

# EMI Test Report

Tested in accordance with  
Federal Communications Commission (FCC)  
Personal Communications Services  
CFR 47, Parts 2, 22 and 24  
and  
Industry Canada, RSS-133 and RSS-128



## Research In Motion Limited

**REPORT NO.:** RIM-0086-0404-01

**PRODUCT MODEL NO:** RAP40GW  
**TYPE NAME:** BlackBerry Wireless Handheld  
**FCC ID:** L6ARAP40GW  
**IC:** 2503A-RAP40GW

**Date:** \_\_\_\_\_ 29 June 2004 \_\_\_\_\_

**Declaration****Statement of Performance:**

The BlackBerry Wireless Handheld, model RAP40GW ASY-07029-001, revision 1G when configured and operated per RIM's operation instructions, performs within the requirements of the test standards.

**Declaration:**

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test equipment used was suitable for the tests performed and within the manufacturers published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

**Tested by**

Maurice Battler  
Compliance Specialist

Date: 29 June 2004



Masud S. Attayi, P.Eng.  
Senior Compliance and Certification Engineer

Date: 05 July 2004

**Reviewed and Approved by:**

Paul G. Cardinal, Ph.D.  
Manager, Compliance and Certification

Date: 08 July 2004

## Table of Contents

A) Scope .....	Pg. 3
B) Product Identification .....	Pg. 3
C) Support Equipment Used for Testing of the EUT .....	Pg. 3
D) Test Voltage .....	Pg. 4
E) Test Results Chart .....	Pg. 4
F) Modifications to EUT .....	Pg. 4
G) Summary of Results .....	Pg. 5
H) Compliance Test Equipment Used .....	Pg. 8

Appendix 1 RF Conducted Emissions Test Data/Plots

Appendix 2 Conducted RF Output Power Test Data

Appendix 3 Frequency Stability Test Data

Appendix 4 Radiated Emissions Test Data

## A) Scope

This report details the results of compliance tests which were performed in accordance to the requirements of:

FCC CFR 47 Part 2, Oct. 1, 2000

FCC CFR 47 Part 22, Subpart H, Cellular Radiotelephone Services, Oct. 1, 2000

FCC CFR 47 Part 24 Subpart E, Broadband PCS, Oct 1, 2000

Industry Canada, RSS-128 Issue 2, Rev 1, Nov. 6/99, 800 MHz Dual-Mode TDMA Cellular Telephones

Industry Canada, RSS-133 Issue 2, Rev. 1 Nov. 6/1999, 2.0 GHz Personal Communications Services

## B) Product Identification

The equipment under test (EUT) was tested at the Research In Motion (RIM) EMI test facility, located at:

305 Phillip Street

Waterloo, Ontario

Canada, N2L 3W8

Phone: 519 888 7465

Fax: 519 888 6906

Web Site: [www.rim.com](http://www.rim.com)

The testing began on April 20, 2004 and completed on June 25, 2004. The sample equipment under test (EUT) included:

- 1a BlackBerry Wireless Handheld, model number RAP40GW, ASY-07029-001 revision 1G, RF PCB version 003, PIN 201052B1, FCC ID L6ARAP40GW, IC: 2503A-RAP40GW.
- 1b BlackBerry Wireless Handheld, model number RAP40GW, ASY-07029-001 revision 1G, RF PCB version 003, PIN 200FA58C, FCC ID L6ARAP40GW, IC: 2503A-RAP40GW.

The transmit frequency ranges for the BlackBerry Wireless Handheld model number RAP40GW are: GSM850 824 to 849 MHz, GSM 880 to 915 MHz, DCS 1710 to 1785 MHz, PCS 1850 to 1910 MHz, Bluetooth 2402 to 2480 MHz.

## C) Support Equipment Used for the Testing of the EUT

- 1) Communication Tester, Rohde & Schwarz, model CMU 200, serial number 100251
- 2) Communication Tester, Rohde & Schwarz, model CMU 200, serial number 837/493/073
- 3) DC Power Supply, H/P, model 6632B, serial number US37472178

**D) Test Voltage**

The ac input voltage was 120 volts, 60 Hz where applicable. This configuration was per RIM's specifications.

**E) Test Results Chart**

SPECIFICATION	Test Type	MEETS REQUIREMENTS	Performed By
FCC CFR 47 Part 22, Subpart H IC RSS-128	Radiated Spurious/harmonic Emissions, ERP, LO	Yes	Masud Attayi
FCC CFR 47 Part 2, Subpart J, Part 22, Subpart H IC RSS-128	Conducted Output Power Conducted Emissions, Occupied Bandwidth, Frequency Stability	Yes	Maurice Battler
FCC CFR 47 Part 24, Subpart E IC RSS-133	Radiated Spurious/harmonic Emissions, EIRP, LO	Yes	Masud Attayi
FCC CFR 47 Part 24, Subpart E IC RSS-133	Conducted Emissions, Occupied Bandwidth, Frequency Stability	Yes	Maurice Battler

**F) Modifications to EUT**

No modifications were required to the EUT.

## G) Summary of Results

- 1) The EUT passed the Conducted Spurious Emissions requirements in the GSM850 band as per 47 CFR 2.1051, CFR 22.917, CFR 22.901(d) and RSS-128. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 10 MHz to 10 GHz.  
See APPENDIX 1 for the test data.
- 2) The EUT passed the Conducted Spurious Emissions requirements in the PCS band as per 47 CFR 2.1051, CFR 24.238(a) and RSS-133. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 10 MHz to 20 GHz.  
See APPENDIX 1 for the test data.
- 3) The EUT passed the Occupied Bandwidth and channel mask requirements in the GSM850 band as per 47 CFR 2.202, CFR 22.917 and RSS-128. The EUT was measured on the low, middle and high channels.  
See APPENDIX 1 for the test data.
- 4) The EUT passed the Occupied Bandwidth and channel mask requirements in the PCS band as per 47 CFR 2.202, CFR 24.238 and RSS-133. The EUT was measured on the low, middle and high channels.  
See APPENDIX 1 for the test data.
- 5) The EUT passed the Conducted RF Output Power requirements for both the GSM850 and PCS bands as per 47 CFR 2.1046(a). The EUT was measured on the low, middle and high channels.  
See APPENDIX 2 for the test data.
- 6) The EUT passed the Frequency Stability vs. Temperature and Voltage requirements for GSM850 band as per 47 CFR 2.1055(a), 2.1055(d), CFR 22.917 and RSS-128.  
The maximum frequency error measured was less than 0.1 ppm.  
The temperature range was from -30°C to +60°C in 10° temperature steps. The EUT was measured on low, middle and high channels at each temperature step. The EUT was measured at low (3.5 volts), nominal (3.8 volts) and high (4.1 volts) dc input voltage at each temperature step and channel at maximum output power.  
See APPENDIX 3 for the test data.

- 7) The EUT passed the Frequency Stability vs. Temperature and Voltage requirements for the PCS band as per 47 CFR 2.1055(a), 2.1055(d), 24.235 and RSS-133. The maximum frequency error measured was less than 0.1 ppm. The temperature range was from -30°C to +60°C in 10 degree temperature steps. The EUT was measured on low, middle and high channels at each temperature step. The EUT was measured at low (3.5 volts), nominal (3.8 volts) and high (4.1 volts) dc input voltage at each temperature step and channel at maximum output power. See APPENDIX 3 for the test data.
- 8) The radiated spurious emissions/harmonics and ERP/EIRP were measured for both GSM850 and PCS bands. The results are within the limits. The EUT was placed on a nonconductive wooden table, 100 cm high that was positioned on a remotely rotatable turntable. The test distance used between the EUT and the receiving antenna was three metres. At this point the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The turntable was rotated to determine the azimuth of the peak emissions. The maximum emissions level was recorded. The measurements were performed in a semi-anechoic chamber. The semi-anechoic chamber FCC registration number is **778487** and the Industry Canada file number is **IC4240**. The EUT was measured on the low, middle and high channels.

The highest ERP in the GSM850 band measured was 27.3 dBm at 837.6 MHz (channel 195). The highest EIRP in the PCS band measured was 31.9 dBm at 1880 MHz (channel 661).

The radiated carrier harmonics were measured up to the 10<sup>th</sup> harmonic for low, middle and high channels in the GSM850 band and PCS band.

The worst test margin for GSM850 band measured was 26.1 dB below the limit at 1648.4 MHz.

The worst test margin for PCS band measured was 25.3 dB below the limit at 3819.6 MHz.

The EUT's RF local oscillator (LO) emissions (transmit mode) were measured in the GSM850 band and PCS band in the standalone configuration in the upright position on the low and high channels. Both the horizontal and vertical polarizations were measured. The RF LO emissions were in the noise floor (NF).

The EUT's IF LO emissions were measured in the GSM band in the standalone configuration in the upright position on middle channel. Both the horizontal and vertical polarizations were measured. The highest emissions measured had a test margin of 8.6 dB at 896.0 MHz.

The EUT's IF local oscillator emissions were measured in the PCS band in the standalone configuration in the upright position on the middle channel. Both the horizontal and vertical polarizations of the emissions were measured. The IF LO was in the NF.

The radiated carrier harmonics were measured up to the 10<sup>th</sup> harmonic for low, middle and high channels in the GSM850 band and PCS band with Bluetooth transmitting.

The worst test margin for GSM850 band measured was 30.3 dB below the limit at 3296.8 MHz.

The worst test margin for PCS band measured was 16.2 dB below the limit at 5640 MHz.

The radiated Bluetooth harmonics in frequency hopping mode were measured up to the 10<sup>th</sup> harmonic. Both the horizontal and vertical polarizations were measured. The RF harmonic emissions above the 3<sup>rd</sup> harmonic were in the NF for PCS band and above the 4<sup>th</sup> harmonic for the GSM850 band.

**Sample Calculation:**

Field Strength (dB $\mu$ V/M) is calculated as follows:

FS = Measured Level (dB $\mu$ V) + A.F. (dB/m) + Cable Loss (dB) - Preamp (dB) + Filter Loss (dB)

**Measurement Uncertainty  $\pm 4.0$  dB**

To view the test data see APPENDIX 4.



**H) Compliance Test Equipment Used**

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Preamplifier	Sonoma	310N/11909A	185831	04-11-06	Radiated Emissions
Preamplifier system	TDK RF Solutions	PA-02	080010	04-11-06	Radiated Emissions
EMC Analyzer	Agilent	E7405A	US40240226	04-07-31	Radiated Emissions
Hybrid Log Antenna	TDK	HLP-3003C	017401	04-07-14	Radiated Emissions
Horn Antenna	TDK	HRN-0118	130092	04-09-16	Radiated Emissions
Horn Antenna	TDK	HRN-0118	30101	04-07-18	Radiated Emissions
Dipole Antenna	Schwarzbeck	UHAP	974	04-09-25	Radiated Emissions
Dipole Antenna	Schwarzbeck	UHAP	973	04-12-01	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	837/493/073	05-05-29	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	100251	05-04-21	Conducted Emissions
Spectrum Analyzer	HP	8563E	3745A08112	04-07-31	Conducted Emissions
DC Power Supply	HP	6632B	US37472178	04-08-01	Conducted Emissions
Temperature Probe	Hart Scientific	61161-302	21352860	04-09-15	Frequency Stability
Environmental Chamber	ESPEC Corp.	SH-240S1	91005607	N/R	Frequency Stability


## APPENDIX 1

### RF CONDUCTED EMISSIONS TEST DATA/PLOTS

RF Conducted Emission Test Data cont'd

This appendix contains measurement data pertaining to conducted spurious emissions, -26 dBc bandwidth, 99% power bandwidth and the channel mask.

**Test Setup Diagram**

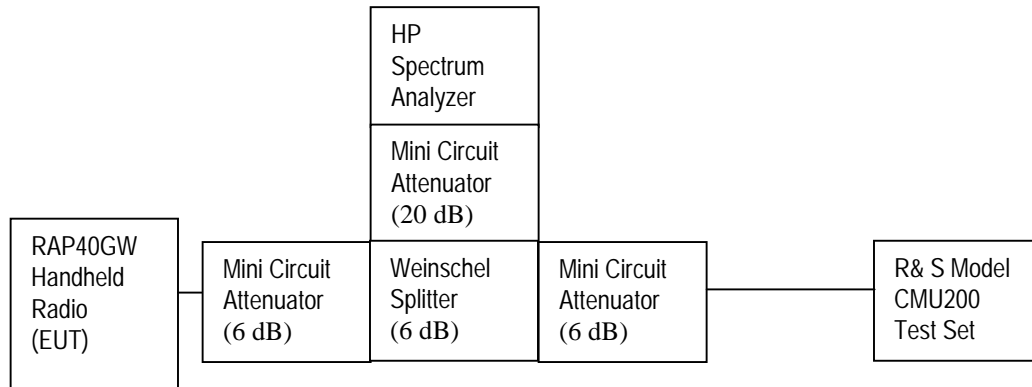

**Test Equipment List**

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	HP	8563E	374A08112	30 Hz – 26.5 GHz
Splitter	Weinschel	1515	ME092	DC – 18 GHz
Attenuator	Mini Circuit	MCL BW-S20W2	--	DC – 18 GHz
Attenuator	Mini Circuit	MCL BW-S6W2	--	DC – 18 GHz
Attenuator	Mini Circuit	MCL BW-S6W2	--	DC – 18 GHz
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	100251	--

RF Conducted Emission Test Data cont'd

**The conducted spurious emissions** – As per 47 CFR 2.1051, CFR 24.238(a), RSS-133, CFR 22 Subpart H and RSS-128 were measured from 10 MHz to 20 GHz. The EUT has a test margin of greater than 20 dB.

See figures 1 to 12 for the plots of the conducted spurious emissions.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

For each carrier frequency of low, middle and high, the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth.

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case emission bandwidth for the three GSM850 channels was measured to be 283 kHz, and for the three PCS channels was measured to be 282 kHz as shown below, which results in 3.0 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was employed.

***Test Data for GSM850 and PCS selected Frequencies***

<b>GSM850 Frequency (MHz)</b>	<b>-26dBc Bandwidth (kHz)</b>	<b>-99% Occupied Bandwidth (kHz)</b>
824.2	283	248.3
837.6	277	248.3
848.8	272	250.0

<b>PCS Frequency (MHz)</b>	<b>-26dBc Bandwidth (kHz)</b>	<b>99% Occupied Bandwidth (kHz)</b>
1850.2	268	245.0
1880.0	263	246.7
1909.8	282	246.7

***Measurement Plots for GSM850 and PCS***

Refer to the following measurement plots for more detail.

See Figures 1 to 12 for plots of the Spurious Emission results


See Figures 13 to 24 for the plots of the –26dBc Bandwidth and 99% Occupied Bandwidth.

See Figures 25 to 28 for plots of the channel mask results.


The RF power output was at maximum for all the recorded measurements shown below.



RF Conducted Emission Test Data cont'd

**Figure 1: GSM 850, Spurious Conducted Emissions, Low channel**

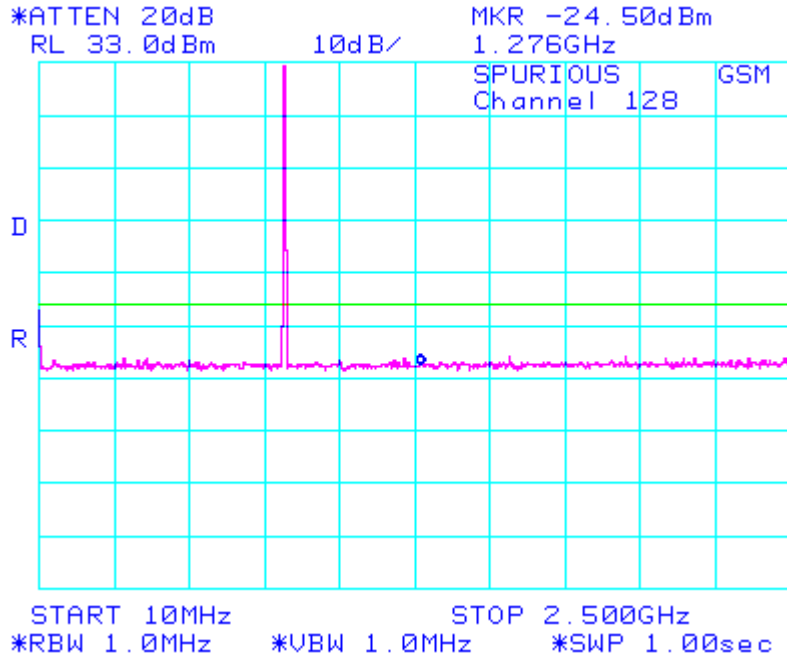


**Figure 2: GSM 850, Spurious Conducted Emissions, Low channel**

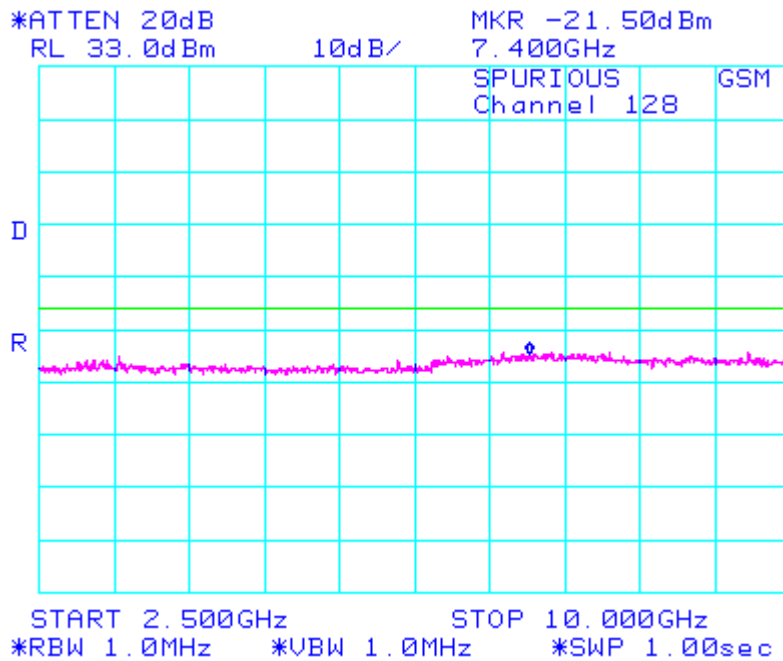

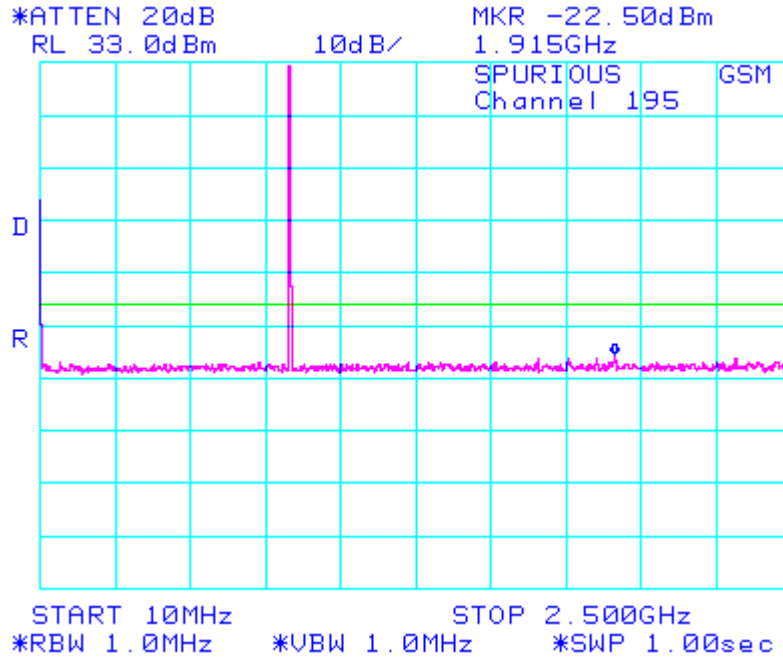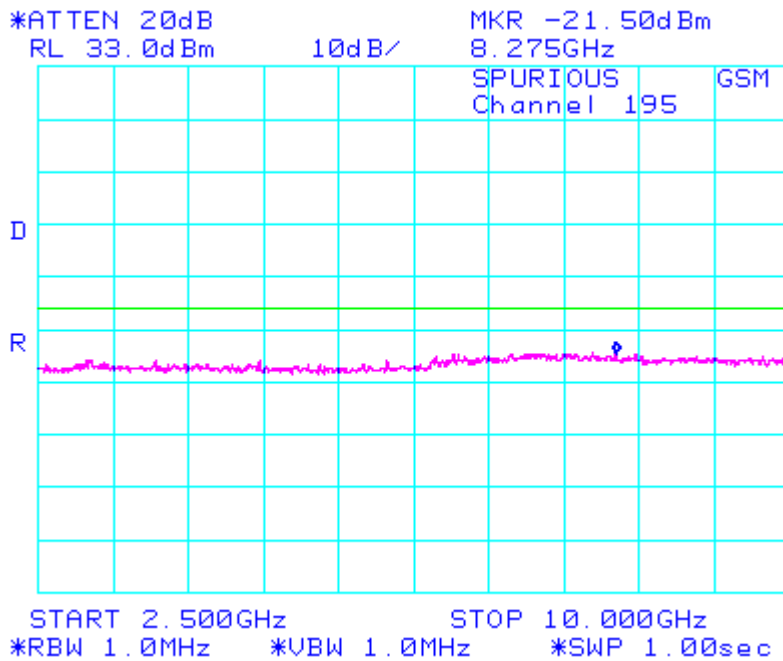
RF Conducted Emission Test Data cont'd
**Figure 3: GSM 850, Spurious Conducted Emissions, Middle Channel**

**Figure 4: GSM 850, Spurious Conducted Emissions, Middle Channel**


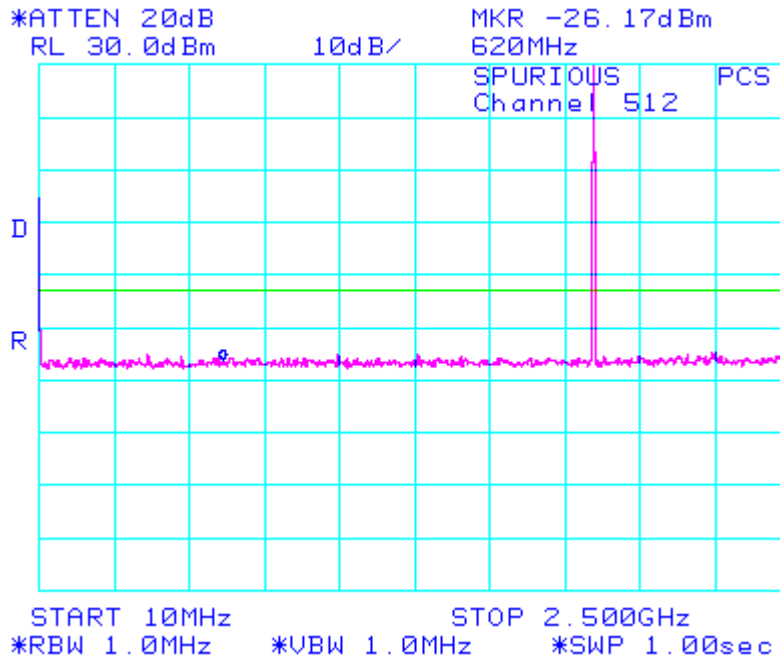
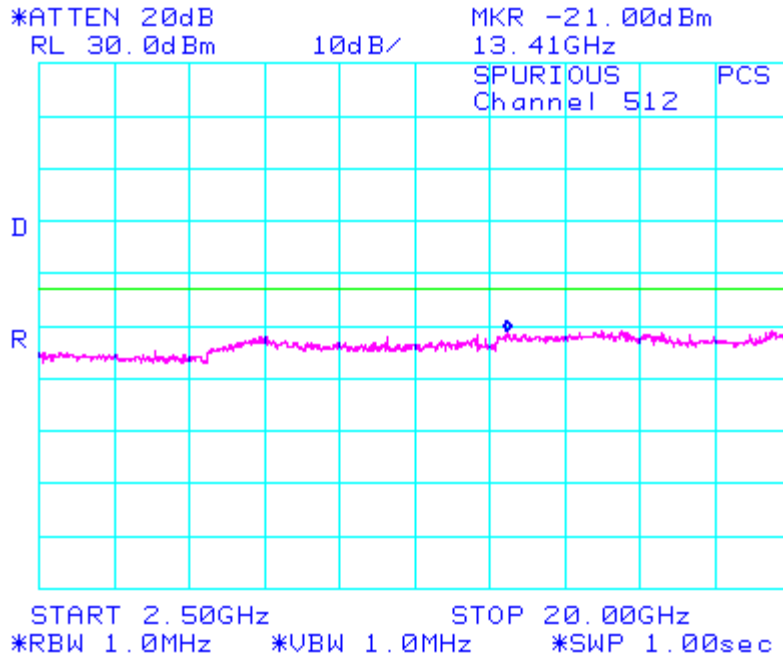
RF Conducted Emission Test Data cont'd

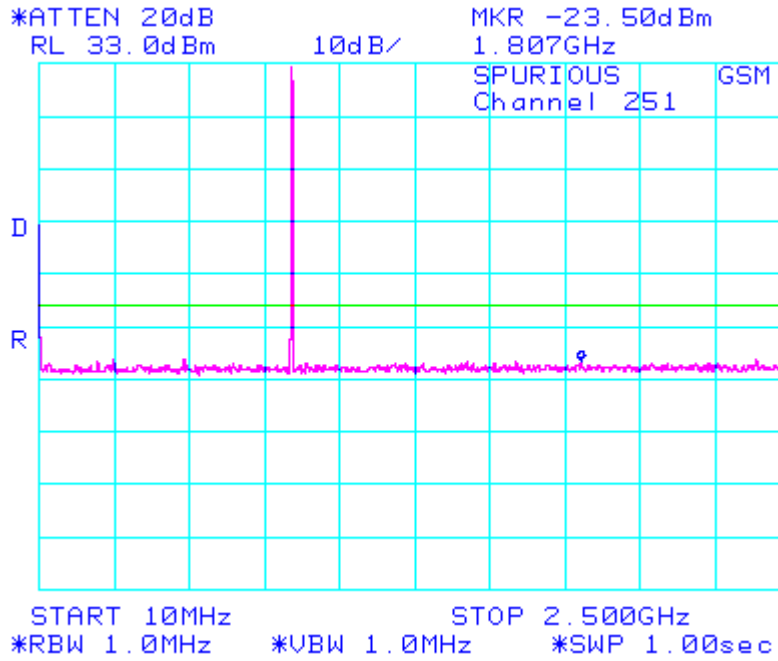**Figure 5: GSM 850, Spurious Conducted Emissions, High Channel**

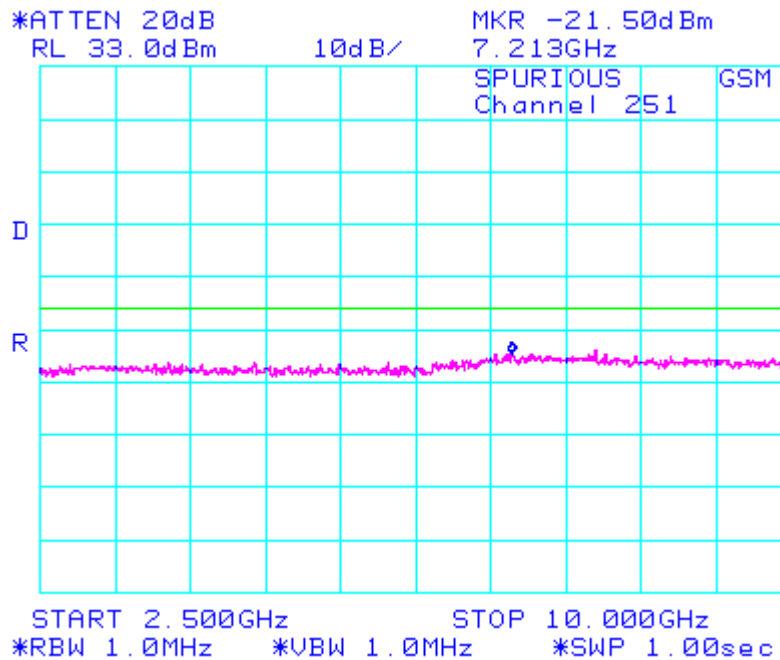

**Figure 6: GSM 850, Spurious Conducted Emissions, High Channel**




RF Conducted Emission Test Data cont'd**Figure 7: PCS, Spurious Conducted Emissions, Low Channel****Figure 8: PCS, Spurious Conducted Emissions, Low Channel**




RF Conducted Emission Test Data cont'd

**Figure 9: PCS, Spurious Conducted Emissions, Middle Channel**

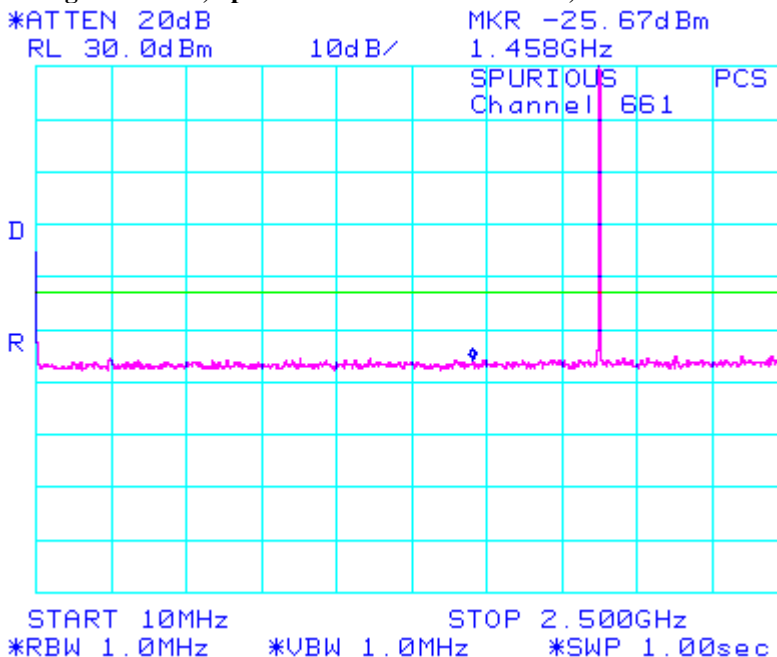


**Figure 10: PCS, Spurious Conducted Emissions, Middle Channel**

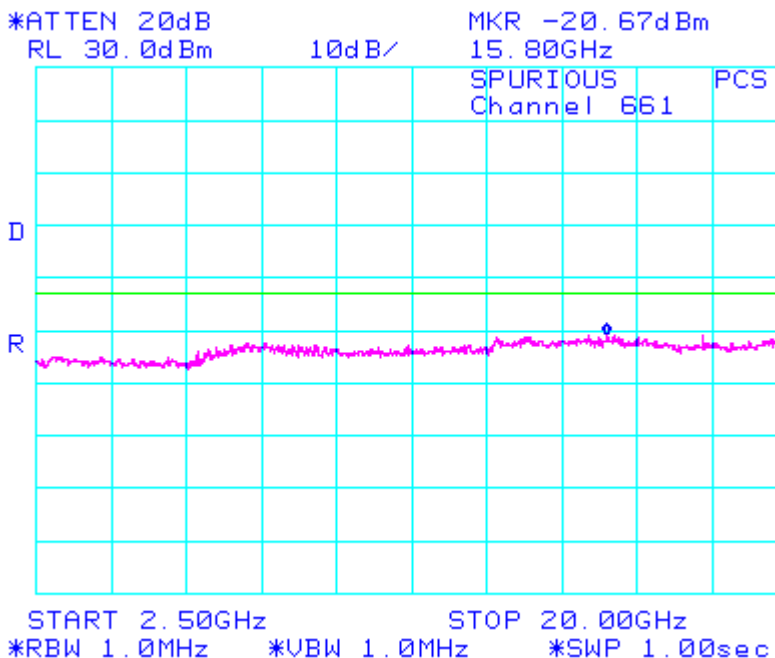


RF Conducted Emission Test Data cont'd

**Figure 11: PCS, Spurious Conducted Emissions, High Channel**

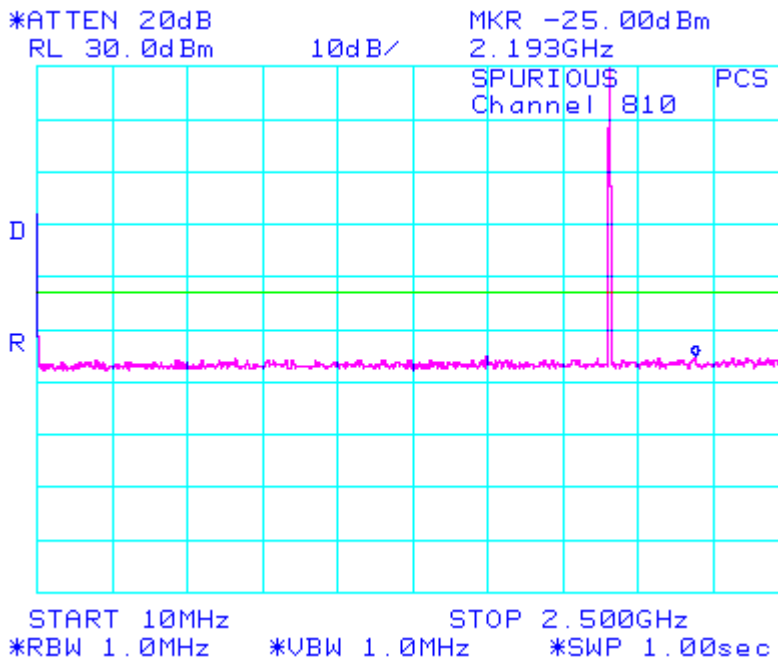

**Figure 12: PCS, Spurious Conducted Emissions, High Channel**

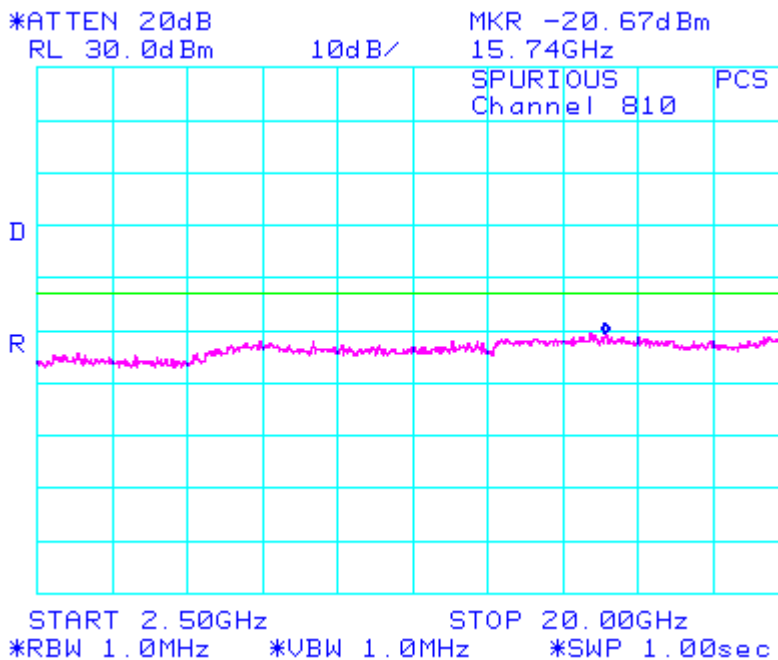

RF Conducted Emission Test Data cont'd

Figure 13: -26dBc bandwidth, GSM 850 Low Channel




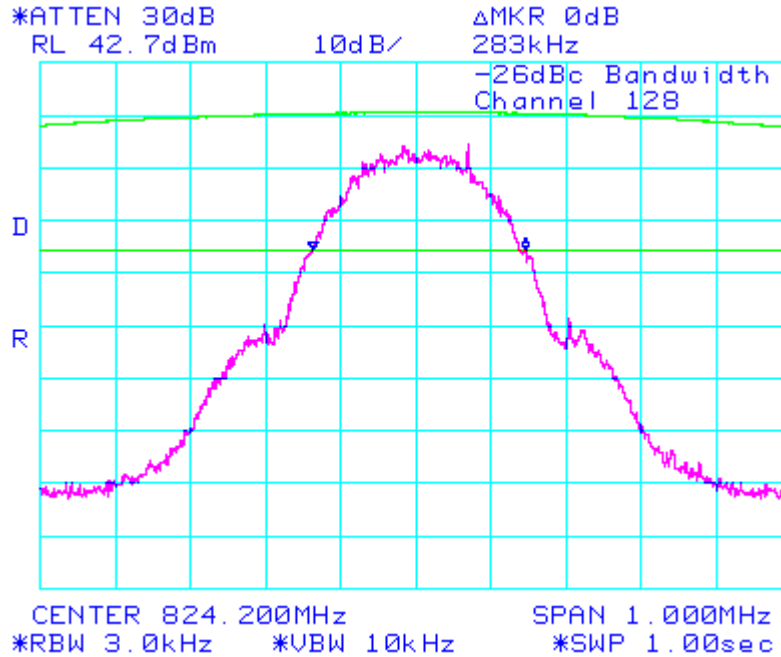



Figure 14: Occupied Bandwidth, GSM 850 Low Channel

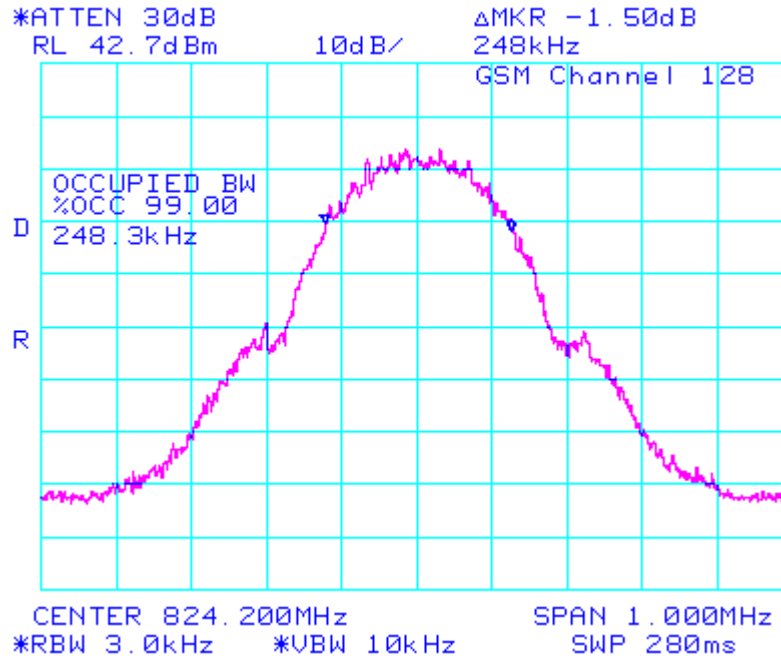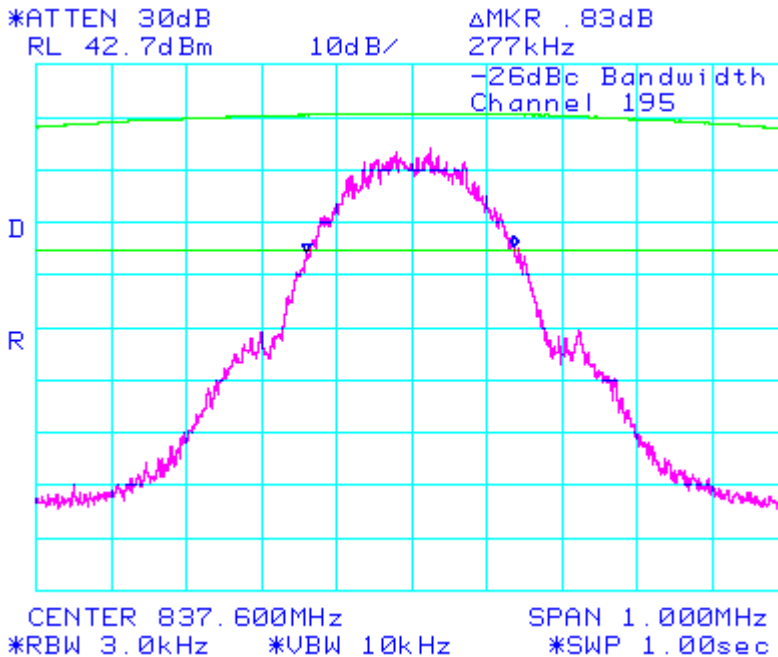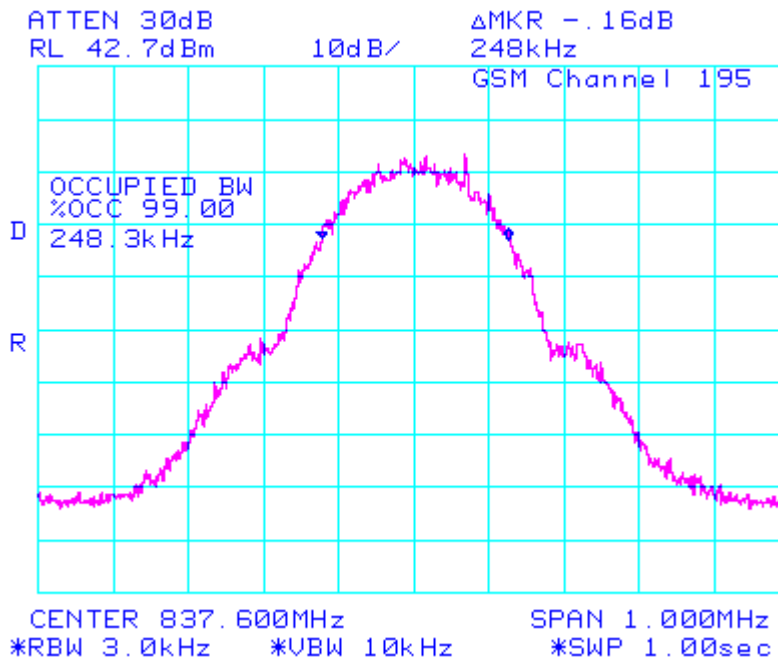


RF Conducted Emission Test Data cont'd**Figure 15: -26dBc bandwidth, GSM 850 Middle Channel****Figure 16: Occupied Bandwidth, GSM 850 Middle Channel**

RF Conducted Emission Test Data cont'd

**Figure 17: -26dBc bandwidth, GSM 850 High Channel**

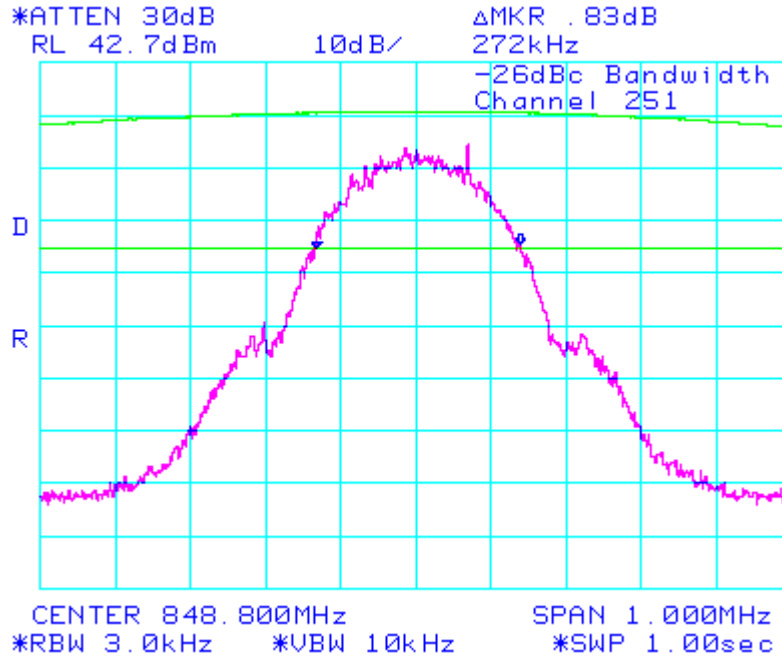


**Figure 18: Occupied Bandwidth, GSM 850 High Channel**

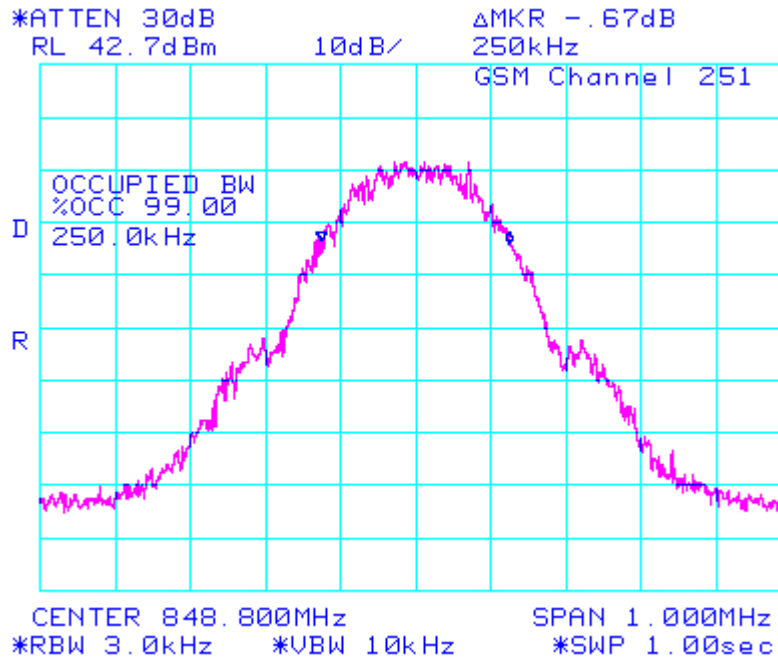




**RF Conducted Emission Test Data cont'd**

**Figure 19: -26dBc bandwidth, PCS Low Channel**

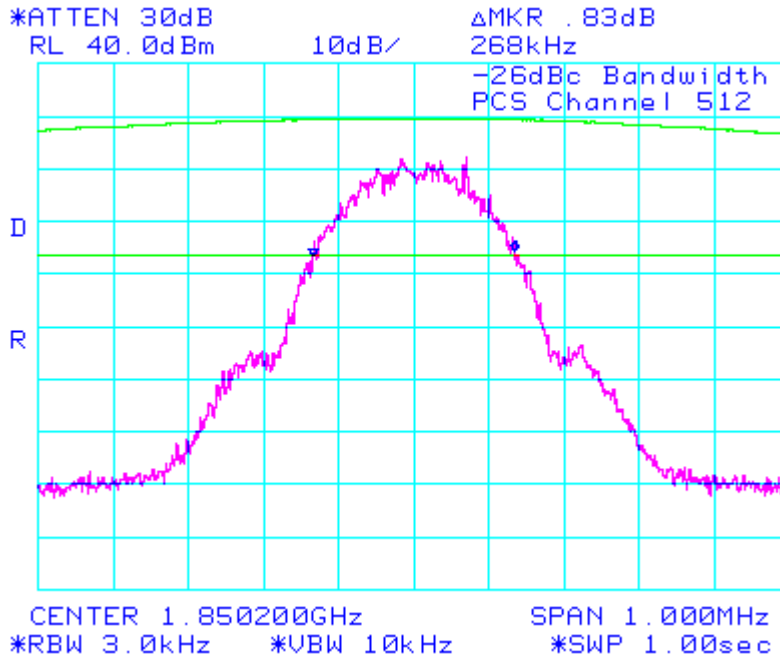


**Figure 20: Occupied Bandwidth, PCS Low Channel**

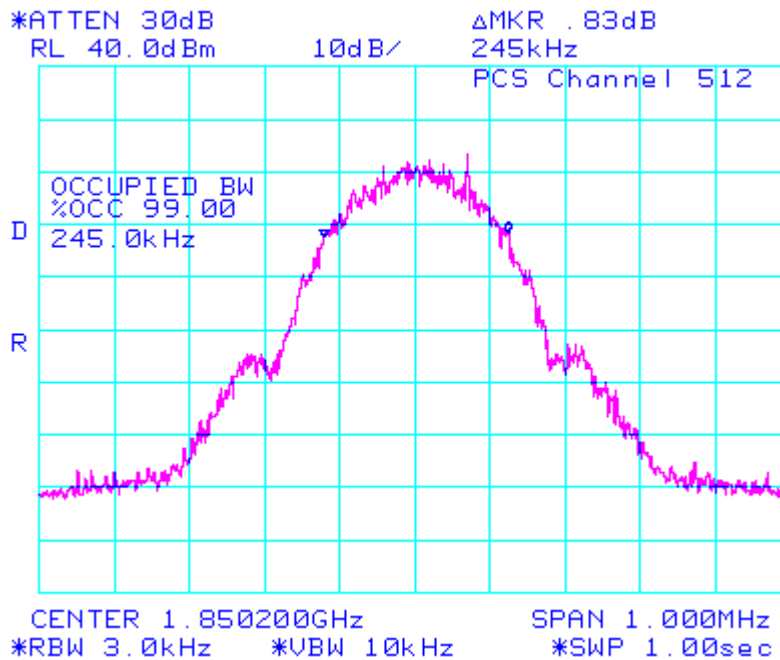

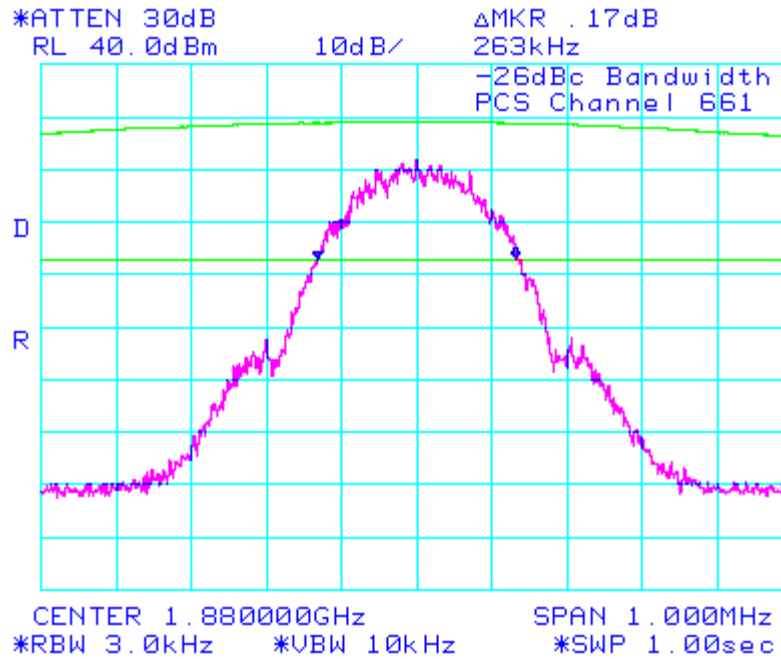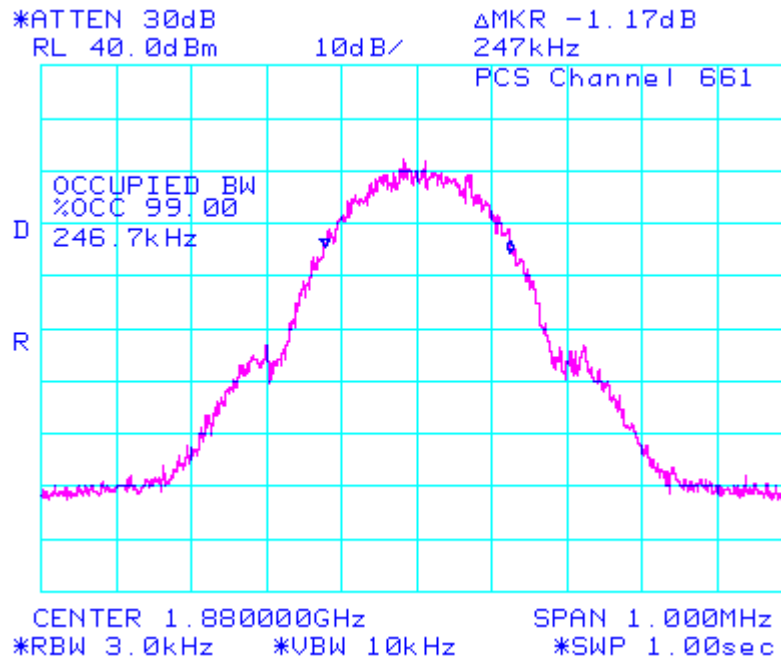
RF Conducted Emission Test Data cont'd
**Figure 21: -26dBc bandwidth, PCS Middle Channel**

**Figure 22: Occupied Bandwidth, PCS Middle Channel**


RF Conducted Emission Test Data cont'd

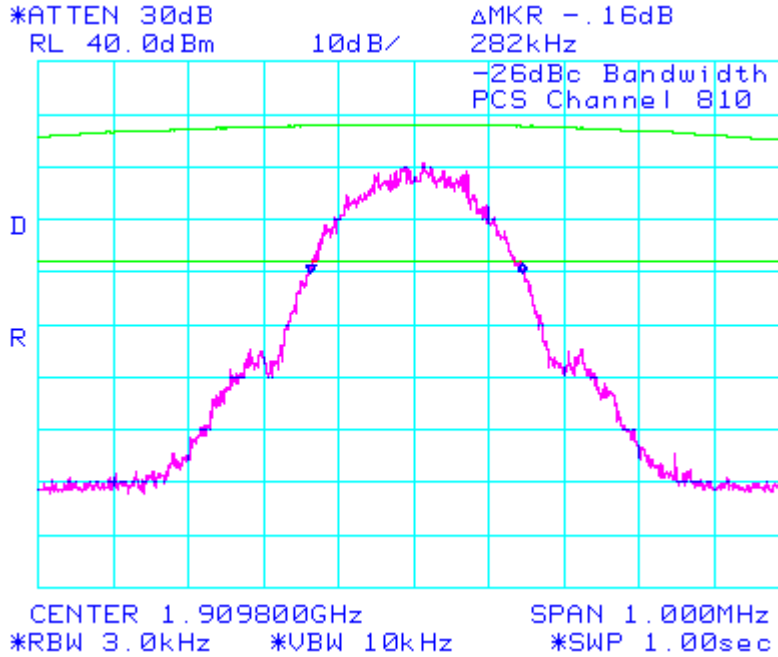**Figure 23: -26dBc bandwidth, PCS High Channel**

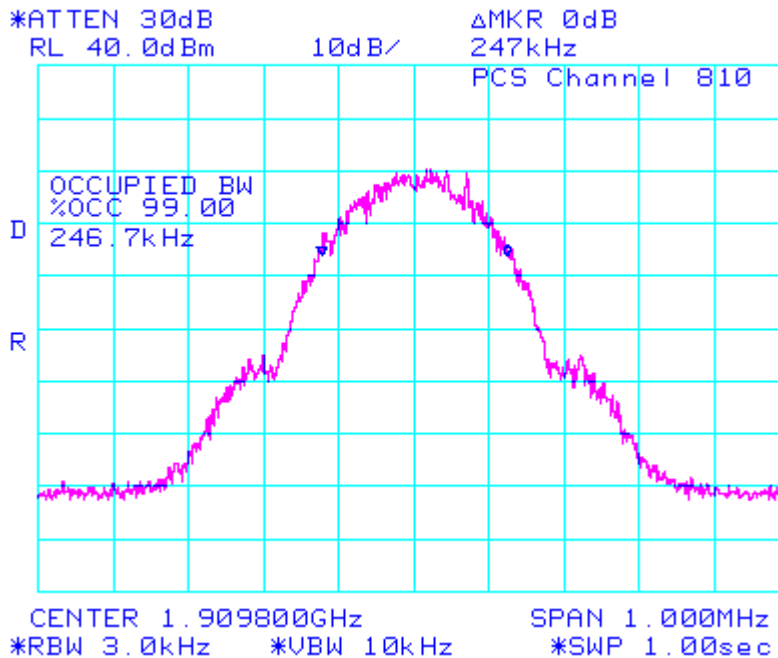


**Figure 24: Occupied Bandwidth, PCS High Channel**






RF Conducted Emission Test Data cont'd

**Figure 25: GSM 850, Low Channel Mask**

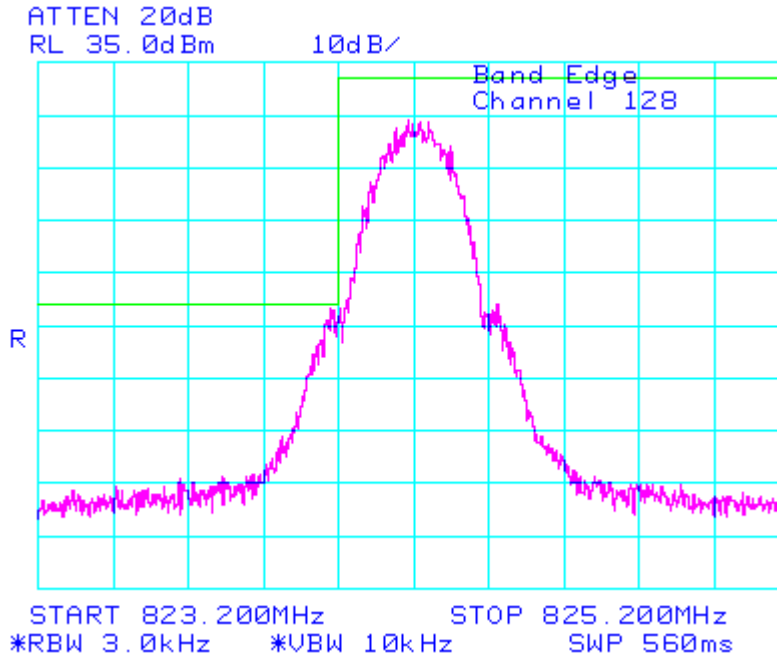


**Figure 26: GSM 850 High Channel Mask**

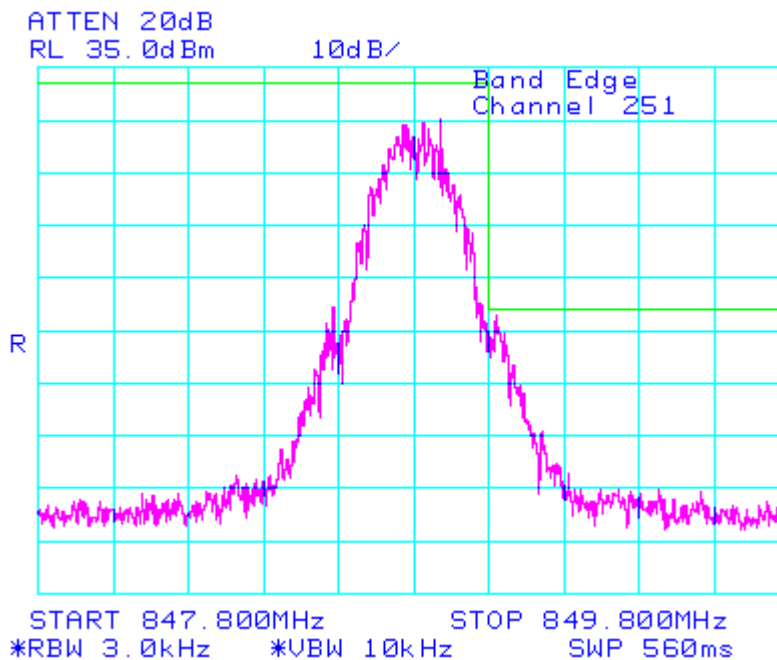


RF Conducted Emission Test Data cont'd

**Figure27: PCS, Low Channel Mask**

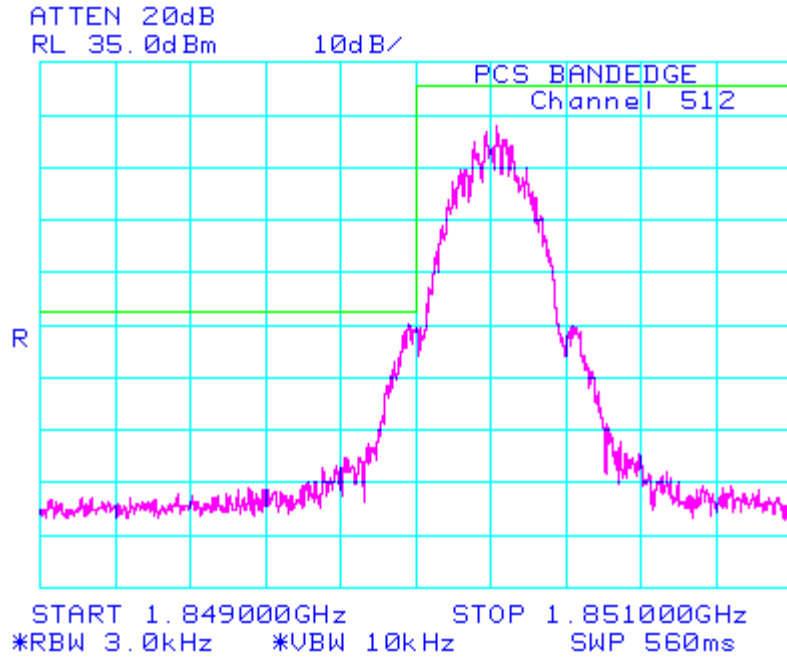


**Figure28: PCS, High Channel Mask**

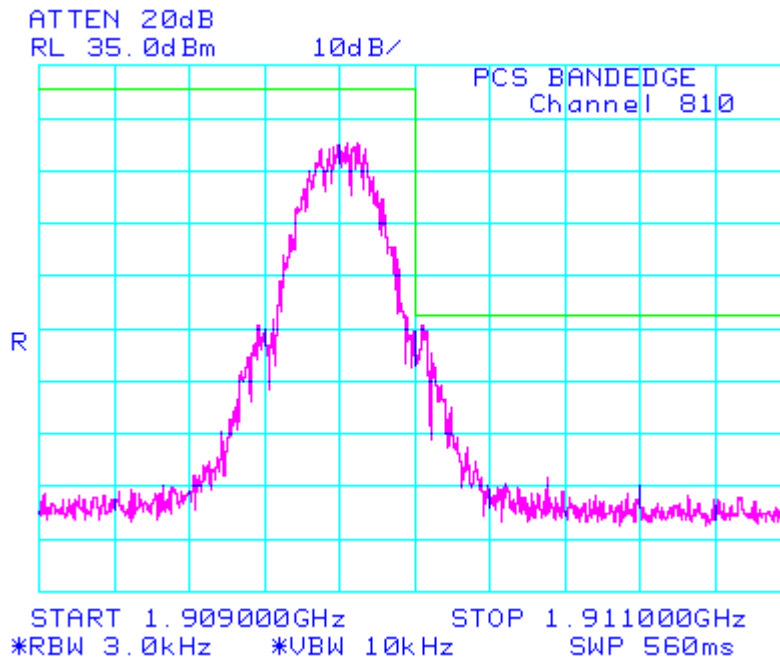

RF Conducted Emission Test Data cont'd

FCC CFR 47 Part 24, Subpart E, RSS-133

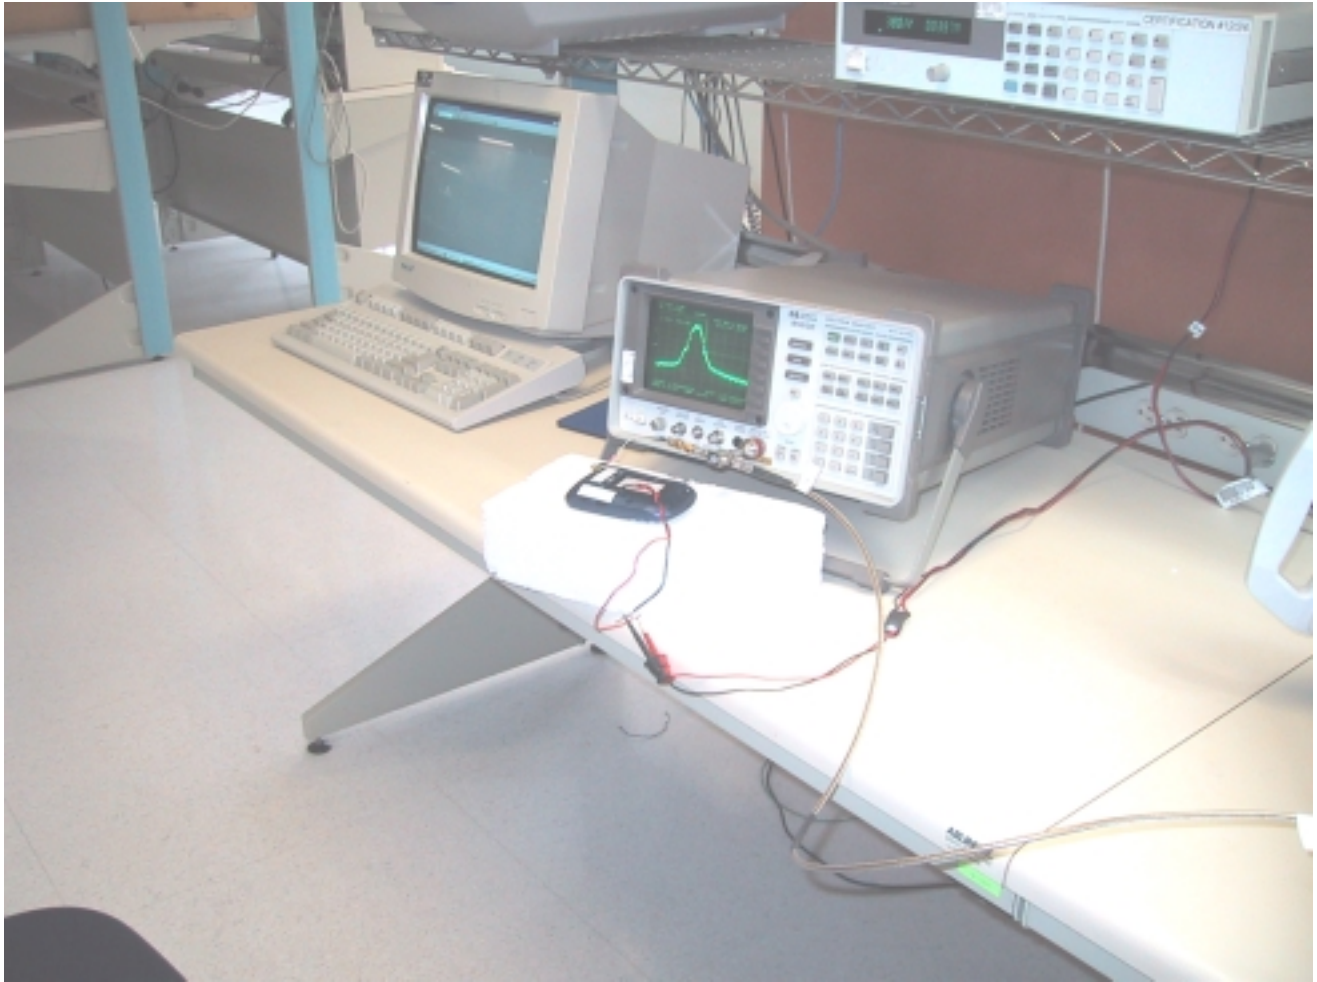

## APPENDIX 2

### CONDUCTED RF OUTPUT POWER TEST DATA

### Conducted RF Output Power Test Data

The conducted RF output power was measured using the Communication Tester, Rohde & Schwarz, model CMU 200. The low, middle and high channels were measured at maximum radio output power. The insertion loss of the coaxial cable from the CMU 200 to the Handheld was compensated for in the measurements.

Peak nominal output power is 32.7 dBm  $\pm$ 0.3 dB for GSM850 and 30 dBm  $\pm$ 0.3 dB for PCS.


### Test Results

Channel	Frequency (MHz)	Maximum Output Power (dBm)
<u>GSM850</u>		
128	824.20	32.70
189	837.60	32.80
251	848.80	32.80
<u>PCS</u>		
512	1850.2	30.00
661	1880.0	30.20
810	1909.8	29.70

## APPENDIX 3

### FREQUENCY STABILITY TEST DATA

Frequency Stability Test Data

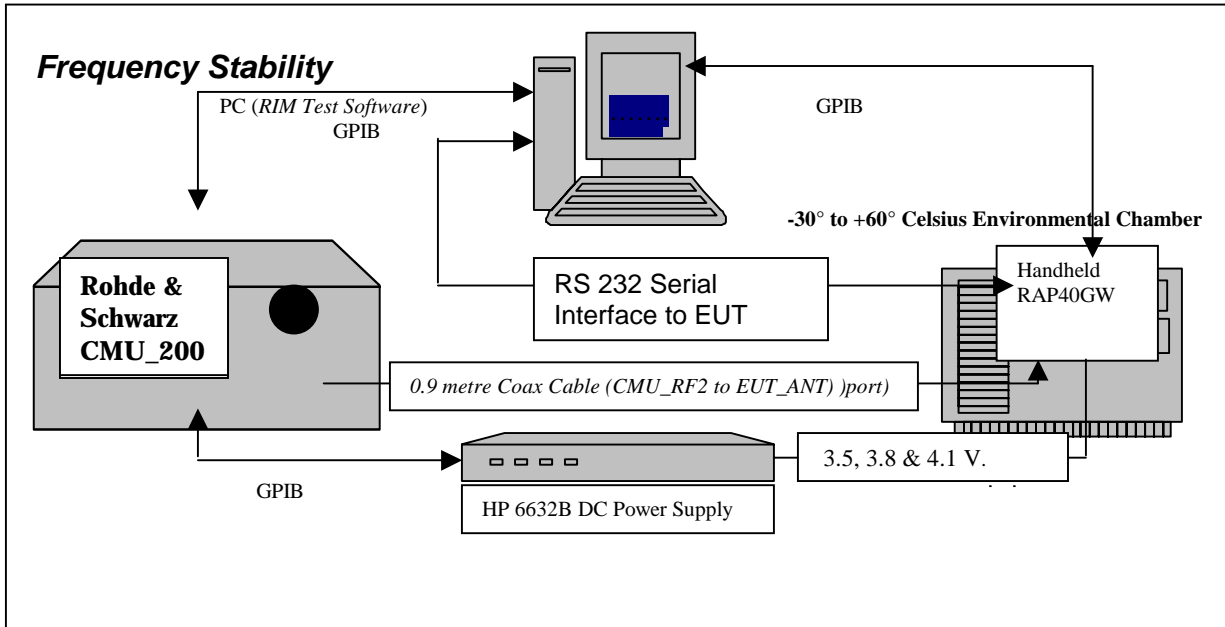

SYSTEM	Model	Serial Number	Calibration Due Date.
R & S Universal Radio Communication Test Set	CMU200	100251	21-April-2005
HP System DC Power Supply	6632B	US37472178	01-Aug-2004
Network Analyzer	HP 8753D	3410A07083	31-July-2004
Calibration Kit	HP85033C	2920A02997	20-Aug-2004
Espec Environmental Chamber	SH240S1	91004919	N/A
Hart Temperature Probe	61161-302	21352860	15-Sept-2004

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.995 Frequency Stability - Procedures

- (a,b) Frequency Stability - Temperature Variation
- (d) Frequency Stability - Voltage Variation

**24.235** *Frequency Stability.*

*The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.*

The RAP40GW handheld, (referred as EUT herein and after) transmitted frequencies are less than 0.1 ppm of the received frequency from the Rhode & Schwarz CMU 200 Universal Radio Communication Test Set.

*The EUT meets the requirements as stated in CFR 47 chapter 1, Section 24.235, RSS-133, CFR 47 chapter 1, Section 22.917 and RSS-128 Frequency Stability.*

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-meter coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMU 200 and the EUT antenna port; located inside the environmental chamber.

Calibration for the Cable Loss was performed in the RF Laboratory on 30 April 2004.

**Procedure:**

Full\_ Two port Calibration of 8720D using the 85033D was completed.

The cable assembly from the RF input to the RF output was measured at the following Frequencies:

PCS Frequency (MHz)	Cable loss (dB)
1850.2	1.26
1880.0	1.26
1909.8	1.26

GSM 850 Frequency (MHz)	Cable loss (dB)
824.2	0.83
836.4	0.83
848.6	0.83

**Procedure:**

The EUT was placed in the Temperature chamber and connected to CMU 200 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the measurements were to be made.

The chamber was switched on and the temperature was set to -30°C.

After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled.

The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMU 200 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.5 volts, to 3.8 volts to 4.1 volts nominal voltage.

The frequency error was measured at a maximum output power and recorded by the automated system test software.



The EUT output power and frequency was measured at 3.5 volts, 3.8 volts and 4.1 volts. The transmit frequency was varied in 3 steps consisting of 824.2, 836.4, and 848.6 MHz for the GSM850 band and 1850.2, 1880.0 and 1909.8 MHz for the PCS band. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the start of the measurement tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

#### PROCEDURE:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

1. Switch on the HP 6632B power supply; CMU 200 Communications test Set, and Environmental Chamber.
2. Start test program
3. Set the Temperature to  $-30$  degrees Celsius and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.5 Volts.
5. Set up CMU 200 Radio Communication Tester.
6. Command the CMU 200 to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the CMU 200 test set.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the CMU 200, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power, Frequency Error.
10. The CMU 200 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
11. Repeat steps 5 to 10 changing the supply voltage to 3.8 Volts
12. Increase temperature by  $10^{\circ}\text{C}$  and soak for 1/2 hour.
13. Repeat steps 4 - 12 for temperatures  $-30$  degrees to  $60$  degrees Celsius.
14. Repeat steps 5 to 10 changing the supply voltage to 4.1 Volts

Procedure 5 to 10 was repeated at room temperature ( $20^{\circ}\text{C}$ ) with the power supply voltage set to 3.5, 3.8 and 4.1 Volts.

The maximum frequency error in the GSM850 band measured was 0.0756 PPM.

The maximum frequency error in the PCS band measured was 0.0381 PPM.

GSM850 Channel results: channels 128, 189 and 250 @ 20°C maximum transmitted power

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.5	20	30.740	0.0373
189	836.4	3.5	20	35.640	0.0426
250	848.6	3.5	20	53.340	0.0629

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.8	20	30.740	0.0373
189	836.4	3.8	20	35.640	0.0426
250	848.6	3.8	20	53.340	0.0629

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	4.1	20	30.930	0.0375
189	836.4	4.1	20	31.960	0.0382
250	848.6	4.1	20	56.440	0.0665

GSM850 Results: channel 128 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.5	-30	60.250	0.0731
128	824.2	3.5	-20	46.490	0.0564
128	824.2	3.5	-10	49.200	0.0597
128	824.2	3.5	0	19.050	0.0231
128	824.2	3.5	10	23.440	0.0284
128	824.2	3.5	20	30.740	0.0373
128	824.2	3.5	30	47.650	0.0578
128	824.2	3.5	40	48.690	0.0591
128	824.2	3.5	50	50.560	0.0613
128	824.2	3.5	60	62.180	0.0754

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.8	-30	45.780	0.0555
128	824.2	3.8	-20	39.450	0.0479
128	824.2	3.8	-10	48.300	0.0586
128	824.2	3.8	0	-27.830	-0.0338
128	824.2	3.8	10	-13.240	-0.0161
128	824.2	3.8	20	30.740	0.0373
128	824.2	3.8	30	48.620	0.0590
128	824.2	3.8	40	48.950	0.0594
128	824.2	3.8	50	51.530	0.0625
128	824.2	3.8	60	53.210	0.0646

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	4.1	-30	47.400	0.0575
128	824.2	4.1	-20	39.650	0.0481
128	824.2	4.1	-10	45.590	0.0553
128	824.2	4.1	0	-21.570	-0.0262
128	824.2	4.1	10	27.830	0.0338
128	824.2	4.1	20	30.930	0.0375
128	824.2	4.1	30	54.050	0.0656
128	824.2	4.1	40	45.780	0.0555
128	824.2	4.1	50	57.730	0.0700
128	824.2	4.1	60	61.020	0.0740

GSM850 Results: channel 189 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.4	3.5	-30	56.500	0.0676
189	836.4	3.5	-20	51.140	0.0611
189	836.4	3.5	-10	44.810	0.0536
189	836.4	3.5	0	49.530	0.0592
189	836.4	3.5	10	54.950	0.0657
189	836.4	3.5	20	35.640	0.0426
189	836.4	3.5	30	51.210	0.0612
189	836.4	3.5	40	50.040	0.0598
189	836.4	3.5	50	51.720	0.0618
189	836.4	3.5	60	54.890	0.0656

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.4	3.8	-30	54.820	0.0655
189	836.4	3.8	-20	49.980	0.0598
189	836.4	3.8	-10	48.300	0.0577
189	836.4	3.8	0	49.590	0.0593
189	836.4	3.8	10	47.980	0.0574
189	836.4	3.8	20	35.640	0.0426
189	836.4	3.8	30	53.720	0.0642
189	836.4	3.8	40	51.920	0.0621
189	836.4	3.8	50	56.630	0.0677
189	836.4	3.8	60	53.010	0.0634

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.4	4.1	-30	54.180	0.0648
189	836.4	4.1	-20	52.170	0.0624
189	836.4	4.1	-10	45.010	0.0538
189	836.4	4.1	0	46.490	0.0556
189	836.4	4.1	10	54.630	0.0653
189	836.4	4.1	20	31.960	0.0382
189	836.4	4.1	30	53.590	0.0641
189	836.4	4.1	40	49.590	0.0593
189	836.4	4.1	50	58.760	0.0703
189	836.4	4.1	60	57.660	0.0689

GSM850 Results: channel 250 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
250	848.6	3.5	-30	59.020	0.0695
250	848.6	3.5	-20	56.630	0.0667
250	848.6	3.5	-10	53.140	0.0626
250	848.6	3.5	0	48.040	0.0566
250	848.6	3.5	10	42.550	0.0501
250	848.6	3.5	20	53.340	0.0629
250	848.6	3.5	30	50.750	0.0598
250	848.6	3.5	40	46.620	0.0549
250	848.6	3.5	50	58.570	0.0690
250	848.6	3.5	60	58.500	0.0689

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
250	848.6	3.8	-30	57.340	0.0676
250	848.6	3.8	-20	61.540	0.0725
250	848.6	3.8	-10	51.400	0.0606
250	848.6	3.8	0	40.550	0.0478
250	848.6	3.8	10	43.390	0.0511
250	848.6	3.8	20	53.340	0.0629
250	848.6	3.8	30	47.400	0.0559
250	848.6	3.8	40	44.490	0.0524
250	848.6	3.8	50	58.050	0.0684
250	848.6	3.8	60	64.180	0.0756

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
250	848.6	4.1	-30	55.660	0.0656
250	848.6	4.1	-20	57.600	0.0679
250	848.6	4.1	-10	54.370	0.0641
250	848.6	4.1	0	40.680	0.0479
250	848.6	4.1	10	46.430	0.0547
250	848.6	4.1	20	56.440	0.0665
250	848.6	4.1	30	47.270	0.0557
250	848.6	4.1	40	46.430	0.0547
250	848.6	4.1	50	57.020	0.0672
250	848.6	4.1	60	61.800	0.0728

PCS Channel results: channels 512, 661, & 810 @ 20°C maximum transmitted power

<i>Traffic Channel Number</i>	<i>PCS Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	3.5	20	30.740	0.0166
661	1880.0	3.5	20	28.730	0.0153
810	1909.8	3.5	20	34.220	0.0179

<i>Traffic Channel Number</i>	<i>PCS Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	3.8	20	33.380	0.0180
661	1880.0	3.8	20	37.970	0.0202
810	1909.8	3.8	20	49.270	0.0258

<i>Traffic Channel Number</i>	<i>PCS Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	4.1	20	34.350	0.0186
661	1880.0	4.1	20	49.010	0.0261
810	1909.8	4.1	20	48.820	0.0256

PCS 1900 Results: channel 512 @ maximum transmitted power

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	3.5	-30	36.030	0.0195
512	1850.2	3.5	-20	52.170	0.0282
512	1850.2	3.5	-10	30.030	0.0162
512	1850.2	3.5	0	43.780	0.0237
512	1850.2	3.5	10	29.060	0.0157
512	1850.2	3.5	20	30.740	0.0166
512	1850.2	3.5	30	24.340	0.0132
512	1850.2	3.5	40	28.090	0.0152
512	1850.2	3.5	50	32.930	0.0178
512	1850.2	3.5	60	34.610	0.0187

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	3.8	-30	-27.770	-0.0150
512	1850.2	3.8	-20	33.320	0.0180
512	1850.2	3.8	-10	18.340	0.0099
512	1850.2	3.8	0	35.000	0.0189
512	1850.2	3.8	10	-19.760	-0.0107
512	1850.2	3.8	20	33.380	0.0180
512	1850.2	3.8	30	18.850	0.0102
512	1850.2	3.8	40	28.350	0.0153
512	1850.2	3.8	50	19.440	0.0105
512	1850.2	3.8	60	21.180	0.0114

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	4.1	-30	36.420	0.0197
512	1850.2	4.1	-20	29.060	0.0157
512	1850.2	4.1	-10	36.740	0.0199
512	1850.2	4.1	0	-38.680	-0.0209
512	1850.2	4.1	10	24.730	0.0134
512	1850.2	4.1	20	34.350	0.0186
512	1850.2	4.1	30	31.320	0.0169
512	1850.2	4.1	40	27.250	0.0147
512	1850.2	4.1	50	15.430	0.0083
512	1850.2	4.1	60	19.05	0.0103

PCS 1900 Results: channel 661 @ maximum transmitted power

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
661	1880.0	3.5	-30	48.560	0.0258
661	1880.0	3.5	-20	57.470	0.0306
661	1880.0	3.5	-10	40.290	0.0214
661	1880.0	3.5	0	49.400	0.0263
661	1880.0	3.5	10	27.310	0.0145
661	1880.0	3.5	20	28.730	0.0153
661	1880.0	3.5	30	30.030	0.0160
661	1880.0	3.5	40	39.780	0.0212
661	1880.0	3.5	50	21.950	0.0117
661	1880.0	3.5	60	29.120	0.0155

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
661	1880.0	3.8	-30	64.640	0.0344
661	1880.0	3.8	-20	45.850	0.0244
661	1880.0	3.8	-10	58.050	0.0309
661	1880.0	3.8	0	54.240	0.0289
661	1880.0	3.8	10	45.390	0.0241
661	1880.0	3.8	20	37.970	0.0202
661	1880.0	3.8	30	28.350	0.0151
661	1880.0	3.8	40	35.390	0.0188
661	1880.0	3.8	50	22.660	0.0121
661	1880.0	3.8	60	32.030	0.0170

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
661	1880.0	4.1	-30	67.090	0.0357
661	1880.0	4.1	-20	62.570	0.0333
661	1880.0	4.1	-10	60.700	0.0323
661	1880.0	4.1	0	62.380	0.0332
661	1880.0	4.1	10	35.000	0.0186
661	1880.0	4.1	20	49.010	0.0261
661	1880.0	4.1	30	38.870	0.0207
661	1880.0	4.1	40	30.090	0.0160
661	1880.0	4.1	50	20.470	0.0109
661	1880.0	4.1	60	23.760	0.0126



PCS 1900 Results: channel 810 @ maximum transmitted power

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
810	1909.8	3.5	-30	41.970	0.0220
810	1909.8	3.5	-20	58.440	0.0306
810	1909.8	3.5	-10	51.210	0.0268
810	1909.8	3.5	0	65.860	0.0345
810	1909.8	3.5	10	33.250	0.0174
810	1909.8	3.5	20	34.220	0.0179
810	1909.8	3.5	30	33.770	0.0177
810	1909.8	3.5	40	37.970	0.0199
810	1909.8	3.5	50	28.280	0.0148
810	1909.8	3.5	60	30.030	0.0157

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
810	1909.8	3.8	-30	49.660	0.0260
810	1909.8	3.8	-20	62.310	0.0326
810	1909.8	3.8	-10	65.150	0.0341
810	1909.8	3.8	0	57.990	0.0304
810	1909.8	3.8	10	55.980	0.0293
810	1909.8	3.8	20	49.270	0.0258
810	1909.8	3.8	30	26.090	0.0137
810	1909.8	3.8	40	41.840	0.0219
810	1909.8	3.8	50	32.220	0.0169
810	1909.8	3.8	60	25.120	0.0132

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
810	1909.8	4.1	-30	56.630	0.0297
810	1909.8	4.1	-20	62.180	0.0326
810	1909.8	4.1	-10	58.110	0.0304
810	1909.8	4.1	0	72.770	0.0381
810	1909.8	4.1	10	47.070	0.0246
810	1909.8	4.1	20	48.820	0.0256
810	1909.8	4.1	30	40.490	0.0212
810	1909.8	4.1	40	35.060	0.0184
810	1909.8	4.1	50	24.860	0.0130
810	1909.8	4.1	60	24.090	0.0126

## APPENDIX 4

### RADIATED EMISSIONS TEST DATA

Radiated Emissions Test Data Results

Test distance is 3.0 metres

June 25, 2004

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H)	Reading (dBm)	Corrected Reading (relative to dipole)	Pol.	Limit	Diff to Limit (dB)
<b>GSM850 Band (ERP)</b>												
Handheld Standalone, on its side												
F0	128	824.20	850	Dipole	V	78.0	86.4	7.7	24.05	V V	27.78	-3.73
F0	128	824.20	850	Dipole	H	86.4		6.1		H H		
F0	195	837.60	850	Dipole	V	78.6	87.7	10.9	27.25	V V	27.78	-0.53
F0	195	837.60	850	Dipole	H	87.7		8.8		H H		
F0	251	848.80	850	Dipole	V	80.6	88.7	9.9	26.25	V V	27.78	-1.53
F0	251	848.80	850	Dipole	H	88.7		7.8		H H		

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

June 25, 2004

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit	Diff to Limit (dB)
<b>GSM850 Band (Harmonics)</b>												
Handheld Standalone, upright position												
<b>Low Channel – 824.2 MHz</b>												
2 <sup>nd</sup>	128	1648.40	850	Horn	V	60.8	60.8	V-V	-41.8	-39.1	-13	-26.1
2 <sup>nd</sup>	128	1648.40	850	Horn	H	58.9		H-H	-42.1			
3 <sup>rd</sup>	128	2472.60	850	Horn	V	NF	NF	V-V				
3 <sup>rd</sup>	128	2472.60	850	Horn	H	NF	NF	H-H				
4 <sup>th</sup>	128	3296.80	850	Horn	V	43.2	43.2	V-V	-51.0	-47.5	-13	-34.5
4 <sup>th</sup>	128	3296.80	850	Horn	H	43.1		H-H	-51.4			
The harmonics were investigated up to the 10 <sup>th</sup> harmonic. Emissions above the 4 <sup>th</sup> harmonic were in the noise floor (NF)												
<b>Middle Channel – 837.6 MHz</b>												
2 <sup>nd</sup>	195	1675.20	850	Horn	V	55.7	55.7	V-V	-47.3	-44.6	-13	-31.6
2 <sup>nd</sup>	195	1675.20	850	Horn	H	54.4		H-H	-47.7			
3 <sup>rd</sup>	195	2512.80	850	Horn	V	NF	NF	V-V				
3 <sup>rd</sup>	195	2512.80	850	Horn	H	NF	NF	H-H				
4 <sup>th</sup>	195	3350.40	850	Horn	V	44.4	45.0	V-V	-49.3	-45.7	-13	-32.7
4 <sup>th</sup>	195	3350.40	850	Horn	V	45.0		H-H	-49.2			
The harmonics were investigated up to the 10 <sup>th</sup> harmonic. Emissions above the 4 <sup>th</sup> harmonic were in the NF												

**Radiated Emissions Test Data Results cont'd**

Test distance is 3.0 metres

June 25, 2004

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit	Diff to Limit (dB)
<b>High Channel – 848.8 MHz</b>												
2 <sup>nd</sup>	251	1697.60	850	Horn	V	51.4	51.4	V-V	-52.9	-50.2	-13	-37.2
2 <sup>nd</sup>	251	1697.60	850	Horn	H	48.0		H-H	-53.1			
3 <sup>rd</sup>	251	2546.40	850	Horn	V	NF	NF	V-V				
3 <sup>rd</sup>	251	2546.40	850	Horn	H	NF	NF	H-H				
4 <sup>th</sup>	251	3395.20	850	Horn	V	46.3	46.3	V-V	-45.8	-42.3	-13	-29.3
4 <sup>th</sup>	251	3395.20	850	Horn	H	45.8		H-H	-46.3			
The harmonics were investigated up to the 10 <sup>th</sup> harmonic. Emissions above the 4 <sup>th</sup> harmonic were in the noise floor (NF)												

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

June 25, 2004

EUT				Rx Antenna		Spectrum Analyzer			Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Corrected Reading (dBuV)	Max (V,H) (dBuV)	Reading (dBm)	Corrected Reading (relative to dipole) (dBm)	Pol. Tx-Rx	Limit (dBm)	Diff to Limit (dB)
<b>GSM BAND</b>													
<b>RF Local Oscillator 1 (LO<sub>1</sub>)</b>													
<b><u>Low Channel</u></b>													
F0	128	1272.20	850	Horn	V	NF	NF				V-V	-13	
F0	128	1272.20	850	Horn	H	NF					H-H		
No Emissions could be seen.													
<b><u>High Channel</u></b>													
F0	251	1296.80	850	Horn	V	NF	NF				V-V	-13	
F0	251	1296.80	850	Horn	H	NF					H-H		
No Emissions could be seen.													
<b>RF LO<sub>2</sub></b>													
<b><u>Low Channel</u></b>													
F0	128	1738.20	850	Horn	V	NF	NF				V-V	-13	
F0	128	1738.20	850	Horn	H	NF					H-H		
No Emissions could be seen.													
<b><u>High Channel</u></b>													
F0	251	1787.40	850	Horn	V	NF	NF				V-V	-13	
F0	251	1787.40	850	Horn	H	NF					H-H		
No Emissions could be seen.													

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

The measurements were performed with the handheld in standalone upright position.

EUT				Rx Antenna		Spectrum Analyzer			Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Corrected Reading (dBuV)	Max (V,H)	Tracking Generator			Limit	Diff to Limit (dB)
									Reading (dBm)	Corrected Reading (relative to dipole)	Pol.		
<b>IF (LO)</b>													
IF LO Channel 195, (837.6 MHz)													
FO	195	896.00	850	HLP	V	52.1	51.56	51.56	-37.1	-21.65	VV	-13	-8.65
FO	195	896.00	850	HLP	H	47.8	47.26		-37.3		HH		

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

June 25, 2004

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method																																																																																																																																																																
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit	Diff to Limit (dB)																																																																																																																																																												
<p><b>GSM850 and Bluetooth transmitting in frequency hopping mode</b> Handheld Standalone, upright position</p> <p><b>Low Channel – 824.2 MHz</b></p> <table border="1"> <tr> <td>2<sup>nd</sup></td> <td>128</td> <td>1648.40</td> <td>850</td> <td>Horn</td> <td>V</td> <td>51.3</td> <td>51.3</td> <td>V-V</td> <td>-52.5</td> <td>-49.8</td> <td>-13</td> <td>-36.8</td> </tr> <tr> <td>2<sup>nd</sup></td> <td>128</td> <td>1648.40</td> <td>850</td> <td>Horn</td> <td>H</td> <td>47.8</td> <td></td> <td>H-H</td> <td>-53.2</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3<sup>rd</sup></td> <td>128</td> <td>2472.60</td> <td>850</td> <td>Horn</td> <td>V</td> <td>NF</td> <td>NF</td> <td>V-V</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3<sup>rd</sup></td> <td>128</td> <td>2472.60</td> <td>850</td> <td>Horn</td> <td>H</td> <td>NF</td> <td></td> <td>H-H</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4<sup>th</sup></td> <td>128</td> <td>3296.80</td> <td>850</td> <td>Horn</td> <td>V</td> <td>45.1</td> <td>46.2</td> <td>V-V</td> <td>-46.8</td> <td>-43.3</td> <td>-13</td> <td>-30.3</td> </tr> <tr> <td>4<sup>th</sup></td> <td>128</td> <td>3296.80</td> <td>850</td> <td>Horn</td> <td>H</td> <td>46.2</td> <td></td> <td>H-H</td> <td>-47.0</td> <td></td> <td></td> <td></td> </tr> </table> <p>The harmonics were investigated up to the 10<sup>th</sup> harmonic. Emissions above the 4<sup>th</sup> harmonic were in the noise floor (NF)</p> <p><b>Middle Channel – 837.6 MHz</b></p> <table border="1"> <tr> <td>2<sup>nd</sup></td> <td>195</td> <td>1675.20</td> <td>850</td> <td>Horn</td> <td>V</td> <td>56.3</td> <td>56.3</td> <td>V-V</td> <td>-46.4</td> <td>-43.7</td> <td>-13</td> <td>-30.7</td> </tr> <tr> <td>2<sup>nd</sup></td> <td>195</td> <td>1675.20</td> <td>850</td> <td>Horn</td> <td>H</td> <td>52.3</td> <td></td> <td>H-H</td> <td>-46.7</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3<sup>rd</sup></td> <td>195</td> <td>2512.80</td> <td>850</td> <td>Horn</td> <td>V</td> <td>NF</td> <td>NF</td> <td>V-V</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3<sup>rd</sup></td> <td>195</td> <td>2512.80</td> <td>850</td> <td>Horn</td> <td>H</td> <td>NF</td> <td></td> <td>H-H</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4<sup>th</sup></td> <td>195</td> <td>3350.40</td> <td>850</td> <td>Horn</td> <td>V</td> <td>42.3</td> <td>42.6</td> <td>V-V</td> <td>-52.3</td> <td>-48.8</td> <td>-13</td> <td>-35.8</td> </tr> <tr> <td>4<sup>th</sup></td> <td>195</td> <td>3350.40</td> <td>850</td> <td>Horn</td> <td>V</td> <td>42.6</td> <td></td> <td>H-H</td> <td>-53.1</td> <td></td> <td></td> <td></td> </tr> </table> <p>The harmonics were investigated up to the 10<sup>th</sup> harmonic. Emissions above the 4<sup>th</sup> harmonic were in the NF</p>													2 <sup>nd</sup>	128	1648.40	850	Horn	V	51.3	51.3	V-V	-52.5	-49.8	-13	-36.8	2 <sup>nd</sup>	128	1648.40	850	Horn	H	47.8		H-H	-53.2				3 <sup>rd</sup>	128	2472.60	850	Horn	V	NF	NF	V-V					3 <sup>rd</sup>	128	2472.60	850	Horn	H	NF		H-H					4 <sup>th</sup>	128	3296.80	850	Horn	V	45.1	46.2	V-V	-46.8	-43.3	-13	-30.3	4 <sup>th</sup>	128	3296.80	850	Horn	H	46.2		H-H	-47.0				2 <sup>nd</sup>	195	1675.20	850	Horn	V	56.3	56.3	V-V	-46.4	-43.7	-13	-30.7	2 <sup>nd</sup>	195	1675.20	850	Horn	H	52.3		H-H	-46.7				3 <sup>rd</sup>	195	2512.80	850	Horn	V	NF	NF	V-V					3 <sup>rd</sup>	195	2512.80	850	Horn	H	NF		H-H					4 <sup>th</sup>	195	3350.40	850	Horn	V	42.3	42.6	V-V	-52.3	-48.8	-13	-35.8	4 <sup>th</sup>	195	3350.40	850	Horn	V	42.6		H-H	-53.1			
2 <sup>nd</sup>	128	1648.40	850	Horn	V	51.3	51.3	V-V	-52.5	-49.8	-13	-36.8																																																																																																																																																												
2 <sup>nd</sup>	128	1648.40	850	Horn	H	47.8		H-H	-53.2																																																																																																																																																															
3 <sup>rd</sup>	128	2472.60	850	Horn	V	NF	NF	V-V																																																																																																																																																																
3 <sup>rd</sup>	128	2472.60	850	Horn	H	NF		H-H																																																																																																																																																																
4 <sup>th</sup>	128	3296.80	850	Horn	V	45.1	46.2	V-V	-46.8	-43.3	-13	-30.3																																																																																																																																																												
4 <sup>th</sup>	128	3296.80	850	Horn	H	46.2		H-H	-47.0																																																																																																																																																															
2 <sup>nd</sup>	195	1675.20	850	Horn	V	56.3	56.3	V-V	-46.4	-43.7	-13	-30.7																																																																																																																																																												
2 <sup>nd</sup>	195	1675.20	850	Horn	H	52.3		H-H	-46.7																																																																																																																																																															
3 <sup>rd</sup>	195	2512.80	850	Horn	V	NF	NF	V-V																																																																																																																																																																
3 <sup>rd</sup>	195	2512.80	850	Horn	H	NF		H-H																																																																																																																																																																
4 <sup>th</sup>	195	3350.40	850	Horn	V	42.3	42.6	V-V	-52.3	-48.8	-13	-35.8																																																																																																																																																												
4 <sup>th</sup>	195	3350.40	850	Horn	V	42.6		H-H	-53.1																																																																																																																																																															



Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

June 25, 2004

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit	Diff to Limit (dB)
<b>High Channel – 848.8 MHz</b>												
2 <sup>nd</sup>	251	1697.60	850	Horn	V	49.2	49.2	V-V	-55.4	-52.5	-13	-39.5
2 <sup>nd</sup>	251	1697.60	850	Horn	H	47.8		H-H	-55.2			
3 <sup>rd</sup>	251	2546.40	850	Horn	V	NF	NF	V-V				
3 <sup>rd</sup>	251	2546.40	850	Horn	H	NF		H-H				
4 <sup>th</sup>	251	3395.20	850	Horn	V	44.7	44.7	V-V	-48.2	-44.7	-13	-31.7
4 <sup>th</sup>	251	3395.20	850	Horn	H	44.0		H-H	-49.0			
<p>The harmonics were investigated up to the 10<sup>th</sup> harmonic.  Emissions above the 4<sup>th</sup> harmonic were in the noise floor (NF)</p>												

Radiated Emissions Test Data Results Cont'd

Test Distance was 3.0 metres.

PCS Band

June 25, 2004

								Substitution Method						
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) dBuV	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator) (dBm)	Pol. Tx-Rx	Limit (dBm)	Diff to Limit (dB)		
<b>PCS BAND (EIRP)</b>														
Handheld Standalone														
F0	512	1850.20	1900	Horn	V	94.4	94.4	-5.9	29.9	V-V	33	-3.1		
F0	512	1850.20	1900	Horn	H	83.3		-4.8		H-H				
F0	661	1880.00	1900	Horn	V	95.3	95.3	-3.8	31.9	V-V	33	-1.1		
F0	661	1880.00	1900	Horn	H	85.8		-2.8		H-H				
F0	810	1909.80	1900	Horn	V	95.0	95.0	-4.4	31.2	V-V	33	-1.8		
F0	810	1909.80	1900	Horn	H	87.1		-3.5		H-H				

Radiated Emissions Test Data Results Cont'd

Test Distance was 3.0 metres.

PCS Band

June 25, 2004

								Substitution Method				
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Pol. Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Reading (dBm)	Corrected Reading (relative to dipole) (dBm)	Pol Tx-Rx	Limit (dBm)	Diff to Limit (dB)
<b>PCS BAND (Harmonics)</b>												
Handheld Standalone, upright position												
<b>Low Channel 1850.20 MHz</b>												
2 <sup>nd</sup>	512	3700.40	1900	Horn	V	43.3	43.3	-44.8	-41.3	V-V	-13	-28.3
2 <sup>nd</sup>	512	3700.40	1900	Horn	H	41.0		-44.6		H-H		
The harmonics were investigated up to the 10th harmonic. Emissions above the 2 <sup>nd</sup> harmonic were in the NF												
<b>Middle Channel 1880.00 MHz</b>												
2 <sup>nd</sup>	661	3760.00	1900	Horn	V	42.6	42.6	-44.5	-40.6	V-V	-13	-27.6
2 <sup>nd</sup>	661	3760.00	1900	Horn	H	40.6		-43.9		H-H		
The harmonics were investigated up to the 10th harmonic. Emissions above the 2 <sup>nd</sup> harmonic were in the NF												
<b>High Channel 1909.8 MHz</b>												
2 <sup>nd</sup>	810	3819.60	1900	Horn	V	45.1	45.1	-41.6	-38.3	V-V	-13	-25.3
2 <sup>nd</sup>	810	3819.60	1900	Horn	H	43.8		-42.0		H-H		
The harmonics were investigated up to the 10th harmonic. Emissions above the 2 <sup>nd</sup> harmonic were in the NF												

**Radiated Emissions Test Results Cont'd**

Test Distance was 3.0 metres.

PCS Band

June 25, 2004

The measurements were performed in transmit mode with the handheld in standalone upright position.

EUT				Rx Antenna		Spectrum Analyzer			Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Corrected Reading (dBuV)	Max (V,H) (dBuV)	Reading (dBm)	Corrected Reading (relative to dipole) (dBm)	Pol. Tx-Rx	Limit (dBm)	Diff to Limit (dB)
<b>RF LO<sub>1</sub></b>													
<b><u>Low Channel</u></b>													
F0	512	1423.20	1900	Horn	V	NF	NF				V-V	-13	
F0	512	1423.20	1900	Horn	H	NF					H-H		
No Emissions could be seen.													
<b><u>High Channel</u></b>													
F0	810	1482.80	1900	Horn	V	NF	NF				V-V	-13	
F0	810	1482.80	1900	Horn	H	NF					H-H		
No Emissions could be seen.													
<b>RF LO<sub>2</sub></b>													
<b><u>Low Channel</u></b>													
F0	512	1930.10	1900	Horn	V	NF	NF				V-V	-13	
F0	512	1930.10	1900	Horn	H	NF					H-H		
No Emissions could be seen.													
<b><u>High Channel</u></b>													
F0	810	1989.70	1900	Horn	V	NF	NF				V-V	-13	
F0	810	1989.70	1900	Horn	H	NF					H-H		
No Emissions could be seen.													

Radiated Emissions Test Results Cont'd

Test Distance was 3.0 metres.

PCS Band

June 25, 2004

The measurements were performed in transmit mode with the handheld in standalone upright position.


EUT				Rx Antenna		Spectrum Analyzer			Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Corrected Reading (dBuV)	Max (V,H) (dBuV)	Reading (dBm)	Corrected Reading (relative to dipole) (dBm)	Pol. Tx-Rx	Limit (dBm)	Diff to Limit (dB)
<b>IF (LO)</b>													
F0	661	854.00	1900	HLP	V	NF	NF				V-V	-13	
F0	661	854.00	1900	HLP	H	NF					H-H		
No Emissions could be seen.													

**Radiated Emissions Test Results Cont'd**

Test Distance was 3.0 metres.

June 25, 2004

EUT								Substitution Method				
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Pol. Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Reading (dBm)	Corrected Reading (relative to dipole) (dBm)	Pol Tx-Rx	Limit (dBm)	Diff to Limit (dB)
<b>PCS and Bluetooth transmitting in frequency hopping mode</b>												
Handheld Standalone, upright position												
<b>Low Channel 1850.20 MHz</b>												
2 <sup>nd</sup>	512	3700.40	1900	Horn	V	42.2	42.4	-45.8	-42.5	V-V	-13	-29.5
2 <sup>nd</sup>	512	3700.40	1900	Horn	H	42.4		-46.1		H-H		
3 <sup>rd</sup>	512	5550.6	1900	Horn	V	42.5	42.5	-37.1	-34.9	V-V	-13	-21.9
3 <sup>rd</sup>	512	5550.6	1900	Horn	H	NF	NF	-36.3		H-H		
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 <sup>rd</sup> harmonic were in the NF												
<b>Middle Channel 1880.00 MHz</b>												
2 <sup>nd</sup>	661	3760.00	1900	Horn	V	41.5	41.5	-46.4	-42.5	V-V	-13	-29.5
2 <sup>nd</sup>	661	3760.00	1900	Horn	H	40.9		-45.8		H-H		
3 <sup>rd</sup>	661	5640.00	1900	Horn	V	46.0	46.0	-32.1	-29.2	V-V	-13	-16.2
3 <sup>rd</sup>	661	5640.00	1900	Horn	H	42.3		-30.6		H-H		
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 <sup>rd</sup> harmonic were in the NF												
<b>High Channel 1909.8 MHz</b>												
2 <sup>nd</sup>	810	3819.60	1900	Horn	V	43.4	43.4	-44.4	-41.1	V-V	-13	-28.1
2 <sup>nd</sup>	810	3819.60	1900	Horn	H	42.6		-44.8		H-H		
3 <sup>rd</sup>	810	5729.40	1900	Horn	V	42.1	42.1	-36.5	-34.2	V-V	-13	-21.2
3 <sup>rd</sup>	810	5729.40	1900	Horn	H	NF	NF	-35.6		H-H		
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 <sup>rd</sup> harmonic were in the NF												

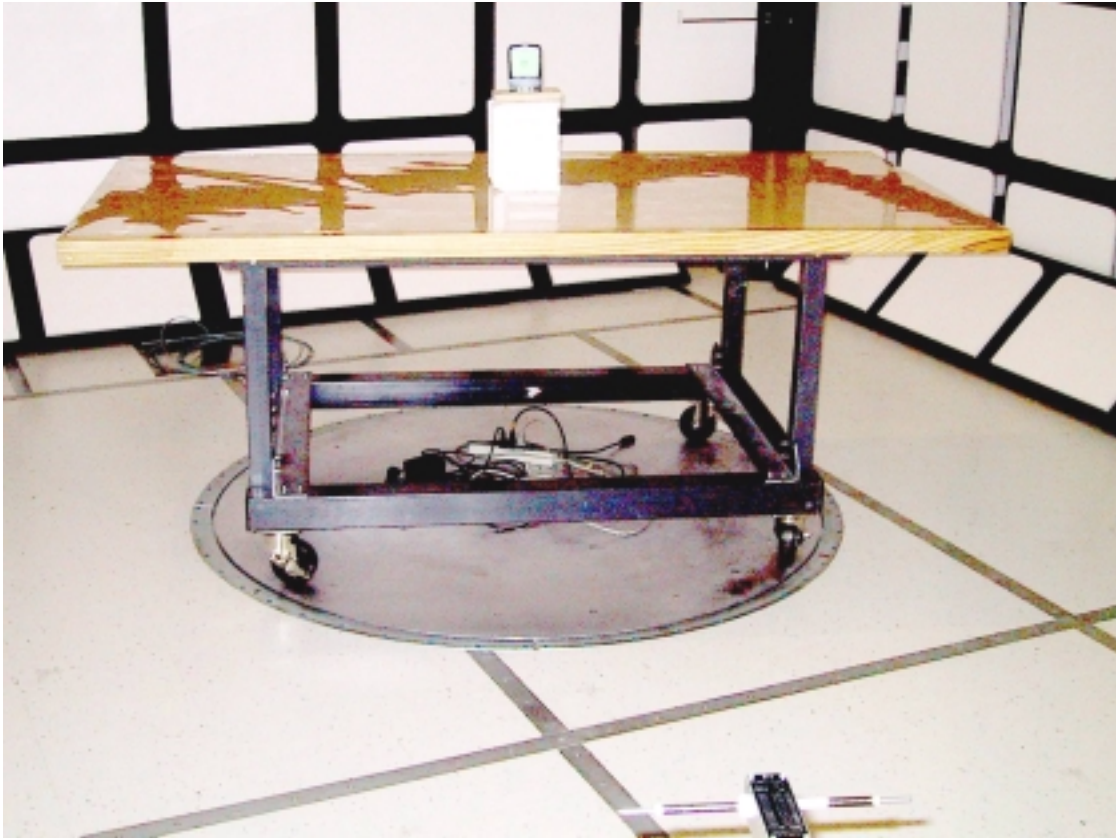Radiated Emissions Test Photo Cont'd**Radiated Emissions at 3.0 metres**