
 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		1(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR THE ACCURACY VERIFICATION

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		2(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 06/29/04 11:47:31

Test Laboratory: Research In Motion Limited

835 MHz dipole validation; Amb. Temp. 24.0 deg. cel.; Liquid Temp. 23.2 deg. cel.

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 MHz Head Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 112.0 V/m; Power Drift = -0.006 dB
Maximum value of SAR (measured) = 10.7 mW/g
Peak SAR (extrapolated) = 14.2 W/kg
SAR(1 g) = 9.81 mW/g; SAR(10 g) = 6.43 mW/g

Unnamed procedure/Area Scan (51x151x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 112.0 V/m; Power Drift = -0.006 dB
Maximum value of SAR (interpolated) = 10.7 mW/g

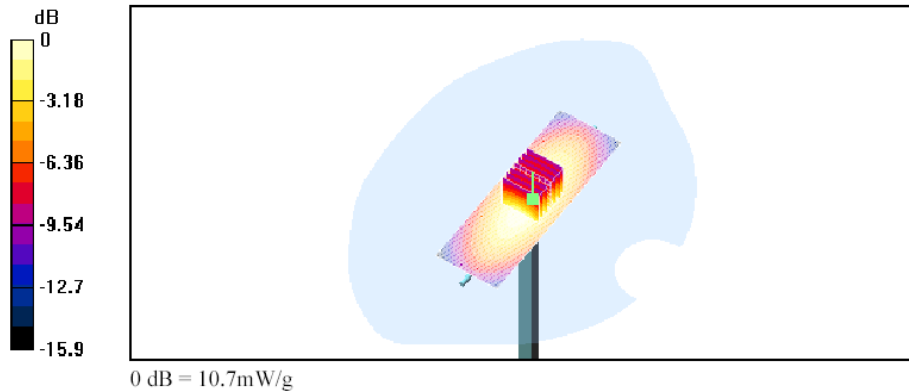

file://C:\Program%20Files\DASY4\Print_Templates\835%20MHz%20dipole%20validati... 29/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		3(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 06/30/04 08:10:51

Test Laboratory: Research In Motion Limited

835 MHz dipole validation; Amb. Temp. 24.7deg. cel.; Liquid Temp. 23.5 deg. cel.

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 MHz Head Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 112.4 V/m; Power Drift = -0.004 dB
Maximum value of SAR (measured) = 10.8 mW/g
Peak SAR (extrapolated) = 14.3 W/kg
SAR(1 g) = 9.92 mW/g; SAR(10 g) = 6.51 mW/g

Unnamed procedure/Area Scan (51x151x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 112.4 V/m; Power Drift = -0.004 dB
Maximum value of SAR (interpolated) = 10.8 mW/g

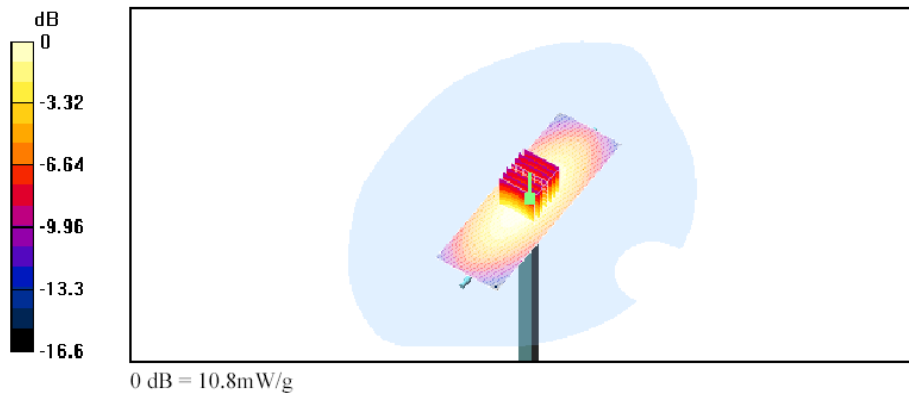

file://C:\Program%20Files\DASY4\Print_Templates\835%20MHz%20dipole%20validati... 30/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		4(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 07/05/04 11:38:03

Test Laboratory: Research In Motion Limited

Dipole validation 1900 MHz; Ambient temp. 24.2 deg. cel. ; Liquid temp. 22.4 deg. cel

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 189.3 V/m; Power Drift = 0.0 dB
Maximum value of SAR (measured) = 47.9 mW/g
Peak SAR (extrapolated) = 74.3 W/kg
SAR(1 g) = 42.1 mW/g; SAR(10 g) = 22 mW/g

Unnamed procedure/Area Scan (51x101x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 189.3 V/m; Power Drift = 0.0 dB
Maximum value of SAR (interpolated) = 48.7 mW/g

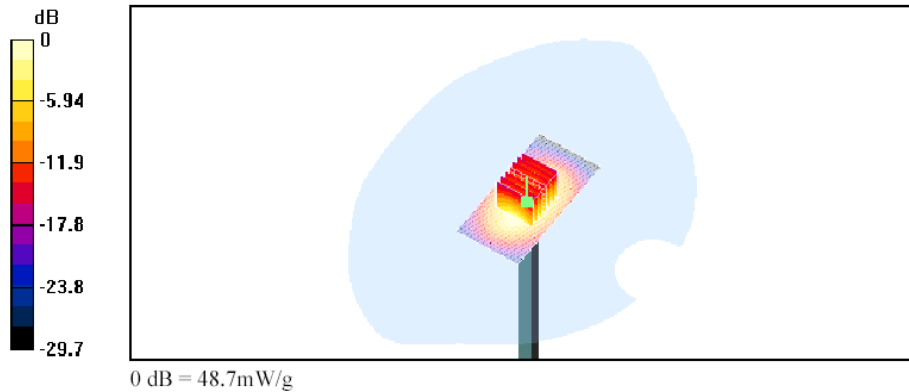

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20validation%201900%20... 05/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		5(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 07/06/04 15:00:39

Test Laboratory: Research In Motion Limited

Dipole validation 1900 MHz; Ambient temp. 23.7 deg. cel. ; Liquid temp. 22.6 deg. cel

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 189.2 V/m; Power Drift = -0.007 dB
Maximum value of SAR (measured) = 47.9 mW/g
Peak SAR (extrapolated) = 73.8 W/kg
SAR(1 g) = 42.5 mW/g; SAR(10 g) = 22.4 mW/g

Unnamed procedure/Area Scan (51x101x1): Measurement grid: dx=10mm, dy=10mm


Reference Value = 189.2 V/m; Power Drift = -0.007 dB
Maximum value of SAR (interpolated) = 49 mW/g

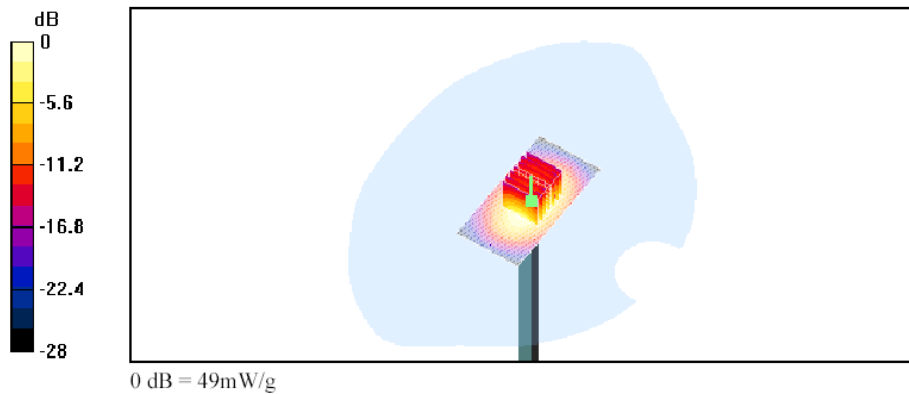

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20validation%201900%20... 06/07/2004

 RESEARCH IN MOTION	Document Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		Page 6(31)
	Author Data Daoud Attayi	Dates of Test June 29 – July 07, 2004	Test Report No RIM-0094-0407-03

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		7(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 06/29/04 15:49:38

Test Laboratory: Research In Motion Limited

Touch left; GSM 850 band; Mid Chan; BAT-06860-001 (CS-1) battery; Amb. Temp. 23.2 deg. cel.; Liquid Temp. 22.6 deg. cel.

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
Medium: 835 MHz Head Medium parameters used: $f = 836.8 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.1 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.831 mW/g
Peak SAR (extrapolated) = 0.996 W/kg
SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.575 mW/g

Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 10.1 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.848 mW/g

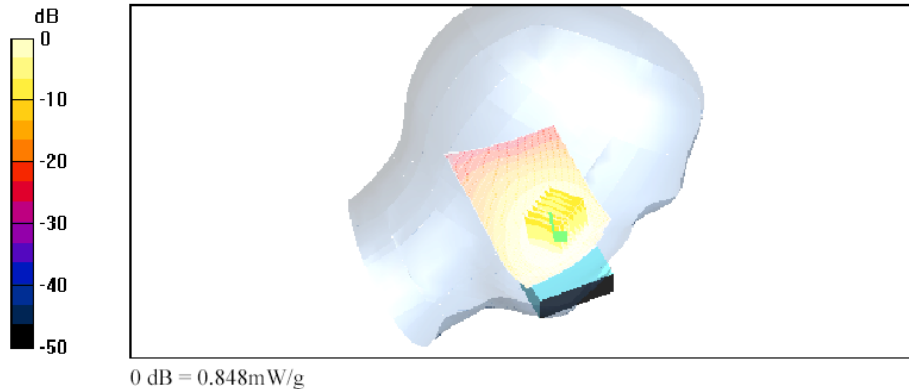

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20left;%20GSM%20850%2... 29/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		8(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 06/30/04 08:47:18

Test Laboratory: Research In Motion Limited

Tilted left; GSM 850 band; Mid Chan; BAT-06860-001 (CS-1) battery; Amb. Temp. 23.9 deg. cel.; Liquid Temp. 22.7 deg. cel.

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
Medium: 835 MHz Head Medium parameters used: $f = 836.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 43.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.4 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.499 mW/g
Peak SAR (extrapolated) = 0.575 W/kg
SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.355 mW/g

Unnamed procedure/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.4 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.509 mW/g

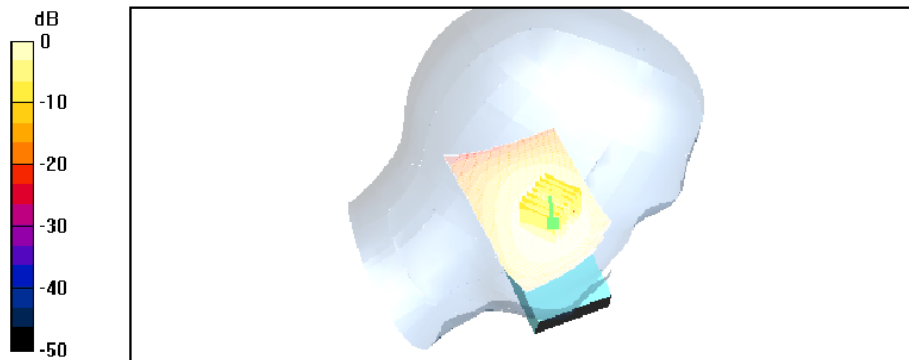

file://C:\Program%20Files\DASY4\Print_Templates\Tilted%20left;%20GSM%20850%2... 30/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		9(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 06/29/04 12:04:02

Test Laboratory: Research In Motion Limited

Touch right; GSM 850 band; Mid Chan; BAT-06860-001 (CS-1) battery; Amb. Temp. 23.9 deg. cel.; Liquid Temp. 23.0 deg. cel.

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample;

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
Medium: 835 MHz Head Medium parameters used: $f = 836.8 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.3 V/m; Power Drift = -0.2 dB
Maximum value of SAR (measured) = 0.905 mW/g
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.857 mW/g; SAR(10 g) = 0.629 mW/g

Unnamed procedure/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.3 V/m; Power Drift = -0.2 dB
Maximum value of SAR (interpolated) = 0.925 mW/g

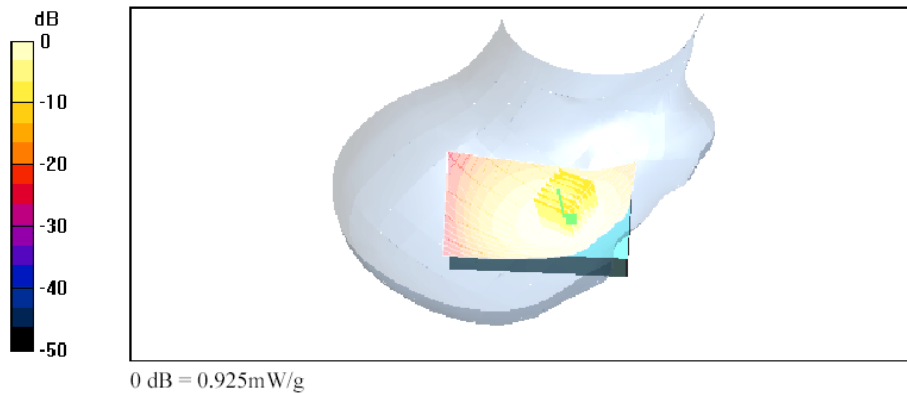

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20GSM%20850%... 29/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		10(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 06/29/04 12:53:59

Test Laboratory: Research In Motion Limited

Tilted right; GSM 850 band; Mid Chan; BAT-06860-001 (CS-1) battery; Amb. Temp. 23.8 deg. cel.; Liquid Temp. 23.1 deg. cel.

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
Medium: 835 MHz Head Medium parameters used: $f = 836.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 43.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.8 V/m; Power Drift = 0.0 dB
Maximum value of SAR (measured) = 0.444 mW/g
Peak SAR (extrapolated) = 0.518 W/kg
SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.316 mW/g

Unnamed procedure/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.8 V/m; Power Drift = 0.0 dB
Maximum value of SAR (interpolated) = 0.441 mW/g

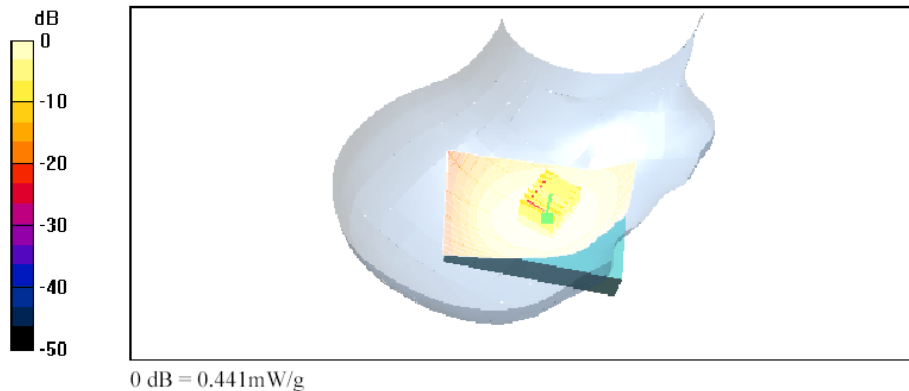

file://C:\Program%20Files\DASY4\Print_Templates\Tilted%20right;%20GSM%20850%... 29/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		11(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 06/29/04 13:39:29

Test Laboratory: Research In Motion Limited

Touch right; GSM 850 band; Mid Chan; BAT-06860-001 (CS-2) battery; Amb. Temp. 23.8 deg. cel.; Liquid Temp. 23.0 deg. cel.

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
Medium: 835 MHz Head Medium parameters used: $f = 836.8 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 12.6 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.855 mW/g
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.595 mW/g

Unnamed procedure/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.6 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.876 mW/g

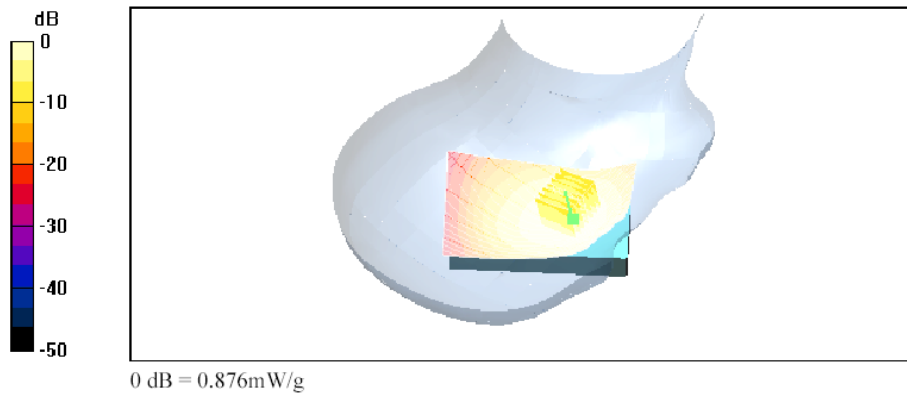

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20GSM%20850%... 29/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		12(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 06/29/04 14:16:19

Test Laboratory: Research In Motion Limited

Touch right; GSM 850 band; Mid Chan; BAT-06685-001 (CH-1) higher capacity battery; Amb. Temp. 23.6 deg. cel.; Liquid Temp. 22.9 deg. cel.

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
Medium: 835 MHz Head Medium parameters used: $f = 836.8 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.5 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.854 mW/g
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.810 mW/g; SAR(10 g) = 0.591 mW/g


Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 11.5 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.866 mW/g

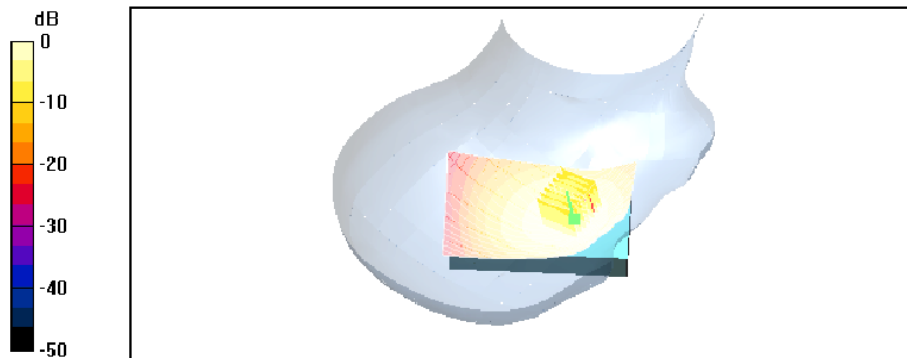

0 dB = 0.866mW/g

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20GSM%20850%... 29/06/2004

	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		13(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 06/29/04 15:04:16

Test Laboratory: Research In Motion Limited

Touch right; GSM 850 band; Mid Chan; BAT-06860-001 (CS-1) battery and Bluetooth ON; Amb. Temp. 23.2 deg. cel.; Liquid Temp. 22.6 deg. cel.

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
 Medium: 835 MHz Head Medium parameters used: $f = 836.8 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.3 V/m; Power Drift = -0.1 dB
 Maximum value of SAR (measured) = 0.893 mW/g
 Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.845 mW/g; SAR(10 g) = 0.622 mW/g

Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 14.3 V/m; Power Drift = -0.1 dB
 Maximum value of SAR (interpolated) = 0.903 mW/g

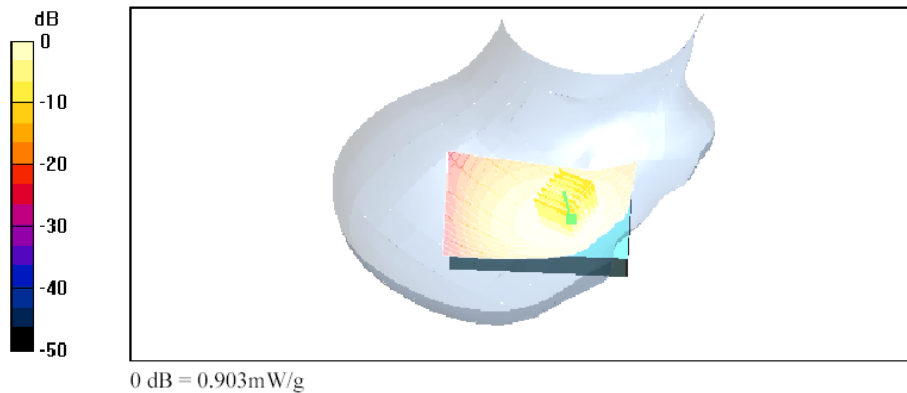

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20GSM%20850%... 29/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		14(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 07/06/04 09:25:25

Test Laboratory: Research In Motion Limited

Touch left; Mid Chan; GSM 1900 band; BAT-06685-001 (CH-1) battery; Ambient temp. 25.0 deg. cel. ; Liquid temp. 23.2 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm


Reference Value = 10.4 V/m; Power Drift = -0.2 dB
Maximum value of SAR (interpolated) = 0.733 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.2 dB
Maximum value of SAR (measured) = 0.717 mW/g
Peak SAR (extrapolated) = 0.985 W/kg
SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.396 mW/g

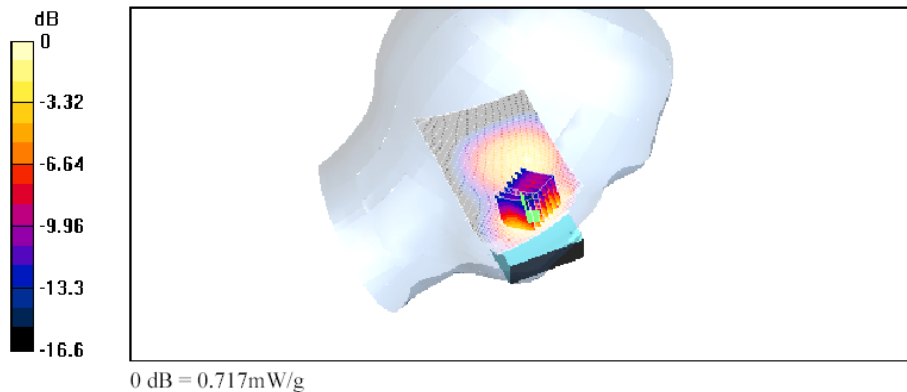

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20left;%20Mid%20Chan;%... 06/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		15(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 07/06/04 11:41:27

Test Laboratory: Research In Motion Limited

Tilted left; Mid Chan; GSM 1900 band; BAT-06685-001 (CH-1) battery; Ambient temp. 24.9 deg. cel. ; Liquid temp. 23.2 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm
Reference Value = 16.3 V/m; Power Drift = -0.0 dB
Maximum value of SAR (interpolated) = 0.519 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.3 V/m; Power Drift = -0.0 dB
Maximum value of SAR (measured) = 0.515 mW/g
Peak SAR (extrapolated) = 0.686 W/kg
SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.292 mW/g

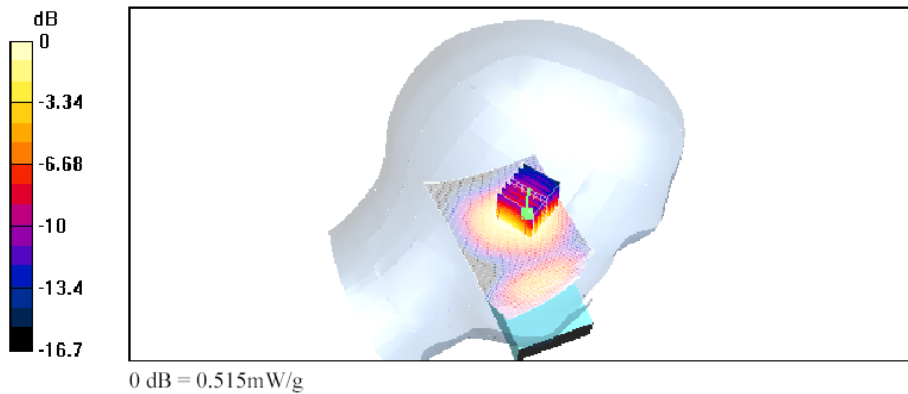

file://C:\Program%20Files\DASY4\Print_Templates\Tilted%20left;%20Mid%20Chan;%... 06/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		16(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 07/05/04 12:14:44

Test Laboratory: Research In Motion Limited

Touch right; Mid Chan; GSM 1900 band; BAT-06860-001 (CS-1) battery; Ambient temp. 25.2 deg. cel. ; Liquid temp. 22.6 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Reference Value = 13.3 V/m; Power Drift = -0.0 dB
Maximum value of SAR (interpolated) = 0.628 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.3 V/m; Power Drift = -0.0 dB
Maximum value of SAR (measured) = 0.624 mW/g
Peak SAR (extrapolated) = 0.840 W/kg
SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.339 mW/g

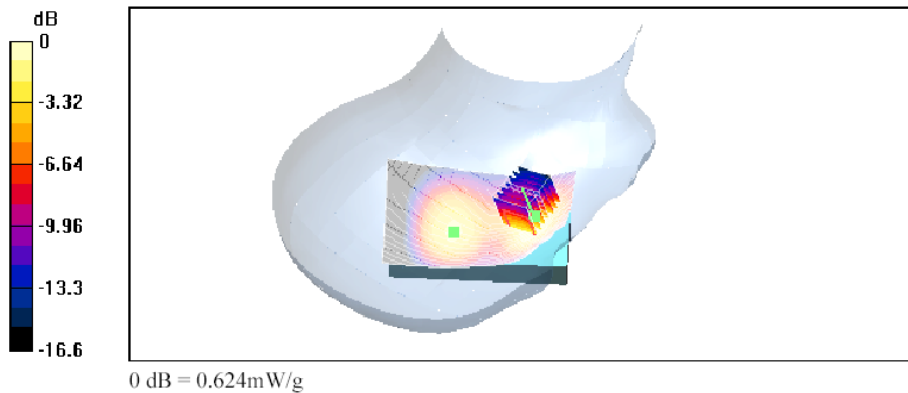

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20Chan:... 05/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		17(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 07/05/04 16:16:48

Test Laboratory: Research In Motion Limited

Tilted right; Mid Chan; GSM 1900 band; BAT-06685-001 (CH-1) battery; Ambient temp. 24.9 deg. cel. ; Liquid temp. 22.7 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Reference Value = 14.9 V/m; Power Drift = 0.0 dB
Maximum value of SAR (interpolated) = 0.306 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.9 V/m; Power Drift = 0.0 dB
Maximum value of SAR (measured) = 3.92 mW/g
Peak SAR (extrapolated) = 3.92 W/kg
SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.176 mW/g

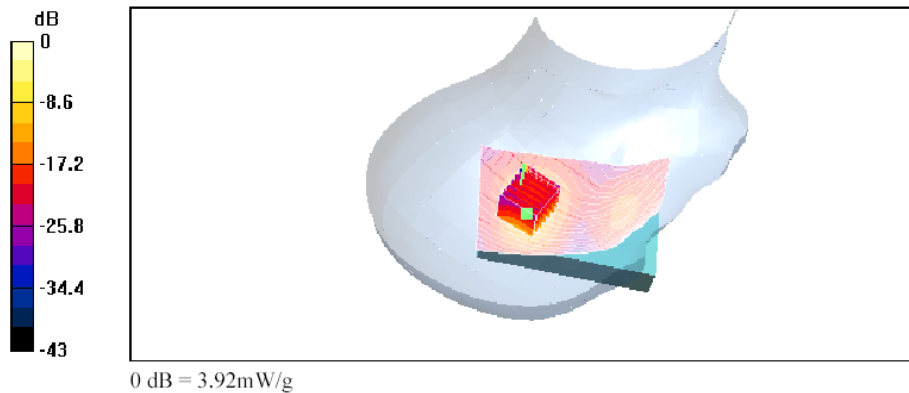

file://C:\Program%20Files\DASY4\Print_Templates\Tilted%20right;%20Mid%20Chan;... 05/07/2004

	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		18(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 07/05/04 13:40:56

Test Laboratory: Research In Motion Limited

Touch right; Mid Chan; GSM 1900 band; BAT-06860-001 (CS-2) battery; Ambient temp. 25.3 deg. cel. ; Liquid temp. 22.7 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
 Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Reference Value = 13.2 V/m; Power Drift = -0.0 dB
 Maximum value of SAR (interpolated) = 0.616 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.2 V/m; Power Drift = -0.0 dB
 Maximum value of SAR (measured) = 0.610 mW/g
 Peak SAR (extrapolated) = 0.834 W/kg
SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.333 mW/g

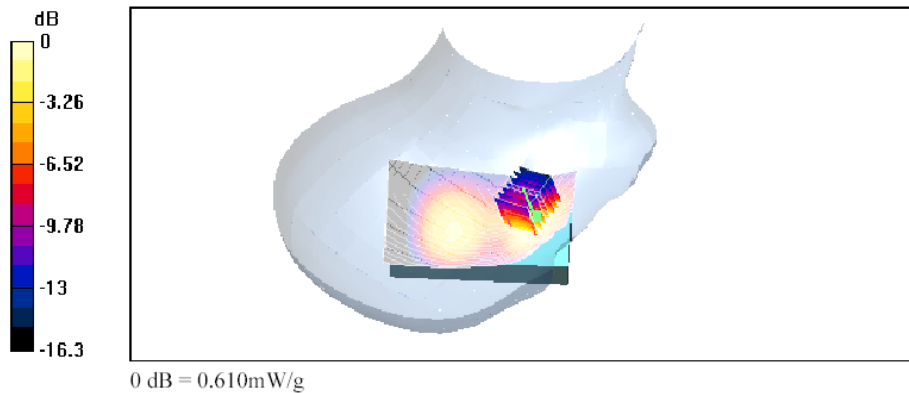

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20Chan:... 05/07/2004

	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		19(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 07/05/04 14:27:12

Test Laboratory: Research In Motion Limited

Touch right; Mid Chan; GSM 1900 band; BAT-06685-001 (CH-1) battery; Ambient temp. 25.1 deg. cel. ; Liquid temp. 22.5 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
 Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Reference Value = 14 V/m; Power Drift = -0.0 dB
 Maximum value of SAR (interpolated) = 0.696 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14 V/m; Power Drift = -0.0 dB
 Maximum value of SAR (measured) = 0.705 mW/g
 Peak SAR (extrapolated) = 0.920 W/kg
SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.381 mW/g

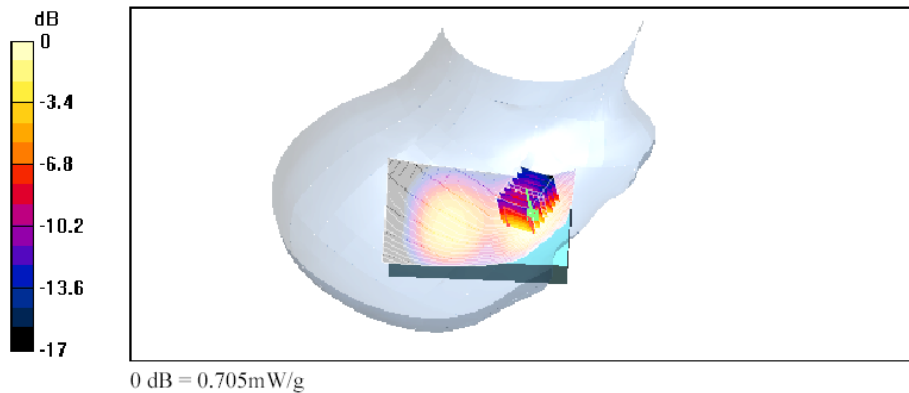

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20Chan:... 05/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		20(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 07/05/04 15:38:30

Test Laboratory: Research In Motion Limited

Touch right; Mid Chan; GSM 1900 band; BAT-06685-001 (CH-1) battery and Bluetooth ON; Ambient temp. 25.0 deg. cel. ; Liquid temp. 22.8 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(5.2, 5.2, 5.2); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112



Unnamed procedure/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Reference Value = 14.1 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.690 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.1 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.700 mW/g
Peak SAR (extrapolated) = 0.921 W/kg
SAR(1 g) = 0.634 mW/g; SAR(10 g) = 0.381 mW/g

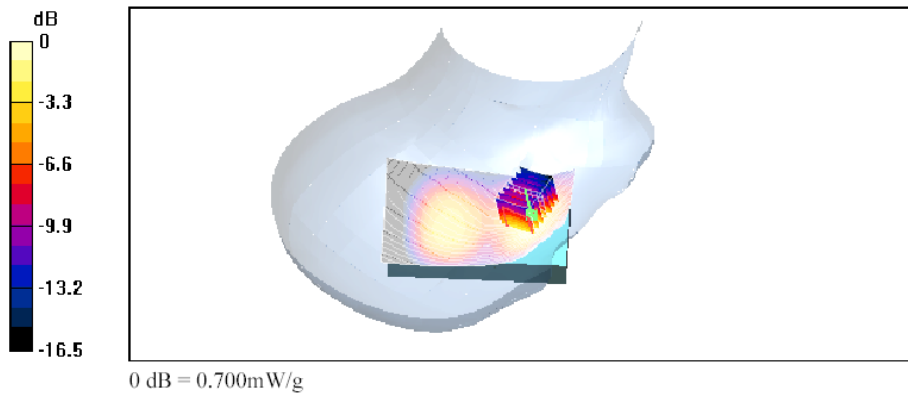


file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20Chan:... 05/07/2004

Z-axis plots for worst-case configuration:

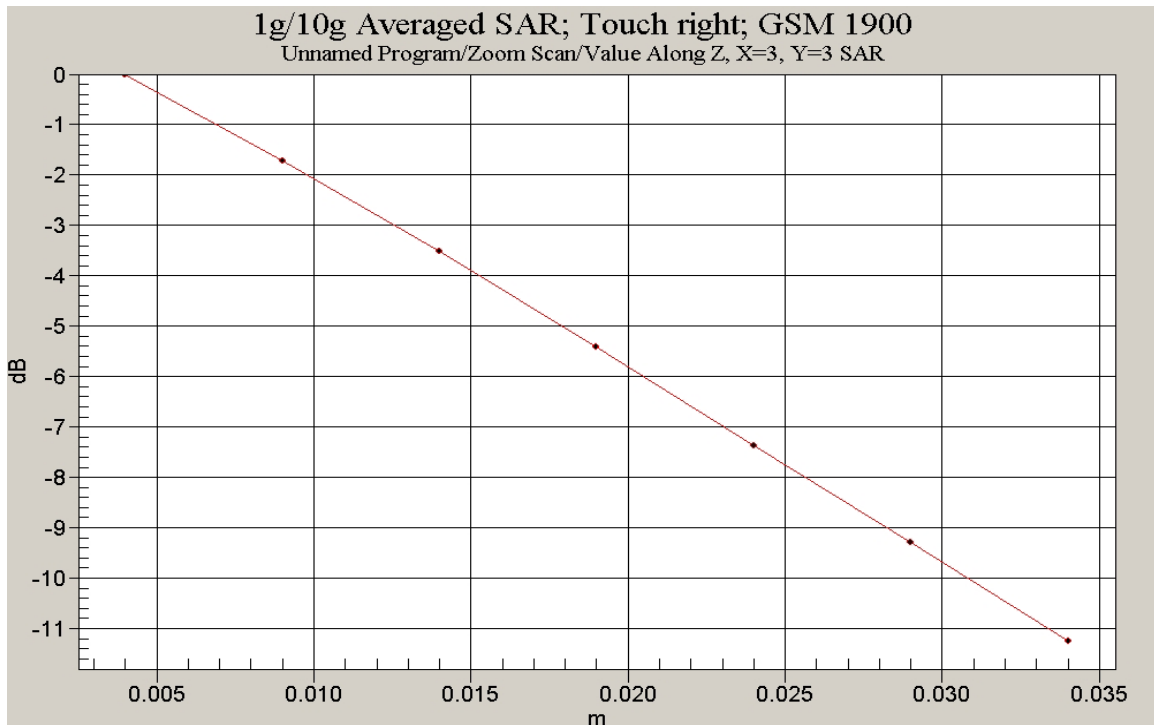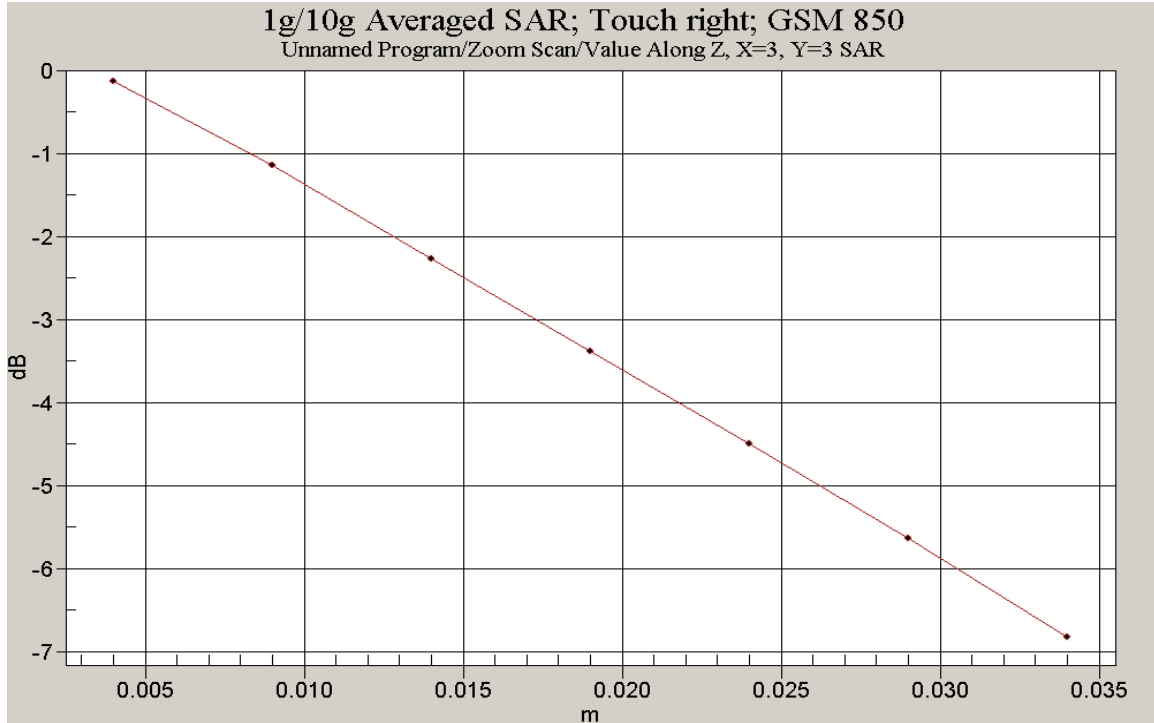

 RESEARCH IN MOTION	Document Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		Page 22(31)
	Author Data Daoud Attayi	Dates of Test June 29 – July 07, 2004	Test Report No RIM-0094-0407-03

APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		23(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 06/30/04 11:02:33

Test Laboratory: Research In Motion Limited

**Body-worn with holster; GSM 850 band; Low Chan; BAT-06860-001 (CS-1) battery;
Amb. Temp. 23.5 deg. cel.; Liquid Temp. 22.3 deg. cel**

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 824 MHz; Duty Cycle: 1:8.3
Medium: M 835 Medium parameters used (extrapolated): $f = 824 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 30 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 1.05 mW/g
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.987 mW/g; SAR(10 g) = 0.710 mW/g

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 30 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 1.08 mW/g

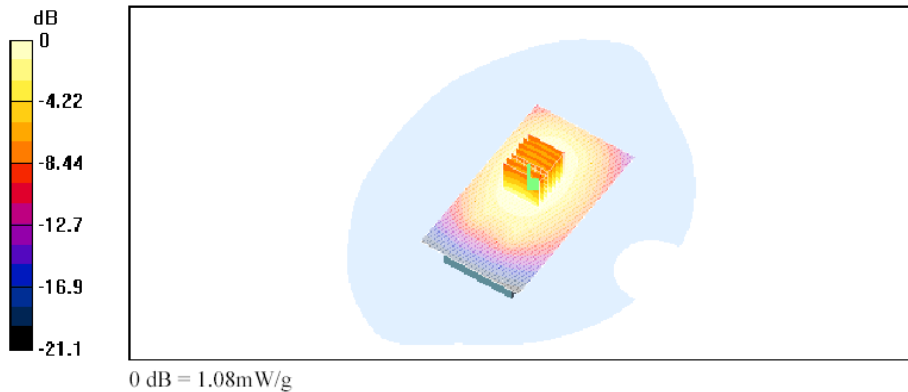

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20holster;%2... 30/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		24(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 06/30/04 12:19:06

Test Laboratory: Research In Motion Limited

**Body-worn with holster; GSM 850 band; Low Chan; BAT-06860-001 (CS-2) battery;
Amb. Temp. 23.3 deg. cel.; Liquid Temp. 22.4 deg. cel**

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium: M 835 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.4 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 1.09 mW/g
Peak SAR (extrapolated) = 1.4 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.744 mW/g


Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 30.4 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 1.12 mW/g

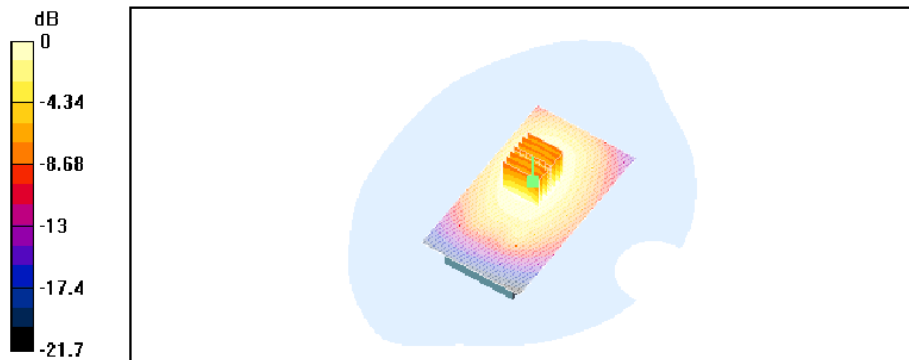

0 dB = 1.12mW/g

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20holster;%2... 30/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		25(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 06/30/04 13:10:31

Test Laboratory: Research In Motion Limited

**Body-worn with holster; GSM 850 band; Low Chan; BAT-06685-001 (CH-1) battery;
Amb. Temp. 23.1 deg. cel.; Liquid Temp. 22.3 deg. cel**

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium: M 835 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 28.4 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.984 mW/g
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.661 mW/g

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 28.4 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.995 mW/g

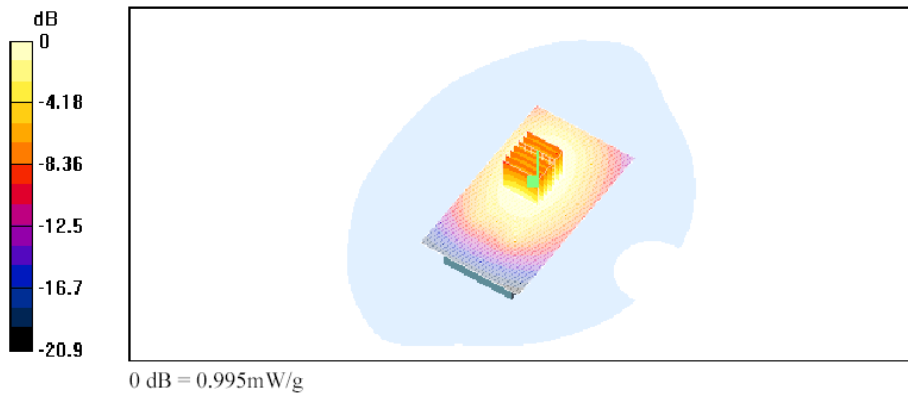

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20holster;%2... 30/06/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		26(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 06/30/04 13:58:31

Test Laboratory: Research In Motion Limited

Body-worn with holster; GSM 850 band; Low Chan; BAT-06860-001 (CS-2) battery; with Bluetooth ON and headset; Amb. Temp. 23.0 deg. cel.; Liquid Temp. 22.2 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium: M 835 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 23/10/2002
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.2 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.929 mW/g
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.871 mW/g; SAR(10 g) = 0.631 mW/g


Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 28.2 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.946 mW/g

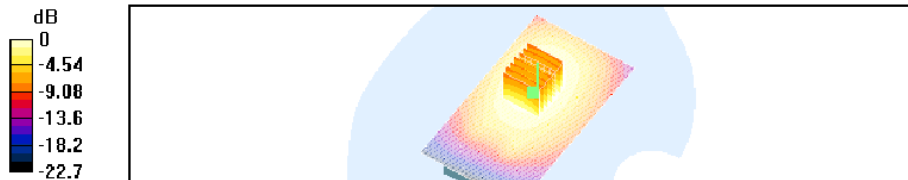

0 dB = 0.946mW/g

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20holster;%2... 27/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		27(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 07/06/04 16:33:12

Test Laboratory: Research In Motion Limited

**Body worn with holster; Mid Chan; GSM 1900 band; BAT-06860-001 (CS-1) battery;
Ambient temp. 23.5 deg. cel. ; Liquid temp. 22.0 deg. cel**

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: M1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.8, 4.8, 4.8); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 16.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.677 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=5mm

Reference Value = 16.1 V/m; Power Drift = -0.1 dB


Maximum value of SAR (measured) = 0.644 mW/g

Peak SAR (extrapolated) = 0.866 W/kg

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.375 mW/g

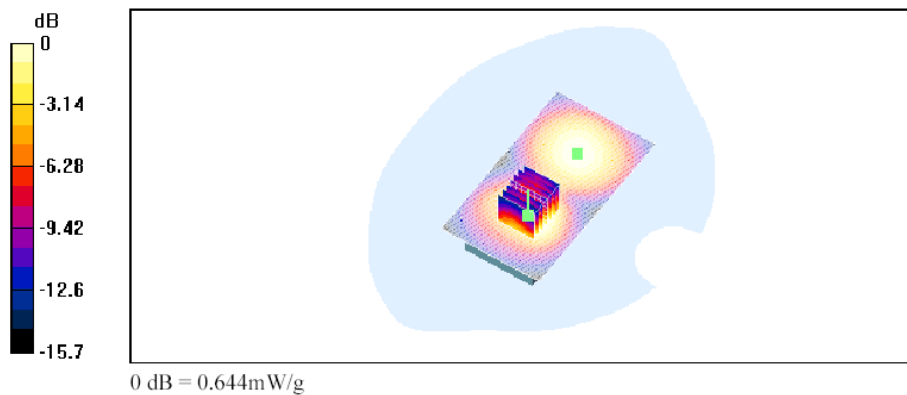

file://C:\Program%20Files\DASY4\Print_Templates\Body%20worn%20with%20holster;... 07/07/2004

	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		28(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Page 1 of 1

Date/Time: 07/06/04 17:22:09

Test Laboratory: Research In Motion Limited

Body worn with holster; Mid Chan; GSM 1900 band; BAT-06860-001 (CS-1) Sanyo GS battery; Ambient temp. 23.9 deg. cel. ; Liquid temp. 22.2 deg. cel

DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: M1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.8, 4.8, 4.8); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 13.6 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.662 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.0 dB


Maximum value of SAR (measured) = 0.653 mW/g

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.377 mW/g

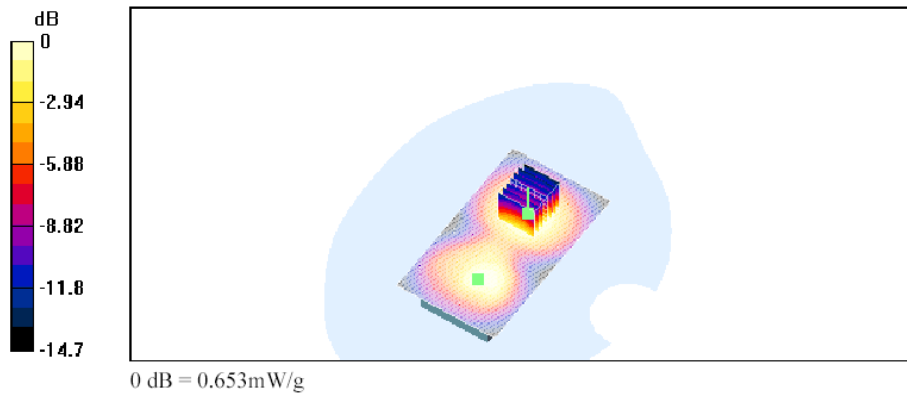

file://C:\Program%20Files\DASY4\Print_Templates\Body%20worn%20with%20holster;... 07/07/2004

	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		29(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 07/07/04 11:15:28

Test Laboratory: Research In Motion Limited

Body worn with holster; Mid Chan; GSM 1900 band; BAT-06685-001 (CH-1) higher cap battery; Ambient temp. 23.0 deg. cel. ; Liquid temp. 22.1 deg. cel


DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: M1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 50.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:
- Probe: ET3DV6 - SN1643; ConvF(4.8, 4.8, 4.8); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Reference Value = 14.5 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.512 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.5 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.513 mW/g
Peak SAR (extrapolated) = 0.723 W/kg
SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.303 mW/g

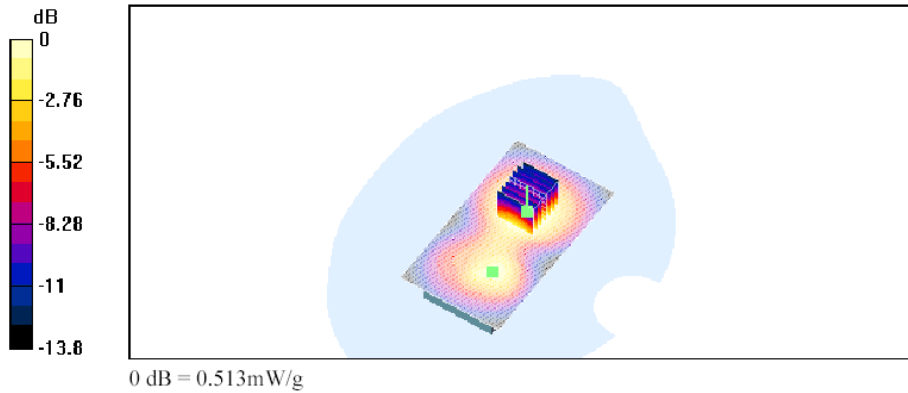

file://C:\Program%20Files\DASY4\Print_Templates\Body%20worn%20with%20holster;... 07/07/2004

	Document		Page
	Appendices for the BlackBerry 7100t Wireless Handheld Model No. RAQ40GW test report		30(31)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	June 29 – July 07, 2004	RIM-0094-0407-03	L6ARAQ40GW

Date/Time: 07/07/04 12:08:42

Test Laboratory: Research In Motion Limited

Body worn with holster; Mid Chan; GSM 1900 band; BAT-06860-001 (CS-1) Sanyo GS battery with headset and Bluetooth ON; Ambient temp. 23.1 deg. cel. ; Liquid temp. 22.1 deg. cel


DUT: BlackBerry 7100 Wireless Handheld Model RAQ40GW; Type: Sample

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: M1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 50.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1643; ConvF(4.8, 4.8, 4.8); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 09/10/2003
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Reference Value = 14.8 V/m; Power Drift = 0.0 dB
Maximum value of SAR (interpolated) = 0.671 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.8 V/m; Power Drift = 0.0 dB
Maximum value of SAR (measured) = 0.676 mW/g
Peak SAR (extrapolated) = 0.971 W/kg
SAR(1 g) = 0.625 mW/g; SAR(10 g) = 0.392 mW/g

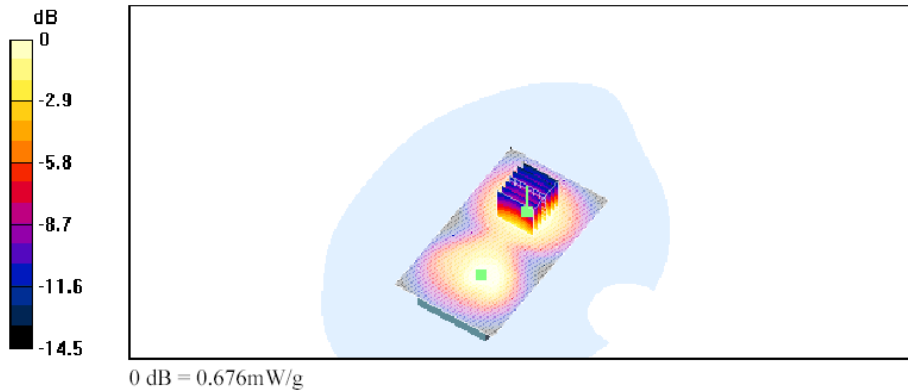

file://C:\Program%20Files\DASY4\Print_Templates\Body%20worn%20with%20holster;... 07/07/2004

Z-axis plots for worst-case configuration:

