

<b>RTS</b> <b>RIM Testing Services</b>	Document <b>Appendix for the BlackBerry® Smartphone Model RCC51UW</b> <b>SAR Report</b>		Page <b>1(5)</b>
Author Data <b>Jean-Paul Hacquoil</b>	Dates of Test <b>Sep 25 - Oct 07, 2008</b>	Test Report No <b>RTS-1191-0810-09</b>	FCC ID: <b>L6ARBCC50UW</b>

**APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION**

<b>RTS</b> <b>RIM Testing Services</b>	Document <b>Appendix for the BlackBerry® Smartphone Model RCC51UW</b> <b>SAR Report</b>		Page <b>2(5)</b>
	Author Data <b>Jean-Paul Hacquoil</b>	Dates of Test <b>Sep 25 - Oct 07, 2008</b>	Test Report No <b>RTS-1191-0810-09</b>

Date/Time: 25/09/2008 11:55:24 AM

Test Laboratory: RTS

File Name: [DipoleValidation\\_835MHz\\_Amb\\_Tem\\_22.7\\_Liq\\_Tem\\_21.9C.da4](#)

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446**  
**Program Name: System Performance Check at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.859 \text{ mho/m}$ ;  $\epsilon_r = 40.4$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1642; ConvF(6.42, 6.42, 6.42); Calibrated: 18/01/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 05/03/2008
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**d=15mm, Pin=1000mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 112.3 V/m; Power Drift = -0.042 dB  
Peak SAR (extrapolated) = 13.0 W/kg  
**SAR(1 g) = 9.11 mW/g; SAR(10 g) = 6.01 mW/g**  
Maximum value of SAR (measured) = 9.86 mW/g

**d=15mm, Pin=1000mW/Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (interpolated) = 9.94 mW/g

<b>RTS</b> <b>RIM Testing Services</b>	Document <b>Appendix for the BlackBerry® Smartphone Model RCC51UW</b> <b>SAR Report</b>		Page <b>3(5)</b>
	Author Data <b>Jean-Paul Hacquoil</b>	Dates of Test <b>Sep 25 - Oct 07, 2008</b>	Test Report No <b>RTS-1191-0810-09</b>

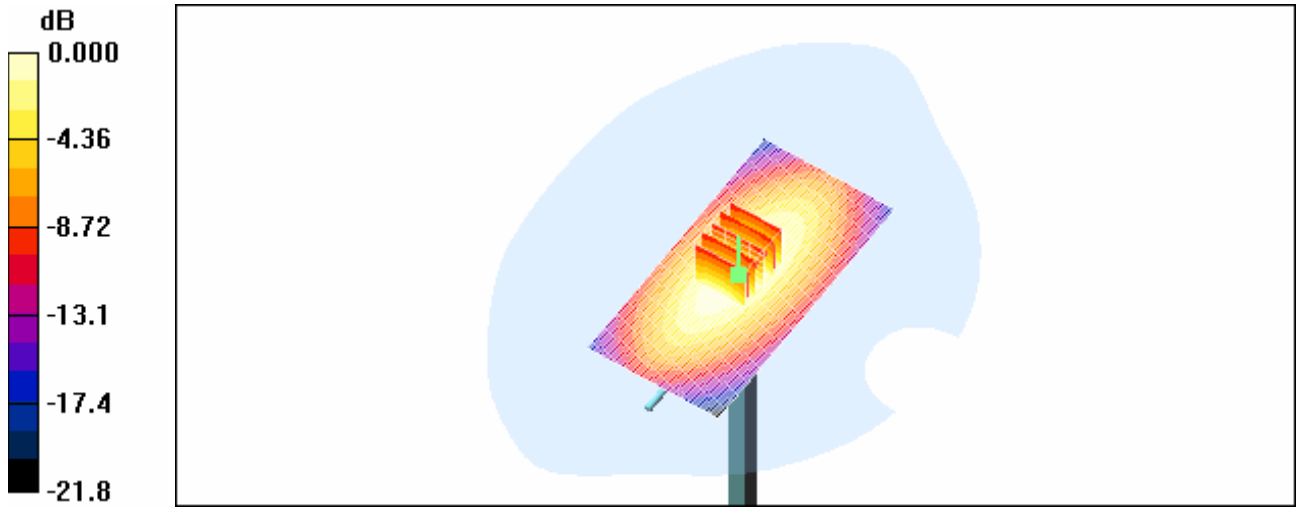

0 dB = 9.94mW/g

<b>RTS</b> RIM Testing Services	Document <b>Appendix for the BlackBerry® Smartphone Model RCC51UW  SAR Report</b>		Page <b>4(5)</b>
	Author Data <b>Jean-Paul Hacquoil</b>	Dates of Test <b>Sep 25 - Oct 07, 2008</b>	Test Report No <b>RTS-1191-0810-09</b>

Date/Time: 07/10/2008 12:27:28 PM

Test Laboratory: RTS

File Name: [DipoleValidation\\_1900MHz\\_Amb\\_Tem\\_22.9\\_Liq\\_Tem\\_22.1\\_C.da4](#)

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545**  
**Program Name: System Performance Check at 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 38.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1642; ConvF(5.15, 5.15, 5.15); Calibrated: 18/01/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 05/03/2008
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 186.8 V/m; Power Drift = 0.029 dB  
Peak SAR (extrapolated) = 68.6 W/kg  
**SAR(1 g) = 40.3 mW/g; SAR(10 g) = 21.2 mW/g**  
Maximum value of SAR (measured) = 45.5 mW/g

**d=15mm, Pin=1000mW/Area Scan (21x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 47.8 mW/g

<b>RTS</b> <b>RIM Testing Services</b>	Document <b>Appendix for the BlackBerry® Smartphone Model RCC51UW</b> <b>SAR Report</b>		Page <b>5(5)</b>
	Author Data <b>Jean-Paul Hacquoil</b>	Dates of Test <b>Sep 25 - Oct 07, 2008</b>	Test Report No <b>RTS-1191-0810-09</b>

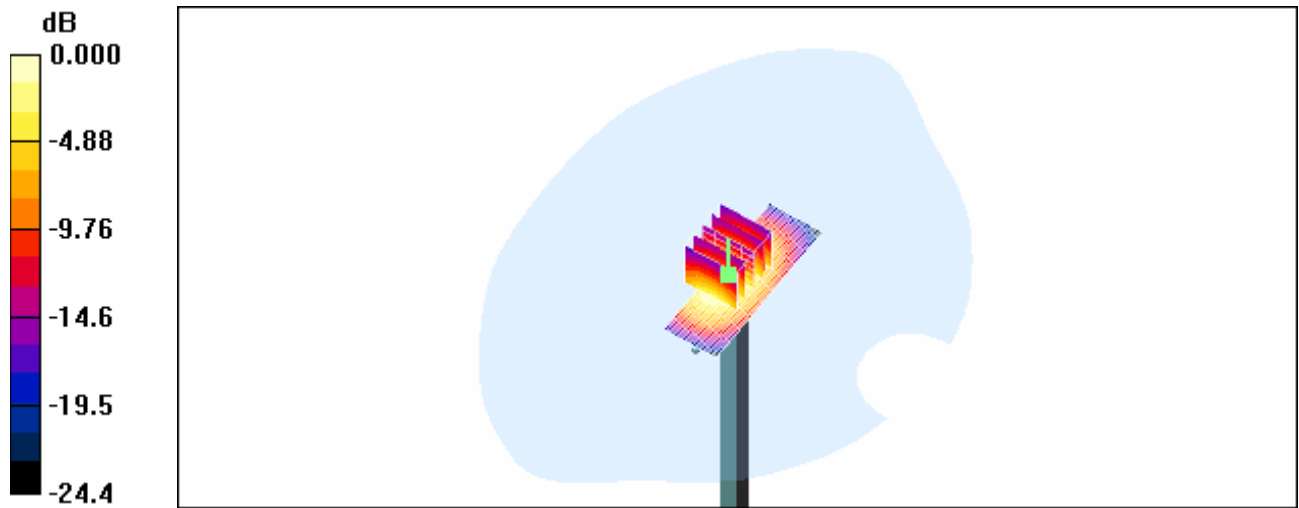

0 dB = 47.8mW/g