

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 2, 22 and 24
&
Industry Canada (IC) RSS-132, 133 and RSS-GEN




A division of Research In Motion Limited

REPORT NO.: RTS-2068-1009-16

PRODUCT MODEL NO.: RCL22CW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6ARCL20CW
IC: 2503A-RCL20CW
EMISSION DESIGNATOR: 1M29F9W

DATE: September 09, 2010

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW

Statement of Performance:

The BlackBerry® smartphone, model RCL22CW, part number CER-32267-001 Rev3, and accessories when configured and operated per RIM’s operation instructions, performs within the requirements of the test standards.

Declaration:

We hereby certify that:
The test data reported herein is an accurate record of the performance of the sample(s) tested.
The test results are valid for the tested unit (s) only.
The test equipment used was suitable for the tests performed and within manufacturer’s published specifications and operating parameters.
The test methods were consistent with the methods described in the relevant standards.

Documented by:



Quan (Jerry) Ma
Regulatory Compliance Associate
Date: September 10, 2010

Reviewed By:



Heng Lin
Regulatory Compliance Specialist
Date: September 10, 2010

Approved by:



Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance
Date: September 10, 2010



		EMI Test Report for the BlackBerry® smartphone Model RCL22CW
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW

Table of Contents

A.	Scope	4
B.	Associated Documents.....	4
C.	Product Identification	4
D.	Support Equipment Used for the Testing of the EUT	5
E.	Test Results Chart.....	6
F.	Summary of results.....	7
G.	Compliance Test Equipment Used	10
APPENDIX 1 - CONDUCTED RF EMISSIONS TEST DATA/PLOTS		12
APPENDIX 2 – CONDUCTED RF OUTPUT POWER TEST DATA		42
APPENDIX 3 – FREQUENCY STABILITY TEST DATA		44
APPENDIX 4 - RADIATED EMISSIONS TEST DATA		56

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW

A. Scope

This report details the results of compliance tests which were performed in accordance to the requirements of:

- FCC CFR 47 Part 2, October, 2009
- FCC CFR 47 Part 22, Subpart H, Cellular Radiotelephone Services, October, 2009
- FCC CFR 47 Part 24 Subpart E, Broadband PCS, October, 2009
- Industry Canada, RSS-132 Issue 2, September 2005, Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz.
- Industry Canada, RSS-133 Issue 5, February 2009, 2 GHz Personal Communications Services.
- Industry Canada, RSS-GEN Issue 2, June 02007, General Requirements and Information for the Certification of Radiocommunication Equipment

B. Associated Documents

- 1) 9330_RCL22CW_HW_Declaration_CER-32267-001_Rev 3
- 2) MultiSourceDeclaration_9330_b1393
- 3) MultiSourceDeclaration_9330_b1416
- 4) MultiSourceDeclaration_9330_b1423
- 5) MultiSourceDeclaration_9330_b1438

C. Product Identification

Manufactured by Research In Motion Limited whose headquarters is located at:
295 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906


The equipment under test (EUT) was tested at the following locations:

RIM Testing Services EMI test facilities

305 Phillip Street	440 Phillip Street
Waterloo, Ontario	Waterloo, Ontario
Canada, N2L 3W8	Canada, N2L 5R9
Phone: 519 888 7465	Phone: 519 888 7465
Fax: 519 888 6906	Fax: 519 888 6906

The testing was performed from August 10 to September 9, 2010.

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services
- A division of Research in Motion Limited.

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW	

The sample BlackBerry® smartphones tested were:

SAMPLE	MODEL	CER NUMBER	PIN	Software
1	RCL22CW	CER-32267-001Rev 3	324AD10F	V. 5.0.0.857 (Platform 4.2.0.383) Bundle 1438
2	RCL22CW	CER-32267-001Rev 3	324AD110	V. 5.0.0.782 (Platform 4.2.0.352) Bundle 1320
3	RCL22CW	CER-32267-001Rev 3	324AD10D	V. 5.0.0.857 (Platform 4.2.0.383) Bundle 1438
4	RCL22CW	CER-32267-001Rev 3	324AD10C	V. 5.0.0.782 (Platform 4.2.0.352) Bundle 1320

Conducted RF measurements were performed on BlackBerry® smartphone sample 1. Radiated Emission measurements were performed on BlackBerry® smartphone sample 2 and 4.

Conducted Power measurements were performed on BlackBerry® smartphone sample 3.


To view the differences between Rev2 to Rev 3, see documents 9330_RCL22CW_HW_Declaration_CER-32267_Rev3-new PA.

To view the differences between SW Bundle1320 to Bundle 1438, see documents
MultiSourceDeclaration_9330_b1393
MultiSourceDeclaration_9330_b1416
MultiSourceDeclaration_9330_b1423
MultiSourceDeclaration_9330_b1438

The characteristics that may have been impacted between Rev 2 and 3 were re-tested.


D. Support Equipment Used for the Testing of the EUT

No support equipment required; for list of equipment refer to section G, Compliance Test Equipment Used.

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW	

E. Test Results Chart

SPECIFICATION		TEST TYPE	RESULT	TEST DATA APPENDIX
FCC CFR 47	IC			
Part 2.1051 Part 22.917 Part 22.901(d)	RSS-GEN, 4.9	CDMA Cell Conducted Spurious Emissions	Pass	1
Part 2.1051 Part 24.238(a)	RSS-GEN, 4.9	CDMA PCS Conducted Spurious Emissions	Pass	1
Part 2.202 Part 22.917	RSS-GEN, 4.6	CDMA Cell Occupied Bandwidth and Channel Mask	Pass	1
Part 2.202 Part 24.238	RSS-GEN, 4.6	CDMA PCS Occupied Bandwidth and Channel Mask	Pass	1
Part 2.1046(a)	RSS-133, 6.4 RSS-132, 4.4	CDMA Conducted RF Output Power	Pass	2
Part 2.1055(a)(d) Part 22.917	RSS-132, 4.3	CDMA Cell Frequency Stability vs. Temperature and Voltage	Pass	3
Part 2.1055(a)(d) Part 24.235	RSS-GEN, 4.7	CDMA PCS Frequency Stability vs. Temperature and Voltage	Pass	3
Part 22, Subpart H	RSS-GEN, 4.9	CDMA Cell Radiated Spurious/Harmonic Emissions, ERP	Pass	4
Part 24, Subpart E	RSS-GEN, 4.9	CDMA PCS Radiated Spurious/Harmonic Emissions, EIRP	Pass	4

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW	

F. Summary of results

1) Conducted emission Measurements

- a) The BlackBerry® smartphone met the requirements of the Conducted Spurious Emissions in the Cellular band as per 47 CFR 2.1051, 22.917, CFR 22.901(d) and RSS-132. The EUT was measured in Loopback and 1xEVDO mode on the low, middle and high channels. The frequency range investigated was from 10 MHz to 10 GHz.
See APPENDIX 1 for the test data.


The BlackBerry® smartphone met the requirements of the Conducted Spurious Emissions in the PCS band as per 47 CFR 2.1057, CFR 24.238 and RSS-133. The EUT was measured in Loopback and 1xEVDO mode on the low, middle and high channels. The frequency range investigated was from 10 MHz to 20 GHz.
See APPENDIX 1 for the test data.

- b) The BlackBerry® smartphone met the requirements of the Occupied Bandwidth in the Cellular band as per 47 CFR 2.202, CFR 22.917 and RSS-132. The EUT was measured in Loopback and 1xEVDO mode on the low, middle and high channels. The worst case occupied bandwidth was 1.287 MHz on middle channels
See APPENDIX 1 for the test data.

The BlackBerry® smartphone met the requirements of the Occupied Bandwidth and Band Edge Compliance in the PCS band as per 47 CFR 2.202, CFR 24.238 and RSS-133. The EUT was measured in Loopback and 1xEVDO mode on the low, middle and high channels. The worst case occupied bandwidth was 1.280 MHz on the low, middle and high channel.
See APPENDIX 1 for the test data.

- c) The BlackBerry® smartphone met the requirements of the Conducted RF Output Power for both the Cellular and PCS bands. The EUT was measured in Loopback and 1xEVDO mode on the low, middle and high channels. The worst case conducted output power for the cellular band was 23.7 dBm (0.23W) on the mid channel. The worst case conducted output power for the PCS band was 23.8 dBm (0.24W) on the low channel.
See APPENDIX 2 for the test data.

- d) The BlackBerry® smartphone met the requirements of the Frequency Stability vs. Temperature and Voltage for Cellular band as per 22.917 and RSS-132. The maximum frequency error measured was less than 0.1 ppm. The temperature range was from -30°C to +60°C in 10° temperature steps. BlackBerry® smartphone was measured on low, middle and high channels at each

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW	

temperature step. BlackBerry® smartphone was measured at low (3.6 volts), nominal (3.7 volts) and high (4.2 volts) dc input voltage at each temperature step and channel at maximum output power. See APPENDIX 3 for the test data.

BlackBerry® smartphone met the requirements of the Frequency Stability vs. Temperature and Voltage requirements for the PCS band as per 24.235 and RSS-133. The maximum frequency error measured was less than 0.1 ppm. The temperature range was from -30°C to +60°C in 10 degree temperature steps. BlackBerry® smartphone was measured on low, middle and high channels at each temperature step. BlackBerry® smartphone was measured at low (3.6 volts), nominal (3.7 volts) and high (4.2 volts) dc input voltage at each temperature step and channel at maximum output power. See APPENDIX 3 for the test data.

2) Radiated Emission Measurements


a) Radiated Spurious and Harmonics emissions

The radiated spurious emissions/harmonics and ERP/EIRP were measured for both Cellular and PCS bands. The results are within the limits. BlackBerry® smartphone was placed on a nonconductive styrofoam table, 100 cm high that was positioned on a remote controlled turntable. The test distance used between the BlackBerry® smartphone and the receiving antenna was three metres. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The turntable was rotated to determine the azimuth of the peak emissions. Both the horizontal and vertical polarizations of the emissions were measured. The maximum emissions level was recorded. The BlackBerry® smartphone was then substituted with an antenna placed in the same location as the BlackBerry® smartphone. A Dipole antenna was used for the ERP measurements and a Horn antenna was used for EIRP measurements. The substitution antenna was connected into a signal generator that was set to the test frequency.

The emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The signal generator output was then adjusted to match the BlackBerry® smartphone output reading. The signal generator output was recorded. Both the horizontal and vertical polarizations of the emissions were measured.

The following measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a fully-anechoic room (FAR) above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The FAR's FCC registration number is **959115** and the IC file number is **2503C-1**. The BlackBerry® smartphone was measured on the low, middle and high channels.

The highest ERP measured in the Cellular band, Loopback Service mode, was 25.94 dBm (0.39 W) at 836.52 MHz (channel 384).

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW

The highest ERP measured in the Cellular band, 1xEVDO mode, was 26.81 dBm (0.48 W) at 824.70 MHz (channel 1013).

The highest EIRP measured in the PCS band, Loopback Service mode, was 22.84 dBm (0.19 W) at 1880 MHz (channel 600).

The highest EIRP measured in the PCS band, 1xEVDO mode, was 26.15 dBm (0.41 W) at 1851.25 MHz (channel 25)

The radiated carrier harmonics were measured up to the 10th harmonic for low, middle and high channels in the Cellular and PCS bands. Each band was measured in Loopback, Testdata, and 1xEVDO modes. Both the horizontal and vertical polarizations were measured.

All emissions in both cellular and PCS band were more than 25dB below the limit for all tested frequencies.


Sample Calculation:

Field Strength (dBµV/M) is calculated as follows:

$$FS = \text{Measured Level (dB}\mu\text{V)} + \text{A.F. (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp (dB)} + \text{Filter Loss (dB)}$$


Measurement Uncertainty ±4.6 dB

To view the test data see APPENDIX 4.

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW	

G. Compliance Test Equipment Used


<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Preamplifier	Sonoma	310N/11909A	185831	10-11-14	Radiated Emissions
Preamplifier system	TDK RF Solutions	PA-02	080010	10-11-06	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA4-SP	001	11-02-17	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA-SP	001	11-02-19	Radiated Emissions
Hybrid Log Antenna	TDK	HLP-3003C	017301	11-02-02	Radiated Emissions
Horn Antenna	TDK	HRN-0118	030101	12-07-20	Radiated Emissions
Horn Antenna	TDK	HRN-0118	030201	11-03-12	Radiated Emissions
Horn Antenna	ETS-Lindgren	3117	47653	11-07-15	Radiated Emissions
Horn Antenna	CMT	LHA 0180	R52734-001	12-01-21	Radiated Emissions
Preamplifier	TDK	18-26	030002	10-11-06	Radiated Emissions
Dipole Antenna	Schwarzbeck	UHAP	1018	11-03-12	Radiated Emissions
Dipole Antenna	Schwarzbeck	UHAP	974	11-10-16	Radiated Emissions
EMC Analyzer	Agilent	E7405A	US40240226	10-10-01	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	837493/073	10-11-30	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	112394	10-11-30	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	102204	10-11-25	RF Conducted Emissions
Universal Radio Communication Tester	Agilent	8960	MY47510358	11-03-06	Frequency Stability, RF Conducted Emissions
EMI Receiver	Rohde & Schwarz	ESIB-40	100255	10-11-30	Radiated Emissions
Spectrum Analyzer	HP	8563E	3745A08112	11-09-30	RF Conducted Emissions
DC Power Supply	HP	6632B	US37472178	10-09-03	RF Conducted Emissions
Environment Monitor	Control Company	1870	230355190	11-01-08	Radiated Emissions

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW	

Compliance Test Equipment Used cont'd

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Temperature Probe	Control Company	1870	230355190	11-01-08	Frequency Stability
Environmental Chamber	ESPEC Corp.	SH-240S1	91007118	N/R	Frequency Stability
Signal Generator	Agilent	8648C	4037U03155	11-12-10	Frequency Stability
Signal Generator	Agilent	E8257D	MY45140527	10-10-09	Radiated Emissions
Power Meter	Agilent	N1911A	MY45100905	11-01-05	Frequency Stability
Environment Monitor	Control Company	1870	230355189	11-01-08	RF Conducted Emissions
Power Sensor	Agilent	N1921A	SG45240281	11-05-22	Frequency Stability

APPENDIX 1 - CONDUCTED RF EMISSIONS TEST DATA/PLOTS


	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

The measurements were performed by Maurice Battler.

Test Setup Diagram

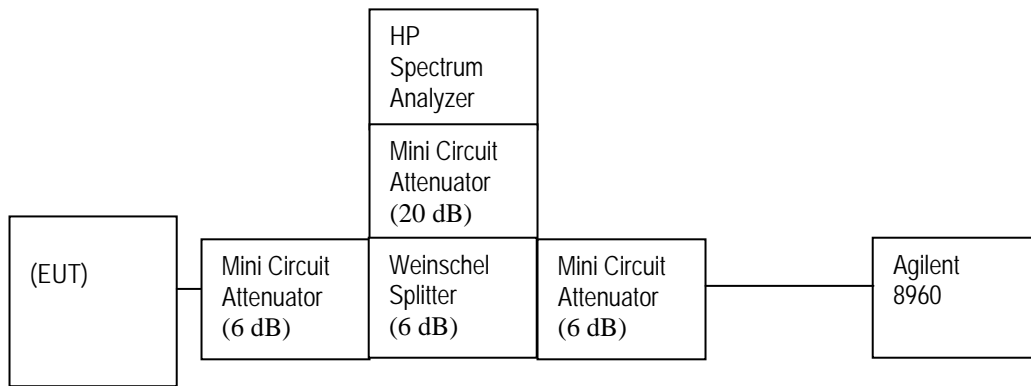


Date of Test: August 11, 2010

The following tests were performed by Maurice Battler.

The environmental test conditions were:

Temperature	24 °C
Pressure	1012 mb
Relative Humidity	36 %

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted RF Emission Test Data cont'd

The conducted spurious emissions – As per 47 CFR 2.1051, CFR 24.238(a), RSS-GEN, 4.9, CFR 22 Subpart H and RSS-132 were measured from 10 MHz to 20 GHz. The EUT emissions were in the noise floor.
See figures 1 to 12 for the plots of the conducted spurious emissions.

Test Data for Cellular and PCS selected Frequencies in Loopback mode

Cellular Frequency (MHz)	99% Occupied Bandwidth (MHz)
824.700	1.280
836.520	1.287
848.310	1.273

PCS Frequency (MHz)	99% Occupied Bandwidth (MHz)
1851.200	1.280
1880.000	1.280
1908.750	1.280

Measurement Plots for Cellular and PCS in Loopback mode


Refer to the following measurement plots for more detail.

See Figures 13 to 18 for plots of the 99% Occupied Bandwidth.

See Figures 19 to 22 for plots of the Band Edge Compliance.

See Figures 23 to 25 for plots of the Receiver Spurious Conducted Emissions.

The RF power output was at maximum for all the recorded measurements shown below.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 1: Cellular, Spurious Conducted Emissions, Low channel


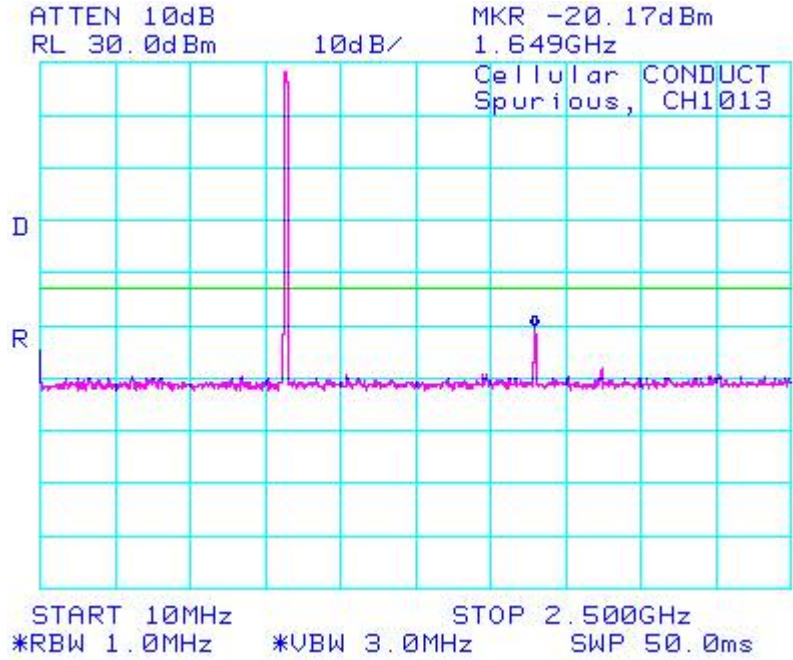



Figure 2: Cellular, Spurious Conducted Emissions, Low channel

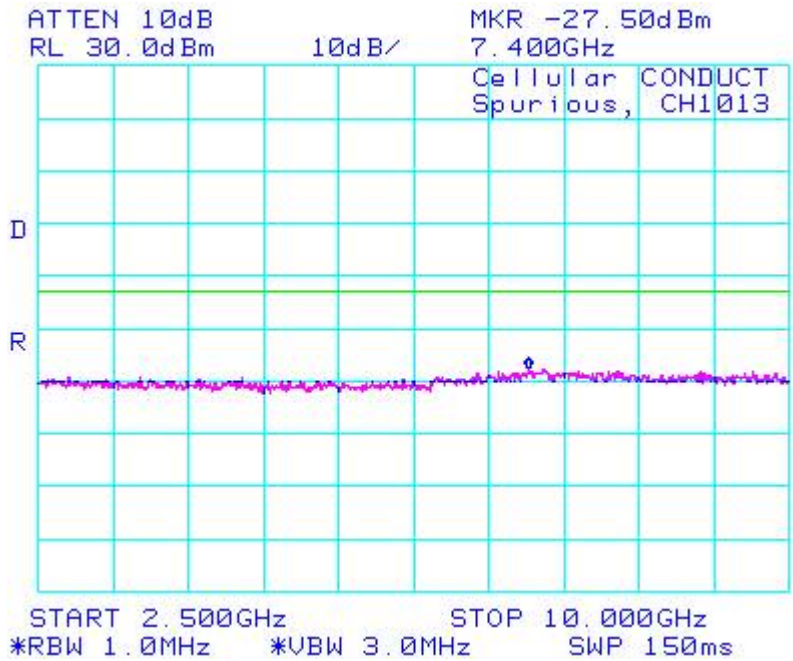

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 3: Cellular, Spurious Conducted Emissions, Middle Channel


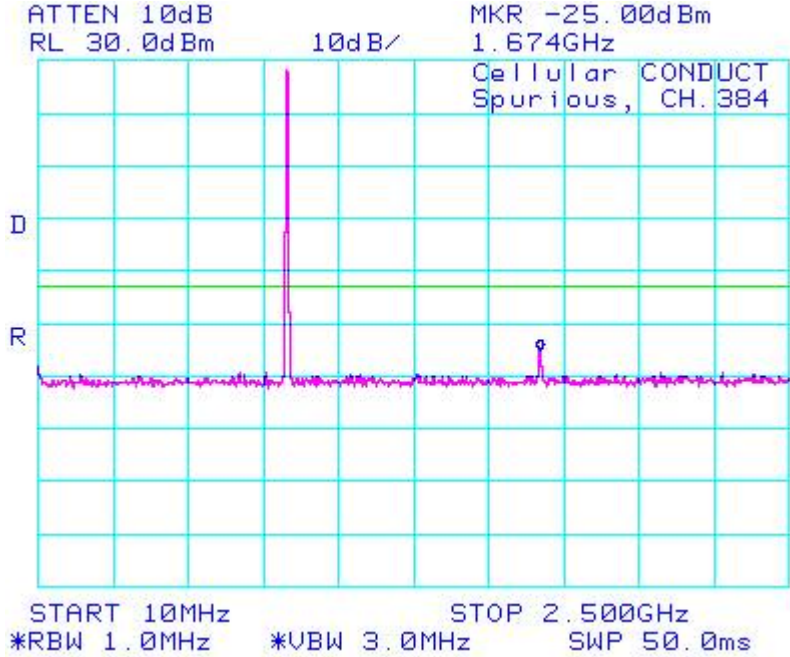



Figure 4: Cellular, Spurious Conducted Emissions, Middle Channel

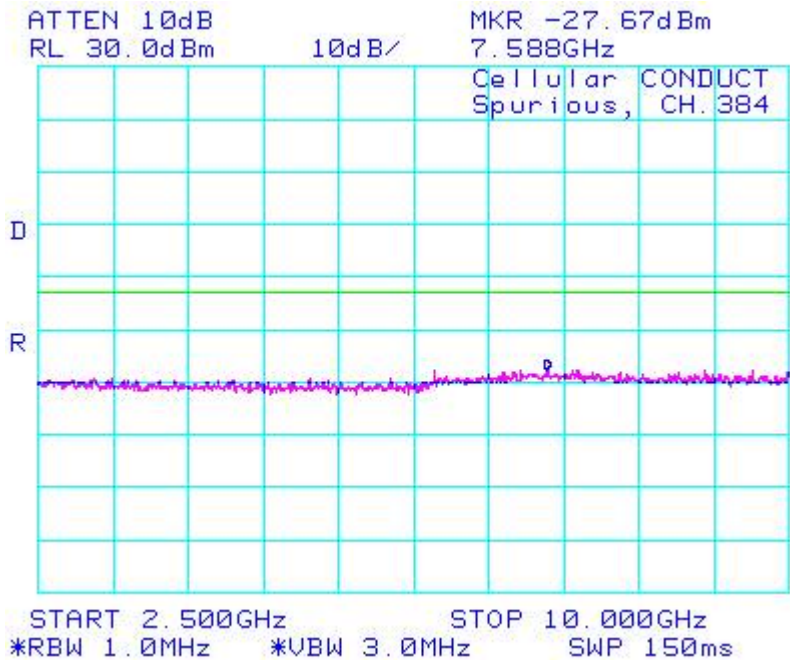

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 5: Cellular, Spurious Conducted Emissions, High Channel


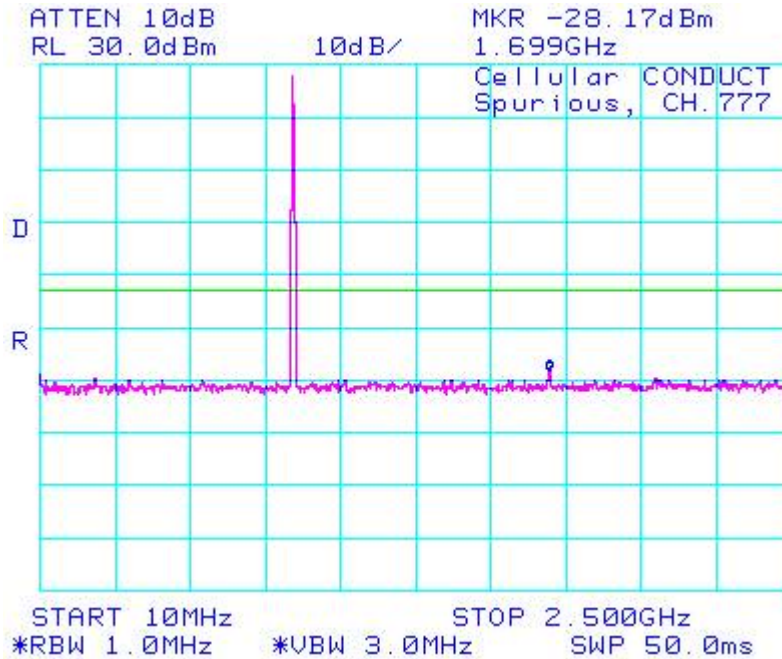



Figure 6: Cellular, Spurious Conducted Emissions, High Channel

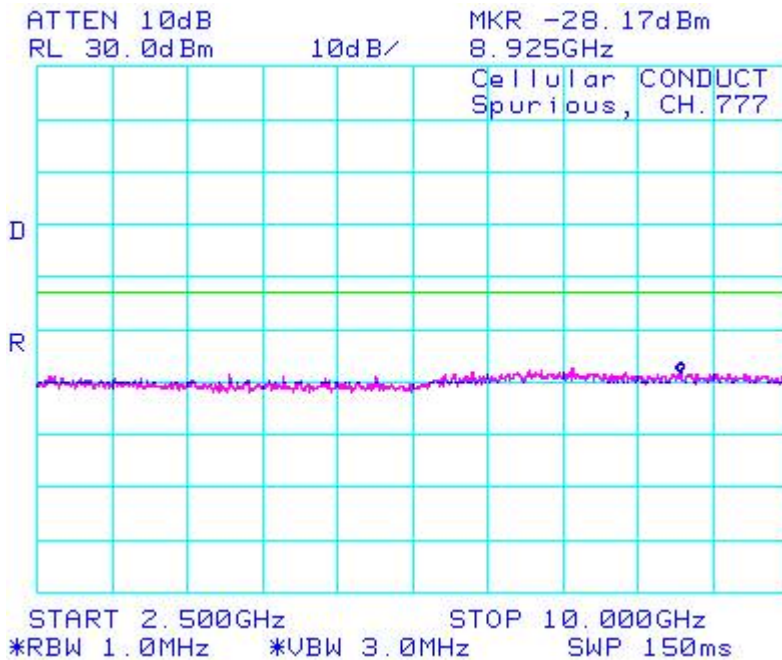

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 7: PCS, Spurious Conducted Emissions, Low Channel


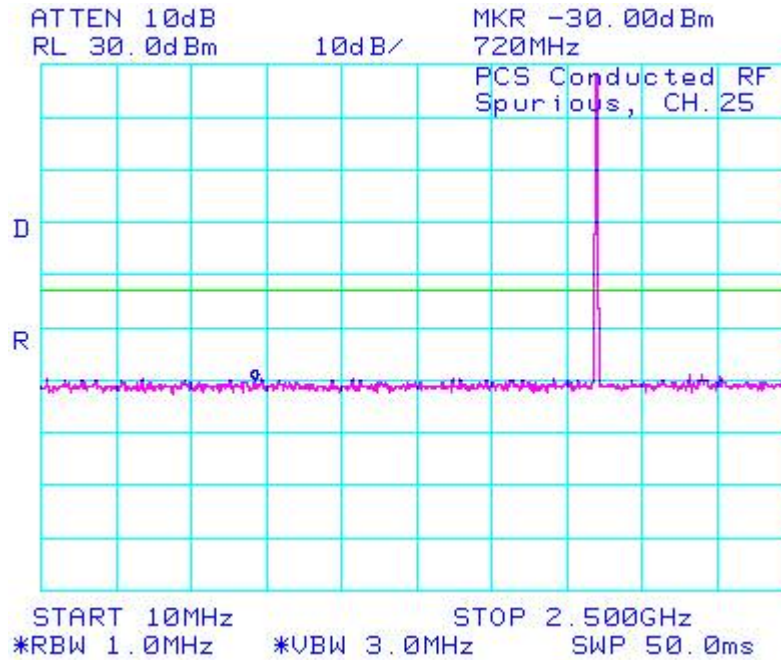



Figure 8: PCS, Spurious Conducted Emissions, Low Channel

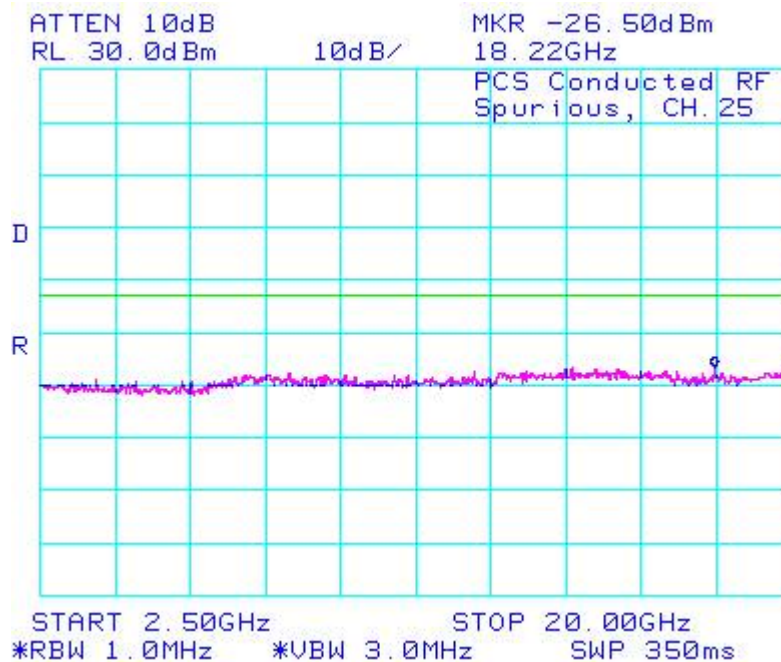

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 9: PCS, Spurious Conducted Emissions, Middle Channel


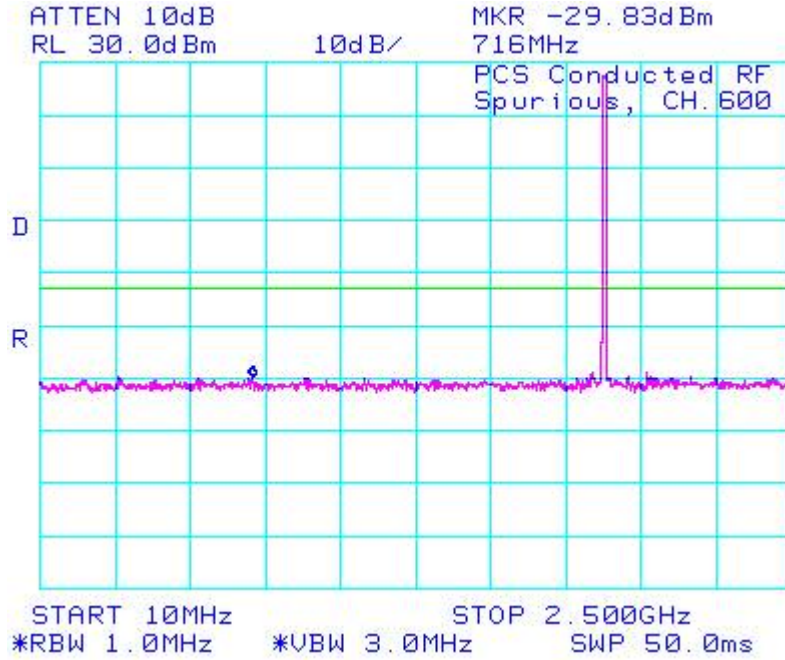



Figure 10: PCS, Spurious Conducted Emissions, Middle Channel

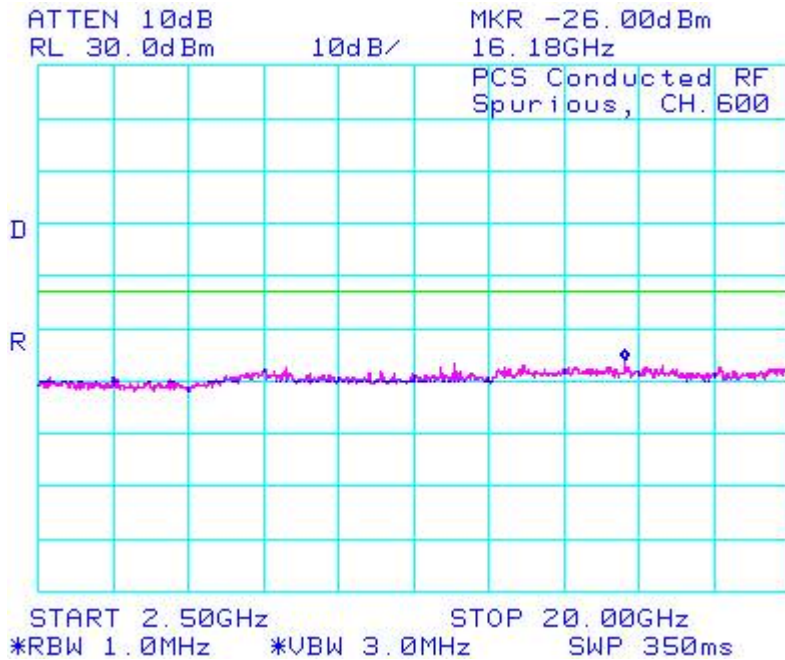

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 11: PCS, Spurious Conducted Emissions, High Channel


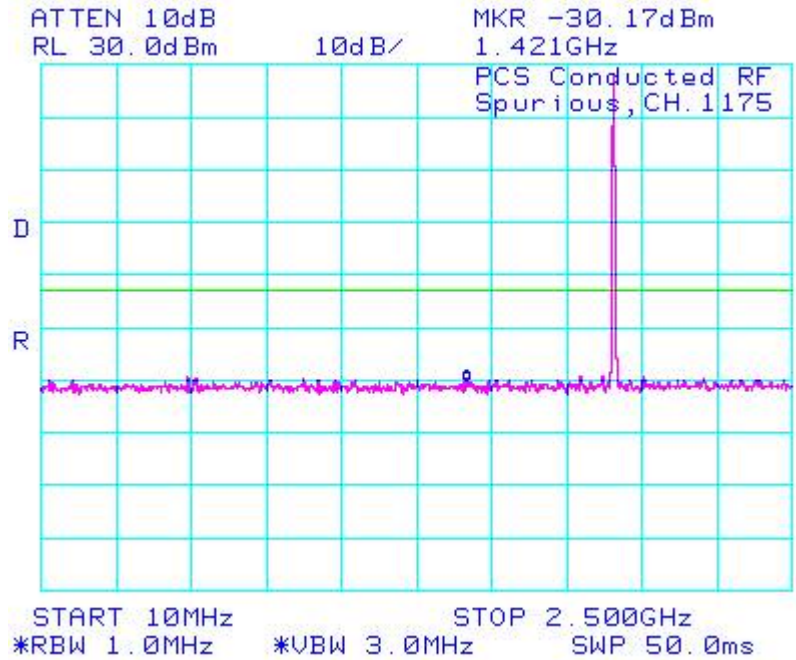



Figure 12: PCS, Spurious Conducted Emissions, High Channel

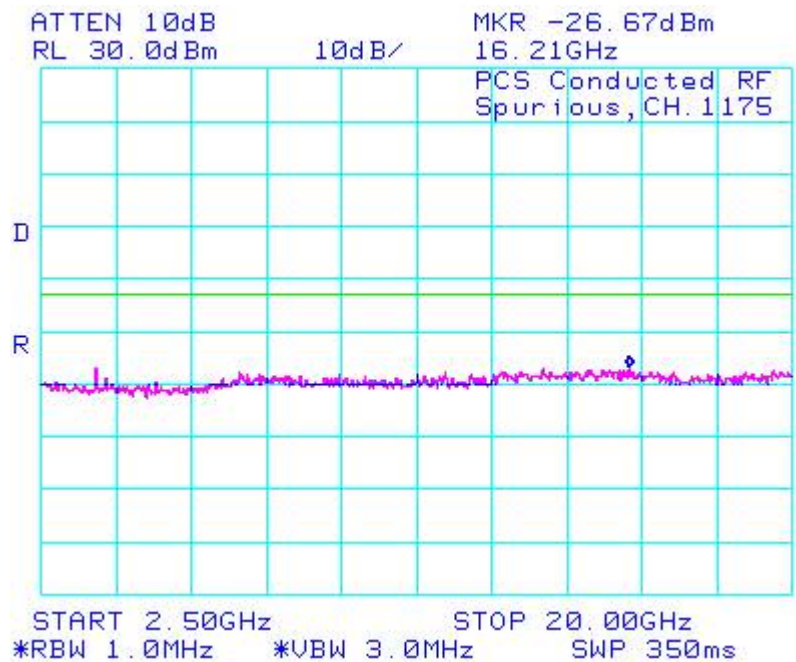

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 13: Occupied Bandwidth, Cellular Low Channel


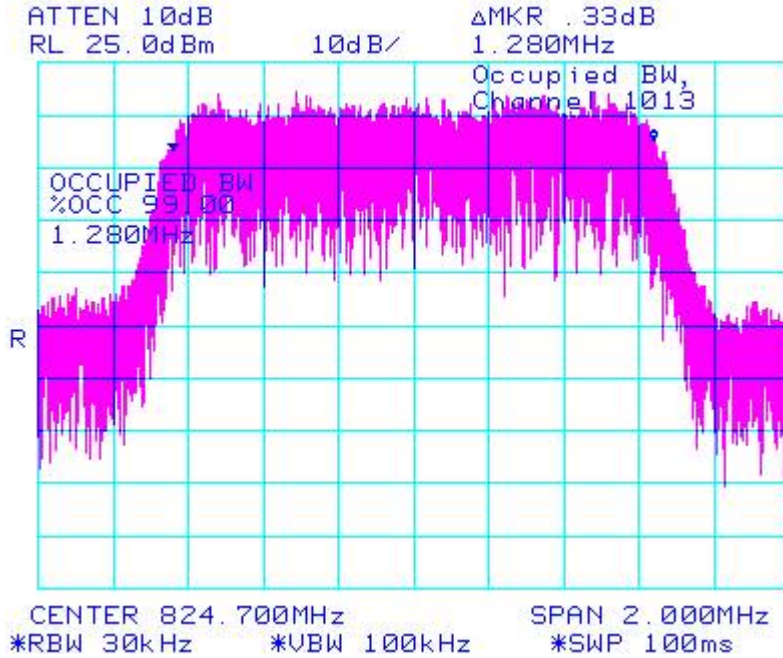



Figure 14: Occupied Bandwidth, Cellular Middle Channel

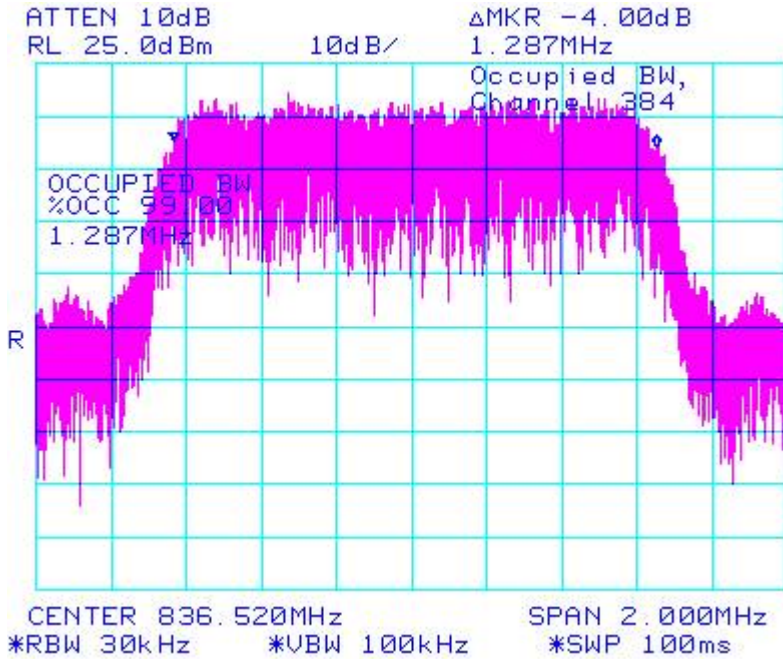

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 15: Occupied Bandwidth, Cellular High Channel


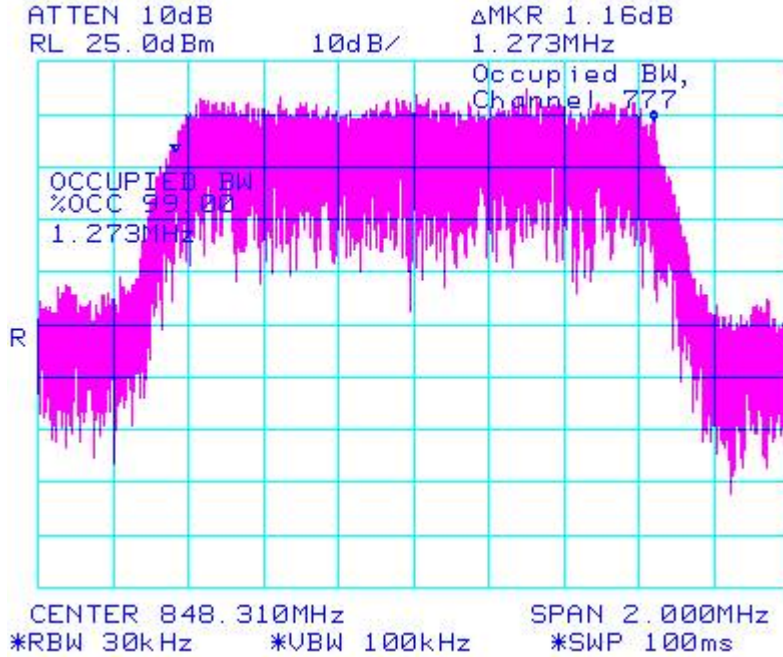



Figure 16: Occupied Bandwidth, PCS Low Channel

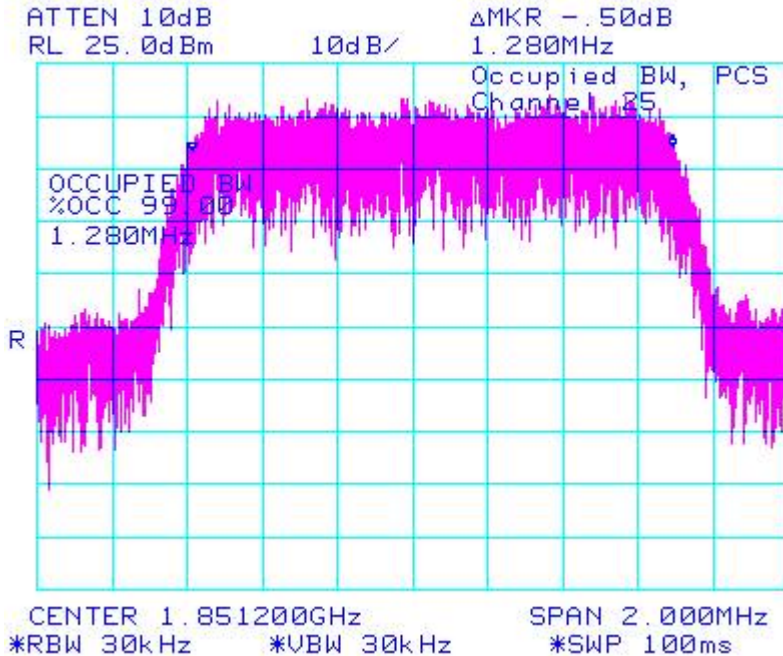

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 17: Occupied Bandwidth, PCS Middle Channel


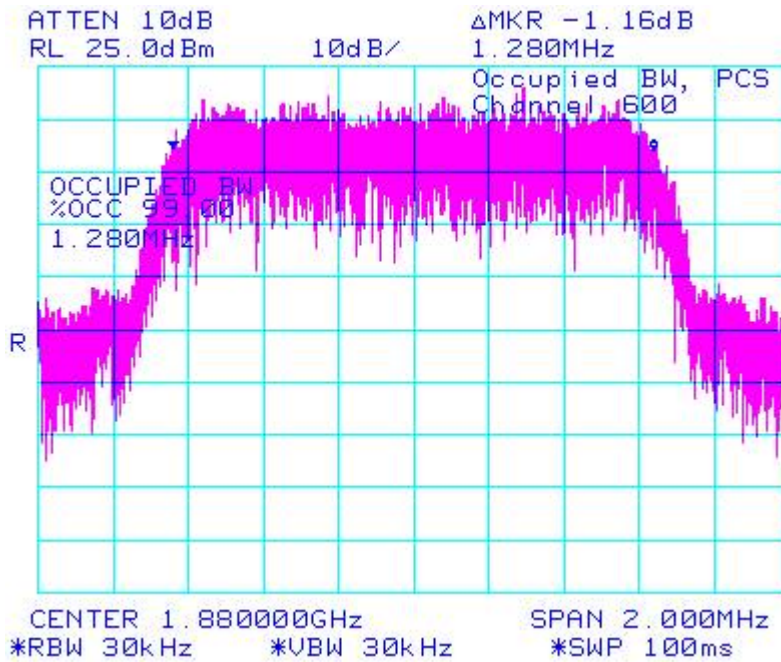



Figure 18: Occupied Bandwidth, PCS High Channel

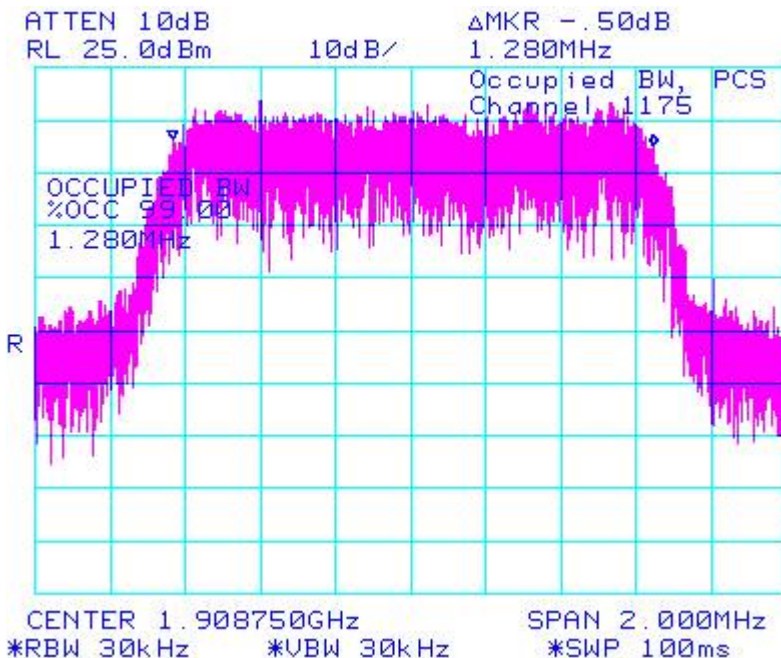

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 19a: Band Edge Compliance, Cellular Low Channel


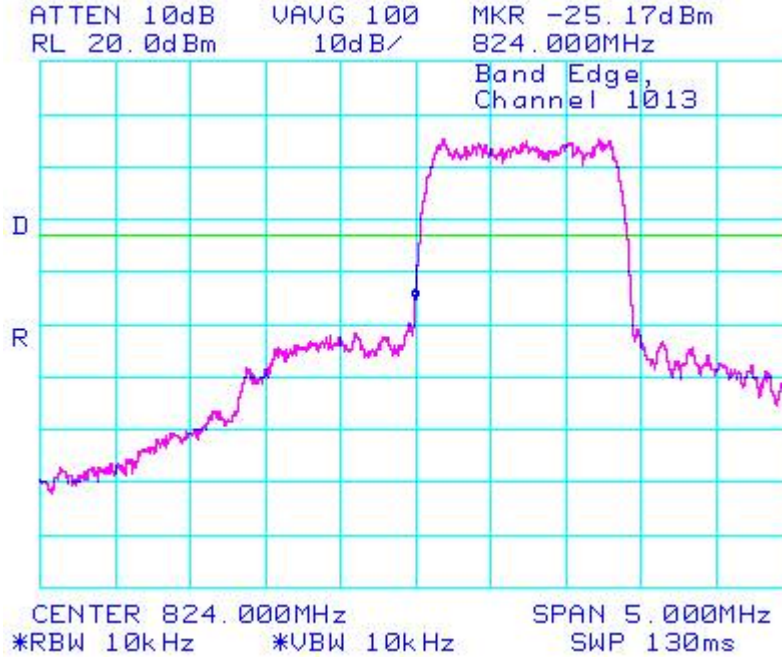



Figure 19b: Band Edge Compliance, Cellular Low Channel

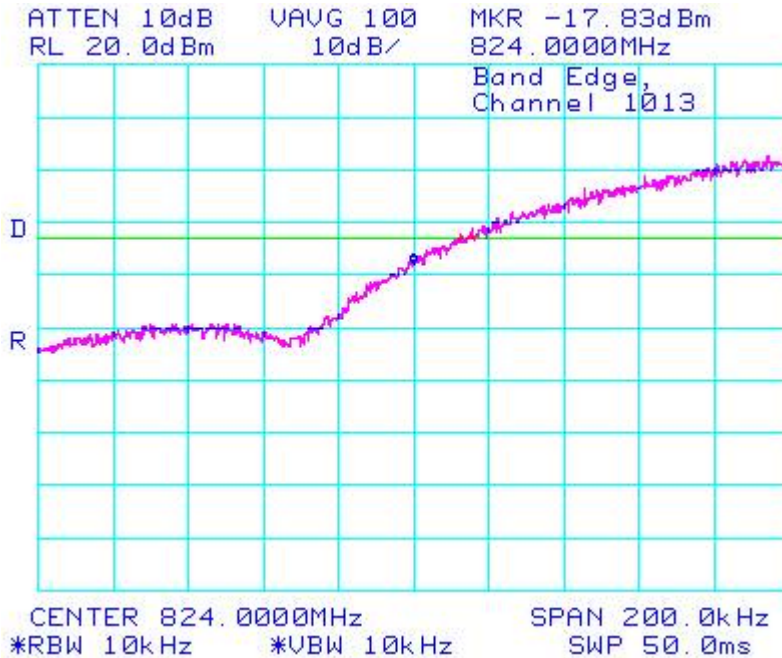

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 20a: Band Edge Compliance, Cellular High Channel


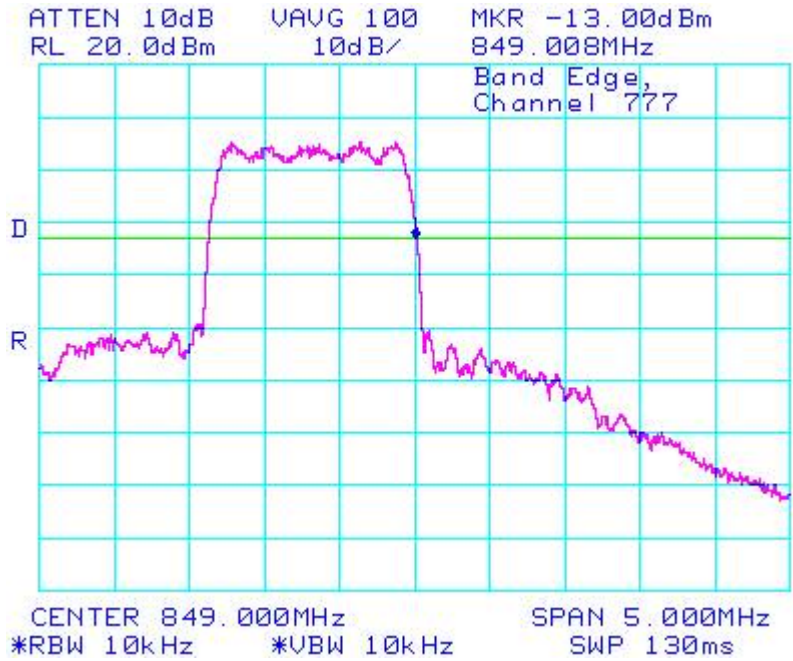



Figure 20b: Band Edge Compliance, Cellular High Channel

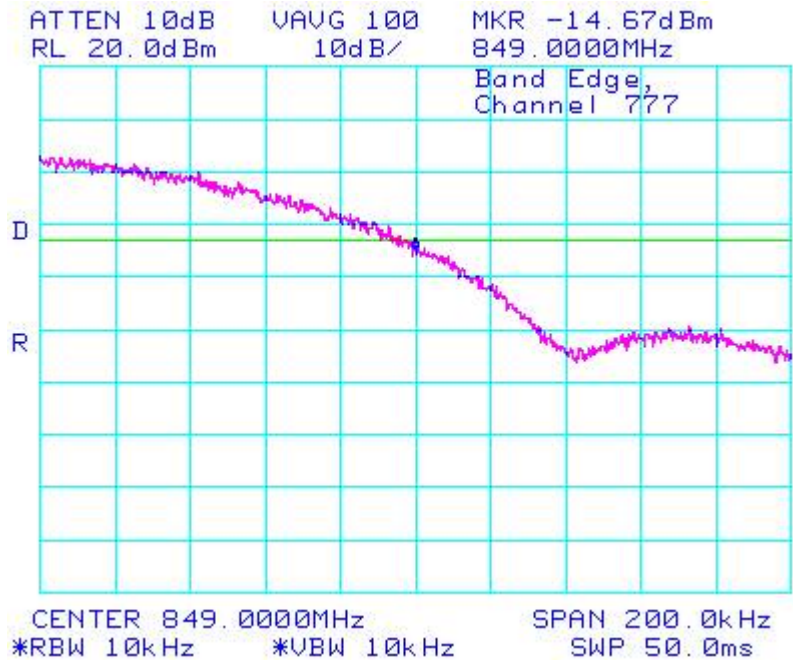

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 21: Band Edge Compliance, PCS Low Channel


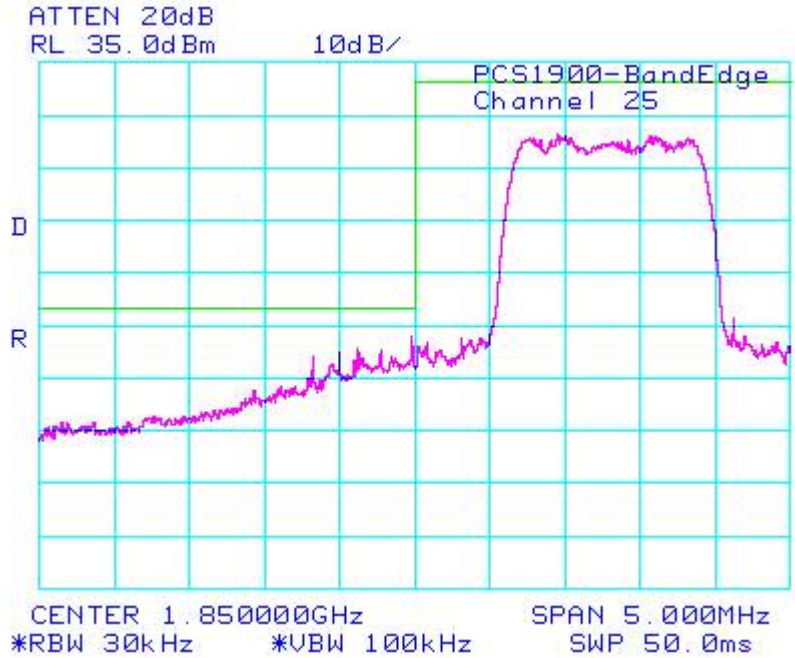


Figure 22: Band Edge Compliance, PCS High Channel

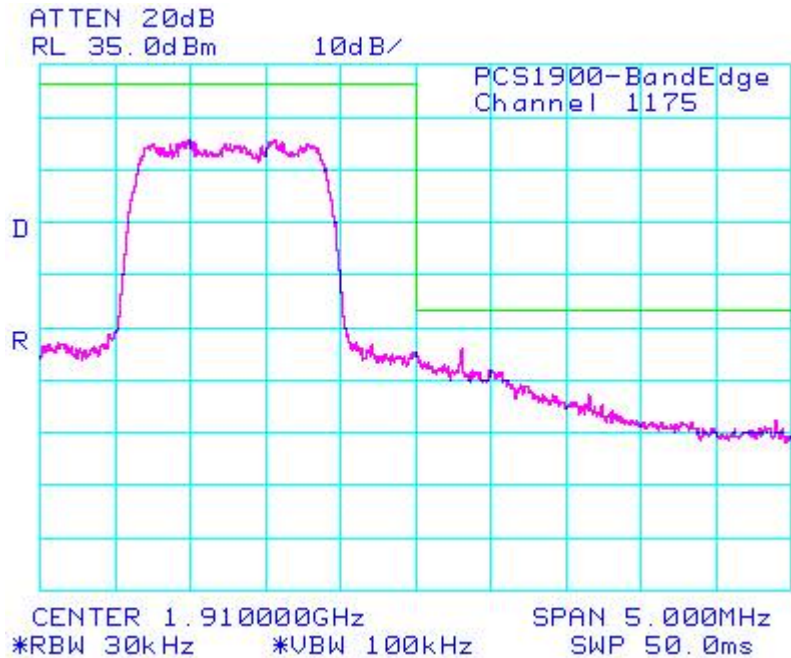

Conducted Emission Test Results cont'd


	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Figure 23: Receiver Spurious Conducted Emissions, 30 to 1000 MHz






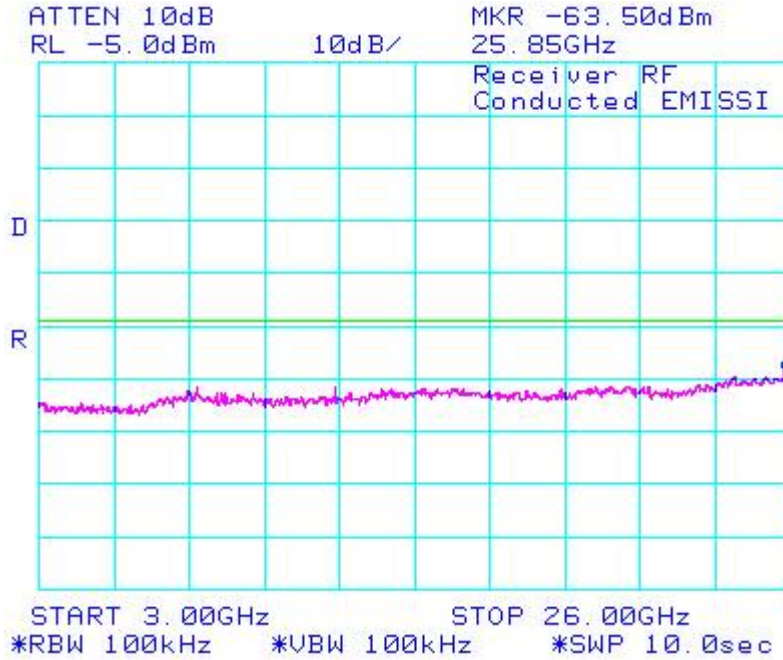
Figure 24: Receiver Spurious Conducted Emissions, 1.0 GHz to 3.0 GHz




	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

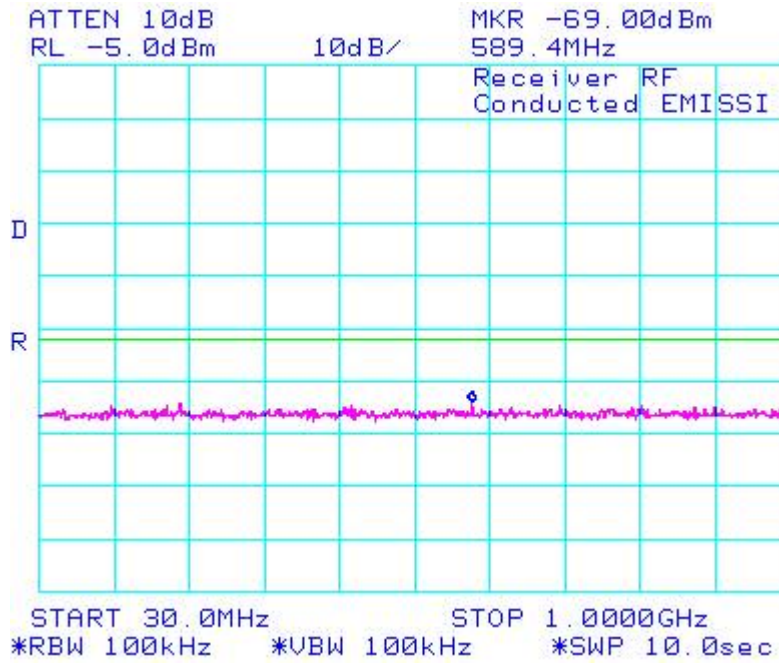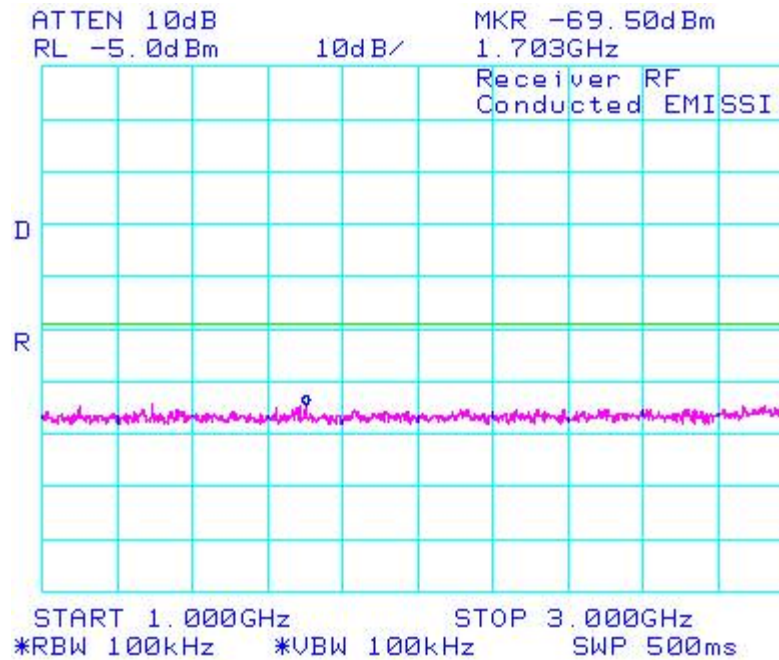Figure 25: Receiver Spurious Conducted Emissions, 3.0 GHz to 26 GHz



	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted RF Emission Test Data cont'd

The conducted spurious emissions – As per 47 CFR 2.1051, CFR 24.238(a), RSS-GEN, 4.9, CFR 22 Subpart H and RSS-132 were measured from 10 MHz to 20 GHz. The EUT emissions were in the NF.

See figures 26 to 37 for the plots of the conducted spurious emissions.

Date of Test: August 11, 2010

The environmental test conditions were:

Temperature	24 °C
Pressure	1012 mb
Relative Humidity	33 %

Test Data for Cellular and PCS selected Frequencies in 1xEVDO mode

Cellular Frequency (MHz)	99% Occupied Bandwidth (MHz)
824.700	1.287
836.520	1.287
848.310	1.280

PCS Frequency (MHz)	99% Occupied Bandwidth (MHz)
1851.200	1.287
1880.000	1.280
1908.750	1.273


Measurement Plots for Cellular and PCS in 1xEVDO mode

Refer to the following measurement plots for more detail.

See Figures 38 to 43 for the plots of the 99% Occupied Bandwidth.

See Figures 44 to 47 for plots of the Band Edge Compliance.

The RF power output was at maximum for all the recorded measurements shown below.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 26: Cellular, Spurious Conducted Emissions, Low channel


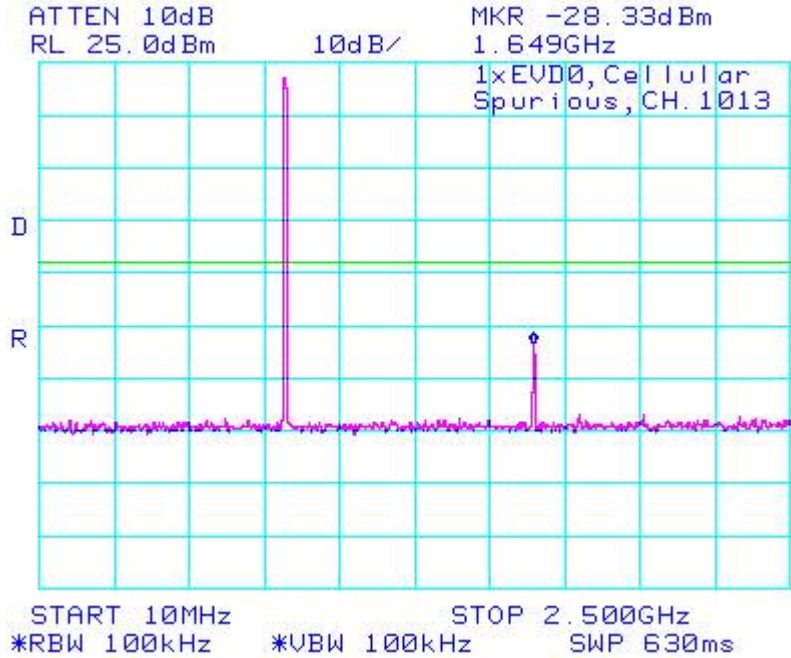



Figure 27: Cellular, Spurious Conducted Emissions, Low channel

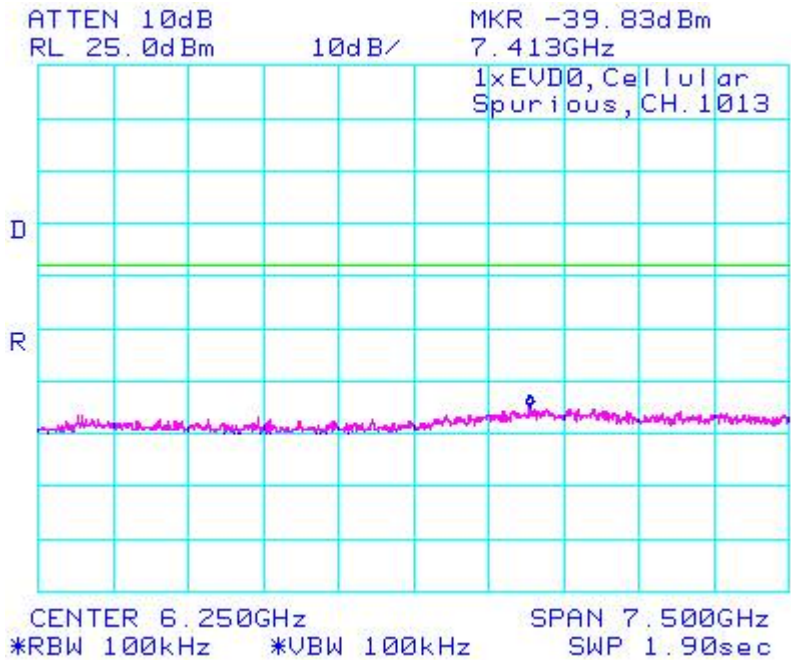

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 28: Cellular, Spurious Conducted Emissions, Middle Channel


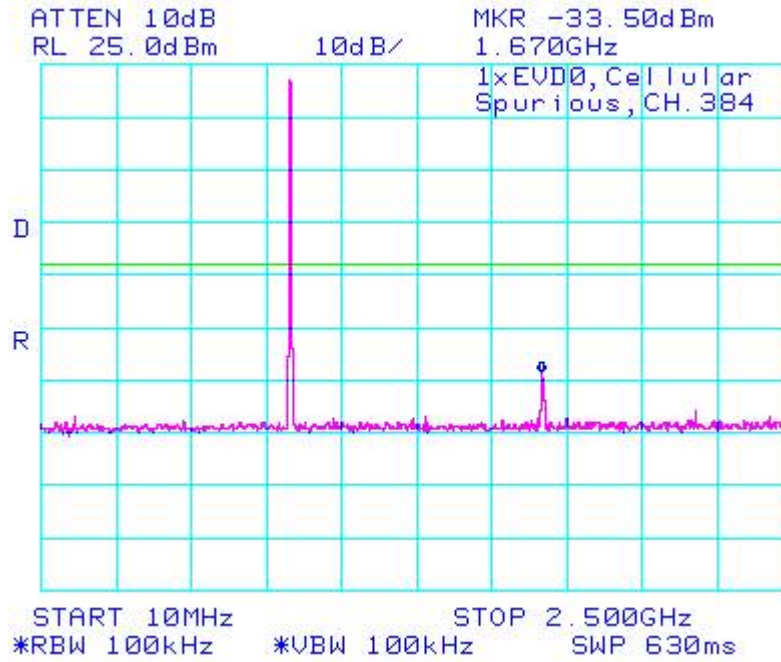



Figure 29: Cellular, Spurious Conducted Emissions, Middle Channel

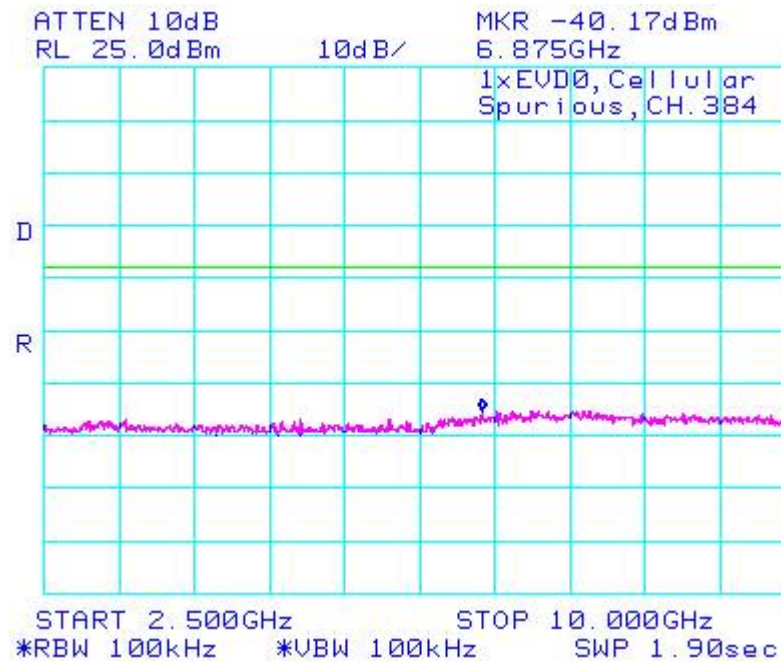

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 30: Cellular, Spurious Conducted Emissions, High Channel


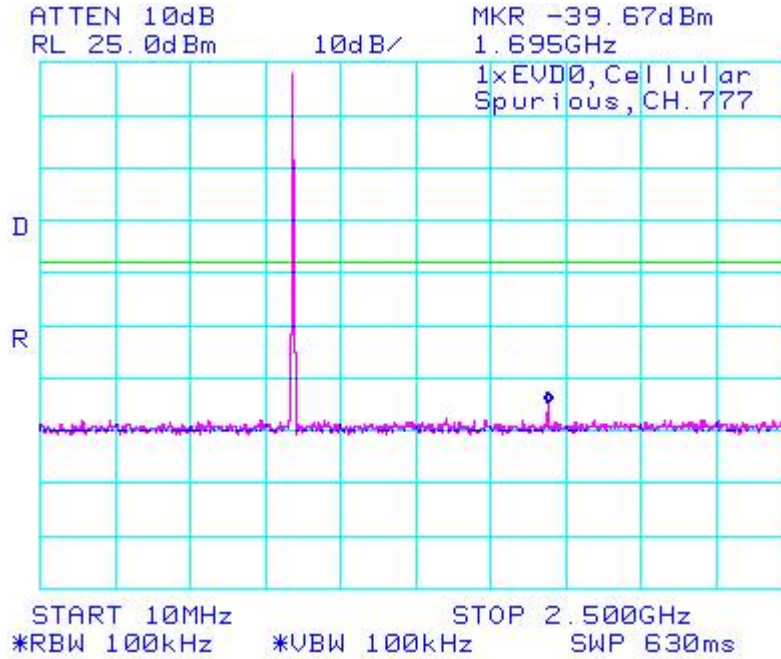



Figure 31: Cellular, Spurious Conducted Emissions, High Channel

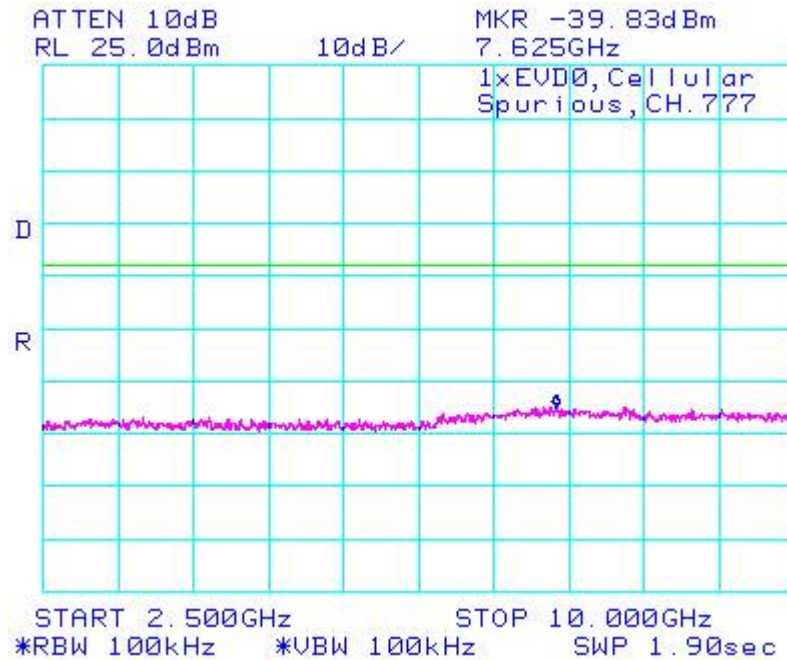

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 32: PCS, Spurious Conducted Emissions, Low Channel


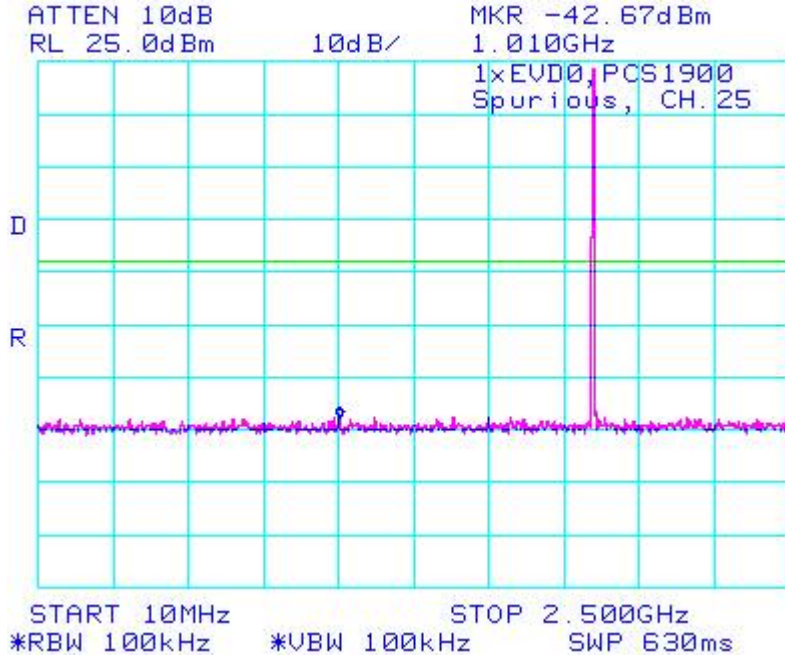



Figure 33: PCS, Spurious Conducted Emissions, Low Channel

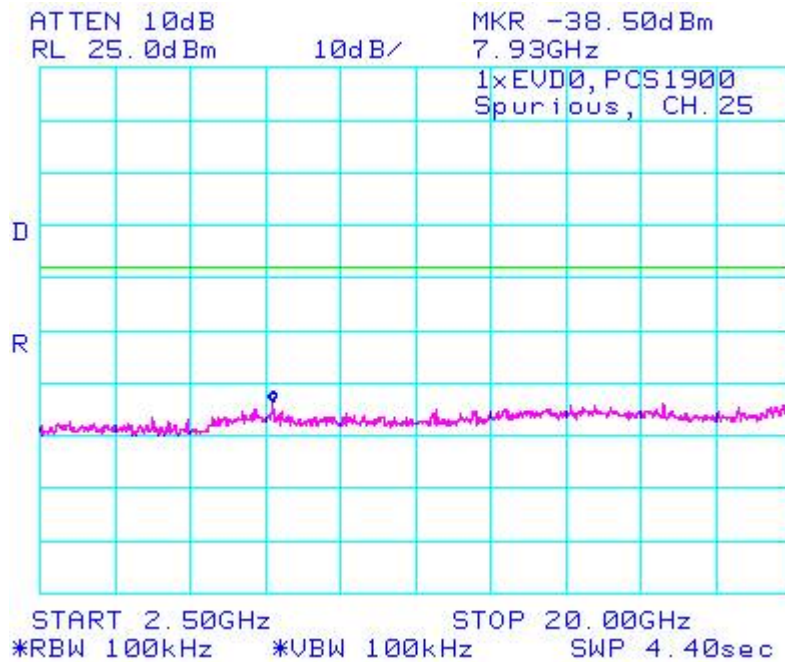

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 34: PCS, Spurious Conducted Emissions, Middle Channel


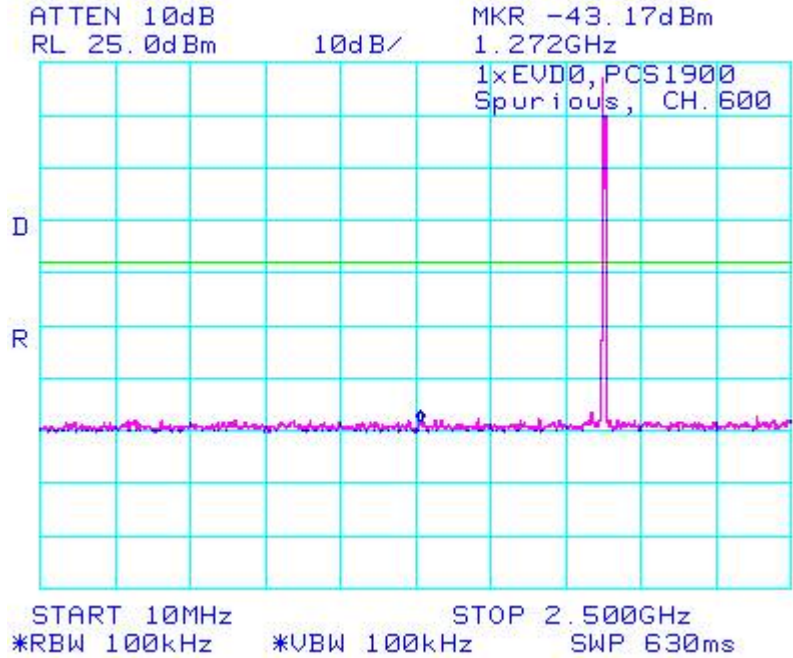



Figure 35: PCS, Spurious Conducted Emissions, Middle Channel

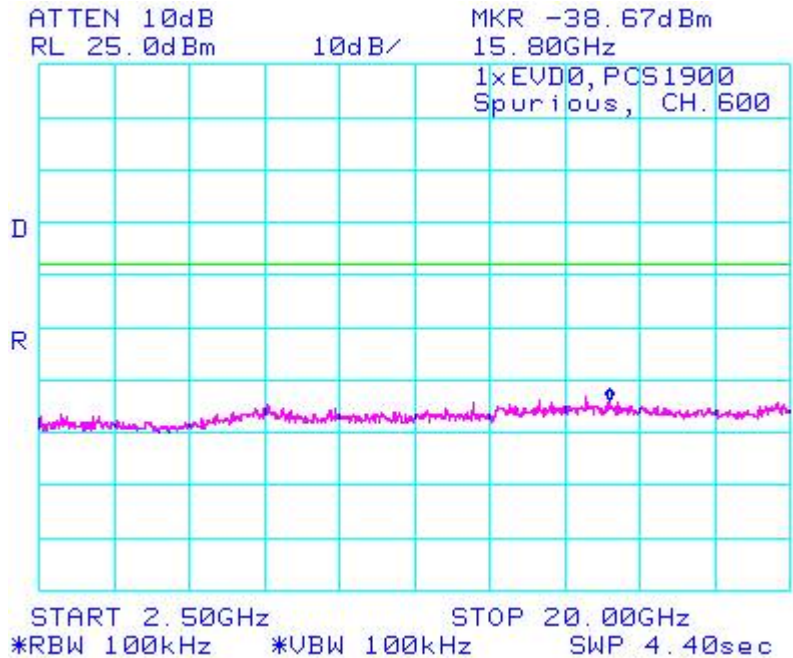

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 36: PCS, Spurious Conducted Emissions, High Channel


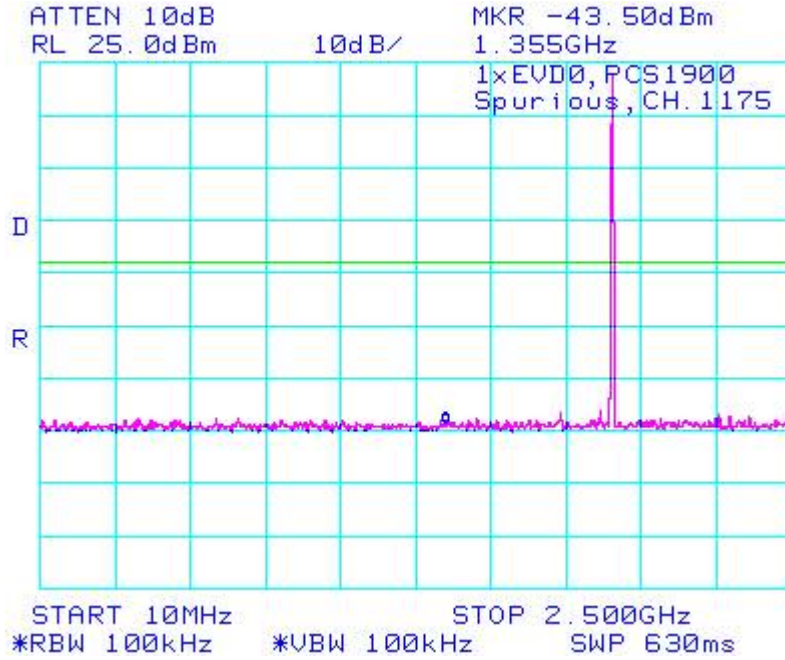



Figure 37: PCS, Spurious Conducted Emissions, High Channel

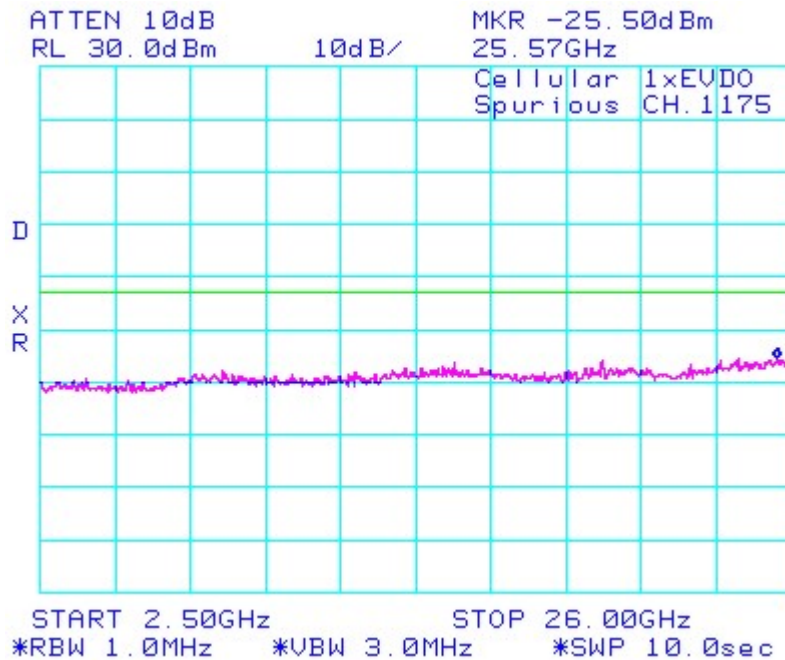

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW

Conducted Emission Test Results cont'd

Figure 38: Occupied Bandwidth, Cellular Low Channel


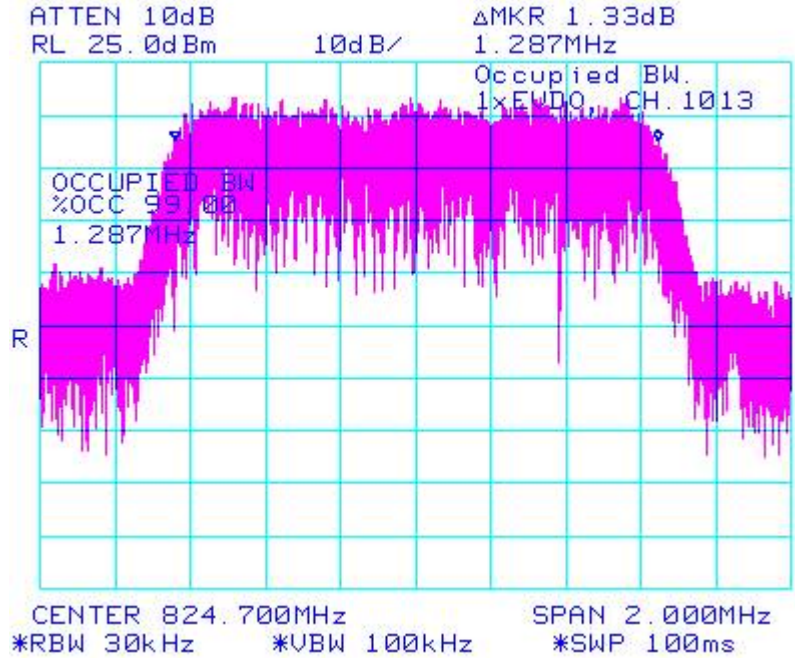



Figure 39: Occupied Bandwidth, Cellular Middle Channel

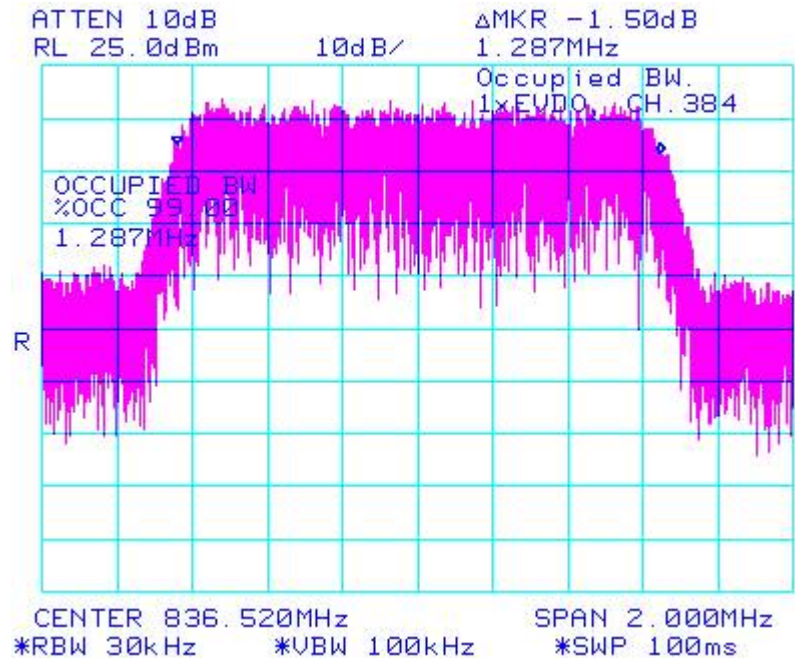

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 40: Occupied Bandwidth, Cellular High Channel


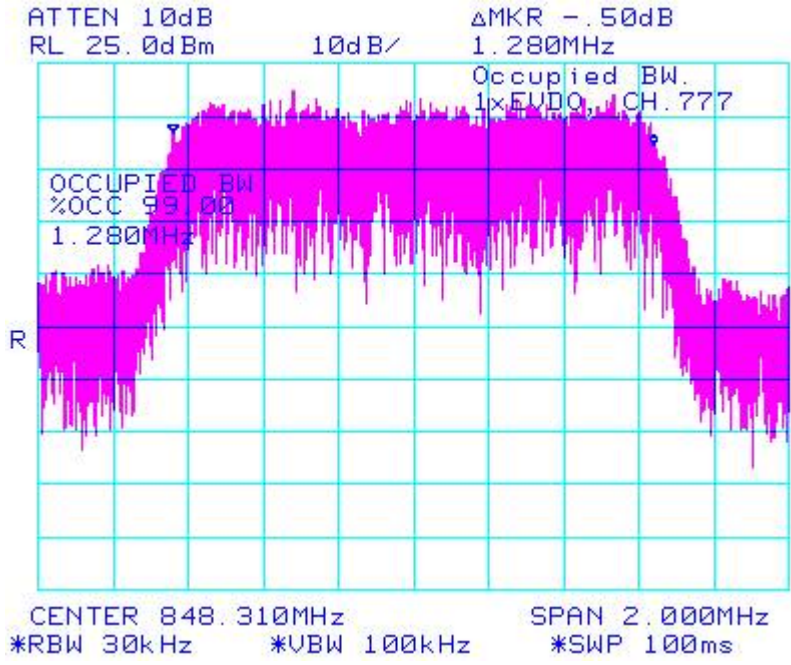


Figure 41: Occupied Bandwidth, PCS Low Channel

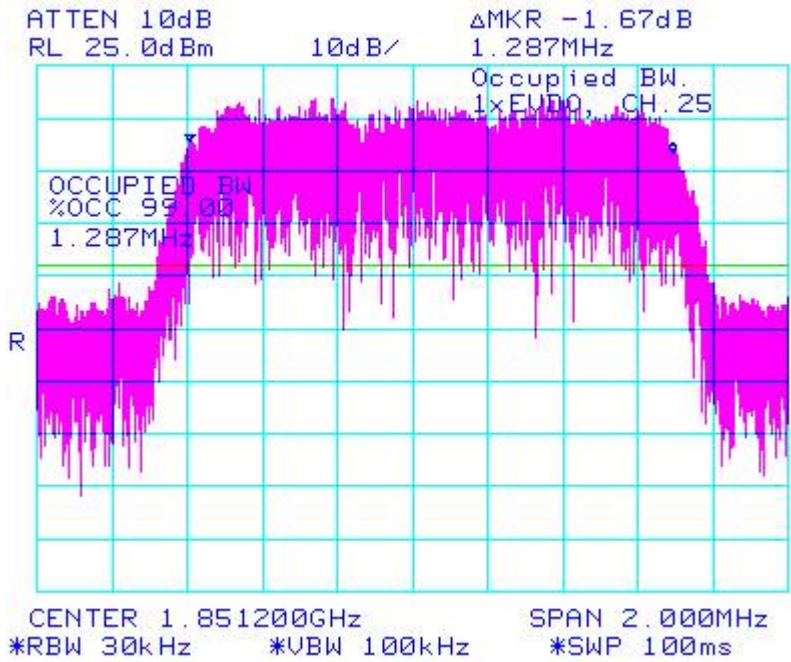

Conducted Emission Test Results cont'd

Figure 42: Occupied Bandwidth, PCS Middle Channel


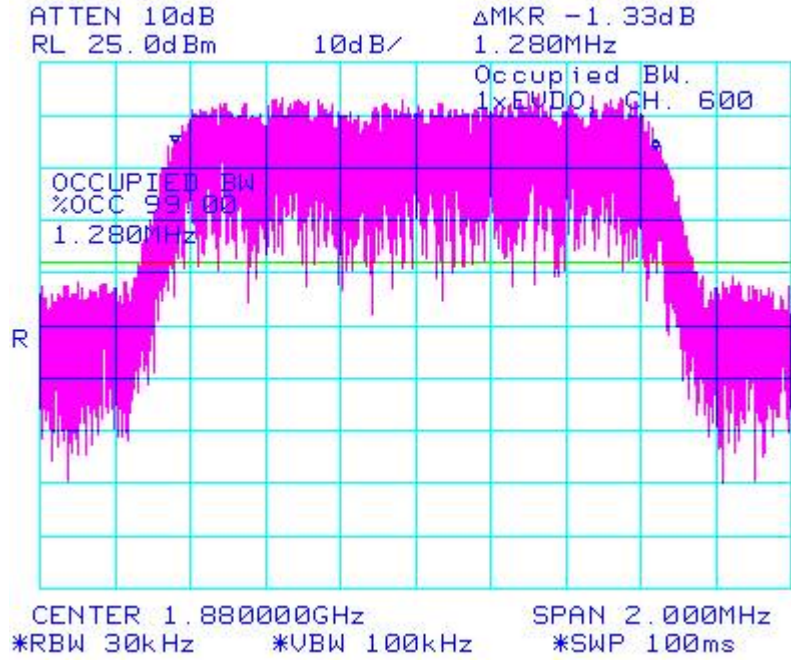



Figure 43: Occupied Bandwidth, PCS High Channel

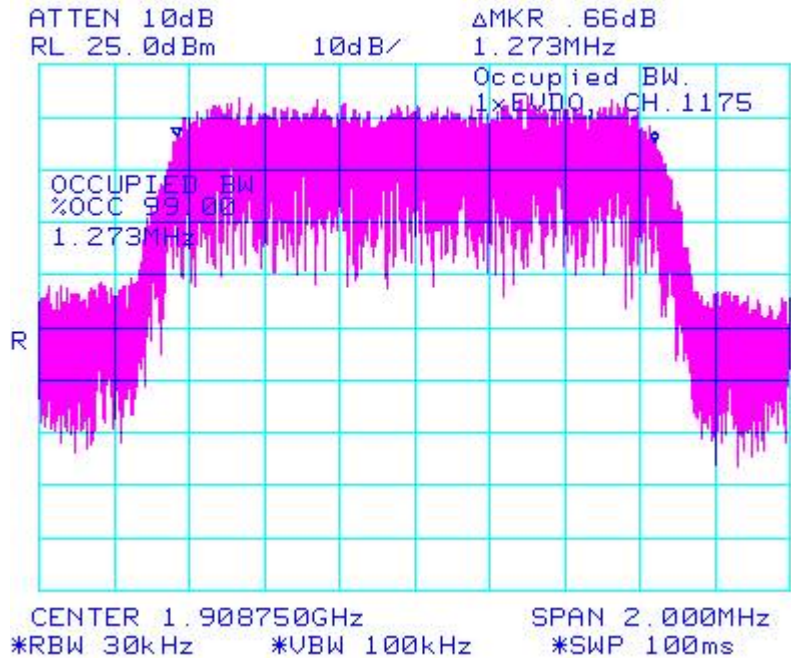

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 44a: Band Edge Compliance, Cellular 1xEVDO Low Channel

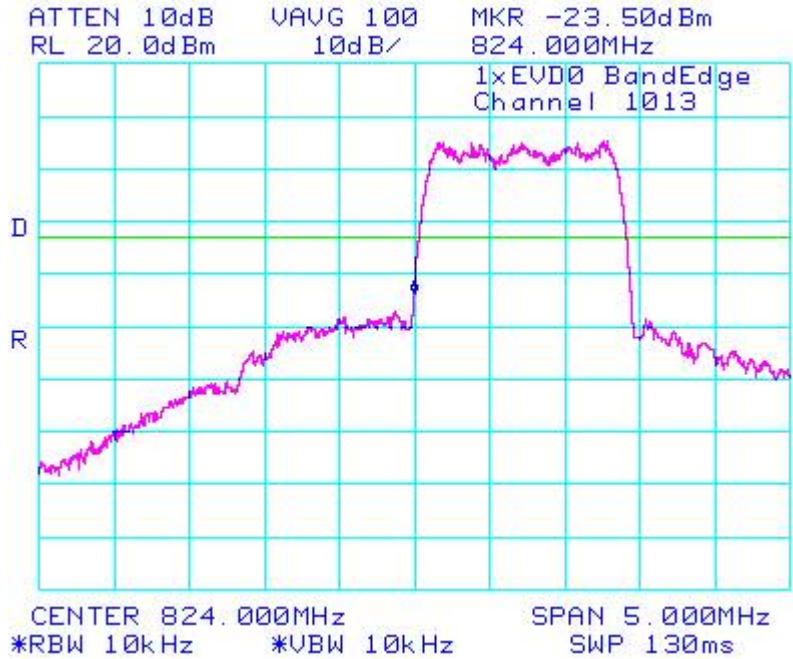



Figure 44b: Band Edge Compliance, Cellular 1xEVDO Low Channel



	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 45a: Band Edge Compliance, Cellular 1xEVDO High Channel


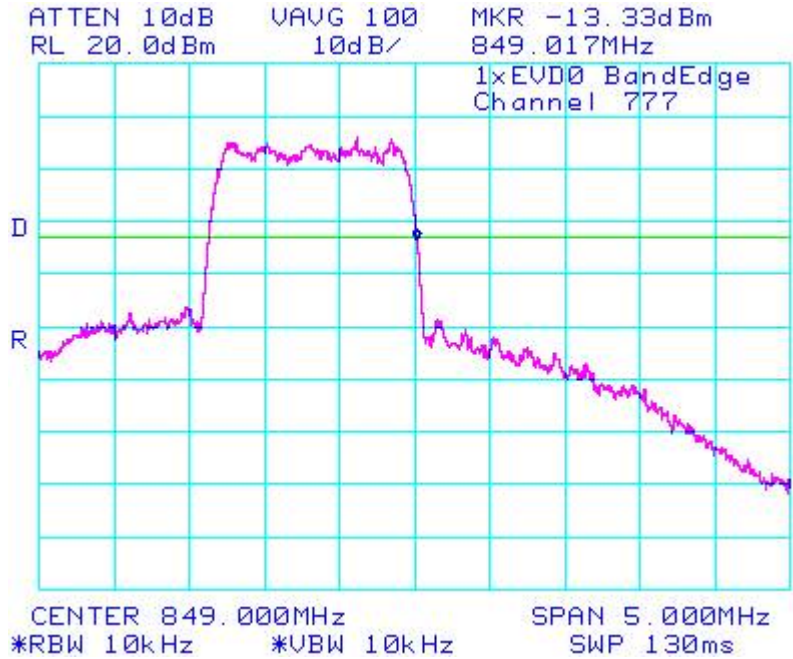



Figure 45b: Band Edge Compliance, Cellular 1xEVDO High Channel

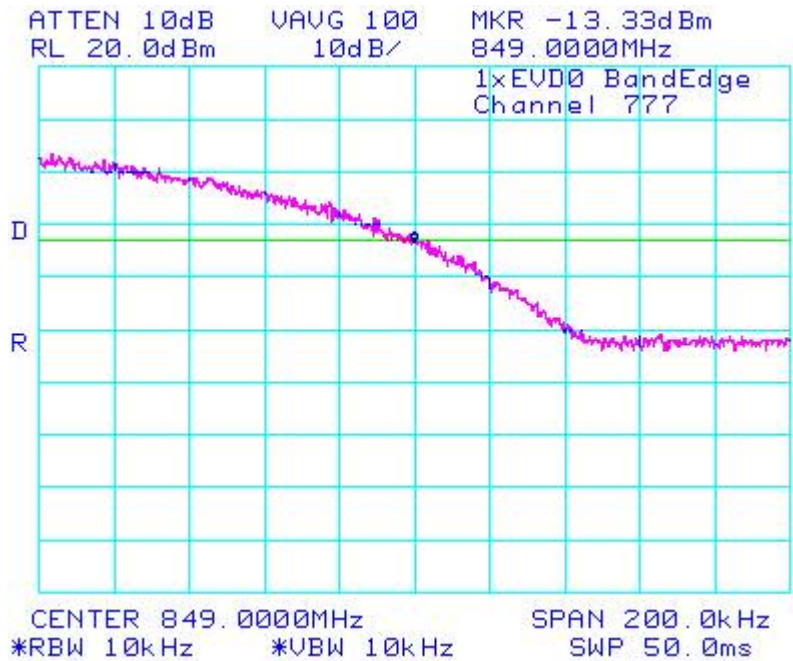

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 1	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted Emission Test Results cont'd

Figure 46: Band Edge Compliance, PCS Low Channel


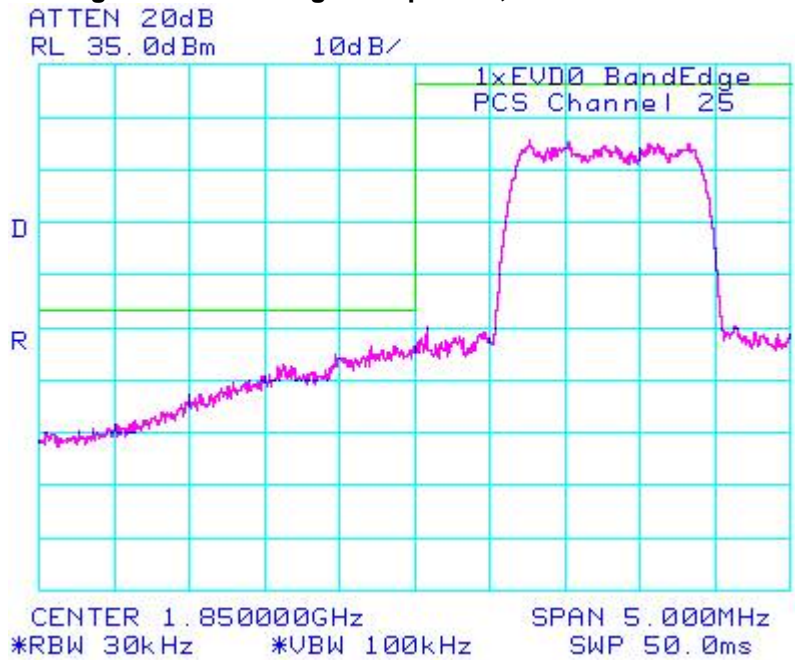



Figure 47: Band Edge Compliance, PCS High Channel

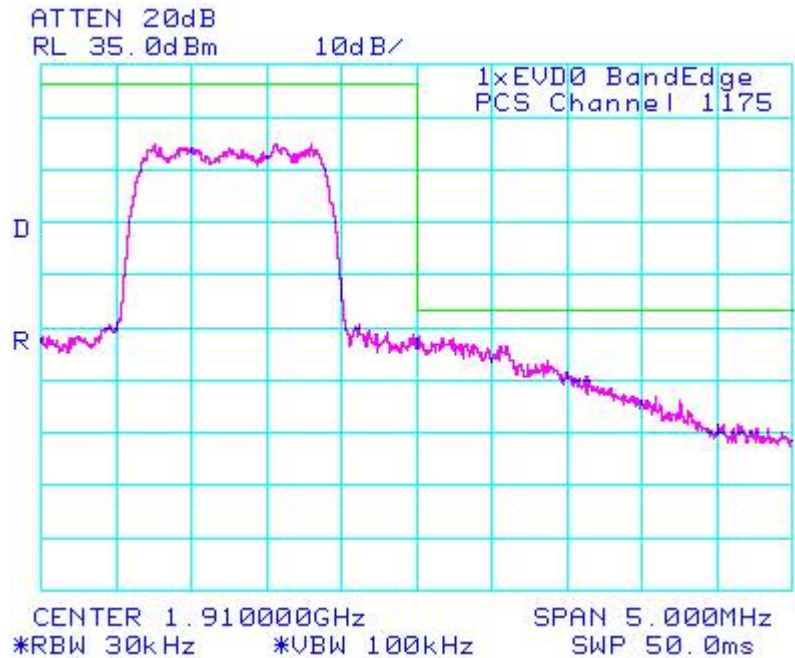

APPENDIX 2 – CONDUCTED RF OUTPUT POWER TEST DATA

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW APPENDIX 2	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Conducted RF Output Power Test Data

The measurements were performed by Daoud Attayi.

The conducted RF output power was measured using the CDMA base station simulator. Low, middle and high channels were measured at maximum radio output power at different service options and modes.

Peak nominal output power is 23.50 dBm ±0.5 dB for Cellular and 23.50 dBm ±0.5 dB for PCS.

Date of Test: September 9, 2010


The environmental test conditions were:

Temperature	24 °C
Pressure	1012 mb
Relative Humidity	32 %


Test Results

Band	Channel	1x EvDO (153.6kbps)		CDMA2000 RC	SO2 Loopback		SO55 Loopback		TDSO SO32	
		(dBm)	(Watts)		(dBm)	(Watts)	(dBm)	(Watts)	(dBm)	(Watts)
CDMA Cellular	1013	23.6	0.23	RC1	23.6	0.23	23.5	0.22	N/A	-
				RC3	23.6	0.23	23.5	0.22	23.5	0.22
	384	23.7	0.23	RC1	23.7	0.23	23.7	0.23	N/A	-
				RC3	23.6	0.23	23.6	0.23	23.6	0.23
	777	23.5	0.22	RC1	23.6	0.23	23.6	0.23	N/A	-
				RC3	23.5	0.22	23.5	0.22	23.5	0.22
Band	Channel	1x EvDO (153.6kbps)		CDMA2000 RC	SO2 Loopback		SO55 Loopback		TDSO SO32	
		(dBm)	(Watts)		(dBm)	(Watts)	(dBm)	(Watts)	(dBm)	(Watts)
CDMA PCS	25	23.6	0.23	RC1	23.6	0.23	23.8	0.24	N/A	-
				RC3	23.6	0.23	23.5	0.22	23.7	0.23
	600	23.5	0.22	RC1	23.4	0.22	23.6	0.23	N/A	-
				RC3	23.4	0.22	23.6	0.23	23.5	0.22
	1175	23.5	0.22	RC1	23.5	0.22	23.6	0.23	N/A	-
				RC3	23.4	0.22	23.5	0.22	23.5	0.22

APPENDIX 3 – FREQUENCY STABILITY TEST DATA

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 3	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW

Frequency Stability Test Data

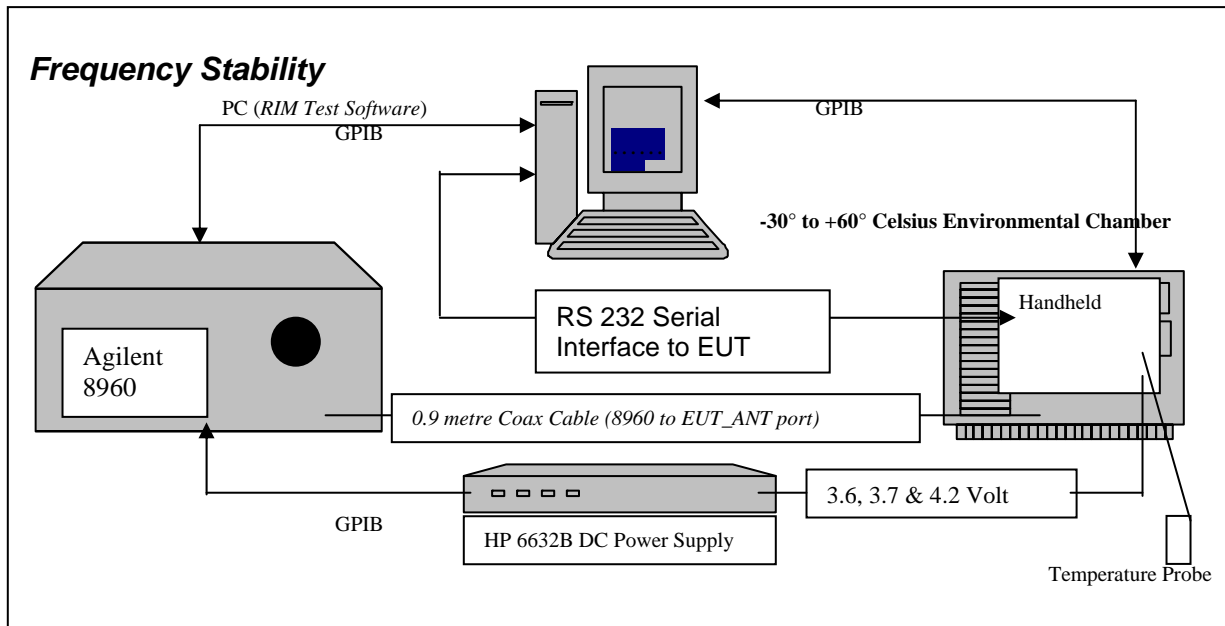

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

- 2.1055** Frequency Stability - Procedures
(a,b) Frequency Stability - Temperature Variation
(d) Frequency Stability - Voltage Variation

24.235 Frequency Stability.


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The RCU21CW BlackBerry® smartphone, (referred as EUT herein and after) transmitted frequencies are less than 0.1 ppm of the received frequency from the Agilent 8960 CDMA Base Station Simulator

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 24.235, RSS-133, CFR 47 chapter 1, Section 22.917 and RSS-132 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the base station simulator and the EUT antenna port; located inside the environmental chamber.

Calibration for the Cable Loss was performed in the RF Laboratory using the Giga-tronics power metre and Agilent Signal Generator.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 3	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

The cable assembly from the RF input to the RF output was measured at the following Frequencies:

PCS Frequency (MHz)	Cable loss (dB)
1851.20	1.10
1880.00	1.10
1908.75	1.10

Cellular Frequency (MHz)	Cable loss (dB)
824.70	0.50
836.52	0.50
848.31	0.50

Procedure:


The EUT was placed in the Temperature chamber and connected to the Agilent 8960 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the measurements were to be made.

The chamber was switched on and the temperature was set to -30°C. After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled. The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the base station simulator via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, to 3.7 volts nominal voltage to 4.2 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 3.7 volts and 4.2 volts. The transmit frequency was varied in 3 steps consisting of 824.70, 836.52, and 848.31 MHz for the cellular band and 1851.20, 1880.00 and 1908.75 MHz for the PCS band. This frequency was recorded in MHz and deviation from nominal, in Parts per Million. After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 3	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

PROCEDURE:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.


1. Switch on the HP 6632B power supply; AGILENT 8960, and Environmental Chamber.
2. Start test program
3. Set the Temperature to -30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.6 volts.
5. Set up base station simulator.
6. Command the base station simulator to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the base station simulator.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the base station simulator, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power, Frequency Error.
10. The base station simulator commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
11. Repeat steps 5 to 10 changing the supply voltage to 3.7 Volts
12. Increase temperature by 10°C and soak for 1/2 hour.
13. Repeat steps 4 - 12 for temperatures -30°C to 60°C .
14. Repeat steps 5 to 10 changing the supply voltage to 4.2 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.7 and 4.2 volts.

The maximum frequency error in the Cellular band measured was **0.0039 PPM**.
The maximum frequency error in the PCS band measured was **0.0083 PPM**.

Date of test: August 12, 2010

The measurements were performed by Maurice Battler.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 3	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Cellular Channel results: channels 1013, 384 and 777 @ 20°C maximum transmitted power

Traffic Channel Number	Cellular Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1013	824.700	3.6	20	0.73	0.0009
384	836.520	3.6	20	0.84	0.0010
777	848.310	3.6	20	-0.01	0.0000

Traffic Channel Number	Cellular Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1013	824.700	3.7	20	-0.69	-0.0008
384	836.520	3.7	20	0.37	0.0004
777	848.310	3.7	20	-0.27	-0.0003

Traffic Channel Number	Cellular Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1013	824.700	4.2	20	-0.92	-0.0011
384	836.520	4.2	20	-1.42	-0.0017
777	848.310	4.2	20	-0.44	-0.0005

Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW
--	--	---

Cellular Results: channel 1013 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1013	824.70	3.6	-30	0.01	0.0000
1013	824.70	3.6	-20	0.02	0.0000
1013	824.70	3.6	-10	-0.45	-0.0005
1013	824.70	3.6	0	1.03	0.0013
1013	824.70	3.6	10	2.19	0.0026
1013	824.70	3.6	20	0.73	0.0009
1013	824.70	3.6	30	-0.81	-0.0010
1013	824.70	3.6	40	-1.37	-0.0017
1013	824.70	3.6	50	-1.19	-0.0014
1013	824.70	3.6	60	-0.63	-0.0008

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1013	824.70	3.7	-30	-0.80	-0.0010
1013	824.70	3.7	-20	0.54	0.0007
1013	824.70	3.7	-10	-2.09	-0.0025
1013	824.70	3.7	0	0.37	0.0004
1013	824.70	3.7	10	0.93	0.0011
1013	824.70	3.7	20	-0.69	-0.0008
1013	824.70	3.7	30	-1.21	-0.0015
1013	824.70	3.7	40	-1.22	-0.0015
1013	824.70	3.7	50	-1.26	-0.0015
1013	824.70	3.7	60	0.51	0.0006

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1013	824.700	4.2	-30	-0.65	-0.0008
1013	824.700	4.2	-20	-0.04	0.0000
1013	824.700	4.2	-10	-1.10	-0.0013
1013	824.700	4.2	0	0.16	0.0002
1013	824.700	4.2	10	0.58	0.0007
1013	824.700	4.2	20	-0.92	-0.0011
1013	824.700	4.2	30	-1.43	-0.0017
1013	824.700	4.2	40	-0.71	-0.0009
1013	824.700	4.2	50	-1.29	-0.0016
1013	824.700	4.2	60	-0.02	0.0000

Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW
--	--	---

Cellular Results: channel 384 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
384	836.520	3.6	-30	0.34	0.0004
384	836.520	3.6	-20	2.03	0.0024
384	836.520	3.6	-10	-1.15	-0.0014
384	836.520	3.6	0	2.71	0.0032
384	836.520	3.6	10	3.27	0.0039
384	836.520	3.6	20	0.84	0.0010
384	836.520	3.6	30	-0.77	-0.0009
384	836.520	3.6	40	-1.16	-0.0014
384	836.520	3.6	50	-1.20	-0.0014
384	836.520	3.6	60	1.20	0.0014

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
384	836.520	3.7	-30	-0.59	-0.0007
384	836.520	3.7	-20	0.31	0.0004
384	836.520	3.7	-10	-1.88	-0.0023
384	836.520	3.7	0	0.96	0.0011
384	836.520	3.7	10	1.02	0.0012
384	836.520	3.7	20	0.37	0.0004
384	836.520	3.7	30	-1.67	-0.0020
384	836.520	3.7	40	-1.86	-0.0022
384	836.520	3.7	50	-1.34	-0.0016
384	836.520	3.7	60	1.03	0.0012

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
384	836.520	4.2	-30	-0.86	-0.0010
384	836.520	4.2	-20	0.60	0.0007
384	836.520	4.2	-10	-1.43	-0.0017
384	836.520	4.2	0	1.25	0.0015
384	836.520	4.2	10	0.25	0.0003
384	836.520	4.2	20	-1.42	-0.0017
384	836.520	4.2	30	-0.89	-0.0011
384	836.520	4.2	40	-1.31	-0.0016
384	836.520	4.2	50	-0.86	-0.0010
384	836.520	4.2	60	0.55	0.0007


Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW
--	--	---

Cellular Results: channel 777 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
777	848.310	3.6	-30	-0.16	-0.0002
777	848.310	3.6	-20	0.50	0.0006
777	848.310	3.6	-10	-1.67	-0.0020
777	848.310	3.6	0	0.62	0.0007
777	848.310	3.6	10	1.69	0.0020
777	848.310	3.6	20	-0.01	0.0000
777	848.310	3.6	30	-1.02	-0.0012
777	848.310	3.6	40	-1.17	-0.0014
777	848.310	3.6	50	-1.51	-0.0018
777	848.310	3.6	60	1.16	0.0014

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
777	848.310	3.7	-30	-0.29	-0.0003
777	848.310	3.7	-20	0.19	0.0002
777	848.310	3.7	-10	-1.35	-0.0016
777	848.310	3.7	0	0.48	0.0006
777	848.310	3.7	10	0.82	0.0010
777	848.310	3.7	20	-0.27	-0.0003
777	848.310	3.7	30	-0.94	-0.0011
777	848.310	3.7	40	-1.02	-0.0012
777	848.310	3.7	50	-1.12	-0.0013
777	848.310	3.7	60	0.97	0.0011

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
777	848.310	4.2	-30	0.01	0.0000
777	848.310	4.2	-20	0.10	0.0001
777	848.310	4.2	-10	-1.22	-0.0014
777	848.310	4.2	0	0.28	0.0003
777	848.310	4.2	10	0.36	0.0004
777	848.310	4.2	20	-0.44	-0.0005
777	848.310	4.2	30	-0.64	-0.0008
777	848.310	4.2	40	-0.89	-0.0010
777	848.310	4.2	50	-0.95	-0.0011
777	848.310	4.2	60	0.38	0.0005

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 3	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

PCS Channel results: channels 25, 600, & 1175 @ 20°C maximum transmitted power

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
25	1851.20	3.6	20	-0.39	-0.0002
600	1880.00	3.6	20	4.64	0.0025
1175	1908.75	3.6	20	1.25	0.0007

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
25	1851.20	3.7	20	0.63	0.0003
600	1880.00	3.7	20	-2.03	-0.0011
1175	1908.75	3.7	20	-1.55	-0.0008

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
25	1851.20	4.2	20	-0.31	-0.0002
600	1880.00	4.2	20	-2.31	-0.0012
1175	1908.75	4.2	20	-2.72	-0.0014

Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW
--	--	---

PCS Results: channel 25 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
25	1851.20	3.6	-30	-5.34	-0.0029
25	1851.20	3.6	-20	-7.64	-0.0041
25	1851.20	3.6	-10	-3.78	-0.0020
25	1851.20	3.6	0	-1.17	-0.0006
25	1851.20	3.6	10	2.76	0.0015
25	1851.20	3.6	20	-0.39	-0.0002
25	1851.20	3.6	30	-3.43	-0.0019
25	1851.20	3.6	40	-4.97	-0.0027
25	1851.20	3.6	50	-7.43	-0.0040
25	1851.20	3.6	60	-3.55	-0.0019

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
25	1851.20	3.7	-30	2.81	0.0015
25	1851.20	3.7	-20	7.68	0.0041
25	1851.20	3.7	-10	-5.99	-0.0032
25	1851.20	3.7	0	4.86	0.0026
25	1851.20	3.7	10	5.98	0.0032
25	1851.20	3.7	20	0.63	0.0003
25	1851.20	3.7	30	-5.00	-0.0027
25	1851.20	3.7	40	-3.98	-0.0022
25	1851.20	3.7	50	-3.99	-0.0022
25	1851.20	3.7	60	3.17	0.0017

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
25	1851.20	4.2	-30	3.27	0.0018
25	1851.20	4.2	-20	3.27	0.0018
25	1851.20	4.2	-10	-5.21	-0.0028
25	1851.20	4.2	0	4.84	0.0026
25	1851.20	4.2	10	4.71	0.0025
25	1851.20	4.2	20	-0.31	-0.0002
25	1851.20	4.2	30	-3.86	-0.0021
25	1851.20	4.2	40	-3.98	-0.0022
25	1851.20	4.2	50	-3.05	-0.0016
25	1851.20	4.2	60	3.46	0.0019

Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW
--	--	---

PCS Results: channel 600 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
600	1880.00	3.6	-30	-1.12	-0.0006
600	1880.00	3.6	-20	15.69	0.0083
600	1880.00	3.6	-10	-2.55	-0.0014
600	1880.00	3.6	0	6.61	0.0035
600	1880.00	3.6	10	11.20	0.0060
600	1880.00	3.6	20	4.64	0.0025
600	1880.00	3.6	30	-2.97	-0.0016
600	1880.00	3.6	40	-4.01	-0.0021
600	1880.00	3.6	50	-3.94	-0.0021
600	1880.00	3.6	60	4.29	0.0023

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
600	1880.00	3.7	-30	-1.80	-0.0010
600	1880.00	3.7	-20	5.74	0.0031
600	1880.00	3.7	-10	-6.27	-0.0033
600	1880.00	3.7	0	2.27	0.0012
600	1880.00	3.7	10	1.84	0.0010
600	1880.00	3.7	20	-2.03	-0.0011
600	1880.00	3.7	30	-6.29	-0.0033
600	1880.00	3.7	40	-6.09	-0.0032
600	1880.00	3.7	50	-5.78	-0.0031
600	1880.00	3.7	60	1.03	0.0005

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
600	1880.00	4.2	-30	0.99	0.0005
600	1880.00	4.2	-20	2.69	0.0014
600	1880.00	4.2	-10	-6.31	-0.0034
600	1880.00	4.2	0	2.13	0.0011
600	1880.00	4.2	10	2.73	0.0015
600	1880.00	4.2	20	-2.31	-0.0012
600	1880.00	4.2	30	-5.05	-0.0027
600	1880.00	4.2	40	-9.25	-0.0049
600	1880.00	4.2	50	-4.75	-0.0025
600	1880.00	4.2	60	1.17	0.0006

Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW
--	--	---


PCS Results: channel 1175 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1175	1908.75	3.6	-30	-2.63	-0.0014
1175	1908.75	3.6	-20	9.56	0.0050
1175	1908.75	3.6	-10	-6.65	-0.0035
1175	1908.75	3.6	0	3.82	0.0020
1175	1908.75	3.6	10	7.29	0.0038
1175	1908.75	3.6	20	1.25	0.0007
1175	1908.75	3.6	30	-4.69	-0.0025
1175	1908.75	3.6	40	-5.29	-0.0028
1175	1908.75	3.6	50	-4.23	-0.0022
1175	1908.75	3.6	60	3.11	0.0016

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1175	1908.75	3.7	-30	-1.13	-0.0006
1175	1908.75	3.7	-20	3.81	0.0020
1175	1908.75	3.7	-10	-5.29	-0.0028
1175	1908.75	3.7	0	2.17	0.0011
1175	1908.75	3.7	10	3.31	0.0017
1175	1908.75	3.7	20	-1.55	-0.0008
1175	1908.75	3.7	30	-5.73	-0.0030
1175	1908.75	3.7	40	-6.59	-0.0035
1175	1908.75	3.7	50	-5.58	-0.0029
1175	1908.75	3.7	60	0.02	0.0000

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1175	1908.75	4.2	-30	-0.18	-0.0001
1175	1908.75	4.2	-20	-0.06	0.0000
1175	1908.75	4.2	-10	-5.14	-0.0027
1175	1908.75	4.2	0	2.84	0.0015
1175	1908.75	4.2	10	1.76	0.0009
1175	1908.75	4.2	20	-2.72	-0.0014
1175	1908.75	4.2	30	-5.13	-0.0027
1175	1908.75	4.2	40	-7.77	-0.0041
1175	1908.75	4.2	50	-4.82	-0.0025
1175	1908.75	4.2	60	1.71	0.0009

APPENDIX 4 - RADIATED EMISSIONS TEST DATA

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Radiated Power Test Data Results

The following measurements were performed by Kevin Rose.

Date of tests: September 9, 2010

The environmental tests conditions were: Temperature: 22 °C
 Pressure: 1012 mb
 Relative Humidity: 32 %


Cellular Band

Loopback Service

The BlackBerry® smartphone was in standalone, USB down position.

Test distance is 3.0 metres

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Tracking Generator		Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
								Pol.	Reading (dBm)	(dBm)	(W)		
F0	1013	824.70	800	Dipole	V	73.25	82.2	V-V	9.90	25.04	0.32	39.00	-13.96
F0	1013	824.70	800	Dipole	H	82.2		H-H	8.17				
F0	384	836.52	800	Dipole	V	74.12	82.95	V-V	10.90	25.94	0.39	39.00	-13.06
F0	384	836.52	800	Dipole	H	82.95		H-H	9.02				
F0	777	848.31	800	Dipole	V	72.89	82.83	V-V	10.20	25.23	0.33	39.00	-13.77
F0	777	848.31	800	Dipole	H	82.83		H-H	8.26				

		EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW	


Radiated Power Test Data Results cont'd

Cellular Band

1xEVDO

The BlackBerry® smartphone was in standalone, horizontal face down position.
Test Distance was 3.0 metres.

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Tracking Generator		Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
								Pol.	Reading (dBm)	(dBm)	(W)		
F0	1013	824.70	800	Dipole	V	73.53	84.00	V-V	11.67	26.81	0.48	39.00	-12.2
F0	1013	824.70	800	Dipole	H	84.00		H-H	9.68				
F0	384	836.52	800	Dipole	V	69.88	83.32	V-V	11.33	26.37	0.43	39.00	-12.6
F0	384	836.52	800	Dipole	H	83.32		H-H	10.14				
F0	777	848.31	800	Dipole	V	72.41	82.55	V-V	10.30	25.33	0.34	39.00	-13.7
F0	777	848.31	800	Dipole	H	82.55		H-H	8.55				

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010


Radiated Power Test Data Results cont'd

PCS Band

Loopback Service

The BlackBerry® smartphone was in standalone, USB down position.
Test Distance was 3.0 metres.

							Substitution Method						
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) dBuV	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)		Limit (dBm)	Diff to Limit (dB)
										(dBm)	(W)		
F0	25	1851.25	1900	Horn	V	84.17	84.17	V-V	-14.67	22.64	0.18	33.00	-10.36
F0	25	1851.25	1900	Horn	H	84.17		H-H	-13.54				
F0	600	1880.00	1900	Horn	V	84.58	84.58	V-V	-13.73	22.84	0.19	33.00	-10.16
F0	600	1880.00	1900	Horn	H	81.52		H-H	-12.93				
F0	1175	1908.75	1900	Horn	V	83.76	84.65	V-V	-13.67	22.69	0.19	33.00	-10.31
F0	1175	1908.75	1900	Horn	H	84.65		H-H	-13.03				

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010


Radiated Power Test Data Results cont'd

PCS Band

1xEVDO

The BlackBerry® smartphone was in standalone, horizontal face down position.
Test Distance was 3.0 metres.

								Substitution Method					
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) dBuV	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)		Limit (dBm)	Diff to Limit (dB)
										(dBm)	(W)		
F0	25	1851.25	1900	Horn	V	87.68	87.68	V-V	-11.16	26.15	0.41	33.00	-6.85
F0	25	1851.25	1900	Horn	H	81.39		H-H	-10.03				
F0	600	1880.00	1900	Horn	V	87.18	87.18	V-V	-11.11	25.46	0.35	33.00	-7.54
F0	600	1880.00	1900	Horn	H	81.01		H-H	-10.31				
F0	1175	1908.75	1900	Horn	V	86.92	86.92	V-V	-10.84	25.52	0.36	33.00	-7.48
F0	1175	1908.75	1900	Horn	H	82.14		H-H	-10.20				

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Radiated Emissions Test Data Results

Cellular Band

Loopback

Date of Test: Date of tests: August 10, 2010

The environmental test conditions were: Temperature: 24 °C
Pressure: 1010 mb
Relative Humidity: 30 %

Test Distance was 3.0 metres with a height of 1.0 metres, 30 MHz to 1000 MHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in Cellular Tx mode on channels 384.

All emissions had a test margin greater than 25.0 dB.

Date of Test: Date of tests: August 10, 2010


The environmental test conditions were: Temperature: 25 °C
Pressure: 1009 mb
Relative Humidity: 31 %

Test Distance was 3.0 metres with a height of 1.0 metres, 1 GHz to 9 GHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in CDMA Cellular Tx mode on channels 384.

All emissions, including harmonics, had a test margin greater than 25.0 dB.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Radiated Emissions Test Data Results cont'd

Cellular Band

Test Data

Date of Test: Date of tests: August 10, 2010

The environmental test conditions were: Temperature: 24 °C
Pressure: 1010 mb
Relative Humidity: 30 %

Test Distance was 3.0 metres with a height of 1.0 metres, 30 MHz to 1000 MHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in Cellular Tx mode on channels 777.

All emissions had a test margin greater than 25.0 dB.

Date of Test: Date of tests: August 10, 2010


The environmental test conditions were: Temperature: 25 °C
Pressure: 1009 mb
Relative Humidity: 31 %

Test Distance was 3.0 metres with a height of 1.0 metres, 1 GHz to 9 GHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in CDMA Cellular Tx mode on channels 777.

All emissions, including harmonics, had a test margin greater than 25.0 dB.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Radiated Emissions Test Data Results cont'd

Cellular Band

1xEVDO

Date of Test: Date of tests: August 10, 2010

The environmental test conditions were: Temperature: 24 °C
Pressure: 1010 mb
Relative Humidity: 30 %

Test Distance was 3.0 metres with a height of 1.0 metres, 30 MHz to 1000 MHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in Cellular Tx mode on channels 384.

All emissions had a test margin greater than 25.0 dB.

Date of Test: Date of tests: August 10, 2010


The environmental test conditions were: Temperature: 25 °C
Pressure: 1009 mb
Relative Humidity: 31 %

Test Distance was 3.0 metres with a height of 1.0 metres, 1 GHz to 9 GHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in CDMA Cellular Tx mode on channels 384.

All emissions, including harmonics, had a test margin greater than 25.0 dB.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010	FCC ID: L6ARCL20CW IC: 2503A-RCL20CW

Radiated Emissions Test Data Results cont'd

PCS Band

Loopback

Date of Test: Date of tests: August 10, 2010

The environmental test conditions were: Temperature: 24 °C
Pressure: 1010 mb
Relative Humidity: 30 %

Test Distance was 3.0 metres with a height of 1.0 metres, 30 MHz to 1000 MHz.

The BlackBerry® smartphone was in standalone, vertical position.

The following measurements were performed in PCS Tx mode on channels 600.

All emissions had a test margin greater than 25.0 dB.

Date of Test: Date of tests: August 10, 2010


The environmental test conditions were: Temperature: 25 °C
Pressure: 1009 mb
Relative Humidity: 31 %

Test Distance was 3.0 metres with a height of 1.0 metres, 1 GHz to 20 GHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in PCS Tx mode on channels 600.

All other emissions, including harmonics, had a test margin greater than 25.0 dB.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Radiated Emissions Test Data Results cont'd

PCS Band

Test Data

Date of Test: Date of tests: August 10, 2010

The environmental test conditions were: Temperature: 24 °C
Pressure: 1010 mb
Relative Humidity: 30 %

Test Distance was 3.0 metres with a height of 1.0 metres, 30 MHz to 1000 MHz.

The BlackBerry® smartphone was in standalone, vertical position.

The following measurements were performed in PCS Tx mode on channels 600.

All emissions had a test margin greater than 25.0 dB.

Date of Test: Date of tests: August 10, 2010


The environmental test conditions were: Temperature: 25 °C
Pressure: 1009 mb
Relative Humidity: 31 %

Test Distance was 3.0 metres with a height of 1.0 metres, 1 GHz to 20 GHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in PCS Tx mode on channels 600.

All other emissions, including harmonics, had a test margin greater than 25.0 dB.

	EMI Test Report for the BlackBerry® smartphone Model RCL22CW Appendix 4	
	Test Report No. RTS-2068-1009-16	Dates of Test August 10 to September 9, 2010

Radiated Emissions Test Data Results cont'd

PCS Band

1xEVDO

Date of Test: Date of tests: August 10, 2010

The environmental test conditions were: Temperature: 24 °C
Pressure: 1008 mb
Relative Humidity: 30 %

Test Distance was 3.0 metres with a height of 1.0 metres, 30 MHz to 1000 MHz.

The BlackBerry® smartphone was in standalone, vertical position.

The following measurements were performed in PCS Tx mode on channels 25.

All emissions had a test margin greater than 25.0 dB.

Date of Test: Date of tests: August 12, 2010

The environmental test conditions were: Temperature: 25 °C
Pressure: 1007 mb
Relative Humidity: 31 %

Test Distance was 3.0 metres with a height of 1.0 metres, 1 GHz to 20 GHz.

The BlackBerry® smartphone was in standalone, Vertical position.

The following measurements were performed in PCS Tx mode on channels 25.

All other emissions, including harmonics, had a test margin greater than 25.0 dB.