
	Document <b>Appendix A for the BlackBerry® Smartphone Model RCW41GW</b> <b>SAR Report</b>			Page <b>1(9)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>Mar 15 – Apr 26, 2010</b>	Test Report No <b>RTS-2341-1004-61</b>	FCC ID: <b>L6ARCW40GW</b>

**APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION**

	Document			Page
	<b>Appendix A for the BlackBerry® Smartphone Model RCW41GW SAR Report</b>			<b>2(9)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
<b>Andrew Becker</b>	<b>Mar 15 – Apr 26, 2010</b>	<b>RTS-2341-1004-61</b>	<b>L6ARCW40GW</b>	<b>2503A-RCW40GW</b>

Date/Time: 4/22/2010 10:04:22 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[DipoleValidation\\_835MHz\\_Amb\\_Tem\\_23.1\\_Liq\\_Tem\\_21.8C\\_04\\_22\\_10.da4](#)

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446**

**Program Name: System Performance Check at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.931 \text{ mho/m}$ ;  $\epsilon_r = 39.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0:** Measurement

grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 107.9 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 14.5 W/kg



**SAR(1 g) = 9.84 mW/g; SAR(10 g) = 6.46 mW/g**

Maximum value of SAR (measured) = 10.6 mW/g


**d=15mm, Pin=1000mW/Area Scan (31x121x1):** Measurement grid:  $dx=15\text{mm}$ ,

$dy=15\text{mm}$

Maximum value of SAR (interpolated) = 10.7 mW/g

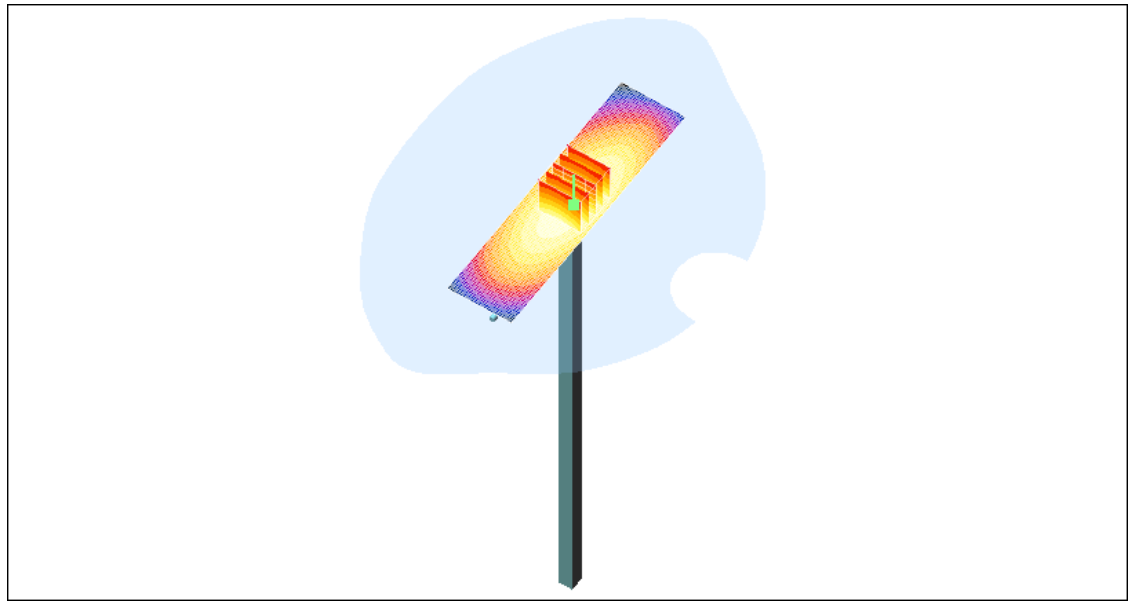

0 dB = 10.7mW/g

	Document			Page
	<b>Appendix A for the BlackBerry® Smartphone Model RCW41GW SAR Report</b>			<b>4(9)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
<b>Andrew Becker</b>	<b>Mar 15 – Apr 26, 2010</b>	<b>RTS-2341-1004-61</b>	<b>L6ARCW40GW</b>	<b>2503A-RCW40GW</b>

Date/Time: 4/26/2010 8:05:12 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[DipoleValidation\\_835MHz\\_Amb\\_Tem\\_22.9\\_Liq\\_Tem\\_22.4C\\_04\\_26\\_10.da4](#)

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446**  
**Program Name: System Performance Check at 835 MHz**



Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.903 \text{ mho/m}$ ;  $\epsilon_r = 42.5$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 106.0 V/m; Power Drift = -0.043 dB  
Peak SAR (extrapolated) = 13.4 W/kg  
**SAR(1 g) = 9.16 mW/g; SAR(10 g) = 6.02 mW/g**  
Maximum value of SAR (measured) = 9.92 mW/g

**d=15mm, Pin=1000mW/Area Scan (31x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (interpolated) = 9.91 mW/g

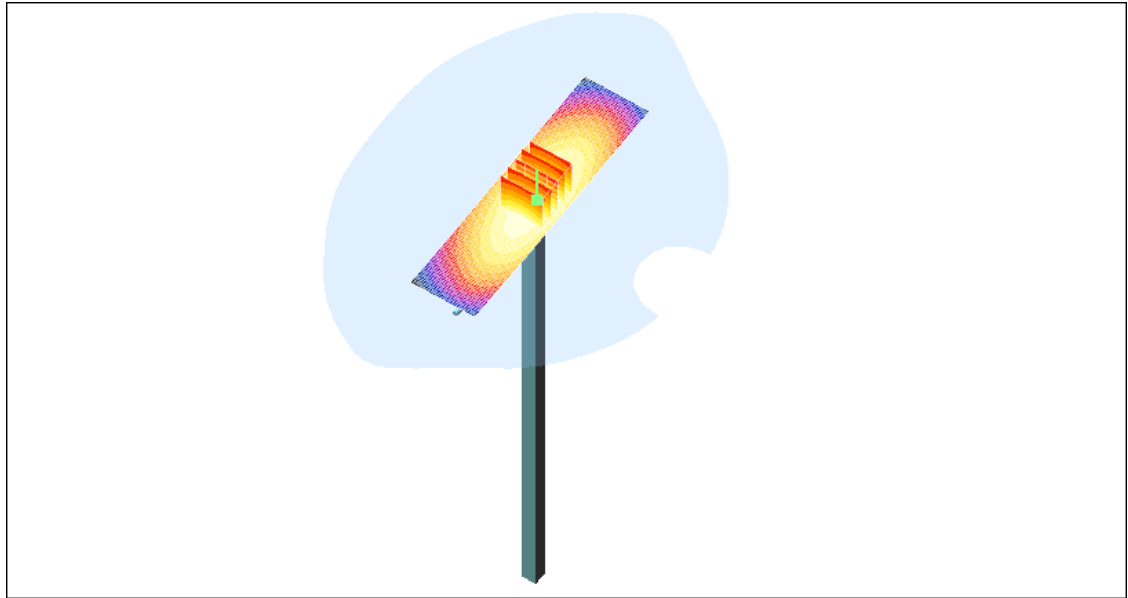

0 dB = 9.91mW/g

	Document			Page
	<b>Appendix A for the BlackBerry® Smartphone Model RCW41GW</b> <b>SAR Report</b>			<b>6(9)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
<b>Andrew Becker</b>	<b>Mar 15 – Apr 26, 2010</b>	<b>RTS-2341-1004-61</b>	<b>L6ARCW40GW</b>	<b>2503A-RCW40GW</b>

Date/Time: 3/24/2010 8:39:21 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[DipoleValidation 1900MHz Amb Tem 22.7 Liq Tem 22.3 C 03 24 10.da4](#)

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545**

**Program Name: System Performance Check at 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement**

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 180.3 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 76.9 W/kg


**SAR(1 g) = 40.9 mW/g; SAR(10 g) = 21 mW/g**

Maximum value of SAR (measured) = 46.2 mW/g


**d=15mm, Pin=1000mW/Area Scan (31x61x1): Measurement grid: dx=15mm,**

dy=15mm

Maximum value of SAR (interpolated) = 46.4 mW/g

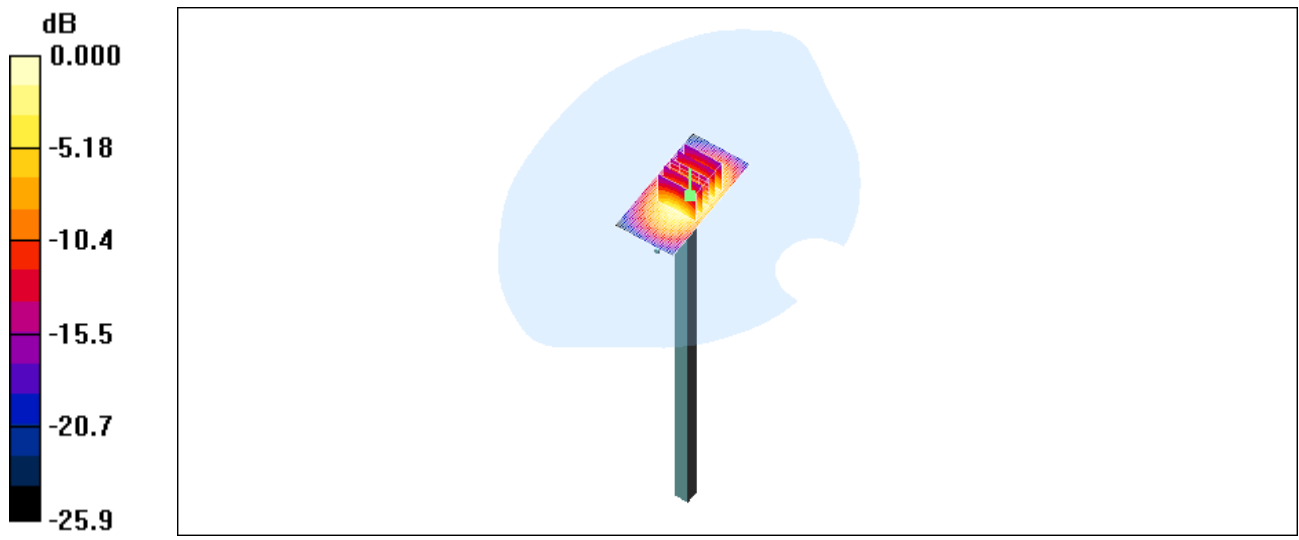

0 dB = 46.4mW/g

	Document			Page
	<b>Appendix A for the BlackBerry® Smartphone Model RCW41GW SAR Report</b>			<b>8(9)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
<b>Andrew Becker</b>	<b>Mar 15 – Apr 26, 2010</b>	<b>RTS-2341-1004-61</b>	<b>L6ARCW40GW</b>	<b>2503A-RCW40GW</b>

Date/Time: 3/15/2010 11:55:17 AM

File Name: [DipoleValidation 2450MHz Amb Tem 23.0 Liq Tem 21.2C.da4](#)

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:747**  
**Program Name: System Performance Check at 2450 MHz**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 37.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section



DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.5, 4.5, 4.5); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 185.2 V/m; Power Drift = 0.023 dB  
Peak SAR (extrapolated) = 130.5 W/kg  
**SAR(1 g) = 57.2 mW/g; SAR(10 g) = 26.1 mW/g**  
Maximum value of SAR (measured) = 63.7 mW/g

**d=10mm, Pin=1000mW/Area Scan (31x41x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 64.2 mW/g



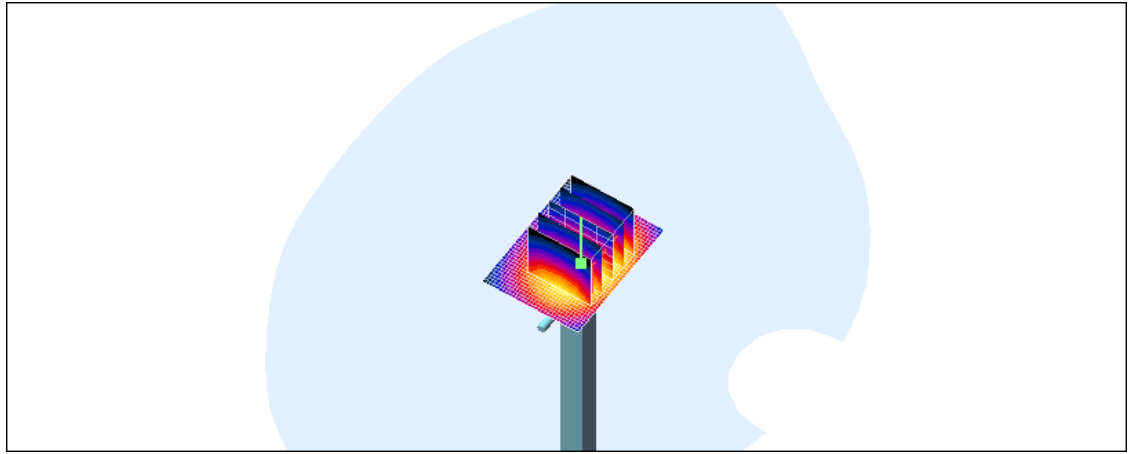

0 dB = 64.2mW/g