
	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 1(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			2(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 4/22/2010 11:38:04 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide_EDGE850_low_chan_amb_temp_23.5_liq_temp_22.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69

Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.918 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.32 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.2 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.63 W/kg


SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.856 mW/g

Maximum value of SAR (measured) = 1.28 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 3(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

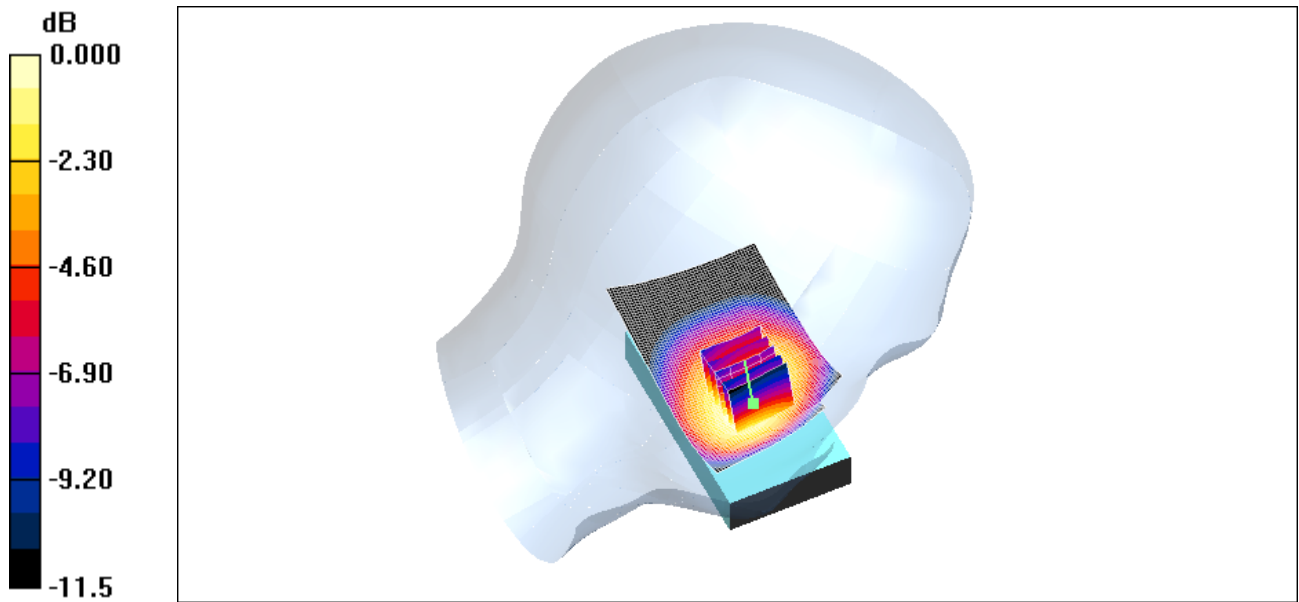

0 dB = 1.28mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			4(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 4/22/2010 11:54:21 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide_EDGE850_mid_chan_amb_temp_23.3_liq_temp_22.0C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.31 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.9 V/m; Power Drift = 0.001 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.856 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.28 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 5(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

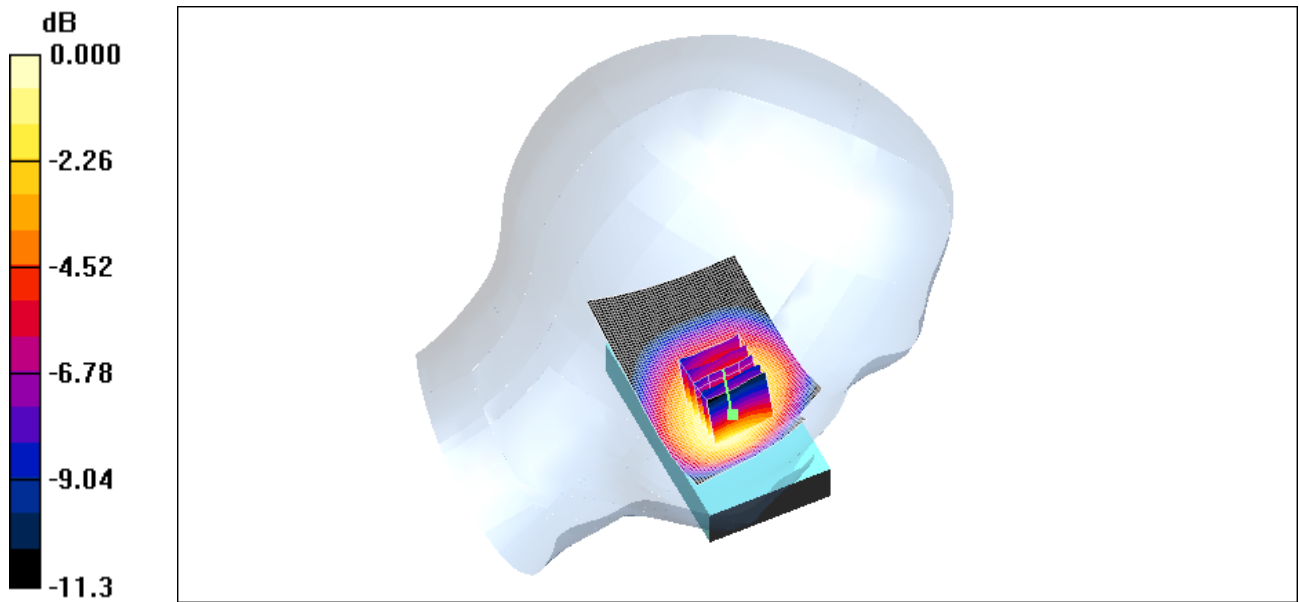

0 dB = 1.28mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			6(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 4/23/2010 12:12:22 AM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide_EDGE850_high_chan_amb_temp_23.8_liq_temp_22.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.34 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.1 V/m; Power Drift = -0.043 dB


Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.881 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.32 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 7(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

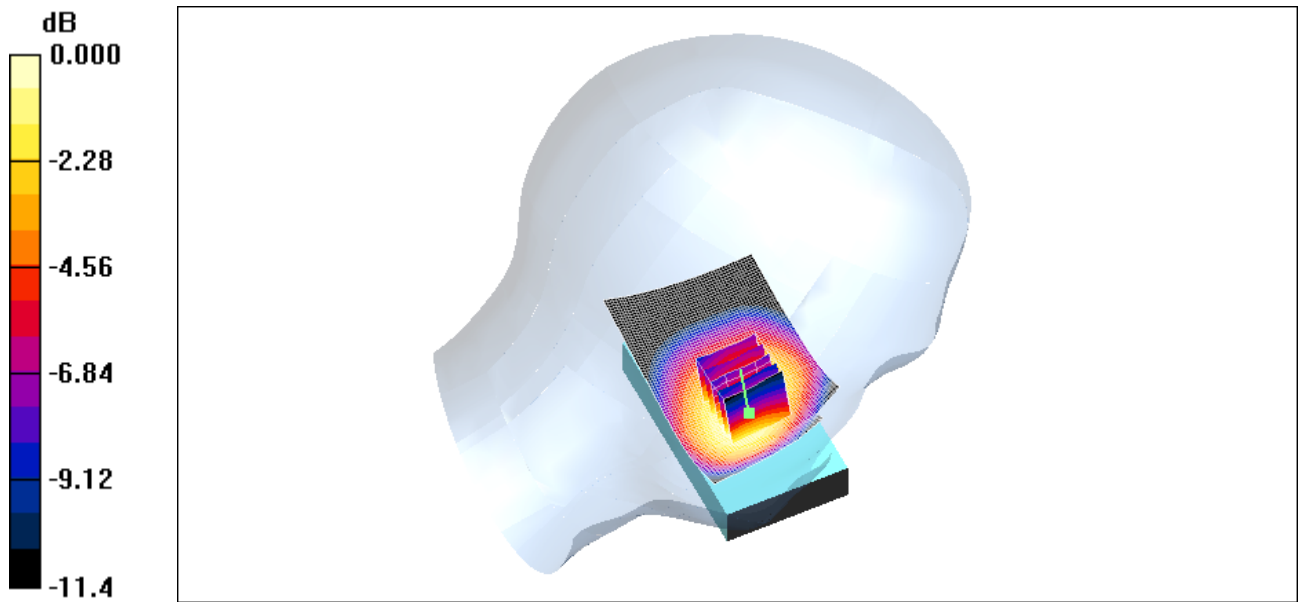

0 dB = 1.32mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 8(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 4/23/2010 12:30:17 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

[LeftHandSide Tilt EDGE850 high chan amb temp 23.9 liq temp 22.4C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69

Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.710 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 17.6 V/m; Power Drift = -0.003 dB


Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.501 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.701 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 9(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

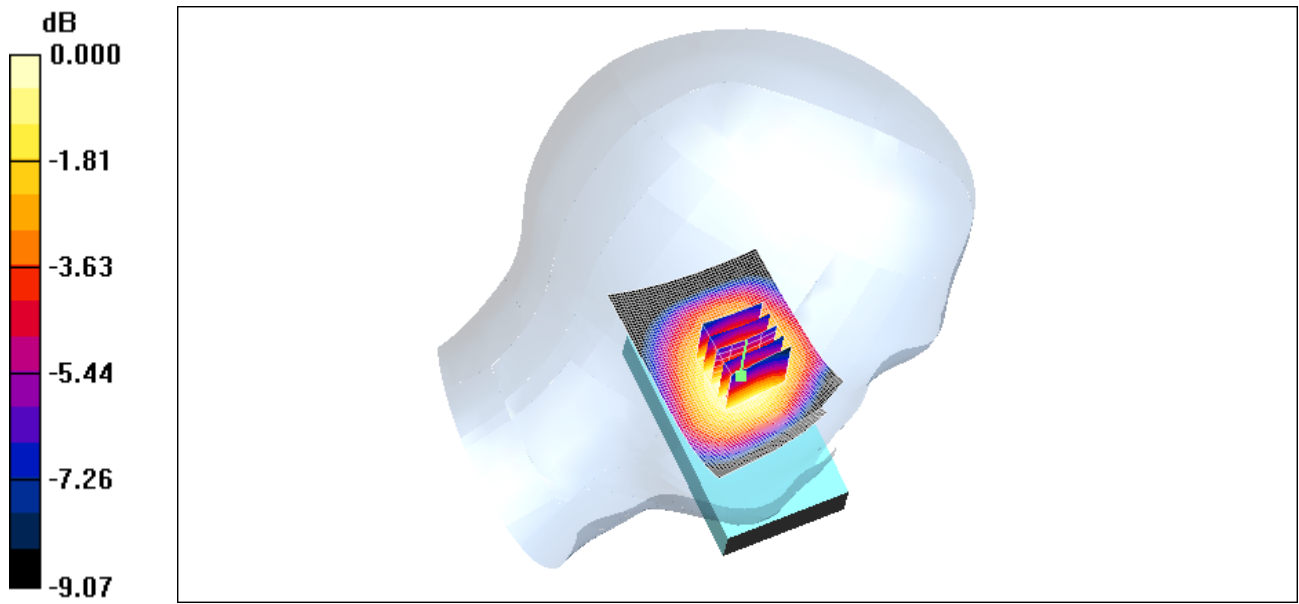

0 dB = 0.701mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			10(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 4/22/2010 10:43:28 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [RightHandSide_EDGE850_low_chan_amb_temp_23.5_liq_temp_22.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69
Program Name: Compliance Testing: (Right-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.918 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


DASY4 Configuration:


- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.44 mW/g


Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12.9 V/m; Power Drift = -0.059 dB
Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.909 mW/g

Maximum value of SAR (measured) = 1.34 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 11(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

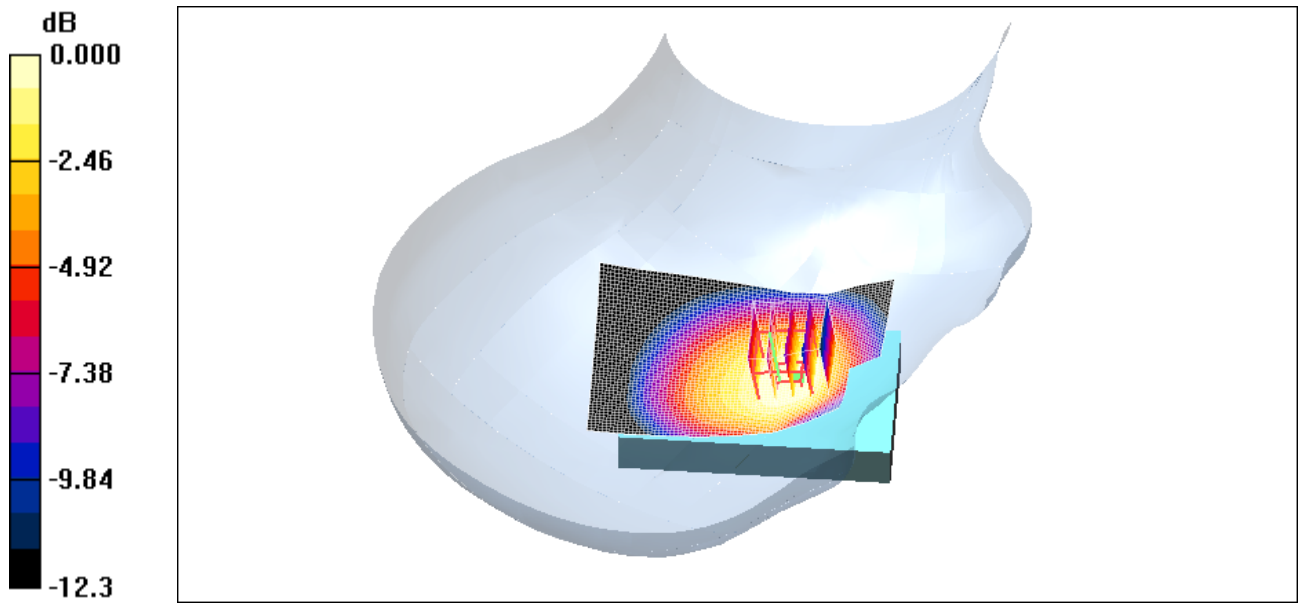

0 dB = 1.34mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 12(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 4/22/2010 10:58:18 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [RightHandSide_EDGE850_mid_chan_amb_temp_23.4_liq_temp_22.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69
Program Name: Compliance Testing: (Right-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.42 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 12.7 V/m; Power Drift = -0.070 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.900 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.32 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 13(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

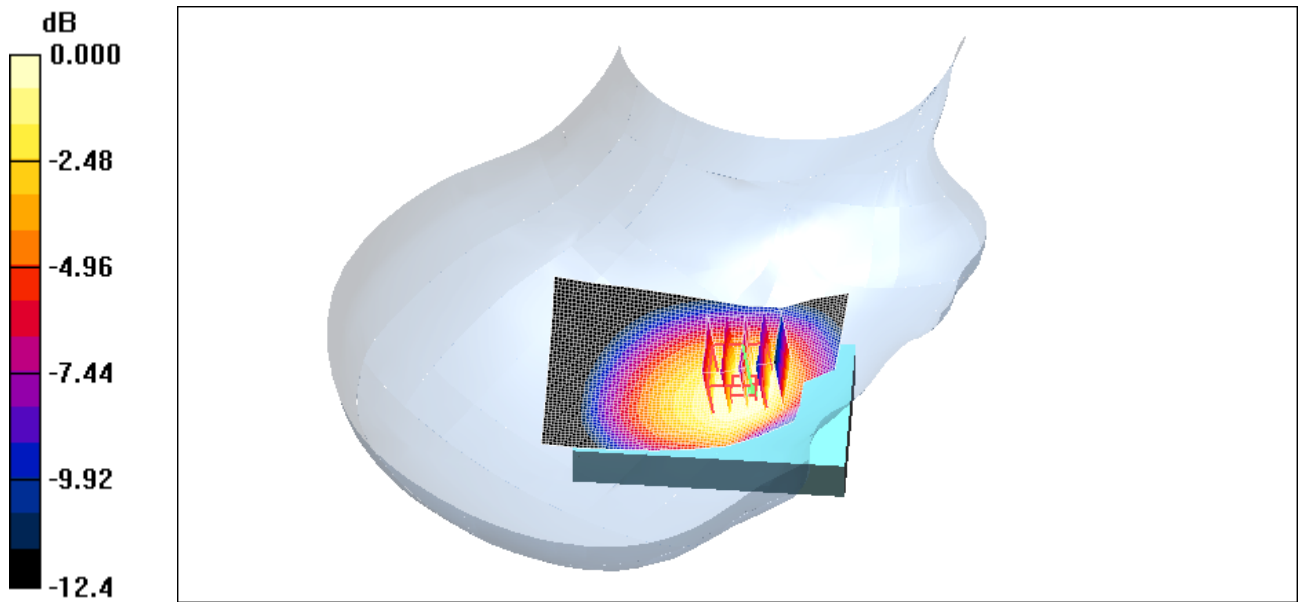

0 dB = 1.32mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 14(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 4/22/2010 11:14:25 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [RightHandSide_EDGE850_high_chan_amb_temp_23.5_liq_temp_22.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69
Program Name: Compliance Testing: (Right-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.46 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 12.9 V/m; Power Drift = 0.017 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.933 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.38 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 15(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

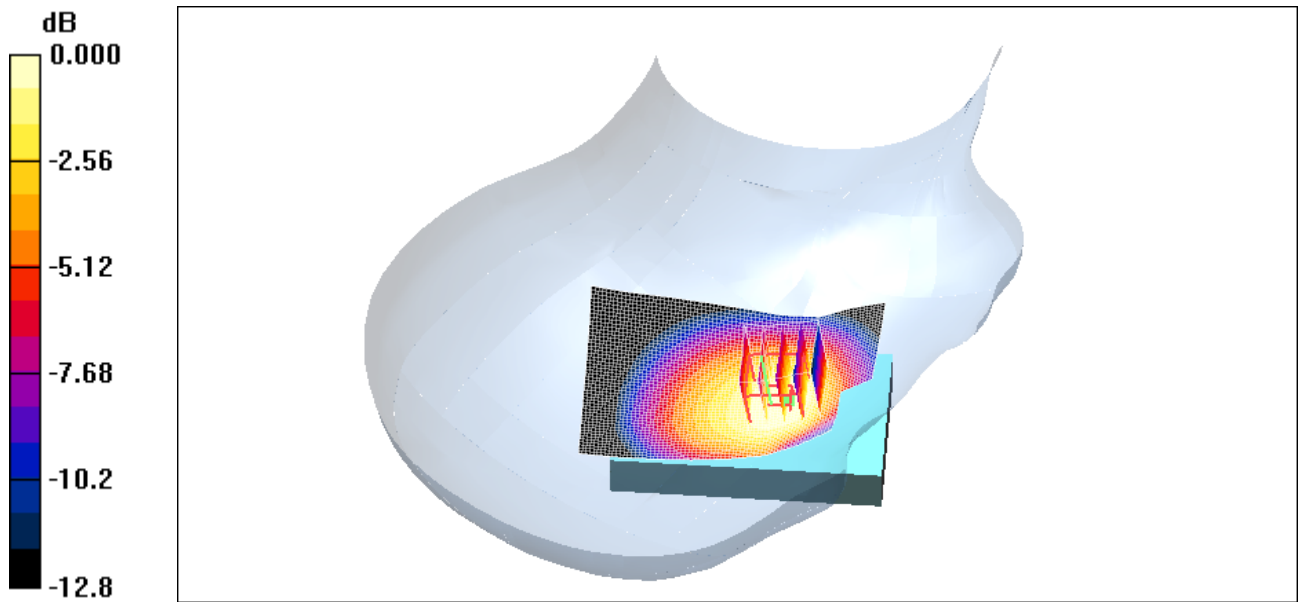

0 dB = 1.38mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 16(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 4/23/2010 1:35:36 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

[RightHandSide Tilt EDGE850 high chan amb temp 23.2 liq temp 22.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69

Program Name: Compliance Testing: (Right-Hand Side)

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.716 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 17.9 V/m; Power Drift = -0.029 dB


Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.676 mW/g; SAR(10 g) = 0.502 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.709 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 17(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

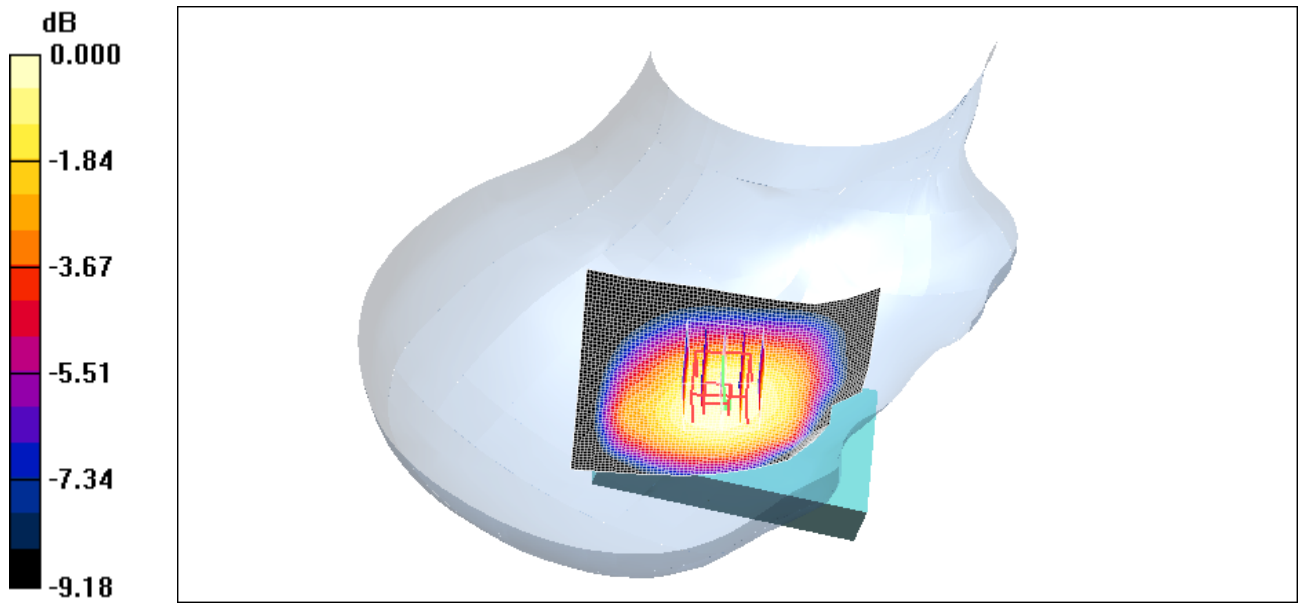

0 dB = 0.709mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 18(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 4/23/2010 2:00:19 AM

Test Laboratory: RIM TESTING SERVICES

File Name: [RightHandSide_GSM850_high_chan_amb_temp_23.0_liq_temp_22.0C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 3158DB69
Program Name: Compliance Testing: (Right-Hand Side)

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.38 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.6 V/m; Power Drift = -0.044 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.875 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.29 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 19(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

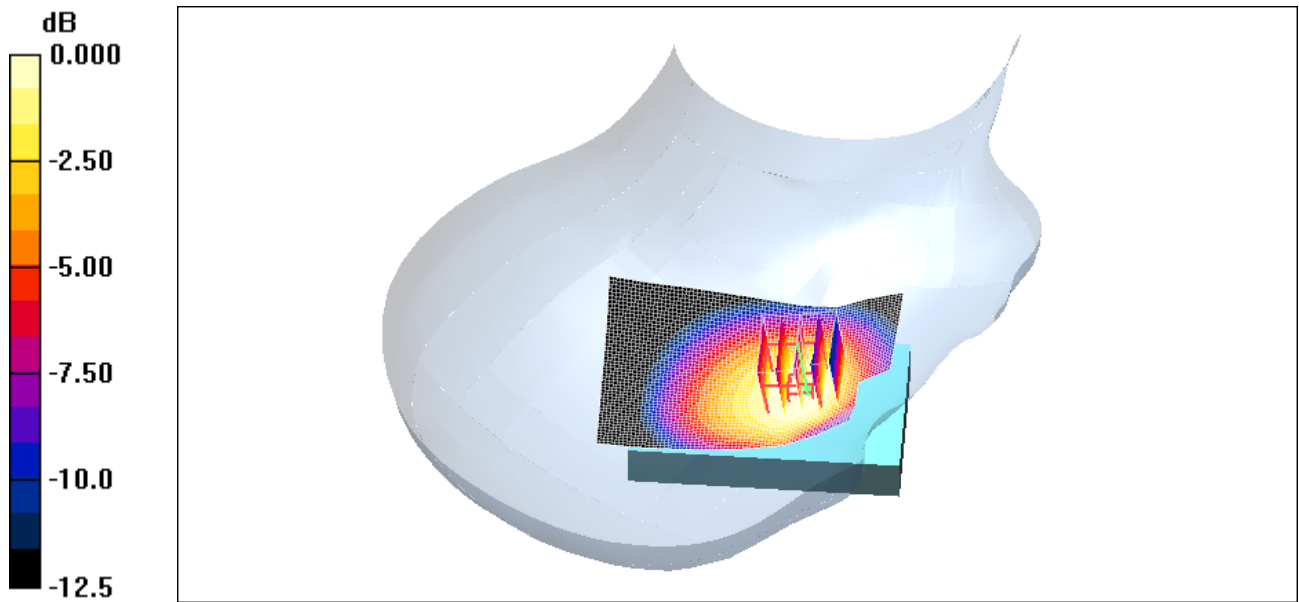

0 dB = 1.29mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 20(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 3/25/2010 9:20:22 AM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide_EDGE1900_low_chan_amb_temp_22.7_liq_temp_21.3C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.765 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.0 V/m; Power Drift = -0.141 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.733 mW/g; SAR(10 g) = 0.410 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.777 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 21(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

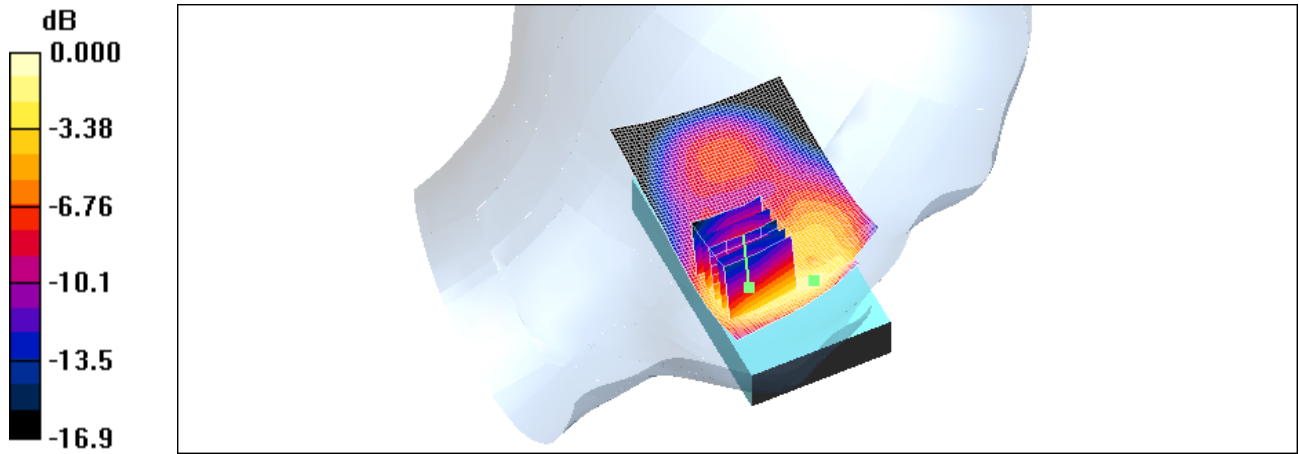

0 dB = 0.777mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			22(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/25/2010 9:36:37 AM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide_EDGE1900_mid_chan_amb_temp_22.6_liq_temp_21.4C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:


- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.789 mW/g


Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.7 V/m; Power Drift = -0.032 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.767 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.819 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 23(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

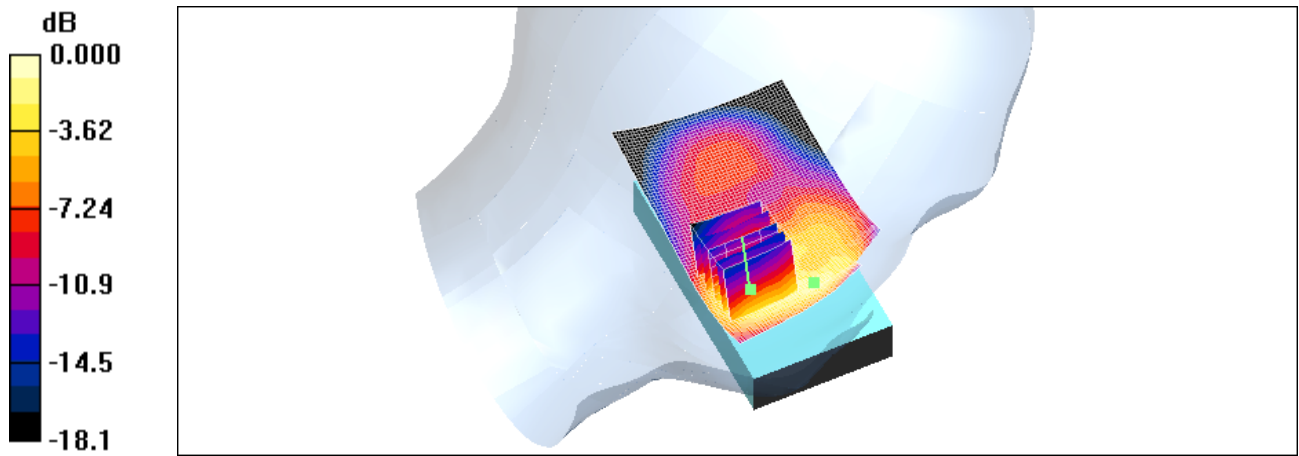

0 dB = 0.819mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			24(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/25/2010 9:52:31 AM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide_EDGE1900_high_chan_amb_temp_22.4_liq_temp_21.5C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:


- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.824 mW/g


Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.5 V/m; Power Drift = 0.052 dB
Peak SAR (extrapolated) = 1.27 W/kg
SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 0.849 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 25(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

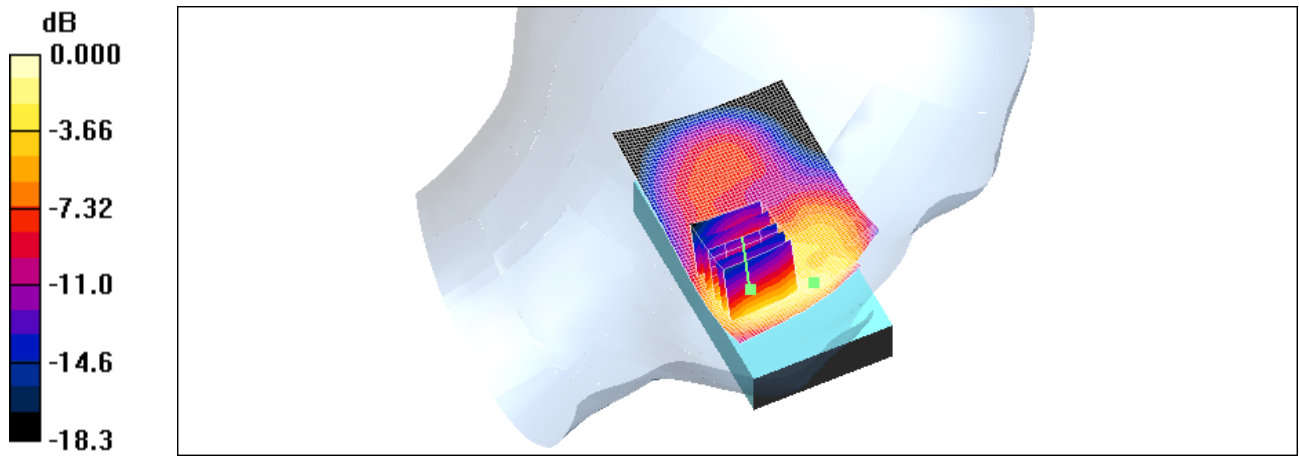

0 dB = 0.849mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 26(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 3/25/2010 11:15:15 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

[LeftHandSide Tilt EDGE1900 high chan amb temp 23.0 liq temp 21.4C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B

Program Name: Compliance Testing: (Left-Hand Side)

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.303 mW/g


Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.8 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.434 W/kg


SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.300 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 27(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

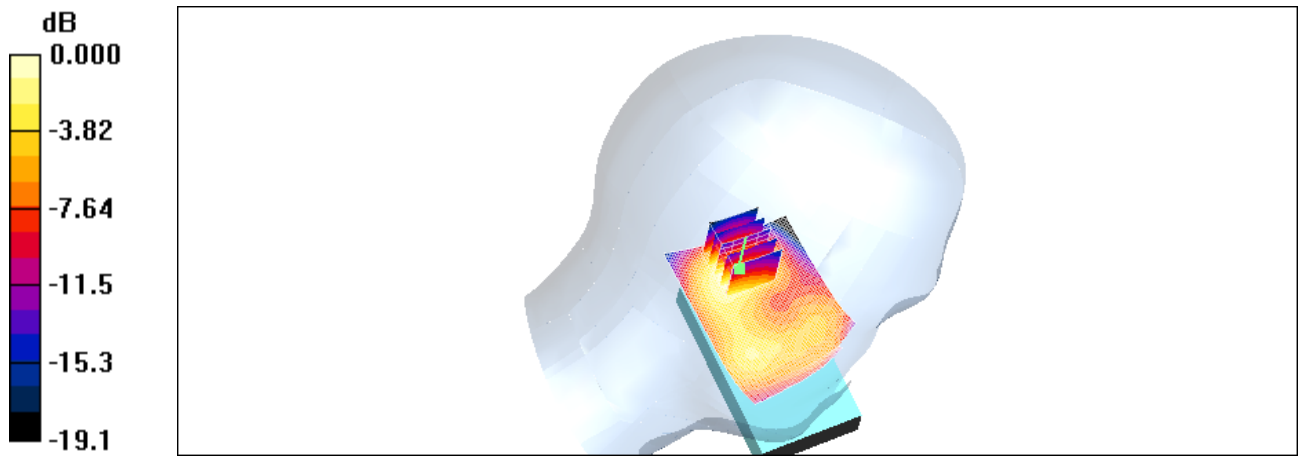

0 dB = 0.300mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			28(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/25/2010 10:55:05 AM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide_GSM1900_high_chan_amb_temp_22.2_liq_temp_21.1C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:


- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.834 mW/g


Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.78 V/m; Power Drift = -0.134 dB
Peak SAR (extrapolated) = 1.27 W/kg
SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 0.844 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 29(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

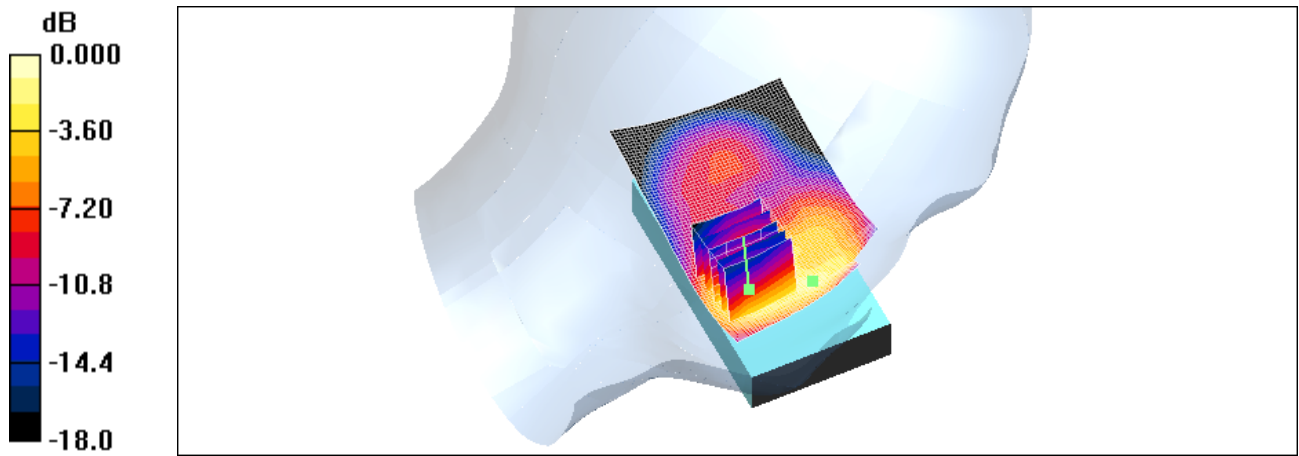

0 dB = 0.844mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 30(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 3/25/2010 11:56:10 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

[RightHandSide_EDGE1900_high_chan_amb_temp_22.5_liq_temp_21.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B

Program Name: Compliance Testing: (Right-Hand Side)

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.622 mW/g


Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.21 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.879 W/kg


SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.599 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 31(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

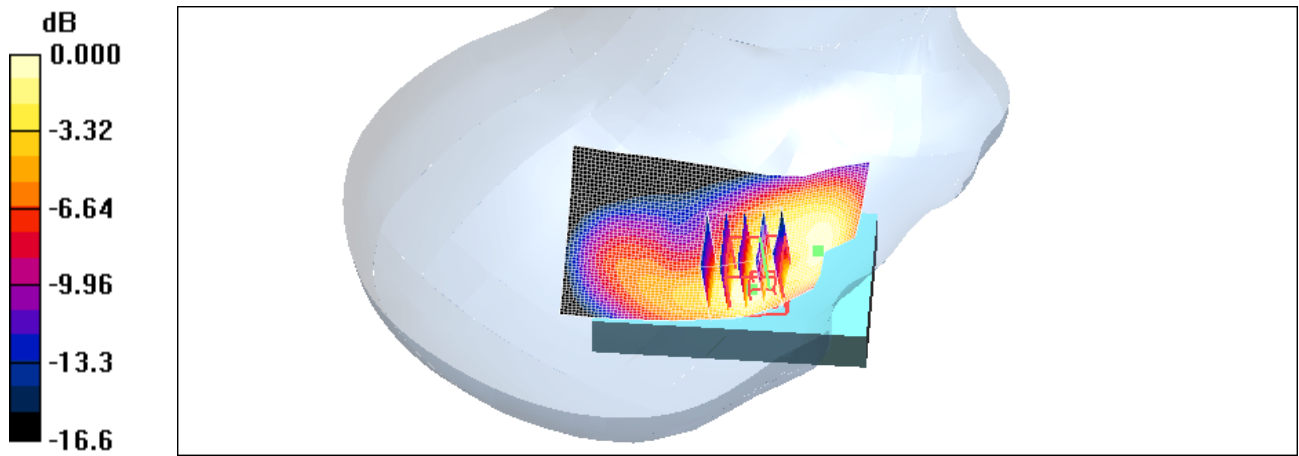

0 dB = 0.599mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			32(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/25/2010 12:14:09 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[RightHandSide Tilt EDGE1900 high chan amb temp 22.3 liq temp 21.1C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B

Program Name: Compliance Testing: (Right-Hand Side)

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.310 mW/g


Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.1 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.453 W/kg


SAR(1 g) = 0.282 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.309 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 33(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

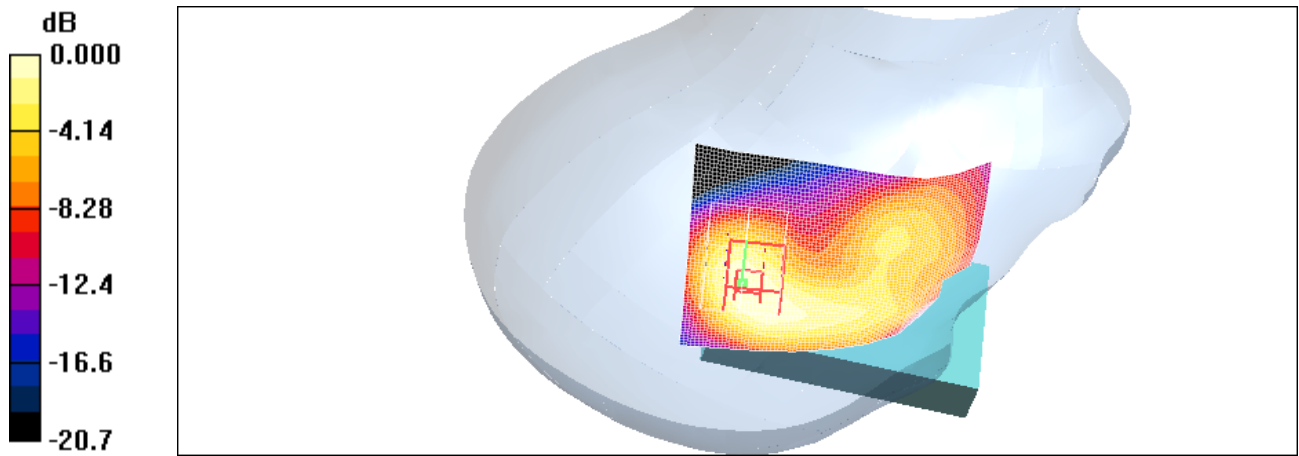

0 dB = 0.309mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			34(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/15/2010 3:56:15 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide 802.11b low chan Amb Tem 23.2 Liq Tem 21.3 C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: P1528 Protocol (Left-Hand Side)

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.5, 4.5, 4.5); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.206 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.11 V/m; Power Drift = 0.065 dB


Peak SAR (extrapolated) = 0.443 W/kg


SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.094 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.204 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 35(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

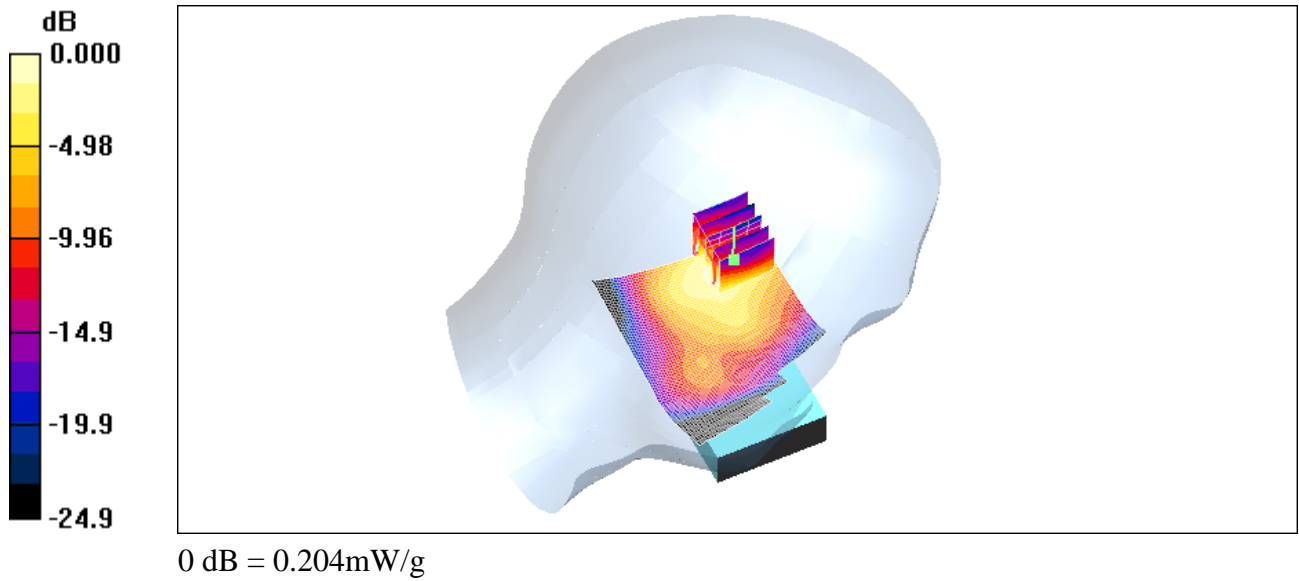

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			36(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/15/2010 5:34:40 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide 802.11b mid chan Amb Tem 23.1 Liq Tem 21.2 C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: P1528 Protocol (Left-Hand Side)

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.5, 4.5, 4.5); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.281 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.16 V/m; Power Drift = 0.027 dB


Peak SAR (extrapolated) = 0.618 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.126 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.277 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 37(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

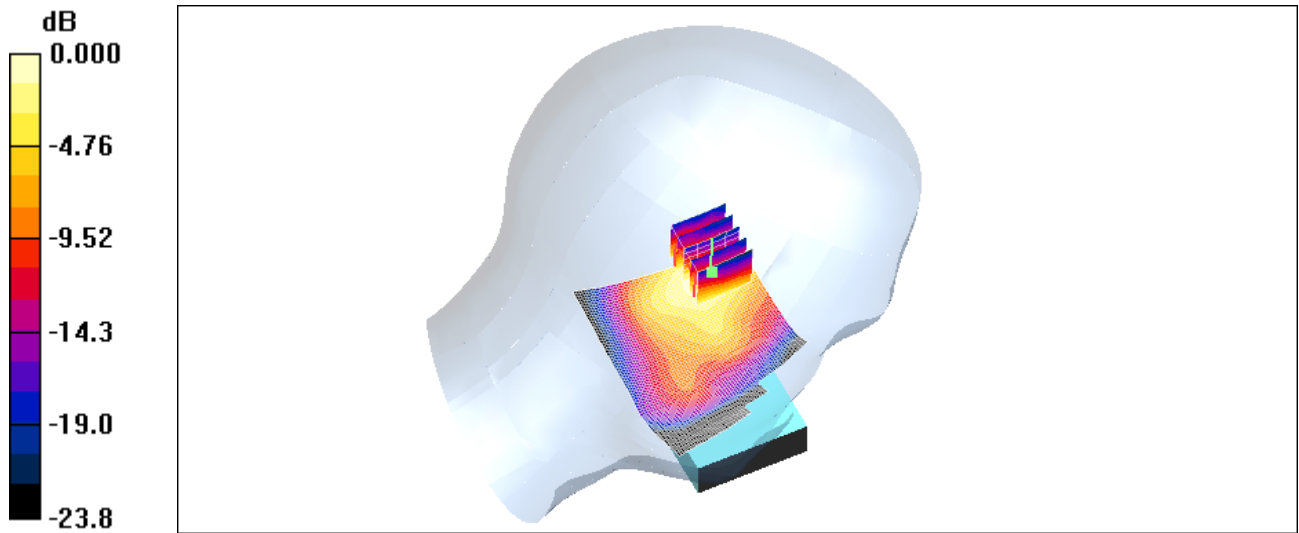

0 dB = 0.277mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			38(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/15/2010 5:54:58 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [LeftHandSide 802.11b high chan Amb Tem 22.7 Liq Tem 21.1 C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: P1528 Protocol (Left-Hand Side)

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.5, 4.5, 4.5); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.259 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.13 V/m; Power Drift = -0.021 dB


Peak SAR (extrapolated) = 0.598 W/kg


SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.120 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.275 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 39(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

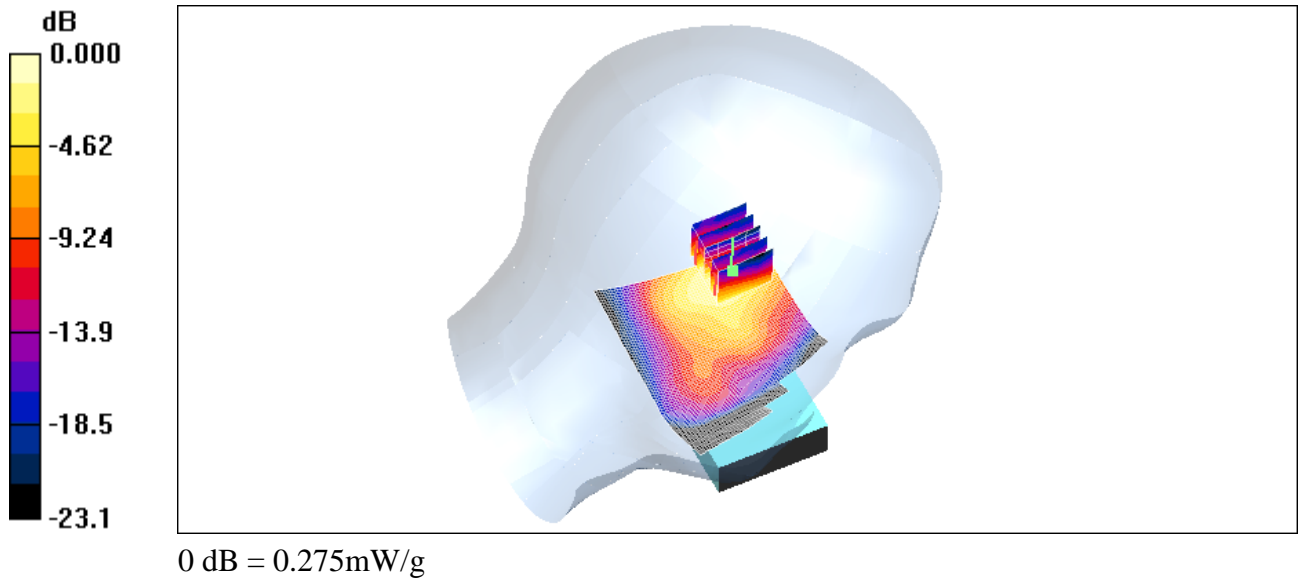

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			40(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/15/2010 6:14:21 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[LeftHandSide Tilt 802.11b mid chan Amb Tem 23.7 Liq Tem 21.4 C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: P1528 Protocol (Left-Hand Side)

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.5, 4.5, 4.5); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.231 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.8 V/m; Power Drift = -0.086 dB


Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.114 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.220 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 41(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

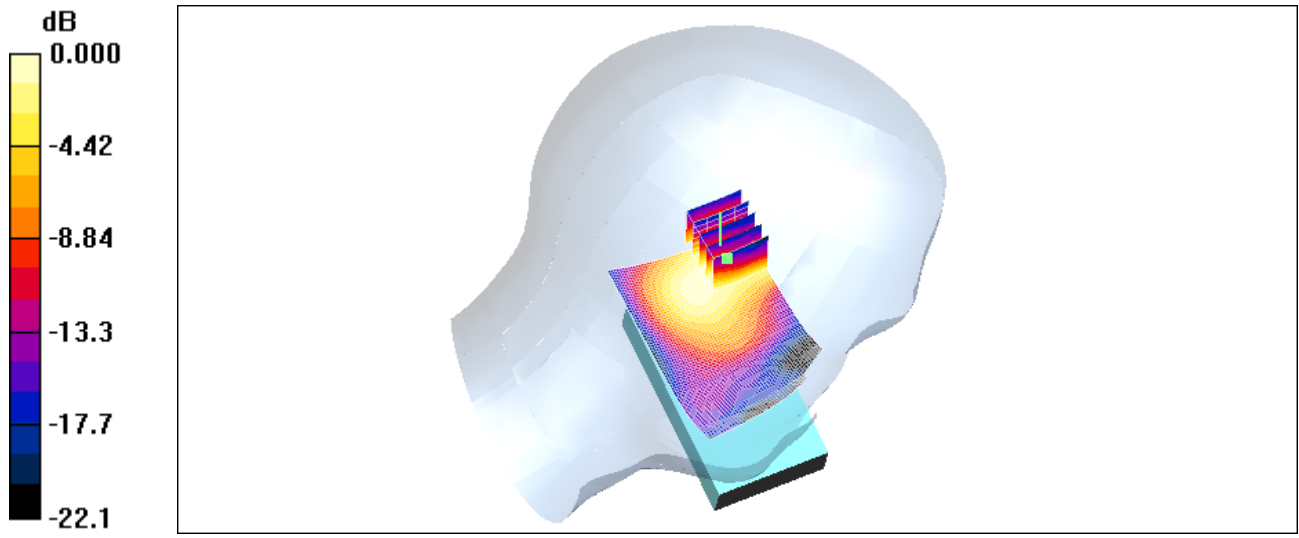

0 dB = 0.220mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			42(46)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID:
Andrew Becker	Mar 15 – Apr 26, 2010	RTS-2341-1004-61	L6ARCW40GW	2503A-RCW40GW

Date/Time: 3/15/2010 6:32:31 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [RightHandSide 802.11b mid chan Amb Tem 23.1 Liq Tem 21.3C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: P1528 Protocol (Right-Hand Side)

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 38$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.5, 4.5, 4.5); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.195 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.2 V/m; Power Drift = 0.063 dB


Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.098 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.188 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 43(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

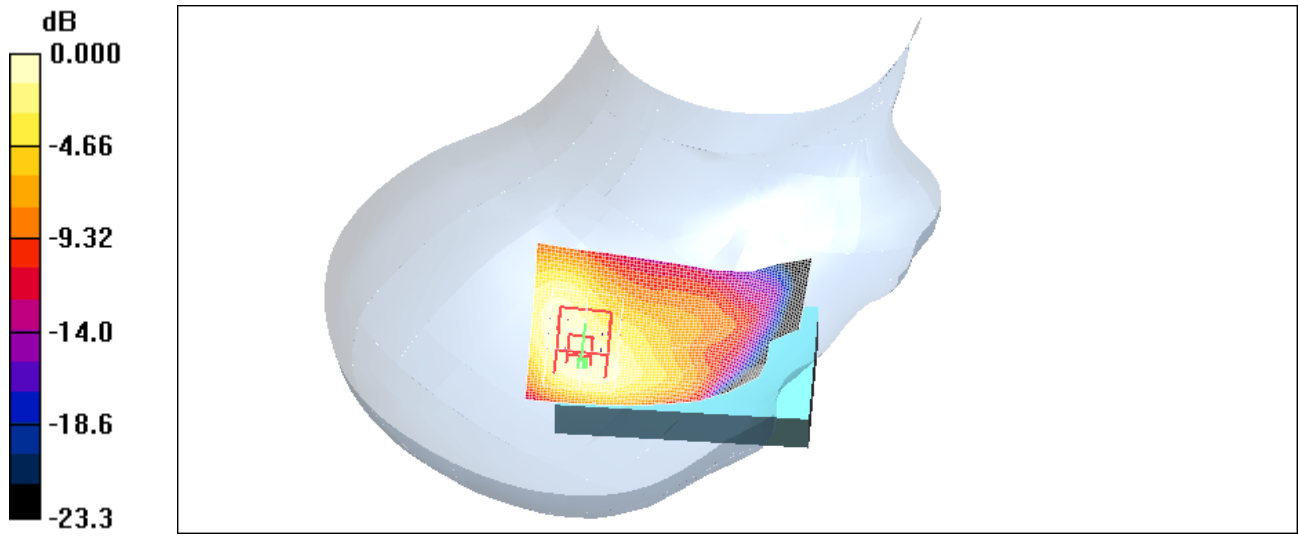

0 dB = 0.188mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 44(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Date/Time: 3/15/2010 6:59:41 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[RightHandSide Tilt 802.11b mid chan Amb Tem 22.3 Liq Tem 21.0C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 316FA02B
Program Name: Compliance Testing: P1528 Protocol (Right-Hand Side)

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.5, 4.5, 4.5); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.240 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.8 V/m; Power Drift = -0.011 dB


Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.117 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.239 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 45(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

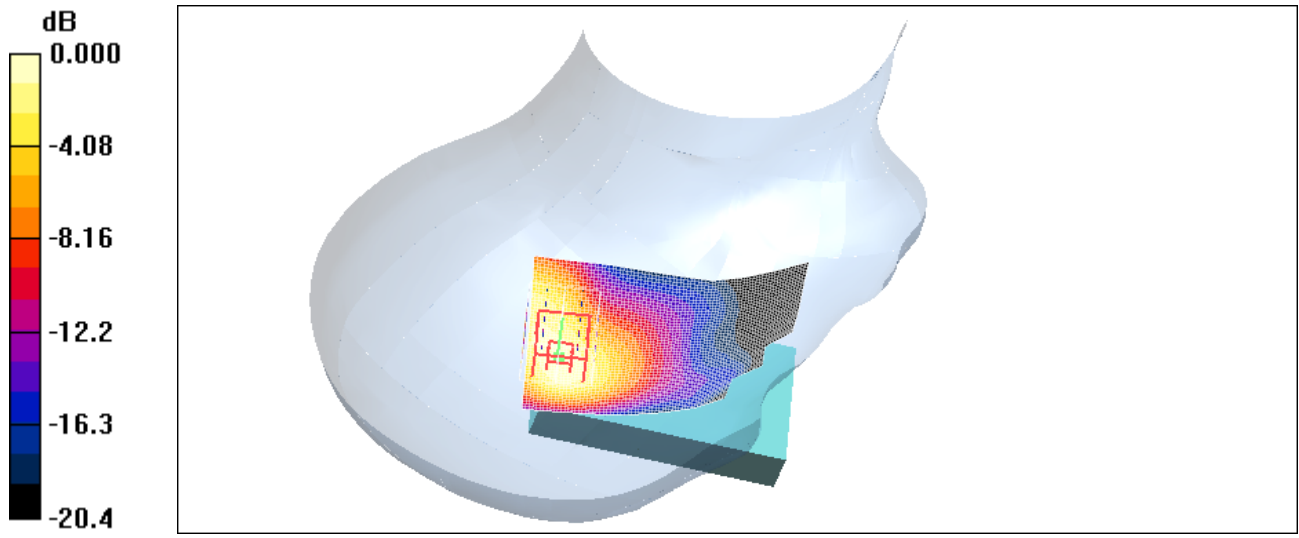

0 dB = 0.239mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RCW41GW SAR Report			Page 46(46)
	Author Data Andrew Becker	Dates of Test Mar 15 – Apr 26, 2010	Test Report No RTS-2341-1004-61	FCC ID: L6ARCW40GW

Z axis plot for the worst case head configuration:

