
	Document Appendix C for the BlackBerry® Smartphone Model RCY71UW			Page 1(14)
	Author Data Hang Wang	Dates of Test Nov 25 - 29, 2010	Test Report No RTS-2337-1012-25	FCC ID: L6ARCY70UW

APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RCY71UW			2(14)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Hang Wang	Nov 25 - 29, 2010	RTS-2337-1012-25	L6ARCY70UW	2503A-RCY70UW

Date/Time: 11/29/2010 7:13:04 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_802.11b_mid_chan_amb_temp_23.8C_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: Not Specified

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.105 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.11 V/m; Power Drift = -0.194 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.055 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 mW/g



Author Data
Hang Wang

Dates of Test
Nov 25 - 29, 2010


Test Report No
RTS-2337-1012-25

FCC ID:
L6ARCY70UW

IC ID
2503A-RCY70UW

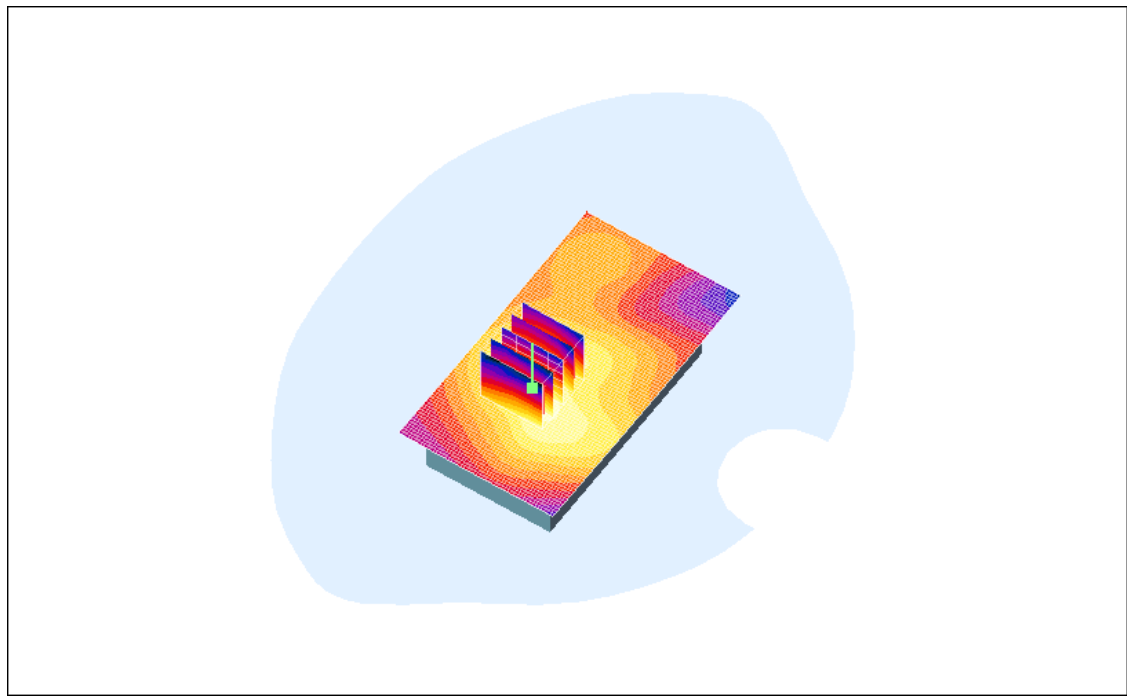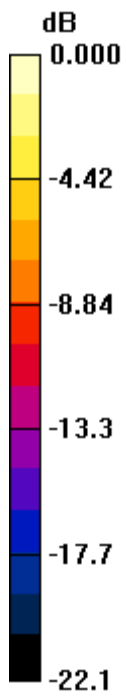

0 dB = 0.108mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RCY71UW			4(14)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Hang Wang	Nov 25 - 29, 2010	RTS-2337-1012-25	L6ARCY70UW	2503A-RCY70UW

Date/Time: 11/29/2010 7:28:48 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Front_802.11b_mid_chan_amb_temp_23.8C_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: Not Specified

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.066 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.25 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.034 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.071 mW/g



Author Data
Hang Wang

Dates of Test
Nov 25 - 29, 2010


Test Report No
RTS-2337-1012-25

FCC ID:
L6ARCY70UW

IC ID
2503A-RCY70UW

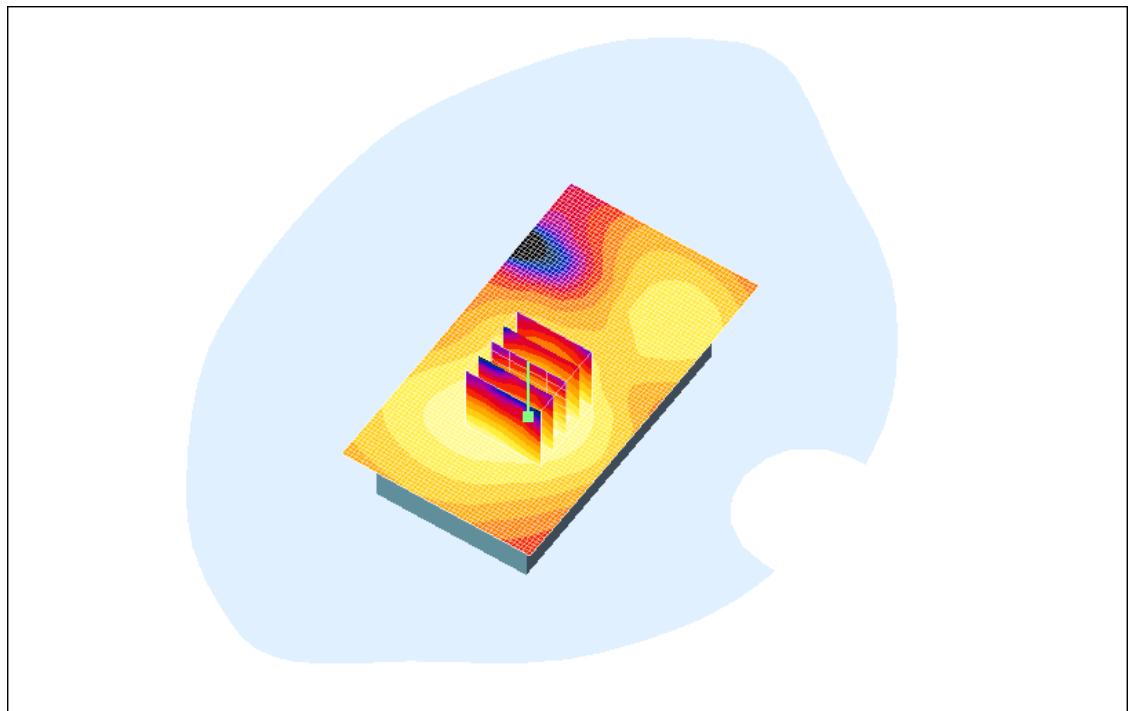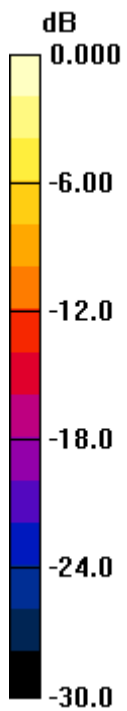

0 dB = 0.071mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RCY71UW			6(14)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Hang Wang	Nov 25 - 29, 2010	RTS-2337-1012-25	L6ARCY70UW	2503A-RCY70UW

Date/Time: 11/29/2010 7:42:52 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_HS#1_802.11b_mid_chan_amb_temp_23.8C_liq_
temp_22.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: Not Specified

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.086 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.63 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.046 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.090 mW/g


Author Data
Hang Wang

Dates of Test
Nov 25 - 29, 2010


Test Report No
RTS-2337-1012-25

FCC ID:
L6ARCY70UW

IC ID
2503A-RCY70UW

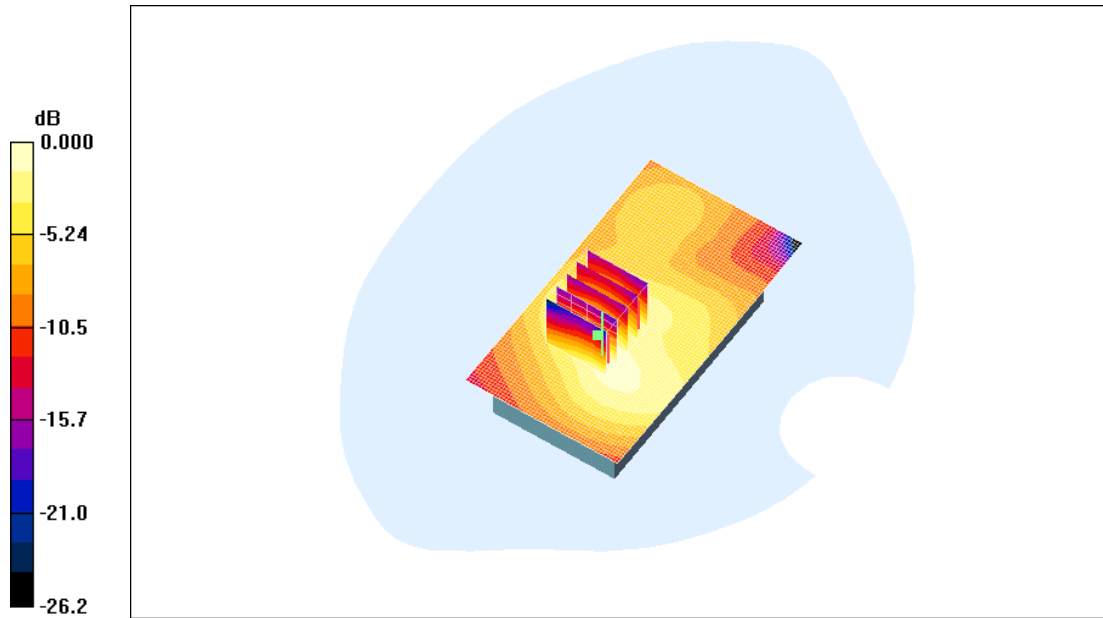

0 dB = 0.090mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RCY71UW			8(14)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Hang Wang	Nov 25 - 29, 2010	RTS-2337-1012-25	L6ARCY70UW	2503A-RCY70UW

Date/Time: 11/29/2010 7:56:57 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_HS#2_802.11b_mid_chan_amb_temp_23.8C_liq_
temp_22.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: Not Specified

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.077 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.63 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.040 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.078 mW/g


Author Data
Hang Wang

Dates of Test
Nov 25 - 29, 2010


Test Report No
RTS-2337-1012-25

FCC ID:
L6ARCY70UW

IC ID
2503A-RCY70UW

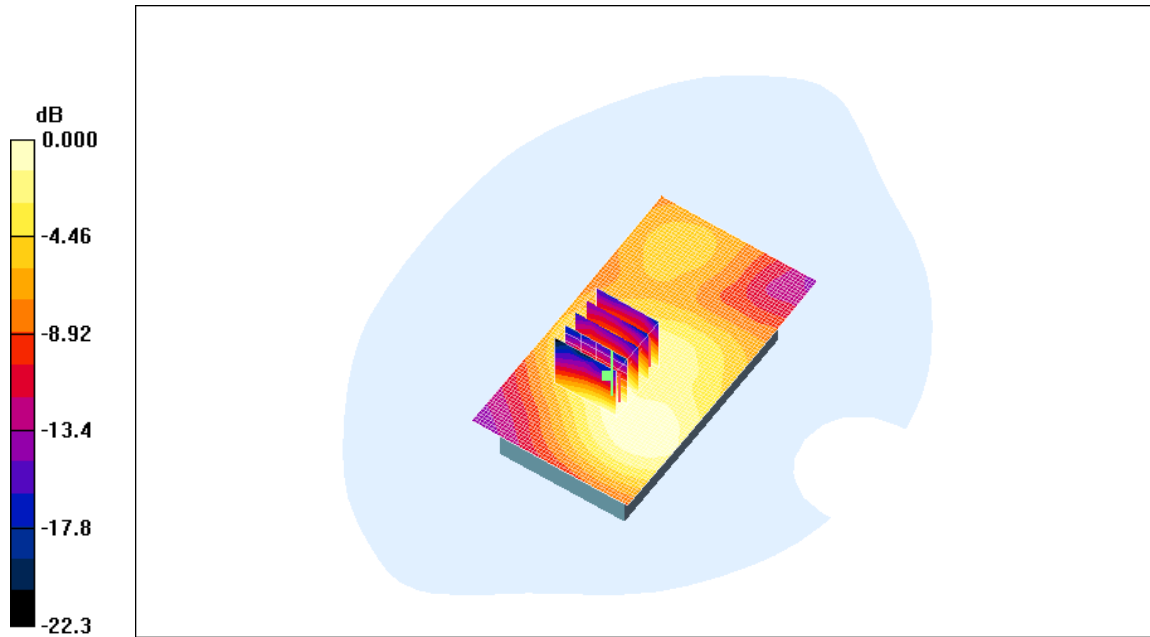

0 dB = 0.078mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RCY71UW			10(14)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Hang Wang	Nov 25 - 29, 2010	RTS-2337-1012-25	L6ARCY70UW	2503A-RCY70UW

Date/Time: 11/29/2010 8:11:35 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_HS#3_802.11b_mid_chan_amb_temp_23.7C_liq_
temp_22.5C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: Not Specified

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.088 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.46 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.045 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.089 mW/g


Author Data
Hang Wang

Dates of Test
Nov 25 - 29, 2010


Test Report No
RTS-2337-1012-25

FCC ID:
L6ARCY70UW

IC ID
2503A-RCY70UW

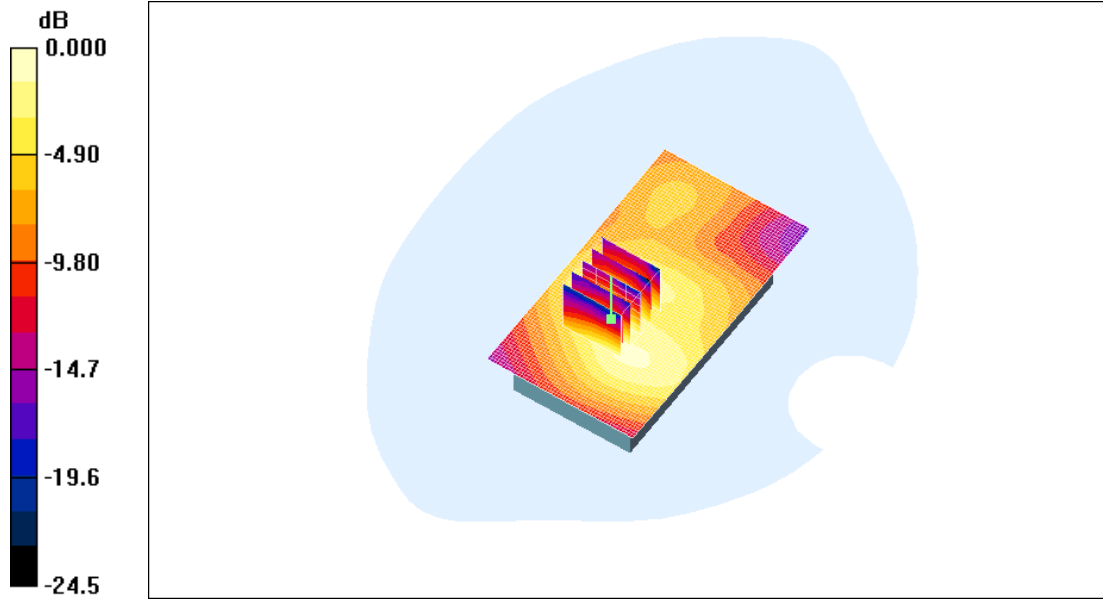

0 dB = 0.089mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RCY71UW			12(14)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Hang Wang	Nov 25 - 29, 2010	RTS-2337-1012-25	L6ARCY70UW	2503A-RCY70UW

Date/Time: 11/29/2010 8:26:23 PM

Test Laboratory: RIM Testing Services

25mm_Spacer_802.11b_mid_chan_amb_temp_23.8C_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: Not Specified

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.042 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.92 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.067 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.023 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.041 mW/g



Author Data
Hang Wang

Dates of Test
Nov 25 - 29, 2010

Test Report No
RTS-2337-1012-25

FCC ID:
L6ARCY70UW

IC ID
2503A-RCY70UW

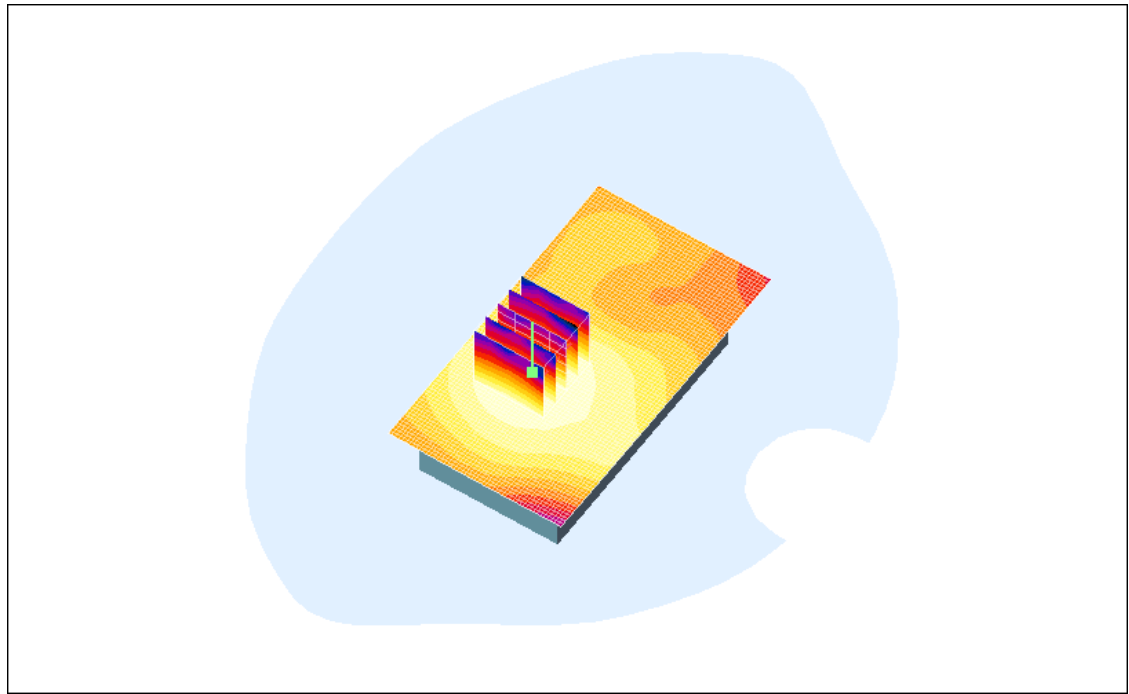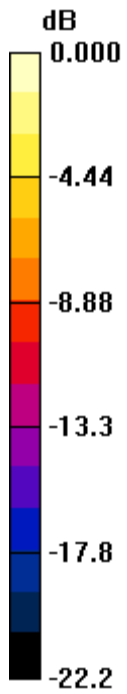

0 dB = 0.041mW/g

Author Data
Hang Wang

Dates of Test
Nov 25 - 29, 2010

Test Report No
RTS-2337-1012-25

FCC ID:
L6ARCY70UW

IC ID
2503A-RCY70UW

Worst Case Body SAR

