
	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 1(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 2(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/7/2011 7:35:49 PM, Date/Time: 3/7/2011 7:41:22 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE850_4_Slots_mid_chan_amb_temp_23.9_liq_tem
p_22.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 850 (4 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.45$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.315 mW/g


Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.077 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.230 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 3(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.311 mW/g

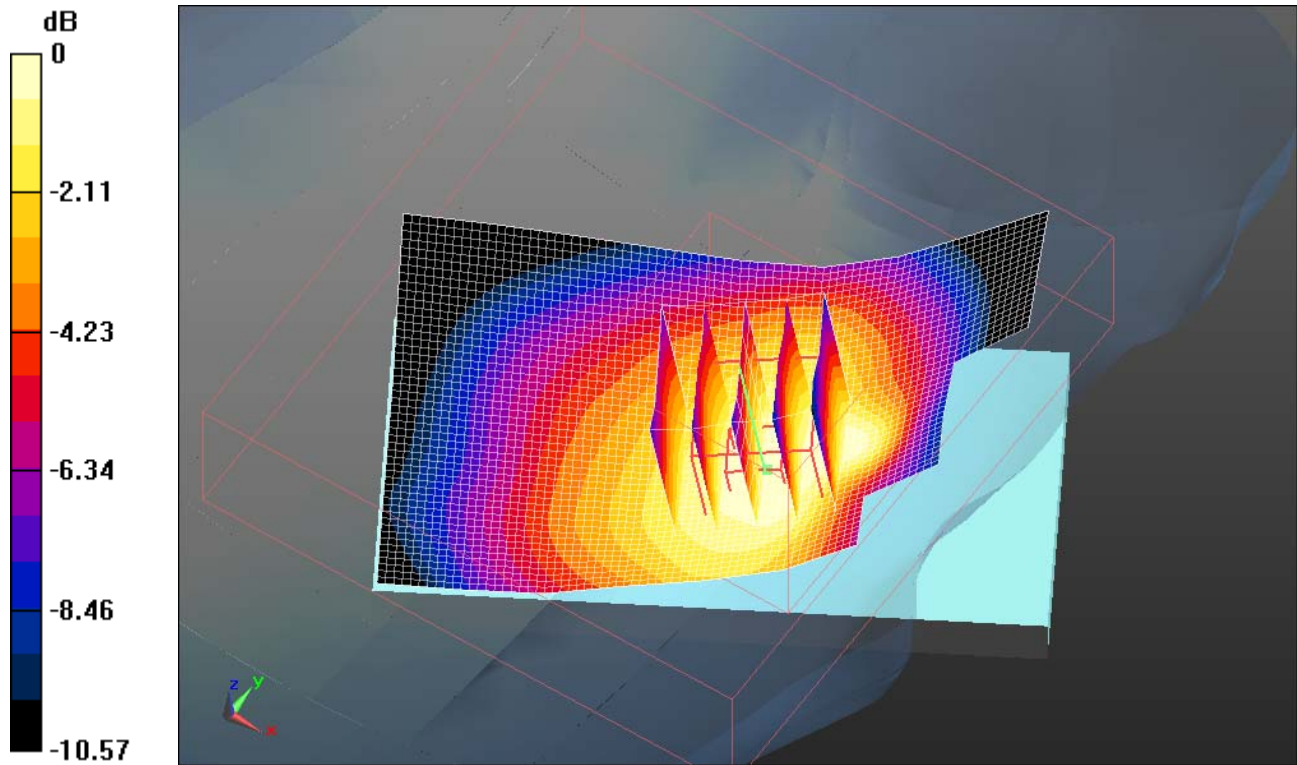

0 dB = 0.310mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 4(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/7/2011 6:50:11 PM, Date/Time: 3/7/2011 7:01:54 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE850_3_Slots_mid_chan_amb_temp_24.0_liq_tem
p_22.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 850 (3 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.45$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.397 mW/g


Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.296 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.302 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 5(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.410 mW/g

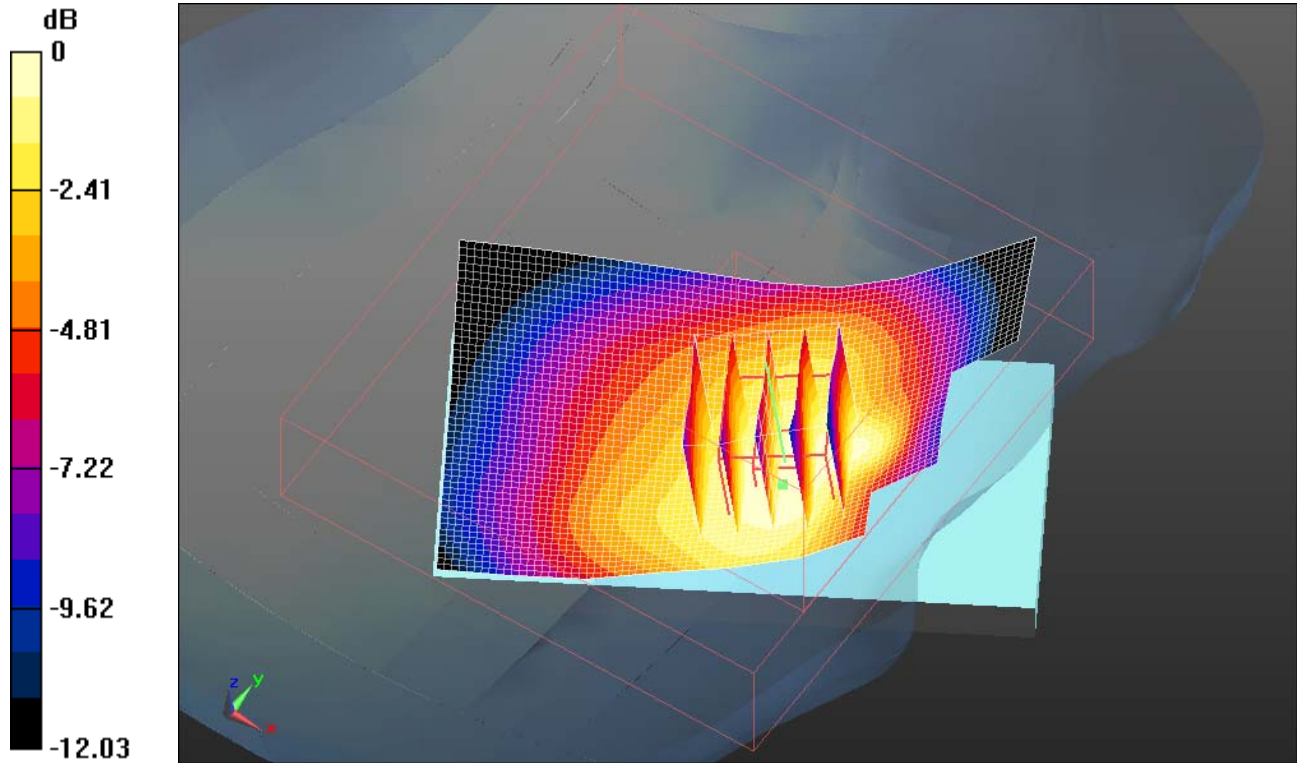

0 dB = 0.410mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 6(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/7/2011 6:08:07 PM, Date/Time: 3/7/2011 6:13:35 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_mid_chan_amb_temp_24.1_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 850 (2slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.45$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.307 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.560 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.236 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.312 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

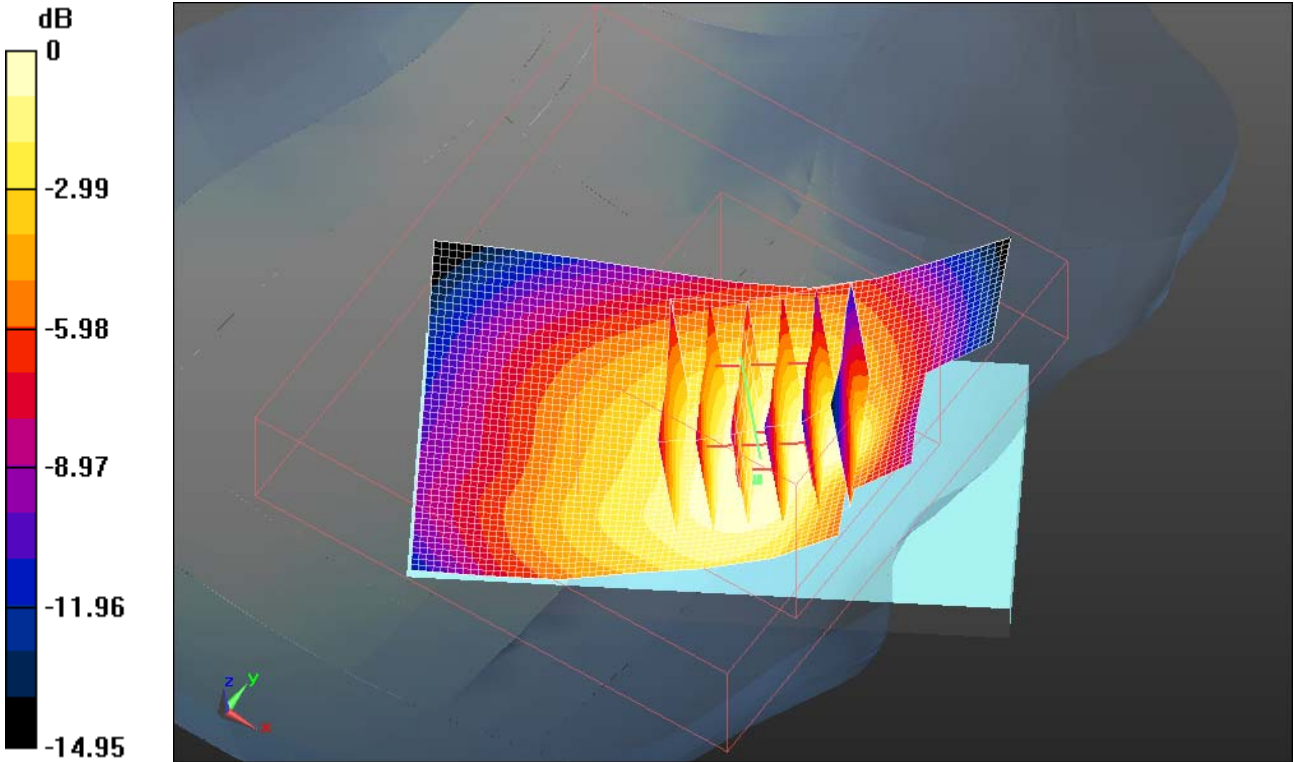

0 dB = 0.310mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 8(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/7/2011 8:09:07 PM, Date/Time: 3/7/2011 8:23:47 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_EDGE850_3_Slots_mid_chan_amb_temp_23.8_liq_
temp_22.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 850 (3 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.45$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.322 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.690 V/m; Power Drift = 0.28 dB


Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.231 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 9(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.314 mW/g

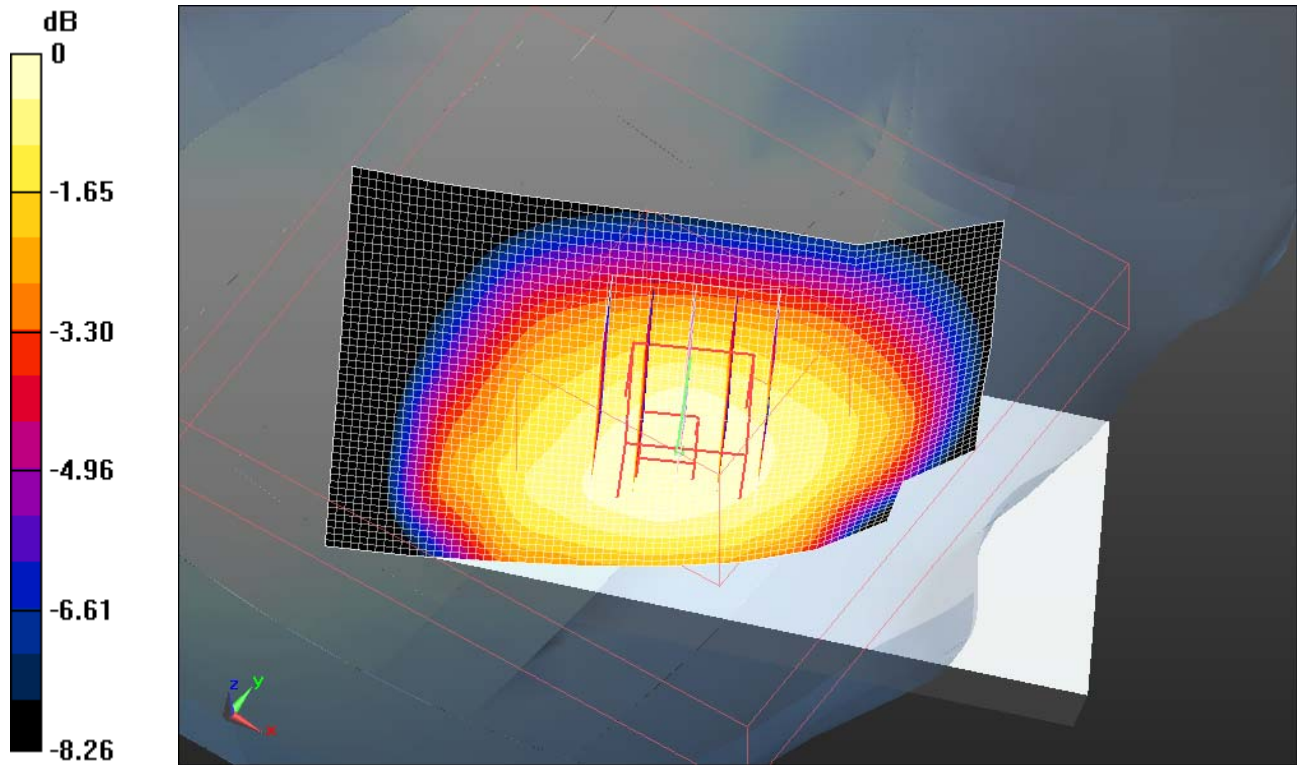

0 dB = 0.310mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 10(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/7/2011 7:50:32 PM, Date/Time: 3/7/2011 7:55:38 PM

Test Laboratory: RIM Testing Services

RightHandSide_GSM850_mid_chan_amb_temp_24.0_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.455$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.368 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.533 V/m; Power Drift = 0.32 dB


Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.263 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.354 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 11(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

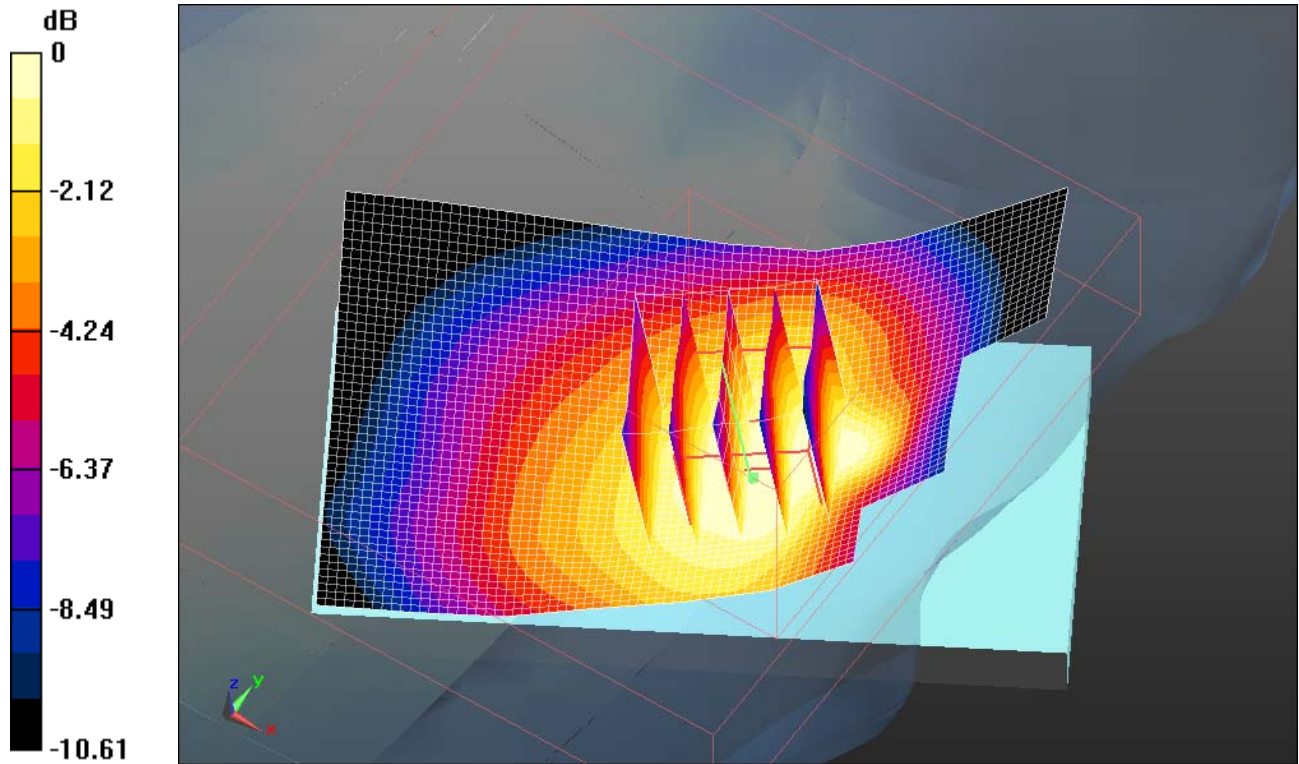

0 dB = 0.350mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 12(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/7/2011 8:40:19 PM, Date/Time: 3/7/2011 9:00:33 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_3Slots_mid_chan_amb_temp_23.8_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 850 (3 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.45$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.476 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.747 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.313 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 13(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.428 mW/g

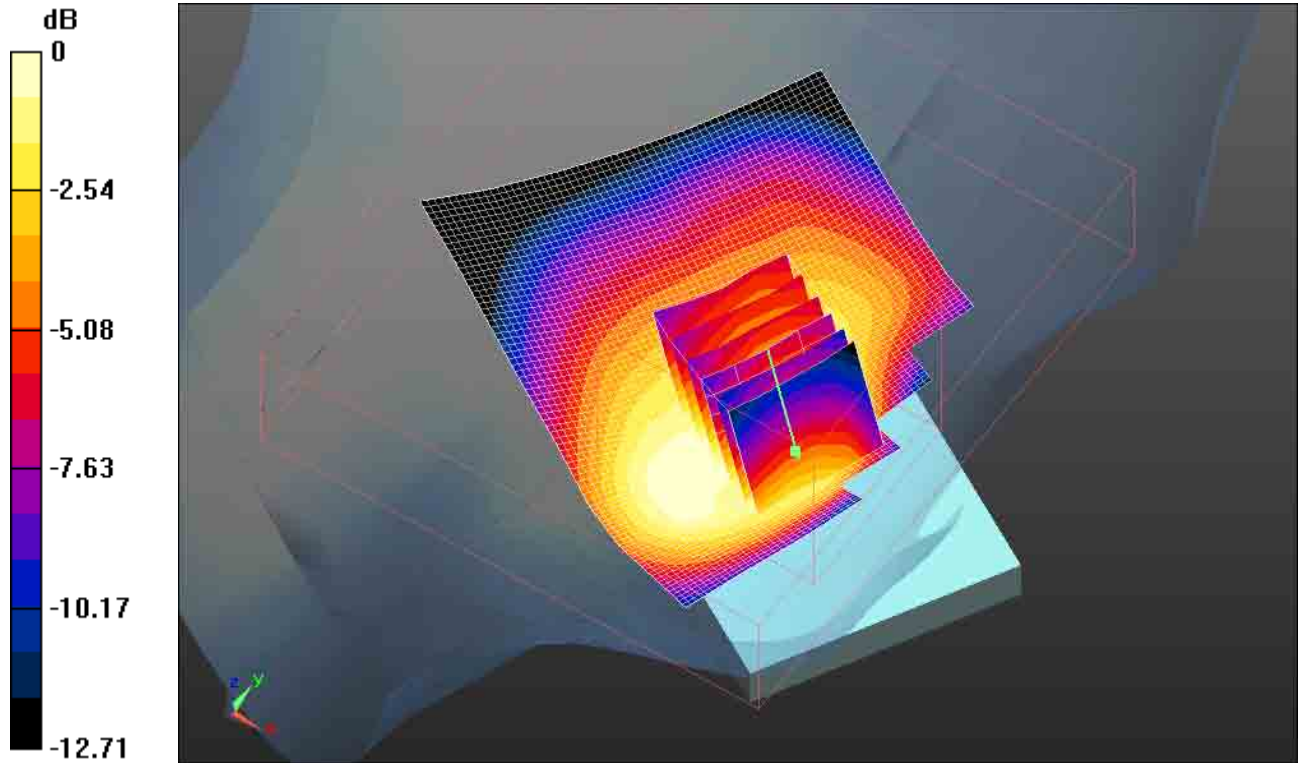

0 dB = 0.430mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 14(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/7/2011 9:11:39 PM, Date/Time: 3/7/2011 9:17:55 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE850_3_Slots_mid_chan_amb_temp_23.6_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 850 (3 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.45$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.299 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.973 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.216 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 15(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.299 mW/g

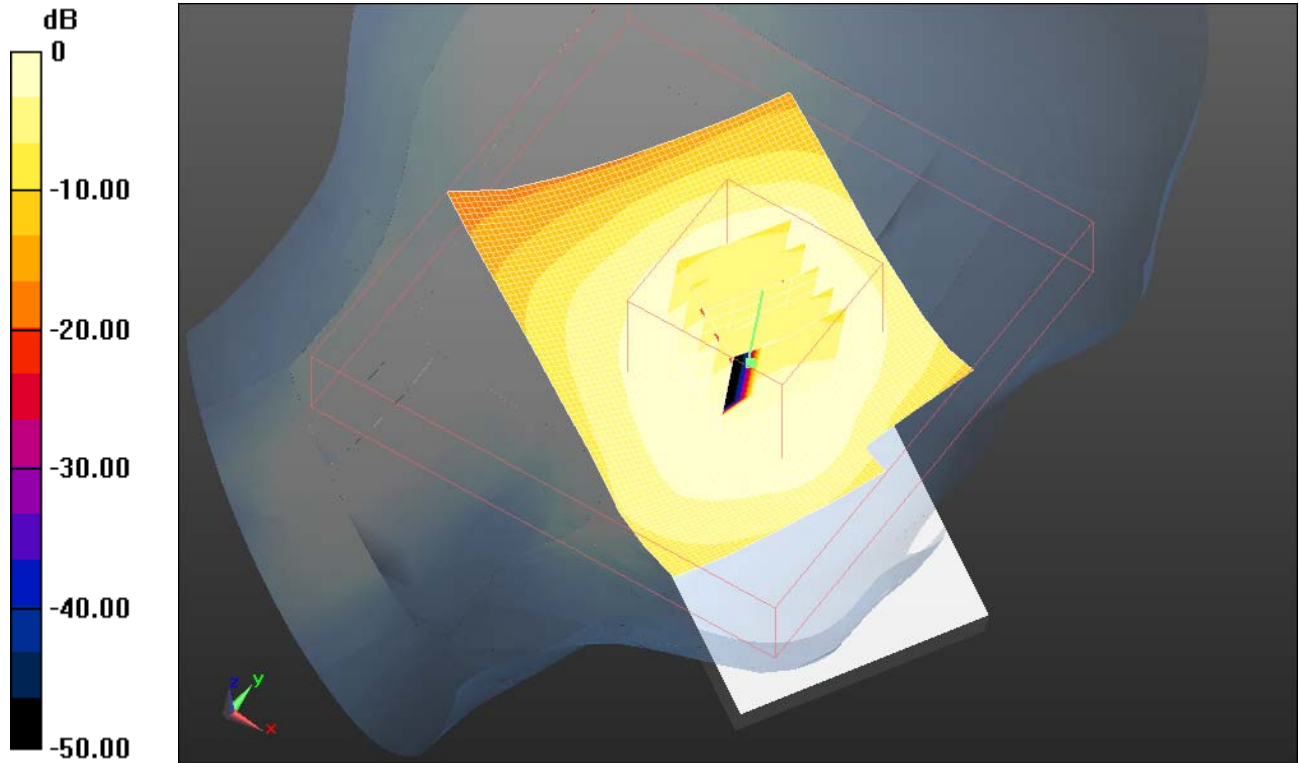

0 dB = 0.300mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 16(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/20/2011 5:16:20 PM, Date/Time: 4/20/2011 5:21:58 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_3_Slots_mid_chan_amb_temp_23.5_liq_tem p_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: EDGE 850 (3 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 4.472 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.05$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.420 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.362 V/m; Power Drift = 0.75 dB


Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.317 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 17(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.418 mW/g

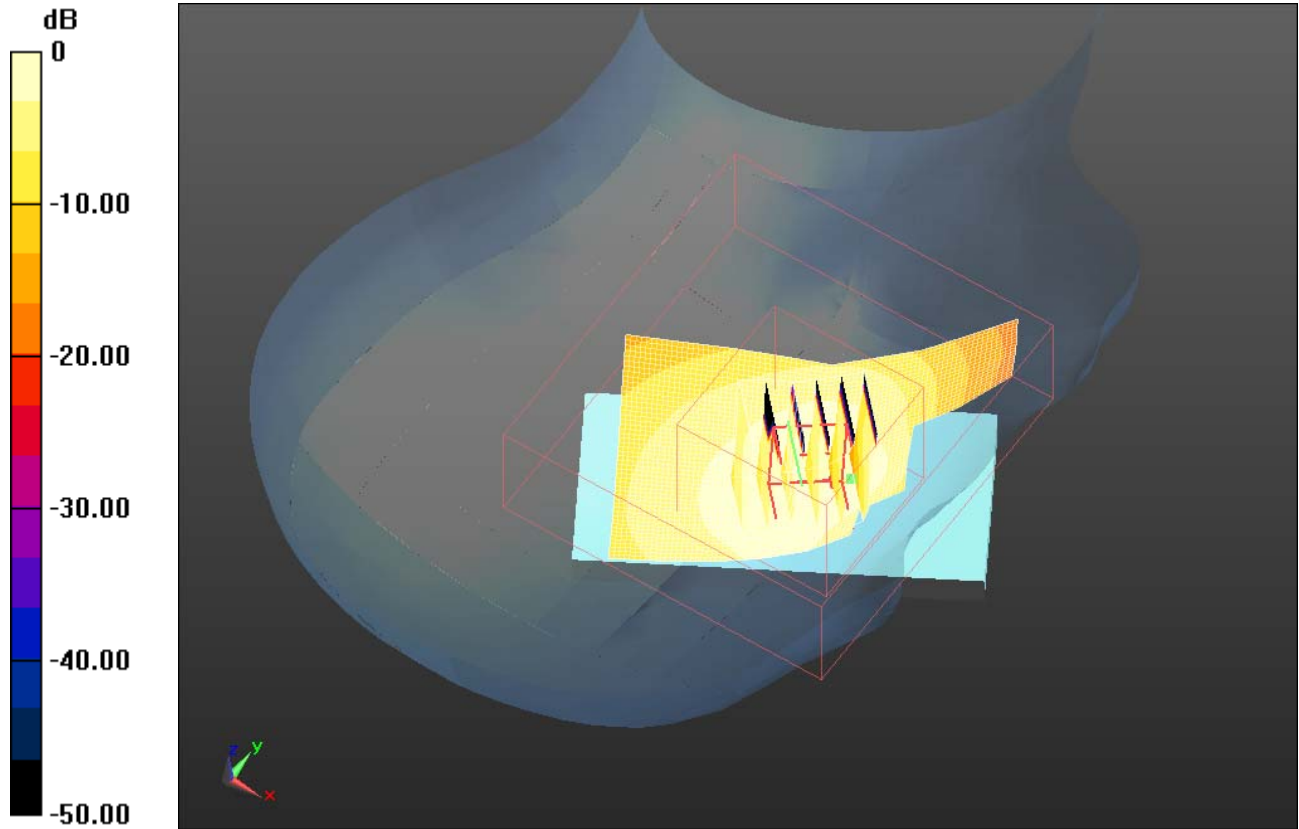

0 dB = 0.420mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 18(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/20/2011 6:02:14 PM, Date/Time: 4/20/2011 6:08:01 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_3_Slots_mid_chan_amb_temp_23.6_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: EDGE 850 (3 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.8

MHz; Communication System PAR: 4.472 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.05$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.385 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (6x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.806 V/m; Power Drift = 0.57 dB

Peak SAR (extrapolated) = 0.664 W/kg


SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.298 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 19(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.411 mW/g

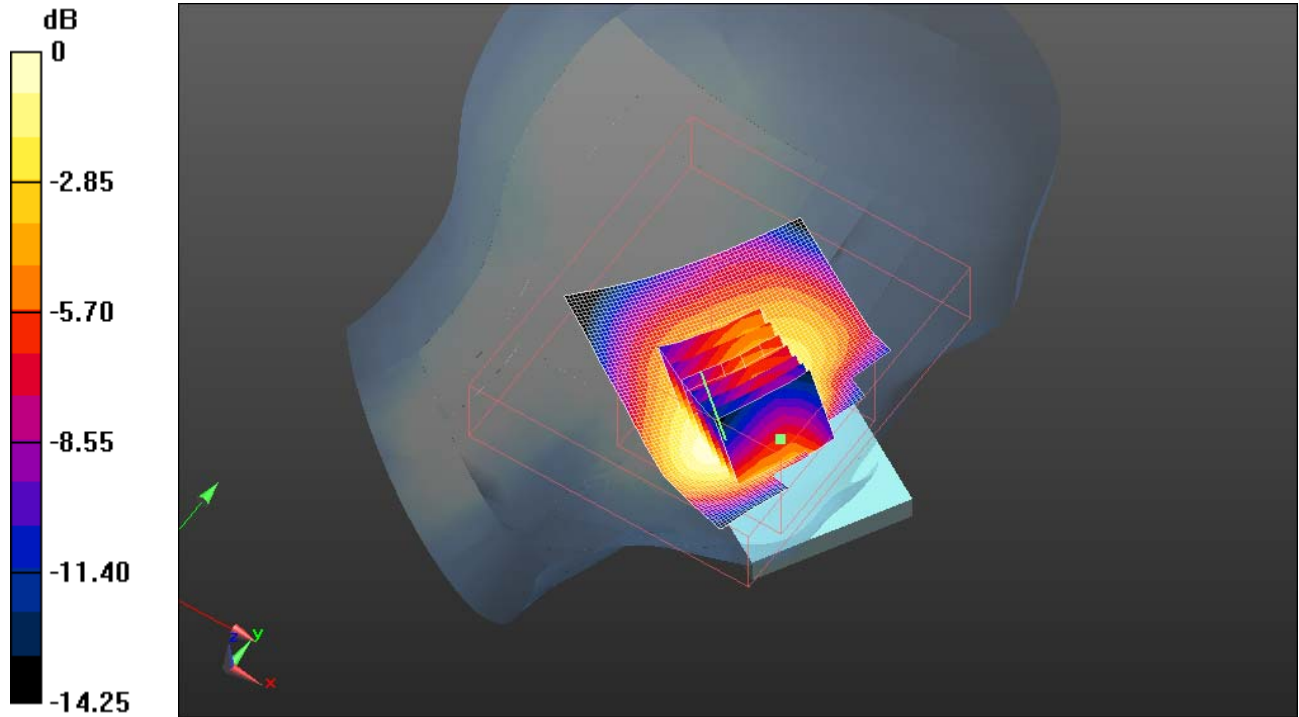

0 dB = 0.410mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 20(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/7/2011 7:43:03 PM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA800_mid_chan_amb_temp_23.5_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.601 mW/g

Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.45 V/m; Power Drift = -0.245 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.400 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.573 mW/g



Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

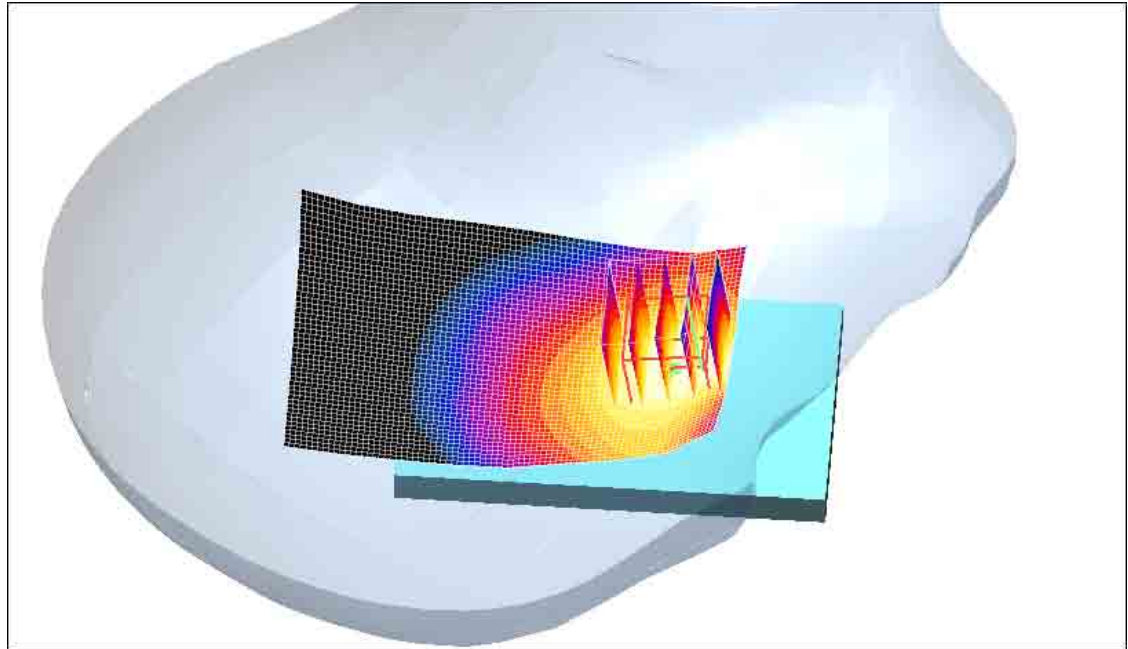

0 dB = 0.573mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 22(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/7/2011 7:58:41 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_CDMA800_mid_chan_amb_temp_23.5_liq_temp_22
.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.363 mW/g

Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.276 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.368 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

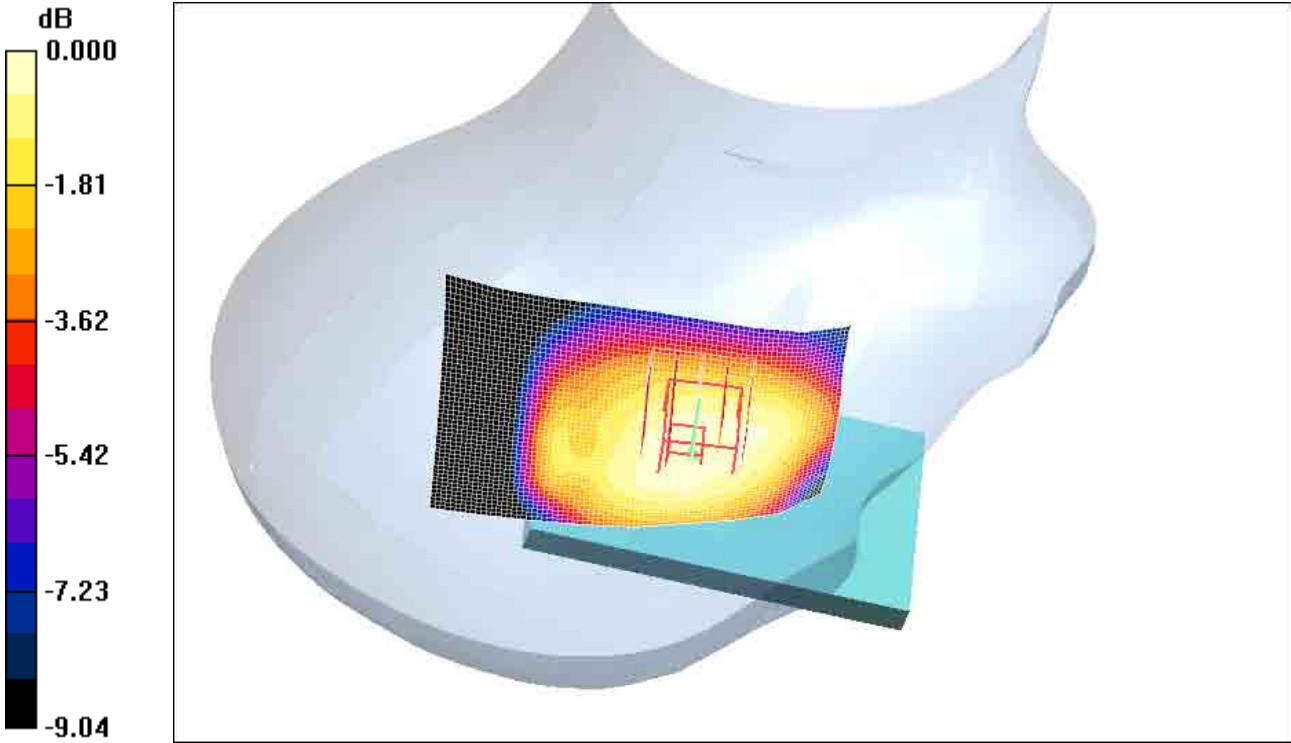

0 dB = 0.368mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 24(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/7/2011 8:13:46 PM

Test Laboratory: RIM Testing Services

LeftHandSide_CDMA800_mid_chan_amb_temp_23.4_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.723 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.62 V/m; Power Drift = -0.232 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.353 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.537 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

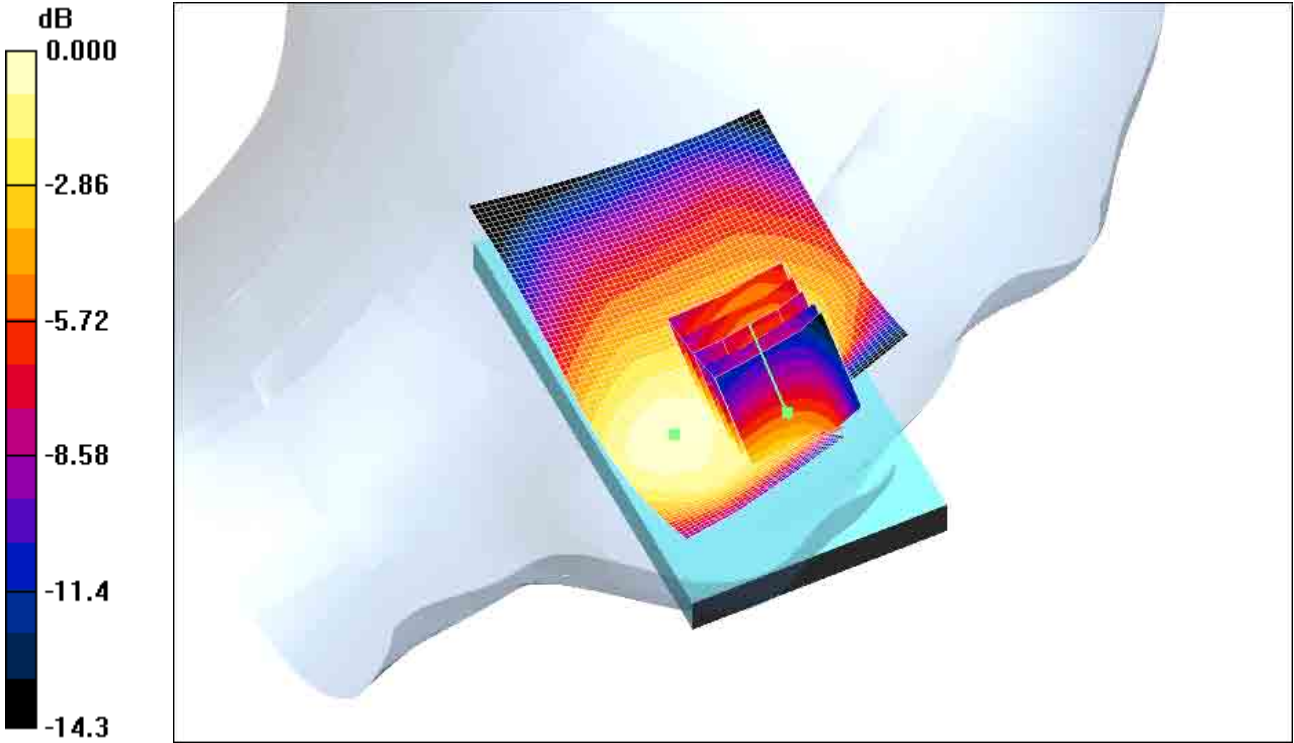

0 dB = 0.537mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 26(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/7/2011 8:31:02 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_CDMA800_mid_chan_amb_temp_23.2_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.345 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.258 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.343 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

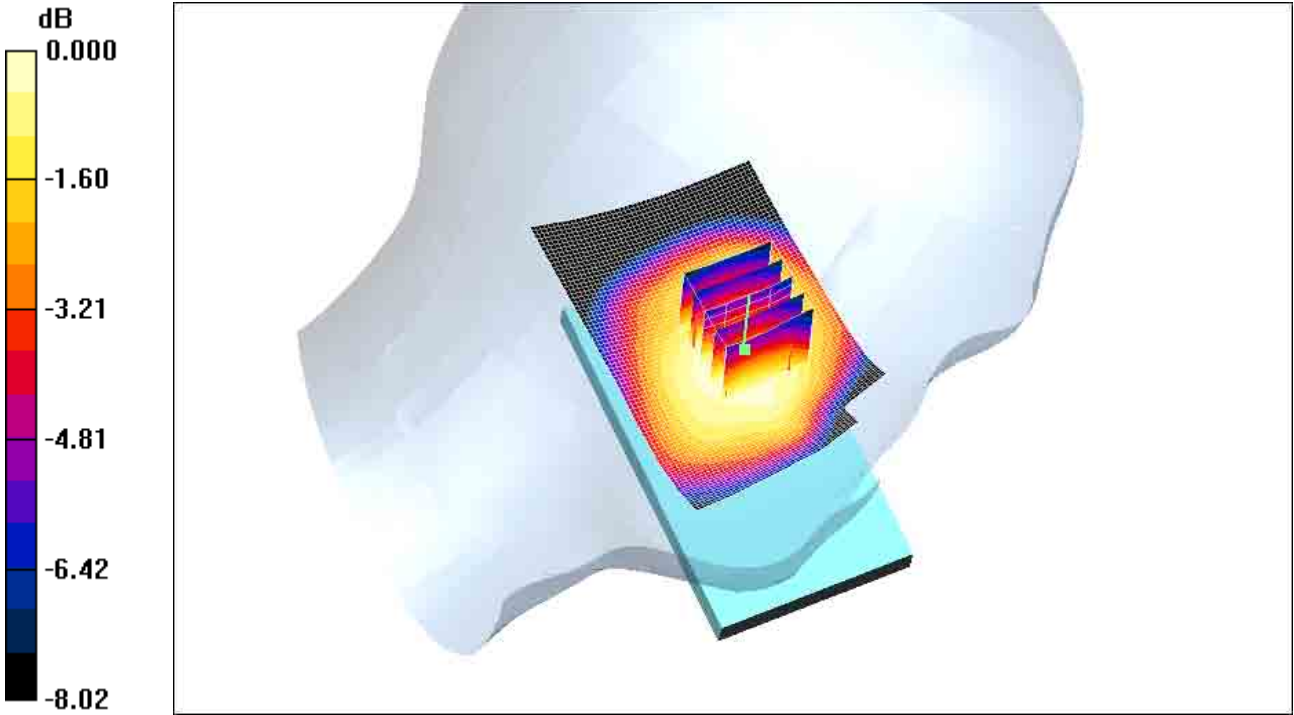

0 dB = 0.343mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 28(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 12:19:39 AM, Date/Time: 4/19/2011 12:24:58 AM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA1900_low_chan_amb_temp_23.0_liq_temp_21.9

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1851.25

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.304$ mho/m; $\epsilon_r = 38.352$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.188 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.464 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.564 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.689 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 29(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.182 mW/g

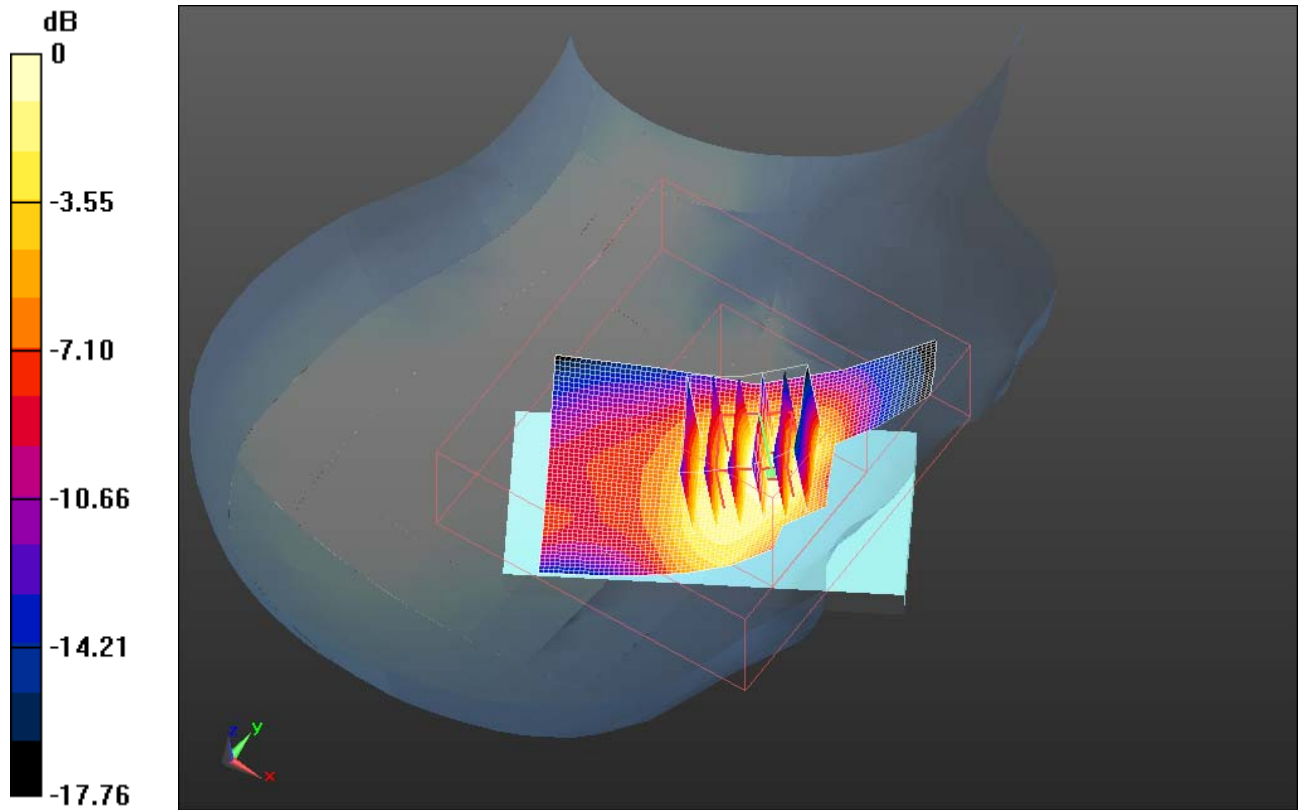

0 dB = 1.180mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 30(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 12:05:54 AM, Date/Time: 4/19/2011 12:11:13 AM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA1900_mid_chan_amb_temp_23.1_liq_temp_22.0

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.283 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.474 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.551 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.702 mW/g

Maximum value of SAR (measured) = 1.225 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

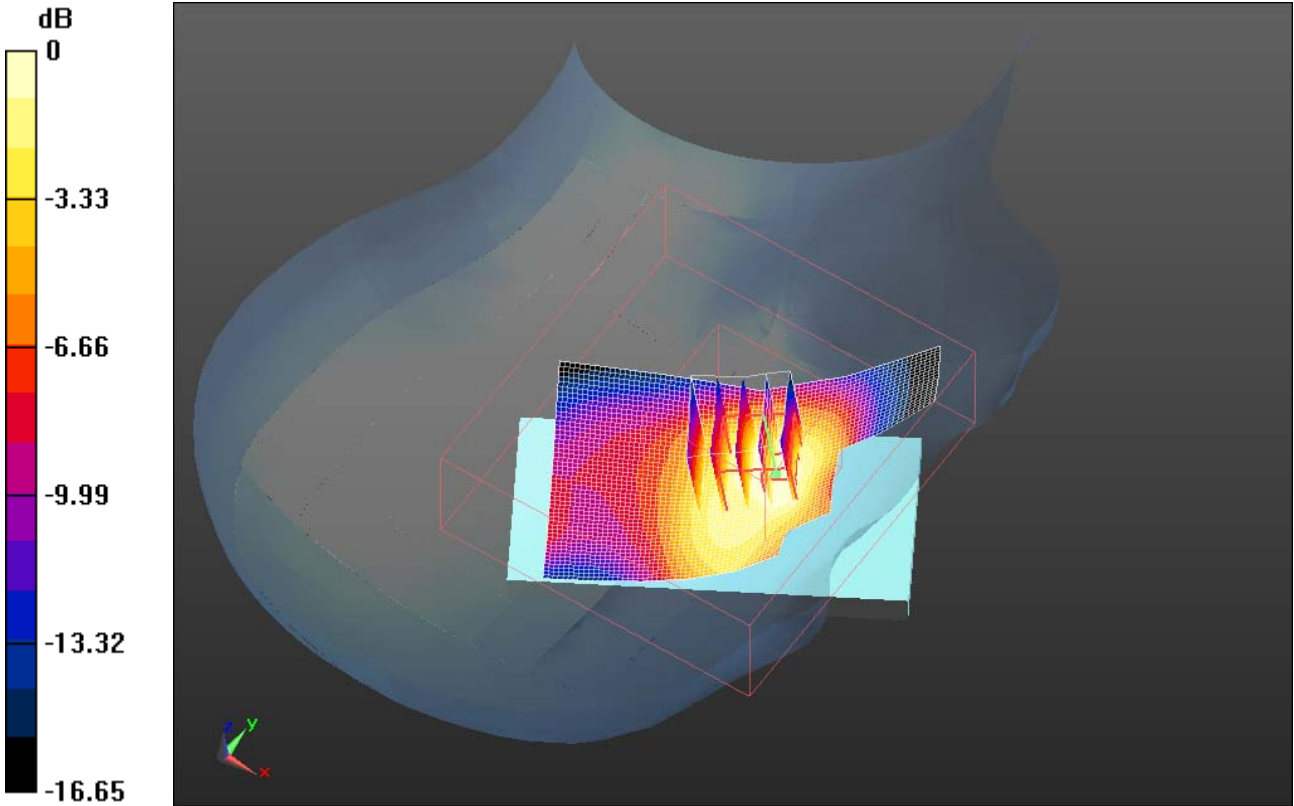

0 dB = 1.220mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 32(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 12:35:15 AM, Date/Time: 4/19/2011 12:40:35 AM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA1900_high_chan_amb_temp_23.0_liq_temp_21.9

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1908.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1908.5$ MHz; $\sigma = 1.396$ mho/m; $\epsilon_r = 38.197$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.208 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.366 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.465 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.645 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 33(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.142 mW/g

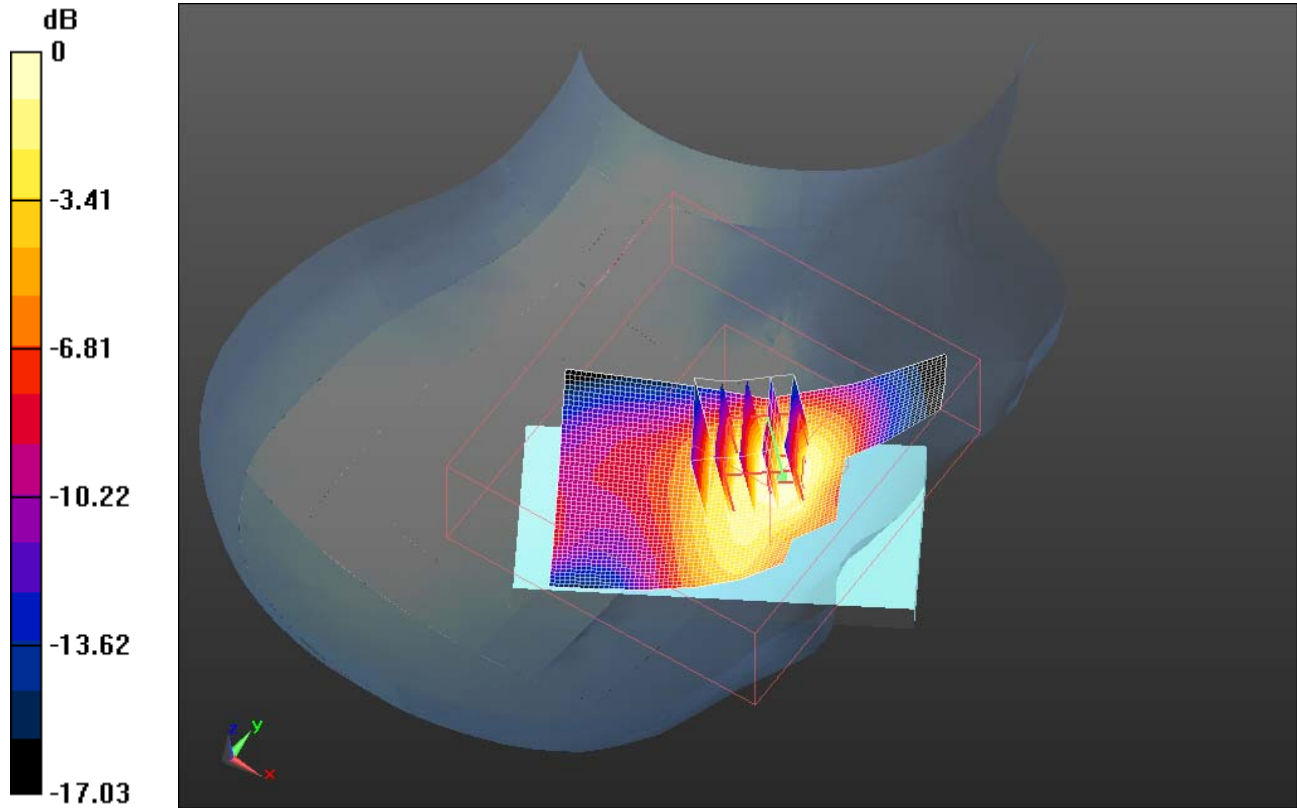

0 dB = 1.140mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 34(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 12:49:36 AM, Date/Time: 4/19/2011 12:54:43 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_CDMA1900_mid_chan_amb_temp_23.0_liq_temp_2 1.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.511 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.020 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.462 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

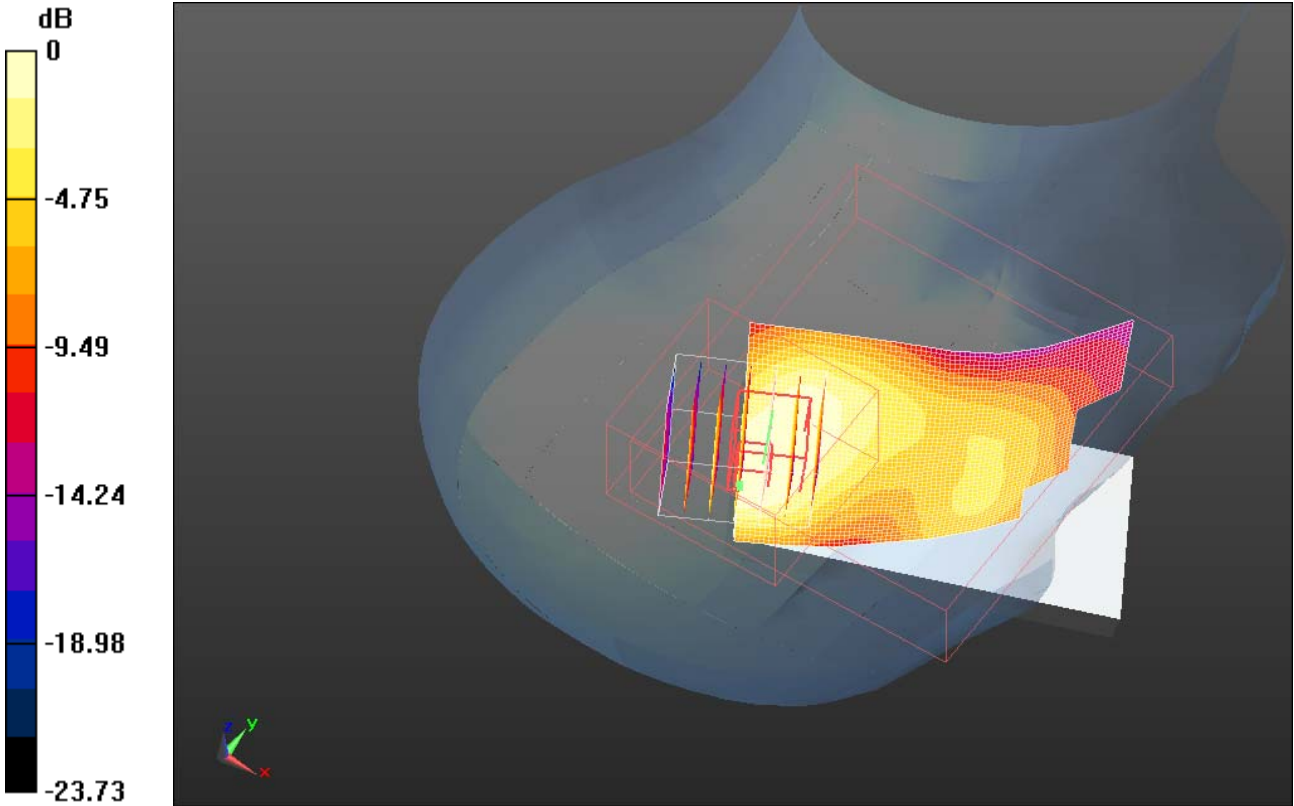

0 dB = 0.460mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 36(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 1:25:59 AM, Date/Time: 4/19/2011 1:33:06 AM, Date/Time: 4/19/2011 1:42:09 AM

Test Laboratory: RIM Testing Services

LeftHandSide_CDMA1900_low_chan_amb_temp_22.9_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1851.25

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.304$ mho/m; $\epsilon_r = 38.352$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.363 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.380 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.016 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.646 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.269 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 37(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x7x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.380 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.015 W/kg
SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.639 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.255 mW/g

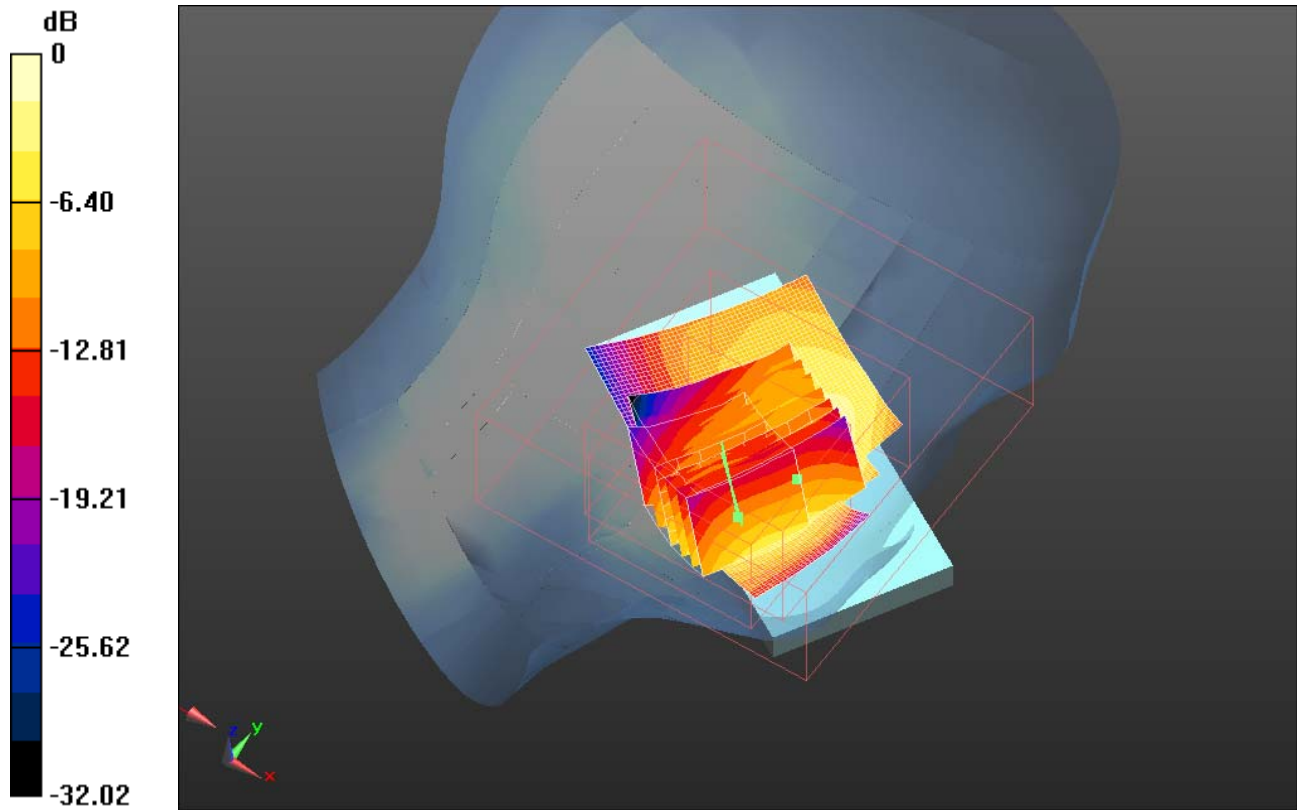

0 dB = 1.250mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 38(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 1:10:34 AM, Date/Time: 4/19/2011 1:15:35 AM

Test Laboratory: RIM Testing Services

LeftHandSide_CDMA1900_mid_chan_amb_temp_23.0_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.496 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.077 V/m; Power Drift = -0.28 dB

Peak SAR (extrapolated) = 2.311 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.695 mW/g

Maximum value of SAR (measured) = 1.422 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

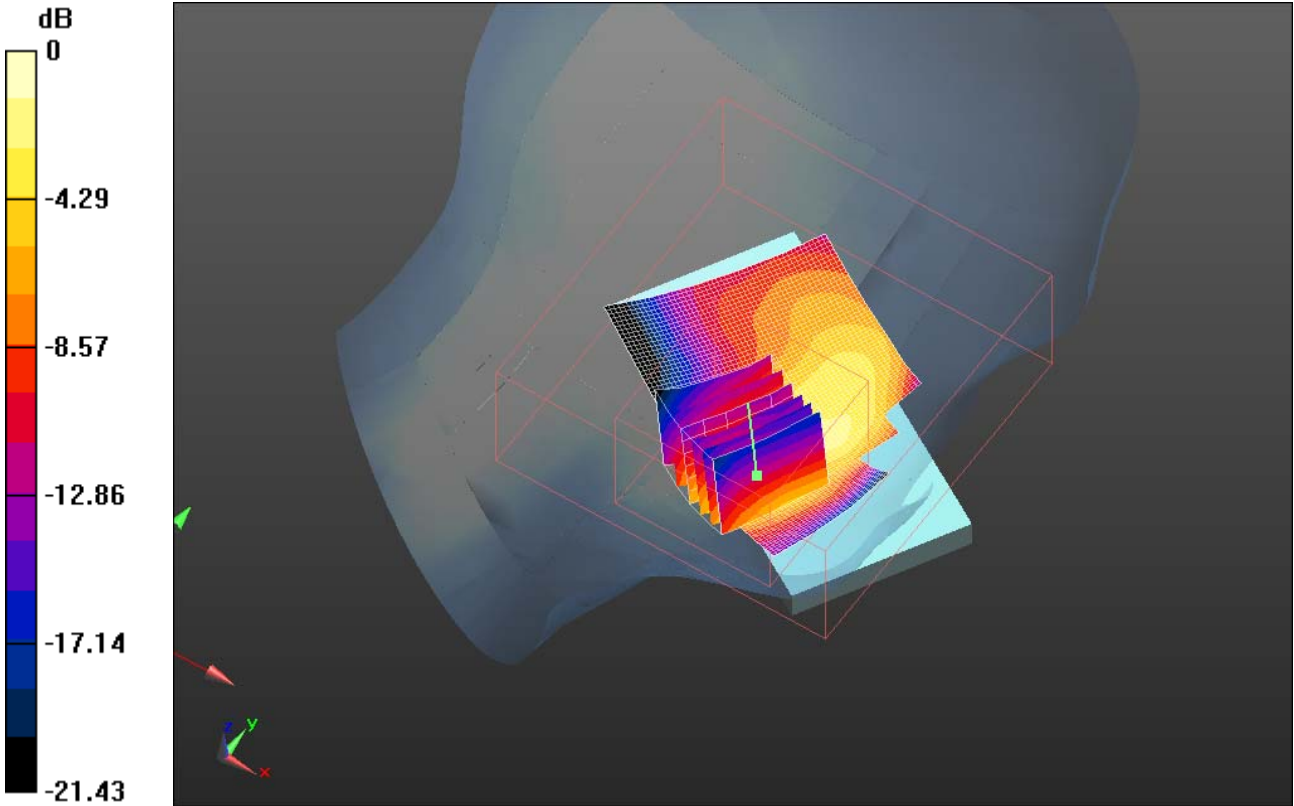

0 dB = 1.420mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 40(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 1:57:56 AM, Date/Time: 4/19/2011 2:02:55 AM

Test Laboratory: RIM Testing Services

LeftHandSide_CDMA1900_high_chan_amb_temp_23.1_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1908.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1908.5$ MHz; $\sigma = 1.396$ mho/m; $\epsilon_r = 38.197$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.345 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.495 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.151 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.623 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.327 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

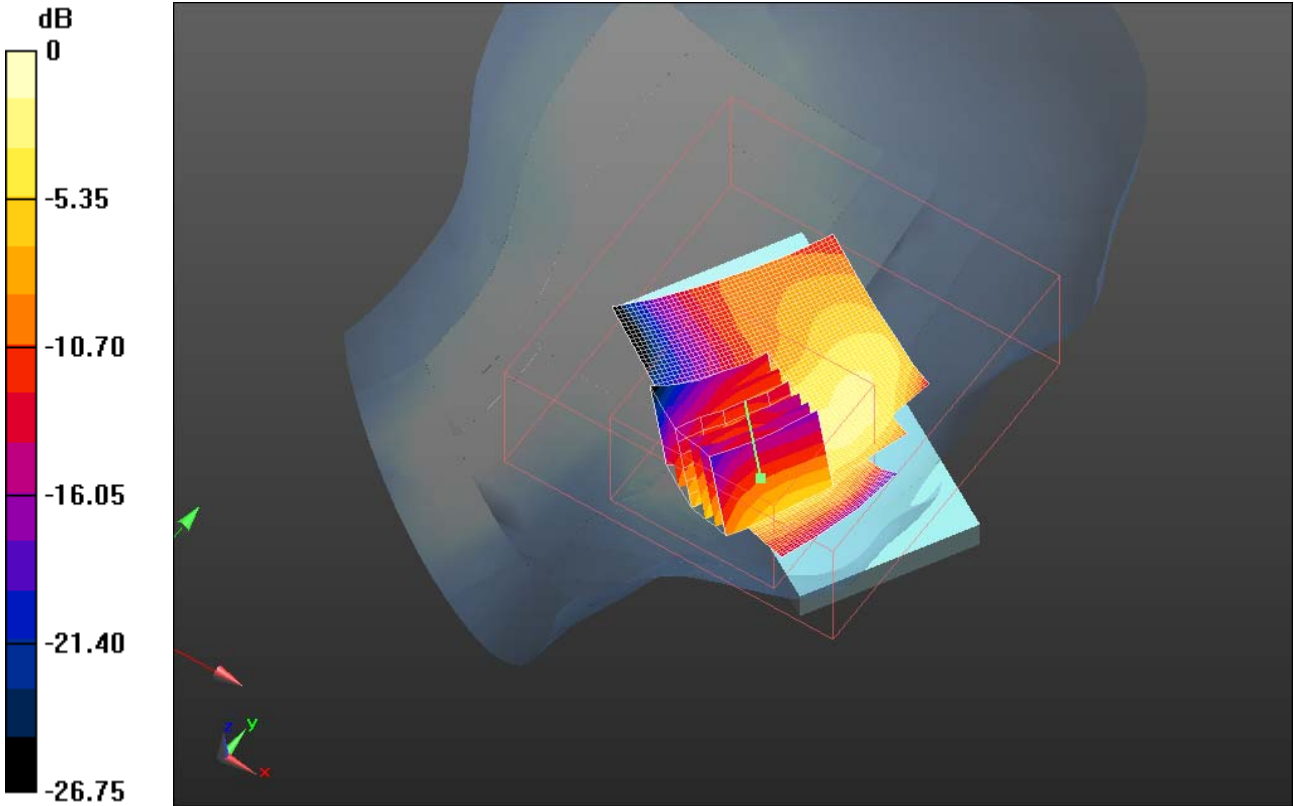

0 dB = 1.330mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 42(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 2:15:08 AM, Date/Time: 4/19/2011 2:20:11 AM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_CDMA1900_mid_chan_amb_temp_23.2_liq_temp_22
.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.676 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.271 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.356 mW/g

Maximum value of SAR (measured) = 0.595 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

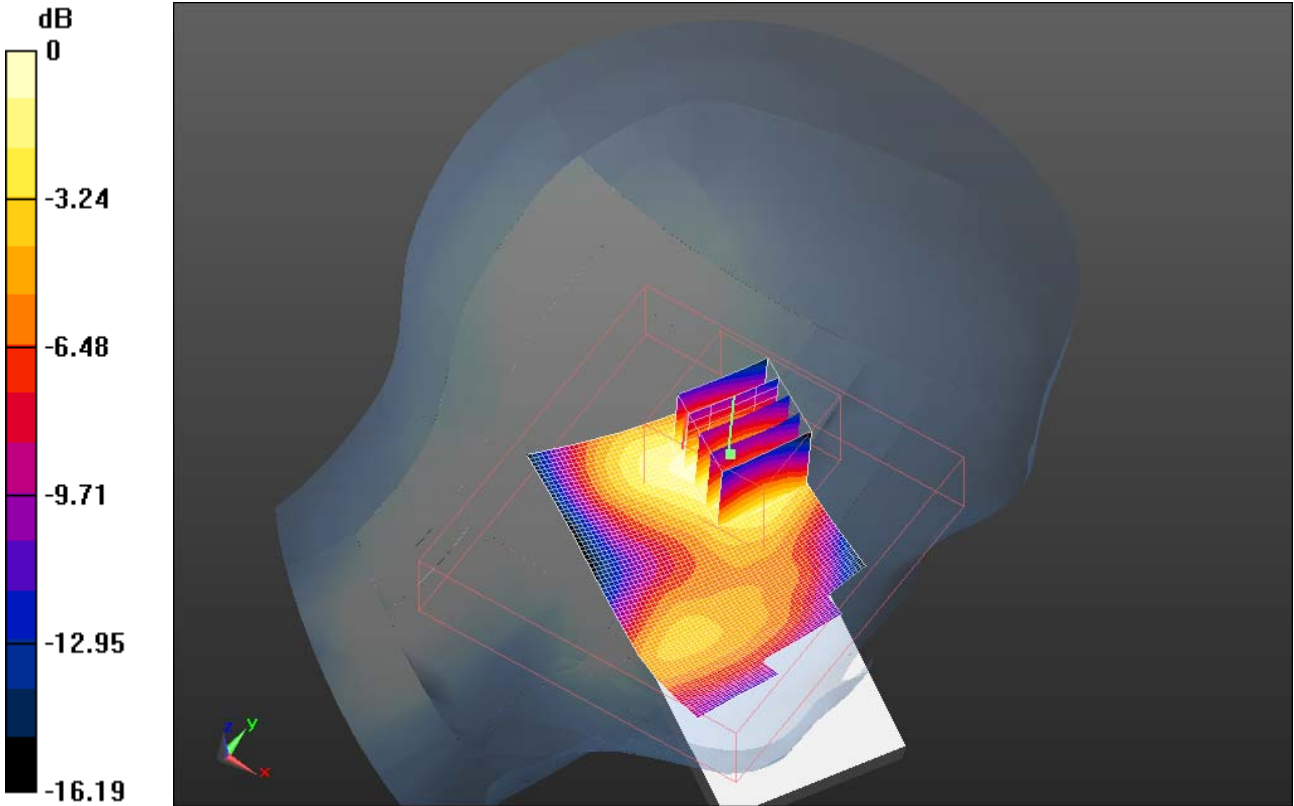

0 dB = 0.590mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 44(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/20/2011 6:52:33 PM, Date/Time: 4/20/2011 6:57:53 PM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA800_mid_chan_amb_temp_23.6_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: CDMA 800; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.52

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.054$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.562 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.643 V/m; Power Drift = -0.77 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.495 mW/g; SAR(10 g) = 0.389 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.518 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

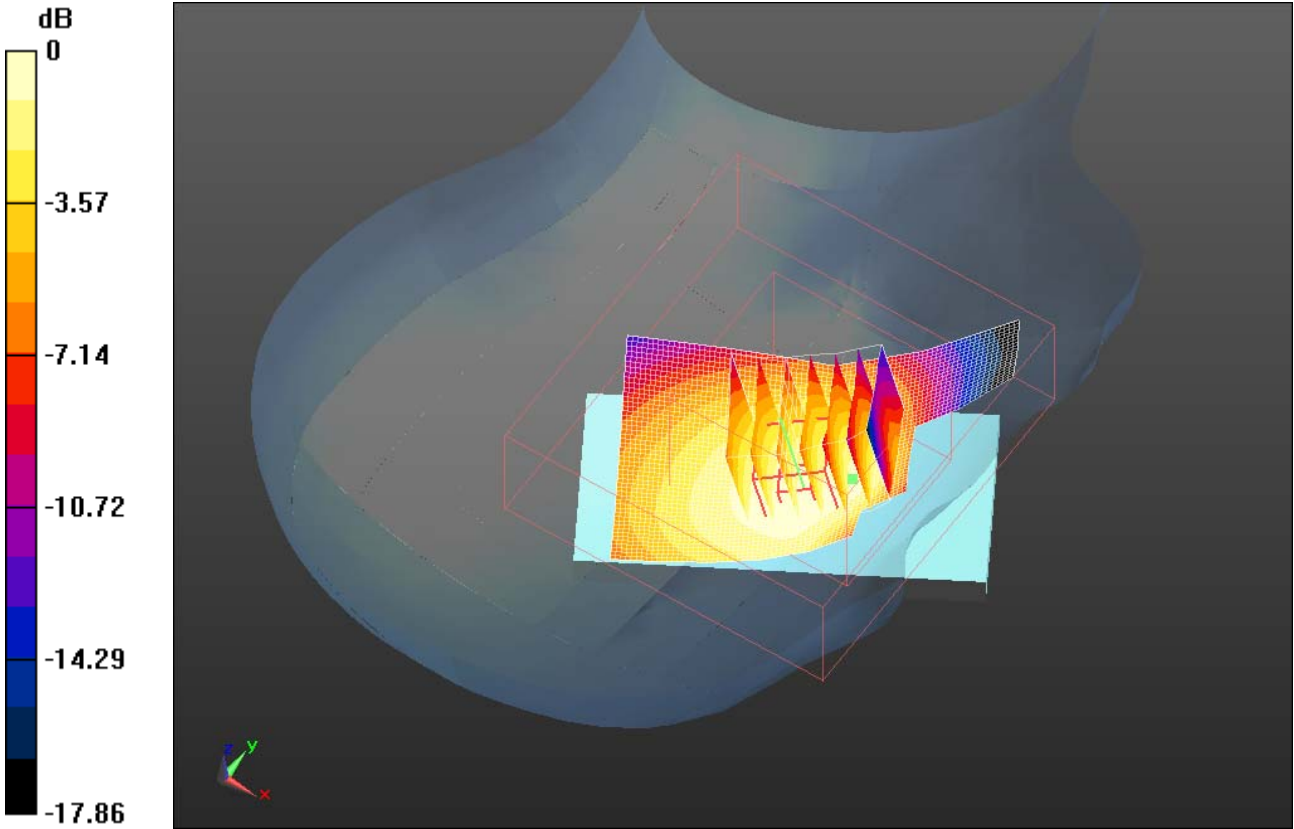

0 dB = 0.520mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 46(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/20/2011 6:22:14 PM, Date/Time: 4/20/2011 6:28:01 PM, Date/Time: 4/20/2011 6:34:11 PM

Test Laboratory: RIM Testing Services

LeftHandSide_CDMA800_mid_chan_amb_temp_23.6_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: CDMA 800; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 836.52

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.054$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.572 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.247 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.409 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.546 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 47(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.247 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.866 W/kg
SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.334 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.545 mW/g

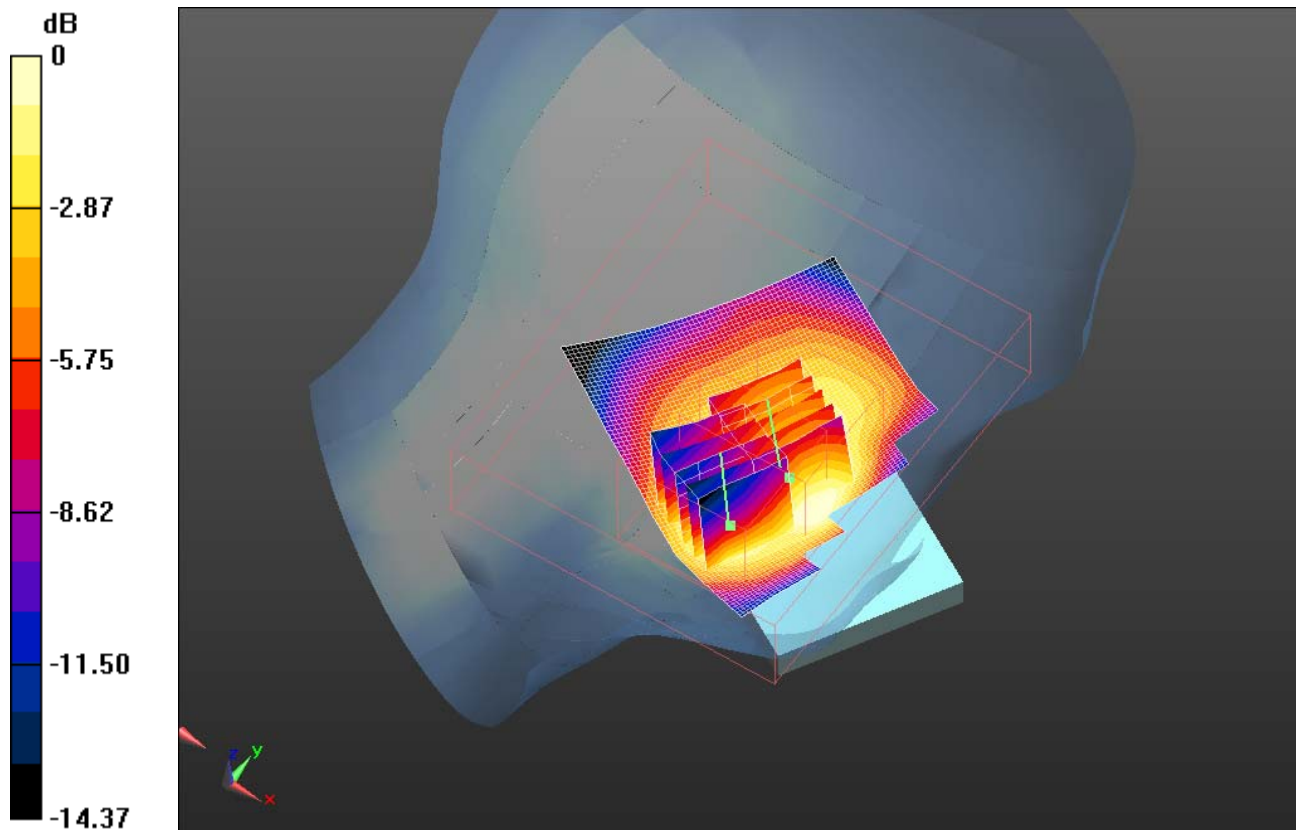

0 dB = 0.540mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 48(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 8:58:23 PM, Date/Time: 2/25/2011 9:03:55 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_4_Slots_mid_chan_amb_temp_23.0_liq_temp_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900(4 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 3.222 dB
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.944 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.118 V/m; Power Drift = 0.26 dB
Peak SAR (extrapolated) = 1.184 W/kg
SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.547 mW/g
Maximum value of SAR (measured) = 0.980 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

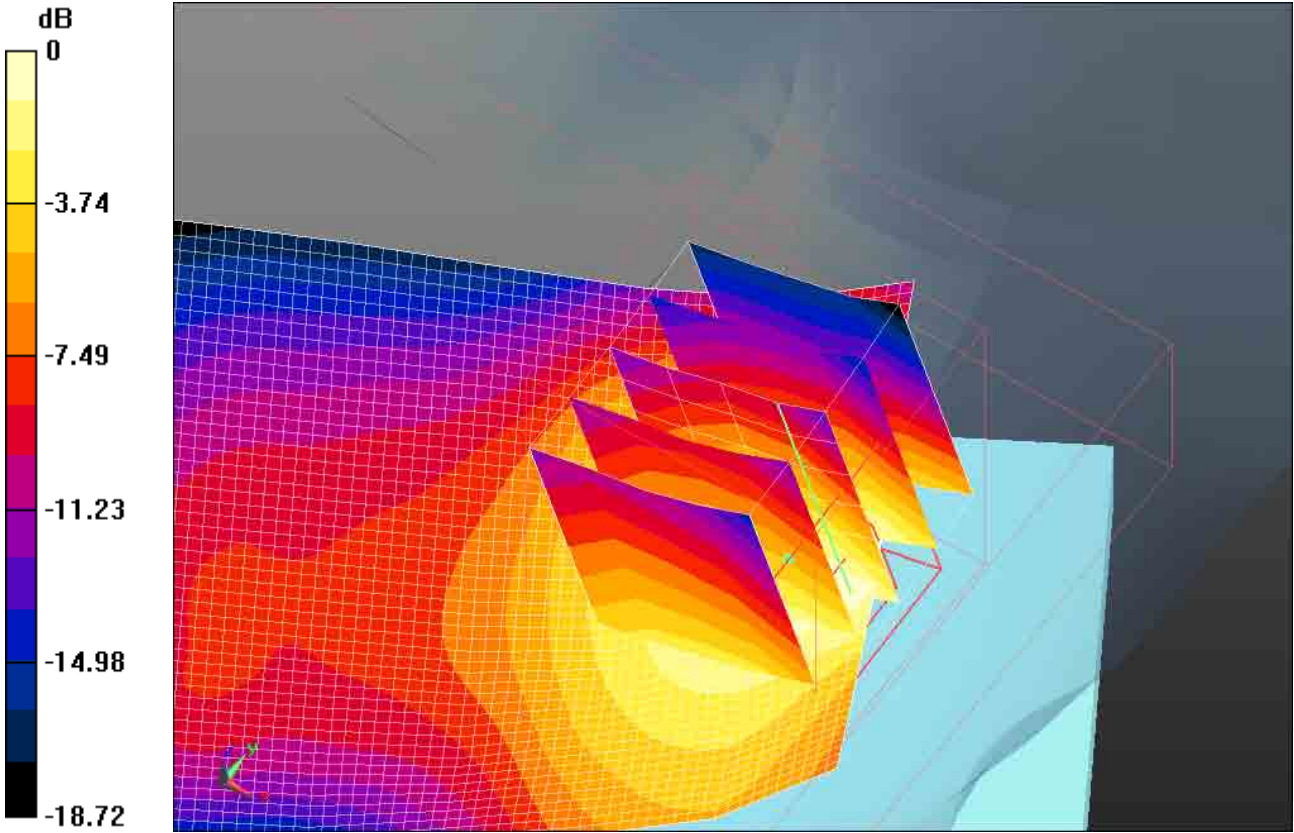

0 dB = 0.980mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 50(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 8:37:07 PM, Date/Time: 2/25/2011 8:49:52 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE1900_3_Slots_mid_chan_amb_temp_23.1_liq_tem
mp_21.8C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900(3 slots); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 4.472 dB
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.876 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.726 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.107 W/kg
SAR(1 g) = 0.853 mW/g; SAR(10 g) = 0.525 mW/g
Maximum value of SAR (measured) = 0.923 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

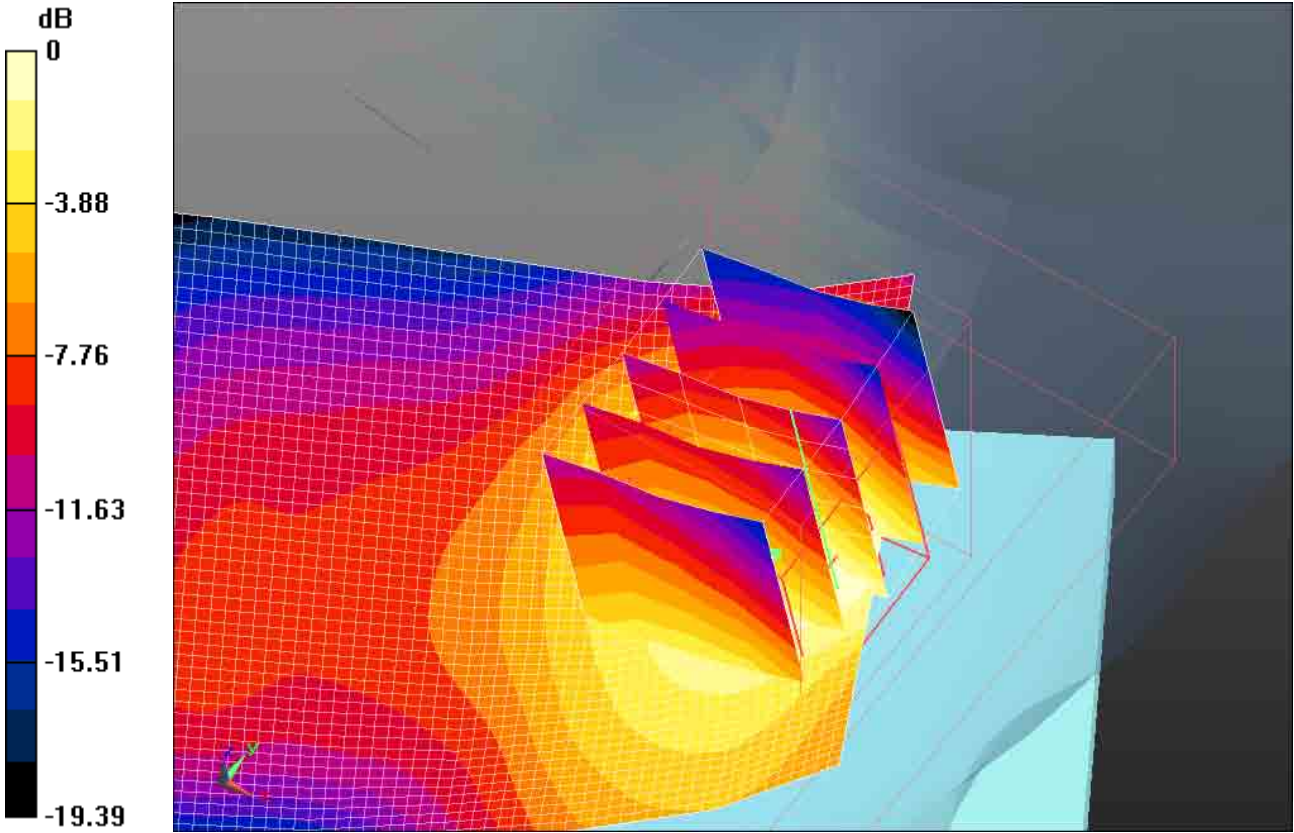

0 dB = 0.920mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 52(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 5:32:53 PM, Date/Time: 2/25/2011 5:38:24 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_low_chan_amb_temp_23.0_liq_temp_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1850.2

MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.282$ mho/m; $\epsilon_r = 38.52$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.063 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.106 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.370 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.633 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.136 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

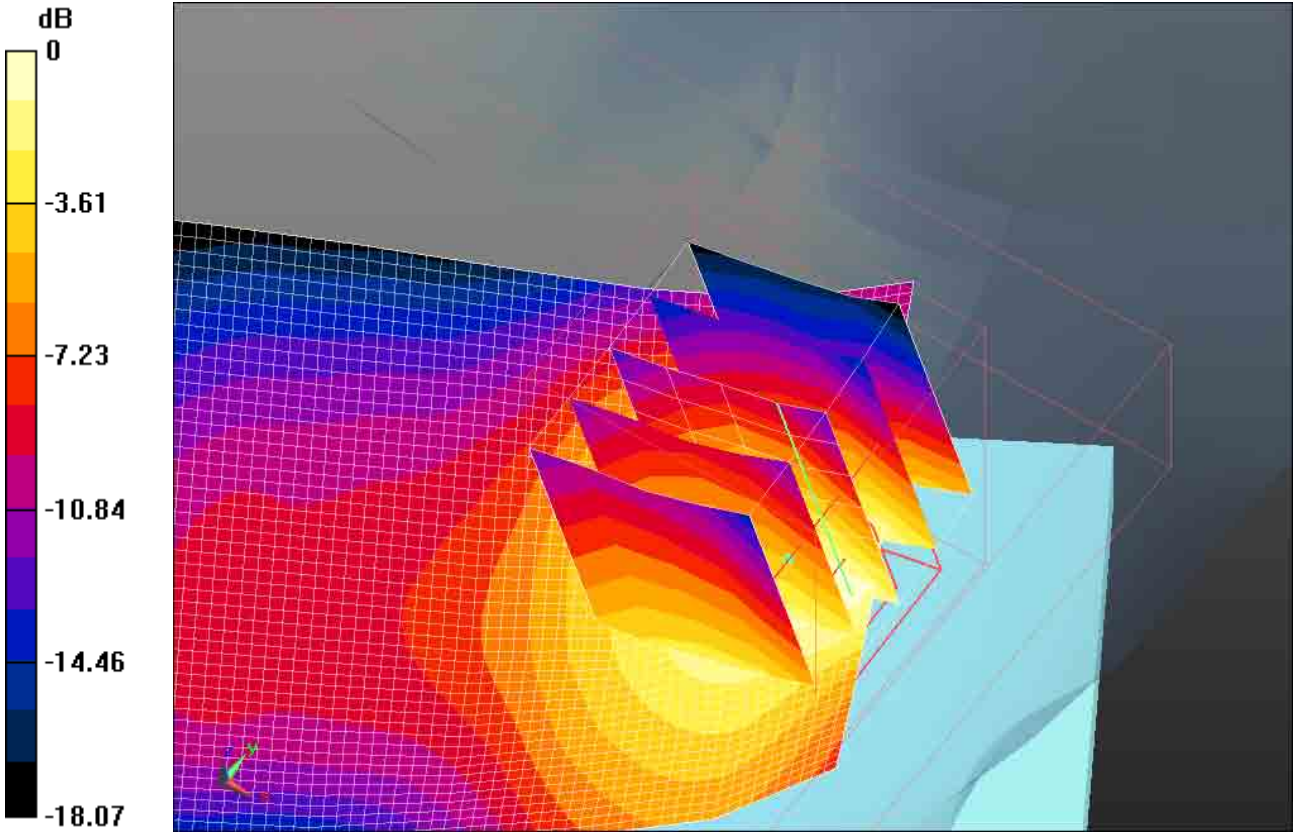

0 dB = 1.140mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 54(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 5:20:05 PM, Date/Time: 2/25/2011 5:25:37 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_mid_chan_amb_temp_23.1_liq_temp_21.8

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.312 \text{ mho/m}$; $\epsilon_r = 38.485$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.248 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.118 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.458 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.690 mW/g

Maximum value of SAR (measured) = 1.206 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

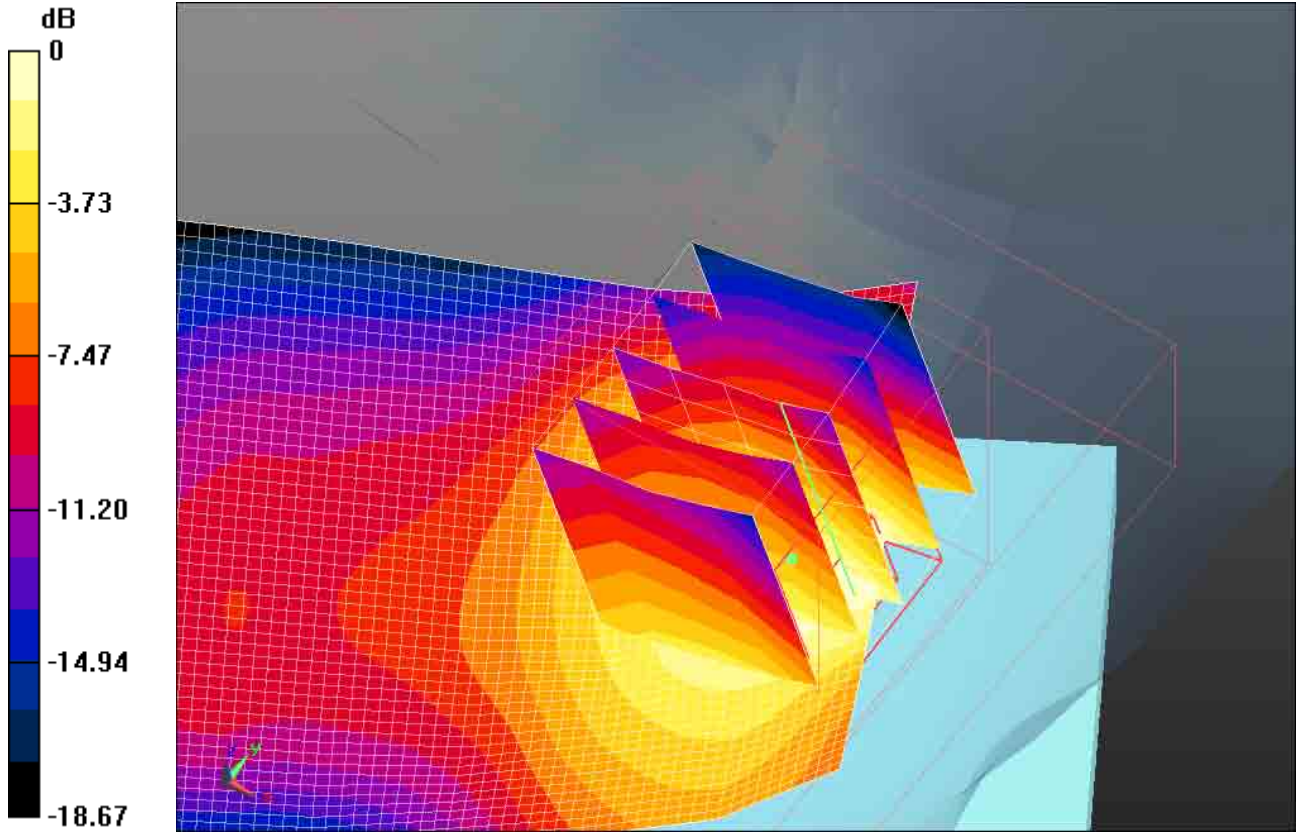

0 dB = 1.210mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 56(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 5:49:13 PM, Date/Time: 2/25/2011 5:54:45 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_high_chan_amb_temp_23.2_liq_temp_21.9

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1909.8

MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.437$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.149 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.496 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.408 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.678 mW/g

Maximum value of SAR (measured) = 1.185 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

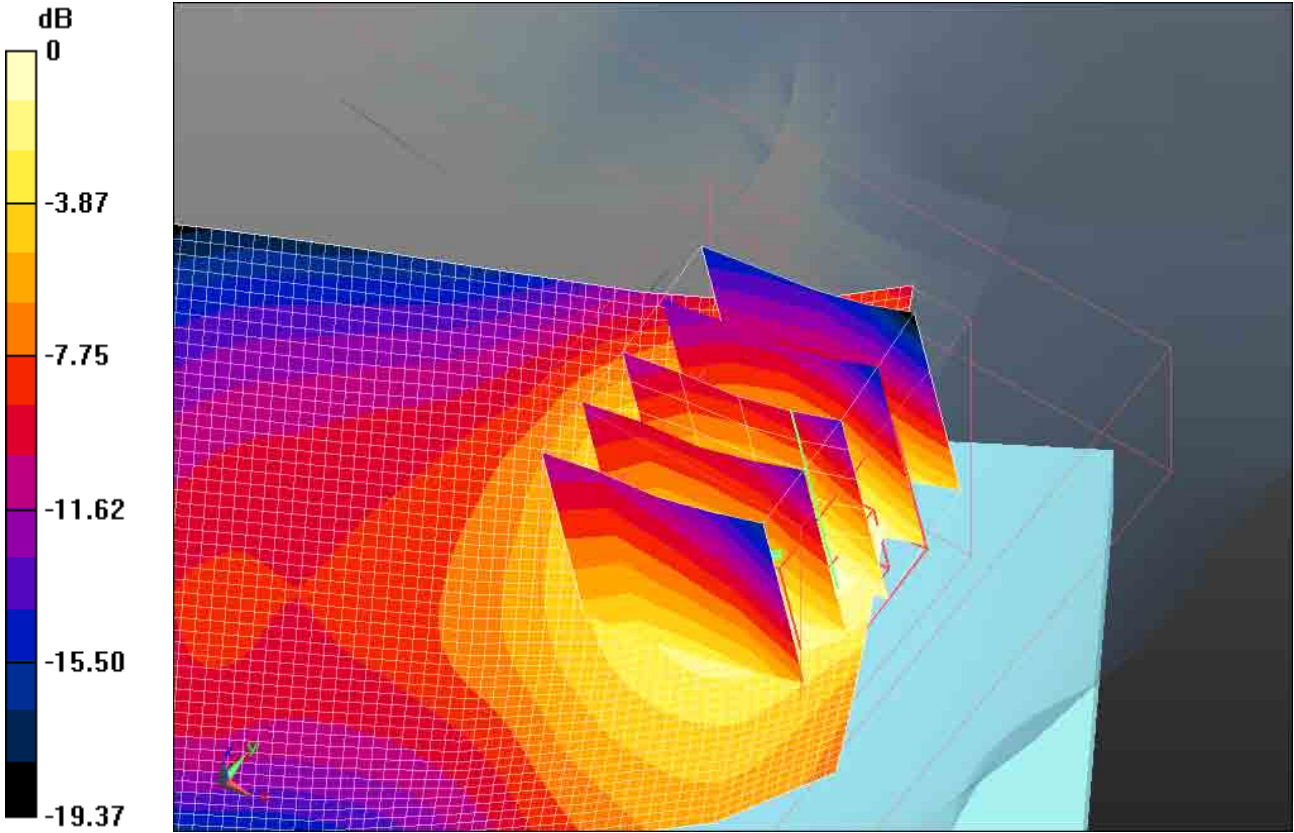

0 dB = 1.180mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 58(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 6:03:59 PM, Date/Time: 2/25/2011 6:09:28 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_EDGE1900_mid_chan_amb_temp_23.2_liq_temp_2 1.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.400 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 17.427 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.459 W/kg


SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.378 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 59(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

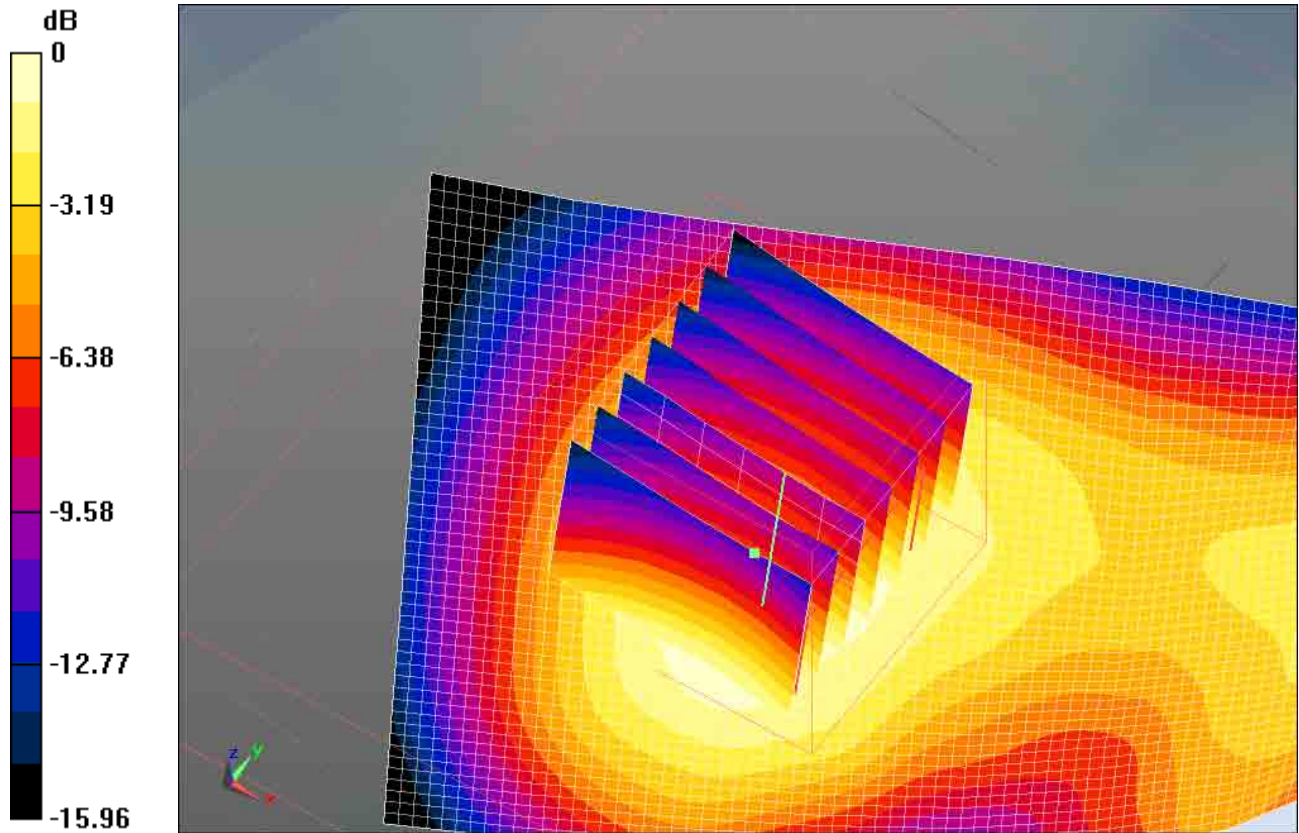

0 dB = 0.380mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 60(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 9:32:46 PM, Date/Time: 2/25/2011 9:38:31 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_low_chan_amb_temp_23.2_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.930 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.059 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.454 W/kg

SAR(1 g) = 0.854 mW/g; SAR(10 g) = 0.477 mW/g

Maximum value of SAR (measured) = 0.966 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

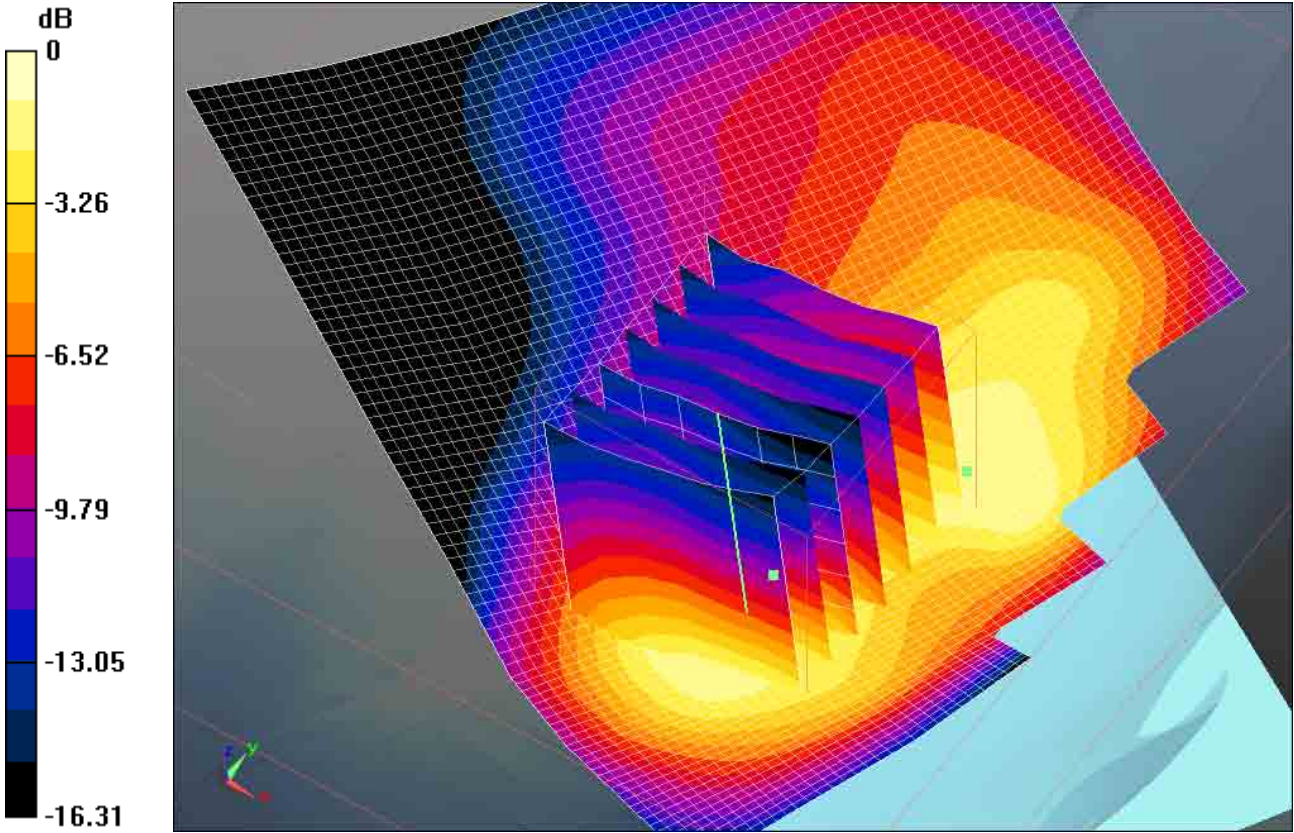

0 dB = 0.970mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 62(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 8:20:26 PM, Date/Time: 2/25/2011 8:26:29 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_mid_chan_amb_temp_23.0_liq_temp_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.025 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.547 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.543 W/kg

SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.491 mW/g

Maximum value of SAR (measured) = 0.998 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

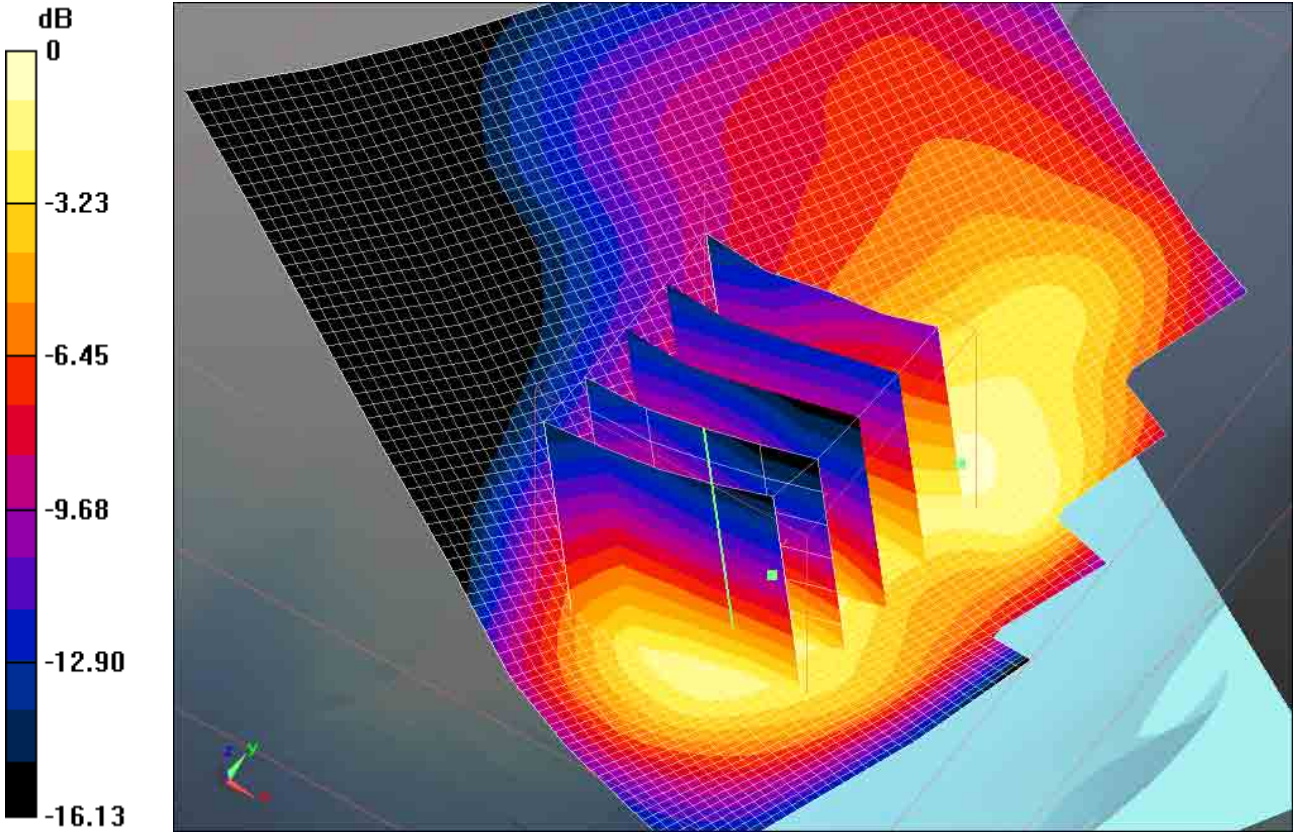

0 dB = 1.000mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 64(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 9:51:42 PM, Date/Time: 2/25/2011 9:57:27 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_high_chan_amb_temp_23.2_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1909.8

MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.437$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.873 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.184 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.394 W/kg

SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 0.925 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

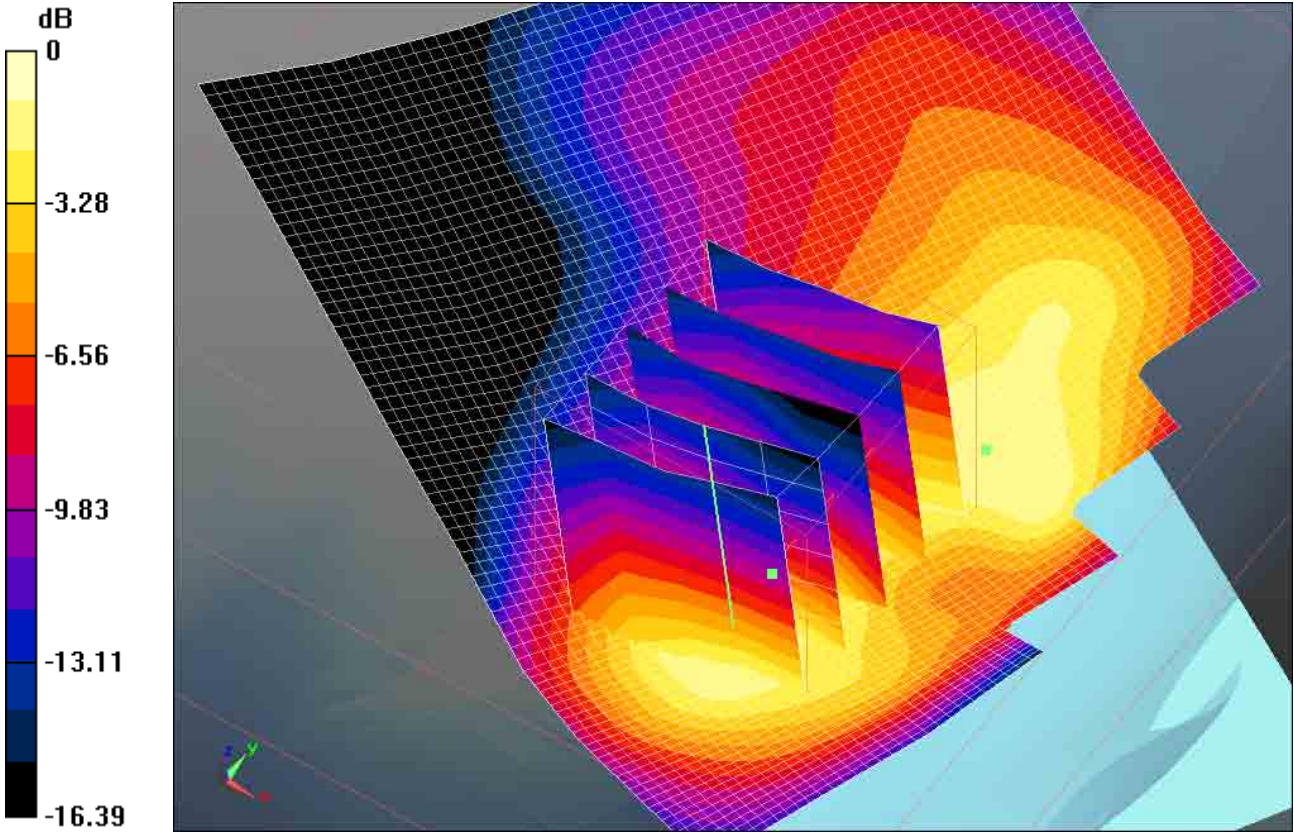

0 dB = 0.930mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 66(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/25/2011 10:07:27 PM, Date/Time: 2/25/2011 10:29:08 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE1900_mid_chan_amb_temp_23.1_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.312 \text{ mho/m}$; $\epsilon_r = 38.485$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.674 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.641 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.559 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

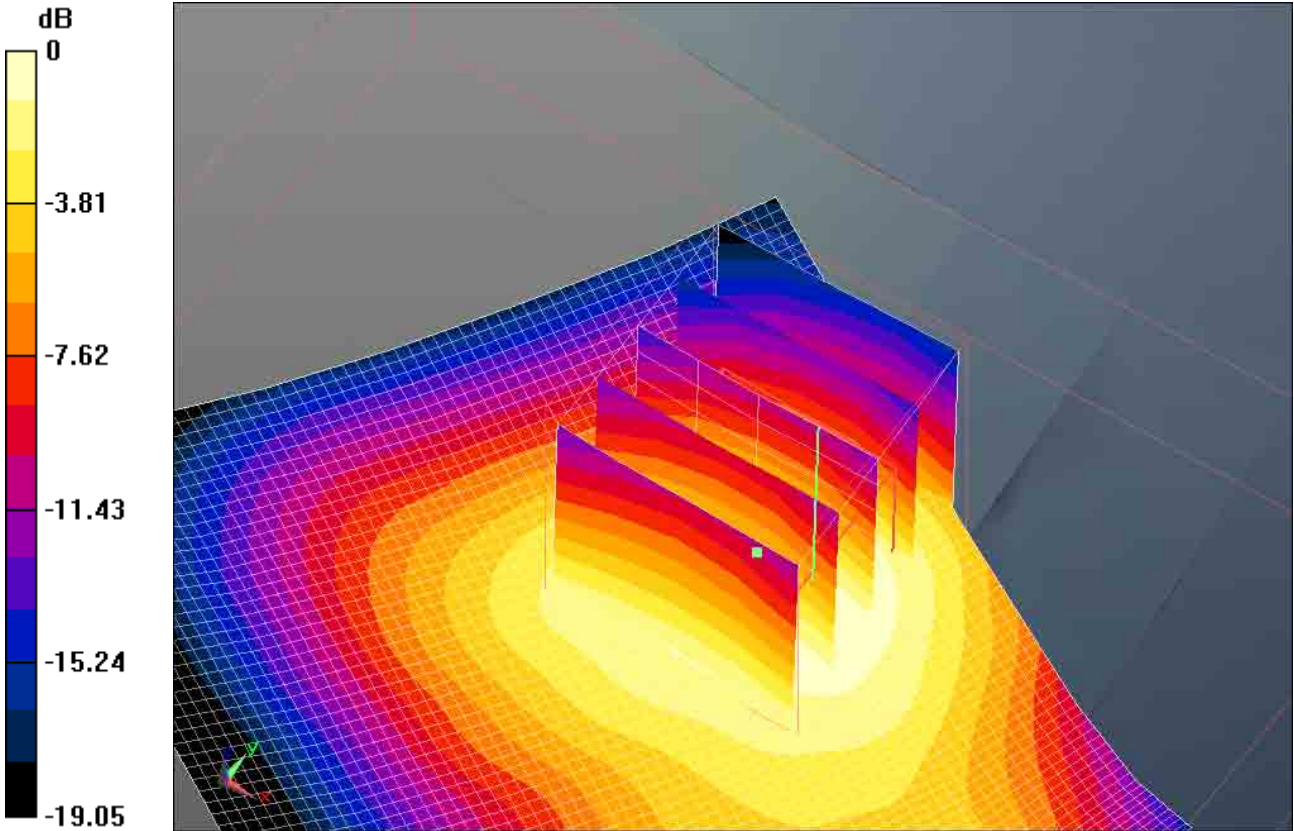

0 dB = 0.560mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 68(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 6:58:17 PM, Date/Time: 4/19/2011 7:03:36 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_mid_chan_amb_temp_23.5_liq_temp_22.3

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.892 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.439 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.058 W/kg

SAR(1 g) = 0.767 mW/g; SAR(10 g) = 0.487 mW/g

Maximum value of SAR (measured) = 0.836 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

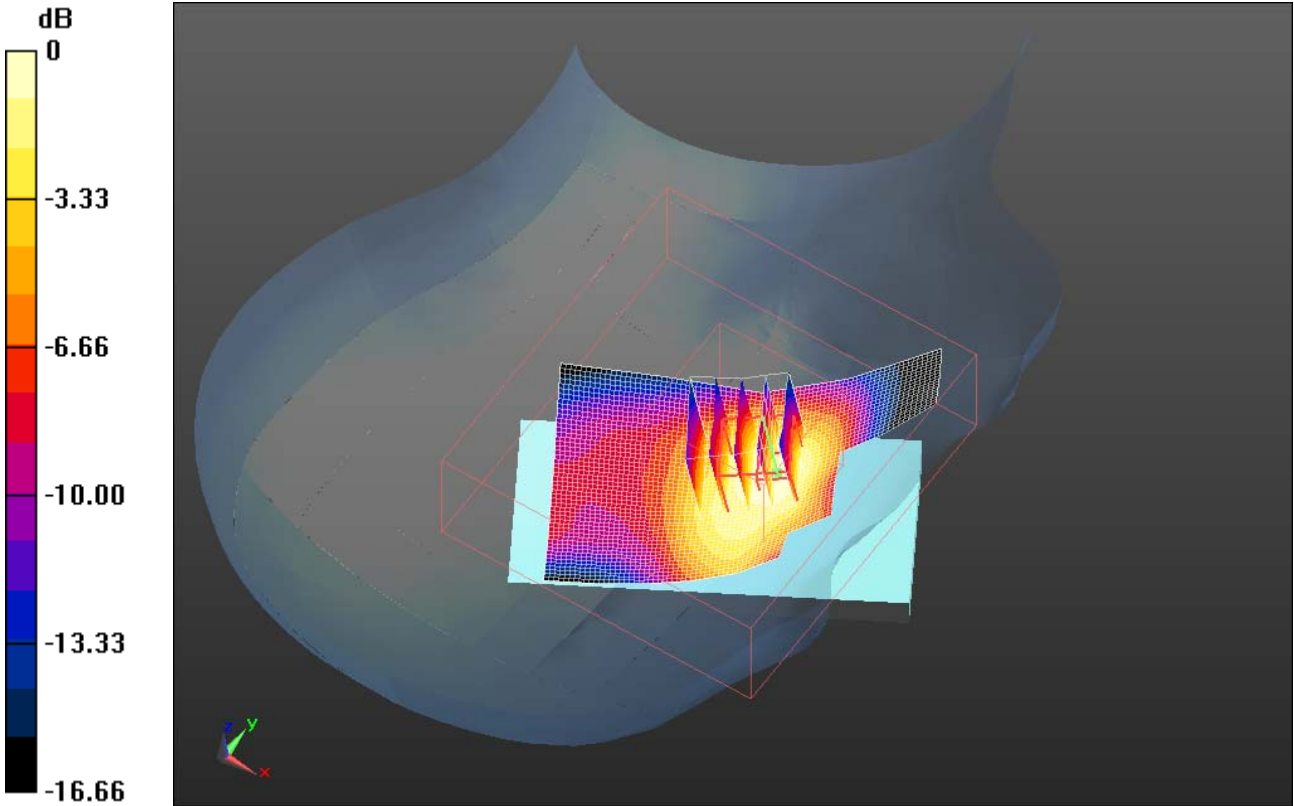

0 dB = 0.840mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 70(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 7:14:34 PM, Date/Time: 4/19/2011 7:19:33 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_mid_chan_amb_temp_23.2_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: EDGE 1900; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.774 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.089 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.180 W/kg

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.740 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

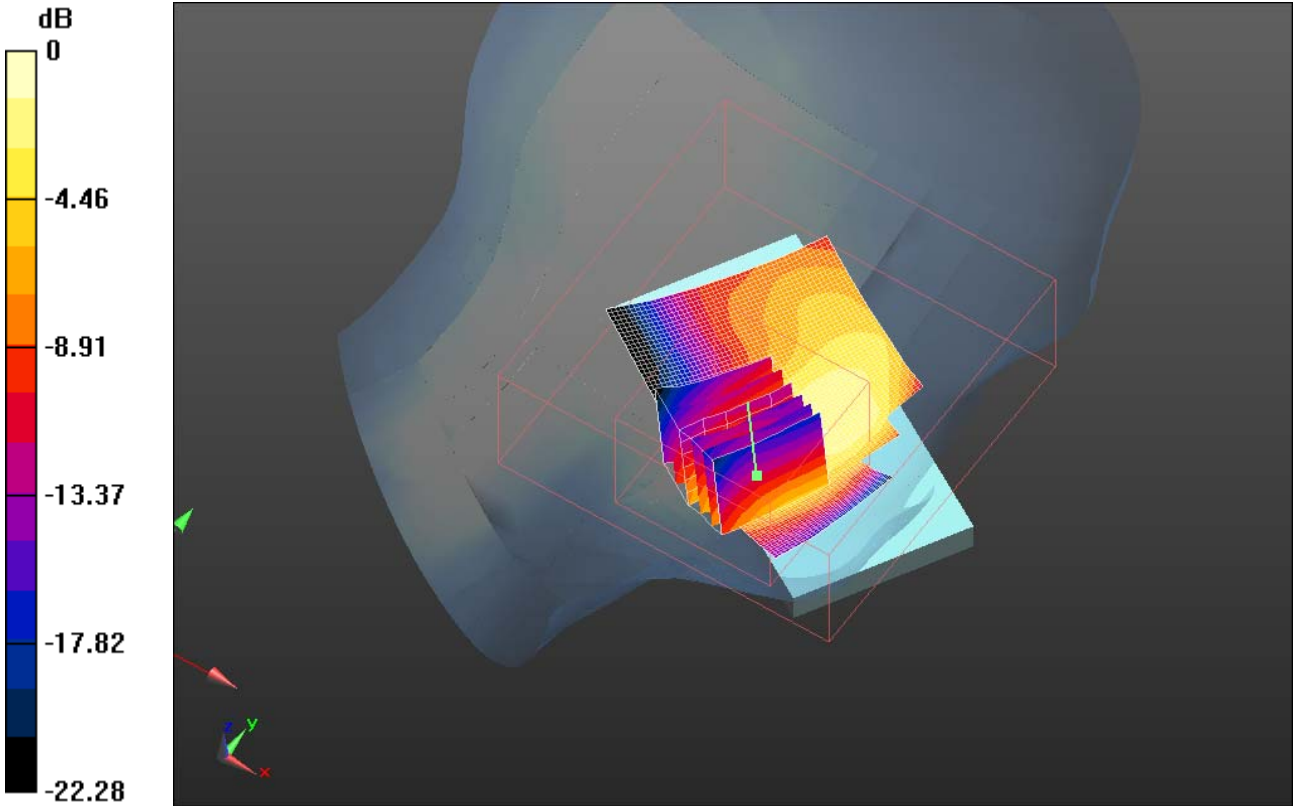

0 dB = 0.740mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 72(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/3/2011 5:55:46 PM, Date/Time: 3/3/2011 6:01:20 PM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_mid_chan_amb_temp_23.4_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.838$ mho/m; $\epsilon_r = 37.577$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.239 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.849 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.111 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.231 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

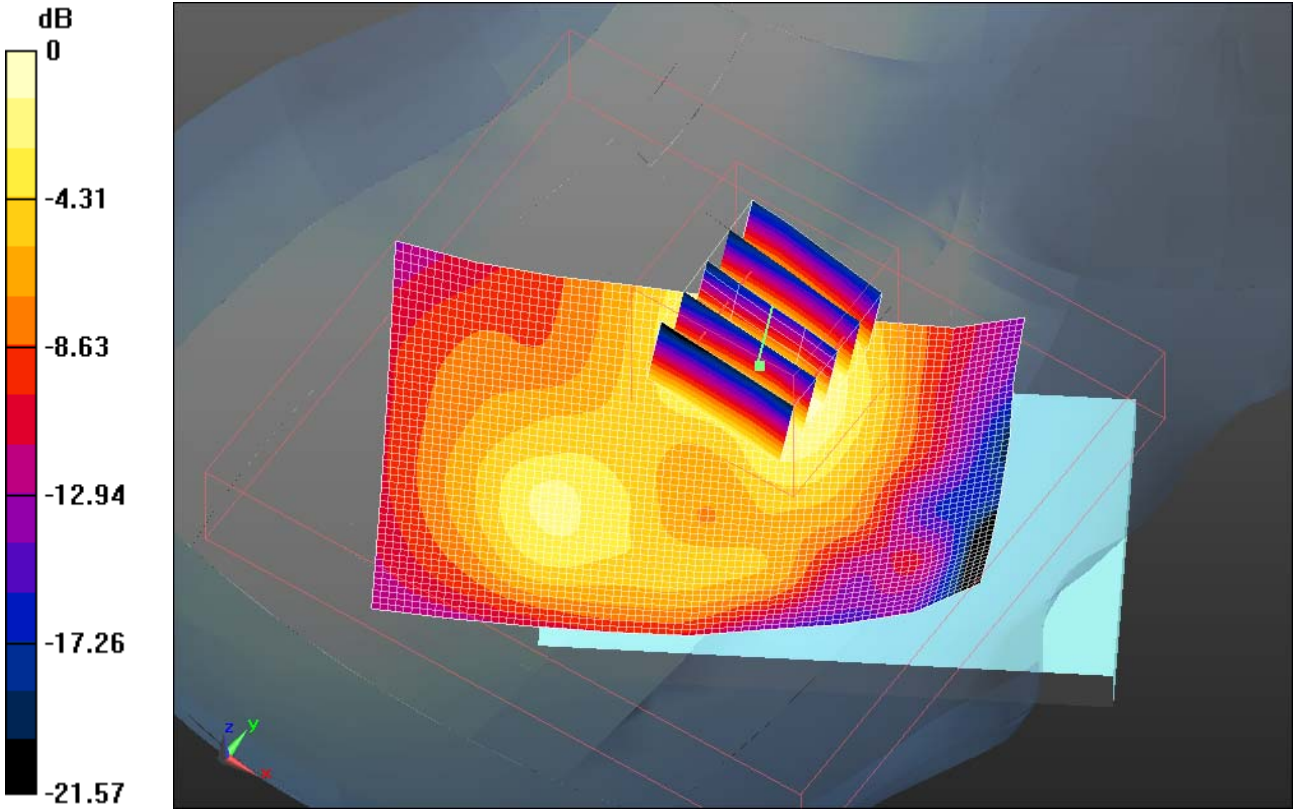

0 dB = 0.230mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 74(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/3/2011 6:12:53 PM, Date/Time: 3/3/2011 6:22:49 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_802.11b_mid_chan_amb_temp_23.3_liq_temp_21.8

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.838$ mho/m; $\epsilon_r = 37.577$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.194 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.244 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.089 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 75(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.202 mW/g

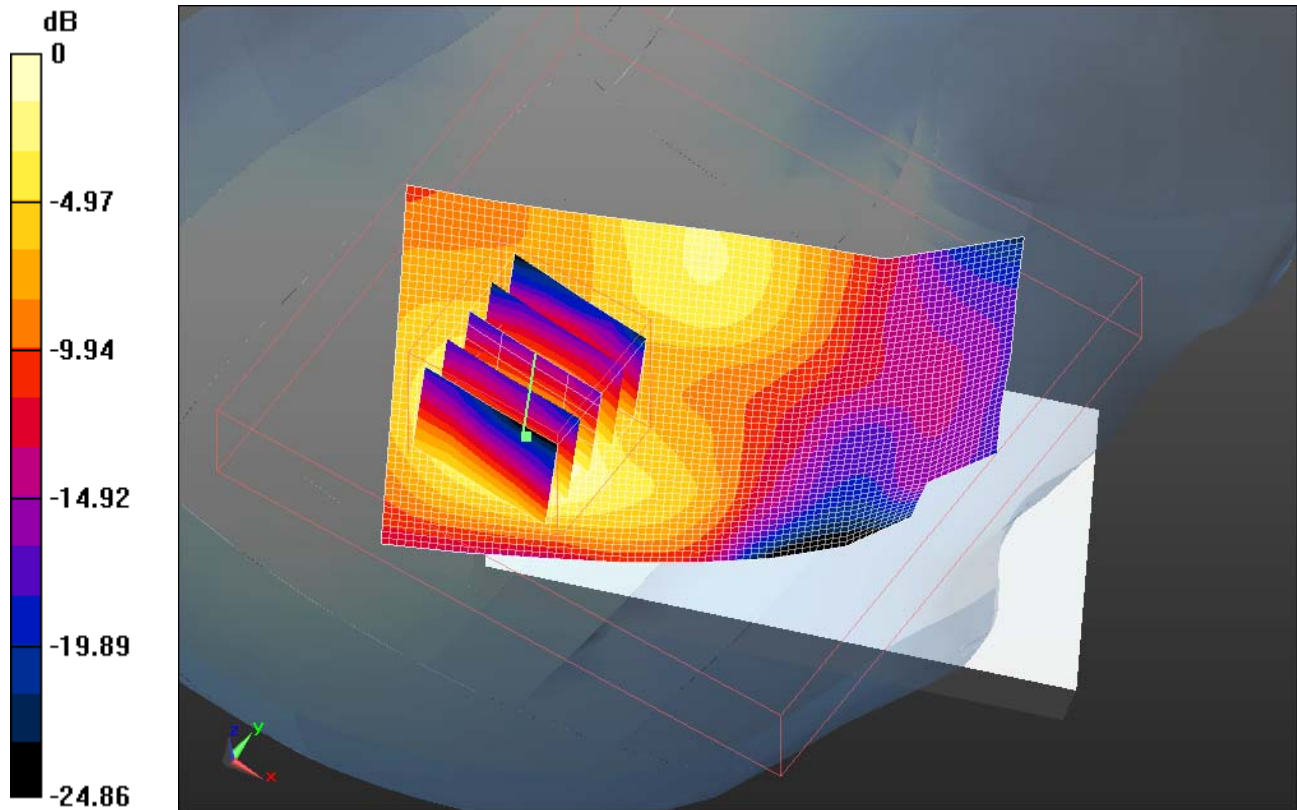

0 dB = 0.200mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 76(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/3/2011 6:34:16 PM, Date/Time: 3/3/2011 6:40:04 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_mid_chan_amb_temp_23.3_liq_temp_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.838$ mho/m; $\epsilon_r = 37.577$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.535 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.457 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.199 W/kg

SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.234 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.611 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

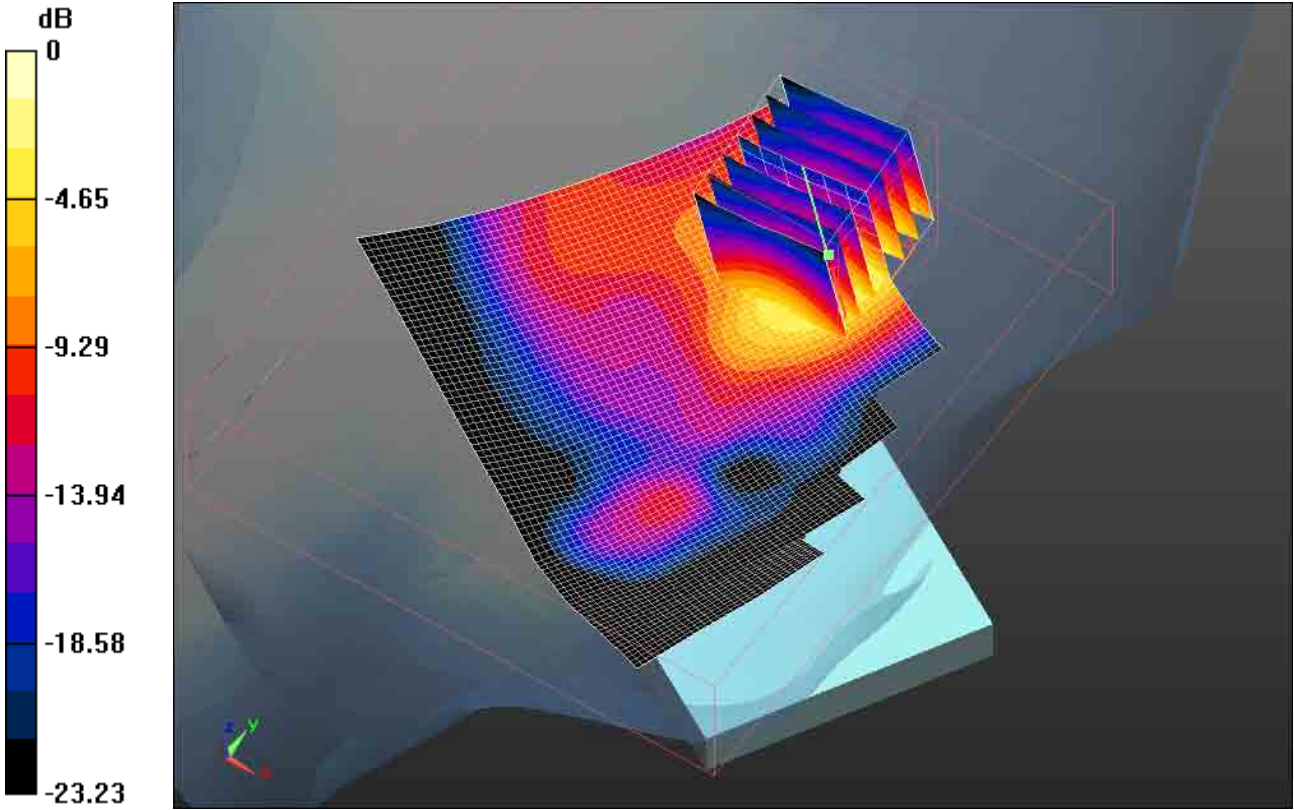

0 dB = 0.610mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 78(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/3/2011 6:55:09 PM, Date/Time: 3/3/2011 7:16:04 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11b_mid_chan_amb_temp_23.2_liq_temp_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.838$ mho/m; $\epsilon_r = 37.577$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.248 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.873 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.113 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.237 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

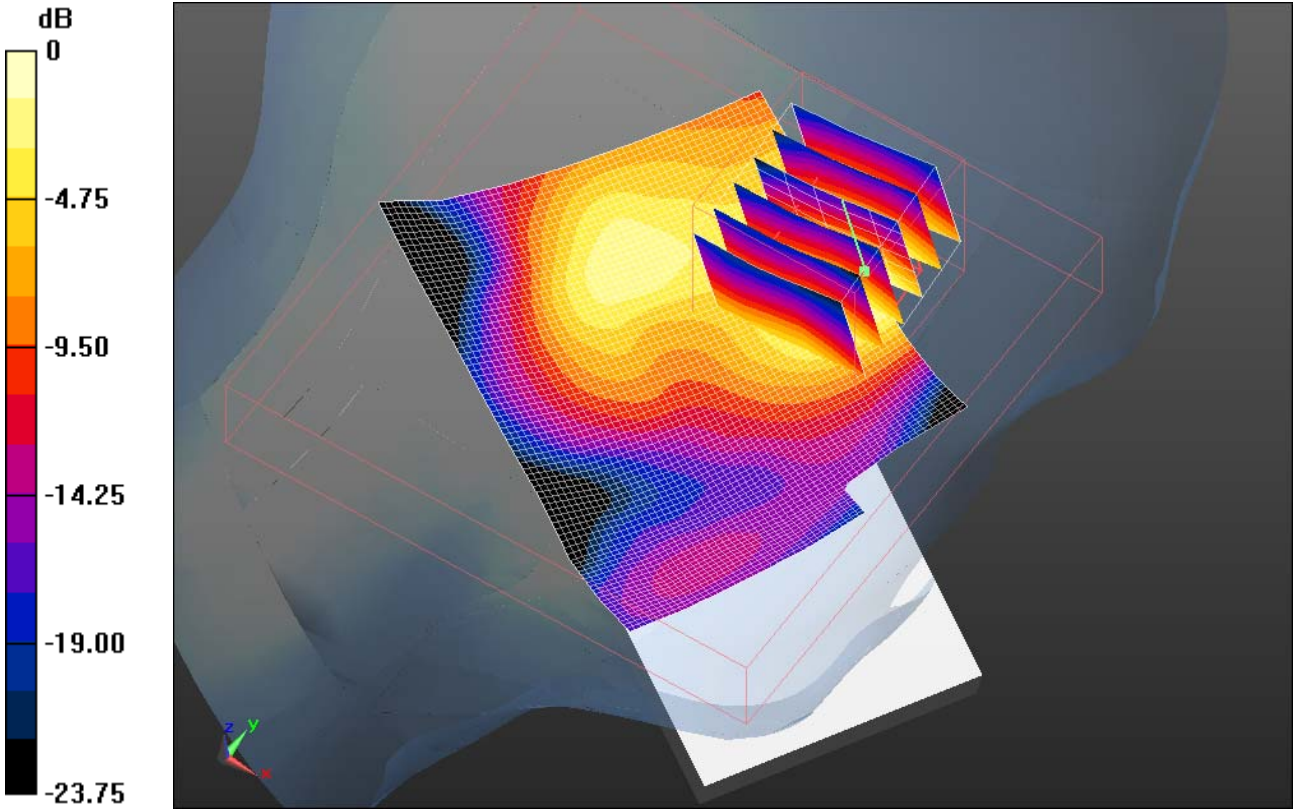

0 dB = 0.240mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 80(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/24/2011 10:31:08 PM, Date/Time: 5/24/2011 10:43:45 PM

Test Laboratory: RIM Testing Services

**RightHandSide_802.11a_low_band_chan_36_amb_temp_23.4_liq_temp
_22.5C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6


Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5180 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.807$ mho/m; $\epsilon_r = 35.19$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(5.01, 5.01, 5.01); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)


Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.027 mW/g

**Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded),
dist=2mm (8x8x5)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.178 V/m; Power Drift = 0.60 dB
Peak SAR (extrapolated) = 0.083 W/kg
SAR(1 g) = 0.00886 mW/g; SAR(10 g) = 0.00356 mW/g
Maximum value of SAR (measured) = 0.022 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 81(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

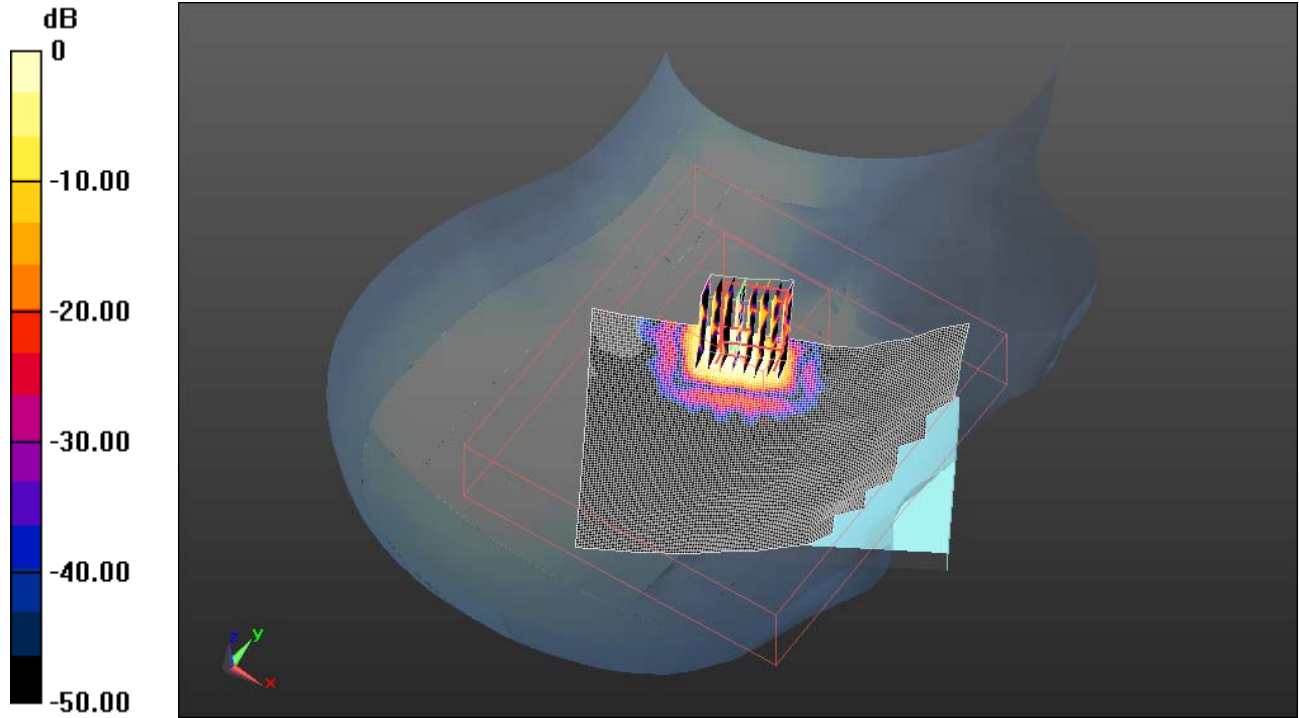

0 dB = 0.020mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 82(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/24/2011 11:05:53 PM, Date/Time: 5/24/2011 11:18:30 PM

Test Laboratory: RIM Testing Services

**RightHandSide_802.11a_low_band_chan_52_amb_temp_23.4_liq_temp
_22.5C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5260 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.899$ mho/m; $\epsilon_r = 35.01$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(5.01, 5.01, 5.01); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.064 mW/g

**Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded),
dist=2mm (8x8x5)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.691 V/m; Power Drift = 0.64 dB
Peak SAR (extrapolated) = 0.076 W/kg
SAR(1 g) = 0.00887 mW/g; SAR(10 g) = 0.0035 mW/g
Maximum value of SAR (measured) = 0.021 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

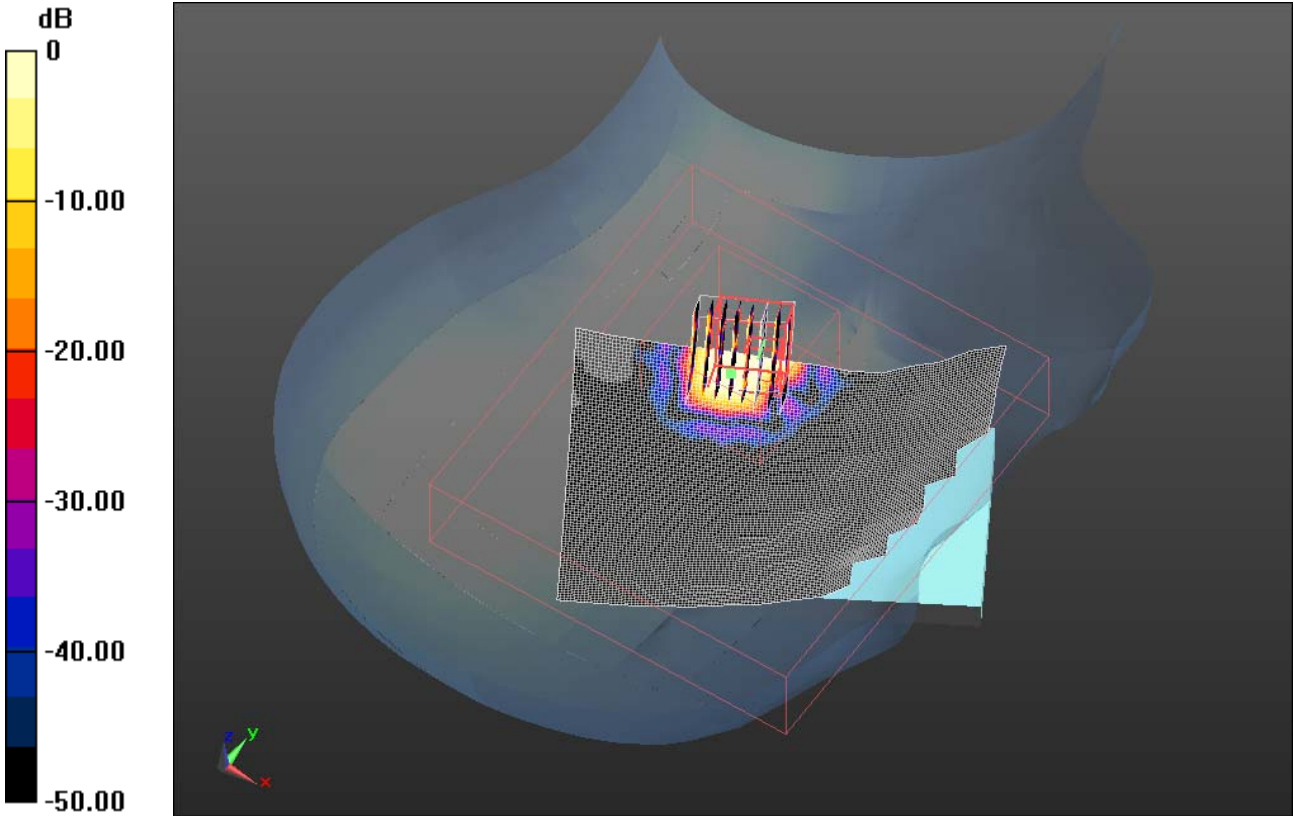

0 dB = 0.020mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 84(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/25/2011 10:31:28 AM, Date/Time: 5/25/2011 10:44:44 AM

Test Laboratory: RIM Testing Services

RightHandSide_802.11a_upper_band_chan_104_amb_temp_23.8_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6


Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5520 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5520$ MHz; $\sigma = 4.988$ mho/m; $\epsilon_r = 34.336$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.63, 4.63, 4.63); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)


Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.073 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded), dist=2mm (9x10x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.143 V/m; Power Drift = 0.42 dB
Peak SAR (extrapolated) = 0.257 W/kg
SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.00493 mW/g
Maximum value of SAR (measured) = 0.077 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 85(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

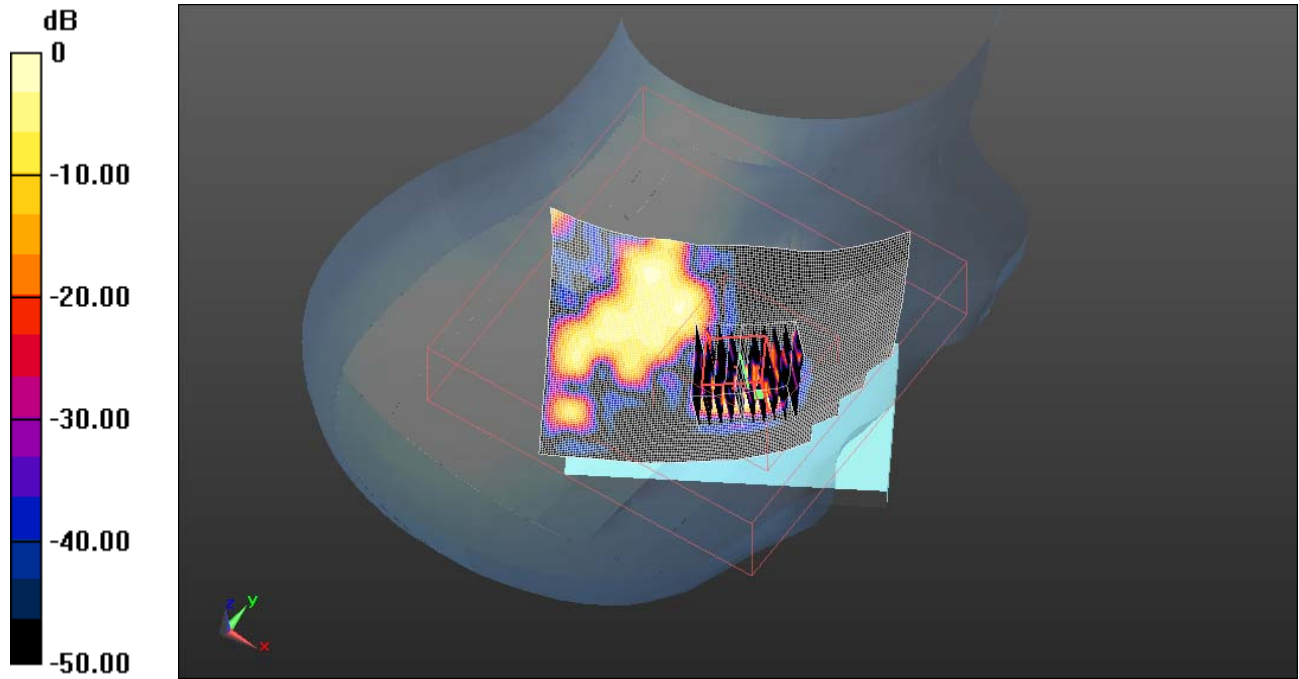

0 dB = 0.080mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 86(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/25/2011 11:52:23 AM, Date/Time: 5/25/2011 12:05:39 PM

Test Laboratory: RIM Testing Services

RightHandSide_802.11a_upper_band_chan_149_amb_temp_23.0_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6


Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5745 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.3 \text{ mho/m}$; $\epsilon_r = 34.477$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.42, 4.42, 4.42); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)


Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.474 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded), dist=2mm (9x10x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 4.780 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.765 W/kg
SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.043 mW/g
Maximum value of SAR (measured) = 0.400 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 87(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

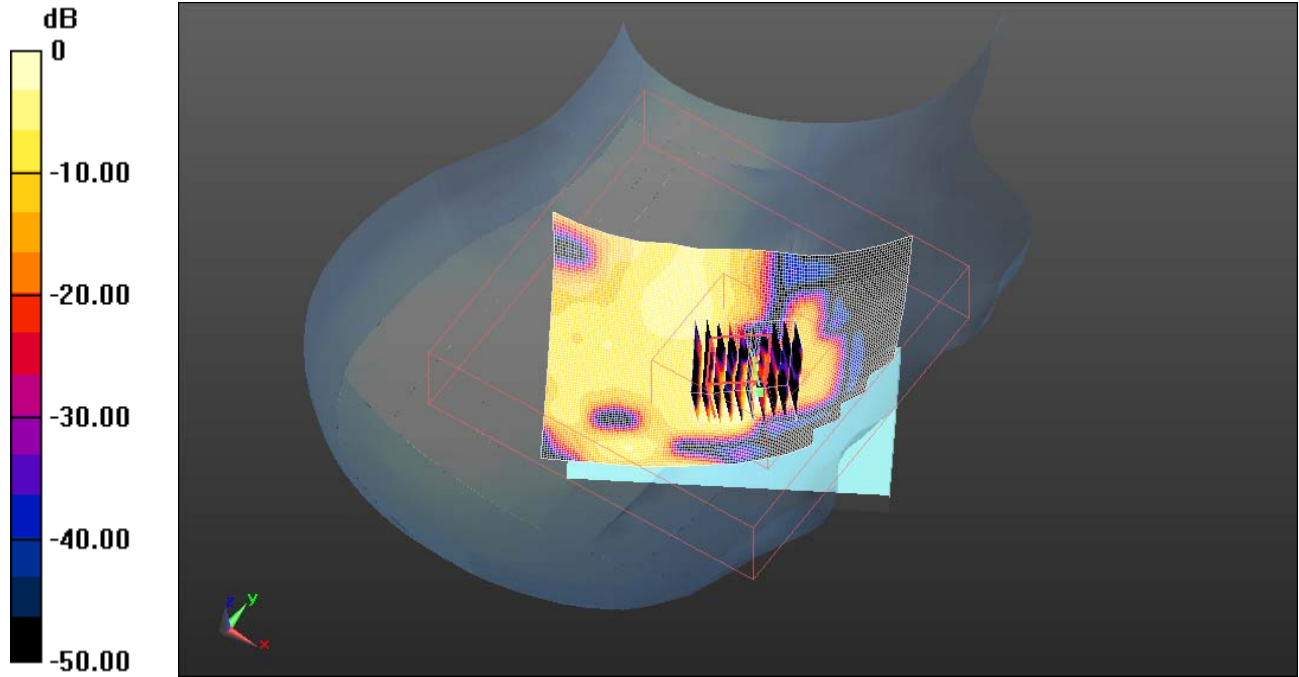

0 dB = 0.400mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 88(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/25/2011 1:31:32 PM, Date/Time: 5/25/2011 1:45:14 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_802.11a_upper_band_chan_149_amb_temp_23.4_li
q_temp_22.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6


Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5745 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.3$ mho/m; $\epsilon_r = 34.477$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.42, 4.42, 4.42); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)


Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.00875 mW/g

**Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded),
dist=2mm (10x9x5)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 1.433 V/m; Power Drift = -0.45 dB
Peak SAR (extrapolated) = 0.00335 W/kg
SAR(1 g) = 6.23e-005 mW/g; SAR(10 g) = 9.98e-006 mW/g
Maximum value of SAR (measured) = 0.010 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 89(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

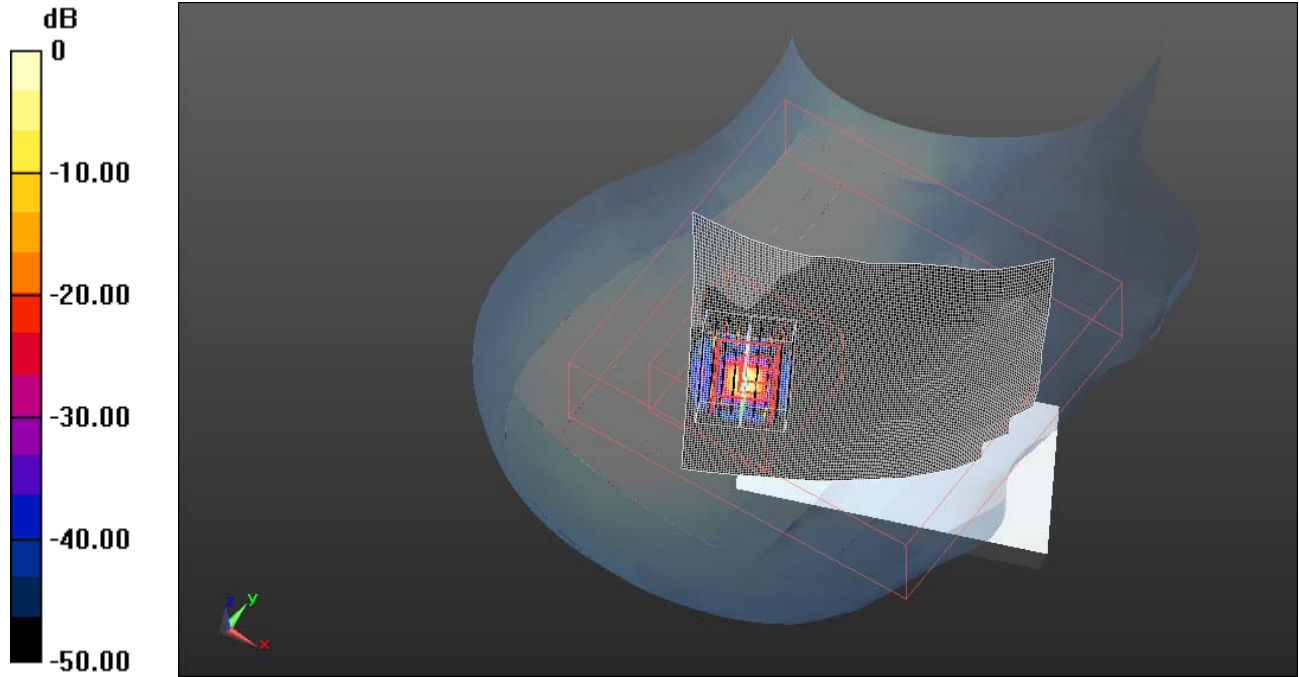

0 dB = 0.010mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 90(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/24/2011 5:29:24 PM, Date/Time: 5/24/2011 5:41:05 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11a_low_band_chan_36_amb_temp_23.4_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5180 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.807$ mho/m; $\epsilon_r = 35.19$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(5.01, 5.01, 5.01); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.220 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded), dist=2mm (9x9x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.946 V/m; Power Drift = 0.43 dB
Peak SAR (extrapolated) = 0.154 W/kg
SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.00975 mW/g
Maximum value of SAR (measured) = 0.093 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

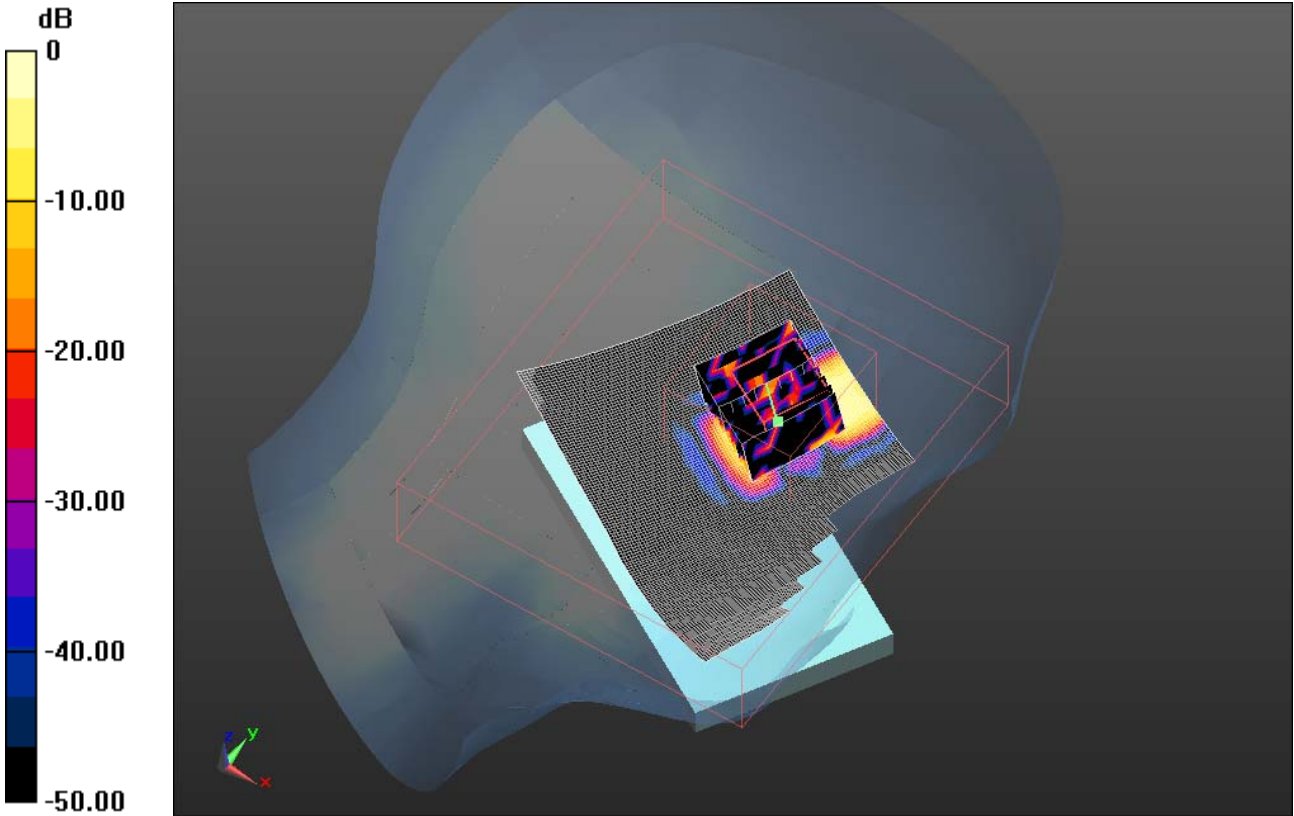

0 dB = 0.090mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 92(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/24/2011 6:10:46 PM, Date/Time: 5/24/2011 6:22:26 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11a_low_band_chan_52_amb_temp_23.2_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6


Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5260 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.899$ mho/m; $\epsilon_r = 35.01$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(5.01, 5.01, 5.01); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)


Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.134 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded), dist=2mm (9x9x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.922 V/m; Power Drift = 0.29 dB
Peak SAR (extrapolated) = 0.147 W/kg
SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.011 mW/g
Maximum value of SAR (measured) = 0.094 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 93(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

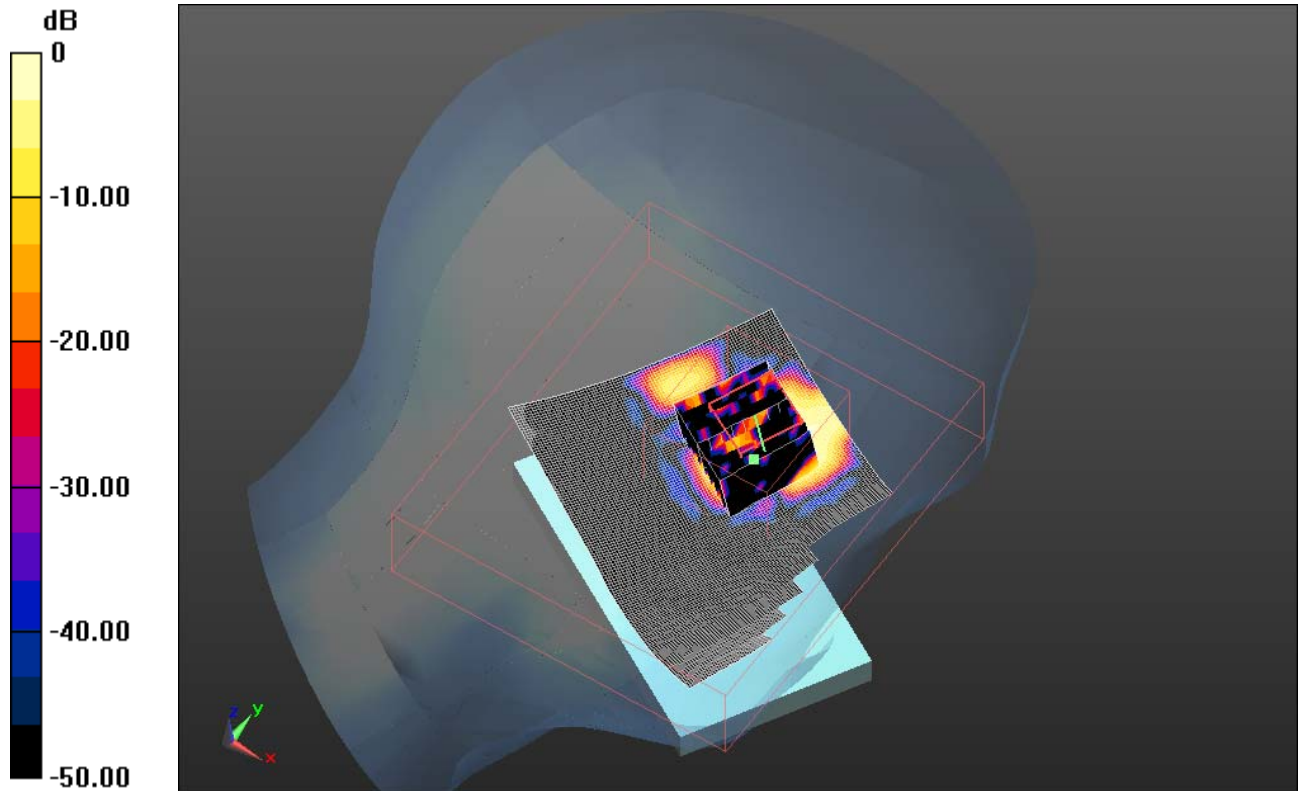

0 dB = 0.090mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 94(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/24/2011 7:04:36 PM, Date/Time: 5/24/2011 7:16:19 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11a_upper_band_chan_104_amb_temp_23.2_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5520 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.052$ mho/m; $\epsilon_r = 35.092$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.63, 4.63, 4.63); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.209 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded), dist=2mm (9x9x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 1.423 V/m; Power Drift = 1.56 dB
Peak SAR (extrapolated) = 0.205 W/kg
SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.017 mW/g
Maximum value of SAR (measured) = 0.124 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

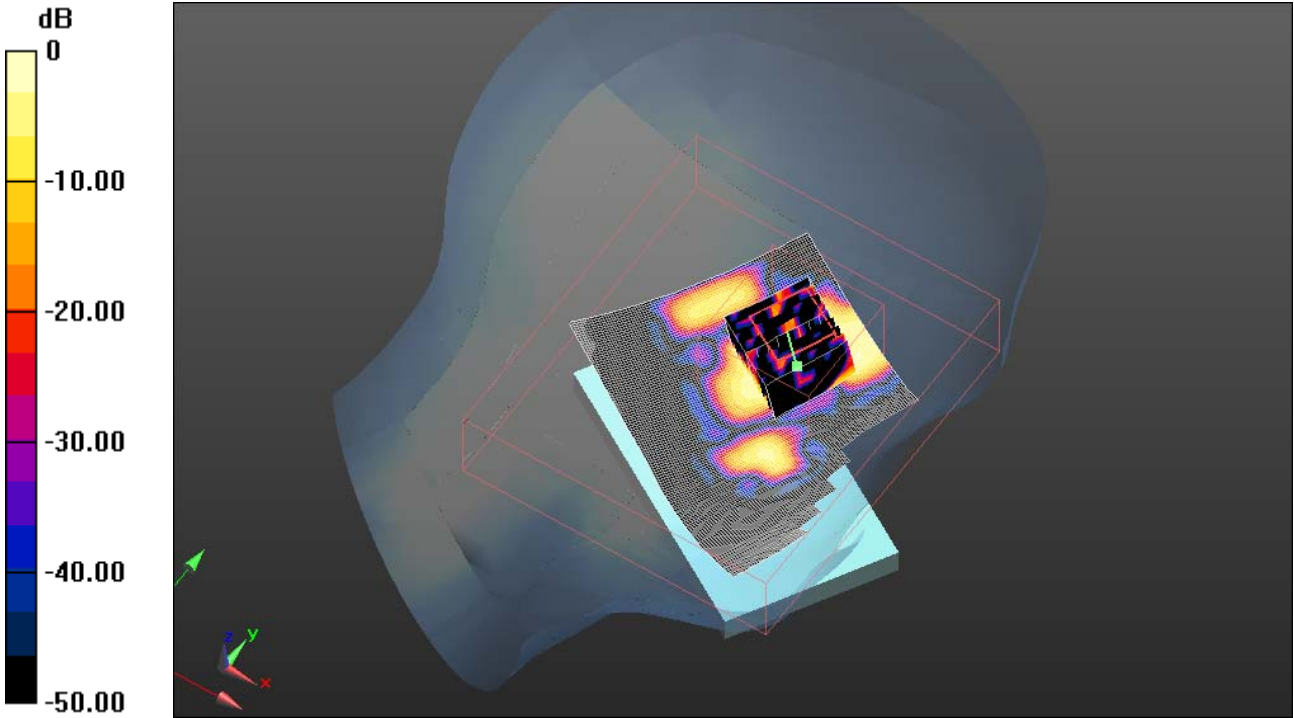

0 dB = 0.120mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 96(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/24/2011 7:41:23 PM, Date/Time: 5/24/2011 7:53:06 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11a_upper_band_chan_149_amb_temp_23.2_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6


Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5745 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.3$ mho/m; $\epsilon_r = 34.477$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.42, 4.42, 4.42); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)


Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.199 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded), dist=2mm (9x9x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 1.506 V/m; Power Drift = 0.85 dB
Peak SAR (extrapolated) = 0.169 W/kg
SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.013 mW/g
Maximum value of SAR (measured) = 0.088 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 97(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

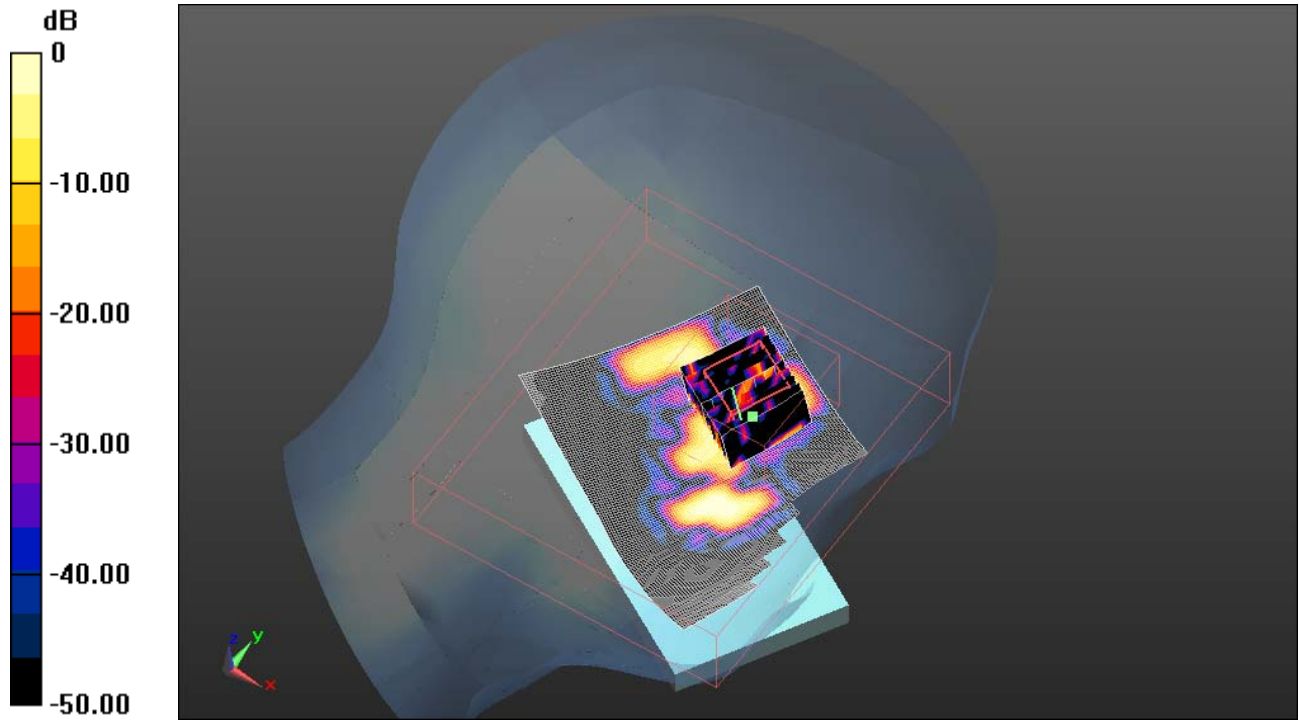

0 dB = 0.090mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 98(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 5/24/2011 8:50:08 PM, Date/Time: 5/24/2011 9:01:50 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_802.11a_upper_band_chan_104_amb_temp_23.2_liq
_temp_22.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5520 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.052$ mho/m; $\epsilon_r = 35.092$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.63, 4.63, 4.63); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.134 mW/g

**Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm, graded),
dist=2mm (9x9x5)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0.848 V/m; Power Drift = 3.54 dB
Peak SAR (extrapolated) = 0.203 W/kg
SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.015 mW/g
Maximum value of SAR (measured) = 0.101 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

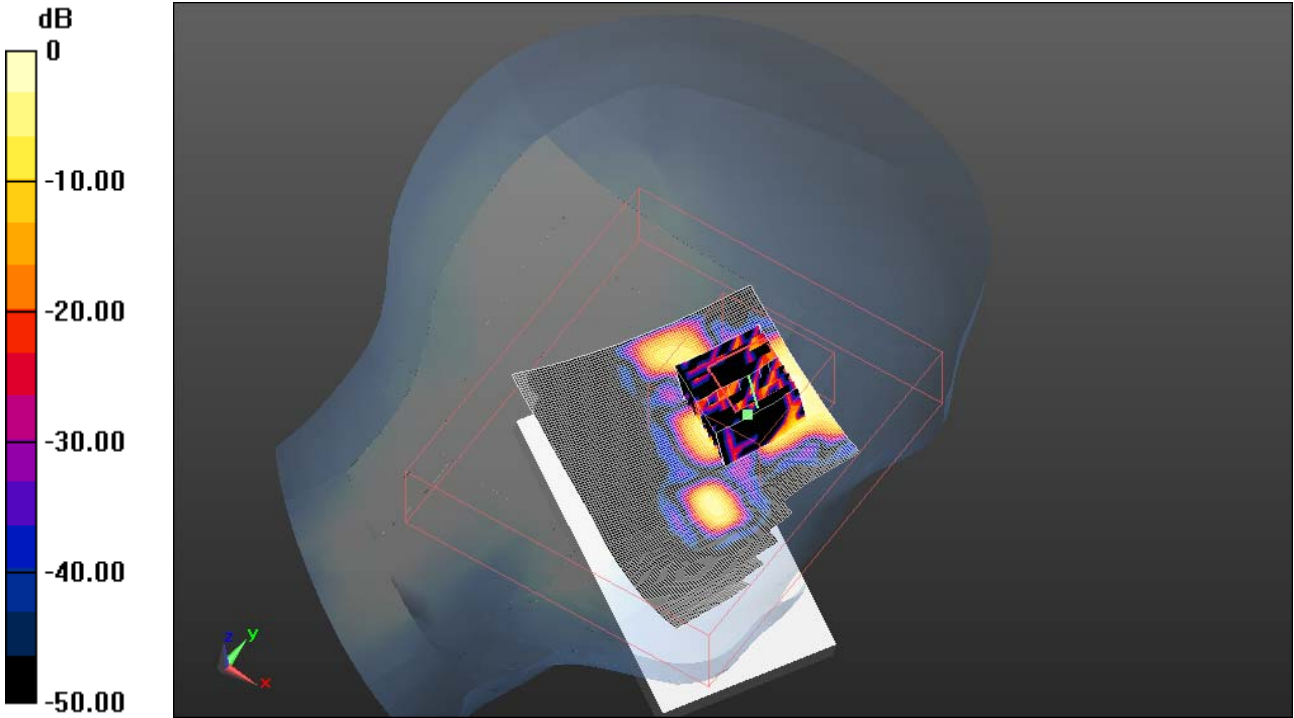

0 dB = 0.100mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 100(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/4/2011 1:40:22 AM, Date/Time: 3/4/2011 1:57:58 AM

Test Laboratory: RIM Testing Services

RightHandSide_Bluetooth_mid_chan_amb_temp_23.4_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.843$ mho/m; $\epsilon_r = 37.556$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 8.52e-005 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 0.704 V/m; Power Drift = 1.36 dB


Peak SAR (extrapolated) = 0.000719 W/kg

SAR(1 g) = 2.97e-005 mW/g; SAR(10 g) = 2.9e-006 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.000948 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 101(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

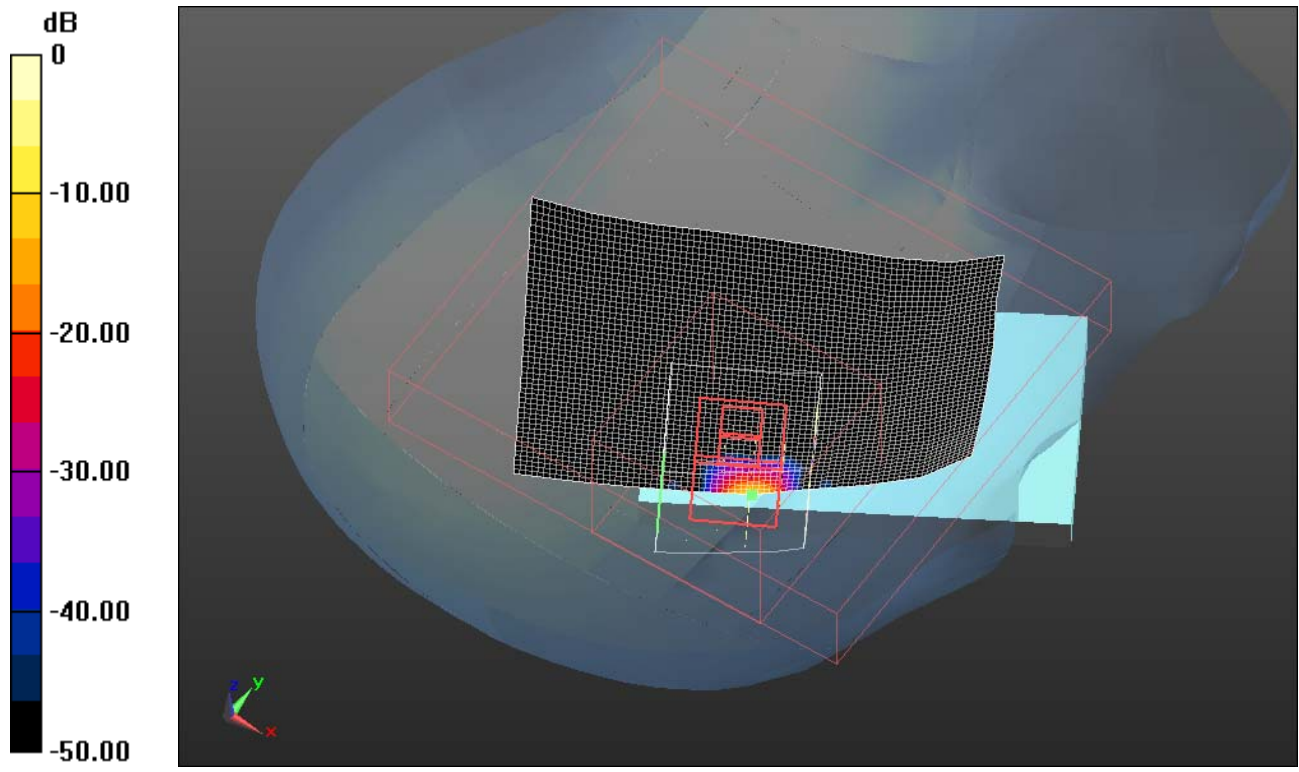

0 dB = 0.00095mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 102(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/4/2011 10:34:24 AM, Date/Time: 3/4/2011 10:39:57 AM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_Bluetooth_mid_chan_amb_temp_23.8_liq_temp_22.
0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.843$ mho/m; $\epsilon_r = 37.556$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.00111 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (7x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 1.228 V/m; Power Drift = 0.32 dB


Peak SAR (extrapolated) = 0.00173 W/kg

SAR(1 g) = 0.000217 mW/g; SAR(10 g) = 2.88e-005 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00132 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 103(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

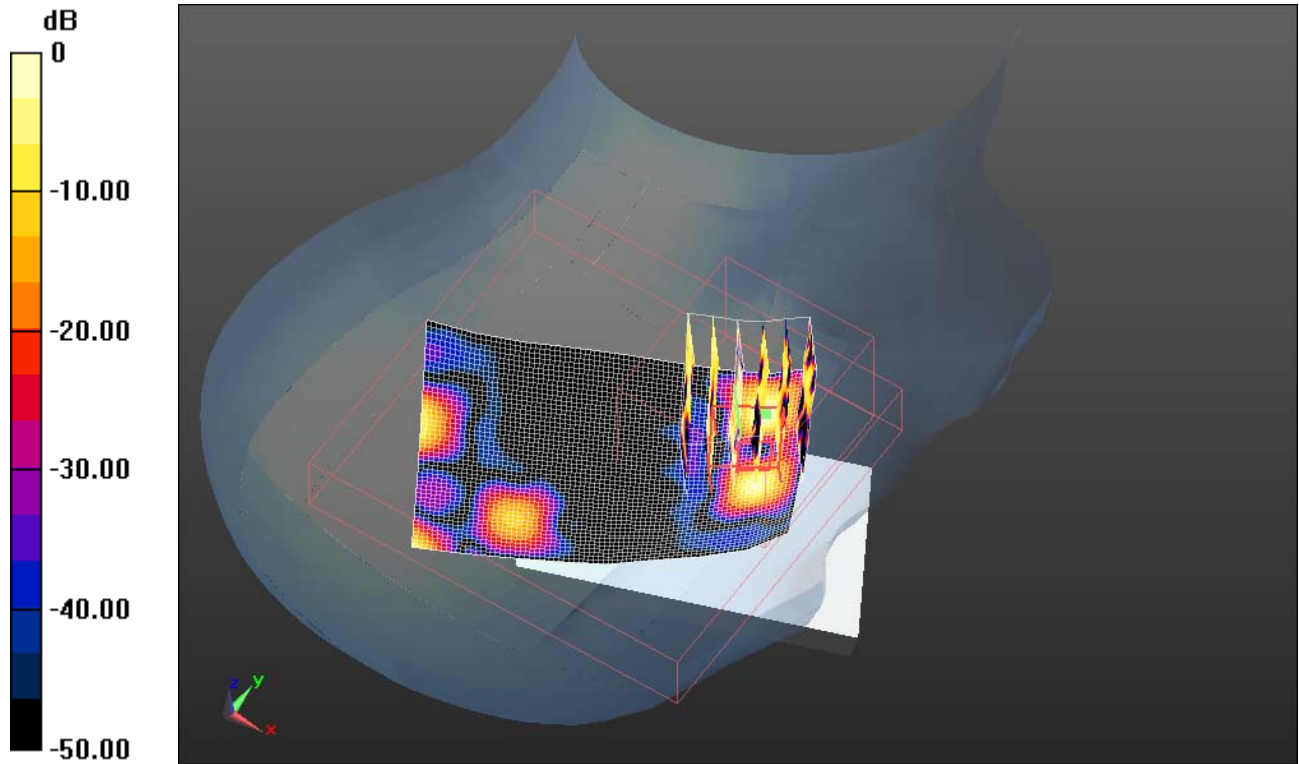

0 dB = 0.0013mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 104(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/4/2011 11:10:26 AM, Date/Time: 3/4/2011 11:56:00 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Bluetooth_mid_chan_amb_temp_23.9_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.843$ mho/m; $\epsilon_r = 37.556$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.014 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (8x8x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.802 V/m; Power Drift = 0.98 dB

Peak SAR (extrapolated) = 0.014 W/kg

SAR(1 g) = 0.00687 mW/g; SAR(10 g) = 0.0028 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00792 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

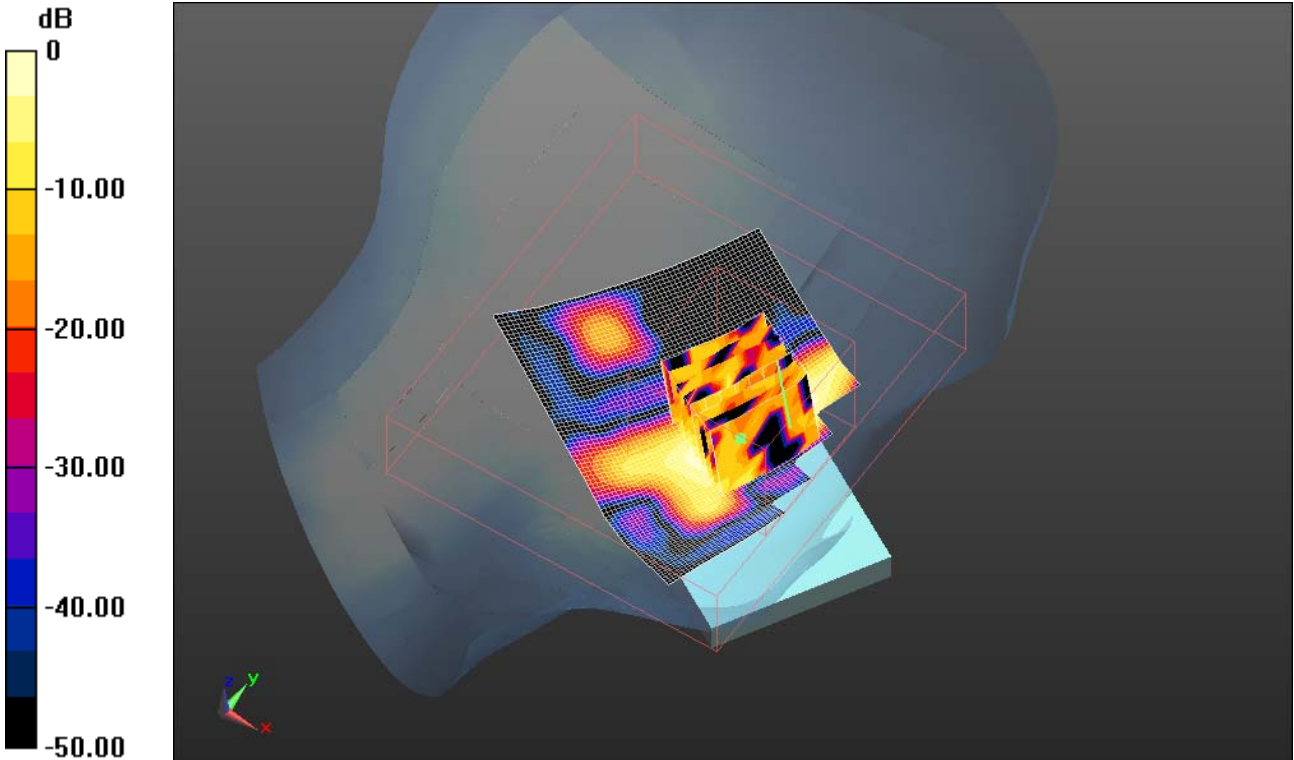

0 dB = 0.0079mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 106(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/4/2011 12:21:30 PM, Date/Time: 3/4/2011 12:27:15 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_Bluetooth_mid_chan_amb_temp_23.9_liq_temp_22.0

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.843$ mho/m; $\epsilon_r = 37.556$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.00107 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.829 V/m; Power Drift = 0.97 dB

Peak SAR (extrapolated) = 0.00241 W/kg

SAR(1 g) = 8.03e-005 mW/g; SAR(10 g) = 1.81e-005 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00128 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW


IC ID
2503A-RDU70CW
2503A-RDE70UW

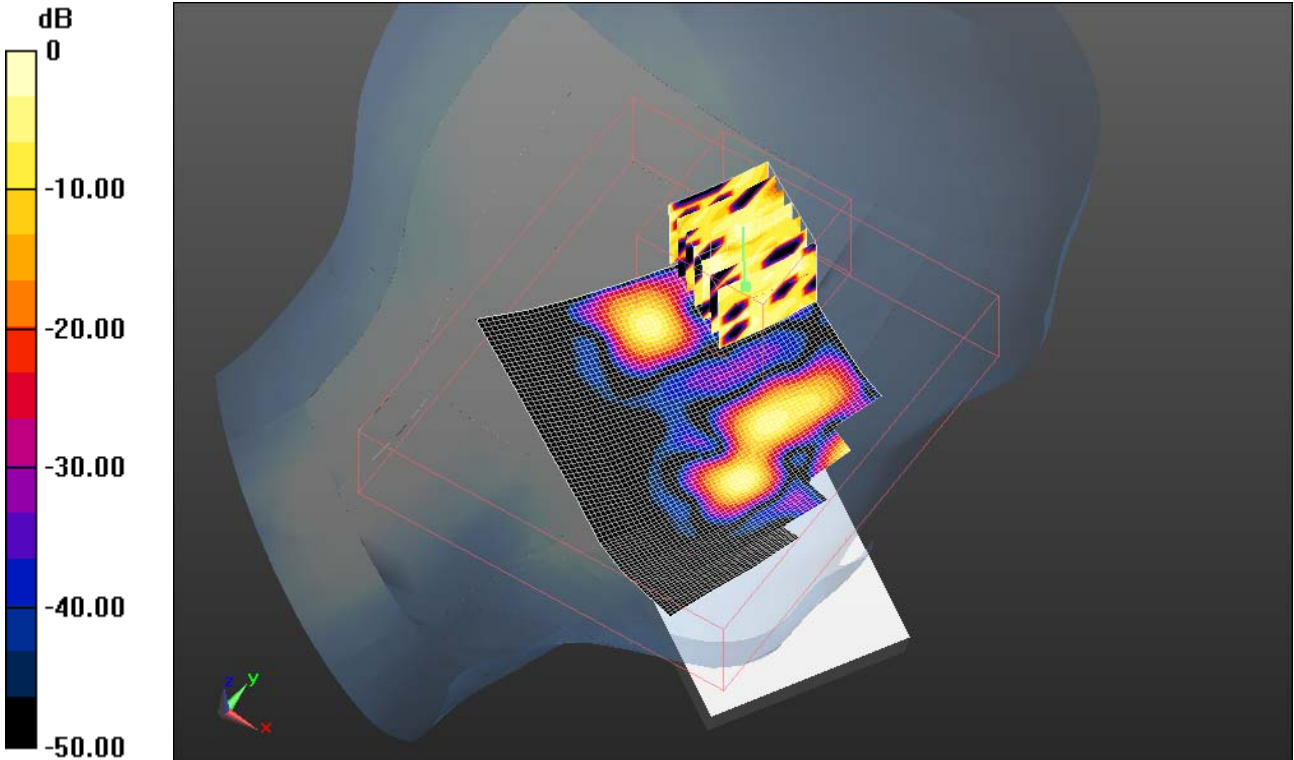


0 dB = 0.0013mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 108(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Z axis plot for the worst case head configuration:

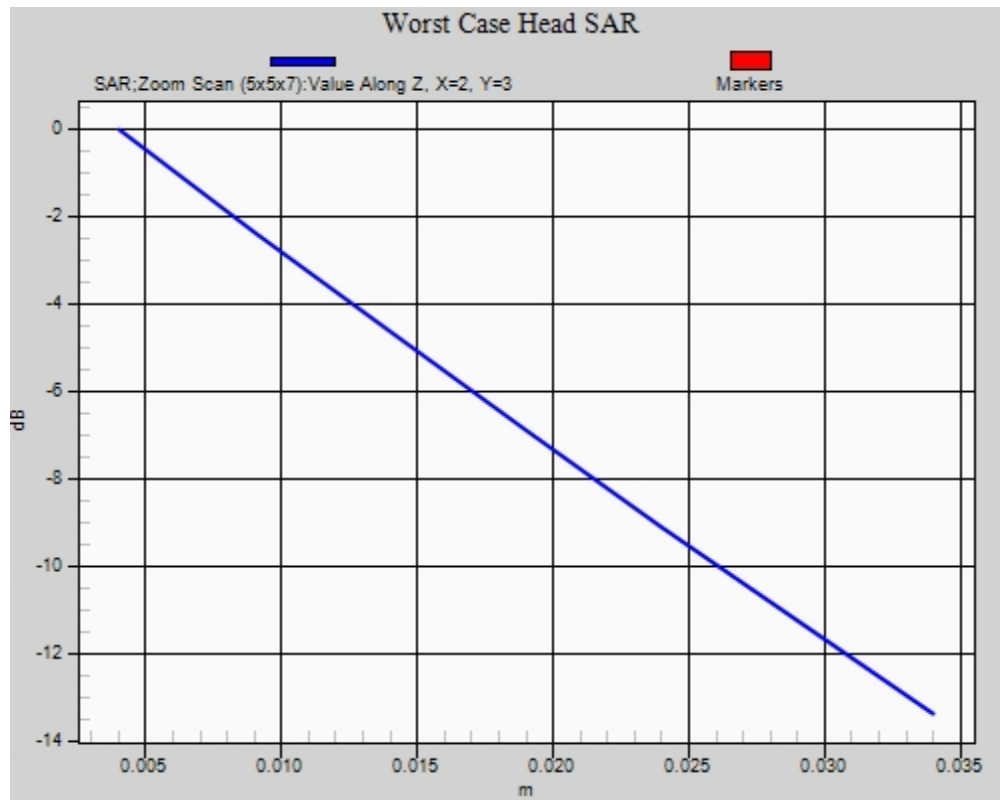

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 109(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/8/2011 4:57:52 PM, Date/Time: 3/8/2011 5:03:17 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_V_mid_chan_amb_temp_23.3_liq_temp_2

1.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.46$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.617 mW/g


Configuration/Touch position - 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.116 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.449 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 110(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.610 mW/g

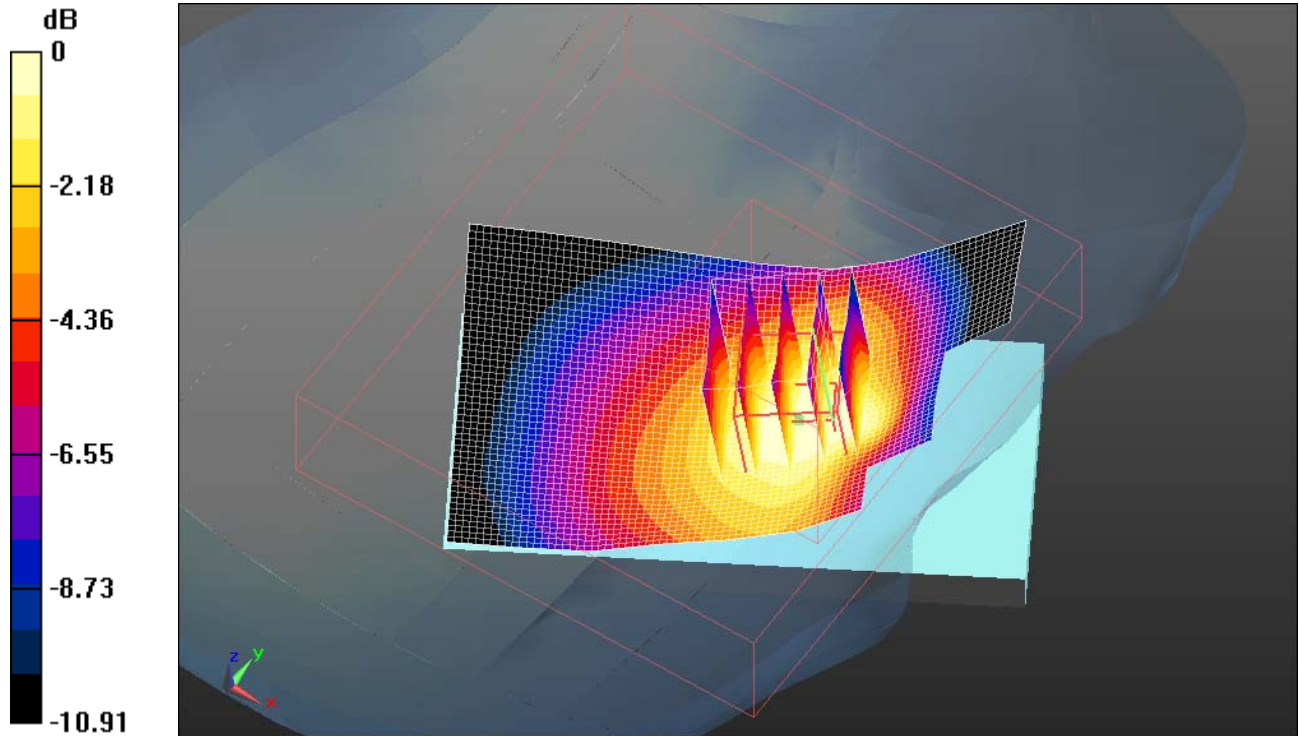

0 dB = 0.610mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 111(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/8/2011 5:22:10 PM, Date/Time: 3/8/2011 5:34:34 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_UMTS_band_V_mid_chan_amb_temp_23.4_liq_tem
p_21.8C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.46$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.348 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.112 V/m; Power Drift = 0.28 dB


Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.268 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 112(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.363 mW/g

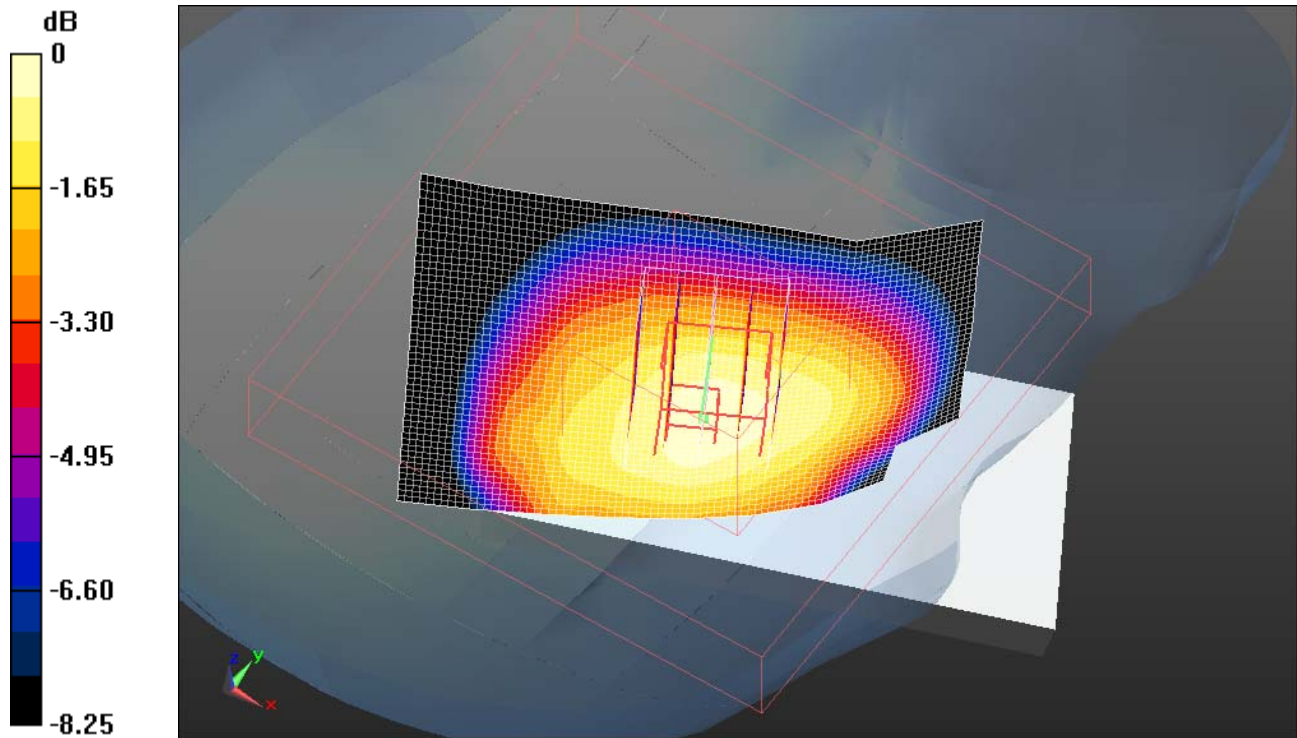

0 dB = 0.360mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 113(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/8/2011 5:46:52 PM, Date/Time: 3/8/2011 5:52:40 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UTMS_band_V_mid_chan_amb_temp_23.4_liq_temp_21.

8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.46$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.562 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.529 V/m; Power Drift = -0.26 dB


Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.327 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 114(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.554 mW/g

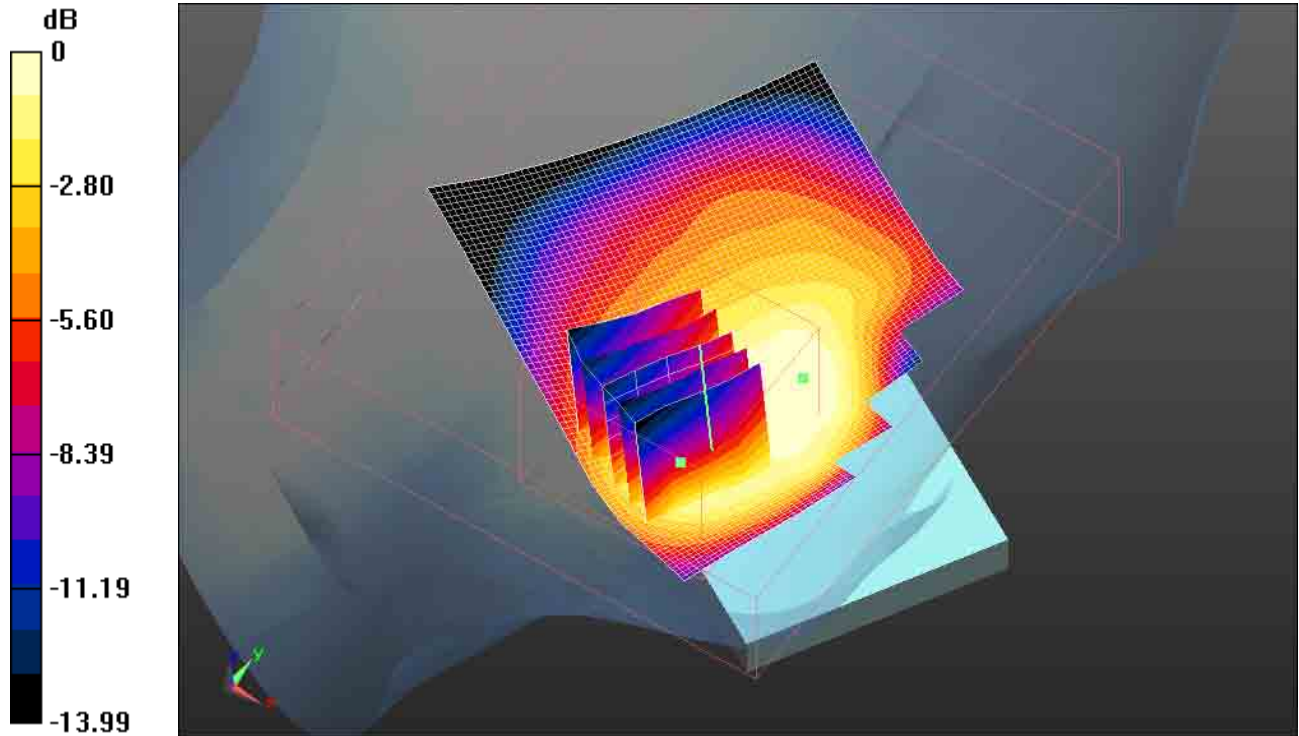

0 dB = 0.550mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 115(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 3/8/2011 6:03:17 PM, Date/Time: 3/8/2011 6:09:34 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_UMTS_band_V_mid_chan_amb_temp_23.5_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.46$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.374 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.603 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.279 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 116(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.381 mW/g

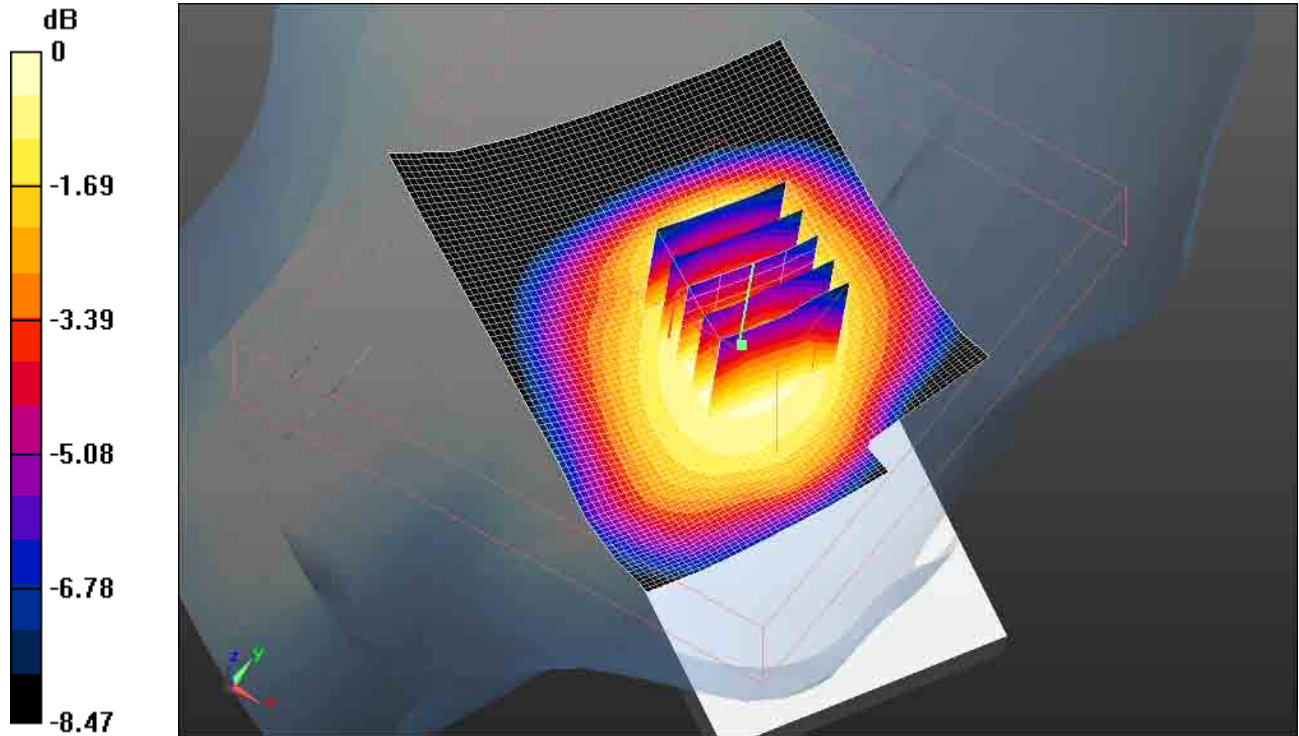

0 dB = 0.380mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 117(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/20/2011 4:49:45 PM, Date/Time: 4/20/2011 4:55:04 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_V_mid_chan_amb_temp_23.6_liq_temp_2

2.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.055$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.586 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.282 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.608 W/kg

SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.388 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 118(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.518 mW/g

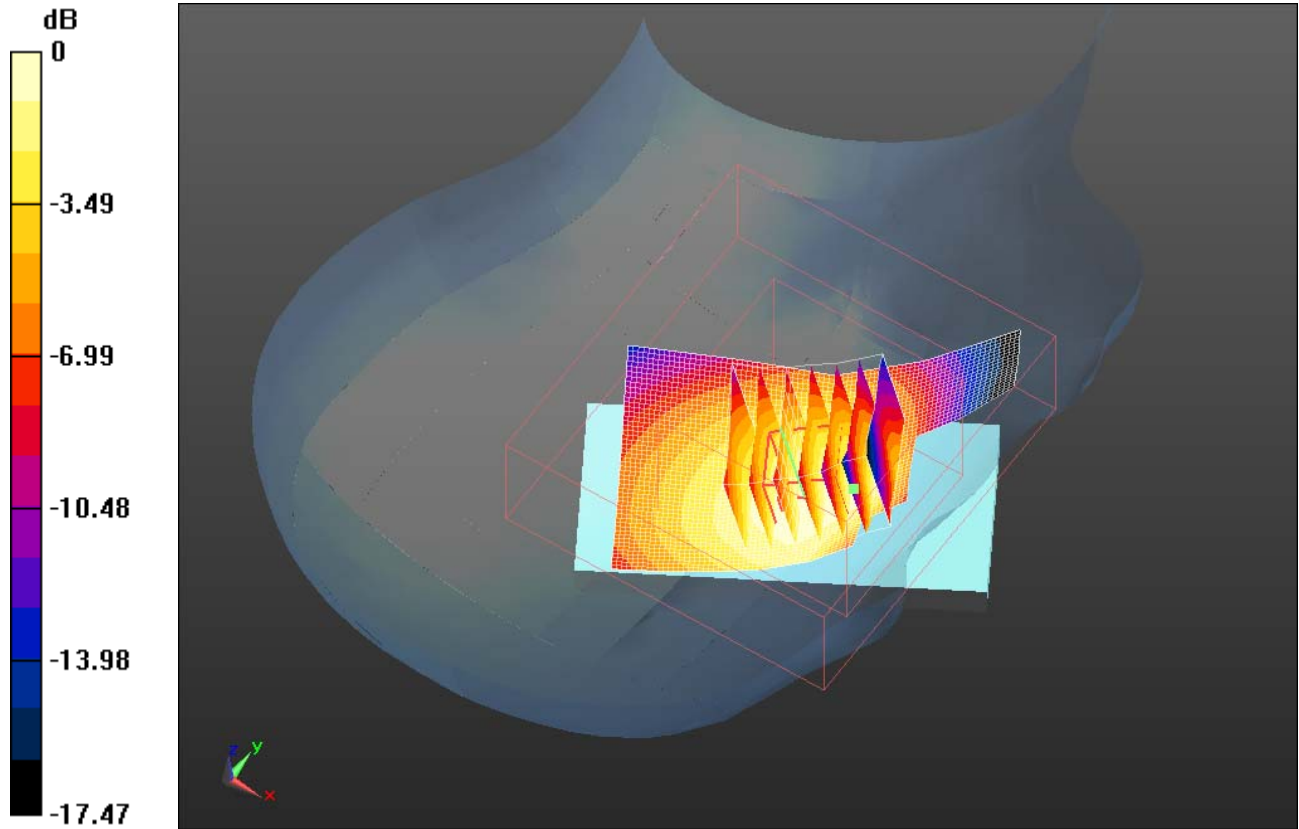

0 dB = 0.520mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 119(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/20/2011 3:12:16 PM, Date/Time: 4/20/2011 3:18:04 PM, Date/Time: 4/20/2011 3:32:31 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UTMS_band_V_mid_chan_amb_temp_24.1_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.055$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.652 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.196 V/m; Power Drift = -0.44 dB

Peak SAR (extrapolated) = 0.986 W/kg

SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.357 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 120(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.601 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x8x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.196 V/m; Power Drift = -0.54 dB

Peak SAR (extrapolated) = 0.922 W/kg


SAR(1 g) = 0.557 mW/g; SAR(10 g) = 0.419 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.576 mW/g

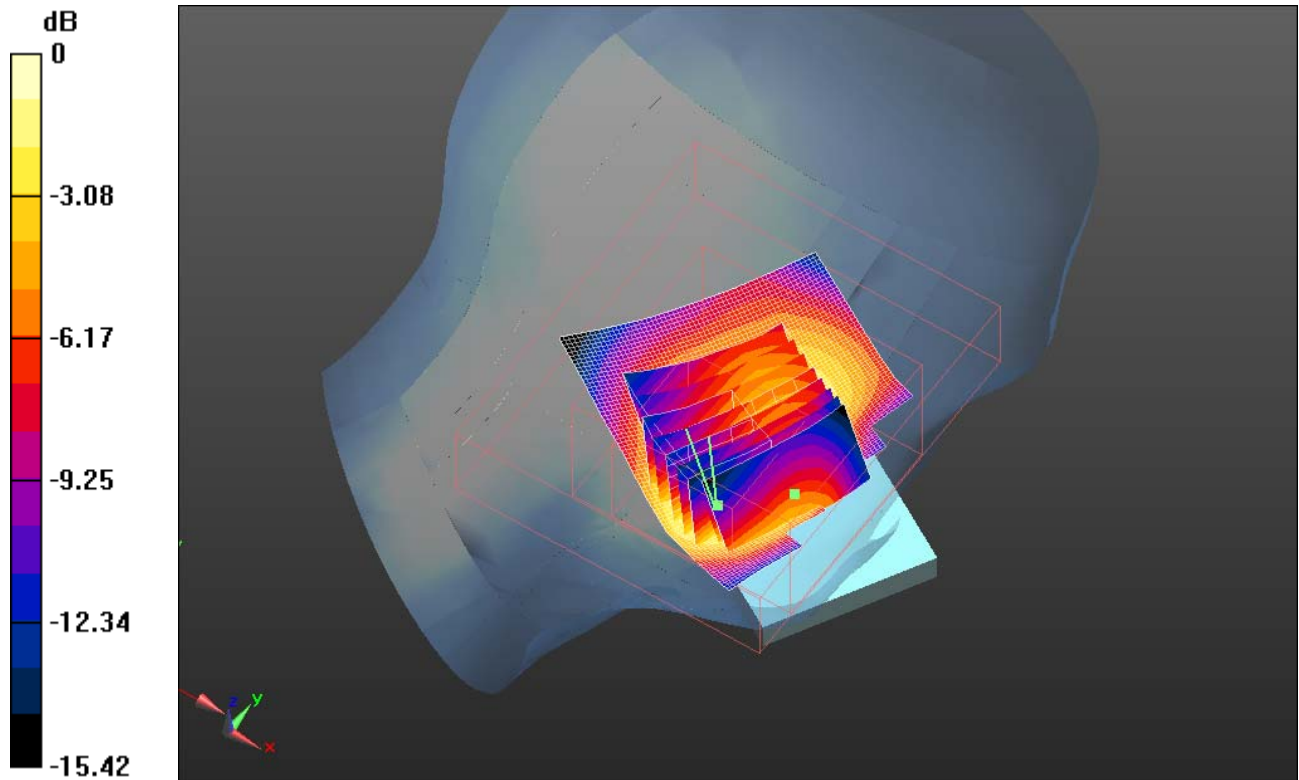

0 dB = 0.580mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 121(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 7/18/2011 6:49:04 PM, Date/Time: 7/18/2011 6:54:23 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_mid_chan_amb_temp_23.0_liq_temp_22.4

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.395 \text{ mho/m}$; $\epsilon_r = 40.824$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- ; SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.930 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:


Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.558 V/m; Power Drift = 0.42 dB

Peak SAR (extrapolated) = 1.273 W/kg


SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 0.956 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 122(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

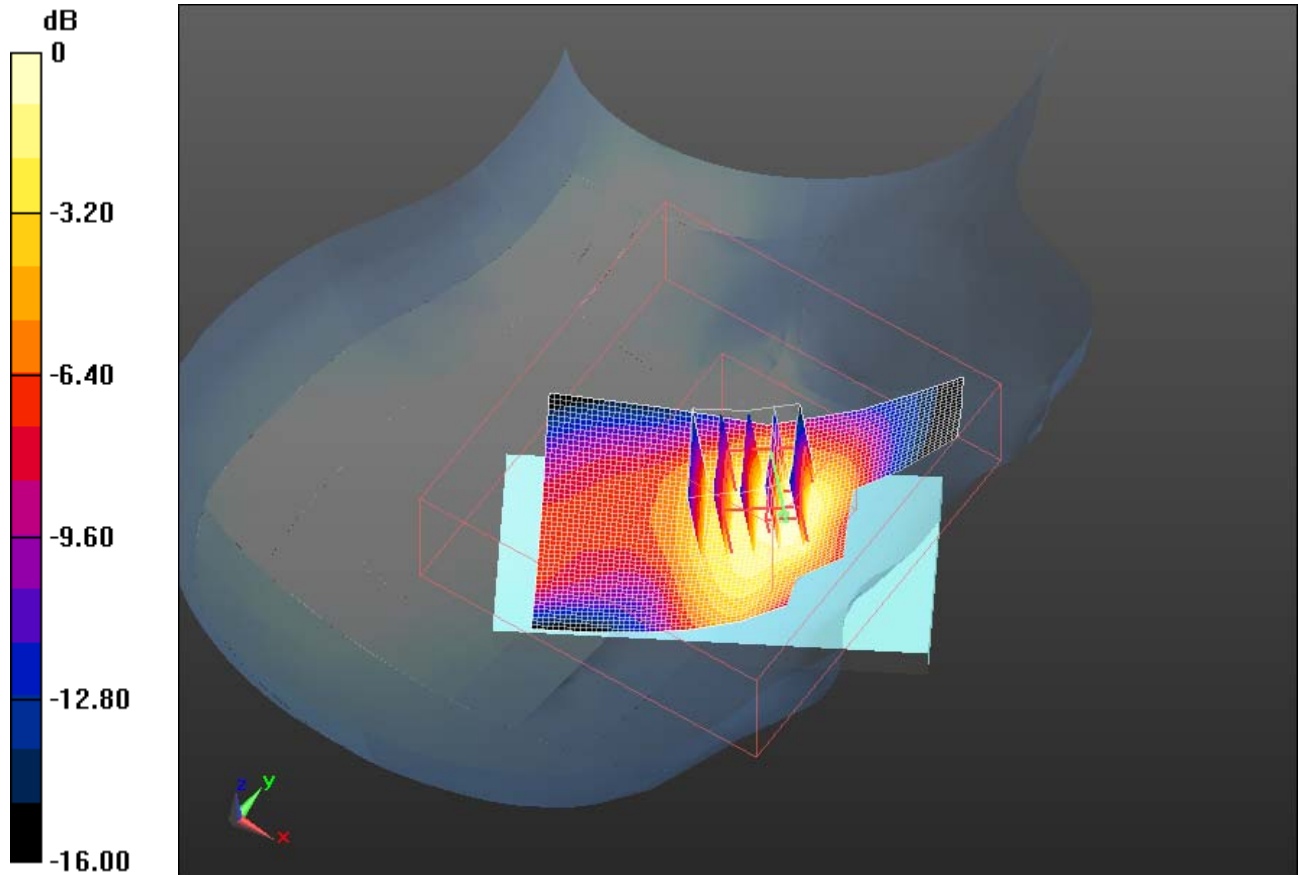

0 dB = 0.960mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 123(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 7/18/2011 5:53:20 PM, Date/Time: 7/18/2011 5:58:38 PM

Test Laboratory: RIM Testing Services

RightHandSide_GSM1900_low_chan_amb_temp_23.0_liq_temp_22.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.365$ mho/m; $\epsilon_r = 40.932$;
 $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- ; SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.664 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.590 V/m; Power Drift = 0.0024 dB


Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.360 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.616 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 124(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

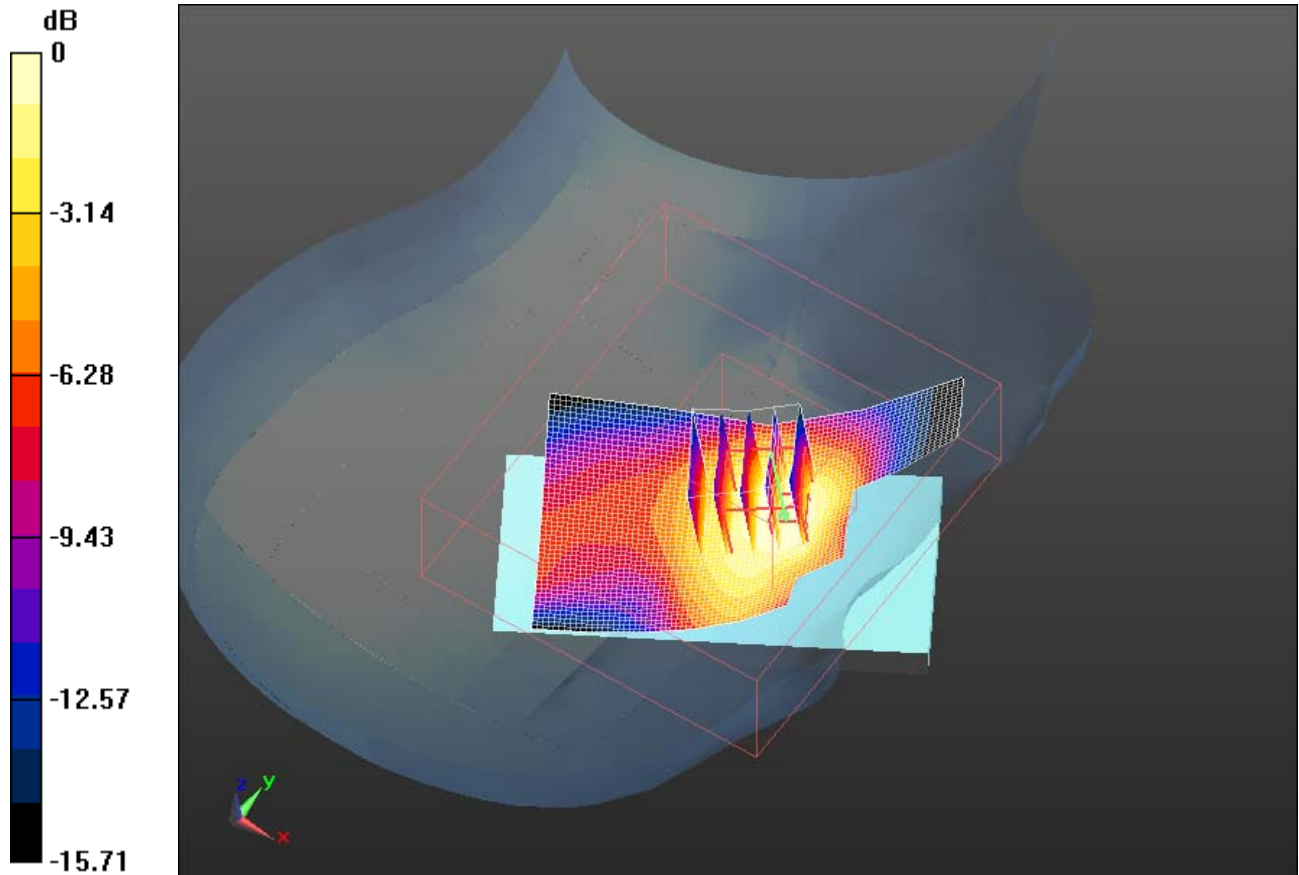

0 dB = 0.620mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 125(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/24/2011 8:16:04 PM, Date/Time: 2/24/2011 8:21:09 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_II_mid_chan_amb_temp_23.5_liq_temp_2

2.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.910 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.099 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.113 W/kg

SAR(1 g) = 0.780 mW/g; SAR(10 g) = 0.514 mW/g

Maximum value of SAR (measured) = 0.833 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

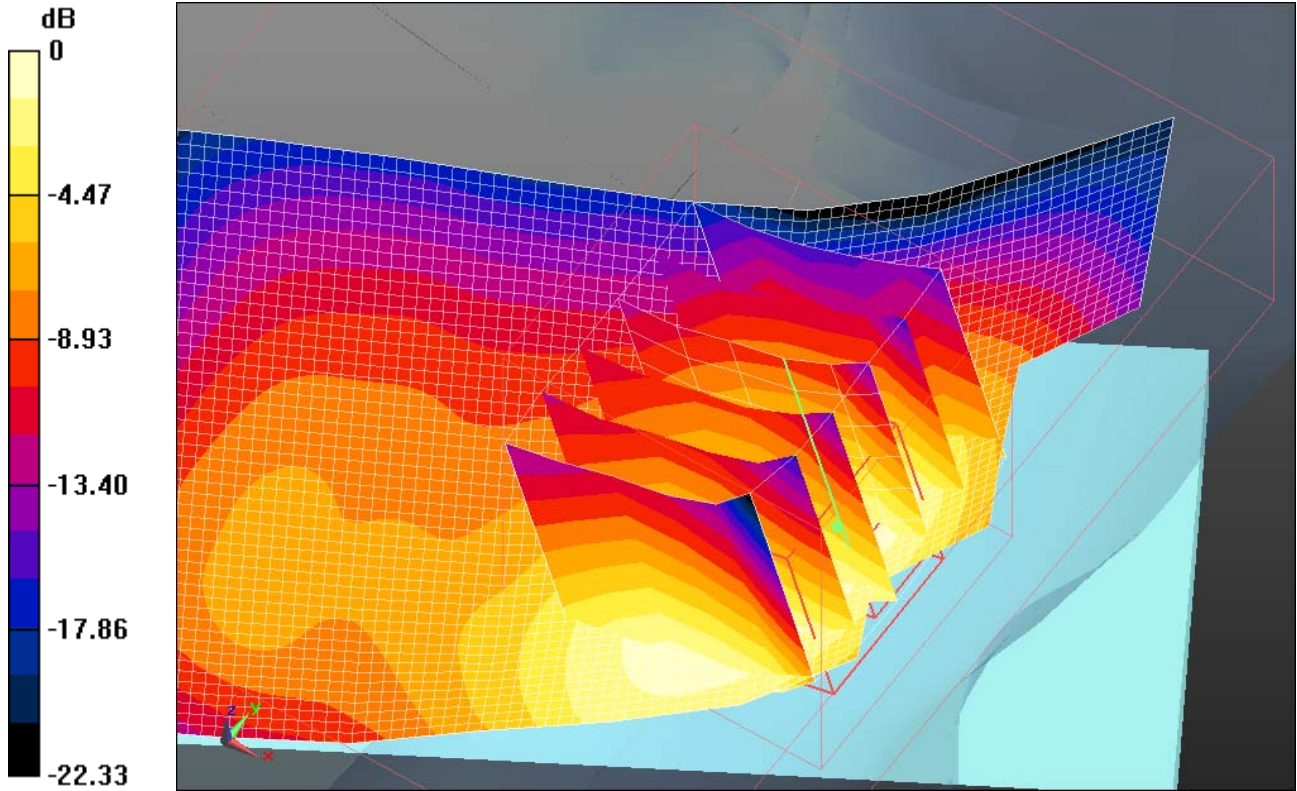

0 dB = 0.830mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 127(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/24/2011 8:33:48 PM, Date/Time: 2/24/2011 8:39:17 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_UMTS_band_II_mid_chan_amb_temp_23.4_liq_tem
p_22.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.409 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.364 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.367 mW/g


Author Data
Andrew Becker

Dates of Test
**Feb 7 – May 25, July 18,
2011**


Test Report No
**RTS-3933-1105-11A
RTS-2580-1106-03 Rev2**

FCC ID:
**L6ARDU70CW
L6ARDE70UW**

IC ID
**2503A-RDU70CW
2503A-RDE70UW**

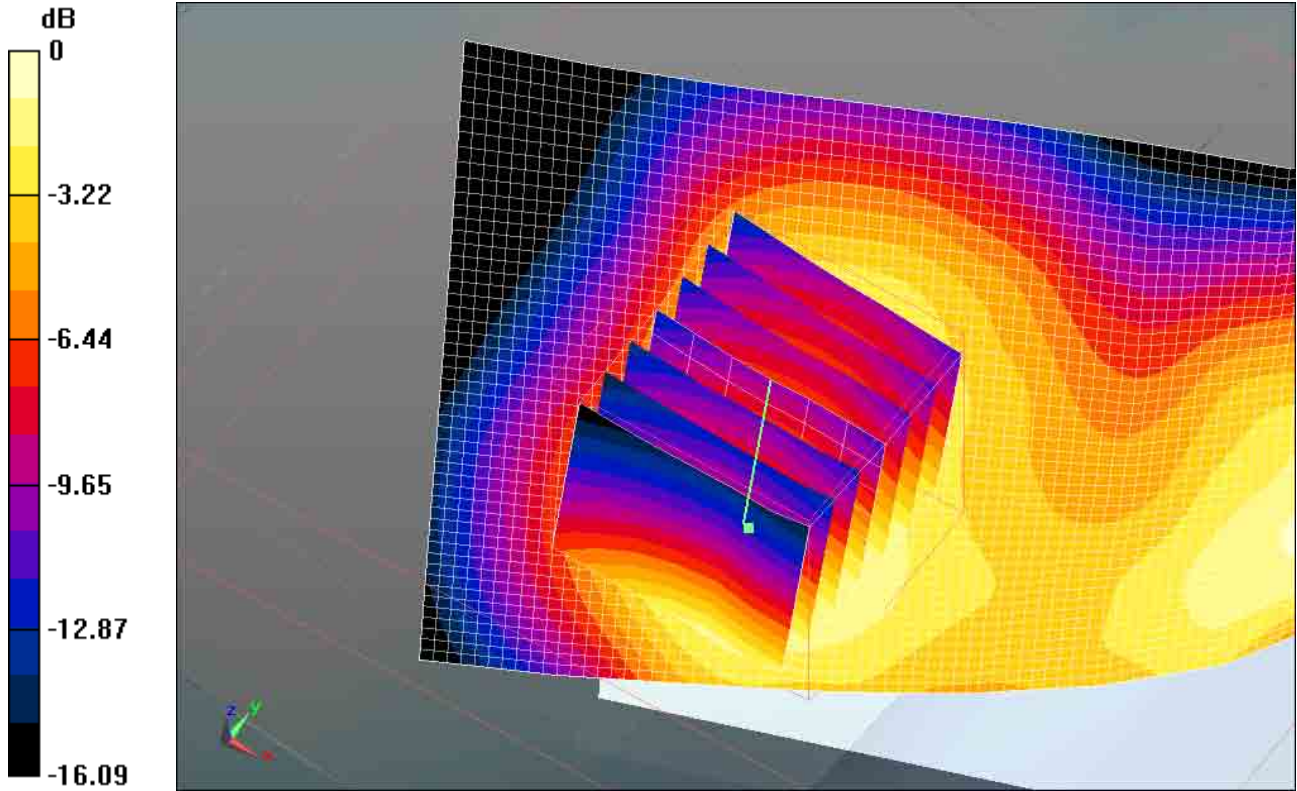

0 dB = 0.370mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 129(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/24/2011 9:49:13 PM, Date/Time: 2/24/2011 9:54:57 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_low_chan_amb_temp_23.3_liq_temp_22.

0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.283$ mho/m; $\epsilon_r = 38.522$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.338 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.911 V/m; Power Drift = -0.28 dB


Peak SAR (extrapolated) = 1.654 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.722 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 130(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.206 mW/g

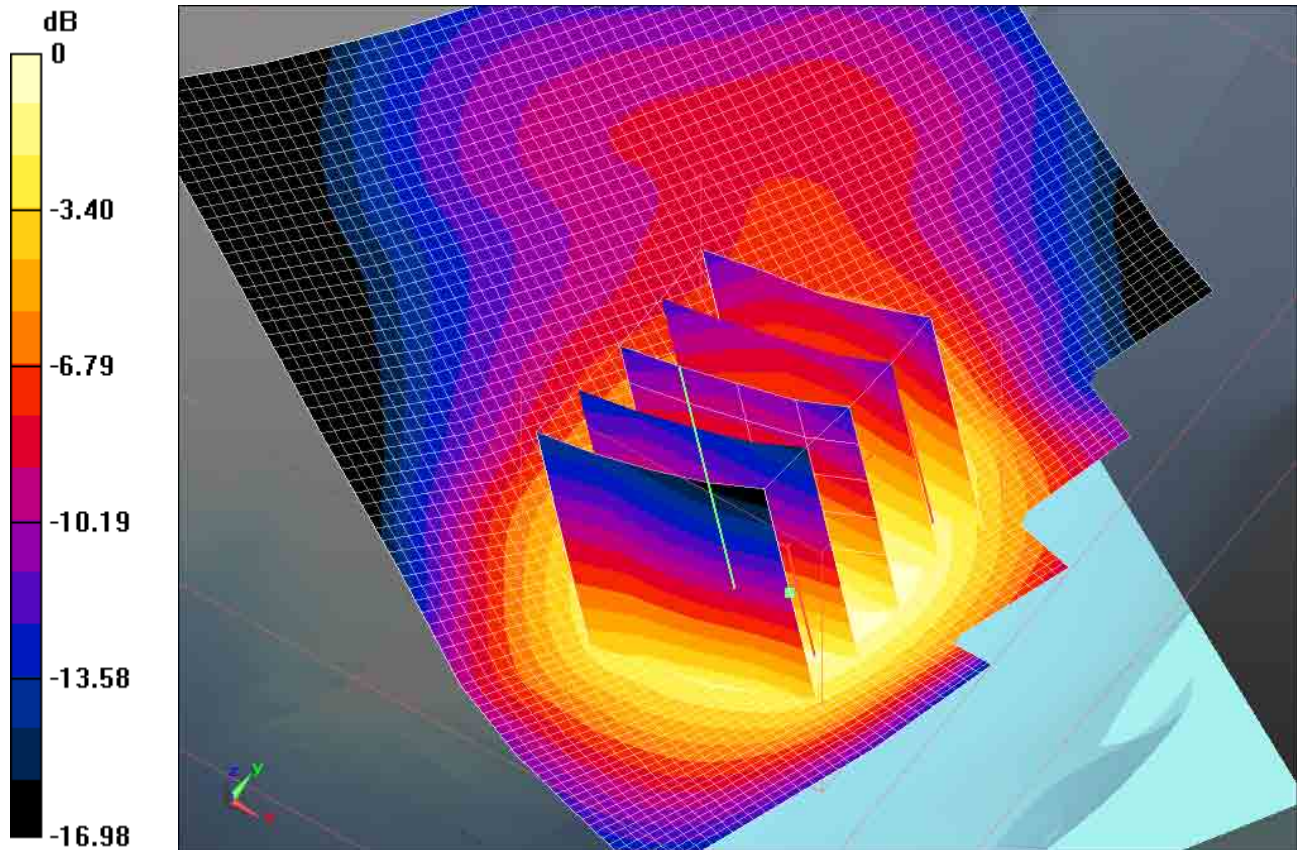

0 dB = 1.210mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 131(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/24/2011 9:19:04 PM, Date/Time: 2/24/2011 9:24:49 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_mid_chan_amb_temp_23.3_liq_temp_22.

0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.228 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.681 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.575 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.675 mW/g

Maximum value of SAR (measured) = 1.176 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

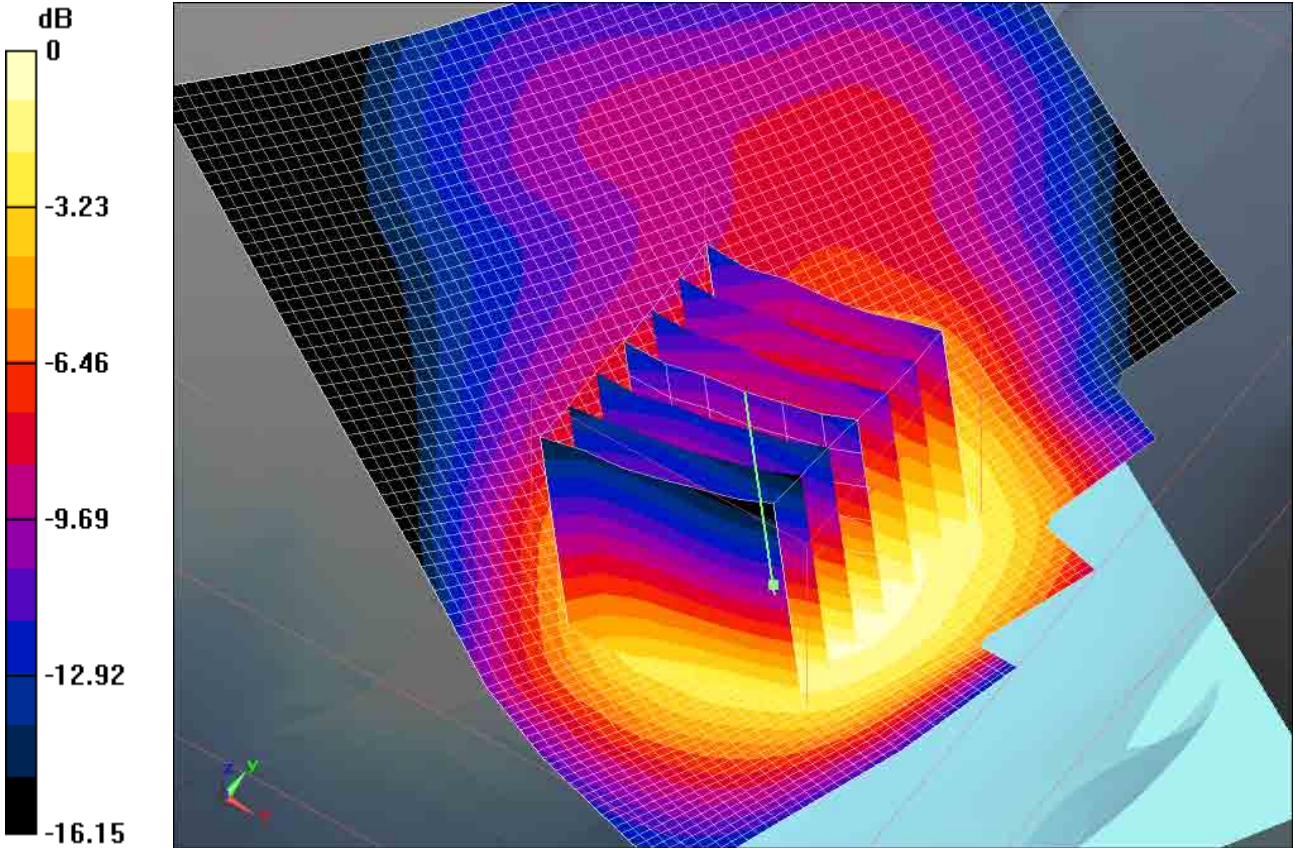

0 dB = 1.180mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 133(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/24/2011 10:04:38 PM, Date/Time: 2/24/2011 10:10:23 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_high_chan_amb_temp_23.4_liq_temp_22.

1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.341$ mho/m; $\epsilon_r = 38.431$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.114 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.410 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.457 W/kg

SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.584 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 134(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.063 mW/g

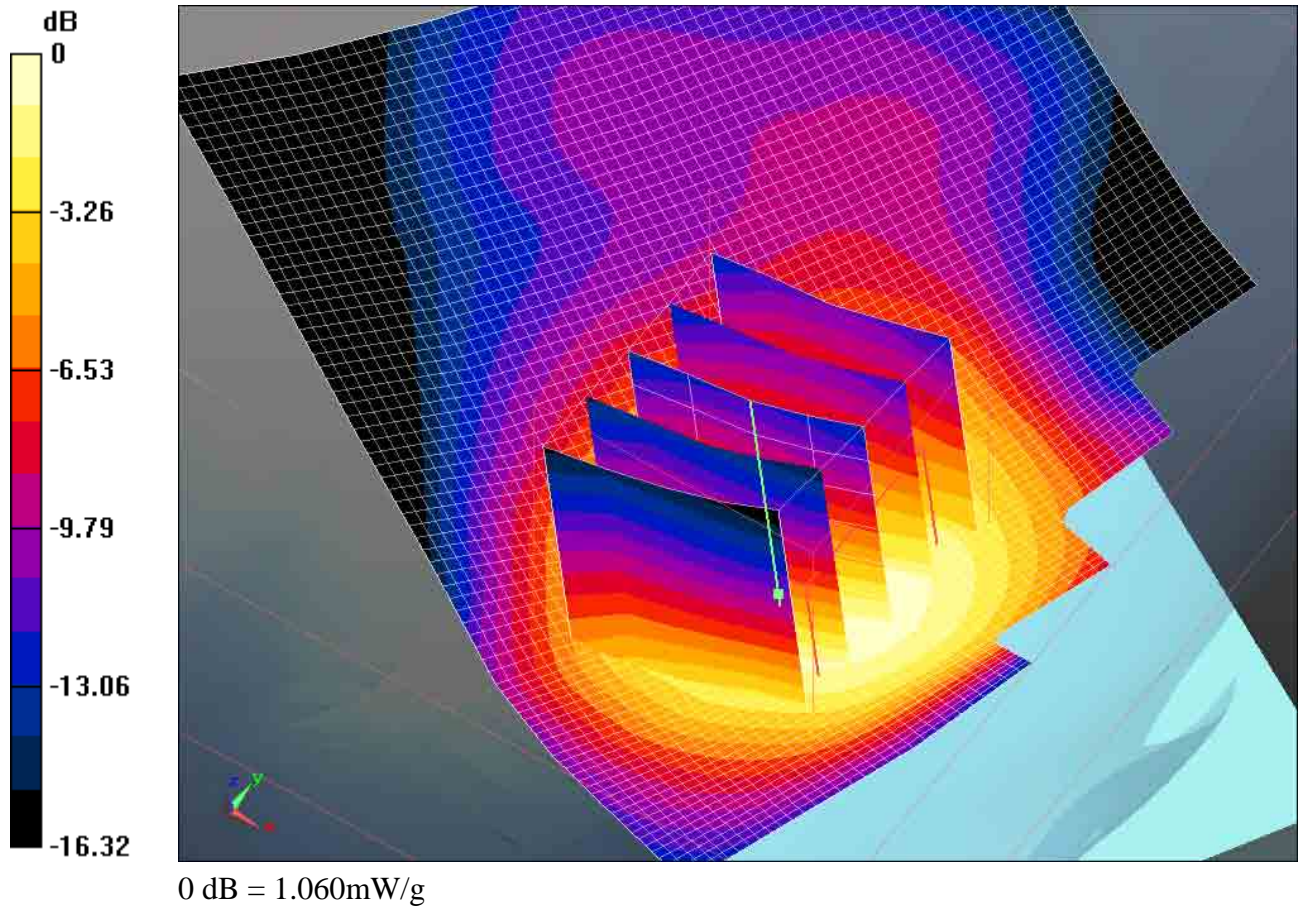

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 135(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 2/24/2011 10:19:27 PM, Date/Time: 2/24/2011 10:32:52 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_UMTS_band_II_mid_chan_amb_temp_23.3_liq_temp _22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.312$ mho/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.367 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.156 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 0.339 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18,
2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

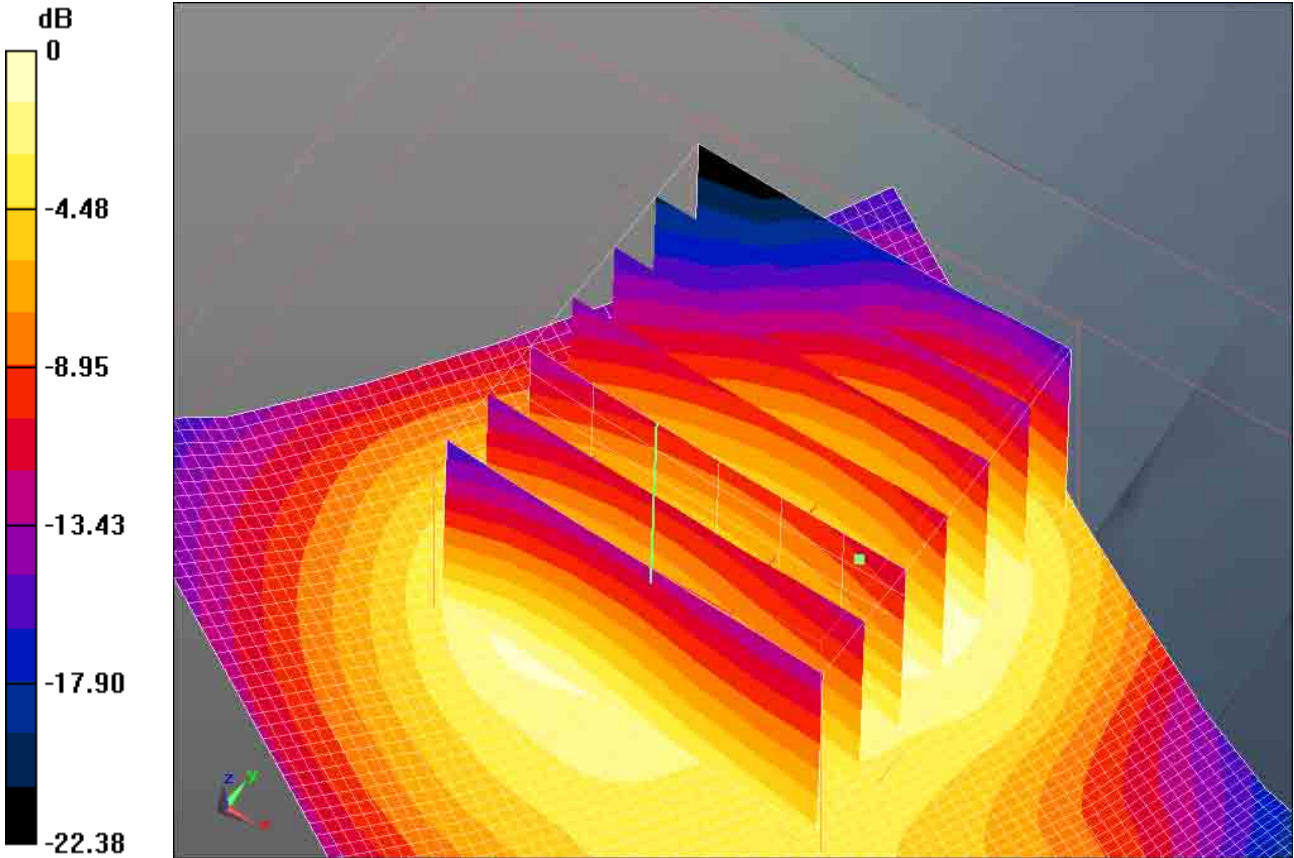

0 dB = 0.340mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 137(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 6:19:25 PM, Date/Time: 4/19/2011 6:24:46 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_II_low_chan_amb_temp_23.6_liq_temp_22 .4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.305$ mho/m; $\epsilon_r = 38.349$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.035 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.044 V/m; Power Drift = 0.0055 dB


Peak SAR (extrapolated) = 1.275 W/kg

SAR(1 g) = 0.922 mW/g; SAR(10 g) = 0.590 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 138(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.983 mW/g

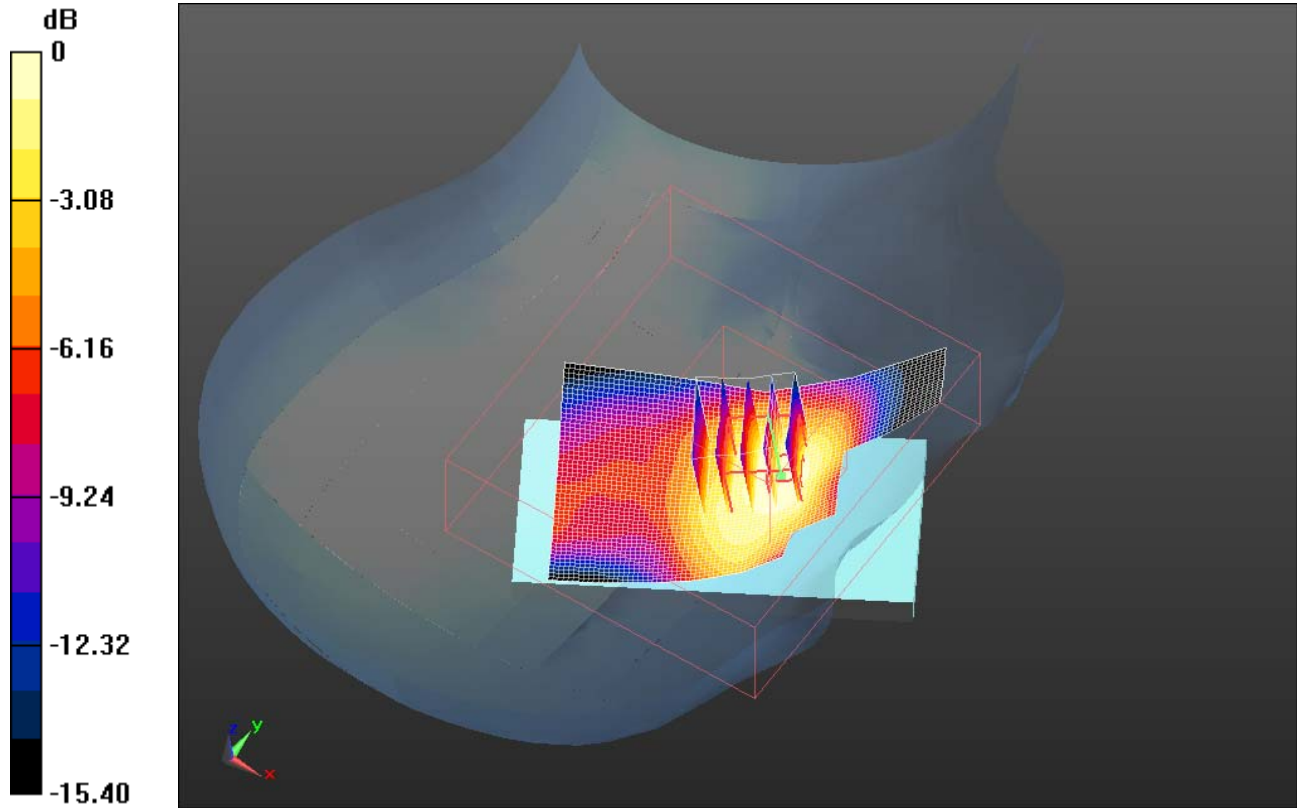

0 dB = 0.980mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 139(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/18/2011 8:40:19 PM, Date/Time: 4/18/2011 8:45:38 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_II_mid_chan_amb_temp_23.3_liq_temp_2

2.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.269 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.536 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.587 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.709 mW/g

Maximum value of SAR (measured) = 1.201 mW/g


Author Data
Andrew Becker

Dates of Test
Feb 7 – May 25, July 18, 2011


Test Report No
RTS-3933-1105-11A
RTS-2580-1106-03 Rev2

FCC ID:
L6ARDU70CW
L6ARDE70UW

IC ID
2503A-RDU70CW
2503A-RDE70UW

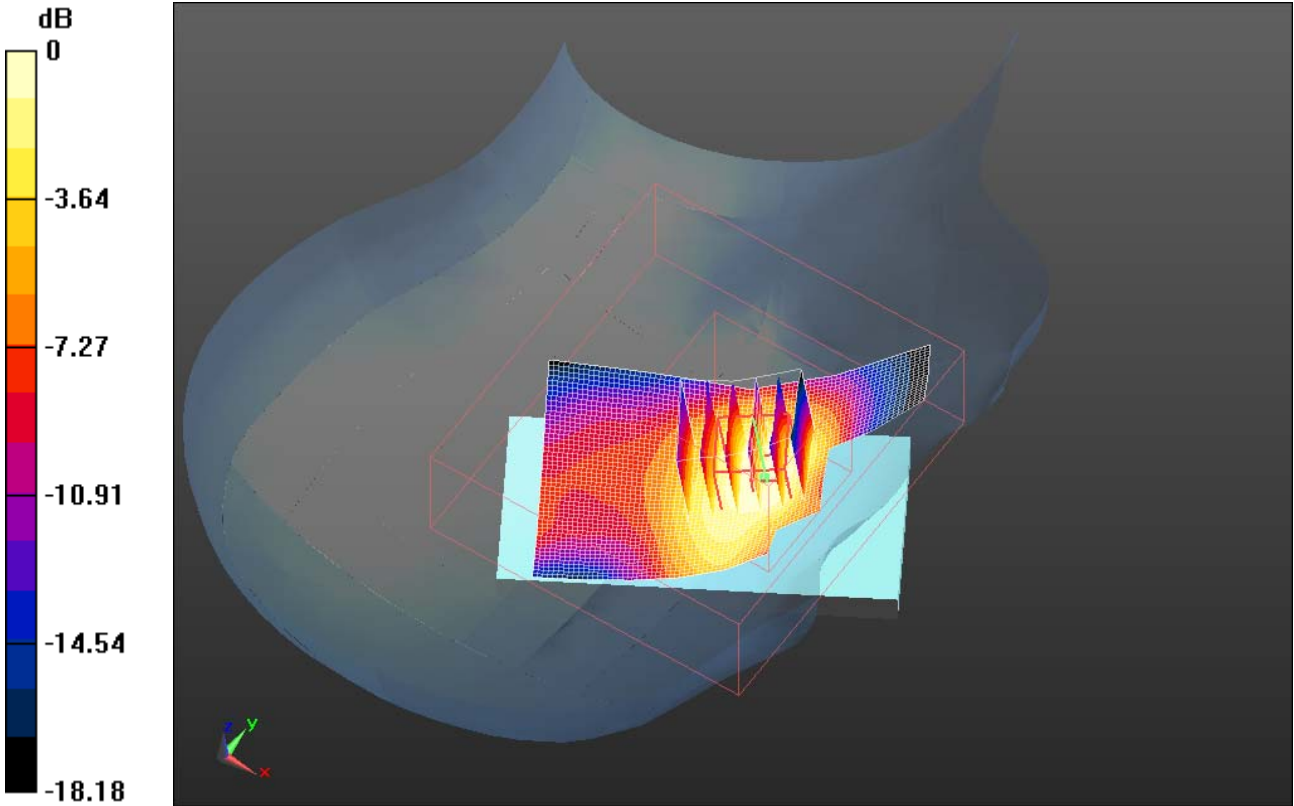

0 dB = 1.200mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 141(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/19/2011 6:38:19 PM, Date/Time: 4/19/2011 6:43:40 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_II_high_chan_amb_temp_23.6_liq_temp_2

2.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.395 \text{ mho/m}$; $\epsilon_r = 38.198$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.154 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.732 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.323 W/kg

SAR(1 g) = 0.959 mW/g; SAR(10 g) = 0.617 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 142(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.038 mW/g

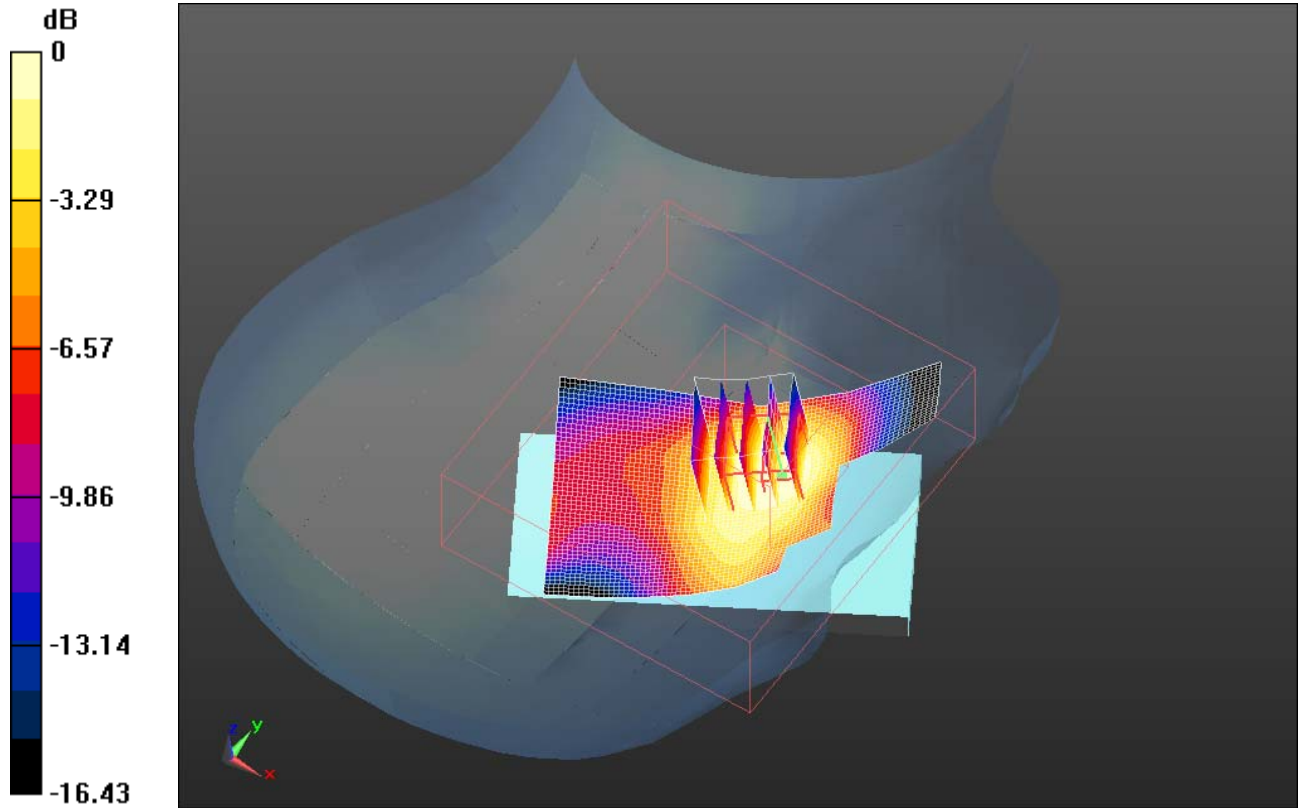

0 dB = 1.040mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 143(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/18/2011 7:40:36 PM, Date/Time: 4/18/2011 7:45:36 PM, Date/Time: 4/18/2011 7:54:32 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_low_chan_amb_temp_23.2_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.305$ mho/m; $\epsilon_r = 38.349$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.146 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.985 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 1.755 W/kg

SAR(1 g) = 0.987 mW/g; SAR(10 g) = 0.546 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 144(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 1.136 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.985 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.761 W/kg
SAR(1 g) = 0.993 mW/g; SAR(10 g) = 0.554 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.084 mW/g

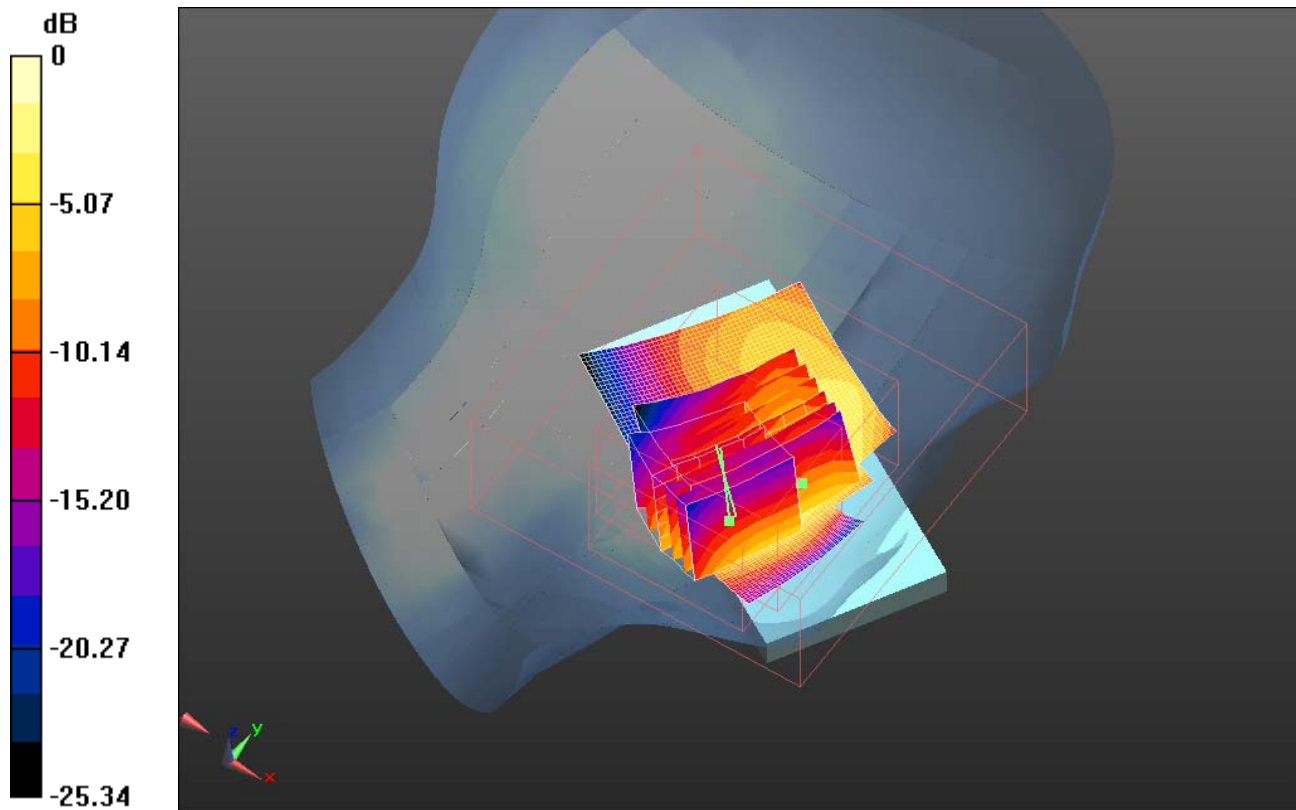

0 dB = 1.080mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 145(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/27/2011 10:30:23 PM, Date/Time: 4/27/2011 10:40:54 PM, Date/Time: 4/27/2011 10:47:10 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_mid_chan_amb_temp_23.4_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD II; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880

MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.247 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.149 V/m; Power Drift = 0.23 dB

Peak SAR (extrapolated) = 1.952 W/kg


SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.575 mW/g

Maximum value of SAR (measured) = 1.187 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x7)/Cube 0:

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 146(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.149 V/m; Power Drift = 0.27 dB
Peak SAR (extrapolated) = 2.012 W/kg
SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.582 mW/g
Maximum value of SAR (measured) = 1.247 mW/g

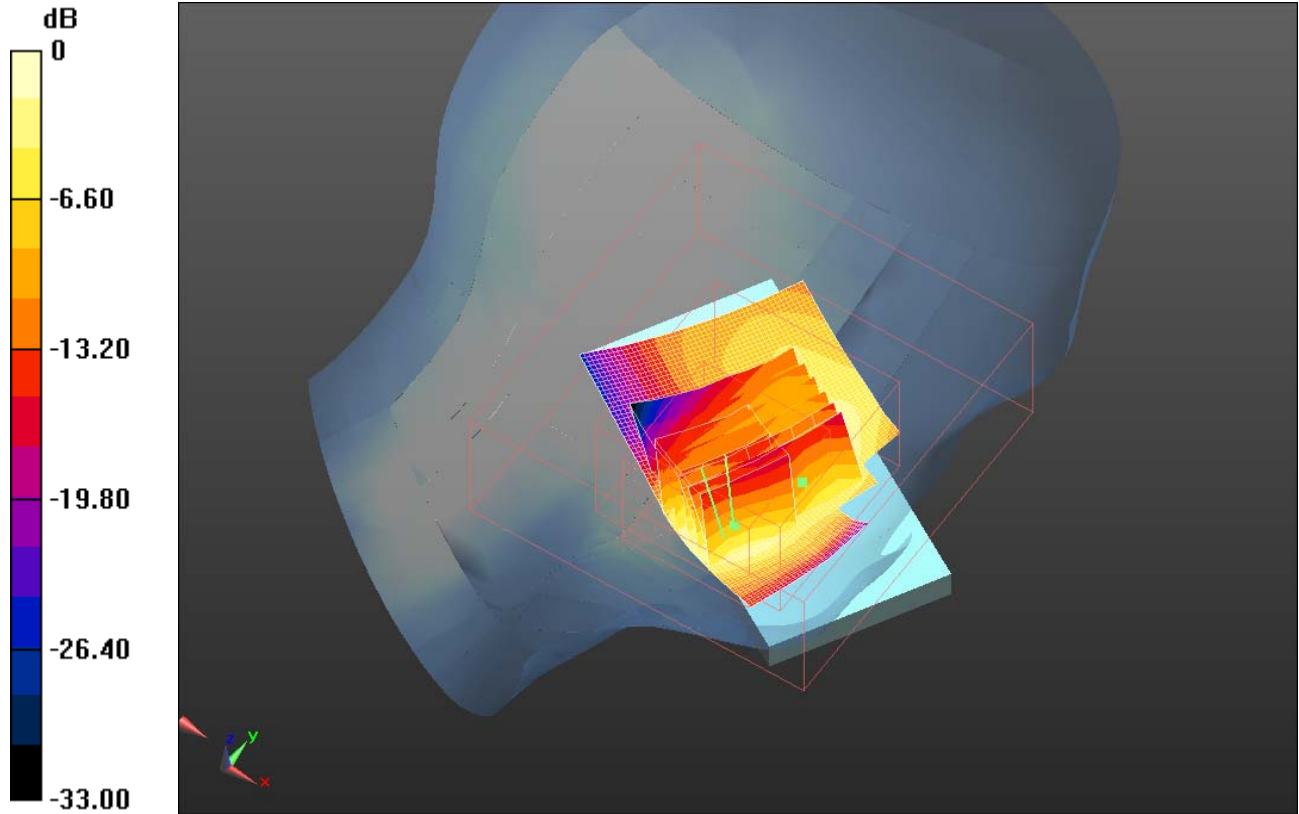

0 dB = 1.250mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 147(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Date/Time: 4/27/2011 11:00:44 PM, Date/Time: 4/27/2011 11:05:46 PM, Date/Time: 4/27/2011 11:12:15 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_high_chan_amb_temp_23.4_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD II; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1907.6

MHz;Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.395$ mho/m; $\epsilon_r = 38.198$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.168 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.115 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.913 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.531 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 148(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.166 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.115 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.983 W/kg


SAR(1 g) = 0.669 mW/g; SAR(10 g) = 0.454 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.713 mW/g

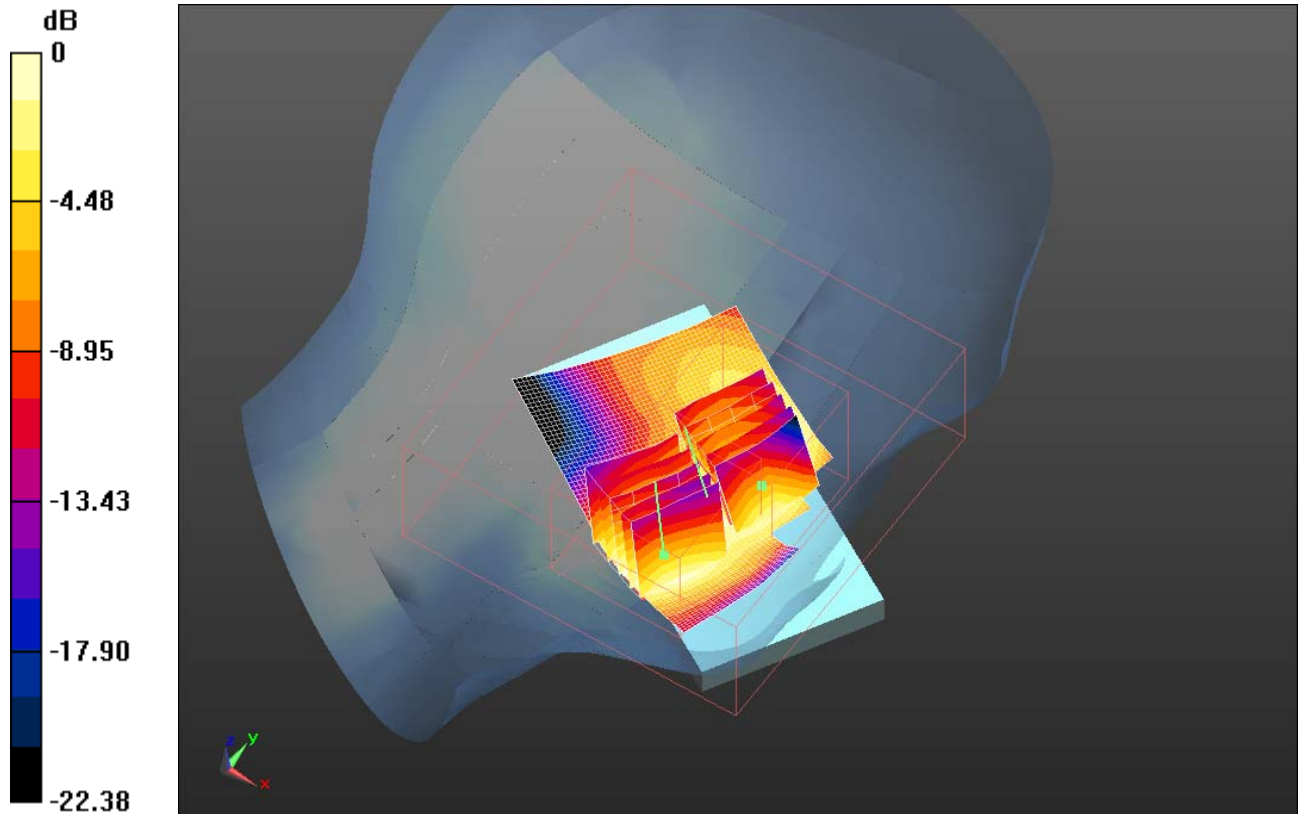

0 dB = 0.710mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 149(149)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev2	FCC ID: L6ARDU70CW L6ARDE70UW

Z axis plot for the worst case head configuration:

