	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>1(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

## SAR Compliance Test Report


<b>Testing Lab:</b>	RIM Testing Services 440 Phillip Street Waterloo, Ontario Canada N2L 5R9 Phone: 519-888-7465 Fax: 519-746-0189	<b>Applicant:</b>	Research In Motion Limited 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.rim.com
---------------------	---	-------------------	--

**Statement of Compliance:** RIM Testing Services declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.


**Device Category:** This BlackBerry® Smartphone is a portable device, designed to be used in direct contact with the user's head, hand and to be carried in approved accessories when carried on the user's body.

**RF exposure environment:** This device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in OET Bulletin 65 Supplement C (Edition 01-01), FCC 96-326, IEEE Std. C95.1-2005, Health Canada's Safety Code 6, as reproduced in RSS-102 issue 4-2010 and has been tested in accordance with the measurement procedures specified in FCC OET Procedures, OET Bulletin 65 Supplement C (Edition 01-01), ANSI/IEEE Std. C95.3-2002, IEEE 1528-2003, IEC 62209-1-2005, IEC 62209 - 2-2010 and Health Canada's Safety Code 6.

Tested and documented by:	Signatures	Date
Hang Wang Compliance Testing Associate		09-June-2011


<b>Tested and reviewed by:</b> Daoud Attayi Team Lead: Safety, SAR & HAC Compliance		09-June-2011
--	--	--------------

<b>Approved by:</b> Masud S. Attayi Manager, Regulatory Compliance		09-June-2011
--	--	--------------

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>2(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

**CONTENTS**

SAR COMPLIANCE TEST REPORT.....	1
CONTENTS.....	2
1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS.....	4
1.1 PICTURE OF DEVICE.....	4
1.2 ANTENNA DESCRIPTION.....	4
1.3 DEVICE DESCRIPTION.....	4
1.4 BODY WORN ACCESSORIES (HOLSTERS).....	7
1.5 HEADSET.....	7
1.6 BATTERY.....	7
1.7 PROCEDURE USED TO ESTABLISH TEST SIGNAL.....	8
1.8 HIGHLIGHTS OF THE FCC OET SAR MEASUREMENT REQUIREMENTS.....	8
1.8.1 SAR MEASUREMENT REQUIREMENTS FOR 3-6 GHZ AND MEASUREMENT PROCEDURES FOR 802.11 A/B/G/N TRANSMITTER.....	8
1.8.2 SAR MEASUREMENT PROCEDURES FOR 3G DEVICES.....	10
1.8.3 SAR MEASUREMENTS PROCEDURE FOR CDMA/1XEV-DO.....	11
TABLE 1.8.3: CONDUCTED RF OUTPUT POWER (DBM) MEASURED FOR VARIOUS SETTINGS 1.9 HIGHLIGHTS OF THE FCC OET SAR EVALUATION CONSIDERATIONS FOR HANDSETS WITH MULTIPLE TRANSMITTERS/ ANTENNAS & GSM/GPRS/EDGE PROCEDURE.....	12
1.9 HIGHLIGHTS OF THE FCC OET SAR EVALUATION CONSIDERATIONS FOR HANDSETS WITH MULTIPLE TRANSMITTERS/ ANTENNAS & GSM/GPRS/EDGE PROCEDURE.....	13
2.1 SAR MEASUREMENT SYSTEM.....	18
2.1.1 EQUIPMENT LIST.....	19
2.2 DESCRIPTION OF THE TEST SETUP.....	20
2.2.1 DEVICE AND BASE STATION SIMULATOR SETUP.....	20
2.2.2 DASY SETUP.....	20
3.0 ELECTRIC FIELD PROBE CALIBRATION.....	20
3.1 PROBE SPECIFICATIONS.....	20
3.2 PROBE CALIBRATION AND MEASUREMENT UNCERTAINTY.....	21
4.0 SAR MEASUREMENT SYSTEM VERIFICATION.....	21
4.1 SYSTEM ACCURACY VERIFICATION FOR HEAD ADJACENT USE.....	22
5.0 PHANTOM DESCRIPTION.....	23
6.0 TISSUE DIELECTRIC PROPERTIES.....	24
6.1 COMPOSITION OF TISSUE SIMULANT.....	24
6.1.1 EQUIPMENT.....	24
6.1.2 PREPARATION PROCEDURE.....	25
6.2 ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID.....	25
6.2.2 TEST CONFIGURATION.....	27
6.2.3 PROCEDURE.....	27
7.0 SAR SAFETY LIMITS.....	28
8.0 DEVICE POSITIONING.....	29
8.1 DEVICE HOLDER FOR SAM TWIN PHANTOM.....	29
8.2 DESCRIPTION OF THE TEST POSITIONING.....	30
8.2.1 TEST POSITIONS OF DEVICE RELATIVE TO HEAD.....	30
8.2.1.1 DEFINITION OF THE “CHEEK” POSITION.....	31
8.2.1.2 DEFINITION OF THE “TILTED” POSITION.....	32
8.2.2 BODY HOLSTER CONFIGURATION.....	32
9.0 HIGH LEVEL EVALUATION.....	33
9.1 MAXIMUM SEARCH.....	33
9.2 EXTRAPOLATION.....	33
9.3 BOUNDARY CORRECTION.....	33
9.4 PEAK SEARCH FOR 1G AND 10G CUBE AVERAGED SAR.....	33
10.0 MEASUREMENT UNCERTAINTY.....	34
11.0 TEST RESULTS.....	36
11.1 SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE HEAD.....	36
11.2 SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE BODY USING ACCESSORIES.....	43
12.0 REFERENCES.....	48

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>3(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>


APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION

APPENDIX B: SAR DISTRIBUTION PLOTS - HEAD CONFIGURATION

APPENDIX C: SAR DISTRIBUTION PLOTS - BODY-WORN CONFIGURATION

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

APPENDIX E: PHOTOGRAPHS

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>4(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

## 1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

### 1.1 Picture of Device

Please refer to Appendix E.  
**Figure 1.1.1 BlackBerry Smartphone**


### 1.2 Antenna description

<b>Type</b>	Internal fixed antenna
<b>Location</b>	Back bottom centre (main licensed transmitters)
<b>Configuration</b>	Internal fixed antenna

**Table 1.2.1. Antenna description**

### 1.3 Device description

<b>Device Model</b>	RDH71CW			
<b>FCC ID</b>	L6ARDH70CW			
<b>IC ID</b>	2503A-RDH70CW			
<b>PIN</b>	329A77DF (Radiated Rev1), 32DF5ED2 (Radiated Rev2), 329CDE2B (Conducted), 32EE924B (Conducted Rev3)			
<b>Hardware Version</b>	Rev 1/Rev2/Rev3			
<b>Software Version</b>	6.1.0.106/392, 7.0.0.984			
<b>Prototype or Production Unit</b>	Production			
<b>Mode(s) of Operation in North America</b>	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
<b>Maximum nominal conducted RF Output Power (dBm)</b>	32.5 29.0	30.0 26.0	28.5 24.5	26.5 23.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.50	± 0.50	± 0.50	± 0.50
<b>Duty Cycle</b>	1:8	2:8	3:8	4:8
<b>Transmitting Tx Frequency Range (MHz)</b>	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
<b>Mode(s) of Operation in North America</b>	CDMA 2000 1xEVDO 800	CDMA 2000 1xEVDO 1900	802.11b	802.11g
<b>Maximum nominal conducted RF Output Power (dBm)</b>	24.0	23.5	18.0	15.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.50	± 0.50	± 0.50	± 0.50
<b>Duty Cycle</b>	1:1	1:1	1:1	1:1
<b>Transmitting Tx Frequency Range (MHz)</b>	2412-2462	2412-2462	2412-2462	2412-2462


	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>5(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

<b>Mode(s) of Operation in North America</b>	802.11n	Bluetooth		
<b>Maximum nominal conducted RF Output Power (dBm)</b>	15.5	7.00		
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.50	N/A		
<b>Duty Cycle</b>	1:1	N/A		
<b>Transmitting Tx Frequency Range (MHz)</b>	2412-2462	2402-2883		

**Table 1.3.1. Test device description for RDH71CW**

The device supports GSM/GPRS/EDGE 900/1800 MHz bands and UMTS band I that are not operational in North America, therefore no data is presented in this report for those bands.

<b>Device Model</b>	RDP71UW			
<b>FCC ID</b>	L6ARDP70UW			
<b>IC ID</b>	2503A-RDP70UW			
<b>PIN</b>	25FC37FC (Radiated Rev1), 26F8E944 (Radiated Rev2), 25FB01DF (Conducted Rev1)			
<b>Hardware Version</b>	Rev 1, Rev2			
<b>Software Version</b>	6.1.0.132/301/421			
<b>Prototype or Production Unit</b>	Production			
<b>Mode(s) of Operation in North America</b>	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
<b>Maximum nominal conducted RF Output Power (dBm)</b>	32.5 29.0	30.0 26.0	28.5 24.5	26.5 23.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.50	± 0.50	± 0.50	± 0.50
<b>Duty Cycle</b>	1:8	2:8	3:8	4:8
<b>Tx Frequency Range (MHz)</b>	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
<b>Mode(s) of Operation in North America</b>	WCDMA / UMTS FDD V (850)	WCDMA / UMTS FDD II (1900)	802.11b	802.11g
<b>Maximum nominal conducted RF Output Power (dBm)</b>	24.0	23.5	18.0	15.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.50	± 0.50	± 0.50	± 0.50
<b>Duty Cycle</b>	1:1	1:1	1:1	1:1
<b>Tx Frequency Range (MHz)</b>	824.6 – 846.6	1852.4 – 1907.6	2412-2462	2412-2462


	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			Page <b>6(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>

<b>Mode(s) of Operation in North America</b>	802.11n	Bluetooth		
<b>Maximum nominal conducted RF Output Power (dBm)</b>	15.5	7.00		
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.50	N/A		
<b>Duty Cycle</b>	1:1	N/A		
<b>Tx Frequency Range (MHz)</b>	2412-2462	2402-2883		

**Table 1.3.2 Test device description for RDP71UW**

**Note 1:** Device model: RDP71UW supports GSM/GPRS/EDGE 900/1800 MHz bands and UMTS band I that are not operational in North America, therefore no data is presented in this report for those bands.

**Note 2:** According to manufacturer's hardware similarity declaration document, the two models (RDH71CW and RDP71UW) have identical design. Please refer to the declaration for more detail. The difference is model: RDP71UW does not support CDMA 2000 bands, instead it supports UMTS band II and V.

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>7(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

#### 1.4 Body worn accessories (holsters)

The device has been tested with the holsters listed below. The holster is designed with the intended device orientation being with the LCD facing the belt clip. Proper positioning is vital for protection of the LCD display, and to help maximize the battery life of the device. The device can also be placed in the holster with the backside facing the belt clip. Body SAR measurements were carried out with the worst-case configuration front LCD side and backside towards the belt clip.

Number	Holster Type	Part Number	Separation distance (mm)
1	Vertical Holster	HDW-38954-001	20
*2	Vertical Holster (alt.)	HDW-38955-001	20

**\*Identical design, but made of a different type of material. Separation distance is identical**

**Table 1.4.1. Body worn holster**

Please refer to Appendix E.

**Figure 1.4.1. Body-worn holster**

#### 1.5 Headset


The device was tested with and without the following headset model numbers.

- 1) HDW-14322-003
- 2) HDW-15766-005
- 3) HDW-24529-001

#### 1.6 Battery

The device was tested with the following Lithium Ion Battery pack.

- 1) BAT-30615-006

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>8(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

## 1.7 Procedure used to establish test signal


The device was put into test mode for SAR measurements by placing a voice call from a Rohde & Schwarz CMU 200 Communications Test Instrument. The power control level was set to command the device to transmit at full power at the specified frequency. Other parameters include: Channel type = full rate, discontinuous transmission off, frequency hopping off.

## 1.8 Highlights of the FCC OET SAR Measurement Requirements

### 1.8.1 SAR Measurement Requirements for 3-6 GHz and Measurement Procedures for 802.11 a/b/g/n Transmitter

- Maintained dielectric parameter uncertainty as close to  $\pm 5.0\%$  of the target value as possible.
- Liquid depth from SAM ERP or flat phantom was kept at 15 cm.
- Frequency Channel Configuration: 802.11 b/g modes are tested on “default test channels” 1, 6 and 11.
- For each frequency band, testing at higher rates and higher modulations is not required when the maximum average output power for each of these configurations is less than  $\frac{1}{4}$  dB higher than those measured at the lowest data rate.
- SAR is not required for 802.11g/n channels when the maximum average output power is less than  $\frac{1}{4}$  dB higher than that measured on the corresponding 802.11b channels.
- SAR test was conducted on each “default test channel” and each band with the worst case modulation and highest duty cycle.



	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>9(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>


- Conducted power measurements:

802.11b @ 1Mbps		802.11g @ 6Mbps		802.11n @ 6.5 Mbps	
Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)
1	17.91	1	15.44	1	15.30
6	18.10	6	15.61	6	15.41
11	18.45	11	15.96	11	15.80

**Table 1.8.1. 802.11 b/g channel vs. conducted power**

Data Rate (Mbps)	Mod.	802.11g	Data Rate (Mbps)	Mod.	802.11b
		Channel 6 Cond. Power (dBm)			Channel 6 Cond. Power (dBm)
6	BPSK	15.61	1	BPSK	18.10
9	BPSK	15.22	2	DQPSK	17.84
12	QPSK	13.62	5.5	CCK	17.20
18	QPSK	12.95	11	CCK	16.70
24	16-QAM	11.71	22	CCK	18.10
36	16-QAM	10.75			
48	64-QAM	10.00			
54	64-QAM	10.00			
			802.11 n		
Data Rate (Mbps)		Mod.	Channel 6 Cond. Power (dBm)		
6.5		MCS0	15.41		
13		MCS1	13.51		
19.5		MCS2	12.81		
26		MCS3	11.67		
39		MCS4	10.91		
52		MCS5	10.41		
58.5		MCS6	10.31		
65		MCS7	9.67		

**Table 1.8.2. 802.11 a/b/g modulation type/data rate vs. conducted power**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>10(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

## 1.8.2 SAR Measurement Procedures for 3G Devices

### WCDMA Handsets

#### Output Power Verification


- Maximum output power is verified on the High, Middle and Low channels using 12.2 kbps RMC, 12.2 kbps AMR with a 3.4 kbps SRB (signal radio bearer) with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or applying the required inner loop.
- For Release 5 HSDPA, output power is measured according to requirements for HS-DPCCH Sub-test 1-4

#### Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

#### Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. SAR for other spreading codes and multiple DPDCH<sub>n</sub>, when supported by the DUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH<sub>n</sub> configuration, are less than ¼ dB higher than those measured in 12.2 RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH<sub>n</sub> using the exposure configuration that results in the highest SAR with 12.2 RMC.

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>11(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

### Handsets with HSPA


Body SAR is not required for handsets with HSPA capabilities, when the maximum average output of each RF channel with HSPA active is less than ¼ dB higher than that measured in 12.2 kbps RMC without HSPA. Otherwise, SAR for HSPA is measured using FRC (fixed reference channel) in the body exposure configuration that results in the highest SAR for that RF channel in 12.2kbps RMC.

	Band	FDD V (850)			FDD II (1900)		
	Channel	4132	4182	4233	9262	9400	9538
	Freq (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6
Mode	Subtest	Max burst averaged conducted power (dBm)			Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	24.30	24.28	24.10	23.33	23.57	23.24
Rel99	12.2 kbps AMR, SRB 3.4 kbps	24.20	24.35	24.00	23.39	23.67	23.37
Rel5 HSDPA	1	24.20	24.15	23.90	23.20	23.52	23.20
Rel5 HSDPA	2	24.23	24.10	23.95	23.31	23.55	23.24
Rel5 HSDPA	3	24.20	24.12	23.95	23.20	23.61	23.21
Rel5 HSDPA	4	24.29	24.13	23.90	23.30	23.70	23.30
Rel6 HSUPA	1	24.31	24.09	23.96	23.25	23.65	23.24
Rel6 HSUPA	2	24.25	24.10	23.97	23.40	23.60	23.30
Rel6 HSUPA	3	24.22	24.05	23.95	23.35	23.68	23.28
Rel6 HSUPA	4	24.25	24.12	23.92	23.34	23.62	23.35
Rel6 HSUPA	5	24.13	24.10	23.92	23.30	23.53	23.34

**Table 1.8.3. WCDMA (Rel99) / HSPA conducted power measurements**


### 1.8.3 SAR Measurements Procedure for CDMA/1xEv-DO

For handsets with Ev-Do capabilities, when the maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT), body SAR for Ev-Do is not required. Otherwise, SAR for Rev. 0 is measured on the maximum output channel at 153.6 kbps using the body exposure configuration that results in the highest SAR for that channel in RC3. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel for Rev. A using a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations. A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots should be configured in the downlink for both Rev. 0 and Rev. A.

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>12(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

<b>Band</b>	<b>Channe l</b>	<b>1x EvDO (153.6kbps) Rel. 0 / Rel. A</b>	<b>CDMA2000 RC</b>	<b>SO2 Loopback</b>	<b>SO55 Loopback</b>	<b>TDSO SO32 Test Data Service</b>
CDMA 800	1013	24.2 / 24.2	<b>RC1</b>	24.3	24.4	N/A
			<b>RC3</b>	24.2	24.2	24.2
	384	24.1 / 24.1	<b>RC1</b>	24.2	24.3	N/A
			<b>RC3</b>	24.1	24.1	24.1
	777	23.5 / 23.4	<b>RC1</b>	24.2	24.1	N/A
			<b>RC3</b>	24.0	24.0	24.2
<b>Band</b>	<b>Channe l</b>	<b>1x EvDO (153.6kbps) Rel. 0 / Rel. A</b>	<b>CDMA2000 RC</b>	<b>SO2 Loopback</b>	<b>SO55 Loopback</b>	<b>TDSO SO32 Test Data Service</b>
CDMA 1900	25	23.8 / 23.9	<b>RC1</b>	23.7	23.5	N/A
			<b>RC3</b>	23.6	23.6	23.5
	600	23.8 / 23.8	<b>RC1</b>	23.9	23.8	N/A
			<b>RC3</b>	23.7	23.7	23.7
	1175	23.8 / 23.8	<b>RC1</b>	23.7	23.6	N/A
			<b>RC3</b>	23.5	23.6	23.6

**Table 1.8.4. Conducted RF output power (dBm) measured for various settings**

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>13(49)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Hang Wang</b>	<b>Jan 14 – June 09, 2011</b>	<b>RTS-2605-1102-05A</b>	<b>L6ARDH70CW</b> <b>L6ARDP70UW</b>	<b>2503A-RDH70CW</b> <b>2503A-RDP70UW</b>

## 1.9 Highlights of the FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters/ Antennas & GSM/GPRS/EDGE Procedure

### Unlicensed Transmitters

When there is simultaneous transmission –  
Stand-alone SAR not required when

- output  $\leq 2 \cdot P_{Ref}$  and antenna is  $> 5.0$  cm from other antennas
- output  $\leq P_{Ref}$  and antenna is  $> 2.5$  cm from other antennas
- the other antenna(s), which are  $< 2.5$  cm away, has an output  $\leq P_{Ref}$  OR max 1g SAR  $< 1.2$  W/kg

Otherwise stand-alone SAR is required

- test SAR on highest output channel for each wireless mode and exposure condition
- if SAR for highest output channel is  $> 50\%$  of SAR limit, evaluate all channels according to normal procedure

### Simultaneous Transmission SAR not required:

Unlicensed only

- when stand-alone 1-g SAR is not required and antenna is  $> 5$  cm from other antennas
- when the other antenna(s), which are  $< 2.5$  cm away, has an output  $\leq P_{Ref}$  OR max 1g SAR  $< 1.2$  W/kg

Licensed & Unlicensed

- when the sum of the 1-g SAR is  $< 1.6$  W/kg for each pair of simultaneous transmitting antennas.
- or
- when the ratio of SAR to peak SAR separation distance of simultaneous transmitting antenna pair is  $< 0.3$


### Simultaneous Transmission SAR required:


Licensed & Unlicensed

- antenna pairs with SAR to antenna separation ratio  $\geq 0.3$ ; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition.


	2.45	5.15 - 5.35	5.47 - 5.85	GHz
$P_{Ref}$	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

**Table 1.9.1. Output Power Thresholds for Unlicensed Transmitters**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>		Page <b>14(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>
			IC ID <b>2503A-RDH70CW</b> <b>2503A-RDP70UW</b>

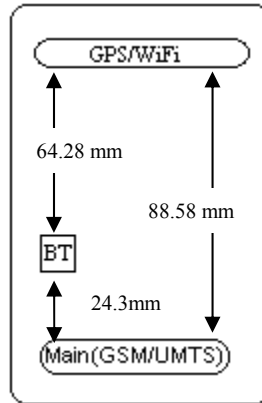

**Figure 1.9.1. Back view of device showing closest distance between antenna pairs**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>15(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

Mode	Configuration	Highest 1 g SAR (W/kg)
GSM/GPRS/EDGE/ CDMA/WCDMA	Head-Right-Touch	1.12
	Body-Vertical Holster Back with HS	0.86
802.11b/g/n	Head-Right-Touch	0.19
	Body-Vertical Holster Back with HS	0.06

**Table 1.9.2. Highest SAR values for the same setup**

**BT & WiFi:** BT Stand-alone and Simultaneous Transmission SAR are not required, since WiFi antenna is > 5.0 cm away

**BT & GSM/WCDMA:** BT Stand-alone and Simultaneous Transmission SAR are not required, since other antennas are <2.5 cm

**GSM & WiFi:** Simultaneous Transmission SAR is not required for head/body configuration based on the sum of 1-g SAR values for each pair of simultaneous transmitting antennas being < 1.6W/kg.

**WCDMA & WiFi:** Simultaneous Transmission SAR is not required for head configuration based on ratio of SAR to peak SAR separation distance is < 0.3

- The device supports DTM, GPRS Category Class A, Multi-Slot Class 12 with maximum 5 s-slots (4-slots uplink and 1-slot downlink).
- For head SAR configuration, GSM 1-slot (CS) uplink and 2/3/4-slots DTM {GSM (SC) + EDGE (PD)} were evaluated.
- For body SAR configuration, 2/3/4-slots GPRS (PD) mode were tested.
- In EDGE/GPRS mode, GMSK Modulation was used using CS1-CS4 or MCS1-MCS4.
- 8-PSK modulation or MCS5-MCS9 code scheme were avoided since maximum burst avg power was measured lower on those modulation schemes.
- Each slot is set to maximum power, but there is software power reduction of ~ 2/4/6 dB in DTM/EDGE/GPRS 2/3/4-slots uplink modes.

Please refer to the conducted power measurements table below:



Document

**SAR Compliance Test Report for the BlackBerry® Smartphone  
Model RDH71CW/RDP71UW**

Page

**16(49)**

Author Data

**Hang Wang**

Dates of Test

**Jan 14 – June 09, 2011**

Test Report No

**RTS-2605-1102-05A**

FCC ID:


**L6ARDH70CW  
L6ARDP70UW**

IC ID

**2503A-RDH70CW  
2503A-RDP70UW**


<b>Mode</b>	<b>Freq. (MHz)</b>	<b>Max burst averaged conducted power (dBm) CS1</b>	<b>Max burst averaged conducted power (dBm) CS4</b>	<b>Max burst averaged conducted power (dBm) MCS1</b>	<b>Max burst averaged conducted power (dBm) MCS4</b>	<b>Max burst averaged conducted power (dBm) MCS5</b>	<b>Max burst averaged conducted power (dBm) MCS9</b>
2-slots GPRS 850 MHz	824.2	30.2	30.0	N/A	N/A	N/A	N/A
	836.8	30.1	30.0	N/A	N/A	N/A	N/A
	848.8	30.0	29.8	N/A	N/A	N/A	N/A
3-slots GPRS 850 MHz	824.2	28.5	28.4	N/A	N/A	N/A	N/A
	836.8	28.3	28.3	N/A	N/A	N/A	N/A
	848.8	28.4	28.3	N/A	N/A	N/A	N/A
4-slots GPRS 850 MHz	824.2	26.9	26.8	N/A	N/A	N/A	N/A
	836.8	27.0	27.0	N/A	N/A	N/A	N/A
	848.8	27.0	26.9	N/A	N/A	N/A	N/A
2-slots EDGE/DTM 850 MHz	824.2	30.0	29.9	30.0	29.9	N/A	N/A
	836.8	30.0	29.9	29.9	29.9	N/A	N/A
	848.8	29.8	29.7	29.8	29.7	N/A	N/A
3-slots EDGE/DTM 850 MHz	824.2	28.5	28.4	28.5	28.4	N/A	N/A
	836.8	28.3	28.3	28.3	28.2	N/A	N/A
	848.8	28.3	28.3	28.3	28.2	N/A	N/A
4-slots EDGE/DTM 850 MHz	824.2	26.8	26.7	26.7	26.7	N/A	N/A
	836.8	26.9	26.9	26.9	26.8	N/A	N/A
	848.8	26.9	26.9	26.8	26.8	N/A	N/A
2-slots GPRS 1900 MHz	1850.2	26.0	26.1	N/A	N/A	N/A	N/A
	1880.0	26.1	26.1	N/A	N/A	N/A	N/A
	1909.8	26.1	26.1	N/A	N/A	N/A	N/A
3-slots GPRS 1900 MHz	1850.2	24.4	24.4	N/A	N/A	N/A	N/A
	1880.0	24.4	24.4	N/A	N/A	N/A	N/A
	1909.8	24.2	24.2	N/A	N/A	N/A	N/A
4-slots GPRS 1900 MHz	1850.2	23.3	23.5	N/A	N/A	N/A	N/A
	1880.0	23.3	23.3	N/A	N/A	N/A	N/A
	1909.8	23.1	23.3	N/A	N/A	N/A	N/A
2-slots EDGE/DTM 1900MHz	1850.2	26.1	26.2	26.1	26.0	25.9	25.8
	1880.0	26.2	26.3	26.2	26.3	26.2	26.0
	1909.8	26.2	26.2	26.1	26.2	26.1	26.0
3-slots EDGE/DTM 1900MHz	1850.2	24.5	24.3	24.5	24.3	24.4	24.2
	1880.0	24.5	24.3	24.5	24.3	24.4	24.2
	1909.8	24.3	24.1	24.3	24.1	24.2	24.0
4-slots EDGE/DTM 1900MHz	1850.2	23.4	23.6	23.4	23.6	23.3	23.4
	1880.0	23.4	23.4	23.4	23.4	23.3	23.3
	1909.8	23.2	23.4	23.2	23.4	23.1	23.3



	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>17(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

<b>Mode</b>	<b>Freq. (MHz)</b>	<b>Max burst averaged conducted power (dBm)</b>
1-slot GSM (CS) 850 MHz	824.2	32.7
	836.8	32.7
	848.8	32.6
1-slot GSM (CS) 1900 MHz	1850.2	28.8
	1880.0	28.7
	1909.8	28.7

### 1.9.3. GSM/EDGE/GPRS channel vs. conducted power

	Document		Page	
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>		<b>18(49)</b>	
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW</b> <b>2503A-RDP70UW</b>


## 2.0 DESCRIPTION OF THE TEST EQUIPMENT

### 2.1 SAR measurement system


SAR measurements were performed using a Dosimetric Assessment System (DASY4/52), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY 4/52 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module that performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector that is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
- The functions of the PC plug-in card based on a DSP is to perform the time critical tasks such as signal filtering, surveillance of the robot operation fast movement interrupts.
- A computer operating Windows 2000.
- DASY 4 software version 4.7; or DASY52 software version 52.6(2).
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM Twin Phantom enabling testing left-hand and right-hand usage.
- The device holder for mobile phones.
- Tissue simulating liquid mixed according to the given recipes (see section 6.1).
- System validation dipoles allowing for the validation of proper functioning of the system.

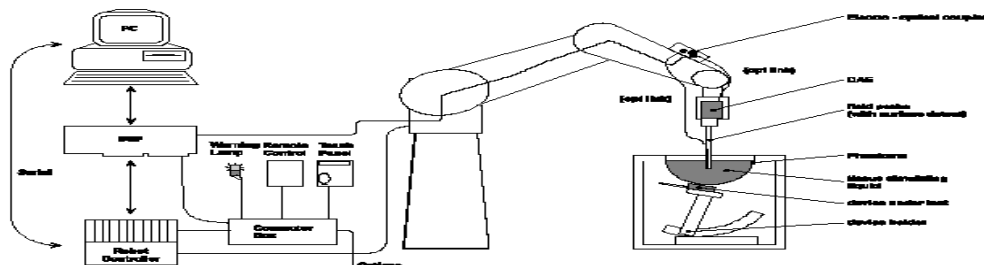


**Figure 2.1.1. System Description**

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>19(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

### 2.1.1 Equipment List

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	E-field probe	ET3DV6	1643	03/09/2011
SCHMID & Partner Engineering AG	E-field probe	ET3DV6	1644	11/16/2011
SCHMID & Partner Engineering AG	E-field probe	ES3DV3	3225	01/13/2012
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3 V1	472	05/17/2011
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3 V22	473	01/21/2012
SCHMID & Partner Engineering AG	Dipole Validation Kit	D835V2	446	01/21/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1900V2	545	01/13/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D2450V2	747	11/11/2011
Agilent Technologies	Signal generator	8648C	4037U03155	09/24/2011
Agilent Technologies	Power meter	E4419B	GB40202821	09/15/2011
Agilent Technologies	Power sensor	8481A	MY41095417	09/23/2011
Agilent Technologies	Power sensor	N1921A	SG45240281	05/22/2011
Agilent Technologies	Power meter	N1911A	MY45100905	05/01/2011
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
Agilent Technologies	Network analyzer	8753ES	US39174857	09/17/2011
Rohde & Schwarz	Base Station Simulator	CMU 200	109747	11/25/2011

**Table 2.1.1. Equipment list**

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>20(49)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Hang Wang</b>	<b>Jan 14 – June 09, 2011</b>	<b>RTS-2605-1102-05A</b>	<b>L6ARDH70CW</b> <b>L6ARDP70UW</b>	<b>2503A-RDH70CW</b> <b>2503A-RDP70UW</b>

## 2.2 Description of the test setup

Before SAR measurements are conducted, the device and the DASYS equipment are setup as follows:

### 2.2.1 Device and base station simulator setup

- Power up the device.
- Turn on the base station simulator and set the radio channel and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the device.

### 2.2.2 DASYS setup

- Turn the computer on and log on to Windows.
- Start the DASYS software by clicking on the icon located on the Windows desktop.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position
- Align the probe by clicking the ‘Align probe in light beam’ button.
- Open a file and configure the proper parameters - probe, medium, communications system etc.
- Establish a connection between the Device and the communications test instrument. Place the Device on the stand and adjust it under the phantom.
- Start SAR measurements.


## 3.0 ELECTRIC FIELD PROBE CALIBRATION

### 3.1 Probe Specifications

SAR measurements were conducted using the dosimetric probe ET3DV3/ET3DV6, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fibre for the surface detection system and built-in shielding against static discharge. The probe is sensitive to E-fields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.

Property	Data
Frequency range	10 MHz to 4 GHz
Linearity	± 0.2 dB (30 MHz to 4 GHz)
Directivity (rotation around probe axis)	± 0.2 dB in HSL (rotation around probe axis)
Directivity (rotation normal to probe axis)	± 0.3 dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB
Probe positioning repeatability	±0.2 mm
Spatial resolution	< 0.125 mm <sup>3</sup>

**Table 3.1.1. Probe specifications**

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>21(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW</b> <b>2503A-RDP70UW</b>

### 3.2 Probe calibration and measurement uncertainty

The probe had been calibrated with an accuracy better than  $\pm 12\%$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D and below:

#### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
900	$\pm 50 / \pm 100$	$41.5 \pm 5\%$	$0.97 \pm 5\%$	6.12	6.12	6.12	0.99	$1.07 \pm 11.0\%$
1810	$\pm 50 / \pm 100$	$40.0 \pm 5\%$	$1.40 \pm 5\%$	5.14	5.14	5.14	0.46	$1.60 \pm 11.0\%$
1950	$\pm 50 / \pm 100$	$40.0 \pm 5\%$	$1.40 \pm 5\%$	4.96	4.96	4.96	0.47	$1.57 \pm 11.0\%$
2450	$\pm 50 / \pm 100$	$39.2 \pm 5\%$	$1.80 \pm 5\%$	4.53	4.53	4.53	0.41	$1.89 \pm 11.0\%$

#### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
900	$\pm 50 / \pm 100$	$55.0 \pm 5\%$	$1.05 \pm 5\%$	5.97	5.97	5.97	0.98	$1.12 \pm 11.0\%$
1810	$\pm 50 / \pm 100$	$53.3 \pm 5\%$	$1.52 \pm 5\%$	4.90	4.90	4.90	0.35	$2.07 \pm 11.0\%$
1950	$\pm 50 / \pm 100$	$53.3 \pm 5\%$	$1.52 \pm 5\%$	4.83	4.83	4.83	0.32	$2.45 \pm 11.0\%$
2450	$\pm 50 / \pm 100$	$52.7 \pm 5\%$	$1.95 \pm 5\%$	4.32	4.32	4.32	0.74	$1.27 \pm 11.0\%$

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY v4.4 and higher.

DASY v4.7/DASY 52 has been used for measurements, therefore  $\pm 100$  MHz tolerance is valid.


Measured dielectric parameters are within  $\pm 5\%$  of the probe calibration values and target values.

Expanded probe calibration uncertainty (k=2) is  $< 15\%$

### 4.0 SAR MEASUREMENT SYSTEM VERIFICATION

Prior to conducting SAR measurements, the system was validated using the dipole validation kit and the flat section of the SAM phantom. A power level of 1.0W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are within the allowed tolerances.

At above 1.5 – 2 GHz, dipoles maintain good return loss of -15 dB to -20 dB, therefore SAR measurements are limited to approximately  $\pm 100$  MHz of the probe/dipole calibration frequency.

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>22(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>


#### 4.1 System accuracy verification for head adjacent use

f (MHz)	Limits / Measured (MM/DD/YY)	SAR (W/kg) 1 g/ 10 g	Dielectric Parameters		Liquid Temp (°C)
			$\epsilon_r$	$\sigma$ [S/m]	
835	Measured (01/27/2011)	9.18/6.02	42.1	0.90	21.8
	Measured (04/20/2011)	9.10/5.17	40.1	0.88	22.1
	Recommended Limits	9.50/6.27	41.5	0.90	N/A
1900	Measured (01/19/2011)	41.0/21.3	39.8	1.34	21.9
	Measured (01/25/2011)	38.4/20.4	38.6	1.34	22.1
	Measured (04/14/2011)	36.7/19.2	39.8	1.34	21.9
	Recommended Limits	39.5/20.8	40.0	1.40	N/A
2450	Measured (01/14/2011)	57.7/26.3	38.2	1.87	22.8
	Measured (04/26/2011)	56.0/25.9	39.0	1.89	22.3
	Recommended Limits	53.2/24.8	39.2	1.80	N/A

**Table 4.1.1. System accuracy for RDH71CW (validation for head adjacent use)**

f (MHz)	Limits / Measured (MM/DD/YY)	SAR (W/kg) 1 g/ 10 g	Dielectric Parameters		Liquid Temp (°C)
			$\epsilon_r$	$\sigma$ [S/m]	
835	Measured (02/07/2011)	9.38/6.15	42.1	0.90	22.3
	Measured (04/06/2011)	9.30/6.08	42.9	0.93	21.8
	Recommended Limits	9.50/6.27	41.5	0.90	N/A
1900	Measured (02/14/2011)	38.3/20.2	38.2	1.39	22.1
	Recommended Limits	39.5/20.8	40.0	1.40	N/A

**Table 4.1.2. System accuracy for RDP71UW (validation for head adjacent use)**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>23(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

## 5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fibreglass shell integrated with a wooden table.

The SAM Twin Phantom is a fibreglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left side head
- Right side head
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with freestanding robots.


The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.

Liquid depth of  $\geq 15$  cm is maintained in the phantom for all the measurements.



**Figure 5.0.1. SAM Twin Phantom**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>24(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

## 6.0 TISSUE DIELECTRIC PROPERTIES

### 6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids for 800-900 MHz and 1800-1900 MHz are shown in the table below.

INGREDIENT	MIXTURE 800–900MHz		MIXTURE 1800–1900MHz		MIXTURE 2450 MHz	
	Brain %	Muscle %	Brain %	Muscle %	Brain %	Muscle %
Water	40.29	65.45	55.24	69.91	55.0	68.75
Sugar	57.90	34.31	0	0	0	0
Salt	1.38	0.62	0.31	0.13	0	0
HEC	0.24	0	0	0	0	0
Bactericide	0.18	0.10	0	0	0	0
DGBE	0	0	44.45	29.96	40.0	31.25
Triton X-100	0	0	0	0	5.0	0


**Table 6.1.1 Tissue simulant recipe**

#### 6.1.1 Equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A
Agilent Technologies	Network Analyzer	8753ES	US39174857	09/17/2011
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Dell	PC using GPIB card	GX110	347	N/A
Control Company	Digital Thermometer	23609-234	21352860	09/14/2011

**Table 6.1.2 Tissue simulant preparation equipment**



	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>25(49)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Hang Wang</b>	<b>Jan 14 – June 09, 2011</b>	<b>RTS-2605-1102-05A</b>	<b>L6ARDH70CW</b> <b>L6ARDP70UW</b>	<b>2503A-RDH70CW</b> <b>2503A-RDP70UW</b>

### 6.1.2 Preparation procedure

#### 800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

#### 1800-2450 MHz liquid


- Fill the container with water and place it on hotplate. Begin heating and stirring.
- Add the salt, Glycol/Triton X-100. The container must be covered to prevent evaporation.
- Keep the liquid hot enough to dissolve sugar for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

### 6.2 Electrical parameters of the tissue simulating liquid

The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are shown in the table below.

Recommended limits are adopted from IEEE P1528-2003:

“Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, DASy manual and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>


	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>26(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

f (MHz)	Tissue Type	Limits / Measured	Dielectric Parameters		Liquid Temp (°C)
			$\epsilon_r$	$\sigma$ [S/m]	
835	Head	Measured (01/27/2011)	42.1	0.90	21.8
		Measured (04/20/2011)	40.1	0.88	22.1
		Recommended Limits	41.5	0.90	N/A
	Muscle	Measured (01/27/2011)	52.5	0.96	22.0
		Measured (04/20/2011)	53.6	0.98	22.1
		Recommended Limits	55.2	0.97	N/A
1900	Head	Measured (01/19/2011)	39.8	1.34	21.9
		Measured (01/25/2011)	38.6	1.34	22.1
		Measured (04/14/2011)	39.8	1.34	21.9
		Recommended Limits	40.0	1.40	N/A
	Muscle	Measured (01/19/2011)	51.6	1.49	21.8
		Measured (01/25/2011)	51.0	1.50	22.0
		Measured (04/14/2011)	51.0	1.50	21.9
		Recommended Limits	53.3	1.52	N/A
2450	Head	Measured (01/14/2011)	38.2	1.87	22.8
		Measured (04/26/2011)	39.0	1.89	22.3
		Recommended Limits	39.2	1.80	N/A
	Muscle	Measured (01/14/2011)	50.1	2.05	22.9
		Measured (04/26/2011)	50.2	2.02	22.4
		Recommended Limits	52.7	1.95	N/A

**Table 6.2.1. Electrical parameters of tissue simulating liquid (RDH71CW)**

f (MHz)	Tissue Type	Limits / Measured	Dielectric Parameters		Liquid Temp (°C)
			$\epsilon_r$	$\sigma$ [S/m]	
835	Head	Measured (02/07/2011)	42.1	0.90	22.3
		Measured (04/06/2011)	42.9	0.93	21.8
		Recommended Limits	41.5	0.90	N/A
	Muscle	Measured (02/07/2011)	52.8	0.96	22.0
		Measured (04/06/2011)	56.2	0.93	22.0
		Recommended Limits	55.2	0.97	N/A
1900	Head	Measured (02/14/2011)	38.2	1.39	22.1
		Recommended Limits	40.0	1.40	N/A
	Muscle	Measured (02/14/2011)	50.6	1.56	22.3
		Recommended Limits	53.3	1.52	N/A

**Table 6.2.2. Electrical parameters of tissue simulating liquid (RDP71UW)**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>		Page <b>27(49)</b>	
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>

### 6.2.2 Test Configuration

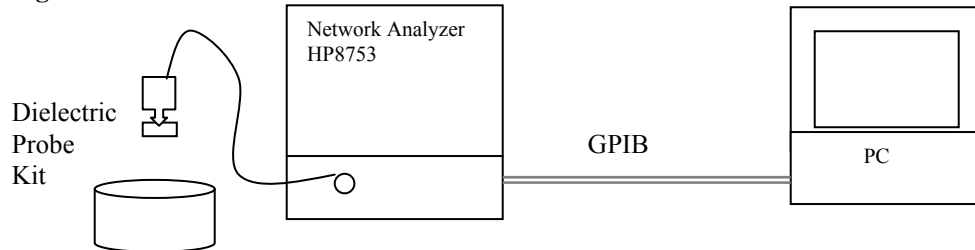



Figure 6.2.1 Test configuration

### 6.2.3 Procedure

1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ( $\pm 1^\circ$ ).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.
6. Relative permittivity  $\epsilon_r = \epsilon'$  and conductivity can be calculated from  $\epsilon''$   

$$\sigma = \omega \epsilon_0 \epsilon''$$
7. Measure liquid shortly after calibration.
8. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
9. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
10. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
11. Perform measurements.
12. Adjust medium parameters in DASY software for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Head 835 MHz) and press 'Option'-button.
13. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 835 MHz).

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>28(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

## 7.0 SAR SAFETY LIMITS

Standards/Guideline	Localized SAR Limit (W/kg) General public (uncontrolled)	Localized SAR Limits (W/kg) Workers (controlled)
ICNIRP (1998) Standard	2.0 (10g)	10.0 (10g)
IEEE C95.1 (1999) Standard	1.6 (1g)	8.0 (1g)


**Table 7.0.1. SAR safety limits for Controlled / Uncontrolled environment**

Human Exposure	Localized SAR Limits (W/kg) 10g, ICNIRP (1998) Standard	Localized SAR Limits (W/kg) 1g, IEEE C95.1 (1999) Standard
Spatial Average (averaged over the whole body)	0.08	0.08
Spatial Peak (averaged over any X g of tissue)	2.00	1.60
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.00	4.00 (10g)

**Table 7.0.2. SAR safety limits**

**Uncontrolled Environments** are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.


**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>		Page <b>29(49)</b>	
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>

## 8.0 DEVICE POSITIONING


### 8.1 Device holder for SAM Twin Phantom

The Device was positioned for all test configurations using the DASY holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

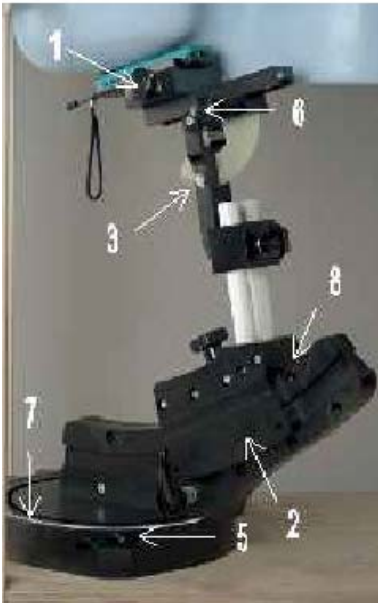

**Figure 8.1.1. Device Holder**

1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the earpiece is in the symmetry plane of the clamp).
2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the earpiece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and backsides, the phone holder angle (3) is 0°.
3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).
4. Shift the phone clamp (6) so that the earpiece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even after changing the phantom or phantom section.
5. Adjust the device position angles to the desired measurement position.

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			Page <b>30(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>

6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking. (The point of contact depends on the design of the device and the positioning angle).

## 8.2 Description of the test positioning

### 8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528- 2003 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

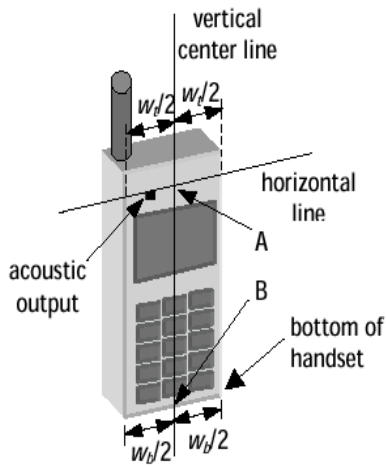


Figure 8.2.1a. Handset vertical and horizontal reference lines – fixed case



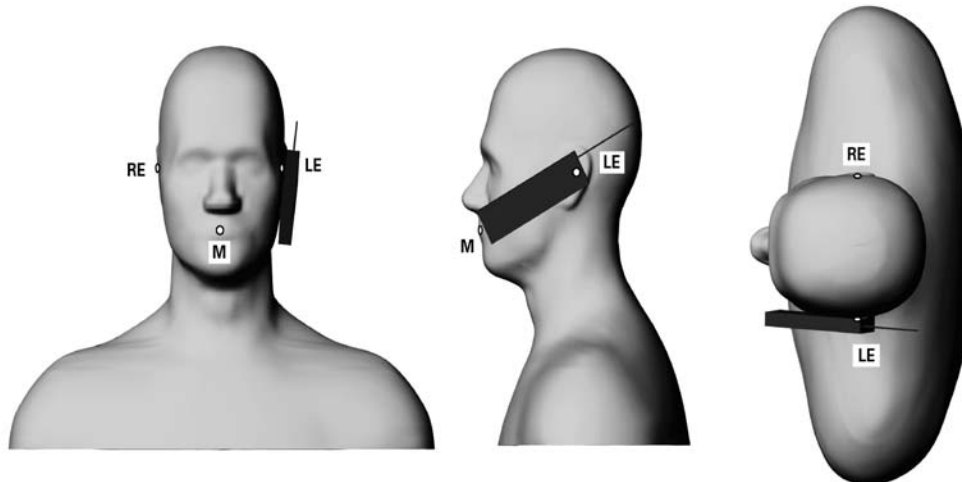


Figure 8.2.1b. Handset vertical and horizontal reference lines – “clam-shell”


	Document		Page	
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>		<b>31(49)</b>	
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Hang Wang</b>	<b>Jan 14 – June 09, 2011</b>	<b>RTS-2605-1102-05A</b>	<b>L6ARDH70CW L6ARDP70UW</b>	<b>2503A-RDH70CW 2503A-RDP70UW</b>

### 8.2.1.1 Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A on Figures 8.2.1a and 8.2.1b), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 8.2.1a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 8.2.1b), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 8.2.1), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB (“mouth-back”) - NF (“neck-front”) including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

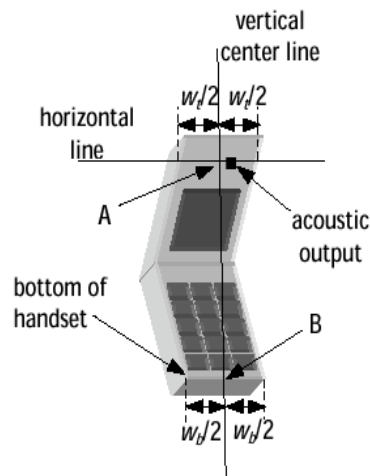


**Figure 8.2.2. Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			Page <b>32(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>

### 8.2.1.2 Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 of 5.4.1 (in this report 8.2.1.1) to replace the device in the “cheek position.”
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

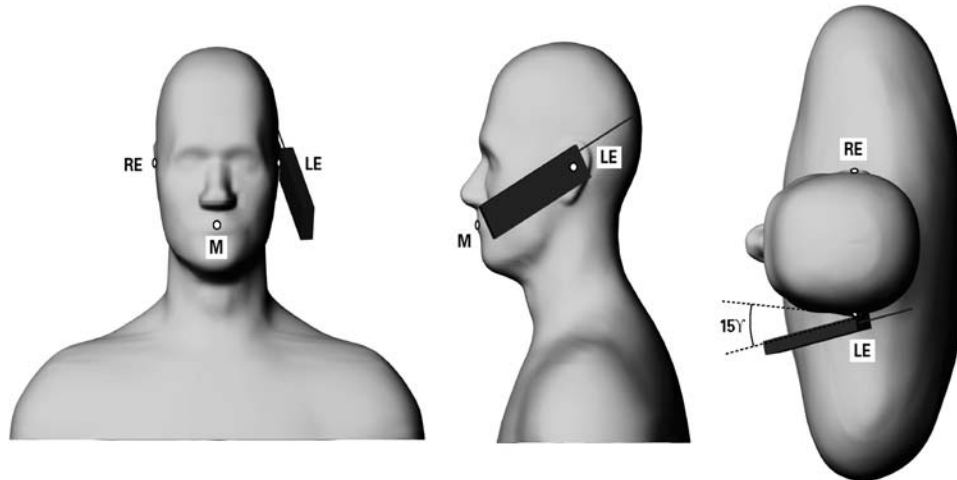


**Figure 8.2.3. Phone position 2, “tilted position.”** The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

### 8.2.2 Body Holster Configuration

Body worn holsters, as shown on Figure 1.4.1, have been test with the device for FCC RF exposure compliance. The EUT was positioned in each holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the device to simulate hands-free operation in a body worn holster configuration.



	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>33(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

## 9.0 HIGH LEVEL EVALUATION

### 9.1 Maximum search

The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

### 9.2 Extrapolation

The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.


### 9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

### 9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are only available for the predefined cube 5x5x7 scan. The routines are verified and optimized for the grid dimensions used in these cube measurements.


The measured volume of 30x30x30mm with 7.5mm resolution in (x,y) and 5mm resolution in z axis amounts to 175 measurement points. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>34(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

## 10.0 MEASUREMENT UNCERTAINTY

<b>DASY4 Uncertainty Budget</b> According to IEEE P1528 [1]								
Error Description	Uncertainty value	Prob. Dist.	Div.	( $c_1$ ) 1g	( $c_2$ ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±4.8%	N	1	1	1	±4.8%	±4.8%	∞
Axial Isotropy	±4.7%	R	√3	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	√3	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Readout Electronics	±1.0%	N	1	1	1	±1.0%	±1.0%	∞
Response Time	±0.8%	R	√3	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF Ambient Conditions	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	√3	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	√3	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	√3	1	1	±2.9%	±2.9%	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±4.0%	R	√3	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	√3	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	√3	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
<b>Combined Std. Uncertainty</b>						±10.3%	±10.0%	330
<b>Expanded STD Uncertainty</b>						±20.6%	±20.1%	

**Table 10.0.1. Worst-Case uncertainty budget for DASY4 assessed according to IEEE P1528.**  
Source: Schmid & Partner Engineering AG.


	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>35(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

<b>DASY5 Uncertainty Budget</b> <b>According to IEEE 1528/2010 and IEC 62209-1/2010</b> <b>(0.3 - 3 GHz range)</b>								
Error Description	Uncert. value	Prob. Dist.	Div.	( $c_i$ ) 1g	( $c_i$ ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±5.5 %	N	1	1	1	±5.5 %	±5.5 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.26	0.26	±0.6 %	±0.7 %	∞
Temp. unc. - Conductivity	±1.7 %	R	$\sqrt{3}$	0.78	0.71	±0.8 %	±0.7 %	∞
Temp. unc. - Permittivity	±0.3 %	R	$\sqrt{3}$	0.23	0.26	±0.0 %	±0.0 %	∞
Combined Std. Uncertainty						±10.6 %	±10.5 %	361
Expanded STD Uncertainty						±21.2 %	±21.1 %	

**Table 10.0.2. Worst-Case uncertainty budget for DASY52 assessed according to IEEE P1528.**

**Source: Schmid & Partner Engineering AG.**

[1] The budget is valid for the frequency range 300MHz - 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>36(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

## 11.0 TEST RESULTS

### 11.1 SAR Measurement results at highest power measured against the head


Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	4-slots GSM/EDGE 850 MHz	824.2					
		836.8	26.9	21.6	0.79	-0.21	0.83
		848.8					
Right Head Cheek	3-slots GSM/EDGE 850 MHz	824.2					
		836.8	28.3	21.6	0.74	-0.05	0.74
		848.8					
Right Head Cheek	2-slots GSM/EDGE 850 MHz	824.2	30.0	21.5	0.72	-0.12	0.72
		836.8	30.0	21.7	0.83	-0.20	0.87
		848.8	29.8	21.5	0.84	-0.04	0.84
Right Head 15° Tilt	2-slots GSM/EDGE 850 MHz	824.2					
		836.8	30.0	21.6	0.43	-0.09	0.43
		848.8					
Right Head Cheek	1-slot GSM 850 MHz	824.2					
		836.8	32.7	21.6	0.74	-0.41	0.81
		848.8					
Left Head Cheek	4-slots GSM/EDGE 850 MHz	824.2					
		836.8	26.9	21.4	0.68	0.05	0.68
		848.8					
Left Head Cheek	3-slots GSM/EDGE 850 MHz	824.2					
		836.8	28.3	21.4	0.74	-0.54	0.84
		848.8					
Left Head Cheek	2-slots GSM/EDGE 850 MHz	824.2					
		836.8	30.0	21.4	0.75	-0.12	0.75
		848.8					
Left Head 15° Tilt	2-slots GSM/EDGE 850 MHz	824.2					
		836.8	30.0	21.5	0.40	0.08	0.40
		848.8					
Left Head Cheek	1-slot GSM 850 MHz	824.2					
		836.8	32.7	21.4	0.68	-0.31	0.73
		848.8					

**Table 11.1.1. SAR results for GSM/EDGE 850 head configuration**

\* Note: If the power drift is  $\leq -0.200$  dB, the extrapolated SAR is calculated using the formula:


$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

\*Only Middle channel was tested when 1g Average SAR <0.8 W/Kg or 3dB lower than the limit.

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>37(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>


Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	CDMA 800 MHz	824.70					
		836.52	24.1	22.1	0.68	-0.40	0.75
		848.52					
Right Head 15° Tilt	CDMA 800 MHz	824.70					
		836.52	24.1	22.0	0.37	0.08	0.37
		848.52					
Left Head Cheek	CDMA 800 MHz	824.70					
		836.52	24.1	22.0	0.62	-0.18	0.62
		848.52					
Left Head 15° Tilt	CDMA 800 MHz	824.70					
		836.52	24.1	22.0	0.34	-0.02	0.34
		848.52					
Right Head Cheek	CDMA 1900 MHz	1851.25	23.9	22.1	0.90	-0.15	0.90
		1880.00	23.8	22.3	0.82	-0.18	0.82
		1908.50	23.8	22.0	0.88	-0.12	0.88
Right Head 15° Tilt	CDMA 1900 MHz	1851.25					
		1880.00	23.8	22.1	0.28	-0.02	0.28
		1908.50					
Left Head Cheek	CDMA 1900 MHz	1851.25					
		1880.00	23.8	21.9	0.36	-0.17	0.36
		1908.50					
Left Head 15° Tilt	CDMA 1900 MHz	1851.25					
		1880.00	23.8	21.8	0.27	0.15	0.27
		1908.50					

**Table 11.1.2. SAR results for CDMA 800/1900 for head configuration**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>38(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	4-slots GSM/EDGE 1900 MHz	1850.2	23.4	21.9	0.75	0.21	0.75
		1880.0					
		1909.8					
Right Head Cheek	3-slots GSM/EDGE 1900 MHz	1850.2	24.5	22.1	0.71	-0.15	0.71
		1880.0					
		1909.8					
Right Head Cheek	2-slots GSM/EDGE 1900 MHz	1850.2	26.1	21.9	0.72	0.25	0.72
		1880.0	26.2	22.0	0.65	-0.06	0.65
		1909.8	26.2	22.0	0.65	-0.16	0.65
Right Head 15° Tilt	2-slots GSM/EDGE 1900 MHz	1850.2	26.1	21.9	0.16	0.06	0.16
		1880.0					
		1909.8					
Right Head Cheek	1-slot GSM 1900 MHz	1850.2	28.8	21.8	0.64	-0.13	0.64
		1880.0					
		1909.8					
Left Head Cheek	4-slots GSM/EDGE 1900 MHz	1850.2					
		1880.0					
		1909.8	23.2	21.6	0.30	-0.05	0.30
Left Head Cheek	3-slots GSM/EDGE 1900 MHz	1850.2					
		1880.0					
		1909.8	24.3	21.7	0.29	-0.10	0.29
Left Head Cheek	2-slots GSM/EDGE 1900 MHz	1850.2	26.1	22.1	0.28	-0.18	0.28
		1880.0	26.2	22.2	0.26	0.22	0.26
		1909.8	26.2	22.2	0.29	-0.50	0.33
Left Head 15° Tilt	2-slots GSM/EDGE 1900 MHz	1850.2					
		1880.0	26.2	21.7	0.15	0.13	0.15
		1909.8					
Left Head Cheek	1-slot GSM 1900 MHz	1850.2					
		1880.0					
		1909.8	28.7	21.9	0.25	0.17	0.25


**Table 11.1.3. SAR results for GSM/EDGE 1900 head configuration**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>39(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	802.11 b 2450 MHz	2412					
		2437					
		2462	18.4	22.4	0.19	0.89	0.19
Right Head 15° Tilt	802.11 b 2450 MHz	2412					
		2437					
		2462	18.4	22.2	0.24	-0.21	0.25
Left Head Cheek	802.11 b 2450 MHz	2412					
		2437					
		2462	18.4	22.5	0.29	-0.09	0.29
Left Head 15° Tilt	802.11 b 2450 MHz	2412					
		2437					
		2462	18.4	22.4	0.39	-0.12	0.39

**Table 11.1.4. Head SAR results for WiFi/WLAN/802.11b**

\*Note: Tested only highest output power channel


	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>40(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

**Head SAR Measurement Results for RDP71UW**

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD V 850 MHz	826.4					
		836.4	24.3	21.8	0.57	-0.08	0.57
		846.6					
Right Head 15° Tilt	WCDMA FDD V 850 MHz	826.4					
		836.4	24.3	21.9	0.29	0.03	0.29
		846.6					
Left Head Cheek	WCDMA FDD V 850 MHz	826.4					
		836.4	24.3	22.2	0.46	0.37	0.66
		846.6					
Left Head 15° Tilt	WCDMA FDD V 850 MHz	826.4					
		836.4	24.3	22.0	0.27	0.17	0.27
		846.6					

**Table 11.1.5. RDP71UW Rev 1 SAR results for WCDMA band V head configuration**




	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>41(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD V 850 MHz	826.4	24.3	21.8	0.75	0.04	0.75
		836.4	24.3	21.8	0.84	0.16	0.84
		846.6	24.1	21.9	0.84	0.23	0.84
Left Head Cheek	WCDMA FDD V 850 MHz	826.4	24.3	22.0	0.69	0.02	0.69
		836.4	24.3	21.9	0.82	-0.13	0.82
		846.6	24.1	22.0	0.80	-0.03	0.80

**Table 11.1.6. RDP71UW Rev 2 SAR results for WCDMA band V head configuration**


Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD II 1900 MHz	1852.4	23.3	22.0	0.99	0.08	0.99
		1880	23.6	21.8	1.07	0.16	1.07
		1907.6	23.2	22.0	1.12	-0.06	<b>1.12</b>
Right Head 15° Tilt	WCDMA FDD II 1900 MHz	1852.4					
		1880	23.6	21.9	0.38	0.02	0.38
		1907.6					
Left Head Cheek	WCDMA FDD II 1900 MHz	1852.4					
		1880	23.6	22.1	0.44	-0.15	0.44
		1907.6					
Left Head 15° Tilt	WCDMA FDD II 1900 MHz	1852.4					
		1880	23.6	22.1	0.36	0.15	0.36
		1907.6					

**Table 11.1.7. RDP71UW Rev 1 SAR results for WCDMA band II head configuration**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>42(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD II 1900 MHz	1852.4					
		1880					
		1907.6	23.2	22.1	0.74	-0.13	0.74
Left Head Cheek	WCDMA FDD II 1900 MHz	1852.4					
		1880					
		1907.6	23.2	22.1	0.37	-0.04	0.37

**Table 11.1.8. RDP71UW Rev 2 SAR results for WCDMA band II head configuration**

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>43(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>

## 11.2 SAR measurement results at highest power measured against the body using accessories


Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS 850 MHz	836.8	30.1	Vertical Holster, back side facing phantom	22.6	0.59	-0.36	0.64
	836.8	30.1	Vertical Holster, front side facing phantom	22.2	0.41	-0.10	0.41
	836.8	30.1	25mm Spacer, back side facing phantom	22.1	0.34	-0.40	0.37
	836.8	30.1	Vertical Holster, HS, back side facing phantom	22.4	0.44	-0.23	0.46
3-slots GPRS 850 MHz	836.8	28.3	Vertical Holster, back side facing phantom	22.1	0.51	0.08	0.51
4-slots GPRS 850 MHz	836.8	27.0	Vertical Holster, back side facing phantom	22.0	0.49	0.11	0.49

**Table 11.2.1. SAR results for GPRS850 body-worn configurations**

\* Note: If the power drift is  $\leq -0.200$  dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

\*Only Middle channel was tested when 1g Average SAR <0.8 W/Kg or 3dB lower than the limit.


	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>44(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
CDMA 800 MHz	836.5	24.1	Vertical Holster, back side facing phantom	22.1	0.62	0.16	0.62
	836.5	24.1	Vertical Holster, front side facing phantom	22.5	0.50	0.06	0.50
	836.5	24.1	Vertical Holster, headset, back side facing phantom	22.4	0.46	0.06	0.46
	836.5	24.1	25mm Spacer, back side facing phantom	22.3	0.41	0.18	0.41
CDMA 1900 MHz	1880.0	23.8	Vertical Holster, back side facing phantom	21.8	0.63	0.17	0.63
	1880.0	23.8	Vertical Holster, front side facing phantom	22.7	0.22	-0.05	0.22
	1880.0	23.8	Vertical Holster, headset, back side facing phantom	22.5	0.66	-0.08	0.66
	1880.0	23.8	25mm Spacer, back side facing phantom	22.5	0.30	-0.05	0.30

**Table 11.2.2. SAR results for CDMA 800/1900 body-worn configurations**

Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-Slots GPRS 1900 MHz	1880.0	26.1	Vertical Holster, back side facing phantom	22.5	0.35	-0.08	0.35
	1880.0	26.1	Vertical Holster, front side facing phantom	22.2	0.11	0.08	0.11
	1880.0	26.1	Vertical Holster, headset, back side facing phantom	22.3	0.35	0.09	0.35
	1880.0	26.1	25mm Spacer, back side facing phantom	22.4	0.17	0.21	0.17
3-Slots GPRS 1900 MHz	1880.0	24.4	Vertical Holster, back side facing phantom	22.2	0.17	-0.05	0.17
4-Slots GPRS 1900 MHz	1880.0	23.3	Vertical Holster, back side facing phantom	22.0	0.17	-0.12	0.17


**Table 11.2.3. SAR results for GPRS 1900 body-worn configurations**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			Page <b>45(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW</b> <b>L6ARDP70UW</b>

Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
802.11b/ WLAN 2450 MHz	2462	18.4	Vertical Holster, back side facing phantom	22.6	0.02	-0.28	0.02
	2462	18.4	Vertical Holster, front side facing phantom	22.6	0.01	0.25	0.01
	2462	18.4	25mm Spacer, back side facing phantom	22.2	0.08	-0.51	0.09
	2462	18.4	25mm Spacer, HS, back side facing phantom	22.2	0.06	2.04	0.06

**Table 11.2.4: SAR results for WiFi/WLAN/802.11b body-worn configurations**

\*Note: Tested only highest output power channel

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>46(49)</b>
Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW L6ARDP70UW</b>	IC ID <b>2503A-RDH70CW 2503A-RDP70UW</b>


**Body SAR Measurement Results for RDP71UW**

Mode	f (MHz)	Cond. Output Power (dBm)	Holster / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD V 850 MHz	836.4	24.3	Vertical Holster, back side facing	22.0	0.47	-0.04	0.47
	836.4	24.3	Vertical Holster, HS#1, back side facing	21.9	0.42	0.05	0.42

**Table 11.2.5. RDP71UW Rev 1 SAR results for WCDMA band V body-worn configurations**


Mode	f (MHz)	Cond. Output Power (dBm)	Holster / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD V 850 MHz	836.4	24.3	Vertical Holster, back side facing	22.1	0.69	-0.04	0.69
	836.4	24.3	Vertical Holster, front side facing	22.4	0.61	0.29	0.61
	836.4	24.3	25mm Spacer, back side facing phantom	22.5	0.48	0.19	0.48
	836.4	24.3	Vertical Holster, headset, back side facing	22.5	0.49	-0.03	0.49

**Table 11.2.6. RDP71UW Rev 2 SAR results for WCDMA band V body-worn configurations**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>47(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

Mode	f (MHz)	Cond. Output Power (dBm)	Holster / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD II 1900MHz	1852.4	23.3	Vertical Holster, back side facing phantom	22.4	0.66	-0.05	0.66
	1880.0	23.6	Vertical Holster, back side facing phantom	22.4	0.82	0.01	0.82
	1907.6	23.2	Vertical Holster, back side facing phantom	22.2	0.55	0.08	0.55
	1880.0	23.6	Vertical Holster, front side facing phantom	22.3	0.24	0.10	0.24
	1880.0	23.6	Vertical Holster, headset, back side facing phantom	22.4	0.86	-0.10	<b>0.86</b>
	1880.0	23.6	25mm Spacer, back side facing phantom	22.0	0.32	0.10	0.32


**Table 11.2.7. RDP71UW Rev 2 SAR results for WCDMA band II body-worn configurations**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone  Model RDH71CW/RDP71UW</b>			Page <b>48(49)</b>
	Author Data <b>Hang Wang</b>	Dates of Test <b>Jan 14 – June 09, 2011</b>	Test Report No <b>RTS-2605-1102-05A</b>	FCC ID: <b>L6ARDH70CW  L6ARDP70UW</b>

## 12.0 REFERENCES

- [1] IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [2] EN 50360: 2001, Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
- [3] ICNIRP, International Commission on Non-Ionizing Radiation Protection (2009), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).
- [4] Council Recommendation 1999/519/EC of July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)
- [5] IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- [6] IEEE C95.1-2005, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- [7] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
- [8] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.
- [9] DASY 4 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL V4.7 Schmid & Partner Engineering AG, June 2006 which follows draft IEC 62209 – Part 2.
- [10] Health Canada, Safety Code 6, 2009: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency range from 3 kHz to 300 GHz.
- [11] RSS-102, issue 4-2010: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada’s Safety Code 6 for Exposure of Humans to Radio Frequency Fields.
- [12] IEC 62209-1, First Edition-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- [13] FCC OET SAR Measurement Requirements for 3 – 6 GHz, October, 2006.
- [14] FCC OET SAR Measurement Procedures for 802.11 a/b/g Transmitters, May, 2007.
- [15] FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters & Antennas, September, 2008.



	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RDH71CW/RDP71UW</b>			<b>49(49)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Hang Wang</b>	<b>Jan 14 – June 09, 2011</b>	<b>RTS-2605-1102-05A</b>	<b>L6ARDH70CW L6ARDP70UW</b>	<b>2503A-RDH70CW 2503A-RDP70UW</b>

[16] FCC OET SAR Test Reduction Procedure for GSM/GPRS/EDGE, December, 2008.

[17] FCC OET SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz – 3 GHz, January, 2007.

[18] FCC OET RF Exposure Procedures for Mobile and Portable Devices, and Equipment Authorization Policies, November, 2009.

[19] FCC OET SAR Measurements Procedures for 3G Devices, October, 2007.

[20] Dipole Requirements for SAR System Validation and Verification, Novmeber, 2009.

[21] IEC 62209-2, Edition 1.0-2010: Human exposure to radio frequency fields from hand-held and body-mount wireless communication devices – Human Models, instrumentation, and procedures - part 2 - procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).