
	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 1(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 2(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/10/2011 3:40:50 PM, Date/Time: 5/10/2011 3:46:11 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE835_low_chan_amb_temp_22..8_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Communication

System PAR: 6.232 dB

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.912 \text{ mho/m}$; $\epsilon_r = 42.389$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.917 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.960 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.092 W/kg

SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.605 mW/g

Maximum value of SAR (measured) = 0.877 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

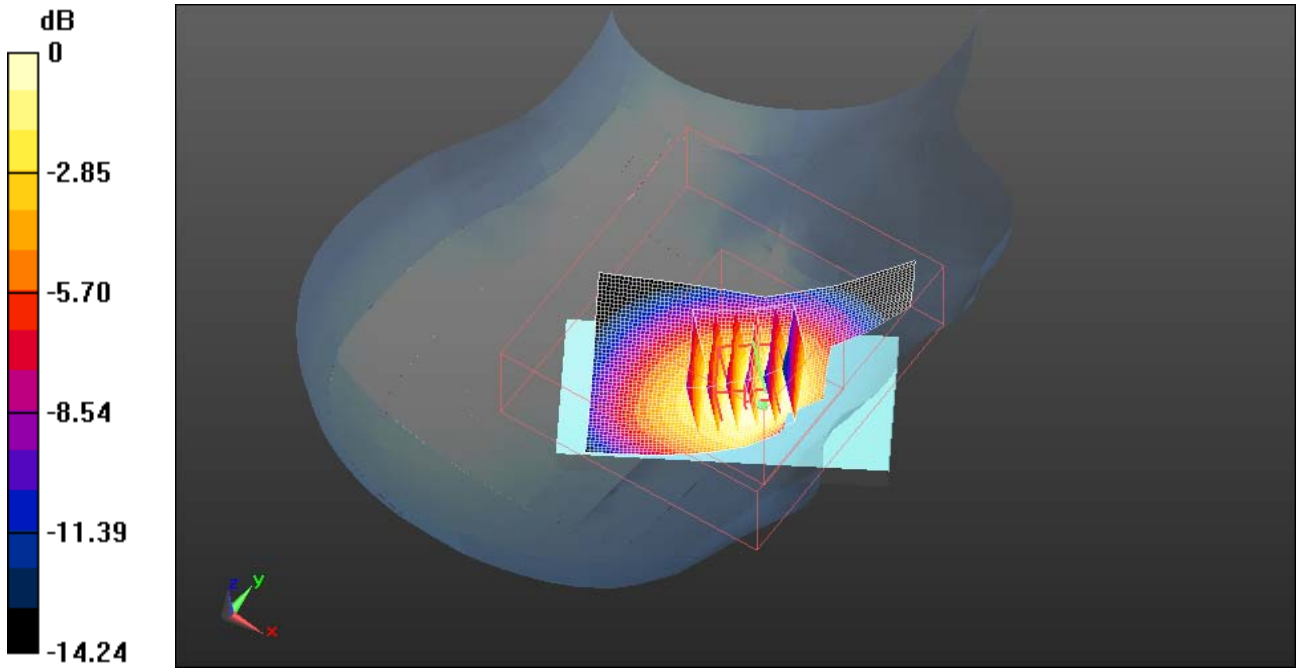

0 dB = 0.880mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 4(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/10/2011 3:19:46 PM, Date/Time: 5/10/2011 3:25:07 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE835_mid_chan_amb_temp_23.0_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 42.256$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.313 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.741 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.617 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.871 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.253 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 5(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

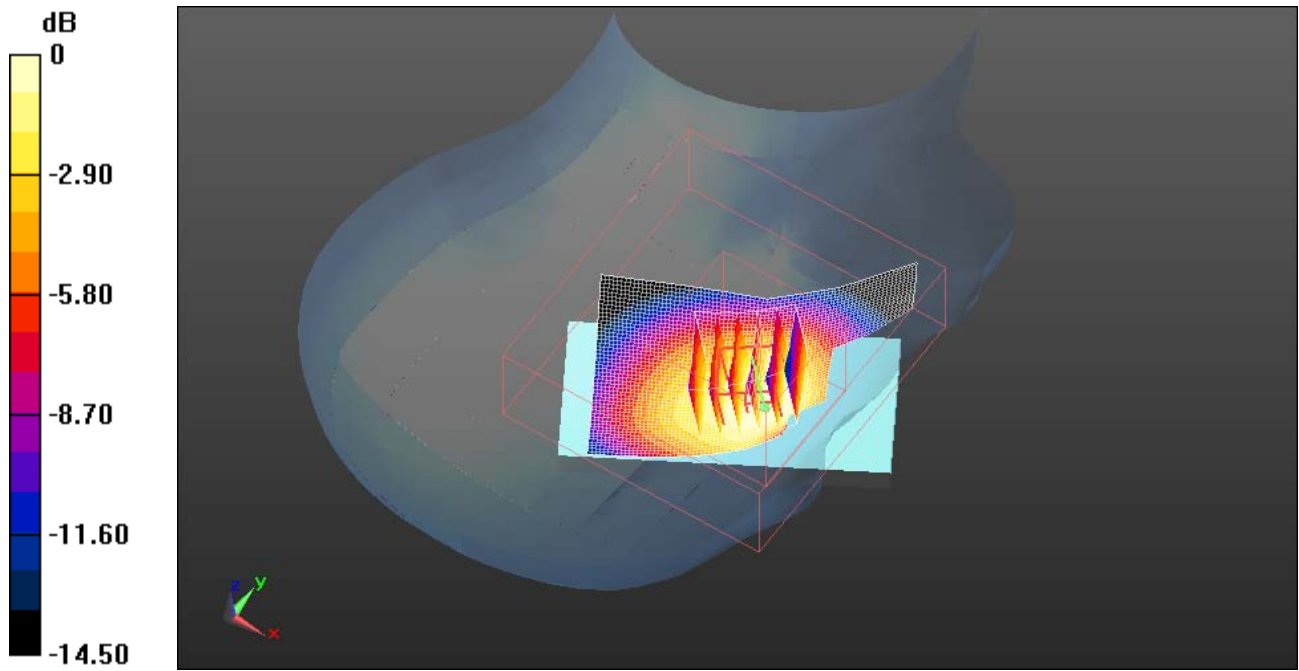

0 dB = 1.250mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 6(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/10/2011 5:06:36 PM, Date/Time: 5/10/2011 5:11:51 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_EDGE835_mid_chan_amb_temp_23.0_liq_temp_22
.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 42.256$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.747 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.616 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.511 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.715 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

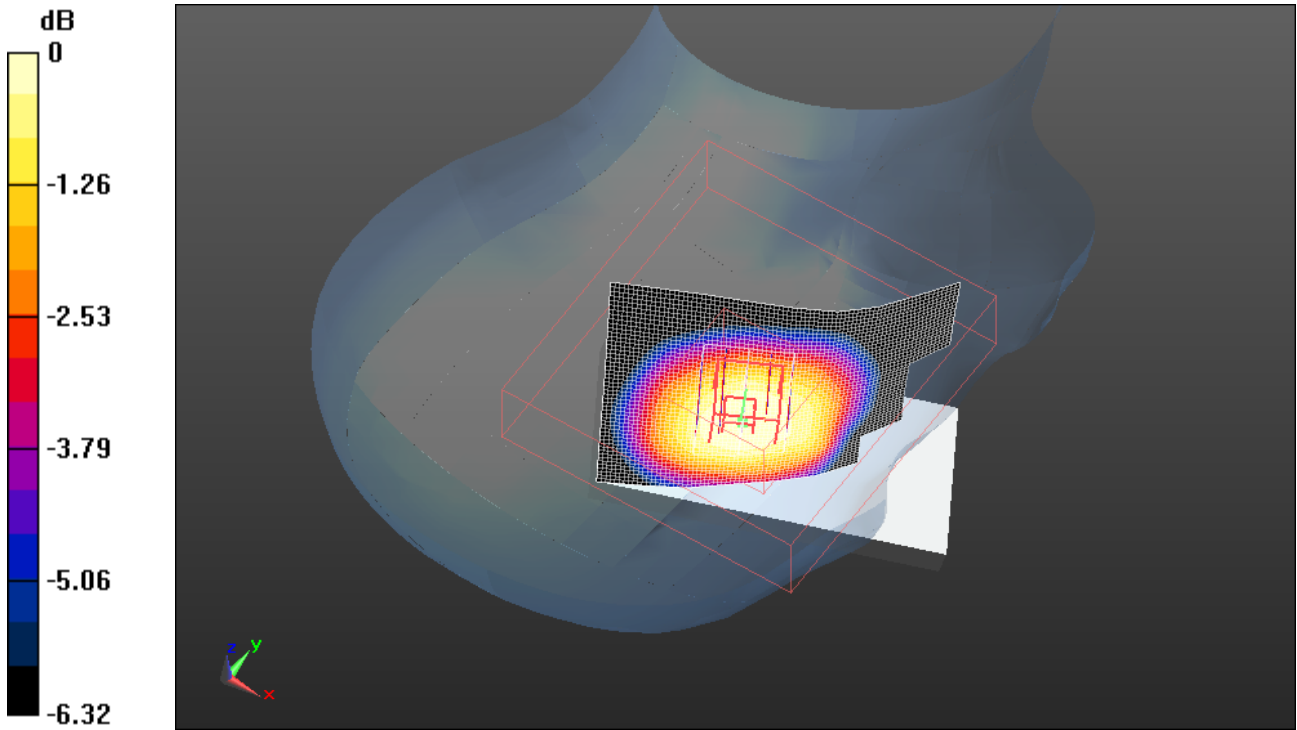

0 dB = 0.720mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 8(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/10/2011 5:36:28 PM, Date/Time: 5/10/2011 5:42:48 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_low_chan_amb_temp_23.3_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 825$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.389$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.048 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 10.209 V/m; Power Drift = -0.0051 dB

Peak SAR (extrapolated) = 1.419 W/kg

SAR(1 g) = 0.935 mW/g; SAR(10 g) = 0.624 mW/g

Maximum value of SAR (measured) = 1.014 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

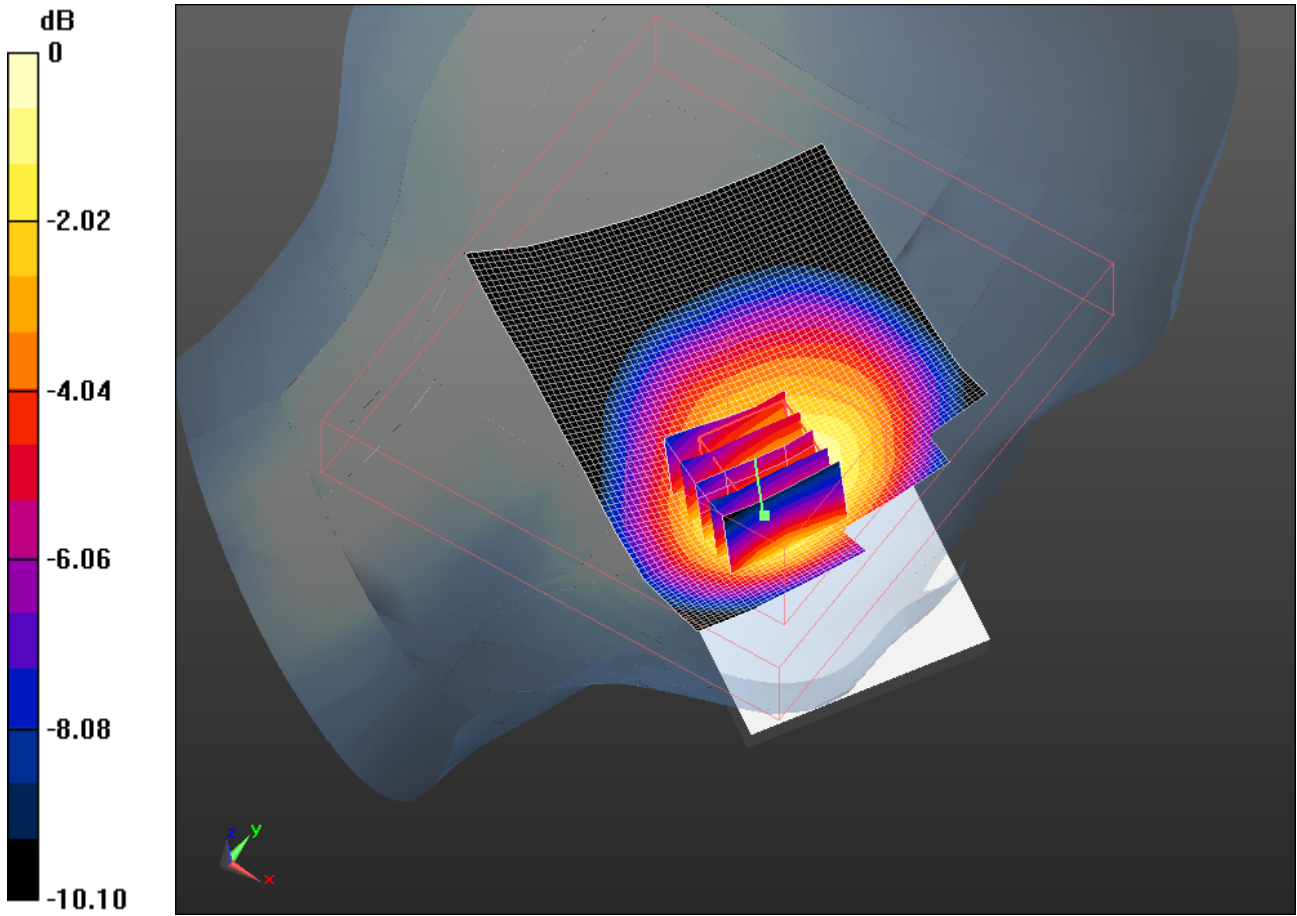

0 dB = 1.010mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 10(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/10/2011 5:22:17 PM, Date/Time: 5/10/2011 5:28:36 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_mid_chan_amb_temp_23.9_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 42.256$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.374 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.524 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.836 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.818 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.331 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

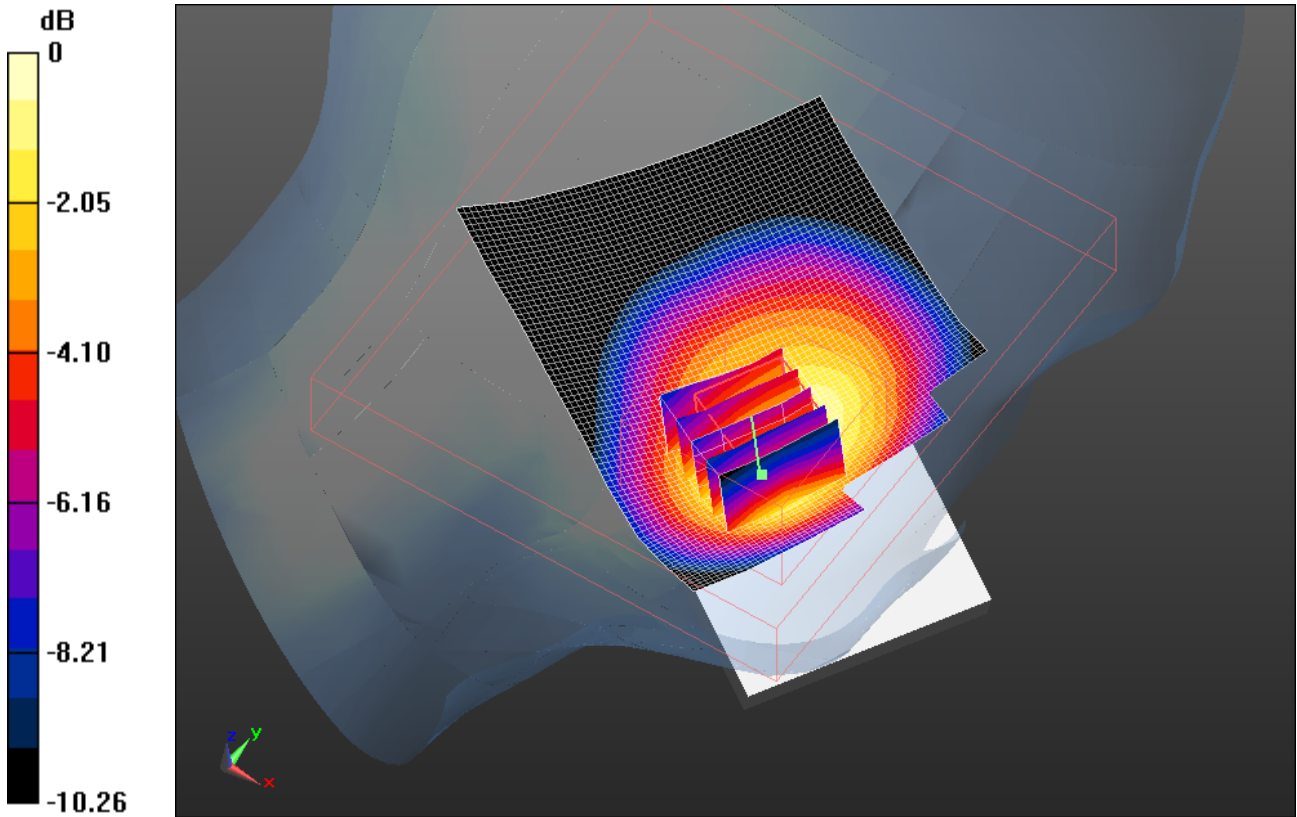

0 dB = 1.330mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 12(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/10/2011 6:20:54 PM, Date/Time: 5/10/2011 6:26:49 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM850_mid_chan_amb_temp_23.3_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 42.258$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.096 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.616 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.611 W/kg
SAR(1 g) = 0.988 mW/g; SAR(10 g) = 0.642 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.061 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

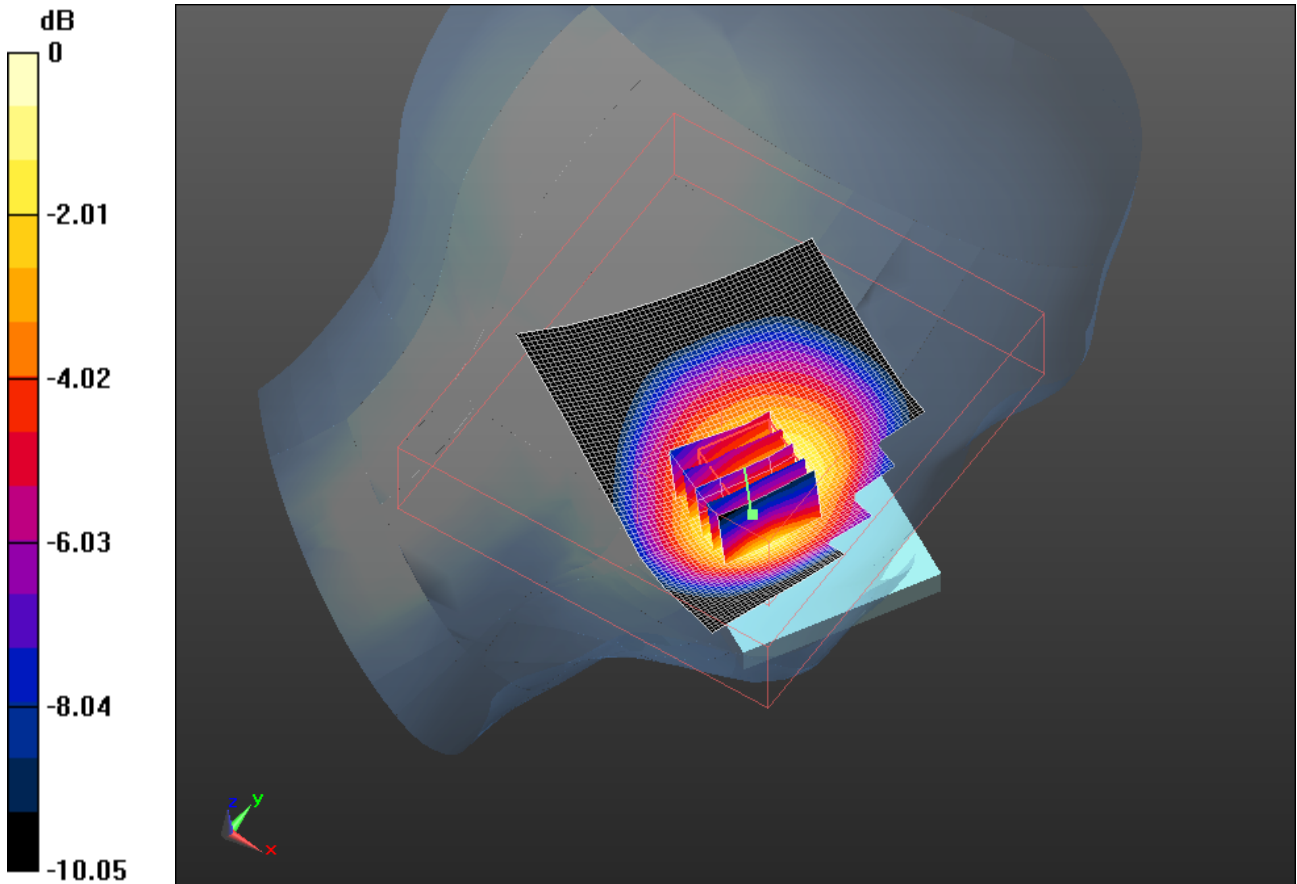

0 dB = 1.060mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 14(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/10/2011 6:07:12 PM, Date/Time: 5/10/2011 6:13:31 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE850_mid_chan_amb_temp_23.3_liq_temp_22.3

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 42.09$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.11, 6.11, 6.11); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.749 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.991 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.534 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.737 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

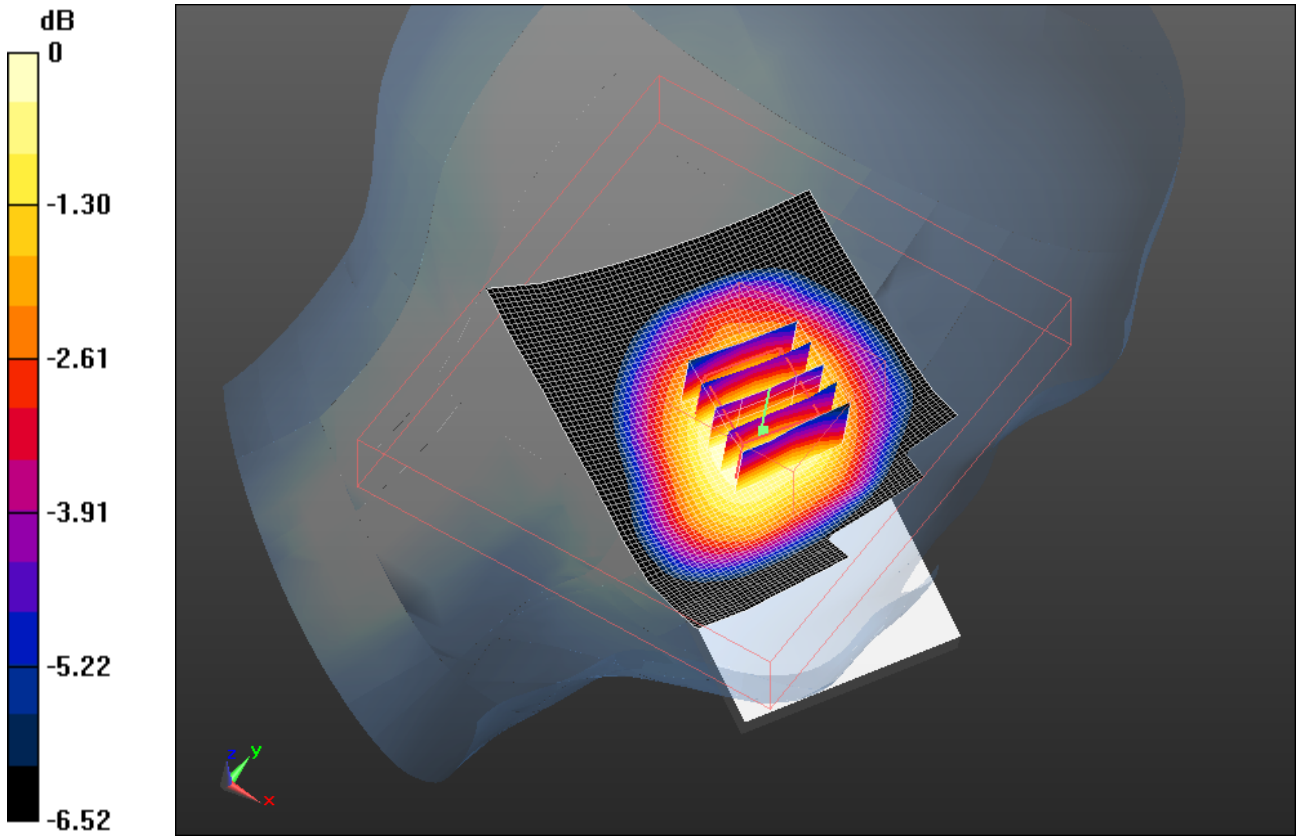

0 dB = 0.740mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 16(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 6/7/2011 11:20:02 PM, Date/Time: 6/7/2011 11:25:29 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_high_chan_amb_temp_23.0_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51

Communication System: EDGE 850 (2slots); Communication System Band: EDGE 850;
Frequency: 848.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 39.971$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.222 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.827 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.497 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.817 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.189 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

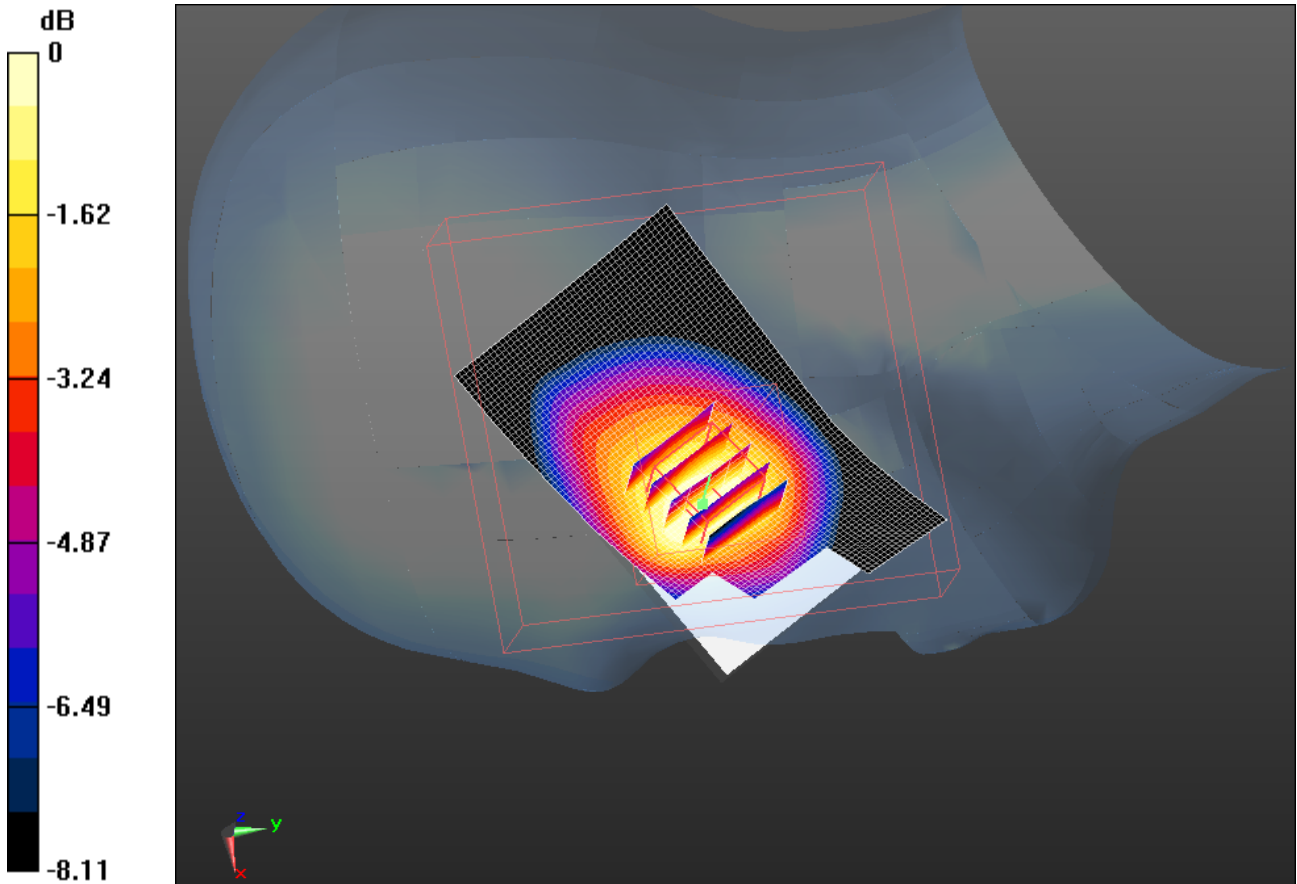

0 dB = 1.190mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 18(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 6/7/2011 11:02:44 PM, Date/Time: 6/7/2011 11:08:00 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_high_chan_amb_temp_23.2_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51

Communication System: EDGE 850 (2slots); Communication System Band: EDGE 850;
Frequency: 848.8 MHz; Communication System PAR: 6.232 dB
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 39.971$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.312 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.643 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.806 W/kg
SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.817 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.269 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

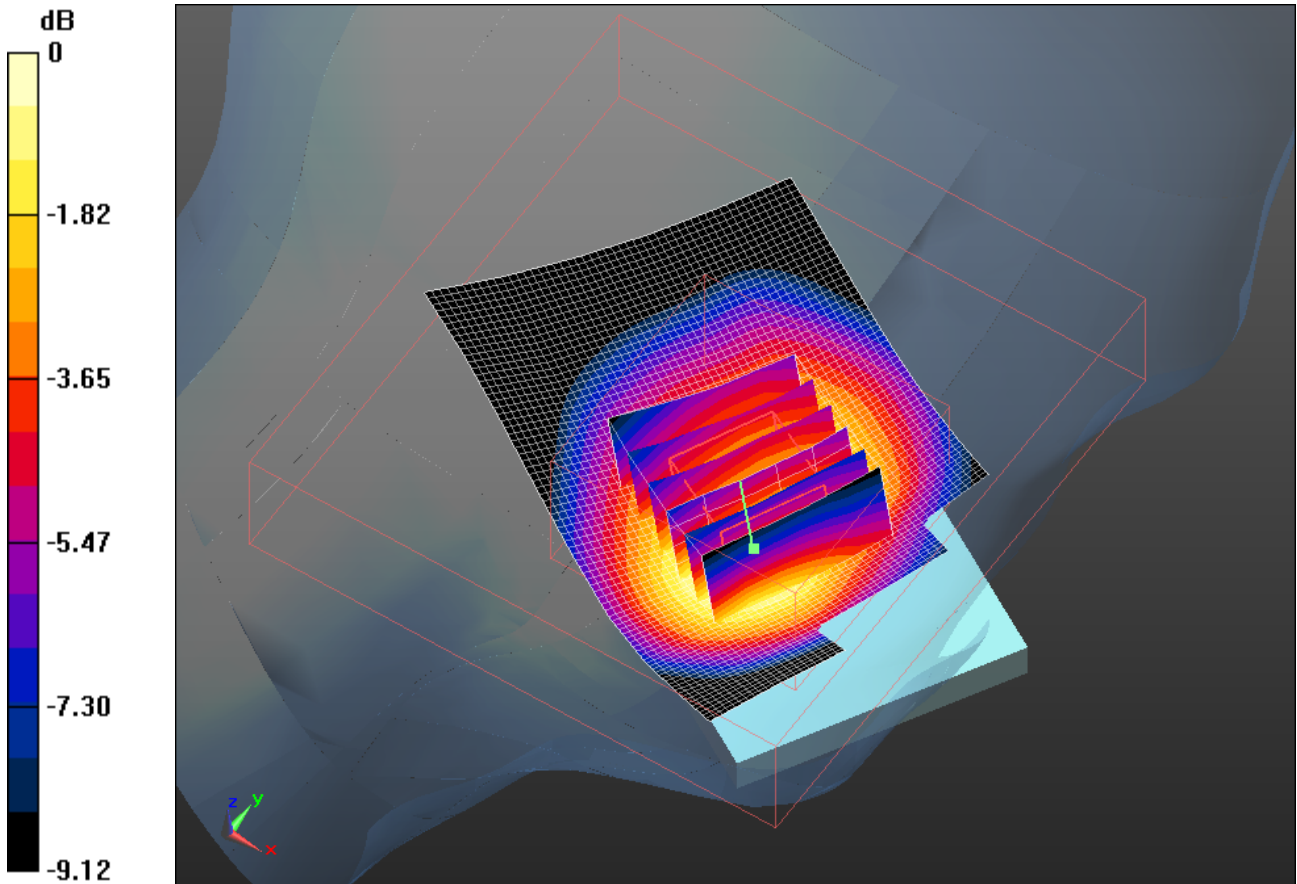

0 dB = 1.270mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 20(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/6/2011 10:21:03 AM, Date/Time: 5/6/2011 10:26:45 AM, Date/Time: 5/6/2011 10:33:55 AM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_low_chan_amb_temp_23.1_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 38.629$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.977 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.694 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.386 W/kg

SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.524 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.919 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 21(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW


Configuration/Touch position -/Zoom Scan (5x5x7) 2 (7x6x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.694 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.396 W/kg
SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.528 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

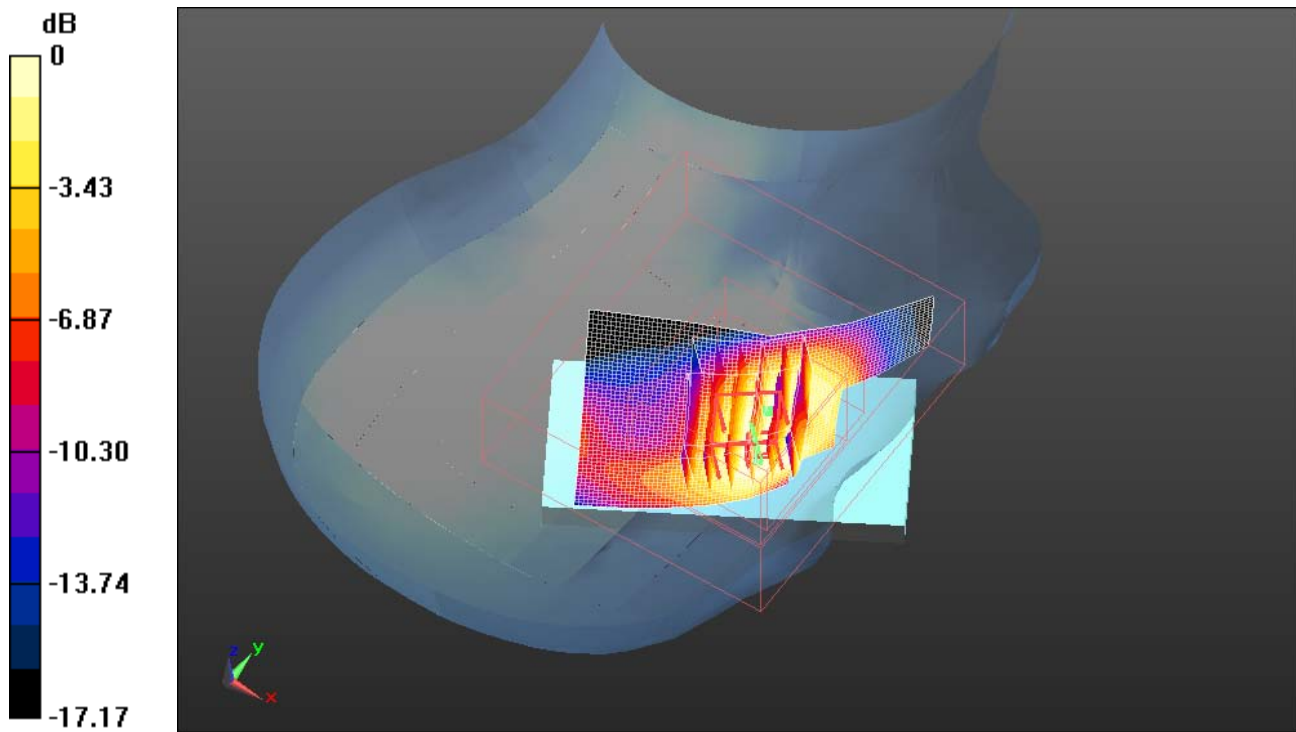

0 dB = 0.920mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 22(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/6/2011 9:52:37 AM, Date/Time: 5/6/2011 9:57:57 AM, Date/Time: 5/6/2011 10:06:47 AM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_mid_chan_amb_temp_23.0_liq_temp_22.0

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 1900; Frequency: 1880 MHz; Communication System PAR: 6.232 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.329$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.882 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.551 V/m; Power Drift = 0.22 dB

Peak SAR (extrapolated) = 1.321 W/kg


SAR(1 g) = 0.827 mW/g; SAR(10 g) = 0.501 mW/g

Maximum value of SAR (measured) = 0.880 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) 2 (7x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.551 V/m; Power Drift = 0.16 dB

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 23(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Peak SAR (extrapolated) = 1.283 W/kg
SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.497 mW/g
Maximum value of SAR (measured) = 0.862 mW/g

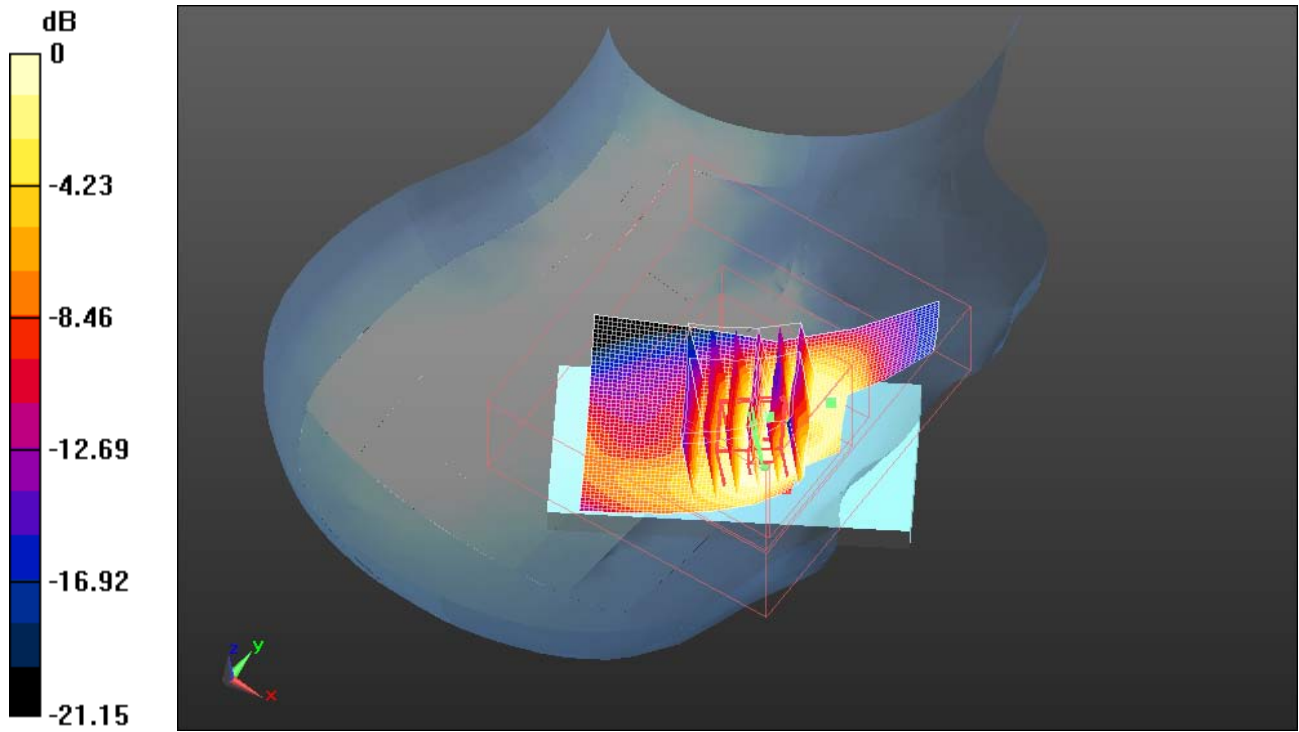

0 dB = 0.860mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 24(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/6/2011 10:44:26 AM, Date/Time: 5/6/2011 10:52:30 AM, Date/Time:
5/6/2011 10:59:49 AM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_high_chan_amb_temp_23.2_liq_temp_22.2

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Communication System
PAR: 6.232 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.356$ mho/m; $\epsilon_r = 38.402$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.805 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.443 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.153 W/kg


SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.778 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) 2 (7x6x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.443 V/m; Power Drift = 0.06 dB

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 25(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Peak SAR (extrapolated) = 1.158 W/kg
 SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.442 mW/g
 Maximum value of SAR (measured) = 0.767 mW/g

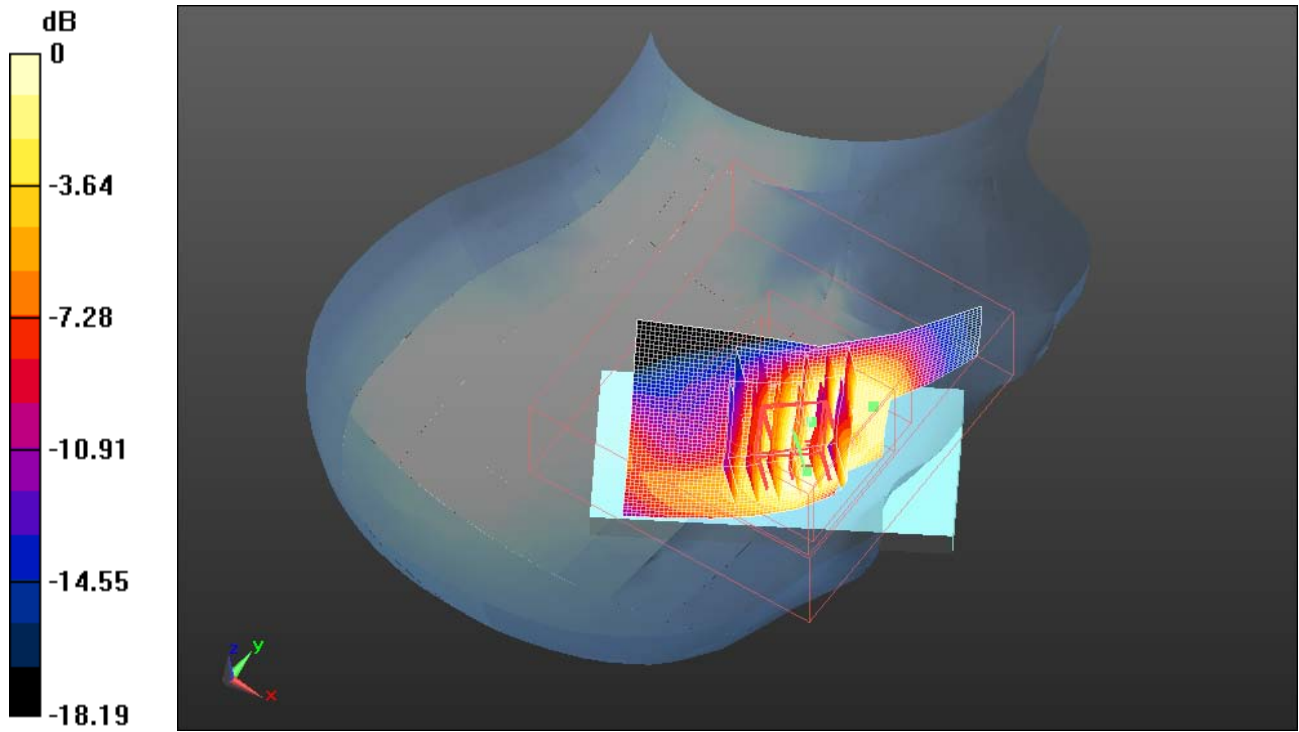

0 dB = 0.770mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 26(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/3/2011 10:57:47 AM, Date/Time: 5/3/2011 11:07:56 AM, Date/Time: 5/3/2011 11:14:44 AM

Test Laboratory: RIM Testing Services

RightHandSide_GSM1900_mid_chan_amb_temp_23.0_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.335$ mho/m; $\epsilon_r = 38.14$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.631 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.470 V/m; Power Drift = -0.32 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.349 mW/g


Maximum value of SAR (measured) = 0.605 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x7x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.470 V/m; Power Drift = -0.54 dB


Peak SAR (extrapolated) = 0.860 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 27(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.356 mW/g
Maximum value of SAR (measured) = 0.613 mW/g

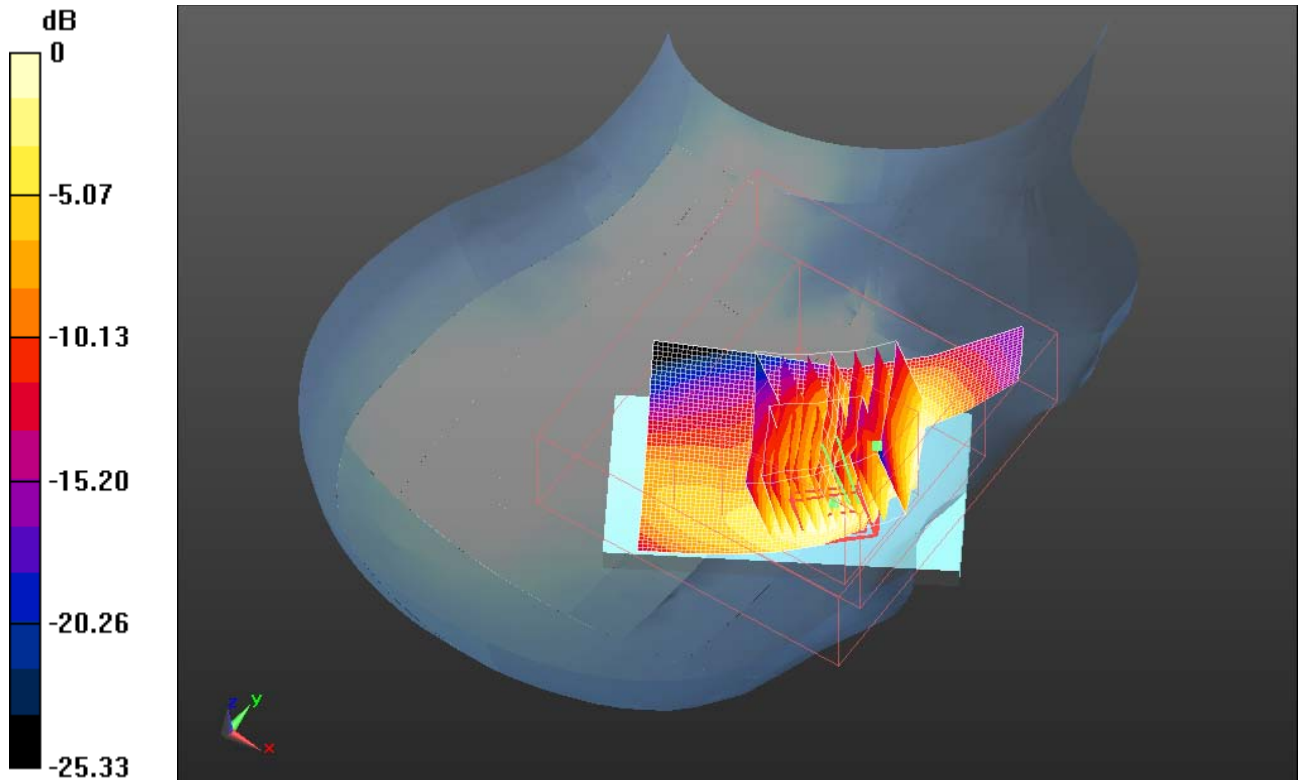

0 dB = 0.610mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 28(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/3/2011 11:31:47 AM, Date/Time: 5/3/2011 11:37:26 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_GSM1900_mid_chan_amb_temp_23.1_liq_temp_22 .1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.335$ mho/m; $\epsilon_r = 38.14$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.335 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.377 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.317 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

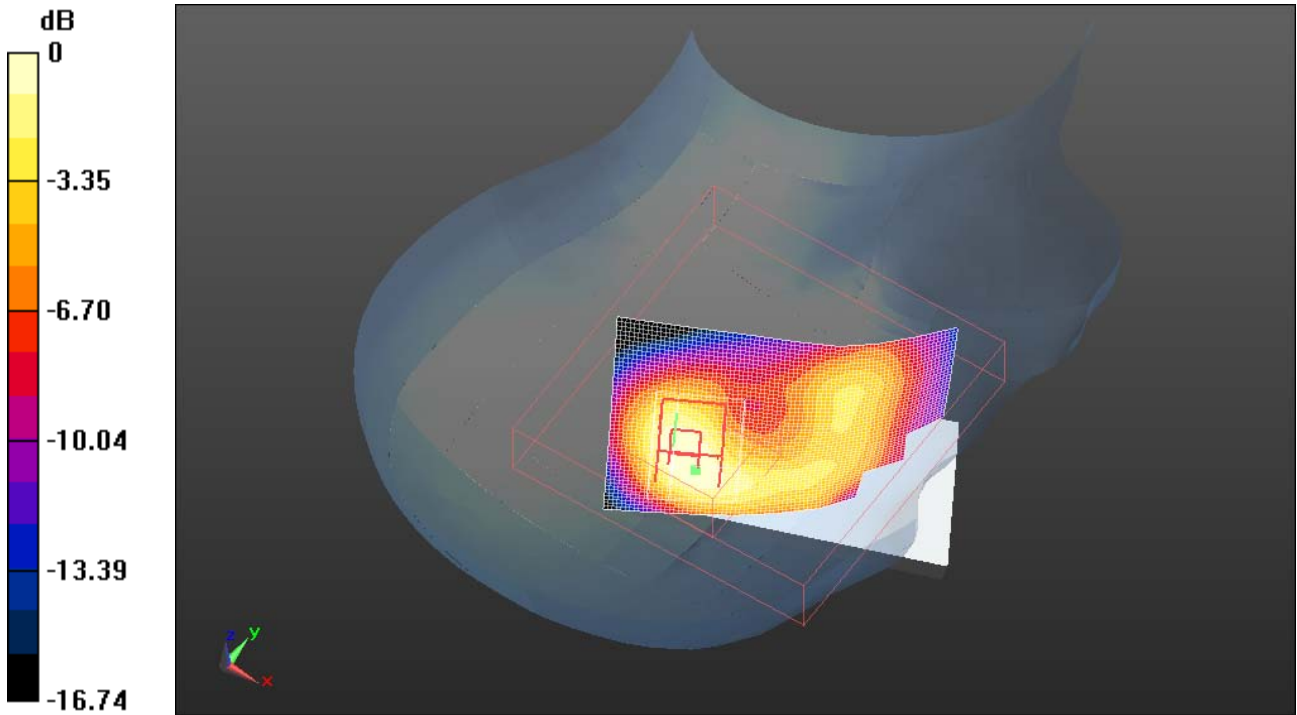

0 dB = 0.320mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 30(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/6/2011 11:11:53 AM, Date/Time: 5/6/2011 11:16:56 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_low_chan_amb_temp_23.3_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 38.629$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.001 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.252 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.432 W/kg

SAR(1 g) = 0.906 mW/g; SAR(10 g) = 0.523 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.966 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

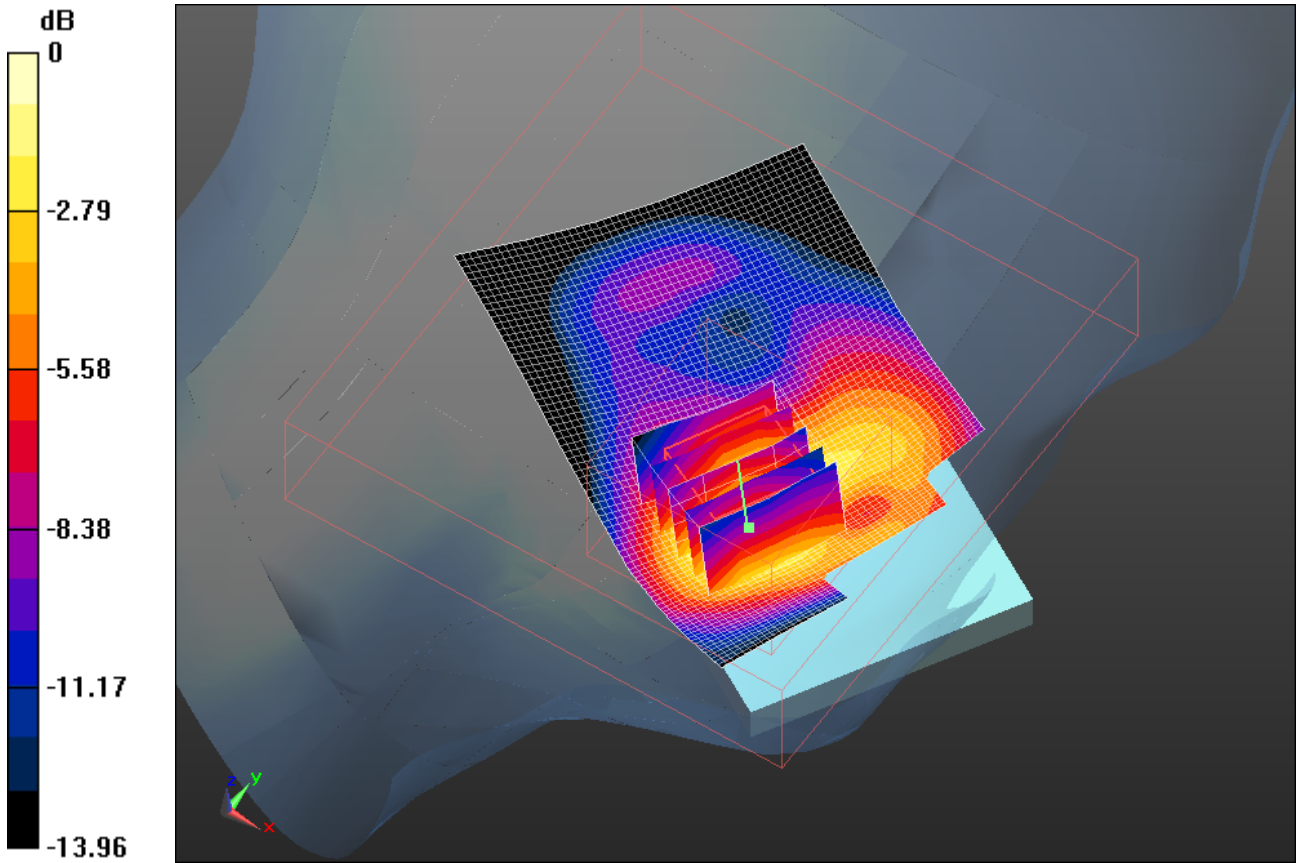

0 dB = 0.970mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 32(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/3/2011 11:58:13 AM, Date/Time: 5/3/2011 12:03:17 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_low_chan_amb_temp_23.3_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: GSM 1900; Frequency: 1850.2 MHz; Communication System

PAR: 9.191 dB

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.304$ mho/m; $\epsilon_r = 38.282$;
 $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.330 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.597 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.990 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.701 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.388 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

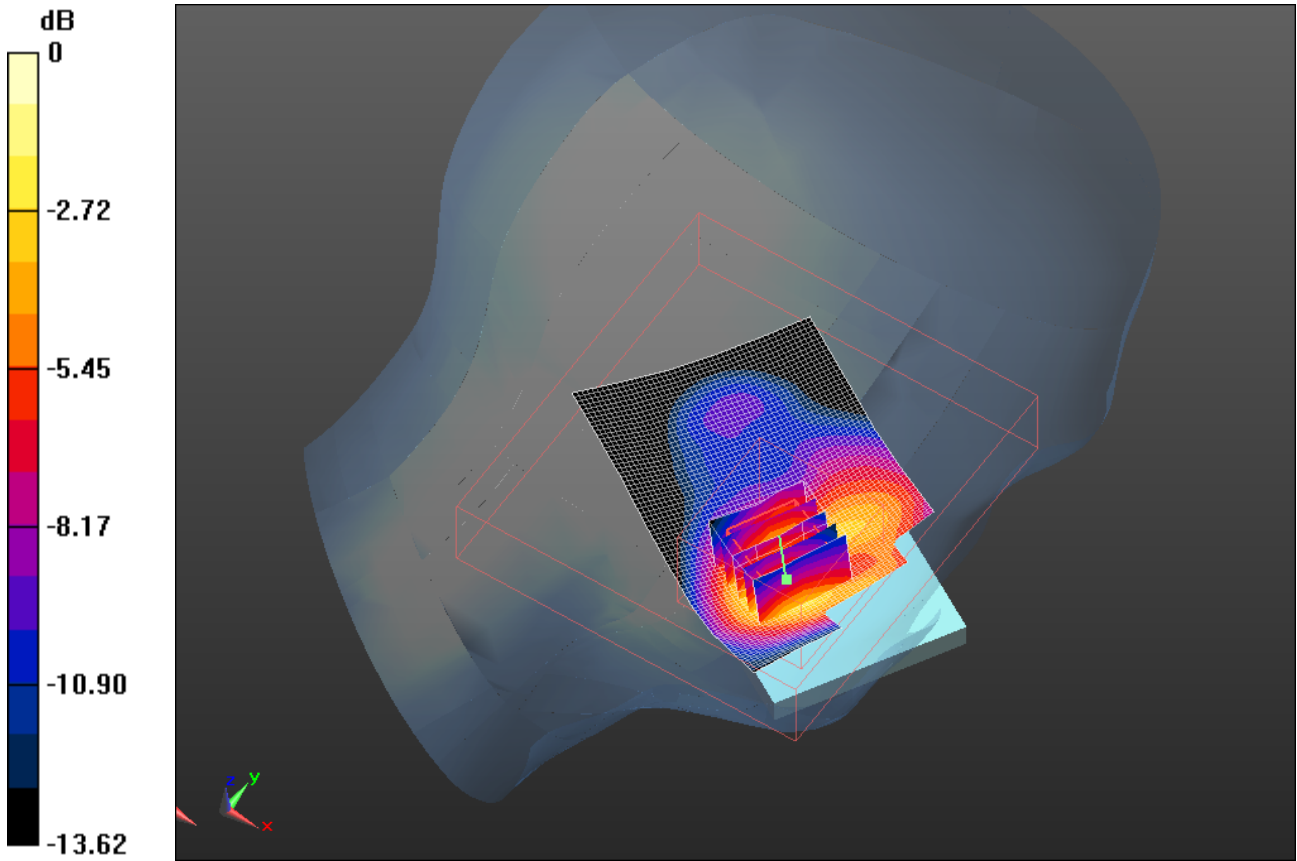

0 dB = 1.390mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 34(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/3/2011 11:46:38 AM, Date/Time: 5/3/2011 11:51:41 AM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_mid_chan_amb_temp_23.1_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.335$ mho/m; $\epsilon_r = 38.14$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.947 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.622 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.454 W/kg

SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.506 mW/g

Maximum value of SAR (measured) = 1.009 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

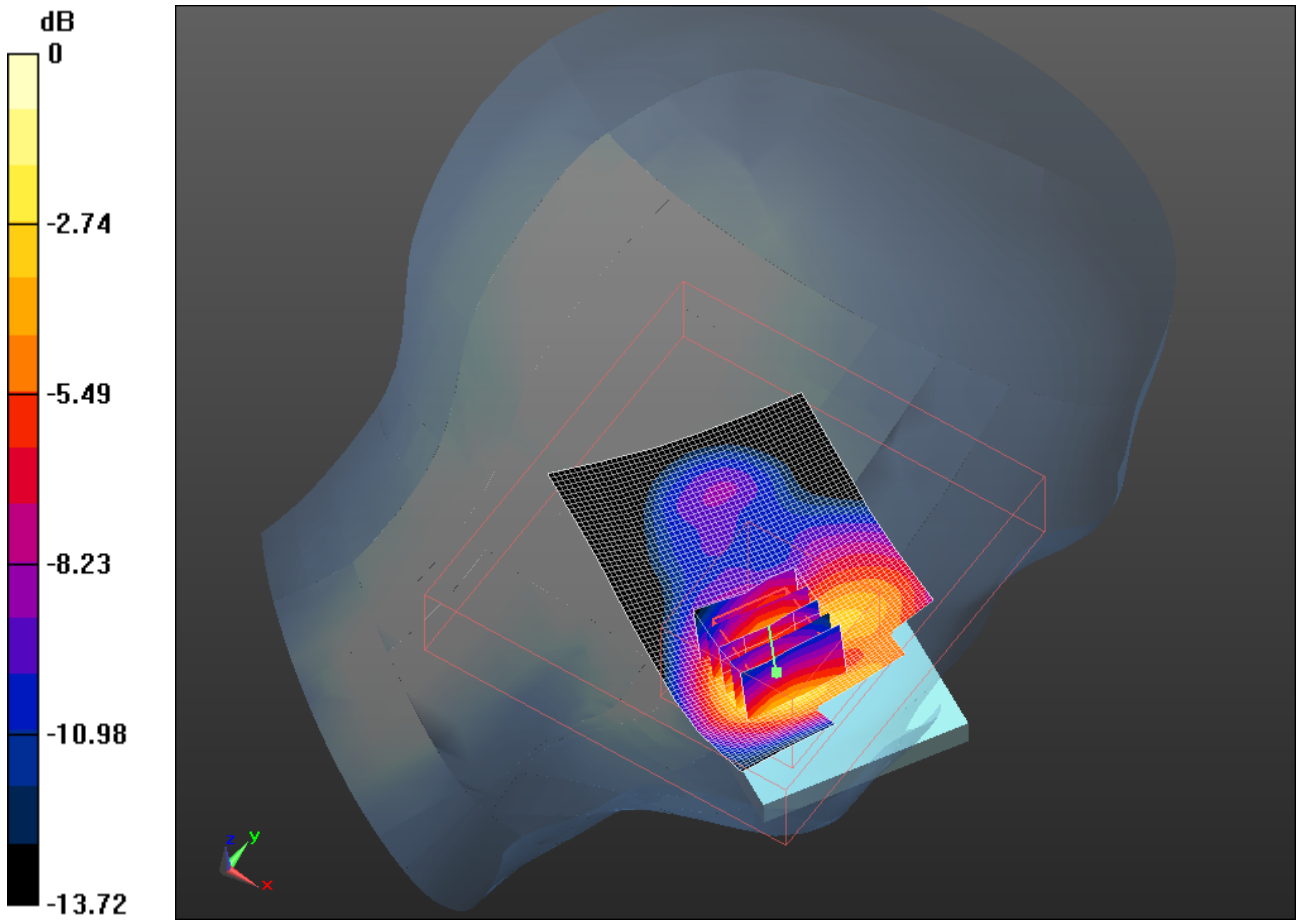

0 dB = 1.010mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			36(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	Apr 13 – July 11, 2011	RTS-2579-1106-34B	L6ARDX70UW	2503A-RDX70UW

Date/Time: 5/3/2011 12:10:24 PM, Date/Time: 5/3/2011 12:15:28 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_high_chan_amb_temp_23.4_liq_temp_22.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: GSM 1900; Frequency: 1909.8 MHz; Communication System
PAR: 9.191 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.364$ mho/m; $\epsilon_r = 38.041$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.759 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.541 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.154 W/kg

SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.400 mW/g

Maximum value of SAR (measured) = 0.799 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

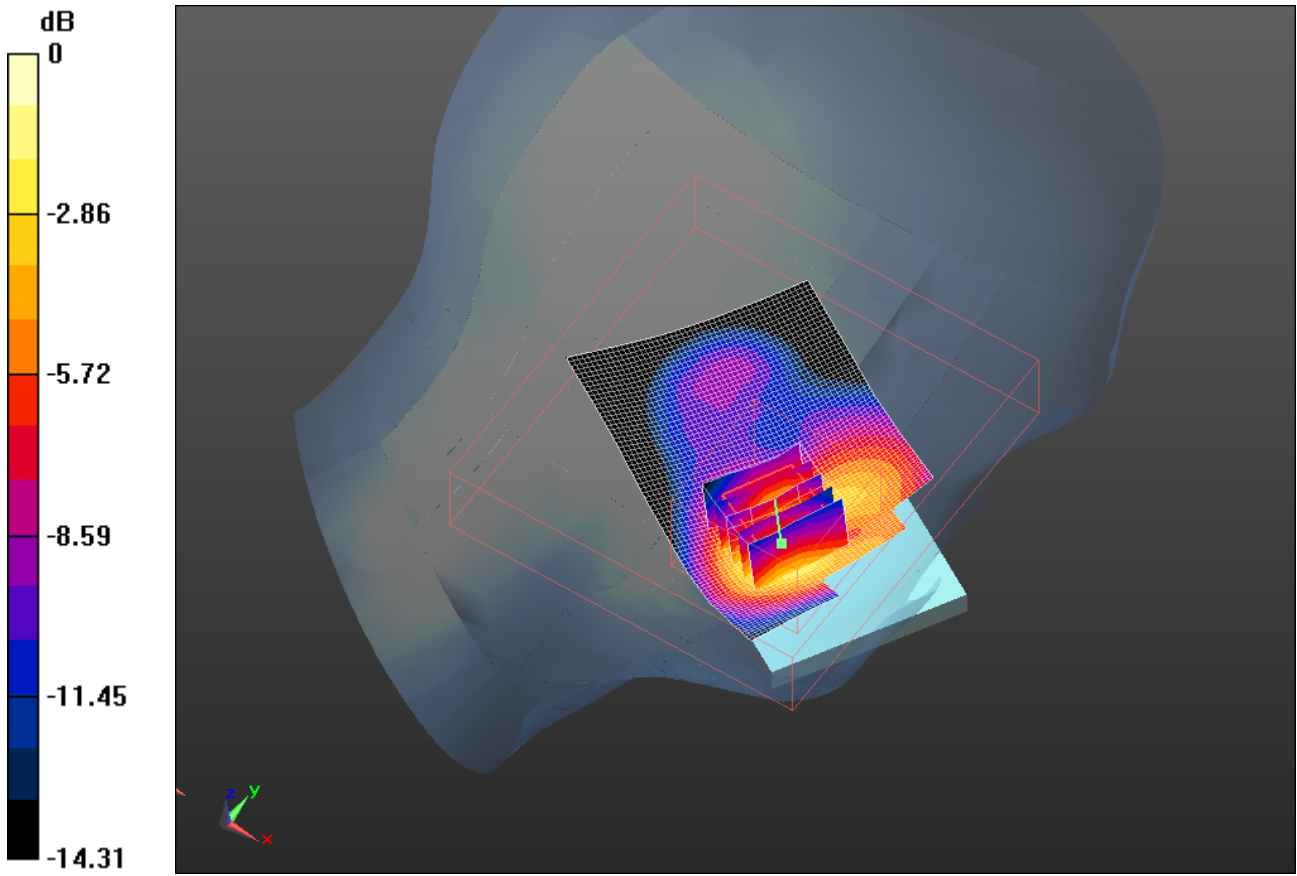

0 dB = 0.800mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 38(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 5/3/2011 12:34:30 PM, Date/Time: 5/3/2011 12:39:40 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_GSM1900_mid_chan_amb_temp_23.3_liq_temp_22.3

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System

PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.335$ mho/m; $\epsilon_r = 38.14$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.317 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.858 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.322 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

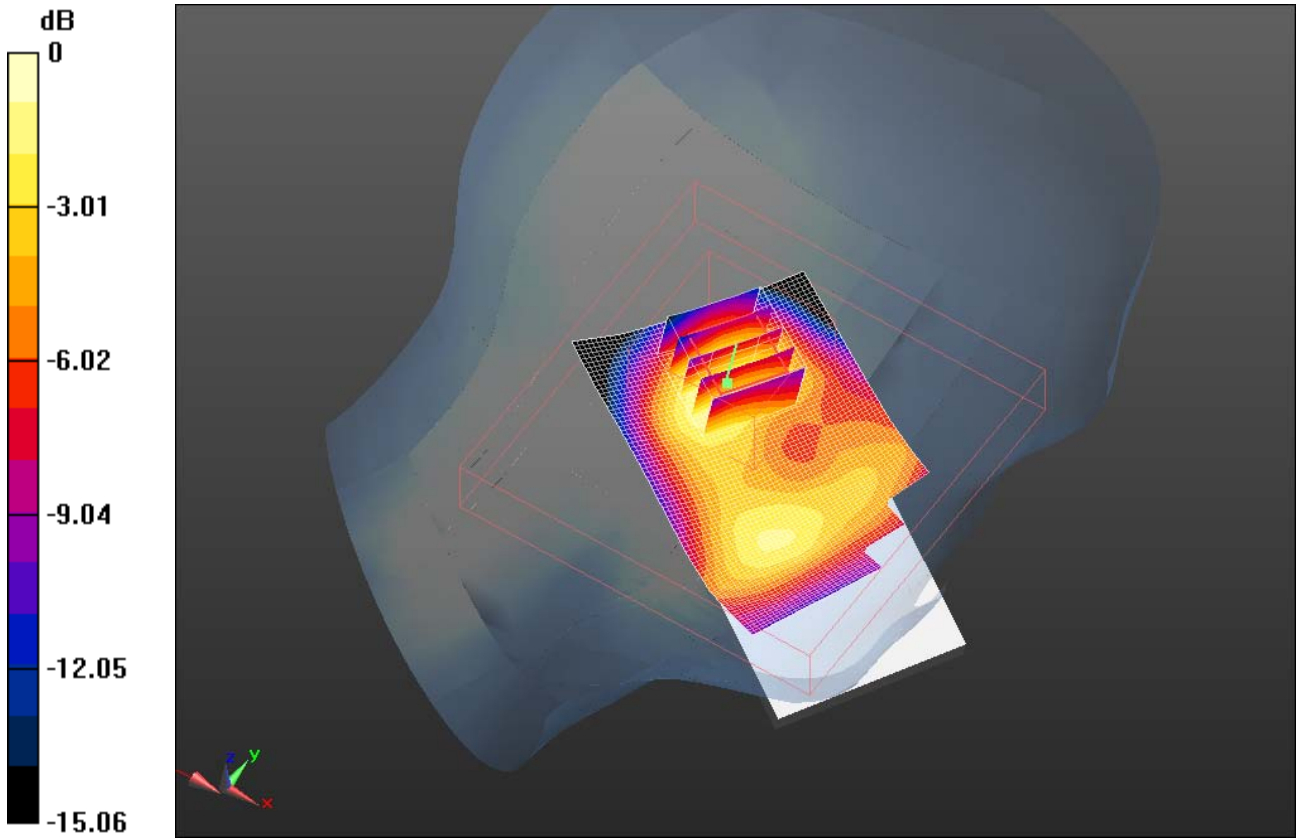

0 dB = 0.320mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 40(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 6/8/2011 9:15:42 PM, Date/Time: 6/8/2011 9:20:50 PM, Date/Time: 6/8/2011 9:28:15 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_low_chan_amb_temp_23.5_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51

Communication System: EDGE 1900; Communication System Band: EDGE 1900;
Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.321$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.038 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.089 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.596 W/kg
SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.572 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.070 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 41(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (6x6x5)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 10.089 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 1.395 W/kg
SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.585 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.975 mW/g

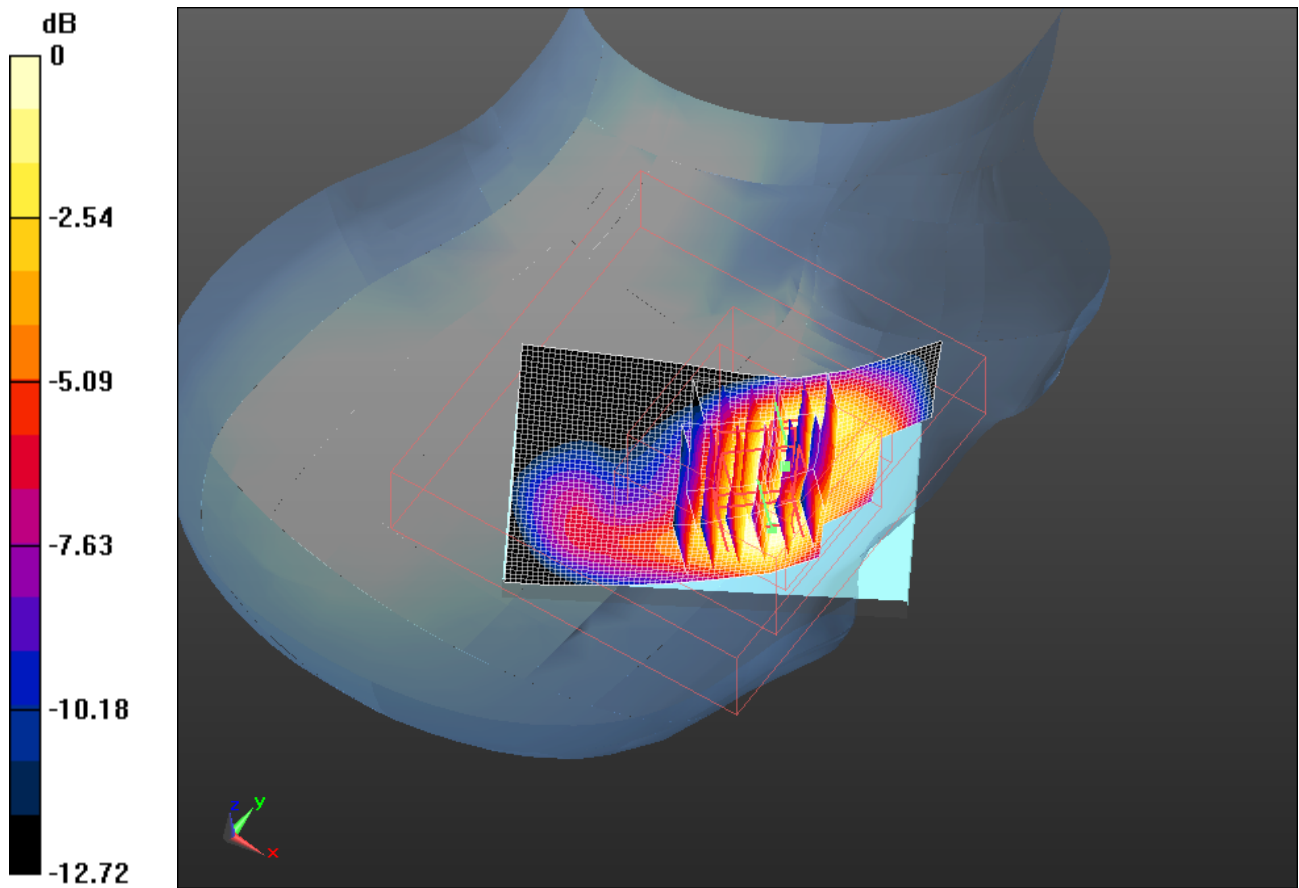

0 dB = 0.980mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 42(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 6/8/2011 9:39:21 PM, Date/Time: 6/8/2011 9:44:23 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_low_chan_amb_temp_23.2_liq_temp_22.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51

Communication System: EDGE 1900; Communication System Band: EDGE 1900;
Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.321$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.477 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.928 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 2.194 W/kg
SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.802 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.514 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 43(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

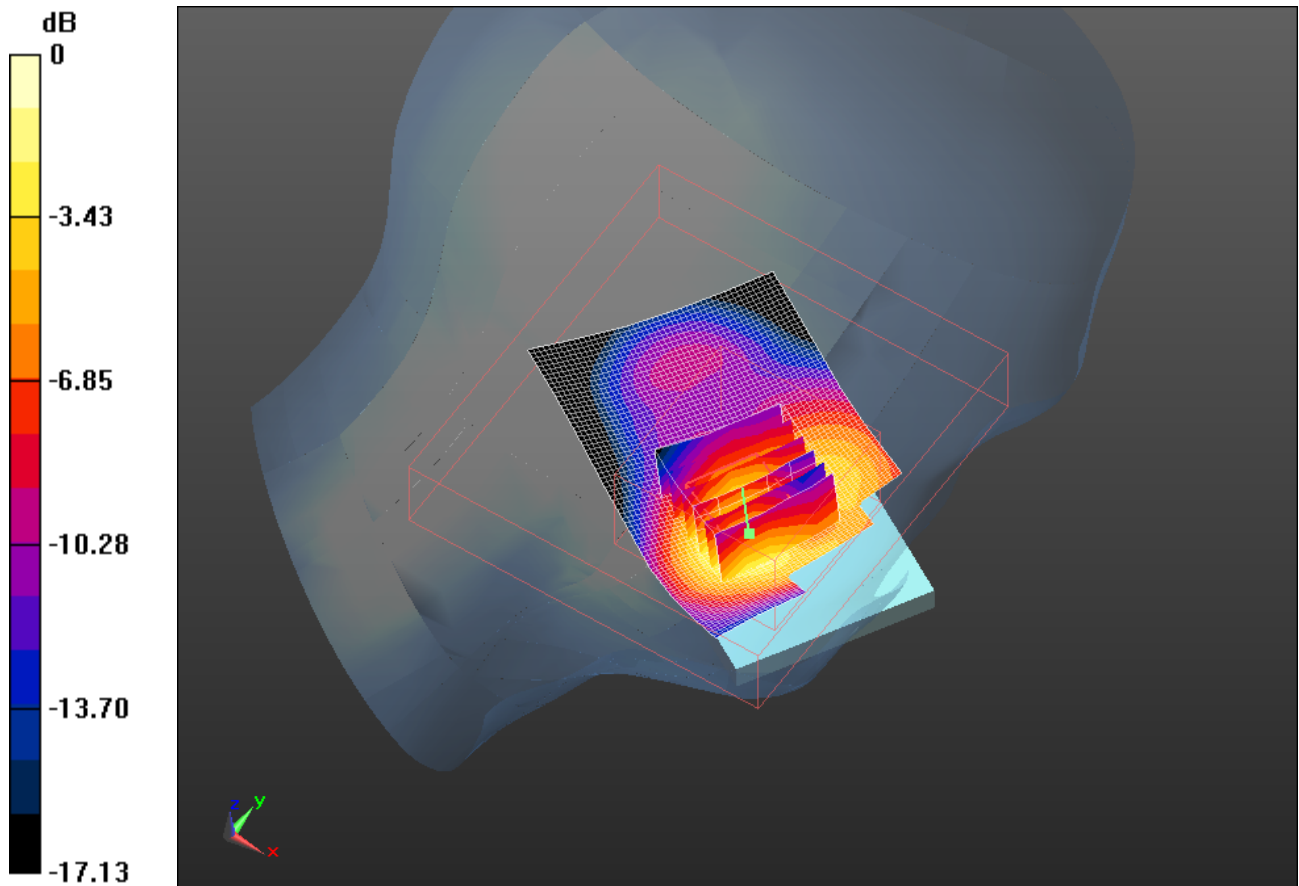

0 dB = 1.510mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 44(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 5:36:45 PM, Date/Time: 4/13/2011 5:42:04 PM, Date/Time:
4/13/2011 5:52:59 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_low_chan_amb_temp_23.6_liq_temp_2

2.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.22$ mho/m; $\epsilon_r = 38.676$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.075 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.207 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.470 W/kg

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.561 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 45(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW


Maximum value of SAR (measured) = 0.961 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.207 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.446 W/kg
SAR(1 g) = 0.937 mW/g; SAR(10 g) = 0.576 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.012 mW/g

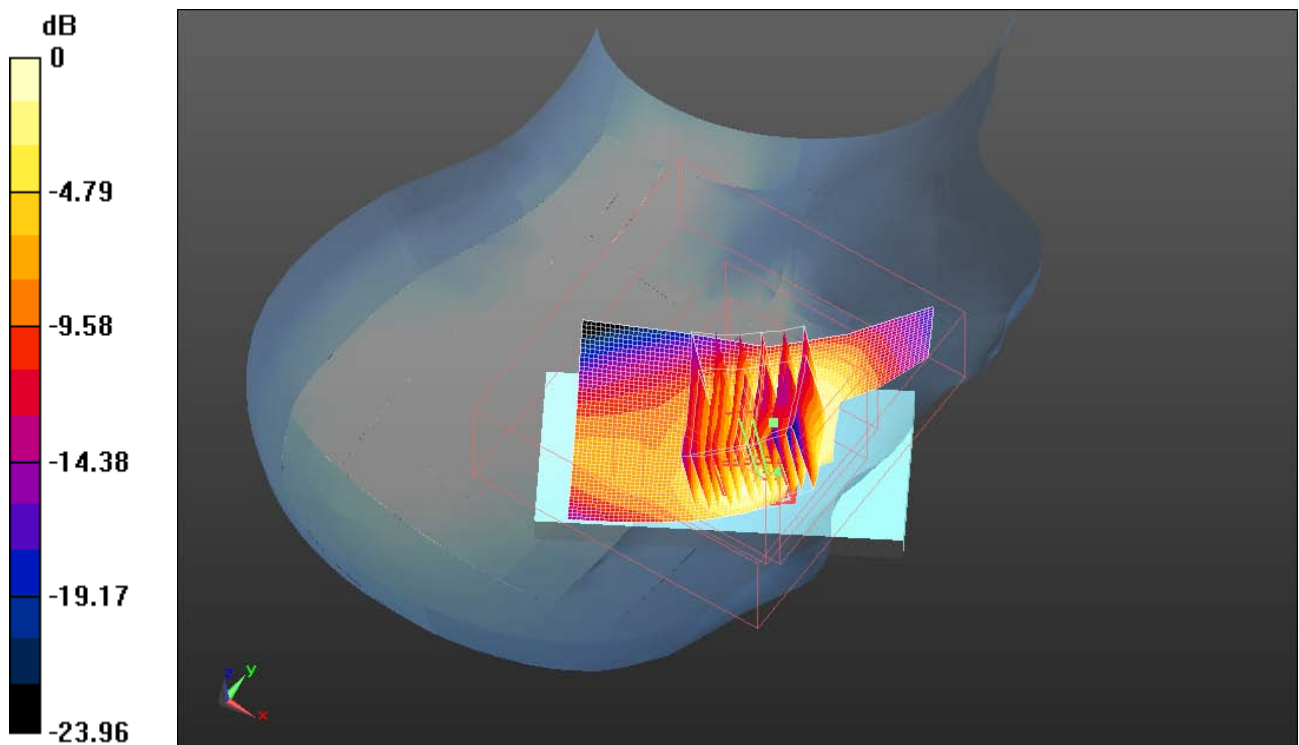

0 dB = 1.010mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 46(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 5:03:12 PM, Date/Time: 4/13/2011 5:08:32 PM, Date/Time: 4/13/2011 5:22:20 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_mid_chan_amb_temp_23.5_liq_temp_2 2.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.215$ mho/m; $\epsilon_r = 38.53$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.034 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.973 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.465 W/kg

SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.554 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.952 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 47(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.973 V/m; Power Drift = -0.26 dB
Peak SAR (extrapolated) = 1.471 W/kg
SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.567 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.984 mW/g

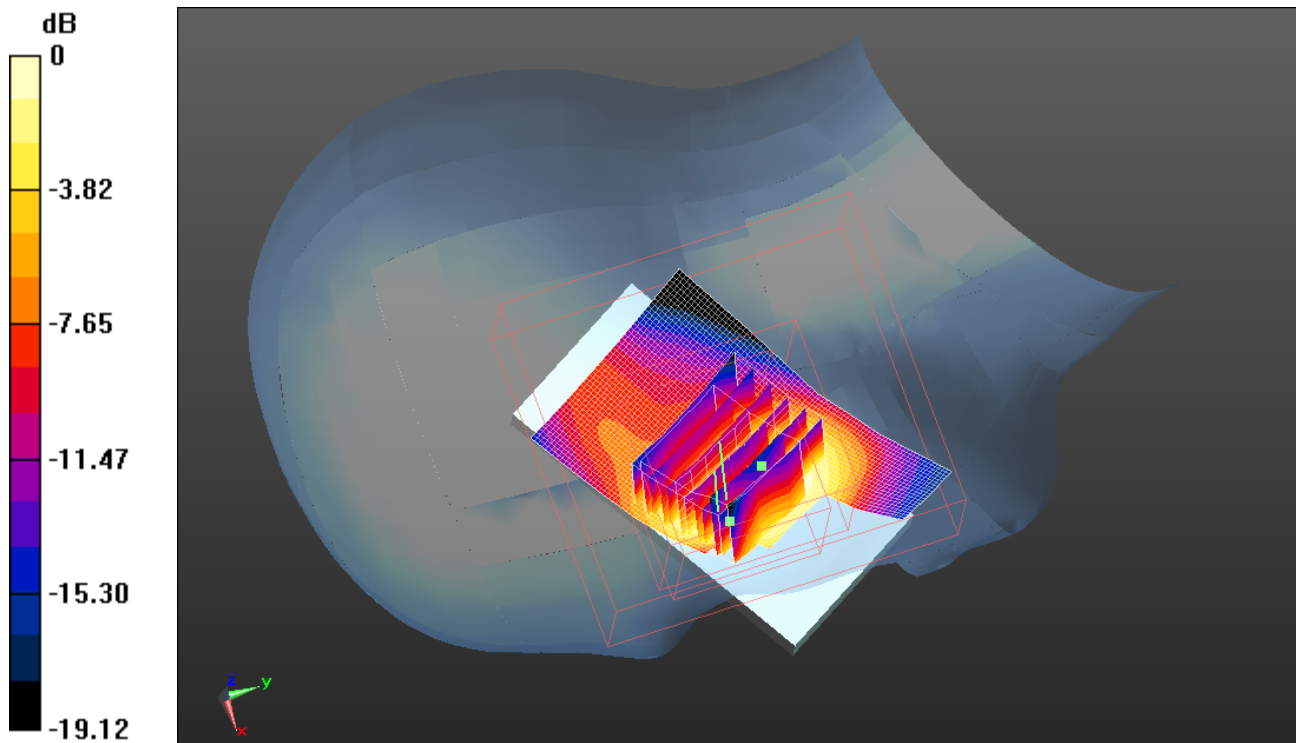

0 dB = 0.980mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 48(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 6:24:25 PM, Date/Time: 4/13/2011 6:29:44 PM, Date/Time: 4/13/2011 6:38:19 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_high_chan_amb_temp_23.7_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.264$ mho/m; $\epsilon_r = 38.243$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.025 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.862 V/m; Power Drift = -0.22 dB
Peak SAR (extrapolated) = 1.436 W/kg
SAR(1 g) = 0.881 mW/g; SAR(10 g) = 0.544 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.951 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 49(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (6x6x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.862 V/m; Power Drift = -0.21 dB
Peak SAR (extrapolated) = 1.429 W/kg
SAR(1 g) = 0.878 mW/g; SAR(10 g) = 0.531 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.946 mW/g

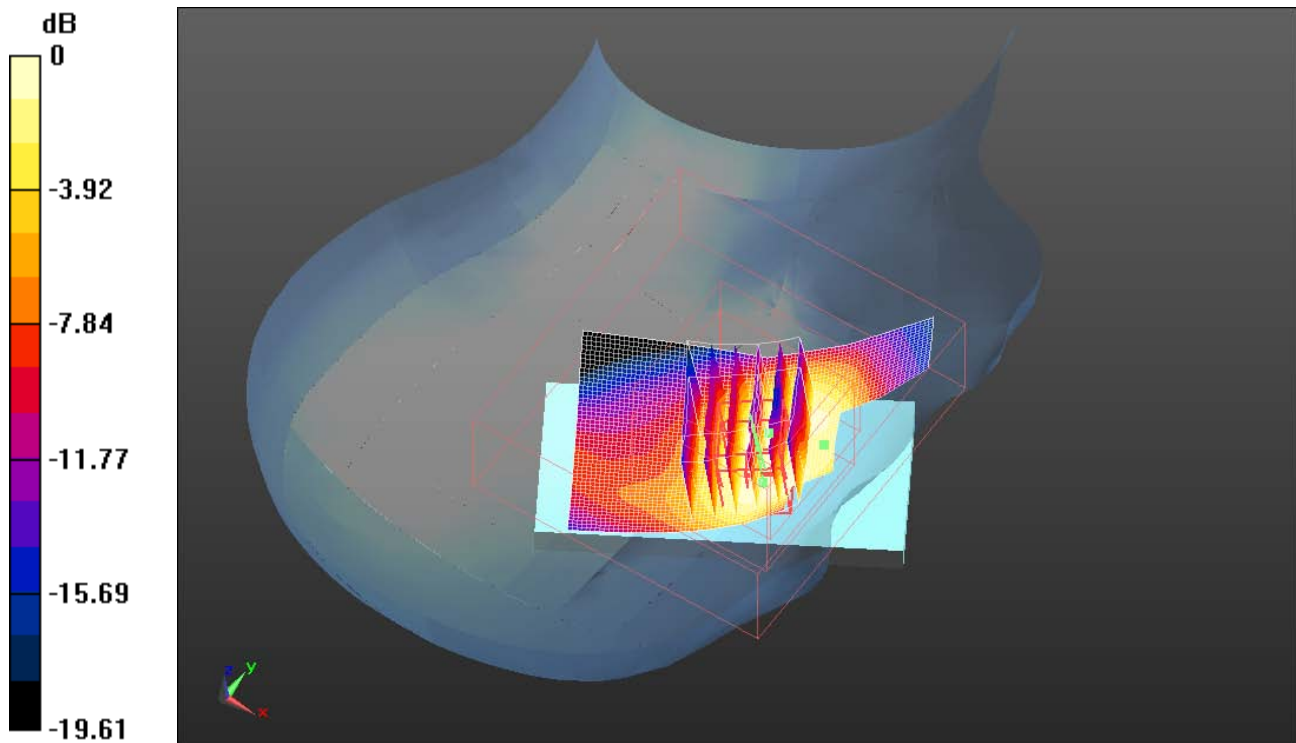

0 dB = 0.950mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 50(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 6:55:17 PM, Date/Time: 4/13/2011 7:00:35 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_band_IV_mid_chan_amb_temp_23.7_liq_temper_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.264$ mho/m; $\epsilon_r = 38.243$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.272 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.029 V/m; Power Drift = -0.0052 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.128 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.248 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

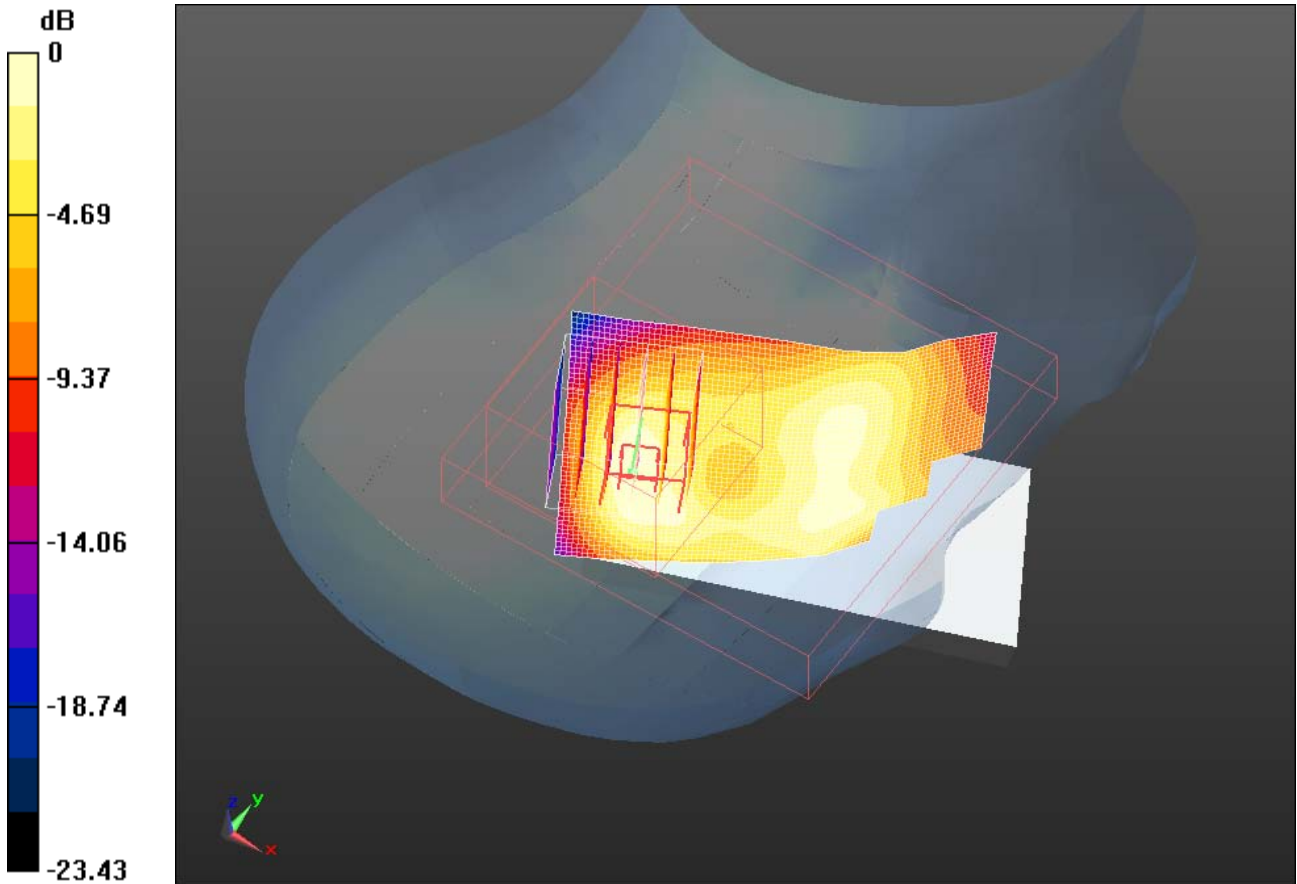

0 dB = 0.250mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 52(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 3:54:59 PM, Date/Time: 4/13/2011 3:59:39 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_IV_low_chan_amb_temp_24.4_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.22$ mho/m; $\epsilon_r = 38.676$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.529 mW/g

Configuration/Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.878 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.256 W/kg

SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.788 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.477 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 53(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

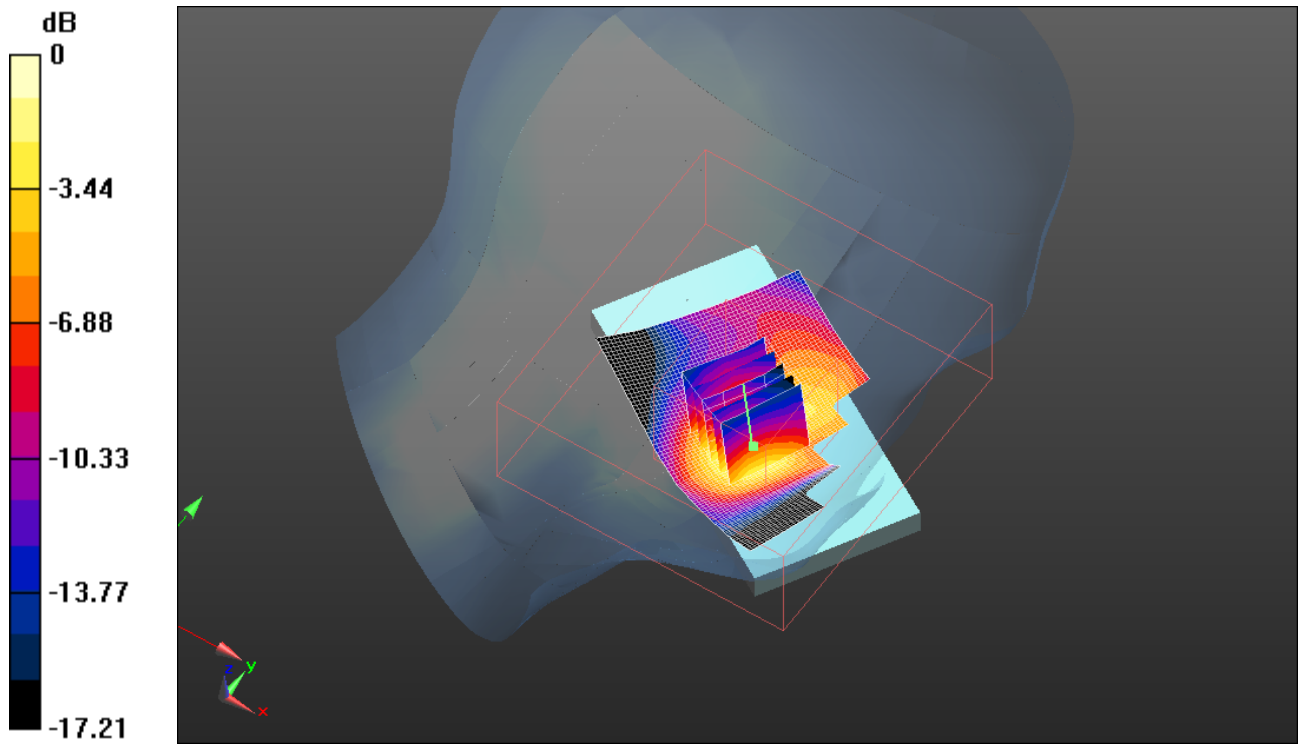

0 dB = 1.480mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 54(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 3:37:02 PM, Date/Time: 4/13/2011 3:43:25 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_UMTS_band_IV_mid_chan_amb_temp_24.6_liq_temp_22
.7C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.215$ mho/m; $\epsilon_r = 38.53$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.502 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.039 V/m; Power Drift = -0.30 dB

Peak SAR (extrapolated) = 2.190 W/kg

SAR(1 g) = 1.37 mW/g; SAR(10 g) = 0.762 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.453 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

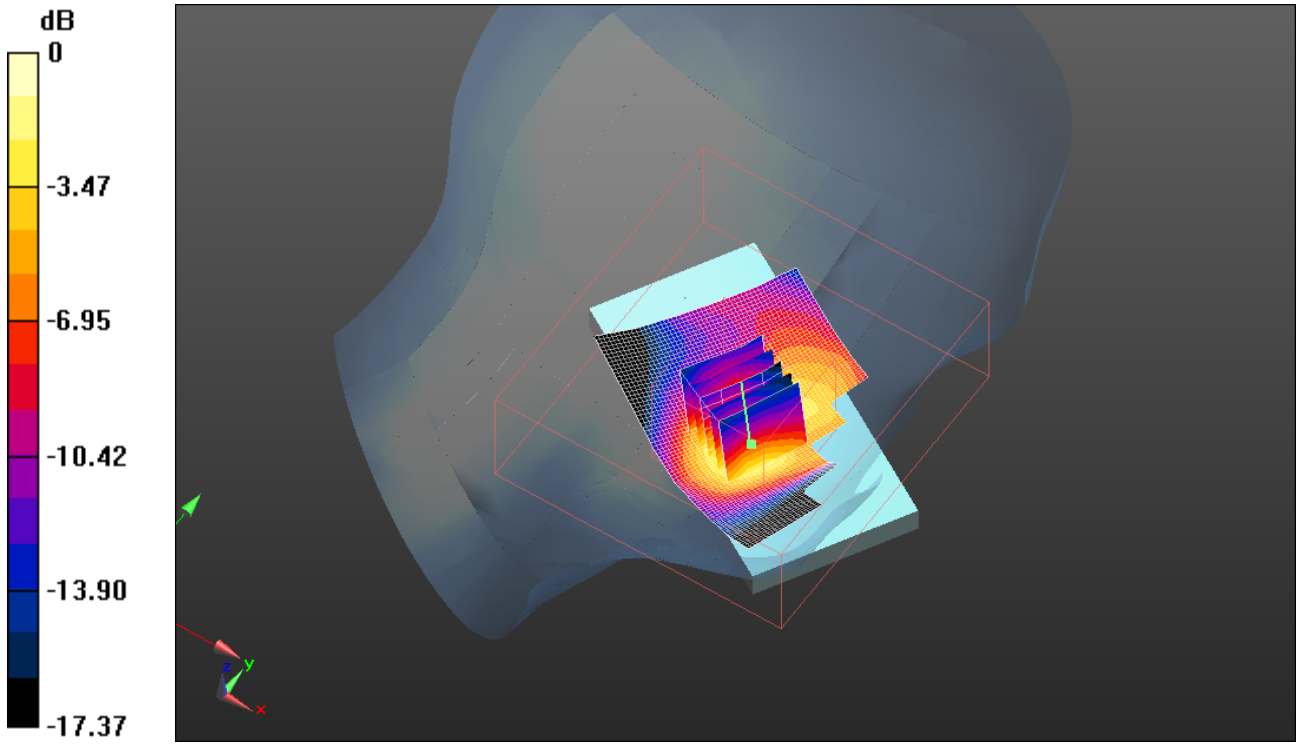

0 dB = 1.450mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 56(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 4:25:52 PM, Date/Time: 4/13/2011 4:30:34 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_IV_high_chan_amb_temp_24.6_liq_temp_2

2.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.264$ mho/m; $\epsilon_r = 38.243$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.319 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.940 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.963 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.678 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.282 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 57(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

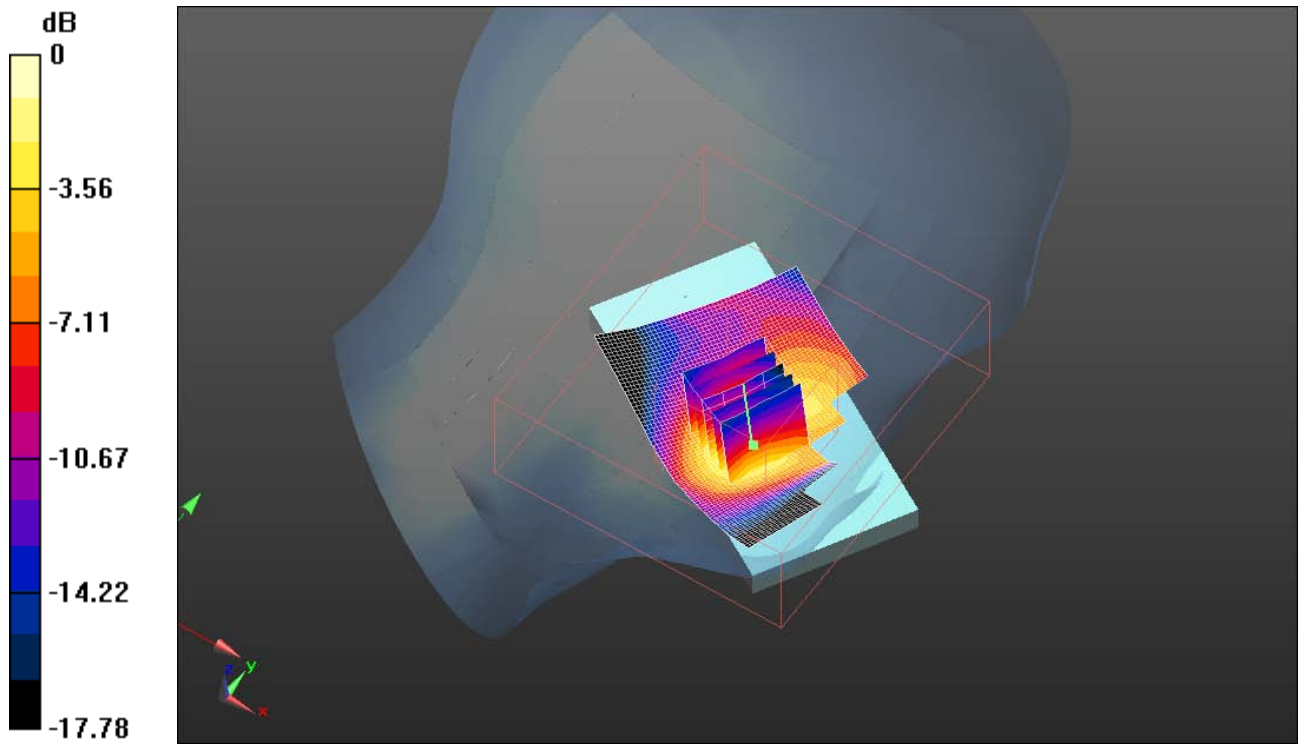

0 dB = 1.280mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 58(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/13/2011 4:45:16 PM, Date/Time: 4/13/2011 4:50:25 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_UMTS_band_IV_mid_chan_amb_temp_24.9_liq_tem p_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: Frequency: 1732.6 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.215$ mho/m; $\epsilon_r = 38.53$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.353 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.577 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.196 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.352 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

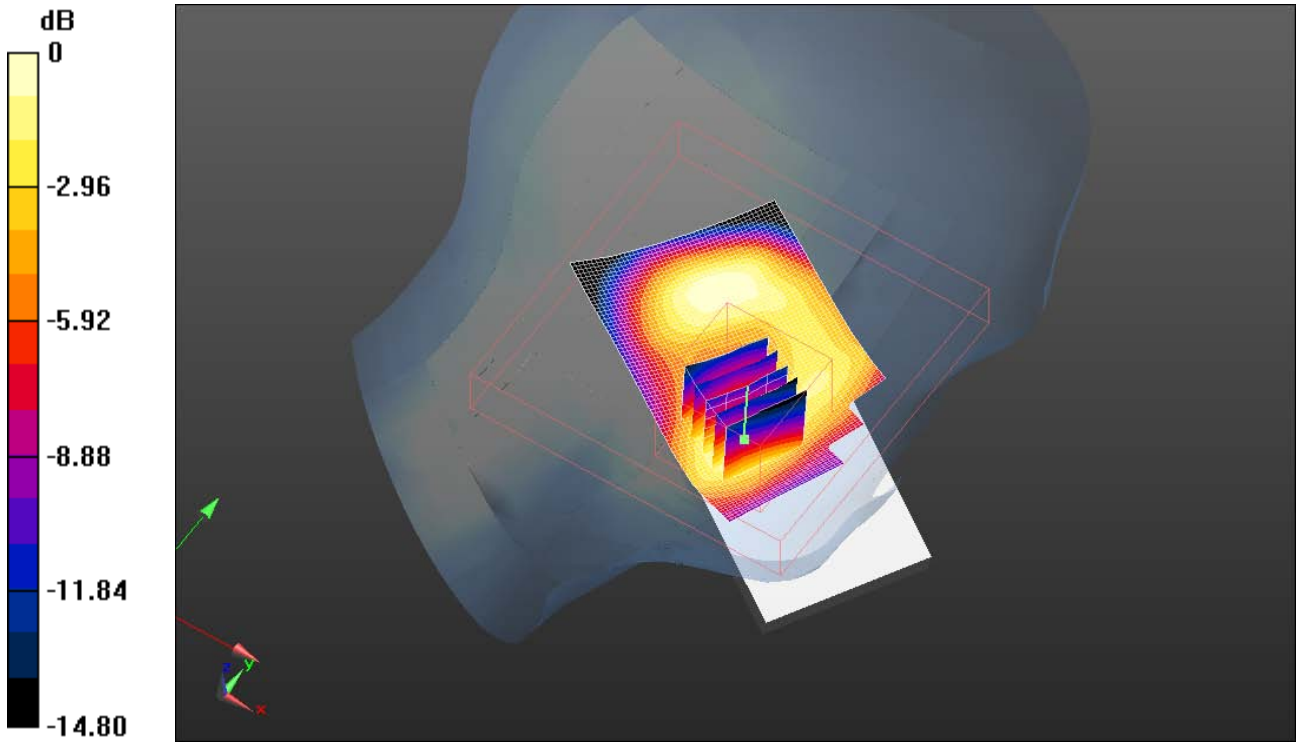

0 dB = 0.350mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 60(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/27/2011 5:08:17 PM, Date/Time: 4/27/2011 5:17:14 PM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_low_chan_amb_temp_23.1_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.846$ mho/m; $\epsilon_r = 39.148$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.454 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.509 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.228 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.550 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

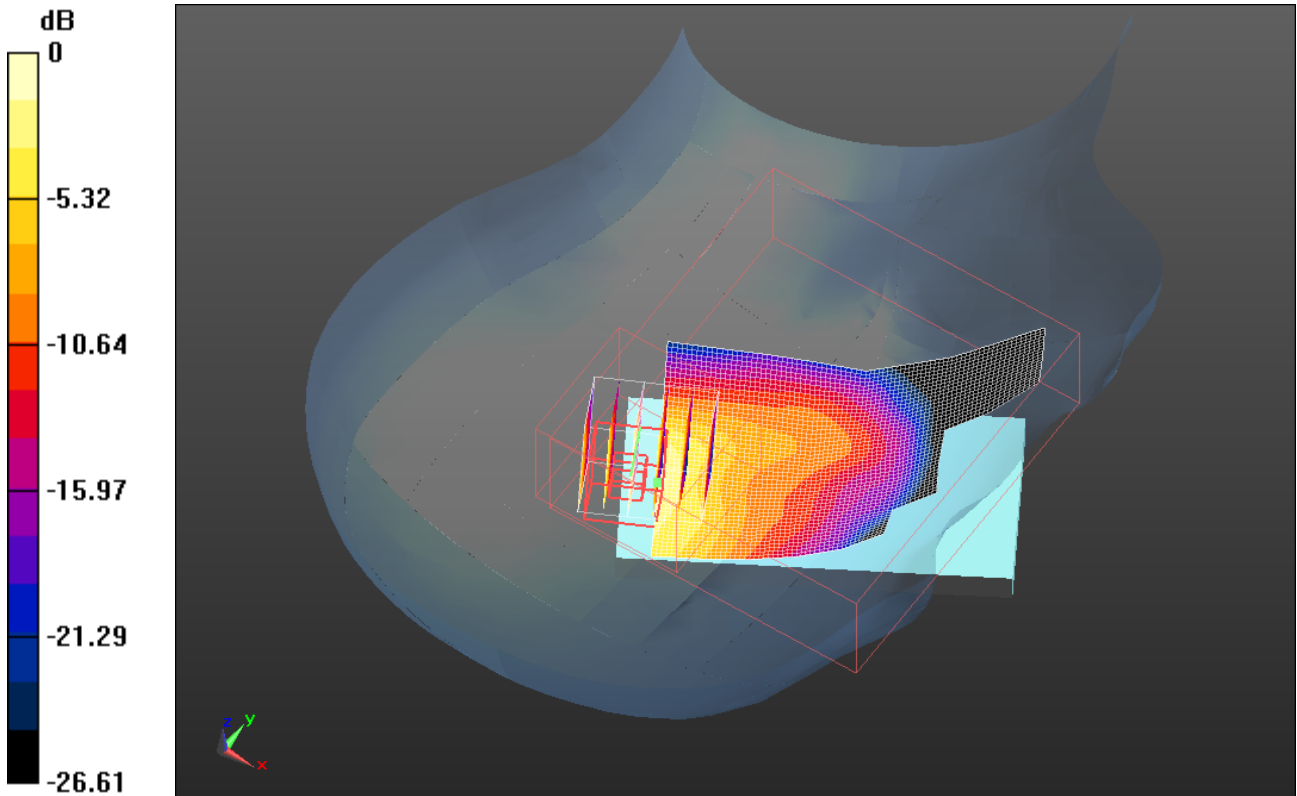

0 dB = 0.550mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 62(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/27/2011 5:27:14 PM, Date/Time: 4/27/2011 5:32:33 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_802.11b_low_chan_amb_temp_23.1_liq_temp_22.0

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.846$ mho/m; $\epsilon_r = 39.148$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.544 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.478 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.235 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.548 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

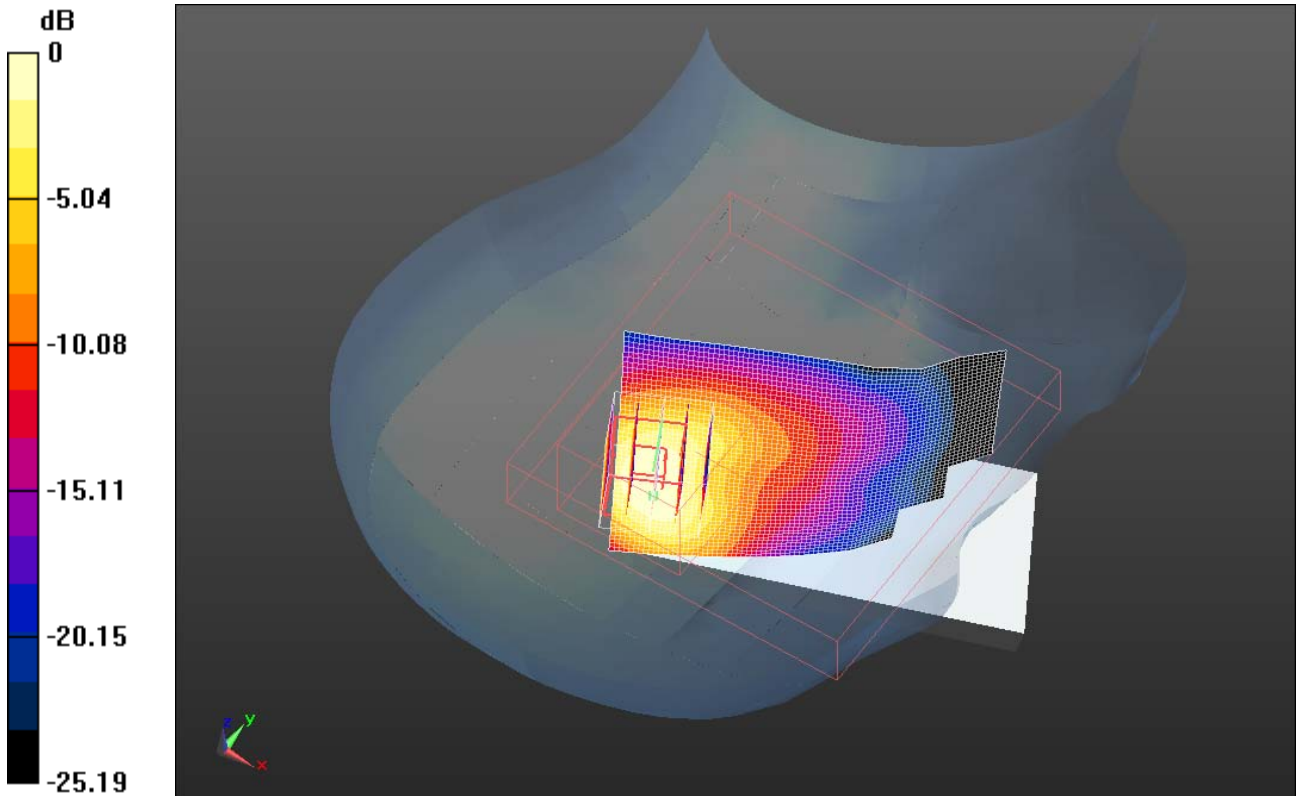

0 dB = 0.550mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 64(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/27/2011 5:44:56 PM, Date/Time: 4/27/2011 5:51:06 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_low_chan_amb_temp_22.9_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.846$ mho/m; $\epsilon_r = 39.148$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.480 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.356 V/m; Power Drift = 0.45 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.235 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.551 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

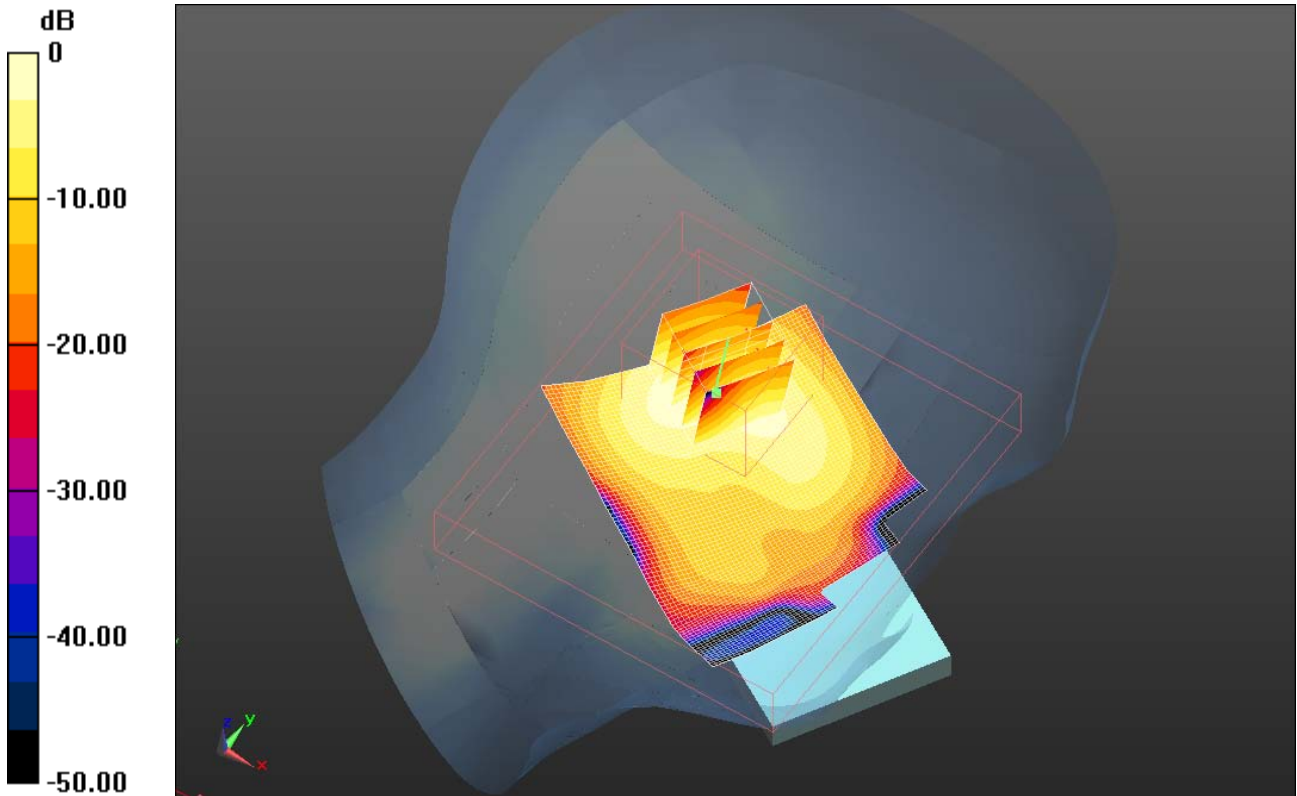

0 dB = 0.550mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 66(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/27/2011 5:59:30 PM, Date/Time: 4/27/2011 6:05:45 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11b_low_chan_amb_temp_22.9_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 27269EDE

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.846$ mho/m; $\epsilon_r = 39.148$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.549 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.540 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.253 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.568 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

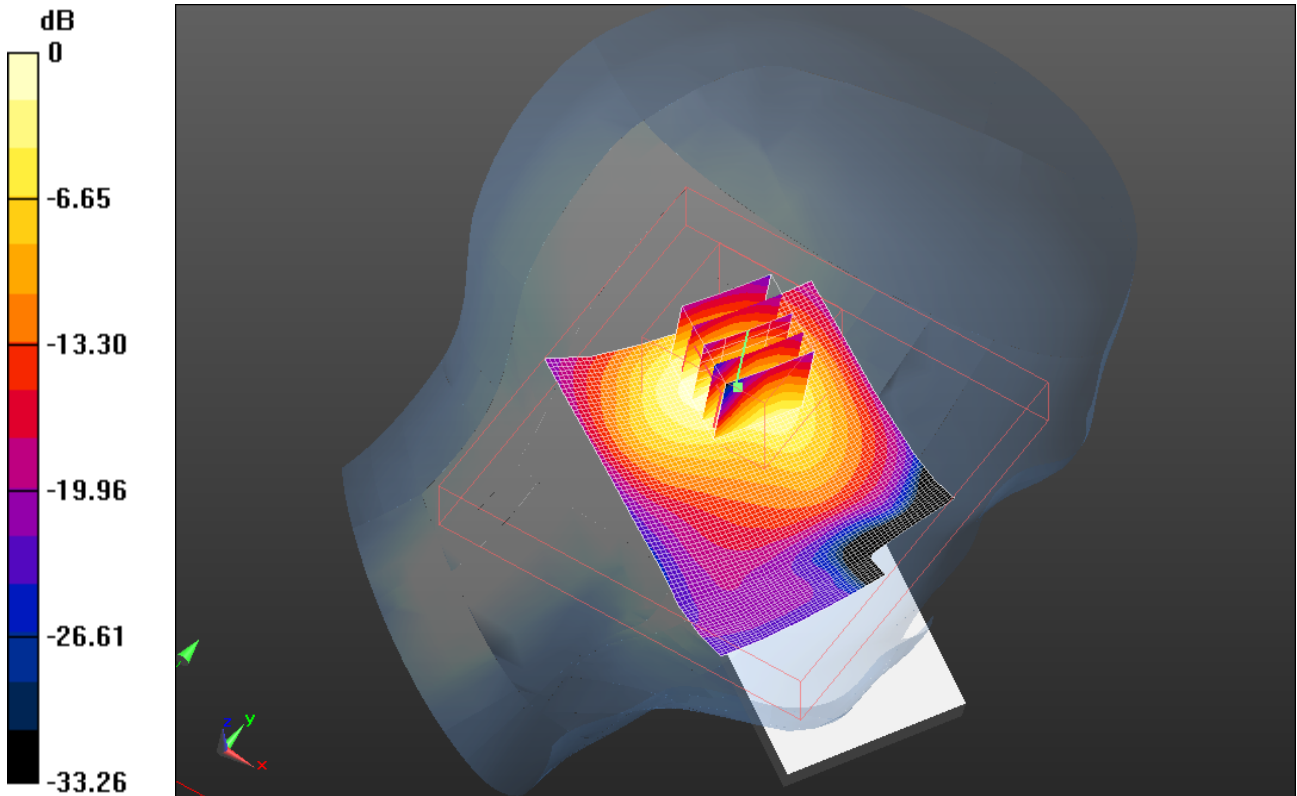

0 dB = 0.570mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 68(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 6/16/2011 9:39:12 AM, Date/Time: 6/16/2011 9:44:29 AM

Test Laboratory: RIM Testing Services

RightHandSide_BT_mid_chan_amb_temp_23.4_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51

Communication System: Bluetooth; Communication System Band: Bluetooth;
Frequency: 2441 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.883$ mho/m; $\epsilon_r = 40.624$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.012 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.124 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.0078 mW/g; SAR(10 g) = 0.00382 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00918 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

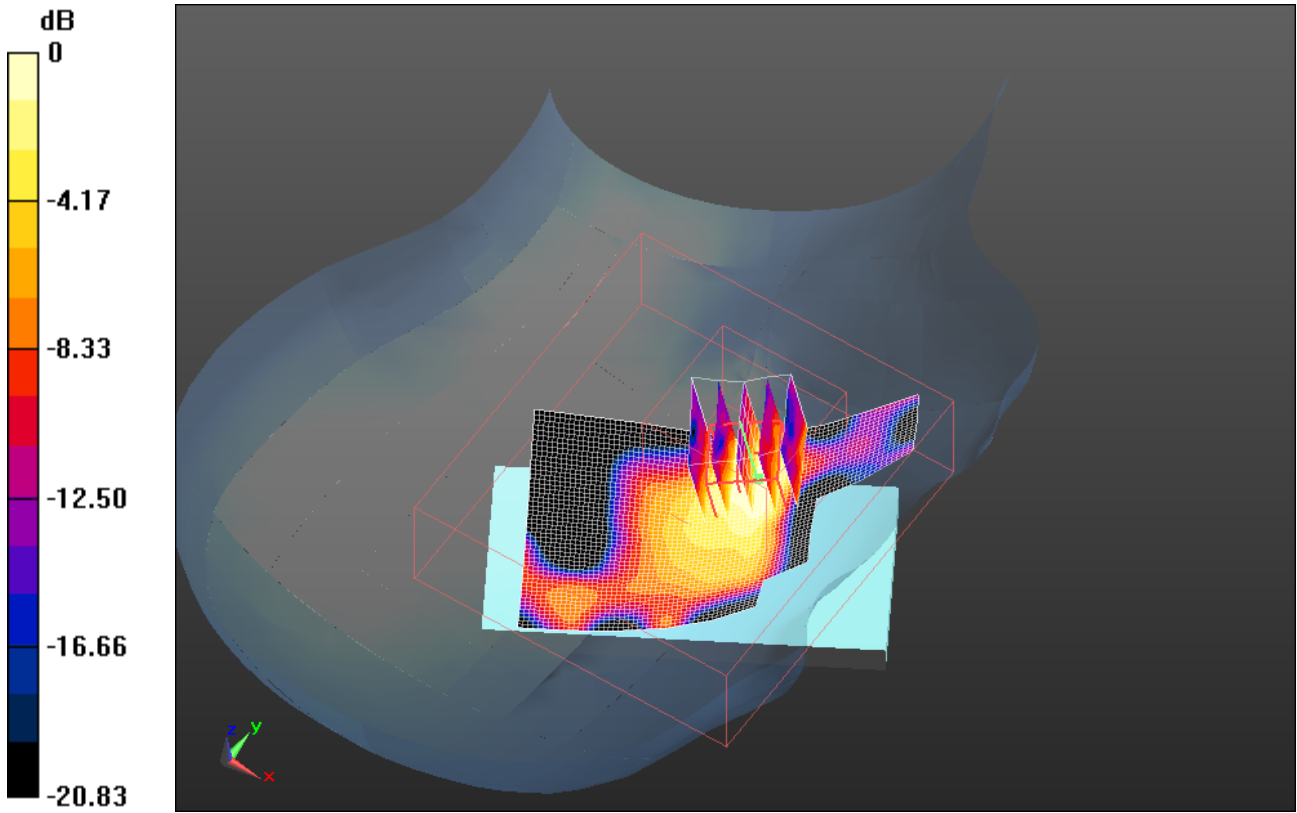

0 dB = 0.0092mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 70(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 6/16/2011 9:17:06 AM, Date/Time: 6/16/2011 9:22:53 AM

Test Laboratory: RIM Testing Services

LeftHandSide_BT_mid_chan_amb_temp_23.3_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 279CCF51

Communication System: Bluetooth; Communication System Band: Bluetooth;
Frequency: 2441 MHz; Communication System PAR: 0 dB
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.883$ mho/m; $\epsilon_r = 40.624$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.6, 4.6, 4.6); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.00848 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.192 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.00634 W/kg

SAR(1 g) = 0.00378 mW/g; SAR(10 g) = 0.00213 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00407 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW


IC ID
2503A-RDX70UW

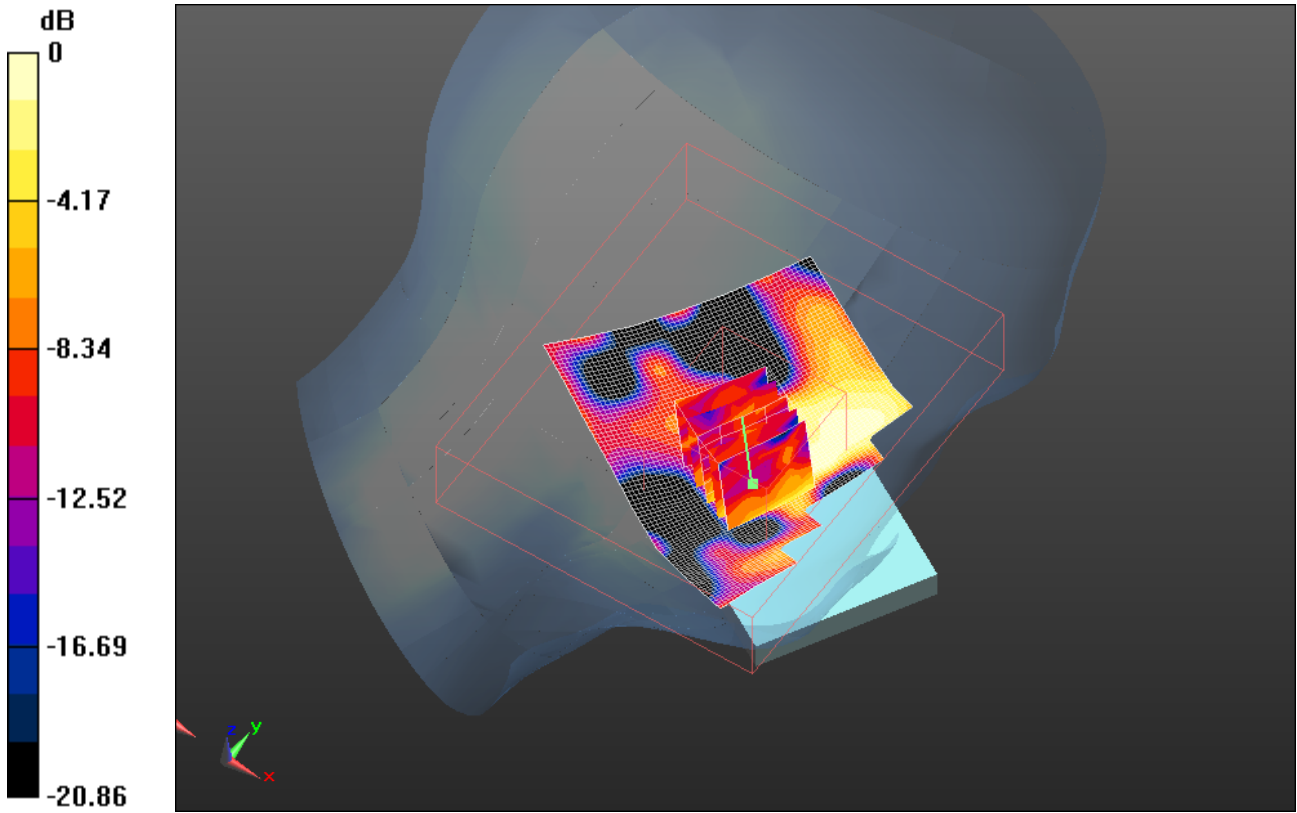


0 dB = 0.0041mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 72(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Z axis plot for the worst case head configuration:

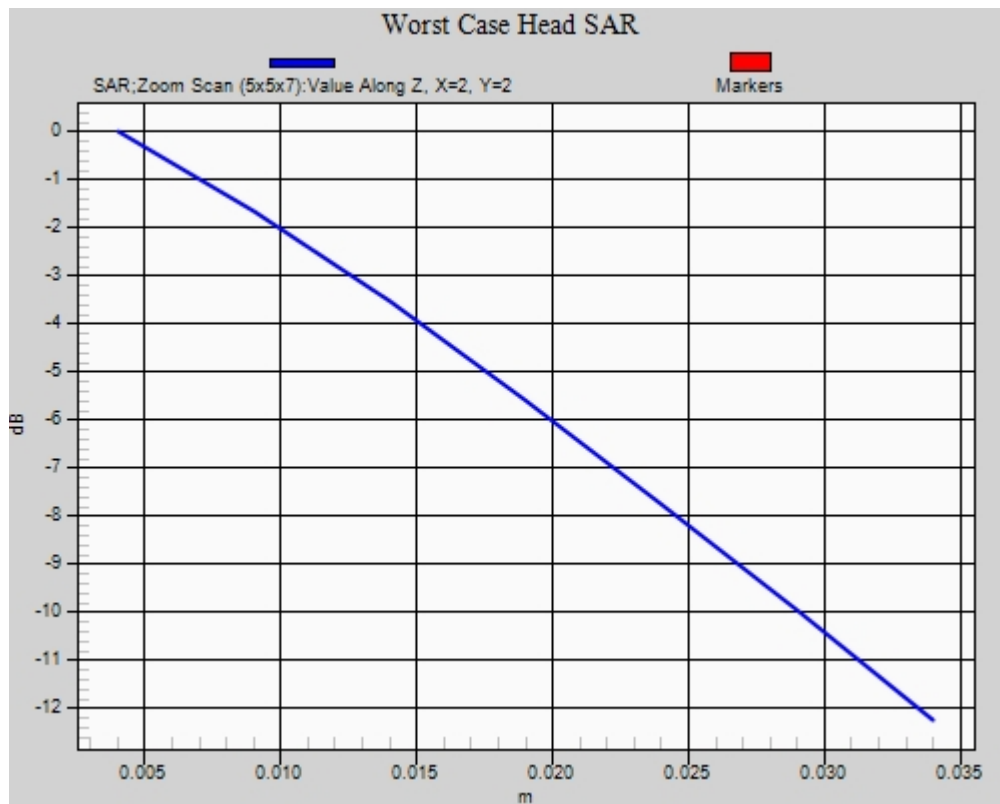

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			73(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	Apr 13 – July 11, 2011	RTS-2579-1106-34B	L6ARDX70UW	2503A-RDX70UW

Date/Time: 7/6/2011 2:29:25 PM, Date/Time: 7/6/2011 2:35:09 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_mid_chan_amb_temp_23.3_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: EDGE 850 (2slots); Communication System Band: EDGE 850;
Frequency: 836.8 MHz; Communication System PAR: 6.232 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.995$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.000 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.056 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.300 W/kg

SAR(1 g) = 0.908 mW/g; SAR(10 g) = 0.633 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.967 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

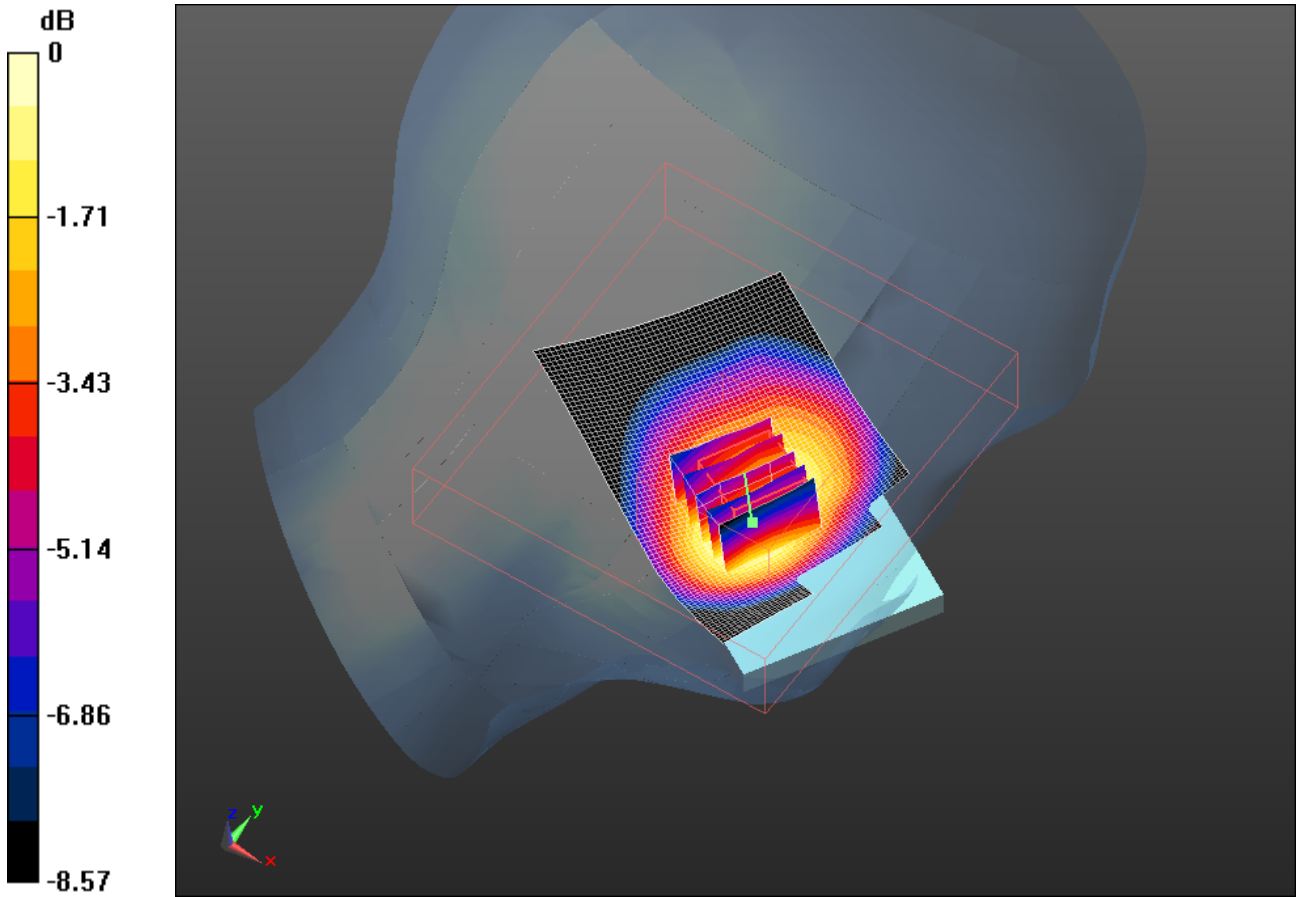

0 dB = 0.970mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 75(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 7/11/2011 7:26:13 PM, Date/Time: 7/11/2011 7:31:14 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_low_chan_amb_temp_23.1_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: EDGE 1900; Communication System Band: EDGE 1900;
Frequency: 1850.2 MHz; Communication System PAR: 6.232 dB
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.324$ mho/m; $\epsilon_r = 40.03$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.219 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.774 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.855 W/kg
SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.650 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.285 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

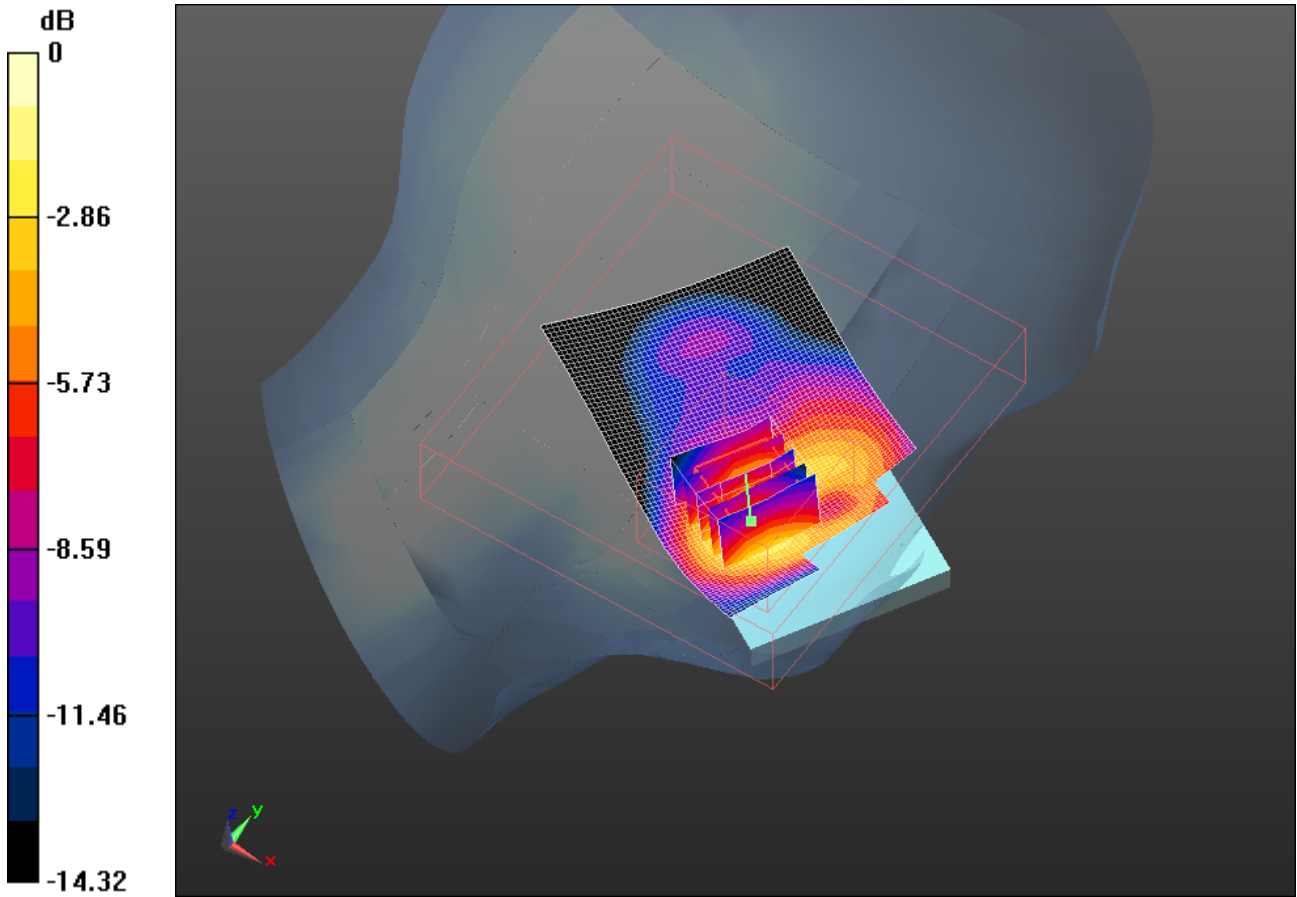

0 dB = 1.290mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 77(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 7/11/2011 7:14:15 PM, Date/Time: 7/11/2011 7:19:16 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_low_chan_amb_temp_23.2_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: GSM 1900; Communication System Band: GSM 1900;
Frequency: 1850.2 MHz; Communication System PAR: 9.191 dB
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.324$ mho/m; $\epsilon_r = 40.03$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.105 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x5)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.155 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.705 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.588 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.178 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

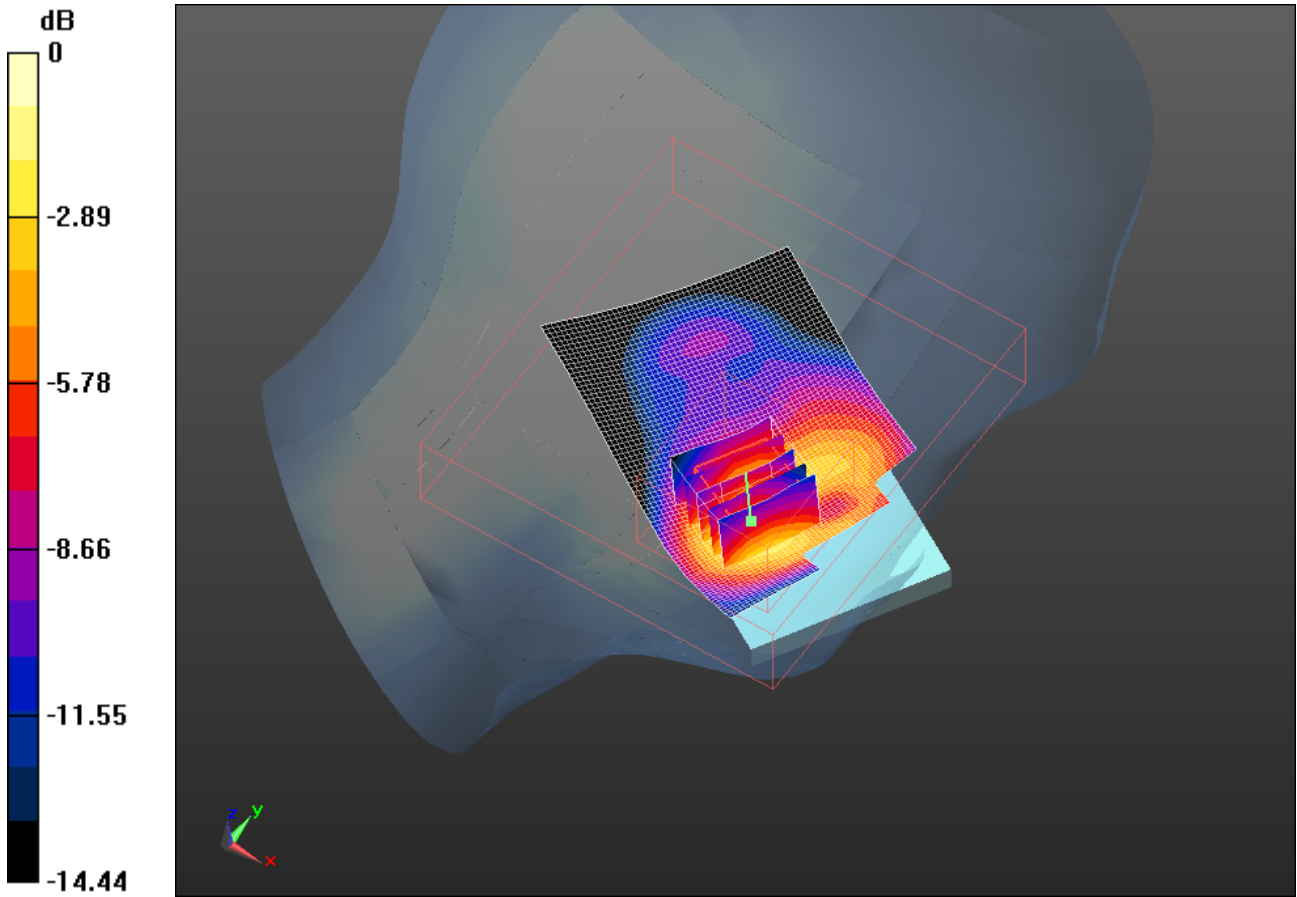

0 dB = 1.180mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			79(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	Apr 13 – July 11, 2011	RTS-2579-1106-34B	L6ARDX70UW	2503A-RDX70UW

Date/Time: 4/21/2011 6:51:35 PM, Date/Time: 4/21/2011 6:56:54 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_V_low_chan_amb_temp_23.3_liq_temp_2 2.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.866$ mho/m; $\epsilon_r = 40.109$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.751 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.729 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.506 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.725 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

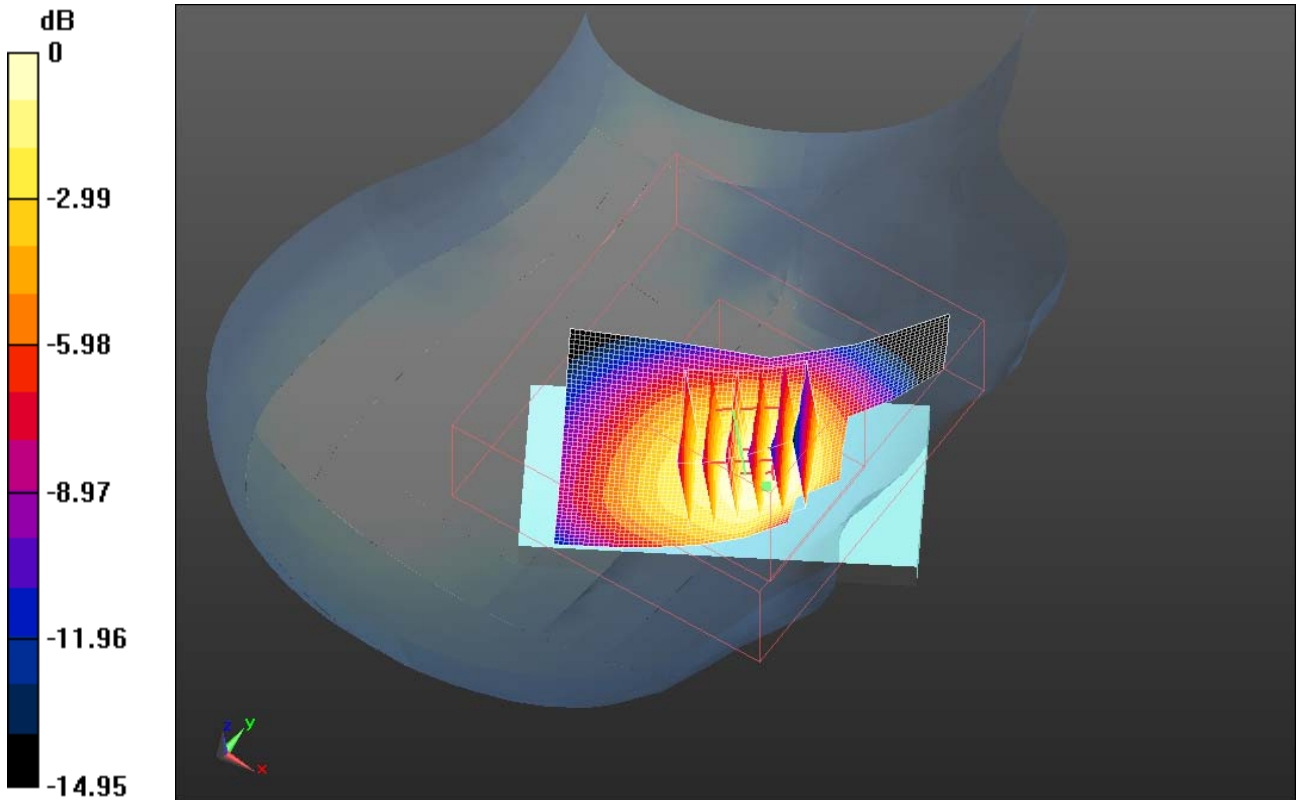

0 dB = 0.730mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 81(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/21/2011 6:35:22 PM, Date/Time: 4/21/2011 6:40:42 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_V_mid_chan_amb_temp_23.2_liq_temp_2 2.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.055$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.949 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.281 V/m; Power Drift = -0.29 dB

Peak SAR (extrapolated) = 1.098 W/kg

SAR(1 g) = 0.858 mW/g; SAR(10 g) = 0.621 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.909 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

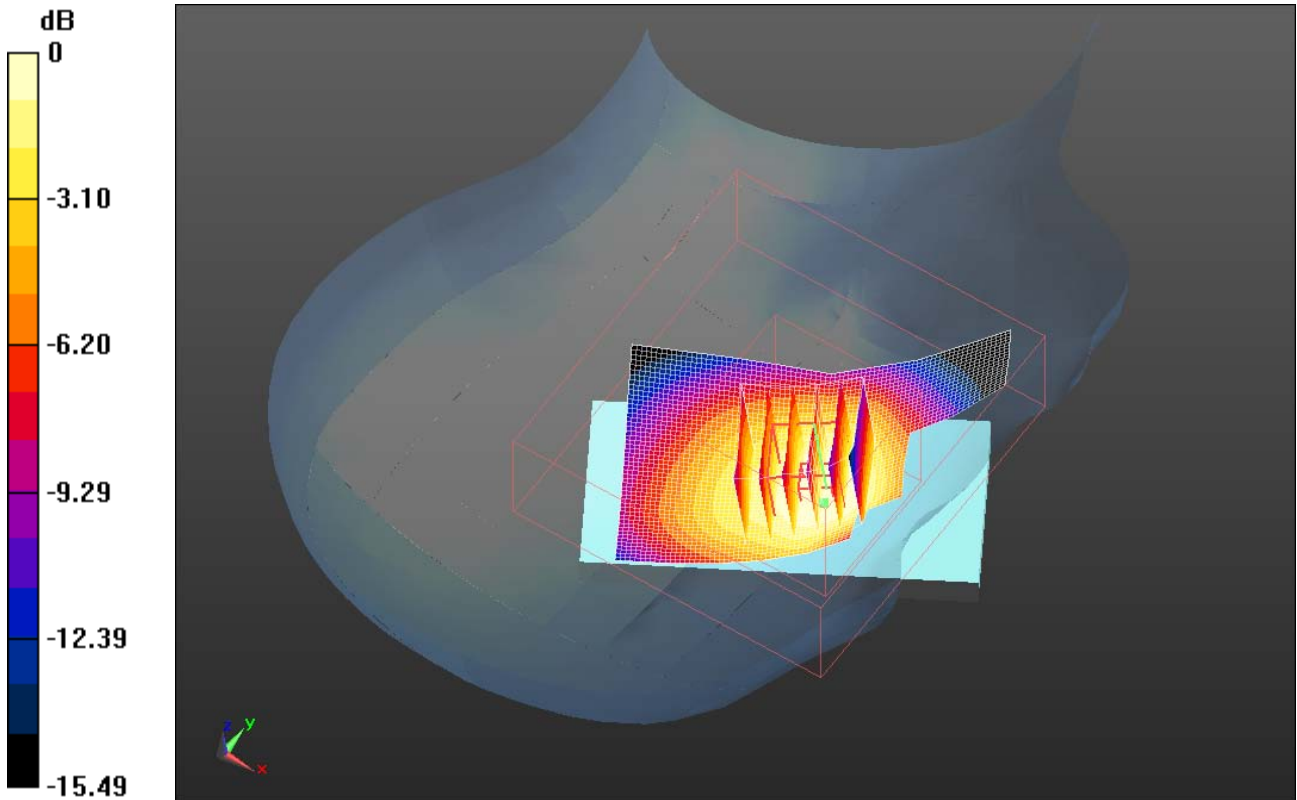

0 dB = 0.910mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 83(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/21/2011 7:07:12 PM, Date/Time: 4/21/2011 7:12:55 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_V_high_chan_amb_temp_23.1_liq_temp_2 2.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD V; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 39.893$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.811 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.010 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.960 W/kg

SAR(1 g) = 0.754 mW/g; SAR(10 g) = 0.548 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.788 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

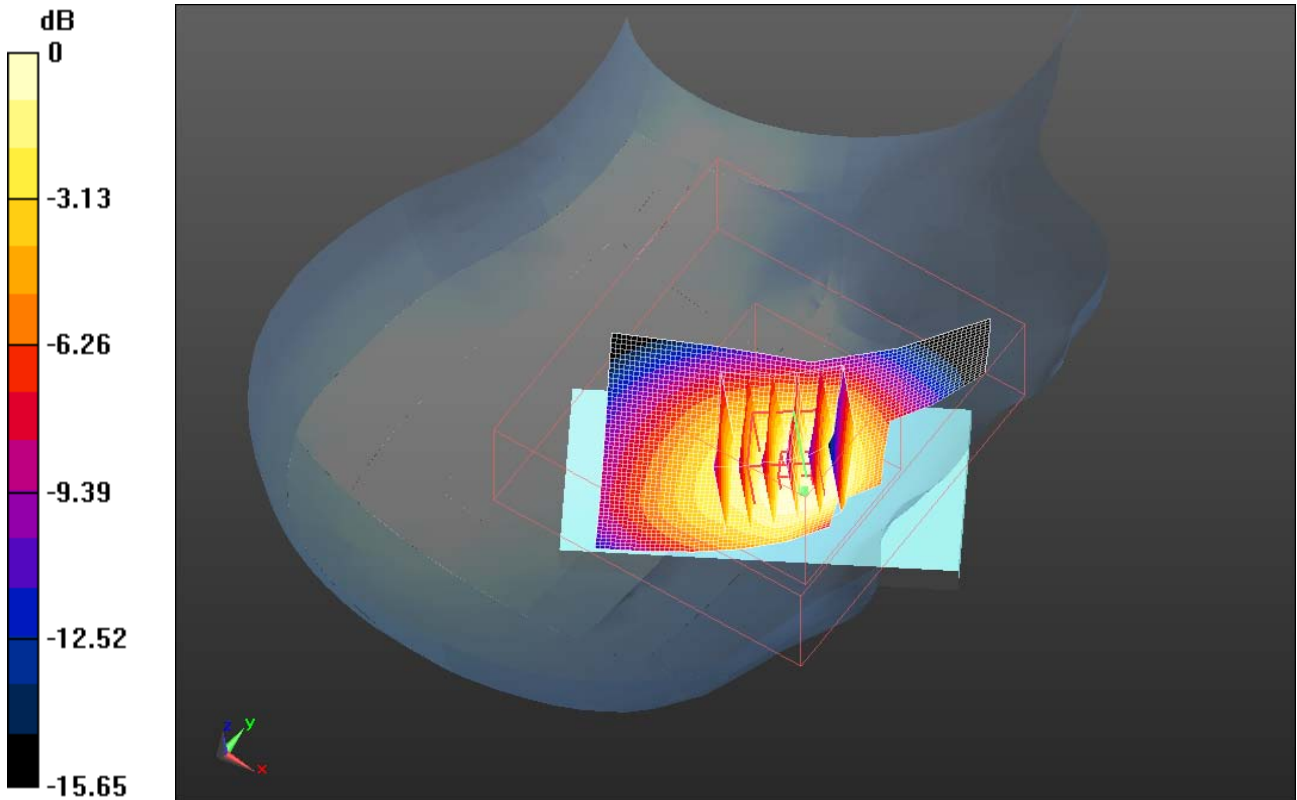

0 dB = 0.790mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 85(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/21/2011 7:23:59 PM, Date/Time: 4/21/2011 7:29:19 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_UMTS_band_V_mid_chan_amb_temp_23.1_liq_tem
p_22.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.055$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.549 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.652 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.379 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.549 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

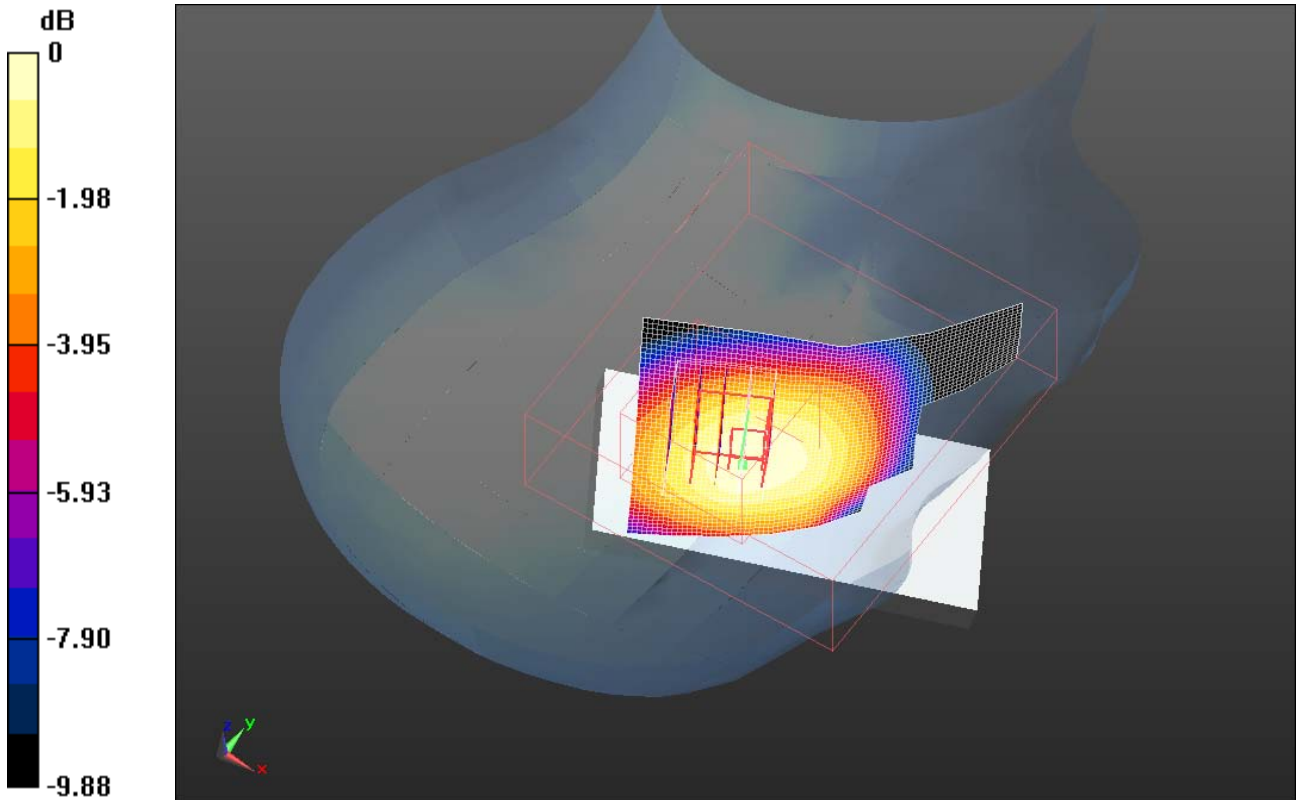

0 dB = 0.550mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 87(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/21/2011 7:59:39 PM, Date/Time: 4/21/2011 8:05:26 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UTMS_band_V_low_chan_amb_temp_23.8_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.866$ mho/m; $\epsilon_r = 40.109$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.800 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.456 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.079 W/kg

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.502 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.782 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

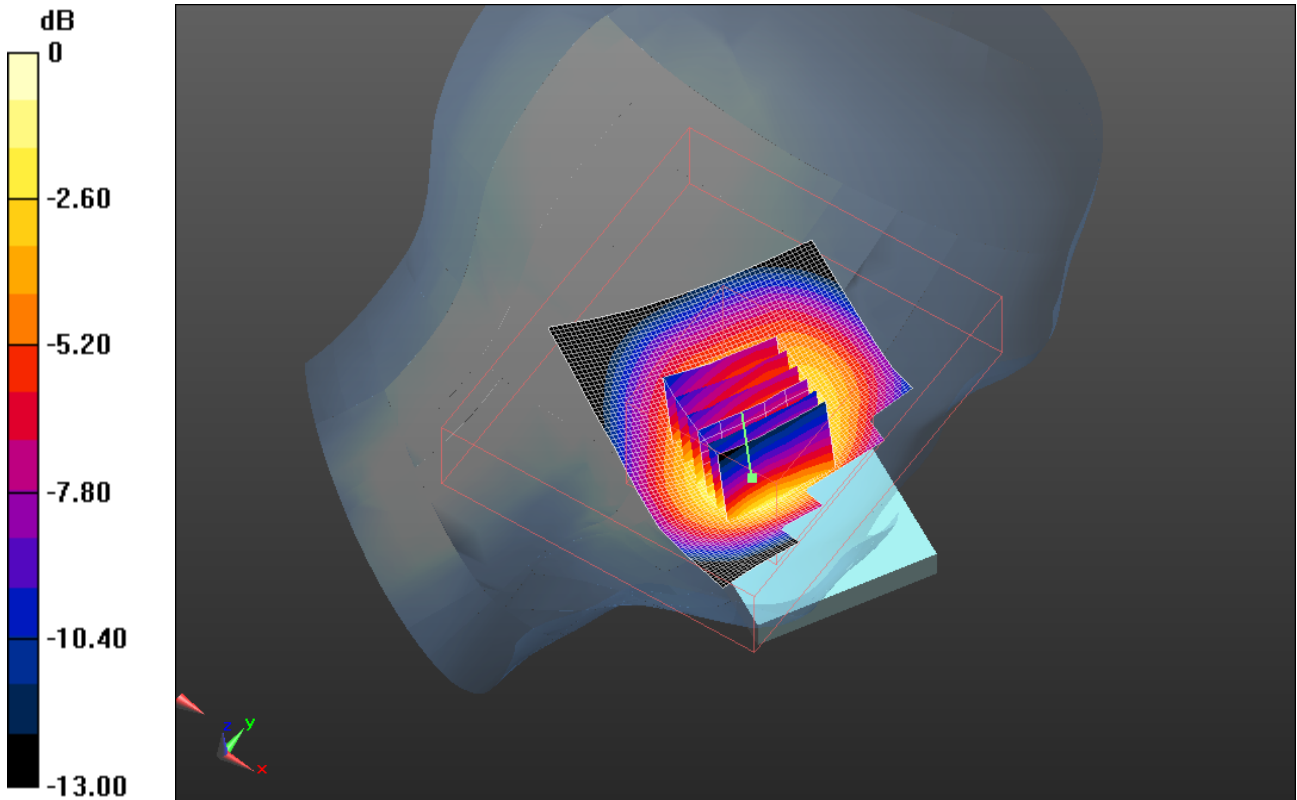

0 dB = 0.780mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 89(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/21/2011 7:43:40 PM, Date/Time: 4/21/2011 7:49:27 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UTMS_band_V_mid_chan_amb_temp_24.1_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.055$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.033 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.765 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 1.391 W/kg

SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.634 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.989 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

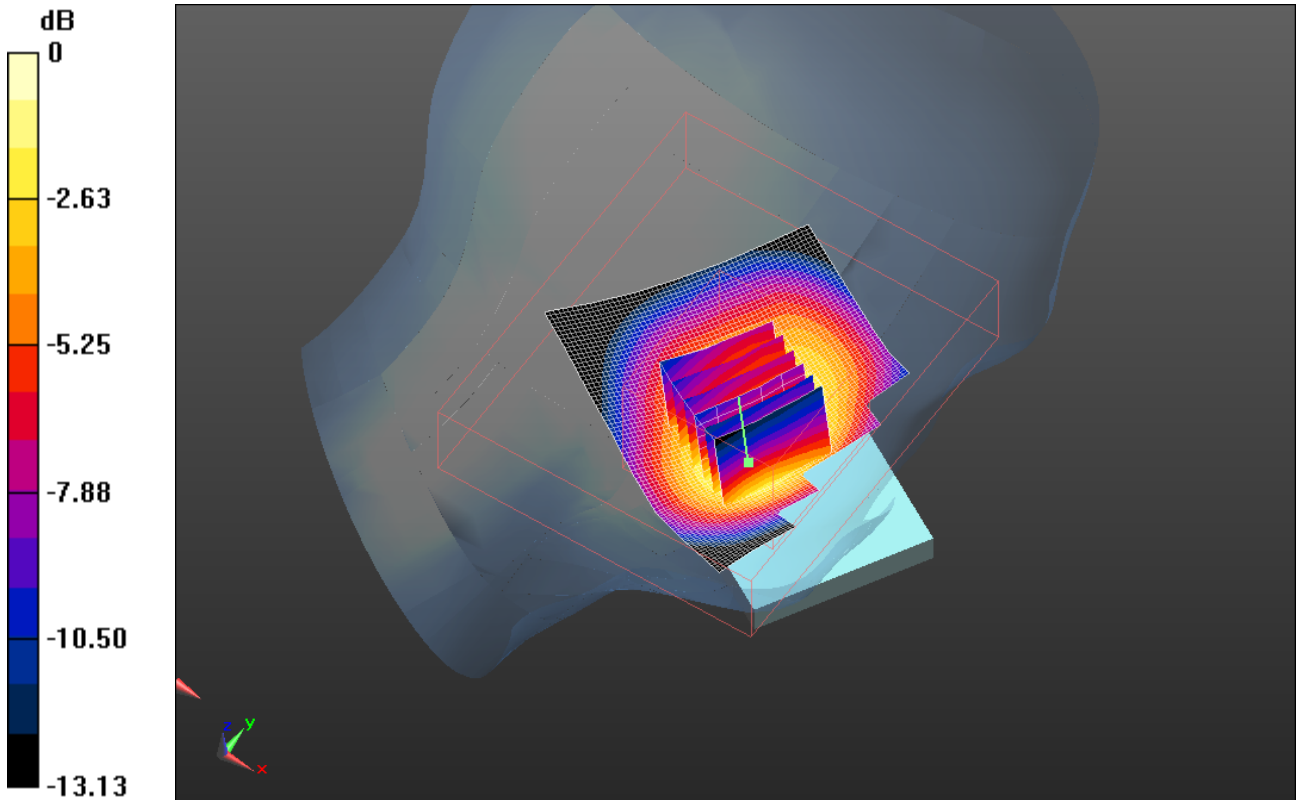

0 dB = 0.990mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 91(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/21/2011 8:15:42 PM, Date/Time: 4/21/2011 8:21:29 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UTMS_band_V_high_chan_amb_temp_23.8_liq_temp_22 .2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD V; Frequency: 846.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 39.893$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.47, 6.47, 6.47); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.886 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.873 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.202 W/kg

SAR(1 g) = 0.803 mW/g; SAR(10 g) = 0.551 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.860 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 92(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

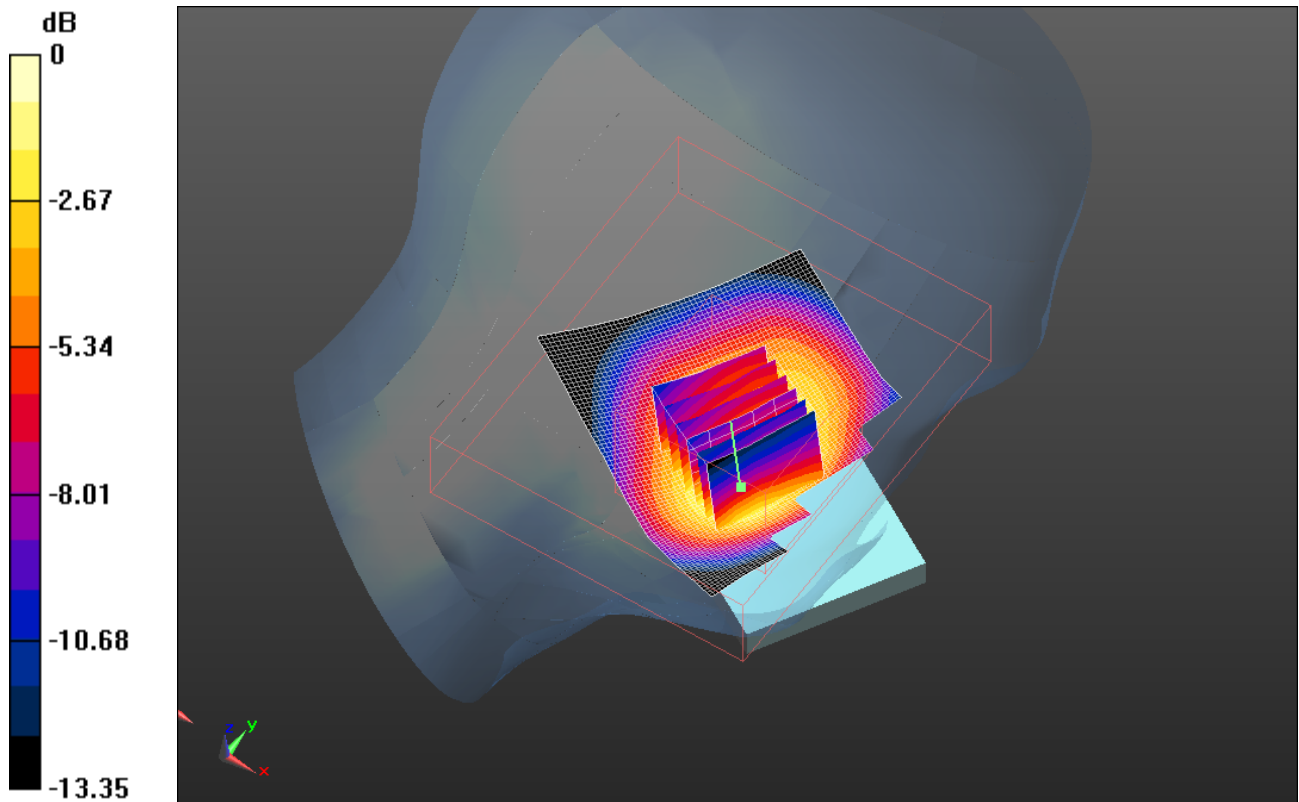

0 dB = 0.860mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 93(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/19/2011 4:34:55 PM, Date/Time: 4/19/2011 4:29:36 PM, Date/Time: 4/19/2011 4:43:47 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_II_mid_chan_amb_temp_23.2_liq_temp_2

2.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.204 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 0.903 W/kg
SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.356 mW/g
Maximum value of SAR (measured) = 0.617 mW/g

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:


dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.663 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) 2 (8x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.204 V/m; Power Drift = -0.27 dB

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 94(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Peak SAR (extrapolated) = 0.880 W/kg
 SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.357 mW/g
 Maximum value of SAR (measured) = 0.625 mW/g

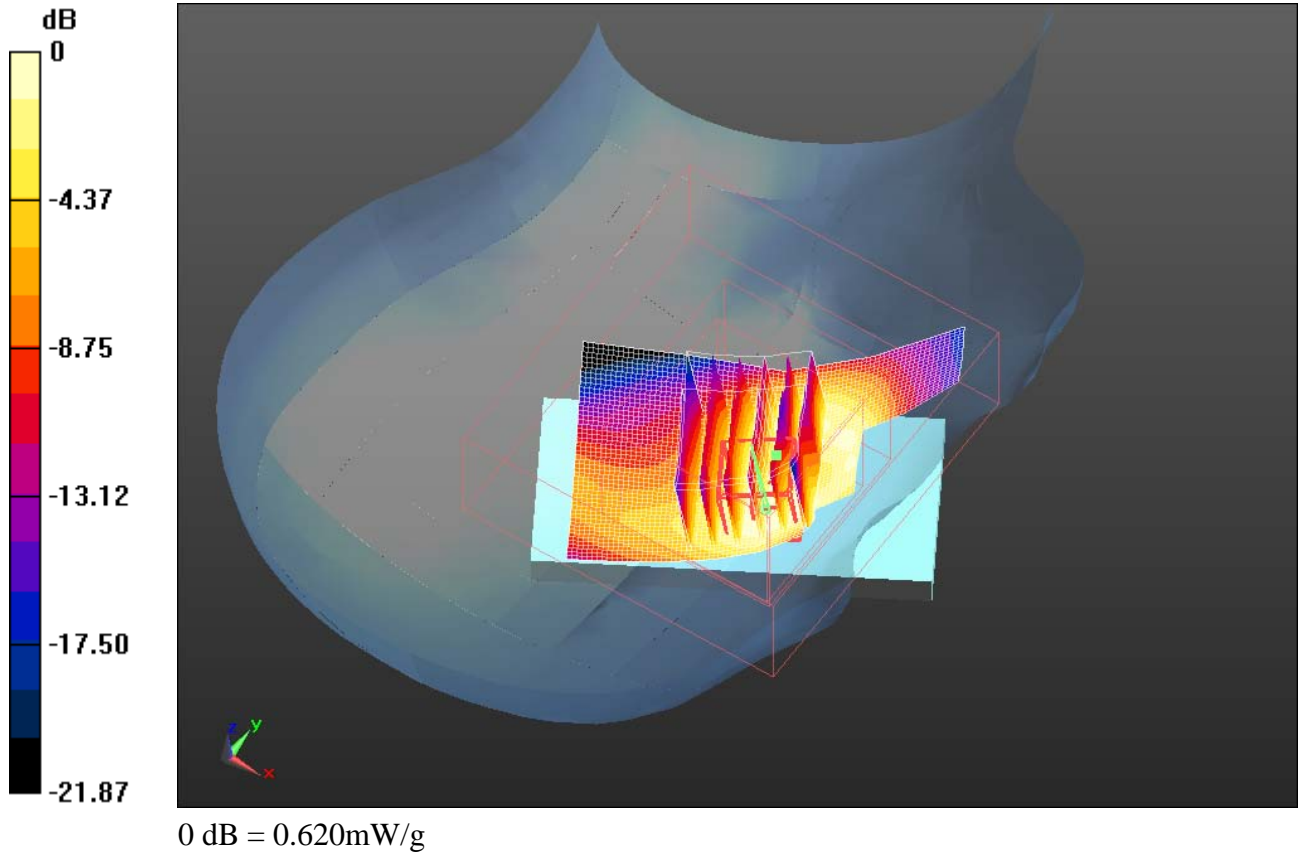

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 95(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/19/2011 4:59:19 PM, Date/Time: 4/19/2011 5:04:31 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_UMTS_band_II_mid_chan_amb_temp_23.4_liq_tem
p_22.3C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS5, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.340 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.218 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 0.322 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

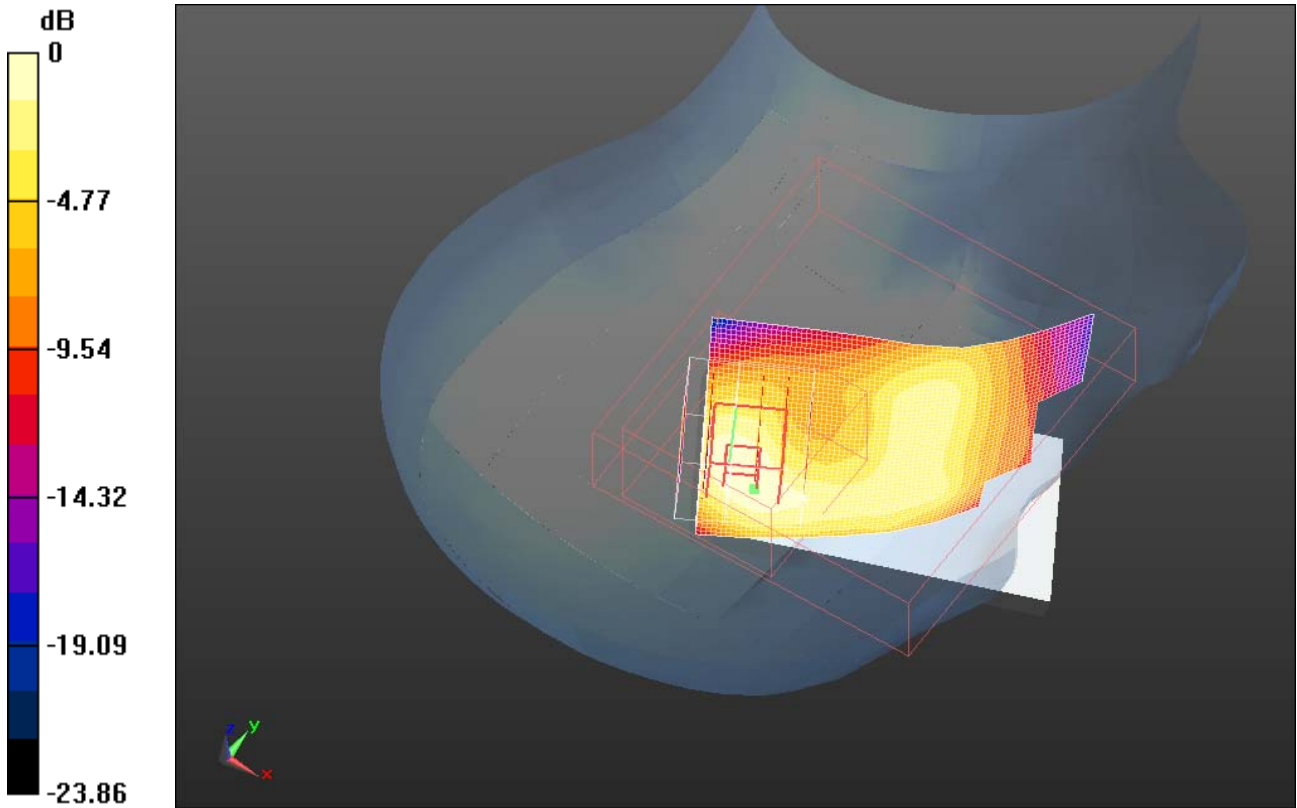

0 dB = 0.320mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 97(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/19/2011 3:02:31 PM, Date/Time: 4/19/2011 3:07:30 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_low_chan_amb_temp_23.2_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.305$ mho/m; $\epsilon_r = 38.349$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.854 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.548 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 1.293 W/kg

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.464 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.911 mW/g


Author Data
Andrew Becker

Dates of Test
Apr 13 – July 11, 2011


Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

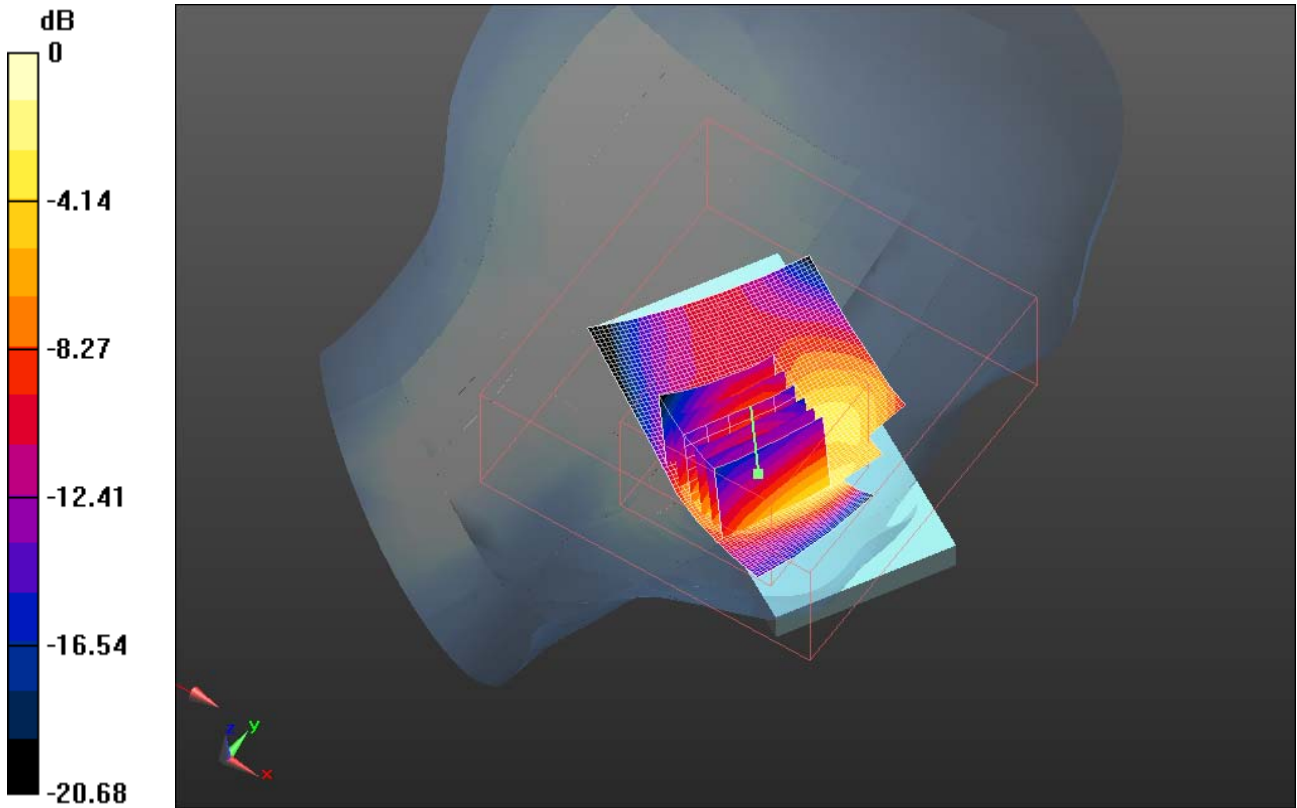

0 dB = 0.910mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 99(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/19/2011 2:45:32 PM, Date/Time: 4/19/2011 2:50:33 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_mid_chan_amb_temp_23.1_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.942 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.298 V/m; Power Drift = -0.22 dB

Peak SAR (extrapolated) = 1.464 W/kg

SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 1.013 mW/g


Author Data
Andrew Becker


Dates of Test
Apr 13 – July 11, 2011

Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

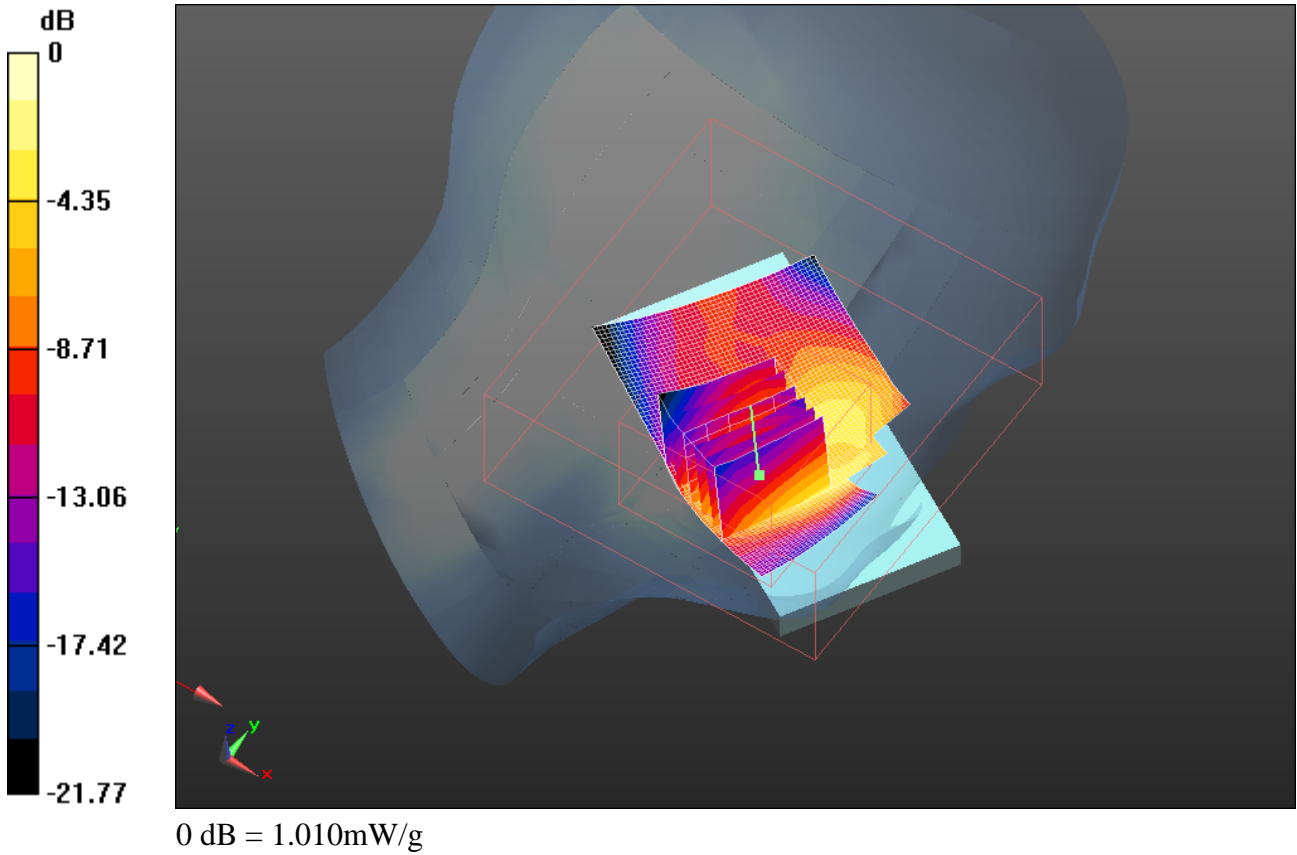

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 101(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Date/Time: 4/19/2011 3:27:18 PM, Date/Time: 4/19/2011 3:32:17 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_high_chan_amb_temp_23.4_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.395$ mho/m; $\epsilon_r = 38.198$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.949 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.291 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.524 W/kg

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.526 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.048 mW/g


Author Data
Andrew Becker


Dates of Test
Apr 13 – July 11, 2011

Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

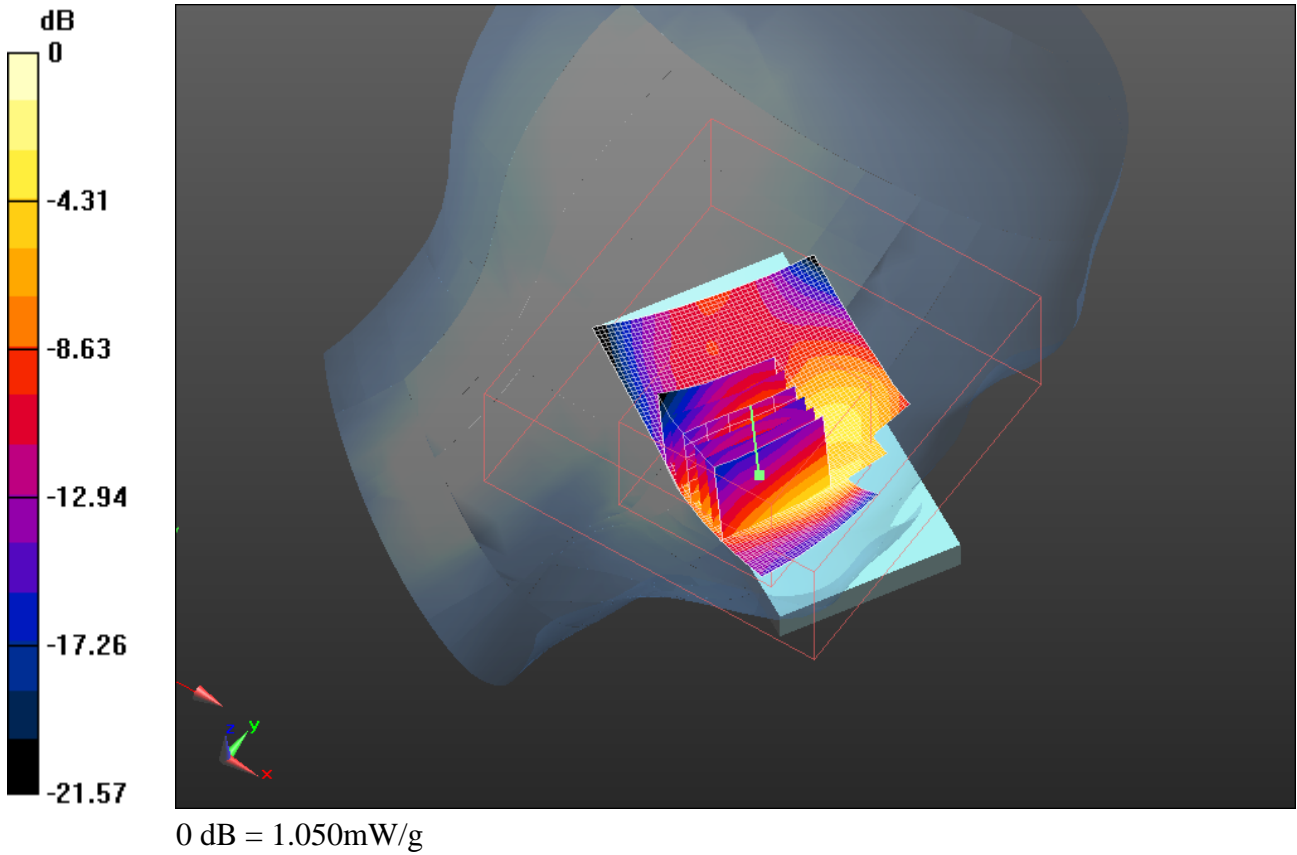

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			103(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	Apr 13 – July 11, 2011	RTS-2579-1106-34B	L6ARDX70UW	2503A-RDX70UW

Date/Time: 4/19/2011 3:54:17 PM, Date/Time: 4/19/2011 3:59:24 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_UMTS_band_II_mid_chan_amb_temp_23.2_liq_temp _22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2727119F

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.344$ mho/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (51x81x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.321 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.609 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.326 mW/g


Author Data
Andrew Becker


Dates of Test
Apr 13 – July 11, 2011

Test Report No
RTS-2579-1106-34B

FCC ID:
L6ARDX70UW

IC ID
2503A-RDX70UW

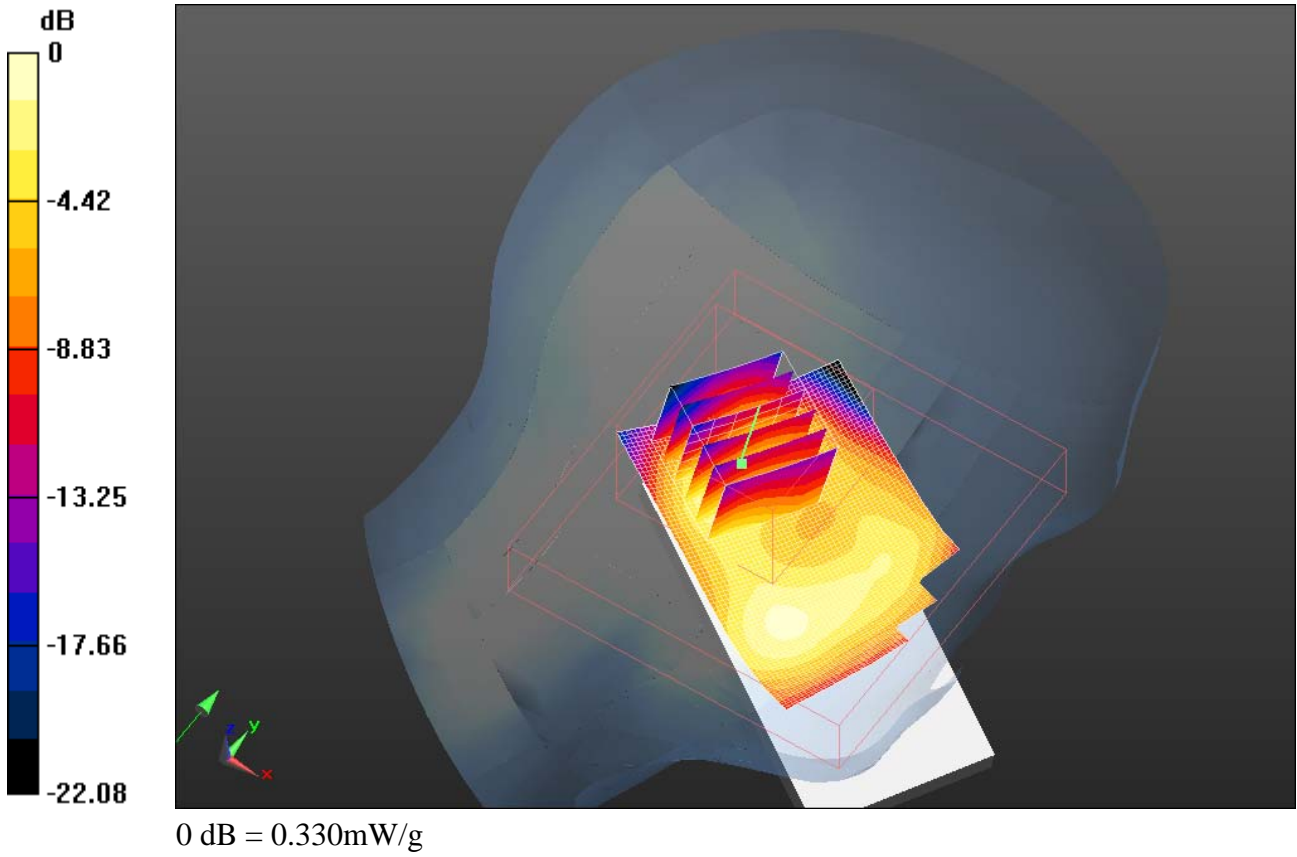

	Document Appendix B for the BlackBerry® Smartphone Model RDD71UW/RDX71UW SAR Report			Page 105(105)
	Author Data Andrew Becker	Dates of Test Apr 13 – July 11, 2011	Test Report No RTS-2579-1106-34B	FCC ID: L6ARDX70UW

Z axis plot for the worst case head configuration:

