

FCC DFS Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 15.407
&
Industry Canada (IC), RSS-210




A division of Research In Motion Limited

REPORT NO.: RTS-5955-1110-34

PRODUCT MODEL NO.: REP71UW, REQ71UW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6AREP70UW, L6AREQ70UW
IC: 2503A-REP70UW, 2503A-REQ70UW

DATE: October 19, 2011

	DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW		
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW FCC ID: L6AREQ70UW	IC : 2503A-REP70UW IC : 2503A-REQ70UW

Statement of Performance:

The BlackBerry® smartphone, model REP71UW, part number CER-41255-001 Rev. 1 and accessories when configured and operated per RIM's operation instructions, and performs within the requirements of the test standards.

The BlackBerry® smartphone, model REQ71UW, part number CER-41254-001 Rev. 1 and accessories when configured and operated per RIM's operation instructions, and performs within the requirements of the test standards.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:



Heng Lin
Regulatory Compliance Specialist
Date: October 19, 2011

Reviewed by:



Shuo Wang
Regulatory Compliance Specialist
Date: October 20, 2011

Reviewed and Approved by:



Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance
Date: October 21, 2011



	DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW		
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW FCC ID: L6AREQ70UW	IC : 2503A-REP70UW IC : 2503A-REQ70UW

Table of Contents

A.	Scope	4
B.	Associated Documents.....	4
C.	Product Identification.....	4
D.	Support Equipment Used for the Testing of the EUT	5
E.	Test Results Chart – FCC Part 15, Client Device.....	6
F.	Summary of Result.....	6
G.	Compliance Test Equipment Used.....	7
APPENDIX 1 - DFS TEST PLOTS and DATA		8

	DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW		
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW FCC ID: L6AREQ70UW	IC : 2503A-REP70UW IC : 2503A-REQ70UW

A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15.407, October, 2010
- Industry Canada, RSS-210, Issue 8, December 2010, Licence-exempt Radio Apparatus

B. Associated Documents

- 1) BlackBerrySystemSimilarity_REP71UW_REQ71UW

C. Product Identification


Manufactured by Research In Motion Limited whose headquarters is located at:

295 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services
440 Phillip Street
Waterloo, Ontario
Canada, N2L 5R9
Phone: 519 888 7465
Fax: 519 888 6906

The testing was performed on September 29, 2011.

		DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW	
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW FCC ID: L6AREQ70UW	IC : 2503A-REP70UW IC : 2503A-REQ70UW

BlackBerry® smartphone Samples Tested

SAMPLE	MODEL	CER NUMBER	PIN	Software
1	REQ71UW	CER-41254-001 Rev 1	2840333F	V7.0.0.444, Platform: 5.0.0.617 Bundle 1970

DFS testing was performed on sample 1.

The differences between the model REP71UW and REQ71UW is outlined in detail in document BlackBerrySystemSimilarity_REP71UW_REQ71UW.

The manufacturer declared modes for the EUT operational characteristics that affect DFS are as follows:

Operating Modes (5250 -5350 MHz, 5470-5725MHz)


- Master Device
- Client Device (no In Service Monitoring, no Ad – Hoc mode)
- Client Device with In-Service Monitoring

Channel Protocol

- IP Based
- Frame Based
- Other _____

D. Support Equipment Used for the Testing of the EUT

Manufacturer	Description	Model	Serial Number	FCC ID and IC ID
Cisco	Access Point	AIR-RM1252G-A-K9	FCW1336Z03R	LDK102061/2 2461B-102061/2
Lenovo	Laptop	8742-C2U	L3-B3615 07/06	MCLJ07H081 2878D-J07H081
D-Link	Router	WBR-1310	P10317B010096	KA2WBR1310 4216A-WBR1310

		DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW	
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW FCC ID: L6AREQ70UW	IC : 2503A-REP70UW IC : 2503A-REQ70UW

E. Test Results Chart – FCC Part 15, Client Device

SPECIFICATION		TEST TYPE	Meets Requirement	Test Data APPENDIX
FCC CFR 47	IC			
Part 15.407	RSS-210	Channel closing transmission time	Yes	1
Part 15.407	RSS-210	Channel move time	Yes	1
Part 15.407	RSS-210	Non-occupancy period - associated	Yes	1


F. Summary of Result

- a). The BlackBerry® smartphone met the requirement of the Channel Closing Transmission and Time, Channel Move time and Non-occupancy period requirement as per FCC 15.407 and RSS 210. The measurement was performed on Channel 60 (5300 MHz) of the DFS band. Radar Type 1 of the Short Pulse Test waveform was used for tests.

See APPENDIX 1 for the test data.


Measurement Uncertainties:

Measurement	Measurement Unit	Expanded Uncertainty
DFS Threshold (Conducted)	dBm	1.2


		DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW			
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW	IC : 2503A-REP70UW	FCC ID: L6AREQ70UW	IC : 2503A-REQ70UW

G. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE (YY MM DD)</u>	<u>USE</u>
Spectrum Analyzer	Rohde & Schwarz	FSV	101820	11-11-22	DFS
DFS RF Modulator	National Instruments	PXIe-5611	EC157C	11-12-11	DFS
DFS I/Q Signal Generator	National Instruments	PXIe-5450	EC6BB1	11-12-11	DFS
DFS RF Signal Generator	National Instruments	PXIe-5620	ED2167	11-12-11	DFS
T/RH Meter	OMEGA	iTHX-SD	0380564	11-10-13	DFS

	DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW APPENDIX 1		
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW FCC ID: L6AREQ70UW	IC : 2503A-REP70UW IC : 2503A-REQ70UW


APPENDIX 1 - DFS TEST PLOTS and DATA

	DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW APPENDIX 1		
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW IC : 2503A-REP70UW FCC ID: L6AREQ70UW IC : 2503A-REQ70UW	


DFS Conducted Test Results

DFS Test Methods

Conducted Test Method

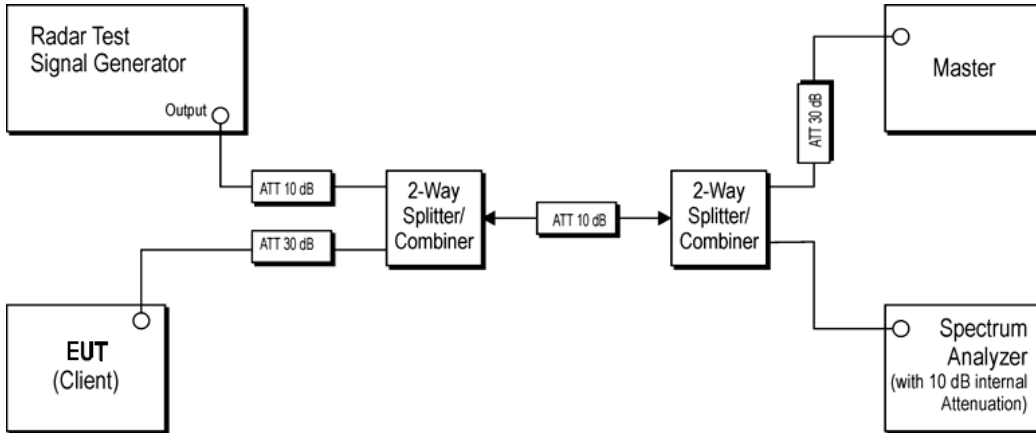

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the Channel Closing Transimission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel Move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.

		DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW APPENDIX 1	
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW FCC ID: L6AREQ70UW	IC : 2503A-REP70UW IC : 2503A-REQ70UW


DFS Conducted Test Results Cont'd

Radar Waveforms

FCC Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Detection Percentage	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

FCC Long Pulse Radar Test Waveforms							
Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µs)	Number of Pulses per Burst	Number of Bursts	Minimum Detection Percentage	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Frequency Hopping Radar Test Waveforms							
Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Detection Percentage	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

		DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW APPENDIX 1	
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW IC : 2503A-REP70UW FCC ID: L6AREQ70UW IC : 2503A-REQ70UW	

DFS Conducted Test Results Cont'd

The test was measured for model REQ71UW.


The following tests were performed by Heng Lin

Date of the test: September 29, 2011

The environmental conditions were: Temperature: 24.8 °C
 Humidity: 34.6 %


Wave form Type	Channel Closing Transmission Time		Channel Move Time		Result
	Measured	Limit	Measured	Limit	
Radar Type 1	69.57 ms	260 ms	0.504 s	10 s	PASS

Channel Closing Transmission Time

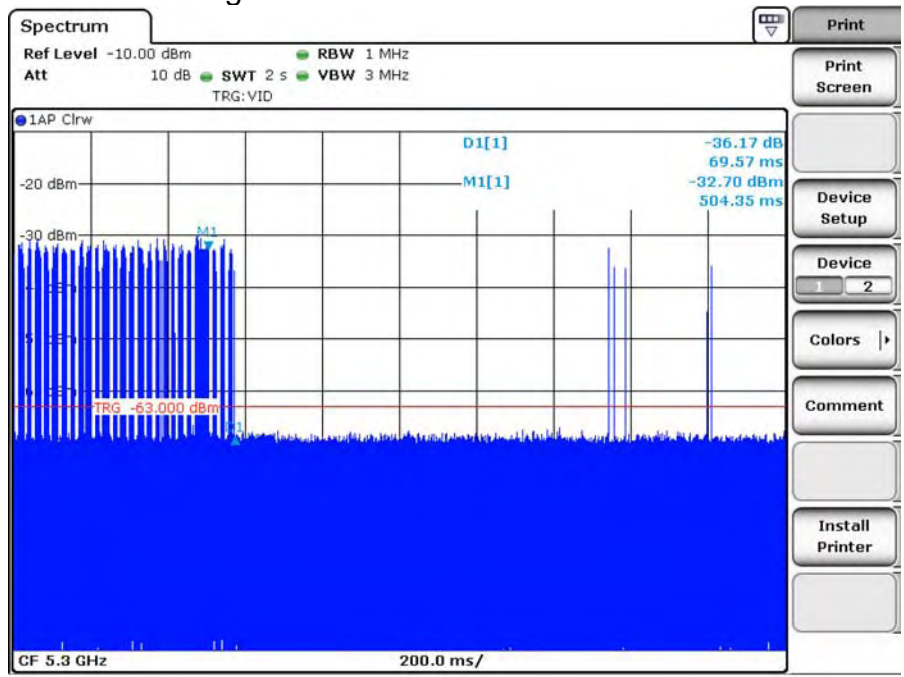



DFS Conducted Test Results Cont'd

Channel Move Time

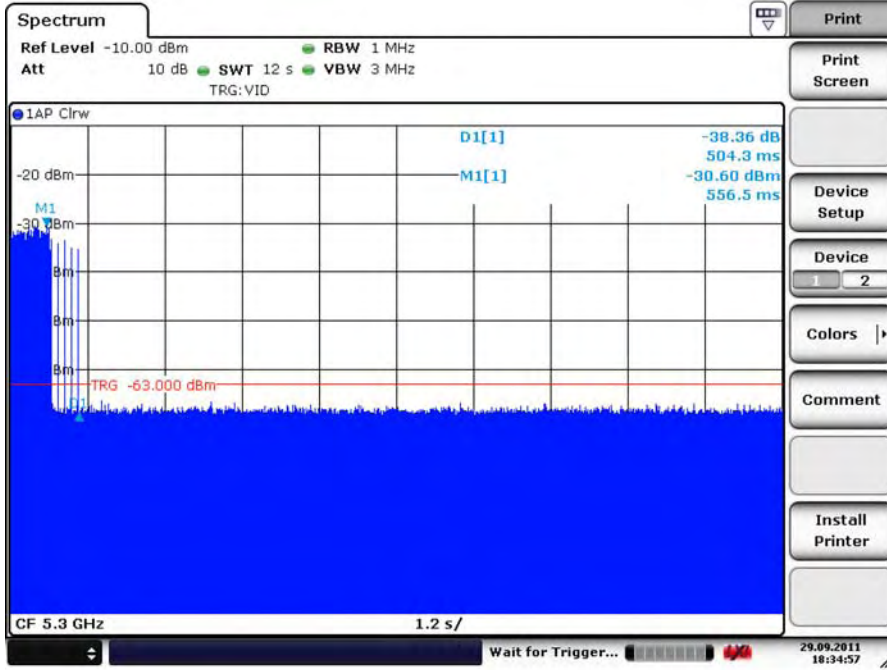

Non-Occupancy Period ≥ 30 min.

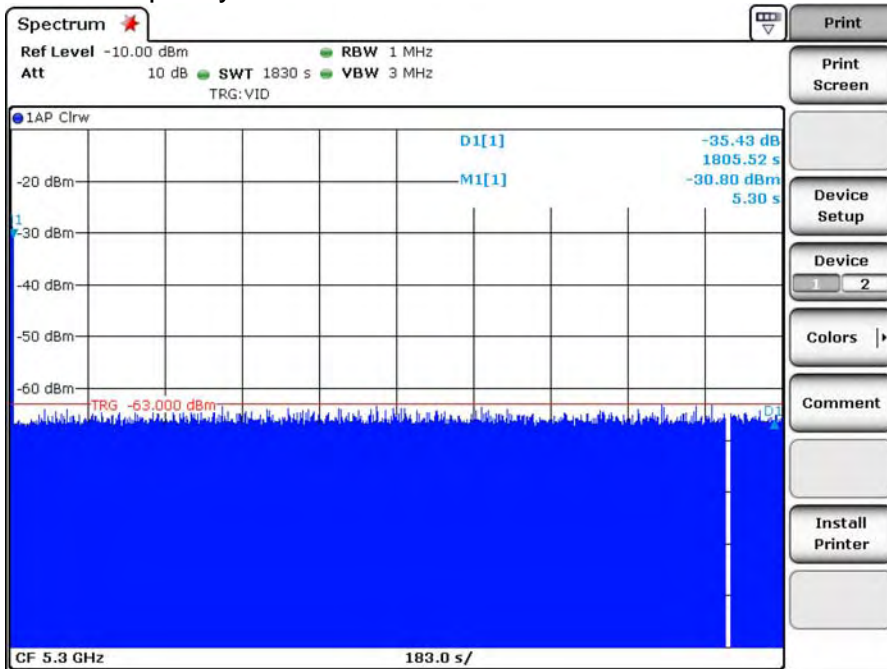

	DFS Test Report for the BlackBerry® smartphone Model REP71UW, REQ71UW APPENDIX 1		
Test Report No. RTS-5955-1110-34	Date of Test September 29, 2011	FCC ID: L6AREP70UW IC : 2503A-REP70UW FCC ID: L6AREQ70UW IC : 2503A-REQ70UW	

DFS Test Setup Photo

