
	Document			Page
	Appendix A for the BlackBerry® Smartphone Model RFD31CW SAR Report			1(5)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	February 23 – March 19, 2012	RTS-5994-1203-78	L6ARFD30CW	2503A-RFD30CW

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION

	Document			Page
	Appendix A for the BlackBerry® Smartphone Model RFD31CW SAR Report			2(5)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	February 23 – March 19, 2012	RTS-5994-1203-78	L6ARFD30CW	2503A-RFD30CW

Date/Time: 3/16/2012 11:06:46 AM

Test Laboratory: RIM Testing Services

DipoleValidation_835MHz_03_16_12_Amb_Tem_22.0_Liq_Tem_21.2C

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 39.884$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/d=15mm, Pin=1000mW/Area Scan (31x121x1): Measurement

grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 10.957 mW/g

Configuration/d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 2


(5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 114.2 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 13.6490

SAR(1 g) = 9.24 mW/g; SAR(10 g) = 6.05 mW/g

Maximum value of SAR (measured) = 10.860 mW/g

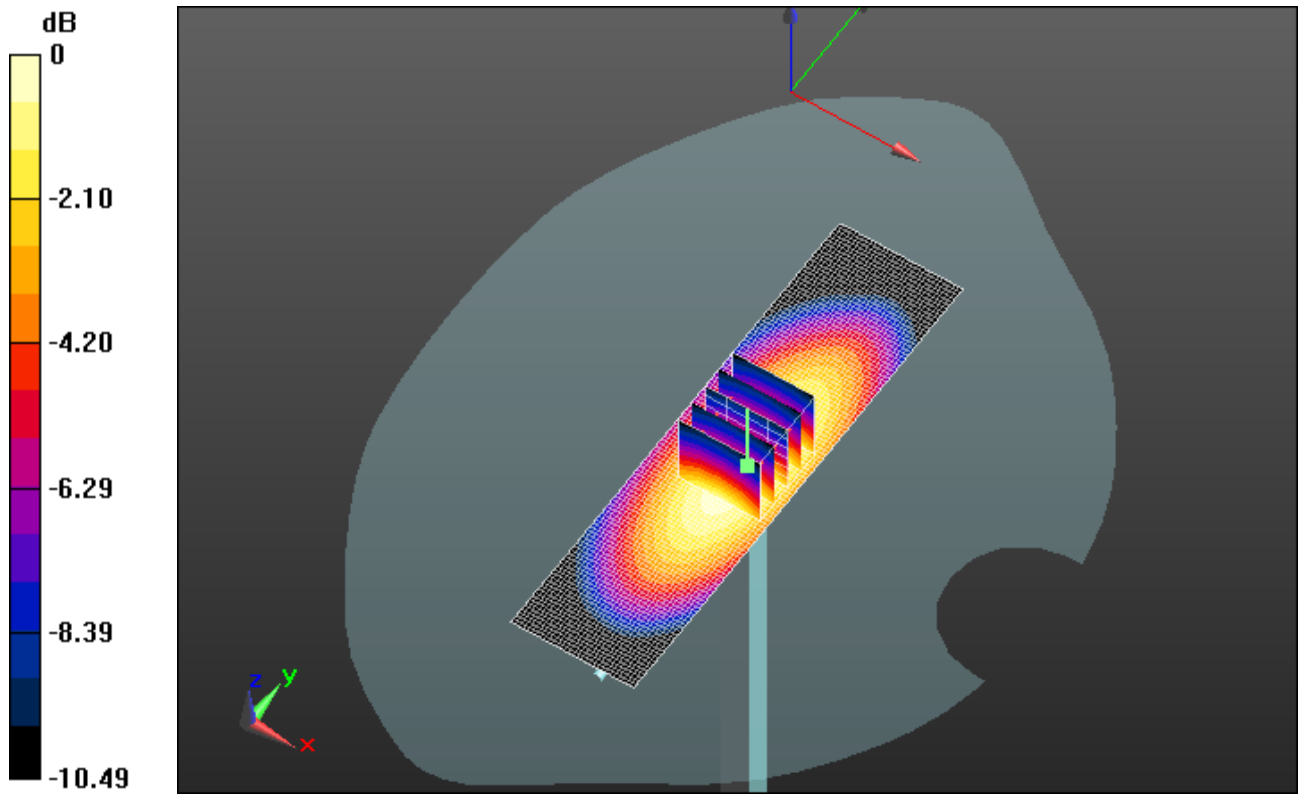

0 dB = 10.860mW/g = 20.72 dB mW/g

	Document			Page
	Appendix A for the BlackBerry® Smartphone Model RFD31CW SAR Report			4(5)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	February 23 – March 19, 2012	RTS-5994-1203-78	L6ARFD30CW	2503A-RFD30CW

Date/Time: 3/19/2012 9:49:37 AM

Test Laboratory: RIM Testing Services

DipoleValidation_835MHz_03_19_12_Amb_Tem_22.2_Liq_Tem_21.3C

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.122$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/d=15mm, Pin=1000mW/Area Scan (31x121x1): Measurement

grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 10.972 mW/g

Configuration/d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 2

(5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 114.4 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 13.7110

SAR(1 g) = 9.28 mW/g; SAR(10 g) = 6.07 mW/g

Maximum value of SAR (measured) = 10.846 mW/g



Author Data
Andrew Becker

Dates of Test
February 23 – March 19, 2012

Test Report No
RTS-5994-1203-78

FCC ID:
L6ARFD30CW

IC ID
2503A-RFD30CW

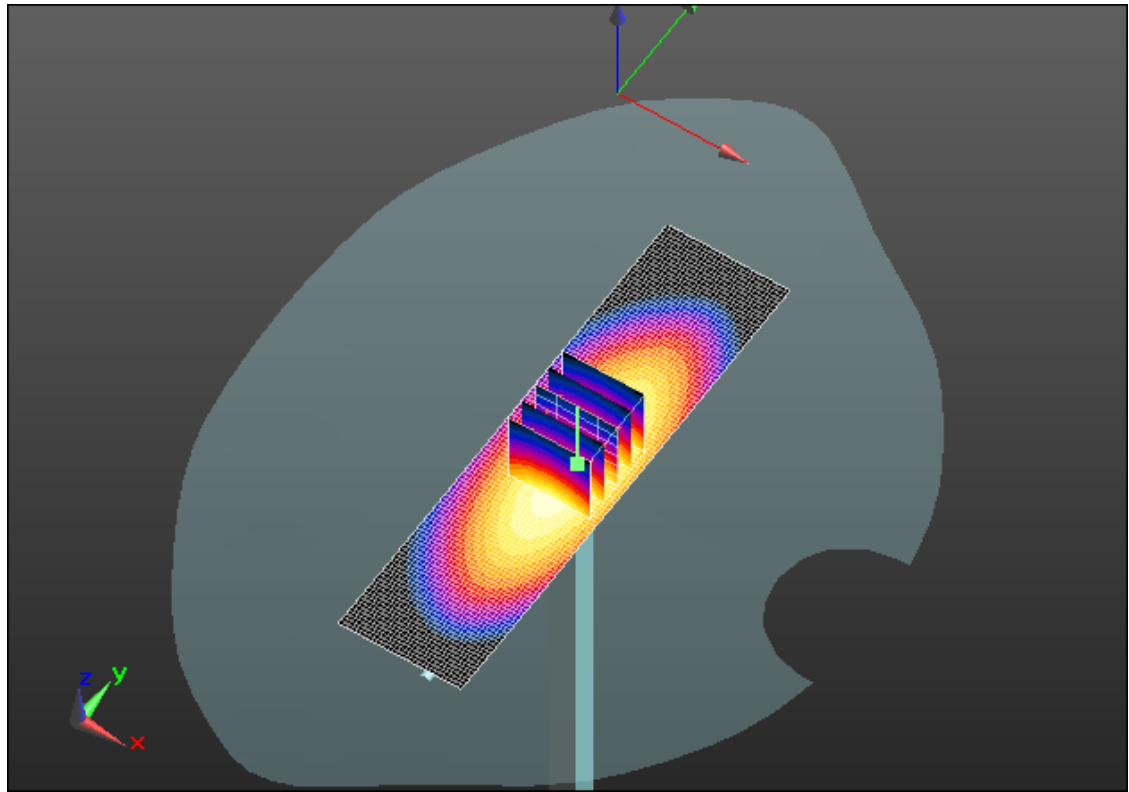

0 dB = 10.850mW/g = 20.71 dB mW/g