	Document		Page	
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		<b>1(50)</b>	
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30 , 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

## SAR Compliance Test Report

<b>Testing Lab:</b>	RIM Testing Services 440 Phillip Street Waterloo, Ontario Canada N2L 5R9 Phone: 519-888-7465 Fax: 519-746-0189	<b>Applicant:</b>	Research In Motion Limited 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.rim.com
---------------------	---	-------------------	--

**Statement of Compliance:** RIM Testing Services declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

**Device Category:** This BlackBerry® Smartphone is a portable device, designed to be used in direct contact with the user's head, hand and to be carried in approved accessories when carried on the user's body.

**RF exposure environment:** This device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in OET Bulletin 65 Supplement C (Edition 01-01), FCC 96-326, IEEE Std. C95.1-2005, Health Canada's Safety Code 6, as reproduced in RSS-102 issue 4-2010 and has been tested in accordance with the measurement procedures specified in FCC OET Procedures, OET Bulletin 65 Supplement C (Edition 01-01), ANSI/IEEE Std. C95.3-2002, IEEE 1528-2003, IEC 62209-1-2005, IEC 62209 - 2-2010 and Health Canada's Safety Code 6.

---

Andrew Becker  
SAR & HAC Compliance Specialist  
(Author of the Test Report)

---

Daoud Attayi  
Team Lead: Safety, SAR & HAC Compliance  
(Verification and responsible of the Test Report)


---

Masud S. Attayi  
Manager, Regulatory Compliance  
(Approval for the Test Report)

**RTS is accredited  
according to  
EN ISO/IEC 17025 by:**




**592**

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>		Page <b>2(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>
			IC ID <b>2503A-RFE70UW</b>

## CONTENTS

1.0	OPERATING CONFIGURATIONS AND TEST CONDITIONS.....	4
1.1	PICTURE OF DEVICE .....	4
1.2	ANTENNA DESCRIPTION .....	4
1.3	DEVICE DESCRIPTION.....	4
1.4	BODY WORN ACCESSORIES (HOLSTERS).....	6
1.5	HEADSET.....	6
1.6	BATTERY .....	6
1.7	PROCEDURE USED TO ESTABLISH TEST SIGNAL.....	6
1.8	HIGHLIGHTS OF THE FCC OET SAR MEASUREMENT REQUIREMENTS .....	7
1.8.1	SAR MEASUREMENT PROCEDURES FOR 802.11 B/G/N TRANSMITTER.....	7
1.8.2	SAR MEASUREMENT REQUIREMENTS FOR BLUETOOTH .....	10
1.8.3	SAR MEASUREMENT PROCEDURES FOR 3G DEVICES .....	10
1.8.4	SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES .....	13
1.9	HIGHLIGHTS OF THE FCC OET SAR EVALUATION CONSIDERATIONS FOR HANDSETS WITH MULTIPLE TRANSMITTERS/ ANTENNAS & GSM/GPRS/EDGE PROCEDURE .....	14
1.9.1	SIMULTANEOUS TRANSMISSION ANALYSIS.....	15
2.0	DESCRIPTION OF THE TEST EQUIPMENT.....	21
2.1	SAR MEASUREMENT SYSTEM.....	21
2.1.1	EQUIPMENT LIST .....	22
2.2	DESCRIPTION OF THE TEST SETUP.....	23
2.2.1	DEVICE AND BASE STATION SIMULATOR SETUP .....	23
2.2.2	DASY SETUP .....	23
3.0	ELECTRIC FIELD PROBE CALIBRATION.....	23
3.1	PROBE SPECIFICATIONS.....	23
3.2	PROBE CALIBRATION AND MEASUREMENT UNCERTAINTY.....	24
4.0	SAR MEASUREMENT SYSTEM VERIFICATION .....	25
4.1	SYSTEM ACCURACY VERIFICATION FOR HEAD ADJACENT USE.....	25
5.0	PHANTOM DESCRIPTION.....	26
6.0	TISSUE DIELECTRIC PROPERTIES .....	27
6.1	COMPOSITION OF TISSUE SIMULANT.....	27
6.1.1	EQUIPMENT .....	27
6.1.2	PREPARATION PROCEDURE.....	28
6.2	ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID .....	28
6.2.2	TEST CONFIGURATION.....	30
6.2.3	PROCEDURE.....	30
7.0	SAR SAFETY LIMITS .....	31
8.0	DEVICE POSITIONING.....	32
8.1	DEVICE HOLDER FOR SAM TWIN PHANTOM.....	32
8.2	DESCRIPTION OF THE TEST POSITIONING.....	33
8.2.1	TEST POSITIONS OF DEVICE RELATIVE TO HEAD .....	33
8.2.1.1	DEFINITION OF THE “CHEEK” POSITION .....	34
8.2.1.2	DEFINITION OF THE “TILTED” POSITION .....	35
8.2.2	BODY-WORN CONFIGURATION.....	35
8.2.3	LIMB/HAND CONFIGURATION.....	35
9.0	HIGH LEVEL EVALUATION.....	36
9.1	MAXIMUM SEARCH .....	36
9.2	EXTRAPOLATION .....	36
9.3	BOUNDARY CORRECTION .....	36
9.4	PEAK SEARCH FOR 1G AND 10G CUBE AVERAGED SAR .....	36
10.0	MEASUREMENT UNCERTAINTY.....	37
11.0	TEST RESULTS.....	38
11.1	SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE HEAD .....	38
11.2	SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE BODY USING ACCESSORIES.....	42
12.0	REFERENCES .....	49

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>3(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION


APPENDIX B:: SAR DISTRIBUTION PLOTS - HEAD CONFIGURATION

APPENDIX C1: SAR DISTRIBUTION PLOTS - BODY-WORN CONFIGURATION

APPENDIX C2: SAR DISTRIBUTION PLOTS - MOBILE HOT SPOT

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

APPENDIX E: PHOTOGRAPHS

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>4(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

## 1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

### 1.1 Picture of Device

Please refer to Appendix E.  
**Figure 1.1.1 BlackBerry Smartphone**


### 1.2 Antenna description

<b>Type</b>	Internal fixed antenna
<b>Location</b>	Back bottom centre (main licensed transmitters)
<b>Configuration</b>	Internal fixed antenna

**Table 1.2.1. Antenna description**

### 1.3 Device description


<b>Device Model</b>	RFE71UW			
<b>FCC ID</b>	L6ARFE70UW			
<b>PIN</b>	Radiated: 2A2114F7 (Rev3), 2A41842F (Rev4) Conducted: 2A211570 (Rev3), 2A4183A0 (Rev4)			
<b>Hardware Rev</b>	Rev 3, Rev 4			
<b>Software Version</b>	7.1.0.557 Bundle 1695; 7.1.0.586 Bundle 1749; 7.1.0.621 Bundle 1827			
<b>Prototype or Production Unit</b>	Production			
<b>Mode(s) of Operation</b>	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	WCDMA / UMTS FDD V (850)	WCDMA / UMTS FDD IV (1700)
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	33.0 29.0	31.0 28.0	24.0	23.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:8	2:8	1:1	1:1
<b>Transmitting Frequency Range (MHz)</b>	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.6 – 846.6	1712.4-1752.6
<b>Mode(s) of Operation</b>	WCDMA / UMTS FDD II (1900)	802.11b	802.11g	802.11n
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	24.0	18.00	15.0	15.0
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:1	1:1	1:1	1:1
<b>Transmitting Frequency Range (MHz)</b>	1852.4 – 1907.6	2412-2462	2412-2462	2402-2483

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>5(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

<b>Mode(s) of Operation</b>	<b>Bluetooth</b>	<b>* NFC</b>		
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	10.3	N/A		
<b>Tolerance in Power Setting on centre channel (dB)</b>	N/A	N/A		
<b>Duty Cycle</b>	N/A	N/A		
<b>Transmitting Frequency Range (MHz)</b>	2402-2483	13.56		

**Table 1.3.1. Test device description**

\* SAR measurements on NFC haven't been conducted, since it is very low power and frequency magnetic field transceiver. SAR probes measure higher frequency/power electric field.

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>6(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

#### 1.4 Body worn accessories (holsters)

The device has been tested with the first holster listed below. The holsters have been designed with the intended device orientation being with the LCD facing the belt clip only. Proper positioning is vital for protection of the LCD display, and to help maximize the battery life of the device. The device can also be placed in the holster with the backside facing the belt clip. Body SAR measurements were carried out with the worst-case configuration front LCD side and backside towards the belt clip.

Number	Holster Type	Part Number	Separation distance (mm)
1	Holster, Black Leather	HDW-46595-001	20
2*	Holster, Black Leather Rev C	HDW-46595-001	22

**Table 1.4.1. Body worn holster**

\*Note: both holsters have identical design, except for different separation distances

Please refer to Appendix E.

**Figure 1.4.1. Body-worn holster**

#### 1.5 Headset

The device was tested with and without the following headset model numbers.

- 1) HDW-14322-003
- 2) HDW-15766-005
- 3) HDW-44306-001


#### 1.6 Battery

The device was tested with the following Lithium Ion Battery pack.

- 1) BAT-44582-001

#### 1.7 Procedure used to establish test signal

The device was put into test mode for SAR measurements by placing a voice call from a Rohde & Schwarz CMU 200 Communications Test Instrument. The power control level was set to command the device to transmit at full power at the specified frequency. Other parameters include: Channel type = full rate, discontinuous transmission off, frequency hopping off.

		Document		Page
		<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		<b>7(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30 , 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

## 1.8 Highlights of the FCC OET SAR Measurement Requirements

### 1.8.1 SAR Measurement Procedures for 802.11 b/g/n Transmitter

- Maintained dielectric parameter uncertainty to  $\pm 5.0\%$  of the target value.
- Liquid depth from SAM ERP or flat phantom was kept at 15 cm.
- Probe Requirement: Used SPEAG probe model ET3DV6/ES3DV3 for 2.45 GHz SAR testing specs are outlined below:

Probe tip to sensor center	2.7 mm / 2.0 mm
Probe tip diameter is	6.8 mm / 4.0 mm
Probe calibration uncertainty	< 15 % for f = 2.45 GHz
Probe calibration range	$\pm 100$ MHz

**Table 1.8.1. Probe specification requirements**


- System accuracy validation was conducted within  $\pm 100$  MHz of device mid-band frequency and results were within  $\pm 10\%$  of the manufacturers target value for each band.
- Zoom Scan: The following settings were used for the validation and measurement.

Closet Measurement Point to Phantom	4.0 mm
Zoom Scan (x,y) Resolution	7.5 mm
Zoom Scan (z) Resolution	5.0 mm
Zoom Scan Volume	Minimum 30 x 30 x 30 mm*

**Table 1.8.2. Zoom Scan requirement**

**\*Note: “Auto-extend zoom scan when maxima on boundary” is enabled, which can result in the zoom scan dimensions varying between 30x30x30 to 60x60x30.**


- Frequency Channel Configuration: 802.11 b/g modes are tested on “default test channels” 1, 6 and 11.
- For each frequency band, testing at higher rates and higher modulations is not required when the maximum average output power for each of these configurations is less than  $\frac{1}{4}$  dB higher than those measured at the lowest data rate.
- SAR is not required for 802.11g/n channels when the maximum average output power is less than  $\frac{1}{4}$  dB higher than that measured on the corresponding 802.11b channels.
- SAR test was conducted on each “default test channel” and each band with the worst case modulation and highest duty cycle.
- Conducted power measurements:

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>8(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

802.11b @ 1Mbps		802.11g @ 6Mbps		802.11n @ 6.5 Mbps	
Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)
1	17.8	1	14.1	1	14.0
6	18.0	6	15.1	6	14.9
11	18.1	11	15.2	11	15.0
		802.11g			
Data Rate (Mbps)	Mod.	Channel 11	Data Rate (Mbps)	Mod.	Channel 11
		Cond. Power (dBm)			Cond. Power (dBm)
6	BPSK	15.2	1	BPSK	18.1
9	BPSK	14.7	2	DQPSK	17.9
12	QPSK	13.0	5.5	CCK	17.3
18	QPSK	12.2	11	CCK	16.8
24	16-QAM	10.2	22	CCK	18.1
36	16-QAM	9.4			
48	64-QAM	7.2			
54	64-QAM	7.1			
				802.11 n	
Data Rate (Mbps)	Mod.	Channel 11			
		Cond. Power (dBm)			
6.5	MCS0	15.0			
13	MCS1	12.9			
19.5	MCS2	12.2			
26	MCS3	10.2			
39	MCS4	9.5			
52	MCS5	7.5			
58.5	MCS6	7.4			
65	MCS7	6.4			


**Table 1.8.3. 802.11 b/g/n modulation type/data rate vs. conducted power**



	Document <b>SAR Compliance Test Report for the BlackBerry®          Smartphone Model RFE71UW</b>			Page <b>9(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

802.11b @ 1Mbps		802.11g @ 6Mbps		802.11n @ 6.5 Mbps			
Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)		
1	17.8	1	14.1	1	14.0		
6	18.0	6	15.1	6	14.9		
11	18.1	11	15.2	11	15.0		
		802.11g		802.11b			
Data Rate (Mbps)	Mod.	Channel 11		Data Rate (Mbps)	Mod.	Channel 11	
		Cond. Power (dBm)				Cond. Power (dBm)	
6	BPSK	15.2		1	BPSK	18.1	
9	BPSK	14.7		2	DQPSK	17.9	
12	QPSK	13.0		5.5	CCK	17.3	
18	QPSK	12.2		11	CCK	16.8	
24	16-QAM	10.2		22	CCK	18.1	
36	16-QAM	9.4					
48	64-QAM	7.2					
54	64-QAM	7.1					
				802.11 n			
Data Rate (Mbps)		Mod.		Channel 11			
				Cond. Power (dBm)			
6.5		MCS0		15.0			
13		MCS1		12.9			
19.5		MCS2		12.2			
26		MCS3		10.2			
39		MCS4		9.5			
52		MCS5		7.5			
58.5		MCS6		7.4			
65		MCS7		6.4			

**Table 1.8.4. 802.11 b/g/n modulation type/data rate vs. conducted power with Mobile Hot Spot mode enabled**

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			<b>10(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30 , 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

## 1.8.2 SAR Measurement Requirements for Bluetooth

Channel	Freq (MHz)	Mode	Conducted Transmit Power (dBm)
0	2402	DH5	9.5
39	2441	DH5	10.3
78	2480	DH5	10.2

Table 1.8.5. Bluetooth peak conducted power measurements

Channel	Freq (MHz)	Mode	Conducted Transmit Power (dBm)
0	2402	DH5	9.5
39	2441	DH5	10.3
78	2480	DH5	10.2

Table 1.8.6. Bluetooth peak conducted power measurements with Mobile Hot Spot mode enabled

## 1.8.3 SAR Measurement Procedures for 3G Devices


### WCDMA Handsets

#### Output Power Verification

- Maximum output power is verified on the High, Middle and Low channels using 12.2 kbps RMC, 12.2 kbps AMR with a 3.4 kbps SRB (signal radio bearer) with TPC (transmit power control) set to all “1’s” for WCDMA/HSPA or applying the required inner loop.
- For Release 6 HSPA, output power is measured according to requirements for HS-DPCCH Sub-test 1-4/1-5

#### Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>11(50)</b>	
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>


### Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. SAR for other spreading codes and multiple DPDCH<sub>n</sub>, when supported by the DUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH<sub>n</sub> configuration, are less than ¼ dB higher than those measured in 12.2 RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH<sub>n</sub> using the exposure configuration that results in the highest SAR with 12.2 RMC.

### Handsets with HSPA

Body SAR is not required for handsets with HSPA capabilities, when the maximum average output of each RF channel with HSPA active is less than ¼ dB higher than that measured in 12.2 kbps RMC without HSPA. Otherwise, SAR for HSPA is measured using FRC (fixed reference channel) in the body exposure configuration that results in the highest SAR for that RF channel in 12.2kbps RMC.

	Band	FDD V (850)			FDD IV (1700)		
	Channel	4132	4182	4233	1312	1413	1513
	Freq (MHz)	826.4	836.4	846.6	1712.4	1732.6	1752.6
Mode	Subtest	Max burst averaged conducted power (dBm)			Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	24.1	24.1	24.1	22.8	23.9	23.7
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	24.1	24.1	24.1	22.8	23.8	23.7
Rel5 HSDPA	1	24.1	24.1	24.0	22.8	23.8	23.7
Rel5 HSDPA	2	24.1	24.1	24.0	22.8	23.8	23.8
Rel5 HSDPA	3	23.7	23.6	23.5	22.4	23.6	23.4
Rel5 HSDPA	4	21.1	21.4	21.1	20.1	21.2	21.0
Rel6 HSUPA	1	24.2	24.1	24.1	22.8	23.9	23.7
Rel6 HSUPA	2	24.2	24.1	24.1	22.8	23.9	23.7
Rel6 HSUPA	3	23.7	23.6	23.6	22.4	23.4	23.3
Rel6 HSUPA	4	24.1	24.0	24.0	22.7	23.8	23.6
Rel6 HSUPA	5	22.0	21.8	21.9	20.5	21.9	21.4
	Band	FDD II (1900)					
	Channel	9262	9400	9538			
	Freq (MHz)	1852.4	1880.0	1907.6			
Mode	Subtest	Max burst averaged conducted power (dBm)					
Rel99	12.2 kbps RMC	24.0	23.9	23.9			
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	24.1	24.0	24.0			
Rel5 HSDPA	1	24.1	24.0	24.0			
Rel5 HSDPA	2	24.1	24.0	24.0			
Rel5 HSDPA	3	23.7	23.6	23.5			
Rel5 HSDPA	4	21.2	21.2	21.4			


	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>12(50)</b>	
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

Rel6 HSUPA	1	24.2	24.0	24.0			
Rel6 HSUPA	2	24.1	24.1	23.9			
Rel6 HSUPA	3	23.7	23.6	23.5			
Rel6 HSUPA	4	21.5	21.3	21.3			
Rel6 HSUPA	5	21.4	21.3	21.3			

**Table 1.8.7. WCDMA (Rel99) / HSPA conducted power measurements**


	Band	FDD V (850)			FDD IV (1700)		
	Channel	4132	4182	4233	1312	1413	1513
	Freq (MHz)	826.4	836.4	846.6	1712.4	1732.6	1752.6
Mode	Subtest	Max burst averaged conducted power (dBm)			Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	24.2	24.1	24.1	16.7	17.8	17.6
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	24.1	24.1	24.1	16.6	17.7	17.6
Rel5 HSDPA	1	24.1	24.0	24.0	16.6	17.7	17.5
Rel5 HSDPA	2						
Rel5 HSDPA	3						
Rel5 HSDPA	4						
Rel6 HSUPA	1	24.2	24.1	24.1	16.7	17.8	17.6
Rel6 HSUPA	2						
Rel6 HSUPA	3						
Rel6 HSUPA	4						
Rel6 HSUPA	5	22.1	21.8	21.9	14.8	15.6	15.8
	Band	FDD II (1900)					
	Channel	9262	9400	9538			
	Freq (MHz)	1852.4	1880.0	1907.6			
Mode	Subtest	Max burst averaged conducted power (dBm)					
Rel99	12.2 kbps RMC	20.0	19.7	19.8			
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	19.9	19.7	19.7			
Rel5 HSDPA	1	19.8	19.6	19.6			
Rel5 HSDPA	2						
Rel5 HSDPA	3						
Rel5 HSDPA	4						
Rel6 HSUPA	1	19.9	19.7	19.7			
Rel6 HSUPA	2						
Rel6 HSUPA	3						
Rel6 HSUPA	4						
Rel6 HSUPA	5	18.1	17.8	17.8			

**Table 1.8.8. WCDMA (Rel99) / HSPA conducted power measurements with Mobile Hot Spot mode enabled**

		Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>		Page <b>13(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

#### **1.8.4 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities**

Standalone personal wireless routers and handsets with hotspot mode capabilities must address hand-held and other near-body exposure conditions to show SAR compliance. The following procedures are applicable when the overall device length and width are  $\geq 9$  cm x 5 cm respectively. A test separation of 10 mm is required. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25 mm from that surface or edge, for the data modes, wireless technologies and frequency bands supporting hotspot mode. The standalone SAR results in each device test orientation must be analyzed for the applicable hotspot mode simultaneous transmission configurations to determine SAR test exclusion and volume scan requirements

		Document		Page
		<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		<b>14(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30, 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

## 1.9 Highlights of the FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters/ Antennas & GSM/GPRS/EDGE Procedure

### Unlicensed Transmitters

When there is simultaneous transmission –  
Stand-alone SAR not required when

- output  $\leq 2 \cdot P_{Ref}$  and antenna is  $> 5.0$  cm from other antennas
- output  $\leq P_{Ref}$  and antenna is  $> 2.5$  cm from other antennas
- the other antenna(s), which are  $< 2.5$  cm away, has an output  $\leq P_{Ref}$  OR max 1g SAR  $< 1.2$  W/kg

Otherwise stand-alone SAR is required

- test SAR on highest output channel for each wireless mode and exposure condition
- if SAR for highest output channel is  $> 50\%$  of SAR limit, evaluate all channels according to normal procedure

### Simultaneous Transmission SAR not required:

Unlicensed only

- when stand-alone 1-g SAR is not required and antenna is  $> 5$  cm from other antennas
- when the other antenna(s), which are  $< 2.5$  cm away, has an output  $\leq P_{Ref}$  OR max 1g SAR  $< 1.2$  W/kg

Licensed & Unlicensed

- when the sum of the 1-g SAR is  $< 1.6$  W/kg for each pair of simultaneous transmitting antennas.
- or
- when the ratio of SAR to peak SAR separation distance of simultaneous transmitting antenna pair is  $< 0.3$


### Simultaneous Transmission SAR required:


Licensed & Unlicensed

- antenna pairs with SAR to antenna separation ratio  $\geq 0.3$ ; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition.

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
$P_{Ref}$	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

**Table 1.9.1. Output Power Thresholds for Unlicensed Transmitters**

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>15(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

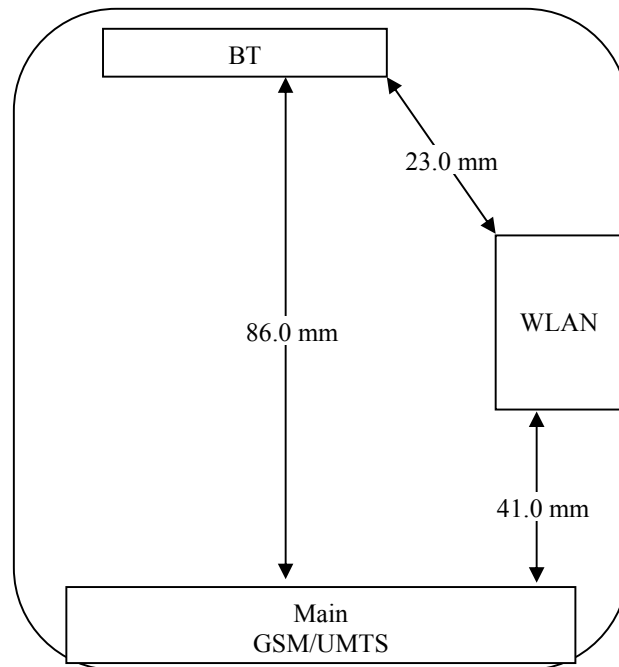

**Figure 1.9.1. Back view of device showing closest distance between antenna pairs**


### 1.9.1 Simultaneous Transmission Analysis

Simultaneous Transmission Combination	Head	Body-Worn Accessory	Mobile Hotspot
WCDMA/GSM voice + WiFi 2.4 GHz + BT	Yes	Yes	Yes
WCDMA/GSM voice + WiFi 2.4 GHz	Yes	Yes	Yes
WCDMA/GSM voice + BT	Yes	Yes	Yes
HSPA/EDGE/GPRS data + WiFi 2.4 GHz + BT	Yes	Yes	Yes
HSPA/EDGE/GPRS data + WiFi 2.4 GHz	Yes	Yes	Yes
HSPA/EDGE/GPRS data + BT	Yes	Yes	Yes
WiFi 2.4 GHz + BT	Yes	Yes	Yes

**Table 1.9.2. Simultaneous Transmission Scenarios**

Note:

- 1) WCDMA/HSPA/GSM share the same transmitting antenna and cannot transmit simultaneously.
- 2) BT Stand-alone SAR test is not required and value of zero is considered for SAR summation.

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>16(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>


Test	Configuratio n	Licensed Transmitters		WiFi 2.4 G 1 g avg. SAR (W/kg)	Maximum Summation 1 g avg. SAR (W/kg)
		Band	1 g avg. SAR (w/kg)		
Head SAR	Right Cheek	WCDMA band V	1.04	0.36	1.40
	Right Cheek	WCDMA band IV	1.17	0.36	1.53
	Right Cheek	WCDMA band II	0.66	0.36	1.02
	Right Cheek	GSM/EDGE 850	1.22	0.36	1.58
	Right Cheek	GSM/EDGE 1900	0.41	0.36	0.77
	Right Tilt	WCDMA band V	0.52	0.22	0.74
	Right Tilt	WCDMA band IV	0.33	0.22	0.55
	Right Tilt	WCDMA band II	0.44	0.22	0.66
	Right Tilt	GSM/EDGE 850	0.55	0.22	0.77
	Right Tilt	GSM/EDGE 1900	0.28	0.22	0.50
	Left Cheek	WCDMA band V	0.90	0.29	1.19
	Left Cheek	WCDMA band IV	1.24	0.29	1.53
	Left Cheek	WCDMA band II	1.27	0.29	1.56
	Left Cheek	GSM/EDGE 850	1.02	0.29	1.31
	Left Cheek	GSM/EDGE 1900	0.84	0.29	1.13
	Left Tilt	WCDMA band V	0.56	0.20	0.76
	Left Tilt	WCDMA band IV	0.50	0.20	0.70
	Left Tilt	WCDMA band II	0.47	0.20	0.67
	Left Tilt	GSM/EDGE 850	0.58	0.20	0.78
	Left Tilt	GSM/EDGE 1900	0.61	0.20	0.81

**Table 1.9.3. Highest Head SAR values and summation**

Note:

- 1) If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
- 2) If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
- 3) If the ratio of SAR to peak separation distance is < 0.3, Simultaneous SAR measurement is not required.



	Document <b>SAR Compliance Test Report for the BlackBerry®          Smartphone Model RFE71UW</b>			Page <b>17(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

Test	Configuration	Licensed Transmitters		WiFi 2.4 G 1 g avg. SAR (W/kg)	Maximum Summation 1 g avg. SAR (W/kg)
		Band	1 g avg. SAR (w/kg)		
Body- Worn SAR	Holster, device back	WCDMA band V	0.80	0.07	0.87
		WCDMA band IV	1.38	0.07	1.45
		WCDMA band II	0.56	0.07	0.63
		GPRS/EDGE 850	0.86	0.07	0.93
		GPRS/EDGE 1900	0.34	0.07	0.41
	20 mm separation, device back	WCDMA band V	0.60	0.09	0.69
		WCDMA band IV	1.23	0.09	1.32
		WCDMA band II	0.59	0.09	0.68
		GPRS/EDGE 850	0.61	0.09	0.70
		GPRS/EDGE 1900	0.40	0.09	0.49
	20 mm separation, device back, headset	WCDMA band V	0.43	0.05	0.48
		WCDMA band IV	1.41	0.05	1.46
		WCDMA band II	0.62	0.05	0.67
		GPRS/EDGE 850	0.50	0.05	0.55
		GPRS/EDGE 1900	0.40	0.05	0.45

**Table 1.9.4. Highest Body-worn SAR values for the same configuration**


Test	Configuration	Licensed Transmitters		WiFi 2.4 G 1 g avg. SAR (W/kg)	Maximum Summation 1 g avg. SAR (W/kg)
		Band	1 g avg. SAR (w/kg)		
Mobile Hotspot SAR	10 mm separation, device back	WCDMA band V	1.21	0.23	1.44
		WCDMA band IV	1.11	0.23	1.34
		WCDMA band II	1.39	0.23	<b>1.62</b>
		GPRS/EDGE 850	1.33	0.23	1.56
		GPRS/EDGE 1900	1.39	0.23	<b>1.62</b>

**Table 1.9.5. Highest Mobile Hotspot SAR values for the same configuration**

Note:

- 4) If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
- 5) If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.

If the ratio of SAR to peak separation distance is < 0.3, Simultaneous SAR measurement is not required

	Document <b>SAR Compliance Test Report for the BlackBerry®          Smartphone Model RFE71UW</b>			Page <b>18(50)</b>	
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

Test	Configuration	Licensed Transmitters		SAR peak location (cm)			Closest Distance (cm)	Pair Sum (W/kg)	Ratio
		Band	1 g avg. SAR (w/kg)	X	Y	Z			
Mobile Hotspot SAR	10 mm separation, device back	WiFi 2.4G	0.23	-42.5	-7.0	-208.2	5.97	1.62	0.27
		WCDMA band II	1.39	-17.0	47.0	-207.8			
		WiFi 2.4G	0.23	-42.5	-7.0	-208.2	6.74	1.62	0.24
		GPRS 1900	1.39	-18.5	56.0	-207.8			

**Table 1.9.6. Highest Mobile Hotspot SAR values and ratio of SAR to peak location**

**BT & WiFi:**

- BT Stand-alone SAR is not required because the WiFi antenna, which is < 2.5 cm away, has an max 1g SAR < 1.2 W/kg
- BT Simultaneous Transmission SAR is not required because BT Stand-alone SAR is not required.

**BT & GSM/WCDMA:**

- BT Stand-alone SAR is not required because the BT output  $\leq 2 \cdot P_{ref}$  and antenna is > 5.0 cm from the main antenna
- BT Simultaneous Transmission SAR is not required because BT Stand-alone SAR is not required.


**GSM & WiFi:**

- Head Configuration:
  - GSM/EDGE/GPRS & WiFi Stand-alone SAR is required.
  - Simultaneous Transmission is not required as the sum of the 1-g SAR is < 1.6 W/kg.
- Body Configuration:
  - GSM/EDGE/GPRS & WiFi Stand-alone SAR is required.
  - Simultaneous Transmission is not required as the sum of the 1-g SAR is < 1.6 W/kg, or the ratio of SAR to peak separation distance is < 0.3.

**WCDMA & WiFi:**

- Head Configuration:
  - WCDMA & WiFi Stand-alone SAR is required.
  - Simultaneous Transmission is required as the sum of the 1-g SAR is > 1.6 W/kg.
- Body Configuration:
  - WCDMA & WiFi Stand-alone SAR is required.
  - Simultaneous Transmission is not required as the sum of the 1-g SAR is < 1.6 W/kg, or the ratio of SAR to peak separation distance is < 0.3.

- The device supports DTM, GPRS Category Class A/B, Multi-Slot Class 10 with maximum 5-slots (2-slots uplink and 3-slot downlink).
- For body SAR configurations, 2-slots GPRS (PD) mode were tested.
- In GPRS mode, GMSK Modulation was used using CS1-CS4 or MCS1-MCS4.


		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>19(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

- 8-PSK modulation or MCS5-MCS9 code scheme were avoided since maximum burst avg power was measured lower on those modulation schemes.
- Each slot is set to maximum power, but there is software power reduction of ~ 2 dB in multislot modes.

- Please refer to the conducted power measurements table below:


Mode	Freq. (MHz)	Max burst averaged conducted power (dBm) CS1	Max burst averaged conducted power (dBm) MCS1	Max burst averaged conducted power (dBm) MCS5
2-slots GPRS 850 MHz	824.2	31.0	N/A	N/A
	836.8	31.0	N/A	N/A
	848.8	31.1	N/A	N/A
2-slots DTM 850 MHz	824.2	30.9	30.9	28.2/30.9
	836.8	30.8	30.8	28.2/30.9
	848.8	30.9	30.9	28.2/30.9
2-slots EDGE 850 MHz	824.2	31.0	31.1	27.0
	836.8	31.0	31.0	27.0
	848.8	31.0	31.0	27.0
2-slots GPRS 1900 MHz	1850.2	28.0	N/A	N/A
	1880.0	27.9	N/A	N/A
	1909.8	27.8	N/A	N/A
2-slots DTM 1900 MHz	1850.2	27.8	27.7	25.6/27.8
	1880.0	27.7	27.7	25.6/27.7
	1909.8	27.7	27.7	25.6/27.7
2-slots EDGE 1900 MHz	1850.2	28.0	28.0	25.8
	1880.0	27.8	27.8	25.7
	1909.8	27.8	27.8	25.6
Mode	Freq. (MHz)	Max burst averaged conducted power (dBm)		
1-slot GSM (CS) 850 MHz	824.2	33.1		
	836.8	33.0		
	848.8	33.0		
1-slot GSM (CS) 1900 MHz	1850.2	28.7		
	1880.0	29.4		
	1909.8	29.4		

#### 1.9.7. GSM/EDGE/GPRS channel vs. conducted power

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>20(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

<b>Mode</b>	<b>Freq. (MHz)</b>	<b>Max burst averaged conducted power (dBm) CS1</b>	<b>Max burst averaged conducted power (dBm) MCS1</b>	<b>Max burst averaged conducted power (dBm) MCS5</b>
2-slots GPRS 850 MHz	824.2	30.0	N/A	N/A
	836.8	30.0	N/A	N/A
	848.8	30.0	N/A	N/A
2-slots DTM 850 MHz	824.2	29.9	29.9	29.9 / 26.9
	836.8	29.9	29.9	29.9 / 26.9
	848.8	29.9	29.9	29.9 / 26.9
2-slots EDGE 850 MHz	824.2	30.0	30.0	27.0
	836.8	30.0	30.0	27.0
	848.8	30.0	30.0	27.0
2-slots GPRS 1900 MHz	1850.2	25.7	N/A	N/A
	1880.0	25.6	N/A	N/A
	1909.8	25.6	N/A	N/A
2-slots DTM 1900 MHz	1850.2	25.6	25.6	25.6 / 24.9
	1880.0	25.6	25.6	25.6 / 24.9
	1909.8	25.6	25.6	25.6 / 24.9
2-slots EDGE 1900 MHz	1850.2	25.7	25.6	25.5
	1880.0	25.6	25.6	25.4
	1909.8	25.6	25.6	25.4
<b>Mode</b>	<b>Freq. (MHz)</b>	<b>Max burst averaged conducted power (dBm)</b>		
1-slot GSM (CS) 850 MHz	824.2	32.8		
	836.8	32.9		
	848.8	33.0		
1-slot GSM (CS) 1900 MHz	1850.2	28.4		
	1880.0	29.1		
	1909.8	29.1		

**1.9.8. GSM/EDGE/GPRS channel vs. conducted power  
with Mobile Hot Spot mode enabled**

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>21(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

## 2.0 DESCRIPTION OF THE TEST EQUIPMENT

### 2.1 SAR measurement system

SAR measurements were performed using a Dosimetric Assessment System (DASY52), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY 52 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module that performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector that is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
- The functions of the PC plug-in card based on a DSP is to perform the time critical tasks such as signal filtering, surveillance of the robot operation fast movement interrupts.
- A computer operating Windows.
- DASY52 software version 52.6(2).
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM Twin Phantom enabling testing left-hand and right-hand usage.
- The device holder for mobile phones.
- Tissue simulating liquid mixed according to the given recipes (see section 6.1).
- System validation dipoles allowing for the validation of proper functioning of the system.

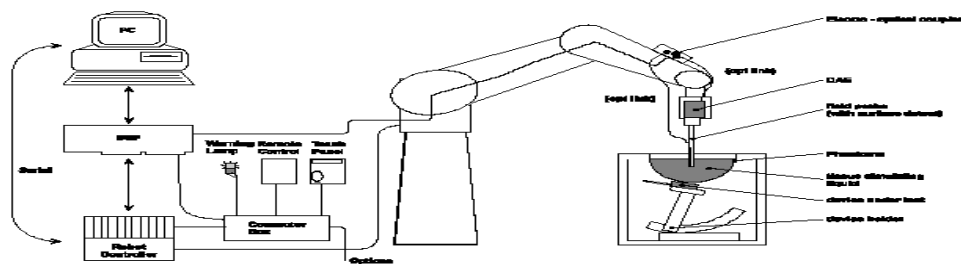




Figure 2.1.1. System Description

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>22(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

### 2.1.1 Equipment List

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	E-field probe	ES3DV3	3225	01/11/2013
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3 V1	473	01/13/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D835V2	446	01/21/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1800V2	2d020	01/13/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1900V2	545	01/13/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D2450V2	747	11/09/2013
Agilent Technologies	Signal generator	8648C	4037U03155	09/23/2013
Agilent Technologies	Power meter	E4419B	GB40202821	09/23/2013
Agilent Technologies	Power sensor	8481A	MY41095417	09/27/2012
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
Agilent Technologies	Power meter	N1911A	MY45100905	05/17/2013
Agilent Technologies	Power sensor	N1921A	MY45241383	08/30/2012
Weinschel Corp	20dB Attenuator	33-20-34	BMO697	CNR
Agilent Technologies	Network analyzer	8753ES	US39174857	09/20/2012
Rohde & Schwarz	Base Station Simulator	CMU 200	109747	11/20/2012
Rohde & Schwarz	Base Station Simulator	CMU 200	118277	11/30/2012
Rohde & Schwarz	Base Station Simulator	CMU 200	112394	11/21/2012

**Table 2.1.1. Equipment list**

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>23(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

## 2.2 Description of the test setup

Before SAR measurements are conducted, the device and the DASY equipment are setup as follows:

### 2.2.1 Device and base station simulator setup

- Power up the device.
- Turn on the base station simulator and set the radio channel and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the device.

### 2.2.2 DASY setup

- Turn the computer on and log on to Windows.
- Start the DASY software by clicking on the icon located on the Windows desktop.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position
- Align the probe by clicking the ‘Align probe in light beam’ button.
- Open a file and configure the proper parameters - probe, medium, communications system etc.
- Establish a connection between the Device and the communications test instrument. Place the Device on the stand and adjust it under the phantom.
- Start SAR measurements.


## 3.0 ELECTRIC FIELD PROBE CALIBRATION

### 3.1 Probe Specifications

SAR measurements were conducted using the dosimetric probes ES3DV3/ET3DV6, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fibre for the surface detection system and built-in shielding against static discharge. The probe is sensitive to E-fields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.

Property	Data
Frequency range	30 MHz – 3 GHz
Linearity	±0.1 dB
Directivity (rotation around probe axis)	≤ ±0.2 dB
Directivity (rotation normal to probe axis)	±0.4 dB
Dynamic Range	5 mW/kg – 100 W/kg
Probe positioning repeatability	±0.2 mm
Spatial resolution	< 0.125 mm <sup>3</sup>

**Table 3.1.1. Probe specifications**

	Document			Page
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			<b>24(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30, 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

### 3.2 Probe calibration and measurement uncertainty

The probe had been calibrated with an accuracy better than  $\pm 12\%$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D and below:

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.28	6.28	6.28	0.67	1.99	$\pm 12.0\%$
900	41.5	0.97	5.96	5.96	5.96	0.72	1.88	$\pm 12.0\%$
1810	40.0	1.40	5.10	5.10	5.10	0.63	2.36	$\pm 12.0\%$
2450	39.2	1.80	4.34	4.34	4.34	0.89	1.73	$\pm 12.0\%$

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.18	6.18	6.18	0.79	1.86	$\pm 12.0\%$
900	55.0	1.05	5.92	5.92	5.92	0.61	2.26	$\pm 12.0\%$
1810	53.3	1.52	4.69	4.69	4.69	0.65	2.60	$\pm 12.0\%$
2450	52.7	1.95	4.14	4.14	4.14	1.00	1.37	$\pm 12.0\%$

Table 3.2.1. Probe ET3DV6 SN: 1644

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.42	6.42	6.42	0.27	2.04	$\pm 12.0\%$
900	41.5	0.97	6.06	6.06	6.06	0.35	1.74	$\pm 12.0\%$
1810	40.0	1.40	5.23	5.23	5.23	0.73	1.21	$\pm 12.0\%$
1950	40.0	1.40	4.98	4.98	4.98	0.58	1.41	$\pm 12.0\%$
2450	39.2	1.80	4.50	4.50	4.50	0.79	1.26	$\pm 12.0\%$
2600	39.0	1.96	4.32	4.32	4.32	0.77	1.32	$\pm 12.0\%$

#### Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.27	6.27	6.27	0.36	1.74	$\pm 12.0\%$
900	55.0	1.05	6.07	6.07	6.07	0.29	2.02	$\pm 12.0\%$
1810	53.3	1.52	4.92	4.92	4.92	0.50	1.57	$\pm 12.0\%$
1950	53.3	1.52	4.87	4.87	4.87	0.59	1.49	$\pm 12.0\%$
2450	52.7	1.95	4.30	4.30	4.30	0.68	1.16	$\pm 12.0\%$
2600	52.5	2.16	4.12	4.12	4.12	0.80	0.99	$\pm 12.0\%$

Table 3.2.2. Probe ES3DV3 SN: 3225

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY v4.4 and higher. DASY 52 has been used for measurements, therefore  $\pm 100$  MHz tolerance is valid.

Measured dielectric parameters are within  $\pm 5\%$  of the probe calibration values and target values. Expanded probe calibration uncertainty (k=2) is  $< 15\%$



		Document		Page
		<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		<b>25(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30 , 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

#### 4.0 SAR MEASUREMENT SYSTEM VERIFICATION


Prior to conducting SAR measurements, the system was validated using the dipole validation kit and the flat section of the SAM phantom. A power level of 1.0W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are within the allowed tolerances.

At above 1.5 – 2 GHz, dipoles maintain good return loss of -15 dB to -20 dB, therefore SAR measurements are limited to approximately +/- 100 MHz of the probe/dipole calibration frequency.

#### 4.1 System accuracy verification for head adjacent use

f (MHz)	Limits / Measured (MM/DD/YYYY)	SAR 1 g/10 g (W/kg)	Dielectric Parameters		Liquid Temp. (°C)
			$\epsilon_r$	$\sigma$ [S/m]	
835	Measured (07/12/2012)	9.44/6.18	42.1	0.90	22.5
	Measured (07/16/2012)	9.50/6.24	42.9	0.90	23.0
	Measured (07/24/2012)	9.39/6.16	40.2	0.88	23.1
	Recommended Limits	9.63/6.27	41.5	0.90	N/A
1800	Measured (07/05/2012)	36.1/18.8	38.0	1.42	21.5
	Measured (07/26/2012)	38.1/19.9	38.1	1.47	22.6
	Recommended Limits	39.2/20.5	40.0	1.40	N/A
1900	Measured (07/09/2012)	40.1/21.1	38.9	1.38	23.0
	Measured (07/30/2012)	40.5/21.3	38.4	1.39	23.0
	Recommended Limits	40.0/20.8	40.0	1.40	N/A
2450	Measured (07/11/2012)	56.4/26.6	39.7	1.82	22.3
	Recommended Limits	54.1/25.3	39.2	1.80	N/A

**Table 4.1.1. System accuracy (validation for head adjacent use)**

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>26(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

## 5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fibreglass shell integrated with a wooden table.

The SAM Twin Phantom is a fibreglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left side head
- Right side head
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with freestanding robots.


The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.

Liquid depth of  $\geq 15$  cm is maintained in the phantom for all the measurements.



**Figure 5.0.1. SAM Twin Phantom**

	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			Page <b>27(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>
				IC ID <b>2503A-RFE70UW</b>

## 6.0 TISSUE DIELECTRIC PROPERTIES

### 6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids are shown in the table below.


INGREDIE NT	MIXTURE 800– 900MHz		MIXTURE 1800– 1900MHz		MIXTURE 2450 MHz		MIXTURE 5 – 6 GHz	
	Brain %	Muscle %	Brain %	Muscle %	Brain %	Muscle %	Brain %	Muscl e %
Water	40.29	65.45	55.24	69.91	55.0	68.75	64	64-78
Sugar	57.90	34.31	0	0	0	0	0	0
Salt	1.38	0.62	0.31	0.13	0	0	0	0
HEC	0.24	0	0	0	0	0	0	0
Bactericide	0.18	0.10	0	0	0	0	0	0
DGBE	0	0	44.45	29.96	40.0	31.25	0	0
Triton X- 100	0	0	0	0	5.0	0	0	0
Additives and Salt	0	0	0	0	0	0	3	2-3
Emulsifiers	0	0	0	0	0	0	15	9-15
Mineral Oil	0	0	0	0	0	0	18	11-18

**Table 6.1.1. Tissue simulant recipe**

#### 6.1.1 Equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A
Dell	PC using GPIB card	GX110	347	N/A
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Agilent Technologies	Network Analyzer	8753ES	US39174857	09/20/2012
Control Company	Digital Thermometer	23609-234	21352860	09/30/2012

**Table 6.1.2. Tissue simulant preparation equipment**

		Document		Page
		<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		<b>28(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30, 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

### 6.1.2 Preparation procedure

#### 800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

#### 1800-2450 MHz liquid

- Fill the container with water and place it on hotplate. Begin heating and stirring.
- Add the salt, Glycol/Triton X-100. The container must be covered to prevent evaporation.
- Keep the liquid hot enough to dissolve sugar for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.


### 6.2 Electrical parameters of the tissue simulating liquid

The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are shown in the table below.

Recommended limits are adopted from IEEE P1528-2003:


“Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, DASy manual and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>

Band (MHz)	Tissue Type	Limits / Measured (MM/DD/YYYY)	f (MHz)	Dielectric Parameters		Liquid Temp (°C)	
				$\epsilon_r$	$\sigma$ [S/m]		
835	Head	Measured (07/12/2012)	825	42.3	0.89	22.5	
			835	42.1	0.90		
			850	42.0	0.92		
		Measured (07/16/2012)	825	42.9	0.87	23.0	
			835	42.9	0.90		
			850	42.8	0.90		
		Measured (07/24/2012)	815	40.5	0.86	23.1	
			825	40.4	0.87		
			835	40.2	0.88		
	Muscle	Measured (07/12/2012)	Recommended Limits	850	40.0	0.89	N/A
				835	41.5	0.90	
				825	52.7	0.96	
				835	52.7	0.97	
		Measured (07/24/2012)	850	52.6	0.99	22.4	
815	53.8		0.93	23.1			


		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			Page <b>29(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>	

			825	53.8	0.96	
			835	53.8	0.97	
			850	53.7	1.00	
		Recommended Limits	835	55.2	0.97	N/A
1800	Head	Measured (07/05/2012)	1710	38.5	1.33	21.5
			1750	38.3	1.37	
			1800	38.0	1.42	
		Measured (07/26/2012)	1710	38.7	1.39	22.6
			1750	38.5	1.42	
			1800	38.1	1.47	
		Recommended Limits	1800	40.0	1.40	N/A
	Muscle	Measured (07/26/2012)	1710	51.6	1.45	22.6
			1750	51.4	1.50	
1800			51.1	1.55		
Recommended Limits			1800	53.3	1.52	
1900	Head	Measured (07/09/2012)	1850	39.0	1.33	23.0
			1900	38.9	1.38	
			1910	38.8	1.40	
			1980	38.6	1.47	
		Measured (07/30/2012)	1850	38.6	1.34	23.0
			1900	38.4	1.39	
			1910	38.4	1.40	
			1980	38.1	1.47	
			Recommended Limits	1900	40.0	
	Muscle	Measured (07/09/2012)	1850	51.0	1.51	23.0
			1900	50.7	1.56	
			1910	50.6	1.57	
		Measured (07/30/2012)	1850	51.1	1.50	23.0
			1900	50.9	1.56	
			1910	50.9	1.57	
	Recommended Limits	1900	53.3	1.52	N/A	
2450	Head	Measured (07/11/2012)	2400	39.5	1.78	22.3
			2450	39.7	1.82	
			2480	39.5	1.85	
		Recommended Limits	2450	39.2	1.80	N/A
	Muscle	Measured (07/11/2012)	2400	53.8	1.92	22.3
			2450	53.9	1.96	
			2480	53.7	2.01	
		Recommended Limits	2450	52.7	1.95	N/A

**Table 6.2.1. Electrical parameters of tissue simulating liquid**

	Document <b>SAR Compliance Test Report for the BlackBerry®          Smartphone Model RFE71UW</b>			Page <b>30(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

### 6.2.2 Test Configuration

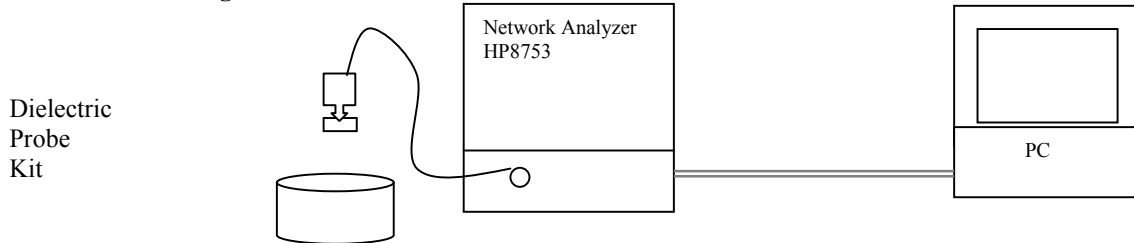


**Figure 6.2.1. Test configuration**

### 6.2.3 Procedure

1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ( $\pm 1^\circ$ ).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.
6. Relative permittivity  $\epsilon_r = \epsilon'$  and conductivity can be calculated from  $\epsilon''$   

$$\sigma = \omega \epsilon_0 \epsilon''$$
7. Measure liquid shortly after calibration.
8. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
9. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
10. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
11. Perform measurements.
12. Adjust medium parameters in DASY software for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Head 835 MHz) and press 'Option'-button.
13. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 835 MHz).

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>31(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

## 7.0 SAR SAFETY LIMITS

Standards/Guideline	Localized SAR Limit (W/kg) General public (uncontrolled)	Localized SAR Limits (W/kg) Workers (controlled)
ICNIRP Standard	2.0 (10g)	10.0 (10g)
IEEE C95.1 Standard	1.6 (1g)	8.0 (1g)


**Table 7.0.1. SAR safety limits for Controlled / Uncontrolled environment**

Human Exposure	Localized SAR Limits (W/kg) 10g, ICNIRP Standard	Localized SAR Limits (W/kg) 1g, IEEE C95.1 Standard
Spatial Average (averaged over the whole body)	0.08	0.08
Spatial Peak (averaged over any X g of tissue)	2.00	1.60
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.00	4.00 (10g)

**Table 7.0.2. SAR safety limits**

**Uncontrolled Environments** are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>32(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

## 8.0 DEVICE POSITIONING

### 8.1 Device holder for SAM Twin Phantom


The Device was positioned for all test configurations using the DASY5 holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



**Figure 8.1.1. Device Holder**

1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the earpiece is in the symmetry plane of the clamp).
2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the earpiece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and backsides, the phone holder angle (3) is 0°.
3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).
4. Shift the phone clamp (6) so that the earpiece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even after changing the phantom or phantom section.
5. Adjust the device position angles to the desired measurement position.



	Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>33(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>
		IC ID <b>2503A-RFE70UW</b>	

6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking. (The point of contact depends on the design of the device and the positioning angle).

## 8.2 Description of the test positioning

### 8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528- 2003 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

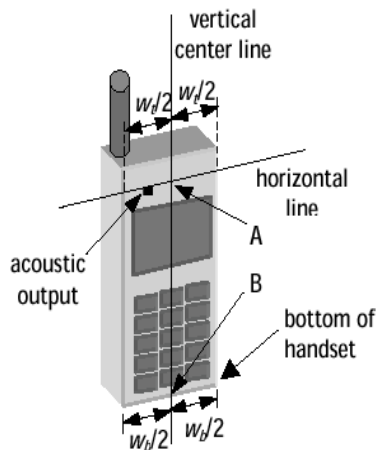


Figure 8.2.1a. Handset vertical and horizontal reference lines – fixed case



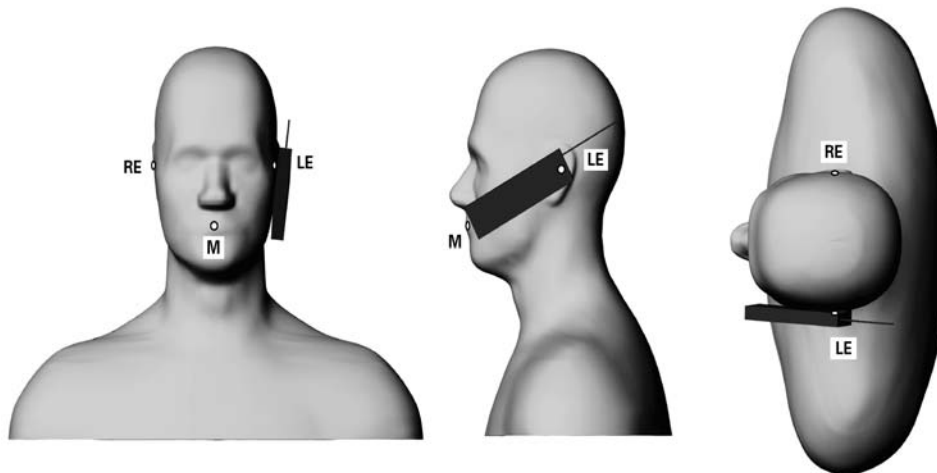


Figure 8.2.1b. Handset vertical and horizontal reference lines – “clam-shell”


		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>34(50)</b>	
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>	

### 8.2.1.1 Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A on Figures 8.2.1a and 8.2.1b), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 8.2.1a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 8.2.1b), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 8.2.1), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB (“mouth-back”) - NF (“neck-front”) including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

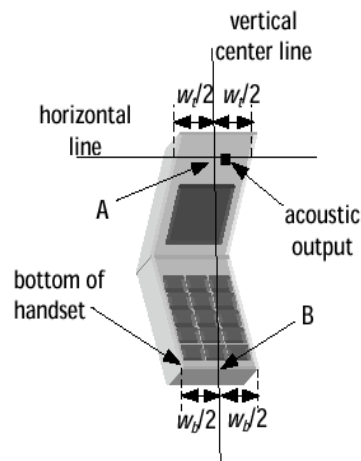


**Figure 8.2.2. Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.**

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>35(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

### 8.2.1.2 Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 of 5.4.1 (in this report 8.2.1.1) to replace the device in the “cheek position.”
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

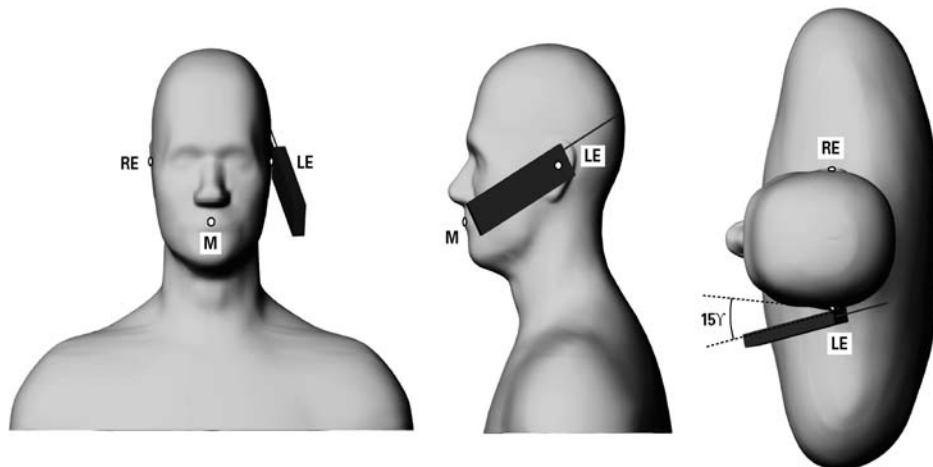

**Figure 8.2.3. Phone position 2, “tilted position.”** The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

### 8.2.2 Body-worn Configuration

Body-worn holsters, as shown on Figure 1.4.1, have been test with the device for FCC RF exposure compliance. The EUT was positioned in each holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the device to simulate hands-free operation in a body worn holster configuration.


In addition, device was tested with 20 mm RIM recommended separation distance to allow typical after-market holster to be used. RIM body-worn holsters with belt-clip have been designed to maintain ~ 20 mm separation distance from body.

### 8.2.3 Limb/Hand Configuration

BlackBerry device is not a limb-worn device and hasn’t been tested for such a configuration.

As per Clause 6.1.4.9 in the IEC/EN 62209-2 standard:

"Additional studies remain needed for devising a representative method for evaluating SAR in the hand of hand-held devices. Future versions of this standard are intended to contain a test method based on scientific data and rationale. Annex J presents the currently available test procedure."

		Document		Page
		<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		<b>36(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30 , 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

Clause J.2 of the IEC/EN 62209-2 states that testing for compliance for the exposure of the hand is not applicable for devices that are intended to being hand-held to enable use at the ear (see EN 62209-1) or worn on the body when transmitting.

In addition, BlackBerry device is not intended to be held in hand at a distance of larger than 200 mm from the head and body during normal use.

## 9.0 HIGH LEVEL EVALUATION

### 9.1 Maximum search

The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

### 9.2 Extrapolation


The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.

### 9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

### 9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are only available for the predefined cube 5x5x7 / 7x7x9 scan. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm / 24x24x20 with 7.5mm / 4.0 resolution in (x,y) and 5mm / 2.5mm resolution in z axis amounts to 175 / 693 measurement points. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.


	Document			Page	
	<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			<b>37(50)</b>	
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID	
Andrew Becker	July 05 – July 30, 2012	RTS-5992-1207-37	L6ARFE70UW	2503A-RFE70UW	

## 10.0 MEASUREMENT UNCERTAINTY

DASY5 Uncertainty Budget According to IEEE 1528/2003 [1]								
Error Description	Uncert. value	Prob. Dist.	Div.	( $c_i$ ) 1g	( $c_i$ ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±5.5 %	N	1	1	1	±5.5 %	±5.5 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	R	$\sqrt{3}$	0.64	0.43	±1.8 %	±1.2 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1 %	∞
Liquid Permittivity (target)	±5.0 %	R	$\sqrt{3}$	0.6	0.49	±1.7 %	±1.4 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5 %	±1.2 %	∞
Combined Std. Uncertainty						±10.7 %	±10.5 %	387
Expanded STD Uncertainty						±21.4 %	±21.0 %	

**Table 10.0.1. Worst-Case uncertainty budget for DASY52 assessed according to IEEE P1528.  
Source: Schmid & Partner Engineering AG.**

[1] The budget is valid for the frequency range 300MHz - 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			Page <b>38(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>	

## 11.0 TEST RESULTS

### 11.1 SAR Measurement results at highest power measured against the head


Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	2-slots GSM/EDGE 850 MHz	824.2	31.0	22.9	0.84	0.00	0.84
		836.8	31.0	22.9	0.94	-0.01	0.94
		848.8	31.0	22.9	1.22	0.13	1.22
Right Head 15° Tilt	2-slots GSM/EDGE 850 MHz	824.2					
		836.8	31.0	22.8	0.55	-0.10	0.55
		848.8					
Right Head Cheek	1-slot GSM 850 MHz	824.2					
		836.8					
		848.8	33.0	22.8	1.00	-0.08	1.00
Left Head Cheek	2-slots GSM/EDGE 850 MHz	824.2	31.0	23.0	0.74	-0.02	0.74
		836.8	31.0	23.0	0.85	-0.05	0.85
		848.8	31.0	23.0	1.02	0.00	1.02
Left Head 15° Tilt	2-slots GSM/EDGE 850 MHz	824.2					
		836.8	31.0	22.9	0.58	-0.02	0.58
		848.8					
Left Head Cheek	1-slot GSM 850 MHz	824.2					
		836.8					
		848.8	33.0	23.0	0.80	-0.03	0.80

**Table 11.1.1. SAR results for GSM/EDGE 850 head configuration**

**Note 1:** If the power drift is  $\leq -0.200$  dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

**Note 2:** Only Middle channel was tested when 1g Average SAR  $< 0.8$  W/Kg or 3dB lower than the limit.


	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>39(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD V 850 MHz	826.4	24.1	22.8	0.76	0.02	0.76
		836.4	24.1	22.8	0.94	-0.06	0.94
		846.6	24.1	22.8	1.04	-0.02	1.04
Right Head 15° Tilt	WCDMA FDD V 850 MHz	826.4					
		836.4	24.1	22.8	0.52	0.03	0.52
		846.6					
Left Head Cheek	WCDMA FDD V 850 MHz	826.4	24.1	22.5	0.66	-0.01	0.66
		836.4	24.1	22.5	0.85	-0.02	0.85
		846.6	24.1	22.5	0.90	0.02	0.90
Left Head 15° Tilt	WCDMA FDD V 850 MHz	826.4					
		836.4	24.1	23.0	0.56	0.03	0.56
		846.6					

**Table 11.1.2. SAR results for WCDMA FDD V head configuration**

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD IV 1700 MHz	1712.4	22.8	22.3	1.16	-0.04	1.16
		1732.6	23.9	22.3	1.17	-0.04	1.17
		1752.6	23.7	22.3	1.15	-0.05	1.15
Right Head 15° Tilt	WCDMA FDD IV 1700 MHz	1712.4					
		1732.6	23.9	22.3	0.33	0.03	0.33
		1752.6					
Left Head Cheek	WCDMA FDD IV 1700 MHz	1712.4	22.8	21.5	1.12	-0.09	1.12
		1732.6	23.9	21.6	1.24	-0.12	1.24
		1752.6	23.7	21.5	1.24	-0.09	1.24
Left Head 15° Tilt	WCDMA FDD IV 1700 MHz	1712.4					
		1732.6	23.9	21.4	0.50	0.09	0.50
		1752.6					

**Table 11.1.3A. Rev 3 SAR results for WCDMA FDD IV head configuration**

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>40(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>


Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD IV 1700 MHz	1712.4					
		1732.6	23.9	22.6	1.02	-0.07	1.02
		1752.6					
Left Head Cheek	WCDMA FDD IV 1700 MHz	1712.4					
		1732.6					
		1752.6	23.7	22.6	1.17	-0.20	1.22

**Table 11.1.3B. Rev 4 SAR results for WCDMA FDD IV head configuration**

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	2-slots GSM/EDGE 1900 MHz	1850.2					
		1880.0	27.8	22.0	0.41	0.11	0.41
		1909.8					
Right Head 15° Tilt	2-slots GSM/EDGE 1900 MHz	1850.2					
		1880.0	27.8	22.0	0.28	0.08	0.28
		1909.8					
Right Head Cheek	1-slot GSM 1900 MHz	1850.2					
		1880.0	29.4	22.0	0.34	-0.08	0.34
		1909.8					
Left Head Cheek	2-slots GSM/EDGE 1900 MHz	1850.2	28.0	22.0	0.76	0.04	0.76
		1880.0	27.8	22.0	0.81	0.16	0.81
		1909.8	27.8	22.0	0.84	-0.07	0.84
Left Head 15° Tilt	2-slots GSM/EDGE 1900 MHz	1850.2					
		1880.0	27.8	22.1	0.25	0.14	0.25
		1909.8					
Left Head Cheek	1-slot GSM 1900 MHz	1850.2					
		1880.0					
		1909.8	29.4	21.9	0.67	0.01	0.61

**Table 11.1.4. SAR results for GSM/EDGE 1900 head configuration**




	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>41(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD II 1900 MHz	1852.4					
		1880.0	23.9	22.9	0.66	-0.08	0.66
		1907.6					
Right Head 15° Tilt	WCDMA FDD II 1900 MHz	1852.4					
		1880.0	23.9	23.0	0.44	0.08	0.44
		1907.6					
Left Head Cheek	WCDMA FDD II 1900 MHz	1852.4	24.0	23.0	1.02	0.04	1.02
		1880.0	23.9	23.0	1.10	-0.05	1.10
		1907.6	23.9	23.0	1.27	0.02	<b>1.27</b>
Left Head 15° Tilt	WCDMA FDD II 1900 MHz	1852.4					
		1880.0	23.9	22.9	0.47	0.04	0.47
		1907.6					

**Table 11.1.5. SAR results for WCDMA FDD II head configuration**

Test Position	Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	802.11 b 2450 MHz	2412					
		2437					
		2462	18.1	22.3	0.36	0.07	0.36
Right Head 15° Tilt	802.11 b 2450 MHz	2412					
		2437					
		2462	18.1	22.3	0.22	0.00	0.22
Left Head Cheek	802.11 b 2450 MHz	2412					
		2437					
		2462	18.1	22.3	0.29	0.27	0.29
Left Head 15° Tilt	802.11 b 2450 MHz	2412					
		2437					
		2462	18.1	22.3	0.20	-0.17	0.20

**Table 11.1.6. SAR results for WiFi/WLAN/802.11b head configuration**

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			Page <b>42(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>	

### 11.2 SAR measurement results at highest power measured against the body using accessories

Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS 850 MHz	824.2		No Holster, back side 20 mm away				
	836.8	31.0	No Holster, back side 20 mm away	22.5	0.61	0.00	0.61
	848.8		No Holster, back side 20 mm away				
	836.8	31.0	No Holster, front side 20 mm away	22.5	0.50	0.02	0.50
	824.2	31.0	Vertical Holster, back side facing	22.6	0.78	0.00	0.78
	836.8	31.0	Vertical Holster, back side facing	22.6	0.85	0.01	0.85
	848.8	31.1	Vertical Holster, back side facing	22.6	0.86	-0.05	0.86
	836.8	31.0	Vertical Holster, HS back side facing	22.5	0.50	-0.04	0.50


**Table 11.2.1. SAR results for GPRS 850 body-worn configurations**

**Note 1:** If the power drift is  $\leq -0.200$  dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

**Note 2:** Only Middle channel was tested when 1g Average SAR < 0.8 W/Kg or 3dB lower than the limit.

**Note 3:** Device was tested with 20 mm RIM recommended separation distance to allow typical after-market holster to be used. RIM body-worn holsters with belt-clip have been designed to maintain ~ 20 mm separation distance from body.

	Document <b>SAR Compliance Test Report for the BlackBerry®          Smartphone Model RFE71UW</b>			Page <b>43(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>


Mode	Freq. (MHz)	Cond. Power (dBm)	MHS mode / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS 850 MHz	824.2	30.0	Back side 10 mm away	22.6	1.08	-0.05	1.08
	836.8	30.0	Back side 10 mm away	22.6	1.23	0.02	1.23
	848.8	30.0	Back side 10 mm away	22.6	1.33	-0.14	1.33
	836.8	30.0	Front side 10 mm away	22.7	0.63	0.01	0.63
	824.2	30.0	Right side 10 mm away	22.6	0.70	0.06	0.70
	836.8	30.0	Right side 10 mm away	22.6	0.80	0.03	0.80
	848.8	30.0	Right side 10 mm away	22.6	0.81	0.02	0.81
	836.8	30.0	Left side 10 mm away	22.7	0.63	0.07	0.63
	836.8	30.0	Bottom side 10 mm away	22.7	0.05	-0.09	0.05

**Table 11.2.2. SAR results for GPRS 850 body-worn configurations with Mobile Hot Spot mode enabled**

**Note 4:** Any side of the phone that is further than 2.5 cm away from the transmitting antenna can be exempted from testing.

Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD V 850 MHz	826.4		No Holster, back side 20 mm away				
	836.4	24.1	No Holster, back side 20 mm away	22.5	0.60	0.00	0.60
	846.6		No Holster, back side 20 mm away				
	836.4	24.1	No Holster, front side 20 mm away	22.5	0.51	-0.05	0.51
	826.4	24.1	Vertical Holster, back side facing	22.6	0.71	-0.06	0.71
	836.4	24.1	Vertical Holster, back side facing	22.6	0.80	-0.01	0.80
	846.6	24.1	Vertical Holster, back side facing	22.6	0.78	-0.03	0.78
	836.4	24.1	Vertical Holster, HS, back side facing	22.5	0.43	0.01	0.43

**Table 11.2.3. SAR results for WCDMA FDD V body-worn configurations**

	Document <b>SAR Compliance Test Report for the BlackBerry®          Smartphone Model RFE71UW</b>			Page <b>44(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>


Mode	Freq. (MHz)	Cond. Power (dBm)	MHS mode / device configuration	Liquid Temp. (°C)	SAR, averaged over 10 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD V 850 MHz	826.4	24.2	Back side 10 mm away	22.2	1.01	0.01	1.01
	836.4	24.1	Back side 10 mm away	22.2	1.18	-0.02	1.18
	846.6	24.1	Back side 10 mm away	22.2	1.21	-0.02	1.21
	826.4	24.2	Front side 10 mm away	22.4	0.68	-0.03	0.68
	836.4	24.1	Front side 10 mm away	22.4	0.84	0.02	0.84
	846.6	24.1	Front side 10 mm away	22.4	0.88	0.00	0.88
	836.4	24.1	Right side 10 mm away	22.6	0.75	0.00	0.75
	836.4	24.1	Left side 10 mm away	22.6	0.59	0.02	0.59
	836.4	24.1	Bottom side 10 mm away	22.6	0.06	0.01	0.06

**Table 11.2.4. SAR results for WCDMA FDD V body-worn configurations with Mobile Hot Spot mode enabled**

**Note 3:** Any side of the phone that is further than 2.5 cm away from the transmitting antenna can be exempted from testing.

Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD IV 1700 MHz	1712.4	22.8	No Holster, back side 20 mm away	21.8	0.83	0.04	0.83
	1732.6	23.9	No Holster, back side 20 mm away	22.6	1.20	-0.02	1.20
	1752.6	23.7	No Holster, back side 20 mm away	21.8	1.23	0.03	1.23
	1732.6	23.9	No Holster, front side 20 mm away	21.8	0.47	0.06	0.47
	1712.4	22.8	Vertical Holster, back side facing	22.6	1.16	0.05	1.16
	1732.6	23.9	Vertical Holster, back side facing	22.6	1.27	0.10	1.27
	1752.6	23.7	Vertical Holster, back side facing	22.6	1.38	-0.01	1.38
	1752.6	23.7	Vertical Holster, HS, back side facing	22.5	1.41	0.22	<b>1.41</b>

**Table 11.2.5. SAR results for WCDMA FDD IV body-worn configurations**

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>45(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>


Mode	Freq. (MHz)	Cond. Power (dBm)	MHS mode / device configuration	Liquid Temp. (°C)	SAR, averaged over 10 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD IV 1700 MHz	1712.4	16.7	Back side 10 mm away	21.5	0.72	0.05	0.72
	1732.6	17.8	Back side 10 mm away	21.8	1.11	0.07	1.11
	1752.6	17.6	Back side 10 mm away	21.5	1.07	-0.03	1.07
	1732.6	17.8	Front side 10 mm away	21.5	0.37	-0.05	0.37
	1732.6	17.8	Right side 10 mm away	22.5	0.09	0.04	0.09
	1732.6	17.8	Left side 10 mm away	22.5	0.08	0.08	0.08
	1732.6	17.8	Bottom side 10 mm away	22.5	0.68	-0.01	0.68

**Table 11.2.6. SAR results for WCDMA FDD IV body-worn configurations with Mobile Hot Spot mode enabled**

**Note 3:** Any side of the phone that is further than 2.5 cm away from the transmitting antenna can be exempted from testing.


Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS 1900 MHz	1850.2		No Holster, back side 20 mm away				
	1880.0	27.9	No Holster, back side 20 mm away	21.8	0.40	-0.09	0.40
	1909.8		No Holster, back side 20 mm away				
	1880.0	27.9	No Holster, front side 20 mm away	21.8	0.18	0.30	0.18
	1880.0	27.9	Vertical Holster, back side facing	21.8	0.34	-0.04	0.34
	1880.0	27.9	No Holster, HS, back side 20 mm away	21.8	0.40	0.01	0.40

**Table 11.2.7. SAR results for GPRS 1900 body-worn configurations**

	Document <b>SAR Compliance Test Report for the BlackBerry®  Smartphone Model RFE71UW</b>			Page <b>46(50)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>

Mode	Freq. (MHz)	Cond. Power (dBm)	MHS mode / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS 1900 MHz	1850.2	25.7	Back side 10 mm away	22.9	1.39	0.18	1.39
	1880.0	25.6	Back side 10 mm away	22.9	1.26	0.09	1.26
	1909.8	25.6	Back side 10 mm away	22.9	1.20	0.10	1.20
	1880.0	25.6	Front side 10 mm away	22.0	0.33	-0.03	0.33
	1880.0	25.6	Right side 10 mm away	22.0	0.06	-0.09	0.06
	1880.0	25.6	Left side 10 mm away	22.0	0.19	-0.02	0.19
	1880.0	25.6	Bottom side 10 mm away	22.0	0.71	-0.02	0.71

**Table 11.2.8. SAR results for GPRS 1900 body-worn configurations with Mobile Hot Spot mode enabled**


		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>			Page <b>47(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30, 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>	

Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD II 1900 MHz	1852.4		No Holster, back side 20 mm away				
	1880.0	23.9	No Holster, back side 20 mm away	21.8	0.59	-0.02	0.59
	1907.6		No Holster, back side 20 mm away				
	1880.0	23.9	No Holster, front side 20 mm away	21.8	0.30	-0.06	0.30
	1880.0	23.9	Vertical Holster, back side facing	21.8	0.56	0.01	0.56
	1880.0	23.9	No Holster, HS, back side 20 mm away	21.8	0.62	0.41	0.62

**Table 11.2.9. SAR results for WCDMA FDD II body-worn configurations**

Mode	Freq. (MHz)	Cond. Power (dBm)	MHS mode / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD II 1900 MHz	1852.4	20.0	Back side 10 mm away	22.9	1.39	-0.09	<b>1.39</b>
	1880.0	19.7	Back side 10 mm away	23.2	1.36	-0.13	1.36
	1907.6	19.8	Back side 10 mm away	22.9	1.24	0.01	1.24
	1880	19.7	Front side 10 mm away	22.0	0.37	0.04	0.37
	1880	19.7	Right side 10 mm away	22.0	0.07	0.11	0.07
	1880	19.7	Left side 10 mm away	22.0	0.18	-0.04	0.18
	1880	19.7	Bottom side 10 mm away	22.0	0.74	0.05	0.74

**Table 11.2.10. SAR results for WCDMA FDD II body-worn configurations with Mobile Hot Spot mode enabled**

	Document <b>SAR Compliance Test Report for the BlackBerry®          Smartphone Model RFE71UW</b>			Page <b>48(50)</b>	
	Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>


Mode	Freq. (MHz)	Cond. Power (dBm)	Holster type / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
802.11b/ WLAN 2450 MHz	2462	18.1	No Holster, back side 20 mm away	22.4	0.09	0.18	0.09
	2462	18.1	No Holster, front side 20 mm away	22.4	0.05	0.15	0.05
	2462	18.1	Vertical Holster, back side facing	22.5	0.07	-0.16	0.07
	2462	18.1	No Holster, HS, back side 20 mm away	22.4	0.05	-0.03	0.05

**Table 11.2.11. SAR results for WiFi/WLAN/802.11b body-worn configurations**

Mode	Freq. (MHz)	Cond. Power (dBm)	MHS mode / device configuration	Liquid Temp. (°C)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
802.11b/ WLAN 2450 MHz	2462	18.1	Back side 10 mm away	22.4	0.23	-0.09	0.23
	2462	18.1	Front side 10 mm away	22.5	0.06	0.31	0.06
	2462	18.1	Right side 10 mm away	22.5	0.07	0.01	0.07
	2462		Left side 10 mm away				
	2462		Top side 10 mm away				
	2462		Bottom side 10 mm away				


**Table 11.2.12. SAR results for WiFi/WLAN/802.11b body-worn configurations with Mobile Hot Spot mode enabled**



		Document		Page
		<b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		<b>49(50)</b>
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
<b>Andrew Becker</b>	<b>July 05 – July 30, 2012</b>	<b>RTS-5992-1207-37</b>	<b>L6ARFE70UW</b>	<b>2503A-RFE70UW</b>

## 12.0 REFERENCES

- [1] IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [2] EN 50360: 2001, Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
- [3] ICNIRP, International Commission on Non-Ionizing Radiation Protection (2009), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).
- [4] Council Recommendation 1999/519/EC of July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)
- [5] IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- [6] IEEE C95.1-2005, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- [7] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
- [8] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.
- [9] DASY 5 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL, Schmid & Partner Engineering AG.
- [10] Health Canada, Safety Code 6, 2009: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency range from 3 kHz to 300 GHz.
- [11] RSS-102, issue 4-2010: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields.
- [12] IEC 62209-1, First Edition-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- [13] FCC OET SAR Measurement Requirements for 3 – 6 GHz, October, 2006.
- [14] FCC OET SAR Measurement Procedures for 802.11 a/b/g Transmitters, May, 2007.
- [15] FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters & Antennas, September, 2008.
- [16] FCC OET SAR Test Reduction Procedure for GSM/GPRS/EDGE, December, 2008.

		Document <b>SAR Compliance Test Report for the BlackBerry® Smartphone Model RFE71UW</b>		Page <b>50(50)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>July 05 – July 30 , 2012</b>	Test Report No <b>RTS-5992-1207-37</b>	FCC ID: <b>L6ARFE70UW</b>	IC ID <b>2503A-RFE70UW</b>

[17] FCC OET SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz – 3 GHz, January, 2007.

[18] FCC OET RF Exposure Procedures for Mobile and Portable Devices, and Equipment Authorization Policies, November, 2009.

[19] FCC OET SAR Measurements Procedures for 3G Devices, October, 2007.

[20] Dipole Requirements for SAR System Validation and Verification, Novmeber, 2009.

[21] IEC 62209-2, Edition 1.0-2010: Human exposure to radio frequency fields from hand-held and body-mount wireless communication devices – Human Models, instrumentation, and procedures - part 2 - procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).

[22] FCC OET SAR Evaluation Procedure for Portable Devices with Wireless Router capability.

[23] IEC/EN 62311-2008: Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz).