

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 1(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 2(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/24/2012 3:46:32 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_low_chan_amb_temp_23.0C_liq_temp_23.0C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839


Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz
Medium parameters used: $f = 825$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 40.361$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.761 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.410 V/m; Power Drift = -0.21 dB
Peak SAR (extrapolated) = 0.8590
SAR(1 g) = 0.717 mW/g; SAR(10 g) = 0.551 mW/g
Maximum value of SAR (measured) = 0.771 mW/g

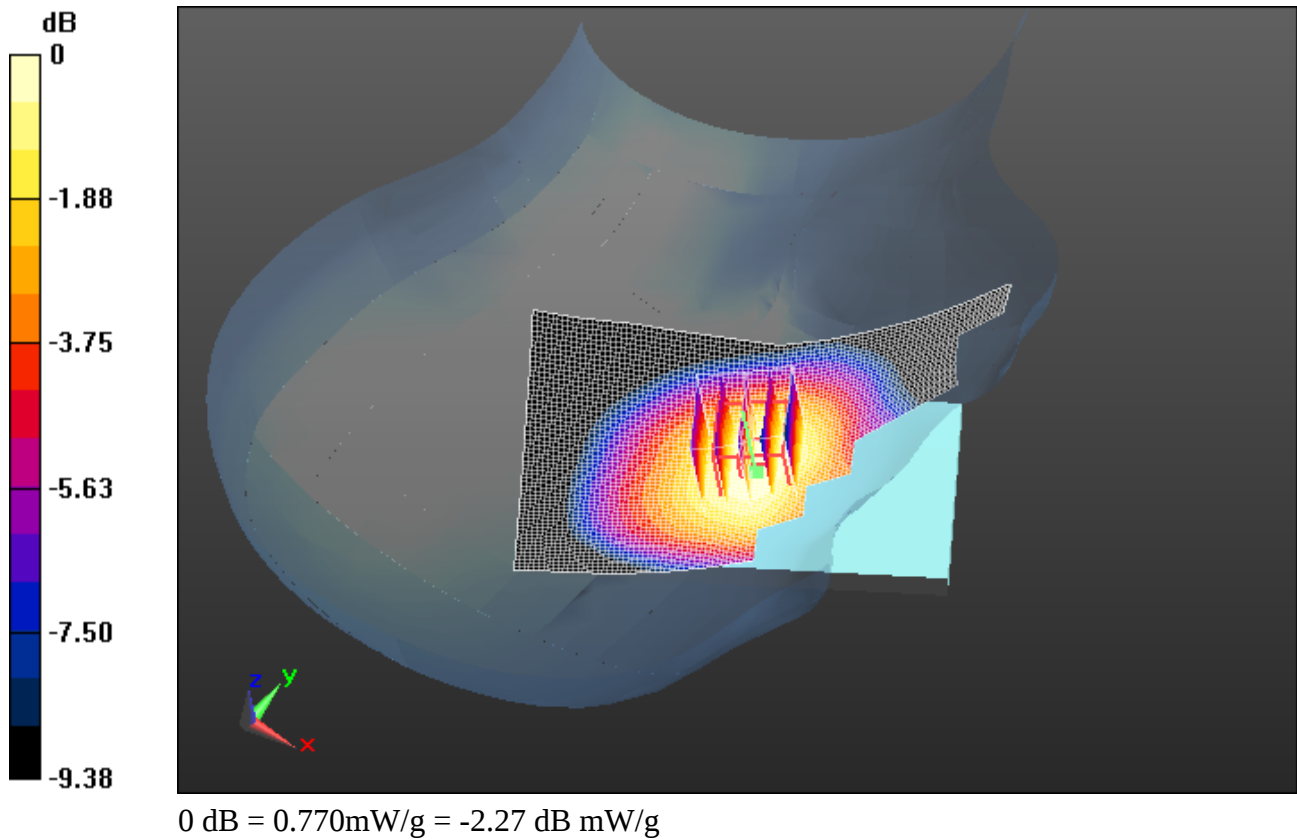

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 4(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/24/2012 3:27:30 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_mid_chan_amb_temp_23.0C_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.879 \text{ mho/m}$; $\epsilon_r = 40.179$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.894 mW/g


Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.200 V/m; Power Drift = -0.27 dB
Peak SAR (extrapolated) = 0.9940
SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.625 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.880 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 5(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

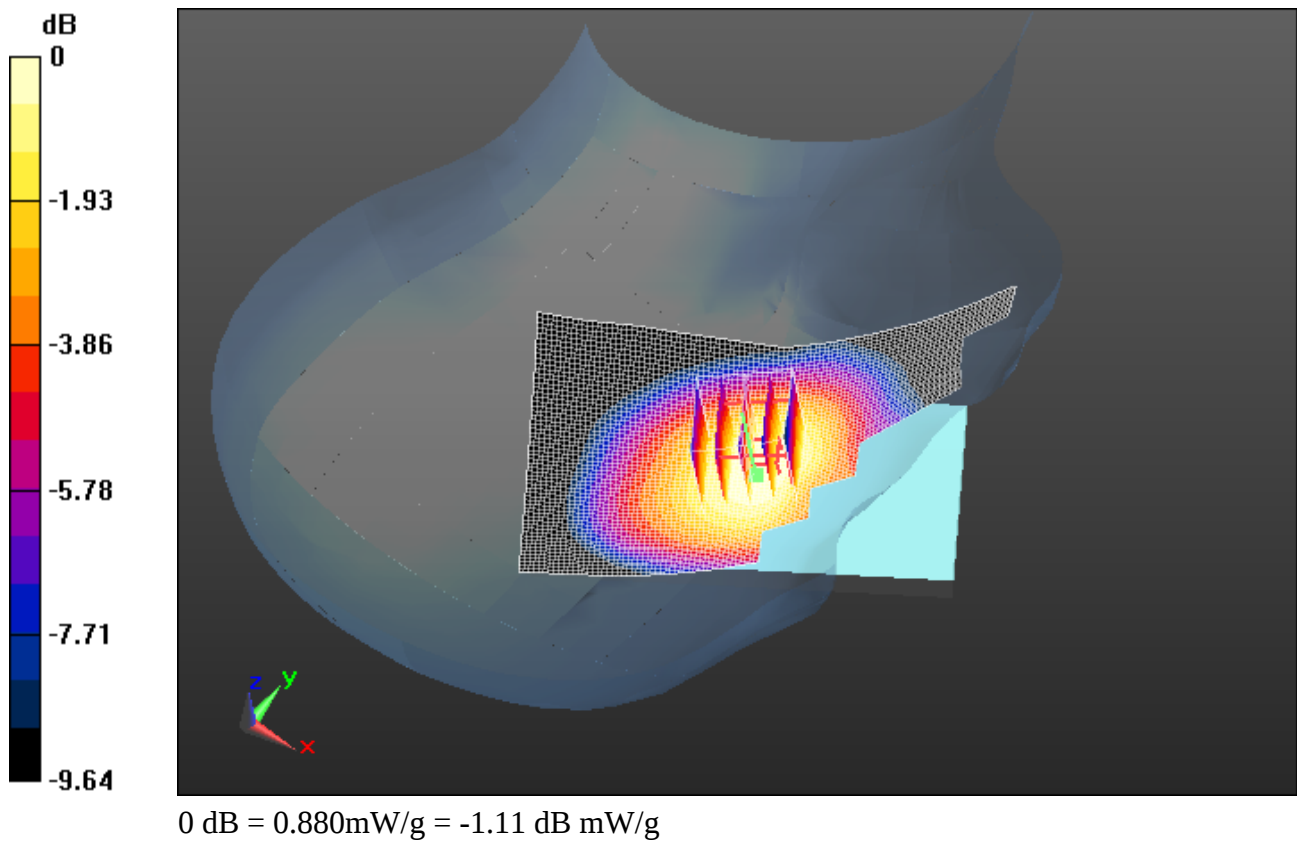

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 6(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/24/2012 4:04:20 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE850_high_chan_amb_temp_23.0C_liq_temp_22.9
C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.021$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.983 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.348 V/m; Power Drift = -0.007 dB
Peak SAR (extrapolated) = 1.0830
SAR(1 g) = 0.901 mW/g; SAR(10 g) = 0.687 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.977 mW/g

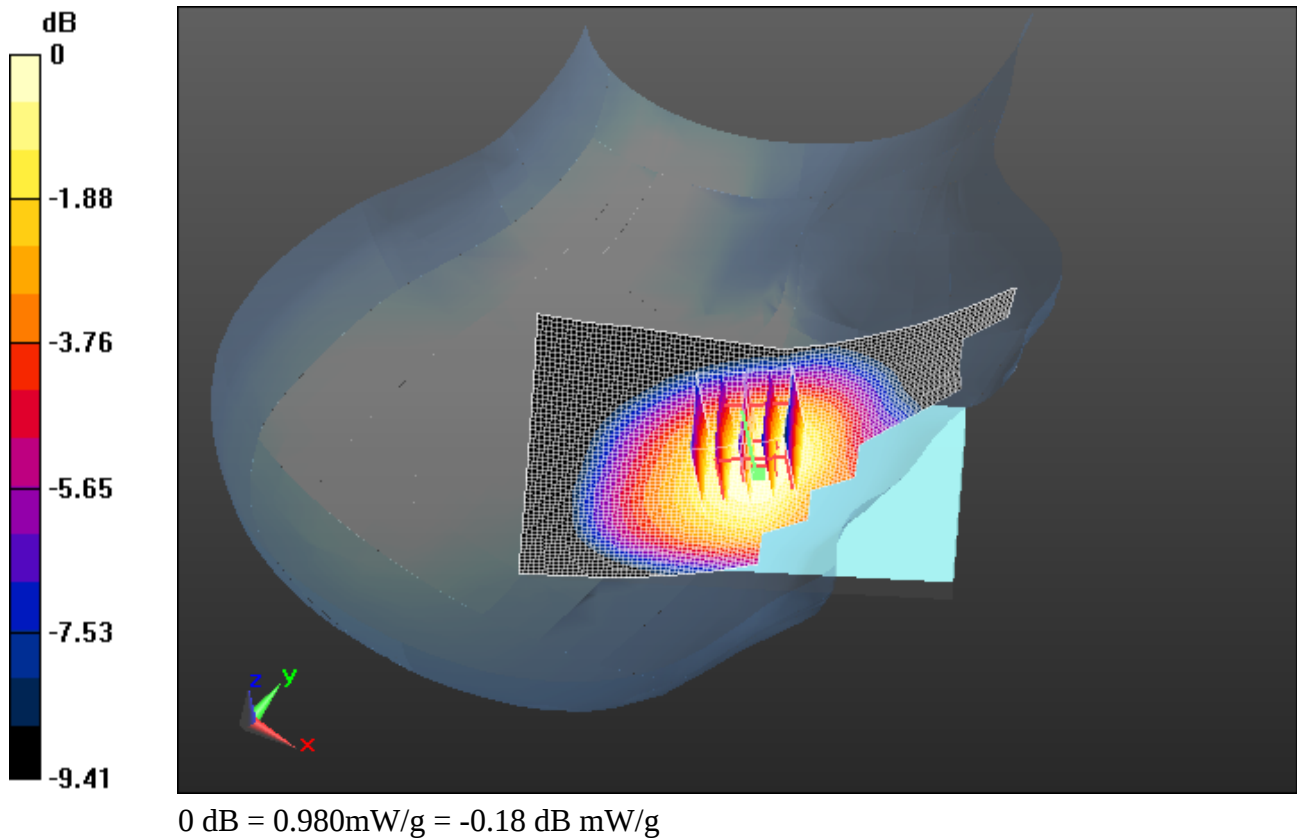

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report				Page 8(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW	

Date/Time: 7/24/2012 4:22:20 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_EDGE850_mid_chan_amb_temp_23.6C_liq_temp_2
2.9C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.462 mW/g


Configuration/Tilt position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 16.277 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.5370
SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.328 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.472 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 9(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

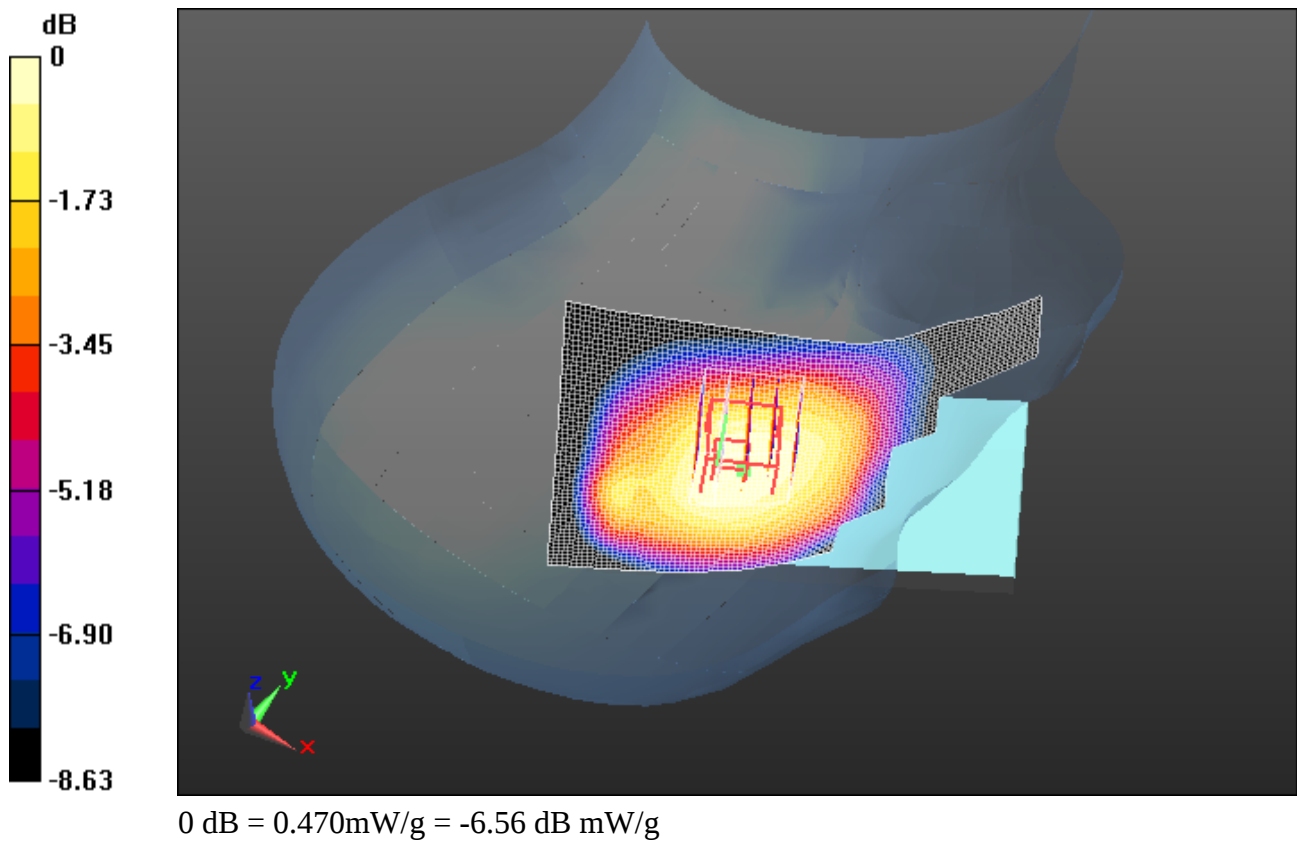

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 10(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/24/2012 4:41:27 PM

Test Laboratory: RIM Testing Services

RightHandSide_GSM850_high_chan_amb_temp_23.0C_liq_temp_22.9C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: GSM 850; Frequency: 848.8 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.021$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.766 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 8.572 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.8630

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.540 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.769 mW/g

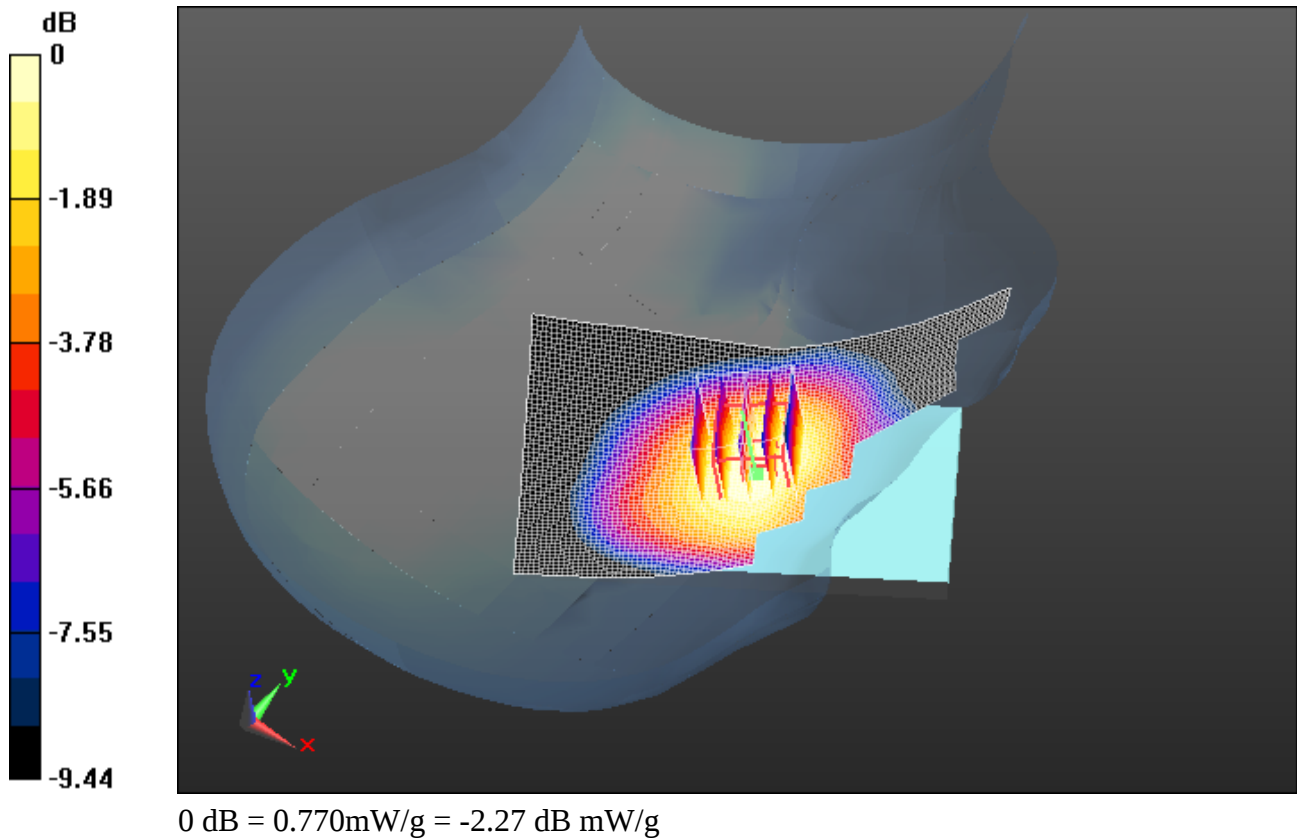

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 12(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/24/2012 6:35:39 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_mid_chan_amb_temp_23.6C_liq_temp_22.8C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.530 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.001 V/m; Power Drift = 0.40 dB


Peak SAR (extrapolated) = 0.6100

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.358 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.526 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 13(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

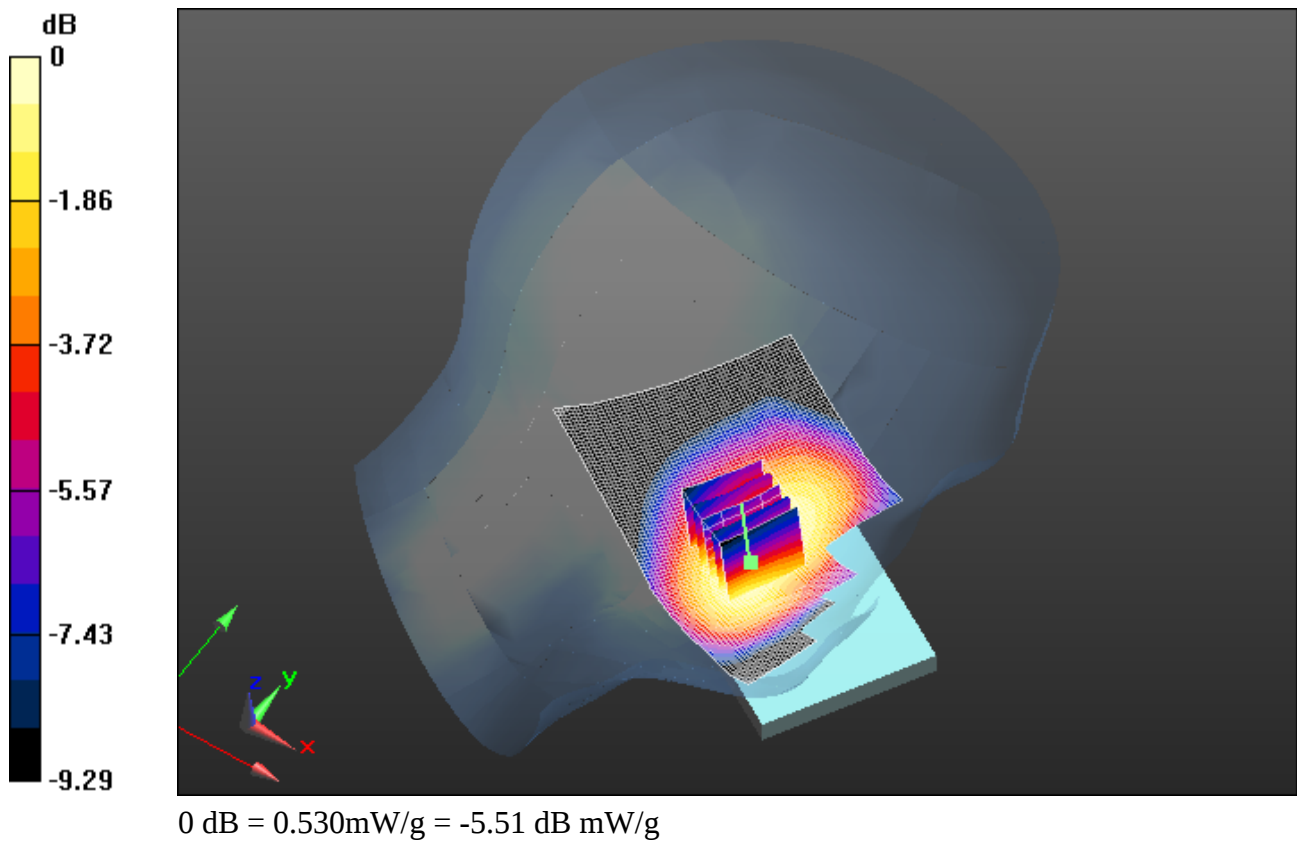

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report				Page 14(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW	

Date/Time: 7/24/2012 7:33:47 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_EDGE850_mid_chan_amb_temp_23.2C_liq_temp_22
.8C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.324 mW/g


Configuration/Tilt position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.325 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.3660
SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.234 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.330 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 15(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

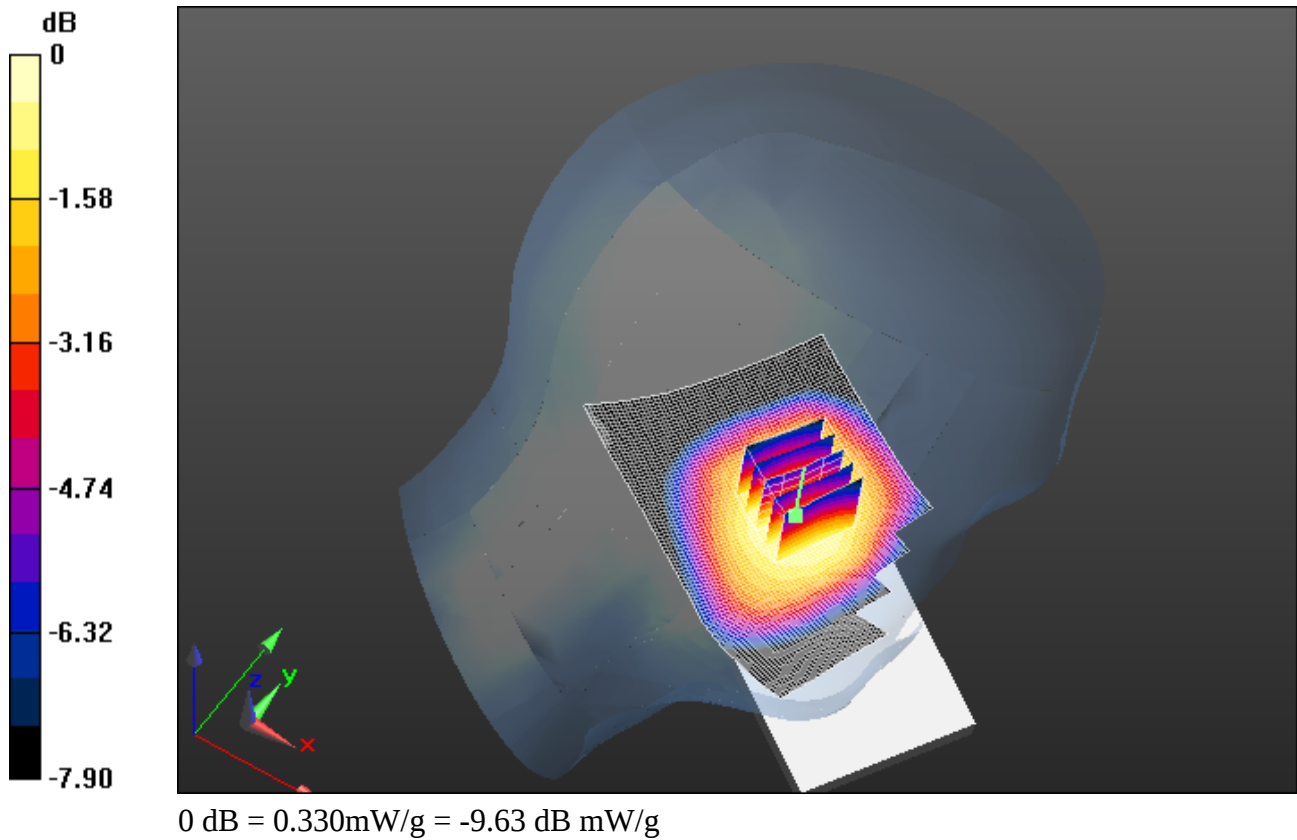

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 16(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/24/2012 7:16:13 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM850_mid_chan_amb_temp_23.8C_liq_temp_22.8C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: GSM 850; Frequency: 836.8 MHz

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.497 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.415 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.6000

SAR(1 g) = 0.457 mW/g; SAR(10 g) = 0.337 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.509 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 17(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

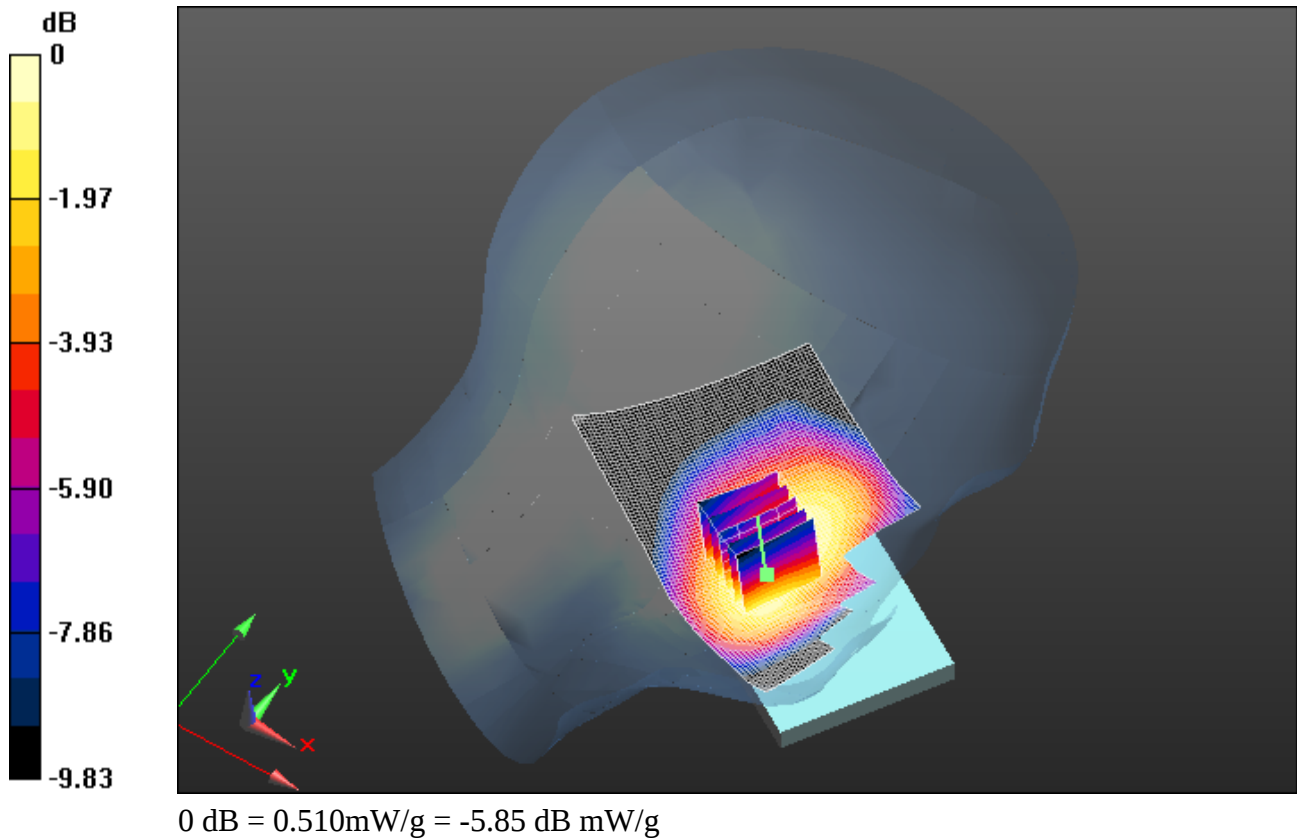

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 18(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 6/4/2012 11:52:32 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_Band_V_mid_chan_amb_temp_23.3C_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 39.928$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.795 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.709 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.8540

SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.548 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.768 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 19(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

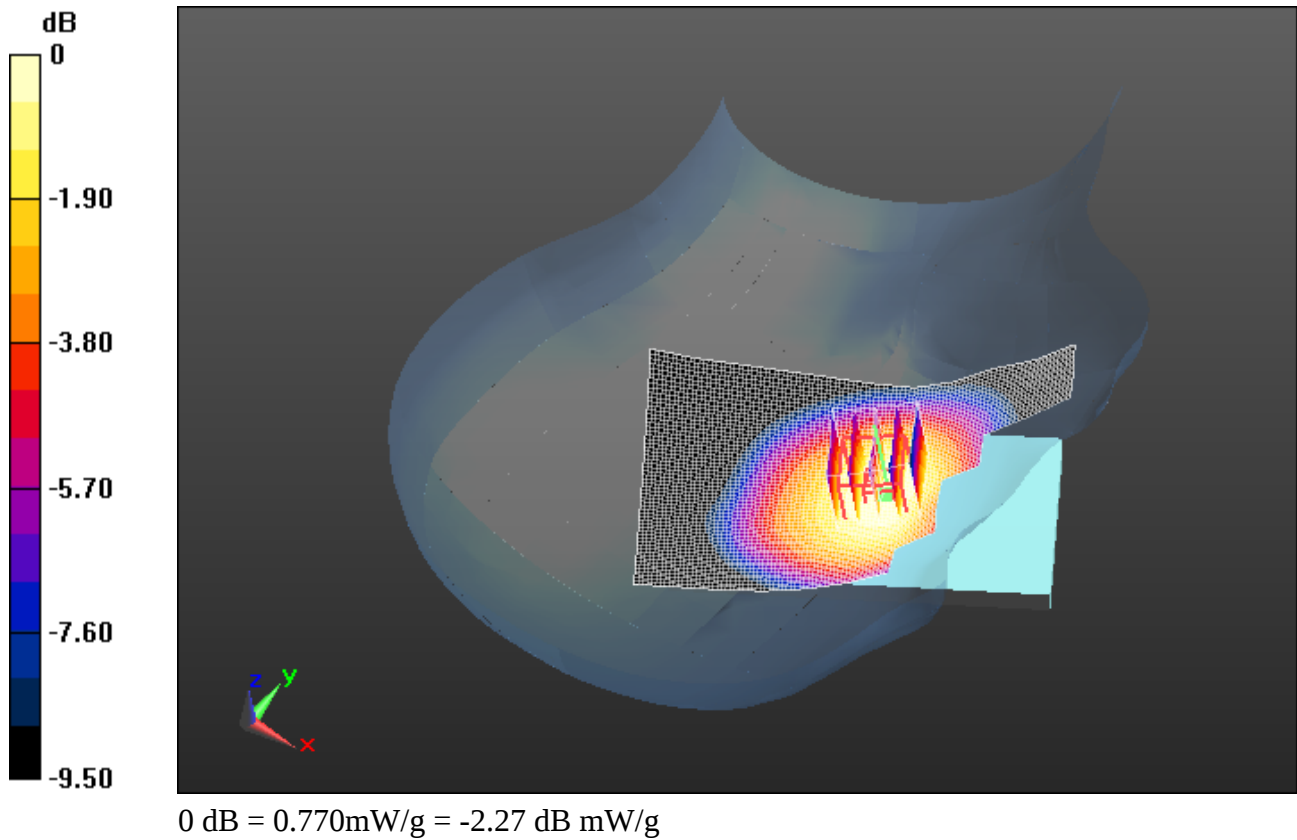

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 20(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 6/5/2012 12:09:19 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_Band_V_mid_chan_amb_temp_23.3C_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 39.928$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.390 mW/g

Configuration/Tilt position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.346 V/m; Power Drift = -0.0043 dB


Peak SAR (extrapolated) = 0.4470

SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.283 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.398 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 21(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

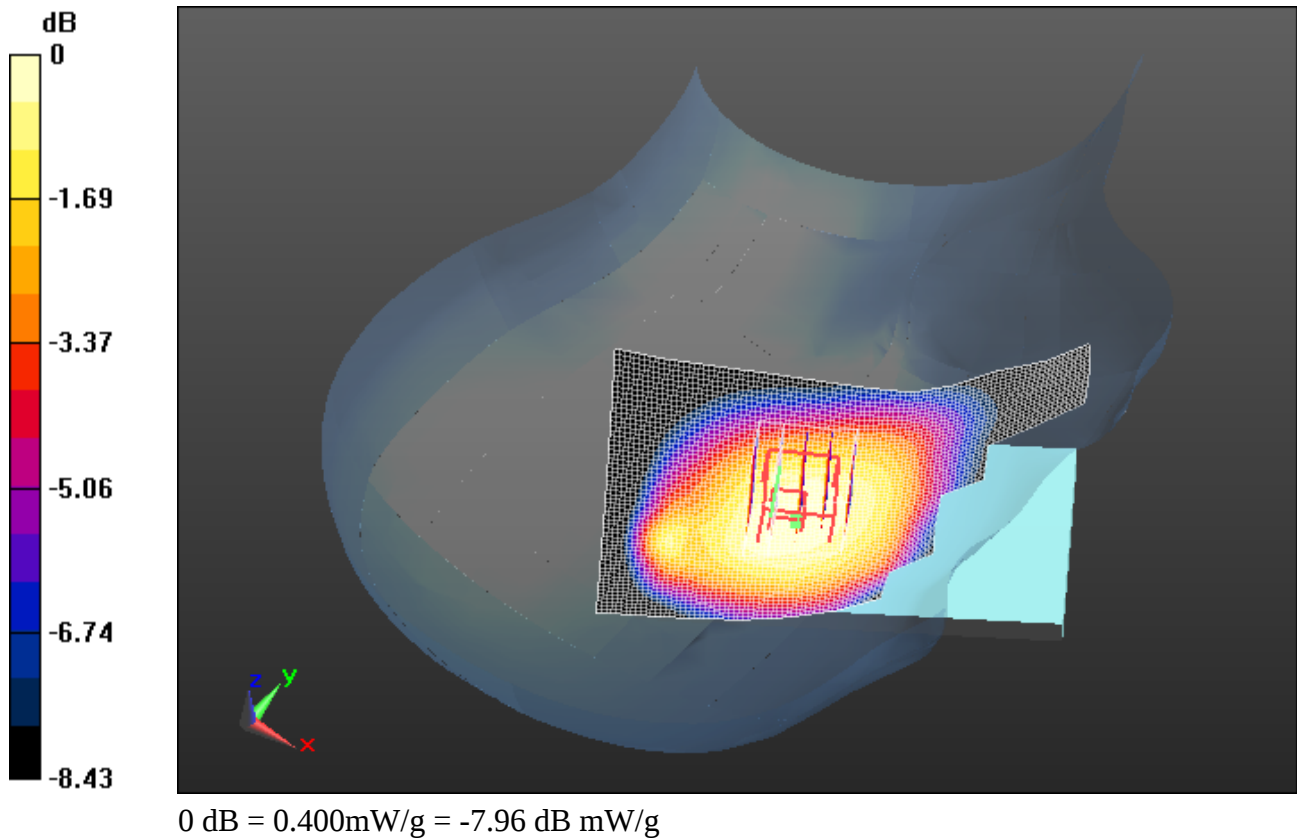

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 22(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 6/4/2012 11:10:45 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_UMTS_Band_V_mid_chan_amb_temp_23.7C_liq_temp_2
1.9C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 39.928$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.714 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.584 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.8510

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.493 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.717 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 23(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

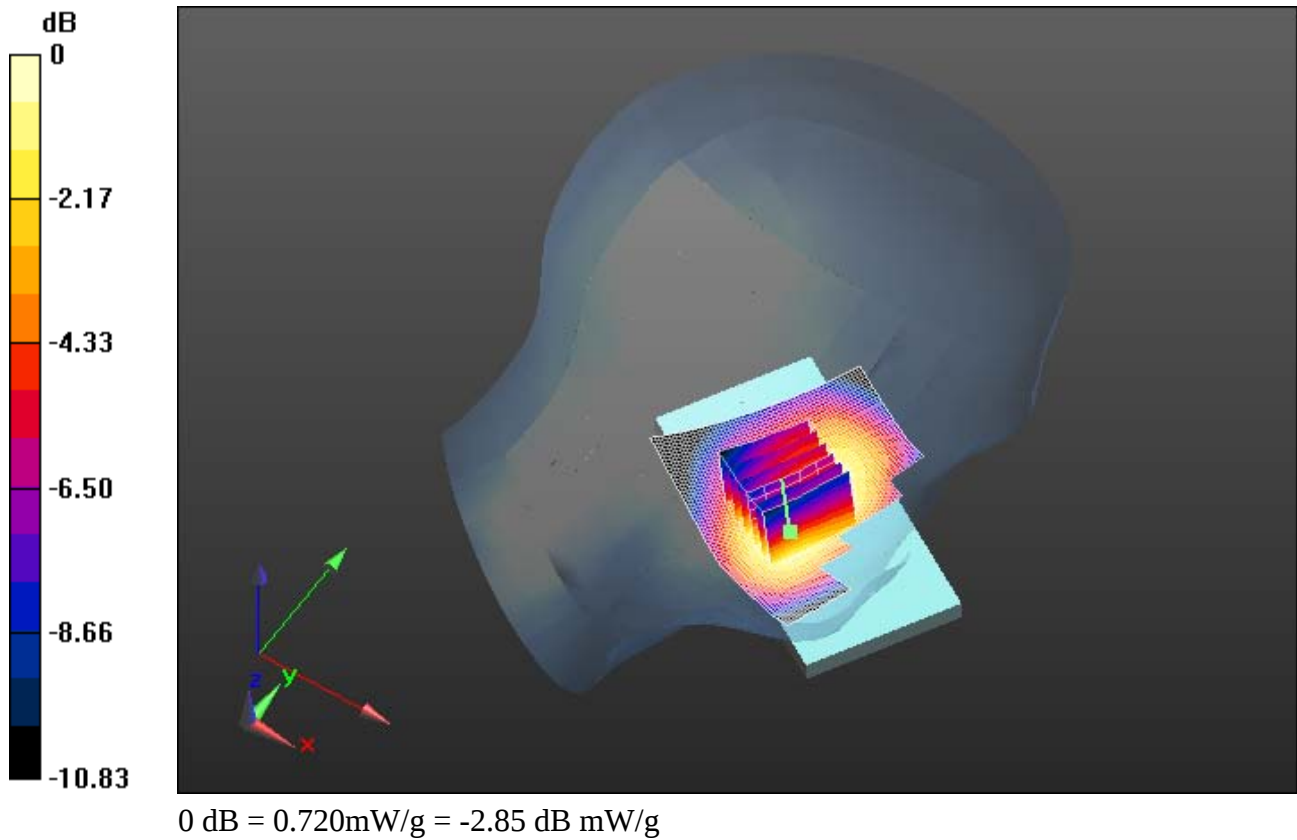

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 24(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 6/4/2012 11:30:12 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_UMTS_Band_V_mid_chan_amb_temp_23.4C_liq_temper_21.9C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 39.928$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.414 mW/g

Configuration/Tilt position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.469 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.4610

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.294 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.415 mW/g

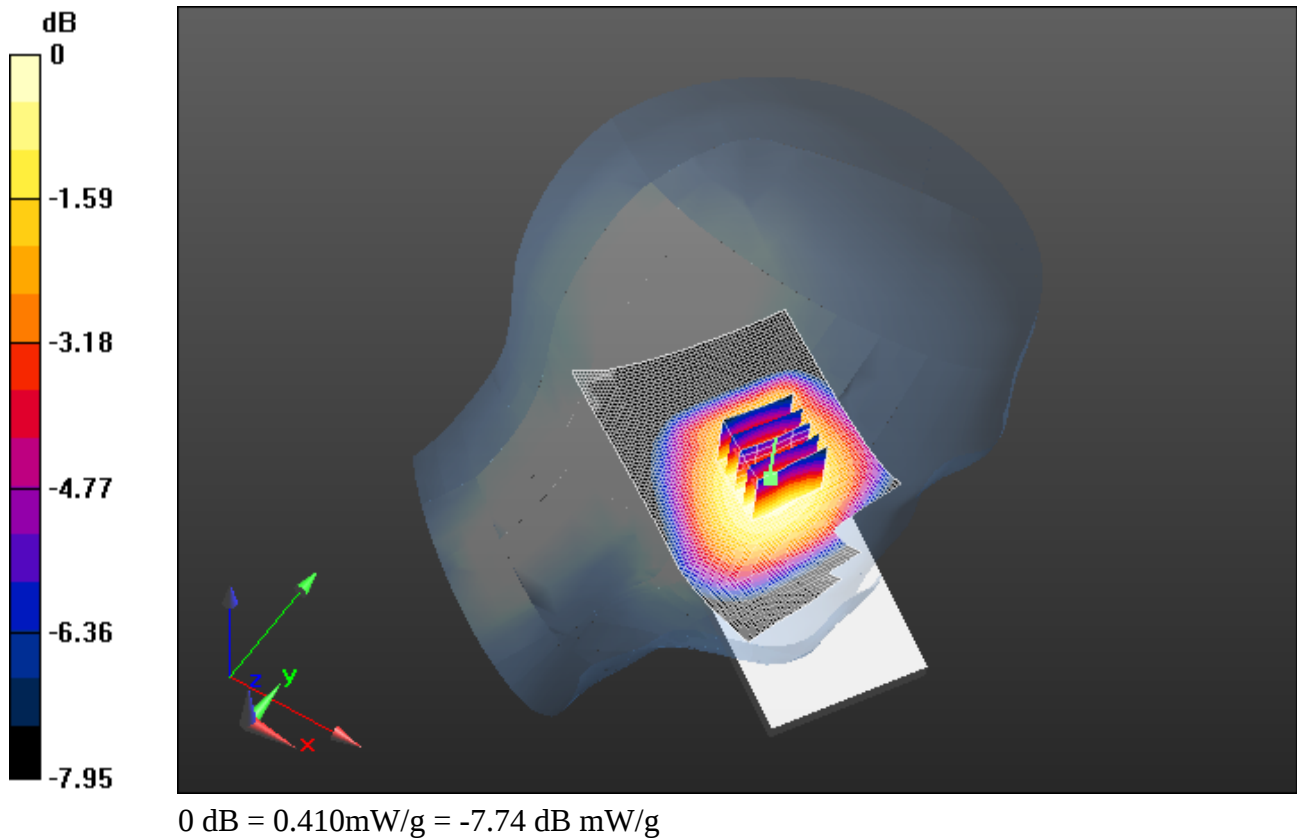

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 26(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/19/2012 4:41:13 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_Band_V_mid_chan_amb_temp_23.1C_liq_temp_22.8C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.729 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.033 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.8000

SAR(1 g) = 0.661 mW/g; SAR(10 g) = 0.507 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.719 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 27(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

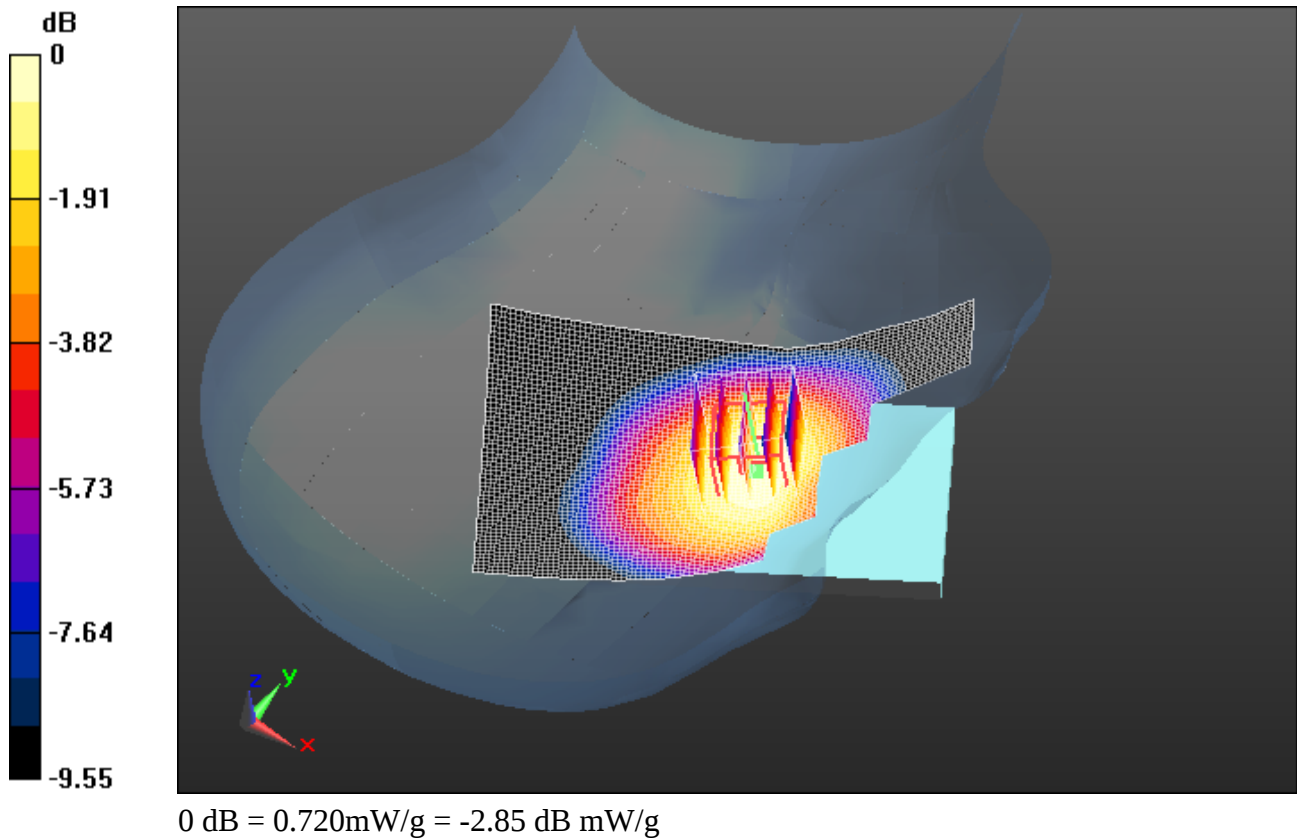

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 28(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/19/2012 4:15:12 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_UMTS_Band_V_mid_chan_amb_temp_23.2C_liq_temp_2
2.8C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.701 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.390 V/m; Power Drift = -0.35 dB


Peak SAR (extrapolated) = 0.8380

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.472 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.699 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 29(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

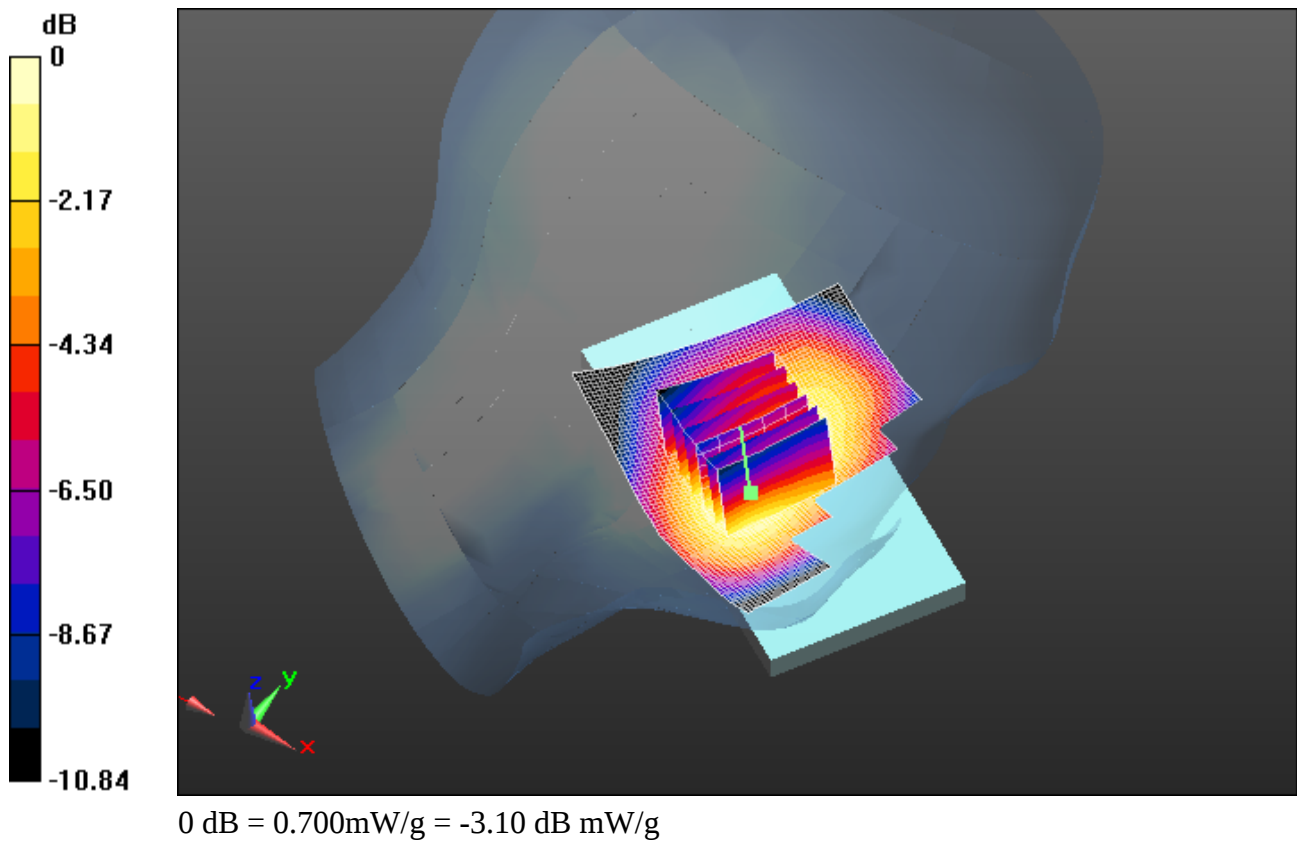

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 30(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 6:04:38 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_mid_chan_amb_temp_23.5C_liq_temp_22.7C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.208 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 5.632 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.2610

SAR(1 g) = 0.178 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 31(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

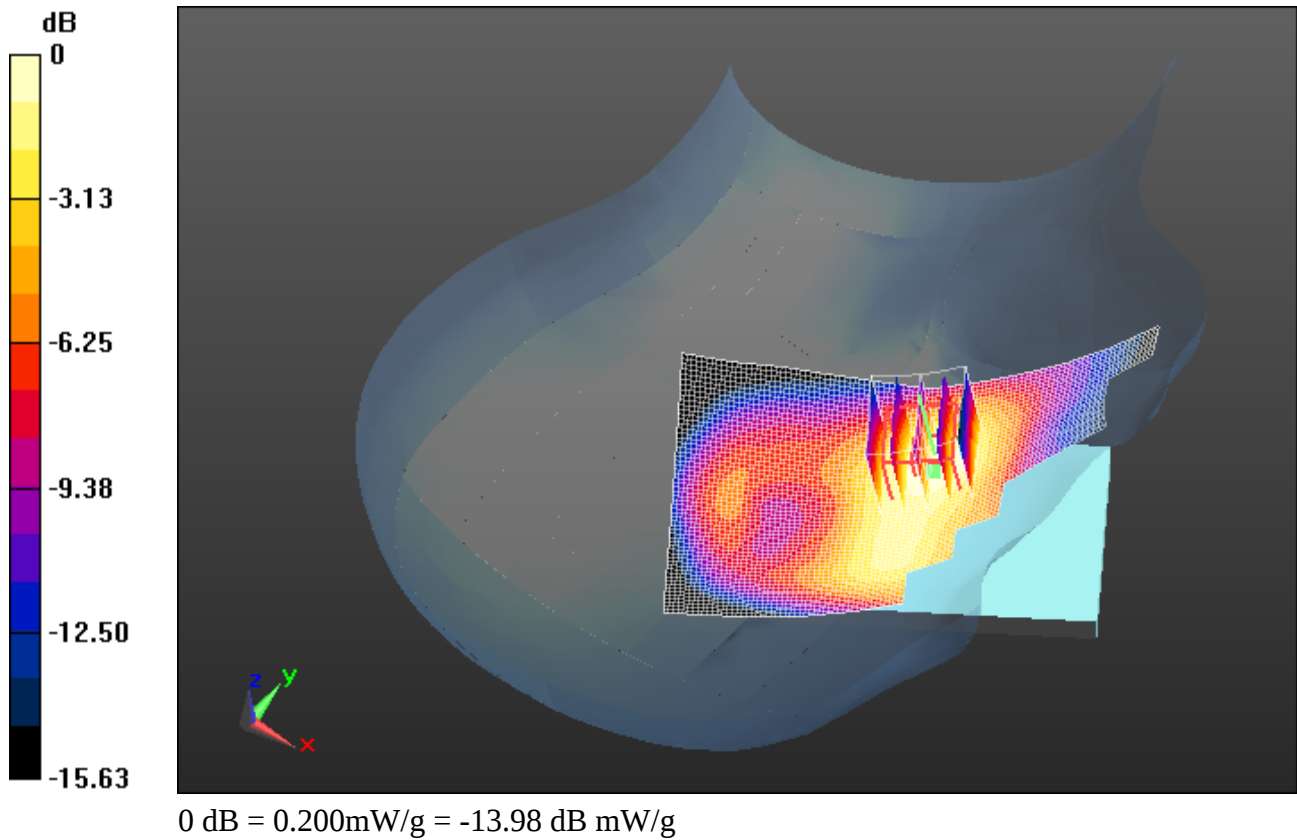

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 32(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 6:53:34 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_EDGE1900_mid_chan_amb_temp_23.0C_liq_temp_22.7C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.077 mW/g

Configuration/Tilt position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:


Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.377 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.1030

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.077 mW/g

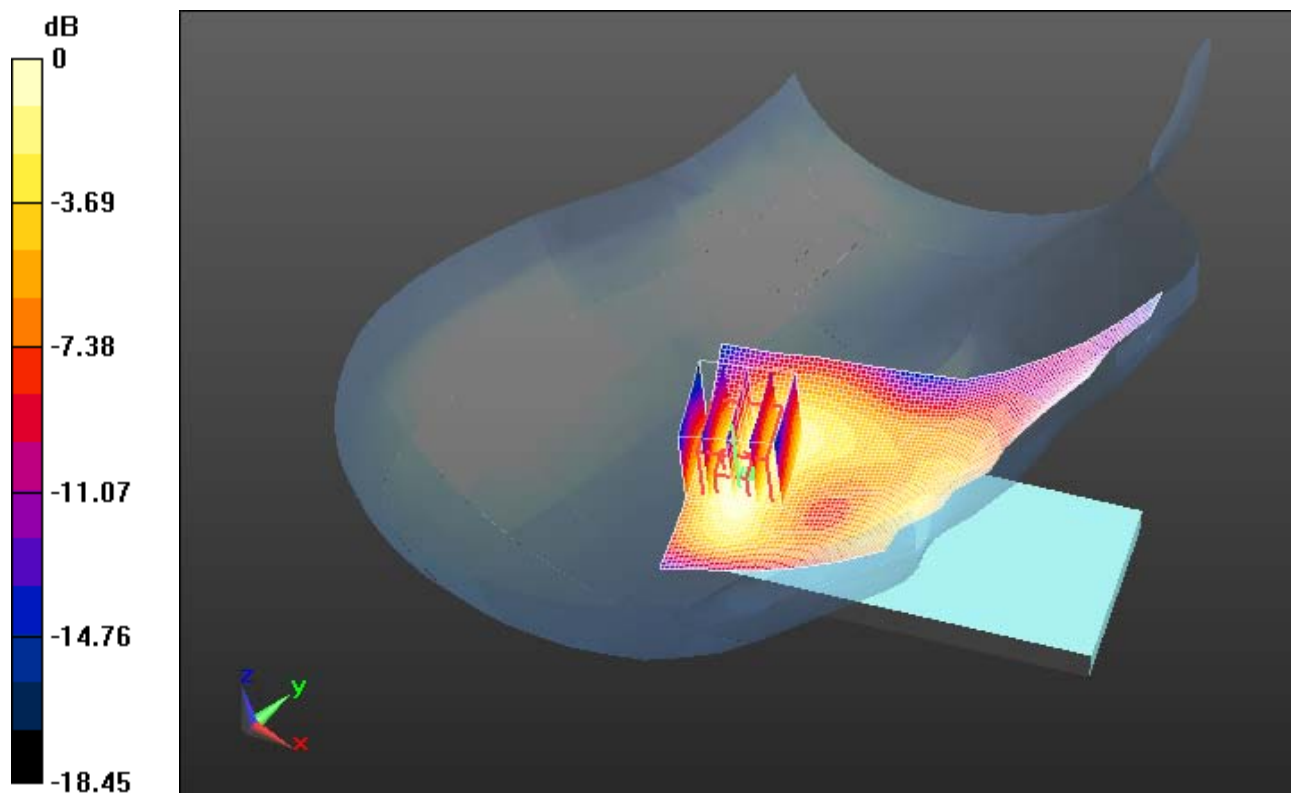

0 dB = 0.080mW/g = -21.94 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 34(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 6:23:53 PM

Test Laboratory: RIM Testing Services

RightHandSide_GSM1900_mid_chan_amb_temp_23.2C_liq_temp_22.7

C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: GSM 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.169 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 4.677 V/m; Power Drift = 0.0086 dB

Peak SAR (extrapolated) = 0.2110

SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 35(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

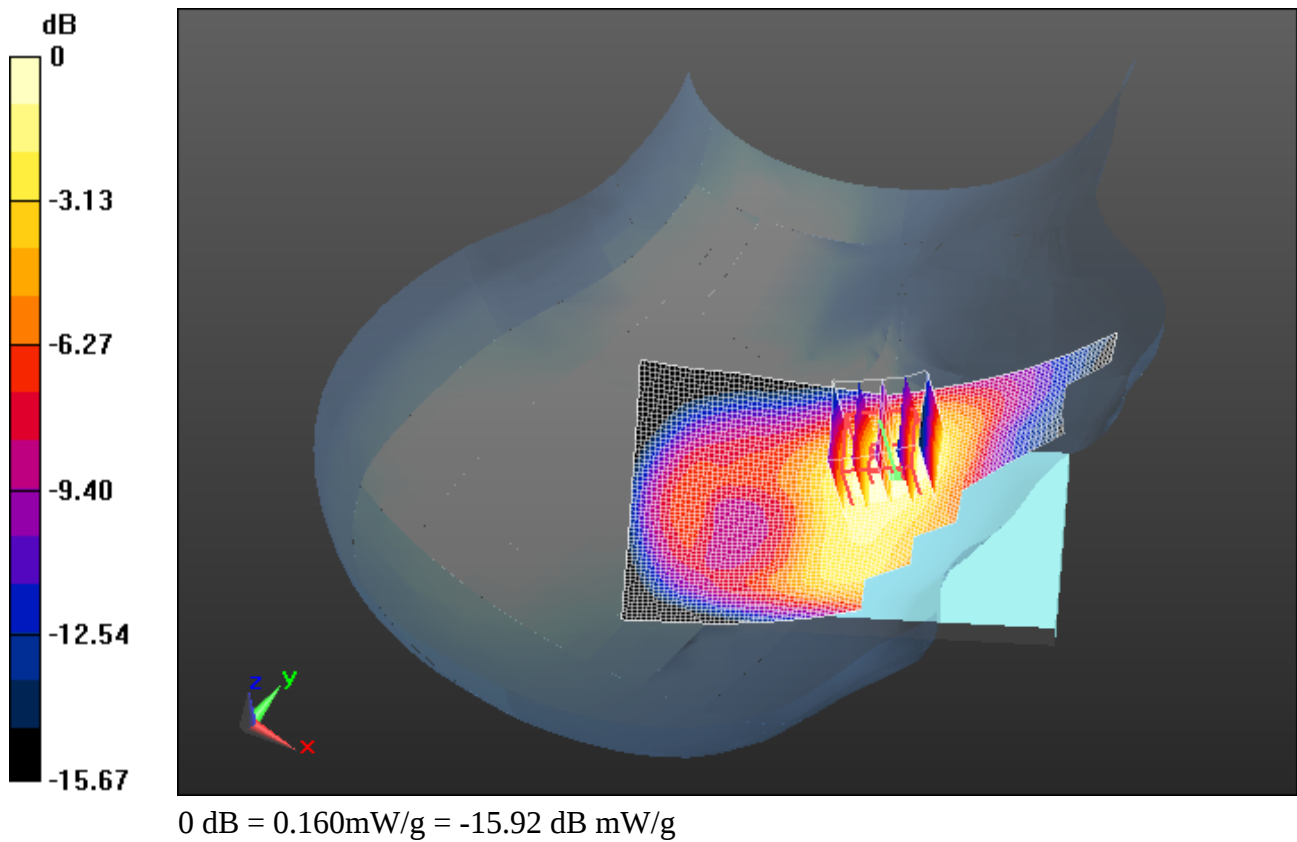

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 36(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 3:22:32 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_EDGE1900_mid_chan_amb_temp_23.5C_liq_temp_22.7
C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.277 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 3.962 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.3820

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 37(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

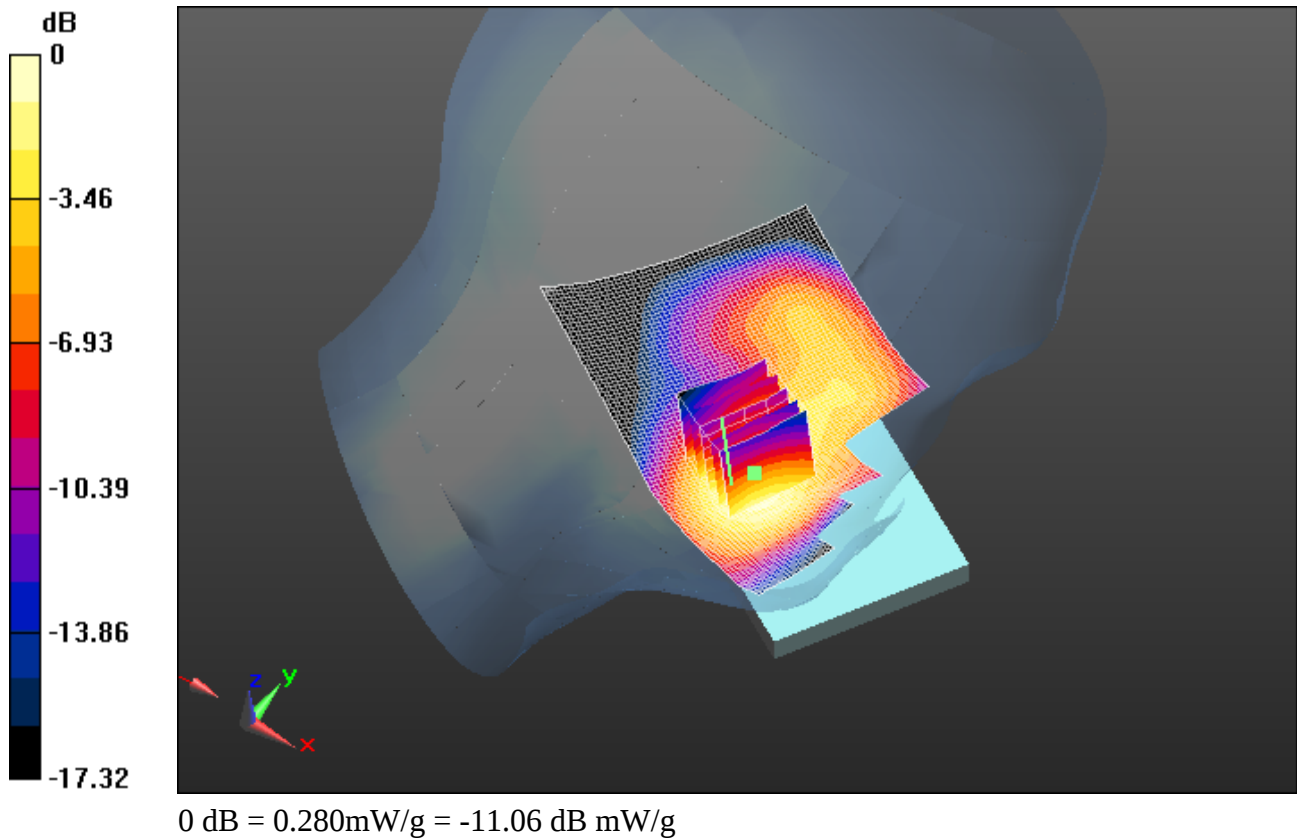

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 38(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 5:02:53 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_EDGE1900_mid_chan_amb_temp_23.5C_liq_temp_2
2.8C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.118 mW/g

Configuration/Tilt position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 6.317 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.1210

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.092 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 39(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

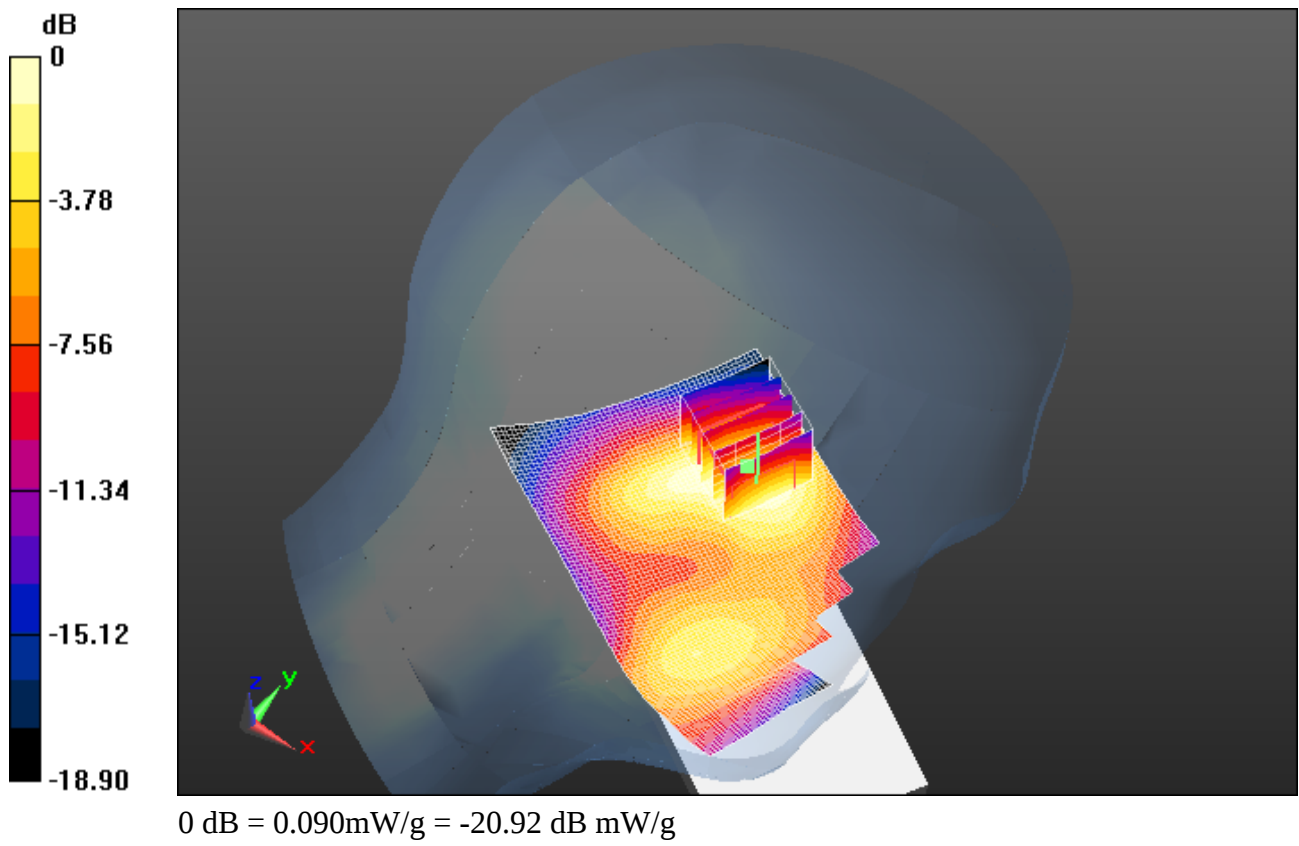

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 40(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 4:43:07 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_mid_chan_amb_temp_23.5C_liq_temp_22.7C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: GSM 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.332 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 4.453 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.4420

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.328 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 41(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

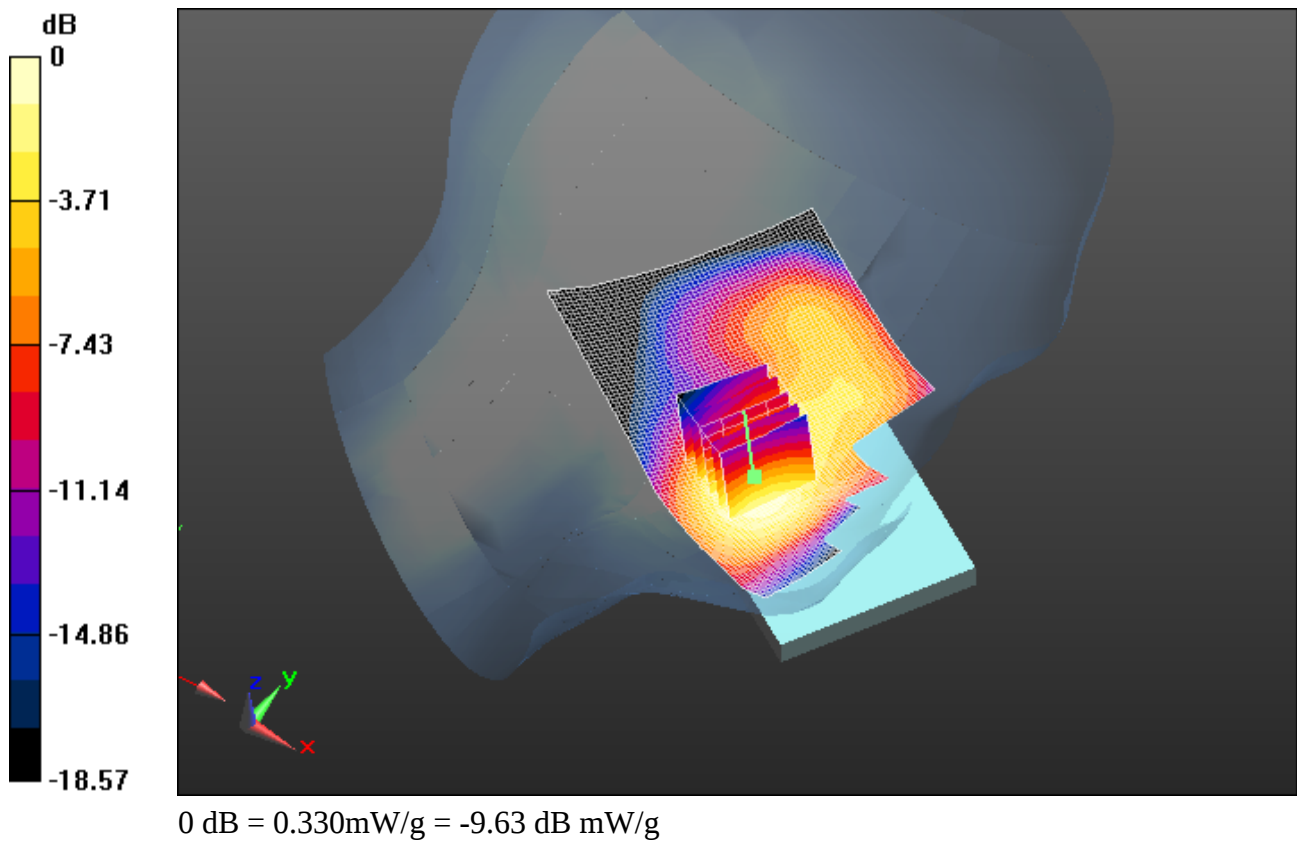

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 42(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 5/29/2012 11:20:56 AM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_Band_II_mid_chan_amb_temp_23.2C_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.354 \text{ mho/m}$; $\epsilon_r = 38.637$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.314 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.674 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.3630

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.286 mW/g

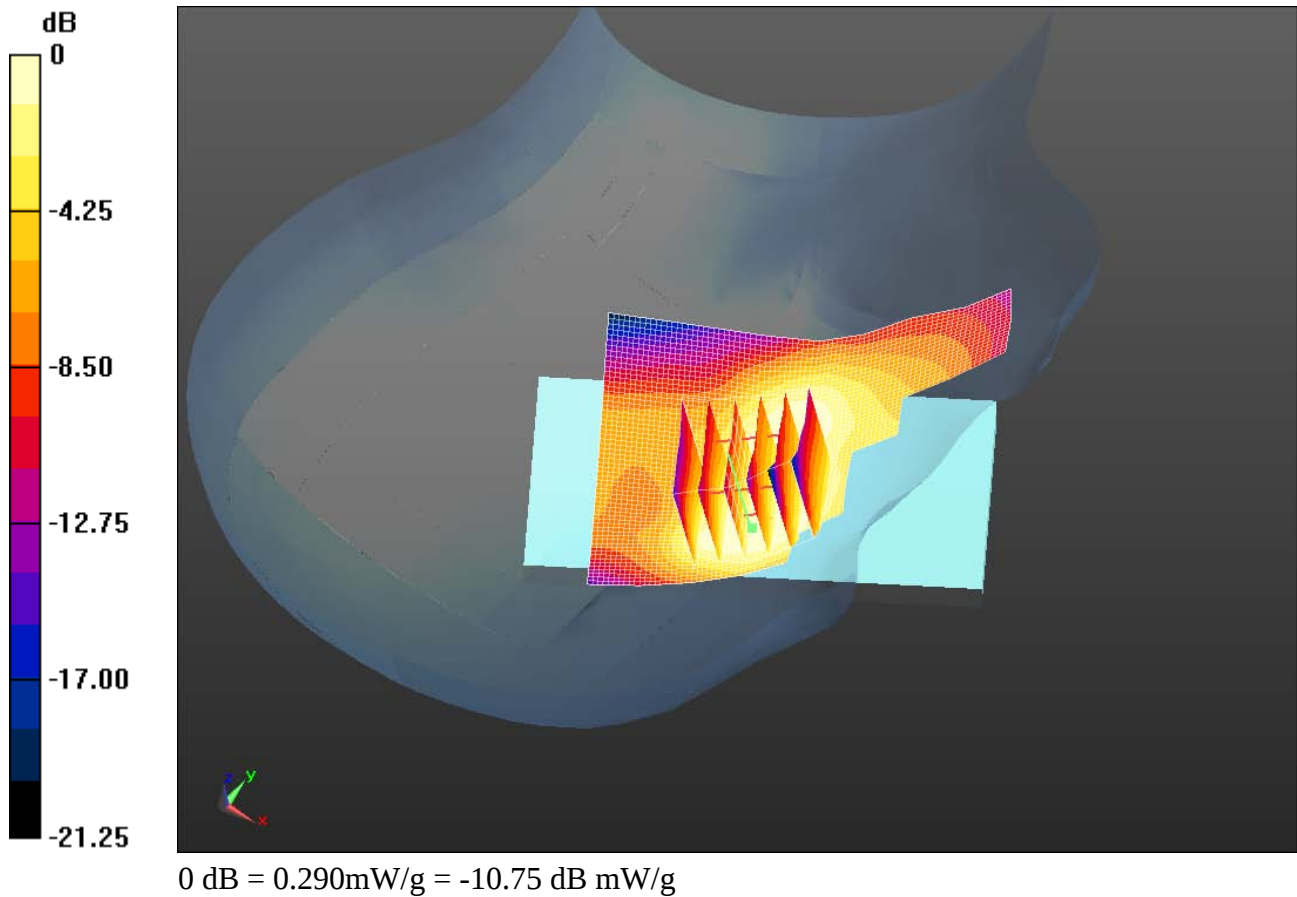

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 44(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 5/29/2012 11:40:54 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_Band_II_mid_chan_amb_temp_23.7C_liq_temper_22.0C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.354 \text{ mho/m}$; $\epsilon_r = 38.637$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.183 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.928 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.2270

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 45(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

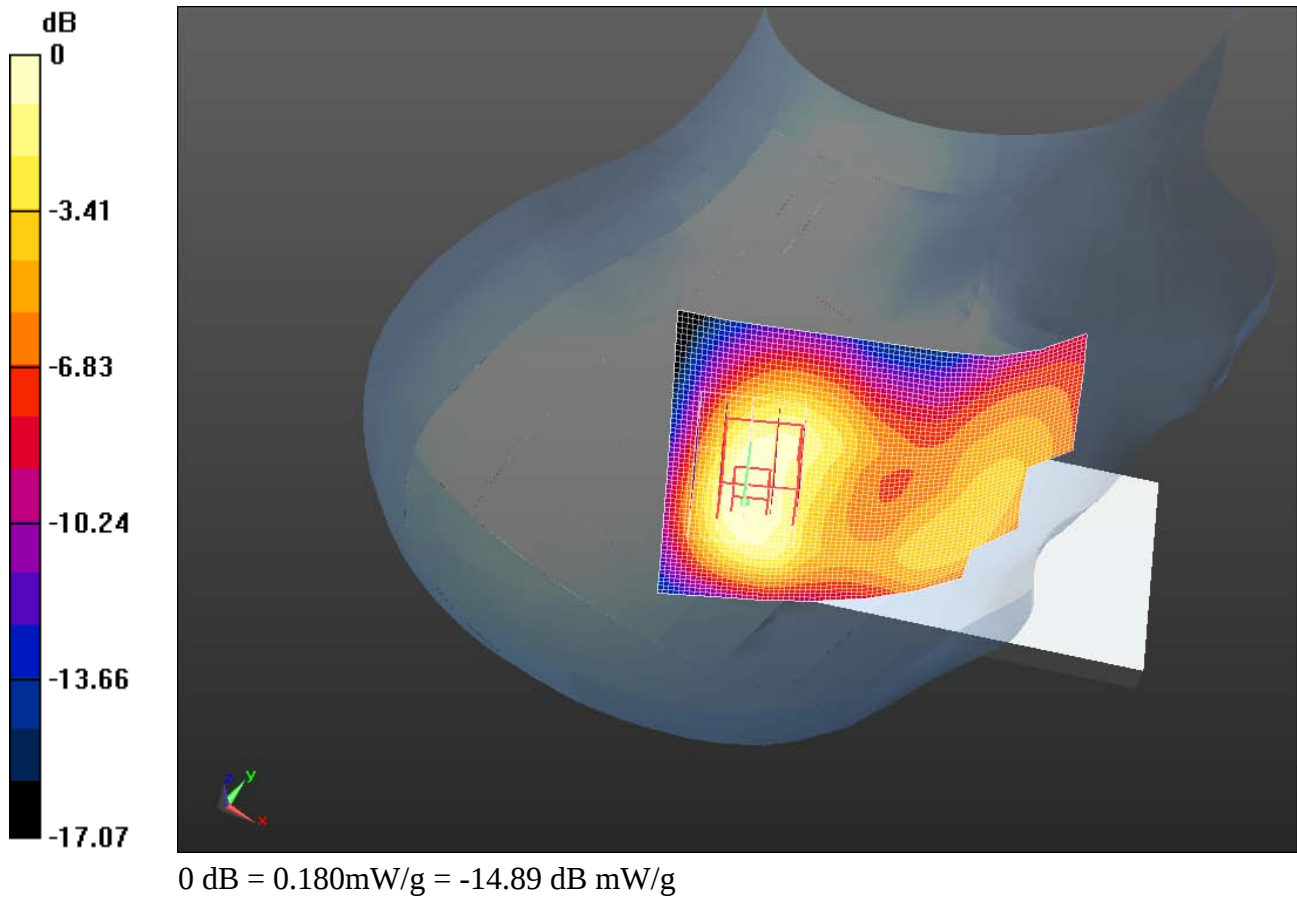

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 46(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 5/29/2012 10:16:54 AM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_Band_II_mid_chan_amb_temp_23.5C_liq_temp_2 2.4C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.354 \text{ mho/m}$; $\epsilon_r = 38.637$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.562 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 5.965 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.7580

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 47(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

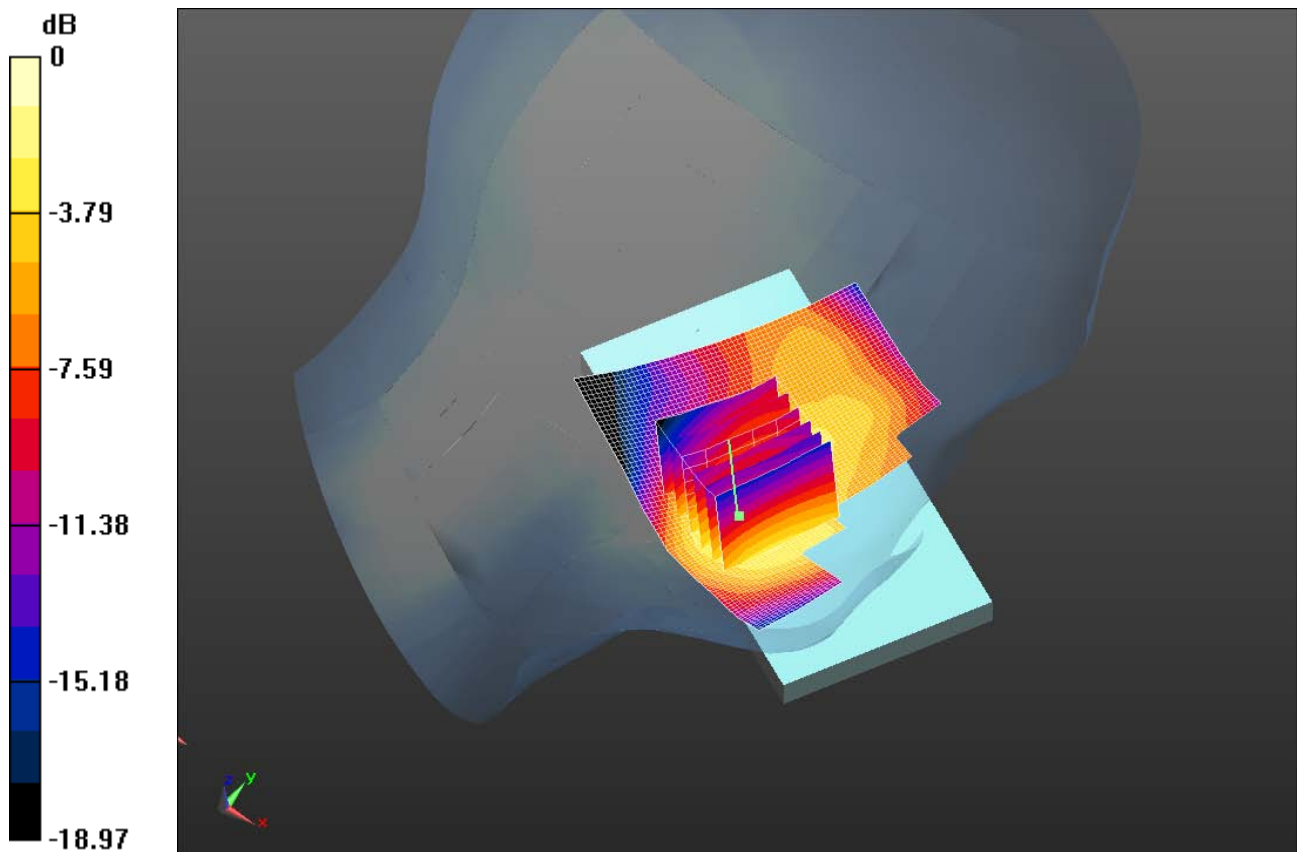

0 dB = 0.580mW/g = -4.73 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 48(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 5/29/2012 10:50:19 AM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_UMTS_Band_II_mid_chan_amb_temp_23.1C_liq_tem
p_22.5C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A099B03

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.354 \text{ mho/m}$; $\epsilon_r = 38.637$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.270 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x6x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.836 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.2980

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.233 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 49(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

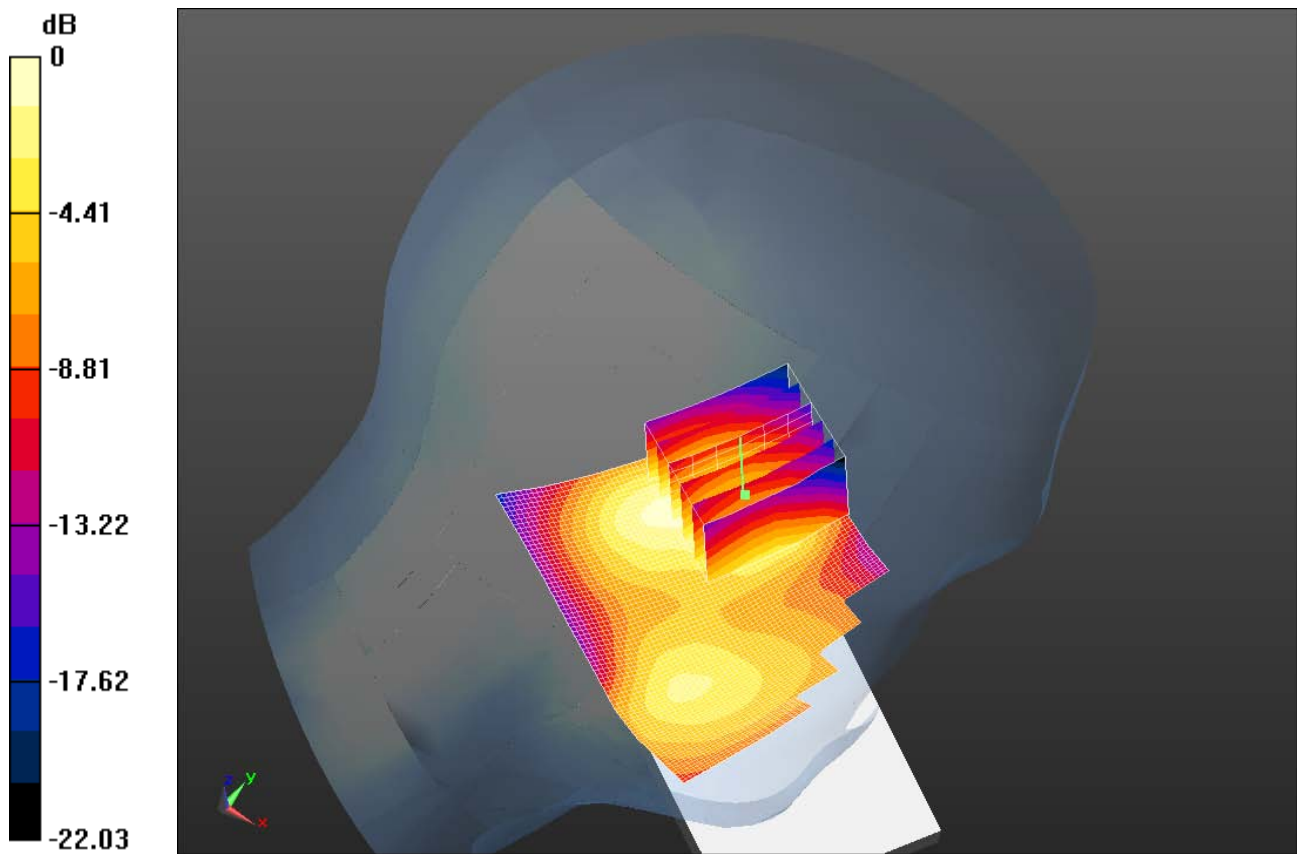

0 dB = 0.230mW/g = -12.77 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 50(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 10:06:46 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_Band_II_mid_chan_amb_temp_23.2C_liq_temp_22.4C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.549 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 9.533 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.7000

SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.524 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 51(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

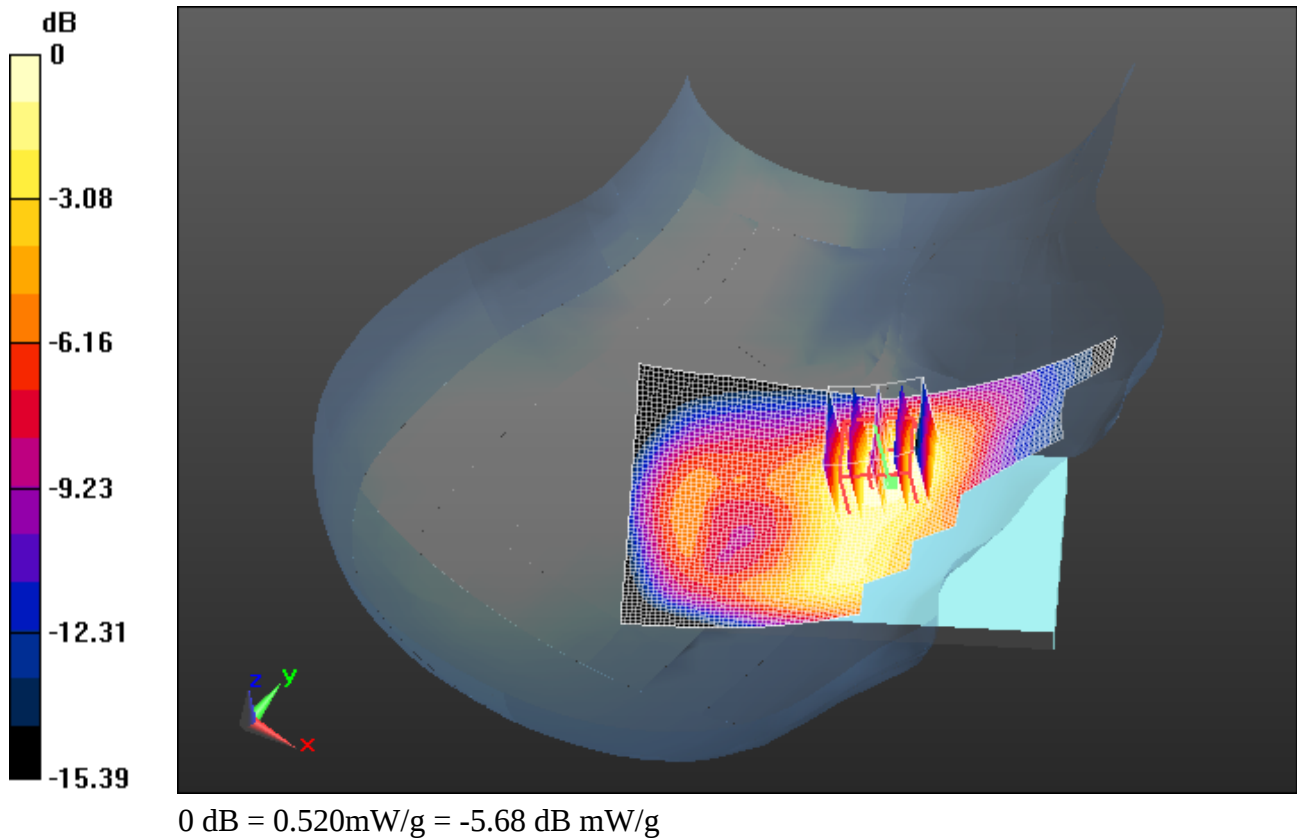

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 52(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/31/2012 4:05:59 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_Band_II_mid_chan_amb_temp_23.5C_liq_temp_2 2.7C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ mho/m}$; $\epsilon_r = 38.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.697 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 6.677 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.8920

SAR(1 g) = 0.586 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 0.669 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 53(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

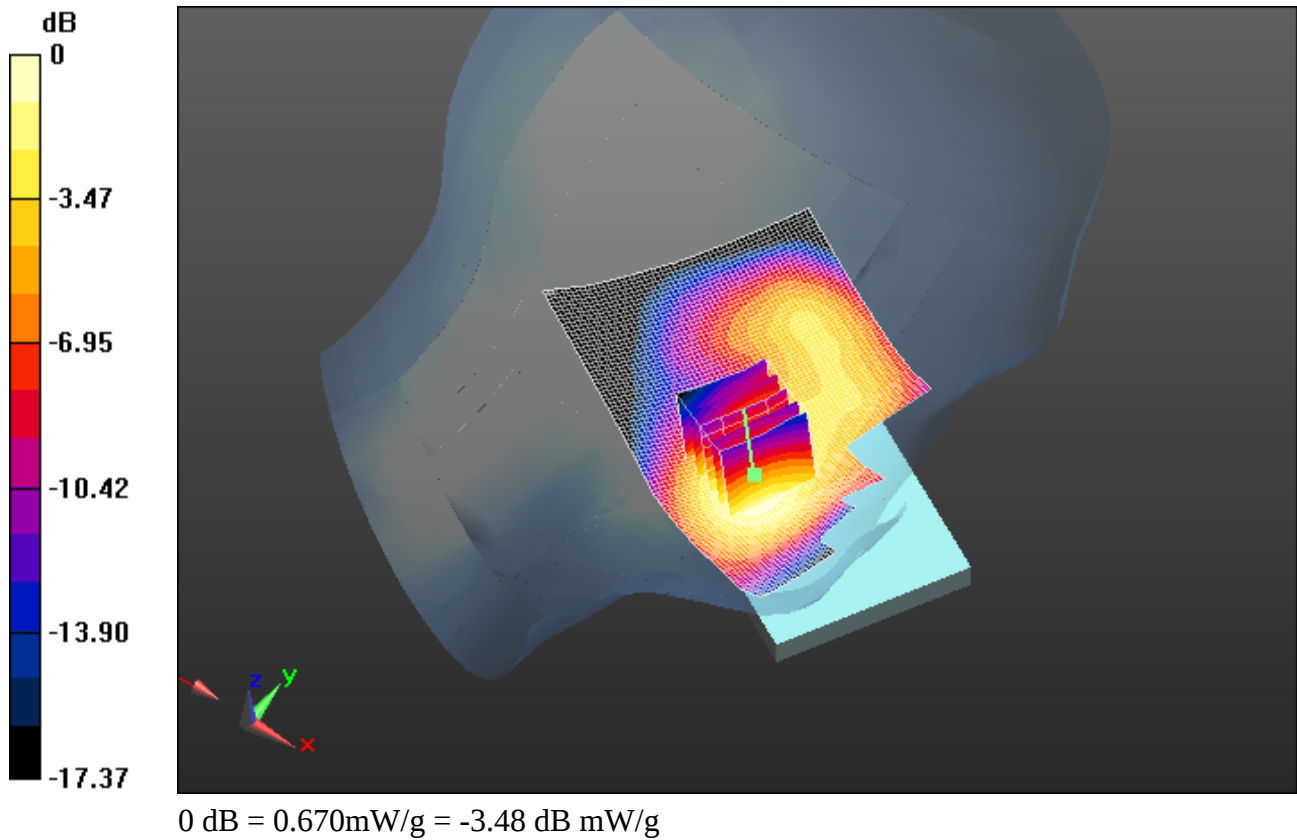

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 54(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/23/2012 4:49:33 PM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_mid_chan_amb_temp_24.2C_liq_temp_23.1C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.735$ mho/m; $\epsilon_r = 37.55$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.5, 4.5, 4.5); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.404 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.310 V/m; Power Drift = 0.36 dB


Peak SAR (extrapolated) = 0.7090

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.155 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.426 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 55(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

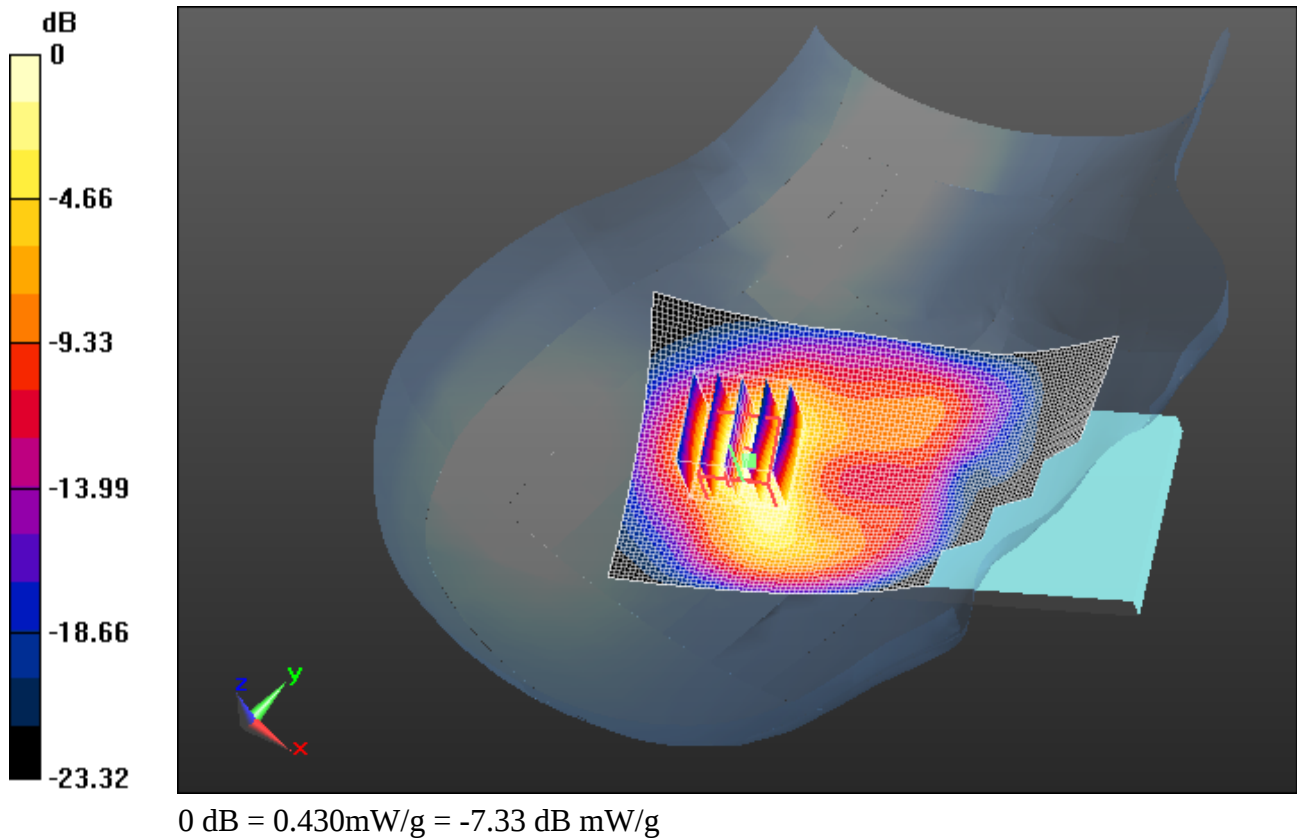

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 56(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/23/2012 5:11:23 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_802.11b_mid_chan_amb_temp_24.1C_liq_temp_23.1C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.735$ mho/m; $\epsilon_r = 37.55$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.5, 4.5, 4.5); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x81x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.371 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 13.466 V/m; Power Drift = -0.29 dB

Peak SAR (extrapolated) = 0.6070

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.144 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.382 mW/g

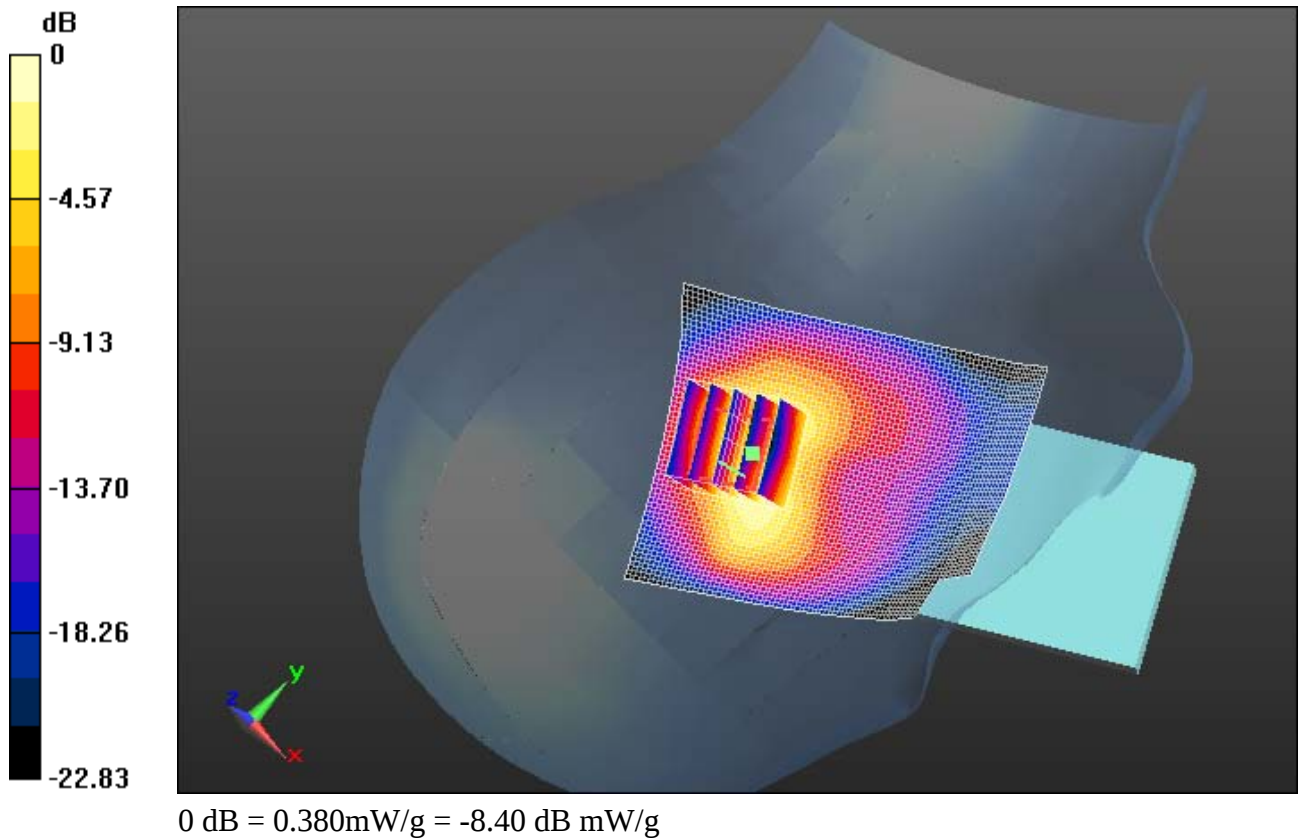

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 58(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/23/2012 3:55:09 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_mid_chan_amb_temp_23.8C_liq_temp_23.1C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.735$ mho/m; $\epsilon_r = 37.55$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.5, 4.5, 4.5); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (51x91x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.606 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.638 V/m; Power Drift = 0.004 dB


Peak SAR (extrapolated) = 0.8770

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.193 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.504 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 59(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

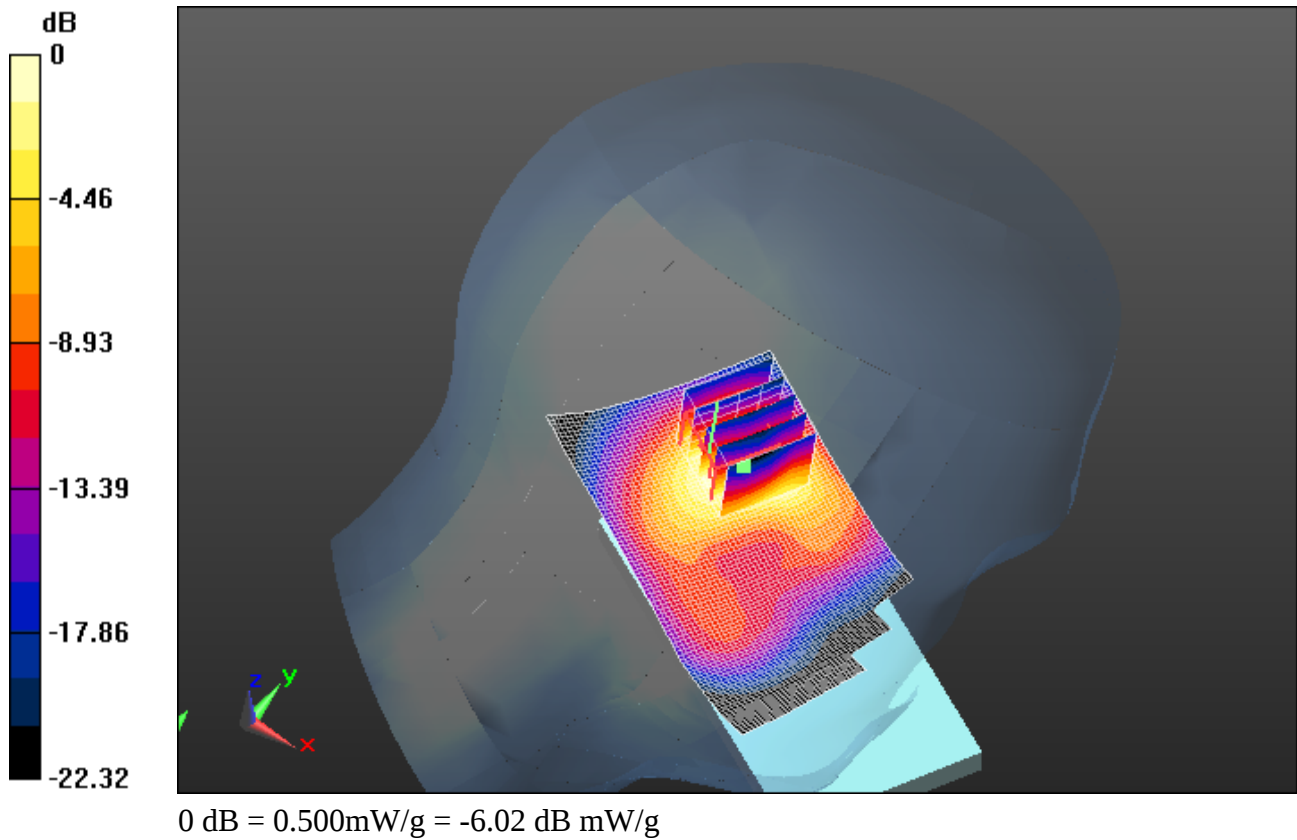

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 60(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 7/23/2012 4:14:57 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11b_mid_chan_amb_temp_24.1C_liq_temp_23.1C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.735$ mho/m; $\epsilon_r = 37.55$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.5, 4.5, 4.5); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.751 mW/g

Configuration/Tilt position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.161 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.9930

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.218 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.590 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 61(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

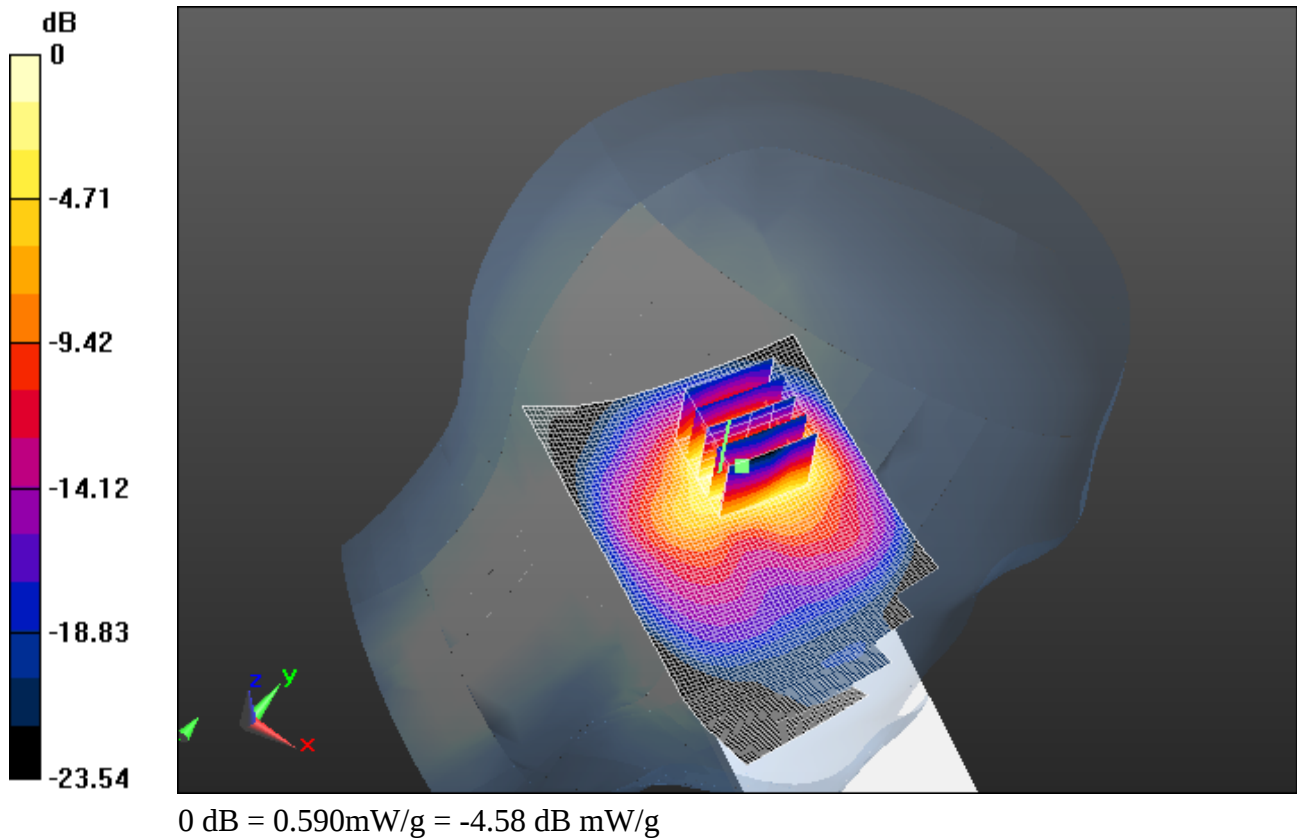

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 62(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/16/2012 12:41:38 PM

Test Laboratory: RIM Testing Services

**RightHandSide_802.11a_low_band_chan_36_amb_temp_23.5C_liq_tem
p_22.8C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5180 MHz

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.764 \text{ mho/m}$; $\epsilon_r = 34.626$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.89, 4.89, 4.89); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.957 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (9x9x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 16.741 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.3360

SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 1.162 mW/g

Configuration/Touch position 2 -/Zoom Scan 2 (7x7x9) (13x10x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 16.741 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.3010

SAR(1 g) = 0.595 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 1.185 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 63(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

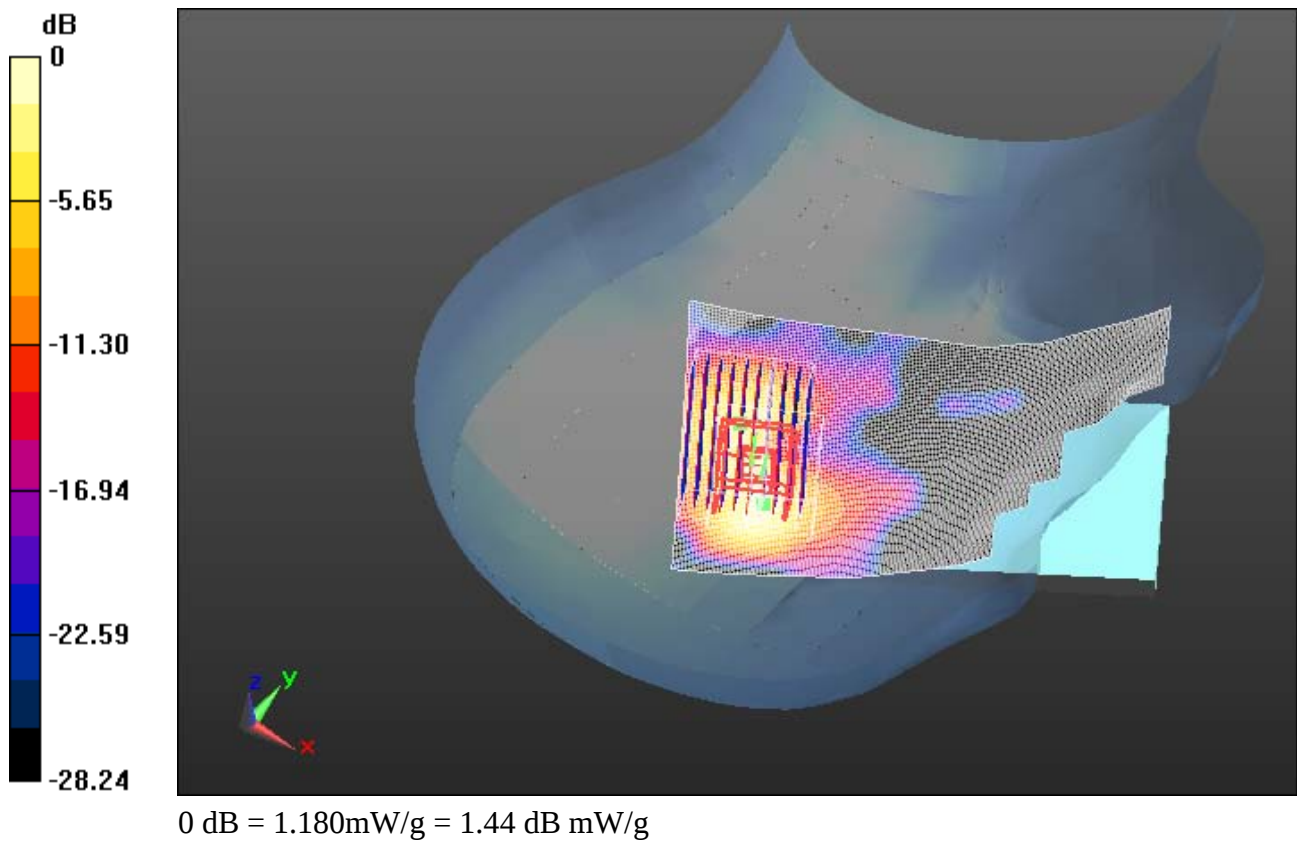

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 64(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/16/2012 10:54:25 AM

Test Laboratory: RIM Testing Services

**RightHandSide_802.11a_mid_band_chan_52_amb_temp_23.5C_liq_tem
p_22.8C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5260 MHz

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.851 \text{ mho/m}$; $\epsilon_r = 34.447$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.89, 4.89, 4.89); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.582 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (11x9x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 11.926 V/m; Power Drift = 0.57 dB

Peak SAR (extrapolated) = 1.4470

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (measured) = 0.738 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 65(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

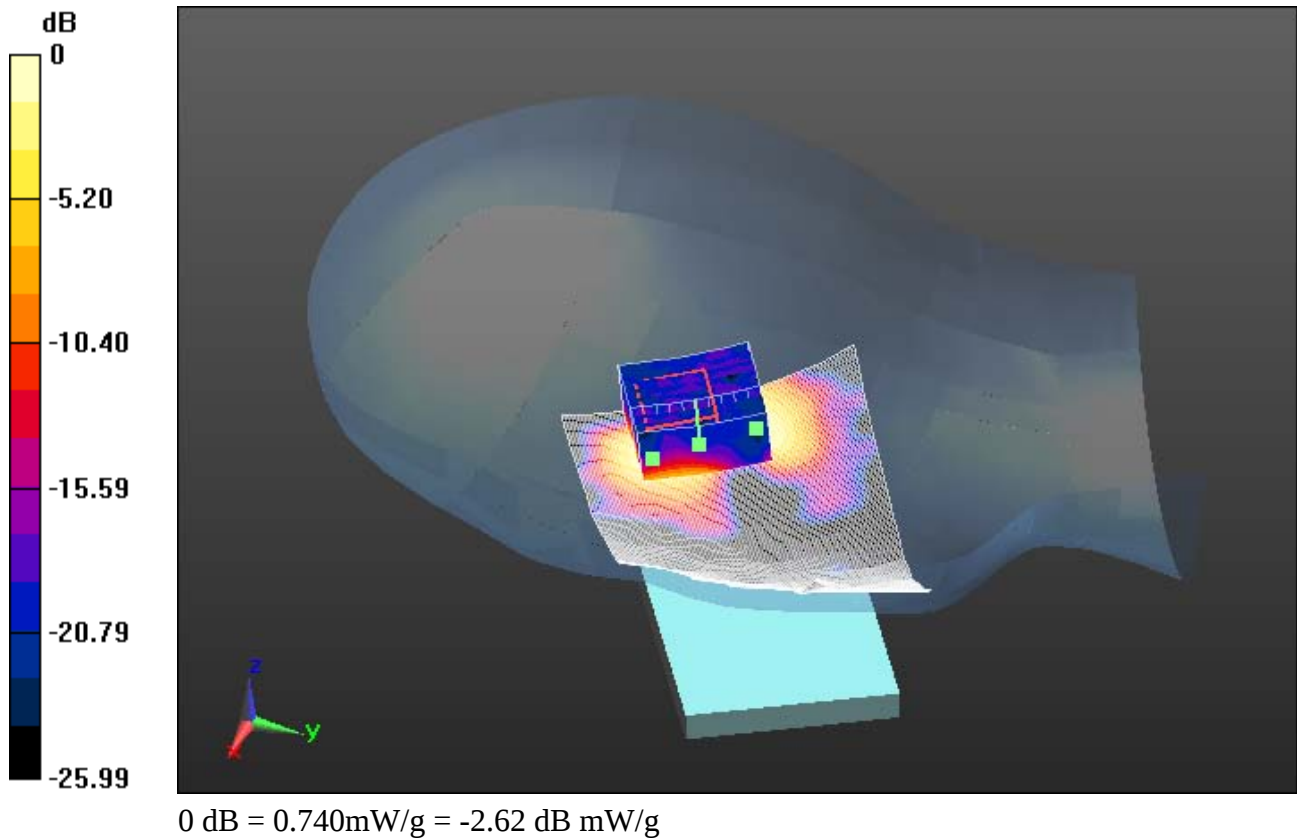

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 66(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/16/2012 10:03:53 AM

Test Laboratory: RIM Testing Services

**RightHandSide_802.11a_upper_band_l_chan_104_amb_temp_23.1C_li
q_temp_22.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5520 MHz

Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 5.085 \text{ mho/m}$; $\epsilon_r = 33.99$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.38, 4.38, 4.38); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.646 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (9x9x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 11.514 V/m; Power Drift = 0.24 dB

Peak SAR (extrapolated) = 1.3300

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.719 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 67(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

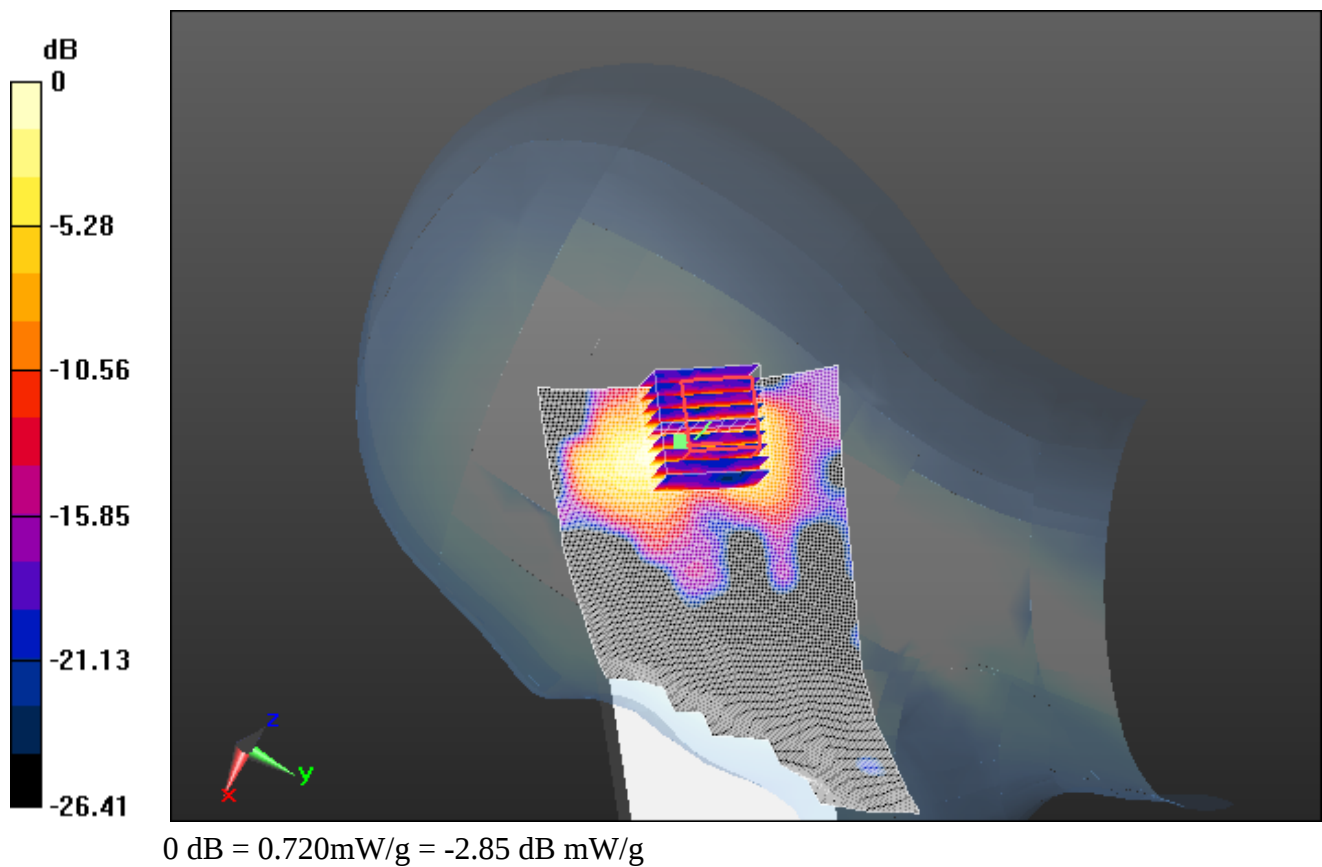

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 68(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 11:21:54 PM

Test Laboratory: RIM Testing Services

**RightHandSide_802.11a_upper_band_II_chan_149_amb_temp_23.3C_li
q_temp_21.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5745 MHz

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.452 \text{ mho/m}$; $\epsilon_r = 34.333$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.046 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (9x9x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 12.511 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.0580

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 1.070 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 69(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

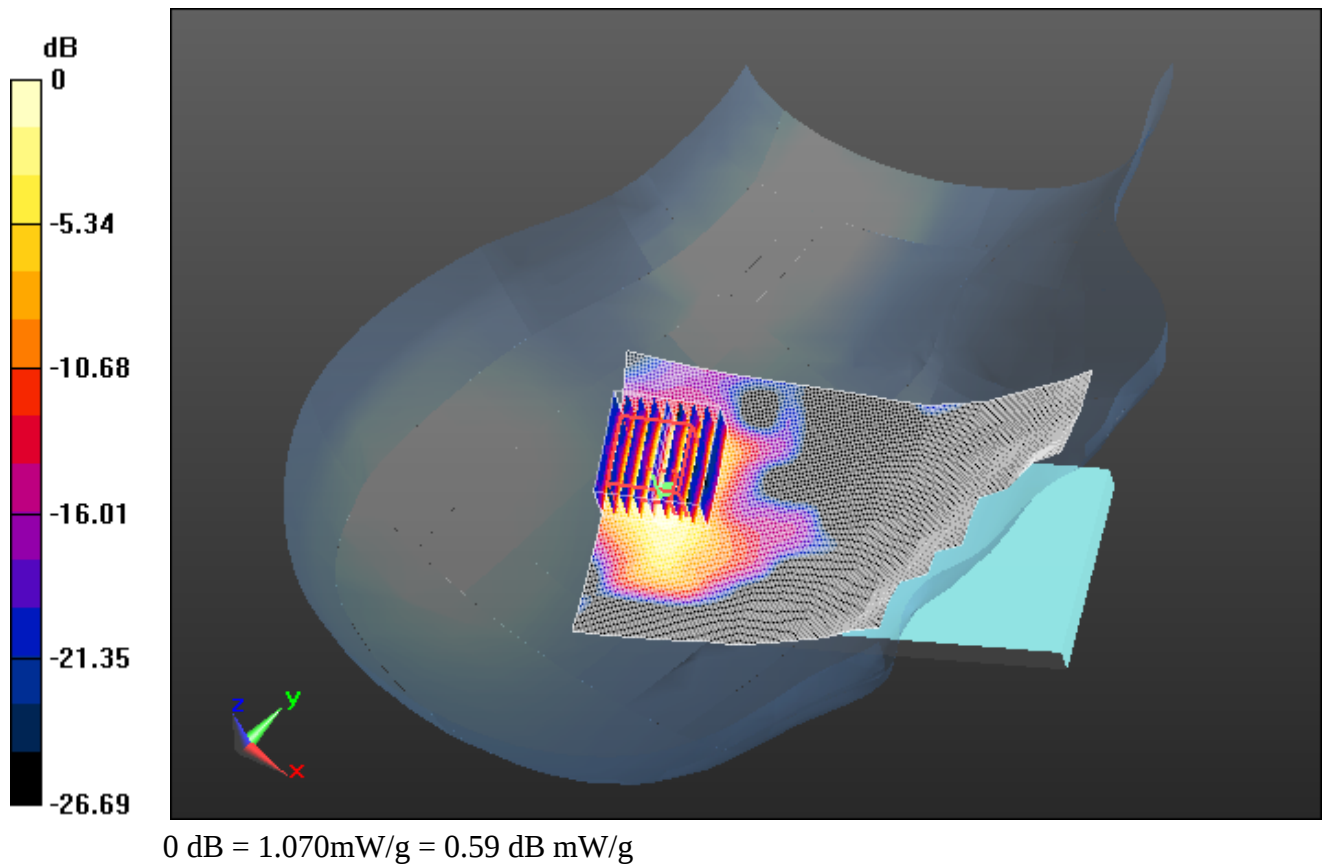

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 70(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/16/2012 2:28:44 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_802.11a_low_band_chan_36_amb_temp_23.1C_liq
_temp_22.7C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5180 MHz

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.764 \text{ mho/m}$; $\epsilon_r = 34.626$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position 2 -/Area Scan (91x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.099 mW/g

Configuration/Tilt position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 14.748 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.1710

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 1.208 mW/g

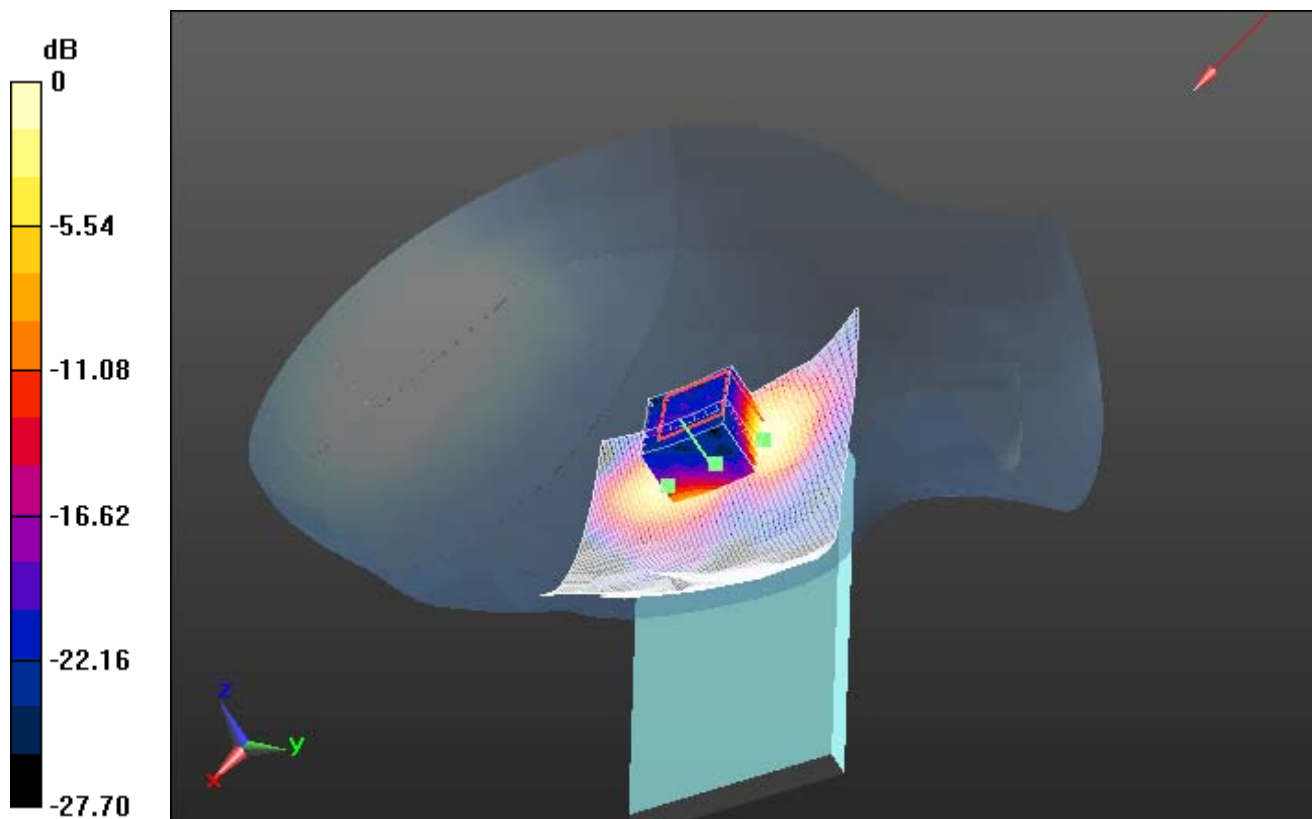

0 dB = 1.210mW/g = 1.66 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 72(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/16/2012 3:52:50 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_802.11a_mid_band_chan_52_amb_temp_23.1C_liq
_temp_22.7C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5260 MHz

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.851$ mho/m; $\epsilon_r = 34.447$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position 2 -/Area Scan (91x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.832 mW/g

Configuration/Tilt position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 13.332 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.3000

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.743 mW/g

Configuration/Tilt position 2 -/Zoom Scan 2 (7x7x9) (14x11x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm


Reference Value = 13.332 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.6360

SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.754 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 73(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

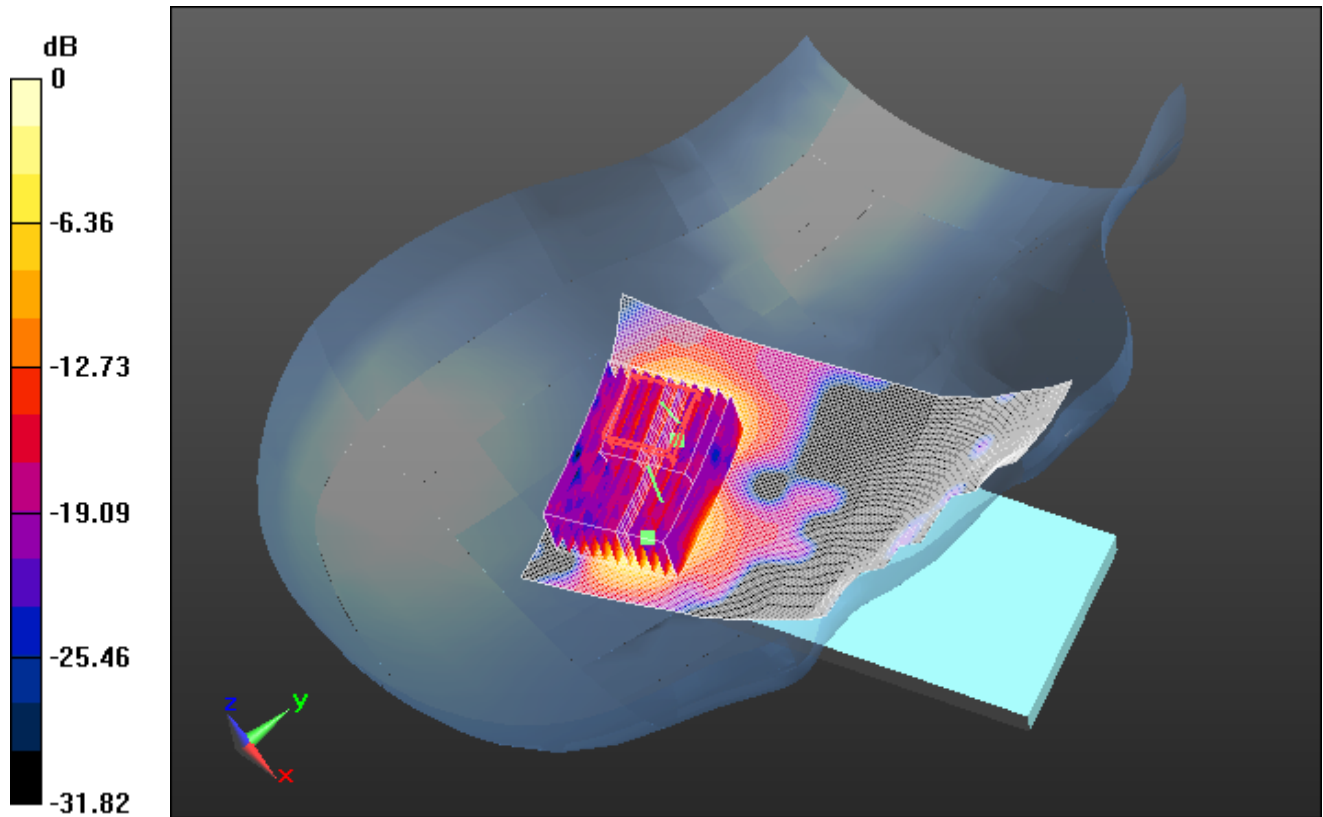

0 dB = 0.750mW/g = -2.50 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 74(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/16/2012 5:42:18 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_802.11a_upper_band_l_chan_104_amb_temp_23.0
C_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5520 MHz
Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 5.085 \text{ mho/m}$; $\epsilon_r = 33.99$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position 2 -/Area Scan (91x161x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.882 mW/g

Configuration/Tilt position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:
Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
Reference Value = 13.356 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.4460
SAR(1 g) = 0.423 mW/g; SAR(10 g) = 0.168 mW/g
Maximum value of SAR (measured) = 0.789 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 75(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

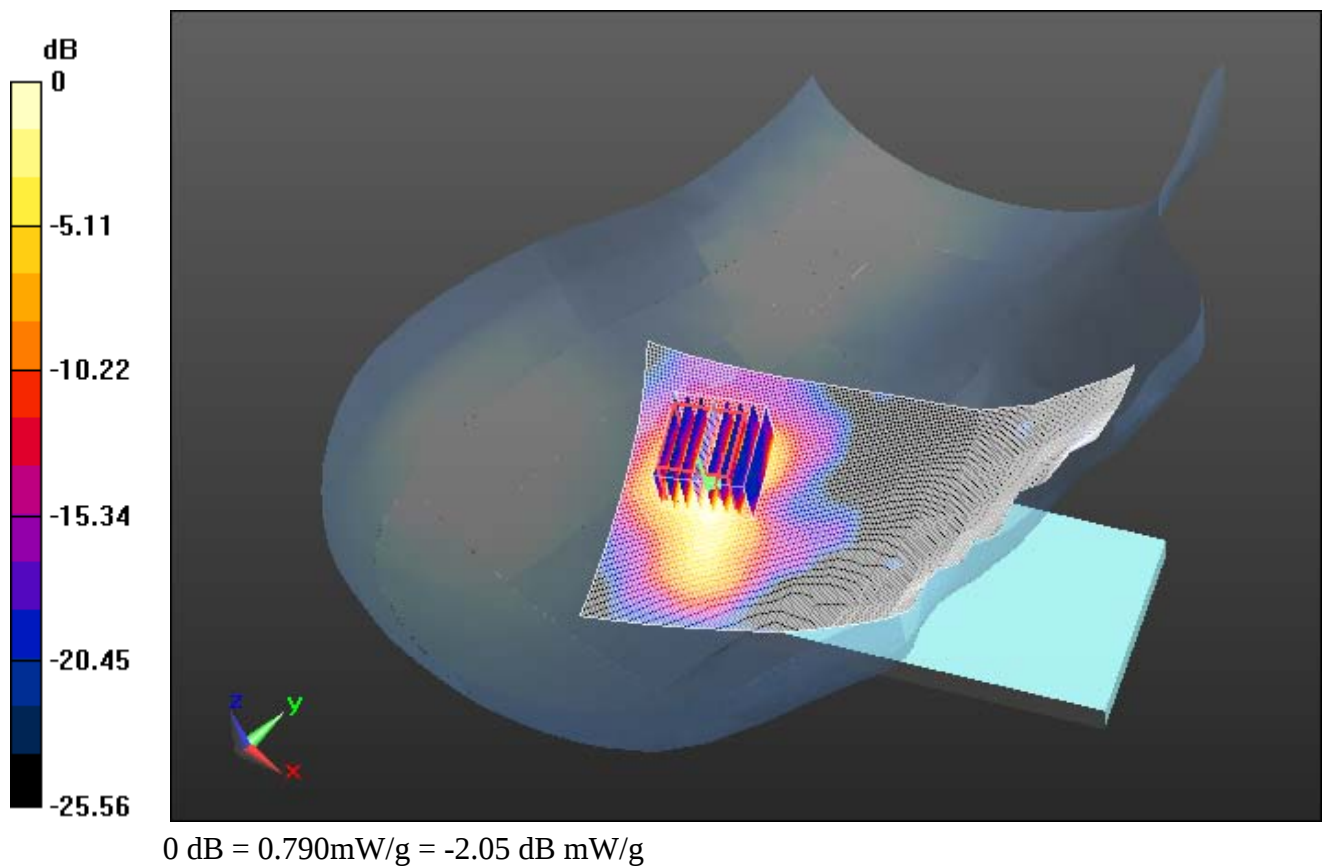

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 76(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/16/2012 7:39:52 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_802.11a_upper_band_II_chan_149_amb_temp_23.1
C_liq_temp_22.5C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5745 MHz

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.452 \text{ mho/m}$; $\epsilon_r = 34.333$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position 2 -/Area Scan (91x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.217 mW/g

Configuration/Tilt position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 15.449 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.0910

SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 1.089 mW/g

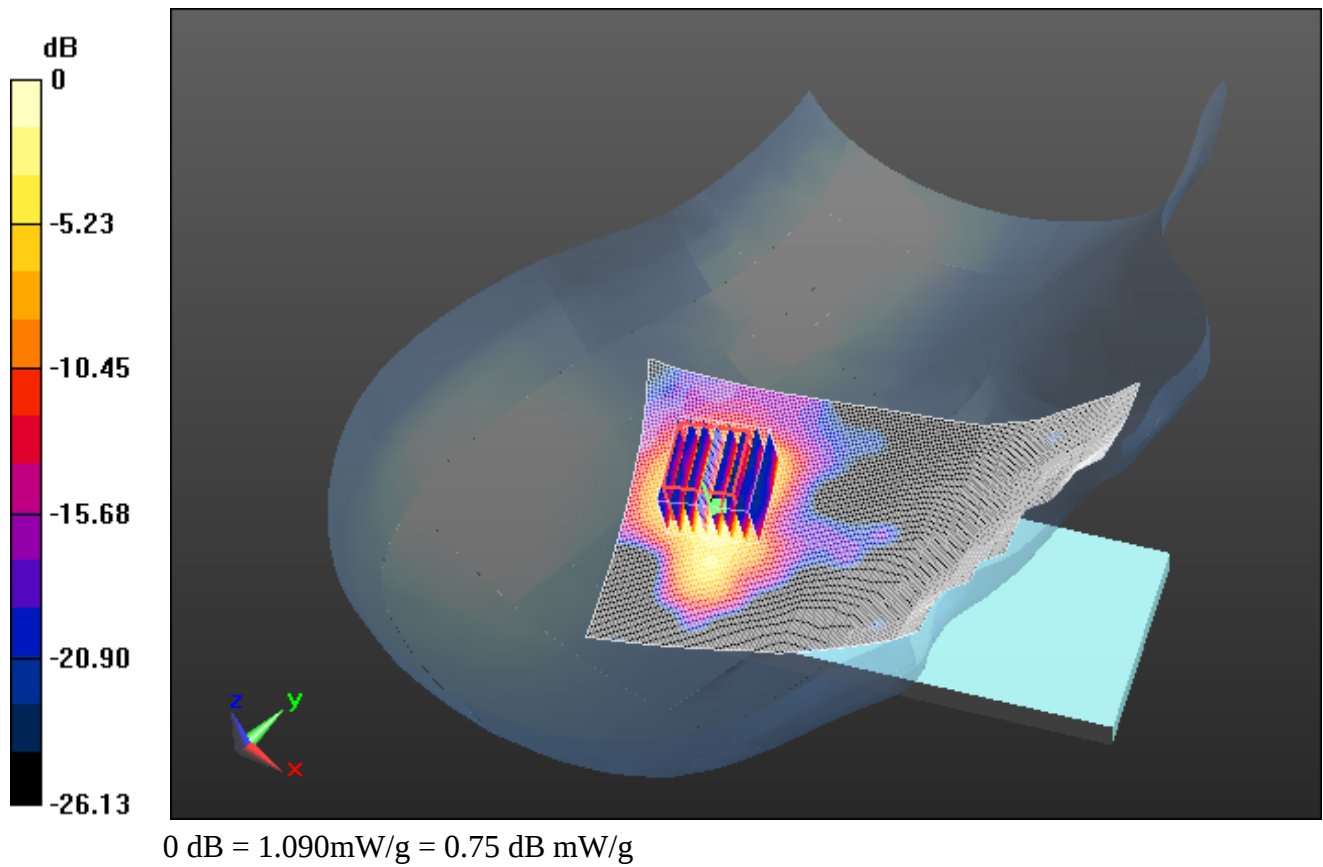

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 78(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 4:57:55 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11a_low_band_chan_36_amb_temp_23.2C_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5180 MHz

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.764 \text{ mho/m}$; $\epsilon_r = 34.626$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.89, 4.89, 4.89); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.159 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 15.609 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.0360

SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 1.000 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 79(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

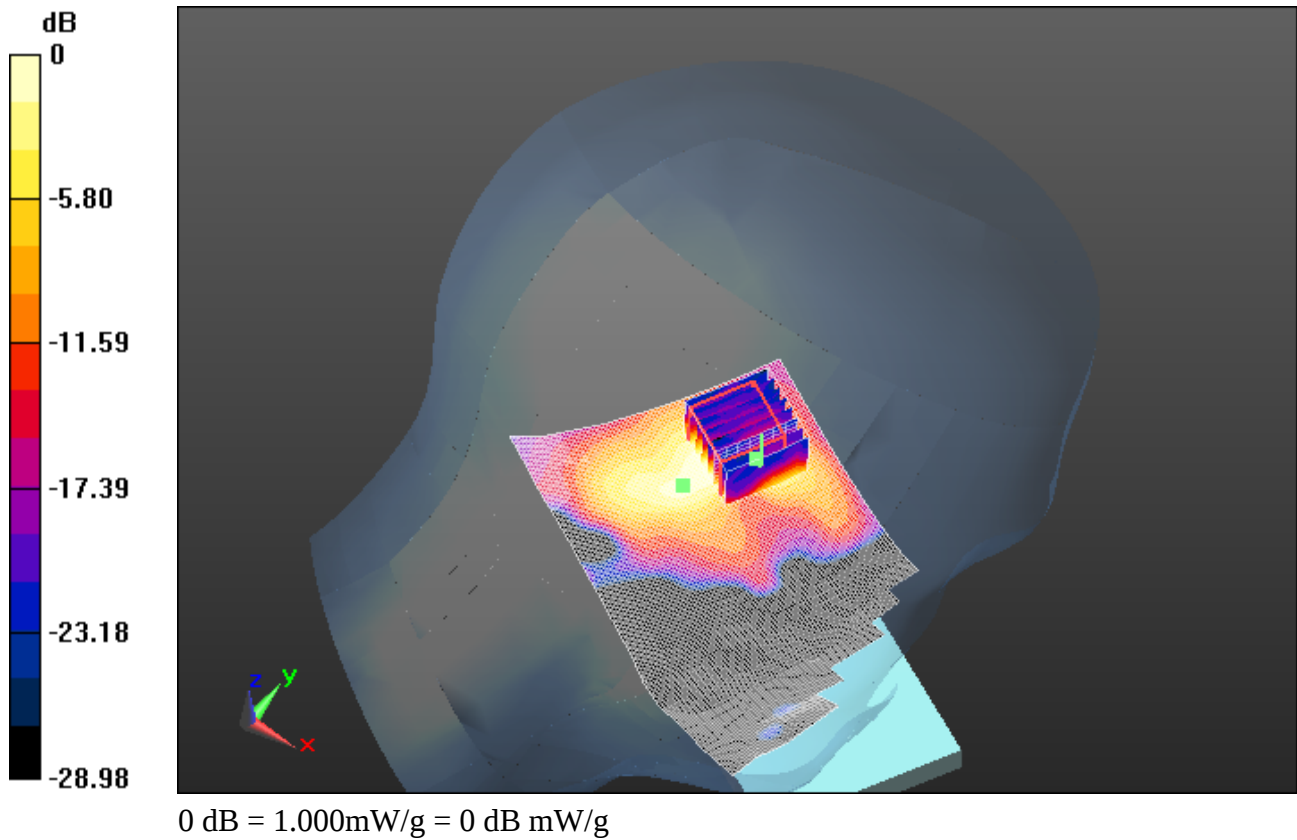

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 80(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 6:58:17 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11a_mid_band_chan_52_amb_temp_23.2C_liq_temp_21.5C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5260 MHz

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.851 \text{ mho/m}$; $\epsilon_r = 34.447$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.89, 4.89, 4.89); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.833 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (10x10x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 13.293 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.6220

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.836 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 81(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

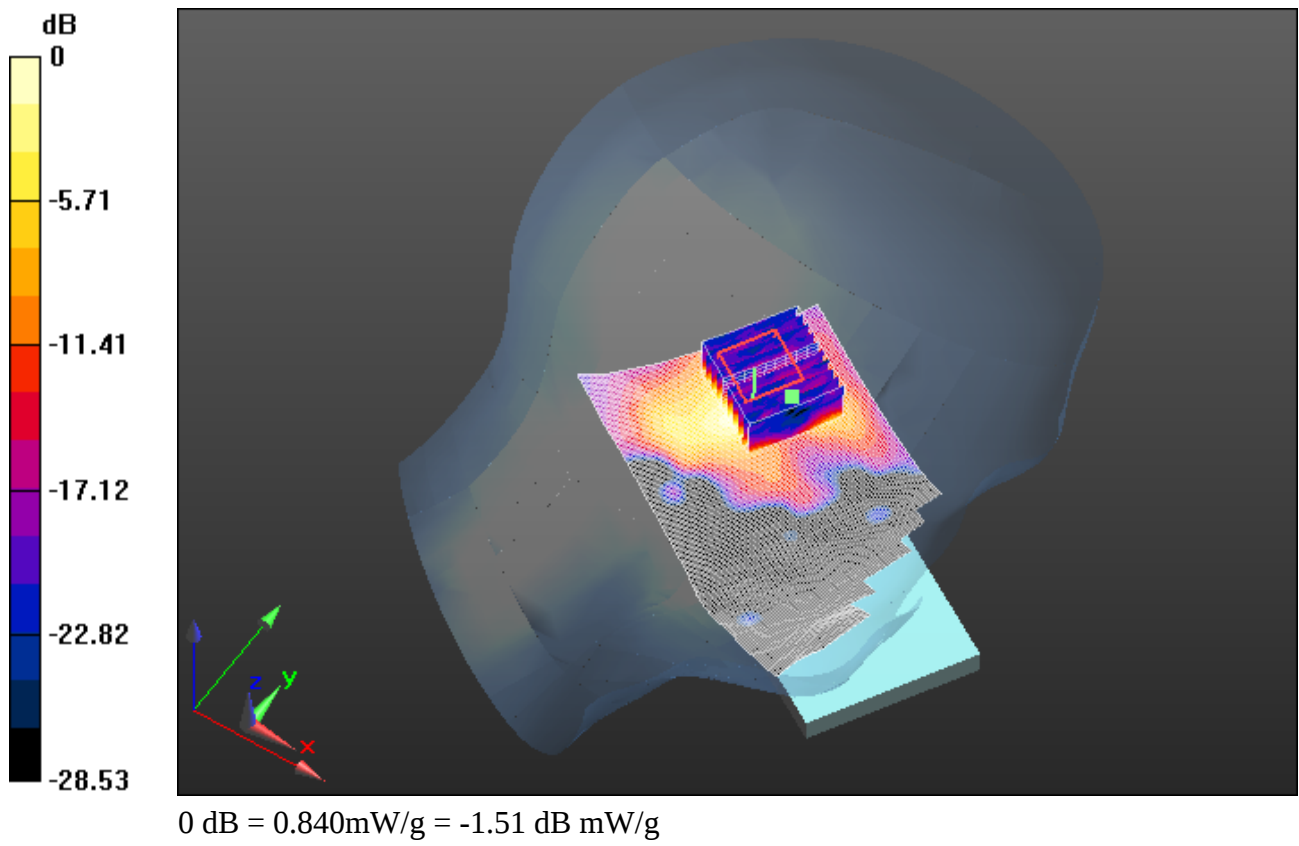

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report				Page 82(98)
	Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 9:10:58 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_802.11a_upper_band_l_chan_104_amb_temp_23.2C_liq_
temp_21.5C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5520 MHz

Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 5.085 \text{ mho/m}$; $\epsilon_r = 33.99$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.38, 4.38, 4.38); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.890 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (10x9x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 11.793 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.7340

SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.899 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 83(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

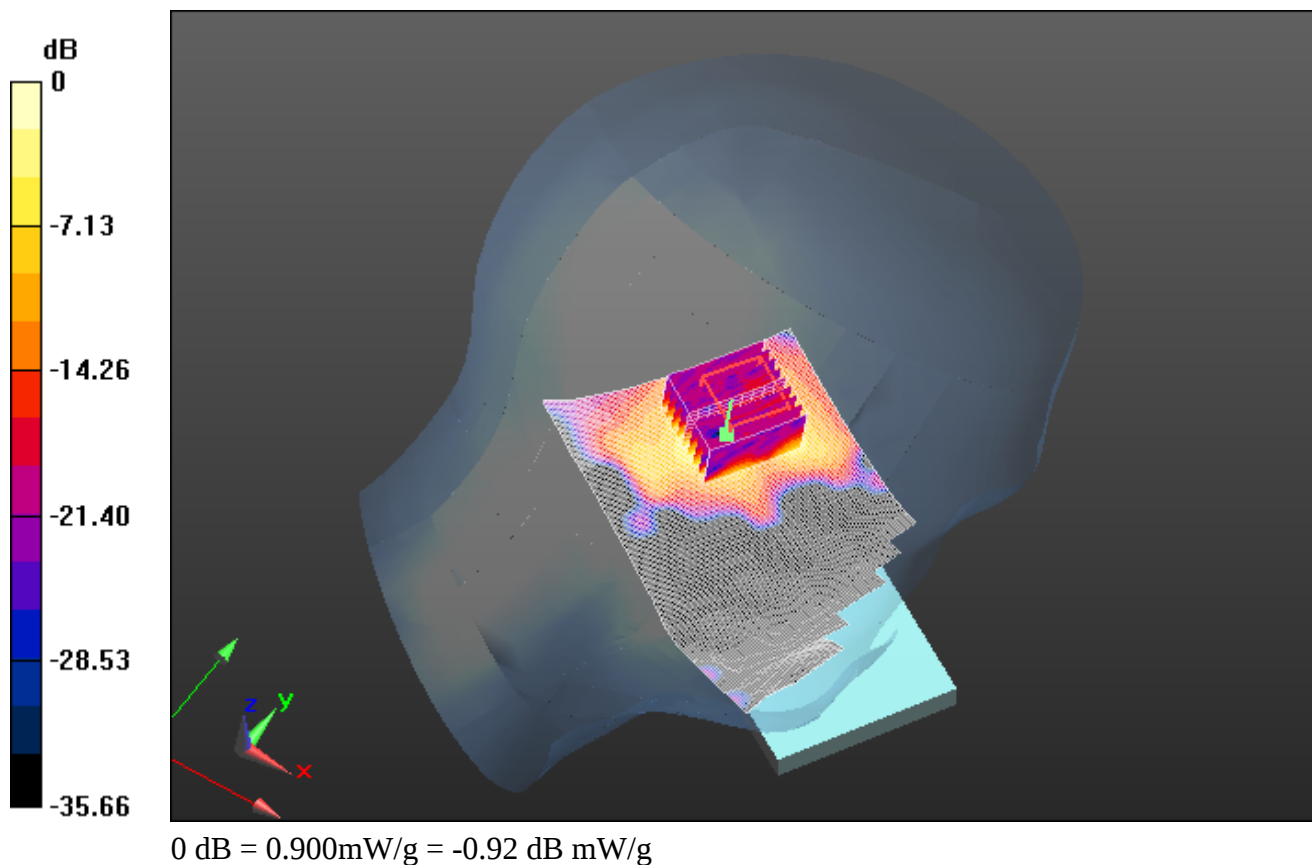

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 84(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 10:24:52 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_802.11a_upper_band_ll_chan_149_amb_temp_23.4C_liq
_temp_21.6C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5745 MHz

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.452 \text{ mho/m}$; $\epsilon_r = 34.333$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.477 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (9x9x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 12.542 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.9260

SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 1.497 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 85(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

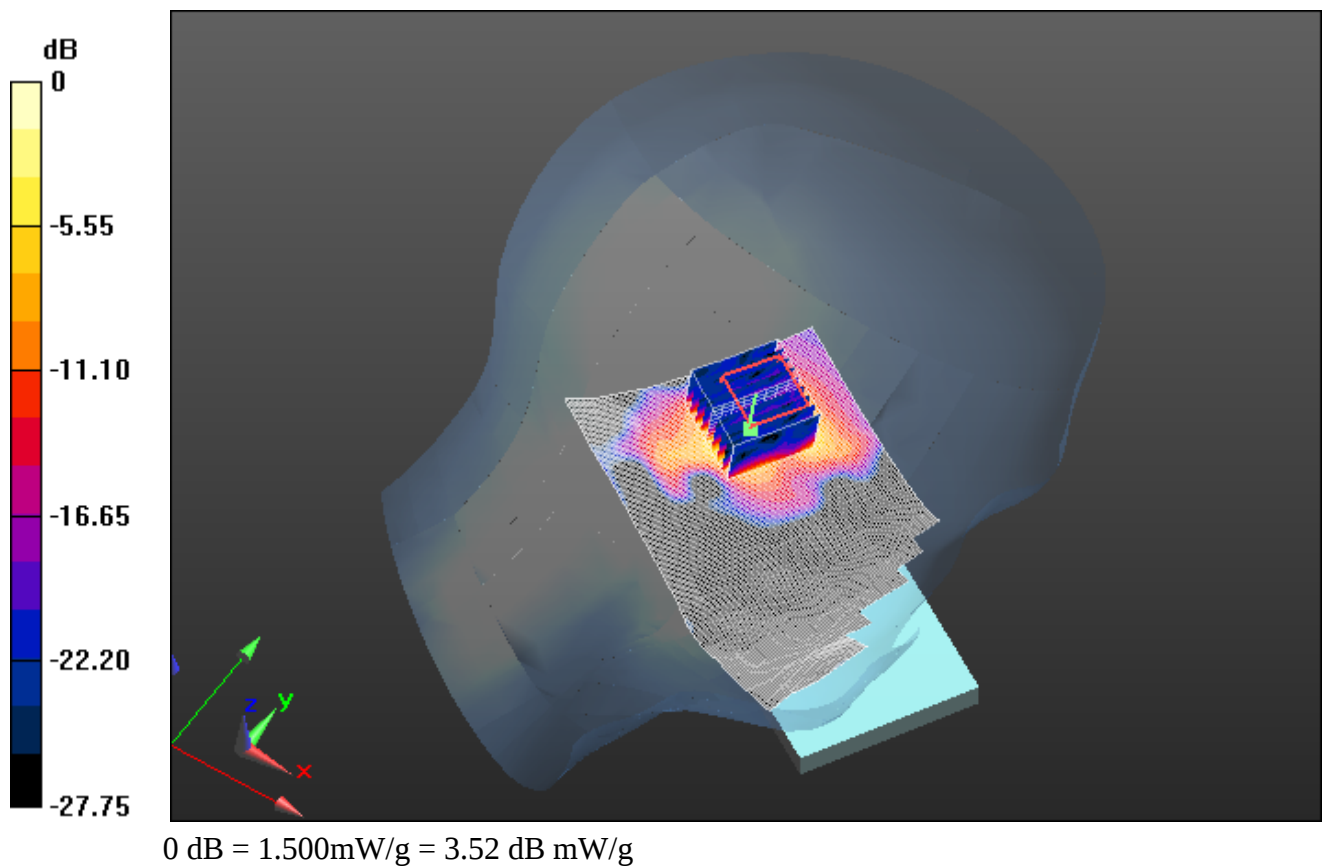

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 86(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 4:13:07 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_802.11a_low_band_chan_36_amb_temp_23.6C_liq_t
emp_22.5C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5180 MHz

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.764 \text{ mho/m}$; $\epsilon_r = 34.626$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.89, 4.89, 4.89); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.592 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (9x9x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 17.540 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.5650

SAR(1 g) = 0.717 mW/g; SAR(10 g) = 0.264 mW/g

Maximum value of SAR (measured) = 1.367 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 87(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

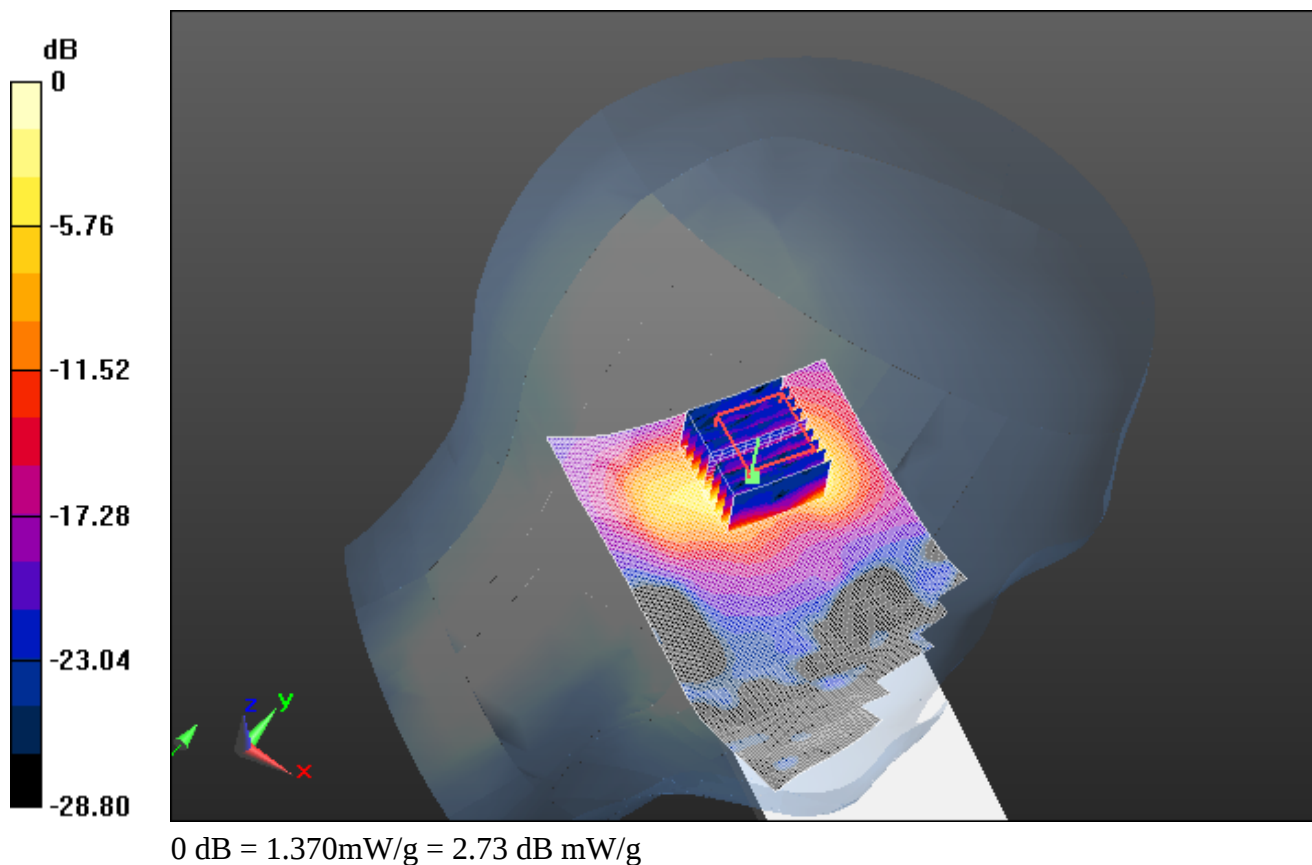

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 88(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 3:29:15 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_802.11a_mid_band_chan_52_amb_temp_23.6C_liq_t
emp_22.5C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5260 MHz

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.851 \text{ mho/m}$; $\epsilon_r = 34.447$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.89, 4.89, 4.89); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.100 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 13.262 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.0690

SAR(1 g) = 0.556 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 1.059 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 89(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

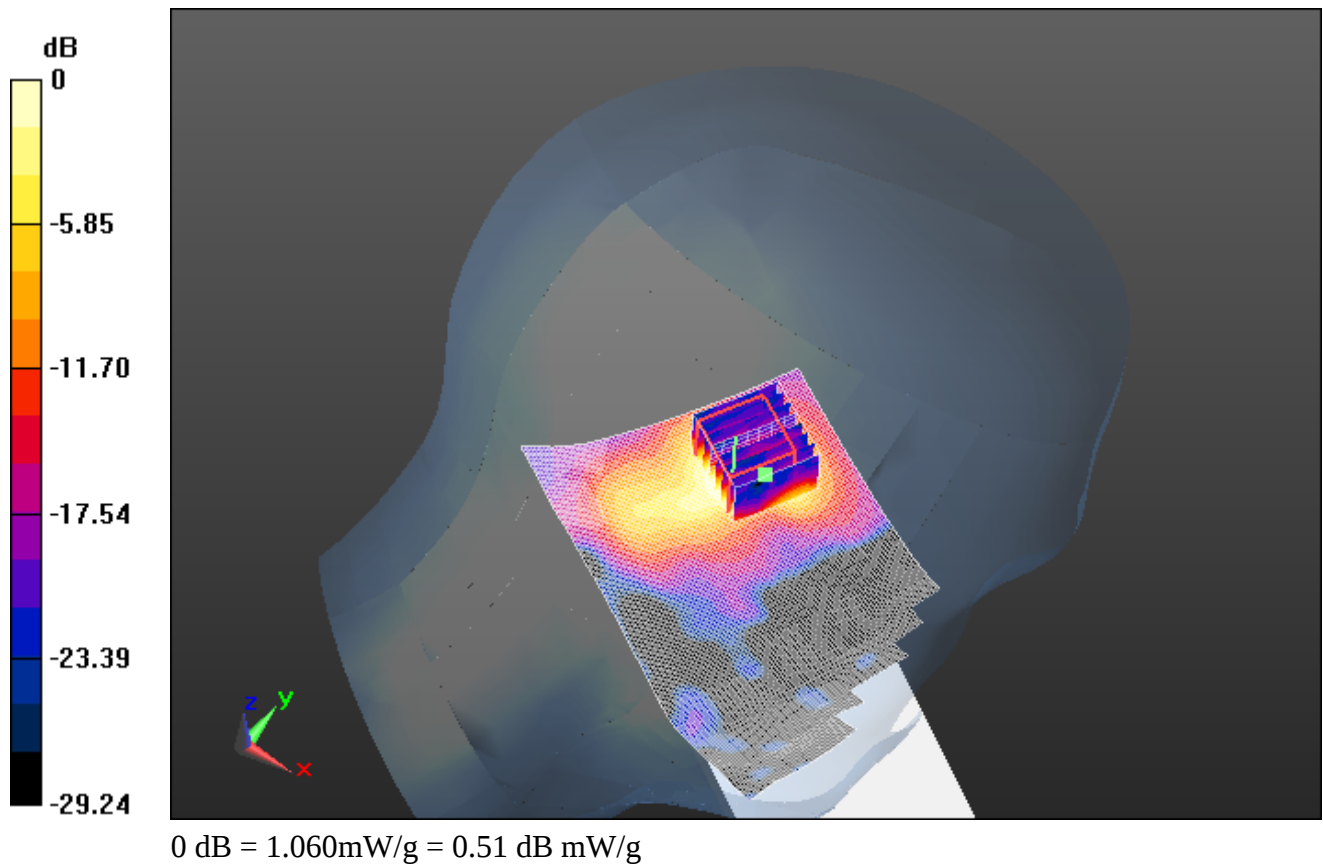

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 90(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 2:46:33 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_802.11a_upper_band_I_chan_104_amb_temp_23.6C
_liq_temp_22.5C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5520 MHz

Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 5.085 \text{ mho/m}$; $\epsilon_r = 33.99$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.38, 4.38, 4.38); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.225 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 11.068 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.3830

SAR(1 g) = 0.612 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 1.200 mW/g

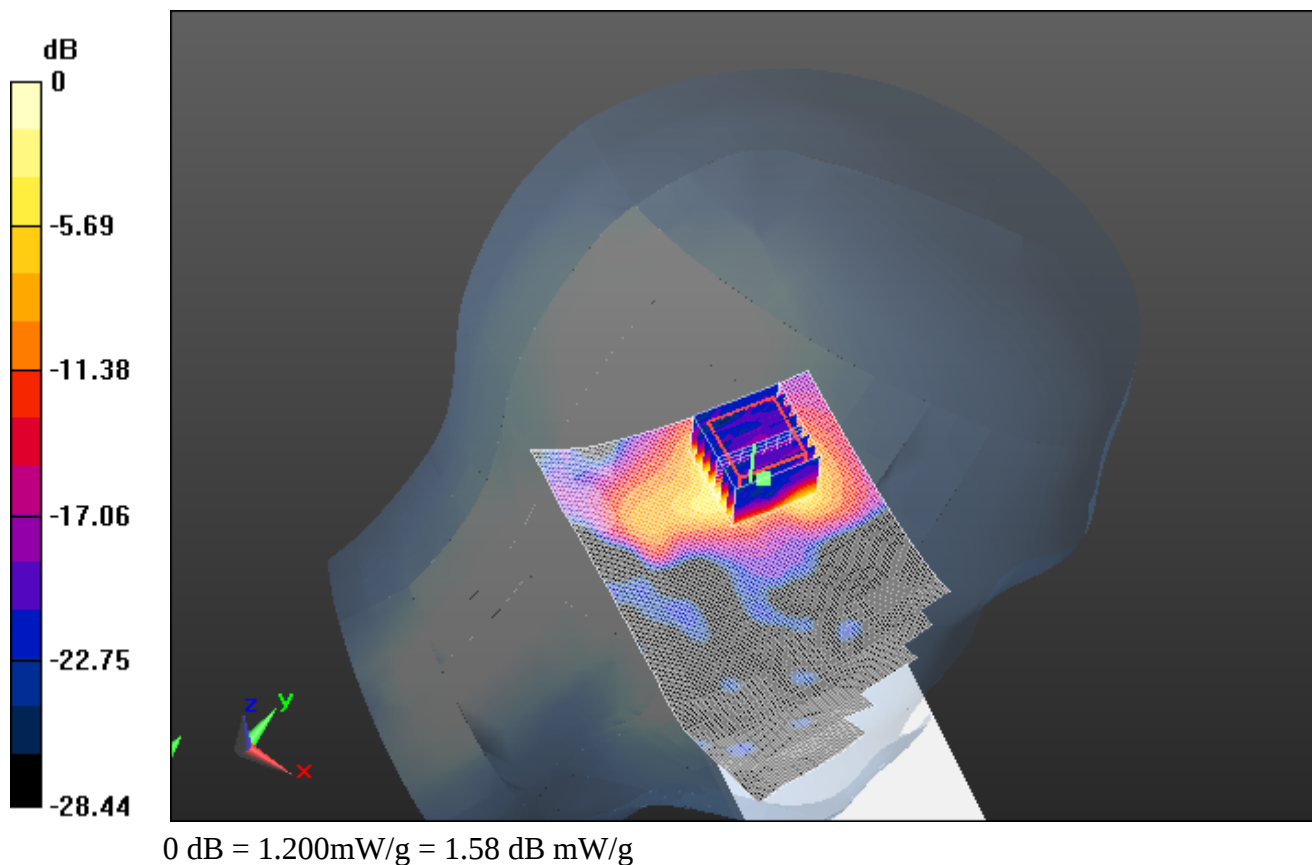

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 92(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 1:04:25 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11a_upper_band_II_chan_149_amb_temp_23.6
C_liq_temp_22.7C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5745 MHz

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.413 \text{ mho/m}$; $\epsilon_r = 34.391$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.551 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 10.193 V/m; Power Drift = -0.0087 dB

Peak SAR (extrapolated) = 3.1750

SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 1.587 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 93(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

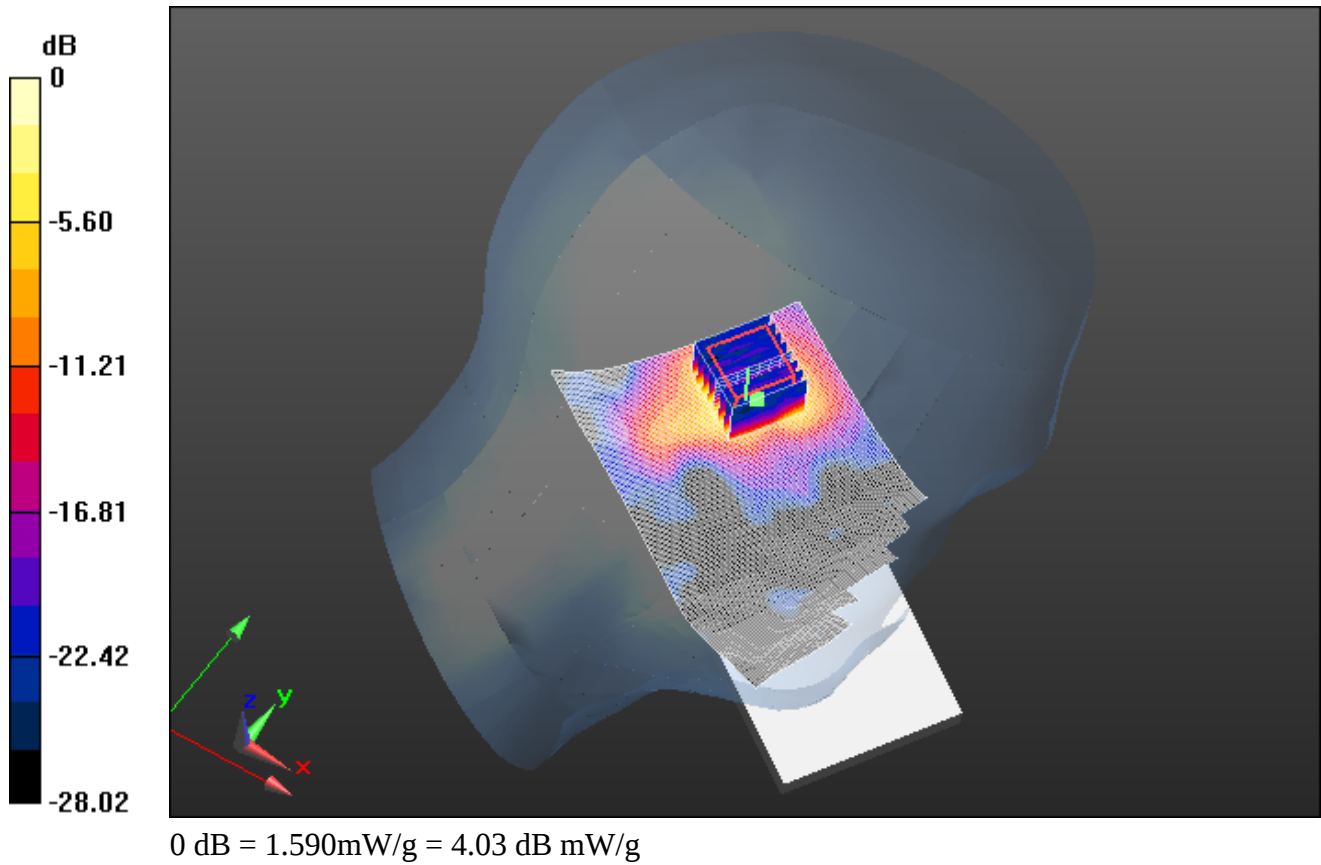

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 94(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 12:29:49 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11a_upper_band_II_chan_157_amb_temp_24.2
C_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5785 MHz

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.482 \text{ mho/m}$; $\epsilon_r = 34.158$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.735 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (9x9x9)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 10.630 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.7740

SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.305 mW/g

Maximum value of SAR (measured) = 1.881 mW/g

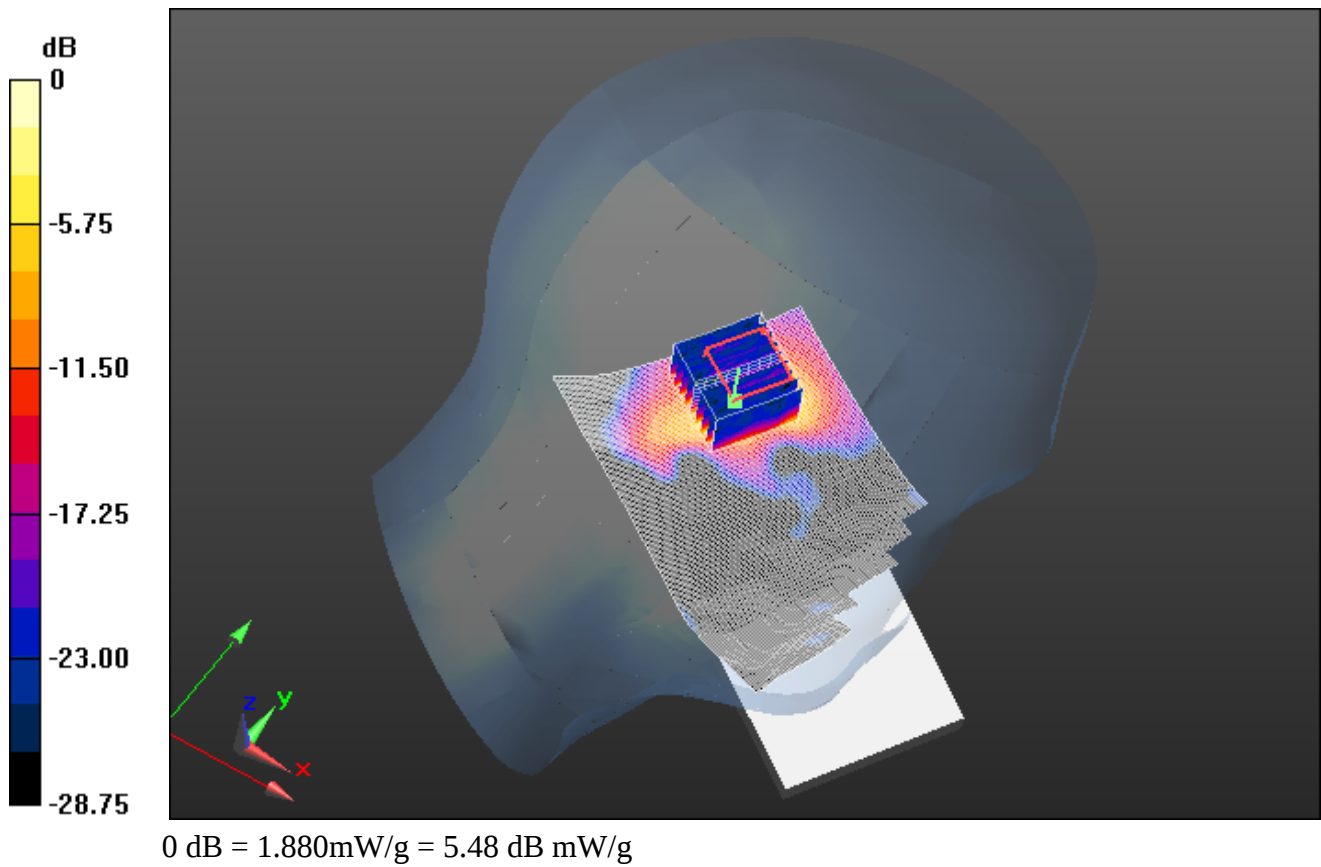

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 96(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Date/Time: 8/15/2012 2:01:07 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11a_upper_band_II_chan_165_amb_temp_23.6
C_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A4A5839

Communication System: 802.11a ; Frequency: 5825 MHz

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.539 \text{ mho/m}$; $\epsilon_r = 34.097$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.17, 4.17, 4.17); Calibrated: 11/16/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 21.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position 2 -/Area Scan (91x151x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.757 mW/g

Configuration/Touch position 2 -/Zoom Scan (7x7x9) (8x8x9)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 10.483 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.9710

SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 1.897 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 97(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

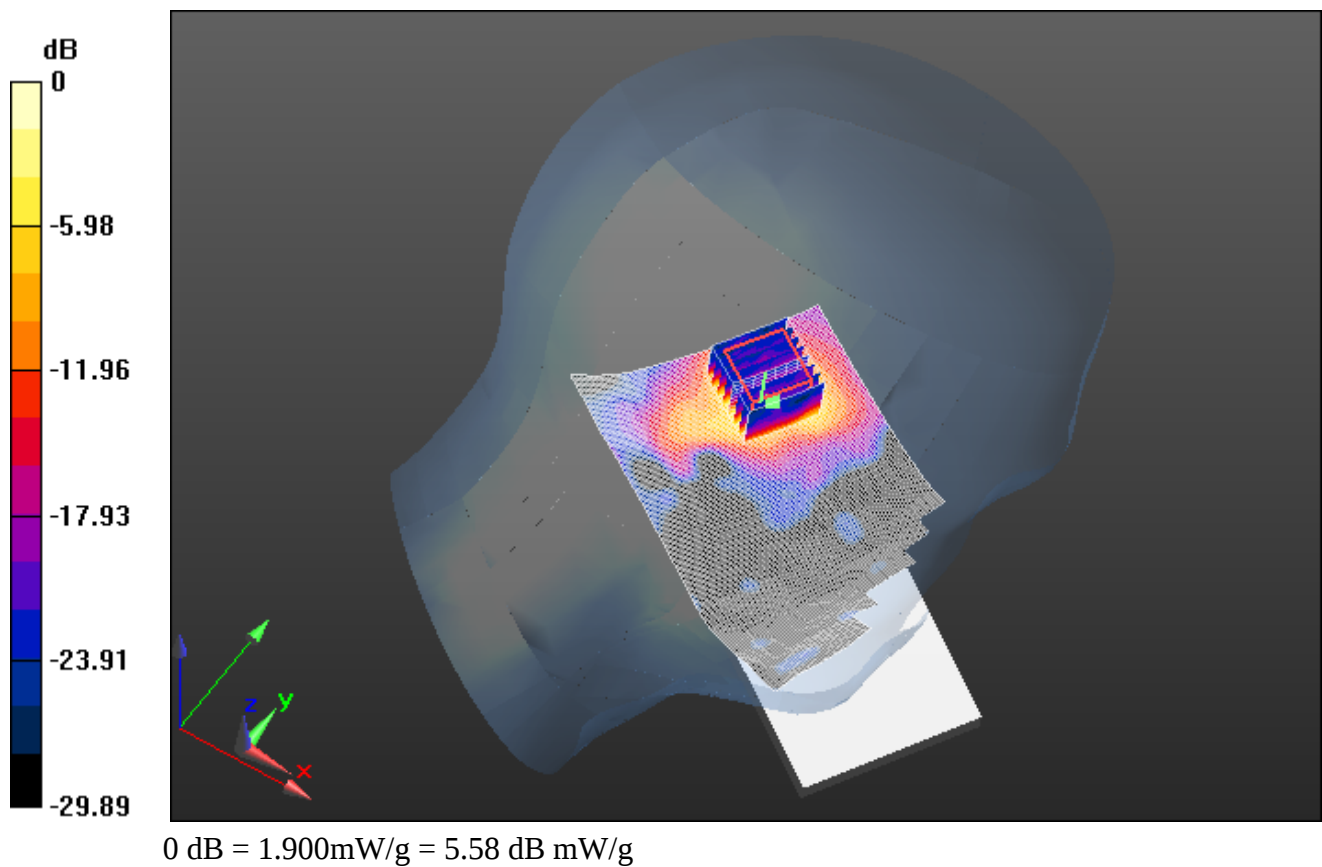

	Document Appendix B for the BlackBerry® Smartphone Model RFG81UW SAR Report			Page 98(98)
Author Data Andrew Becker	Dates of Test May 29 – August 16, 2012	Test Report No RTS-6011-1208-28	FCC ID: L6ARFG80UW	IC ID 2503A-RFG80UW

Z axis plot for the worst case head configuration

