

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Part 15 Subpart C and E
&
Industry Canada (IC) RSS-210, RSS-GEN



A division of Research In Motion Limited

REPORT NO.: RTS-6012-1211-33


PRODUCT MODEL NO.: RFH121LW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

DATE: December 07, 2012

RTS is accredited
according to
EN ISO/IEC 17025 by:



592

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Statement of Performance:

The BlackBerry® smartphone, model RFF91LW, part number CER-48927-001 Rev2, and its accessories perform within the requirements of the test standards when configured and operated under RIM's operation instructions.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:

Reviewed by:

Feras Obeid
Regulatory Compliance Associate

Heng Lin
Regulatory Compliance Specialist

Reviewed and Approved by:

Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance



	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Table of Contents

A.	Scope.....	4
B.	Associated Documents	4
C.	Product Identification.....	4
D.	Support Equipment Used for the Testing of the EUT	6
E.	Test Results Chart	7
F.	Summary of Results.....	9
G.	Compliance Test Equipment Used.....	18
APPENDIX 1 – AC CONDUCTED EMISSIONS TEST DATA/PLOTS.....		19
APPENDIX 2 – BLUETOOTH, BLUETOOTH LOW ENERGY AND 802.11b/g/n RADIATED EMISSIONS TEST DATA.....		27
APPENDIX 3 – 802.11a/n RADIATED EMISSIONS TEST DATA		44
APPENDIX 4 – BLUETOOTH AND BLUETOOTH LOW ENERGY CONDUCTED EMISSIONS TEST DATA/PLOTS.....		59
APPENDIX 5 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS		101
APPENDIX 6 – 802.11a/n CONDUCTED EMISSIONS TEST DATA/PLOTS		123
APPENDIX 7 – NEAR FIELD COMMUNICATIONS TEST DATA/PLOTS		168

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

A. Scope

This report details the results of compliance tests which were performed in accordance with the requirements of:

- o FCC CFR 47 Part 15, Subpart C, October, 2011
- o FCC CFR 47 Part 15, Subpart E, October, 2011
- o Industry Canada, RSS-210, Issue 8, December 2010, Licence-exempt Radio Apparatus
- o Industry Canada, RSS-GEN, Issue 3, December 2010, General Requirements and Information for the Certification of Radio Apparatus

B. Associated Documents

- 1) MultiSourceDeclaration_RFH121LW _b542
- 2) MultiSourceDeclaration_RFH121LW _b785
- 3) RFH121LW _HW_Declaration_CER-52836-001 _Rev2.

C. Product Identification


Manufactured by Research In Motion Limited whose headquarters is located at:

295 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services EMI test facilities	
305 Phillip Street	440 Phillip Street
Waterloo, Ontario	Waterloo, Ontario
Canada, N2L 3W8	Canada, N2L 5R9
Phone: 519 888 7465	Phone: 519 888 7465
Fax: 519 888 6906	Fax: 519 888 6906

The testing was performed from October 1 to November 26, 2012

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012		FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


The sample EUT included:

SAMPLE	MODEL	CER NUMBER	PIN	SOFTWARE
1	RFH121LW	CER-52836-001 Rev1	2A76E98C	OS Version: 10.0.9.341 Bundle 341
2	RFH121LW	CER-52836-001 Rev1	2A76E9A2	OS Version: 10.0.9.380 Bundle 380
3a	RFH121LW	CER-52836-001 Rev1	2A76E9A6	OS Version: 10.0.9.341 Bundle 341
3b	RFH121LW	CER-52836-001 Rev1	2A76E9A6	OS Version: 10.0.9.542 Bundle 542
4	RFH121LW	CER-52836-001 Rev2	25B217A5	OS Version: 10.0.9.785 Bundle 785
5	RFH121LW	CER-52836-001 Rev2	25B217A7	OS Version: 10.0.9.785 Bundle 785
6	RFH121LW	CER-52836-001 Rev2	25B2184C	OS Version: 10.0.9.785 Bundle 785

AC Line Conducted Emissions testing was performed on sample 6
Radiated Emissions testing was performed on samples.1,2, 5 and 6
Conducted Emissions testing was performed on sample 3a and 3b and 4
Near Field Communications testing was performed on sample 4

Only the characteristics that may have been affected by the changes from RFH121LW Rev1 to RFH121LW Rev2 were re-tested.
For more details, refer to RFH121LW _HW_Declaration_CER-52836-001 _Rev2.

To view the differences between software bundles 10.0.9.341 to 10.0.9.542 for RFH121LW, see document MultiSourceDeclaration_RFH121LW _b542, MultiSourceDeclaration_RFH121LW _b785,


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

BlackBerry® smartphone Accessories Tested

- 1) Fixed Blade Charger, part number HDW-47725-001, with an output voltage of 5.0 volts dc, 850 mA
- 2) Folding Blade Charger, part number HDW-34724-001, with an output voltage of 5.0 volts dc, 1.8 A.
- 3) World Wide Travel Charger, part number HDW 34725-001, with an output voltage of 5.0 volts, dc, 2A.
- 4) Alt. Fixed Blade Charger, part number HDW-47725-001, with an output voltage of 5.0 volts, dc, 850mA.
- 5) Wired Headset, part number HDW-44306-001, with a lead length of 1.1 metres.
- 6) Alt. Wired Headset, part number HDW-44306-001, with a lead length of 1.1 metres.
- 7) Alt.2 Wired Headset, part number HDW-44306-003, with a lead length of 1.1 metres.
- 8) USB Data Cable, part number HDW-28109-003, 1.20 metres long.


D. Support Equipment Used for the Testing of the EUT

- 1) Philips Monitor, type MWE12244T, product ID 2444E1SB/27

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	


E. Test Results Chart

SPECIFICATION		TEST TYPE	Meets Requirements	TEST DATA
FCC CFR 47	IC			APPENDIX
Part 15.207	RSS-210 RSS-GEN	Conducted AC Line Emission	Pass	1
Part 15.209 Part 15.247	RSS-210 RSS-GEN	BT/BLE Radiated Spurious Emissions	Pass	2
Part 15.209 Part 15.247	RSS-210 RSS-GEN	BT/BLE Radiated Band Edge Compliance	Pass	2
Part 15.209 Part 15.247	RSS-210 RSS-GEN	802.11b/g/n Radiated Spurious Emissions	Pass	2
Part 15.209 Part 15.247	RSS-210 RSS-GEN	802.11b/g/n Radiated Band Edge Compliance	Pass	2
Part 15.209 Part 15.407	RSS-210 RSS-GEN	802.11a/n Radiated Spurious Emissions	Pass	3
Part 15.209 Part 15.407	RSS-210 RSS-GEN	802.11a/n Radiated Band Edge Compliance	Pass	3
Part 15.247(a)	RSS-210	BT, 20 dB Bandwidth	Pass	4
Part 15.247(a)	RSS-210	BT, Carrier Frequency Separation	Pass	4
Part 15.247(a)	RSS-210	BT, Number of Hopping Frequencies	Pass	4
Part 15.247(a)	RSS-210	BT, Time of Occupancy (Dwell Time)	Pass	4
Part 15.247(b)	RSS-210	BT, Maximum Peak Conducted Output Power	Pass	4
Part 15.247(c)	RSS-210	BT, Band-Edge Compliance of RF Conducted Emissions	Pass	4
Part 15.247(c)	RSS-210	BT, Spurious RF Conducted Emissions	Pass	4
Part 15.247(a)	RSS-210	BLE, 6 dB Bandwidth	Pass	4
Part 15.247(b)	RSS-210	BLE, Maximum Conducted Output Power	Pass	4
Part 15.247(c)	RSS-210	BLE, Band-Edge	Pass	4
Part 15.247(d)	RSS-210	BLE, Peak Power Spectral Density	Pass	4
Part 15.247(c)	RSS-210	BLE, Spurious RF Conducted Emissions	Pass	4

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

Test Results Chart cont'd

SPECIFICATION		TEST TYPE	Meets Requirements	TEST DATA
FCC CFR 47	IC			APPENDIX
Part 15.247(a)	RSS-210	802.11b/g/n, 6 dB Bandwidth	Pass	5
Part 15.247(b)	RSS-210	802.11b/g/n, Maximum Conducted Output Power	Pass	5
Part 15.247(c)	RSS-210	802.11b/g/n, Band-Edge	Pass	5
Part 15.247(d)	RSS-210	802.11b/g/n, Peak Power Spectral Density	Pass	5
Part 15.247(c)	RSS-210	802.11b/g/n, Spurious RF Conducted Emissions	Pass	5
Part 15.407	RSS-210	802.11a/n, 6 dB Bandwidth	Pass	6
Part 15.407	RSS-210	802.11a/n, Maximum Conducted Output Power	Pass	6
Part 15.407	RSS-210	802.11a/n, Band-Edge	Pass	6
Part 15.407	RSS-210	802.11a/n, Peak Power Spectral Density	Pass	6
Part 15.407	RSS-210	802.11a/n, Spurious RF Conducted Emissions	Pass	6
Part 15.209 Part 15.225(a)	RSS-210 RSS-GEN	Near Field Communications, Radiated Emissions	Pass	7
Part 15.225(e)	RSS-210	Near Field Communications, Occupied Bandwidth	Pass	7
Part 15.225(e)	RSS-210	Near Field Communications, Frequency Stability	Pass	7

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

F. Summary of Results

1) AC LINE CONDUCTED EMISSIONS


The conducted emissions were measured using the test procedure outlined in CISPR Recommendation 22 through a 50 Ohm Line Impedance Stabilization Network (LISN), which was inserted in the power line to the equipment to provide the specified impedance for measurements. The EUT was placed on a nonconductive wooden table, 80 cm high that was positioned 40 cm from a vertical ground plane. The RF output of the network was connected to an EMI receiver system with characteristics that duplicate those of the receiver specified in CISPR Publication 16. BlackBerry® smartphone was in battery charging mode. The input voltage was 120 V, 60 Hz.

The following test configurations were measured:

Test Configuration	Operating Mode(s)	Charger + Accessories
1	Bluetooth Tx + Audio Playing	Fixed Blade Charger + Alt.2 Wired Headset + USB Cable 1.20m
2	802.11b Tx + Video Playing	Folding Blade Charger + Wired Headset
3	NFC Tx	World Wide Travel Charger + Alt. Wired Headset

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15, Subpart C and IC RSS-210 limits. The sample EUT had a worst case test margin of 9.89 dB below the QP limit at 0.506 MHz and 5.38 dB below the AV limit at 0.506 MHz with the Folding Blade Charger in Test Configuration 2 See APPENDIX 1 for the test data.

Measurement Uncertainty ± 3.2 dB

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

2) BLUETOOTH, BLUETOOTH LOW ENERGY AND 802.11b/g/n RADIATED EMISSIONS

a) Radiated Spurious and Harmonic Emissions

The EUT was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 25.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a semi-anechoic chamber (SAC) with floor absorbers above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The SAC with floor absorber's FCC registration number is **959115** and the IC file number is **2503C-1**.

The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.


The BlackBerry® smartphone was measured in standalone configuration with Bluetooth transmitting in single frequency mode at low channel (0), middle channel (39) and high channel (78) for packet type "DH5", "2-DH5" and "3-DH5". The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart C, 15.247 and RSS-210.

The BlackBerry® smartphone was measured in standalone configuration with Bluetooth Low Energy transmitting in single frequency mode at low channel (0), middle channel (20) and high channel (39). The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart C, 15.247 and RSS-210.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 1, 6 & 11 at 1 Mbps for 802.11b mode, at 6 Mbps for 802.11g mode, and at MCS 0 for 802.11n mode. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart C, 15.247 and RSS-210.

The Bluetooth harmonics were investigated up to the 10th Harmonic. Sample EUT emissions were in the noise floor


The Bluetooth Low Energy Harmonics were investigated up to the 10th Harmonic. Sample EUT emissions were in the noise floor.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

The 802.11b/g/n harmonics were investigated up to the 10th harmonic. The sample EUT emissions were in the noise floor (NF).
See APPENDIX 2 for the test data.

- b) **Band-Edge Compliance of RF Radiated Emissions**
The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for Bluetooth, Bluetooth Low Energy and 802.11b/g/n as per the requirements of 15.247, 15.209, and RSS-210/RSS-GEN.

Measurement Uncertainty ±4.5 dB
See APPENDIX 2 for the test data

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

3) 802.11a/n RADIATED EMISSIONS

a) Radiated Spurious and Harmonic Emissions

The EUT was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 40.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a semi-anechoic chamber (SAC) with floor absorbers above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The SAC with floor absorber's FCC registration number is **959115** and the IC file number is **2503C-1**.

The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 36, 48, 64, 100, 140 and 165 at 6 Mbps for 802.11a mode and at MCS 0 for 802.11n. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart E, 15.407 and RSS-210/RSS-GEN.

The 802.11a/n harmonics were investigated up to the 10th harmonic. The sample EUT emissions were in the noise floor (NF).


See APPENDIX 3 for the test data.

b) Band-Edge Compliance of RF Radiated Emissions

The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for 802.11a/n as per the requirements of 15.407, 15.209 and RSS-210/ RSS-GEN.

See APPENDIX 3 for the test data

Measurement Uncertainty ±4.5 dB

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

4) i) BLUETOOTH RF CONDUCTED EMISSIONS

The Bluetooth conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 20 dB Bandwidth

The BlackBerry® smartphone met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR. The worst case 20 dB Bandwidth was 0.918MHz for channel 0 in normal data rate mode and 1.318MHz for channel 78 in EDR mode.

See APPENDIX 4 for the test data.

b) Carrier Frequency Separation

The BlackBerry® smartphone met the requirements of the carrier frequency separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. The result includes both normal data rate and EDR.

See APPENDIX 4 for the test data.

c) Number of Hopping Frequencies

The BlackBerry® smartphone met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. The number of hopping channels measured was 79.

See APPENDIX 4 for the test data.

d) Time of Occupancy (Dwell Time)


The EUT met the requirements of the dwell time as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in DH1, DH3 and DH5 modes. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements.

See APPENDIX 4 for the test data.

e) Maximum Peak Conducted Output Power

The BlackBerry® smartphone met the requirements of the maximum peak conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR. The worst case Conducted Output Power level was 7.69 dBm (0.00587 W) for Channel 39 in normal data rate mode and 7.71 dBm (0.00590 W) for channel 39 in EDR mode.

See APPENDIX 4 for the test data.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

f) Band-Edge Compliance of RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the band-edge compliance of RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 0 and 78 were measured in frequency hopping (Euro/US) mode and single frequency mode. The result includes both normal data rate and EDR. See APPENDIX 4 for the test data.

g) Spurious RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 10 MHz to 26 GHz. Low channel (0), middle channel (39) and high channel (78) were measured in single frequency mode and frequency hopping (Euro/US) mode. The result includes both normal data rate and EDR. See APPENDIX 4 for the test data.

4) ii) BLUETOOTH LOW ENERGY RF CONDUCTED EMISSIONS

The Bluetooth Low Energy conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 6dB Bandwidth


The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (20) and high channel (39) were measured. The worst case 6 dB Bandwidth was 0.687 MHz for channel 39. See APPENDIX 4 for the test data.

b) Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (20) and high channel (39) were measured. The worst case Conducted Output Power level was 6.00 dBm (0.00398 W) for channel 20. See APPENDIX 4 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.247(b) and RSS-210. Low channel (0) and high channel (39) were measured. See APPENDIX 4 for the test data.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (20) and high channel (39) were measured.

See APPENDIX 4 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 30 MHz to 26 GHz. Low channel (0), middle channel (20) and high channel (39) were measured.

See APPENDIX 4 for the test data.

5) 802.11b/g/n RF CONDUCTED EMISSIONS

The 802.11b/g/n conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 6dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. The worst case 6 dB Bandwidth was 10.36 MHz for channel 1 in 802.11b mode, 16.53 MHz for channels 1 in 802.11g mode, and 17.77 MHz for channel 1 in 802.11n mode.

See APPENDIX 5 for the test data.

b) Maximum Conducted Output Power


The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. The worst case Conducted Output Power level was 17.16 dBm (0.052W) for channel 1 in 802.11b mode, 16.57 dBm (0.039W) for channel 1 in 802.11g mode, and 16.46 dBm (0.044W) for channel 1 in 802.11n mode.

See APPENDIX 5 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.247(b) and RSS-210. Low channel (1) and high channel (11) were measured.

See APPENDIX 5 for the test data.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured.

See APPENDIX 5 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 30 MHz to 26 GHz. Low channel (1), middle channel (6) and high channel (11) were measured.

See APPENDIX 5 for the test data.

6) 802.11a/n RF CONDUCTED EMISSIONS

The 802.11a/n conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart E.

a) 6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157, 161 and 165 were measured. The worst case 6 dB Bandwidth was 16.54 MHz for channel 52 in 802.11a mode. The worst case 6 dB Bandwidth was 17.76 MHz for channel 48 in 802.11n mode.

See APPENDIX 6 for the test data.

b) Maximum Conducted Output Power


The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157, 161 and 165 were measured. The worst case Conducted Output Power level was 15.33 dBm (0.034W) for channel 100 in 802.11a mode. The worst case Conducted Output Power level was 13.76 dBm (0.024W) for channel 64 in 802.11n mode.

See APPENDIX 6 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.407 and RSS-210. Channels 36, 48, 52, 64, 100, 149, 161 and 165 were measured.

See APPENDIX 6 for the test data.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 149, 157, 161 and 165 were measured.

See APPENDIX 6 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.407 and RSS-210. The frequency range measured was 30 MHz to 40 GHz. Channels 44, 60 and 157 were measured.

See APPENDIX 6 for the test data.

7) Near Field Communications (NFC)

The Near Field Communications emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) Radiated Emissions

The BlackBerry® smartphone was measured in standalone configuration transmitting at 13.56 MHz. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart C, 15.209, 15.225(a) and RSS-210/RSS-GEN.

The NFC emissions were investigated from 9 kHz to 1 GHz. The sample EUT has a field strength measurement of 52.98 dBuV/m.

See APPENDIX 7 for the test data.

b) Occupied Bandwidth


The EUT met the requirements of the Occupied bandwidth as per 47 CFR 15 C and RSS-210. The EUT was measured in test mode with modulation on and transmitting at 13.56 MHz.

See APPENDIX 7 for the test data.

c) Frequency Stability


The EUT met the requirements of the Frequency Stability as per 47 CFR 15.225(e) and RSS-210. The EUT was measured in test mode with modulation on and transmitting at 13.56 MHz.

See APPENDIX 7 for the test data.


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

G. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
EMI Test Receiver	Rohde & Schwarz	ESIB 40	100255	12-12-08	Conducted/Radiated Emissions
EMI Test Receiver	Rohde & Schwarz	ESU 40	100162	12-12-07	Conducted/Radiated Emissions
Hybrid Log Antenna	EMC Automation	HLP-3003C	017301	13-08-23	Radiated Emissions
Horn Antenna	CMT	3116	R52734-001	14-08-02	Radiated Emissions
Horn Antenna	ETS-Lindgren	3117	2538	13-08-04	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA4-SP	001	13-09-01	Radiated Emissions
Preamplifier	Sonoma	310N/11909A	185831	13-10-10	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA-SP	001	13-09-01	Radiated Emissions
L.I.S.N.	Rohde & Schwarz	ENV216	100060	13-10-25	Conducted Emissions
Environment Monitor	Omega	iTHX-SD	0380561	13-10-30	Radiated Emissions
EMC Analyzer	Agilent	E7405A	US40240226	13-01-03	Radiated Emissions
Spectrum Analyzer	HP	8563E	3745A08113	13-10-05	RF Conducted Emissions
DC Power Supply	HP	6632B	US37472178	13-09-25	RF Conducted Emissions
Environment Monitor	Omega	iTHX-SD	0340060	13-10-30	RF Conducted Emissions
Environmental Chamber	Test Equity	107	0900246	N/R	Frequency Stability
Bluetooth Tester	Rohde & Schwarz	CBT	119549	12-12-01	RF Conducted Emissions
Bluetooth Tester	Rohde & Schwarz	CBT35	100368	12-11-30	Radiated Emissions
Bluetooth Tester	Rohde & Schwarz	CBT35	100370	12-11-30	Radiated Emissions
Power Meter	Agilent	N1911A	MY45100951	13-08-16	RF Conducted / Frequency Stability
Power Sensor	Agilent	N1921A	MY45241383	13-09-11	RF Conducted / Frequency Stability
Digital Multimeter	Hewlett Packard	34401A	US36042324	13-11-13	Conducted/Radiated Emissions
Environment Monitor	Omega	iTHX-SD	0380567	13-10-30	Radiated Emissions

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

APPENDIX 1 – AC CONDUCTED EMISSIONS TEST DATA/PLOTS

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

AC Conducted Emission Test Results

The following tests were performed by Forhad Hasnat

Test Configuration 1

The BlackBerry® smartphone was tested on November 11, 2012

The environmental test conditions were: Temperature: 24.5 °C
Relative Humidity: 41.3 %

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dBµV)	Limit (AV) (dBµV)	Margin (QP) Limits (dB)
0.150	L1	34.76	11.20	45.97	66.00	56.00	-20.03
0.258	L1	26.82	10.45	37.27	61.50	51.50	-24.23
0.812	L1	21.55	9.82	31.37	56.00	46.00	-24.63
1.037	L1	21.21	9.80	31.01	56.00	46.00	-24.99
1.158	L1	26.30	9.80	36.10	56.00	46.00	-19.90

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector.

See figure 1-1 and figure 1-2 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

AC Conducted Emissions Test Graphs

Test Configuration 1

Figure 1-1: L1 lines


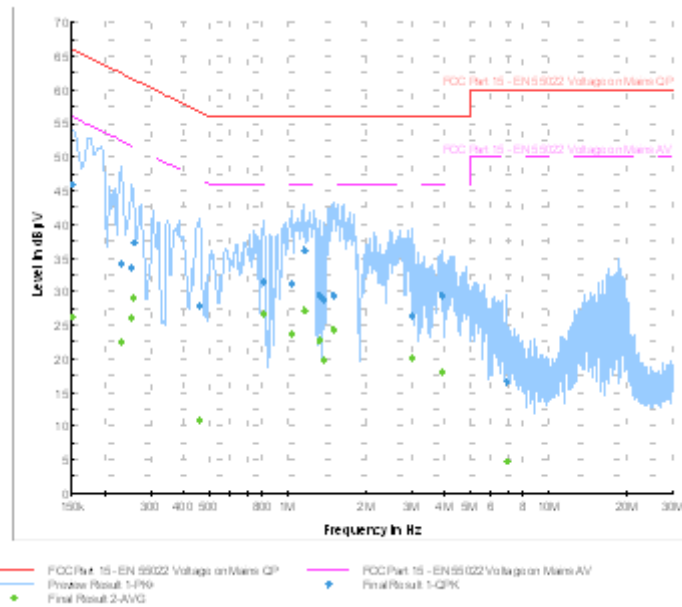



Figure 1-2: N Lines

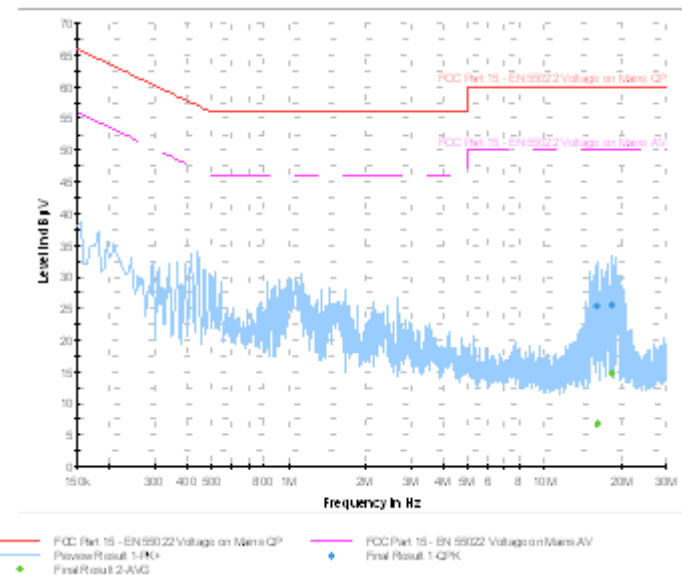

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 1	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


AC Conducted Emission Test Results cont'd

Test Configuration 2

The BlackBerry® smartphone was tested on November 09, 2012.

The environmental test conditions were: Temperature: 25 °C
Relative Humidity: 36 %

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dBµV)	Margin (QP) Limits (dB)
0.155	N	42.69	11.20	53.89	65.80	-11.91
0.195	L1	29.51	10.89	40.40	63.80	-23.40
0.204	N	39.34	10.85	50.19	63.40	-13.21
0.254	N	35.25	10.50	45.75	61.60	-15.85
0.258	N	32.53	10.47	43.01	61.50	-18.49
0.303	N	32.11	10.17	42.28	60.20	-17.92
0.348	N	28.55	10.10	38.65	59.00	-20.35
0.506	N	36.20	9.91	46.12	56.00	-9.89
0.537	L1	21.52	9.89	31.41	56.00	-24.59
0.686	N	27.88	9.84	37.72	56.00	-18.28
0.708	L1	22.89	9.83	32.73	56.00	-23.27
1.226	N	27.19	9.80	36.99	56.00	-19.01
1.311	N	29.78	9.80	39.58	56.00	-16.42
1.707	N	26.98	9.82	36.80	56.00	-19.20
2.742	N	27.35	9.87	37.22	56.00	-18.78
3.755	N	24.14	9.90	34.04	56.00	-21.96


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

AC Conducted Emissions Test Results cont'd

Test Configuration 2 cont'd

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (AV) (dBµV)	Margin (AV) Limits (dB)
0.155	N	32.68	11.20	43.88	45.80	-11.92
0.195	L1	21.80	10.89	32.69	43.80	-21.11
0.204	N	30.36	10.85	41.21	43.40	-12.19
0.254	N	26.75	10.50	37.26	41.60	-14.34
0.258	N	23.85	10.47	34.32	41.50	-17.18
0.294	L1	21.11	10.20	31.31	40.40	-19.09
0.303	N	26.10	10.17	36.27	40.20	-13.93
0.348	N	24.09	10.10	34.19	39.00	-14.81
0.506	N	30.71	9.91	40.62	36.00	-5.38
0.537	L1	15.50	9.89	25.39	36.00	-20.61
0.546	L1	14.51	9.88	24.39	36.00	-21.61
0.555	L1	14.69	9.88	24.57	36.00	-21.43
0.686	N	21.66	9.84	31.50	36.00	-14.50
0.708	L1	17.12	9.83	26.95	36.00	-19.05
0.816	L1	12.81	9.82	22.62	36.00	-23.38
1.199	L1	13.57	9.80	23.37	36.00	-22.63
1.226	N	21.31	9.80	31.11	36.00	-14.89
1.253	L1	12.85	9.80	22.65	36.00	-23.35
1.311	N	24.71	9.80	34.52	36.00	-11.48
1.707	N	21.07	9.82	30.89	36.00	-15.11
2.742	N	21.60	9.87	31.47	36.00	-14.53
3.755	N	18.47	9.90	28.37	36.00	-17.63
6.230	N	17.57	9.93	27.50	40.00	-22.50
11.238	N	19.34	10.00	29.34	40.00	-20.66
26.880	N	21.14	10.43	31.57	40.00	-18.44

All other emission levels had a test margin of greater than 25 dB.
Measurements were done with the quasi-peak and the average detectors.
See figure 1-3 and figure 1-4 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

AC Conducted Emissions Test Graphs

Test Configuration 2

Figure 1-3: L1 lines


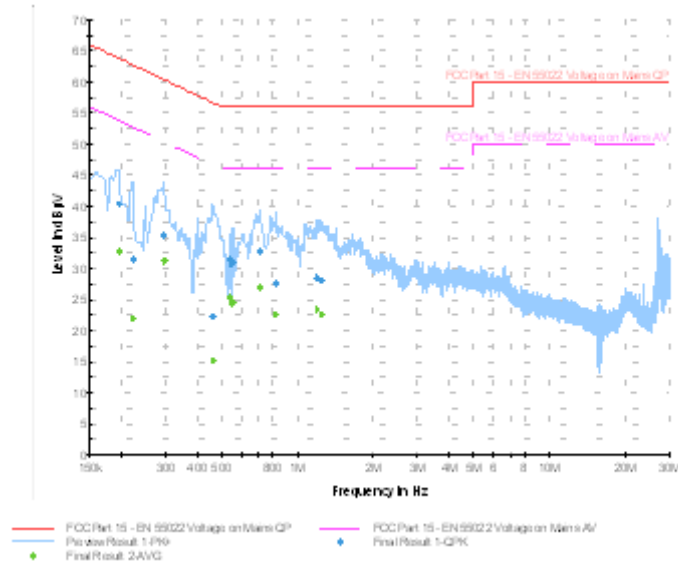



Figure 1-4: N Lines

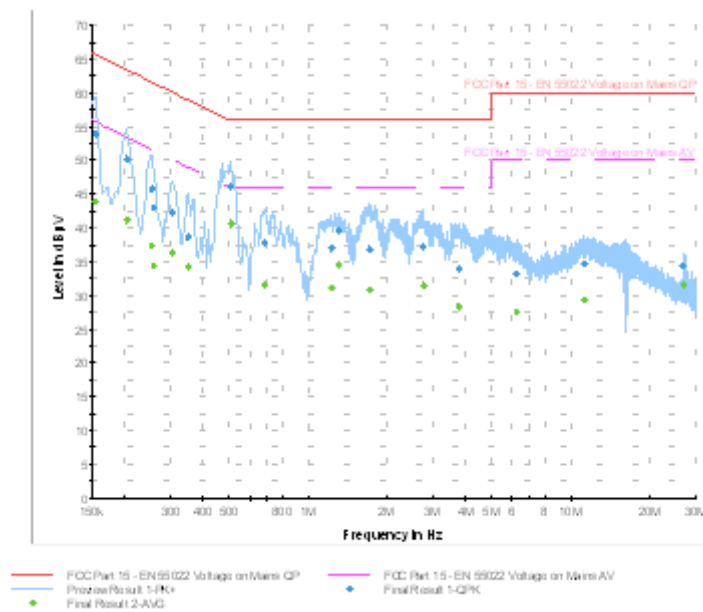

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 1	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

AC Conducted Emissions Test Results cont'd

Test Configuration 3

The BlackBerry® smartphone was tested on November 09, 2012.


The environmental test conditions were: Temperature: 24.5 °C
Relative Humidity: 41.3 %

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dBµV)	Limit (AV) (dBµV)	Margin (QP) Limits (dB)
0.150	N	35.81	11.23	47.04	66.00	56.00	-18.96
0.173	L1	29.78	11.05	40.83	64.80	54.80	-23.97
0.186	L1	34.38	10.95	45.33	64.20	54.20	-18.87
0.195	L1	32.31	10.89	43.20	63.80	53.80	-20.60
0.425	N	26.52	9.98	36.51	57.40	47.40	-20.89
0.479	L1	25.61	9.92	35.53	56.40	46.40	-20.87
0.515	L1	25.75	9.90	35.65	56.00	46.00	-20.35
0.731	N	21.79	9.83	31.63	56.00	46.00	-24.38
0.857	L1	26.21	9.81	36.02	56.00	46.00	-19.98
1.203	N	22.77	9.80	32.57	56.00	46.00	-23.43
1.536	N	23.04	9.81	32.86	56.00	46.00	-23.15

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector.

See figure 1-5 and 1-6 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 1	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

AC Conducted Emissions Test Graphs

Test Configuration 3

Figure 1-5: L1, lines


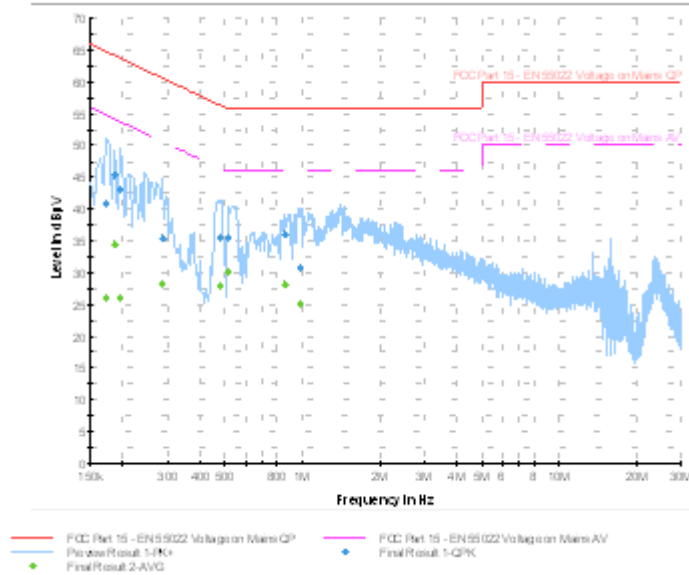




Figure 1-6: N, lines

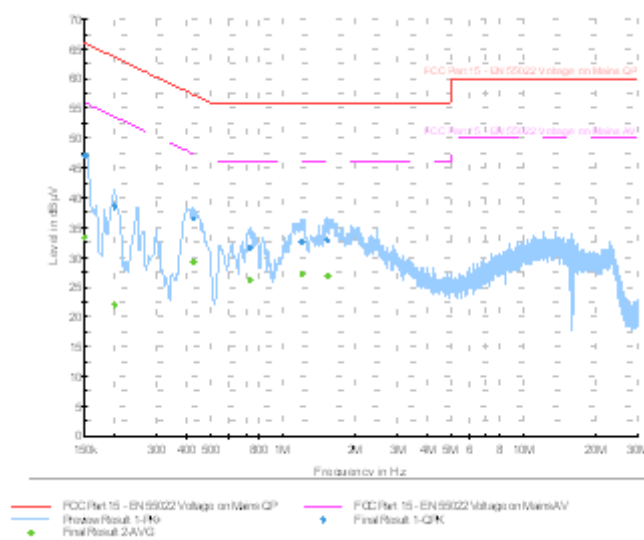

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

**APPENDIX 2 – BLUETOOTH, BLUETOOTH LOW ENERGY AND 802.11b/g/n
RADIATED EMISSIONS TEST DATA**

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Radiated Emissions Test Results
Bluetooth Band

Date of Test: October 10 and 22, 2012
Measurements were performed by Feras Obeid.

The environmental test conditions were: Temperature: 23.8 °C
Relative Humidity: 28.1%

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone in Bluetooth Tx mode was in horizontal position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 39 and 78 using packet types “DH5”, “2-DH5” and “3-DH5”.

All emissions had a test margin of greater than 25.0 dB.

Radiated Emissions Test Results cont'd
Bluetooth Band cont'd

Date of Test: October 15 and November 01-02, 2012
Measurements were performed by Shuo Wang and Forhad Hasnat.


The environmental test conditions were: Temperature: 25.3 -25.3°C
Relative Humidity: 32-41.7 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone in Bluetooth Tx mode was in horizontal down position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 39 and 78 using packet types “DH5”, “2-DH5” and “3-DH5”.

All emissions had a test margin of greater than 25.0 dB.

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

Band-Edge Compliance of RF Radiated Emissions Test Results
Bluetooth Band


Date of test: November 01, 2012
Measurements were performed by Feras Obeid

The environmental test conditions were: Temperature: 24.4 ° C
Relative Humidity: 25.5 %

The BlackBerry® smartphone was in standalone, horizontal position and pattern type “Static PBRS” in “DH5”, “2-DH5” and “3-DH5” modulation during the measurements.

The test distance was 3.0 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
Low Channel, Packet Type DH5										
0	2402	Horn	V	PK	1 MHz	95.58	50.44	45.14	74	-28.86
0	2402	Horn	H	PK	1 MHz	103.81	58.14	45.67	74	-28.33
0	2402	Horn	V	AVE.	10 Hz	66.64	50.44	16.2	54	-37.8
0	2402	Horn	H	AVE.	10 Hz	71.03	58.14	12.89	54	-41.11
High Channel, Packet Type DH5										
78	2480	Horn	V	PK	1 MHz	97.86	51.84	46.02	74	-27.98
78	2480	Horn	H	PK	1 MHz	93.68	47.95	45.73	74	-28.27
78	2480	Horn	V	AVE.	10 Hz	68.16	51.84	16.32	54	-37.68
78	2480	Horn	H	AVE.	10 Hz	66.1	47.95	18.15	54	-35.85
Low Channel, Packet Type 2-DH5										
0	2402	Horn	V	PK	1 MHz	95.66	49.92	45.74	74	-28.26
0	2402	Horn	H	PK	1 MHz	94.61	48.79	45.82	74	-28.18
0	2402	Horn	V	AVE.	10 Hz	65.17	49.92	15.25	54	-38.75
0	2402	Horn	H	AVE.	10 Hz	64.61	48.79	15.82	54	-38.18
High Channel, Packet Type 2-DH5										
78	2480	Horn	V	PK	1 MHz	97.77	50.68	47.09	74	-26.91
78	2480	Horn	H	PK	1 MHz	93.88	49.47	44.41	74	-29.59
78	2480	Horn	V	AVE.	10 Hz	65.76	50.68	15.08	54	-38.92
78	2480	Horn	H	AVE.	10 Hz	64.47	49.47	15	54	-39

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

Band-Edge Compliance of RF Radiated Emissions Test Results cont'd
Bluetooth Band

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
Low Channel, Packet Type 3-DH5										
0	2402	Horn	V	PK	1 MHz	95.15	48.76	46.39	74	-27.61
0	2402	Horn	H	PK	1 MHz	93.87	48.14	45.73	74	-28.27
0	2402	Horn	V	AVE.	10 Hz	64.51	48.76	15.75	54	-38.25
0	2402	Horn	H	AVE.	10 Hz	61.48	48.14	13.34	54	-40.66
High Channel, Packet Type 3-DH5										
78	2480	Horn	V	PK	1 MHz	98.67	50.19	48.48	74	-25.52
78	2480	Horn	H	PK	1 MHz	94.73	48.14	46.59	74	-27.41
78	2480	Horn	V	AVE.	10 Hz	63.56	50.19	13.37	54	-40.63
78	2480	Horn	H	AVE.	10 Hz	61.74	48.14	13.6	54	-40.4

See figures 2-1 to 2-12 for the plots of the Bluetooth band-edge compliance.

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-1: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 DH5, Channel 0, Pol: V, Detector: PK

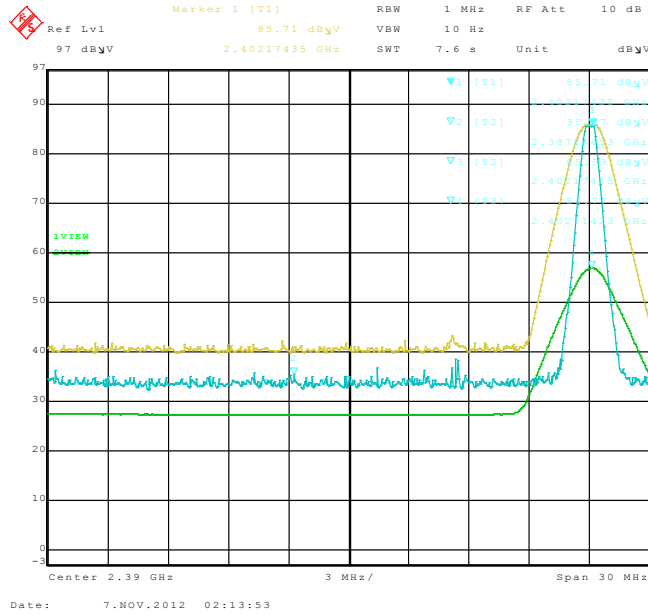


Figure 2-2: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 DH5, Channel 0, Pol: H, Detector: PK

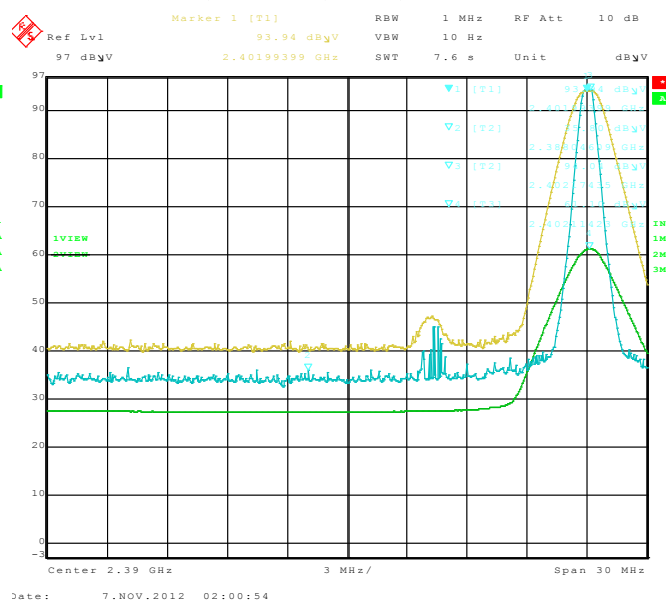


Figure 2-3: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 DH5, Channel 78, Pol: V, Detector: PK


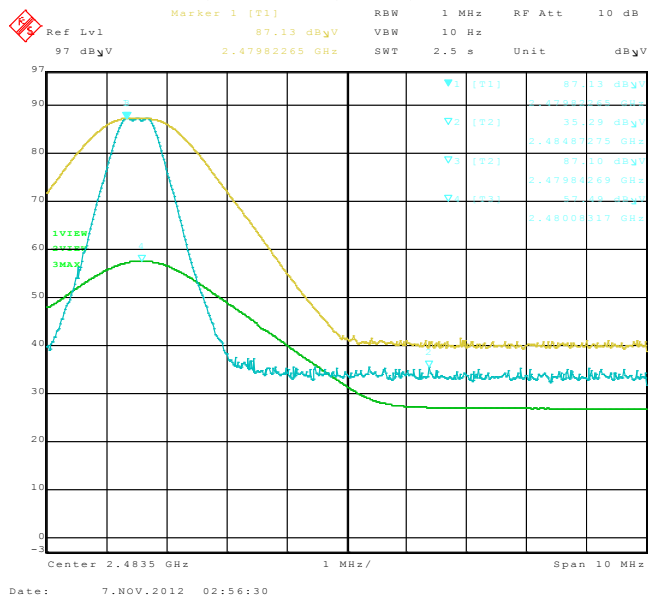


Figure 2-4: Band-Edge Compliance of RF Rad. Emissions
 Bluetooth, Single freq., Static PBRS,
 DH5, Channel 78, Pol: H, Detector: PK

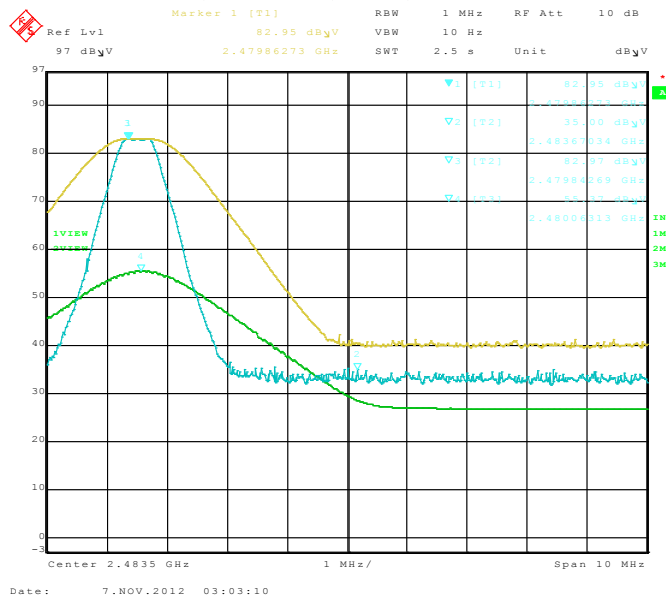

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-5: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 0, Pol: V, Detector: PK

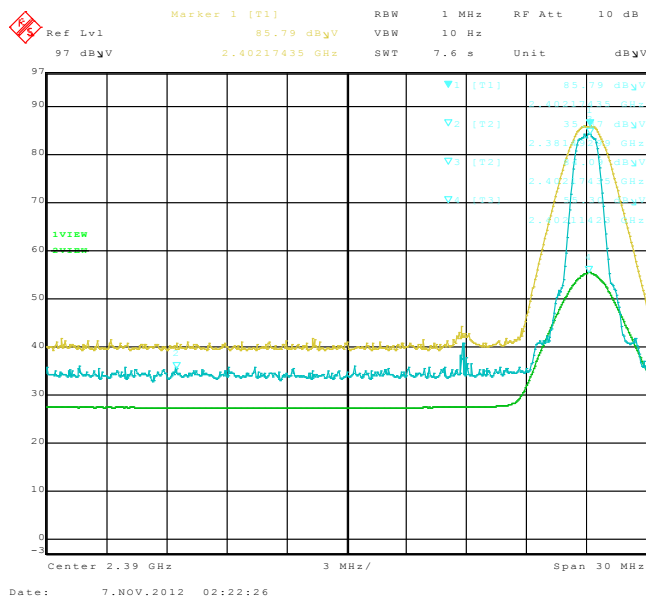


Figure 2-6: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 0, Pol: H, Detector: PK

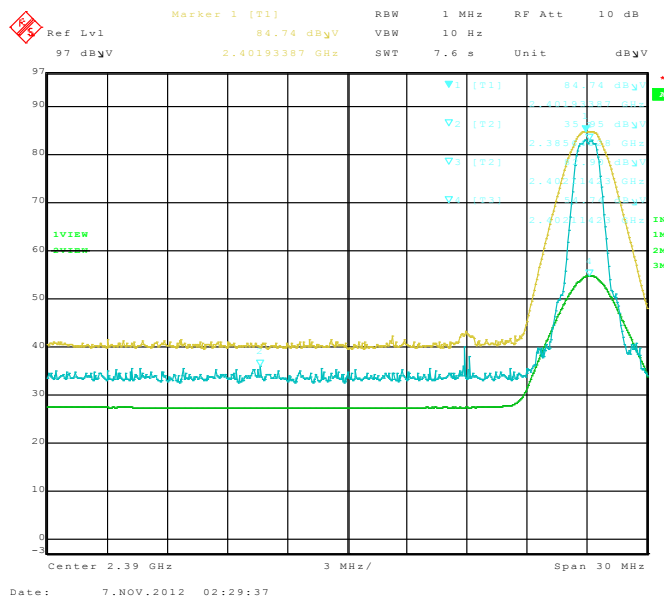


Figure 2-7: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 78, Pol: V, Detector: PK


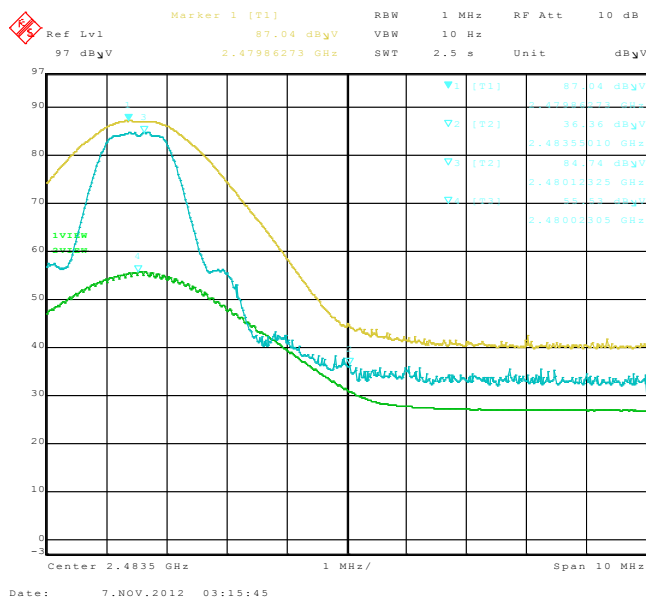


Figure 2-8: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 78, Pol: H, Detector: PK

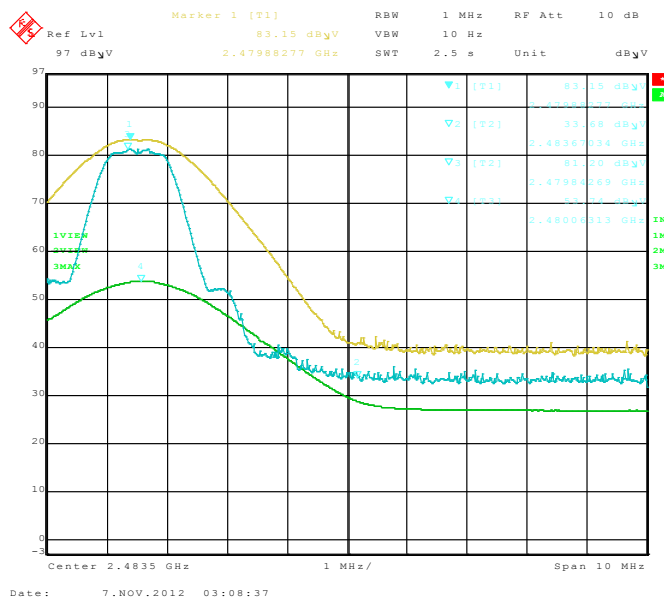

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-9: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 0, Pol: V, Detector: PK

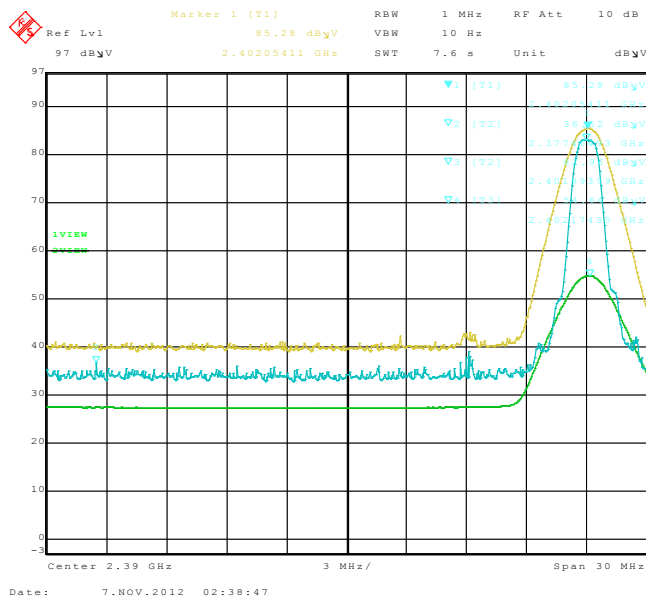


Figure 2-10: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 0, Pol: H, Detector: PK

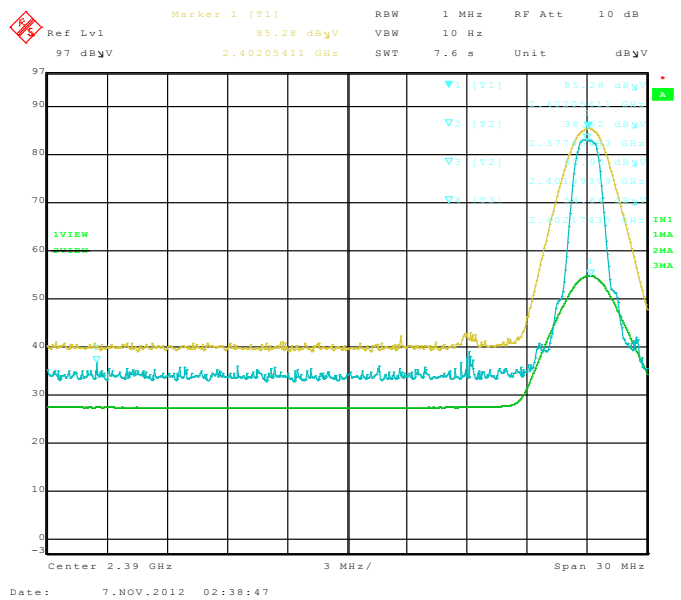


Figure 2-11: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 78, Pol: V, Detector: PK


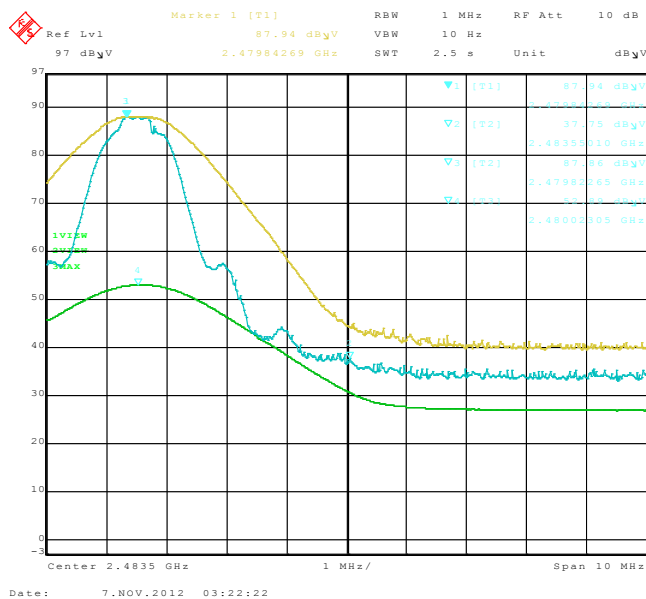



Figure 2-12: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 78, Pol: H, Detector: PK

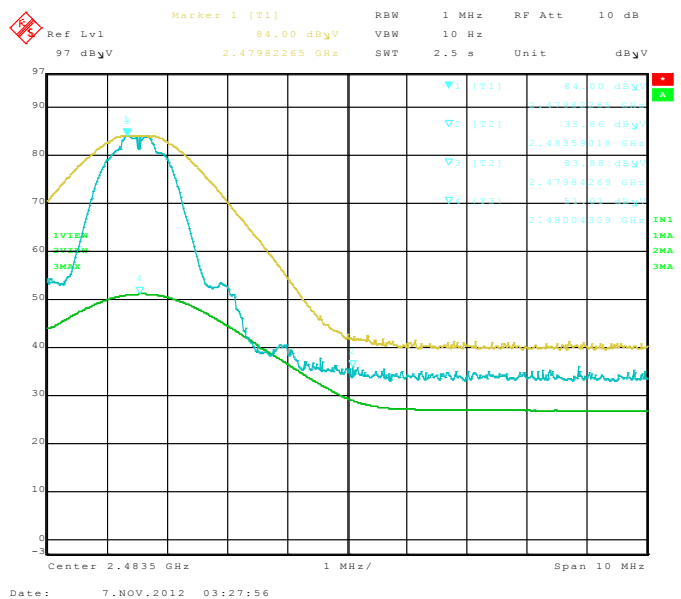

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Radiated Emissions Test Results cont'd
Bluetooth Low Energy Band

Date of Test: November 04, 2012
Measurements were performed by Feras Obeid.

The environmental test conditions were: Temperature: 23.8 °C
Relative Humidity: 28.1 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone in Bluetooth Low Energy Tx mode was in horizontal position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 20 and 39.

All other emissions had a test margin of greater than 25.0 dB.

Date of Test: November 02, 06 and 09, 2012
Measurements were performed by Masud Attayi and Heng Lin


The environmental test conditions were: Temperature: 24.2-25.4 °C
Relative Humidity: 34.4-38.7 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone in Bluetooth Low Energy Tx mode was in horizontal down position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 20 and 39.

All emissions had a test margin of greater than 25.0 dB.

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

Band-Edge Compliance of RF Radiated Emissions Test Results
Bluetooth Low Energy Band

Date of test: November 07, 2012
Measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 24.2-25.4 ° C
Relative Humidity: 34.4-38.7 %

The BlackBerry® smartphone was in horizontal position.

The test distance was 3.0 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
Low Channel, LE										
0	2402	Horn	V	PK	1 MHz	94.55	38.71	55.84	74	-18.16
0	2402	Horn	H	PK	1 MHz	94.13	41.08	53.05	74	-20.95
0	2402	Horn	V	AVE.	10 Hz	73.39	38.71	34.68	54	-19.32
0	2402	Horn	H	AVE.	10 Hz	72.91	41.08	31.83	54	-22.17
High Channel, LE										
39	2441	Horn	V	PK	1 MHz	92.28	46.02	46.26	74	-27.74
39	2441	Horn	H	PK	1 MHz	89.57	45.39	44.18	74	-29.82
39	2441	Horn	V	AVE.	10 Hz	71.19	46.02	25.17	54	-28.83
39	2441	Horn	H	AVE.	10 Hz	69.26	45.39	23.87	54	-30.13

See figures 2-13 to 2-16 for the plots of the Bluetooth Low Energy band-edge compliance.

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth Low Energy Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-13: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth Low Energy, Single freq.,
 LE, Channel 0, Pol: V, Detector: PK

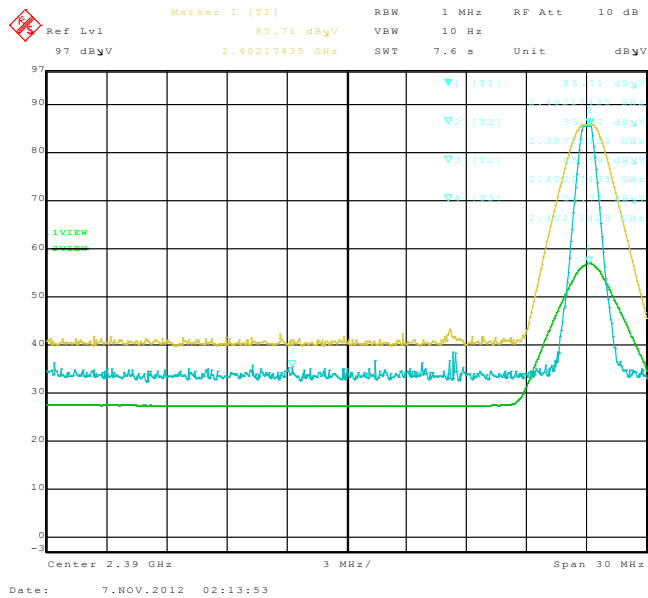


Figure 2-14: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth Low Energy, Single freq.,
 LE, Channel 0, Pol: H, Detector: PK

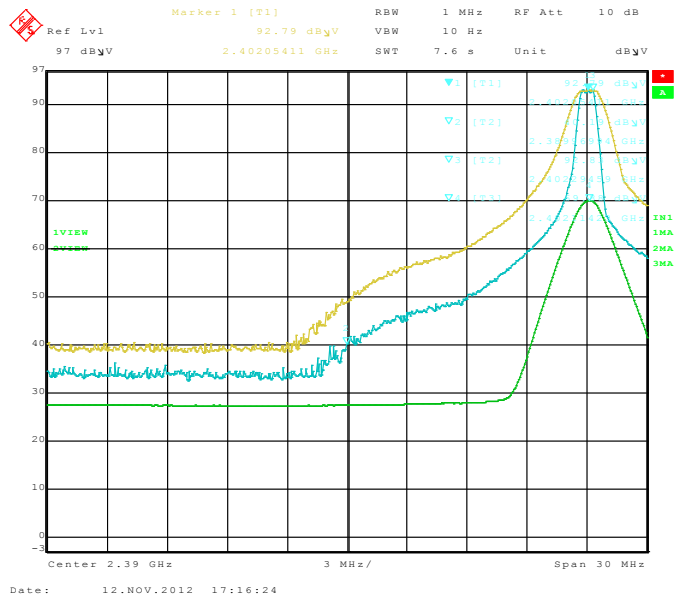


Figure 2-15: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth Low Energy, Single freq.,
 LE, Channel 39, Pol: V, Detector: PK


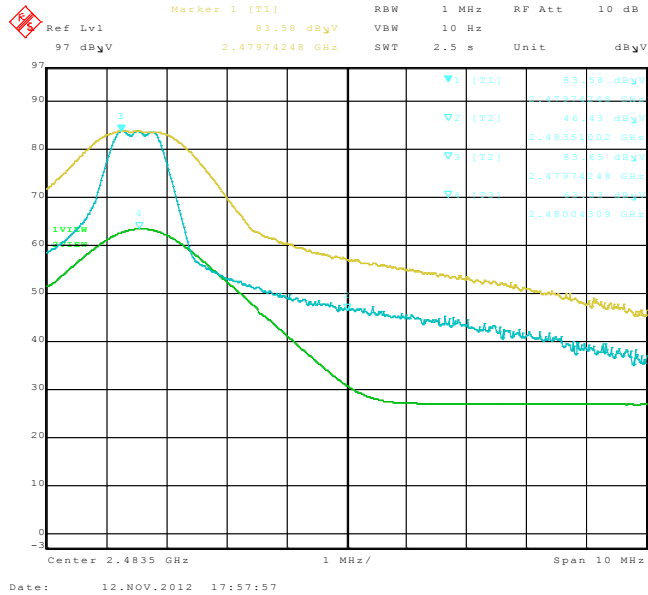



Figure 2-16: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth Low Energy, Single freq.,
 LE, Channel 39, Pol: H, Detector: PK

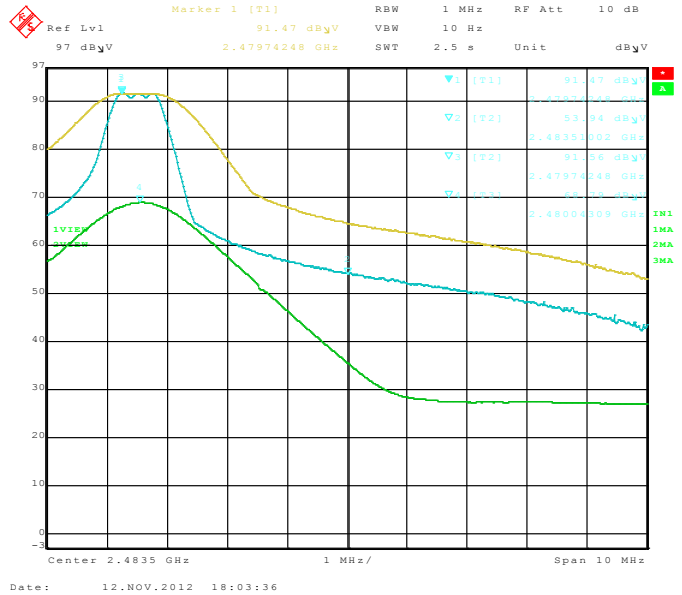

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Radiated Emissions Test Results cont'd
802.11b/g/n Band

Date of Test: October 30, 2012
Measurements performed by Feras Obeid

The environmental test conditions were: Temperature: 23.8°C
Relative Humidity: 28.1 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in USB up position.

The frequency sweep measurements were performed in 802.11b Tx mode at 1 Mbps on channels 1, 6 and 11, in 802.11g Tx mode at 6 Mbps on channels 1, 6 and 11, and in 802.11n Tx mode at MCS 0 on channels 1, 6 and 11.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: October 31 and November 07-08, 2012
Measurements performed by Heng Lin and Forhad Hasnat


The environmental test conditions were: Temperature: 24.8 °C
Relative Humidity: 38.2 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone was in horizontal position.

The frequency sweep measurements were performed in 802.11b Tx mode at 1 Mbps on channels 1, 6 and 11, in 802.11g Tx mode at 6 Mbps on channels 1, 6 and 11, and in 802.11n Tx mode at MCS 0 on channels 1, 6 and 11.

All emissions had a test margin of greater than 25.0 dB.

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11b/g/n Band-Edge Compliance of RF Radiated Emissions

Date of Tests: November 15, 2012
Measurements performed by Feras Obeid.


The environmental test conditions were: Temperature: 25.0 °C
Relative Humidity: 14.5 %

802.11b Band

The measurements were performed on BlackBerry® smartphone in standalone, USB up configuration on channels 1 and 11 for 802.11b mode at 1 Mbps.

The test distance was 3 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW For Peak	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
Low Channel, 802.11b										
1.0	2412.00	Horn	V	PK	1 MHz	109.49	47.96	61.53	74.00	-12.47
1.0	2412.00	Horn	H	PK	1 MHz	105.48	47.79	57.69	74.00	-16.31
1.0	2412.00	Horn	V	AV	10 Hz	105.43	52.01	53.42	54.00	-0.58
1.0	2412.00	Horn	H	AV	10 Hz	101.30	51.80	49.50	54.00	-4.50
High Channel, 802.11b										
11.0	2462.00	Horn	V	PK	1 MHz	104.78	54.34	50.44	74.00	-23.56
11.0	2462.00	Horn	H	PK	1 MHz	107.06	55.76	51.30	74.00	-22.70
11.0	2462.00	Horn	V	AV	10 Hz	100.93	62.77	38.16	54.00	-15.84
11.0	2462.00	Horn	H	AV	10 Hz	102.87	64.41	38.46	54.00	-15.54


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11g Band

The measurements were performed on the BlackBerry® smartphone in standalone, USB up configuration on channels 1 and 11 for 802.11g mode at 6 Mbps.

The test distance was 3 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW For Peak	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
Low Channel , 802.11g										
1.0	2412.00	Horn	V	PK	1 MHz	107.03	47.53	59.50	74.00	-14.50
1.0	2412.00	Horn	H	PK	1 MHz	109.40	49.36	60.04	74.00	-13.96
1.0	2412.00	Horn	V	AV	10 Hz	94.06	53.20	40.86	54.00	-13.14
1.0	2412.00	Horn	H	AV	10 Hz	96.49	55.43	41.06	54.00	-12.94
High Channel, 802.11g										
11.0	2462.00	Horn	V	PK	1 MHz	107.84	44.52	63.32	74.00	-10.68
11.0	2462.00	Horn	H	PK	1 MHz	110.49	43.93	66.56	74.00	-7.44
11.0	2462.00	Horn	V	AV	10 Hz	94.73	52.52	42.21	54.00	-11.79
11.0	2462.00	Horn	H	AV	10 Hz	97.61	53.49	44.12	54.00	-9.88

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 2	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11n Band

The measurements were performed on the BlackBerry® smartphone in standalone, USB up configuration on channels 1 and 11 for 802.11n mode at MCS 0.

The test distance was 3 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW For Peak	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
1.0	2412.00	Horn	V	PK	1 MHz	106.58	46.07	60.51	74.00	-13.49
1.0	2412.00	Horn	H	PK	1 MHz	108.85	46.05	62.80	74.00	-11.20
1.0	2412.00	Horn	V	AV	10 Hz	93.70	52.20	41.50	54.00	-12.50
1.0	2412.00	Horn	H	AV	10 Hz	96.05	53.32	42.73	54.00	-11.27

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW For Peak	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
11.0	2462.00	Horn	V	PK	1 MHz	107.73	42.69	65.04	74.00	-8.96
11.0	2462.00	Horn	H	PK	1 MHz	109.22	42.71	66.51	74.00	-7.49
11.0	2462.00	Horn	V	AV	10 Hz	94.75	50.51	44.24	54.00	-9.76
11.0	2462.00	Horn	H	AV	10 Hz	96.43	50.96	45.47	54.00	-8.53

See figures 2-17 to 2-20 for the plots of the 802.11b band-edge compliance.
See figures 2-21 to 2-24 for the plots of the 802.11g band-edge compliance.
See figures 2-25 to 2-28 for the plots of the 802.11n band-edge compliance.


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11b/g/n Band-Edge Compliance of RF Radiated Emissions cont'd


**Figure 2-17: Band-Edge Compliance of RF Radiated Emission
 802.11b, Channel 1, 2412 MHz, Max Pol: V,
 Detector: PK**

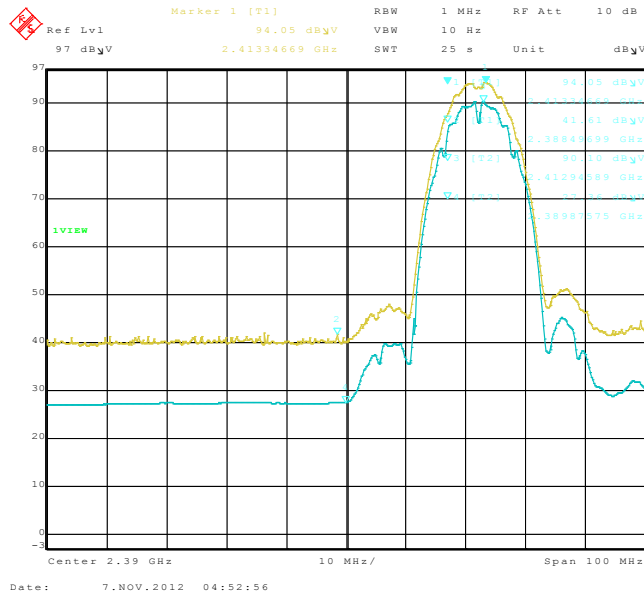


**Figure 2-18: Band-Edge Compliance of RF Radiated Emission
 802.11b, Channel 1, 2412 MHz, Max Pol: H,
 Detector: PK**

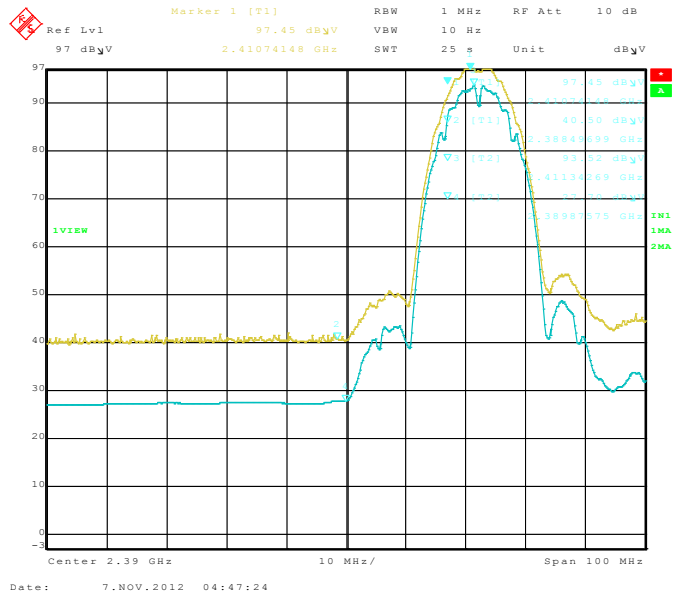

**Figure 2-19: Band-Edge Compliance of RF Radiated Emission
 802.11b, Channel 11, 2462 MHz, Max Pol: V,
 Detector: PK**

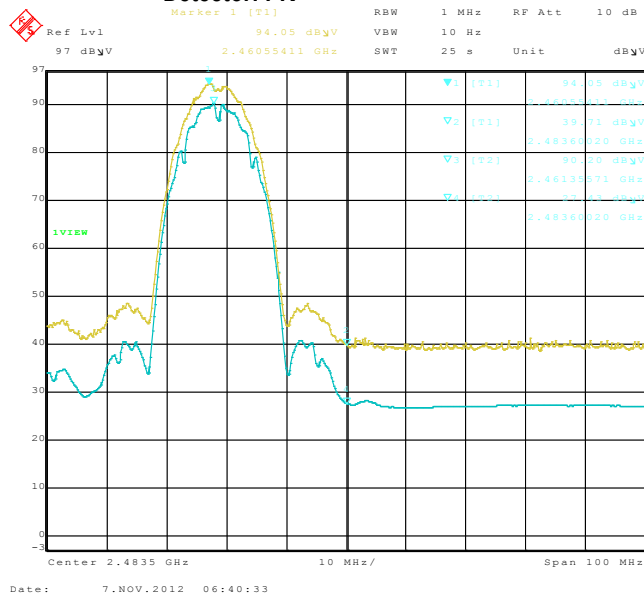

**Figure 2-20: Band-Edge Compliance of RF Radiated Emission
 802.11b, Channel 11, 2462 MHz, Max Pol: H,
 Detector: PK**

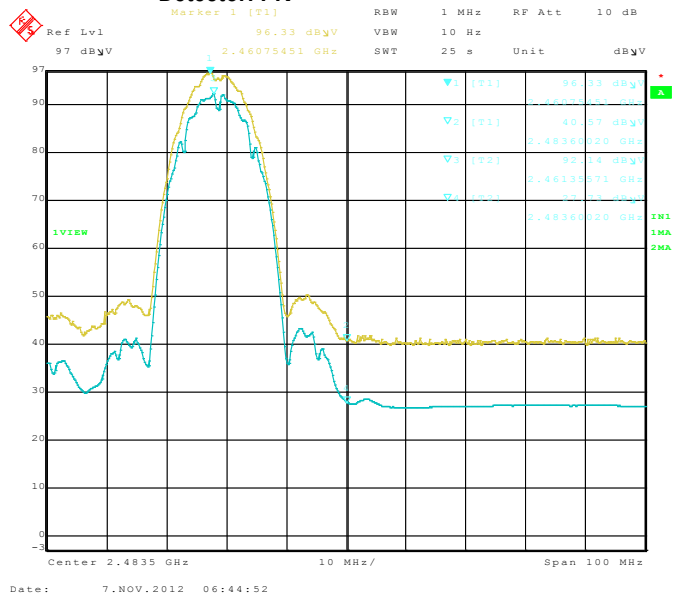


Test Report No.
 RTS-6012-1211-33


Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW


**Figure 2-21: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 1, 2412 MHz, Max Pol: V,
 Detector: PK**

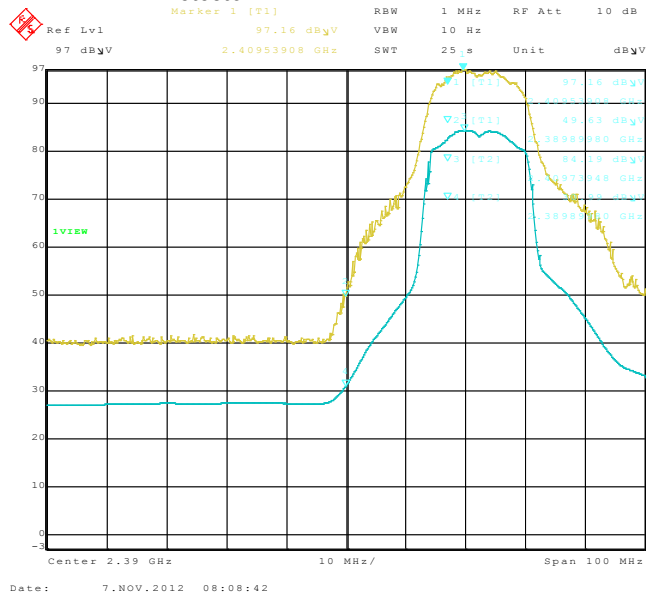


**Figure 2-22: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 1, 2412 MHz, Max Pol: H,
 Detector: PK**

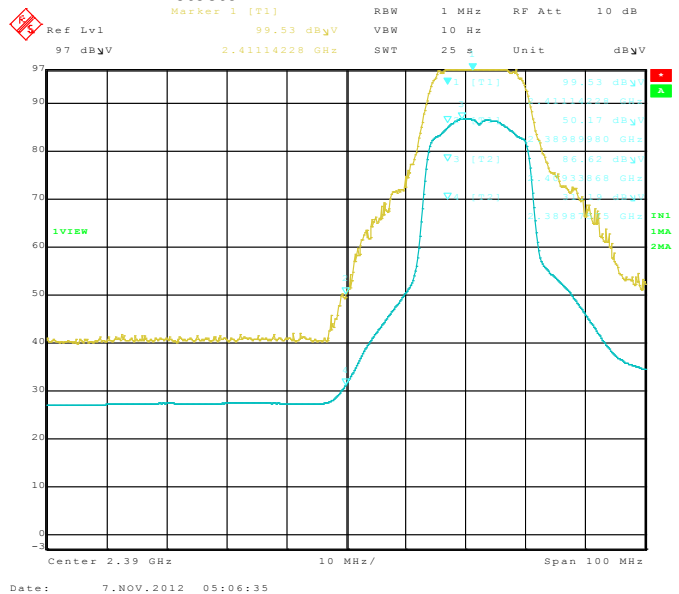

**Figure 2-23: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 11, 2462 MHz, Max Pol: V,
 Detector: PK**

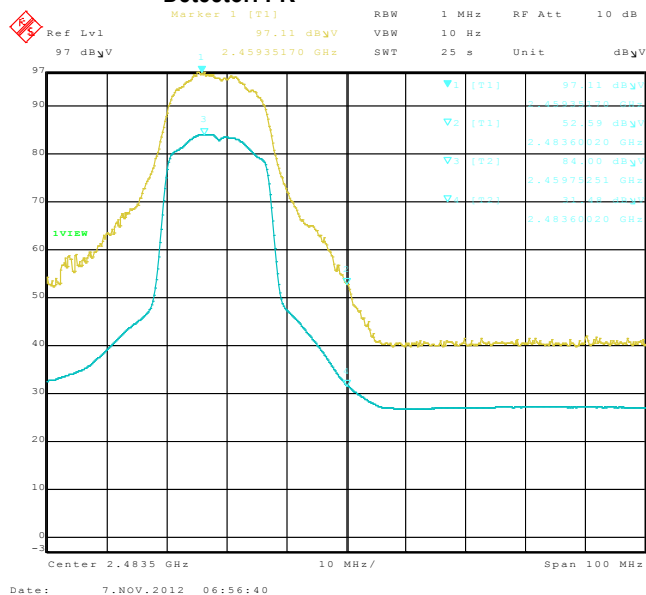

**Figure 2-24: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 11, 2462 MHz, Max Pol: H,
 Detector: PK**

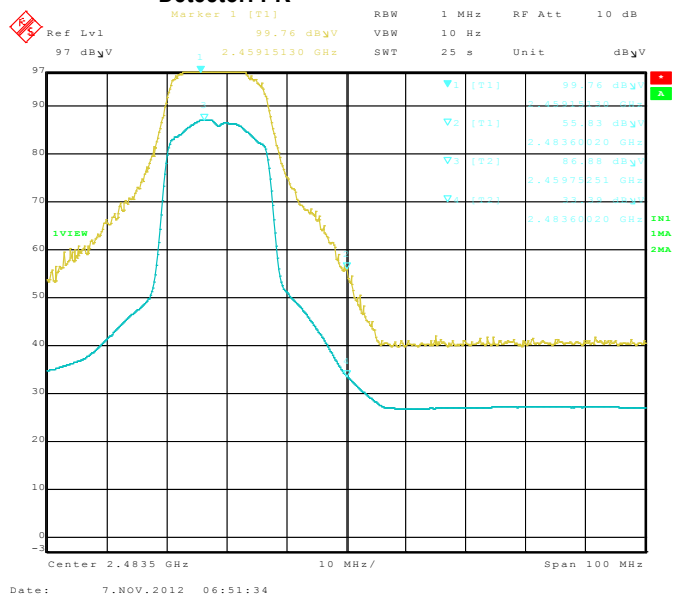

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Figure 2-25: Band-Edge Compliance of RF Radiated Emission 802.11n, Channel 1, 2412 MHz, Max Pol: V, Detector: PK

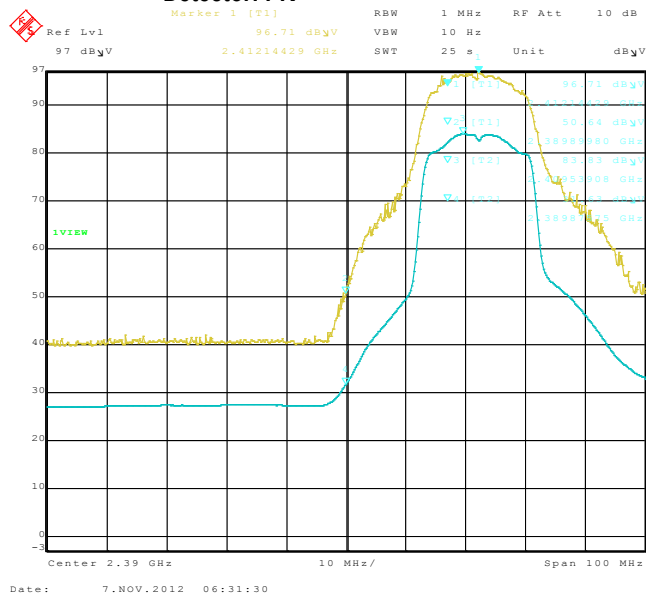


Figure 2-26: Band-Edge Compliance of RF Radiated Emission 802.11n, Channel 1, 2412 MHz, Max Pol: H, Detector: PK

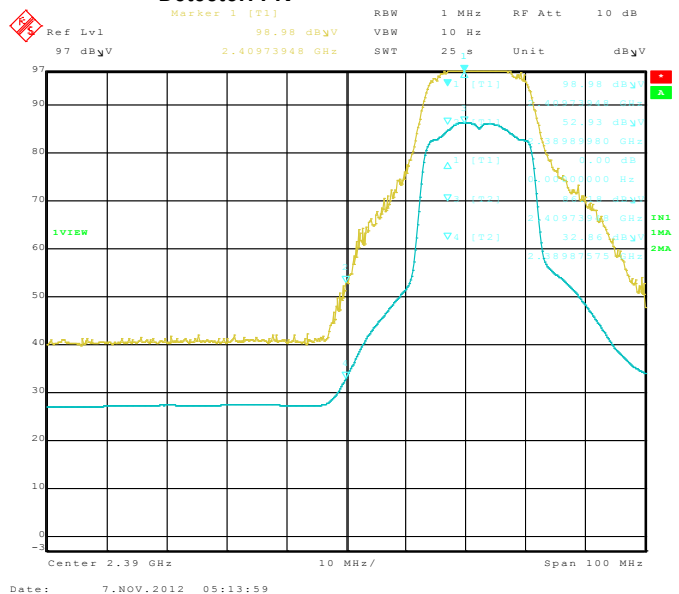


Figure 2-27: Band-Edge Compliance of RF Radiated Emission 802.11n, Channel 11, 2462 MHz, Max Pol: V, Detector: PK


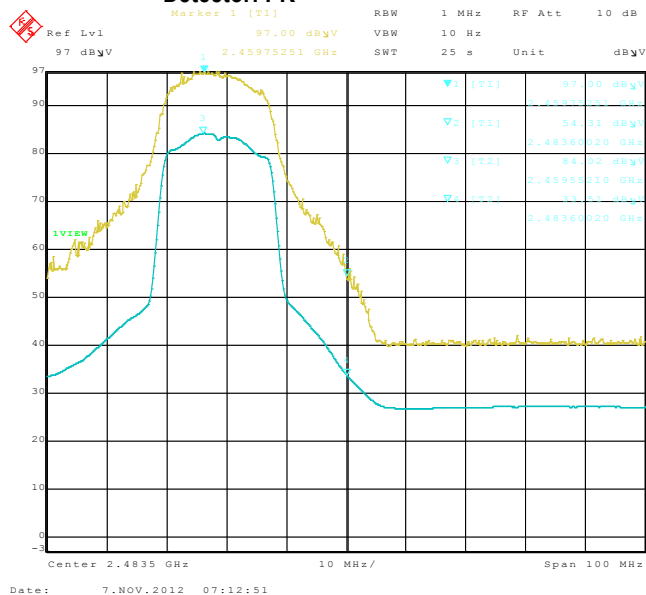




Figure 2-28: Band-Edge Compliance of RF Radiated Emission 802.11n, Channel 11, 2462 MHz, Max Pol: H, Detector: PK

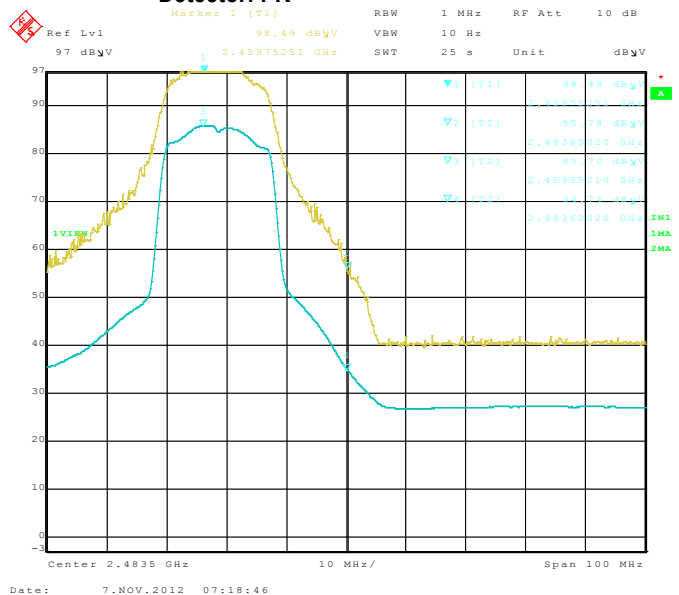

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 3	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

APPENDIX 3 – 802.11a/n RADIATED EMISSIONS TEST DATA

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 3	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Radiated Emissions Test Results
802.11a Band

Date of Test: October 25, 2012
Measurements were performed by Feras Obeid.

The environmental test conditions were: Temperature: 23.8 °C
Relative Humidity: 28.1 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in USB up position.

The frequency sweep measurements were performed in 802.11a Tx mode at 6 Mbps on channels 36, 48, 64, 100, 140 and 165.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: October 31, November 01 and 06-09, 2012
Measurements were performed by Heng Lin and Forhad Hasnat


The environmental test conditions were: Temperature: 24.2-25.9°C
Relative Humidity: 31.6-41 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 40GHz.

The BlackBerry® smartphone was in horizontal position.

The frequency sweep measurements were performed in 802.11a Tx mode at 6 Mbps on channels 36, 48, 64, 100, 140 and 165.

All emissions had a test margin of greater than 25.0 dB.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 3	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Radiated Emissions Test Results cont'd
802.11n Band

Date of Test: October 30, 2012
Measurements were performed by Feras Obeid.

The environmental test conditions were: Temperature: 23.8 °C
Relative Humidity: 28.1%

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in USB up position.

The frequency sweep measurements were performed in 802.11n Tx mode at MCS 0 on channels 36, 48, 64, 100, 140 and 165.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: October 31, November 01 and 06-09, 2012
Measurements were performed by Heng Lin.


The environmental test conditions were: Temperature: 24.2-25.9°C
Relative Humidity: 31.6-41 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 40GHz.

The BlackBerry® smartphone was in horizontal position.

The frequency sweep measurements were performed in 802.11n Tx mode at MCS 0 on channels 36, 48, 64, 100, 140 and 165.

All emissions had a test margin of greater than 25.0 dB.

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 3	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11a Band-Edge Compliance of RF Radiated Emissions

Date of Tests: November 09, 2012
Measurements performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 25.7 °C
Relative Humidity: 21.1 %

The measurements were performed on BlackBerry® smartphone in standalone, USB up configuration on channels 36, 64, 100, 140, 149 and 165 for 802.11a mode at 6 Mbps.

The test distance was 3 metres.

Centre at Band-Edge: 5150 MHz


Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
36.0	5180.0	Horn	V	PK	1 MHz	106.81	42.86	63.95	74.00	-10.05
36.0	5180.0	Horn	H	PK	1 MHz	106.94	43.08	63.86	74.00	-10.14
36.0	5180.0	Horn	V	AV	10 Hz	94.14	43.93	50.21	54.00	-3.79
36.0	5180.0	Horn	H	AV	10 Hz	94.17	44.00	50.17	54.00	-3.83

Centre at Band-Edge: 5350 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
64.0	5320.0	Horn	V	PK	1 MHz	109.12	44.54	64.58	74.00	-9.42
64.0	5320.0	Horn	H	PK	1 MHz	108.57	43.84	64.73	74.00	-9.27
64.0	5320.0	Horn	V	AV	10 Hz	96.81	45.16	51.65	54.00	-2.35
64.0	5320.0	Horn	H	AV	10 Hz	96.41	44.96	51.45	54.00	-2.55

Centre at Band-Edge: 5460 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
100.0	5500.0	Horn	V	PK	1 MHz	106.43	40.04	66.39	74.00	-7.61
100.0	5500.0	Horn	H	PK	1 MHz	109.37	43.15	66.22	74.00	-7.78
100.0	5500.0	Horn	V	AV	10 Hz	94.65	41.98	52.67	54.00	-1.33
100.0	5500.0	Horn	H	AV	10 Hz	97.52	44.60	52.92	54.00	-1.08

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 3		
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012		FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Centre at Band-Edge: 5725 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
140.0	5700.0	Horn	V	PK	1 MHz	105.17	38.97	66.20	68.20	-2.00
140.0	5700.0	Horn	H	PK	1 MHz	109.00	42.09	66.91	68.20	-1.29

Centre at Band-Edge: 5725 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
149.0	5745.0	Horn	V	PK	1 MHz	104.67	37.65	67.02	78.20	-11.18
149.0	5745.0	Horn	H	PK	1 MHz	107.85	39.86	67.99	78.20	-10.21

Centre at Band-Edge: 5715 MHz


Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
149.0	5745.0	Horn	V	PK	1 MHz	104.67	38.32	66.35	68.20	-1.85
149.0	5745.0	Horn	H	PK	1 MHz	107.85	41.51	66.34	68.20	-1.86

Centre at Band-Edge: 5805 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dBc)	Remarks
		Type	POL.					
165.0	5825.0	Horn	V	PK	1 MHz	103.67	36.33	No restricted band on border; 20dBc requirement valid instead
165.0	5825.0	Horn	H	PK	1 MHz	108.26	40.69	

Centre at Band-Edge: 5850 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dBc)	Remarks
		Type	POL.					
165.0	5825.0	Horn	V	PK	1 MHz	103.67	36.33	No restricted band on border; 20dBc requirement valid instead
165.0	5825.0	Horn	H	PK	1 MHz	108.26	40.69	

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 3	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11n Band-Edge Compliance of RF Radiated Emissions

Date of Tests: November 09, 2012
Measurements performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 25.7 °C
Relative Humidity: 21.1 %

The measurements were performed on BlackBerry® smartphone in standalone, USB up configuration on channels 36, 64 and 165 for 802.11n mode at MCS 0.

The test distance was 3 metres.

Centre at Band-Edge: 5150 MHz


Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
36.0	5180.0	Horn	V	PK	1 MHz	106.35	42.41	63.94	74.00	-10.06
36.0	5180.0	Horn	H	PK	1 MHz	106.03	41.70	64.33	74.00	-9.67
36.0	5180.0	Horn	V	AV	10 Hz	93.60	43.36	50.24	54.00	-3.76
36.0	5180.0	Horn	H	AV	10 Hz	93.85	43.64	50.21	54.00	-3.79

Centre at Band-Edge: 5350 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
64.0	5320.0	Horn	V	PK	1 MHz	109.26	44.27	64.99	74.00	-9.01
64.0	5320.0	Horn	H	PK	1 MHz	108.37	43.55	64.82	74.00	-9.18
64.0	5320.0	Horn	V	AV	10 Hz	96.46	44.75	51.71	54.00	-2.29
64.0	5320.0	Horn	H	AV	10 Hz	95.86	44.38	51.48	54.00	-2.52

Centre at Band-Edge: 5470 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
100.0	5500.0	Horn	V	PK	1 MHz	105.83	39.49	66.34	74.00	-7.66
100.0	5500.0	Horn	H	PK	1 MHz	109.28	43.96	65.32	74.00	-8.68
100.0	5500.0	Horn	V	AV	10 Hz	94.20	41.53	52.67	54.00	-1.33
100.0	5500.0	Horn	H	AV	10 Hz	97.31	44.37	52.94	54.00	-1.06

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 3		
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW		

802.11n Band-Edge Compliance of RF Radiated Emissions cont'd

Centre at Band-Edge: 5725 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
140.0	5700.0	Horn	V	PK	1 MHz	105.00	37.89	67.11	68.20	-1.09
140.0	5700.0	Horn	H	PK	1 MHz	109.00	42.03	66.97	68.20	-1.23

Centre at Band-Edge: 5725 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
149.0	5745.0	Horn	V	PK	1 MHz	105.14	38.61	66.53	78.20	-11.67
149.0	5745.0	Horn	H	PK	1 MHz	108.18	37.97	70.21	78.20	-7.99

Centre at Band-Edge: 5715 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
149.0	5745.0	Horn	V	PK	1 MHz	105.14	38.77	66.37	68.20	-1.83
149.0	5745.0	Horn	H	PK	1 MHz	108.18	41.84	66.34	68.20	-1.86

Centre at Band-Edge: 5805 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dBc)	Remarks
		Type	POL.					
165.0	5825.0	Horn	V	PK	1 MHz	103.69	38.77	No restricted band on border; 20dBc requirement valid instead
165.0	5825.0	Horn	H	PK	1 MHz	107.49	41.84	

Centre at Band-Edge: 5850 MHz

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading (dBuV/m)	Delta Marker (dBc)	Remarks
		Type	POL.					
165.0	5825.0	Horn	V	PK	1 MHz	103.69	38.77	No restricted band on border; 20dBc requirement valid instead
165.0	5825.0	Horn	H	PK	1 MHz	107.49	41.84	

See figures 3-1 to 3-16 for the plots of the 802.11a band-edge compliance and figures 3-17 to 3-24 for the plots of the 802.11n band-edge.

Test Report No.
RTS-6012-1211-33

Dates of Test
October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-1: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch 36, 5180 MHz, Centre of Band-Edge: 5150 MHz Pol: V, Detector: PK

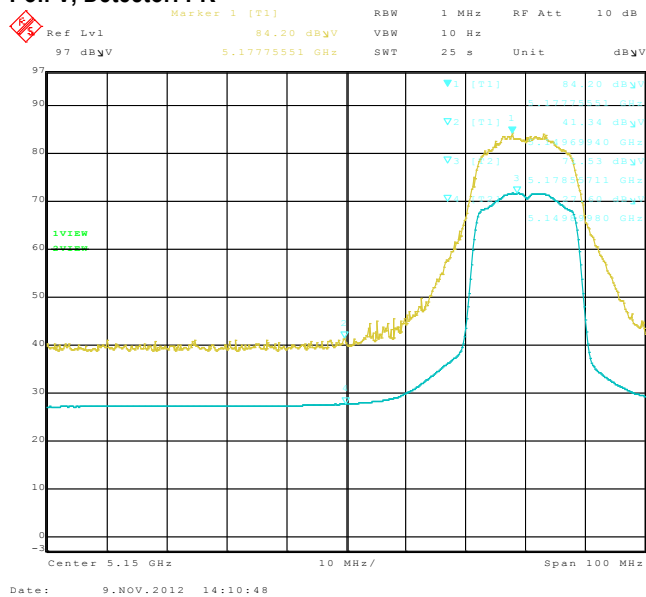


Figure 3-2: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch 36, 5180 MHz, Centre of Band-Edge: 5150 MHz Pol: H, Detector: PK

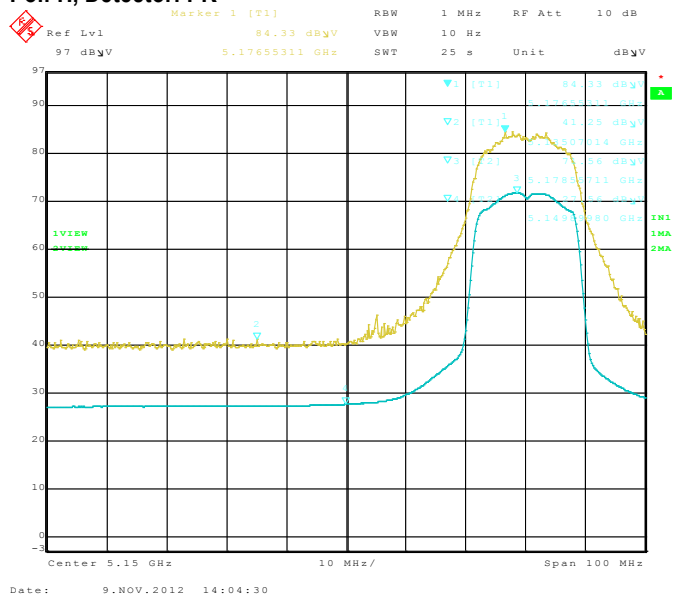


Figure 3-3: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch 64, 5320 MHz, Centre of Band-Edge: 5350 MHz Pol: V, Detector: PK


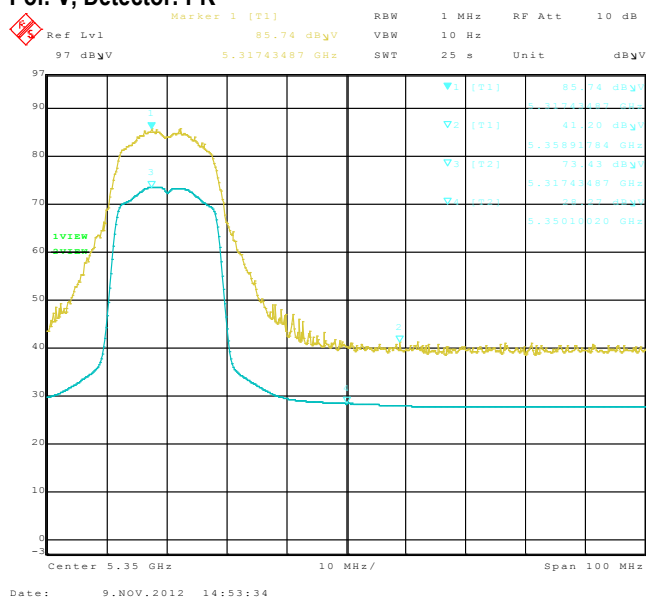


Figure 3-4: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch 64, 5320 MHz, Centre of Band-Edge: 5350 MHz Pol: H, Detector: PK

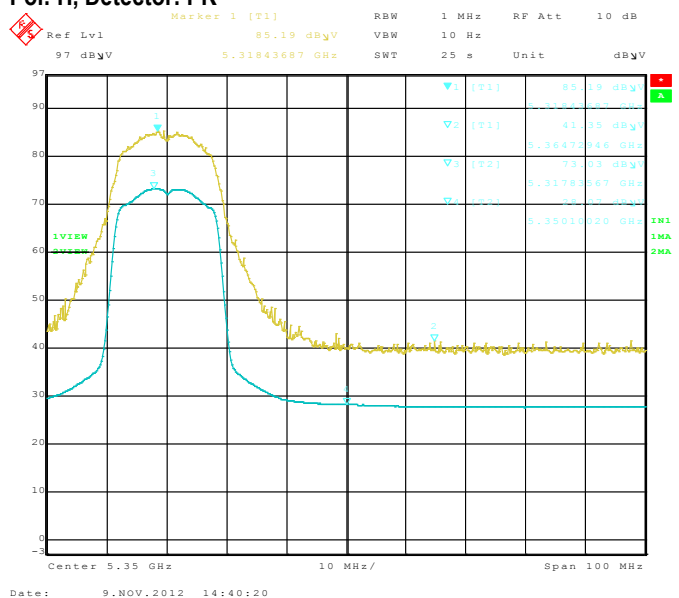

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-5: Band-Edge Compliance of RF Radiated Emission
 802.11a, Ch 100, 5500 MHz, Centre of Band-Edge: 5460 MHz
 Pol: V, Detector: PK

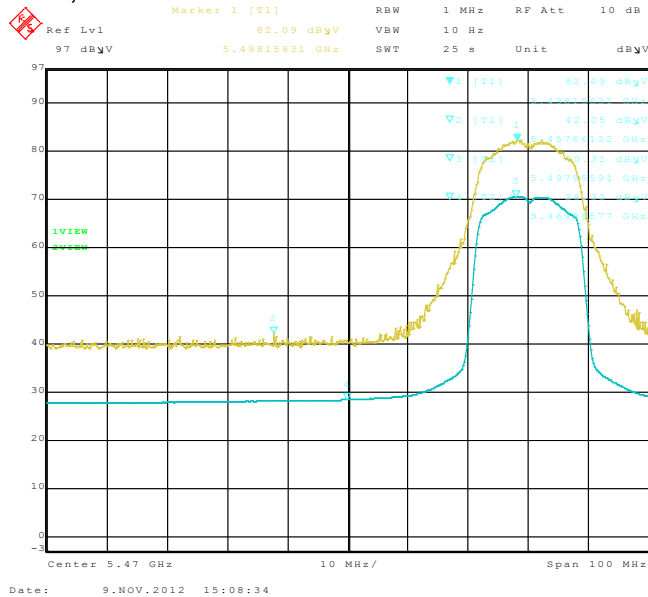


Figure 3-6: Band-Edge Compliance of RF Radiated Emission.
 802.11a, Ch 100, 5500 MHz, Centre of Band-Edge: 5460 MHz
 Pol: H, Detector: PK

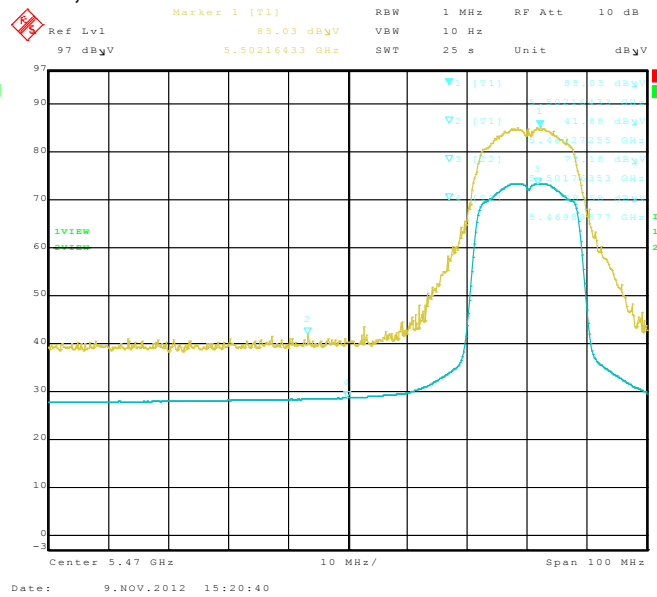


Figure 3-7: Band-Edge Compliance of RF Radiated Emission.
 802.11a, Ch 140, 5700 MHz, Centre of Band-Edge: 5725 MHz
 Pol: V, Detector: PK


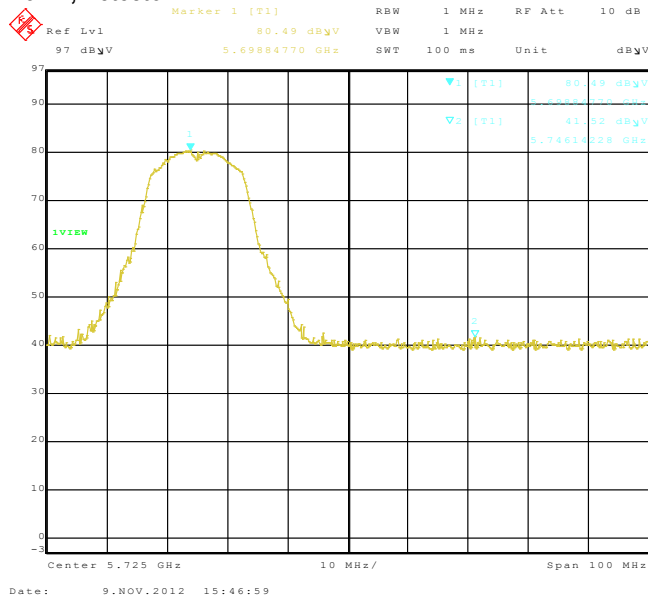


Figure 3-8: Band-Edge Compliance of RF Radiated Emission.
 802.11a, Ch 140, 5700 MHz, Centre of Band-Edge: 5725 MHz
 Pol: H, Detector: PK

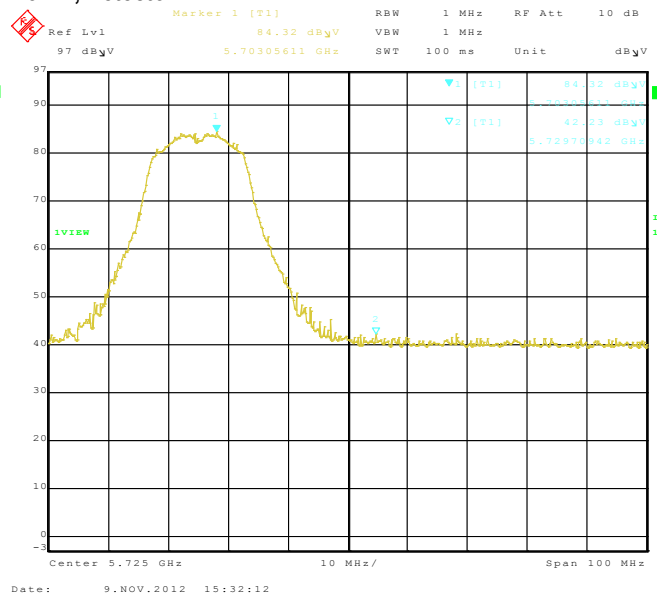

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-9: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch 149, 5745 MHz, Centre of Band-Edge: 5725 MHz Pol: V, Detector: PK

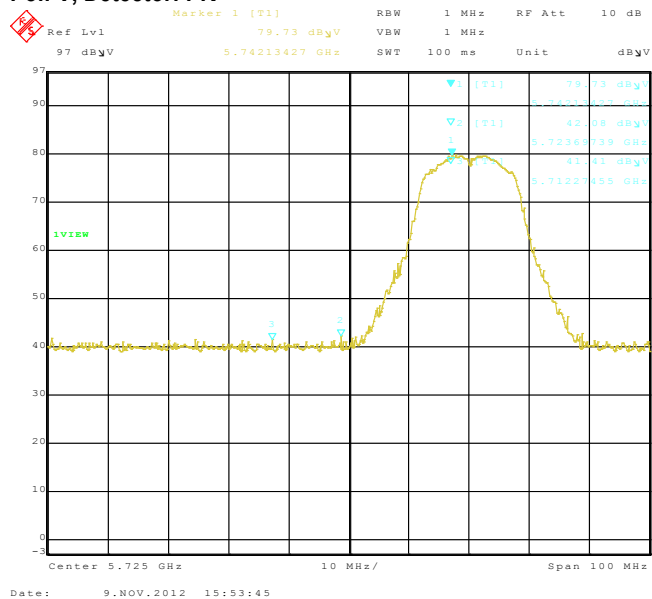


Figure 3-10: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch 149, 5745 MHz, Centre of Band-Edge: 5725 MHz Pol: H, Detector: PK

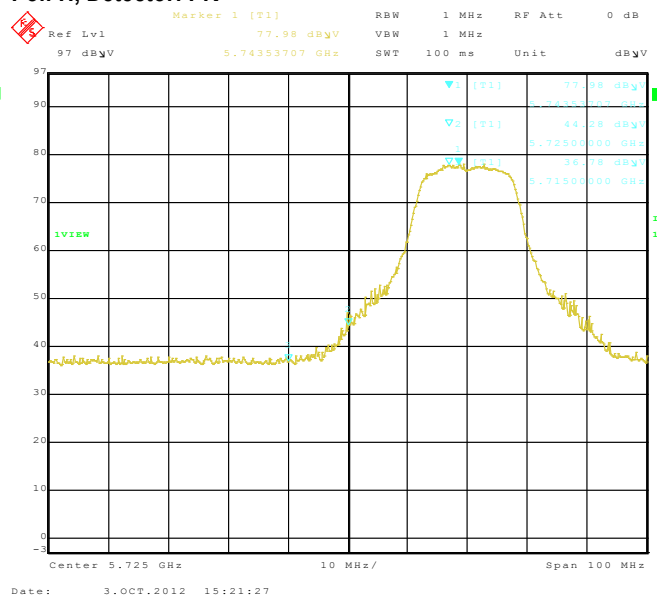


Figure 3-11: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch 149, 5745 MHz, Centre of Band-Edge: 5715 MHz Pol: V, Detector: PK


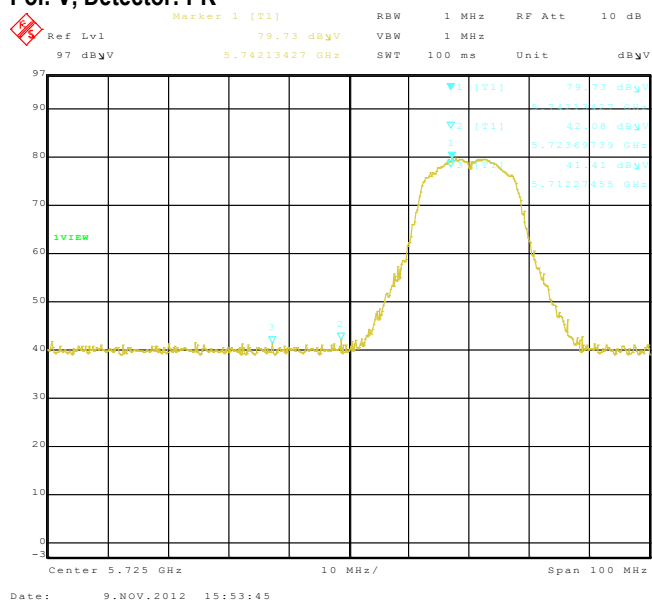



Figure 3-12: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch 149, 5745 MHz, Centre of Band-Edge: 5715 MHz Pol: H, Detector: PK

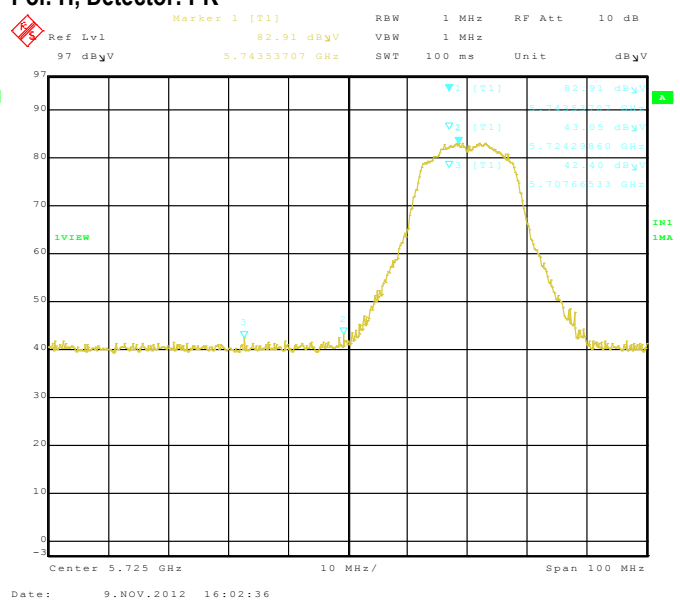

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 3	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-13: Band-Edge Compliance of RF Radiated Emission 802.11a, Ch 165, 5825 MHz, Centre of Band-Edge: 5805 MHz Pol: V, Detector: PK

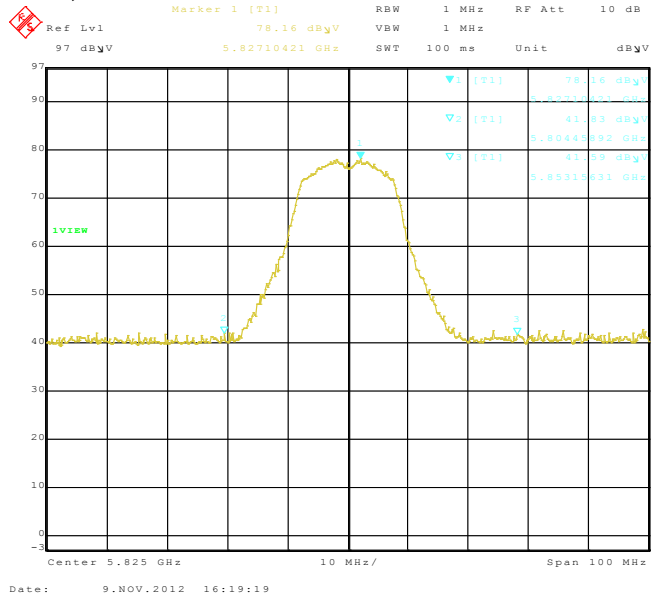


Figure 3-14: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch 165, 5825 MHz, Centre of Band-Edge: 5805 MHz Pol: H, Detector: PK

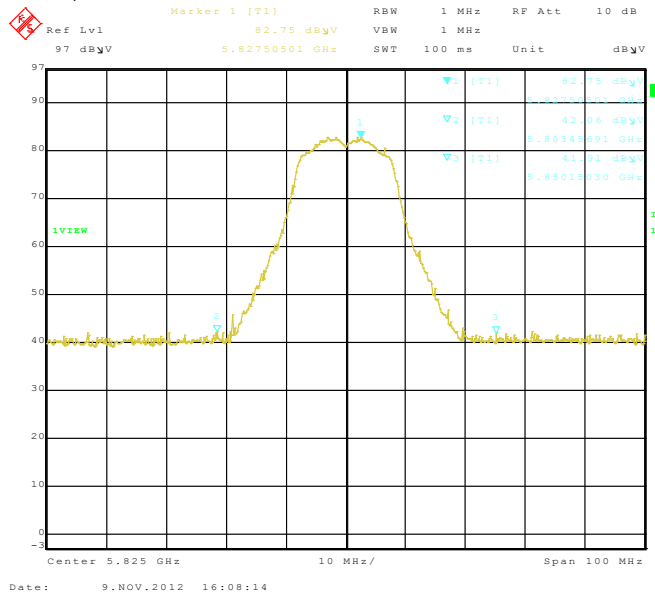


Figure 3-15: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch 165, 5825 MHz, Centre of Band-Edge: 5850 MHz Pol: V, Detector: PK


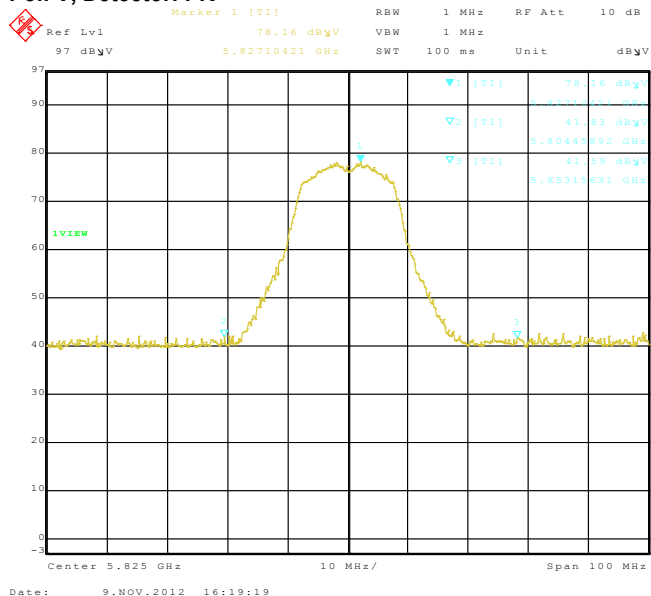


Figure 3-16: Band-Edge Compliance of RF Radiated Emission. 802.11a, Ch 165, 5825 MHz, Centre of Band-Edge: 5850 MHz Pol: H, Detector: PK

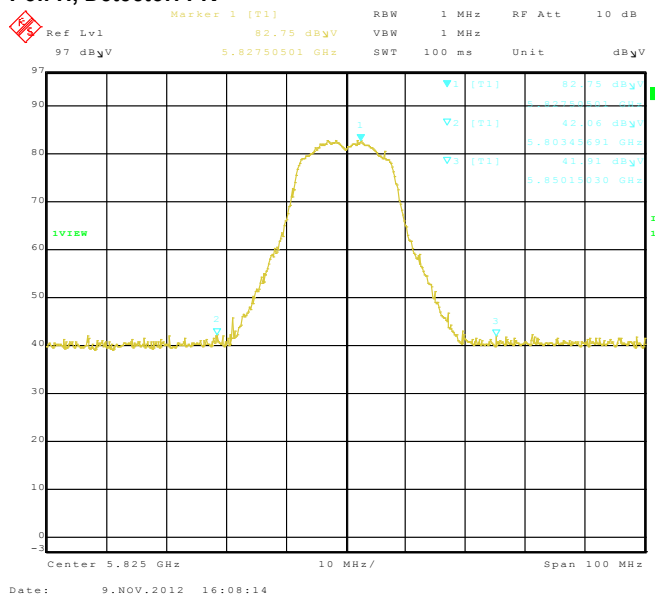

Test Report No.
RTS-6012-1211-33

Dates of Test
October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11n Band-Edge Compliance of RF Radiated Emissions

Figure 3-17: Band-Edge Compliance of RF Radiated Emission 802.11n, Ch 36, 5180 MHz, Centre of Band-Edge: 5150 MHz Pol: V, Detector: PK

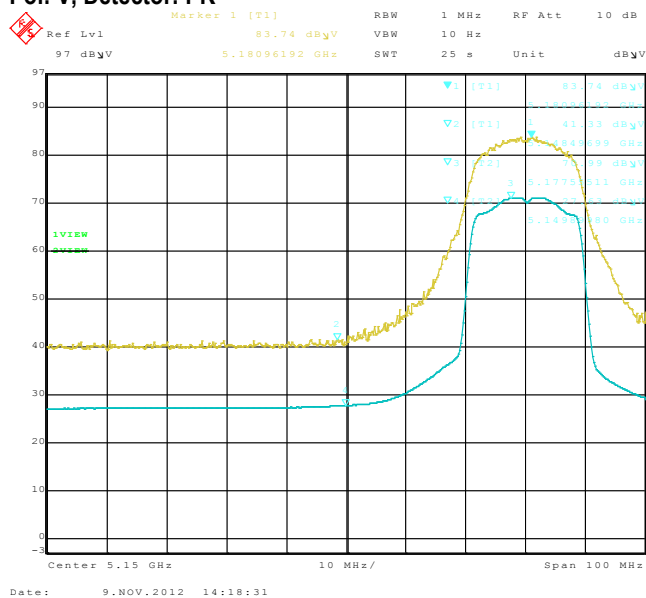


Figure 3-18: Band-Edge Compliance of RF Radiated Emission 802.11n, Ch 36, 5180 MHz, Centre of Band-Edge: 5150 MHz Pol: H, Detector: PK

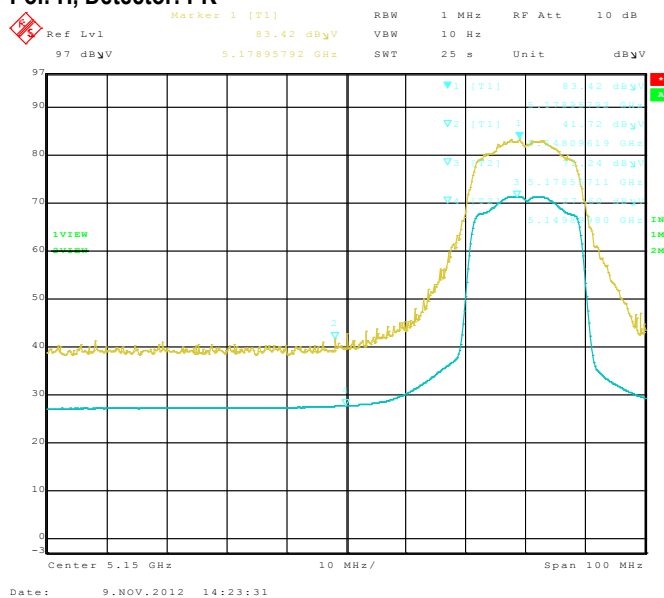


Figure 3-19: Band-Edge Compliance of RF Radiated Emission 802.11n, Ch 64, 5320 MHz, Centre of Band-Edge: 5350 MHz Pol: V, Detector: PK


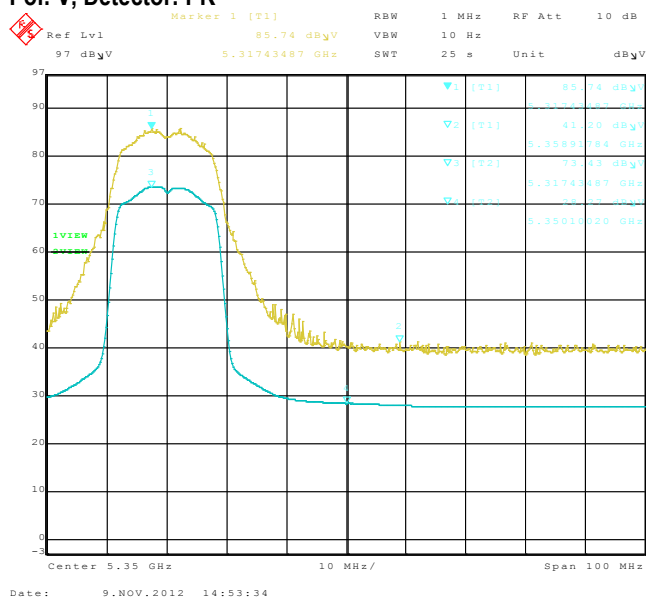


Figure 3-20: Band-Edge Compliance of RF Radiated Emission 802.11n, Ch 64, 5320 MHz, Centre of Band-Edge: 5350 MHz Pol: H, Detector: PK

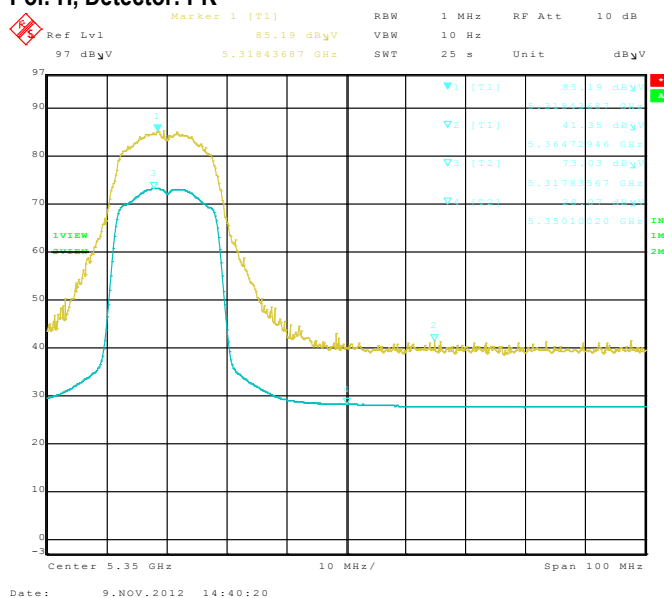

Test Report No.
RTS-6012-1211-33

Dates of Test
October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11n Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-21: Band-Edge Compliance of RF Radiated Emission
802.11n, Ch 100, 5500 MHz, Centre of Band-Edge: 5460 MHz
Pol: V, Detector: PK

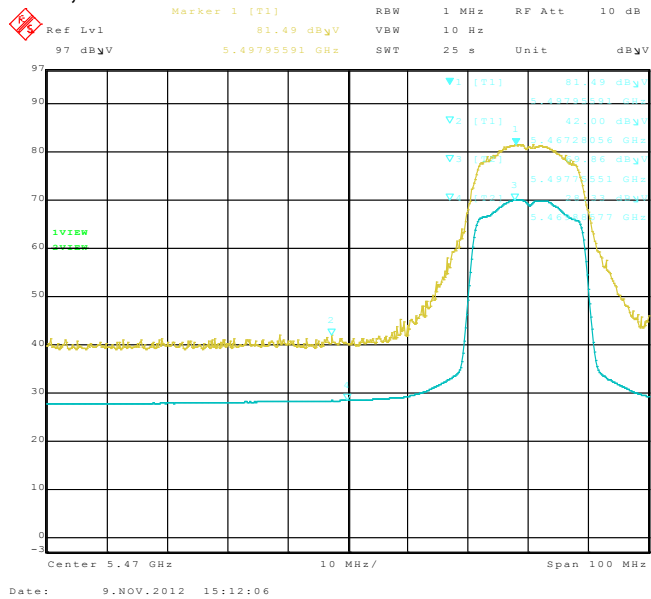


Figure 3-22: Band-Edge Compliance of RF Radiated Emission.
802.11n, Ch 100, 5500 MHz, Centre of Band-Edge: 5460 MHz
Pol: H, Detector: PK

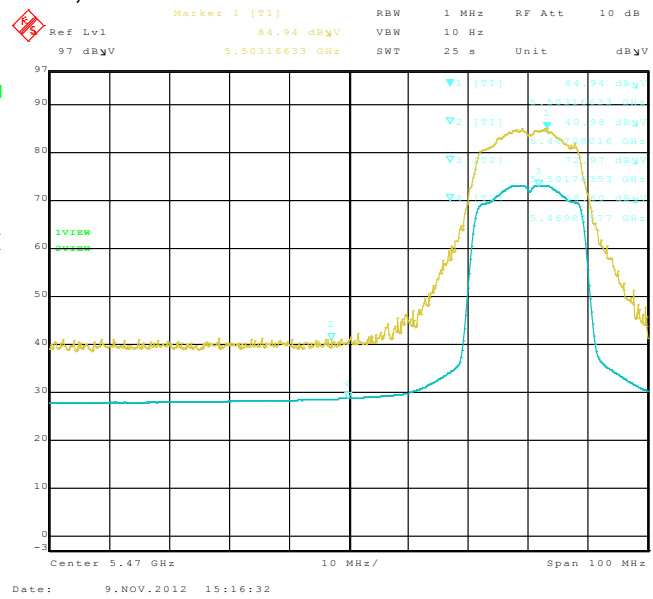


Figure 3-23: Band-Edge Compliance of RF Radiated Emission.
802.11n, Ch 140, 5700 MHz, Centre of Band-Edge: 5725 MHz
Pol: V, Detector: PK


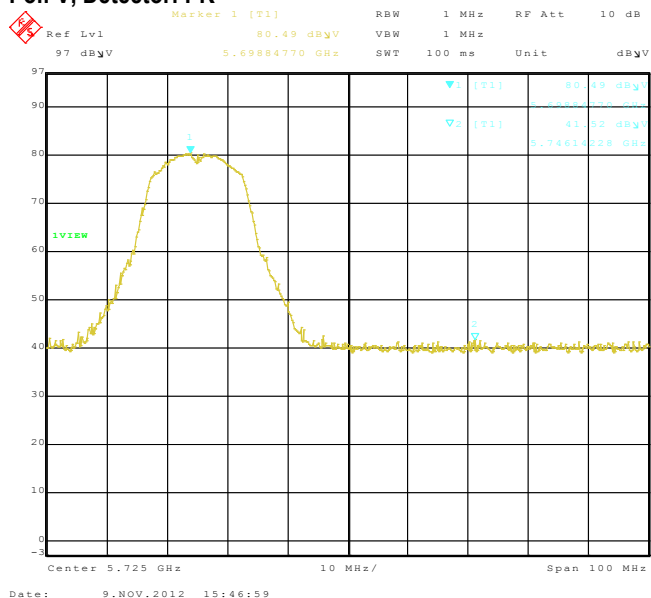


Figure 3-24: Band-Edge Compliance of RF Radiated Emission.
802.11n, Ch 140, 5700 MHz, Centre of Band-Edge: 5725 MHz
Pol: H, Detector: PK

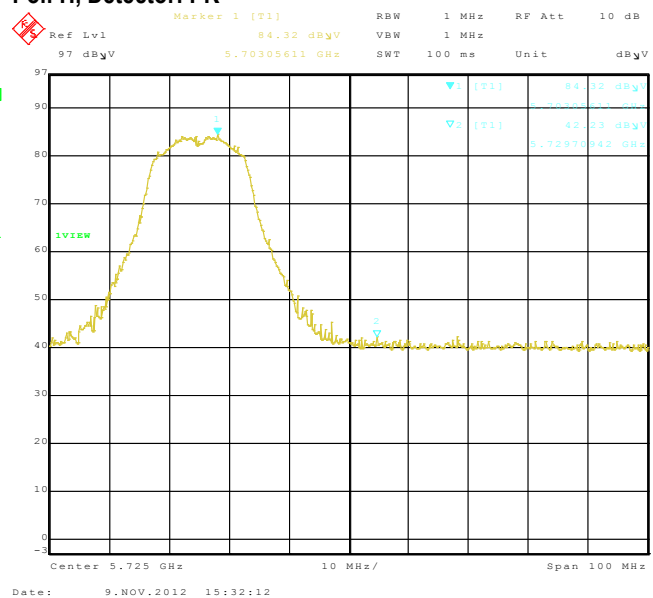

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11n Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-25: Band-Edge Compliance of RF Radiated Emission
 802.11n, Ch 149, 5745 MHz, Centre of Band-Edge: 5725 MHz
 Pol: V, Detector: PK

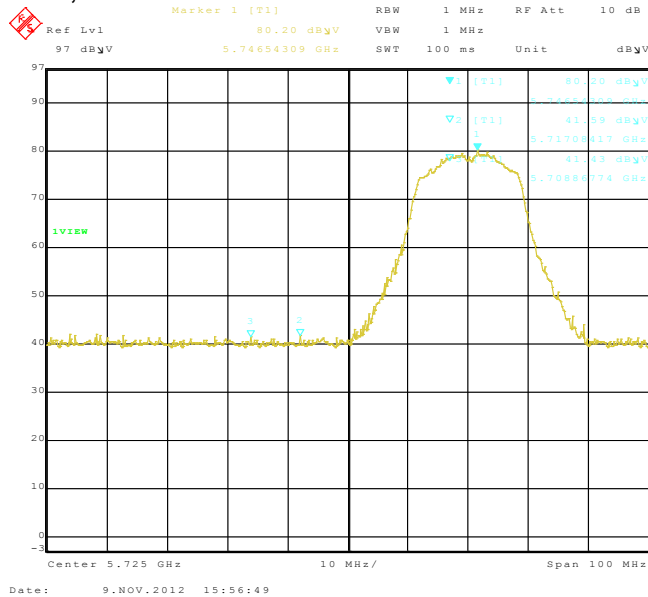


Figure 3-26: Band-Edge Compliance of RF Radiated Emission.
 802.11n, Ch 149, 5745 MHz, Centre of Band-Edge: 5725 MHz
 Pol: H, Detector: PK

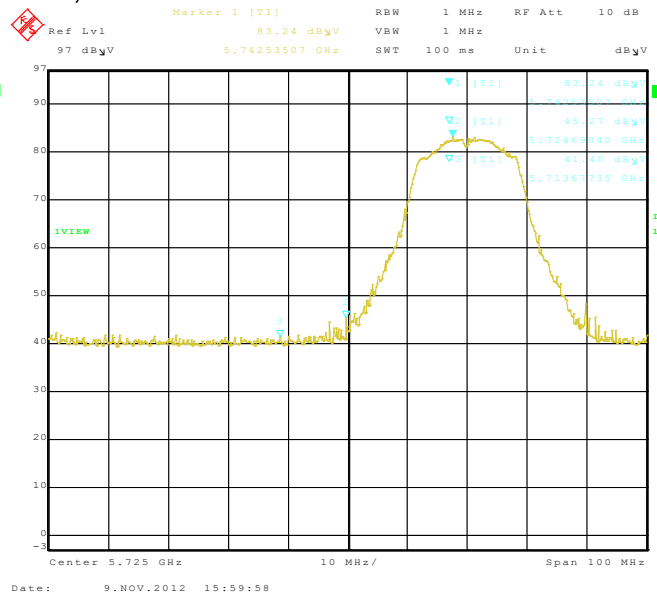


Figure 3-27: Band-Edge Compliance of RF Radiated Emission.
 802.11n, Ch 149, 5745 MHz, Centre of Band-Edge: 5715 MHz
 Pol: V, Detector: PK


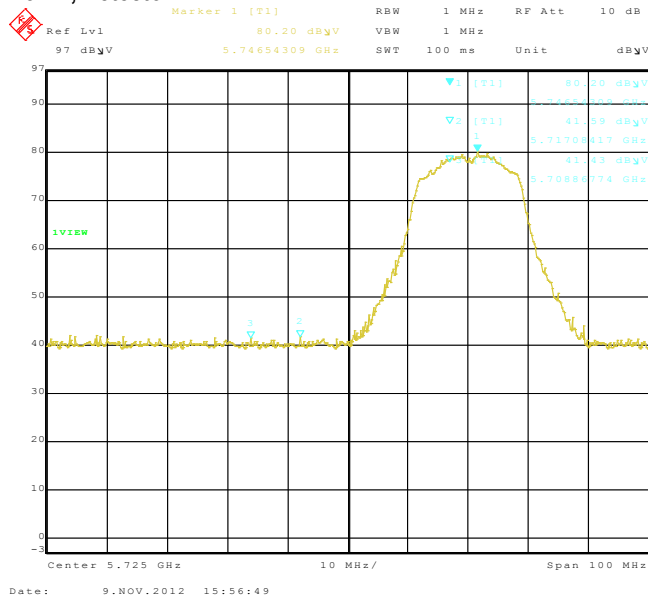


Figure 3-28: Band-Edge Compliance of RF Radiated Emission.
 802.11n, Ch 149, 5745 MHz, Centre of Band-Edge: 5715 MHz
 Pol: H, Detector: PK

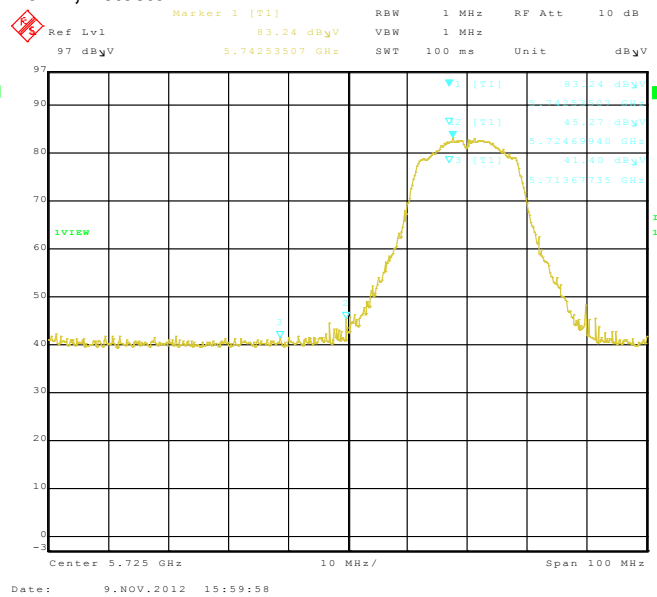

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11n Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-29: Band-Edge Compliance of RF Radiated Emission
 802.11n, Ch 165, 5825 MHz, Centre of Band-Edge: 5805 MHz
 Pol: V, Detector: PK

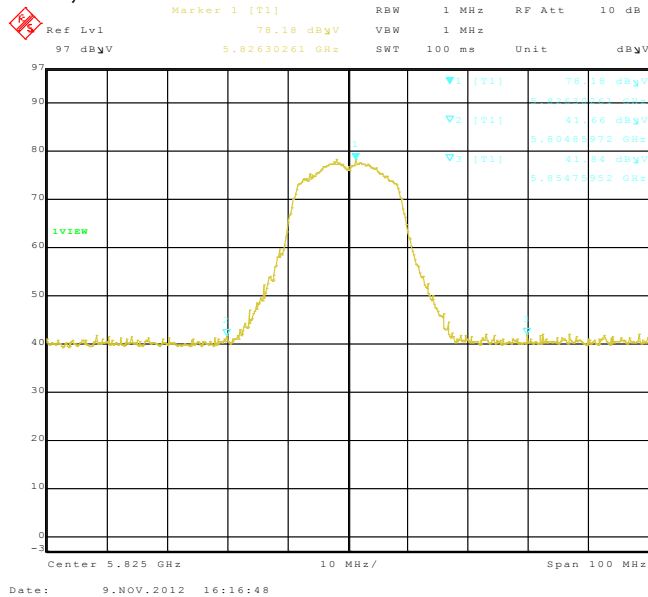


Figure 3-30: Band-Edge Compliance of RF Radiated Emission.
 802.11n, Ch 165, 5825 MHz, Centre of Band-Edge: 5805 MHz
 Pol: H, Detector: PK

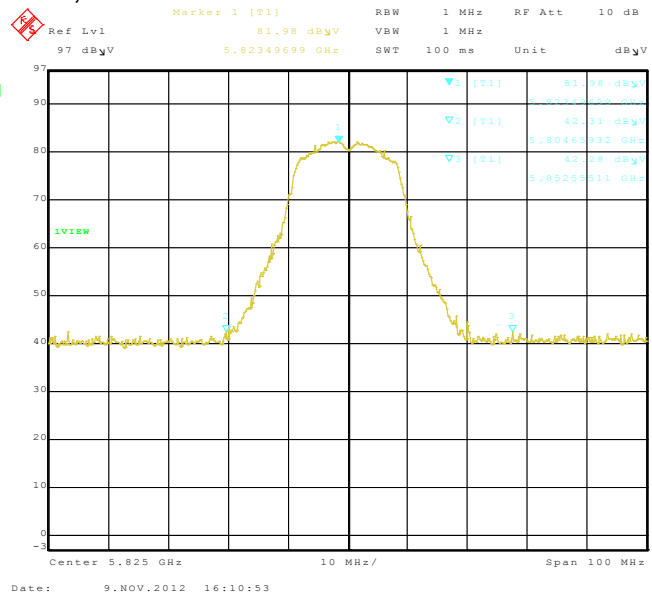


Figure 3-31: Band-Edge Compliance of RF Radiated Emission.
 802.11n, Ch 165, 5825 MHz, Centre of Band-Edge: 5850 MHz
 Pol: V, Detector: PK


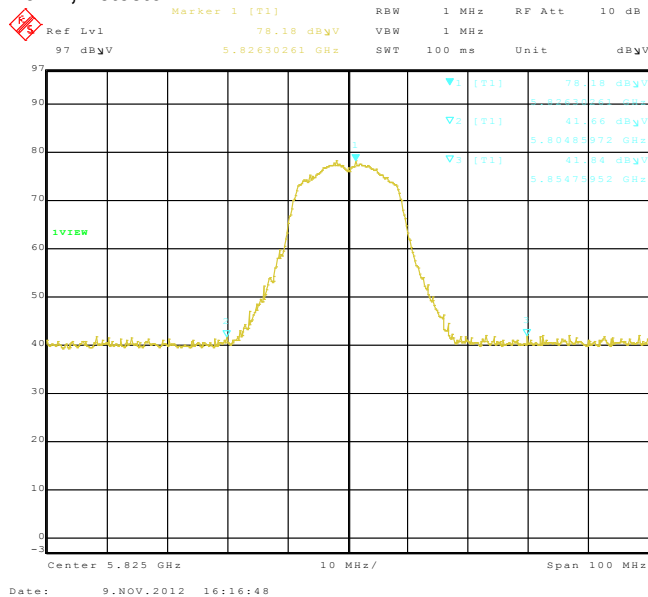




Figure 3-31: Band-Edge Compliance of RF Radiated Emission.
 802.11n, Ch 165, 5825 MHz, Centre of Band-Edge: 5850 MHz
 Pol: H, Detector: PK

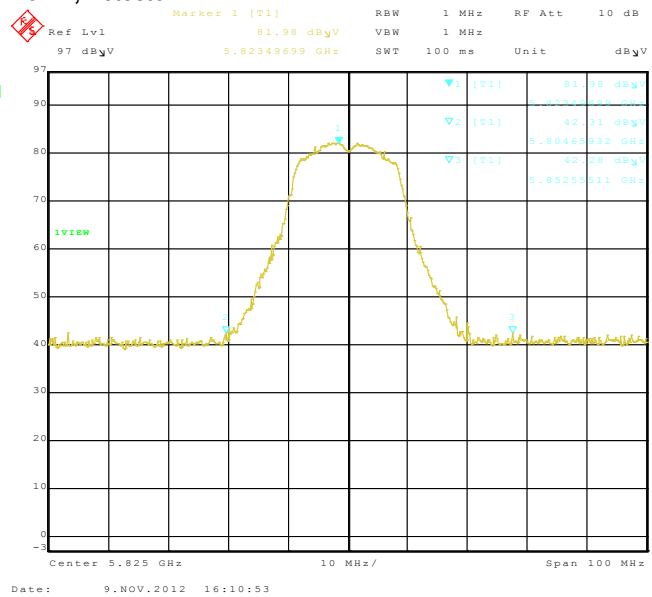

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

APPENDIX 4 – BLUETOOTH AND BLUETOOTH LOW ENERGY CONDUCTED EMISSIONS TEST DATA/PLOTS

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


Bluetooth RF Conducted Emission Test Results

Bluetooth power output from BlackBerry® smartphone was at maximum for all the recorded measurements shown below.

The measurements were performed by Berkin Can.


Date of test: October 1, 2012

Test Setup Diagram

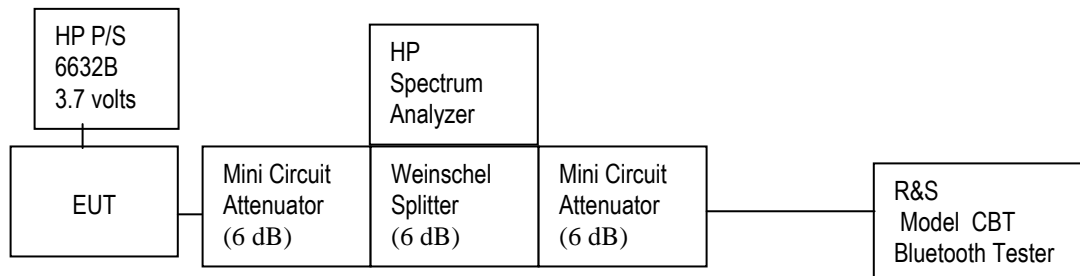

A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

The environmental test conditions were: Temperature: 24.7 °C
Relative Humidity: 29.4 %

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

20 dB Bandwidth

The EUT met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

Bluetooth Channel	Limit (MHz)	Measured Level (MHz)
0	≤1.0	0.918
39	≤1.0	0.916
78	≤1.0	0.916

See figures 4-1 to 4-3 for the plots of the 20 dB bandwidth measurements.

Figure 4-1: 20 dB Bandwidth
Single freq., Static PBRs, DH5

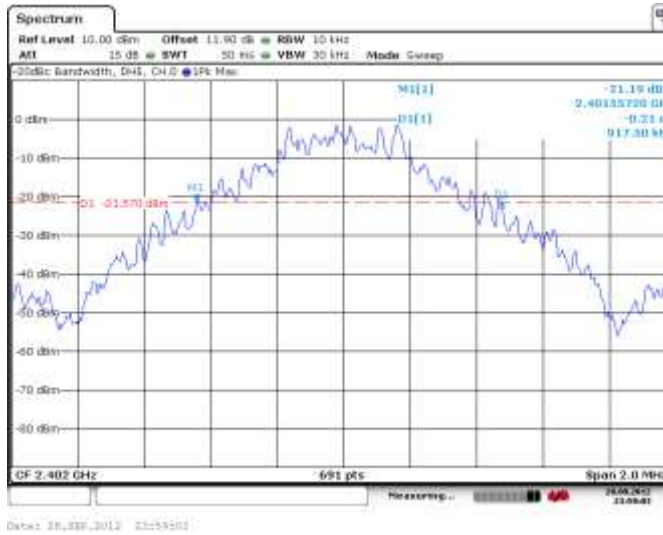



Figure 4-2: 20 dB Bandwidth
Single freq., Static PBRs, DH5



	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd


**Figure 4-3: 20 dB Bandwidth
Single freq., Static PBRs, DH5**



Using Pattern type “Static PBRs” and packet type “2-DH5” during the measurements.


Bluetooth Channel	Limit (MHz)	Measured Level (MHz)
0	≤1.5	1.314
39	≤1.5	1.312
78	≤1.5	1.268

See figures 4-4 to 4-6 for the plots of the 20 dB bandwidth measurements.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-4: 20 dB Bandwidth
Single freq., Static PBRs, 2-DH5**

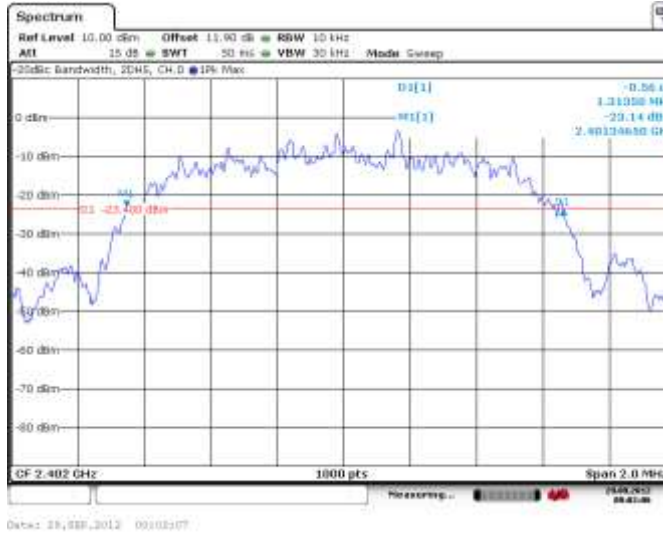


**Figure 4-5: 20 dB Bandwidth
Single freq., Static PBRs, 2-DH5**



**Figure 4-6: 20 dB Bandwidth
Single freq., Static PBRs, 2-DH5**



	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Using Pattern type “Static PBRs” and packet type “3-DH5” during the measurements.

Bluetooth Channel	Limit (MHz)	Measured Level (MHz)
0	≤1.5	1.314
39	≤1.5	1.292
78	≤1.5	1.318

See figures 4-7 to 4-9 for the plots of the 20 dB bandwidth measurements.

Figure 4-7: 20 dB Bandwidth
Single freq., Static PBRs, 3-DH5

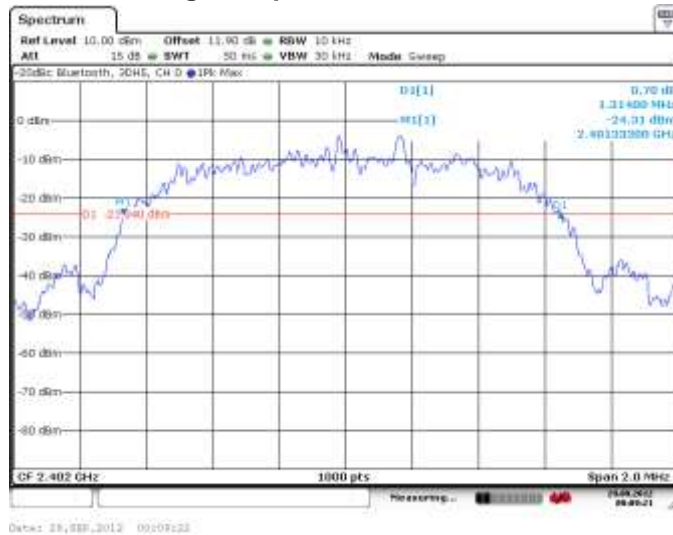


Figure 4-8: 20 dB Bandwidth
Single freq., Static PBRs, 3-DH5


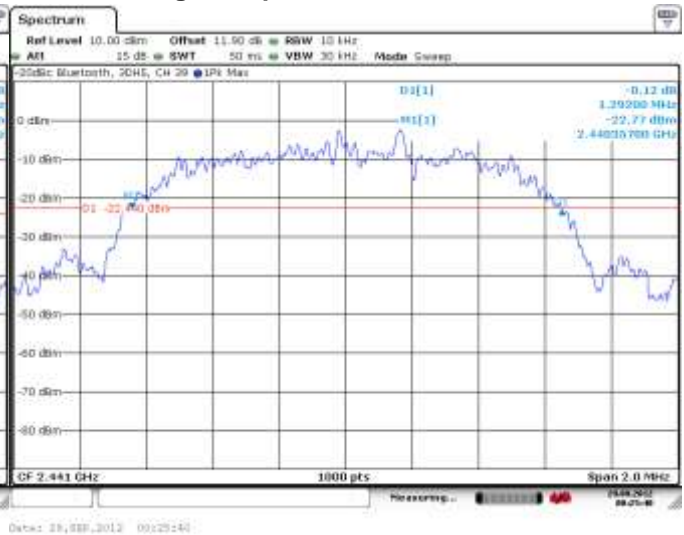


Figure 4-9: 20 dB Bandwidth
Single freq., Static PBRs, 3-DH5


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

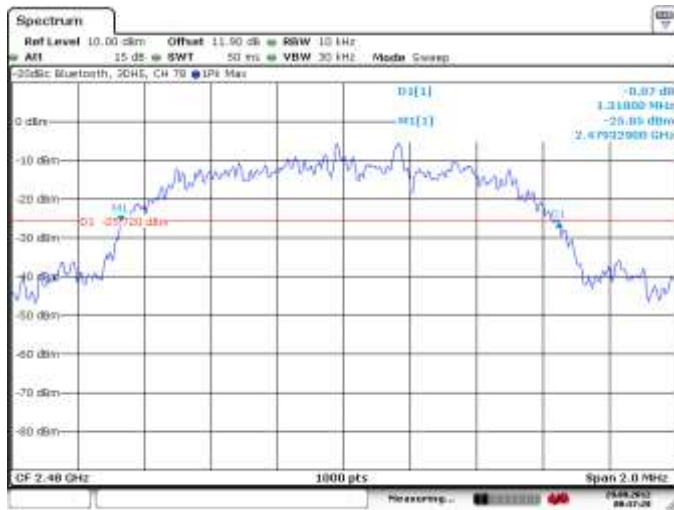

Date: 28, SEP, 2012 09:37:28

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Carrier Frequency Separation


The EUT met the requirements of the Carrier Frequency Separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. Bluetooth was operating in frequency hopping (Euro/US) mode.


Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

Bluetooth Channels	Limit (MHz)	Measured Level (MHz)
38 to 39	≥ 0.025 or 20 dB bandwidth	1.000

See figure 4-10 for the plot of the Carrier Frequency Separation measurement.

Figure 4-10: Carrier Frequency Separation, Freq. Hopping, Static PBRs, DH5, Channels 38 to 39

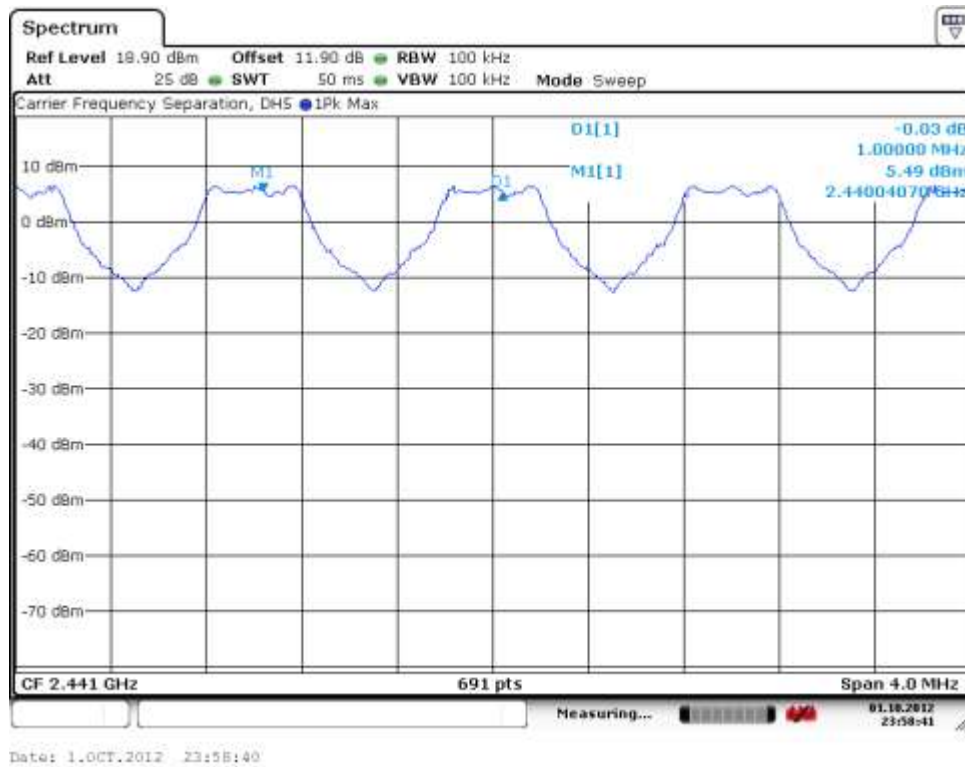

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


Bluetooth RF Conducted Emission Test Results cont'd


Using Pattern type “Static PBRs” and packet type “2-DH5” during the measurements.

Bluetooth Channels	Limit (MHz)	Measured Level (MHz)
38 to 39	≥ 0.025 or 20 dB bandwidth	1.000

See figure 4-11 for the plot of the Carrier Frequency Separation measurement.

Figure 4-11: Carrier Frequency Separation, Freq. Hopping, Static PBRs, 2-DH5, Channels 38 to 39

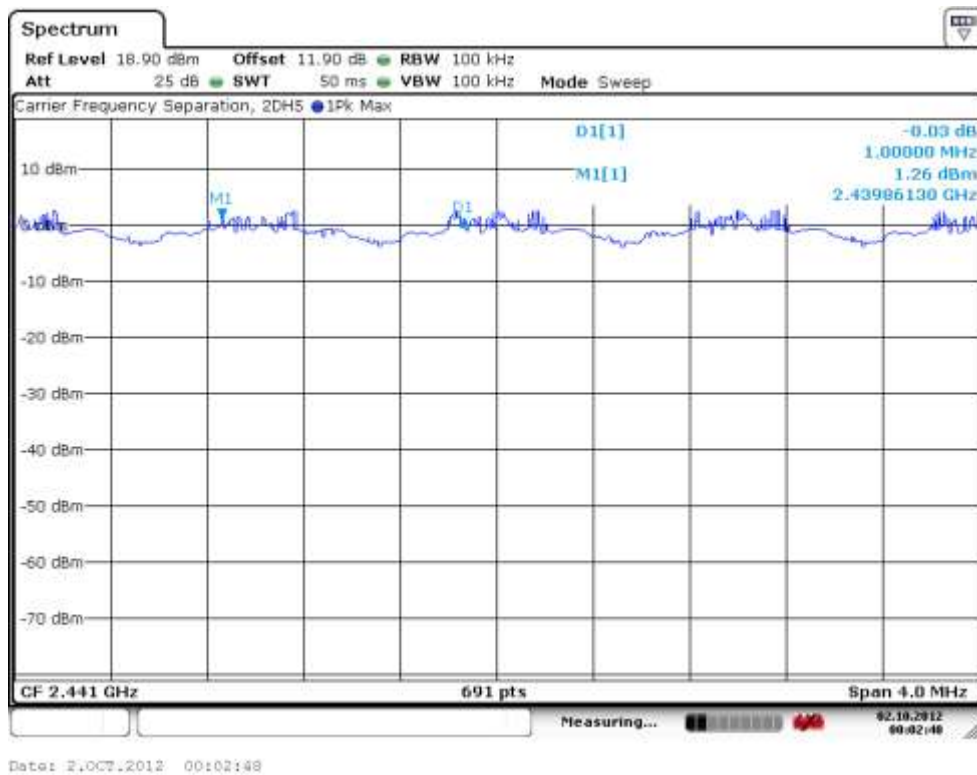

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


Bluetooth RF Conducted Emission Test Results cont'd

Using Pattern type “Static PBRs” and packet type “3-DH5” during the measurements.


Bluetooth Channels	Limit (MHz)	Measured Level (MHz)
38 to 39	≥ 0.025 or 20 dB bandwidth	1.000

See figure 4-12 for the plot of the Carrier Frequency Separation measurement.

Figure 4-12: Carrier Frequency Separation, Freq. Hopping, Static PBRs, 3-DH5, Channels 38 to 39

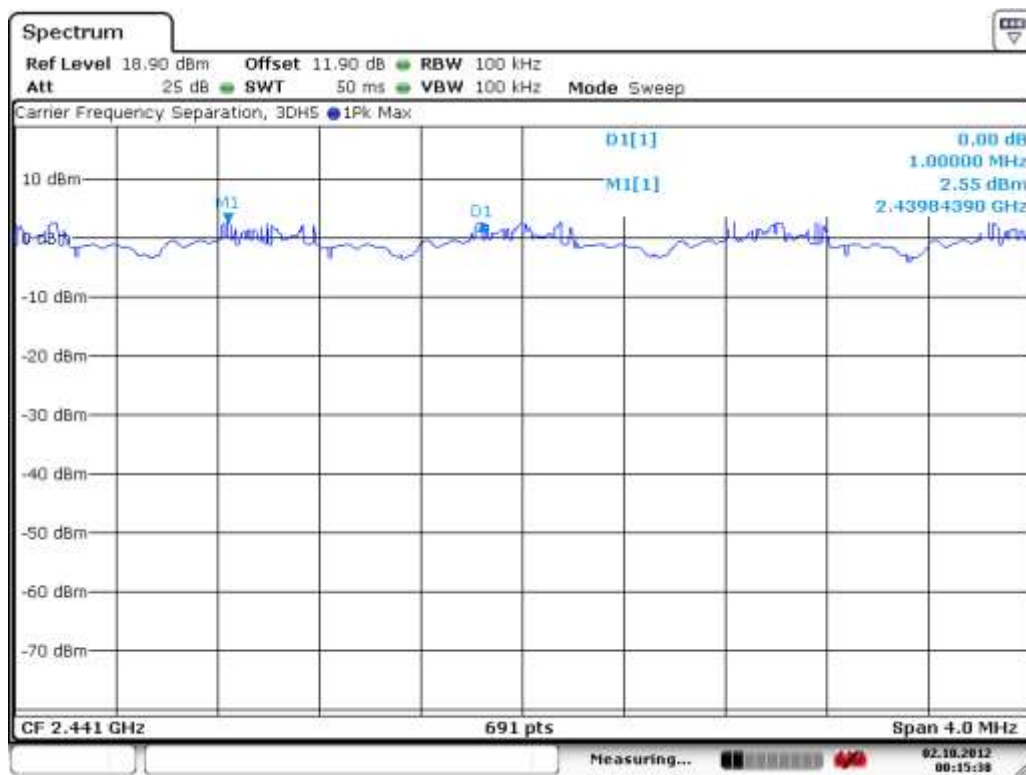

Date: 2.OCT.2012 00:15:37

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

Bluetooth RF Conducted Emission Test Results cont'd

Number of Hopping Frequencies

The EUT met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. Bluetooth was operating in frequency hopping (Euro/US) mode.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

Limit (CH)	Number of Hopping Frequencies (CH)
≥75	79

See figures 4-13 to 4-16 for the plots of the number of hopping frequencies.

Figure 4-13: Number of Hopping Frequencies Static PBRs, DH5






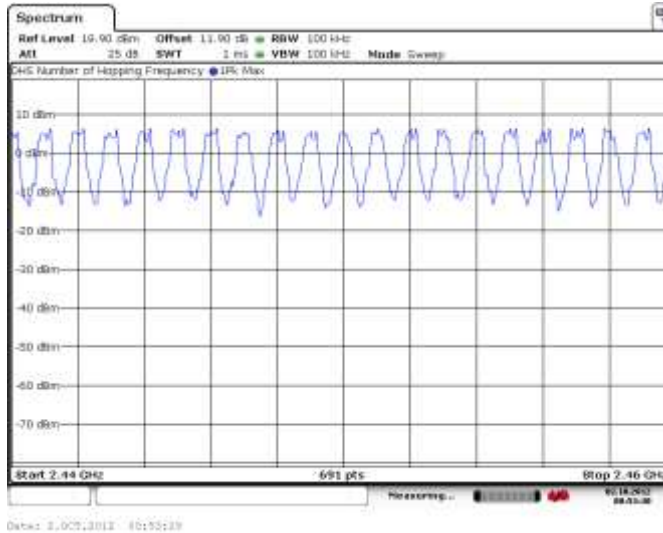
Figure 4-14: Number of Hopping Frequencies Static PBRs, DH5




	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012

Bluetooth RF Conducted Emission Test Results cont'd

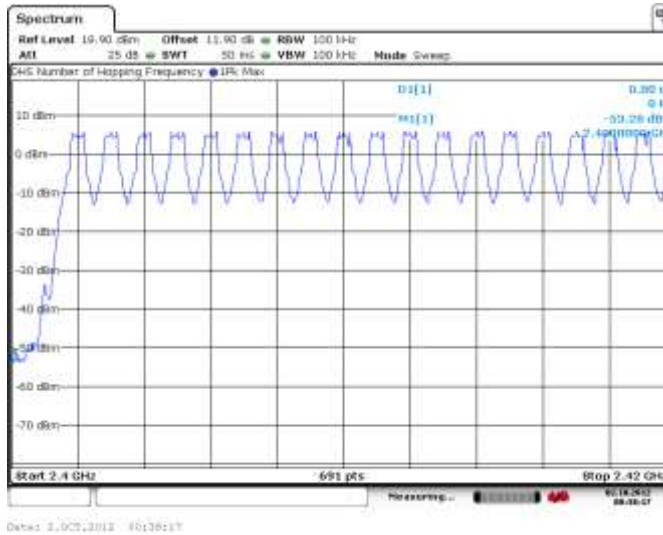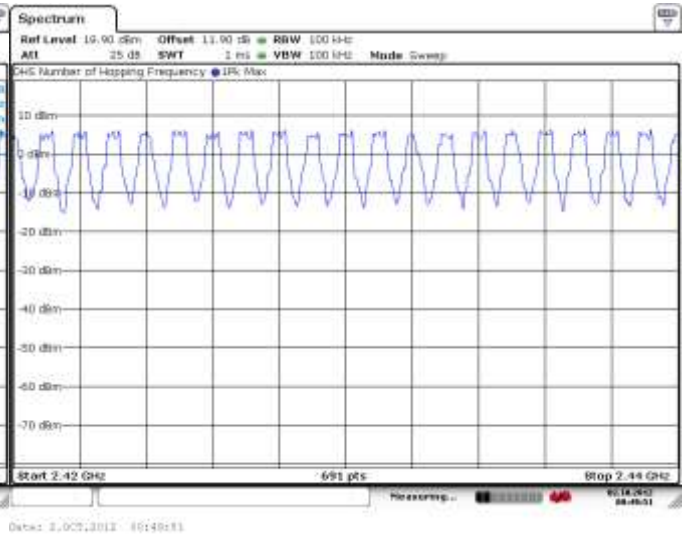**Figure 4-15: Number of Hopping Frequencies
Static PBRs, DH5**



**Figure 4-16: Number of Hopping Frequencies
Static PBRs, DH5**

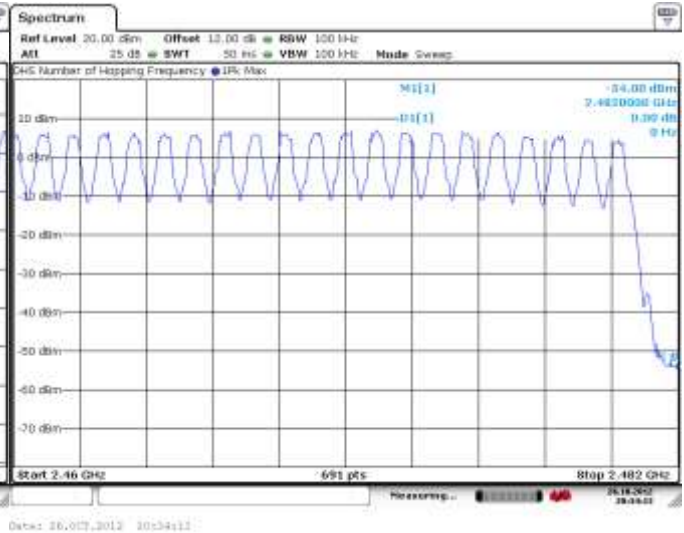


Time of Occupancy (Dwell Time)

The EUT met the requirements of the time of occupancy (dwell time) as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in packet types DH1, DH3 and DH5. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements. The frequency hopping is 1600 hops per second for a dwell time of 625 µsec for 79 channels.

A DH1 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 800 hops per second with 79 channels which is 10.127 times per second. As per 15.247(a) (iii) “The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed”. Therefore for 31.6 seconds (79x0.4) there are 320.0 times of appearance.

A DH3 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 400 hops per second with 79 channels which is 5.06 times per second. Therefore for 31.6 seconds there are 159.9 times of appearance.

A DH5 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 266.7 hops per second with 79 channels which is 3.38 times per second. Therefore for 31.6 seconds there are 106.8 times of appearance.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Bluetooth Channel	Mode	Tx Time (ms)	Dwell Time/31.6 sec. (msec.)	Limit (msec.)	Margin (msec.)
0	DH1	0.3970	$0.397 \times 320.0 = 127.04$	400	272.96
39	DH1	0.3950	$0.395 \times 320.0 = 126.40$	400	273.60
78	DH1	0.3920	$0.392 \times 320.0 = 125.44$	400	274.56
0	DH3	0.7110	$0.711 \times 320.0 = 227.52$	400	286.31
39	DH3	0.7890	$0.789 \times 320.0 = 252.48$	400	273.84
78	DH3	0.6850	$0.685 \times 320.0 = 219.20$	400	290.47
0	DH5	2.9180	$2.918 \times 320.0 = 933.76$	400	88.36
39	DH5	2.9180	$2.918 \times 320.0 = 933.76$	400	88.36
78	DH5	2.9180	$2.918 \times 320.0 = 933.76$	400	88.36

See figures 4-17 to 4-25 for the plots of the dwell time.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-17: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH1


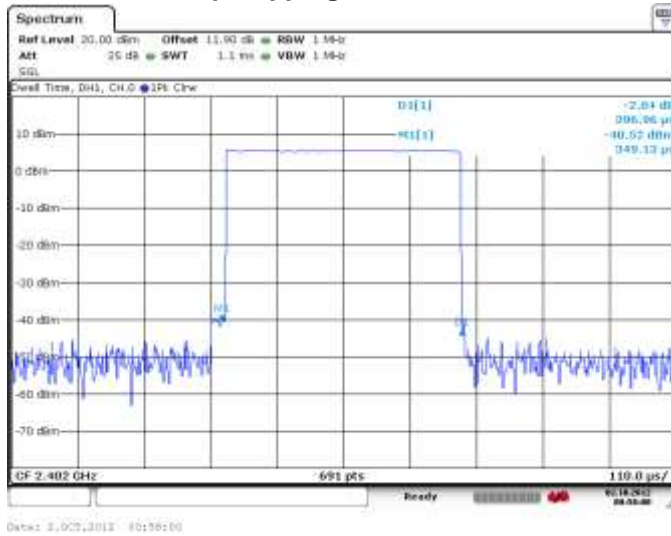



Figure 4-18: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH1

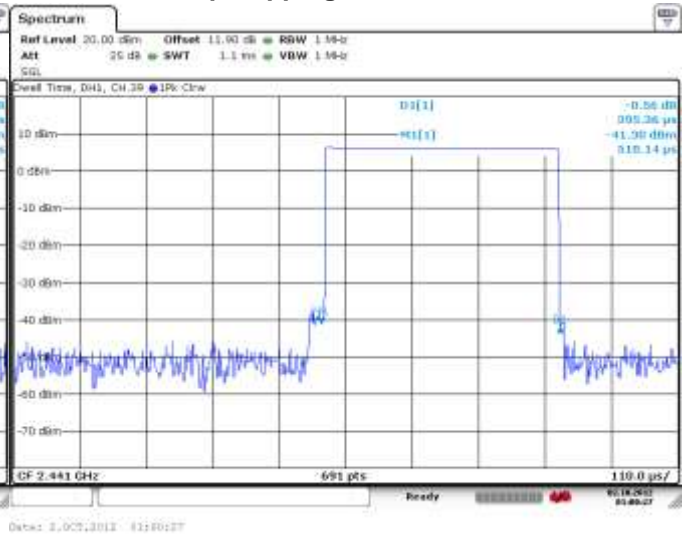

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-19: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH1

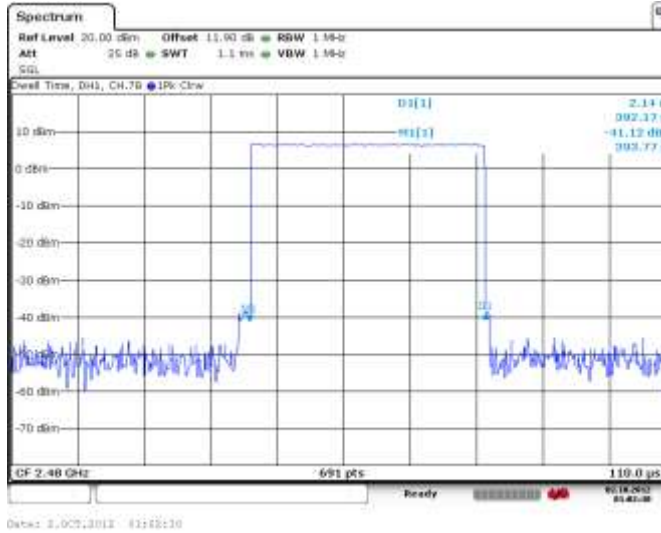


Figure 4-20: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH3

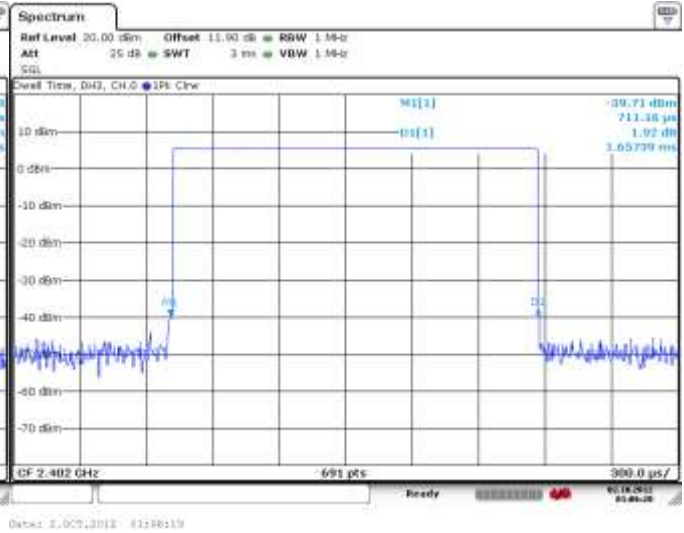


Figure 4-21: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH3


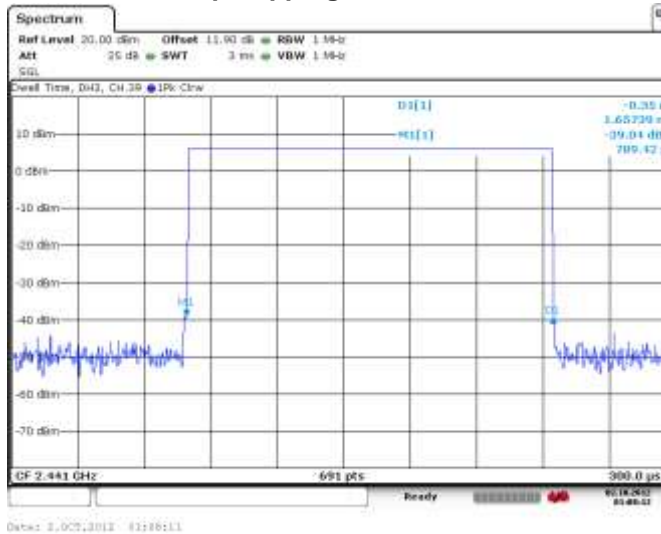



Figure 4-22: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH3

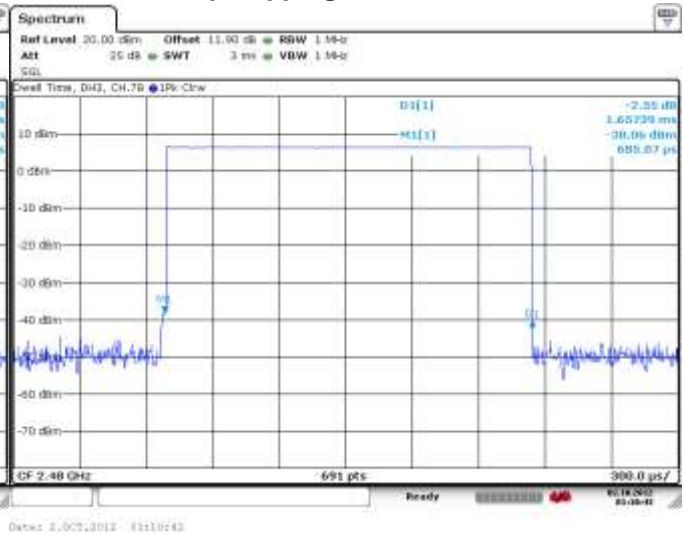

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-23: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH5

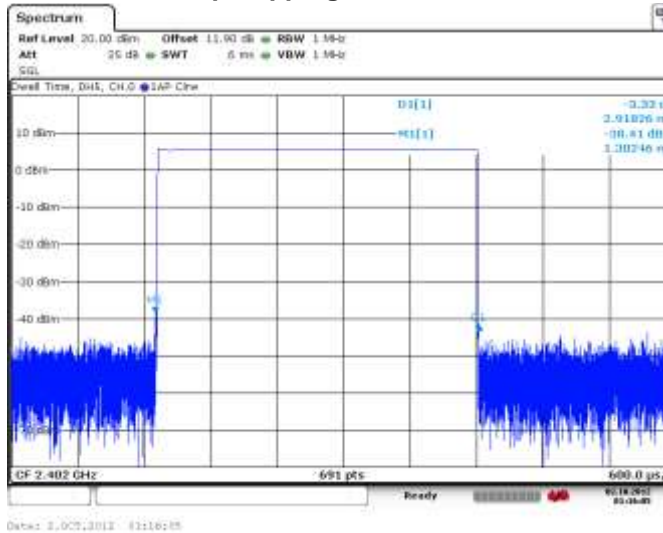


Figure 4-24: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH5


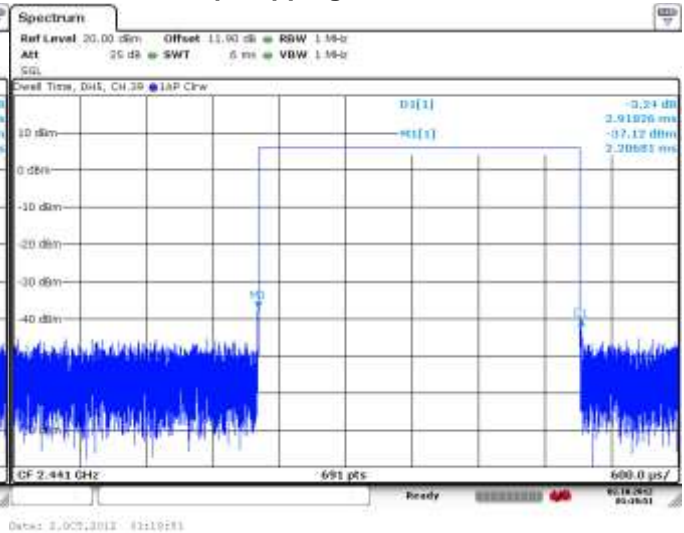



Figure 4-25: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH5

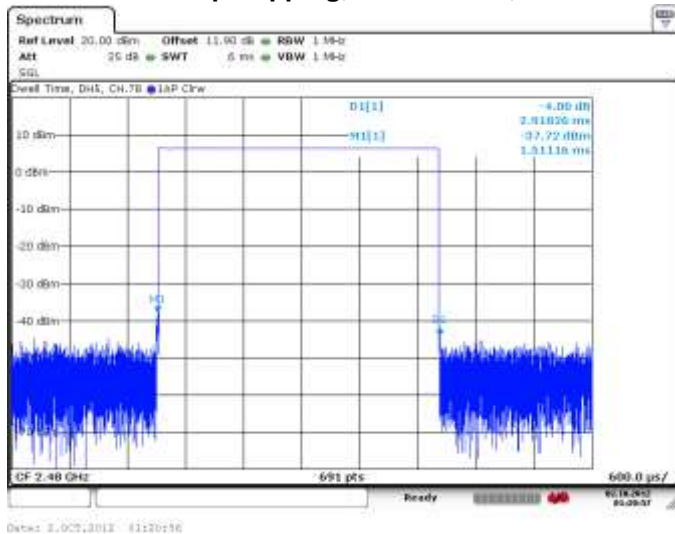

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

Bluetooth RF Conducted Emission Test Results cont'd

Maximum Peak Conducted Output Power


The EUT met the requirements of the maximum peak conducted output power of class 1 as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode during the measurements. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the coaxial cable loss and attenuators in the test circuit.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

Bluetooth Channel	Measured Level (dBm)	Measured Level (W)	Class 1 Limit (dBm)
0	5.95	0.00394	0.0 to 20.0
39	7.69	0.00587	0.0 to 20.0
78	4.82	0.00303	0.0 to 20.0


See figures 4-26 to 4-28 for the plots of the maximum peak conducted output power.

Figure 4-26: Max. Peak Conducted Output Power Single Freq., Static PBRs, DH5

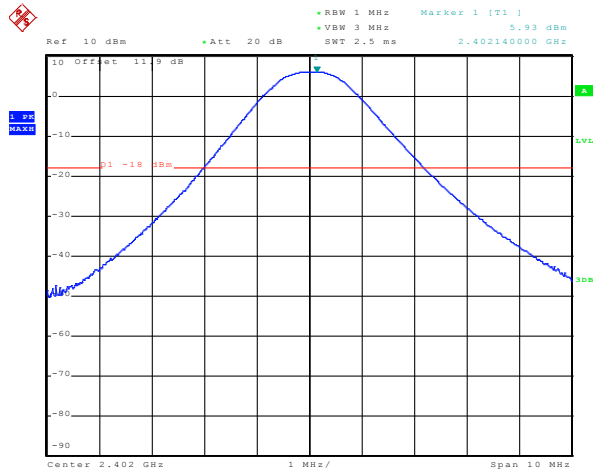


Date: 2.OCT.2012 17:06:02

Figure 4-27: Max. Peak Conducted Output Power Single Freq., Static PBRs, DH5

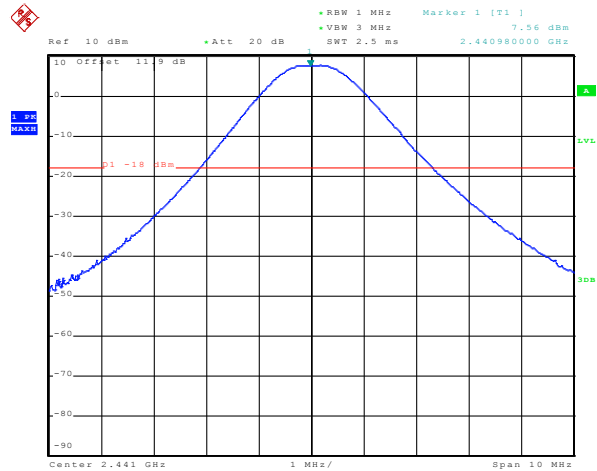


Date: 2.OCT.2012 17:08:33

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-28: Max. Peak Conducted Output Power
Single Freq., Static PBRs, DH5**

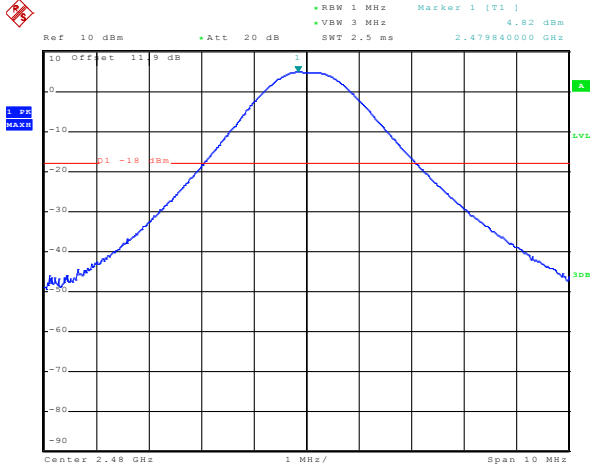

Date: 2.OCT.2012 17:09:47

Using Pattern type “Static PBRs” and packet type “2-DH5” during the measurements.

Bluetooth Channel	Measured Level (dBm)	Measured Level (W)	Class 1 Limit (dBm)
0	5.44	0.00350	0.0 to 20.0
39	7.16	0.00520	0.0 to 20.0
78	4.19	0.00262	0.0 to 20.0

See figures 4-29 to 4-31 for the plots of the maximum peak conducted output power.


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW


Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-29: Max. Peak Conducted Output Power
 Single Freq., Static PBRS, 2-DH5**

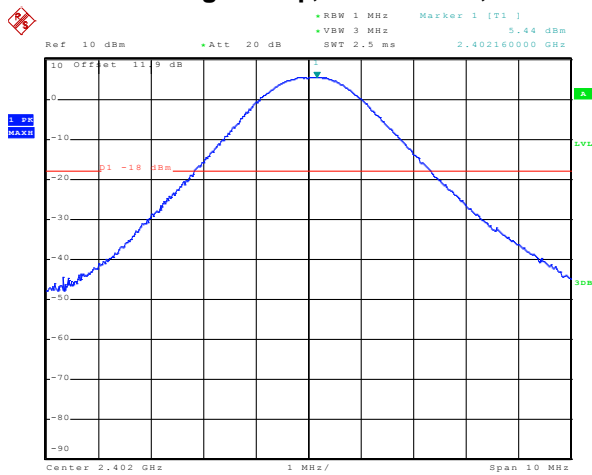


Date: 2.OCT.2012 17:15:43

**Figure 4-30: Max. Peak Conducted Output Power
 Single Freq., Static PBRS, 2-DH5**

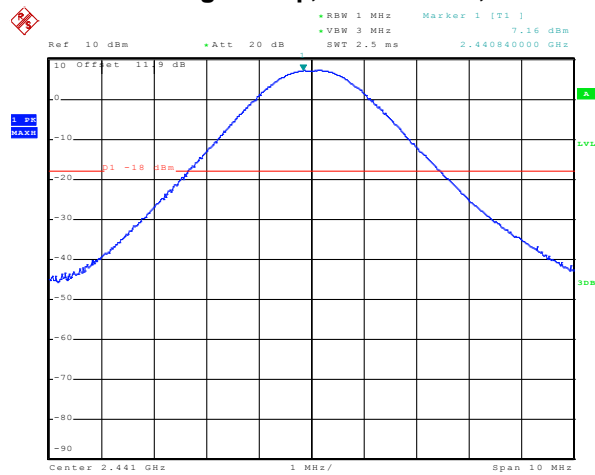


Date: 2.OCT.2012 17:16:34

**Figure 4-31: Max. Peak Conducted Output Power
 Single Freq., Static PBRS, 2-DH5**

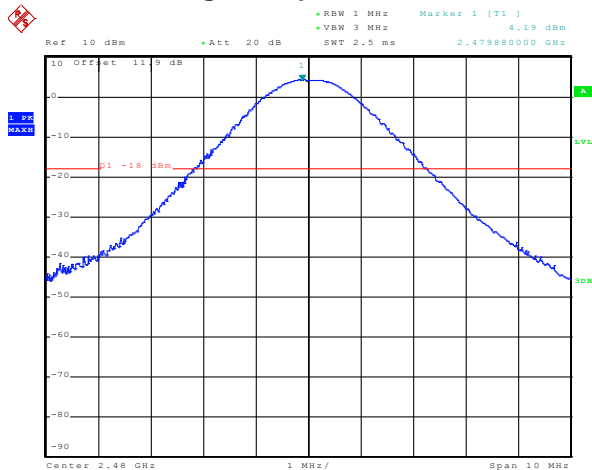

Date: 2.OCT.2012 17:17:16

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	


Bluetooth RF Conducted Emission Test Results cont'd

Using Pattern type "Static PBRs" and packet type "3-DH5" during the measurements.

Bluetooth Channel	Measured Level (dBm)	Measured Level (W)	Class 1 Limit (dBm)
0	6.03	0.00401	0.0 to 20.0
39	7.71	0.00590	0.0 to 20.0
78	4.91	0.00310	0.0 to 20.0


See figures 4-32 to 4-34 for the plots of the maximum peak conducted output power.

Figure 4-32: Max. Peak Conducted Output Power Single Freq., Static PBRs, 3-DH5

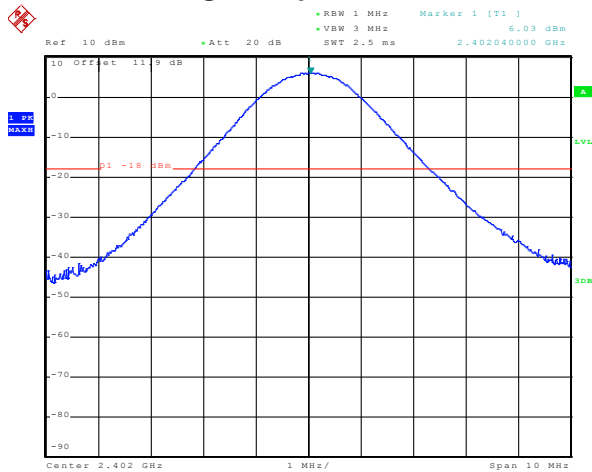


Date: 2.OCT.2012 17:11:30

Figure 4-33: Max. Peak Conducted Output Power Single Freq., Static PBRs, 3-DH5

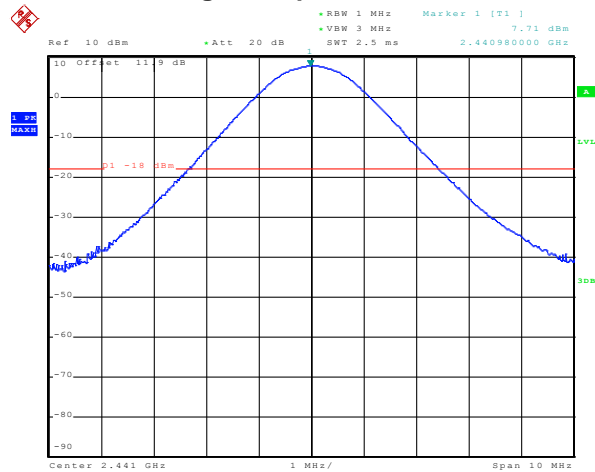


Date: 2.OCT.2012 17:12:24


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-34: Max. Peak Conducted Output Power
Single Freq., Static PBRs, 3-DH5**

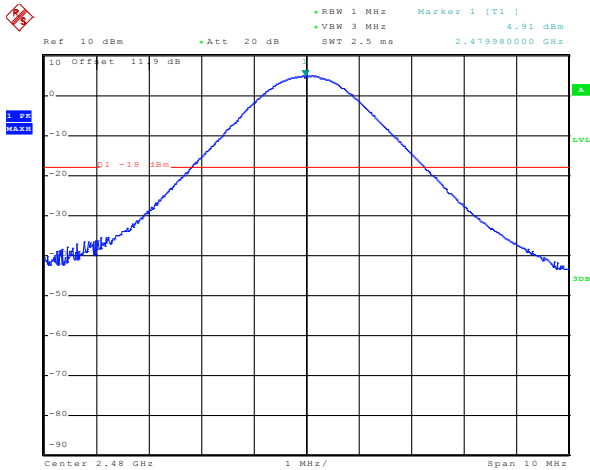

Date: 2.OCT.2012 17:13:28

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Low channel (0) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

Bluetooth Channel	Operating Mode	Measured Level (dBc)	Limit (dBc)	Margin (dB)
0	Single Frequency	-39.07	-20	-19.07
78	Single Frequency	-38.86	-20	-18.86
0	Hopping	-40.06	-20	-20.06
78	Hopping	-38.85	-20	-18.85

See figures 4-35 to 4-38 for the plots of the band edge compliance measurements.

Figure 4-35: Band Edge Compliance
Single Freq., Static PBRs, DH5


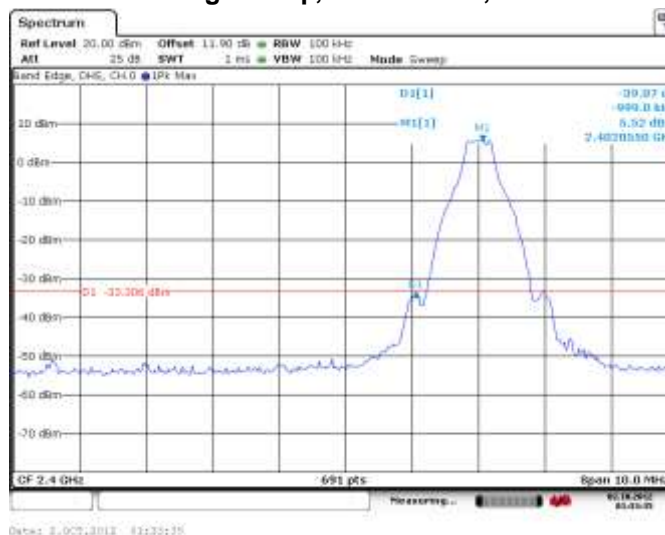



Figure 4-36: Band Edge Compliance
Single Freq., Static PBRs, DH5

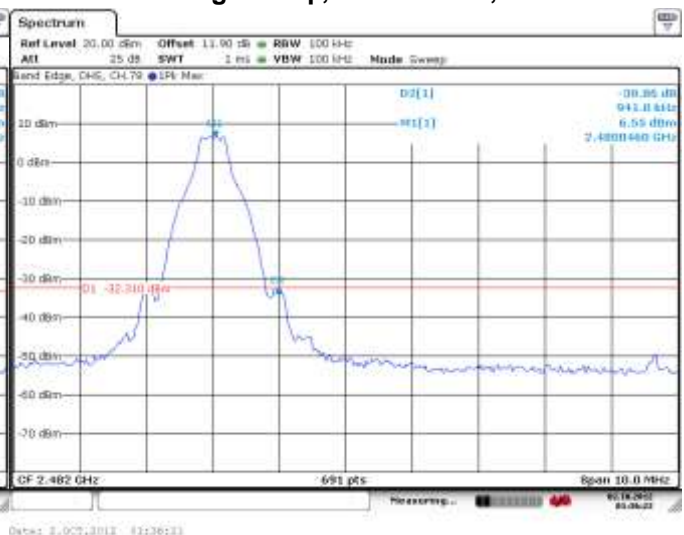


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-37: Band Edge Compliance
Freq. Hopping, Static PBRs, DH5


Figure 4-38: Band Edge Compliance
Freq. Hopping, Static PBRs, DH5

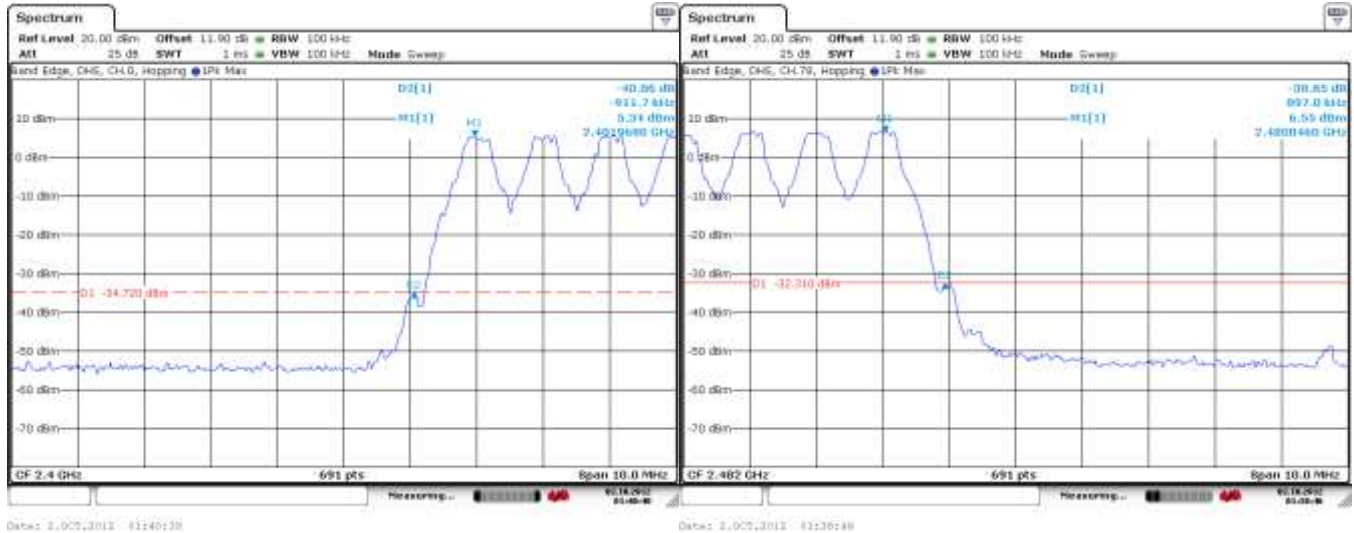

Using pattern type “Static PBRs” and packet type “2-DH5” during the measurements.

Bluetooth Channel	Operating Mode	Measured Level (dBc)	Limit (dBc)	Margin (dB)
0	Single Frequency	-35	-20	-15.00
78	Single Frequency	-34.98	-20	-14.98
0	Hopping	-30.97	-20	-10.97
78	Hopping	-37.36	-20	-17.36

See figures 4-39 to 4-42 for the plots of the band edge compliance measurements.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-39: Band Edge Compliance
Single Freq., Static PBRs, 2-DH5

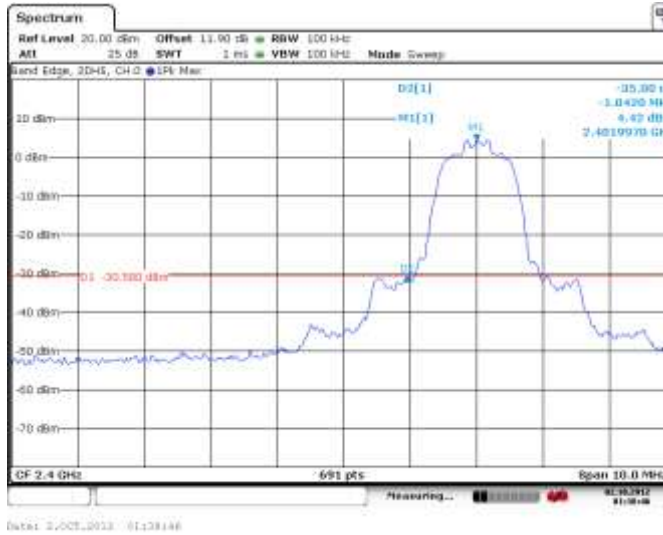


Figure 4-40: Band Edge Compliance
Single Freq., Static PBRs, 2-DH5

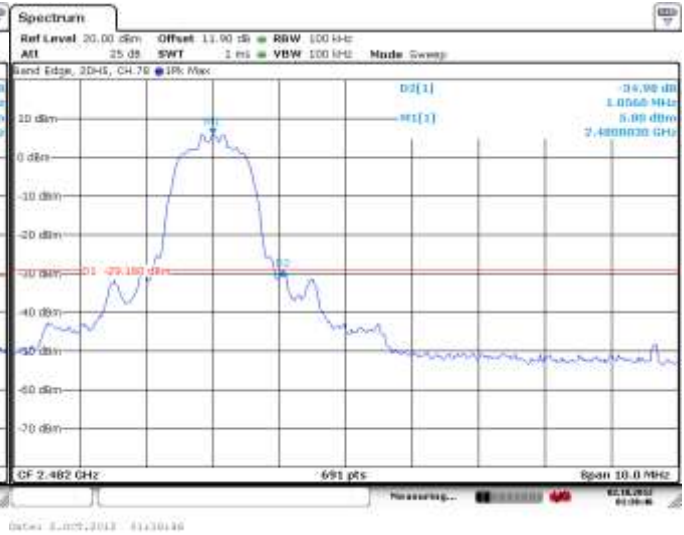


Figure 4-41: Band Edge Compliance
Freq. Hopping, Static PBRs, 2-DH5


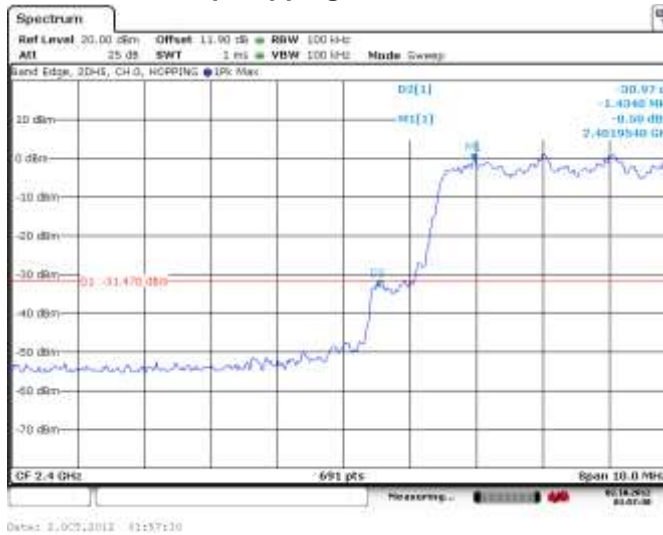



Figure 4-42: Band Edge Compliance
Freq. Hopping, Static PBRs, 2-DH5

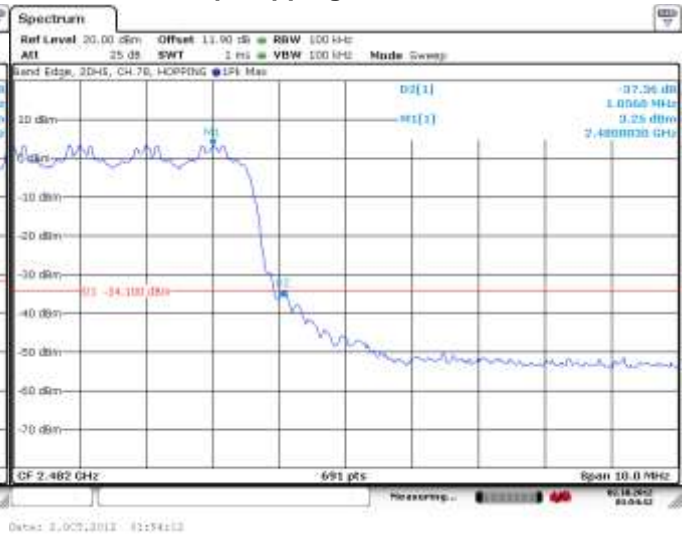

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012


Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type "Static PBRs" and packet type "3-DH5" during the measurements.

Bluetooth Channel	Operating Mode	Measured Level (dBc)	Limit (dBc)	Margin (dB)
0	Single Frequency	-31.92	-20	-11.92
78	Single Frequency	-27.19	-20	-7.19
0	Hopping	-35.92	-20	-15.92
78	Hopping	-24.66	-20	-4.66


See figures 4-43 to 4-46 for the plots of the band edge compliance measurements.

**Figure 4-43: Band Edge Compliance
Single Freq., Static PBRs, 3-DH5**

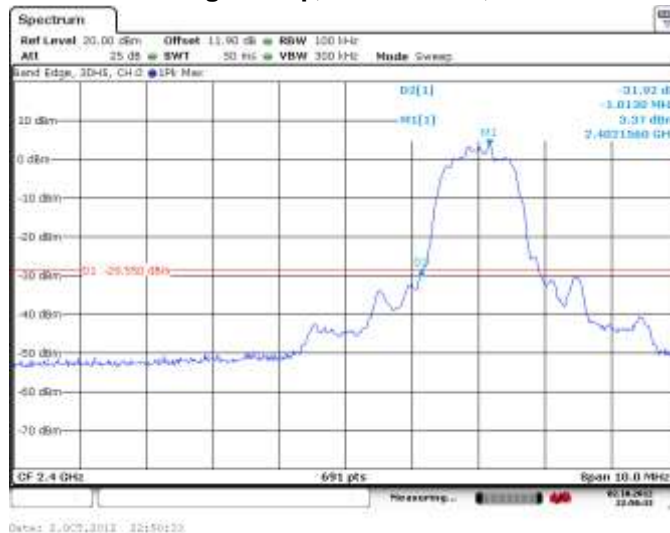

**Figure 4-44: Band Edge Compliance
Single Freq., Static PBRs, 3-DH5**



	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-45: Band Edge Compliance
Freq. Hopping, Static PBRS, 3-DH5


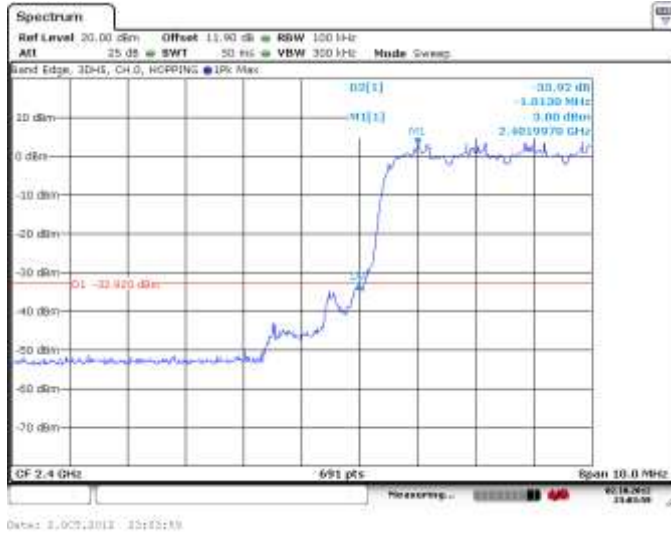



Figure 4-46: Band Edge Compliance
Freq. Hopping, Static PBRS, 3-DH5

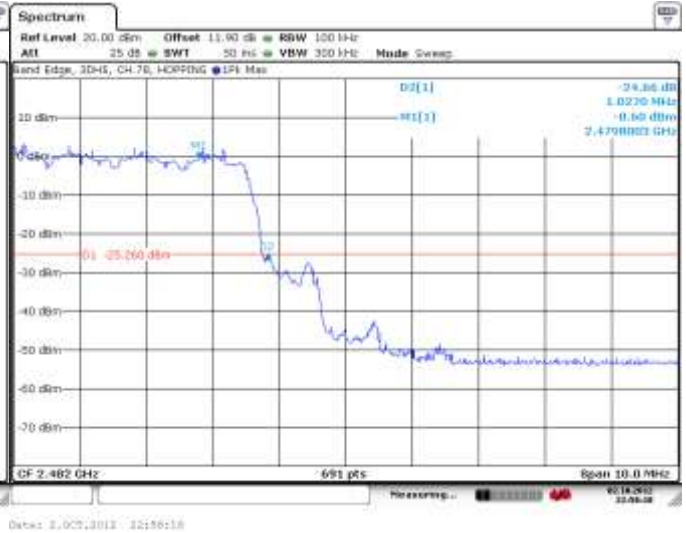

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Low channel (0), mid channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

Using pattern type “Static PBRs” and packet type “DH5” during the measurements.

Bluetooth Channel	Channel Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from carrier (dBc)	Limit (dBc)
0.00	5.95	-40.63	-46.58	-20.00
39.00	7.69	-41.63	-49.32	-20.00
78.00	4.82	-42.06	-46.88	-20.00
Hopping mode	4.82	-41.93	-46.75	-20.00

See figures 4-47 to 4-50 for the plots of the spurious RF conducted emissions.


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-47: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, DH5,**

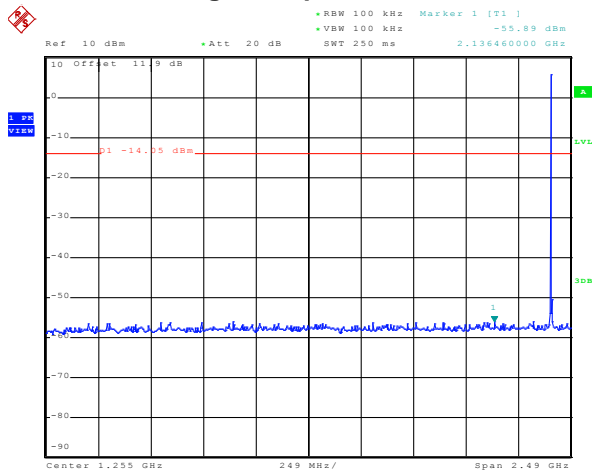


Date: 3.OCT.2012 16:57:10

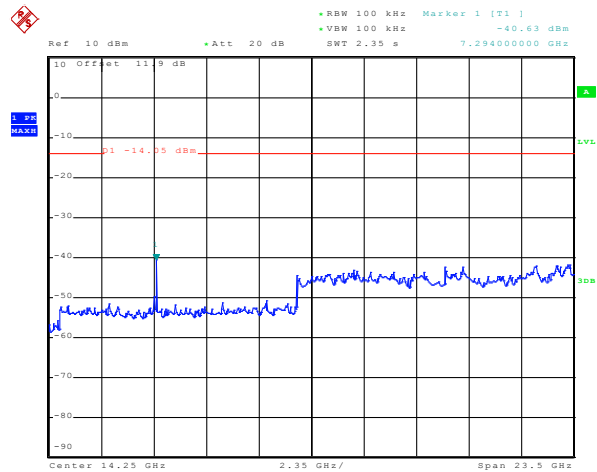


Date: 3.OCT.2012 16:59:54

**Figure 4-48: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, DH5**

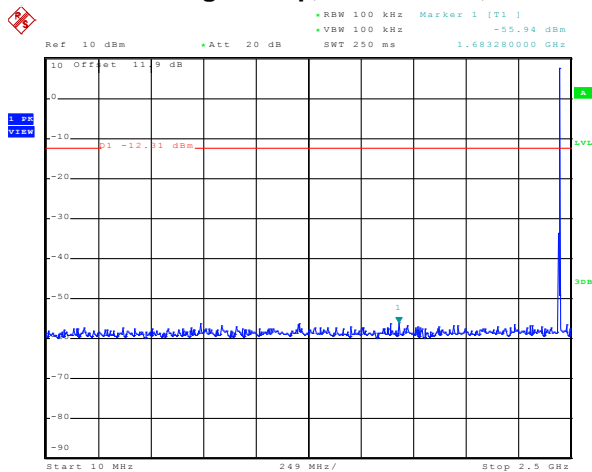

Date: 3.OCT.2012 17:06:48

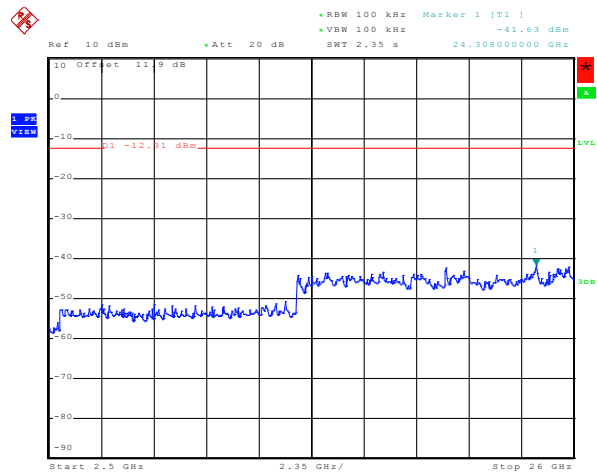

Date: 3.OCT.2012 17:02:16


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-49: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, DH5**

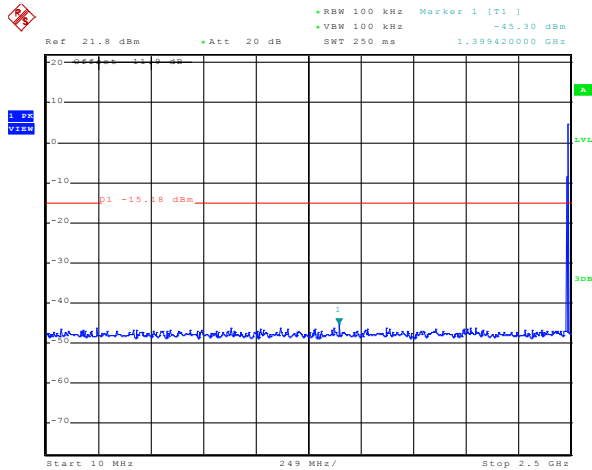


Date: 3.OCT.2012 17:25:11

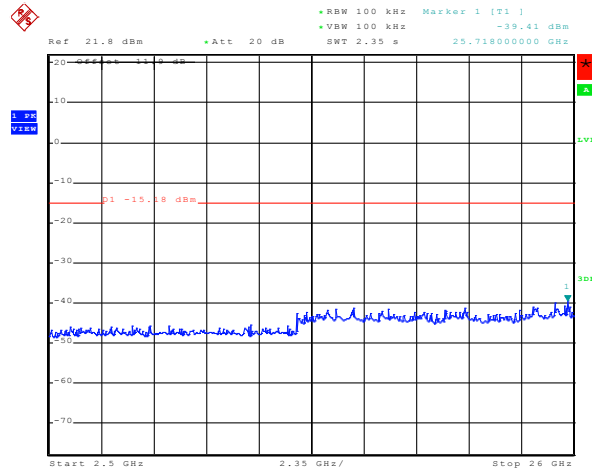


Date: 3.OCT.2012 17:25:47


**Figure 4-50: Spurious RF Conducted Emissions
 Freq. Hopping, Static PBRs, DH5**

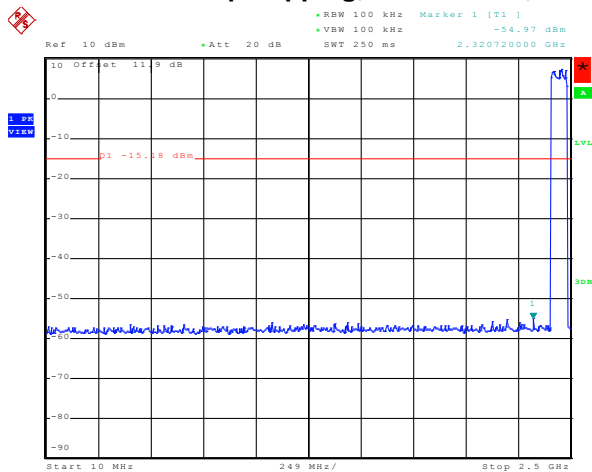

Date: 3.OCT.2012 17:17:07

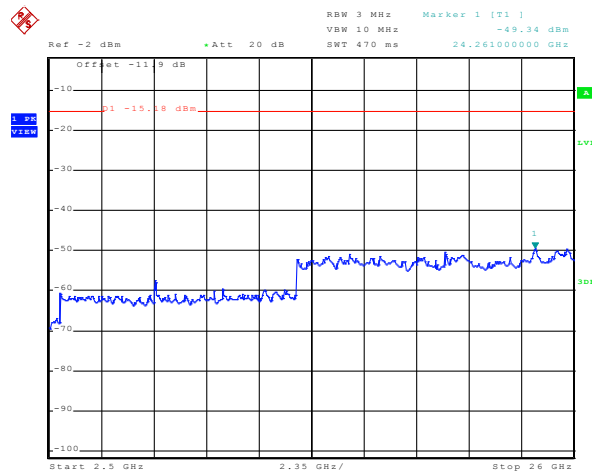

Date: 3.OCT.2012 17:19:42

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type "Static PBRS" and packet type "2-DH5" during the measurements.

Bluetooth Channel	Channel Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from carrier (dBc)	Limit (dBc)
0.00	6.03	-40.53	-46.56	-20.00
39.00	7.71	-41.37	-49.08	-20.00
78.00	4.91	-41.24	-46.15	-20.00
Hopping mode	4.91	-40.87	-45.78	-20.00

See figures 4-51 to 4-54 for the plots of the spurious RF conducted emissions.


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-51: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, 2-DH5**

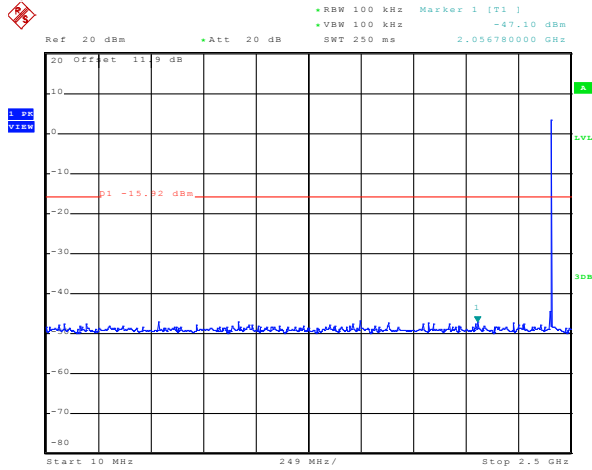


Date: 3.OCT.2012 17:33:30

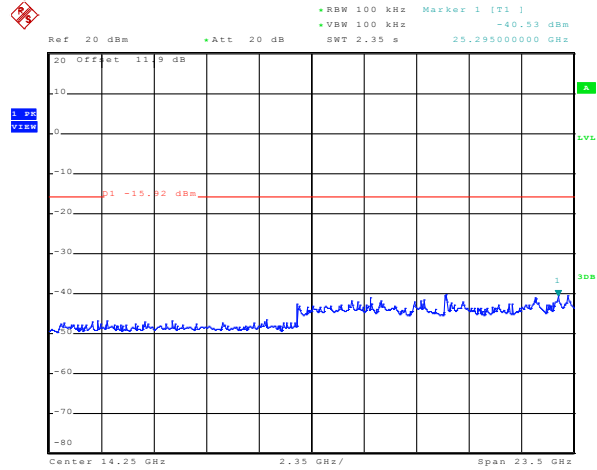


Date: 3.OCT.2012 17:35:46

**Figure 4-52: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, 2-DH5**

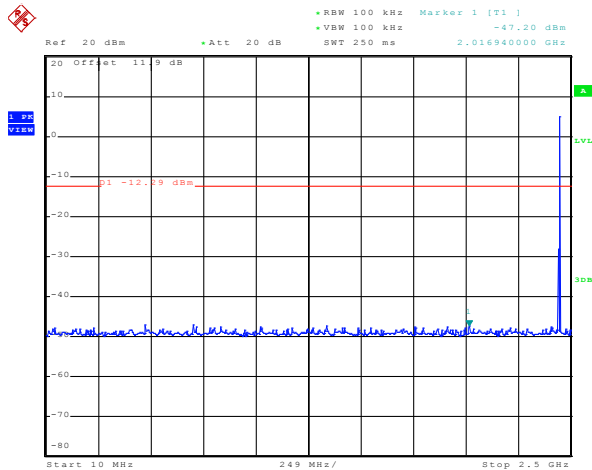

Date: 3.OCT.2012 17:38:46

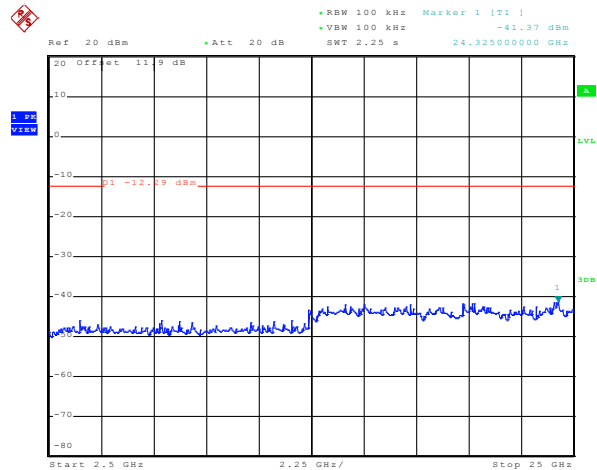

Date: 3.OCT.2012 17:40:54


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-53: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, 2-DH5**

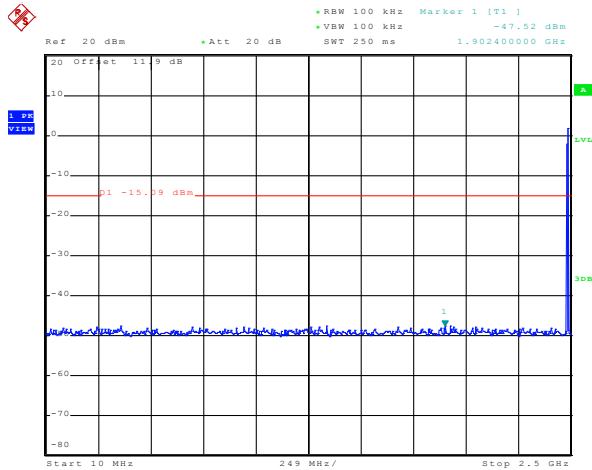


Date: 3.OCT.2012 17:43:31

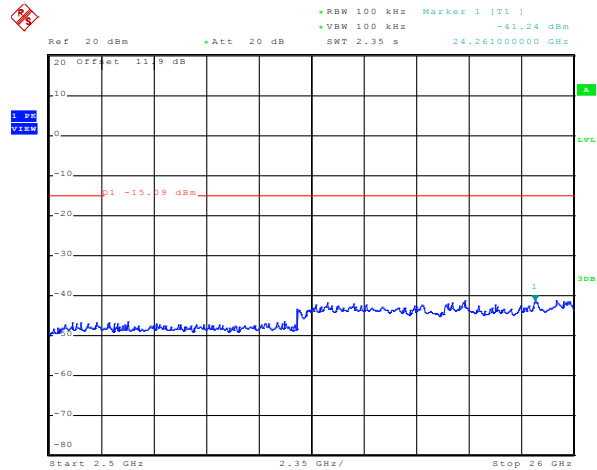


Date: 3.OCT.2012 17:45:21


**Figure 4-54: Spurious RF Conducted Emissions
 Freq. Hopping, Static PBRs, 2-DH5**

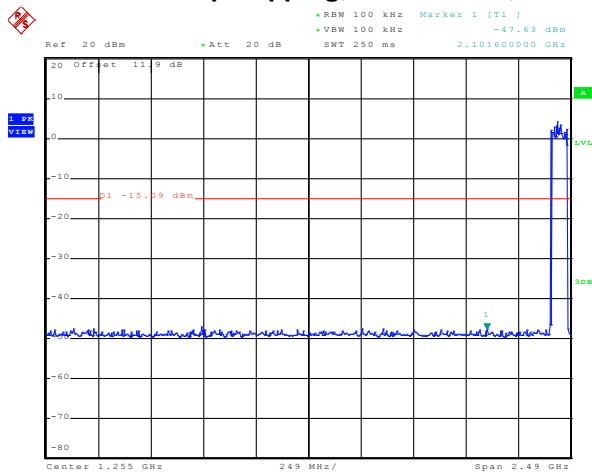

Date: 3.OCT.2012 17:49:49

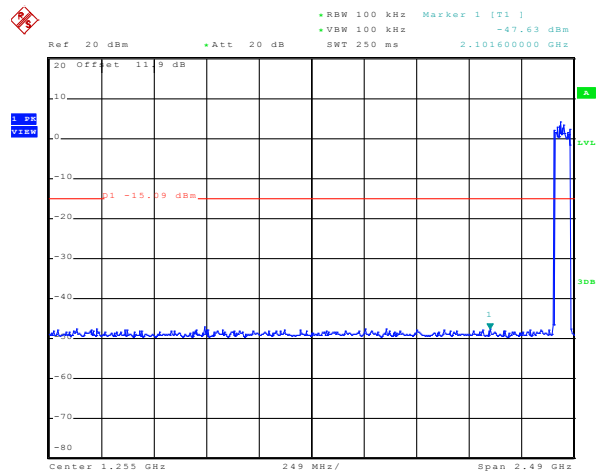

Date: 3.OCT.2012 17:49:49

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type "Static PBRS" and packet type "3-DH5" during the measurements.

Bluetooth Channel	Channel Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from carrier (dBc)	Limit (dBc)
0.00	5.44	-40.74	-46.18	-20.00
39.00	7.16	-41.02	-48.18	-20.00
78.00	4.19	-40.89	-45.08	-20.00
Hopping mode	4.19	-40.60	-44.79	-20.00

See figures 4-55 to 4-58 for the plots of the spurious RF conducted emissions.


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-55: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, 3-DH5**

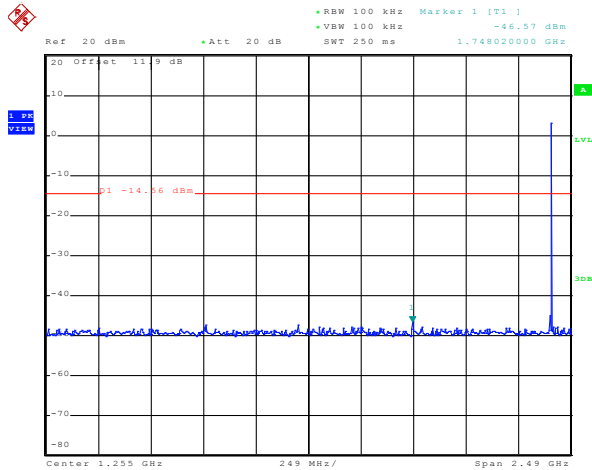


Date: 3.OCT.2012 17:53:19

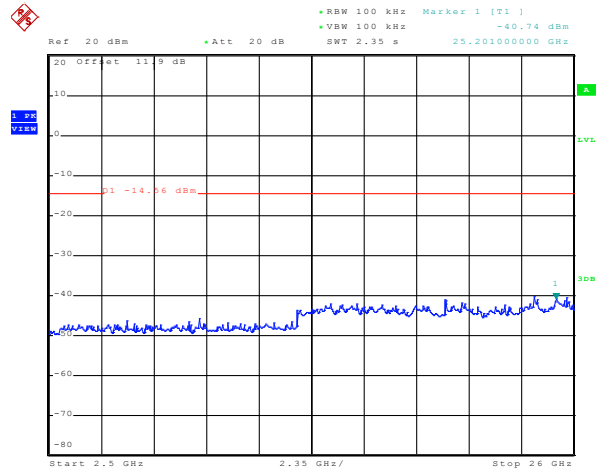


Date: 3.OCT.2012 17:54:46

**Figure 4-56: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, 3-DH5**

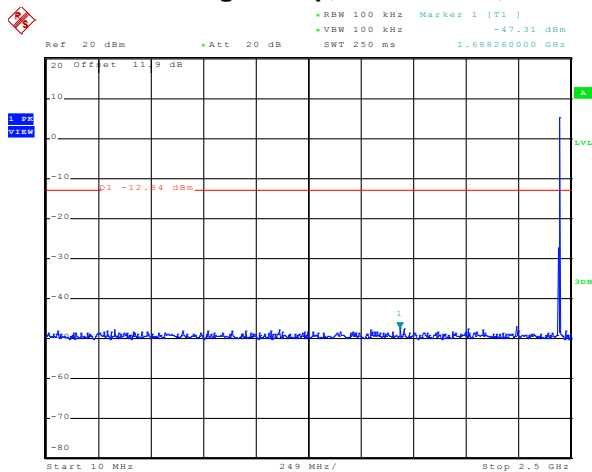

Date: 3.OCT.2012 17:56:38

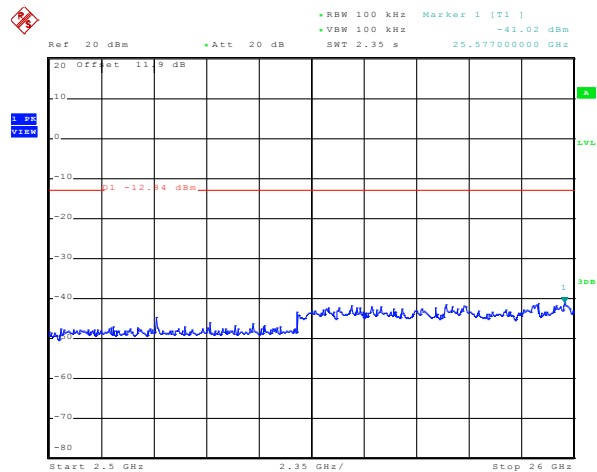

Date: 3.OCT.2012 17:58:04


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 4-57: Spurious RF Conducted Emissions
 Single Freq., Static PBRs, 3-DH5**

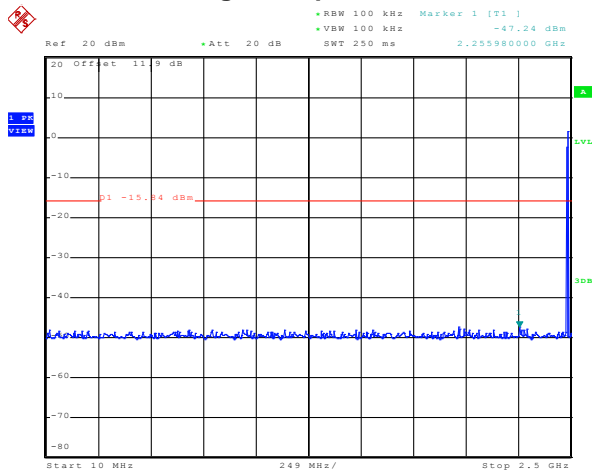


Date: 3.OCT.2012 17:59:46

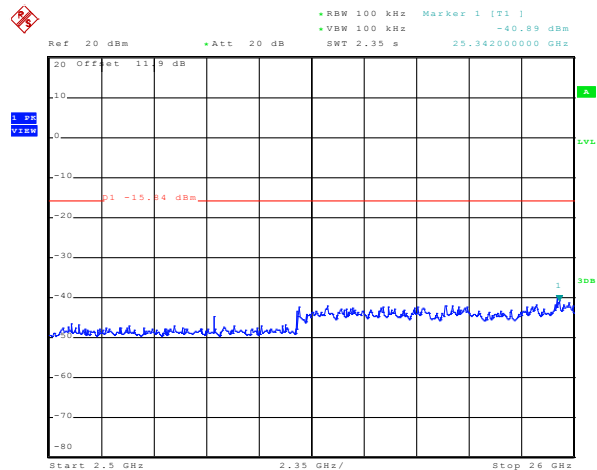


Date: 3.OCT.2012 18:01:25


**Figure 4-58: Spurious RF Conducted Emissions
 Freq. Hopping, Static PBRs, 3-DH5**

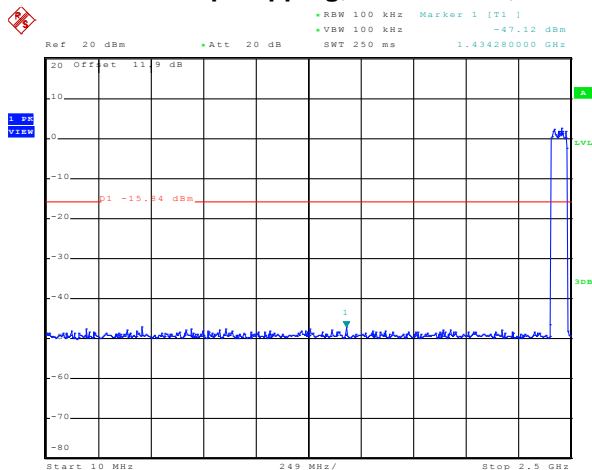

Date: 3.OCT.2012 18:05:15

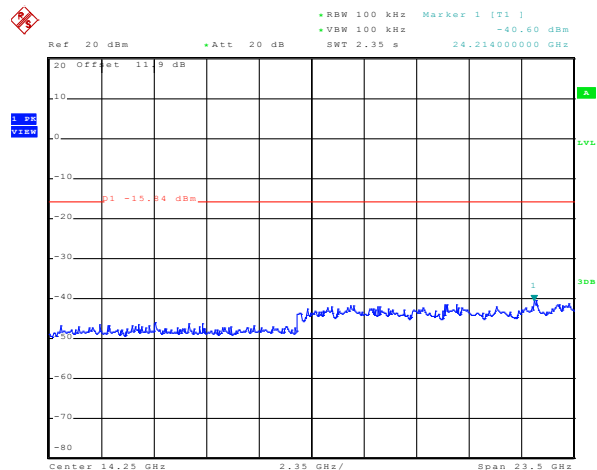

Date: 3.OCT.2012 18:03:16

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012

Bluetooth Low Energy RF Conducted Emission Test Results

6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a)(2) and RSS-210. Channels 0, 20 and 39 were measured.


Channel	Limit (kHz)	Measured Level (kHz)
0	≥ 500	680.20
20	≥ 500	680.20
39	≥ 500	687.40


See figures 4-59 to 4-61 for the plots of the 6 dB bandwidth measurements for Channels 0, 20, and 39.

Figure 4-59: 6 dB Bandwidth LE, Channel 0



Figure 4-60: 6 dB Bandwidth LE, Channel 20

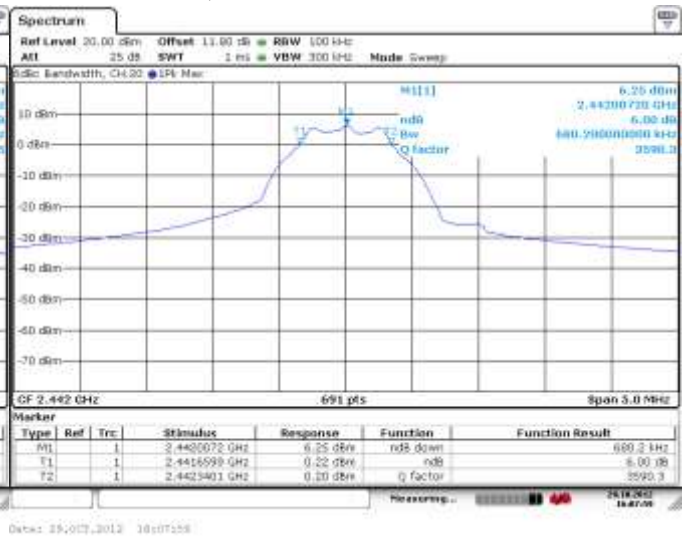


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth Low Energy RF Conducted Emission Test Results cont'd

**Figure 4-61: 6 dB Bandwidth
LE, Channel 39**




	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth Low Energy RF Conducted Emission Test Results cont'd

Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power of class 2 as per 47 CFR 15.247(b)(3) and RSS-210. Channels 0, 20 and 39 were measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 6.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (W)
0	< 1.00	4.4	0.00275
20	< 1.00	6	0.00398
39	< 1.00	2.6	0.00182

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth Low Energy RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Channels 0 and 39 were measured.


Channel	Limit (dBc)	Measured Level (dBc)	Margin (dBc)
0	< -20	-37.98	-17.98
39	< -20	-45.72	-25.72


See figures 4-62 to 4-63 for the plots of the band edge compliance measurements for Channels 0 and 39.

Figure 4-62: Band Edge Compliance LE, Channel 0



Figure 4-63: Band Edge Compliance LE, Channel 39

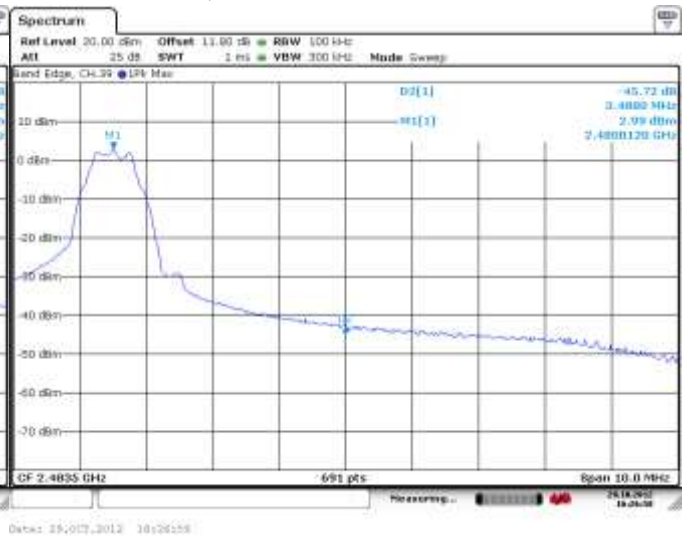


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth Low Energy RF Conducted Emission Test Results cont'd

Peak Power Spectral Density

The EUT met the requirements of the peak power spectral density as per 47 CFR 15.247(d) and RSS-210. Channels 0, 20 and 39 were measured.


Channel	Limit (dBm)	Measured Level (dBm)	Margin (dBm)
0	< 8.00	-10.17	-18.17
20	< 8.00	-8.46	-16.46
39	< 8.00	-11.51	-19.51

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 4	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012


Bluetooth Low Energy RF Conducted Emission Test Results cont'd

See figures 4-64 to 4-66 for the plots of the peak power spectral density for Channels 0, 20 and 39.


**Figure 4-64: Peak Power Spectral Density
LE, Channel 0**

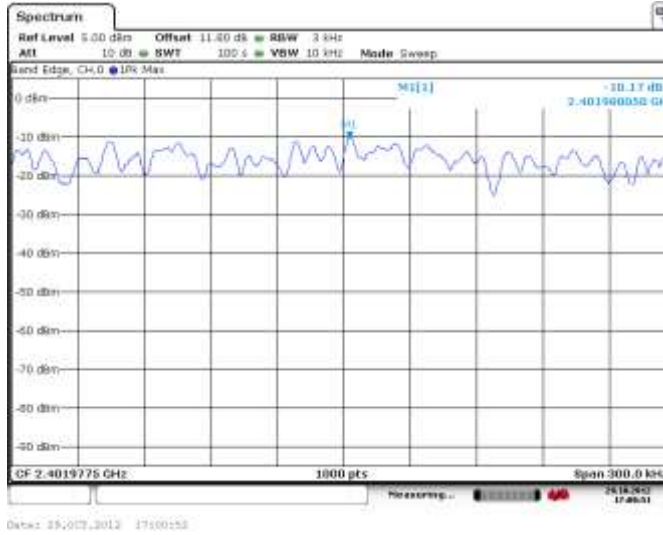


**Figure 4-65: Peak Power Spectral Density
LE, Channel 20**

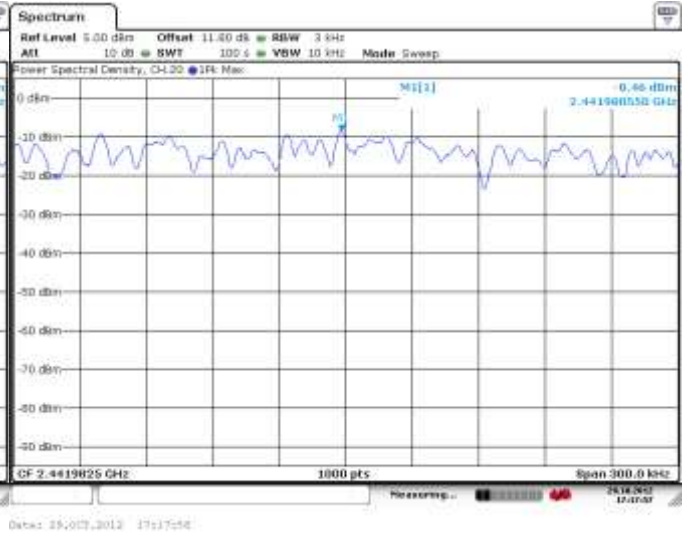

**Figure 4-66: Peak Power Spectral Density
LE, Channel 39**

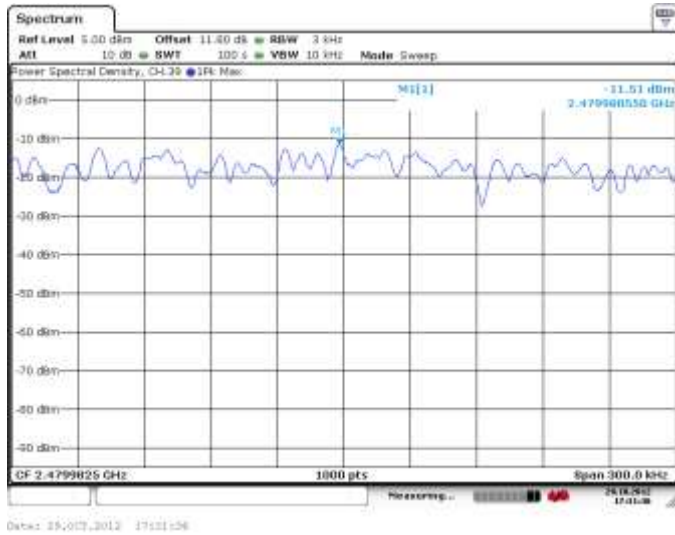

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 4	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Bluetooth Low Energy RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions


The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 0, 20 and 39 were measured. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 6.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from Carrier (dBC)	Limit (dBC)
0	4.4	-37.7	-42.1	-20
20	6.0	-36.3	-42.3	-20
39	2.6	-35.4	-38.0	-20

The emissions were in the NF.

See figures 4-67 to 4-69 for the plots of the spurious RF conducted emissions for Channels 0, 20 and 39.

**Figure 4-67: Spurious Conducted RF Emissions
LE, Channel 0**

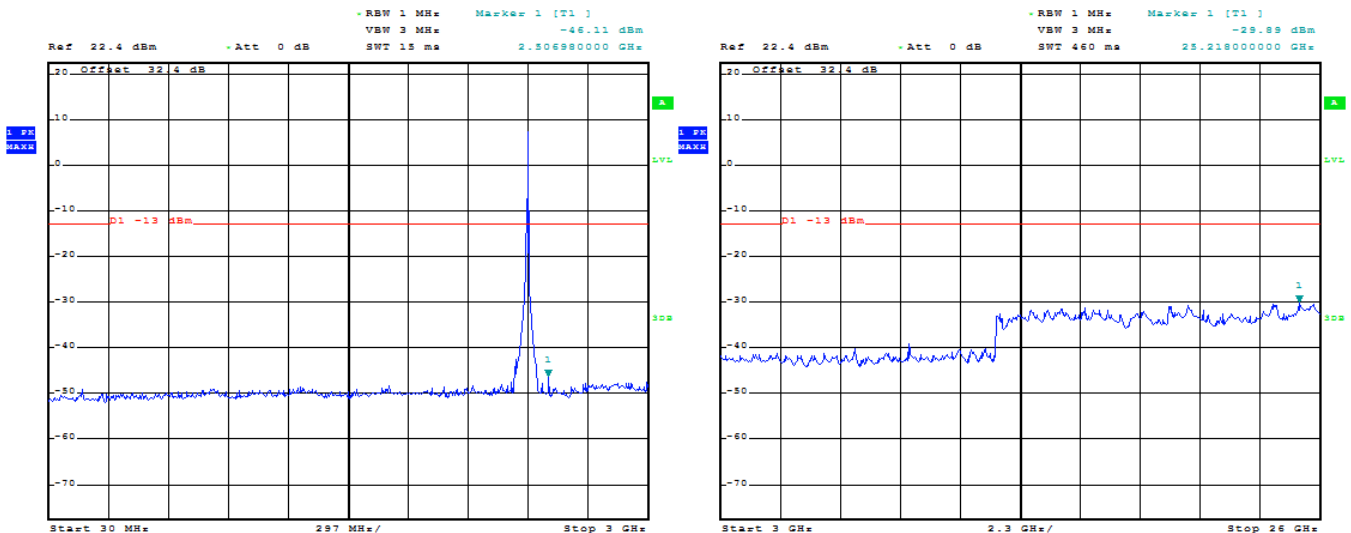


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26 2012


FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW


Bluetooth Low Energy RF Conducted Emission Test Results cont'd

**Figure 4-68 : Spurious Conducted RF Emissions
 LE, Channel 20**

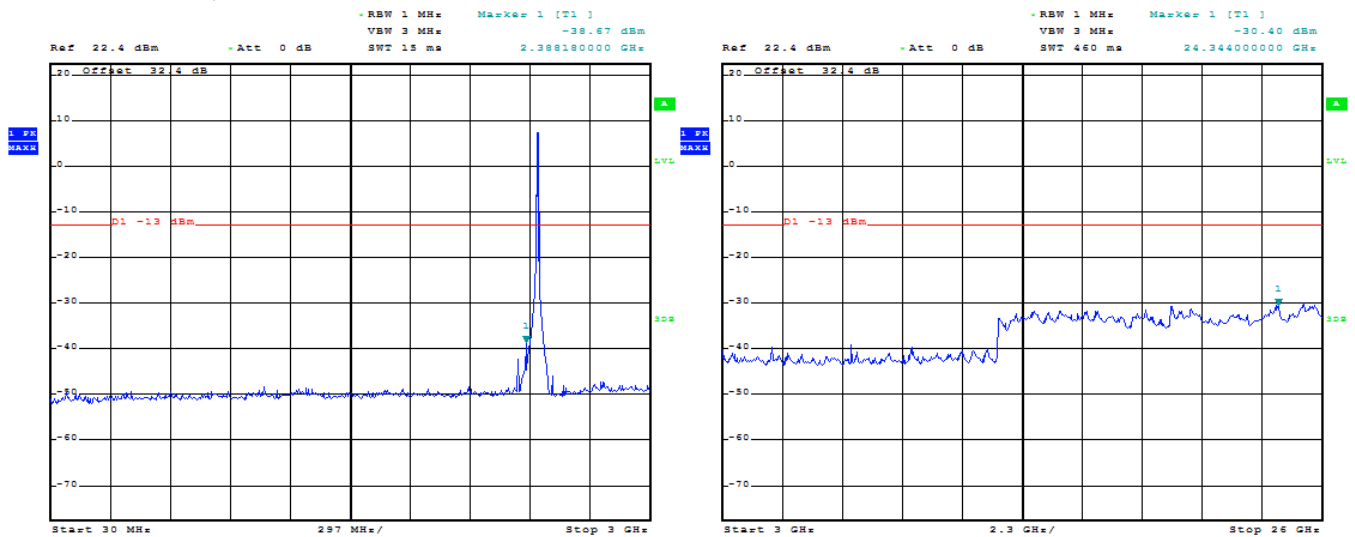


**Figure 4-69: Spurious Conducted RF Emissions
 LE, Channel 39**

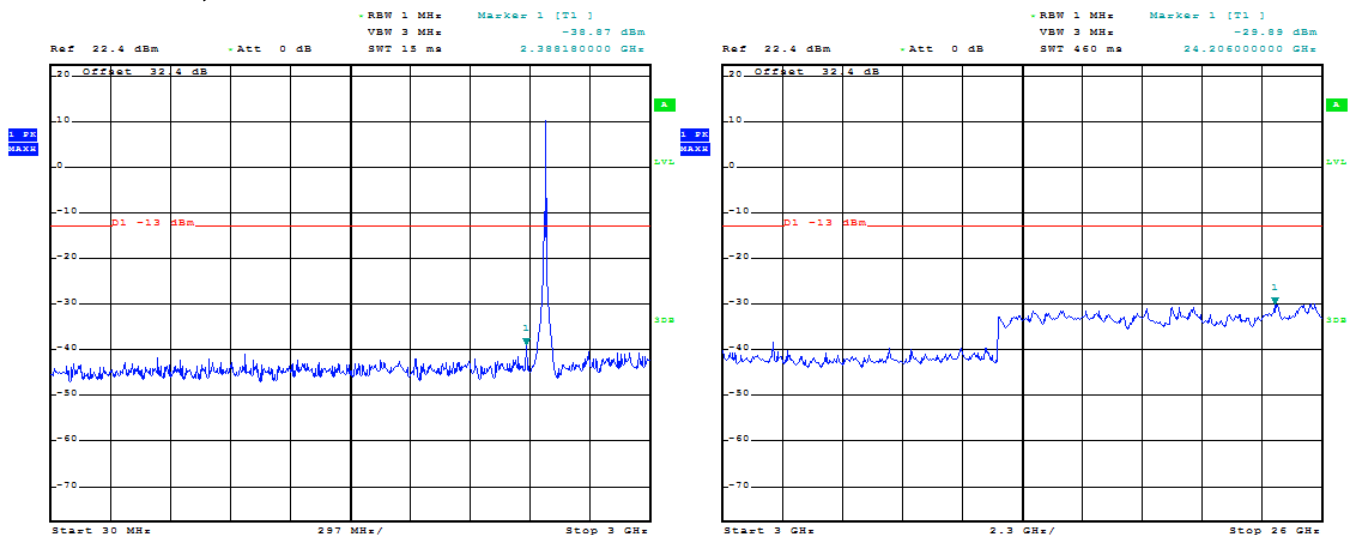

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

APPENDIX 5 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd

6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a)(2) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode.


Channel	Data Rate	Limit (kHz)	Measured Level (MHz)
1	1 Mbps	≥ 500	10.04
	5.5 Mbps	≥ 500	10.30
	11 Mbps	≥ 500	10.36
	6 Mbps	≥ 500	15.63
	24 Mbps	≥ 500	16.53
	54 Mbps	≥ 500	16.53
	MCS 0	≥ 500	16.27
	MCS 4	≥ 500	17.74
	MCS 7	≥ 500	17.77
6	1 Mbps	≥ 500	9.52
	5.5 Mbps	≥ 500	9.64
	11 Mbps	≥ 500	9.90
	6 Mbps	≥ 500	15.66
	24 Mbps	≥ 500	16.44
	54 Mbps	≥ 500	16.48
	MCS 0	≥ 500	16.06
	MCS 4	≥ 500	17.66
	MCS 7	≥ 500	17.69
11	1 Mbps	≥ 500	8.60
	5.5 Mbps	≥ 500	9.99
	11 Mbps	≥ 500	9.49
	6 Mbps	≥ 500	15.11
	24 Mbps	≥ 500	16.50
	54 Mbps	≥ 500	16.50
	MCS 0	≥ 500	15.11
	MCS 4	≥ 500	17.72
	MCS 7	≥ 500	17.74

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012


802.11b/g/n RF Conducted Emission Test Results cont'd

See figures 5-1 to 5-9 for the plots of the 6 dB bandwidth measurements for Channels 1, 6, and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.


**Figure 5-1: 6 dB Bandwidth
802.11b, Channel 1, 1 Mbps**

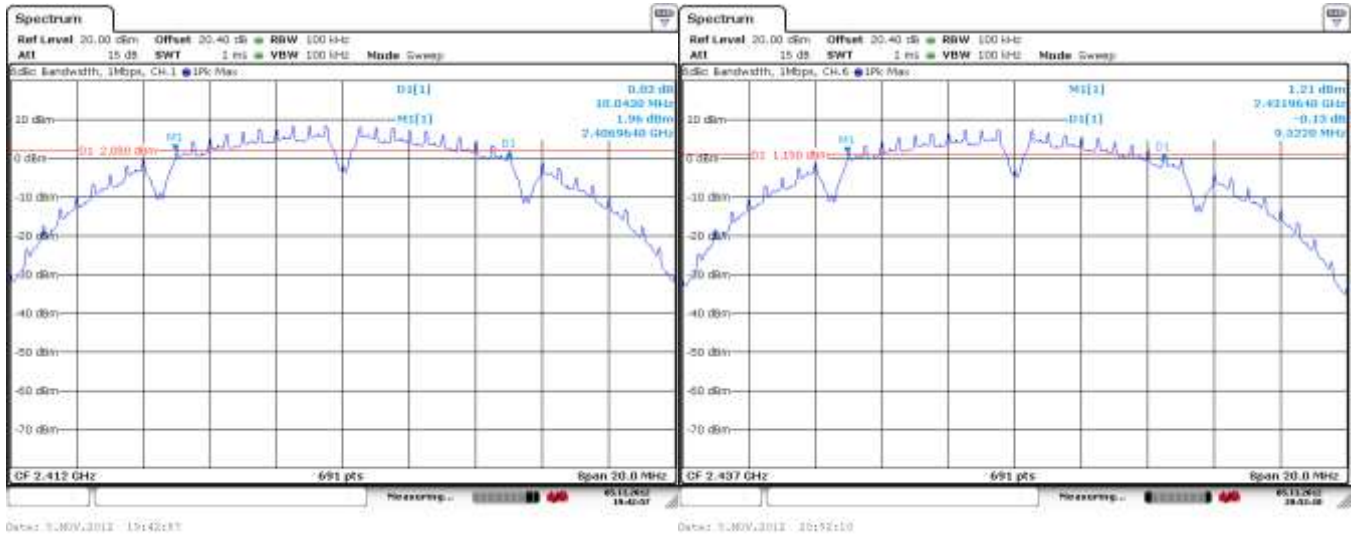


**Figure 5-2: 6 dB Bandwidth
802.11b, Channel 6, 1 Mbps**

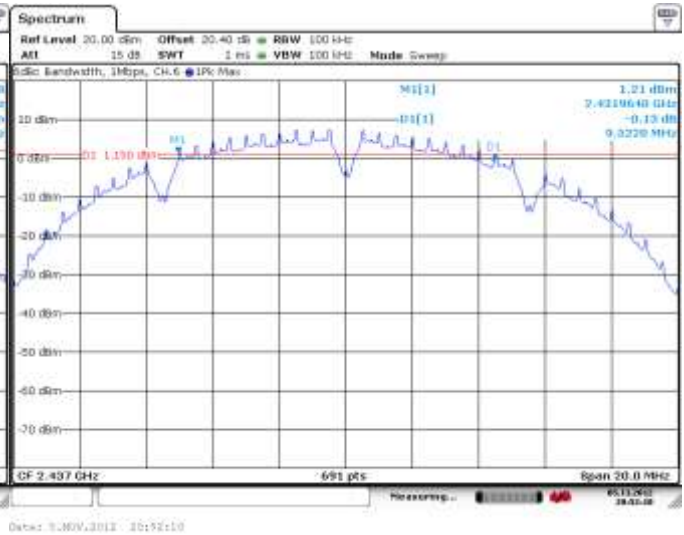


**Figure 5-3: 6 dB Bandwidth
802.11b, Channel 11, 1 Mbps**

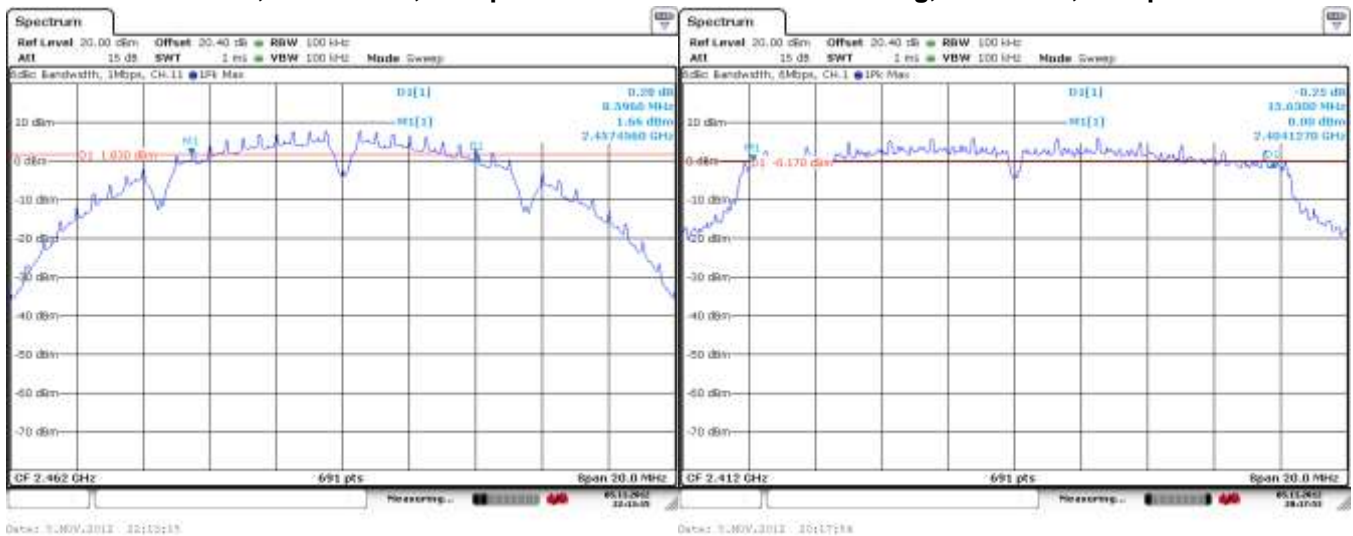


**Figure 5-4: 6 dB Bandwidth
802.11g, Channel 1, 6 Mbps**

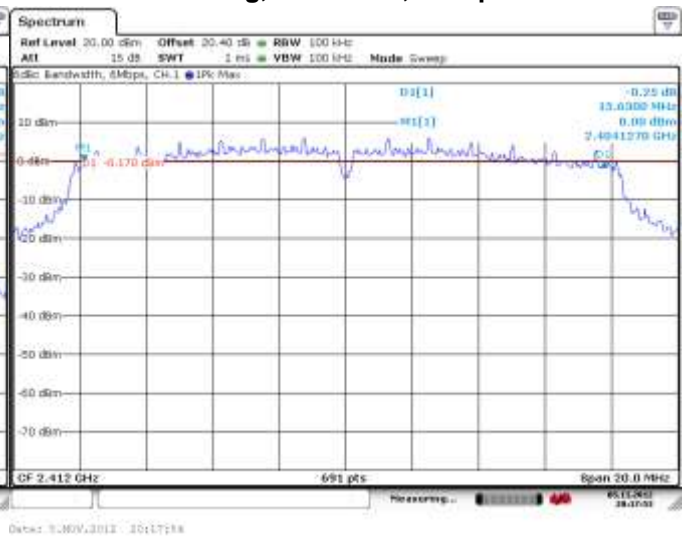


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012

802.11b/g/n RF Conducted Emission Test Results cont'd


**Figure 5-5: 6 dB Bandwidth
802.11g, Channel 6, 6 Mbps**

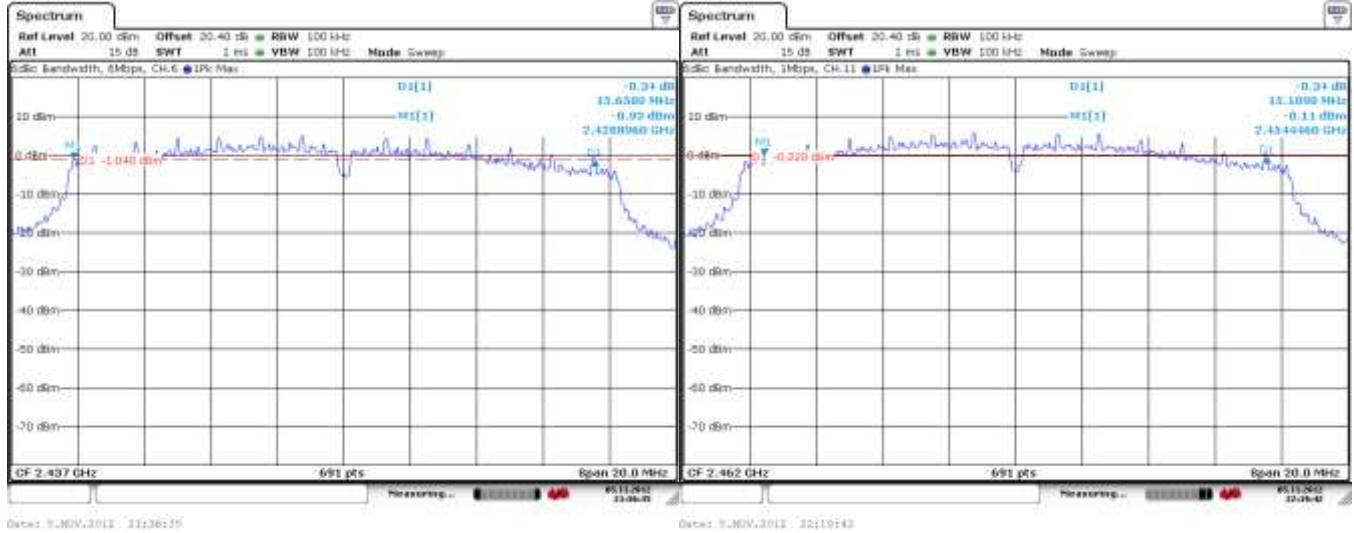


**Figure 5-6: 6 dB Bandwidth
802.11g, Channel 11, 6 Mbps**

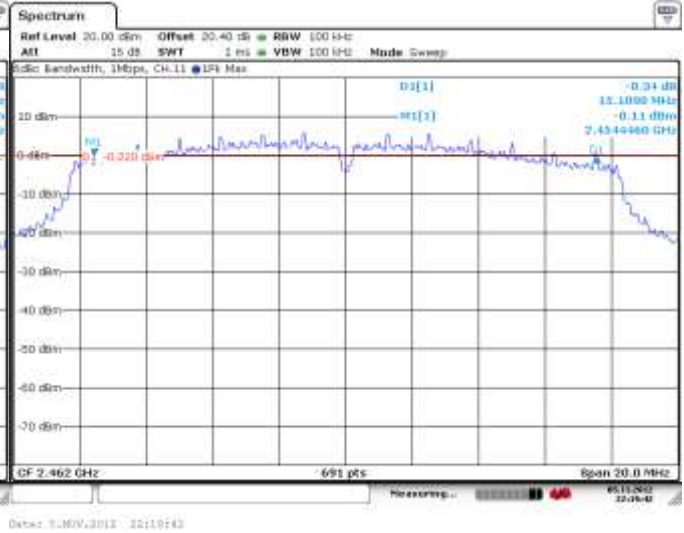

**Figure 5-7: 6 dB Bandwidth
802.11n, Channel 1, MCS 0**

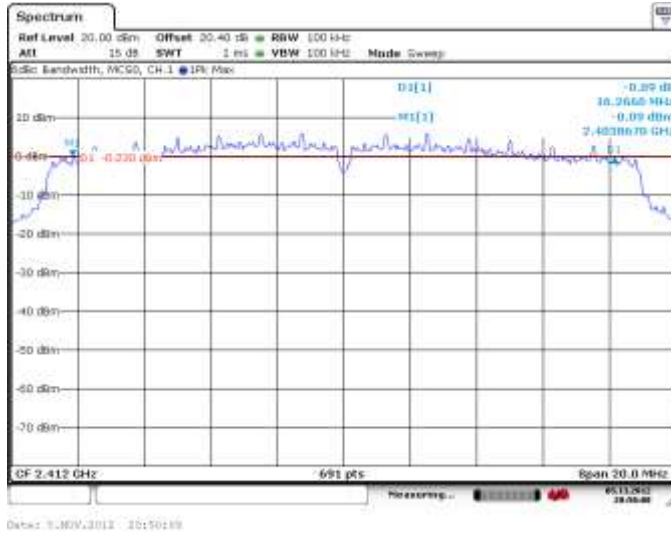

**Figure 5-8: 6 dB Bandwidth
802.11n, Channel 6, MCS 0**

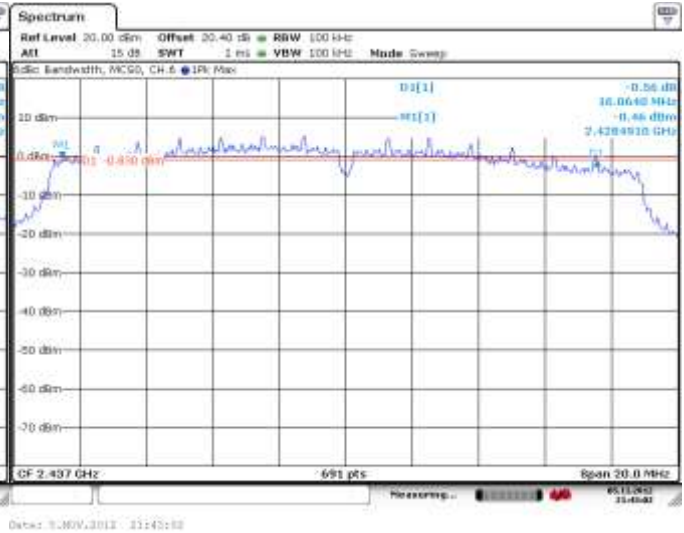


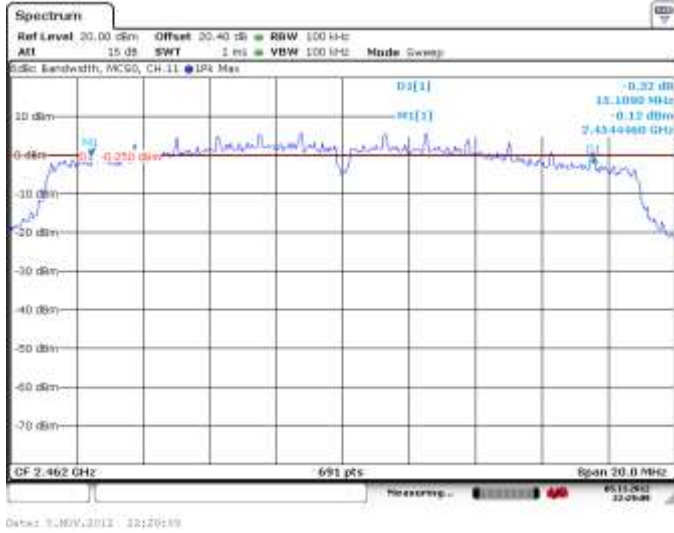

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Figure 5-9: 6 dB Bandwidth
802.11n, Channel 11, MCS 0




	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd

Maximum Conducted Output Power


The EUT met the requirements of the maximum conducted output power of class 2 as per 47 CFR 15.247(b)(3) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4 and 7 for 802.11n mode using an Aglient power meter, model N1911A with model N1921A power sensor. A reference offset of 18.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (W)
1	1 Mbps	< 1.00	17.16	0.052
	5.5 Mbps	< 1.00	17.01	0.050
	11 Mbps	< 1.00	16.92	0.049
	6 Mbps	< 1.00	16.57	0.045
	24 Mbps	< 1.00	15.96	0.039
	54 Mbps	< 1.00	14.23	0.026
	MCS 0	< 1.00	16.46	0.044
	MCS 4	< 1.00	15.66	0.037
	MCS 7	< 1.00	12.27	0.017
6	1 Mbps	< 1.00	16.05	0.040
	5.5 Mbps	< 1.00	15.97	0.040
	11 Mbps	< 1.00	15.67	0.037
	6 Mbps	< 1.00	15.52	0.036
	24 Mbps	< 1.00	15.02	0.032
	54 Mbps	< 1.00	13.59	0.023
	MCS 0	< 1.00	15.32	0.034
	MCS 4	< 1.00	14.78	0.030
	MCS 7	< 1.00	11.51	0.014

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (W)
11	1 Mbps	< 1.00	16.50	0.045
	5.5 Mbps	< 1.00	16.42	0.044
	11 Mbps	< 1.00	16.23	0.042
	6 Mbps	< 1.00	16.10	0.041
	24 Mbps	< 1.00	15.55	0.036
	54 Mbps	< 1.00	13.94	0.025
	MCS 0	< 1.00	15.98	0.039
	MCS 4	< 1.00	15.31	0.034
	MCS 7	< 1.00	11.80	0.015

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


802.11b/g/n RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Channels 1 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4 and 7 for 802.11n mode.

Channel	Data Rate	Limit (dBc)	Measured Level (dBc)	Margin (dBc)
1	1 Mbps	< -20	-45.38	-25.38
	5.5 Mbps	< -20	-44.65	-24.65
	11 Mbps	< -20	-45.05	-25.05
	6 Mbps	< -20	-27.04	-7.04
	24 Mbps	< -20	-25.10	-5.10
	54 Mbps	< -20	-26.57	-6.57
	MCS 0	< -20	-26.07	-6.07
	MCS 4	< -20	-25.85	-5.85
	MCS 7	< -20	-27.48	-7.48
11	1 Mbps	< -20	-46.44	-26.44
	5.5 Mbps	< -20	-45.31	-25.31
	11 Mbps	< -20	-45.32	-25.32
	6 Mbps	< -20	-36.21	-16.21
	24 Mbps	< -20	-35.48	-15.48
	54 Mbps	< -20	-35.92	-15.92
	MCS 0	< -20	-36.57	-16.57
	MCS 4	< -20	-35.80	-15.80
	MCS 7	< -20	-37.60	-17.60

See figures 5-10 to 5-15 for the plots of the band edge compliance measurements for Channels 1 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-10: Band Edge Compliance
802.11b, Channel 1, 1 Mbps

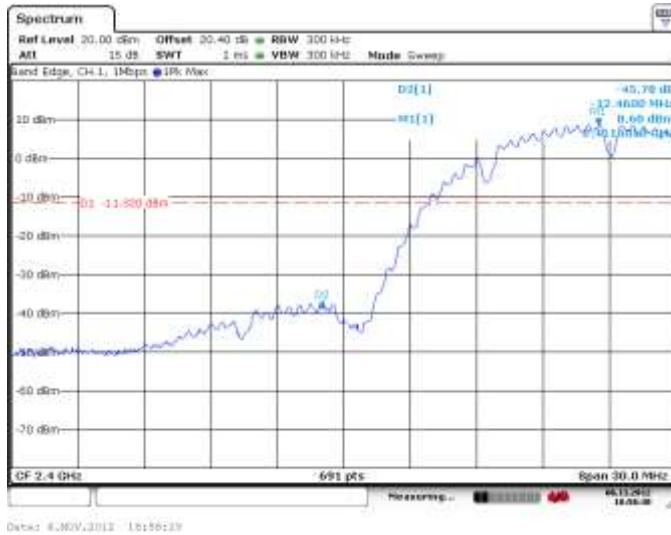


Figure 5-11: Band Edge Compliance
802.11b, Channel 11, 1 Mbps

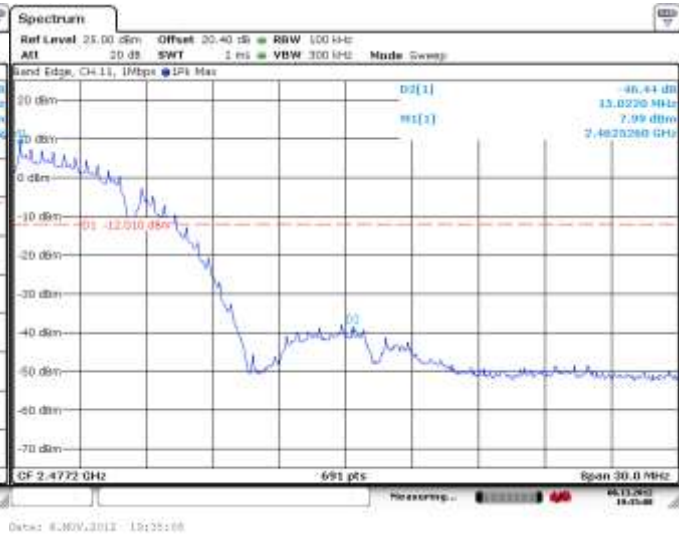


Figure 5-12: Band Edge Compliance
802.11g, Channel 1, 6 Mbps


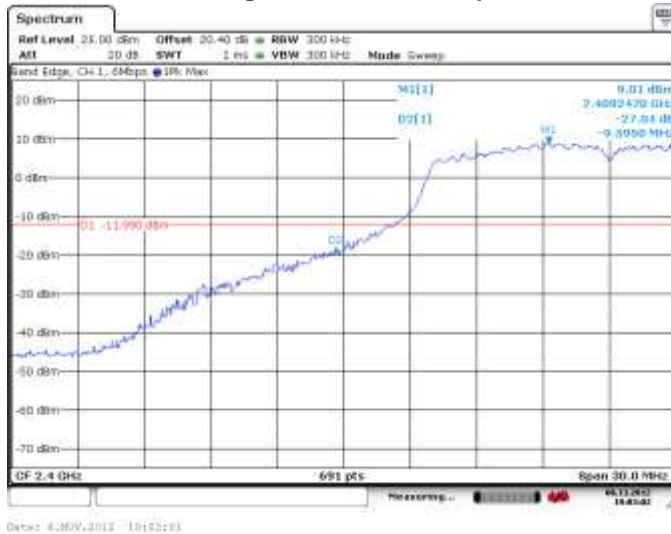



Figure 5-13: Band Edge Compliance
802.11g, Channel 11, 6 Mbps

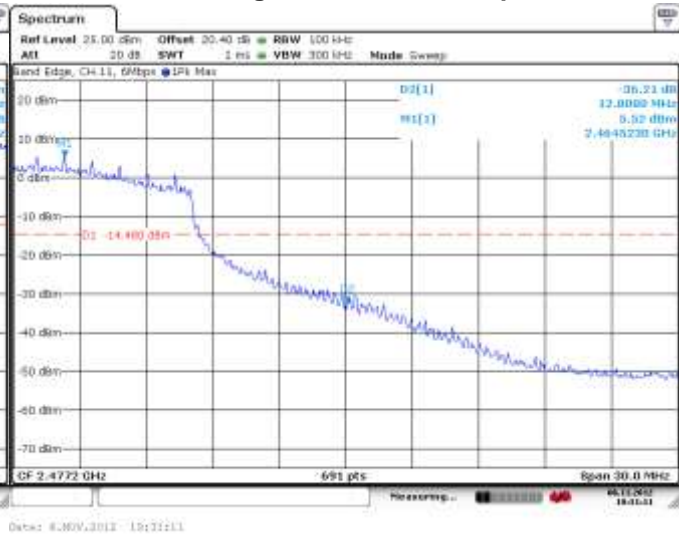


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-14: Band Edge Compliance
802.11n, Channel 1, MCS 0

Figure 5-15: Band Edge Compliance
802.11n, Channel 11, MCS 0




	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd

Peak Power Spectral Density

The EUT met the requirements of the peak power spectral density as per 47 CFR 15.247(d) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode.


Channel	Data Rate	Limit (dBm)	Measured Level (dBm)	Margin (dBm)
1	1 Mbps	< 8.00	-4.97	-12.97
	5.5 Mbps	< 8.00	-7.20	-15.20
	11 Mbps	< 8.00	-7.14	-15.14
	6 Mbps	< 8.00	-5.99	-13.99
	24 Mbps	< 8.00	-8.53	-16.53
	54 Mbps	< 8.00	-9.96	-17.96
	MCS 0	< 8.00	-6.05	-14.05
	MCS 4	< 8.00	-7.99	-15.99
	MCS 7	< 8.00	-10.89	-18.89
6	1 Mbps	< 8.00	-5.75	-13.75
	5.5 Mbps	< 8.00	-8.35	-16.35
	11 Mbps	< 8.00	-8.13	-16.13
	6 Mbps	< 8.00	-7.00	-15.00
	24 Mbps	< 8.00	-7.78	-15.78
	54 Mbps	< 8.00	-10.76	-18.76
	MCS 0	< 8.00	-6.61	-14.61
	MCS 4	< 8.00	-8.97	-16.97
	MCS 7	< 8.00	-10.57	-18.57
11	1 Mbps	< 8.00	-5.18	-13.18
	5.5 Mbps	< 8.00	-7.63	-15.63
	11 Mbps	< 8.00	-7.62	-15.62
	6 Mbps	< 8.00	-6.78	-14.78
	24 Mbps	< 8.00	-7.62	-15.62
	54 Mbps	< 8.00	-9.93	-17.93
	MCS 0	< 8.00	-6.69	-14.69
	MCS 4	< 8.00	-8.24	-16.24
	MCS 7	< 8.00	-10.75	-18.75

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


802.11b/g/n RF Conducted Emission Test Results cont'd

See figures 5-16 to 5-24 for the plots of the peak power spectral density for Channels 1, 6 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 for 802.11n mode.


**Figure 5-16: Peak Power Spectral Density
802.11b, Channel 1, 1 Mbps**

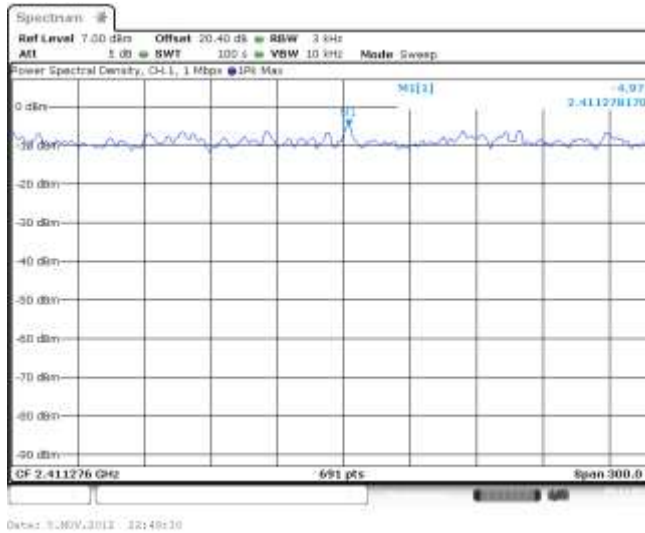


**Figure 5-17: Peak Power Spectral Density
802.11b, Channel 6, 1 Mbps**

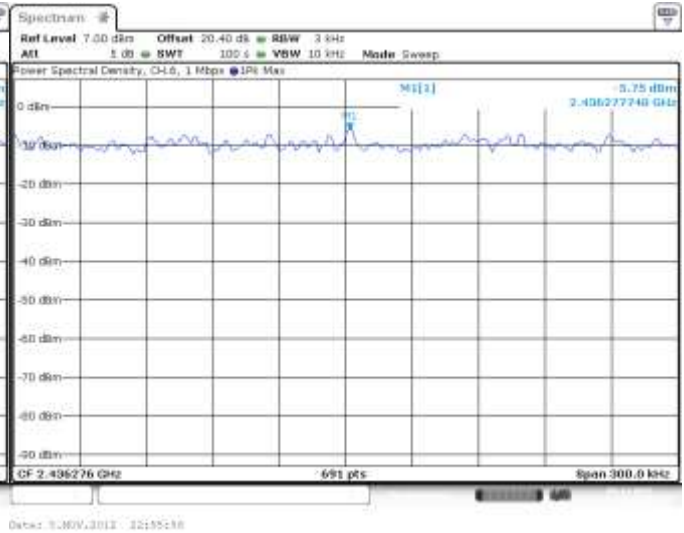


**Figure 5-18: Peak Power Spectral Density
802.11b, Channel 11, 1 Mbps**

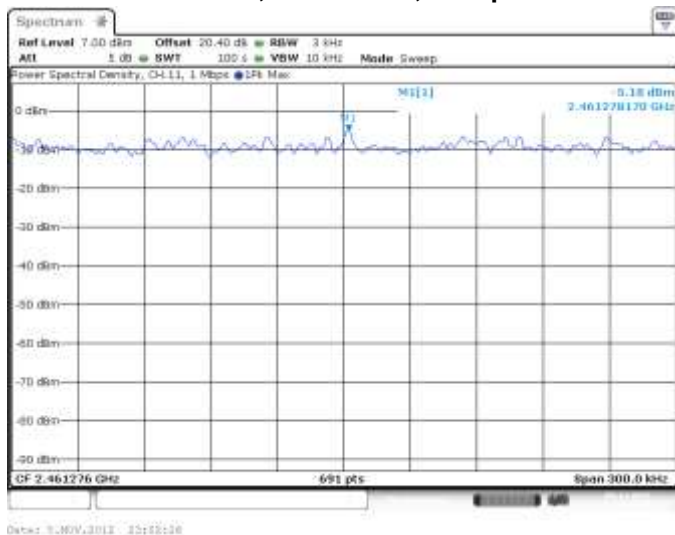


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd


**Figure 5-19: Peak Power Spectral Density
802.11g, Channel 1, 6 Mbps**

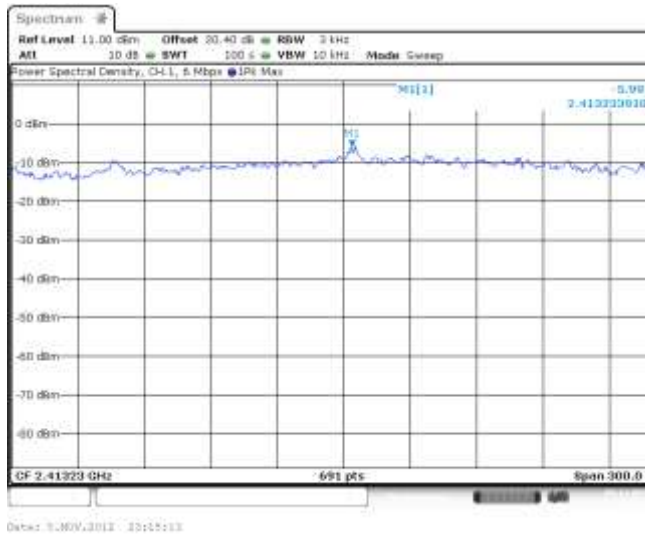


**Figure 5-20: Peak Power Spectral Density
802.11g, Channel 6, 6 Mbps**

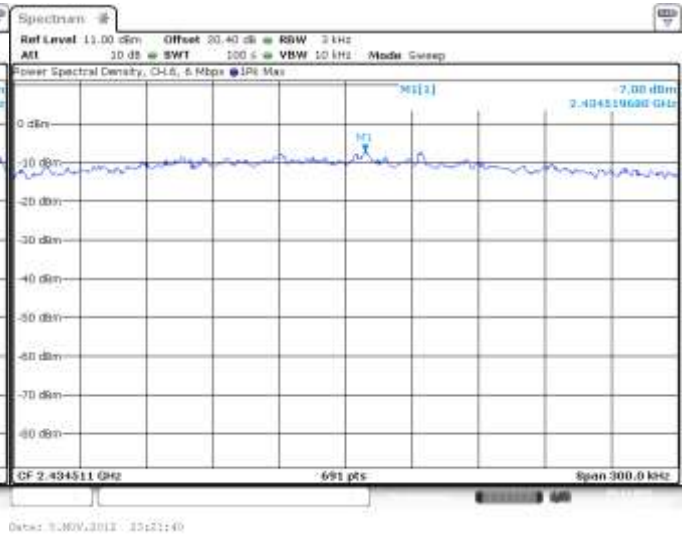


**Figure 5-21: Peak Power Spectral Density
802.11g, Channel 11, 6 Mbps**

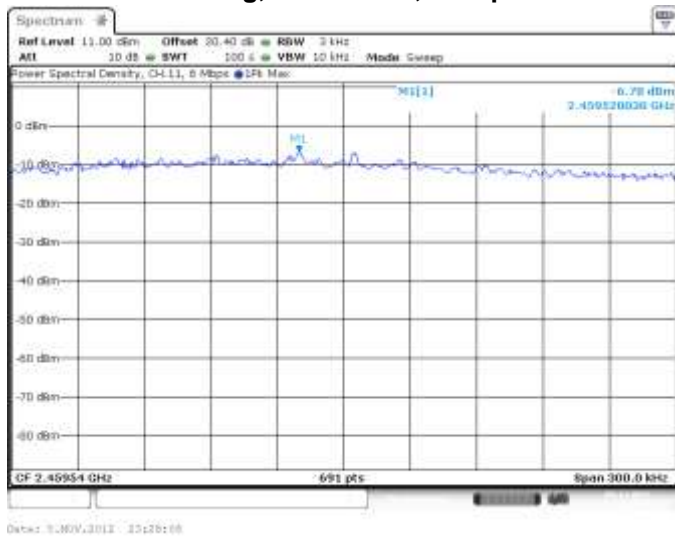


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd


**Figure 5-22: Peak Power Spectral Density
802.11n, Channel 1, MCS 0**

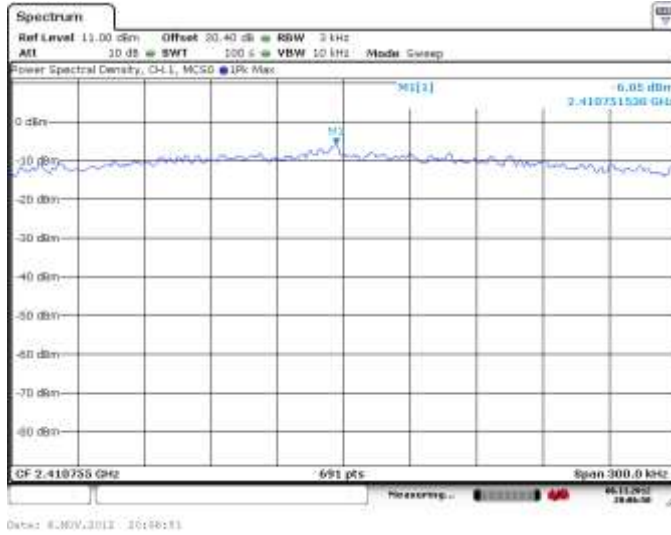


**Figure 5-23: Peak Power Spectral Density
802.11n, Channel 6, MCS 0**

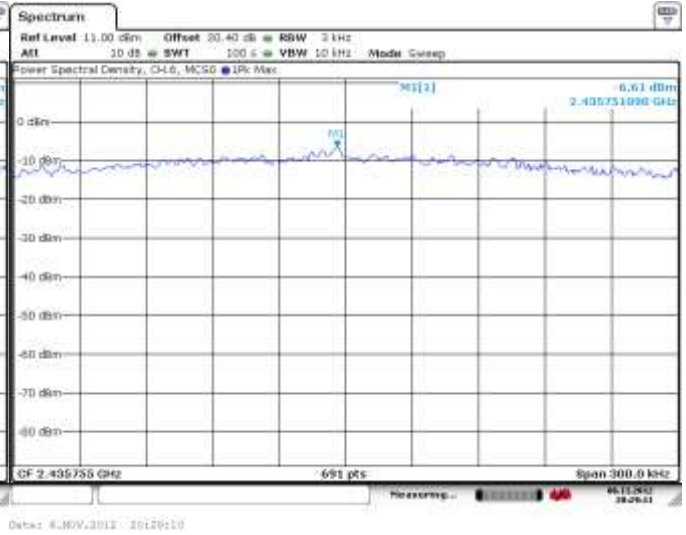

**Figure 5-24: Peak Power Spectral Density
802.11n, Channel 11, MCS 0**

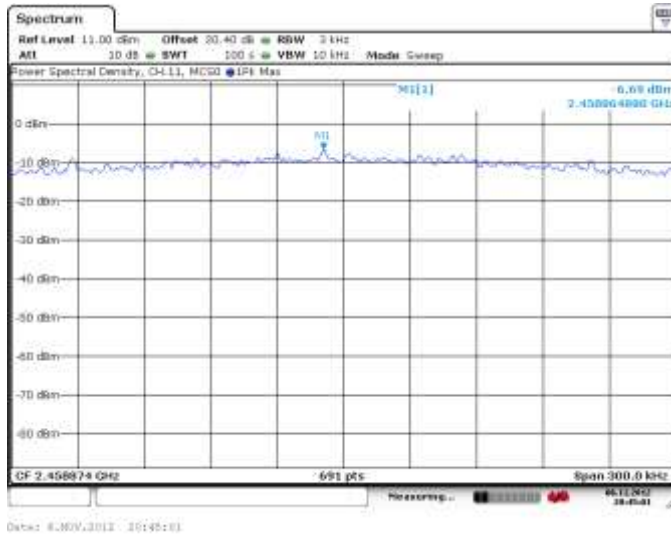


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 18.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Data Rate	Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from Carrier (dBc)	Limit (dBc)
1	1 Mbps	18.82	-44.56	-61.72234818	-20
	5.5 Mbps	18.79	-45.85	-62.85911804	-20
	11 Mbps	18.73	-45.18	-62.10422012	-20
	6 Mbps	12.68	-45.85	-62.41911804	-20
	24 Mbps	11.80	-44.90	-60.86207748	-20
	54 Mbps	12.45	-45.75	-59.98061111	-20
	MCS 0	12.39	-45.40	-61.85554291	-20
	MCS 4	12.46	-45.03	-60.69185349	-20
	MCS 7	11.90	-45.38	-57.65379745	-20
6	1 Mbps	18.43	-46.09	-62.14019928	-20
	5.5 Mbps	18.41	-44.79	-60.75735046	-20
	11 Mbps	18.38	-45.52	-61.191035	-20
	6 Mbps	16.82	-45.93	-61.4487384	-20
	24 Mbps	16.25	-44.89	-59.91098053	-20
	54 Mbps	12.83	-45.52	-59.10626663	-20
	MCS 0	16.33	-45.69	-61.01447021	-20
	MCS 4	15.75	-44.96	-59.74001129	-20
	MCS 7	11.05	-45.34	-56.84697586	-20


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11b/g/n RF Conducted Emission Test Results cont'd

Channel	Data Rate	Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from Carrier (dBc)	Limit (dBc)
11	1 Mbps	17.88	-44.50	-61.000634	-20
	5.5 Mbps	17.76	-45.78	-62.19758865	-20
	11 Mbps	17.72	-45.61	-61.83731964	-20
	6 Mbps	12.03	-45.65	-61.75320663	-20
	24 Mbps	11.92	-45.21	-60.76409683	-20
	54 Mbps	11.76	-44.40	-58.33734344	-20
	MCS 0	11.74	-46.20	-62.18039063	-20
	MCS 4	11.63	-45.80	-61.11465012	-20
	MCS 7	10.80	-45.47	-57.26635513	-20


The emissions were in the NF.

See figures 5-25 to 5-33 for the plots of the spurious RF conducted emissions for Channels 1, 6 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012

802.11b/g/n RF Conducted Emission Test Results cont'd

**Figure 5-25: Spurious Conducted RF Emissions
802.11b, Channel 1, 1 Mbps**

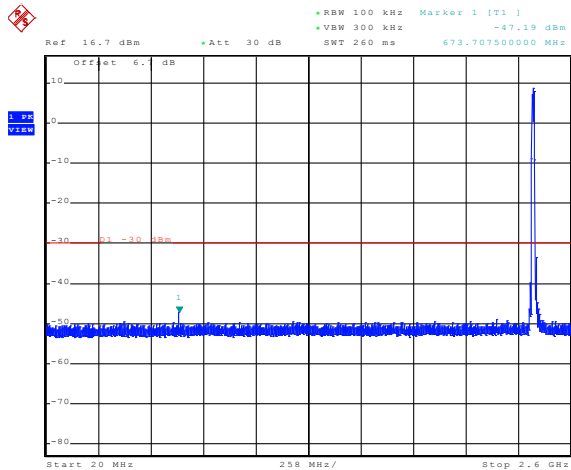


Date: 19.NOV.2012 11:35:06

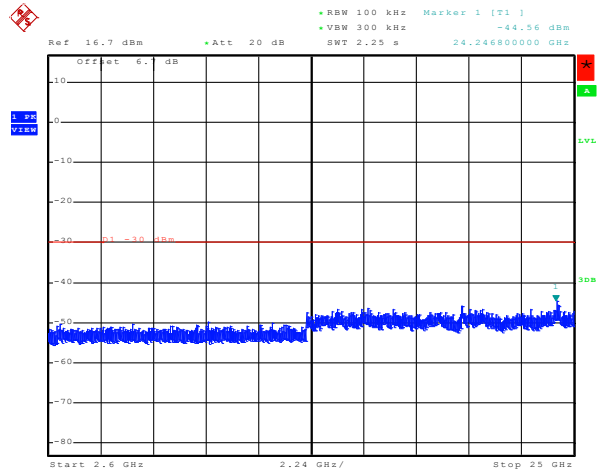


Date: 16.NOV.2012 10:56:42


**Figure 5-26 : Spurious Conducted RF Emissions
802.11b, Channel 6, 1 Mbps**

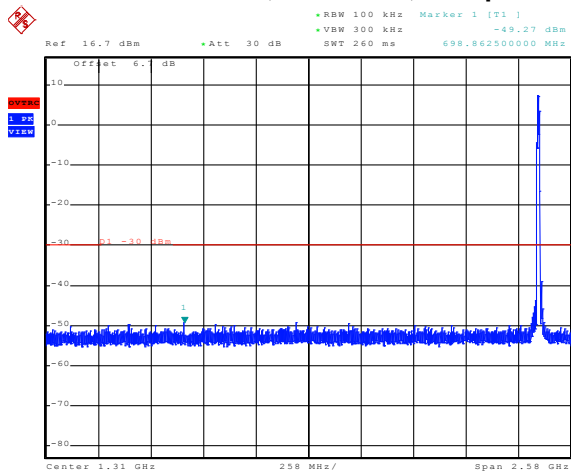

Date: 19.NOV.2012 11:44:01


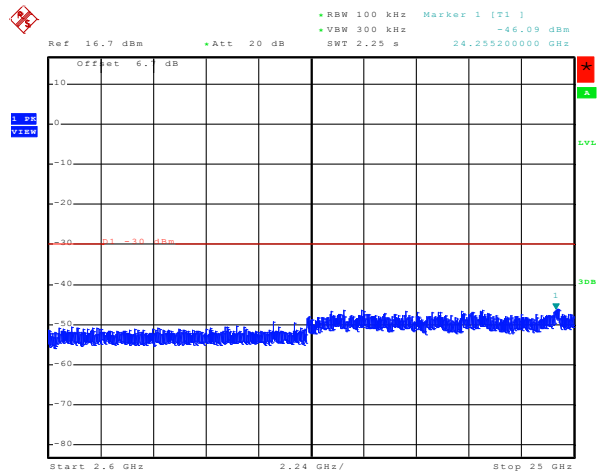


Date: 16.NOV.2012 11:06:34

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11b/g/n RF Conducted Emission Test Results cont'd



**Figure 5-27: Spurious Conducted RF Emissions
802.11b, Channel 11, 1 Mbps**

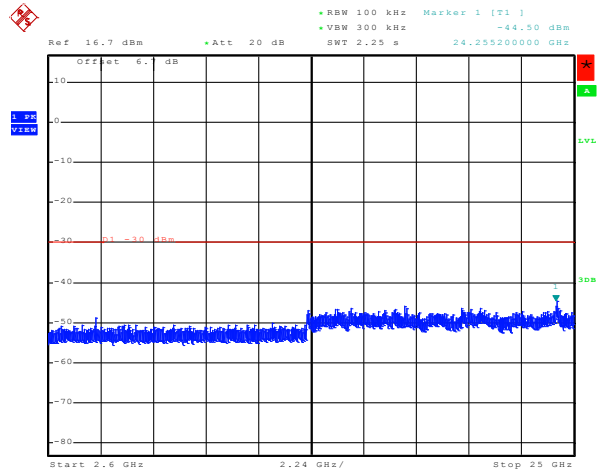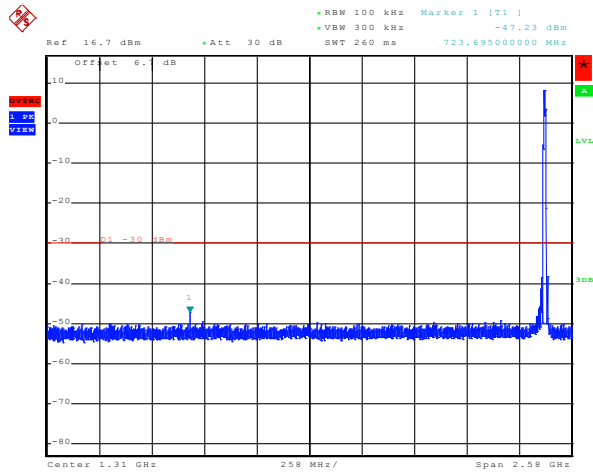

Date: 19.NOV.2012 11:57:25


Date: 16.NOV.2012 11:11:37

**Figure 5-28: Spurious Conducted RF Emissions
802.11g, Channel 1, 6 Mbps**

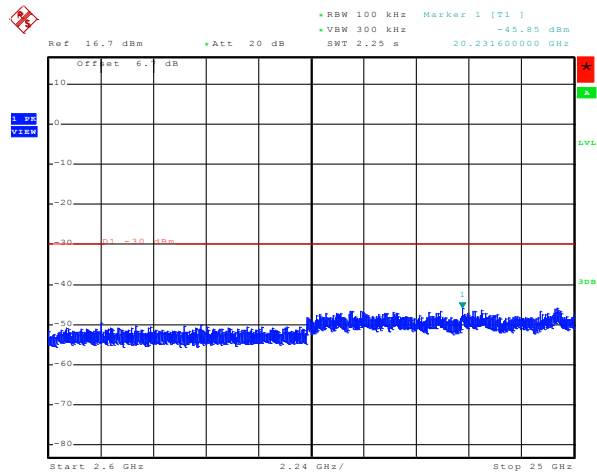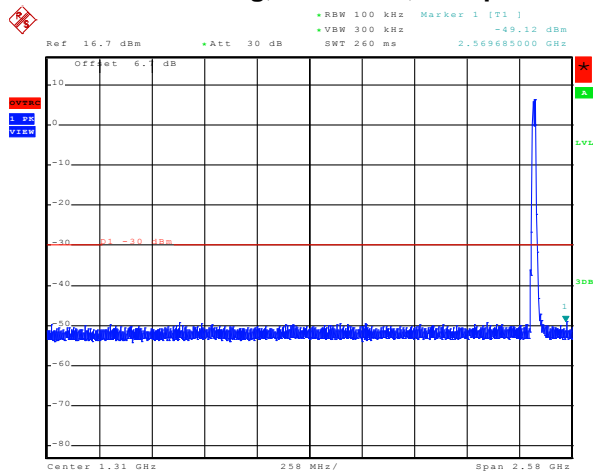


Date: 19.NOV.2012 11:40:48

Date: 16.NOV.2012 11:16:41


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012

802.11b/g/n RF Conducted Emission Test Results cont'd

**Figure 5-29: Spurious Conducted RF Emissions
802.11g, Channel 6, 6 Mbps**

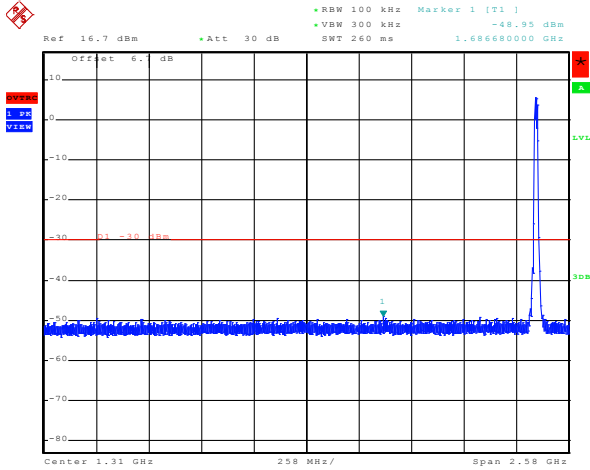


Date: 19.NOV.2012 11:47:31

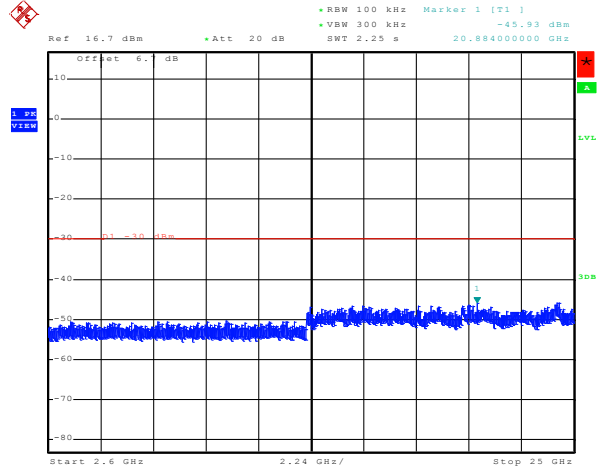


Date: 16.NOV.2012 11:21:44


**Figure 5-30: Spurious Conducted RF Emissions
802.11g, Channel 11, 6 Mbps**

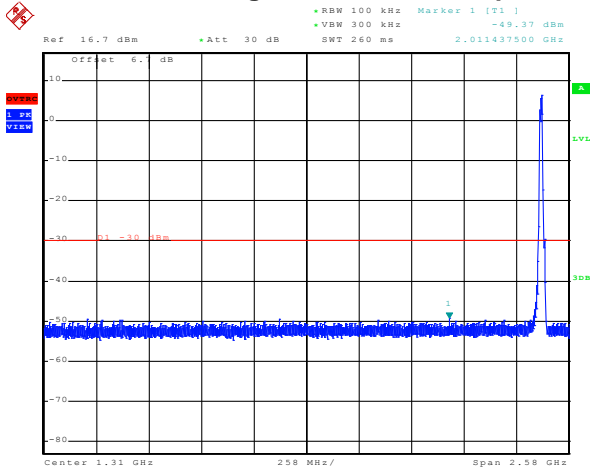

Date: 19.NOV.2012 11:59:38

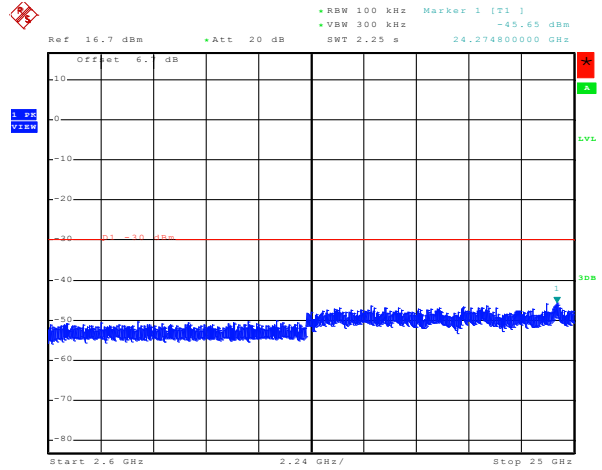


Date: 16.NOV.2012 11:26:47


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11b/g/n RF Conducted Emission Test Results cont'd

**Figure 5-31: Spurious Conducted RF Emissions
802.11n, Channel 1, MCS 0**

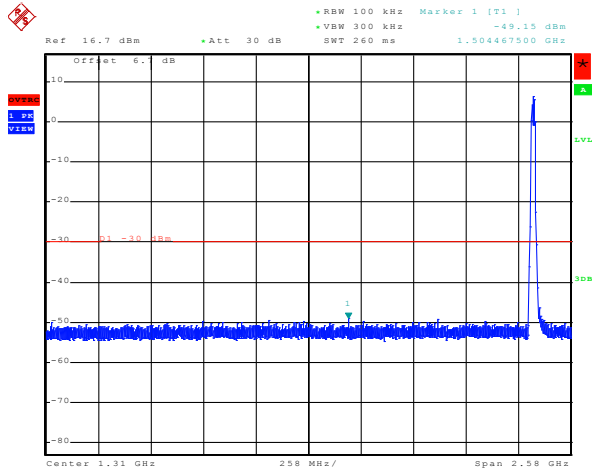


Date: 19.NOV.2012 11:42:48

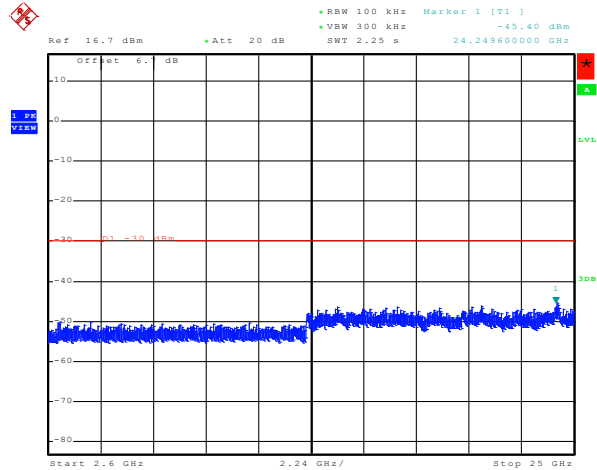


Date: 16.NOV.2012 11:31:50


**Figure 5-32: Spurious Conducted RF Emissions
802.11n, Channel 6, MCS 0**

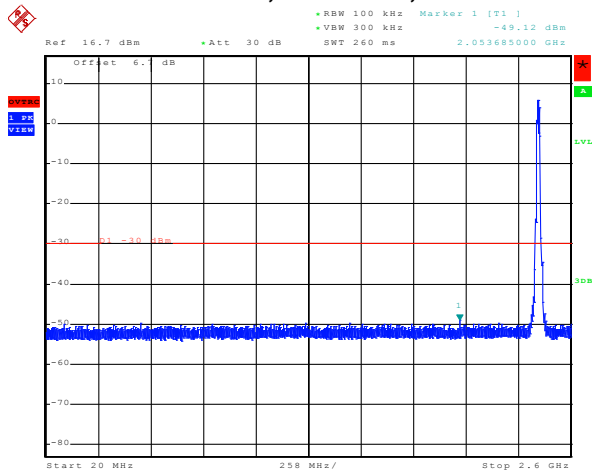

Date: 19.NOV.2012 11:55:06

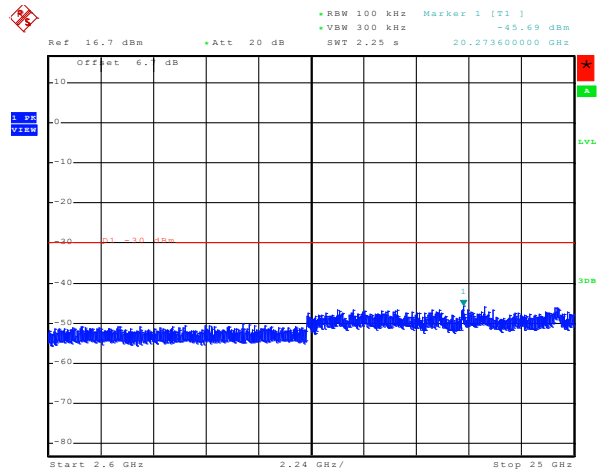


Date: 16.NOV.2012 11:36:54


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 5	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11b/g/n RF Conducted Emission Test Results cont'd


**Figure 5-33: Spurious Conducted RF Emissions
802.11n, Channel 11, MCS 0**

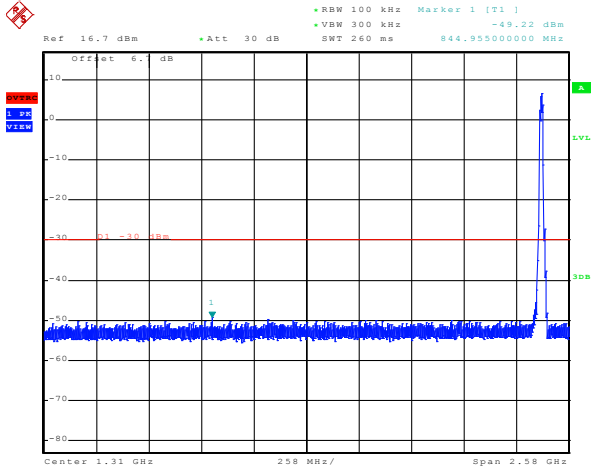


Date: 19.NOV.2012 12:01:07

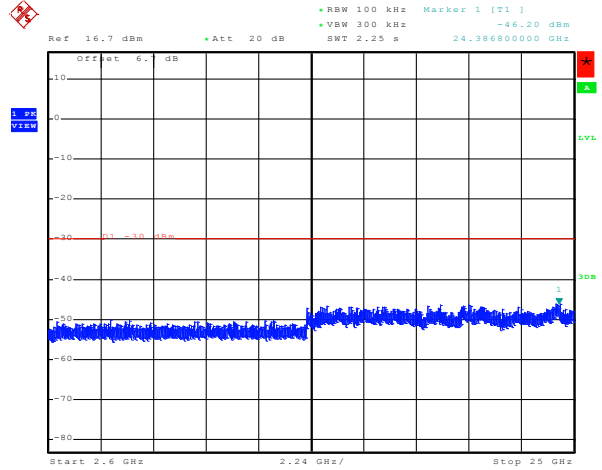

Date: 16.NOV.2012 11:41:57

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

APPENDIX 6 – 802.11a/n CONDUCTED EMISSIONS TEST DATA/PLOTS


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11a RF Conducted Emission Test Results cont'd

6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a) (2) and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157, 161 and 165 were measured at 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11a mode.


Channel	Data Rate	Limit (kHz)	Measured Level (MHz)
36	6 Mbps	>= 500	15.32
	24 Mbps	>= 500	16.51
	54 Mbps	>= 500	16.52
44	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	16.52
	54 Mbps	>= 500	16.52
48	6 Mbps	>= 500	15.34
	24 Mbps	>= 500	16.52
	54 Mbps	>= 500	16.52
52	6 Mbps	>= 500	15.32
	24 Mbps	>= 500	16.53
	54 Mbps	>= 500	16.54
60	6 Mbps	>= 500	15.31
	24 Mbps	>= 500	16.51
	54 Mbps	>= 500	16.52
64	6 Mbps	>= 500	15.31
	24 Mbps	>= 500	16.52
	54 Mbps	>= 500	16.52
100	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	16.52
	54 Mbps	>= 500	16.53

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd

Channel	Data Rate	Limit (kHz)	Measured Level (MHz)
140	6 Mbps	>= 500	15.31
	24 Mbps	>= 500	16.53
	54 Mbps	>= 500	16.53
149	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	16.53
	54 Mbps	>= 500	16.52
157	6 Mbps	>= 500	15.34
	24 Mbps	>= 500	16.53
	54 Mbps	>= 500	16.53
161	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	16.52
	54 Mbps	>= 500	16.53
165	6 Mbps	>= 500	15.34
	24 Mbps	>= 500	16.53
	54 Mbps	>= 500	16.53

See figures 6-1 to 6-12 for the plots of the 6 dB bandwidth measurements for Channel 36, 44, 48, 52, 60, 64, 100, 140, 149, 157, 161 and 165 at 6 Mbps each for 802.11a mode.


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11n RF Conducted Emission Test Results

6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a) (2) and RSS-210. Channels 36, 64 and 165 were measured at MCS 0, MCS 4 and MCS 7 each for 802.11n mode.


Channel	Data Rate	Limit (kHz)	Measured Level (MHz)
36	6 Mbps	>= 500	15.13
	24 Mbps	>= 500	17.72
	54 Mbps	>= 500	17.75
44	6 Mbps	>= 500	15.13
	24 Mbps	>= 500	17.73
	54 Mbps	>= 500	17.73
48	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	17.74
	54 Mbps	>= 500	17.76
52	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	17.72
	54 Mbps	>= 500	17.72
60	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	17.72
	54 Mbps	>= 500	17.73
64	6 Mbps	>= 500	15.14
	24 Mbps	>= 500	17.74
	54 Mbps	>= 500	17.75
100	6 Mbps	>= 500	15.12
	24 Mbps	>= 500	15.71
	54 Mbps	>= 500	15.72

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11n RF Conducted Emission Test Results cont'd

Channel	Data Rate	Limit (kHz)	Measured Level (MHz)
140	6 Mbps	>= 500	15.12
	24 Mbps	>= 500	17.71
	54 Mbps	>= 500	17.70
149	6 Mbps	>= 500	15.16
	24 Mbps	>= 500	17.71
	54 Mbps	>= 500	17.71
157	6 Mbps	>= 500	15.31
	24 Mbps	>= 500	17.72
	54 Mbps	>= 500	17.74
161	6 Mbps	>= 500	15.12
	24 Mbps	>= 500	17.70
	54 Mbps	>= 500	17.71
165	6 Mbps	>= 500	15.33
	24 Mbps	>= 500	17.72
	54 Mbps	>= 500	17.72

See figures 6-13 to 6-15 for the plots of the 6 dB bandwidth measurements for Channel 36, 64 and 165 at MCS 0 each for 802.11n mode.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd

Figure 6-1: 6 dB Bandwidth
802.11a, Channel 36, 6 Mbps

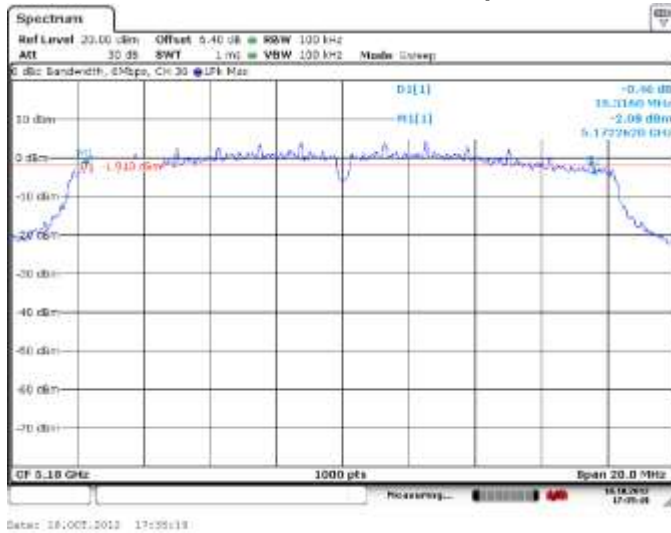


Figure 6-2: 6 dB Bandwidth
802.11a, Channel 44, 6 Mbps

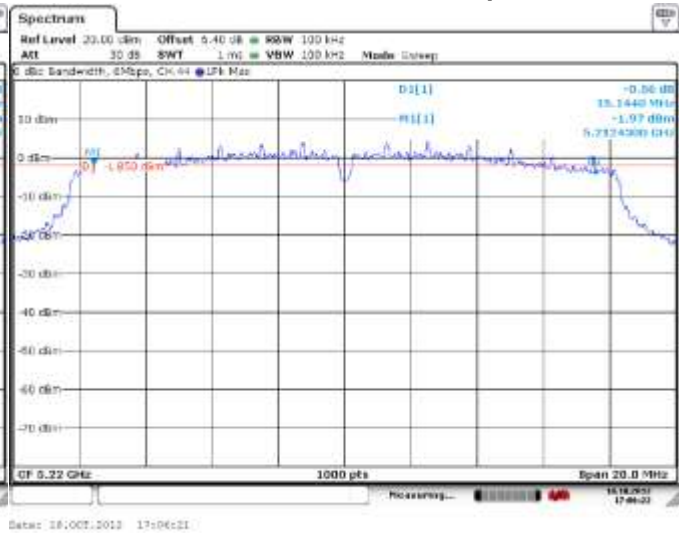


Figure 6-3: 6 dB Bandwidth
802.11a, Channel 48, 6 Mbps






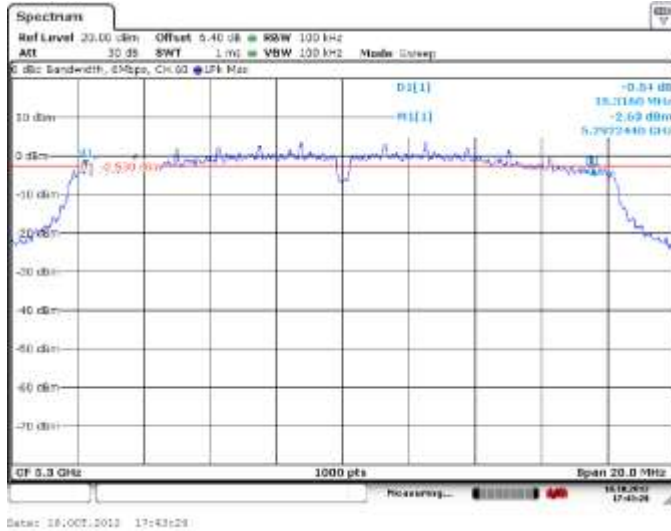
Figure 6-4: 6 dB Bandwidth
802.11a, Channel 52, 6 Mbps




	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd

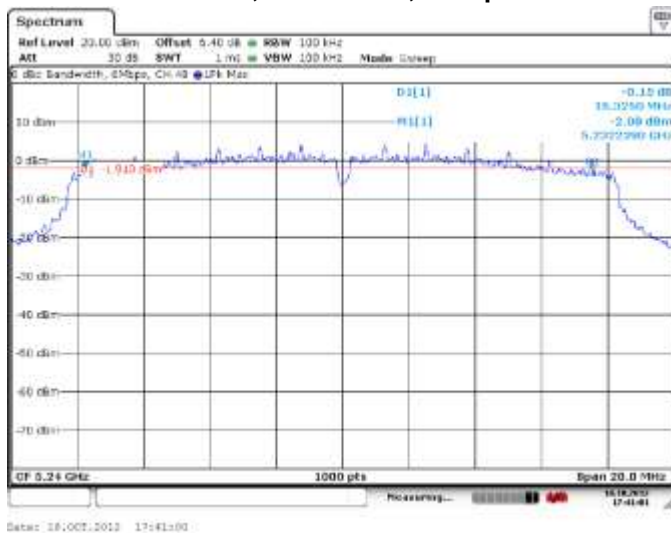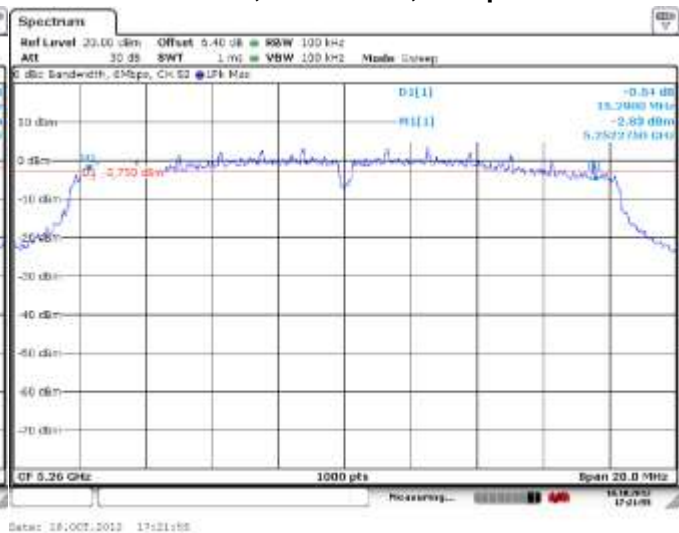
**Figure 6-5: 6 dB Bandwidth
802.11a, Channel 60, 6 Mbps**




**Figure 6-6: 6 dB Bandwidth
802.11a, Channel 64, 6 Mbps**

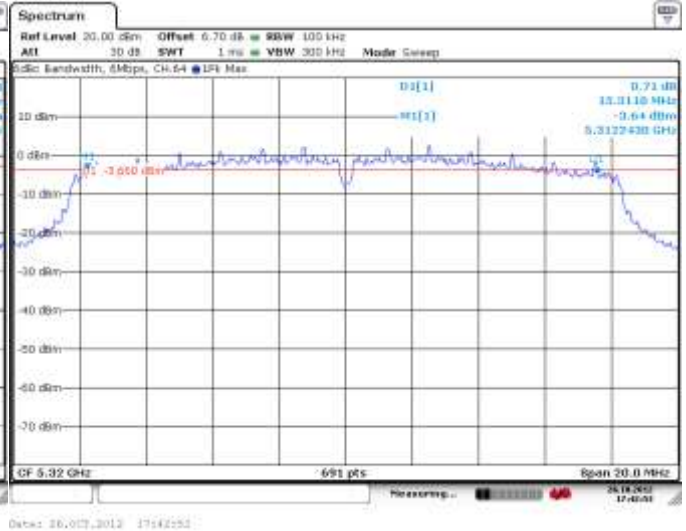


**Figure 6-7: 6 dB Bandwidth
802.11a, Channel 100, 6 Mbps**

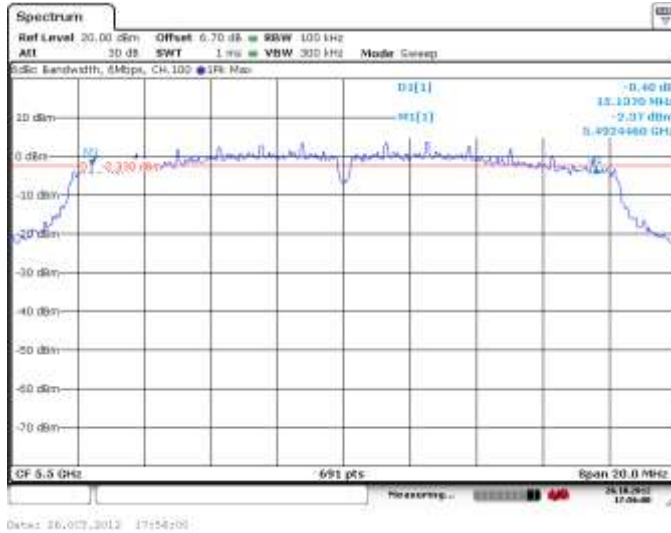

**Figure 6-8: 6 dB Bandwidth
802.11a, Channel 140, 6 Mbps**

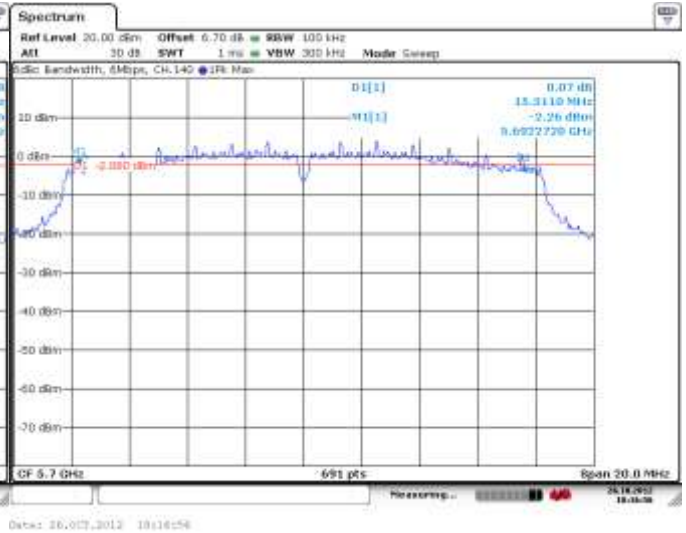

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd

Figure 6-9: 6 dB Bandwidth
802.11a, Channel 149, 6 Mbps

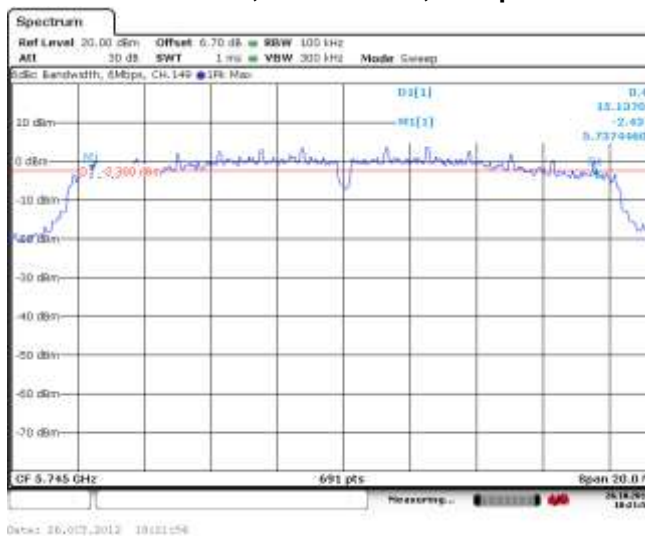


Figure 6-10: 6 dB Bandwidth
802.11a, Channel 157, 6 Mbps

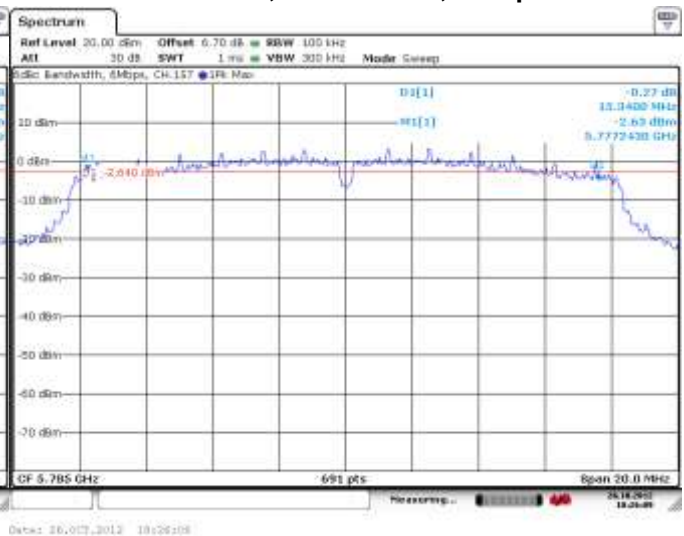


Figure 6-11: 6 dB Bandwidth
802.11a, Channel 161, 6 Mbps


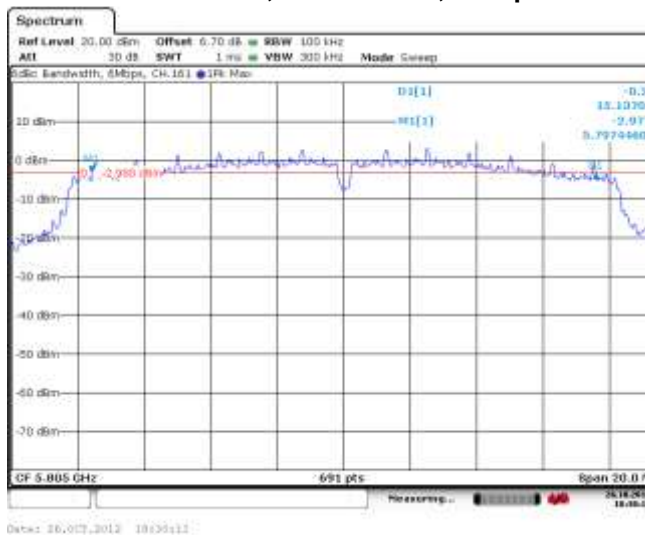



Figure 6-12: 6 dB Bandwidth
802.11a, Channel 165, 6 Mbps

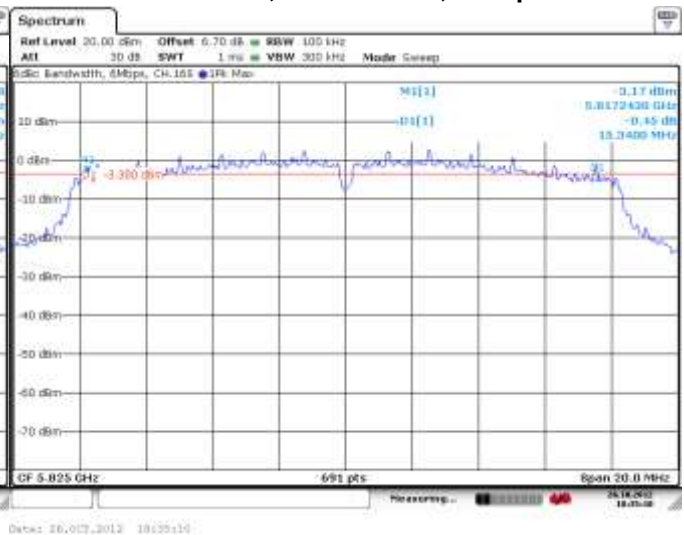

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012

802.11n RF Conducted Emission Test Results

Figure 6-13: 6 dB Bandwidth
802.11n, Channel 36, MCS 0

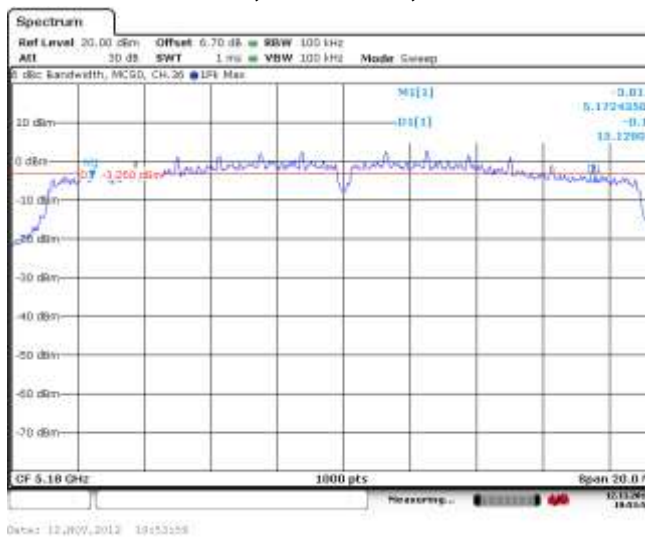


Figure 6-14: 6 dB Bandwidth
802.11n, Channel 44, MCS 0

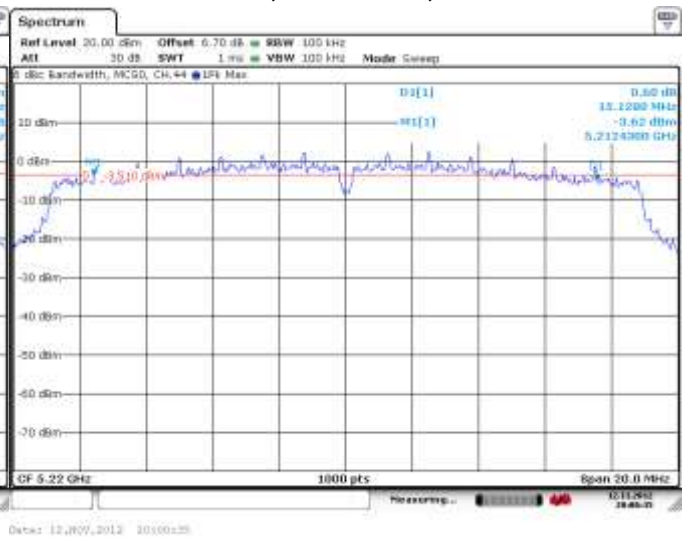


Figure 6-15: 6 dB Bandwidth
802.11n, Channel 48, MCS 0


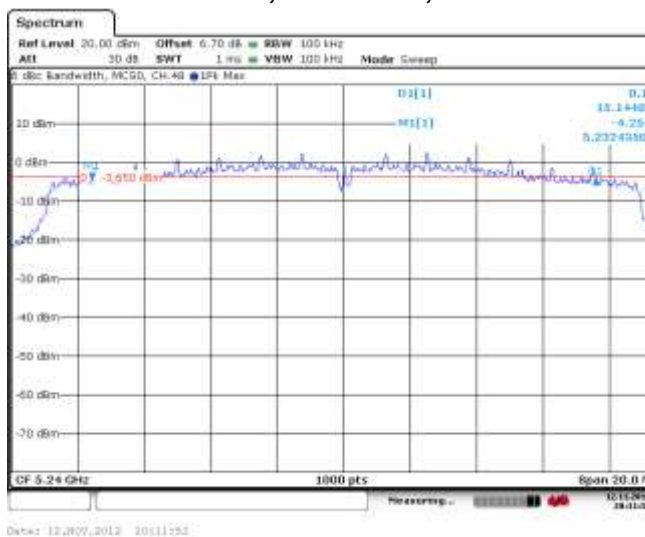



Figure 6-16: 6 dB Bandwidth
802.11n, Channel 52, MCS 0

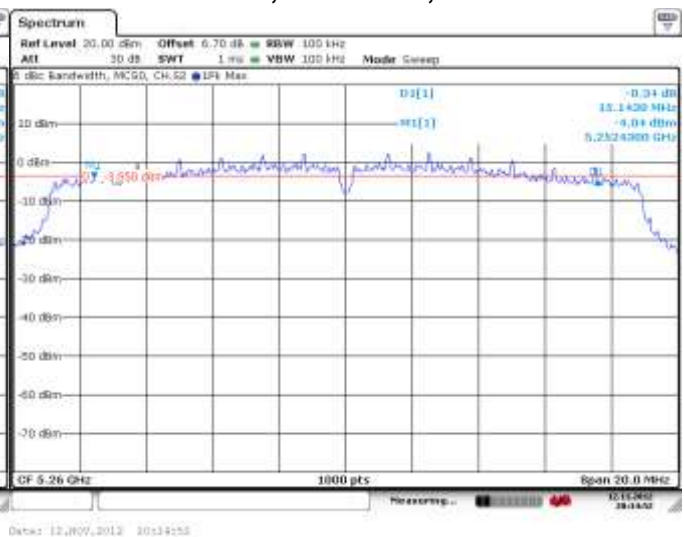

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11n RF Conducted Emission Test Results cont'd

Figure 6-17: 6 dB Bandwidth
802.11n, Channel 60, MCS 0

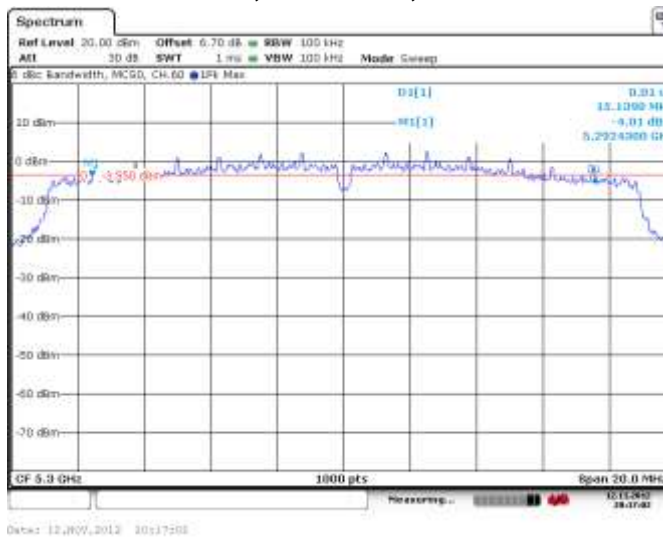


Figure 6-18: 6 dB Bandwidth
802.11n, Channel 64, MCS 0


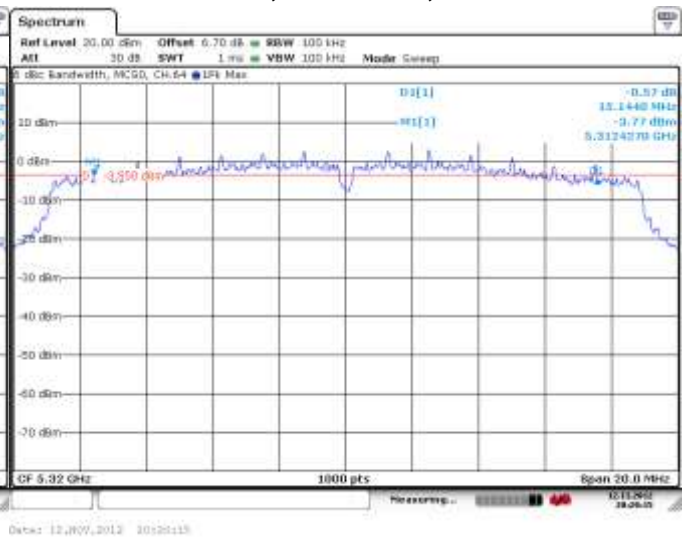


Figure 6-19: 6 dB Bandwidth
802.11n, Channel 100, MCS 0



Figure 6-20: 6 dB Bandwidth
802.11n, Channel 140, MCS 0

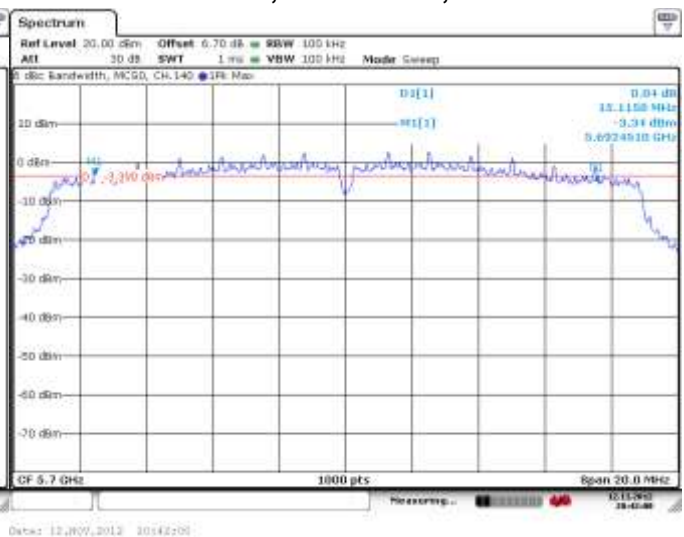

Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11n RF Conducted Emission Test Results cont'd

Figure 6-21: 6 dB Bandwidth
 802.11n, Channel 149, MCS 0

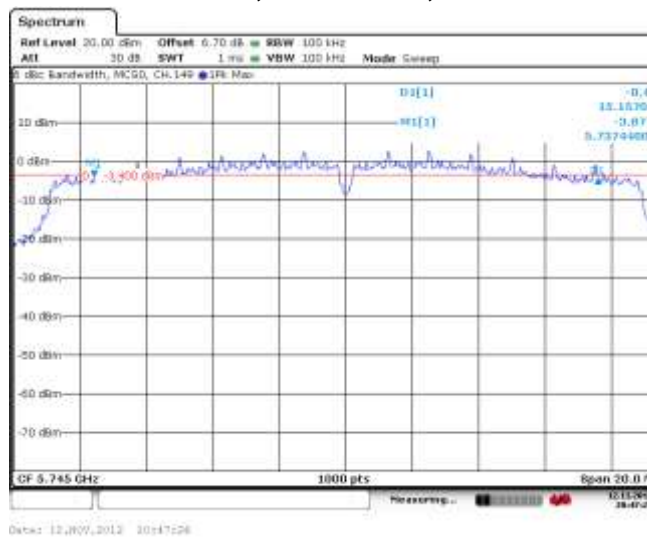


Figure 6-22: 6 dB Bandwidth
 802.11n, Channel 157, MCS 0

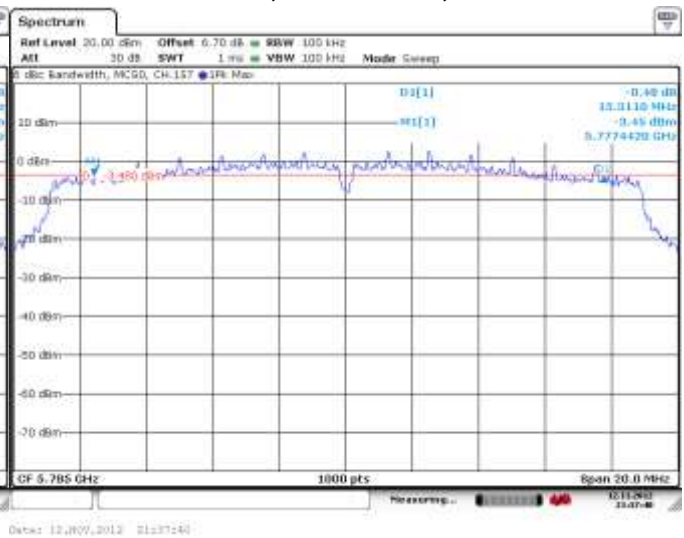


Figure 6-23: 6 dB Bandwidth
 802.11n, Channel 161, MCS 0


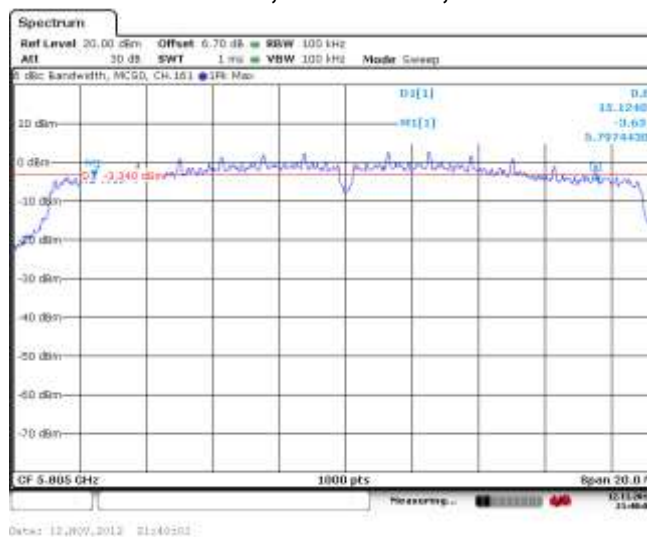



Figure 6-24: 6 dB Bandwidth
 802.11n, Channel 165, MCS 0

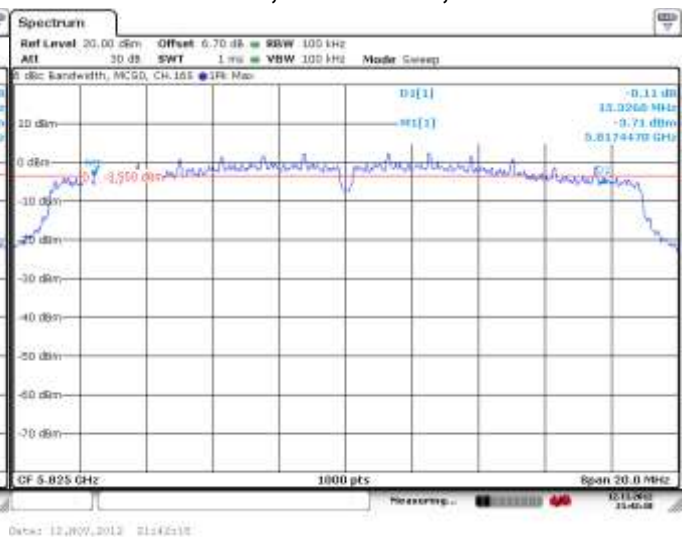

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd

Maximum Conducted Output Power


The EUT met the requirements of the maximum conducted output power of class 2 as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157, 161 and 165 were measured for 802.11a mode using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 8.9 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (mW)
36	6 Mbps	< 1.00	15.02	31.77
	24 Mbps	< 1.00	13.17	20.75
	54 Mbps	< 1.00	11.48	14.06
44	6 Mbps	< 1.00	15.12	32.51
	24 Mbps	< 1.00	13.11	20.46
	54 Mbps	< 1.00	11.41	13.84
48	6 Mbps	< 1.00	15.13	32.58
	24 Mbps	< 1.00	13.20	20.89
	54 Mbps	< 1.00	11.46	14.00
52	6 Mbps	< 1.00	14.29	26.85
	24 Mbps	< 1.00	13.37	21.73
	54 Mbps	< 1.00	12.60	18.20
60	6 Mbps	< 1.00	14.54	28.44
	24 Mbps	< 1.00	13.48	22.28
	54 Mbps	< 1.00	11.98	15.78
64	6 Mbps	< 1.00	14.77	29.99
	24 Mbps	< 1.00	13.59	22.86
	54 Mbps	< 1.00	12.18	16.52
100	6 Mbps	< 1.00	15.33	34.12
	24 Mbps	< 1.00	14.13	25.88
	54 Mbps	< 1.00	12.70	18.62

Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW
--	--	---

802.11a RF Conducted Emission Test Results cont'd

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (mW)
140	6 Mbps	< 1.00	15.00	31.62
	24 Mbps	< 1.00	13.04	20.14
	54 Mbps	< 1.00	12.13	16.33
149	6 Mbps	< 1.00	14.61	28.91
	24 Mbps	< 1.00	12.82	19.14
	54 Mbps	< 1.00	11.22	13.24
157	6 Mbps	< 1.00	14.20	26.30
	24 Mbps	< 1.00	12.42	17.46
	54 Mbps	< 1.00	10.76	11.91
161	6 Mbps	< 1.00	13.93	24.72
	24 Mbps	< 1.00	11.85	15.31
	54 Mbps	< 1.00	10.42	11.02
165	6 Mbps	< 1.00	13.22	20.99
	24 Mbps	< 1.00	11.54	14.26
	54 Mbps	< 1.00	10.21	10.50


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11n RF Conducted Emission Test Results

Maximum Conducted Output Power


The EUT met the requirements of the maximum conducted output power of class 2 as per 47 CFR 15.407 and RSS-210. Channels 36, 64 and 165 were measured for 802.11n mode using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 8.9 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (mW)
36	6 Mbps	< 1.00	13.68	23.35
	24 Mbps	< 1.00	12.92	19.58
	54 Mbps	< 1.00	11.64	14.60
44	6 Mbps	< 1.00	13.57	22.73
	24 Mbps	< 1.00	12.81	19.12
	54 Mbps	< 1.00	11.50	14.13
48	6 Mbps	< 1.00	13.59	22.84
	24 Mbps	< 1.00	12.81	19.10
	54 Mbps	< 1.00	11.53	14.23
52	6 Mbps	< 1.00	13.66	23.25
	24 Mbps	< 1.00	12.96	19.75
	54 Mbps	< 1.00	11.61	14.50
60	6 Mbps	< 1.00	13.73	23.59
	24 Mbps	< 1.00	12.97	19.80
	54 Mbps	< 1.00	11.57	14.36
64	6 Mbps	< 1.00	13.76	23.75
	24 Mbps	< 1.00	13.00	19.94
	54 Mbps	< 1.00	11.63	14.54
100	6 Mbps	< 1.00	13.59	22.86
	24 Mbps	< 1.00	12.86	19.32
	54 Mbps	< 1.00	11.43	13.90

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11n RF Conducted Emission Test Results cont'd

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (mW)
140	6 Mbps	< 1.00	13.27	21.24
	24 Mbps	< 1.00	12.54	17.93
	54 Mbps	< 1.00	11.18	13.13
149	6 Mbps	< 1.00	13.23	21.05
	24 Mbps	< 1.00	12.39	17.33
	54 Mbps	< 1.00	11.24	13.31
157	6 Mbps	< 1.00	13.13	20.54
	24 Mbps	< 1.00	12.44	17.55
	54 Mbps	< 1.00	10.99	12.56
161	6 Mbps	< 1.00	13.01	19.99
	24 Mbps	< 1.00	12.33	17.10
	54 Mbps	< 1.00	11.00	12.59
165	6 Mbps	< 1.00	12.91	19.56
	24 Mbps	< 1.00	12.11	16.24
	54 Mbps	< 1.00	10.87	12.22

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


802.11a RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.407 and RSS-210. Channels 36, 48, 52, 64, 100, 149, 161 and 165 were measured at 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11a mode.

Channel	Data Rate	Limit (dBc)	Measured Level (dBc)	Margin (dBc)
36	6 Mbps	< -20	-47	-27.00
	24 Mbps	< -20	-47.97	-27.97
	54 Mbps	< -20	-47.84	-27.84
64	6 Mbps	< -20	-49.08	-29.08
	24 Mbps	< -20	-47.36	-27.36
	54 Mbps	< -20	-49.78	-29.78
100	6 Mbps	< -20	-49.99	-29.99
	24 Mbps	< -20	-46.18	-26.18
	54 Mbps	< -20	-47.48	-27.48
140	6 Mbps	< -20	-45.04	-25.04
	24 Mbps	< -20	-44.56	-24.56
	54 Mbps	< -20	-48.80	-28.80
149	6 Mbps	< -20	-40.11	-20.11
	24 Mbps	< -20	-39.41	-19.41
	54 Mbps	< -20	-41.65	-21.65
165	6 Mbps	< -20	-25.38	-5.38
	24 Mbps	< -20	-24.92	-4.92
	54 Mbps	< -20	-24.07	-4.07

See figures 6-16 to 6-21 for the plots of the band edge compliance measurements for Channel 36, 64, 100, 140, 149 and 165 at 6 Mbps each for 802.11a mode.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


802.11n RF Conducted Emission Test Results

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.407 and RSS-210. Channels 36, 64 and 165 were measured at MCS 0, MCS 4 and MCS 7 each for 802.11n mode.

Channel	Data Rate	Limit (dBc)	Measured Level (dBc)	Margin (dBc)
36	6 Mbps	< -20	-51.19	-31.19
	24 Mbps	< -20	-51.24	-31.24
	54 Mbps	< -20	-50.96	-30.96
64	6 Mbps	< -20	-51.00	-31.00
	24 Mbps	< -20	-51.16	-31.16
	54 Mbps	< -20	-51.19	-31.19
100	6 Mbps	< -20	-50.81	-30.81
	24 Mbps	< -20	-51.03	-31.03
	54 Mbps	< -20	-50.93	-30.93
140	6 Mbps	< -20	-50.79	-30.79
	24 Mbps	< -20	-50.86	-30.86
	54 Mbps	< -20	-50.79	-30.79
149	6 Mbps	< -20	-46.31	-26.31
	24 Mbps	< -20	-46.87	-26.87
	54 Mbps	< -20	-46.54	-26.54
165	6 Mbps	< -20	-25.06	-5.06
	24 Mbps	< -20	-24.98	-4.98
	54 Mbps	< -20	-25.10	-5.10

See figures 6-22 to 6-27 for the plots of the band edge compliance measurements for Channel 36, 64, 100, 140, 149 and 165 at MCS 0 each for 802.11n mode.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012

802.11a RF Conducted Emission Test Results cont'd

Figure 6-16: Band Edge Compliance
802.11a, Channel 36, 6 Mbps

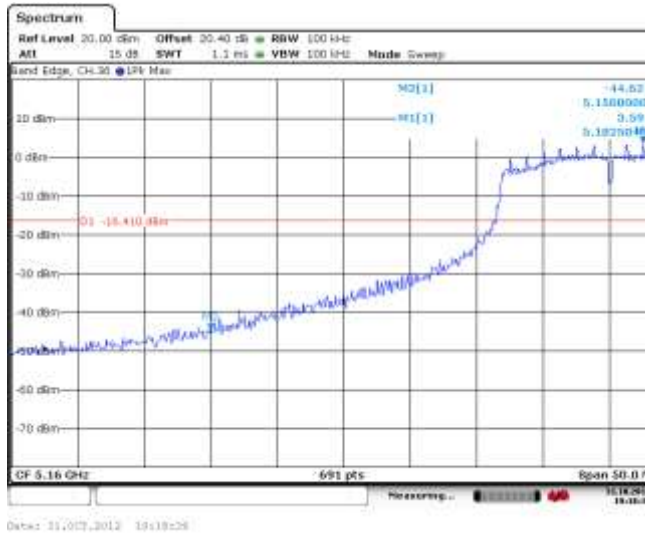


Figure 6-17: Band Edge Compliance
802.11a, Channel 64, 6 Mbps

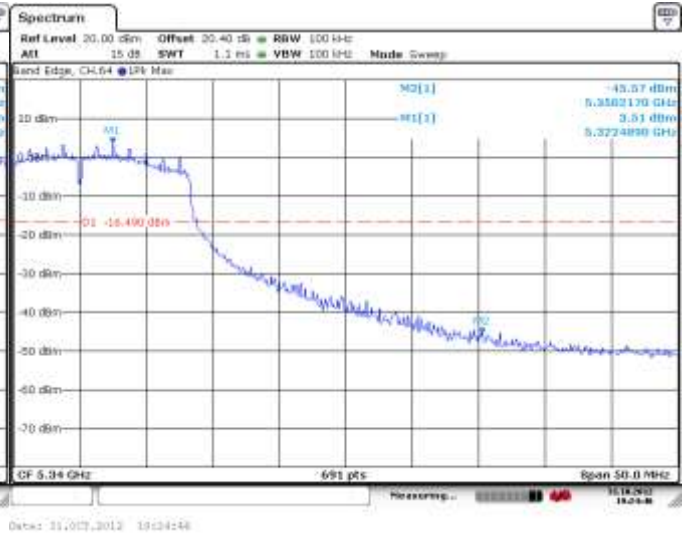


Figure 6-18: Band Edge Compliance
802.11a, Channel 100, 6 Mbps






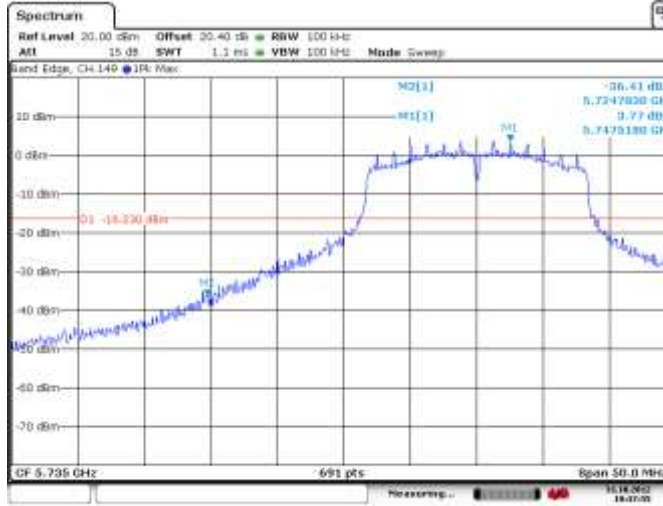
Figure 6-19: Band Edge Compliance
802.11a, Channel 140, 6 Mbps



	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


802.11a RF Conducted Emission Test Results cont'd

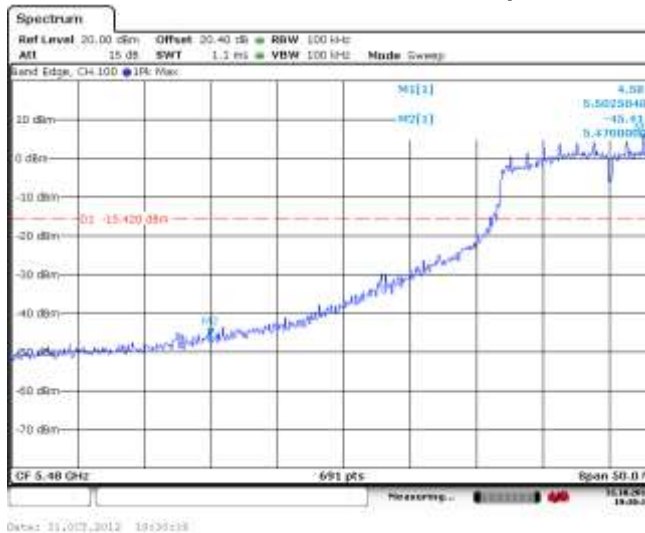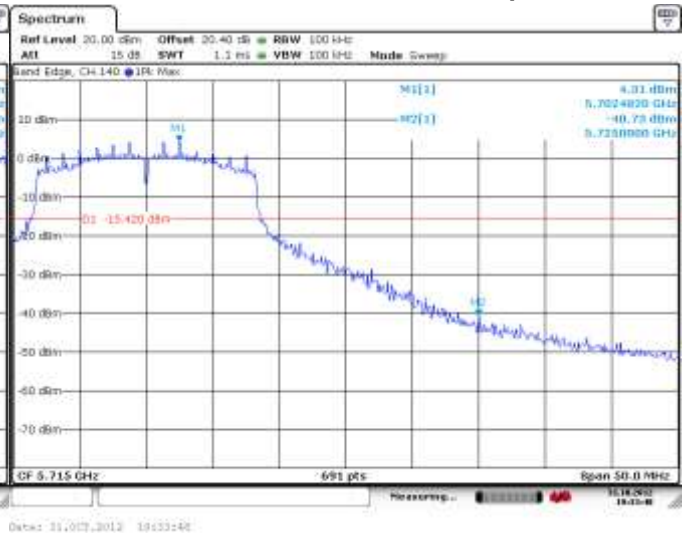Figure 6-20: Band Edge Compliance
802.11a, Channel 149, 6 Mbps




Date: 11/07/2012 19:37:54

Figure 6-21: Band Edge Compliance
802.11a, Channel 165, 6 Mbps

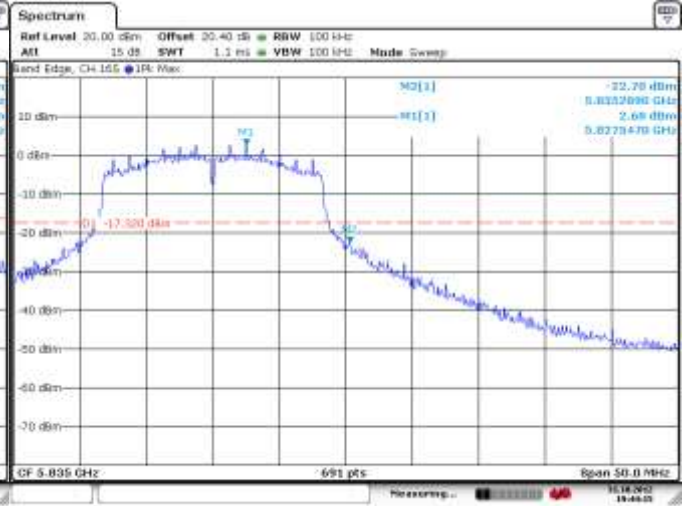

Date: 11/07/2012 19:44:15

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012

802.11n RF Conducted Emission Test Results

Figure 6-22: Band Edge Compliance
802.11n, Channel 36, MCS 0

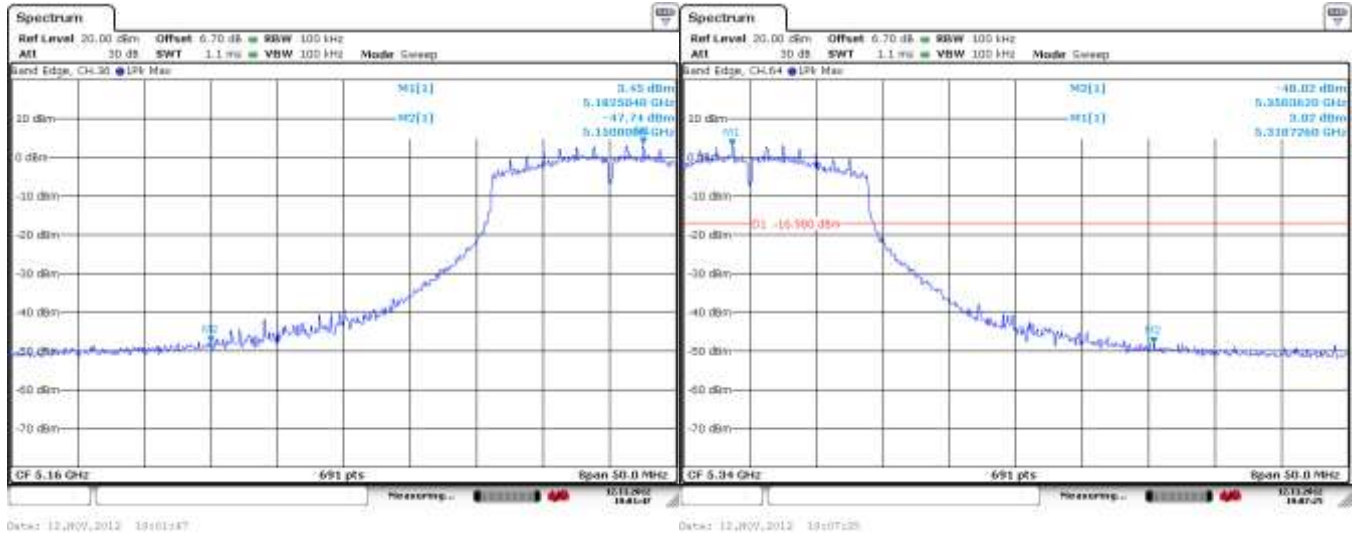


Figure 6-23: Band Edge Compliance
802.11n, Channel 64, MCS 0

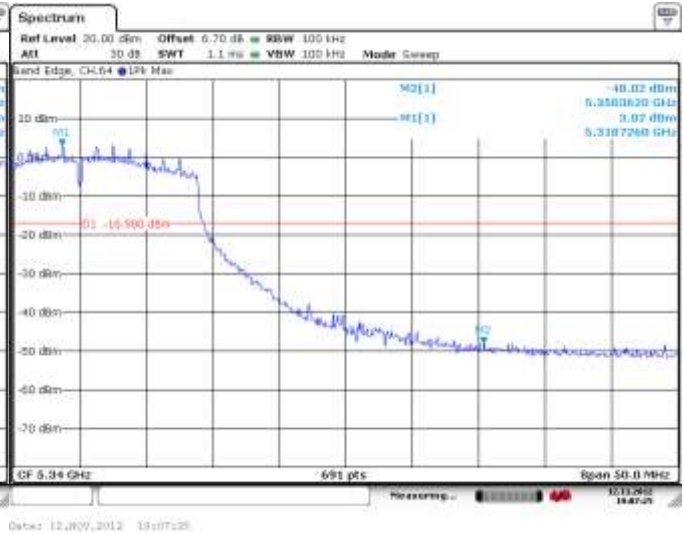


Figure 6-24: Band Edge Compliance
802.11n, Channel 100, MCS 0


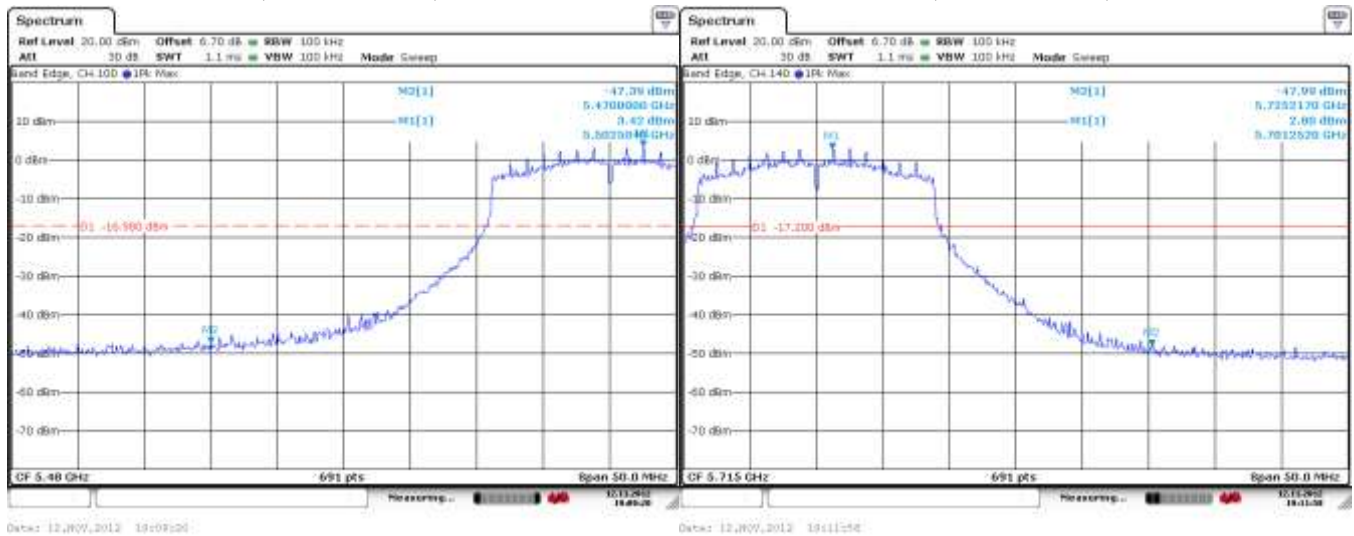


Figure 6-25: Band Edge Compliance
802.11n, Channel 140, MCS 0

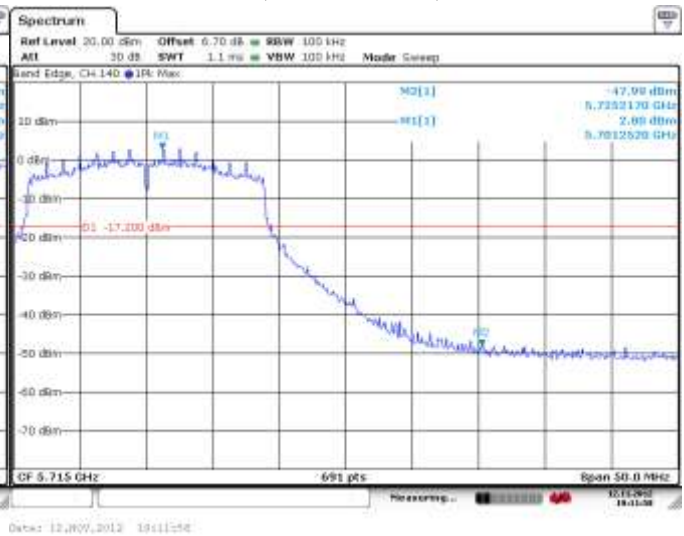


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Figure 6-26: Band Edge Compliance
802.11n, Channel 149, MCS 0


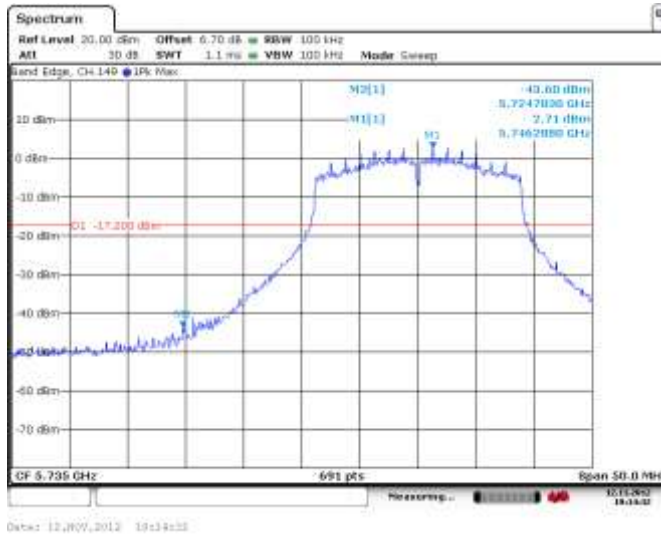



Figure 6-27: Band Edge Compliance
802.11n, Channel 165, MCS 0

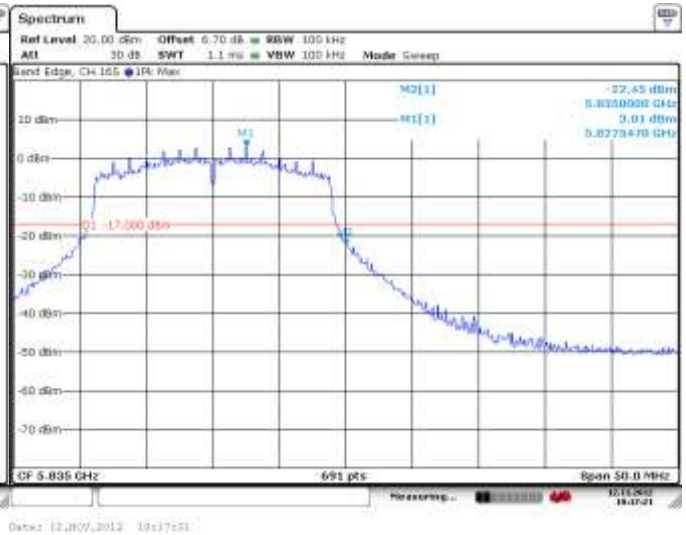


		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

802.11a RF Conducted Emission Test Results cont'd

Peak Power Spectral Density


The EUT met the requirements of the peak power spectral density as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 149, 157, 161 and 165 were measured at 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11a mode.

Channel	Data Rate	Limit (dBm)	Measured Level (dBm)	Margin (dBm)
36	6 Mbps	< 4.00	-8.91	-12.91
	24 Mbps	< 4.00	-12.10	-16.10
	54 Mbps	< 4.00	-13.96	-17.96
44	6 Mbps	< 4.00	-9.37	-13.37
	24 Mbps	< 4.00	-11.95	-15.95
	54 Mbps	< 4.00	-13.81	-17.81
48	6 Mbps	< 4.00	-9.51	-13.51
	24 Mbps	< 4.00	-11.73	-15.73
	54 Mbps	< 4.00	-13.71	-17.71
52	6 Mbps	< 11.00	-9.48	-20.48
	24 Mbps	< 11.00	-11.23	-22.23
	54 Mbps	< 11.00	-13.42	-24.42
60	6 Mbps	< 11.00	-9.51	-20.51
	24 Mbps	< 11.00	-11.08	-22.08
	54 Mbps	< 11.00	-13.11	-24.11
64	6 Mbps	< 11.00	-9.38	-20.38
	24 Mbps	< 11.00	-11.16	-22.16
	54 Mbps	< 11.00	-13.02	-24.02
100	6 Mbps	< 11.00	-8.56	-19.56
	24 Mbps	< 11.00	-10.39	-21.39
	54 Mbps	< 11.00	-12.57	-23.57
140	6 Mbps	< 11.00	-7.58	-18.58
	24 Mbps	< 11.00	-10.94	-21.94
	54 Mbps	< 11.00	-13.66	-24.66
149	6 Mbps	< 11.00	-8.15	-25.15
	24 Mbps	< 11.00	-11.78	-28.78
	54 Mbps	< 11.00	-13.77	-30.77
157	6 Mbps	< 11.00	-9.28	-26.28
	24 Mbps	< 11.00	-12.64	-29.64
	54 Mbps	< 11.00	-14.09	-31.09
161	6 Mbps	< 17.00	-10.23	-27.23
	24 Mbps	< 17.00	-12.47	-29.47

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	

	54 Mbps	< 17.00	-14.46	-31.46
165	6 Mbps	< 17.00	-9.35	-26.35
	24 Mbps	< 17.00	-13.00	-30.00
	54 Mbps	< 17.00	-14.81	-31.81

See figures 6-27 to 6-38 for the plots of the peak power spectral density for Channel 36, 44, 48, 52, 60, 64, 149, 157, 161 and 165 at 6 Mbps each for 802.11a mode.

		EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW	


802.11n RF Conducted Emission Test Results

Peak Power Spectral Density

The EUT met the requirements of the peak power spectral density as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 149, 157, 161 and 165 were measured at 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11a mode.


Channel	Data Rate	Limit (dBm)	Measured Level (dBm)	Margin (dBm)
36	6 Mbps	< 4.00	-10.56	-14.56
	24 Mbps	< 4.00	-11.24	-15.24
	54 Mbps	< 4.00	-11.95	-15.95
44	6 Mbps	< 4.00	-10.00	-14.00
	24 Mbps	< 4.00	-11.86	-15.86
	54 Mbps	< 4.00	-12.05	-16.05
48	6 Mbps	< 4.00	-10.59	-14.59
	24 Mbps	< 4.00	-11.99	-15.99
	54 Mbps	< 4.00	-12.16	-16.16
52	6 Mbps	< 11.00	-10.21	-21.21
	24 Mbps	< 11.00	-11.76	-22.76
	54 Mbps	< 11.00	-11.97	-22.97
60	6 Mbps	< 11.00	-10.26	-21.26
	24 Mbps	< 11.00	-11.76	-22.76
	54 Mbps	< 11.00	-11.98	-22.98
64	6 Mbps	< 11.00	-10.36	-21.36
	24 Mbps	< 11.00	-12.46	-23.46
	54 Mbps	< 11.00	-12.15	-23.15
149	6 Mbps	< 11.00	-10.24	-21.24
	24 Mbps	< 11.00	-11.20	-22.20
	54 Mbps	< 11.00	-11.64	-22.64
157	6 Mbps	< 11.00	-10.36	-21.36
	24 Mbps	< 11.00	-11.80	-22.80
	54 Mbps	< 11.00	-11.95	-22.95
161	6 Mbps	< 17.00	-9.88	-26.88
	24 Mbps	< 17.00	-12.10	-29.10
	54 Mbps	< 17.00	-12.11	-29.11
165	6 Mbps	< 17.00	-9.81	-26.81
	24 Mbps	< 17.00	-11.75	-28.75
	54 Mbps	< 17.00	-12.16	-29.16

See figures 6-39 to 6-46 for the plots of the peak power spectral density for Channel 36, 64 and 165 at MCS 0 each for 802.11n mode.


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd


**Figure 6-27: Peak Power Spectral Density
802.11a, Channel 36, 6 Mbps**

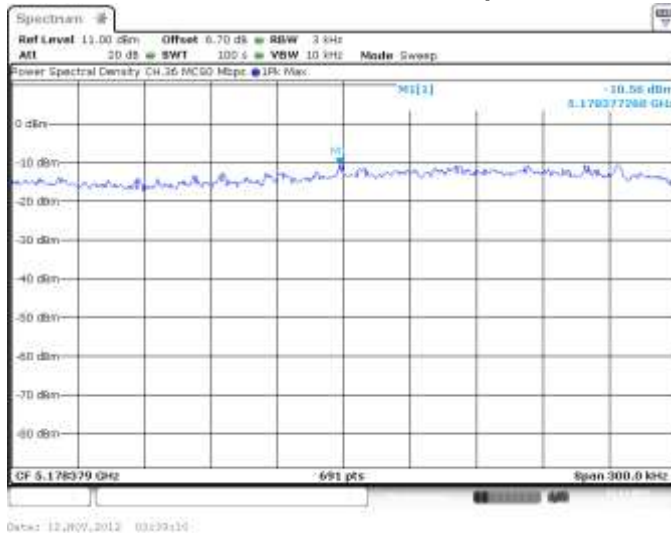


**Figure 6-28: Peak Power Spectral Density
802.11a, Channel 44, 6 Mbps**

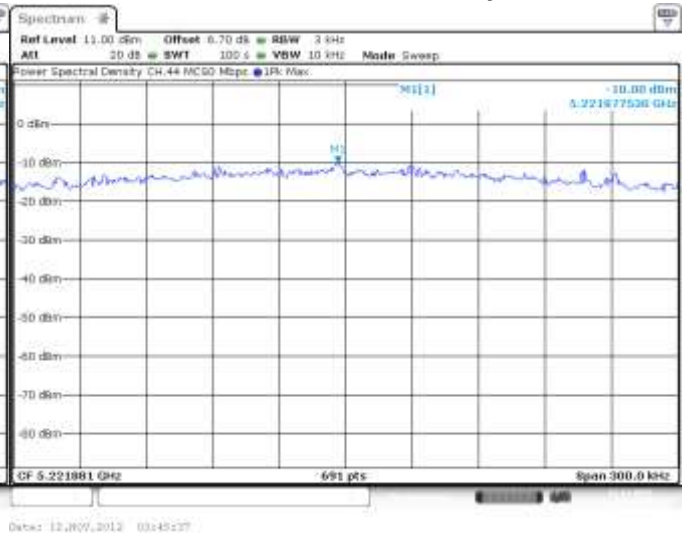


**Figure 6-29: Peak Power Spectral Density
802.11a, Channel 48, 6 Mbps**

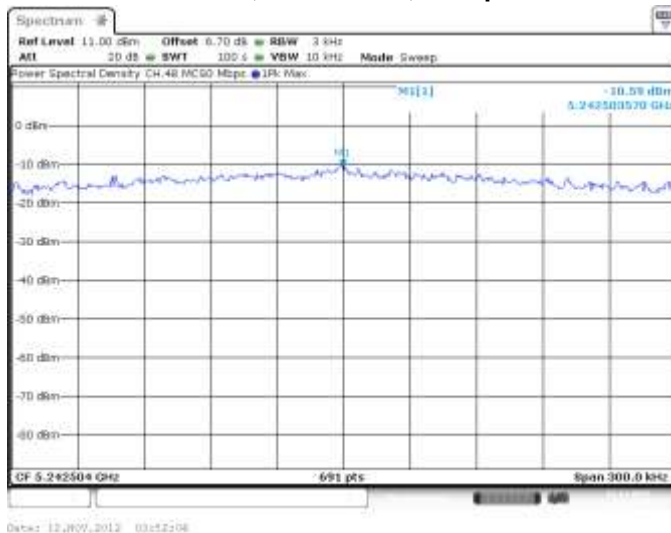


**Figure 6-30: Peak Power Spectral Density
802.11a, Channel 52, 6 Mbps**

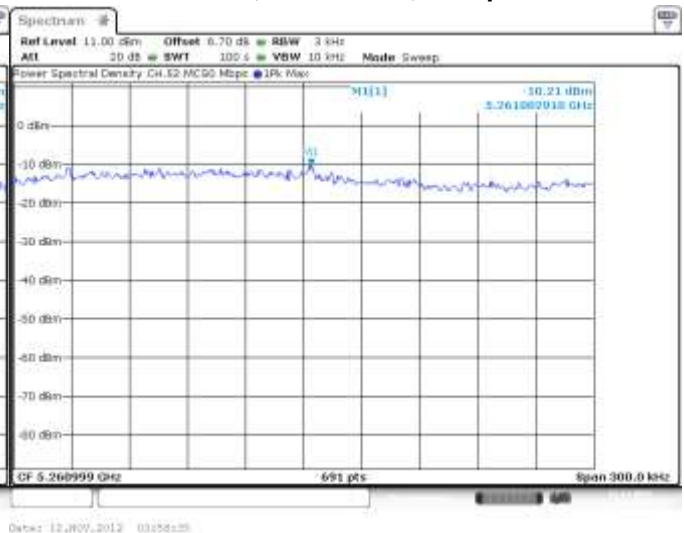


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd


**Figure 6-31: Peak Power Spectral Density
802.11a, Channel 60, 6 Mbps**

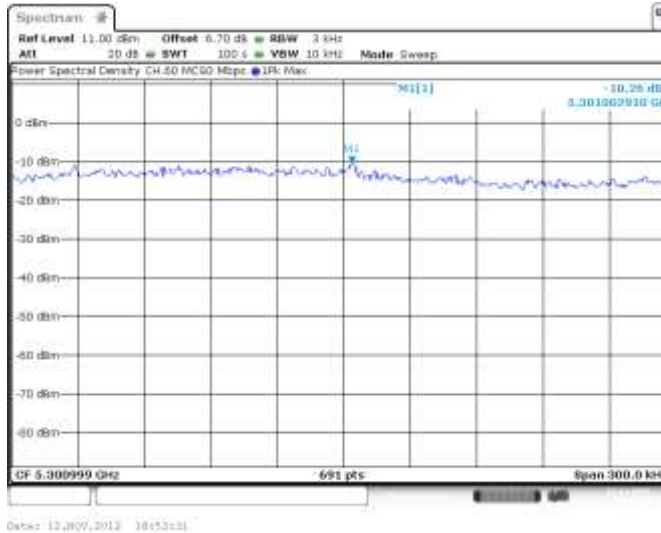


**Figure 6-32: Peak Power Spectral Density
802.11a, Channel 64, 6 Mbps**

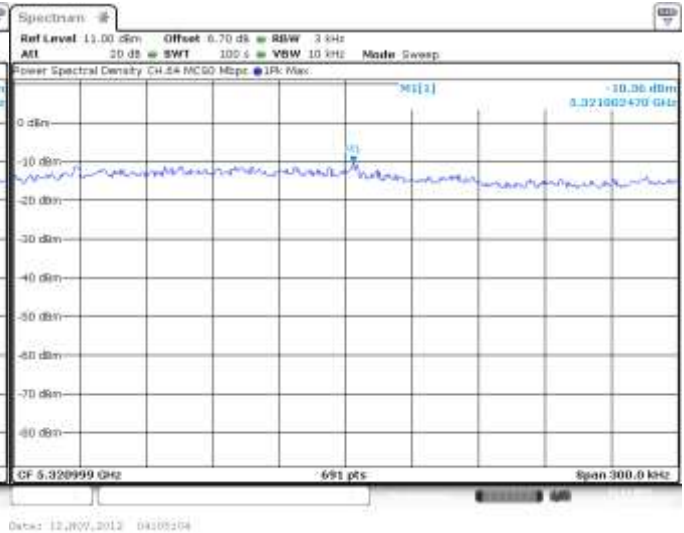


**Figure 6-33: Peak Power Spectral Density
802.11a, Channel 100, 6 Mbps**

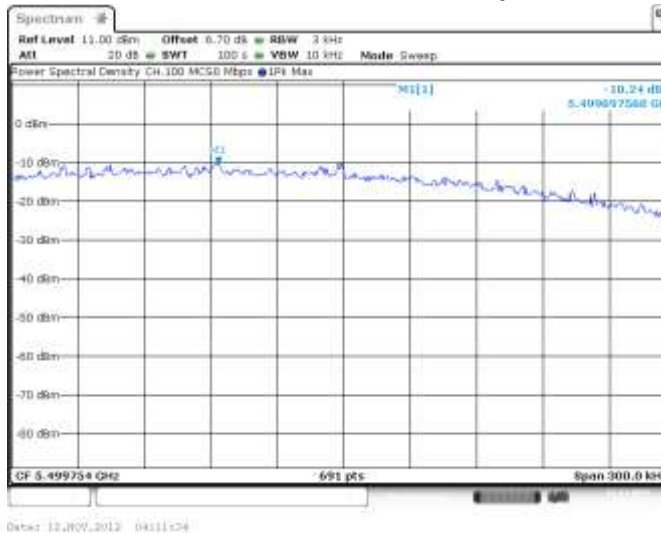


**Figure 6-34: Peak Power Spectral Density
802.11a, Channel 140, 6 Mbps**

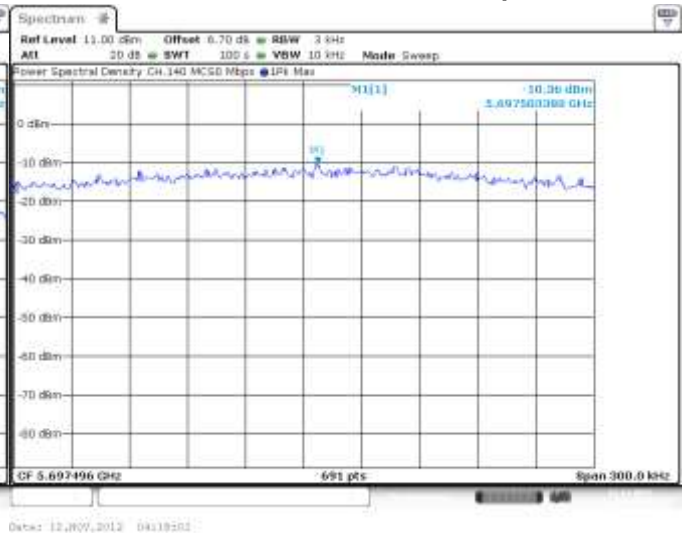


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd


**Figure 6-35: Peak Power Spectral Density
802.11a, Channel 149, 6 Mbps**

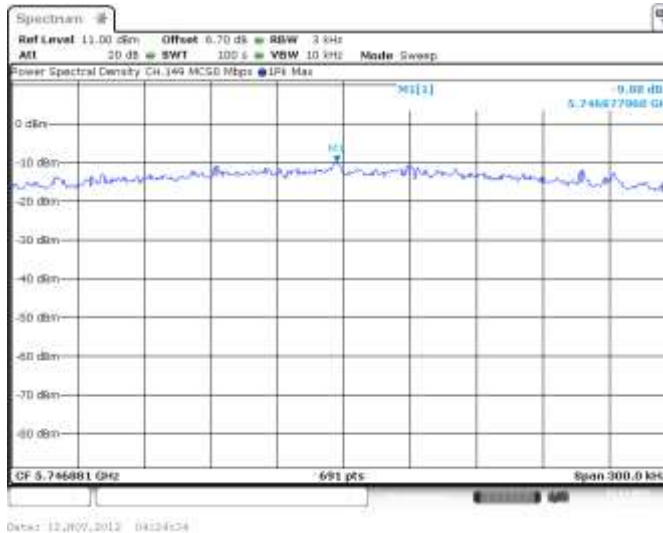


**Figure 6-36: Peak Power Spectral Density
802.11a, Channel 157, 6 Mbps**

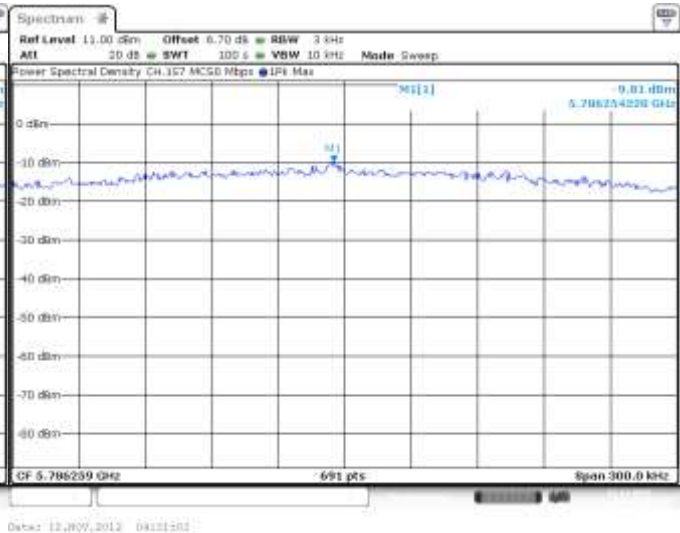


**Figure 6-37: Peak Power Spectral Density
802.11a, Channel 161, 6 Mbps**

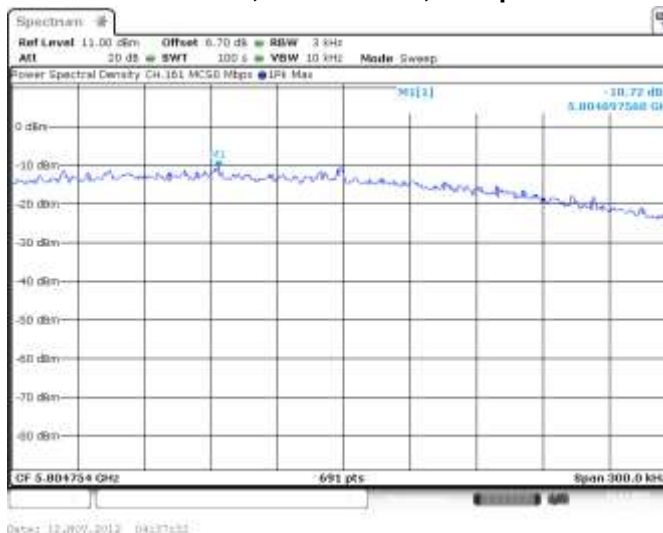


**Figure 6-38: Peak Power Spectral Density
802.11a, Channel 165, 6 Mbps**

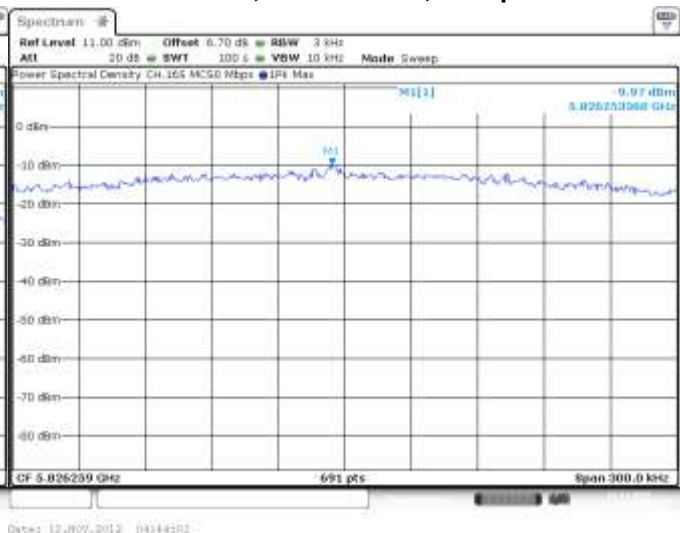


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012

802.11n RF Conducted Emission Test Results


**Figure 6-39: Peak Power Spectral Density
802.11n, Channel 36, MCS 0**

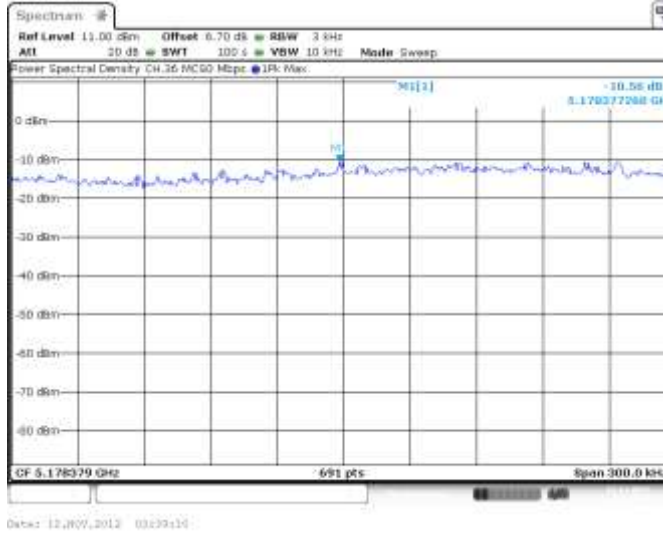


**Figure 6-40: Peak Power Spectral Density
802.11n, Channel 44, MCS 0**

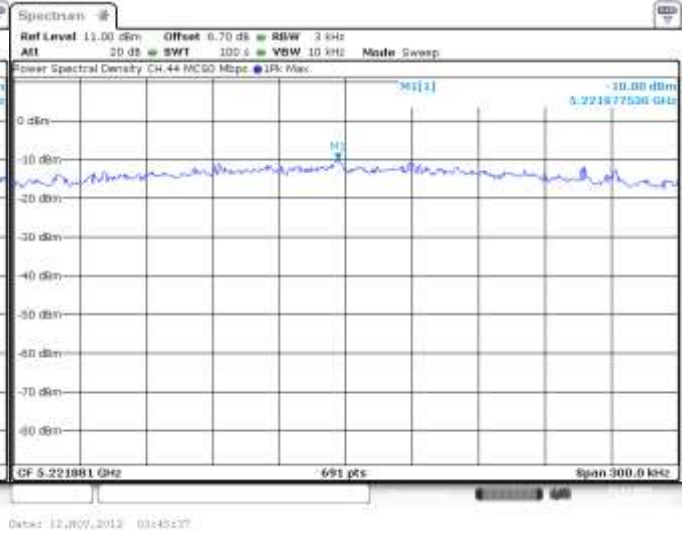


**Figure 6-41: Peak Power Spectral Density
802.11n, Channel 48, MCS 0**

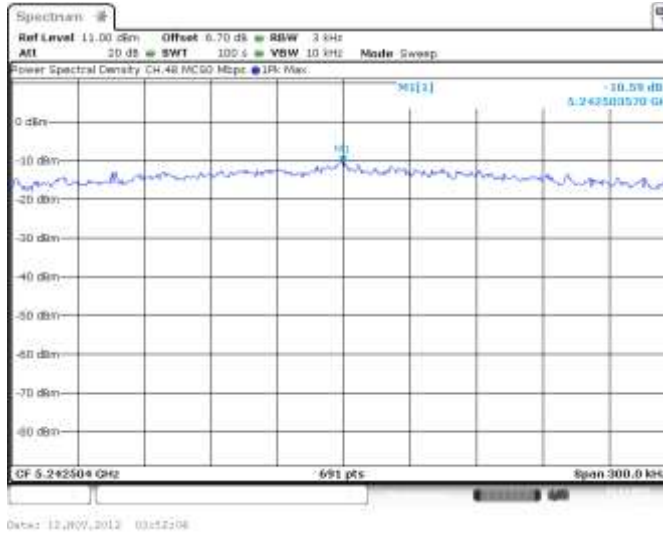


**Figure 6-42: Peak Power Spectral Density
802.11n, Channel 52, MCS 0**

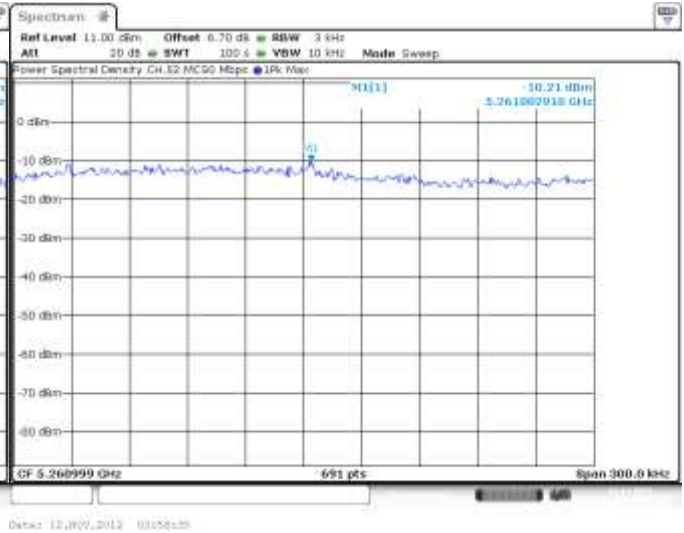


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
	Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012

802.11n RF Conducted Emission Test Results cont'd


**Figure 6-43: Peak Power Spectral Density
802.11n, Channel 60, MCS 0**

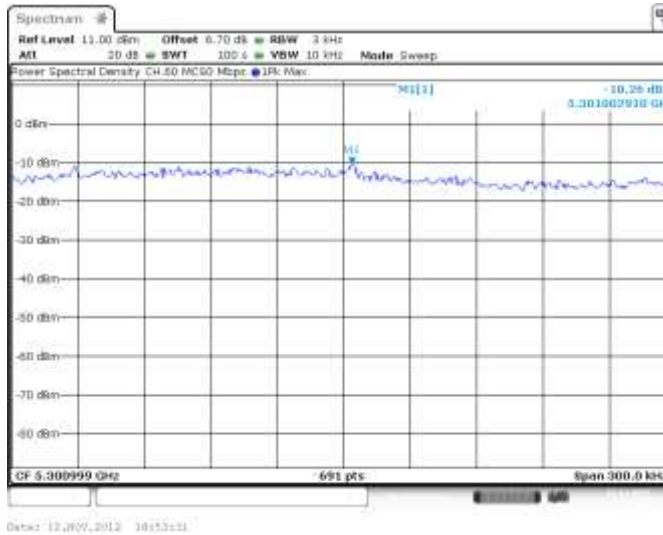


**Figure 6-44: Peak Power Spectral Density
802.11n, Channel 64, MCS 0**

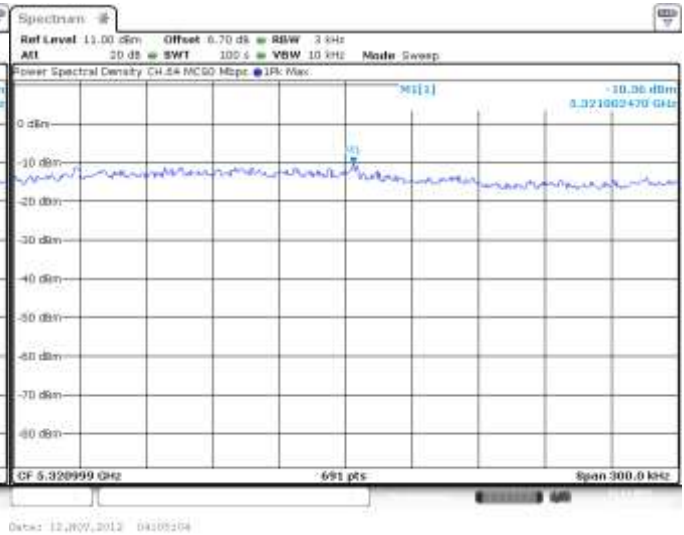


**Figure 6-45: Peak Power Spectral Density
802.11n, Channel 100, MCS 0**

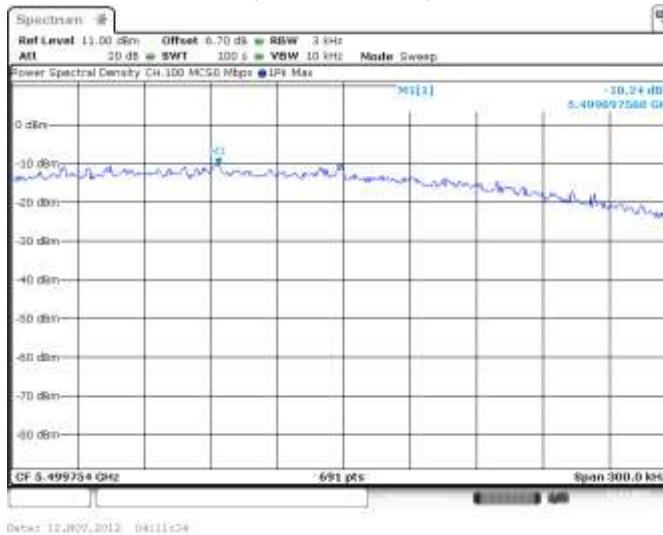


**Figure 6-46: Peak Power Spectral Density
802.11n, Channel 140, MCS 0**

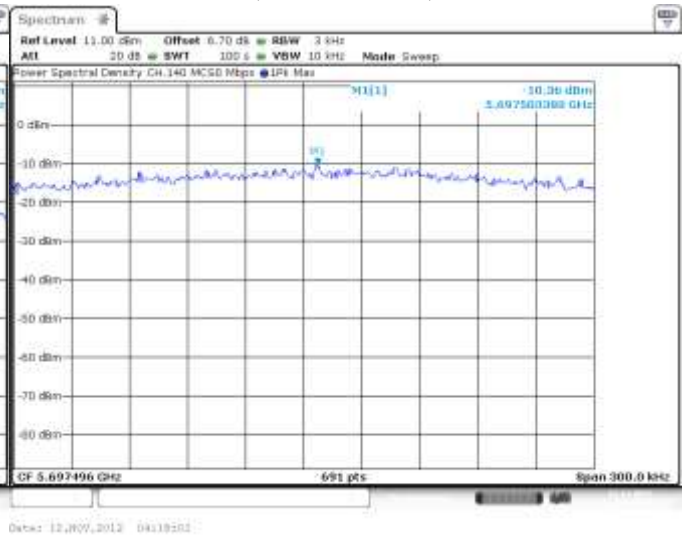


	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


**Figure 6-47: Peak Power Spectral Density
802.11n, Channel 149, MCS 0**

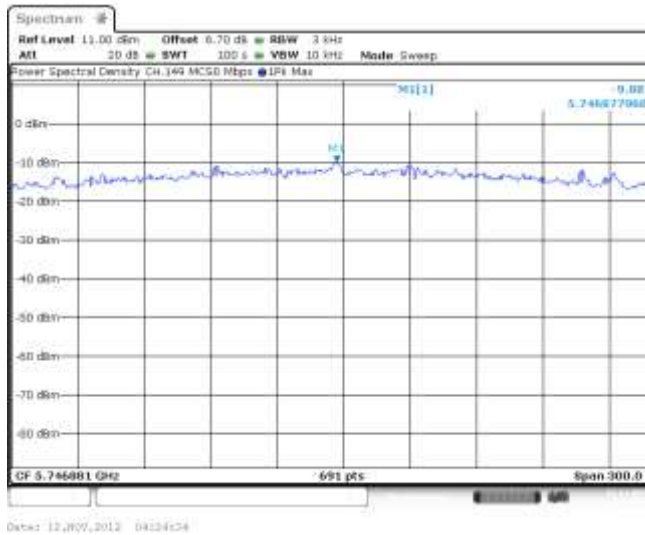


**Figure 6-48: Peak Power Spectral Density
802.11n, Channel 157, MCS 0**

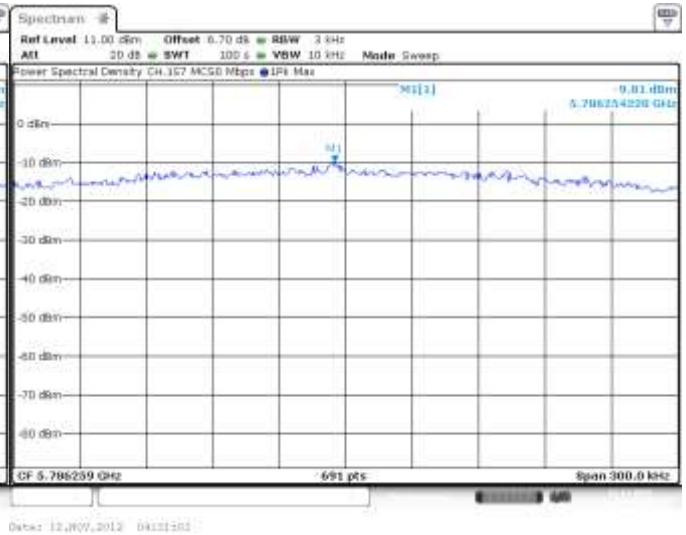


**Figure 6-45: Peak Power Spectral Density
802.11n, Channel 161, MCS 0**

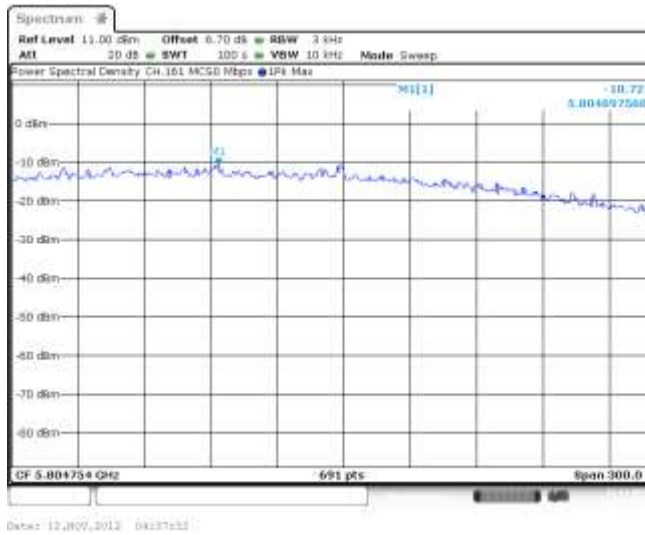

**Figure 6-46: Peak Power Spectral Density
802.11n, Channel 165, MCS 0**

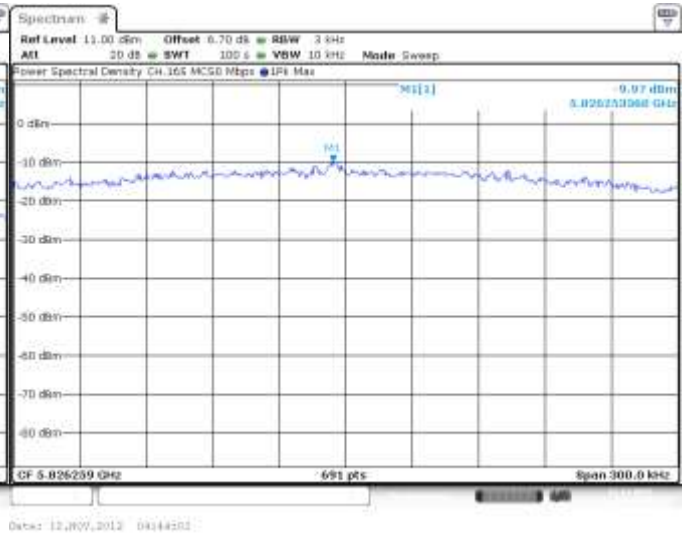

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.407 and RSS-210. Channels 44, 60, and 157 were measured at 6 Mbps each for 802.11a mode. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 29.0 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

Channel	Data Rate	Power (dBm)	Max. Measured Level (dBm)	Limit (dBc)	Margin (dB)
44	6 Mbps	13.68	-39.98	-20	-19.98
60	6 Mbps	12.92	-39.97	-20	-19.97
157	6 Mbps	11.64	-40.71	-20	-20.71

See figures 6-47 to 6-49 for the plots of the spurious RF conducted emissions for Channel 44, 60 and 157 at 6 Mbps each for 802.11a mode.


Test Report No.
RTS-6012-1211-33


Dates of Test
October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11a RF Conducted Emission Test Results cont'd

Figure 6-49b: Spurious RF Conducted Emissions, 802.11a Channel 157, 6 Mbps

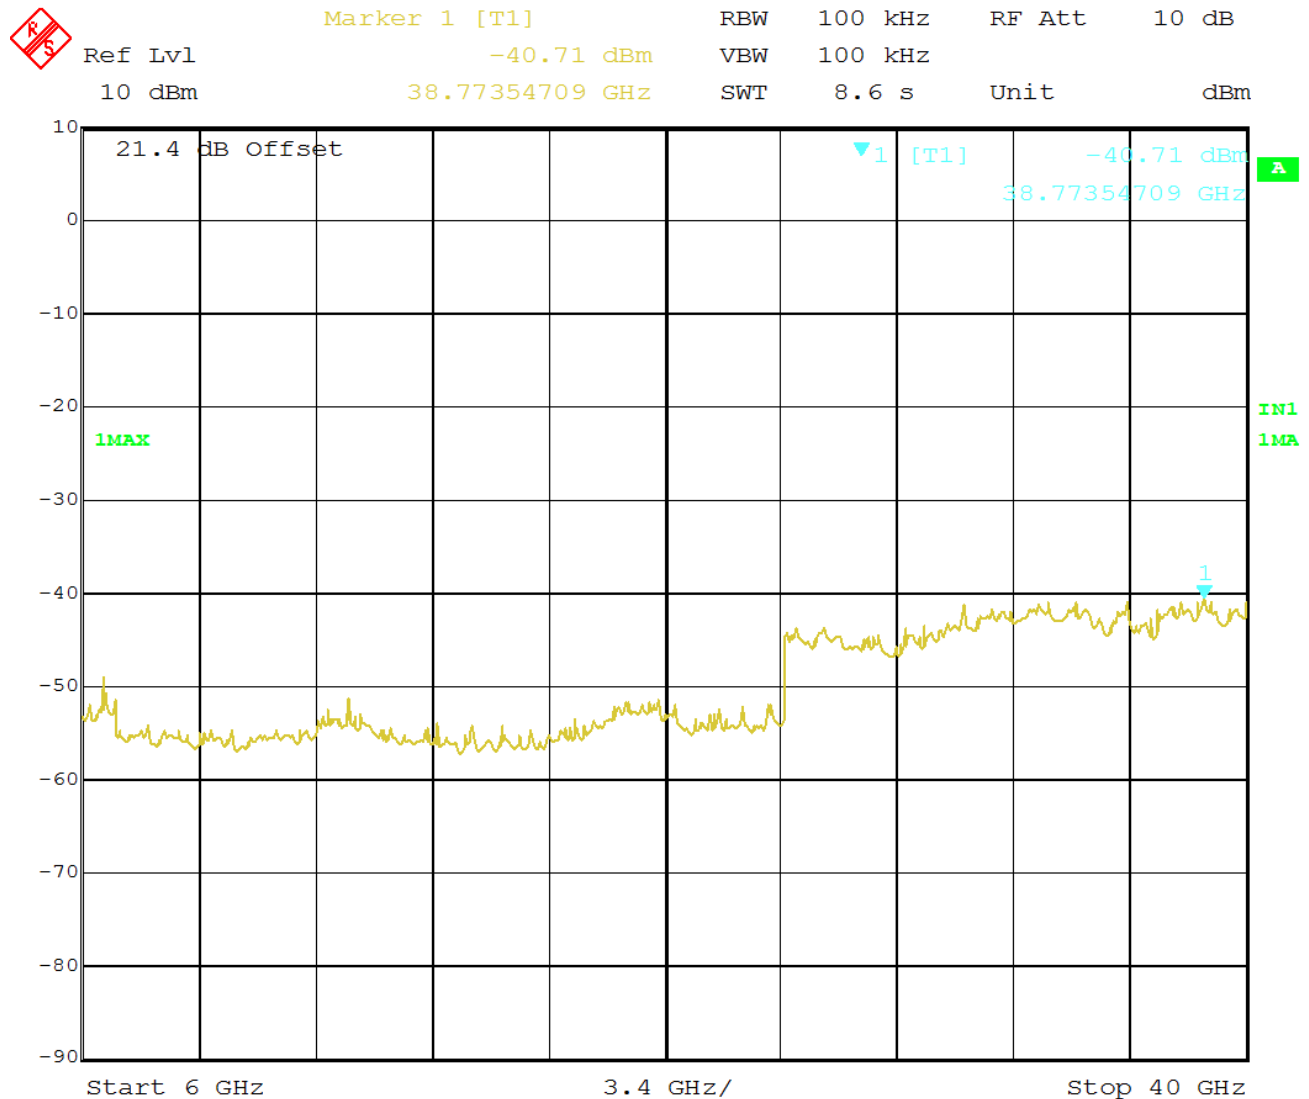

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

802.11n RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.407 and RSS-210. Channels 44, 60, and 157 were measured at 6 Mbps each for 802.11a mode. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 29.0 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

Channel	Data Rate	Power (dBm)	Max. Measured Level (dBm)	Limit (dBc)	Margin (dB)
44	6 Mbps	13.68	-40.26	-20	-20.26
60	6 Mbps	12.92	-41.52	-20	-21.52
157	6 Mbps	11.64	-41.93	-20	-41.93

See figures 6-50 to 6-52 for the plots of the spurious RF conducted emissions for Channel 44, 60 and 157 at 6 Mbps each for 802.11n mode.

Test Report No.
 RTS-6012-1211-33


Dates of Test
 October 1 to November 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

802.11n RF Conducted Emission Test Results cont'd


Figure 6-47a: Spurious RF Conducted Emissions, 802.11n Channel 44, 6 Mbps




	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 6	
Test Report No. RTS-6012-1211-33	Dates of Test October 1 to November 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW


802.11n RF Conducted Emission Test Results cont'd

Figure 6-47a: Spurious RF Conducted Emissions, 802.11n Channel 157, 6 Mbps

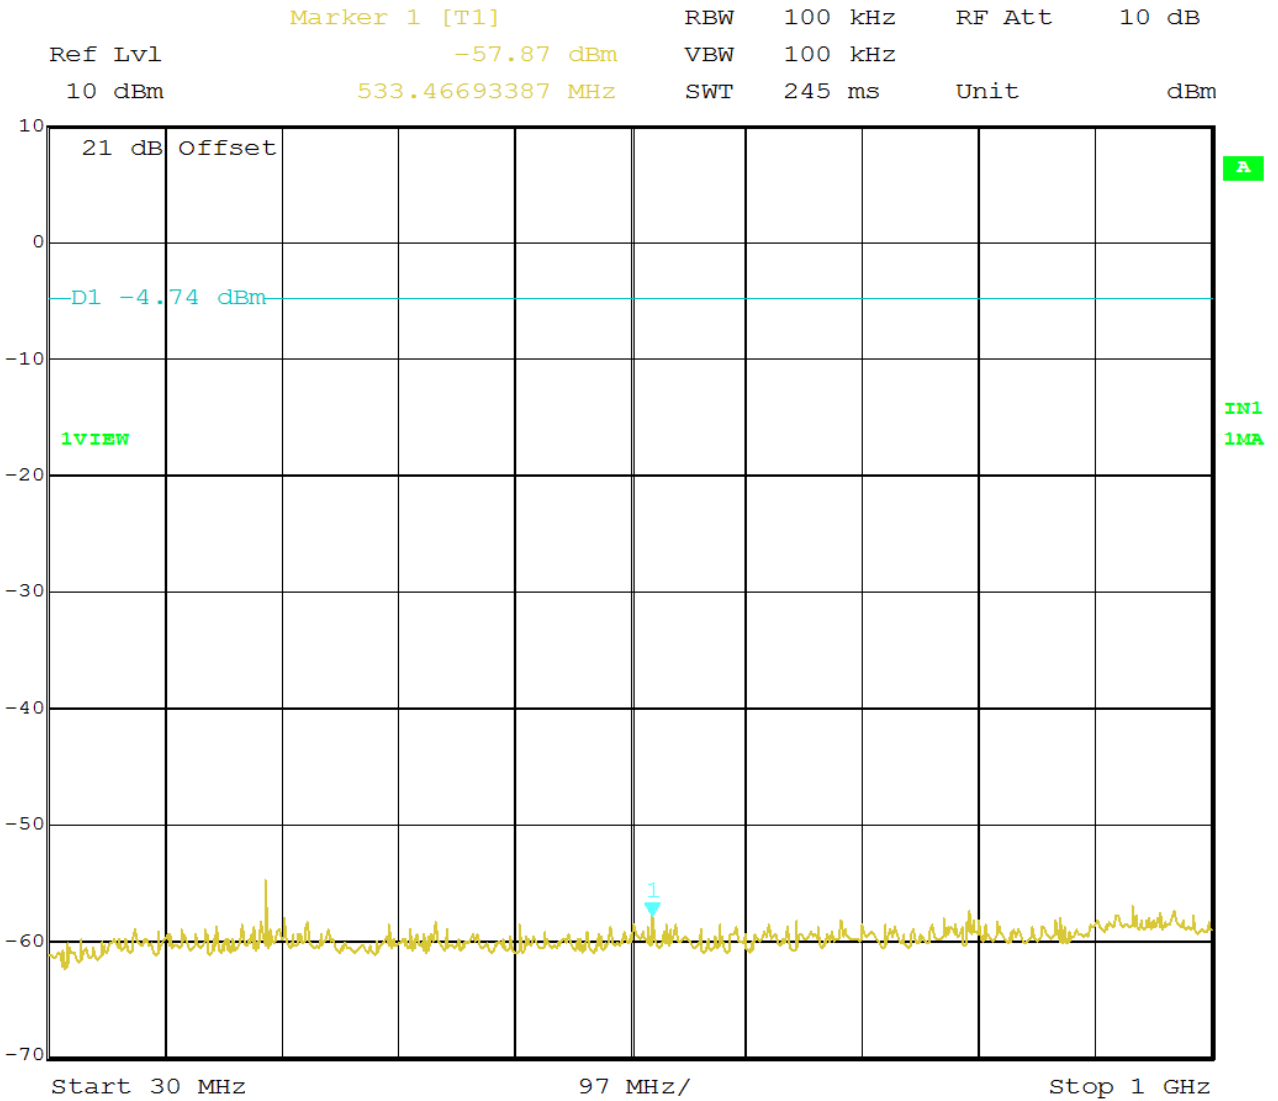

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 7	
Test Report No. RTS-6012-1211-33	Dates of Test October 1, 10, 15, 22, 25, 30-31 and November 1-2, 4-11, 15, 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

APPENDIX 7 – NEAR FIELD COMMUNICATIONS TEST DATA/PLOTS

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 7	
Test Report No. RTS-6012-1211-33	Dates of Test October 1, 10, 15, 22, 25, 30-31 and November 1-2, 4-11, 15, 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Near Field Communications (NFC) Test Results

Radiated Emissions

Date of Test: November 04, 2012
Measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 23.8 °C
Relative Humidity: 28.1 %


The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 9 kHz to 1 GHz.

The BlackBerry® smartphone was in vertical position.

The frequency sweep measurements were performed in Near Field Communications Tx mode at 13.56 MHz.

Frequency (MHz)	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dBµV/m)	Limit (dBµV/m)	Test Margin (dB)
13.56	37.42	18.56	52.98	124.00	-71.02
14.41	9.43	13.19	46.06	69.5	-23.44

All other emissions had a test margin of greater than 25.0 dB.

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW APPENDIX 7	
Test Report No. RTS-6012-1211-33	Dates of Test October 1, 10, 15, 22, 25, 30-31 and November 1-2, 4-11, 15, 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Near Field Communications (NFC) Test Results cont'd

Occupied Bandwidth

Date of test: November 10, 2012.

The measurements were performed by Berkin Can

The environmental test conditions were: Temperature: 24 °C
Relative Humidity: 46 %


Operation mode (TX ON)	Occupied Bandwidth (kHz)
NFC, modulated	424.4370

Figure 7-1: Occupied Bandwidth, NFC TX Frequency = 13.56 MHz


Test Report No.
 RTS-6012-1211-33

Dates of Test
 October 1, 10, 15, 22, 25, 30-31 and
 November 1-2, 4-11, 15, 26, 2012

FCC ID: L6ARFH120LW
IC: 2503A-RFH120LW

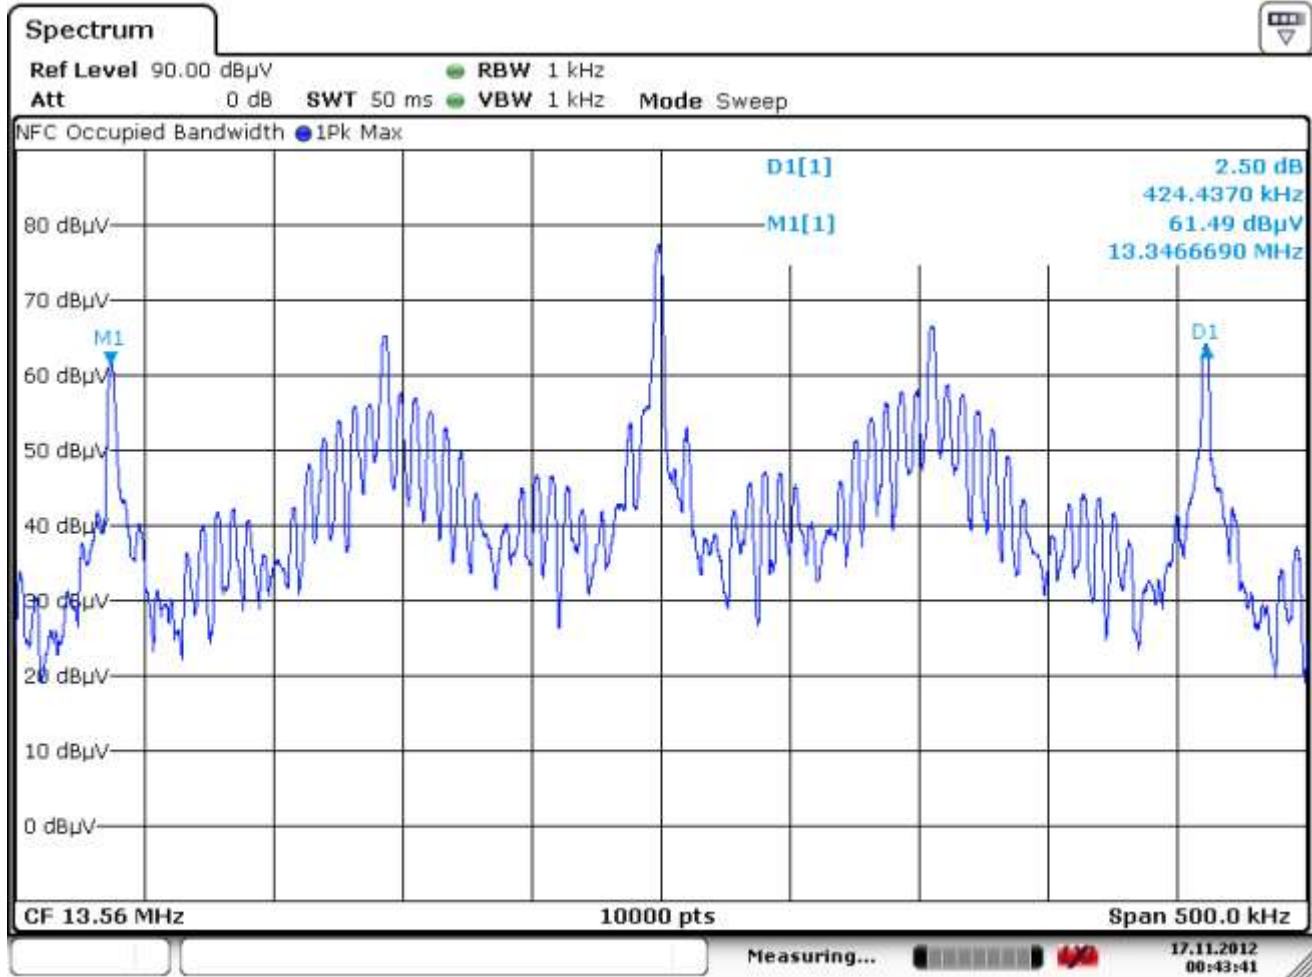

Date: 17.NOV.2012 00:43:41

	EMI Test Report for the BlackBerry® smartphone Model RFH121LW	
	APPENDIX 7	
Test Report No. RTS-6012-1211-33	Dates of Test October 1, 10, 15, 22, 25, 30-31 and November 1-2, 4-11, 15, 26, 2012	FCC ID: L6ARFH120LW IC: 2503A-RFH120LW

Near Field Communications (NFC) Test Results cont'd

Frequency Stability cont'd

Test Temperature (Celsius)	Nominal Freq. (MHz)	Measured Freq. (MHz)	Input Voltage (Volts)	Max Freq Error (Hz)	% Deviation (Limit .01%)	PPM
50	13.56	13.559113	3.6	-887	-0.00654	-65.4130
50	13.56	13.558986	3.8	-1014	-0.00748	-74.7788
50	13.56	13.559160	4.35	-840	-0.00619	-61.9469
60	13.56	13.559046	3.6	-954	-0.00704	-70.3540
60	13.56	13.559130	3.8	-870	-0.00642	-64.1593
60	13.56	13.559122	4.35	-878	-0.00647	-64.7493