
	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>1(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW  2503A-RFK120LW</b>

**APPENDIX C2: SAR DISTRIBUTION PLOTS FOR MOBILE HOTSPOT**

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>2(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/18/2012 3:16:55 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_mid\_chan\_QPSK\_RB\_25\_Offset\_0  
\_amb\_temp\_23.0\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.671 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 18.257 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.9810


**SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.390 mW/g**

Maximum value of SAR (measured) = 0.683 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>3(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

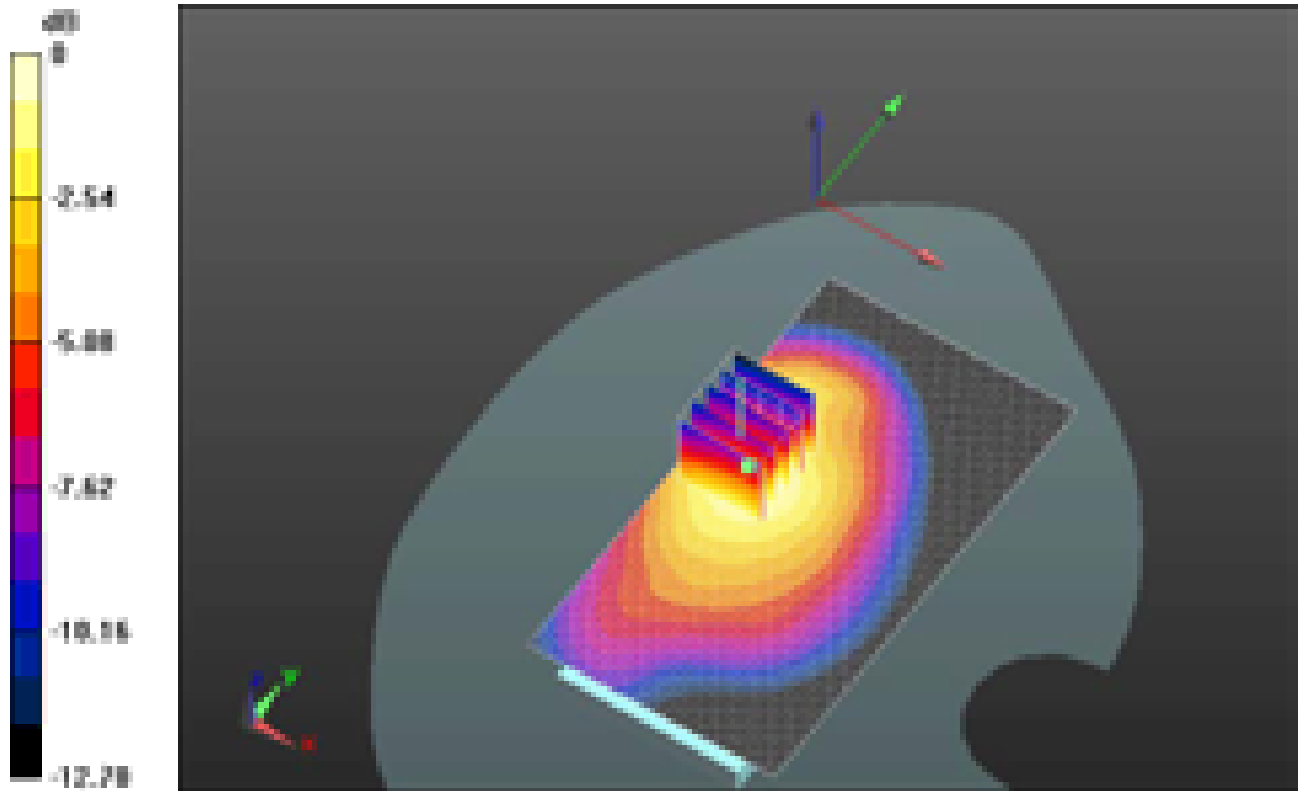

0 dB = 0.680mW/g = -3.35 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>4(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 3:00:30 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_23.1\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.828 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 20.500 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.1690


**SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.487 mW/g**

Maximum value of SAR (measured) = 0.867 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>5(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

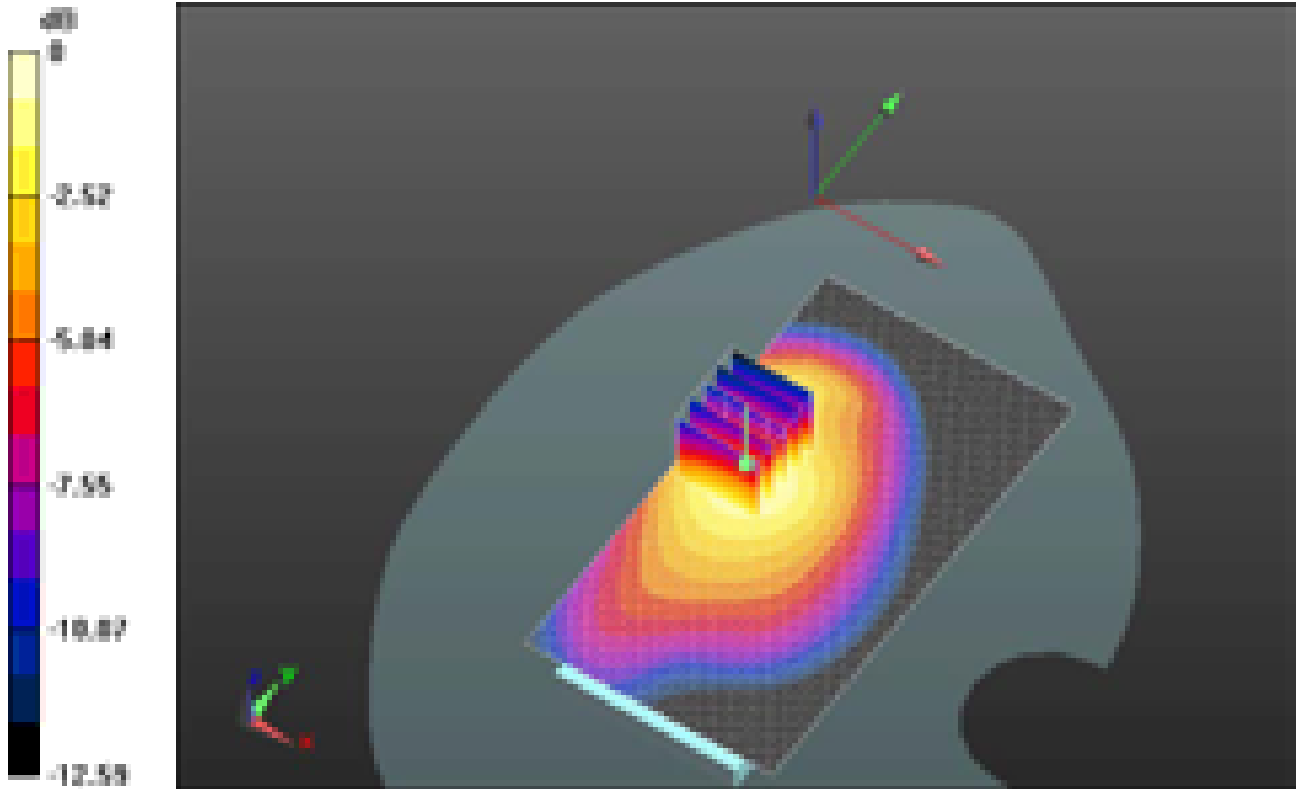

0 dB = 0.870mW/g = -1.21 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>6(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/18/2012 3:34:54 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_Offset\_49  
\_amb\_temp\_22.8\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.868 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 20.896 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.2000


**SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.500 mW/g**

Maximum value of SAR (measured) = 0.887 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>7(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

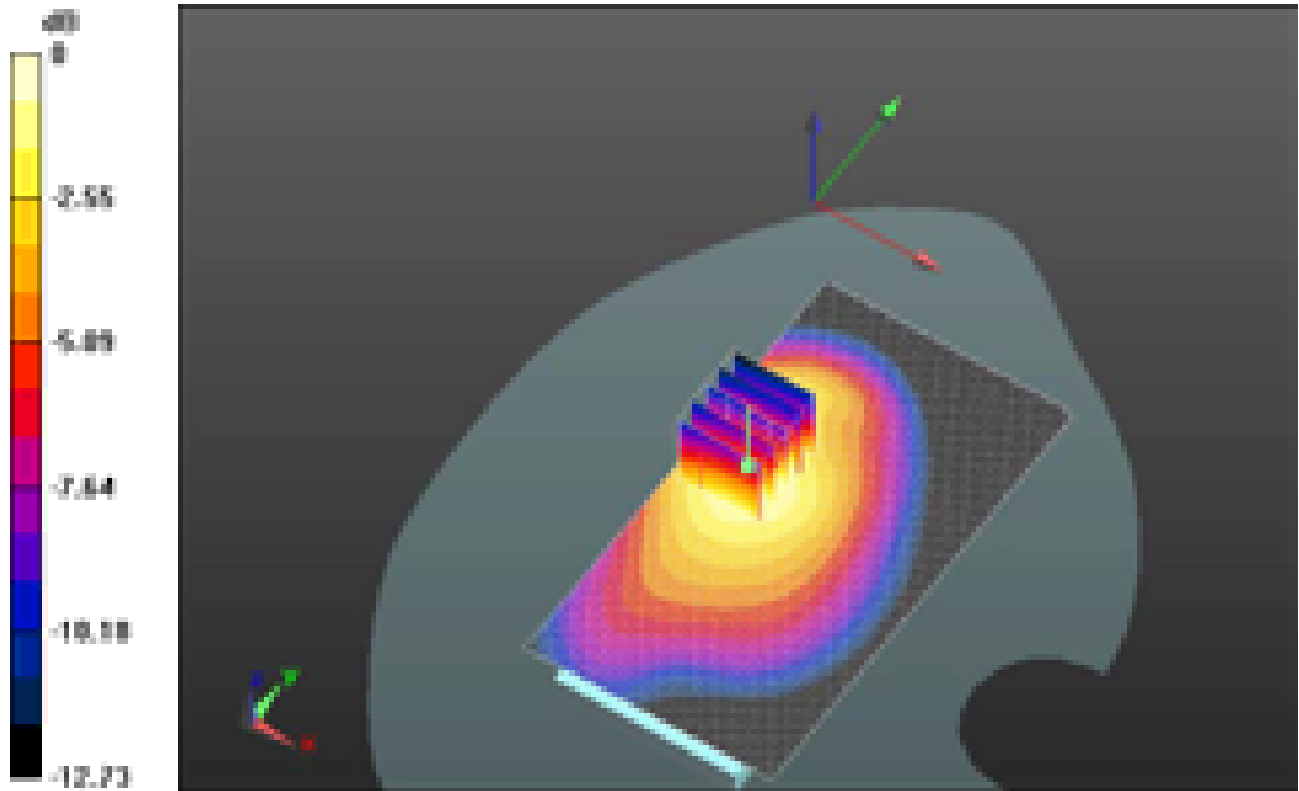

0 dB = 0.890mW/g = -1.01 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>8(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 3:51:44 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_mid\_chan\_16QAM\_RB\_30\_Offset\_20\_amb\_temp\_23.1\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.531 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 16.246 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.7520

**SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.307 mW/g**


Maximum value of SAR (measured) = 0.553 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>9(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

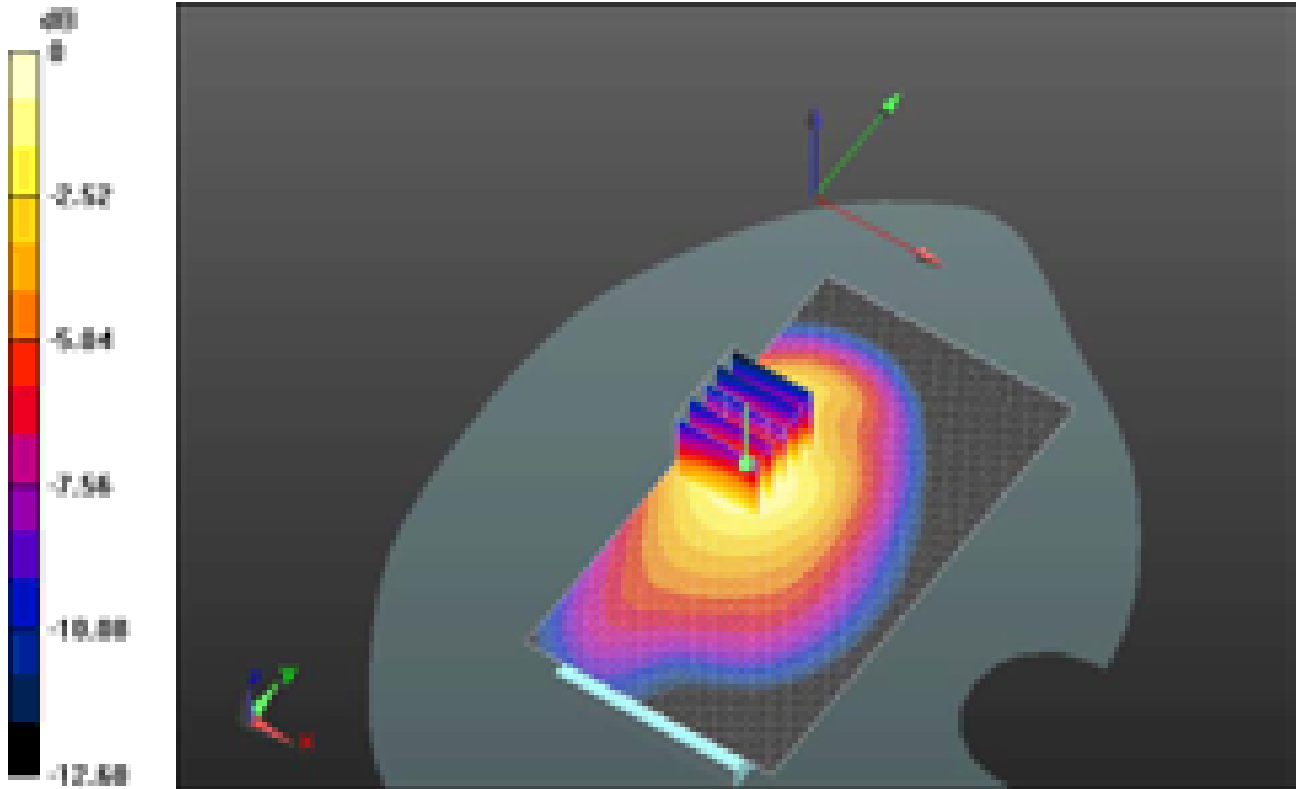

0 dB = 0.550mW/g = -5.19 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>10(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 4:08:00 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_mid\_chan\_16QAM\_RB\_1\_Offset\_0  
\_amb\_temp\_22.9\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.642 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 18.003 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.8410


**SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.360 mW/g**

Maximum value of SAR (measured) = 0.634 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>11(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

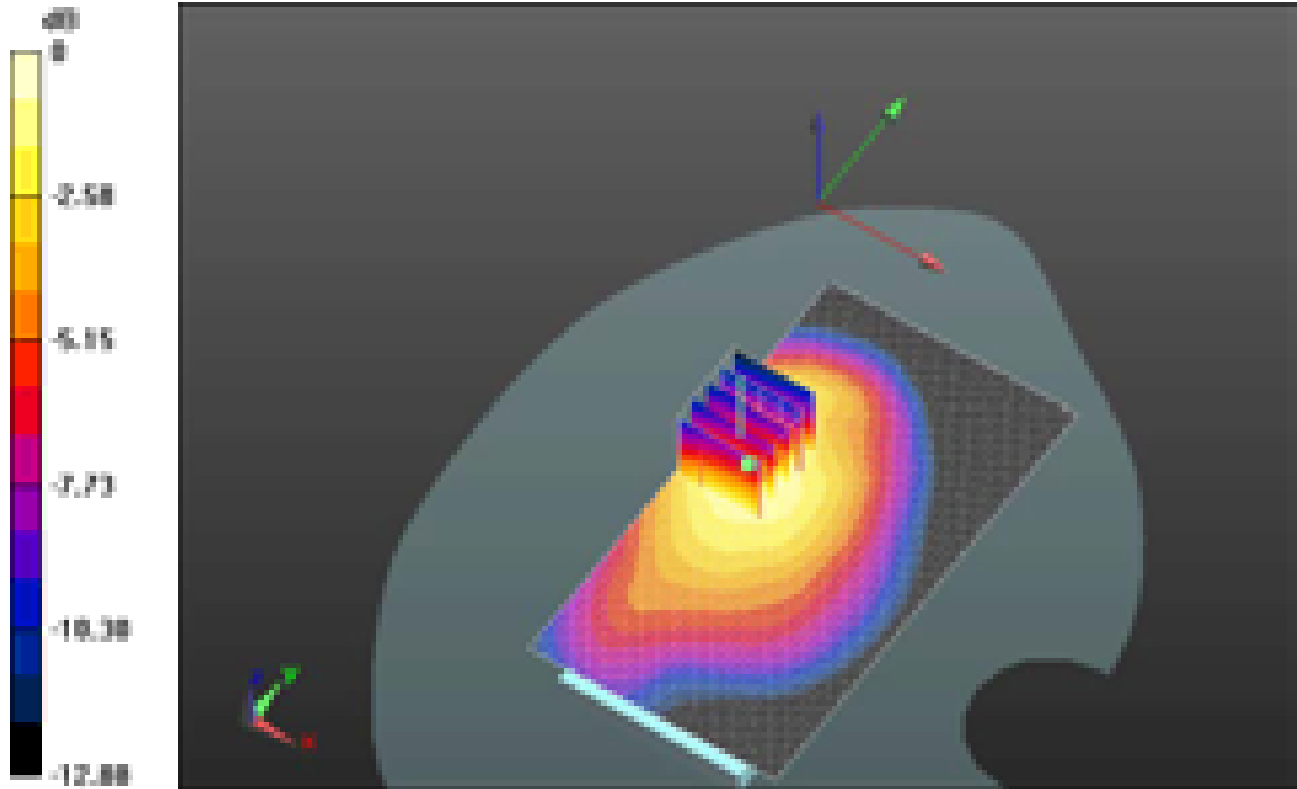

0 dB = 0.630mW/g = -4.01 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>12(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 4:24:18 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_mid\_chan\_16QAM\_RB\_1\_Offset\_49\_amb\_temp\_22.7\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.741 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 18.395 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.0190


**SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.412 mW/g**

Maximum value of SAR (measured) = 0.746 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>13(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

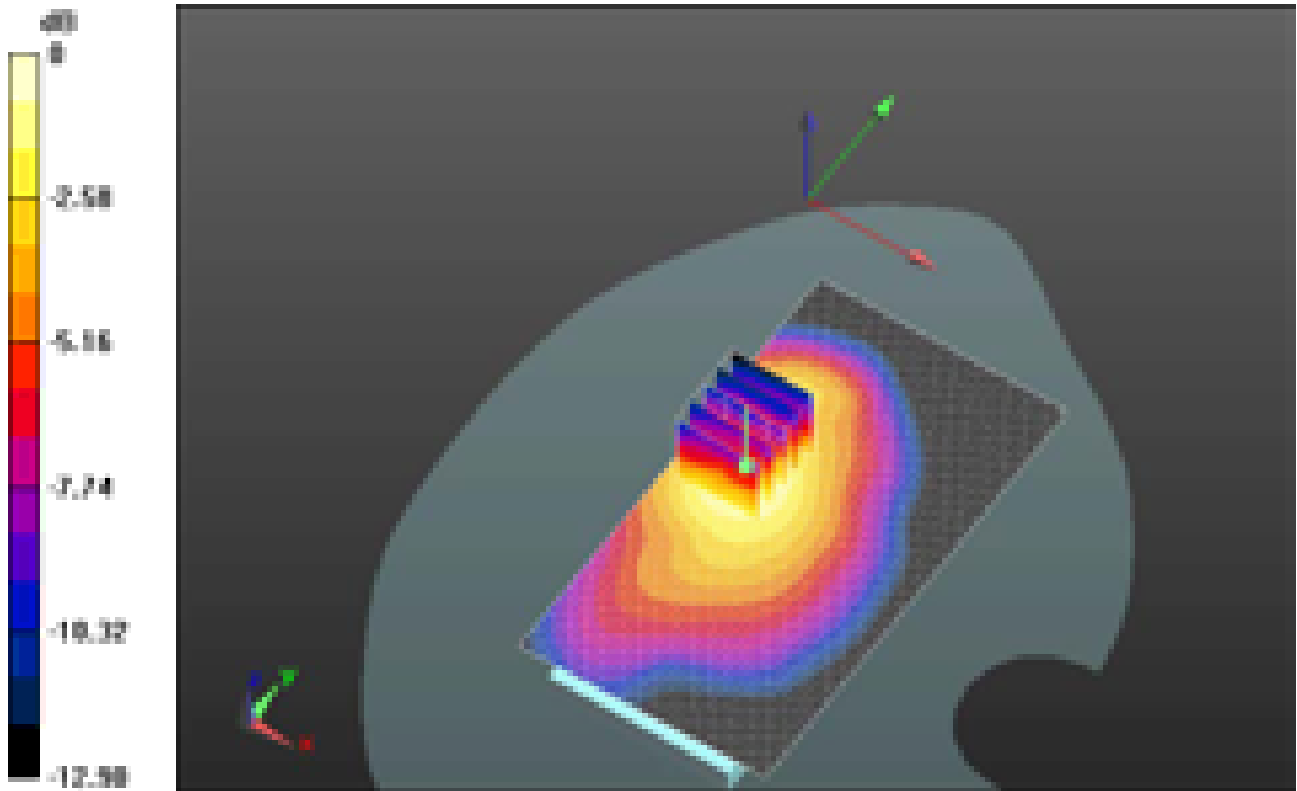

0 dB = 0.750mW/g = -2.50 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>14(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 5:55:49 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_Offset\_49  
\_amb\_temp\_22.6\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.789 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 22.098 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.9850


**SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.457 mW/g**

Maximum value of SAR (measured) = 0.783 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>15(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

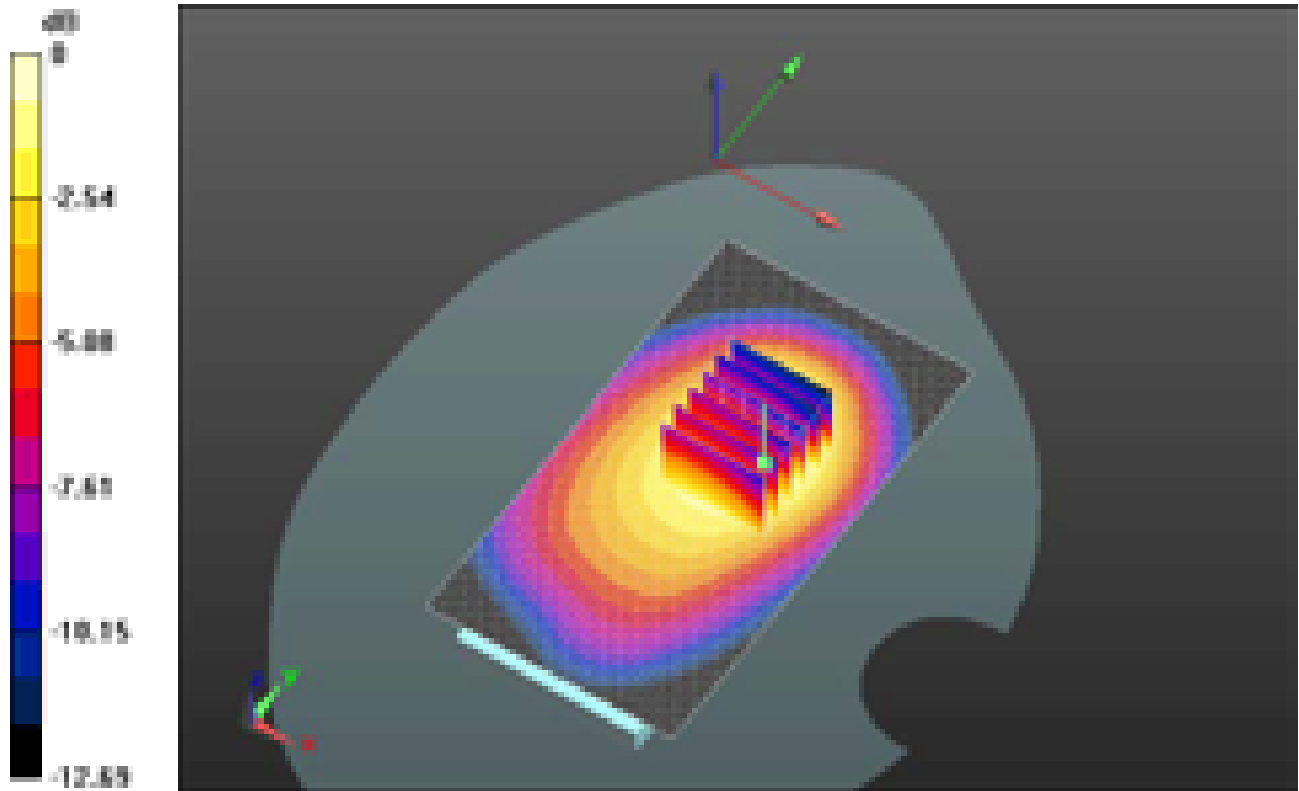

0 dB = 0.780mW/g = -2.16 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>16(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 11:11:22 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_Offset\_49\_amb\_temp\_23.1C\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.466 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 21.274 V/m; Power Drift = -0.0049 dB


Peak SAR (extrapolated) = 0.5920

**SAR(1 g) = 0.403 mW/g; SAR(10 g) = 0.272 mW/g**


Maximum value of SAR (measured) = 0.468 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>17(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

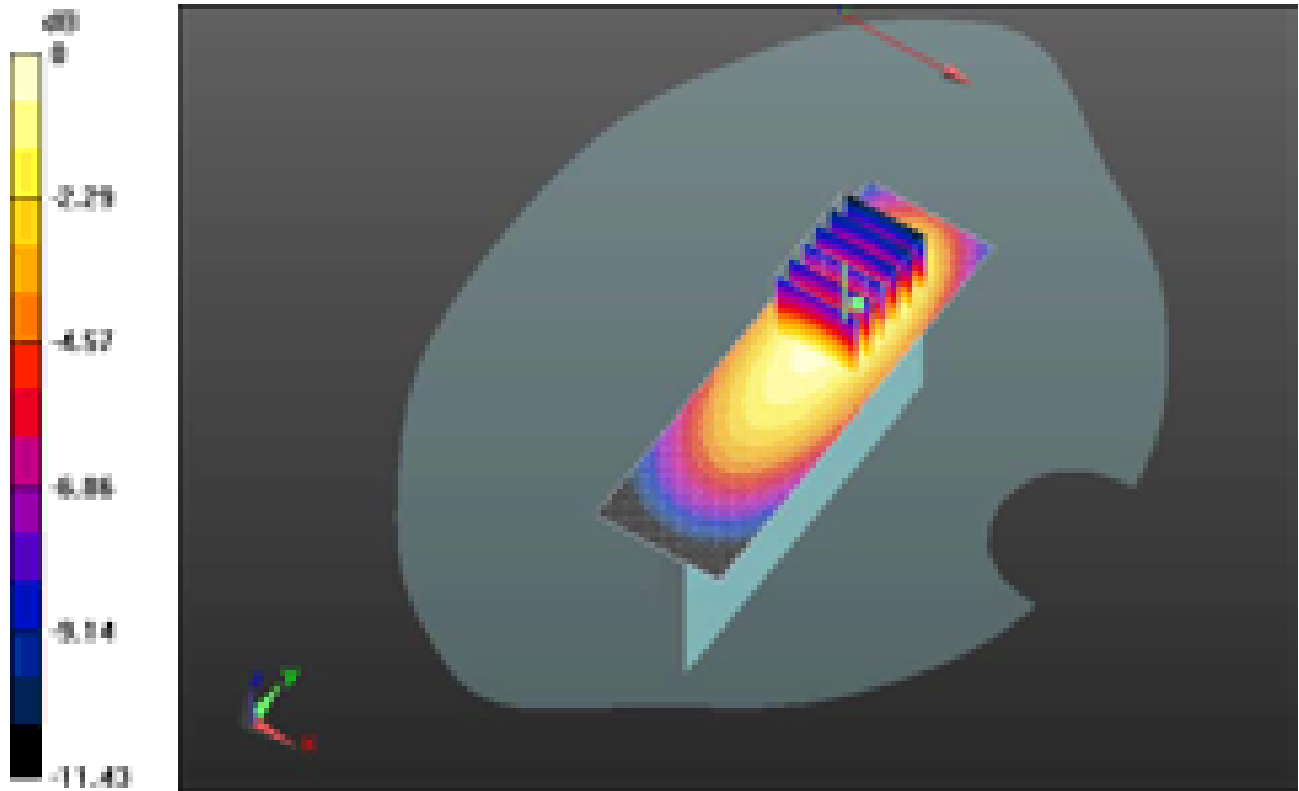

0 dB = 0.470mW/g = -6.56 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>18(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 10:24:18 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_Offset\_49  
\_amb\_temp\_22.8C\_liq\_temp\_21.6C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.268 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 16.432 V/m; Power Drift = -0.29 dB

Peak SAR (extrapolated) = 0.3300


**SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.164 mW/g**

Maximum value of SAR (measured) = 0.270 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>19(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

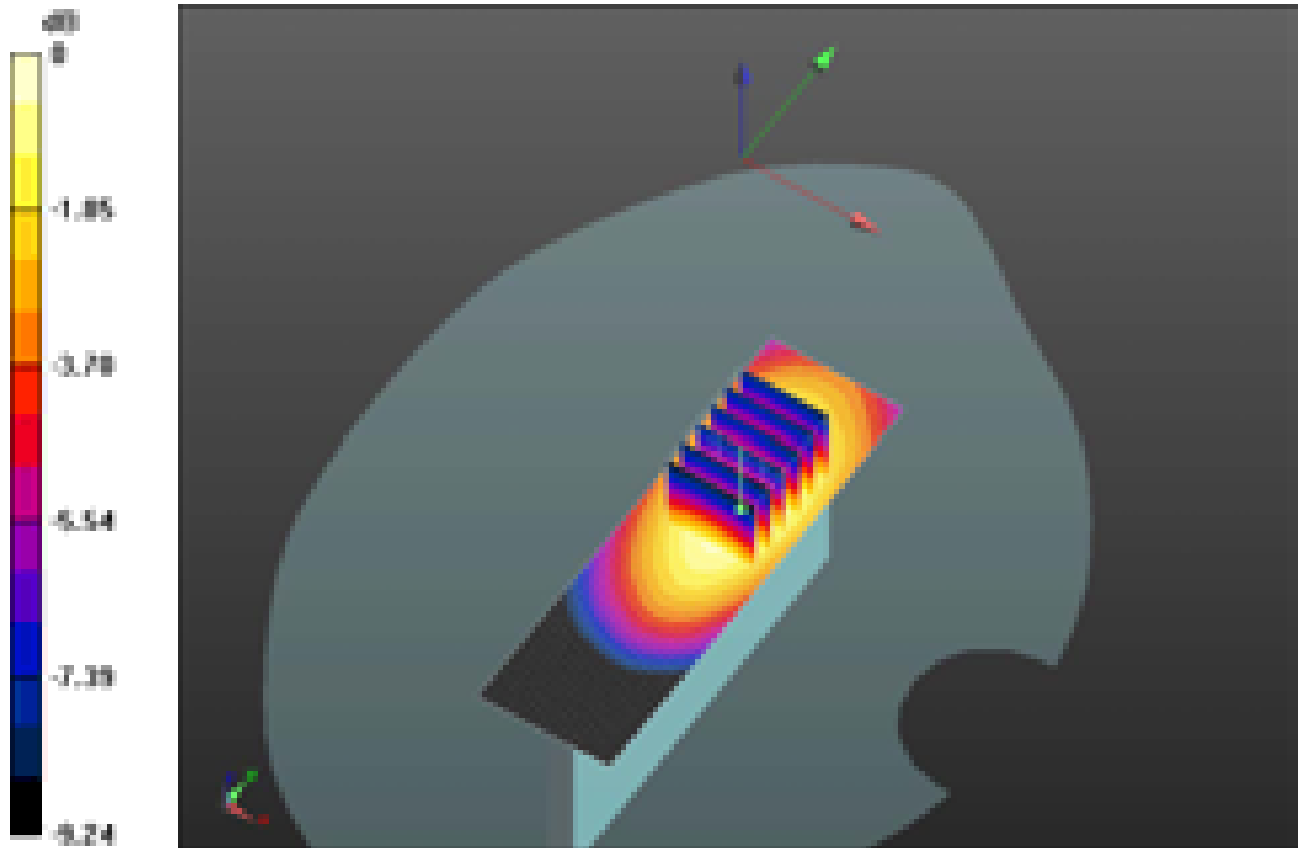

0 dB = 0.270mW/g = -11.37 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>20(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 11:33:50 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_Offset\_49\_amb\_temp\_22.9\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.182 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 14.213 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.2860


**SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.077 mW/g**

Maximum value of SAR (measured) = 0.186 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>21(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

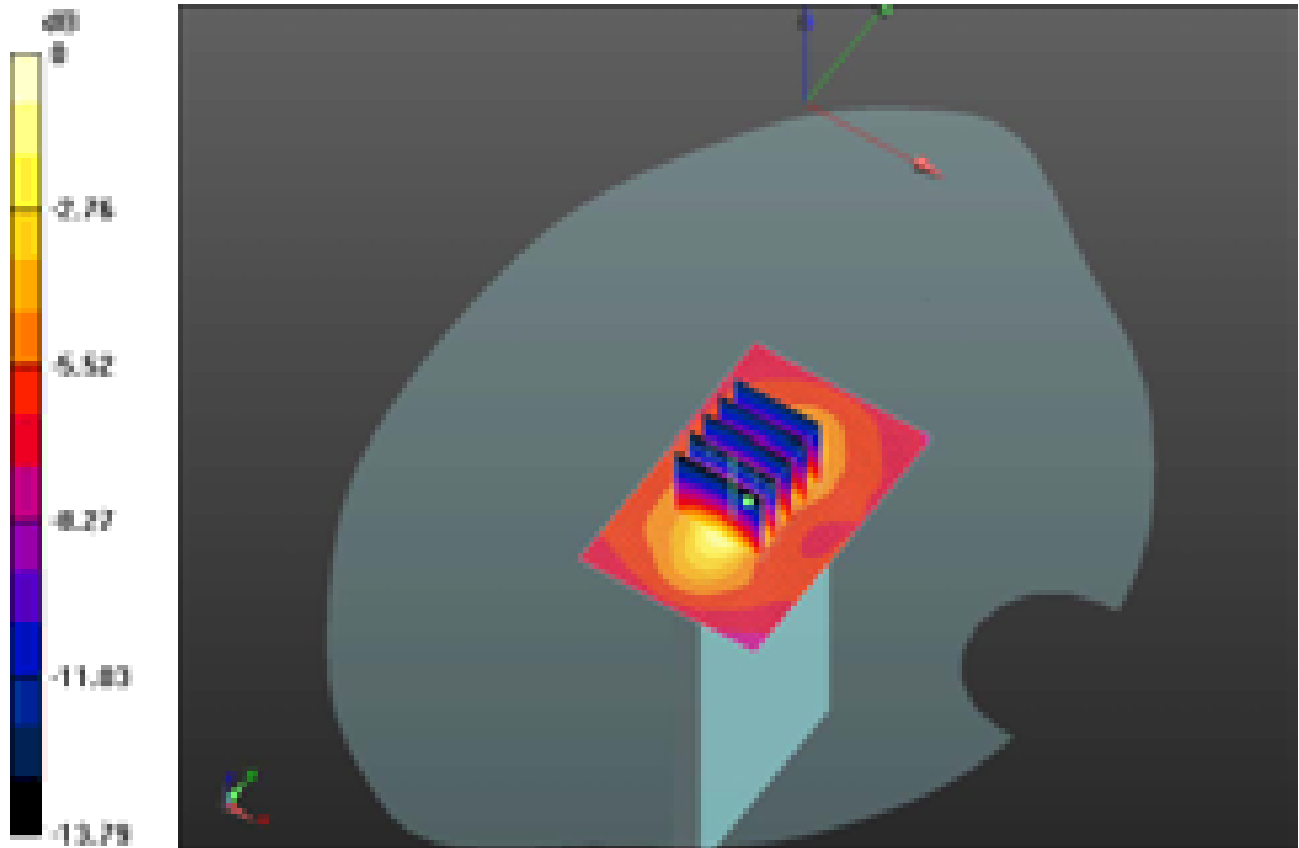

0 dB = 0.190mW/g = -14.42 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>22(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 5:20:37 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_Headset\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_  
Offset\_49\_amb\_temp\_22.7\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 55.812$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.833 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.298 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.1440

**SAR(1 g) = 0.707 mW/g; SAR(10 g) = 0.457 mW/g**


Maximum value of SAR (measured) = 0.842 mW/g

**Configuration/Touch position -/Zoom Scan 2 (5x5x7) (7x9x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.298 V/m; Power Drift = -0.0098 dB


Peak SAR (extrapolated) = 1.1130

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>23(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

**SAR(1 g) = 0.696 mW/g; SAR(10 g) = 0.453 mW/g**  
 Maximum value of SAR (measured) = 0.817 mW/g

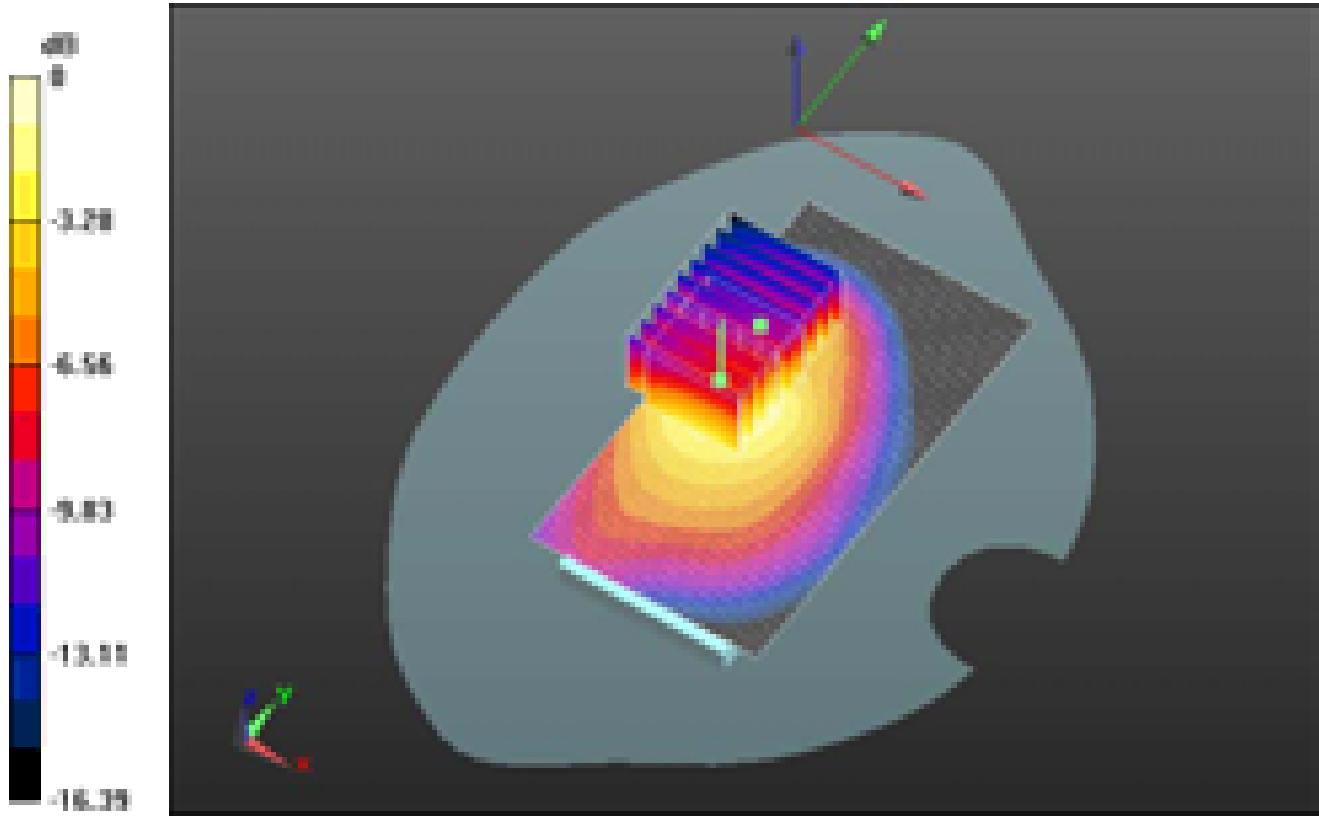

0 dB = 0.820mW/g = -1.72 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>24(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/29/2012 12:32:14 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_low\_chan\_QPSK\_RB\_1\_Offset\_49  
\_amb\_temp\_24.1\_liq\_temp\_22.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE 700\_Band 17; Frequency: 704 MHz

Medium parameters used (interpolated):  $f = 704$  MHz;  $\sigma = 0.913$  mho/m;  $\epsilon_r = 54.695$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.745 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 19.983 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.9960


**SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.427 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.743 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>25(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

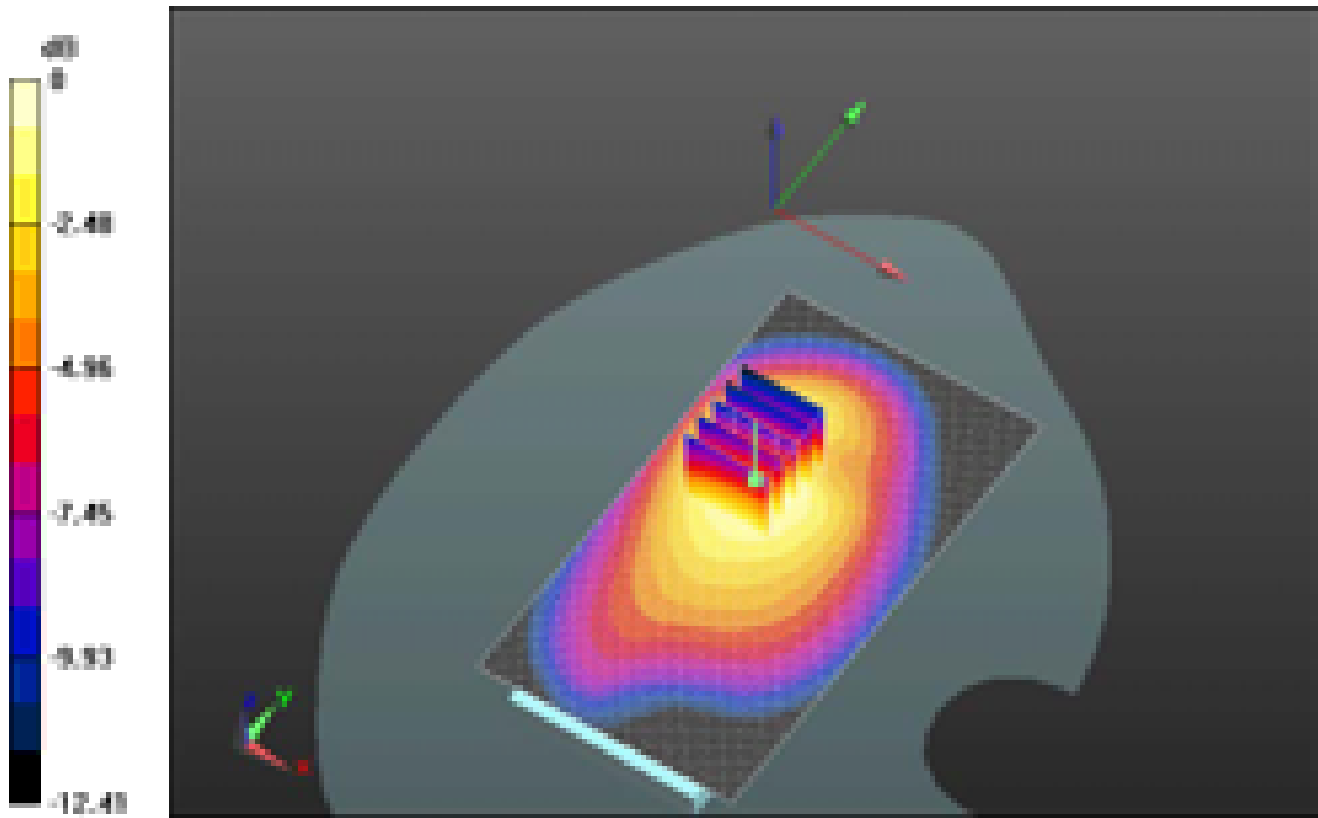

0 dB = 0.740mW/g = -2.62 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>26(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/29/2012 11:52:08 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_mid\_chan\_QPSK\_RB\_1\_Offset\_49  
\_amb\_temp\_24.0\_liq\_temp\_22.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 710 MHz

Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.918 \text{ mho/m}$ ;  $\epsilon_r = 54.657$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.023 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 23.644 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.3610

**SAR(1 g) = 0.876 mW/g; SAR(10 g) = 0.582 mW/g**

Maximum value of SAR (measured) = 1.018 mW/g

**Configuration/Touch position -/Zoom Scan 2 (5x5x7) (7x9x7)/Cube 0:**


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 23.644 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.3280


**SAR(1 g) = 0.864 mW/g; SAR(10 g) = 0.576 mW/g**

Maximum value of SAR (measured) = 1.003 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>27(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

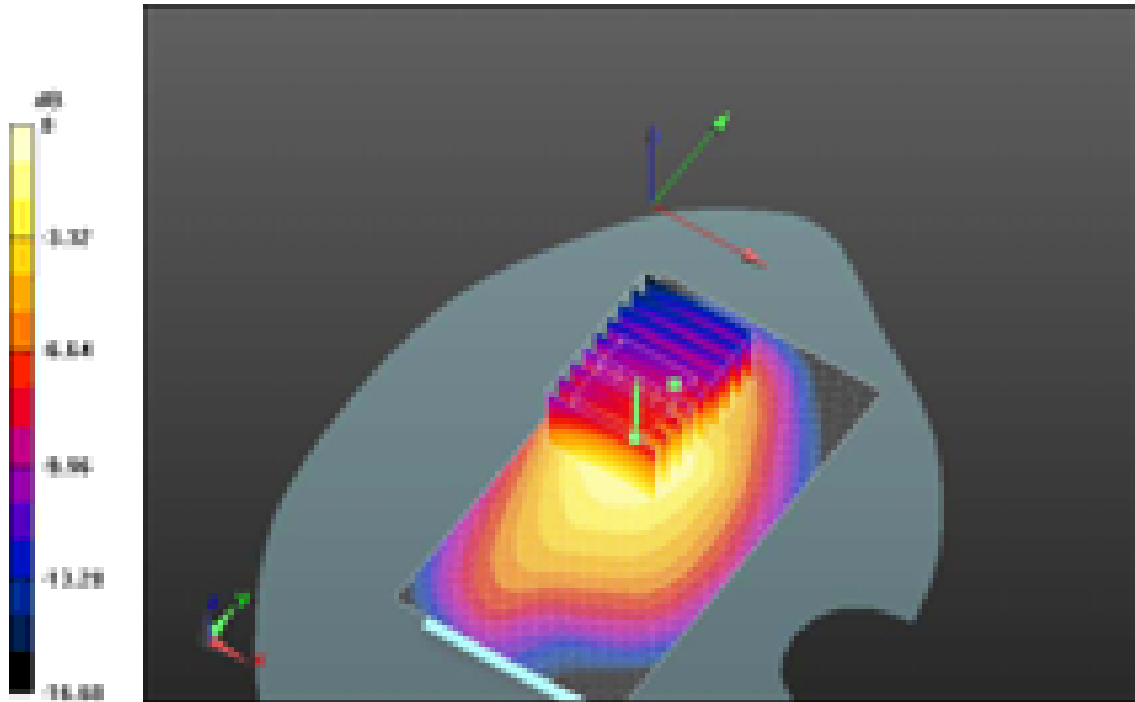

0 dB = 1.000mW/g = 0 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>28(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/29/2012 12:48:45 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_17\_high\_chan\_QPSK\_RB\_1\_Offset\_49  
\_amb\_temp\_24.1\_liq\_temp\_22.7C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE 700\_Band 17; Frequency: 716 MHz

Medium parameters used (interpolated):  $f = 716$  MHz;  $\sigma = 0.921$  mho/m;  $\epsilon_r = 54.589$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.566 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 17.592 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.7340

**SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.321 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.564 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>29(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

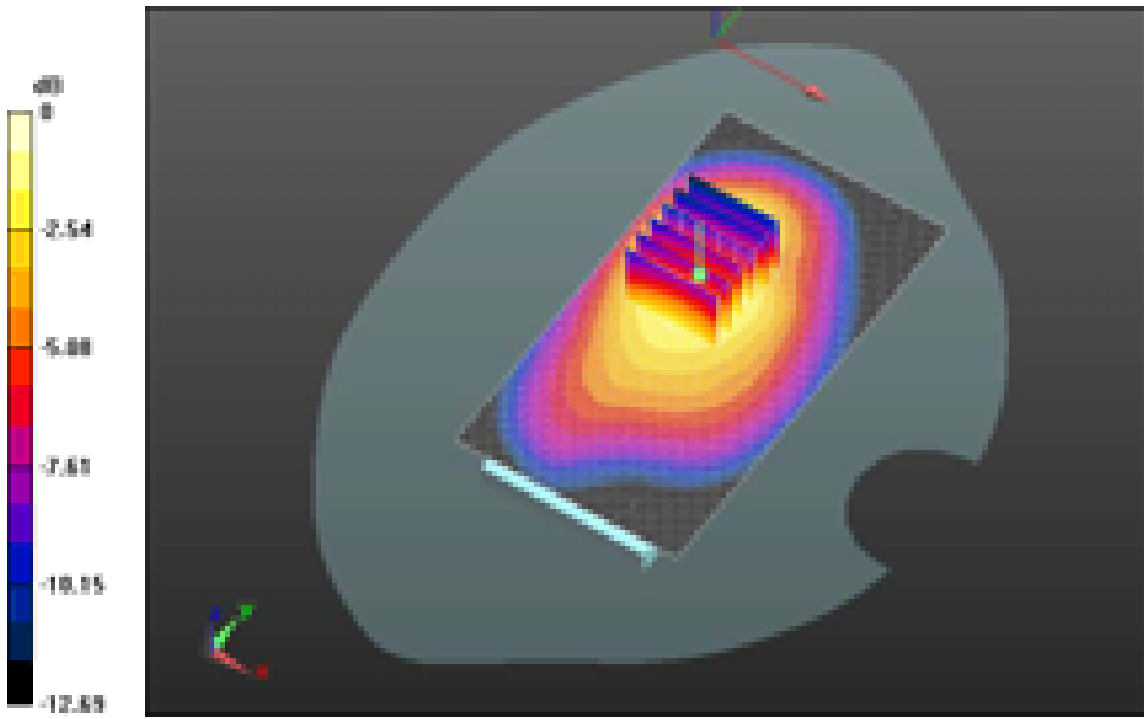

0 dB = 0.560mW/g = -5.04 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>30(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>

Date/Time: 6/7/2012 7:06:32 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_5\_mid\_chan\_QPSK\_RB\_25\_Offset\_0\_amb\_temp\_22.6\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.773 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 24.748 V/m; Power Drift = -0.0087 dB


Peak SAR (extrapolated) = 0.9310

**SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.497 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.765 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>31(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

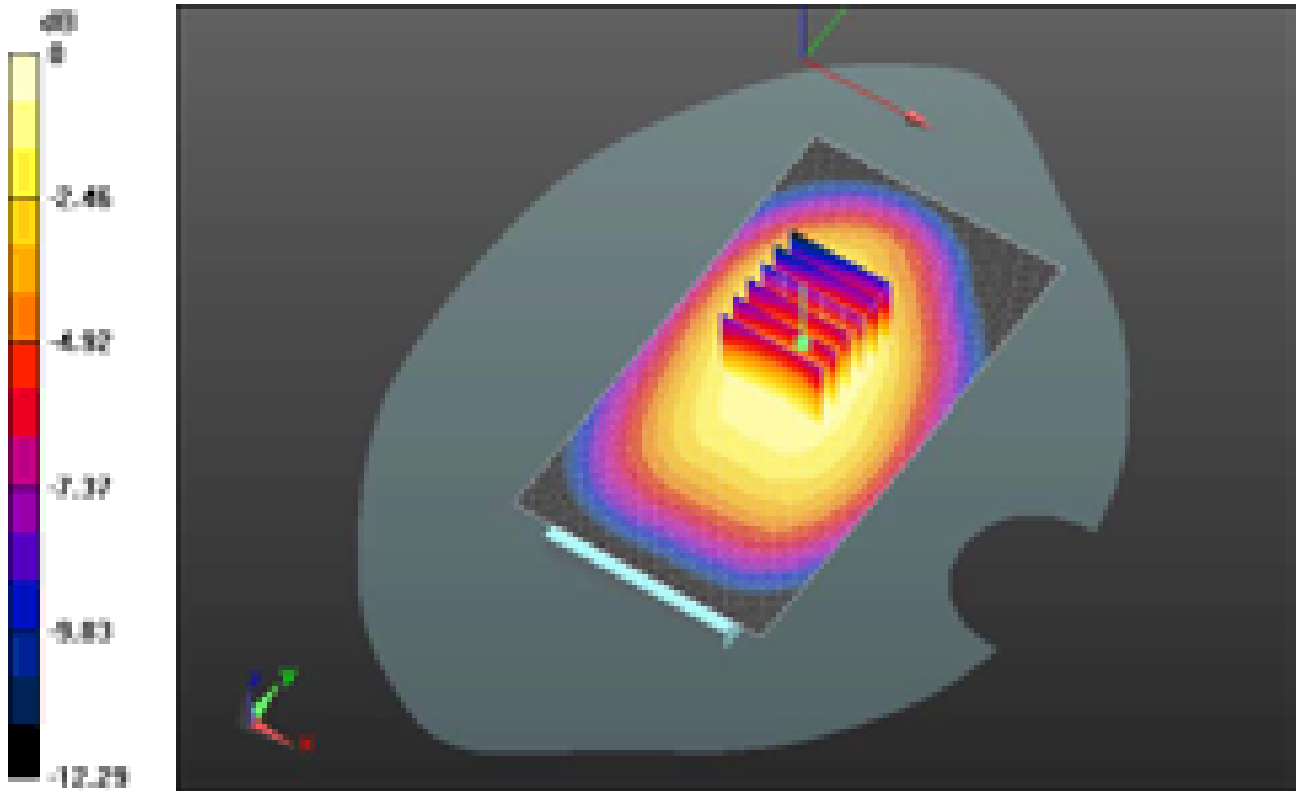

0 dB = 0.770mW/g = -2.27 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>32(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/7/2012 7:30:47 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_22.2\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15\text{mm}$ ,  $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.883 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.724 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.0220


**SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.565 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.852 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>33(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

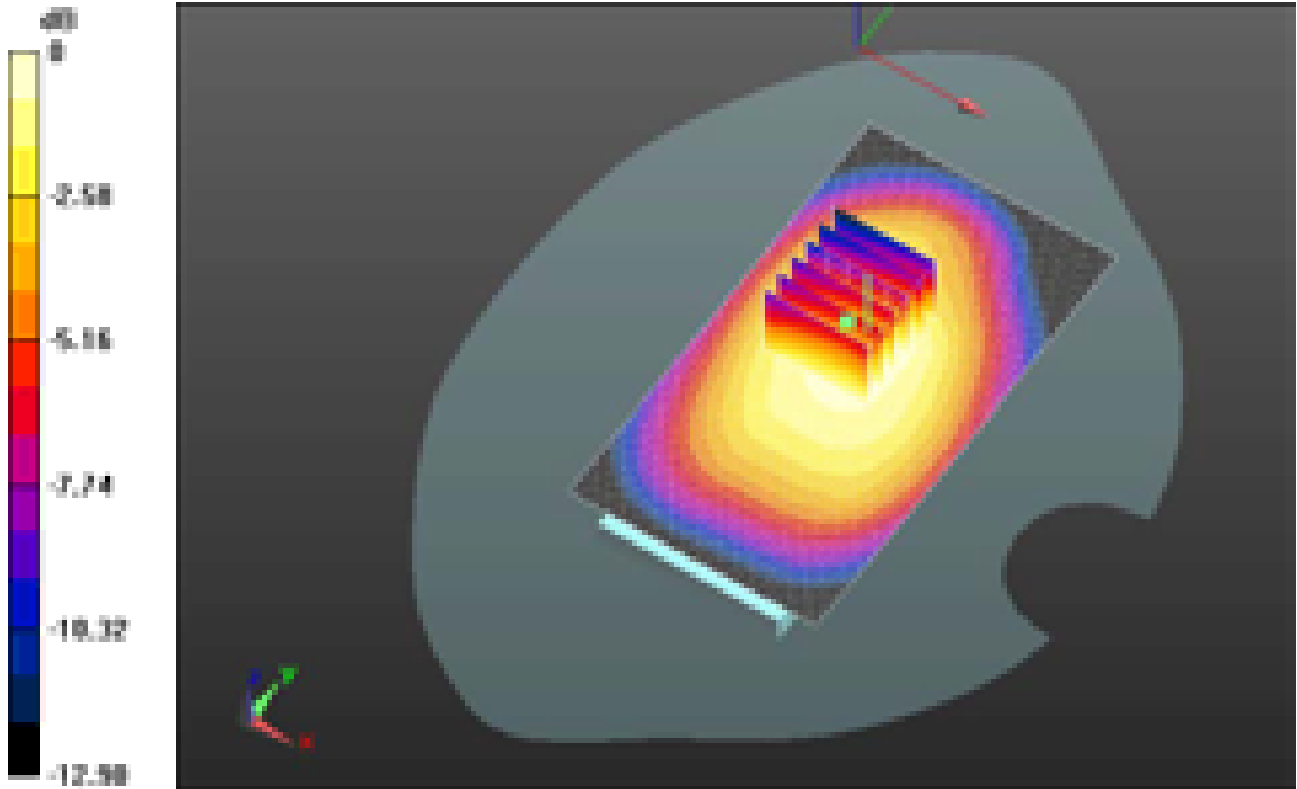

0 dB = 0.850mW/g = -1.41 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>34(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/7/2012 7:51:31 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_Offset\_49\_amb\_temp\_22.7\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.893 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 26.483 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.0710

**SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.568 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.855 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>35(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

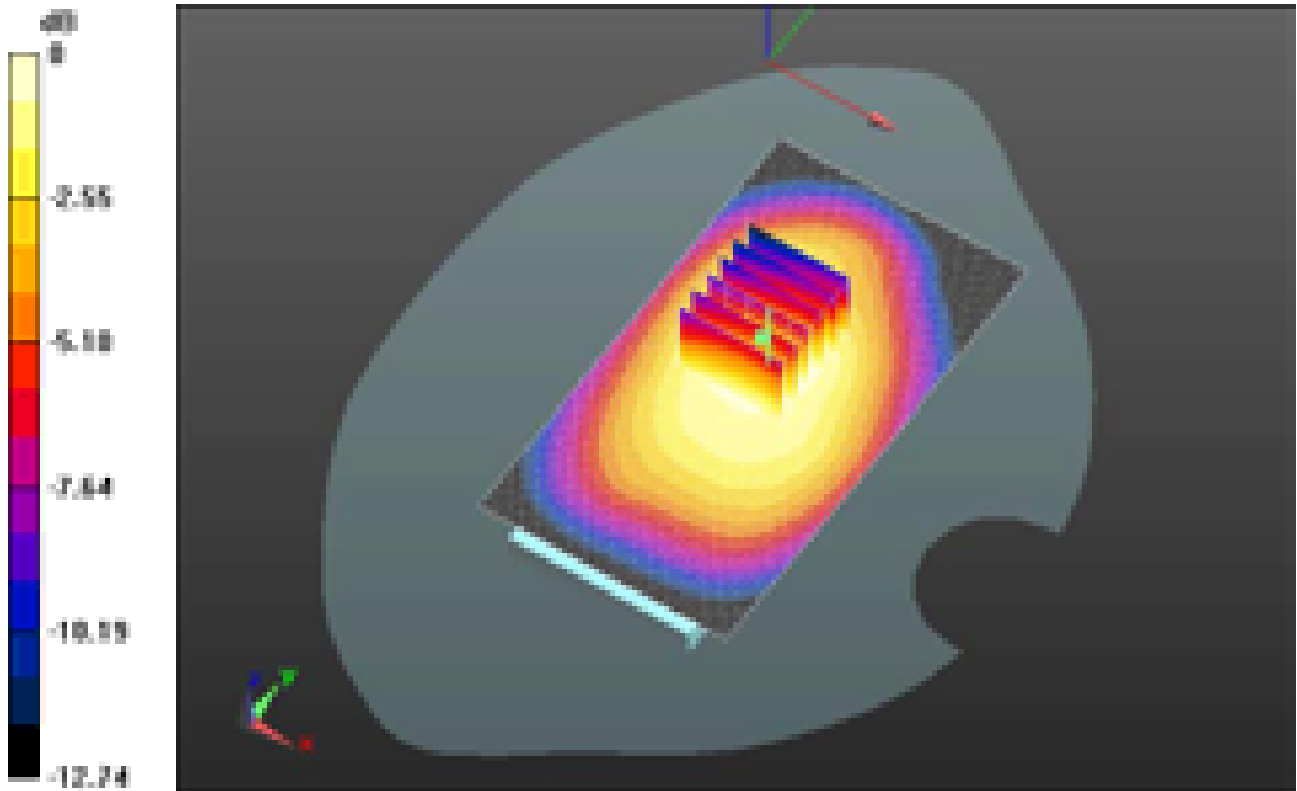

0 dB = 0.850mW/g = -1.41 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>36(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/7/2012 9:18:30 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_5\_mid\_chan\_16QAM\_RB\_30\_Offset\_0\_amb\_temp\_22.4\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.628 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 22.789 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.7770

**SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.405 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.621 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>37(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

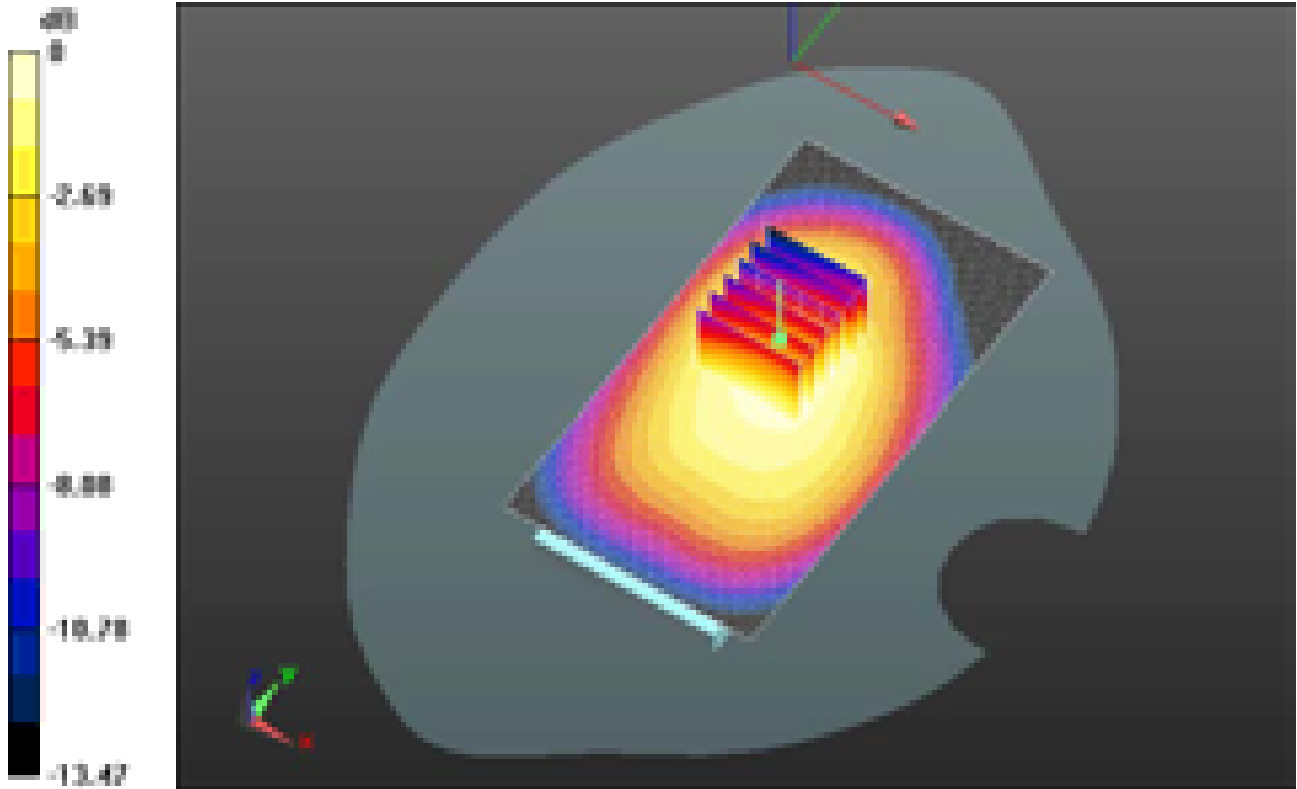

0 dB = 0.620mW/g = -4.15 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>38(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/7/2012 9:40:25 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_5\_mid\_chan\_16QAM\_RB\_1\_Offset\_0\_amb\_temp\_22.5\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.693 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 23.744 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.8240

**SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.443 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.659 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>39(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

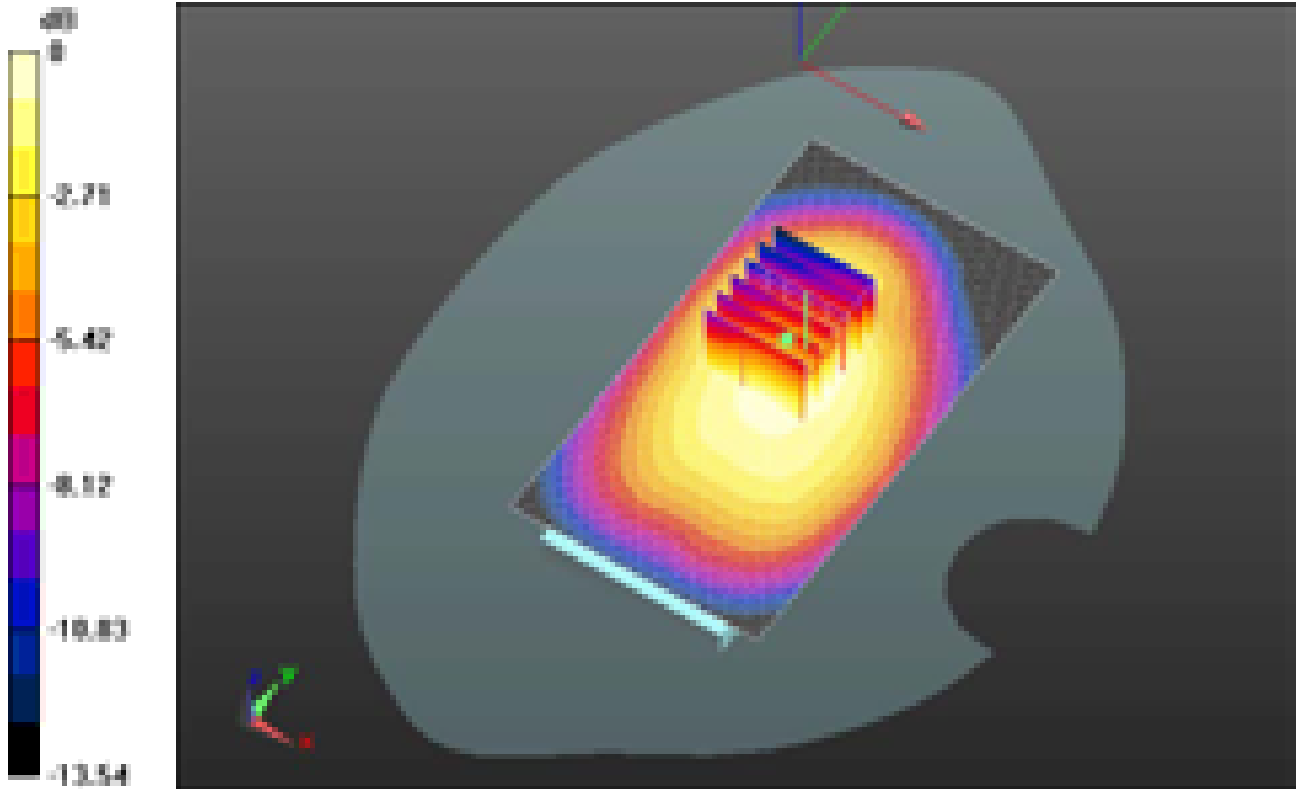

0 dB = 0.660mW/g = -3.61 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>40(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/7/2012 9:59:42 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_5\_mid\_chan\_16QAM\_RB\_1\_Offset\_49  
\_amb\_temp\_22.9\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.685 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 23.973 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.9400


**SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.440 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.711 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>41(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

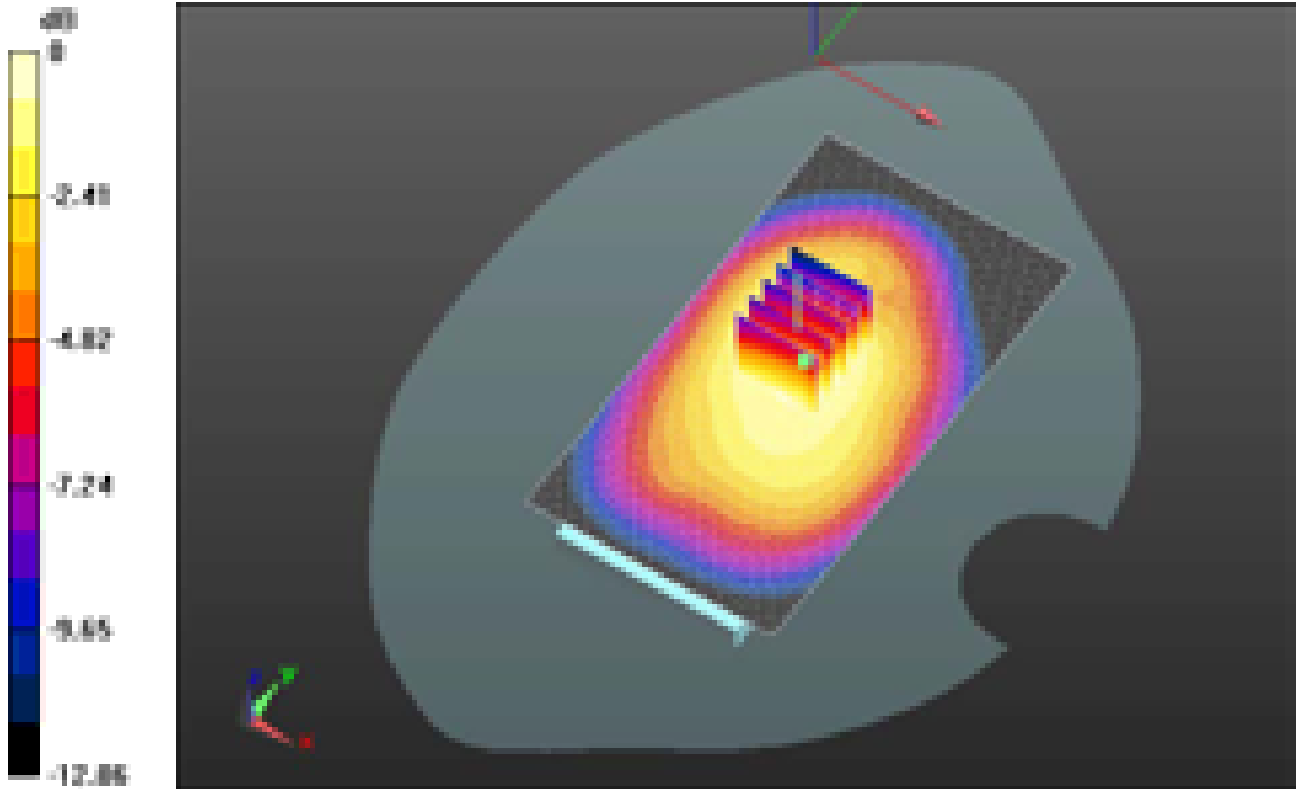

0 dB = 0.710mW/g = -2.97 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>42(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/7/2012 10:42:50 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_Offset\_49\_amb\_temp\_22.9\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.892 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 26.353 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.0810

**SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.573 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.882 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>43(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

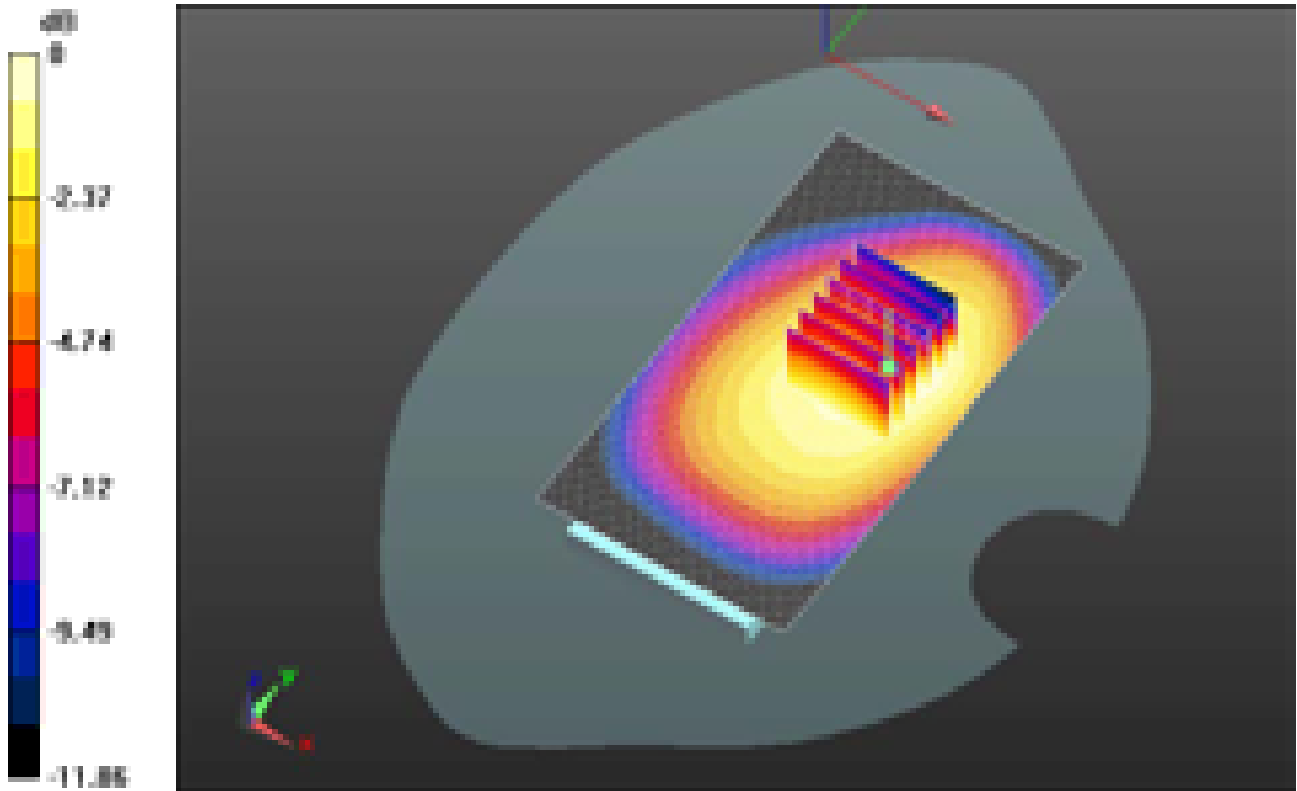

0 dB = 0.880mW/g = -1.11 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>44(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/8/2012 4:09:01 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_Offset\_49\_a  
mb\_temp\_23.2\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.654 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 27.198 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.8090

**SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.393 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.660 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>45(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

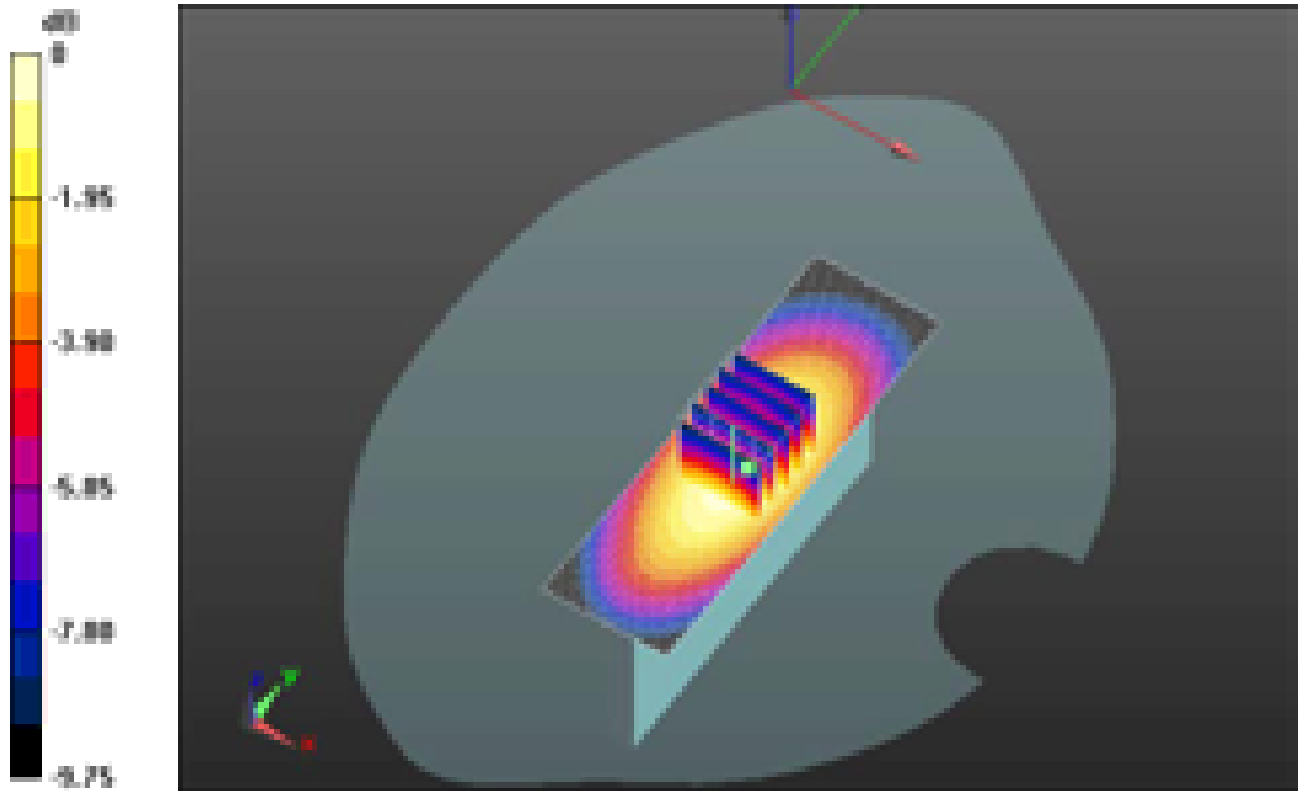

0 dB = 0.660mW/g = -3.61 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>46(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/8/2012 4:23:18 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_Offset\_49\_amb\_temp\_23.4\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.890 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 31.032 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.1110

**SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.536 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.900 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>47(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

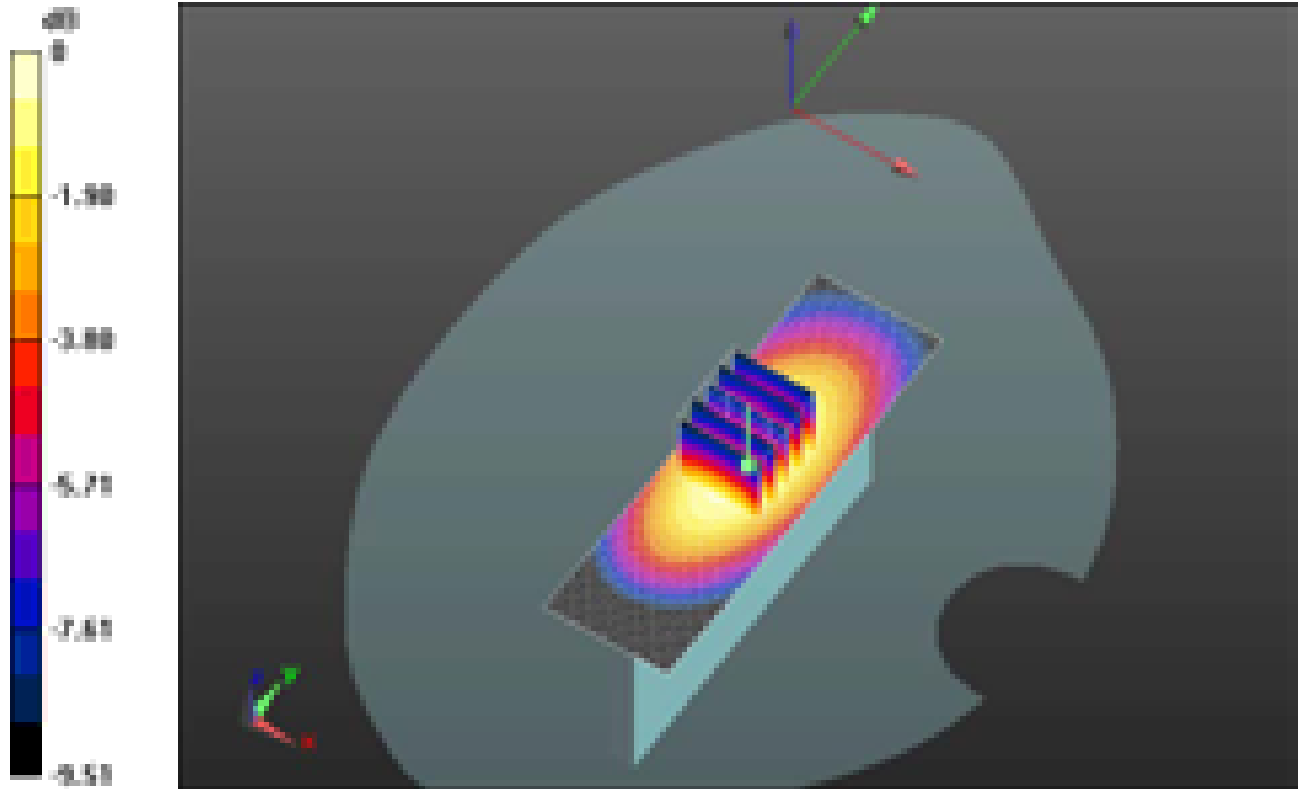

0 dB = 0.900mW/g = -0.92 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>48(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/8/2012 4:57:21 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_Offset\_4  
9\_amb\_temp\_23.2\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.225 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.050 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.3680


**SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.105 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.247 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>49(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

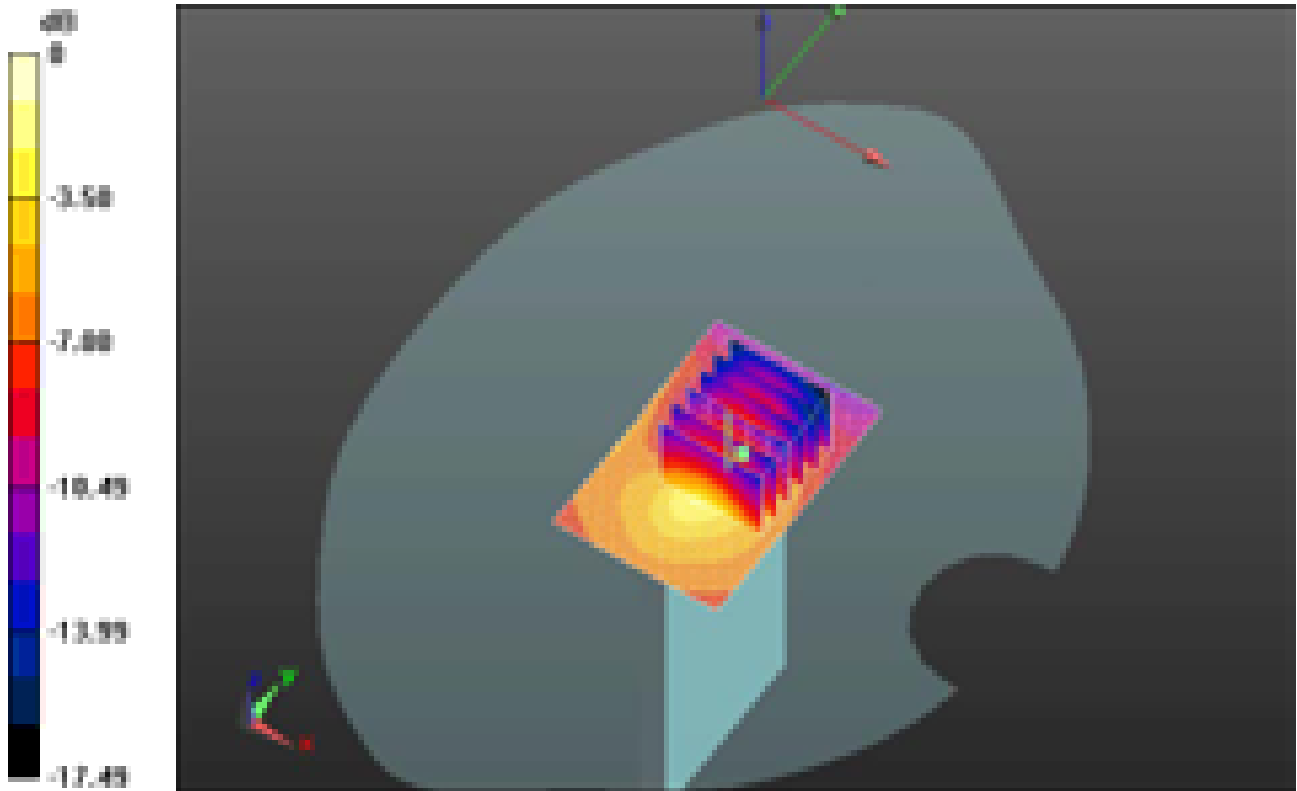

0 dB = 0.250mW/g = -12.04 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>50(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/8/2012 12:46:21 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_Headset\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_  
 Offset\_49\_amb\_temp\_22.9\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.826 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 24.580 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.0130

**SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.511 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.831 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>51(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

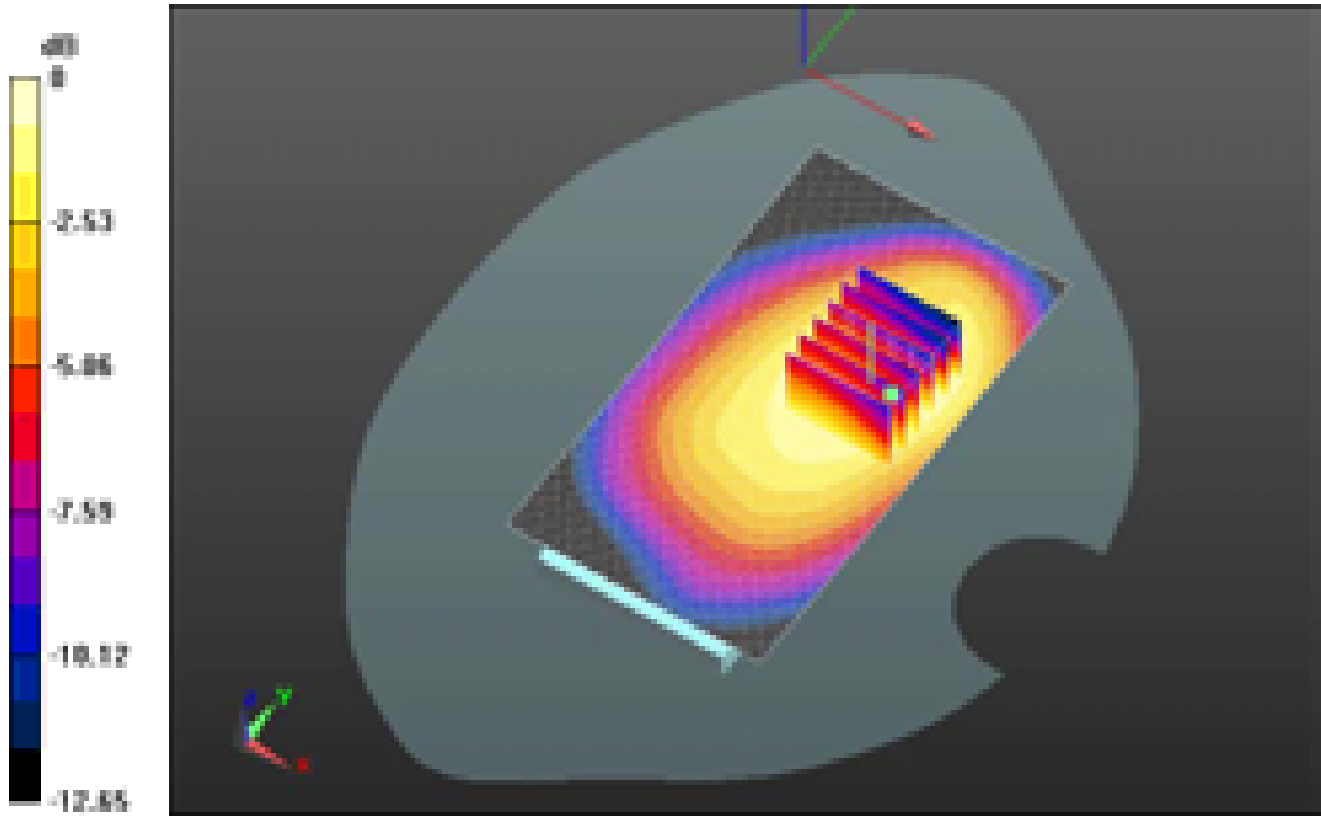

0 dB = 0.830mW/g = -1.62 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>52(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 9/25/2012 10:55:02 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_LTE\_5\_mid\_chan\_QPSK\_RB\_1\_Offset\_49\_amb\_temp\_24.4\_liq\_temp\_22.5C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: LTE 5; Frequency: 836.5 MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.949$  mho/m;  $\epsilon_r = 52.967$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.740 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 25.178 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.9270

**SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.493 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.741 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>53(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

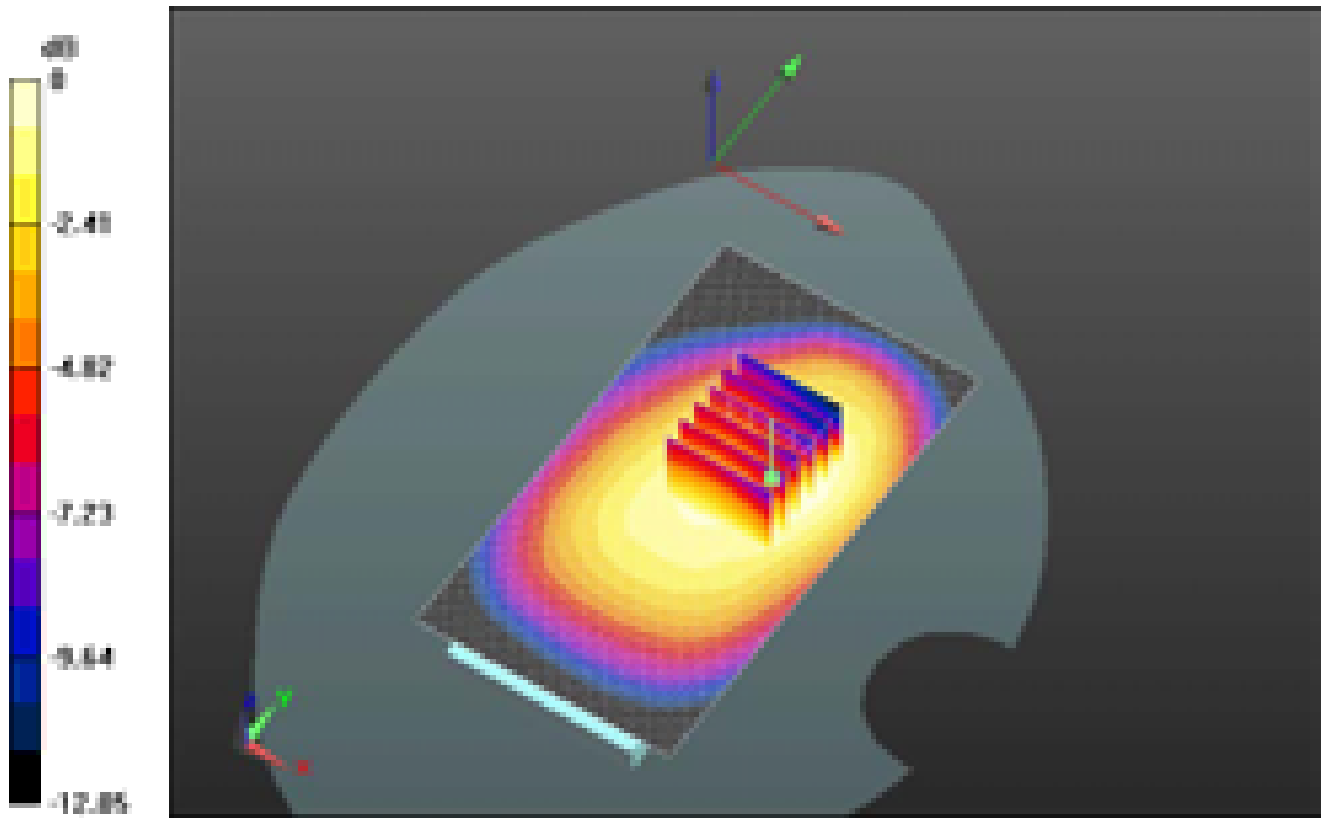

0 dB = 0.740mW/g = -2.62 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>54(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/7/2012 1:57:42 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_EDGE850\_mid\_chan\_amb\_temp\_22.7\_liq\_t  
emp\_21.1C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz  
 Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15\text{mm}$ ,  $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.844 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 26.152 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.0280  
**SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.527 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.825 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>55(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

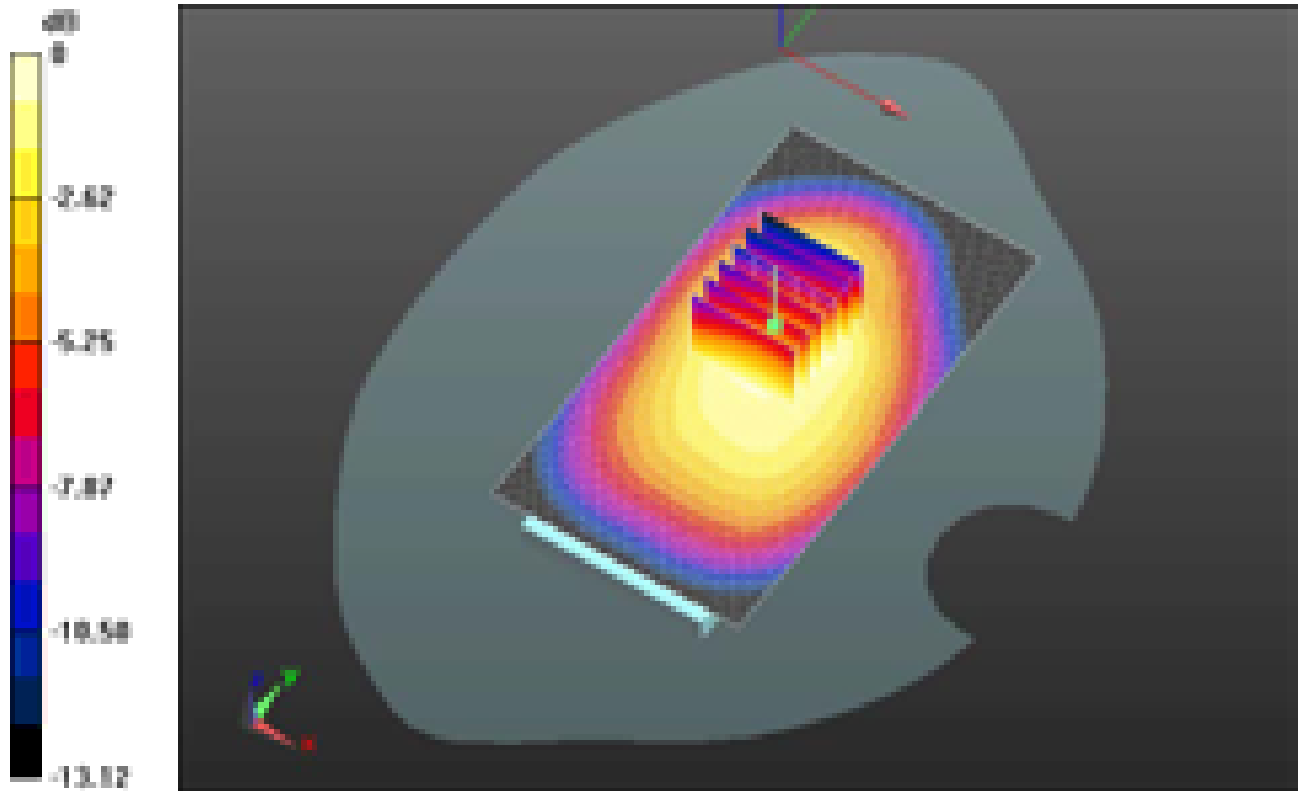

0 dB = 0.830mW/g = -1.62 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>56(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/7/2012 2:30:25 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_GPRS850\_mid\_chan\_amb\_temp\_23.0\_liq\_t  
emp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.880 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 26.240 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.0370


**SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.555 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.847 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>57(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

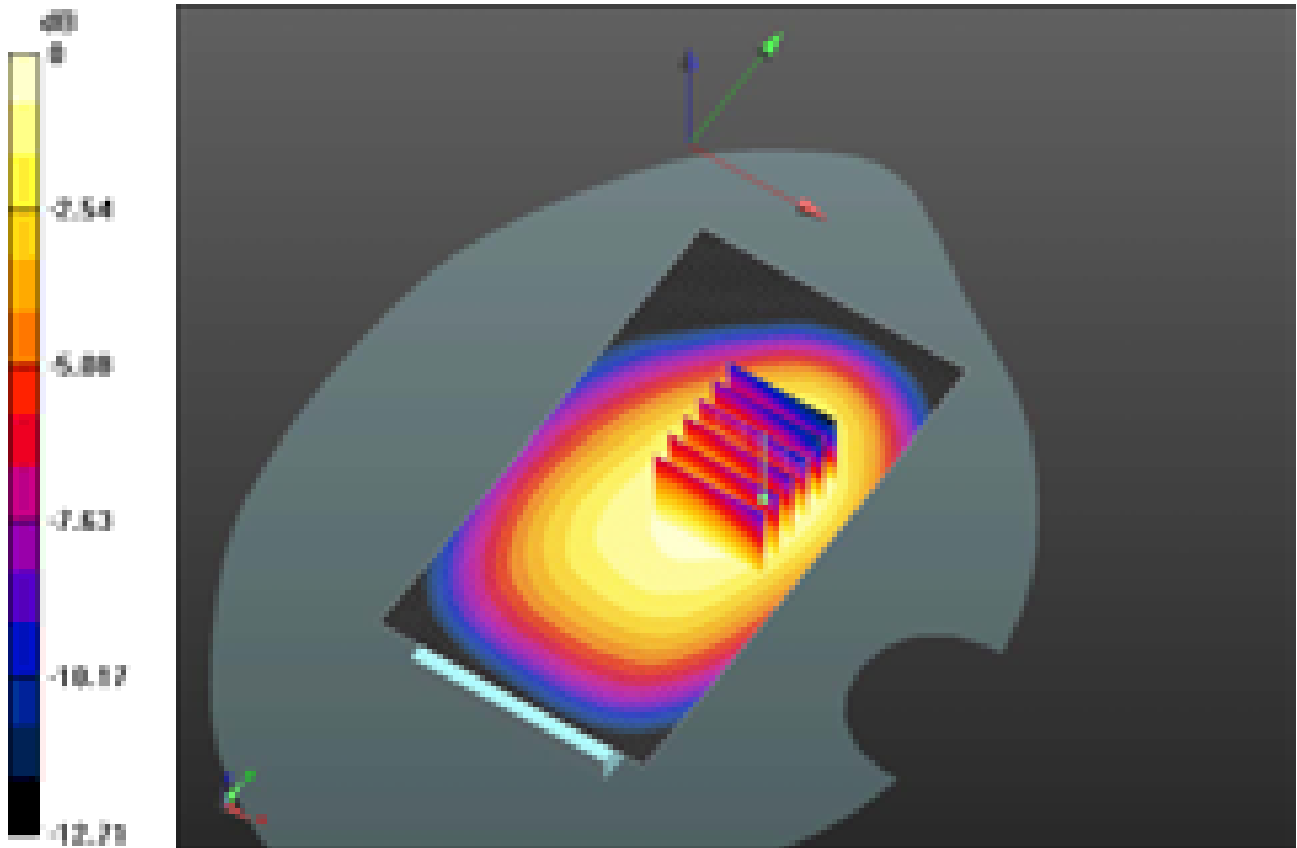

0 dB = 0.850mW/g = -1.41 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>58(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/7/2012 4:21:16 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_GPRS850\_mid\_chan\_amb\_temp\_23.0C\_liq\_t  
emp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.519 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 23.844 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.6390

**SAR(1 g) = 0.458 mW/g; SAR(10 g) = 0.316 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.522 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>59(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

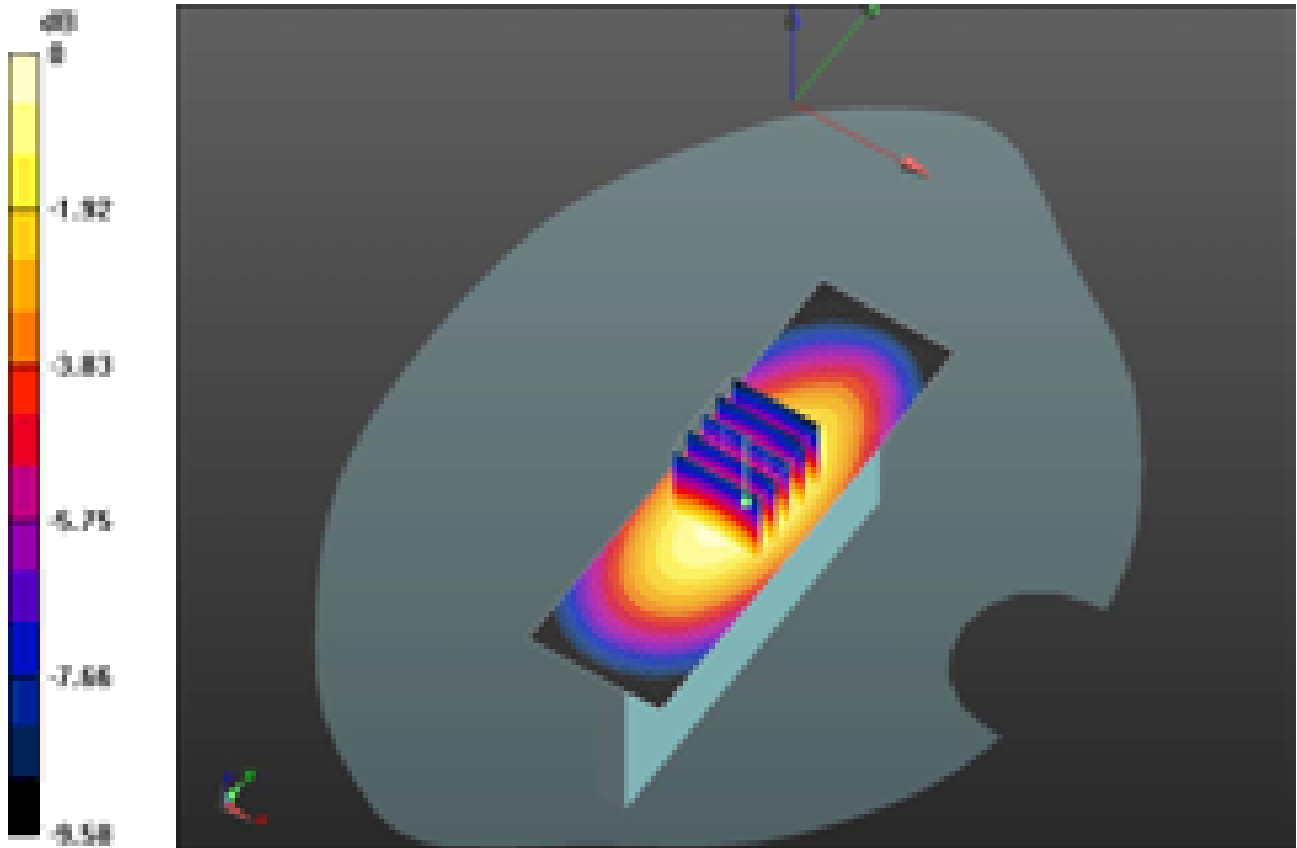

0 dB = 0.520mW/g = -5.68 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>60(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/7/2012 4:06:33 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_GPRS850\_mid\_chan\_amb\_temp\_23.0C\_liq  
\_temp\_21.6C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.773 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 28.461 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.9590

**SAR(1 g) = 0.683 mW/g; SAR(10 g) = 0.468 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.786 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>61(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

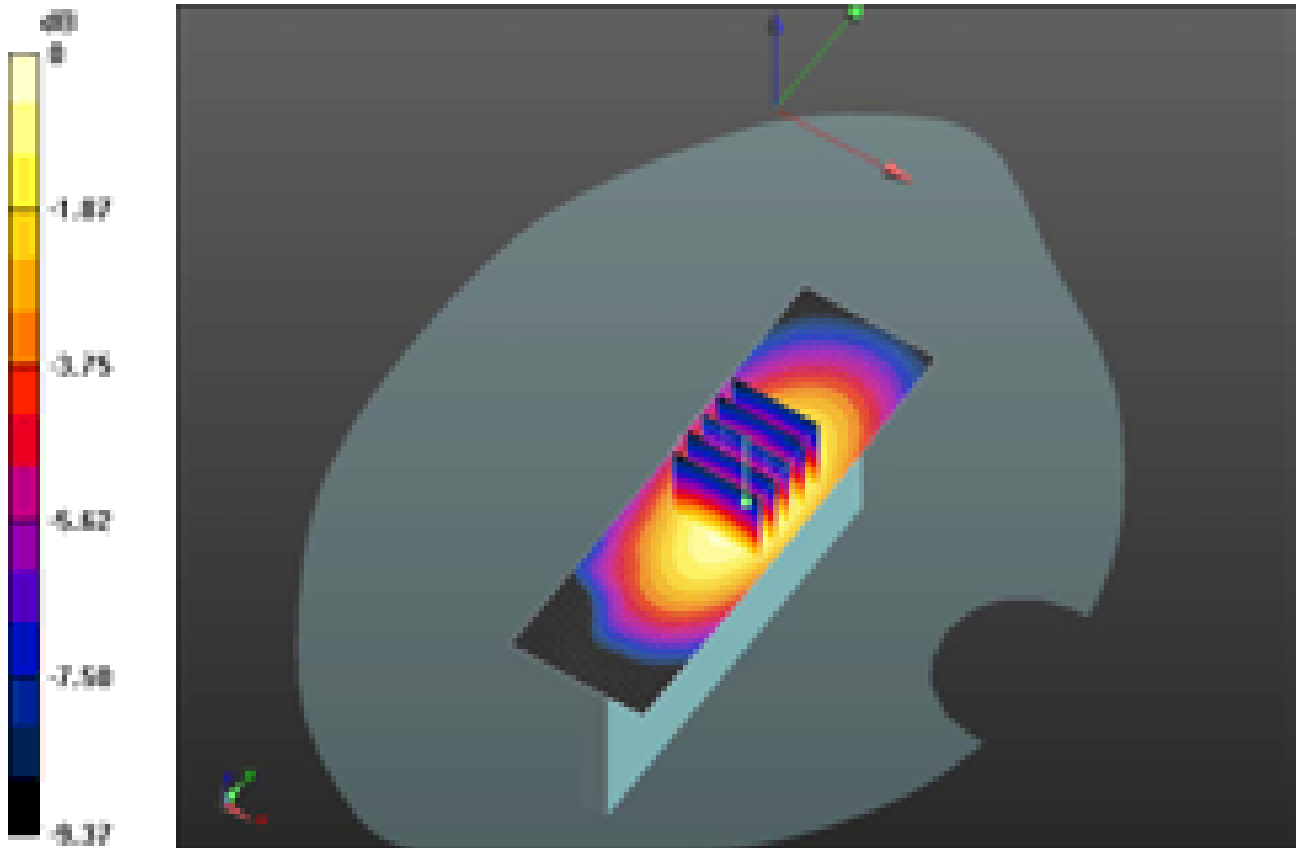

0 dB = 0.790mW/g = -2.05 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>62(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/7/2012 4:39:01 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_GPRS850\_mid\_chan\_amb\_temp\_23.0\_liq  
\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.281 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 16.907 V/m; Power Drift = -0.40 dB


Peak SAR (extrapolated) = 0.4020

**SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.112 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.274 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>63(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

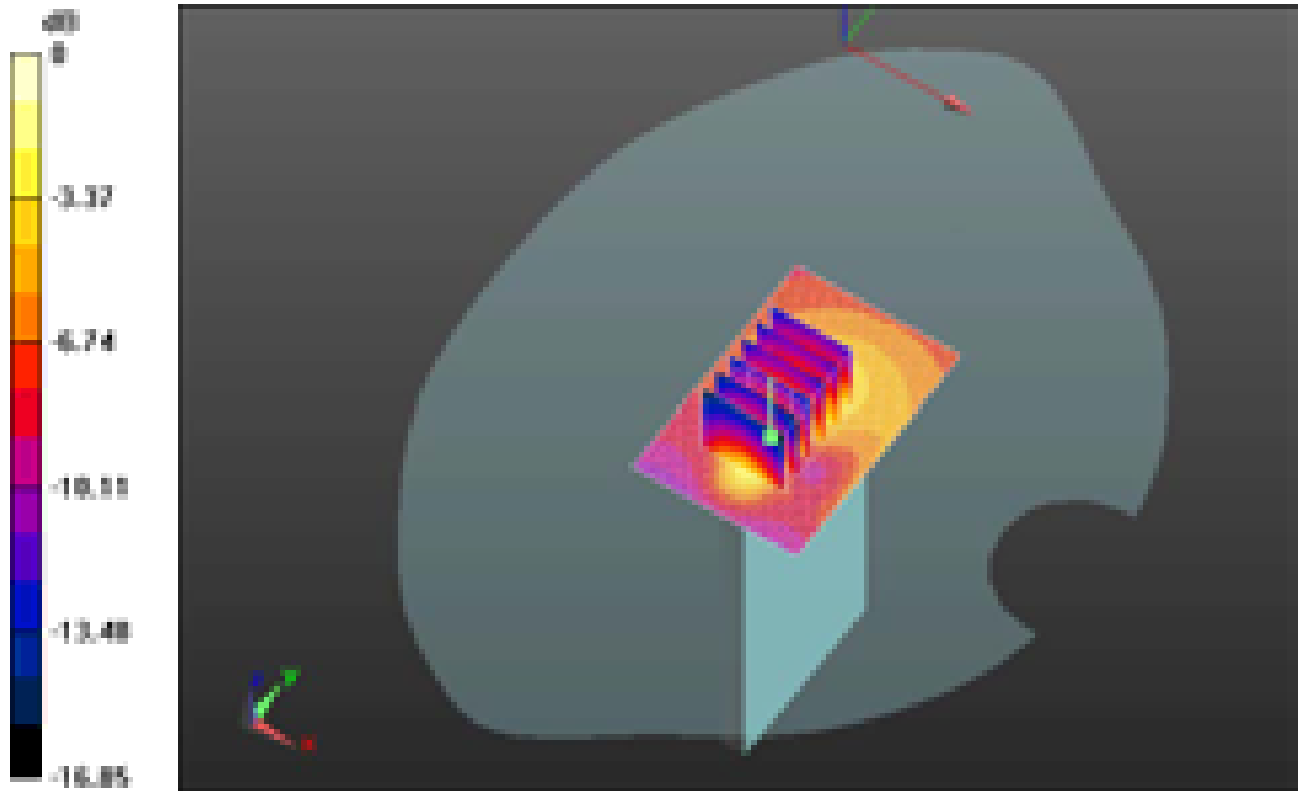

0 dB = 0.270mW/g = -11.37 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>64(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/7/2012 5:02:26 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_Headset\_GPRS850\_mid\_chan\_amb\_temp\_  
 23.1\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.787 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 23.323 V/m; Power Drift = 1.4e-005 dB


Peak SAR (extrapolated) = 0.9150


**SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.469 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.737 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>65(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

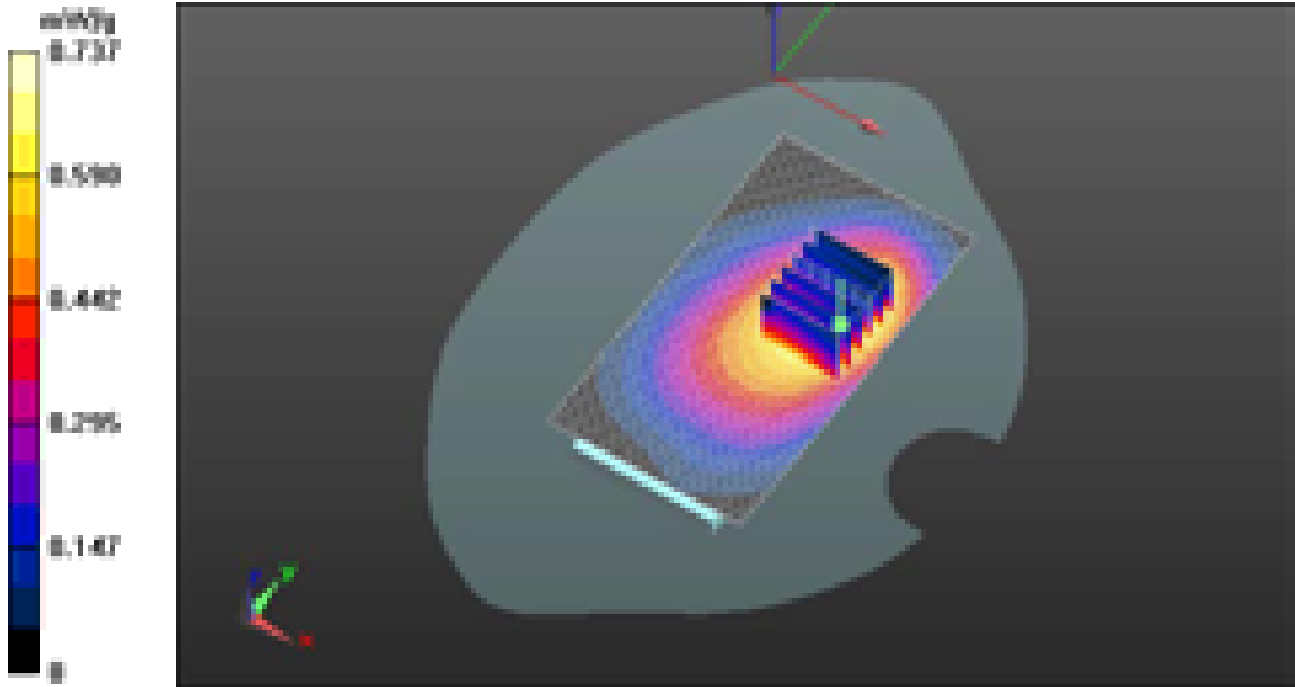

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>66(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/7/2012 12:49:26 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_EDGE850\_3-slots\_mid\_chan\_amb\_  
temp\_23.3\_liq\_temp\_21.1C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: EDGE 850 (3 slots); Frequency: 836.8 MHz  
Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15\text{mm}$ ,  $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.820 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 25.628 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 0.9840  
**SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.517 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.789 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>67(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

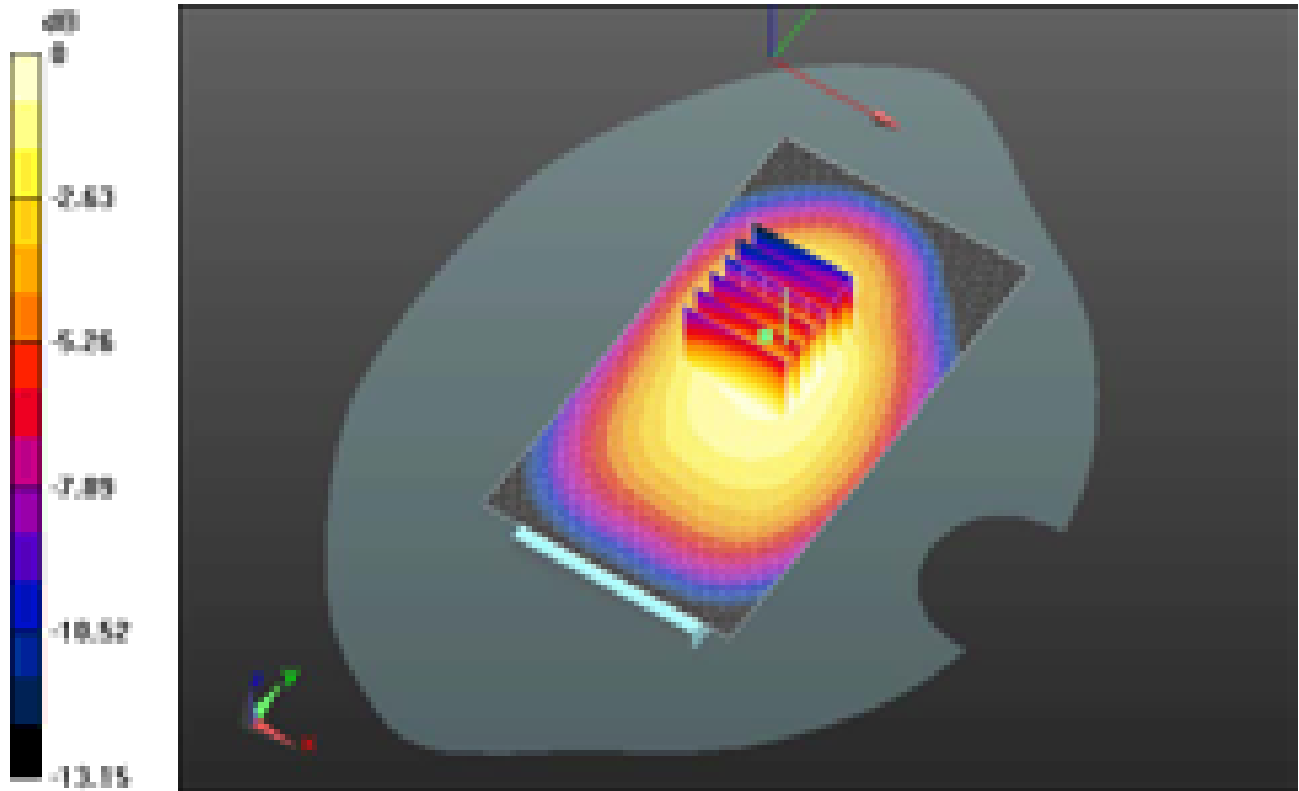

0 dB = 0.790mW/g = -2.05 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>68(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/7/2012 1:17:40 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_EDGE850\_4-slots\_mid\_chan\_amb\_  
temp\_23.3\_liq\_temp\_21.1C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: EDGE 850 (4 slots); Frequency: 836.8 MHz  
Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 52.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.663 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 24.054 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 0.8330  
**SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.430 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.660 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>69(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

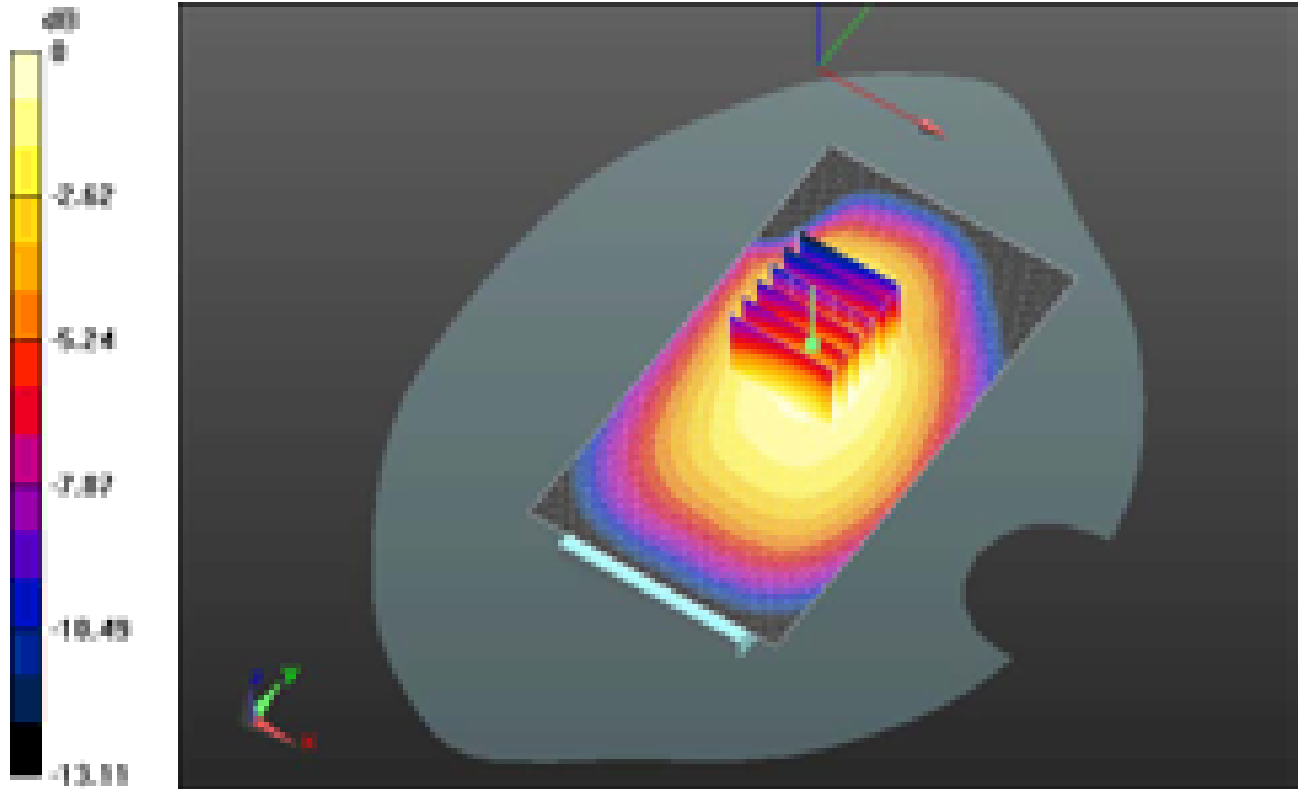

0 dB = 0.660mW/g = -3.61 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>70(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 9/21/2012 1:41:15 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_GPRS850\_mid\_chan\_amb\_temp\_23.9\_liq\_t  
emp\_22.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated):  $f = 836.8$  MHz;  $\sigma = 0.976$  mho/m;  $\epsilon_r = 54.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.980 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 28.268 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.2620

**SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.607 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.960 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>71(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

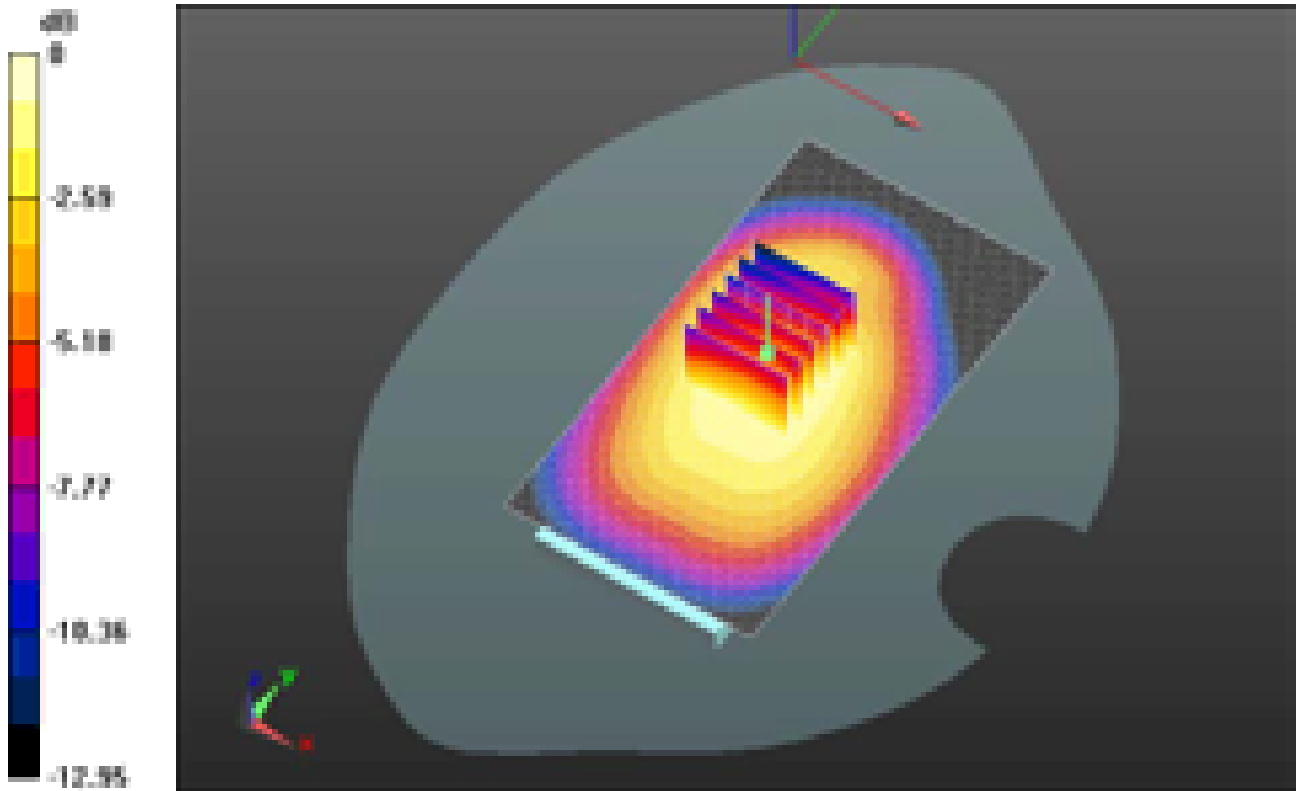

0 dB = 0.960mW/g = -0.35 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>72(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/5/2012 11:05:17 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_V\_low\_chan\_amb\_temp\_23.1  
\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 826.4 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.957$  mho/m;  $\epsilon_r = 53.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.979 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 28.300 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.2210


**SAR(1 g) = 0.866 mW/g; SAR(10 g) = 0.625 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.975 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>73(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

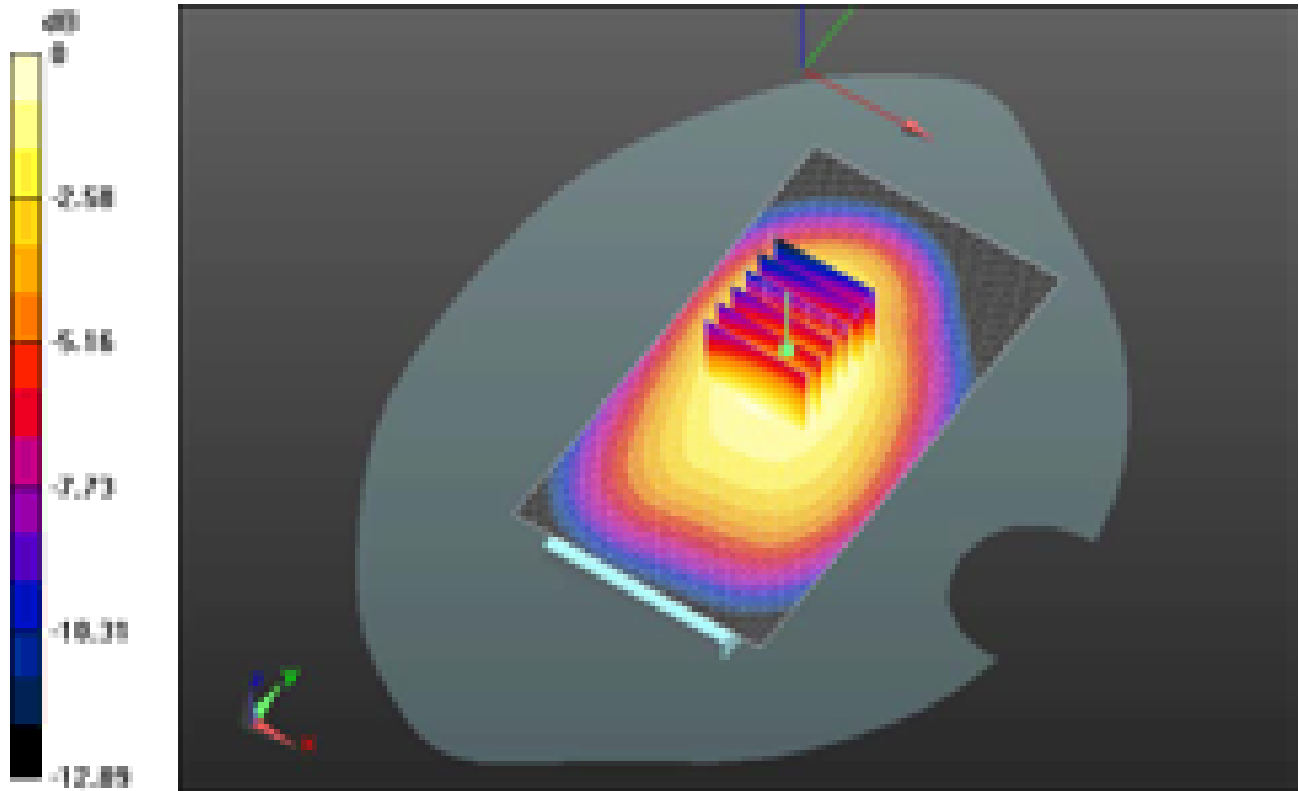

0 dB = 0.970mW/g = -0.26 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>74(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/5/2012 10:45:42 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_V\_mid\_chan\_amb\_temp\_23.2  
\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.966$  mho/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.026 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 29.132 V/m; Power Drift = -0.0077 dB


Peak SAR (extrapolated) = 1.2910

**SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.660 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.039 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>75(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

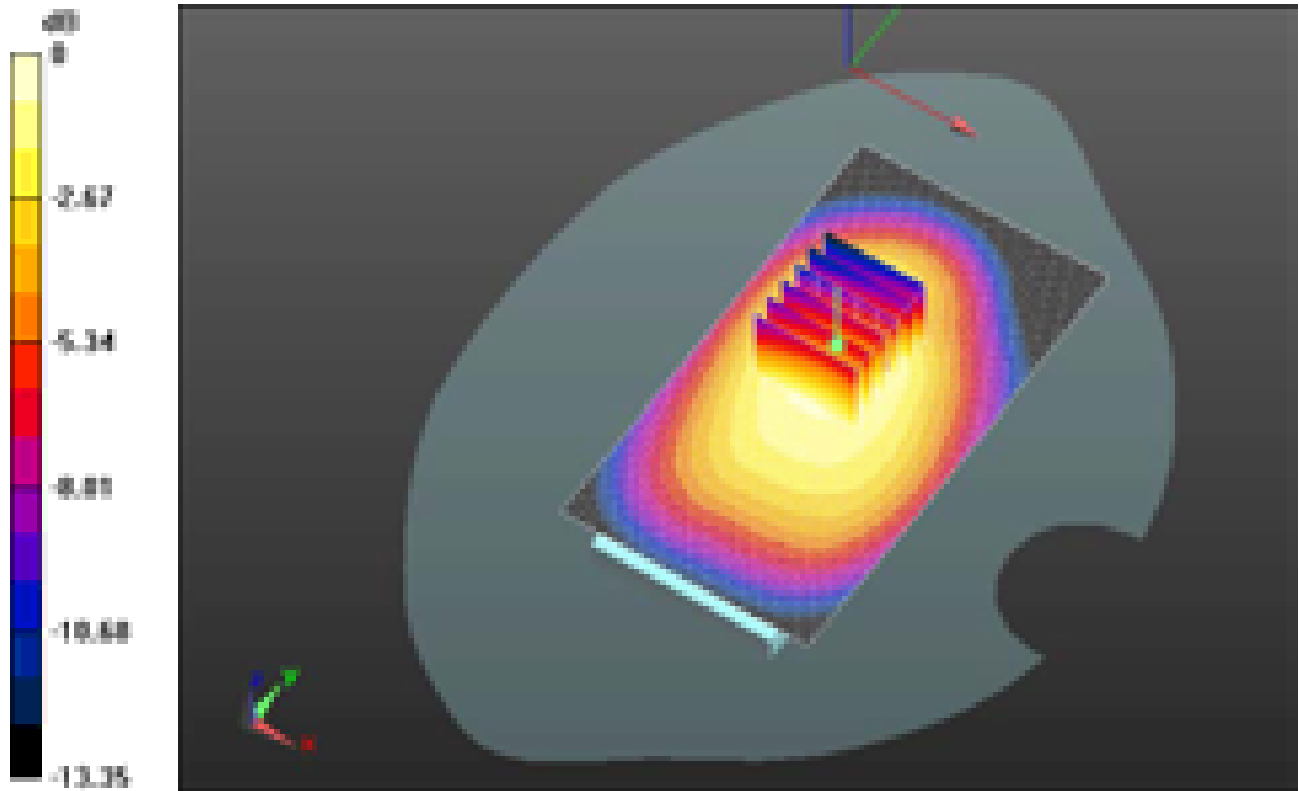

0 dB = 1.040mW/g = 0.34 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>76(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/5/2012 11:24:35 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_V\_high\_chan\_amb\_temp\_23.3  
\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 846.6 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.976$  mho/m;  $\epsilon_r = 53.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.753 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 25.104 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.9510

**SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.487 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.758 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>77(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

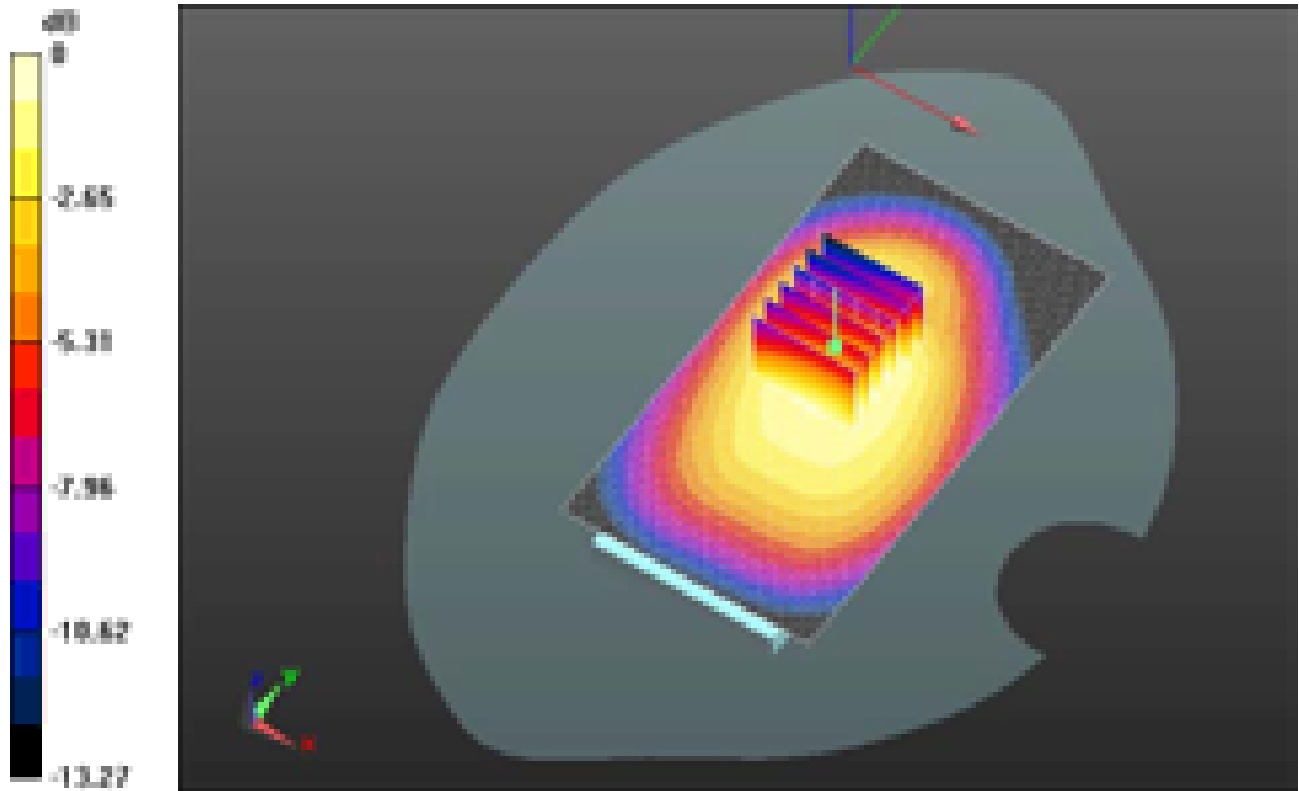

0 dB = 0.760mW/g = -2.38 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>78(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/6/2012 1:01:04 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_UMTS\_Band\_V\_low\_chan\_amb\_temp\_23.3  
\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 826.4 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.957$  mho/m;  $\epsilon_r = 53.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.913 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 28.185 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.1140

**SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.610 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.930 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>79(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

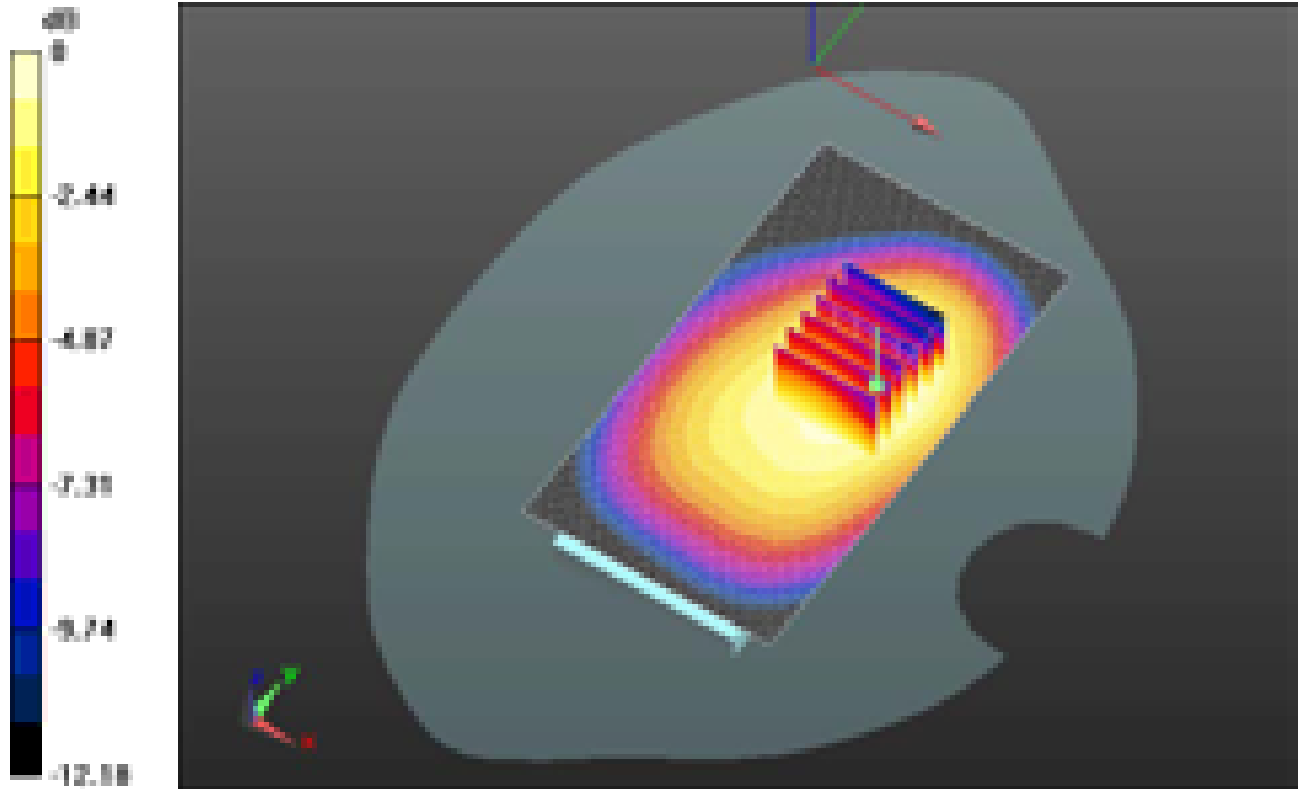

0 dB = 0.930mW/g = -0.63 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>80(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/6/2012 12:26:42 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_UMTS\_Band\_V\_mid\_chan\_amb\_temp\_23.0  
\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.966$  mho/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.969 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 28.385 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.1690


**SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.644 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.979 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>81(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

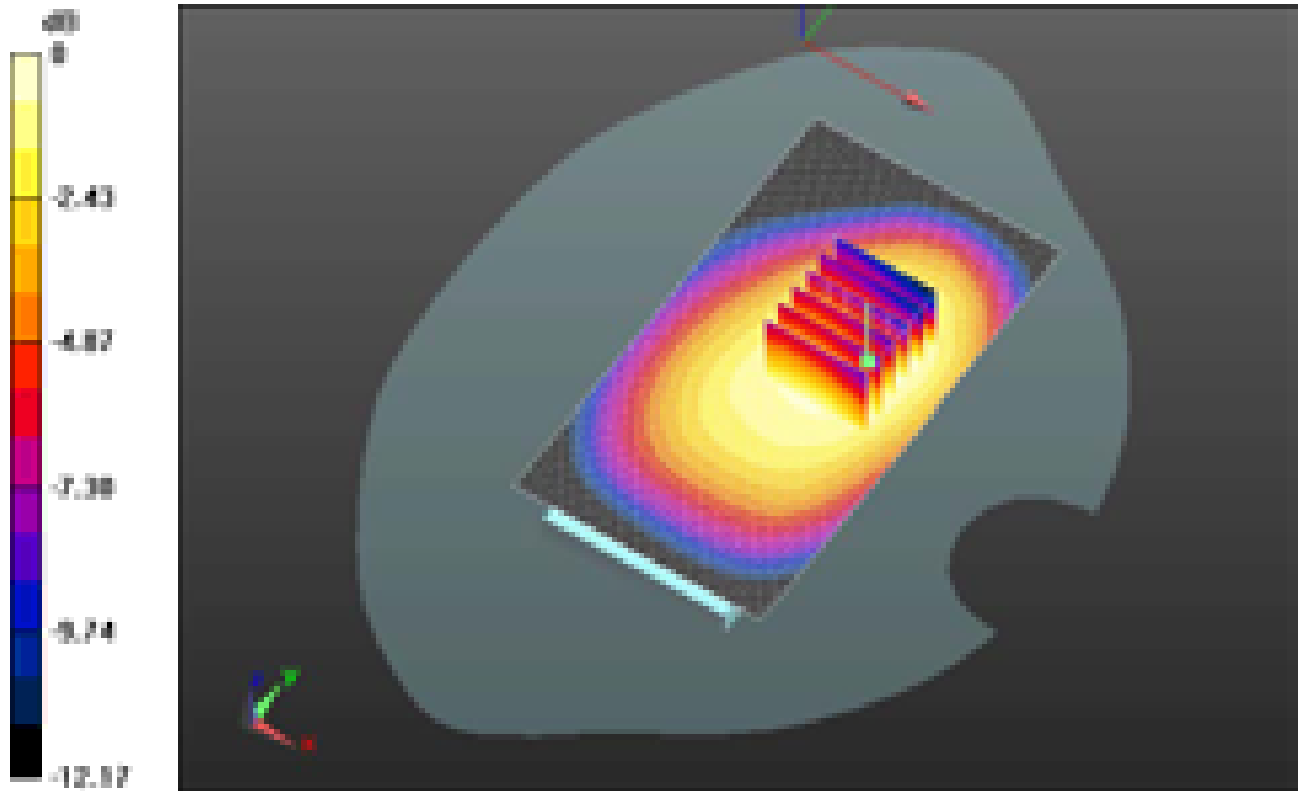

0 dB = 0.980mW/g = -0.18 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>82(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/6/2012 1:22:10 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_UMTS\_Band\_V\_high\_chan\_amb\_temp\_23.  
 3\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 846.6 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.976$  mho/m;  $\epsilon_r = 53.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.732 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 25.012 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.8700

**SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.480 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.720 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>83(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

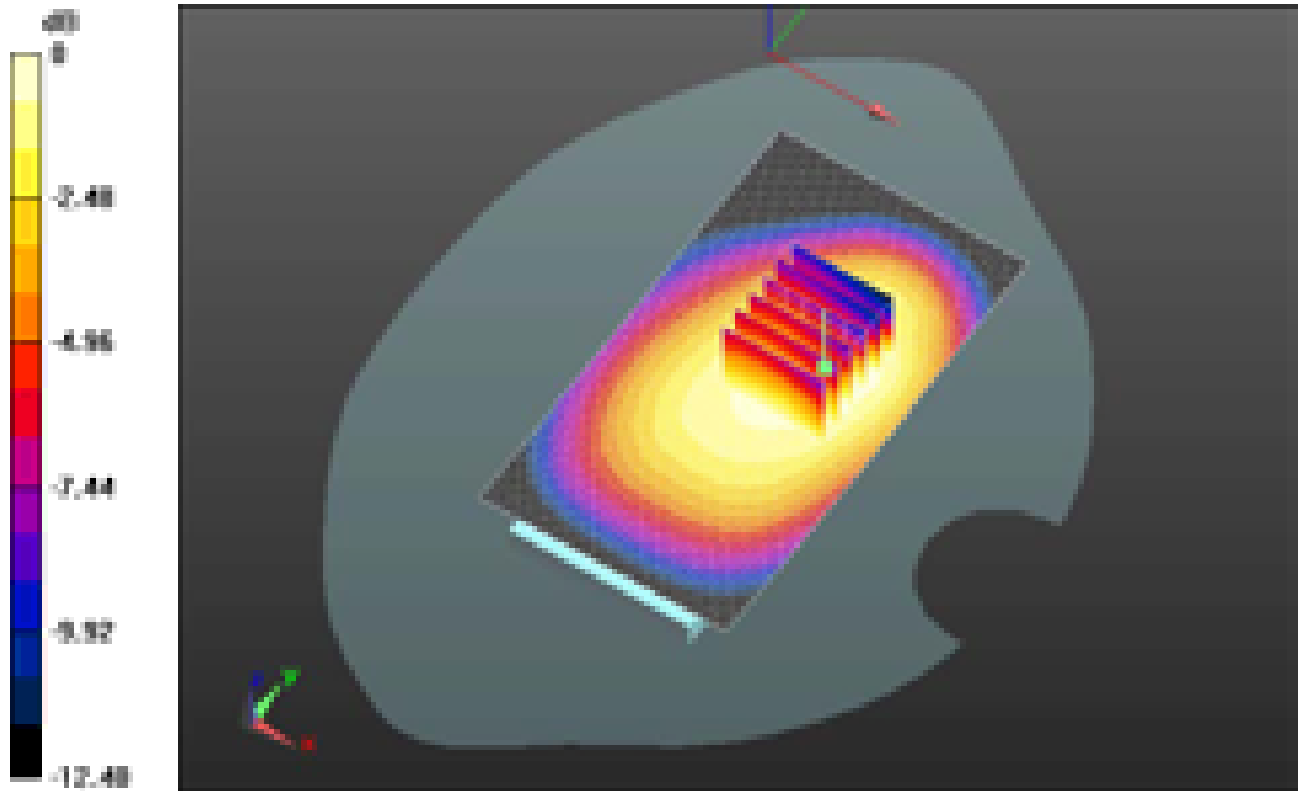

0 dB = 0.720mW/g = -2.85 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>84(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/5/2012 10:26:17 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_UMTS\_Band\_V\_mid\_chan\_amb\_temp\_23.1C  
\_liq\_temp\_21.2C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.966$  mho/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.644 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 26.641 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.8090

**SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.397 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.666 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>85(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

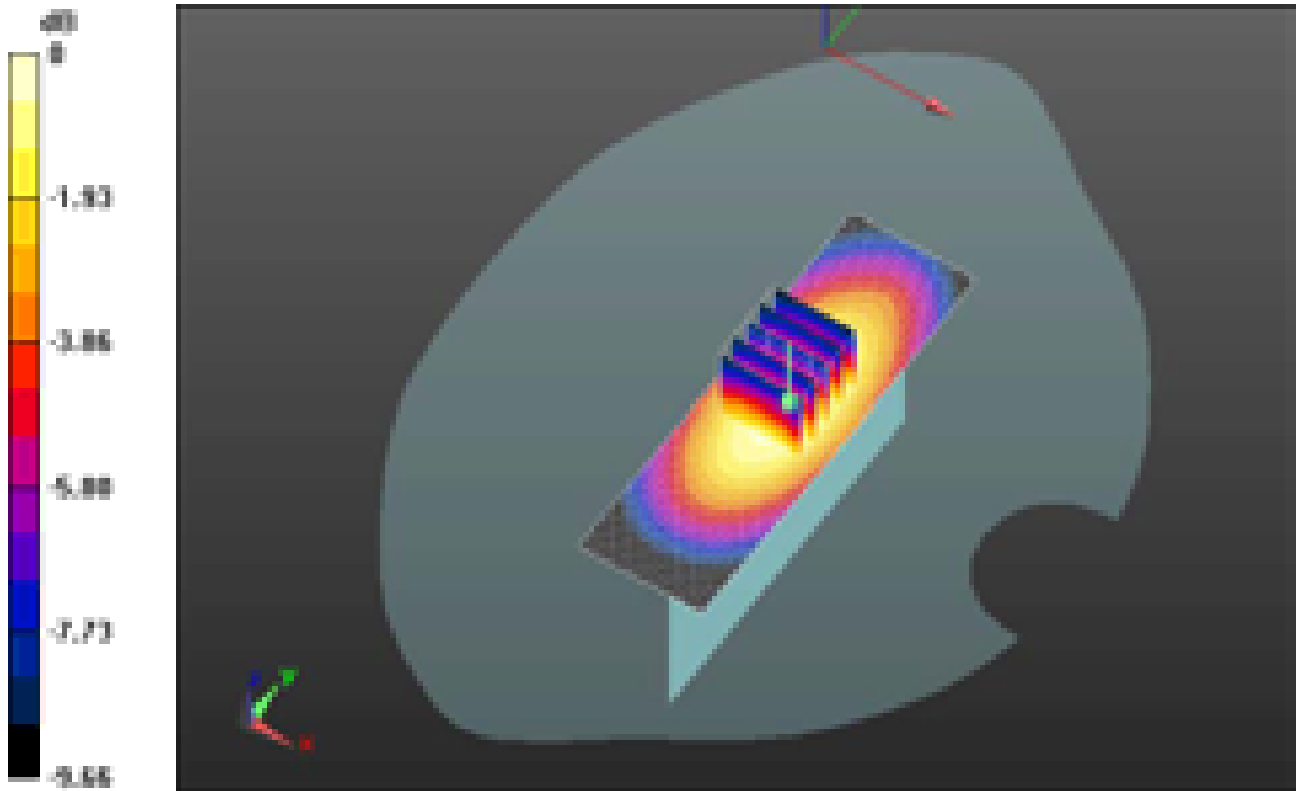

0 dB = 0.670mW/g = -3.48 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>86(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/5/2012 10:11:32 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_UMTS\_Band\_V\_mid\_chan\_amb\_temp\_22.8  
C\_liq\_temp\_21.2C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.966$  mho/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.902 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 30.950 V/m; Power Drift = 0.0076 dB


Peak SAR (extrapolated) = 1.1000

**SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.548 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.901 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>87(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

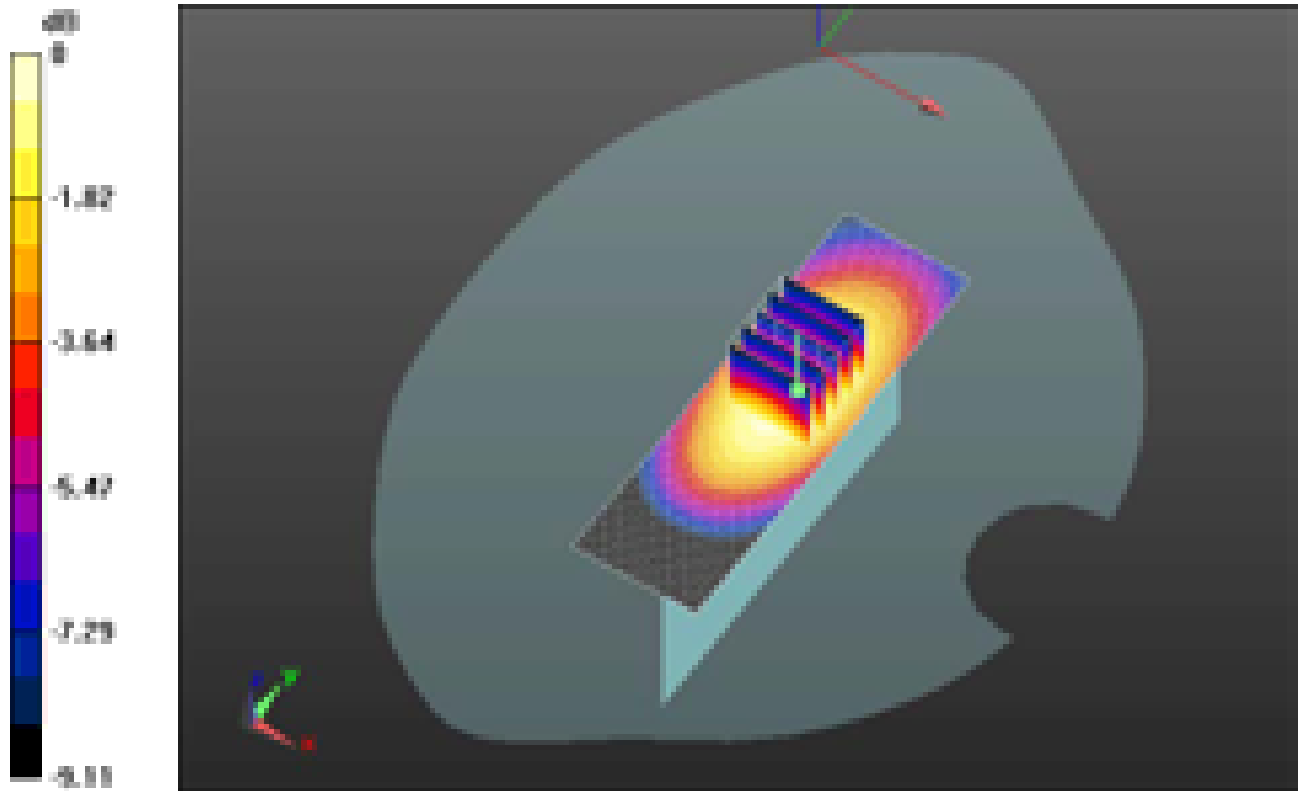

0 dB = 0.900mW/g = -0.92 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>88(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/5/2012 9:49:01 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_UMTS\_Band\_V\_mid\_chan\_amb\_temp\_22  
.8\_liq\_temp\_21.2C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.966$  mho/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.234 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.127 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.3540


**SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.107 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.248 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>89(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

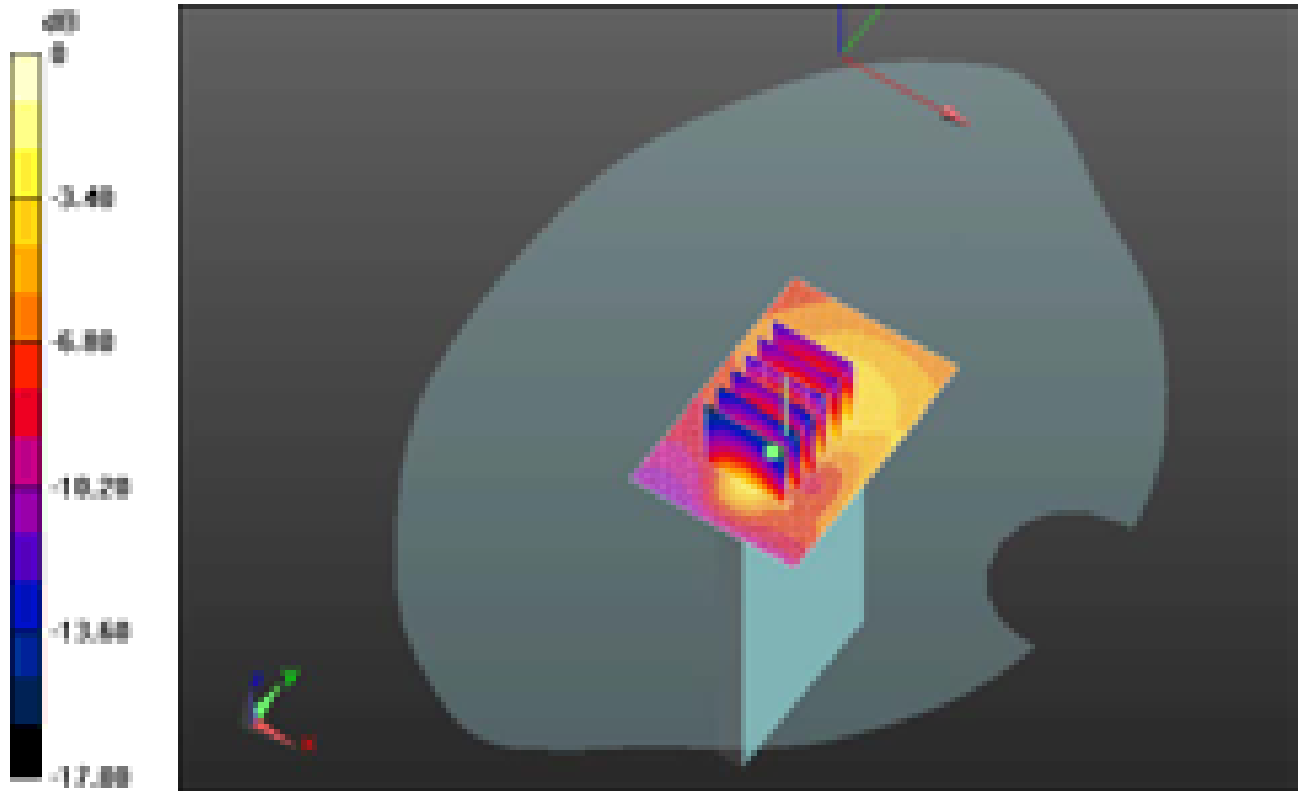

0 dB = 0.250mW/g = -12.04 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>90(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/6/2012 2:05:30 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_Headset\_UMTS\_Band\_V\_mid\_chan\_amb\_t  
emp\_23.3\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.966$  mho/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.935 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 25.642 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.1400

**SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.573 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.903 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>91(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

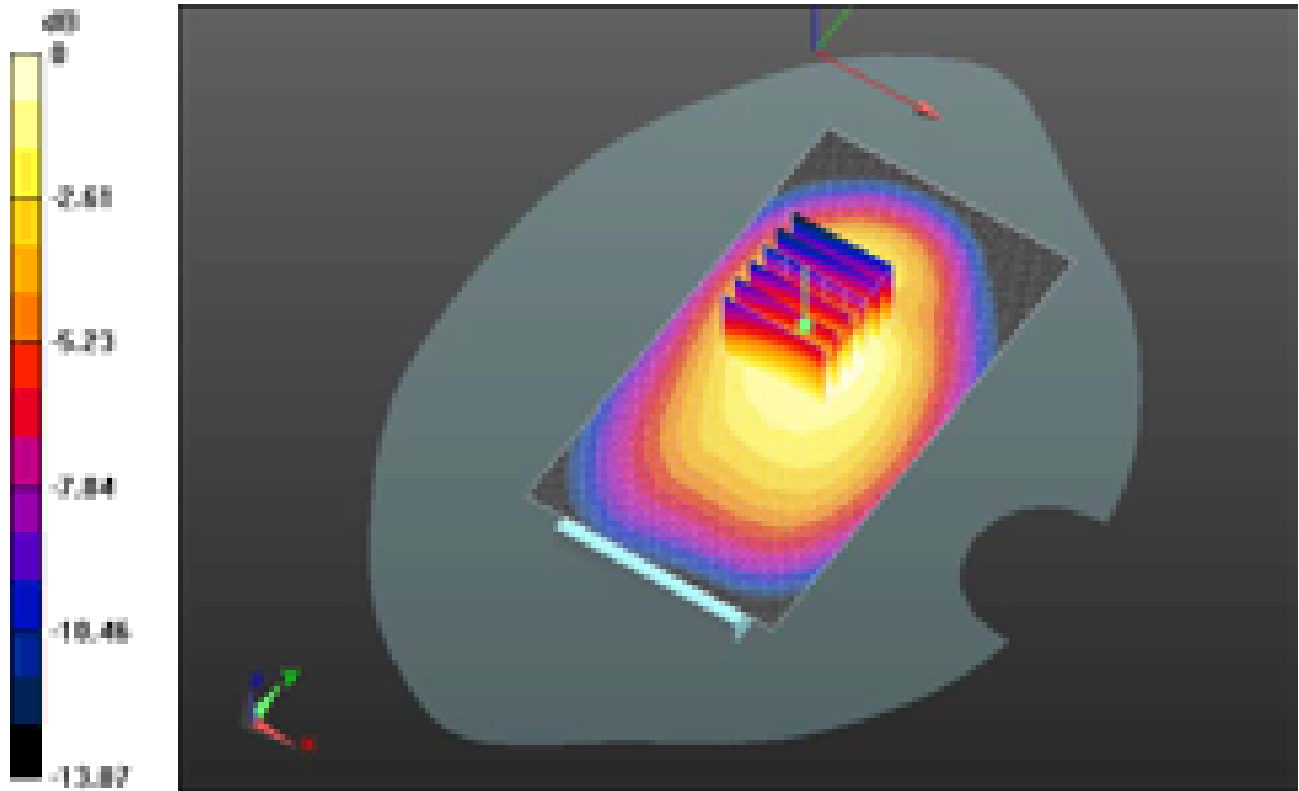

0 dB = 0.900mW/g = -0.92 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>92(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 9/21/2012 1:41:15 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_V\_mid\_chan\_amb\_temp\_23.9  
\_liq\_temp\_22.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.975$  mho/m;  $\epsilon_r = 54.209$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.892 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 27.218 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.1090

**SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.569 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.877 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>93(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

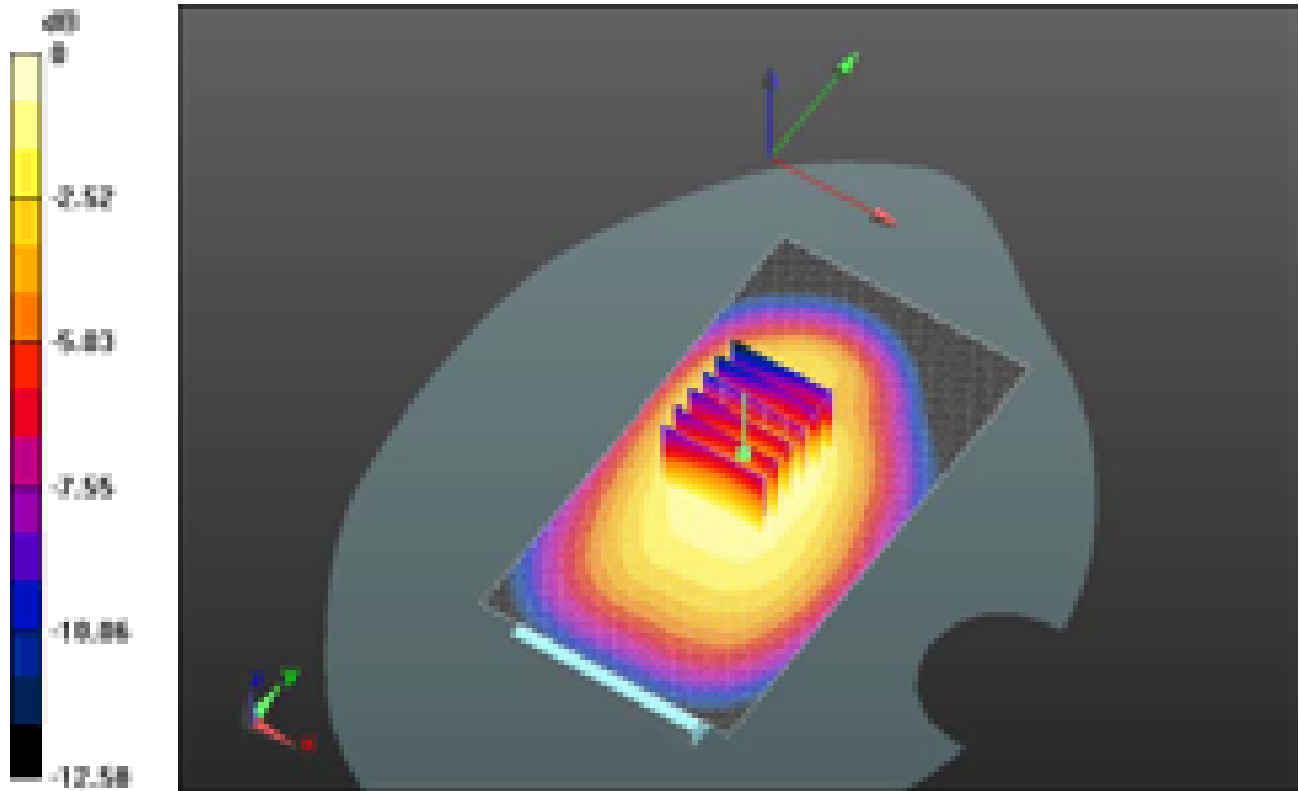

0 dB = 0.880mW/g = -1.11 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>94(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 8:48:38 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_23.5\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.919 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.640 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 2.5230

**SAR(1 g) = 1.5 mW/g; SAR(10 g) = 0.909 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.829 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>95(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

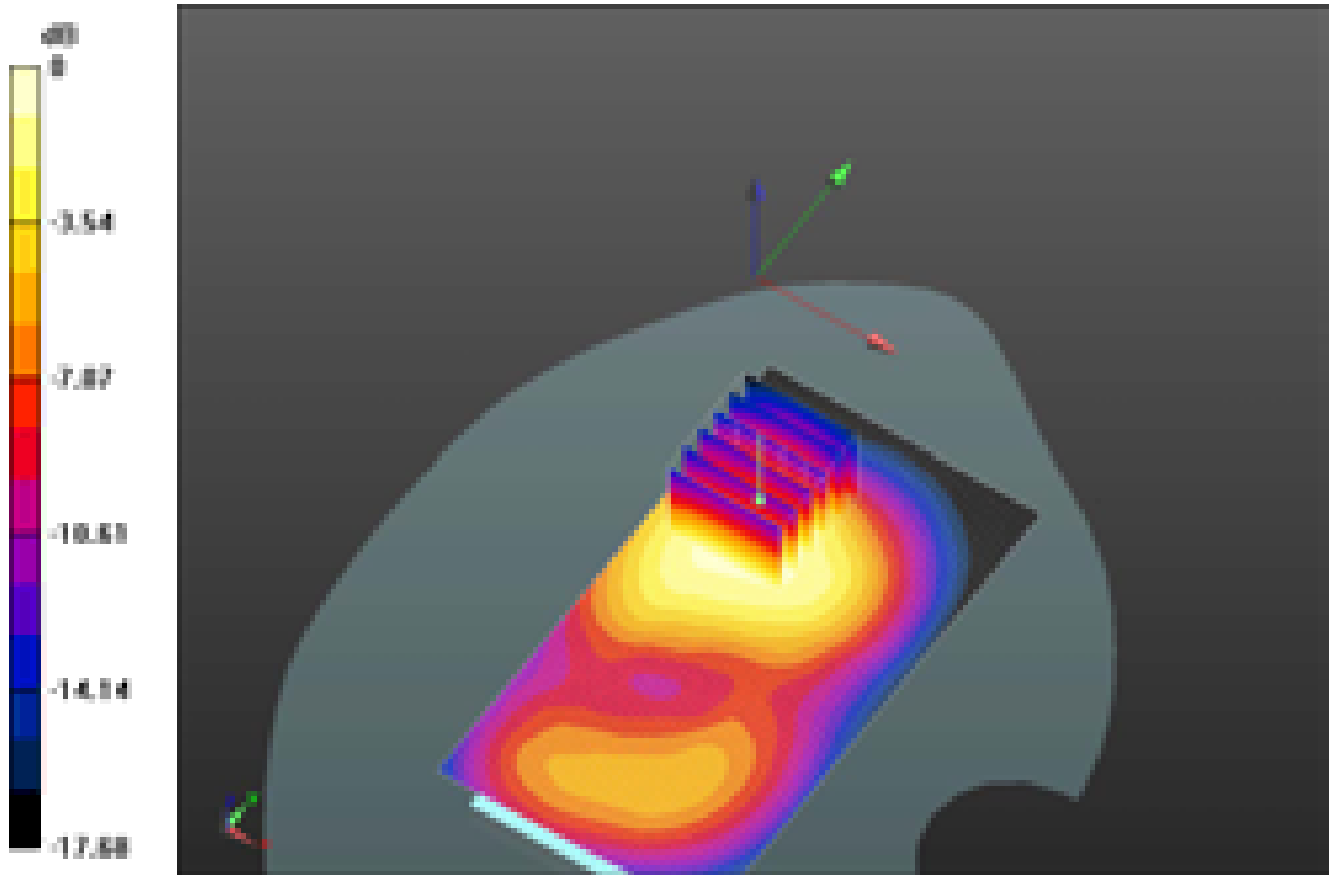

0 dB = 1.830mW/g = 5.25 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>96(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 9:08:42 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_99\_amb\_temp\_22.8\_liq\_temp\_21.6C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.738 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 12.047 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.3260


**SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.805 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.689 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>97(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

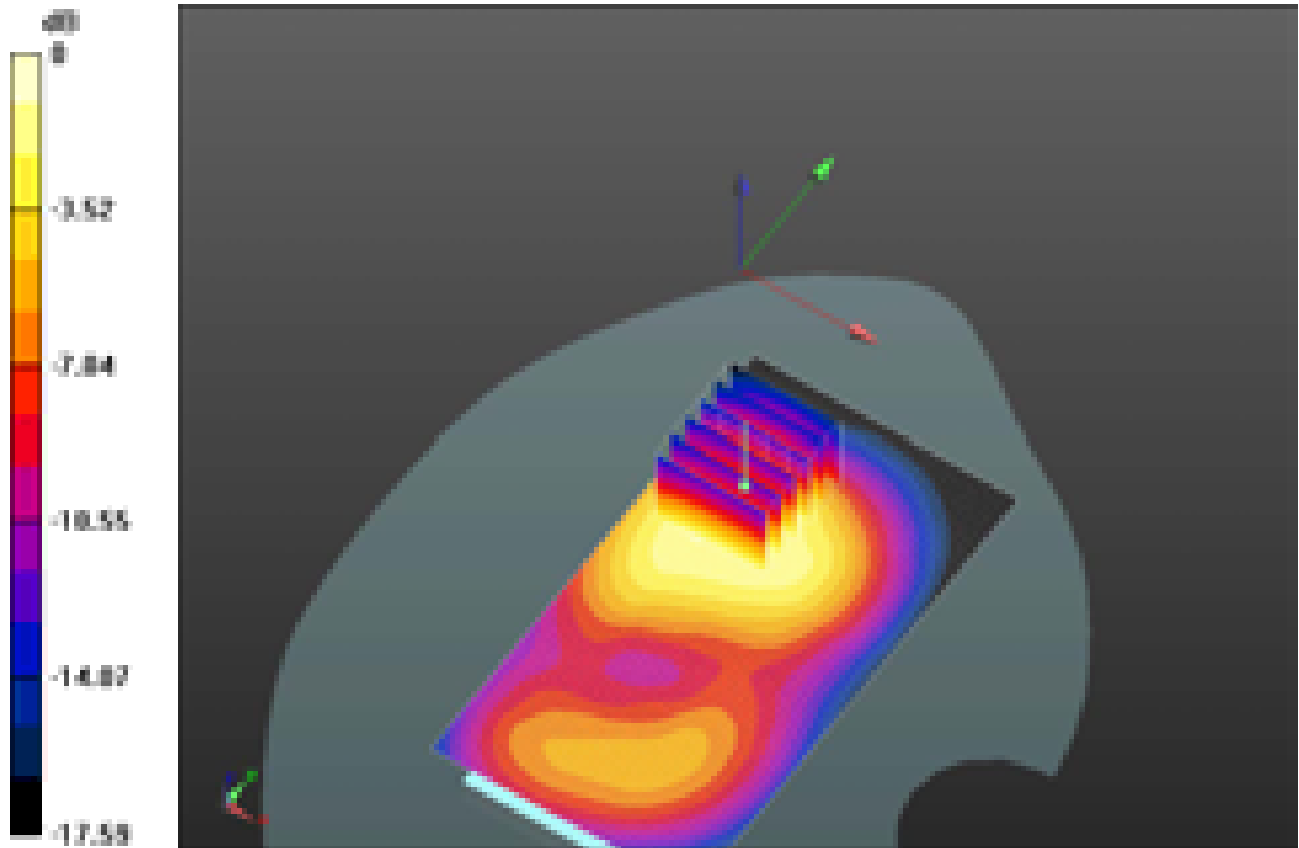

0 dB = 1.690mW/g = 4.56 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>98(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 12:17:58 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_RB\_50\_Offset\_0\_amb\_temp\_22.8\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.561 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.612 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.9530

**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.671 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.331 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>99(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

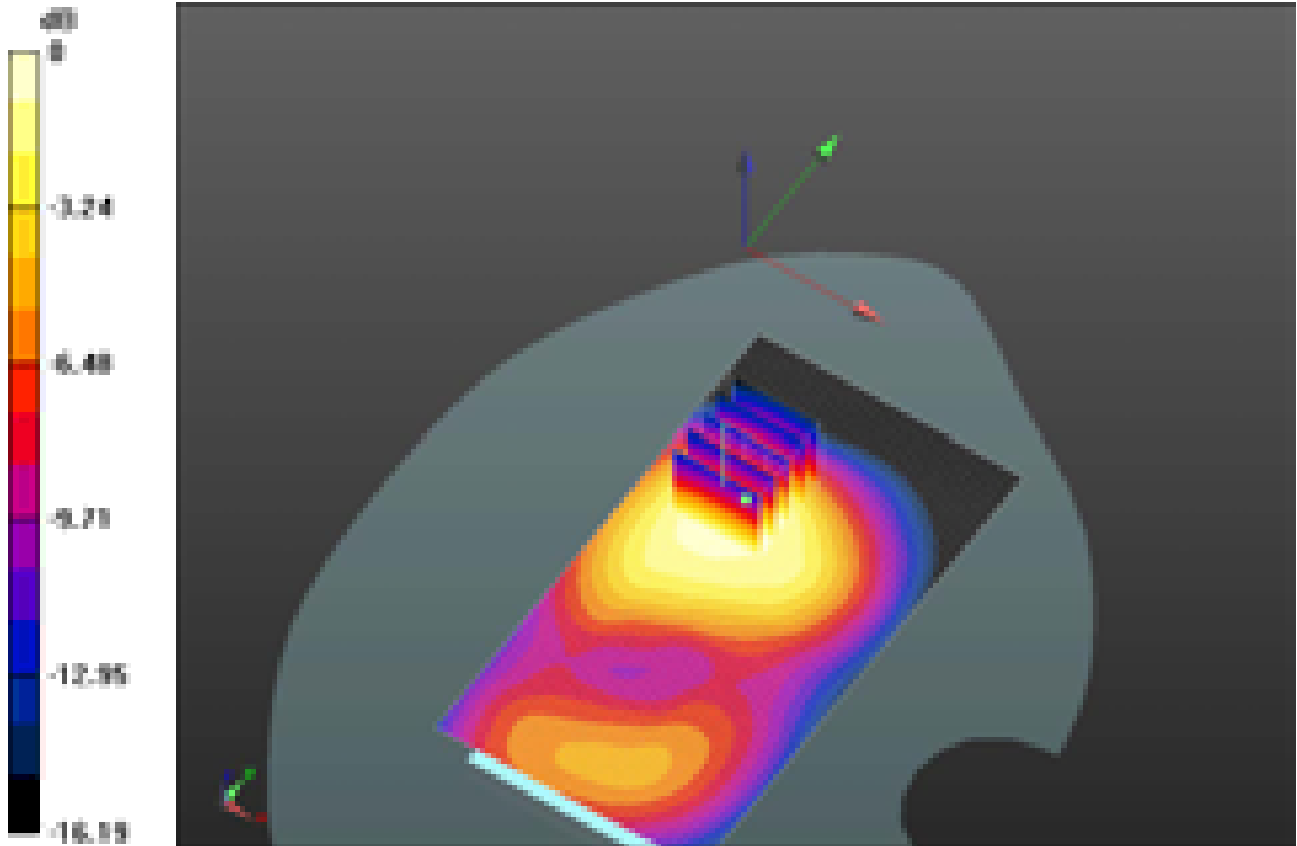

0 dB = 1.330mW/g = 2.48 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>100(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>

Date/Time: 6/14/2012 12:46:47 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset\_0\_amb\_temp\_23.0\_liq\_temp\_21.7C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.446 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 10.544 V/m; Power Drift = -0.28 dB


Peak SAR (extrapolated) = 1.7470

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.634 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.243 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>101(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

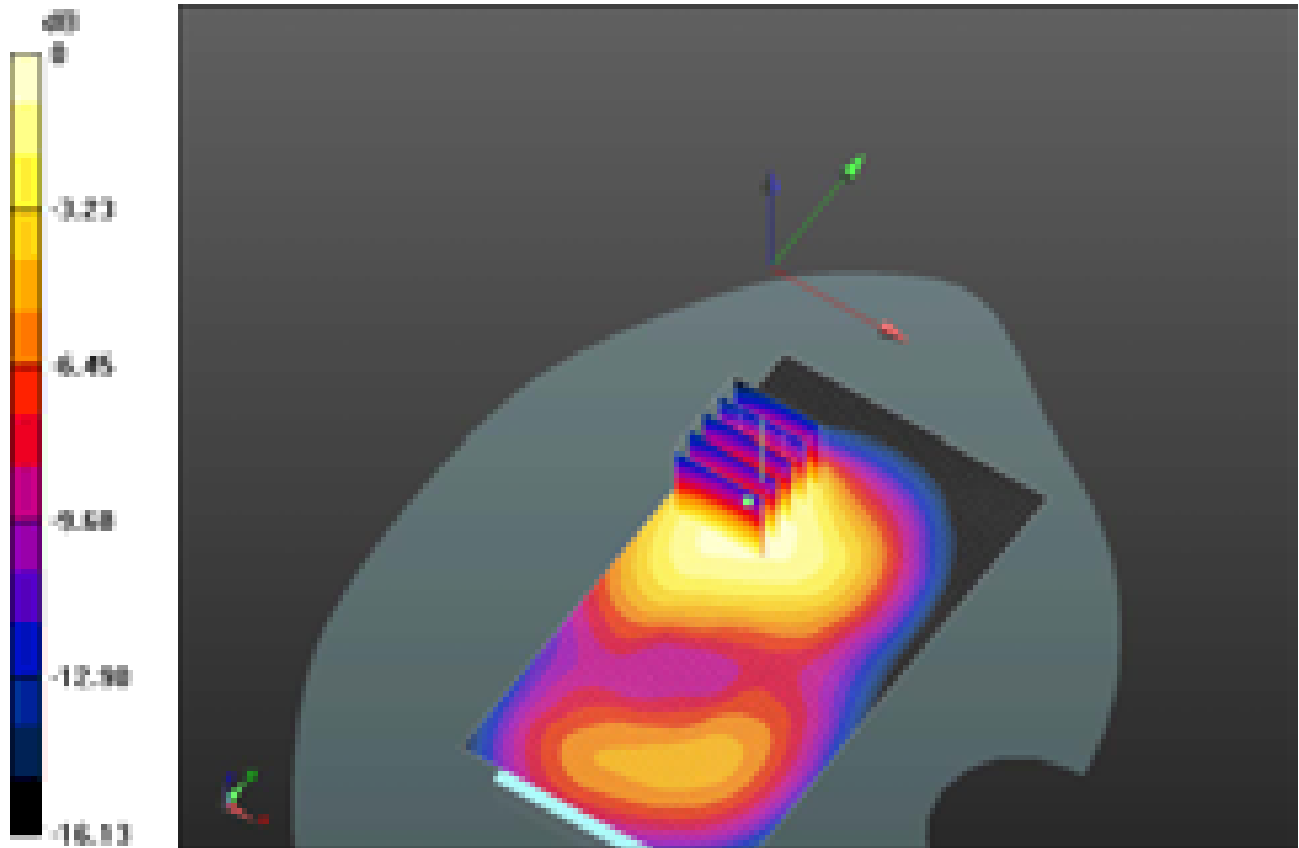

0 dB = 1.240mW/g = 1.87 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>102(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 2:55:25 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset\_99  
\_amb\_temp\_22.9\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.499 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 11.667 V/m; Power Drift = -0.29 dB


Peak SAR (extrapolated) = 1.9700

**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.692 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.443 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>103(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

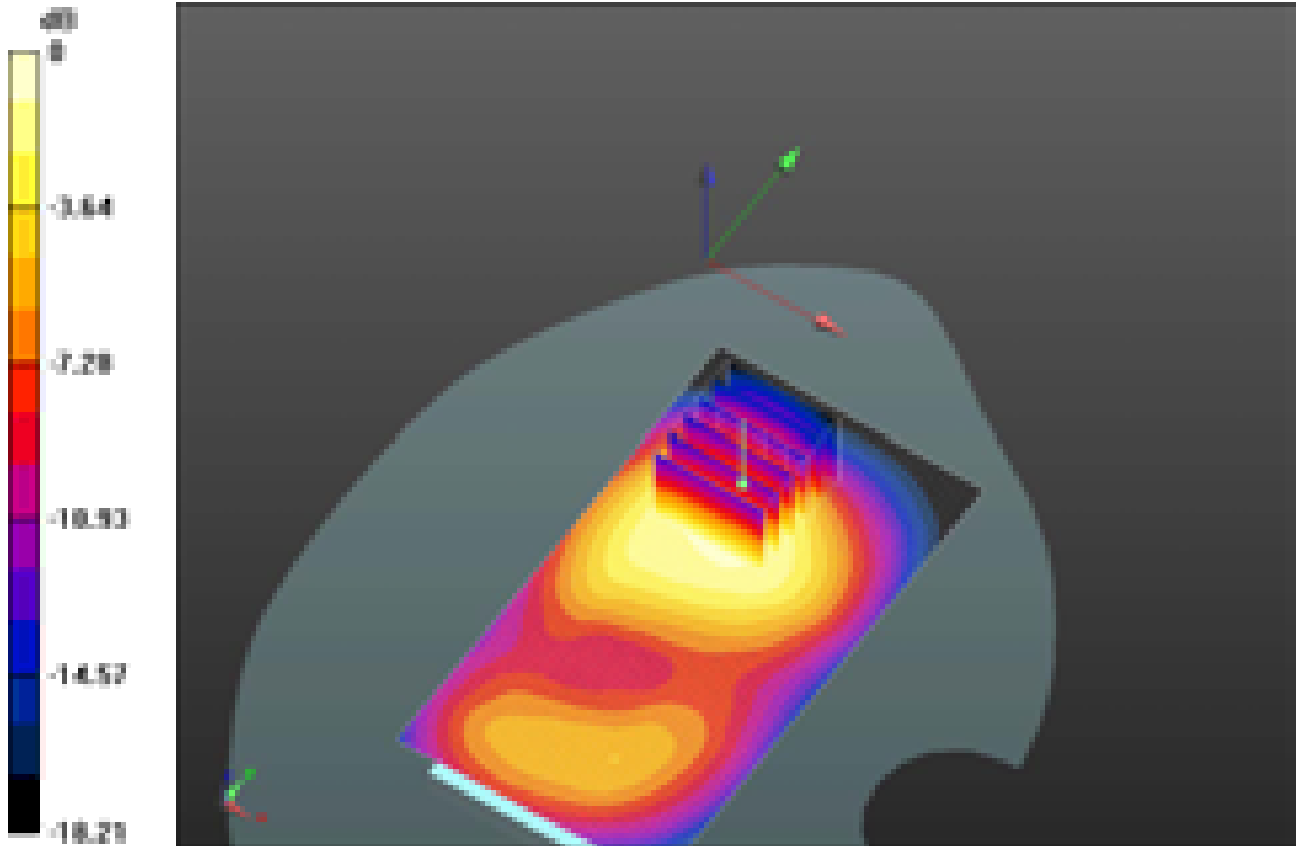

0 dB = 1.440mW/g = 3.17 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>104(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 3:41:18 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_16QAM\_RB\_75\_Offset\_0  
\_amb\_temp\_22.7\_liq\_temp\_21.6C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.389 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 10.282 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.7160


**SAR(1 g) = 0.996 mW/g; SAR(10 g) = 0.593 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.189 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>105(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

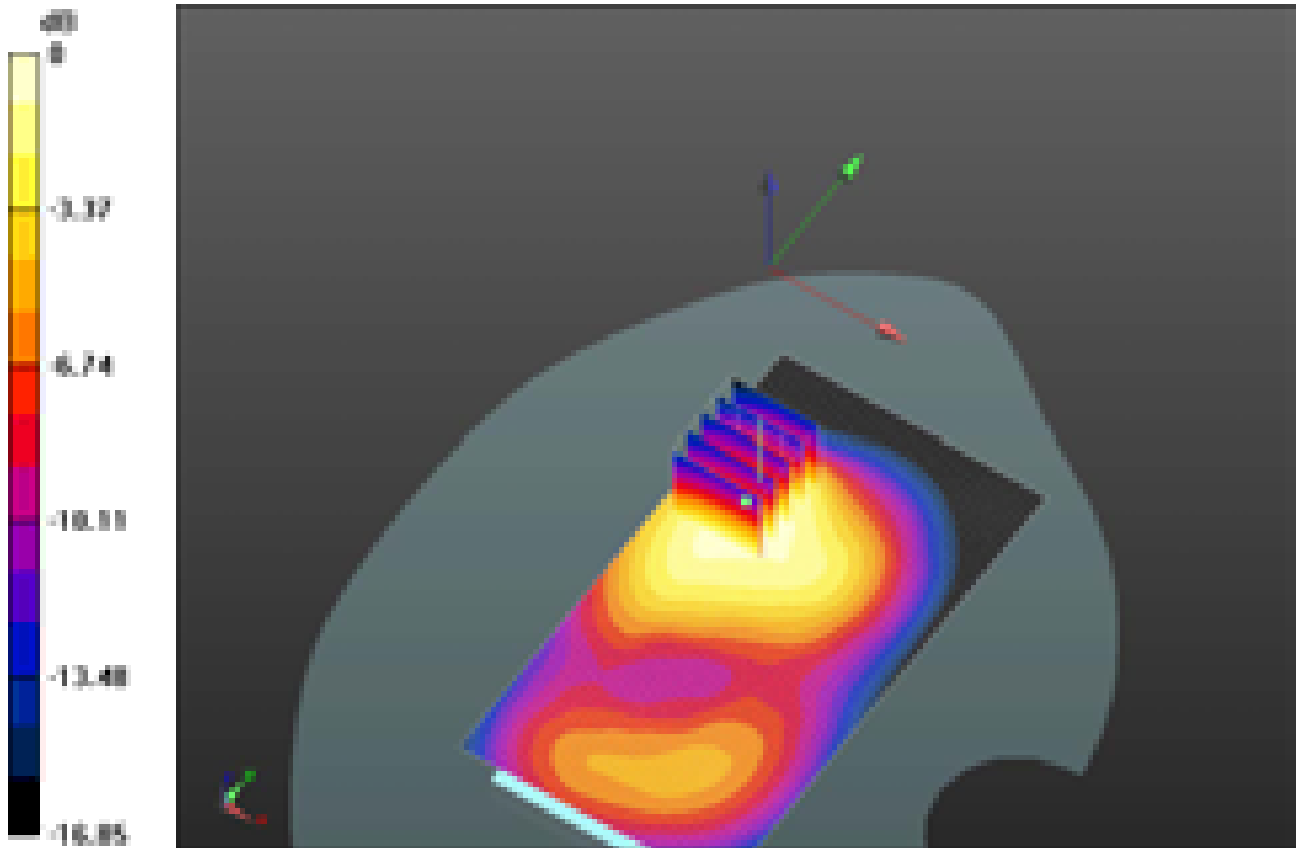

0 dB = 1.190mW/g = 1.51 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>106(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/14/2012 4:02:10 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_23.1\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.312 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.073 V/m; Power Drift = -0.21 dB


Peak SAR (extrapolated) = 1.6120

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.652 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.203 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>107(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

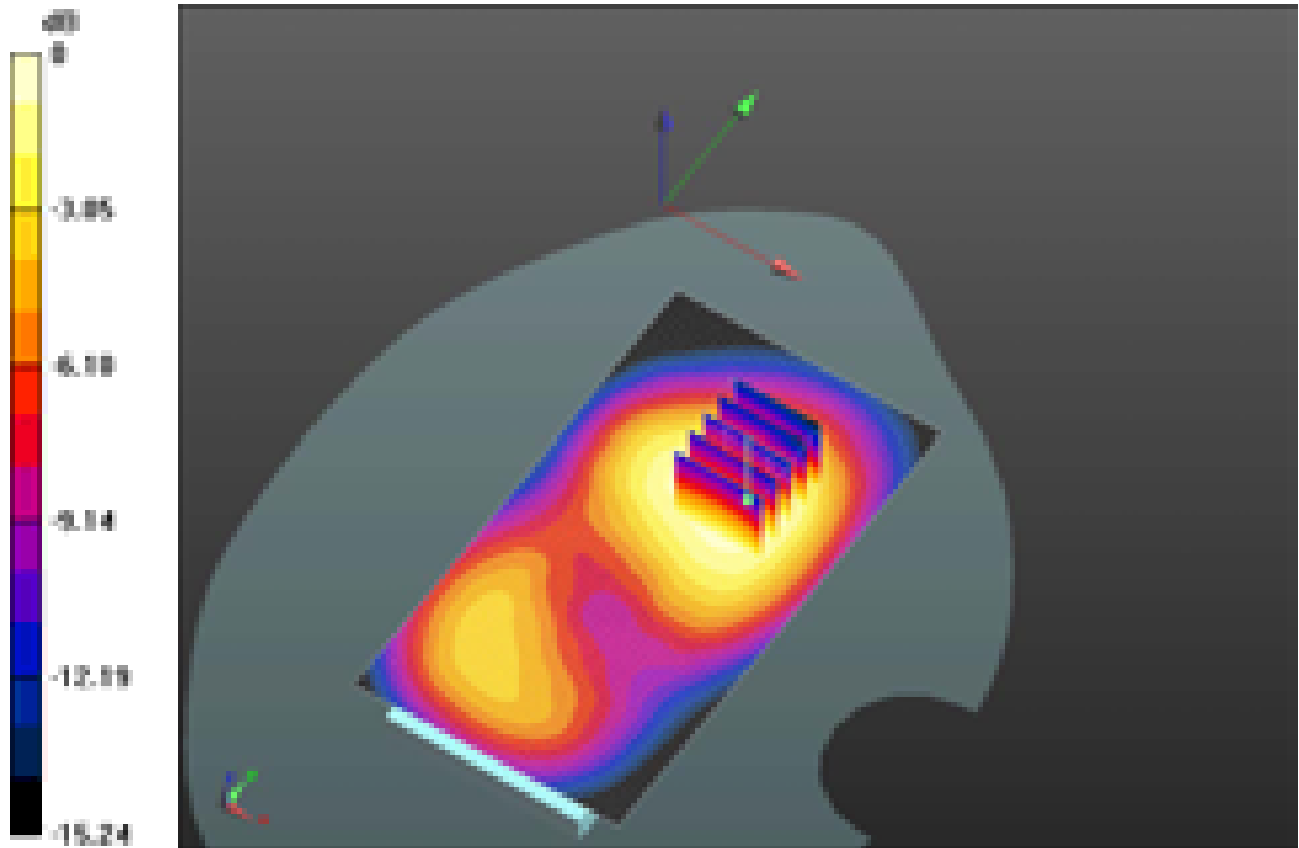

0 dB = 1.200mW/g = 1.58 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>108(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/14/2012 4:59:46 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_0  
\_amb\_temp\_22.6C\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.659 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.275 V/m; Power Drift = 0.22 dB


Peak SAR (extrapolated) = 0.8710

**SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.303 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.643 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>109(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

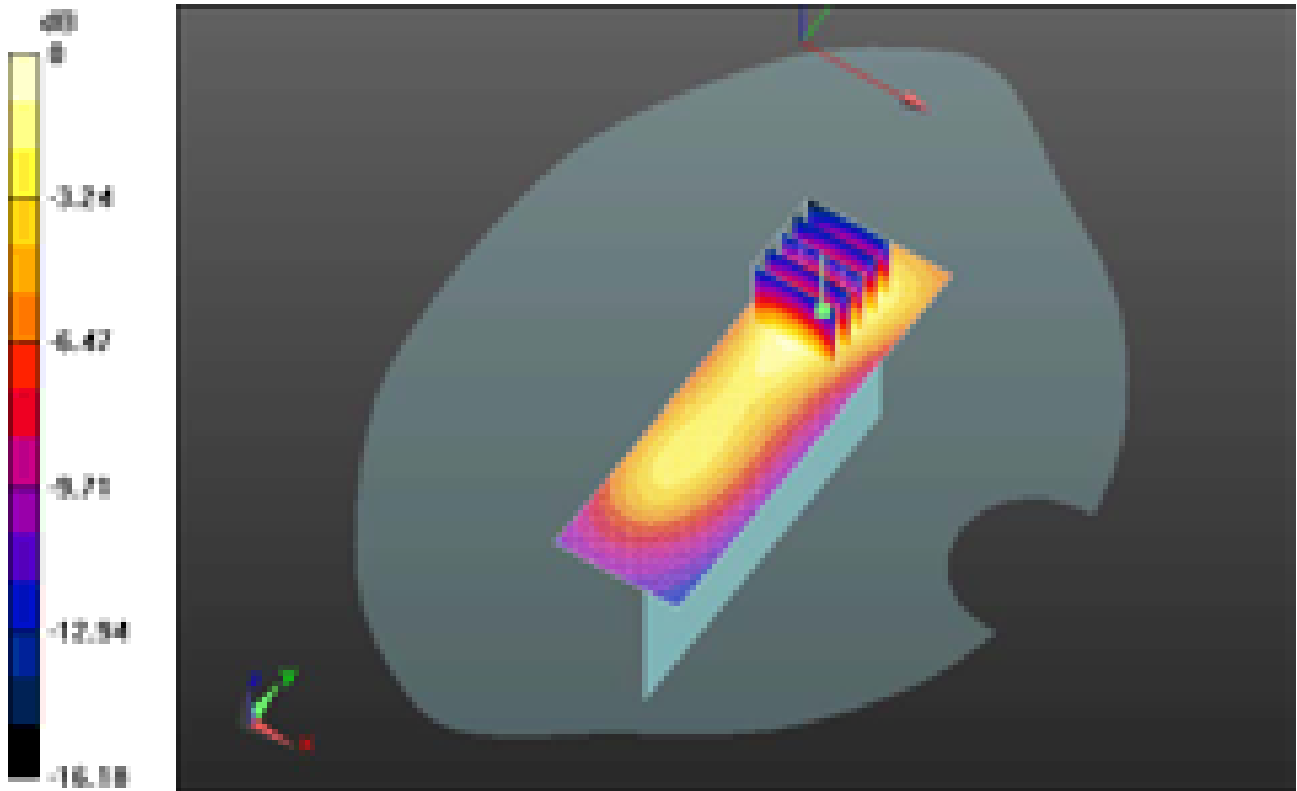

0 dB = 0.640mW/g = -3.88 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>110(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 4:42:09 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_LTE\_4\_mid\_chan\_amb\_temp\_22.9C\_liq\_tem  
 mp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.348 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.933 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.4470

**SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.164 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.337 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>111(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

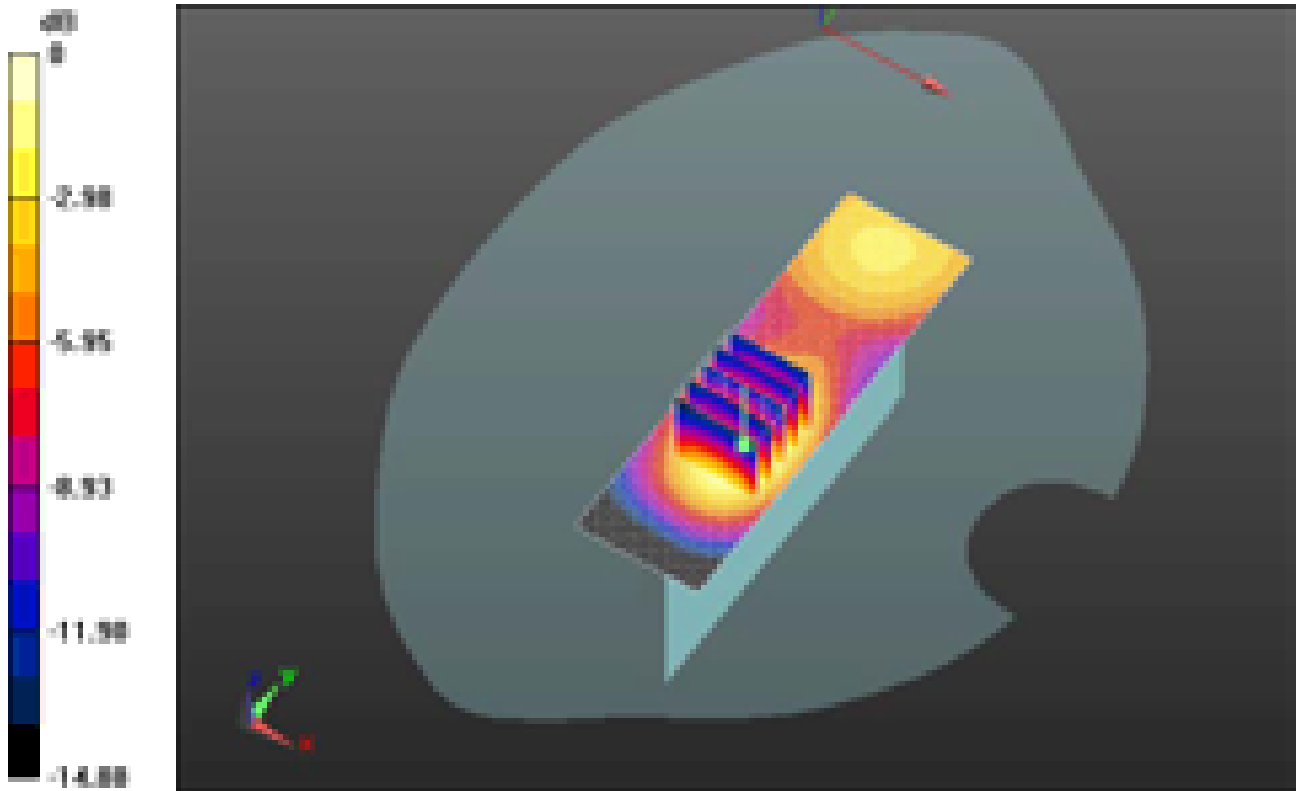

0 dB = 0.340mW/g = -9.37 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>112(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 5:20:56 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_22.6\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x81x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.688 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 20.827 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.9220


**SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.324 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.684 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>113(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

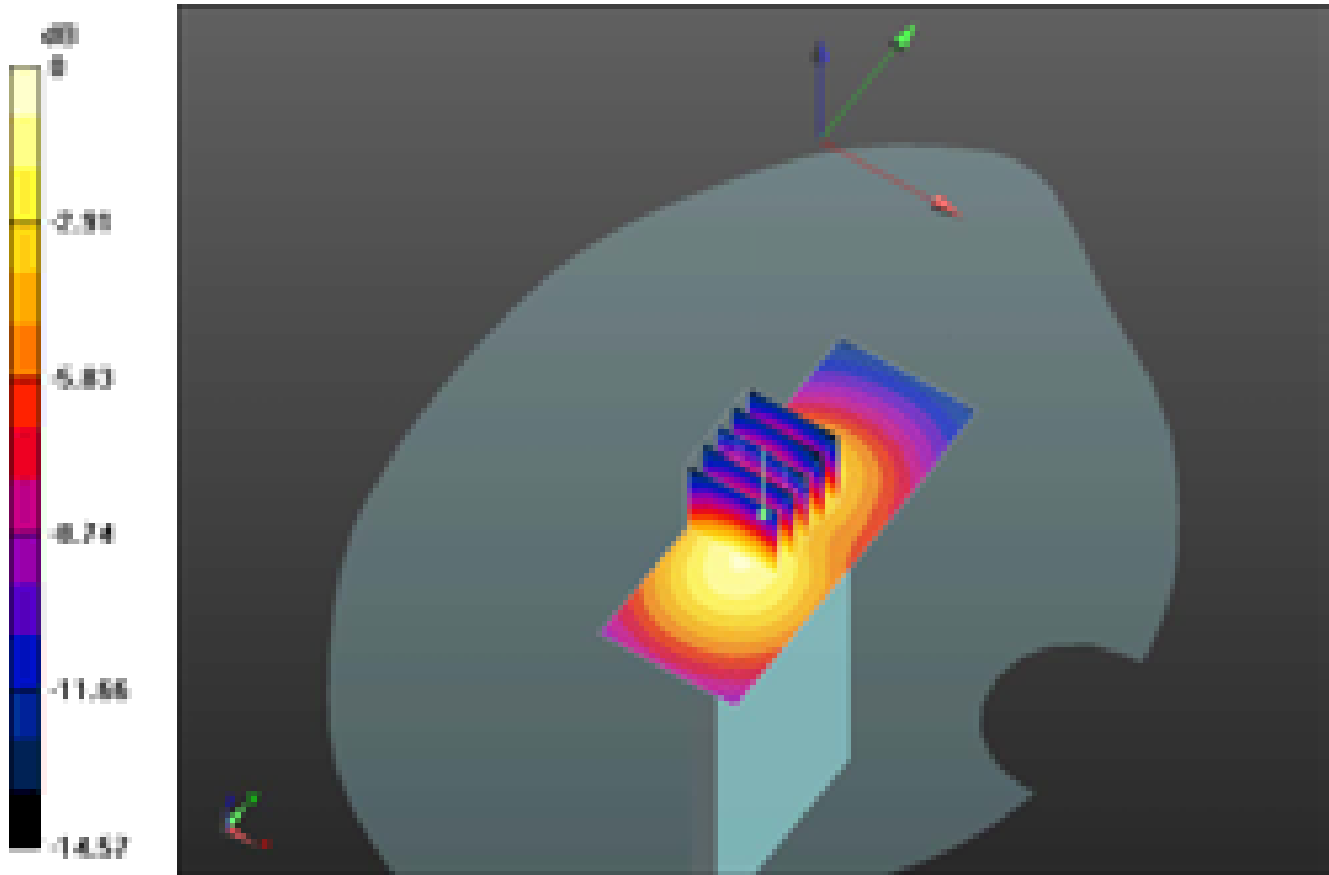

0 dB = 0.680mW/g = -3.35 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>114(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 9:50:09 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_low\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_22.5\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1720 MHz

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.495$  mho/m;  $\epsilon_r = 51.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.822 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.502 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.3750


**SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.874 mW/g**

Maximum value of SAR (measured) = 1.727 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>115(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

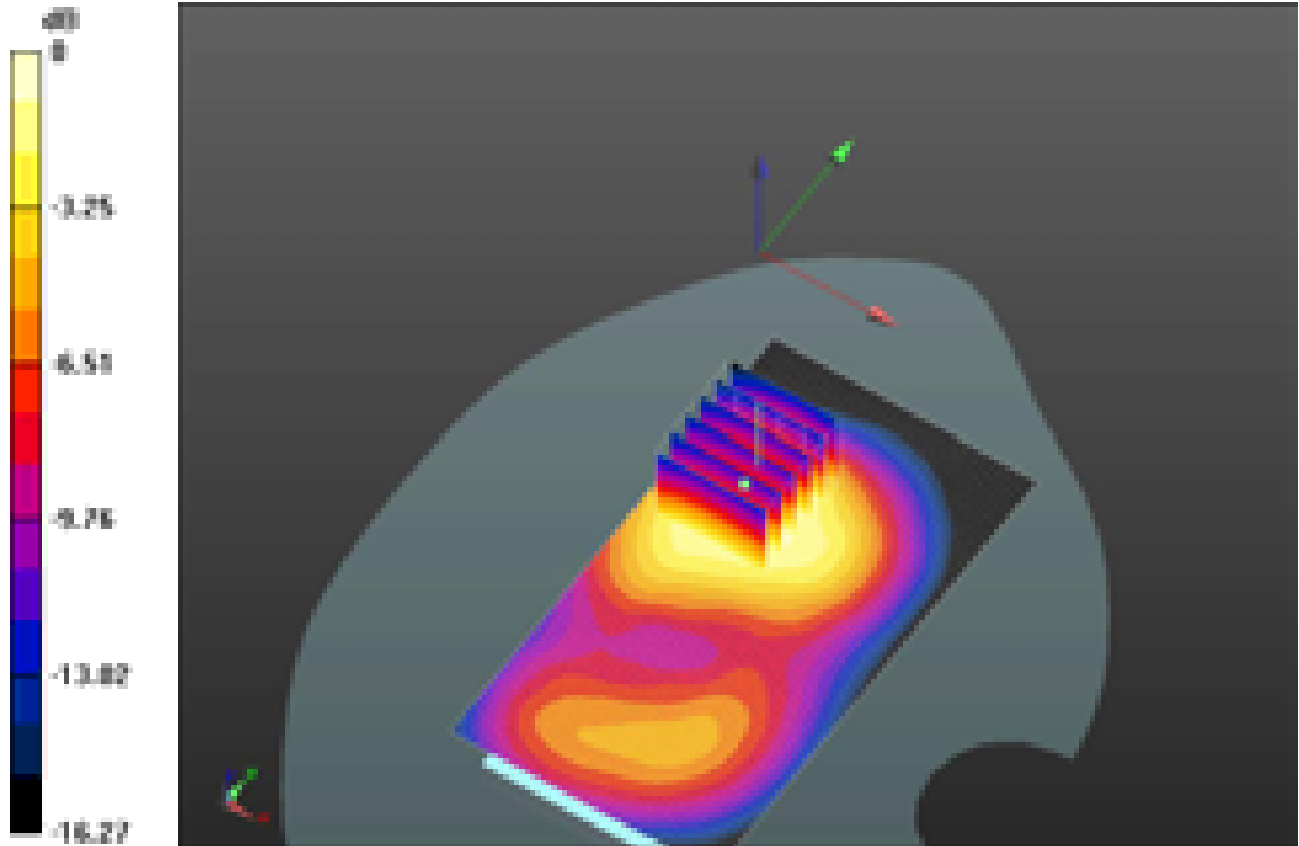

0 dB = 1.730mW/g = 4.76 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>116(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 10:10:59 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_high\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_22.7\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1745 MHz

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.732 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 11.875 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.3640


**SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.822 mW/g**

Maximum value of SAR (measured) = 1.711 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>117(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

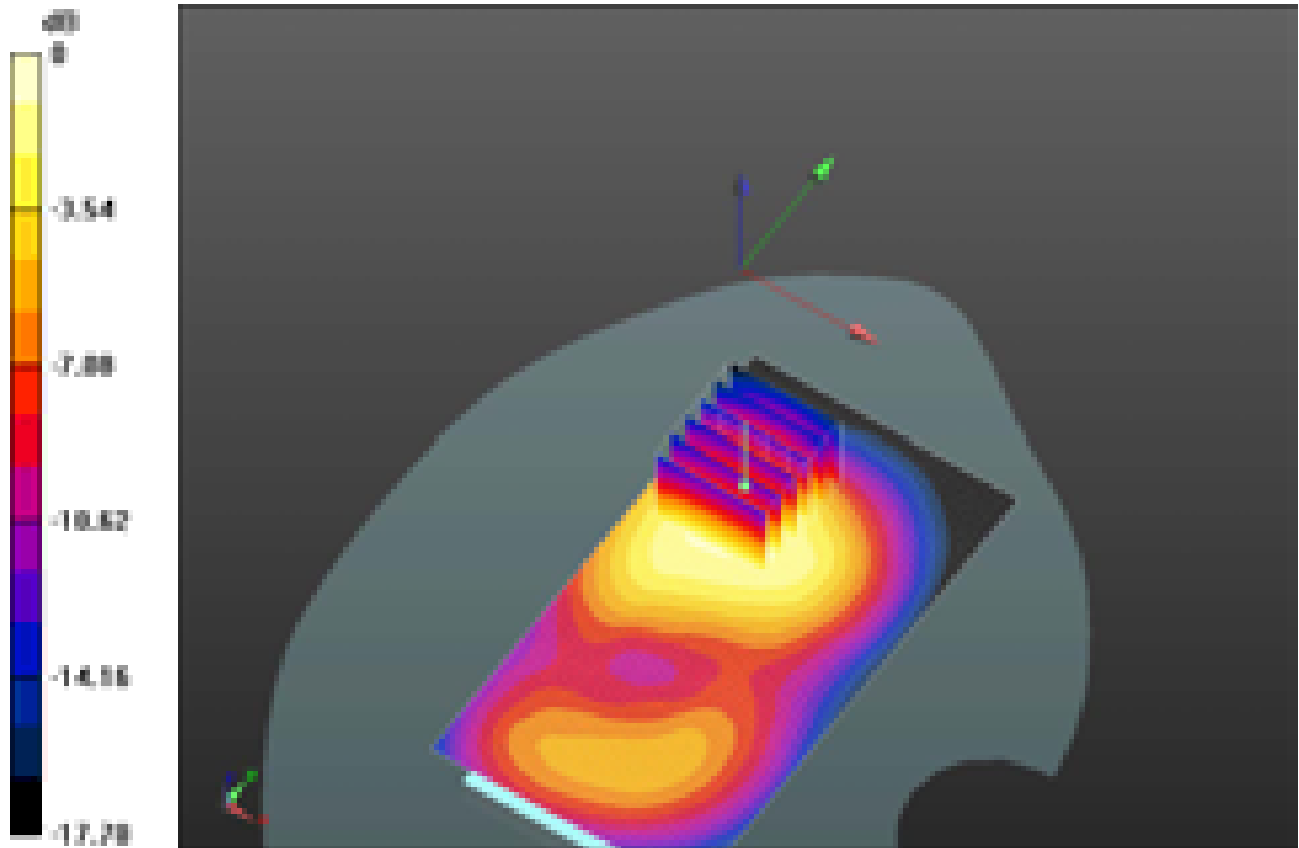

0 dB = 1.710mW/g = 4.66 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>118(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/14/2012 11:00:18 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_HS\_Back\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_23.0\_liq\_temp\_21.6C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 51.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.832 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.387 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.3380

**SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.861 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.728 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>119(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

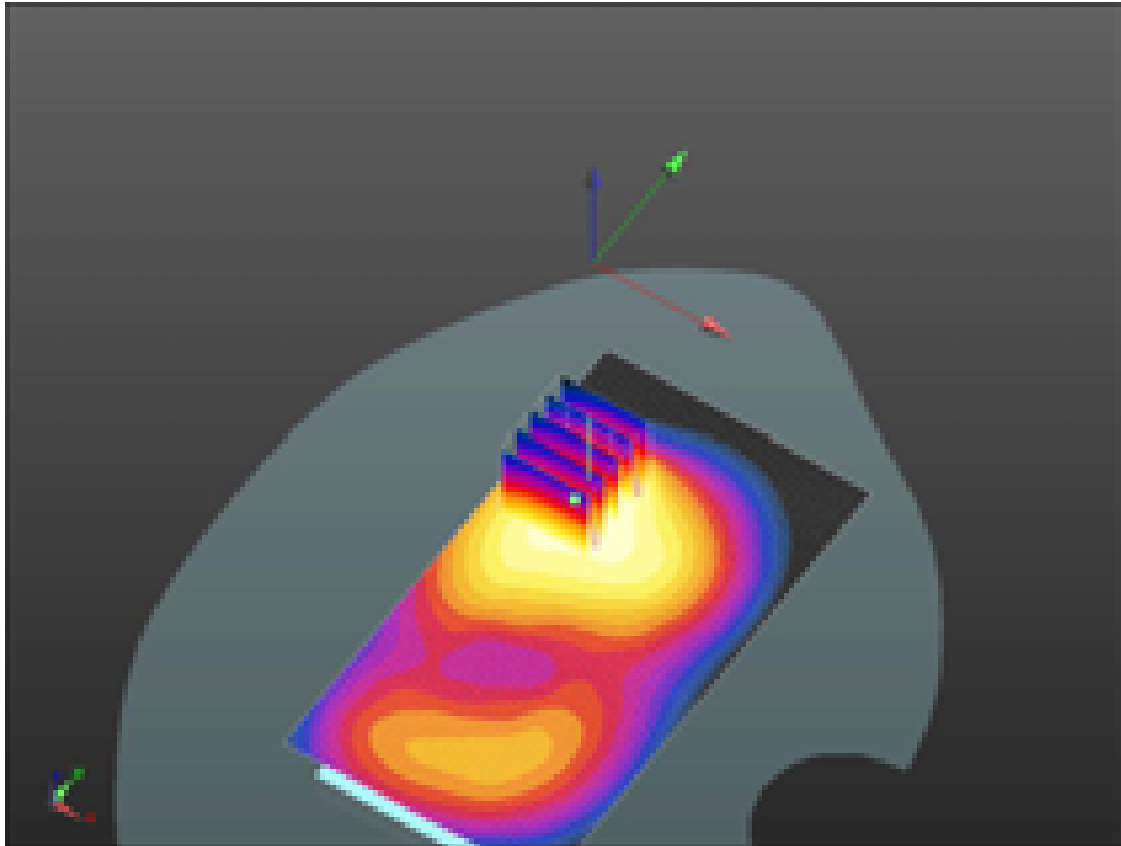

0 dB = 1.730mW/g = 4.76 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>120(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/18/2012 5:31:52 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_BW\_15\_RB\_1\_Off  
set\_0\_amb\_temp\_23.2\_liq\_temp\_21.9C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.484$  mho/m;  $\epsilon_r = 50.989$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.989 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 13.595 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.5190


**SAR(1 g) = 1.48 mW/g; SAR(10 g) = 0.892 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.723 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>121(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

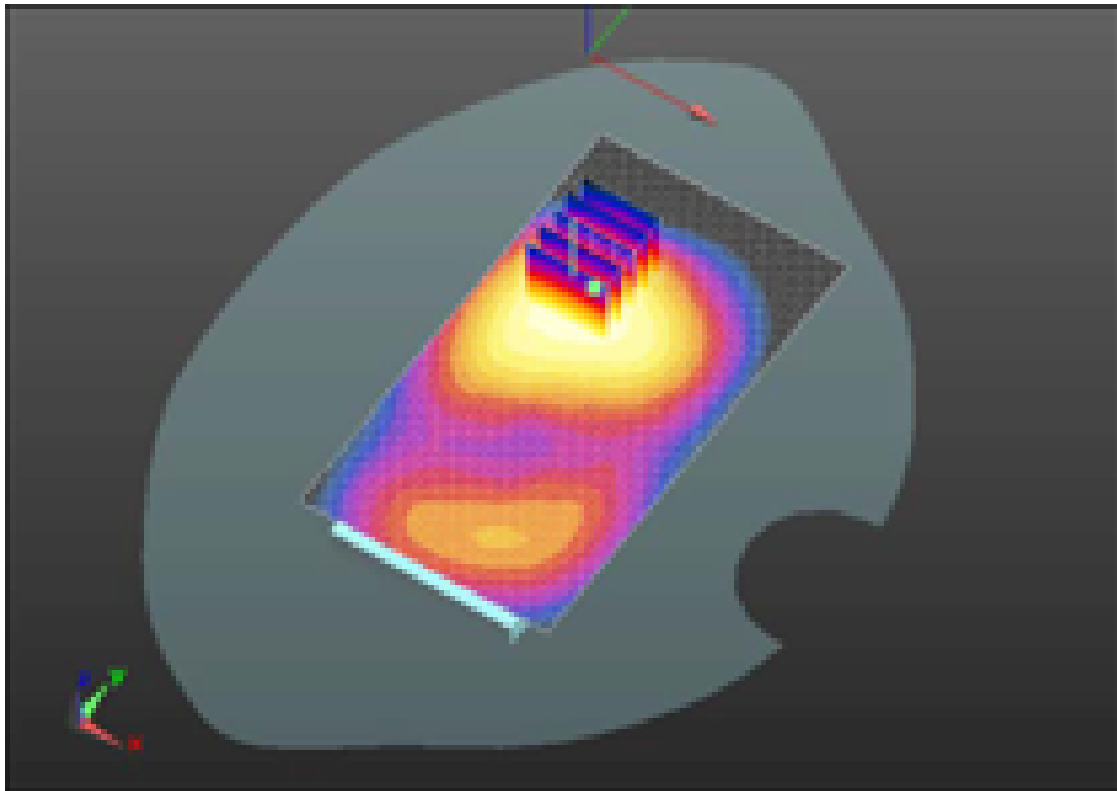

0 dB = 1.720mW/g = 4.71 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>122(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/18/2012 6:49:28 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_BW\_10\_RB\_1\_Off  
set\_0\_amb\_temp\_23.2\_liq\_temp\_21.9C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.484$  mho/m;  $\epsilon_r = 50.989$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.241 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.032 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.4780

**SAR(1 g) = 1.49 mW/g; SAR(10 g) = 0.894 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.777 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>123(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

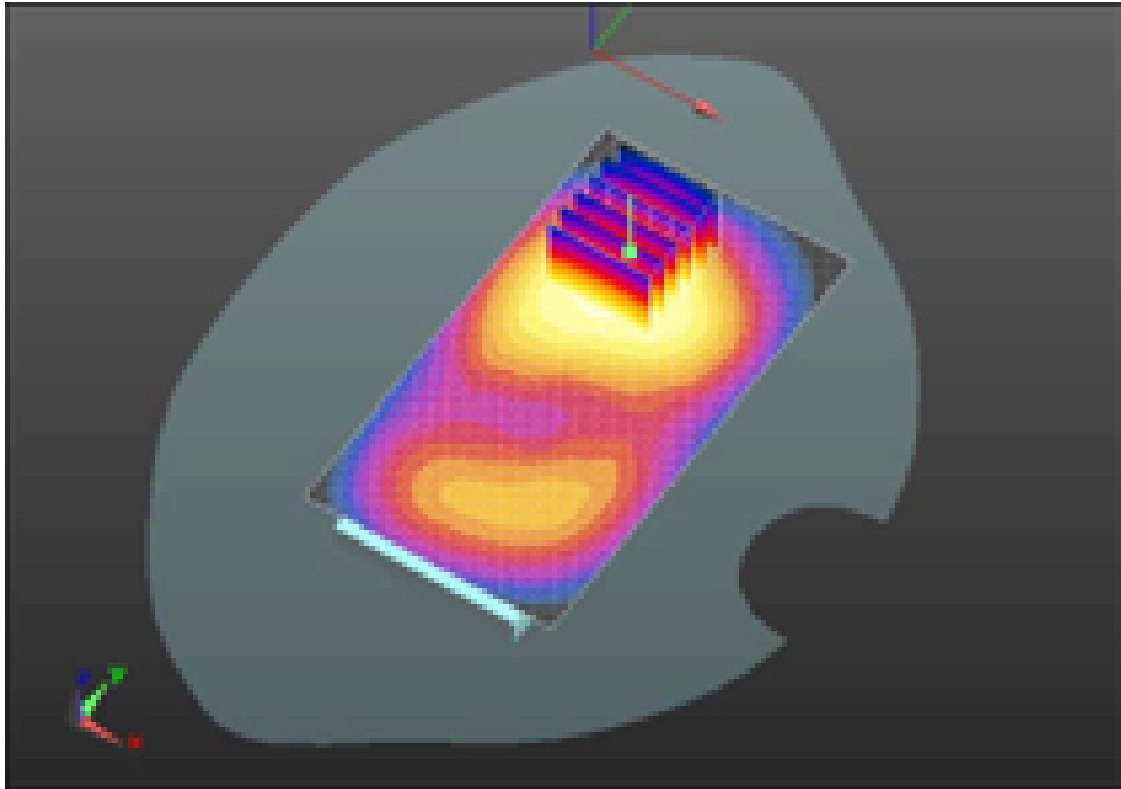

0 dB = 1.780mW/g = 5.01 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>124(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/18/2012 7:53:34 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_BW\_5\_RB\_1\_Offs  
et\_0\_amb\_temp\_22.9\_liq\_temp\_21.9C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.484$  mho/m;  $\epsilon_r = 50.989$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.198 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.772 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.5130

**SAR(1 g) = 1.49 mW/g; SAR(10 g) = 0.895 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.797 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>125(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

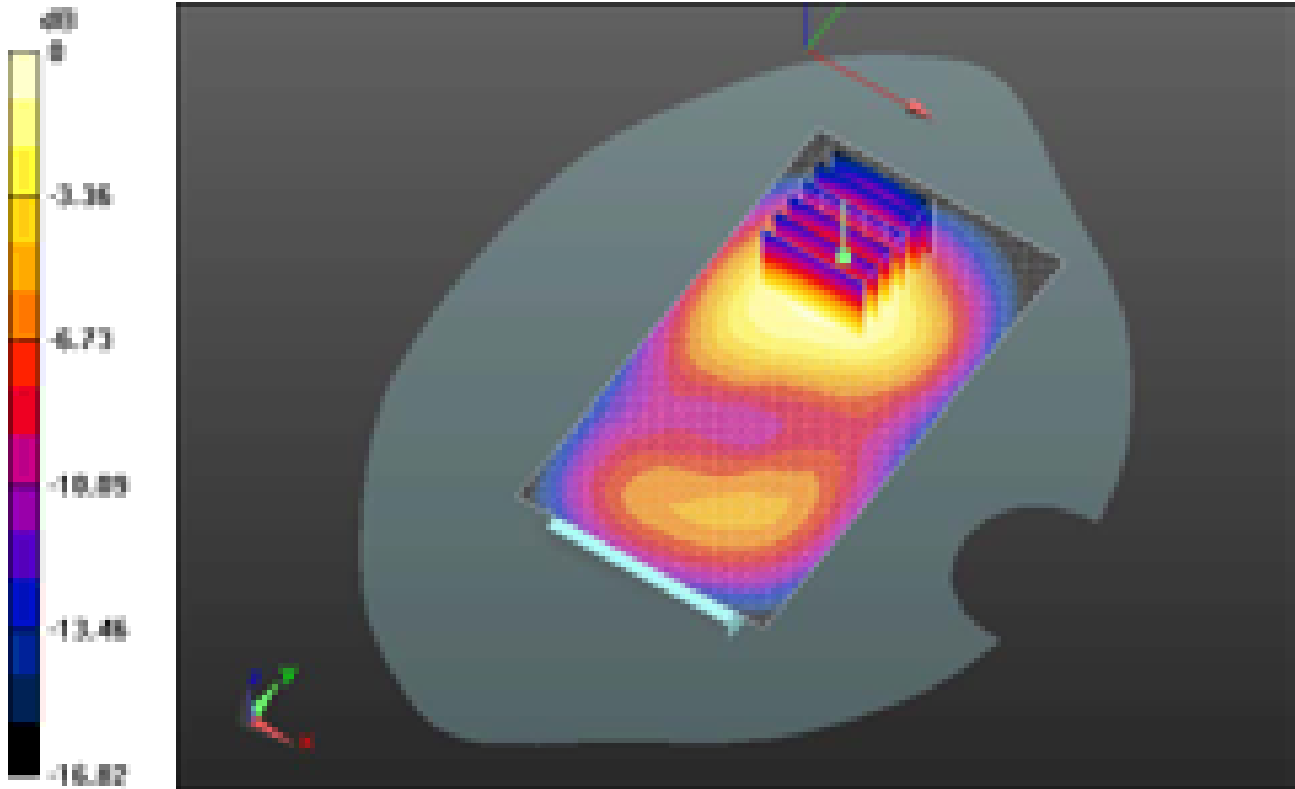

0 dB = 1.800mW/g = 5.11 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>126(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/18/2012 8:13:23 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_BW\_3\_RB\_1\_Offs  
 et\_0\_amb\_temp\_22.7\_liq\_temp\_21.9C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.484$  mho/m;  $\epsilon_r = 50.989$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.228 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 11.731 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.5150

**SAR(1 g) = 1.5 mW/g; SAR(10 g) = 0.899 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.801 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>127(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

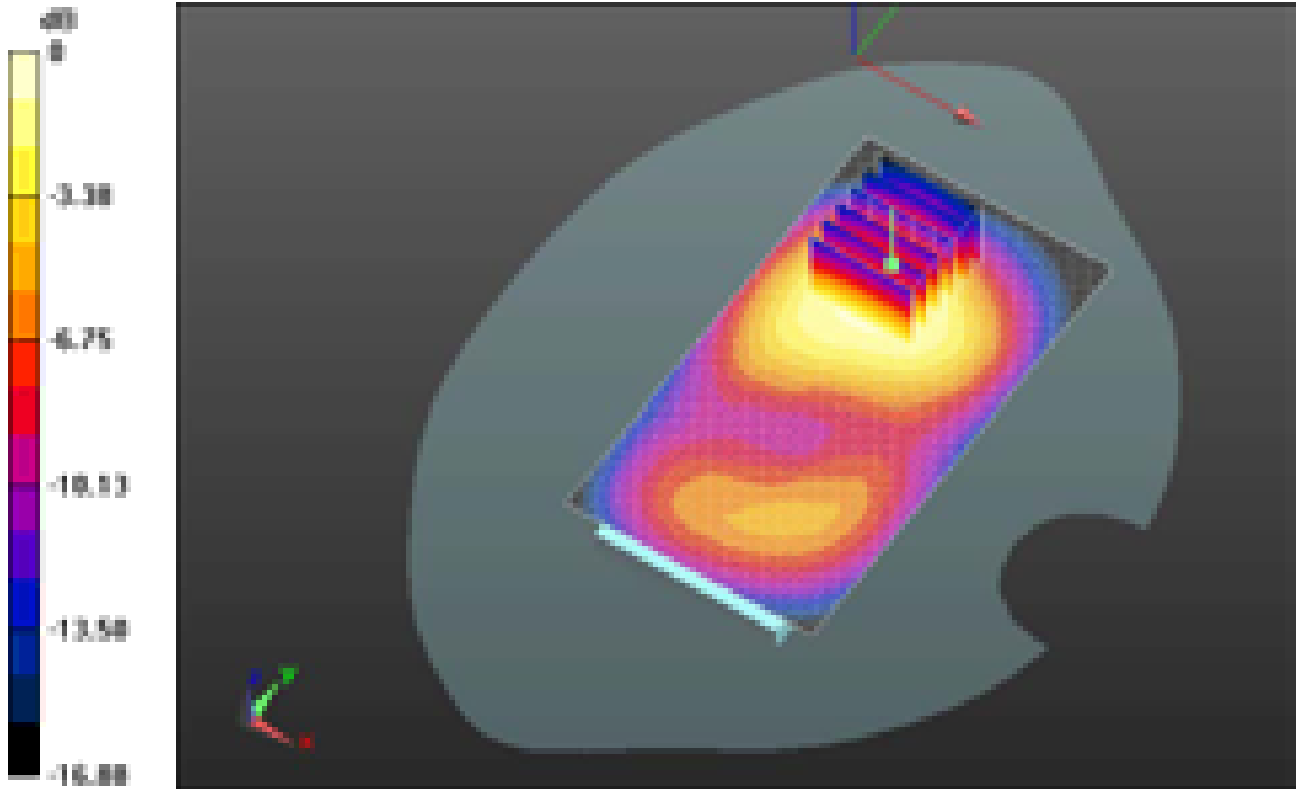

0 dB = 1.800mW/g = 5.11 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>128(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/18/2012 8:36:09 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_BW\_1.4\_RB\_1\_Of  
fset\_0\_amb\_temp\_22.7\_liq\_temp\_21.9C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.484$  mho/m;  $\epsilon_r = 50.989$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.239 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 11.651 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.5200


**SAR(1 g) = 1.5 mW/g; SAR(10 g) = 0.902 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.801 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>129(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

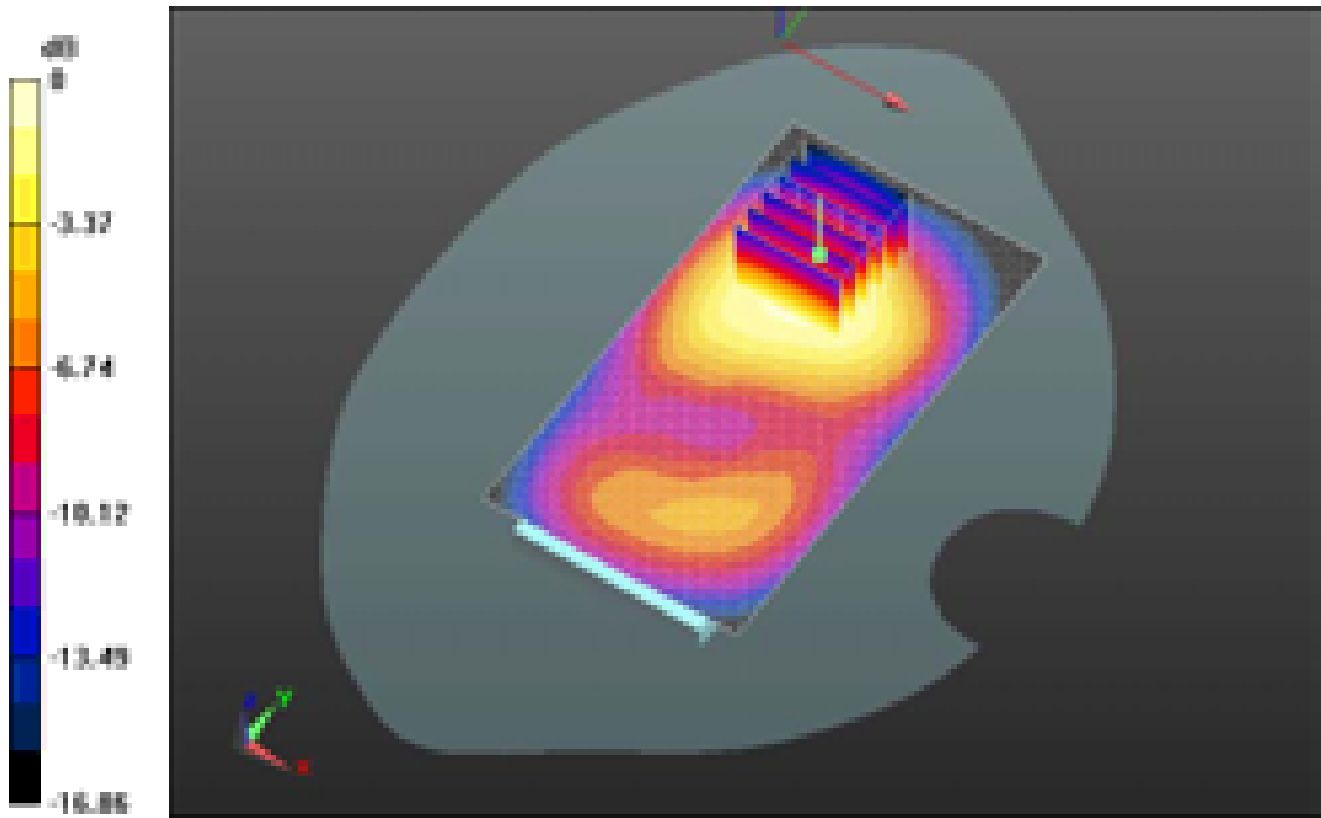

0 dB = 1.800mW/g = 5.11 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>130(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/18/2012 9:21:26 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_BW\_20\_RB\_100\_  
 Offset\_0\_amb\_temp\_22.6\_liq\_temp\_21.9C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.484$  mho/m;  $\epsilon_r = 50.989$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.684 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 11.984 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.2910

**SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.764 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.561 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>131(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

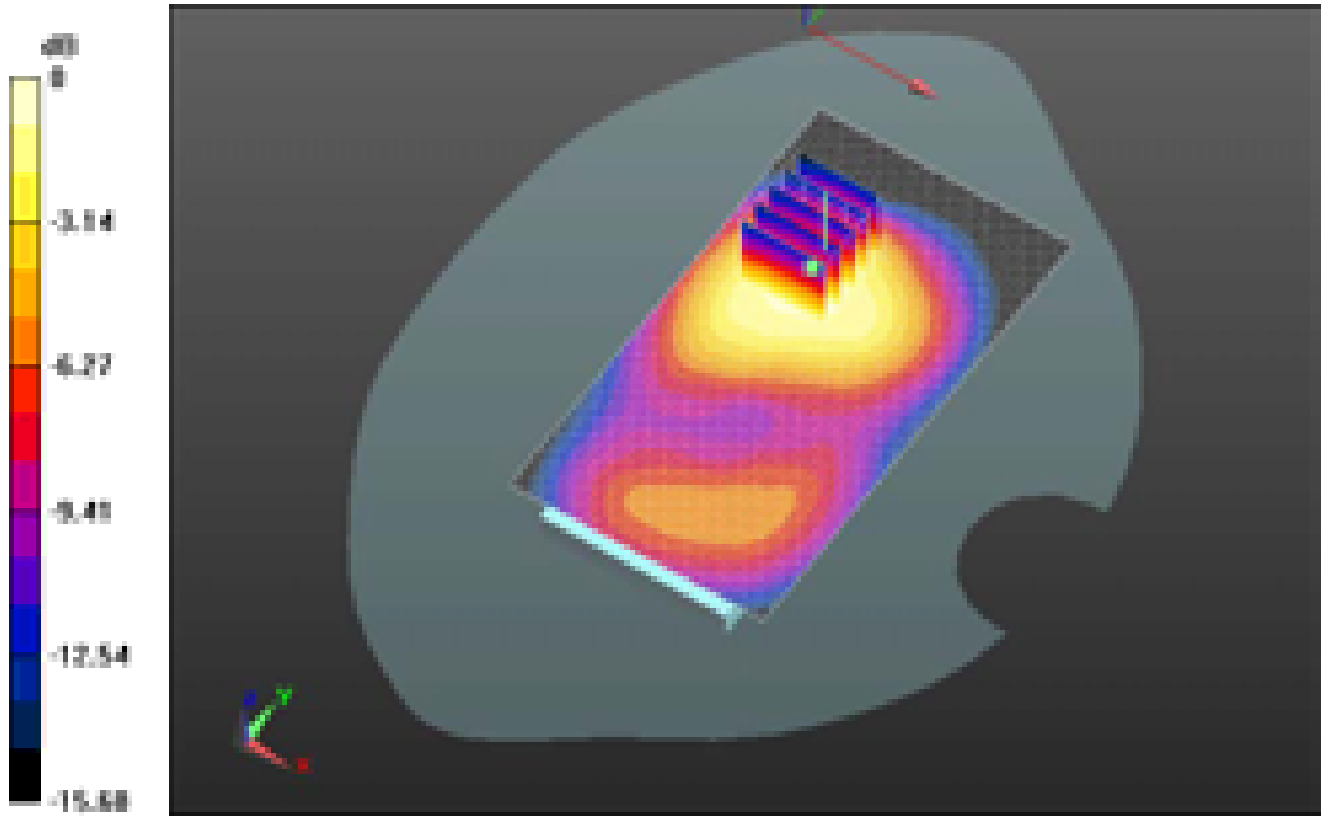

0 dB = 1.560mW/g = 3.86 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>132(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/25/2012 9:02:13 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_23.2\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.310 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.970 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.7540

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.630 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.216 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>133(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

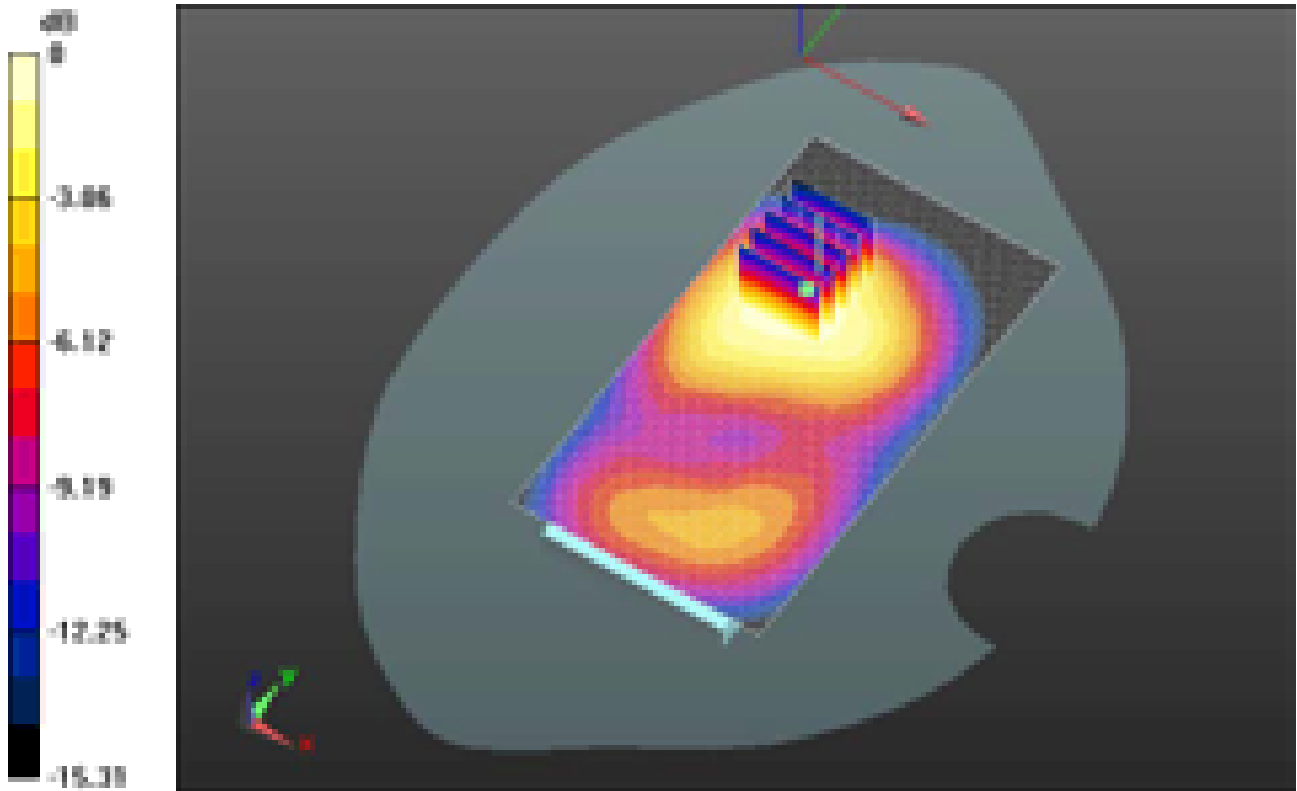

0 dB = 1.220mW/g = 1.73 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>134(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/25/2012 9:20:28 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_RB\_1\_Offset\_99\_amb\_temp\_23.2\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.243 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.678 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.7030

**SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.580 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.171 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>135(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

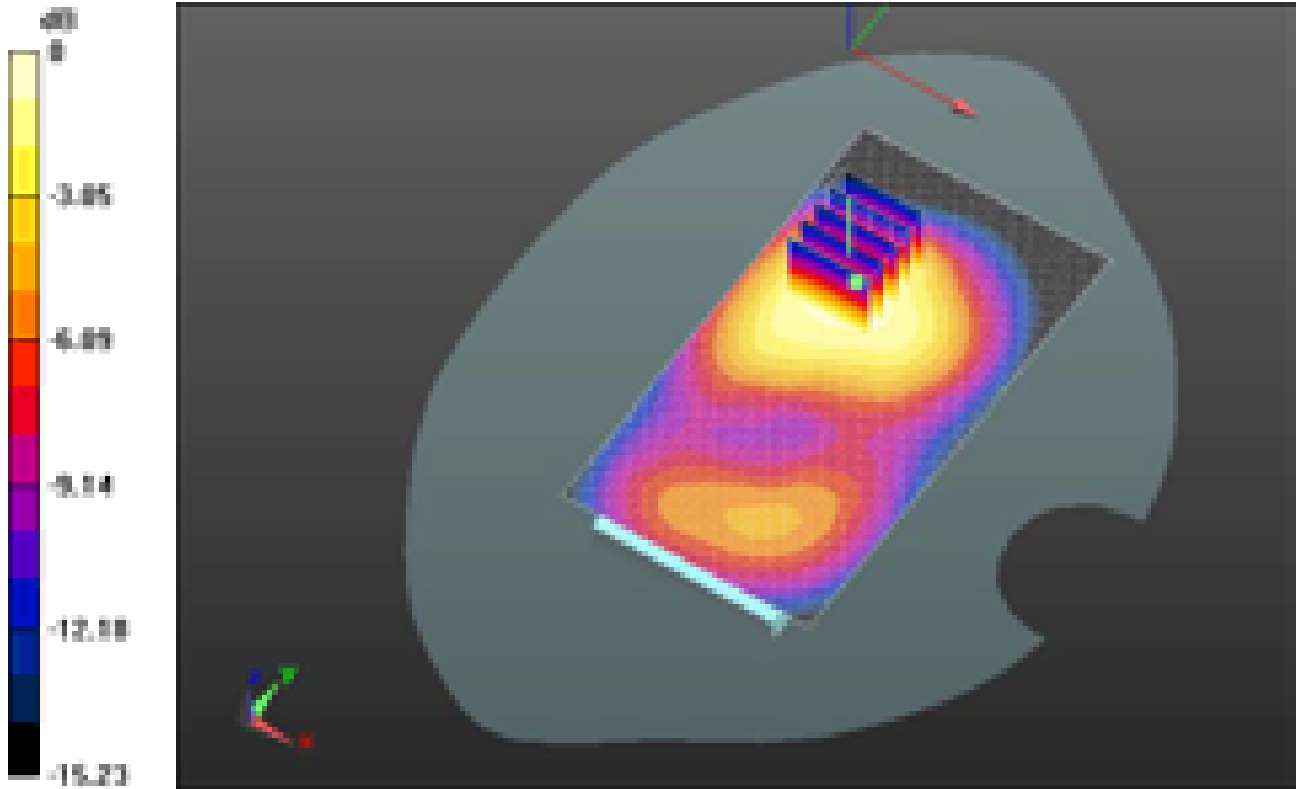

0 dB = 1.170mW/g = 1.36 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>136(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/25/2012 9:40:50 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_QPSK\_RB\_50\_Offset\_0\_amb\_temp\_23.2\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.315 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 11.023 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.7900


**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.632 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.232 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>137(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

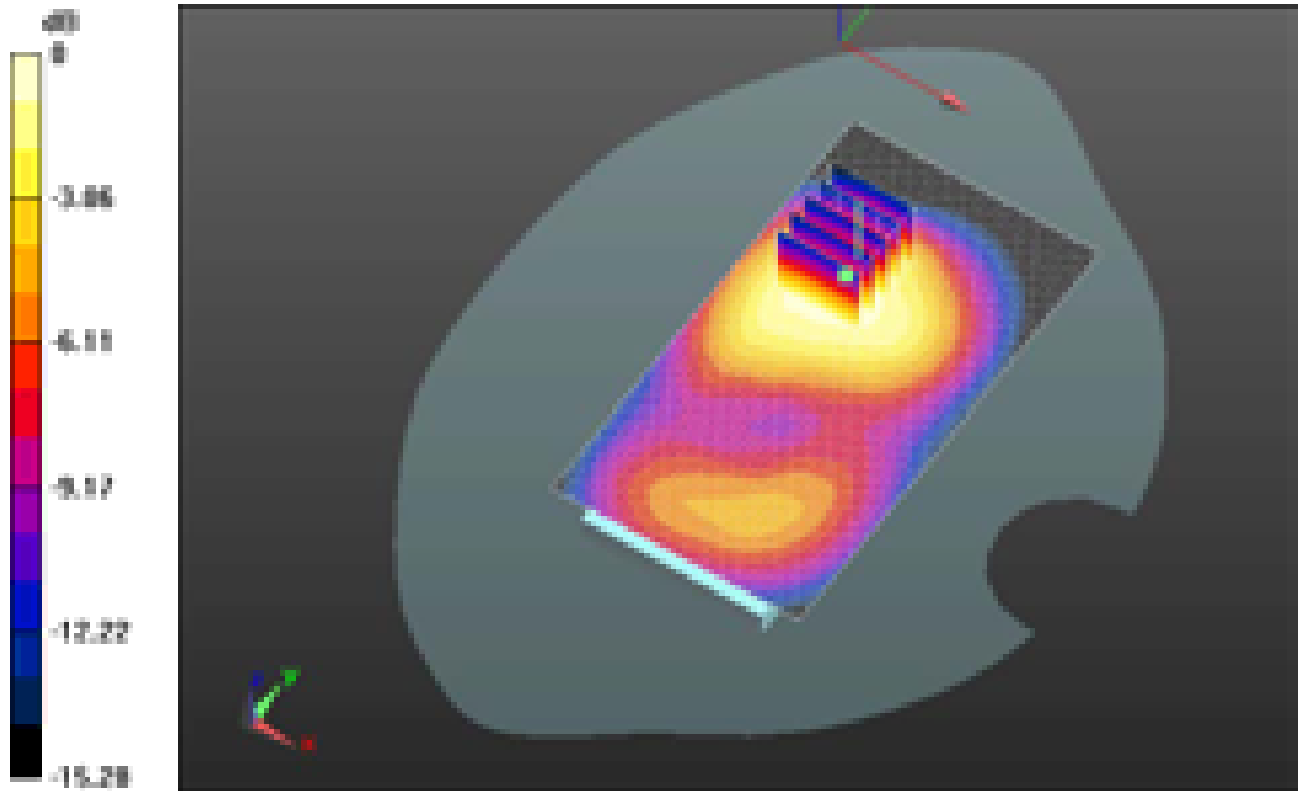

0 dB = 1.230mW/g = 1.80 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>138(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/25/2012 10:41:38 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset\_0\_amb\_temp\_22.9\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.347 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 10.849 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.8490

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.651 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.300 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>139(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

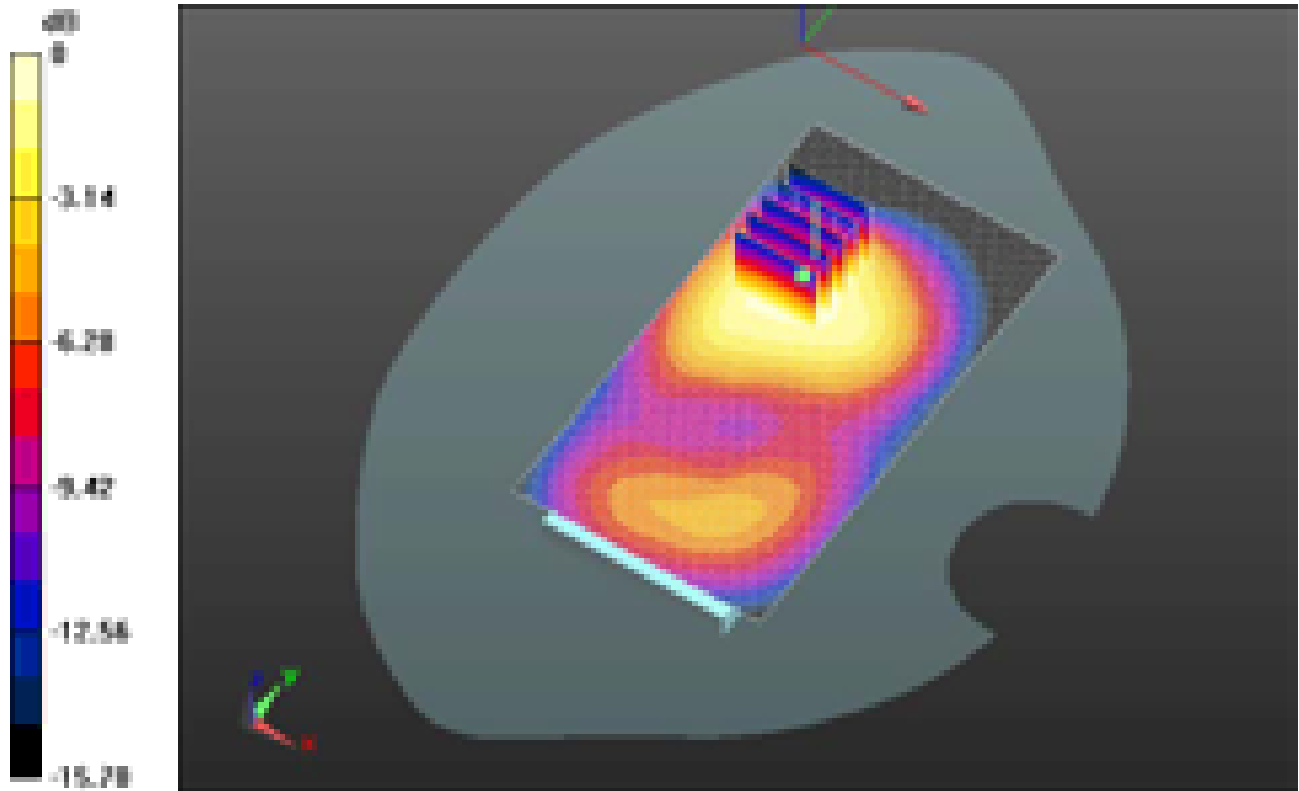

0 dB = 1.300mW/g = 2.28 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>140(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/25/2012 11:12:58 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset\_99  
\_amb\_temp\_22.9\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 1732.5 MHz  
Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.277 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 10.714 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.7820

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.630 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.248 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>141(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

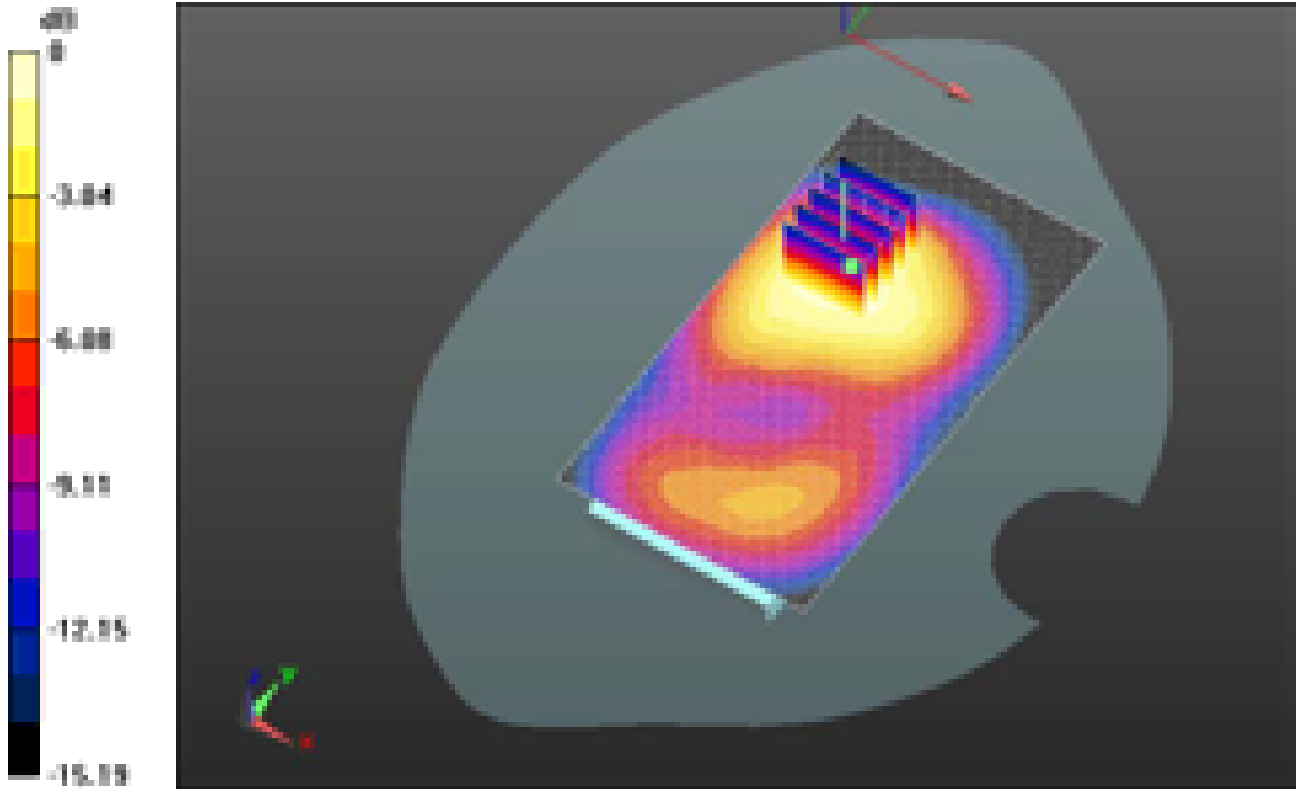

0 dB = 1.250mW/g = 1.94 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>142(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/25/2012 10:19:09 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_mid\_chan\_16QAM\_RB\_75\_Offset\_0  
\_amb\_temp\_23.2\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 1732.5 MHz  
Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.283 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 10.901 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 1.8160  
**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.622 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.240 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>143(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

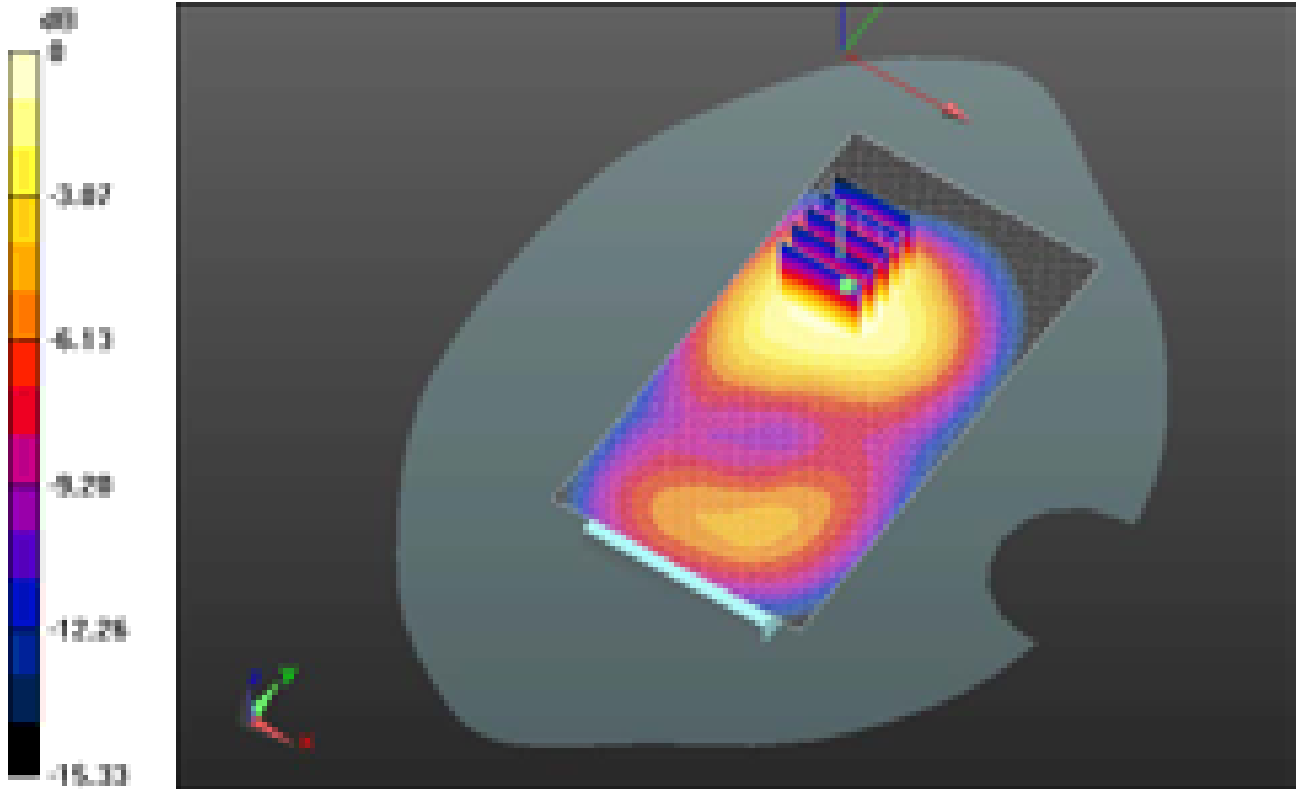

0 dB = 1.240mW/g = 1.87 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>144(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 1:43:14 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_low\_chan\_16QAM\_RB\_1\_Offset\_0\_amb\_temp\_22.9\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE 1800\_Band 4; Frequency: 1720 MHz

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.494$  mho/m;  $\epsilon_r = 51.296$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.332 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 10.930 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.8060

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.638 mW/g**


Maximum value of SAR (measured) = 1.229 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>145(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

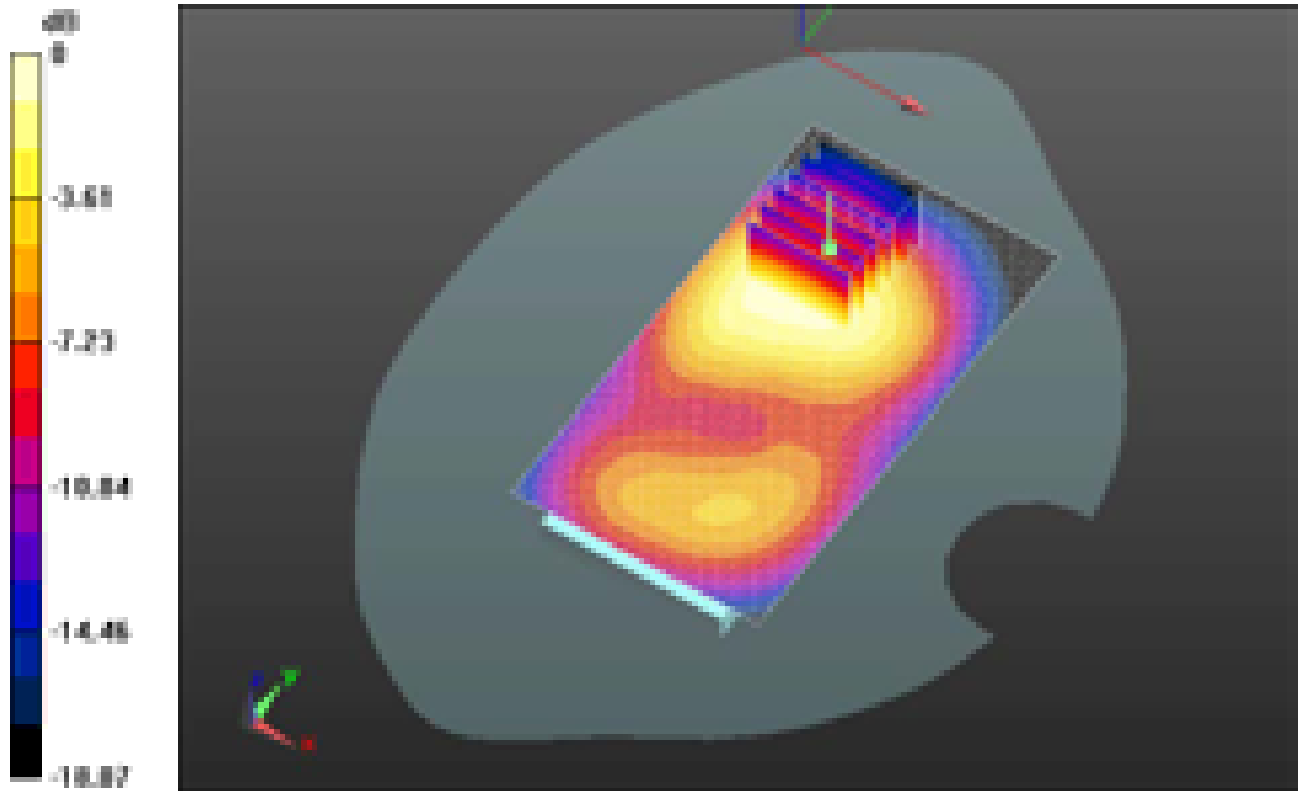

0 dB = 1.230mW/g = 1.80 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>146(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 2:05:51 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_4\_high\_chan\_16QAM\_RB\_1\_Offset\_0\_amb\_temp\_22.8\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE 1800\_Band 4; Frequency: 1749 MHz

Medium parameters used (interpolated):  $f = 1749$  MHz;  $\sigma = 1.522$  mho/m;  $\epsilon_r = 51.297$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.232 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 10.047 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.5970

**SAR(1 g) = 0.944 mW/g; SAR(10 g) = 0.555 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.141 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>147(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

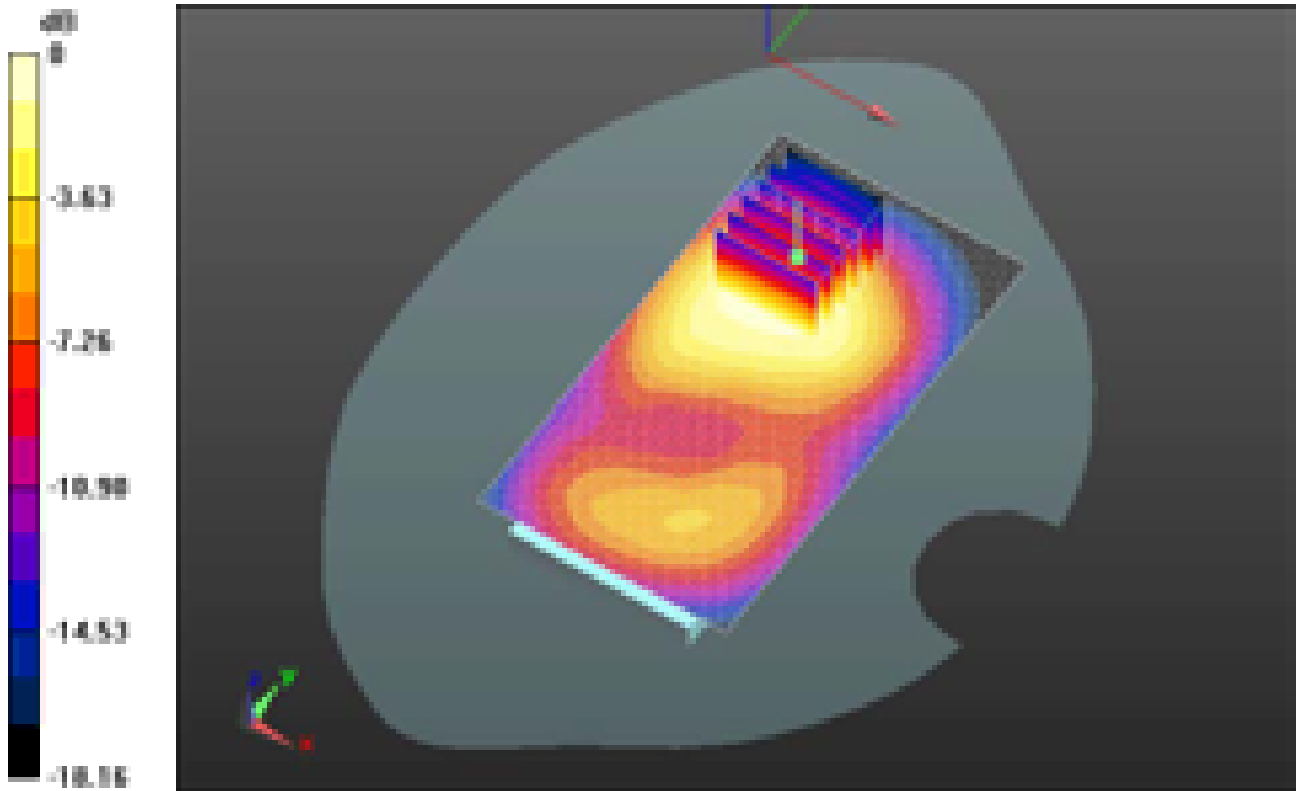

0 dB = 1.140mW/g = 1.14 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>148(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 11:43:25 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset\_0\_a  
mb\_temp\_22.9\_liq\_temp\_22.2C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE 1800\_Band 4; Frequency: 1732.5 MHz  
Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.574 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 14.525 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 0.7510  
**SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.258 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.546 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>149(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

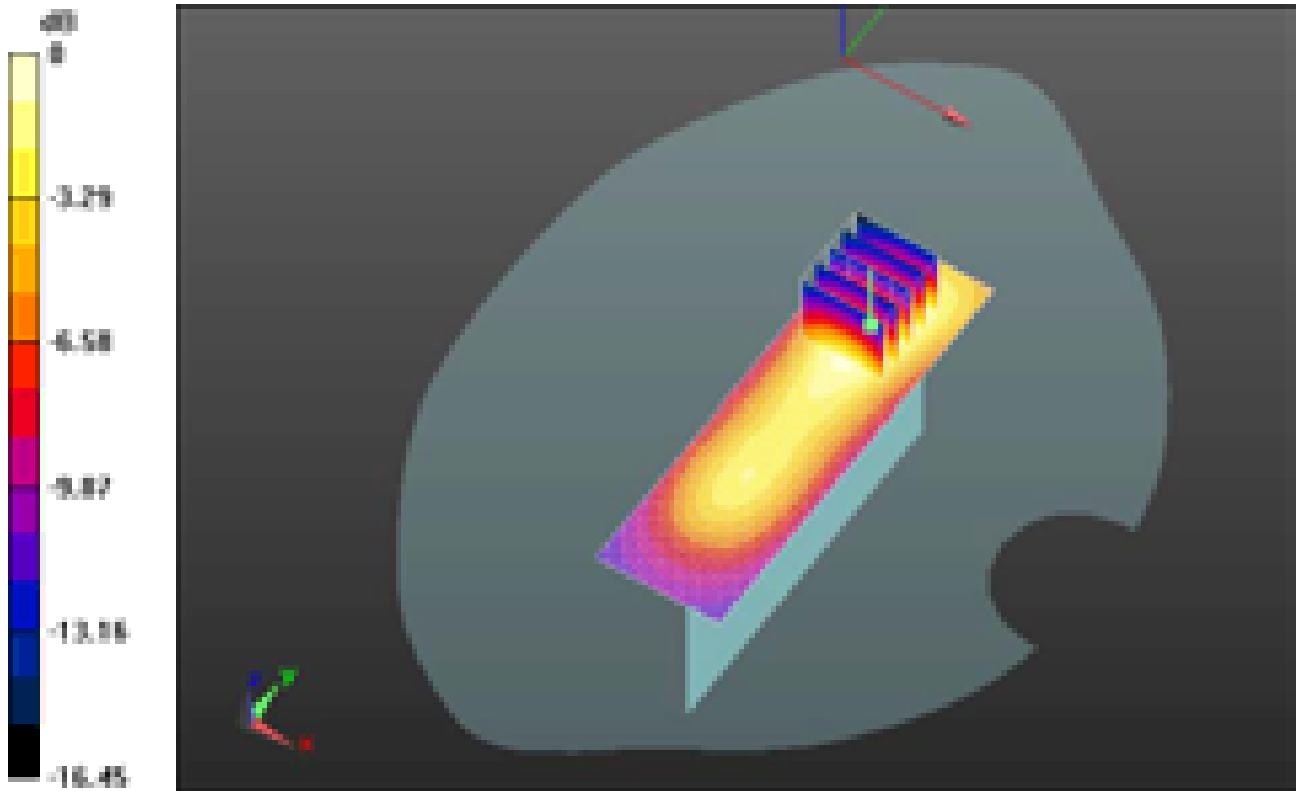

0 dB = 0.550mW/g = -5.19 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>150(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/26/2012 2:07:54 PM

Test Laboratory: RIM Testing Services

## MHS\_10mm\_Spacer\_Right\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset\_0

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE 1800\_Band 4; Frequency: 1732.5 MHz

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.273 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.525 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.3560

**SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.130 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.266 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>151(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

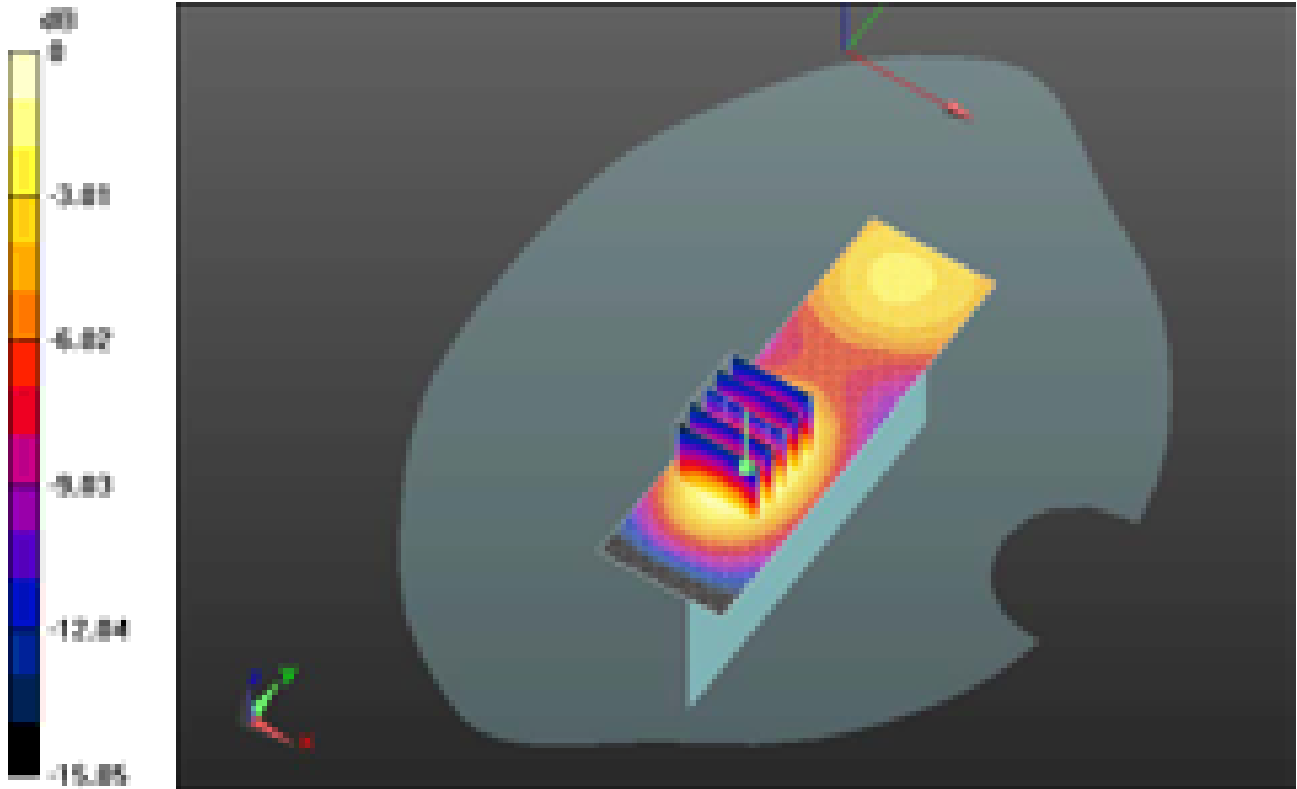

0 dB = 0.270mW/g = -11.37 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>152(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 11:11:41 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset\_0\_amb\_temp\_22.9\_liq\_temp\_22.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz  
 Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.596 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
 Reference Value = 19.646 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.8490  
**SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.283 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.621 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>153(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

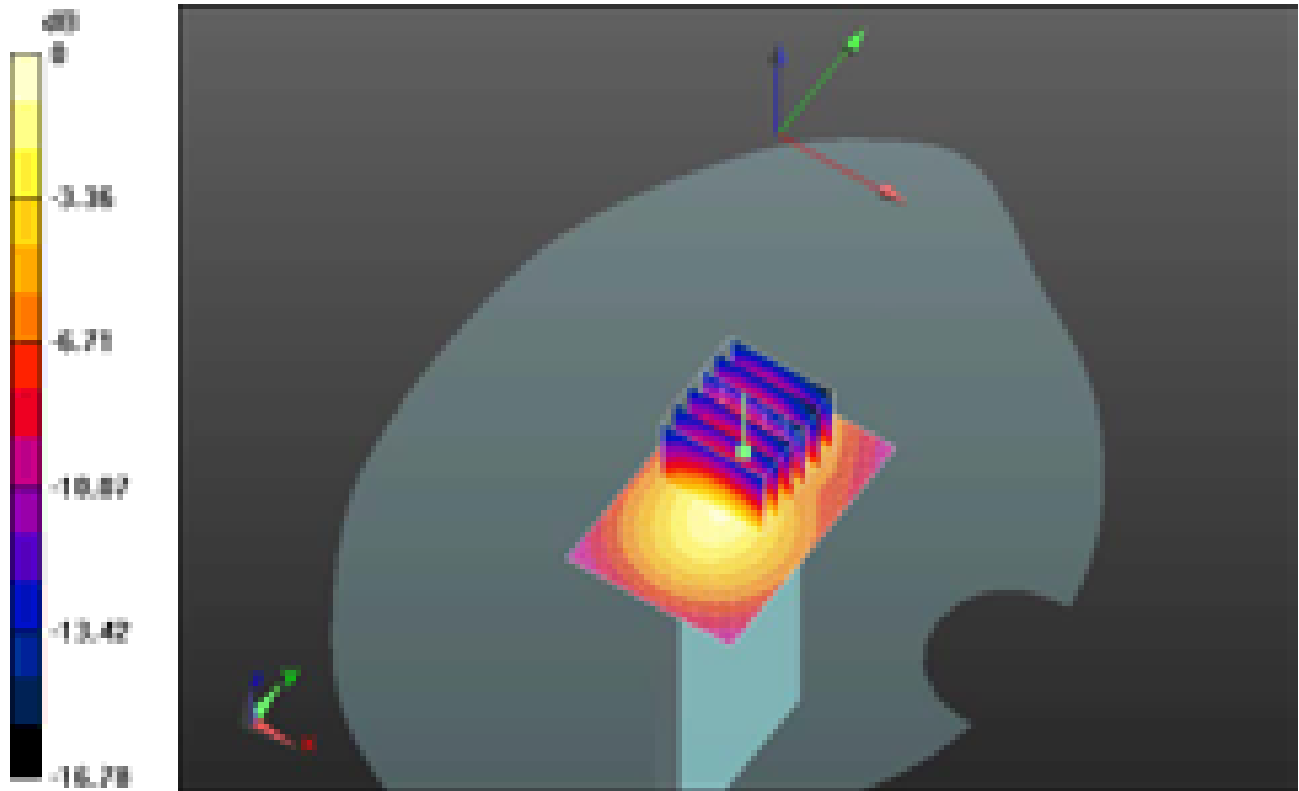

0 dB = 0.620mW/g = -4.15 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>154(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 2:33:41 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_HS\_Back\_LTE\_4\_mid\_chan\_16QAM\_RB\_1\_Offset  
\_0\_amb\_temp\_22.9\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE; Frequency: 1732.5 MHz  
Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.292$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.414 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 10.613 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 1.8830

**SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.662 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.322 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>155(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

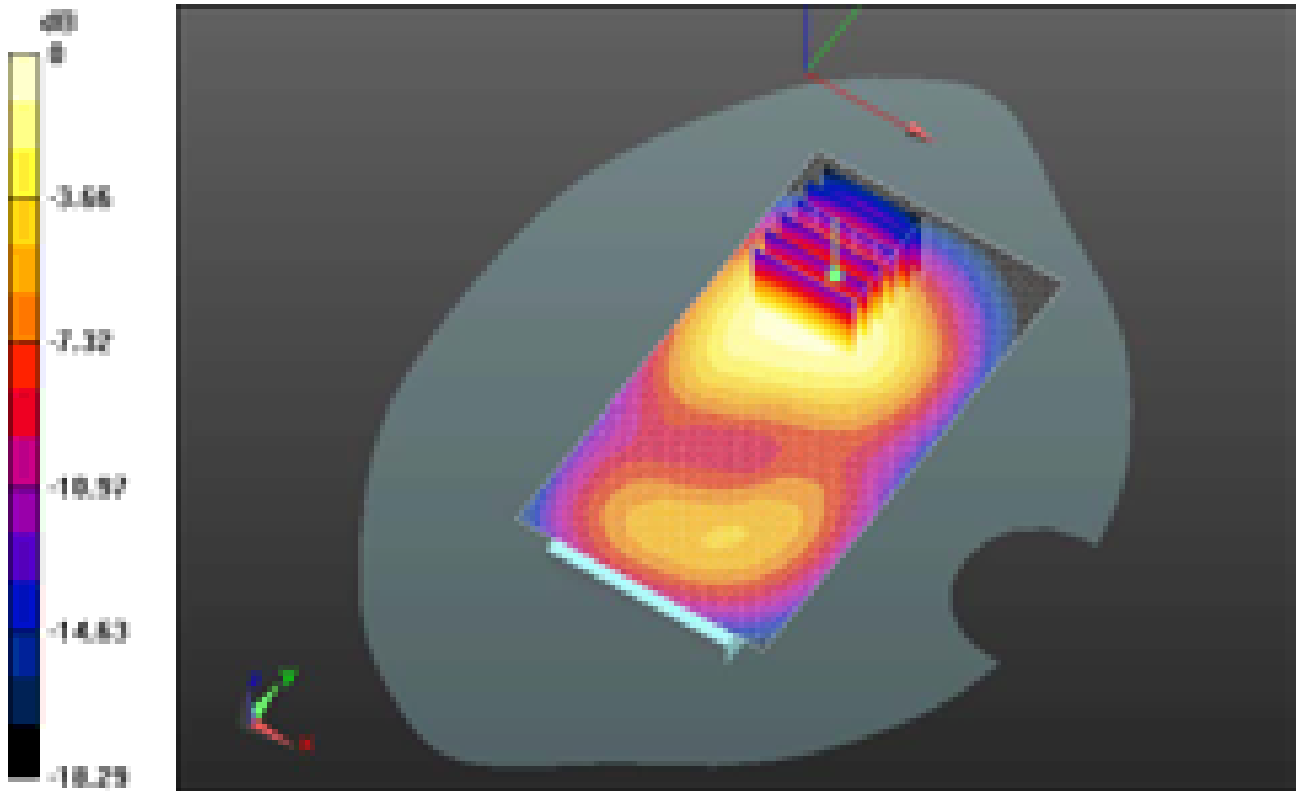

0 dB = 1.320mW/g = 2.41 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>156(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/26/2012 3:27:47 PM

Test Laboratory: RIM Testing Services

## MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_IV\_low\_chan\_amb\_temp\_23.9 \_liq\_temp\_22.8C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz  
Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.487$  mho/m;  $\epsilon_r = 51.313$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.404 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (7x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 11.054 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 1.6350  
**SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.595 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.131 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>157(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

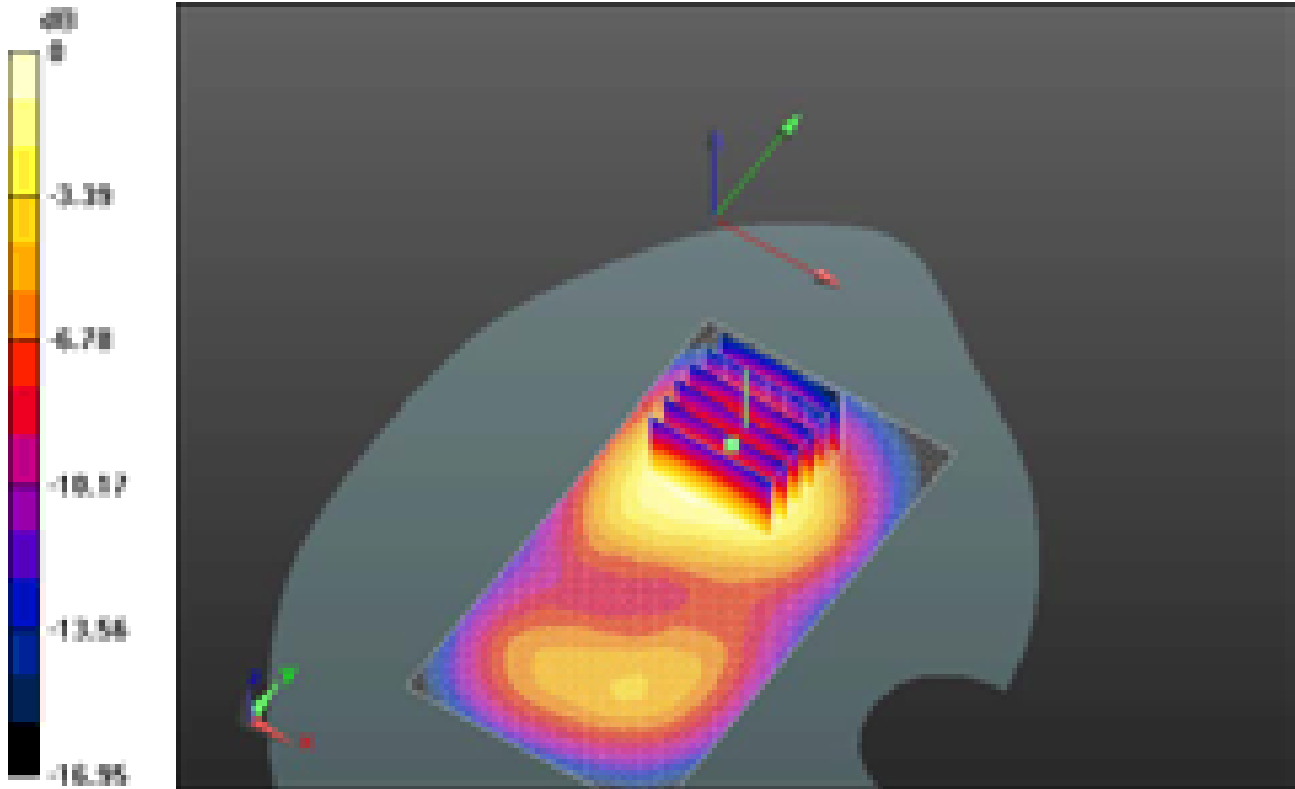

0 dB = 1.130mW/g = 1.06 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>158(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 10/26/2012 3:05:49 PM

Test Laboratory: RIM Testing Services

## MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_IV\_mid\_chan\_amb\_temp\_23.9 \_liq\_temp\_22.7C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.393 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (7x6x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.857 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.6630

**SAR(1 g) = 0.984 mW/g; SAR(10 g) = 0.593 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.170 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>159(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

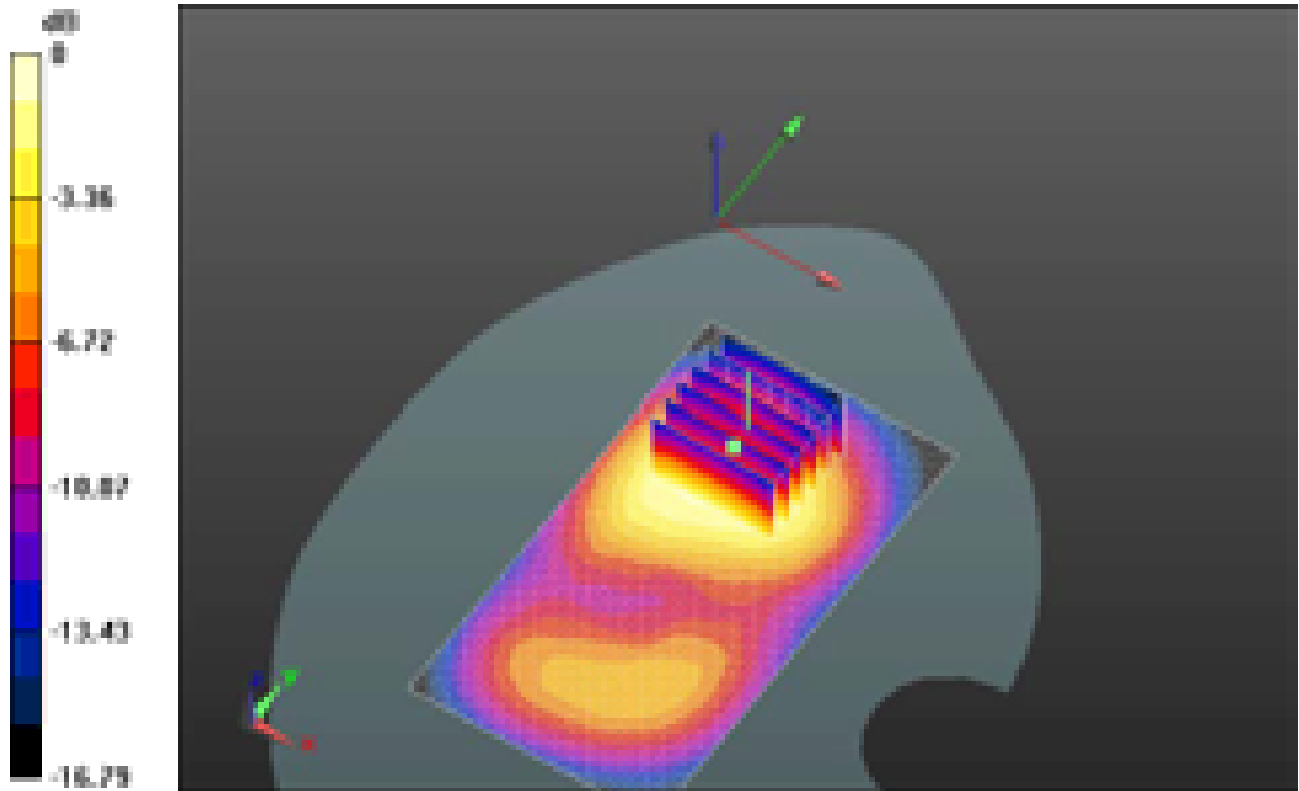

0 dB = 1.170mW/g = 1.36 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>160(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/26/2012 3:51:54 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_IV\_high\_chan\_amb\_temp\_23.  
8\_liq\_temp\_22.7C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz  
Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.525$  mho/m;  $\epsilon_r = 51.284$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.366 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (7x6x7)/Cube 0:**


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 10.593 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 1.7190  
**SAR(1 g) = 0.995 mW/g; SAR(10 g) = 0.581 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.236 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>161(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

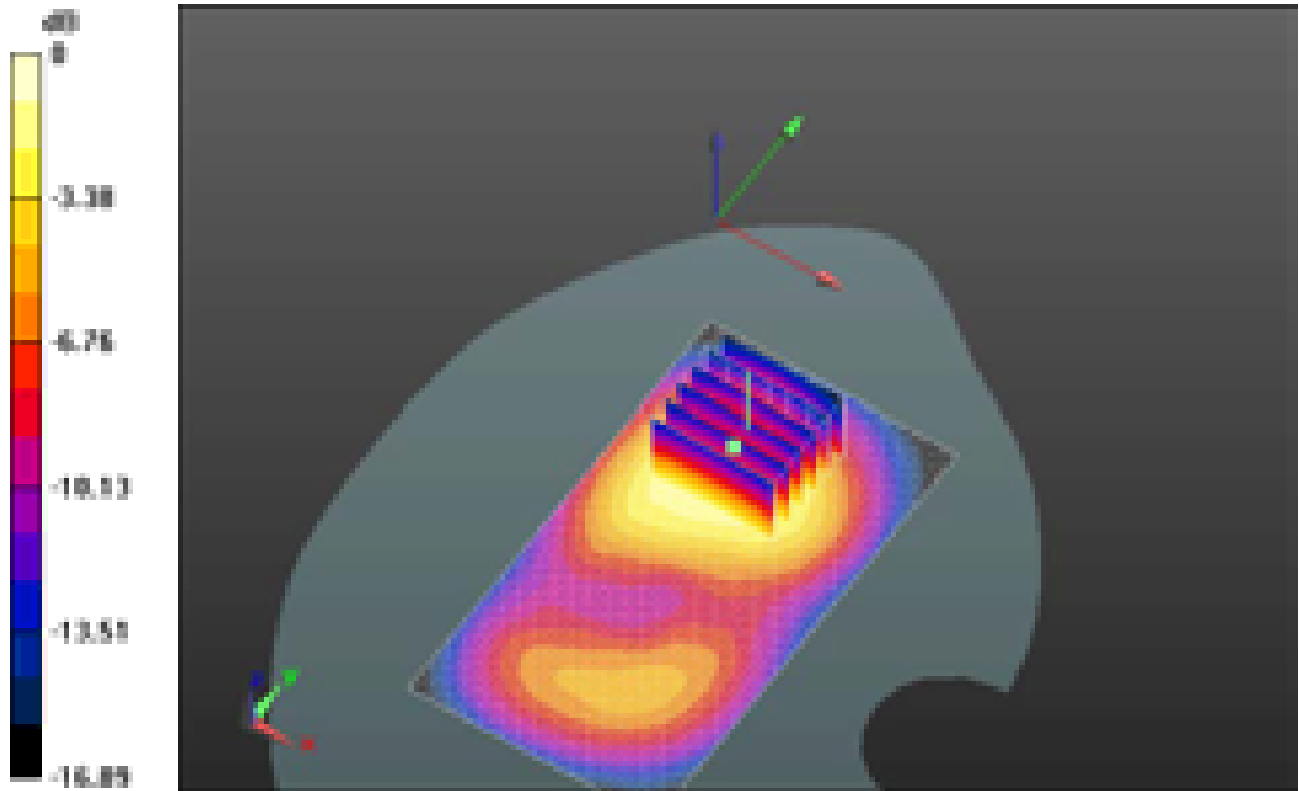

0 dB = 1.240mW/g = 1.87 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>162(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/26/2012 4:51:29 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_UMTS\_Band\_IV\_mid\_chan\_amb\_temp\_23.  
6\_liq\_temp\_22.7C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz  
Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.797 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (7x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 9.049 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 1.0630  
**SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.421 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.780 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>163(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

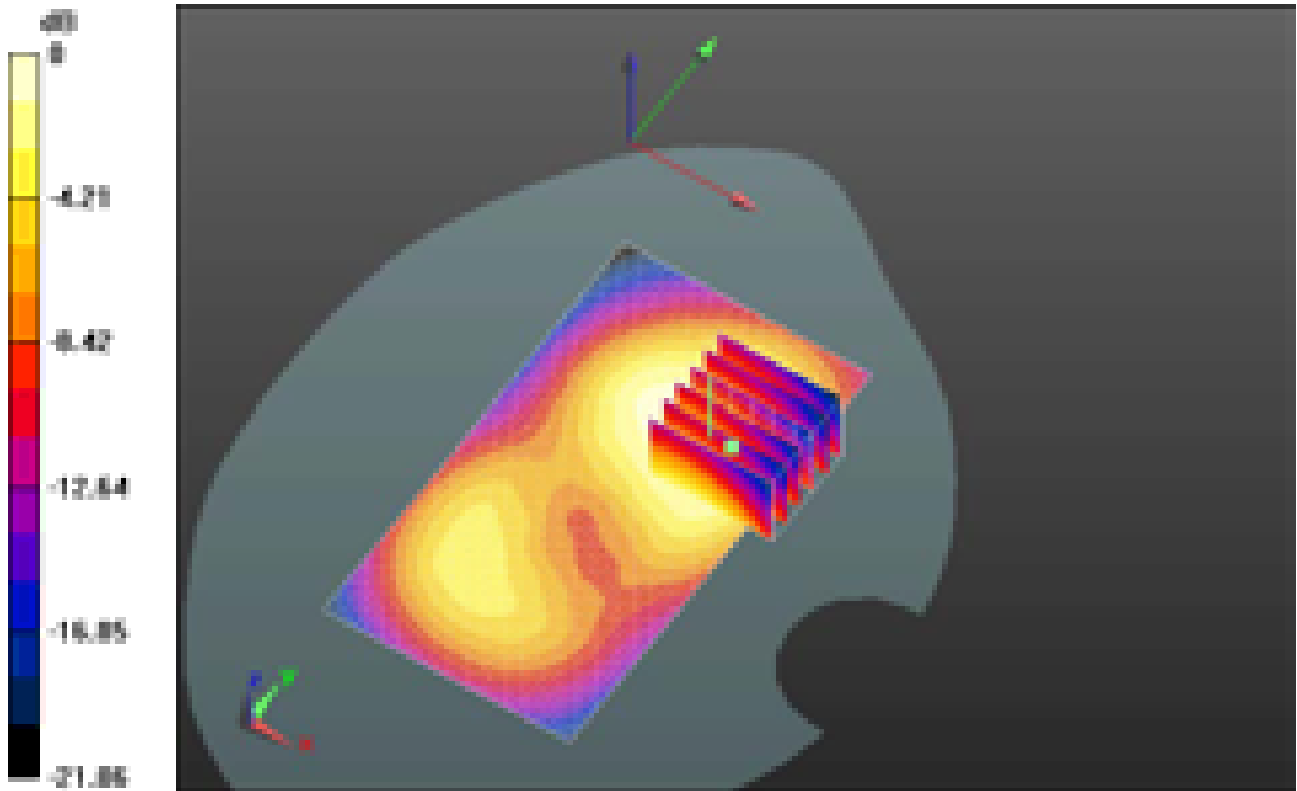

0 dB = 0.780mW/g = -2.16 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>164(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 7:37:25 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_UMTS\_Band\_IV\_mid\_chan\_amb\_temp\_23.2\_  
liq\_temp\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz  
Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.894 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 18.594 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.1780  
**SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.408 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.869 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>165(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

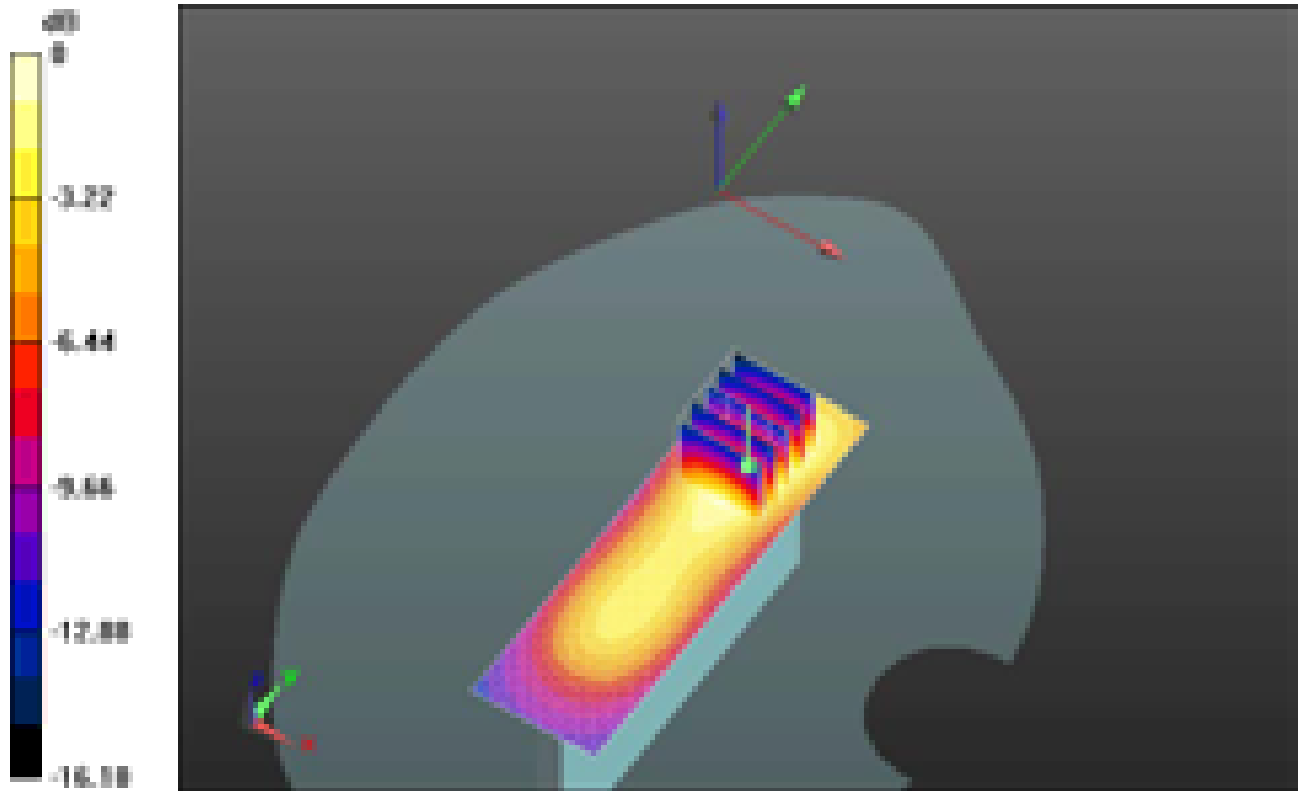

0 dB = 0.870mW/g = -1.21 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>166(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 7:50:52 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_UMTS\_Band\_IV\_mid\_chan\_amb\_temp\_23.  
 2\_liq\_temp\_22.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz  
 Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.462 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
 Reference Value = 15.708 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.6130  
**SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.220 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.459 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>167(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

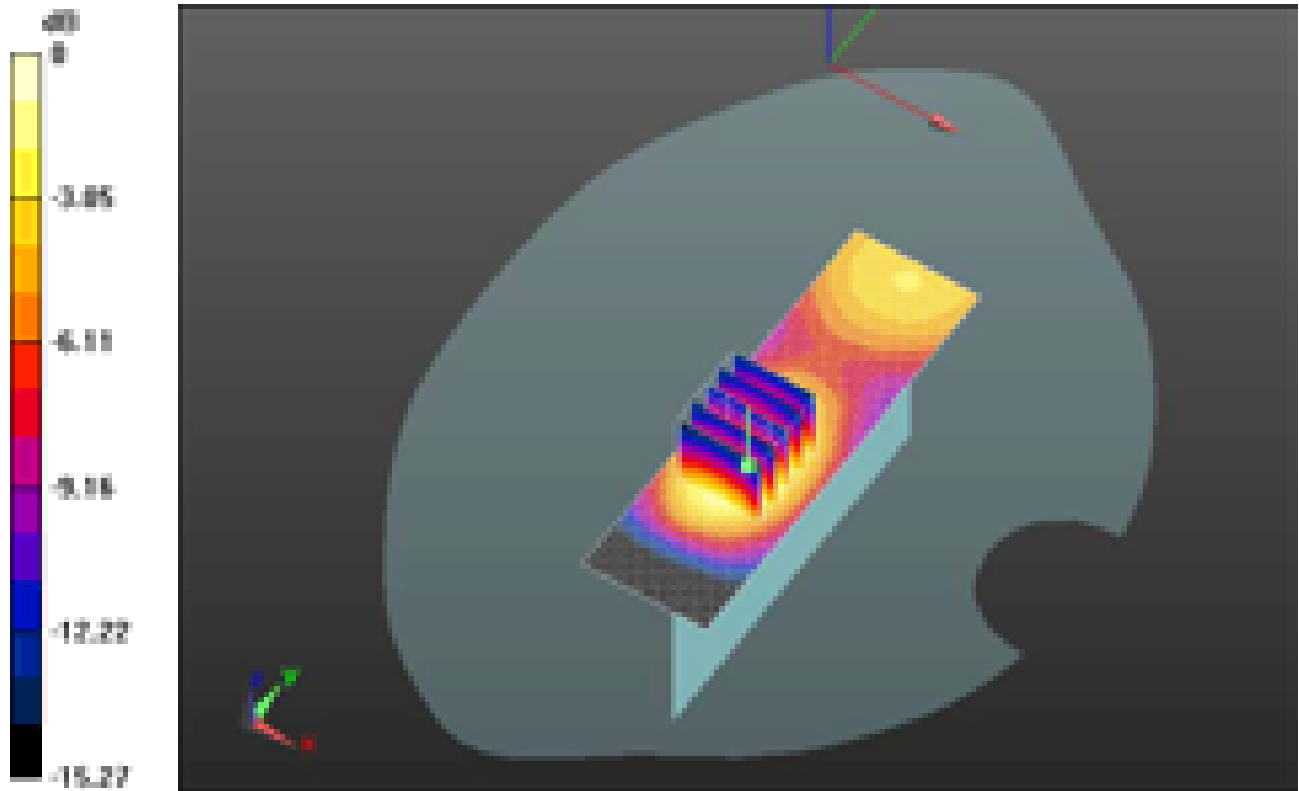

0 dB = 0.460mW/g = -6.74 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>168(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 5:34:38 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_UMTS\_Band\_IV\_low\_chan\_amb\_temp\_23  
.7\_liq\_temp\_22.9C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz  
Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.487$  mho/m;  $\epsilon_r = 51.313$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.000 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 26.677 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 1.5500  
**SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.483 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.129 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>169(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

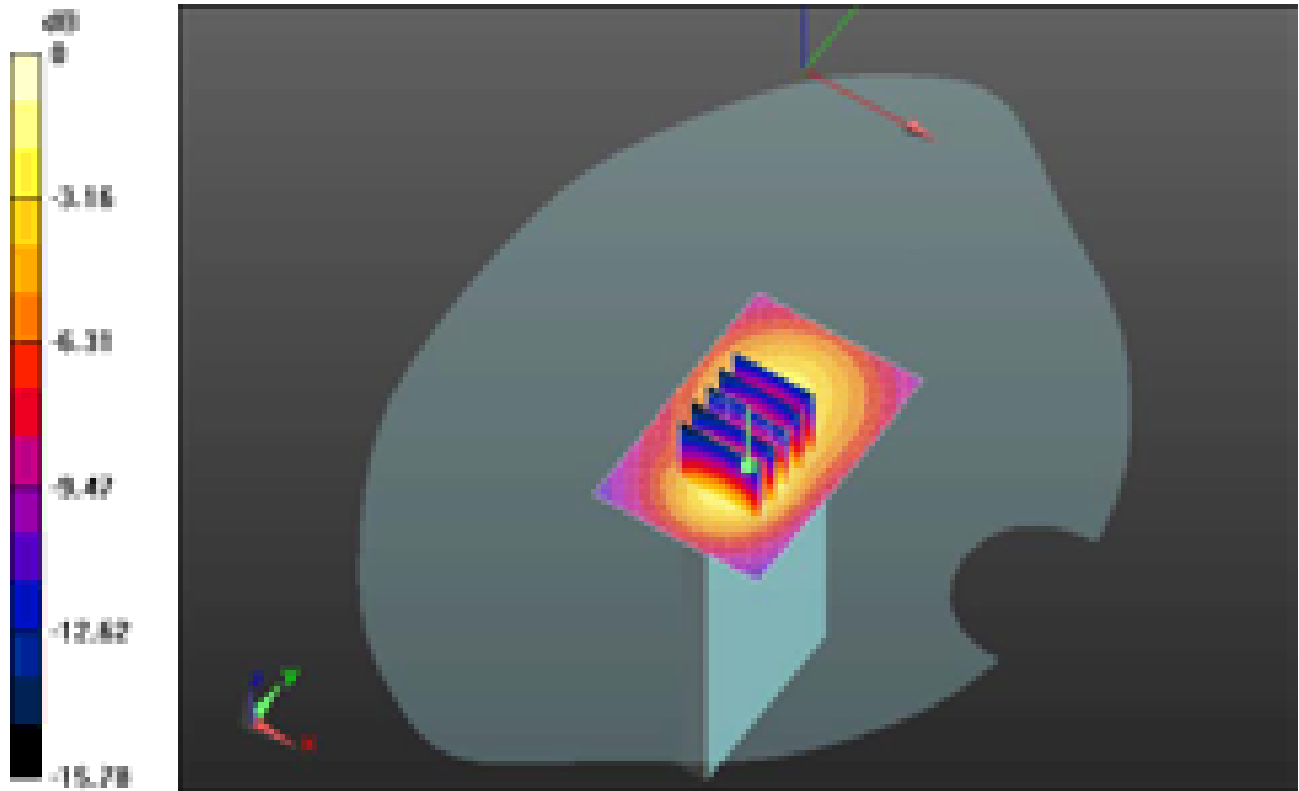

0 dB = 1.130mW/g = 1.06 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>170(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/26/2012 5:18:25 PM

Test Laboratory: RIM Testing Services

## MHS\_10mm\_Spacer\_Bottom\_UMTS\_Band\_IV\_mid\_chan\_amb\_temp\_2 3.9\_liq\_temp\_22.9C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz  
 Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.503$  mho/m;  $\epsilon_r = 51.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.080 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
 Reference Value = 27.047 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 1.6610  
**SAR(1 g) = 0.936 mW/g; SAR(10 g) = 0.505 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.177 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>171(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

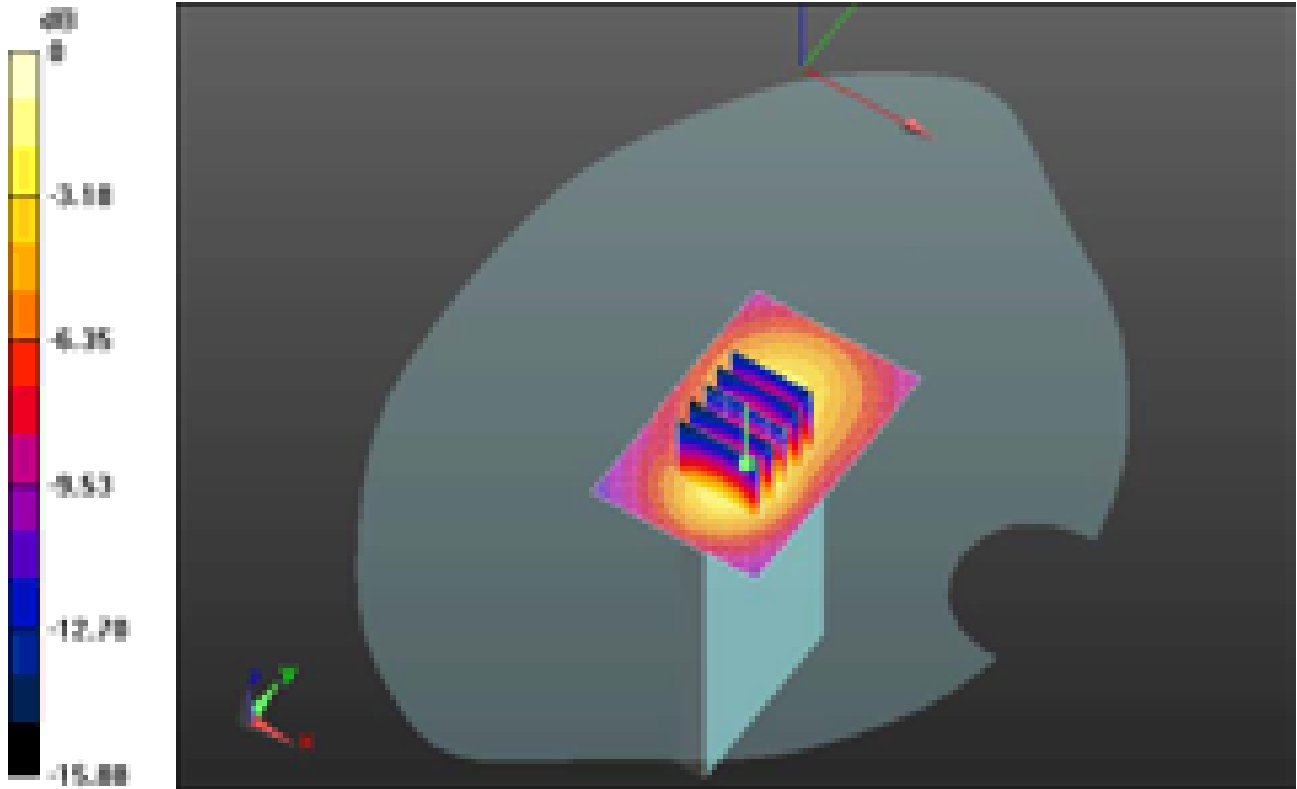

0 dB = 1.180mW/g = 1.44 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>172(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 10/26/2012 5:49:45 PM

Test Laboratory: RIM Testing Services

## MHS\_10mm\_Spacer\_Bottom\_UMTS\_Band\_IV\_high\_chan\_amb\_temp\_2 3.7\_liq\_temp\_22.9C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz  
Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.525$  mho/m;  $\epsilon_r = 51.284$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.137 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 27.374 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.7080  
**SAR(1 g) = 0.966 mW/g; SAR(10 g) = 0.519 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.229 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>173(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

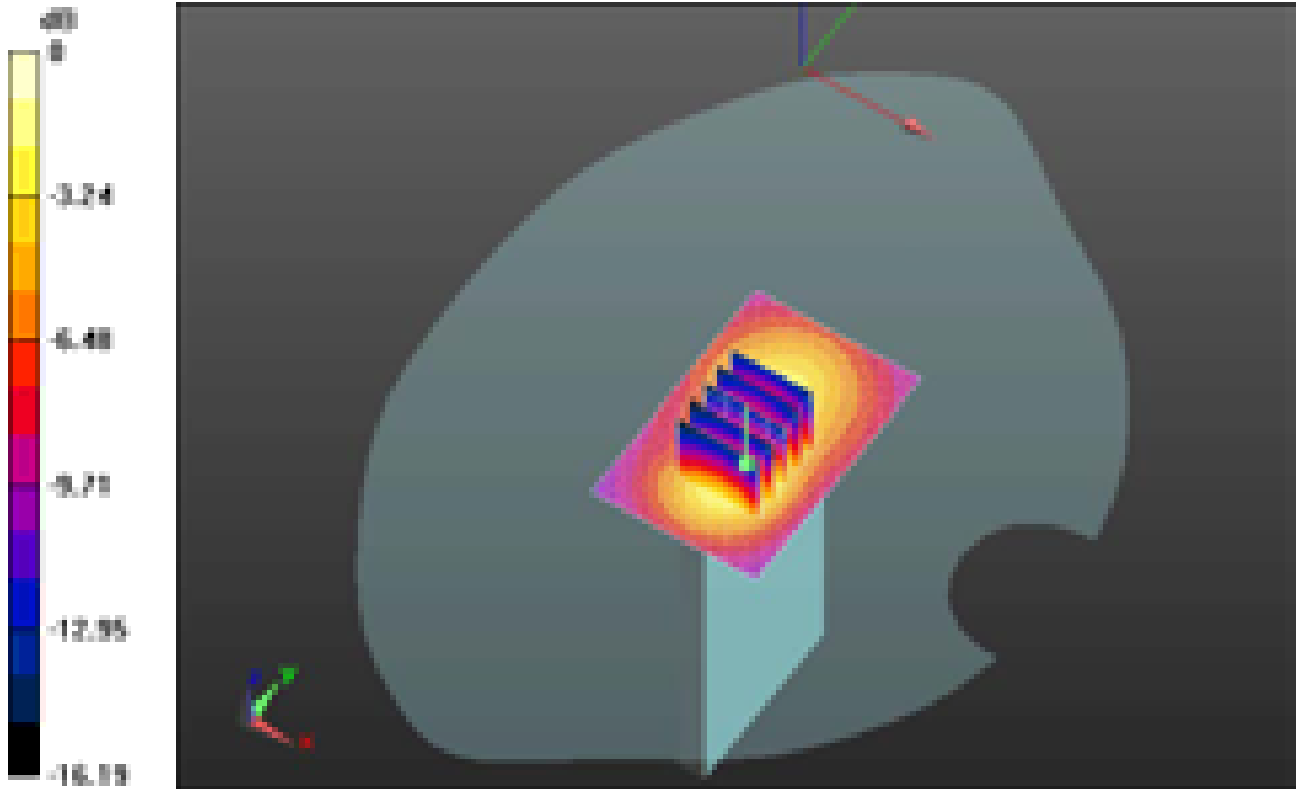

0 dB = 1.230mW/g = 1.80 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>174(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>

Date/Time: 10/26/2012 4:25:15 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_Headset\_UMTS\_Band\_IV\_high\_chan\_amb\_  
temp\_23.8\_liq\_temp\_22.7C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz  
 Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.525$  mho/m;  $\epsilon_r = 51.284$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.309 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (7x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
 Reference Value = 10.648 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 1.6340  
**SAR(1 g) = 0.955 mW/g; SAR(10 g) = 0.560 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.130 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>175(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

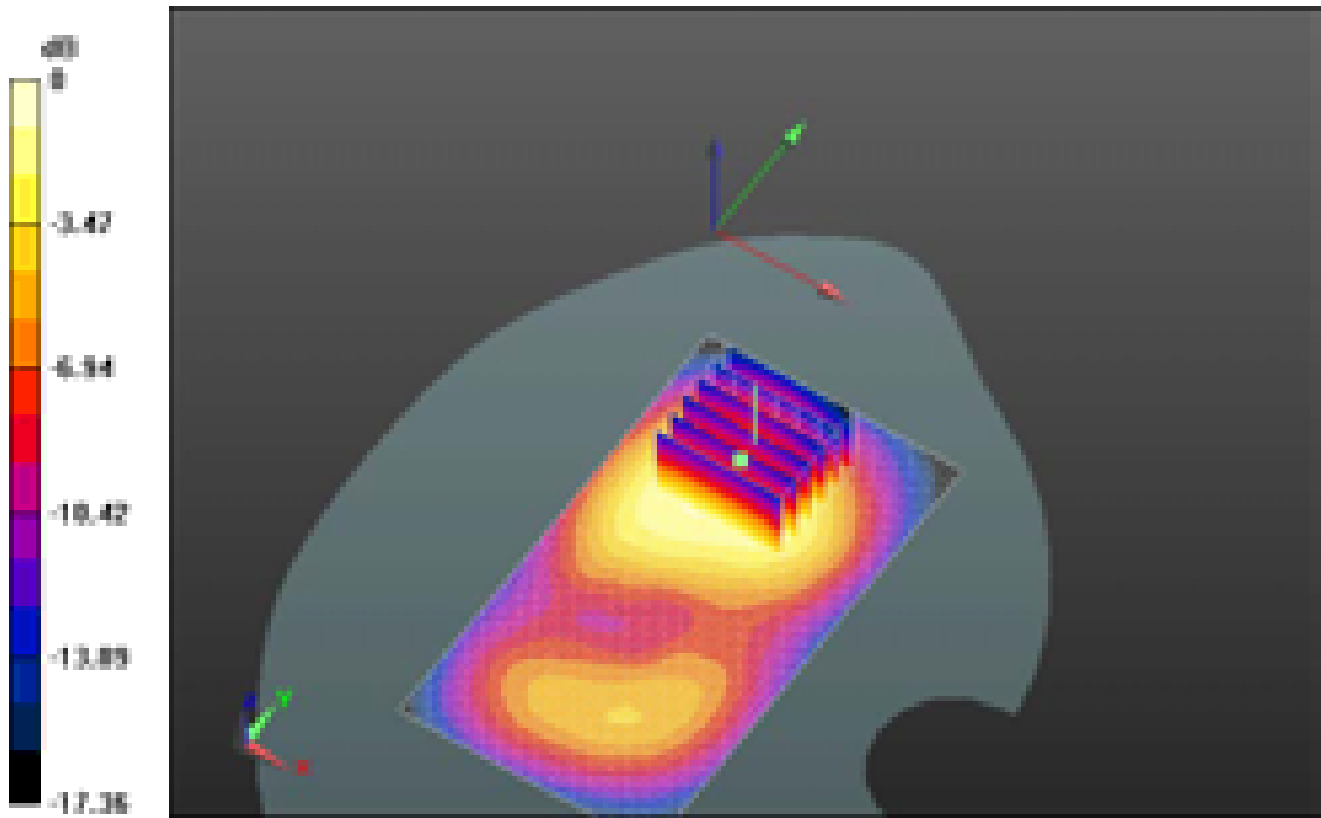

0 dB = 1.130mW/g = 1.06 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>176(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/11/2012 2:57:58 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_A  
mb\_temp\_23.0\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE ; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.688 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 17.623 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.4260

**SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.708 mW/g**


Maximum value of SAR (measured) = 1.675 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>177(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

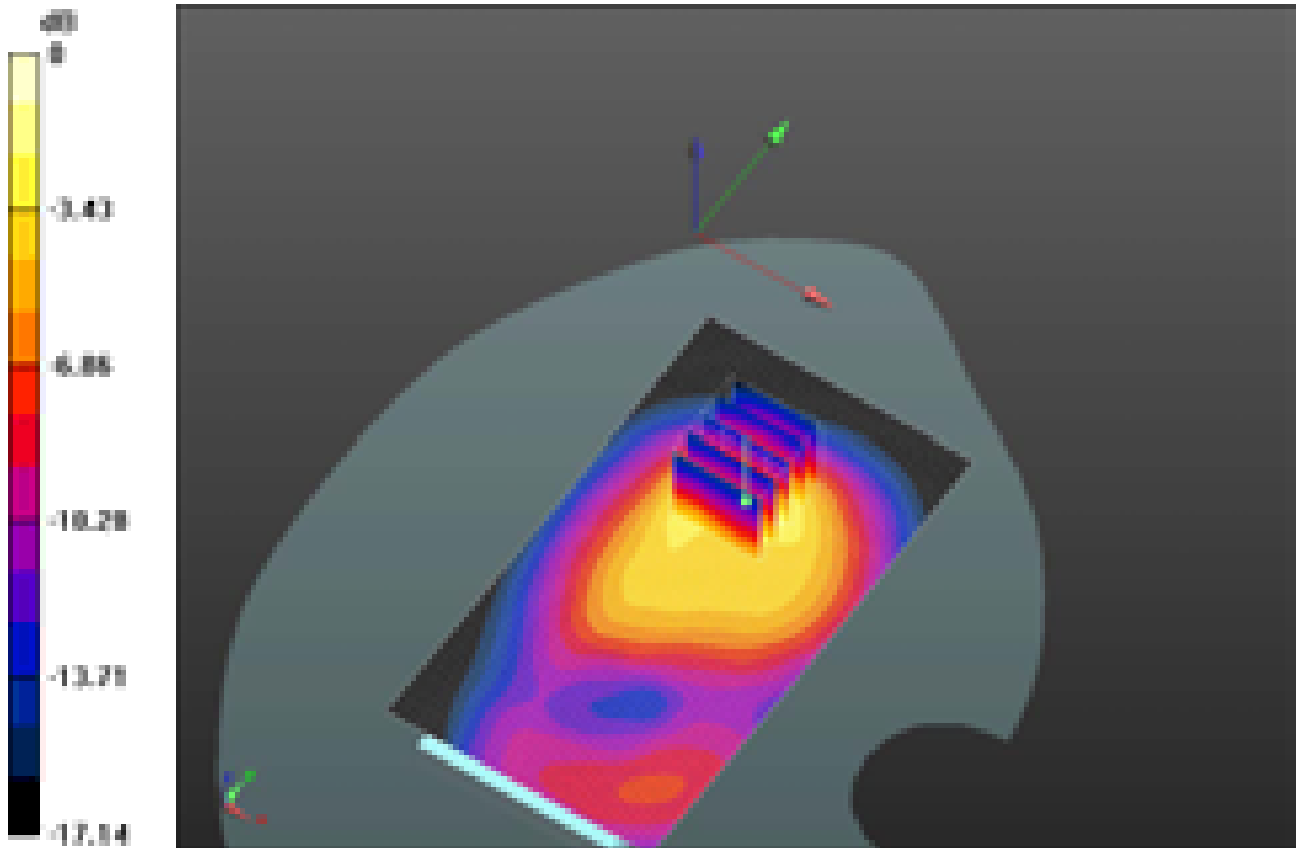

0 dB = 1.680mW/g = 4.51 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>178(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/11/2012 3:16:03 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_99\_amb\_temp\_23.1\_liq\_temp\_21.7C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE ; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.665 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 17.425 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.3780


**SAR(1 g) = 1.33 mW/g; SAR(10 g) = 0.690 mW/g**

Maximum value of SAR (measured) = 1.650 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>179(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

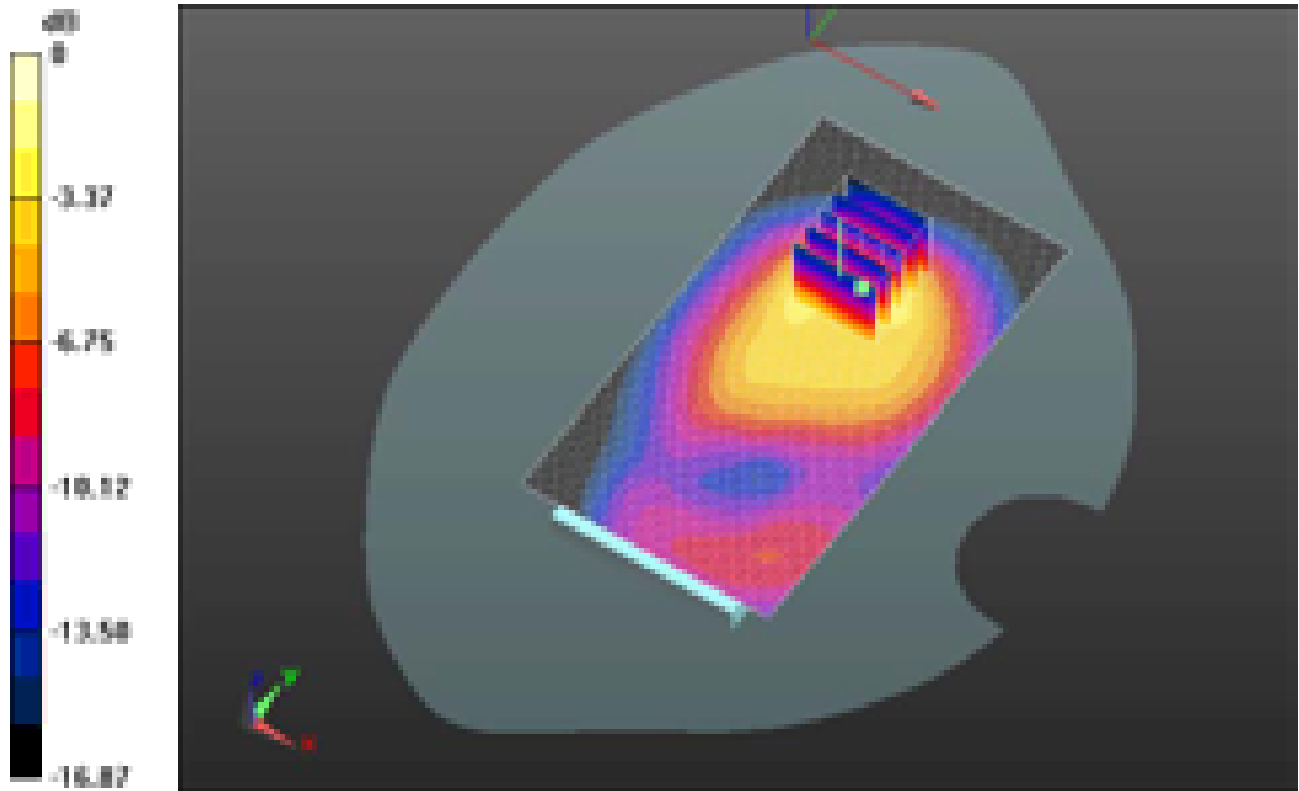

0 dB = 1.650mW/g = 4.35 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>180(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/11/2012 3:37:37 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_QPSK\_RB\_50\_Offset\_0\_amb\_temp\_23.1\_liq\_temp\_21.8C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE ; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.443 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 16.359 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.0630


**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.604 mW/g**

Maximum value of SAR (measured) = 1.413 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>181(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

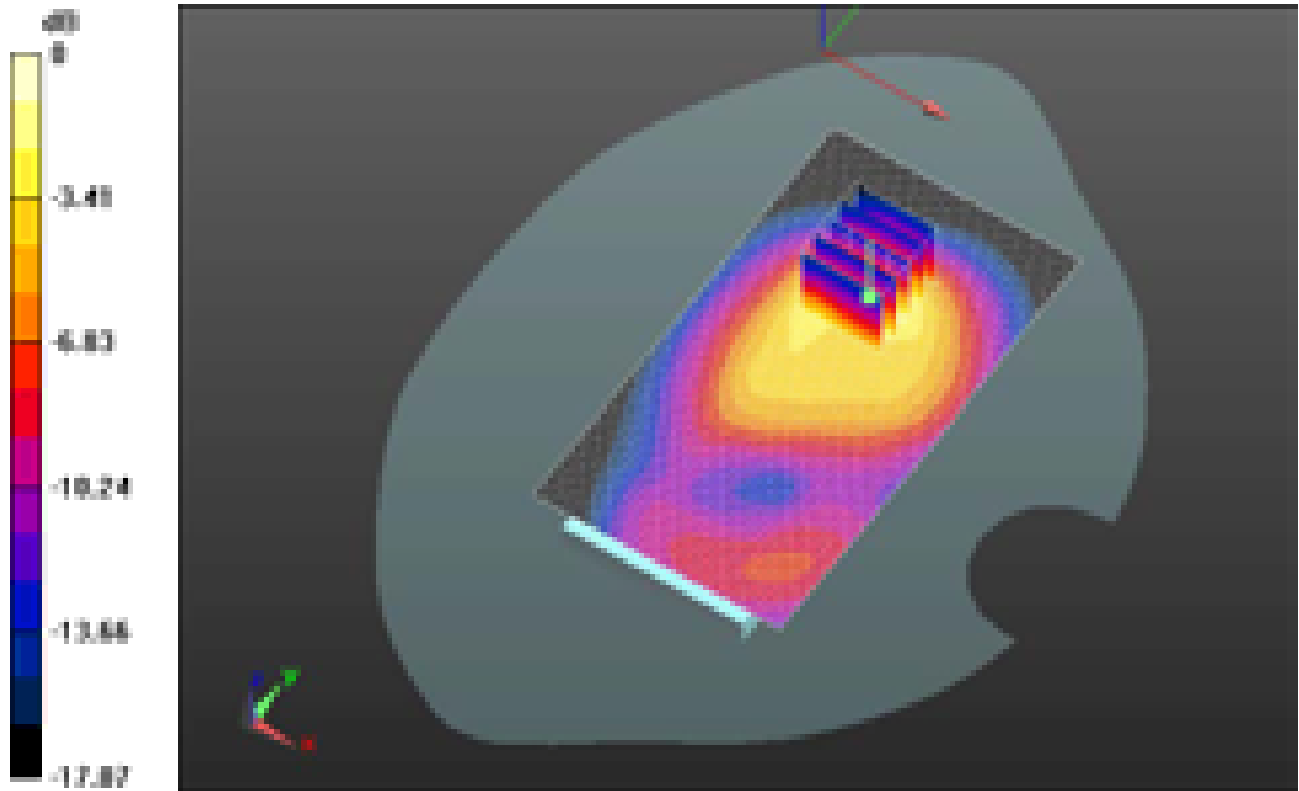

0 dB = 1.410mW/g = 2.98 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>182(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/11/2012 7:44:34 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_16QAM\_RB\_1\_Offset\_0\_amb\_temp\_23.1\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.307 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 8.833 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.6790


**SAR(1 g) = 0.973 mW/g; SAR(10 g) = 0.512 mW/g**

Maximum value of SAR (measured) = 1.232 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>183(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

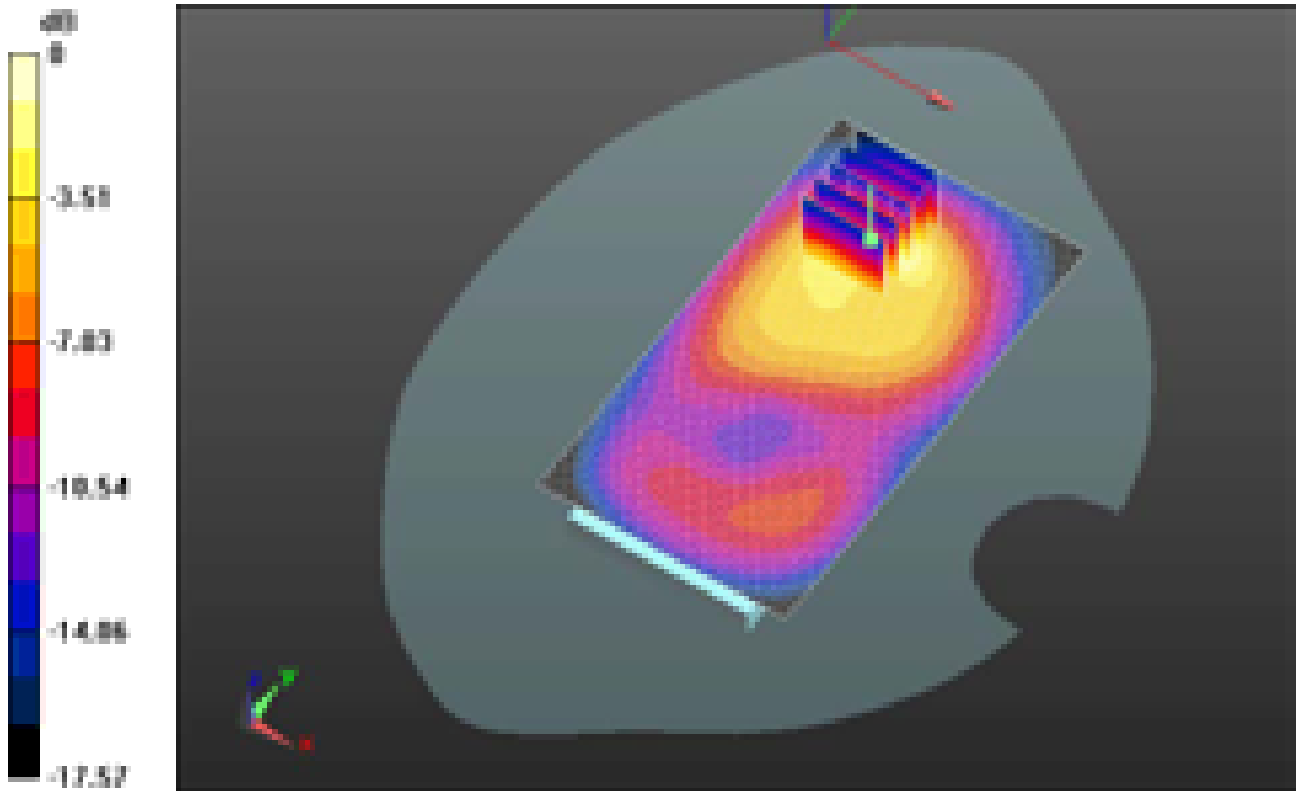

0 dB = 1.230mW/g = 1.80 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>184(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/11/2012 8:01:17 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_16QAM\_RB\_1\_Offset\_99  
\_amb\_temp\_22.8\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.453 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 8.854 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.0670

**SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.569 mW/g**


Maximum value of SAR (measured) = 1.422 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>185(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

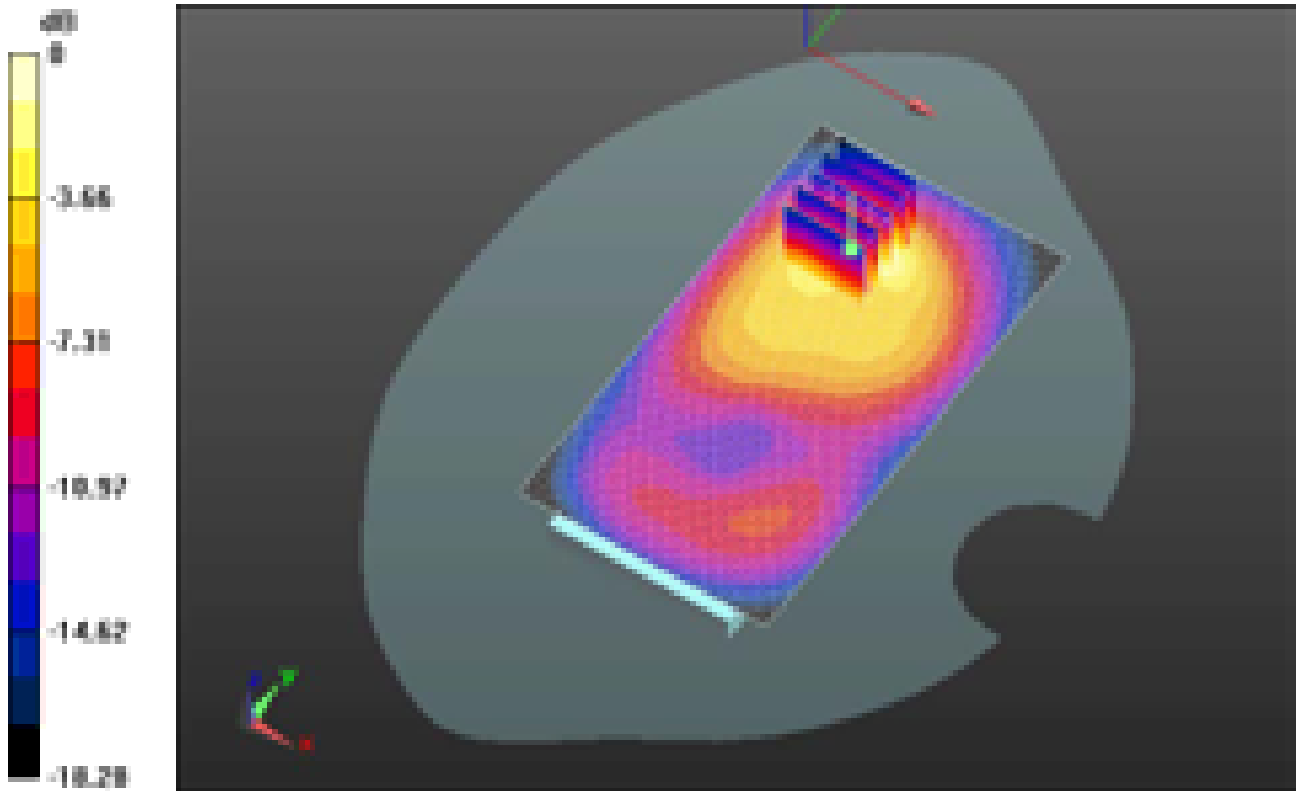

0 dB = 1.420mW/g = 3.05 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>186(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/11/2012 9:23:25 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_16QAM\_RB\_75\_Offset\_0  
\_amb\_temp\_22.6\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.031 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 9.034 V/m; Power Drift = -0.0036 dB

Peak SAR (extrapolated) = 1.4220


**SAR(1 g) = 0.799 mW/g; SAR(10 g) = 0.424 mW/g**

Maximum value of SAR (measured) = 1.025 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>187(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

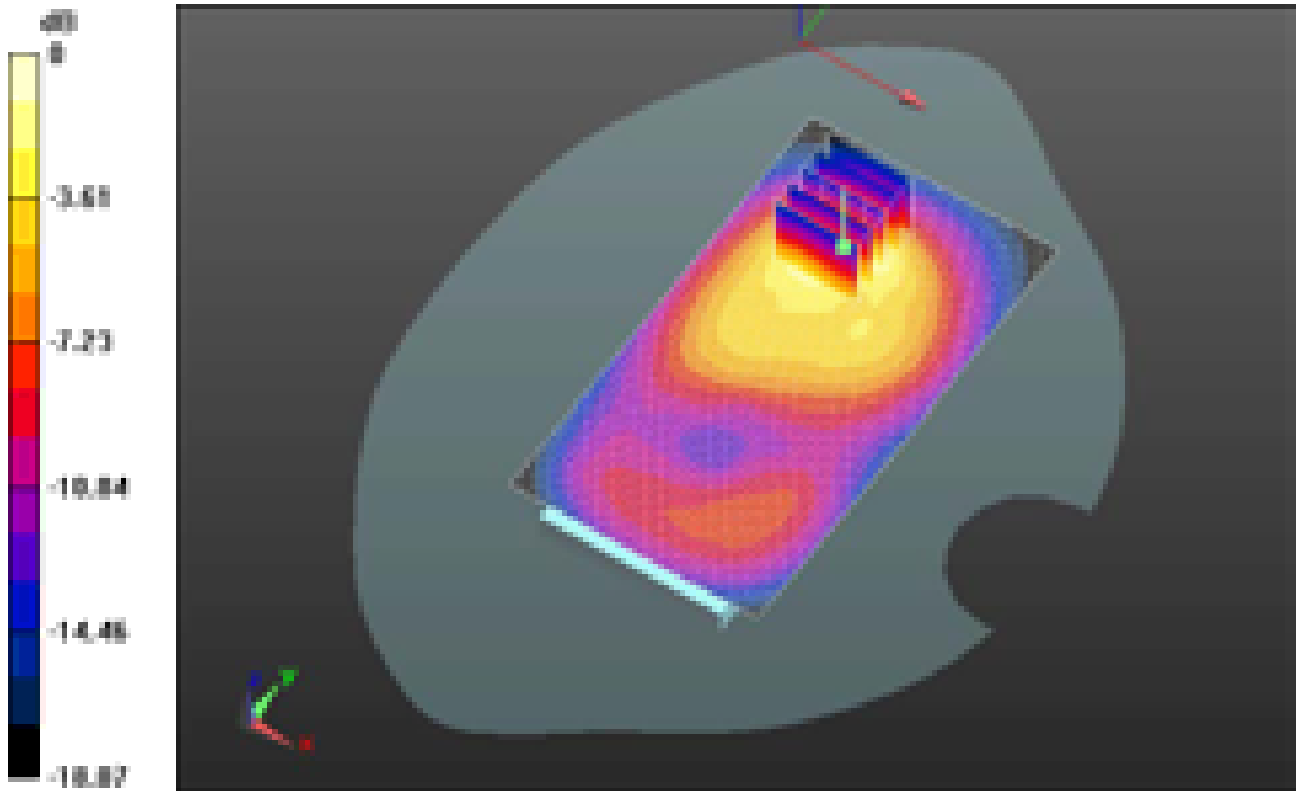

0 dB = 1.020mW/g = 0.17 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>188(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/11/2012 4:07:41 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_low\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_23.0\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1860 MHz

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.499$  mho/m;  $\epsilon_r = 50.873$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.353 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 16.568 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 1.9480


**SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.584 mW/g**

Maximum value of SAR (measured) = 1.300 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>189(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

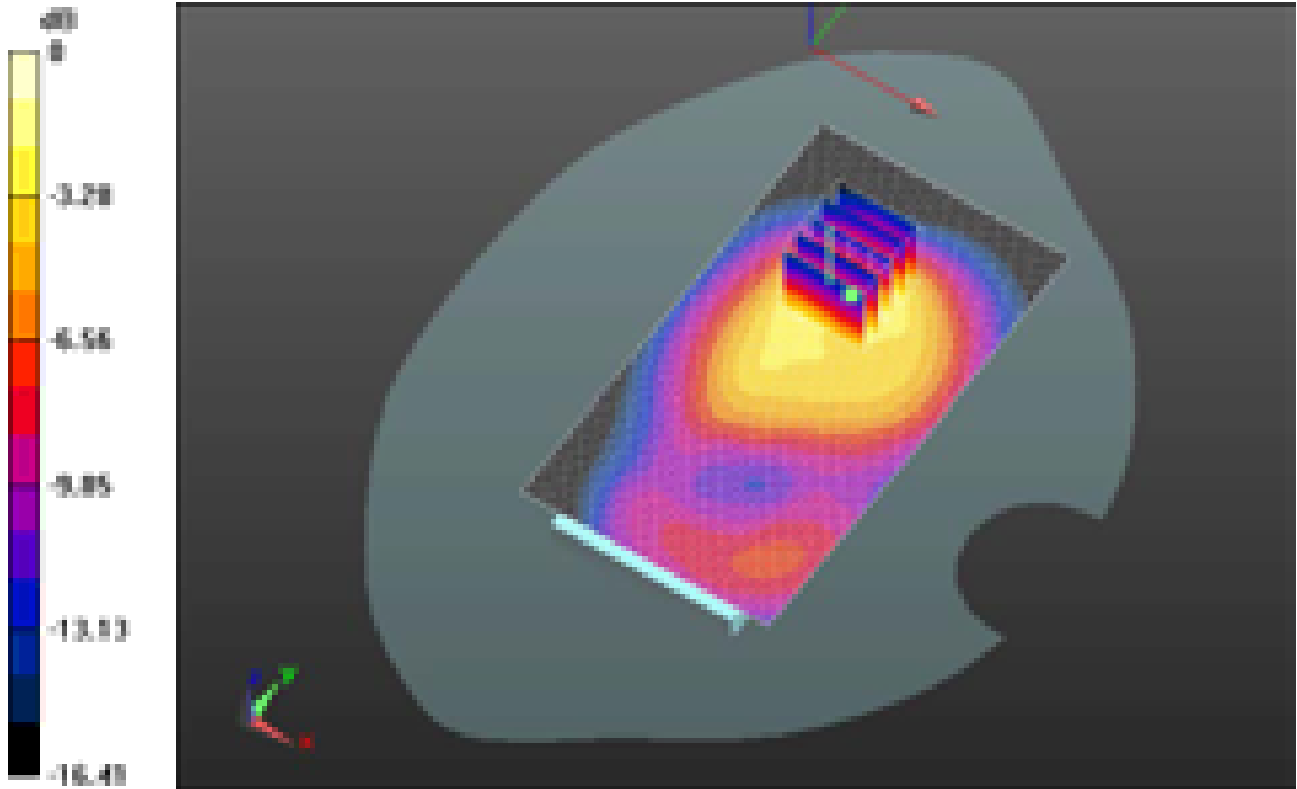

0 dB = 1.300mW/g = 2.28 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>190(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/11/2012 7:19:25 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_high\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_23.1\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.547$  mho/m;  $\epsilon_r = 50.764$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.691 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 9.546 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.2950


**SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.641 mW/g**

Maximum value of SAR (measured) = 1.604 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>191(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

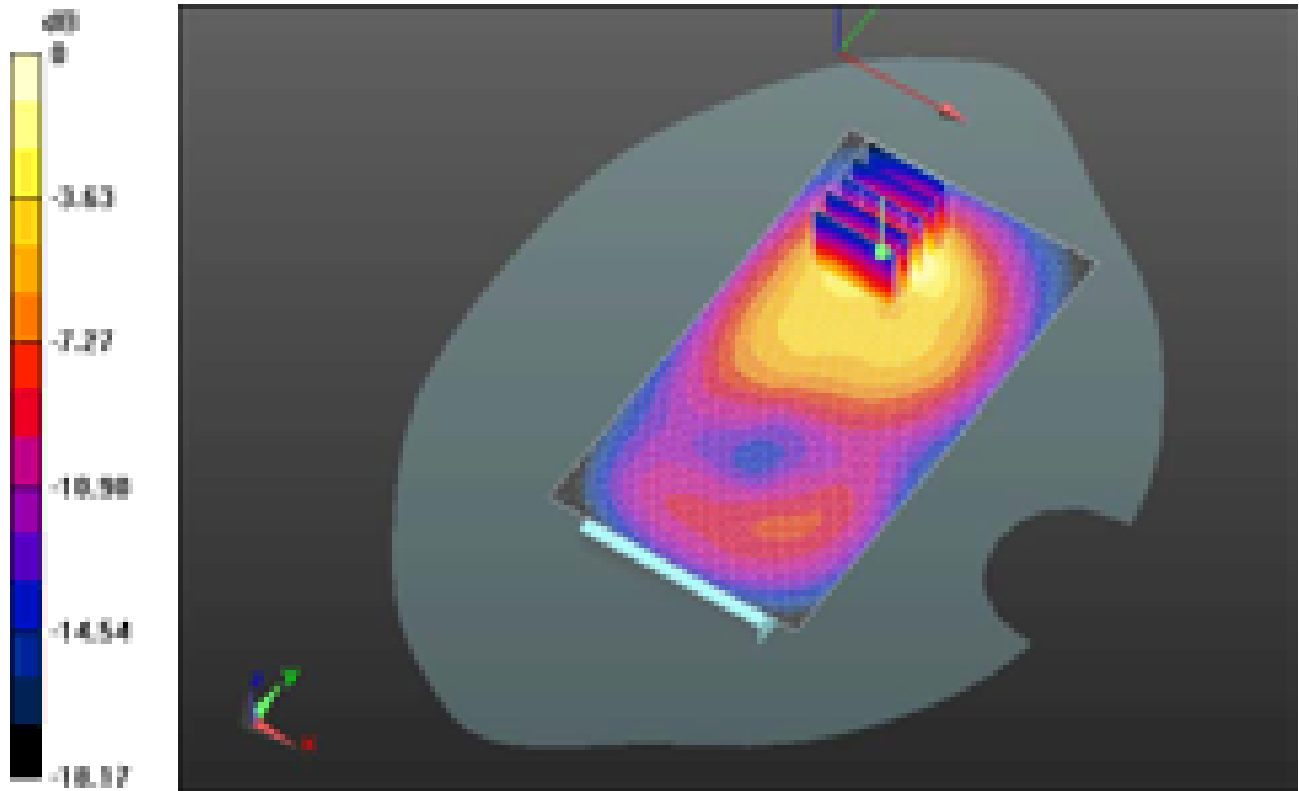

0 dB = 1.600mW/g = 4.08 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>192(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/11/2012 10:27:49 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_22.8\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.661 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 8.385 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.8420

**SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.321 mW/g**


Maximum value of SAR (measured) = 0.624 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>193(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

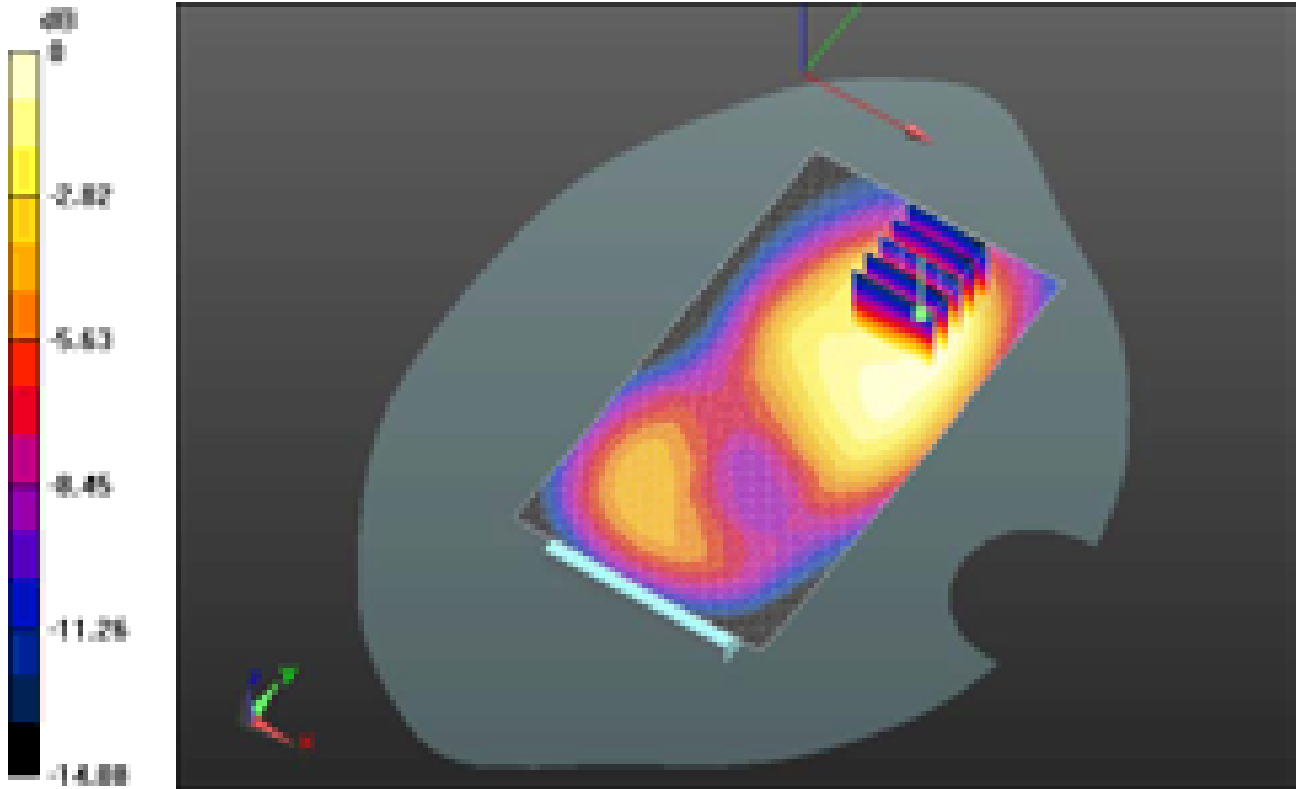

0 dB = 0.620mW/g = -4.15 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>194(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/12/2012 1:00:31 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_am  
b\_temp\_22.7\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.427 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.343 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.5720


**SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.190 mW/g**

Maximum value of SAR (measured) = 0.415 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>195(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

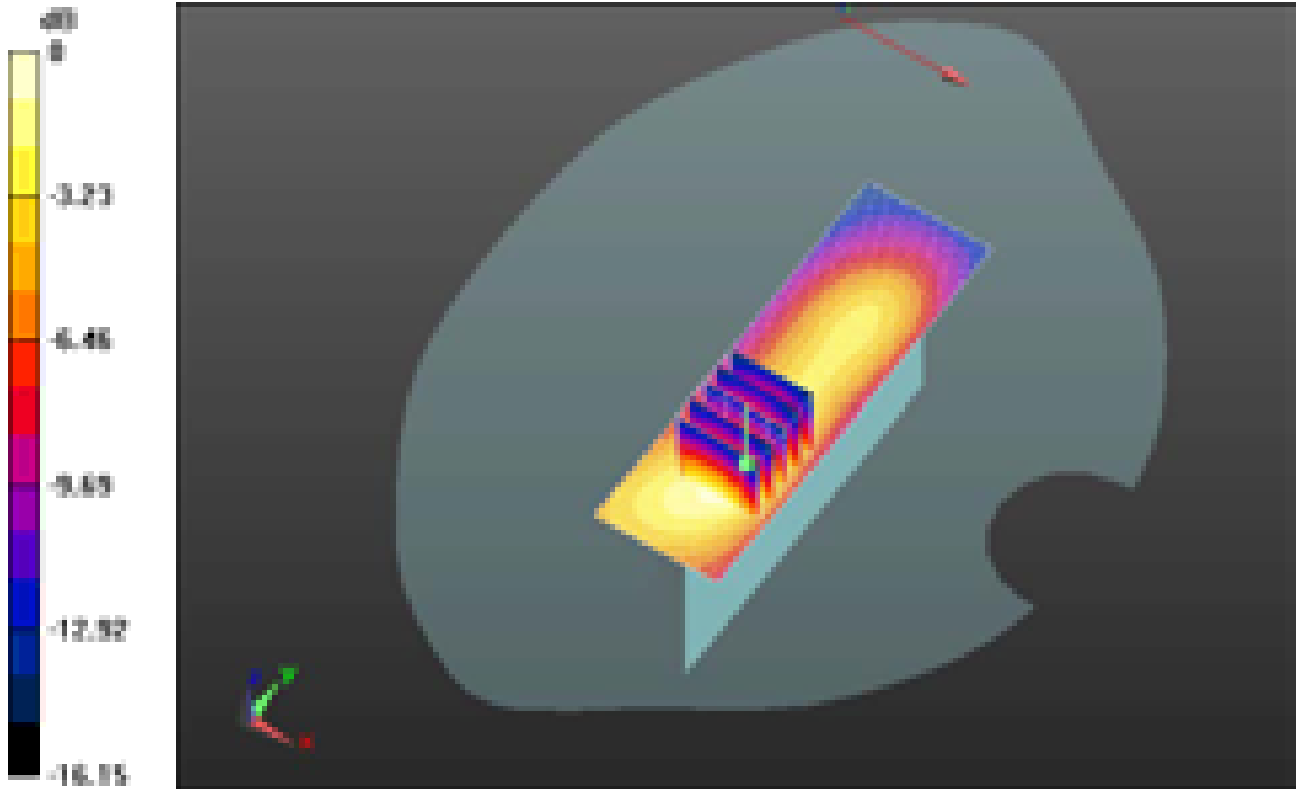

0 dB = 0.410mW/g = -7.74 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>196(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/12/2012 1:13:46 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_a  
mb\_temp\_23.1\_liq\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.210 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 10.233 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.2790


**SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.100 mW/g**

Maximum value of SAR (measured) = 0.211 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>197(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

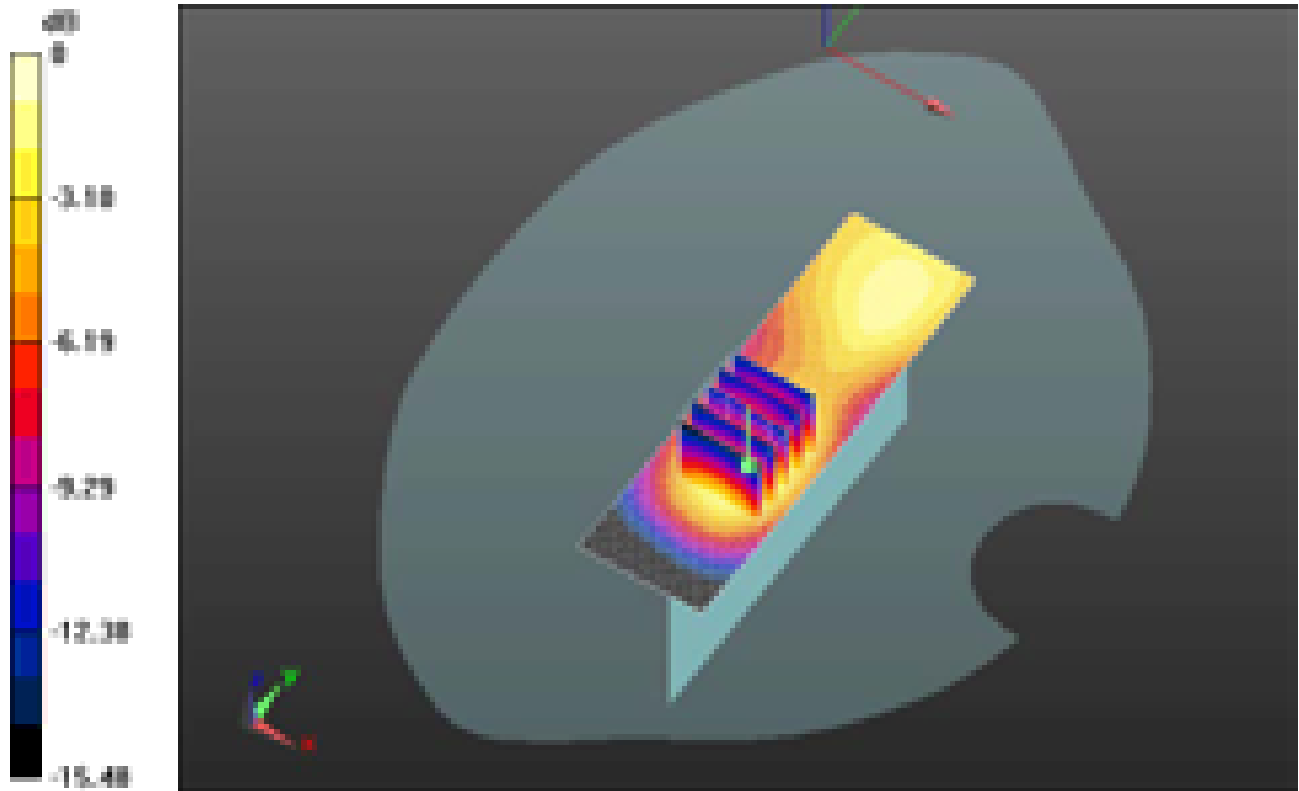

0 dB = 0.210mW/g = -13.56 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>198(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/12/2012 12:32:17 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_LTE\_2\_low\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_23.0\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: LTE; Frequency: 1860 MHz

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.499$  mho/m;  $\epsilon_r = 50.873$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.978 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 24.841 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.3950


**SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.467 mW/g**

Maximum value of SAR (measured) = 1.048 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>199(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

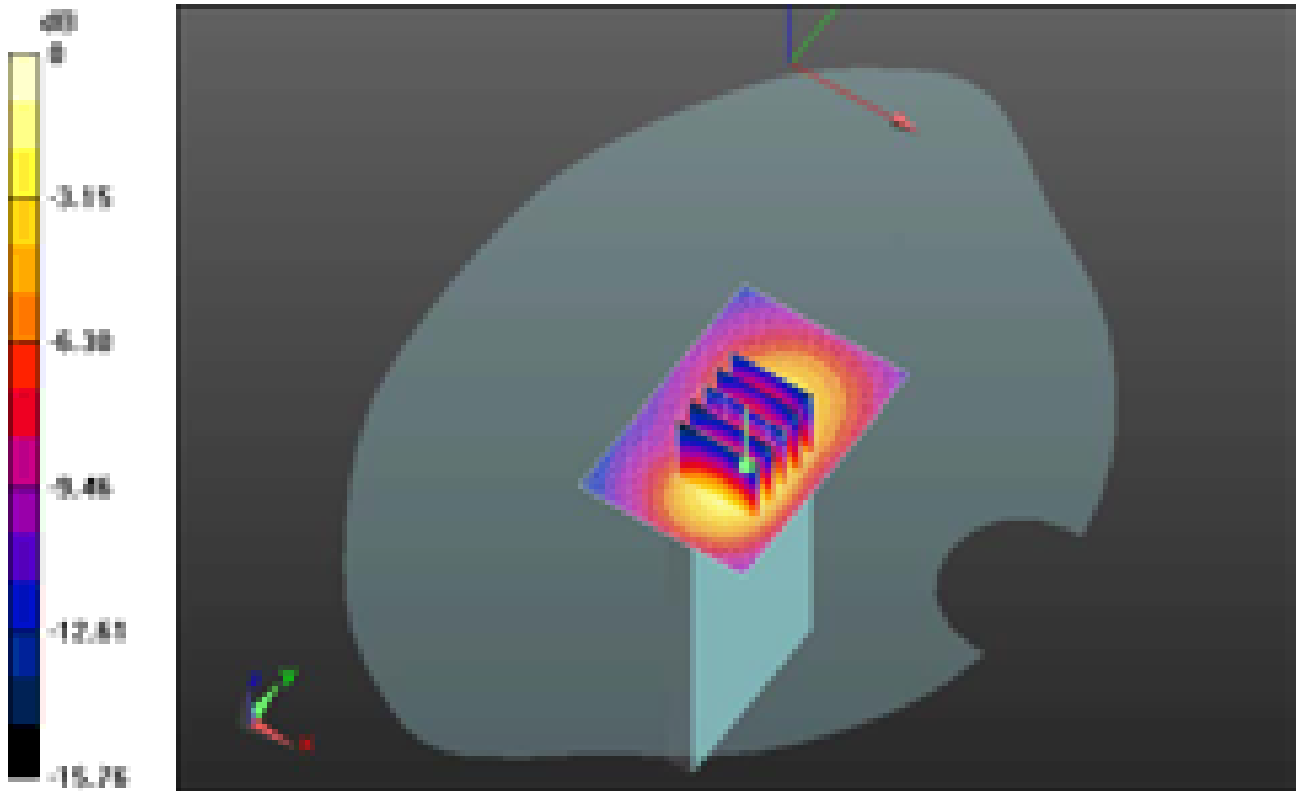

0 dB = 1.050mW/g = 0.42 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>200(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/11/2012 11:51:56 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_22.7\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.972 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 24.550 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.4300

**SAR(1 g) = 0.831 mW/g; SAR(10 g) = 0.456 mW/g**


Maximum value of SAR (measured) = 1.058 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>201(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

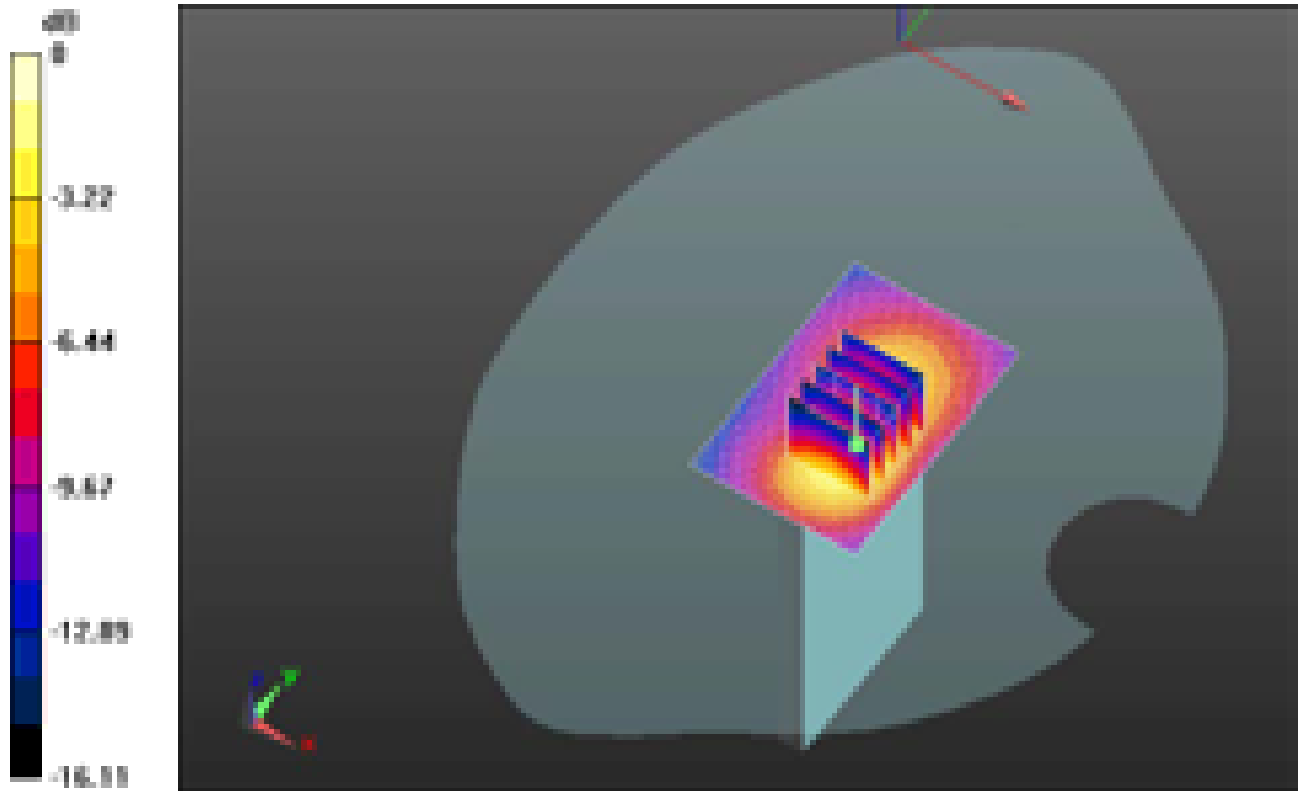

0 dB = 1.060mW/g = 0.51 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>202(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/12/2012 12:44:03 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_LTE\_2\_high\_chan\_QPSK\_RB\_1\_Offset\_0  
\_amb\_temp\_22.8\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: LTE; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.547$  mho/m;  $\epsilon_r = 50.764$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.061 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 25.172 V/m; Power Drift = 0.0025 dB

Peak SAR (extrapolated) = 1.5140


**SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.488 mW/g**

Maximum value of SAR (measured) = 1.126 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>203(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

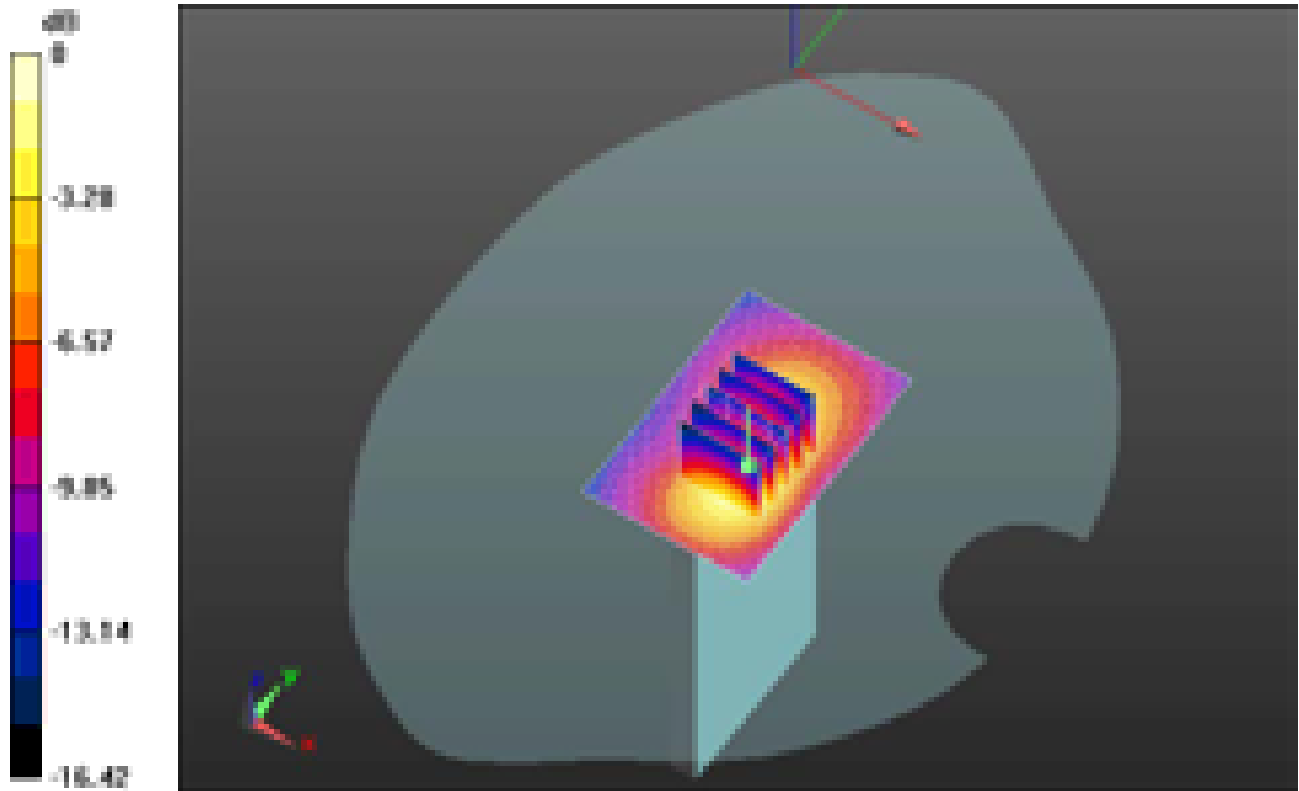

0 dB = 1.130mW/g = 1.06 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>204(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/12/2012 2:22:56 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_Headset\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_  
 Offset\_0\_amb\_temp\_23.2\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: LTE; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.786 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 14.575 V/m; Power Drift = -0.27 dB

Peak SAR (extrapolated) = 2.3220


**SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.663 mW/g**

Maximum value of SAR (measured) = 1.577 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>205(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

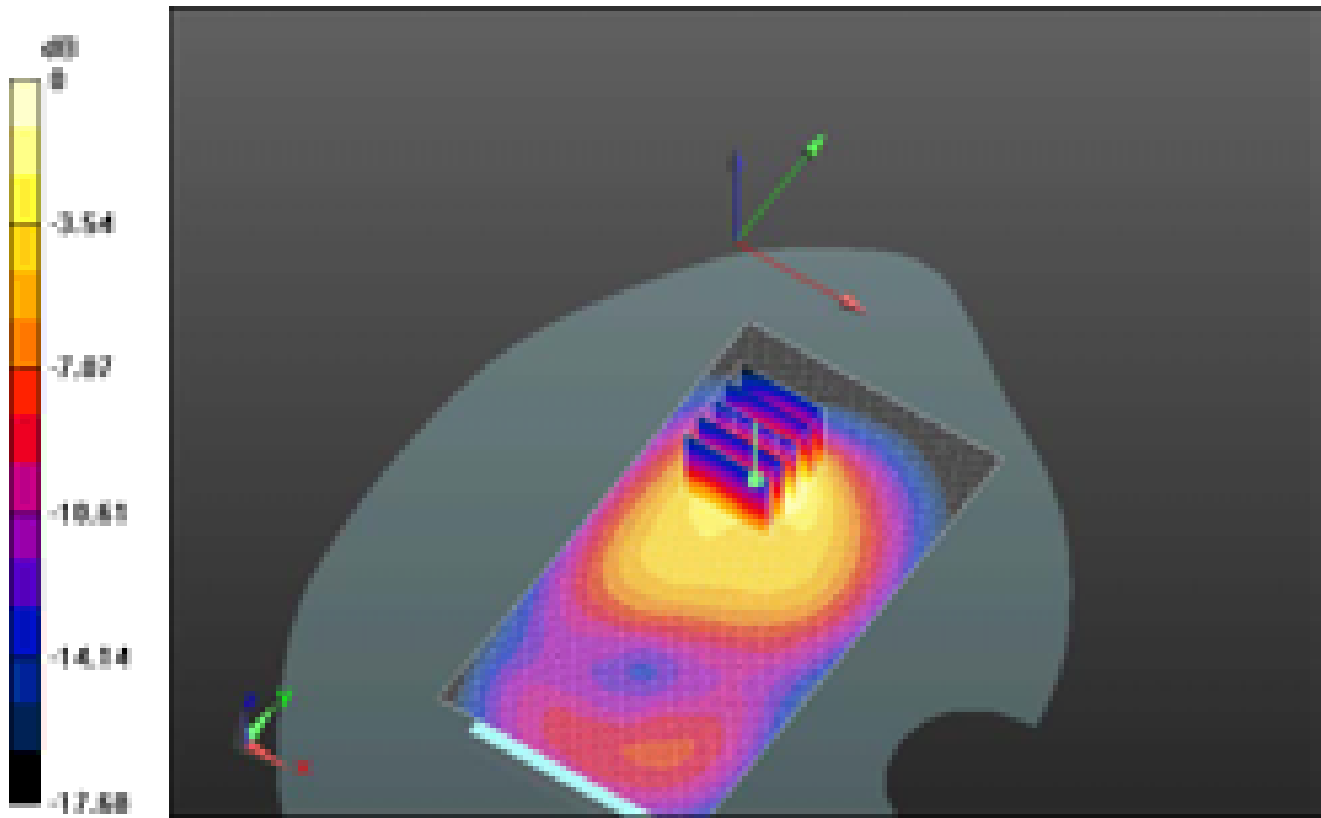

0 dB = 1.580mW/g = 3.97 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>206(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 9/27/2012 3:57:31 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_23.7\_liq\_temp\_22.6C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE ; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.568$  mho/m;  $\epsilon_r = 51.052$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.626 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.365 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.6070


**SAR(1 g) = 1.45 mW/g; SAR(10 g) = 0.762 mW/g**

Maximum value of SAR (measured) = 1.804 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>207(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

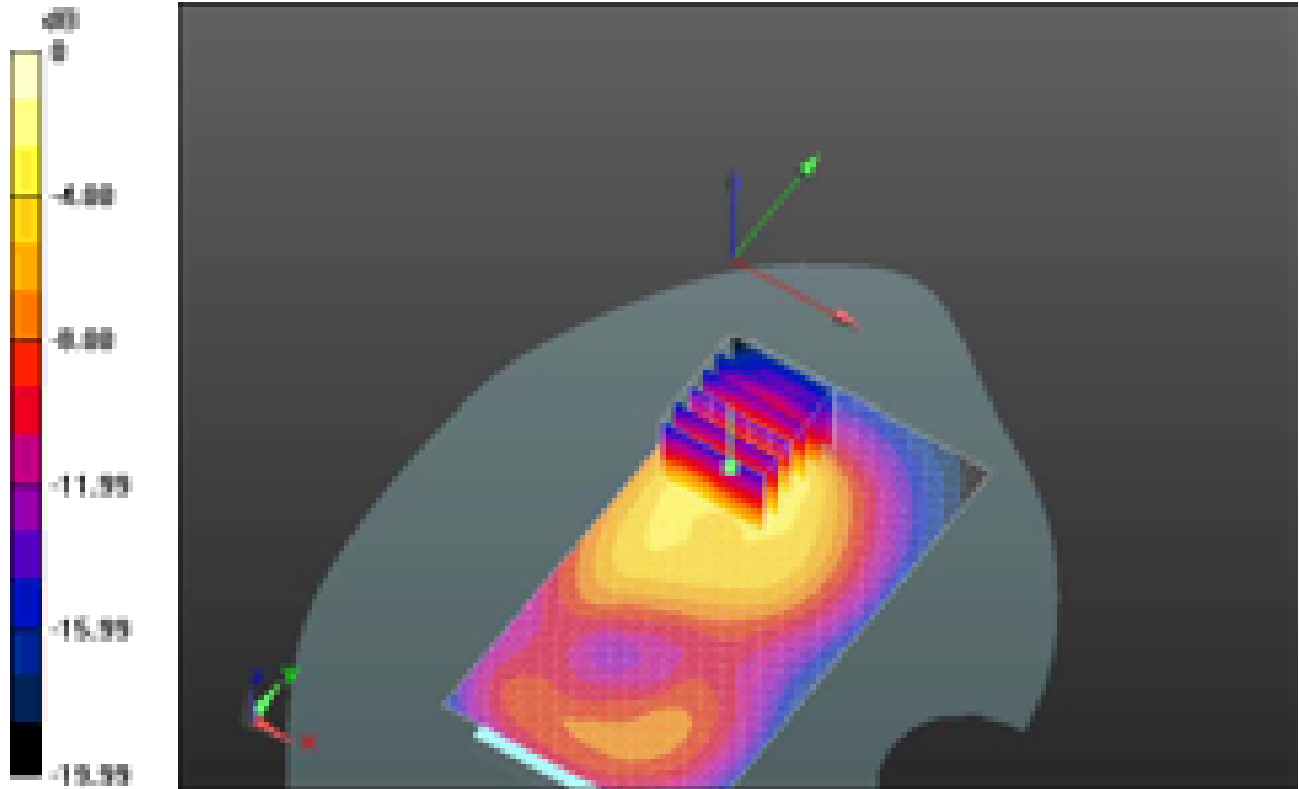

0 dB = 1.800mW/g = 5.11 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>208(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 10/23/2012 10:50:26 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_LTE\_2\_mid\_chan\_QPSK\_RB\_1\_Offset\_0\_amb\_temp\_23.8\_liq\_temp\_22.9C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: LTE 1900\_Band 2; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.485$  mho/m;  $\epsilon_r = 51.584$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.398 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 9.737 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.9940

**SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.574 mW/g**


Maximum value of SAR (measured) = 1.405 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>209(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

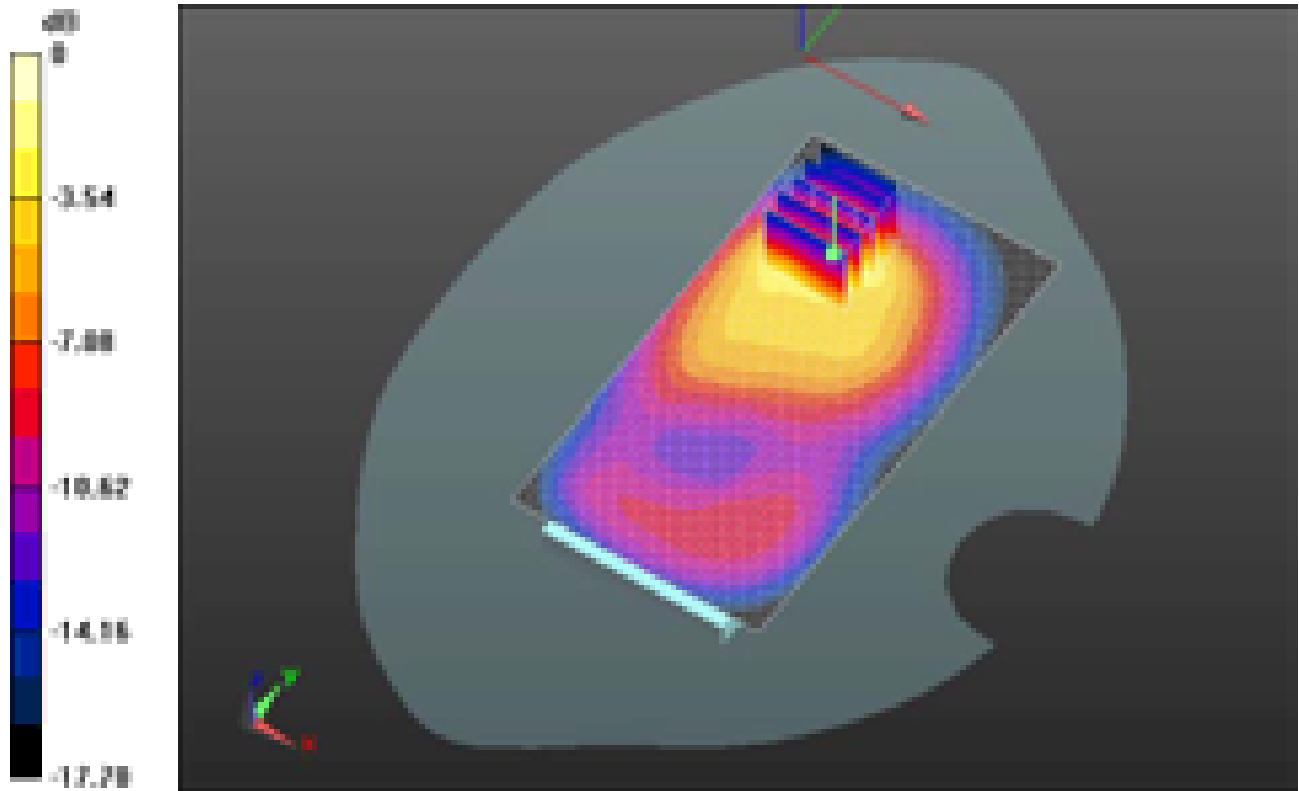

0 dB = 1.410mW/g = 2.98 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>210(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/13/2012 2:53:39 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_GPRS1900\_low\_chan\_amb\_temp\_22.6\_liq\_  
temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: GPRS 1900; Frequency: 1850.2 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.506$  mho/m;  $\epsilon_r = 50.949$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.382 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 13.244 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.7850

**SAR(1 g) = 0.983 mW/g; SAR(10 g) = 0.515 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.197 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>211(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

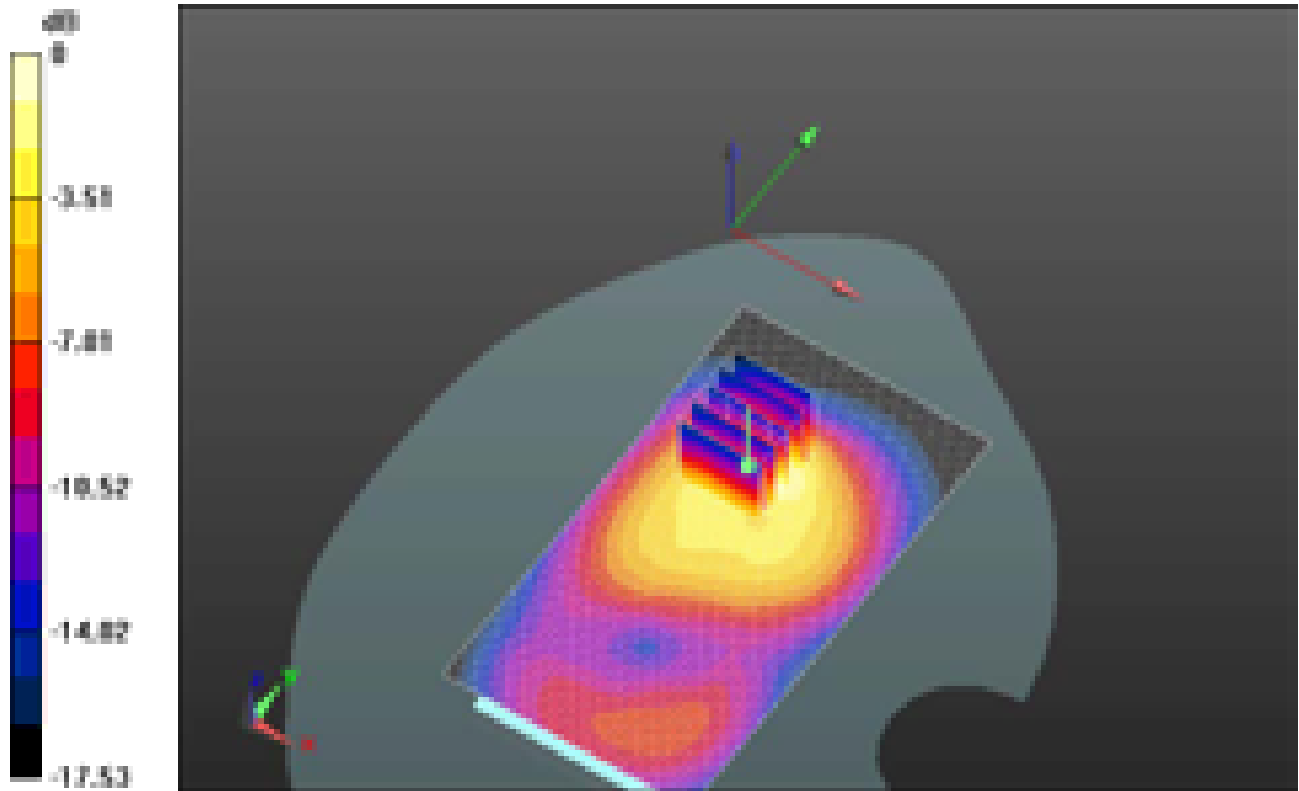

0 dB = 1.200mW/g = 1.58 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>212(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/13/2012 2:35:36 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_GPRS1900\_mid\_chan\_amb\_temp\_23.1\_liq\_  
temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: GPRS 1900; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 50.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.357 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.975 V/m; Power Drift = -0.22 dB

Peak SAR (extrapolated) = 1.7690


**SAR(1 g) = 0.972 mW/g; SAR(10 g) = 0.500 mW/g**

Maximum value of SAR (measured) = 1.226 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>213(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

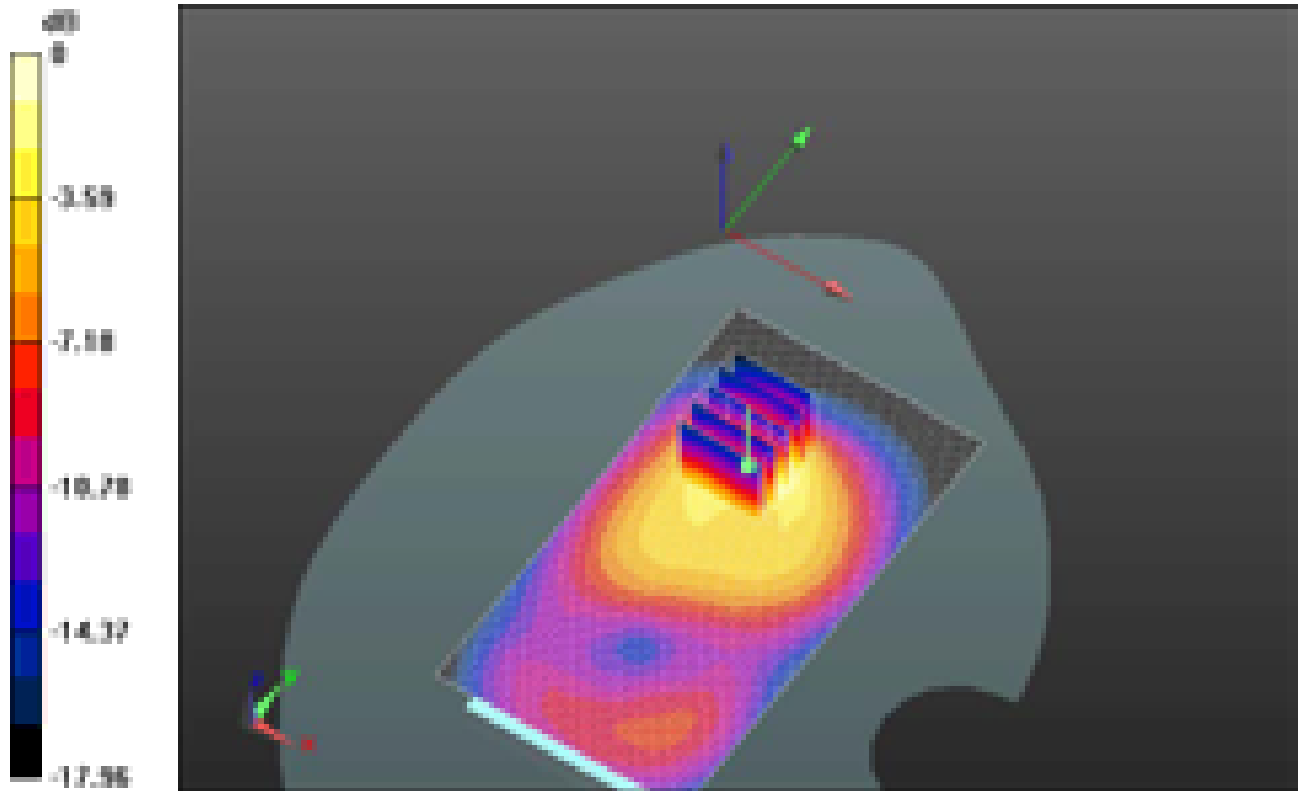

0 dB = 1.230mW/g = 1.80 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>214(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/13/2012 3:11:00 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_GPRS1900\_high\_chan\_amb\_temp\_22.5\_liq  
\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: GPRS 1900; Frequency: 1909.8 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.575$  mho/m;  $\epsilon_r = 50.701$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.413 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.278 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.9730


**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.517 mW/g**

Maximum value of SAR (measured) = 1.297 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>215(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

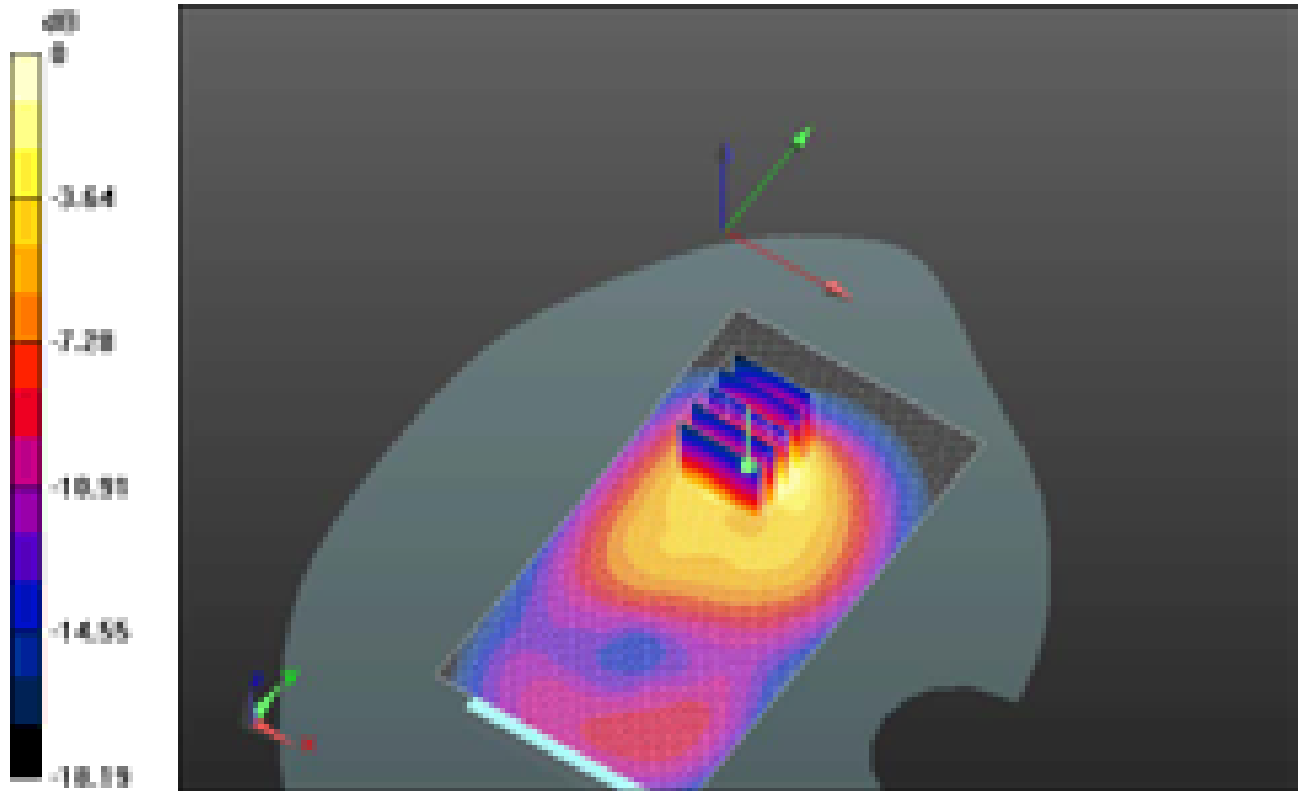

0 dB = 1.300mW/g = 2.28 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>216(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/13/2012 4:06:00 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_GPRS1900\_mid\_chan\_amb\_temp\_22.5\_liq\_  
temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: GPRS 1900; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 50.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.487 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 8.903 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.6960

**SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.250 mW/g**


Maximum value of SAR (measured) = 0.521 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>217(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

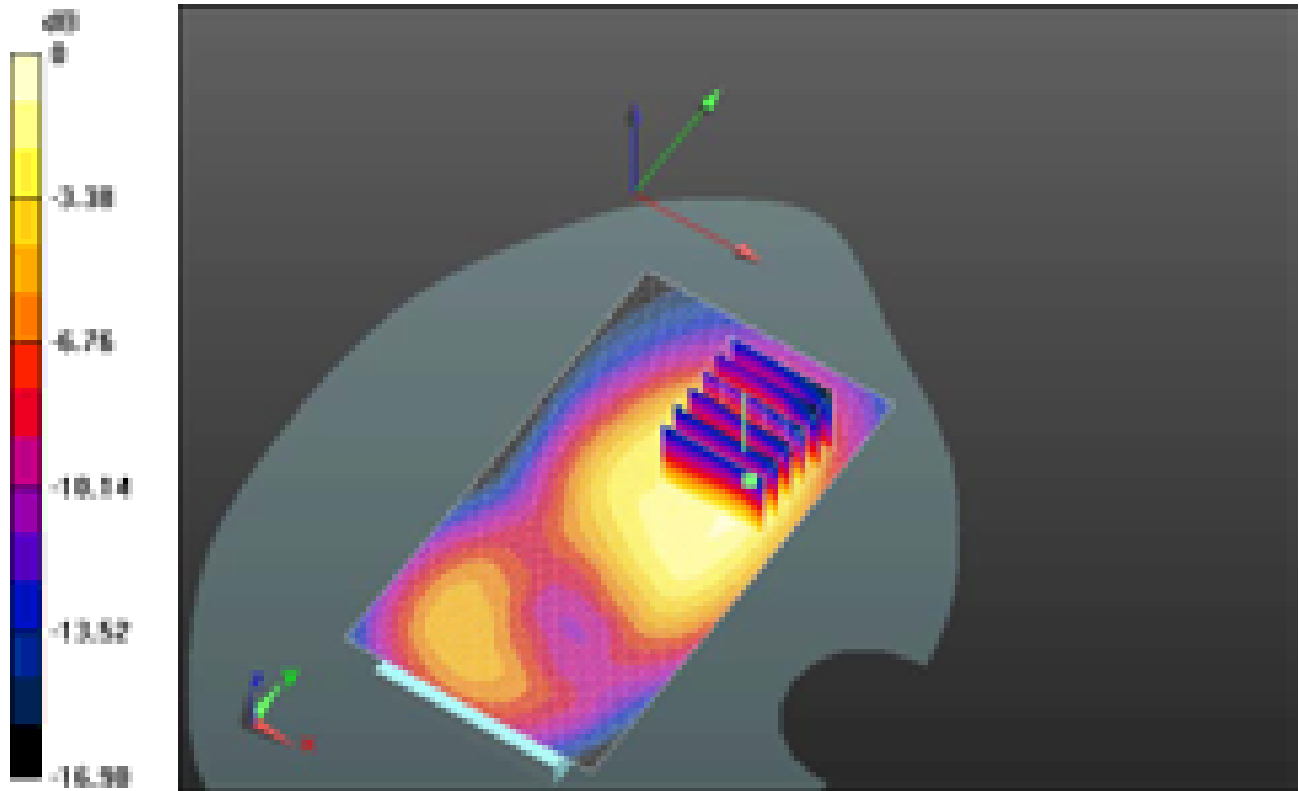

0 dB = 0.520mW/g = -5.68 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>218(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/13/2012 6:02:03 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_GPRS1900\_mid\_chan\_amb\_temp\_22.5C\_liq  
\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: GPRS 1900; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 50.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.277 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 10.388 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.4010


**SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.129 mW/g**

Maximum value of SAR (measured) = 0.294 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>219(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

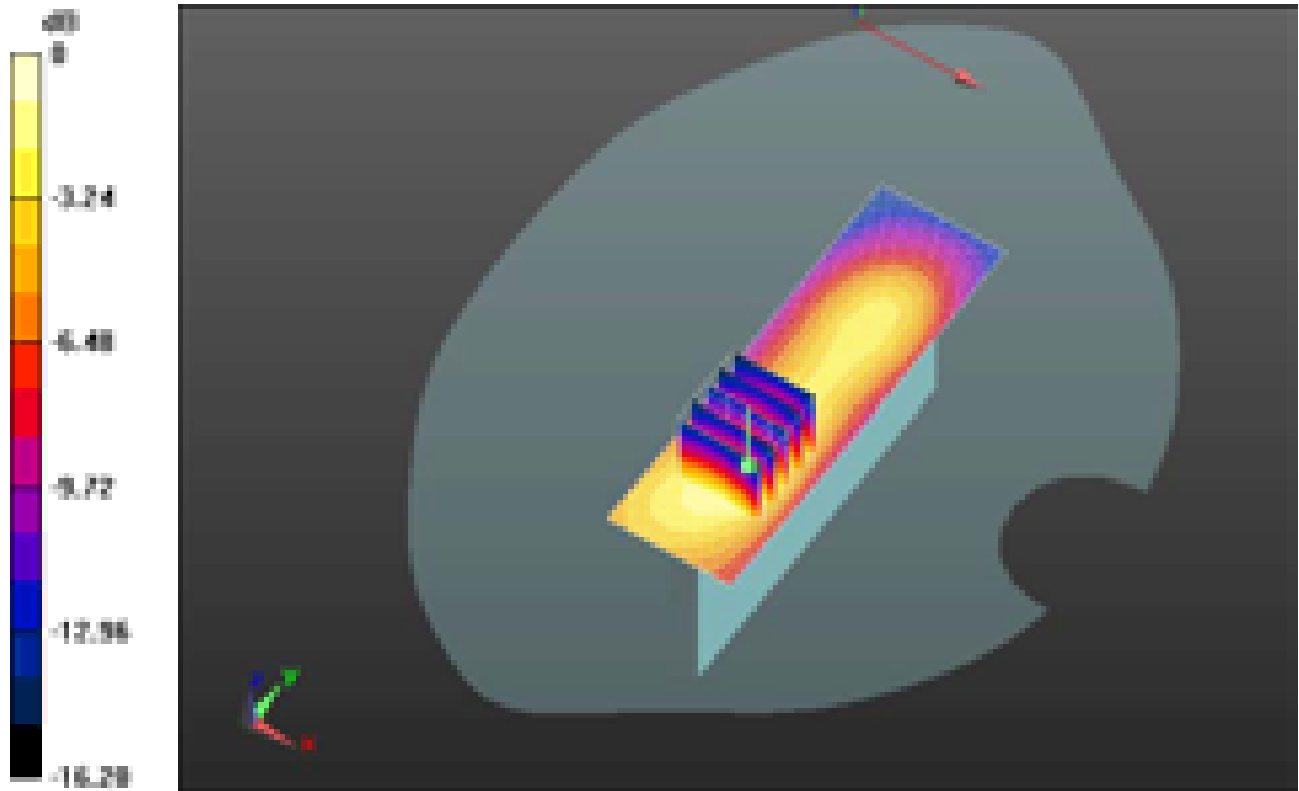

0 dB = 0.290mW/g = -10.75 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>220(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/13/2012 6:16:04 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_GPRS1900\_mid\_chan\_amb\_temp\_22.7C\_li  
q\_temp\_21.5C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: GPRS 1900; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 50.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.125 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 7.116 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.1640


**SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.059 mW/g**

Maximum value of SAR (measured) = 0.122 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>221(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

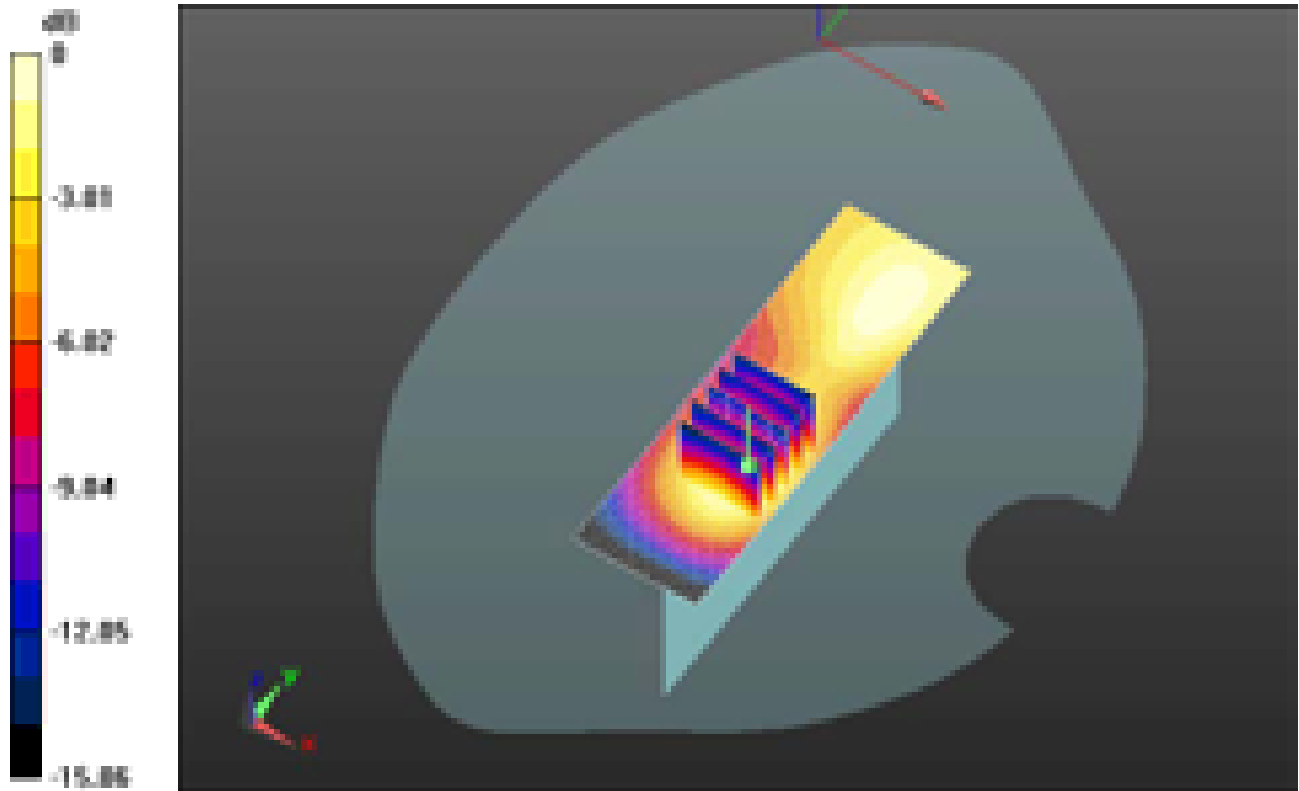

0 dB = 0.120mW/g = -18.42 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>222(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/13/2012 5:45:42 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_GPRS1900\_mid\_chan\_amb\_temp\_22.5\_li  
q\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: GPRS 1900; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 50.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.731 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 21.915 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.0510


**SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.326 mW/g**

Maximum value of SAR (measured) = 0.756 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>223(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

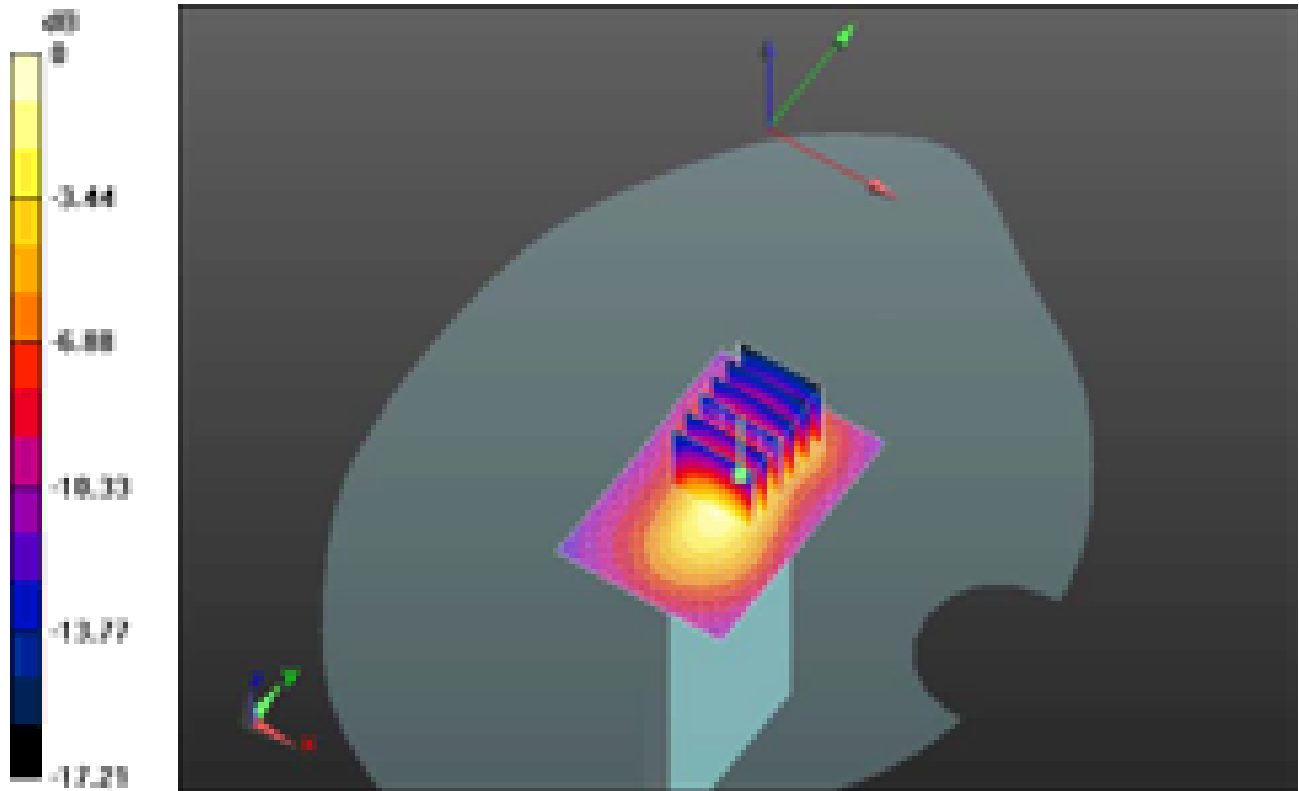

0 dB = 0.760mW/g = -2.38 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>224(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/13/2012 3:29:37 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_Headset\_GPRS1900\_high\_chan\_amb\_temp  
 \_22.5\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: GPRS 1900; Frequency: 1909.8 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.575$  mho/m;  $\epsilon_r = 50.701$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.394 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 12.355 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.9260

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.508 mW/g**


Maximum value of SAR (measured) = 1.274 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>225(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

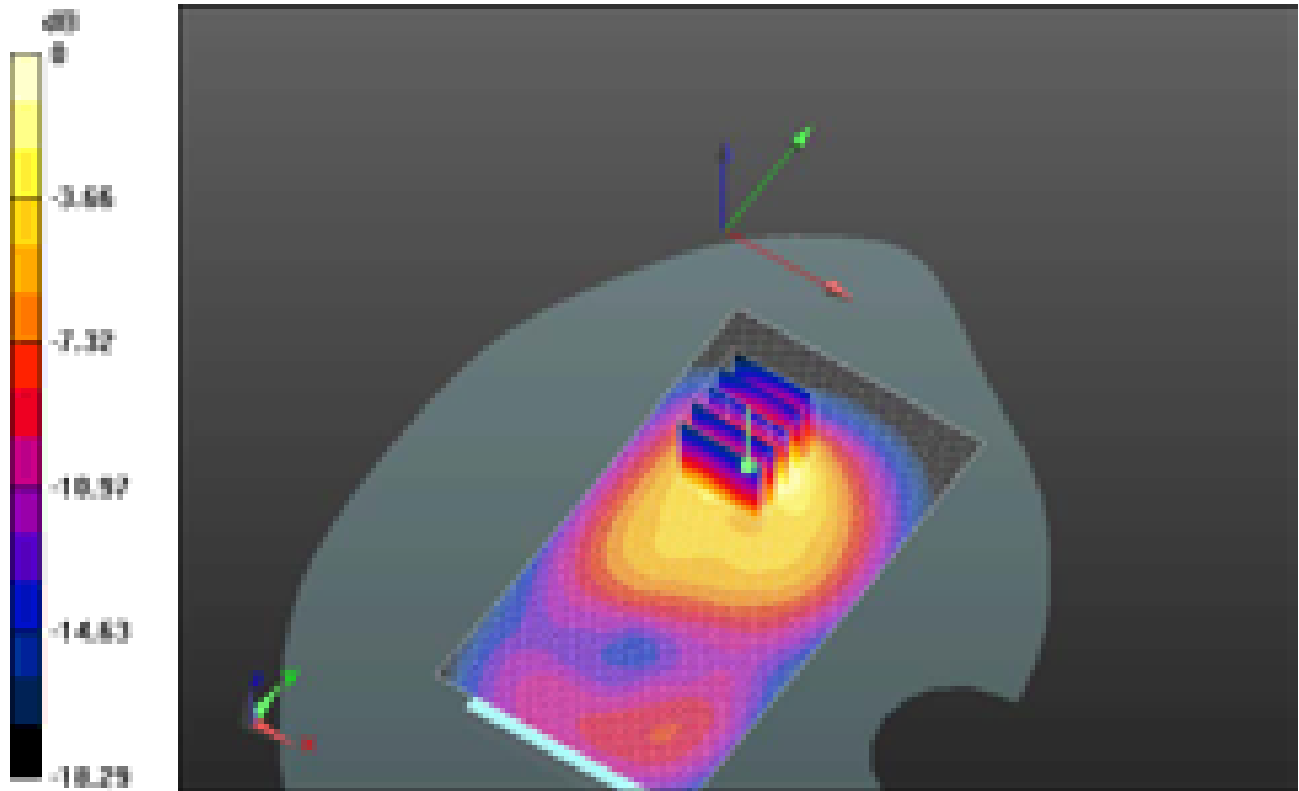

0 dB = 1.270mW/g = 2.08 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>226(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/13/2012 4:28:16 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_GPRS1900\_3slots\_high\_chan\_amb\_temp\_2  
2.5\_liq\_temp\_21.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: GPRS 1900 (3-slots); Frequency: 1909.8 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.575$  mho/m;  $\epsilon_r = 50.701$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.896 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 9.860 V/m; Power Drift = 0.0067 dB

Peak SAR (extrapolated) = 1.3220


**SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.374 mW/g**

Maximum value of SAR (measured) = 0.922 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>227(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

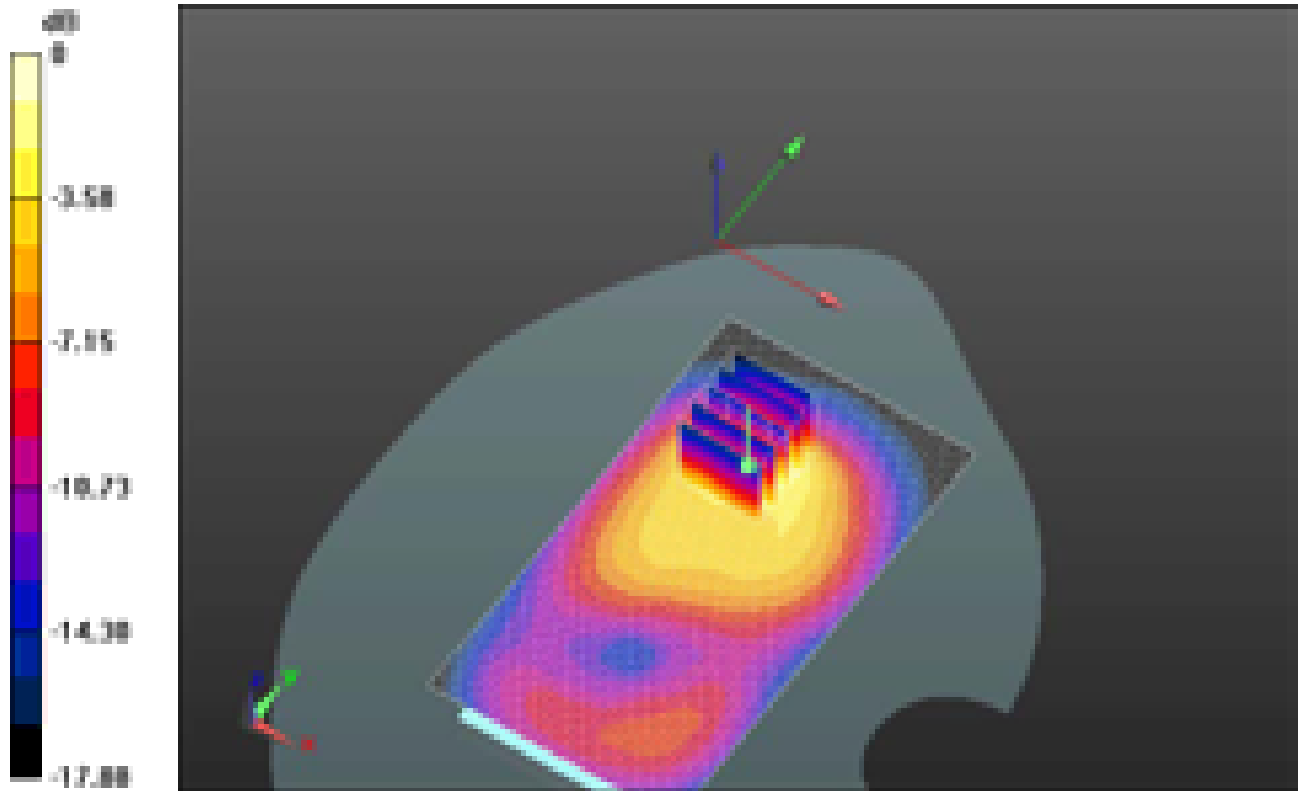

0 dB = 0.920mW/g = -0.72 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>228(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/13/2012 4:44:24 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_GPRS1900\_4-slots\_high\_chan\_amb\_temp\_22.5\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: GPRS 1900 (4-slots); Frequency: 1909.8 MHz  
 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.575$  mho/m;  $\epsilon_r = 50.701$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.027 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 10.680 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.5280


**SAR(1 g) = 0.836 mW/g; SAR(10 g) = 0.429 mW/g**

Maximum value of SAR (measured) = 1.043 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>229(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

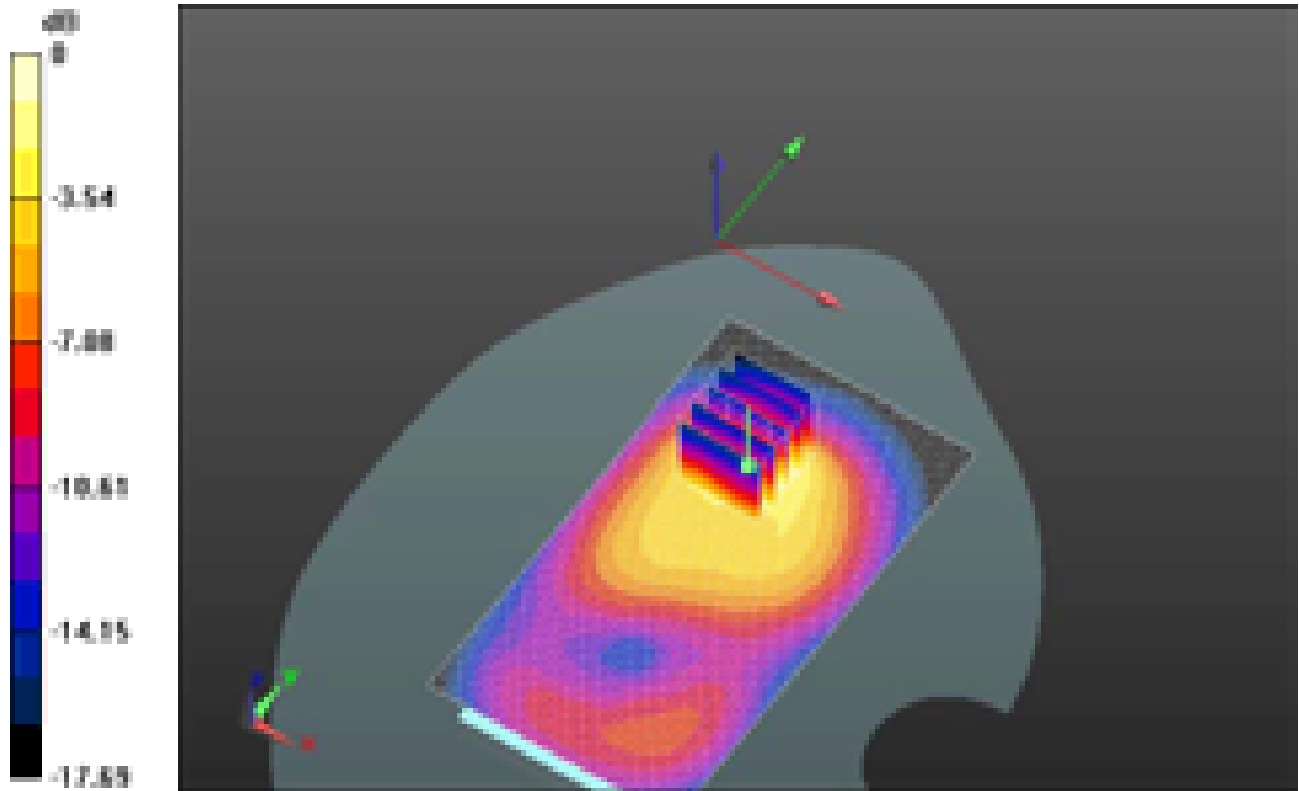

0 dB = 1.040mW/g = 0.34 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>230(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>

Date/Time: 9/28/2012 12:28:09 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_GPRS1900\_high\_chan\_amb\_temp\_23.8\_liq  
\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: GPRS 1900; Frequency: 1909.8 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.593$  mho/m;  $\epsilon_r = 50.906$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.504 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 8.737 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.0890


**SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.576 mW/g**

Maximum value of SAR (measured) = 1.490 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>231(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

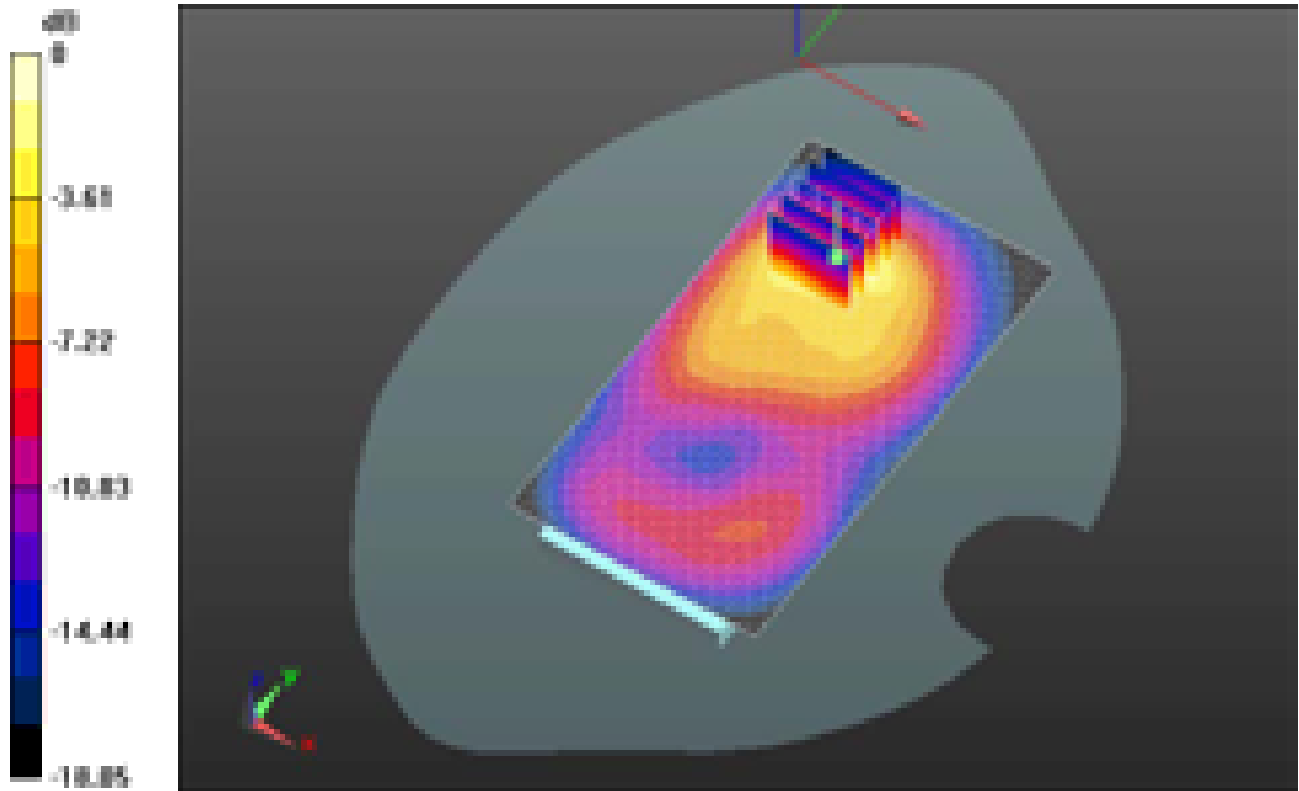

0 dB = 1.490mW/g = 3.46 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>232(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/12/2012 4:12:03 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_II\_low\_chan\_amb\_temp\_22.6\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz  
 Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r = 50.891$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.846 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
 Reference Value = 16.704 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 2.5050  
**SAR(1 g) = 1.37 mW/g; SAR(10 g) = 0.714 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.778 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>233(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

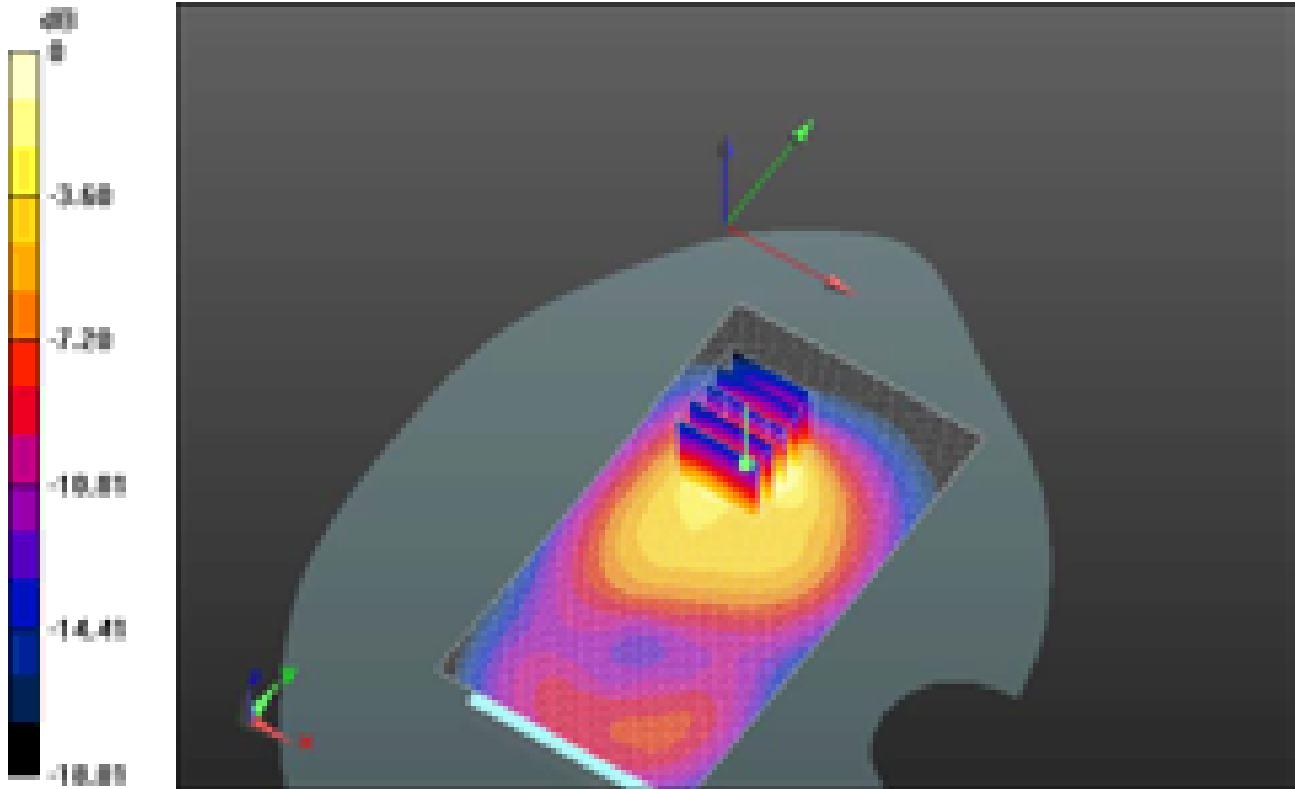

0 dB = 1.780mW/g = 5.01 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>234(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/12/2012 3:52:25 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_II\_mid\_chan\_amb\_temp\_22.3  
\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.726 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 15.347 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.3320


**SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.656 mW/g**

Maximum value of SAR (measured) = 1.622 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>235(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

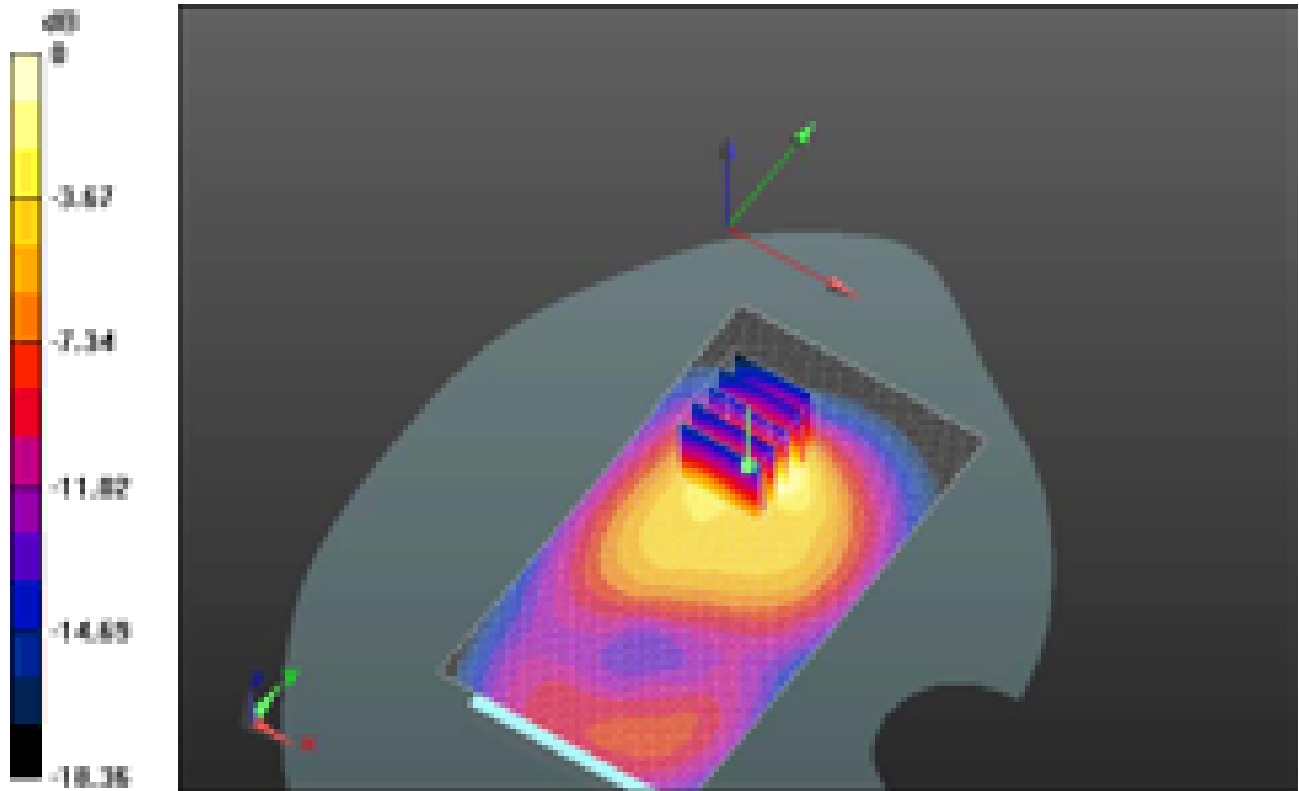

0 dB = 1.620mW/g = 4.19 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>236(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/12/2012 4:29:21 AM

Test Laboratory: RIM Testing Services

## MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_II\_high\_chan\_amb\_temp\_22.3 \_liq\_temp\_21.4C

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz  
 Medium parameters used (interpolated):  $f = 1907.6$  MHz;  $\sigma = 1.556$  mho/m;  $\epsilon_r = 50.725$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.848 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
 Reference Value = 15.153 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 2.6740  
**SAR(1 g) = 1.43 mW/g; SAR(10 g) = 0.712 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.838 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>237(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

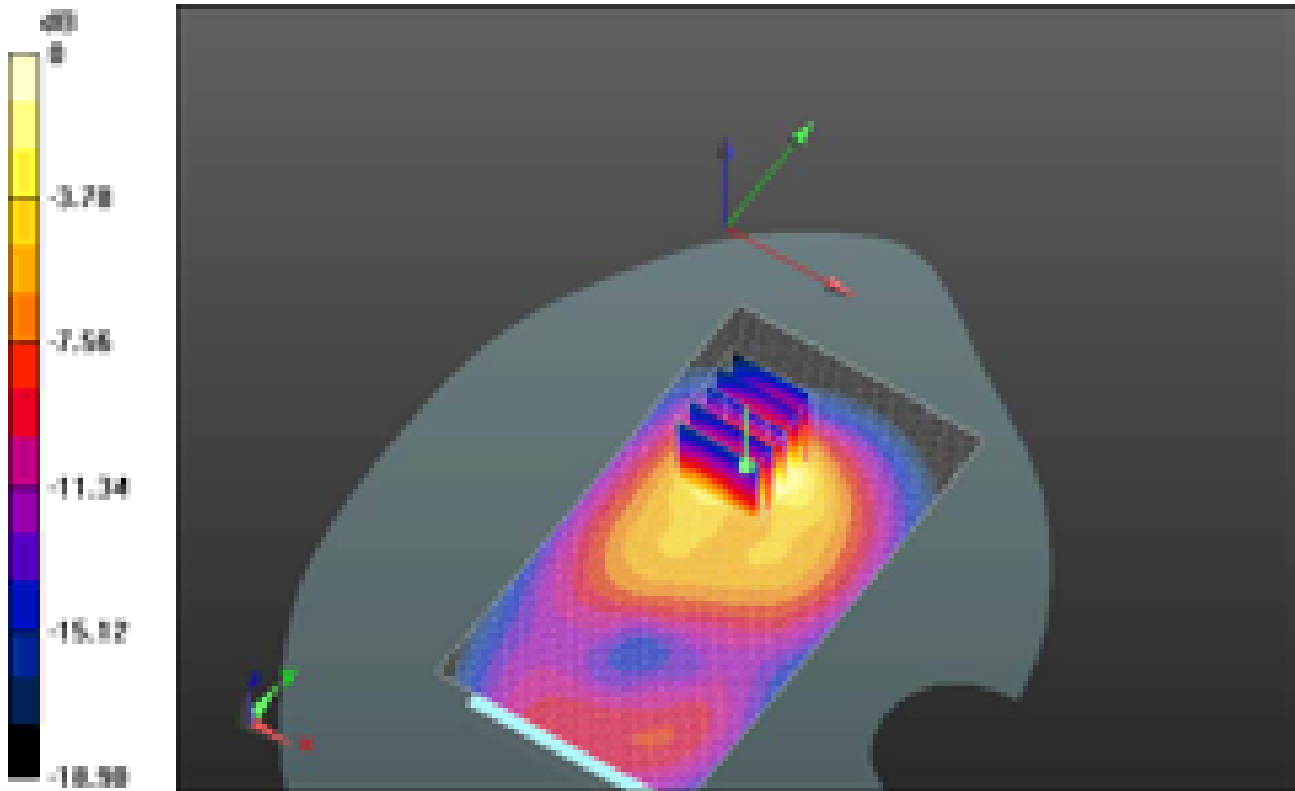

0 dB = 1.840mW/g = 5.30 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>238(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/12/2012 7:08:06 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_UMTS\_Band\_II\_mid\_chan\_amb\_temp\_22.9C  
\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.443 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 13.053 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.6740


**SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.210 mW/g**

Maximum value of SAR (measured) = 0.493 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>239(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

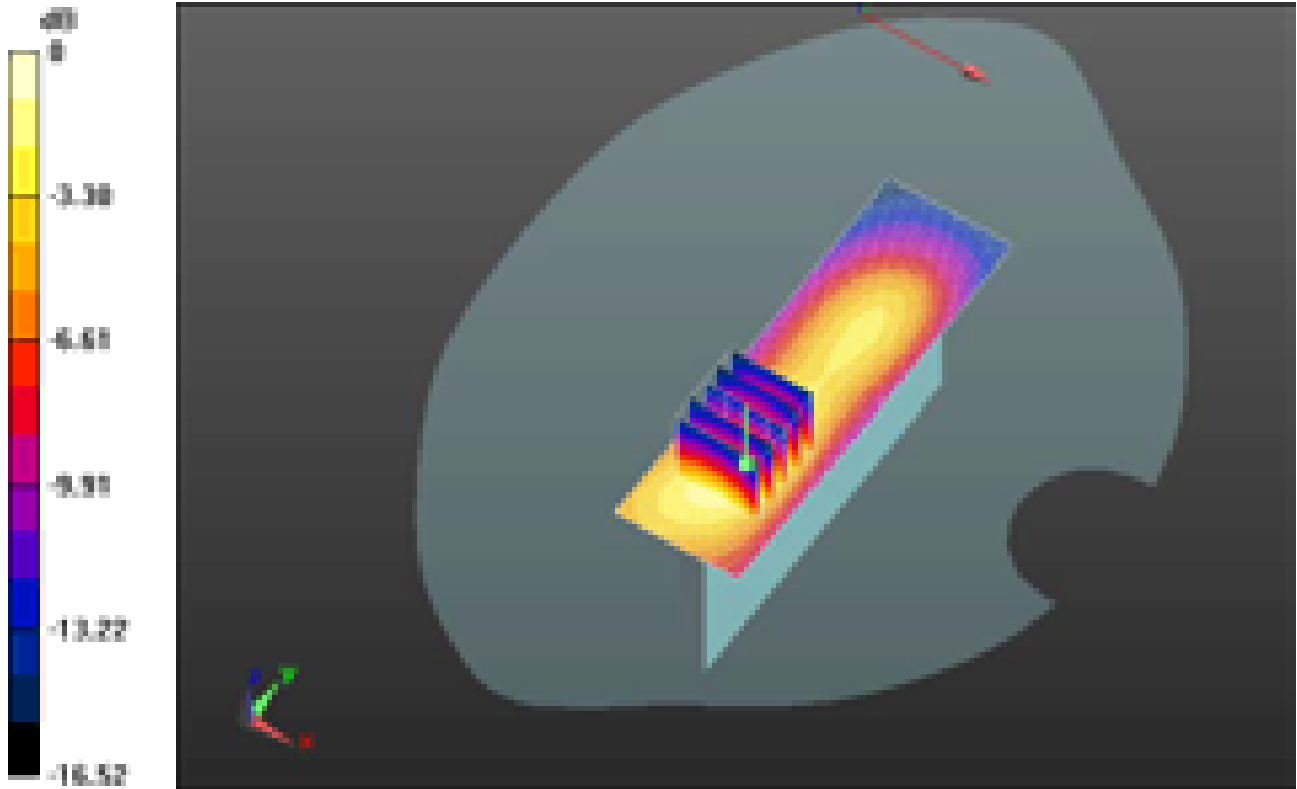

0 dB = 0.490mW/g = -6.20 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>240(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/12/2012 7:29:30 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_UMTS\_Band\_II\_mid\_chan\_amb\_temp\_22.5  
C\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A20270D**

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.186 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 9.420 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.2430

**SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.088 mW/g**


Maximum value of SAR (measured) = 0.183 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>241(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

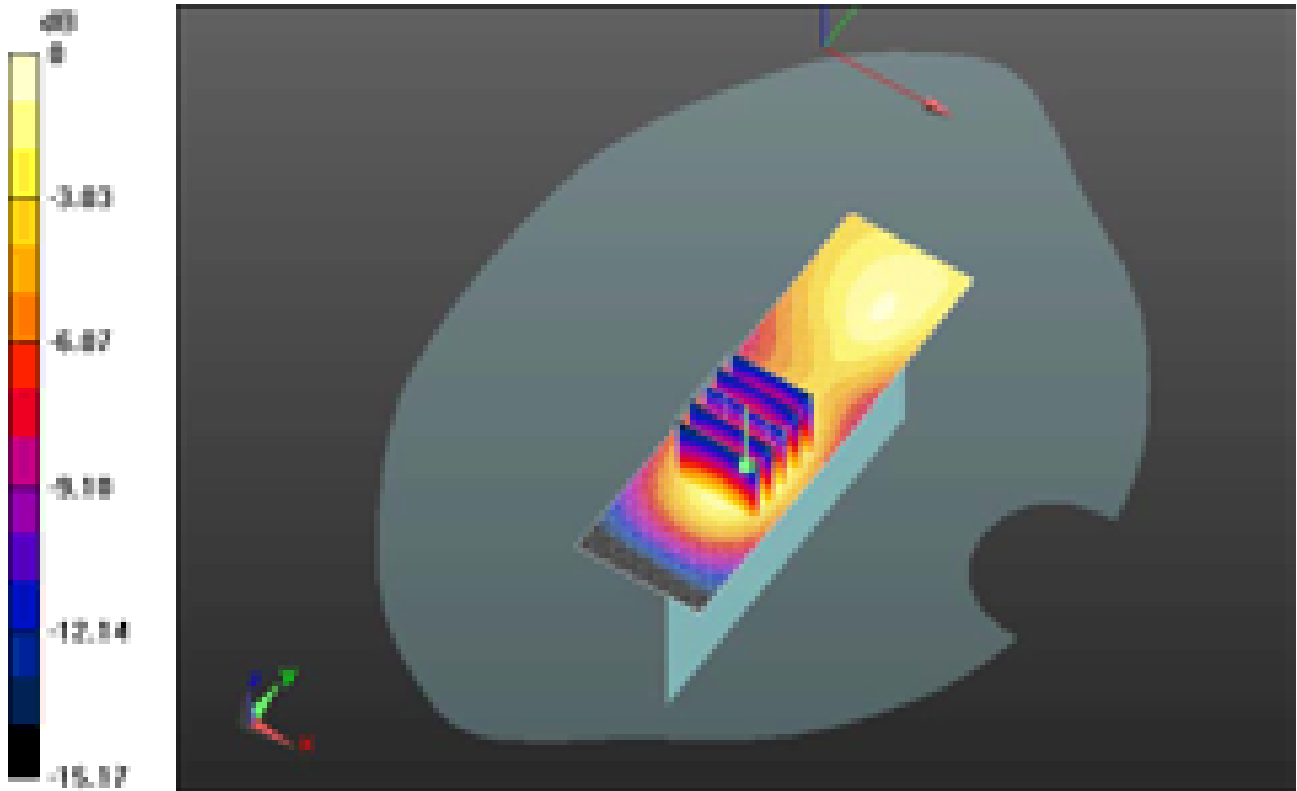

0 dB = 0.180mW/g = -14.89 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>242(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/12/2012 6:52:41 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Bottom\_UMTS\_Band\_II\_mid\_chan\_amb\_temp\_22.  
2\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.523$  mho/m;  $\epsilon_r = 50.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.783 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x6x7)/Cube 0:**


Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 23.384 V/m; Power Drift = -0.0062 dB

Peak SAR (extrapolated) = 1.0780


**SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.357 mW/g**

Maximum value of SAR (measured) = 0.794 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>243(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

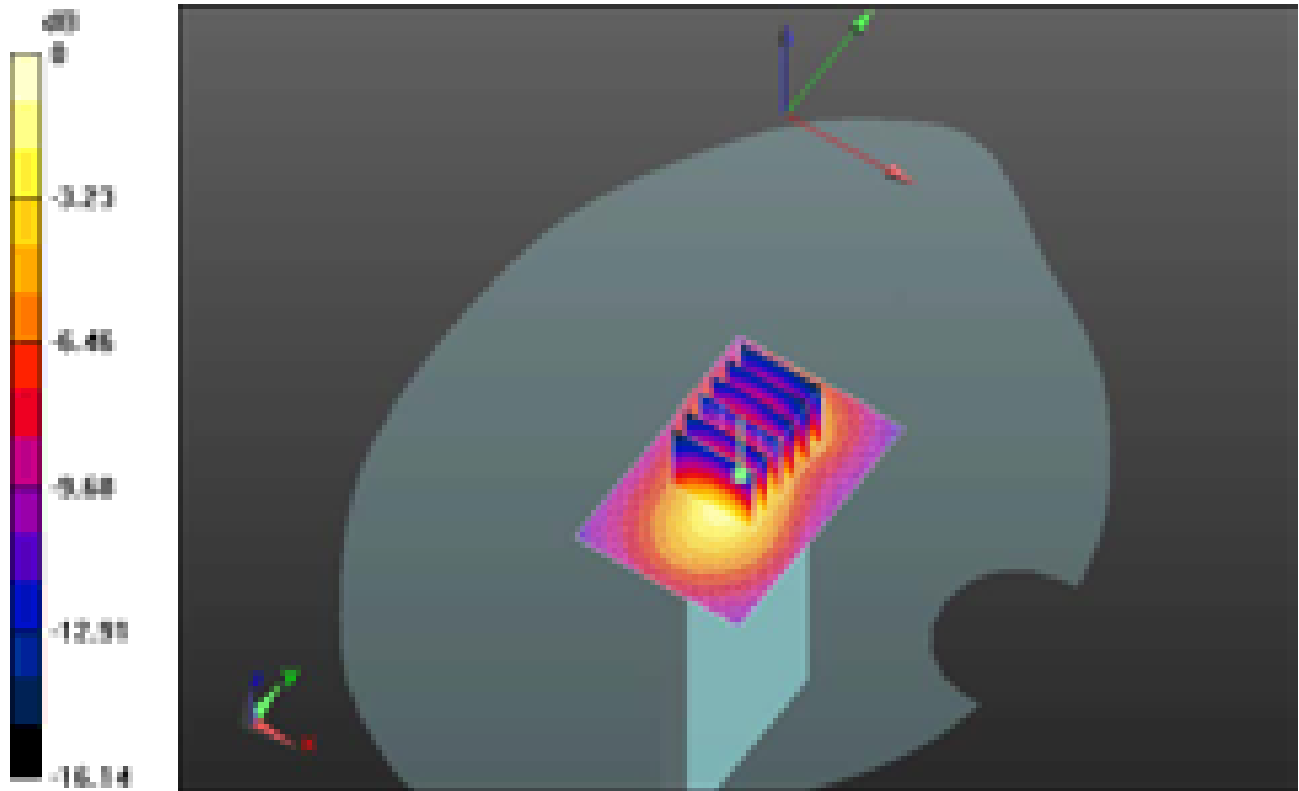

0 dB = 0.790mW/g = -2.05 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>244(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>

Date/Time: 6/12/2012 7:49:42 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_Headset\_UMTS\_Band\_II\_mid\_chan\_amb\_tem  
p\_22.4\_liq\_temp\_21.4C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A20270D**

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz  
 Medium parameters used (interpolated):  $f = 1907.6$  MHz;  $\sigma = 1.556$  mho/m;  $\epsilon_r = 50.725$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.838 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
 Reference Value = 14.294 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 2.4900  
**SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.690 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.733 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>245(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

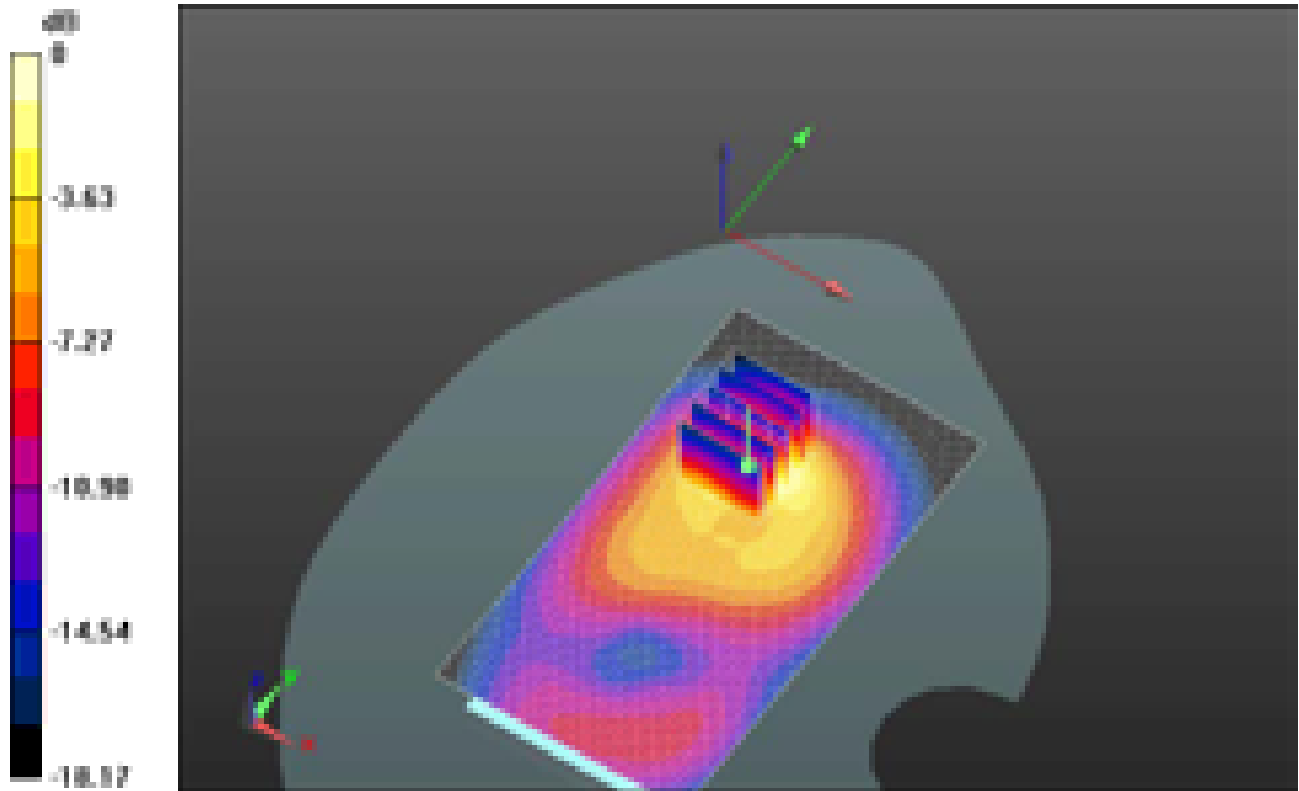

0 dB = 1.730mW/g = 4.76 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>246(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 10/23/2012 10:03:20 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_UMTS\_Band\_II\_high\_chan\_amb\_temp\_23.8  
\_liq\_temp\_22.9C\_T3**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A8C7018**

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz  
Medium parameters used (interpolated):  $f = 1907.6$  MHz;  $\sigma = 1.517$  mho/m;  $\epsilon_r = 51.569$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x111x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 1.783 mW/g


**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm  
Reference Value = 9.360 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 2.4090  
**SAR(1 g) = 1.34 mW/g; SAR(10 g) = 0.692 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.712 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>247(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

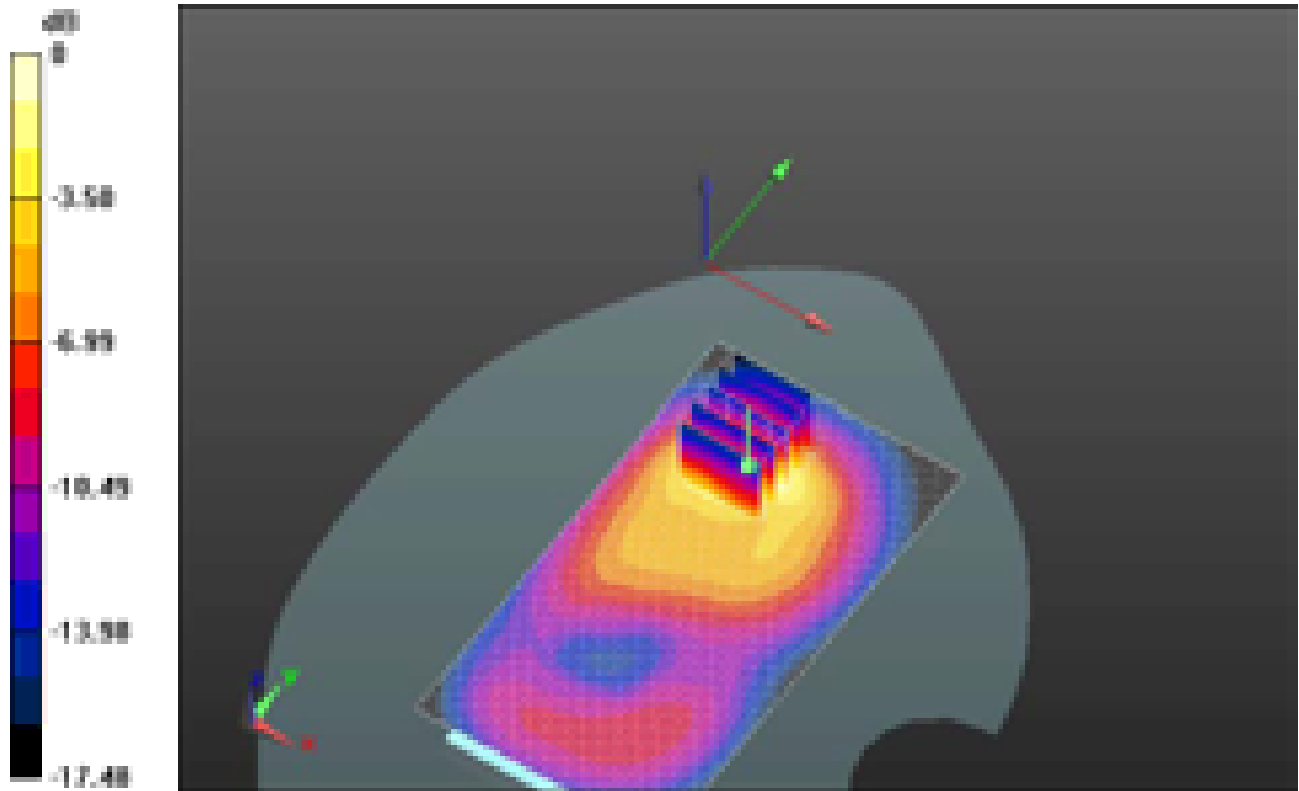

0 dB = 1.710mW/g = 4.66 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>248(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/20/2012 9:47:38 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_802.11b\_mid\_chan\_amb\_temp\_23.6\_liq\_t  
 mp\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.899$  mho/m;  $\epsilon_r = 52.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.503 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 3.974 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.0740


**SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.204 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.620 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>249(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

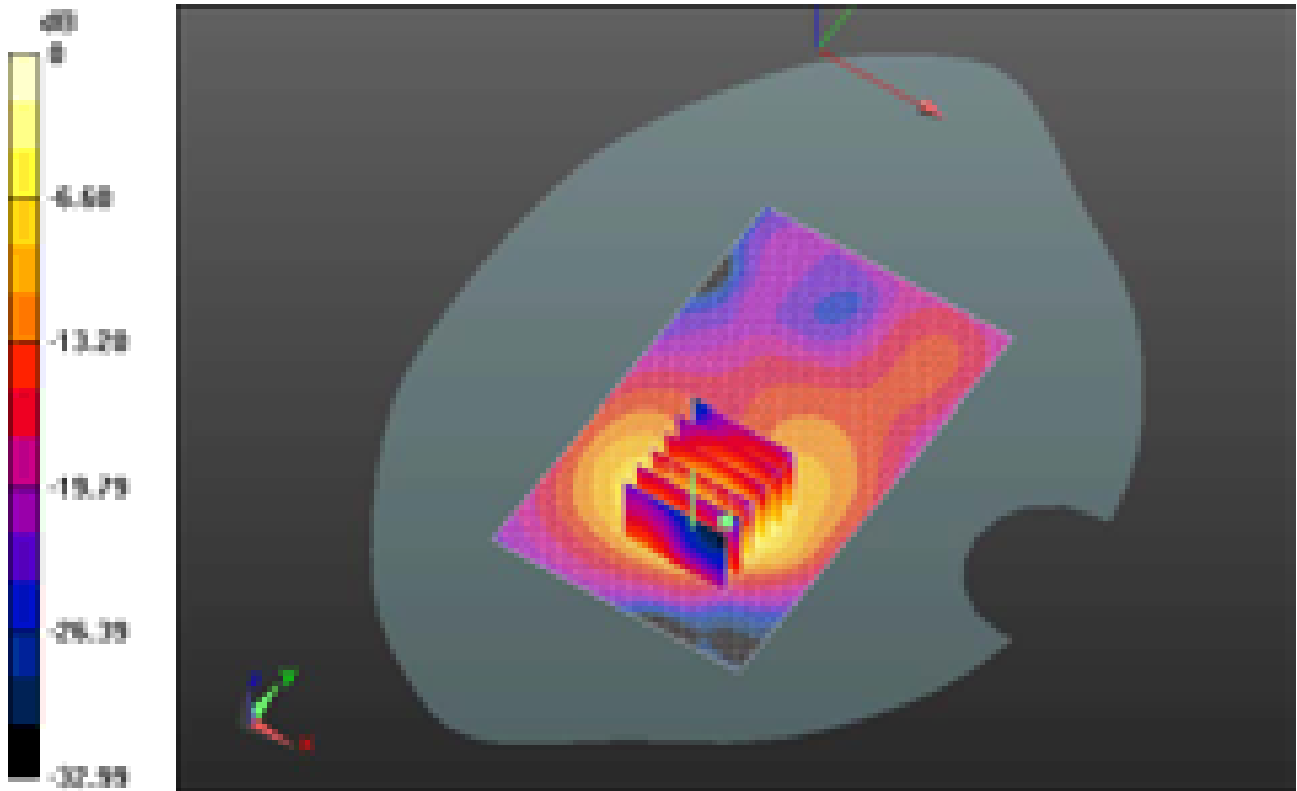

0 dB = 0.620mW/g = -4.15 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>250(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/20/2012 10:55:04 PM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Front\_802.11b\_mid\_chan\_amb\_temp\_22.9\_liq\_tem  
p\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.899$  mho/m;  $\epsilon_r = 52.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.087 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 3.296 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.1330

**SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.035 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.087 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>251(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

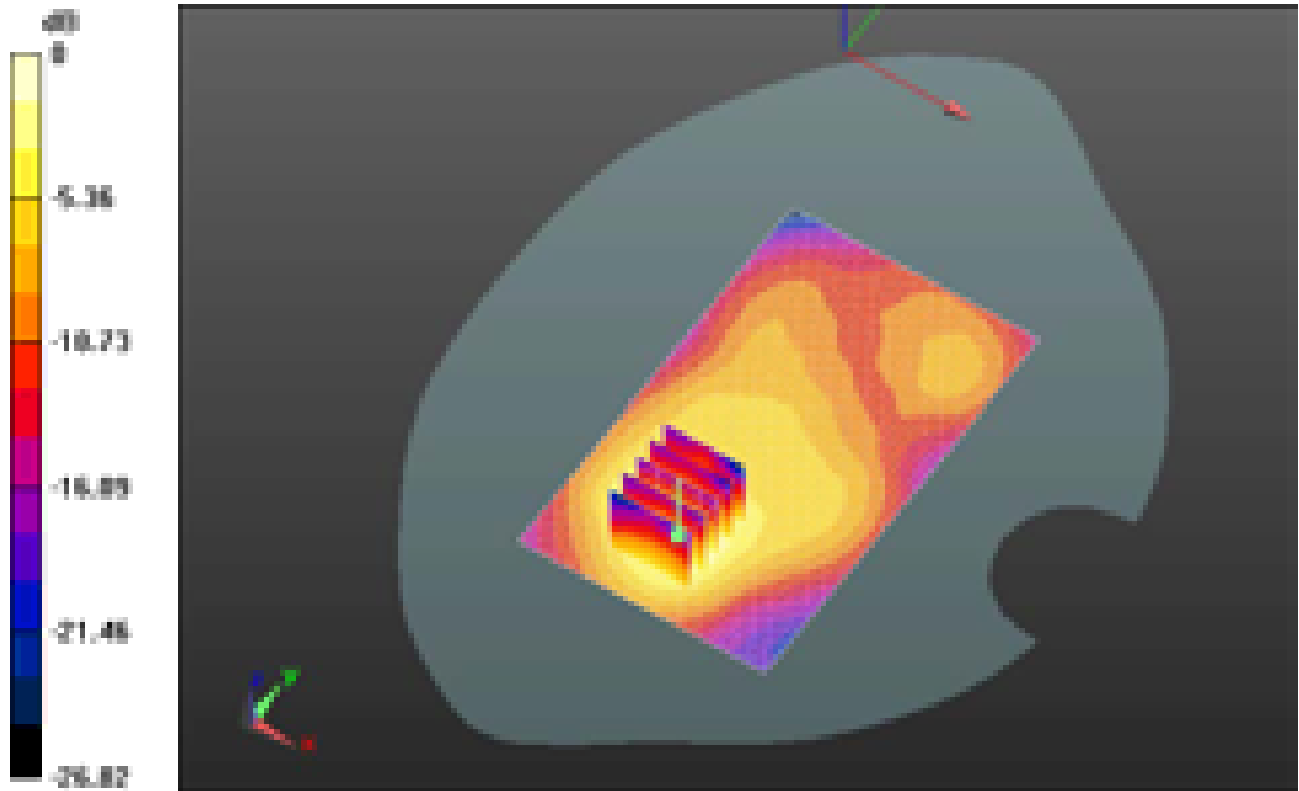

0 dB = 0.090mW/g = -20.92 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>252(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/21/2012 1:27:22 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Left\_802.11b\_mid\_chan\_amb\_temp\_22.9\_liq\_tem  
p\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.899$  mho/m;  $\epsilon_r = 52.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.023 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 2.021 V/m; Power Drift = 0.36 dB


Peak SAR (extrapolated) = 0.0390

**SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.011 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.025 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>253(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

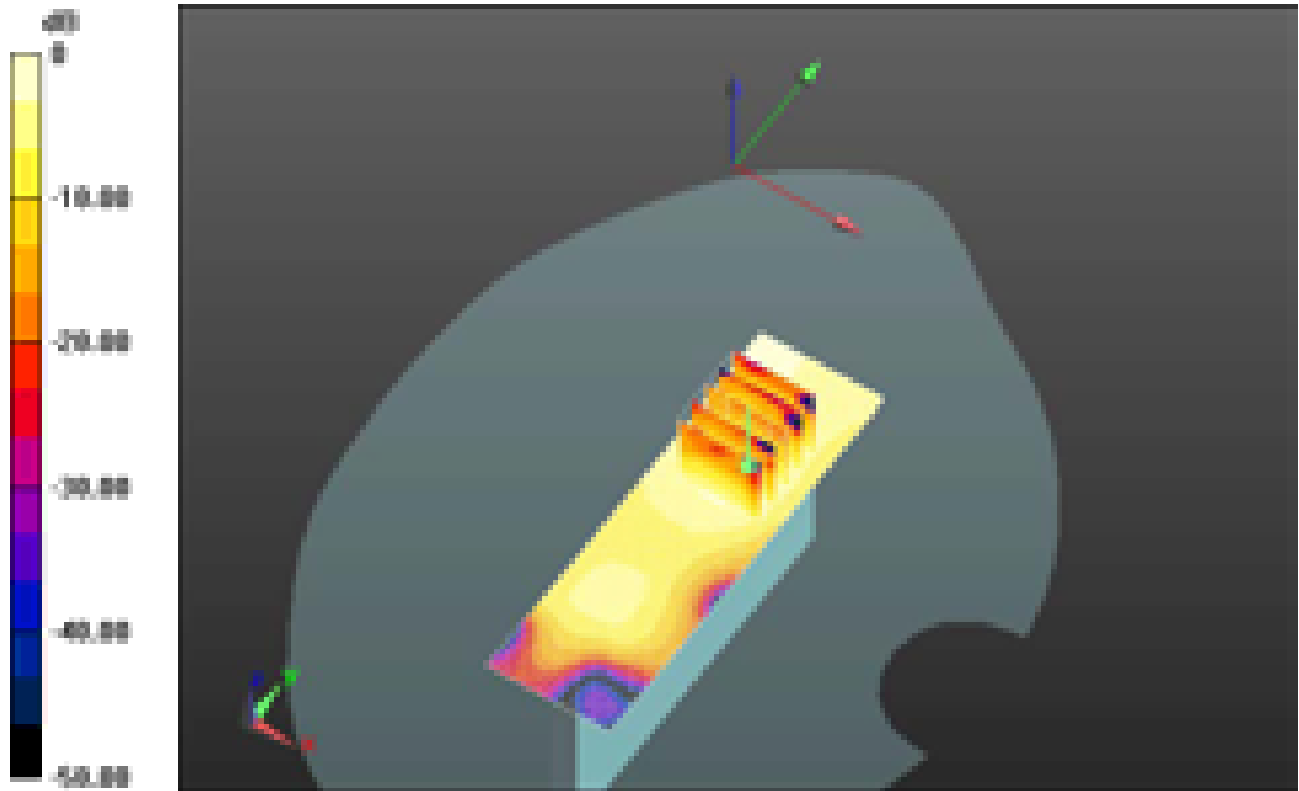

0 dB = 0.030mW/g = -30.46 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,  RFK121LW SAR Report</b>			Page <b>254(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-  35B</b>	FCC ID: <b>L6ARFF90LW  L6ARFK120LW</b>

Date/Time: 6/21/2012 2:07:15 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Right\_802.11b\_mid\_chan\_amb\_temp\_22.4\_liq\_tem  
p\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample; Serial: 2A211C01**

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.899$  mho/m;  $\epsilon_r = 52.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (31x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.026 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 2.689 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.0380

**SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.012 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.025 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>255(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

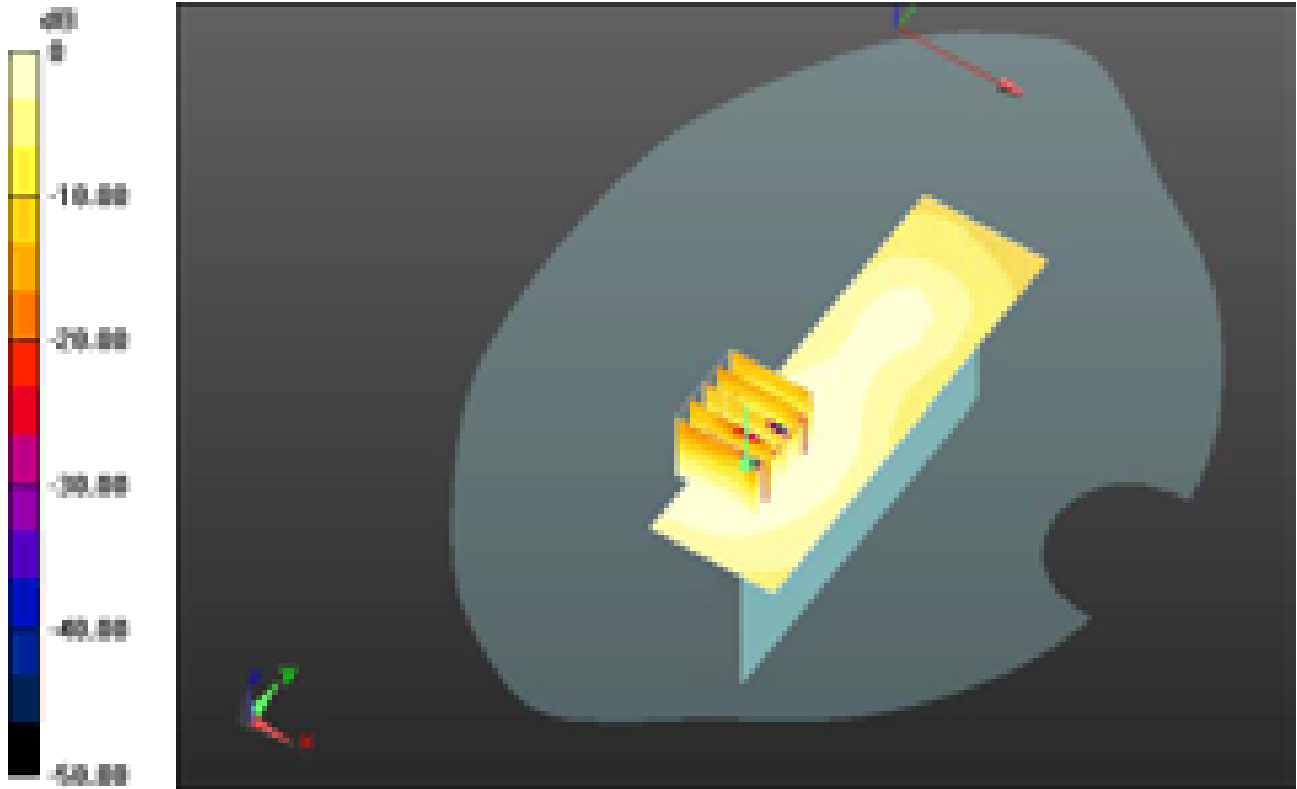

0 dB = 0.020mW/g = -33.98 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>256(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 6/21/2012 12:49:38 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Top\_802.11b\_mid\_chan\_amb\_temp\_22.7\_liq\_tem  
p\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.899$  mho/m;  $\epsilon_r = 52.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (41x61x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.095 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 6.424 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.1270


**SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.038 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.085 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>257(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

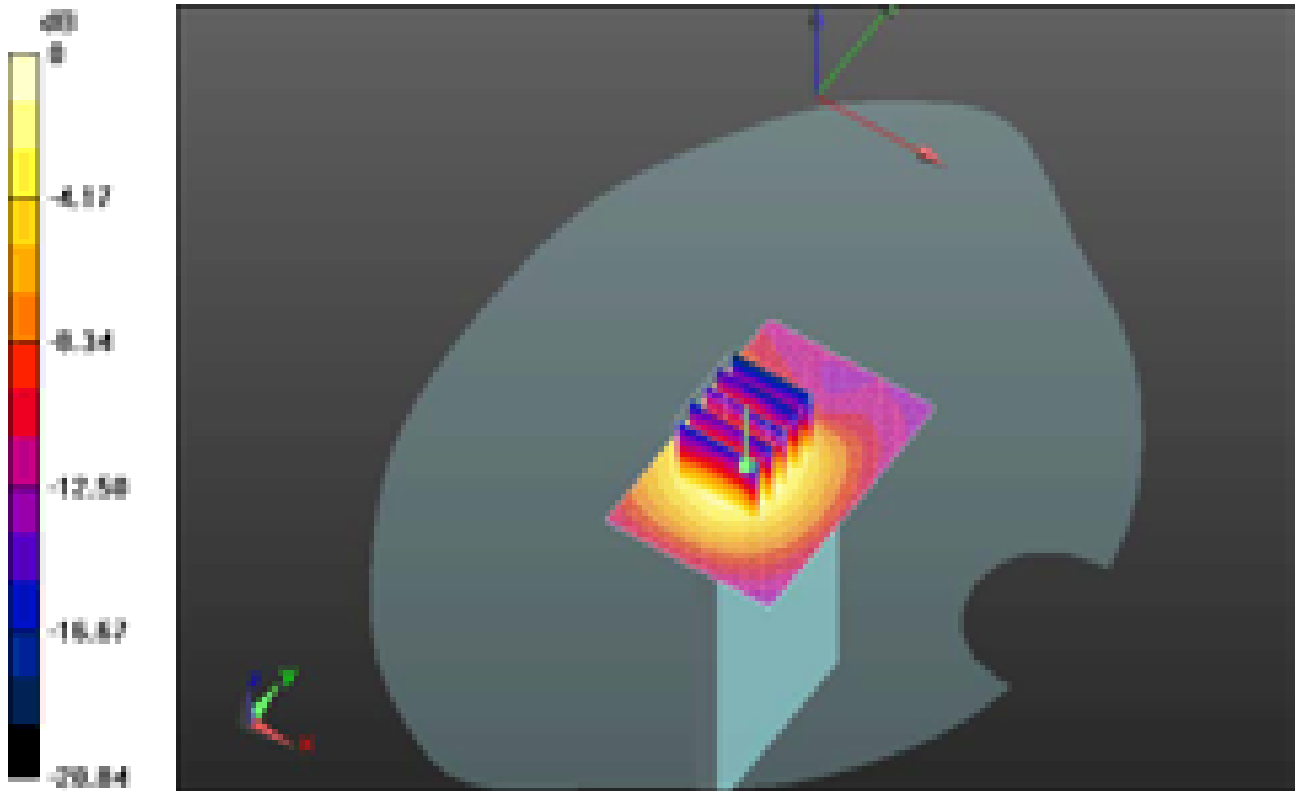

0 dB = 0.090mW/g = -20.92 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>258(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 6/21/2012 2:32:12 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_Headset\_802.11b\_mid\_chan\_amb\_temp\_22.8\_liq\_temp\_22.3C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A211C01**

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.899$  mho/m;  $\epsilon_r = 52.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.406 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 2.709 V/m; Power Drift = 0.21 dB


Peak SAR (extrapolated) = 0.8810

**SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.170 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.514 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>259(266)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW L6ARFK120LW</b>	IC ID <b>2503A-RFF90LW 2503A-RFK120LW</b>

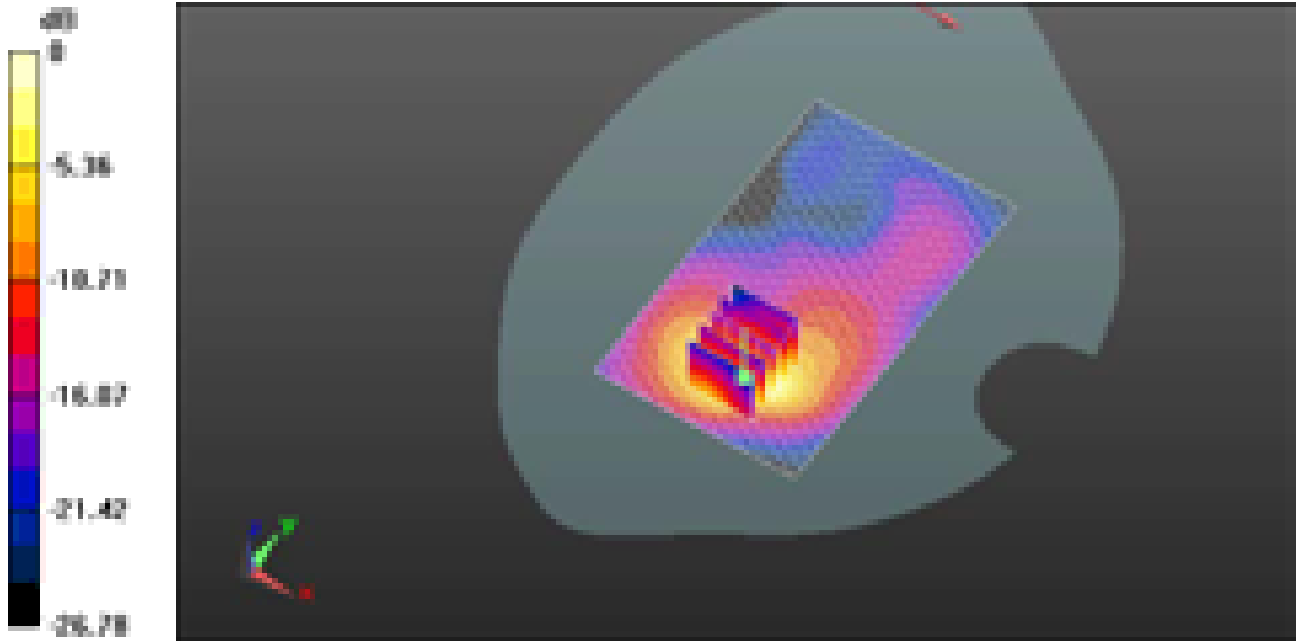

0 dB = 0.510mW/g = -5.85 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>260(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 9/13/2012 11:50:23 PM

Test Laboratory: RIM Testing Services

## MHS\_10mm\_Spacer\_Back\_802.11b\_low\_chan

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: 802.11 b (2450); Frequency: 2412 MHz

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.866$  mho/m;  $\epsilon_r = 52.901$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.774 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 3.922 V/m; Power Drift = 0.0063 dB


Peak SAR (extrapolated) = 1.9630

**SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.325 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.031 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>261(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

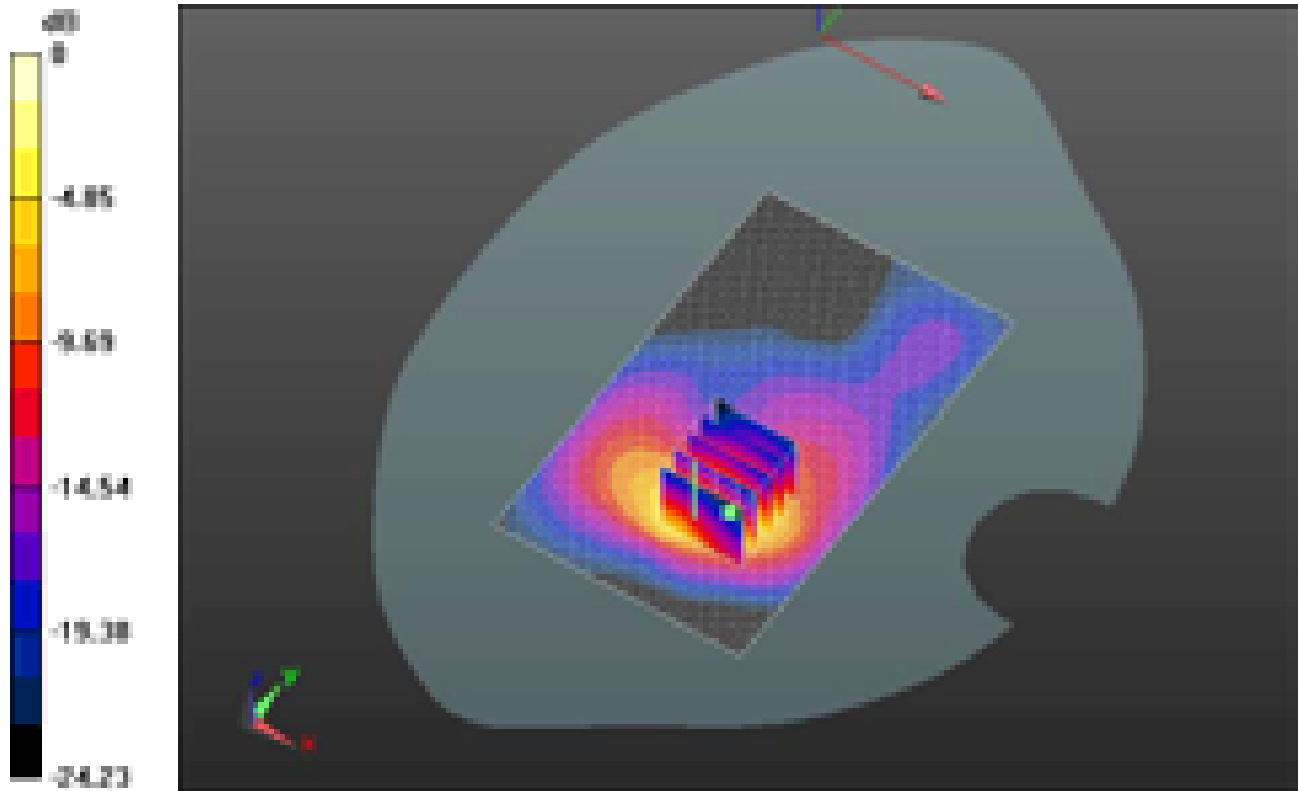

0 dB = 1.030mW/g = 0.26 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>262(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

Date/Time: 9/14/2012 1:00:21 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_802.11b\_mid\_chan\_amb\_temp\_23.8\_liq\_temp\_21.2C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: 802.11 b (2450); Frequency: 2437 MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.896$  mho/m;  $\epsilon_r = 52.825$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x101x1):** Measurement grid:  
 $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.793 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm


Reference Value = 3.695 V/m; Power Drift = 0.26 dB


Peak SAR (extrapolated) = 1.9610

**SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.320 mW/g**


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.000 mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>263(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-          35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

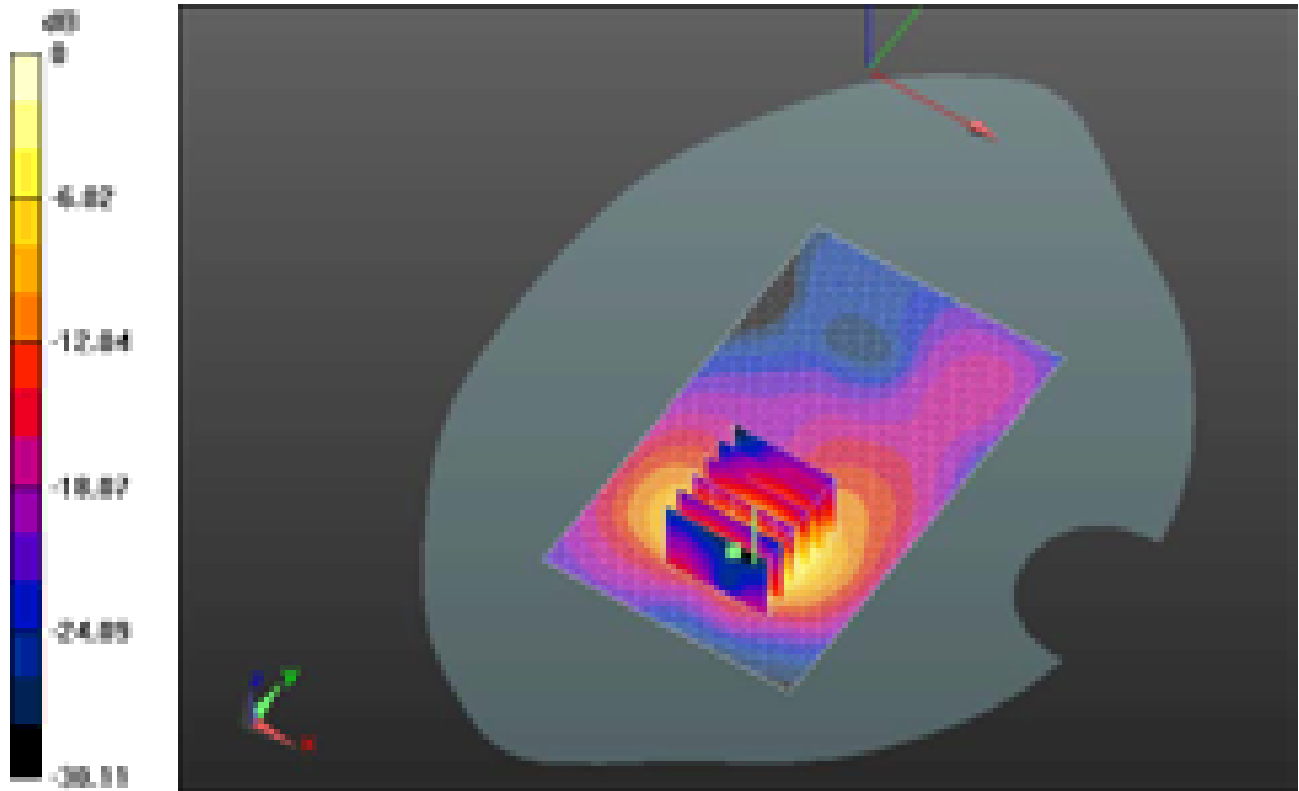

0 dB = 1.000mW/g = 0 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>264(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Date/Time: 9/14/2012 2:10:26 AM

Test Laboratory: RIM Testing Services

**MHS\_10mm\_Spacer\_Back\_802.11b\_high\_chan\_amb\_temp\_23.3\_liq\_temp\_21.1C**

**DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2A8C7018**

Communication System: 802.11 b (2450); Frequency: 2462 MHz

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.926$  mho/m;  $\epsilon_r = 52.718$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.3, 4.3, 4.3); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/Touch position -/Area Scan (61x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.833 mW/g

**Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:**

Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 4.398 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.9040


**SAR(1 g) = 0.803 mW/g; SAR(10 g) = 0.323 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.962 mW/g



	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW,          RFK121LW SAR Report</b>			Page <b>265(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW          L6ARFK120LW</b>

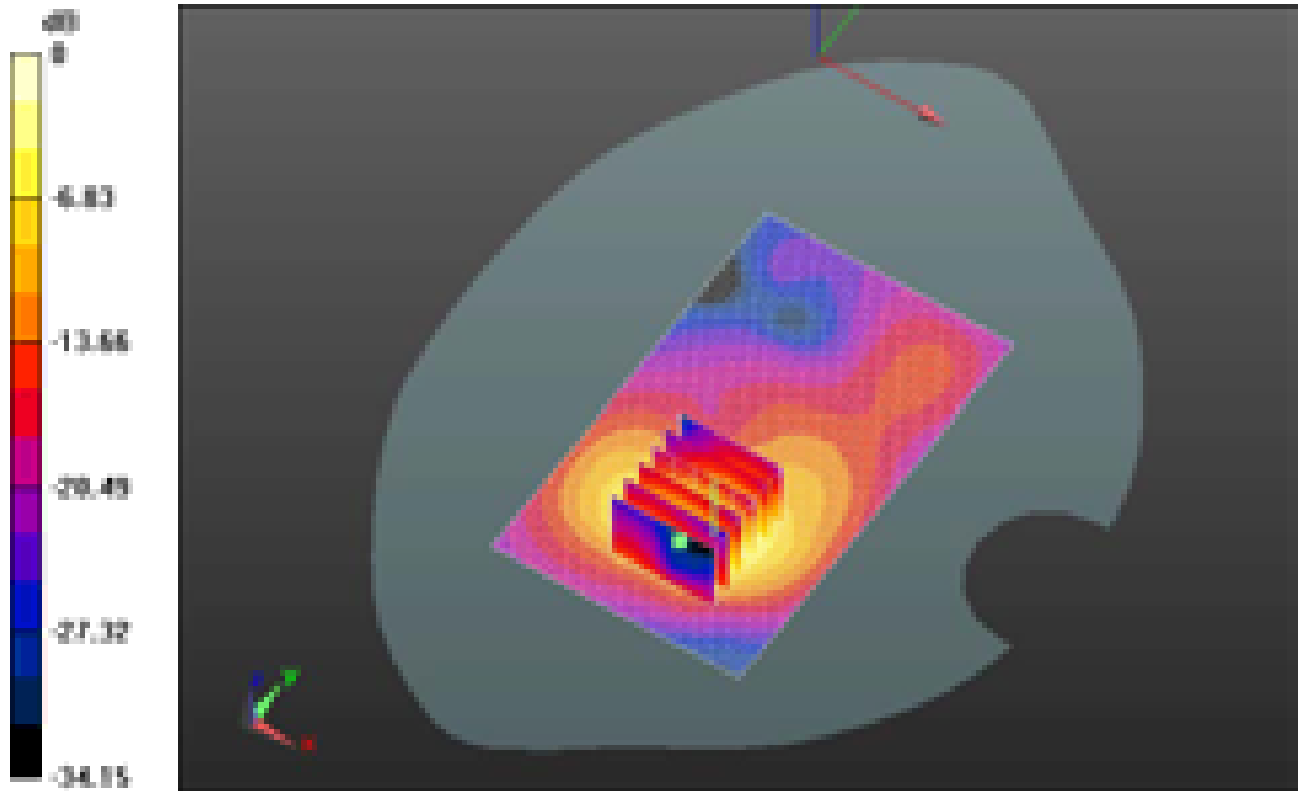

0 dB = 0.960mW/g = -0.35 dB mW/g

	Document <b>Appendix C2 for the BlackBerry® Smartphone Model RFF91LW, RFK121LW SAR Report</b>			Page <b>266(266)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>June 04 – October 29, 2012</b>	Test Report No <b>RTS-6012-1208-35B</b>	FCC ID: <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

**Z axis plot for the worst case body configuration**

