

TEST REPORT

Test report no.: 1-5579/12-01-02-A



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Research In Motion Limited
305 Phillip Street
Waterloo, ON N2L 3W8 / CANADA
Phone: +1 51 98 88 74 65
Fax: +1 51 98 88 69 06
Contact: Masud Attayi
e-mail: mattayi@rim.com
Phone: +1 51 98 88 74 65

Manufacturer

Research In Motion Limited
305 Phillip Street
Waterloo, ON N2L 3W8 / CANADA

Test standard/s

47 CFR Part 22	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services
RSS - 132 Issue 2	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Blackberry GSM Phones
Model name:	RFN81UW
FCC ID:	L6ARFN80UW
IC:	2503A-RFN80UW
Frequency:	GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 846.6 MHz, 1852.4 – 1907.6 MHz
Technology tested:	GSM, UMTS
Antenna:	Integrated antenna
Power Supply:	3.8 V DC by Li - Ion battery
Temperature Range:	Not needed – normal test conditions only!

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Andreas Luckenbill
Expert

Test performed:

Marco Bertolino
Testing Manager

1 Table of contents

1	Table of contents	2
2	General information	4
2.1	Notes and disclaimer	4
2.2	Application details	4
3	Test standard/s	5
4	Test environment	5
5	Test item	5
5.1	Additional information	6
6	Test laboratories sub-contracted	6
7	Summary of measurement results	7
7.1	GSM 850	7
7.2	PCS 1900	7
7.3	UMTS band II	8
7.4	UMTS band V	8
8	RF measurements	9
8.1	Description of test setup	9
8.1.1	Radiated measurements	9
8.1.2	Conducted measurements	10
8.2	Results GSM 850	11
8.2.1	RF output power	11
8.2.2	Frequency stability	13
8.2.3	Spurious emissions radiated	14
8.2.4	Spurious emissions conducted	20
8.2.5	Block edge compliance	20
8.2.6	Occupied bandwidth	20
8.3	Results PCS 1900	21
8.3.1	RF output power	21
8.3.2	Frequency stability	23
8.3.3	Spurious emissions radiated	24
8.3.4	Spurious emissions conducted	37
8.3.5	Block edge compliance	37
8.3.6	Occupied bandwidth	37
8.4	Results UMTS band II	38
8.4.1	RF output power	38
8.4.2	Frequency stability	40
8.4.3	Spurious emissions radiated	41
8.4.4	Spurious emissions conducted	51
8.4.5	Block edge compliance	51
8.4.6	Occupied bandwidth	51
8.5	Results UMTS band V	52
8.5.1	RF output power	52
8.5.2	Frequency stability	54
8.5.3	Spurious emissions radiated	55
8.5.4	Spurious emissions conducted	62
8.5.5	Block edge compliance	62
8.5.6	Occupied bandwidth	62
9	Test equipment and ancillaries used for tests	63
10	Observations	63

Annex A	Document history	64
Annex B	Further information.....	64
Annex C	Accreditation Certificate	65

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2012-11-30
Date of receipt of test item:	2012-12-03
Start of test:	2012-12-03
End of test:	2013-01-11
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 22	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services
RSS - 132 Issue 2	2005-09	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz
RSS - 133 Issue 5	2009-02	Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services

4 Test environment

Temperature:	T _{nom}	+22 °C during room temperature tests
	T _{max}	+55 °C during high temperature tests
	T _{min}	-20 °C during low temperature tests
Relative humidity content:		42 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V _{nom}	3.8 V DC by Li – Ion battery
	V _{max}	-/- V
	V _{min}	-/- V

5 Test item

Kind of test item	:	Blackberry GSM Phones
Type identification	:	RFN81UW
S/N serial number	:	IMEI: 4401139252122
HW hardware status	:	CER-53015-001-Rev 2-905-01
SW software status	:	127.0.1.3901
Frequency band [MHz]	:	GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 846.6 MHz, 1852.4 – 1907.6 MHz
Type of modulation	:	GMSK, 8-PSK, QPSK, 16 – QAM
Antenna	:	Integrated antenna
Power supply	:	3.8 DC by Li – Ion battery
Temperature range	:	-20°C to +55 °C

5.1 Additional information

Test setup- and EUT-photos are included in test reports: 1-5579/12-01-01_AnnexA
1-5579/12-01-01_AnnexC

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 22, 24 RSS 132, 133	passed	2013-03-08	Tests according manufacturer test plan!

7.1 GSM 850

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Note: NA = Not applicable; NP = Not performed

7.2 PCS 1900

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Note: NA = Not applicable; NP = Not performed

7.3 UMTS band II

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Note: NA = Not applicable; NP = Not performed

7.4 UMTS band V

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Note: NA = Not applicable; NP = Not performed

8 RF measurements


8.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

8.1.1 Radiated measurements

The radiated emissions from the EUT are performed in a semi anechoic chamber. The EUT is placed on a conductive turntable and powered with nominal voltage. The signalling is performed either from outside the chamber with a signalling unit (AP or other) by air link using a signalling antenna or directly by special test software from the customer.

Semi anechoic chamber

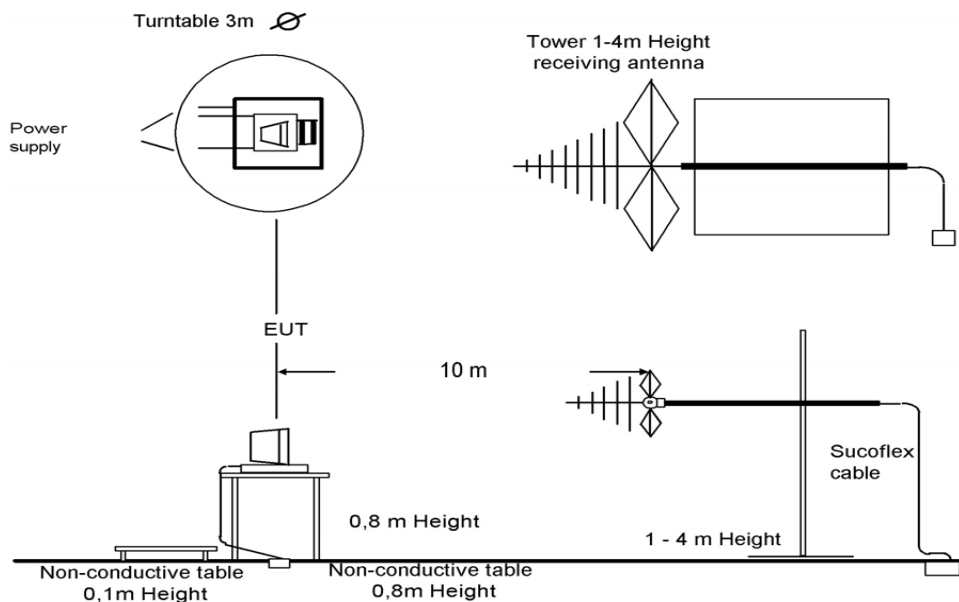


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the signalling unit (AP or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm. If special software is used, there is no power divider necessary.

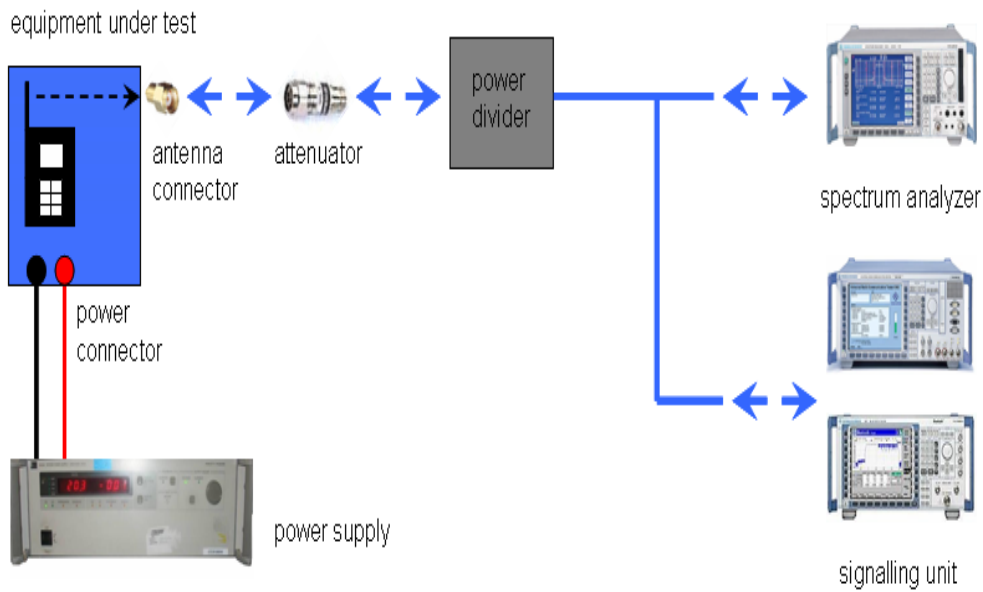

Picture 2: Diagram conducted measurements

The term measuring receiver refers to either a selective voltmeter or a spectrum analyser.

Frequency being measured f	Measuring receiver bandwidth 6 dB	Spectrum analyser bandwidth 3dB
f < 150 kHz	200 Hz or	300 Hz
150 kHz ≤ f < 25 MHz	9 kHz or	10 kHz
25 MHz ≤ f < 1000 MHz	120 kHz or	100 kHz
1000 MHz ≤ f		1 MHz
NOTE: Specific requirements in CEPT/ERC/Recommendation 70-03 [2] shall be applied where applicable.		

8.2 Results GSM 850

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

8.2.1 RF output power

Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	1 MHz
Resolution bandwidth:	1 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 22.913 CFR Part 2.1046	RSS 132, Issue 2, Section 4.4 and 6.4
Nominal Peak Output Power	
+38.45 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) GMSK mode	
Channel	Average Output Power (dBm) - ERP
128	25.9
190	26.5
251	27.9
Measurement uncertainty	± 2.0 dB

Output Power (radiated) 8-PSK mode	
Channel	Average Output Power (dBm) - ERP
128	23.1
190	23.7
251	24.0
Measurement uncertainty	± 2.0 dB

Result: **Passed**

8.2.2 Frequency stability

Not performed

8.2.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the GSM-850 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 22.917 CFR Part 2.1053	RSS 132, Issue 2, Section 4.5 and 6.5
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the GSM-850 band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages. All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

SPURIOUS EMISSION LEVEL (DBM)								
Harmonic	Ch. 128 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 189 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 251 Freq. (MHz)	Level [dBm]
2	1648.4	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	1672.8	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	1697.6	No critical emissions detected. All detected emissions are more than 20 dB below the limit!
3	2472.6		3	2509.2		3	2546.4	
4	3296.8		4	3345.6		4	3395.2	
5	4121.0		5	4182.0		5	4244.0	
6	4945.2		6	5018.4		6	5092.8	
7	5769.4		7	5854.8		7	5941.6	
8	6593.6		8	6691.2		8	6790.4	
9	7417.8		9	7527.6		9	7639.2	
10	8242.0		10	8364.0		10	8488.0	
Measurement uncertainty						± 3dB		


Result: Passed

Plots:


Plot 1: Channel 128 (30 MHz – 12.75 GHz) GSM

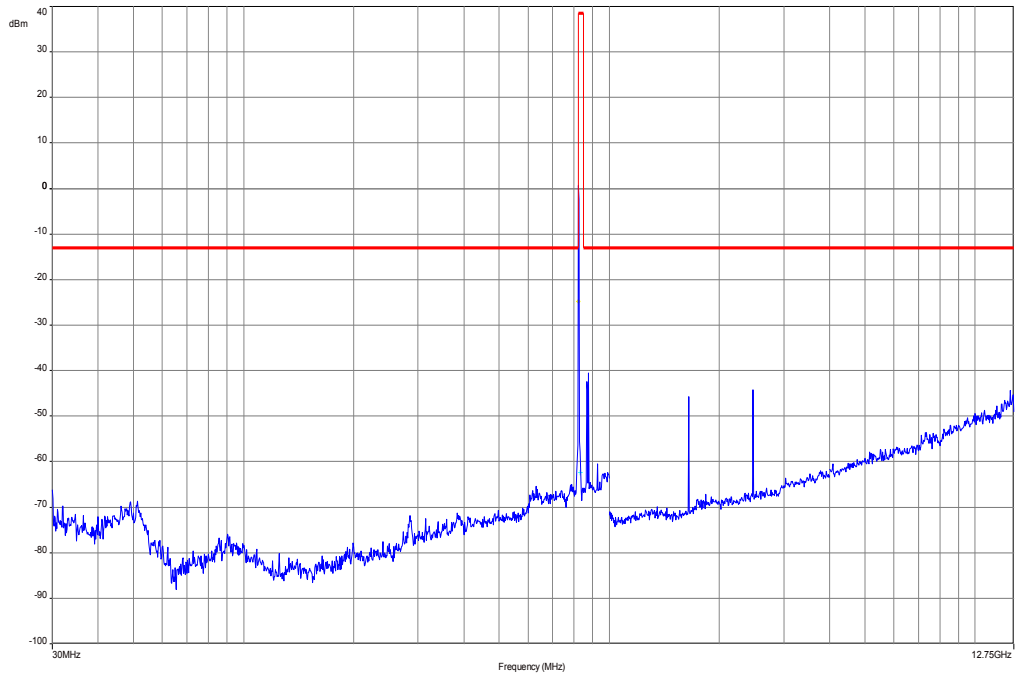


Plot 2: Channel 190 (30 MHz – 12.75 GHz) GSM

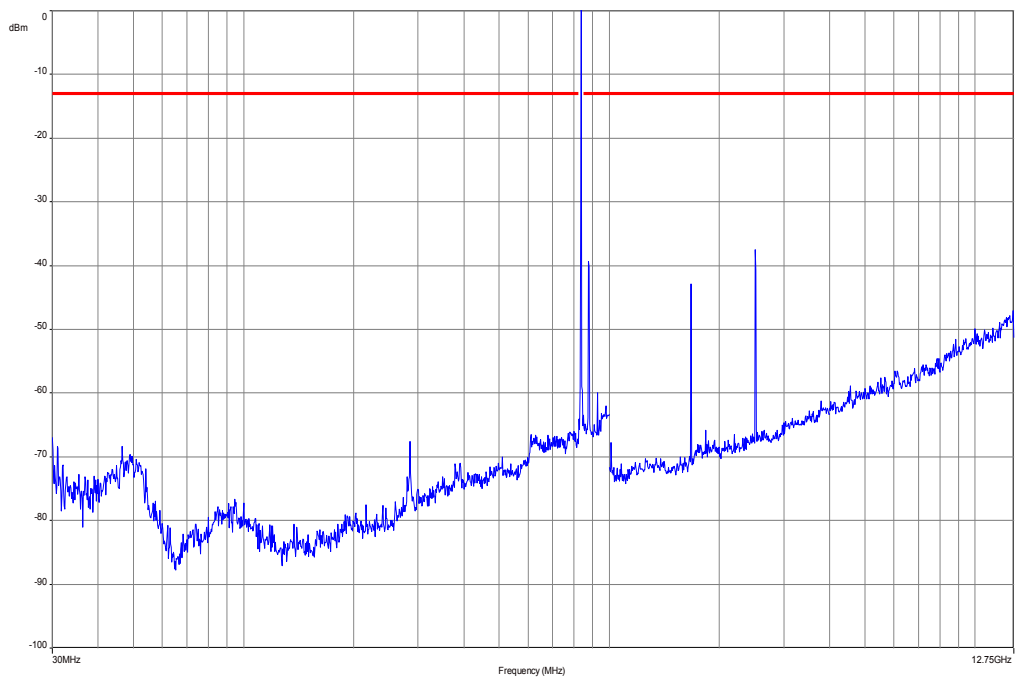


Plot 3: Channel 251 (30 MHz – 12.75 GHz) GSM

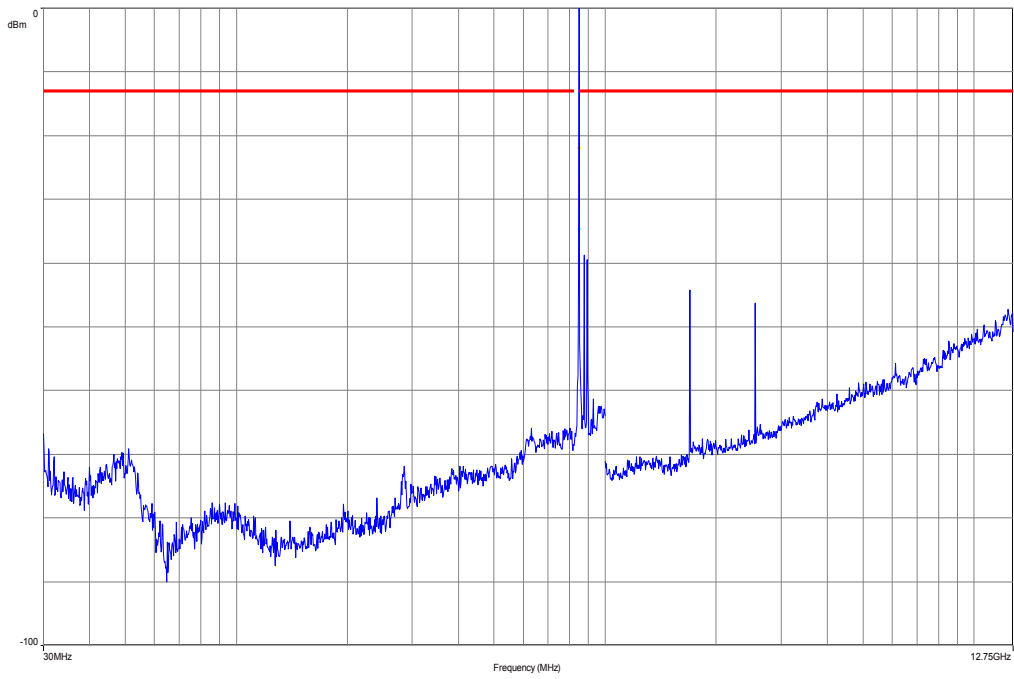


Plot 4: Channel 190 (30 MHz – 12.75 GHz) GPRS

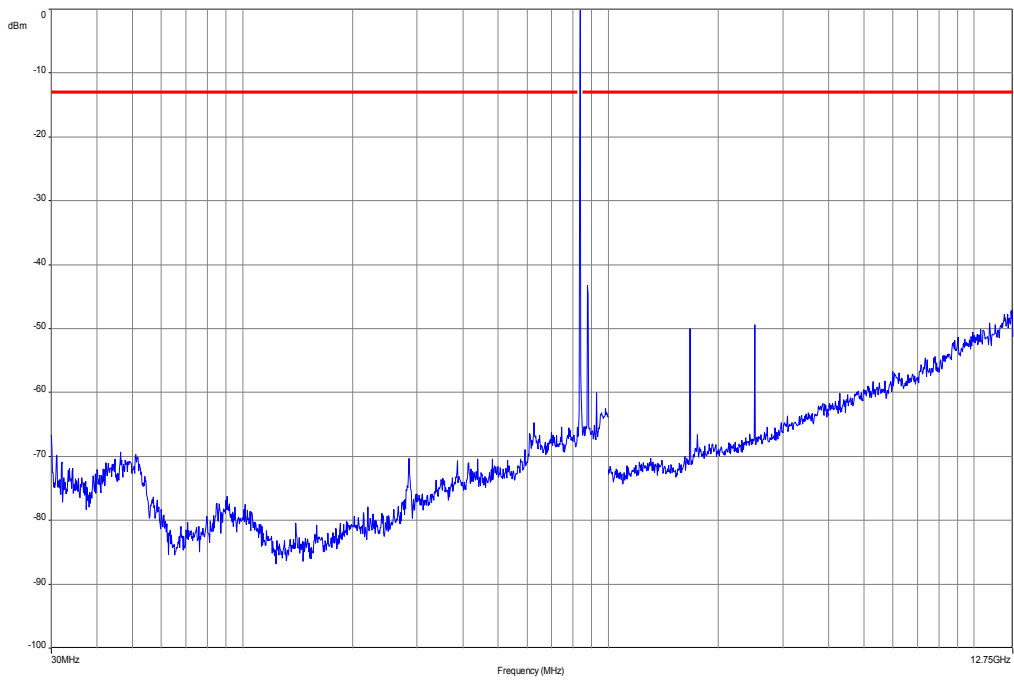


Plot 5: Channel 128 (30 MHz – 12.75 GHz) EDGE

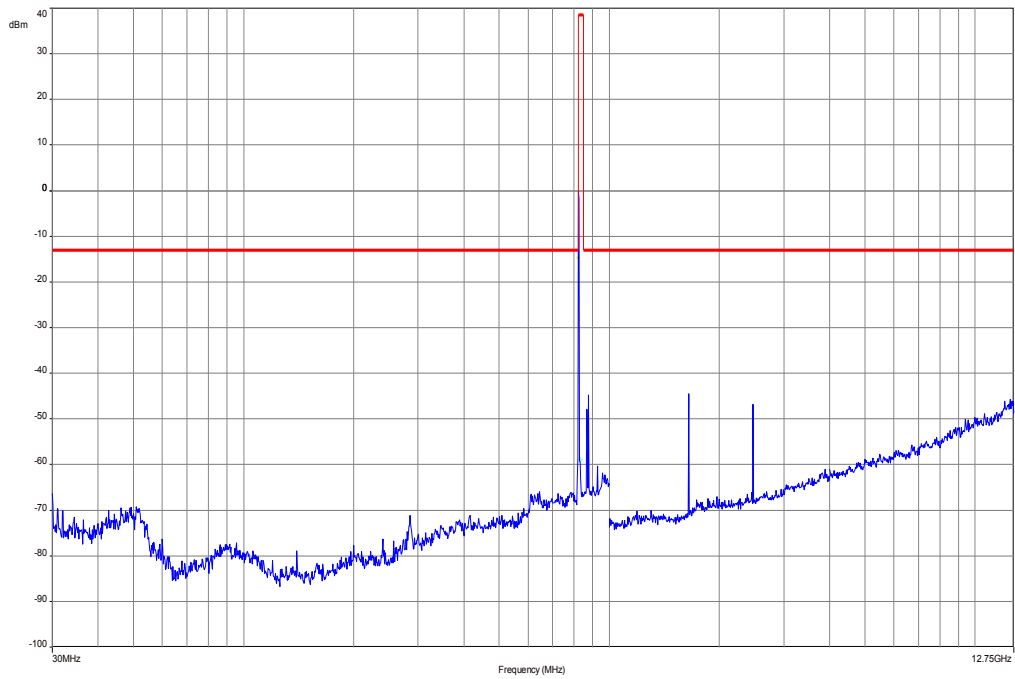

Plot 6: Channel 190 (30 MHz – 12.75 GHz) EDGE

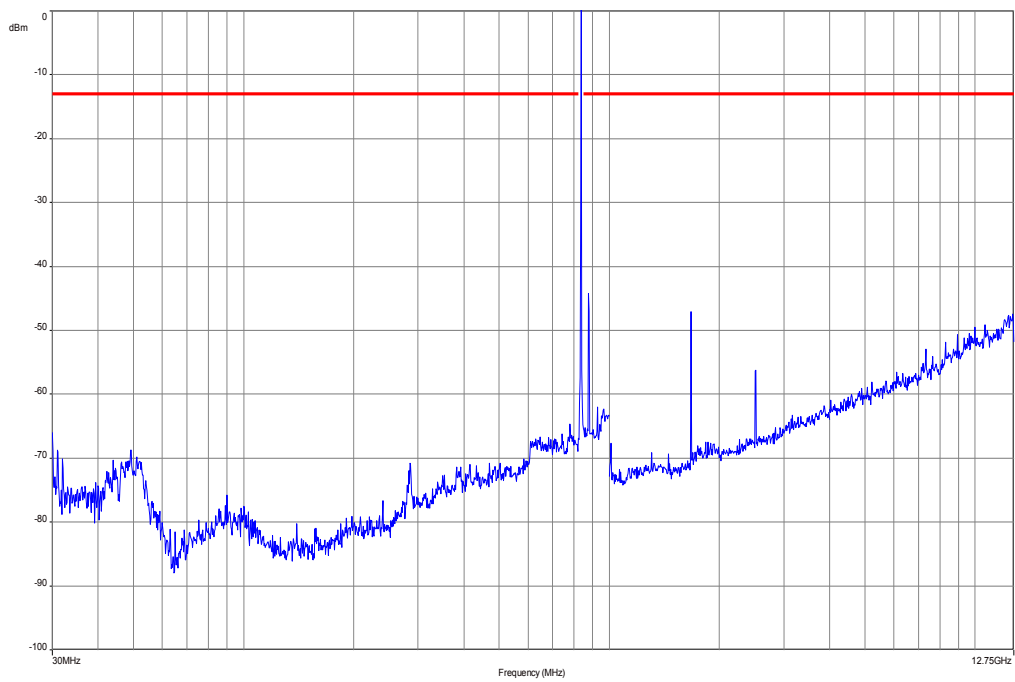

Plot 7: Channel 251 (30 MHz – 12.75 GHz) EDGE

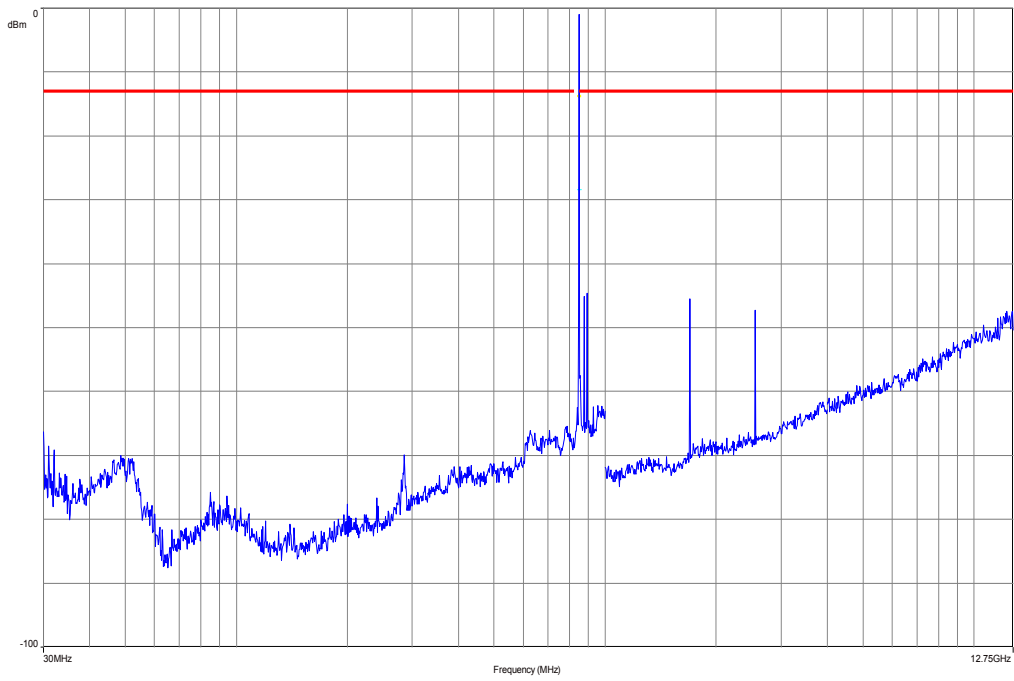

8.2.4 Spurious emissions conducted

Not performed

8.2.5 Block edge compliance

Not performed

8.2.6 Occupied bandwidth

Not performed

8.3 Results PCS 1900

All GSM-band measurements are done in GSM mode only (circuit switched). All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

8.3.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	1 MHz
Resolution bandwidth:	1 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 24.232 CFR Part 2.1046	RSS 133, Issue 5, Section 6.4
Nominal Peak Output Power	
+33.00 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) GMSK mode	
Channel	Average Output Power (dBm) - EIRP
512	27.4
661	28.5
810	30.2
Measurement uncertainty	± 2.0 dB

Output Power (radiated) 8-PSK mode	
Channel	Average Output Power (dBm) - EIRP
512	23.4
661	25.0
810	26.9
Measurement uncertainty	± 2.0 dB

Result: Passed

8.3.2 Frequency stability

Not performed

8.3.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 24.238 CFR Part 2.1053	RSS 133, Issue 5, Section 6.5
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages. All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

SPURIOUS EMISSION LEVEL (DBM)								
Harmonic	Ch. 512 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 661 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 810 Freq. (MHz)	Level [dBm]
2	3700.4	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	3760.0	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	3819.6	No critical emissions detected. All detected emissions are more than 20 dB below the limit!
3	5550.6		3	5640.0		3	5729.4	
4	7400.8		4	7520.0		4	7639.2	
5	9251.0		5	9400.0		5	9549.0	
6	11101.2		6	11280.0		6	11458.8	
7	12951.4		7	13160.0		7	13368.6	
8	14801.6		8	15040.0		8	15278.4	
9	16651.8		9	16920.0		9	17188.2	
10	18502.0		10	18800.0		10	19098.0	
Measurement uncertainty						± 3dB		

Result: Passed


Plots:

Plot 1: Channel 512 (30 MHz – 12.75 GHz) GSM

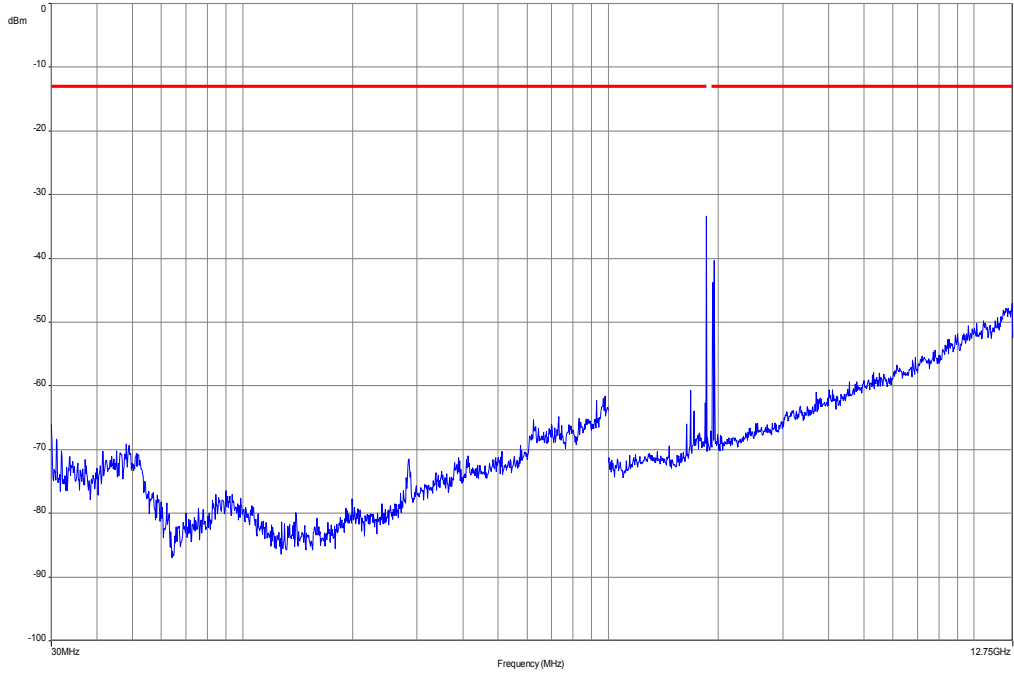


The carrier signal is notched with a band rejection filter.

Plot 2: Channel 512 (12.75 GHz – 18 GHz) GSM

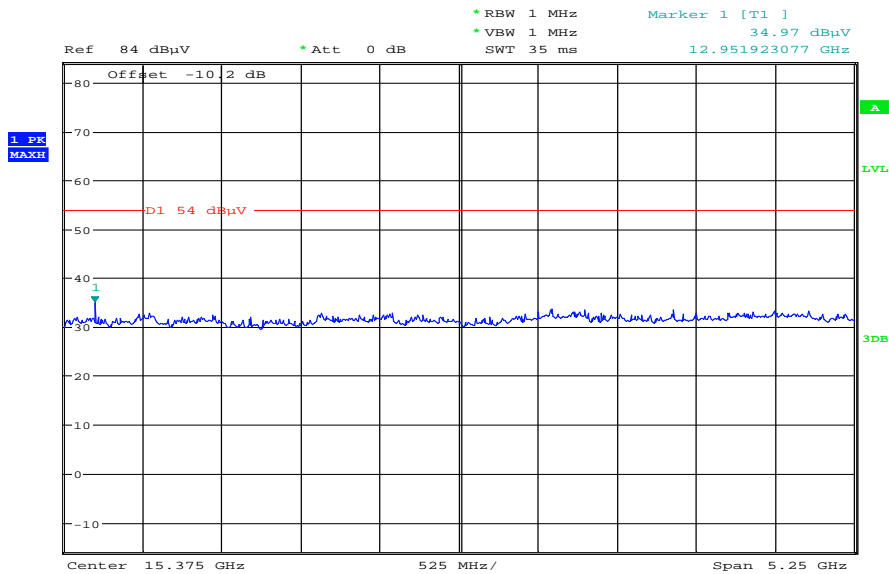


Date: 15.DEC.2012 10:28:57

Plot 3: Channel 512 (18 GHz – 26 GHz) GSM

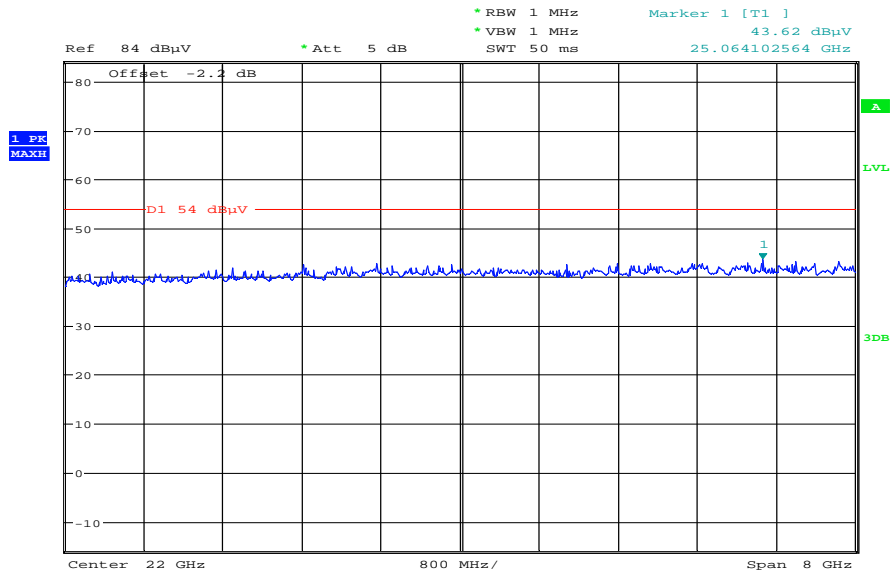


Date: 15.DEC.2012 10:55:37

Plot 4: Channel 661 (30 MHz – 12.75 GHz) GSM

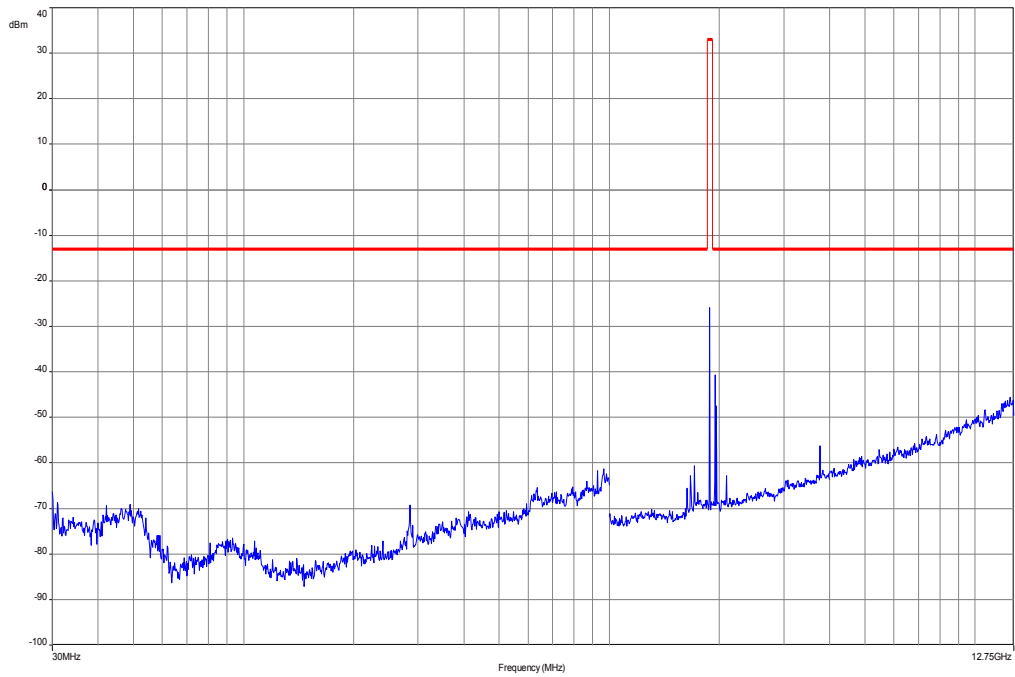


The carrier signal is notched with a band rejection filter.

Plot 5: Channel 661 (12.75 GHz – 18 GHz) GSM

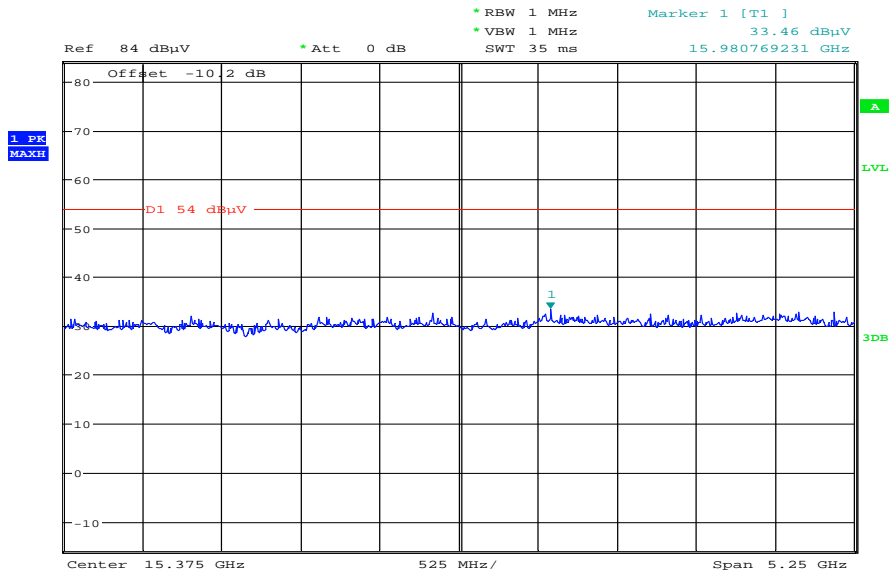


Date: 15.DEC.2012 10:48:27

Plot 6: Channel 661 (18 GHz – 26 GHz) GSM

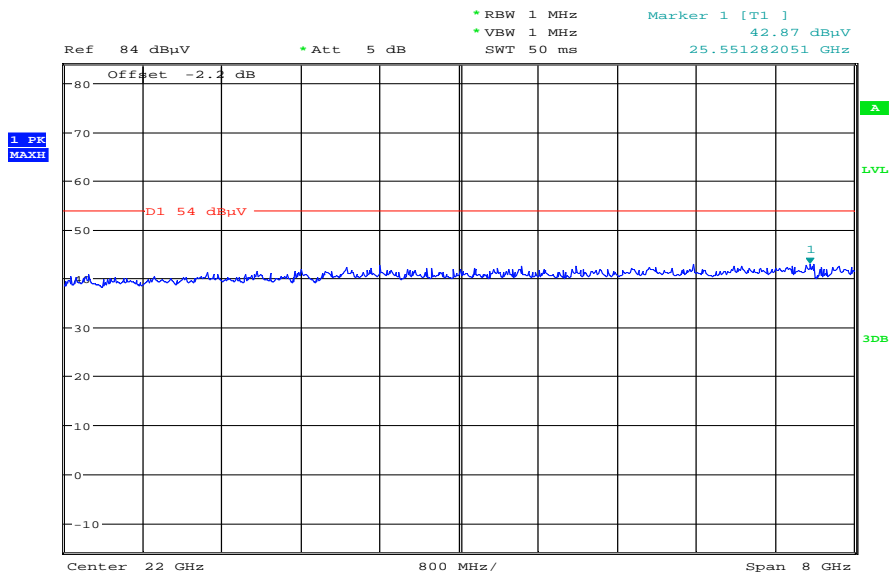


Date: 15.DEC.2012 10:54:23

Plot 7: Channel 810 (30 MHz – 12.75 GHz) GSM

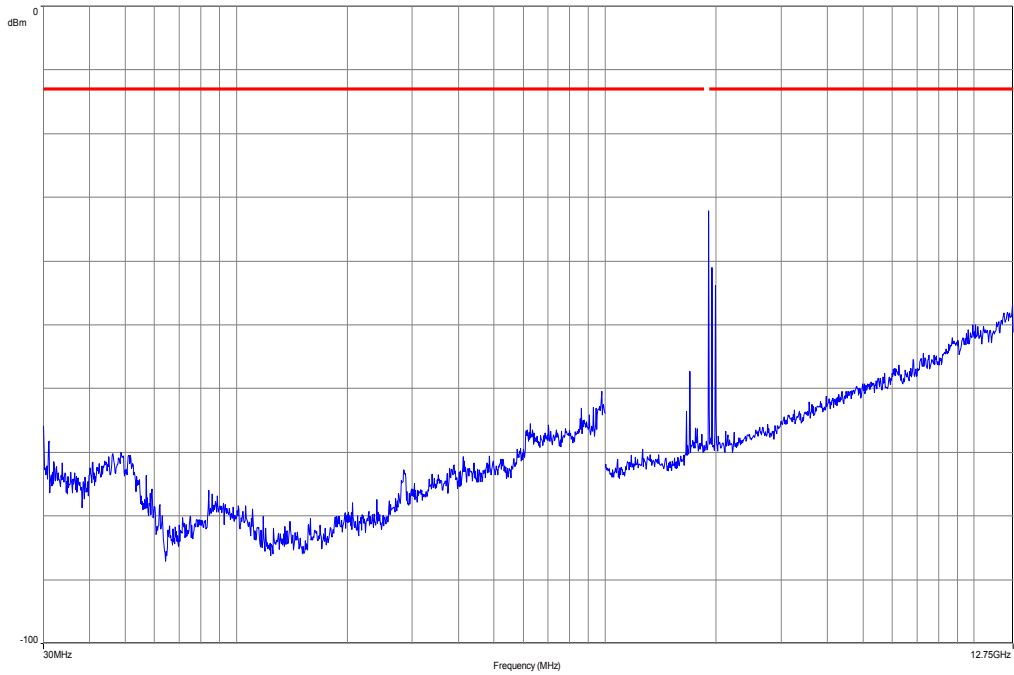


The carrier signal is notched with a band rejection filter.

Plot 8: Channel 810 (12.75 GHz – 18 GHz) GSM

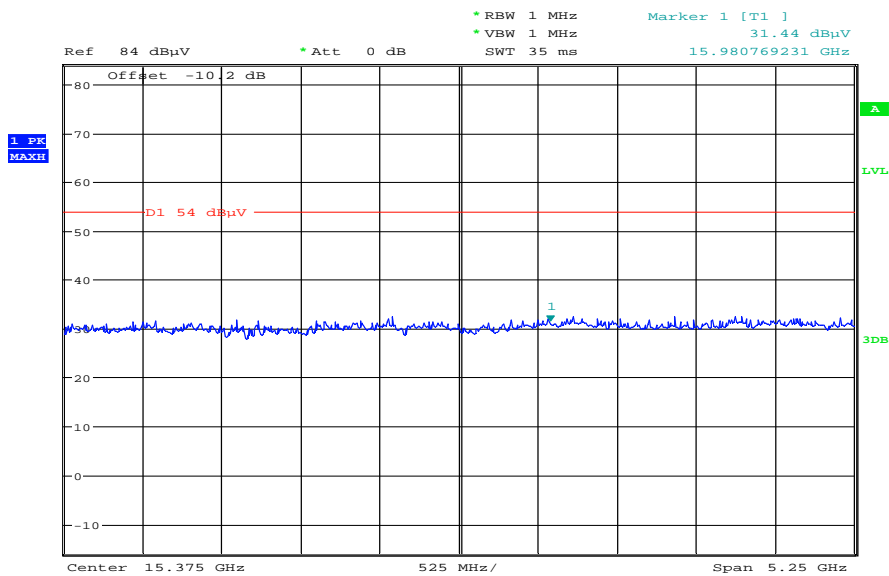


Date: 15.DEC.2012 10:50:23

Plot 9: Channel 810 (18 GHz – 26 GHz) GSM

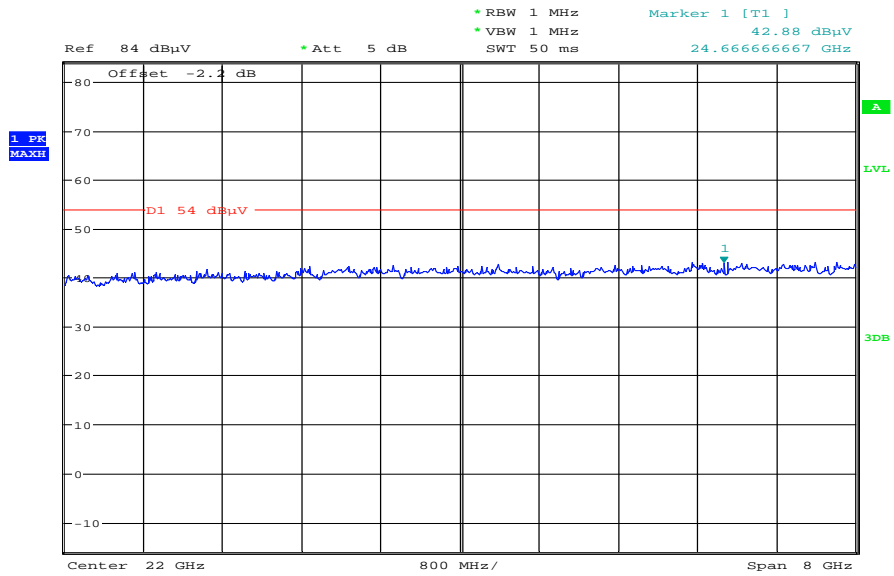


Date: 15.DEC.2012 10:52:23

Plot 10: Channel 661 (30 MHz – 12.75 GHz) GPRS

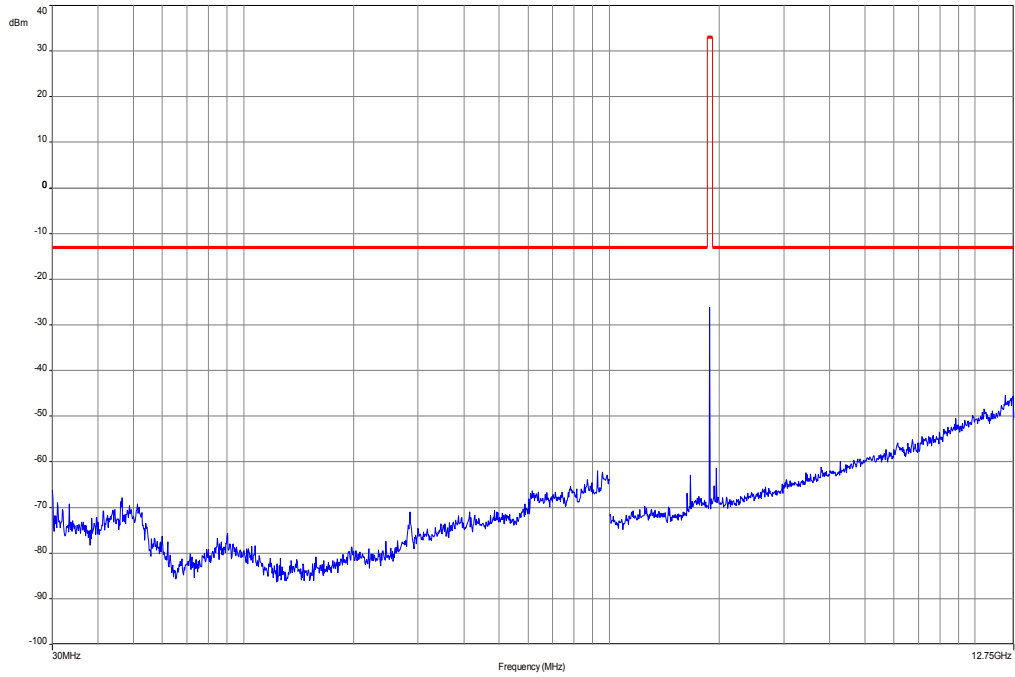


The carrier signal is notched with a band rejection filter.

Plot 11: Channel 661 (12.75 GHz – 18 GHz) GPRS

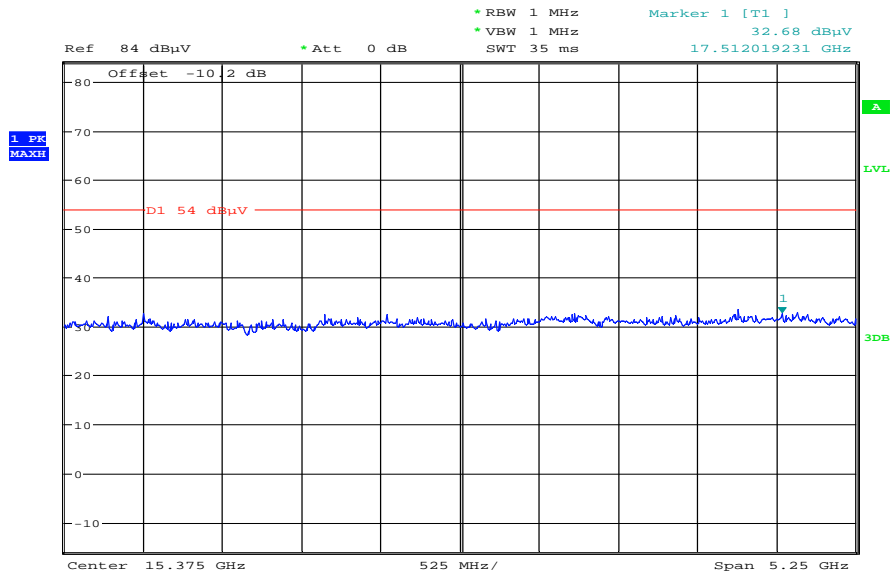


Date: 15.DEC.2012 11:10:13

Plot 12: Channel 661 (18 GHz – 26 GHz) GPRS

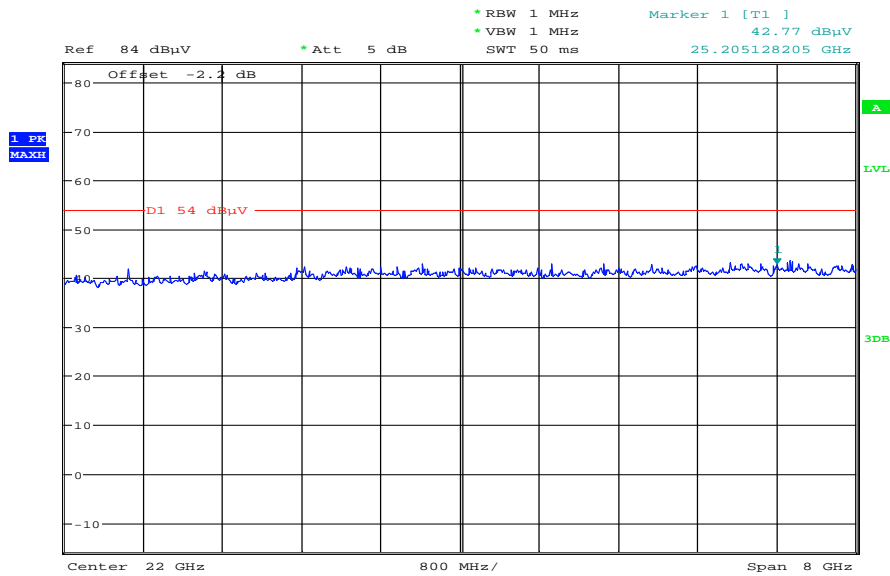


Date: 15.DEC.2012 11:11:54

Plot 13: Channel 512 (30 MHz – 12.75 GHz) EDGE

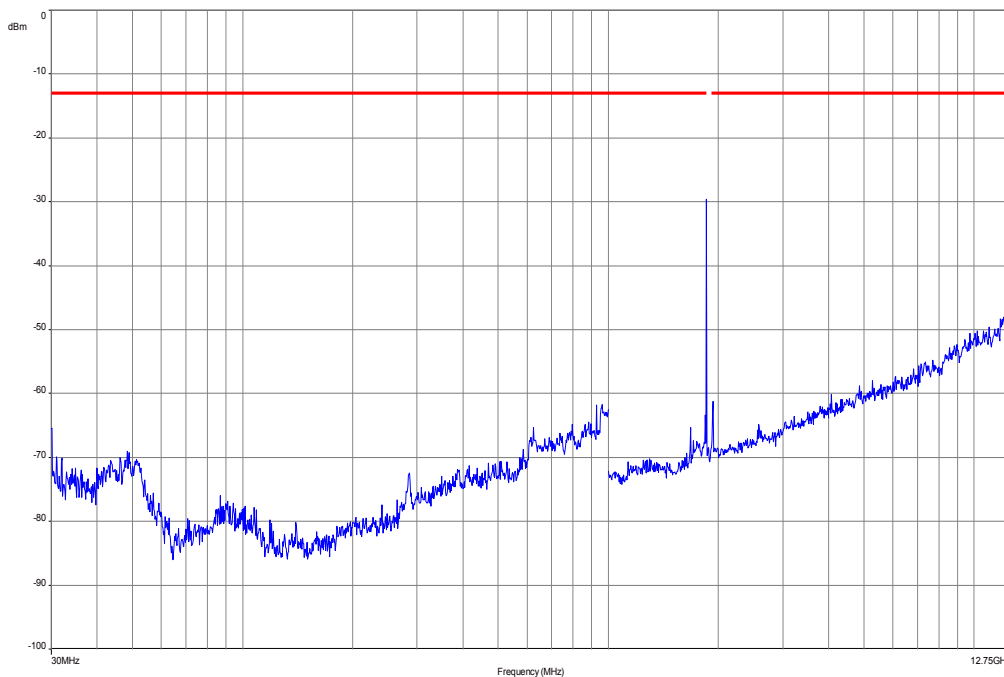


The carrier signal is notched with a band rejection filter.

Plot 14: Channel 512 (12.75 GHz – 18 GHz) EDGE

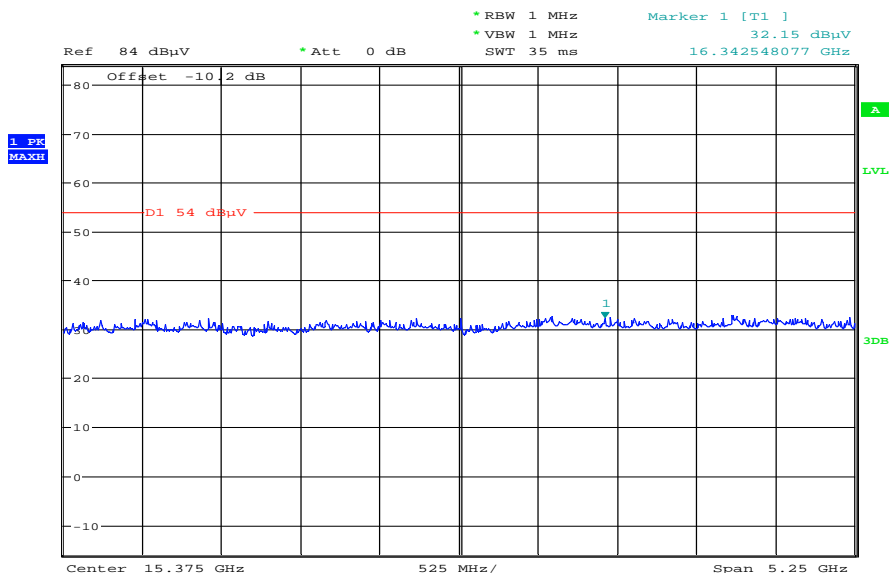


Date: 15.DEC.2012 11:15:58

Plot 15: Channel 512 (18 GHz – 26 GHz) EDGE

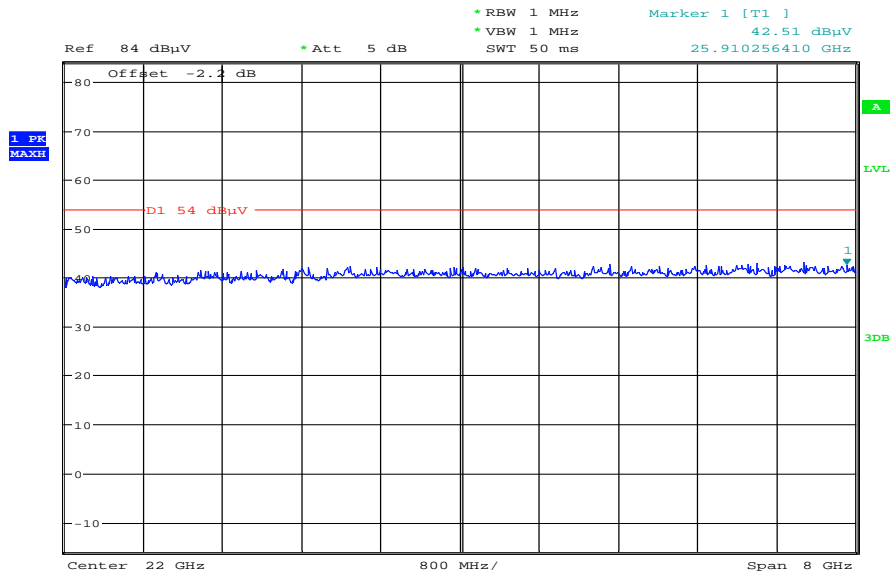


Date: 15.DEC.2012 11:13:20

Plot 16: Channel 661 (30 MHz – 12.75 GHz) EDGE

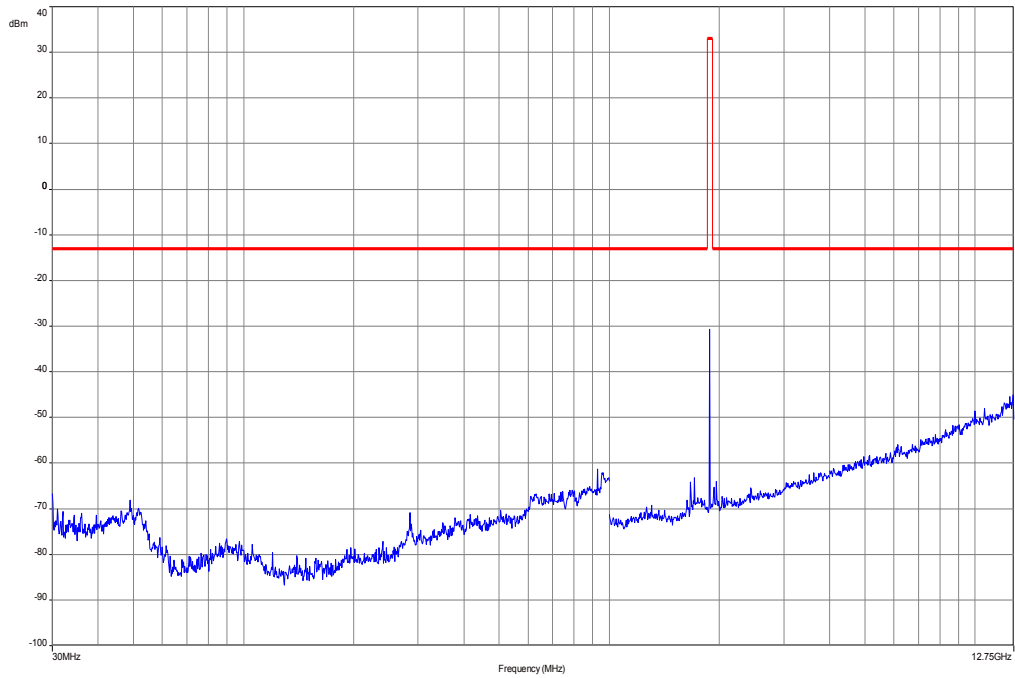


The carrier signal is notched with a band rejection filter.

Plot 17: Channel 661 (12.75 GHz – 18 GHz) EDGE

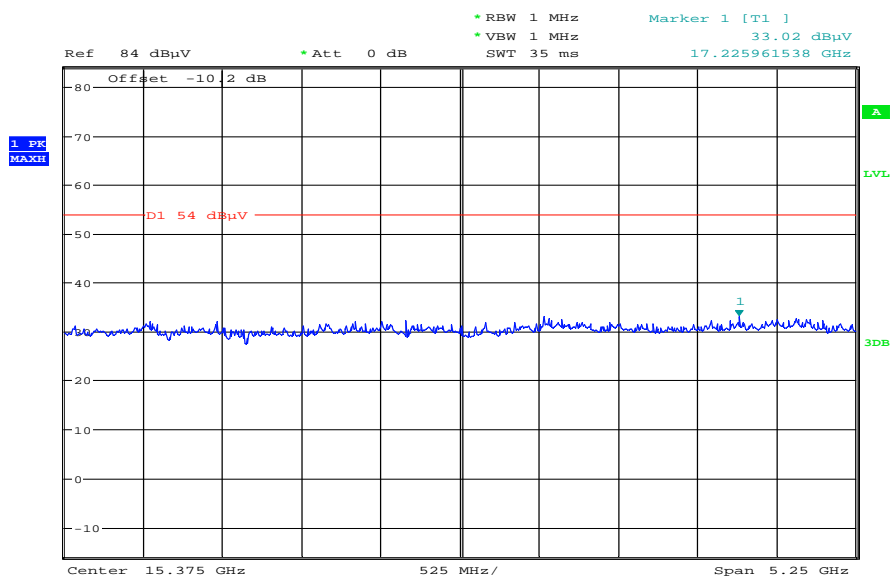


Date: 15.DEC.2012 11:16:35

Plot 18: Channel 661 (18 GHz – 26 GHz) EDGE

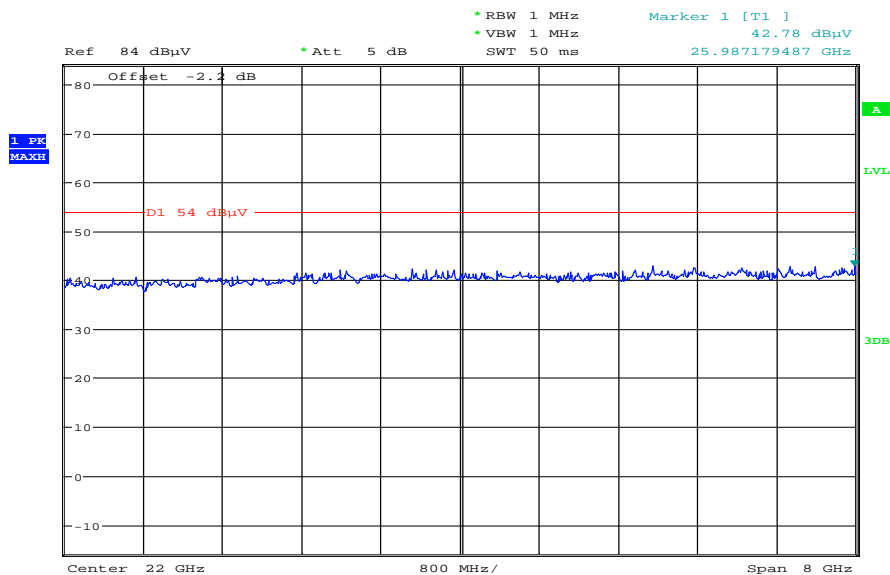


Date: 15.DEC.2012 11:13:53

Plot 19: Channel 810 (30 MHz – 12.75 GHz) EDGE

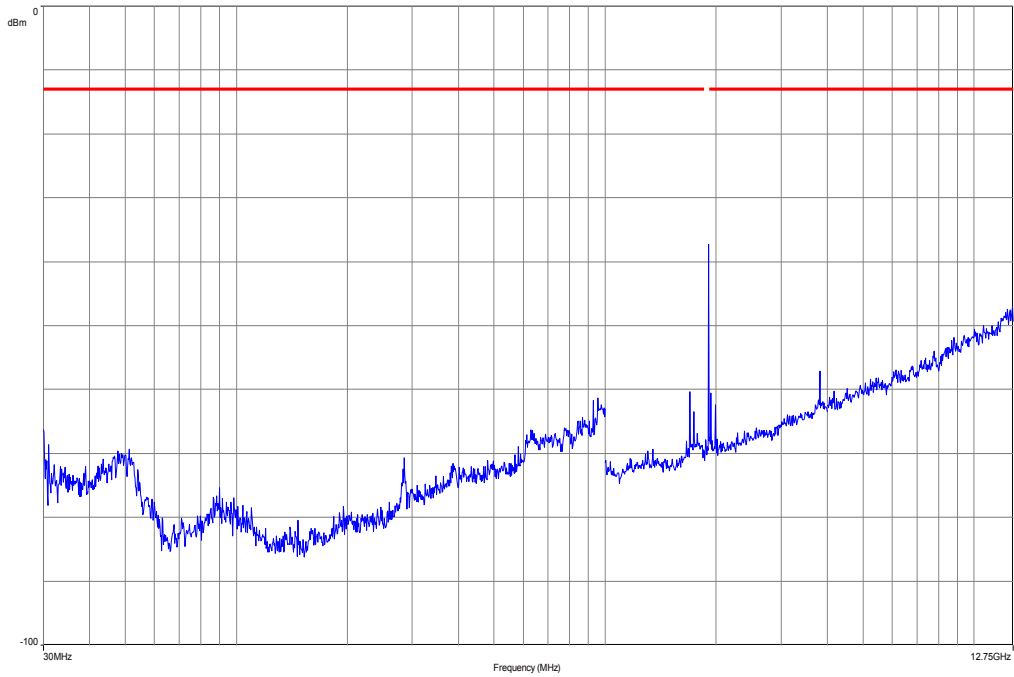


The carrier signal is notched with a band rejection filter.

Plot 20: Channel 810 (12.75 GHz – 18 GHz) EDGE

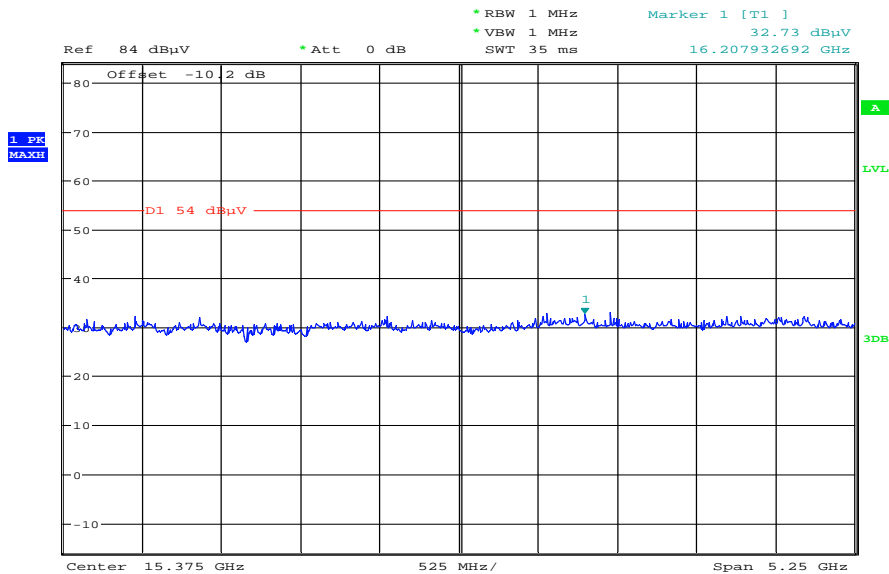

Date: 15.DEC.2012 11:17:03

Plot 21: Channel 810 (18 GHz – 26 GHz) EDGE

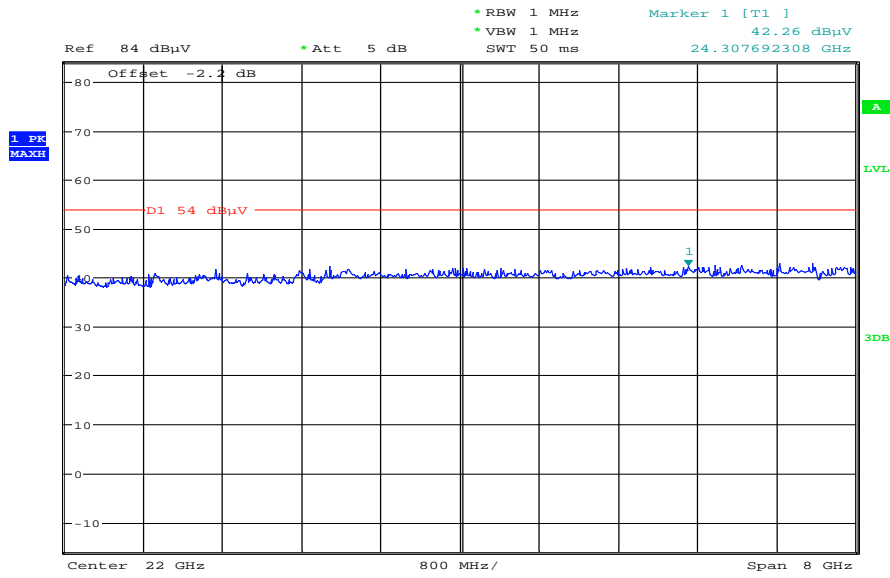

Date: 15.DEC.2012 11:14:27

8.3.4 Spurious emissions conducted

Not performed

8.3.5 Block edge compliance

Not performed

8.3.6 Occupied bandwidth

Not performed

8.4 Results UMTS band II

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

8.4.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	10 MHz
Resolution bandwidth:	10 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 24.232 CFR Part 2.1046	RSS 133, Issue 5, Section 6.4
Nominal Peak Output Power	
+33.00 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) WCDMA mode	
Channel	Average Output Power (dBm) - EIRP
9262	21.8
9400	22.1
9538	23.6
Measurement uncertainty	± 2.0 dB

Output Power (radiated) HSUPA mode	
Channel	Average Output Power (dBm) - EIRP
9262	21.9
9400	23.0
9538	23.4
Measurement uncertainty	± 2.0 dB

Output Power (radiated) HSPA+ mode	
Channel	Average Output Power (dBm) - EIRP
9262	22.0
9400	22.0
9538	22.1
Measurement uncertainty	± 2.0 dB

Result: **Passed**

8.4.2 Frequency stability

Not performed

8.4.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band II.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 24.238 CFR Part 2.1053	RSS 133, Issue 5, Section 6.5
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band II (1852.4 MHz, 1880.0 MHz and 1907.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band II into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages. All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

SPURIOUS EMISSION LEVEL (DBM)								
Harmonic	Ch. 9262 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9400 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9538 Freq. (MHz)	Level [dBm]
2	3704.8	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	3760.0	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	3815.2	No critical emissions detected. All detected emissions are more than 20 dB below the limit!
3	5557.2		3	5640.0		3	5722.8	
4	7409.6		4	7520.0		4	7630.4	
5	9262.0		5	9400.0		5	9538.0	
6	11114.4		6	11280.0		6	11445.6	
7	12966.8		7	13160.0		7	13353.2	
8	14819.2		8	15040.0		8	15260.8	
9	16671.6		9	16920.0		9	17168.4	
10	18524.0		10	18800.0		10	19076.0	
Measurement uncertainty						± 3dB		


Result: Passed

Plots:


Plot 1: Channel 9262 (30 MHz – 12.75 GHz)

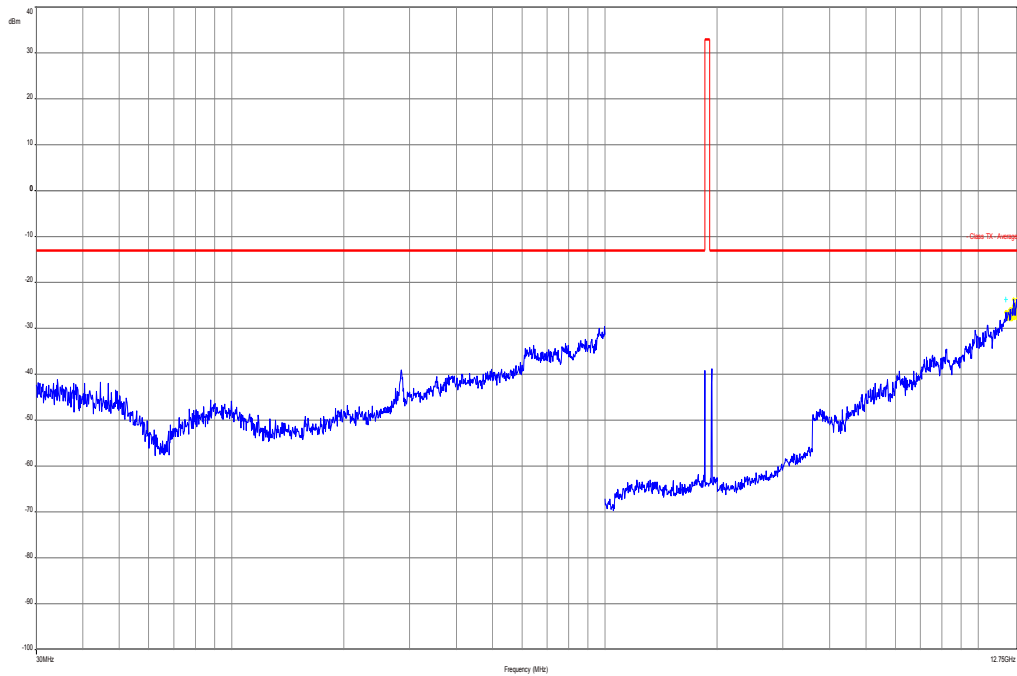


Plot 2: Channel 9262 (30 MHz – 12.75 GHz) HSUPA

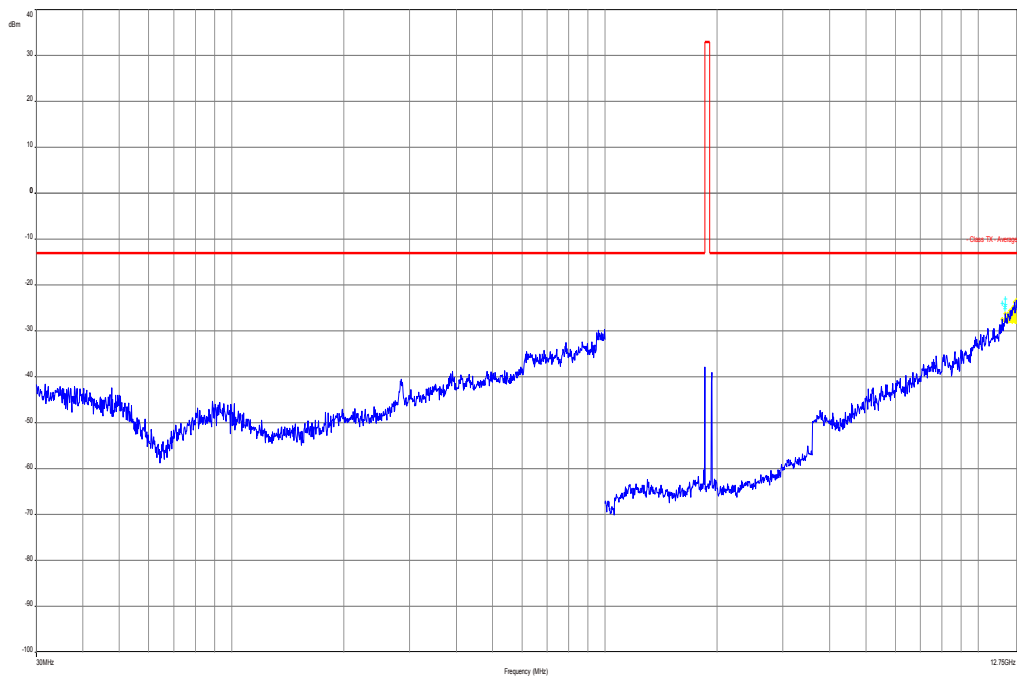

Plot 3: Channel 9262 (30 MHz – 12.75 GHz) HSPA+

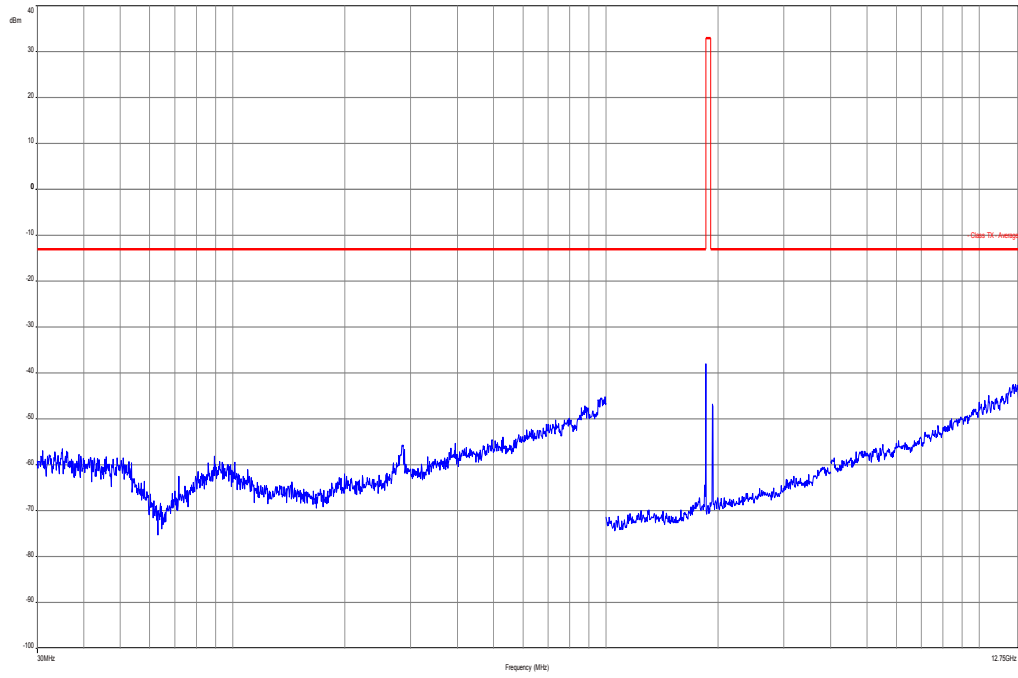


Plot 4: Channel 9262 (12.75 GHz – 18 GHz) – valid for all modes

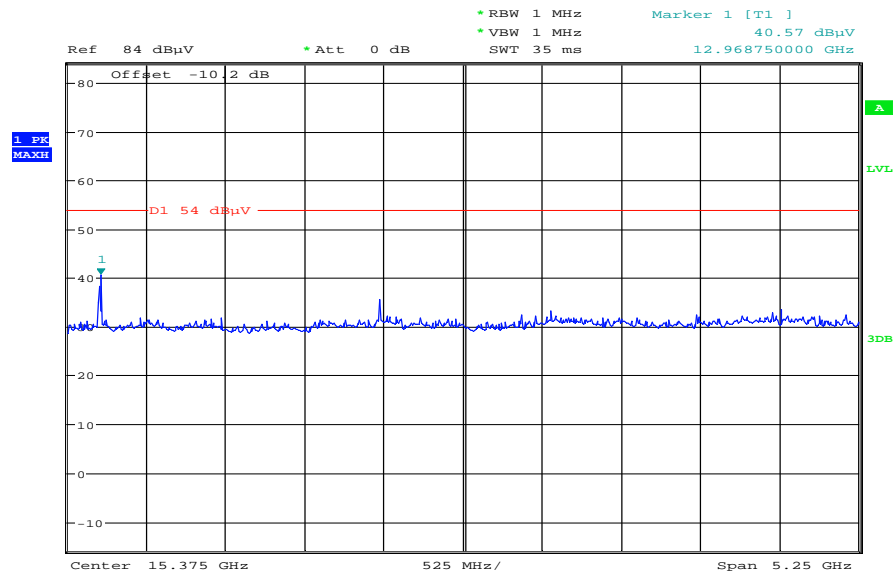


Date: 15.DEC.2012 11:34:58

Plot 5: Channel 9262 (18 GHz – 26 GHz) – valid for all modes

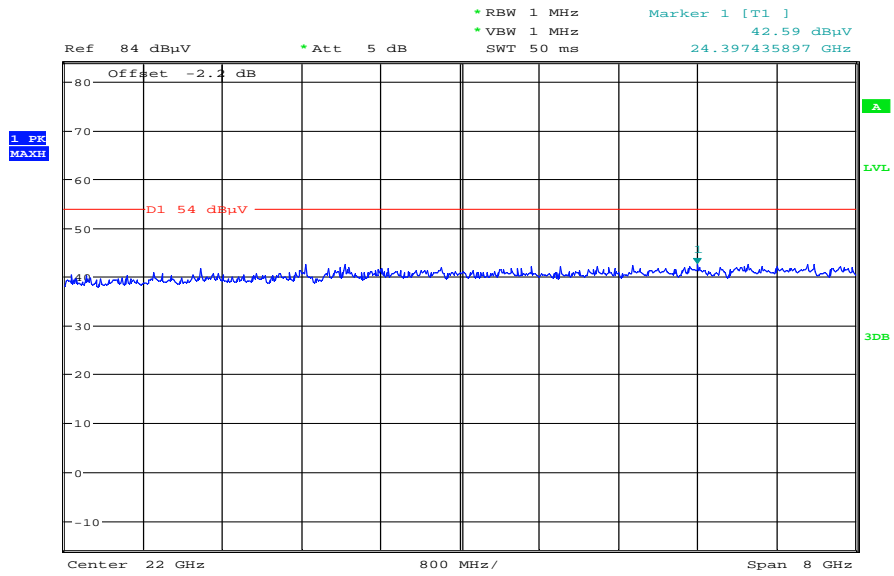


Date: 15.DEC.2012 11:39:56


Plot 6: Channel 9400 (30 MHz – 12.75 GHz)

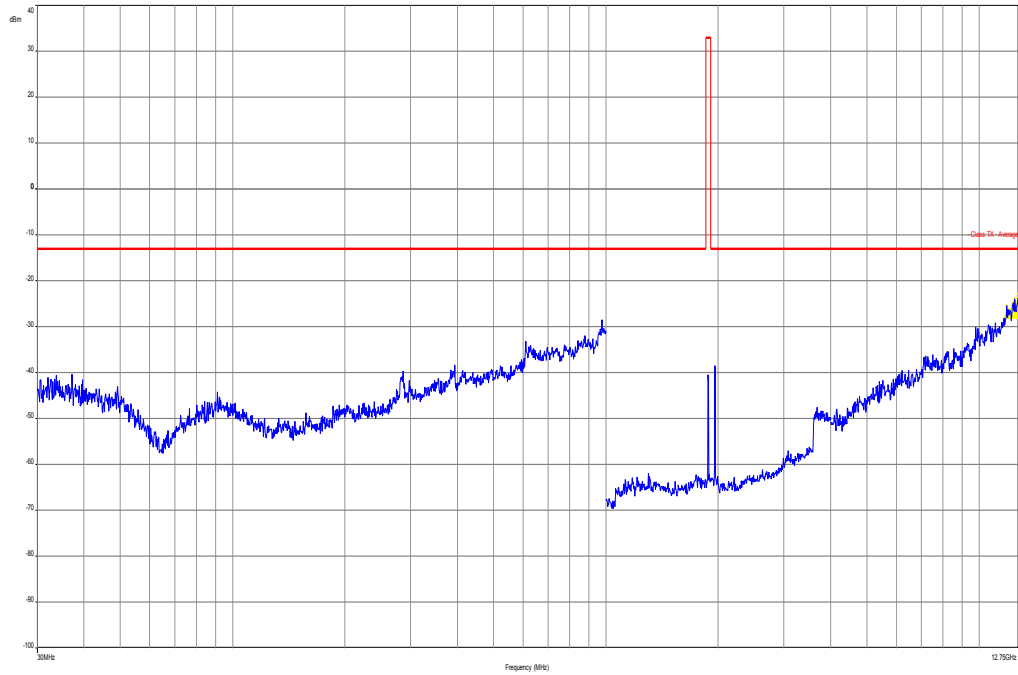


Plot 7: Channel 9400 (30 MHz – 12.75 GHz) HSUPA

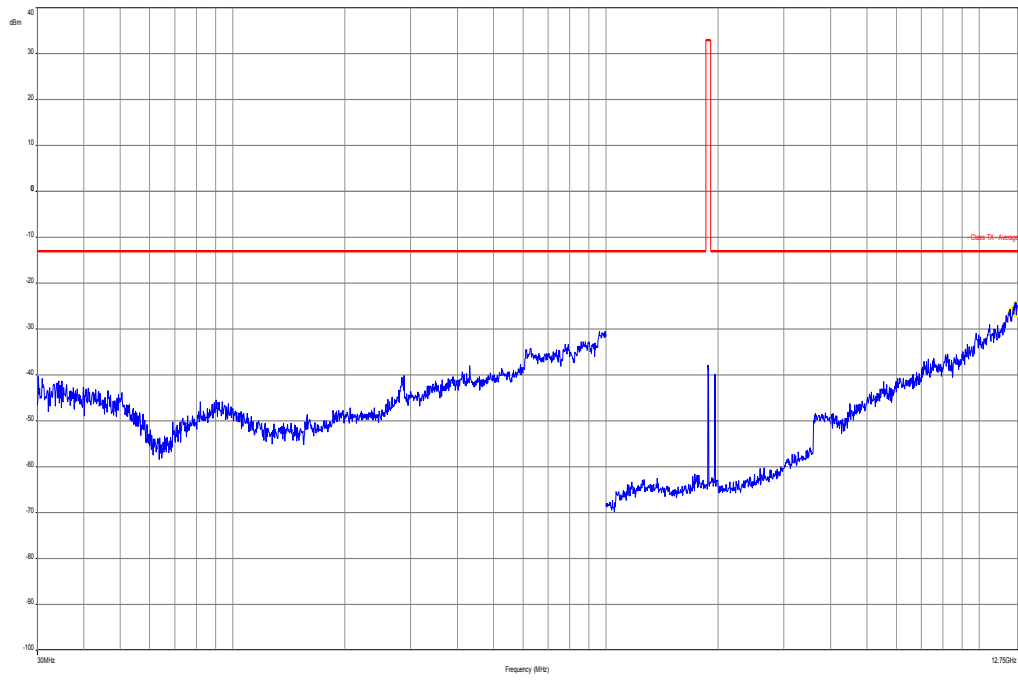

Plot 8: Channel 9400 (30 MHz – 12.75 GHz) HSPA+

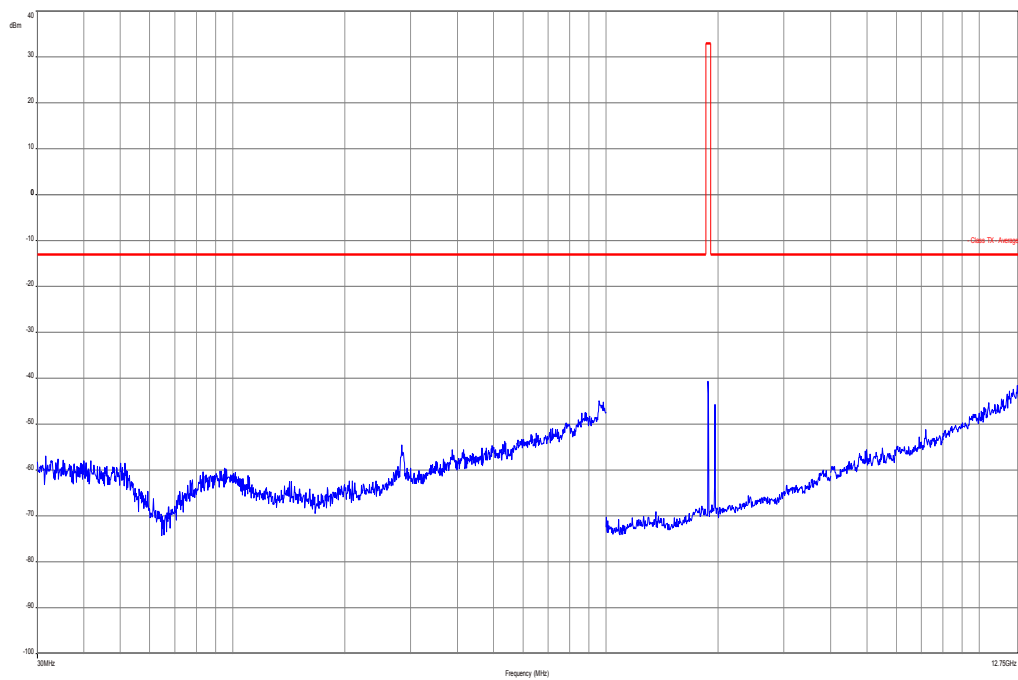


Plot 9: Channel 9400 (12.75 GHz – 18 GHz) – valid for all modes

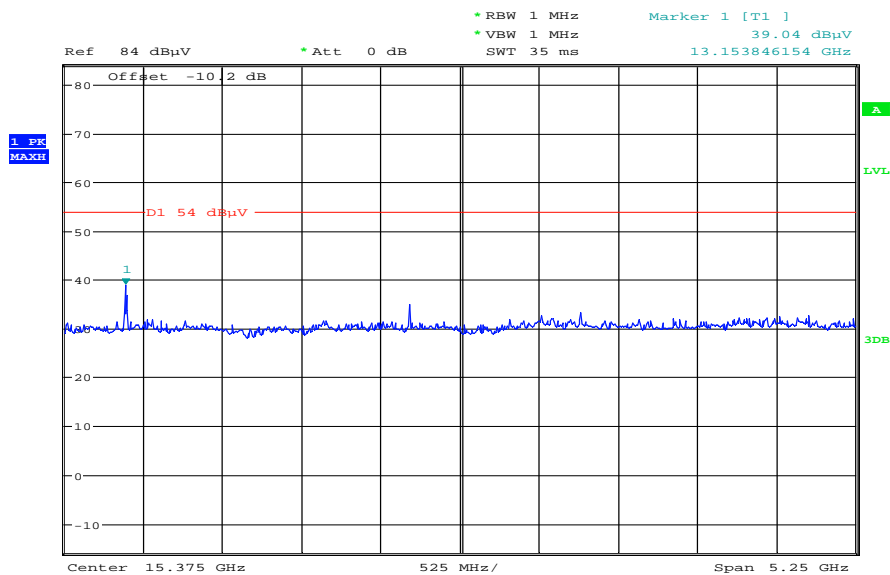


Date: 15.DEC.2012 11:35:48

Plot 10: Channel 9400 (18 GHz – 26 GHz) – valid for all modes

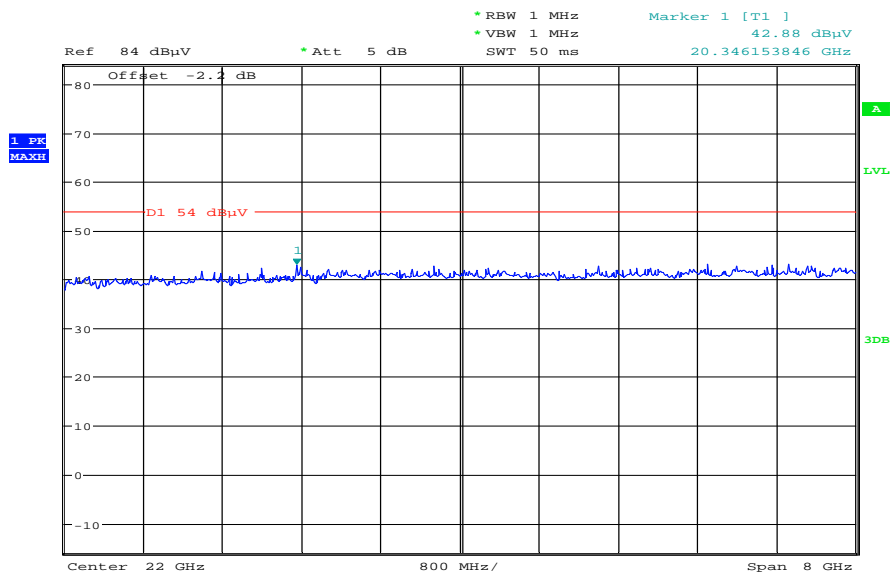


Date: 15.DEC.2012 11:39:14


Plot 11: Channel 9538 (30 MHz – 12.75 GHz)

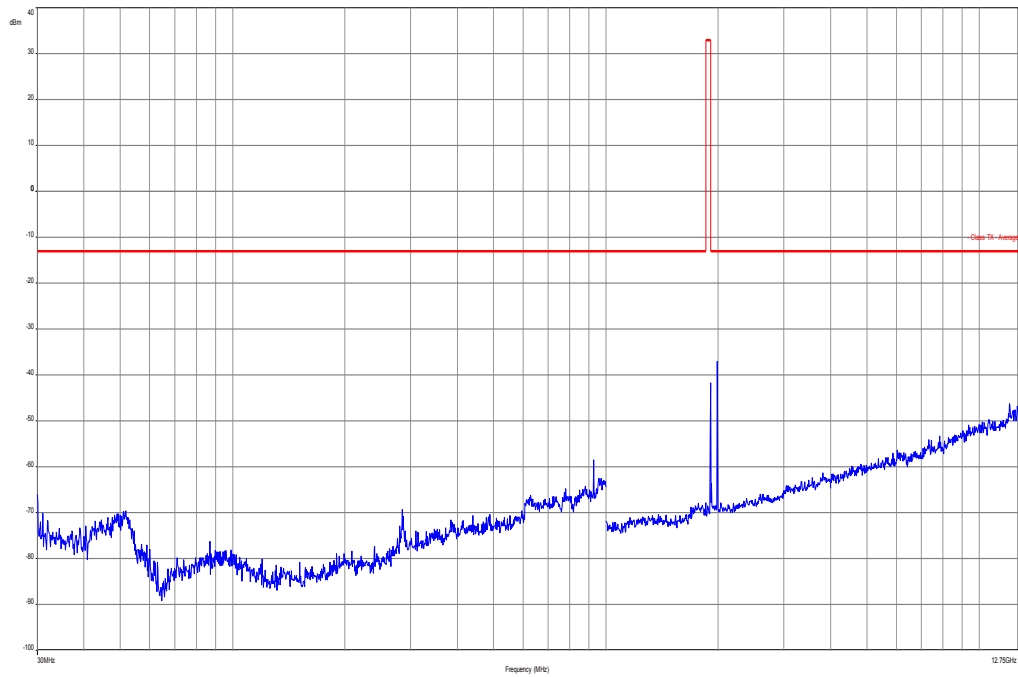


Plot 12: Channel 9538 (30 MHz – 12.75 GHz) HSUPA

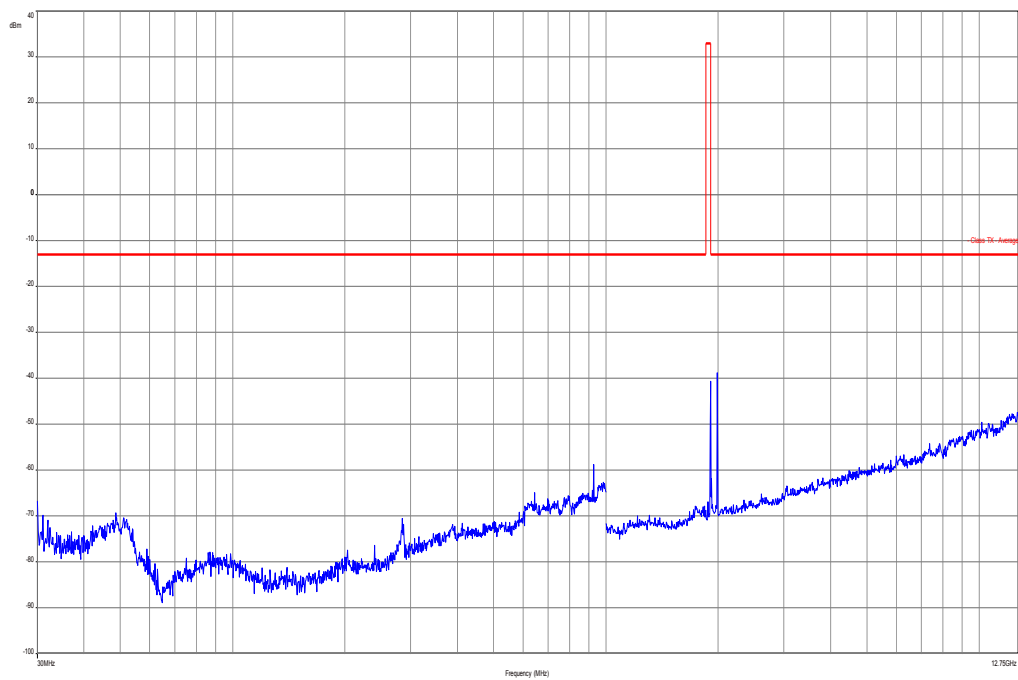

Plot 13: Channel 9538 (30 MHz – 12.75 GHz) HSPA+

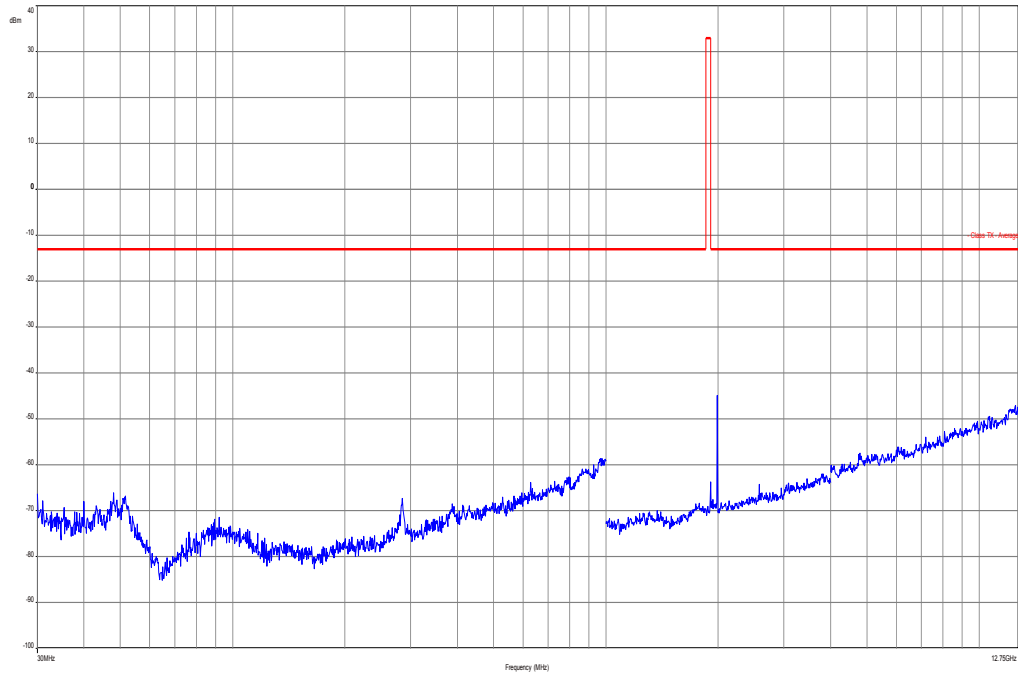


Plot 14: Channel 9538 (12.75 GHz – 18 GHz) – valid for all modes

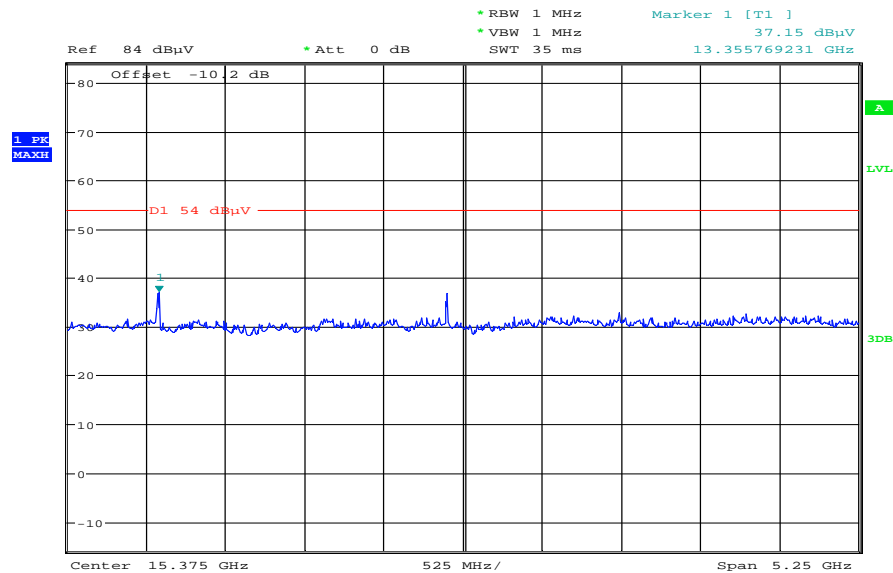

Date: 15.DEC.2012 11:36:49

Plot 15: Channel 9538 (18 GHz – 26 GHz) – valid for all modes

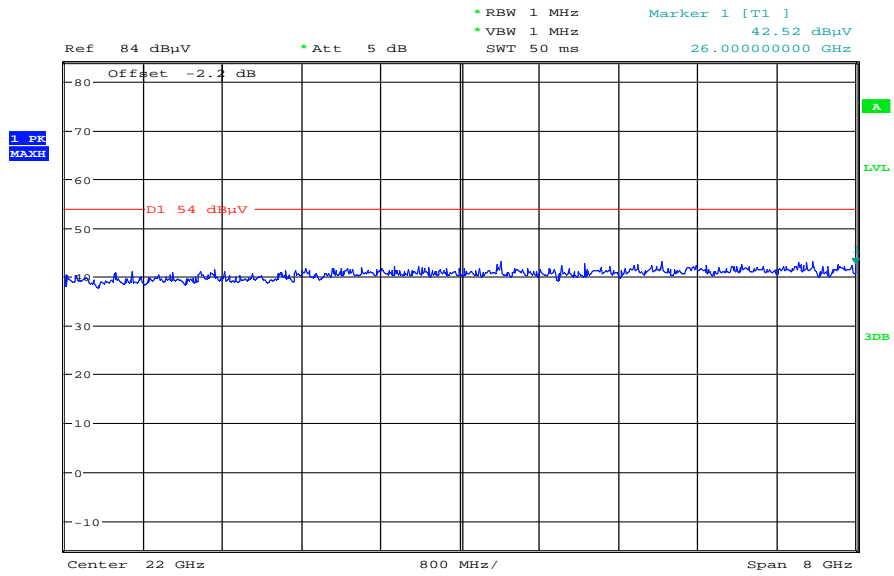

Date: 15.DEC.2012 11:38:00

8.4.4 Spurious emissions conducted

Not performed

8.4.5 Block edge compliance

Not performed

8.4.6 Occupied bandwidth

Not performed

8.5 Results UMTS band V

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

8.5.1 RF output power

Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	10 MHz
Resolution bandwidth:	10 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 22.913 CFR Part 2.1046	RSS 132, Issue 2, Section 4.4 and 6.4
Nominal Peak Output Power	
+38.45 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (radiated) WCDMA mode	
Channel	Average Output Power (dBm) - ERP
4132	17.7
4182	18.1
4233	19.0
Measurement uncertainty	± 2.0 dB

Output Power (radiated) HSUPA mode	
Channel	Average Output Power (dBm) - ERP
4132	18.0
4182	18.2
4233	19.0
Measurement uncertainty	± 2.0 dB

Output Power (radiated) HSPA+ mode	
Channel	Average Output Power (dBm) - ERP
4132	19.7
4182	19.5
4233	19.4
Measurement uncertainty	± 2.0 dB

Result: Passed

8.5.2 Frequency stability

Not performed

8.5.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 846.6 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band V.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 22.917 CFR Part 2.1053	RSS 132, Issue 2, Section 4.5 and 6.5
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band V (826.4 MHz, 836.0 MHz and 846.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages. All measurements were done in horizontal and vertical polarization; the plots show the worst case. The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

SPURIOUS EMISSION LEVEL (DBM)								
Harmonic	Ch. 4132 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4180 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4233 Freq. (MHz)	Level [dBm]
2	1652.8	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	1672.0	No critical emissions detected. All detected emissions are more than 20 dB below the limit!	2	1693.2	No critical emissions detected. All detected emissions are more than 20 dB below the limit!
3	2479.2		3	2508.0		3	2539.8	
4	3305.6		4	3344.0		4	3386.4	
5	4132.0		5	4180.0		5	4233.0	
6	4958.4		6	5016.0		6	5079.6	
7	5784.8		7	5852.0		7	5926.2	
8	6611.2		8	6688.0		8	6772.8	
9	7437.6		9	7524.0		9	7619.4	
10	8264.0		10	8360.0		10	8466.0	
Measurement uncertainty						± 3dB		


Result: Passed

Plots:


Plot 1: Channel 4132 (30 MHz – 12.75 GHz)

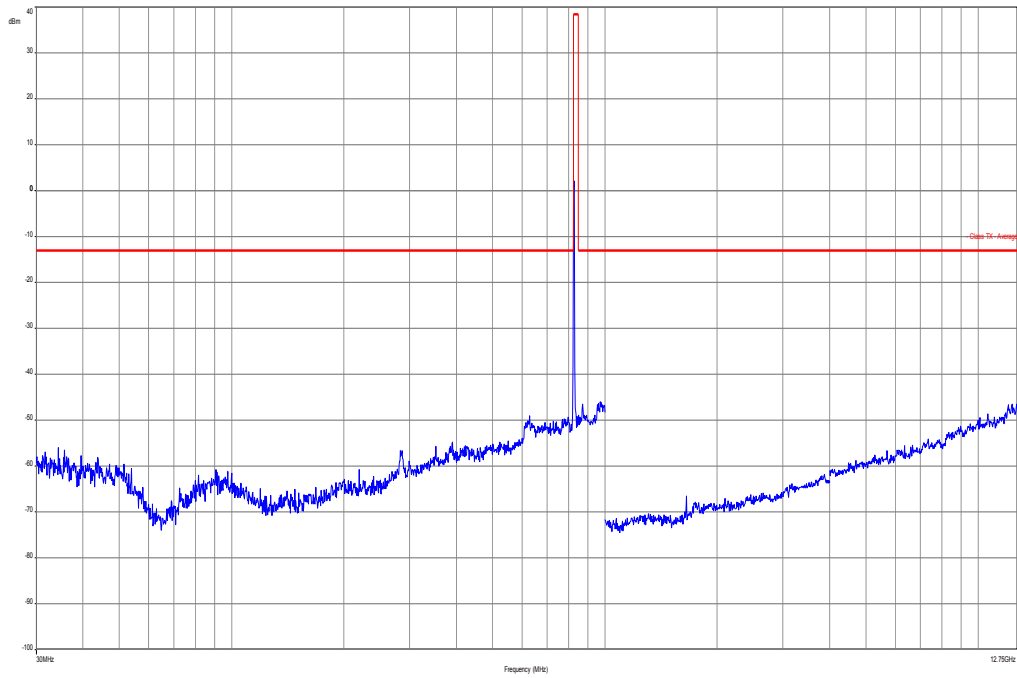


Plot 2: Channel 4132 (30 MHz – 12.75 GHz) HSUPA

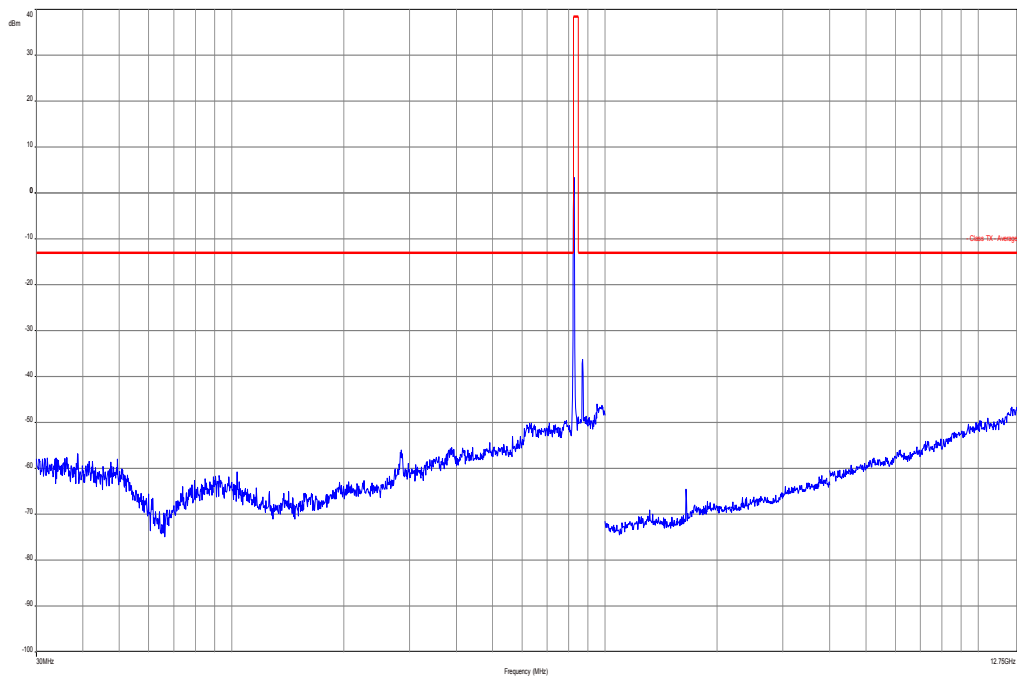


Plot 3: Channel 4132 (30 MHz – 12.75 GHz) HSPA+

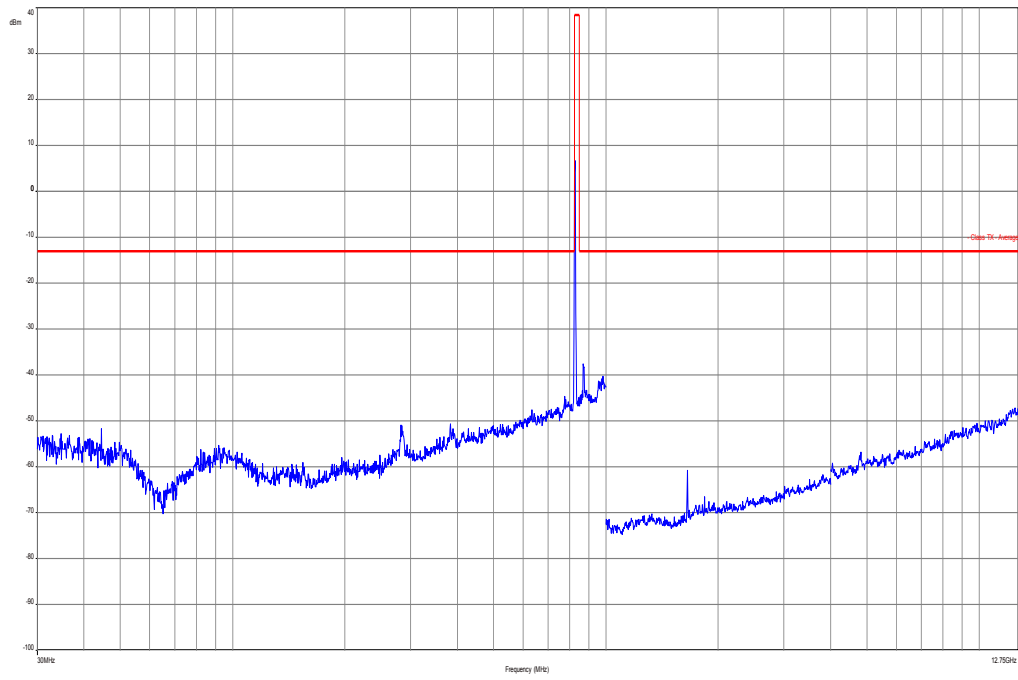


Plot 4: Channel 4180 (30 MHz – 12.75 GHz)

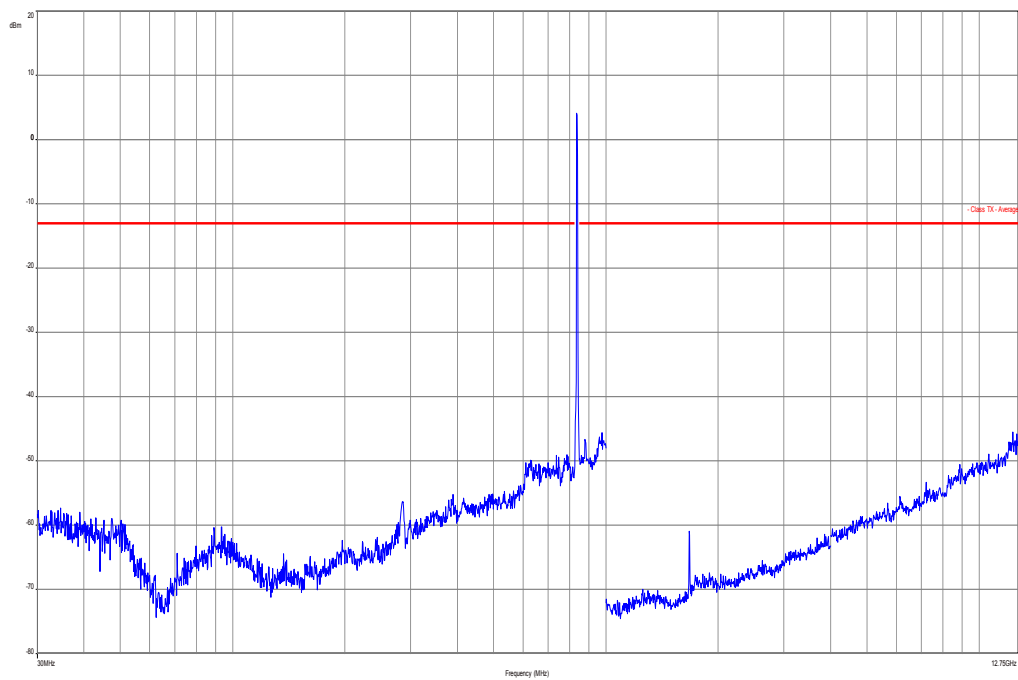


Plot 5: Channel 4180 (30 MHz – 12.75 GHz) HSUPA

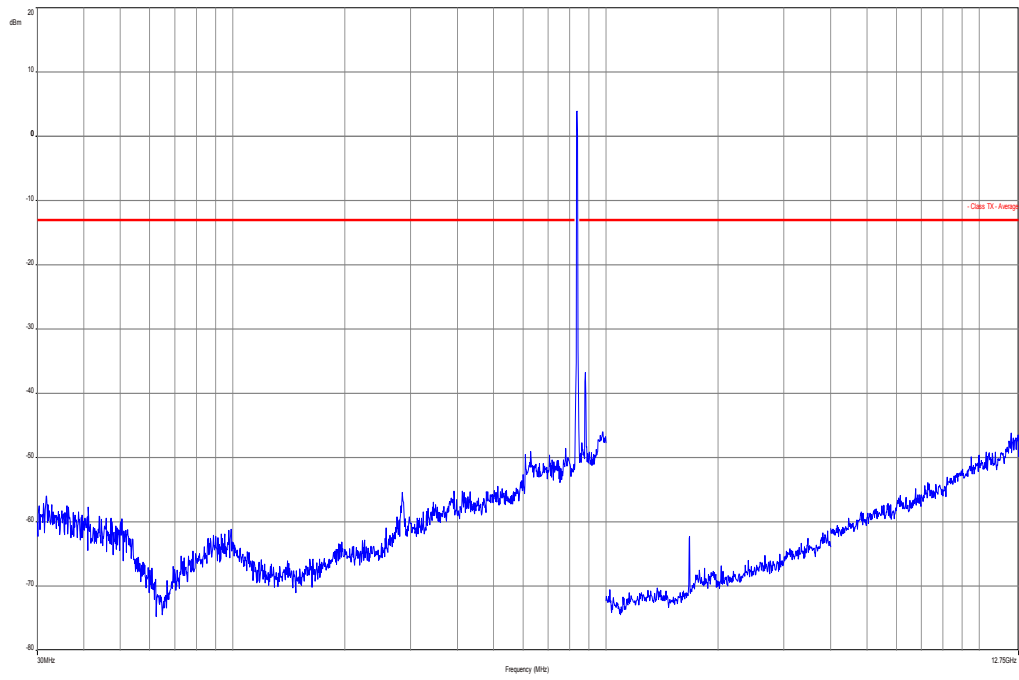


Plot 6: Channel 4180 (30 MHz – 12.75 GHz) HSPA+

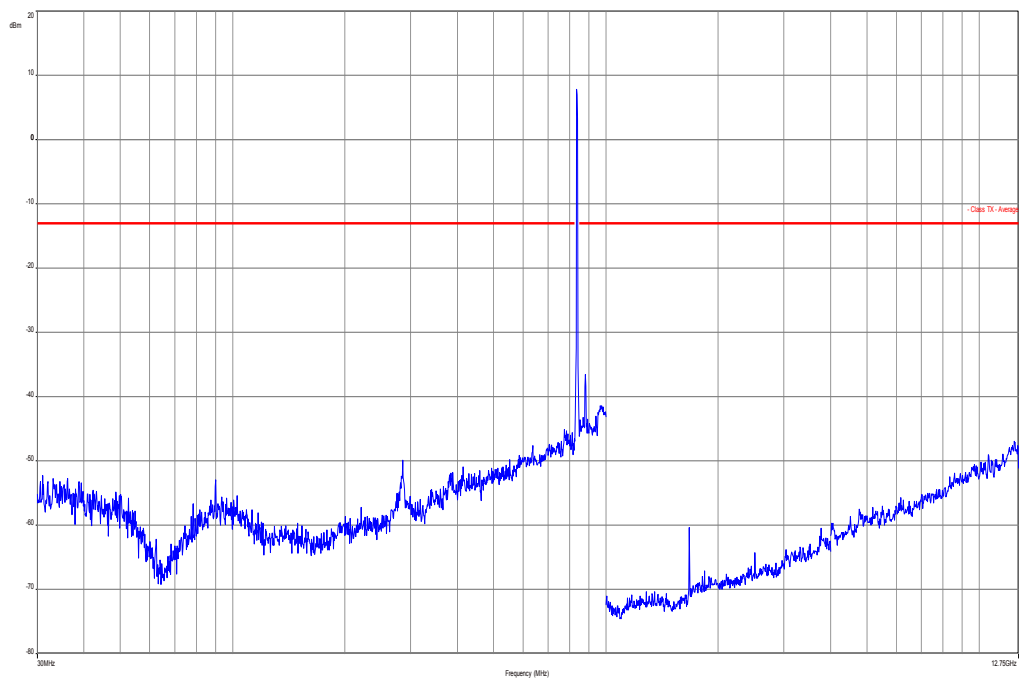


Plot 7: Channel 4233 (30 MHz – 12.75 GHz)

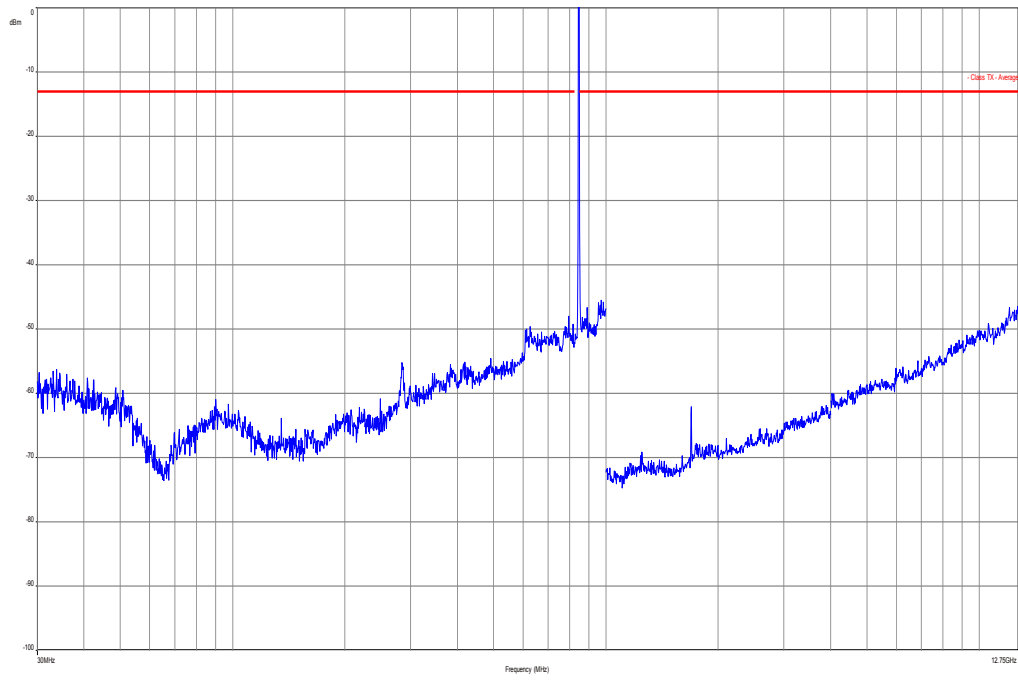

Plot 8: Channel 4233 (30 MHz – 12.75 GHz) HSUPA

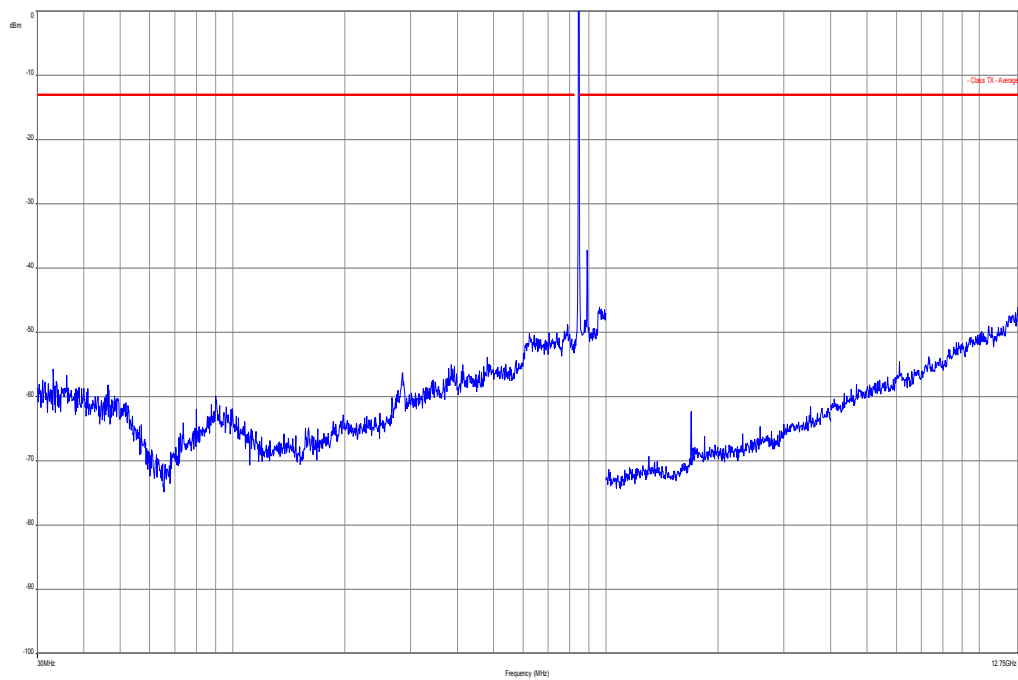

Plot 9: Channel 4233 (30 MHz – 12.75 GHz) HSPA+

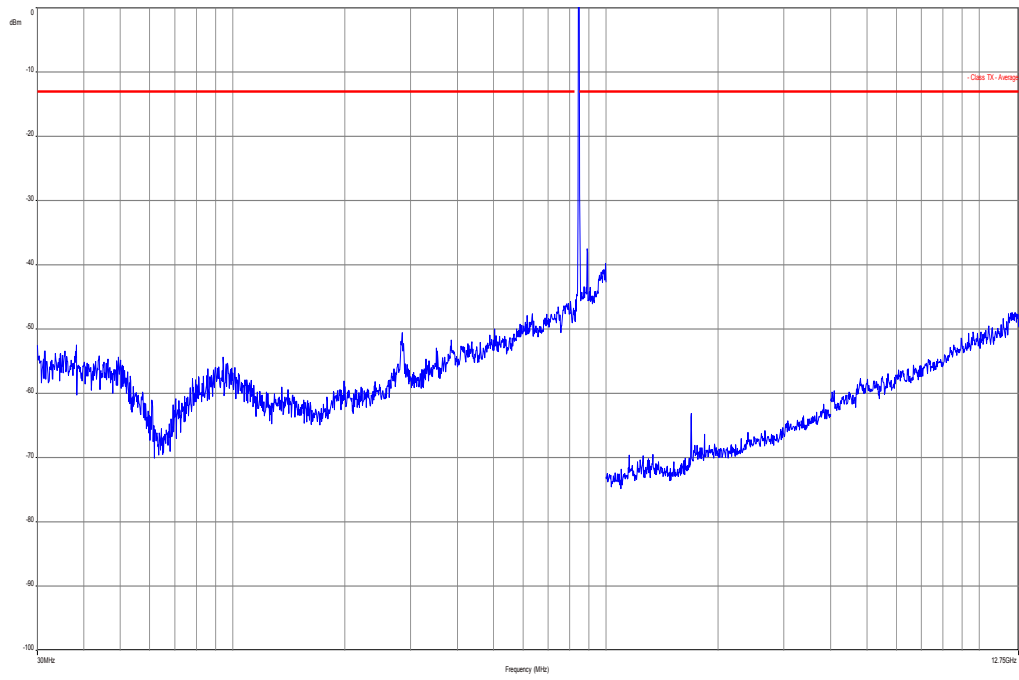

8.5.4 Spurious emissions conducted

Not performed

8.5.5 Block edge compliance

Not performed

8.5.6 Occupied bandwidth

Not performed

9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
2	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
3	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
4	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
5	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
6	9	Isolating Transformer	MPL IEC625 Bus Regeltrennt ravo	Erfi	91350	300001155	ne		
7	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
8	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
9	n. a.	Band Reject filter	WRCG185 5/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
10	n. a.	Band Reject filter	WRCG240 0/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
11	n. a.	Highpass Filter	WHKX7.0/1 8G-8SS	Wainwright	18	300003789	ne		
12	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	14.10.2011	14.10.2014
13	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	19.12.2011	19.03.2013
14	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	Ve	09.10.2012	09.10.2014

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vIKI!	Attention: extended calibration interval	*	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

10 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
1.0	Initial release	2013-03-01
-A	Editorial changes	2013-03-08

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate



Deutsche Akkreditierungsstelle GmbH
German Accreditation Body

Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV
Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition

Accreditation



The Deutsche Akkreditierungsstelle GmbH (German Accreditation Body) attests that the testing laboratory

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10
66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields:

- Wired communications and DECT
- Acoustic
- Radio
- Shirt Range Devices (SRD)
- RFID
- WiMax and Richtfunk
- Mobile radio (GSM / DCS), Over the Air (OTA) Performance
- Electromagnetic Compatibility (EMC) incl. Automotive
- Product safety
- SAR and Hearing Aid Compatibility (HAC)
- Environmental simulation
- Smart Card Terminals
- Bluetooth
- Wi-Fi-Services

The accreditation certificate shall only apply in connection with the notice of accreditation of 13.04.2011 with the accreditation number D-PL-12076-01 and is valid until 03.09.2014. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 82 pages.

Registration number of the certificate: **D-PL-12076-01-01**

Frankfurt am Main, 13.04.2011

Dipl.-Ing. (FH) Dr. Egner
Head of Division 2

This document is a translation. The definitive version is the original German accreditation certificate.
www.dakks.de

Deutsche Akkreditierungsstelle GmbH

Office Berlin
Spittelmarkt 10
10117 Berlin

Office Frankfurt am Main
Gartenstraße 6
60594 Frankfurt am Main

Office Braunschweig
Bundesallee 100
38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008; p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites:
EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.eu

Front side of certificate

Back side of certificate

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkredi_Urk_EN17025-En_incl_Annex.pdf