

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 1(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 2(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

EDGE 850

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 3(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/10/2012 1:23:14 AM

Test Laboratory: RIM Testing Services

RightHandSide_DTM850_mid_chan_amb_temp_23.5C_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.573 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 9.657 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.6690
SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.411 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.585 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

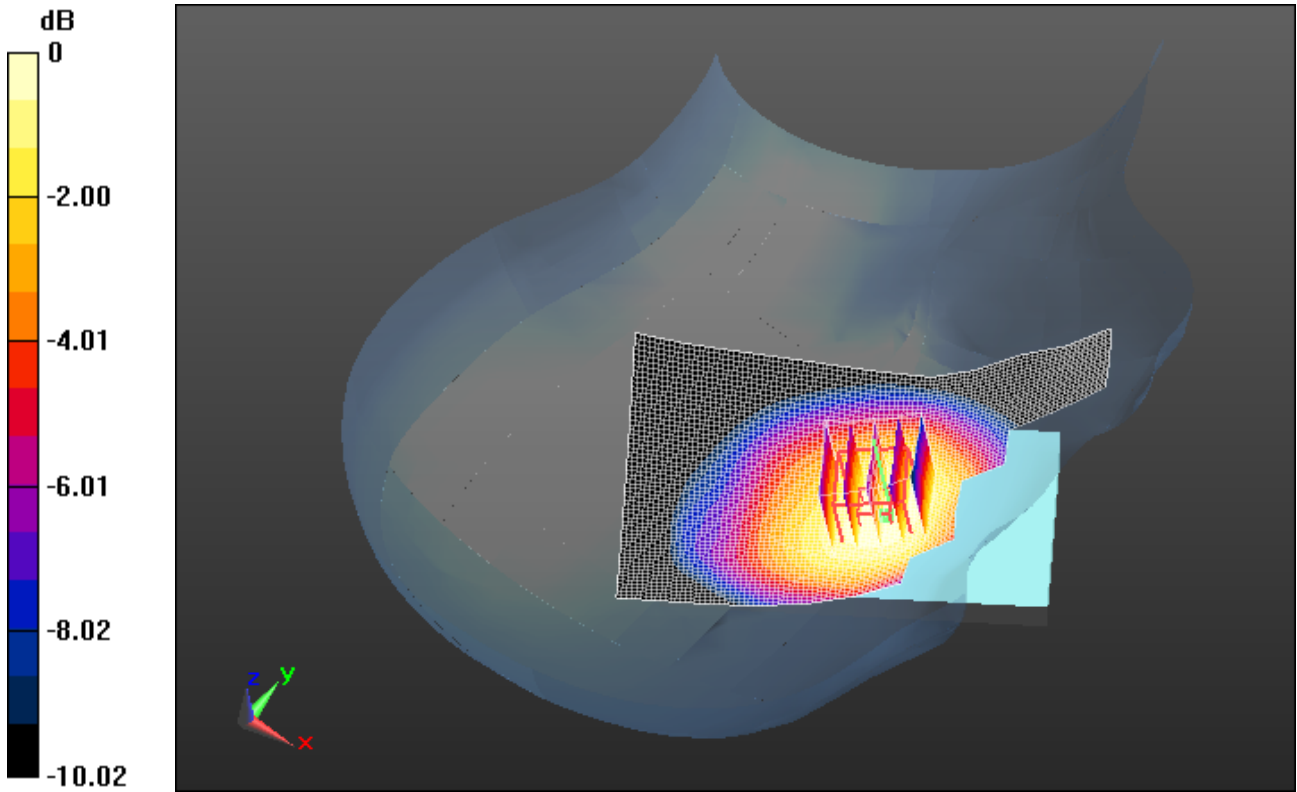

0 dB = 0.590mW/g = -4.58 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 5(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 7:14:47 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_DTM850

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/RightHandSide_Tilt_DTM850_mid_chan_amb_temp_23.1

C_liq_temp_21.7C/Area Scan (61x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Reference Value = 17.115 V/m; Power Drift = 0.40 dB

Fast SAR: SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.312 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.501 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

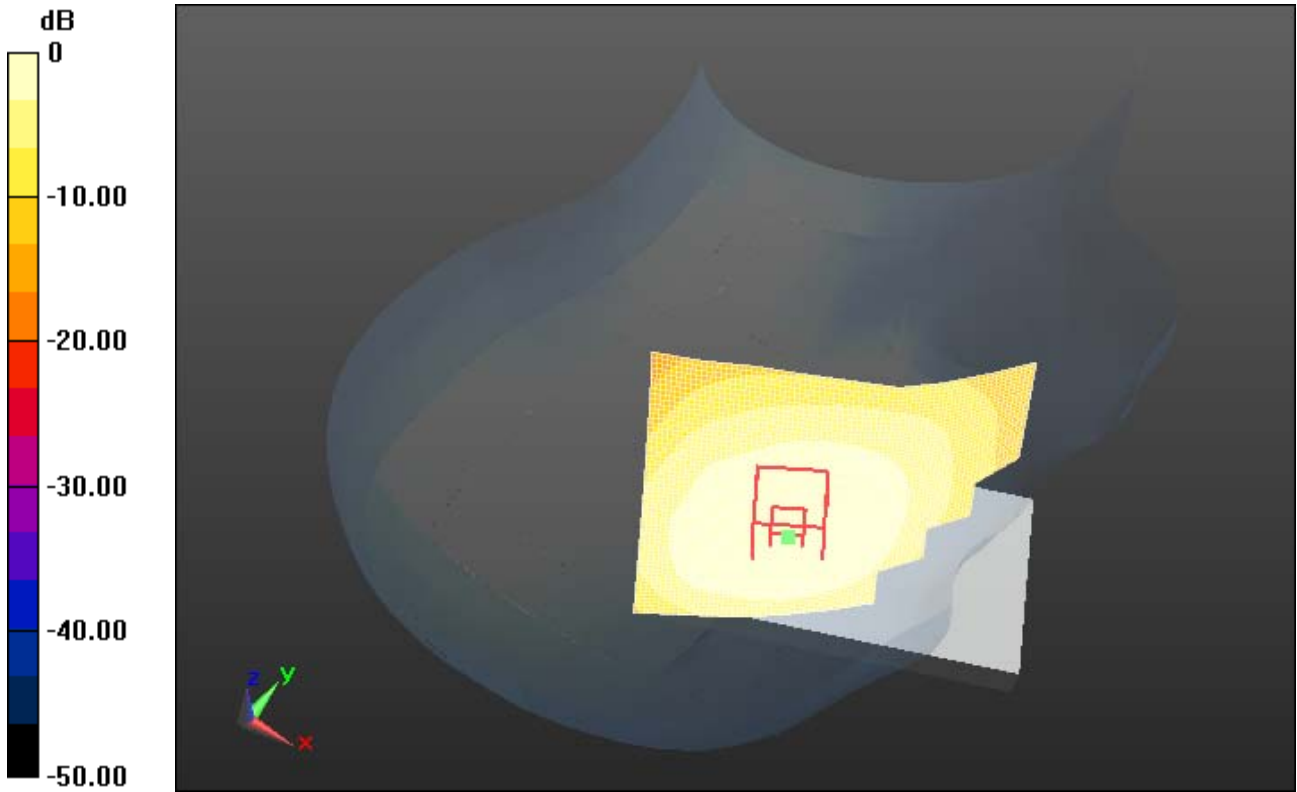

0 dB = 0.500mW/g = -6.02 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 7(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 6:38:04 AM

Test Laboratory: RIM Testing Services

RightHandSide_DTM850

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 850 (2slots), Communication System: GSM 850;
Frequency: 836.8 MHz
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/RightHandSide_DTM850_mid_chan_amb_temp_23.1C_liq_temp_21.7C/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 10.296 V/m; Power Drift = -0.14 dB
Fast SAR: SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.382 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.611 mW/g

Configuration/RightHandSide_GSM850_mid_chan_amb_temp_23.1C_liq_temp_21.7C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 9.505 V/m; Power Drift = 0.03 dB
Fast SAR: SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.344 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.549 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

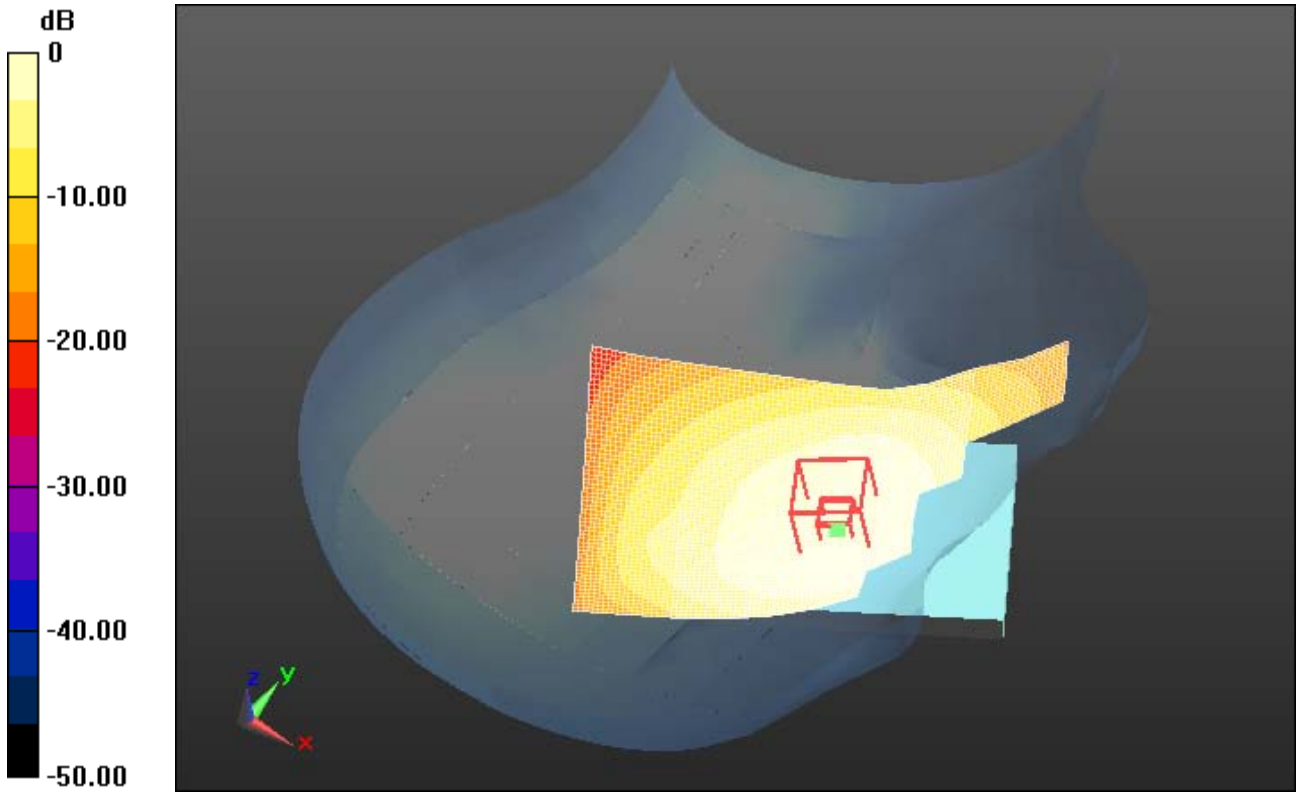

0 dB = 0.550mW/g = -5.19 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 9(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 5:23:30 AM

Test Laboratory: RIM Testing Services

LeftHandSide_DTM850

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 850 (2slots), Communication System: EDGE 850 (3 slots), Communication System: EDGE 850 (4 slots), Communication System: GSM 850; Frequency: 824.2 MHz, Frequency: 836.8 MHz, Frequency: 848.8 MHz
Medium parameters used: $f = 825$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 40.257$; $\rho = 1000$ kg/m³,
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³,
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 39.967$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/LeftHandSide_DTM850_low_chan_amb_temp_23.2C_liq_t

emp_21.5C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 11.700 V/m; Power Drift = -0.12 dB

Fast SAR: SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.512 mW/g

Maximum value of SAR (interpolated) = 0.866 mW/g

Configuration/LeftHandSide_DTM850_mid_chan_amb_temp_23.2C_liq_t


emp_21.5C/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 11.424 V/m; Power Drift = 0.11 dB

Fast SAR: SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.532 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.907 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 10(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Configuration/LeftHandSide_DTM850_mid_chan_amb_temp_23.2C_liq_temp_21.5C/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.424 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.0630
SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.564 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (measured) = 0.906 mW/g

Configuration/LeftHandSide_DTM850_high_chan_amb_temp_23.2C_liq_temp_21.5C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 10.825 V/m; Power Drift = -0.05 dB
Fast SAR: SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.462 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (interpolated) = 0.778 mW/g


Configuration/LeftHandSide_DTM850_3-Slots_mid_chan_amb_temp_23.2C_liq_temp_21.5C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 11.643 V/m; Power Drift = -0.17 dB
Fast SAR: SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.520 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (interpolated) = 0.873 mW/g

Configuration/LeftHandSide_DTM850_4-Slots_mid_chan_amb_temp_23.2C_liq_temp_21.5C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 10.919 V/m; Power Drift = -0.10 dB
Fast SAR: SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.473 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (interpolated) = 0.790 mW/g

Configuration/LeftHandSide_GSM850_mid_chan_amb_temp_23.2C_liq_temp_21.5C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 10.035 V/m; Power Drift = 0.11 dB
Fast SAR: SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.447 mW/g


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 11(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.756 mW/g

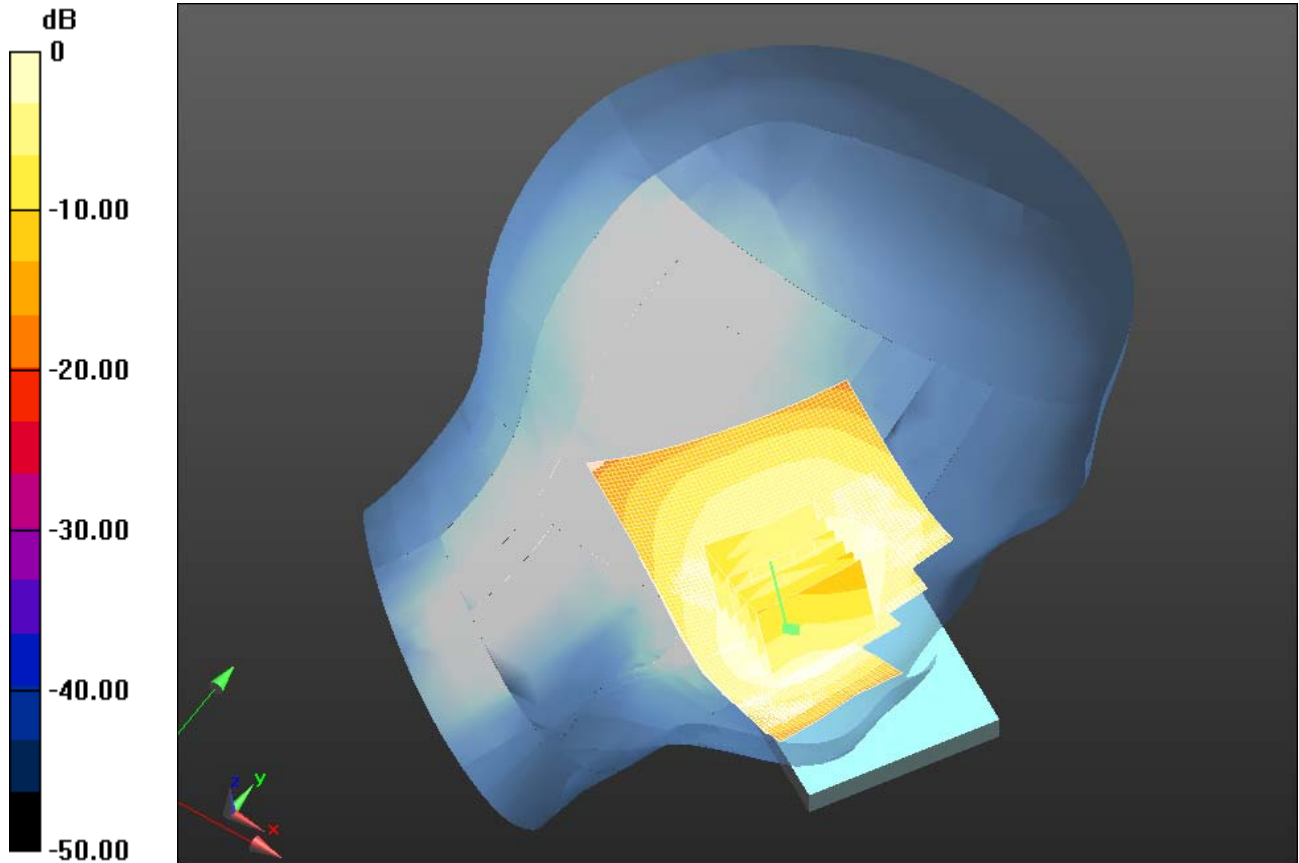

0 dB = 0.760mW/g = -2.38 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 12(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 3:59:23 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_DTM850

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/LeftHandSide_Tilt_DTM850_mid_chan_amb_temp_23.2C_liq_temp_21.5C/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 19.098 V/m; Power Drift = -0.04 dB
Fast SAR: SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.302 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.486 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

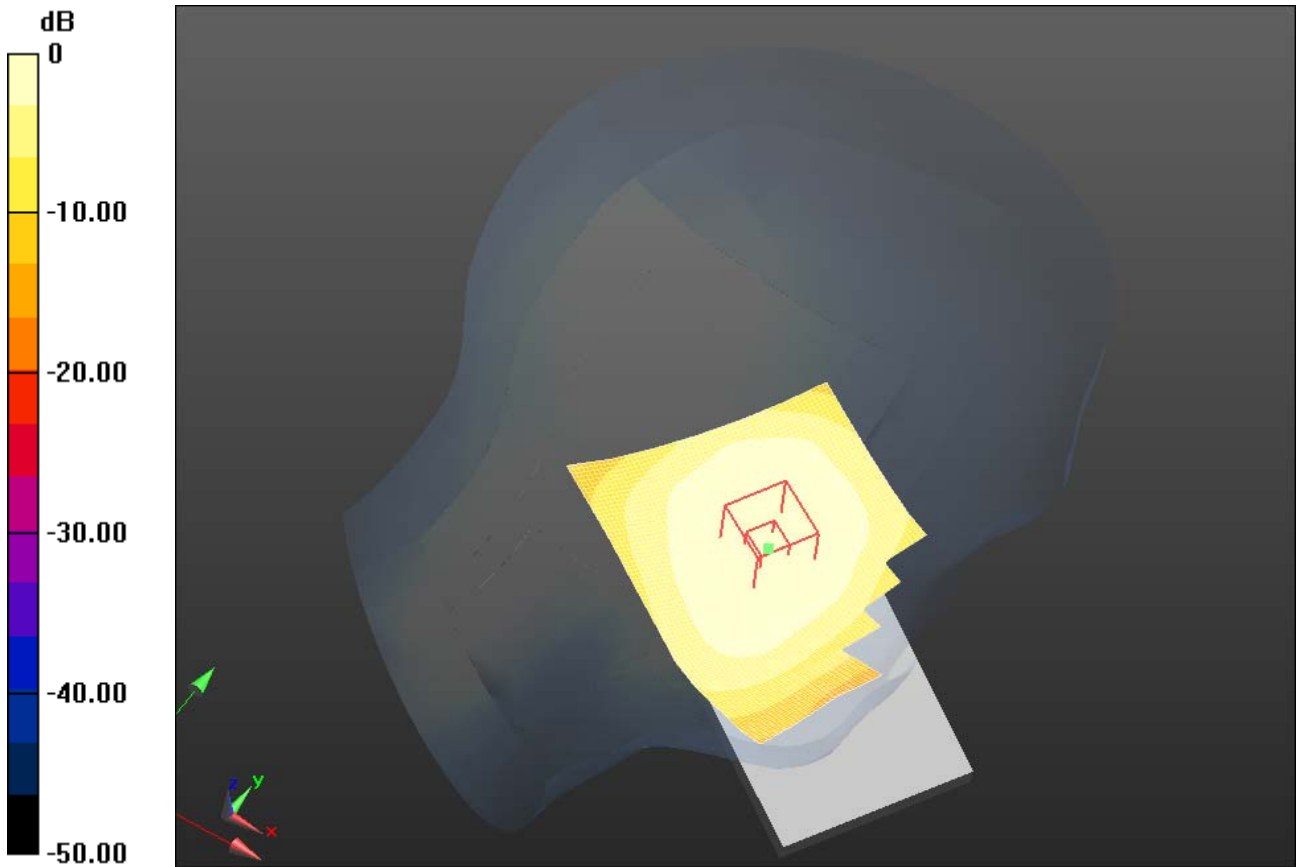

0 dB = 0.490mW/g = -6.20 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 14(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 2:51:24 PM

Test Laboratory: RIM Testing Services

LeftHandSide_DTM850_2100mA_battery

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 850 (2slots); Communication System Band: EDGE 850;
Frequency: 836.8 MHz; Communication System PAR: 6.232 dB; PMF: 2.04927

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

**Configuration/LeftHandSide_DTM850_mid_chan_amb_temp_23.5C_liq_t
emp_21.3C_2100mA_batt/Area Scan (61x61x1):** Measurement grid: dx=15mm,
dy=15mm

Reference Value = 11.093 V/m; Power Drift = -0.14 dB

Fast SAR: SAR(1 g) = 0.720 mW/g; SAR(10 g) = 0.495 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.820 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW


IC
2503A-RFN80UW

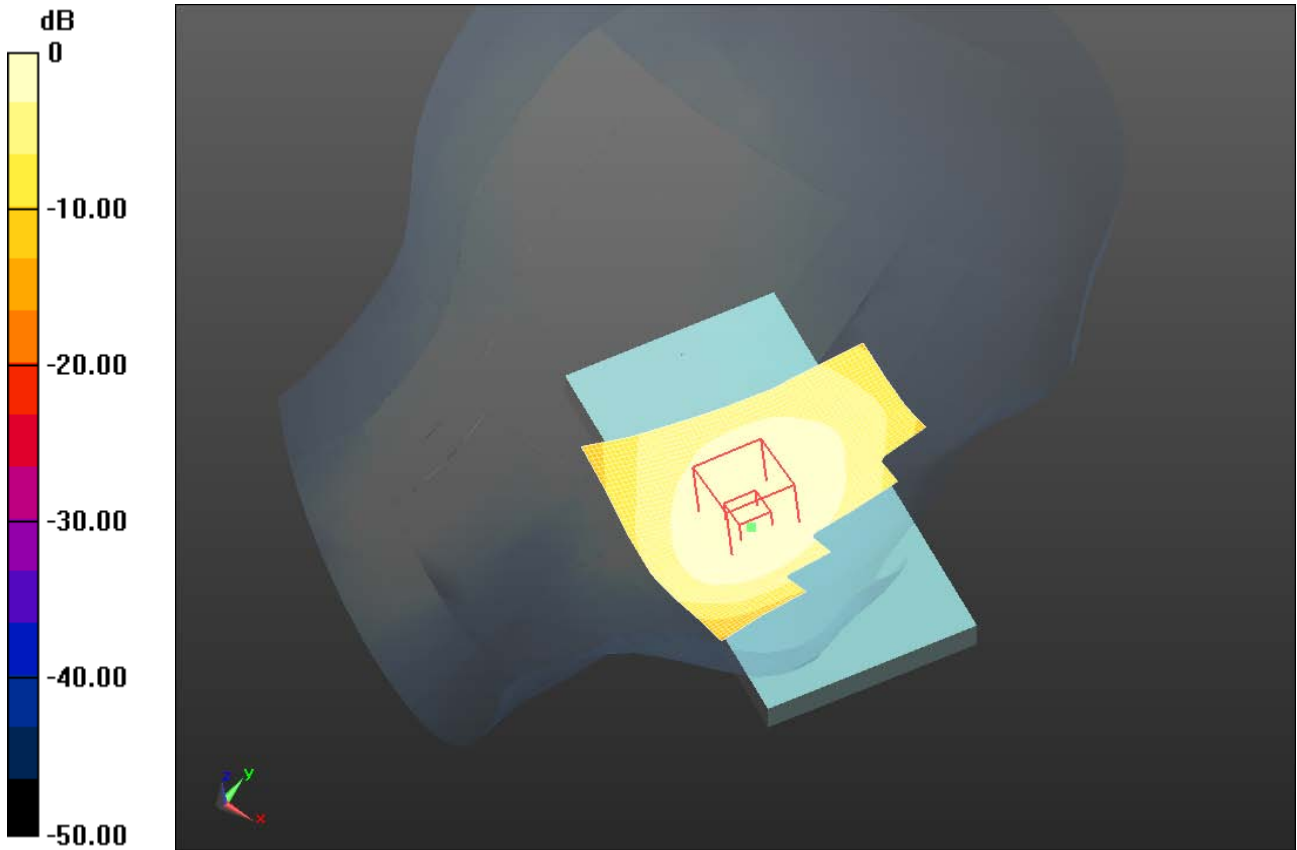

0 dB = 0.820mW/g = -1.72 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 16(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

UMTS Band V

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 17(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/9/2012 10:52:05 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_Band_V_mid_chan_amb_temp_23.6C_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.118$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Reference Value = 9.588 V/m; Power Drift = 0.22 dB

Fast SAR: SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.434 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.708 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

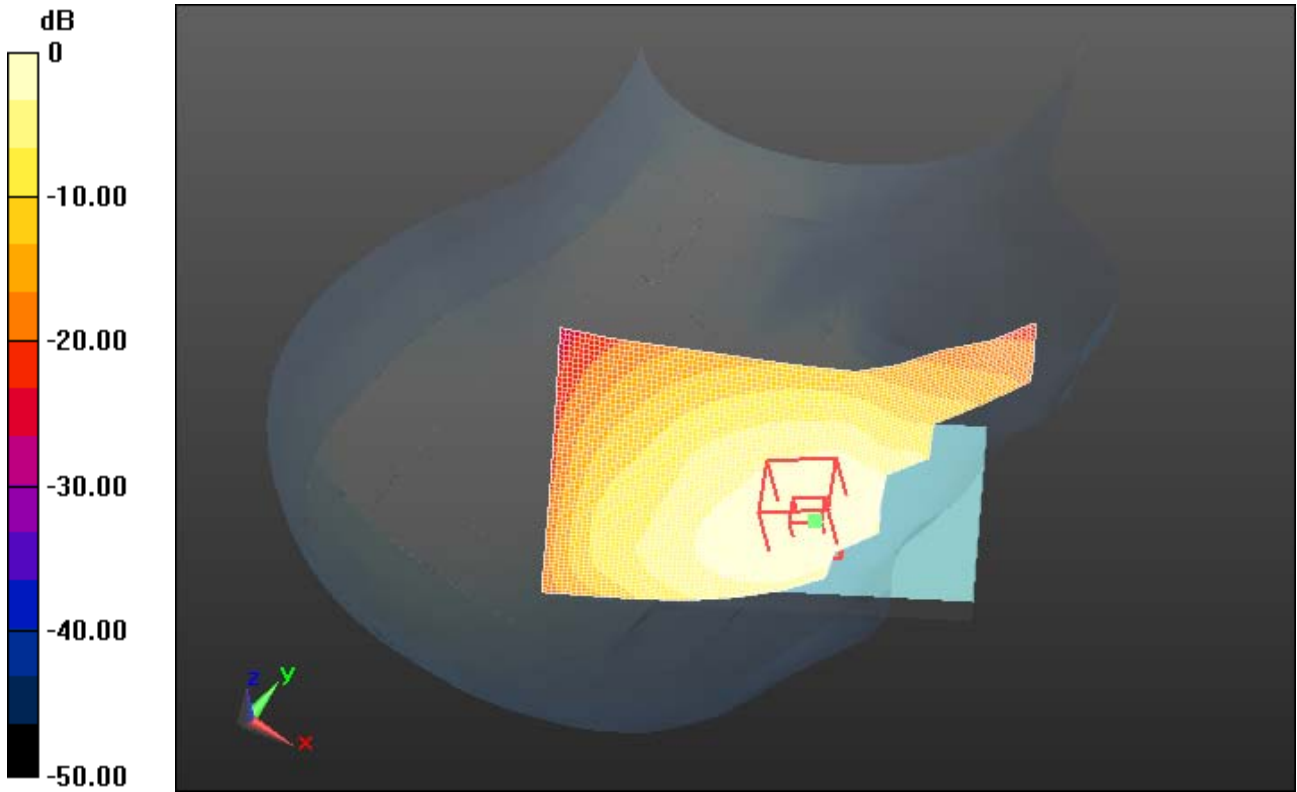

0 dB = 0.710mW/g = -2.97 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 19(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 8:06:42 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_Band_V

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.118$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/RightHandSide_Tilt_UMTS_Band_V_mid_chan_amb_tem p_23.2C_liq_temp_21.7C/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 18.552 V/m; Power Drift = -0.07 dB

Fast SAR: SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.319 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.504 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

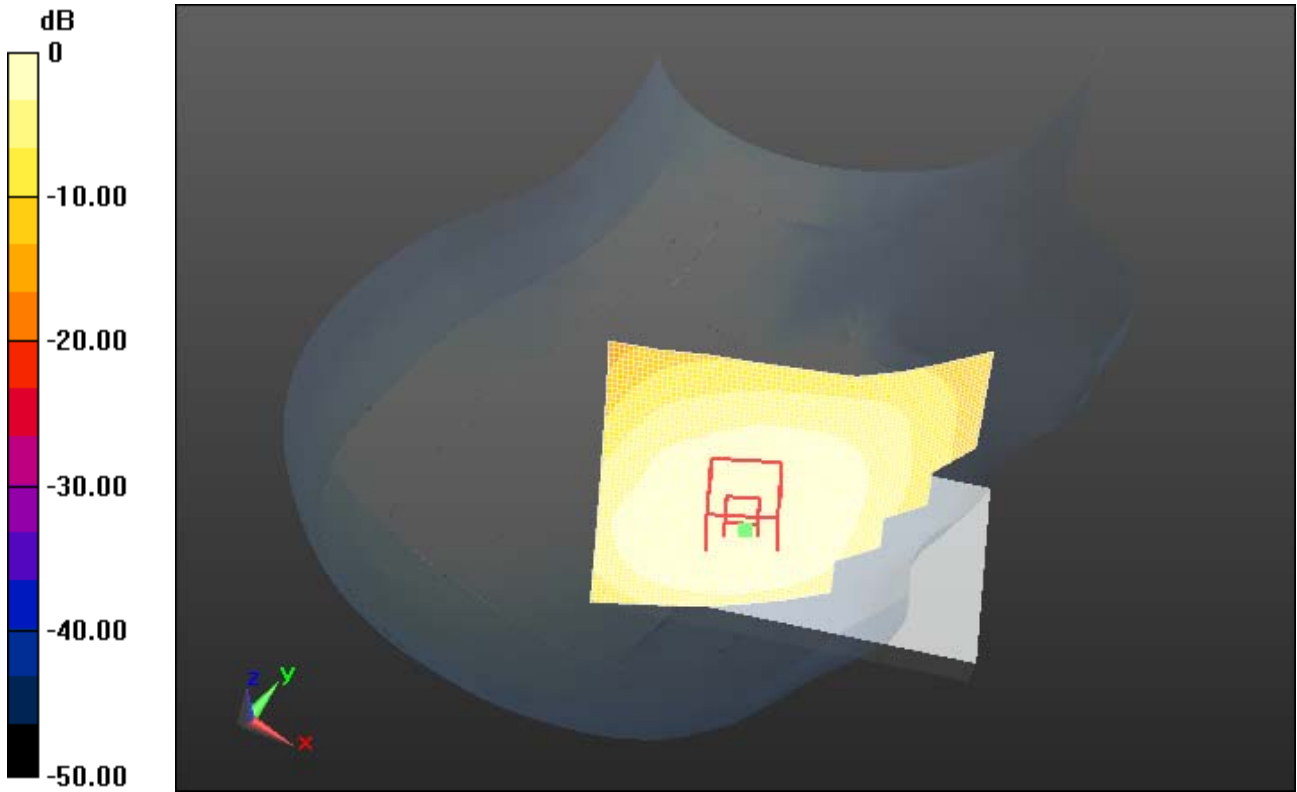

0 dB = 0.500mW/g = -6.02 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 21(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 11:45:44 AM

Test Laboratory: RIM Testing Services

Head_SAR_UMTS_Band_V_Left_Touch

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD V; Communication System Band: UMTS band V; Frequency: 836.4 MHz, Frequency: 826.4 MHz, Frequency: 846.6

MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.118$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.879$

mho/m; $\epsilon_r = 40.243$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 846.6$

MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 39.973$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
 - Modulation Compensation:
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/LeftHandSide_UMTS_Band_V_mid_chan_amb_temp_23.1

C_liq_temp_21.7C/Area Scan (61x81x1): Measurement grid: dx=15mm,

dy=15mm

Reference Value = 13.294 V/m; Power Drift = -0.13 dB

Fast SAR: SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.573 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.946 mW/g

Configuration/LeftHandSide_UMTS_Band_V_low_chan_amb_temp_23.1

C_liq_temp_21.7C 2/Area Scan (61x61x1): Measurement grid: dx=15mm,

dy=15mm

Reference Value = 13.107 V/m; Power Drift = -0.13 dB

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 22(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Fast SAR: SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.540 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.892 mW/g

Configuration/LeftHandSide_UMTS_Band_V_high_chan_amb_temp_23.0

C_liq_temp_21.5C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.163 V/m; Power Drift = 0.0042 dB

Fast SAR: SAR(1 g) = 0.858 mW/g; SAR(10 g) = 0.589 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.980 mW/g

Configuration/LeftHandSide_UMTS_Band_V_high_chan_amb_temp_23.0

C_liq_temp_21.5C/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.163 V/m; Power Drift = 0.0042 dB

Peak SAR (extrapolated) = 1.1700

SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.652 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.995 mW/g

Configuration/LeftHandSide_UMTS_Band_V_high_chan_amb_temp_23.0

C_liq_temp_21.4C_repeat/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 12.982 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.582 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.965 mW/g

Configuration/LeftHandSide_UMTS_Band_V_high_chan_amb_temp_23.1


C_liq_temp_21.7C_2100mA_battery/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm


Reference Value = 12.453 V/m; Power Drift = -0.01 dB

Fast SAR: SAR(1 g) = 0.835 mW/g; SAR(10 g) = 0.574 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.954 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 23(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

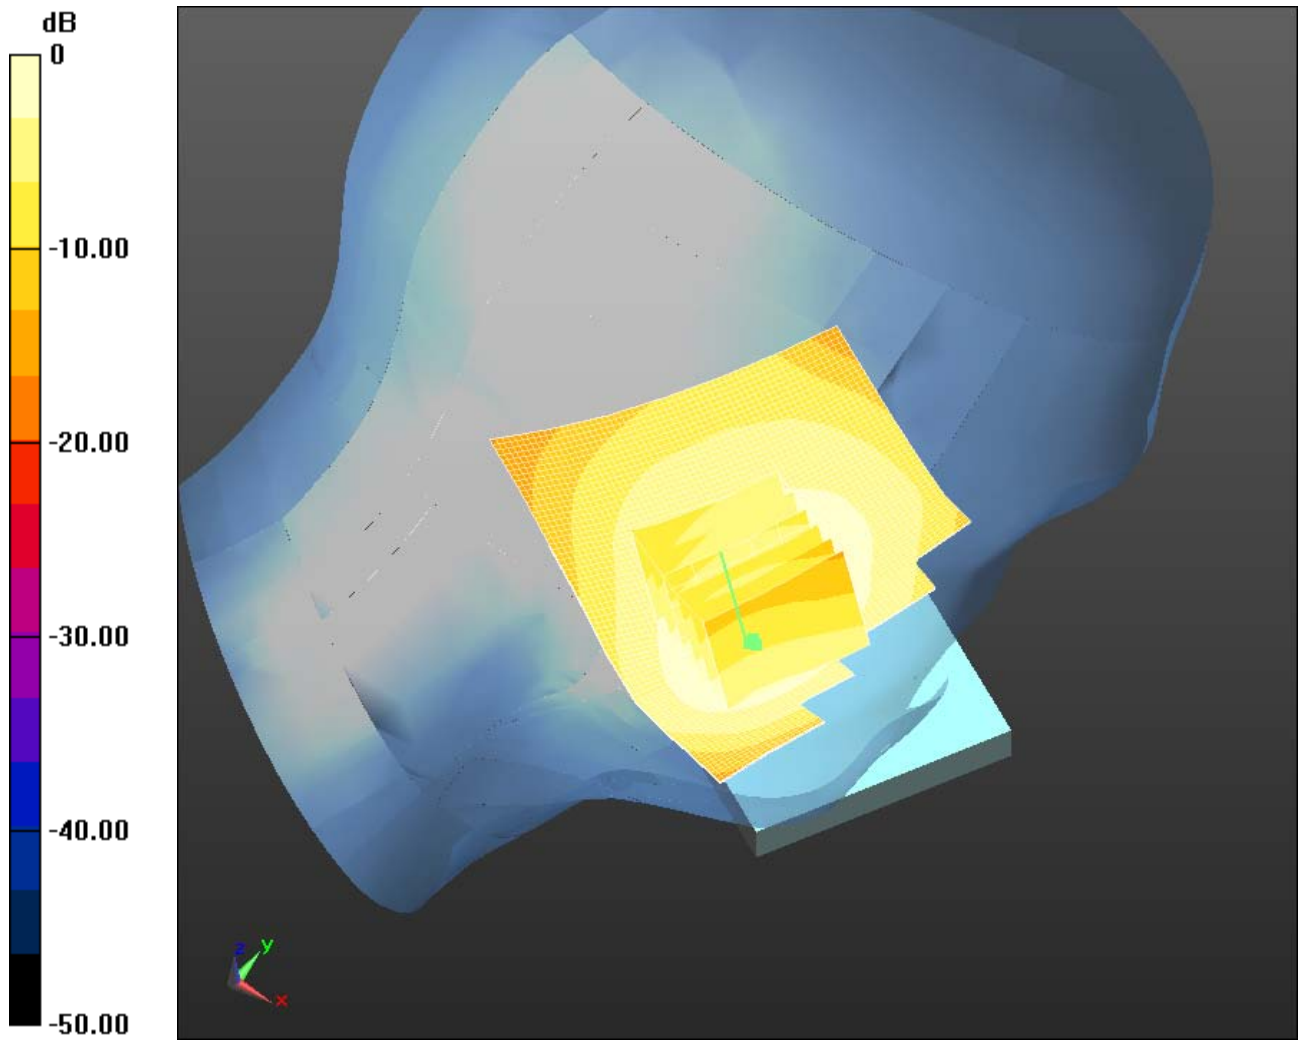

0 dB = 0.950mW/g = -0.45 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 24(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 12/11/2012 12:36:20 PM

Test Laboratory: RIM Testing Services

Head_SAR_UMTS_Band_V_Left_Tilt

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD V; Communication System Band: UMTS band V; Frequency: 836.4 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.118$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.06, 6.06, 6.06); Calibrated: 1/11/2012
 - Modulation Compensation:
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/LeftHandSide_Tilt_UMTS_Band_V_mid_chan_amb_temp_23.0C_liq_temp_21.C 2/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 18.461 V/m; Power Drift = 0.04 dB

Fast SAR: SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.287 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.458 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW


IC
2503A-RFN80UW

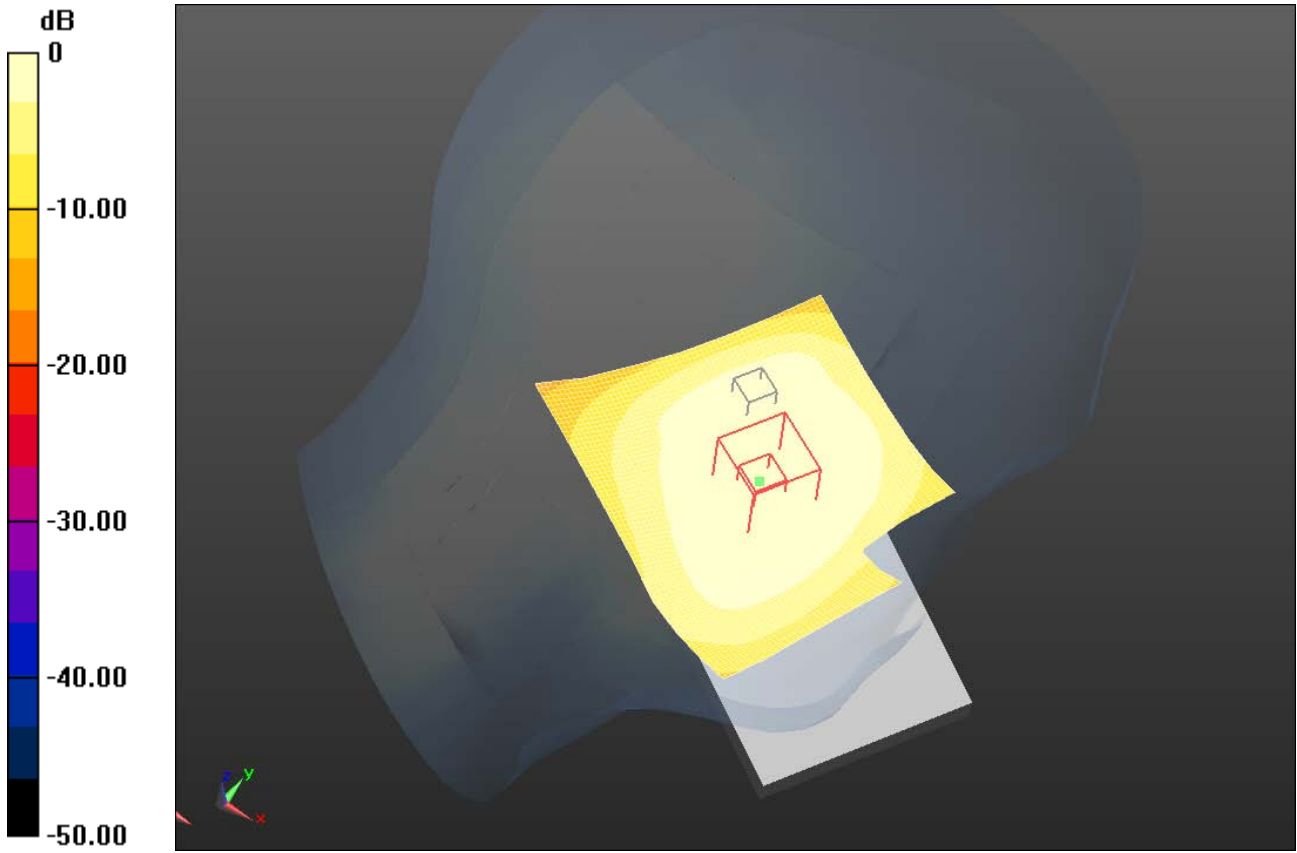

0 dB = 0.460mW/g = -6.74 dB mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			26(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 26, 2012- Feb 28, 2013	RTS-6026-1302-18	L6ARFN80UW	2503A-RFN80UW

EDGE 1900

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 27(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/27/2012 11:29:48 PM

Test Laboratory: RIM Testing Services

RightHandSide_DTM1900_mid_chan_amb_temp_24.1C_liq_temp_22.6

C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ mho/m; $\epsilon_r = 39.055$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.709 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.623 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.8800

SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.370 mW/g

Maximum value of SAR (measured) = 0.683 mW/g

Configuration/Touch position -/Zoom Scan 2 (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.623 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.6880

SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.522 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

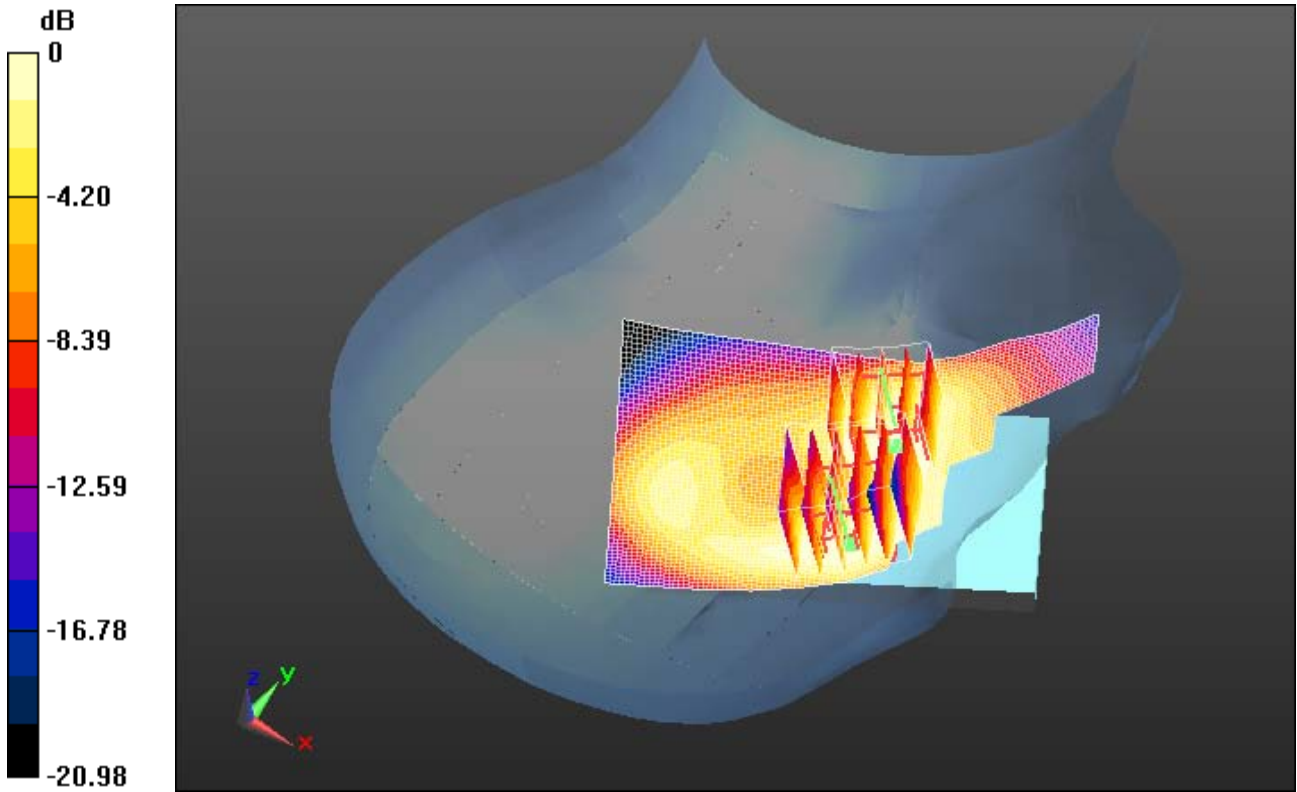

0 dB = 0.520mW/g = -5.68 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 29(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 12:00:13 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_DTM1900_mid_chan_amb_temp_24.1C_liq_temp_2 2.6C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ mho/m; $\epsilon_r = 39.055$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.537 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.456 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.6760

SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.509 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

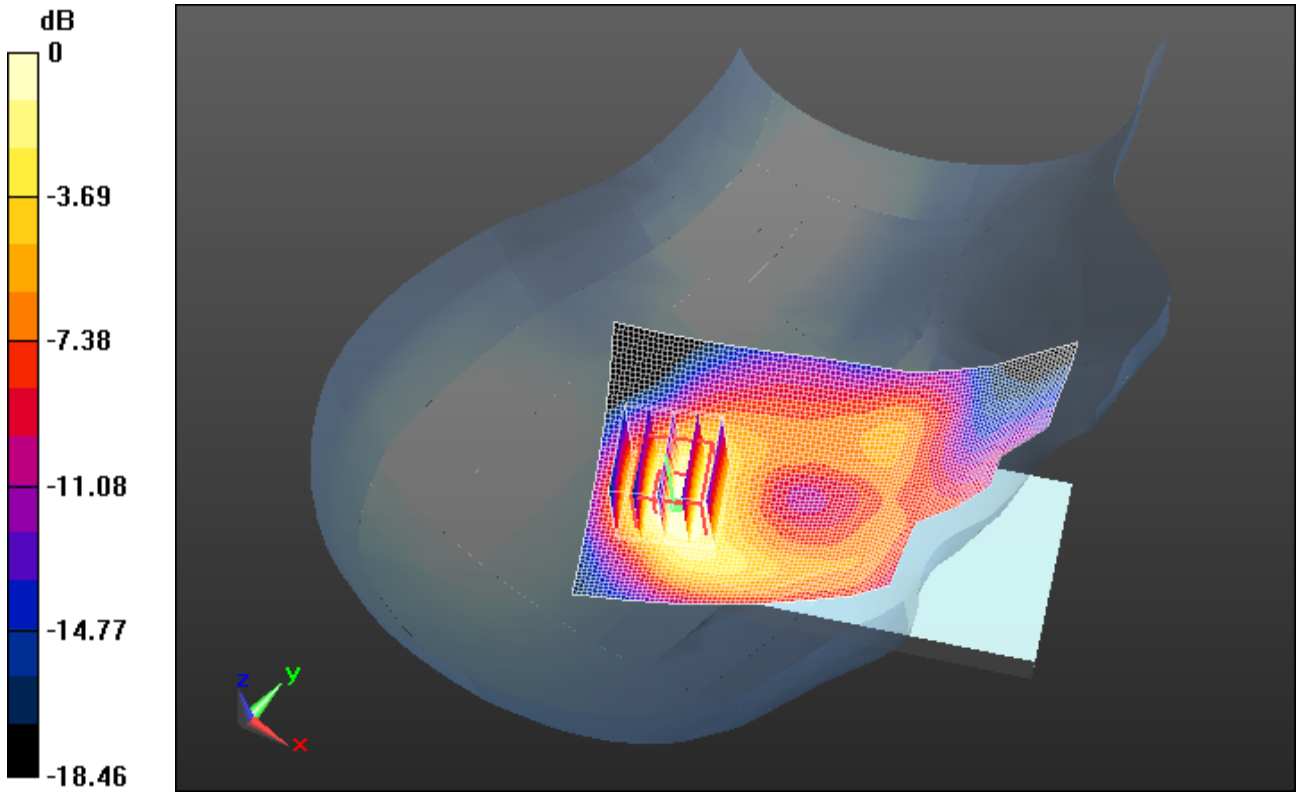

0 dB = 0.510mW/g = -5.85 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 31(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 12:43:15 AM

Test Laboratory: RIM Testing Services

RightHandSide_GSM1900_mid_chan_amb_temp_24.5C_liq_temp_22.6

C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: GSM 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ mho/m; $\epsilon_r = 39.055$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.436 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.366 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.5310

SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.426 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

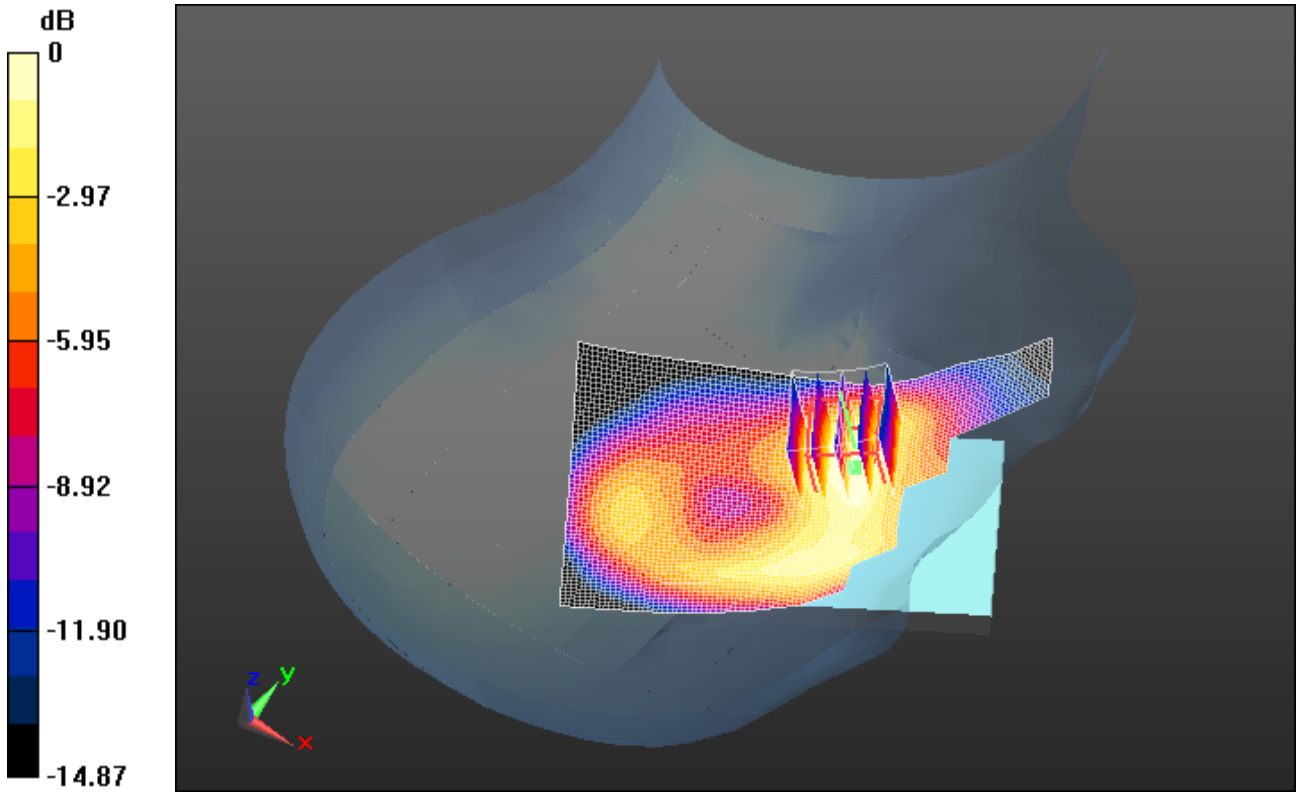

0 dB = 0.430mW/g = -7.33 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 33(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 10:08:01 AM

Test Laboratory: RIM Testing Services

LeftHandSide_DTM1900_low_chan_amb_temp_25.0C_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900; Frequency: 1850.2 MHz
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.339$ mho/m; $\epsilon_r = 38.703$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.146 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 15.260 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.5190
SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.539 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.127 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

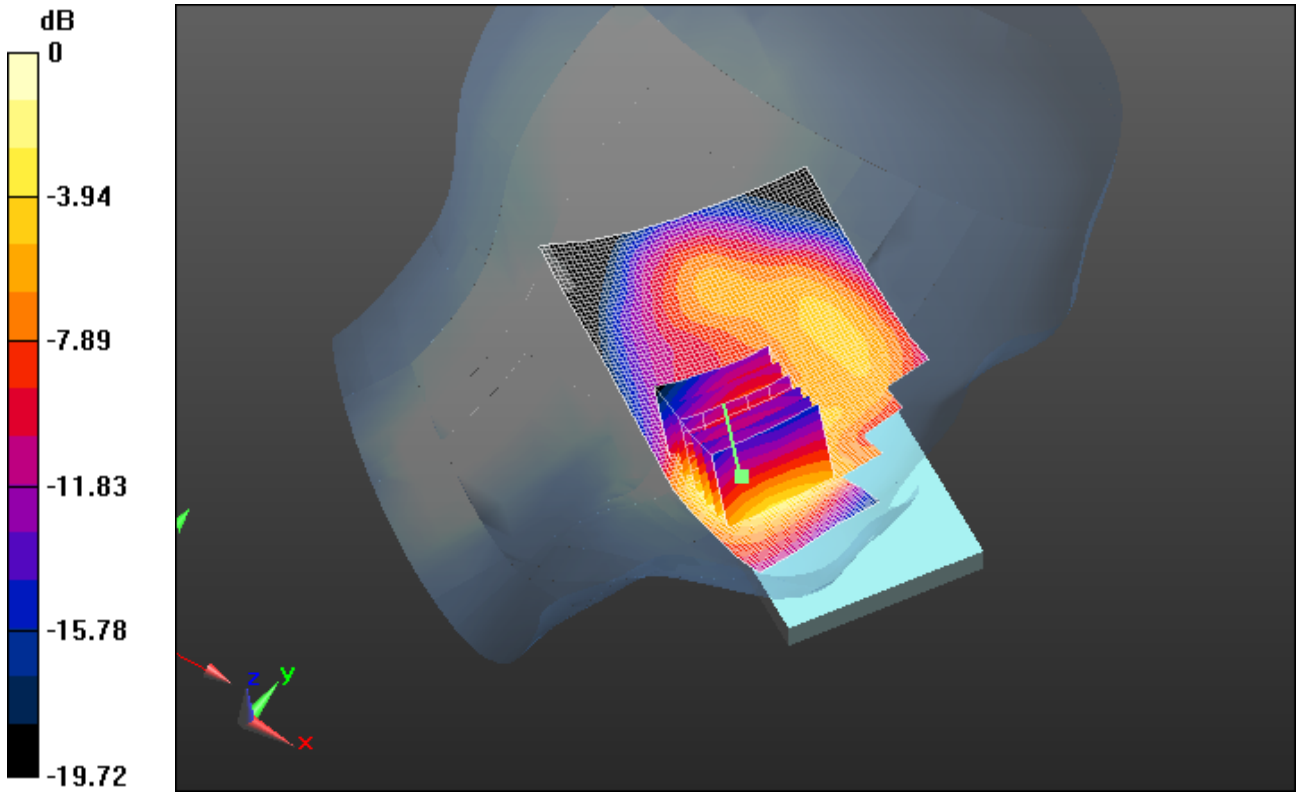

0 dB = 1.130mW/g = 1.06 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 35(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/29/2012 1:52:33 AM

Test Laboratory: RIM Testing Services

LeftHandSide_DTM1900_low_chan_2nd

Scan_amb_temp_24.4C_liq_temp_21.5C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900; Frequency: 1850.2 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.339$ mho/m; $\epsilon_r = 38.703$;
 $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.126 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.163 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.4980

SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.525 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.105 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

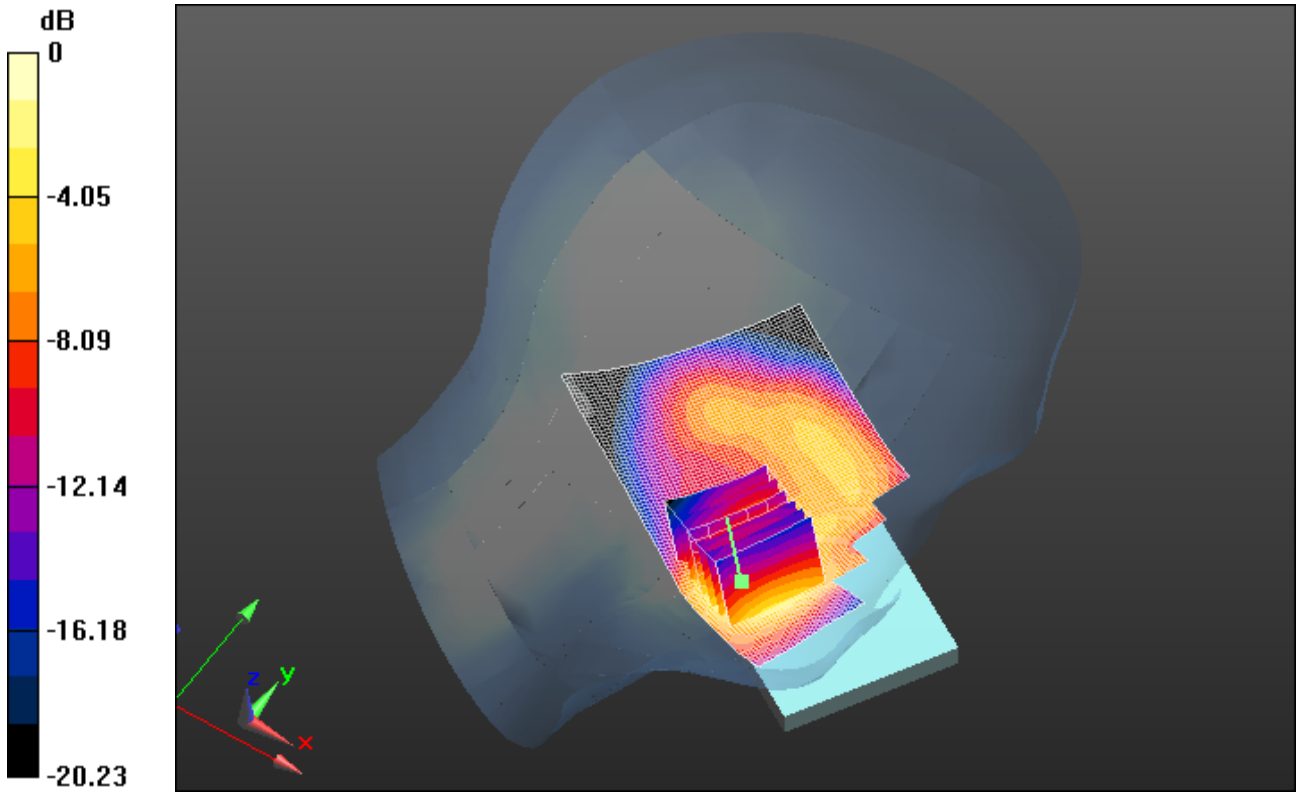

0 dB = 1.100mW/g = 0.83 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 37(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 9:46:58 AM

Test Laboratory: RIM Testing Services

LeftHandSide_DTM1900_mid_chan_amb_temp_25.0C_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 38.569$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.015 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.014 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.4160

SAR(1 g) = 0.831 mW/g; SAR(10 g) = 0.477 mW/g

Maximum value of SAR (measured) = 1.017 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

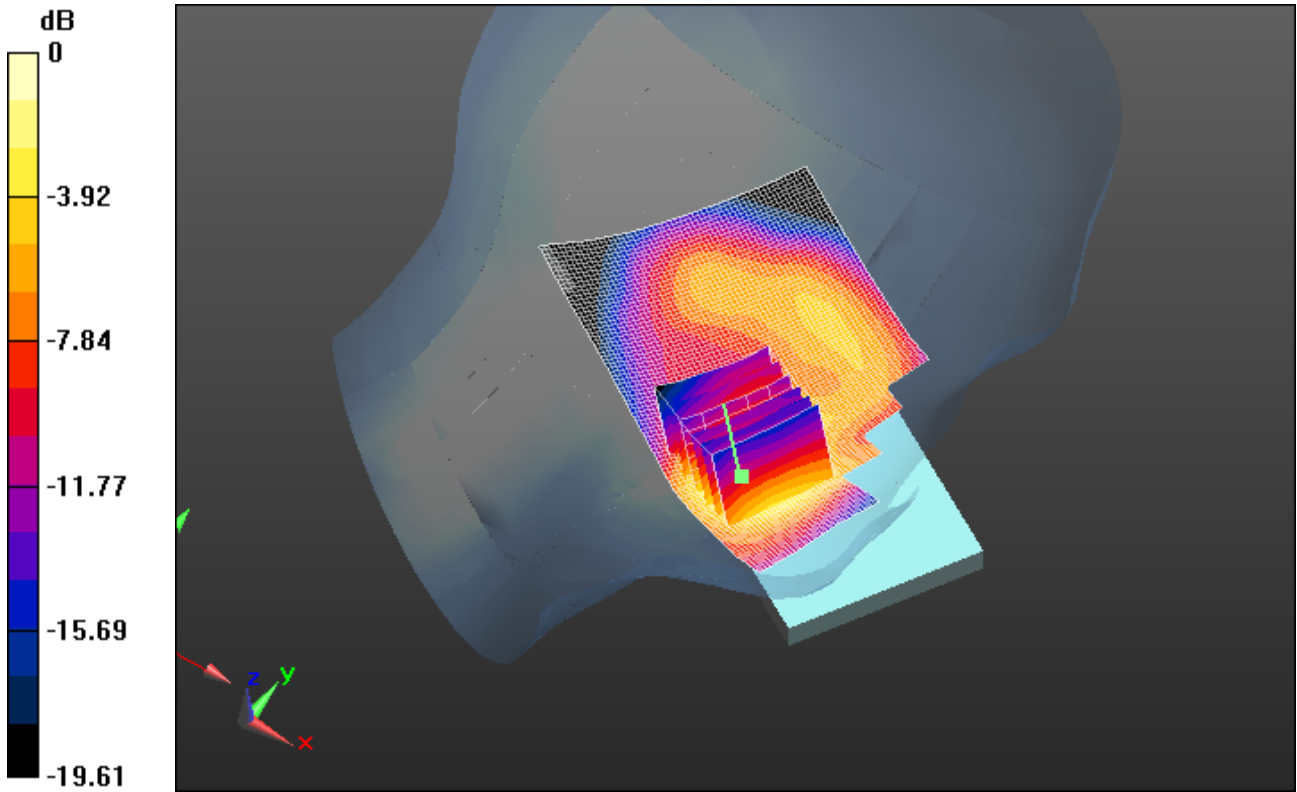

0 dB = 1.020mW/g = 0.17 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 39(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 10:28:44 AM

Test Laboratory: RIM Testing Services

LeftHandSide_DTM1900_high_chan_amb_temp_25.0C_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.397$ mho/m; $\epsilon_r = 38.413$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.846 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.115 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.2120

SAR(1 g) = 0.693 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 0.851 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

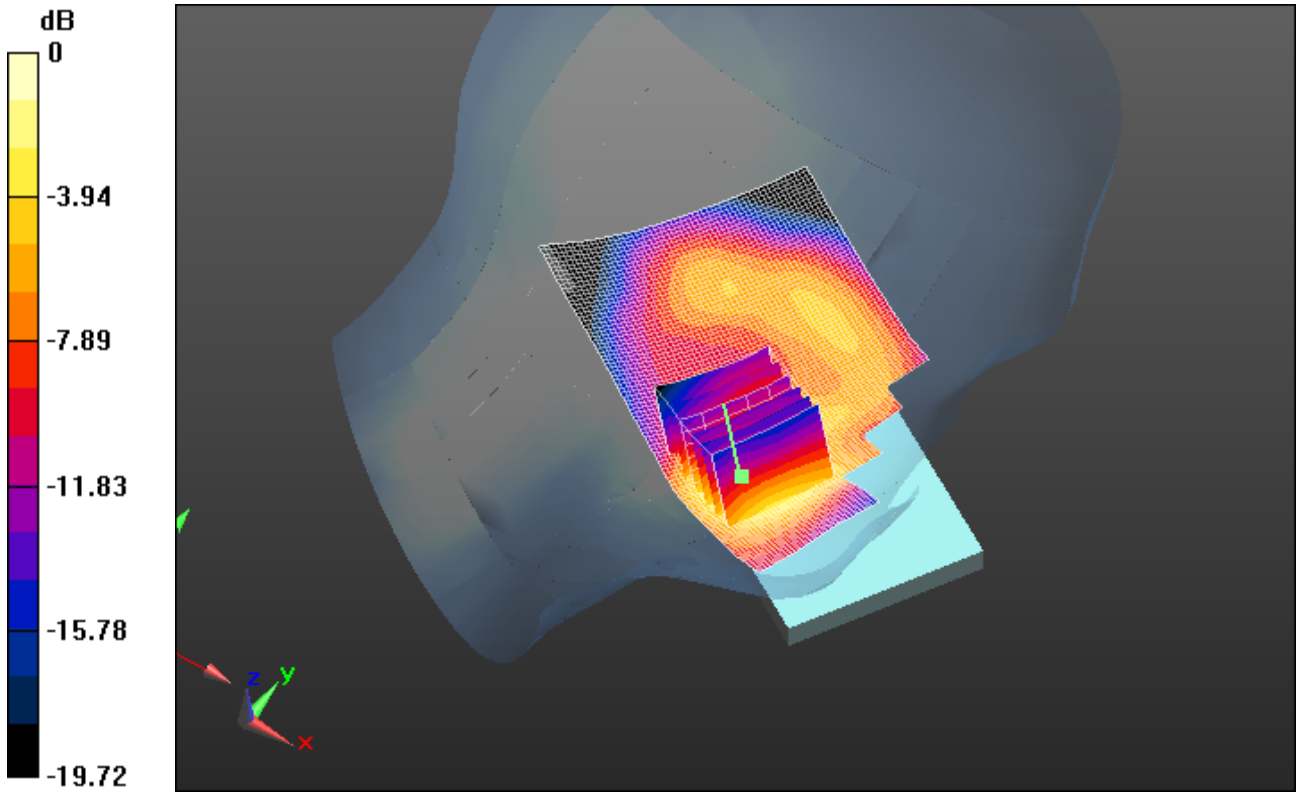

0 dB = 0.850mW/g = -1.41 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 41(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 11:07:10 AM

Test Laboratory: RIM Testing Services

LeftHandSide_DTM1900_3slots_high_chan_amb_temp_24.2C_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900(3 slots); Frequency: 1850.2 MHz
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.339$ mho/m; $\epsilon_r = 38.703$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.862 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.254 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.1560
SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.405 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.845 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

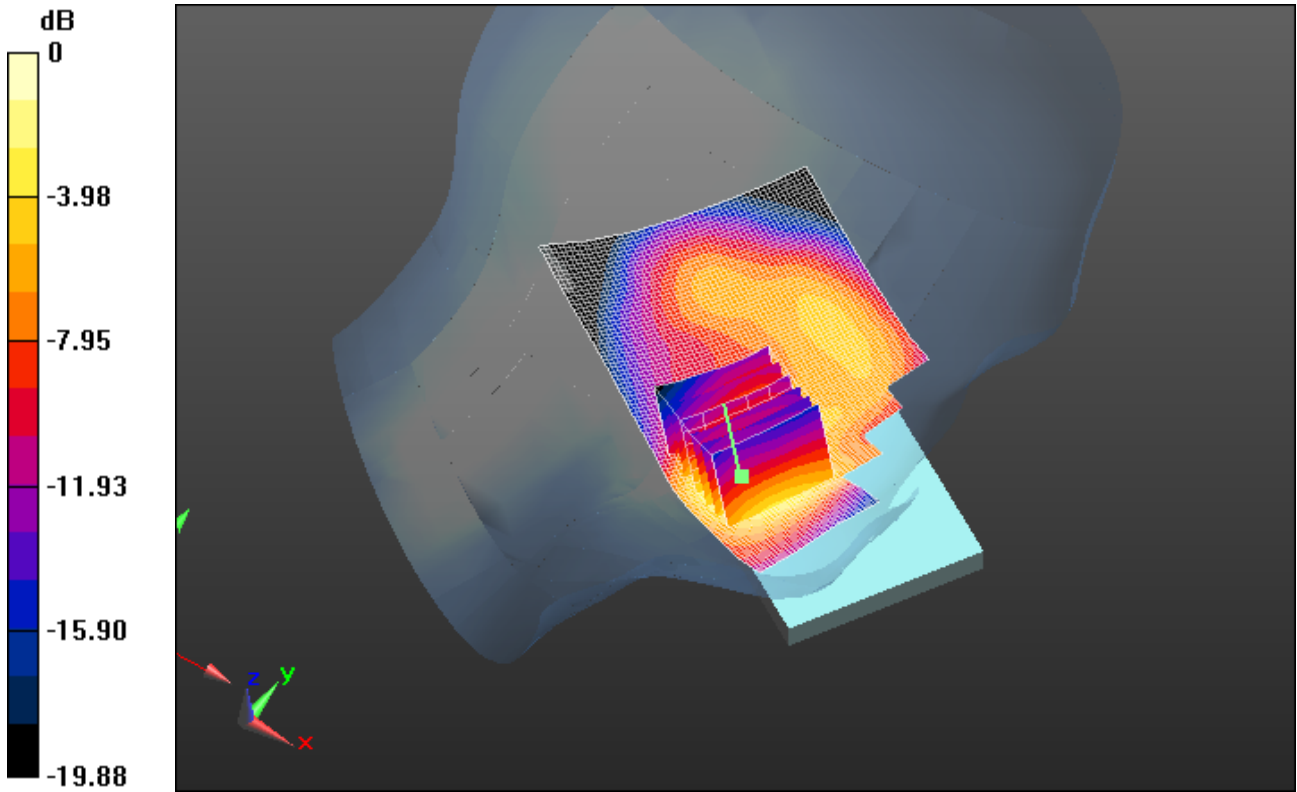

0 dB = 0.840mW/g = -1.51 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 43(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 11:25:44 AM

Test Laboratory: RIM Testing Services

**LeftHandSide_EDHE1900_4slots_high_chan_amb_temp_24.2C_liq_tem
p_22.3C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900(4 slots); Frequency: 1850.2 MHz
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.339$ mho/m; $\epsilon_r = 38.703$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.939 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 13.854 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.2890
SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.443 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.936 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

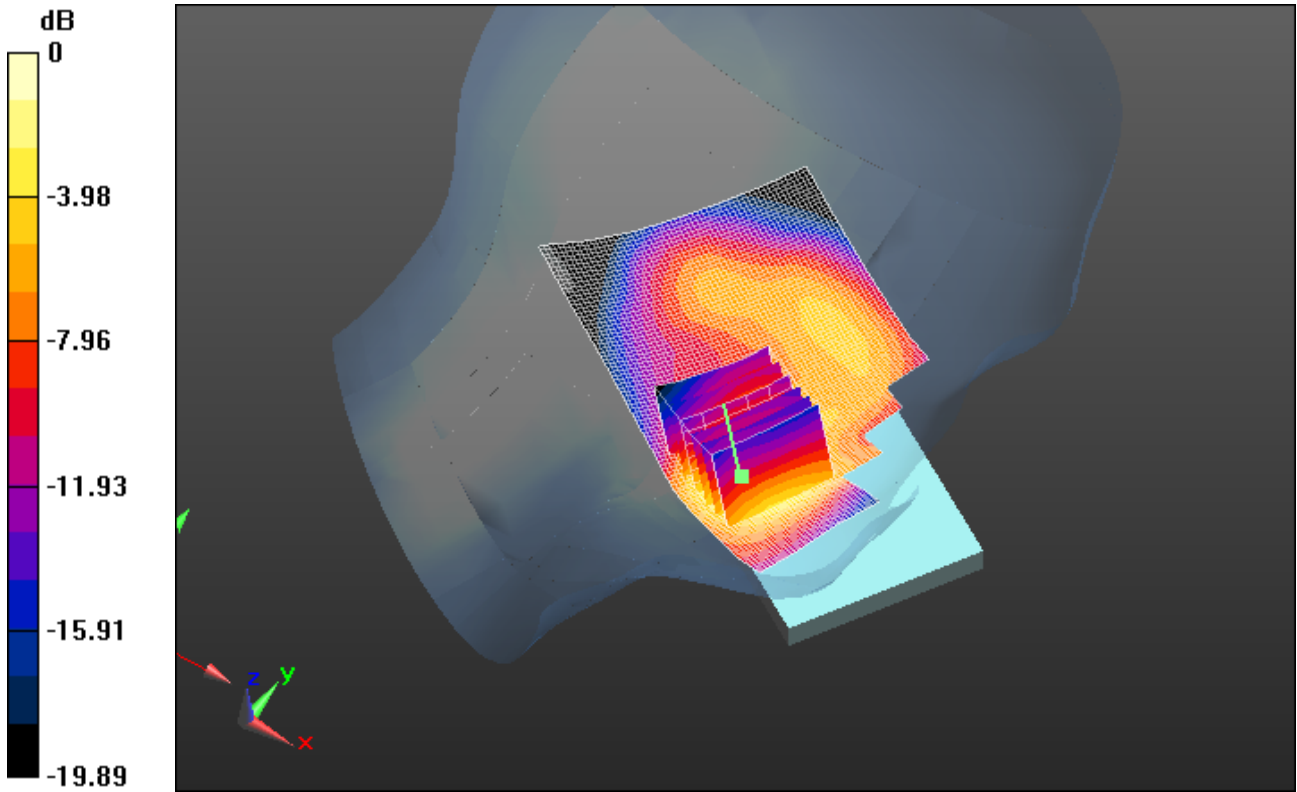

0 dB = 0.940mW/g = -0.54 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 45(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 11:46:12 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_DTM1900_mid_chan_amb_temp_24.0C_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 38.569$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.586 mW/g

Configuration/Tilt position -/Zoom Scan (5x5x7) (6x7x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.162 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.7380

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.552 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

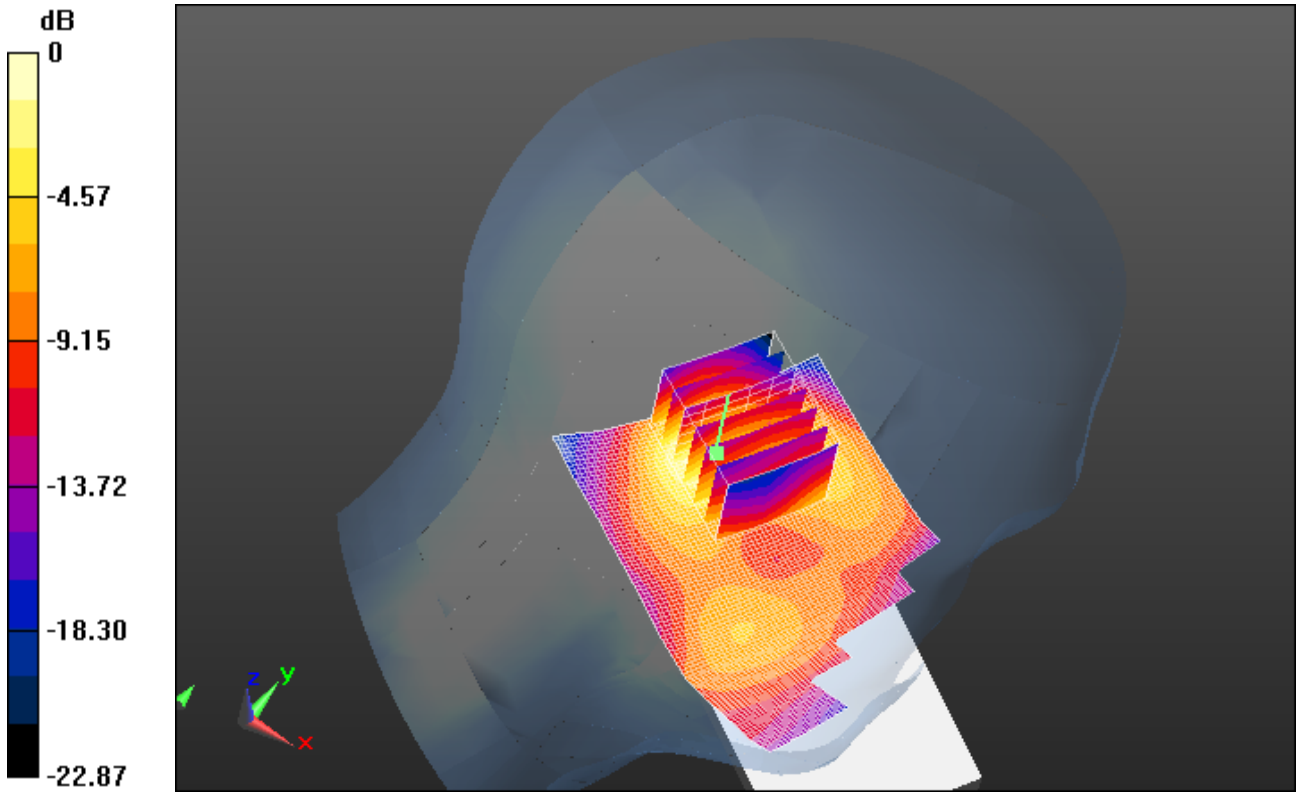

0 dB = 0.550mW/g = -5.19 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 47(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 1:17:13 AM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_mid_chan_amb_temp_23.9C_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: GSM 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ mho/m; $\epsilon_r = 39.055$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.649 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 11.227 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.9130

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.303 mW/g

Maximum value of SAR (measured) = 0.660 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW


IC
2503A-RFN80UW

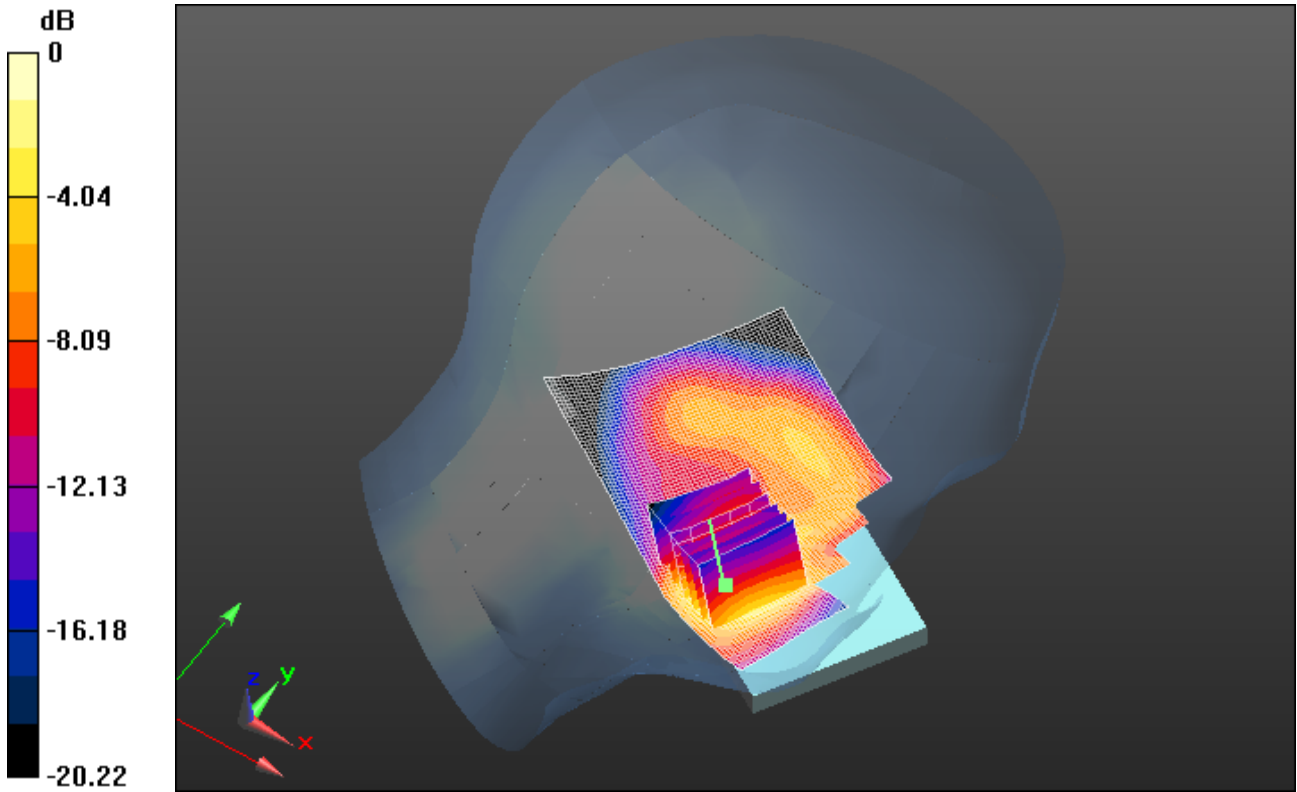

0 dB = 0.660mW/g = -3.61 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 49(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

UMTS Band II

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 50(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 6:13:30 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_Band_II_mid_chan_amb_temp_23.8C_liq_temp_22.8C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 38.569$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.728 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.926 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.8470

SAR(1 g) = 0.578 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.650 mW/g

Configuration/Touch position -/Zoom Scan 2 (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.926 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.6350

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.487 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

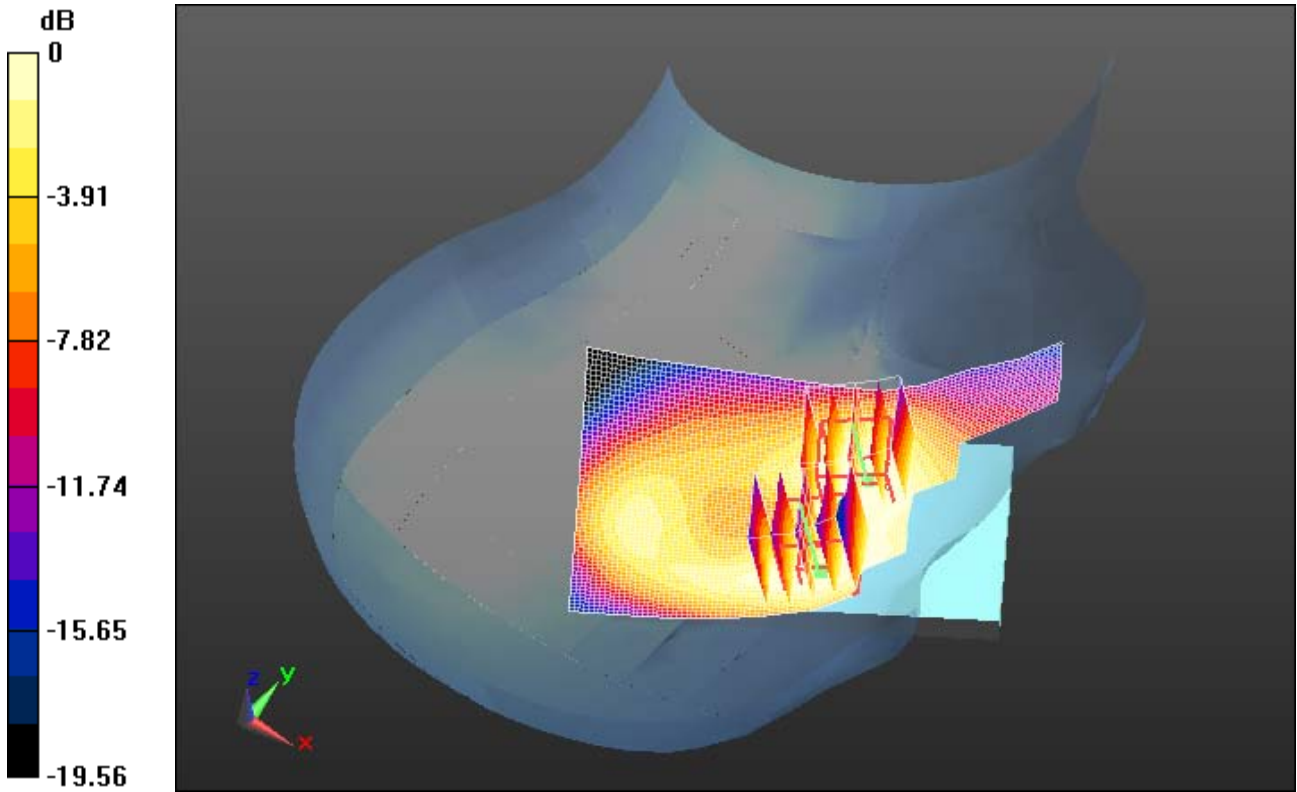

0 dB = 0.490mW/g = -6.20 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 52(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 7:31:02 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_Band_II_mid_chan_amb_temp_23.8C_liq_temper_22.8C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 38.569$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.562 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.841 V/m; Power Drift = -0.0019 dB

Peak SAR (extrapolated) = 0.7240

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.248 mW/g

Maximum value of SAR (measured) = 0.536 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

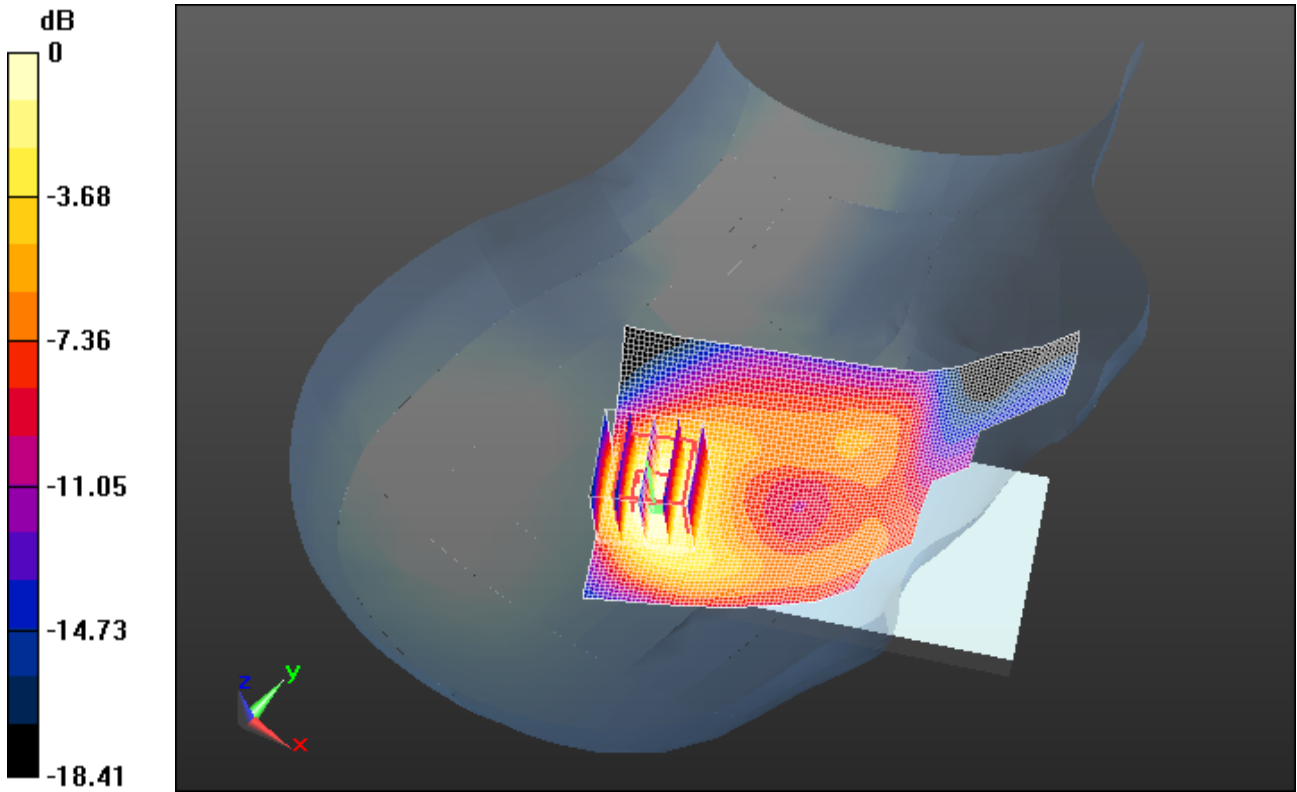

0 dB = 0.540mW/g = -5.35 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 54(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 2:12:34 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_Band_II_low_chan_amb_temp_24.0C_liq_temp_2 2.7C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.341$ mho/m; $\epsilon_r = 38.692$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (interpolated) = 1.051 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:
Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 13.414 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.4850
SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.497 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (measured) = 1.074 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

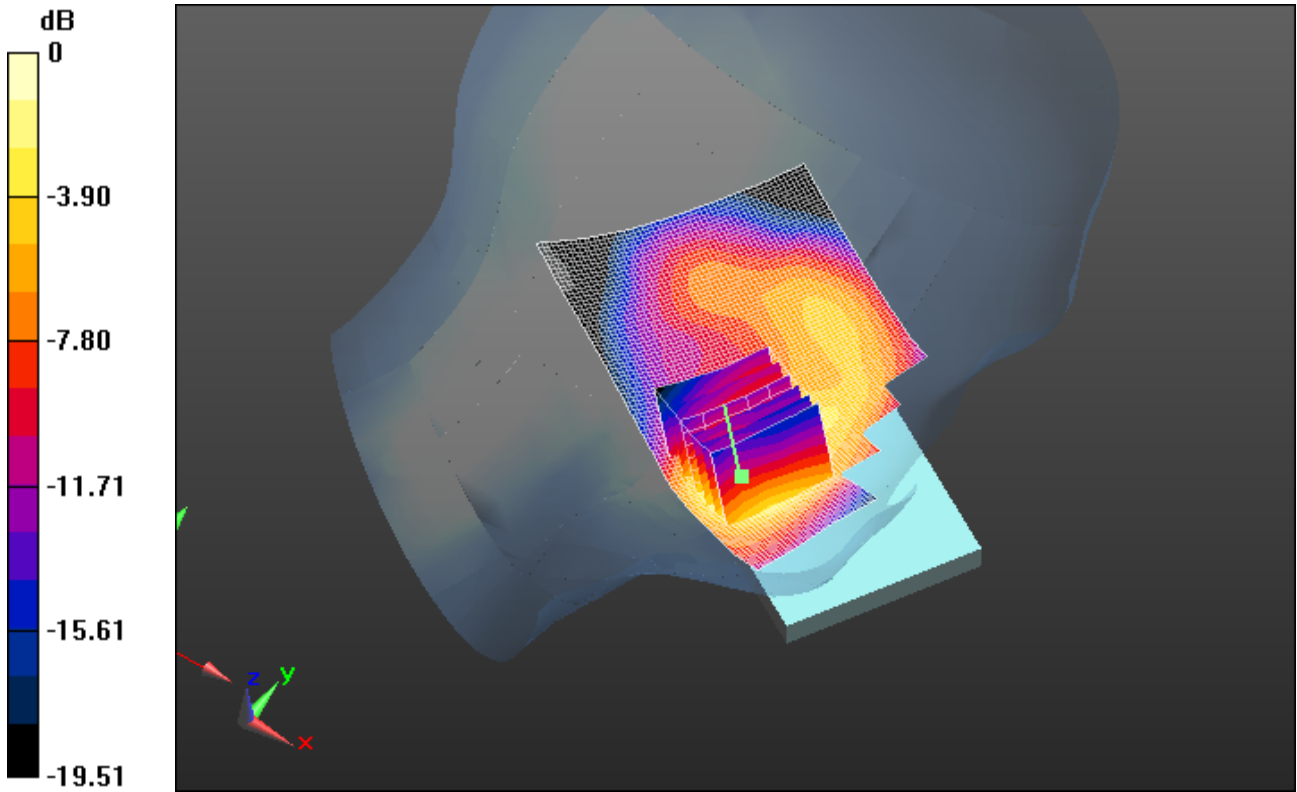

0 dB = 1.070mW/g = 0.59 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 56(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 1:53:14 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_Band_II_mid_chan_amb_temp_25.0C_liq_temp_2 2.6C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 38.569$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.116 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 13.972 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.6550

SAR(1 g) = 0.959 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 1.182 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

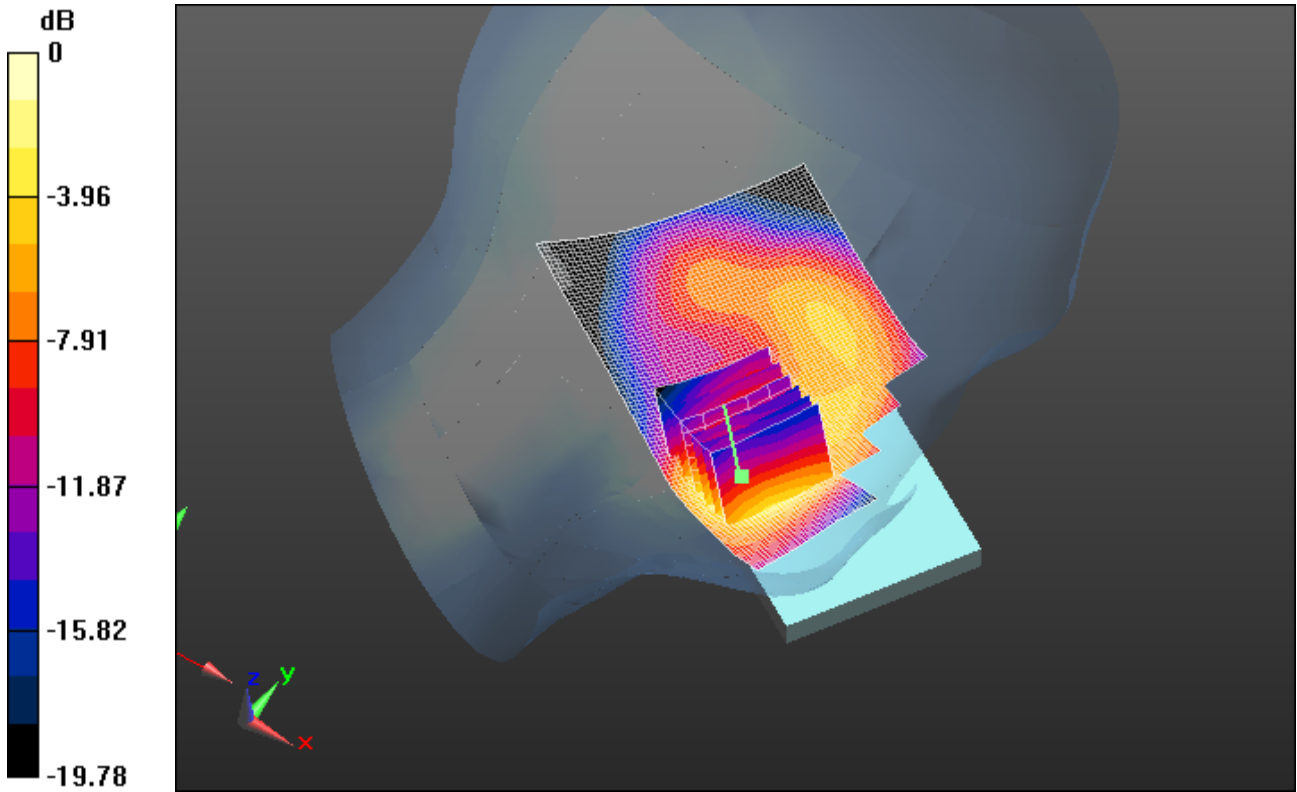

0 dB = 1.180mW/g = 1.44 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 58(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 2:34:25 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_Band_II_high_chan_amb_temp_24.3C_liq_temp_2 2.8C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.395$ mho/m; $\epsilon_r = 38.416$;
 $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (interpolated) = 1.305 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:
Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 15.668 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.8920
SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.599 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (measured) = 1.358 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

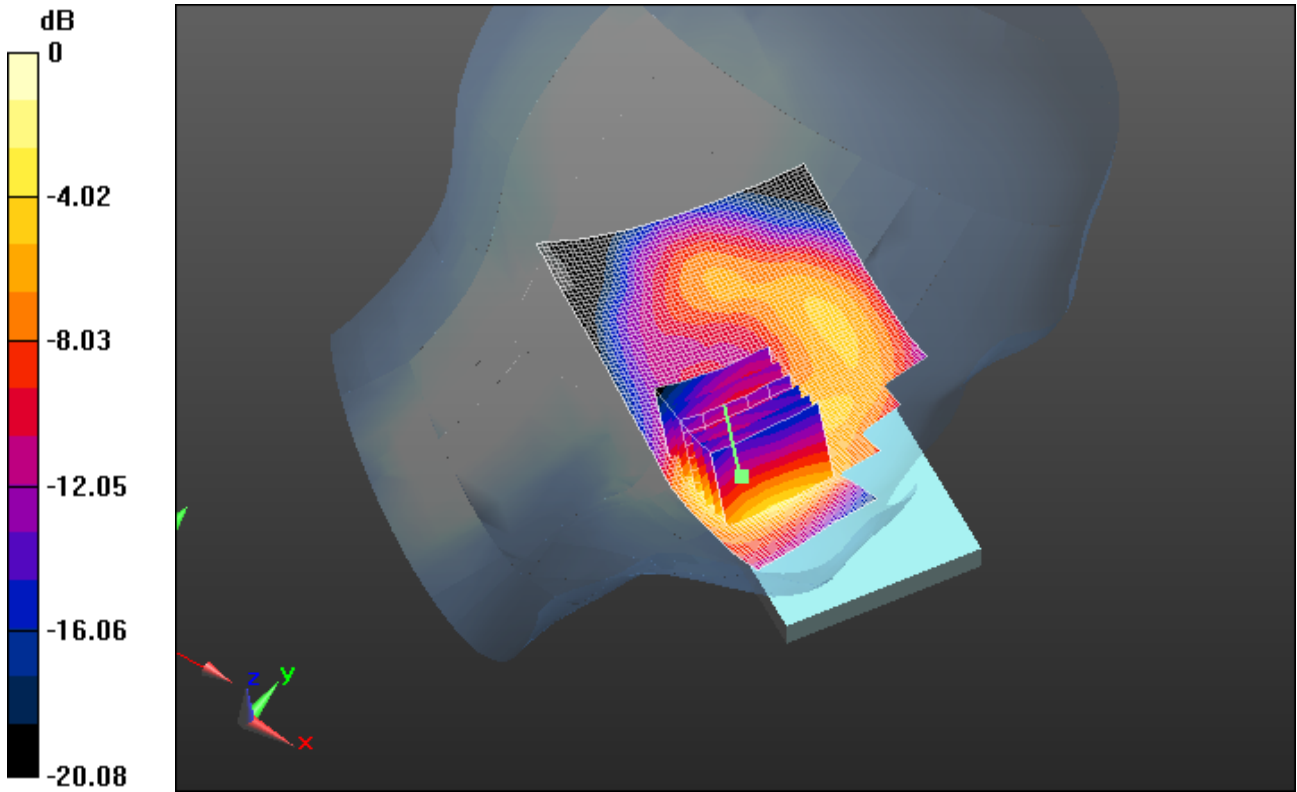

0 dB = 1.360mW/g = 2.67 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 60(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/29/2012 1:18:19 AM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_Band_II_high_chan_2nd

Scan_amb_temp_23.9C_liq_temp_21.4C

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.395$ mho/m; $\epsilon_r = 38.416$;
 $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x101x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.243 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.556 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.7830

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.564 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.235 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

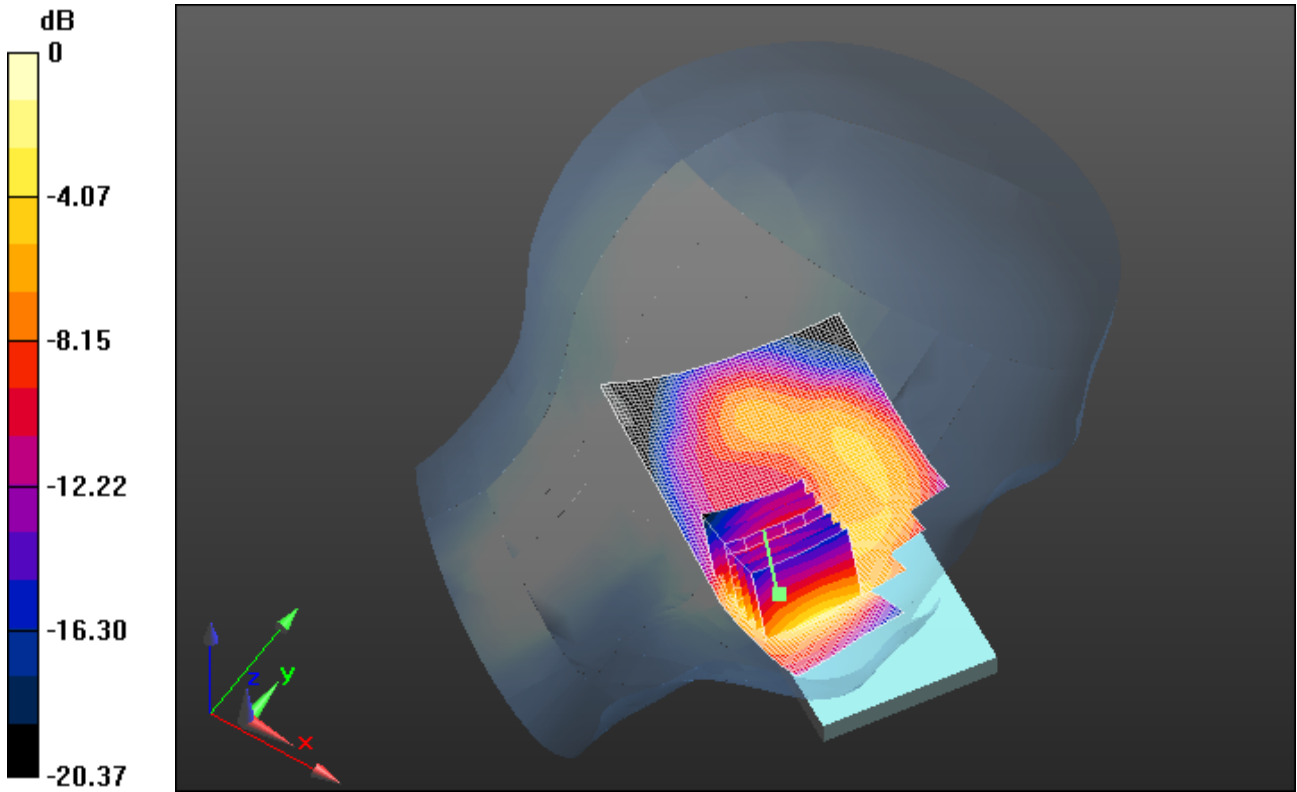

0 dB = 1.230mW/g = 1.80 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 62(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/28/2012 1:30:33 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_UMTS_Band_II_mid_chan_amb_temp_24.2C_liq_tem
p_22.1C**

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 38.569$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Tilt position -/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.586 mW/g

Configuration/Tilt position -/Zoom Scan (5x5x7) (6x7x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.255 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.7440

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 0.554 mW/g


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

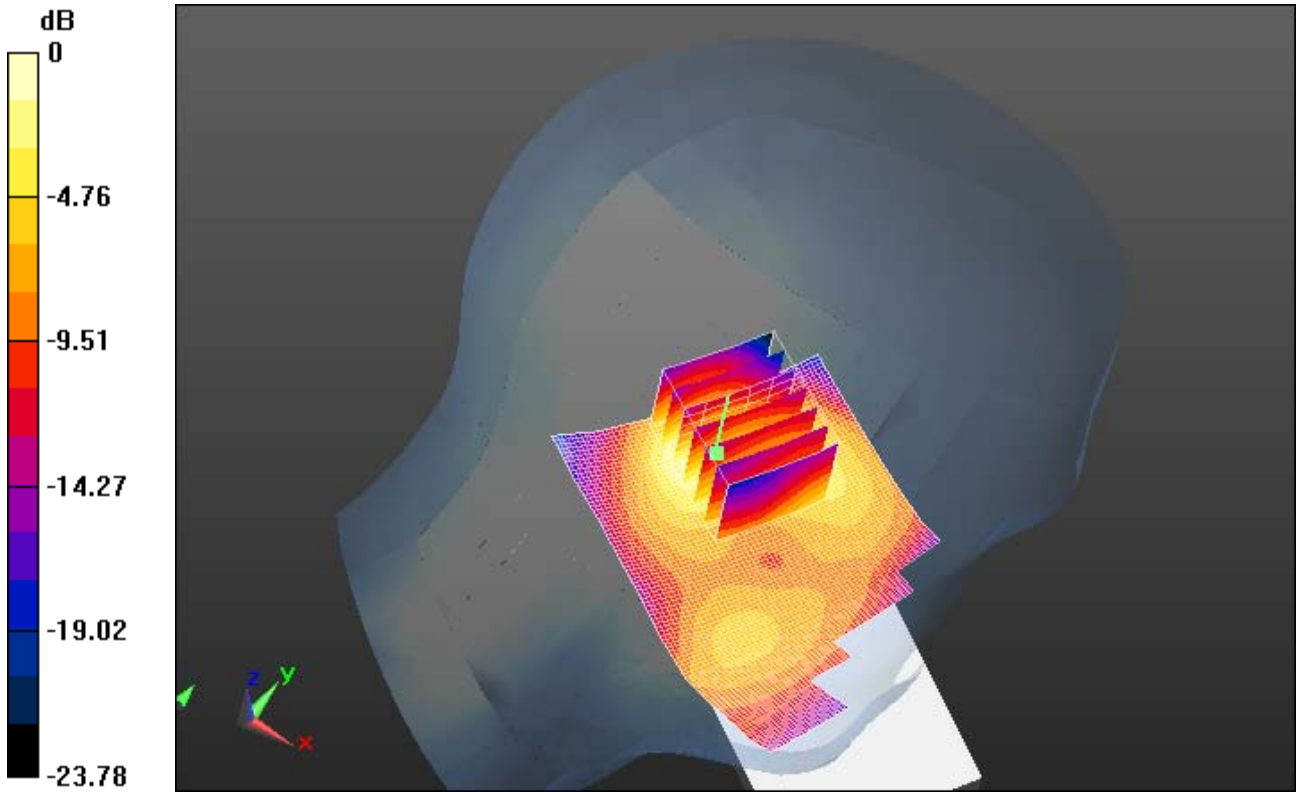

0 dB = 0.550mW/g = -5.19 dB mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 64(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 11/30/2012 2:52:08 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_Band_II_high_chan_2100

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0BA5

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 39.415$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.23, 5.23, 5.23); Calibrated: 1/11/2012;
 - Modulation Compensation:
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.0(692); SEMCAD X 14.6.8(7028)

Configuration/Touch position -/Area Scan (61x101x1): Interpolated grid:
 $dx=1.500$ mm, $dy=1.500$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.32 W/kg

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 15.759 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.86 W/kg
SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.601 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW


IC
2503A-RFN80UW

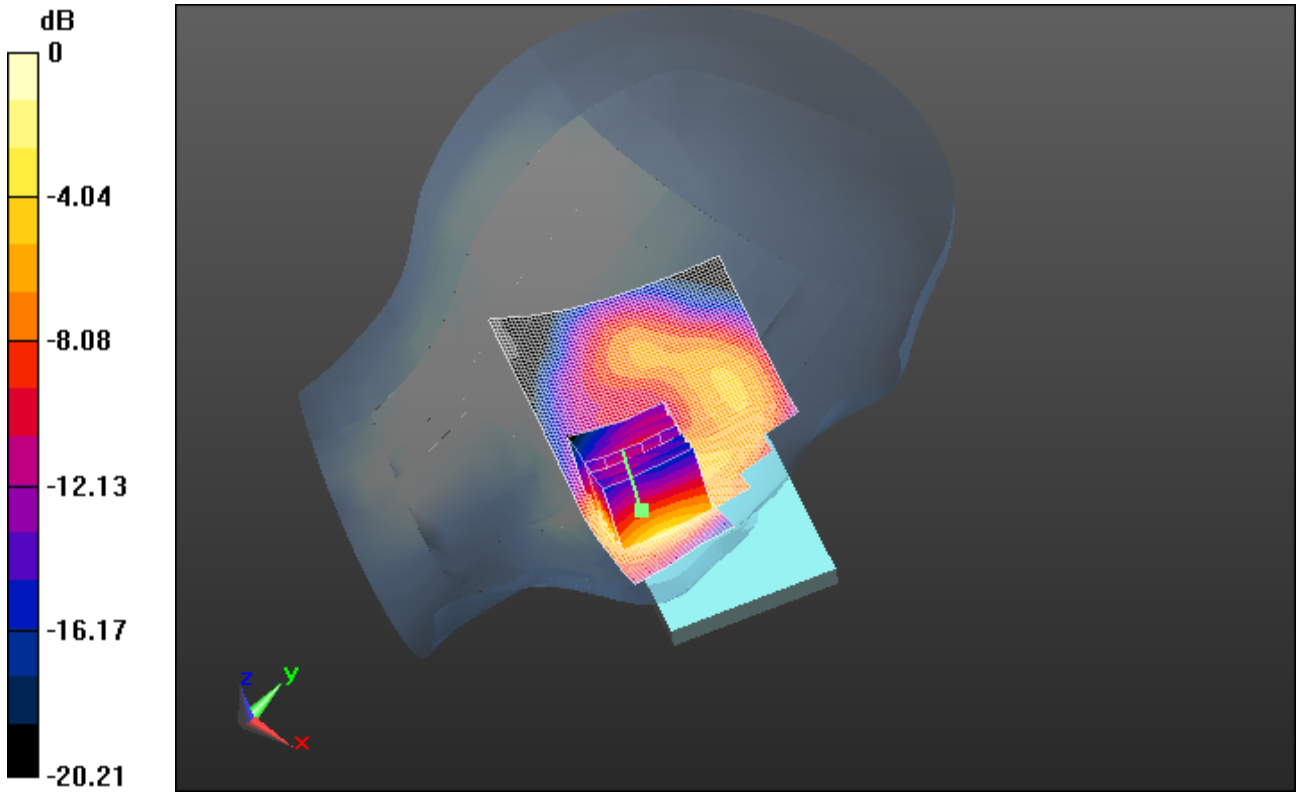

0 dB = 1.35 W/kg = 1.30 dBW/kg

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			66(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 26, 2012- Feb 28, 2013	RTS-6026-1302-18	L6ARFN80UW	2503A-RFN80UW

802.11b

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 67(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/18/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Right-Hand-Side HSL

Communication System: 802.11 b (2450); Communication System Band: 802.11 b;

Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 37.688$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.6,4.6,4.6); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Right-Hand-Side HSL/Touch Position -

802.11b_mid_chan_amb_temp_23.9C_liq_temp_21.6C/Area Scan (81x121x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.457 W/kg

Right-Hand-Side HSL/Touch Position -


802.11b_mid_chan_amb_temp_23.9C_liq_temp_21.6C/Zoom Scan


(31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 8.747 V/m; **Power Drift = -0.041 dB**


Averaged SAR: SAR(1g) = 0.403 W/kg; SAR(10g) = 0.191 W/kg

Maximum value of SAR (interpolated) = 0.987 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 68(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

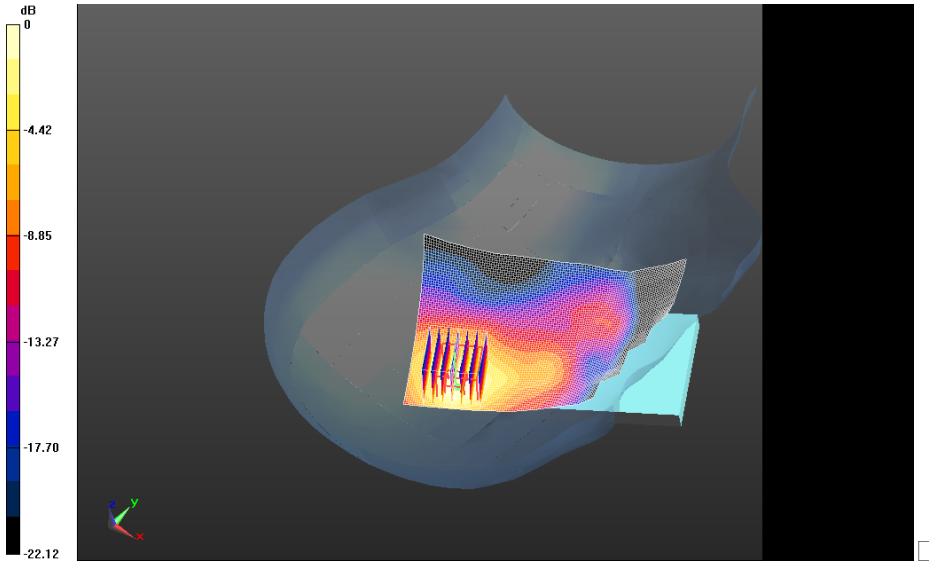

0 dB = 0.447 W/kg = -3.50 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 69(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Right-Hand-Side HSL/Tilt Position -
802.11b_mid_chan_amb_temp_23.69C_liq_temp_21.5C/Area Scan (81x111x1):
 Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.425 W/kg


Right-Hand-Side HSL/Tilt Position -
802.11b_mid_chan_amb_temp_23.69C_liq_temp_21.5C/Zoom Scan
(31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 9.445 V/m; **Power Drift = -0.064 dB**

Averaged SAR: SAR(1g) = 0.404 W/kg; SAR(10g) = 0.186 W/kg
 Maximum value of SAR (interpolated) = 1.03 W/kg

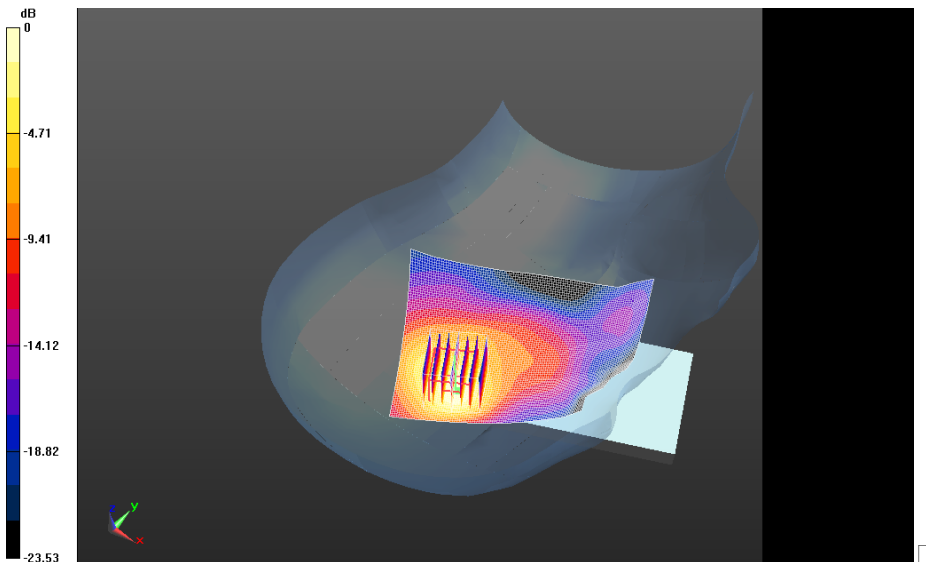

0 dB = 0.447 W/kg = -3.50 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 70(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/18/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Left-Hand-Side HSL

Communication System: 802.11 b (2450); Communication System Band: 802.11 b;

Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 37.688$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.6,4.6,4.6); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Left-Hand-Side HSL/Touch Position -

802.11b_mid_chan_amb_temp_24C_liq_temp_21.9C/Area Scan (81x111x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.205 W/kg

Left-Hand-Side HSL/Touch Position -

802.11b_mid_chan_amb_temp_24C_liq_temp_21.9C/Zoom Scan

(31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 10.019 V/m; **Power Drift = 0.078 dB**

Averaged SAR: SAR(1g) = 0.188 W/kg; SAR(10g) = 0.107 W/kg

Maximum value of SAR (interpolated) = 0.349 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

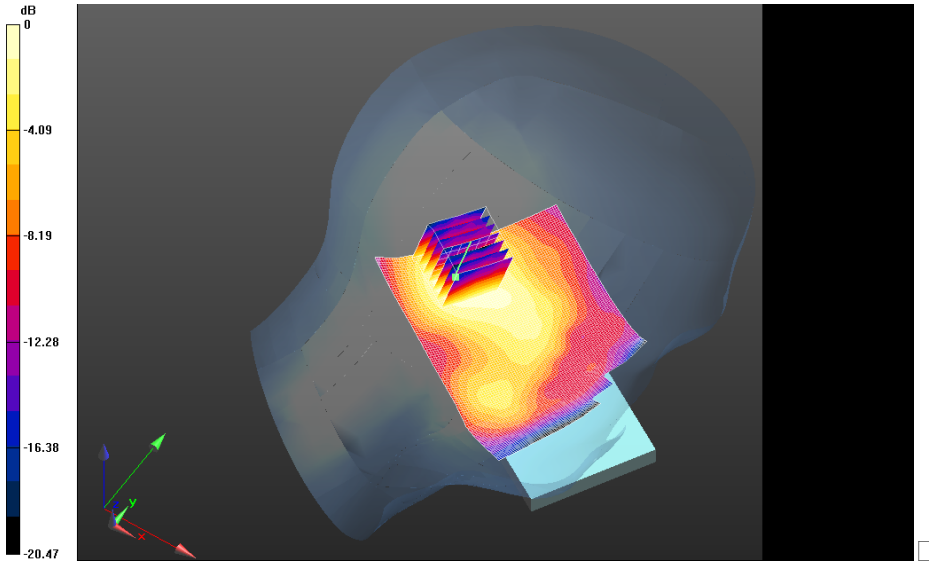

0 dB = 0.205 W/kg = -6.88 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 72(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Left-Hand-Side HSL/Tilt Position -

802.11b_mid_chan_amb_temp_23.3C_liq_temp_20.7C/Area Scan (81x121x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.236 W/kg

Left-Hand-Side HSL/Tilt Position -


802.11b_mid_chan_amb_temp_23.3C_liq_temp_20.7C/Zoom Scan

(36x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 9.815 V/m; **Power Drift = 0.068 dB**

Averaged SAR: SAR(1g) = 0.224 W/kg; SAR(10g) = 0.124 W/kg

Maximum value of SAR (interpolated) = 0.418 W/kg

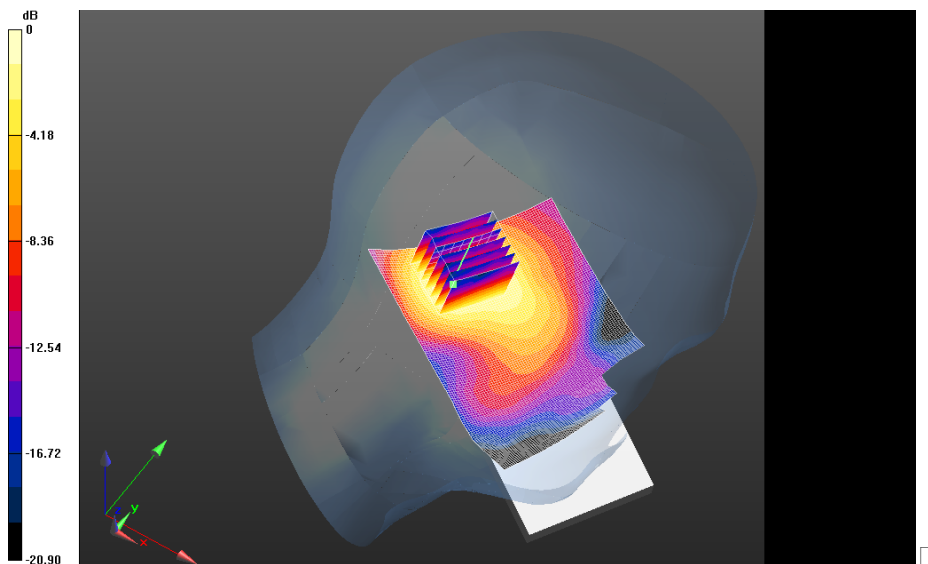

0 dB = 0.205 W/kg = -6.88 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 73(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 1/18/2013 2:55:28 PM

Test Laboratory: RIM Testing Services

Head_SAR_802.11b_2100

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0BA5

Communication System: 802.11 b (2450); Communication System Band: 802.11 b;
Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 37.688$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: ET3DV6 - SN1644; ConvF(4.6, 4.6, 4.6); Calibrated: 11/13/2012;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Right-Hand-Side HSL/Touch Position -
802.11b_2100mA_mid_chan_amb_temp_23.9C_liq_temp_21.6C 2/Area
Scan (81x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (interpolated) = 0.427 W/kg

**Right-Hand-Side HSL/Touch Position -
802.11b_2100mA_mid_chan_amb_temp_23.9C_liq_temp_21.6C 2/Zoom
Scan (8x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.123 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.954 W/kg
SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.191 W/kg


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 74(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 0.430 W/kg

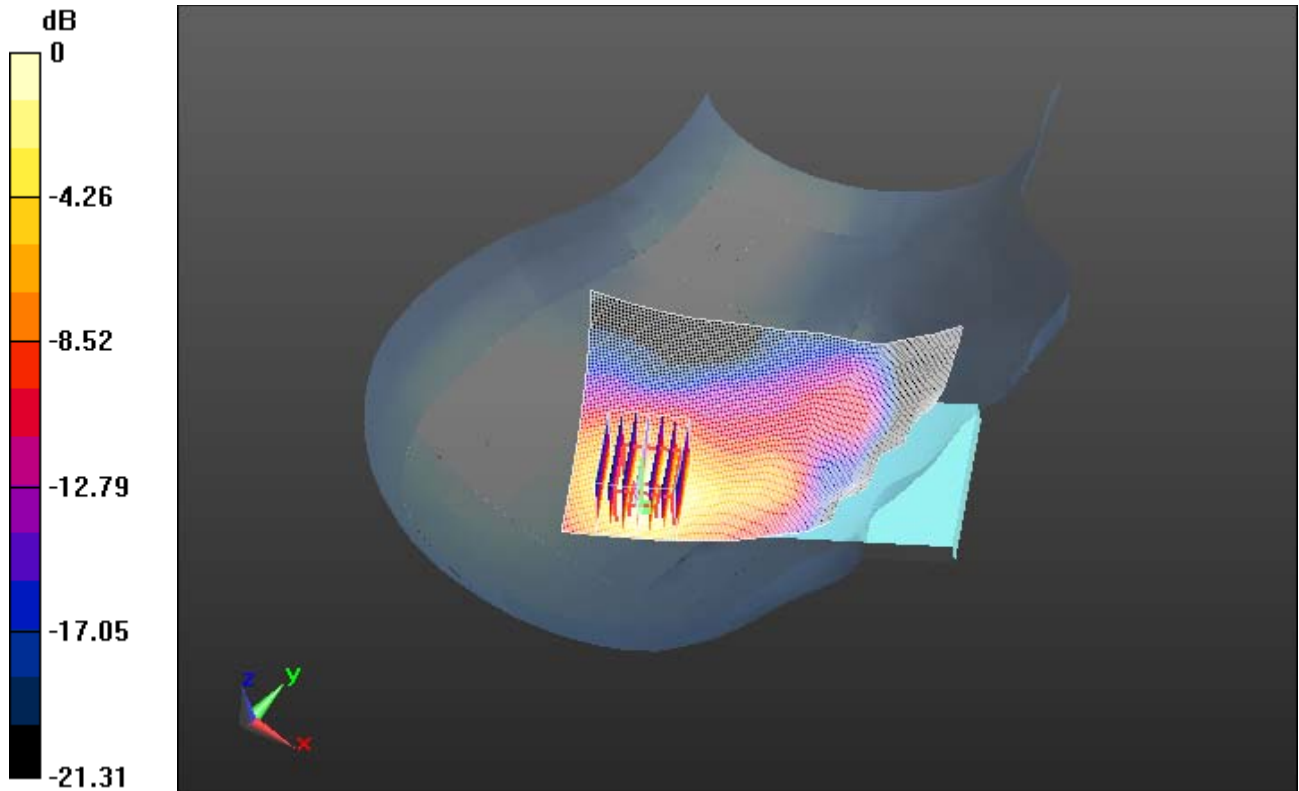

0 dB = 0.430 W/kg = -3.67 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 75(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Bluetooth

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 76(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/22/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Right-Hand-Side HSL

Communication System: Bluetooth; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: $f=2441$ MHz; $\sigma = 1.750$ S/m; $\epsilon_r = 37.398$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.6,4.6,4.6); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Right-Hand-Side HSL/Touch Position -

Bluetooth_mid_chan_amb_temp_23.8C_liq_temp_21.1C/Area Scan (81x121x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00240 W/kg

Right-Hand-Side HSL/Touch Position -

Bluetooth_mid_chan_amb_temp_23.8C_liq_temp_21.1C/Zoom Scan

(41x36x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 0.348 V/m; **Power Drift = 0.548 dB**

Averaged SAR: SAR(1g) = 0.00224 W/kg; SAR(10g) = 0.000800 W/kg

Maximum value of SAR (interpolated) = 0.00797 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

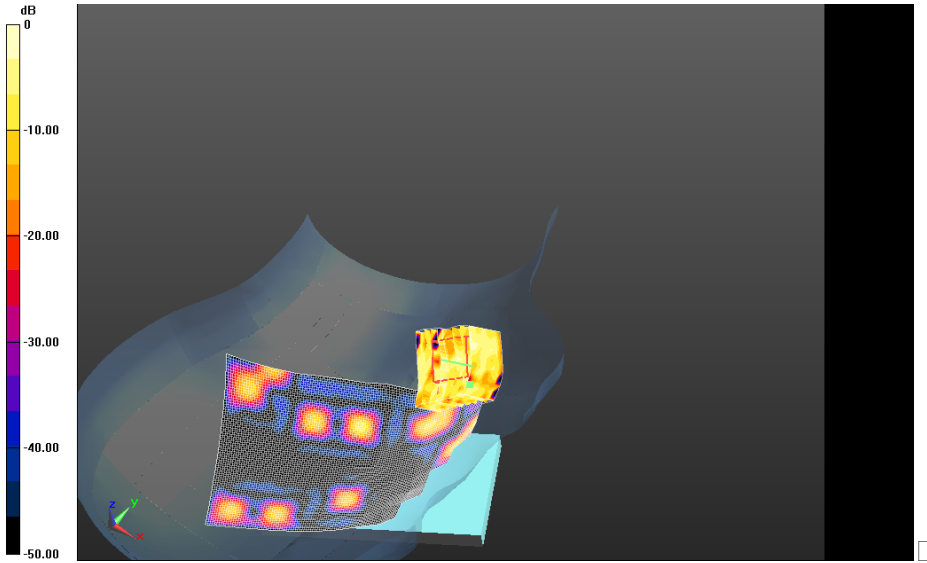

0 dB = 0.00659 W/kg = -21.81 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 78(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Right-Hand-Side HSL/Touch Position -

Bluetooth_2100mA_mid_chan_amb_temp_23.4C_liq_temp_20.8/Area Scan

(81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00644 W/kg

Right-Hand-Side HSL/Touch Position -


Bluetooth_2100mA_mid_chan_amb_temp_23.4C_liq_temp_20.8/Zoom Scan

(36x36x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 0.355 V/m; **Power Drift = -0.053 dB**

Averaged SAR: SAR(1g) = 0.000720 W/kg; SAR(10g) = 0.000262 W/kg

Maximum value of SAR (interpolated) = 0.00548 W/kg

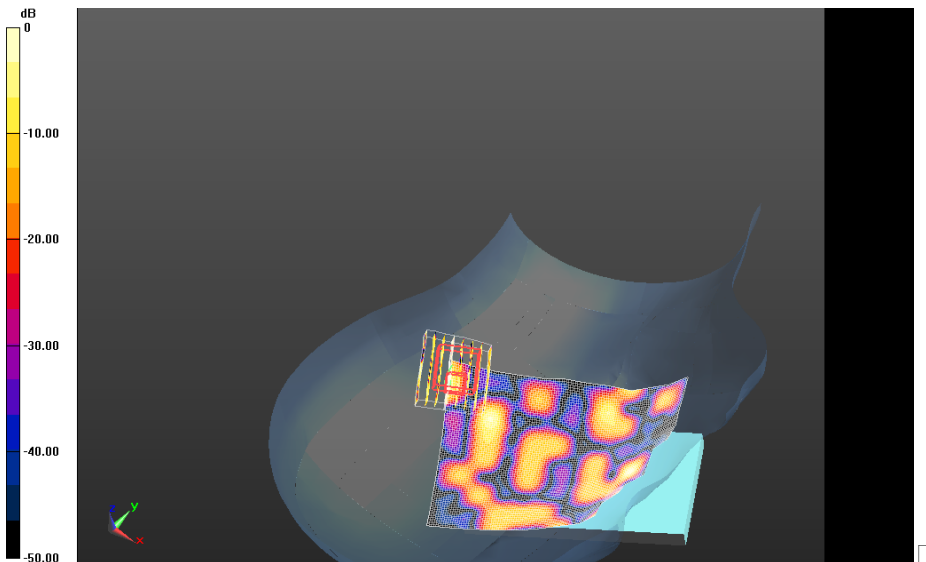

0 dB = 0.00659 W/kg = -21.81 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 79(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Right-Hand-Side HSL/Tilt Position -

Bluetooth_mid_chan_amb_temp_23.5C_liq_temp_21.1C/Area Scan (81x111x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00180 W/kg

Right-Hand-Side HSL/Tilt Position -


Bluetooth_mid_chan_amb_temp_23.5C_liq_temp_21.1C/Zoom Scan

(56x46x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 0.737 V/m; **Power Drift = 0.463 dB**

Averaged SAR: SAR(1g) = 0.000406 W/kg; SAR(10g) = 0.000143 W/kg

Maximum value of SAR (interpolated) = 0.00648 W/kg

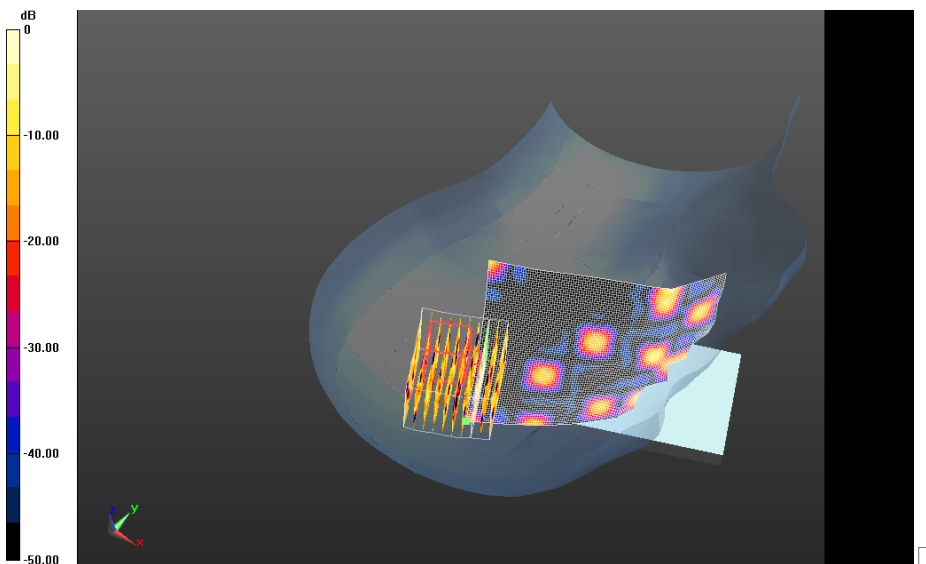

0 dB = 0.00529 W/kg = -22.77 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 80(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/22/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Left-Hand-Side HSL

Communication System: Bluetooth; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: $f=2441$ MHz; $\sigma = 1.750$ S/m; $\epsilon_r = 37.398$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.6,4.6,4.6); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Left-Hand-Side HSL/Touch Position -

Bluetooth_mid_chan_amb_temp_23.8C_liq_temp_21.1C/Area Scan (81x111x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00470 W/kg

Left-Hand-Side HSL/Touch Position -

Bluetooth_mid_chan_amb_temp_23.8C_liq_temp_21.1C/Zoom Scan


(36x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 0.406 V/m; **Power Drift = 0.227 dB**

Averaged SAR: SAR(1g) = 0.000290 W/kg; SAR(10g) = 0.0000660 W/kg


Maximum value of SAR (interpolated) = 0.00587 W/kg

Field decay constant of 3.3 mm.

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 81(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

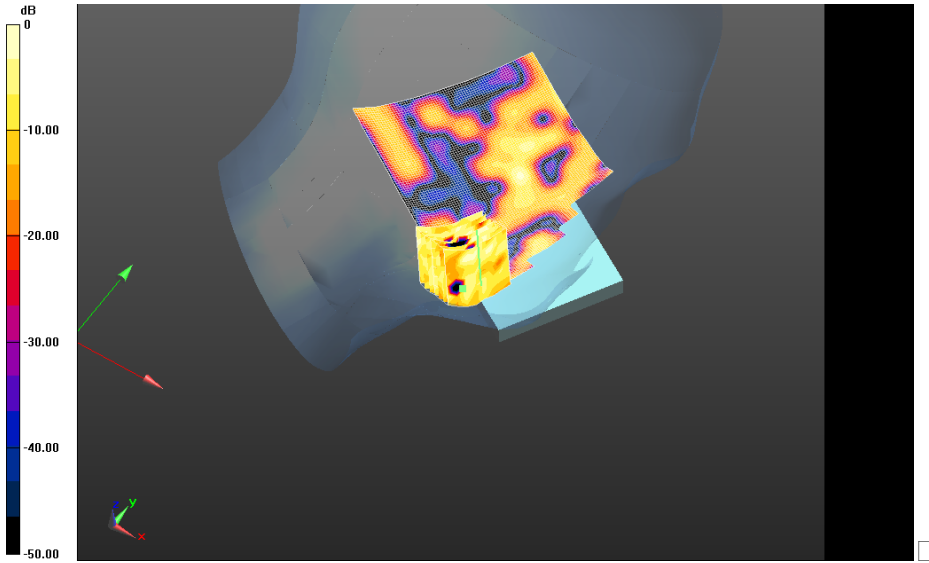


0 dB = 0.00587 W/kg = -22.31 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 82(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW


Left-Hand-Side HSL/Tilt Position -
Bluetooth_mid_chan_amb_temp_23.8C_liq_temp_21.1C/Area Scan (81x101x1):
Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00881 W/kg

Left-Hand-Side HSL/Tilt Position -
Bluetooth_mid_chan_amb_temp_23.8C_liq_temp_21.1C/Zoom Scan (41x36x36)/Cube
0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 0.341 V/m; **Power Drift = 0.439 dB**

Averaged SAR: SAR(1g) = 0.000448 W/kg; SAR(10g) = 0.000105 W/kg
Maximum value of SAR (interpolated) = 0.00755 W/kg

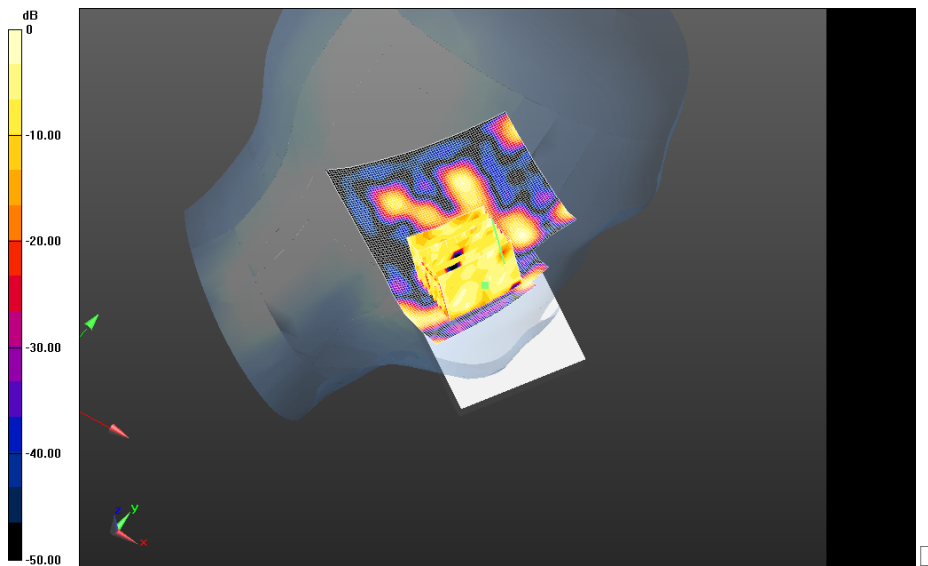

0 dB = 0.00587 W/kg = -22.31 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 83(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 2/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 2AB01FAD

Configuration: Right-Hand-Side HSL 802.11b Rev3-02

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.767$ S/m; $\epsilon_r = 37.742$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.65,4.65,4.65); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Right-Hand-Side HSL 802.11b Rev3-02/Touch Position -

802.11b_mid_chan_amb_temp_23.2C_liq_temp_20.5C/Area Scan (81x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.163 W/kg

Right-Hand-Side HSL 802.11b Rev3-02/Touch Position -

802.11b_mid_chan_amb_temp_23.2C_liq_temp_20.5C/Zoom Scan (36x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 5.193 V/m; **Power Drift = 0.449 dB**

Averaged SAR: SAR(1g) = 0.121 W/kg; SAR(10g) = 0.0587 W/kg

Maximum value of SAR (interpolated) = 0.278 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW


IC
2503A-RFN80UW

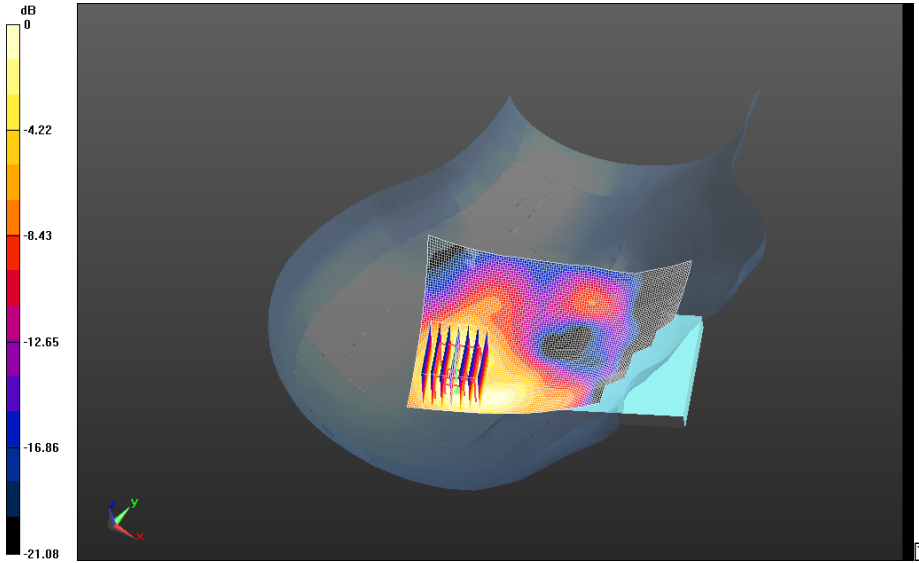

0 dB = 0.162 W/kg = -7.90 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 85(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

802.11a

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 86(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Right-Hand-Side HSL 5200 MHz

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;

Frequency: 5240 MHz

Medium Parameters used: $f=5240$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 34.212$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.73,4.73,4.73); Calibrated: 11/14/2012;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Right-Hand-Side HSL 5200 MHz/Touch Position -

802.11a_chan48_low_band_amb_temp_23.2C_liq_temp_21.3C/Area Scan

(81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.430 W/kg

Right-Hand-Side HSL 5200 MHz/Touch Position -


802.11a_chan48_low_band_amb_temp_23.2C_liq_temp_21.3C/Zoom Scan


(36x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 10.144 V/m; Power Drift = 0.139 dB


Averaged SAR: SAR(1g) = 0.207 W/kg; SAR(10g) = 0.0786 W/kg

Maximum value of SAR (interpolated) = 2.05 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 87(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

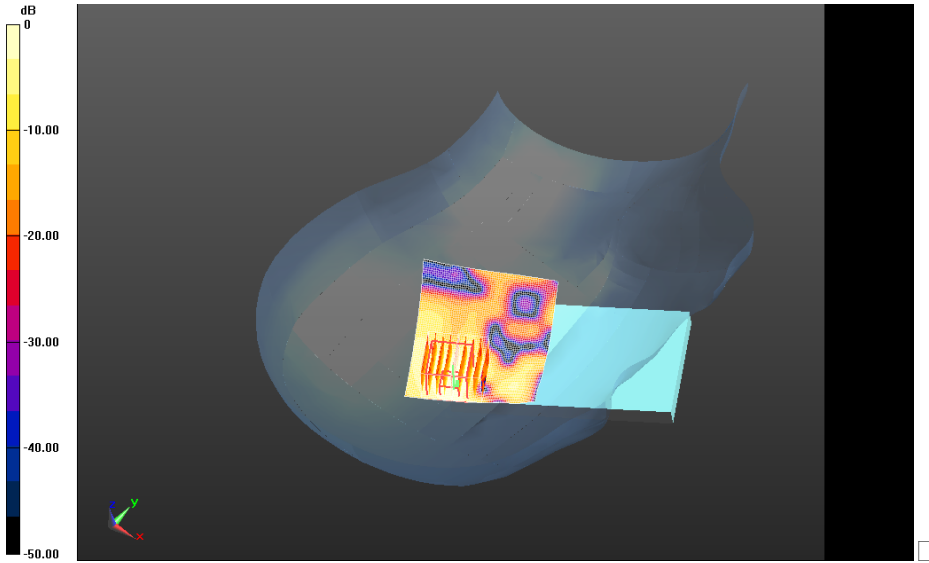

0 dB = 0.401 W/kg = -3.97 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 88(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Right-Hand-Side HSL 5200 MHz/Touch Position - 802.11a_chan52_low_band_amb_temp_23.9C_liq_temp_21.4C/Area Scan (81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.454 W/kg


Right-Hand-Side HSL 5200 MHz/Touch Position - 802.11a_chan52_low_band_amb_temp_23.9C_liq_temp_21.4C/Zoom Scan (36x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 10.207 V/m; Power Drift = 0.225 dB

Averaged SAR: SAR(1g) = 0.232 W/kg; SAR(10g) = 0.0894 W/kg
Maximum value of SAR (interpolated) = 0.949 W/kg

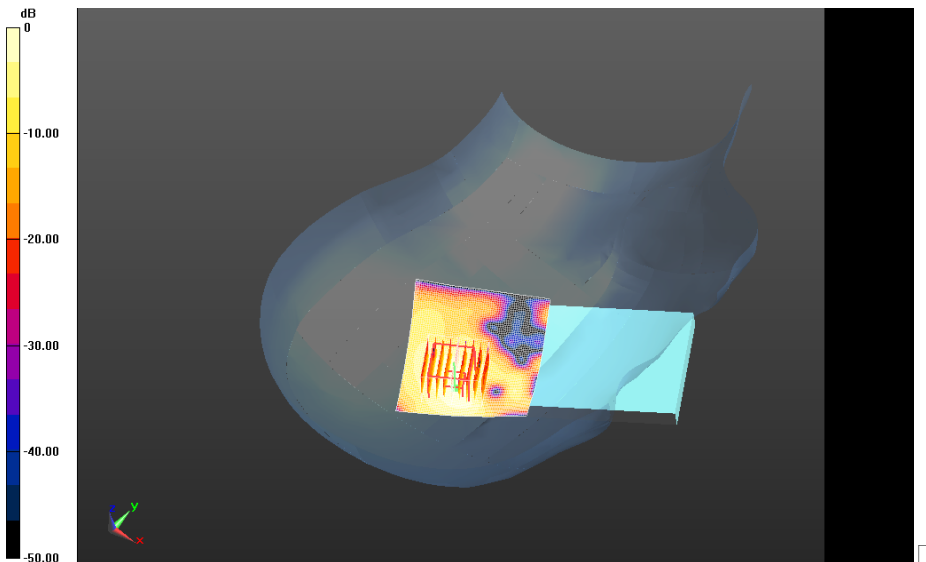

0 dB = 0.401 W/kg = -3.97 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 89(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Right-Hand-Side HSL 5500 MHz

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;

Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 34.126$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.28,4.28,4.28); Calibrated: 11/14/2012;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Right-Hand-Side HSL 5500 MHz/Touch Position -

802.11a_chan104_Upper_bandI_amb_temp_23.4C_liq_temp_22.6C/Area Scan

(81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.587 W/kg

[10g avg. SAR maximum on border.](#)

Right-Hand-Side HSL 5500 MHz/Touch Position -

802.11a_chan104_Upper_bandI_amb_temp_23.4C_liq_temp_22.6C/Zoom

Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm,

dz=0.400 mm

Reference Value = 10.912 V/m; Power Drift = 0.144 dB

Averaged SAR: SAR(1g) = 0.245 W/kg; SAR(10g) = 0.0749 W/kg

Maximum value of SAR (interpolated) = 0.962 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

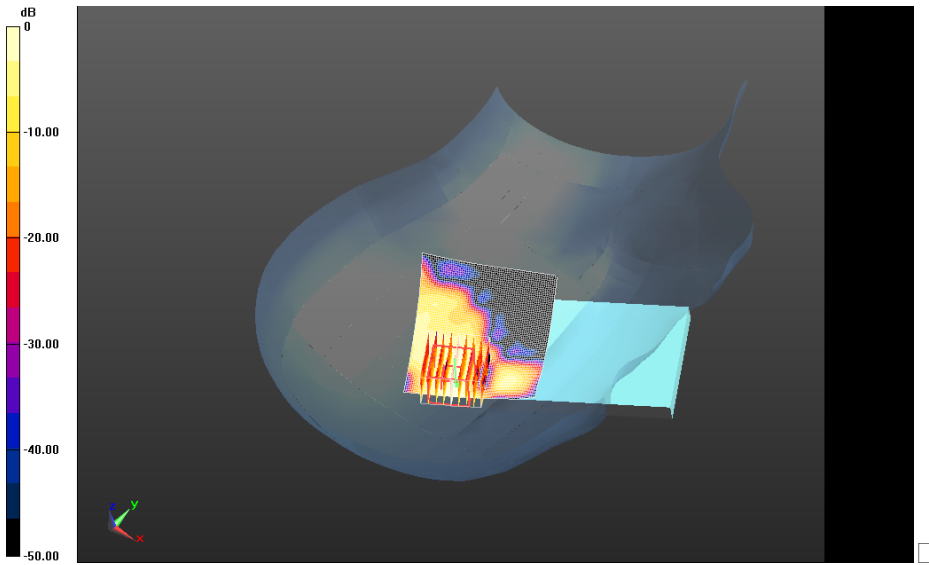

0 dB = 0.504 W/kg = -2.98 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 91(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Right-Hand-Side HSL 5500 MHz/Tilt Position - 802.11a_chan104_upper_bandI_amb_temp_23.9C_liq_temp_21.4C/Area Scan (81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.360 W/kg


Right-Hand-Side HSL 5500 MHz/Tilt Position - 802.11a_chan104_upper_bandI_amb_temp_23.9C_liq_temp_21.4C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 6.561 V/m; Power Drift = 0.451 dB

Averaged SAR: SAR(1g) = 0.188 W/kg; SAR(10g) = 0.0638 W/kg
Maximum value of SAR (interpolated) = 0.848 W/kg

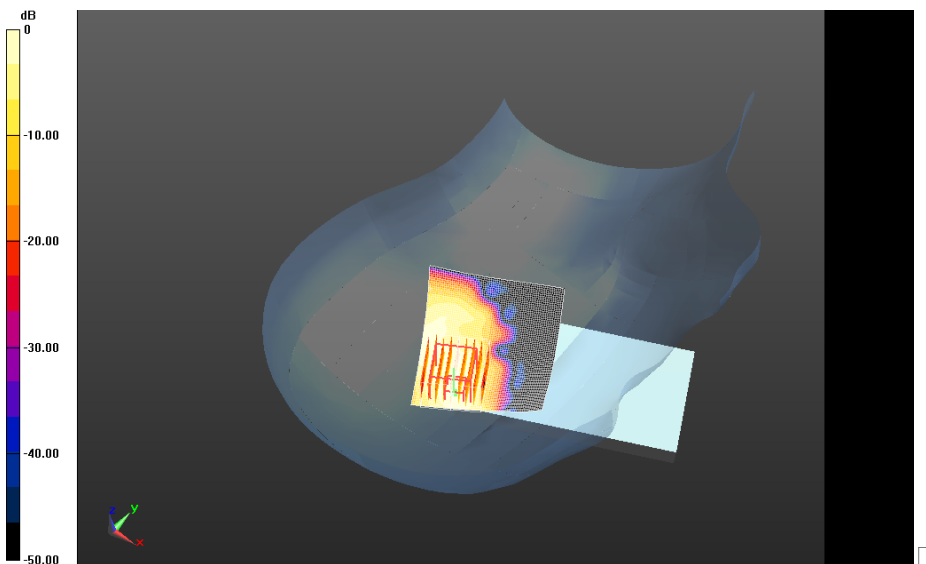

0 dB = 0.504 W/kg = -2.98 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 92(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Right-Hand-Side HSL 5500 MHz/Touch Position - 802.11a_2100mA_batt_chan104_Upper_bandI_amb_temp_23.3C_liq_temp_21.4C/ Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.538 W/kg


Right-Hand-Side HSL 5500 MHz/Touch Position - 802.11a_2100mA_batt_chan104_Upper_bandI_amb_temp_23.3C_liq_temp_21.4C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 9.756 V/m; Power Drift = 0.206 dB

Averaged SAR: SAR(1g) = 0.231 W/kg; SAR(10g) = 0.0695 W/kg
Maximum value of SAR (interpolated) = 0.942 W/kg

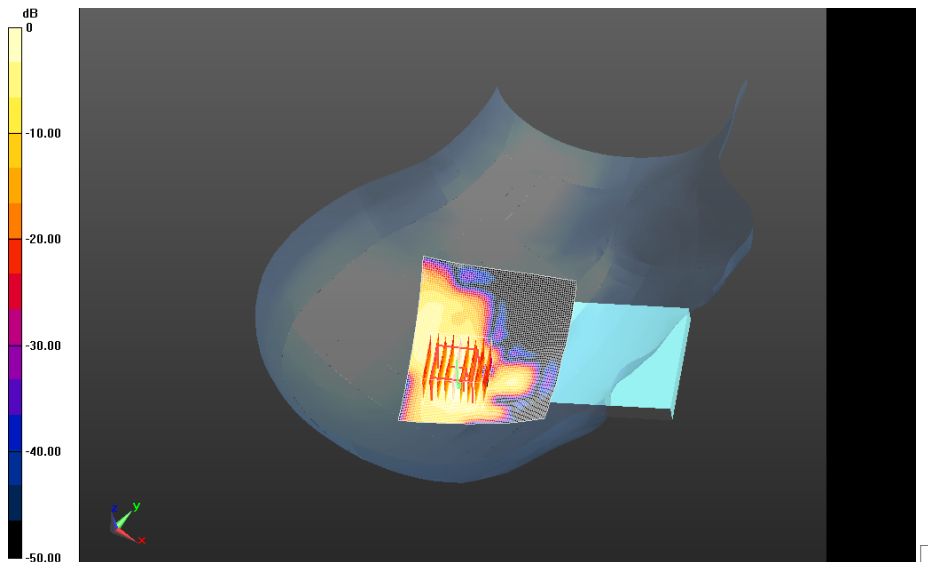

0 dB = 0.368 W/kg = -4.34 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 93(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 1/11/2013 1:42:53 PM

Test Laboratory: RIM Testing Services

RightHeadSide_802.11a_Chan149

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0BA5

Communication System: 802.11a ; Frequency: 5745 MHz
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.438$ S/m; $\epsilon_r = 34.861$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.12, 4.12, 4.12); Calibrated: 11/14/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Right-Hand-Side HSL 5800 MHz/Touch Position -
802.11a_chan149_Upper_bandII_amb_temp_23.4C_liq_temp_22.6C/Area
Scan (101x151x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.331 W/kg

**Right-Hand-Side HSL 5800 MHz/Touch Position -
802.11a_chan149_Upper_bandII_amb_temp_23.4C_liq_temp_22.6C
2/Zoom Scan (9x9x12)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 6.800 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.415 W/kg
SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.035 W/kg
Maximum value of SAR (measured) = 0.213 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

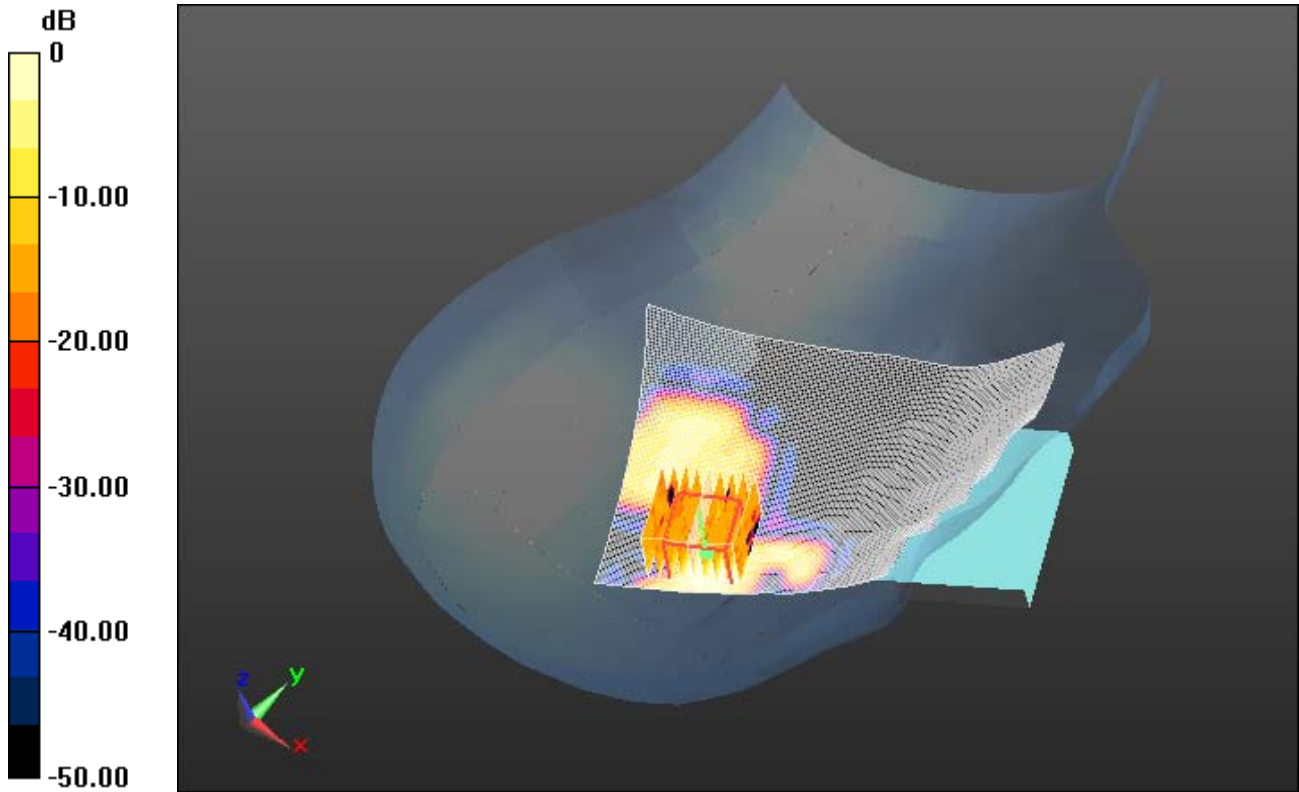

0 dB = 0.213 W/kg = -6.72 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 95(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Left-Hand-Side HSL 5200 MHz

Communication System: 802.11a ; Communication System Band: 802.11a 48;

Frequency: 5240 MHz

Medium Parameters used: $f=5240$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 34.212$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.73,4.73,4.73); Calibrated: 11/14/2012;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Left-Hand-Side HSL 5200 MHz/Touch Position -

802.11a_chan44_low_band_amb_temp_23.4C_liq_temp_21.5C/Area Scan

(81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.227 W/kg

Left-Hand-Side HSL 5200 MHz/Touch Position -

802.11a_chan44_low_band_amb_temp_23.4C_liq_temp_21.5C/Zoom Scan

(36x41x61)/Cube 0: **Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm**

Reference Value = 7.014 V/m; Power Drift = -0.040 dB

Averaged SAR: SAR(1g) = 0.125 W/kg; SAR(10g) = 0.0465 W/kg

Maximum value of SAR (interpolated) = 0.404 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

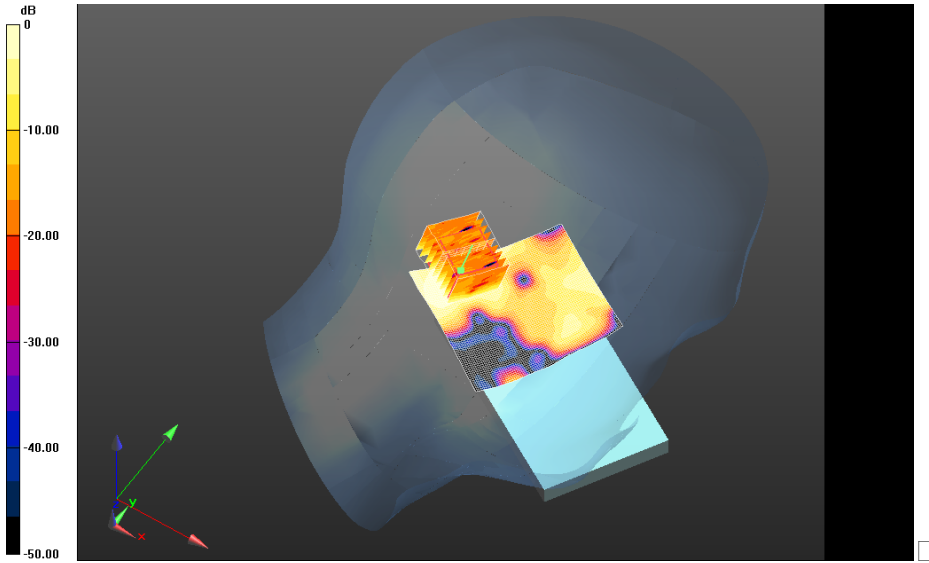

0 dB = 0.230 W/kg = -6.38 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 97(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Left-Hand-Side HSL 5200 MHz/Touch Position - 802.11a_chan52_mid_band_amb_temp_23.3C_liq_temp_21.4C/Area Scan (81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.272 W/kg


Left-Hand-Side HSL 5200 MHz/Touch Position - 802.11a_chan52_mid_band_amb_temp_23.3C_liq_temp_21.4C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 7.135 V/m; Power Drift = 0.306 dB

Averaged SAR: SAR(1g) = 0.148 W/kg; SAR(10g) = 0.0550 W/kg
Maximum value of SAR (interpolated) = 0.529 W/kg

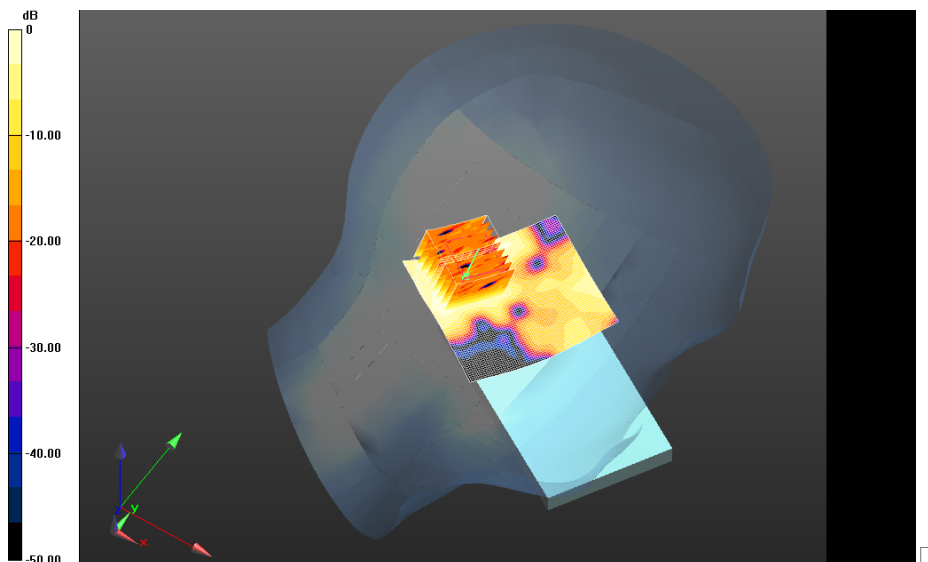

0 dB = 0.230 W/kg = -6.38 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 98(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

**Left-Hand-Side HSL 5200 MHz/Tilt Position -
802.11a_chan52_low_band_amb_temp_23.4C_liq_temp_21.3C 2/Area Scan
(81x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.314 W/kg


**Left-Hand-Side HSL 5200 MHz/Tilt Position -
802.11a_chan52_low_band_amb_temp_23.4C_liq_temp_21.3C 2/Zoom Scan
(36x41x61)/Cube 0:** Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 8.546 V/m; Power Drift = 0.179 dB

Averaged SAR: SAR(1g) = 0.179 W/kg; SAR(10g) = 0.0695 W/kg
Maximum value of SAR (interpolated) = 0.585 W/kg

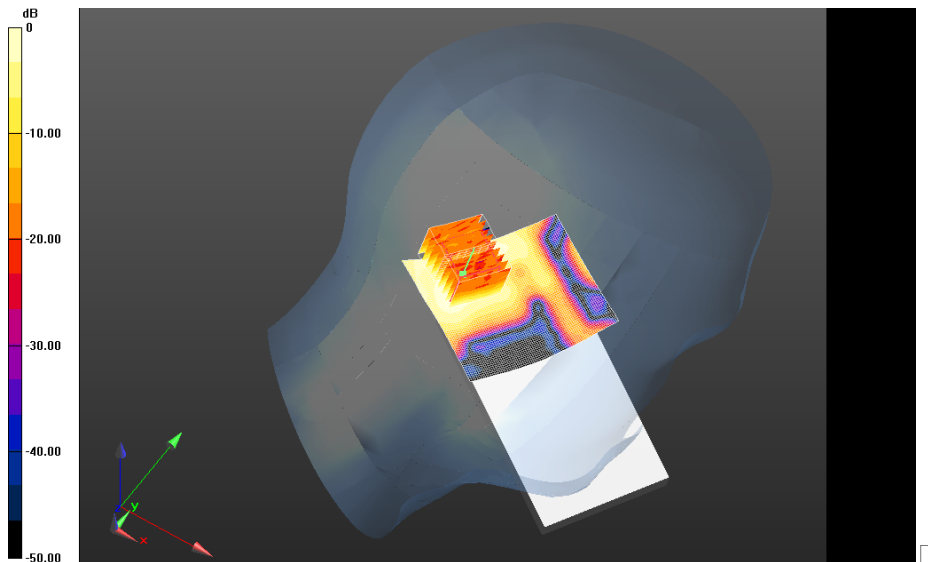

0 dB = 0.264 W/kg = -5.78 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 99(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date: 1/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0BA5

Configuration: Left-Hand-Side HSL 5500 MHz

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;

Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 34.126$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.28,4.28,4.28); Calibrated: 11/14/2012;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Left-Hand-Side HSL 5500 MHz/Touch Position -

802.11a_chan104_Upper_bandI_amb_temp_23.3C_liq_temp_21.3C 2/Area Scan

(81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.235 W/kg

Left-Hand-Side HSL 5500 MHz/Touch Position -

802.11a_chan104_Upper_bandI_amb_temp_23.3C_liq_temp_21.3C 2/Zoom

Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm,

dz=0.400 mm

Reference Value = 7.174 V/m; Power Drift = -0.060 dB

Averaged SAR: SAR(1g) = 0.116 W/kg; SAR(10g) = 0.0438 W/kg

Maximum value of SAR (interpolated) = 0.397 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

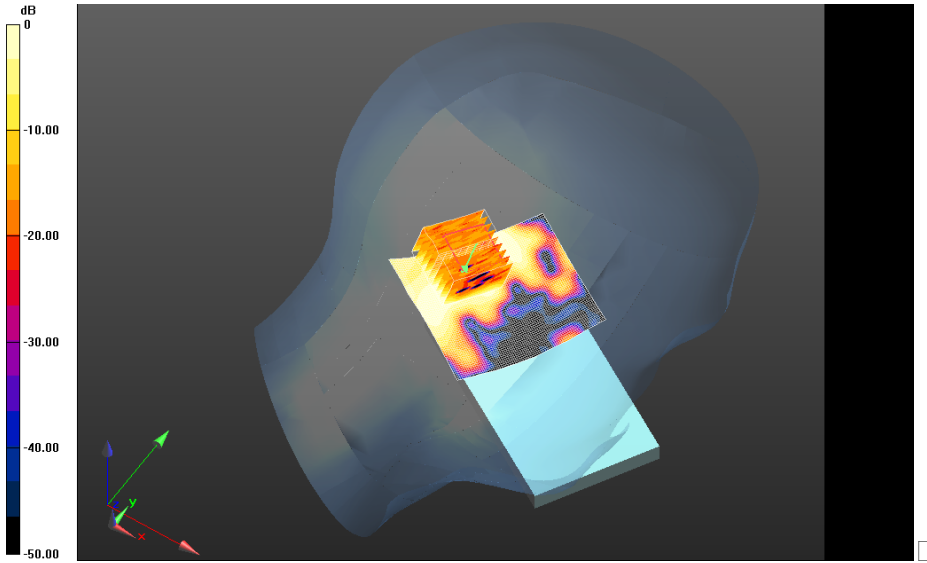

0 dB = 0.224 W/kg = -6.50 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 101(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 1/14/2013 11:32:11 AM

Test Laboratory: RIM Testing Services

LeftHeadSide_802.11a_Chan149

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0BA5

Communication System: 802.11a ; Frequency: 5745 MHz

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.438$ S/m; $\epsilon_r = 34.861$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.12, 4.12, 4.12); Calibrated: 11/14/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Left-Hand-Side HSL 5800 MHz/Touch Position -
802.11a_chan149_Upper_bandII_amb_temp_23.7C_liq_temp_23C/Area
Scan (101x151x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.204 W/kg

**Left-Hand-Side HSL 5800 MHz/Touch Position -
802.11a_chan149_Upper_bandII_amb_temp_23.4C_liq_temp_22.6C
2/Zoom Scan (11x15x12)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.311 V/m; Power Drift = 1.03 dB
Peak SAR (extrapolated) = 0.171 W/kg
SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.018 W/kg
Maximum value of SAR (measured) = 0.0907 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

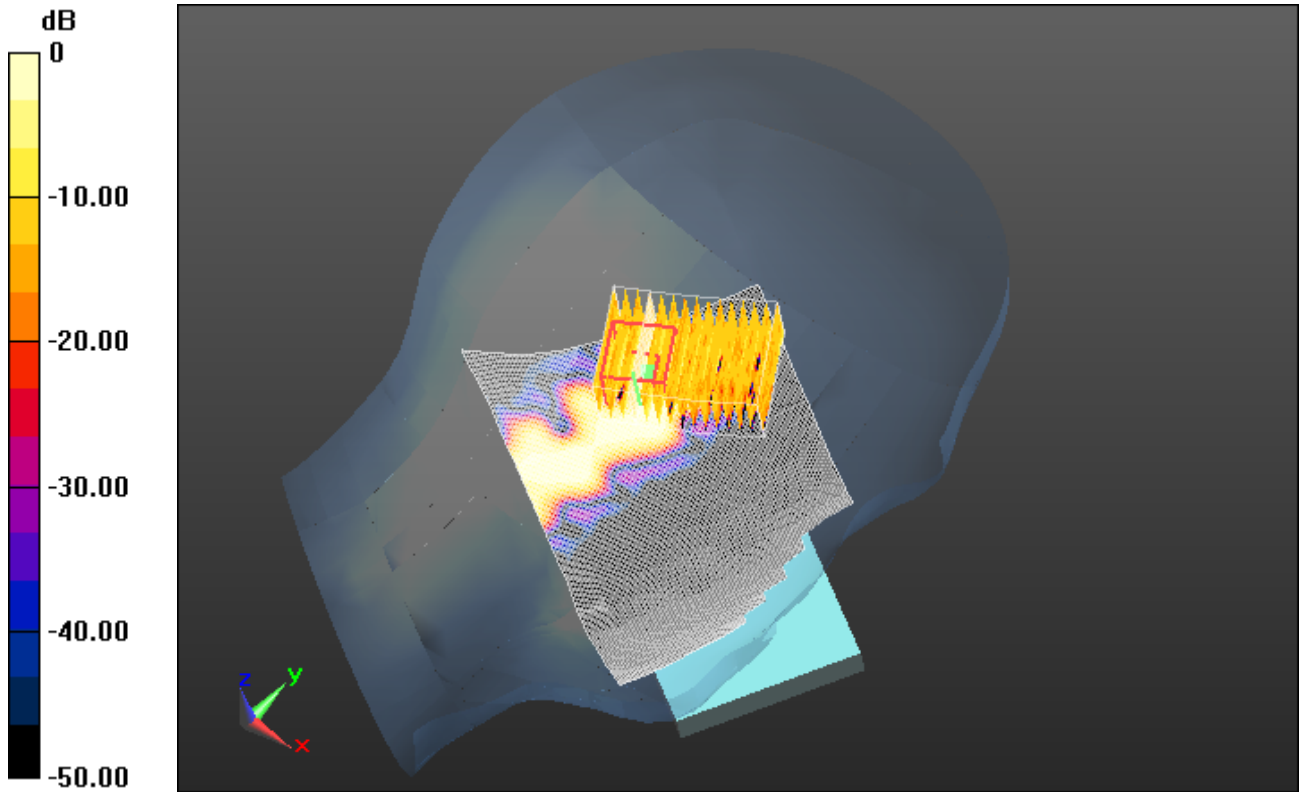

0 dB = 0.0907 W/kg = -10.42 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 103(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Date/Time: 2/27/2013 2:52:04 PM

Test Laboratory: RIM Testing Services

Head_SAR_802.11a_Rev3_02

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: 802.11a ; Frequency: 5520 MHz
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 34.126$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.28, 4.28, 4.28); Calibrated: 11/14/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASYS2 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Right-Hand-Side HSL 5500 MHz/Touch Position -
802.11a_chan104_Upper_bandI_amb_temp_23.4C_liq_temp_22.6C/Area
Scan (81x71x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.132 W/kg

**Right-Hand-Side HSL 5500 MHz/Touch Position -
802.11a_chan104_Upper_bandI_amb_temp_23.4C_liq_temp_22.6C/Zoom
Scan (9x9x12)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 3.619 V/m; Power Drift = 0.25 dB
Peak SAR (extrapolated) = 0.239 W/kg
SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.015 W/kg
Maximum value of SAR (measured) = 0.0753 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 26, 2012- Feb 28, 2013


Test Report No
RTS-6026-1302-18

FCC ID:
L6ARFN80UW

IC
2503A-RFN80UW

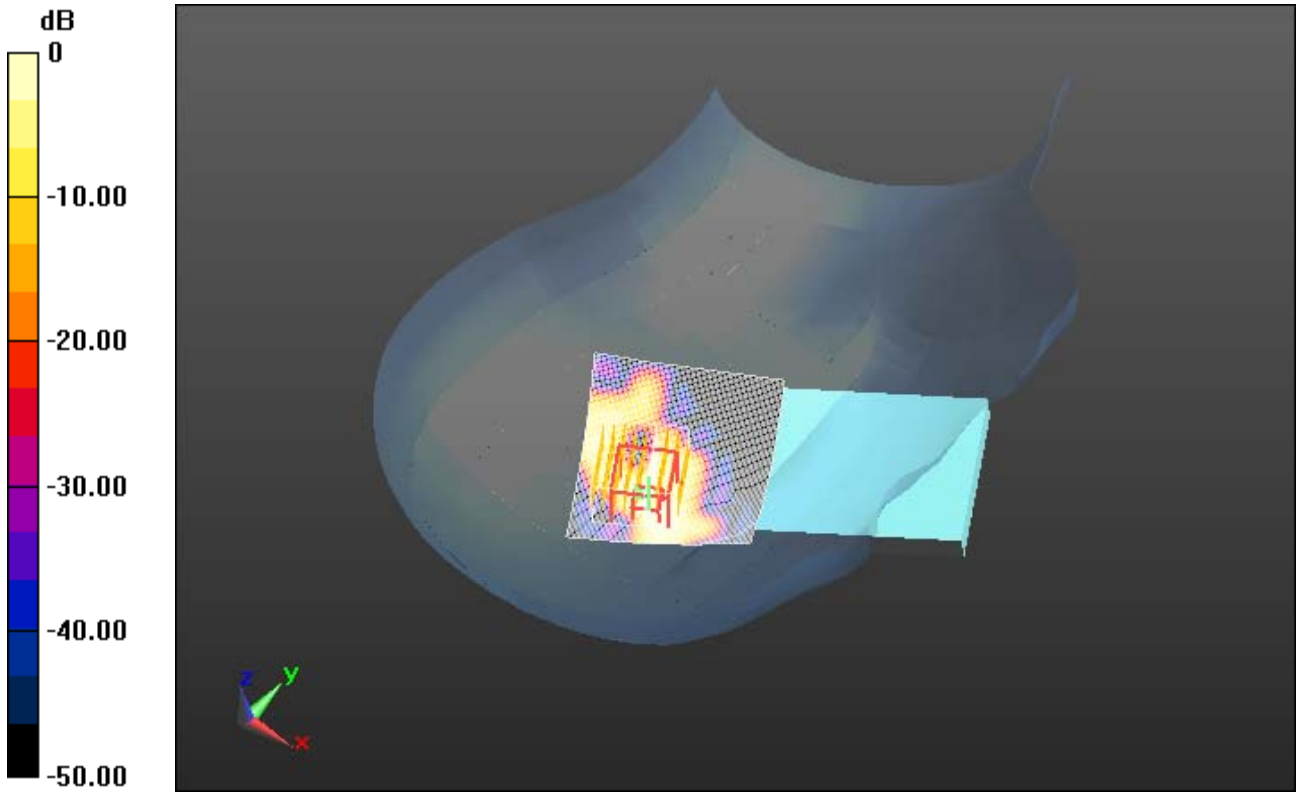

0 dB = 0.0753 W/kg = -11.23 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RFN81UW SAR Report			Page 105(105)
	Author Data Andrew Becker	Dates of Test Nov 26, 2012- Feb 28, 2013	Test Report No RTS-6026-1302-18	FCC ID: L6ARFN80UW

Z axis plot for the worst case head configuration

