

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 1(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

APPENDIX C1: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 2(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

LTE 17

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 3(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/17/2012 4:34:23 PM

Test Laboratory: RIM Testing Services

Body_SAR_LTE_17_15mm_back

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0AD9

Communication System: LTE_Band 17; Frequency: 710 MHz

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.917 \text{ mho/m}$; $\epsilon_r = 54.177$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Body_worn_SAR/15mm_Spacer_Device_Back_LTE_17_QPSK_RB1_Offsets49_Amb_Temp_23.5C_Liq_Temp_21.8C/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Reference Value = 19.368 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (interpolated) = 0.538 mW/g

Body_worn_SAR/15mm_Spacer_Device_Back_LTE_17_QPSK_RB1_Offsets49_Amb_Temp_23.5C_Liq_Temp_21.8C/Zoom Scan (5x5x7)


(6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 19.368 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.6320


SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 0.526 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 4(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

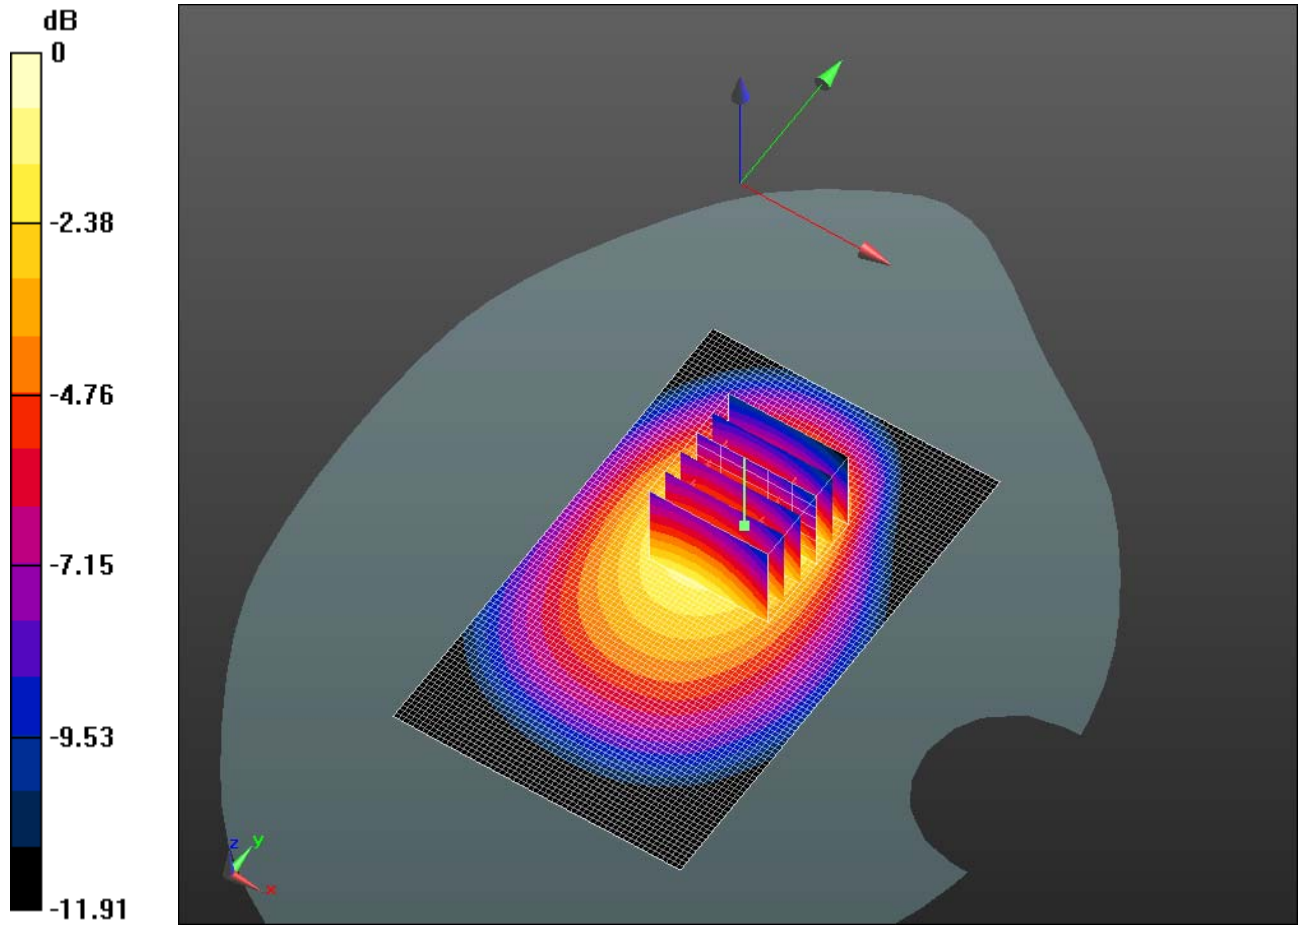

0 dB = 0.530mW/g = -5.51 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 5(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/17/2012 4:19:47 PM

Test Laboratory: RIM Testing Services

Body_SAR_LTE_17_Holster_back

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0AD9

Communication System: LTE_Band 17; Frequency: 710 MHz

Medium parameters used: $f = 710$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 54.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Body_worn_SAR/Holster_Device_Back_LTE_17_QPSK_RB1_Offset49_Amb_Temp_23.5C_Liq_Temp_21.8C/Area Scan (61x61x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Reference Value = 18.285 V/m; Power Drift = 0.04 dB

Fast SAR: SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (interpolated) = 0.366 mW/g



Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

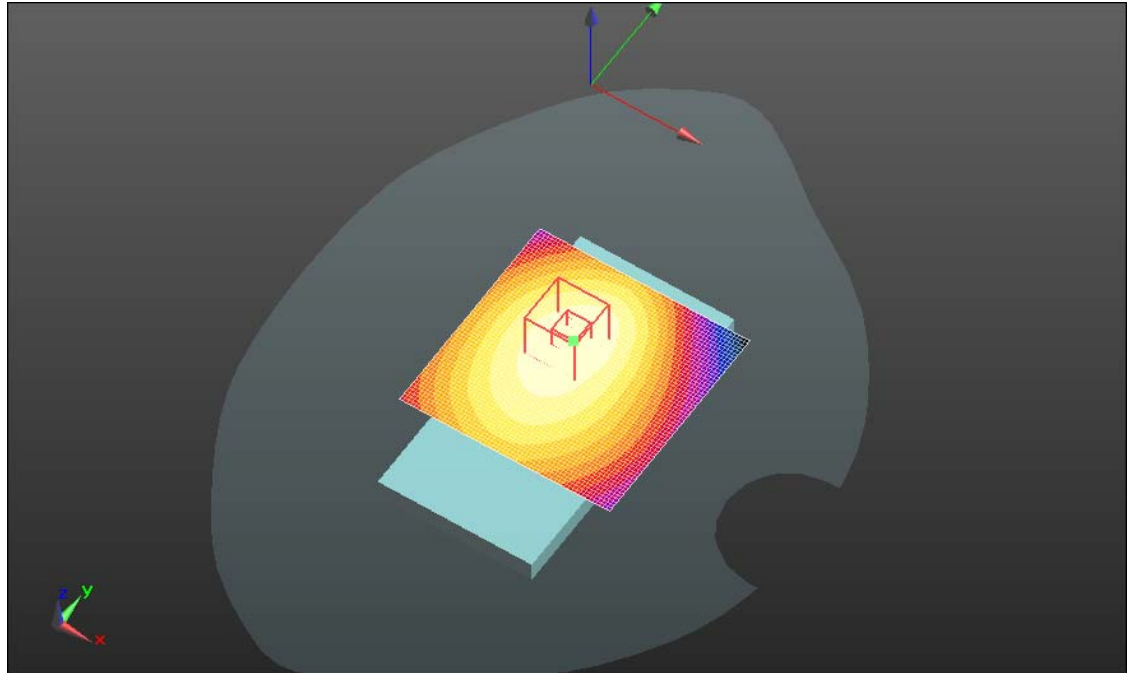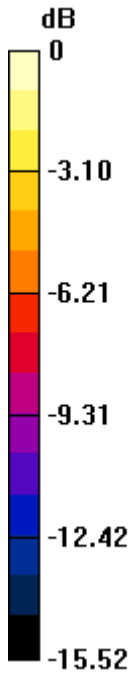

0 dB = 0.370mW/g = -8.64 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 7(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/17/2012 4:25:50 PM

Test Laboratory: RIM Testing Services

Body_SAR_LTE_17_Holster_Front

DUT: BlackBerry Smartphone; Type: Sample; Serial: 25CF0AD9

Communication System: LTE_Band 17; Frequency: 710 MHz

Medium parameters used: $f = 710$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 54.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.27, 6.27, 6.27); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Body_worn_SAR/Holster_Device_Front_LTE_17_QPSK_RB1_Offset49_


Amb_Temp_23.2C_Liq_Temp_22.0C/Area Scan (61x61x1): Measurement


grid: $dx=15$ mm, $dy=15$ mm

Reference Value = 17.064 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (interpolated) = 0.304 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 8(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

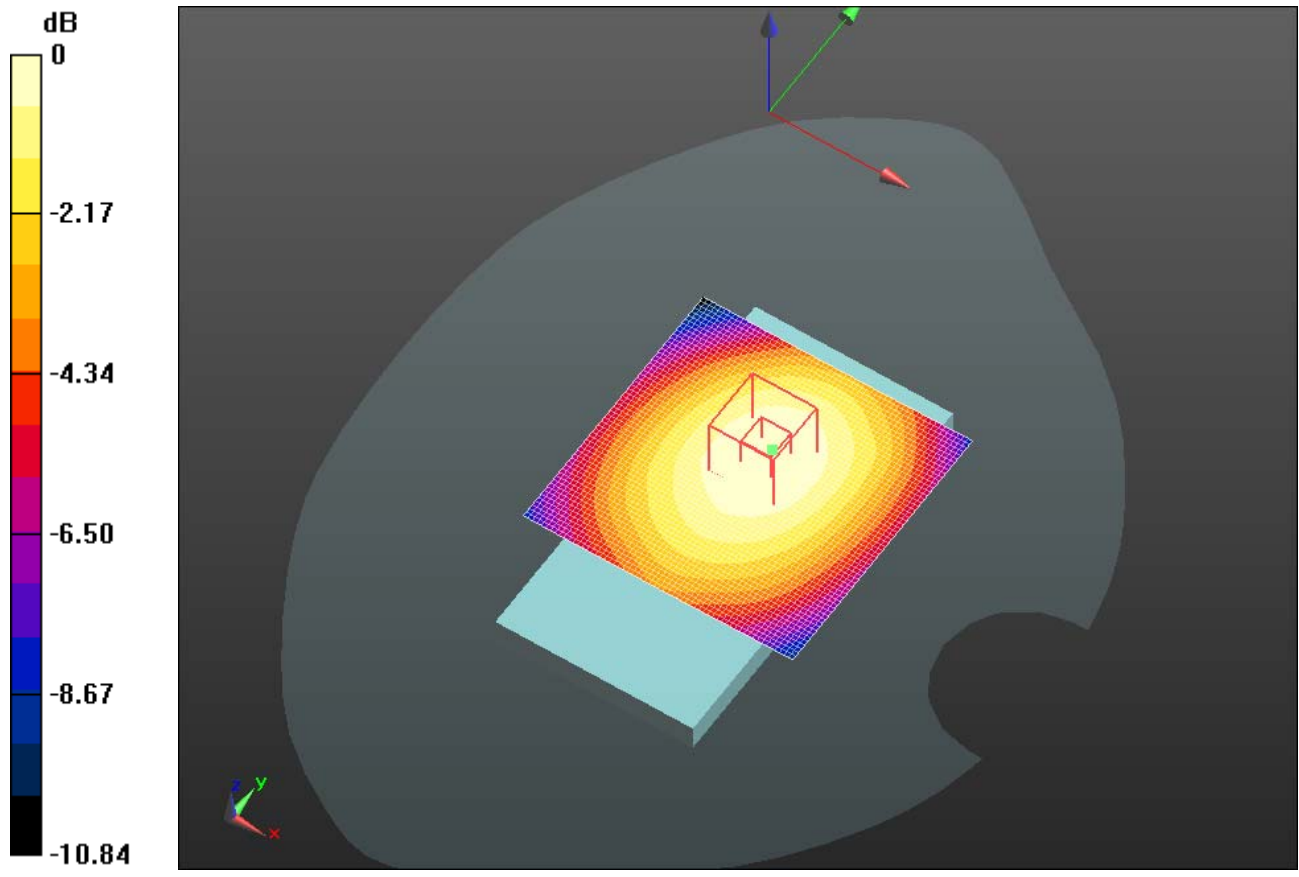

0 dB = 0.300mW/g = -10.46 dB mW/g



Document
Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report

Page
9(116)

Author Data
Andrew Becker


Dates of Test
Nov 22 2012 – Feb 28 2013

Test Report No
RTS-6026-1303-02

FCC ID:
L6ARFL110LW
L6ARFP120LW

IC
2503A-RFL110LW
2503A-RFP120LW

LTE 5

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 10(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 11:10:52 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_LTE_5_mid_chan_QPSK_RB_1_Offset_0_amb_temp_23.2_liq_temp_21.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 835_Band 5; Frequency: 836.5 MHz

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.397$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/15mm_Spacer_Back_LTE_5_mid_chan_QPSK_RB_1_Offset_0_amb_temp_23.2_liq_temp_21.5C.da52/Area Scan (61x111x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Reference Value = 23.900 V/m; Power Drift = -0.08 dB

Fast SAR: SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.416 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.661 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

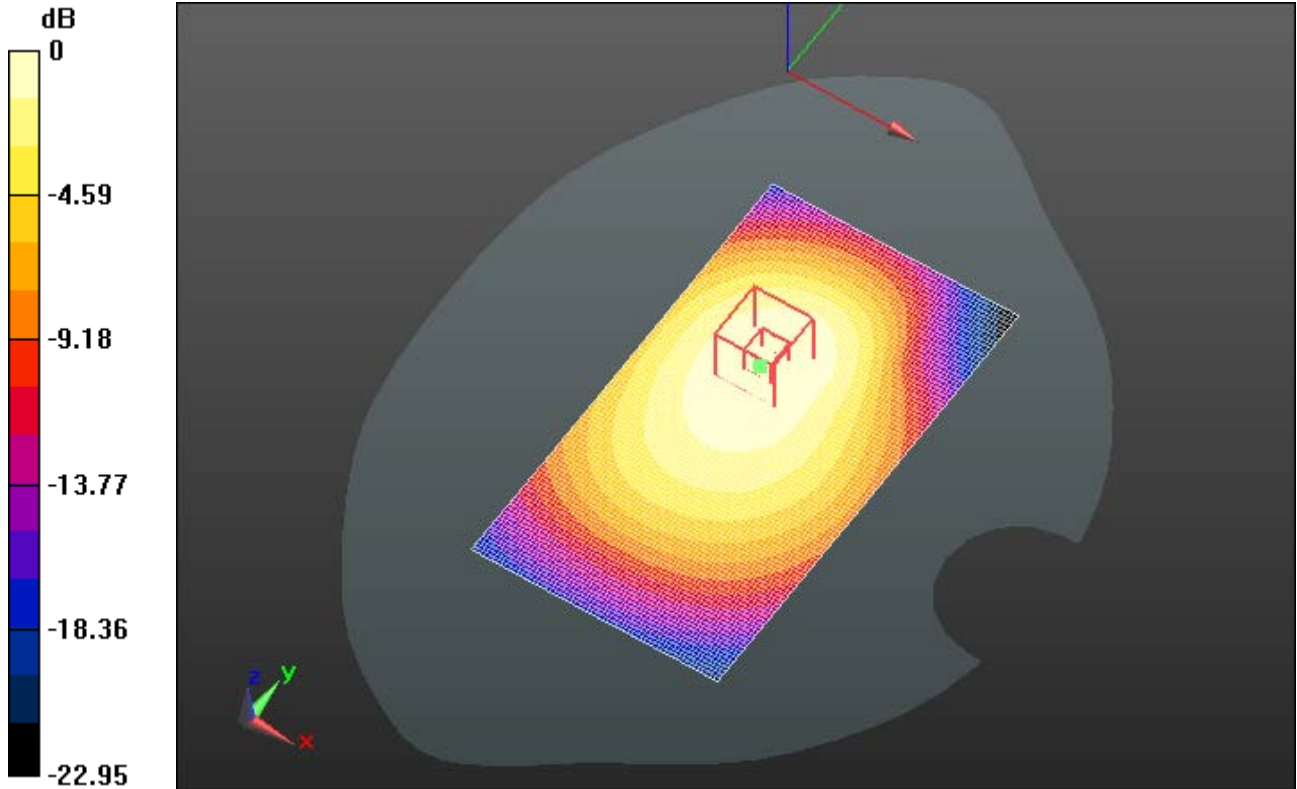

0 dB = 0.660mW/g = -3.61 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 12(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 11:28:10 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_LTE_5_mid_chan_QPSK_RB_1_Offset_0_amb_t
emp_23.6_liq_temp_21.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 835_Band 5; Frequency: 836.5 MHz

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.397$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Vertical_Holster_Back_LTE_5_mid_chan_QPSK_RB_1_Offset_0_amb_temp_23.6_liq_temp_21.2C.da52/Area Scan (61x81x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Reference Value = 24.470 V/m; Power Drift = 0.03 dB

Fast SAR: SAR(1 g) = 0.517 mW/g; SAR(10 g) = 0.369 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.581 mW/g



Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

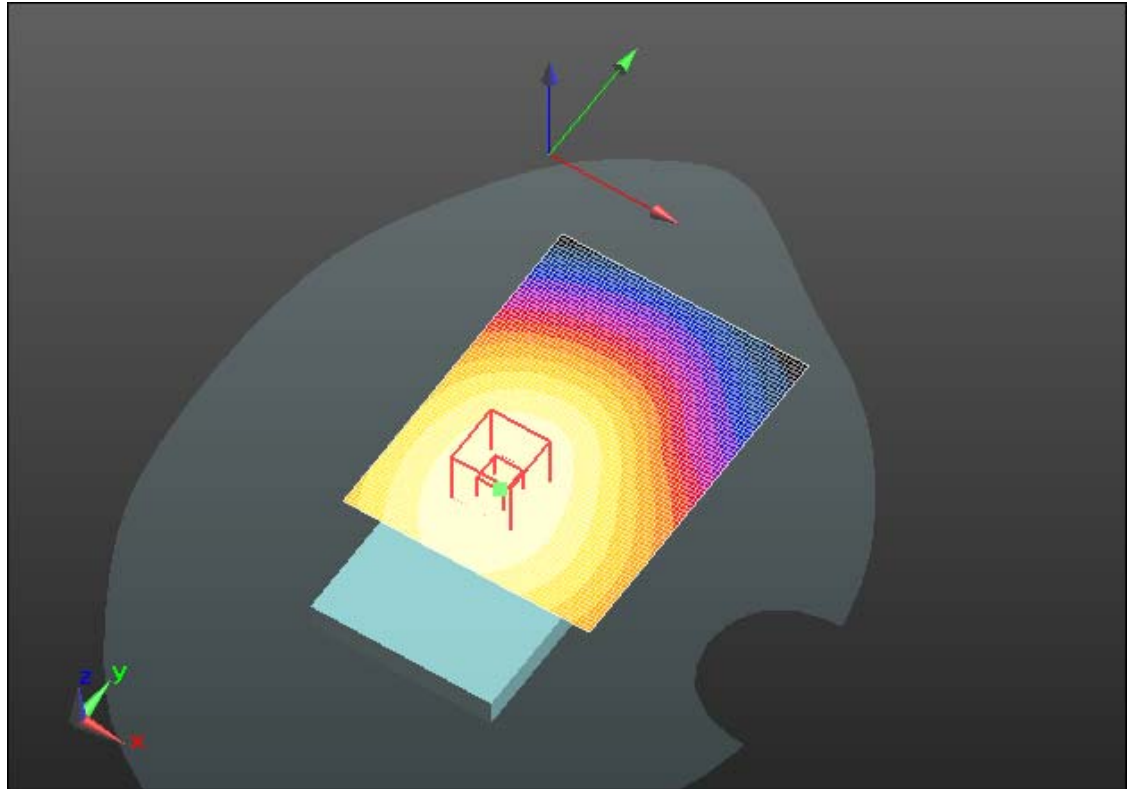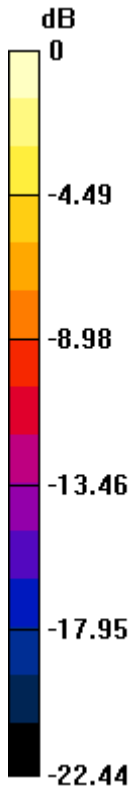

0 dB = 0.580mW/g = -4.73 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 14(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 11:44:42 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Front_LTE_5_mid_chan_QPSK_RB_1_Offset_0_amb_t
emp_23.4_liq_temp_21.0C.da52**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 835_Band 5; Frequency: 836.5 MHz

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.397$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Vertical_Holster_Front_LTE_5_mid_chan_QPSK_RB_1_Offset_0_amb_temp_23.4_liq_temp_21.0C.da52/Area Scan (61x81x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Reference Value = 23.894 V/m; Power Drift = 0.06 dB

Fast SAR: SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.345 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.539 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW


IC 2503A-RFL110LW 2503A-RFP120LW
--

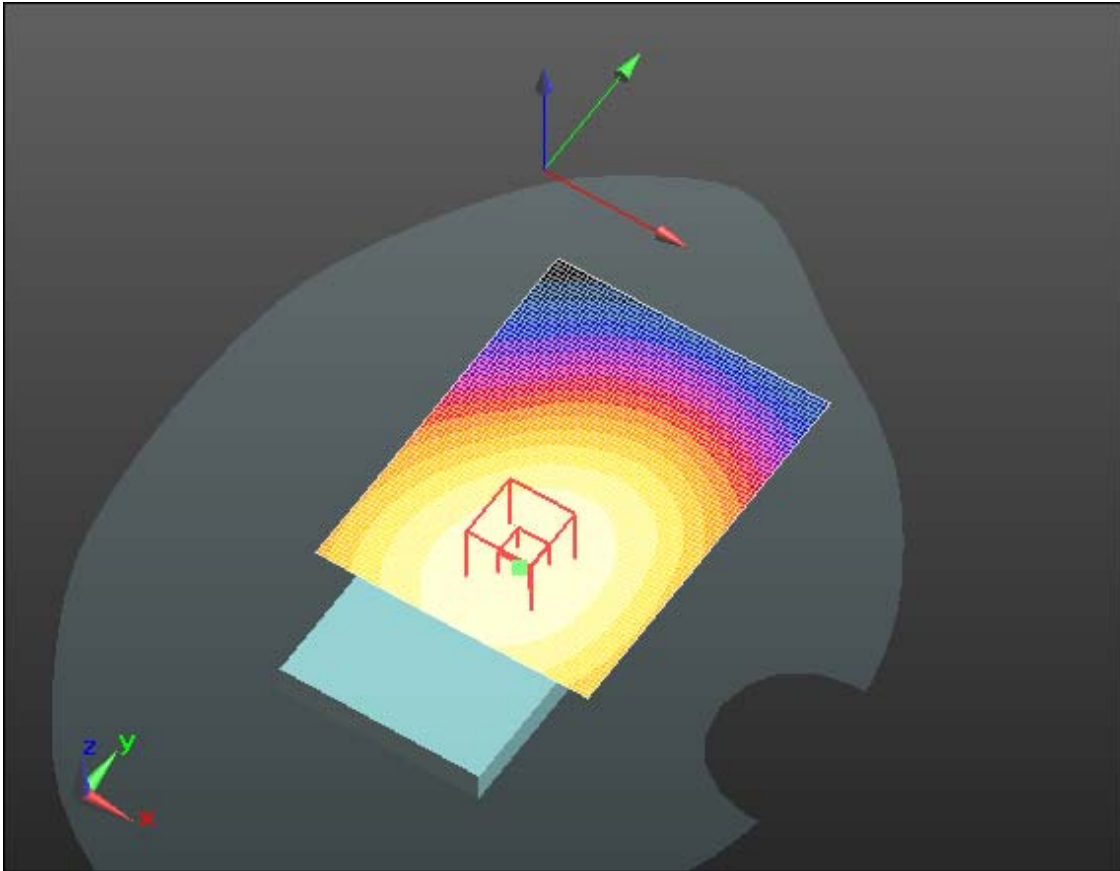

0 dB = 0.540mW/g = -5.35 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 16(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

EDGE 850

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 17(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 7:19:11 AM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_GPRS850_mid_chan_amb_temp_23.4_liq_temp_2 2.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 54.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.643 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.952 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.7620

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.435 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.645 mW/g



Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

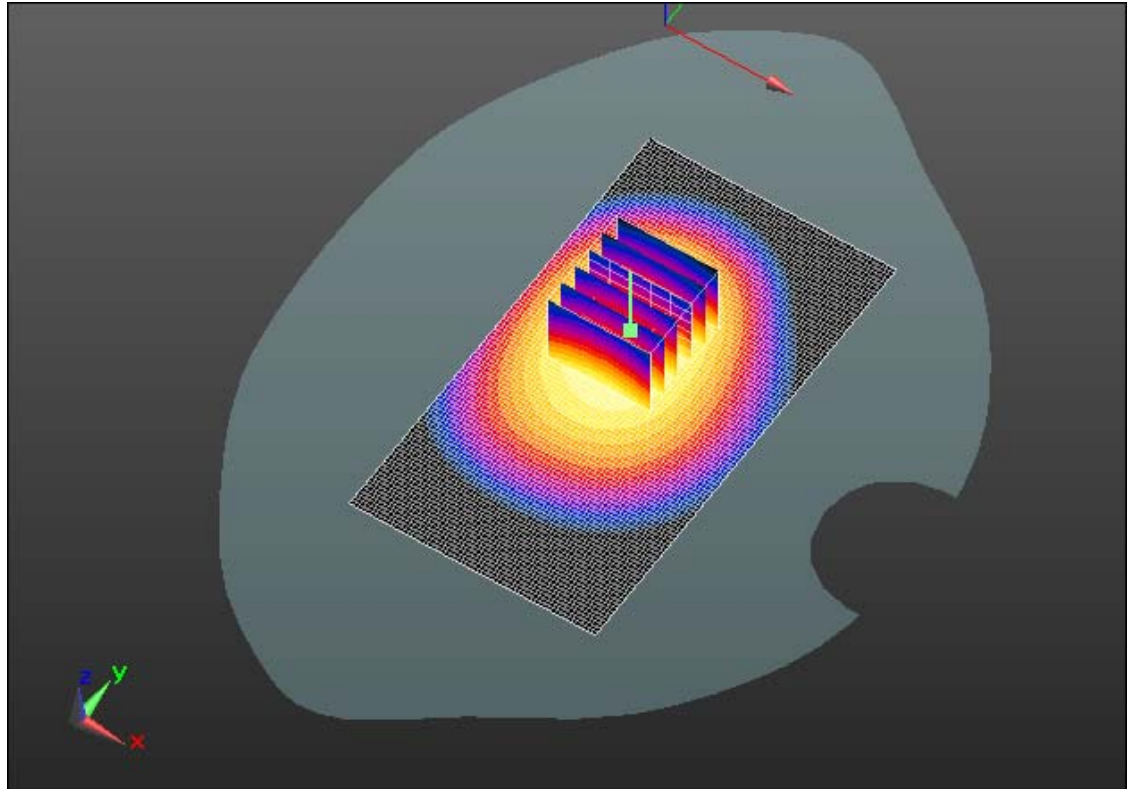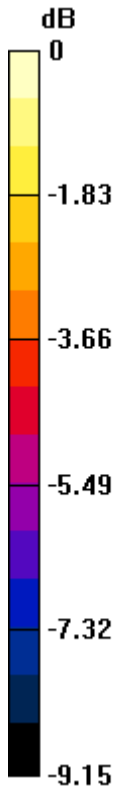

0 dB = 0.650mW/g = -3.74 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 19(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 7:41:15 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_GPRS850_mid_chan_amb_temp_23.4_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 54.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x61x1): Measurement grid:


$dx=15$ mm, $dy=15$ mm


Reference Value = 24.396 V/m; Power Drift = 0.10 dB

Fast SAR: SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.365 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.572 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 20(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

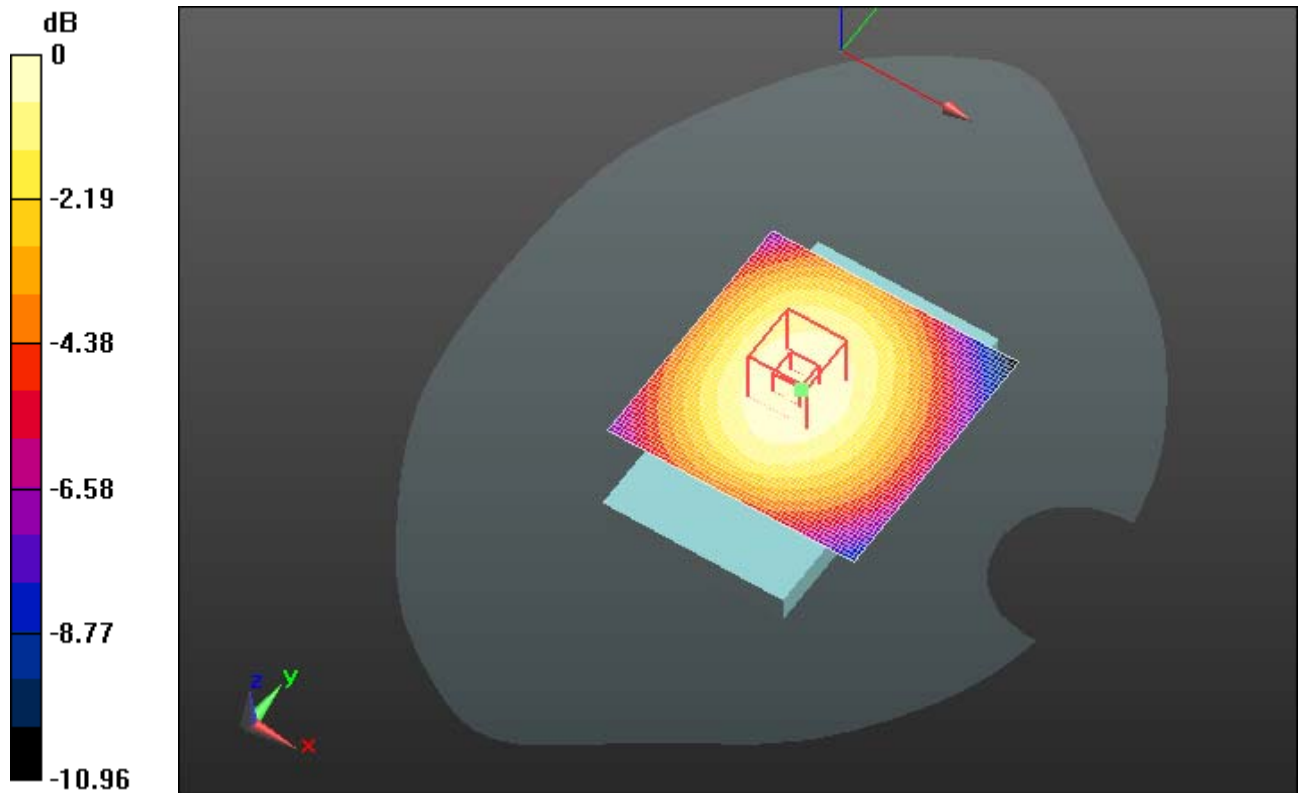

0 dB = 0.570mW/g = -4.88 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 21(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 7:51:26 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Front_GPRS850_mid_chan_amb_temp_23.3_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: GPRS 850; Frequency: 836.8 MHz

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 54.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x61x1): Measurement grid:


$dx=15$ mm, $dy=15$ mm


Reference Value = 23.881 V/m; Power Drift = 0.04 dB

Fast SAR: SAR(1 g) = 0.486 mW/g; SAR(10 g) = 0.348 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.546 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 22(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

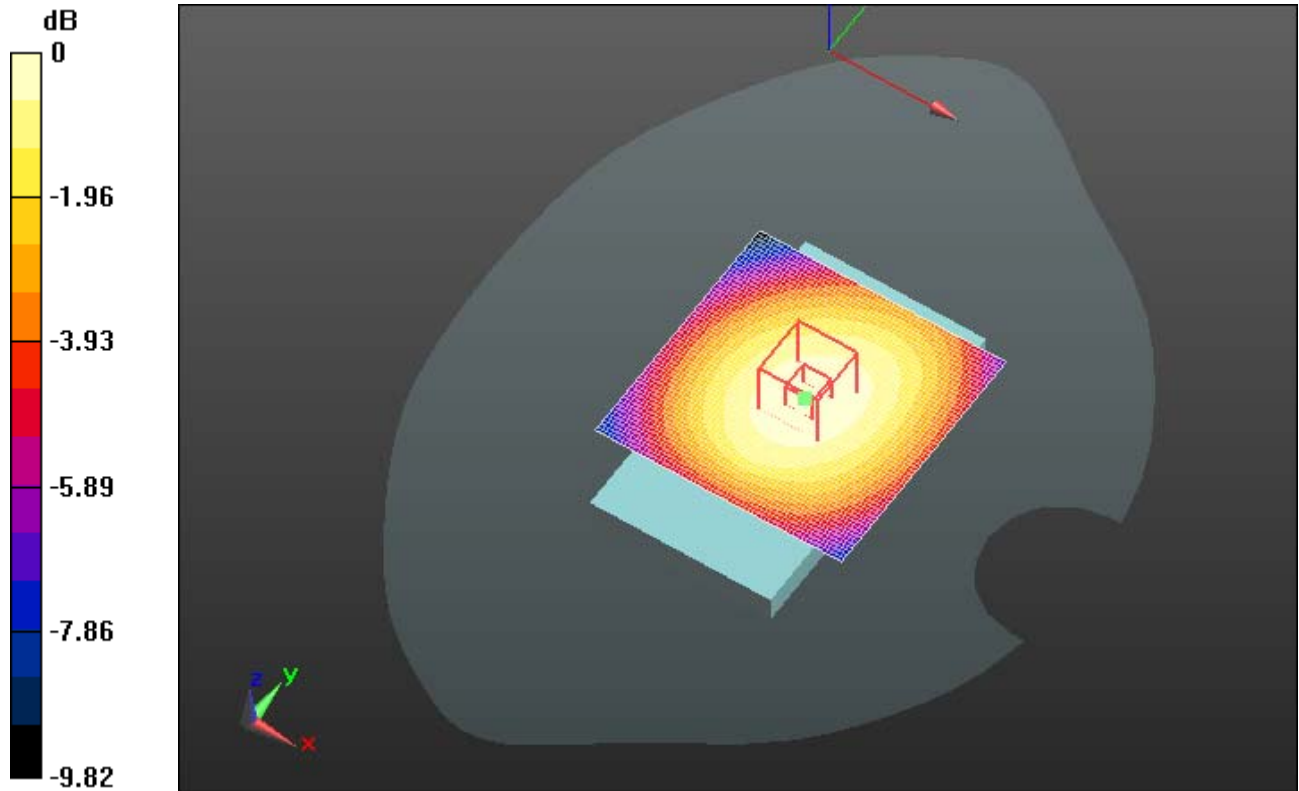

0 dB = 0.550mW/g = -5.19 dB mW/g



Document
Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report

Page
23(116)

Author Data
Andrew Becker

Dates of Test
Nov 22 2012 – Feb 28 2013


Test Report No
RTS-6026-1303-02

FCC ID:
L6ARFL110LW
L6ARFP120LW

IC
2503A-RFL110LW
2503A-RFP120LW

UMTS Band

V

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 24(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 11:50:20 AM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_UMTS_Band_V_mid_chan_amb_temp_23.3_liq_temp_221.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: WCDMA FDD V; Communication System Band: UMTS band V; Frequency: 836.4 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.399$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.854 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 27.636 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.9690
SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.557 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.833 mW/g



Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

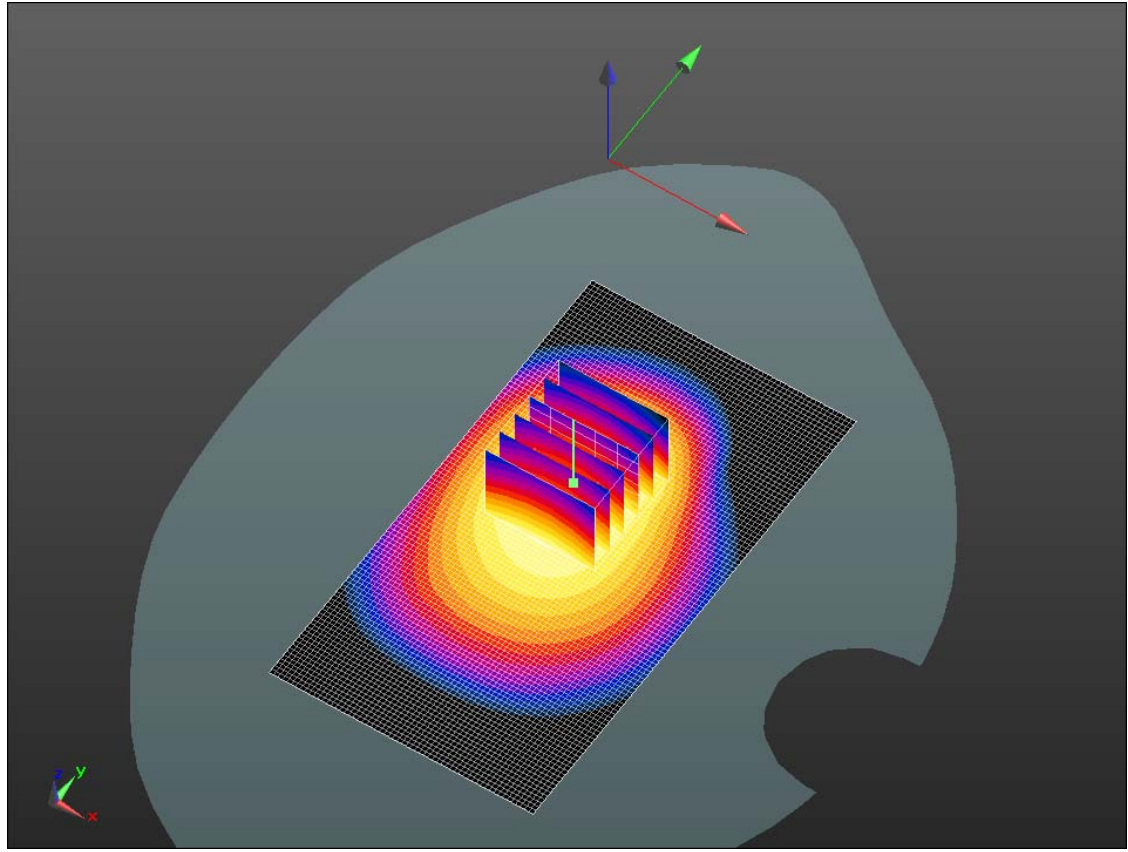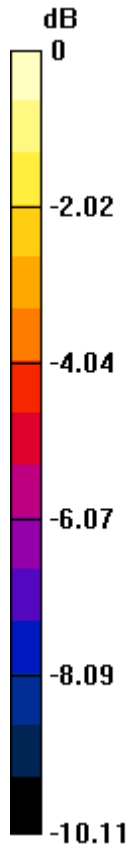

0 dB = 0.830mW/g = -1.62 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 26(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 8:19:28 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_UMTS_Band_V_mid_chan_amb_temp_23.3_liq_t emp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: WCDMA FDD V; Frequency: 836.4 MHz
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.399$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)


Configuration/Touch position -/Area Scan (61x61x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm


Reference Value = 26.934 V/m; Power Drift = -0.04 dB

Fast SAR: SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.445 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.697 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 27(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

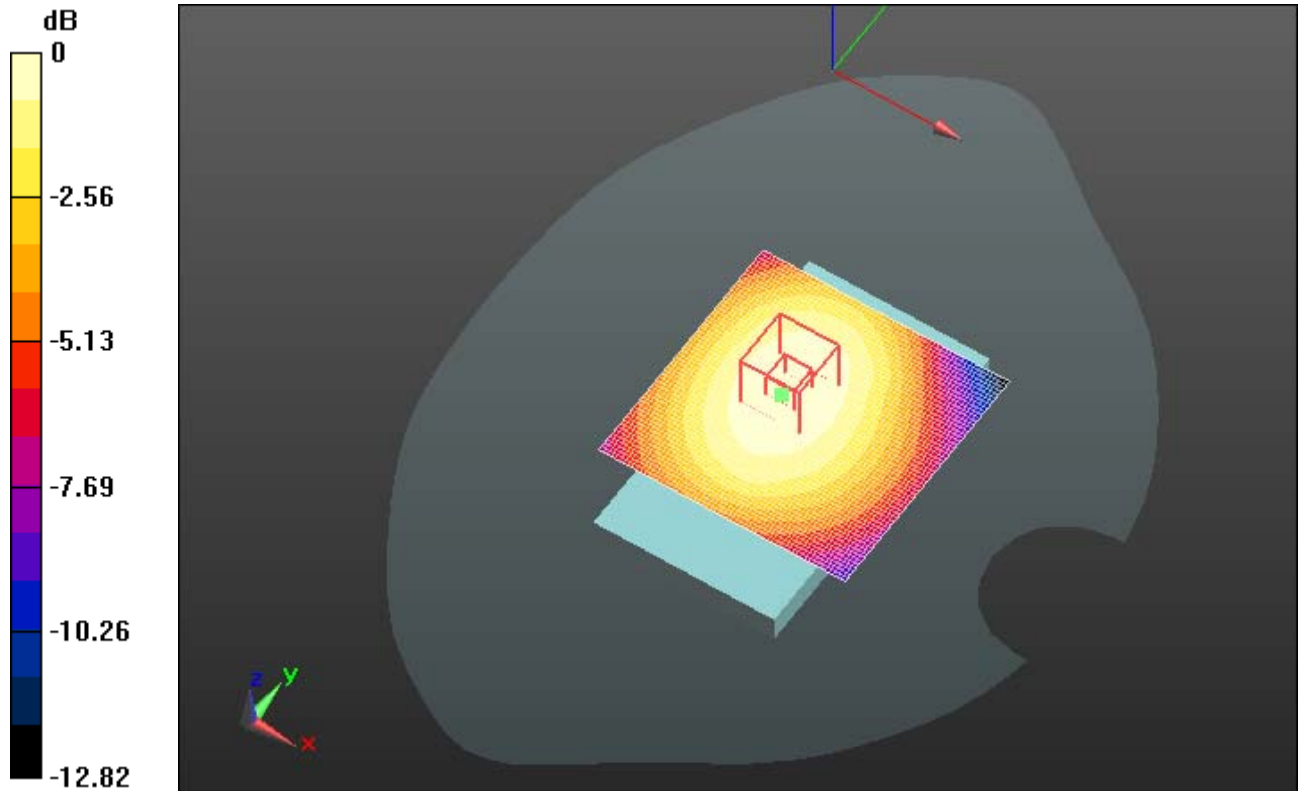

0 dB = 0.700mW/g = -3.10 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 28(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/10/2012 8:08:40 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Front_UMTS_Band_V_mid_chan_amb_temp_23.3_liq_t emp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: WCDMA FDD V; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.07, 6.07, 6.07); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x61x1): Measurement grid:


$dx=15$ mm, $dy=15$ mm


Reference Value = 26.354 V/m; Power Drift = -0.17 dB

Fast SAR: SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.413 mW/g


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.644 mW/g


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 29(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

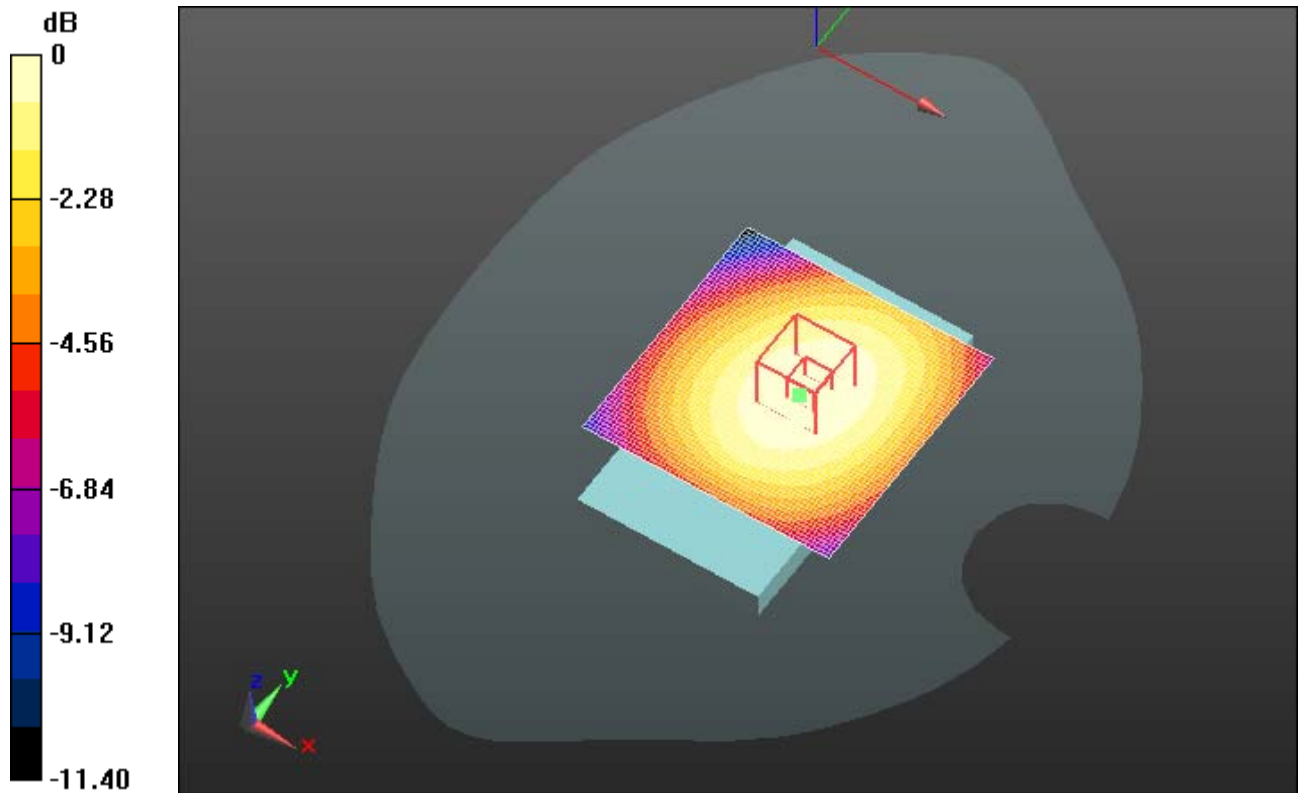

0 dB = 0.640mW/g = -3.88 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 30(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

LTE 4

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 31(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/5/2012 12:59:14 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_LTE_4_high_chan_QPSK_RB_1_Offset_99_amb_t
emp_23.7_liq_temp_21.5C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 1800_Band 4; Frequency: 1745 MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.542$ mho/m; $\epsilon_r = 51.637$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.823 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 10.054 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.1130

SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.419 mW/g

Maximum value of SAR (measured) = 0.802 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

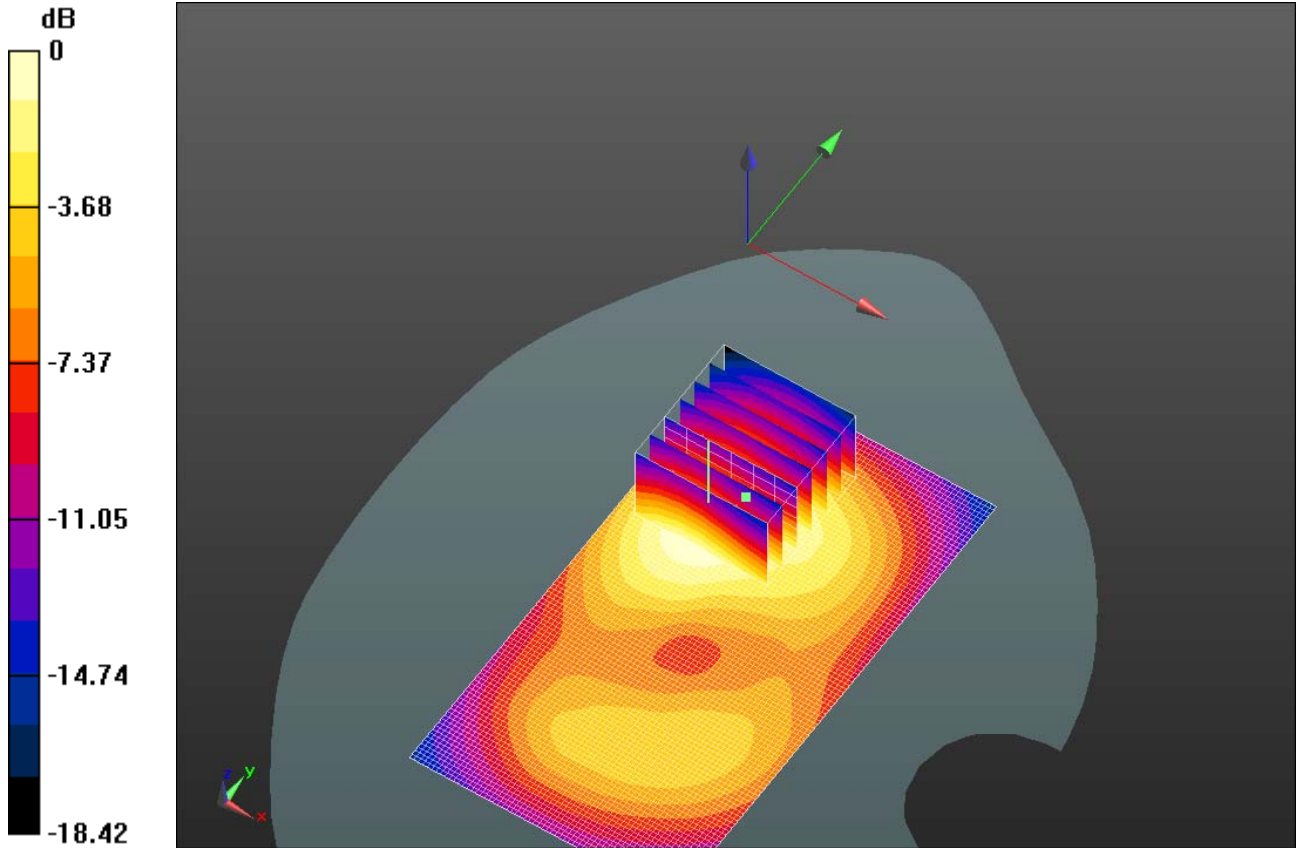

0 dB = 0.800mW/g = -1.94 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 33(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/5/2012 2:10:42 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_LTE_4_high_chan_QPSK_RB_1_Offset_99_amb
_temp_23.4_liq_temp_21.5C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 1800_Band 4; Frequency: 1745 MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.542$ mho/m; $\epsilon_r = 51.637$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.384 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 7.979 V/m; Power Drift = 0.0083 dB

Peak SAR (extrapolated) = 0.5130


SAR(1 g) = 0.324 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 34(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

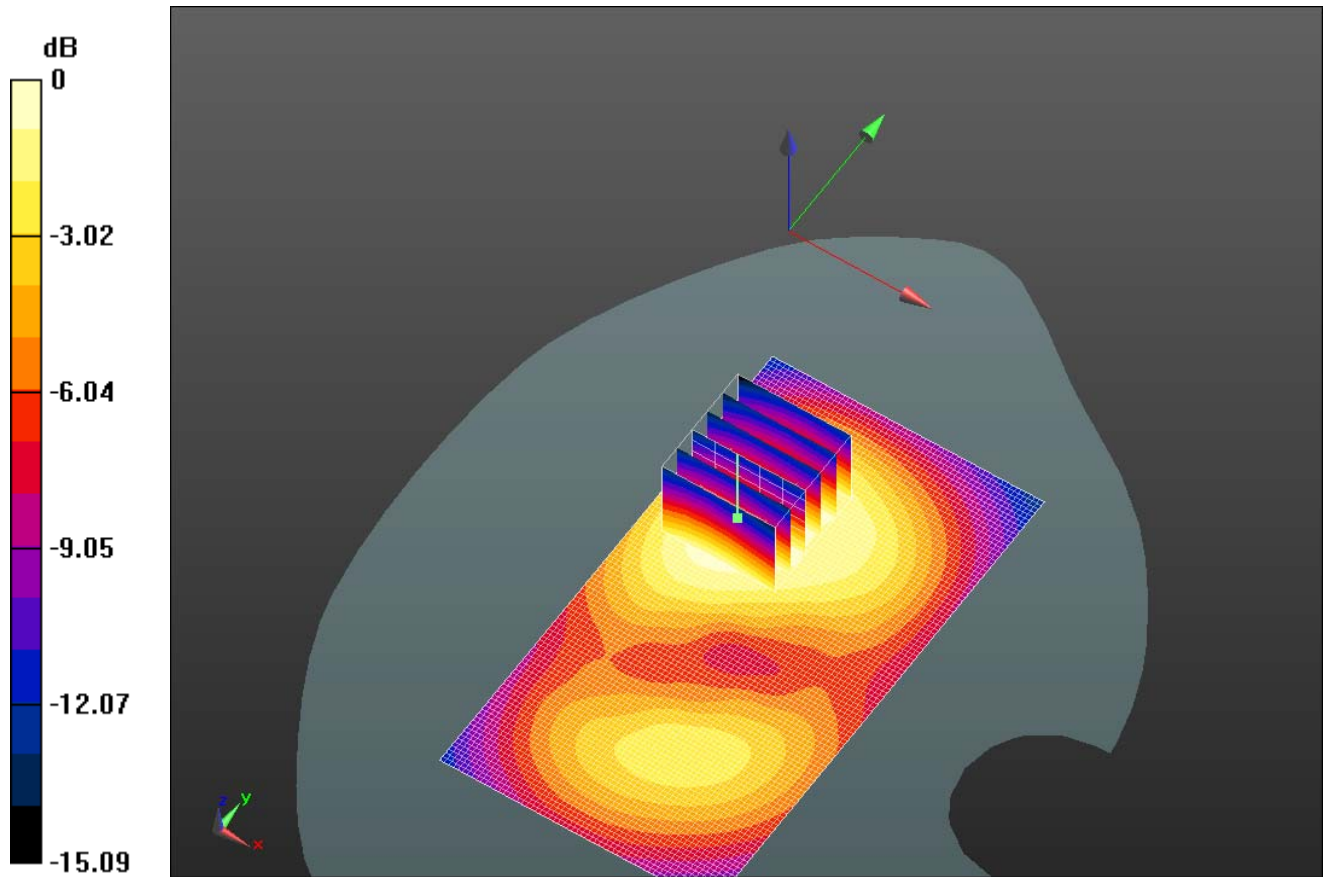

0 dB = 0.380mW/g = -8.40 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 35(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/5/2012 2:32:58 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Front_LTE_4_high_chan_QPSK_RB_1_Offset_99_amb
_temp_23.9_liq_temp_21.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 1800_Band 4; Frequency: 1745 MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.542$ mho/m; $\epsilon_r = 51.637$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.298 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.272 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.3870

SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.287 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW


IC 2503A-RFL110LW 2503A-RFP120LW
--

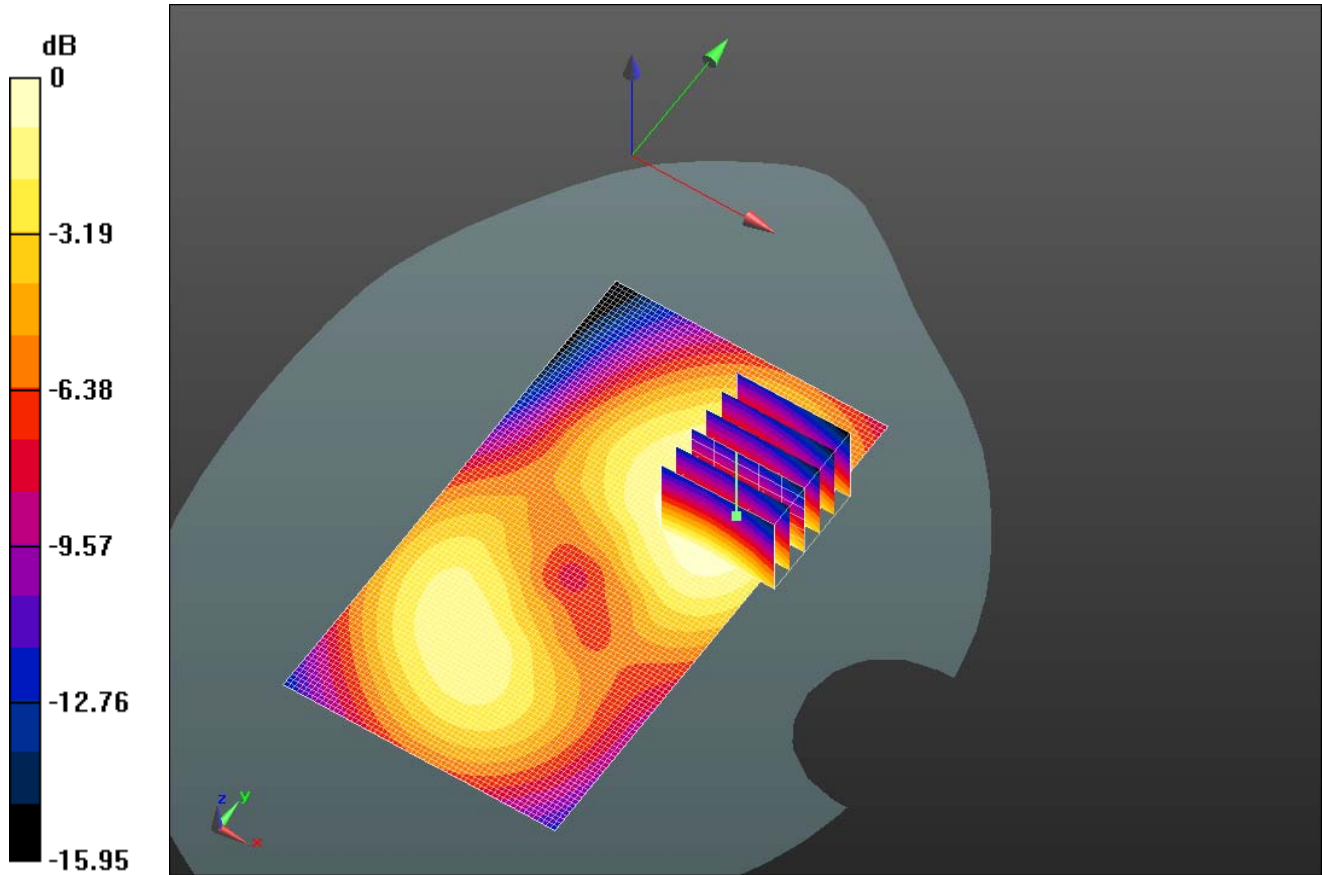

0 dB = 0.290mW/g = -10.75 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 37(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

LTE 2

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 38(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/3/2012 5:21:14 AM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_LTE_2_mid_chan_QPSK_RB_1_Offset_99_amb_t
emp_23.3_liq_temp_21.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 1900_Band 2; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 52.143$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.663 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 7.969 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.8920


SAR(1 g) = 0.556 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.658 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 39(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

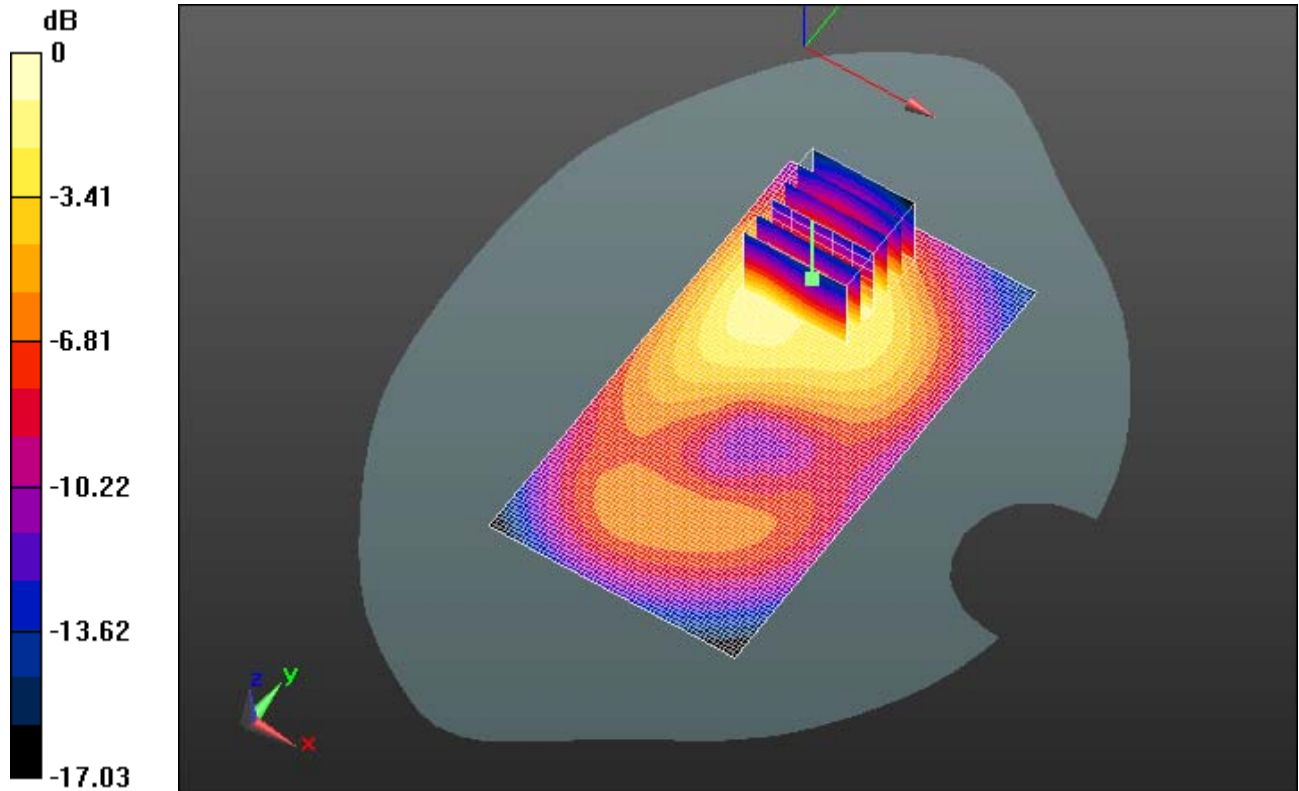

0 dB = 0.660mW/g = -3.61 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 40(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/3/2012 5:48:22 AM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_LTE_2_mid_chan_QPSK_RB_1_Offset_99_amb_
temp_23.6_liq_temp_21.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 1900_Band 2; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 52.143$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.447 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 6.736 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.5970


SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.444 mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 41(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

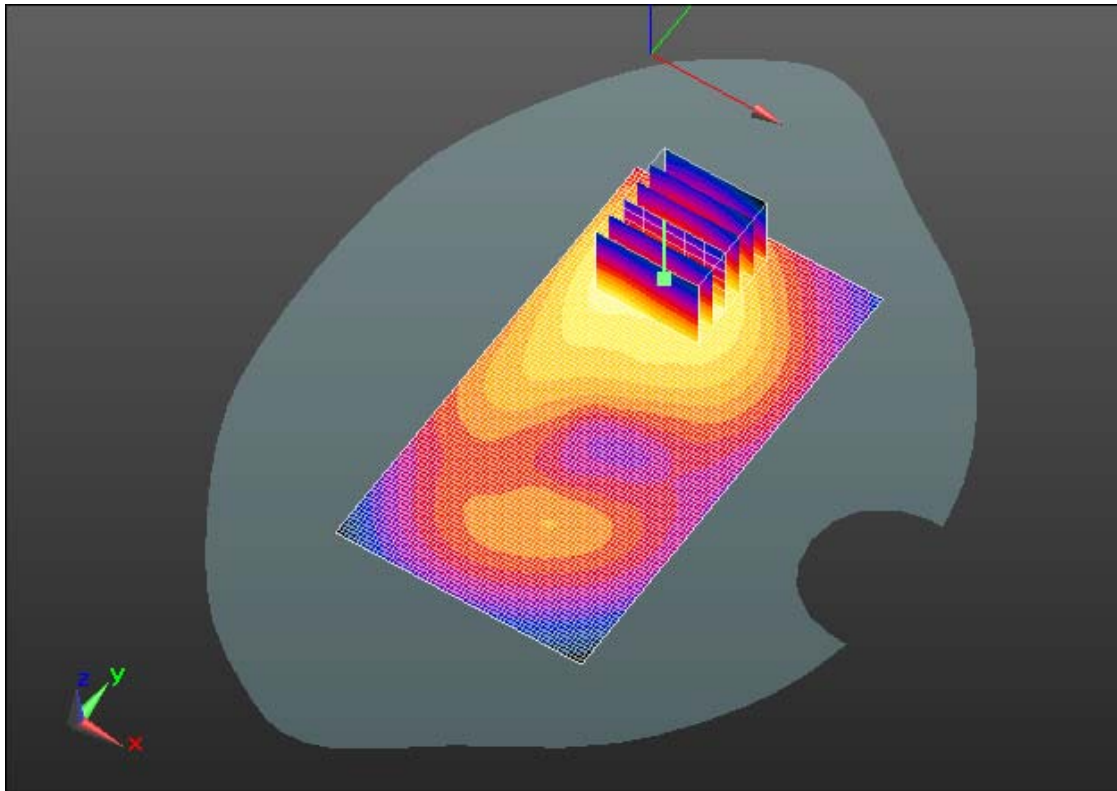

0 dB = 0.440mW/g = -7.13 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 42(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/3/2012 6:07:55 AM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Front_LTE_2_mid_chan_QPSK_RB_1_Offset_99_amb_
temp_23.6_liq_temp_21.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 1900_Band 2; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 52.143$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.272 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.123 V/m; Power Drift = 0.29 dB

Peak SAR (extrapolated) = 0.3610

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.274 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

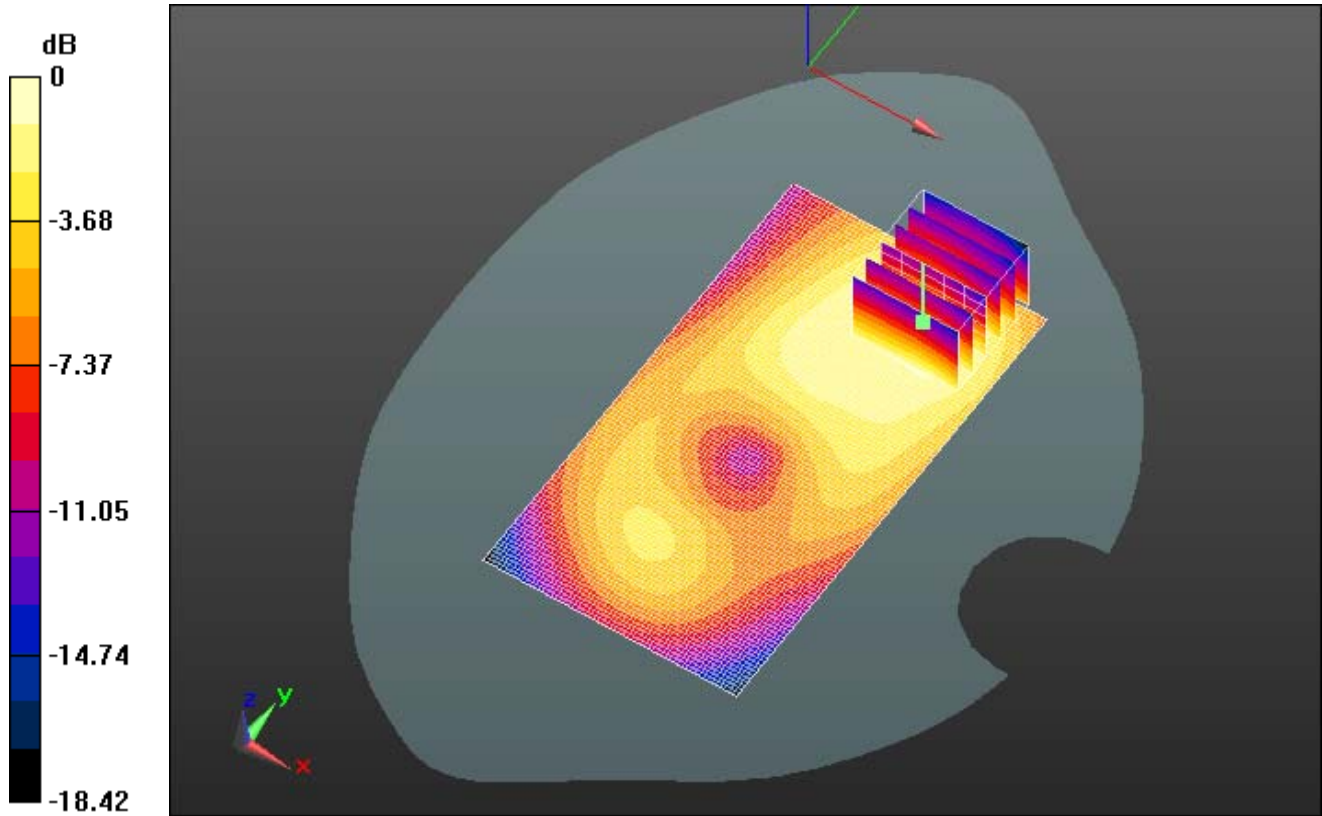

0 dB = 0.270mW/g = -11.37 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 44(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 12/4/2012 5:49:29 AM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_LTE_2_mid_chan_QPSK_RB_1_Offset_99_amb_t
emp_24.5_liq_temp_22.6C_2100**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: LTE 1900_Band 2; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 52.143$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.683 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 8.417 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.8530


SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.315 mW/g

Maximum value of SAR (measured) = 0.637 mW/g


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 45(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

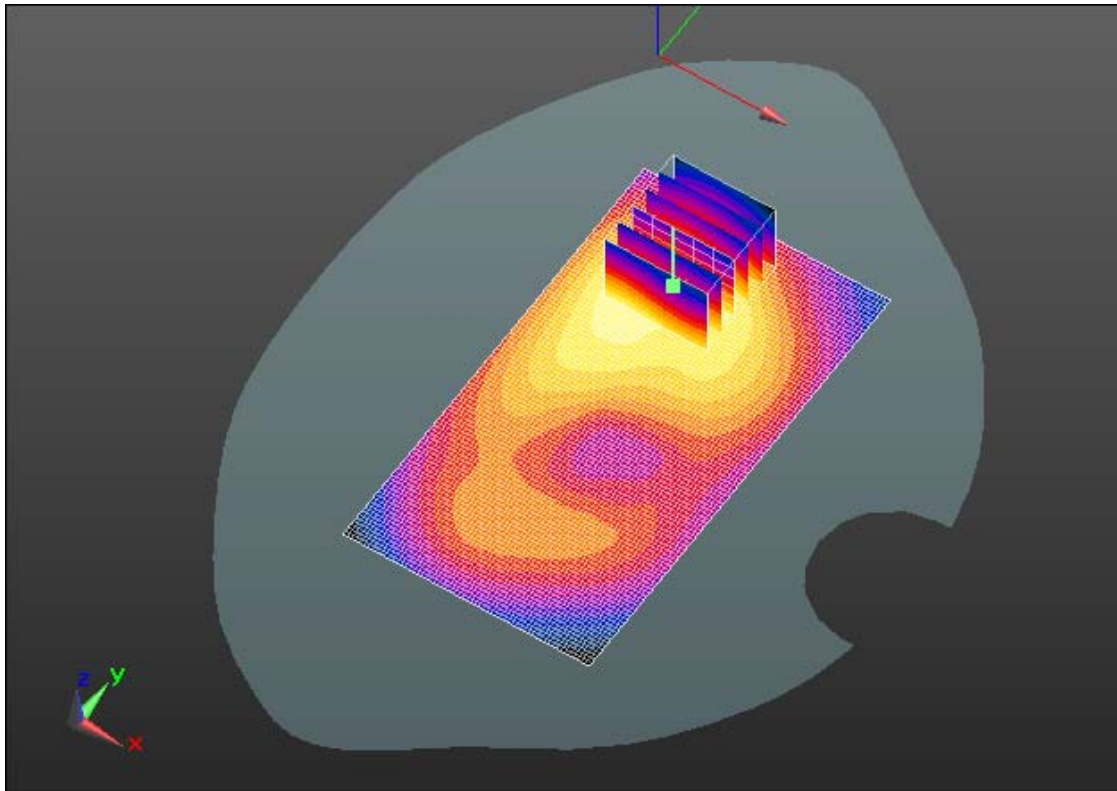

0 dB = 0.640mW/g = -3.88 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 46(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

EDGE 1900

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 47(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/26/2012 10:11:56 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_EDGE1900_mid_chan_amb_temp_23.8_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.499$ mho/m; $\epsilon_r = 50.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.646 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 7.588 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.8190

SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.608 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

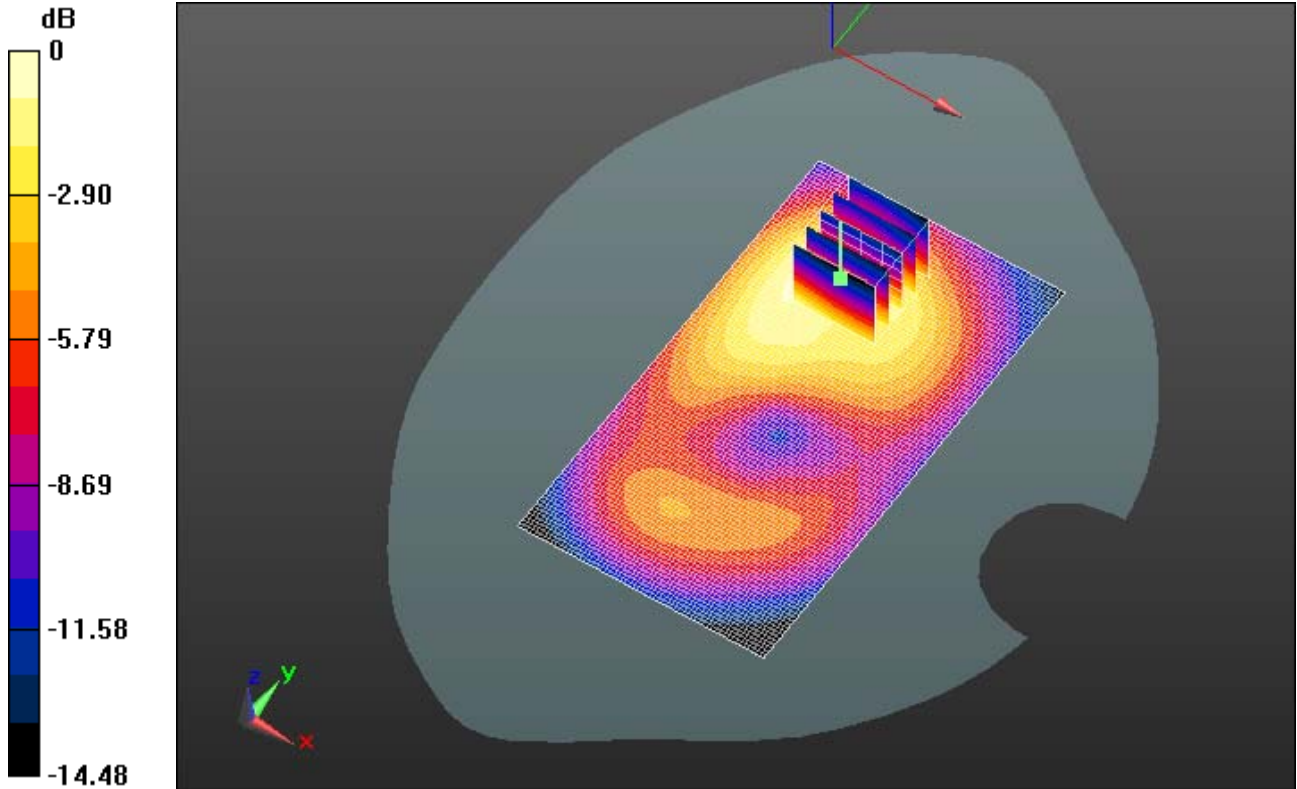

0 dB = 0.610mW/g = -4.29 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 49(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/26/2012 10:31:48 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_EDGE1900_mid_chan_amb_temp_23.8_liq_temp _21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.499$ mho/m; $\epsilon_r = 50.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.430 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 7.067 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.5670

SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.432 mW/g



Author Data
Andrew Becker

Dates of Test
Nov 22 2012 – Feb 28 2013


Test Report No
RTS-6026-1303-02

FCC ID:
**L6ARFL110LW
L6ARFP120LW**

IC
**2503A-RFL110LW
2503A-RFP120LW**

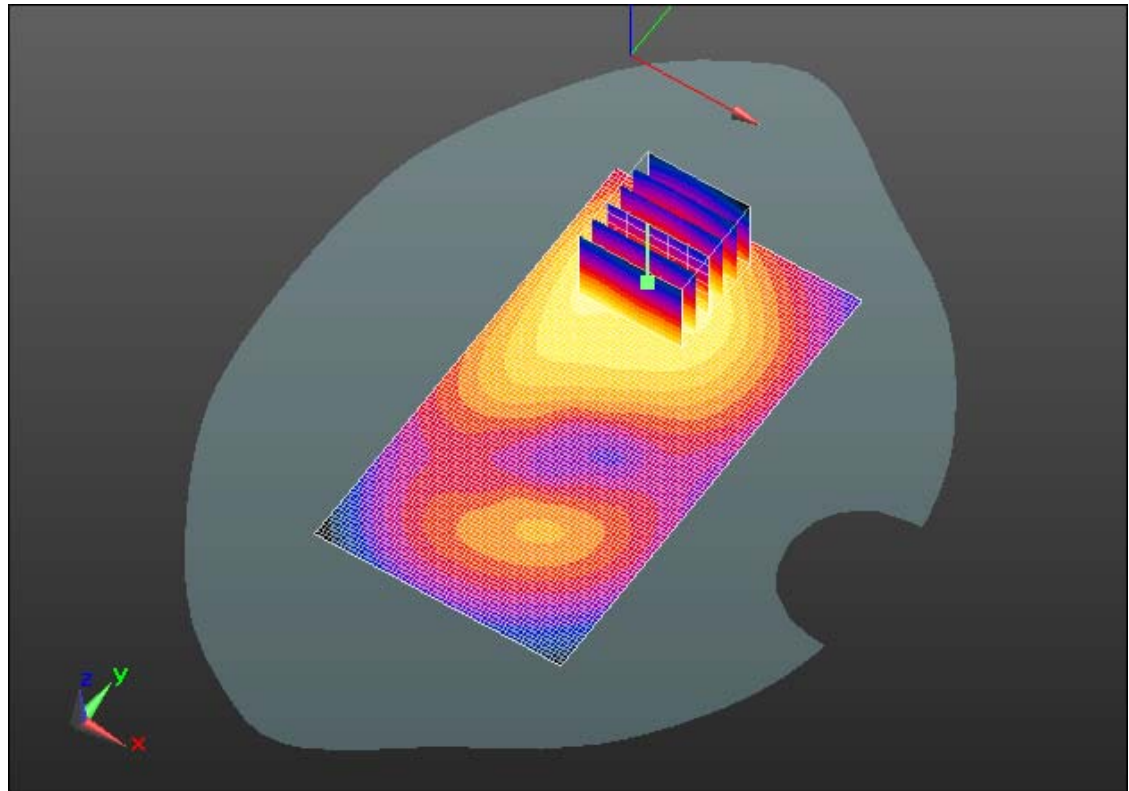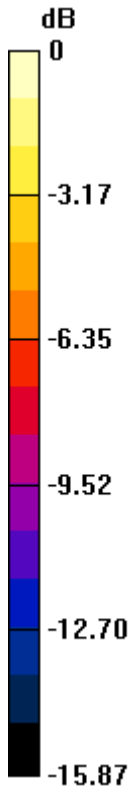

0 dB = 0.430mW/g = -7.33 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 51(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/26/2012 10:53:19 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Front_EDGE1900_mid_chan_amb_temp_23.8_liq_tem p_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: EDGE 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.499$ mho/m; $\epsilon_r = 50.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.265 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.178 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.3640

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.276 mW/g



Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

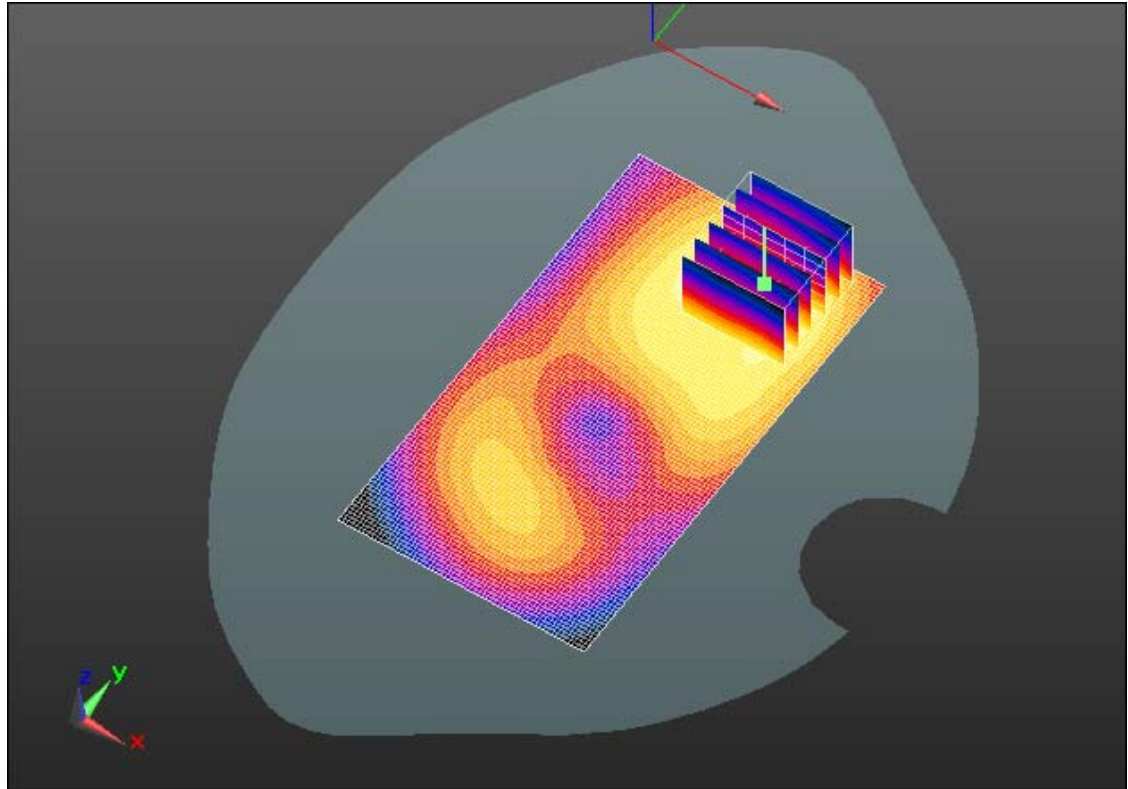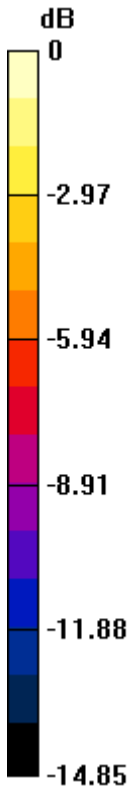

0 dB = 0.280mW/g = -11.06 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 53(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/29/2012 2:34:39 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_GPRS1900_mid_chan_amb_temp_23.9_liq_temp_22.5C_2100

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: GPRS 1900; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.546$ mho/m; $\epsilon_r = 51.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.766 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 8.738 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.9880


SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.720 mW/g


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 54(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

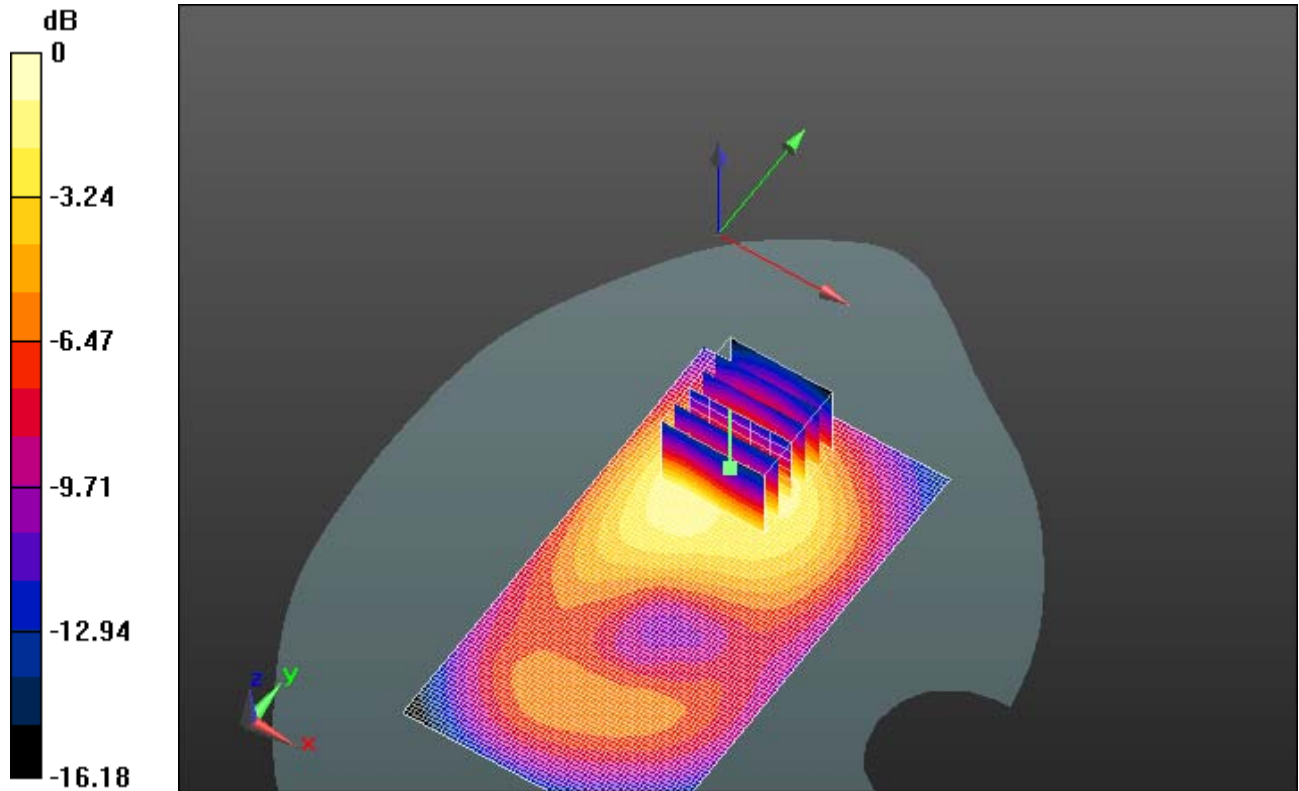

0 dB = 0.720mW/g = -2.85 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 55(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

UMTS Band II

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 56(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/23/2012 4:14:05 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_UMTS_Band_II_mid_chan_amb_temp_24.1_liq_temp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.548$ mho/m; $\epsilon_r = 50.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.766 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.934 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.9940

SAR(1 g) = 0.635 mW/g; SAR(10 g) = 0.379 mW/g

Maximum value of SAR (measured) = 0.731 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

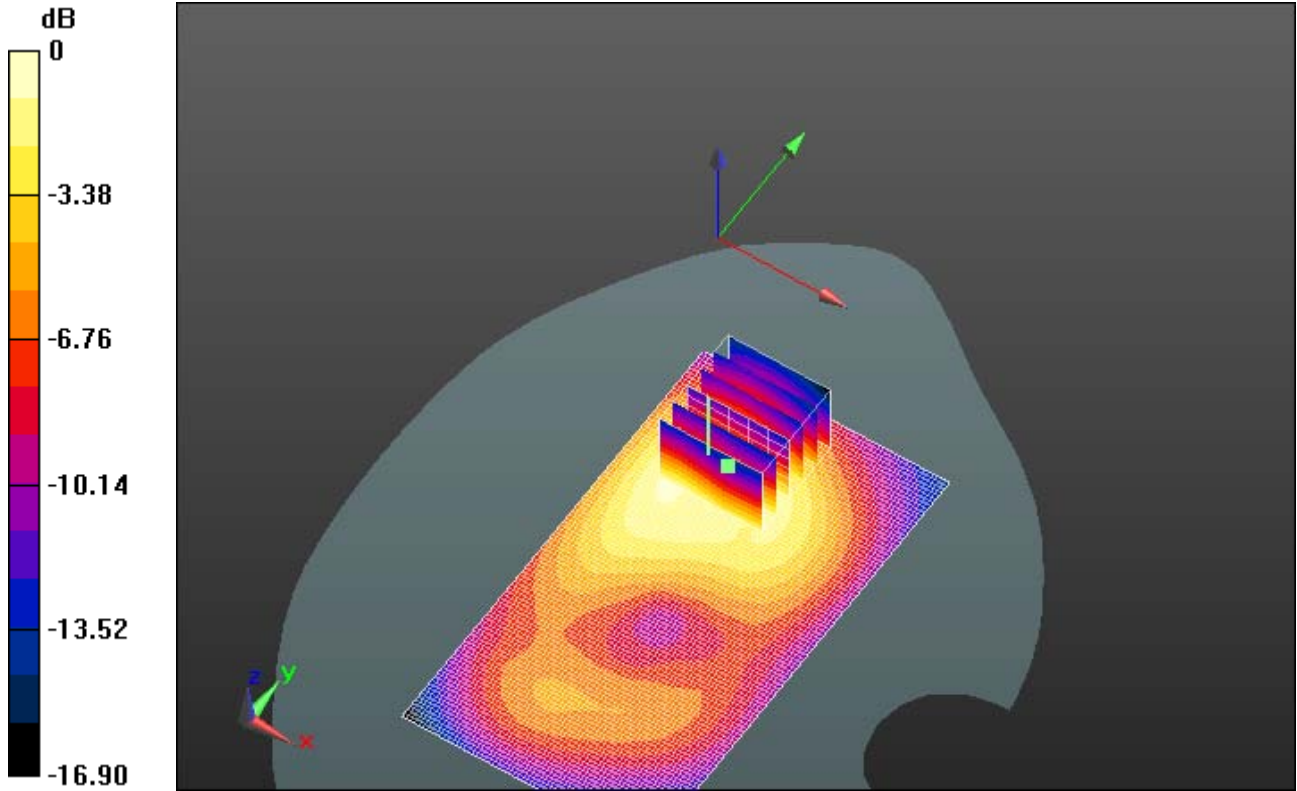

0 dB = 0.730mW/g = -2.73 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 58(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/23/2012 4:49:36 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_UMTS_Band_II_mid_chan_amb_temp_23.9_liq_t emp_22.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.548$ mho/m; $\epsilon_r = 50.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.513 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.690 V/m; Power Drift = 0.25 dB

Peak SAR (extrapolated) = 0.6840

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.521 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

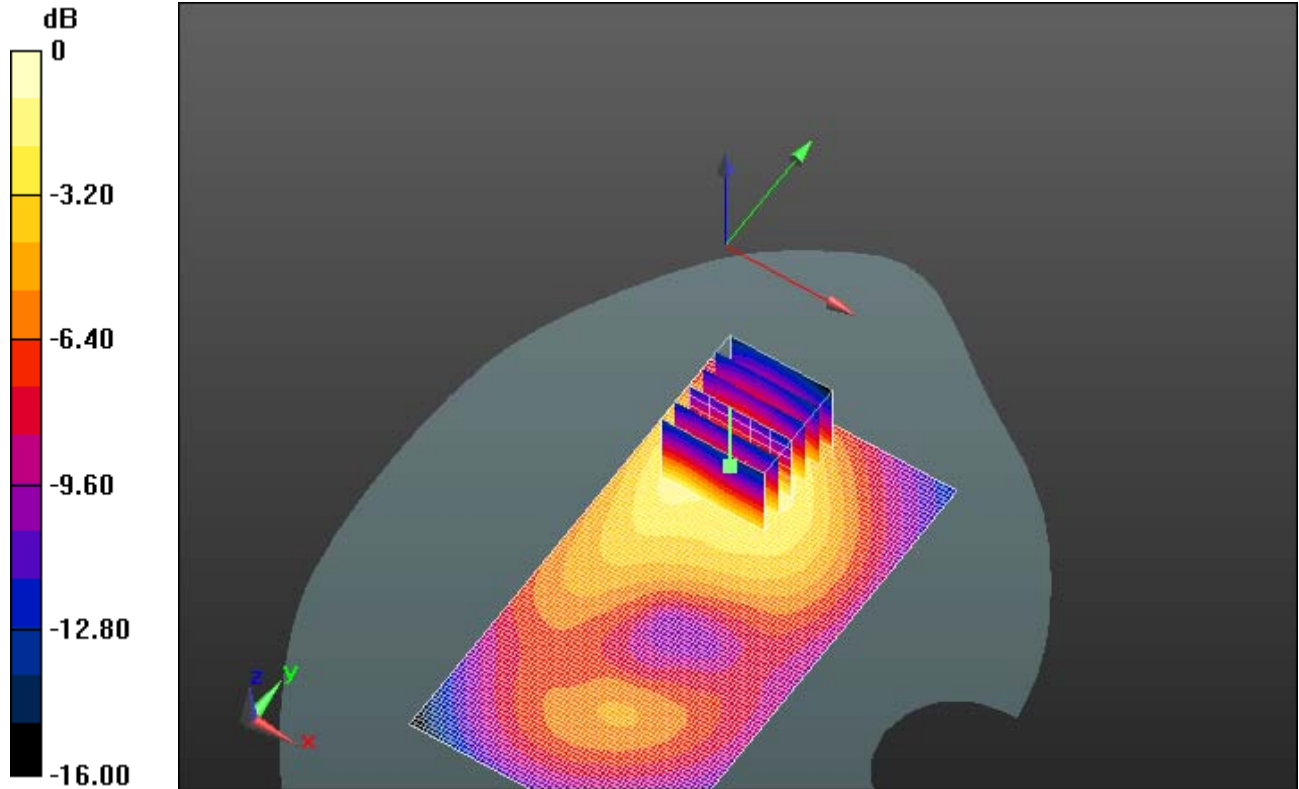

0 dB = 0.520mW/g = -5.68 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 60(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/26/2012 10:43:19 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Front_UMTS_Band_II_mid_chan_amb_temp_25.3_liq_t emp_22.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.499$ mho/m; $\epsilon_r = 50.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.317 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.003 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.4290

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.332 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

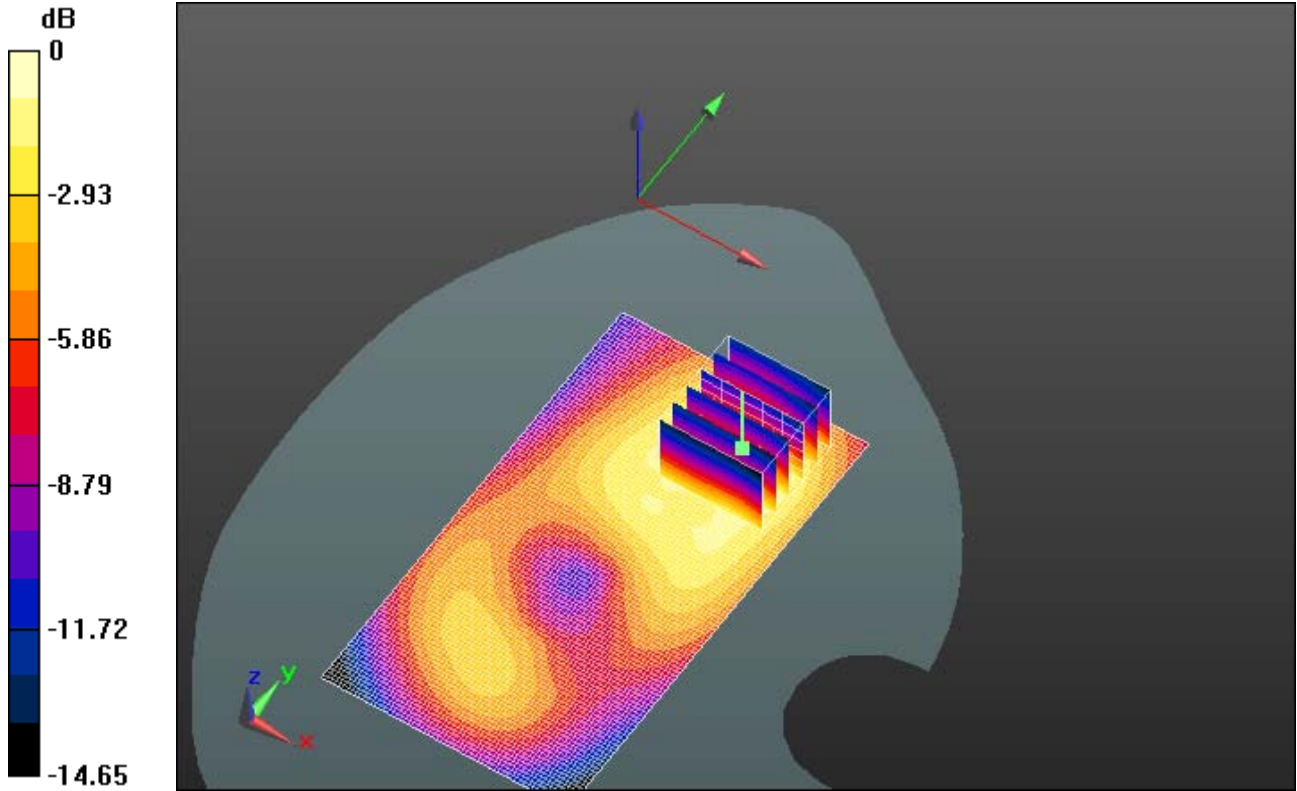

0 dB = 0.330mW/g = -9.63 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 62(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 11/29/2012 2:55:19 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_UMTS_Band_II_mid_chan_amb_temp_23.9_liq_temp_22.7C_2100

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: WCDMA FDD II; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.546$ mho/m; $\epsilon_r = 51.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.92, 4.92, 4.92); Calibrated: 1/11/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn473; Calibrated: 1/13/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Touch position -/Area Scan (61x111x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.809 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.937 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.0320

SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.386 mW/g

Maximum value of SAR (measured) = 0.759 mW/g


Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW


IC 2503A-RFL110LW 2503A-RFP120LW
--

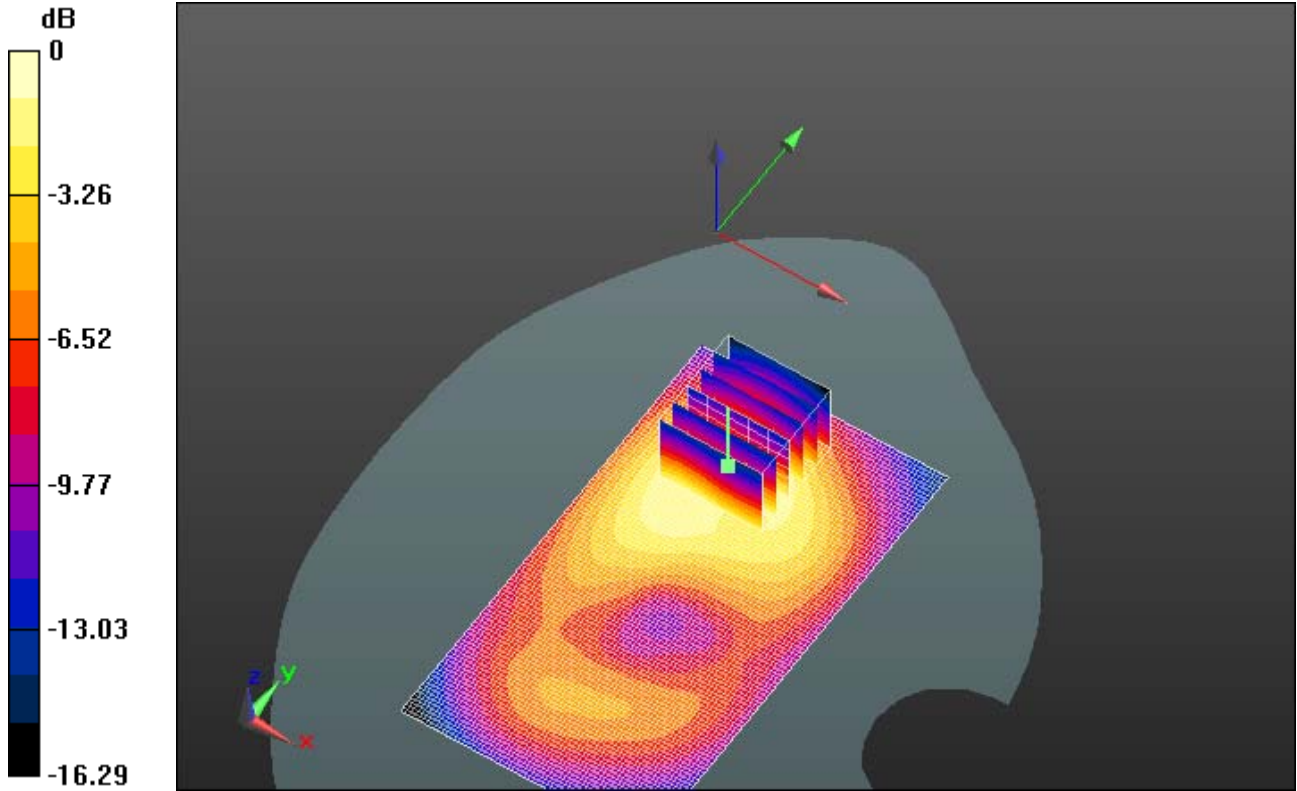

0 dB = 0.760mW/g = -2.38 dB mW/g

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 64(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

802.11b

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 65(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 1/7/2013 11:53:48 AM

Test Laboratory: RIM Testing Services

Body-worn_SAR_802.11b_15mm_back

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: 802.11 b (2450); Communication System Band: 802.11 b;
Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 52.838$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.11, 4.11, 4.11); Calibrated: 11/13/2012;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.4(1052); SEMCAD X 14.6.8(7028)

Flat-Section MSL_Body-Worn SAR/Device

Back_15mm_Amb_Temp_24.0C_Liquid_Temp_22.3C/Area Scan

(71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.320 W/kg

Flat-Section MSL_Body-Worn SAR/Device


Back_15mm_Amb_Temp_24.0C_Liquid_Temp_22.3C/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.024 V/m; Power Drift = 0.23 dB

Peak SAR (extrapolated) = 0.668 W/kg


SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.163 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 66(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Info: Interpolated medium parameters used for SAR evaluation.
 Maximum value of SAR (measured) = 0.327 W/kg

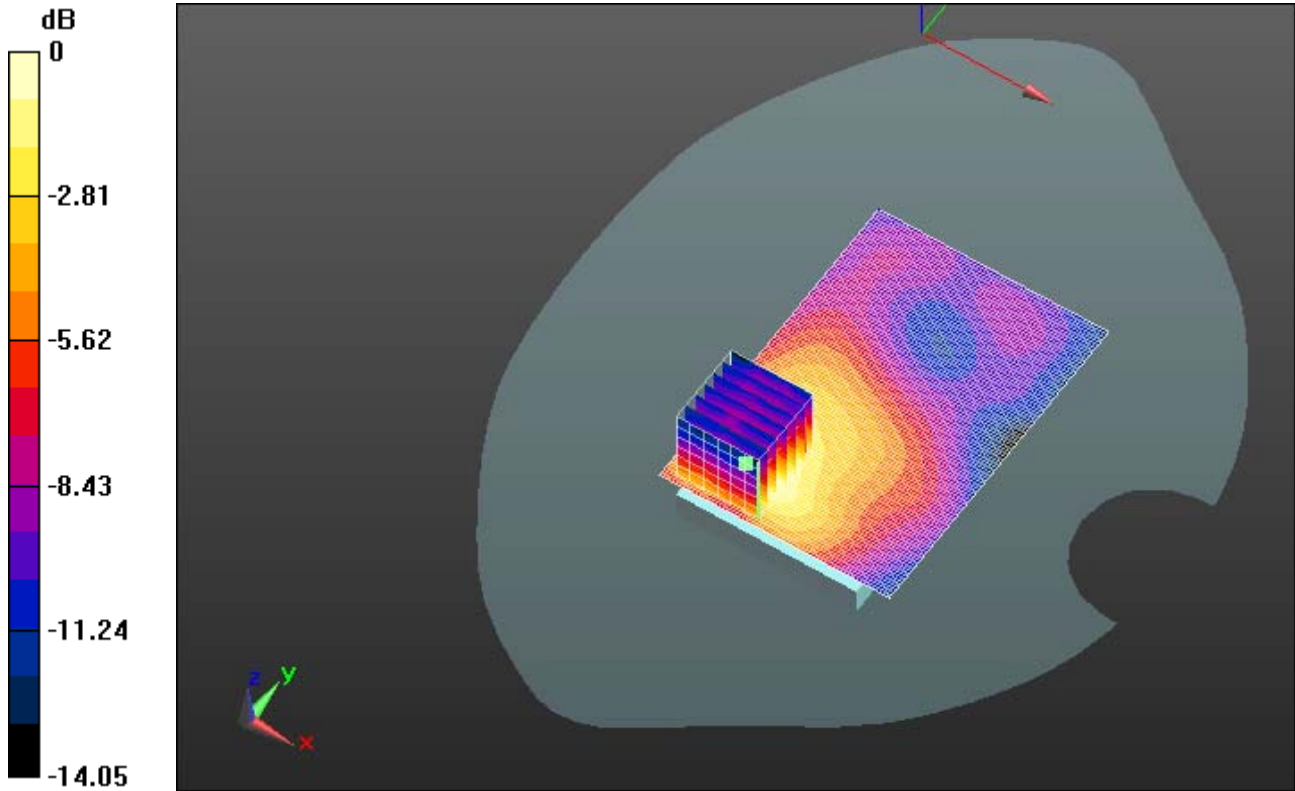

0 dB = 0.320 W/kg = -4.95 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 67(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 1/7/2013 12:22:08 PM

Test Laboratory: RIM Testing Services

Body-worn_SAR_802.11b_Holster_back

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: 802.11 b (2450); Communication System Band: 802.11 b;
Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 52.838$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.11, 4.11, 4.11); Calibrated: 11/13/2012;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7, 32.7$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.4(1052); SEMCAD X 14.6.8(7028)

Flat-Section MSL_Body-Worn SAR/Holster_Device

Back_Amb_Temp_24.2C_Liquid_Temp_22.3C/Area Scan (71x101x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.267 W/kg

Flat-Section MSL_Body-Worn SAR/Holster_Device


Back_Amb_Temp_24.2C_Liquid_Temp_22.3C/Zoom Scan (7x7x7)/Cube

0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 5.523 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.543 W/kg


SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.142 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 68(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Info: Interpolated medium parameters used for SAR evaluation.
 Maximum value of SAR (measured) = 0.261 W/kg

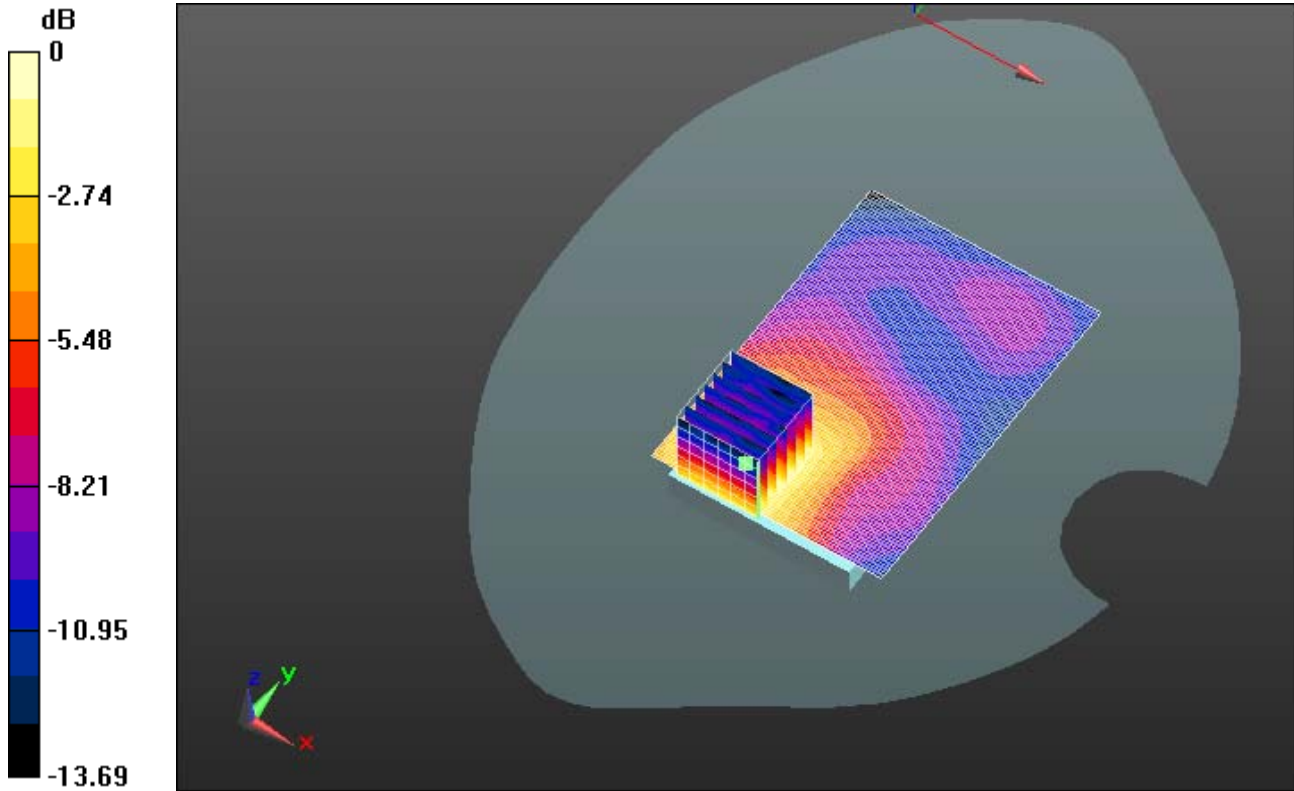

0 dB = 0.267 W/kg = -5.74 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 69(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 1/7/2013 12:45:41 PM

Test Laboratory: RIM Testing Services

Body-worn_SAR_802.11b_Holster_Front

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 25CF0AD9

Communication System: 802.11 b (2450); Communication System Band: 802.11 b;
Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 52.838$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.11, 4.11, 4.11); Calibrated: 11/13/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.7$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.4(1052); SEMCAD X 14.6.8(7028)

Flat-Section MSL_Body-Worn SAR/Holster_Device

Front_Amb_Temp_23.7C_Liquid_Temp_22.4C/Area Scan (71x101x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 3.190 V/m; Power Drift = 0.06 dB

Fast SAR: SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.030 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0606 W/kg



Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW


IC 2503A-RFL110LW 2503A-RFP120LW
--

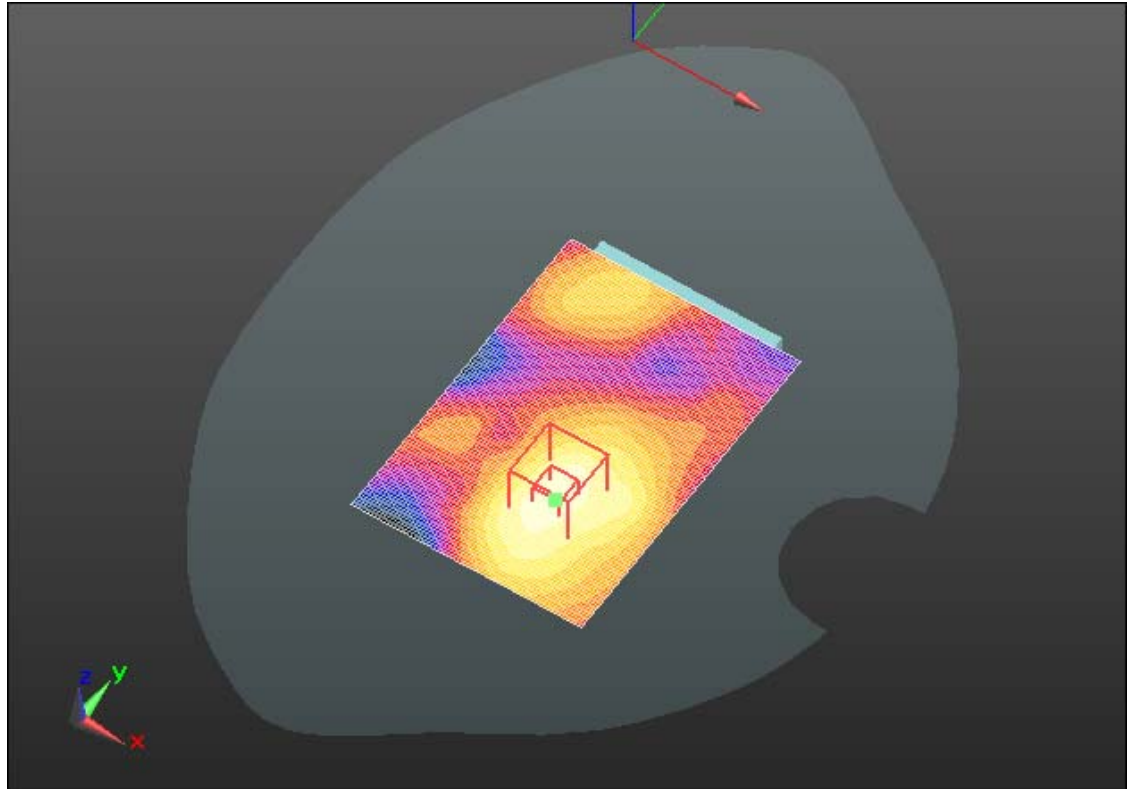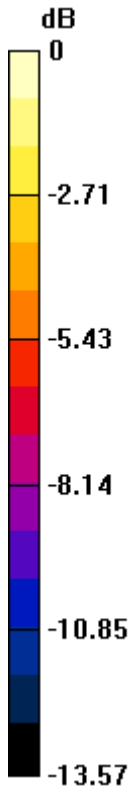

0 dB = 0.0606 W/kg = -12.17 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 71(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Bluetooth

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 72(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 1/22/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 25CF0AD9

Configuration: Flat-Section MSL_Body-Worn SAR

Communication System: Bluetooth; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: f=2441 MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 51.135$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.11,4.11,4.11); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Flat-Section MSL_Body-Worn SAR/Device

Back_15mm_Amb_Temp_23.9C_Liquid_Temp_21.6C/Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 0.510 V/m; **Power Drift = -0.227 dB**


Flat-Section MSL_Body-Worn SAR/Device


Back_15mm_Amb_Temp_23.9C_Liquid_Temp_21.6C/Zoom Scan (56x41x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 0.510 V/m; **Power Drift = -0.227 dB**


Averaged SAR: SAR(1g) = 0.000154 W/kg; SAR(10g) = 0.0000527 W/kg

Maximum value of SAR (interpolated) = 0.0106 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 73(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

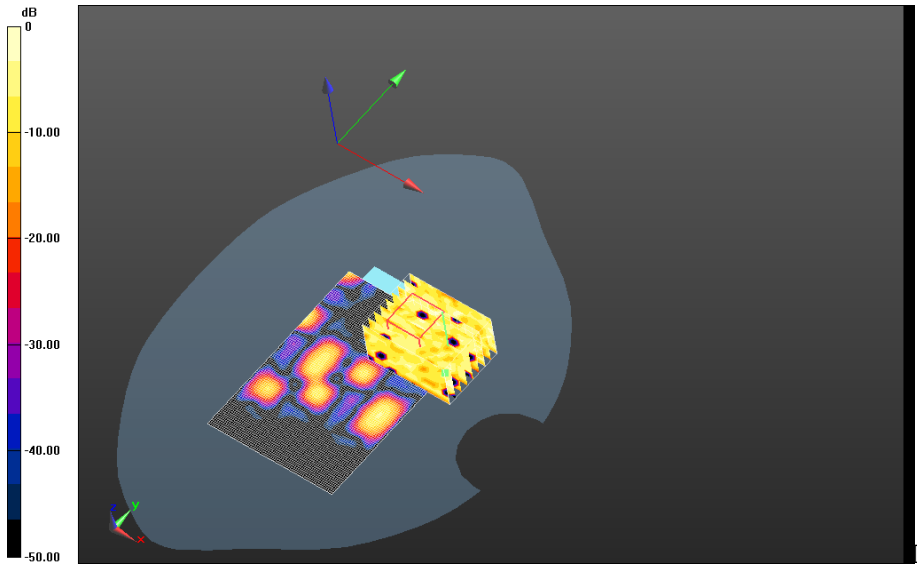

0 dB = 0.0106 W/kg = -19.75 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report		Page 74(116)	
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

802.11a

Date: 2/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 2668C71D

Configuration: Body Worn MSL - 802.11a 5200 MHz Rev 3-03

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;

Frequency: 5180 MHz

Medium Parameters used: $f=5180$ MHz; $\sigma = 5.119$ S/m; $\epsilon_r = 46.984$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.02,4.02,4.02); Calibrated: 11/14/2012;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body Worn MSL - 802.11a 5200 MHz/Device Back_15mm_

chan36_Amb_Temp_23.9C_Liquid_Temp_21.5C/Area Scan (91x151x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.422 W/kg

Body Worn MSL - 802.11a 5200 MHz/Device Back_15mm_


chan36_Amb_Temp_23.9C_Liquid_Temp_21.5C/Zoom Scan (41x41x61)/Cube 0: Interpolated


grid: $dx=0.800$ mm, $dy=0.800$ mm, $dz=0.400$ mm

Reference Value = 1.726 V/m; **Power Drift = 0.433 dB**


Averaged SAR: SAR(1g) = 0.235 W/kg; SAR(10g) = 0.0864 W/kg

Maximum value of SAR (interpolated) = 0.823 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 75(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

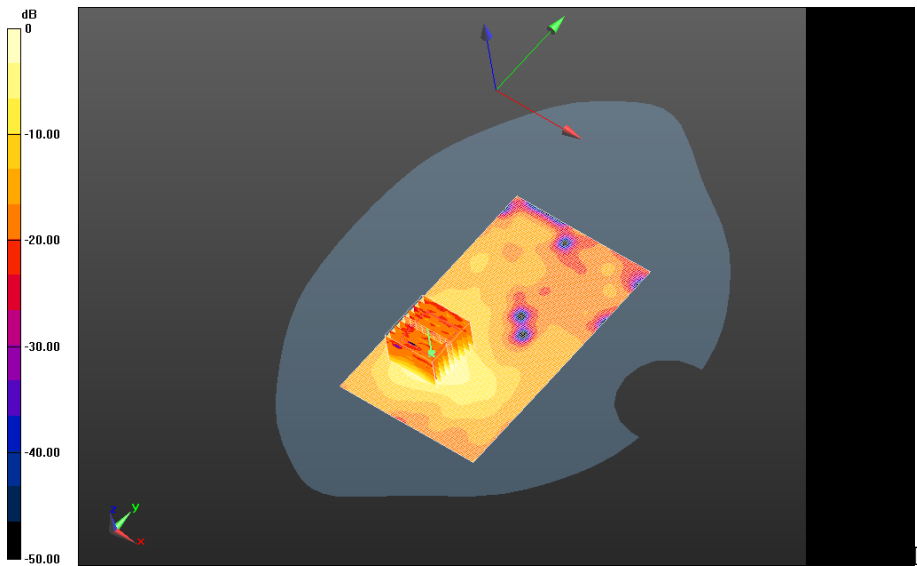

0 dB = 0.420 W/kg = -3.77 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 76(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Body Worn MSL - 802.11a 5200 MHz/Device

Back_15mm_chan64_Amb_Temp_23.9C_Liquid_Temp_21.5C/Area Scan (91x61x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.345 W/kg

Body Worn MSL - 802.11a 5200 MHz/Device


Back_15mm_chan64_Amb_Temp_23.9C_Liquid_Temp_21.5C/Zoom Scan (31x31x61)/Cube 0:

Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm


Reference Value = 1.854 V/m; **Power Drift = 0.606 dB**

Averaged SAR: SAR(1g) = 0.188 W/kg; SAR(10g) = 0.0689 W/kg

Maximum value of SAR (interpolated) = 0.631 W/kg

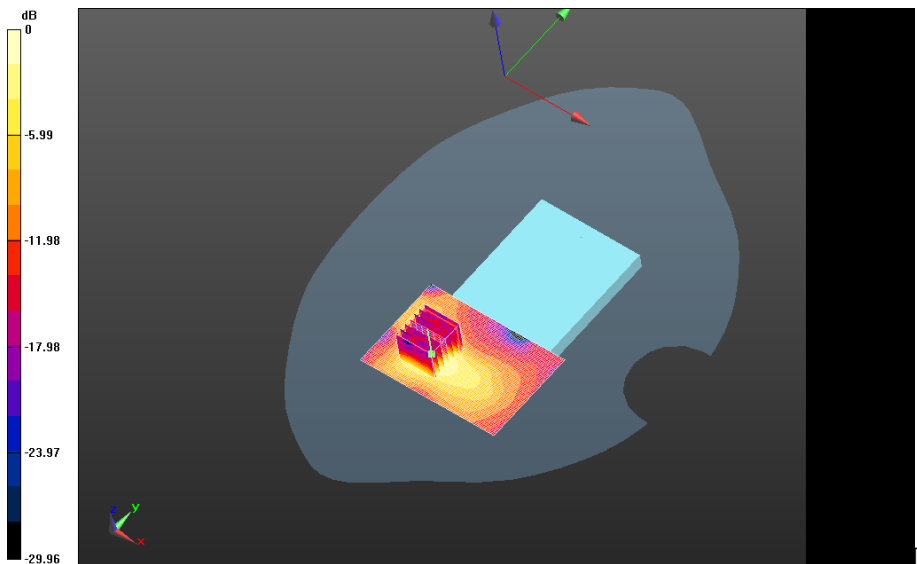


0 dB = 0.420 W/kg = -3.77 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 77(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW


Body Worn MSL - 802.11a 5200 MHz/Holster_Device_Back_chan36_Amb_Temp_23.5C_Liquid_Temp_21.4C/Area Scan (91x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.146 W/kg

Body Worn MSL - 802.11a 5200 MHz/Holster_Device_Back_chan36_Amb_Temp_23.5C_Liquid_Temp_21.4C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 3.818 V/m; **Power Drift = 0.169 dB**

Averaged SAR: SAR(1g) = 0.0621 W/kg; SAR(10g) = 0.0159 W/kg
 Maximum value of SAR (interpolated) = 0.245 W/kg

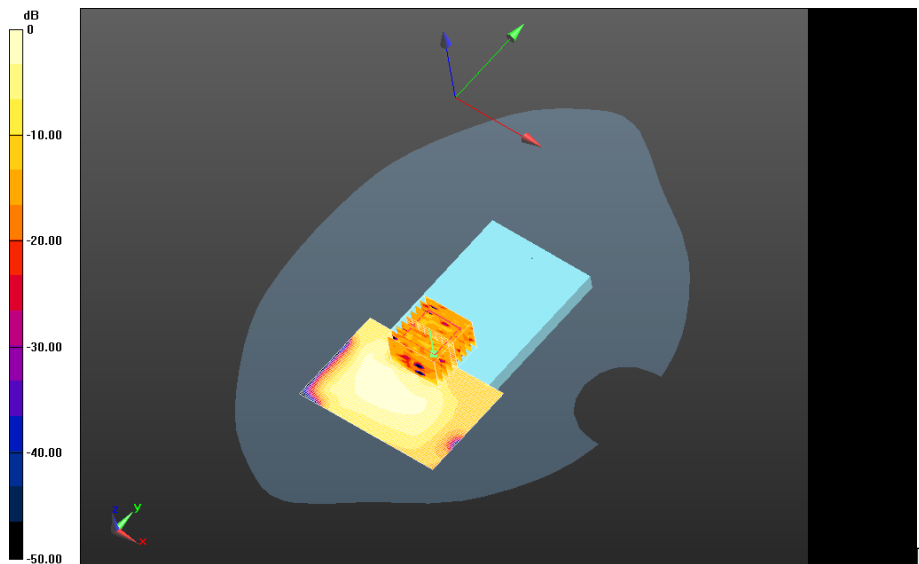


0 dB = 0.328 W/kg = -4.84 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 78(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW


Body Worn MSL - 802.11a 5200 MHz/Holster_Device_Front_
chan36_Amb_Temp_23.3C_Liquid_Temp_21.2C/Area Scan (91x101x1): Interpolated grid:
 dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0213 W/kg

Body Worn MSL - 802.11a 5200 MHz/Holster_Device_Front_
chan36_Amb_Temp_23.3C_Liquid_Temp_21.2C/Zoom Scan (56x46x61)/Cube 0: Interpolated
 grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.043 V/m; **Power Drift = 0.619 dB**

Averaged SAR: SAR(1g) = 0.00631 W/kg; SAR(10g) = 0.00432 W/kg
 Maximum value of SAR (interpolated) = 0.0511 W/kg

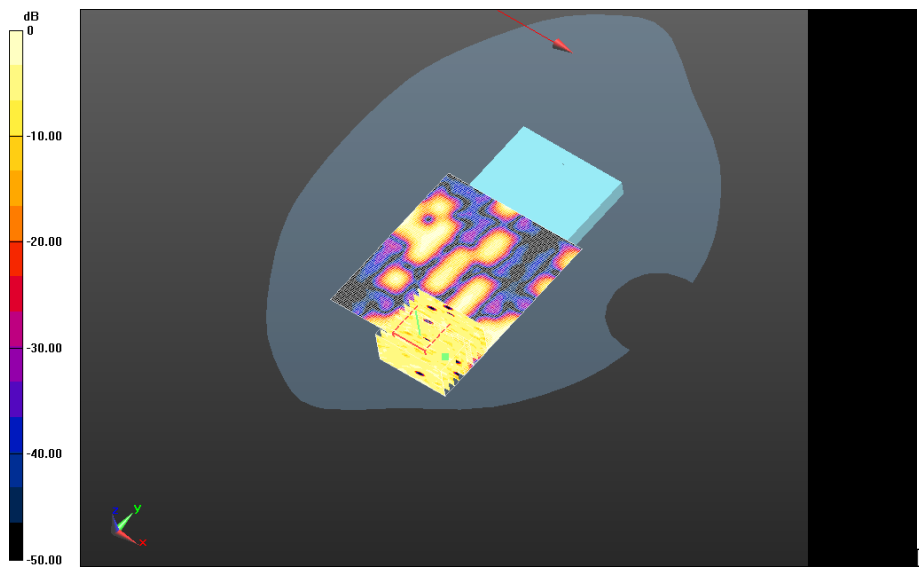


0 dB = 0.137 W/kg = -8.63 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 79(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW


Body Worn MSL - 802.11a 5200 MHz/Device Back_15mm+HS_
chan36_Amb_Temp_23.5C_Liquid_Temp_21.4C/Area Scan (91x61x1): Interpolated grid:
dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.370 W/kg

Body Worn MSL - 802.11a 5200 MHz/Device Back_15mm+HS_
chan36_Amb_Temp_23.5C_Liquid_Temp_21.4C/Zoom Scan (41x41x61)/Cube 0: Interpolated
grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 5.869 V/m; **Power Drift = 0.275 dB**

Averaged SAR: SAR(1g) = 0.185 W/kg; SAR(10g) = 0.0680 W/kg
Maximum value of SAR (interpolated) = 0.674 W/kg

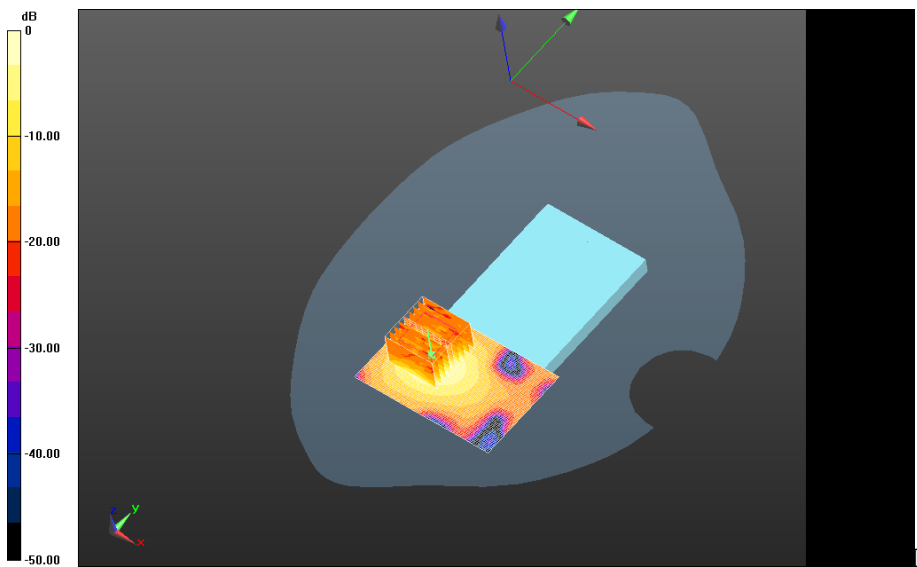


0 dB = 0.346 W/kg = -4.61 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 80(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW


Body Worn MSL - 802.11a 5200 MHz/Device Back+2100mA_15mm_chan36_Amb_Temp_23.9C_Liquid_Temp_21.5C/Area Scan (91x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.454 W/kg

Body Worn MSL - 802.11a 5200 MHz/Device Back+2100mA_15mm_chan36_Amb_Temp_23.9C_Liquid_Temp_21.5C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 6.587 V/m; **Power Drift = 0.068 dB**

Averaged SAR: SAR(1g) = 0.237 W/kg; SAR(10g) = 0.0867 W/kg
 Maximum value of SAR (interpolated) = 0.805 W/kg

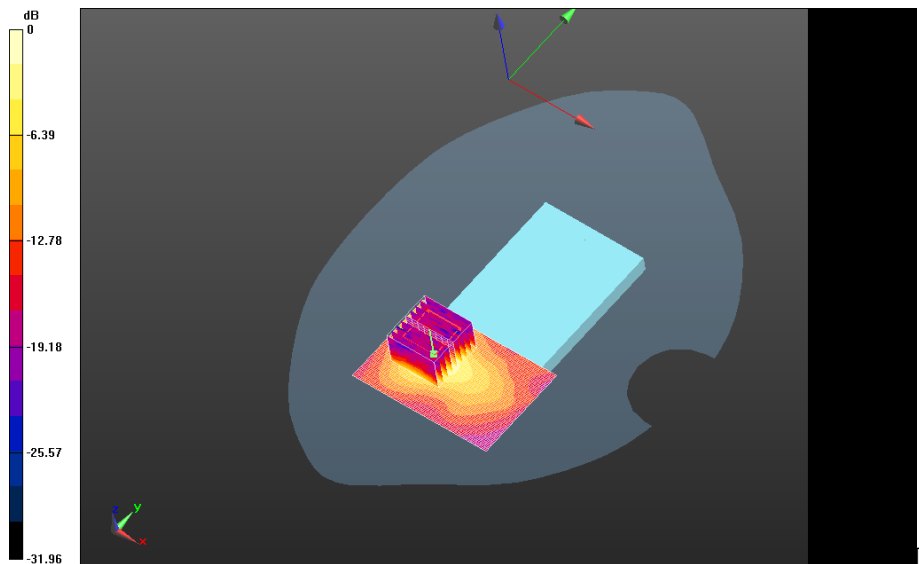

0 dB = 0.0135 W/kg = -18.70 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 81(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 2668C71D

Configuration: Body Worn MSL - 802.11a 5500 MHz Rev 3-03

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;

Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 5.671$ S/m; $\epsilon_r = 47.884$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.66,3.66,3.66); Calibrated: 11/14/2012;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body Worn MSL - 802.11a 5500 MHz/Device

Back_15mm_chan104_Amb_Temp_23.3C_Liquid_Temp_21.5C/Area Scan (91x61x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.150 W/kg

Body Worn MSL - 802.11a 5500 MHz/Device


Back_15mm_chan104_Amb_Temp_23.3C_Liquid_Temp_21.5C/Zoom Scan (41x41x61)/Cube 0:


Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 1.528 V/m; **Power Drift = 0.00334 dB**


Averaged SAR: SAR(1g) = 0.0809 W/kg; SAR(10g) = 0.0290 W/kg

Maximum value of SAR (interpolated) = 0.587 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 82(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

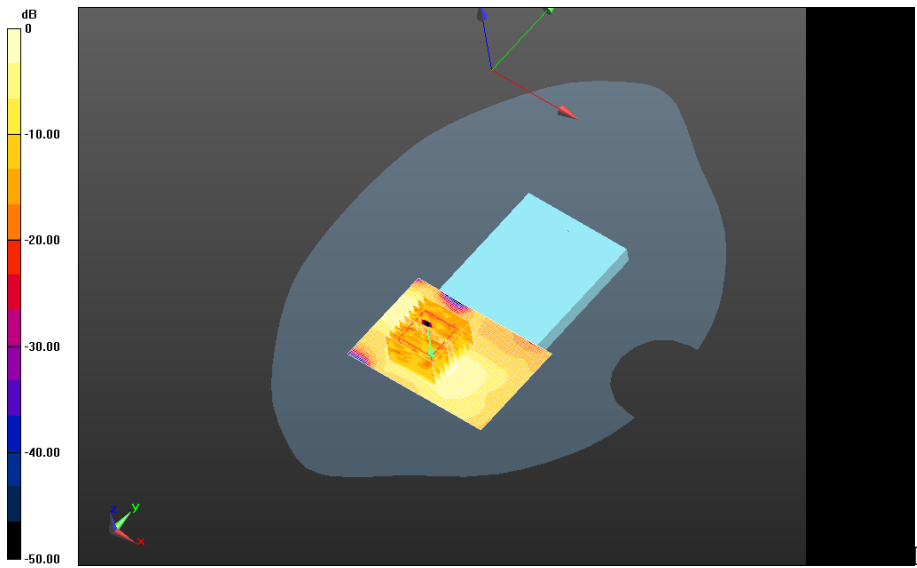

0 dB = 0.151 W/kg = -8.21 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 83(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 2668C71D

Configuration: Body Worn MSL - 802.11a 5800 MHz Rev 3-03

Communication System: 802.11a ; Communication System Band: Upper band II; Frequency: 5745 MHz

Medium Parameters used: $f=5745$ MHz; $\sigma = 5.721$ S/m; $\epsilon_r = 45.830$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.57,3.57,3.57); Calibrated: 11/14/2012;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body Worn MSL - 802.11a 5800 MHz/Device

Back_15mm_chan149_Amb_Temp_23.3C_Liquid_Temp_21.5C/Area Scan (91x61x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.340 W/kg

Body Worn MSL - 802.11a 5800 MHz/Device


Back_15mm_chan149_Amb_Temp_23.3C_Liquid_Temp_21.5C/Zoom Scan (36x36x61)/Cube 0:


Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 1.031 V/m; **Power Drift = 0.490 dB**


Averaged SAR: SAR(1g) = 0.181 W/kg; SAR(10g) = 0.0686 W/kg

Maximum value of SAR (interpolated) = 0.705 W/kg


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 84(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

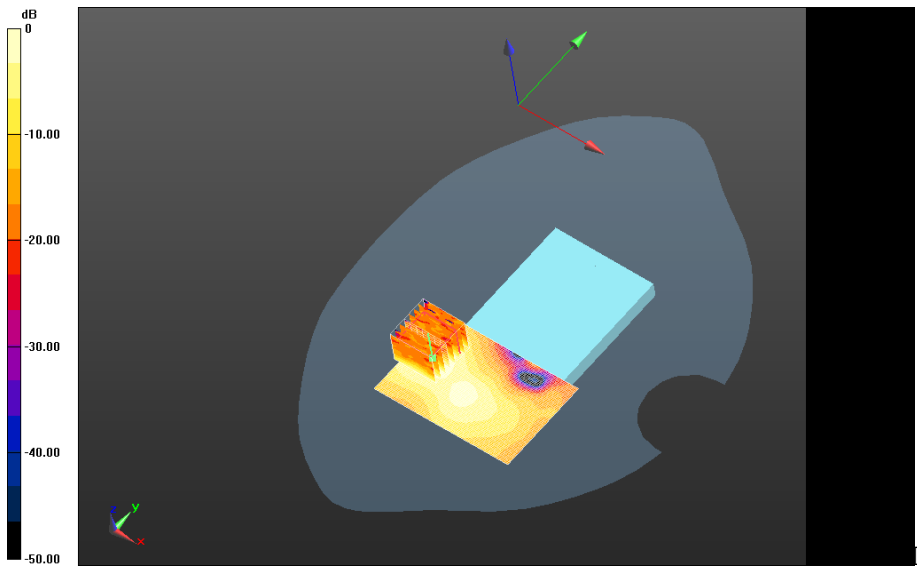

0 dB = 0.338 W/kg = -4.71 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 85(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Z axis plot for the worst case body configuration

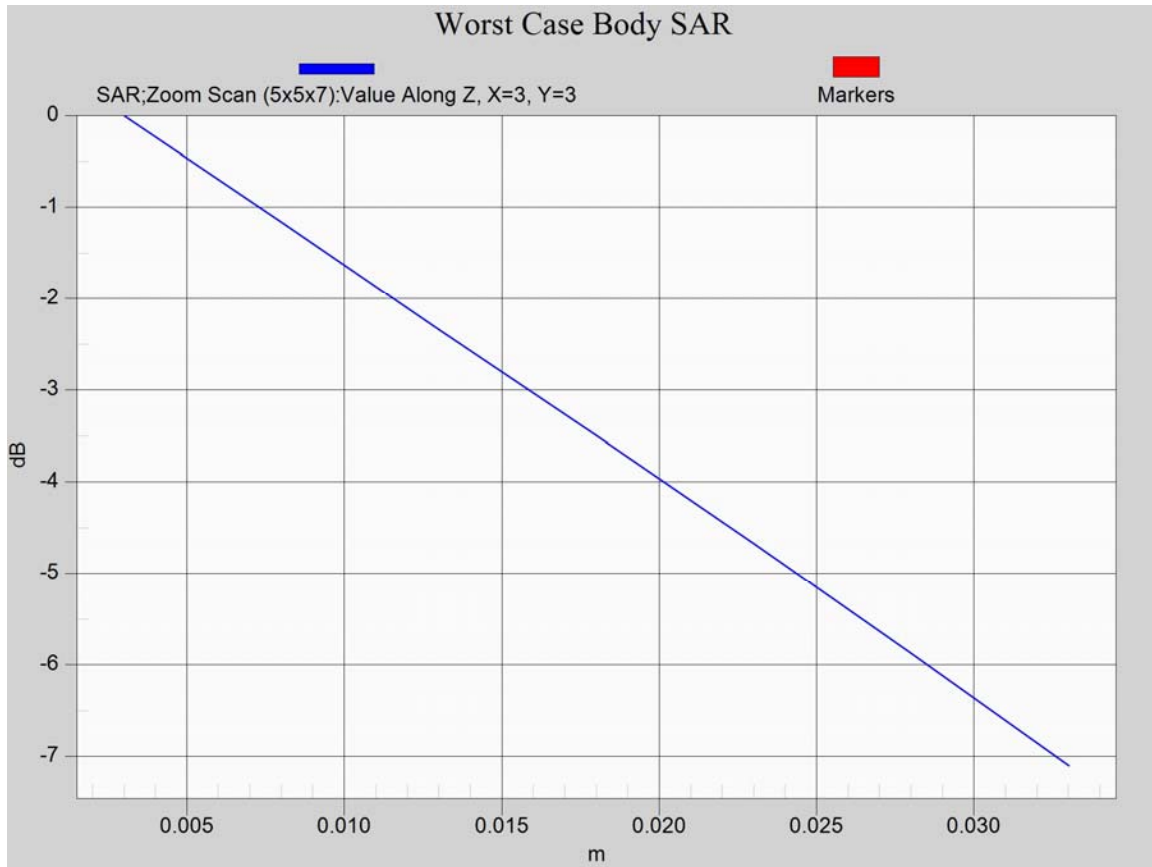



Document
Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report

Page
86(116)

Author Data
Andrew Becker


Dates of Test
Nov 22 2012 – Feb 28 2013

Test Report No
RTS-6026-1303-02


FCC ID:
**L6ARFL110LW
L6ARFP120LW**

IC
**2503A-RFL110LW
2503A-RFP120LW**

RFP121LW

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 87(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

LTE 5

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 88(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/5/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2641D6A8

Configuration: Body_worn_SAR – LTE 5

Communication System: LTE 5; Communication System Band: LTE 5; Frequency: 836.5 MHz

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 53.021$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (6.06,6.06,6.06); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body_worn_SAR/15mm_Spacer_Device_Back_LTE_5_Mid_Chan_QPSK_RB1_Offset0_Amb_Temp_23.5C_Liq_Temp_21.8C/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.628 W/kg


Body_worn_SAR/15mm_Spacer_Device_Back_LTE_5_Mid_Chan_QPSK_RB1_Offset0_Amb_Temp_23.5C_Liq_Temp_21.8C/Zoom Scan (5x5x7) (26x26x36)/Cube 0: Interpolated grid:


dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 23.718 V/m; **Power Drift = 0.098 dB**


Averaged SAR: SAR(1g) = 0.630 W/kg; SAR(10g) = 0.456 W/kg

Maximum value of SAR (interpolated) = 0.915 W/kg


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 89(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

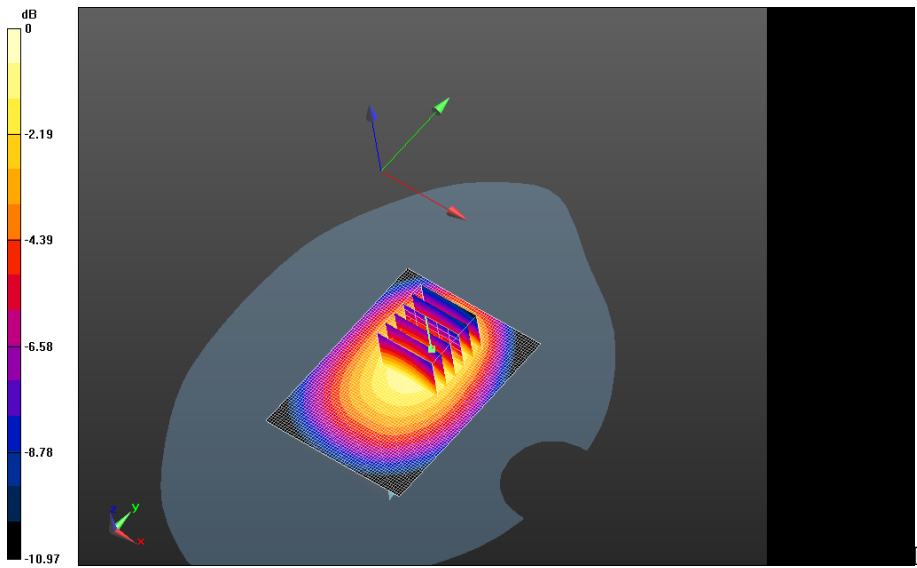

0 dB = 0.709 W/kg = -1.49 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 90(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

EDGE 850

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 91(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/5/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2641D6A8

Configuration: Body_worn_SAR_EDGE850

Communication System: EDGE 850 (2slots); Communication System Band: EDGE 850; Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 53.016$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section


DASY Configuration:


- Probe: ET3DV6 - SN1644; ConvF: (6.06,6.06,6.06); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body_worn_SAR_EDGE850/15mm_Spacer_Device_Back_EDGE850_Amb_Temp_23.5C_Liq_Temp_21.8C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.595 W/kg


Body_worn_SAR_EDGE850/15mm_Spacer_Device_Back_EDGE850_Amb_Temp_23.5C_Liq_Temp_21.8C/Zoom Scan (5x5x7) (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 23.673 V/m; **Power Drift = -0.095 dB**

Averaged SAR: SAR(1g) = 0.556 W/kg; SAR(10g) = 0.403 W/kg
Maximum value of SAR (interpolated) = 0.740 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 92(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

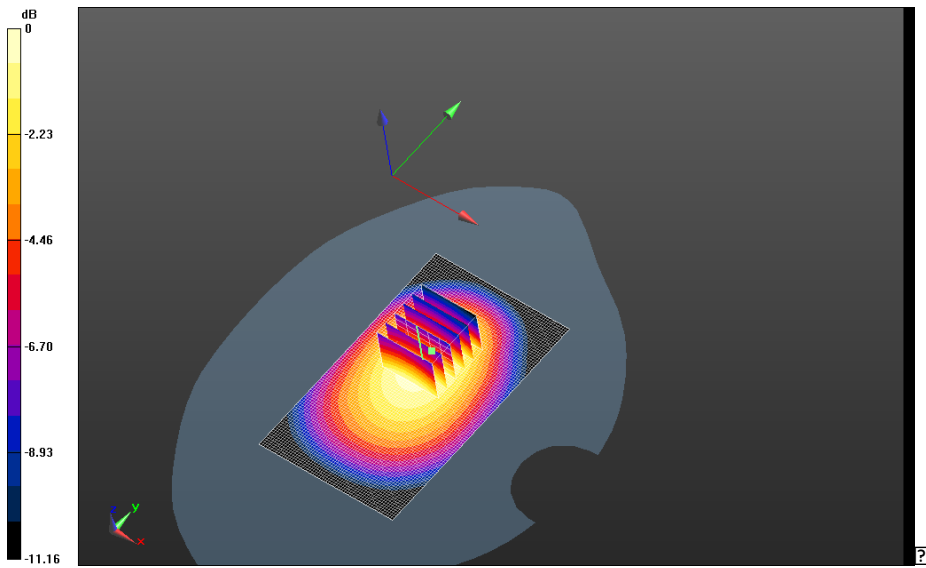


0 dB = 0.589 W/kg = -2.30 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 93(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

UMTS Band

V

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 94(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/6/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2641D6A8

Configuration: Body_worn_SAR_UMTS_Band_V

Communication System: WCDMA FDD V; Communication System Band: UMTS band V;

Frequency: 836.4 MHz

Medium Parameters used: $f=836.4$ MHz; $\sigma = 0.983$ S/m; $\epsilon_r = 53.022$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (6.06,6.06,6.06); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body_worn_SAR_UMTS_Band_V/15mm_Spacer_Device_Back_UMTS_V_Mid_chan_Amb_Temp_23.6C_Liq_Temp_22.6C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm


Maximum value of SAR (interpolated) = 0.733 W/kg


Body_worn_SAR_UMTS_Band_V/15mm_Spacer_Device_Back_UMTS_V_Mid_chan_Amb_Temp_23.6C_Liq_Temp_22.6C/Zoom Scan (5x5x7) (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 26.514 V/m; **Power Drift = -0.035 dB**


Averaged SAR: SAR(1g) = 0.677 W/kg; SAR(10g) = 0.506 W/kg

Maximum value of SAR (interpolated) = 0.851 W/kg


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 95(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

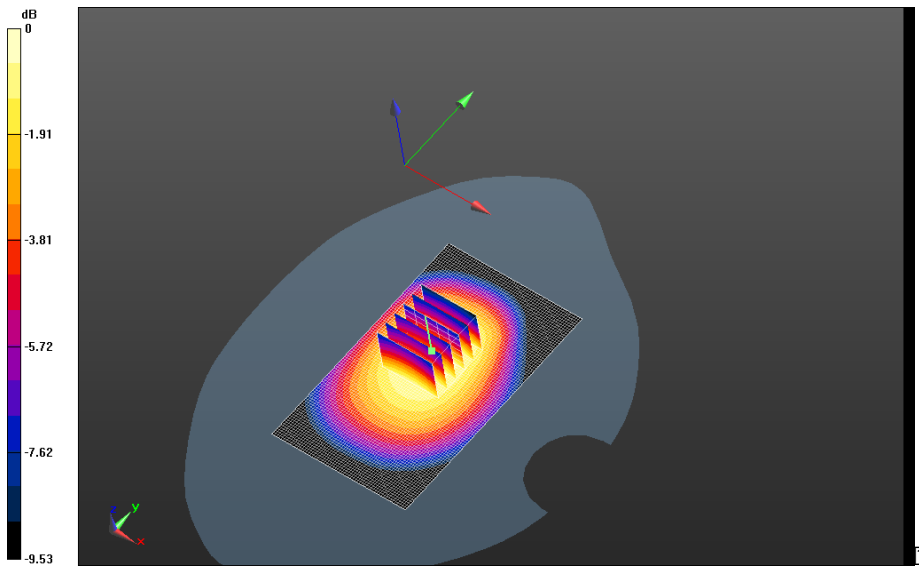

0 dB = 0.716 W/kg = -1.45 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 96(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

LTE 4

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 97(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/1/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 2641D6A8

Configuration: Body Worn MSL - LTE Band 4

Communication System: LTE 4; Communication System Band: LTE 4; Frequency: 1745 MHz

Medium Parameters used: $f=1745$ MHz; $\sigma = 1.530$ S/m; $\epsilon_r = 51.403$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.75,4.75,4.75); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body Worn MSL - LTE Band 4/15mm Device Back -

LTE_4_High_chan_QPSK_RB_1_Offset_99_amb_temp_23.4_liq_temp_21.2C/Area Scan

(61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.777 W/kg

Body Worn MSL - LTE Band 4/15mm Device Back -


LTE_4_High_chan_QPSK_RB_1_Offset_99_amb_temp_23.4_liq_temp_21.2C/Zoom Scan


(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 11.281 V/m; **Power Drift = -0.127 dB**

Averaged SAR: SAR(1g) = 0.710 W/kg; SAR(10g) = 0.438 W/kg

Maximum value of SAR (interpolated) = 1.03 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 98(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

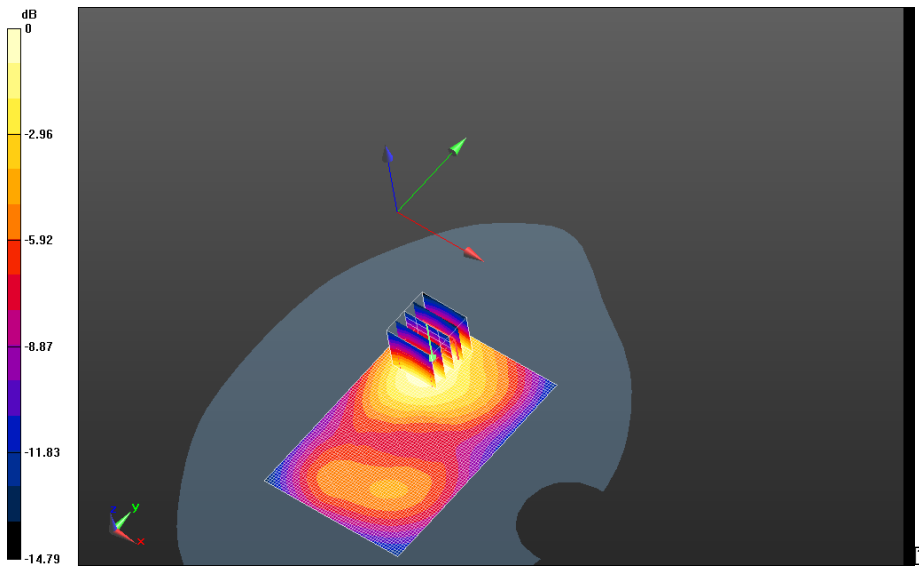

0 dB = 0.779 W/kg = -1.08 dBW/kg



Document
Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report

Page
99(116)

Author Data
Andrew Becker


Dates of Test
Nov 22 2012 – Feb 28 2013

Test Report No
RTS-6026-1303-02

FCC ID:
L6ARFL110LW
L6ARFP120LW

IC
2503A-RFL110LW
2503A-RFP120LW

UMTS Band IV

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 100(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/1/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 2641D6A8

Configuration: Body Worn MSL - UMTS Band IV

Communication System: WCDMA FDD IV; Communication System Band: UMTS band IV;

Frequency: 1732.6 MHz

Medium Parameters used: $f=1732.6$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 51.514$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.75,4.75,4.75); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body Worn MSL - UMTS Band IV/15mm Device Back -

UMTS_IV_Mid_chan_amb_temp_23.2C_liq_temp_22.4C/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.604 W/kg

Body Worn MSL - UMTS Band IV/15mm Device Back -


UMTS_IV_Mid_chan_amb_temp_23.2C_liq_temp_22.4C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.154 V/m; **Power Drift = 0.027 dB**


Averaged SAR: SAR(1g) = 0.541 W/kg; SAR(10g) = 0.338 W/kg

Maximum value of SAR (interpolated) = 0.770 W/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 101(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

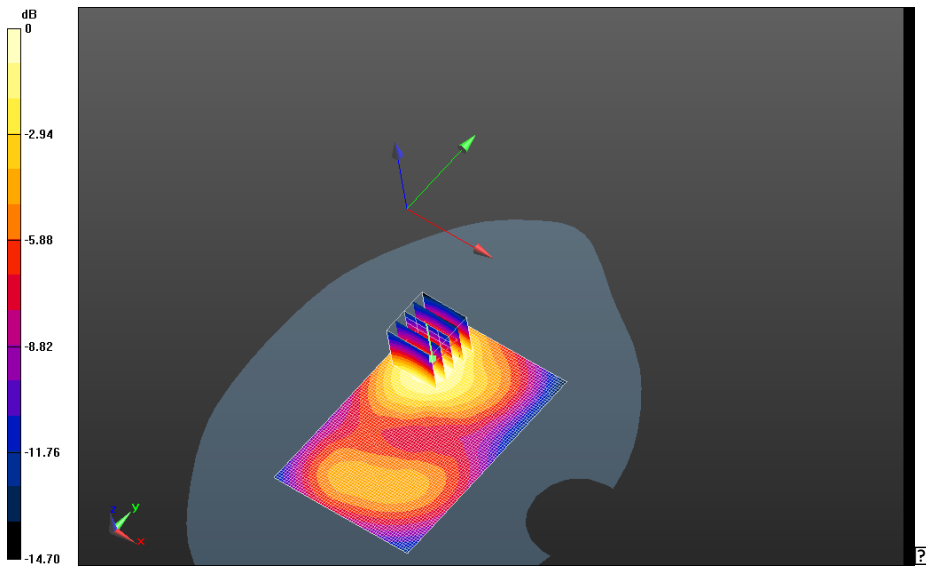


0 dB = 0.592 W/kg = -2.28 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 102(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW


Body Worn MSL - UMTS Band IV/Holster Device Back - UMTS_IV_Mid_chan_amb_temp_23.2C_liq_temp_22.4C/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.393 W/kg

Body Worn MSL - UMTS Band IV/Holster Device Back - UMTS_IV_Mid_chan_amb_temp_23.2C_liq_temp_22.4C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
 Reference Value = 8.714 V/m; **Power Drift = -0.056 dB**

Averaged SAR: SAR(1g) = 0.350 W/kg; SAR(10g) = 0.226 W/kg
 Maximum value of SAR (interpolated) = 0.481 W/kg

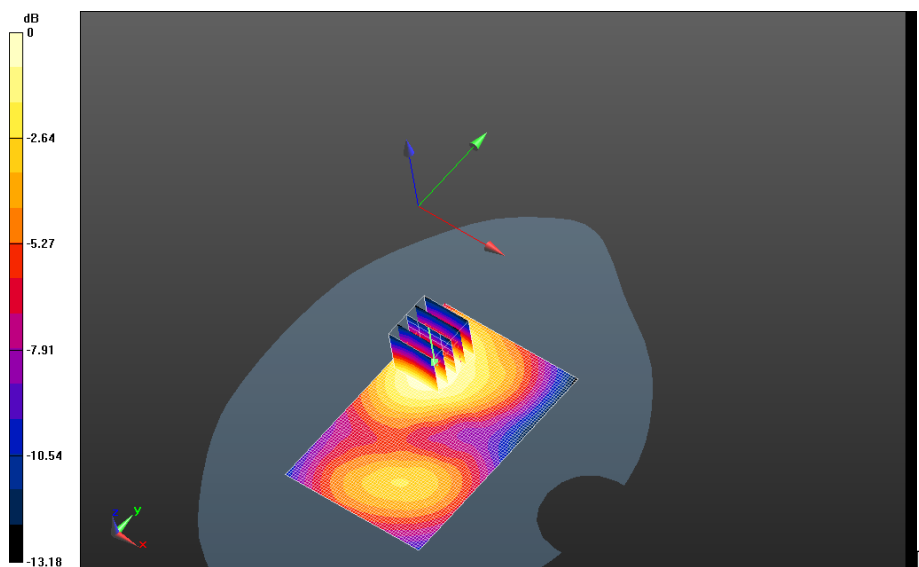


0 dB = 0.592 W/kg = -2.28 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 103(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW


Body Worn MSL - UMTS Band IV/Holster Device Front - UMTS_IV_Mid_chan_amb_temp_23.2C_liq_temp_22.4C/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.289 W/kg

Body Worn MSL - UMTS Band IV/Holster Device Front - UMTS_IV_Mid_chan_amb_temp_23.2C_liq_temp_22.4C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 6.950 V/m; **Power Drift = 0.179 dB**


Averaged SAR: SAR(1g) = 0.268 W/kg; SAR(10g) = 0.172 W/kg
Maximum value of SAR (interpolated) = 0.386 W/kg

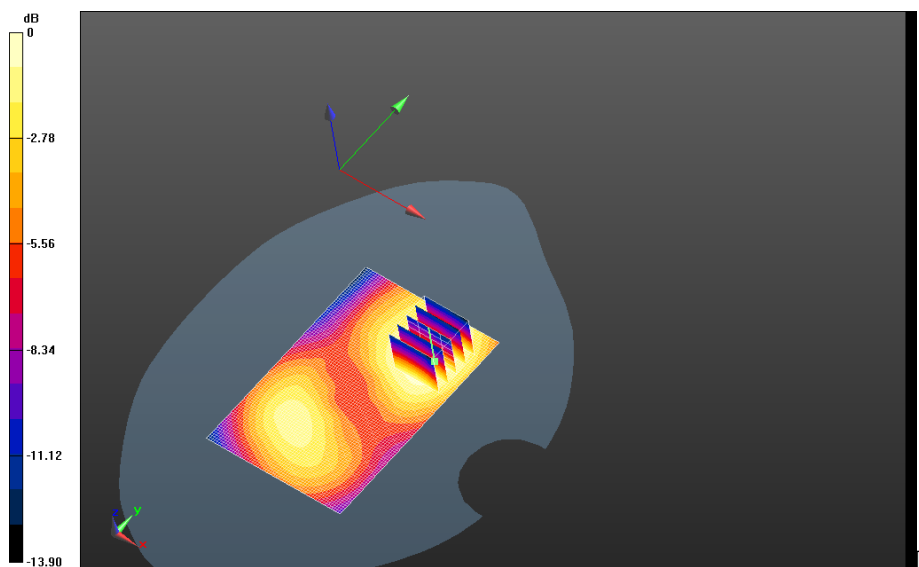

0 dB = 0.381 W/kg = -4.19 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 104(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

LTE 2

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 105(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 26703205

Configuration: Body Worn MSL - LTE Band 2

Communication System: LTE band 2; Communication System Band: LTE band 2; Frequency: 1880 MHz

Medium Parameters used: f=1880 MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 50.751$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.75,4.75,4.75); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Body Worn MSL - LTE Band 2/15mm Device Back -

LTE_2_Mid_chan_QPSK_RB_1_Offset_99_amb_temp_23.4_liq_temp_21.2C/Area Scan

(61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.607 W/kg

Body Worn MSL - LTE Band 2/15mm Device Back -

LTE_2_Mid_chan_QPSK_RB_1_Offset_99_amb_temp_23.4_liq_temp_21.2C/Zoom Scan

(26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 8.282 V/m; **Power Drift = 0.163 dB**

Averaged SAR: SAR(1g) = 0.582 W/kg; SAR(10g) = 0.361 W/kg

Maximum value of SAR (interpolated) = 0.852 W/kg


Author Data
Andrew Becker

Dates of Test
Nov 22 2012 – Feb 28 2013


Test Report No
RTS-6026-1303-02

FCC ID:
L6ARFL110LW
L6ARFP120LW


IC
2503A-RFL110LW
2503A-RFP120LW

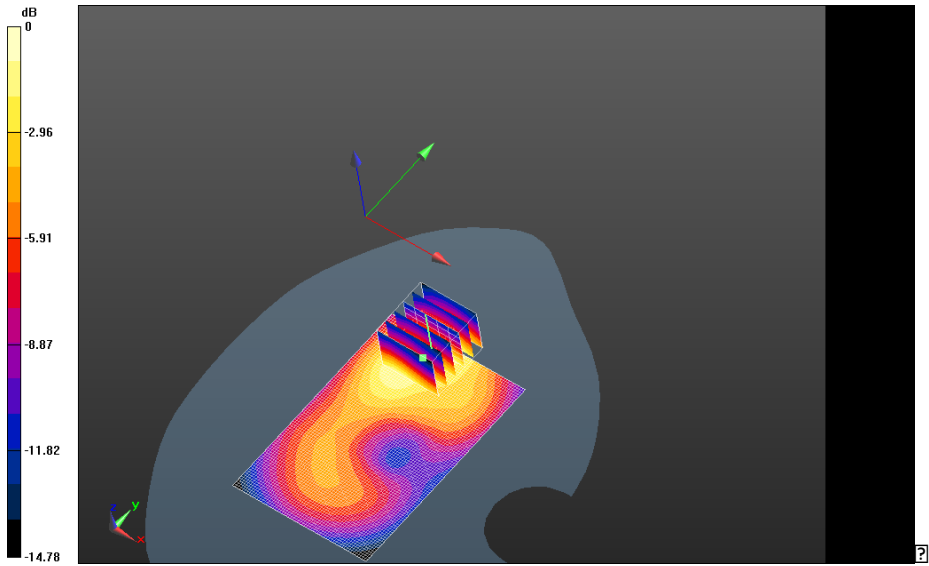

0 dB = 0.633 W/kg = -1.99 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 107(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

802.11b

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 108(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 2/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone_Top_Bottom, Type: Sample , Serial: 26703205

Configuration: Flat-Section MSL_Body_SAR 802.11b Rev2-02

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 50.246$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.35,4.35,4.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Flat-Section MSL_Body_SAR 802.11b Rev2-02/Device

Back_15mm_802.11b_Chan_6_Amb_Temp_23.4C_Liquid_Temp_20.6C/Area Scan (71x51x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.318 W/kg

Flat-Section MSL_Body_SAR 802.11b Rev2-02/Device


Back_15mm_802.11b_Chan_6_Amb_Temp_23.4C_Liquid_Temp_20.6C/Zoom Scan


(31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 5.209 V/m; **Power Drift = -0.010 dB**


Averaged SAR: SAR(1g) = 0.251 W/kg; SAR(10g) = 0.132 W/kg

Maximum value of SAR (interpolated) = 0.488 W/kg


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 109(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

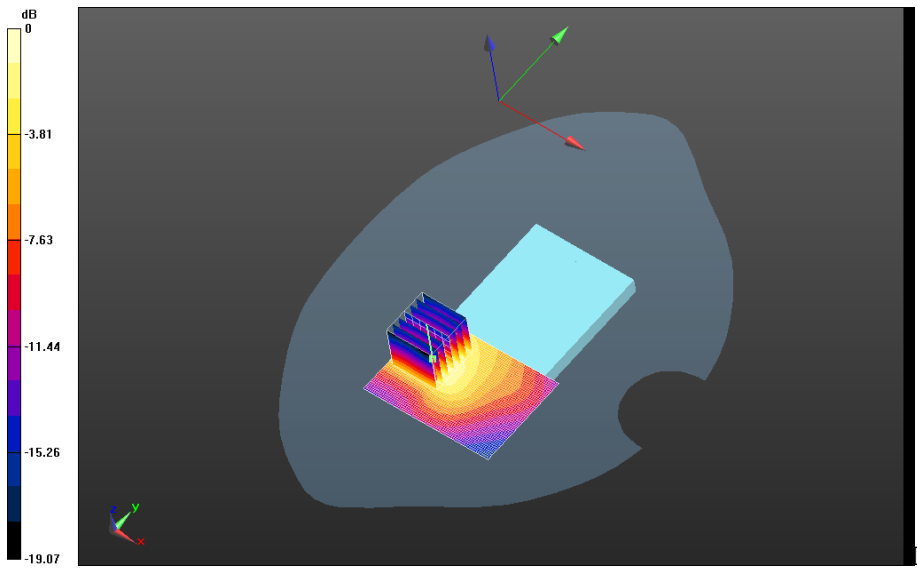

0 dB = 0.683 W/kg = -1.66 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 110(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Bluetooth

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 111(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date: 1/22/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample , Serial: 2641D6A8

Configuration: Flat-Section MSL_Body-Worn SAR - Bluetooth

Communication System: Bluetooth; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz
Medium Parameters used: f=2441 MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 51.135$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1644; ConvF: (4.11,4.11,4.11); Calibrated: 11/13/2012;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.4(1052); SEMCAD X Version 14.6.8 (7028)

Flat-Section MSL_Body-Worn SAR/Device


Back_15mm_Amb_Temp_23.9C_Liquid_Temp_21.6C/Area Scan (71x101x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00434 W/kg


Flat-Section MSL_Body-Worn SAR/Device

Back_15mm_Amb_Temp_23.9C_Liquid_Temp_21.6C/Zoom Scan (51x41x36)/Cube 0:
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 0.356 V/m; **Power Drift = 0.167 dB**


Averaged SAR: SAR(1g) = 0.00104 W/kg; SAR(10g) = 0.000189 W/kg

Maximum value of SAR (interpolated) = 0.0108 W/kg


	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 112(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

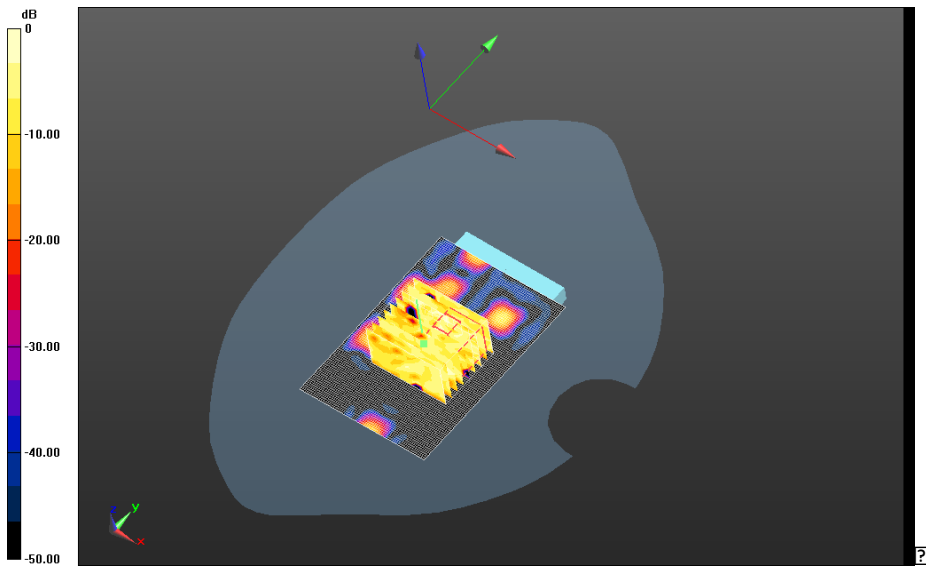

0 dB = 0.0108 W/kg = -19.67 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 113(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

802.11a

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 114(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Date/Time: 2/26/2013 1:06:53 PM

Test Laboratory: RIM Testing Services

Body-worn_SAR_802.11a-Rev 2-02

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 26703205

Communication System: 802.11a ; Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.119$ S/m; $\epsilon_r = 46.984$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF(4.02, 4.02, 4.02); Calibrated: 11/14/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn472; Calibrated: 3/7/2012
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASYS2 52.8.4(1052); SEMCAD X 14.6.8(7028)

Body Worn MSL - 802.11a 5200 MHz/Device Back_15mm_ chan36_Amb_Temp_23.5C_Liquid_Temp_21.7C/Area Scan (91x141x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.426 W/kg

Body Worn MSL - 802.11a 5200 MHz/Device Back_15mm_ chan36_Amb_Temp_23.5C_Liquid_Temp_21.7C/Zoom Scan

(9x9x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.967 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.409 W/kg



Author Data Andrew Becker

Dates of Test Nov 22 2012 – Feb 28 2013


Test Report No RTS-6026-1303-02

FCC ID: L6ARFL110LW L6ARFP120LW

IC 2503A-RFL110LW 2503A-RFP120LW
--

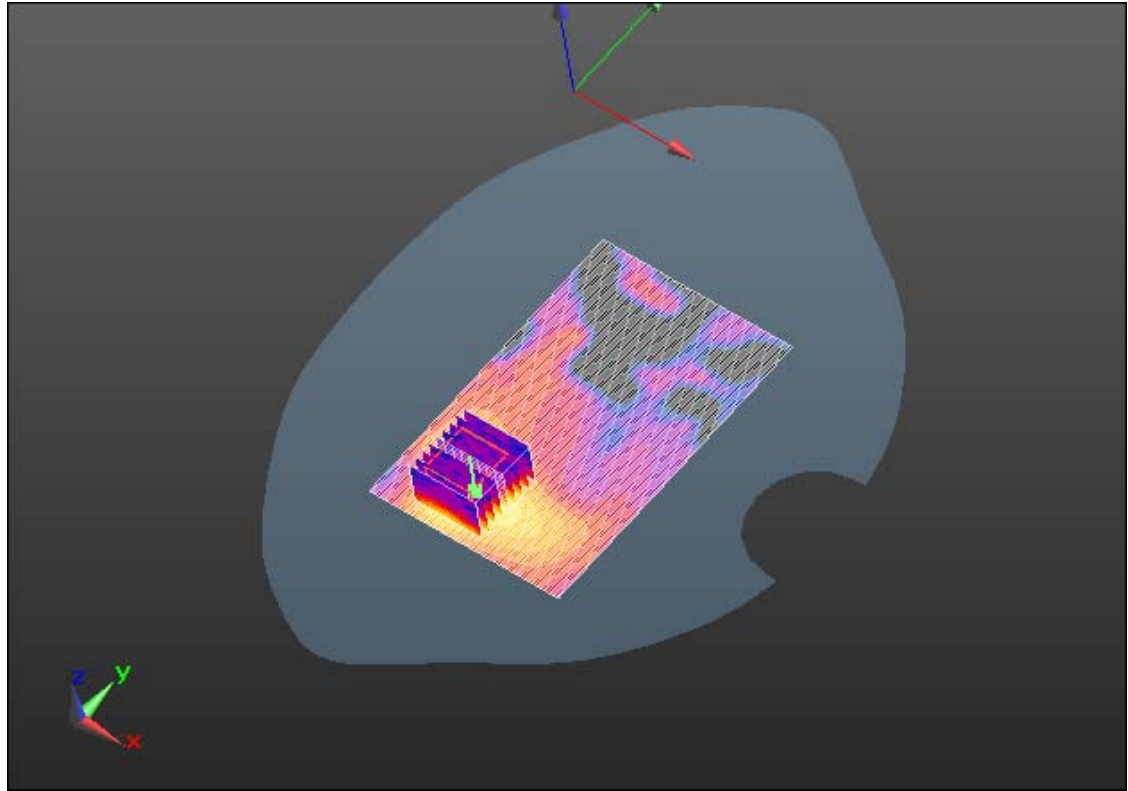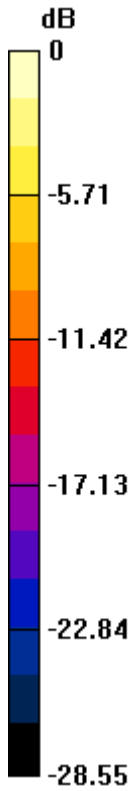

0 dB = 0.409 W/kg = -3.88 dBW/kg

	Document Appendix C1 for the BlackBerry® Smartphone Model RFP121LW SAR Report			Page 116(116)
	Author Data Andrew Becker	Dates of Test Nov 22 2012 – Feb 28 2013	Test Report No RTS-6026-1303-02	FCC ID: L6ARFL110LW L6ARFP120LW

Z axis plot for the worst case body configuration

