		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 1(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

SAR Compliance Test Report

Testing Lab:	BlackBerry RTS 440 Phillip Street Waterloo, Ontario Canada N2L 5R9 Phone: 519-888-7465 Fax: 519-746-0189	Applicant:	BlackBerry Limited 2200 University Ave. East Waterloo, Ontario Canada N2K 0A7 Phone: 519-888-7465 Fax: 519-888-6906
---------------------	---	-------------------	--

Web site: www.BlackBerry.com

Statement of Compliance: BlackBerry RTS declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

Device Category: This BlackBerry® Smartphone is a portable device, designed to be used in direct contact with the user’s head, hand and to be carried in approved accessories when carried on the user’s body.

RF Exposure Environment: This device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in, FCC 47 CFR Part 2.1093, FCC 96-326, IEEE Std. C95.1-1992, Health Canada’s Safety Code 6, as reproduced in RSS-102 issue 4-2010 and has been tested in accordance with the measurement procedures specified in latest FCC OET KDB Procedures, ANSI/IEEE Std. C95.3-2002, IEEE 1528-2013, and RSS 102-issue 4-2010.

Andrew Becker
SAR & HAC Compliance Specialist
(Author of the Test Report)


Daoud Attayi
Compliance Systems Analyst II
SAR & HAC Compliance Lead
(Verification and responsible of the Test Report)

Masud S. Attayi
Manager, Regulatory Compliance
(Approval for the Test Report)

RTS is accredited
according to
EN ISO/IEC 17025 by:




592

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 2(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Note: According to the hardware similarity document BlackBerry model: RFP121LW has a similar design as RFL111LW, except that it also supports UMTS band IV. Due to this similarity, only SAR measurement spot checks were performed on the bands in common. Please refer to report RTS-6026-1302-13 for RFL111LW common modes/bands SAR values.


Revision History		
Rev. Number	Date	Changes
Initial	May 24, 2013	----- ----
Rev 2	Apr 30, 2014	Added measured conducted power data for Wi-Fi Direct/GO mode: 1. Table 1.8.1-3d added on page 16 Updated equipment list to include those used for Wi-Fi Direct testing: 2. Table 2.1.1-1 changed to 2.1.1-1a on page 49 3. Table 2.1.1-1b added on page 50
Rev 3	Dec 16, 2014	Added measured conducted power data for 802.11a Direct/GO and Hotspot mode which will be supported on software 10.3.1.x maintenance release: <ul style="list-style-type: none"> • Table 1.8.1-4d added on page 20 Updated simultaneous transmission results for Hotspot mode <ul style="list-style-type: none"> • Table 1.8.3-1 updated on page 22 • Table 1.9.1-1 updated on page 41 • Table 1.9.1-4a updated on page 44 • Table 1.9.1-5a added on page 50 Added equipment information used for 802.11a Direct/GO and Hotspot testing: <ul style="list-style-type: none"> • Table 2.1.1-1c added on page 54 • Table 3.2-5 added on page 57 • Table 6.1.1-2 added on page 62 Added dipole and dielectric parameters information used for 802.11a Direct/GO and Hotspot testing: <ul style="list-style-type: none"> • Table 4.1-2 added on page 59 • Table 6.2-2 added on page 66 Added 802.11a Hotspot SAR test data <ul style="list-style-type: none"> • Table 11.2-11e added on page 104 Updated References on page 105

Note: According to the hardware similarity document BlackBerry model: RFP121LW has the same Wi-Fi 802.11a Direct/GO and Hotspot mode design as RFL111LW. Therefore, conducted power and radiated SAR testing was done on model RFL111LW and the results reused for this report.

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		3(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

Contents

1.0	OPERATING CONFIGURATIONS AND TEST CONDITIONS.....	5
1.1	PICTURE OF DEVICE.....	5
1.2	ANTENNA DESCRIPTION.....	5
1.3	DEVICE DESCRIPTION.....	5
1.4	BODY WORN ACCESSORIES (HOLSTERS).....	10
1.5	HEADSET.....	10
1.6	BATTERY.....	10
1.7	PROCEDURE USED TO ESTABLISH TEST SIGNAL.....	11
1.8	HIGHLIGHTS OF THE FCC OET SAR MEASUREMENT REQUIREMENTS.....	11
1.8.1	SAR MEASUREMENT PROCEDURES FOR 802.11 A/B/G/N AS PER KDB 248227 D01 V01R02 AND SAR MEASUREMENTS 100 MHZ TO 6 GHZ AS PER KDB 865664 D0 V01.....	11
1.8.2	SAR MEASUREMENT REQUIREMENTS FOR BLUETOOTH.....	21
1.8.3	SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES AS PER KDB 941225 D06 V01.....	21
1.8.4	SAR EVALUATION PROCEDURES FOR LTE AS PER KDB 941225 D05 V02.....	22
1.8.5	SAR EVALUATION PROCEDURES FOR GSM/(E)GPRS DUAL TRANSFER MODE AS PER KDB 941225 D04 V01 AND SAR TEST REDUCTION PROCEDURES GSM GPRS EDGE AS PER DDB 941225 D03 V01.....	33
1.8.6	SAR MEASUREMENT PROCEDURE FOR FAST SAR SCAN AS PER KDB 447498.....	36
1.8.7	SAR MEASUREMENT PROCEDURES FOR 3G DEVICES.....	37
1.9	GENERAL SAR TEST REDUCTION AND EXCLUSION PROCEDURE AS PER KDB 447498 D01 V05 AND SAR HANDSETS MULTI XMITER AND ANT PROCEDURE AS PER 648474 D04 V01.....	40
1.9.1	SIMULTANEOUS TRANSMISSION ANALYSIS.....	41
2.1	SAR MEASUREMENT SYSTEM.....	52
2.1.1	EQUIPMENT LIST.....	53
2.2	DESCRIPTION OF THE TEST SETUP.....	54
2.2.1	DEVICE AND BASE STATION SIMULATOR SETUP.....	54
2.2.2	DASY SETUP.....	55
3.0	ELECTRIC FIELD PROBE CALIBRATION.....	55
3.1	PROBE SPECIFICATIONS.....	55
3.2	PROBE CALIBRATION AND MEASUREMENT UNCERTAINTY.....	55
4.0	SAR MEASUREMENT SYSTEM VERIFICATION.....	58
4.1	SYSTEM ACCURACY VERIFICATION FOR HEAD ADJACENT USE.....	58
5.0	PHANTOM DESCRIPTION.....	60
6.0	TISSUE DIELECTRIC PROPERTIES.....	61
6.1	COMPOSITION OF TISSUE SIMULANT.....	61
6.1.1	EQUIPMENT.....	61
6.2	ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID.....	62
6.2.2	TEST CONFIGURATION.....	66
6.2.3	PROCEDURE.....	66
7.0	SAR SAFETY LIMITS.....	68
8.0	DEVICE POSITIONING.....	69
8.1	DEVICE HOLDER FOR SAM TWIN PHANTOM.....	69
8.2	DESCRIPTION OF THE TEST POSITIONING.....	70
8.2.1	TEST POSITIONS OF DEVICE RELATIVE TO HEAD.....	70
8.2.2	BODY-WORN CONFIGURATION.....	72
8.2.3	LIMB/HAND CONFIGURATION.....	72
9.0	HIGH LEVEL EVALUATION.....	73
9.1	MAXIMUM SEARCH.....	73
9.2	EXTRAPOLATION.....	73
9.3	BOUNDARY CORRECTION.....	73
9.4	PEAK SEARCH FOR 1G AND 10G CUBE AVERAGED SAR.....	73
10.0	MEASUREMENT UNCERTAINTY.....	74
11.0	TEST RESULTS.....	77
11.1	SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE HEAD.....	77
11.2	SAR MEASUREMENT RESULTS AT HIGHEST POWER MEASURED AGAINST THE BODY USING ACCESSORIES.....	91
12.0	REFERENCES.....	105

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 4(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION


APPENDIX B: SAR DISTRIBUTION PLOTS - HEAD CONFIGURATION

APPENDIX C1: SAR DISTRIBUTION PLOTS - BODY-WORN CONFIGURATION

APPENDIX C2: SAR DISTRIBUTION PLOTS - HOT SPOT

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

APPENDIX E: PHOTOGRAPHS

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		5(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

1.1 Picture of Device

Please refer to Appendix E.

Figure 1.1-1 BlackBerry Smartphone


1.2 Antenna description

Type	Internal fixed antenna
Location	Please refer to Figure 1.9-1
Configuration	Internal fixed antenna

Table 1.2-1 Antenna description

1.3 Device description

Device Model	RFL111LW			
FCC ID	L6ARFL110LW			
PIN	Radiated: 25CF0AD9 (Rev2), 2668C71D (Rev3) Conducted: 25CF0ADB (Rev2), 2668C70C (Rev3)			
Hardware Rev	Rev 2-905-00/01, Rev 3-906-01/03/04			
Software Version	127.0.1.2982/3123/3454/3901, MFI 4 0 11-180/181, 10.3.1.1817			
Prototype or Production Unit	Production			
Mode(s) of Operation	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
Nominal Maximum conducted RF Output Power (dBm)	33.5 29.0	30.0 28.5	29.0 26.0	27.5 25.0
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	± 0.5
Duty Cycle	1:8	2:8	3:8	4:8
Transmitting Frequency Range (MHz)	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
Mode(s) of Operation	802.11a/n (low band)	802.11a/n (middle band)	802.11a/n (upper band I)	802.11a/n (upper band II)
Nominal Maximum conducted RF Output Power (dBm)	13.0	14.5	16.5	11.5
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	± 0.5
Duty Cycle	1:1	1:1	1:1	1:1
Transmitting Frequency Range (MHz)	5180-5240	5260-5320	5500-5700	5749-5825
Mode(s) of Operation	802.11b	802.11g	802.11n	Bluetooth
Nominal Maximum conducted RF Output Power (dBm)	19.0	18.5	16.0	10.0
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 6(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	


Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	2412-2462	2412-2462	2412-2462	2402-2483
Mode(s) of Operation	HSPA ⁺ / WCDMA / UMTS FDD V (850)	HSPA ⁺ / WCDMA / UMTS FDD II (1900)	NFC	
Nominal Maximum conducted RF Output Power (dBm)	24.5	22.5	N/A	
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	N/A	
Duty Cycle	1:1	1:1	N/A	
Transmitting Frequency Range (MHz)	824.6 – 846.6	1852.4 – 1907.6	13.56	

Table 1.3-1a RFL111LW test device characterization non-LTE U.S. wireless operating modes/bands

Note 1: The BlackBerry model: RFL111LW also supports GSM/GPRS/EDGE 900/1800 MHz, that are not operational in North America, therefore no data is presented in this report for those bands.

Note 2: SAR measurements on NFC haven't been conducted, since it is very low power and frequency magnetic field transceiver. SAR probes measure higher frequency/power electric field.

Device Model	RFP121LW			
FCC ID	L6ARFP120LW			
PIN	Radiated: 2641D6A8 (Rev1), 26703205 (Rev2) Conducted: 2641D663 (Rev1), 267031FC (Rev2)			
Hardware Rev	Rev1-905-00, Rev2-906-01			
Software Version	127.0.1.3123/3694/3901, MFI 4 0 11-180/181, 10.3.1.1817			
Prototype or Production Unit	Production			
Mode(s) of Operation	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
Nominal Maximum conducted RF Output Power (dBm)	33.5 29.0	30.0 28.5	29.0 26.0	27.5 25.0
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	± 0.5
Duty Cycle	1:8	2:8	3:8	4:8
Transmitting Frequency Range (MHz)	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
Mode(s) of Operation	802.11a/n (low band)	802.11a/n (middle band)	802.11a/n (upper band I)	802.11a/n (upper band II)


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 7(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Nominal Maximum conducted RF Output Power (dBm)	13.0	14.5	16.5	11.5
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	± 0.5
Duty Cycle	1:1	1:1	1:1	1:1
Transmitting Frequency Range (MHz)	5180-5240	5260-5320	5500-5700	5749-5825
Mode(s) of Operation	802.11b	802.11g	802.11n	Bluetooth
Nominal Maximum conducted RF Output Power (dBm)	19.0	18.5	16.0	10.0
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	2412-2462	2412-2462	2412-2462	2402-2483
Mode(s) of Operation	HSPA+ / WCDMA / UMTS FDD V (850)	HSPA+ / WCDMA / UMTS FDD IV (1800)	HSPA+ / WCDMA / UMTS FDD II (1900)	NFC
Nominal Maximum conducted RF Output Power (dBm)	24.5	22.0	22.5	N/A
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	824.6 – 846.6	1712.4 – 1752.6	1852.4 – 1907.6	13.56

Table 1.3-1b RFP121LW test device characterization non-LTE U.S. wireless operating modes/bands


Note 1: The BlackBerry model: RFP120LW also supports GSM/GPRS/EDGE 900/1800 MHz, that are not operational in North America, therefore no data is presented in this report for those bands.

Note 2: SAR measurements on NFC haven't been conducted, since it is very low power and frequency magnetic field transceiver. SAR probes measure higher frequency/power electric field.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 8(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW


Device Model	RFL111LW			
FCC ID	L6ARFL110LW			
PIN	Radiated: 25CF0AD9 (Rev2), 2668C71D (Rev3) Conducted: 25CF0ADB (Rev2), 2668C70C (Rev3)			
Hardware Rev	Rev 2-905-00/01, Rev 3-906-01/03/04			
Software Version	127.0.1.2982/3123/3454/3901, MFI 4 0 11-180/181, 10.3.1.1817			
Prototype or Production Unit	Production			
Transmission channel bandwidth	Band 2: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 4: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 5: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz Band 17: 5 MHz, 10 MHz			
Transmission channel number and frequencies				
	LTE band 2		LTE band 4	
	f (MHz)	Chan.	f (MHz)	Chan.
L	1860.0	18700	1720.0	20050
M	1880.0	18900	1732.5	20175
H	1900.0	19100	1745.0	20300
	LTE band 5		LTE band 17	
	f (MHz)	Chan.	f (MHz)	Chan.
L	829.0	20450	709.0	23780
M	836.5	20525	710.0	23790
H	844.0	20600	711.0	23800
UE Category	Category 3			
Modulation supported in uplink	QPSK, 16QAM			
Description of LTE antenna	1 Tx/Rx Ant, Sharing with GSM/UMTS;			
LTE voice available/supported	third party VOIP application might be possible			
Hotspot with LTE+WiFi	Yes			
Hotspot with LTE+WiFi active with GSM/UMTS voice	No			
LTE MPR permanently built-in by design	Yes			
LTE A-MPR	Disabled during SAR testing , by setting NV value to NV_01 on the CMW500			
LTE maximum average power (dBm)	Band 2: 22.34 Band 4: 23.83 Band 5: 23.78 Band 17: 23.70			
Other non-LTE U.S. wireless operating modes/bands	GSM//WCDMA/HSPA ⁺		GSM 835 MHz UMTS/WCDMA 850 MHz GSM 1900 MHz UMTS/WCDMA 1900 MHz	
	WiFi and BT		2.4 GHz Wi-Fi 5 GHz Wi-Fi 2.4 GHz BT	
Simultaneous Tx conditions	Please refer to section 1.9: Highlights of the FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters/ Antennas & GSM/GPRS/EDGE Procedure.			
Power reduction applied for SAR compliance	Yes, please refer to sections 1.8.4 and 1.10			

Table 1.3-2a RFL111LW test device characterization all U.S. wireless operating modes/bands

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 9(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Device Model	RFP121LW			
FCC ID	L6ARFP120LW			
PIN	Radiated: 2641D6A8 (Rev1), 26703205 (Rev2) Conducted: 2641D663 (Rev1), 267031FC (Rev2)			
Hardware Rev	Rev1-905-00, Rev2-906-01			
Software Version	127.0.1.3123/3694/3901, MFI 4 0 11-180/181, 10.3.1.1817			
Prototype or Production Unit	Production			
Transmission channel bandwidth	Band 2: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 4: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 5: 1.4 MHz , 3 MHz , 5 MHz, 10 MHz Band 17: 5 MHz, 10 MHz			
Transmission channel number and frequencies				
	LTE band 2		LTE band 4	
	f (MHz)	Chan.	f (MHz)	Chan.
L	1860.0	18700	1720.0	20050
M	1880.0	18900	1732.5	20175
H	1900.0	19100	1745.0	20300
	LTE band 5		LTE band 17	
	f (MHz)	Chan.	f (MHz)	Chan.
L	829.0	20450	709.0	23780
M	836.5	20525	710.0	23790
H	844.0	20600	711.0	23800
UE Category	Category 3			
Modulation supported in uplink	QPSK, 16QAM			
Description of LTE antenna	1 Tx/Rx Ant, Sharing with GSM/UMTS;			
LTE voice available/supported	third party VOIP application might be possible			
Hotspot with LTE+WiFi	Yes			
Hotspot with LTE+WiFi active with GSM/UMTS voice	No			
LTE MPR permanently built-in by design	Yes			
LTE A-MPR	Disabled during SAR testing , by setting NV value to NV_01 on the CMW500			
LTE maximum average power (dBm)	Band 2: 23.23 Band 4: 23.83 Band 5: 23.78 Band 17: 23.70			
Other non-LTE U.S. wireless operating modes/bands	GSM//WCDMA/HSPA ⁺		GSM 835 MHz UMTS/WCDMA 850 MHz GSM 1900 MHz UMTS/WCDMA 1700 MHz UMTS/WCDMA 1900 MHz	
	WiFi and BT		2.4 GHz Wi-Fi 5 GHz Wi-Fi 2.4 GHz BT	
Simultaneous Tx conditions	Please refer to section 1.9: Highlights of the FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters/ Antennas & GSM/GPRS/EDGE Procedure.			
Power reduction applied for SAR compliance	Yes, please refer to sections 1.8.4 and 1.10			

Table 1.3-2b RFP121LW test device characterization all U.S. wireless operating modes/bands

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 10(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Note 2: As per 3GPP TS 36.521-1 V10.0.0 (2011-12):

“The channel numbers that designate carrier frequencies so close to the operating band edges that the carrier extends beyond the operating band edge shall not be used. This implies that the first 7, 15, 25, 50, 75 and 100 channel numbers at the lower operating band edge and the last 6, 14, 24, 49, 74 and 99 channel numbers at the upper operating band edge shall not be used for channel bandwidths of 1.4, 3, 5, 10, 15 and 20 MHz respectively.”...5.4.4

1.4 Body worn accessories (holsters)

The device has been tested with the holsters listed below. The holster has been designed with the intended device orientation being with the LCD facing the belt clip only. Proper positioning is vital for protection of the LCD display, and to help maximize the battery life of the device. The device can also be placed in the holster with the backside facing the belt clip. Body SAR measurements were carried out with the worst-case configuration front LCD side and backside towards the belt clip.

Number	Holster Type	Part Number	Separation distance (mm)
1	Vertical Holster, Leather	HDW-50678-001	20
2	Vertical Holster, alt Leather	HDW-50677-001	20

Table 1.4-1 Body worn holster

Note: Holsters have identical design, except for different leather material being used.

Please refer to Appendix E.

Figure 1.4-1 Body-worn holster

1.5 Headset


The device was tested with and without the following headset model numbers.

- 1) HDW-24529-004
- 2) HDW-15766-005
- 3) HDW-44306-001

1.6 Battery

The device was tested with the following Lithium Ion Battery packs.

- 1)BAT-49702-002 (1800mA)
- 2)BAT-52961-002 (2100mA)

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		11(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

1.7 Procedure used to establish test signal

- The device was put into test mode for SAR measurements by placing a call from a Rohde & Schwarz CMU 200 or CMW 500 Communications Test Instrument. The power control level was set to command the device to transmit at full power at the specified frequency. Other parameters include: Channel type = full rate, discontinuous transmission off, frequency hopping off. For LTE specific bandwidths, number of resource blocks, and resource block offsets were set. In addition, LTE A-MPR was disabled.
- Software Tool was used to set WiFi to transmit at maximum power and duty cycle for each band, channel, and modulation.

1.8 Highlights of the FCC OET SAR Measurement Requirements


1.8.1 SAR Measurement Procedures for 802.11 a/b/g/n as per KDB 248227 D01 v01r02 and SAR Measurements 100 MHz to 6 GHz as per KDB 865664 D0 V01

- Repeat measurements when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement was performed to reaffirm that the results are not expected to have substantial variations. An additional repeated measurement is required only if the measured results are within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties.
- Maintained dielectric parameter uncertainty to $\pm 5.0\%$ of the target values, (although it is very challenging to control/maintain both permittivity and conductivity for 5-6 GHz for all test channels within $\pm 5.0\%$ of the target values, some conductivity values were measured slightly higher which resulted in more conservative SAR values.
- Liquid depth from SAM ERP or flat phantom was kept at 15 cm.
- Probe Requirement: Used SPEAG probe model ET3DV6/ES3DV3 for 2.45 GHz and EX3DV4 for 5-6 GHz SAR testing specs are outlined below:

ET3DV6/ES3DV3	
Probe tip to sensor center	2.7 mm / 2.0 mm
Probe tip diameter is	6.8 mm / 4.0 mm
Probe calibration uncertainty	$< 15\%$ for $f = 2.45$ GHz
Probe calibration range	± 100 MHz
EX3DV4	
Probe tip to sensor center	1.0 mm
Probe tip diameter is	2.5 mm
Probe calibration uncertainty	$< 15\%$ for $f = 2.45$ to < 6.0 GHz
Probe calibration range	± 100 MHz

Table 1.8.1-1 Probe specification requirements

- Area scan resolution was maintained at 10mm (5-6 GHz)
- Area scan resolution was maintained at 12mm (2-3 GHz)
- Area scan resolution was maintained at 15mm (≤ 2 GHz)
- System accuracy validation was conducted within ± 100 MHz of device mid-band frequency and results were within $\pm 10\%$ of the manufacturers target value for each band.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 12(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW


- Zoom Scan: The following settings were used for the validation and measurement.

ET3DV6/ES3DV3	
Closest Measurement Point to Phantom	4.0 mm
Zoom Scan (x,y) Resolution	7.5 mm (≤ 2 GHz) or 5 mm (2-3 GHz)
Zoom Scan (z) Resolution	5.0 mm
Zoom Scan Volume	Minimum 30 x 30 x 30 mm ¹
EX3DV4	
Closest Measurement Point to Phantom	2.0 mm
Zoom Scan (x,y) Resolution	4.0 mm (5-6 GHz)
Zoom Scan (z) Resolution	2.0 mm (5-6 GHz)
Zoom Scan Volume	Minimum 22 x 22 x 22 mm ¹

Table 1.8.1-2 Zoom Scan requirement


Note 1: “Auto-extend zoom scan when maxima on boundary” is enabled, which can result in the zoom scan dimensions varying between 30x30x30 to 60x60x30 mm and 22x22x22 to 48x40x22 mm.

- Frequency Channel Configuration: 802.11 b/g modes are tested on “default test channels” 1, 6 and 11.
- 802.11a is tested for UNII operations on the highest output power channel of each sub band (low, mid, upper band I, and upper band II). If the highest output power channel has a SAR level that is not 3dB lower than the limit, then the low, mid, and high channels of each sub band must also be tested.
- For each frequency band, testing at higher rates and higher modulations is not required when the maximum average output power for each of these configurations is less than ¼ dB higher than those measured at the lowest data rate.
- SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.
- SAR test was conducted on each “default test channel” and each band with the worst case modulation and highest duty cycle, if the SAR level was within 3dB of the limit.
- Conducted power measurements:

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 13(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW


802.11b @ 1Mbps		802.11g @ 6Mbps		802.11n @ 6.5 Mbps	
Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)
1	19.61	1	18.96	1	16.47
6	19.71	6	19.08	6	16.52
11	19.63	11	18.99	11	16.40
		802.11g		802.11b	
Data Rate (Mbps)	Mod.	Channel 6	Data Rate (Mbps)	Mod.	Channel 6
		Cond. Power (dBm)			Cond. Power
6	BPSK	19.06	1	BPSK	19.71
9	BPSK	19.00	2	DQPSK	19.62
12	QPSK	17.73	5.5	CCK	19.59
18	QPSK	17.52	11	CCK	19.51
24	16-QAM	16.29	22	CCK	19.52
36	16-QAM	16.11			
48	64-QAM	14.75			
54	64-QAM	14.70			
				802.11 n	
Data Rate (Mbps)		Mod.		Channel 6	
				Cond. Power (dBm)	
6.5		MCS0		16.61	
13		MCS1		16.49	
19.5		MCS2		15.19	
26		MCS3		15.05	
39		MCS4		13.68	
52		MCS5		13.52	
58.5		MCS6		12.53	
65		MCS7		12.48	

Table 1.8.1-3a 802.11 b/g/n modulation type/data rate vs. conducted power (Rev2-01)

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 14(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	


802.11b @ 1Mbps		802.11g @ 6Mbps		802.11n @ 6.5 Mbps	
Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)
1	17.90	1	15.18	1	15.00
6	17.95	6	15.37	6	15.18
11	17.90	11	12.14	11	11.95
		802.11g			802.11b
Data Rate (Mbps)	Mod.	Channel 6	Data Rate (Mbps)	Mod.	Channel 6
		Cond. Power (dBm)			Cond. Power (dBm)
6	BPSK	15.37	1	BPSK	17.95
9	BPSK	15.32	2	DQPSK	17.94
12	QPSK	15.10	5.5	CCK	17.84
18	QPSK	15.11	11	CCK	17.79
24	16-QAM	15.00	22	CCK	17.77
36	16-QAM	14.70			
48	64-QAM	14.53			
54	64-QAM	14.43			
			802.11 n		
Data Rate (Mbps)	Mod.	Channel 6			
		Cond. Power (dBm)			
6.5	MCS0	15.18			
13	MCS1	15.06			
19.5	MCS2	14.97			
26	MCS3	14.84			
39	MCS4	13.75			
52	MCS5	13.55			
58.5	MCS6	12.58			
65	MCS7	12.47			

**Table 1.8.1-3b 802.11 b/g/n modulation type/data rate vs. conducted power
(Rev3-01/03)**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 15(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW


802.11b @ 1Mbps		802.11g @ 6Mbps		802.11n @ 6.5 Mbps	
Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)	Chan	Cond. Power (dBm)
1	19.37	1	16.35	1	16.27
6	19.47	6	18.80	6	16.31
11	19.37	11	13.07	11	12.97
13	12.43	13	12.00	13	11.85
		802.11g			
Data Rate (Mbps)	Mod.	Channel 6	Data Rate (Mbps)	Mod.	Channel 6
		Cond. Power (dBm)			Cond. Power (dBm)
6	BPSK	18.80	1	BPSK	19.47
9	BPSK	18.67	2	DQPSK	19.38
12	QPSK	17.70	5.5	CCK	19.23
18	QPSK	17.54	11	CCK	19.16
24	16-QAM	16.31	22	CCK	19.10
36	16-QAM	16.11			
48	64-QAM	14.80			
54	64-QAM	14.73			
				802.11 n	
Data Rate (Mbps)	Mod.			Channel 6	
				Cond. Power (dBm)	
6.5	MCS0			16.31	
13	MCS1			16.21	
19.5	MCS2			15.14	
26	MCS3			15.00	
39	MCS4			13.79	
52	MCS5			13.56	
58.5	MCS6			12.45	
65	MCS7			12.43	

Table 1.8.1-3c 802.11 b/g/n modulation type/data rate vs. conducted power (Rev3-04)

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 16(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	


802.11b @ 1Mbps			802.11g @ 6Mbps			802.11n @ 6.5 Mbps		
f (MHz)	Chan	Max. average conducted power (dBm)	f (MHz)	Chan	Max. average conducted power (dBm)	f (MHz)	Chan	Max. average conducted power (dBm)
2412	1	13.3	2412	1	13.2	2412	1	13.3
2437	6	13.7	2437	6	13.6	2437	6	13.7
2462	11	13.5	2462	11	13.6	2462	11	13.5
802.11g					802.11b			
Data Rate (Mbps)	Mod.	Channel 6		Data Rate (Mbps)	Mod.	Channel 6		
		Max. average conducted power (dBm)				Max. average conducted power (dBm)		
18	QPSK	13.6		5.5	CCK	13.6		
54	64-QAM	13.6		11	CCK	13.6		
802.11 n								
Data Rate (Mbps)		Mod.		Channel 6				
				Max. average conducted power (dBm)				
26		MCS3		13.6				
65		MCS7		13.6				

**Table 1.8.1-3d 802.11 b/g/n modulation type/data rate vs. conducted power (Rev3-04)
in Wi-Fi Direct/GO mode**

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			17(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC		
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW		


802.11a (low band) 6Mbps			802.11a (mid band) 6Mbps			802.11a (upper band I) 6Mbps		
Chan	f (MHz)	Cond. Power (dBm)	Chan	f(MHz)	Cond. Power (dBm)	Chan	f(MHz)	Cond. Power (dBm)
36	5180	19.21	52	5260	19.34	104	5520	19.65
40	5200	19.25	56	5280	19.30	116	5580	19.36
44	5220	19.28	60	5300	19.31	124	5620	19.20
48	5240	19.34	64	5320	19.25	140	5700	18.71
						802.11a (upper band II) 6Mbps		
						Chan	f(MHz)	Cond. Power (dBm)
						149	5745	16.28
						153	5765	16.00
						157	5785	15.91
						161	5805	15.87
						165	5825	15.79
Data Rate (Mbits)	Mod.	802.11a (lower band)	802.11a (middle band)	802.11a (upper band I)	802.11a (upper band II)			
		Channel 48	Channel 52	Channel 104	Channel 149			
		Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)			
6	BPSK	19.34	19.34	19.68	16.28			
9	BPSK	19.31	19.28	19.61	16.23			
12	QPSK	19.29	19.31	19.59	16.19			
18	QPSK	19.30	19.30	19.61	16.20			
24	16-QAM	19.31	19.25	19.59	16.21			
36	16-QAM	19.30	19.31	19.62	16.22			
48	64-QAM	19.28	19.29	19.63	16.20			
54	64-QAM	19.30	19.32	19.60	16.18			
	802.11n (lower band)	802.11n (middle band)	802.11n (upper band I)	802.11n (upper band II)				
	Channel 48	Channel 52	Channel 104	Channel 149				
	Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)				
MCS0	18.41	18.44	19.64	16.21				
MCS1	18.39	18.40	19.67	16.24				
MCS2	18.37	18.41	19.66	16.20				
MCS3	18.35	18.39	19.65	16.21				
MCS4	18.36	18.43	19.68	16.22				
MCS5	18.38	18.40	19.64	16.19				
MCS6	18.34	18.42	19.67	16.23				
MCS7	18.36	18.42	19.61	16.24				

Table 1.8.1-4a 802.11 a/n modulation type/data rate vs. conducted power (Rev2-01)

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 18(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	


802.11a (low band) 6Mbps			802.11a (mid band) 6Mbps			802.11a (upper band I) 6Mbps		
Chan	f (MHz)	Cond. Power (dBm)	Chan	f(MHz)	Cond. Power (dBm)	Chan	f(MHz)	Cond. Power (dBm)
36	5180	13.21	52	5260	12.90	104	5520	11.90
40	5200	13.10	56	5280	12.87	116	5580	11.70
44	5220	13.07	60	5300	12.80	124	5620	11.50
48	5240	13.00	64	5320	13.65	140	5700	11.25
						802.11a (upper band II) 6Mbps		
						Chan	f(MHz)	Cond. Power (dBm)
						149	5745	10.92
						153	5765	10.89
						157	5785	10.88
						161	5805	10.90
						165	5825	10.85
		802.11a (lower band)	802.11a (middle band)	802.11a (upper band I)	802.11a (upper band II)			
Data Rate (Mbits)	Mod.	Channel 36	Channel 64	Channel 104	Channel 149			
		Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)			
6	BPSK	12.21	13.65	11.90	10.90			
9	BPSK	13.17	13.62	11.78	10.82			
12	QPSK	13.13	13.55	11.72	10.78			
18	QPSK	13.00	13.46	11.62	10.66			
24	16-QAM	12.63	13.35	11.40	10.45			
36	16-QAM	12.45	13.04	11.20	10.29			
48	64-QAM	12.42	12.88	10.94	10.10			
54	64-QAM	12.35	12.85	10.92	9.91			
		802.11n (lower band)	802.11n (middle band)	802.11n (upper band I)	802.11n (upper band II)			
		Channel 36	Channel 64	Channel 104	Channel 149			
		Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)			
MCS0		13.05	13.52	11.70	10.81			
MCS1		13.04	13.45	11.51	10.64			
MCS2		12.83	13.31	11.42	10.52			
MCS3		12.75	13.20	11.34	10.35			
MCS4		12.50	13.00	11.05	10.20			
MCS5		12.35	12.74	10.91	9.90			
MCS6		12.27	12.72	10.81	9.85			
MCS7		12.24	12.64	10.75	9.77			

Table 1.8.1-4b 802.11 a/n modulation type/data rate vs. conducted power (Rev3-01/03)

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			19(105)	
Author Data	Dates of Test	Test Report No	FCC ID:		IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

802.11a (low band) 6Mbps			802.11a (mid band) 6Mbps			802.11a (upper band I) 6Mbps		
Chan	f (MHz)	Cond. Power (dBm)	Chan	f(MHz)	Cond. Power (dBm)	Chan	f(MHz)	Cond. Power (dBm)
36	5180	13.35	52	5260	14.96	104	5520	16.78
40	5200	13.18	56	5280	14.93	116	5580	16.45
44	5220	13.19	60	5300	14.86	124	5620	16.36
48	5240	13.10	64	5320	12.82	140	5700	14.21
						802.11a (upper band II) 6Mbps		
						Chan	f(MHz)	Cond. Power (dBm)
						149	5745	11.95
						153	5765	11.96
						157	5785	11.96
						161	5805	11.97
						165	5825	11.99
		802.11a (lower band)	802.11a (middle band)	802.11a (upper band I)	802.11a (upper band II)			
Data Rate (Mbits)	Mod.	Channel 36	Channel 52	Channel 104	Channel 165			
		Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)			
6	BPSK	13.35	14.96	16.78	11.95			
9	BPSK	13.30	15.00	16.63	11.93			
12	QPSK	13.16	14.97	16.57	11.83			
18	QPSK	13.10	14.85	16.47	11.66			
24	16-QAM	13.00	14.65	16.39	11.52			
36	16-QAM	12.63	14.43	16.16	11.32			
48	64-QAM	12.37	14.28	14.85	11.07			
54	64-QAM	12.44	14.10	14.82	11.00			
		802.11n (lower band)	802.11n (middle band)	802.11n (upper band I)	802.11n (upper band II)			
		Channel 36	Channel 52	Channel 104	Channel 165			
Mod.		Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)	Cond. Power (dBm)			
MCS0		13.15	14.96	16.77	11.85			
MCS1		13.12	14.83	16.58	11.72			
MCS2		12.96	14.56	16.47	11.53			
MCS3		12.86	14.55	16.21	11.44			
MCS4		12.64	14.30	14.99	11.20			
MCS5		12.43	14.15	14.84	11.06			
MCS6		12.21	14.12	13.63	10.92			
MCS7		12.19	14.00	13.61	10.82			


Table 1.8.1-4c 802.11 a/n modulation type/data rate vs. conducted power (Rev3-04)

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 20(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

802.11a/n Conducted Power in WiFi Direct/GO/Hotspot Mode					
802.11a (low band) 6Mbps			802.11a (upper band II) 6Mbps		
f (MHz)	Chan	Max. average conducted power (dBm)	f (MHz)	Chan	Max. average conducted power (dBm)
5180	36	13.10	5745	149	12.00
5200	40	13.10	5765	153	11.95
5220	44	13.05	5785	157	11.95
5240	48	13.00	5805	161	11.90
			5825	165	11.90
		802.11a (lower band)			802.11 a (upper band II)
		Channel 36			Channel 153
Data Rate (Mbits)		Max. average conducted power (dBm)			Max. average conducted power (dBm)
6		13.10			12.00
24		13.05			12.00
54		13.05			12.00
		802.11n (lower band)			802.11n (upper band II)
		Channel 36			Channel 153
Mod.	Max. average conducted power (dBm)		Max. average conducted power (dBm)		
MCS0	13.10		12.00		
MCS4	13.05		11.95		
MCS7	13.05		12.00		

Table 1.8.1-4d 802.11 a/n modulation type/data rate vs. maximum average conducted power in 802.11a Direct/Go and Hotspot mode

Note: 802.11a/n Hotspot mode does not support channels 52-140

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		21(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW

1.8.2 SAR Measurement Requirements for Bluetooth

Channel	Freq (MHz)	Mode	Conducted Transmit Power (dBm)
0	2402	DH5	9.8
39	2441	DH5	10.2
78	2480	DH5	9.9

Table 1.8.2-1 Bluetooth peak conducted power measurements

1.8.3 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities as per KDB 941225 D06 v01

Standalone personal wireless routers and handsets with hotspot mode capabilities must address hand-held and other near-body exposure conditions to show SAR compliance. The following procedures are applicable when the overall device length and width are ≥ 9 cm x 5 cm respectively. A test separation of 10 mm is required. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25 mm from that surface or edge, for the data modes, wireless technologies and frequency bands supporting hotspot mode. The standalone SAR results in each device test orientation must be analyzed for the applicable hotspot mode simultaneous transmission configurations to determine SAR test exclusion and volume scan requirements.

Static/fixed power reduction scheme on the following modes/bands have been implemented when Hotspot Mode is enabled or active to comply with body SAR with 10 mm test separation from flat phantom on standalone transmitter and multi-band simultaneous transmission conditions:

- EDGE/GPRS 850: back off 3 dB
- LTE B4: back off 1 dB
- LTE B5: back off 2 dB

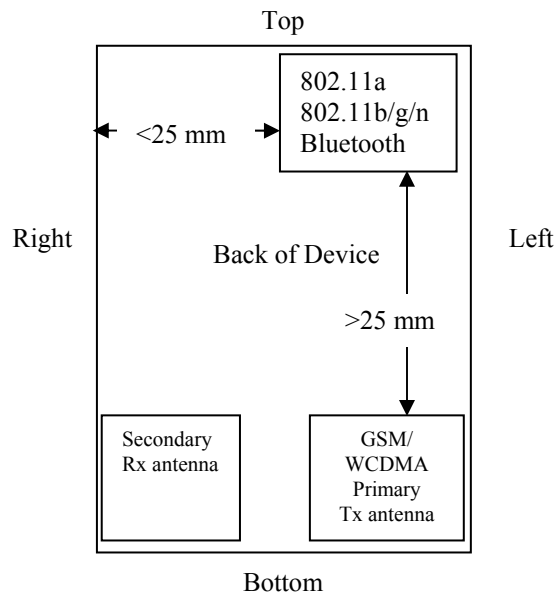



Figure 1.8.3-1 Identification of all sides for SAR Testing

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			22(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

Note: According to FCC guidance, Hotspot SAR testing is not required on any edge that is more than 2.5 cm from the transmitting antenna.

Hotspot Sides for SAR Testing						
Mode	Front	Back	Top	Bottom	Left	Right
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
WCDMA/HSPA 850	Yes	Yes	No	Yes	Yes	Yes
WCDMA/HSPA 1700	Yes	Yes	No	Yes	Yes	Yes
WCDMA/HSPA 1900	Yes	Yes	No	Yes	Yes	Yes
LTE band 2	Yes	Yes	No	Yes	Yes	Yes
LTE band 4	Yes	Yes	No	Yes	Yes	Yes
LTE band 5	Yes	Yes	No	Yes	Yes	Yes
LTE band 17	Yes	Yes	No	Yes	Yes	Yes
Bluetooth 2.4GHz	Yes	Yes	Yes	No	Yes	Yes
802.11b 2.4GHz	Yes	Yes	Yes	No	Yes	No
802.11a 5 GHz	Yes	Yes	Yes	No	Yes	No

Table 1.8.3-1 Identification of all sides for SAR Testing

1.8.4 SAR Evaluation Procedures for LTE as per KDB 941225 D05 v02

“1. QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and *required test channel* combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each *required test channel*. When the *reported SAR* is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and *required test channels* is not required for 1 RB allocation; otherwise, SAR is required for the remaining *required test channels* and only for the RB offset configuration with the highest output power for that channel.6 When the *reported SAR* of a *required test channel* is > 1.45 W/kg, SAR is required for all three RB offset configurations for that *required test channel*.

2. QPSK with 50% RB allocation


The procedures required for 1 RB allocation in 1. are applied to measure the SAR for QPSK with 50% RB allocation.

3. QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest *reported SAR* for 1 RB and 50% RB allocation in 1. and 2. are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the *reported SAR* is > 1.45 W/kg, the remaining *required test channels* must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 1. and 2.and 3. to determine the QAM configurations that may need SAR measurement.

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		23(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW

For each configuration

identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the *reported* SAR for the QPSK configuration is > 1.45 W/kg.

4. Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported* SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

The equivalent channel configuration for the RB allocation, RB offset and modulation etc. Is determined for the smaller channel bandwidth according to the same number of RB allocated in the


largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to

5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth.


However, 50% RB allocation in 10 MHz channel bandwidth

is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.”

- MPR has been implemented permanently by the manufacturer as per 3GPP TS36.101
- A-MPR was disabled for all SAR measurements.
 - LTE Head SAR was evaluated to cover third-party VoIP applications at full power.
 - LTE Head SAR was evaluated in SVLTE mode at lowered LTE power.
- According to “3GPP TS 36.521-1 V10.0.0 (2011-12)”:
 - “The channel numbers that designate carrier frequencies so close to the operating band edges that the carrier extends beyond the operating band edge shall not be used. This implies that the first 7, 15, 25, 50, 75 and 100 channel numbers at the lower operating band edge and the last 6, 14, 24, 49, 74 and 99 channel numbers at the upper operating band edge shall not be used for channel bandwidths of 1.4, 3, 5, 10, 15 and 20 MHz respectively.”...

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			24(105)
Author Data	Dates of Test	Test Report No	FCC ID:		IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW


Band	LTE Band 2					
Frequency (MHz)	Channel	BW	Modulation	RB Size	RB Offset	Maximum Avg. Power (dBm)
1860	18700	20 MHz	QPSK	1	0	22.33
			QPSK	1	50	22.22
			QPSK	1	99	22.22
			QPSK	50	0	20.90
			QPSK	50	50	20.88
			QPSK	100	0	20.99
			16QAM	1	0	21.15
			16QAM	1	50	20.78
			16QAM	1	99	20.86
			16QAM	75	0	19.97
			16QAM	75	25	19.89
1880	18900	20 MHz	QPSK	1	0	22.34
			QPSK	1	50	22.24
			QPSK	1	99	22.23
			QPSK	50	0	21.00
			QPSK	50	50	20.95
			QPSK	100	0	20.98
			16QAM	1	0	21.05
			16QAM	1	50	21.00
			16QAM	1	99	21.05
			16QAM	75	0	19.94
			16QAM	75	25	19.88
1900	19100	20 MHz	QPSK	1	0	22.18
			QPSK	1	50	22.08
			QPSK	1	99	22.12
			QPSK	50	0	20.90
			QPSK	50	50	20.94
			QPSK	100	0	20.99
			16QAM	1	0	21.16
			16QAM	1	50	21.19
			16QAM	1	99	21.10
			16QAM	75	0	19.86
			16QAM	75	25	19.89
1860	18700	15 MHz	QPSK	1	0	22.35
			QPSK	1	74	22.20
			QPSK	36	39	20.94
			QPSK	75	0	20.90
			16QAM	1	0	21.15
			16QAM	1	74	21.07
			16QAM	16	59	21.10
1860	18700	10 MHz	16QAM	75	0	19.94
			QPSK	1	0	22.32
			QPSK	1	49	22.24
			QPSK	25	0	21.00
			QPSK	50	0	20.94
			16QAM	1	0	21.06
			16QAM	1	49	20.97
16QAM	16	0	20.18			

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			25(105)	
Author Data	Dates of Test	Test Report No	FCC ID:		IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

1860	18700	5 MHz	16QAM	50	0	19.91
			QPSK	1	0	22.32
			QPSK	1	24	22.32
			QPSK	25	0	21.02
			16QAM	1	0	21.50
			16QAM	1	24	21.52
1860	18700	3 MHz	16QAM	25	0	19.95
			QPSK	1	0	22.41
			QPSK	1	14	22.31
			QPSK	15	0	21.14
			16QAM	1	0	21.21
			16QAM	1	14	21.08
1860	18700	1.4 MHz	16QAM	15	0	20.04
			QPSK	1	0	22.17
			QPSK	1	5	22.14
			QPSK	6	0	21.13
			16QAM	1	0	20.81
			16QAM	1	5	20.82
			16QAM	6	0	20.15


Table 1.8.4-1a RFL111LW LTE band 2 conducted power measurements

Band	LTE Band 2					
Frequency (MHz)	Channel	BW	Modulation	RB Size	RB Offset	Maximum Avg. Power (dBm)
1860	18700	20 MHz	QPSK	1	0	23.02
			QPSK	1	50	22.90
			QPSK	1	99	23.08
			QPSK	50	0	21.86
			QPSK	50	50	21.77
			QPSK	100	0	21.85
			16QAM	1	0	21.90
			16QAM	1	50	21.80
			16QAM	1	99	21.93
			16QAM	75	0	20.83
			16QAM	75	25	20.72
			16QAM	100	0	20.79
1880	18900	20 MHz	QPSK	1	0	23.16
			QPSK	1	50	23.08
			QPSK	1	99	23.23
			QPSK	50	0	21.85
			QPSK	50	50	21.98
			QPSK	100	0	21.92
			16QAM	1	0	21.82
			16QAM	1	50	21.76
			16QAM	1	99	21.96
			16QAM	75	0	20.88
			16QAM	75	25	20.86
			16QAM	100	0	20.91
1900	19100	20 MHz	QPSK	1	0	23.23
			QPSK	1	50	23.01
			QPSK	1	99	22.76
			QPSK	50	0	21.85
			QPSK	50	50	21.66
			QPSK	100	0	21.75
			16QAM	1	0	22.25
			16QAM	1	50	22.06

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		26(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	


			16QAM	1	99	21.86
			16QAM	75	0	20.80
			16QAM	75	25	20.65
			16QAM	100	0	20.79
1880	18900	15 MHz	QPSK	1	0	23.12
			QPSK	1	74	23.10
			QPSK	36	39	21.90
			QPSK	75	0	21.79
			16QAM	1	0	22.35
			16QAM	1	74	22.44
			16QAM	16	59	20.13
			16QAM	75	0	20.70
			1880	18900	10 MHz	QPSK
QPSK	1	49				23.18
QPSK	25	0				21.98
QPSK	50	0				21.82
16QAM	1	0				21.77
16QAM	1	49				21.90
16QAM	16	0				21.05
1880	18900	5 MHz	16QAM	50	0	20.87
			QPSK	1	0	23.17
			QPSK	1	24	23.14
			QPSK	25	0	21.94
			16QAM	1	0	22.41
			16QAM	1	24	22.46
1880	18900	3 MHz	16QAM	25	0	20.89
			QPSK	1	0	23.11
			QPSK	1	14	23.11
			QPSK	15	0	22.06
			16QAM	1	0	21.96
			16QAM	1	14	22.02
1880	18900	1.4 MHz	16QAM	15	0	21.05
			QPSK	1	0	23.08
			QPSK	1	5	23.05
			QPSK	6	0	22.13
			16QAM	1	0	21.94
			16QAM	1	5	21.96
			16QAM	6	0	21.05

Table 1.8.4-1b RP121LW LTE band 2 conducted power measurements

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			27(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	


Band	LTE Band 4					
Frequency (MHz)	Channel	BW	Modulation	RB Size	RB Offset	Maximum Avg. Power (dBm)
1720	20050	20 MHz	QPSK	1	0	23.60
			QPSK	1	50	23.47
			QPSK	1	99	23.46
			QPSK	50	0	22.27
			QPSK	50	50	22.20
			QPSK	100	0	22.12
			16QAM	1	0	22.20
			16QAM	1	50	22.17
			16QAM	1	99	22.05
			16QAM	75	0	21.15
			16QAM	75	25	21.24
16QAM	100	0	21.13			
1732.5	20175	20 MHz	QPSK	1	0	23.47
			QPSK	1	50	23.44
			QPSK	1	99	23.61
			QPSK	50	0	22.15
			QPSK	50	50	22.22
			QPSK	100	0	22.20
			16QAM	1	0	22.27
			16QAM	1	50	22.35
			16QAM	1	99	22.43
			16QAM	75	0	21.15
			16QAM	75	25	21.08
16QAM	100	0	21.21			
1745.0	20300	20 MHz	QPSK	1	0	23.49
			QPSK	1	50	23.52
			QPSK	1	99	23.83
			QPSK	50	0	22.35
			QPSK	50	50	22.22
			QPSK	100	0	22.30
			16QAM	1	0	22.58
			16QAM	1	50	22.61
			16QAM	1	99	22.87
			16QAM	75	0	21.28
			16QAM	75	25	21.22
16QAM	100	0	21.31			
1745.0	20300	15 MHz	QPSK	1	0	23.60
			QPSK	1	74	23.67
			QPSK	36	39	22.45
			QPSK	75	0	22.23
			16QAM	1	0	22.43
			16QAM	1	74	22.49
			16QAM	16	59	22.63
			16QAM	75	0	21.21
1745.0	20300	10 MHz	QPSK	1	0	23.71
			QPSK	1	49	23.71
			QPSK	25	0	22.44
			QPSK	50	0	22.36
			16QAM	1	0	22.49
			16QAM	1	49	22.47
			16QAM	16	0	21.67
			16QAM	50	0	21.39
			QPSK	1	0	23.85

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS
Copyright 2005-2014, BlackBerry RTS, a division of BlackBerry Limited

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 28(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	


1745.0	20300	5 MHz	QPSK	1	24	23.79
			QPSK	25	0	22.45
			16QAM	1	0	22.97
			16QAM	1	24	23.05
			16QAM	25	0	21.47
1745.0	20300	3 MHz	QPSK	1	0	23.75
			QPSK	1	14	23.80
			QPSK	15	0	22.62
			16QAM	1	0	22.50
			16QAM	1	14	22.55
1745.0	20300	1.4 MHz	16QAM	15	0	21.62
			QPSK	1	0	23.72
			QPSK	1	5	23.75
			QPSK	6	0	22.65
			16QAM	1	0	22.50
			16QAM	1	5	22.55
			16QAM	6	0	21.61

**Table 1.8.4-2 LTE band 4 conducted power measurements
with Hotspot mode disabled**


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 29(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Band	LTE Band 4					
Frequency (MHz)	Channel	BW	Modulation	RB Size	RB Offset	Maximum Avg. Power (dBm)
1720	20050	20 MHz	QPSK	1	0	22.63
			QPSK	1	50	22.60
			QPSK	1	99	22.68
			QPSK	50	0	22.18
			QPSK	50	50	22.13
			QPSK	100	0	22.17
			16QAM	1	0	22.07
			16QAM	1	50	22.05
			16QAM	1	99	22.11
			16QAM	75	0	21.12
			16QAM	75	25	21.12
16QAM	100	0	21.18			
1732.5	20175	20 MHz	QPSK	1	0	22.71
			QPSK	1	50	22.70
			QPSK	1	99	22.69
			QPSK	50	0	22.06
			QPSK	50	50	22.05
			QPSK	100	0	22.02
			16QAM	1	0	22.30
			16QAM	1	50	22.22
			16QAM	1	99	22.15
			16QAM	75	0	21.12
			16QAM	75	25	21.03
16QAM	100	0	21.00			
1745.0	20300	20 MHz	QPSK	1	0	22.60
			QPSK	1	50	22.60
			QPSK	1	99	22.87
			QPSK	50	0	22.00
			QPSK	50	50	22.11
			QPSK	100	0	22.08
			16QAM	1	0	21.82
			16QAM	1	50	21.91
			16QAM	1	99	22.20
			16QAM	75	0	20.90
			16QAM	75	25	21.02
16QAM	100	0	21.09			

**Table 1.8.4-3 LTE band 4 conducted power measurements
with Hot Spot mode enabled**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 30(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Band	LTE Band 5					
Frequency (MHz)	Channel	BW	Modulation	RB Size	RB Offset	Maximum Avg. Power (dBm)
829	20450	10 MHz	QPSK	1	0	23.74
			QPSK	1	25	23.72
			QPSK	1	49	23.65
			QPSK	25	0	23.67
			QPSK	25	25	22.69
			QPSK	50	0	22.52
			16QAM	1	0	22.44
			16QAM	1	25	22.42
			16QAM	1	49	22.36
			16QAM	30	0	21.74
16QAM	30	20	21.63			
16QAM	50	0	21.67			
836.5	20525	10 MHz	QPSK	1	0	23.78
			QPSK	1	25	23.75
			QPSK	1	49	23.65
			QPSK	25	0	22.59
			QPSK	25	25	22.58
			QPSK	50	0	22.51
			16QAM	1	0	22.61
			16QAM	1	25	22.65
			16QAM	1	49	22.46
			16QAM	30	0	21.75
16QAM	30	20	21.53			
16QAM	50	0	21.52			
844.0	20600	10 MHz	QPSK	1	0	23.64
			QPSK	1	25	23.61
			QPSK	1	49	23.63
			QPSK	25	0	22.57
			QPSK	25	25	22.44
			QPSK	50	0	22.40
			16QAM	1	0	22.35
			16QAM	1	25	22.23
			16QAM	1	49	22.30
			16QAM	30	0	21.51
16QAM	30	20	21.48			
16QAM	50	0	21.42			
836.5	20525	5 MHz	QPSK	1	0	23.77
			QPSK	1	24	23.74
			QPSK	15	0	22.71
			QPSK	25	0	22.57
			16QAM	1	0	23.08
			16QAM	1	24	23.00
			16QAM	15	10	22.62
16QAM	25	0	22.59			
836.5	20525	3 MHz	QPSK	1	0	23.80
			QPSK	1	14	23.74
			QPSK	6	9	22.70
			QPSK	15	0	22.62
			16QAM	1	0	22.62
			16QAM	1	8	22.66
16QAM	4	0	22.76			


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 31(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

836.5	20525	1.4 MHz	16QAM	4	11	22.85
			QPSK	1	0	23.68
			QPSK	1	5	23.70
			QPSK	6	0	22.73
			16QAM	1	0	22.50
			16QAM	1	5	22.40
			16QAM	6	0	21.70

**Table 1.8.4-4 LTE band 5 conducted power measurements
with Hot Spot mode disabled**


Band	LTE Band 5					
Frequency (MHz)	Channel	BW	Modulation	RB Size	RB Offset	Maximum Avg. Power (dBm)
829	20450	10 MHz	QPSK	1	0	21.83
			QPSK	1	25	21.65
			QPSK	1	49	21.70
			QPSK	25	0	21.68
			QPSK	25	25	21.59
			QPSK	50	0	21.62
			16QAM	1	0	21.60
			16QAM	1	25	21.41
			16QAM	1	49	21.45
			16QAM	30	0	21.68
			16QAM	30	20	21.72
836.5	20525	10 MHz	16QAM	50	0	21.42
			QPSK	1	0	21.85
			QPSK	1	25	21.60
			QPSK	1	49	21.65
			QPSK	25	0	21.57
			QPSK	25	25	21.58
			QPSK	50	0	21.45
			16QAM	1	0	21.57
			16QAM	1	25	21.41
			16QAM	1	49	21.50
			16QAM	30	0	21.60
844.0	20600	10 MHz	16QAM	30	20	21.47
			16QAM	50	0	21.42
			QPSK	1	0	21.97
			QPSK	1	25	21.78
			QPSK	1	49	21.74
			QPSK	25	0	21.65
			QPSK	25	25	21.61
			QPSK	50	0	21.55
			16QAM	1	0	21.55
			16QAM	1	25	21.30
			16QAM	1	49	21.43
16QAM	30	0	21.67			
16QAM	30	20	21.69			
			16QAM	50	0	21.45

**Table 1.8.4-5 LTE band 5 conducted power measurements
with Hot Spot mode enabled**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 32(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Band	LTE Band 17					
Frequency (MHz)	Channel	BW	Modulation	RB Size	RB Offset	Maximum Avg. Power (dBm)
709.0	23780	10 MHz	QPSK	1	0	23.63
			QPSK	1	25	23.55
			QPSK	1	49	23.60
			QPSK	25	0	22.50
			QPSK	25	25	22.53
			QPSK	50	0	22.41
			16QAM	1	0	22.30
			16QAM	1	25	22.21
			16QAM	1	49	22.30
			16QAM	16	0	21.73
			16QAM	16	34	21.80
16QAM	50	0	21.50			
710	23790	10 MHz	QPSK	1	0	23.66
			QPSK	1	25	23.61
			QPSK	1	49	23.70
			QPSK	25	0	22.46
			QPSK	25	25	22.51
			QPSK	50	0	22.41
			16QAM	1	0	22.55
			16QAM	1	25	22.43
			16QAM	1	49	22.42
			16QAM	16	0	21.71
			16QAM	16	34	21.70
16QAM	50	0	21.47			
711	23800	10 MHz	QPSK	1	0	23.58
			QPSK	1	25	23.61
			QPSK	1	49	23.66
			QPSK	25	0	22.52
			QPSK	25	25	22.51
			QPSK	50	0	22.40
			16QAM	1	0	22.28
			16QAM	1	25	22.31
			16QAM	1	49	22.34
			16QAM	16	0	21.66
			16QAM	16	34	21.75
16QAM	50	0	21.54			
710	23790	5 MHz	QPSK	1	0	23.70
			QPSK	1	24	23.60
			QPSK	10	15	22.64
			QPSK	25	0	22.20
			16QAM	1	0	22.70
			16QAM	1	13	22.64
			16QAM	8	17	22.66
16QAM	25	0	21.45			


**Table 1.8.4-6 LTE band 17 conducted power measurements
with Hot Spot mode enabled and disabled**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 33(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

1.8.5 SAR Evaluation Procedures for GSM/(E)GPRS Dual Transfer Mode as per KDB 941225 D04 v01 and SAR Test Reduction Procedures GSM GPRS EDGE as per DDB 941225 D03 vo1


- The device supports EGPRS/GPRS Multi-slot Class 12, DTM/GPRS Multi-slot Class11 and DTM/EGPRS Multi-slot Class10.
- CMU200 base station simulator with DTM software option CMU-K44 was used to set device in DTM (CS+PD) mode for testing. However, device could not be connected in DTM 4-slots uplink.
- For each slot addition in multi-slot modes (DTM, GPRS, EDGE), there is software power reduction of ~ 2 dB per slot.
- For head configurations, 1 slot CS, 2/3/4-slots (PD) and DTM (CS+PD) were evaluated.
- For body SAR configurations, 2/3/4-slots GPRS (PD) mode were tested.
- In EDGE/GPRS mode, GMSK Modulation was used using CS1-CS4 or MCS1-MCS4.
- 8-PSK modulation or MCS5-MCS9 code scheme were avoided since maximum burst avg . power was measured lower on those modulation schemes.
- Please refer to the conducted power measurements table below:

Mode	Freq. (MHz)	Max burst averaged conducted power (dBm) CS1	Max burst averaged conducted power (dBm) MCS1	Max burst averaged conducted power (dBm) MCS5
2-slots GPRS 850 MHz	824.2	30.4	N/A	N/A
	836.8	30.3	N/A	N/A
	848.8	30.1	N/A	N/A
3-slots GPRS 850 MHz	824.2	29.2	N/A	N/A
	836.8	29.2	N/A	N/A
	848.8	29.1	N/A	N/A
4-slots GPRS 850 MHz	824.2	27.8	N/A	N/A
	836.8	27.5	N/A	N/A
	848.8	27.5	N/A	N/A
2-slots EDGE 850 MHz	824.2	30.5	30.5	27.5
	836.8	30.4	30.4	27.4
	848.8	30.2	30.2	27.3
2-slots DTM 850 MHz	824.2	30.2	30.2	30.2
	836.8	30.1	30.1	30.1
	848.8	29.9	29.9	29.9
3-slots EDGE 850 MHz	824.2	29.1	29.0	25.8
	836.8	29.1	29.0	25.8
	848.8	28.9	28.8	25.7
3-slots DTM 850 MHz	824.2	28.8	28.8	28.8
	836.8	28.7	28.7	28.7
	848.8	28.6	28.6	28.6
4-slots EDGE 850 MHz	824.2	27.6	27.7	24.7
	836.8	27.4	27.5	24.6
	848.8	27.4	27.5	24.5

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			34(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

2-slots GPRS 1900 MHz	1850.2	28.6	N/A	N/A
	1880.0	28.4	N/A	N/A
	1909.8	28.5	N/A	N/A
3-slots GPRS 1900 MHz	1850.2	26.0	N/A	N/A
	1880.0	25.8	N/A	N/A
	1909.8	25.8	N/A	N/A
4-slots GPRS 1900 MHz	1850.2	25.3	N/A	N/A
	1880.0	25.2	N/A	N/A
	1909.8	25.1	N/A	N/A
2-slots EDGE 1900MHz	1850.2	28.6	28.5	25.5
	1880.0	28.6	28.6	25.5
	1909.8	28.6	28.5	25.5
2-slots DTM 1900MHz	1850.2	28.6	28.5	28.5
	1880.0	28.3	28.3	28.3
	1909.8	28.4	28.3	28.3
3-slots EDGE 1900MHz	1850.2	26.0	25.9	24.4
	1880.0	26.1	26.1	24.4
	1909.8	25.9	25.9	24.3
3-slots DTM 1900MHz	1850.2	25.9	25.9	25.9
	1880.0	25.8	25.8	25.8
	1909.8	25.7	25.7	25.8
4-slots EDGE 1900MHz	1850.2	25.4	25.4	23.3
	1880.0	25.2	25.2	23.2
	1909.8	25.1	25.1	23.1
Mode		Freq. (MHz)		Max burst averaged conducted power (dBm)
1-slot GSM (CS) 850 MHz		824.2		33.9
		836.8		33.9
		848.8		33.6
1-slot GSM (CS) 1900 MHz		1850.2		30.1
		1880.0		30.0
		1909.8		30.1

**1.8.5-1 Rev 2 GSM/EDGE/GPRS channel vs. conducted power
with Hotspot mode enabled and disabled (Rev2-00)**


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 35(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Mode	Freq. (MHz)	Max burst averaged conducted power (dBm) CS1	Max burst averaged conducted power (dBm) MCS1	Max burst averaged conducted power (dBm) MCS5
2-slots GPRS 1900 MHz	1850.2	28.4	N/A	N/A
	1880.0	28.5	N/A	N/A
	1909.8	28.4	N/A	N/A
Mode	Freq. (MHz)	Max burst averaged conducted power (dBm)		
1-slot GSM (CS) 1900 MHz	1850.2	28.9		
	1880.0	29.1		
	1909.8	28.8		

**1.8.5-2 GSM/EDGE/GPRS channel vs. conducted power
with Hotspot mode enabled and disabled (Rev3-01)**


Mode	Freq. (MHz)	Max burst averaged conducted power (dBm) CS1	Max burst averaged conducted power (dBm) MCS1	Max burst averaged conducted power (dBm) MCS5
2-slots GPRS 850 MHz	824.2	27.1	N/A	N/A
	836.8	27.2	N/A	N/A
	848.8	26.7	N/A	N/A
3-slots GPRS 850 MHz	824.2	25.5	N/A	N/A
	836.8	25.2	N/A	N/A
	848.8	25.1	N/A	N/A
4-slots GPRS 850 MHz	824.2	24.1	N/A	N/A
	836.8	24.1	N/A	N/A
	848.8	23.9	N/A	N/A
2-slots EDGE 850 MHz	128	27.1		
	190	27.2		
	251	26.7		
Mode	Freq. (MHz)	Max burst averaged conducted power (dBm)		
1-slot GSM (CS) 850 MHz	824.2	30.1		
	836.8	30.0		
	848.8	29.9		

**1.8.5-3 GSM/EDGE/GPRS channel vs. conducted power
with Hotspot mode enabled (Rev3-01)**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 36(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

1.8.6 SAR Measurement Procedure for Fast SAR Scan as per KDB 447498

- Area scan based 1-g SAR estimation.
 - Very specific implementation of fast SAR methods.
 - Reported in the 29th BEMS meeting in 2009.
 - Using the specific polynomial fit algorithm.
 - Other implementations are not considered.
- When estimated 1-g SAR is ≤ 1.2 W/kg, zoom scan is not required according to the following:
 - Zoom scan is not required for any other purposes.
 - Peaks are distinctively identified in the area scan.
 - No sharp gradients: SAR at 1 cm from peak $\geq 40\%$ of peak value.
 - No measurement warnings or alerts for other measurement issues.
- 1-g SAR for estimated & zoom scan in the system verification (dipole) must be within 3% of each other to utilize Fast SAR.
- 1g Fast SAR values for dipole validation scans are generally more conservative than the standard SAR scans.
- Regardless of the SAR value, a zoom scan is required for the highest SAR configuration in each frequency band and wireless mode.
- Fast SAR Algorithm: The approach is based on the area scan using DASYS system.

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		37(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW

1.8.7 SAR Measurement Procedures for 3G Devices

WCDMA Handsets

Output Power Verification

- Maximum output power is verified on the High, Middle and Low channels using 12.2 kbps RMC, 12.2 kbps AMR with a 3.4 kbps SRB (signal radio bearer) with TPC (transmit power control) set to all “1’s” for WCDMA/HSPA or applying the required inner loop.
- For Release 6 HSPA/Release 7 HSDPA⁺, output power is measured according to requirements for HS-DPCCH Sub-test 1-4/1-5 and 3GPP TS 34.121.

Head SAR Measurements


SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

Body SAR Measurements


SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. SAR for other spreading codes and multiple DPDCH_n, when supported by the DUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH_n configuration, are less than ¼ dB higher than those measured in 12.2 RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH_n using the exposure configuration that results in the highest SAR with 12.2 RMC.

Handsets with HSPA

Body SAR is not required for handsets with HSPA/HSPA+ capabilities, when the maximum average output of each RF channel with HSPA active is less than ¼ dB higher than that measured in 12.2 kbps RMC without HSPA/HSPA+. Otherwise, SAR for HSPA is measured using FRC (fixed reference channel) in the body exposure configuration that results in the highest SAR for that RF channel in 12.2kbps RMC.

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			38(105)
Author Data	Dates of Test	Test Report No	FCC ID:		IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW

	Band	FDD V (850)		
	Channel	4132	4182	4233
	Freq (MHz)	826.4	836.4	846.6
Mode	Subtest	Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	24.71	24.44	24.35
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	24.68	24.46	24.37
Rel6 HSUPA	1	23.66	23.33	23.26
Rel6 HSUPA	2	23.35	23.11	23.16
Rel6 HSUPA	3	23.15	22.93	22.97
Rel6 HSUPA	4	23.51	23.11	23.18
Rel6 HSUPA	5	21.43	21.10	21.13
Rel7 HSDPA+	1	23.26	23.11	22.80
Rel7 HSDPA+	2	22.20	22.03	22.13
Rel7 HSDPA+	3	22.92	22.83	22.77
Rel7 HSDPA+	4	21.40	21.10	21.30
	Band	FDD II (1900)		
	Channel	9262	9400	9538
	Freq (MHz)	1852.4	1880.0	1907.6
Mode	Subtest	Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	22.83	22.82	22.76
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	22.92	22.80	22.80
Rel6 HSUPA	1	22.84	22.92	22.87
Rel6 HSUPA	2	22.85	22.80	22.85
Rel6 HSUPA	3	22.44	22.41	22.36
Rel6 HSUPA	4	22.94	22.67	22.72
Rel6 HSUPA	5	20.51	20.52	20.44
Rel7 HSDPA+	1	22.70	22.77	22.85
Rel7 HSDPA+	2	22.04	22.14	22.10
Rel7 HSDPA+	3	22.04	22.03	21.95
Rel7 HSDPA+	4	21.55	21.33	21.41
	Band	FDD IV (1700)		
	Channel	1312	1413	1513
	Freq (MHz)	1712.4	1732.6	1752.6
Mode	Subtest	Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	22.45	22.30	22.58
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	22.38	22.28	22.52
Rel6 HSUPA	1	21.82	21.80	22.03
Rel6 HSUPA	2	21.70	21.62	21.78
Rel6 HSUPA	3	22.41	22.31	22.49
Rel6 HSUPA	4	22.31	22.18	22.48


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 39(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Rel6 HSUPA	5	21.43	21.32	21.65
Rel7 HSDPA+	1	22.50	22.40	22.61
Rel7 HSDPA+	2	21.90	21.95	22.05
Rel7 HSDPA+	3	21.55	21.37	21.38
Rel7 HSDPA+	4	21.20	21.25	21.30

Table 1.8.7-1 WCDMA (Rel99) / HSPA/HSPA+ conducted power measurements with Mobile Hot Spot mode disabled

	Band	FDD V (850)		
	Channel	4132	4182	4233
	Freq (MHz)	826.4	836.4	846.6
Mode	Subtest	Max burst averaged conducted power (dBm)		
Rel99	12.2 kbps RMC	22.81	22.60	22.50
Rel99	12.2 kbps, Voice, AMR, SRB 3.4 kbps	22.78	22.65	22.65
Rel6 HSUPA	1	21.70	21.64	21.51
Rel6 HSUPA	2			
Rel6 HSUPA	3			
Rel6 HSUPA	4			
Rel6 HSUPA	5			
Rel7 HSDPA+	1			
Rel7 HSDPA+	2			
Rel7 HSDPA+	3			
Rel7 HSDPA+	4			

Table 1.8.7-2 WCDMA (Rel99) / HSPA/HSPA+ conducted power measurements with Mobile Hot Spot mode enabled

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 40(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

1.9 General SAR Test Reduction and Exclusion procedure as per KDB 447498 D01 V05 and SAR Handsets Multi Xmitter and Ant procedure as per 648474 D04 v01

Standalone SAR test exclusion guidance:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*

$$\left(\frac{\text{max. power of channel, including tune - up tolerance (mW)}}{\text{min. test separation distance (mm)}} \times \sqrt{f \text{ (GHz)}} \right) \leq 3.0, \text{ For 1g SAR}$$

Where:

- $f_{\text{(GHz)}}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- If *distance* is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
- The result is rounded to one decimal place for comparison

Simultaneous Transmission SAR Test exclusion considerations:

When the sum of 1-g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. When the sum is greater than the SAR limit, the SAR to peak location separation ratio procedures described below may be applied to determine if simultaneous transmission SAR test exclusion applies.

The ratio is determined by:


$$\left([SAR1 + SAR2] \frac{1.5}{R_i} \right) \leq 0.04$$

Where:

- R_i = the separation distance between the peak SAR locations for the antenna pair (mm)

Simultaneous Transmission SAR required:

- antenna pairs with SAR to antenna separation ratio > 0.04; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 41(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

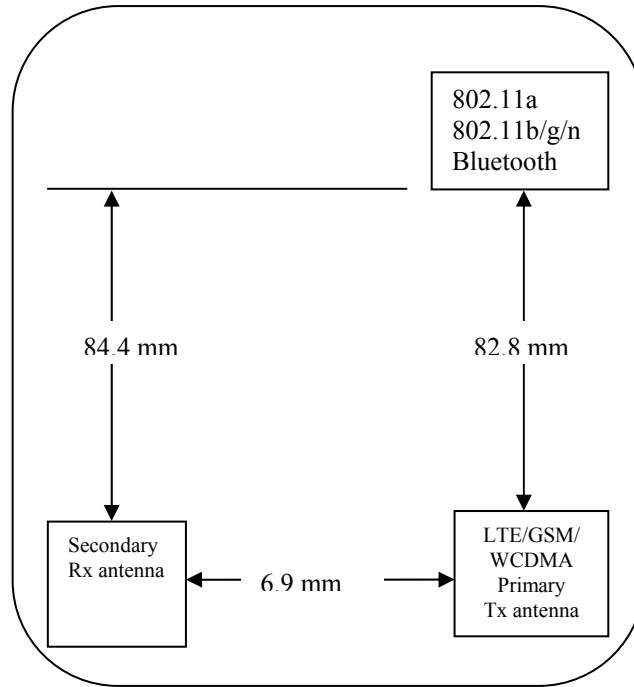


Figure 1.9-1 Back view of device showing closest distance between antenna pairs


1.9.1 Simultaneous Transmission Analysis

Simultaneous Transmission Combination	Head	Body-Worn Accessory	Mobile Hotspot
WCDMA/GSM voice + WiFi 2.4 GHz	Yes	Yes	No
WCDMA/GSM voice + WiFi 5.0 GHz	Yes	Yes	No
WCDMA/GSM voice + BT	Yes	Yes	No
LTE/HSPA/EDGE/GPRS data + WiFi 2.4 GHz	Yes	Yes	Yes
LTE/HSPA/EDGE/GPRS data + WiFi 5.0 GHz	Yes	Yes	Yes
LTE/HSPA/EDGE/GPRS data + BT	Yes	Yes	No

Table 1.9.1-1 Simultaneous Transmission Scenarios

Note 1: BT and WiFi cannot transmit simultaneously since the design doesn't allow it and they use the same antenna.

Note 2: GSM/UMTS and LTE cannot transmit simultaneously since they share the same antenna.


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 42(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Test	Configuration	Licensed Transmitters		WiFi 2.4/5.0G 1 g avg. SAR (W/kg)	Maximum Summation 1 g avg. SAR (W/kg)
		Band	1 g avg. SAR (W/kg)		
Head SAR	Right Cheek	LTE Band 17	0.45	0.33	0.78
	Right Cheek	LTE Band 5	0.54		0.87
	Right Cheek	GSM/GPRS/EDGE 850	0.66		0.99
	Right Cheek	UMTS Band V	0.63		0.96
	Right Cheek	LTE Band 4	0.75		1.08
	Right Cheek	UMTS Band IV	0.53		0.86
	Right Cheek	LTE Band 2	0.49		0.82
	Right Cheek	GSM/GPRS/EDGE 1900	0.48		0.81
	Right Cheek	UMTS Band II	0.59		0.92
	Right Tilt	LTE Band 17	0.26	0.39	0.65
	Right Tilt	LTE Band 5	0.33		0.72
	Right Tilt	GSM/GPRS/EDGE 850	0.37		0.76
	Right Tilt	UMTS Band V	0.39		0.78
	Right Tilt	LTE Band 4	0.65		1.04
	Right Tilt	UMTS Band IV	0.40		0.79
	Right Tilt	LTE Band 2	0.43		0.82
	Right Tilt	GSM/GPRS/EDGE 1900	0.42		0.81
	Right Tilt	UMTS Band II	0.50		0.89
	Left Cheek	LTE Band 17	0.59	0.22	0.81
	Left Cheek	LTE Band 5	0.75		0.97
	Left Cheek	GSM/GPRS/EDGE 850	0.94		1.16
	Left Cheek	UMTS Band V	1.03		1.25
	Left Cheek	LTE Band 4	1.37		1.59
	Left Cheek	UMTS Band IV	1.29		1.51
	Left Cheek	LTE Band 2	1.04		1.26
	Left Cheek	GSM/GPRS/EDGE 1900	1.01		1.23
	Left Cheek	UMTS Band II	1.12		1.34
	Left Tilt	LTE Band 17	0.27	0.29	0.56
	Left Tilt	LTE Band 5	0.33		0.62
	Left Tilt	GSM/GPRS/EDGE 850	0.40		0.69
	Left Tilt	UMTS Band V	0.39		0.68
	Left Tilt	LTE Band 4	0.58		0.87
	Left Tilt	UMTS Band IV	0.38		0.67
	Left Tilt	LTE Band 2	0.42		0.71
	Left Tilt	GSM/GPRS/EDGE 1900	0.41		0.70
	Left Tilt	UMTS Band II	0.50		0.79

Table 1.9.1-2 Highest Head SAR values and summation

Note 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.

Note 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3	Page 43(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW IC 2503A-RFL110LW 2503A-RFP120LW

Test	Configuration	Licensed Transmitters		WiFi 2.4/5.0G 1 g avg. SAR (W/kg)	Maximum Summation 1 g avg. SAR (W/kg)
		Band	1 g avg. SAR (W/kg)		
Body Worn SAR	15 mm separation, device back	LTE Band 17	0.46	0.31	0.77
		LTE Band 5	0.63		0.94
		GSM/GPRS/EDGE 850	0.58		0.89
		UMTS Band V	0.75		1.06
		LTE Band 4	0.71		1.02
		UMTS Band IV	0.54		0.85
		LTE Band 2	0.58		0.89
		GSM/GPRS/EDGE 1900	0.62		0.93
	UMTS Band II	0.65	0.96		
	Holster device back	LTE Band 17	0.33	0.25	0.58
		LTE Band 5	0.52		0.77
		GSM/GPRS/EDGE 850	0.51		0.76
		UMTS Band V	0.62		0.87
		LTE Band 4	0.32		0.57
		UMTS Band IV	0.35		0.60
		LTE Band 2	0.38		0.63
		GSM/GPRS/EDGE 1900	0.37		0.62
	UMTS Band II	0.44	0.69		
	Holster device front	LTE Band 17	0.27	0.05	0.32
		LTE Band 5	0.48		0.53
		GSM/GPRS/EDGE 850	0.49		0.54
		UMTS Band V	0.58		0.63
		LTE Band 4	0.24		0.29
		UMTS Band IV	0.27		0.32
LTE Band 2		0.23	0.28		
GSM/GPRS/EDGE 1900		0.23	0.28		
UMTS Band II	0.28	0.33			


Table 1.9.1-3 Highest Body-worn SAR values for the same configuration

Note 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.

Note 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters is required.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3	Page 44(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW
			IC 2503A-RFL110LW 2503A-RFP120LW

Test	Configuration	Licensed Transmitters		WiFi 2.4 G 1 g avg. SAR (W/kg)	Maximum Summation 1 g avg. SAR (W/kg)
		Band	1 g avg. SAR (W/kg)		
Mobile Hotspot SAR	10 mm separation, device back	LTE Band 17	0.77	0.68	1.45
		LTE Band 5	0.50		1.18
		GSM/GPRS/EDGE 850	0.88		1.56
		UMTS Band V	0.62		1.30
		LTE Band 4	1.05		1.73
		UMTS Band IV	1.08		1.76
		LTE Band 2	1.15		1.83
		GSM/GPRS/EDGE 1900	1.21		1.89
	UMTS Band II	1.36	2.04		
	10 mm separation, device front	LTE Band 17	0.51	0.11	0.62
		LTE Band 5	0.40		0.51
		GSM/GPRS/EDGE 850	0.37		0.48
		UMTS Band V	0.52		0.63
		LTE Band 4	0.57		0.68
		UMTS Band IV	0.60		0.71
		LTE Band 2	0.61		0.72
		GSM/GPRS/EDGE 1900	0.64		0.75
	UMTS Band II	0.70	0.81		
	10 mm separation, device left	LTE Band 17	0.34	0.20	0.54
		LTE Band 5	0.43		0.63
		GSM/GPRS/EDGE 850	0.41		0.61
		UMTS Band V	0.55		0.75
		LTE Band 4	0.31		0.51
		UMTS Band IV	0.37		0.57
		LTE Band 2	0.34		0.54
		GSM/GPRS/EDGE 1900	0.32		0.52
	UMTS Band II	0.34	0.54		
	10 mm separation, device right	LTE Band 17	0.15	0.08	0.23
		LTE Band 5	0.19		0.27
		GSM/GPRS/EDGE 850	0.21		0.29
		UMTS Band V	0.25		0.33
		LTE Band 4	0.16		0.24
		UMTS Band IV	0.10		0.18
		LTE Band 2	0.15		0.23
		GSM/GPRS/EDGE 1900	0.13		0.21
	UMTS Band II	0.15	0.23		
10 mm separation, device bottom	LTE Band 17	0.11	0.00	0.11	
	LTE Band 5	0.04		0.04	
	GSM/GPRS/EDGE 850	0.06		0.06	
	UMTS Band V	0.05		0.05	

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 45(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	


10 mm separation, device top	LTE Band 4	0.52	0.22	0.52
	UMTS Band IV	0.62		0.62
	LTE Band 2	0.79		0.79
	GSM/GPRS/EDGE 1900	0.75		0.75
	UMTS Band II	0.74		0.74
	LTE Band 17	0.00	0.22	0.22
	LTE Band 5	0.00		0.22
	GSM/GPRS/EDGE 850	0.00		0.22
	UMTS Band V	0.00		0.22
	LTE Band 4	0.00		0.22
	UMTS Band IV	0.00		0.22
	LTE Band 2	0.00		0.22
	GSM/GPRS/EDGE 1900	0.00		0.22
	UMTS Band II	0.00		0.22

Table 1.9.1-4 Highest Mobile Hotspot SAR values for the same configuration

Note 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.


Note 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.

Test	Configuration	Licensed Transmitters		WiFi 5 G 1 g avg. SAR (W/kg)	Maximum Summation 1 g avg. SAR (W/kg)
		Band	1 g avg. SAR (W/kg)		
Mobile Hotspot SAR	10 mm separation, device back	LTE Band 17	0.77	0.58	1.35
		LTE Band 5	0.50		1.08
		GSM/GPRS/EDGE 850	0.45		1.03
		UMTS Band V	0.62		1.20
		LTE Band 4	1.04		1.62
		UMTS Band IV	1.08		1.66
		LTE Band 2	1.15		1.73
		GSM/GPRS/EDGE 1900	1.21		1.79
		UMTS Band II	1.36		1.94
	10 mm separation, device front	LTE Band 17	0.51	0.02	0.53
		LTE Band 5	0.40		0.42
		GSM/GPRS/EDGE 850	0.37		0.37
		UMTS Band V	0.52		0.52
		LTE Band 4	0.57		0.57
		UMTS Band IV	0.60		0.62
		LTE Band 2	0.61		0.61
		GSM/GPRS/EDGE 1900	0.64		0.64
		UMTS Band II	0.70		0.70
	10 mm separation,	LTE Band 17	0.34	0.06	0.40
		LTE Band 5	0.43		0.49

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 46(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

	device left	GSM/GPRS/EDGE 850	0.41		0.47
		UMTS Band V	0.55		0.61
		LTE Band 4	0.31		0.37
		UMTS Band IV	0.37		0.43
		LTE Band 2	0.34		0.40
		GSM/GPRS/EDGE 1900	0.32		0.33
		UMTS Band II	0.34		0.40
	10 mm separation, device right	LTE Band 17	0.15	0.00	0.15
		LTE Band 5	0.19		0.19
		GSM/GPRS/EDGE 850	0.21		0.21
		UMTS Band V	0.25		0.25
		LTE Band 4	0.16		0.16
		UMTS Band IV	0.10		0.10
		LTE Band 2	0.15		0.15
		GSM/GPRS/EDGE 1900	0.13		0.13
	10 mm separation, device bottom	LTE Band 17	0.11	0.00	0.11
		LTE Band 5	0.04		0.04
		GSM/GPRS/EDGE 850	0.06		0.06
		UMTS Band V	0.05		0.05
		LTE Band 4	0.52		0.52
		UMTS Band IV	0.62		0.62
		LTE Band 2	0.79		0.79
		GSM/GPRS/EDGE 1900	0.75		0.75
	10 mm separation, device top	LTE Band 17	0.00	0.12	0.12
		LTE Band 5	0.00		0.12
		GSM/GPRS/EDGE 850	0.00		0.12
		UMTS Band V	0.00		0.12
		LTE Band 4	0.00		0.12
UMTS Band IV		0.00	0.12		
LTE Band 2		0.00	0.12		
GSM/GPRS/EDGE 1900		0.00	0.12		
UMTS Band II	0.00	0.12			

Table 1.9.1-4a Highest Mobile Hotspot SAR values for the same configuration


	Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 47(105)
	Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, device back	0.68	-33.2	-45.6	-208.0	
Antenna 2 (UMTS band IV)	MHS 10mm, device back	1.08	-41.0	48.5	-207.7	
	SAR Sum	1.76				
	SAR Sum to the power of 1.5	2.33				
	Delta [mm]		7.8	-94.1	-0.3	
	closest Distance [mm]					94.42
	Ratio	0.02				

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, device back	0.68	-33.2	-45.6	-208.0	
Antenna 2 (LTE Band 4)	MHS 10mm, device back	1.05	-36.5	42.5	-209.0	
	SAR Sum	1.73				
	SAR Sum to the power of 1.5	2.28				
	Delta [mm]		3.3	-88.1	1.0	
	closest Distance [mm]					88.18
	Ratio	0.03				

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, device back	0.68	-33.2	-45.6	-208.0	
Antenna 2 (GPRS 1900 2slots)	MHS 10mm, device back	1.21	-29.0	52.0	-208.2	
	SAR Sum	1.89				
	SAR Sum to the power of 1.5	2.60				
	Delta [mm]		-4.2	-97.6	0.2	
	closest Distance [mm]					97.70
	Ratio	0.03				

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, device back	0.68	-33.2	-45.6	-208.0	
Antenna 2 (LTE Band 2)	MHS 10mm, device back	1.15	-30.5	52.0	-208.0	
	SAR Sum	1.83				
	SAR Sum to the power of 1.5	2.48				
	Delta [mm]		-2.7	-97.6	0.0	
	closest Distance [mm]					97.65
	Ratio	0.03				


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 48(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, device back	0.68	-33.2	-45.6	-208.0	
Antenna 2 (UMTS Band II)	MHS 10mm, device back	1.36	-29.0	45.5	-207.6	
	SAR Sum	2.04				
	SAR Sum to the power of 1.5	2.91				
	Delta [mm]		-4.2	-91.1	-0.4	
	closest Distance [mm]					91.21
	Ratio	0.03				

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, device back	0.68	-39.17	-50.01	-208	
Antenna 2 (UMTS band IV)	MHS 10mm, device back	1.08	-41.0	48.5	-207.7	
	SAR Sum	1.76				
	SAR Sum to the power of 1.5	2.33				
	Delta [mm]		1.8	-98.5	-0.3	
	closest Distance [mm]					98.52
	Ratio	0.02				

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, back, 2100mA	0.68	-39.17	-50.01	-208	
Antenna 2 (LTE Band 4)	MHS 10mm, device back	1.05	-36.5	42.5	-209.0	
	SAR Sum	1.73				
	SAR Sum to the power of 1.5	2.28				
	Delta [mm]		-2.7	-92.5	1.0	
	closest Distance [mm]					92.55
	Ratio	0.02				

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, back, 2100mA	0.68	-39.17	-50.01	-208	
Antenna 2 (GPRS 1900 2slots)	MHS 10mm, device back	1.21	-29.0	52.0	-208.2	
	SAR Sum	1.89				
	SAR Sum to the power of 1.5	2.60				
	Delta [mm]		-10.2	-102.0	0.2	
	closest Distance [mm]					102.52
	Ratio	0.03				


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 49(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, back, 2100mA	0.68	-39.17	-50.01	-208	
Antenna 2 (LTE Band 2)	MHS 10mm, device back	1.15	-30.5	52.0	-208.0	
	SAR Sum	1.83				
	SAR Sum to the power of 1.5	2.48				
	Delta [mm]		-8.7	-102.0	0.0	
	closest Distance [mm]					102.38
	Ratio	0.02				


Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 b)	MHS 10mm, back, 2100mA	0.68	-39.17	-50.01	-208	
Antenna 2 (UMTS Band II)	MHS 10mm, device back	1.36	-29.0	45.5	-207.6	
	SAR Sum	2.04				
	SAR Sum to the power of 1.5	2.91				
	Delta [mm]		-10.2	-95.5	-0.4	
	closest Distance [mm]					96.05
	Ratio	0.03				

Table 1.9.1-5 Mobile Hotspot configuration ratio of SAR to peak separation distance for pair of transmitters

Note 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.


		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			50(105)
Author Data	Dates of Test	Test Report No	FCC ID:		IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW

Antenna	Position	Highest 1 g SAR SAR Zoom 1g	Hotspot Coordinates mm (x, y, z)			
			X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 a)	MHS 10mm, device back	0.58	-36.0	-53.0	-208.1	
Antenna 2 (LTE Band 4)	MHS 10mm, device back	1.05	-36.5	42.5	-209.0	
	SAR Sum	1.63				
	SAR Sum to the power of 1.5	2.08				
	Delta [mm]		0.5	-95.5	0.9	
	closest Distance [mm]					95.51
	Ratio	0.02				
Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 a)	MHS 10mm, device back	0.58	-36.0	-53.0	-208.1	
Antenna 2 (UMTS band IV)	MHS 10mm, device back	1.08	-41.0	48.5	-207.7	
	SAR Sum	1.66				
	SAR Sum to the power of 1.5	2.14				
	Delta [mm]		5.0	-101.5	-0.4	
	closest Distance [mm]					101.63
	Ratio	0.02				
Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 a)	MHS 10mm, device back	0.58	-36.0	-53.0	-208.1	
Antenna 2 (GPRS 1900)	MHS 10mm, device back	1.21	-29.0	52.0	-208.2	
	SAR Sum	1.79				
	SAR Sum to the power of 1.5	2.39				
	Delta [mm]		-7.0	-105.0	0.1	
	closest Distance [mm]					105.23
	Ratio	0.02				
Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 a)	MHS 10mm, device back	0.58	-36.0	-53.0	-208.1	
Antenna 2 (LTE Band 2)	MHS 10mm, device back	1.15	-30.5	52.0	-208.0	
	SAR Sum	1.73				
	SAR Sum to the power of 1.5	2.28				
	Delta [mm]		-5.5	-105.0	-0.1	
	closest Distance [mm]					105.14
	Ratio	0.02				

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 51(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Antenna	Position	SAR Zoom 1g	X [mm]	Y [mm]	Z [mm]	
Antenna 1 (802.11 a)	MHS 10mm, device back	0.58	-36.0	-53.0	-208.1	
Antenna 2 (UMTS Band II)	MHS 10mm, device back	1.36	-29.0	45.5	-207.6	
	SAR Sum	1.94				
	SAR Sum to the power of 1.5	2.70				
	Delta [mm]		-7.0	-98.5	-0.5	
	closest Distance [mm]					98.75
	Ratio	0.03				

Table 1.9.1-5a Mobile Hotspot configuration ratio of SAR to peak separation distance for pair of transmitters

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		52(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

2.0 DESCRIPTION OF THE TEST EQUIPMENT

2.1 SAR measurement system

SAR measurements were performed using a Dosimetric Assessment System (DASY52), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY 52 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module that performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector that is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
- The functions of the PC plug-in card based on a DSP are to perform the time critical tasks such as signal filtering, surveillance of the robot operation fast movement interrupts.
- A computer operating Windows.
- DASY52 software version 52.8.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM Twin Phantom enabling testing left-hand and right-hand usage.
- The device holder for mobile phones.
- Tissue simulating liquid mixed according to the given recipes (see section 6.1).
- System validation dipoles allowing for the validation of proper functioning of the system.

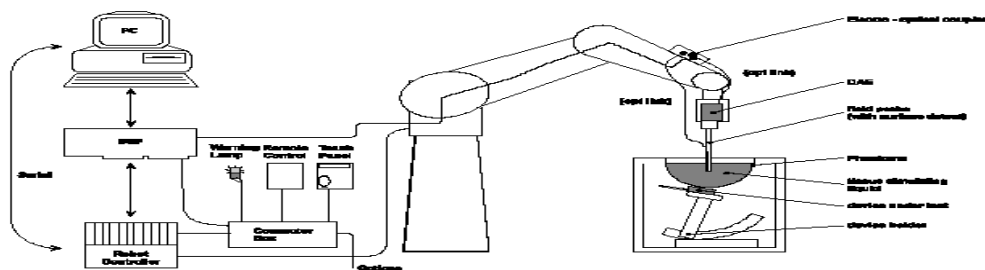



Figure 2.1-1 System Description

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 53(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

2.1.1 Equipment List

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	E-field probe	ES3DV3	3225	01/10/2014
SCHMID & Partner Engineering AG	E-field probe	EX3DV4	3592	11/14/2013
SCHMID & Partner Engineering AG	E-field probe	ET3DV6	1644	11/13/2013
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3 V1	473	01/15/2014
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3 V1	472	03/07/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D750V3	1021	01/07/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D835V2	446	01/07/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D835V2	4d043	04/07/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1800V2	2d020	01/09/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1900V2	545	01/09/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1900V2	5d075	04/05/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D2450V2	747	11/09/2013
SCHMID & Partner Engineering AG	Dipole Validation Kit	D5000V2	1033	11/15/2013
Agilent Technologies	Signal generator	8648C	4037U03155	09/23/2013
Agilent Technologies	Power meter	E4419B	GB40202821	09/23/2013
Agilent Technologies	Power sensor	8481A	MY41095417	09/26/2013
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
Agilent Technologies	Power meter	N1911A	MY45100905	05/17/2013
Agilent Technologies	Power sensor	N1921A	SG45240281	06/12/2013
Agilent Technologies	Power sensor	N1921A	MY45241383	09/11/2013
Weinschel Corp	20dB Attenuator	33-20-34	BMO697	CNR
Agilent Technologies	Network analyzer	8753ES	US39174857	09/20/2013
Rohde & Schwarz	Base Station Simulator	CMU 200	109747	11/19/2013
CPI Wireless Solutions	Amplifier	VZC-6961K4	SK4310E5	CNR
Rohde & Schwarz	Signal generator	SMA 100A	102106	12/02/2013
Rohde & Schwarz	Wideband Base Station Simulator	CMW 500	109949	12/10/2014
Rohde & Schwarz	Wideband Base Station Simulator	CMW 500	101169	12/10/2014


		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		54(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

Table 2.1.1-1a Equipment list

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
Agilent Technologies	Power meter	N1911A	MY45100905	05/29/2015
Agilent Technologies	Power sensor	N1921A	SG45240281	12/04/2014

Table 2.1.1-1b Equipment list for Wi-Fi Direct/GO additional testing

Note: This is the only equipment used to test conducted power on Wi-Fi Direct/GO

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	E-field probe	EX3DV4	3592	11/10/2015
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3	472	03/18/2015
SCHMID & Partner Engineering AG	Dipole Validation Kit	D5000V2	1033	11/08/2015
Agilent Technologies	Signal generator	8648C	4037U03155	09/25/2015
Agilent Technologies	Power meter	E4419B	GB40202821	09/25/2015
Agilent Technologies	Power sensor	8481A	MY41095233	10/06/2015
Agilent Technologies	Power sensor	8481A	MY41095417	10/06/2015
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
Rohde & Schwarz	Signal generator	SMA 100A	101540	11/28/2015
Amplifier Research	Coupler	DC7144	300993	CNR
CPI Wireless Solutions	Amplifier	VZC-6961K4	SK4310E5	CNR
Agilent Technologies	Network analyzer	8753ES	US39174857	10/24/2015
Agilent Technologies	Power meter	N1911A	MY45100905	05/29/2015
Agilent Technologies	Power sensor	N1921A	MY45241383	09/05/2015
Weinschel Corp	20dB Attenuator	33-20-34	BMO697	CNR


Table 2.1.1-1c Equipment list for 802.11a Direct/Go and Hotspot mode

2.2 Description of the test setup

Before SAR measurements are conducted, the device and the DASY equipment are setup as follows:

2.2.1 Device and base station simulator setup

- Power up the device.
- Turn on the base station simulator and set the radio channel and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the device.

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		55(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

2.2.2 DASY setup

- Turn the computer on and log on to Windows.
- Start the DASY software by clicking on the icon located on the Windows desktop.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position
- Align the probe by clicking the ‘Align probe in light beam’ button.
- Open a file and configure the proper parameters - probe, medium, communications system etc.
- Establish a connection between the Device and the communications test instrument. Place the Device on the stand and adjust it under the phantom.
- Start SAR measurements.

3.0 ELECTRIC FIELD PROBE CALIBRATION

3.1 Probe Specifications


SAR measurements were conducted using the dosimetric probes ES3DV3/ET3DV6 and EX3DV4, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fibre for the surface detection system and built-in shielding against static discharge. The probe is sensitive to E-fields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.

Property	Data
Frequency range	30 MHz – 3 GHz
Linearity	±0.1 dB
Directivity (rotation around probe axis)	≤ ±0.2 dB
Directivity (rotation normal to probe axis)	±0.4 dB
Dynamic Range	5 mW/kg – 100 W/kg
Probe positioning repeatability	±0.2 mm
Spatial resolution	< 0.125 mm ³
Probe model EX3DV4 for 2.4 – 6 GHz	
Probe tip to sensor center	1.0 mm
Probe tip diameter is	2.5 mm
Probe calibration uncertainty	< 15 % for f = 2.45 to < 6.0 GHz
Probe calibration range	± 100 MHz

Table 3.1-1 Probe specifications

3.2 Probe calibration and measurement uncertainty

The probe had been calibrated with accuracy better than ±12% . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D and below:

	Document			Page
	SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			56(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.42	6.42	6.42	0.27	2.04	± 12.0 %
900	41.5	0.97	6.06	6.06	6.06	0.35	1.74	± 12.0 %
1810	40.0	1.40	5.23	5.23	5.23	0.73	1.21	± 12.0 %
1950	40.0	1.40	4.98	4.98	4.98	0.58	1.41	± 12.0 %
2450	39.2	1.80	4.50	4.50	4.50	0.79	1.26	± 12.0 %
2600	39.0	1.96	4.32	4.32	4.32	0.77	1.32	± 12.0 %

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.27	6.27	6.27	0.36	1.74	± 12.0 %
900	55.0	1.05	6.07	6.07	6.07	0.29	2.02	± 12.0 %
1810	53.3	1.52	4.92	4.92	4.92	0.50	1.57	± 12.0 %
1950	53.3	1.52	4.87	4.87	4.87	0.59	1.49	± 12.0 %
2450	52.7	1.95	4.30	4.30	4.30	0.68	1.16	± 12.0 %
2600	52.5	2.16	4.12	4.12	4.12	0.80	0.99	± 12.0 %

Table 3.2-1 Probe ES3DV3 SN: 3225

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.57	6.57	6.57	0.44	2.25	± 12.0 %
900	41.5	0.97	6.24	6.24	6.24	0.38	2.52	± 12.0 %
1810	40.0	1.40	5.21	5.21	5.21	0.80	2.10	± 12.0 %
1950	40.0	1.40	5.16	5.16	5.16	0.80	2.09	± 12.0 %
2450	39.2	1.80	4.60	4.60	4.60	0.65	2.00	± 12.0 %


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.30	6.30	6.30	0.33	2.61	± 12.0 %
900	55.0	1.05	6.06	6.06	6.06	0.31	2.99	± 12.0 %
1810	53.3	1.52	4.75	4.75	4.75	0.80	2.40	± 12.0 %
1950	53.3	1.52	4.75	4.75	4.75	0.80	2.28	± 12.0 %
2450	52.7	1.95	4.11	4.11	4.11	0.50	2.15	± 12.0 %

Table 3.2-2 Probe ET3DV6 SN: 1644

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz)	Validity [MHz] ^C	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth	Unc (k=2)
5200	± 50 / ± 100	36.0 ± 5%	4.66 ± 5%	4.50	4.50	4.50	0.45	1.90	± 13.1%
5500	± 50 / ± 100	35.6 ± 5%	4.96 ± 5%	4.25	4.25	4.25	0.50	1.90	± 13.1%
5800	± 50 / ± 100	35.3 ± 5%	5.27 ± 5%	3.98	3.98	3.98	0.52	1.90	± 13.1%

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			57(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^C	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
5200	± 50 / ± 100	49.0 ± 5%	5.30 ± 5%	3.95	3.95	3.95	0.52	1.95 ± 13.1%
5500	± 50 / ± 100	48.6 ± 5%	5.65 ± 5%	3.73	3.73	3.73	0.55	1.95 ± 13.1%
5800	± 50 / ± 100	48.2 ± 5%	6.00 ± 5%	3.40	3.40	3.40	0.63	1.95 ± 13.1%

Table 3.2-3 Probe EX3DV4 SN: 3592

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ^C	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
2600	± 50 / ± 100	39.0 ± 5%	1.96 ± 5%	7.08	7.08	7.08	0.23	1.34 ± 11.0%
5200	± 50 / ± 100	36.0 ± 5%	4.66 ± 5%	5.01	5.01	5.01	0.40	1.80 ± 13.1%
5500	± 50 / ± 100	35.6 ± 5%	4.96 ± 5%	4.63	4.63	4.63	0.50	1.80 ± 13.1%
5800	± 50 / ± 100	35.3 ± 5%	5.27 ± 5%	4.42	4.42	4.42	0.50	1.80 ± 13.1%

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^C	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
2600	± 50 / ± 100	52.5 ± 5%	2.16 ± 5%	7.12	7.12	7.12	0.67	0.71 ± 11.0%
5200	± 50 / ± 100	49.0 ± 5%	5.30 ± 5%	4.79	4.79	4.79	0.45	1.90 ± 13.1%
5500	± 50 / ± 100	48.6 ± 5%	5.65 ± 5%	4.29	4.29	4.29	0.50	1.90 ± 13.1%
5800	± 50 / ± 100	48.2 ± 5%	6.00 ± 5%	4.08	4.08	4.08	0.60	1.90 ± 13.1%

Table 3.2-4, Probe EX3DV4 SN: 3548

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
2600	39.0	1.96	6.80	6.80	6.80	0.36	0.93	± 12.0 %
5250	35.9	4.71	4.63	4.63	4.63	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.20	4.20	4.20	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.34	4.34	4.34	0.40	1.80	± 13.1 %


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
2600	52.5	2.16	6.84	6.84	6.84	0.78	0.62	± 12.0 %
5250	48.9	5.36	4.06	4.06	4.06	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.78	3.78	3.78	0.45	1.90	± 13.1 %
5750	48.3	5.94	3.81	3.81	3.81	0.50	1.90	± 13.1 %

Table 3.2-5 Probe EX3DV4 SN: 3592 (cal: 11/10/2014)

^C The validity of ± 100 MHz only applies for DASY v4.4 and higher.
DASY 52 has been used for measurements, therefore ± 100 MHz tolerance is valid.

Measured dielectric parameters are within +/- 5% of the probe calibration values and target values.
Expanded probe calibration uncertainty (k=2) is < 15 %

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		58(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	


4.0 SAR MEASUREMENT SYSTEM VERIFICATION

Prior to conducting SAR measurements, the system was validated using the dipole validation kit and the flat section of the SAM phantom. A power level of 1.0W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are within the allowed tolerances.

At above 1.5 – 2 GHz, dipoles maintain good return loss of -15 dB to -20 dB, therefore SAR measurements are limited to approximately +/- 100 MHz of the probe/dipole calibration frequency.

4.1 System accuracy verification for head adjacent use

f (MHz)	Limits / Measured (MM/DD/YYYY)	Scan Type	SAR 1 g/10 g (W/kg)	Dielectric Parameters		Liquid Temp. (°C)	
				ϵ_r	σ [S/m]		
750	Measured (12/14/2012)	Area/Fast Scan	7.97/5.47	42.2	0.92	22.5	
	Measured (12/14/2012)	Zoom Scan	7.98/5.20	42.2	0.92	22.5	
	Measured (12/17/2012)	Area/Fast Scan	7.98/5.47	42.1	0.91	22.0	
	Measured (12/17/2012)	Zoom Scan	7.87/5.14	42.1	0.91	22.0	
	Recommended Limits			8.36/5.45	41.9	0.89	N/A
835	Measured (12/09/2012)	Area/Fast Scan	9.44/6.40	40.1	0.89	22.5	
	Measured (12/09/2012)	Zoom Scan	9.37/6.15	40.1	0.89	22.5	
	Measured (02/04/2013)	Area/Fast Scan	9.15/6.24	40.0	0.90	22.6	
	Measured (02/04/2013)	Zoom Scan	9.20/6.05	40.0	0.90	22.6	
	Recommended Limits (Dipole: 446)			9.63/6.27	41.5	0.90	N/A
Recommended Limits (Dipole: 4d043)			9.43/6.14	41.5	0.90	N/A	
1800	Measured (12/04/2012)	Area/Fast Scan	37.2/20.2	38.7	1.43	22.8	
	Measured (12/04/2012)	Zoom Scan	36.6/19.0	38.7	1.43	22.8	
	Measured (12/06/2012)	Area/Fast Scan	38.1/20.7	40.4	1.44	22.4	
	Measured (12/06/2012)	Zoom Scan	37.4/19.5	40.4	1.44	22.4	
	Measured (01/31/2013)	Area/Fast Scan	36.8/20.1	38.2	1.47	22.3	
	Measured (01/31/2013)	Zoom Scan	35.9/19.1	38.2	1.47	22.3	
	Recommended Limits (2012)			39.2/20.5	40.0	1.40	N/A
Recommended Limits (2013)			38.5/20.3	40.0	1.40	N/A	
1900	Measured (11/22/2012)	Area/Fast Scan	38.9/20.6	38.4	1.38	22.8	
	Measured (11/22/2012)	Zoom Scan	38.5/20.1	38.4	1.38	22.8	
	Measured (11/26/2012)	Area/Fast Scan	38.8/20.5	38.9	1.36	22.6	
	Measured (11/26/2012)	Zoom Scan	38.3/20.0	38.9	1.36	22.6	
	Measured (01/24/2013)	Area/Fast Scan	38.3/20.3	38.2	1.44	22.7	
	Measured (01/24/2013)	Zoom Scan	36.9/19.6	38.2	1.44	22.7	
	Measured (01/28/2013)	Area/Fast Scan	38.2/20.4	38.3	1.38	22.9	
	Measured (01/28/2013)	Zoom Scan	36.9/19.9	38.3	1.38	22.9	
	Measured (02/15/2013)	Area/Fast Scan	37.8/20.3	38.4	1.39	22.6	
	Measured (02/15/2013)	Zoom Scan	36.9/19.8	38.4	1.39	22.6	
	Recommended Limits (Dipole: 545)			40.0/20.8	40.0	1.40	N/A
	Recommended Limits (Dipole: 5d075)			40.4/21.0	40.0	1.40	N/A


		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			59(105)	
Author Data	Dates of Test	Test Report No	FCC ID:		IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

2450	Measured (01/04/2012)	Area/Fast Scan	54.3/24.5	38.4	1.86	23.1
	Measured (01/04/2012)	Zoom Scan	55.5/25.9	38.4	1.86	23.1
	Measured (01/07/2012)	Area/Fast Scan	56.5/25.5	37.8	1.76	21.5
	Measured (01/07/2012)	Zoom Scan	54.9/25.9	37.8	1.76	21.5
	Measured (01/21/2013)	Area/Fast Scan	52.1/24.7	37.4	1.76	22.5
	Measured (01/21/2013)	Zoom Scan	50.9/24.1	37.4	1.76	22.5
	Measured (02/27/2013)	Area/Fast Scan	50.4/22.4	37.7	1.78	20.5
	Measured (02/27/2013)	Zoom Scan	49.6/23.2	37.7	1.78	20.5
Recommended Limits			54.1/25.3	39.2	1.80	N/A
5200	Measured (01/14/2013)	Zoom Scan	83.5/24.2	34.4	4.66	21.5
	Measured (02/25/2013)	Zoom Scan	77.5/22.4	34.7	4.75	21.7
	Recommended Limits			80.8/23.0	36.0	4.66
5500	Measured (01/14/2013)	Zoom Scan	93.9/26.7	34.2	5.10	21.5
	Measured (02/25/2013)	Zoom Scan	85.8/24.5	34.6	5.13	21.7
	Recommended Limits			87.3/24.7	35.6	4.96
5800	Measured (01/10/2013)	Zoom Scan	86.1/24.4	34.7	5.52	21.1
	Measured (02/25/2013)	Zoom Scan	85.8/24.4	34.0	5.45	21.7
	Recommended Limits			79.4/22.5	35.3	5.27

Table 4.1-1 System accuracy (validation for head adjacent use)

f (MHz)	Limits / Measured (MM/DD/YYYY)	Scan Type	SAR 1g/10g (W/kg)	Dielectric Parameters	
				ϵ_r	σ [S/m]
5200		Area Scan/Fast SAR	N/A		
	Measured (12/11/2014)	Zoom Scan	82.8/24.1	34.8	4.77
	Recommended Limits (Dipole: 1033)			79.4/22.6	36.0
5800		Area Scan/Fast SAR	N/A		
	Measured (12/11/2014)	Zoom Scan	86.2/24.7	34.3	5.42
	Recommended Limits (Dipole: 1033)			79.4/22.6	35.3

Table 4.1-2 System accuracy (validation for head adjacent use) for 802.11a Hotspot testing

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 60(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fibreglass shell integrated with a wooden table.

The SAM Twin Phantom is a fibreglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left side head
- Right side head
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with freestanding robots.


The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.

Liquid depth of ≥ 15 cm is maintained in the phantom for all the measurements.



Figure 5.0-1 SAM Twin Phantom

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			61(105)
Author Data	Dates of Test	Test Report No	FCC ID:		IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW

6.0 TISSUE DIELECTRIC PROPERTIES

6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids are shown in the table below.


INGREDIENT	MIXTURE 800–900MHz		MIXTURE 1800–1900MHz		MIXTURE 2450 MHz		MIXTURE 5 – 6 GHz	
	Brain %	Muscle %	Brain %	Muscle %	Brain %	Muscle %	Brain %	Muscle %
Water	40.29	65.45	55.24	69.91	55.0	68.75	64	64-78
Sugar	57.90	34.31	0	0	0	0	0	0
Salt	1.38	0.62	0.31	0.13	0	0	0	0
HEC	0.24	0	0	0	0	0	0	0
Bactericide	0.18	0.10	0	0	0	0	0	0
DGBE	0	0	44.45	29.96	40.0	31.25	0	0
Triton X-100	0	0	0	0	5.0	0	0	0
Additives and Salt	0	0	0	0	0	0	3	2-3
Emulsifiers	0	0	0	0	0	0	15	9-15
Mineral Oil	0	0	0	0	0	0	18	11-18

Table 6.1-1 Tissue simulant recipe

6.1.1 Equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A
Dell	PC using GPIB card	GX110	347	N/A
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Agilent Technologies	Network Analyzer	8753ES	US39174857	09/20/2013
Control Company	Digital Thermometer	23609-234	21352860	09/26/2013

Table 6.1.1-1 Tissue simulant preparation equipment

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		62(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date (MM/DD/YY)
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A
Dell	PC using GPIB card	GX110	347	N/A
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Agilent Technologies	Network Analyzer	8753ES	US39174857	10/24/2015
Control Company	Digital Thermometer	23609-234	21352860	09/22/2015
Control Company	Digital Thermometer	15-077-21	51129471	06/11/2015

Table 6.1.1-2 Tissue simulant preparation equipment used for 802.11a Direct/GO and Hotspot mode

6.1.2 Preparation procedure

800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

1800-2450 MHz liquid


- Fill the container with water and place it on hotplate. Begin heating and stirring.
- Add the salt, Glycol/Triton X-100. The container must be covered to prevent evaporation.
- Keep the liquid hot enough to dissolve sugar for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

6.2 Electrical parameters of the tissue simulating liquid


The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are shown in the table below.

Recommended limits are adopted from IEEE P1528-2003:


“Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, DASYS manual and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 63(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	


Band (MHz)	Tissue Type	Limits / Measured (MM/DD/YYYY)	f (MHz)	Dielectric Parameters		Liquid Temp (°C)	
				ϵ_r	σ [S/m]		
750	Head	Measured (12/14/2012)	705	42.8	0.88	22.5	
			715	42.7	0.89		
			750	42.2	0.92		
		Measured (12/17/2012)	705	42.7	0.87	22.0	
			715	42.6	0.88		
			750	42.1	0.91		
	Recommended Limits		750	41.9	0.89	N/A	
	Muscle	Measured (12/14/2012)	705	54.4	0.92	22.5	
			715	54.3	0.93		
			750	53.9	0.96		
		Measured (12/17/2012)	705	54.2	0.91	22.0	
			715	54.2	0.92		
750			53.7	0.96			
Recommended Limits		750	55.5	0.96	N/A		
835	Head	Measured (12/09/2012)	815	40.4	0.87	22.5	
			825	40.3	0.88		
			835	40.1	0.89		
			850	40.0	0.90		
			865	39.7	0.92		
		Measured (02/04/2013)	815	40.3	0.88	22.6	
			825	40.2	0.89		
			835	40.0	0.90		
			850	39.8	0.91		
			865	39.6	0.93		
	Recommended Limits		835	41.5	0.90	N/A	
	Muscle	Measured (12/09/2012)	815	54.6	0.95	22.5	
			825	54.5	0.96		
			835	54.4	0.97		
			850	54.2	0.98		
		Measured (02/04/2013)	815	53.3	0.96	22.6	
			825	53.2	0.97		
			835	53.0	0.98		
850			52.8	1.00			
Recommended Limits		835	55.2	0.97	N/A		
1800	Head	Measured (12/04/2012)	1710	39.0	1.34	22.8	
			1750	39.9	1.38		
			1800	38.7	1.43		
		Measured (12/06/2012)	1710	40.6	1.36	22.4	
			1750	40.5	1.40		
			1800	40.4	1.44		
		Measured (01/31/2013)	1710	38.7	1.38	22.3	
			1750	38.5	1.42		
			1800	38.2	1.47		
		Recommended Limits		1800	40.0	1.40	N/A

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 64(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW		IC 2503A-RFL110LW 2503A-RFP120LW

	Muscle	Measured (12/04/2012)	1710	51.7	1.50	22.8		
			1750	51.6	1.55			
			1800	51.4	1.60			
		Measured (01/31/2013)	1710	51.5	1.49	22.1		
			1750	51.4	1.54			
			1800	51.2	1.59			
		Recommended Limits		1800	53.3	1.52	N/A	
		1900	Head	Measured (11/22/2012)	1850	38.8	1.33	22.8
					1900	38.4	1.38	
1910	38.4				1.39			
1980	38.2				1.46			
Measured (11/26/2012)	1850			39.1	1.33	22.6		
	1900			38.9	1.36			
	1910			38.8	1.37			
	1980			38.8	1.46			
Measured (01/24/2013)	1850			38.3	1.40	22.7		
	1900			38.2	1.44			
	1910			38.1	1.45			
	1980			38.2	1.44			
Measured (01/28/2013)	1850		38.5	1.33	22.5			
	1900		38.3	1.38				
	1910		38.3	1.39				
	1980		38.0	1.47				
Measured (02/14/2013)	1850		38.7	1.34	22.6			
	1900		38.4	1.39				
	1910		38.4	1.40				
	Recommended Limits		1900	40.0		1.40	N/A	
Muscle	Measured (11/22/2012)		1850	51.1	1.52	22.8		
			1900	50.9	1.57			
			1910	50.8	1.58			
			1980	50.8	1.58			
	Measured (11/26/2012)	1850	50.9	1.47	22.6			
		1900	50.7	1.51				
		1910	50.6	1.53				
		1980	50.6	1.53				
	Measured (01/24/2013)	1850	51.0	1.53	22.7			
		1900	50.9	1.58				
		1910	50.9	1.59				
		1980	50.9	1.59				
Measured (02/14/2013)	1850	50.8	1.50	22.6				
	1900	50.7	1.55					
	1910	50.7	1.56					
	Recommended Limits		1900		53.3	1.52	N/A	
2450	Head	Measured (01/04/2013)	2410	38.5	1.82	21.5		
			2450	38.4	1.86			
			2480	38.2	1.88			
		Measured (01/07/2013)	2410	37.9	1.72	22.3		
			2450	37.8	1.76			
			2480	37.6	1.79			
		Measured (01/21/2013)	2410	37.5	1.72	22.5		
			2450	37.4	1.76			
			2480	37.4	1.76			

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			65(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

		Muscle		2480	37.2	1.79	20.5	
			Measured (02/27/2013)	2410	37.8	1.74		
				2450	37.7	1.78		
				2480	37.6	1.82		
			Recommended Limits	2450	39.2	1.80		N/A
			Muscle	Measured (01/07/2013)	2410	51.7	1.86	22.3
					2450	51.6	1.90	
				Measured (01/21/2013)	2480	51.5	1.94	22.5
					2410	51.2	1.85	
					2450	51.1	1.91	
		Measured (02/27/2013)	2480	51.0	1.95	20.5		
			2410	50.3	1.89			
			2450	50.2	1.94			
			Recommended Limits	2480	50.1	1.98	N/A	
5200			Head	Measured (01/14/2013)	5180	34.4	4.65	21.5
	5200				34.4	4.66		
	5280				34.2	4.77		
	Measured (02/25/2013)			5180	34.7	4.72	21.7	
				5200	34.7	4.75		
				5280	34.4	4.83		
		Recommended Limits	5200	36.0	4.66	N/A		
		Muscle	Measured (01/14/2013)	5180	46.8	5.06	21.5	
				5200	46.7	5.09		
				5280	46.6	5.19		
			Measured (02/25/2013)	5180	47.0	5.12	22.1	
				5200	47.0	5.14		
				5320	46.7	5.32		
		Recommended Limits	5200	49.0	5.30	N/A		
5500		Head	Measured (01/14/2013)	5500	34.2	5.10	21.5	
				5620	33.9	5.27		
			Measured (02/25/2013)	5500	34.6	5.13	21.7	
				5620	34.3	5.27		
				Recommended Limits	5500	35.6	4.96	N/A
				Muscle	Measured (01/14/2013)	5500	46.4	5.54
	5620	46.2				5.72		
	Measured (02/25/2013)	5500			47.9	5.64	22.1	
		5620			47.7	5.81		
		Recommended Limits	5500	48.6	5.65	N/A		
5800		Head	Measured (01/10/2013)	5745	34.9	5.43	21.1	
				5800	34.7	5.52		
			Measured (02/25/2013)	5745	34.0	5.33	21.7	
				5800	34.0	5.45		
		Recommended Limits	5800	35.3	5.27	N/A		
		Muscle	Measured (01/10/13)	5745	46.0	5.98	21.0	
				5800	45.9	6.06		
Measured (02/25/2013)			5745	45.8	5.72	22.1		

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 66(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

		5800	45.8	5.85	
	Recommended Limits	5800	48.2	6.00	N/A

Table 6.2-1 Electrical parameters of tissue simulating liquid

Band (MHz)	Tissue Type	Limits / Measured (MM/DD/YYYY)	f (MHz)	Dielectric Parameters		Liquid Temp (°C)
				ϵ_r	σ [S/m]	
5200	Head	Measured (12/11/2014)	5180	34.9	4.75	22.4
			5200	34.8	4.77	
			5280	34.6	4.85	
	Recommended Limits		5200	36.0	4.66	N/A
	Muscle	Measured (12/11/2014)	5180	45.7	5.56	22.4
			5200	45.7	5.59	
5280			45.5	5.70		
Recommended Limits		5200	49.0	5.30	N/A	
5800	Head	Measured (12/11/2014)	5745	34.4	5.36	22.4
			5800	34.3	5.42	
			Recommended Limits		5800	
	Muscle	Measured (12/11/2014)	5745	44.4	6.40	22.4
			5800	44.3	6.49	
			Recommended Limits		5800	

Table 6.2-2 Electrical parameters of tissue simulating liquid

6.2.2 Test Configuration

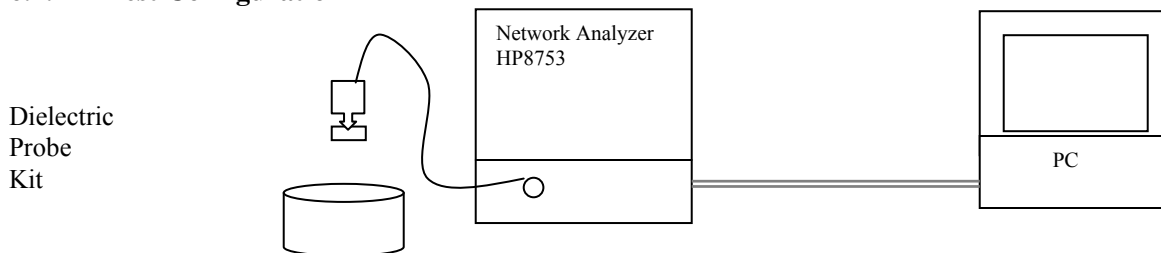




Figure 6.2.2-1 Test configuration

6.2.3 Procedure

1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 67(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

6. Relative permittivity $\epsilon_r = \epsilon'$ and conductivity can be calculated from ϵ'' ($\sigma = \omega \epsilon_0 \epsilon''$)
7. Measure liquid shortly after calibration.
8. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
9. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
10. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
11. Perform measurements.
12. Adjust medium parameters in DASY software for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Head 835 MHz) and press 'Option'-button.
13. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 835 MHz).

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 68(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

7.0 SAR SAFETY LIMITS

Standards/Guideline	Localized SAR Limit (W/kg) General public (uncontrolled)	Localized SAR Limits (W/kg) Workers (controlled)
ICNIRP Standard	2.0 (10g)	10.0 (10g)
IEEE C95.1 Standard	1.6 (1g)	8.0 (1g)


Table 7.0-1 SAR safety limits for Controlled / Uncontrolled environment

Human Exposure	Localized SAR Limits (W/kg) 10g, ICNIRP Standard	Localized SAR Limits (W/kg) 1g, IEEE C95.1 Standard
Spatial Average (averaged over the whole body)	0.08	0.08
Spatial Peak (averaged over any X g of tissue)	2.00	1.60
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.00	4.00 (10g)

Table 7.0-2 SAR safety limits

Uncontrolled Environments are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		69(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW

8.0 DEVICE POSITIONING

8.1 Device holder for SAM Twin Phantom

The Device was positioned for all test configurations using the DASY5 holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

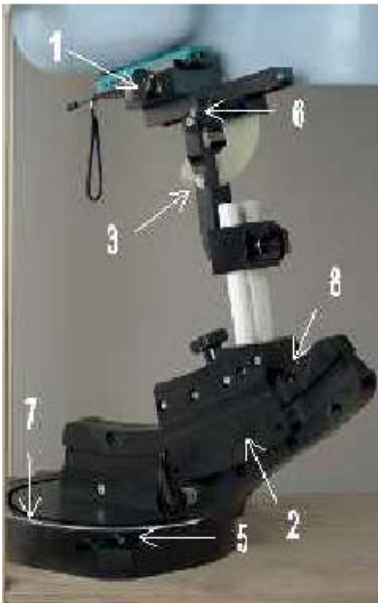



Figure 8.1-1 Device Holder

1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the earpiece is in the symmetry plane of the clamp).
2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the earpiece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and backsides, the phone holder angle (3) is 0°.
3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).
4. Shift the phone clamp (6) so that the earpiece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even after changing the phantom or phantom section.
5. Adjust the device position angles to the desired measurement position.
6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking. (The point of contact depends on the design of the device and the positioning angle).

		Document		Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		70(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW

8.2 Description of the test positioning

8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528- 2003 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

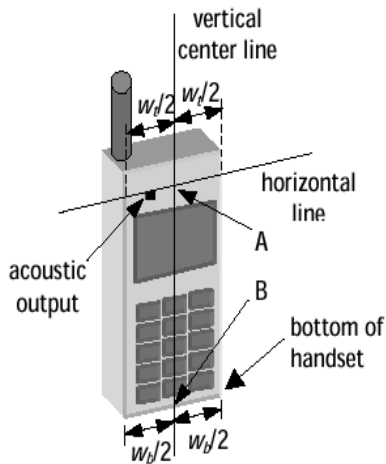


Figure 8.2.1-1 Handset vertical and horizontal reference lines – fixed case

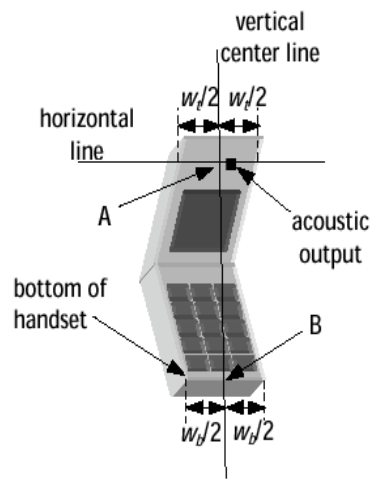



Figure 8.2.1-2 Handset vertical and horizontal reference lines – “clam-shell”

		Document		Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		71(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 8.2.1-1 and 8.2.1-2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 8.2.1-1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 8.2.1-2), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 8.2.1-3), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB (“mouth-back”) - NF (“neck-front”) including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

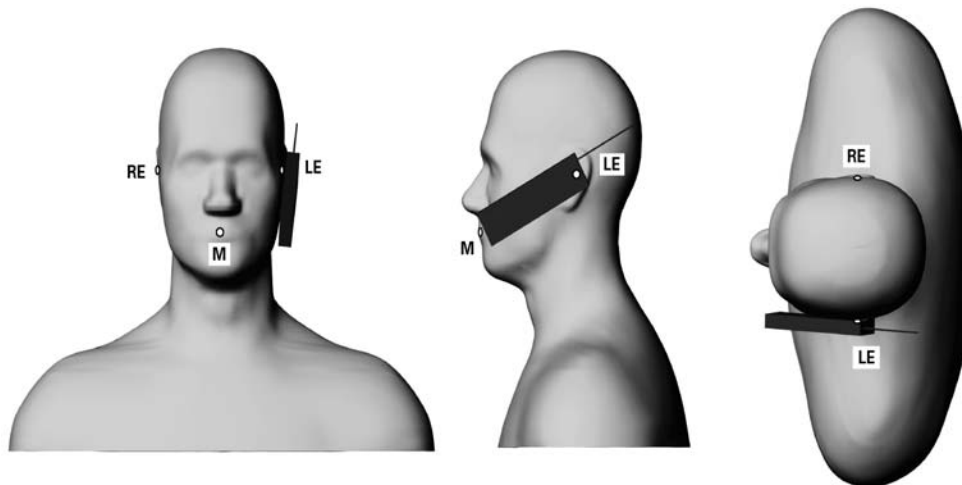



Figure 8.2.1-3 Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 72(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 from above.
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

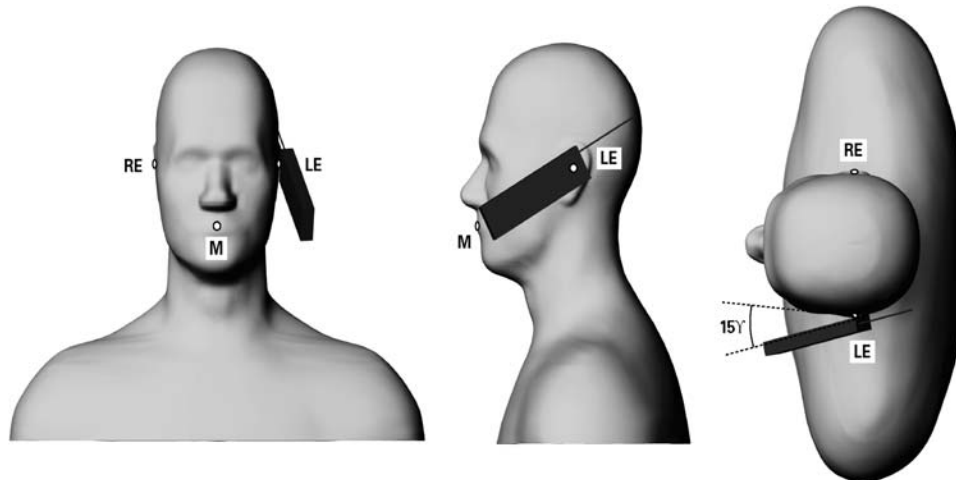


Figure 8.2.1-4 Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

8.2.2 Body-worn Configuration

Body-worn holsters, as shown on Figure 1.4-1, have been test with the device for RF exposure compliance. The device was positioned in each holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the device to simulate hands-free operation in a body worn holster configuration.


In addition, device was tested with 15 mm BB recommended separation distance to allow typical after-market holster to be used. BB body-worn holsters with belt-clip have been designed to maintain ~ 19-20 mm separation distance from body.

8.2.3 Limb/Hand Configuration

BlackBerry device is not a limb-worn device and hasn't been tested for such a configuration.

As per Clause 6.1.4.9 in the IEC/EN 62209-2 standard:

"Additional studies remain needed for devising a representative method for evaluating SAR in the hand of hand-held devices. Future versions of this standard are intended to contain a test method based on scientific data and rationale. Annex J presents the currently available test procedure."

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 73(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

Clause J.2 of the IEC/EN 62209-2 states that testing for compliance for the exposure of the hand is not applicable for devices that are intended to being hand-held to enable use at the ear (see EN 62209-1) or worn on the body when transmitting.

In addition, BlackBerry device is not intended to be held in hand at a distance of larger than 200 mm from the head and body during normal use.

9.0 HIGH LEVEL EVALUATION

9.1 Maximum search

The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

9.2 Extrapolation

The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.


9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are only available for the predefined cube 5x5x7 / 7x7x9 scan. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm / 22x22x22 with 7.5 / 5 / 4.0 mm resolution in (x,y) and 5mm / 2mm resolution in z axis amounts to 175 / 693 measurement points. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.


		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			74(105)	
Author Data	Dates of Test	Test Report No	FCC ID:		IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

10.0 MEASUREMENT UNCERTAINTY

DASY5 Uncertainty Budget According to IEEE 1528/2003 [1]								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±5.5 %	N	1	1	1	±5.5 %	±5.5 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	R	$\sqrt{3}$	0.64	0.43	±1.8 %	±1.2 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1 %	∞
Liquid Permittivity (target)	±5.0 %	R	$\sqrt{3}$	0.6	0.49	±1.7 %	±1.4 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5 %	±1.2 %	∞
Combined Std. Uncertainty						±10.7 %	±10.5 %	387
Expanded STD Uncertainty						±21.4 %	±21.0 %	

Table 10.0-1 Worst-Case uncertainty budget for DASY5 assessed according to IEEE P1528.
Source: Schmid & Partner Engineering AG.


[1] The budget is valid for the frequency range 300MHz - 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			75(105)	
Author Data	Dates of Test	Test Report No	FCC ID:		IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

Relative DASY5 Uncertainty Budget for Fast SAR Tests According to IEEE 1528/2011 and IEC 62209-1/2011 (0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.0 %	N	1	0	0			
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	0	0			
Response Time	±0.8 %	R	$\sqrt{3}$	0	0			
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	0	0			
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Spatial x-y-Resolution	±10.0 %	R	$\sqrt{3}$	1	1	±5.8 %	±5.8 %	∞
Fast SAR z-Approximation	±7.0 %	R	$\sqrt{3}$	1	1	±4.0 %	±4.0 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling	±0 %	R	$\sqrt{3}$	0	0			
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	$\sqrt{3}$	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	0	0			
Liquid Conductivity (mea.)	±2.5 %	R	$\sqrt{3}$	0	0			
Liquid Permittivity (mea.)	±2.5 %	R	$\sqrt{3}$	0	0			
Temp. unc. - Conductivity	±3.4 %	R	$\sqrt{3}$	0	0			
Temp. unc. - Permittivity	±0.4 %	R	$\sqrt{3}$	0	0			
Combined Std. Uncertainty						±11.4 %	±11.4 %	748
Expanded STD Uncertainty						±22.7 %	±22.7 %	


Table 10.0-2 Worst-Case uncertainty budget for DASY5 assessed according to IEEE P1528/2011 and IEC 62209-1/2011

Source: Schmid & Partner Engineering AG.

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			76(105)	
Author Data	Dates of Test	Test Report No	FCC ID:		IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

DASY5 Uncertainty Budget for the 3 - 6 GHz range								
Error Description	Uncert. value	Prob. Dist.	Div.	(c ₁) 1g	(c ₁) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v ₁) v _{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±9.9 %	R	√3	1	1	±5.7 %	±5.7 %	∞
Max. SAR Eval.	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	R	√3	0.64	0.43	±1.8 %	±1.2 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1 %	∞
Liquid Permittivity (target)	±5.0 %	R	√3	0.6	0.49	±1.7 %	±1.4 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5 %	±1.2 %	∞
Combined Std. Uncertainty						±12.8 %	±12.6 %	330
Expanded STD Uncertainty						±25.6 %	±25.2 %	

**Table 10.0-3 Worst-Case uncertainty budget for DASY52 assessed according to IEEE P1528.
Source: Schmid & Partner Engineering AG.**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 77(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

11.0 TEST RESULTS

11.1 SAR Measurement results at highest power measured against the head

Test Position	Mode	f (MHz)	Ch.	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 17	710	23790	QPSK	1	49	23.7	0.45	0.13	0.45
		710	23790	QPSK	25	25	22.5	0.33	0.11	0.33
Right Head 15° Tilt	LTE Band 17	710	23790	QPSK	1	49	23.7	0.26	0.11	0.26
Left Head Cheek	LTE Band 17	710	23790	QPSK	1	49	23.7	0.59	-0.02	0.59
		710	23790	QPSK	25	25	22.5	0.47	0.17	0.47
Left Head 15° Tilt	LTE Band 17	710	23790	QPSK	1	49	23.7	0.27	-0.02	0.27

Table 11.1-1a SAR results for LTE Band 17 (10MHz BW) head configuration

Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Note 2: Only required to test the configuration (channel and offset) yielding the highest conducted power for RB 1 and RB 50% when combined 1g avg. SAR <0.8 W/Kg or 3dB lower than the limit for both cases.


Note 3: If 1g avg. SAR >0.8 W/Kg or not at least 3dB lower than the limit, than the remaining channels for that RB number must be tested and one additional scan must be done with RB 100%. For all additional scans the highest conducted power configuration (channel and offset) must be used.

Note 4: Tested only the highest bandwidth since conducted power on other bandwidths is about the same.

Note 5: Did not test 16 QAM as conducted power was lower than QPSK.

Test Position	Mode	f (MHz)	Channel	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Left Head Cheek	LTE Band 17	710	23790	QPSK	1	49	23.7	0.56	0.00	0.56

**Table 11.1-1b SAR results for LTE Band 17 (10MHz BW) head configuration
2100mA Battery**

		Document				Page			
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3				78(105)			
Author Data		Dates of Test		Test Report No		FCC ID:		IC	
Andrew Becker		Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		RTS-6026-1303-02 Rev 3		L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Ch.	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 5	836.5	20525	QPSK	1	0	23.8	0.54	-0.18	0.54
		836.5	20525	QPSK	25	0	22.6	0.41	0.43	0.41
Right Head 15° Tilt	LTE Band 5	836.5	20525	QPSK	1	0	23.8	0.33	-0.08	0.33
Left Head Cheek	LTE Band 5	836.5	20525	QPSK	1	0	23.8	0.75	0.00	0.75
		836.5	20525	QPSK	25	0	22.6	0.56	-0.13	0.56
Left Head 15° Tilt	LTE Band 5	836.5	20525	QPSK	1	0	23.8	0.33	-0.07	0.33


Table 11.1-2a RFL111LW SAR results for LTE Band 5 (10MHz BW) head configuration

Test Position	Mode	f (MHz)	Channel	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Left Head Cheek	LTE Band 5	836.5	20525	QPSK	1	0	23.8	0.74	0.03	0.74

**Table 11.1-2b RFL111LW SAR results for LTE Band 5 (10MHz BW) head configuration
2100mA Battery**

Test Position	Mode	f (MHz)	Channel	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 5	836.5	20525	QPSK	1	0	23.8	0.29	0.06	0.29
Left Head Cheek	LTE Band 5	836.5	20525	QPSK	1	0	23.8	0.38	-0.03	0.38

Table 11.1-2c RFP121LW SAR results for LTE Band 5 (10MHz BW) head configuration

		Document			Page
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			79(105)
Author Data	Dates of Test	Test Report No	FCC ID:	IC	
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Ch.	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	2-slots DTM 850 MHz	824.2	128					
		836.8	190	30.4		0.54	-0.05	0.54
		848.8	251					
Right Head 15° Tilt	2-slots DTM 850 MHz	824.2	128					
		836.8	190	30.4		0.37	0.05	0.37
		848.8	251					
Right Head Cheek	1-slot GSM 850 MHz	824.2	128					
		836.8	190	33.9		0.66	-0.09	0.66
		848.8	251					
Left Head Cheek	2-slots DTM 850 MHz	824.2	128					
		836.8	190	30.4		0.68	-0.22	0.72
		848.8	251					
Left Head Cheek	3-slots DTM 850 MHz	824.2	128					
		836.8	190	29.1		0.71	-0.16	0.71
		848.8	251					
Left Head Cheek	4-slots GSM/EDGE 850 MHz	824.2	128	27.6		0.70	0.30	0.70
		836.8	190	27.4		0.83	-0.14	0.83
		848.8	251	27.4		0.89	0.20	0.89
		848.8	251	27.4	2 nd scan	0.94	-0.14	0.94
Left Head 15° Tilt	2-slots DTM 850 MHz	824.2	128					
		836.8	190	30.4		0.40	-0.16	0.40
		848.8	251					
Left Head Cheek	1-slot GSM 850 MHz	824.2	128					
		836.8	190	33.9		0.83	-0.02	0.83
		848.8	251					

Table 11.1-3a RFL111LW SAR results for GSM/DTM 850 head configuration


Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Note 2: Only Middle channel was tested when 1g Average SAR < 0.8 W/Kg or 3dB lower than the limit.

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Left Head Cheek	4-slots GSM/EDG E 850 MHz	824.2	128				
		836.8	190				
		848.8	254	27.4	0.94	-0.18	0.94

**Table 11.1-3b RFL111LW SAR results for GSM/DTM 850 head configuration
2100mA Battery**


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 80(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	1-slot	824.2	128				
	GSM	836.8	190	33.9	0.53	-0.03	0.53
	850 MHz	848.8	251				
Left Head Cheek	4-slots	824.2	128				
	GSM/EDGE	836.8	190				
	850 MHz	848.8	251	27.4	0.67	0.23	0.67

**Table 11.1-3c RFP121LW SAR results for GSM/DTM 850 head configuration
2100mA Battery**

Test Position	Mode	f (MHz)	Ch.	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA	826.4	4132					
	FDD V	836.4	4182	22.6		0.63	0.22	0.63
	850 MHz	846.6	4233					
Right Head 15° Tilt	WCDMA	826.4	4132					
	FDD V	836.4	4182	22.6		0.39	0.17	0.39
	850 MHz	846.6	4233					
Left Head Cheek	WCDMA	826.4	4132	22.8		0.90	0.03	0.90
	FDD V	836.4	4182	22.6		0.89	-0.11	0.89
	850 MHz	846.6	4233	22.5		1.00	-0.08	1.00
		846.6	4233	22.5	2 nd scan	0.98	-0.05	0.98
Left Head 15° Tilt	WCDMA	826.4	4233					
	FDD V	836.4	4132	22.6		0.39	0.12	0.39
	850 MHz	846.6	4182					

Table 11.1-4a RFL111LW SAR results for WCDMA FDD V head configuration


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 81(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Left Head Check	WCDMA FDD V 850 MHz	826.4	4132				
		836.4	4182				
		846.6	4233	22.5	1.03	-0.15	1.03

**Table 11.1-4b RFL111LW SAR results for WCDMA FDD V head configuration
2100mA Battery**

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	SAR, averaged over 1 g		
					Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Check	WCDMA FDD V 850 MHz	826.4	4132				
		836.4	4182	22.6	0.55	0.00	0.55
		846.6	4233				
Left Head Check	WCDMA FDD V 850 MHz	826.4	4132				
		836.4	4182				
		846.6	4233	22.5	0.77	-0.14	0.77

**Table 11.1-4c RFP121LW SAR results for WCDMA FDD V head configuration
2100mA Battery**

		Document				Page			
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3				82(105)			
Author Data		Dates of Test		Test Report No		FCC ID:		IC	
Andrew Becker		Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		RTS-6026-1303-02 Rev 3		L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Ch.	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
									Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 4	1720.0	20050	QPSK							
		1732.5	20175	QPSK							
		1745.0	20300	QPSK	1	99	23.8		0.75	0.09	0.75
		1745.0	20300	QPSK	50	0	22.4		0.55	0.11	0.55
Right Head 15° Tilt	LTE Band 4	1720.0	20050	QPSK							
		1732.5	20175	QPSK							
		1745.0	20300	QPSK	1	99	23.8		0.65	-0.13	0.65
Left Head Cheek	LTE Band 4	1720.0	20050	QPSK	1	0	23.6		1.12	0.29	1.12
		1732.5	20175	QPSK	1	99	23.6		1.16	-0.01	1.16
		1745.0	20300	QPSK	1	99	23.8		1.16	-0.19	1.16
		1745.0	20300	QPSK	1	99	23.8	2nd scan	1.04	-0.10	1.04
		1720.0	20050	QPSK	50	0	22.3		0.98	0.01	0.98
		1732.5	20175	QPSK	50	50	22.2		1.01	0.07	1.01
		1745.0	20300	QPSK	50	0	22.4		1.04	-0.07	1.04
		1745.0	20300	QPSK	100	0	22.3		0.88	0.05	0.88
Left Head 15° Tilt	LTE Band 4	1720.0	20050	QPSK							
		1732.5	20175	QPSK							
		1745.0	20300	QPSK	1	99	23.8		0.58	0.00	0.58


Table 11.1-5a RFL111LW SAR results for LTE Band 4 (20MHz BW) head configuration

Test Position	Mode	f (MHz)	Channel	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Left Head Cheek	LTE Band 4	1720.0	20050	QPSK						
		1732.5	20175	QPSK						
		1745.0	20300	QPSK	1	99	23.8	1.14	-0.06	1.14

**Table 11.1-5b RFL111LW SAR results for LTE Band 4 (20MHz BW) head configuration
2100mA Battery**


Test Position	Mode	f (MHz)	Ch.	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
									Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 4	1720.0	20050	QPSK							
		1732.5	20175	QPSK							
		1745.0	20300	QPSK	1	99	23.8		1.36	-0.05	1.36
		1745.0	20300	QPSK	1	99	23.8	2nd scan	1.37	0.06	1.37

Table 11.1-5c RFP121LW SAR results for LTE Band 4 (20MHz BW) head configuration

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 83(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD IV 1800 MHz	1712.4	1312					
		1732.6	1413	22.3		0.53	0.09	0.53
		1752.6	1513					
Right Head 15° Tilt	WCDMA FDD IV 1800 MHz	1712.4	1312					
		1732.6	1413	22.3		0.40	-0.04	0.40
		1752.6	1513					
Left Head Cheek	WCDMA FDD IV 1800 MHz	1712.4	1312	22.4		1.29	-0.03	1.29
		1712.4	1312	22.4	2 nd Scan	1.28	0.07	1.28
		1732.6	1413	22.3		1.16	0.03	1.16
		1752.6	1513	22.6		1.25	0.00	1.25
Left Head 15° Tilt	WCDMA FDD IV 1800 MHz	1712.4	1312					
		1732.6	1413	22.3		0.38	0.10	0.38
		1752.6	1513					

Table 11.1-6 RFP121LW SAR results for WCDMA FDD IV head configuration

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 84(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Ch.	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 2	1880	18900	QPSK	1	0	22.3	0.47	0.36	0.47
		1880	18900	QPSK	1	99	22.2	0.46	0.01	0.46
		1880	18900	QPSK	50	0	21.0	0.36	0.01	0.36
Right Head 15° Tilt	LTE Band 2	1880	18900	QPSK	1	0	22.3	0.43	0.12	0.43
Left Head Cheek	LTE Band 2	1880	18900	QPSK	1	0	22.3	0.74	-0.14	0.74
		1880	18900	QPSK	1	99	22.2	0.73	0.03	0.73
		1880	18900	QPSK	50	0	21.0	0.59	0.00	0.59
Left Head 15° Tilt	LTE Band 2	1880	18900	QPSK	1	0	22.3	0.42	0.17	0.42


Table 11.1-7a RFL111LW SAR results for LTE Band 2 (20MHz BW) head configuration

Test Position	Mode	f (MHz)	Ch.	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
									Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 2	1860	18700	QPSK	1	0	22.3		0.88	-0.06	0.88
		1880	18900	QPSK	1	0	22.3		0.86	-0.15	0.86
		1900	19100	QPSK	1	0	22.2		0.90	0.08	0.90
		1900	19100	QPSK	1	0	22.2	2 nd Scan	0.92	0.00	0.92
		1880	18900	QPSK	50	0	21.0		0.64	-0.04	0.64
		1860	18700	QPSK	100	0	21.0		0.63	-0.12	0.63

**Table 11.1-7b RFL111LW SAR results for LTE Band 2 (20MHz BW) head configuration
2100mA Battery**

Test Position	Mode	f (MHz)	Channel	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	LTE Band 2	1880	18900	QPSK	1	0	23.2	0.49	0.07	0.49
		1880	18900	QPSK	1	99	23.1	0.53	-0.03	0.53
		1880	18900	QPSK	50	50	23.2	0.41	-0.03	0.41
Left Head Cheek	LTE Band 2	1880	18900	QPSK	1	0	23.2	1.04	0.06	1.04
		1880	18900	QPSK	1	50	23.1	1.01	-0.08	1.01
		1880	18900	QPSK	1	99	23.2	1.03	-0.02	1.03
		1860	18700	QPSK	1	0	23.0	1.01	-0.12	1.01
		1900	19100	QPSK	1	0	23.2	0.94	-0.04	0.94
		1880	18900	QPSK	50	50	23.2	0.80	0.02	0.80
		1880	18900	QPSK	100	0	21.9	0.79	0.04	0.79

Table 11.1-7c RFP121LW SAR results for LTE Band 2 (20MHz BW) head configuration


		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			85(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC		
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW		

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	2-slots DTM 1900 MHz	1850.2	512					
		1880.0	661	28.6		0.48	-0.04	0.48
		1909.8	810					
Right Head 15° Tilt	2-slots DTM 1900 MHz	1850.2	512					
		1880.0	661	28.6		0.42	0.04	0.42
		1909.8	810					
Right Head Cheek	1-slot GSM 1900 MHz	1850.2	512					
		1880.0	661	29.1		0.40	0.16	0.40
		1909.8	810					
Left Head Cheek	2-slots DTM 1900 MHz	1850.2	512	28.6		0.90	-0.06	0.90
		1850.2	512	28.6	2 nd scan	0.95	0.02	0.95
		1880.0	661	28.6		0.85	0.07	0.85
		1909.8	810	28.6		0.81	-0.11	0.81
Left Head Cheek	3-slots DTM 1900 MHz	1850.2	512	26.0		0.73	0.02	0.73
		1880.0	661					
		1909.8	810					
Left Head Cheek	4-slots GSM/EDGE 1900 MHz	1850.2	512	25.4		0.82	0.00	0.82
		1880.0	661					
		1909.8	810					
Left Head 15° Tilt	2-slots DTM 1900 MHz	1850.2	512					
		1880.0	661	28.6		0.41	-0.07	0.41
		1909.8	810					
Left Head Cheek	1-slot GSM 1900 MHz	1850.2	512	28.9		0.70	0.08	0.70
		1880.0	661					
		1909.8	810					

Table 11.1-8a SAR results for GSM/DTM 1900 head configuration

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Left Head Cheek	2-slots DTM 1900 MHz	1850.2	512	28.6		1.01	-0.07	1.01
		1850.2	512	28.6	2 nd scan	0.91	0.02	0.91
		1880.0	661					
		1909.8	810					

**Table 11.1-8b SAR results for GSM/DTM 1900 head configuration
2100mA Battery**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 86(105)	
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW		IC 2503A-RFL110LW 2503A-RFP120LW

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD II 1900 MHz	1852.4	9262					
		1880.0	9400	22.8		0.54	0.27	0.54
		1907.6	9538					
Right Head 15° Tilt	WCDMA FDD II 1900 MHz	1852.4	9262					
		1880.0	9400	22.8		0.50	0.12	0.50
		1907.6	9538					
Left Head Cheek	WCDMA FDD II 1900 MHz	1852.4	9262	22.8		0.93	-0.04	0.93
		1880.0	9400	22.8		0.98	0.14	0.98
		1907.6	9538	22.8		1.03	0.09	1.03
		1907.6	9538	22.8	2 nd Scan	1.07	-0.03	1.07
Left Head 15° Tilt	WCDMA FDD II 1900 MHz	1852.4	9262					
		1880.0	9400	22.8		0.50	0.03	0.50
		1907.6	9538					


Table 11.1-9a RFL111LW SAR results for WCDMA FDD II head configuration

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Left Head Cheek	WCDMA FDD II 1900 MHz	1852.4	9262					
		1880.0	9400					
		1907.6	9538	22.8		1.07	-0.08	1.07
		1907.6	9538	22.8	2 nd Scan	1.03	-0.00	1.03

**Table 11.1-9b RFL111LW SAR results for WCDMA FDD II head configuration
2100mA Battery**

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
						Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
Right Head Cheek	WCDMA FDD II 1900 MHz	1852.4	9262					
		1880.0	9400	22.8		0.59	0.17	0.59
		1907.6	9538					
Left Head Cheek	WCDMA FDD II 1900 MHz	1852.4	9262					
		1880.0	9400					
		1907.6	9538	22.8		1.12	-0.09	1.12
		1907.6	9538	22.8	2 nd scan	1.11	-0.05	1.11

**Table 11.1-9c RFP121LW SAR results for WCDMA FDD II head configuration
2100mA Battery**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 87(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	802.11 b 2450 MHz	2412	1	19.9	-0.08	0.32	0.15
		2437	6				
		2462	11				
Right Head 15° Tilt	802.11 b 2450 MHz	2412	1	19.9	-0.18	0.32	0.16
		2437	6				
		2462	11				
Left Head Cheek	802.11 b 2450 MHz	2412	1	19.9	-0.04	0.21	0.11
		2437	6				
		2462	11				
Left Head 15° Tilt	802.11 b 2450 MHz	2412	1	19.9	-0.19	0.29	0.15
		2437	6				
		2462	11				


Table 11.1-10a RFL111LW SAR results for WiFi/WLAN/802.11b head configuration (Rev2-01/Rev3-04)

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	802.11 b 2450 MHz	2412	1	19.9	0.22	0.30	0.15
		2437	6				
		2462	11				

Table 11.1-10b RFL111LW SAR results for WiFi/WLAN/802.11b head configuration 2100mA Battery (Rev2-01/Rev3-04)

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	802.11 b 2450 MHz	2412	1	18.0	0.45	0.23	0.11
		2437	6				
		2462	11				

Table 11.1-10c RFL111LW SAR results for WiFi/WLAN/802.11b head configuration (Rev3-03)

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			88(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC		
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW		

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	802.11 b 2450 MHz	2412	1				
		2437	6	18.0	0.26	0.23	0.12
		2462	11				
Left Head Cheek	802.11 b 2450 MHz	2412	1				
		2437	6	18.0	0.06	0.15	0.08
		2462	11				


Table 11.1-10d RFP121LW SAR results for WiFi/WLAN/802.11b head configuration

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	Bluetooth 2450 MHz	2402	0				
		2441	39	10.2	-0.34	0.00	0.00
		2480	78				
Right Head 15° Tilt	Bluetooth 2450 MHz	2402	0				
		2441	39	10.2	0.35	0.00	0.00
		2480	78				
Left Head Cheek	Bluetooth 2450 MHz	2402	0				
		2441	39	10.2	2.44	0.00	0.00
		2480	78				
Left Head 15° Tilt	Bluetooth 2450 MHz	2402	0				
		2441	39	10.2	-0.48	0.00	0.00
		2480	78				

Table 11.1-11a RFL111LW SAR results for Bluetooth head configuration

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	Bluetooth 2450 MHz	2402	0				
		2441	39	10.2	0.94	0.00	0.00
		2480	78				

Table 11.1-11b RFP121LW SAR results for Bluetooth head configuration

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 89(105)	
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW		IC 2503A-RFL110LW 2503A-RFP120LW

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	802.11 a 5180-5825 MHz	5240	48	19.3	0.65	0.33	0.12
		5260	52	19.3	0.23	0.33	0.12
		5520	104	19.6	-0.13	0.21	0.07
		5745	149	16.3	0.21	0.21	0.07
Right Head 15° Tilt	802.11 a 5180-5825 MHz	5300	52	19.3	0.65	0.39	0.14
Left Head Cheek	802.11 a 5180-5825 MHz	5240	48	19.3	0.27	0.19	0.07
		5260	52	19.3	-0.06	0.22	0.08
		5520	104	19.6	0.49	0.16	0.06
		5745	149	16.3	0.75	0.08	0.03
Left Head 15° Tilt	802.11 a 5180-5825 MHz	5260	52	19.3	0.38	0.26	0.10


Table 11.1-12a RFL111LW SAR results for 802.11a head configuration (Rev2-01/Rev3-04)

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head 15° Tilt	802.11 a 5180-5825 MHz	5240	48				
		5260	52	19.3	0.09	0.37	0.14
		5520	104				
		5745	149				

**Table 11.1-12b RFL111LW SAR results for 802.11a head configuration
2100mA Battery (Rev2-01/Rev3-04)**


Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head 15° Tilt	802.11 a 5180-5825 MHz	5260	52	12.9	0.78	0.10	0.04

**Table 11.1-12c RFL111LW SAR results for 802.11a head configuration
(Rev 3-03)**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 90(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Test Position	Mode	f (MHz)	Channel	Cond. Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Right Head Cheek	802.11 a 5180-5825 MHz	5300	52	12.9	0.33	0.10	0.04

Table 11.1-12d RFP121LW SAR results for 802.11a head configuration

		Document				Page			
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3				91(105)			
Author Data		Dates of Test		Test Report No		FCC ID:		IC	
Andrew Becker		Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		RTS-6026-1303-02 Rev 3		L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

11.2 SAR measurement results at highest power measured against the body using accessories

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
										Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 17	710	23790	Body Hotspot Mode	1.0	Back	QPSK	1	49	23.7	0.75	-0.09	0.75
	710	23790		1.0	Back	QPSK	25	25	22.5	0.59	0.06	0.59
	710	23790		1.0	Front	QPSK	1	49	23.7	0.51	-0.01	0.51
	710	23790		1.0	Left	QPSK	1	49	23.7	0.34	-0.01	0.34
	710	23790		1.0	Right	QPSK	1	49	23.7	0.15	-0.03	0.15
	710	23790		1.0	Bottom	QPSK	1	49	23.7	0.11	-0.14	0.11
	710	23790		1.0	Back+HS	QPSK	1	49	23.7	0.68	0.02	0.68
LTE Band 17	710	23790	Body-worn	1.5	Back	QPSK	1	49	23.7	0.46	-0.02	0.46
	710	23790		Holster	Back	QPSK	1	49	23.7	0.33	0.04	0.33
	710	23790		Holster	Front	QPSK	1	49	23.7	0.27	-0.03	0.27

Table 11.2-1a LTE Band 17 (10MHz BW) body-worn and Hotspot configurations

Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$

Note 2: Only required to test the configuration (channel and offset) yielding the highest conducted power for RB 1 and RB 50% when combined 1g avg. SAR <0.8 W/Kg or 3dB lower than the limit for both cases.

Note 3: If 1g avg. SAR >0.8 W/Kg or not at least 3dB lower than the limit, than the remaining channels for that RB number must be tested and one additional scan must be done with RB 100%. For all additional scans the highest conducted power configuration (channel and offset) must be used.

Note 4: Tested only the highest bandwidth since conducted power on other bandwidths is about the same.


Note 5: Did not test 16 QAM as conducted power was lower than QPSK.

Note 6: Device was tested with 15 mm BB recommended separation distance to allow typical after-market holster to be used. BB body-worn holsters with belt-clip have been designed to maintain ~ 19-20 mm separation distance from body.

Note 7: For Hot Spot mode any side of the phone that is further than 2.5 cm away from the transmitting antenna can be exempted from testing.

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
										Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 17	710	23790	Body Hotspot Mode	1.0	Back	QPSK	1	49	23.7	0.75	0.00	0.75

**Table 11.2-1b SAR results for LTE Band 17 (10MHz BW) body-worn and Hotspot configurations
2100 mA battery**


		Document				Page			
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3				92(105)			
Author Data		Dates of Test		Test Report No		FCC ID:		IC	
Andrew Becker		Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		RTS-6026-1303-02 Rev 3		L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/Holster	Side	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
										Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 5	844	20600	Body Hotspot Mode	1.0	Back	QPSK	1	0	22.0	0.48	-0.02	0.48
	844	20600		1.0	Back	QPSK	1	25				
	844	20600		1.0	Back	QPSK	1	49				
	829	20450		1.0	Back	QPSK	25	0	21.6	0.45	-0.11	0.45
	829	20450		1.0	Back	QPSK	25	25				
	829	20450		1.0	Back	QPSK	50	0				
	844	20600		1.0	Front	QPSK	1	0	22.0	0.40	0.00	0.40
	844	20600		1.0	Right	QPSK	1	0	22.0	0.19	0.01	0.19
	844	20600		1.0	Left	QPSK	1	0	22.0	0.43	-0.01	0.43
	844	20600		1.0	Bottom	QPSK	1	0	22.0	0.04	-0.06	0.04
	844	20600		1.0	Back+HS	QPSK	1	0	22.0	0.43	0.15	0.43
	844	20600		1.0	Back 2100mA	QPSK	1	0	22.0	0.50	-0.08	0.50
	LTE Band 5	836.5		20525	Body-worn	1.5	Back	QPSK	1	0	23.8	0.58
836.5		20525	Holster	Back		QPSK	1	0	23.8	0.52	0.03	0.52
836.5		20525	Holster	Front		QPSK	1	0	23.8	0.48	0.06	0.48

Table 11.2-2a RFL111LW SAR results for LTE Band 5 (10MHz BW) body-worn and Hotspot configurations

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/Holster	Side	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
										Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 5	844	20600	Body Hotspot Mode	1.0	Back	QPSK	1	0				
	844	20600		1.0	Back 2100mA	QPSK	1	0	22.0	0.47	-0.04	0.47
LTE Band 5	836.5	20525	Body-worn	1.5	Back	QPSK	1	0	23.8	0.63	0.10	0.63
	836.5	20525		Holster	Back	QPSK	1	0				
	836.5	20525		Holster	Front	QPSK	1	0				

Table 11.2-2b RFP121LW SAR results for LTE Band 5 (10MHz BW) body-worn and Hotspot configurations


		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			93(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC		
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW		

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	SAR, averaged over 1 g		
							Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS/ EDGE 850 MHz	824.2	128	Body Hotspot Mode	1.0	Back				
	836.8	190		1.0	Back	27.2	0.43	-0.10	0.43
	848.8	251		1.0	Back				
	836.8	190		1.0	Front	27.2	0.37	-0.06	0.37
	836.8	190		1.0	Right	27.2	0.21	-0.01	0.21
	836.8	190		1.0	Left	27.2	0.41	0.01	0.41
	836.8	190		1.0	Bottom	27.2	0.06	-0.07	0.06
	836.8	190		1.0	Back+HS	27.2	0.36	-0.08	0.36
	836.8	190		1.0	Back 2100mA	27.2	0.45	-0.09	0.45
3-slots GPRS/ EDGE 850 MHz	836.8	190		1.0	Back	25.2	0.41	-0.12	0.41
4-slots GPRS/ EDGE 850 MHz	836.8	190		1.0	Back	24.1	0.43	0.01	0.43
2-slots GPRS 850 MHz	836.8	190	Body- worn	1.5	Back	30.3	0.58	-0.11	0.58
	836.8	190		Holster	Back	30.3	0.51	0.10	0.51
	836.8	190		Holster	Front	30.3	0.49	0.04	0.49

Table 11.2-3a RFL111LW SAR results for EDGE/EGPRS 850 body-worn and Hotspot configurations

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Conduct ed Output Power (dBm)	SAR, averaged over 1 g		
							Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS/ EDGE 850 MHz	836.8	190	Body Hotspot Mode	1.0	Back				
	824.2	128		1.0	Back 2100mA	27.2	0.88	-0.01	0.88
	836.8	190		1.0	Back 2100mA	27.2	0.84	-0.02	0.84
	848.8	251		1.0	Back 2100mA	27.2	0.75	-0.18	0.75
2-slots GPRS 850 MHz	836.8	190	Body- worn	1.5	Back	30.3	0.56	-0.10	0.56
	836.8	190		Holster	Back				
	836.8	190		Holster	Front				

Table 11.2-3b RFP121LW SAR results for EDGE/EGPRS 850 body-worn and Hotspot configurations

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			94(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC		
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW		

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	SAR, averaged over 1 g		
							Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD V 850 MHz	826.4	4132	Body Hotspot Mode	1.0	Back				
	836.4	4182		1.0	Back	22.6	0.62	-0.09	0.62
	846.6	4233		1.0	Back				
	826.4	4132		1.0	Front				
	836.4	4182		1.0	Front	22.6	0.52	0.08	0.52
	846.6	4233		1.0	Front				
	836.4	4182		1.0	Right	22.6	0.25	0.10	0.25
	836.4	4182		1.0	Left	22.6	0.55	0.00	0.55
	836.4	4182		1.0	Bottom	22.6	0.05	-0.09	0.05
	836.4	4182		1.0	Back+HS	22.6	0.55	0.08	0.55
	836.4	4182		1.0	Back + 2100mA	24.4	0.62	-0.03	0.62
WCDMA FDD V 850 MHz	836.4	4182	Body-worn	1.5	Back	24.4	0.75	-0.11	0.75
	836.4	4182		Holster	Back	24.4	0.62	-0.10	0.62
	836.4	4182		Holster	Front	24.4	0.58	-0.17	0.58

Table 11.2-4a RFL111LW SAR results for WCDMA FDD V body-worn and Hotspot configurations

Note 1: If the power drift is ≤ -0.200 dB, the extrapolated SAR is calculated using the formula:

$$\text{Extrapolated SAR} = (\text{Measured SAR}) * 10^{(|\text{Power Drift (dB)}| / 10)}$$


Note 2: Only Middle channel was tested when 1g Average SAR < 0.8 W/Kg or 3dB lower than the limit.

Note 3: Device was tested with 15 mm BB recommended separation distance to allow typical after-market holster to be used. BB body-worn holsters with belt-clip have been designed to maintain ~ 19 mm separation distance from body.

Note 4: For Hot Spot mode any side of the phone that is further than 2.5 cm away from the transmitting antenna can be exempted from testing.

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	SAR, averaged over 1 g		
							Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD V 850 MHz	826.4	4132	Body	1.0	Back				
	836.4	4182	Hotspot	1.0	Back	22.6	0.51	0.01	0.51
	846.6	4233	Mode	1.0	Back				
WCDMA FDD V 850 MHz	836.4	4182	Body-worn	1.5	Back	24.4	0.68	-0.04	0.68
	836.4	4182		Holster	Back				
	836.4	4182		Holster	Front				

Table 11.2-4b RFP121LW SAR results for WCDMA FDD V body-worn and Hotspot configurations

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 95(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
											Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 4	1745.0	20300	Body Hotspot Mode	1.0	Back	QPSK	1	99	22.9		1.02	0.12	1.02
	1732.5	20175		1.0	Back	QPSK	1	0	22.7		1.04	-0.03	1.04
	1732.5	20175		1.0	Back	QPSK	1	0	22.7	2 nd Scan	1.01	-0.02	1.01
	1720.0	20050		1.0	Back	QPSK	1	99	22.7		1.03	-0.11	1.03
	1720.0	20050		1.0	Back	QPSK	50	0	22.2		0.86	0.05	0.86
	1732.5	20175		1.0	Back	QPSK	50	0	22.1		0.90	-0.04	0.90
	1745.0	20300		1.0	Back	QPSK	50	50	22.1		0.91	-0.01	0.91
	1720.0	20050		1.0	Back	QPSK	100	0	22.2		0.89	0.02	0.89
	1732.5	20175		1.0	Front	QPSK	1	0	22.7		0.57	0.07	0.57
	1732.5	20175		1.0	Left	QPSK	1	0	22.7		0.31	-0.05	0.31
	1732.5	20175		1.0	Right	QPSK	1	0	22.7		0.16	0.09	0.16
	1732.5	20175		1.0	Bottom	QPSK	1	0	22.7		0.52	0.00	0.52
	1732.5	20175		1.0	Back+HS	QPSK	1	0	22.7		0.97	0.11	0.97
	1732.5	20175		1.0	Back+ 2100mA	QPSK	1	0	22.7		0.91	0.17	0.91
LTE Band 4	1745.0	20300	Body-worn	1.5	Back	QPSK	1	99	23.8		0.69	-0.05	0.69
	1745.0	20300		Holster	Back	QPSK	1	99	23.8		0.32	0.01	0.32
	1745.0	20300		Holster	Front	QPSK	1	99	23.8		0.24	-0.04	0.24

Table 11.2-5a RFL111LW SAR results for LTE Band 4 (20MHz BW) body-worn and Hotspot configurations

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
											Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 4	1720.0	20050	Body Hotspot Mode	1.0	Back	QPSK	1	99					
	1732.5	20175		1.0	Back	QPSK	1	0	22.7		1.05	-0.12	1.05
	1732.5	20175		1.0	Back	QPSK	1	0	22.7	2 nd Scan	1.04	-0.08	1.04
	1745.0	20300		1.0	Back	QPSK	1	99					
LTE Band 4	1745.0	20300	Body-worn	1.5	Back	QPSK	1	99	23.8		0.71	-0.13	0.71


Table 11.2-5b RFP121LW SAR results for LTE Band 4 (20MHz BW) body-worn and Hotspot configurations

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD IV 1800 MHz	1712.4	1312	Body Hotspot Mode	1.0	Back	22.4	2 nd scan	1.08	0.06	1.08
	1712.4	1312		1.0	Back	22.4		1.06	0.00	1.06
	1732.6	1413		1.0	Back	22.3		1.01	0.00	1.01
	1752.6	1513		1.0	Back	22.6		1.06	0.16	1.06
	1712.4	1312		1.0	Front					
	1732.6	1413		1.0	Front	22.3		0.60	0.08	0.60
	1752.6	1513		1.0	Front					
	1732.6	1413		1.0	Left	22.3		0.37	0.08	0.37
	1732.6	1413		1.0	Right	22.3		0.10	0.02	0.10
	1732.6	1413		1.0	Bottom	22.3		0.62	0.00	0.62
	1712.4	1312		1.0	Back+HS	22.4		1.04	0.09	1.04
1712.4	1312	1.0	Back 2100mA	22.4	1.07	0.11	1.07			
WCDMA FDD IV 1800 MHz	1732.6	1413	Body-worn	1.5	Back	22.3		0.54	0.03	0.54
	1732.6	1413		Holster	Back	22.3		0.35	-0.06	0.35
	1732.6	1413		Holster	Front	22.3		0.27	0.18	0.27

Table 11.2-6 RFP121LW SAR results for WCDMA FDD IV body-worn and Hotspot configurations

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Mod.	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
											Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 2	1880	18900	Body Hotspot Mode	1.0	Back	QPSK	1	0	22.3	2 nd Scan	0.94	0.34	0.94
	1860	18700		1.0	Back	QPSK	1	0	22.3		0.97	0.07	0.97
	1900	19100		1.0	Back	QPSK	1	0	22.2		0.93	-0.05	0.93
	1880	18900		1.0	Back	QPSK	1	99	22.2		1.03	0.20	1.03
	1860	18700		1.0	Back	QPSK	1	99	22.2		0.88	-0.09	0.88
	1900	19100		1.0	Back	QPSK	1	99	22.1		1.15	-0.08	1.15
	1900	19100		1.0	Back	QPSK	1	99	22.1		1.10	0.08	1.10
	1880	18900		1.0	Back	QPSK	50	0	21.0		0.76	-0.20	0.76
	1860	18700		1.0	Back	QPSK	100	0	21.0		0.68	0.29	0.68
	1880	18900		1.0	Front	QPSK	1	99	22.2		0.61	0.22	0.61
	1880	18900		1.0	Left	QPSK	1	99	22.2		0.34	0.01	0.34
	1880	18900		1.0	Right	QPSK	1	99	22.2		0.15	-0.05	0.15
	1880	18900		1.0	Bottom	QPSK	1	99	22.2		0.79	0.02	0.79
	1880	18900		1.0	Back+HS	QPSK	1	99	22.2		0.94	-0.02	0.94
	LTE Band 2	1880		18900	Body-worn	1.5	Back	QPSK	1		99	22.2	
1880		18900	Holster	Back		QPSK	1	99	22.2		0.38	-0.12	0.38
1880		18900	Holster	Front		QPSK	1	99	22.2		0.23	0.29	0.23

Table 11.2-7a RFL111LW SAR results for LTE Band 2 (20MHz BW) body-worn and Hotspot configurations


		Document				Page			
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3				97(105)			
Author Data		Dates of Test		Test Report No		FCC ID:		IC	
Andrew Becker		Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		RTS-6026-1303-02 Rev 3		L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
										Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 2	1860	18700	Body	1.0	Back	QPSK	1	99				
	1880	18900	Hotspot	1.0	Back	QPSK	1	99				
	1900	19100	Mode	1.0	Back	QPSK	1	99	22.1	1.09	-0.11	1.09
LTE Band 2	1860	18700	Body-worn	1.0	Back	QPSK	1	99				
	1880	18900		1.0	Back	QPSK	1	99	22.2	0.54	-0.07	0.54
	1900	19100		1.0	Back	QPSK	1	99				

Table 11.2-7b RFL111LW SAR results for LTE Band 2 (20MHz BW) body-worn and Hotspot configurations 2100mA Battery

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Modulation	# of Resource Blocks	RB Offset	Conducted Output Power (dBm)	SAR, averaged over 1 g		
										Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
LTE Band 2	1880	18900	Body	1.0	Back	QPSK	1	0	23.2	0.97	-0.02	0.97
	1880	18900		1.0	Back	QPSK	1	50	23.1	1.00	-0.09	1.00
	1880	18900	Hotspot Mode	1.0	Back	QPSK	1	99	23.2	1.03	0.09	1.03
	1900	19100		1.0	Back	QPSK	1	0	23.2	1.01	0.03	1.01
LTE Band 2	1880	18900	Body-worn	1.5	Back	QPSK	1	99	23.2	0.58	0.16	0.58
	1880	18900		Holster	Back	QPSK	1	99				
	1880	18900		Holster	Front	QPSK	1	99				

Table 11.2-7c RFP121LW SAR results for LTE Band 2 (20MHz BW) body-worn and Hotspot configurations


		Document				Page			
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3				98(105)			
Author Data		Dates of Test		Test Report No		FCC ID:		IC	
Andrew Becker		Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		RTS-6026-1303-02 Rev 3		L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW	

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS/ EDGE 1900MHz	1850.2	512	Body Hotspot Mode	1.0	Back	28.4	2 nd Scan	1.04	-0.06	1.04
	1880.0	661		1.0	Back	28.5		1.03	-0.04	1.03
	1909.8	810		1.0	Back	28.4		1.08	-0.11	1.08
	1909.8	810		1.0	Back	28.4		1.01	-0.04	1.01
	1880.0	661		1.0	Front	28.5		0.64	0.16	0.64
	1880.0	661		1.0	Left	28.5		0.32	-0.07	0.32
	1880.0	661		1.0	Right	28.5		0.13	0.00	0.13
	1880.0	661		1.0	Bottom	28.5		0.75	-0.11	0.75
3-slots GPRS/ EDGE 1900MHz	1909.8	810	1.0	Back+HS	28.4	1.00	0.08	1.00		
4-slots GPRS/ EDGE 1900MHz	1909.8	810	1.0	Back	25.1	0.93	-0.17	0.93		
2-slots GPRS/ EDGE 1900MHz	1880.0	661	Body-worn	1.5	Back	28.5	0.52	-0.04	0.52	
	1880.0	661		Holster	Back	28.5	0.37	0.05	0.37	
	1880.0	661		Holster	Front	28.5	0.23	-0.06	0.23	

Table 11.2-8a SAR results for GPRS/EDGE 1900 body-worn and Hotspot configurations

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
2-slots GPRS/ EDGE 1900MHz	1850.2	512	Body Hotspot Mode	1.0	Back					
	1880.0	661		1.0	Back					
	1909.8	810		1.0	Back	28.4	1.21	-0.16	1.21	
	1909.8	810		1.0	Back	28.4	2 nd scan	1.12	-0.17	1.12
2-slots GPRS/ EDGE 1900MHz	1850.2	512	Body-worn	1.5	Back					
	1880.0	661		1.5	Back	28.5	0.62	0.10	0.62	
	1909.8	810		1.5	Back					

Table 11.2-8b SAR results for GPRS/EDGE 1900 body-worn and Hotspot configurations 2100mA Battery


		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			99(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC		
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW		

Mode	f (MHz)	Channel	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	SAR, averaged over 1 g		
							Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD II 1900 MHz	1852.4	9262	Body Hotspot Mode	1.0	Back	22.8	1.12	0.13	1.12
	1880.0	9400		1.0	Back	22.8	1.17	-0.07	1.17
	1907.6	9538		1.0	Back	22.8	1.28	0.02	1.28
	1880.0	9400		1.0	Front	22.8	0.70	0.06	0.70
	1880.0	9400		1.0	Left	22.8	0.34	0.02	0.34
	1880.0	9400		1.0	Right	22.8	0.15	0.08	0.15
	1880.0	9400		1.0	Bottom	22.8	0.74	0.04	0.74
	1907.6	9400		1.0	Back+HS	22.8	1.19	0.14	1.19
WCDMA FDD II 1900 MHz	1880.0	9400	Body-worn	1.5	Back	22.8	0.64	-0.12	0.64
	1880.0	9400		Holster	Back	22.8	0.44	0.25	0.44
	1880.0	9400		Holster	Front	22.8	0.28	-0.04	0.28

Table 11.2-9a SAR results for WCDMA FDD II body-worn and Hotspot configurations

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Scan Type	SAR, averaged over 1 g		
								Measured (W/kg)	Power Drift (dB)	*Extrapolated (W/kg)
WCDMA FDD II 1900 MHz	1852.4	9262	Body Hotspot Mode	1.0	Back	22.8				
	1880.0	9400		1.0	Back	22.8				
	1907.6	9538		1.0	Back	22.8		1.35	-0.12	1.35
	1907.6	9538		1.0	Back	22.8	2 nd scan	1.36	0.07	1.36
WCDMA FDD II 1900 MHz	1852.4	9262	Body-worn	1.5	Back	22.8				
	1880.0	9400		1.5	Back	22.8		0.65	0.16	0.65
	1907.6	9538		1.5	Back	22.8				

**Table 11.2-9b SAR results for WCDMA FDD II body-worn and Hotspot configurations
2100mA Battery**

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3				Page 100(105)
		Author Data Andrew Becker		Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		Test Report No RTS-6026-1303-02 Rev 3

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Measured SAR (W/kg)		
							Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11b/WLAN 2450 MHz	2437	6	Body Hotspot Mode	1.0	Front	19.9	0.11	0.11	0.06
	2437	6		1.0	Left	19.9	0.05	0.20	0.11
	2437	6		1.0	Right	19.9	0.30	0.08	0.04
	2437	6		1.0	Top	19.9	-0.10	0.22	0.12
802.11b/WLAN 2450 MHz	2437	6	Body-worn	1.5	Back	19.9	0.23	0.31	0.16
	2437	6		Holster	Back	19.9	0.12	0.25	0.14
	2437	6		Holster	Front	19.9	0.06	0.05	0.03


Table 11.2-10a RFL111LW SAR results for WiFi/WLAN/802.11b body-worn and Hotspot configurations (Rev2-01)

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Measured SAR (W/kg)		
							Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11b/WLAN 2450 MHz	2437	6	Body Hotspot Mode	1.0	Back	18.0	0.03	0.48	0.22
	2437	6		1.0	Back+HS	18.0	0.07	0.34	0.15
	2437	6		1.0	Back+ 2100mA Batt	18.0	0.00	0.48	0.22

Table 11.2-10b RFL111LW SAR results for WiFi/WLAN/802.11b body-worn and Hotspot configurations (Rev3-03)

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Extrapolated SAR (W/kg)		
							Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11b/WLAN 2450 MHz	2437	6	Body Hotspot Mode	1.0	Back	19.5	0.03	0.68	0.31
	2437	6		1.0	Back+HS	19.5	0.07	0.48	0.21
	2437	6		1.0	Back+ 2100mA Batt	19.5	0.00	0.68	0.31

Table 11.2-10c RFL111LW SAR results for WiFi/WLAN/802.11b body-worn and Hotspot configurations (Rev3-04)

		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			101(105)	
Author Data	Dates of Test		Test Report No	FCC ID:		IC
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014		RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW		2503A-RFL110LW 2503A-RFP120LW

Mode	f (MHz)	Ch	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Measured SAR (W/kg)		
							Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11b/WLAN 2450MHz	2412	1	Body	1.0	Back				
	2437	6	Hotspot	1.0	Back	18.0	-0.12	0.53	0.25
	2462	11	Mode	1.0	Back				
802.11b/WLAN 2450 MHz	2437	6	Body-worn	1.5	Back	18.0	-0.01	0.25	0.13
	2437	6		Holster	Back				
	2437	6		Holster	Front				


Table 11.2-10d RFP121LW SAR results for WiFi/WLAN/802.11b body-worn and Hotspot configurations

Mode	f (MHz)	Ch	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Measured SAR (W/kg)		
							Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Bluetooth 2450 MHz	2441	39	Body Hotspot Mode	1.0	Back	10.2	0.03	0.00	0.00
	2441	39		1.0	Front				
	2441	39		1.0	Left				
	2441	39		1.0	Right				
	2441	39		1.0	Top	10.2	-0.10	0.00	0.00
Bluetooth 2450 MHz	2441	39	Body-worn	1.5	Back	10.2	-0.23	0.00	0.00
	2441	39		Holster	Back				
	2441	39		Holster	Front				

Table 11.2-11a RFL111LW SAR results for Bluetooth body-worn and Hotspot configurations

Mode	f (MHz)	Ch.	Test Position	Spacing (cm)/ Holster	Side	Conducted Output Power (dBm)	Measured SAR (W/kg)		
							Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
Bluetooth 2450MHz	2441	39	Body Hotspot Mode	1.0	Back	10.2	0.36	0.00	0.00
Bluetooth 2450 MHz	2441	39	Body-worn	1.5	Back	10.2	0.17	0.00	0.00

Table 11.2-11b RFP121LW SAR results for Bluetooth body-worn and Hotspot configurations


		Document			Page	
		SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			102(105)	
Author Data	Dates of Test	Test Report No	FCC ID:	IC		
Andrew Becker	Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	RTS-6026-1303-02 Rev 3	L6ARFL110LW L6ARFP120LW	2503A-RFL110LW 2503A-RFP120LW		

Mode	Freq. (MHz)	Channel	Holster type / device configuration	Conducted Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11a 5000 MHz	5180	36	No Holster, back side 15 mm away	13.2	0.43	0.24	0.09
	5320	64	No Holster, back side 15 mm away	13.6	0.61	0.19	0.07
	5520	104	No Holster, back side 15 mm away	11.9	0.00	0.08	0.03
	5745	149	No Holster, back side 15 mm away	10.9	0.49	0.18	0.07
	5180	36	Vertical Holster, back side facing	13.2	0.17	0.06	0.02
	5180	36	Vertical Holster, front side facing	13.2	0.62	0.01	0.00
	5180	36	No Holster, HS, back side 15mm away	13.2	0.28	0.18	0.07

**Table 11.2-12a RFL111LW SAR results for 802.11a body-worn configurations
(Rev3-03)**

Mode	Freq. (MHz)	Channel	Holster type / device configuration	Conducted Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11a 5000 MHz	5180	36	No Holster, back side 15 mm away	13.2	0.07	0.24	0.09

**Table 11.2-12b RFL111LW SAR results for 802.11a body-worn configurations
2100mA Battery (Rev3-03)**


		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 103(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Mode	Freq. (MHz)	Channel	Holster type / device configuration	Conducted Output Power (dBm)	Extrapolated SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11a 5000 MHz	5180	36	No Holster, back side 15 mm away	13.4	0.43	0.25	0.09
	5300	60	No Holster, back side 15 mm away	14.9	0.61	0.30	0.11
	5520	104	No Holster, back side 15 mm away	16.8	0.00	0.25	0.09
	5745	149	No Holster, back side 15 mm away	12.0	0.49	0.23	0.09
	5180	36	Vertical Holster, back side facing	13.4	0.17	0.06	0.02
	5180	36	Vertical Holster, front side facing	13.4	0.62	0.01	0.00
	5180	36	No Holster, HS, back side 15mm away	13.4	0.28	0.18	0.07

**Table 11.2-12b RFL111LW SAR results for 802.11a body-worn configurations
(Rev3-04)**


Mode	Freq. (MHz)	Channel	Holster type / device configuration	Conducted Output Power (dBm)	Measured SAR (W/kg)		
					Power Drift (dB)	Extrapolated SAR Averaged over 1 g	Extrapolated SAR Averaged over 10 g
802.11a 5000 MHz	5180	36	No Holster, back side 15 mm away	13.2	0.10	0.23	0.08

Table 11.2-12d RFP121LW SAR results for 802.11a body-worn configurations

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3			Page 104(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW	

Measured/Extrapolated SAR Values - Hotspot - 802.11a 5000-6000 MHz								
Ch.	Freq. (MHz)	spacing (cm)/holster	Side Facing Phantom	Cond. Output Power (dBm)		Power Drift (dB)	1g SAR (W/Kg)	
				Declared	Measured		Extrapolated	Reported
36*	5180	1.0	Back	13.5	13.1	0.28	0.53	0.58
40	5200	1.0	Back					0.00
44	5220	1.0	Back					0.00
48*	5240	1.0	Back					0.00
<hr/>								
149*	5745	1.0	Back	12.0	12.0	0.24	0.43	0.43
153	5765	1.0	Back					0.00
157*	5785	1.0	Back					0.00
161	5805	1.0	Back					0.00
165*	5825	1.0	Back					0.00
<hr/>								
36*	5180	1.0	Front	13.5	13.1	0.39	0.02	0.02
36*	5180	1.0	Left	13.5	13.1	0.06	0.05	0.06
36*	5180	1.0	Right					0.00
36*	5180	1.0	Top	13.5	13.1	0.05	0.11	0.12

Table 11.2-11e SAR results for 802.11a Hotspot configurations

		Document SAR Compliance Test Report for the BlackBerry® Smartphone Model RFP121LW Rev 3		Page 105(105)
Author Data Andrew Becker	Dates of Test Nov 22, 2012, Feb 28-Mar 26, 2013 Mar 26 – 28, Dec. 10-12, 2014	Test Report No RTS-6026-1303-02 Rev 3	FCC ID: L6ARFL110LW L6ARFP120LW	IC 2503A-RFL110LW 2503A-RFP120LW

12.0 REFERENCES

- [1] DASY 5 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL, Schmid & Partner Engineering AG.
- [2] FCC 47 CRF Part 2.1093, Radiofrequency radiation exposure evaluation: portable devices. June 18, 2014.
- [3] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.
- [4] Health Canada, Safety Code 6, 2009: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency range from 3 kHz to 300 GHz.
- [5] IEEE C95.1-1992, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- [6] IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- [7] IEEE 1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [8] KDB 248227 D01 v01r02, May 2007: FCC OET SAR Measurement Procedures for 802.11 a/b/g Transmitters.
- [9] KDB 447498 D01 v05r02, Feb 2014: FCC OET Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.
- [10] KDB 648474 D04 v01r02, Dec 2013: FCC OET SAR Evaluation Considerations for Wireless Handsets.
- [11] KDB 865664 D01 v01r03, Feb 2014: FCC OET SAR Measurement Requirements for 100 MHz to 6 GHz.
- [12] KDB 865664 D02 v01r01, May 2013: FCC OET RF Exposure Compliance Reporting and Documentation Considerations.
- [13] KDB 941225 D01 v03r00, Oct 2014: FCC OET 3G SAR Measurement Procedures.
- [14] KDB 941225 D05 v02r03, Dec 2013: FCC OET SAR Evaluation Considerations for LTE Devices.
- [15] KDB 941225 D05A v01r01, Aug 2014: FCC OET Rel.10 LTE SAR Test Guidance and KDB Inquires.
- [16] KDB 941225 D06 v02r00, Oct 2014: FCC OET SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities.
- [17] 3GPP TS 36.521-1 V10.0.0 (2011-12): Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification; Radio transmission and reception; Part 1: Conformance testing.
- [18] RSS-102, issue 4-2010: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada’s Safety Code 6 for Exposure of Humans to Radio Frequency Fields.
- [19] ICNIRP, International Commission on Non-Ionizing Radiation Protection (2009), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).
- [20] IEC 62209-1, First Edition-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).
- [21] IEC 62209-2, Edition 1.0-2010: Human exposure to radio frequency fields from hand-held and body-mount wireless communication devices – Human Models, instrumentation, and procedures - part 2 - procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).