

# FCC DFS Test Report

Tested in accordance with  
Federal Communications Commission (FCC)  
Personal Communications Services  
CFR 47, Parts 15.407



**A division of BlackBerry Limited**

**REPORT NO.:** RTS-6046-1308-10A


**PRODUCT MODEL NO.:** RFX101LW, RGB141LW  
**TYPE NAME:** BlackBerry® smartphone  
**FCC ID:** L6ARFX100LW, L6ARGB141LW

**DATE:** August 23, 2013

**RTS is accredited  
according to  
EN ISO/IEC 17025 by:**



**592**

 DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141LW		
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

**Statement of Performance:**

The BlackBerry® smartphone, model RFX101LW, part number CER-54735-001 Rev1-x04-00 and accessories perform within the requirements of the test standards when configured and operated per Blackberry’s operation instructions.

The BlackBerry® smartphone, model RGB141LW, part number CER-56897-001 Rev1-x04-00 and accessories perform within the requirements of the test standards when configured and operated per Blackberry’s operation instructions.

**Declaration:**

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer’s published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:


Reviewed by:

\_\_\_\_\_  
 Savtej S. Sandhu  
 Regulatory Compliance Specialist

\_\_\_\_\_  
 Forhad Hasnat  
 Regulatory Compliance Specialist


Reviewed and Approved by:

\_\_\_\_\_  
 Masud S. Attayi, P.Eng.  
 Manager, Regulatory Compliance

	DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141LW	
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

## Table of Contents

A.	Scope .....	4
B.	Associated Documents .....	4
C.	Product Identification .....	4
D.	Support Equipment Used for the Testing of the EUT .....	5
E.	Test Results Chart – FCC Part 15, Client Device .....	6
F.	Summary of Result .....	6
G.	Compliance Test Equipment Used .....	7
APPENDIX 1 - DFS TEST PLOTS and DATA.....		8

		DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141LW
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

## A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15.407, October, 2012

## B. Associated Documents

1. BlackBerry\_System\_Similarity\_Declaration\_RFX101LW\_RGB141LW\_Rev5.doc

## C. Product Identification


Manufactured by BlackBerry Limited whose headquarters is located at:

295 Phillip Street  
Waterloo, Ontario  
Canada, N2L 3W8  
Phone: 519 888 7465  
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following location:

RTS Test Facility:  
440 Phillip Street  
Waterloo, Ontario  
Canada, N2L 5R9  
Phone: 519 888 7465  
Fax: 519 888 6906

The testing was performed on July 11, 15 and 29, 2013.

		DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141LW
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

BlackBerry® smartphone Samples Tested

SAMPLE	MODEL	CER NUMBER	PIN	SOFTWARE
1	RFX101LW	CER-54735-001 Rev1-x04-00	333E2860	10.2.0.519

DFS testing was performed on sample 1.

As per manufacture's BlackBerry\_System\_Similarity\_Declaration\_RFX101LW\_RGB141LW\_Rev5, there is no retesting impact applicable. Changes between RFX101LW and RGB141LW did not impact the measurements in this report.

The manufacturer declared modes for the EUT operational characteristics that affect DFS are as follows:

**Operating Modes (5250 -5350 MHz, 5470-5725MHz)**


- Master Device
- Client Device (no In-Service Monitoring, no Ad – Hoc mode)
- Client Device with In-Service Monitoring

**Channel Protocol**

- IP Based
- Frame Based
- Other \_\_\_\_\_

**D. Support Equipment Used for the Testing of the EUT**

Manufacturer	Description	Model	Serial Number	FCC ID and IC
Cisco	Access Point	AIR-RM1252G-A-K9	FCW1336Z03R	LDK102061/2 2461B-102061/2
Lenovo	Laptop	8742-C2U	L3-B3615 07/06	MCLJ07H081 2878D-J07H081
D-Link	Router	WBR-1310	P10317B010096	KA2WBR1310 4216A-WBR1310

		DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141LW
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

### E. Test Results Chart – FCC Part 15, Client Device

SPECIFICATION	TEST TYPE	Meets Requirement	Test Data APPENDIX
FCC CFR 47			
Part 15.407	Channel closing transmission time	Yes	1
Part 15.407	Channel move time	Yes	1
Part 15.407	Non-occupancy period - associated	Yes	1

### F. Summary of Result


The following tests were performed on model RFX101LW.

- a). The BlackBerry® smartphone met the requirement of the Channel Closing Transmission and Time, Channel Move time and Non-occupancy period requirement as per FCC 15.407. The measurement was performed on Channel 52 (5260 MHz) of the DFS band. Radar Type 1 of the Short Pulse Test waveform was used for tests.

See APPENDIX 1 for the test data.

Measurement Uncertainties:

Measurement	Measurement Unit	Expanded Uncertainty
DFS Threshold (Conducted)	dBm	1.2

		DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141LW
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

### G. Compliance Test Equipment Used


<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE (YY MM DD)</u>	<u>USE</u>
Spectrum Analyzer	Rohde & Schwarz	FSV	101820	13-11-21	DFS
DFS RF Modulator	National Instruments	PXIe-5611	EC157C	14-02-25	DFS
DFS I/Q Signal Generator	National Instruments	PXIe-5450	EC6BB1	14-02-25	DFS
DFS RF Signal Generator	National Instruments	PXIe-5620	ED2167	14-02-25	DFS
T/RH Meter	OMEGA	iTHX-SD	0380564	13-10-30	DFS

### H. Test Software used

<u>SOFTWARE</u>	<u>COMPANY</u>	<u>VERSION</u>	<u>USE</u>
iDFTest	Redwolf	2.5	DFS

## APPENDIX 1 - DFS TEST PLOTS and DATA




	DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141	
	<b>APPENDIX 1</b>	
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

### DFS Conducted Test Results

#### DFS Test Methods

##### Conducted Test Method

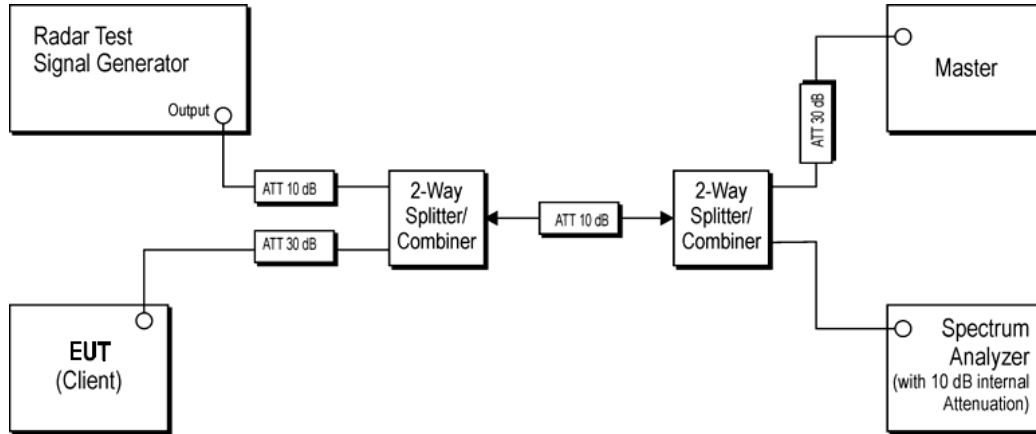

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
10dB Attenuator	Aeroflex Weinschel	3330A-10	-
30dB Attenuator	Aeroflex Weinschel	3330A-30	-
2-Way Splitter	Weinschel	1515	QC170
2-Way Splitter	Weinschel	1534	221

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the Channel Closing Transimission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel Move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.



<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW
---	---	---

DFS Conducted Test Results Cont'd

Radar Waveforms

FCC Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Detection Percentage	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

FCC Long Pulse Radar Test Waveforms							
Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µs)	Number of Pulses per Burst	Number of Bursts	Minimum Detection Percentage	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Frequency Hopping Radar Test Waveforms							
Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Detection Percentage	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

	DFS Test Report for the BlackBerry® smartphone Model RFX101LW, RGB141	
	<b>APPENDIX 1</b>	
<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW

### DFS Conducted Test Results Cont'd

The following tests were performed on model RFX101LW.


The following tests were performed by Heng Lin

Date of the test: July 11, 15 and 29, 2013

The environmental conditions were: Temperature: 23.6 – 24.7 °C  
Humidity: 22.9 – 49.5 %

Wave form Type	Channel Closing Transmission Time		Channel Move Time		Result
	Measured	Limit	Measured	Limit	
Radar Type 1	26.09 ms	260 ms	3.32 s	10 s	PASS


### Channel Closing Transmission Time

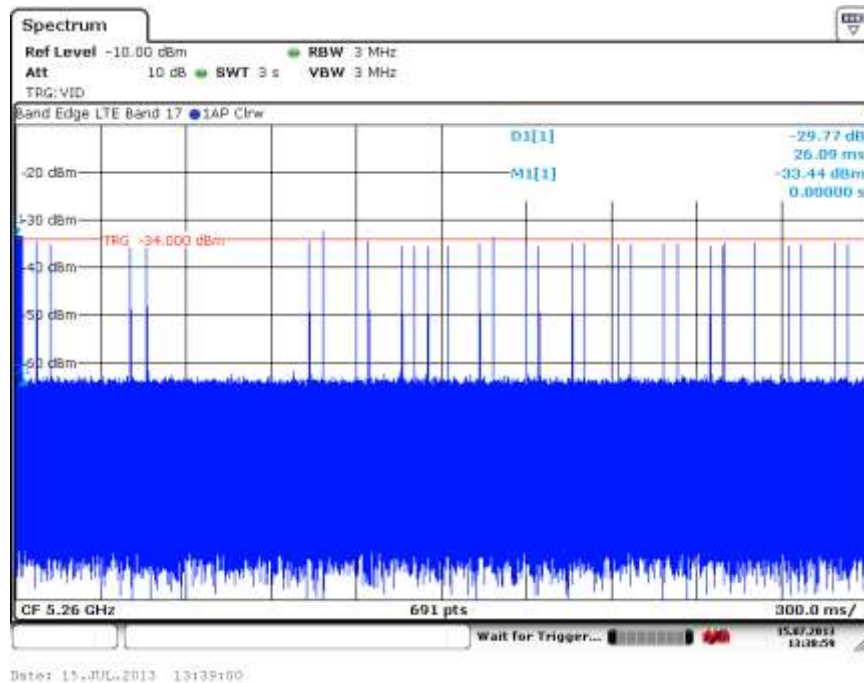

<b>Test Report No.</b> RTS-6046-1308-10A	<b>Date of Test</b> July 11, 15 and 29, 2013	<b>FCC ID:</b> L6ARFX100LW, L6ARGB140LW
---	---	---

DFS Conducted Test Results Cont'd

Channel Move Time

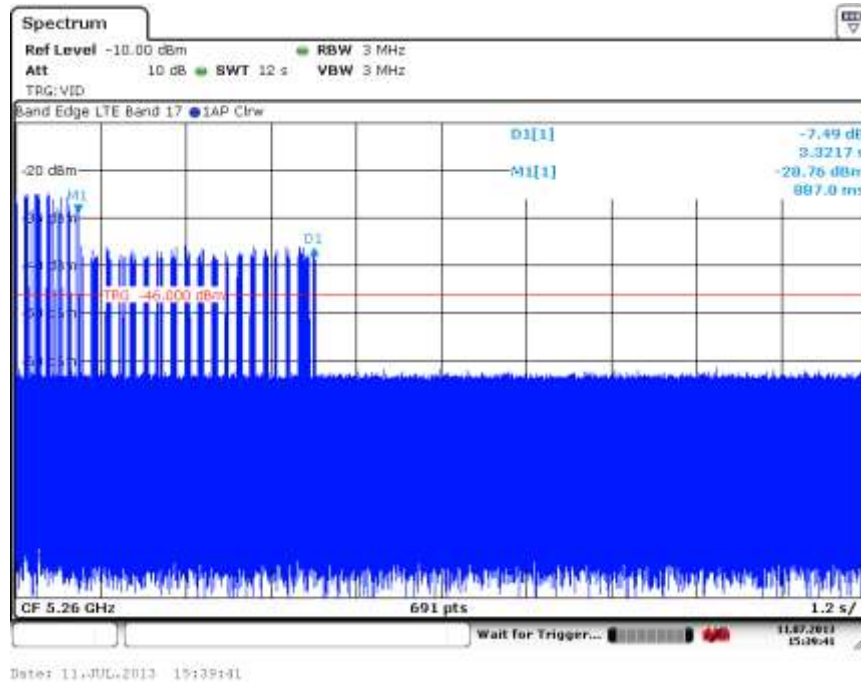

Non-Occupancy Period ≥ 30 min.

