
		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		1(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

**APPENDIX B: SAR DISTRIBUTION PLOTS FOR EACH CONFIGURATION PART 3 of 3
(2300 – 5000 MHz)**

Note: Model RHM181LW was tested using the external lab CETECOM ICT Services GmbH. Information regarding the SAR test results and procedures for model: RHM181LW were taken from the CETECOM SAR test report for model RHM181LW, report number 1-0042/15-01-15-A

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 2(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

LTE Band 7

Test report no.: 1-0042/15-01-15-A	
------------------------------------	---

Annex B.9: LTE FDD 7


Date/Time: 04.08.2015 10:27:16

IEEE1528_EN62209-LTE FDD 7 head

DUT: Blackberry; Type: RHM181LW; Serial: 1161466952
 Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 7 (2600MHz); Frequency: 2510 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.798$ S/m; $\epsilon_r = 38.156$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASY5
 DASY5 Configuration:
 - Probe: EX3DV4 - SN3944; ConvF(7.33, 7.33, 7.33); Calibrated: 19.08.2014;
 - Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 - Electronics: DAE3 Sn477; Calibrated: 22.05.2015
 - Phantom: SAM; Type: SAM; Serial: 1043
 - DASY52 52.8.7(1137); SEMCAD X 14.6, 10(7164)

Right-Hand-Side HSL - 20MHz BW - QPSK - slider open/Touch Position - Low 1RB - 0RB offset/Area Scan (121x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 0.355 W/kg

Right-Hand-Side HSL - 20MHz BW - QPSK - slider open/Touch Position - Low 1RB - 0RB offset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 13.924 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.422 W/kg
 SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.130 W/kg
 Maximum value of SAR (measured) = 0.335 W/kg

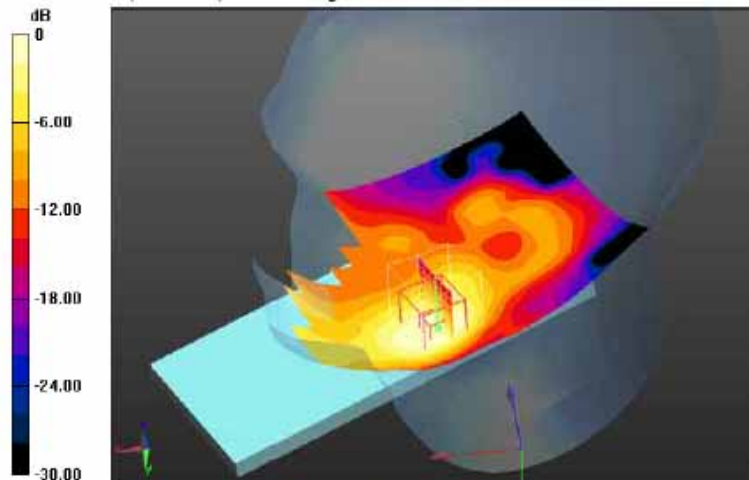

Additional information:
 ambient temperature: 22.8°C; liquid temperature: 21.4°C

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 3(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Test report no.: 1-0042/15-01-15-A


Date/Time: 05.09.2015 22:38:18

FCC_EN62209-2 LTE FDD 7 hotspot

DUT: Blackberry; Type: RHM181LW; Serial: 1161466951
 Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 7 (2600MHz); Frequency: 2560 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.155$ S/m; $\epsilon_r = 51.096$; $\rho = 1000$ kg/m³
 Phantom section: Center Section
 Measurement Standard: DASYS5
 DASYS5 Configuration:
 - Probe: EX3DV4 - SN3944; ConvF(7.37, 7.37, 7.37); Calibrated: 14.08.2015;
 - Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 31.0
 - Electronics: DAE3 Sn413; Calibrated: 15.01.2015
 - Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
 - DASYS2 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL-10mm - 20MHz BW - QPSK - 1RB slider open/Bottom 0RB offset
High/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.16 W/kg

MSL-10mm - 20MHz BW - QPSK - 1RB slider open/Bottom 0RB offset
High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 22.102 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 1.52 W/kg
 SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.364 W/kg
 Maximum value of SAR (measured) = 1.15 W/kg

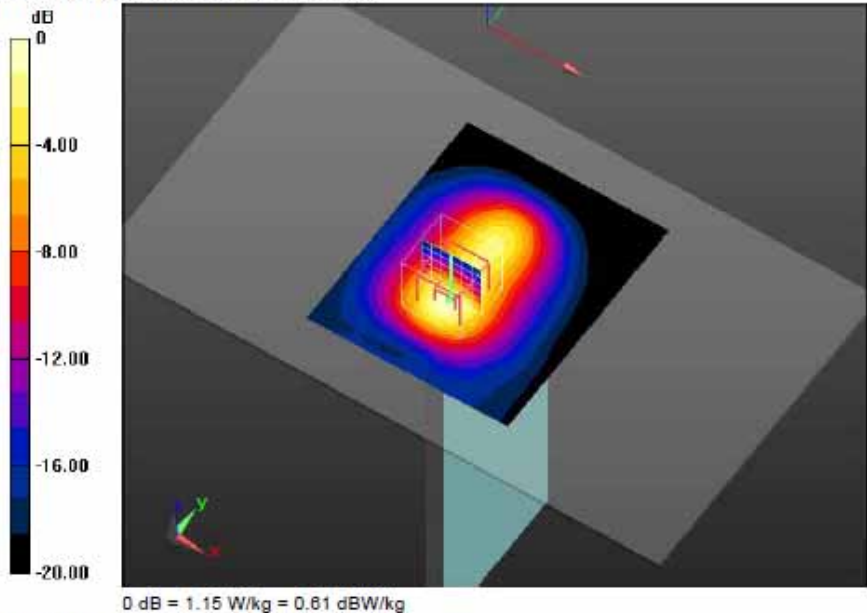

0 dB = 1.15 W/kg = 0.61 dBW/kg

Additional information:
 position or distance of DUT to the phantom: 10 mm
 ambient temperature: 23.0°C; liquid temperature: 22.6°C

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 4(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Test report no.: 1-0042/15-01-15-A

Date/Time: 04.09.2015 10:39:04

FCC_EN62209-2 LTE FDD 7 body worn


DUT: Blackberry; Type: RHM181LW; Serial: 1161466951
 Communication System: UID 0, LTE FDD (0); Communication System Band: LTE 7 (2600MHz); Frequency: 2510 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2510 \text{ MHz}$; $\sigma = 2.11 \text{ S/m}$; $\epsilon_r = 51.299$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section
 Measurement Standard: DASYS
 DASYS Configuration:
 - Probe: EX3DV4 - SN3944; ConvF(7.37, 7.37, 7.37); Calibrated: 14.08.2015;
 - Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 - Electronics: DAE3 Sn413; Calibrated: 15.01.2015
 - Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
 - DASYS52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL-15mm - 20MHz BW - QPSK - 1RB/Rear 0RB offset Low/Area Scan

(121x221x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.523 W/kg

MSL-15mm - 20MHz BW - QPSK - 1RB/Rear 0RB offset Low/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 18.192 V/m; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 0.715 W/kg
 SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.196 W/kg
 Maximum value of SAR (measured) = 0.538 W/kg

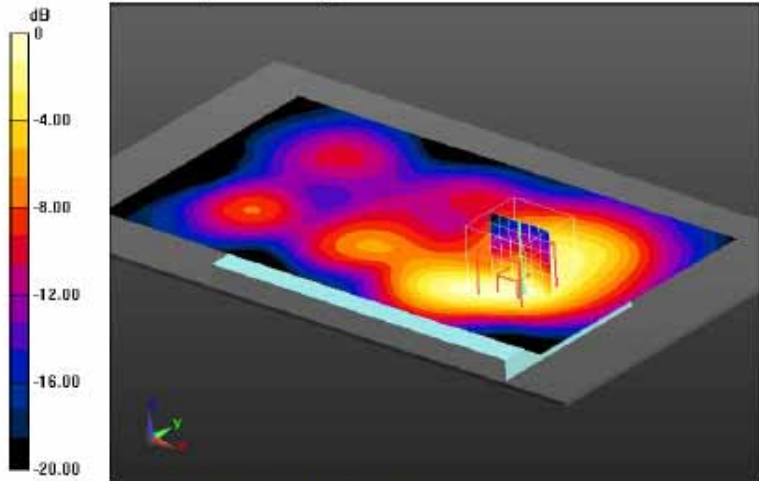

0 dB = 0.538 W/kg = -2.69 dBW/kg

Additional information:
 position or distance of DUT to the phantom: 15 mm
 ambient temperature: 23.0°C; liquid temperature: 22.6°C

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS, a division of BlackBerry Limited, Copyright 2005-2015

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 5(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Bluetooth

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - Bluetooth - Slider Closed

Communication System: Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: $f=2441$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 37.458$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - Bluetooth - Slider Closed/Touch Position -

Bluetooth_chan39_amb_temp_22.7C_liq_temp_23.9C/Area Scan (131x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.340 V/m; **Power Drift = 0.029 dB**

Fast SAR: SAR(1g) = 0.0116 W/kg; SAR(10g) = 0.00618 W/kg

Maximum value of SAR (interpolated) = 0.0149 W/kg

Right-Hand-Side HSL - Bluetooth - Slider Closed/Touch Position -

Bluetooth_chan39_amb_temp_22.7C_liq_temp_23.9C/Zoom Scan (36x36x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.340 V/m; **Power Drift = 0.029 dB**

Averaged SAR: SAR(1g) = 0.0110 W/kg; SAR(10g) = 0.00523 W/kg


Maximum value of SAR (interpolated) = 0.0197 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

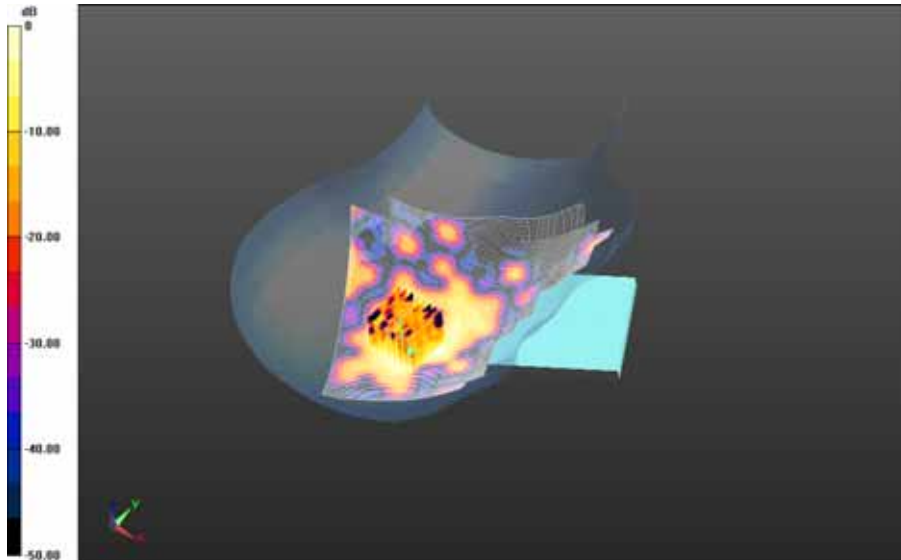

0 dB = 0.0126 W/kg = -19.00 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 7(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Right-Hand-Side HSL - Bluetooth - Slider Closed/Tilt Position -
Bluetooth_chan39_amb_temp_22.6C_liq_temp_23.9C/Area Scan (151x181x1):** Interpolated
grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 1.230 V/m; **Power Drift = -0.096 dB**


Fast SAR: SAR(1g) = 0.00409 W/kg; SAR(10g) = 0.00205 W/kg
Maximum value of SAR (interpolated) = 0.00563 W/kg

**Right-Hand-Side HSL - Bluetooth - Slider Closed/Tilt Position -
Bluetooth_chan39_amb_temp_22.6C_liq_temp_23.9C/Zoom Scan (31x46x36)/Cube 0:**
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 1.230 V/m; **Power Drift = -0.096 dB**

Averaged SAR: SAR(1g) = 0.00355 W/kg; SAR(10g) = 0.00159 W/kg
Maximum value of SAR (interpolated) = 0.00750 W/kg

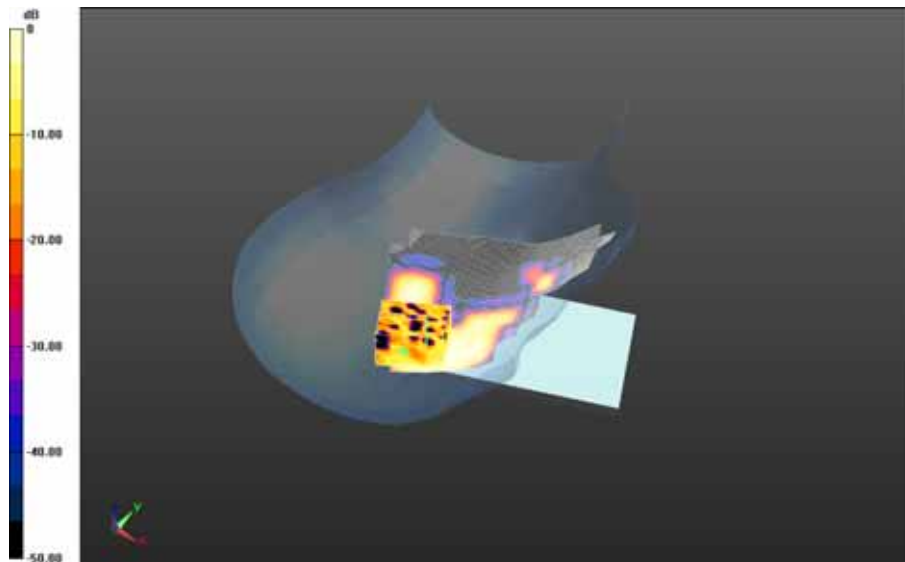

0 dB = 0.00517 W/kg = -22.87 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		8(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - Bluetooth - Slider Closed

Communication System: Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: f=2441 MHz; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 37.458$; $\rho = 1.000 \text{ g/cm}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - Bluetooth - Slider Closed/Touch Position -

Bluetooth_chan39_amb_temp_23.7C_liq_temp_22.6C/Area Scan (151x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.575 V/m; **Power Drift = 0.094 dB**

Fast SAR: SAR(1g) = 0.00467 W/kg; SAR(10g) = 0.00240 W/kg

Maximum value of SAR (interpolated) = 0.0108 W/kg

Left-Hand-Side HSL - Bluetooth - Slider Closed/Touch Position -

Bluetooth_chan39_amb_temp_23.7C_liq_temp_22.6C/Zoom Scan (36x41x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.575 V/m; **Power Drift = 0.094 dB**

Averaged SAR: SAR(1g) = 0.00427 W/kg; SAR(10g) = 0.00200 W/kg


Maximum value of SAR (interpolated) = 0.0173 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

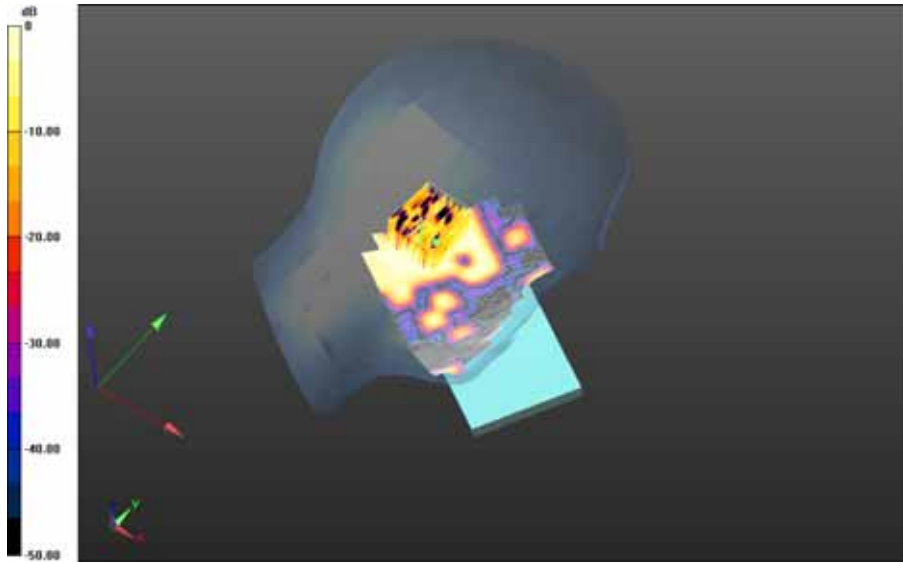

0 dB = 0.00526 W/kg = -22.79 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		10(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - Bluetooth - Slider Open

Communication System: Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: f=2441 MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 37.458$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - Bluetooth - Slider Open/Touch Position -

Bluetooth_chan39_amb_temp_23.7C_liq_temp_22.7C/Area Scan (151x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 0.497 V/m; **Power Drift = -0.056 dB**

Fast SAR: SAR(1g) = 0.00854 W/kg; SAR(10g) = 0.00446 W/kg

Maximum value of SAR (interpolated) = 0.0106 W/kg

Right-Hand-Side HSL - Bluetooth - Slider Open/Touch Position -

Bluetooth_chan39_amb_temp_23.7C_liq_temp_22.7C/Zoom Scan (36x36x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 0.497 V/m; **Power Drift = -0.056 dB**

Averaged SAR: SAR(1g) = 0.00894 W/kg; SAR(10g) = 0.00437 W/kg


Maximum value of SAR (interpolated) = 0.0187 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

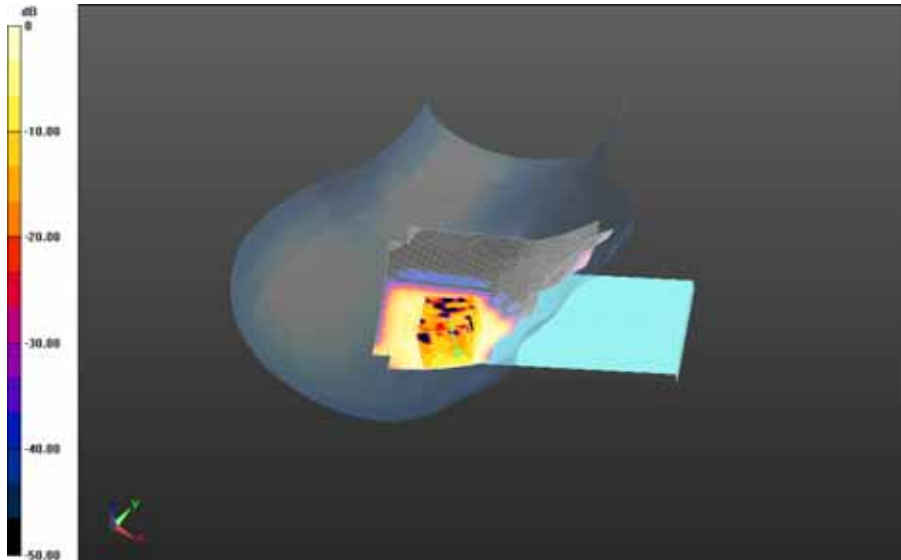

0 dB = 0.0114 W/kg = -19.43 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		12(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Mobile Hot Spot MSL - Bluetooth - Slider Closed

Communication System: Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: $f=2441$ MHz; $\sigma = 2.007$ S/m; $\epsilon_r = 50.608$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - Bluetooth - Slider Closed/10mm Device Back -

Bluetooth_chan39_amb_temp_24.1C_liq_temp_22.5C/Area Scan (151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.325 V/m; **Power Drift = -0.153 dB**

Fast SAR: SAR(1g) = 0.0172 W/kg; SAR(10g) = 0.00735 W/kg


Maximum value of SAR (interpolated) = 0.0304 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

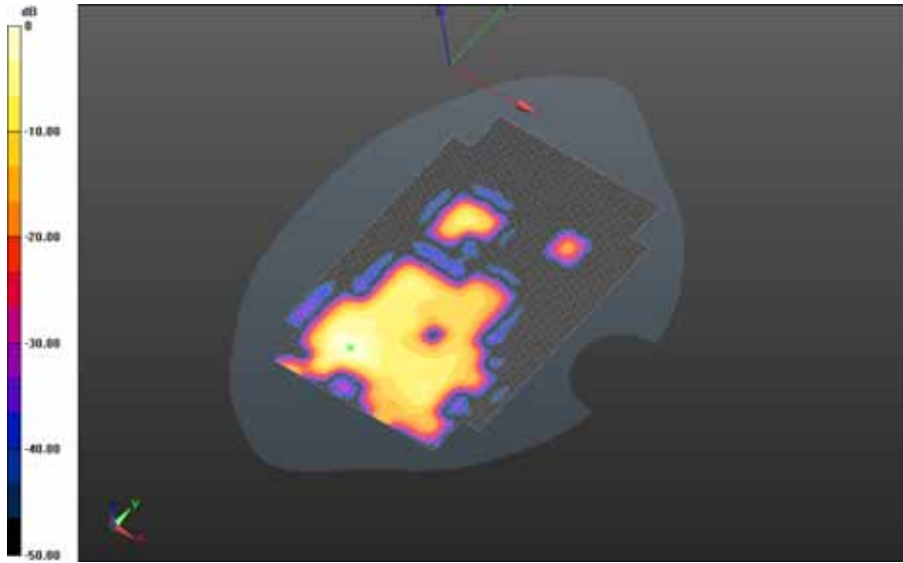

0 dB = 0.0304 W/kg = -15.17 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		14(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Mobile Hot Spot MSL - Bluetooth - Slider Open

Communication System: Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: f=2441 MHz; $\sigma = 2.007$ S/m; $\epsilon_r = 50.608$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - Bluetooth - Slider Open/10mm Device Back -

Bluetooth_chan39_amb_temp_24.0C_liq_temp_22.5C/Area Scan (151x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.175 V/m; **Power Drift = 0.228 dB**

Fast SAR: SAR(1g) = 0.0174 W/kg; SAR(10g) = 0.00885 W/kg

Maximum value of SAR (interpolated) = 0.0232 W/kg

Mobile Hot Spot MSL - Bluetooth - Slider Open/10mm Device Back -

Bluetooth_chan39_amb_temp_24.0C_liq_temp_22.5C/Zoom Scan (36x36x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.175 V/m; **Power Drift = 0.228 dB**

Averaged SAR: SAR(1g) = 0.0187 W/kg; SAR(10g) = 0.00865 W/kg


Maximum value of SAR (interpolated) = 0.0911 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

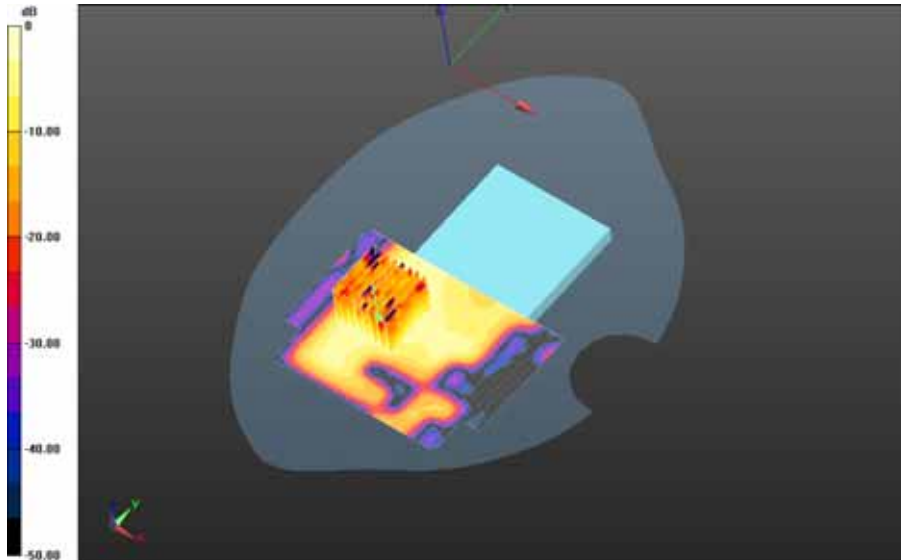

0 dB = 0.0251 W/kg = -16.00 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		16(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Body Worn MSL - Bluetooth - Slider Closed

Communication System: Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: f=2441 MHz; $\sigma = 2.007$ S/m; $\epsilon_r = 50.608$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - Bluetooth - Slider Closed/15mm Device Back -

Bluetooth_chan39_amb_temp_24.0C_liq_temp_22.4C/Area Scan (151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 0.575 V/m; **Power Drift = 0.168 dB**

Fast SAR: SAR(1g) = 0.00885 W/kg; SAR(10g) = 0.00369 W/kg

Maximum value of SAR (interpolated) = 0.0150 W/kg

Body Worn MSL - Bluetooth - Slider Closed/15mm Device Back -

Bluetooth_chan39_amb_temp_24.0C_liq_temp_22.4C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 0.575 V/m; **Power Drift = 0.168 dB**

Averaged SAR: SAR(1g) = 0.00652 W/kg; SAR(10g) = 0.00288 W/kg


Maximum value of SAR (interpolated) = 0.0171 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

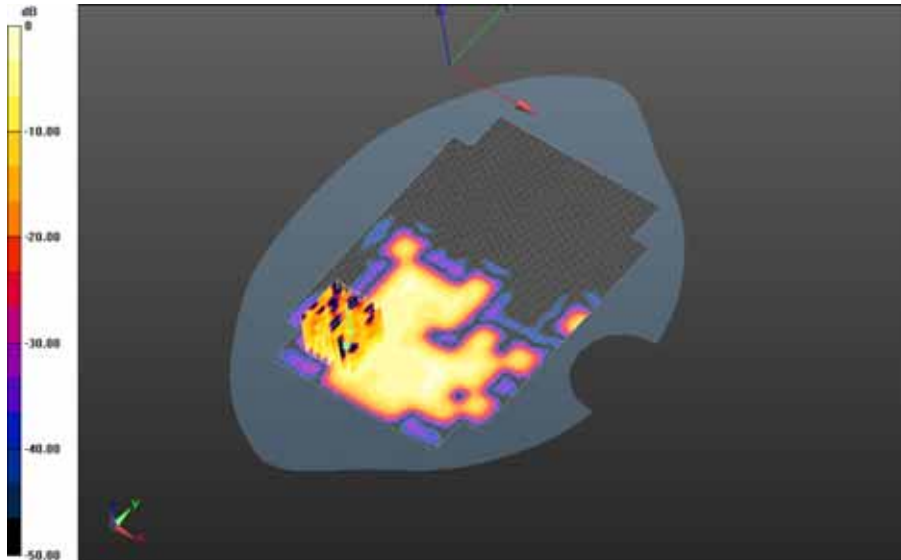

0 dB = 0.00874 W/kg = -20.58 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 18(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

802.11b

(Primary Antenna_Core 0)

Date: 9/4/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11b_Slider Closed

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: $f=2412$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 37.574$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan1_amb_temp_23.7C_liq_temp_22.7C/Area Scan (91x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 3.072 V/m; **Power Drift = -0.082 dB**

Fast SAR: SAR(1g) = 0.0827 W/kg; SAR(10g) = 0.0428 W/kg

Maximum value of SAR (interpolated) = 0.107 W/kg

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan1_amb_temp_23.7C_liq_temp_22.7C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 3.072 V/m; **Power Drift = -0.082 dB**

Averaged SAR: SAR(1g) = 0.0796 W/kg; SAR(10g) = 0.0381 W/kg


Maximum value of SAR (interpolated) = 0.169 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

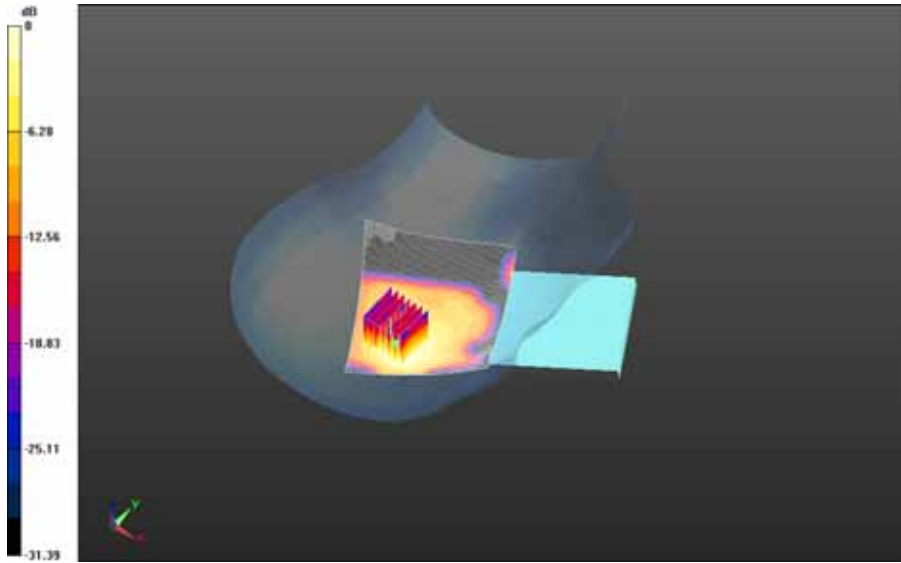

0 dB = 0.0890 W/kg = -10.51 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 20(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position - 802.11b_chan6_amb_temp_23.8C_liq_temp_22.7C/Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 3.528 V/m; **Power Drift = 0.194 dB**


Fast SAR: SAR(1g) = 0.108 W/kg; SAR(10g) = 0.0554 W/kg
Maximum value of SAR (interpolated) = 0.141 W/kg

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position - 802.11b_chan6_amb_temp_23.8C_liq_temp_22.7C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 3.528 V/m; **Power Drift = 0.194 dB**

Averaged SAR: SAR(1g) = 0.114 W/kg; SAR(10g) = 0.0562 W/kg
Maximum value of SAR (interpolated) = 0.231 W/kg

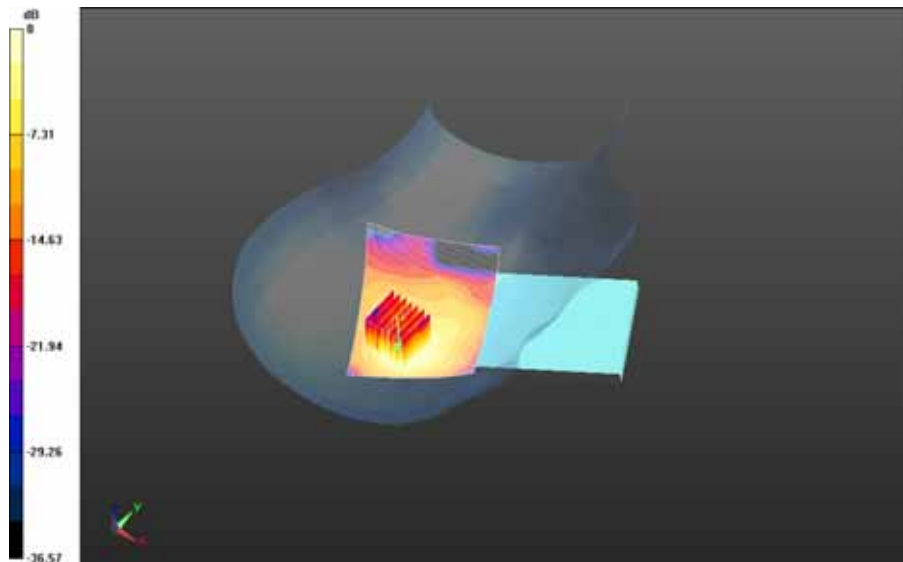

0 dB = 0.127 W/kg = -8.96 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		21(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position - 802.11b_chan11_amb_temp_23.7C_liq_temp_23.1C/Area Scan (131x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 5.118 V/m; **Power Drift = 0.094 dB**


Fast SAR: SAR(1g) = 0.184 W/kg; SAR(10g) = 0.0939 W/kg
Maximum value of SAR (interpolated) = 0.243 W/kg

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position - 802.11b_chan11_amb_temp_23.7C_liq_temp_23.1C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 5.118 V/m; **Power Drift = 0.094 dB**

Averaged SAR: SAR(1g) = 0.199 W/kg; SAR(10g) = 0.0967 W/kg
Maximum value of SAR (interpolated) = 0.408 W/kg

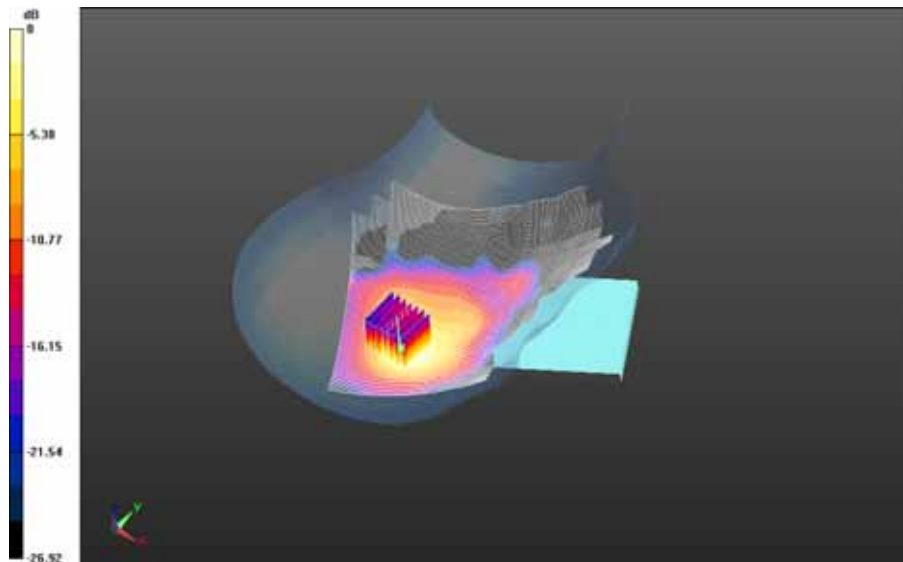

0 dB = 0.222 W/kg = -6.54 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		22(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Right-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position - 802.11b_chan11_amb_temp_23.7C_liq_temp_22.8C/Area Scan (151x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 5.289 V/m; **Power Drift = -0.089 dB**


Fast SAR: SAR(1g) = 0.142 W/kg; SAR(10g) = 0.0661 W/kg
Maximum value of SAR (interpolated) = 0.194 W/kg

Right-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position - 802.11b_chan11_amb_temp_23.7C_liq_temp_22.8C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 5.289 V/m; **Power Drift = -0.089 dB**

Averaged SAR: SAR(1g) = 0.154 W/kg; SAR(10g) = 0.0707 W/kg
Maximum value of SAR (interpolated) = 0.329 W/kg

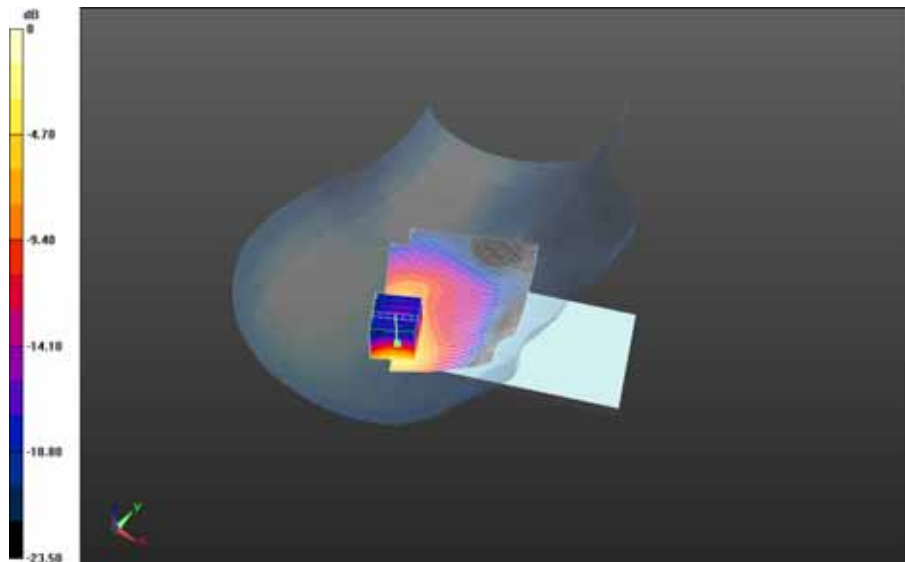

0 dB = 0.205 W/kg = -6.88 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		23(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/6/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11b_Slider Closed

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2462 MHz

Medium Parameters used: $f=2462$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 37.380$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan11_amb_temp_23.7C_liq_temp_22.8C/Area Scan (151x101x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 6.989 V/m; **Power Drift = 0.101 dB**

Fast SAR: SAR(1g) = 0.0865 W/kg; SAR(10g) = 0.0468 W/kg

Maximum value of SAR (interpolated) = 0.110 W/kg

Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan11_amb_temp_23.7C_liq_temp_22.8C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 6.989 V/m; **Power Drift = 0.101 dB**

Averaged SAR: SAR(1g) = 0.0847 W/kg; SAR(10g) = 0.0460 W/kg


Maximum value of SAR (interpolated) = 0.154 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

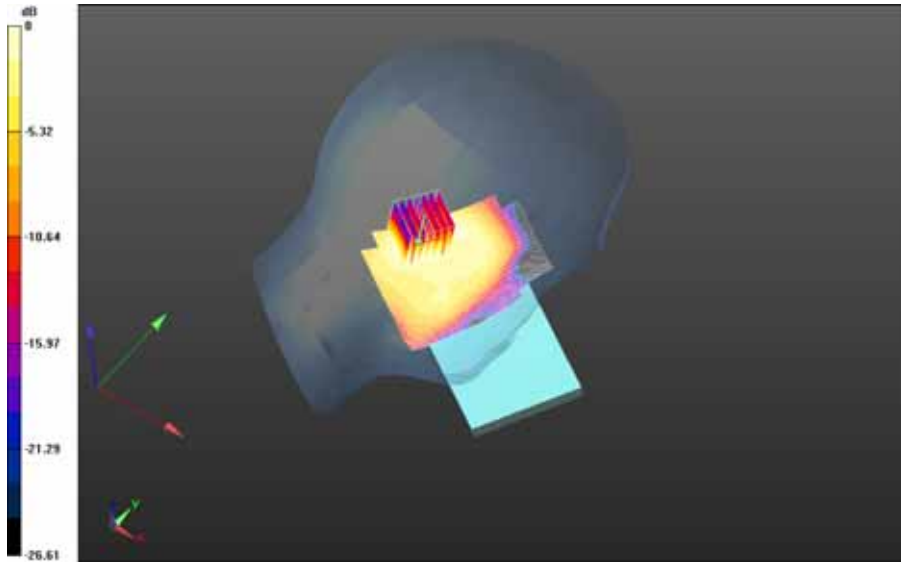

0 dB = 0.106 W/kg = -9.75 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 25(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position -
802.11b_chan11_amb_temp_23.9C_liq_temp_22.9C/Area Scan (81x101x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 6.576 V/m; **Power Drift = -0.125 dB**


Fast SAR: SAR(1g) = 0.0718 W/kg; SAR(10g) = 0.0374 W/kg
Maximum value of SAR (interpolated) = 0.0925 W/kg

**Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position -
802.11b_chan11_amb_temp_23.9C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0:**
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 6.576 V/m; **Power Drift = -0.125 dB**

Averaged SAR: SAR(1g) = 0.0711 W/kg; SAR(10g) = 0.0366 W/kg
Maximum value of SAR (interpolated) = 0.137 W/kg

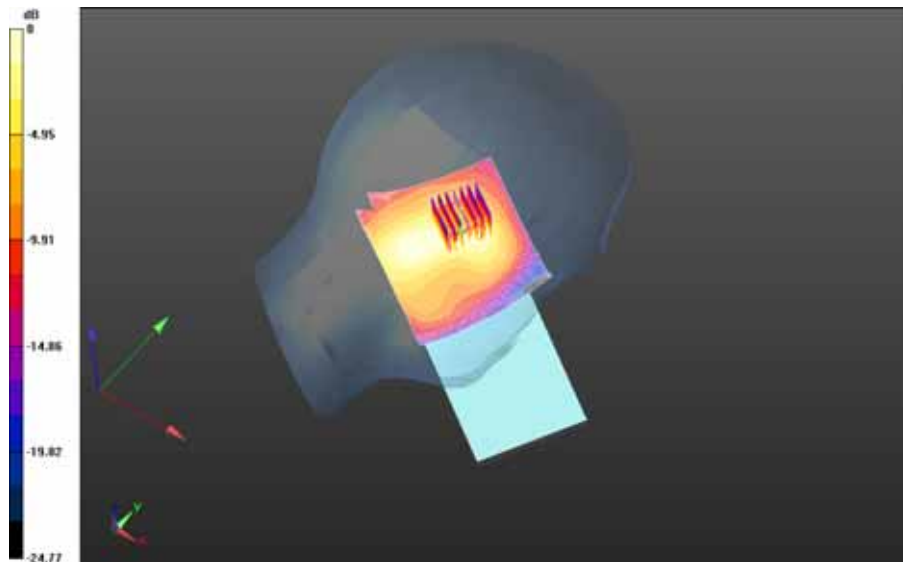

0 dB = 0.0805 W/kg = -10.94 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		26(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/4/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11b_Slider Open

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2462 MHz

Medium Parameters used: $f=2462$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 37.380$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan11_amb_temp_23.7C_liq_temp_23.0C/Area Scan (151x181x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 3.856 V/m; **Power Drift = 0.184 dB**

Fast SAR: SAR(1g) = 0.174 W/kg; SAR(10g) = 0.0921 W/kg

Maximum value of SAR (interpolated) = 0.217 W/kg

Right-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan11_amb_temp_23.7C_liq_temp_23.0C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 3.856 V/m; **Power Drift = 0.184 dB**

Averaged SAR: SAR(1g) = 0.182 W/kg; SAR(10g) = 0.0941 W/kg


Maximum value of SAR (interpolated) = 0.358 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

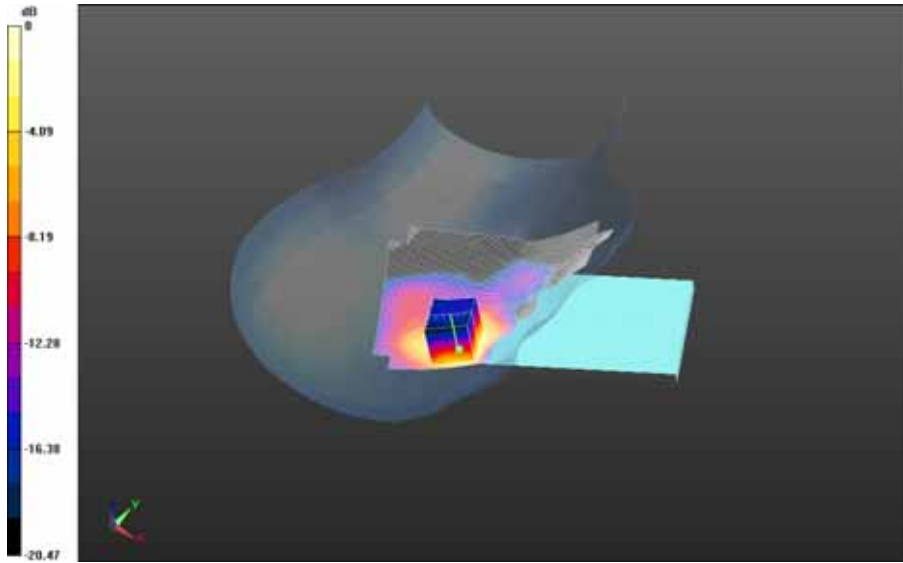

0 dB = 0.236 W/kg = -6.27 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 28(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Right-Hand-Side HSL - 802.11b_Slider Open/Tilt Position - 802.11b_chan11_amb_temp_23.8C_liq_temp_23.0C/Area Scan (151x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Reference Value = 5.156 V/m; **Power Drift = 0.075 dB**


Fast SAR: SAR(1g) = 0.0618 W/kg; SAR(10g) = 0.0326 W/kg
 Maximum value of SAR (interpolated) = 0.0798 W/kg

Right-Hand-Side HSL - 802.11b_Slider Open/Tilt Position - 802.11b_chan11_amb_temp_23.8C_liq_temp_23.0C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
 Reference Value = 5.156 V/m; **Power Drift = 0.075 dB**

Averaged SAR: SAR(1g) = 0.0662 W/kg; SAR(10g) = 0.0356 W/kg
 Maximum value of SAR (interpolated) = 0.118 W/kg

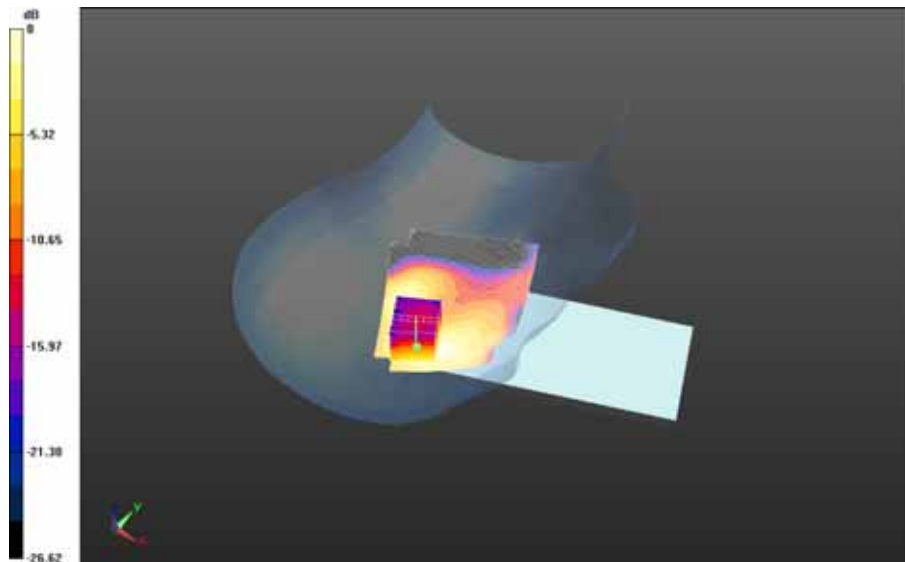

0 dB = 0.0817 W/kg = -10.88 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		29(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/4/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11b_Slider Open

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2462 MHz

Medium Parameters used: $f=2462$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 37.380$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan11_amb_temp_23.8C_liq_temp_22.8C/Area Scan (151x81x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 5.507 V/m; **Power Drift = -0.038 dB**

Fast SAR: SAR(1g) = 0.178 W/kg; SAR(10g) = 0.0912 W/kg

Maximum value of SAR (interpolated) = 0.229 W/kg

Left-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan11_amb_temp_23.8C_liq_temp_22.8C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 5.507 V/m; **Power Drift = -0.038 dB**

Averaged SAR: SAR(1g) = 0.172 W/kg; SAR(10g) = 0.0904 W/kg


Maximum value of SAR (interpolated) = 0.316 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

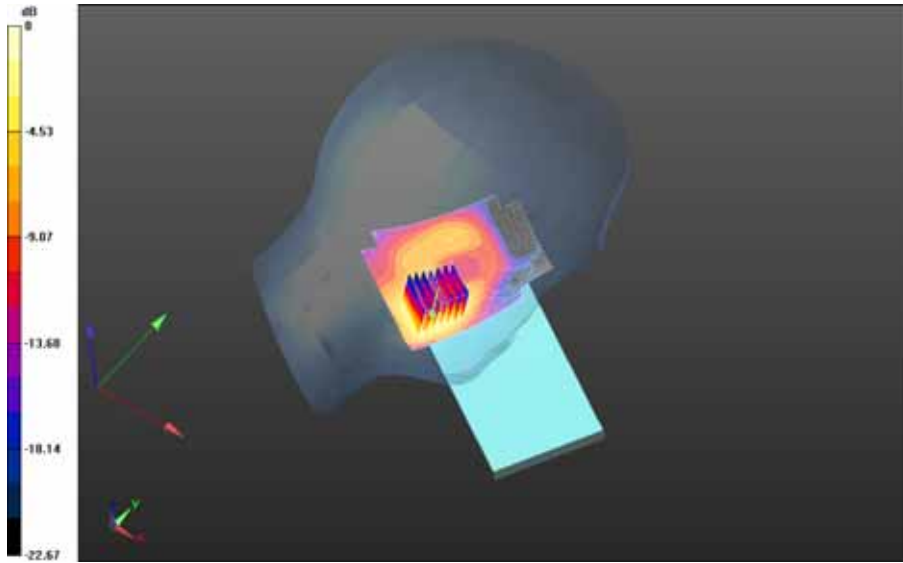

0 dB = 0.214 W/kg = -6.70 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 31(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Left-Hand-Side HSL - 802.11b_Slider Open/Tilt Position - 802.11b_chan11_amb_temp_23.7C_liq_temp_22.8C/Area Scan (151x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 6.806 V/m; **Power Drift = 0.032 dB**


Fast SAR: SAR(1g) = 0.0769 W/kg; SAR(10g) = 0.0371 W/kg
Maximum value of SAR (interpolated) = 0.101 W/kg

Left-Hand-Side HSL - 802.11b_Slider Open/Tilt Position - 802.11b_chan11_amb_temp_23.7C_liq_temp_22.8C/Zoom Scan (36x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 6.806 V/m; **Power Drift = 0.032 dB**

Averaged SAR: SAR(1g) = 0.0784 W/kg; SAR(10g) = 0.0379 W/kg
Maximum value of SAR (interpolated) = 0.161 W/kg

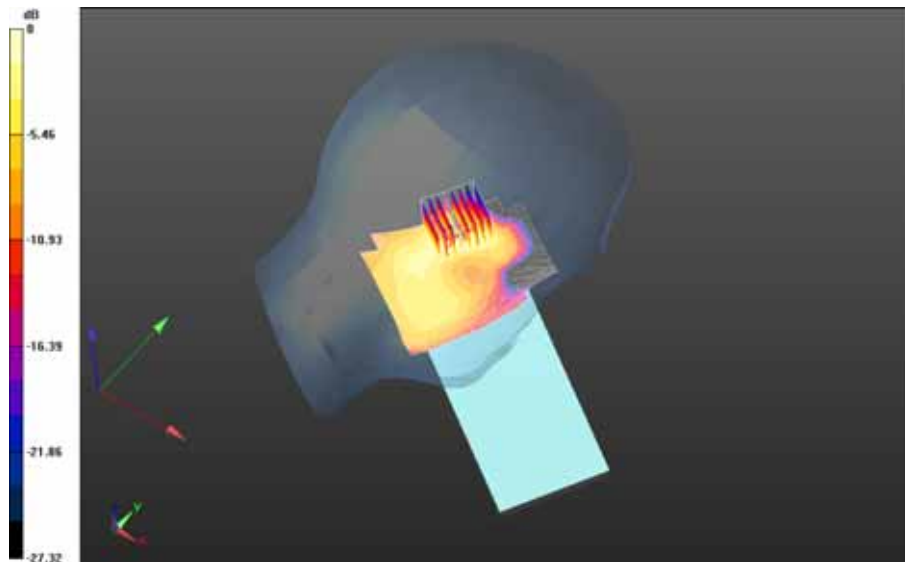

0 dB = 0.103 W/kg = -9.87 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		32(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/15/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Mobile Hot Spot MSL - 802.11b_Slider Closed

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2462 MHz

Medium Parameters used: $f=2462$ MHz; $\sigma = 2.034$ S/m; $\epsilon_r = 50.309$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Back -

802.11b_chan11_amb_temp_23.5C_liq_temp_22.7C/Area Scan (81x81x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 1.978 V/m; **Power Drift = -0.159 dB**

Fast SAR: SAR(1g) = 0.0323 W/kg; SAR(10g) = 0.0153 W/kg

Maximum value of SAR (interpolated) = 0.0432 W/kg

Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Back -


802.11b_chan11_amb_temp_23.5C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 1.978 V/m; **Power Drift = -0.159 dB**


Averaged SAR: SAR(1g) = 0.0327 W/kg; SAR(10g) = 0.0149 W/kg

Maximum value of SAR (interpolated) = 0.0712 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 33(164)
Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

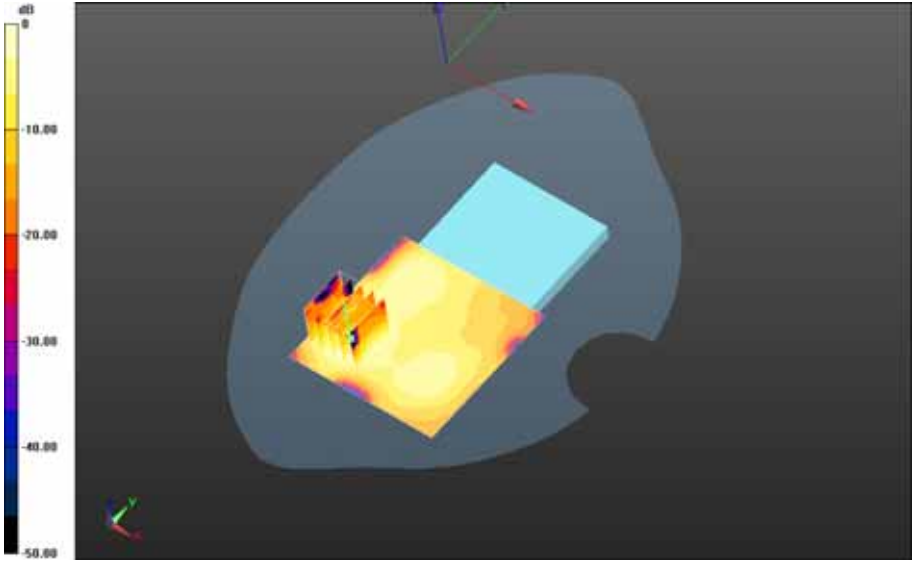

0 dB = 0.0385 W/kg = -14.15 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 34(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Front -
802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Area Scan (81x81x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 1.195 V/m; **Power Drift = -0.149 dB**


Fast SAR: SAR(1g) = 0.00690 W/kg; SAR(10g) = 0.00371 W/kg
Maximum value of SAR (interpolated) = 0.00866 W/kg

**Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Front -
802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Zoom Scan (21x21x36)/Cube 0:**
Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 1.195 V/m; **Power Drift = -0.149 dB**

Averaged SAR: SAR(1g) = 0.00714 W/kg; SAR(10g) = 0.00365 W/kg
Maximum value of SAR (interpolated) = 0.0201 W/kg

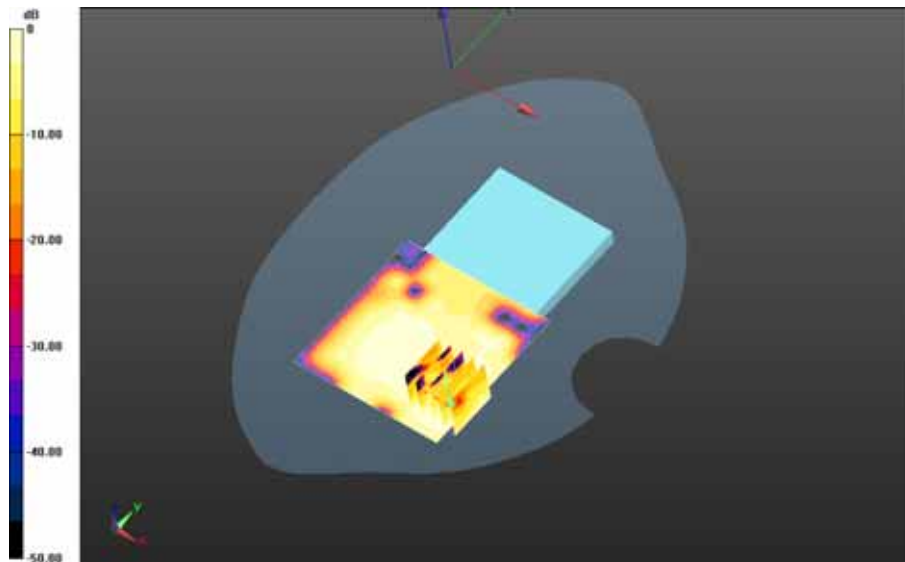

0 dB = 0.00825 W/kg = -20.84 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 35(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Left -
802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Area Scan (151x201x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 2.056 V/m; **Power Drift = 0.038 dB**


Fast SAR: SAR(1g) = 0.0143 W/kg; SAR(10g) = 0.00663 W/kg
Maximum value of SAR (interpolated) = 0.0193 W/kg

**Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Left -
802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Zoom Scan (21x21x36)/Cube 0:**
Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 2.056 V/m; **Power Drift = 0.038 dB**

Averaged SAR: SAR(1g) = 0.0137 W/kg; SAR(10g) = 0.00606 W/kg
Maximum value of SAR (interpolated) = 0.0251 W/kg

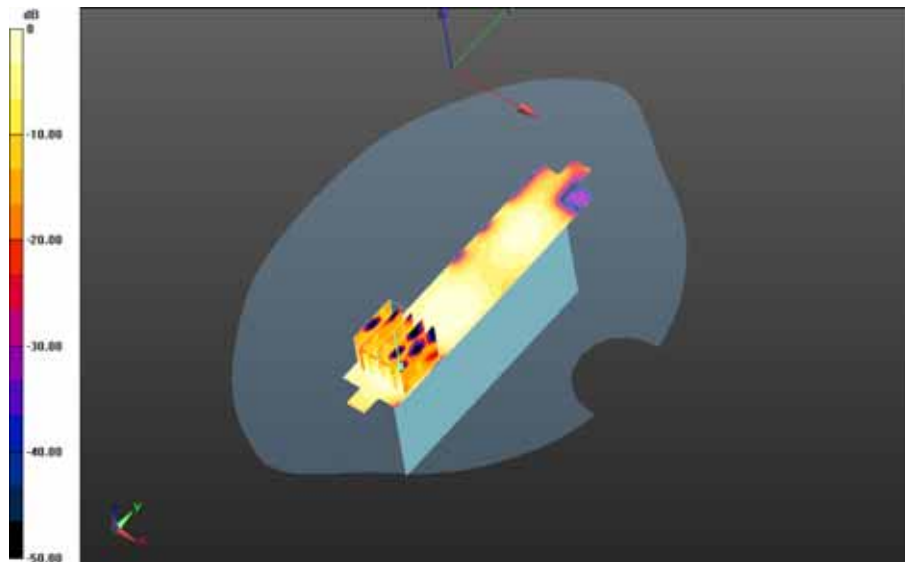

0 dB = 0.0157 W/kg = -18.04 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		36(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/16/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Mobile Hot Spot MSL - 802.11b_Slider Open

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: $f=2412$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 50.453$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back -

802.11b_chan1_amb_temp_23.4C_liq_temp_22.6C/Area Scan (81x81x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 2.194 V/m; **Power Drift = -0.164 dB**

Fast SAR: SAR(1g) = 0.0269 W/kg; SAR(10g) = 0.0130 W/kg

Maximum value of SAR (interpolated) = 0.0373 W/kg

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back -

802.11b_chan1_amb_temp_23.4C_liq_temp_22.6C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 2.194 V/m; **Power Drift = -0.164 dB**

Averaged SAR: SAR(1g) = 0.0278 W/kg; SAR(10g) = 0.0126 W/kg


Maximum value of SAR (interpolated) = 0.0619 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

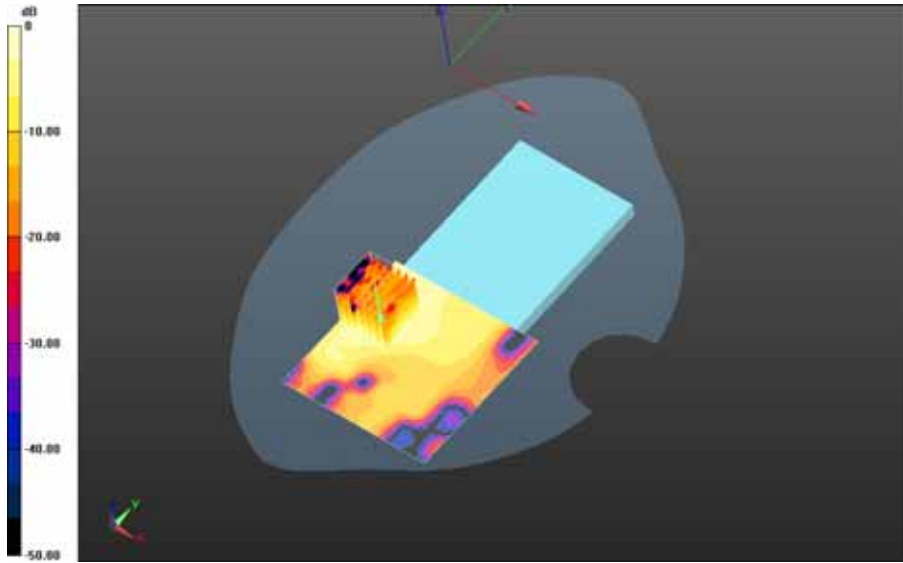

0 dB = 0.0373 W/kg = -14.28 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		38(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back - 802.11b_chan6_amb_temp_23.7C_liq_temp_22.7C/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 2.305 V/m; **Power Drift = 0.00683 dB**


Fast SAR: SAR(1g) = 0.0342 W/kg; SAR(10g) = 0.0163 W/kg
Maximum value of SAR (interpolated) = 0.0472 W/kg

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back - 802.11b_chan6_amb_temp_23.7C_liq_temp_22.7C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 2.305 V/m; **Power Drift = 0.00683 dB**

Averaged SAR: SAR(1g) = 0.0344 W/kg; SAR(10g) = 0.0158 W/kg
Maximum value of SAR (interpolated) = 0.0755 W/kg

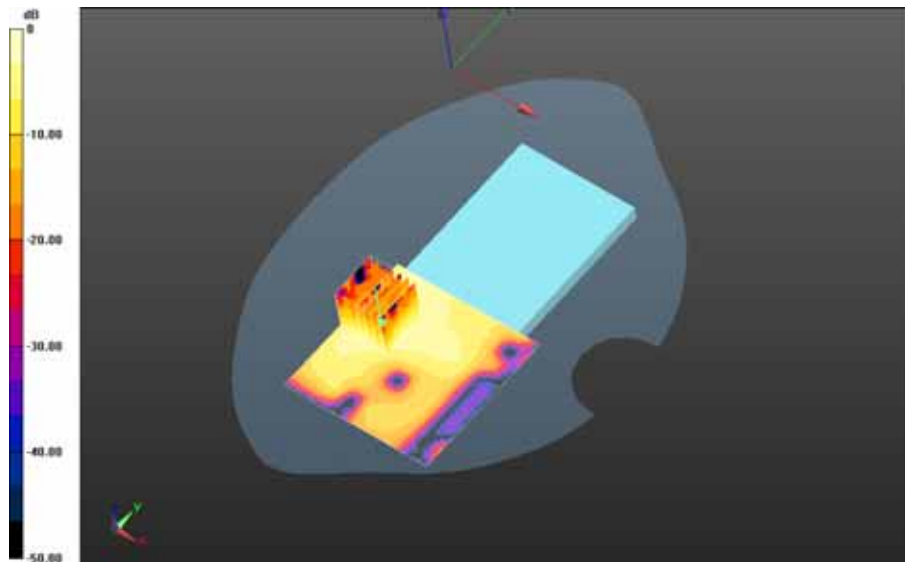

0 dB = 0.0453 W/kg = -13.44 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 39(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back - 802.11b_chan11_amb_temp_24.0C_liq_temp_22.8C/Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Reference Value = 2.621 V/m; **Power Drift = -0.00644 dB**


Fast SAR: SAR(1g) = 0.0422 W/kg; SAR(10g) = 0.0203 W/kg
 Maximum value of SAR (interpolated) = 0.0570 W/kg

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back - 802.11b_chan11_amb_temp_24.0C_liq_temp_22.8C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
 Reference Value = 2.621 V/m; **Power Drift = -0.00644 dB**

Averaged SAR: SAR(1g) = 0.0432 W/kg; SAR(10g) = 0.0198 W/kg
 Maximum value of SAR (interpolated) = 0.0973 W/kg

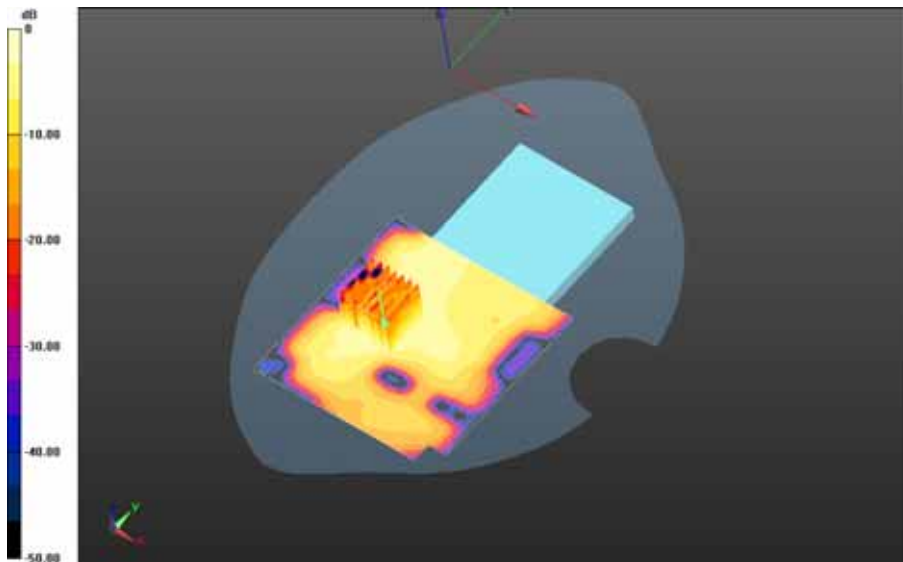

0 dB = 0.0571 W/kg = -12.43 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		40(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Front - 802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 1.164 V/m; **Power Drift = 0.086 dB**


Fast SAR: SAR(1g) = 0.00931 W/kg; SAR(10g) = 0.00511 W/kg
Maximum value of SAR (interpolated) = 0.0114 W/kg

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Front - 802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Zoom Scan (31x36x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 1.164 V/m; **Power Drift = 0.086 dB**

Averaged SAR: SAR(1g) = 0.00922 W/kg; SAR(10g) = 0.00491 W/kg
Maximum value of SAR (interpolated) = 0.0173 W/kg

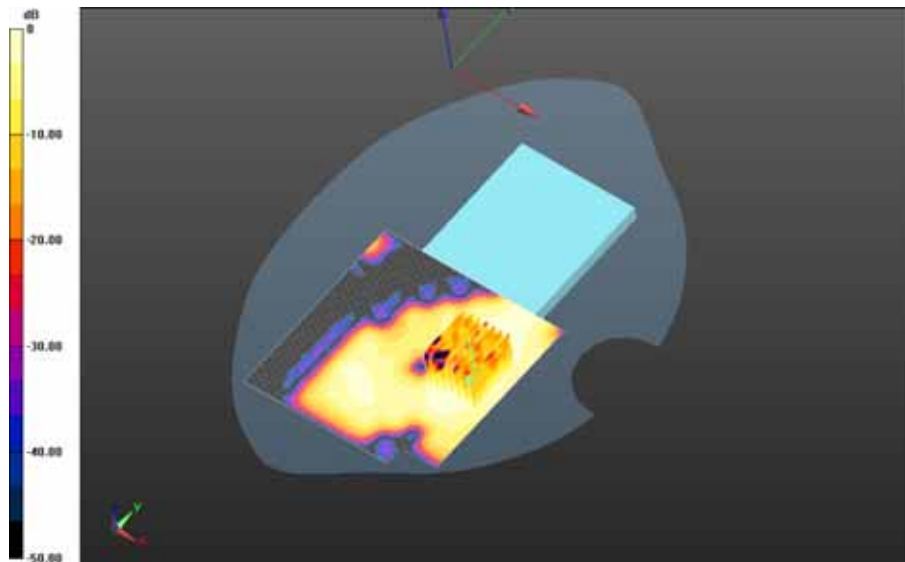


0 dB = 0.0119 W/kg = -19.24 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 41(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Left -
802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Area Scan (151x201x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 4.225 V/m; **Power Drift = 0.00474 dB**

Fast SAR: SAR(1g) = 0.0263 W/kg; SAR(10g) = 0.0138 W/kg
Maximum value of SAR (interpolated) = 0.0331 W/kg

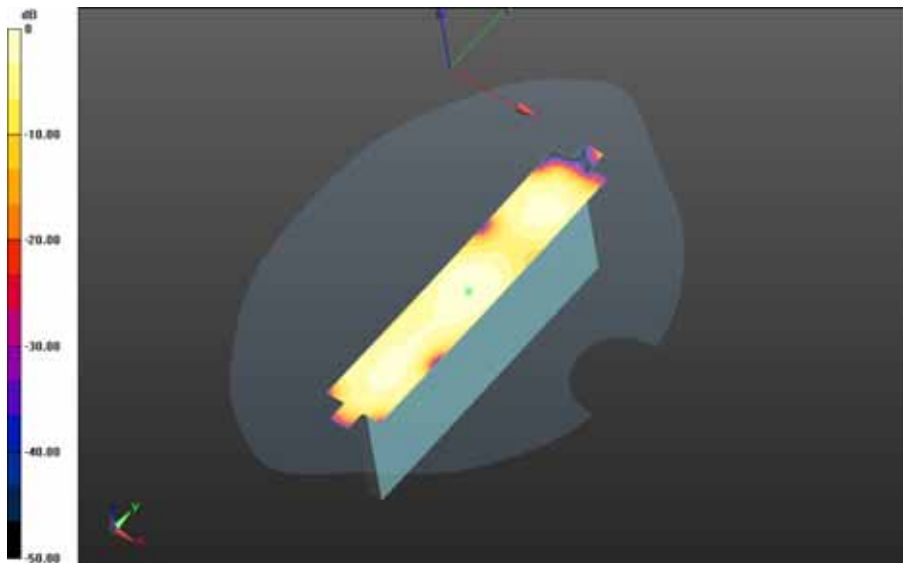


0 dB = 0.0331 W/kg = -14.80 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 42(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Right -
802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Area Scan (41x171x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 1.386 V/m; Power Drift = 0.037 dB**

**Fast SAR: SAR(1g) = 0.000464 W/kg; SAR(10g) = 0.000136 W/kg
Maximum value of SAR (interpolated) = 0.00132 W/kg**

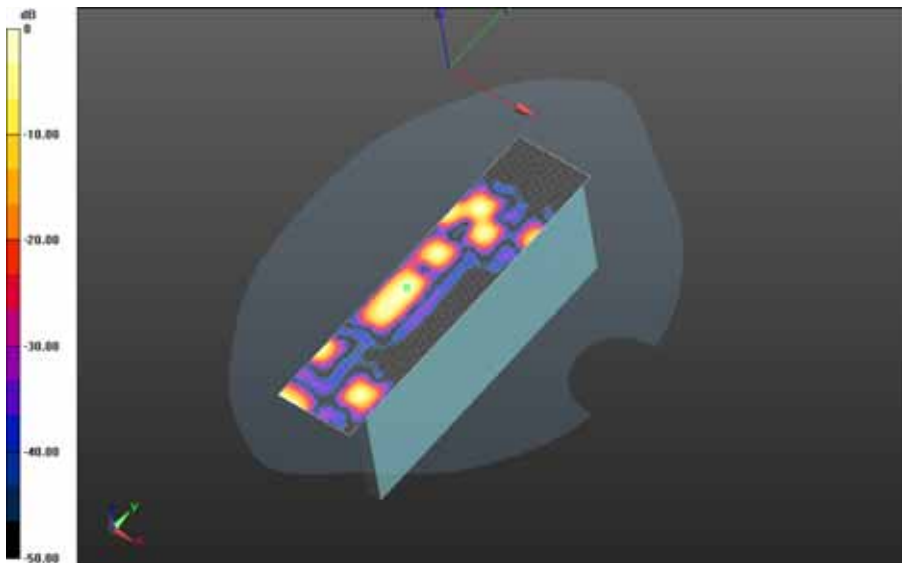


0 dB = 0.00132 W/kg = -28.79 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 43(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Top -
802.11b_chan11_amb_temp_23.5C_liq_temp_22.6C/Area Scan (151x201x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 2.206 V/m; **Power Drift = -0.138 dB**

Fast SAR: SAR(1g) = 0.0100 W/kg; SAR(10g) = 0.00461 W/kg
Maximum value of SAR (interpolated) = 0.0138 W/kg

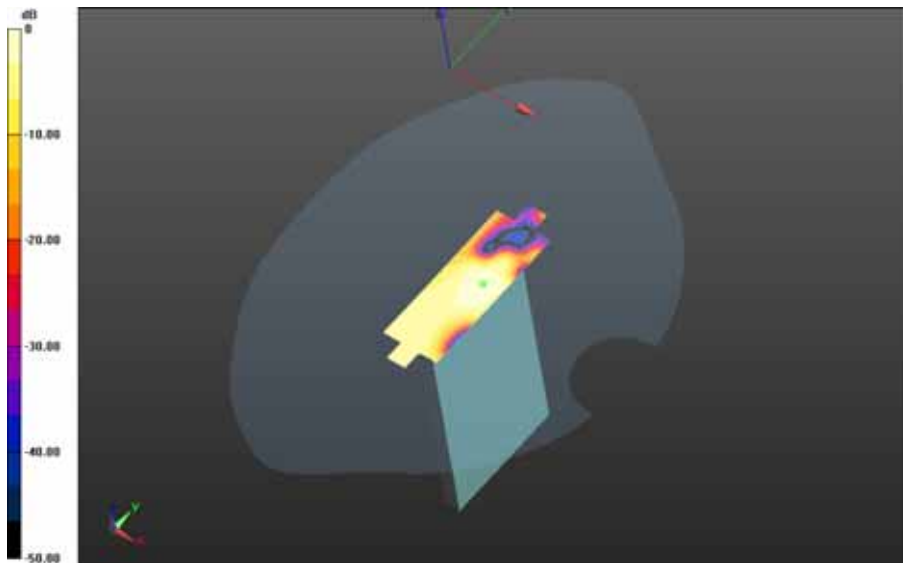

0 dB = 0.0138 W/kg = -18.60 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		44(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/6/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Body Worn MSL - 802.11b

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: f=2412 MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 50.713$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 2.246 V/m; **Power Drift = 0.481 dB**

Fast SAR: SAR(1g) = 0.0347 W/kg; SAR(10g) = 0.0177 W/kg

Maximum value of SAR (interpolated) = 0.0453 W/kg

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 2.246 V/m; **Power Drift = 0.481 dB**

Averaged SAR: SAR(1g) = 0.0346 W/kg; SAR(10g) = 0.0171 W/kg


Maximum value of SAR (interpolated) = 0.0692 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

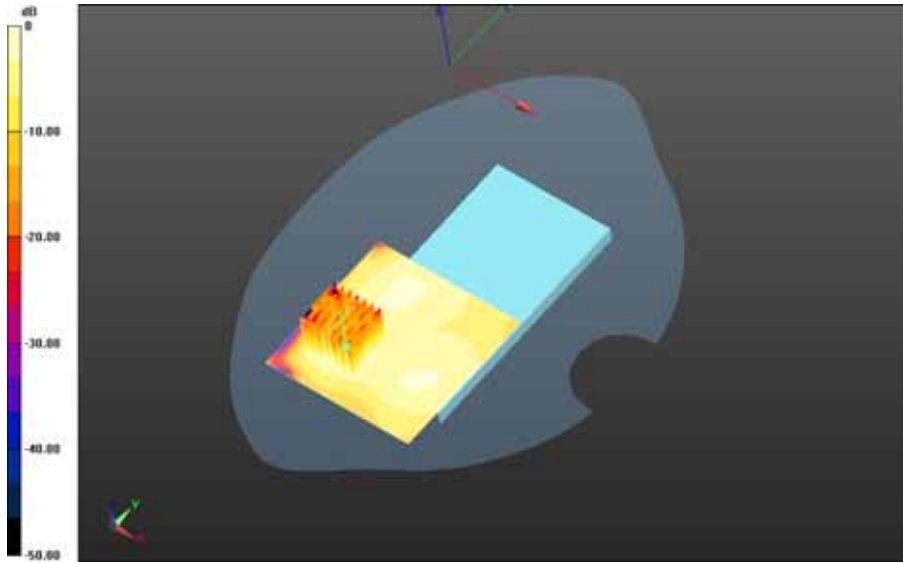

0 dB = 0.0433 W/kg = -13.64 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 46(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan6_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x81x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Reference Value = 2.871 V/m; **Power Drift = 0.158 dB**

Fast SAR: SAR(1g) = 0.0646 W/kg; SAR(10g) = 0.0301 W/kg

Maximum value of SAR (interpolated) = 0.0980 W/kg


Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan6_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 2.871 V/m; **Power Drift = 0.158 dB**

Averaged SAR: SAR(1g) = 0.0619 W/kg; SAR(10g) = 0.0308 W/kg

Maximum value of SAR (interpolated) = 0.125 W/kg

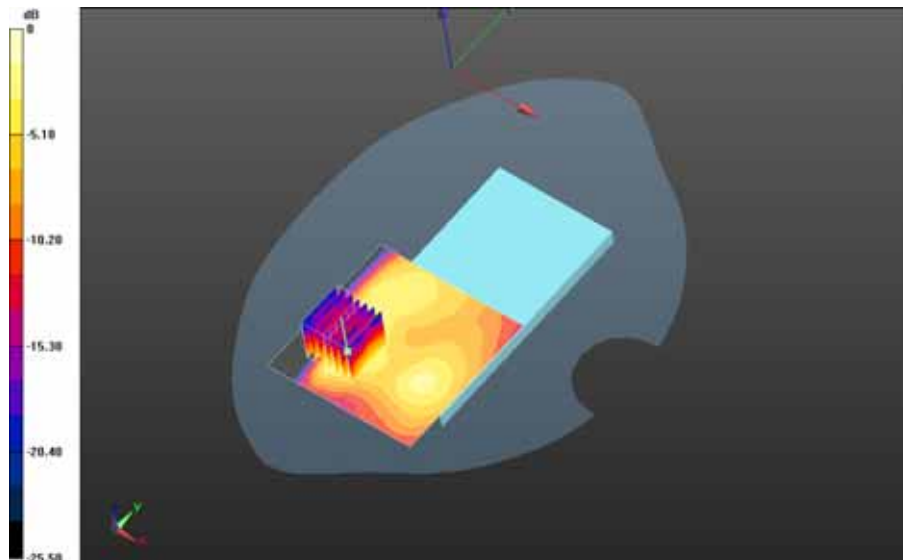

0 dB = 0.0776 W/kg = -11.10 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		47(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x131x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Reference Value = 3.479 V/m; **Power Drift = 0.265 dB**

Fast SAR: SAR(1g) = 0.0914 W/kg; SAR(10g) = 0.0445 W/kg

Maximum value of SAR (interpolated) = 0.121 W/kg

Body Worn MSL - 802.11b/15mm Device Back -


802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 3.479 V/m; **Power Drift = 0.265 dB**

Averaged SAR: SAR(1g) = 0.0927 W/kg; SAR(10g) = 0.0453 W/kg

Maximum value of SAR (interpolated) = 0.187 W/kg

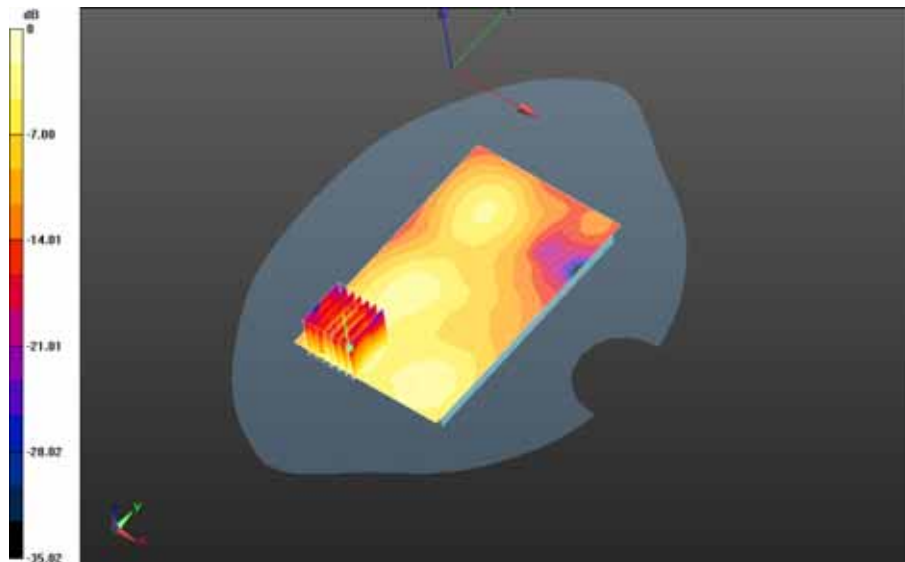

0 dB = 0.118 W/kg = -9.28 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		48(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Body Worn MSL - 802.11b/15mm Device Front -

802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x91x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Reference Value = 1.666 V/m; **Power Drift = 0.459 dB**

Fast SAR: SAR(1g) = 0.0205 W/kg; SAR(10g) = 0.0115 W/kg

Maximum value of SAR (interpolated) = 0.0253 W/kg

10g avg. SAR maximum on border.

Body Worn MSL - 802.11b/15mm Device Front -


802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 1.666 V/m; **Power Drift = 0.459 dB**

Averaged SAR: SAR(1g) = 0.0216 W/kg; SAR(10g) = 0.0118 W/kg

Maximum value of SAR (interpolated) = 0.0419 W/kg

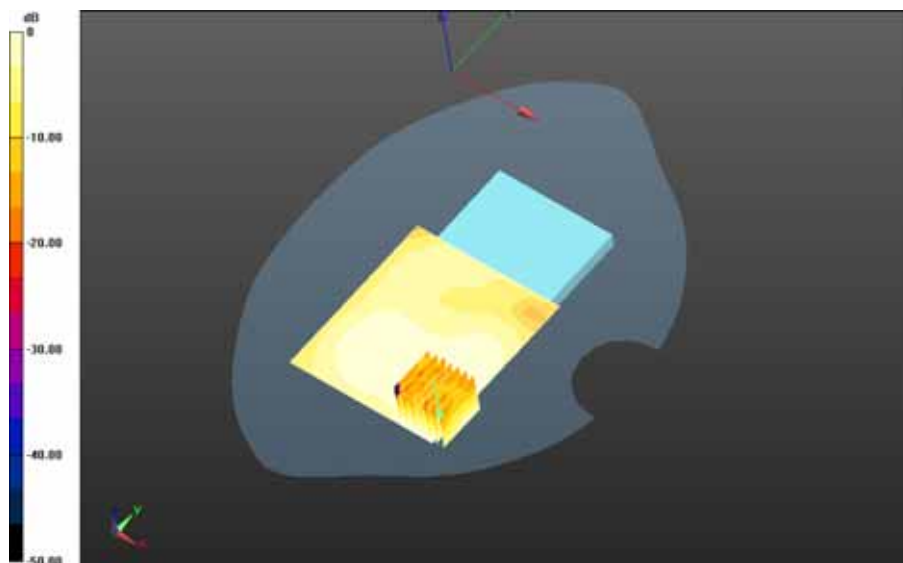

0 dB = 0.0264 W/kg = -15.78 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 49(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Body Worn MSL - 802.11b/Holster Device Back -

802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x101x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Reference Value = 3.661 V/m; **Power Drift = 0.160 dB**

Fast SAR: SAR(1g) = 0.0499 W/kg; SAR(10g) = 0.0262 W/kg

Maximum value of SAR (interpolated) = 0.0638 W/kg

Body Worn MSL - 802.11b/Holster Device Back -


802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 3.661 V/m; **Power Drift = 0.160 dB**

Averaged SAR: SAR(1g) = 0.0490 W/kg; SAR(10g) = 0.0258 W/kg

Maximum value of SAR (interpolated) = 0.0960 W/kg

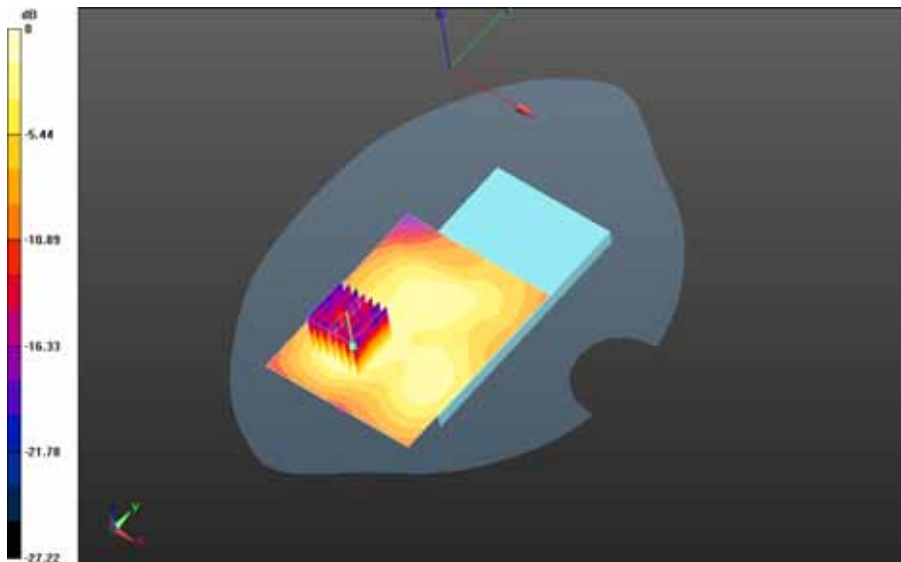

0 dB = 0.0619 W/kg = -12.08 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 50(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

(Secondary Antenna_Core 1)

Date: 9/7/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11b_Slider Closed

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: f=2412 MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 37.574$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan1_amb_temp_23.9C_liq_temp_22.7C/Area Scan (101x101x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 3.711 V/m; **Power Drift = 0.237 dB**

Fast SAR: SAR(1g) = 0.0275 W/kg; SAR(10g) = 0.0154 W/kg

Maximum value of SAR (interpolated) = 0.0343 W/kg

Right-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan1_amb_temp_23.9C_liq_temp_22.7C/Zoom Scan (36x36x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 3.711 V/m; **Power Drift = 0.237 dB**

Averaged SAR: SAR(1g) = 0.0291 W/kg; SAR(10g) = 0.0165 W/kg


Maximum value of SAR (interpolated) = 0.0515 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

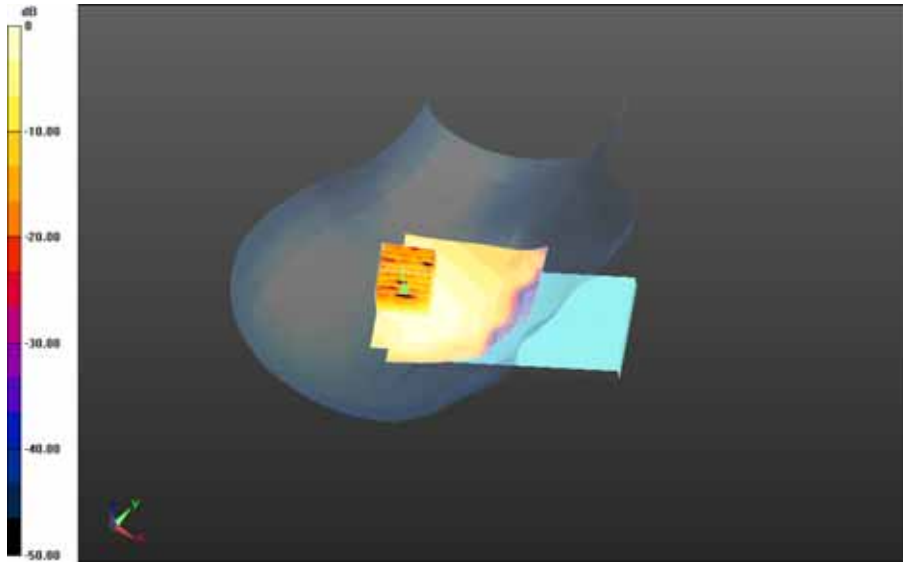

0 dB = 0.0359 W/kg = -14.45 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		52(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Right-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position - 802.11b_chan1_amb_temp_23.7C_liq_temp_22.8C/Area Scan (151x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 3.944 V/m; **Power Drift = 0.250 dB**


Fast SAR: SAR(1g) = 0.0348 W/kg; SAR(10g) = 0.0183 W/kg
Maximum value of SAR (interpolated) = 0.0440 W/kg

Right-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position - 802.11b_chan1_amb_temp_23.7C_liq_temp_22.8C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 3.944 V/m; **Power Drift = 0.250 dB**

Averaged SAR: SAR(1g) = 0.0351 W/kg; SAR(10g) = 0.0182 W/kg
Maximum value of SAR (interpolated) = 0.0680 W/kg

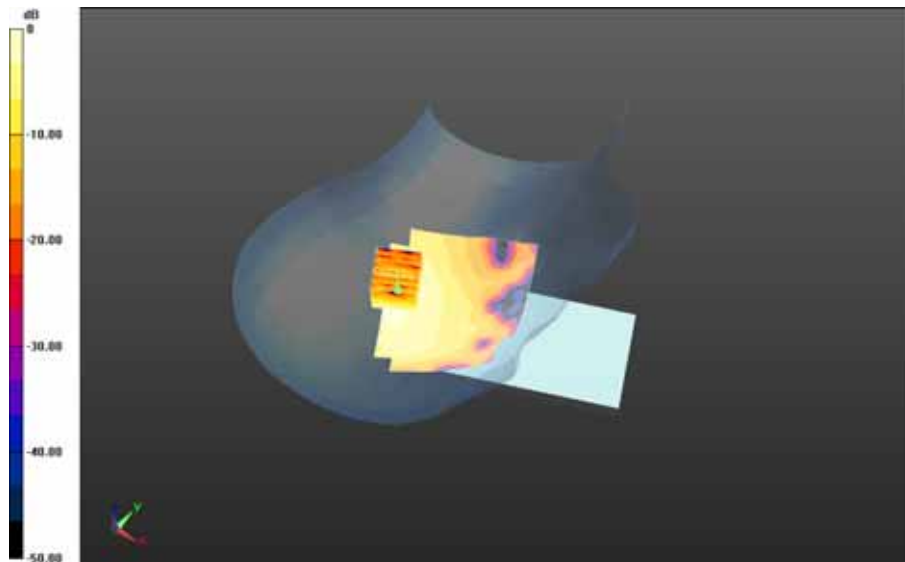

0 dB = 0.0447 W/kg = -13.50 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		53(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11b_Slider Closed

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: $f=2412$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 37.574$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan1_amb_temp_23.9C_liq_temp_22.8C/Area Scan (151x101x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 2.748 V/m; **Power Drift = 0.296 dB**

Fast SAR: SAR(1g) = 0.0461 W/kg; SAR(10g) = 0.0240 W/kg

Maximum value of SAR (interpolated) = 0.0591 W/kg

Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -

802.11b_chan1_amb_temp_23.9C_liq_temp_22.8C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 2.748 V/m; **Power Drift = 0.296 dB**

Averaged SAR: SAR(1g) = 0.0550 W/kg; SAR(10g) = 0.0269 W/kg


Maximum value of SAR (interpolated) = 0.167 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

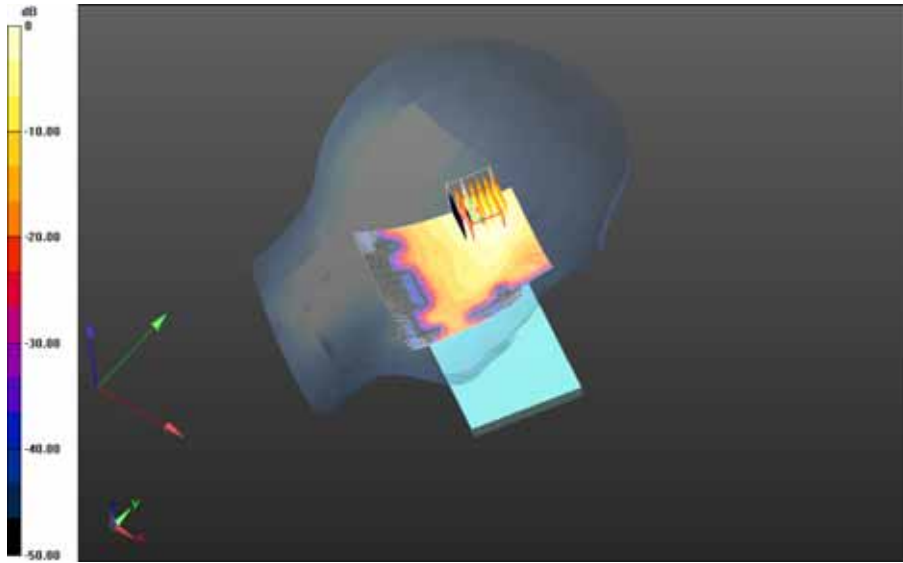

0 dB = 0.0654 W/kg = -11.84 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		55(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

**Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -
802.11b_chan6_amb_temp_24.1C_liq_temp_23.1C/Area Scan (81x91x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 3.563 V/m; **Power Drift = 0.321 dB**


Fast SAR: SAR(1g) = 0.0675 W/kg; SAR(10g) = 0.0383 W/kg
Maximum value of SAR (interpolated) = 0.0883 W/kg

**Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -
802.11b_chan6_amb_temp_24.1C_liq_temp_23.1C/Zoom Scan (36x31x36)/Cube 0:**
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 3.563 V/m; **Power Drift = 0.321 dB**

Averaged SAR: SAR(1g) = 0.0736 W/kg; SAR(10g) = 0.0395 W/kg
Maximum value of SAR (interpolated) = 0.158 W/kg

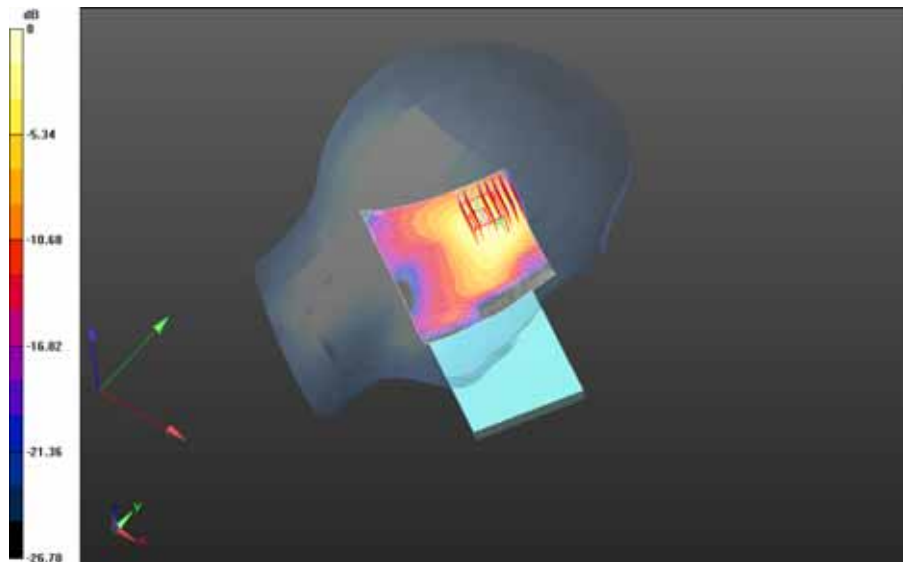

0 dB = 0.0974 W/kg = -10.11 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 56(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -
802.11b_chan11_amb_temp_23.8C_liq_temp_23.0C/Area Scan (81x91x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 3.144 V/m; **Power Drift = 0.371 dB**


Fast SAR: SAR(1g) = 0.0625 W/kg; SAR(10g) = 0.0354 W/kg
Maximum value of SAR (interpolated) = 0.0808 W/kg

**Left-Hand-Side HSL - 802.11b_Slider Closed/Touch Position -
802.11b_chan11_amb_temp_23.8C_liq_temp_23.0C/Zoom Scan (36x31x36)/Cube 0:**
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 3.144 V/m; **Power Drift = 0.371 dB**

Averaged SAR: SAR(1g) = 0.0696 W/kg; SAR(10g) = 0.0376 W/kg
Maximum value of SAR (interpolated) = 0.148 W/kg

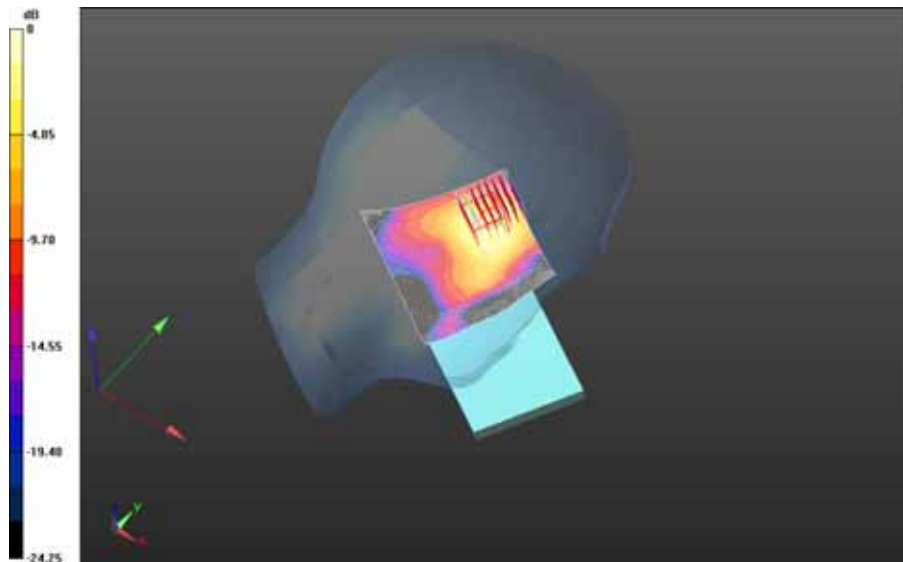

0 dB = 0.0919 W/kg = -10.37 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		57(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position - 802.11b_chan1_amb_temp_23.7C_liq_temp_22.9C/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 3.246 V/m; **Power Drift = 0.552 dB**


Fast SAR: SAR(1g) = 0.0627 W/kg; SAR(10g) = 0.0315 W/kg
Maximum value of SAR (interpolated) = 0.0824 W/kg

Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position - 802.11b_chan1_amb_temp_23.7C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 3.246 V/m; **Power Drift = 0.552 dB**

Averaged SAR: SAR(1g) = 0.0695 W/kg; SAR(10g) = 0.0327 W/kg
Maximum value of SAR (interpolated) = 0.160 W/kg

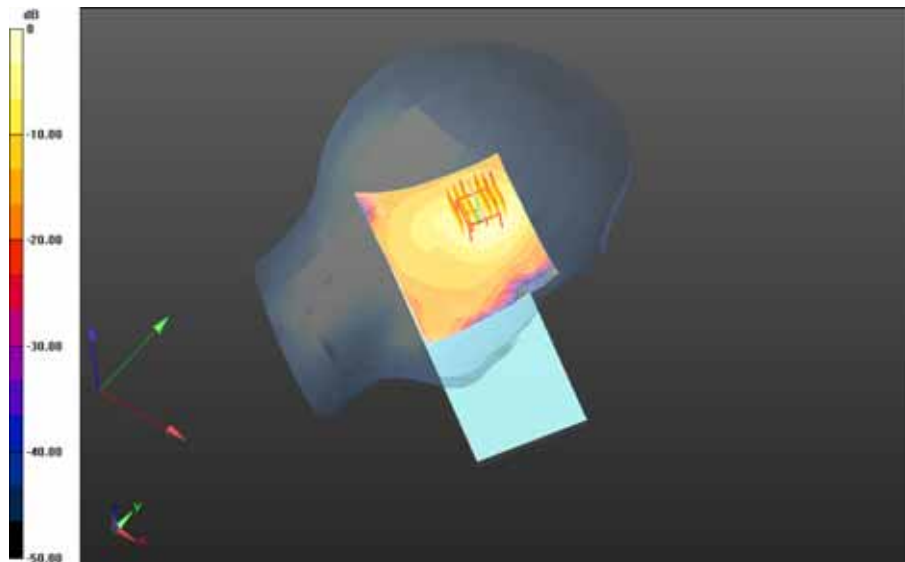

0 dB = 0.0806 W/kg = -10.94 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 58(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position -
 802.11b_chan6_amb_temp_23.7C_liq_temp_22.9C/Area Scan (81x101x1):** Interpolated grid:
 dx=1.200 mm, dy=1.200 mm
 Reference Value = 3.768 V/m; **Power Drift = 0.353 dB**


Fast SAR: SAR(1g) = 0.0704 W/kg; SAR(10g) = 0.0356 W/kg
 Maximum value of SAR (interpolated) = 0.0924 W/kg

**Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position -
 802.11b_chan6_amb_temp_23.7C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0:**
 Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
 Reference Value = 3.768 V/m; **Power Drift = 0.353 dB**

Averaged SAR: SAR(1g) = 0.0799 W/kg; SAR(10g) = 0.0378 W/kg
 Maximum value of SAR (interpolated) = 0.179 W/kg

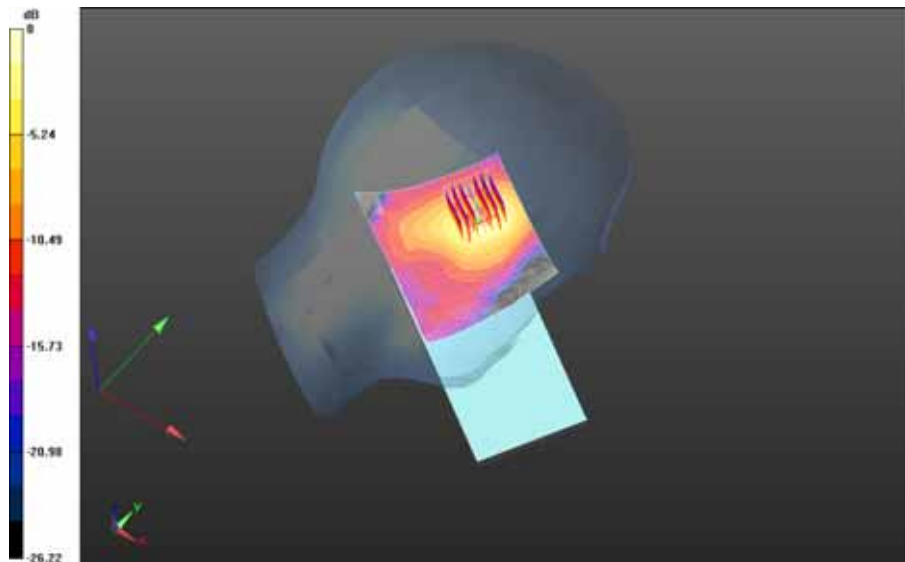

0 dB = 0.0923 W/kg = -10.35 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 59(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position -
802.11b_chan11_amb_temp_23.7C_liq_temp_22.9C/Area Scan (81x101x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 3.403 V/m; **Power Drift = 0.474 dB**


Fast SAR: SAR(1g) = 0.0622 W/kg; SAR(10g) = 0.0311 W/kg
Maximum value of SAR (interpolated) = 0.0822 W/kg

**Left-Hand-Side HSL - 802.11b_Slider Closed/Tilt Position -
802.11b_chan11_amb_temp_23.7C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0:**
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 3.403 V/m; **Power Drift = 0.474 dB**

Averaged SAR: SAR(1g) = 0.0705 W/kg; SAR(10g) = 0.0330 W/kg
Maximum value of SAR (interpolated) = 0.155 W/kg

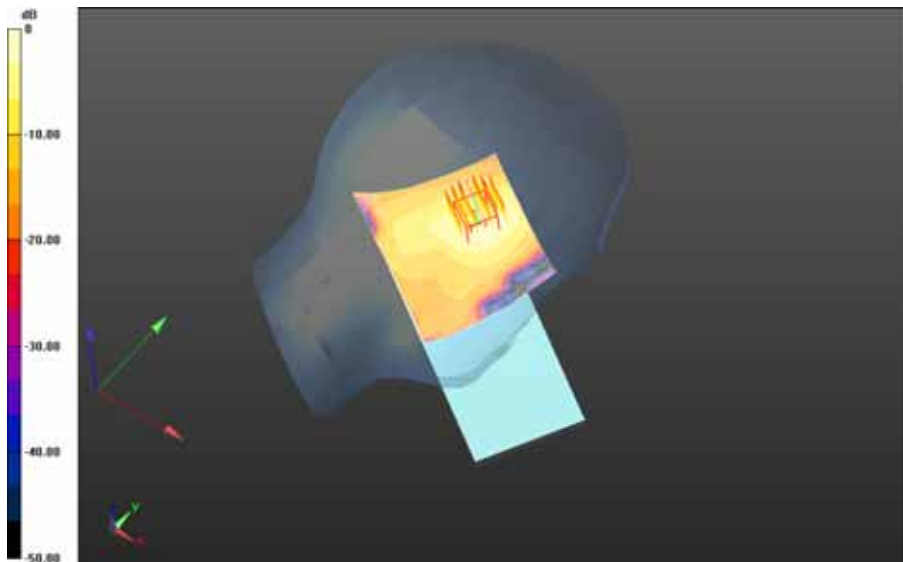

0 dB = 0.0808 W/kg = -10.93 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		60(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/7/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11b_Slider Open

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: $f=2412$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 37.574$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.0C/Area Scan (101x81x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 2.514 V/m; **Power Drift = 0.390 dB**

Fast SAR: SAR(1g) = 0.0220 W/kg; SAR(10g) = 0.0113 W/kg

Maximum value of SAR (interpolated) = 0.0285 W/kg

Right-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.0C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 2.514 V/m; **Power Drift = 0.390 dB**

Averaged SAR: SAR(1g) = 0.0223 W/kg; SAR(10g) = 0.0116 W/kg


Maximum value of SAR (interpolated) = 0.0413 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

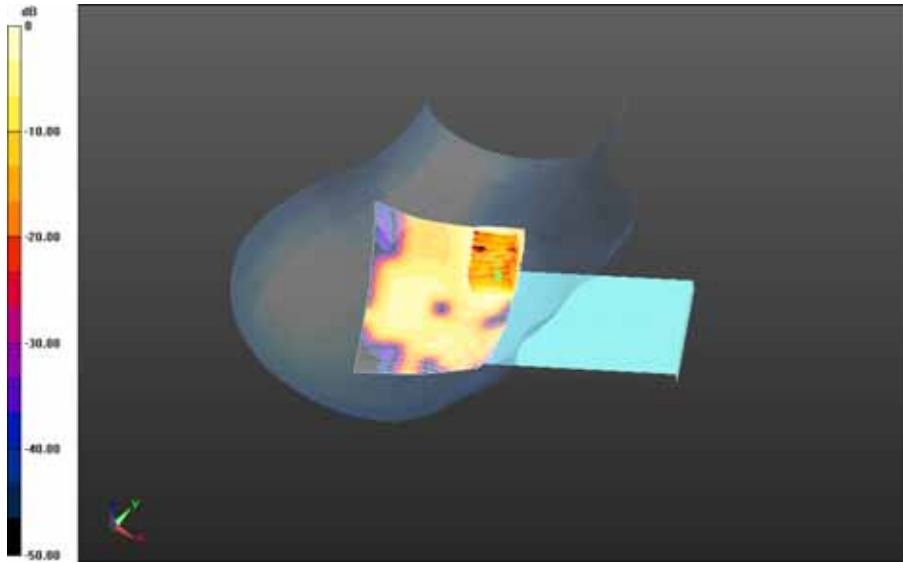

0 dB = 0.0281 W/kg = -15.51 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 62(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Right-Hand-Side HSL - 802.11b_Slider Open/Tilt Position -
802.11b_chan1_amb_temp_23.8C_liq_temp_23.0C/Area Scan (151x101x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 3.448 V/m; **Power Drift = 0.412 dB**


Fast SAR: SAR(1g) = 0.0173 W/kg; SAR(10g) = 0.00868 W/kg
Maximum value of SAR (interpolated) = 0.0226 W/kg

**Right-Hand-Side HSL - 802.11b_Slider Open/Tilt Position -
802.11b_chan1_amb_temp_23.8C_liq_temp_23.0C/Zoom Scan (31x31x36)/Cube 0:**
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 3.448 V/m; **Power Drift = 0.412 dB**

Averaged SAR: SAR(1g) = 0.0175 W/kg; SAR(10g) = 0.00844 W/kg
Maximum value of SAR (interpolated) = 0.0971 W/kg

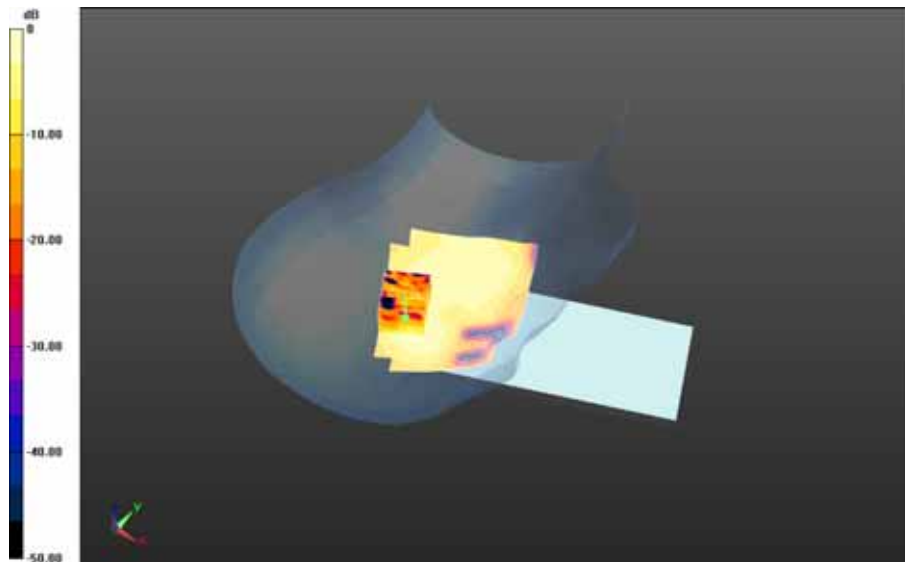

0 dB = 0.0225 W/kg = -16.48 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		63(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/8/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11b_Slider Open

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: $f=2412$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 37.574$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.6,4.6,4.6); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan1_amb_temp_23.9C_liq_temp_22.7C/Area Scan (151x81x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 2.425 V/m; **Power Drift = 0.453 dB**

Fast SAR: SAR(1g) = 0.0254 W/kg; SAR(10g) = 0.0137 W/kg

Maximum value of SAR (interpolated) = 0.0317 W/kg

Left-Hand-Side HSL - 802.11b_Slider Open/Touch Position -

802.11b_chan1_amb_temp_23.9C_liq_temp_22.7C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 2.425 V/m; **Power Drift = 0.453 dB**

Averaged SAR: SAR(1g) = 0.0246 W/kg; SAR(10g) = 0.0133 W/kg


Maximum value of SAR (interpolated) = 0.0462 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

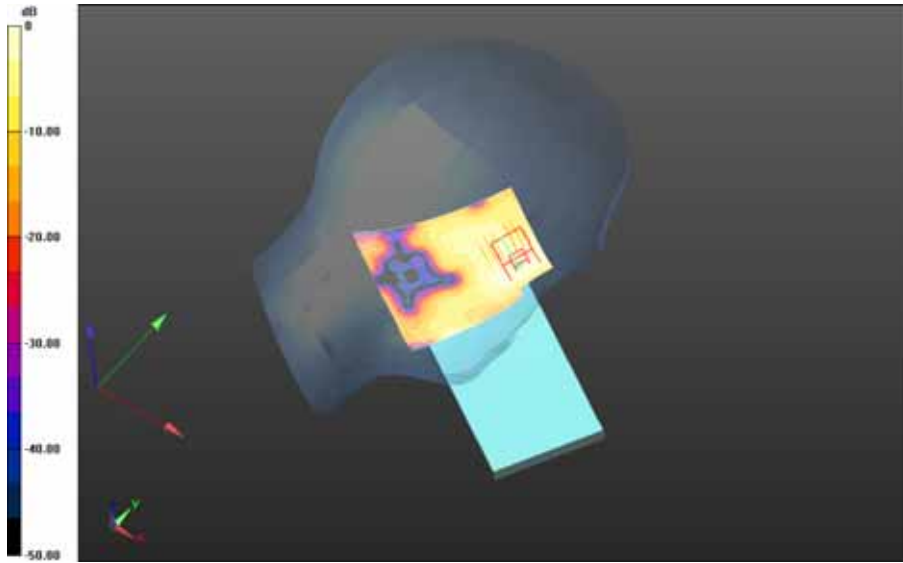

0 dB = 0.0308 W/kg = -15.11 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 65(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Left-Hand-Side HSL - 802.11b_Slider Open/Tilt Position -

802.11b_chan1_amb_temp_23.7C_liq_temp_22.8C/Area Scan (81x91x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Reference Value = 3.694 V/m; **Power Drift = 0.159 dB**

Fast SAR: SAR(1g) = 0.0152 W/kg; SAR(10g) = 0.00746 W/kg

Maximum value of SAR (interpolated) = 0.0198 W/kg


Left-Hand-Side HSL - 802.11b_Slider Open/Tilt Position -

802.11b_chan1_amb_temp_23.7C_liq_temp_22.8C/Zoom Scan (31x31x36)/Cube 0:
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 3.694 V/m; **Power Drift = 0.159 dB**

Averaged SAR: SAR(1g) = 0.0160 W/kg; SAR(10g) = 0.00793 W/kg

Maximum value of SAR (interpolated) = 0.0331 W/kg

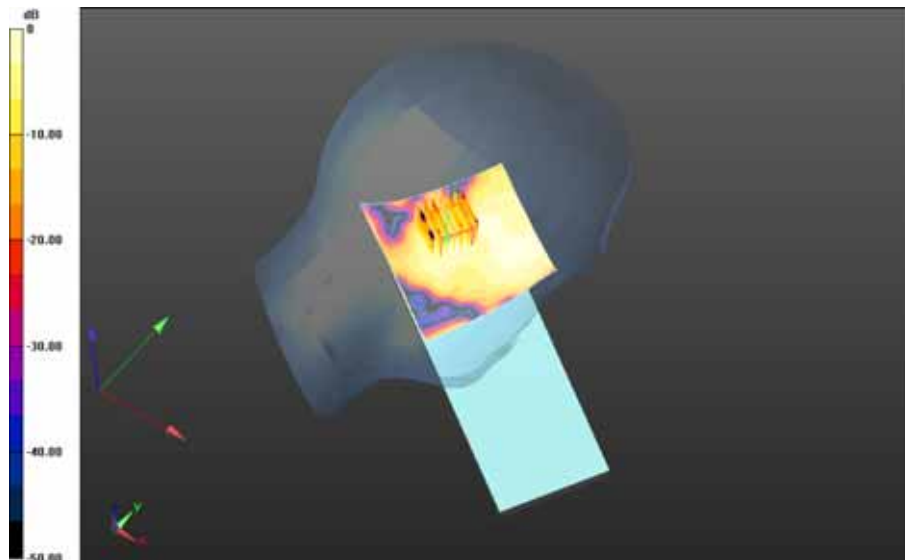

0 dB = 0.0213 W/kg = -16.72 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		66(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/16/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Mobile Hot Spot MSL - 802.11b_Slider Closed

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2462 MHz

Medium Parameters used: $f=2462$ MHz; $\sigma = 2.034$ S/m; $\epsilon_r = 50.309$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Back -

802.11b_chan11_amb_temp_23.7C_liq_temp_23.1C/Area Scan (71x81x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 0.935 V/m; **Power Drift = 0.140 dB**

Fast SAR: SAR(1g) = 0.0198 W/kg; SAR(10g) = 0.00886 W/kg


Maximum value of SAR (interpolated) = 0.0287 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

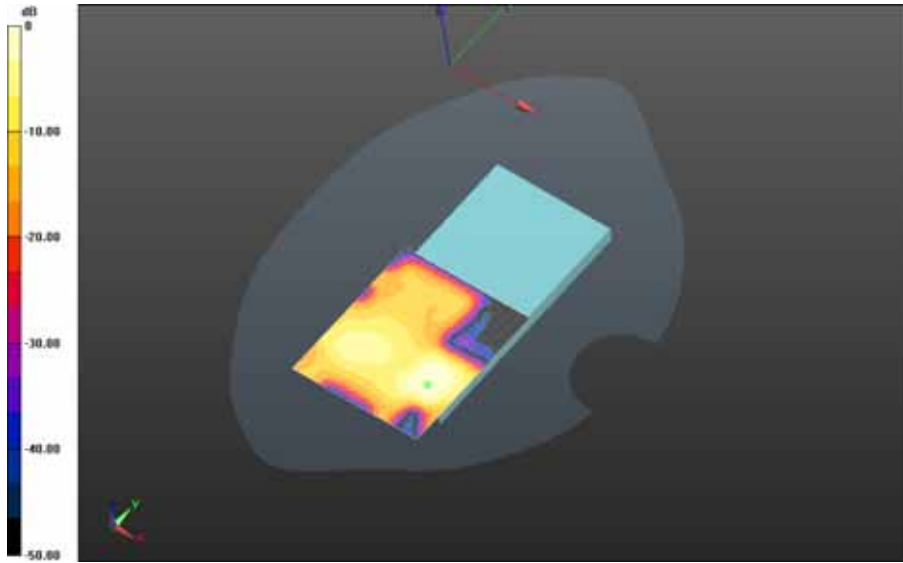


0 dB = 0.0287 W/kg = -15.42 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 68(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Mobile Hot Spot MSL - 802.11b_Slider Closed/10mm Device Front -
802.11b_chan11_amb_temp_24.1C_liq_temp_23.0C/Area Scan (151x81x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 0.443 V/m; Power Drift = -0.088 dB**

**Fast SAR: SAR(1g) = 0.00303 W/kg; SAR(10g) = 0.00115 W/kg
Maximum value of SAR (interpolated) = 0.00495 W/kg**

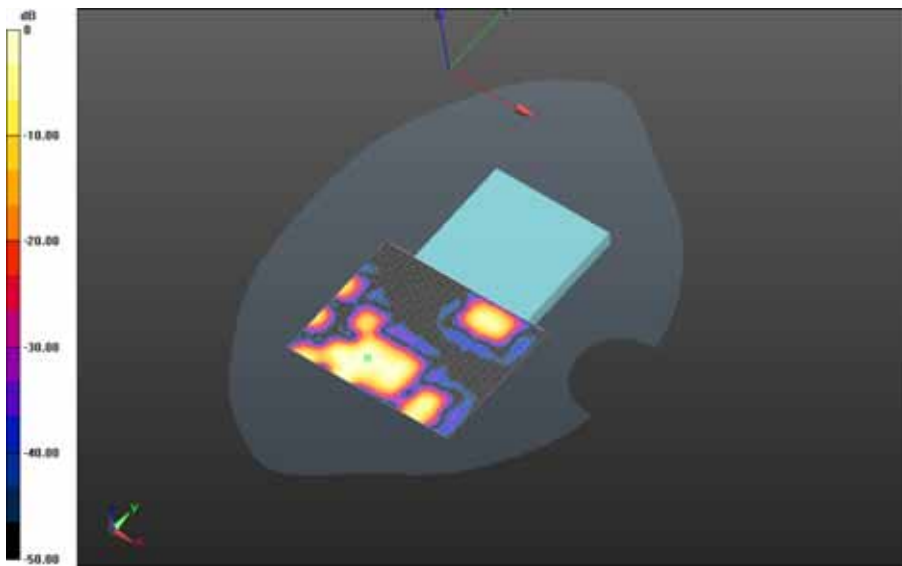

0 dB = 0.00495 W/kg = -23.05 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		69(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/16/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Mobile Hot Spot MSL - 802.11b_Slider Open

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: $f=2412$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 50.453$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back -


802.11b_chan1_amb_temp_24.1C_liq_temp_23.0C/Area Scan (81x101x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm


Reference Value = 1.287 V/m; **Power Drift = -0.132 dB**

Fast SAR: SAR(1g) = 0.0250 W/kg; SAR(10g) = 0.0123 W/kg

Maximum value of SAR (interpolated) = 0.0339 W/kg

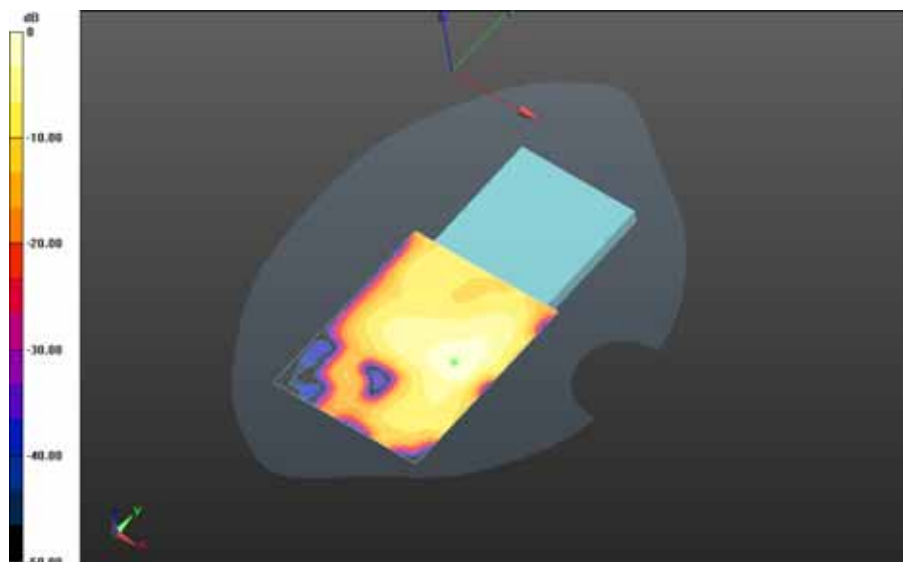


0 dB = 0.0339 W/kg = -14.70 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 70(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back -
 802.11b_chan6_amb_temp_24.1C_liq_temp_23.1C/Area Scan (81x101x1):** Interpolated grid:
 dx=1.200 mm, dy=1.200 mm
 Reference Value = 1.297 V/m; **Power Drift = -0.161 dB**

Fast SAR: SAR(1g) = 0.0296 W/kg; SAR(10g) = 0.0142 W/kg
 Maximum value of SAR (interpolated) = 0.0397 W/kg

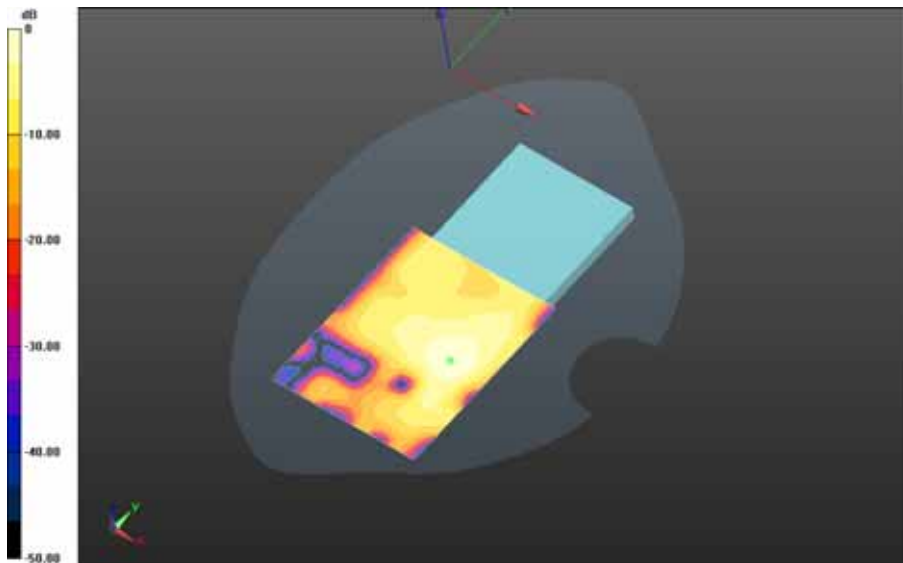

0 dB = 0.0397 W/kg = -14.01 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 71(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back -
802.11b_chan11_amb_temp_24.1C_liq_temp_23.0C/Area Scan (81x111x1):** Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 1.425 V/m; **Power Drift = -0.142 dB**


Fast SAR: SAR(1g) = 0.0327 W/kg; SAR(10g) = 0.0157 W/kg
Maximum value of SAR (interpolated) = 0.0440 W/kg

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Back -
802.11b_chan11_amb_temp_24.1C_liq_temp_23.0C/Zoom Scan (31x31x36)/Cube 0:**
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 1.425 V/m; **Power Drift = -0.142 dB**

Averaged SAR: SAR(1g) = 0.0350 W/kg; SAR(10g) = 0.0156 W/kg
Maximum value of SAR (interpolated) = 0.0791 W/kg

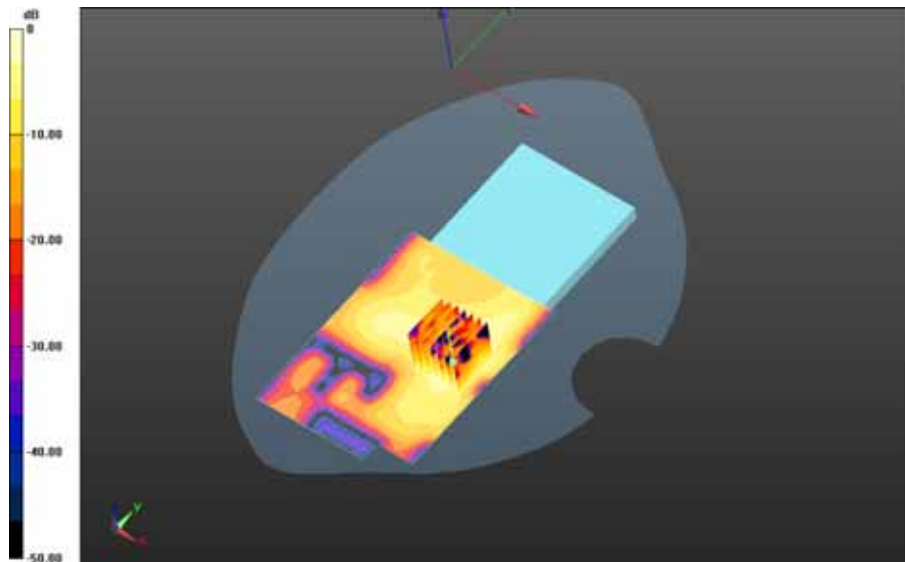


0 dB = 0.0456 W/kg = -13.41 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 72(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Front -
 802.11b_chan11_amb_temp_24.0C_liq_temp_22.9C/Area Scan (81x101x1): Interpolated grid:
 dx=1.200 mm, dy=1.200 mm
 Reference Value = 0.625 V/m; Power Drift = 0.136 dB**

**Fast SAR: SAR(1g) = 0.00295 W/kg; SAR(10g) = 0.00156 W/kg
 Maximum value of SAR (interpolated) = 0.00511 W/kg**

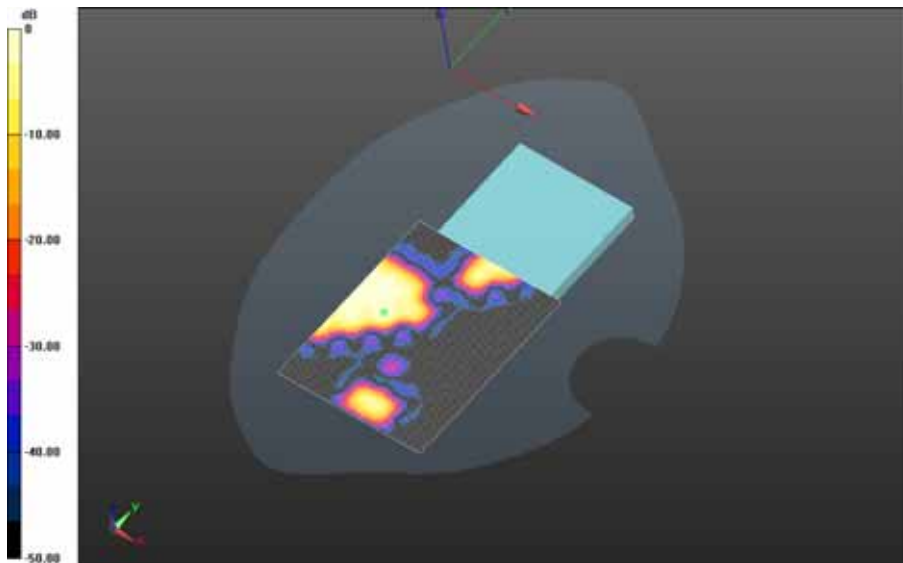


0 dB = 0.00511 W/kg = -22.92 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 73(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Left -
802.11b_chan11_amb_temp_23.8C_liq_temp_22.7C/Area Scan (51x161x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 0.538 V/m; Power Drift = 0.395 dB**

**Fast SAR: SAR(1g) = 0.000215 W/kg; SAR(10g) = 0.0000466 W/kg
Maximum value of SAR (interpolated) = 0.000991 W/kg**

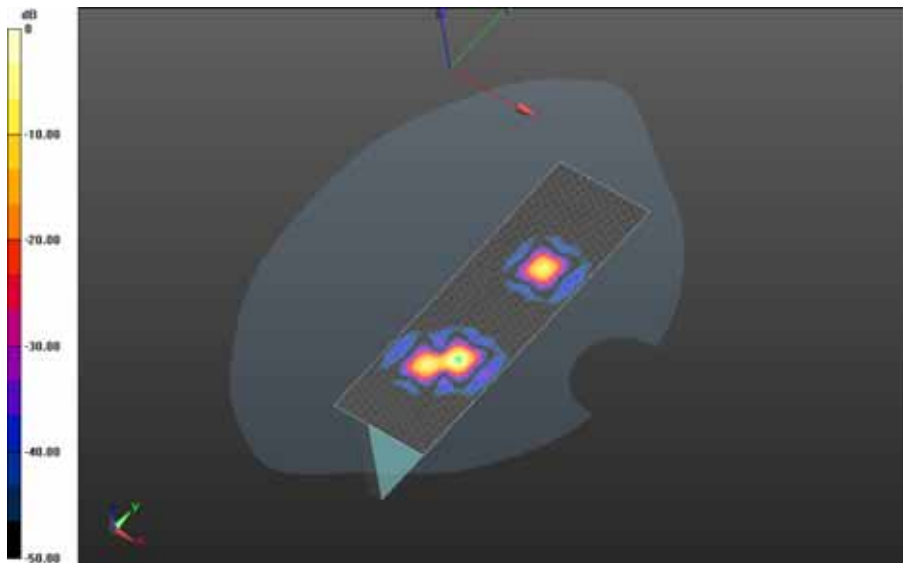


0 dB = 0.000991 W/kg = -30.04 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 74(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

**Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Right -
 802.11b_chan11_amb_temp_23.6C_liq_temp_22.5C/Area Scan (151x201x1):** Interpolated grid:
 dx=1.200 mm, dy=1.200 mm
 Reference Value = 1.933 V/m; **Power Drift = 0.157 dB**

Fast SAR: SAR(1g) = 0.00892 W/kg; SAR(10g) = 0.00456 W/kg
 Maximum value of SAR (interpolated) = 0.0156 W/kg

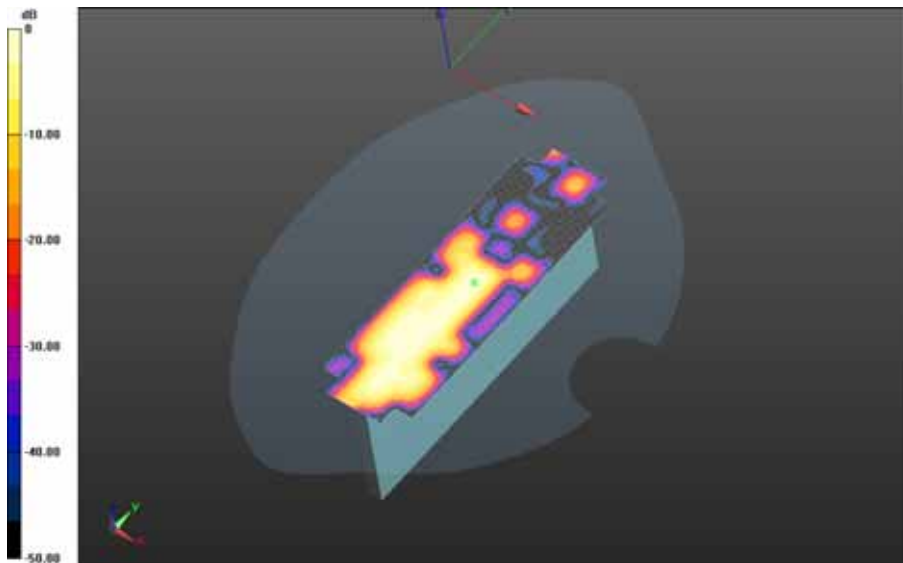


0 dB = 0.0156 W/kg = -18.07 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 75(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Mobile Hot Spot MSL - 802.11b_Slider Open/10mm Device Top -
802.11b_chan11_amb_temp_23.6C_liq_temp_22.5C/Area Scan (151x201x1): Interpolated grid:
 dx=1.200 mm, dy=1.200 mm
 Reference Value = 0.938 V/m; **Power Drift = 0.181 dB**

Fast SAR: SAR(1g) = 0.00174 W/kg; SAR(10g) = 0.000770 W/kg
 Maximum value of SAR (interpolated) = 0.00372 W/kg

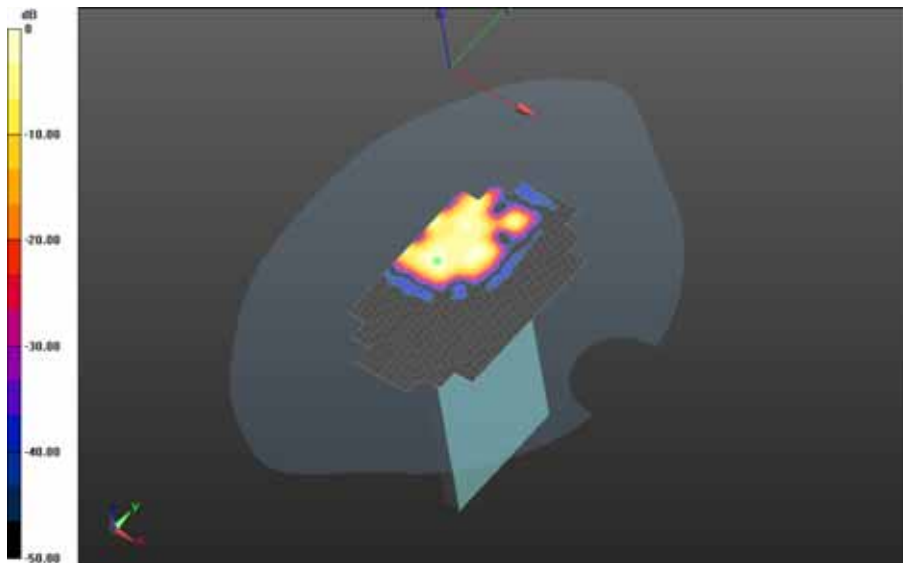

0 dB = 0.00372 W/kg = -24.29 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		76(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/6/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Body Worn MSL - 802.11b

Communication System: 802.11 b/g (2450) (0); Communication System Band: 802.11 b/g;

Frequency: 2412 MHz

Medium Parameters used: f=2412 MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 50.713$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.34,4.34,4.34); Calibrated: 2/25/2015;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x131x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 1.512 V/m; **Power Drift = 0.380 dB**

Fast SAR: SAR(1g) = 0.0333 W/kg; SAR(10g) = 0.0171 W/kg

Maximum value of SAR (interpolated) = 0.0426 W/kg

Body Worn MSL - 802.11b/15mm Device Back -


802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.512 V/m; **Power Drift = 0.380 dB**


Averaged SAR: SAR(1g) = 0.0348 W/kg; SAR(10g) = 0.0174 W/kg

Maximum value of SAR (interpolated) = 0.0706 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 77(164)
Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

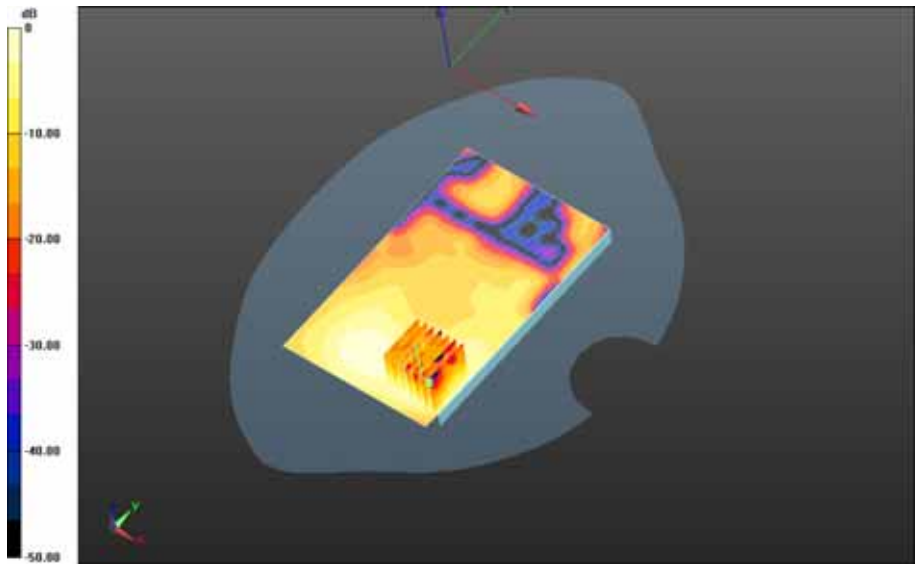

0 dB = 0.0441 W/kg = -13.56 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 78(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan6_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x81x1): Interpolated grid:
 dx=1.200 mm, dy=1.200 mm

Reference Value = 1.688 V/m; **Power Drift = 0.064 dB**

Fast SAR: SAR(1g) = 0.0377 W/kg; SAR(10g) = 0.0192 W/kg

Maximum value of SAR (interpolated) = 0.0496 W/kg


Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan6_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:
 Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 1.688 V/m; **Power Drift = 0.064 dB**

Averaged SAR: SAR(1g) = 0.0362 W/kg; SAR(10g) = 0.0183 W/kg

Maximum value of SAR (interpolated) = 0.0744 W/kg

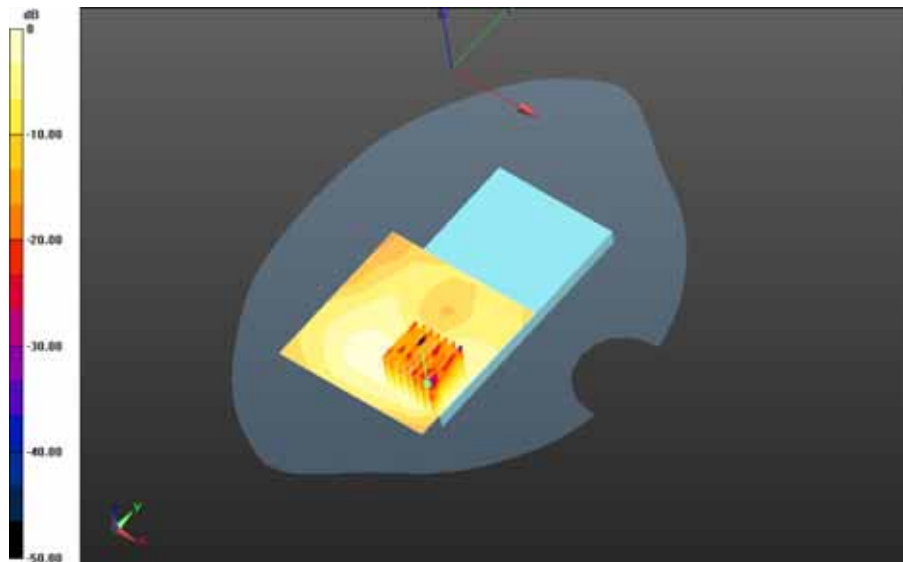

0 dB = 0.0468 W/kg = -13.30 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		79(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x81x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Reference Value = 1.488 V/m; **Power Drift = 0.061 dB**

Fast SAR: SAR(1g) = 0.0404 W/kg; SAR(10g) = 0.0200 W/kg

Maximum value of SAR (interpolated) = 0.0533 W/kg

Body Worn MSL - 802.11b/15mm Device Back -


802.11b_chan11_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 1.488 V/m; **Power Drift = 0.061 dB**

Averaged SAR: SAR(1g) = 0.0384 W/kg; SAR(10g) = 0.0189 W/kg

Maximum value of SAR (interpolated) = 0.0807 W/kg

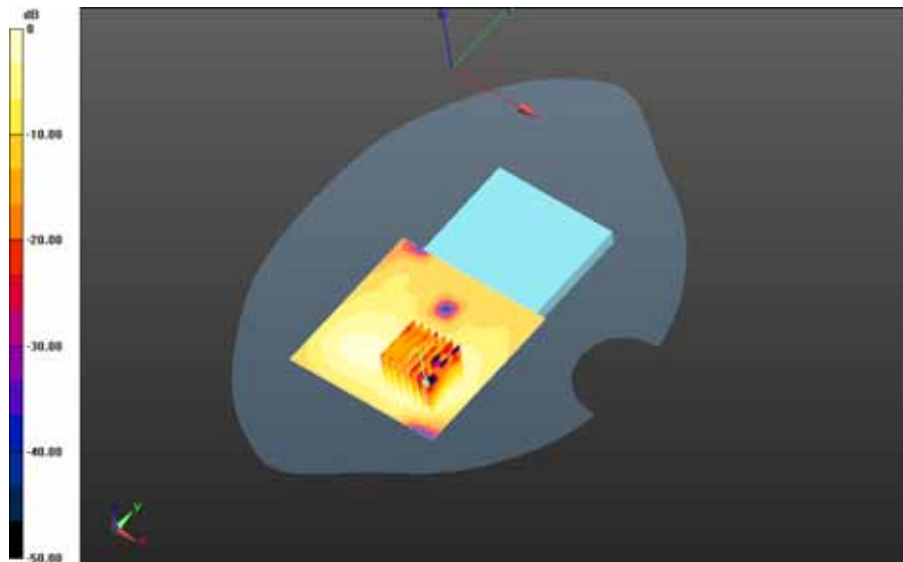

0 dB = 0.0489 W/kg = -13.11 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 80(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Body Worn MSL - 802.11b/15mm Device Front -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x91x1): Interpolated grid:
 dx=1.200 mm, dy=1.200 mm

Reference Value = 1.041 V/m; **Power Drift = 0.113 dB**

Fast SAR: SAR(1g) = 0.00608 W/kg; SAR(10g) = 0.00350 W/kg

Maximum value of SAR (interpolated) = 0.00760 W/kg


Body Worn MSL - 802.11b/15mm Device Front -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (36x36x36)/Cube 0:
 Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 1.041 V/m; **Power Drift = 0.113 dB**

Averaged SAR: SAR(1g) = 0.00620 W/kg; SAR(10g) = 0.00335 W/kg

Maximum value of SAR (interpolated) = 0.0124 W/kg

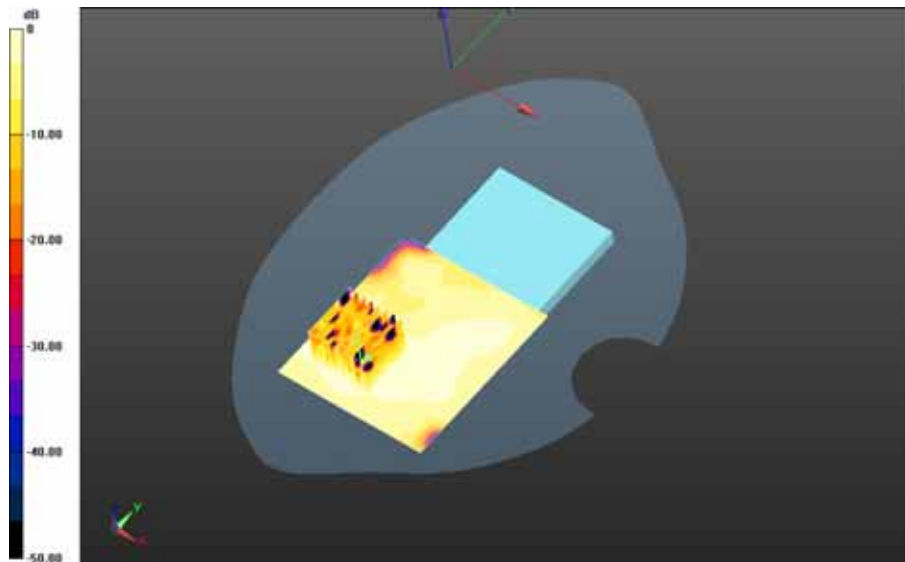

0 dB = 0.00769 W/kg = -21.14 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 81(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Body Worn MSL - 802.11b/Holster Device Back -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Area Scan (81x101x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Reference Value = 1.735 V/m; **Power Drift = 0.130 dB**

Fast SAR: SAR(1g) = 0.0179 W/kg; SAR(10g) = 0.00951 W/kg

Maximum value of SAR (interpolated) = 0.0226 W/kg


Body Worn MSL - 802.11b/Holster Device Back -

802.11b_chan1_amb_temp_23.7C_liq_temp_23.7C/Zoom Scan (36x31x36)/Cube 0:
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm


Reference Value = 1.735 V/m; **Power Drift = 0.130 dB**

Averaged SAR: SAR(1g) = 0.0174 W/kg; SAR(10g) = 0.00892 W/kg

Maximum value of SAR (interpolated) = 0.0327 W/kg

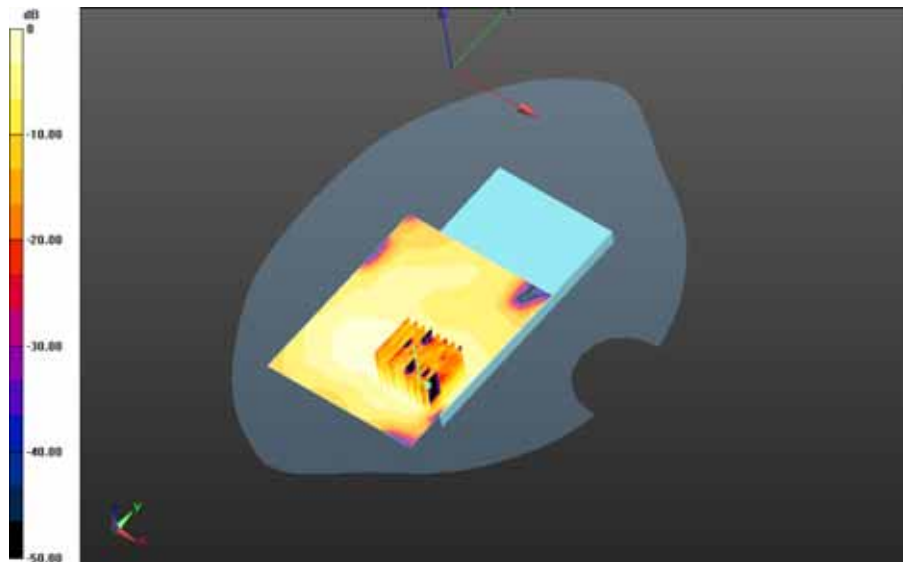

0 dB = 0.0221 W/kg = -16.56 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 82(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

802.11a/n (Primary Antenna_Core 0)

Date: 9/12/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5200 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: $f=5270$ MHz; $\sigma = 4.798$ S/m; $\epsilon_r = 34.187$; $\rho = 1.000$ g/cm³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.63,4.63,4.63); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5200 MHz/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_24.1C_liq_temp_23.8C/Area Scan (101x101x1): Interpolated grid:
dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.175 W/kg

Right-Hand-Side HSL - 802.11a_n 5200 MHz/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_24.1C_liq_temp_23.8C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.430 V/m; Power Drift = 0.00663 dB


Averaged SAR: SAR(1g) = 0.0793 W/kg; SAR(10g) = 0.0323 W/kg
Maximum value of SAR (interpolated) = 0.276 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

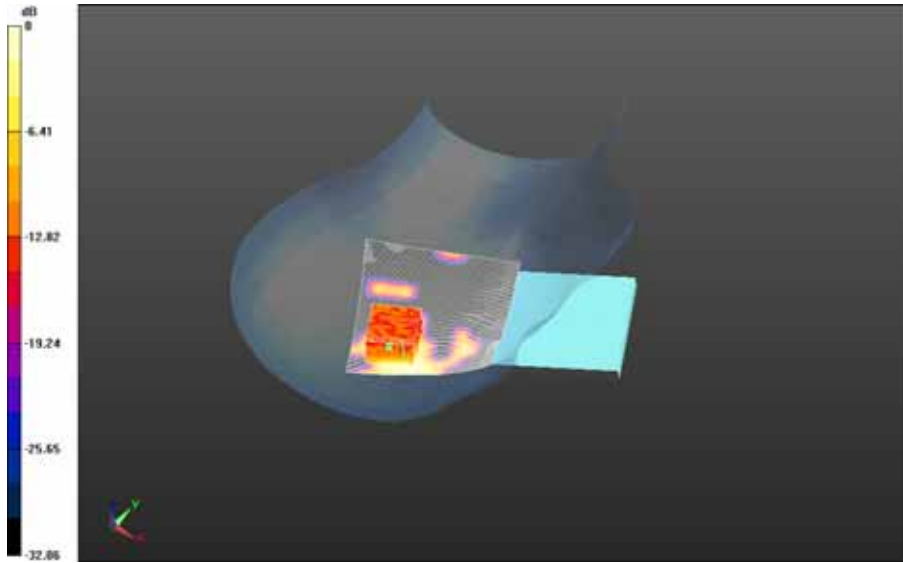


0 dB = 0.154 W/kg = -8.12 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 84(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Right-Hand-Side HSL - 802.11a_n 5200 MHz/Touch Position - 802.11a_n_U-NII-2A_chan62_amb_temp_24.1C_liq_temp_23.8C/Area Scan (101x101x1): Interpolated grid:
dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.157 W/kg

Right-Hand-Side HSL - 802.11a_n 5200 MHz/Touch Position - 802.11a_n_U-NII-2A_chan62_amb_temp_24.1C_liq_temp_23.8C/Zoom Scan (46x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.362 V/m; Power Drift = 0.153 dB

Averaged SAR: SAR(1g) = 0.0761 W/kg; SAR(10g) = 0.0303 W/kg
Maximum value of SAR (interpolated) = 0.269 W/kg

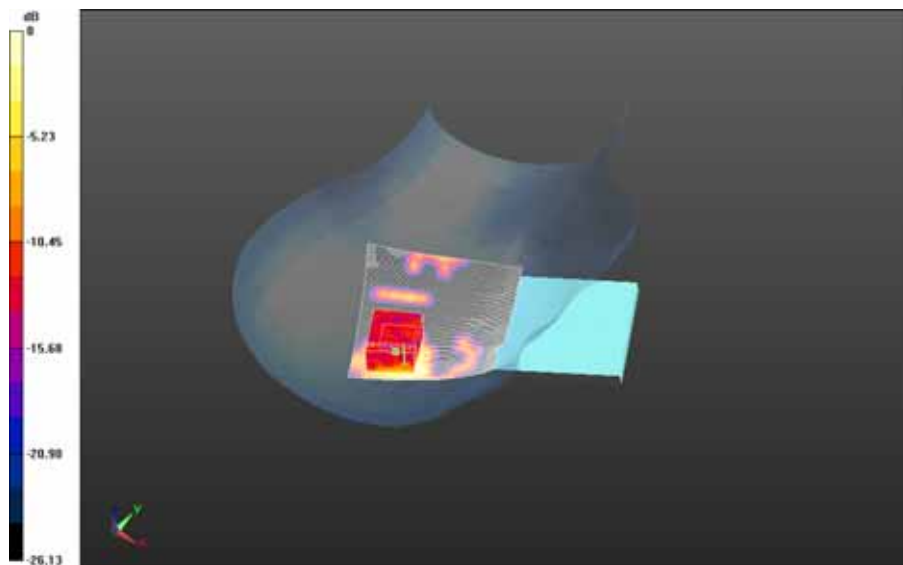


0 dB = 0.151 W/kg = -8.21 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 85(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Right-Hand-Side HSL - 802.11a_n 5200 MHz/Tilt Position - 802.11a-n_U-NII-2A_chan54_amb_temp_24.1C_liq_temp_23.8C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.196 W/kg

Right-Hand-Side HSL - 802.11a_n 5200 MHz/Tilt Position - 802.11a-n_U-NII-2A_chan54_amb_temp_24.1C_liq_temp_23.8C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.401 V/m; Power Drift = 0.294 dB

Averaged SAR: SAR(1g) = 0.0945 W/kg; SAR(10g) = 0.0358 W/kg
Maximum value of SAR (interpolated) = 0.346 W/kg

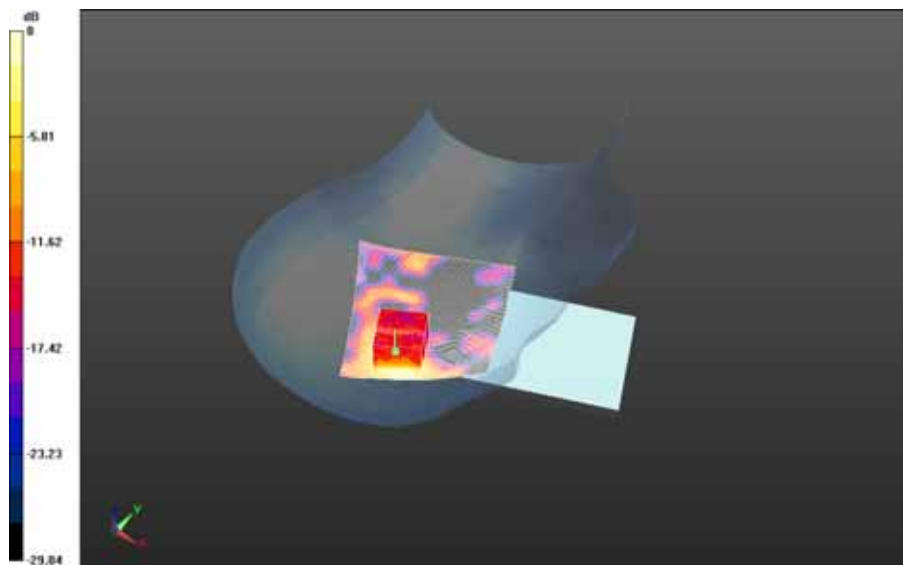

0 dB = 0.185 W/kg = -7.33 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		86(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/12/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5500 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5670 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5670 MHz; $\sigma = 5.275$ S/m; $\epsilon_r = 33.765$; $\rho = 1.000$ g/cm³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.2,4.2,4.2); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5500 MHz/Touch Position - 802.11a-n_U-NII-2C_chan134_amb_temp_24.1C_liq_temp_22.8C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.118 W/kg

Right-Hand-Side HSL - 802.11a_n 5500 MHz/Touch Position - 802.11a-n_U-NII-2C_chan134_amb_temp_24.1C_liq_temp_22.8C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.805 V/m; Power Drift = 0.539 dB


Averaged SAR: SAR(1g) = 0.0499 W/kg; SAR(10g) = 0.0189 W/kg
 Maximum value of SAR (interpolated) = 0.205 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

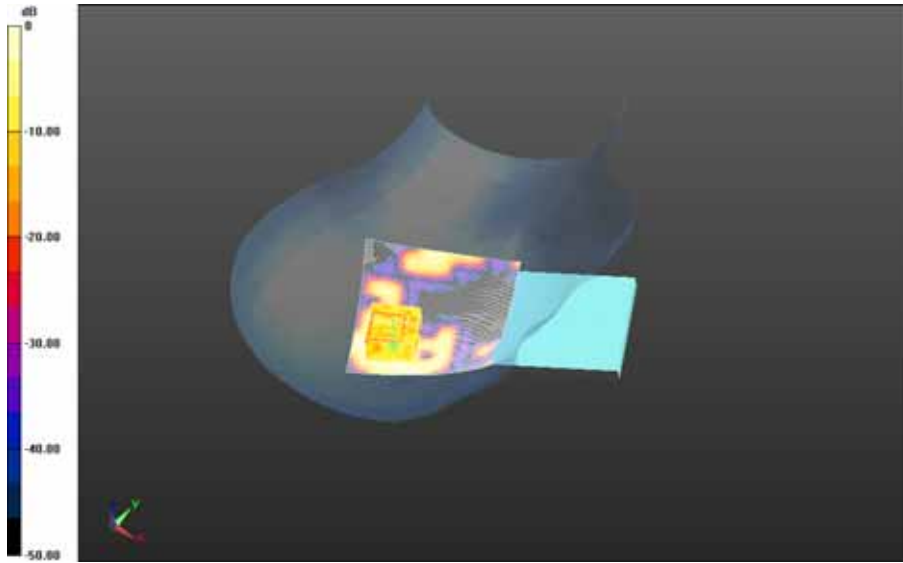

0 dB = 0.0914 W/kg = -10.39 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		88(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/12/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5800 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5755 MHz; $\sigma = 5.421$ S/m; $\epsilon_r = 33.827$; $\rho = 1.000$ g/cm³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.34,4.34,4.34); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5800 MHz/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_24.1C_liq_temp_23.8C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.150 W/kg

Right-Hand-Side HSL - 802.11a_n 5800 MHz/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_24.1C_liq_temp_23.8C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 3.996 V/m; Power Drift = 0.024 dB


Averaged SAR: SAR(1g) = 0.0651 W/kg; SAR(10g) = 0.0244 W/kg
 Maximum value of SAR (interpolated) = 0.364 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

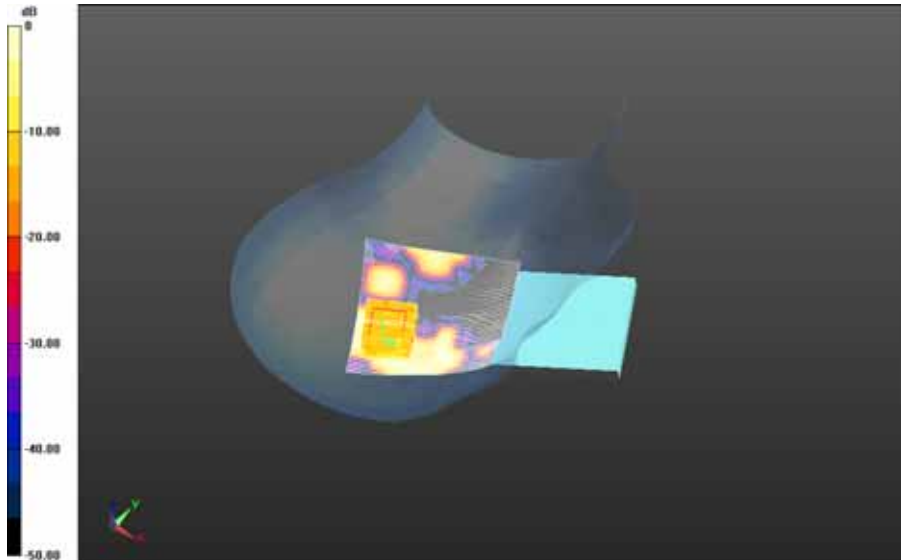

0 dB = 0.127 W/kg = -8.96 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		90(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/12/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11a_n 5200 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5270 MHz; $\sigma = 4.798$ S/m; $\epsilon_r = 34.187$; $\rho = 1.000$ g/cm³
 Phantom section: Left Section


DASY Configuration:


- Probe: EX3DV4 - SN3592; ConvF: (4.63,4.63,4.63); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5200 MHz/Touch Position - 802.11a-n_U-NII-2A_chan54_temp_24.2C_liq_temp_23.7C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.159 W/kg


Left-Hand-Side HSL - 802.11a_n 5200 MHz/Touch Position - 802.11a-n_U-NII-2A_chan54_temp_24.2C_liq_temp_23.7C/Zoom Scan (36x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 2.790 V/m; Power Drift = -0.00754 dB

Averaged SAR: SAR(1g) = 0.0874 W/kg; SAR(10g) = 0.0346 W/kg
 Maximum value of SAR (interpolated) = 0.312 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3	Page 91(164)	
Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

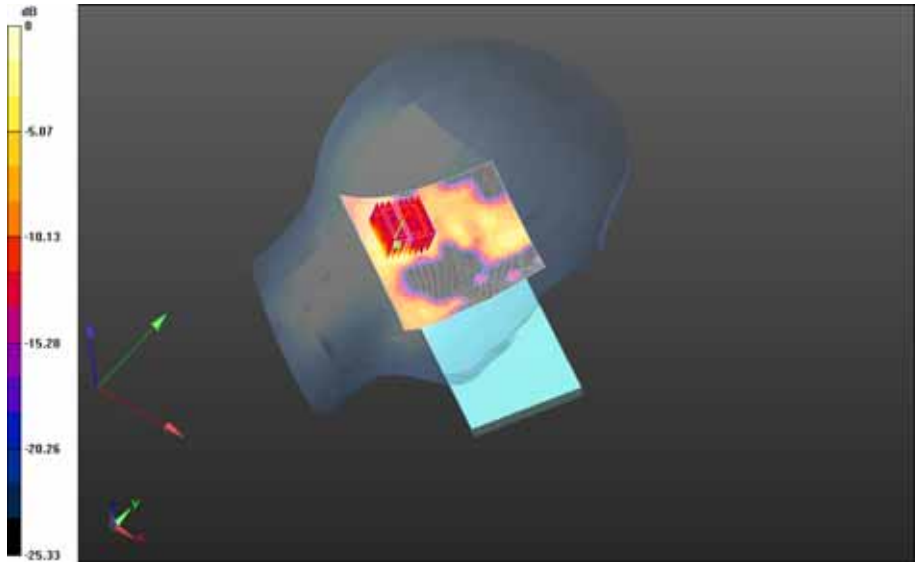


0 dB = 0.160 W/kg = -7.96 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		92(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	


Left-Hand-Side HSL - 802.11a_n 5200 MHz/Tilt Position -802.11a-n_U-NII-2A_chan54_amb_temp_23.9C_liq_temp_23.3C/Area Scan (161x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.198 W/kg

Left-Hand-Side HSL - 802.11a_n 5200 MHz/Tilt Position -802.11a-n_U-NII-2A_chan54_amb_temp_23.9C_liq_temp_23.3C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.244 V/m; Power Drift = -0.091 dB

Averaged SAR: SAR(1g) = 0.109 W/kg; SAR(10g) = 0.0411 W/kg
Maximum value of SAR (interpolated) = 0.403 W/kg

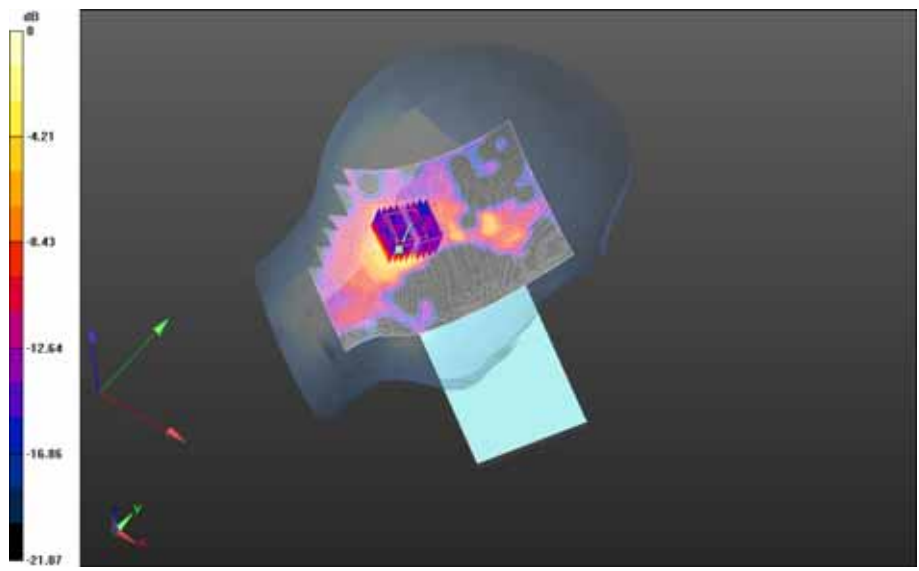

0 dB = 0.204 W/kg = -6.90 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		93(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/14/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11a_n 5500 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5670 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5670 MHz; $\sigma = 5.289$ S/m; $\epsilon_r = 33.890$; $\rho = 1.000$ g/cm³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.2,4.2,4.2); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5500 MHz/Touch Position - 802.11a-n_U-NII-

2C_chan134_amb_temp_23.9C_liq_temp_21.7C 3/Area Scan (101x101x1): Interpolated grid:
 dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.105 W/kg

Left-Hand-Side HSL - 802.11a_n 5500 MHz/Touch Position - 802.11a-n_U-NII-

2C_chan134_amb_temp_23.9C_liq_temp_21.7C 3/Zoom Scan (41x41x61)/Cube 0: Interpolated
 grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 2.026 V/m; Power Drift = 0.511 dB

Averaged SAR: SAR(1g) = 0.0477 W/kg; SAR(10g) = 0.0196 W/kg


Maximum value of SAR (interpolated) = 0.186 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

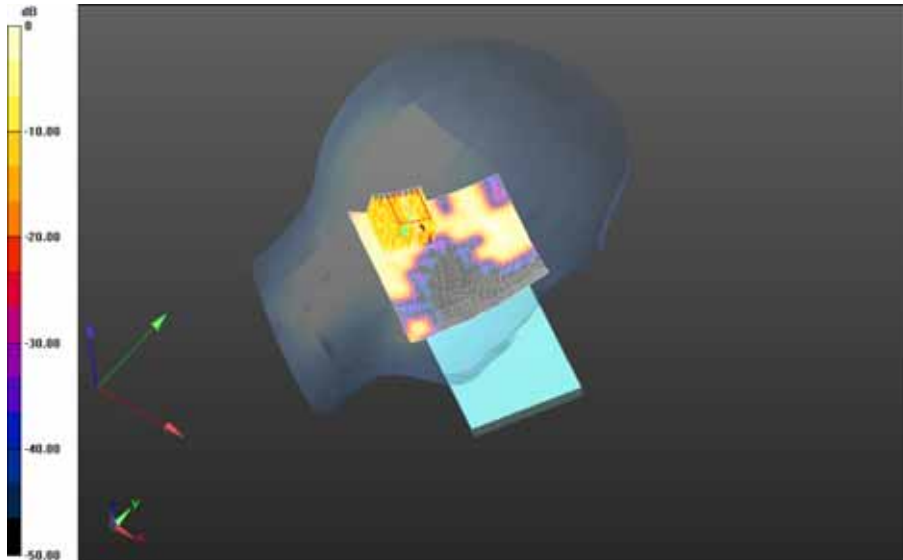

0 dB = 0.0914 W/kg = -10.39 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		95(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/14/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11a_n 5800 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5755 MHz; $\sigma = 5.421$ S/m; $\epsilon_r = 33.827$; $\rho = 1.000$ g/cm³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.34,4.34,4.34); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5800 MHz/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_22.5C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.160 W/kg

Left-Hand-Side HSL - 802.11a_n 5800 MHz/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_22.5C/Zoom Scan (36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.826 V/m; Power Drift = 0.297 dB


Averaged SAR: SAR(1g) = 0.0730 W/kg; SAR(10g) = 0.0282 W/kg
 Maximum value of SAR (interpolated) = 0.351 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

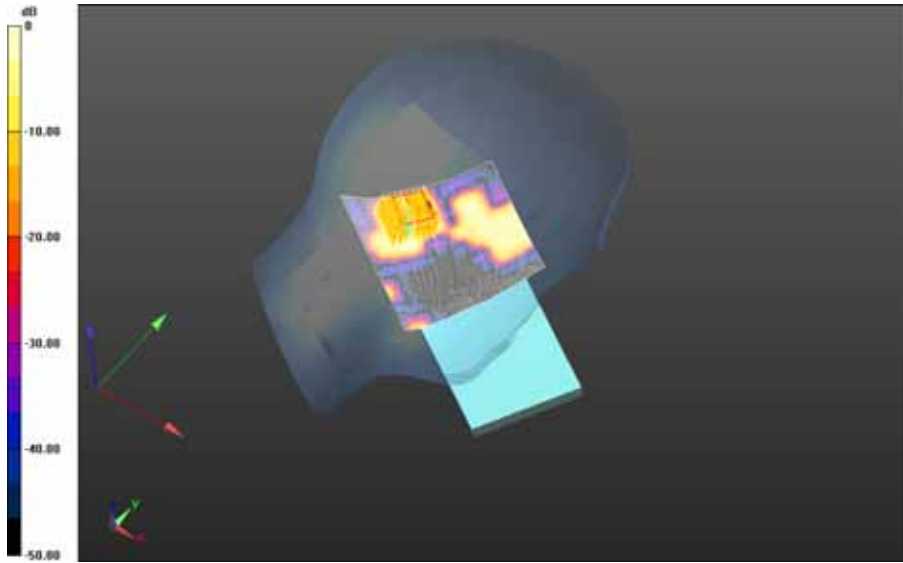

0 dB = 0.134 W/kg = -8.73 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		97(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/14/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5270 MHz; $\sigma = 4.811$ S/m; $\epsilon_r = 34.597$; $\rho = 1.000$ g/cm³
 Phantom section: Right Section


DASY Configuration:


- Probe: EX3DV4 - SN3592; ConvF: (4.63,4.63,4.63); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_23.41C_liq_temp_22.5C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.154 W/kg


Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_23.41C_liq_temp_22.5C/Zoom Scan (46x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.352 V/m; Power Drift = 0.567 dB

Averaged SAR: SAR(1g) = 0.104 W/kg; SAR(10g) = 0.0325 W/kg
 Maximum value of SAR (interpolated) = 0.695 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 98(164)
Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

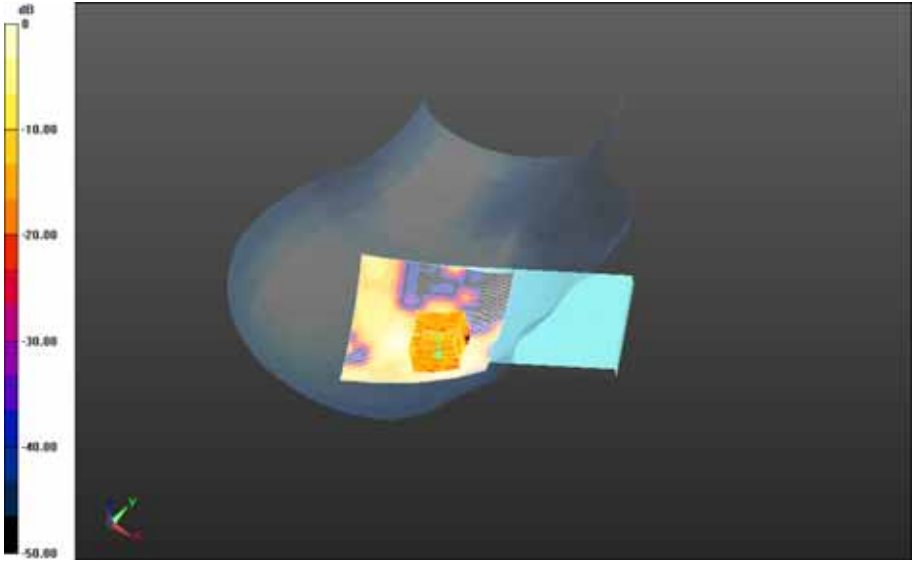


0 dB = 0.157 W/kg = -8.04 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		99(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	


Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Tilt Position - 802.11a-n_U-NII-2A_chan54_amb_temp_24.1C_liq_temp_22.6C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.137 W/kg

Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Tilt Position - 802.11a-n_U-NII-2A_chan54_amb_temp_24.1C_liq_temp_22.6C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.415 V/m; Power Drift = -0.165 dB

Averaged SAR: SAR(1g) = 0.0830 W/kg; SAR(10g) = 0.0277 W/kg
Maximum value of SAR (interpolated) = 0.370 W/kg

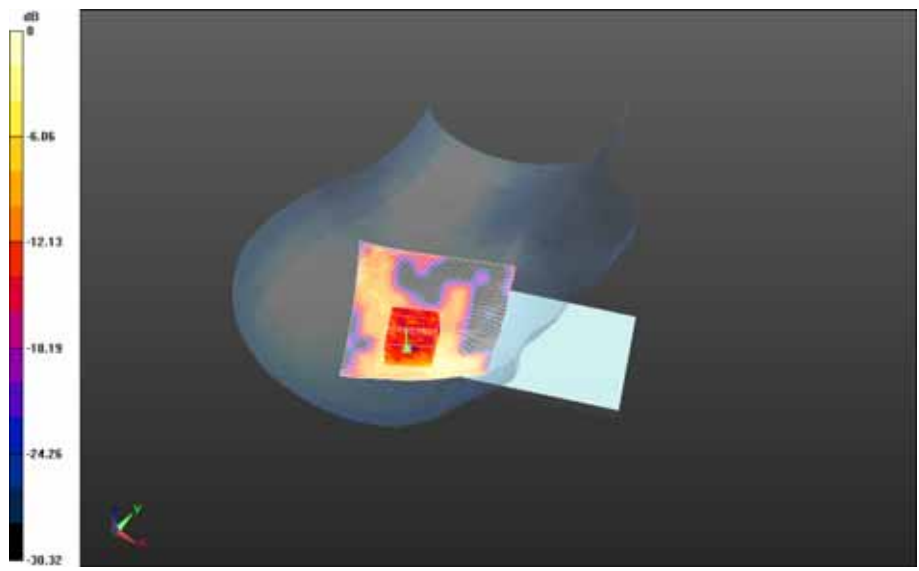

0 dB = 0.155 W/kg = -8.10 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		100(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/12/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5270 MHz; $\sigma = 4.798$ S/m; $\epsilon_r = 34.187$; $\rho = 1.000$ g/cm³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.63,4.63,4.63); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-2A_chan54_temp_24.2C_liq_temp_23.7C/Area Scan (141x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0917 W/kg

Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-2A_chan54_temp_24.2C_liq_temp_23.7C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.448 V/m; Power Drift = 0.036 dB


Averaged SAR: SAR(1g) = 0.0317 W/kg; SAR(10g) = 0.0106 W/kg
 Maximum value of SAR (interpolated) = 0.206 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

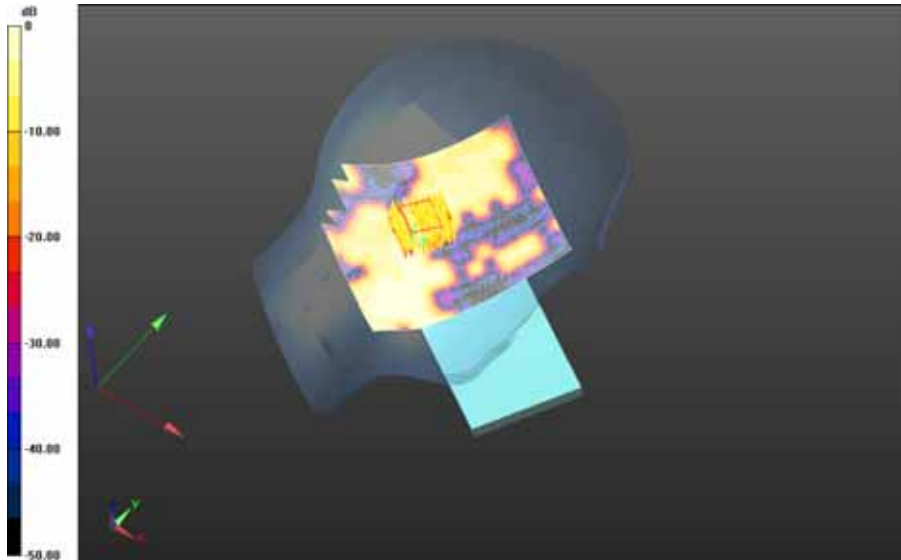


0 dB = 0.0596 W/kg = -12.25 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 102(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Tilt Position -802.11a-n_U-NII-2A_chan54_amb_temp_23.8C_liq_temp_23.0C/Area Scan (161x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.104 W/kg

Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Open/Tilt Position -802.11a-n_U-NII-2A_chan54_amb_temp_23.8C_liq_temp_23.0C/Zoom Scan (56x51x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.890 V/m; Power Drift = 0.301 dB

Averaged SAR: SAR(1g) = 0.0531 W/kg; SAR(10g) = 0.0200 W/kg
Maximum value of SAR (interpolated) = 0.192 W/kg

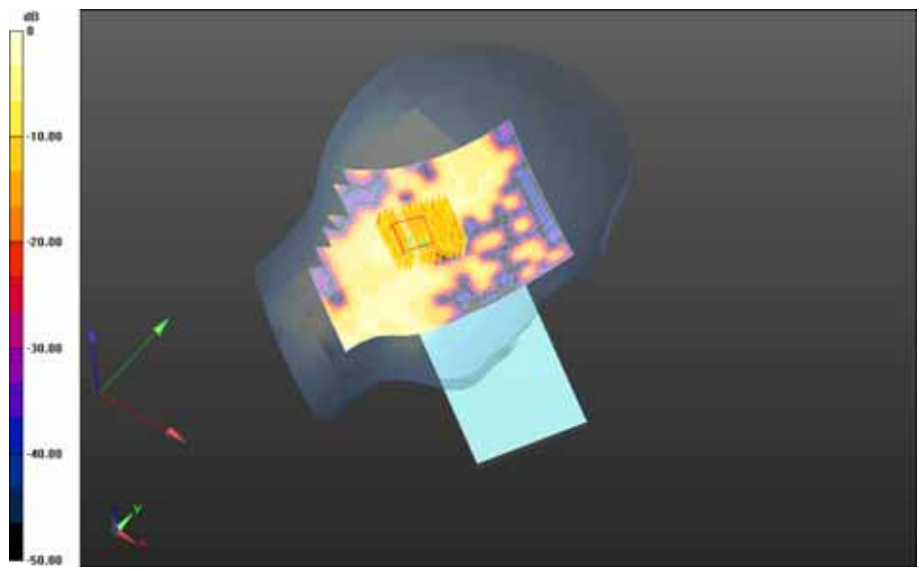

0 dB = 0.0993 W/kg = -10.03 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		103(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5230 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: $f=5230$ MHz; $\sigma = 5.594$ S/m; $\epsilon_r = 46.738$; $\rho = 1.000$ g/cm³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-1_chan46_Amb_Temp_24.2C_Liquid_Temp_22.2C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.220 W/kg

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-1_chan46_Amb_Temp_24.2C_Liquid_Temp_22.2C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.731 V/m; Power Drift = 0.080 dB


Averaged SAR: SAR(1g) = 0.107 W/kg; SAR(10g) = 0.0371 W/kg
 Maximum value of SAR (interpolated) = 0.378 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

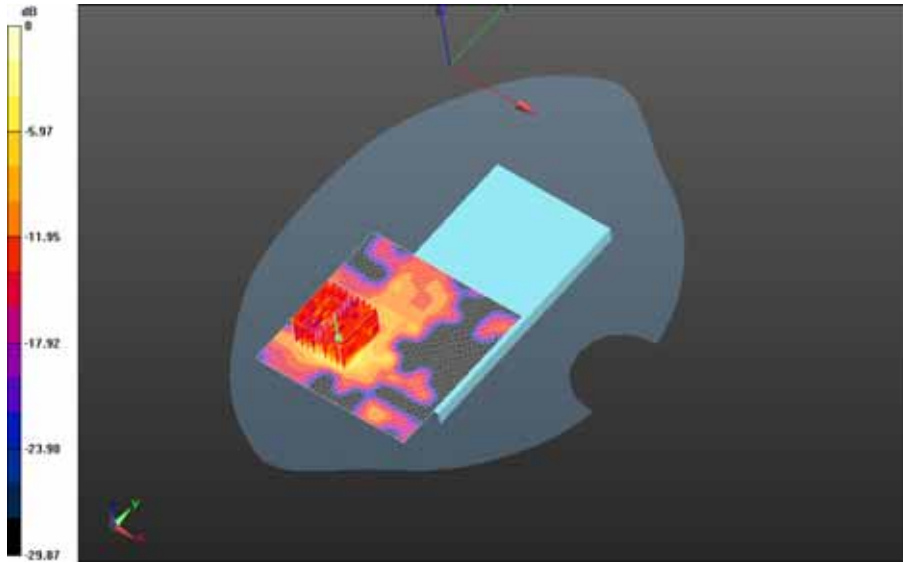

0 dB = 0.211 W/kg = -6.76 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 105(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Date: 9/10/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5755 MHz; $\sigma = 6.216$ S/m; $\epsilon_r = 46.419$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.81,3.81,3.81); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_24.0C_Liquid_Temp_22.5C/Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.214 W/kg

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_24.0C_Liquid_Temp_22.5C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.712 V/m; Power Drift = 0.412 dB


Averaged SAR: SAR(1g) = 0.0891 W/kg; SAR(10g) = 0.0325 W/kg
Maximum value of SAR (interpolated) = 0.349 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

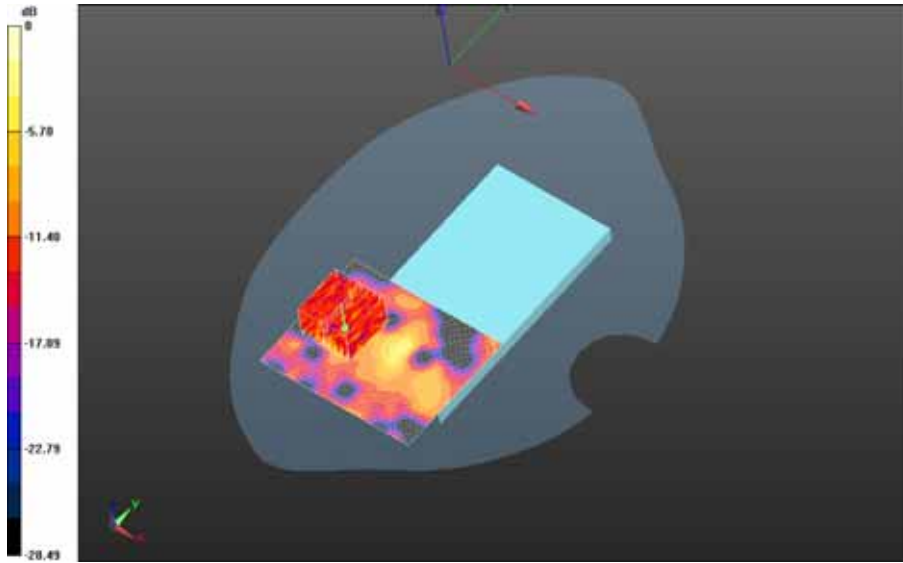

0 dB = 0.188 W/kg = -7.26 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 107(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5190 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5190 MHz; $\sigma = 5.552$ S/m; $\epsilon_r = 46.851$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-1_chan38_Amb_Temp_23.4C_Liquid_Temp_22.3C/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.270 W/kg

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-1_chan38_Amb_Temp_23.4C_Liquid_Temp_22.3C/Zoom Scan (36x36x61)/Cube 0:
Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.784 V/m; Power Drift = 0.00182 dB


Averaged SAR: SAR(1g) = 0.133 W/kg; SAR(10g) = 0.0456 W/kg
Maximum value of SAR (interpolated) = 0.473 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

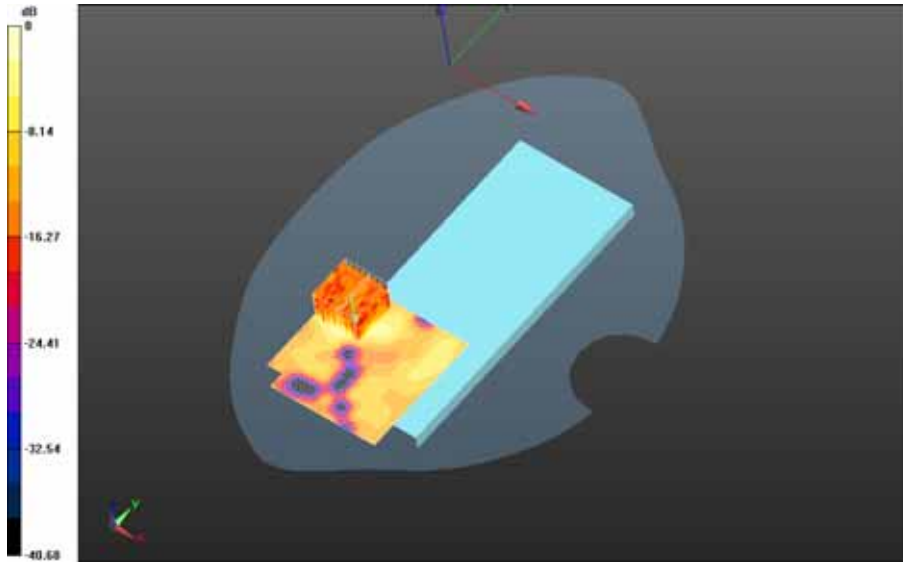


0 dB = 0.267 W/kg = -5.73 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 109(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-1_chan46_Amb_Temp_23.3C_Liquid_Temp_22.3C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.289 W/kg

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-1_chan46_Amb_Temp_23.3C_Liquid_Temp_22.3C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.733 V/m; Power Drift = 0.203 dB

Averaged SAR: SAR(1g) = 0.125 W/kg; SAR(10g) = 0.0451 W/kg
 Maximum value of SAR (interpolated) = 0.515 W/kg

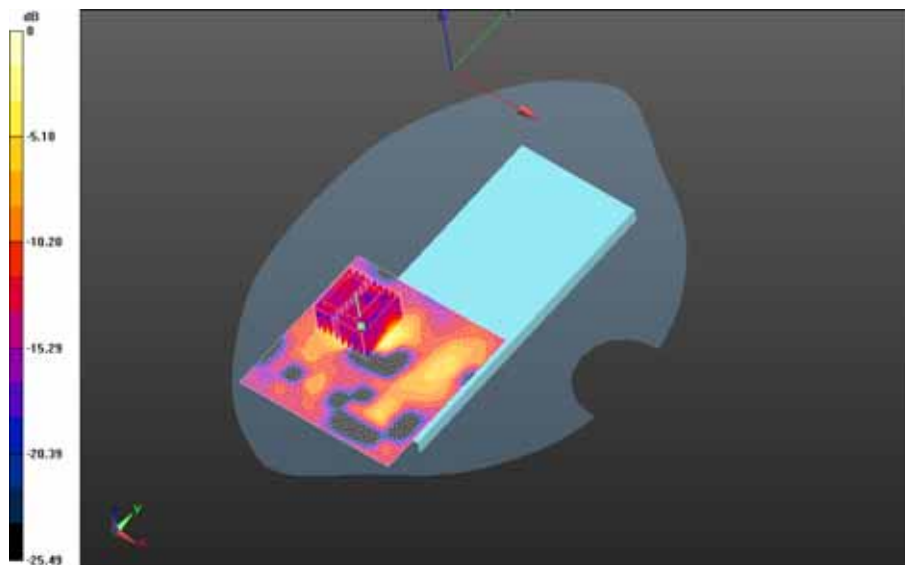


0 dB = 0.229 W/kg = -6.40 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 110(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Front - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.0C_Liquid_Temp_22.0C/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0249 W/kg
1g avg. SAR maximum on border.
10g avg. SAR maximum on border.

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Front - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.0C_Liquid_Temp_22.0C/Zoom Scan (51x46x61)/Cube 0:
Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.724 V/m; Power Drift = 0.550 dB

Averaged SAR: SAR(1g) = 0.0109 W/kg; SAR(10g) = 0.00689 W/kg
Maximum value of SAR (interpolated) = 0.0978 W/kg

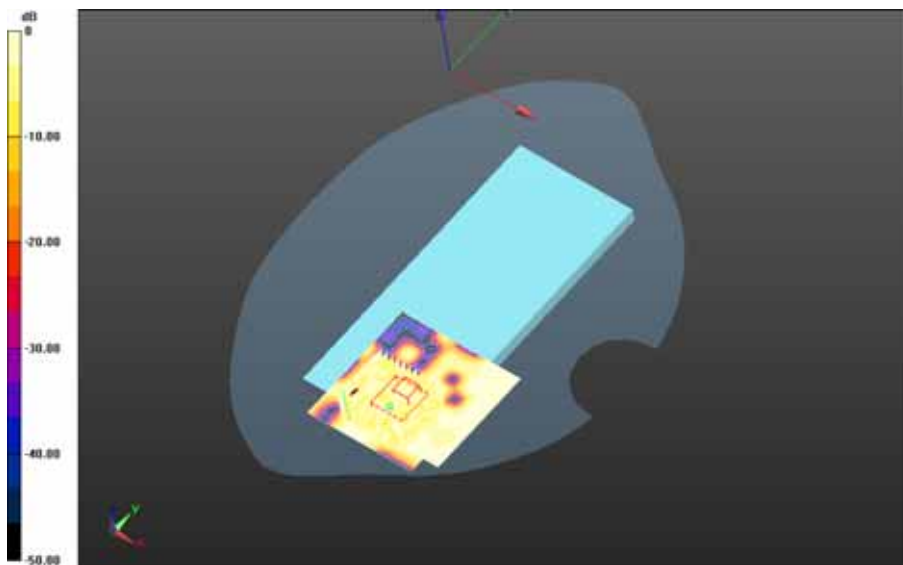


0 dB = 0.0206 W/kg = -16.86 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 111(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Left - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.1C_Liquid_Temp_22.1C/Area Scan (31x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.210 W/kg
[10g avg. SAR maximum on border.](#)

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Left - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.1C_Liquid_Temp_22.1C/Zoom Scan (41x41x61)/Cube 0:
 Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 2.298 V/m; Power Drift = -0.039 dB

Averaged SAR: SAR(1g) = 0.108 W/kg; SAR(10g) = 0.0402 W/kg
 Maximum value of SAR (interpolated) = 0.413 W/kg

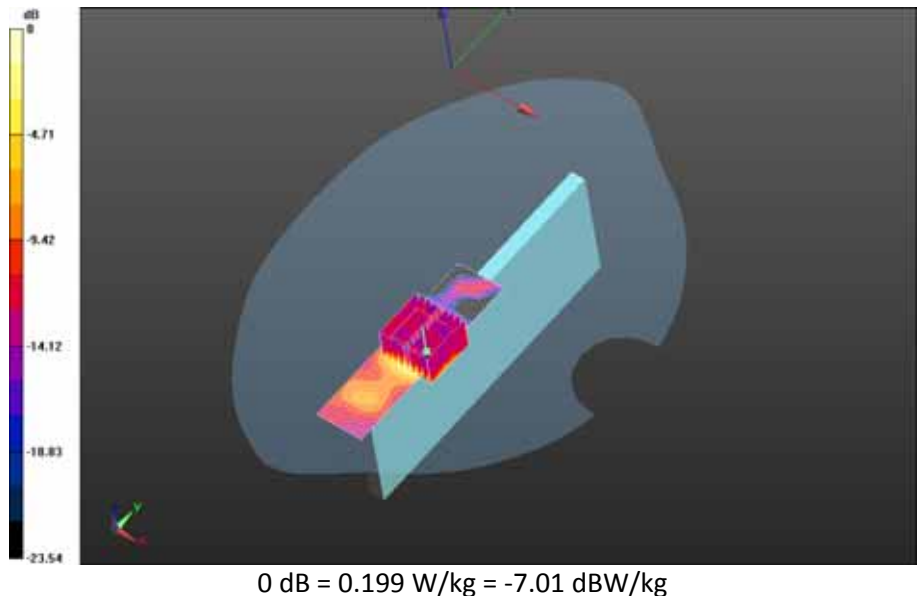


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 112(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Top - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.1C_Liquid_Temp_22.1C/Area Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0237 W/kg
[1g avg. SAR maximum on border.](#)
[10g avg. SAR maximum on border.](#)

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Top - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.1C_Liquid_Temp_22.1C/Zoom Scan (46x41x61)/Cube 0:
Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.827 V/m; Power Drift = -0.119 dB

Averaged SAR: SAR(1g) = 0.0161 W/kg; SAR(10g) = 0.0106 W/kg
Maximum value of SAR (interpolated) = 0.0977 W/kg

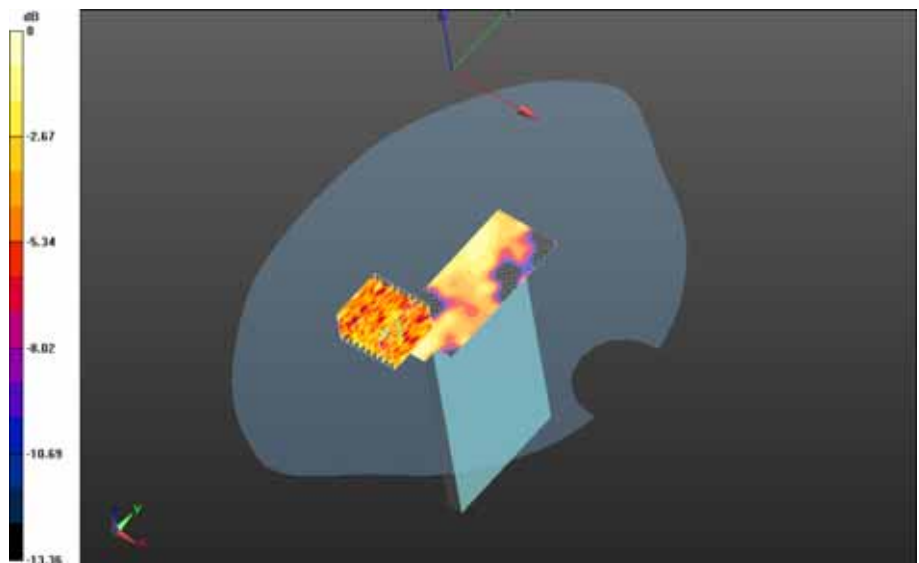

0 dB = 0.0247 W/kg = -16.07 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 113(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Date: 9/10/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5755 MHz; $\sigma = 6.216$ S/m; $\epsilon_r = 46.419$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.81,3.81,3.81); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_23.6C_Liquid_Temp_22.5C/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.247 W/kg

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_23.6C_Liquid_Temp_22.5C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.876 V/m; Power Drift = 0.064 dB


Averaged SAR: SAR(1g) = 0.116 W/kg; SAR(10g) = 0.0407 W/kg
Maximum value of SAR (interpolated) = 0.459 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

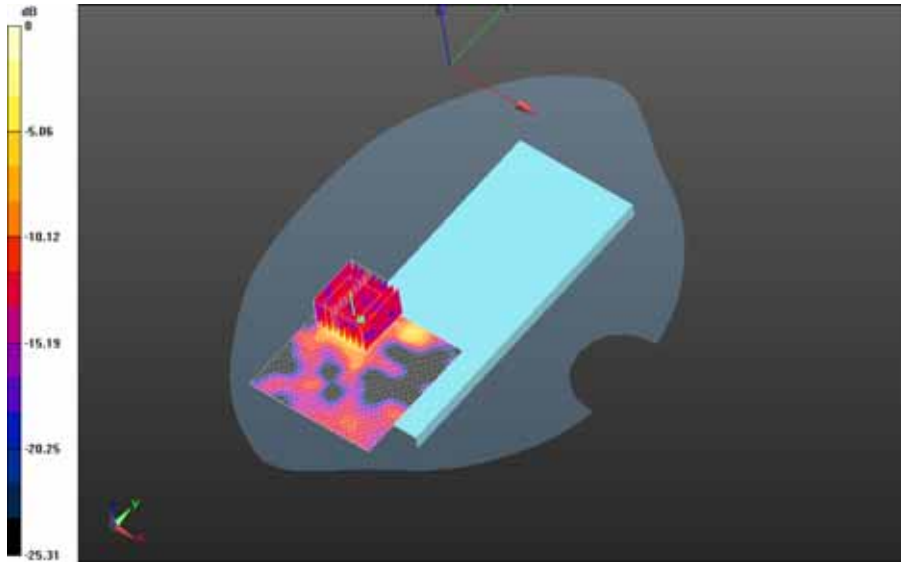

0 dB = 0.229 W/kg = -6.40 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		115(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/10/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Body Worn MSL - 802.11a_n 5200 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5270 MHz; $\sigma = 5.645$ S/m; $\epsilon_r = 46.642$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan54_Amb_Temp_24.1C_Liquid_Temp_23.2C/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.394 W/kg

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan54_Amb_Temp_24.1C_Liquid_Temp_23.2C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.959 V/m; Power Drift = 0.132 dB


Averaged SAR: SAR(1g) = 0.219 W/kg; SAR(10g) = 0.0867 W/kg
Maximum value of SAR (interpolated) = 0.863 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

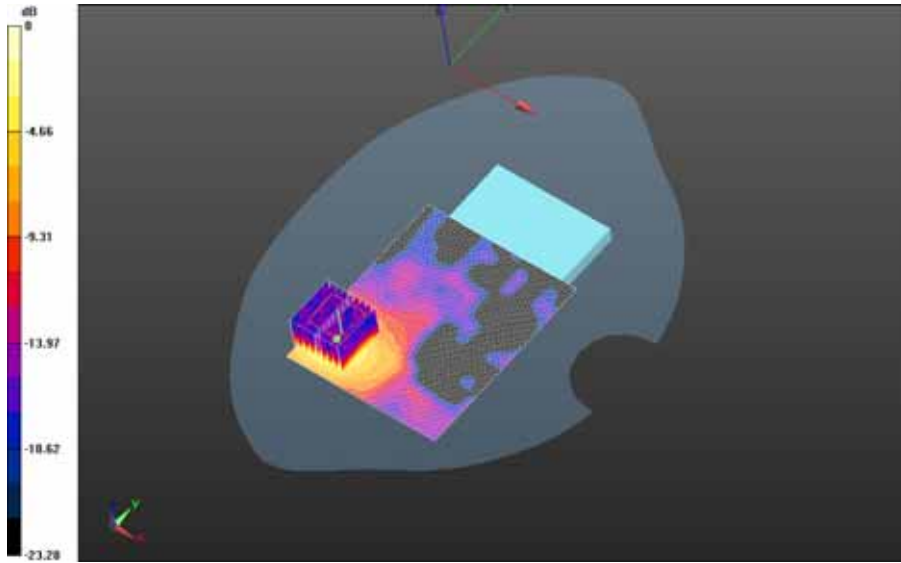


0 dB = 0.389 W/kg = -4.10 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 117(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.6C_Liquid_Temp_22.2C/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.499 W/kg

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.6C_Liquid_Temp_22.2C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 2.259 V/m; Power Drift = -0.050 dB

Averaged SAR: SAR(1g) = 0.274 W/kg; SAR(10g) = 0.106 W/kg
 Maximum value of SAR (interpolated) = 0.999 W/kg

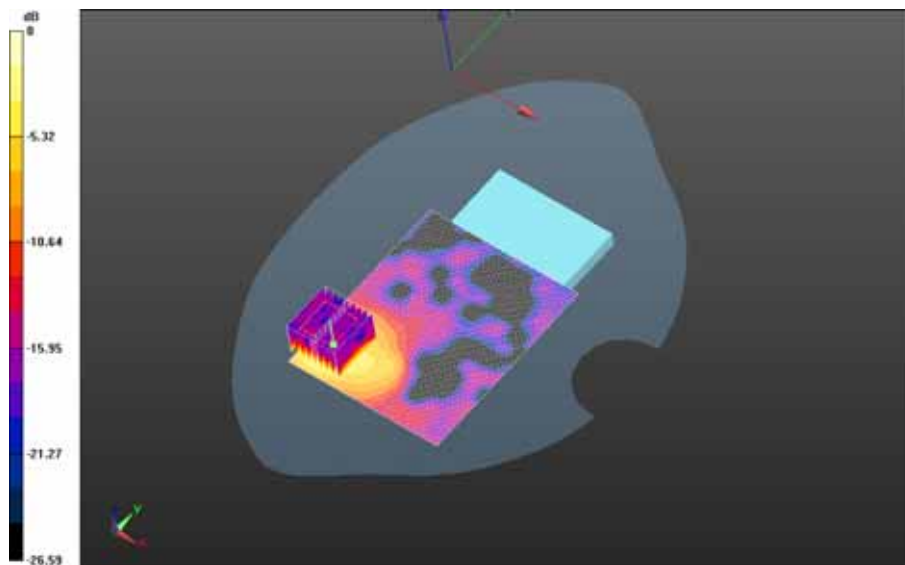


0 dB = 0.509 W/kg = -2.93 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 118(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Front - 802.11a-n_U-NII-2A_chan62_Amb_Temp_24.1C_Liquid_Temp_22.3C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0506 W/kg
[10g avg. SAR maximum on border.](#)

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Front - 802.11a-n_U-NII-2A_chan62_Amb_Temp_24.1C_Liquid_Temp_22.3C/Zoom Scan (41x46x61)/Cube 0:
 Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.985 V/m; Power Drift = 0.147 dB

Averaged SAR: SAR(1g) = 0.0300 W/kg; SAR(10g) = 0.0174 W/kg
 Maximum value of SAR (interpolated) = 0.0893 W/kg

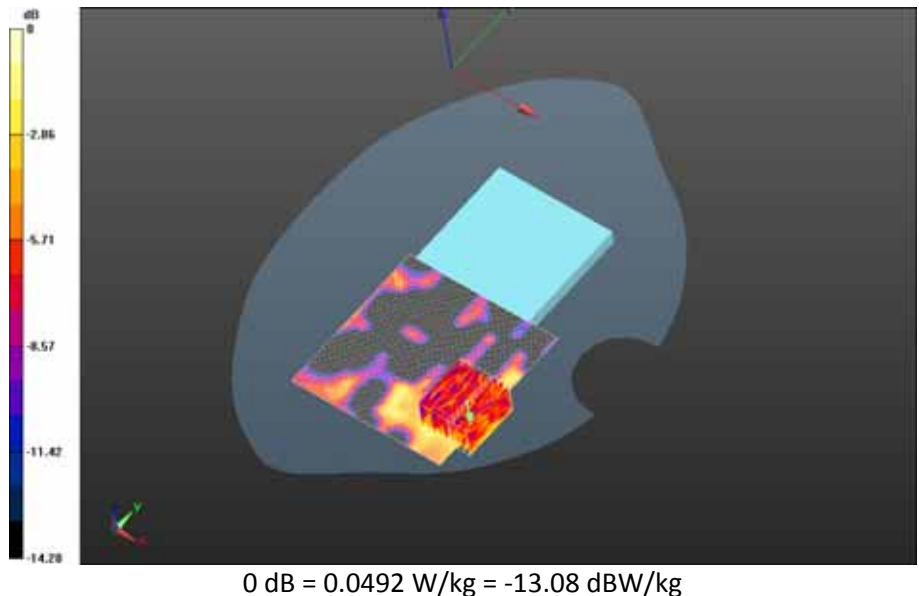


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		119(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	


Body Worn MSL - 802.11a_n 5200 MHz/Holster Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.9C_Liquid_Temp_22.5C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.469 W/kg

Body Worn MSL - 802.11a_n 5200 MHz/Holster Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.9C_Liquid_Temp_22.5C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 3.909 V/m; Power Drift = 0.178 dB

Averaged SAR: SAR(1g) = 0.264 W/kg; SAR(10g) = 0.108 W/kg
Maximum value of SAR (interpolated) = 0.974 W/kg

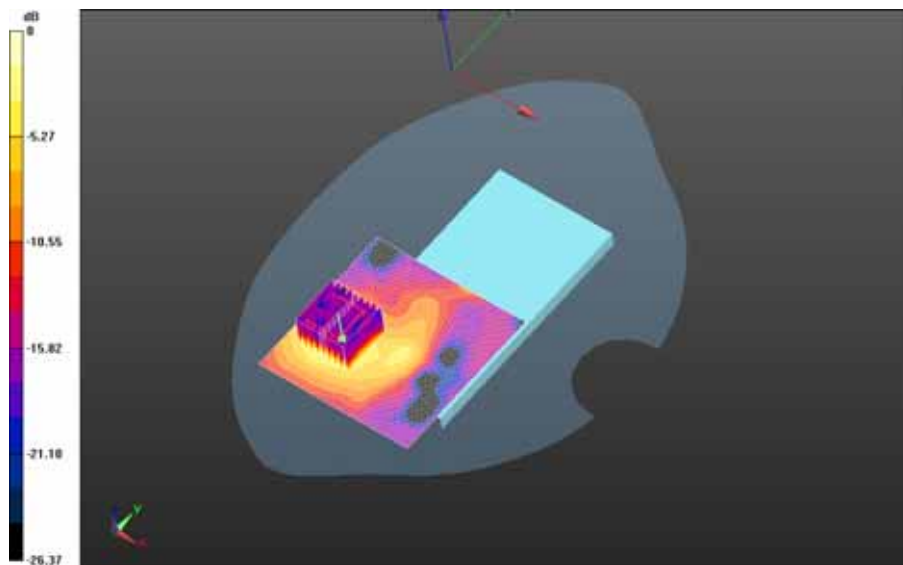

0 dB = 0.479 W/kg = -3.20 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		120(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/9/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Body Worn MSL - 802.11a_n 5500 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5670 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5670 MHz; $\sigma = 6.094$ S/m; $\epsilon_r = 46.519$; $\rho = 1.000$ g/cm³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.78,3.78,3.78); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11a_n 5500 MHz/15mm Device Back - 802.11a-n_U-NII-2C_chan134_Amb_Temp_23.5C_Liquid_Temp_22.4C/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.283 W/kg

Body Worn MSL - 802.11a_n 5500 MHz/15mm Device Back - 802.11a-n_U-NII-2C_chan134_Amb_Temp_23.5C_Liquid_Temp_22.4C/Zoom Scan (36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 2.130 V/m; Power Drift = 0.045 dB


Averaged SAR: SAR(1g) = 0.141 W/kg; SAR(10g) = 0.0592 W/kg
 Maximum value of SAR (interpolated) = 0.586 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

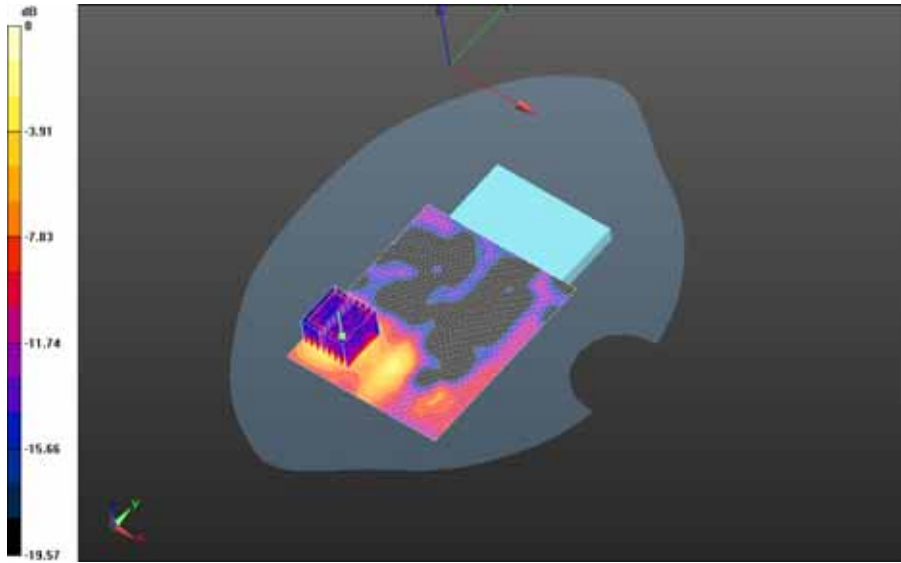

0 dB = 0.259 W/kg = -5.87 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 122(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Date: 9/9/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Body Worn MSL - 802.11a_n 5800 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5755 MHz; $\sigma = 6.216$ S/m; $\epsilon_r = 46.419$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.81,3.81,3.81); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11a_n 5800 MHz/15mm Device Back - 802.11a_n_U-NII-3_chan151_Amb_Temp_23.5C_Liquid_Temp_22.2C/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.439 W/kg

Body Worn MSL - 802.11a_n 5800 MHz/15mm Device Back - 802.11a_n_U-NII-3_chan151_Amb_Temp_23.5C_Liquid_Temp_22.2C/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.815 V/m; Power Drift = -0.151 dB


Averaged SAR: SAR(1g) = 0.232 W/kg; SAR(10g) = 0.0847 W/kg
Maximum value of SAR (interpolated) = 0.989 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

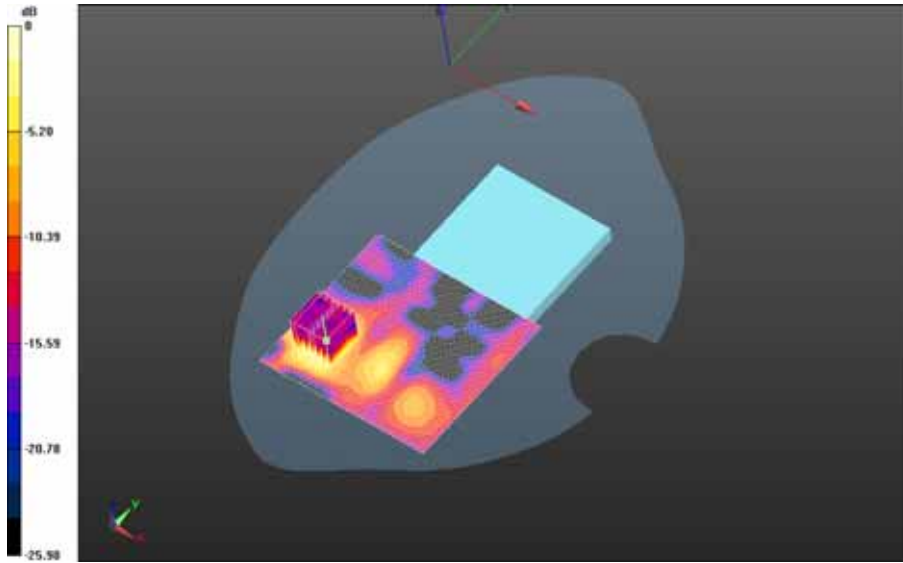

0 dB = 0.431 W/kg = -3.66 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 124(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

802.11a/n (Secondary Antenna_Core 1)

Date: 9/14/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: $f=5270$ MHz; $\sigma = 4.811$ S/m; $\epsilon_r = 34.597$; $\rho = 1.000$ g/cm³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.63,4.63,4.63); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_23.8C_liq_temp_22.2C/Area Scan (101x101x1):

Interpolated grid:
dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0167 W/kg

Right-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_23.8C_liq_temp_22.2C/Zoom Scan (41x41x61)/Cube 0:

Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 1.182 V/m; Power Drift = 0.233 dB

Averaged SAR: SAR(1g) = 0.00685 W/kg; SAR(10g) = 0.00443 W/kg


Maximum value of SAR (interpolated) = 0.0566 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

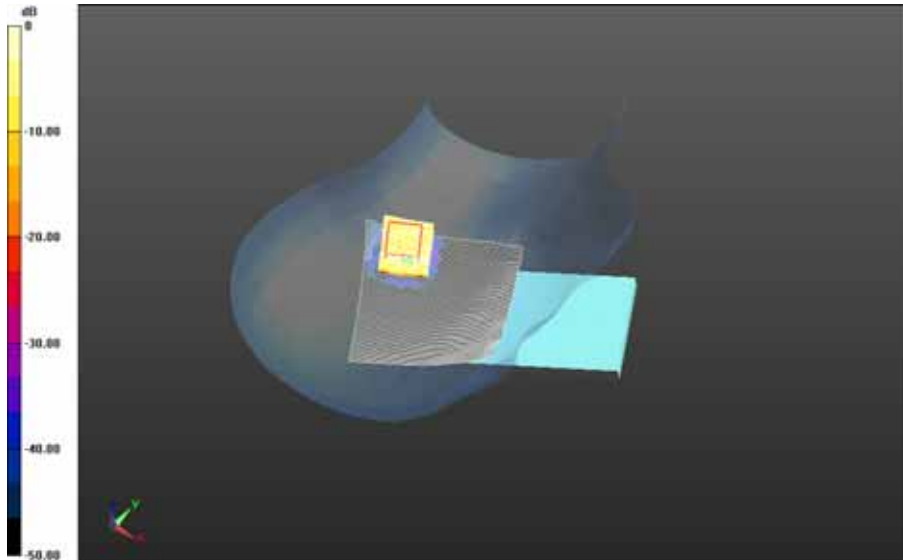

0 dB = 0.0165 W/kg = -17.83 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		126(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/15/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5500 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5510 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5510 MHz; $\sigma = 5.095$ S/m; $\epsilon_r = 34.185$; $\rho = 1.000$ g/cm³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.2,4.2,4.2); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5500 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2C_chan102_amb_temp_23.7C_liq_temp_21.6C/Area Scan (111x91x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0116 W/kg

[10g avg. SAR maximum on border.](#)

Right-Hand-Side HSL - 802.11a_n 5500 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2C_chan102_amb_temp_23.7C_liq_temp_21.6C/Zoom Scan (41x41x61)/Cube 0: Interpolated

grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 1.336 V/m; Power Drift = 0.594 dB

Averaged SAR: SAR(1g) = 0.00919 W/kg; SAR(10g) = 0.00670 W/kg


Maximum value of SAR (interpolated) = 0.0728 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

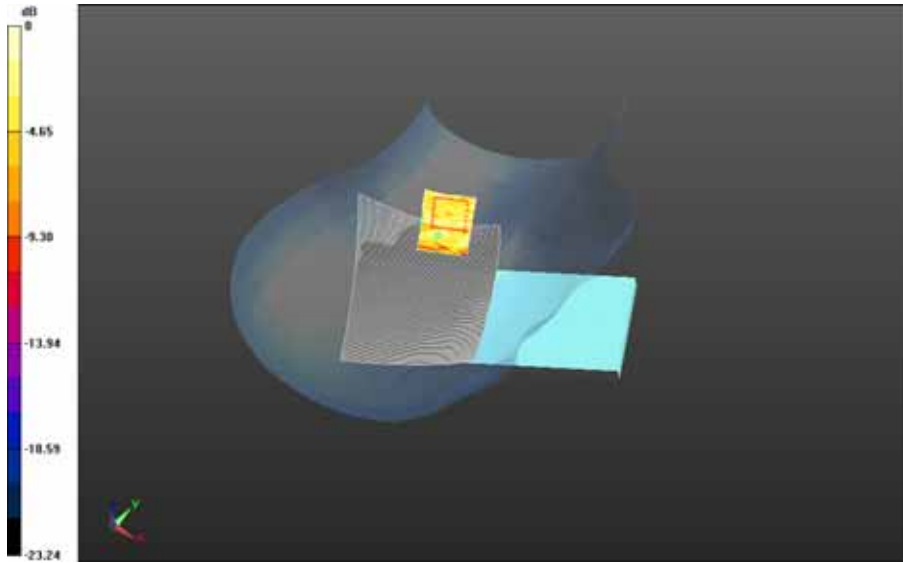

0 dB = 0.0179 W/kg = -17.47 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		128(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/15/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5755 MHz; $\sigma = 5.381$ S/m; $\epsilon_r = 33.753$; $\rho = 1.000$ g/cm³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.34,4.34,4.34); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_21.6C/Area Scan (111x81x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0791 W/kg

Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_21.6C/Zoom Scan (46x46x61)/Cube 0: Interpolated

grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 1.786 V/m; Power Drift = 0.081 dB

Averaged SAR: SAR(1g) = 0.0183 W/kg; SAR(10g) = 0.00947 W/kg


Maximum value of SAR (interpolated) = 0.0838 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

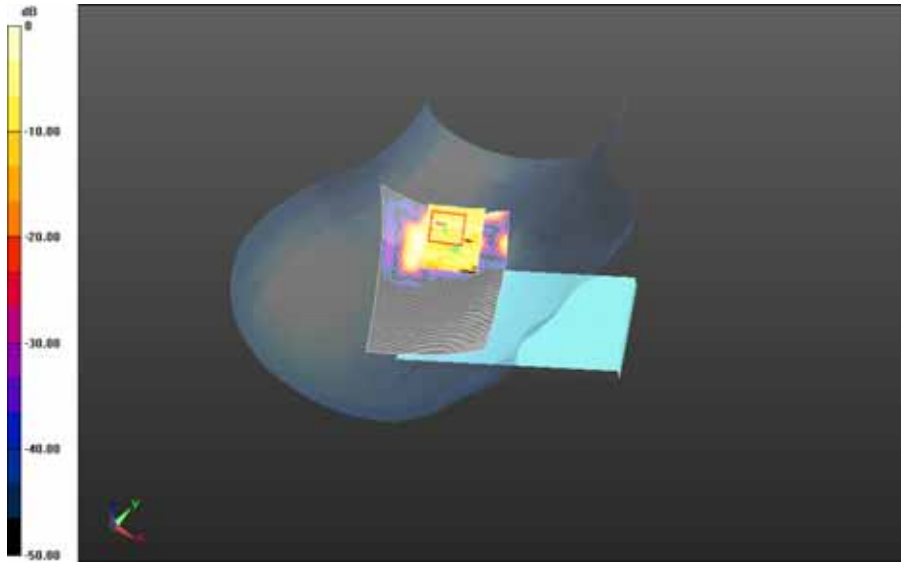


0 dB = 0.0328 W/kg = -14.84 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 130(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Tilt Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.5C_liq_temp_22.3C/Area Scan (111x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0420 W/kg

Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Tilt Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.5C_liq_temp_22.3C/Zoom Scan (36x46x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.422 V/m; Power Drift = 1.342 dB

Averaged SAR: SAR(1g) = 0.0179 W/kg; SAR(10g) = 0.0104 W/kg
 Maximum value of SAR (interpolated) = 0.0771 W/kg

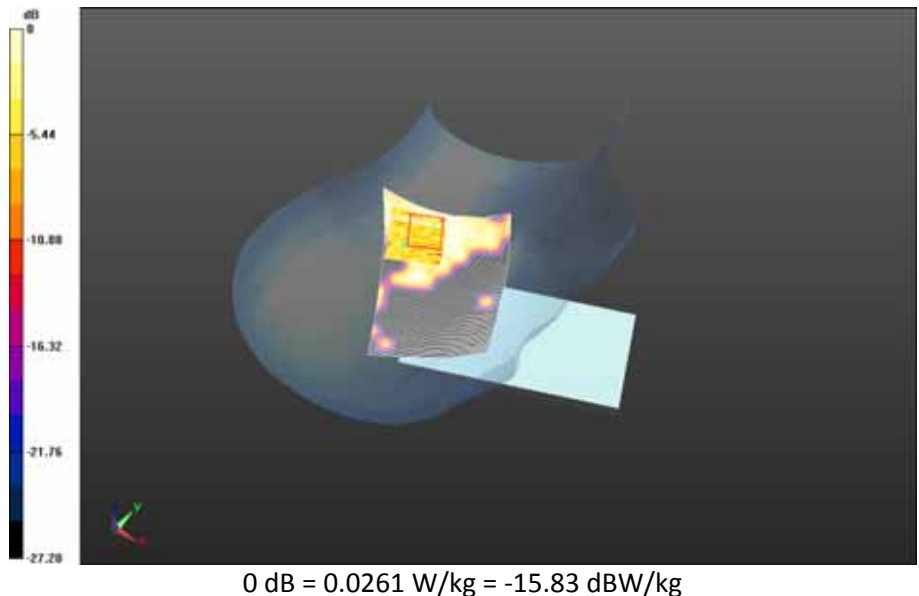

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		131(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/14/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5270 MHz; $\sigma = 4.811$ S/m; $\epsilon_r = 34.597$; $\rho = 1.000$ g/cm³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.63,4.63,4.63); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_23.5C_liq_temp_21.9C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0307 W/kg

Left-Hand-Side HSL - 802.11a_n 5200 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2A_chan54_amb_temp_23.5C_liq_temp_21.9C/Zoom Scan (51x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.292 V/m; Power Drift = 0.159 dB


Averaged SAR: SAR(1g) = 0.0145 W/kg; SAR(10g) = 0.00543 W/kg
Maximum value of SAR (interpolated) = 0.152 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

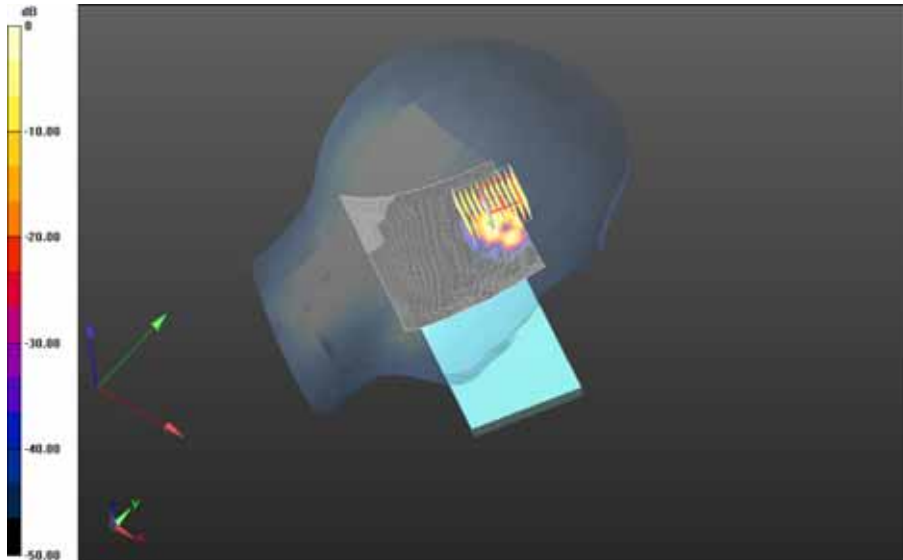

0 dB = 0.0243 W/kg = -16.14 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		133(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/15/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Left-Hand-Side HSL - 802.11a_n 5500 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5510 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5510 MHz; $\sigma = 5.095$ S/m; $\epsilon_r = 34.185$; $\rho = 1.000$ g/cm³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.2,4.2,4.2); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5500 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2C_chan102_amb_temp_24.1C_liq_temp_22.0C/Area Scan (121x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0207 W/kg

Left-Hand-Side HSL - 802.11a_n 5500 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-2C_chan102_amb_temp_24.1C_liq_temp_22.0C/Zoom Scan (41x51x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.244 V/m; Power Drift = -0.00836 dB


Averaged SAR: SAR(1g) = 0.00118 W/kg; SAR(10g) = 0.000120 W/kg
 Maximum value of SAR (interpolated) = 0.0362 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

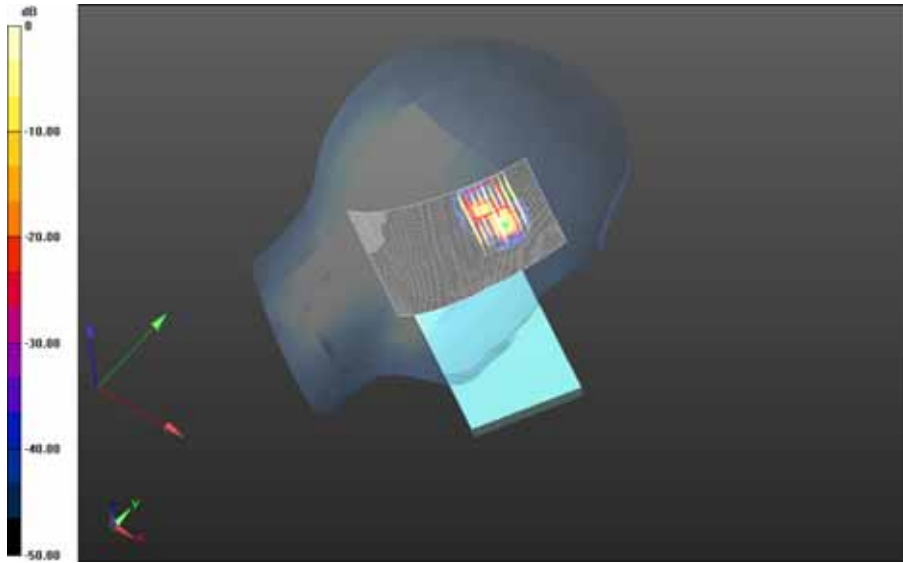

0 dB = 0.0170 W/kg = -17.70 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		135(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/15/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5755 MHz; $\sigma = 5.381$ S/m; $\epsilon_r = 33.753$; $\rho = 1.000$ g/cm³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.34,4.34,4.34); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_24.1C_liq_temp_21.8C/Area Scan (121x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0885 W/kg

Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_24.1C_liq_temp_21.8C/Zoom Scan (61x56x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.771 V/m; Power Drift = 0.323 dB


Averaged SAR: SAR(1g) = 0.0289 W/kg; SAR(10g) = 0.0110 W/kg
 Maximum value of SAR (interpolated) = 0.202 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

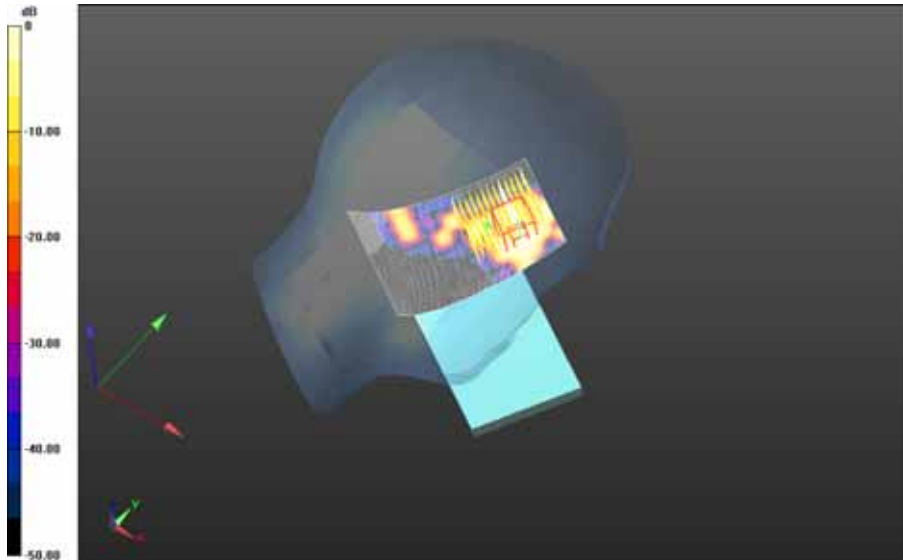


0 dB = 0.0521 W/kg = -12.83 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		137(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	


Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Tilt Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_22.2C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0821 W/kg

Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Closed/Tilt Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_22.2C/Zoom Scan (61x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.612 V/m; Power Drift = 0.505 dB

Averaged SAR: SAR(1g) = 0.0261 W/kg; SAR(10g) = 0.00920 W/kg
Maximum value of SAR (interpolated) = 0.243 W/kg

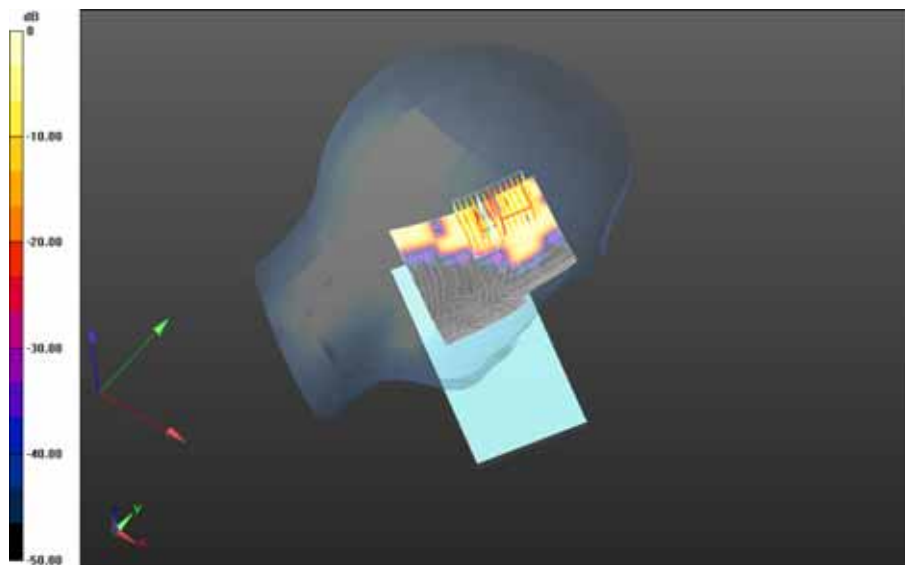

0 dB = 0.0603 W/kg = -12.20 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		138(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/15/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5755 MHz; $\sigma = 5.381$ S/m; $\epsilon_r = 33.753$; $\rho = 1.000$ g/cm³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.34,4.34,4.34); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_21.6C/Area Scan (111x81x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0785 W/kg

[1g avg. SAR maximum on border.](#)

[10g avg. SAR maximum on border.](#)


Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.6C_liq_temp_21.6C/Zoom Scan (46x46x61)/Cube 0: Interpolated


grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 1.716 V/m; Power Drift = 0.010 dB


Averaged SAR: SAR(1g) = 0.0282 W/kg; SAR(10g) = 0.0124 W/kg

Maximum value of SAR (interpolated) = 0.143 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 139(164)
Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

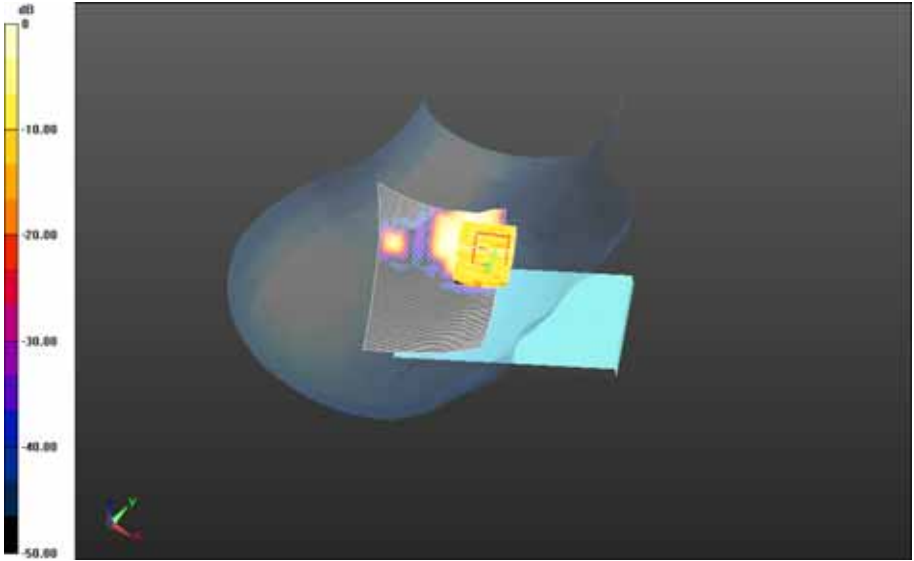


0 dB = 0.0493 W/kg = -13.07 dBW/kg


		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		140(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Tilt Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.5C_liq_temp_22.3C/Area Scan (101x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0371 W/kg
[10g avg. SAR maximum on border.](#)

Right-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Tilt Position - 802.11a-n_U-NII-3_chan151_amb_temp_23.5C_liq_temp_22.3C/Zoom Scan (46x51x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.491 V/m; Power Drift = 0.111 dB

Averaged SAR: SAR(1g) = 0.0142 W/kg; SAR(10g) = 0.00800 W/kg
Maximum value of SAR (interpolated) = 0.0785 W/kg

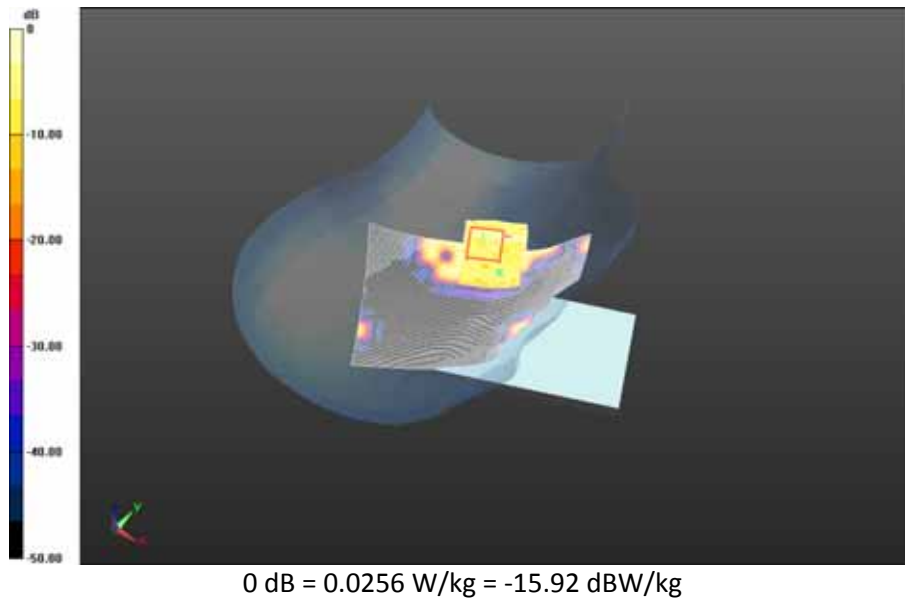

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		141(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/15/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5795 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5795 MHz; $\sigma = 5.433$ S/m; $\epsilon_r = 33.652$; $\rho = 1.000$ g/cm³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.34,4.34,4.34); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-3_chan159_amb_temp_24.0C_liq_temp_22.5C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0132 W/kg
 10g avg. SAR maximum on border.

Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Touch Position - 802.11a-n_U-NII-3_chan159_amb_temp_24.0C_liq_temp_22.5C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.483 V/m; Power Drift = -0.127 dB


Averaged SAR: SAR(1g) = 0.00266 W/kg; SAR(10g) = 0.00127 W/kg
 Maximum value of SAR (interpolated) = 0.0283 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

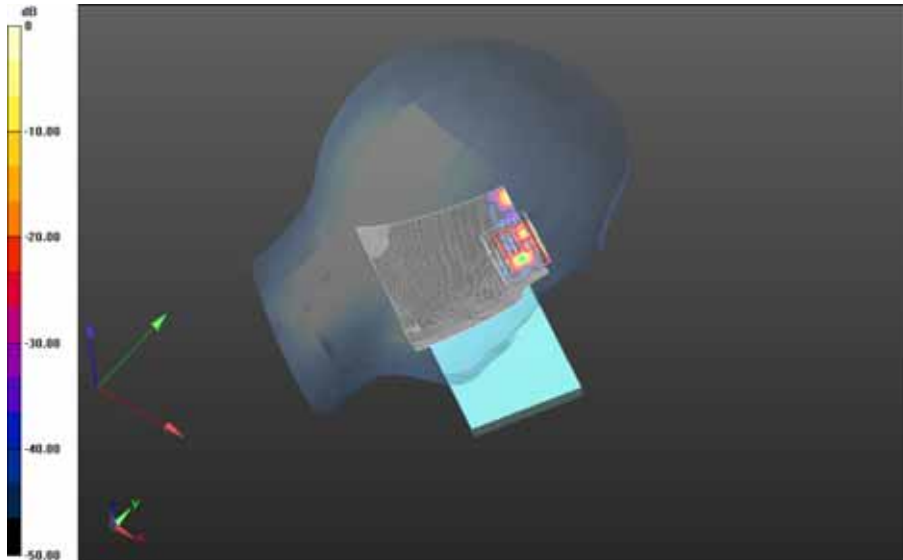


0 dB = 0.0210 W/kg = -16.78 dBW/kg


	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 143(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Tilt Position - 802.11a-n_U-NII-3_chan159_amb_temp_23.7C_liq_temp_22.6C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.00996 W/kg
[10g avg. SAR maximum on border.](#)

Left-Hand-Side HSL - 802.11a_n 5800 MHz - Slider Open/Tilt Position - 802.11a-n_U-NII-3_chan159_amb_temp_23.7C_liq_temp_22.6C/Zoom Scan (46x46x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.481 V/m; Power Drift = 0.257 dB

Averaged SAR: SAR(1g) = 0.0100 W/kg; SAR(10g) = 0.00582 W/kg
 Maximum value of SAR (interpolated) = 0.0430 W/kg

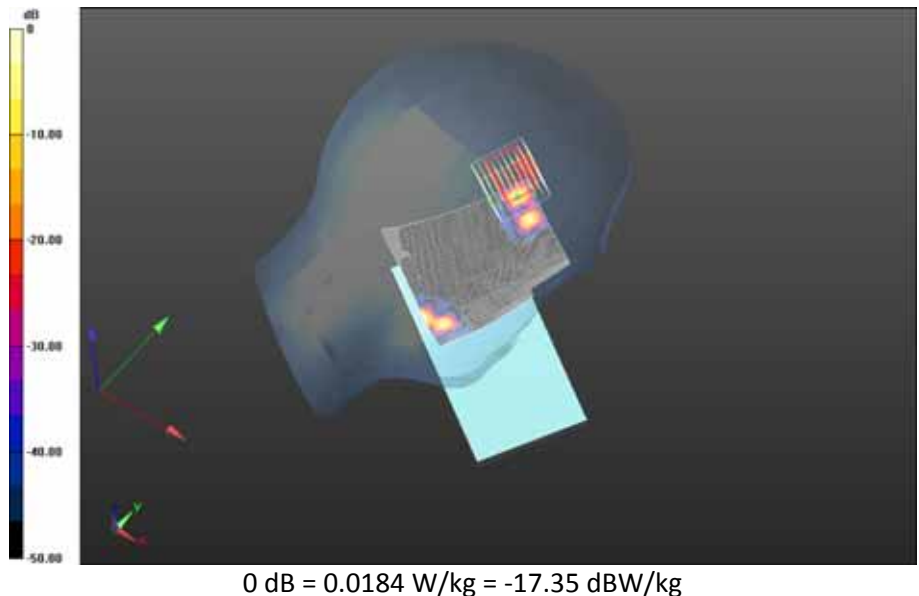

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		144(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161463503

Configuration: Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5190 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: $f=5190$ MHz; $\sigma = 5.552$ S/m; $\epsilon_r = 46.851$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.2C_Liquid_Temp_22.2C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0904 W/kg

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-1_chan38_Amb_Temp_24.2C_Liquid_Temp_22.2C/Zoom Scan (36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.069 V/m; Power Drift = 0.498 dB


Averaged SAR: SAR(1g) = 0.0474 W/kg; SAR(10g) = 0.0217 W/kg
Maximum value of SAR (interpolated) = 0.155 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

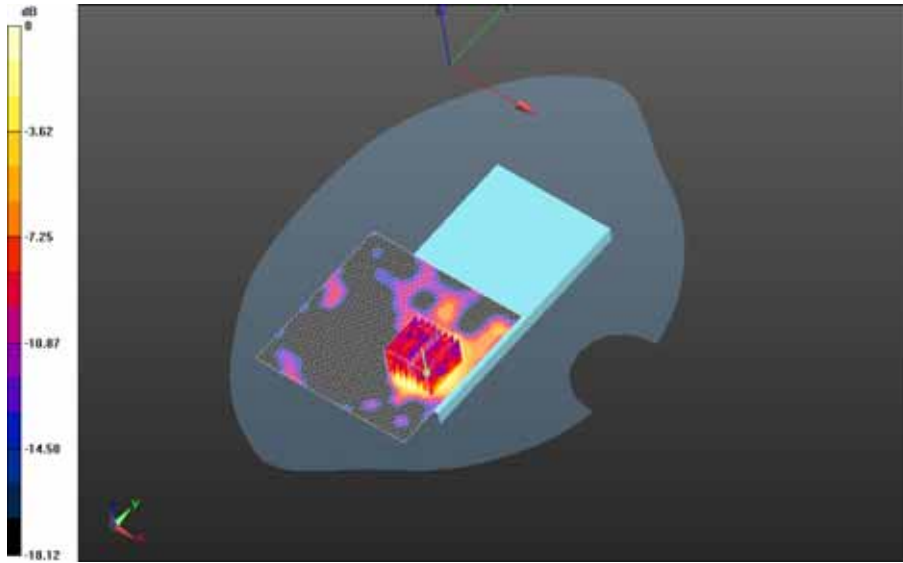

0 dB = 0.0819 W/kg = -10.87 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		146(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Closed

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5755 MHz; $\sigma = 6.216$ S/m; $\epsilon_r = 46.419$; $\rho = 1.000$ g/cm³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.81,3.81,3.81); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_23.8C_Liquid_Temp_22.1C/Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.119 W/kg

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Closed/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_23.8C_Liquid_Temp_22.1C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.962 V/m; Power Drift = 0.105 dB


Averaged SAR: SAR(1g) = 0.0662 W/kg; SAR(10g) = 0.0275 W/kg
 Maximum value of SAR (interpolated) = 0.248 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

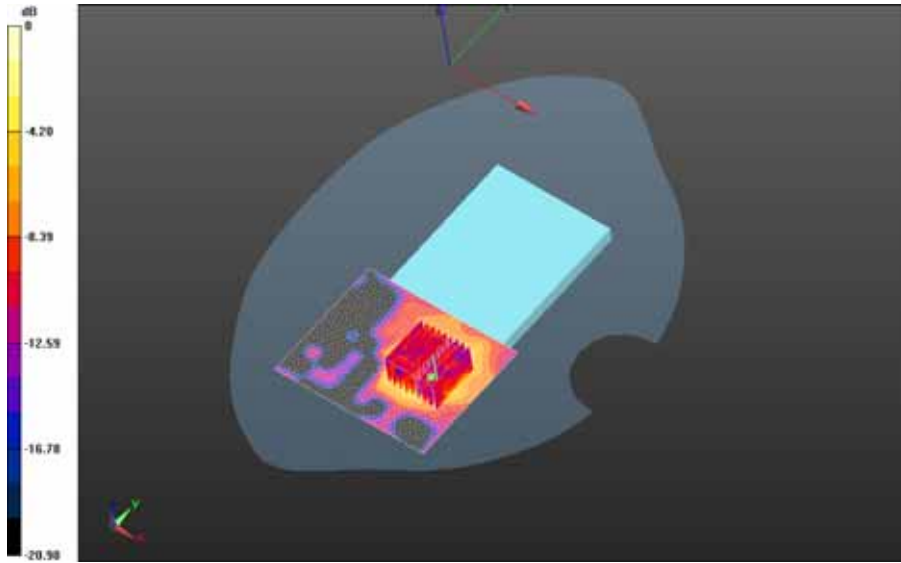

0 dB = 0.129 W/kg = -8.89 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		148(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5190 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5190 MHz; $\sigma = 5.552$ S/m; $\epsilon_r = 46.851$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-1_chan38_Amb_Temp_23.4C_Liquid_Temp_22.3C/Area Scan (91x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.124 W/kg

Mobile Hot Spot MSL - 802.11a_n 5200 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-1_chan38_Amb_Temp_23.4C_Liquid_Temp_22.3C/Zoom Scan (41x41x61)/Cube 0:
Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.210 V/m; Power Drift = 0.248 dB


Averaged SAR: SAR(1g) = 0.0665 W/kg; SAR(10g) = 0.0316 W/kg
Maximum value of SAR (interpolated) = 0.344 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

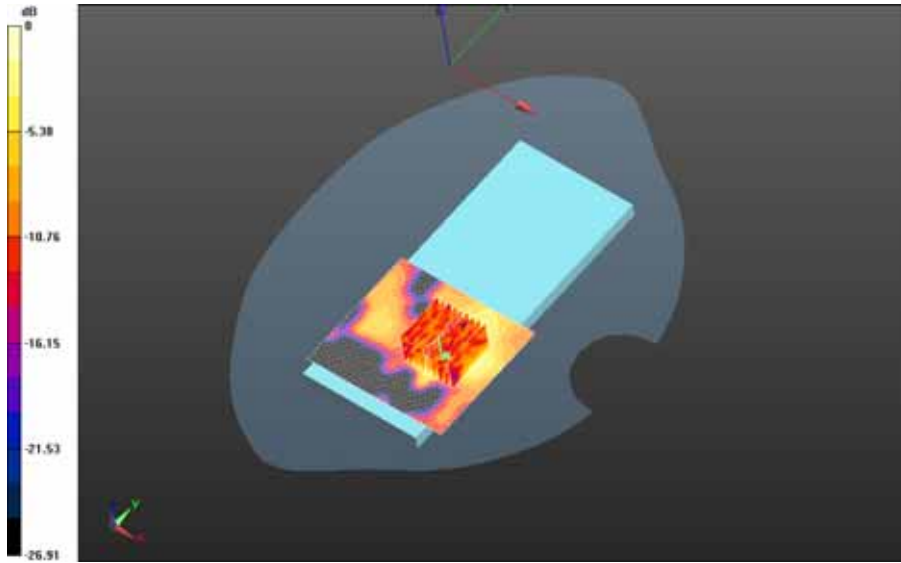

0 dB = 0.116 W/kg = -9.36 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3			Page 150(164)
	Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01	FCC ID: L6ARHT180LW

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5755 MHz; $\sigma = 6.216$ S/m; $\epsilon_r = 46.419$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.81,3.81,3.81); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_23.8C_Liquid_Temp_22.0C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.143 W/kg

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-3_chan151_Amb_Temp_23.8C_Liquid_Temp_22.0C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.816 V/m; Power Drift = 0.491 dB


Averaged SAR: SAR(1g) = 0.0652 W/kg; SAR(10g) = 0.0239 W/kg
Maximum value of SAR (interpolated) = 0.246 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

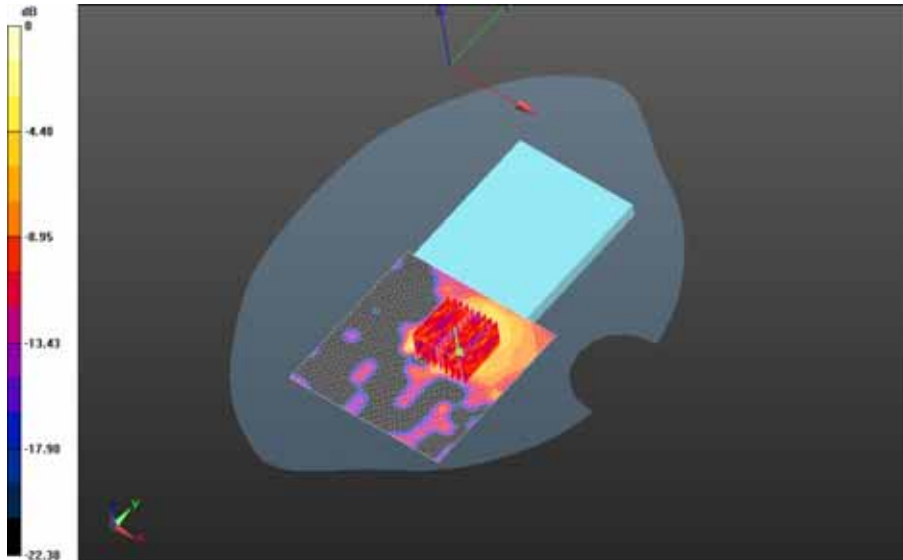


0 dB = 0.126 W/kg = -9.00 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 152(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-3_chan159_Amb_Temp_23.7C_Liquid_Temp_22.5C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.135 W/kg

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Back - 802.11a-n_U-NII-3_chan159_Amb_Temp_23.7C_Liquid_Temp_22.5C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.987 V/m; Power Drift = 0.288 dB

Averaged SAR: SAR(1g) = 0.0752 W/kg; SAR(10g) = 0.0293 W/kg
 Maximum value of SAR (interpolated) = 0.285 W/kg

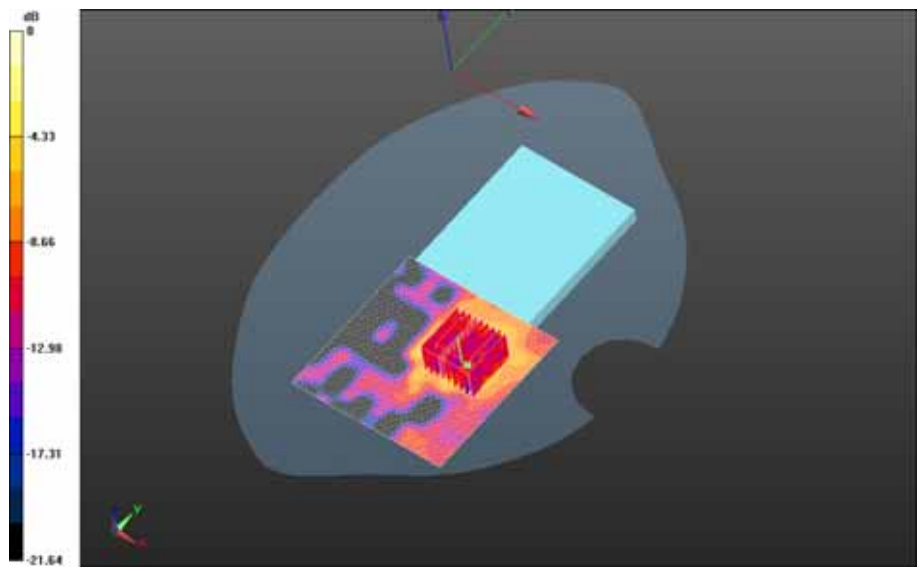


0 dB = 0.149 W/kg = -8.27 dBW/kg


		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 153(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Front - 802.11a-n_U-NII-3_chan159_Amb_Temp_23.7_Liquid_Temp_22.4C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0275 W/kg
[1g avg. SAR maximum on border.](#)

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Front - 802.11a-n_U-NII-3_chan159_Amb_Temp_23.7_Liquid_Temp_22.4C/Zoom Scan (41x41x61)/Cube 0:
 Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.810 V/m; Power Drift = -0.173 dB

Averaged SAR: SAR(1g) = 0.0138 W/kg; SAR(10g) = 0.00813 W/kg
 Maximum value of SAR (interpolated) = 0.0575 W/kg

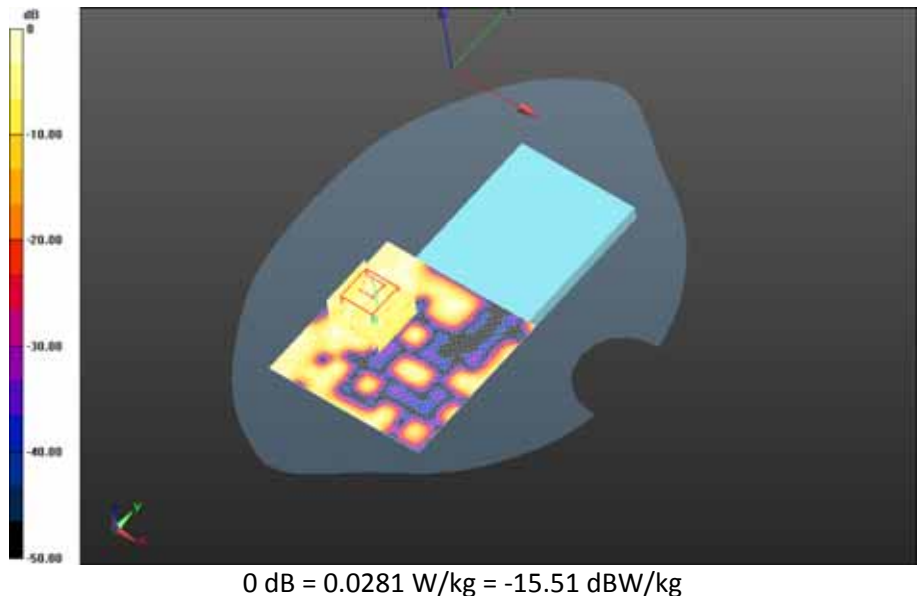



		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 154(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Right - 802.11a-n_U-NII-3_chan159_Amb_Temp_24.1C_Liquid_Temp_22.1C/Area Scan (31x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0511 W/kg
[1g avg. SAR maximum on border.](#)
[10g avg. SAR maximum on border.](#)

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Right - 802.11a-n_U-NII-3_chan159_Amb_Temp_24.1C_Liquid_Temp_22.1C/Zoom Scan (46x46x61)/Cube 0:
 Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.851 V/m; Power Drift = 0.038 dB

Averaged SAR: SAR(1g) = 0.0315 W/kg; SAR(10g) = 0.0180 W/kg
 Maximum value of SAR (interpolated) = 0.102 W/kg

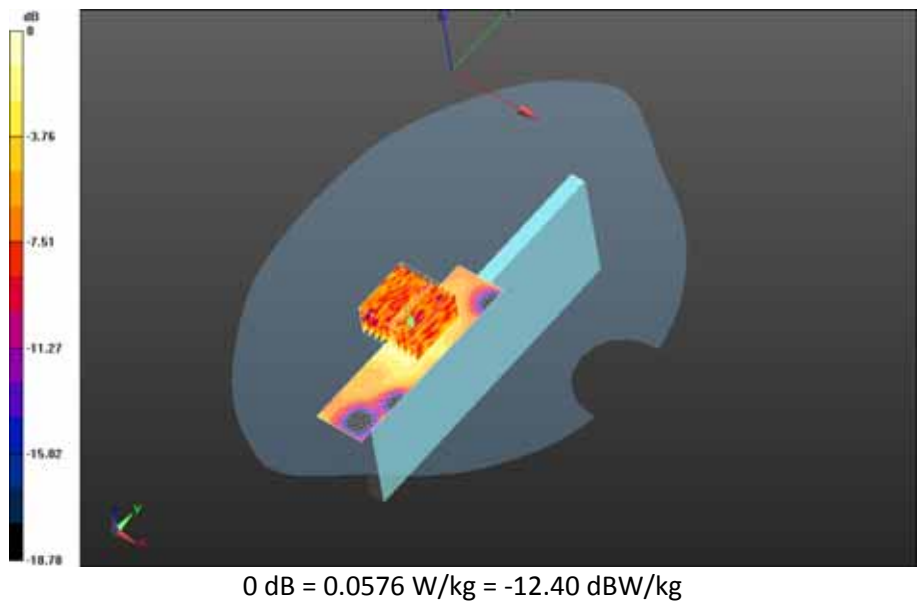



		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 155(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Top - 802.11a-n_U-NII-3_chan159_Amb_Temp_23.5C_Liquid_Temp_22.4C/Area Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0293 W/kg
[1g avg. SAR maximum on border.](#)
[10g avg. SAR maximum on border.](#)

Mobile Hot Spot MSL - 802.11a_n 5800 MHz - Slider Open/10mm Device Top - 802.11a-n_U-NII-3_chan159_Amb_Temp_23.5C_Liquid_Temp_22.4C/Zoom Scan (51x46x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.528 V/m; Power Drift = 0.434 dB

Averaged SAR: SAR(1g) = 0.0134 W/kg; SAR(10g) = 0.0102 W/kg
 Maximum value of SAR (interpolated) = 0.119 W/kg

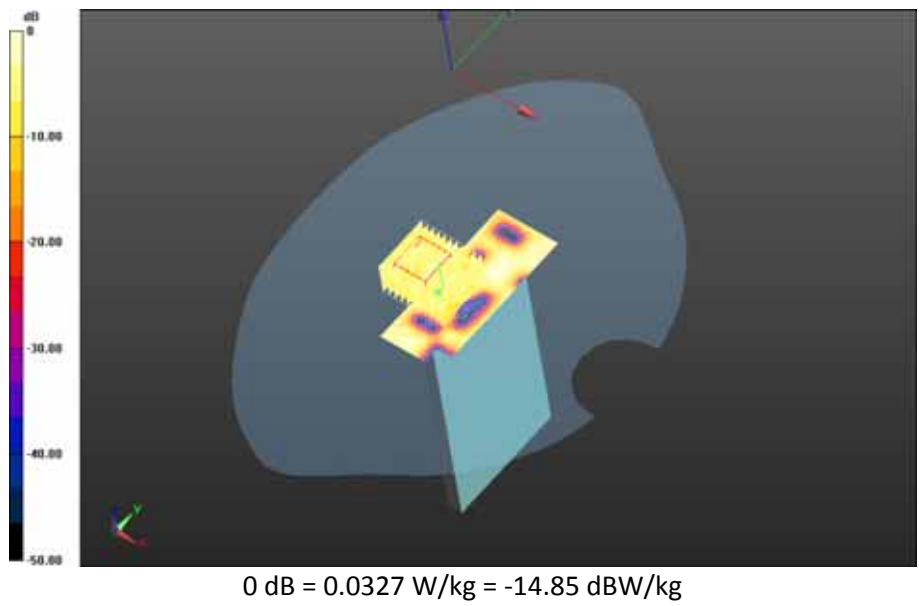

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		156(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Body Worn MSL - 802.11a_n 5200 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5270 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5270 MHz; $\sigma = 5.645$ S/m; $\epsilon_r = 46.642$; $\rho = 1.000$ g/cm³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan54_Amb_Temp_23.5C_Liquid_Temp_21.0C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.141 W/kg

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan54_Amb_Temp_23.5C_Liquid_Temp_21.0C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.754 V/m; Power Drift = 0.225 dB


Averaged SAR: SAR(1g) = 0.0874 W/kg; SAR(10g) = 0.0407 W/kg
 Maximum value of SAR (interpolated) = 0.359 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

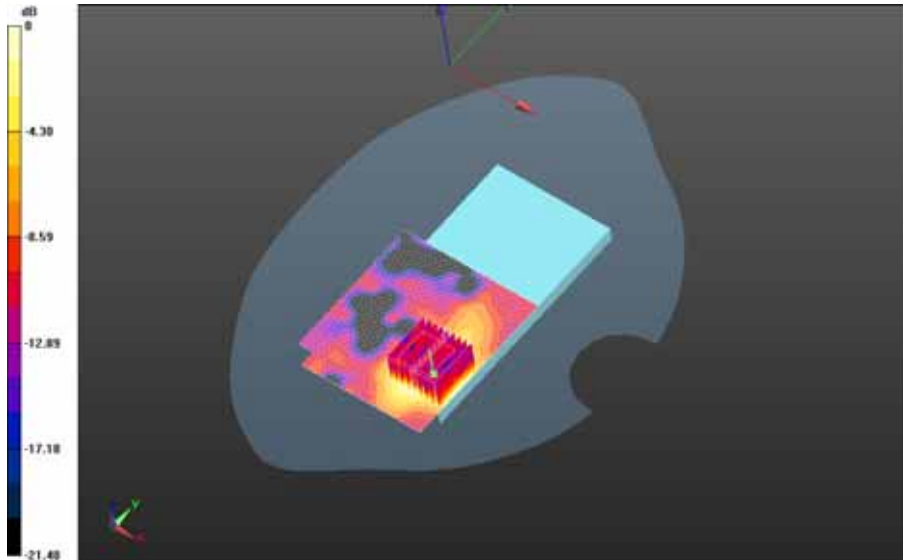


0 dB = 0.146 W/kg = -8.36 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		158(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	


Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.6C_Liquid_Temp_22.5C/Area Scan (101x101x1): Interpolated grid:
dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.112 W/kg

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.6C_Liquid_Temp_22.5C/Zoom Scan (41x41x61)/Cube 0:
Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.371 V/m; Power Drift = 0.448 dB

Averaged SAR: SAR(1g) = 0.0629 W/kg; SAR(10g) = 0.0312 W/kg
Maximum value of SAR (interpolated) = 0.196 W/kg

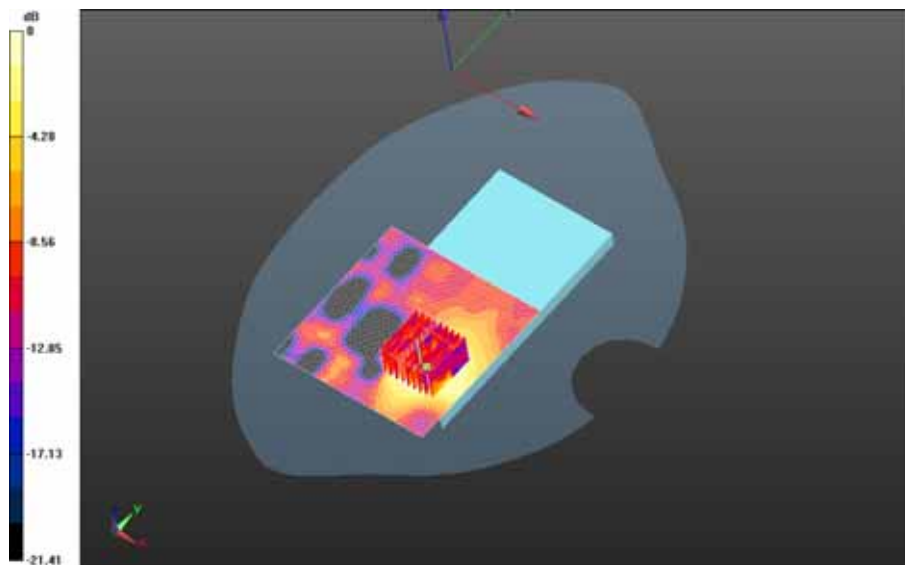


0 dB = 0.113 W/kg = -9.47 dBW/kg

		Document Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		Page 159(164)
		Author Data Andrew Becker	Dates of Test Oct 06 – Nov 02, 2015	Test Report No RTS-6066-1511-01


Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Front - 802.11a-n_U-NII-2A_chan52_Amb_Temp_23.9C_Liquid_Temp_21.8C/Area Scan (141x101x1): Interpolated grid:
dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0518 W/kg

Body Worn MSL - 802.11a_n 5200 MHz/15mm Device Front - 802.11a-n_U-NII-2A_chan52_Amb_Temp_23.9C_Liquid_Temp_21.8C/Zoom Scan (51x61x61)/Cube 0:
Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.893 V/m; Power Drift = 0.023 dB

Averaged SAR: SAR(1g) = 0.0105 W/kg; SAR(10g) = 0.00642 W/kg
Maximum value of SAR (interpolated) = 0.0902 W/kg

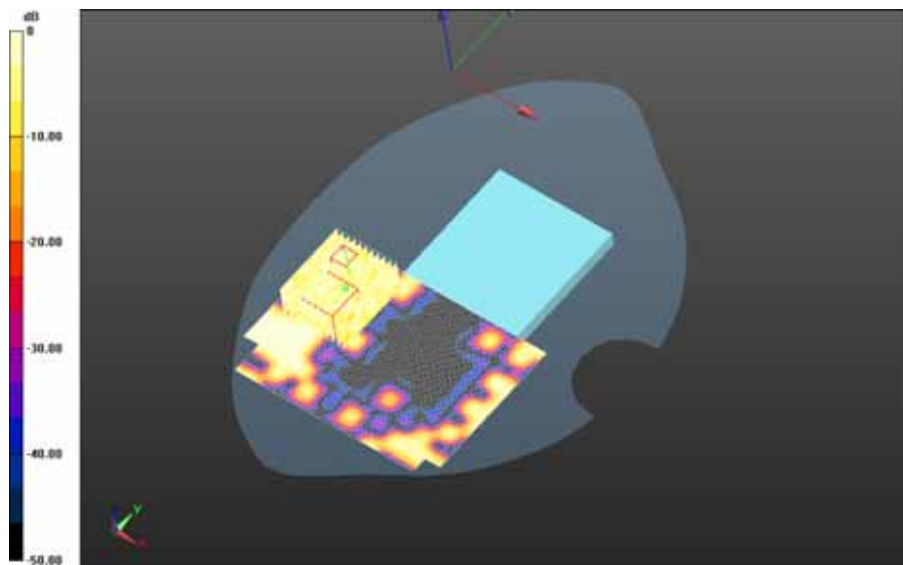


0 dB = 0.0210 W/kg = -16.78 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		160(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	


Body Worn MSL - 802.11a_n 5200 MHz/Holster Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.9C_Liquid_Temp_22.5C/Area Scan (101x101x1): Interpolated grid:
dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.134 W/kg

Body Worn MSL - 802.11a_n 5200 MHz/Holster Device Back - 802.11a-n_U-NII-2A_chan62_Amb_Temp_23.9C_Liquid_Temp_22.5C/Zoom Scan (46x41x61)/Cube 0:
Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.264 V/m; Power Drift = 0.088 dB

Averaged SAR: SAR(1g) = 0.0762 W/kg; SAR(10g) = 0.0346 W/kg
Maximum value of SAR (interpolated) = 0.244 W/kg

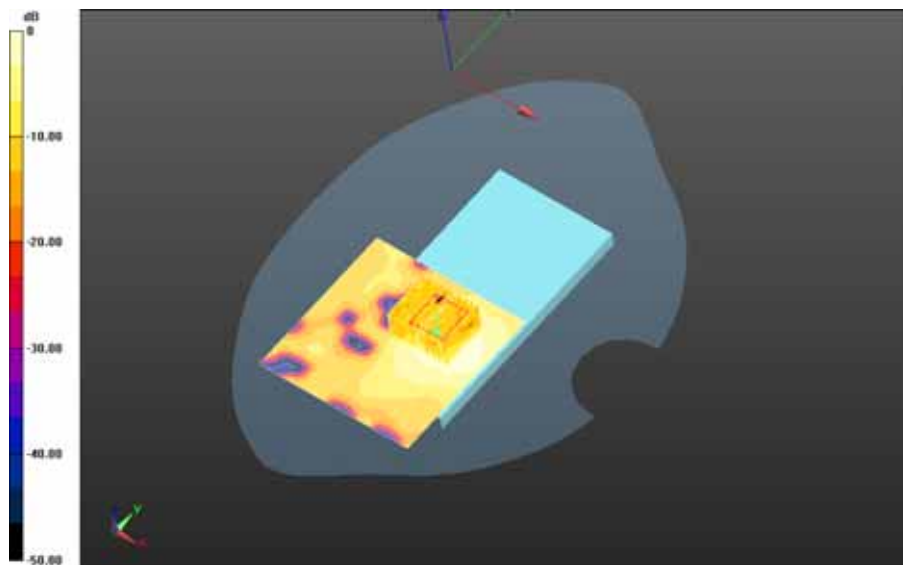

0 dB = 0.136 W/kg = -8.66 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		161(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Body Worn MSL - 802.11a_n 5500 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
Frequency: 5510 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: f=5510 MHz; $\sigma = 5.869$ S/m; $\epsilon_r = 46.669$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.78,3.78,3.78); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11a_n 5500 MHz/15mm Device Back - 802.11a-n_U-NII-2C_chan102_Amb_Temp_23.6C_Liquid_Temp_21.0C/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.134 W/kg

Body Worn MSL - 802.11a_n 5500 MHz/15mm Device Back - 802.11a-n_U-NII-2C_chan102_Amb_Temp_23.6C_Liquid_Temp_21.0C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.587 V/m; Power Drift = 0.239 dB


Averaged SAR: SAR(1g) = 0.0651 W/kg; SAR(10g) = 0.0212 W/kg
Maximum value of SAR (interpolated) = 0.238 W/kg

Author Data
Andrew Becker


Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

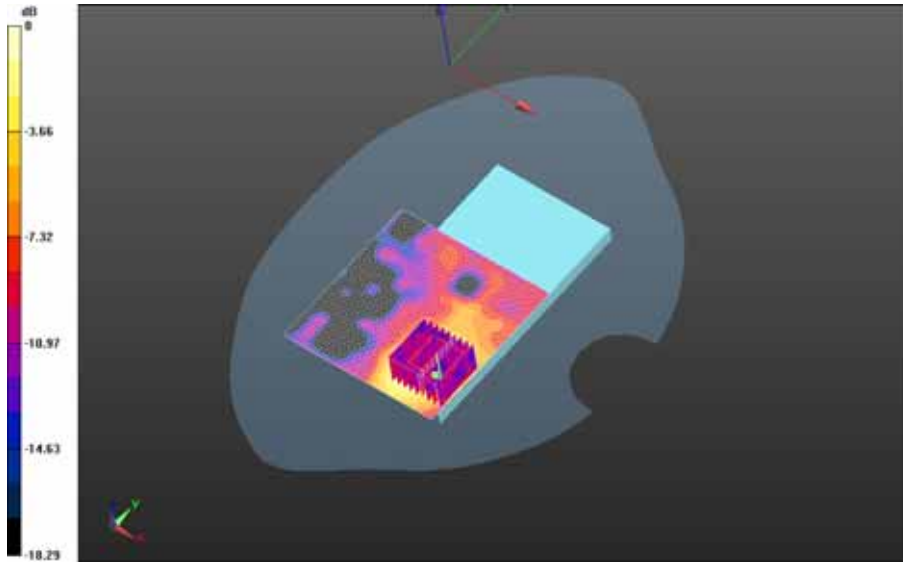

0 dB = 0.128 W/kg = -8.93 dBW/kg

		Document		Page
		Appendix B for the BlackBerry® Smartphone Model RHT181LW (STV100-2) SAR Report Part 3/3		163(164)
Author Data	Dates of Test	Test Report No	FCC ID:	
Andrew Becker	Oct 06 – Nov 02, 2015	RTS-6066-1511-01	L6ARHT180LW	

Date: 9/11/2015

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 1161462755

Configuration: Body Worn MSL - 802.11a_n 5800 MHz

Communication System: 802.11a/n (0); Communication System Band: UNII 1/2A/2C/3;
 Frequency: 5755 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
 Medium Parameters used: f=5755 MHz; $\sigma = 6.216$ S/m; $\epsilon_r = 46.419$; $\rho = 1.000$ g/cm³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.81,3.81,3.81); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/13/2015
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Worn MSL - 802.11a_n 5800 MHz/15mm Device Back - 802.11a_n_U-NII-3_chan151_Amb_Temp_23.7C_Liquid_Temp_21.1C/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0471 W/kg

Body Worn MSL - 802.11a_n 5800 MHz/15mm Device Back - 802.11a_n_U-NII-3_chan151_Amb_Temp_23.7C_Liquid_Temp_21.1C/Zoom Scan (66x51x61)/Cube 0:
 Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
 Reference Value = 1.994 V/m; Power Drift = -0.147 dB


Averaged SAR: SAR(1g) = 0.0279 W/kg; SAR(10g) = 0.0138 W/kg
 Maximum value of SAR (interpolated) = 0.0932 W/kg

Author Data
Andrew Becker

Dates of Test
Oct 06 – Nov 02, 2015

Test Report No
RTS-6066-1511-01

FCC ID:
L6ARHT180LW

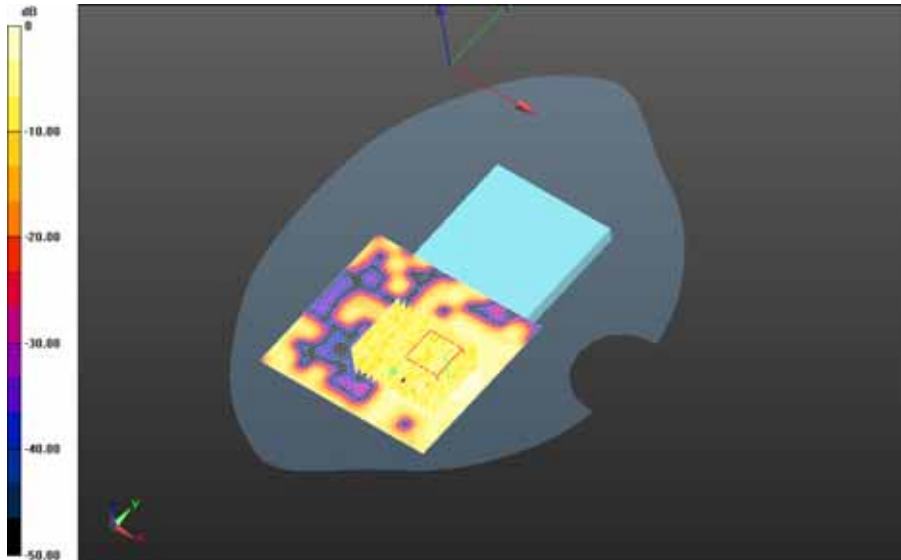

0 dB = 0.0455 W/kg = -13.42 dBW/kg