

FCC Test Report

for

Radio Control

Trade Name : AIRTRONICS
Model Number : 90406
FCC ID : L73-90406
Report Number : RF- C450-1003-506
Date of Receipt : July 30, 2010
Date of Report : Nov. 8, 2010

Prepared for

Sanwa Electronic Instrument CO., LTD.

1-2-50, Yoshida Honmachi, Higashi-Osaka, Osaka 578-0982. Japan

Prepared by



Central Research Technology Co.
EMC Test Laboratory

No.11, Lane41, Fushuen St., Jungshan Chiu, Taipei, Taiwan, 104, R.O.C.



NVLAP LAB CODE 200575-0

This report shall not be reproduced, except in full, without the written approval of Central Research Technology Co.. It may be duplicated completely in its entirety for legal use with the permission of the applicant. It should not be used to claim product endorsement by NVLAP, NIST or any U.S. government agency. The test result in the report applies only to the sample tested.

Verification of Compliance

Equipment under Test : Radio Control
Trade Name : AIRTRONICS
Model No. : 90406
FCC ID : L73-90406
Manufacturer : Dongguan Fountain Electronics
Applicant : Sanwa Electronic Instrument CO., LTD.
Address : 1-2-50, Yoshida Honmachi, Higashi-Osaka, Osaka 578-0982.
Japan
Applicable Standards : 47 CFR part 15, Subpart C
Date of Testing : Aug. 3 ~ 16, 2010
Deviation : N/A
Condition of Test Sample : Engineering Sample

We, **Central Research Technology Co.**, hereby certify that one sample of the designated product was tested in our facility during the period mentioned above. The test records, data evaluation and Equipment Under Test (EUT) configurations shown in the present report are true and accurate representation of the measurements of the sample's RF characteristics under the conditions herein specified.

The test results show that the EUT as described in the present report is in compliance with the requirements set forth in the standards mentioned above and apply to the tested sample identified in the present report only. The test report shall not be reproduced, except in its entirety, without the written approval of Central Research Technology Co.

PREPARED BY : Cathy Chen , DATE : Nov. 8, 2010
(Cathy Chen/ Technical Manager)

APPROVED BY : J. Y. Shih , DATE : Nov. 8, 2010
(Tsun-Yu Shih/General Manager)

Contents

1	General Description	5
1.1	General Description of EUT.....	5
1.2	Test Methodology.....	5
1.3	Applied standards	6
1.4	The Support Units :	9
1.5	Layout of Setup	9
1.6	Test Capability	10
1.7	Measurement Uncertainty	12
2	Maximum Peak Output Power	13
2.1	Applied standard.....	13
2.2	Test Instruments	13
2.3	Measurement Procedure	14
2.4	Test configuration.....	14
2.5	Test Data	15
3	Band Edge	17
3.1	Applied standard.....	17
3.2	Test Instruments	17
3.3	Measurement Procedure	18
3.4	Test configuration.....	18
3.5	Test Data	19
4	Hopping Channel Carrier Frequencies Spacing	27
4.1	Applied standard.....	27
4.2	Test Instruments	27
4.3	Measurement Procedure	28
4.4	Test configuration.....	28
4.5	Test Data	29
5	Number of Hopping Channels.....	33
5.1	Applied standard.....	33
5.2	Test Instruments	33
5.3	Measurement Procedure	33
5.4	Test configuration.....	33
5.5	Test Data	34
6	Radiated Emission	37

6.1	Applied standard	37
6.2	Test Instruments	38
6.3	Measurement Procedure	39
6.4	Test configuration	40
6.5	Test Data	41
7	Dwell Time	53
7.1	Applied standard	53
7.2	Test Instruments	53
7.3	Measurement Procedure	54
7.4	Test configuration	54
7.5	Test Data	55
8	Antenna Requirement	57
8.1	Applied standard	57
8.2	Antenna Information	57
8.3	Result	57

Attachment 1 – Photographs of the Test Configurations

Attachment 2 –External Photographs of EUT

Attachment 3 –Internal Photographs of EUT

1 General Description

1.1 General Description of EUT

Equipment under Test : Radio Control
Model No. : 90406
Power in : 9Vdc by batteries
Test Voltage : 9Vdc by batteries
Manufacturer : Dongguan Fountain Electronics
Channel Numbers : 51
Frequency Range : 2415~2465MHz
Chaneeel Bandwidth : 1MHz
Modulation : FHSS
Antenna Spec : Monopole type 1.1dBi
Function Description :

The EUT is used to transmit control command. Please refer to the user's manual for the details.

Perform the function of EUT continuously by executing the test program supplied by manufacturer.

1.2 Test Methodology

For this EUT, both conducted and radiated emissions were performed according to the procrdures illustrated in ANSI C63.4:2003 and other required measurements were illustrated in separate sections of this test report for detail.

Since the EUT is considered a potable unit, it was pre-tested on the positioned for each of 3 axis. Therefor only the test data of the worse case- X axiz was used for Radiated test.

1.3 Applied standards

(1) Conduction Emission Requirement

For intentional device, according to §15.207(a) line conduction emission limit is as below table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

(2) Radiated Emission Requirement

For intentional device, according to §15.209, the general requirement of field strength of radiated emissions from intentional radiator at a distance of 3 meters shall not exceed the below table.

Frequency (MHz)	Measurement Distance (m)	Field Strength (uV/m)	Field Strength (dBuV/m)
30 – 88	3	100	40.0
88 – 216	3	150	43.5
216 – 960	3	200	46.0
960 – 1610	3	500	54.0
above 1610	3	500	54.0

Note 1- The lower limit shall apply at the transition frequency.

(3) Hopping Channel Carrier Frequencies Separation and 20dB Bandwidth

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

(4) Dwell Time on Each Channel

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(5) Maximun Peak Output Power

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(6) 100kHz Bandedge

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

(7) Restricted Band

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
² 1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

1.4 The Support Units :

No.	Unit	Model No./ Serial No.	Trade Name	Power Code	Supported by lab.
N/A	*	*	*	*	*

1.5 Layout of Setup



Connecting Cables :

No.	Cable	Length	Shielded	Core	Shielded Backshell	Supported by lab.	Note
N/A	*	*	*	*	*	*	*

1.6 Test Capability

Test Facility

The test facility used for evaluating the conformance of the EUT with each standard in the present report meets what required in CISPR16-1-4, CISPR16-2-3 and ANSI C63.4:2003.

Test Room	Type of Test Room	Descriptions
TR1	10m semi-anechoic chamber (23m×14m×9m)	Complying with the NSA requirements in documents CISPR 22 and ANSI C63.4:2003. For the radiated emission measurement.
TR11	3m semi-anechoic chamber (9m × 6m × 6m)	
TR13	Test Site	For the RF conducted emission measurement.
TR5	Shielding Room (8m×5m×4m)	For the conducted emission measurement.

Test Laboratory Competence Information

Central Research Technology Co. has been accredited / filed / authorized by the agencies listed in the following table.

Certificate	Nation	Agency	Code	Mark
Accreditation Certificate	USA	NVLAP	200575-0	ISO/IEC 17025
	R.O.C. (Taiwan)	TAF	0905	ISO/IEC 17025
	R.O.C. (Taiwan)	BSMI	SL2-IN-E-0033, SL2-IS-E-0033, SL2-R1/R2-E-0033, SL2-A1-E-0033 SL2-L1-E-0033	ISO/IEC 17025
Site Filing Document	USA	FCC	474046, TW1053	Test facility list & NSA Data
	Canada	IC	4699A-1,-3	Test facility list & NSA Data
	Japan	VCCI	R-1527,C-1609,T-131,T-1441, G-10	Test facility list & NSA Data
Authorization Certificate	Germany	TUV	10021687-2010	ISO/IEC 17025
	Norway	Nemko	ELA212	ISO/IEC 17025

The copy of each certificate can be downloaded from our web site: www.crc-lab.com

1.7 Measurement Uncertainty

The assessed measurement uncertainty with a suitable coverage factor K to ensure 95% confidence level for the normal distribution are shown as below, the values are less than U_{cispr} in table 1 of CISPR 16-4-2.

Test Item	Measurement Uncertainty	
Peak Output Power	1.1dB	
Radiated Emission: (30MHz~200MHz)	Horizontal 2.8dB ; Vertical 3.5 dB	
Radiated Emission: (200MHz~1GHz)	Horizontal 3.4dB ; Vertical 2.8dB	
Radiated Emission: (1GHz~18GHz)	Horizontal 2.5dB ; Vertical 2.4dB	
Radiated Emission: (18GHz~26.5GHz)	Horizontal 4.0dB ; Vertical 3.9dB	
Line Conducted Emission	ESH2-Z5	3.1dB
	ENV 4200	3.8dB

2 Maximum Peak Output Power

Result: Pass

2.1 Applied standard

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

2.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Spectrum Analyzer	Agilent	E4405B/ MY45106706	2010/3/24	2011/3/24
RF cable	Suhner	Sucoflex 102/ 19625/2	2010/8/18	2011/8/18
Chamber	NA	TR13	NCR	NCR

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
3MHz	3MHz	Peak	Maxhold	

Climatic Condition


Ambient Temperature : 24°C

Relative Humidity : 54%

2.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data at low, middle and high channel frequencies individually.
- c. According to FCC Public Notice DA00-705, Span = approximately 5 times the 20 dB bandwidth
 $RBW > \text{the } 20 \text{ dB bandwidth}$, $VBW \geq RBW$ to measure the peak output power and compare with the required limit.

2.4 Test configuration

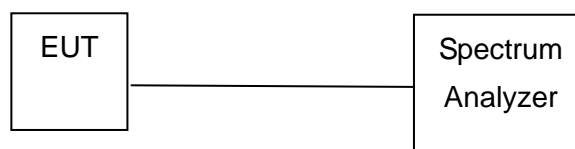

2.5 Test Data


Test Mode : Continuous Transmitting Tester : Jun Kong

Operating Frequency (MHz)	Reading Data (dBm)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
2415	15.69	1.4	17.09	20.97	3.88
2442	15.12	1.4	16.52	20.97	4.45
2465	14.38	1.4	15.78	20.97	5.19


Note:

1. Correction Factor (dB) = Cable Loss + Antenna gain
2. Emission (dBm) = Reading Data + Correction Factor
3. Margin (dB) = Limit – Emission


Low Channel (2415MHz)

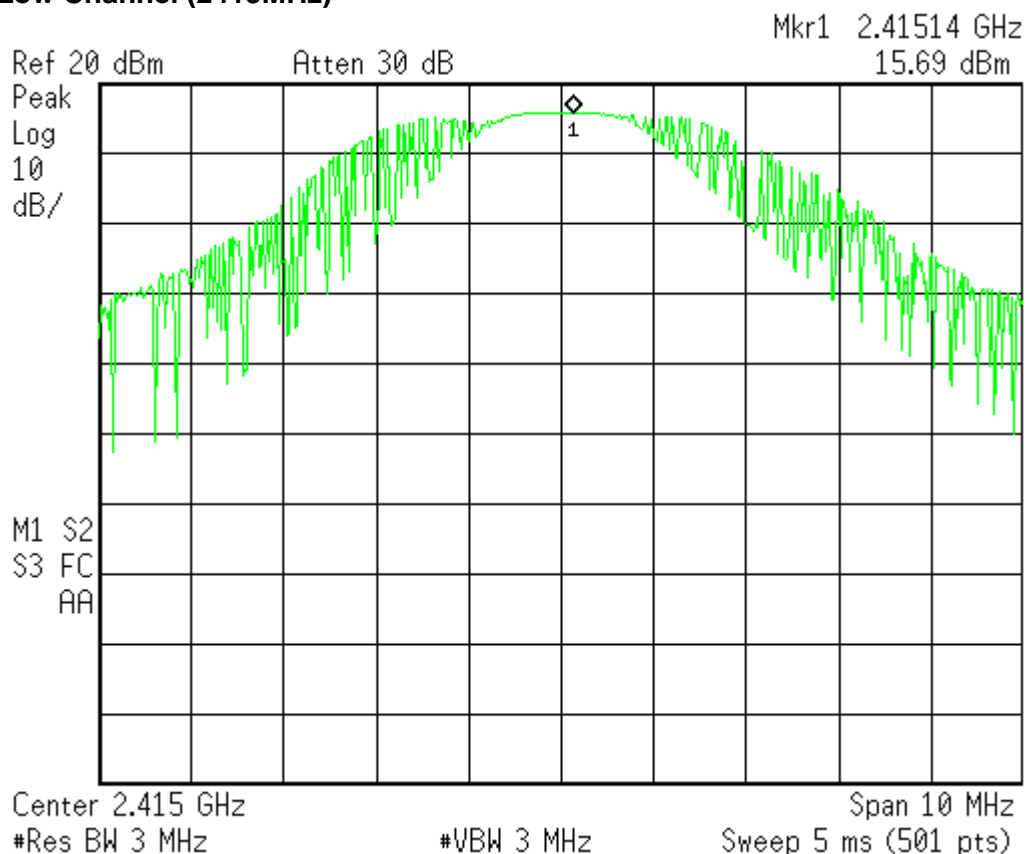

MiddleChannel (2442MHz)

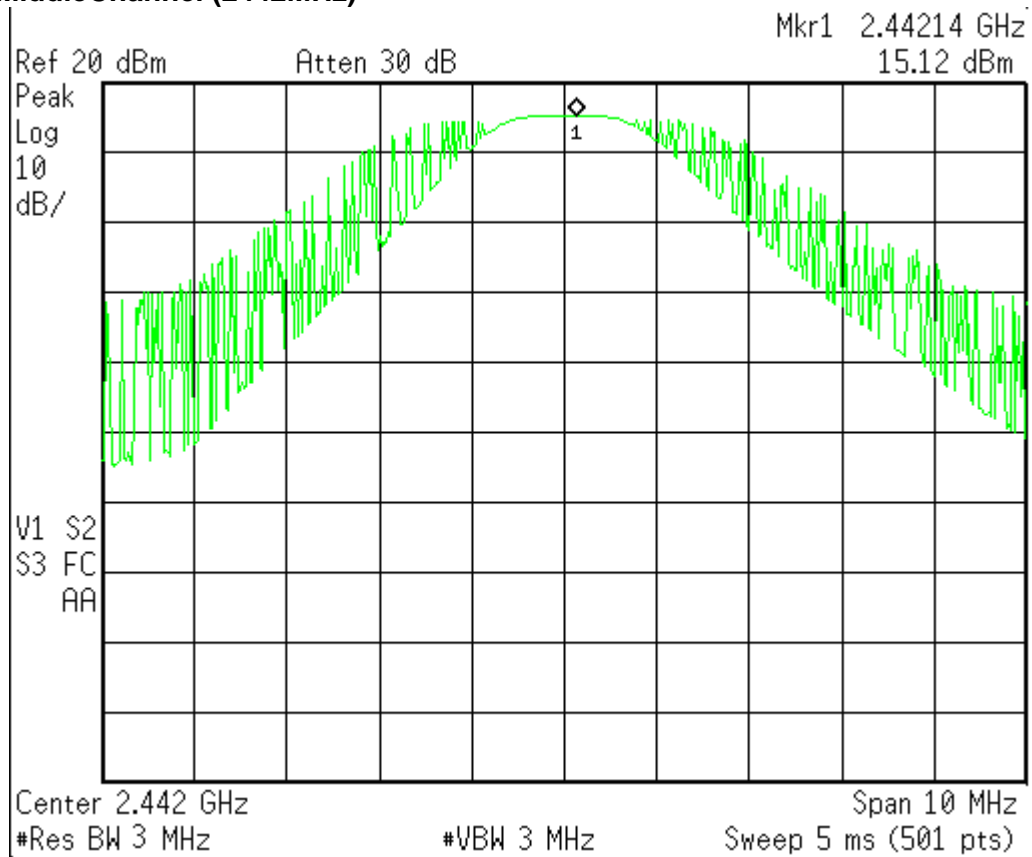

High Channel (2465MHz)

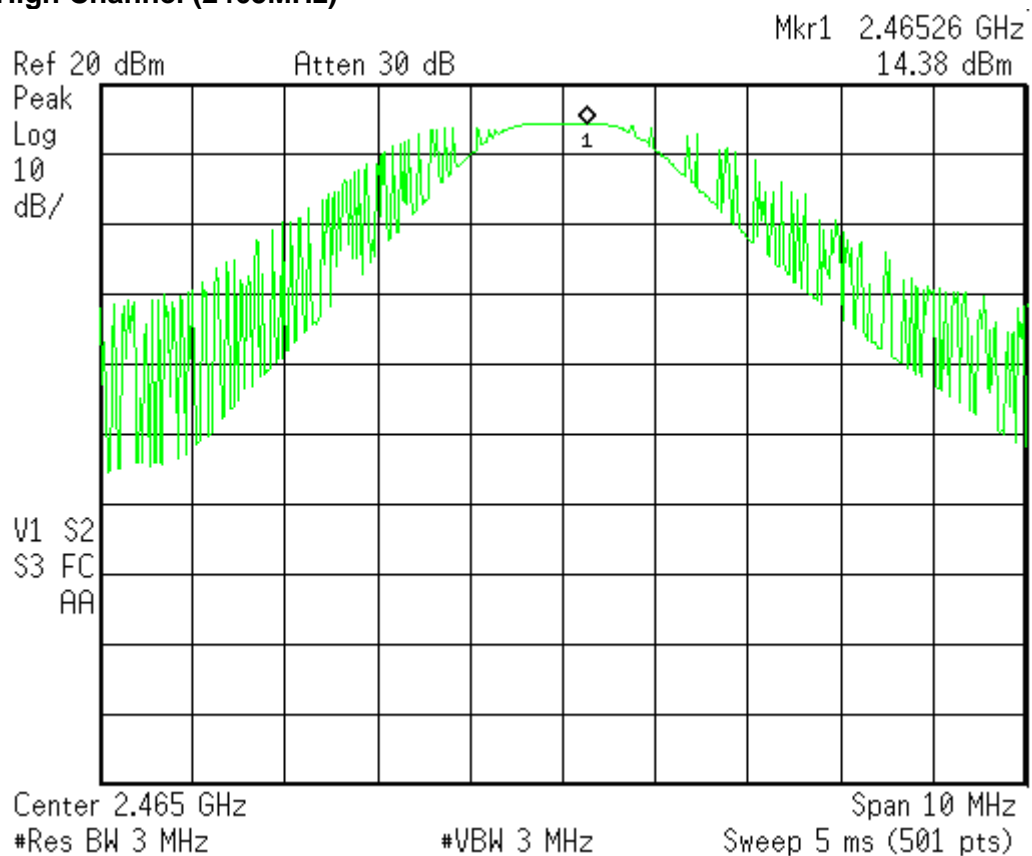

3 Band Edge

Result: Pass

3.1 Applied standard

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

3.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Spectrum Analyzer	Agilent	E4407B/ MY45106795	2010/3/24	2011/3/24
Antenna	EMCO	3117/57416	2010/3/4	2011/3/4
PRE-AMPLIFIER	MITEQ	AFS6-02001800-35- 10P-6/949196	2009/9/10	2010/09/10
PRE-AMPLIFIER	MITEQ	JS4-00101800-28-5 A/742309	2009/12/21	2010/12/21
RF cable	Suhner	Sucoflex 100/C0029	2010/3/19	2011/3/18
RF cable	JMCA	MWX241/B/C0103	2010/4/20	2011/4/19
Semi - anechoic Chamber	ETS. LINDGREN	TR11/ 906-A	2010/4/19	2011/4/19

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.
3. The calibration date of the semi-anechoic chamber listed above is the date of NSA measurement.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
100kHz	100kHz	Peak	Maxhold	100kHz Bandedge
1MHz	3MHz	Peak	Maxhold	Bandedge Peak
1MHz	10Hz	Peak	Maxhold	Bandedge Average

Climatic Condition


Ambient Temperature : 24°C

Relative Humidity : 54%

3.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user’s manual.
- b. A software provided by client enabled the EUT to transmit data at at lowest and highest channel frequencies individually.
- c. According FCC Public Notice DA00-705, Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, $RBW \geq 1\%$ of the span , $VBW \geq RBW$, to measure the band edge and compare with the required limit.

3.4 Test configuration

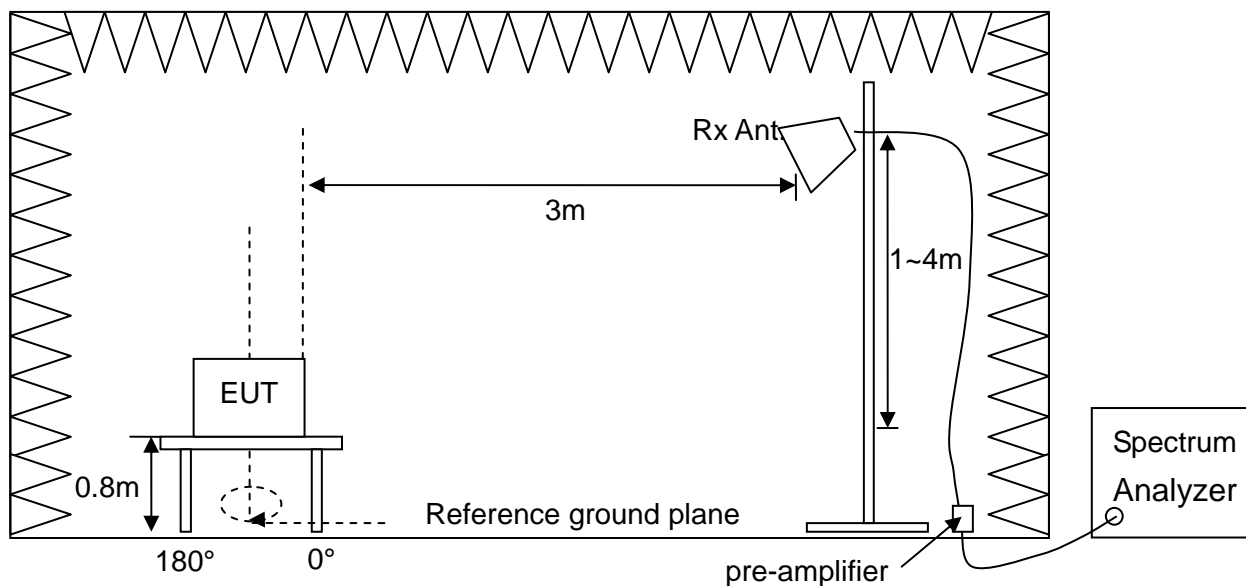

3.5 Test Data

100kHz Bandedge Measurement

Test Mode : Continuous Transmitting

Tester : Jun Kong

Operating Frequency (MHz)	Antenna Polarization	Frequency (MHz)	Main Frequency Emission Data (dBuV/m)	Bandedge Emission Data (dBuV/m)	Atenuation (dB)	Limit (dB)	Margin (dB)
2415	V	2398.6	85.00	41.67	43.33	20	23.33
2415	H	2398.6	85.86	30.15	55.71	20	35.71
2465	V	2489.8	87.45	31.93	55.52	20	35.52
2465	H	2483.5	87.60	31.65	55.95	20	35.95

Note:

1. Atenuation (dB) = Main Frequency Emission Data –Bandedge Emission Data
2. Margin(dB) = Atenuation – Limit


Low Channel (2415MHz) - Vertical




Low Channel (2415MHz) - Horizontal



High Channel (2465MHz) - Vertical

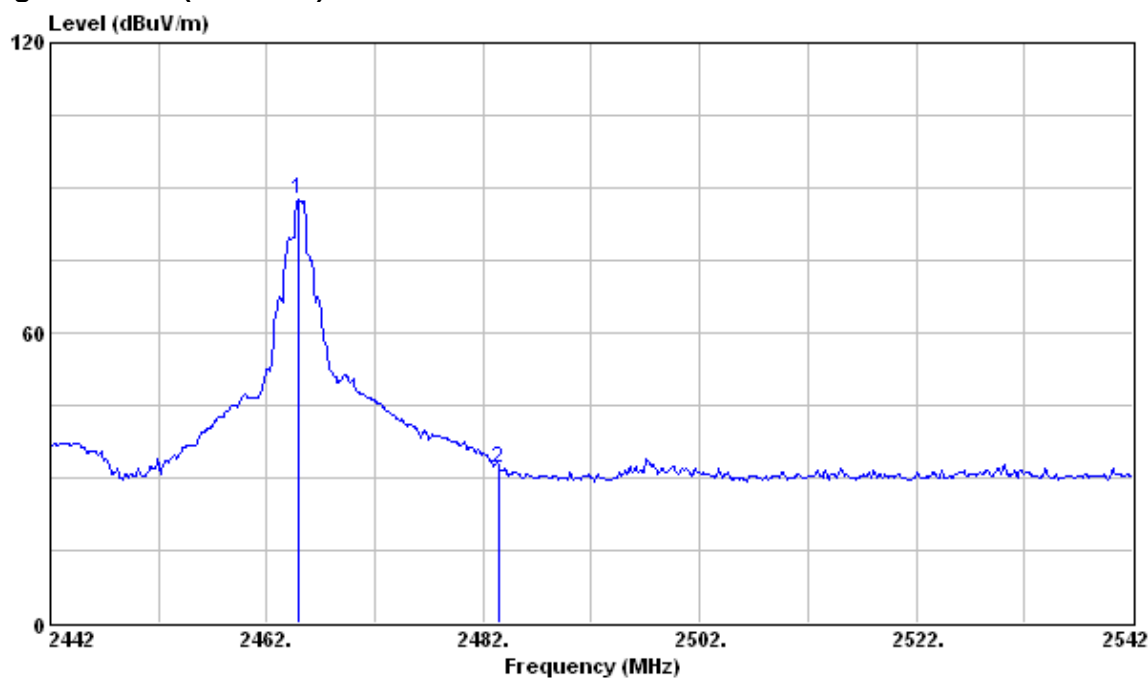

High Channel (2465MHz) - Horizontal

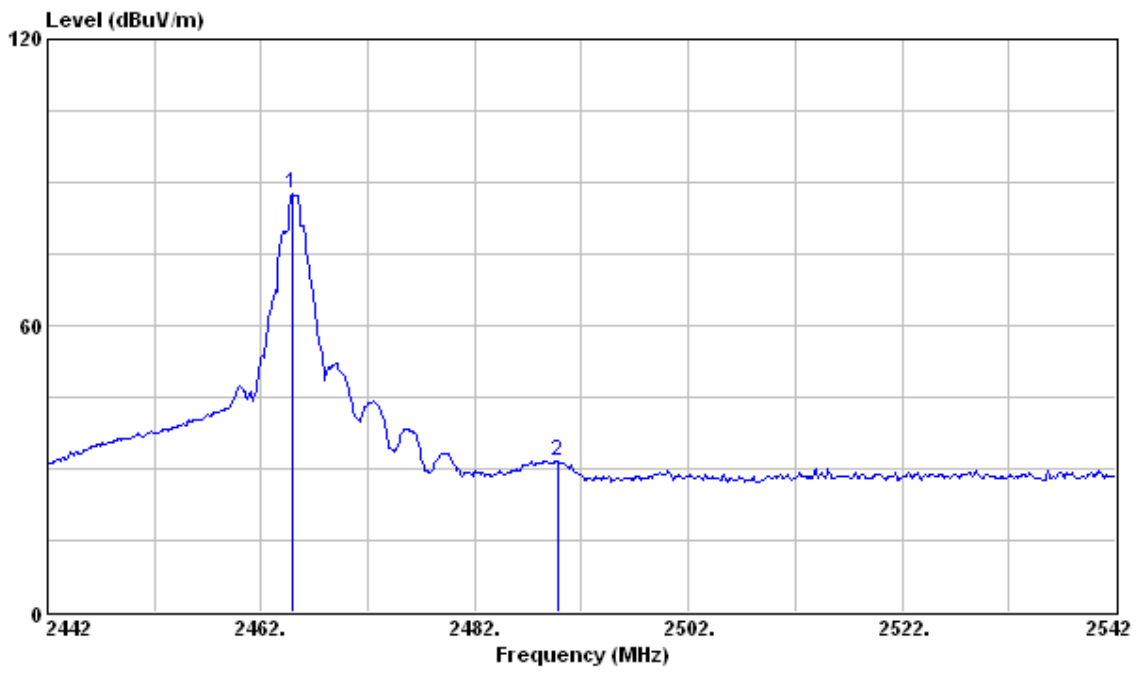

Radiated Measurement

Test Mode : Continuous Transmitting


Tester : Jun Kong

Operating Frequency (MHz)	Antenna Polarization	Frequency (MHz)	Reading Data (dBuV)		Correction Factor (dB/m)	Emission (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
			PK.	AV.		PK.	AV.	PK.	AV.	PK.	AV.
2415	V	2390.00	90.09	65.97	-36.07	54.02	29.90	74	54	19.98	24.10
2415	H	2374.50	86.77	65.98	-36.13	50.64	29.85	74	54	23.36	24.15
2465	V	2486.50	95.37	68.59	-36.04	59.33	32.55	74	54	14.67	21.45
2465	H	2485.50	90.02	66.62	-36.03	53.99	30.59	74	54	20.01	23.41


Note:

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier
2. Emission (dBuV/m) = Reading Data + Correction Factor
3. Margin(dB) = Limit – Emission


Low Channel (2415MHz), V Polarization – PK.

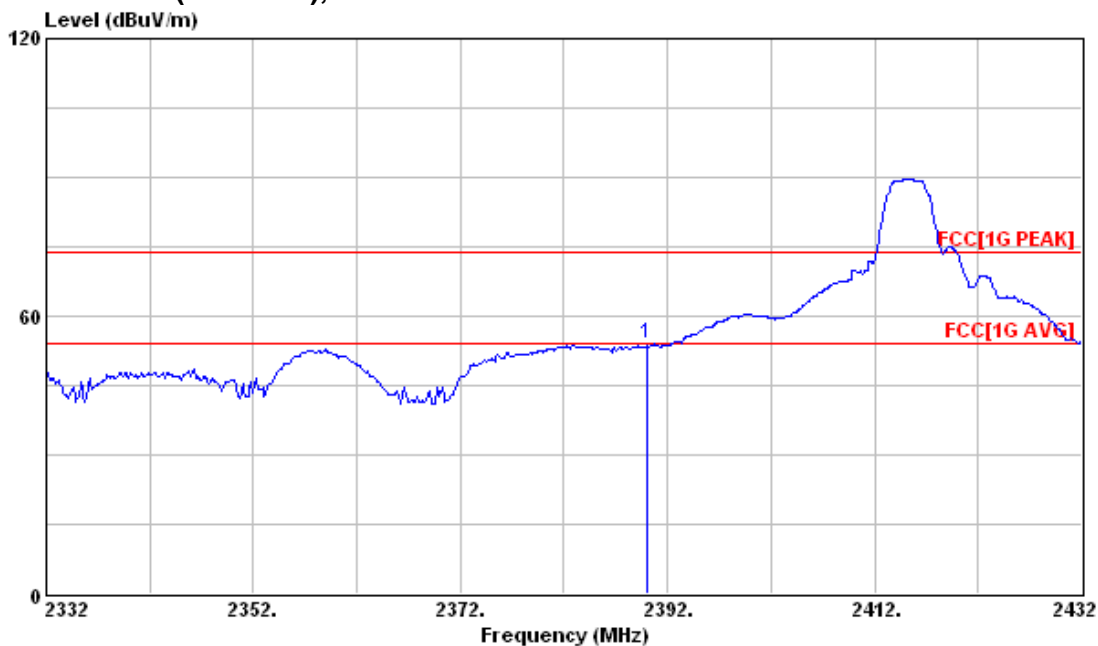


Low Channel (2415MHz), V Polarization – AV.

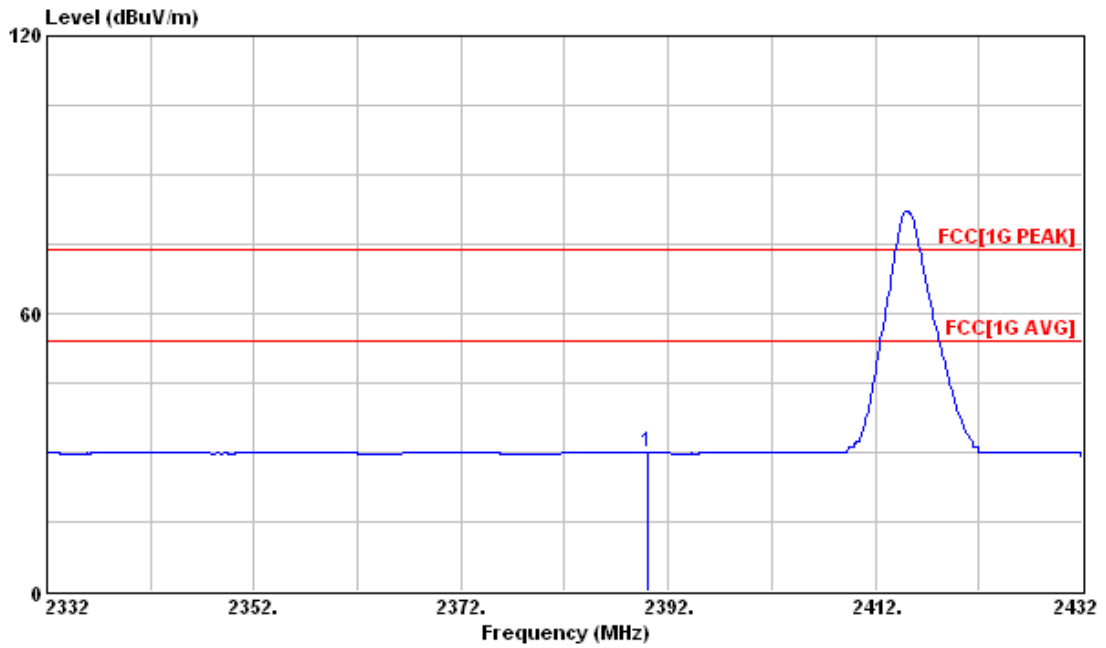


Low Channel (2415MHz), H Polarization – PK.

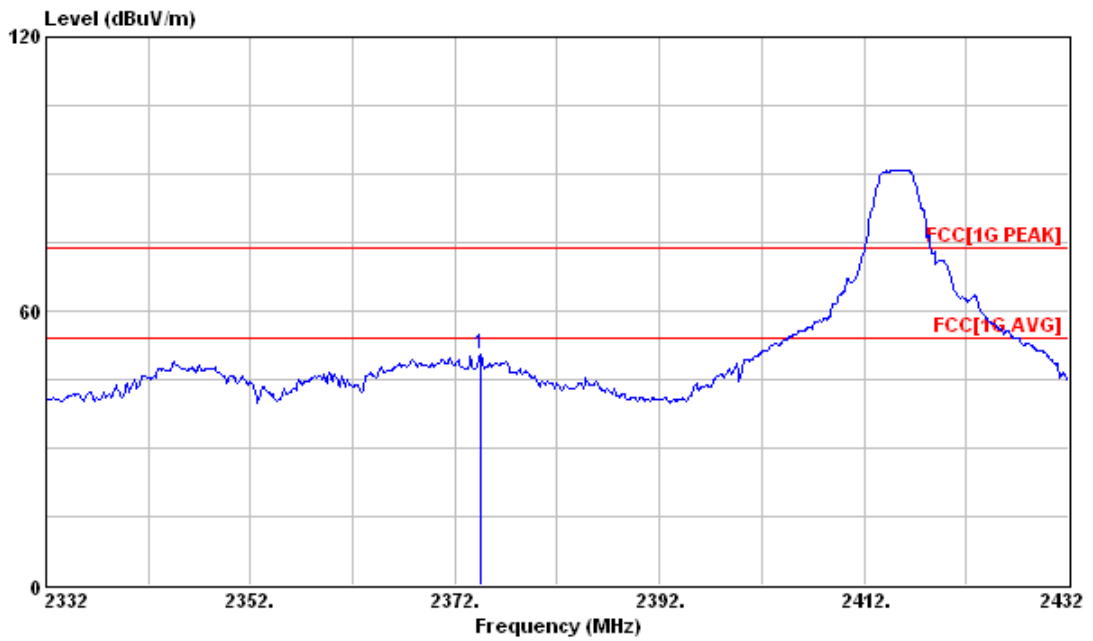


Low Channel (2415MHz), H Polarization – AV.

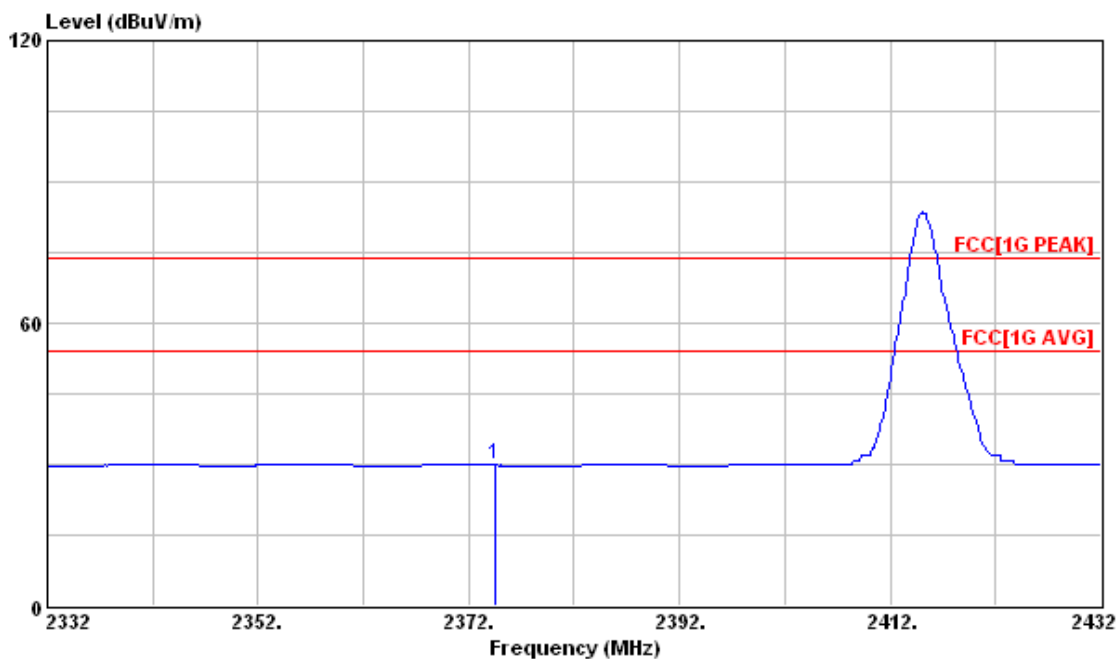


High Channel (2465MHz), V Polarization – PK.

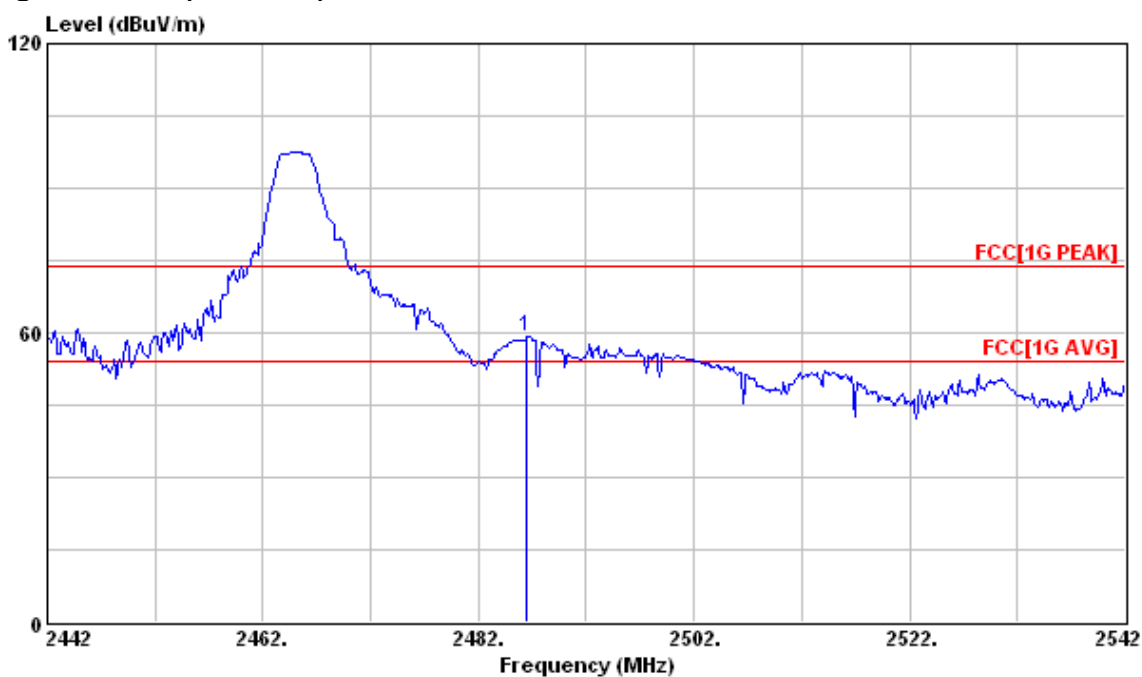


High Channel (2465MHz), V Polarization – AV.

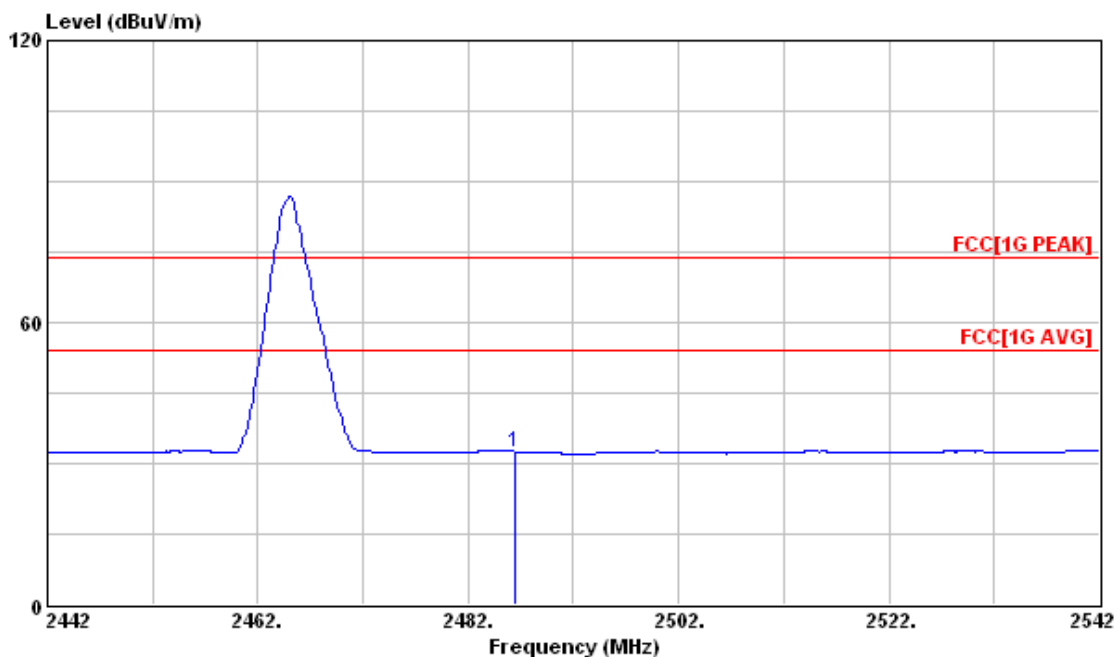

High Channel (2465MHz), H Polarization – PK.

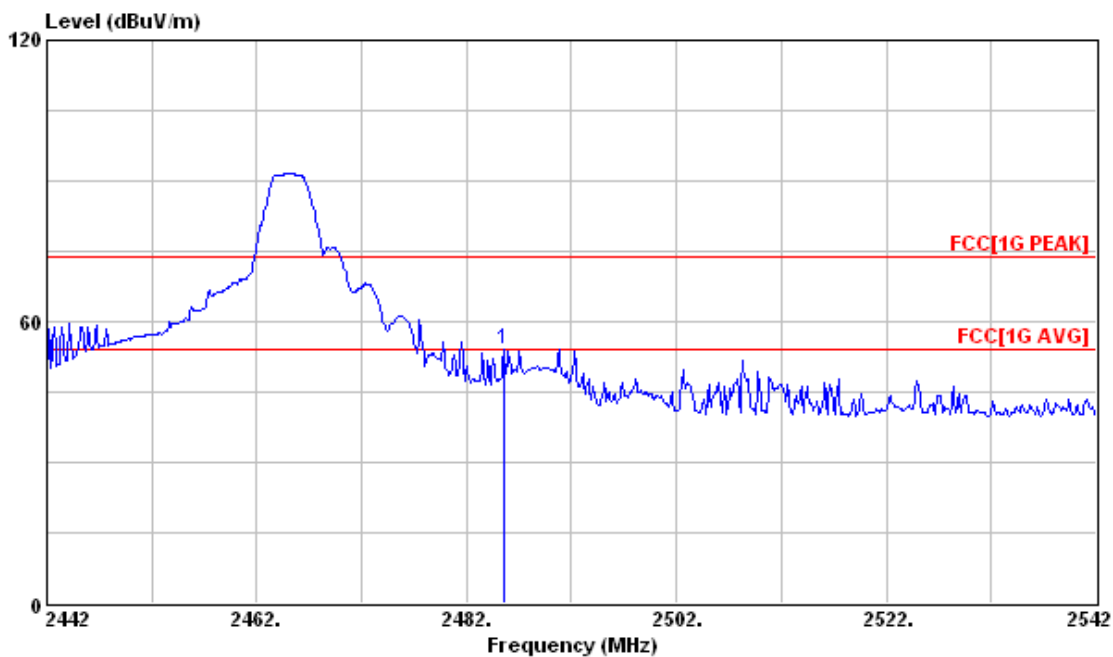

High Channel (2465MHz), H Polarization – AV.

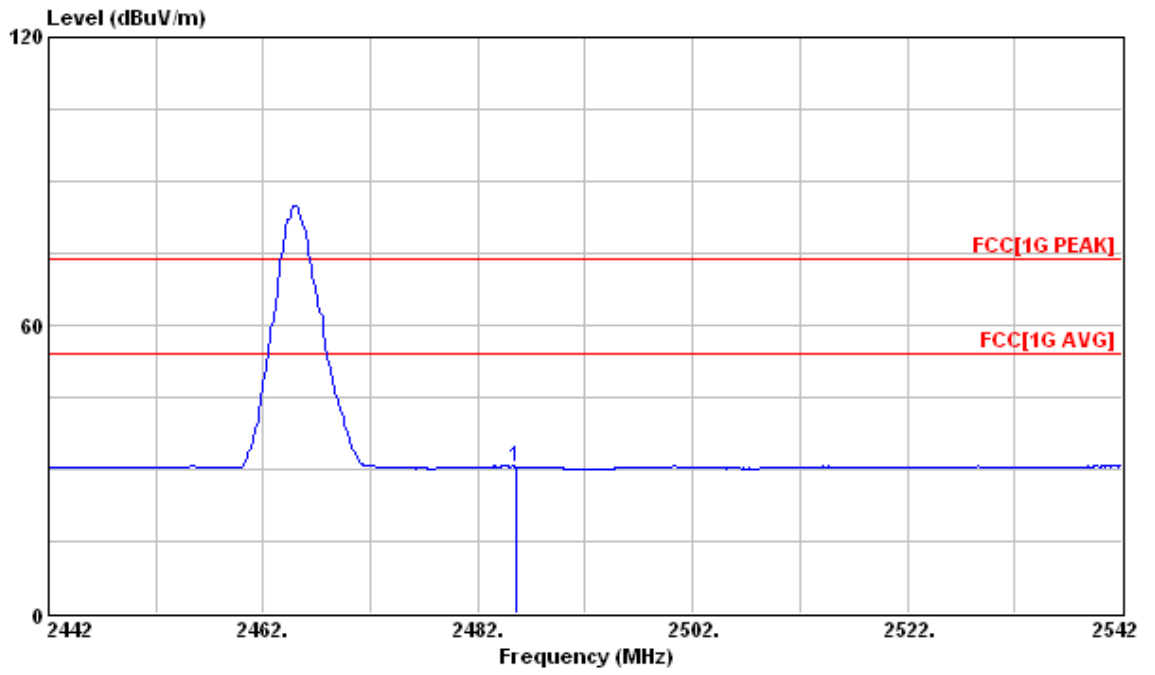

4 Hopping Channel Carrier Frequencies Spacing

Result: Pass

4.1 Applied standard

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No. /Serial No.	Last Calibration Date	Calibration Due Date
Spectrum Analyzer	Agilent	E4405B/ MY45106706	2010/3/24	2011/3/24
Chamber	NA	TR13	NCR	NCR

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
100kHz	300kHz	Peak	Maxhold	20dB Bandwidth
100kHz	300kHz	Peak	Maxhold	Carrier Spacing

Climatic Condition


Ambient Temperature : 22°C

Relative Humidity :60%

4.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data at lowest, middle and highest channel frequencies individually.
- c. Measurement the 20dB bandwidth and compare with 25kHz to determine the required carrier frequency spacing.
- d. According to FCC Public Notice DA00-705, Span = approximately 2 to 3 times the 20 dB bandwidth, RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW to measure 20dB bandwidth
- e. According to FCC Public Notice DA00-705, Span = wide enough to capture the peaks of two adjacent channels , Resolution Bandwidth (RBW) \geq 1% of the span, Video Bandwidth (VBW) \geq RBW to measure frequency spacing and compare with the required limit.

4.4 Test configuration

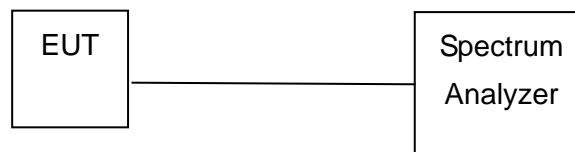

4.5 Test Data


20dB bandwidth

Test Mode : Continuous Transmitting Tester : Jun Kong


Operating Frequency (MHz)	20dB Bandwidth (kHz)
2415	1254
2442	1254
2465	1206

Measured 20dB bandwidth is 1254kHz. According to 15.247(a)(1), hopping channel carrier frequencies spacing should be greater than $2/3 \times 1254 = 836\text{kHz}$.


Low Channel (2415MHz)

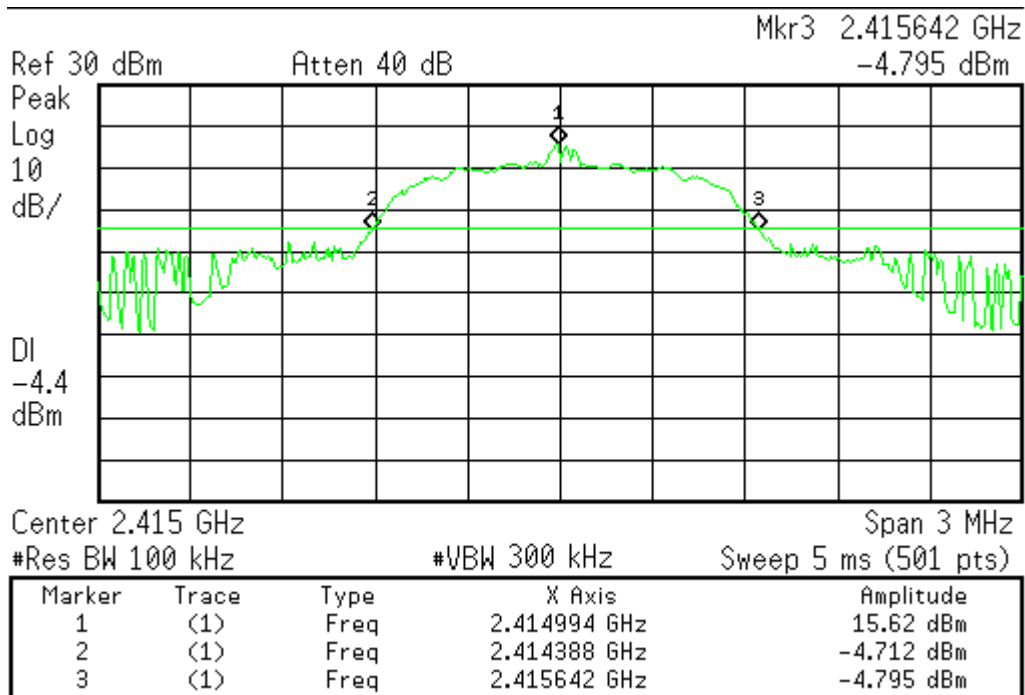

Middle Channel (2442MHz)

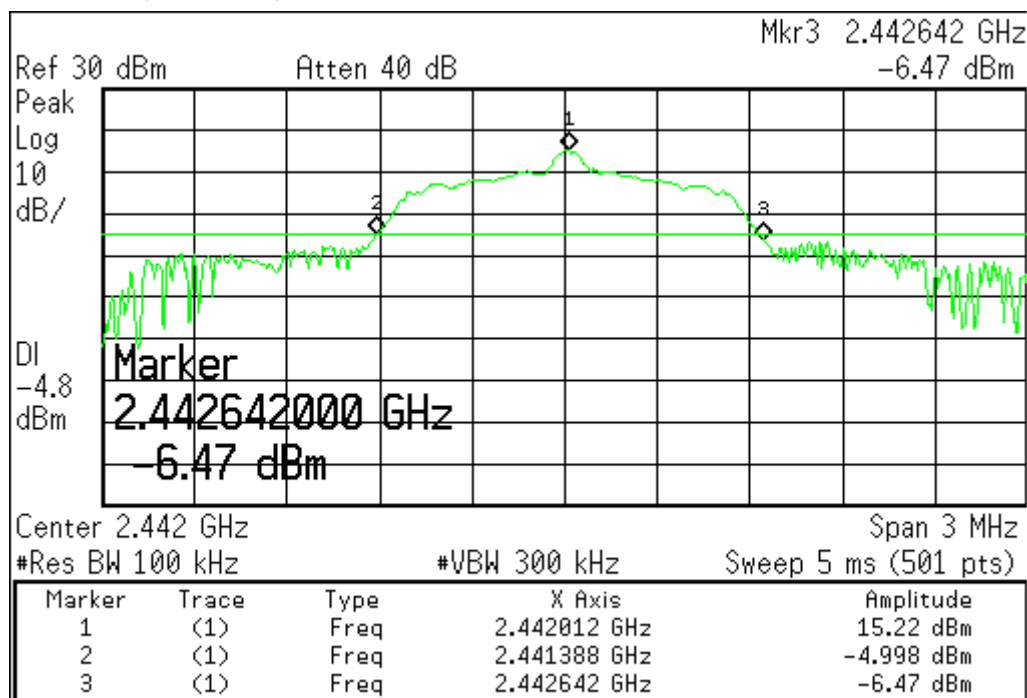

High Channel (2465MHz)

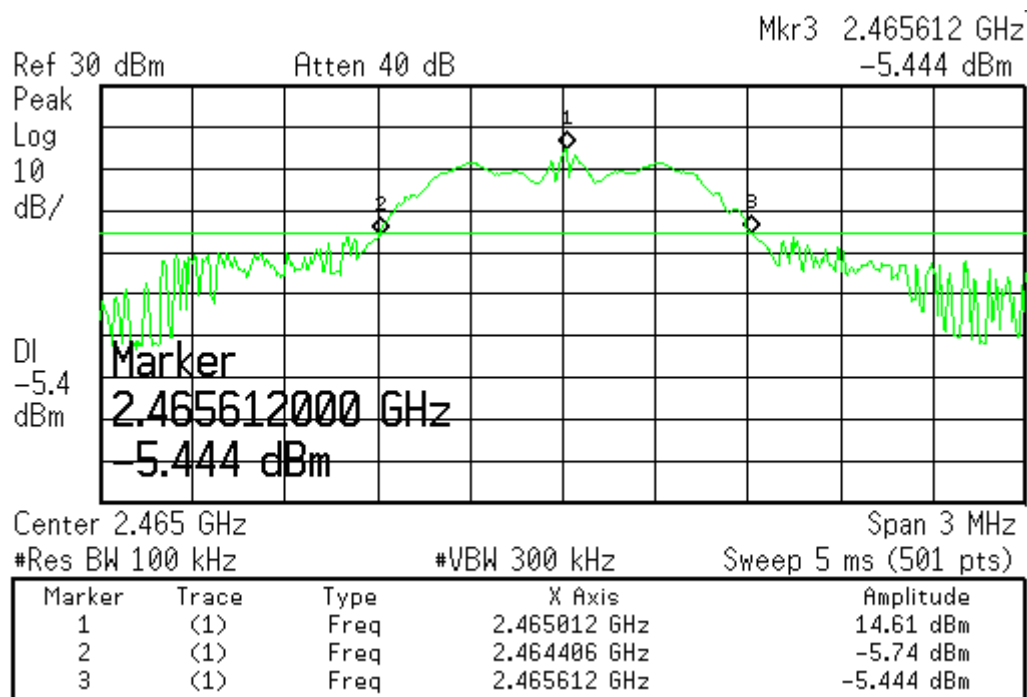


Hopping Channel Carrier Frequencies spacing

Test Mode : Continuous Transmitting


Tester : Jun Kong

Operating Frequency (MHz)	Carrier Spacing (kHz)	Limit (kHz)	Margin (kHz)
2415	1000	836	164
2442	1000	836	164
2465	1000	836	164


Low Channel (2415MHz)

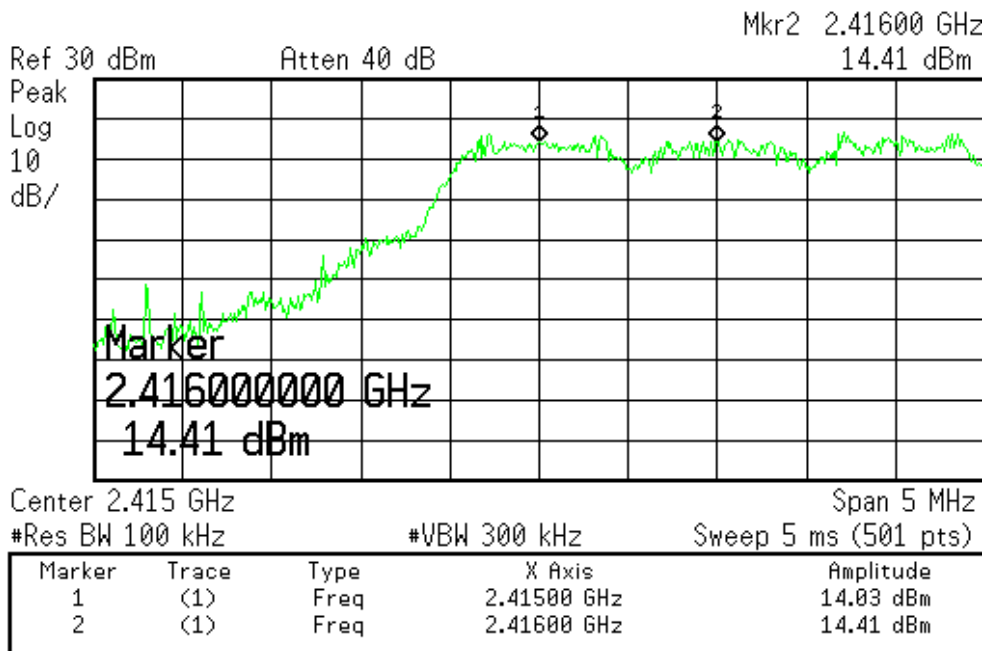

Middle Channel (2442MHz)

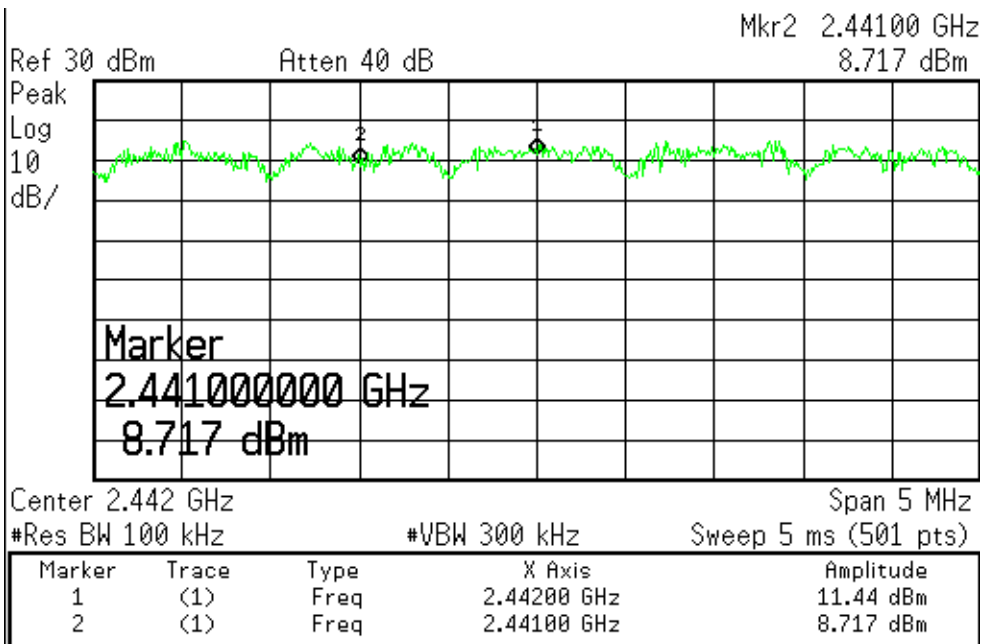

High Channel (2465MHz)

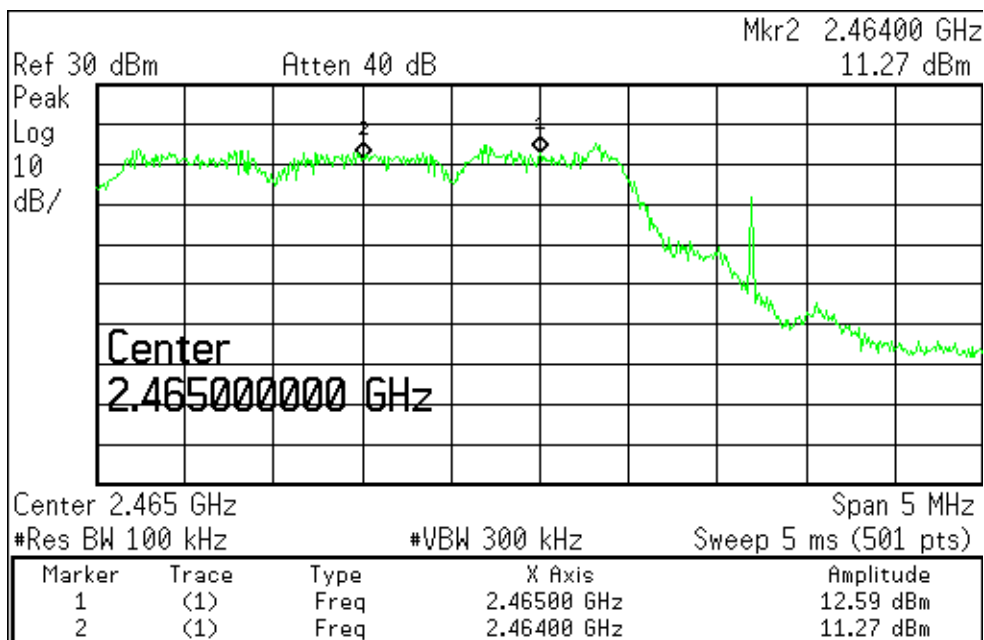

5 Number of Hopping Channels

Result: 51 Hopping Channels

5.1 Applied standard

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.2 Test Instruments

See section 4.2

Instrument Setting

RBW	VBW	Detector	Trace	Comment
100kHz	300kHz	Peak	Maxhold	

Climatic Condition

Ambient Temperature : 22°C

Relative Humidity :60%

5.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data at all channels.
- c. According to FCC Public Notice DA00-705, Span = the frequency band of operation , $RBW \geq 1\%$ of the span , $VBW \geq RBW$ to measure number of hopping channels and compare with the required limit.

5.4 Test configuration


See section 4.4.

5.5 Test Data


Test Mode : Continuous Transmitting

Tester : Jun Kong


2415-2417MHz

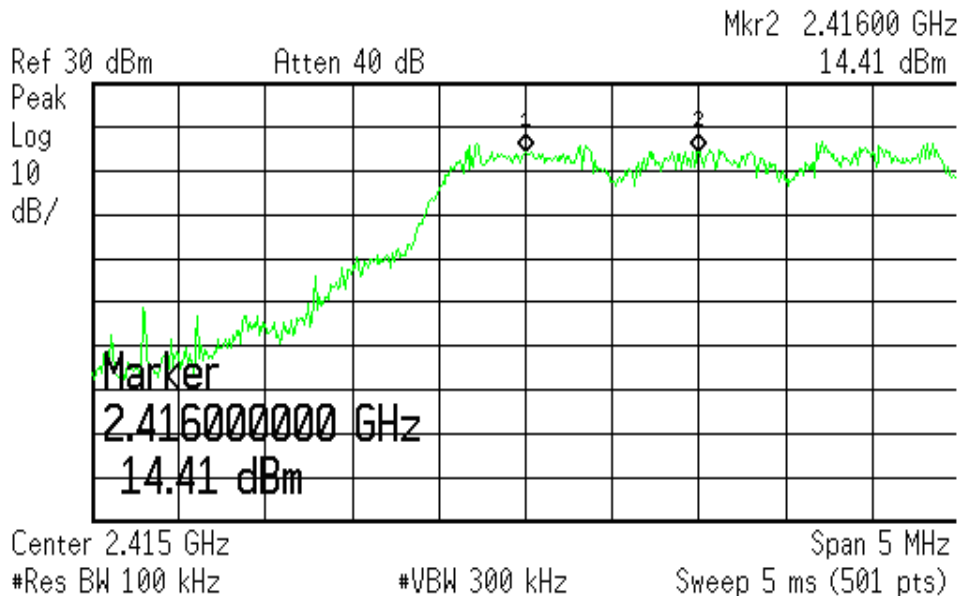


2417-2425MHz

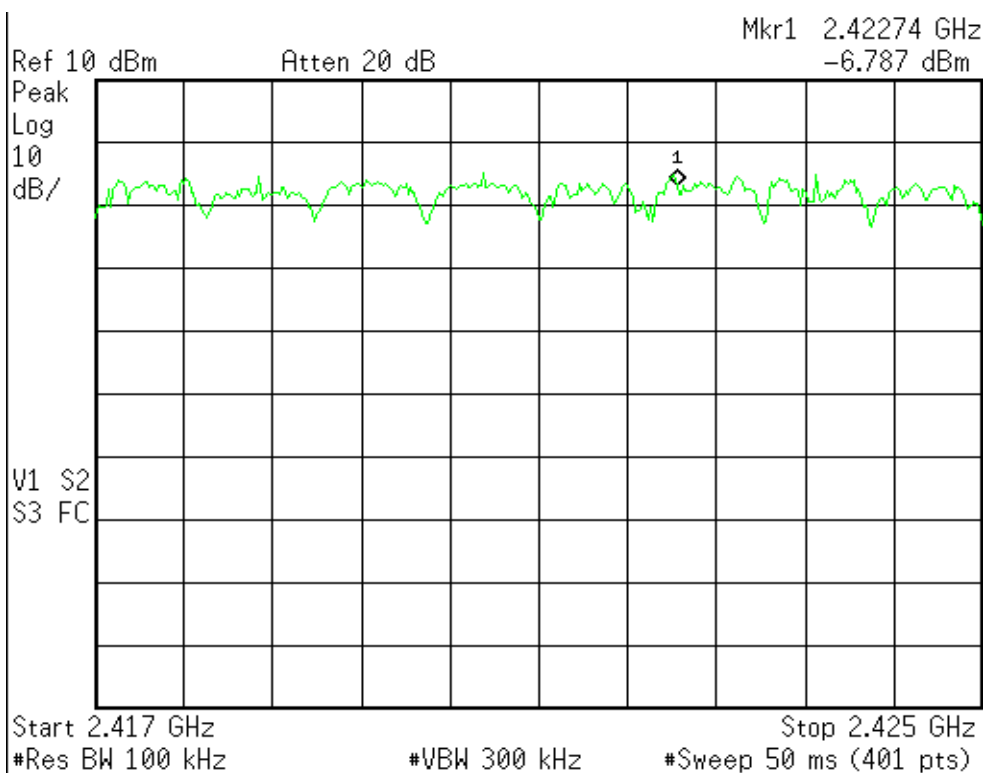


2425-2435MHz

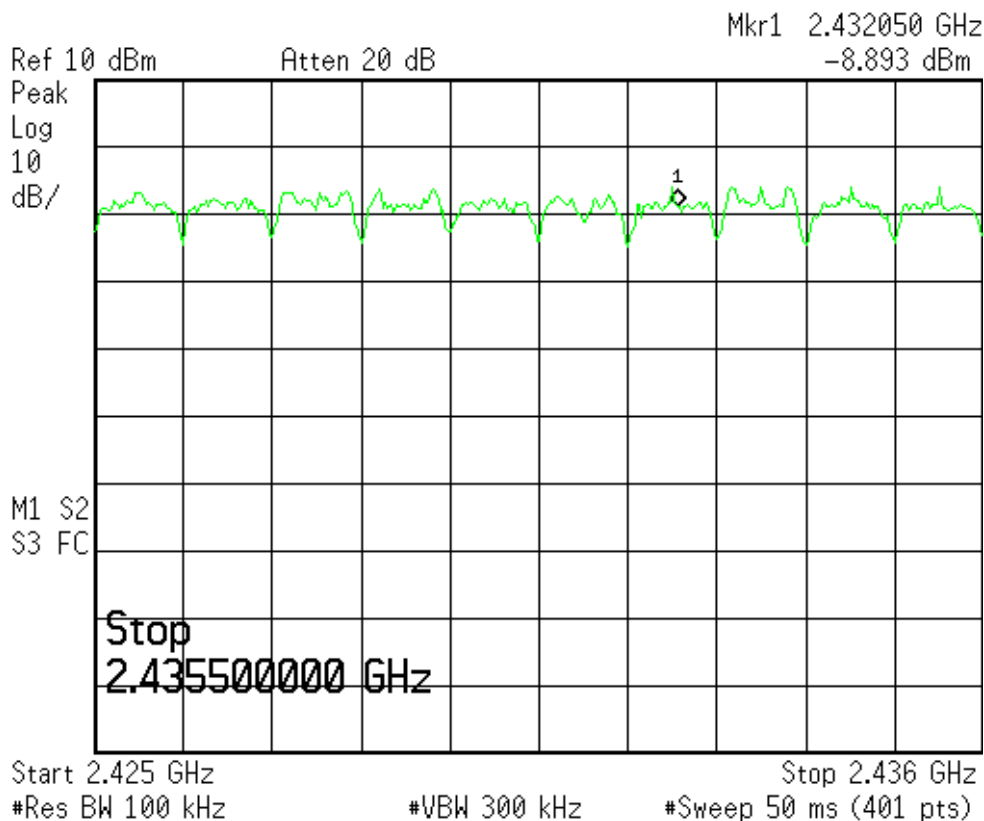


2435-2445MHz

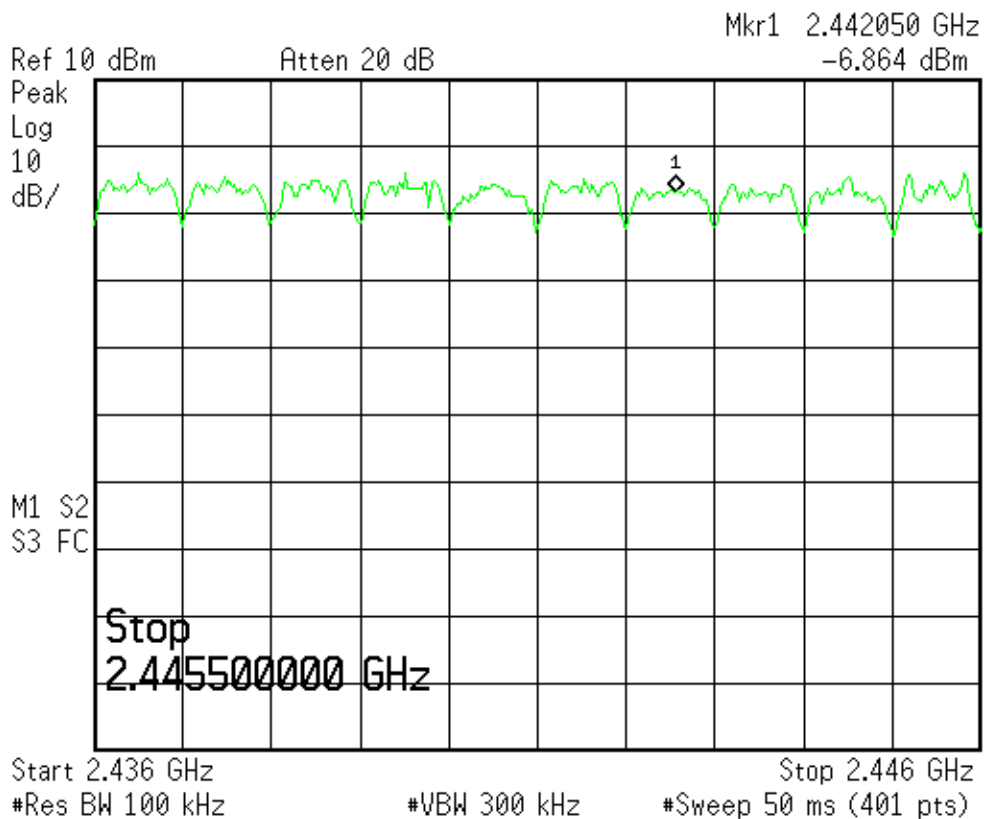

2445-2455MHz

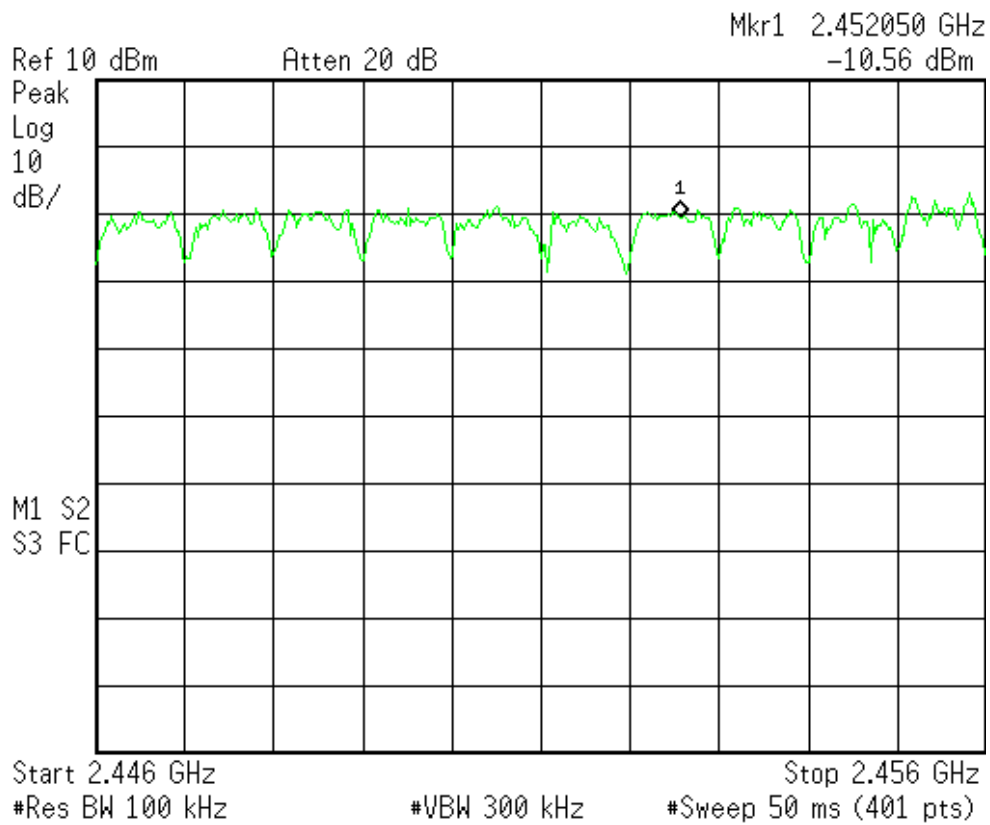

2455-2465MHz

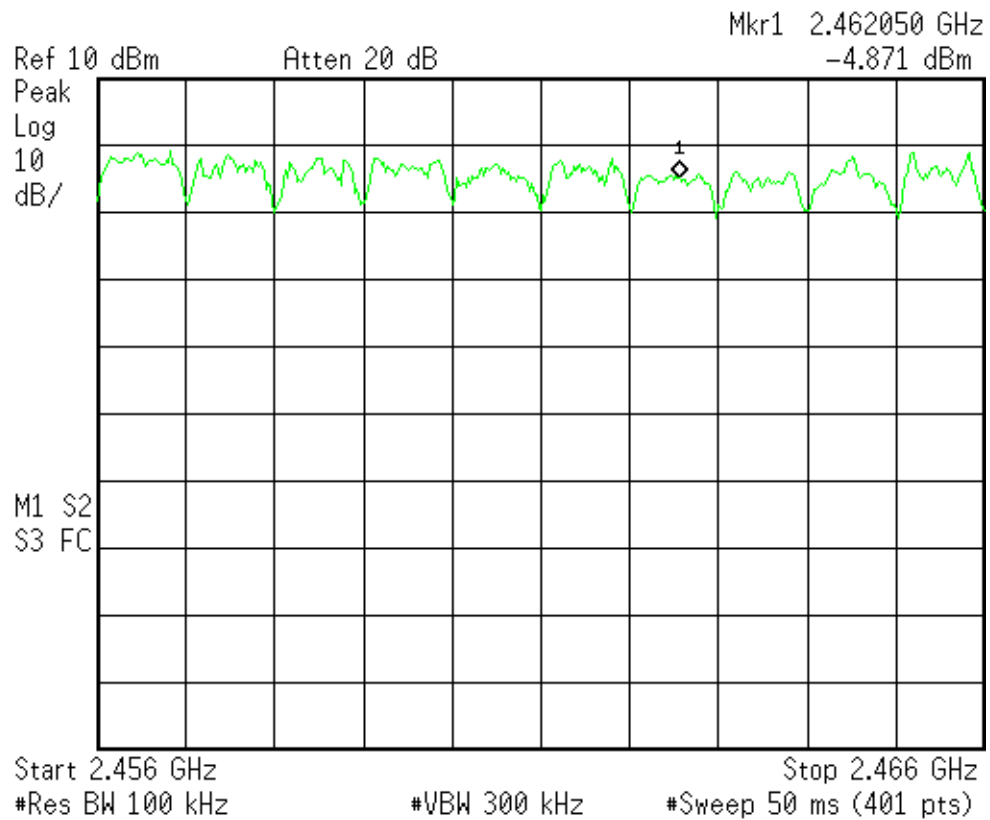

6 Radiated Emission

Result: Pass

6.1 Applied standard

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

6.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Test Receiver	R&S	ESCI/100019	2010/5/18	2011/5/18
Spectrum Analyzer	Agilent	E4407B/ MY45106795	2010/5/3	2011/5/3
Broadband Antenna	EMCO	3142C/52088	2010/5/17	2011/5/17
Antenna	EMCO	3117/57408	2010/3/4	2011/3/4
Antenna	EMCO	3116/58959	2010/1/31	2011/1/31
PRE-AMPLIFIER	MITEQ	AFS6-02001800-35- 10P-6/949196	2009/9/10	2010/09/10
Pre-amplifier	MITEQ	JS4-00101800-28-1 0P/1498978	2009/11/8	2010/11/8
Pre-amplifier	Mini Circuit	ZKL-2/004	2010/2/5	2011/2/5
RF Cable	N/A	N/A/C0080	2010/8/6	2011/2/6
RF Cable	N/A	N/A/C0081	2010/4/21	2010/10/21
Semi - anechoic Chamber	ETS. LINDGREN	TR11/ 906-A	2010/4/19	2011/4/19

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR : No Calibration Required.
3. The calibration date of the semi-anechoic chamber listed above is the date of NSA measurement.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
120kHz	N/A	Quasi-Peak	Maxhold	Below 1GHz
1MHz	3MHz	Peak	Maxhold	Above 1GHz, Peak
1MHz	10Hz	Peak	Maxhold	Above 1GHz, Average

Climatic Condition



Ambient Temperature : 24°C

Relative Humidity :53%

6.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.
- c. If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 meters above the reference ground plane in the semi-anechoic chamber. If the EUT is floor-standing equipment, it was placed on a non-conducted support with a height of 12 millimeters above the reference ground plane in the semi-anechoic chamber.
- d. The EUT was set 3m away from the interference receiving antenna.
- e. Rapidly sweep the signal in the test frequency range by using the spectrum through the Maximum-peak detector.
- f. According to FCC Public Notice DA00-705 to set the spectrum analyzer.
- g. Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4 meters above the reference ground plane continuously to determine at least six frequencies associated with higher emission levels and record them.
- h. The beamwidth of receiving horn antenna should keep covering EUT when the receiving horn antenna height varied.
- i. Then measure each frequency found from step f. by using the spectrum with rotating the EUT and positioning the receiving antenna height to determine the maximum level.
- j. For measurement of frequency below 1000MHz, set the receiver detector to be Quasi-Peak per CISPR 16-1 to find out the maximum level occurred.
- k. For measurement of frequency above 1000MHz, set the spectrum detector to be Peak or Average to find out the maximum level occurred, if any.
- l. Record frequency, azimuth angle of the turntable, height, and polarization of the receiving antenna and compare the maximum level with the required limit.
- m. Change the receiving antenna to another polarization to measure radiated emission by following step e. to k. again.
- n. If the peak emission level below 1000MHz measured from step j. is 4dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate Q.P. value will be measured and presented.
- o. If the peak emission level above 1000MHz measured from step k. is 20dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate A.V. value will be measured and presented.


6.4 Test configuration

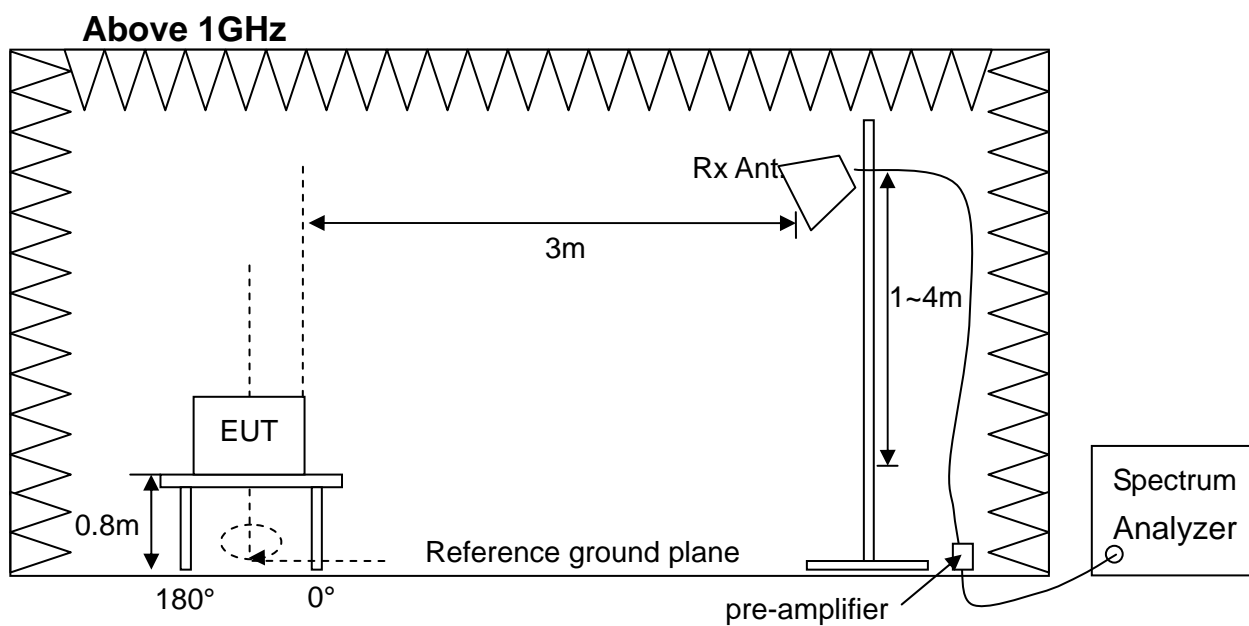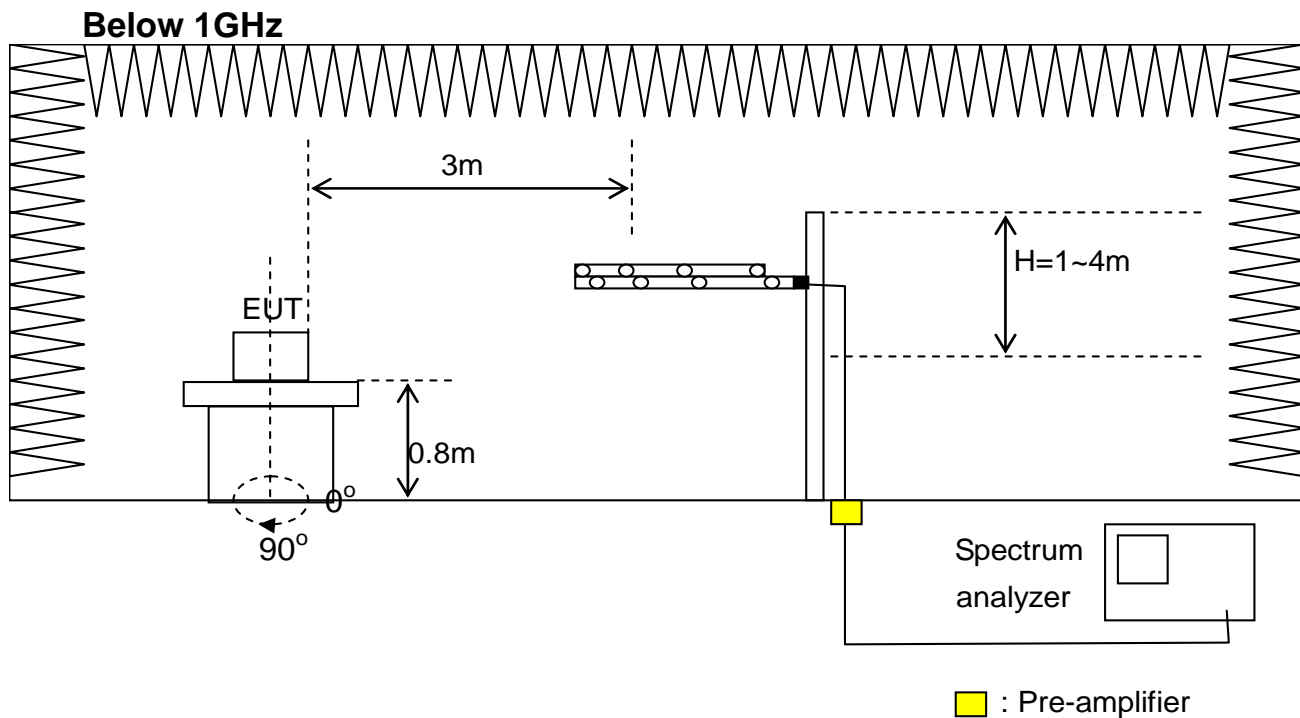

6.5 Test Data

Radiated Emission Measurement below 1000MHz

Test Mode : 2415MHz, Continuous Transmitting
Test Distance : 3m **Tester** : Jacky
Polarization : Vertical **Frequency Range** : 30MHz~1000MHz

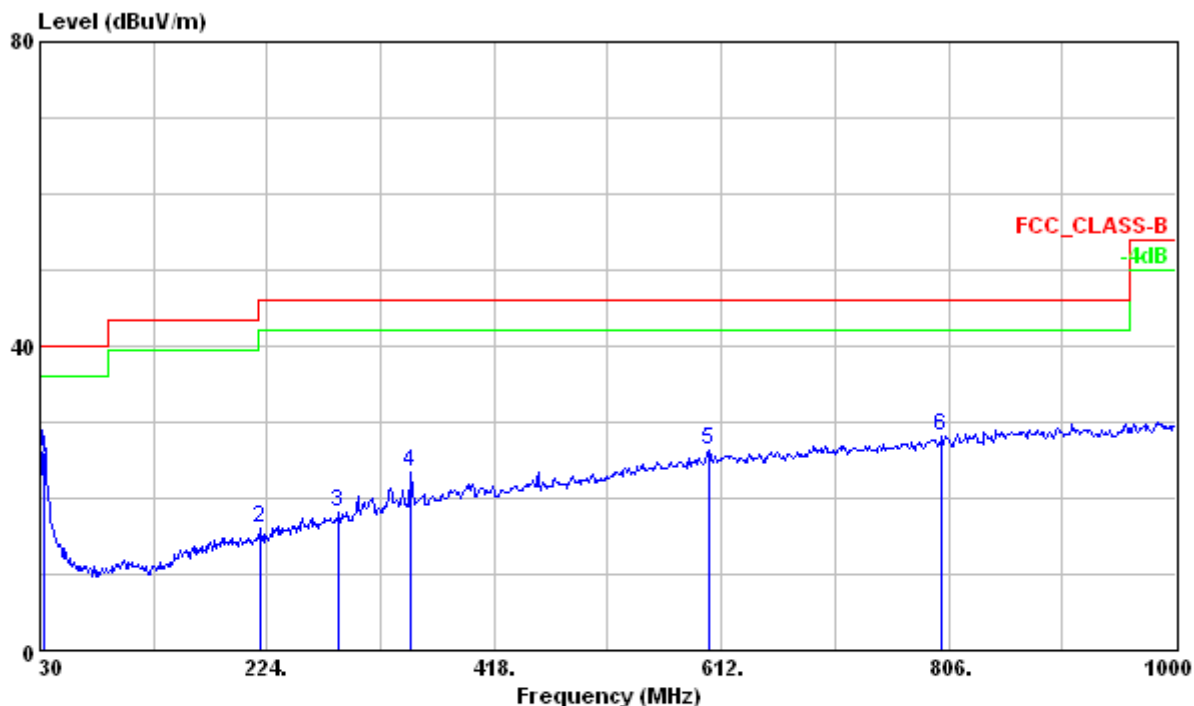

	Freq	Level	Factor	Read Level	Limit	Over	Ant	Table		
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	Pos	Pos	Pol/Phase	Remark
							cm	deg		
1	33.240	26.10	-10.52	36.62	40.00	-13.90	100	125	VERTICAL	QP
2	217.920	16.16	-15.32	31.48	46.00	-29.84	---	---	VERTICAL	Peak
3	284.880	18.17	-13.09	31.26	46.00	-27.83	---	---	VERTICAL	Peak
4	346.900	23.37	-10.59	33.96	46.00	-22.63	---	---	VERTICAL	Peak
5	601.000	26.21	-4.73	30.94	46.00	-19.79	---	---	VERTICAL	Peak
6	799.800	28.16	-2.33	30.49	46.00	-17.84	---	---	VERTICAL	Peak

Note :

- Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
- Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Mode : 2415MHz, Continuous Transmitting

Test Distance : 3m

Tester : Jacky

Polarization : Horizontal

Frequency Range : 30MHz~1000MHz

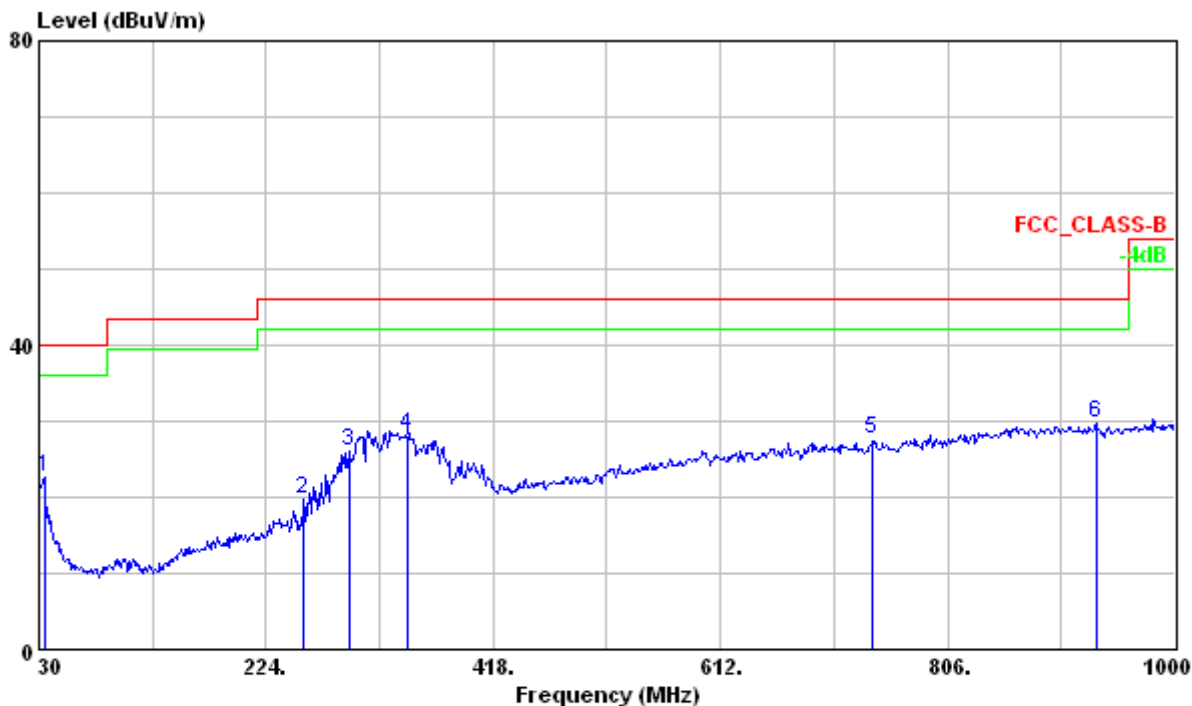

	Freq	Level	Factor	Read Level	Limit	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	34.590	22.65	-11.28	33.93	40.00	-17.35	---	---	HORIZONTAL	Peak
2	255.720	19.65	-13.82	33.47	46.00	-26.35	---	---	HORIZONTAL	Peak
3	294.330	26.07	-12.77	38.84	46.00	-19.93	---	---	HORIZONTAL	Peak
4	344.800	28.25	-10.67	38.92	46.00	-17.75	100	250	HORIZONTAL	QP
5	741.700	27.50	-2.98	30.48	46.00	-18.50	---	---	HORIZONTAL	Peak
6	932.800	29.64	-0.63	30.27	46.00	-16.36	---	---	HORIZONTAL	Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Mode : 2442MHz, Continuous Transmitting

Test Distance : 3m

Tester : Jacky

Polarization : Vertical

Frequency Range : 30MHz~1000MHz

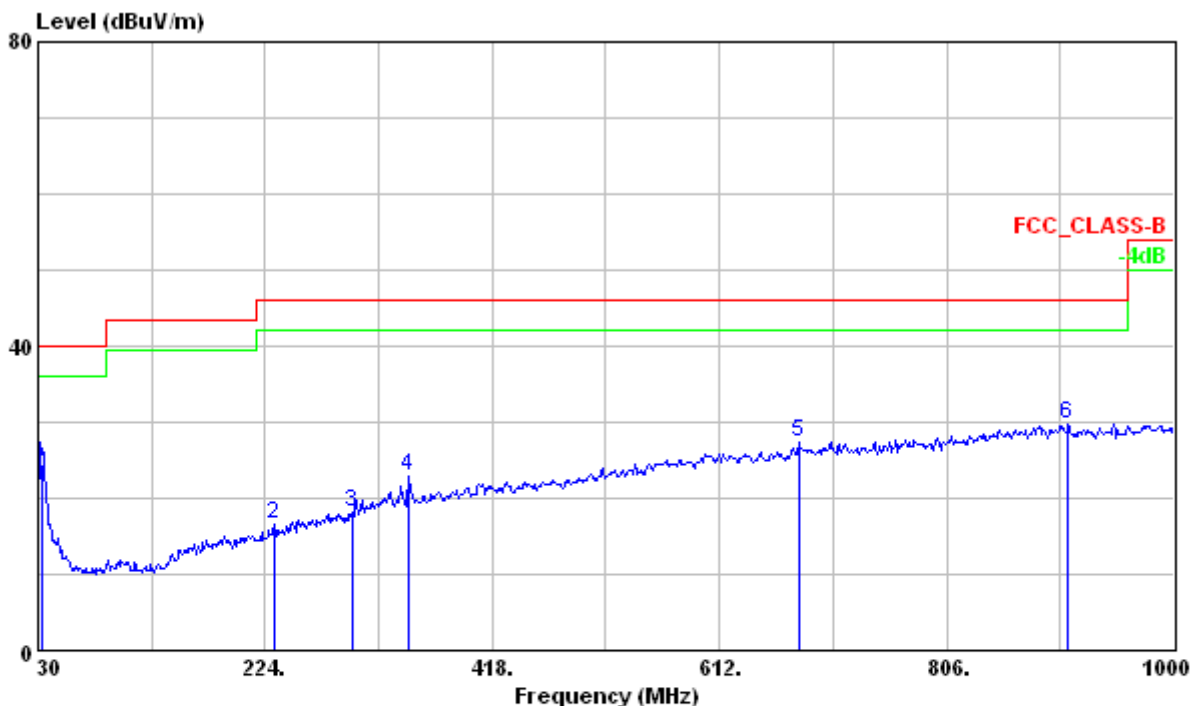

	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.780	24.45	-10.82	35.27	40.00	-15.55	100	175	VERTICAL	QP
2	231.420	16.56	-14.61	31.17	46.00	-29.44	---	---	VERTICAL	Peak
3	298.380	18.25	-12.47	30.72	46.00	-27.75	---	---	VERTICAL	Peak
4	346.900	22.88	-10.59	33.47	46.00	-23.12	---	---	VERTICAL	Peak
5	680.100	27.47	-3.60	31.07	46.00	-18.53	---	---	VERTICAL	Peak
6	909.700	29.79	-0.69	30.48	46.00	-16.21	---	---	VERTICAL	Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Mode : 2442MHz, Continuous Transmitting

Test Distance : 3m

Tester : Jacky

Polarization : Horizontal

Frequency Range : 30MHz~1000MHz

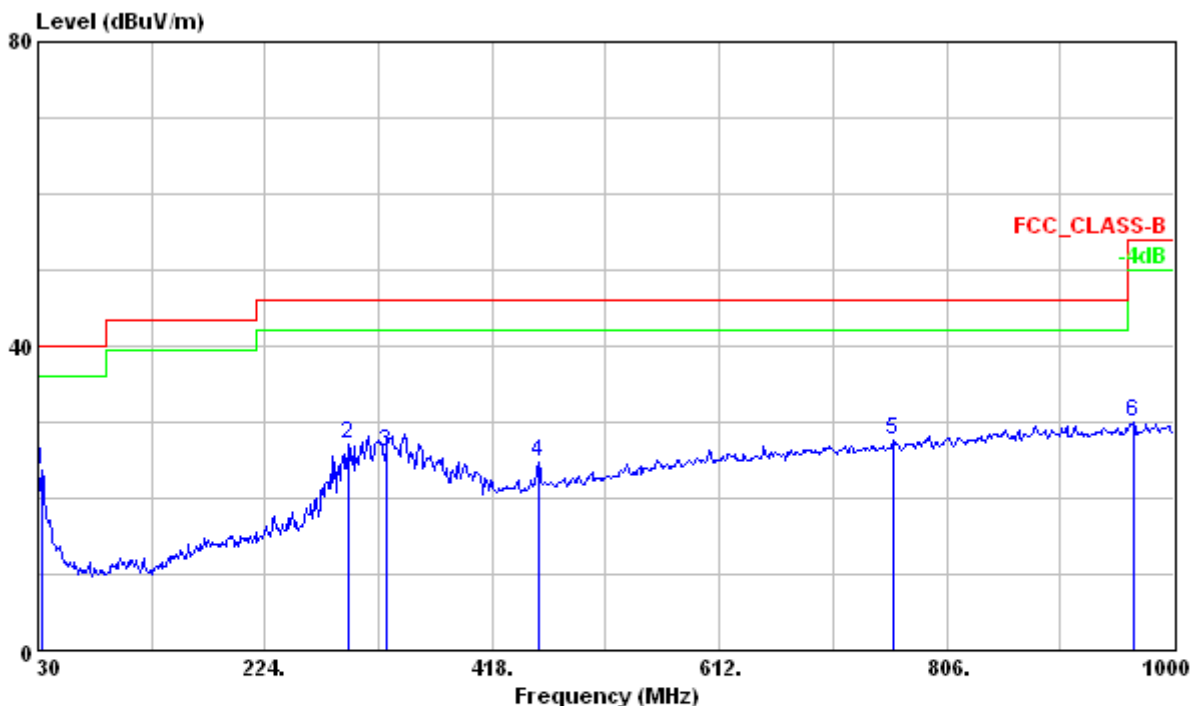


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.240	23.64	-10.52	34.16	40.00	-16.36	---	---	HORIZONTAL	Peak
2	295.140	27.09	-12.71	39.80	46.00	-18.91	---	---	HORIZONTAL	Peak
3	327.300	26.08	-11.33	37.41	46.00	-19.92	120	300	HORIZONTAL	QP
4	457.500	24.84	-7.95	32.79	46.00	-21.16	---	---	HORIZONTAL	Peak
5	760.600	27.56	-2.83	30.39	46.00	-18.44	---	---	HORIZONTAL	Peak
6	966.400	30.06	-0.44	30.50	54.00	-23.94	---	---	HORIZONTAL	Peak

Note :

- Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
- Emission Level (dBUV/m) = Reading Data + Correction Factor

Test Model : 2465MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Polarization : Vertical Frequency Range : 30MHz~1000MHz

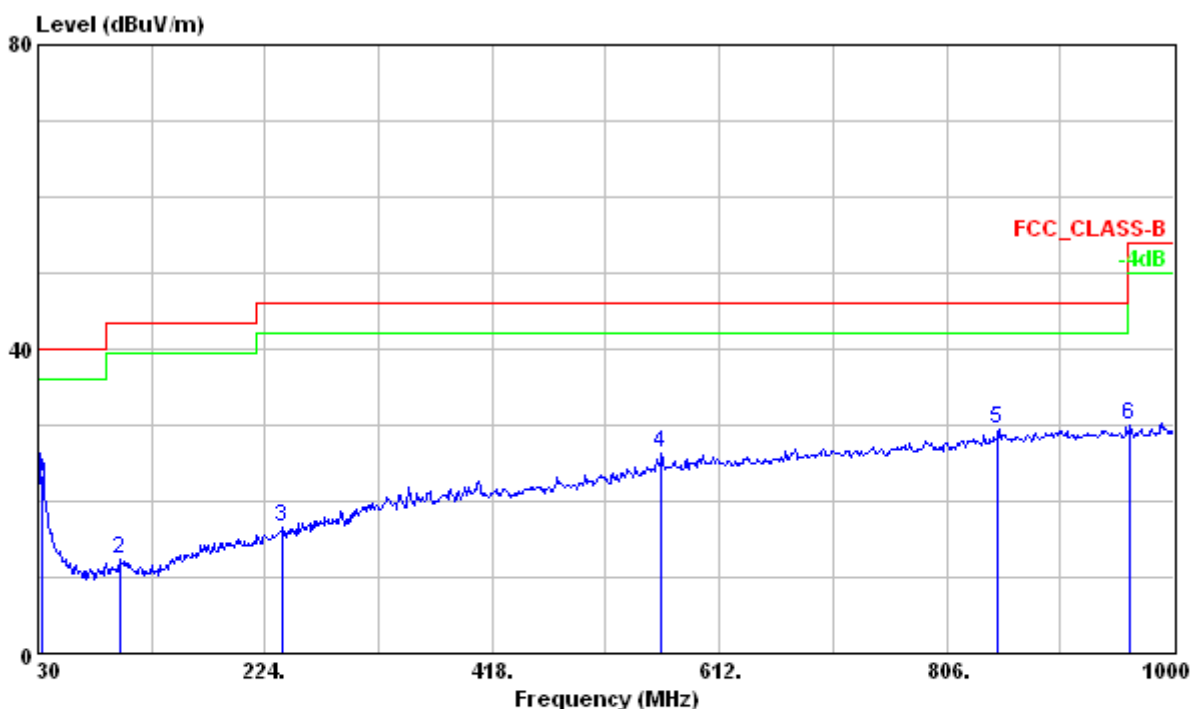


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.780	23.47	-10.82	34.29	40.00	-16.53	100	177	VERTICAL	QP
2	100.200	12.45	-18.66	31.11	43.50	-31.05	---	---	VERTICAL	Peak
3	238.980	16.67	-14.36	31.03	46.00	-29.33	---	---	VERTICAL	Peak
4	562.500	26.36	-5.54	31.90	46.00	-19.64	---	---	VERTICAL	Peak
5	850.200	29.51	-1.36	30.87	46.00	-16.49	---	---	VERTICAL	Peak
6	962.900	30.03	-0.46	30.49	54.00	-23.97	---	---	VERTICAL	Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor

Test Model : 2465MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Polarization : Horizontal Frequency Range : 30MHz~1000MHz

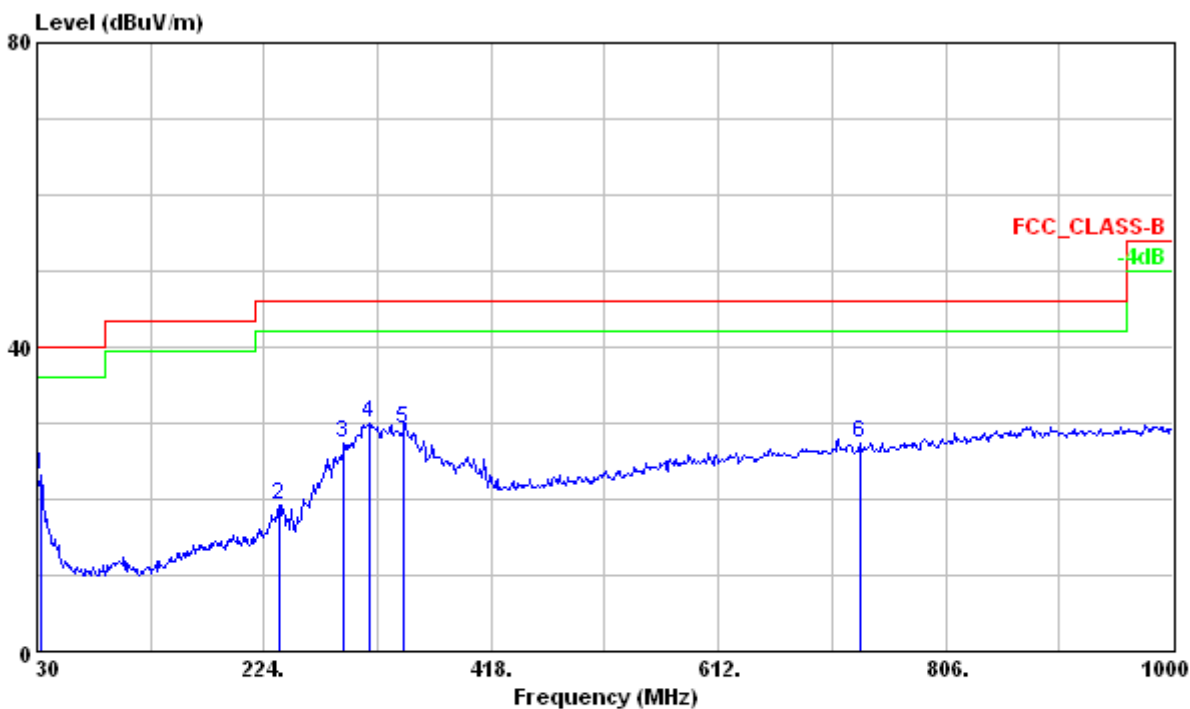


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.240	23.14	-10.52	33.66	40.00	-16.86	---	---	HORIZONTAL	Peak
2	236.280	19.18	-14.45	33.63	46.00	-26.82	---	---	HORIZONTAL	Peak
3	291.630	27.49	-12.97	40.46	46.00	-18.51	---	---	HORIZONTAL	Peak
4	313.300	29.97	-11.84	41.81	46.00	-16.03	---	---	HORIZONTAL	Peak
5	343.400	29.28	-10.71	39.99	46.00	-16.72	125	52	HORIZONTAL	QP
6	732.600	27.42	-3.00	30.42	46.00	-18.58	---	---	HORIZONTAL	Peak

Note :

- Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
- Emission Level (dBuV/m) = Reading Data + Correction Factor

Radiated Emission Measurement above 1000MHz

Test Model : 2415MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Antenna Polarization : Vertical Frequency Range :1GHz~25GHz

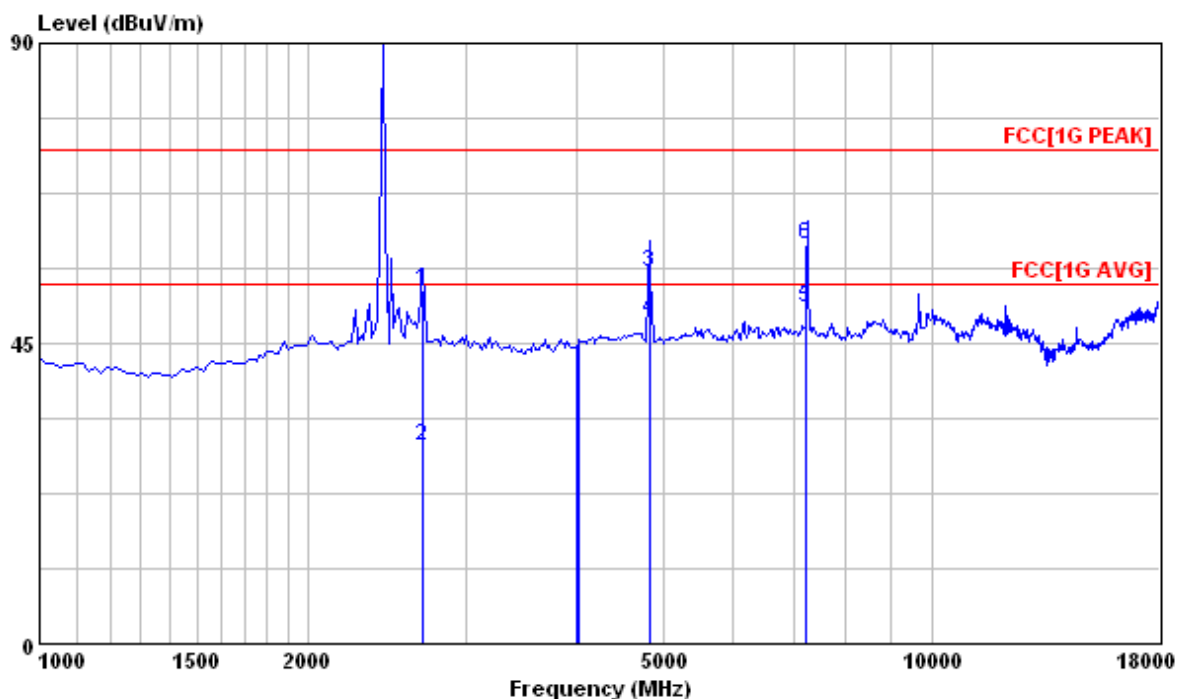


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	2683.500	52.89	-35.81	88.70	74.00	-21.11	100	63	VERTICAL	Peak
2	2683.500	29.73	-35.81	65.54	54.00	-24.27	100	63	VERTICAL	Average
3	4830.750	55.63	-33.12	88.75	74.00	-18.37	125	0	VERTICAL	Peak
4	4830.750	48.43	-33.12	81.55	54.00	-5.57	125	0	VERTICAL	Average
5	7244.175	50.21	-28.44	78.65	54.00	-3.79	100	155	VERTICAL	Average
6	7244.175	59.83	-28.44	88.27	74.00	-14.17	100	155	VERTICAL	Peak

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Model : 2415MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Antenna Polarization : Horizontal Frequency Range :1GHz~25GHz

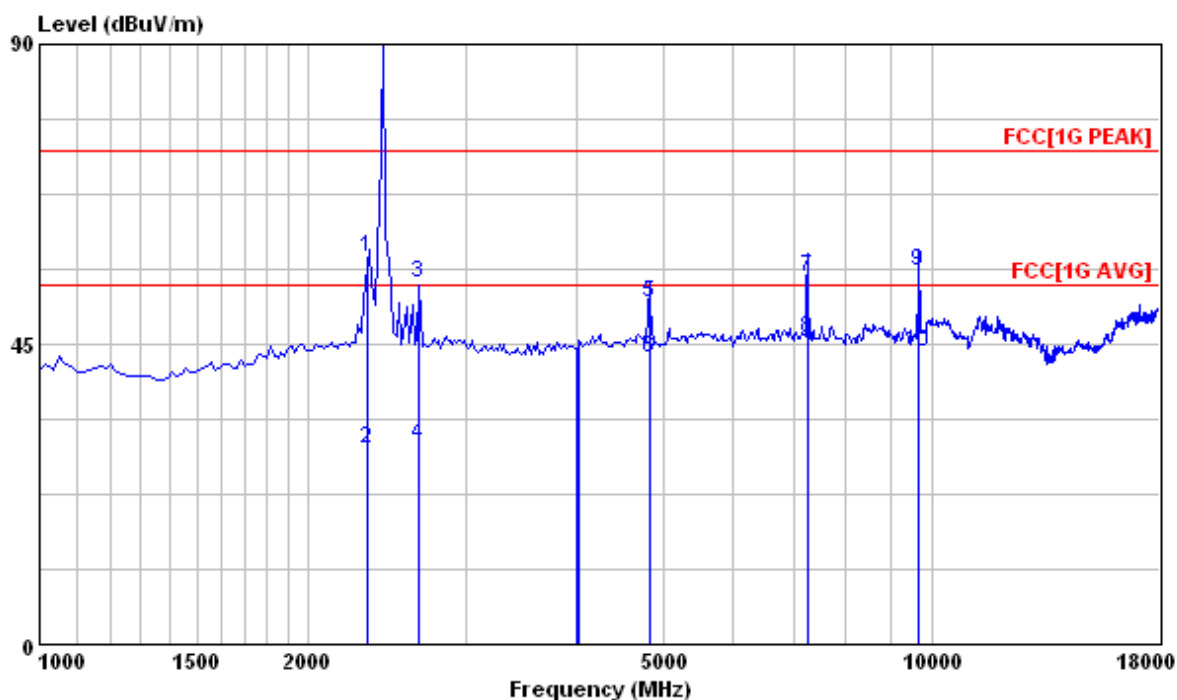


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	2329.500	57.90	-36.29	94.19	74.00	-16.10	100	260	HORIZONTAL	Peak
2	2329.500	29.30	-36.29	65.59	54.00	-24.70	100	260	HORIZONTAL	Average
3	2654.550	54.09	-35.86	89.95	74.00	-19.91	103	145	HORIZONTAL	Peak
4	2654.550	29.99	-35.86	65.85	54.00	-24.01	103	145	HORIZONTAL	Average
5	4829.400	51.14	-33.12	84.26	74.00	-22.86	130	225	HORIZONTAL	Peak
6	4829.400	42.81	-33.12	75.93	54.00	-11.19	130	225	HORIZONTAL	Average
7	7245.975	55.21	-28.43	83.64	74.00	-18.79	100	228	HORIZONTAL	Peak
8	7245.975	45.78	-28.43	74.21	54.00	-8.22	100	228	HORIZONTAL	Average
9	9658.825	55.95	-24.43	80.38	74.00	-18.05	183	118	HORIZONTAL	Peak
10	9658.825	43.91	-24.43	68.34	54.00	-10.09	183	118	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Model : 2442MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Antenna Polarization : Vertical Frequency Range :1GHz~25GHz

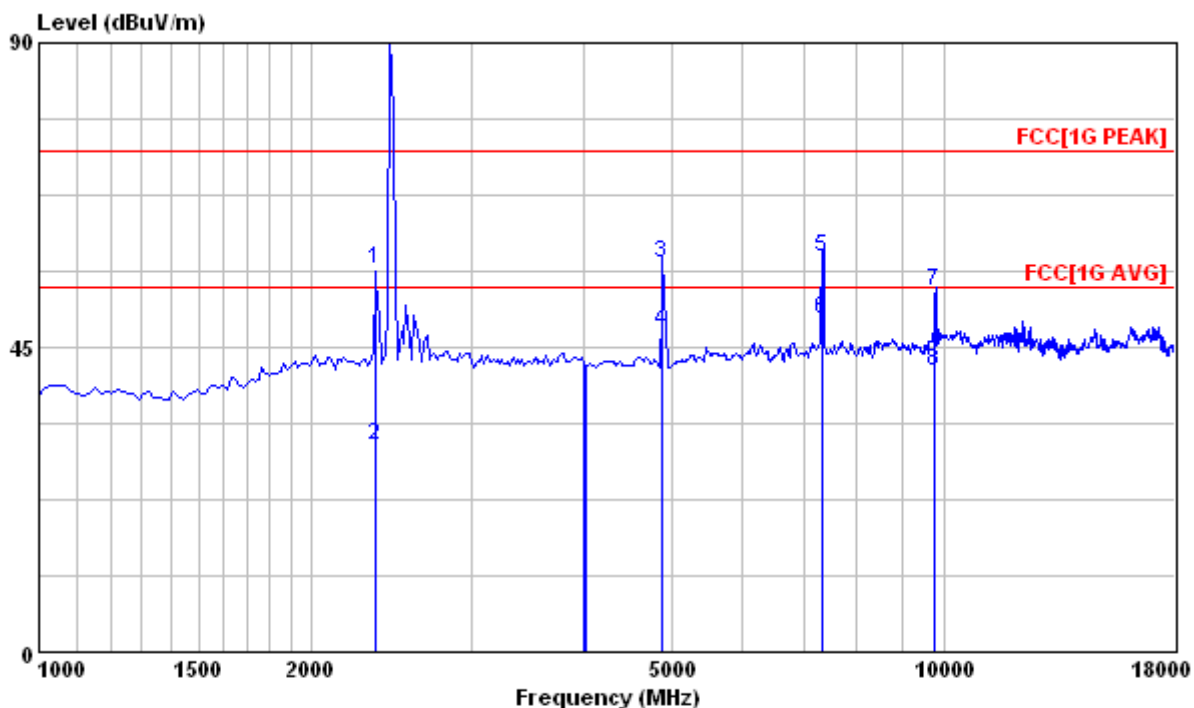


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	2355.400	56.48	-36.19	92.67	74.00	-17.52	120	230	VERTICAL	Peak
2	2355.400	30.40	-36.19	66.59	54.00	-23.60	120	230	VERTICAL	Average
3	4884.725	57.57	-33.08	90.65	74.00	-16.43	115	161	VERTICAL	Peak
4	4884.725	47.38	-33.08	80.46	54.00	-6.62	115	161	VERTICAL	Average
5	7326.900	58.30	-28.47	86.77	74.00	-15.70	121	329	VERTICAL	Peak
6	7326.900	49.06	-28.47	77.53	54.00	-4.94	121	329	VERTICAL	Average
7	9768.250	53.28	-24.36	77.64	74.00	-20.72	160	0	VERTICAL	Peak
8	9768.250	41.56	-24.36	65.92	54.00	-12.44	160	0	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Model : 2442MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Antenna Polarization : Horizontal Frequency Range :1GHz~25GHz

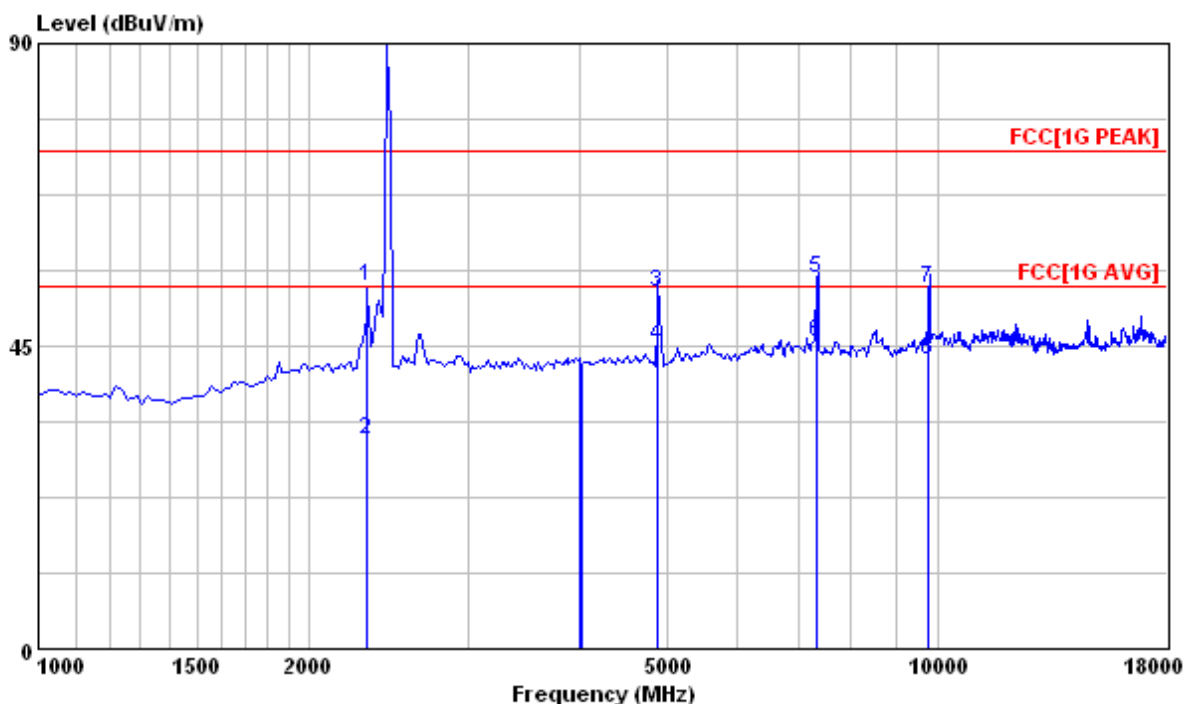


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	2313.980	53.90	-36.35	90.25	74.00	-20.10	160	63	HORIZONTAL	Peak
2	2313.980	30.98	-36.35	67.33	54.00	-23.02	160	63	HORIZONTAL	Average
3	4884.625	52.85	-33.08	85.93	74.00	-21.15	106	216	HORIZONTAL	Peak
4	4884.625	45.10	-33.08	78.18	54.00	-8.90	106	216	HORIZONTAL	Average
5	7326.950	54.99	-28.47	83.46	74.00	-19.01	102	227	HORIZONTAL	Peak
6	7326.950	45.68	-28.47	74.15	54.00	-8.32	102	227	HORIZONTAL	Average
7	9766.775	53.47	-24.36	77.83	74.00	-20.53	100	265	HORIZONTAL	Peak
8	9766.775	42.90	-24.36	67.26	54.00	-11.10	100	265	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Model : 2465MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Antenna Polarization : Vertical Frequency Range :1GHz~25GHz

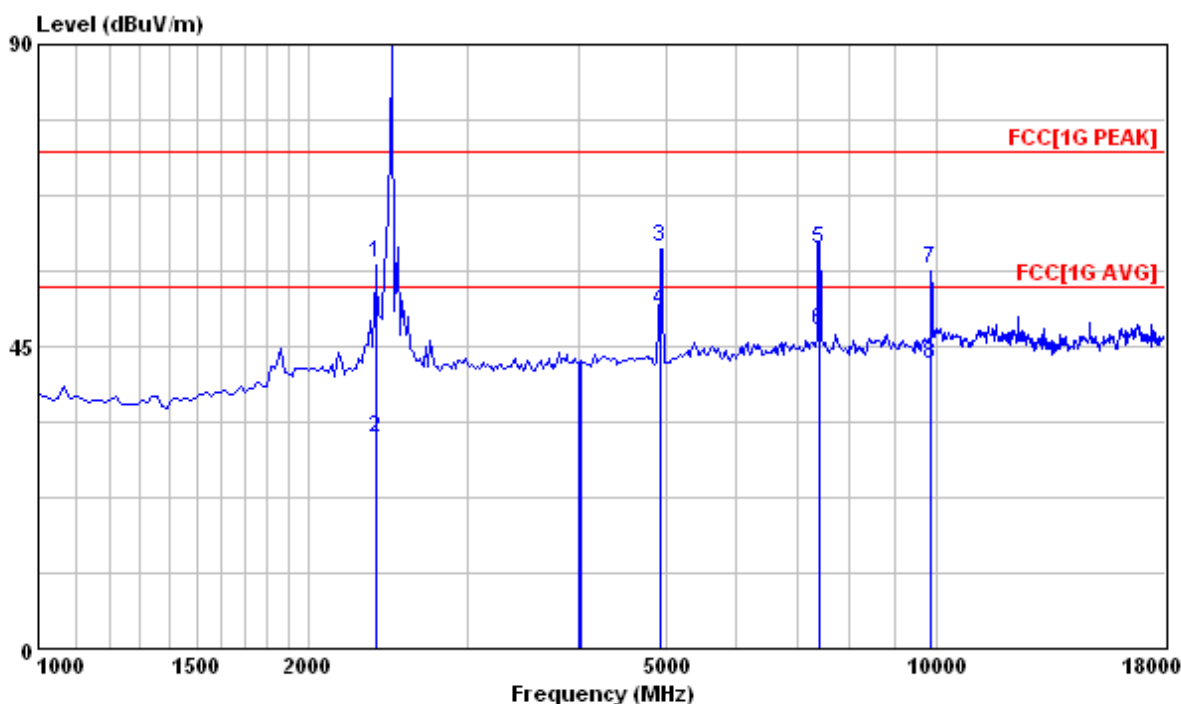


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	2374.500	57.30	-36.13	93.43	74.00	-16.70	114	104	VERTICAL	Peak
2	2374.500	31.26	-36.13	67.39	54.00	-22.74	114	104	VERTICAL	Average
3	4930.625	59.79	-33.02	92.81	74.00	-14.21	100	67	VERTICAL	Peak
4	4930.625	50.44	-33.02	83.46	54.00	-3.56	100	67	VERTICAL	Average
5	7396.125	59.60	-28.55	88.15	74.00	-14.40	100	170	VERTICAL	Peak
6	7396.125	47.25	-28.55	75.80	54.00	-6.75	100	170	VERTICAL	Average
7	9858.750	56.52	-24.09	80.61	74.00	-17.48	100	106	VERTICAL	Peak
8	9858.750	42.40	-24.09	66.49	54.00	-11.60	100	106	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Model : 2465MHz, Continuous Transmitting
 Test Distance : 3m Tester : Jacky
 Antenna Polarization : Horizontal Frequency Range :1GHz~25GHz

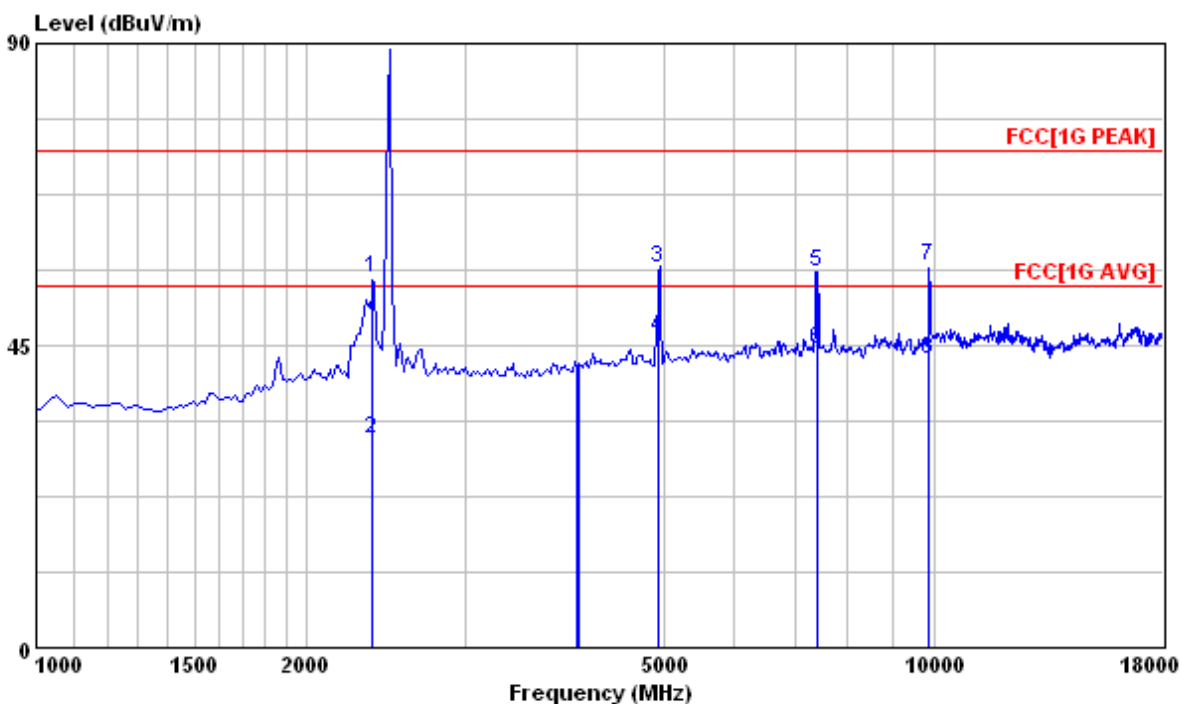

	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	2370.500	55.18	-36.14	91.32	74.00	-18.82	137	180	HORIZONTAL	Peak
2	2370.500	31.09	-36.14	67.23	54.00	-22.91	137	180	HORIZONTAL	Average
3	4930.650	56.51	-33.02	89.53	74.00	-17.49	100	230	HORIZONTAL	Peak
4	4930.650	46.29	-33.02	79.31	54.00	-7.71	100	230	HORIZONTAL	Average
5	7395.950	56.02	-28.55	84.57	74.00	-17.98	147	233	HORIZONTAL	Peak
6	7395.950	44.34	-28.55	72.89	54.00	-9.66	147	233	HORIZONTAL	Average
7	9861.450	56.74	-24.08	80.82	74.00	-17.26	100	174	HORIZONTAL	Peak
8	9861.450	42.89	-24.08	66.97	54.00	-11.11	100	174	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

7 Dwell Time

Result: Pass

7.1 Applied standard

According to 15.247(a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Spectrum Analyzer	Agilent	E4405B/ MY45106706	2010/3/24	2011/3/24
Chamber	NA	TR13	NCR	NCR

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR: No Calibration Required.

Instrument Setting

RBW	VBW	Span	Detector	Comment
1MHz	1MHz	0Hz	Peak	

Climatic Condition


Ambient Temperature : 22°C

Relative Humidity :60%

7.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data with the same packet type.
- c. According to FCC Public Notice DA00-705, Span = zero span, RBW = 1 MHz, VBW \geq RBW to measure the single packet duration time
- d. Change the transmitting packet type and repeat the step b.
- e. Calculate the dwell time and compare with the required limit.

7.4 Test configuration

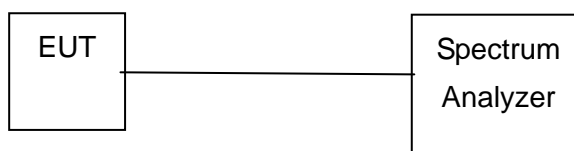


7.5 Test Data


Test Mode : Continuous Transmitting Tester : Jun Kong

Operating Frequency (MHz)	Single Packet Duration Time (ms)	Hopping number (1/s)	Dwell Time (ms)	Limit (ms)	Margin (ms)
2442	10	0.97	197.88	400	202.12

Note:

1. Hopping Cycle(second) = $51 \times 0.4 = 20.4$
2. Dwell Time (ms) = Single Packet Duration Time X Hopping number X Hopping Cycle
3. Margin (ms) = Limit – Dwell Time

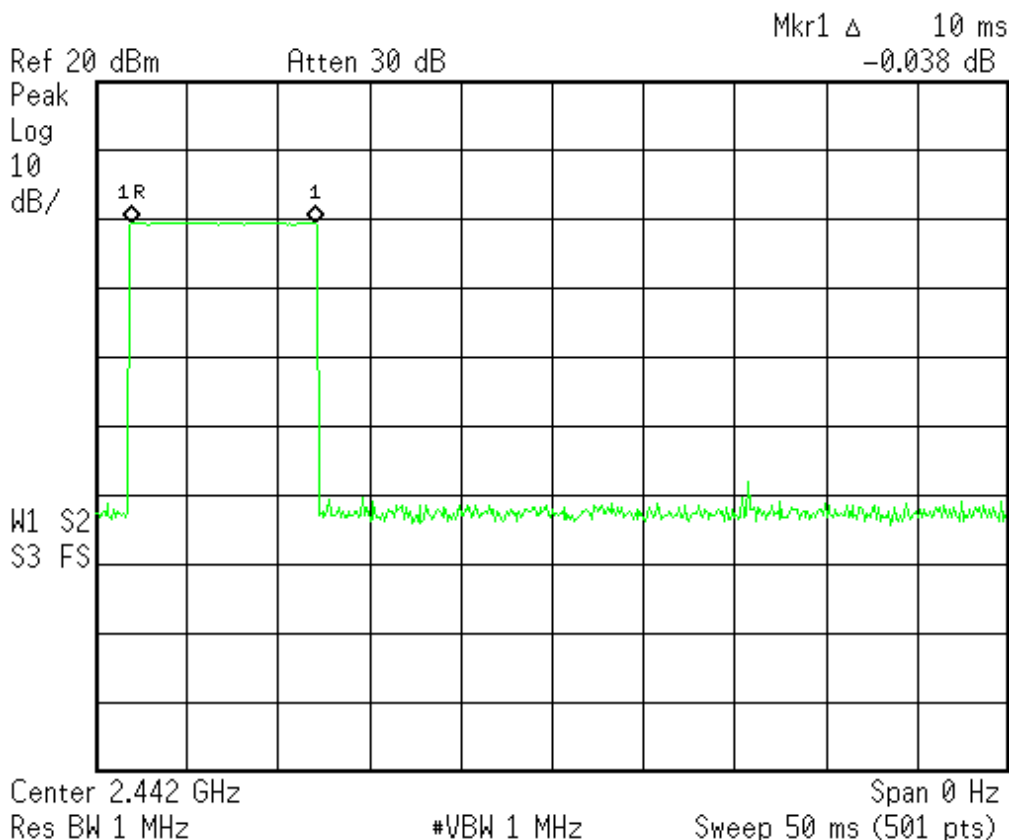

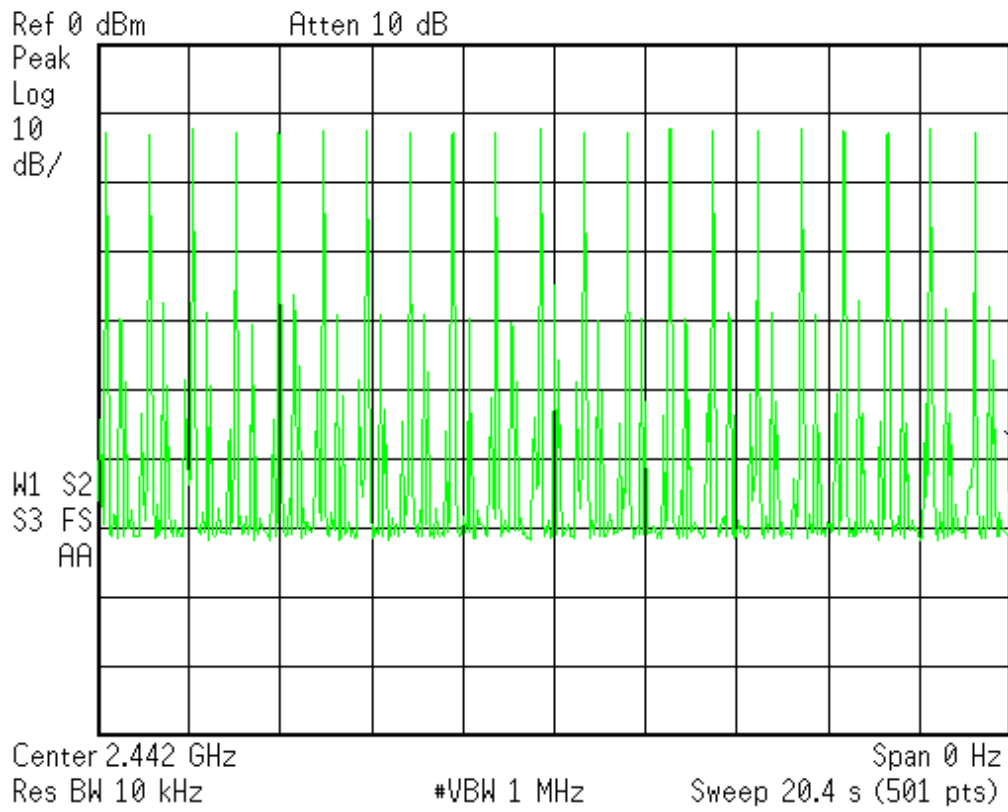

8 Antenna Requirement

8.1 Applied standard

According to 15.247(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

8.2 Antenna Information

This antenna's relative information as follow:

Brand	Model	Frequency Range (MHz)	Gain (dBi)	Comment
SANWA	WINCAB-RF-032	2415 ~ 2465	1.1	



8.3 Result

Gain of the antenna is less than 6dBi.