

F C C - TEST REPORT

REPORT NO.: 39183A/4/400F

FCC – Test Report

Date: 2004-08-11

No. 39183A/4/400F

Page 2 of 14

**FCC listed testlab
acc. to Section 2.948 of the FCC - Rules
in compliance with the requirements of
ANSI C63.4 - 1992**

Product : 49MHz Remote Control
Transmitter

Product Class : Low Power Communication
Device Transmitter

Model : 718001

Applicant : ARTIN INDUSTRIAL CO LTD

FCC – Test Report

No. 39183A/4/400F

Date: 2004-08-11

Page 3 of 14

TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure (> 30MHz)
8. Radiated Emission Testprocedure (9kHz-30MHz)
9. Interference Radiation (Datasheet)
10. Time Domain Plot
11. Time Domain Plot
12. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)
13. Measurement of Emissions within Band Edges (Band Edges Plot)
14. Notes for Measurement of Emissions within Band Edges

FCC – Test Report

No. 39183A/4/400F

Date: 2004-08-11

Page 4 of 14

LABORATORY - REPORT

APPLICANT: ARTIN INDUSTRIAL CO LTD
ADDRESS: 2/F, Lee Sum Factory Building
21-25 Sze Mei Street
San Po Kong, Kowloon
HONG KONG

DATE OF SAMPLE RECEIVED: 2004-7-28

DATE OF TESTING: 2004-08-03 to 2004-08-05

DESCRIPTION OF SAMPLE:

Product: 49MHz Remote Control Transmitter
Product class: Low Power Communication Device Transmitter
Model number: 718001
Rating: DC 9V ('6F22' Size Battery x 1)

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations
Part 15 Subpart C - Intentional Radiators

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature

Remark: 1. Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests.
2. The conducted emissions test (if applicable) has considered the limits in Sections 15.107 and 15.207 adopted under FCC 02-157 (ETDocket 98-80). The product may be marketed after July 11, 2005, and is not affected by the 15.37(j) transition provisions.

FCC – Test Report

No. 39183A/4/400F

Date: 2004-08-11

Page 5 of 14

Summary of Test Results

Interference Radiation:

Test result: O.K.
Test data: See attached data sheet


Interference Voltage:

Test result: N.A.
Test data: N.A.

Measurement of Emissions within Band Edges

Test result: O.K.
Test data: See attached data sheet

PHOTOGRAPH OF THE SAMPLE

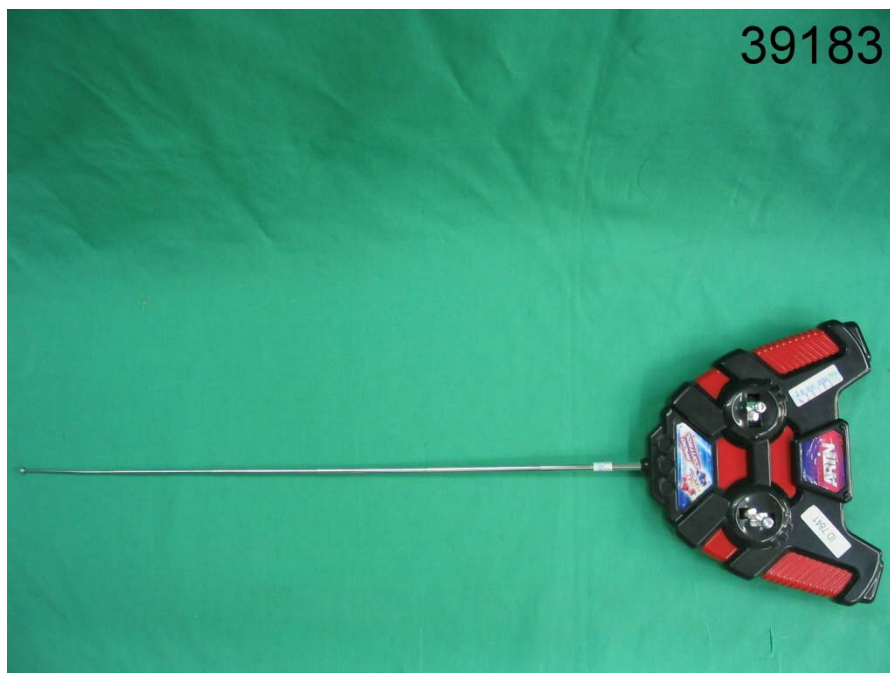

FCC – Test Report

No. 39183A/4/400F

Date: 2004-08-11

Page 6 of 14

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	150KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	9KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,000 MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,000 MHz
Test Receiver	Rohde & Schwarz	ESHS30	839667/002	9KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVS30	828525/006	25MHz – 1000MHz
Spectrum Analyzer with Q. Peak	Advantest	R3132	140101852	9KHz – 3GHz
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	0.15MHz – 1000MHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	--
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	--
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	8127312	2 x 10A, 50Ω, 50μH 9KHz-30MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	8127309	2 x 10A, 50Ω, 50μH 9KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Loop Antenna	Rohde & Schwarz	HFH2-Z2	871336/48	9KHz-30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm


FCC – Test Report

No. 39183A/4/400F

Date: 2004-08-11

Page 7 of 14

Radiated Emission Test Procedure (> 30MHz)

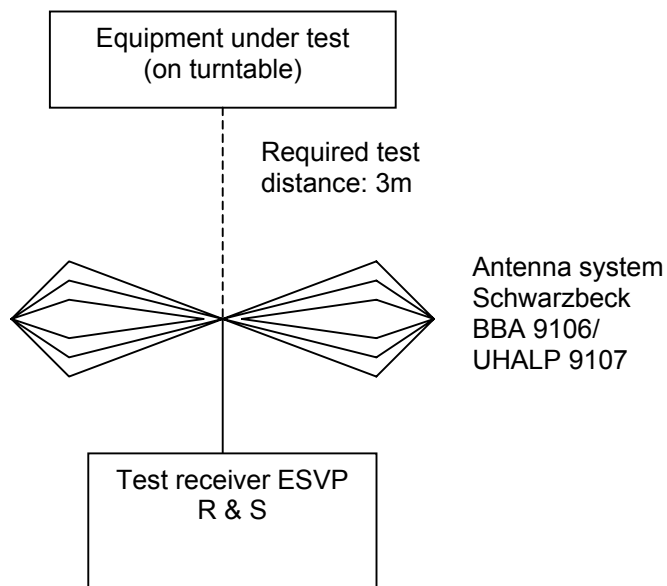


FCC – Test Report

No. 39183A/4/400F

Date: 2004-08-11

Page 8 of 14

Radiated Emission Test Procedure (9kHz – 30MHz)

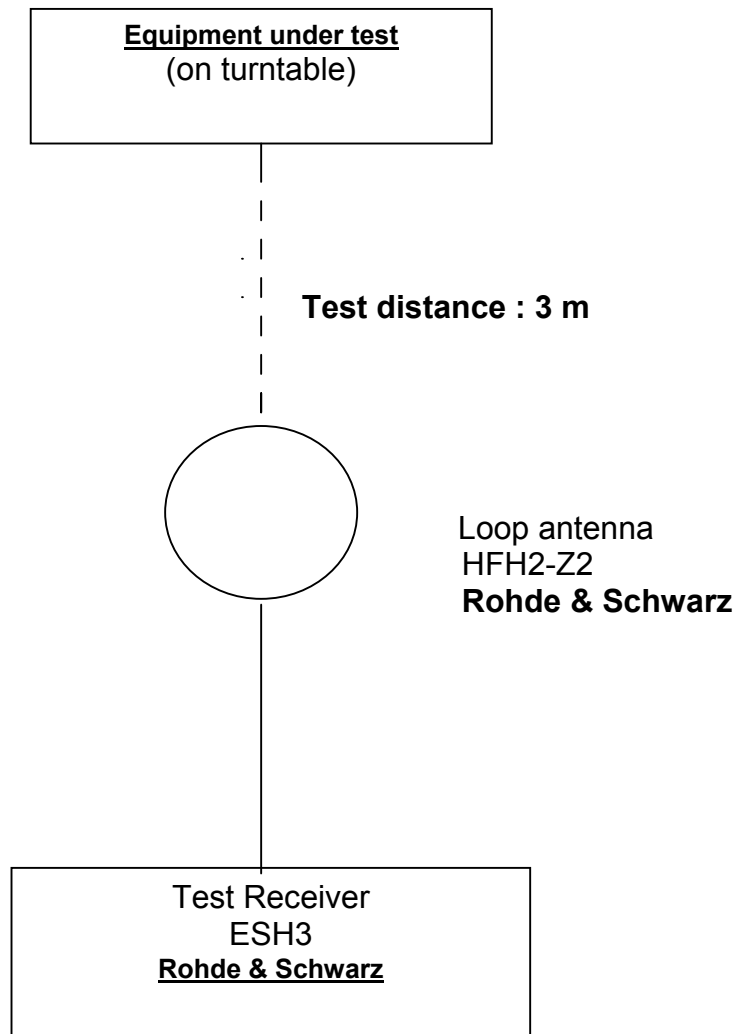

Interference Radiation

Date: 2004-08-11

Page: 9 of 14

Measurement of Radiated Emissions (30MHz-1000MHz)

Acc: FCC Part 15 Subpart C

IECC Ref: 39183A/4/400F
 Model: 718001
 Applicant: ARTIN INDUSTRIAL CO LTD
 Sample No.: 1
 Set under test: 49MHz Remote Control Transmitter
 Connected sets: -
 Operating mode: Power "On"

Test Equipment
 Receiver: ESVP Rohde & Schwarz
 Antenna: Schwarzbeck BBA 9106
 and UHALP 9107

	Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result dB(μ V/m)	Vert. Test Result dB(μ V/m)	Limit dB(μ V/m)
Peak	49.86	57	64	11.7	68.7	75.7	100.0
Av. **	49.86	53	60	11.7	64.7	71.7	80.0
Harm. 2	99.72	< 16	< 16	10.3	< 27.3	< 26.3	43.5
Harm. 3	149.58	< 16	< 16	15.0	< 31.0	< 31.0	43.5
Harm. 4	199.44	< 16	< 16	16.5	< 32.5	< 32.5	43.5
Harm. 5	249.3	< 16	< 16	17.7	< 33.7	< 33.7	46.0
Harm. 6	299.16	< 16	< 16	20.0	< 36.0	< 36.0	46.0
Harm. 7	349.02	< 16	< 16	17.4	< 33.4	< 33.4	46.0
Harm. 8	398.88	< 16	< 16	18.3	< 34.3	< 34.3	46.0
Harm. 9	448.74	< 16	< 16	19.0	< 35.0	< 35.0	46.0
Harm. 10	498.6	< 16	< 16	19.7	< 35.7	< 35.7	46.0
Harm. 11	548.46	< 16	< 16	20.2	< 36.2	< 36.2	46.0
Harm. 12	598.32	< 16	< 16	20.9	< 36.9	< 36.9	46.0
Harm. 13	648.18	< 16	< 16	21.6	< 37.6	< 37.6	46.0
Harm. 14	698.04	< 16	< 16	22.4	< 38.4	< 38.4	46.0
Harm. 15	747.9	< 16	< 16	23.0	< 39.0	< 39.0	46.0
Harm. 16	797.76	< 16	< 16	23.7	< 39.7	< 39.7	46.0
Harm. 17	847.62	< 16	< 16	24.3	< 40.3	< 40.3	46.0
Harm. 18	897.48	< 16	< 16	25.0	< 41.0	< 41.0	46.0
Harm. 19	947.34	< 16	< 16	25.7	< 41.7	< 41.7	46.0

Remark: All frequencies in the required range have been scanned and only those significant and representative readings are reported above.
 All emissions not reported above are all well below the limit.

Note: 1. Unless otherwise indicated, the recorded readings are in quasi-peak values.

2. ** Calculation of radiation (average) :

Formula :

Duty cycle = (N1L1 + N2L2 + ... + Nn-1Ln-1 + NnLn) / 100 or T
 where N1 is number of type 1 pulse, L1 is length of type 1 pulse, etc.
 T is the period of the pulse train (if less than 100 ms)

According to the time domain plots shown in page 10 & 11 :

Duty cycle of the EUT = (4x2.32 + 10x0.72) / 26.3 = 0.63

Av correction factor = 20 x log(0.63) dB

= - 4 dB

Radiation (average) = Radiation (peak) + Av correction factor

Radiation (average) of the EUT (Horizontal) = 57 - 4 dB(μV/m) = 53 dB(μV/m)

Radiation (average) of the EUT (Vertical) = 64 - 4 dB(μV/m) = 60 dB(μV/m)

FCC – Test Report


Date: 2004-08-11

No. 39183A/4/400F

Page 10 of 14

Interference Radiation

Transmitter Emission – Time Domain Plot

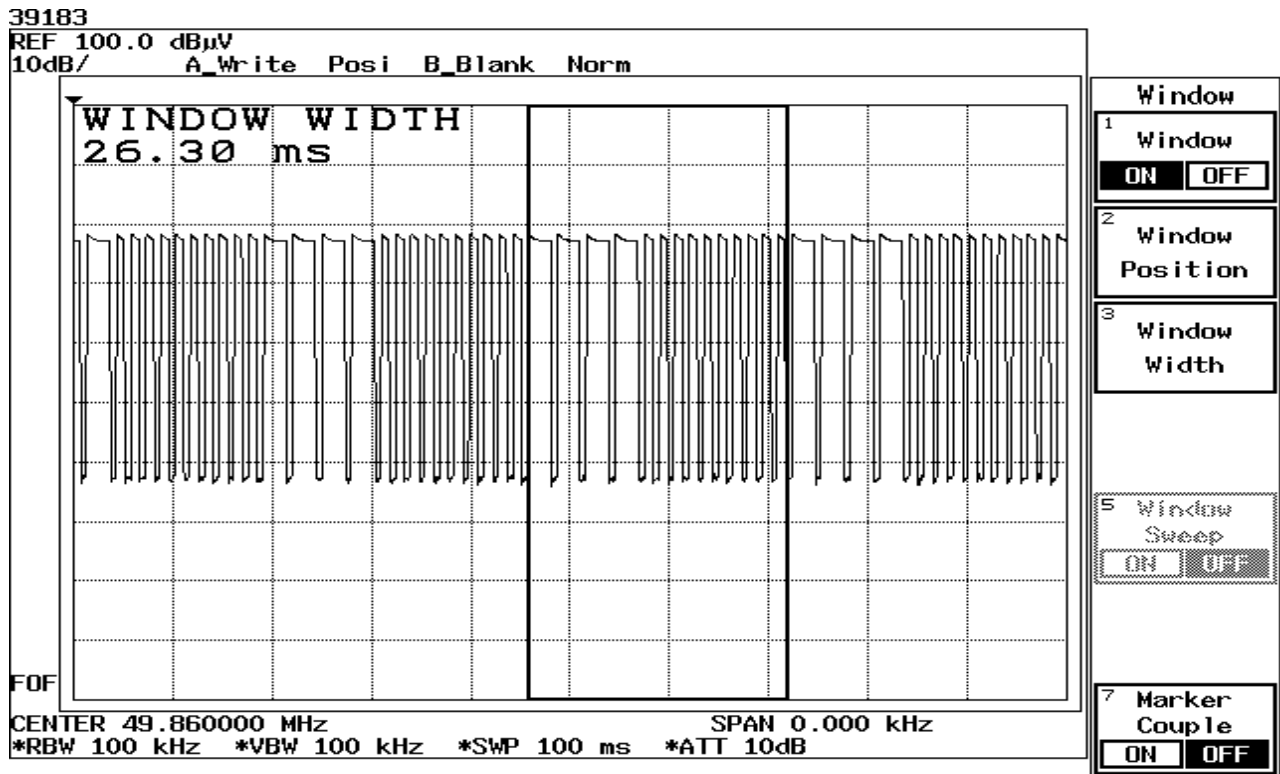

Pulse cycle period = 26.3 ms


FCC – Test Report

Date: 2004-08-11


No. 39183A/4/400F

Page 11 of 14

Transmitter Emission – Time Domain Plot

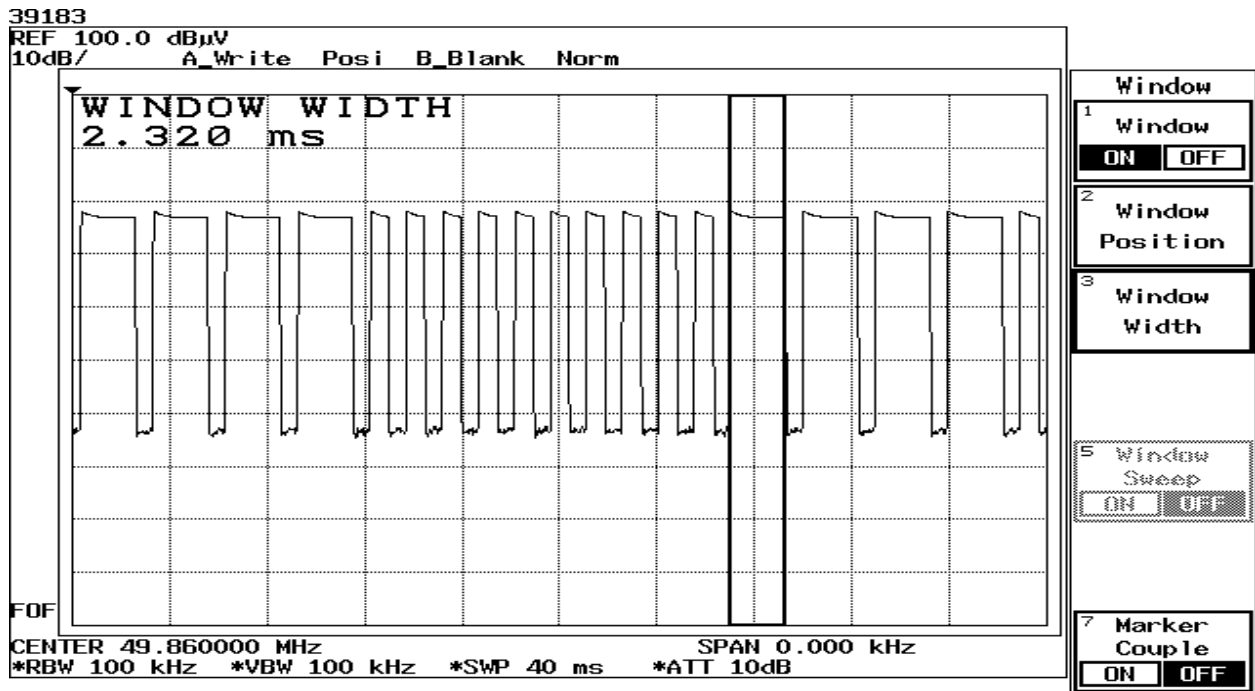

Pulse width = 2.32 ms (total number of pulse : 4)

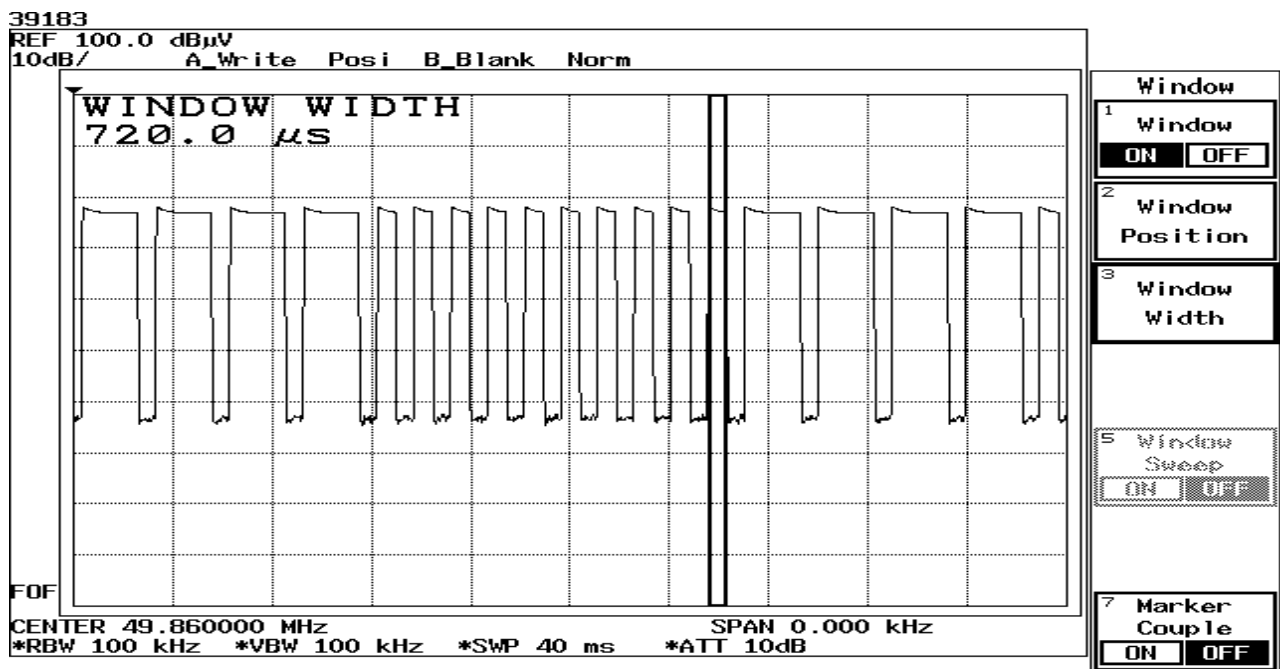

Pulse width = 0.72 ms (total number of pulse : 10)

FCC – Test Report

Date: 2004-08-11

No. 39183A/4/400F

Page 12 of 14

Notes for Radiation Measurement

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

In the frequency range above 1000 MHz Spectrum Analyzer FMSM26 and Analyzer Display Unit FSA-D are used, bandwidth set at 100 kHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

Loop antenna for the frequency range 9KHz – 30MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1 m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

In the frequency range above 1 GHz horn-antenna RGA 50/60 is used.

5. Frequency range scanned:

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions. To find the maximum emission (30MHz – 1000MHz), the antenna was raised from 1 to 4 meters and was stopped at the maximum emission point.

7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.


FCC – Test Report

Date: 2004-08-11

No. 39183A/4/400F

Page 13 of 14

Measurement Data of Emissions within Band Edges

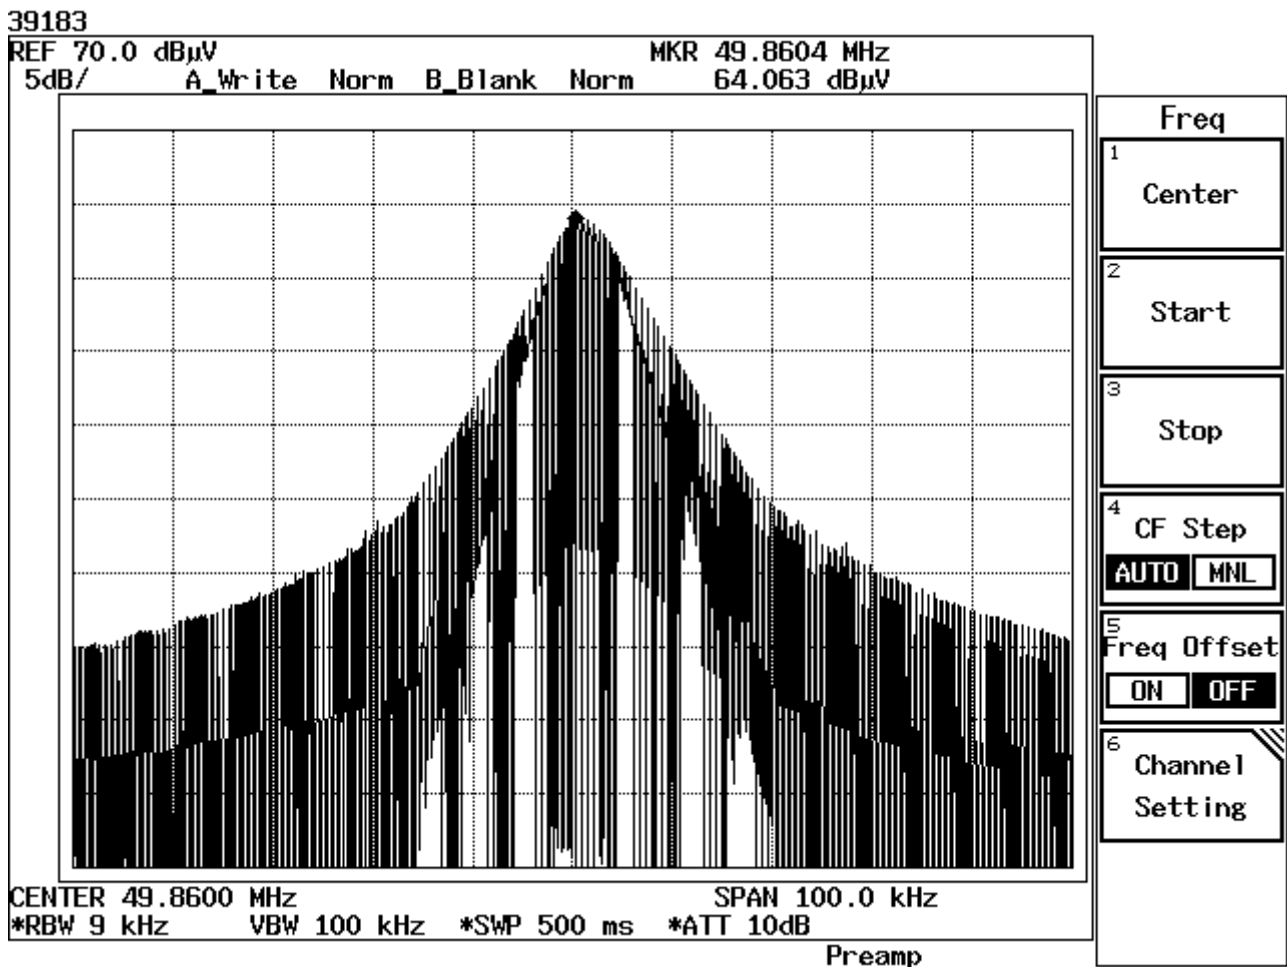

Result : The field strength of any emission within the operation band did not exceed 80 dB(μV/m) for average value or 100 dB(μV/m) for peak value. Refer to page 9 for the recorded value for the emission at the fundamental frequency.

FCC – Test Report

Date: 2004-08-11

No. 39183A/4/400F

Page 14 of 14

Notes for Measurement of Emissions within Band Edges

1. **Measurement facility:**
Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.
2. **Measuring instrumentations:**
Spectrum Analyzer: Advantest R3132
3. **Frequency range scanned:**
The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.
4. **Arrangement of EUT:**
During the test, the sample was operated.
5. **Measuring Procedure:**
In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.