

# MEASUREMENT REPORT


(FCC : Part 15 Subpart C (15.247) / ANSI C63.4-2003)




Testing Laboratory  
1288

Product.....: Wireless ADSL IAD  
Trade Name.....: COMTREND  
Model No.....: NexusLink 5700  
Applicant.....: COMTREND CORPORATION  
Applicant Address.....: 3F-1, 10 Lane 609, Chung Hsin Road,  
Taiwan 241

<b>Report Number</b>	MLT1009P15002
<b>Applicant</b>	COMTREND CORPORATION
<b>Product</b>	Wireless ADSL IAD
<b>Sample Received Date</b>	2010/09/24

<b>Report Prepared By</b>	Jesse Tien
<b>Signature</b>	
<b>Date Prepared</b>	2010/09/27 ~ 2010/10/15

<b>Report Authorized By</b>	Roger Chen
<b>Signature</b>	
<b>Date Authorized</b>	2010/10/20

Test By

**Max Light Technology Co., Ltd.**  
 Room 5, 8F, No.125, Section 3 Roosevelt Road,  
 Taipei, Taiwan., R.O.C.  
 Office : Tel: 886-2-2363-2447 Fax: 886-2-2363-2597  
 Lab. : Tel: 886-2-2663-3486 Fax: 886-2-2663-3582

It may be duplicated completely for legal use with the allowance of the applicant.  
 It shall not be reproduced except in full, without the written approval of our  
 laboratory.

## **Table of Contents :**

1. General .....	5.
2. Radiated Emissions Requirements .....	9.
3. Maximum Conducted Output Power Requirements .....	24.
4. Minimum 6dB RF Bandwidth Requirements .....	36.
5. Maximum Power Density Requirements .....	47.
6. Out of Band Conducted Emissions Requirements .....	52.
7. Band Edges Requirements .....	72.
8. Antenna Requirements .....	77.
Appendix I ( EUT Test Setup ) .....	78.
Appendix II (Brand / Trade Name & Model No. Multiple Listee ) .....	80.

## CERTIFICATION

We here by verify that :


The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-2003. All test were conducted by


MLT(Max Light Technology Co.,Ltd) Room 5, 8F, No.125, Section 3 Roosevelt Road, Taipei, Taiwan, R.O.C Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with Class B radiated and conducted emission limit of FCC Rules Part 15 Subpart C (15.247).

<b>Applicant Name</b>	COMTREND CORPORATION
<b>Applicant Address</b>	3F-1, 10 Lane 609, Chung Hsin Road, Section 5 San Chung City, Taipei Hsien, Taiwan 241
<b>Manufacturer Name</b>	COMTREND CORPORATION
<b>Manufacturer Address</b>	3F-1, 10 Lane 609, Chung Hsin Road, Section 5 San Chung City, Taipei Hsien, Taiwan 241

<b>Equipment</b>	Wireless ADSL IAD
<b>Model No</b>	NexusLink 5700
<b>FCC ID</b>	L9V5700

<b>Report Prepared By</b>	Jesse Tien
<b>Signature</b>	

<b>Report Authorized By</b>	Roger Chen
<b>Signature</b>	

# 1. GENERAL

## 1.1 Introduction

The following measurement report is submitted on behalf of COMTREND CORPORATION In support of a Class B Digital Device certification in accordance with Part2 Subpart J and Part 15 Subpart C of the Commission's and Regulations.

## 1.2 Customer Details

<b>Applicant Name</b>	COMTREND CORPORATION
<b>Applicant Address</b>	3F-1, 10 Lane 609, Chung Hsin Road, Section 5 San Chung City, Taipei Hsien, Taiwan 241
<b>Manufacturer Name</b>	COMTREND CORPORATION
<b>Manufacturer Address</b>	3F-1, 10 Lane 609, Chung Hsin Road, Section 5 San Chung City, Taipei Hsien, Taiwan 241

## 1.3 Technical data of EUT

<b>Equipment</b>	Wireless ADSL IAD
<b>Model No</b>	NexusLink 5700
<b>FCC ID</b>	L9V5700
<b>Power Type</b>	Powered By AC Adapter(Model : Au-7970u) Input : AC100~240V , 50/60Hz , 0.9A Output : DC12V , 2A
<b>Type of Modulation</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>Transfer rate</b>	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps 802.11n HT20: 130, 117, 104, 78, 52, 39, 26, 13Mbps 802.11n HT40: 270, 243, 216, 162, 108, 81, 54, 27Mbps
<b>Type of Antenna</b>	8241 Flying Lead Antenna & 2.4GHz PCB Antenna
<b>Frequency of Channel</b>	See Next page

During testing the EUT was operated at Tx or Rx mode for each emission measured. This was done in order to ensure that maximum emission levels were attained.

**802.11b & 802.11g & 802.11n HT20 Frequency of Each Channel (Working Frequency)**

Channel No.	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

**802.11n HT40 Frequency of Each Channel (Working Frequency)**

Channel No.	Frequency (MHz)
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452

**1.4 Summary Of Tests**


47 CFR Part 15 Subpart C			
Reference	Test	Results	Note
15.107	AC Power Conducted Emission	PASS	
15.247(c)	Transmitter Radiated Emissions	PASS	
15.247(b)	Max. Output Power	PASS	
15.247(a)(2)	6dB RF Bandwidth	PASS	
15.247(d)	Max. Power Density	PASS	
15.247(c)	Out of Band Conducted Spurious Emission	PASS	
15.247(c)	Band Edge Measurement	PASS	
15.203	Antenna Requirement	PASS	

## 1.5 Description of Support Equipment

In order to construct the minimum system which required by the ANSI C63.4-2003, following equipments were used as the support units.

Component	Manufacturer	Model No.	Serial No.	FCC ID
Monitor	IBM	6934-AC1	23-CB387	FCC DOC
Computer	HP	DX439AV	SGH5120HZM	FCC DOC
Keyboard	Dell	SK8110	MY-05N456-38843-2CV-0642	FCC DOC
Mouse	Logitech	M-SBF69	HCA55000265	FCC DOC
Printer	HP	C4562B	H946151BZ	B94C2164X
Modem	D-Link	DFM-560EL	ES0O25A000007	FCC DOC
Telephone	Marco Rona	8611M	000112	FCC DOC
Telephone	BELLSOUTH	8801X HAC VC	0322000066	FCC DOC

## 1.6 Configuration of System Under Test

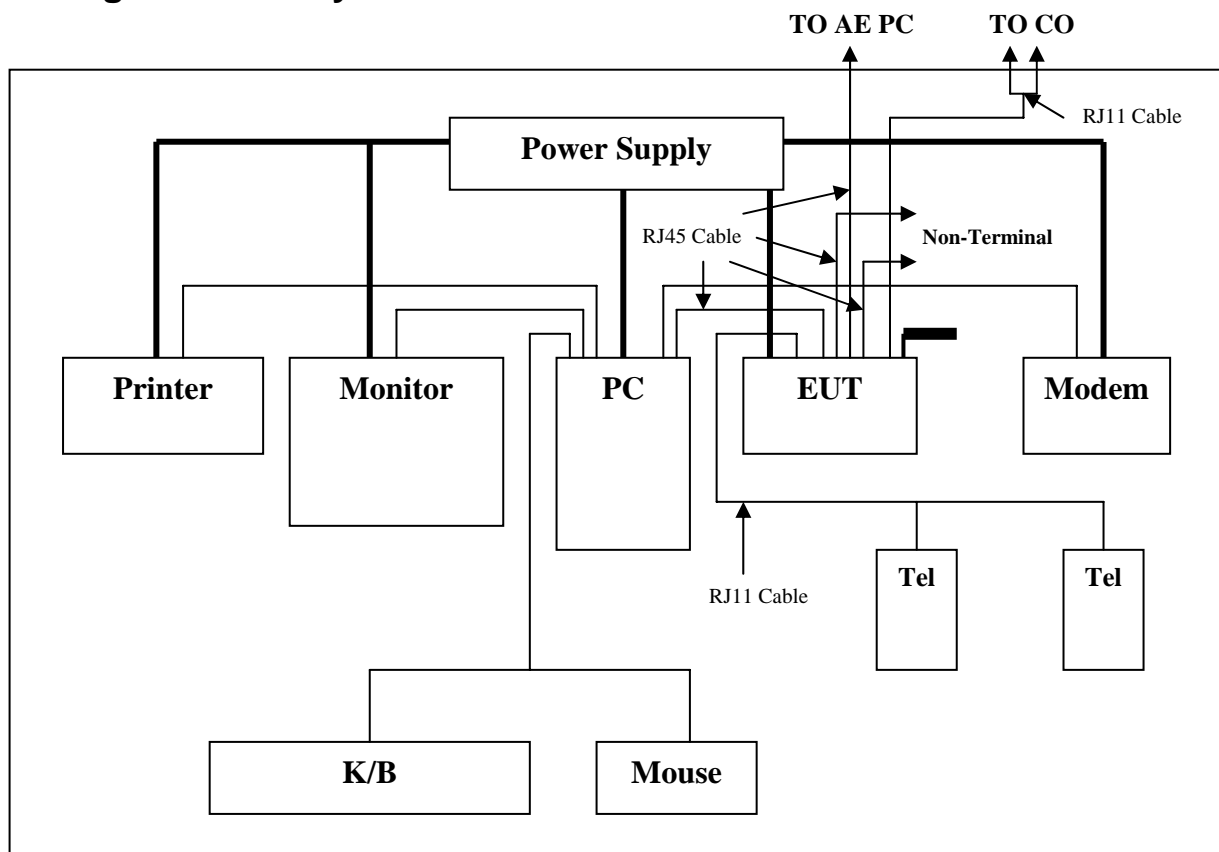

## **1.7 Test Procedure**

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-2003 followed KDB 558074 for this testing. "Measurement of un-Intentional Radiators."

## **1.8 General Test Condition**

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated. The system's radiated and conducted emissions were investigated while the computer alternately transferred data to the EUT as well as to the monitor and printer. Using a test program which sent a continuous data and transferred data to and from the EUT was proven to worst case emissions. The system's physical layout and cabling was randomly arranged to ensure that maximum emission levels were attained.



## 2. Radiated Emissions Requirements

### 2.1 General Configuration:

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which was 0.8 meters height, top surface 1.0 x 1.5 meter. During the test, EUT was set to transmit continuously & measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in microvolts pre meter(uV/m). The actual field intensity in decibels referenced to 1 microvolt in to field intensity in microvolts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$\text{Amplitude (dBuV/m)} = \text{FI(dBuV)} + \text{AF(dBm)} + \text{CL(dBuV)} - \text{Gain(dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(1) For fundamental frequency : Transmitter Output < +30dBm

(2) For spurious frequency : Spurious emission limits = fundamental emission limit /10

## 2.2 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cali. Date
1.	Agilent	Spectrum Analyzer	US44300422	E4446A	2010/05/28	2011/05/28
2.	TA	Pre Amplifier	RF01	0.10~19.1GHz 60dBm	2010/08/26	2011/08/26
3.	Herotek	Pre Amplifier	306090	A 402-417	2010/09/18	2011/09/18
4.	MLT	Pre Amplifier	TA010-190-30	RF03	2010/07/24	2011/07/24
5.	SCHWARZBECK	Horn Antenna	181	BBHA 9170	2010/10/04	2011/10/04
6.	SCHWARZBECK	Horn Antenna	304	BBHA 9120 D	2010/09/20	2011/09/20

### 2.3 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

### 2.4 Radiated Emissions Limits:

Frequency range (MHz)	Peak(dBuV/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

## 2.5 Measurement Data Of Radiated Emissions:

### 2.5.1 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Test Mode : 802.11b (CH01)

Radiated Emissions (HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	44.46	PK	1	270	0	74.00	-29.54
2335.00	52.66	PK	1	190	0	74.00	-21.34
2449.00	51.64	PK	1	300	0	74.00	-22.36

Radiated Emissions (VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	51.94	PK	1	230	0	74.00	-22.06
2248.00	52.74	PK	1	140	0	74.00	-21.26
2329.00	62.95	PK	1	110	0	74.00	-11.05
2329.00	51.90	AV	1	110	0	54.00	-2.10
2488.00	56.93	PK	1	320	0	74.00	-17.07
2488.00	43.06	AV	1	320	0	54.00	-10.94
4812.00	47.28	PK	1	210	0	74.00	-26.72
7234.00	47.52	PK	1	260	0	74.00	-26.48

- Notes :**
1. Margin= Amplitude - Limits
  2. Distance of Measurement : 3 Meter
  3. Height of table for EUT placed: 0.8 Meter.
  4. ANT= Antenna height.
  5. Duty= Duty cycle correction factor.
  6. Amplitude= Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)
  7. The other emission levels were very low against the limit.

### 2.5.2 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11b (CH06)

Radiated Emissions (HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	44.67	PK	1	120	0	74.00	-29.33
2353.00	52.79	PK	1	350	0	74.00	-21.21
4854.00	40.75	PK	1	2200	0	74.00	-33.25

Radiated Emissions (VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	51.17	PK	1	140	0	74.00	-22.83
2275.00	55.11	PK	1	260	0	74.00	-18.89
2275.00	44.85	AV	1	260	0	54.00	-9.15
2353.00	61.54	PK	1	80	0	74.00	-12.46
2353.00	50.53	AV	1	80	0	54.00	-3.47
2515.00	59.03	PK	1	110	0	74.00	-14.97
2515.00	45.62	AV	1	110	0	54.00	-8.38
4854.00	43.56	PK	1	320	0	74.00	-30.44
7304.00	46.48	PK	1	250	0	74.00	-27.52
9740.00	47.39	PK	1	210	0	74.00	-26.61

**Notes :** 1. Margin = Amplitude - Limits

2. Distance of Measurement : 3 Meter

3. Height of table for EUT placed: 0.8 Meter.

4. ANT = Antenna height.

5. Duty = Duty cycle correction factor.

6. Amplitude = Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)

7. The other emission levels were very low against the limit.

### 2.5.3 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11b (CH11)

Radiated Emissions (HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
2380.00	54.43	PK	1	110	0	74.00	-19.57
2380.00	43.87	AV	1	110	0	54.00	-10.13
2545.00	50.96	PK	1	290	0	74.00	-23.04
15830.00	53.30	PK	1	240	0	74.00	-20.70
15830.00	48.98	AV	1	240	0	54.00	-5.02

Radiated Emissions (VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
2383.00	63.35	PK	1	340	0	74.00	-10.65
2383.00	52.70	AV	1	340	0	54.00	-1.30
2500.00	58.04	PK	1	130	0	74.00	-15.96
2500.00	46.66	AV	1	130	0	54.00	-7.34
2539.00	58.00	PK	1	210	0	74.00	-16.00
2539.00	45.03	AV	1	210	0	54.00	-8.97
4924.00	49.48	PK	1	170	0	74.00	-24.52
7374.00	46.61	PK	1	230	0	74.00	-27.39
9852.00	49.43	PK	1	310	0	74.00	-24.57

**Notes :** 1.Margin= Amplitude - Limits

2.Distance of Measurement : 3 Meter

3.Height of table for EUT placed: 0.8 Meter.

4.ANT= Antenna height.

5.Duty= Duty cycle correction factor.

6.Amplitude= Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)

7.The other emission levels were very low against the limit.

### 2.5.4 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11g (CH01)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
1279.00	45.01	PK	1	190	0	74.00	-28.99
2335.00	53.30	PK	1	240	0	74.00	-20.70

Radiated Emissions(VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
1279.00	51.52	PK	1	160	0	74.00	-22.48
2329.00	62.60	PK	1	110	0	74.00	-11.40
2329.00	48.31	AV	1	110	0	54.00	-5.69
2500.00	58.21	PK	1	300	0	74.00	-15.79
2500.00	44.28	AV	1	300	0	54.00	-9.72
4812.00	40.79	PK	1	260	0	74.00	-33.21
7234.00	44.19	PK	1	180	0	74.00	-29.81

- Notes :**
1. Margin = Amplitude - Limits
  2. Distance of Measurement : 3 Meter
  3. Height of table for EUT placed: 0.8 Meter.
  4. ANT = Antenna height.
  5. Duty = Duty cycle correction factor.
  6. Amplitude = Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)
  7. The other emission levels were very low against the limit.

### 2.5.5 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11g (CH06)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	45.23	PK	1	280	0	74.00	-28.77
2350.00	51.23	PK	1	210	0	74.00	-22.77
2524.00	50.69	PK	1	130	0	74.00	-23.31

Radiated Emissions (VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2350.00	61.38	PK	1	210	0	74.00	-12.62
2350.00	46.72	AV	1	210	0	54.00	-7.28
2518.00	59.33	PK	1	320	0	74.00	-14.67
2518.00	45.25	AV	1	320	0	54.00	-8.75
2599.00	54.51	PK	1	120	0	74.00	-19.49
2599.00	43.26	AV	1	120	0	54.00	-10.74
4854.00	40.04	PK	1	290	0	74.00	-33.96
7290.00	46.24	PK	1	330	0	74.00	-27.76

**Notes :** 1.Margin= Amplitude - Limits

2.Distance of Measurement : 3 Meter

3.Height of table for EUT placed: 0.8 Meter.

4.ANT= Antenna height.

5.Duty= Duty cycle correction factor.

6.Amplitude= Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)

7.The other emission levels were very low against the limit.



### 2.5.6 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11g (CH11)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	45.45	PK	1	250	0	74.00	-28.55
2383.00	52.27	PK	1	190	0	74.00	-21.73
2539.00	53.71	PK	1	260	0	74.00	-20.29
2539.00	42.74	AV	1	260	0	54.00	-11.26

Radiated Emissions(VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2383.00	60.79	PK	1	130	0	74.00	-13.21
2383.00	46.37	AV	1	130	0	54.00	-7.63
2548.00	62.31	PK	1	200	0	74.00	-11.69
2548.00	47.13	AV	1	200	0	54.00	-6.87
2620.00	54.05	PK	1	210	0	74.00	-19.95
2620.00	41.76	AV	1	210	0	54.00	-12.24
4924.00	42.91	PK	1	160	0	74.00	-31.09
7374.00	45.53	PK	1	310	0	74.00	-28.47

**Notes :** 1.Margin= Amplitude - Limits

2.Distance of Measurement : 3 Meter

3.Height of table for EUT placed: 0.8 Meter.

4.ANT= Antenna height.

5.Duty= Duty cycle correction factor.

6.Amplitude= Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)

7.The other emission levels were very low against the limit.

### 2.5.7 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11n HT20 (CH01)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	45.86	PK	1	250	0	74.00	-28.14
2335.00	50.73	PK	1	180	0	74.00	-23.27
4980.00	38.16	PK	1	100	0	74.00	-35.84

Radiated Emissions(VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	52.26	PK	1	140	0	74.00	-21.74
2323.00	60.26	PK	1	310	0	74.00	-13.74
2323.00	50.50	AV	1	310	0	54.00	-3.50
2494.00	54.71	PK	1	280	0	74.00	-19.29
2494.00	46.48	AV	1	280	0	54.00	-7.52
4812.00	40.64	PK	1	130	0	74.00	-33.36
7234.00	45.06	PK	1	210	0	74.00	-28.94

- Notes :**
1. Margin = Amplitude - Limits
  2. Distance of Measurement : 3 Meter
  3. Height of table for EUT placed: 0.8 Meter.
  4. ANT = Antenna height.
  5. Duty = Duty cycle correction factor.
  6. Amplitude = Reading Amplitude – Amplifier gain + Cable loss + Antenna factor (Auto calculate in spectrum analyzer)
  7. The other emission levels were very low against the limit.

### 2.5.8 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11n HT20 (CH06)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
1279.00	45.91	PK	1	270	0	74.00	-28.09
2350.00	50.14	PK	1	300	0	74.00	-23.86

Radiated Emissions (VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
1279.00	52.83	PK	1	310	0	74.00	-21.17
2353.00	58.75	PK	1	160	0	74.00	-15.25
2353.00	48.96	AV	1	160	0	54.00	-5.04
2509.00	56.99	PK	1	230	0	74.00	-17.01
2509.00	46.19	AV	1	230	0	54.00	-7.81
4882.00	39.52	PK	1	130	0	74.00	-34.48
7304.00	46.83	PK	1	210	0	74.00	-27.17

- Notes :**
1. Margin= Amplitude - Limits
  2. Distance of Measurement : 3 Meter
  3. Height of table for EUT placed: 0.8 Meter.
  4. ANT= Antenna height.
  5. Duty= Duty cycle correction factor.
  6. Amplitude= Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)
  7. The other emission levels were very low against the limit.

### 2.5.9 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11n HT20 (CH11)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	45.37	PK	1	100	0	74.00	-28.63
2383.00	51.06	PK	1	280	0	74.00	-22.94
2545.00	52.02	PK	1	50	0	74.00	-21.98

Radiated Emissions(VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	52.36	PK	1	140	0	74.00	-21.64
2389.00	59.14	PK	1	60	0	74.00	-14.86
2389.00	49.38	AV	1	60	0	54.00	-4.62
2545.00	59.80	PK	1	320	0	74.00	-14.20
2545.00	50.64	AV	1	320	0	54.00	-3.36
4924.00	43.48	PK	1	110	0	74.00	-30.52
7374.00	46.74	PK	1	290	0	74.00	-27.26

**Notes :** 1.Margin= Amplitude - Limits

2.Distance of Measurement : 3 Meter

3.Height of table for EUT placed: 0.8 Meter.

4.ANT= Antenna height.

5.Duty= Duty cycle correction factor.

6.Amplitude= Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)

7.The other emission levels were very low against the limit.

### 2.5.10 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11n HT40 (CH03)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	46.55	PK	1	300	0	74.00	-27.45

Radiated Emissions(VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	52.74	PK	1	120	0	74.00	-21.26
7514.00	42.87	PK	1	230	0	74.00	-31.13

- Notes :**
1. Margin= Amplitude - Limits
  2. Distance of Measurement : 3 Meter
  3. Height of table for EUT placed: 0.8 Meter.
  4. ANT= Antenna height.
  5. Duty= Duty cycle correction factor.
  6. Amplitude= Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)
  7. The other emission levels were very low against the limit.

### 2.5.11 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11n HT40 (CH06)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	46.15	PK	1	260	0	74.00	-27.85
12372.00	46.98	PK	1	300	0	74.00	-27.02

Radiated Emissions (VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)		Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
1279.00	52.89	PK	1	310	0	74.00	-21.11
9152.00	46.20	PK	1	30	0	74.00	-27.80

- Notes :**
1. Margin = Amplitude - Limits
  2. Distance of Measurement : 3 Meter
  3. Height of table for EUT placed: 0.8 Meter.
  4. ANT = Antenna height.
  5. Duty = Duty cycle correction factor.
  6. Amplitude = Reading Amplitude – Amplifier gain + Cable loss + Antenna factor  
(Auto calculate in spectrum analyzer)
  7. The other emission levels were very low against the limit.

### 2.5.12 Open Field Radiated Emissions (Subpart C)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : 802.11n HT40 (CH09)

Radiated Emissions(HORIZONTAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
1279.00	45.42	PK	1	120	0	74.00	-28.58

Radiated Emissions(VERTICAL)							
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)	
1279.00	52.92	PK	1	210	0	74.00	-21.08

- Notes :**
1. Margin = Amplitude - Limits
  2. Distance of Measurement : 3 Meter
  3. Height of table for EUT placed: 0.8 Meter.
  4. ANT = Antenna height.
  5. Duty = Duty cycle correction factor.
  6. Amplitude = Reading Amplitude – Amplifier gain + Cable loss + Antenna factor (Auto calculate in spectrum analyzer)
  7. The other emission levels were very low against the limit.

### 3. Maximum Conducted Output Power Requirements

#### 3.1 Test Condition & Setup :


The tests below are run with the EUT's transmitter set at high power in TDD mode. A RJ-45 port from a computer to the EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to spectrum analyzer. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the spectrum Analyzer, for prevent the spectrum analyzer input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode .

For antennas with gains of 6 dBi or less , maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to  $(\text{GAIN} - 6)/3$  dBm.

The antenna port of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

#### 3.2 Test Instruments Configuration:

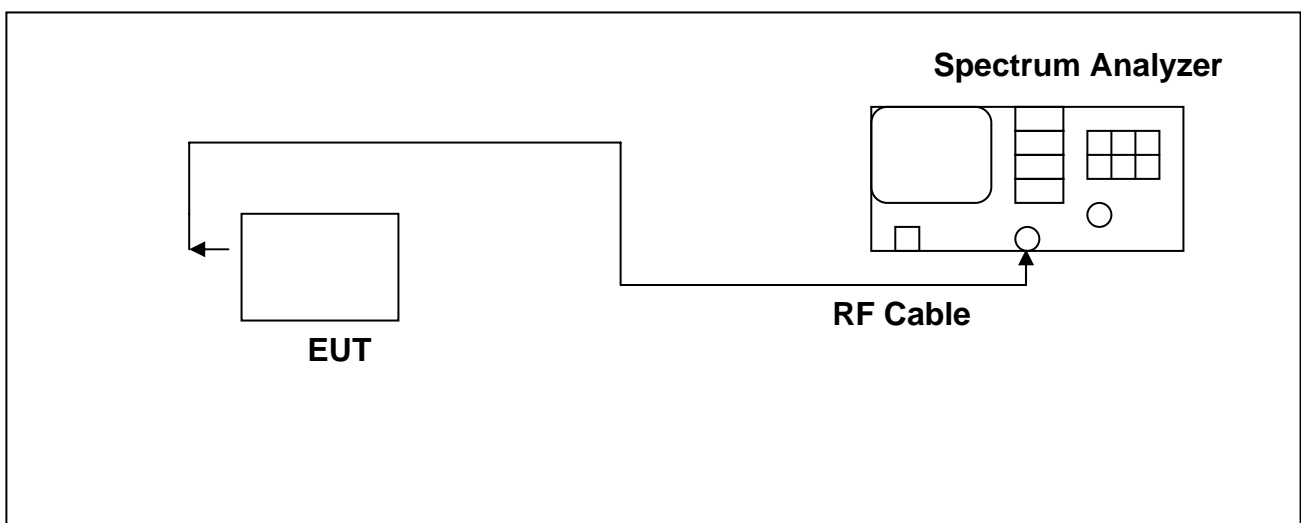



### 3.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cali. Date
1.	Agilent	Spectrum Analyzer	US39240419	E4407B	2010/02/02	2011/02/02

### 3.4 Test Result:

#### 802.11b

Frequency (MHz)	Data Rate(Mbps)	Output(dBm)	Required Limit
2412	11	24.86	<30dBm
2412	5.5	24.69	<30dBm
2412	2	24.74	<30dBm
2412	1	24.58	<30dBm

Frequency (MHz)	Data Rate(Mbps)	Output(dBm)	Required Limit
2412	11	24.86	<30dBm
2437	5.5	24.53	<30dBm
2462	11	24.61	<30dBm

#### 802.11g

Frequency (MHz)	Data Rate(Mbps)	Output(dBm)	Required Limit
2412	54	22.47	<30dBm
2412	48	22.29	<30dBm
2412	36	22.51	<30dBm
2412	24	22.43	<30dBm
2412	18	21.85	<30dBm
2412	12	22.09	<30dBm
2412	9	22.38	<30dBm
2412	6	22.46	<30dBm

Frequency (MHz)	Data Rate(Mbps)	Output(dBm)	Required Limit
2412	36	22.51	<30dBm
2437	54	22.02	<30dBm
2462	48	22.51	<30dBm

**Note :** 1.Test Graphs See next page.

2.Test result is the worst case of the different data rate.

**802.11n HT20**

Frequency (MHz)	Data Rate(Mbps)		Output Power(dBm)		Required Limit
	Ant 1	Ant 2	Ant 1	Ant 2	
2412	130	130	21.89	22.96	<30dBm
2412	117	117	21.95	22.70	<30dBm
2412	104	104	22.01	22.35	<30dBm
2412	78	78	21.69	22.68	<30dBm
2412	52	52	21.93	22.84	<30dBm
2412	39	39	21.88	22.57	<30dBm
2412	26	26	21.74	22.73	<30dBm
2412	13	13	21.91	22.90	<30dBm

Frequency (MHz)	Data Rate(Mbps)		Output Power(dBm)		Total Output Power(dBm)	Required Limit
	Ant 1	Ant 2	Ant 1	Ant 2		
2412	104	130	22.01	22.96	25.52	<30dBm
2437	130	78	22.51	23.19	25.87	<30dBm
2462	117	104	21.73	23.31	25.60	<30dBm

**802.11n HT40**


Frequency (MHz)	Data Rate(Mbps)		Output Power(dBm)		Required Limit
	Ant 1	Ant 2	Ant 1	Ant 2	
2412	270	270	20.32	20.11	<30dBm
2412	243	243	20.45	20.26	<30dBm
2412	216	216	20.51	20.19	<30dBm
2412	162	162	20.64	20.05	<30dBm
2412	108	108	20.19	20.07	<30dBm
2412	81	81	20.49	19.97	<30dBm
2412	54	54	20.53	20.21	<30dBm
2412	27	27	20.37	20.24	<30dBm

Frequency (MHz)	Data Rate(Mbps)		Output Power(dBm)		Total Output Power(dBm)	Required Limit
	Ant 1	Ant 2	Ant 1	Ant 2		
2422	162	243	20.64	20.26	23.46	<30dBm
2437	270	270	20.18	20.20	23.20	<30dBm
2452	216	270	20.43	20.67	23.56	<30dBm


**Note :** 1.Test Graphs See next page.

2.Test result is the worst case of the different data rate.


802.11b (2412MHz)

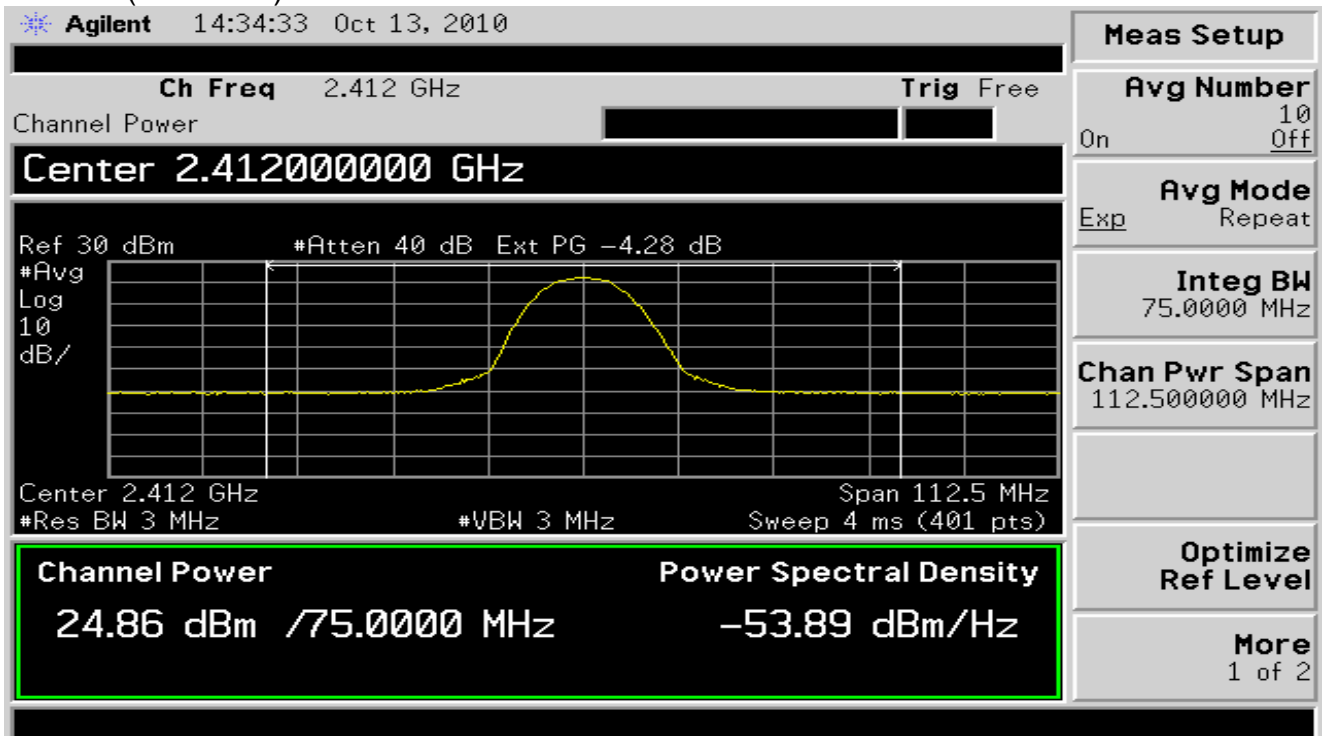


802.11b (2437MHz)

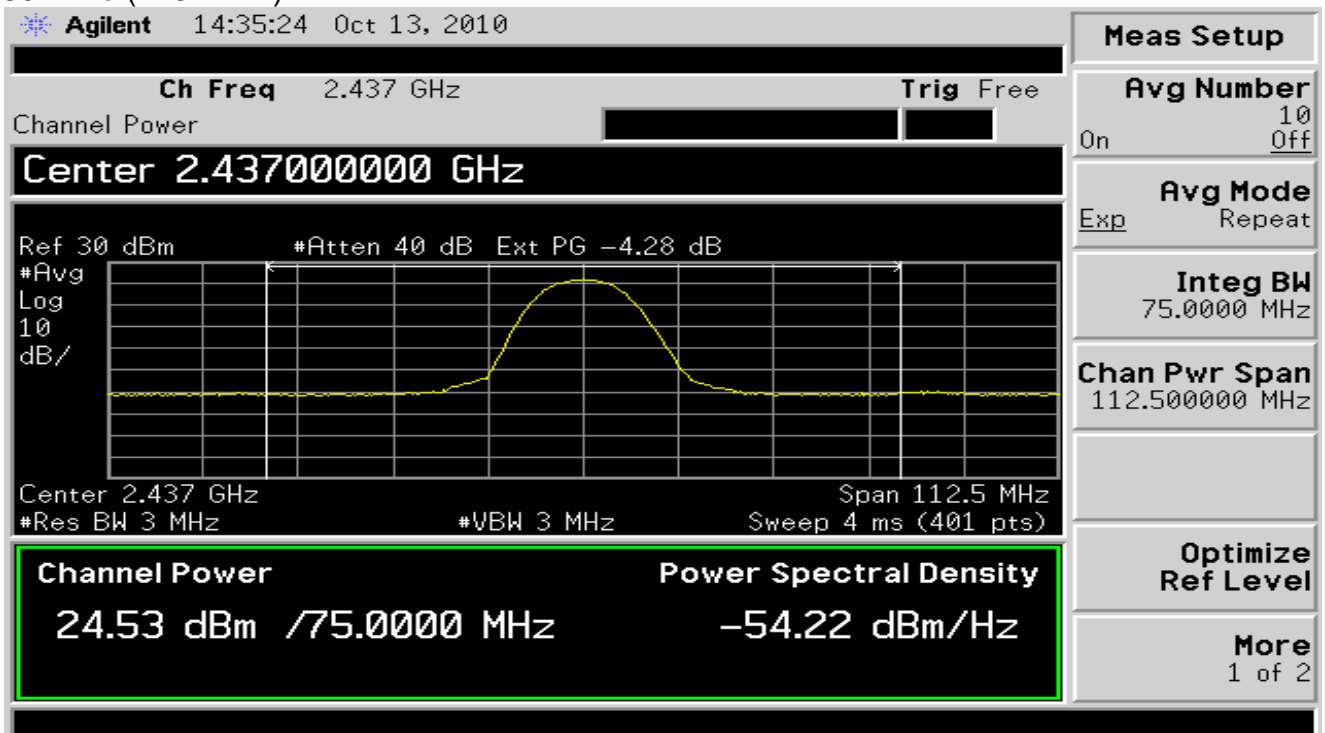


802.11b (2462MHz)

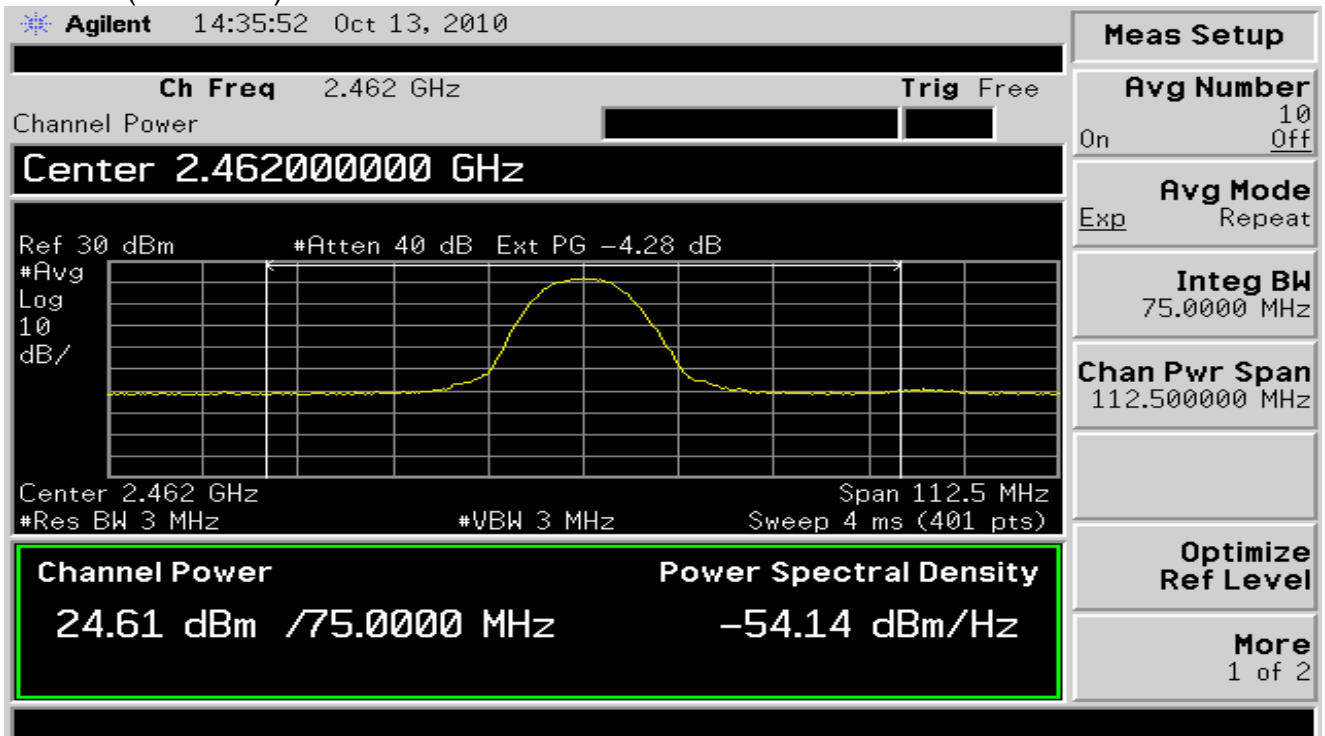


802.11g (2412MHz)

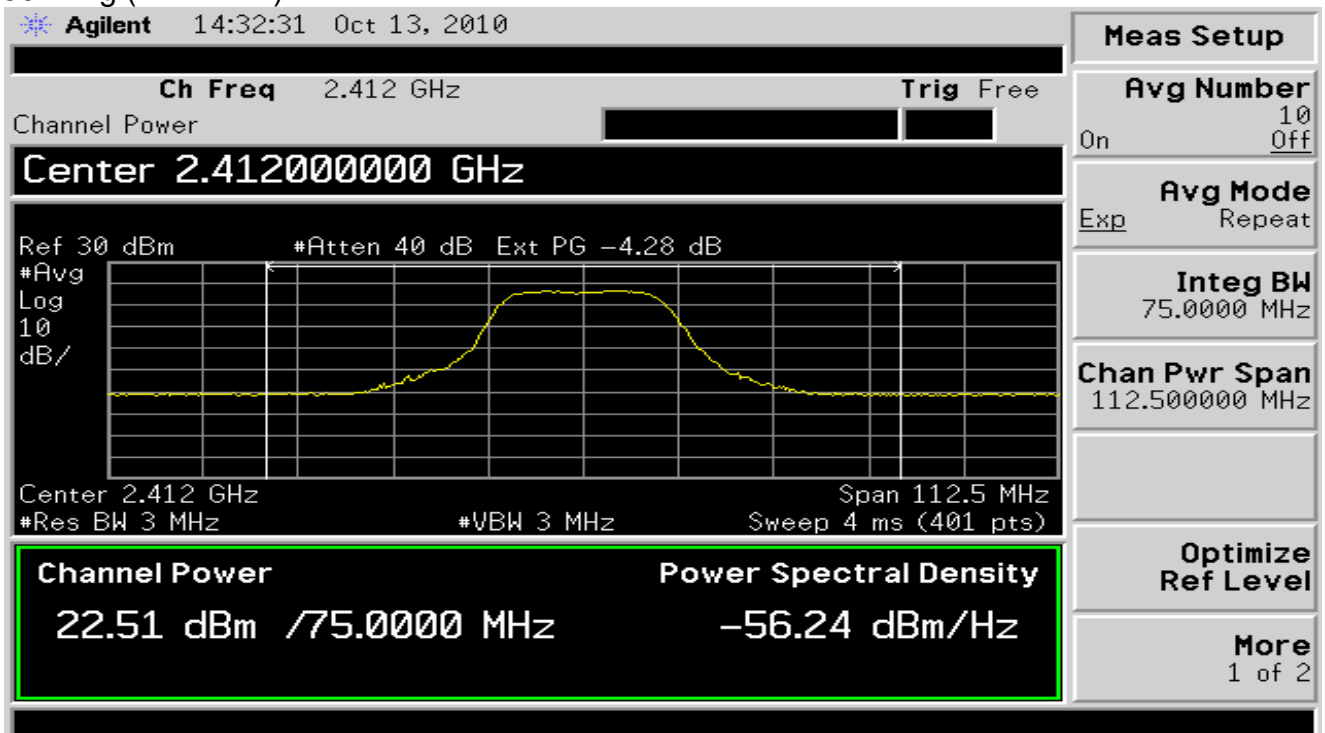


802.11g (2437MHz)

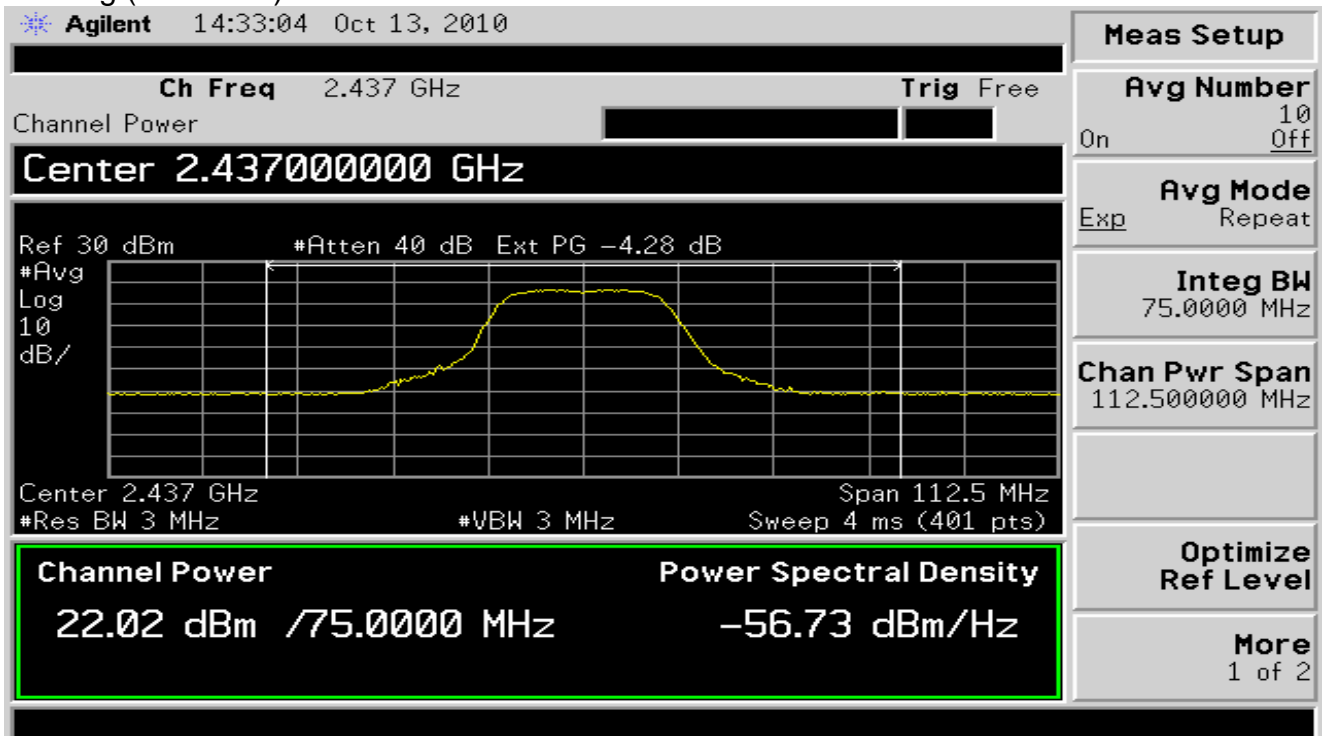


802.11g (2462MHz)

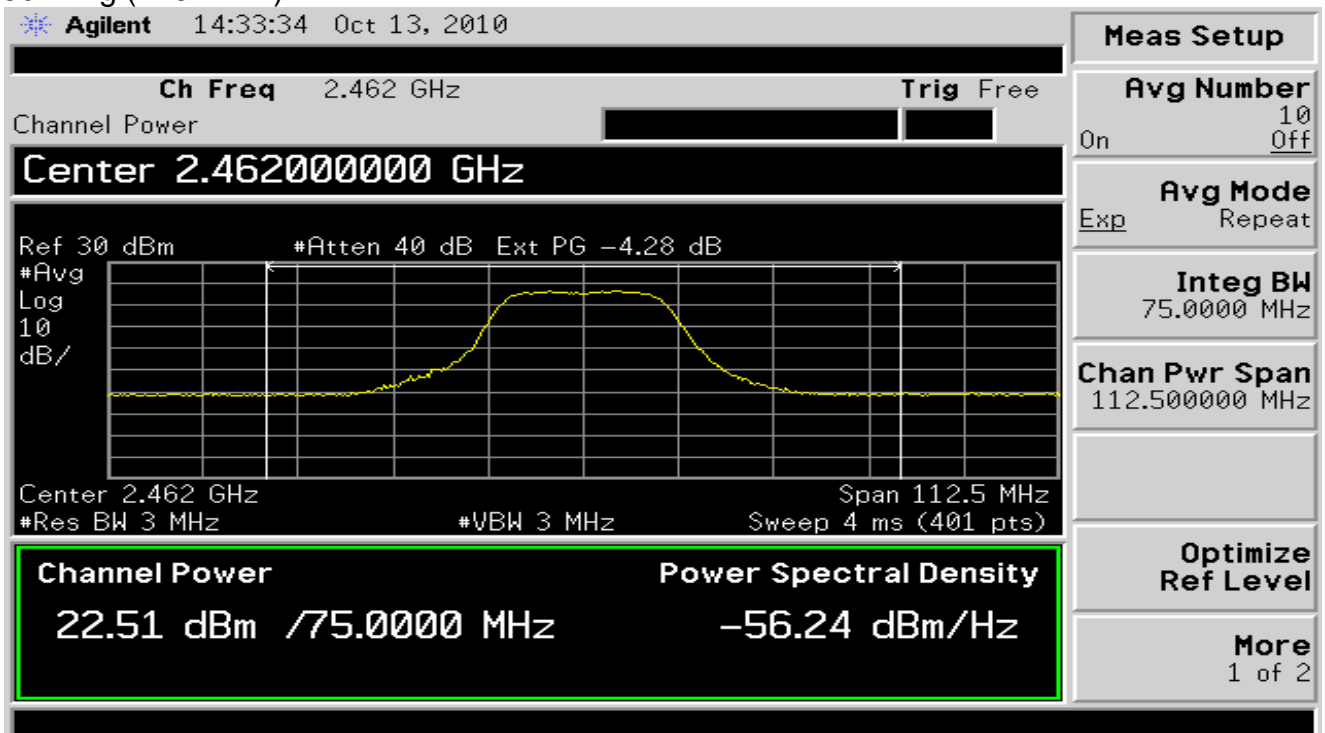


802.11n HT20(Ant 1)(2412MHz)

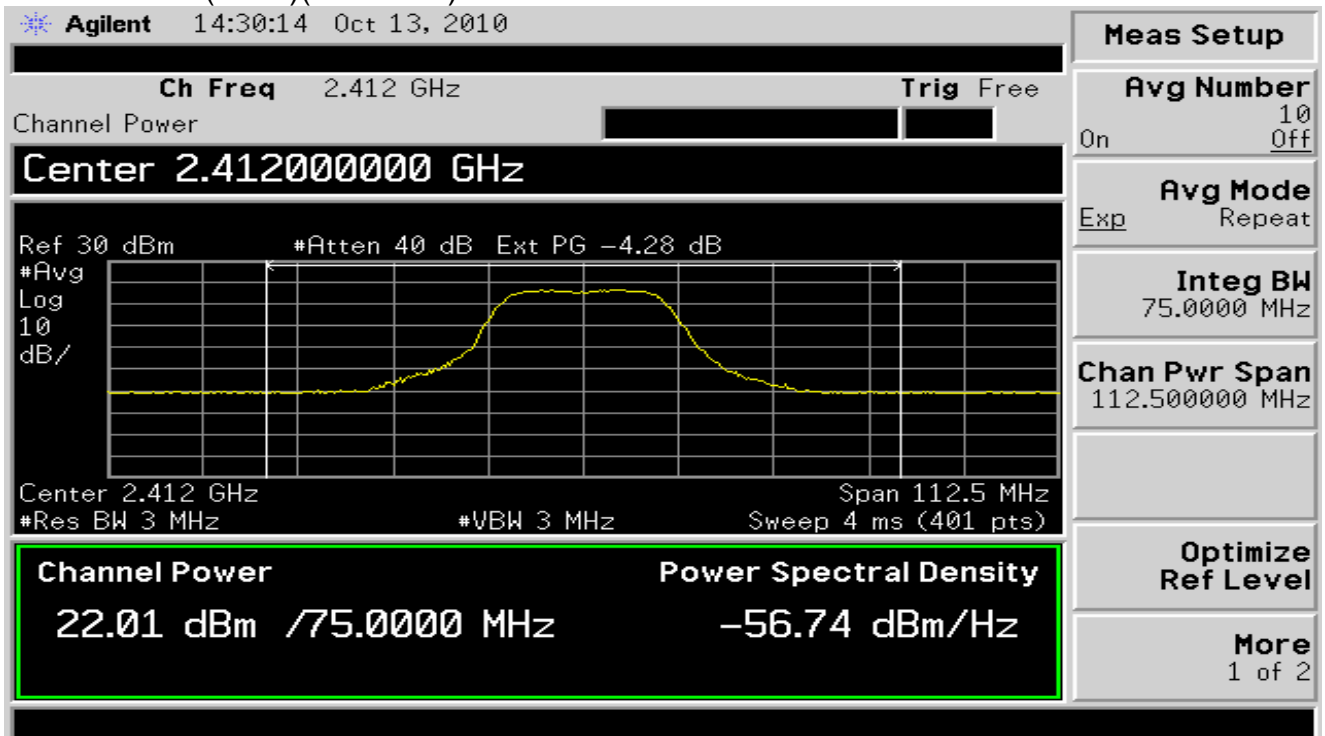


802.11n HT20(Ant 1) (2437MHz)

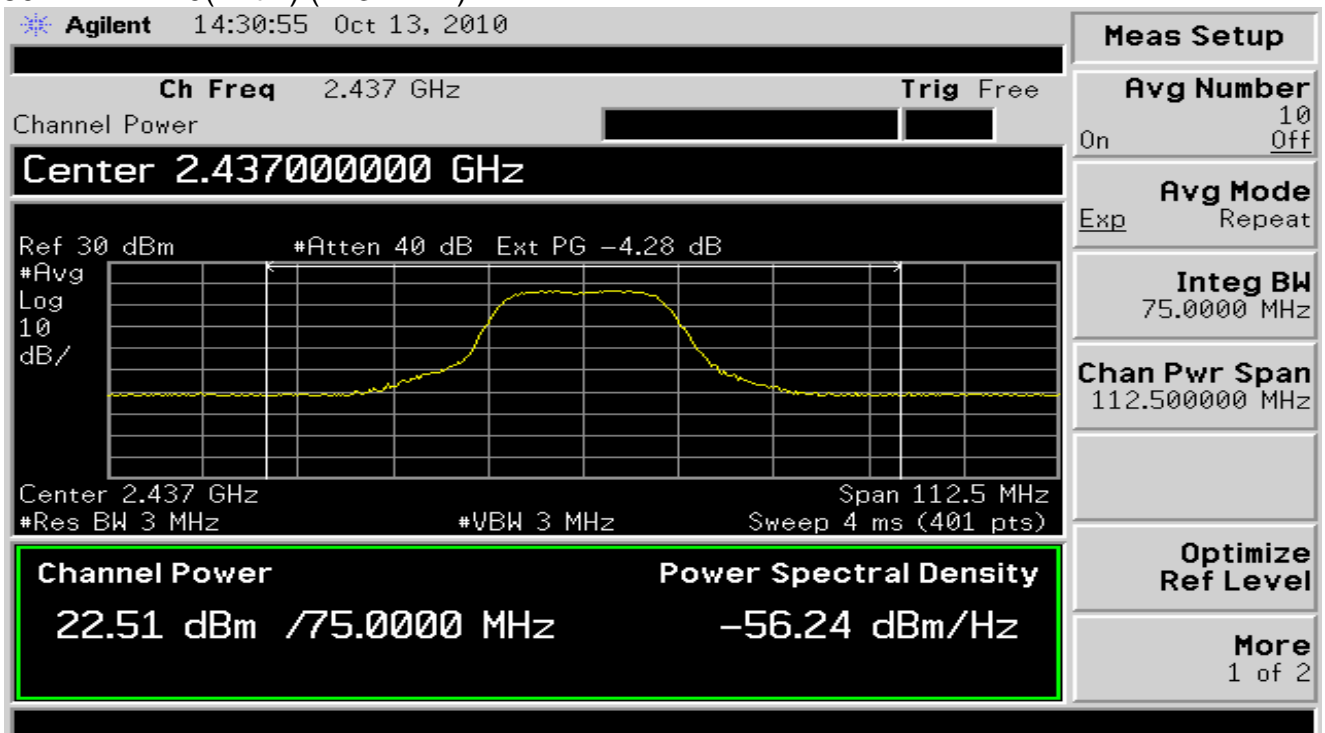


802.11n HT20(Ant 1) (2462MHz)

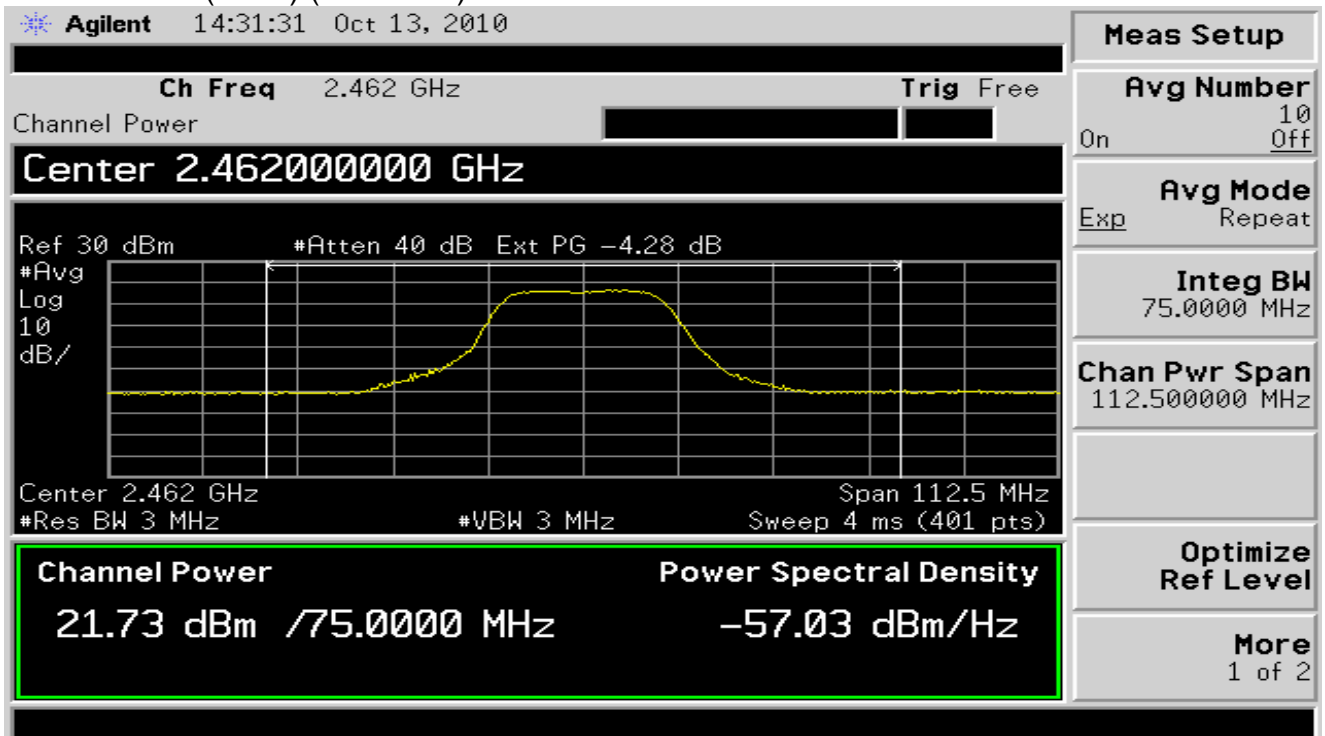


802.11n HT40(Ant 1)(2422MHz)

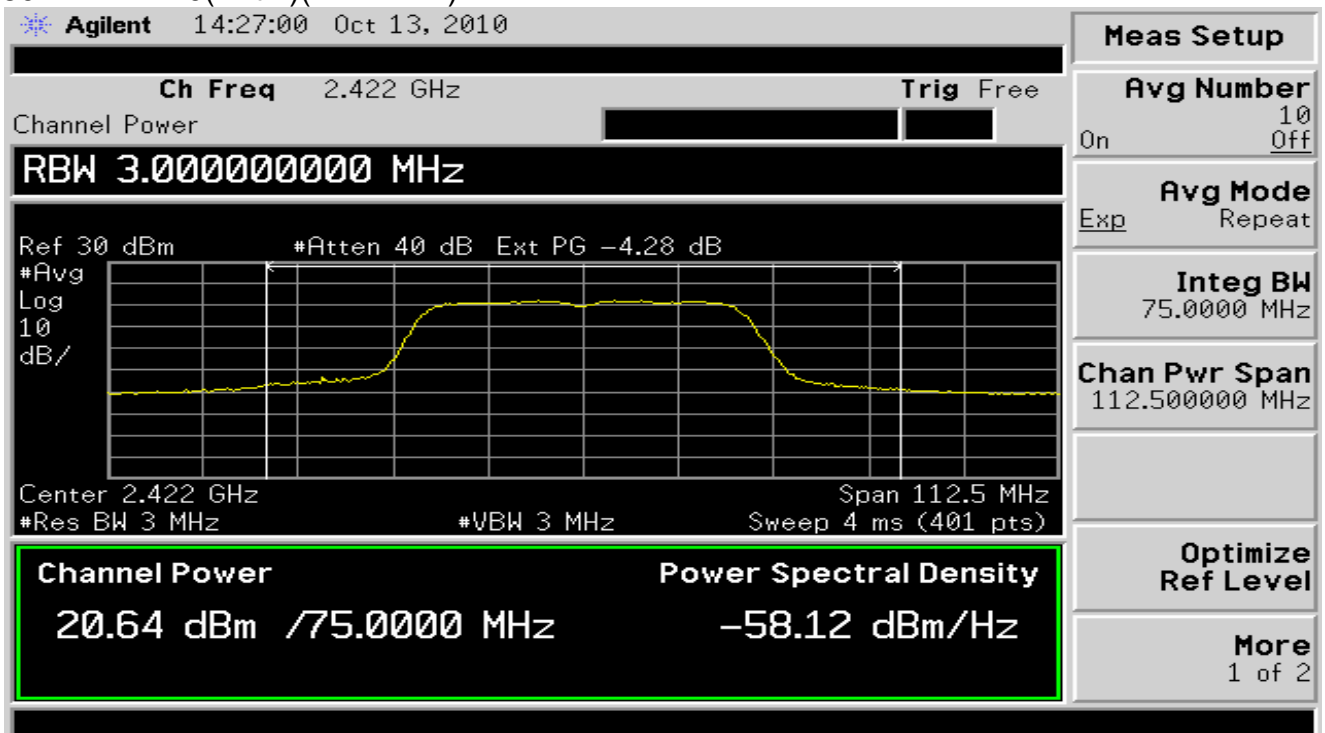

802.11n HT40(Ant 1)(2437MHz)

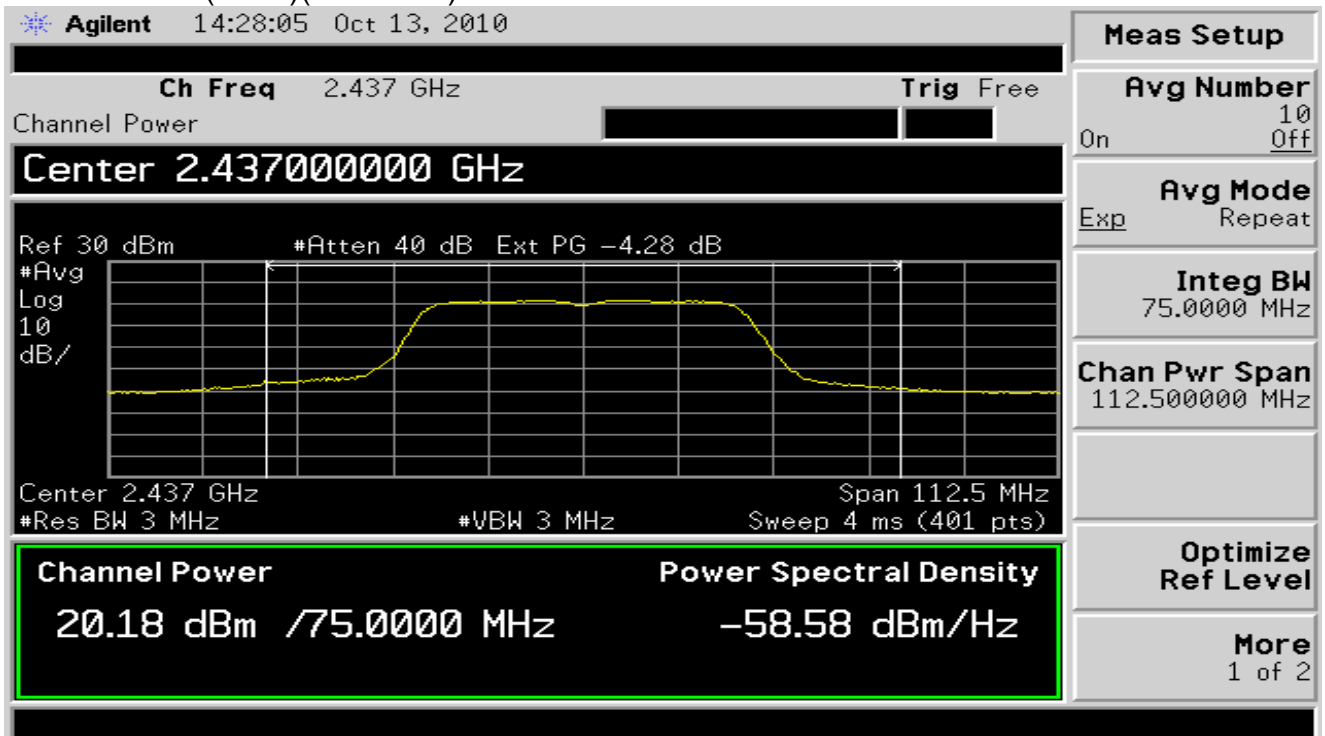


802.11n HT40(Ant 1)(2452MHz)

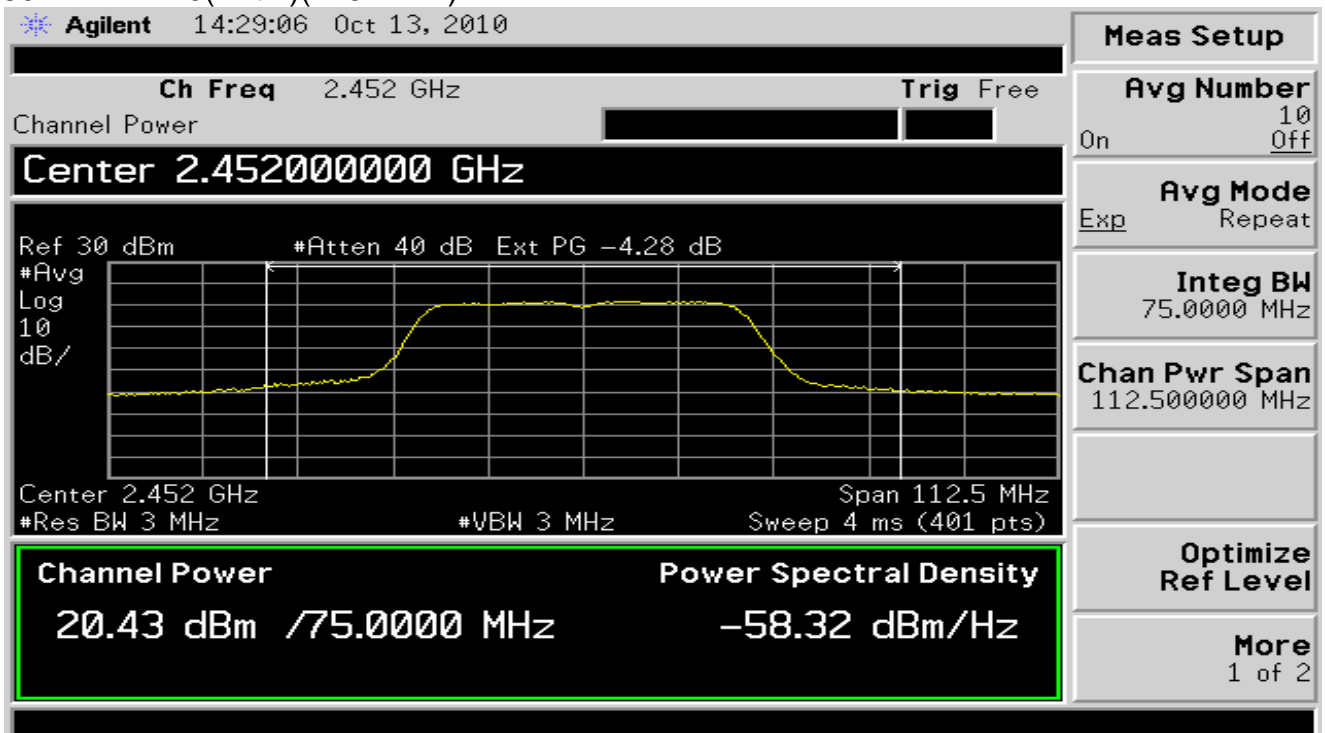





802.11n HT20(Ant 2)(2412MHz)

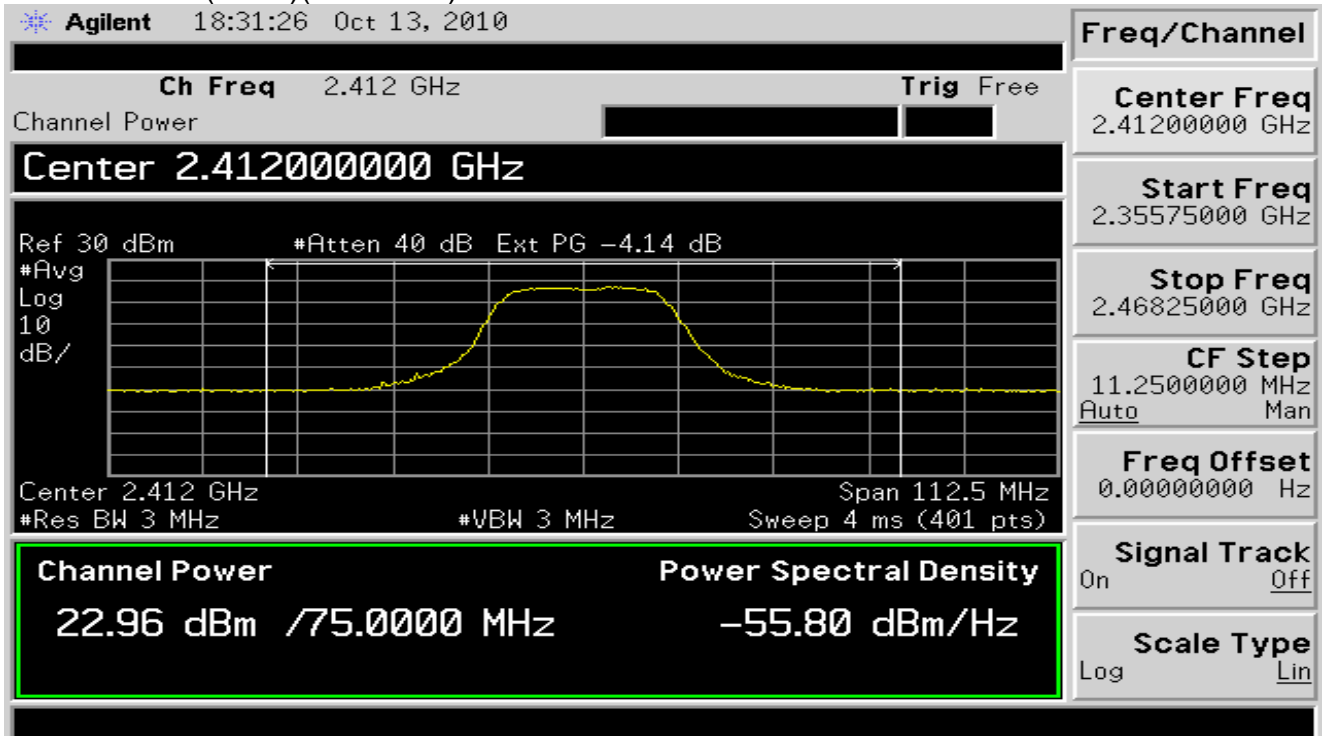


802.11n HT20(Ant 2) (2437MHz)

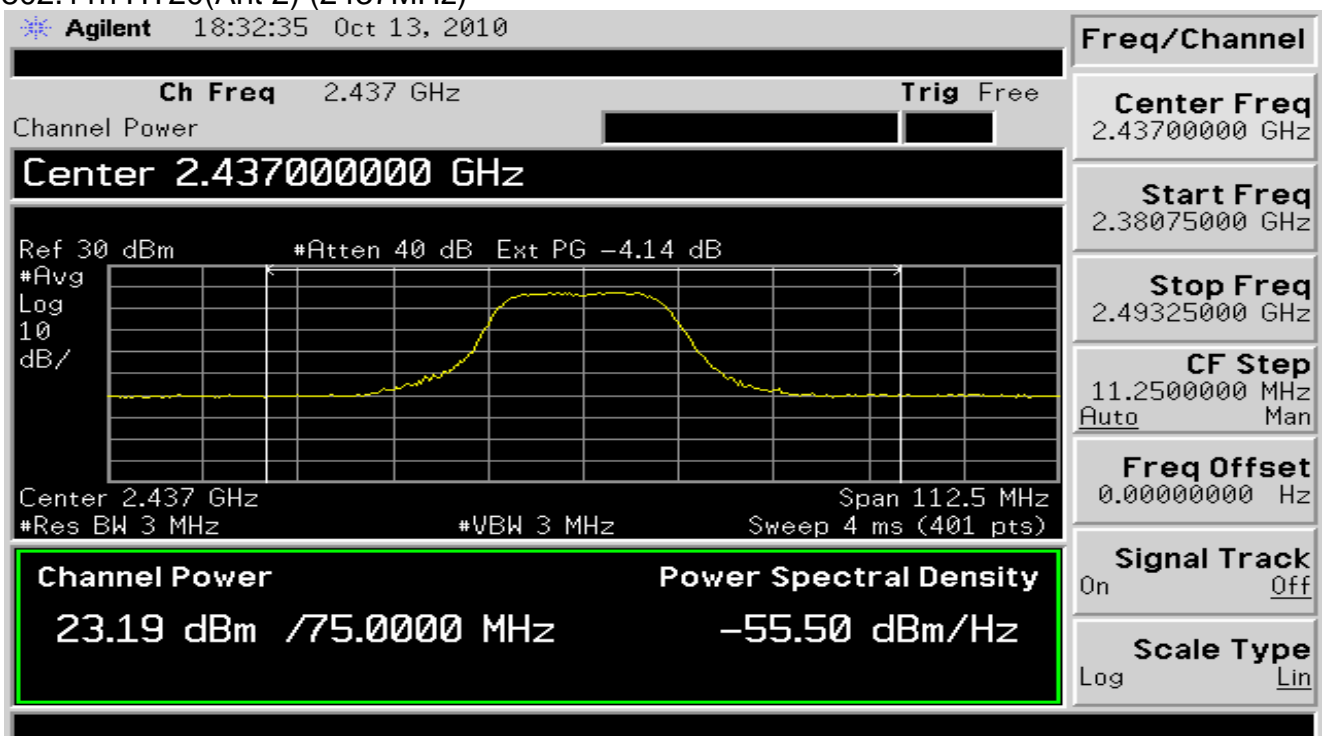


802.11n HT20(Ant 2)(2462MHz)

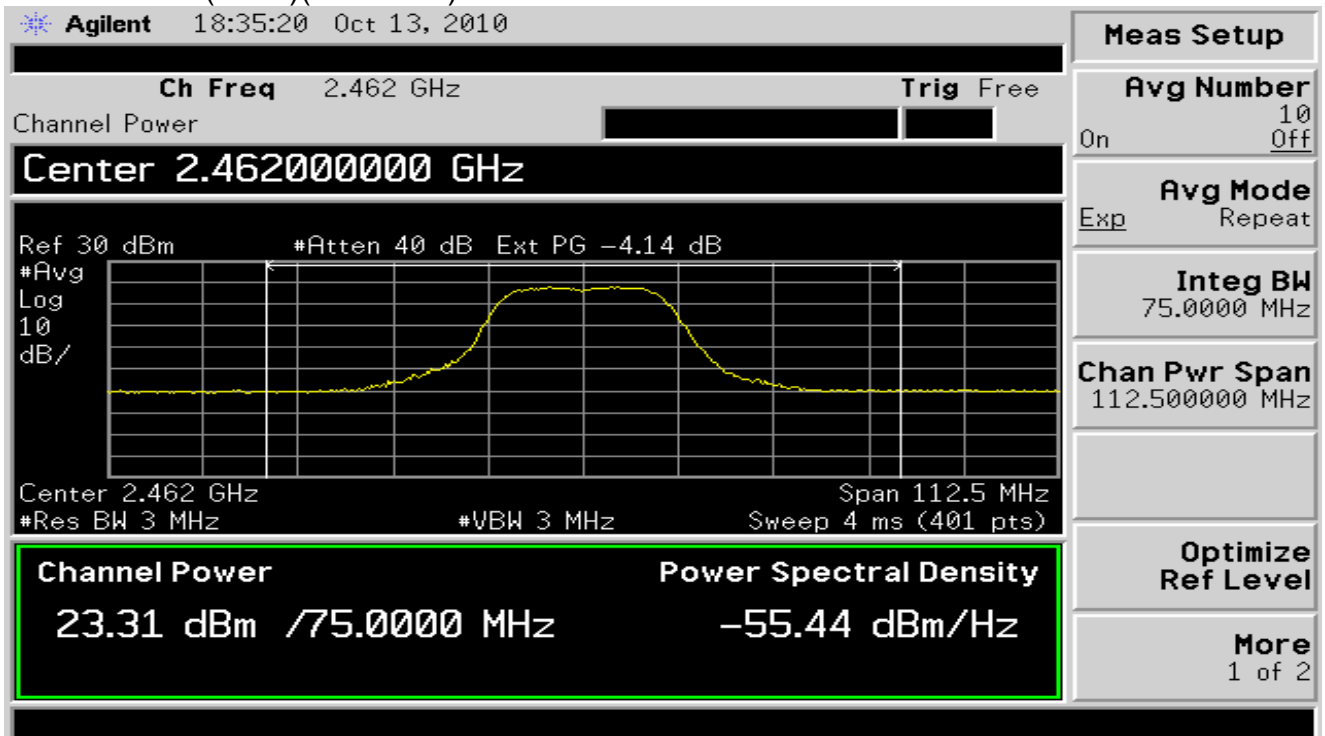


802.11n HT40(Ant 2) (2422MHz)

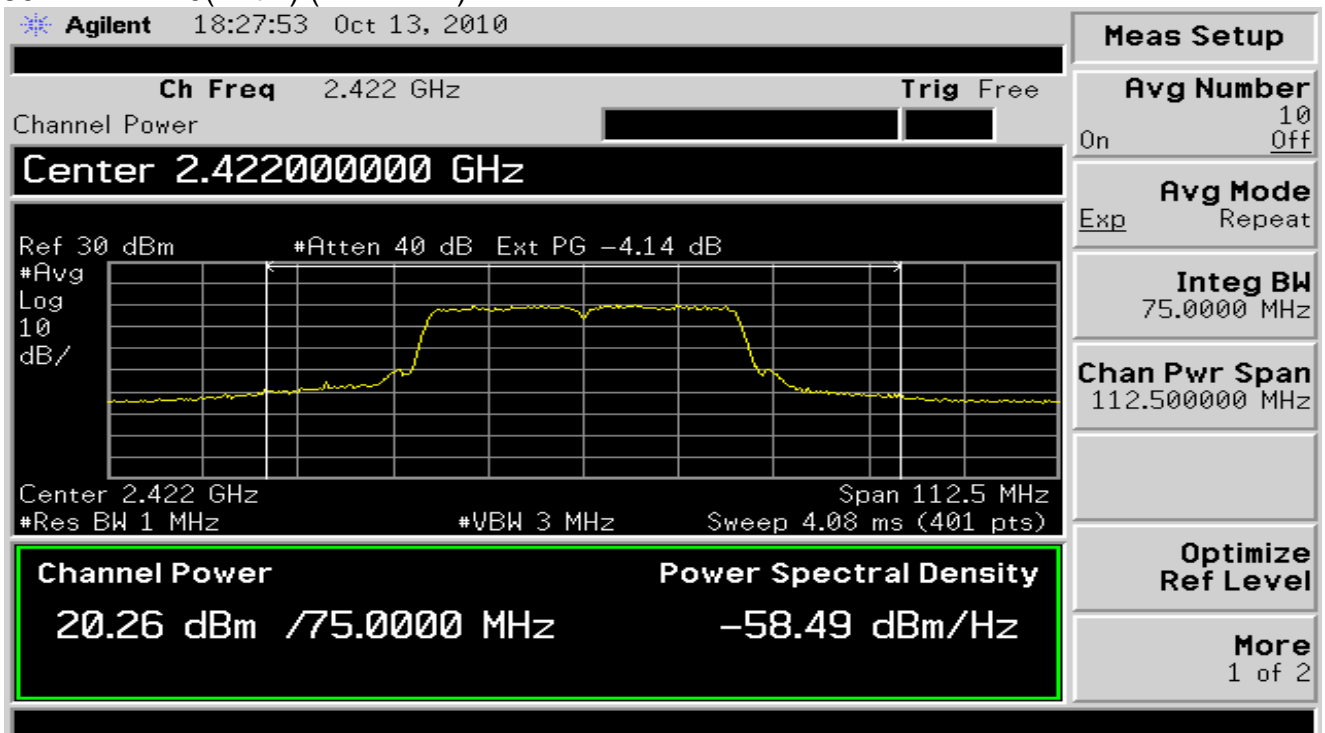

802.11n HT40(Ant 2)(2437MHz)

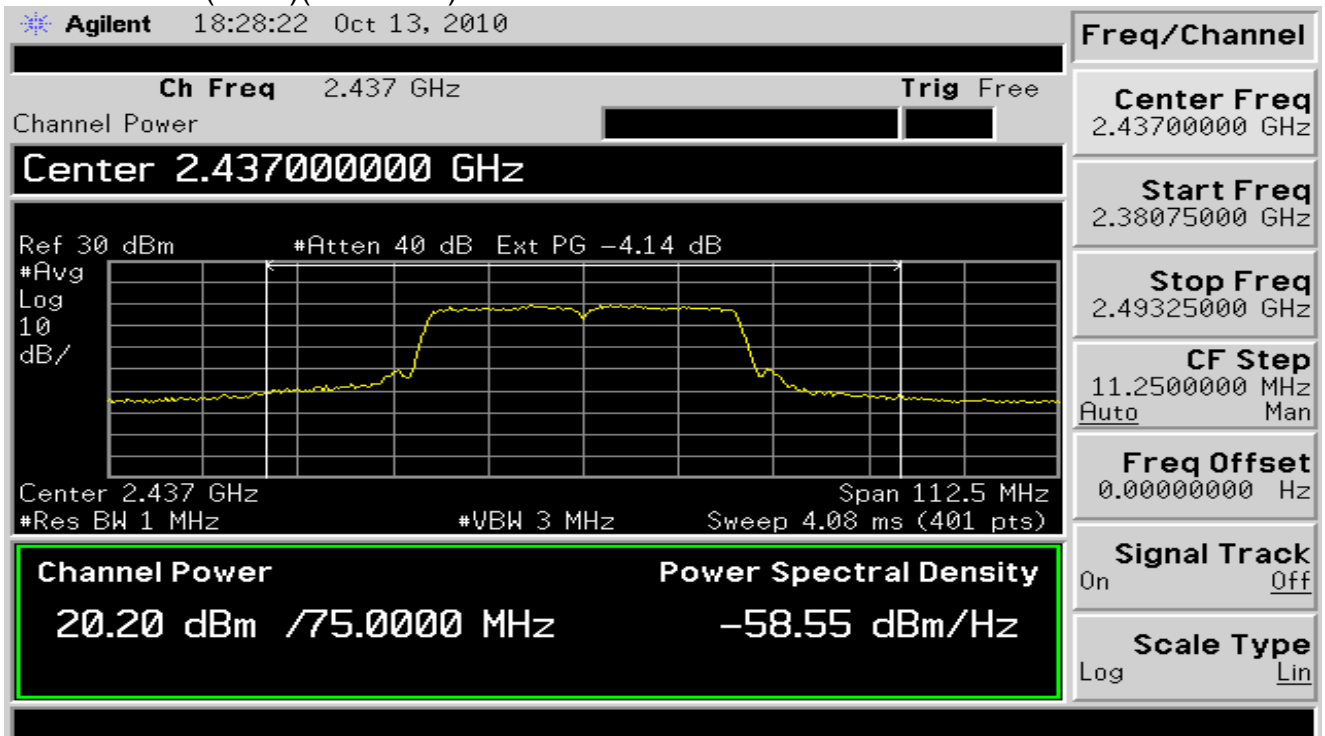

802.11n HT40(Ant 2)(2452MHz)

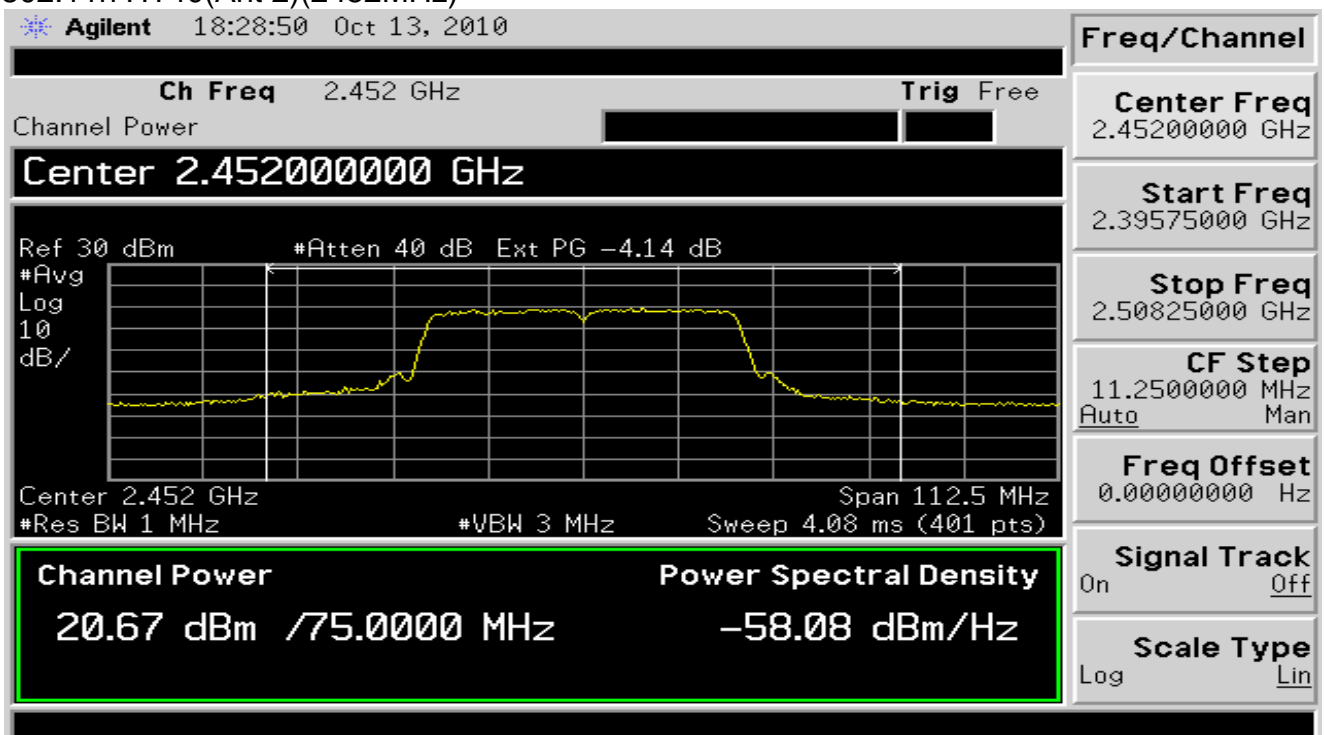


## 4. Minimum 6dB RF Bandwidth Requirements

### 4.1 Test Condition & Setup :

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6,11)

### 4.2 Test Instruments Configuration:

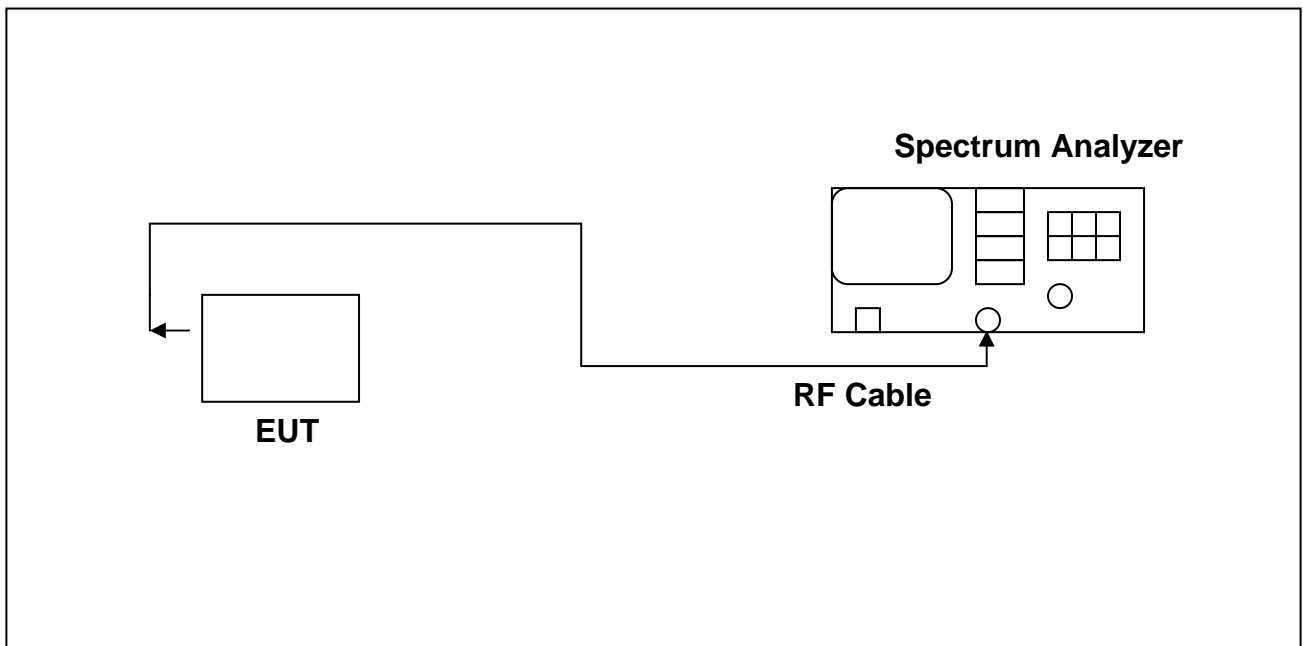

### 4.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cali. Date
1.	Agilent	Spectrum Analyzer	US39240419	E4407B	2010/02/02	2011/02/02

#### 4.4 Test Result:

##### 802.11b

Frequency (MHz)	Min. 6dB Bandwidth (MHz)	Required Limit
2412	6.750	>500KHz
2437	6.375	>500KHz
2462	6.875	>500KHz

##### 802.11g

Frequency (MHz)	Min. 6dB Bandwidth (MHz)	Required Limit
2412	17.500	>500KHz
2437	17.500	>500KHz
2462	17.500	>500KHz

##### 802.11n HT20(Ant 1)

Frequency (MHz)	Min. 6dB Bandwidth (MHz)	Required Limit
2412	17.375	>500KHz
2437	17.500	>500KHz
2462	17.750	>500KHz

##### 802.11n HT40(Ant 1)

Frequency (MHz)	Min. 6dB Bandwidth (MHz)	Required Limit
2422	36.500	>500KHz
2437	36.500	>500KHz
2452	36.500	>500KHz

##### 802.11n HT20(Ant 2)


Frequency (MHz)	Min. 6dB Bandwidth (MHz)	Required Limit
2412	17.500	>500KHz
2437	17.500	>500KHz
2462	17.500	>500KHz

##### 802.11n HT40(Ant 2)


Frequency (MHz)	Min. 6dB Bandwidth (MHz)	Required Limit
2422	36.250	>500KHz
2437	36.250	>500KHz
2452	36.250	>500KHz

**Note :** Test Graphs See next page.


802.11b (2412MHz)

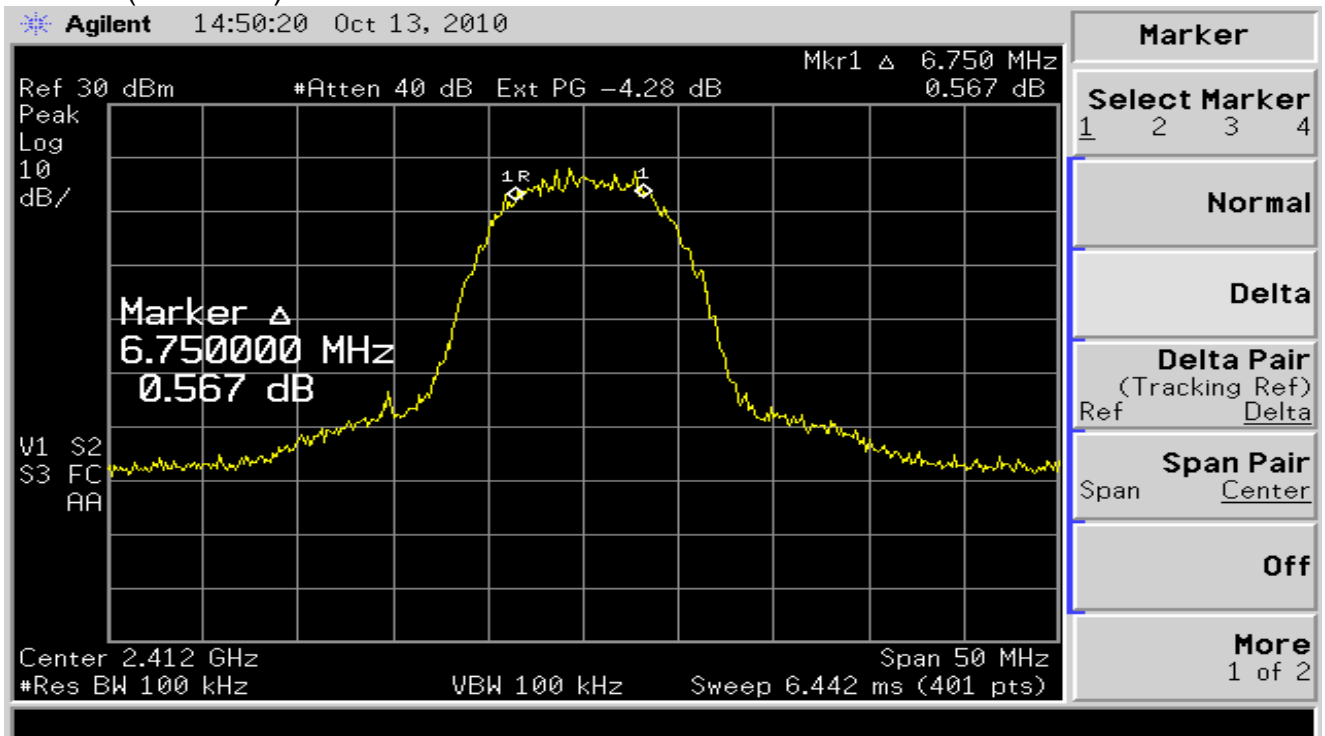


802.11b (2437MHz)

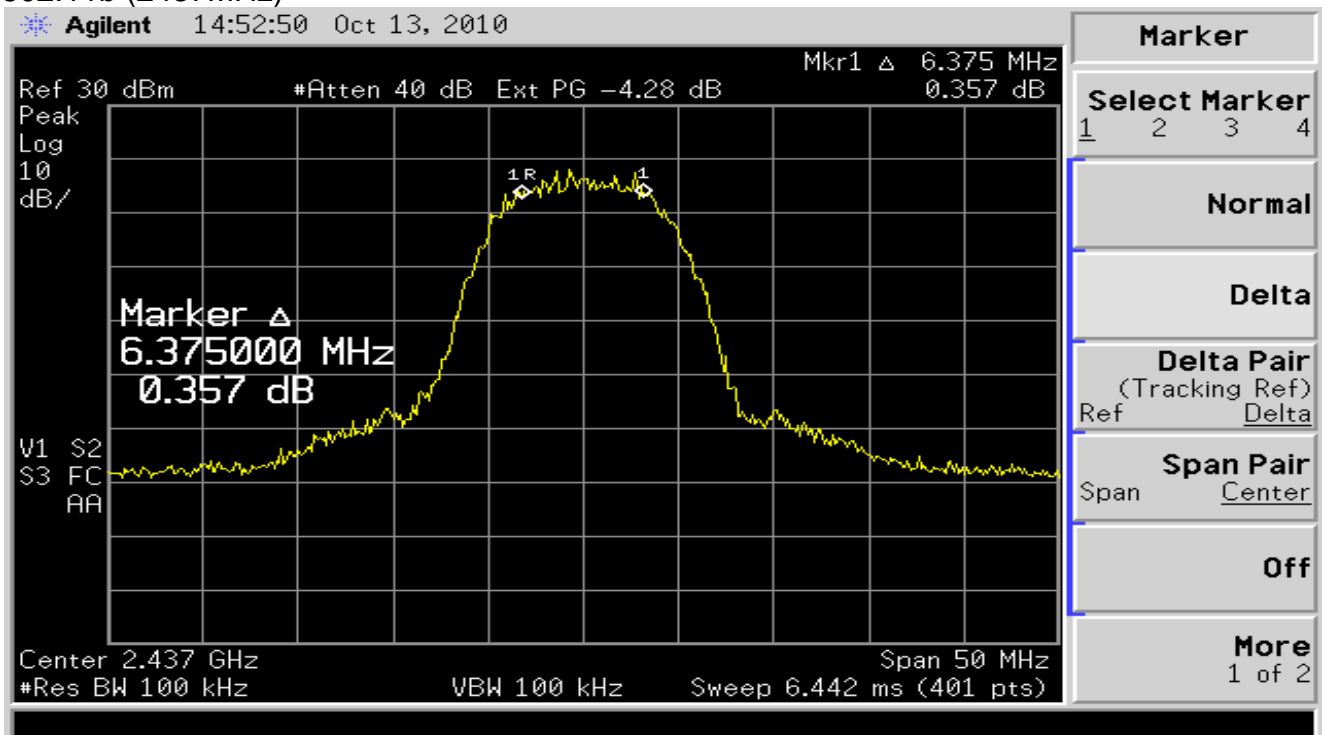


802.11b (2462MHz)

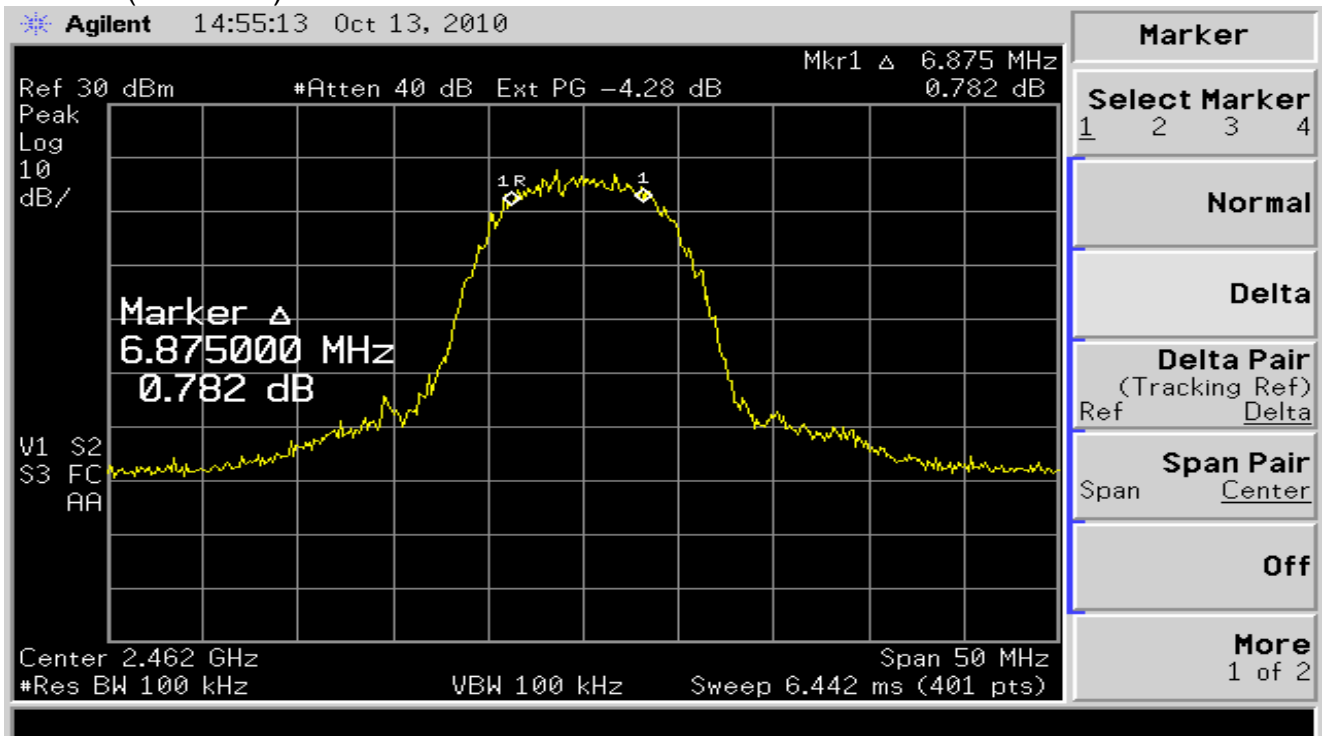


802.11g (2412MHz)

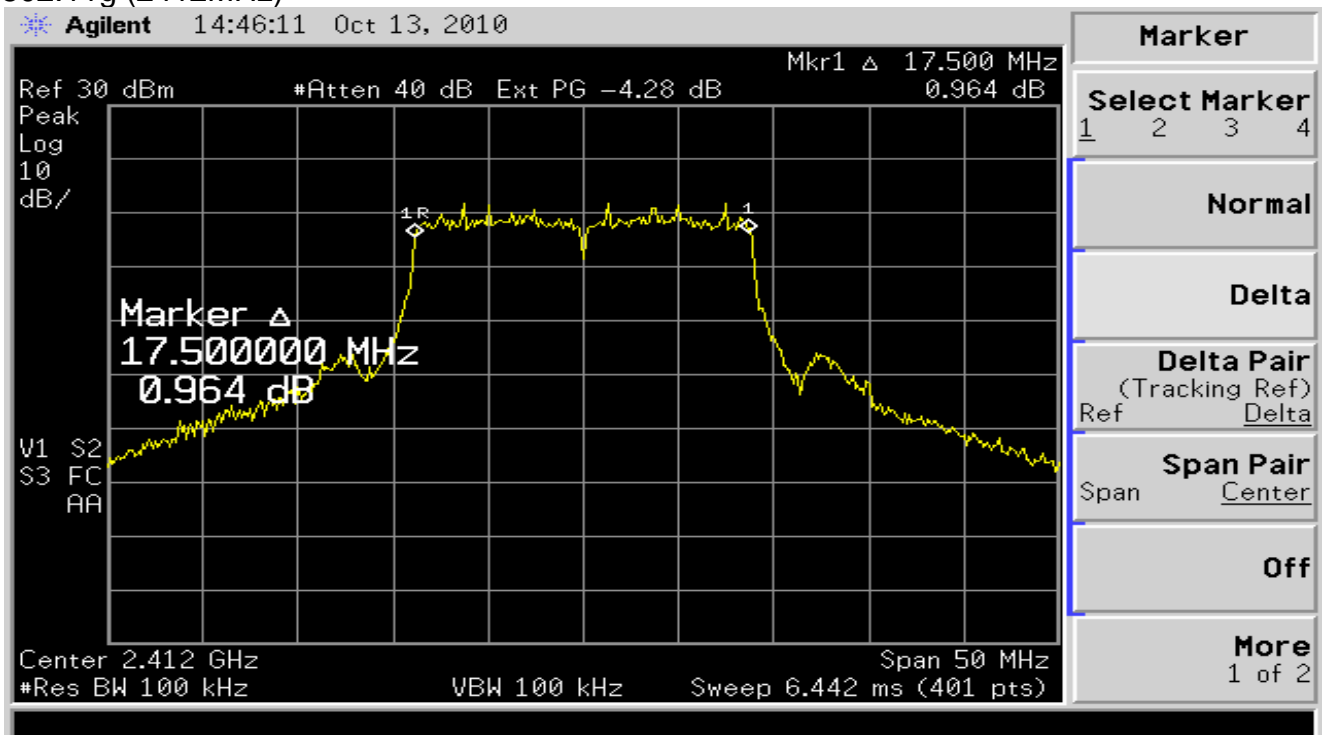

802.11g (2437MHz)

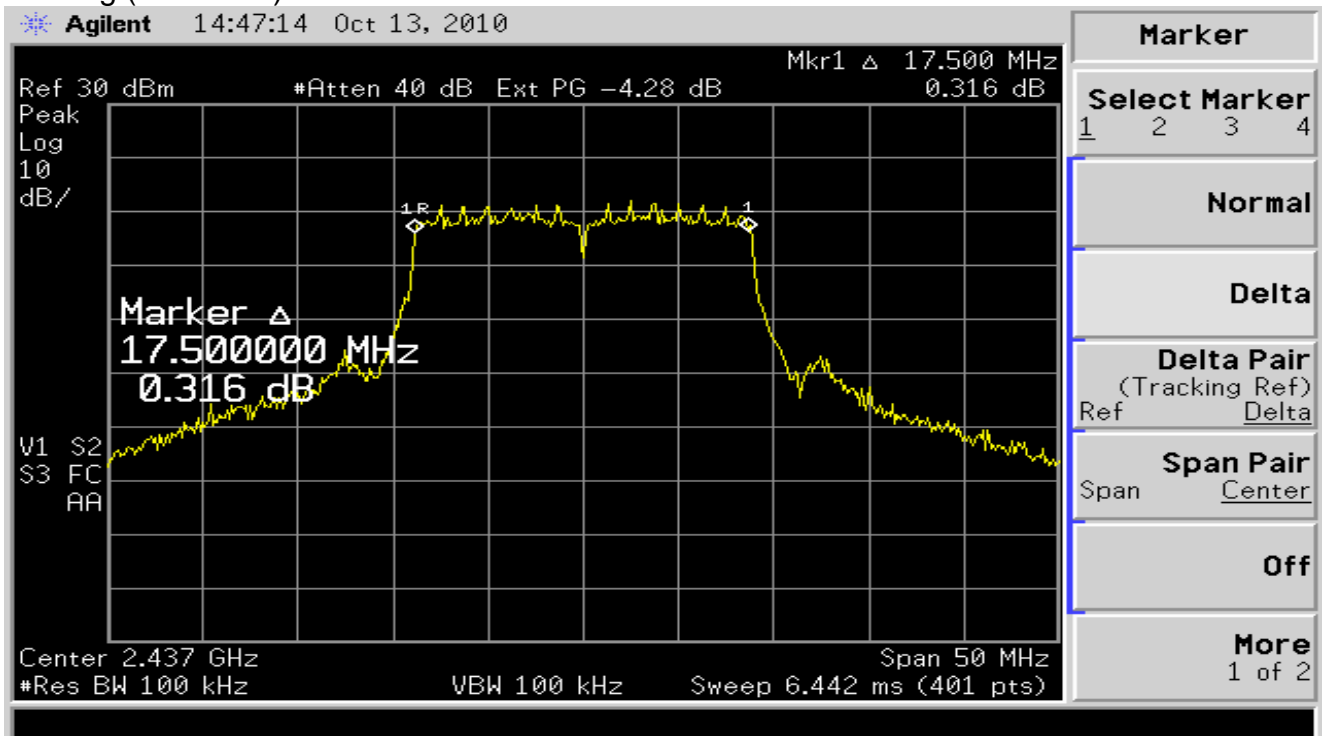


802.11g (2462MHz)

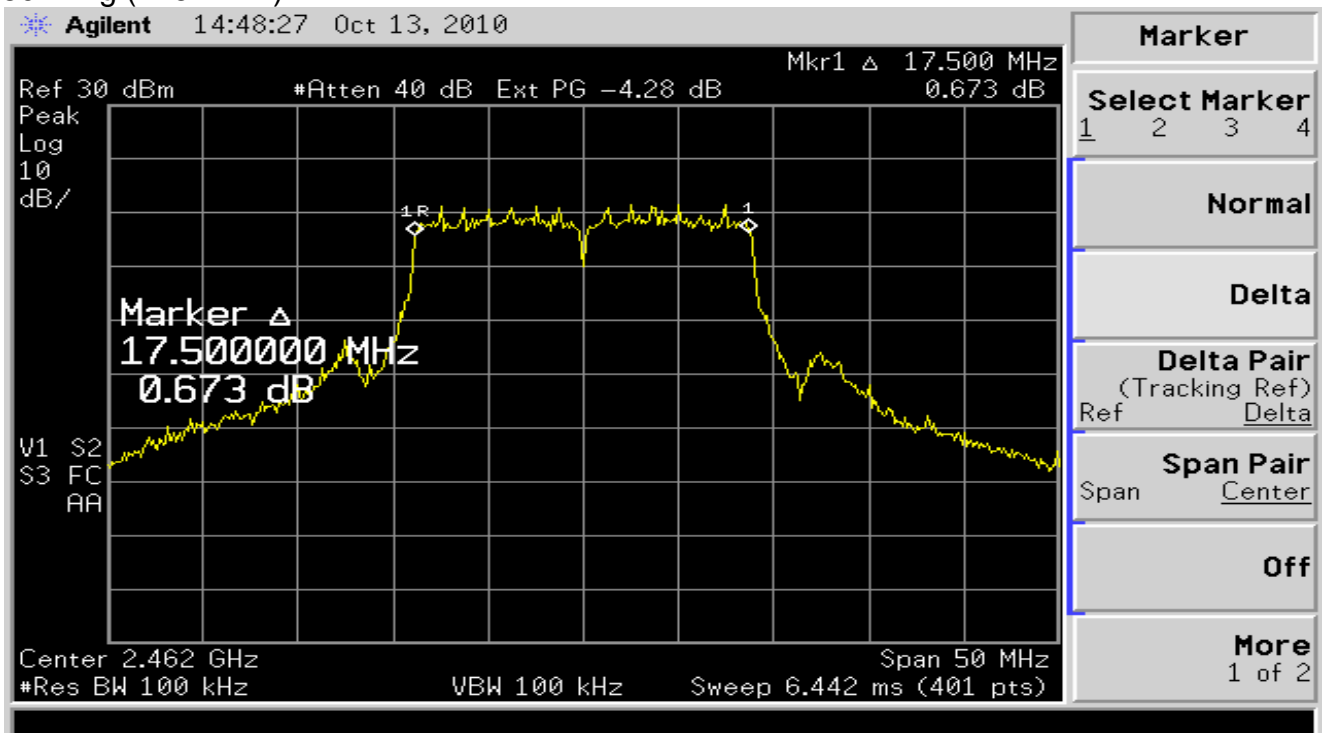





802.11n HT20(Ant 1)(2412MHz)

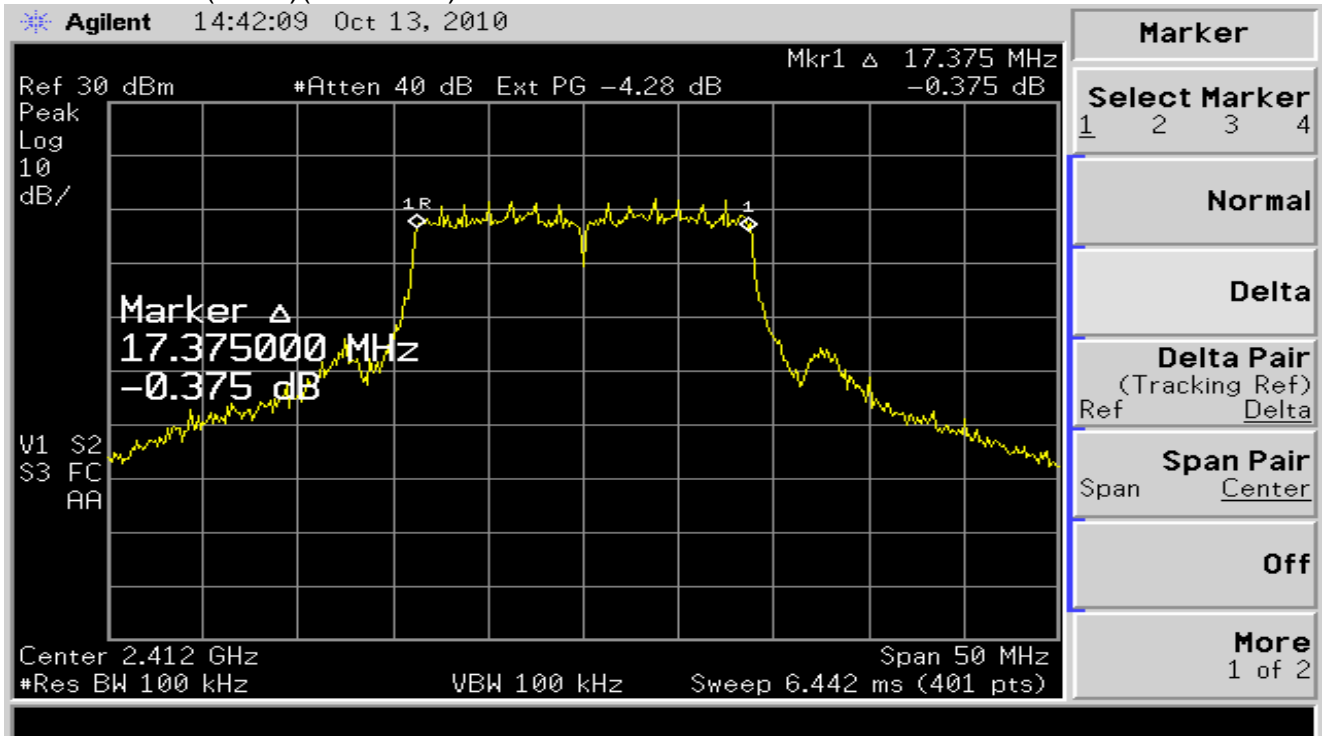


802.11n HT20(Ant 1)(2437MHz)

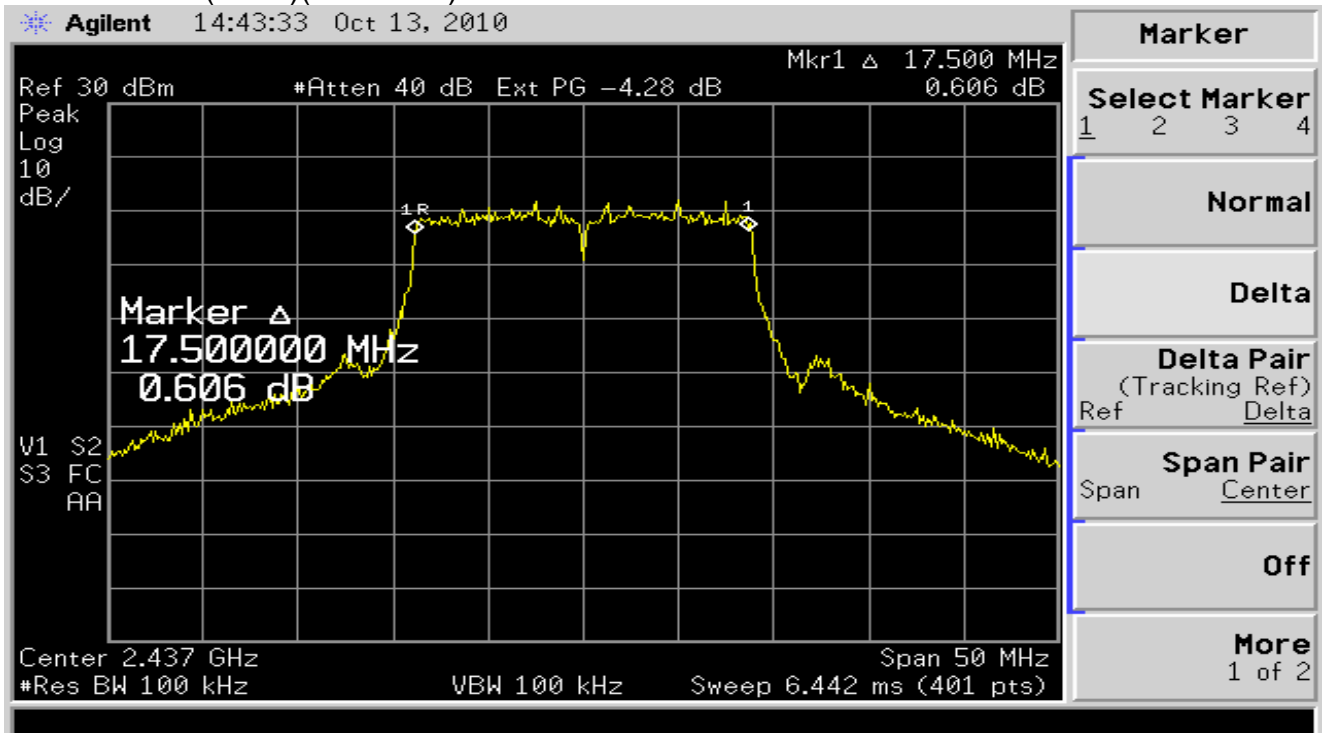


802.11n HT20(Ant 1)(2462MHz)

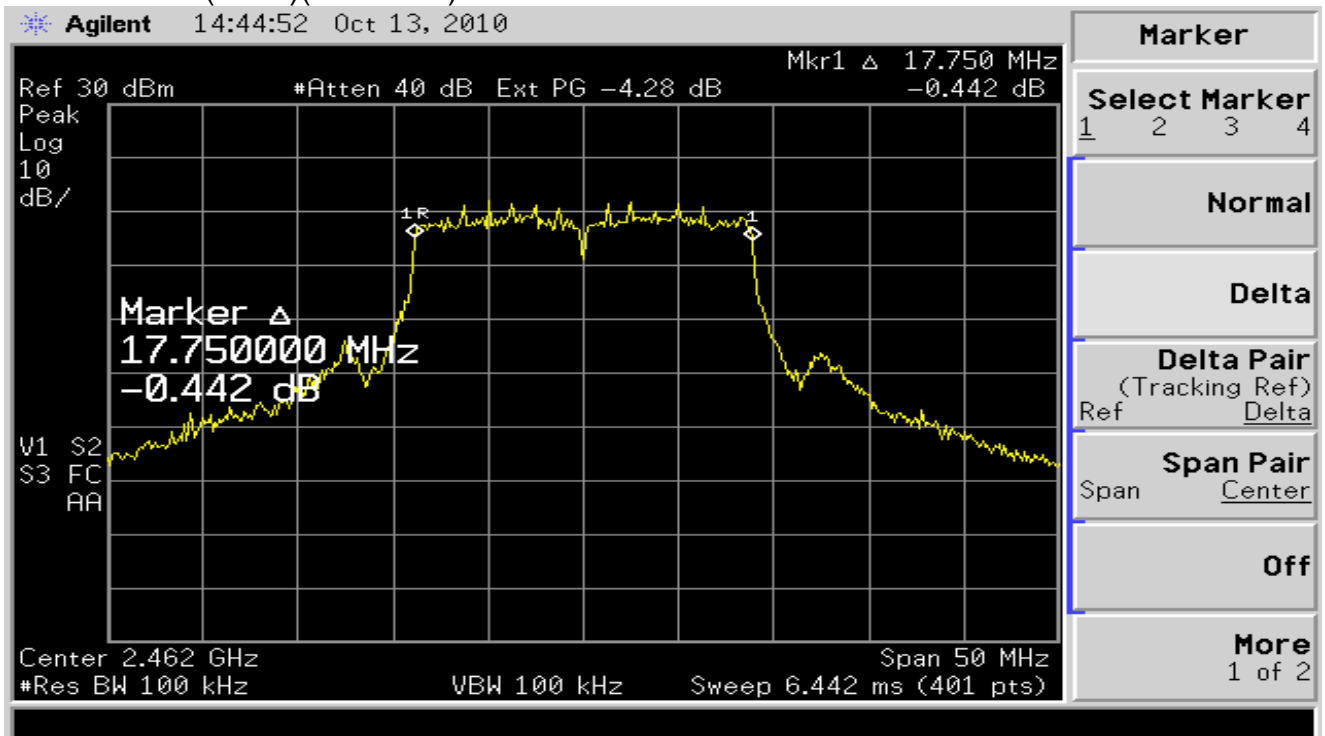


802.11n HT40(Ant 1)(2422MHz)

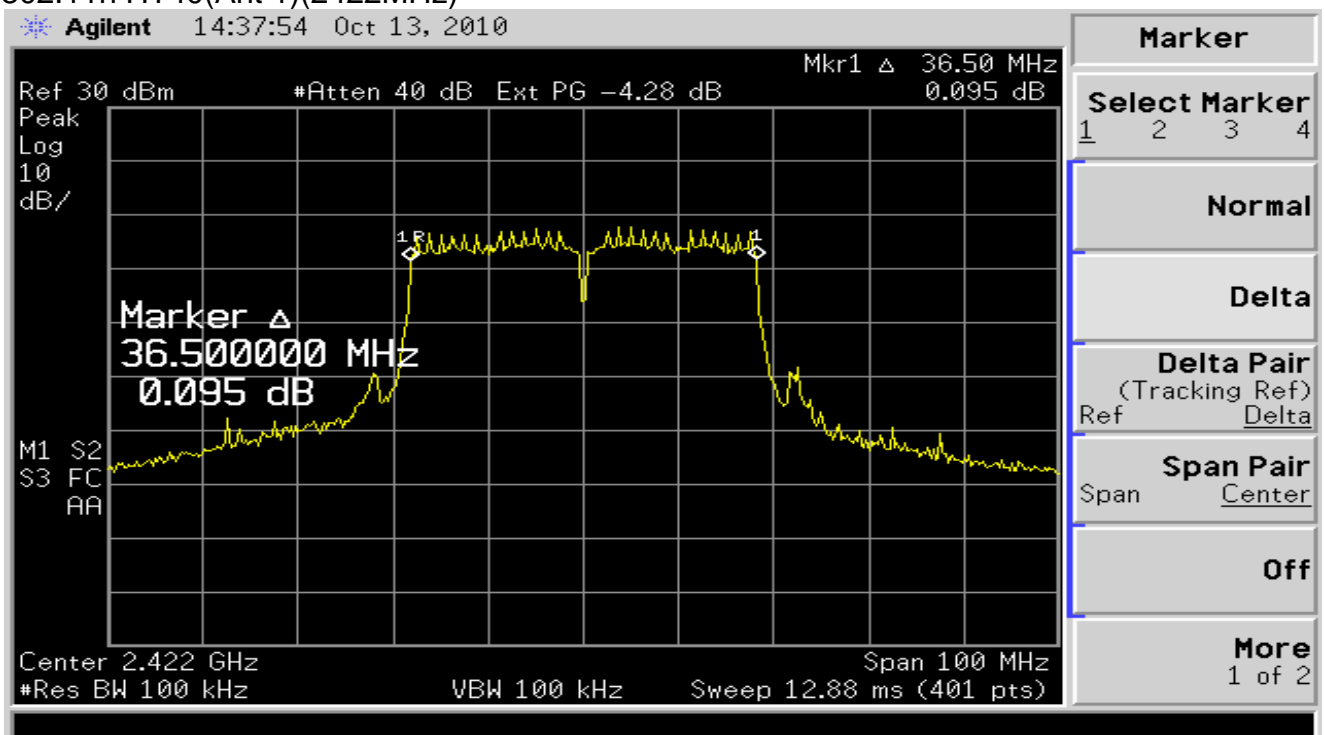


802.11n HT40(Ant 1) (2437MHz)

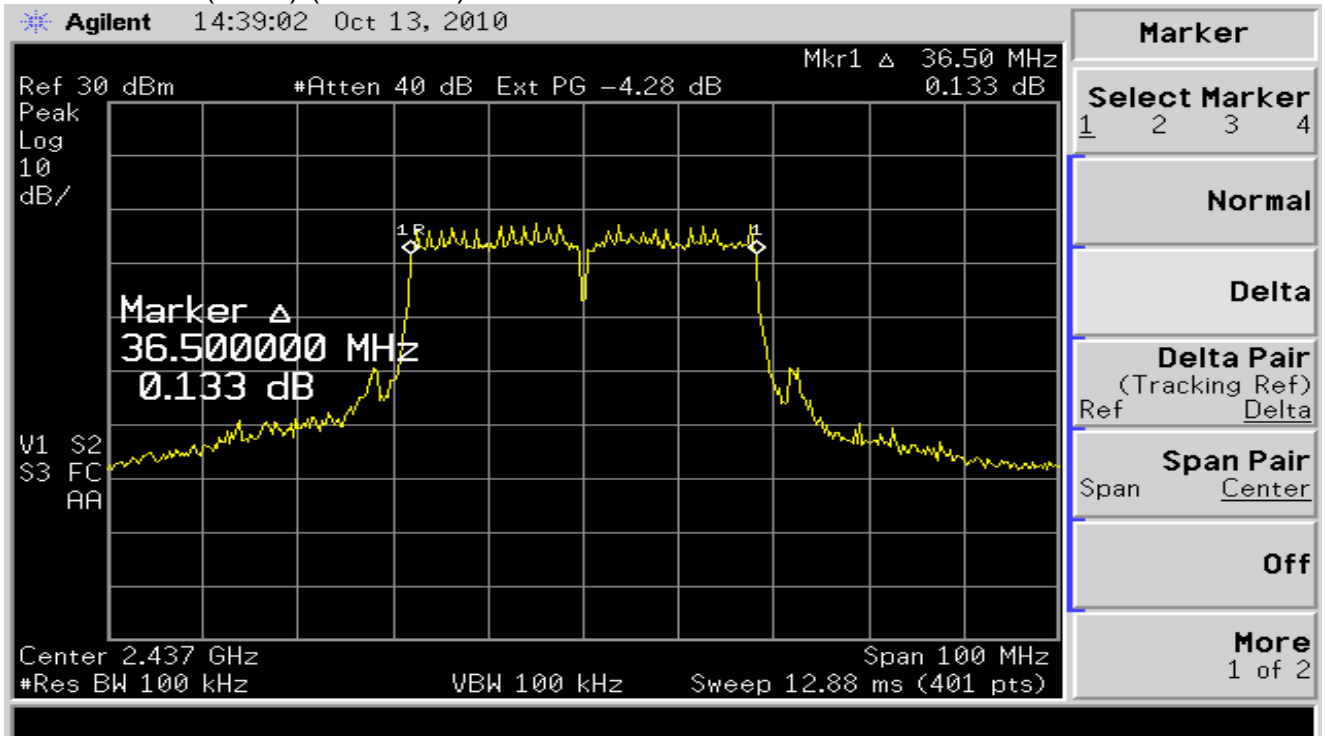


802.11n HT40(Ant 1) (2452MHz)

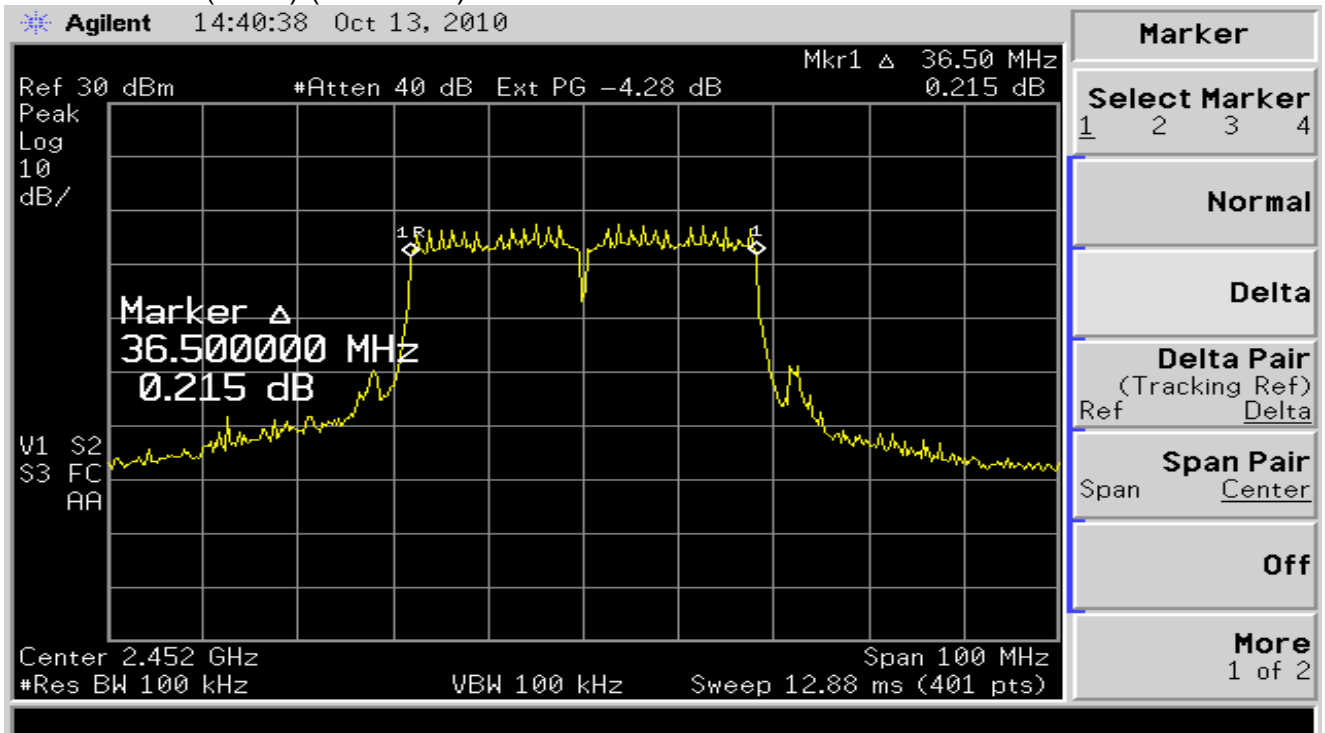


802.11n HT20(Ant 2)(2412MHz)

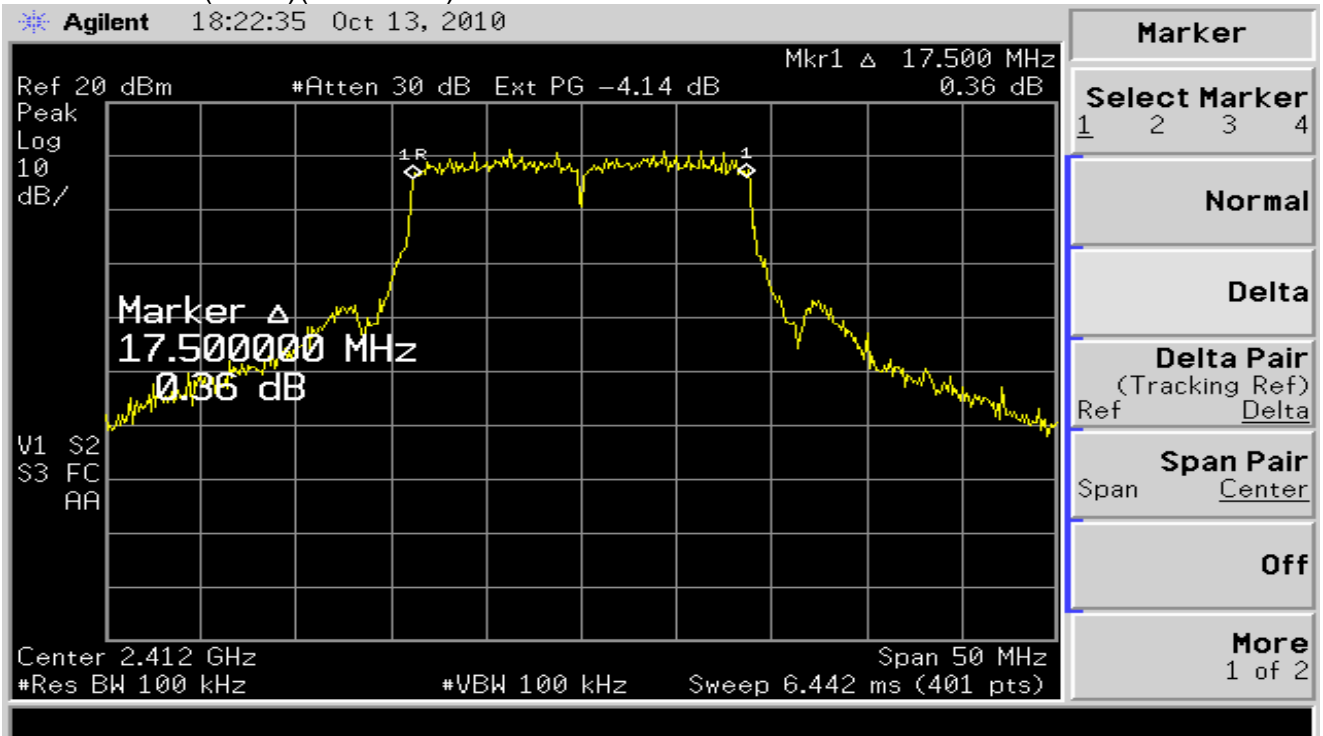


802.11n HT20(Ant 2)(2437MHz)

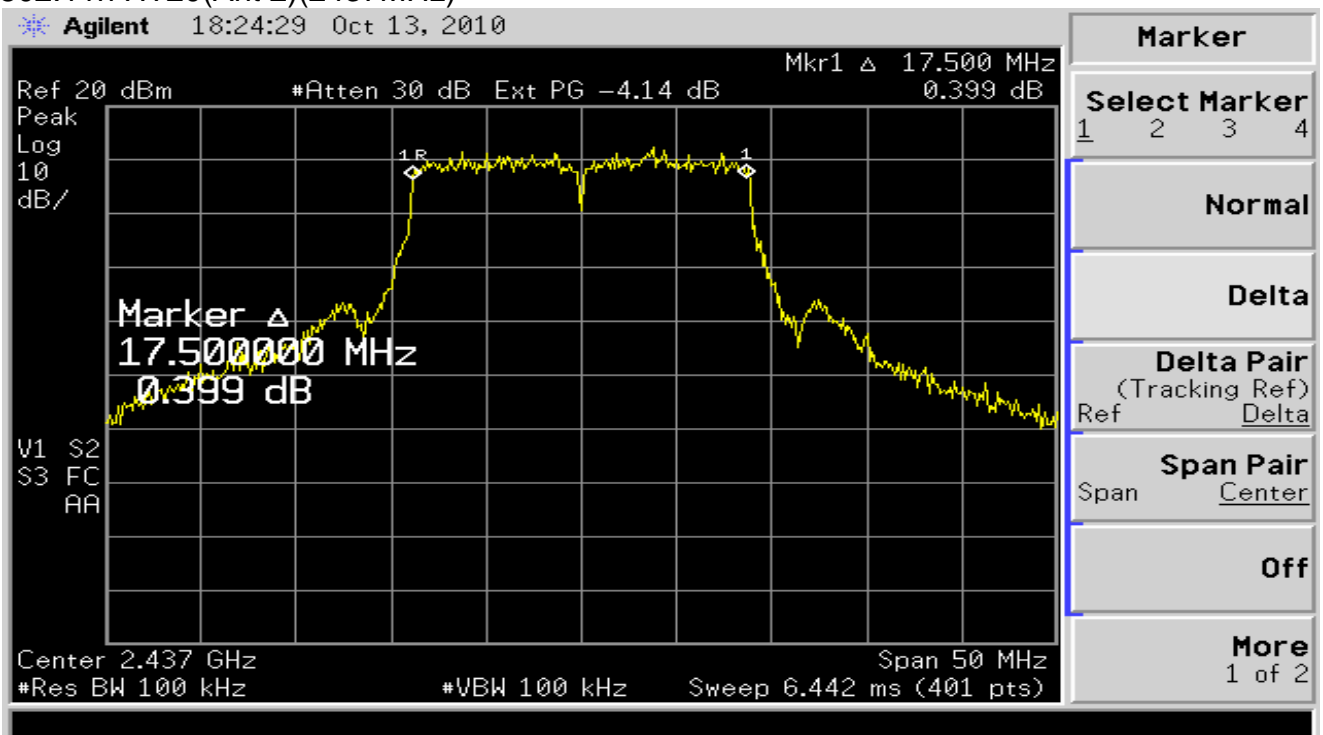


802.11n HT20(Ant 2)(2462MHz)

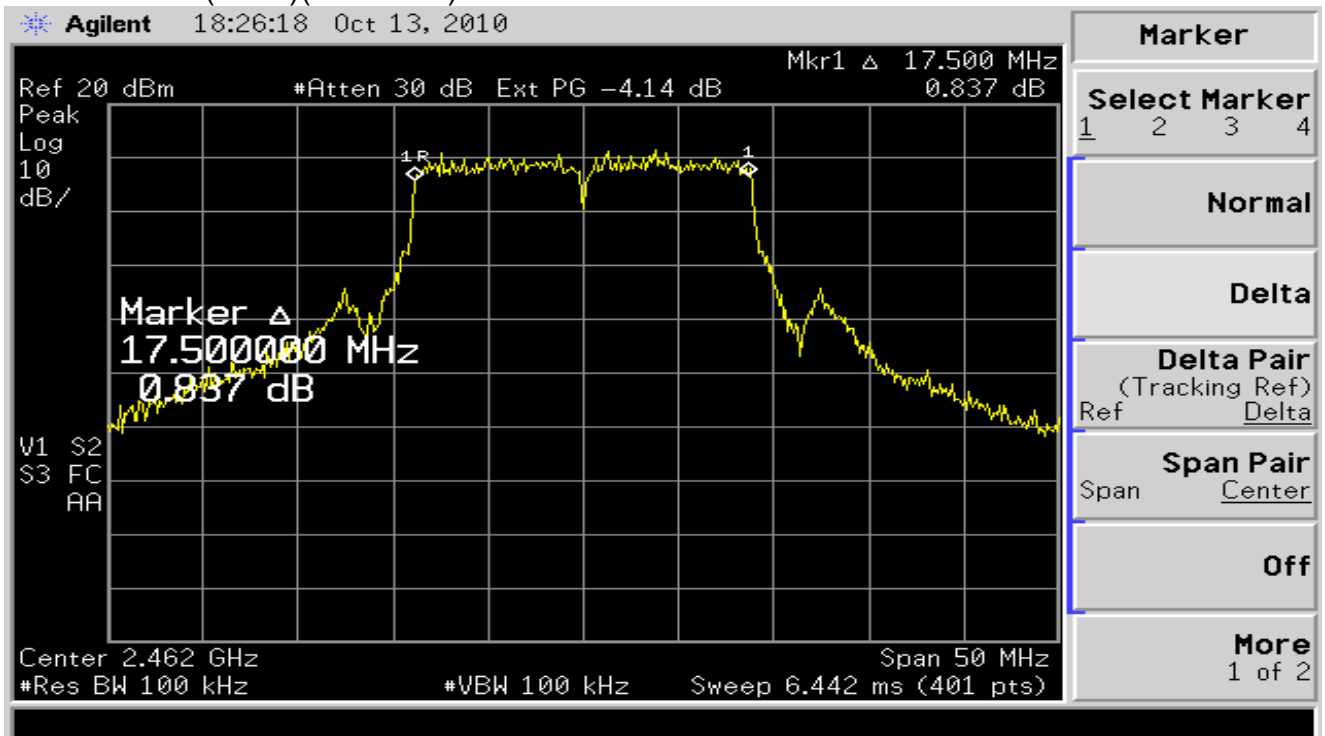


802.11n HT40(Ant 2)(2422MHz)

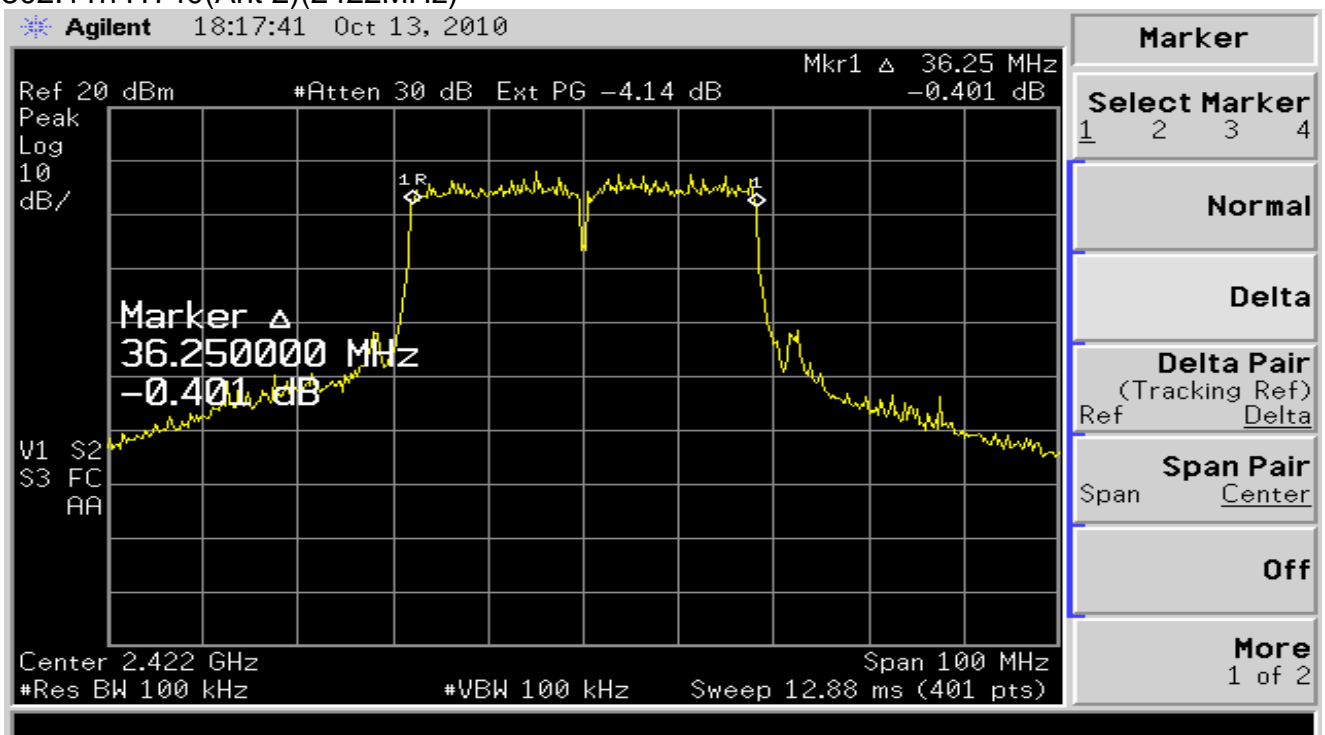

802.11n HT40(Ant 2)(2437MHz)

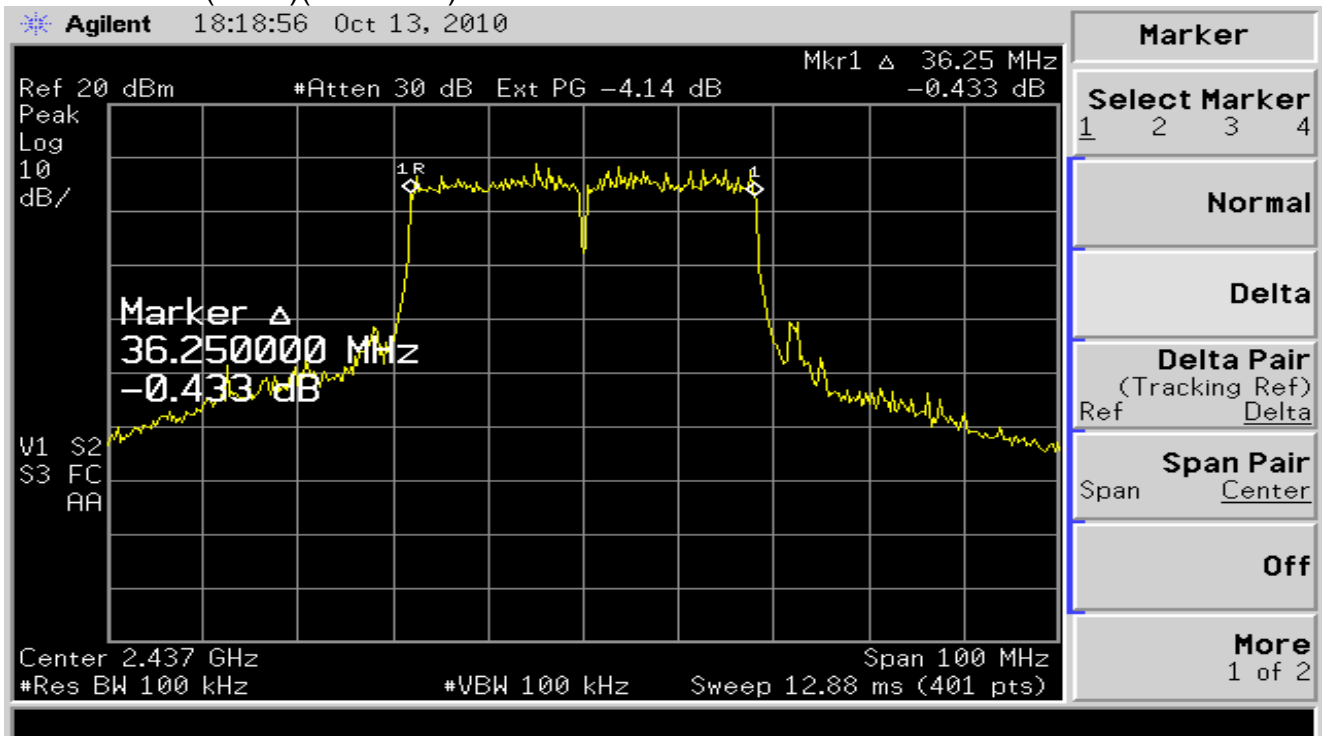

802.11n HT40(Ant 2)(2452MHz)

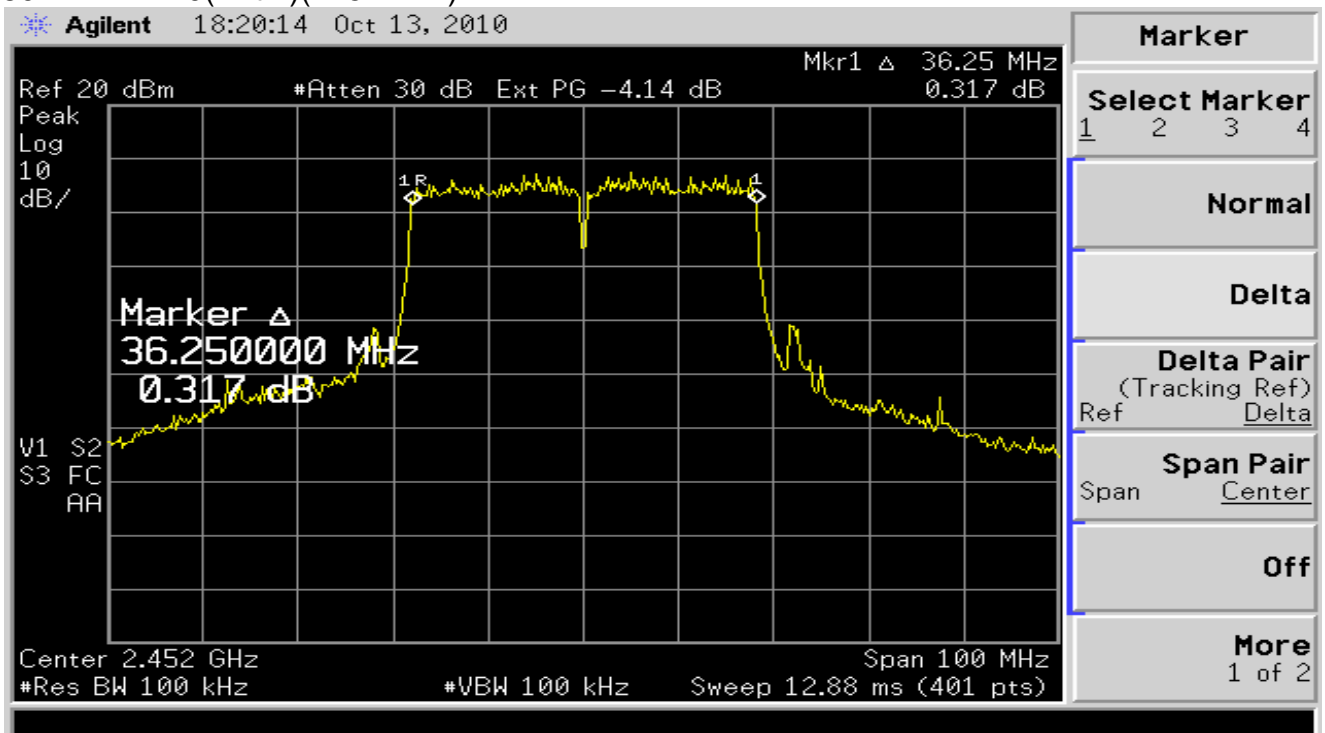

## 5. Maximum Power Density Requirements


### 5.1 Test Condition & Setup :

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output passband. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

### 5.2 Test Instruments Configuration:

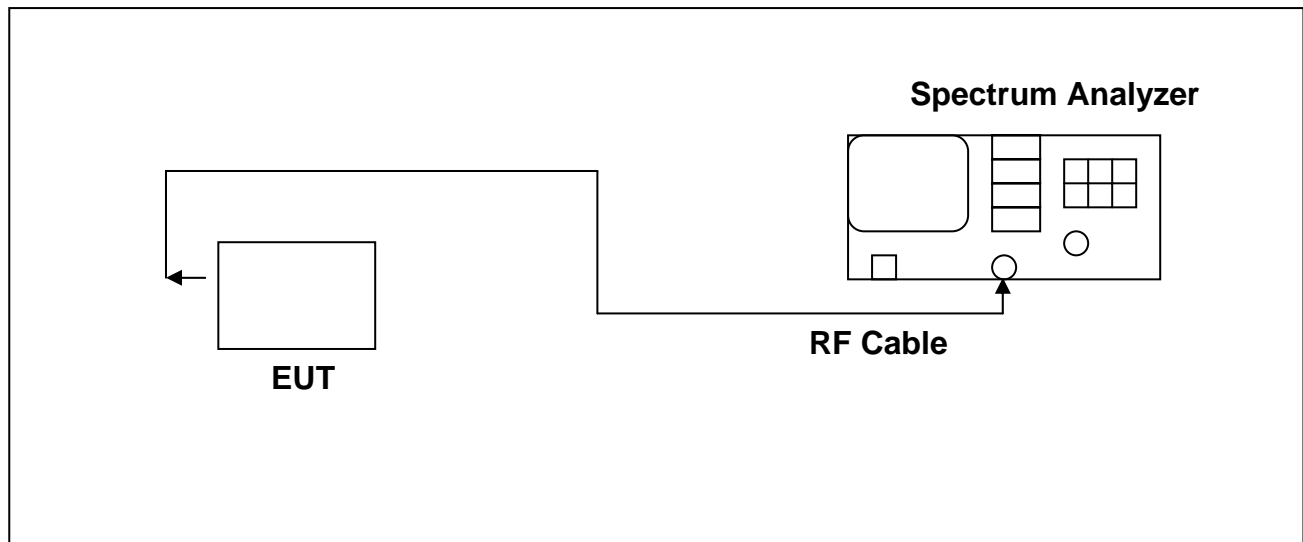

### 5.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cali. Date
1.	Agilent	Spectrum Analyzer	US39240419	E4407B	2010/02/02	2011/02/02

## 5.4 Test Result:

### 802.11b

Frequency (MHz)	Power Density (dBm)	Required Limit
2412	1.846	<8dBm
2437	1.712	<8dBm
2462	1.787	<8dBm

### 802.11g

Frequency (MHz)	Power Density (dBm)	Required Limit
2412	-4.267	<8dBm
2437	-3.898	<8dBm
2462	-4.446	<8dBm

### 802.11n HT20(Ant 1)

Frequency (MHz)	Power Density (dBm)	Required Limit
2412	-3.940	<8dBm
2437	-4.119	<8dBm
2462	-4.535	<8dBm

### 802.11n HT40(Ant 1)

Frequency (MHz)	Power Density (dBm)	Required Limit
2422	-12.45	<8dBm
2437	-12.72	<8dBm
2452	-11.60	<8dBm

### 802.11n HT20(Ant 2)

Frequency (MHz)	Power Density (dBm)	Required Limit
2412	-3.966	<8dBm
2437	-3.894	<8dBm
2462	-3.761	<8dBm


### 802.11n HT40(Ant 2)

Frequency (MHz)	Power Density (dBm)	Required Limit
2422	-12.88	<8dBm
2437	-11.17	<8dBm
2452	-12.40	<8dBm


**Note :** 1.Frequency Span = 600KHz  
 2.Sweep Time = 200secs  
 3.Test Graphs See next page.




802.11b (2412MHz)

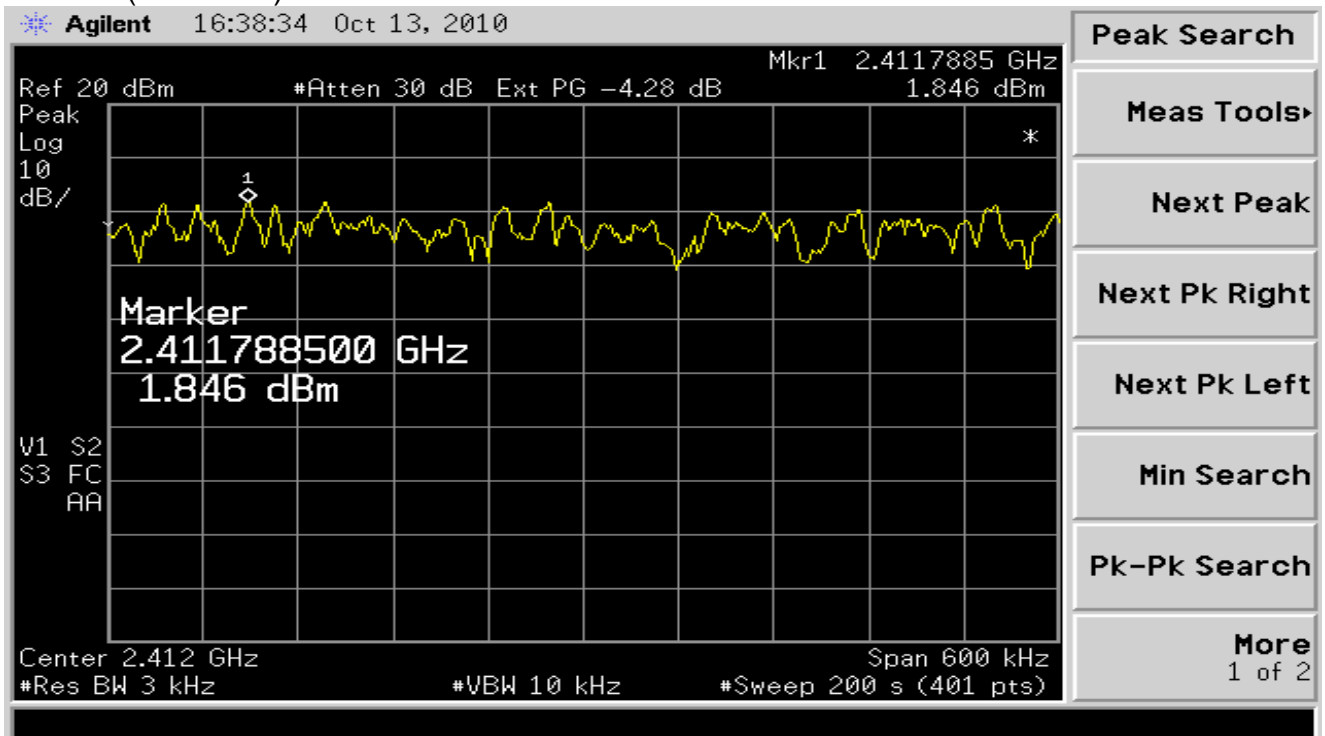


802.11g (2437MHz)

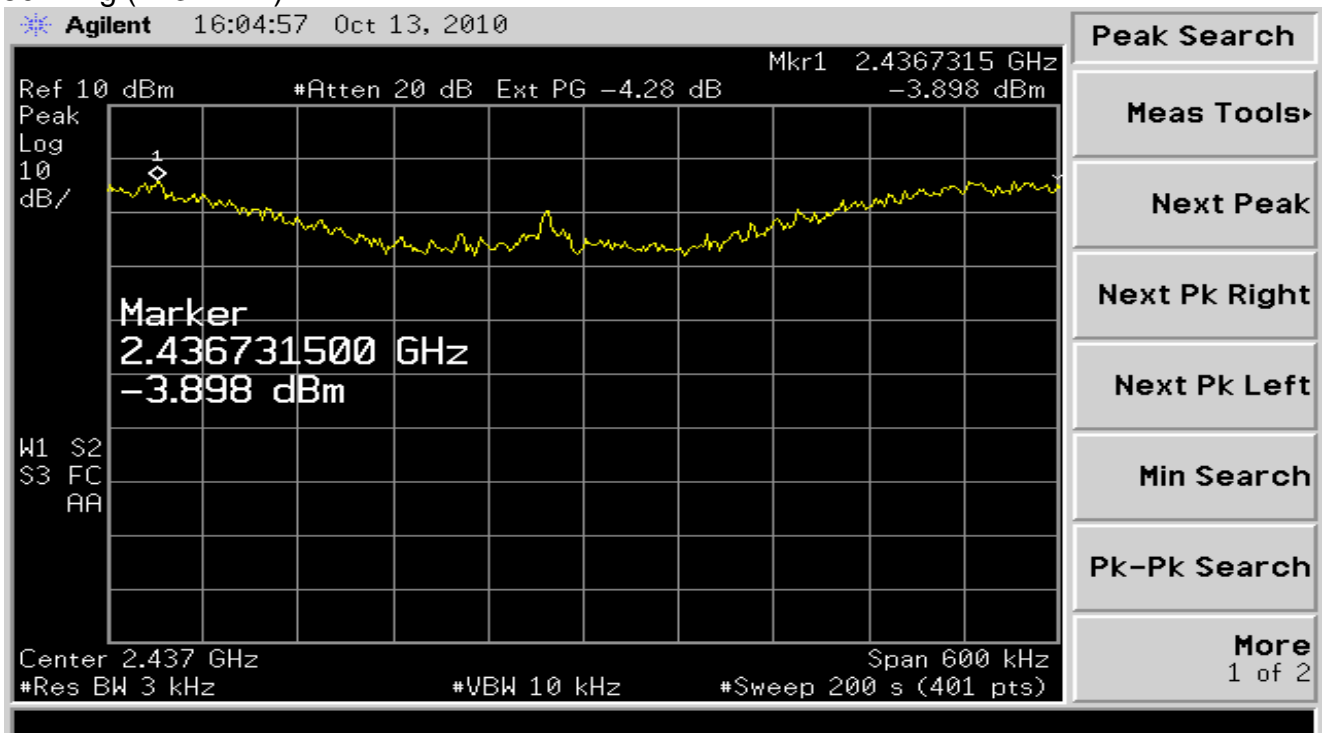


802.11n HT20(Ant 1)(2412MHz)

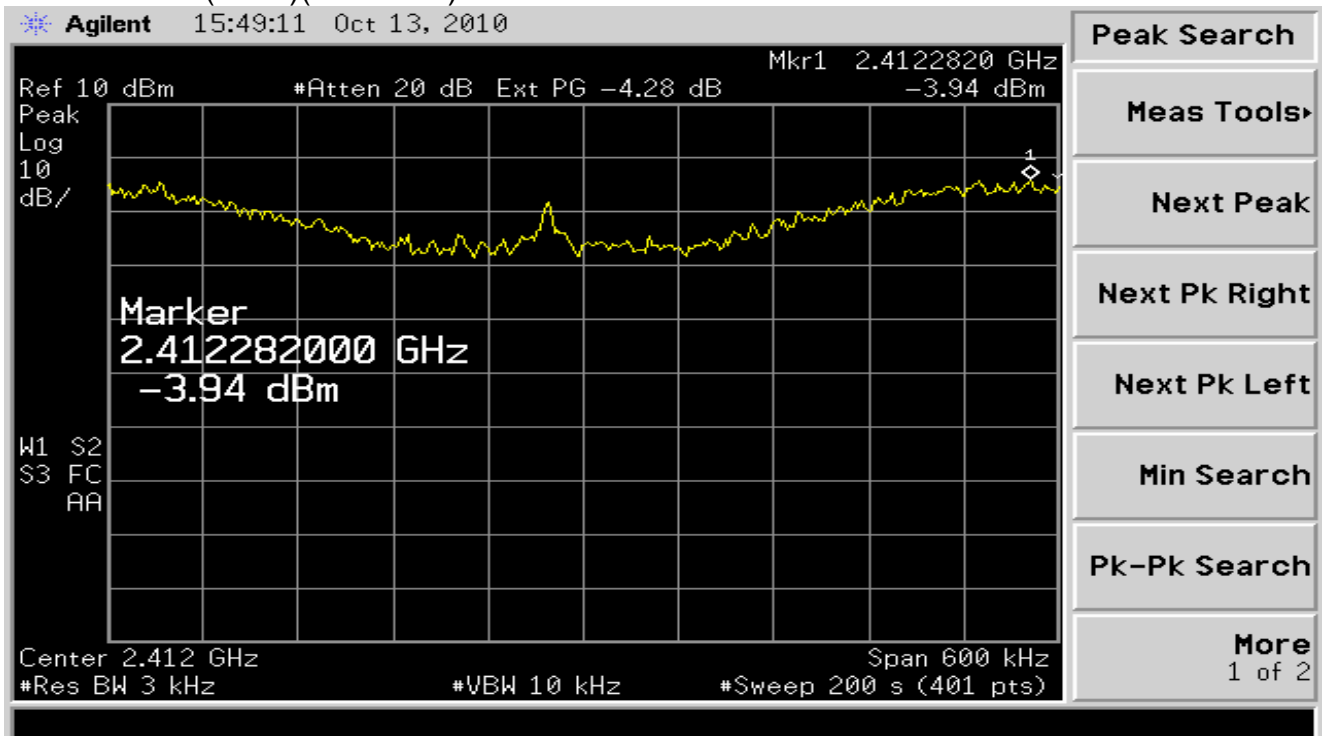


802.11n HT40(Ant 1)(2452MHz)

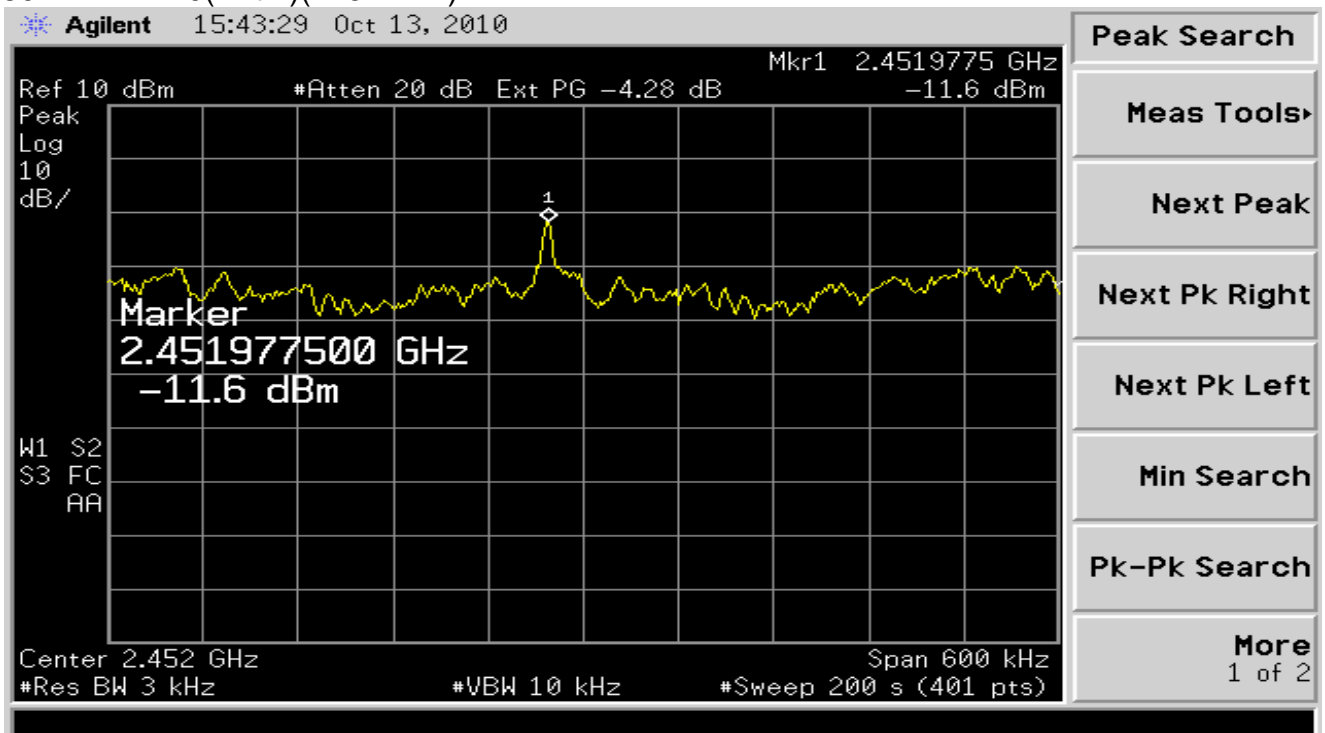

802.11n HT20(Ant 2)(2462MHz)

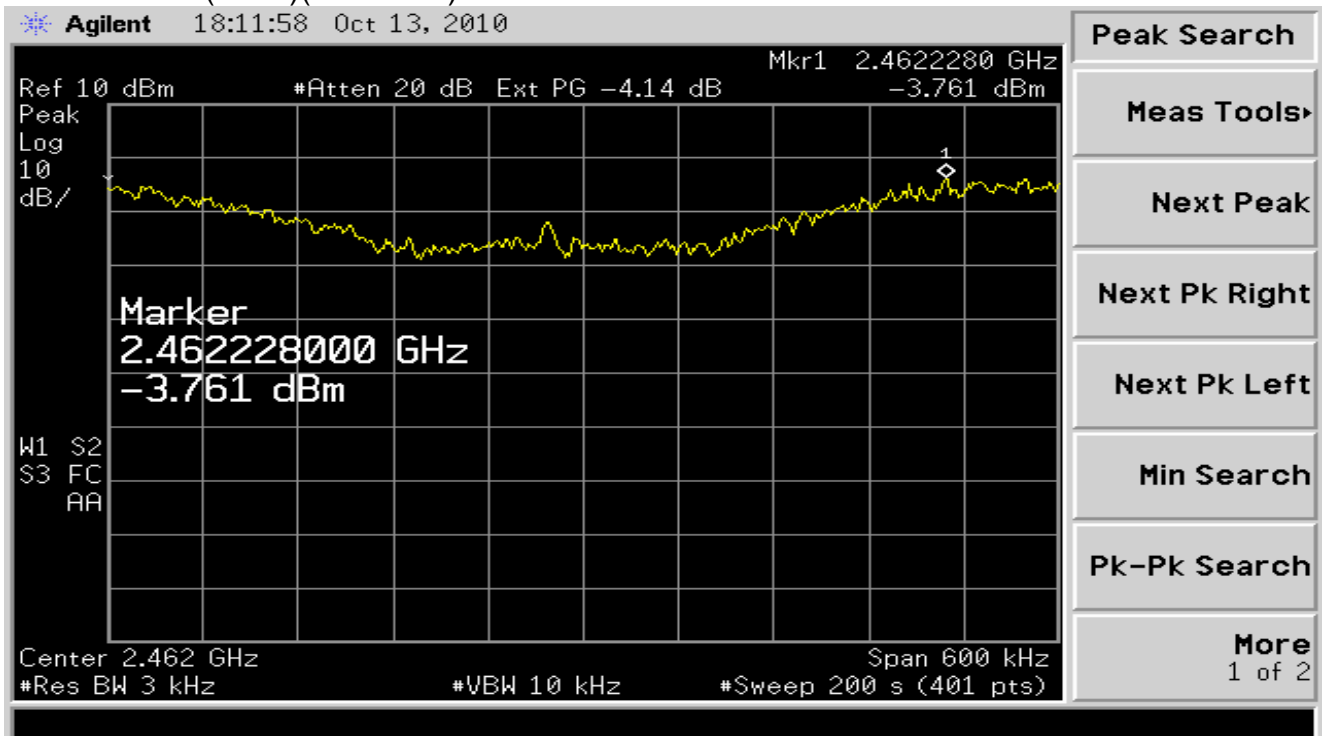

802.11n HT40(Ant 2)(2437MHz)

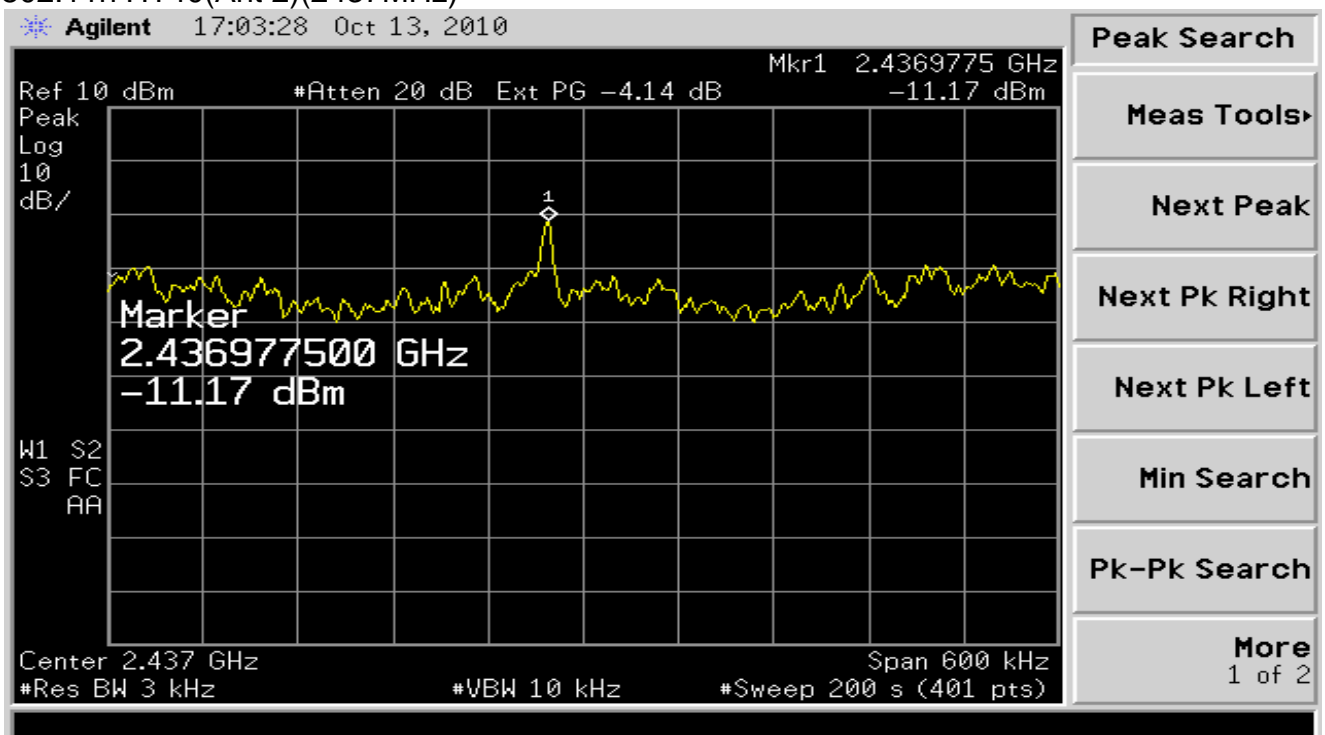


## 6. Out of Band Conducted Emissions Requirements

### 6.1 Test Condition & Setup :

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6,11)

### 6.2 Test Instruments Configuration:

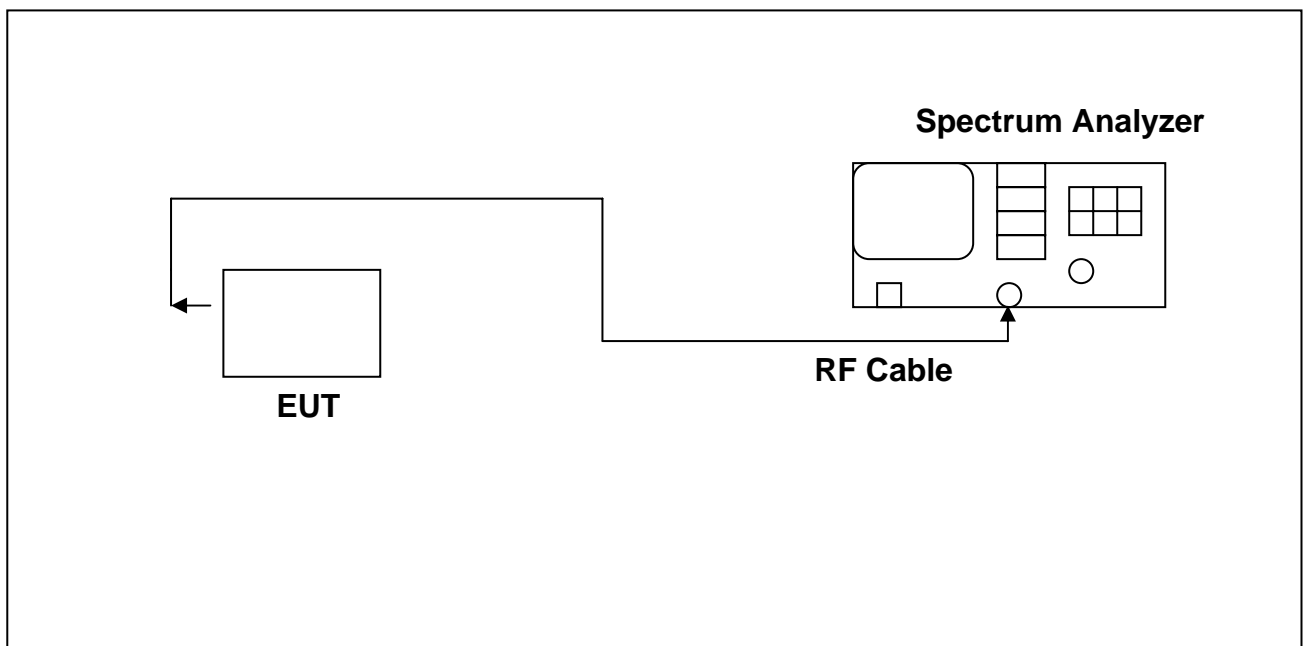

### 6.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cali. Date
1.	Agilent	Spectrum Analyzer	US39240419	E4407B	2010/02/02	2011/02/02




## 6.4 Test Result:


Refer to attached data sheets. Data shows out of band emissions are suppressed well below the -20 dBc minimum required by the Rules.

**Note :** Test Graphs See next page.


802.11b (CH01) (1 of 2)

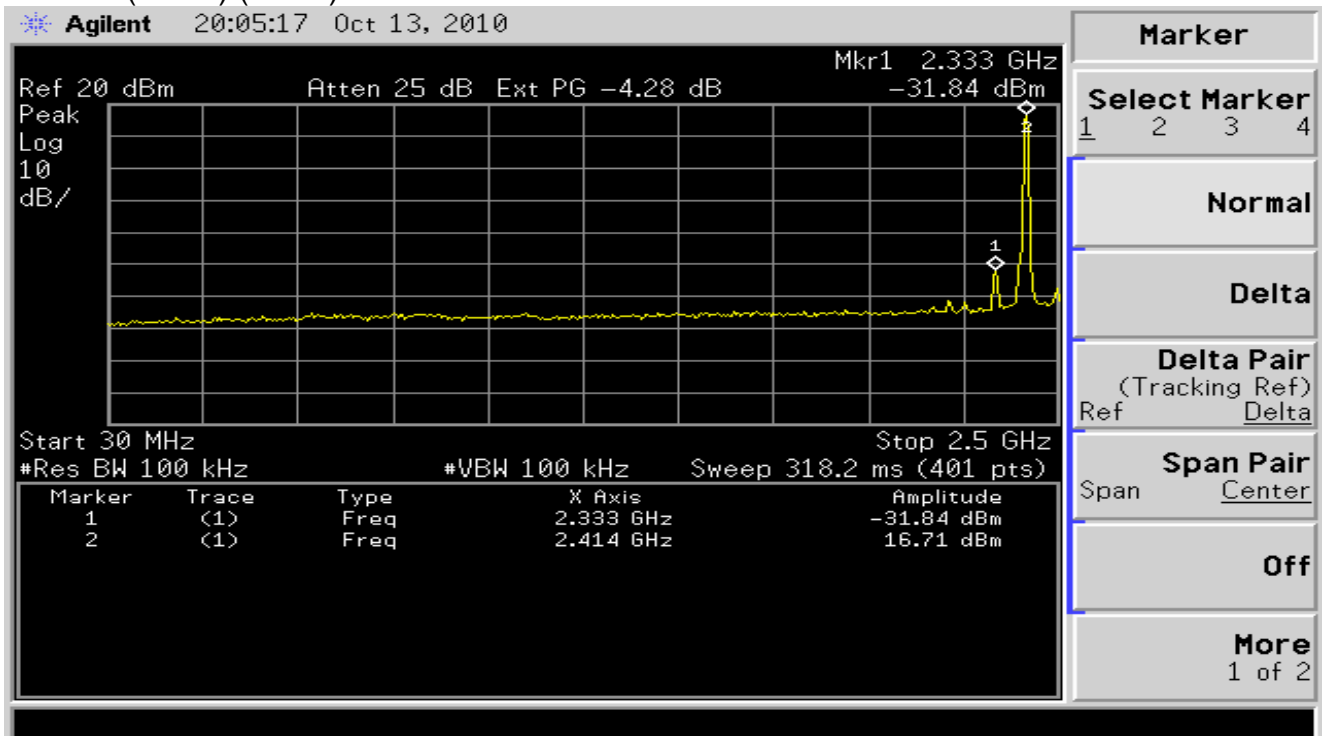


802.11b (CH01) (2 of 2)

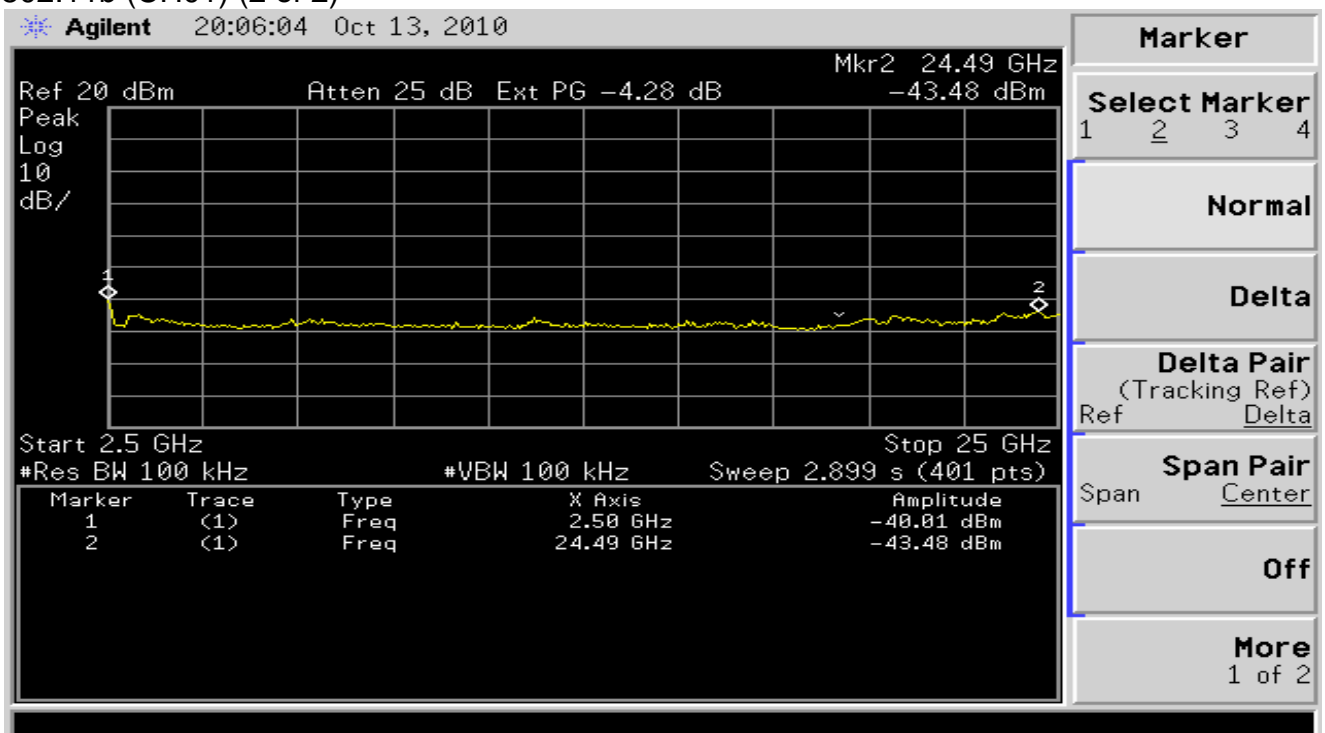


802.11b (CH06) (1 of 2)

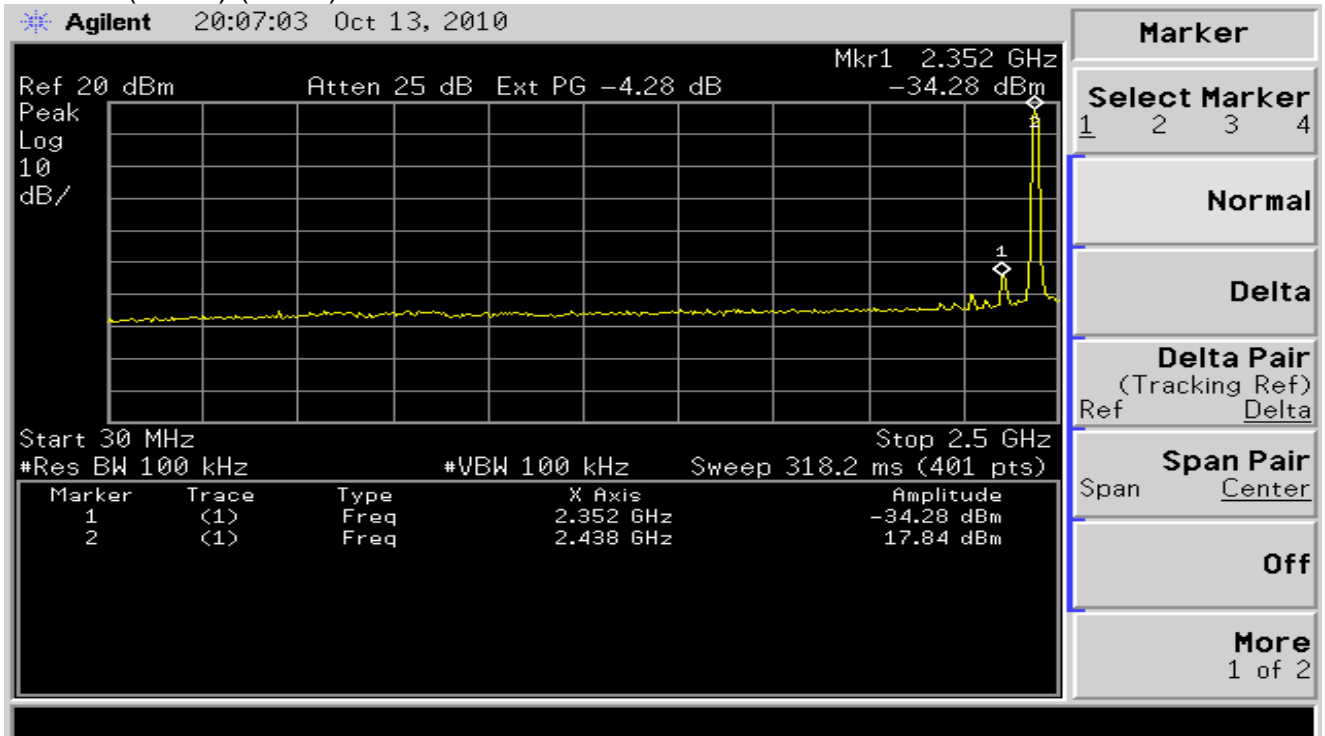


802.11b (CH06) (2 of 2)

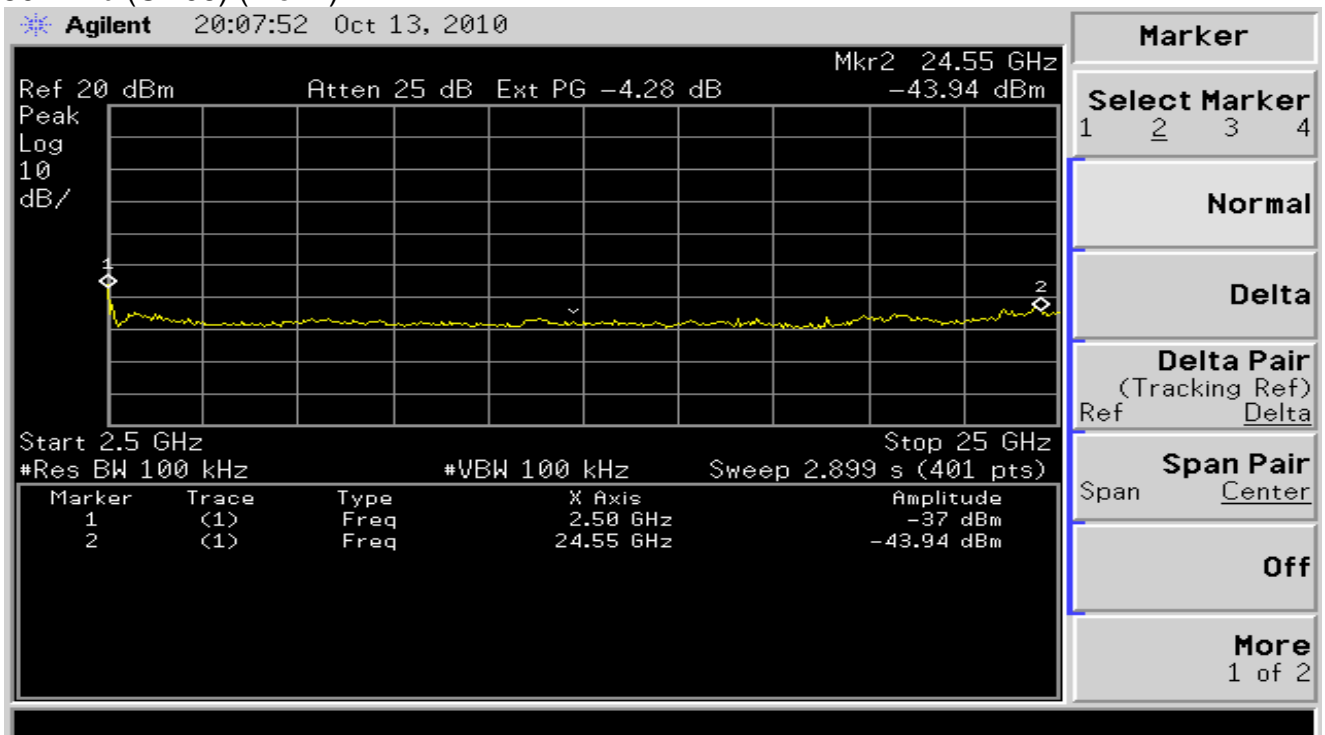

802.11b (CH11) (1 of 2)

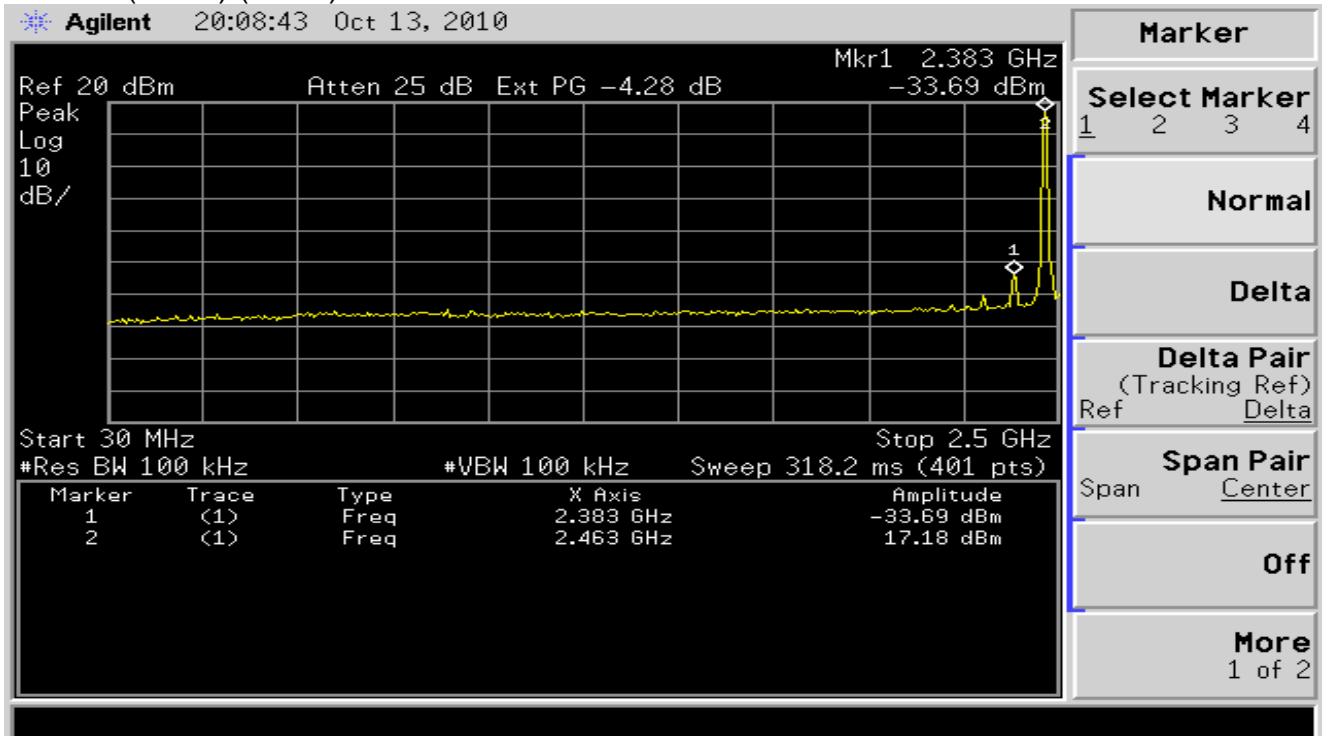


802.11b (CH11) (2 of 2)

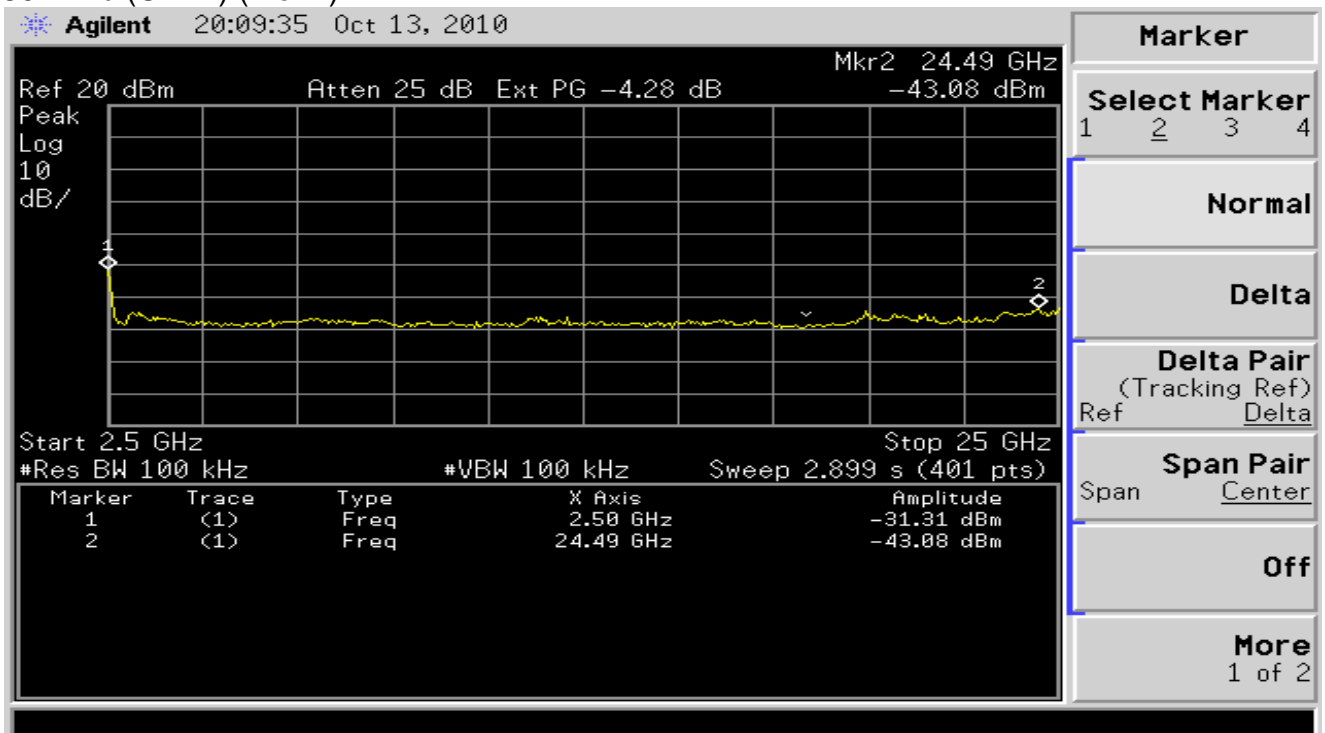





802.11g (CH01) (1 of 2)

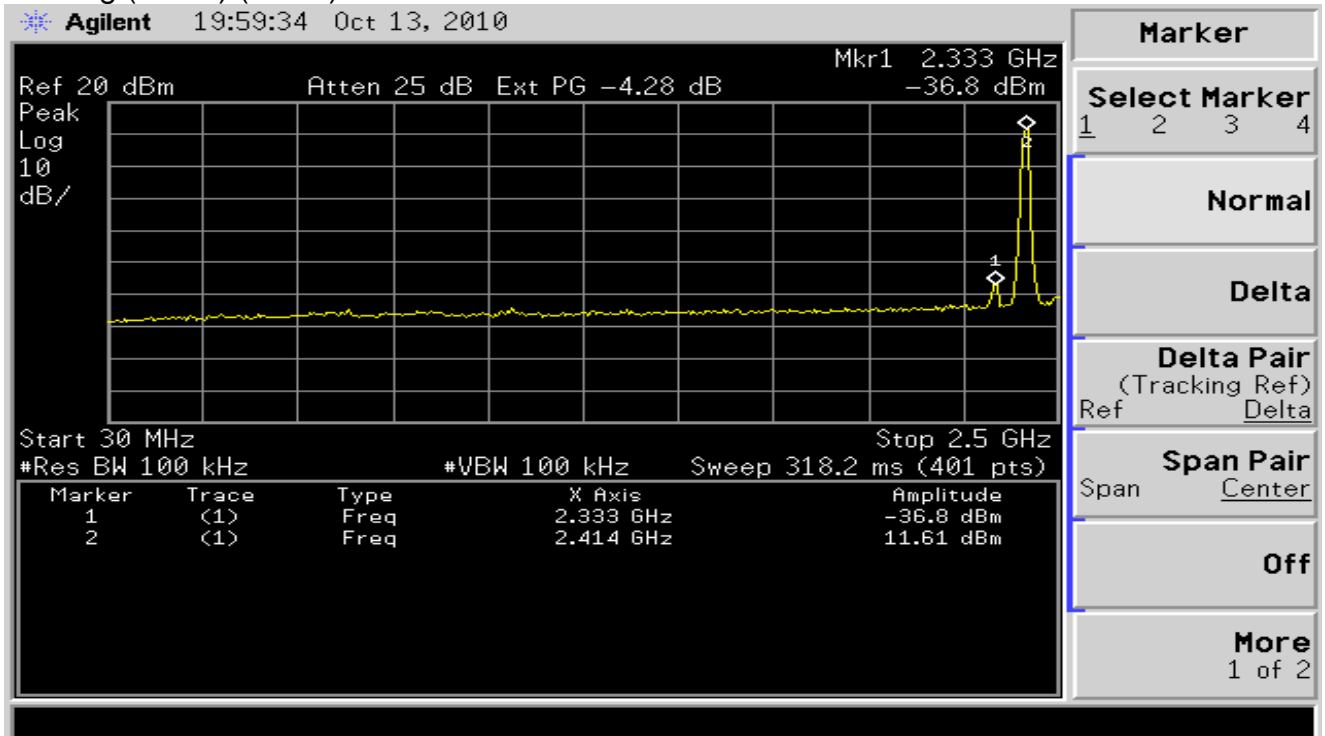


802.11g (CH01) (2 of 2)

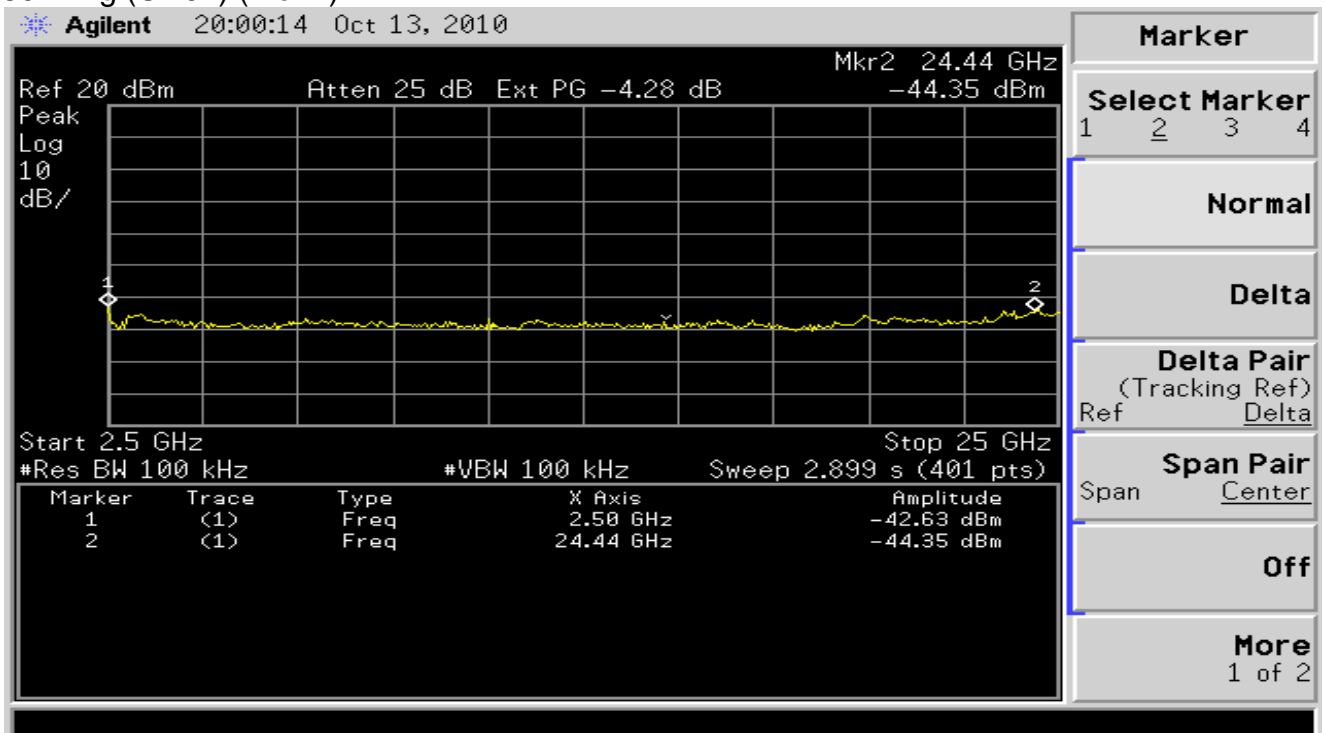


802.11g (CH06) (1 of 2)

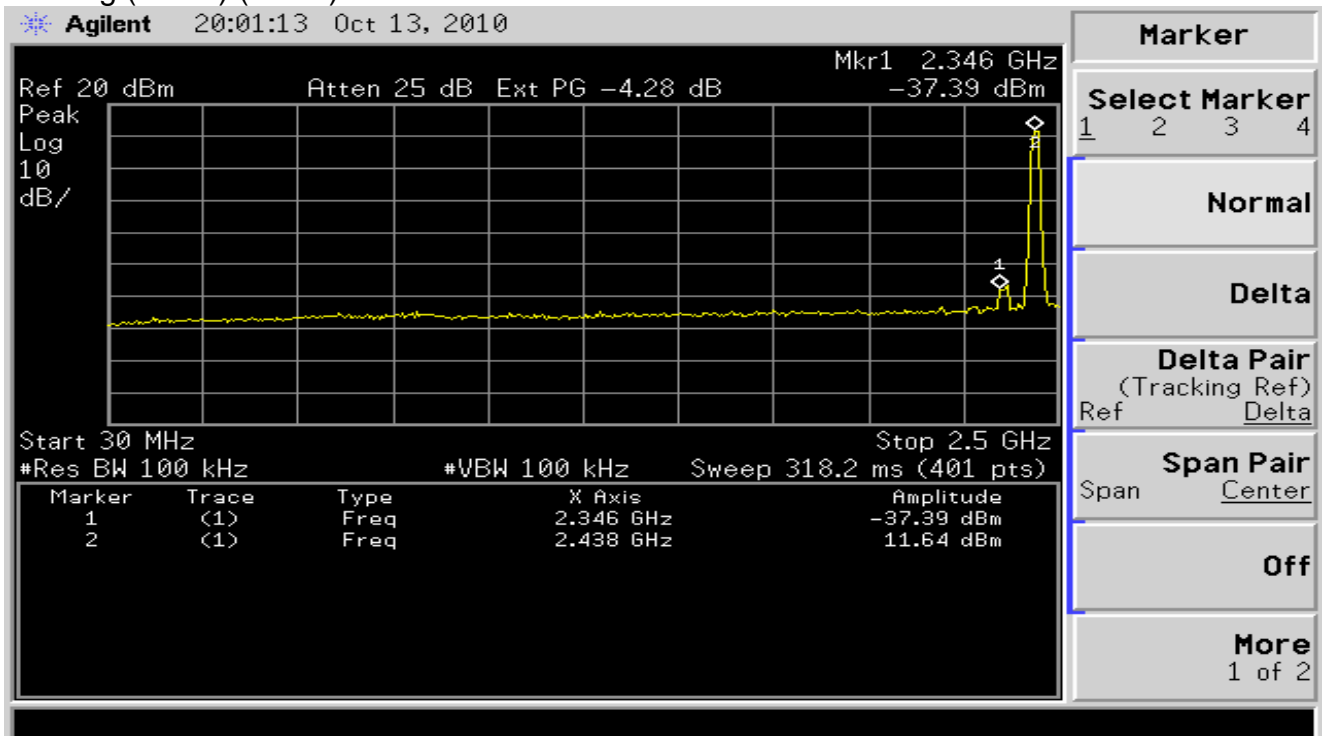


802.11g (CH06) (2 of 2)

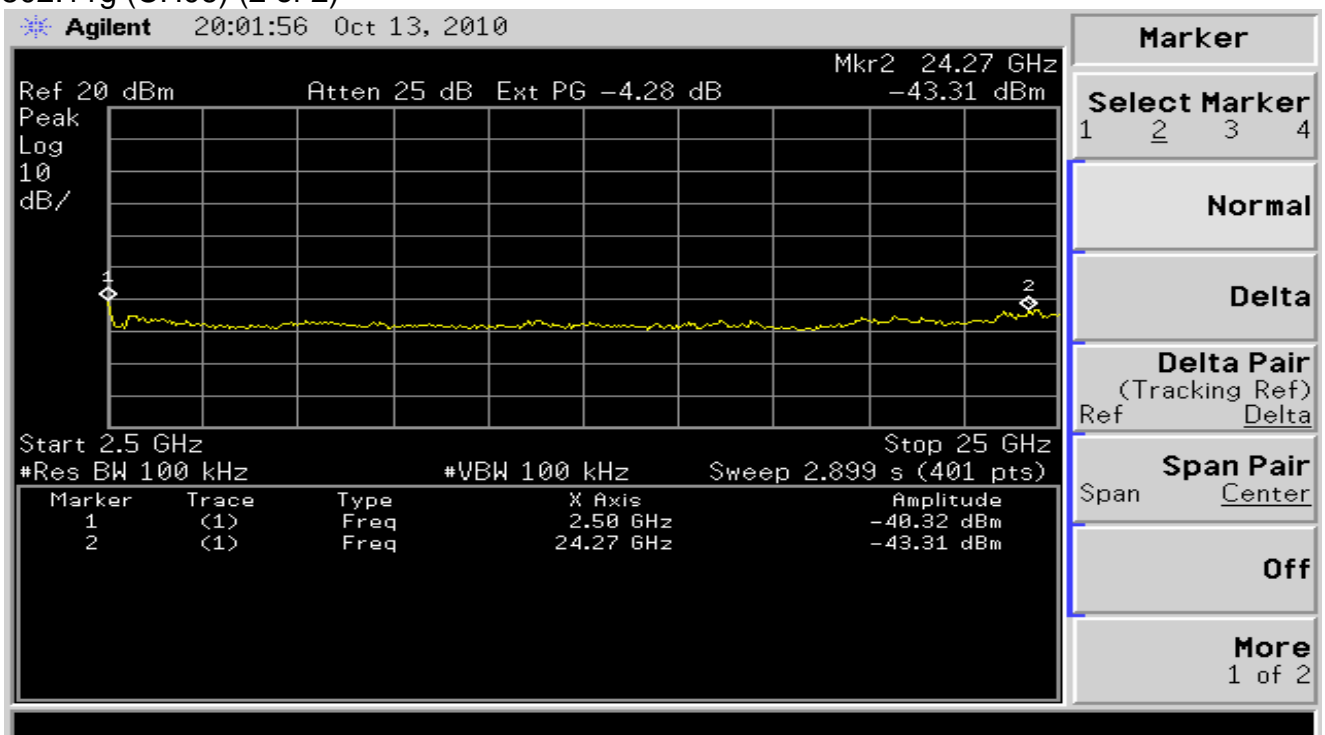


802.11g (CH11) (1 of 2)

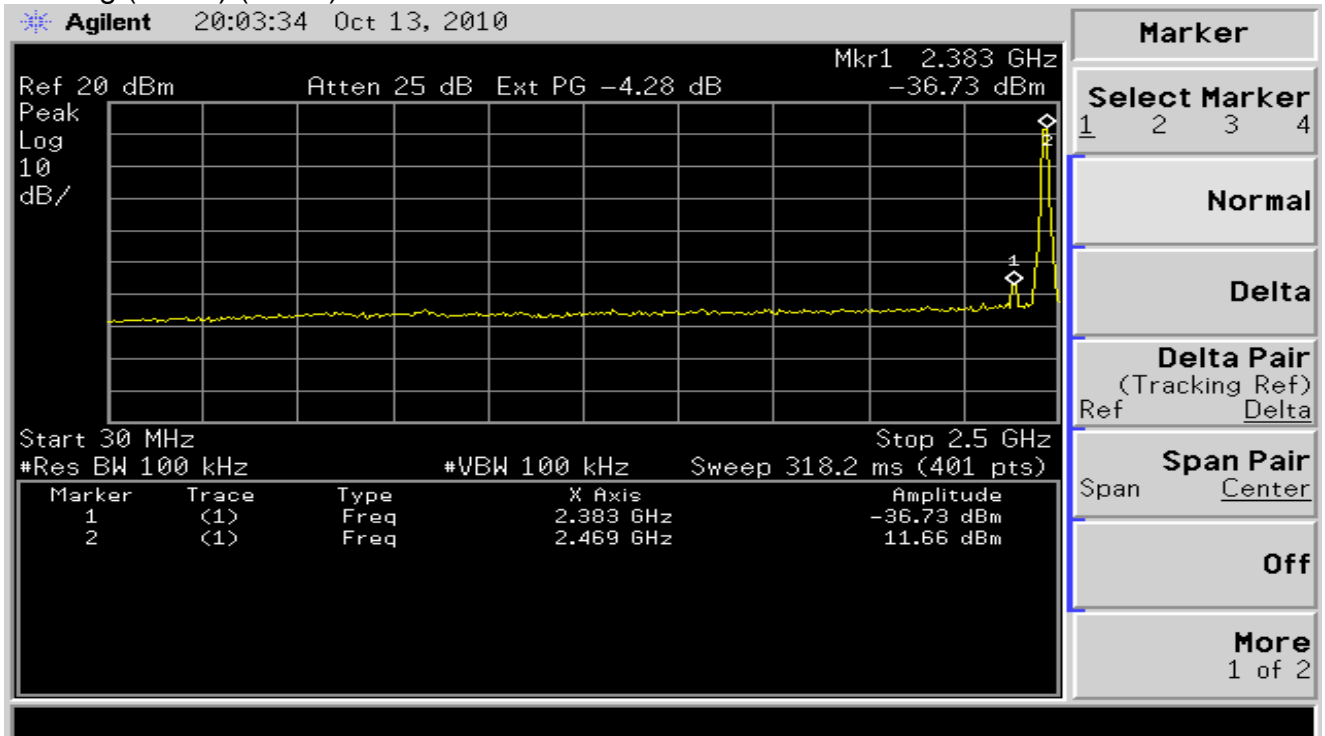


802.11g (CH11) (2 of 2)

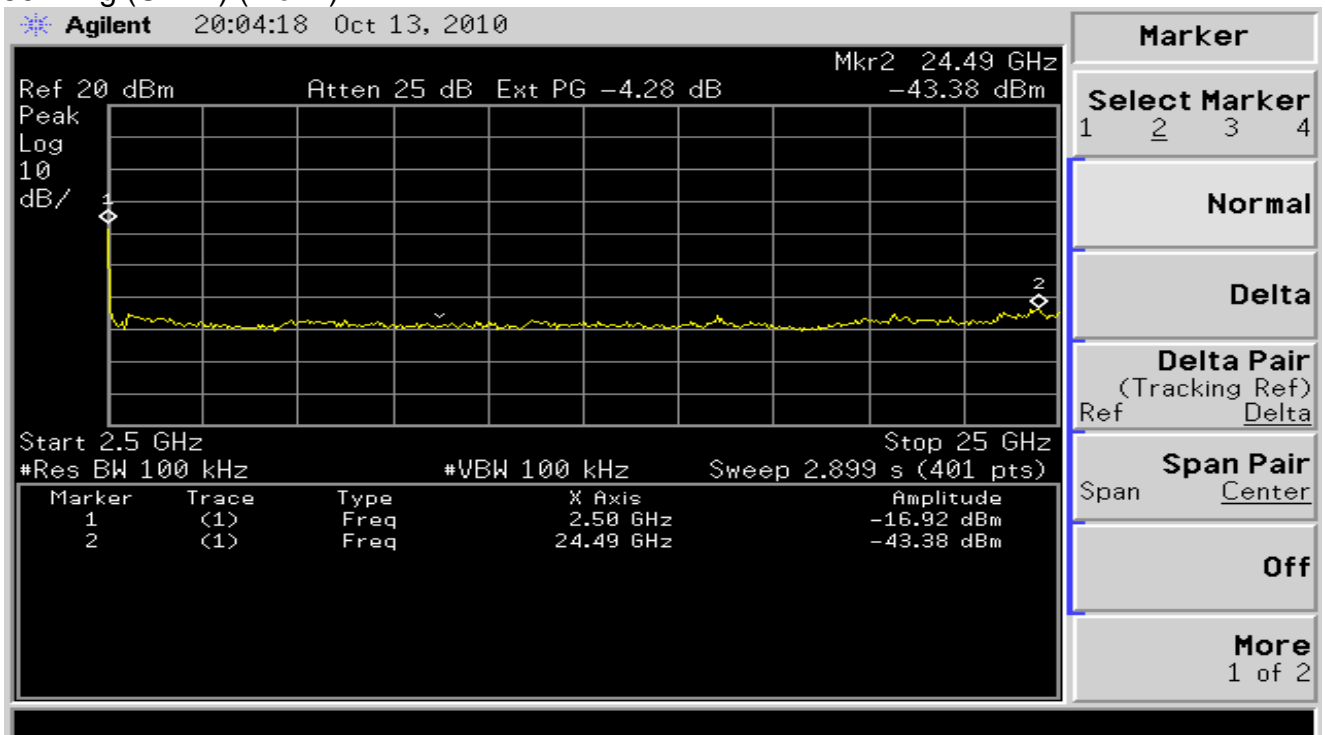


802.11n HT20 (Ant 1)(CH01) (1 of 2)

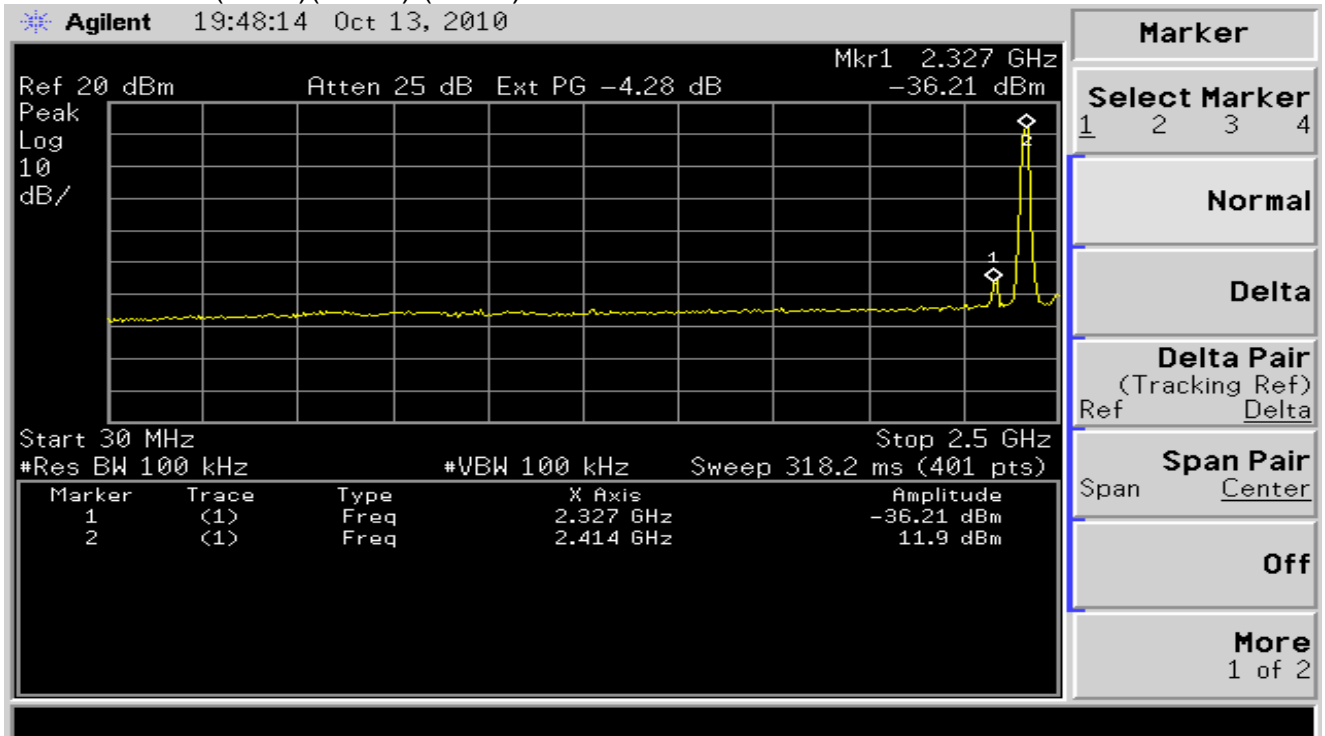


802.11n HT20 (Ant 1)(CH01) (1 of 2)

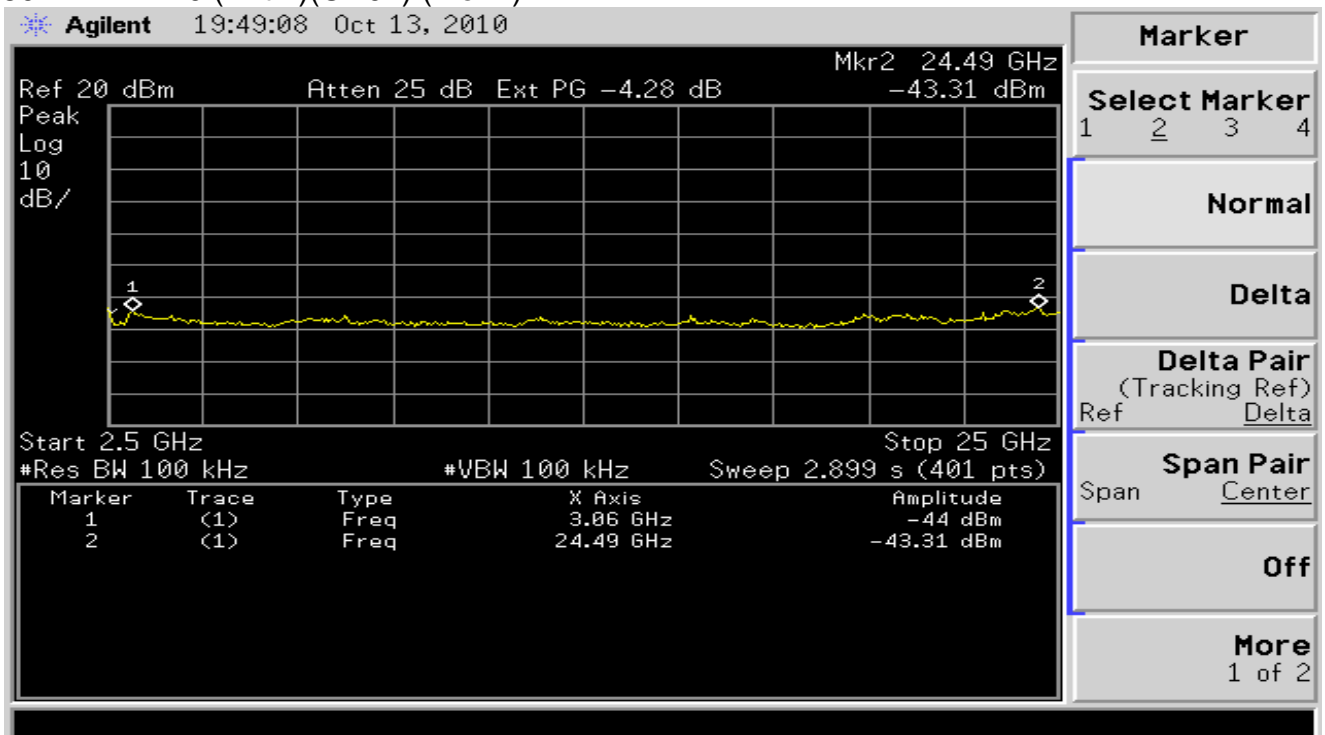


802.11n HT20 (Ant 1)(CH06) (1 of 2)

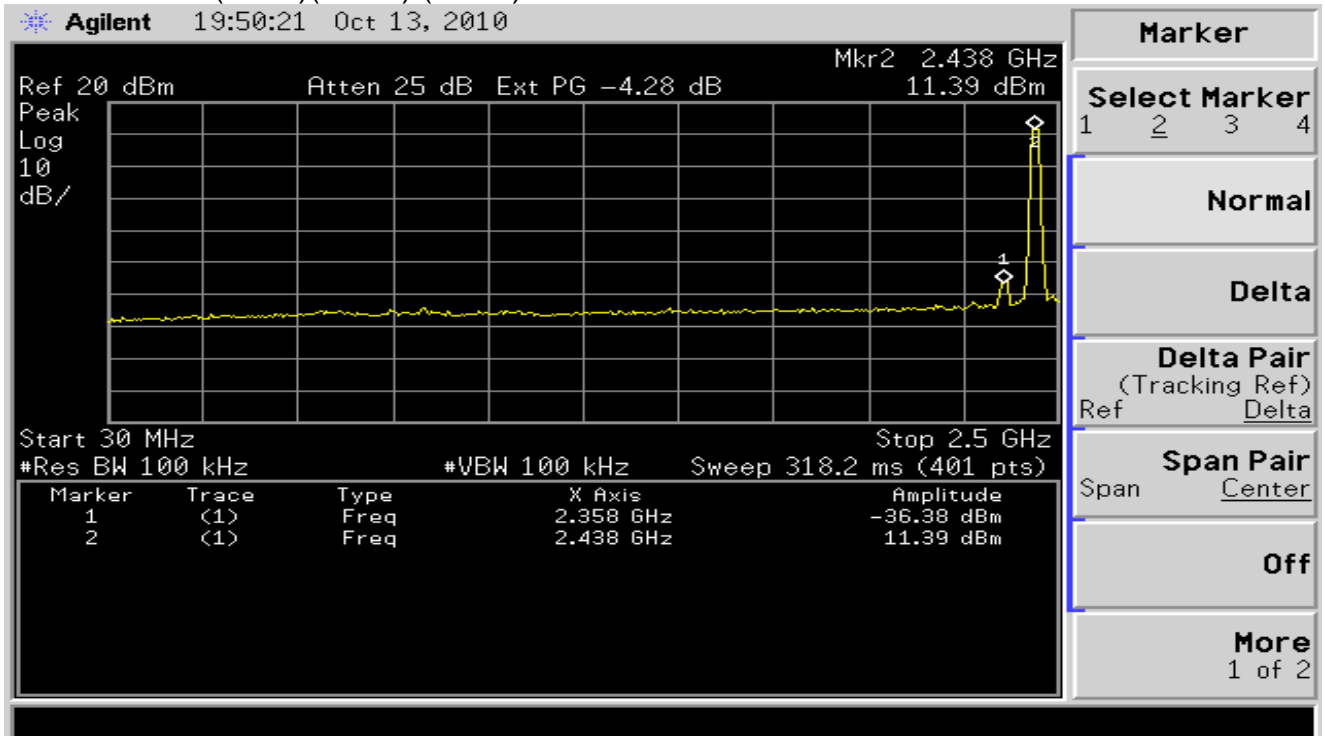


802.11n HT20 (Ant 1)(CH06) (2 of 2)

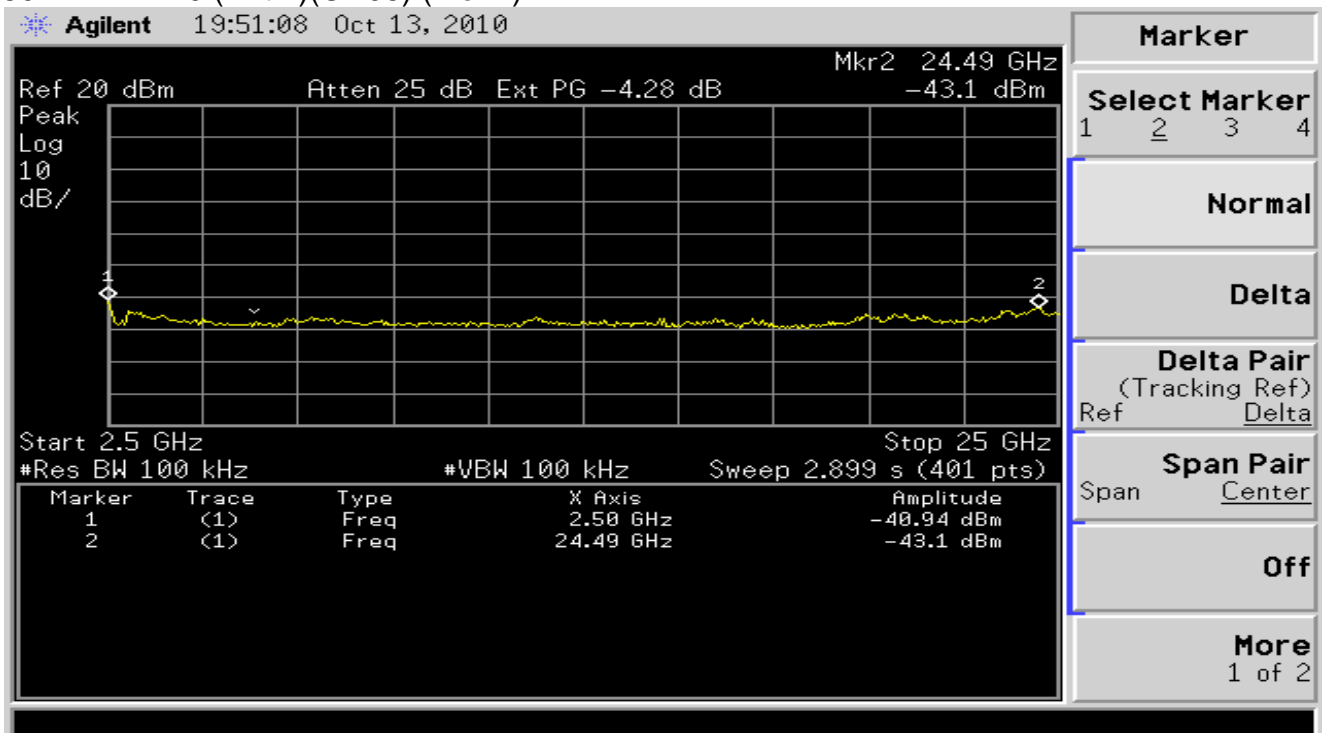


802.11n HT20 (Ant 1)(CH11) (1 of 2)

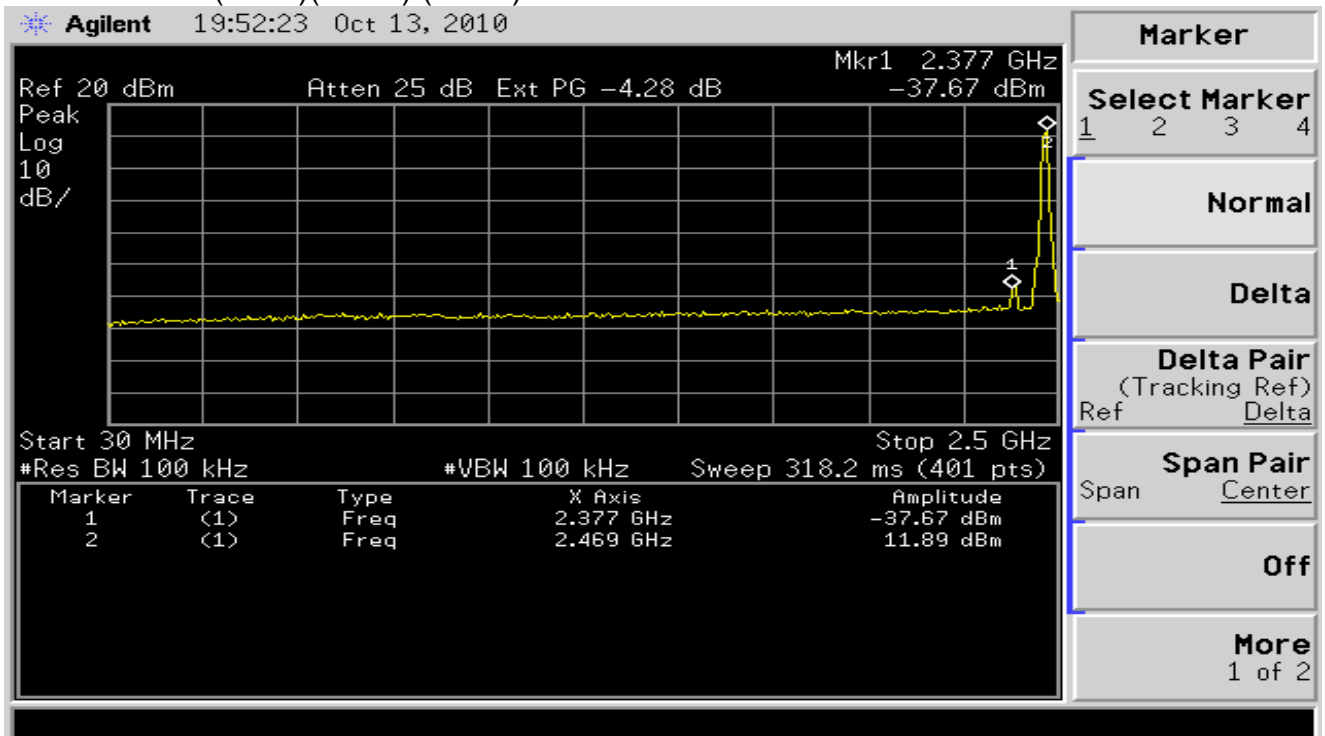


802.11n HT20 (Ant 1)(CH11) (2 of 2)

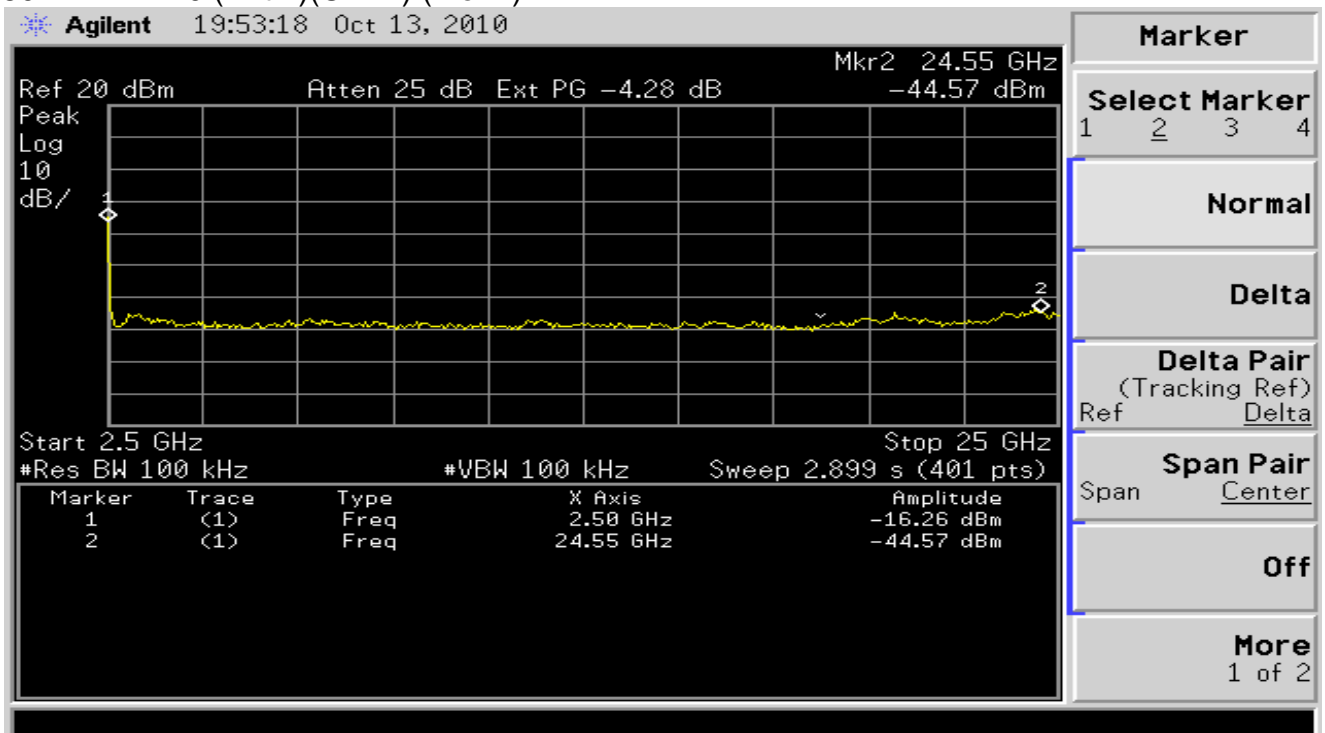


802.11n HT40 (Ant 1)(CH03) (1 of 2)

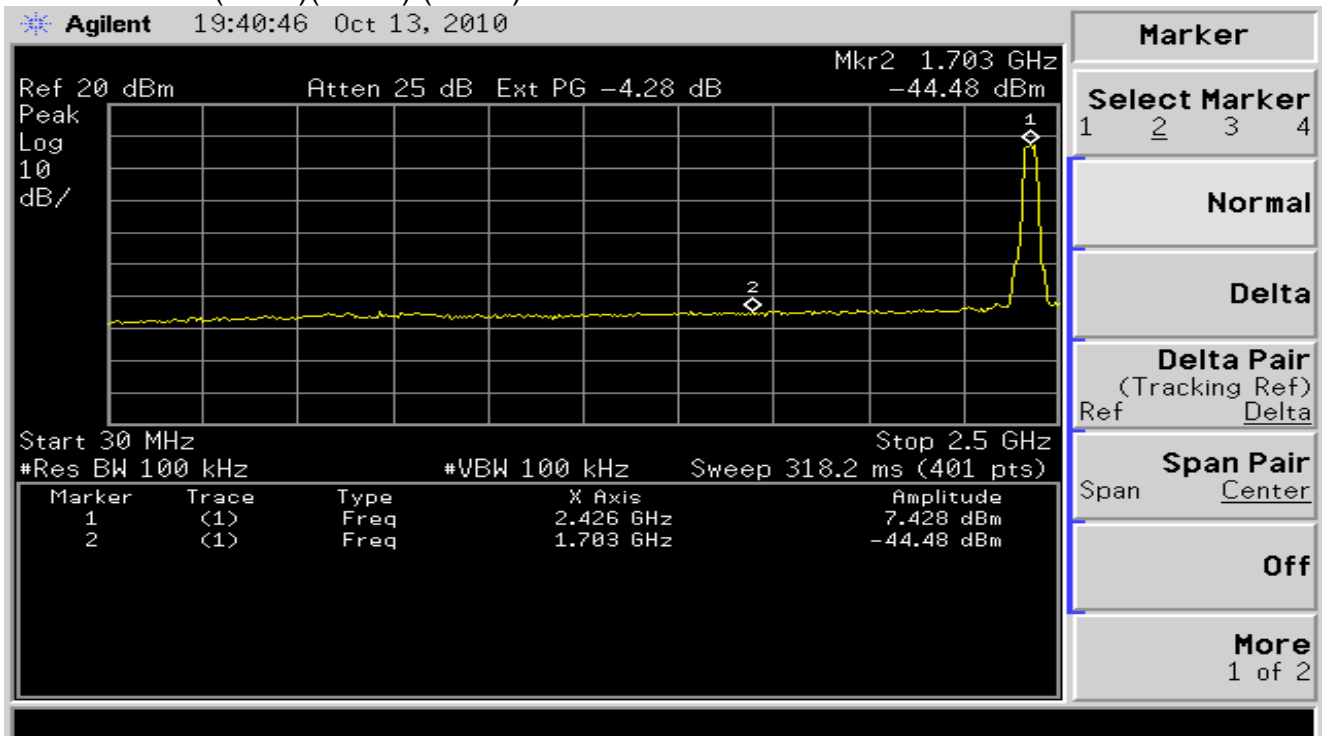


802.11n HT40 (Ant 1)(CH03) (2 of 2)

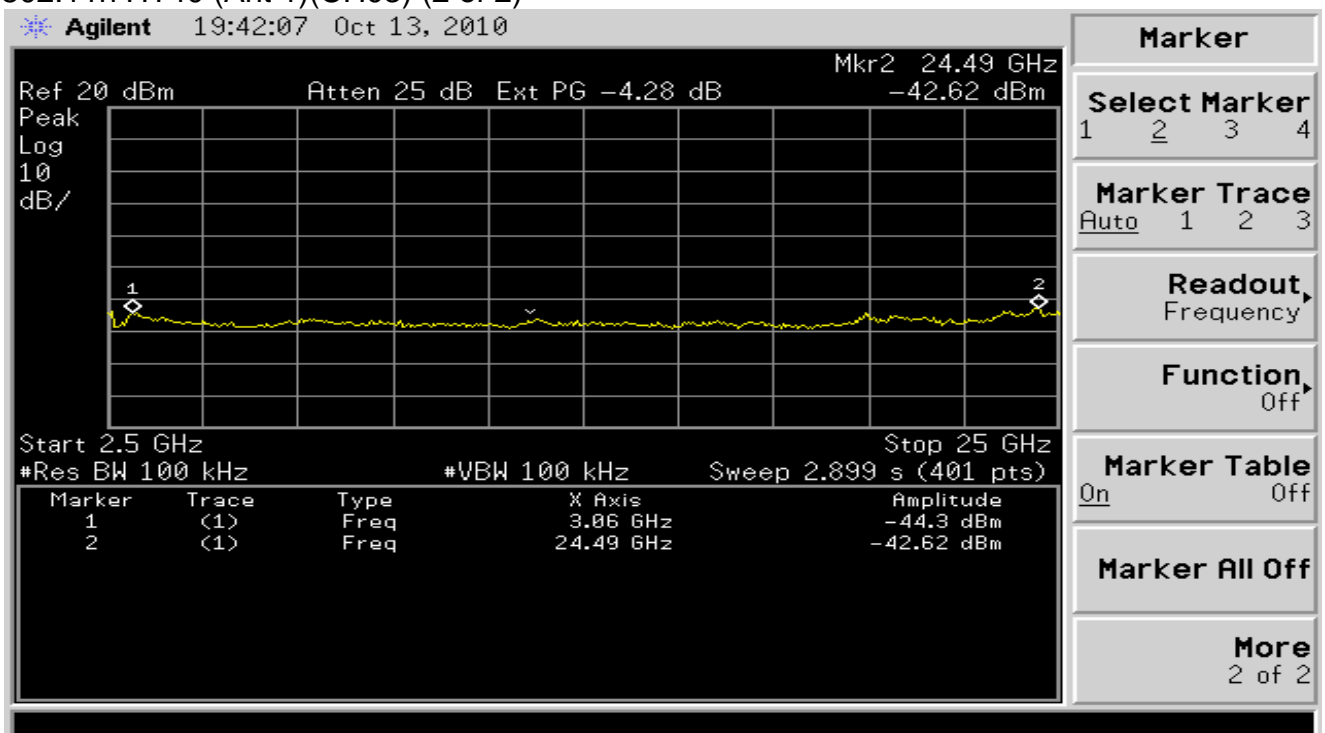

802.11n HT40 (Ant 1)(CH06) (1 of 2)

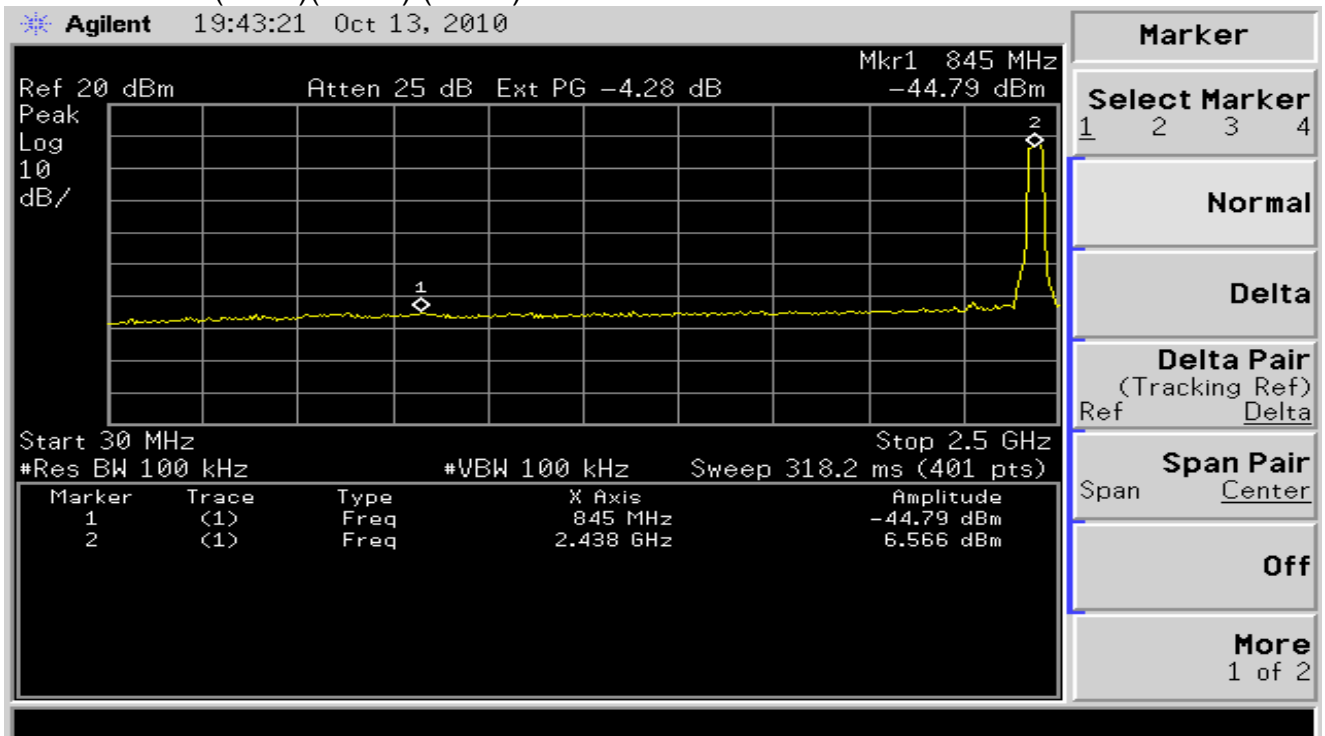


802.11n HT40 (Ant 1)(CH06) (2 of 2)

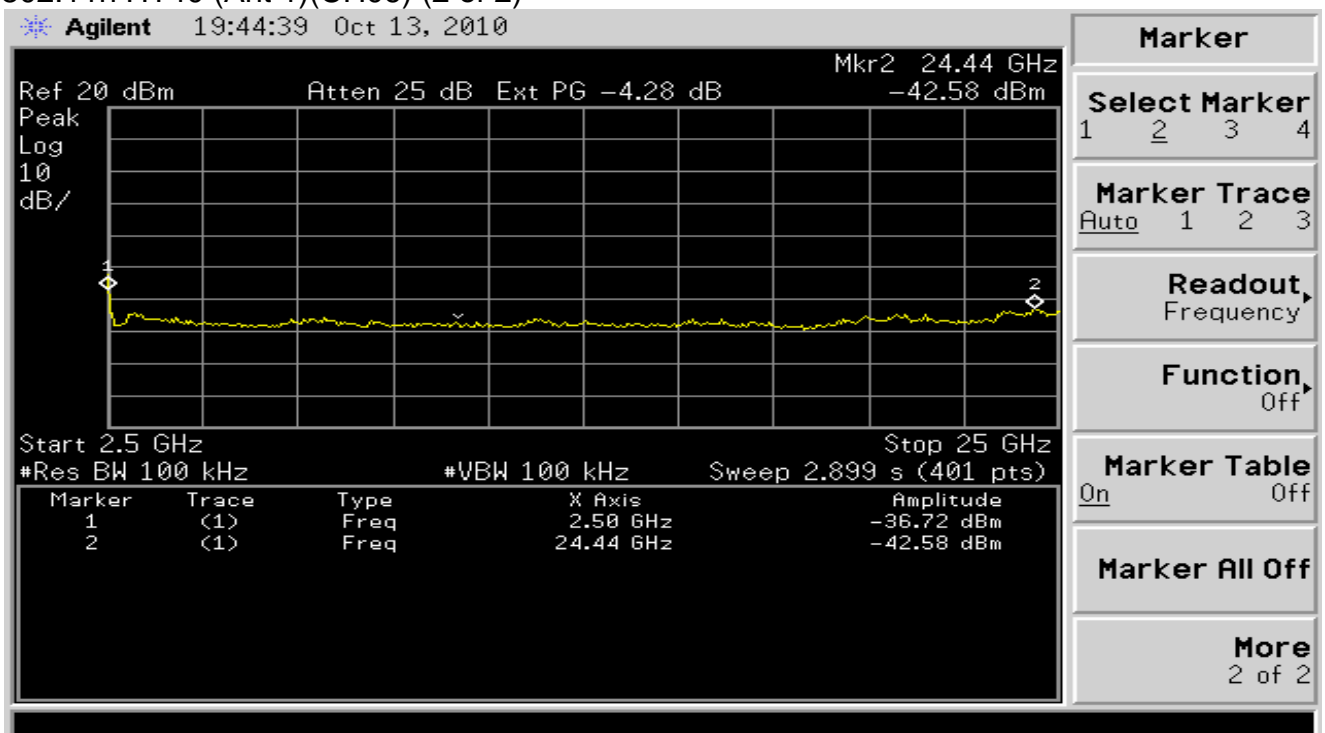





802.11n HT40 (Ant 1)(CH09) (1 of 2)

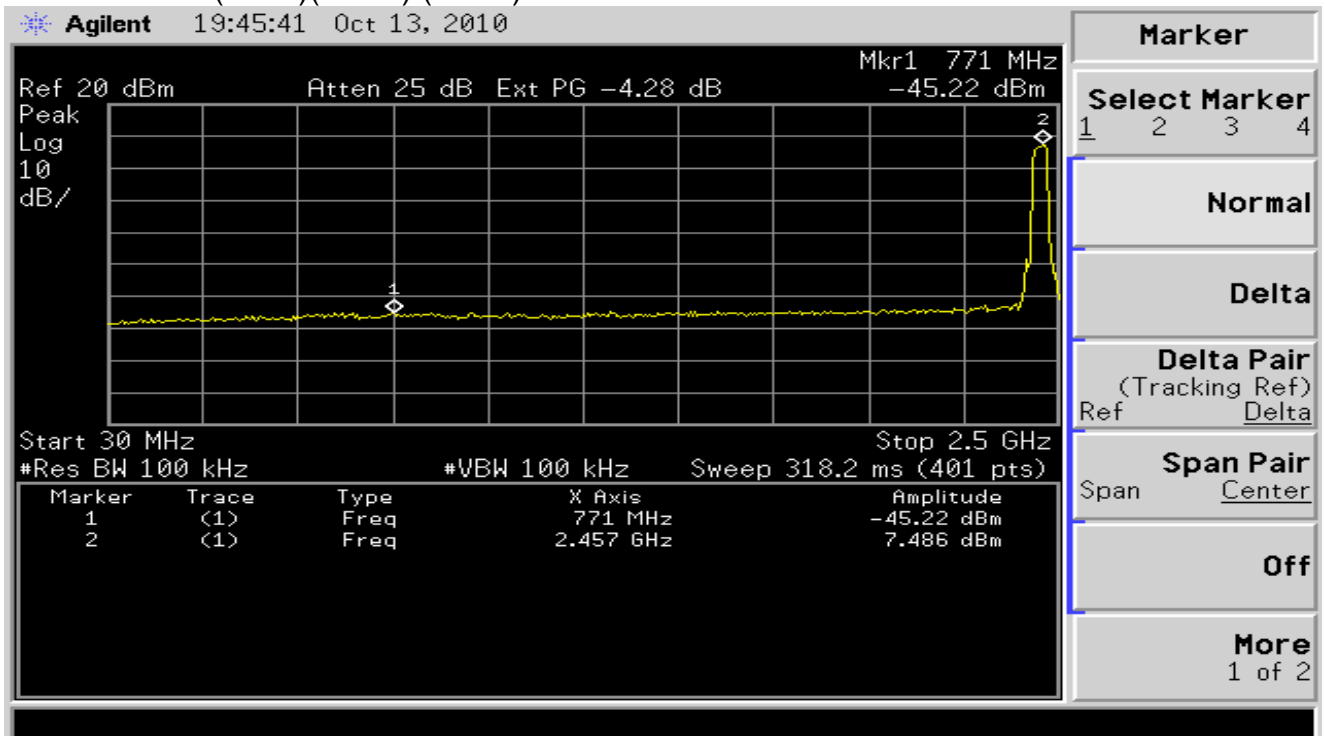


802.11n HT40 (Ant 1)(CH09) (2 of 2)

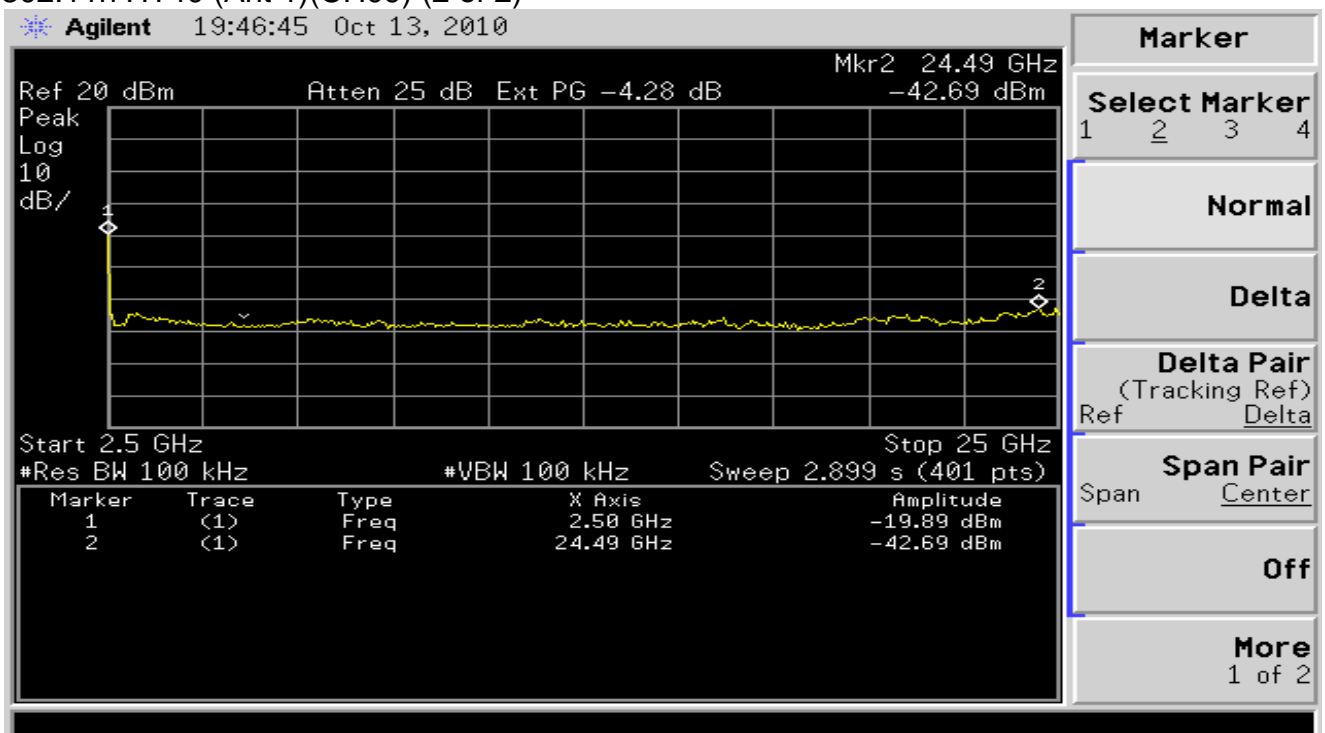


802.11n HT20 (Ant 2)(CH01) (1 of 2)

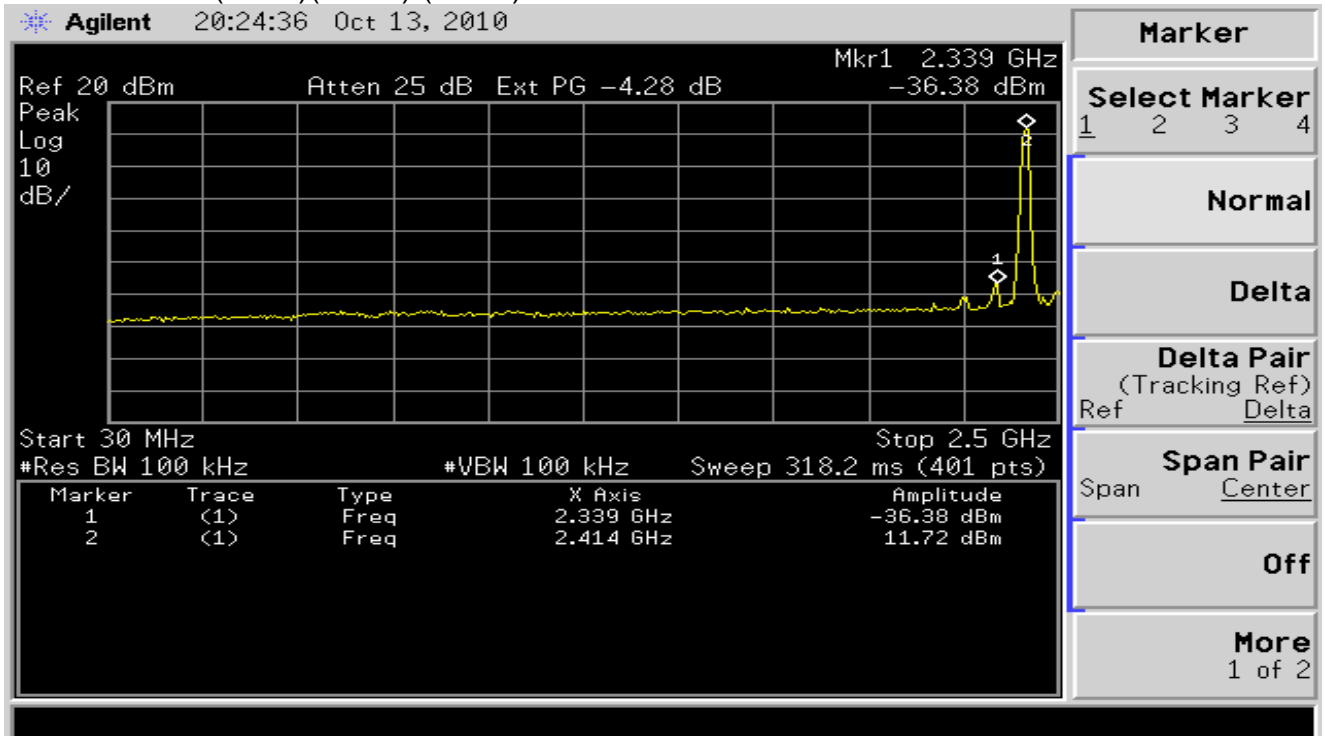


802.11n HT20 (Ant 2)(CH01) (2 of 2)

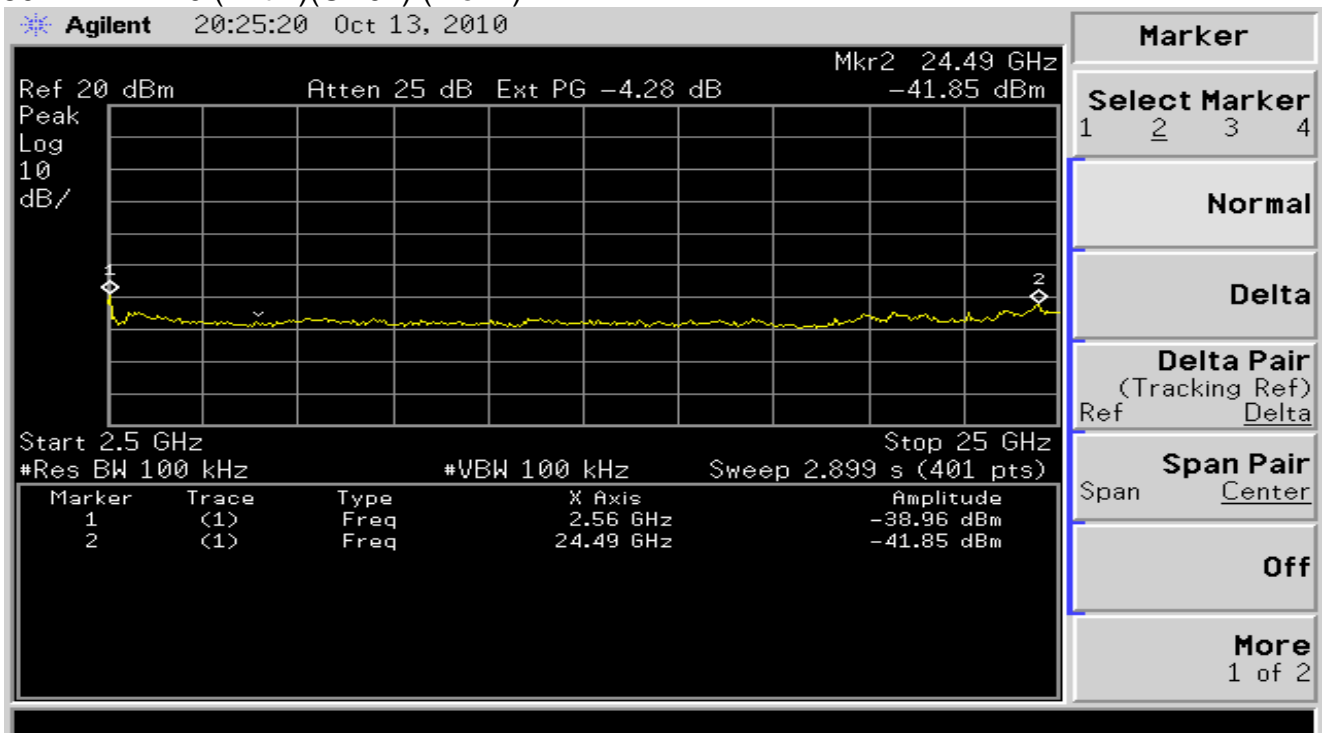


802.11n HT20 (Ant 2)(CH06) (1 of 2)

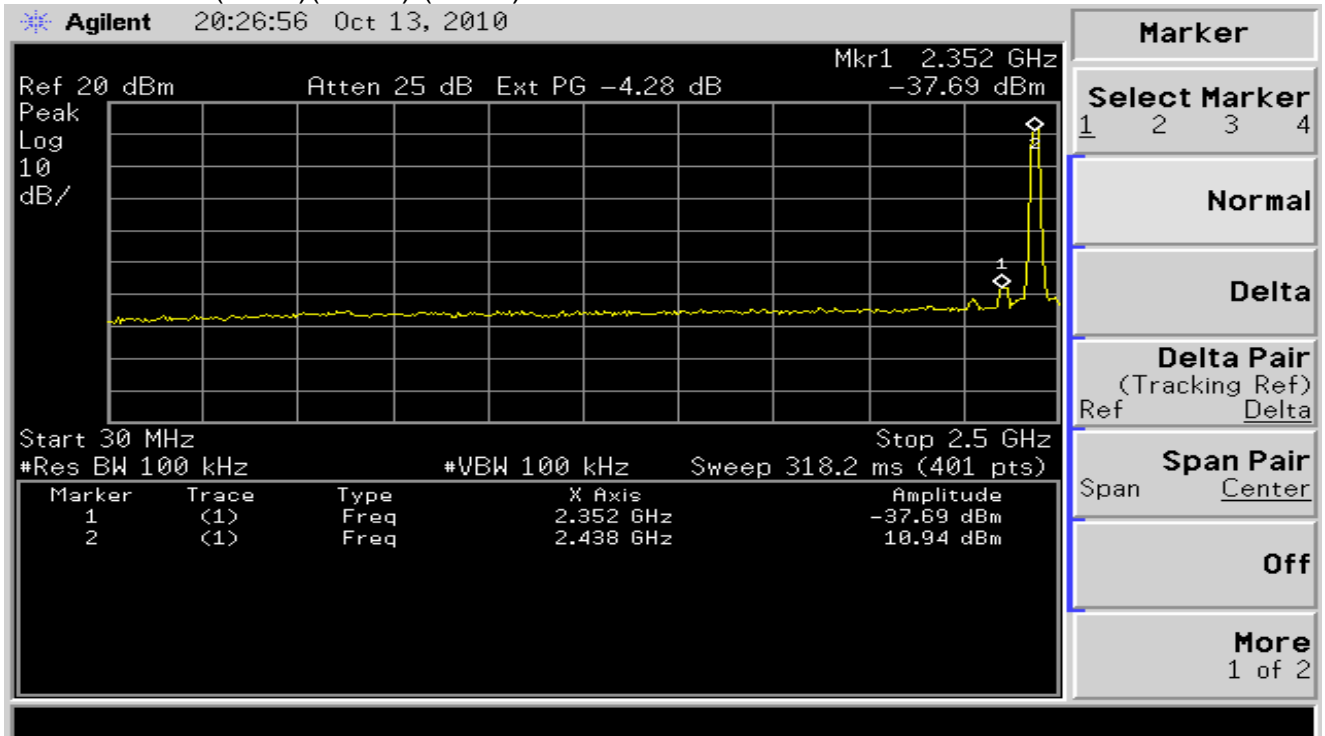


802.11n HT20 (Ant 2)(CH06) (2 of 2)

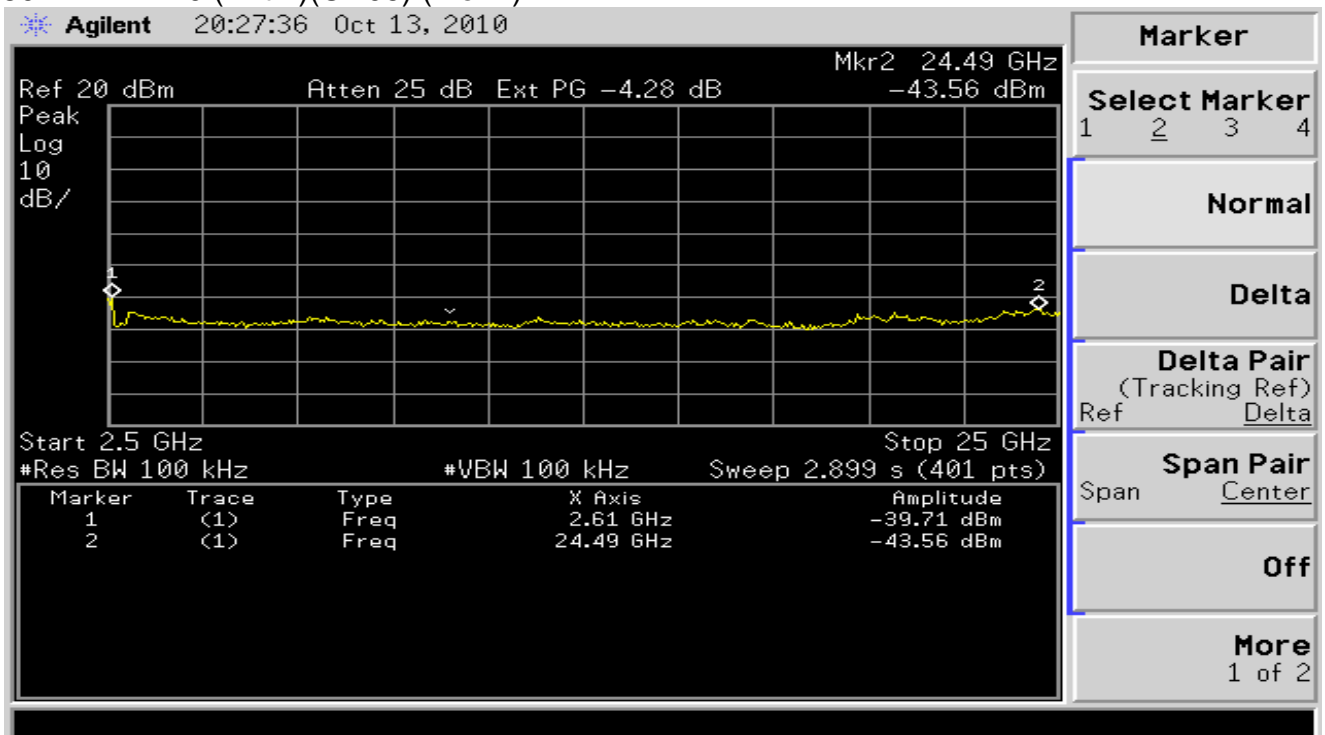


802.11n HT20 (Ant 2)(CH11) (1 of 2)

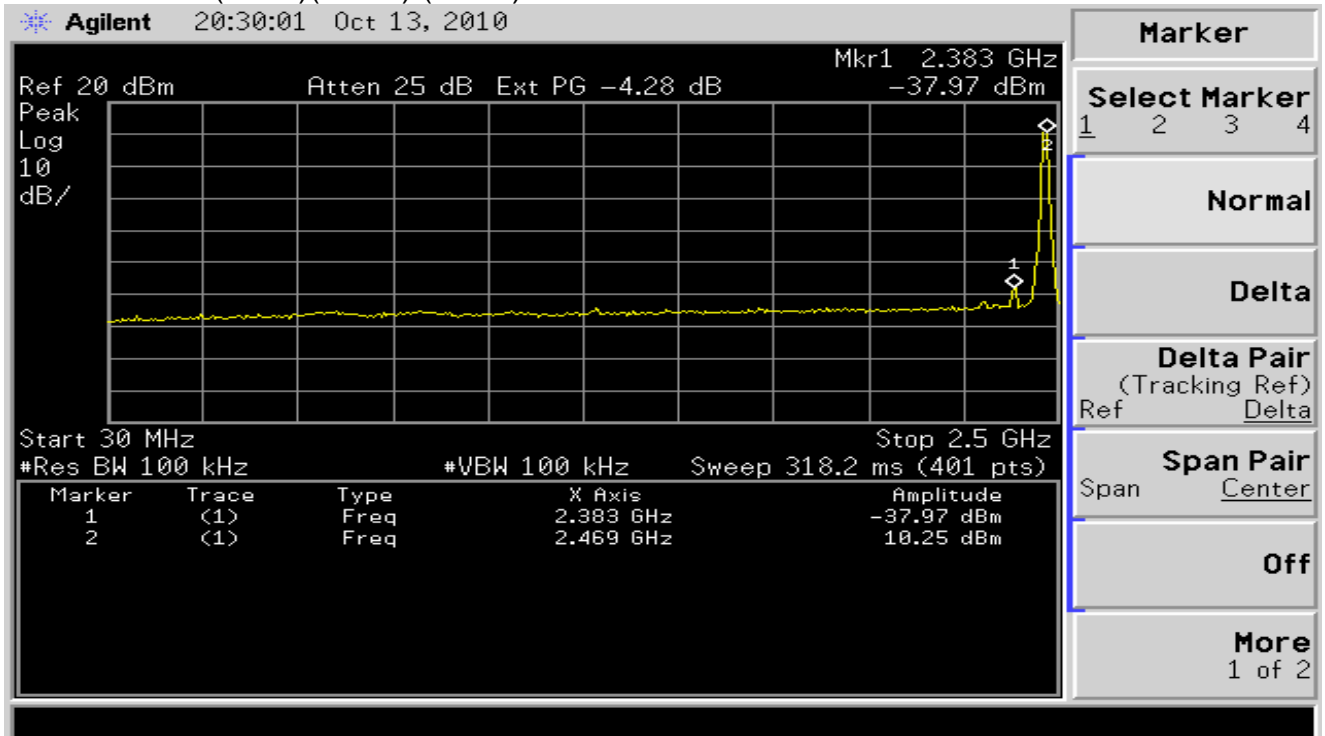


802.11n HT20 (Ant 2)(CH11) (2 of 2)

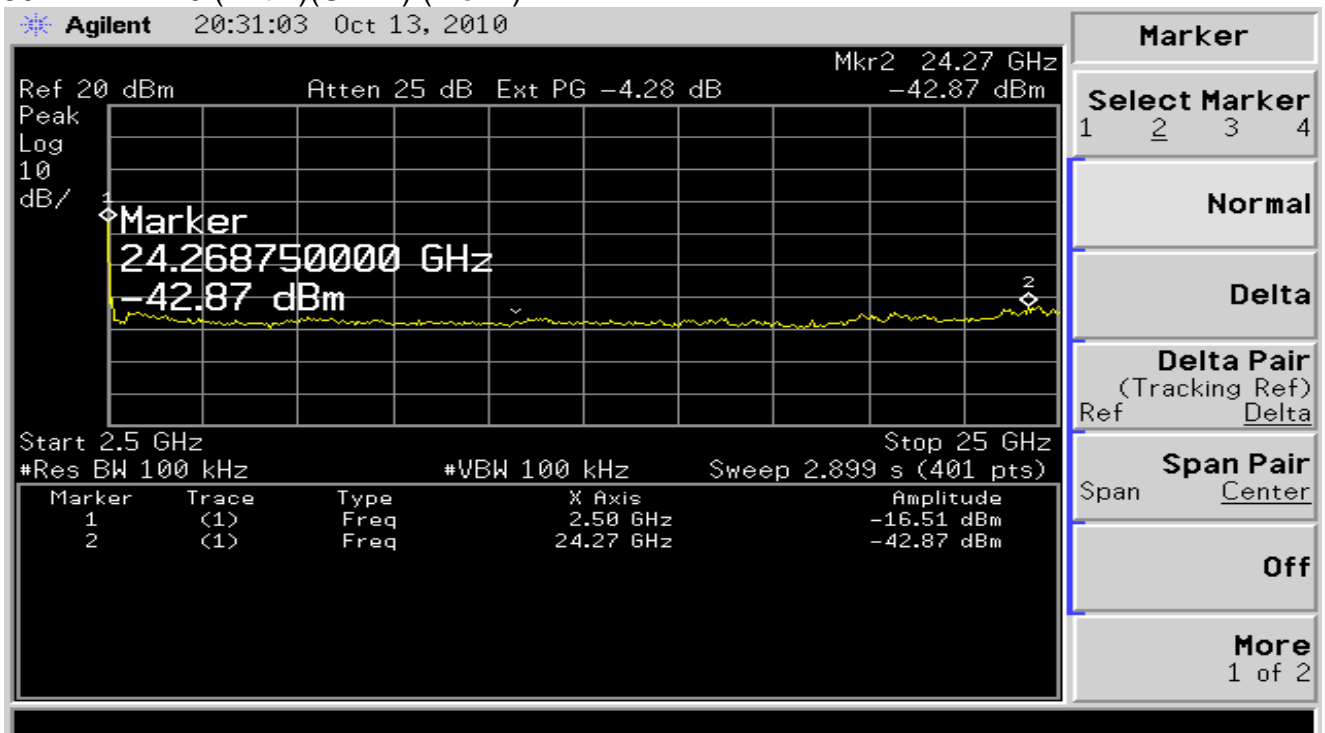


802.11n HT40 (Ant 2)(CH03) (1 of 2)

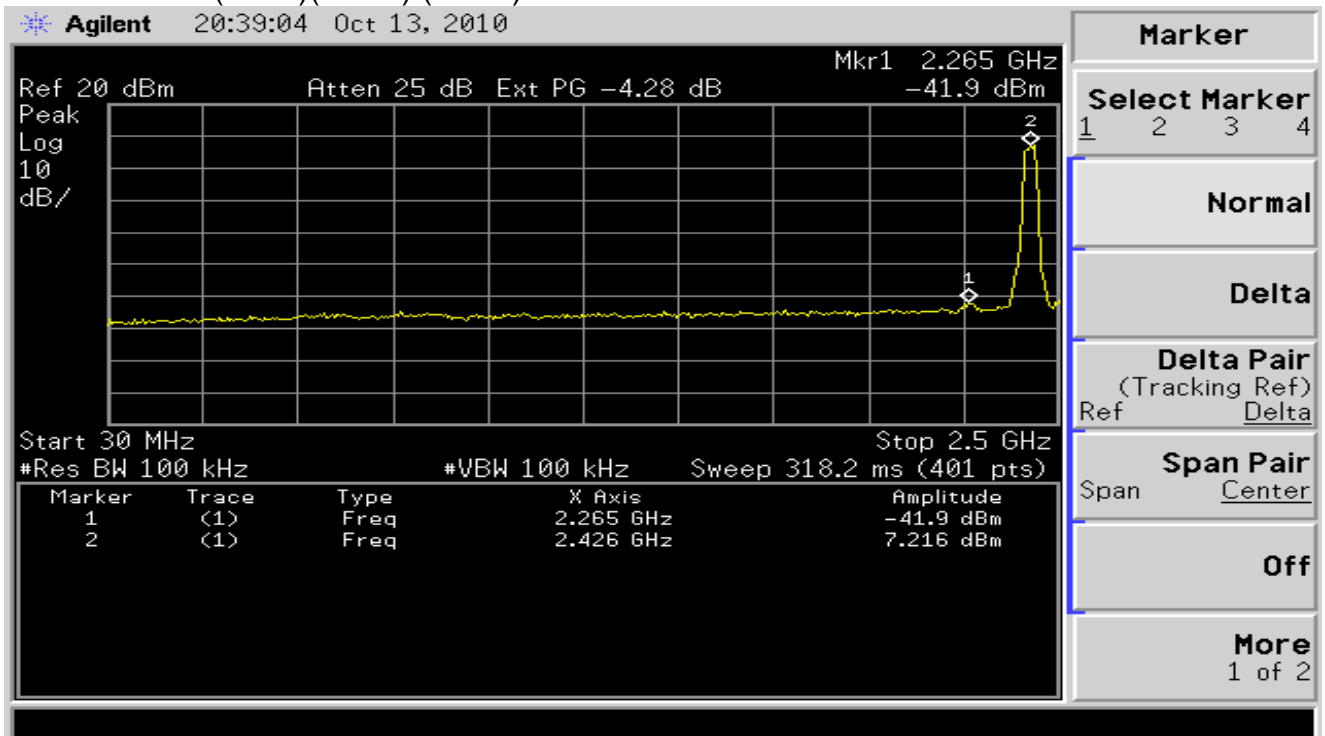


802.11n HT40 (Ant 2)(CH03) (2 of 2)

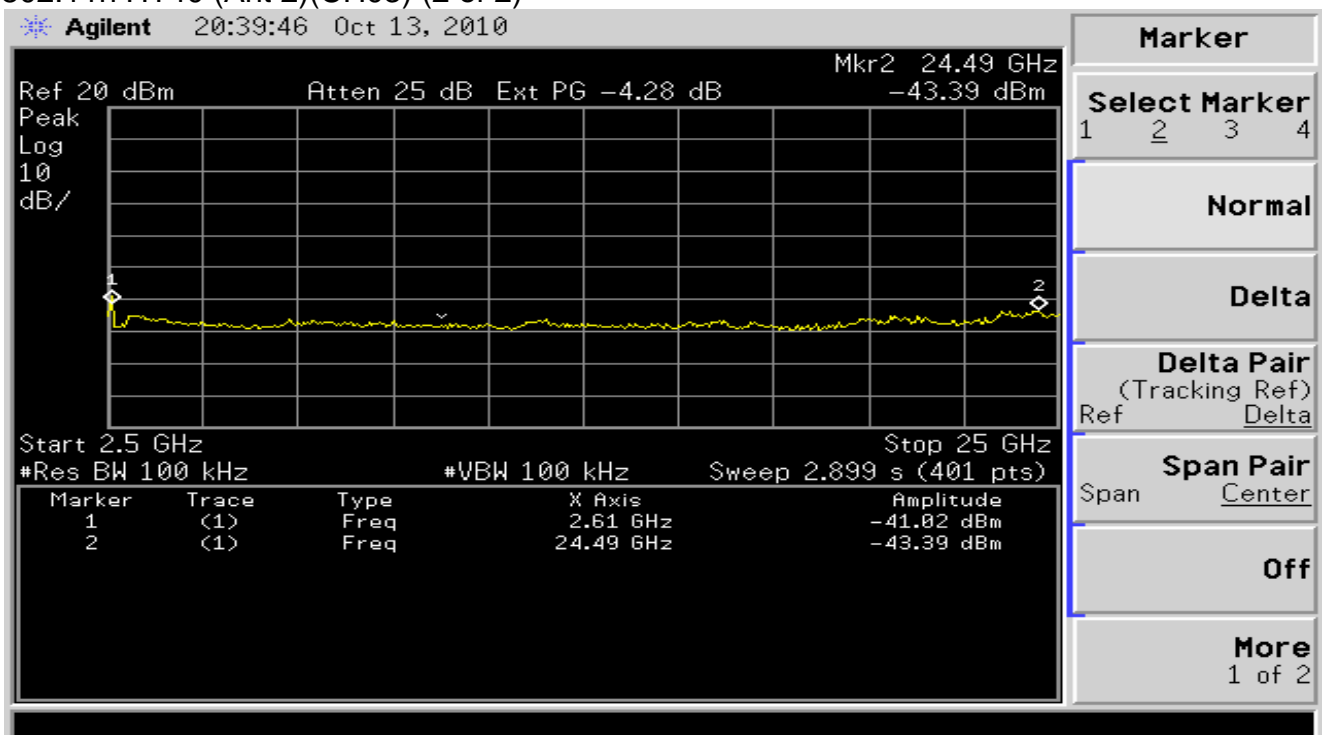


802.11n HT40 (Ant 2)(CH06) (1 of 2)

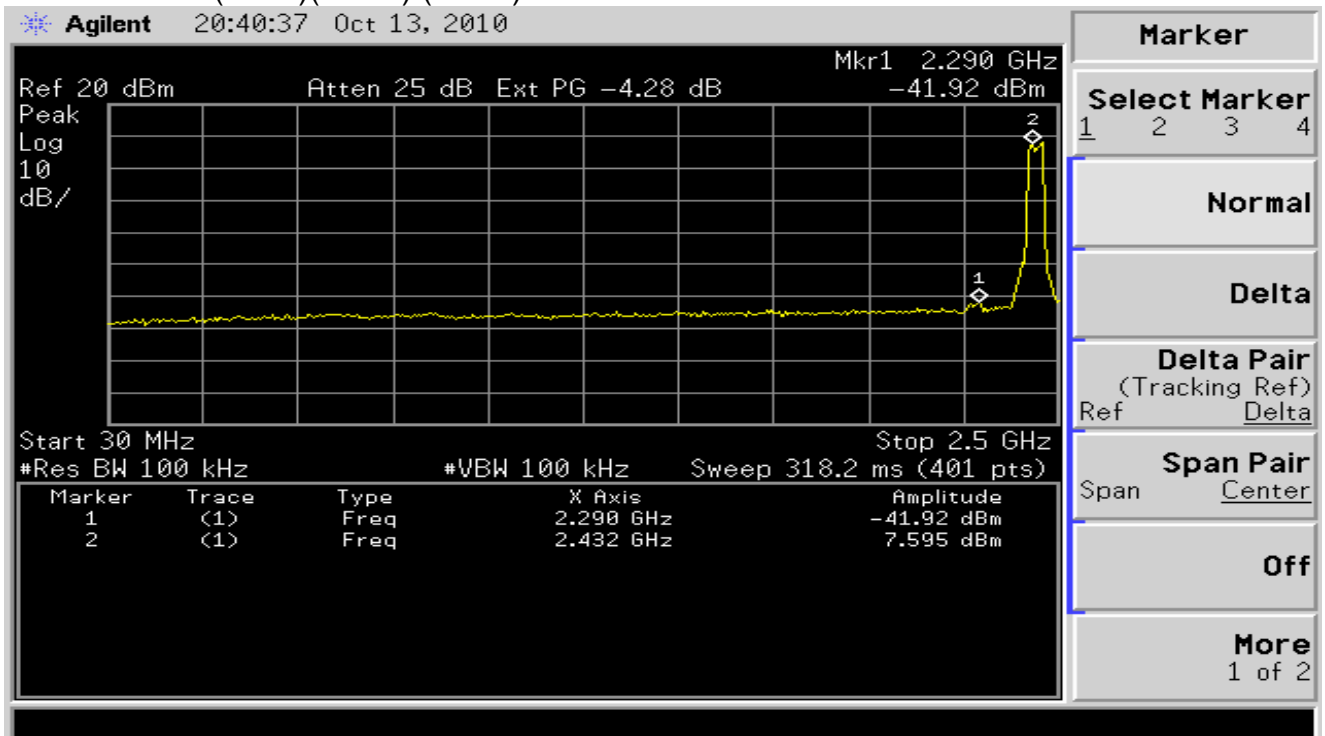


802.11n HT40 (Ant 2)(CH06) (2 of 2)

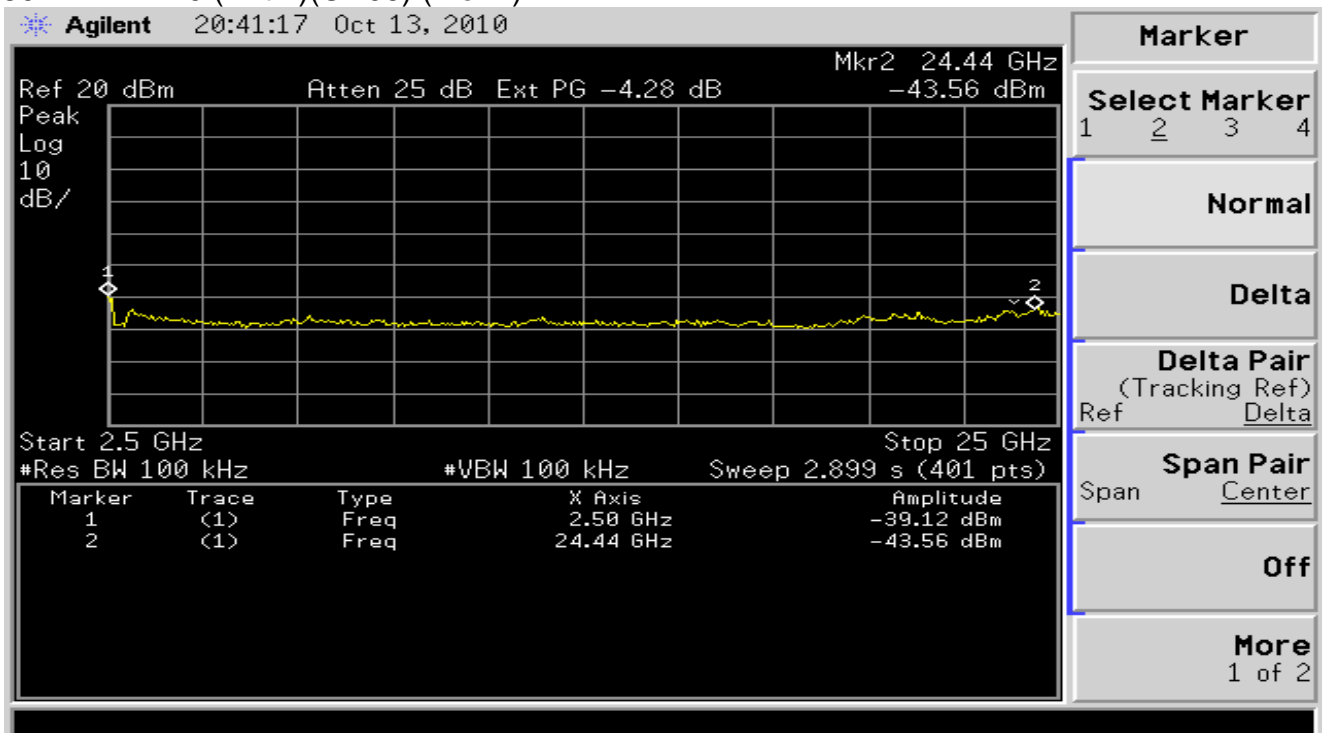

802.11n HT40 (Ant 2)(CH09) (1 of 2)

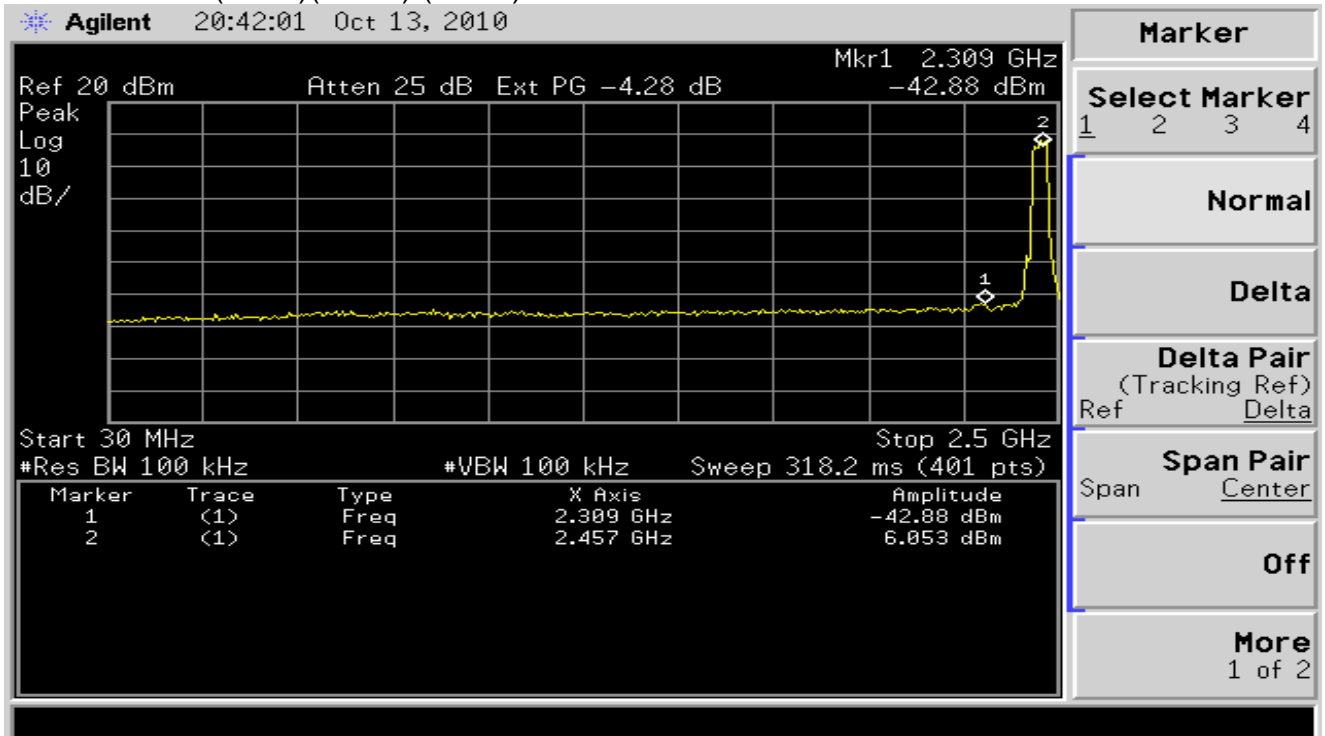

802.11n HT40 (Ant 2)(CH09) (2 of 2)

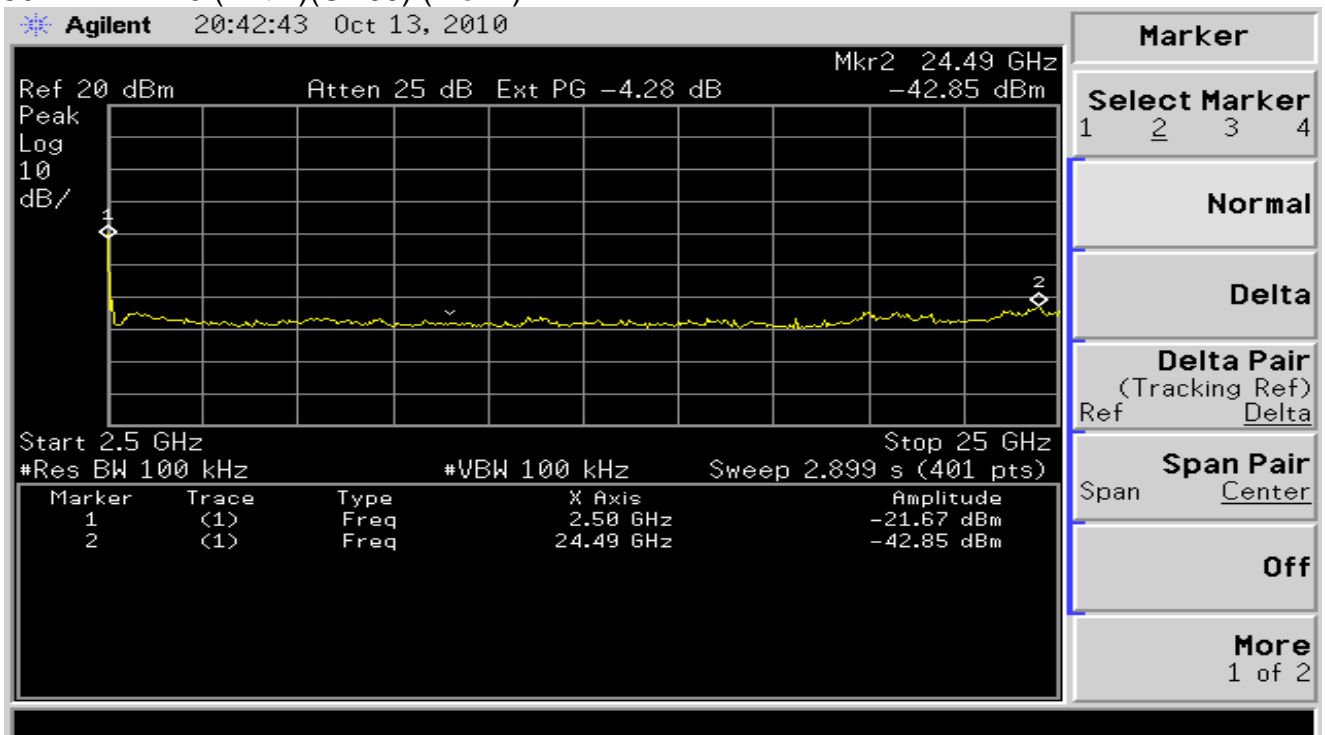


## 7. Band Edges Requirements

### 7.1 Test Condition & Setup :

According to 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 7.2 Test Instruments Configuration:

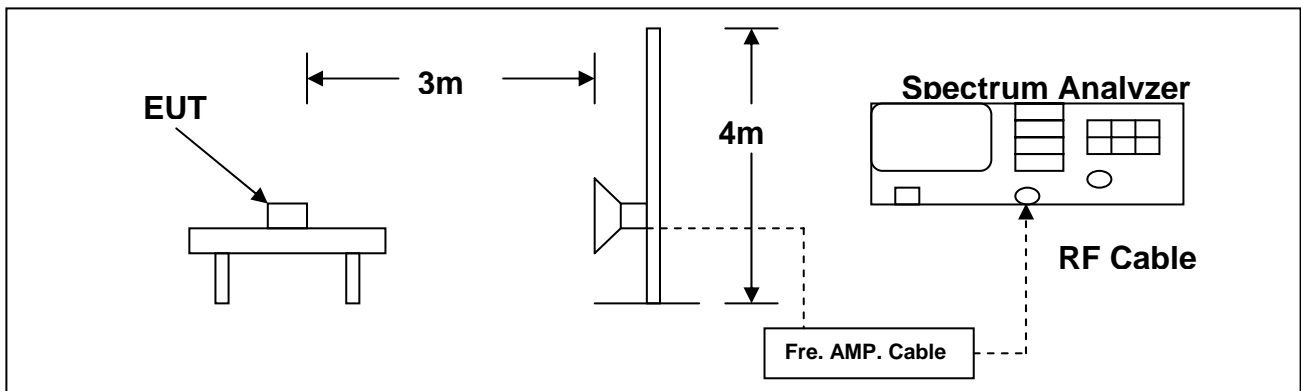

### 7.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cali. Date
1.	Agilent	Spectrum Analyzer	US44300422	E4446A	2010/05/28	2011/05/28
2.	MLT	Pre Amplifier	TA010-190-30	RF03	2010/07/24	2011/07/24
3.	SCHWARZBECK	Horn Antenna	304	BBHA 9120 D	2010/09/20	2011/09/20



## 7.4 Test Result :

(802.11b)

Radiated Emissions (HORIZONTAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2332.24	54.85 (PK)	1	200	0	74.00(PK)	-19.15
2332.24	47.86 (AV)	1	200	0	54.00(AV)	-6.14

Radiated Emissions (VERTICAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2331.60	65.10 (PK)	1	160	0	74.00(PK)	-8.90
2331.60	52.79 (AV)	1	160	0	54.00(AV)	-1.21
2388.24	56.99 (PK)	1	120	0	74.00(PK)	-17.01
2388.24	42.27 (AV)	1	120	0	54.00(AV)	-11.73

Radiated Emissions (HORIZONTAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2484.00	51.09 (PK)	1	310	0	74.00(PK)	-22.91

Radiated Emissions (VERTICAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2485.44	59.10 (PK)	1	220	0	74.00(PK)	-14.90
2485.44	43.31 (AV)	1	220	0	54.00(AV)	-10.69

**Notes :** 1.Margin= Amplitude - Limits

2.Height of table for EUT placed: 0.8 Meter.

3.ANT= Antenna height.

4.Duty= Duty cycle correction factor.

5. Amplitude= Reading Amplitude – Amplifier gain+ Cable loss+ Antenna factor  
(Auto calculate in spectrum analyzer)

## 7.5 Test Result :

(802.11g)

Radiated Emissions (HORIZONTAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2389.68	60.27 (PK)	1	180	0	74.00(PK)	-13.73
2389.68	41.55 (AV)	1	180	0	54.00(AV)	-12.45

Radiated Emissions (VERTICAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2327.04	62.54 (PK)	1	330	0	74.00(PK)	-11.46
2327.04	50.83 (AV)	1	330	0	54.00(AV)	-3.17
2389.68	72.95 (PK)	1	50	0	74.00(PK)	-1.05
2389.68	51.84 (AV)	1	50	0	54.00(AV)	-2.16

Radiated Emissions (HORIZONTAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2484.80	61.79 (PK)	1	180	0	74.00(PK)	-12.21
2484.80	42.14 (AV)	1	180	0	54.00(AV)	-11.86

Radiated Emissions (VERTICAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2484.80	71.88 (PK)	1	350	0	74.00(PK)	-2.12
2484.80	51.13 (AV)	1	350	0	54.00(AV)	-2.87

**Notes :** 1.Margin= Amplitude - Limits

2.Height of table for EUT placed: 0.8 Meter.

3.ANT= Antenna height.

4.Duty= Duty cycle correction factor.

5. Amplitude= Reading Amplitude – Amplifier gain+ Cable loss+ Antenna factor  
(Auto calculate in spectrum analyzer)

## 7.6 Test Result :

(802.11n HT20)

Radiated Emissions (HORIZONTAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2389.20	62.30 (PK)	1	260	0	74.00(PK)	-11.70
2389.20	41.21 (AV)	1	260	0	54.00(AV)	-12.79

Radiated Emissions (VERTICAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2327.44	62.93 (PK)	1	100	0	74.00(PK)	-11.07
2327.44	50.16 (AV)	1	100	0	54.00(AV)	-3.84
2389.60	72.98 (PK)	1	350	0	74.00(PK)	-1.02
2389.60	51.89 (AV)	1	350	0	54.00(AV)	-2.11

Radiated Emissions (HORIZONTAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2484.52	61.11 (PK)	1	210	0	74.00(PK)	-12.89
2484.52	43.20 (AV)	1	210	0	54.00(AV)	-10.80

Radiated Emissions (VERTICAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2485.20	71.50 (PK)	1	190	0	74.00(PK)	-2.50
2485.20	52.70 (AV)	1	190	0	54.00(AV)	-1.30

**Notes :** 1.Margin= Amplitude - Limits

2.Height of table for EUT placed: 0.8 Meter.

3.ANT= Antenna height.

4.Duty= Duty cycle correction factor.

5. Amplitude= Reading Amplitude – Amplifier gain+ Cable loss+ Antenna factor  
(Auto calculate in spectrum analyzer)

## 7.7 Test Result :

(802.11n HT40)

Radiated Emissions (HORIZONTAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2389.28	57.08 (PK)	1	300	0	74.00(PK)	-16.92
2389.28	42.69 (AV)	1	300	0	54.00(AV)	-11.31

Radiated Emissions (VERTICAL) CH01						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2388.88	67.77 (PK)	1	290	0	74.00(PK)	-6.23
2388.88	52.54 (AV)	1	290	0	54.00(AV)	-1.46

Radiated Emissions (HORIZONTAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2483.80	58.18 (PK)	1	270	0	74.00(PK)	-15.82
2483.80	42.88 (AV)	1	270	0	54.00(AV)	-11.12

Radiated Emissions (VERTICAL) CH11						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Limit (dBuV/m)	Margin (dB)
2484.65	67.36 (PK)	1	340	0	74.00(PK)	-6.64
2484.65	52.14 (AV)	1	340	0	54.00(AV)	-1.86

**Notes :** 1.Margin= Amplitude - Limits

2.Height of table for EUT placed: 0.8 Meter.

3.ANT= Antenna height.

4.Duty= Duty cycle correction factor.

5. Amplitude= Reading Amplitude – Amplifier gain+ Cable loss+ Antenna factor  
(Auto calculate in spectrum analyzer)

## 8. Antenna Requirements

### 8.1 Standard Applicable :

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.2 Antenna Construction


	Model No	ANT TYPE	GAIN	type of connector
1	98241MYYF029	8241 Flying Lead Antenna	2.0 dBi	Reverse SMA
2	98P21MYYF001	2.4GHz PCB Antenna	2.0 dBi	N/A

## Appendix I- EUT Test SETUP

### MEASUREMENT OF POWER LINE CONDUCTED RFI VOLTAGE

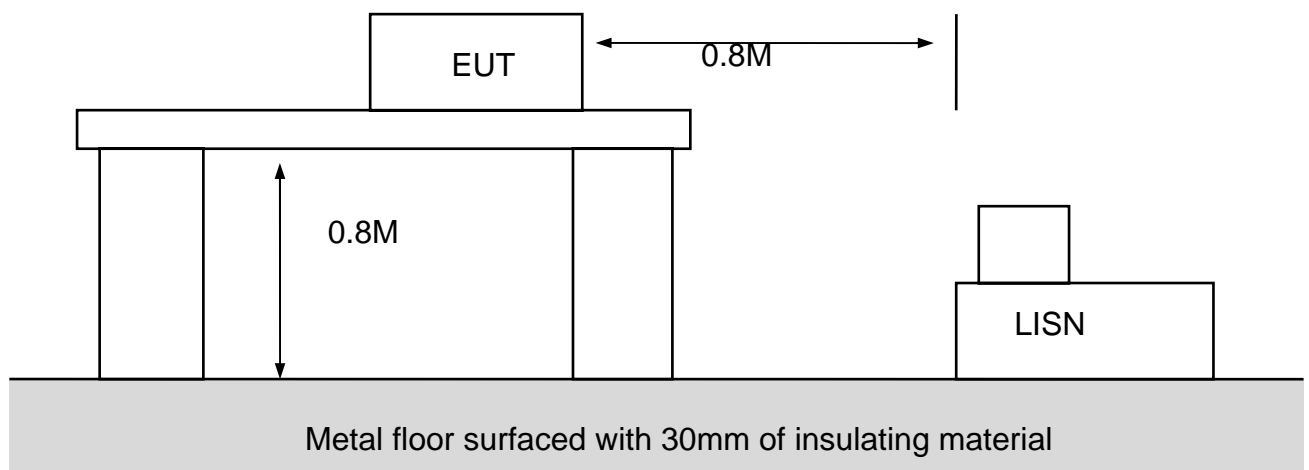

### MEASUREMENT OF RADIATED EMISSION

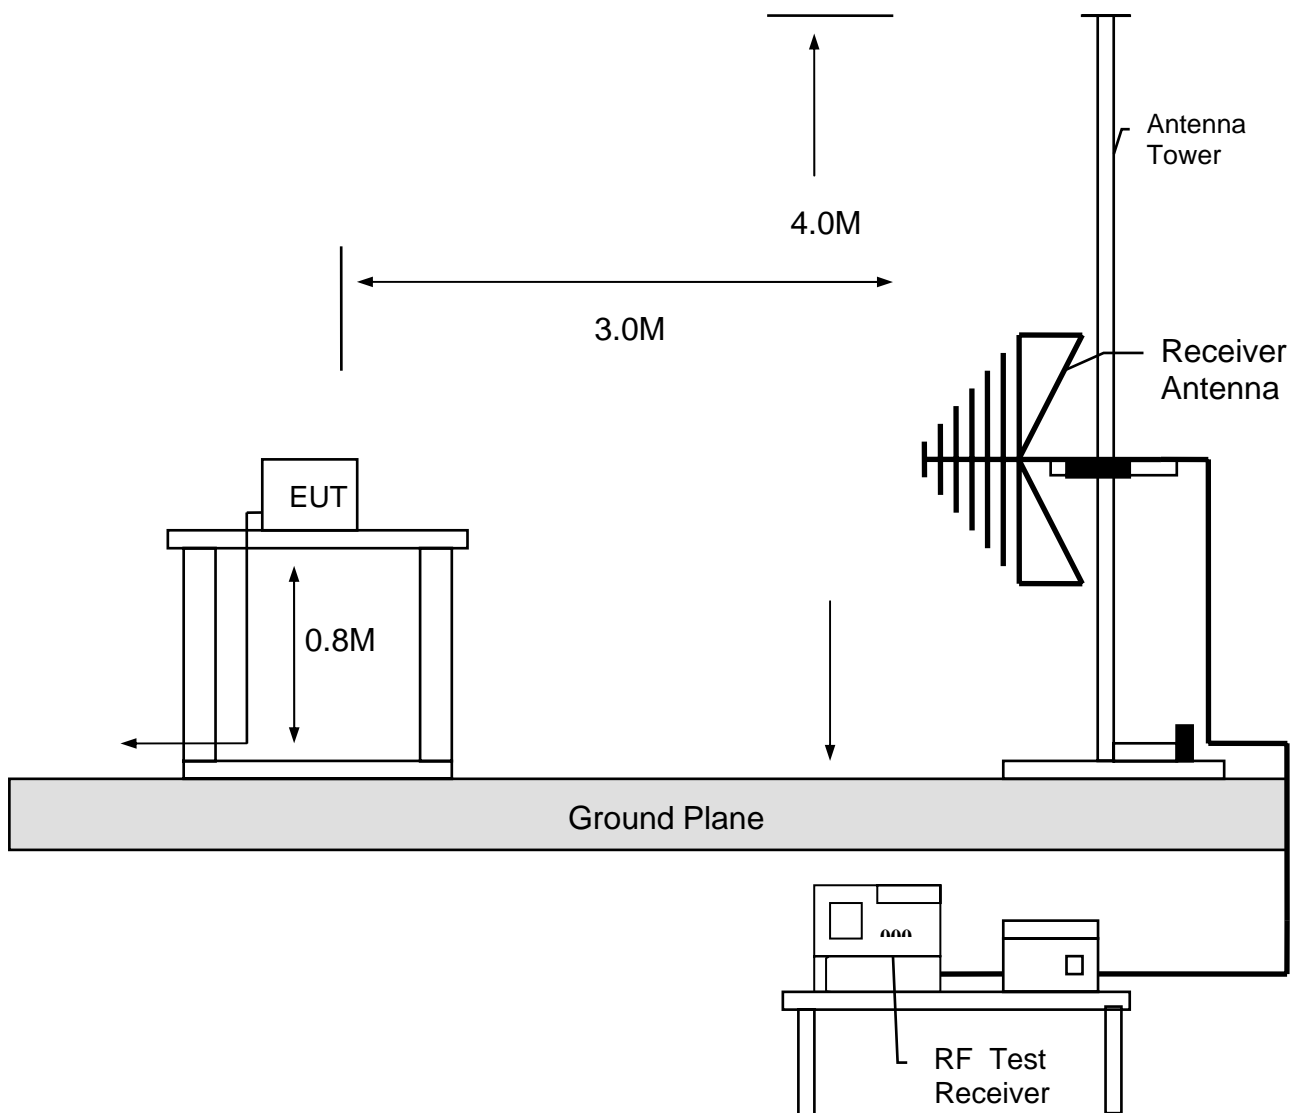

## Appendix II - (Brand / Trade Name & Model No. Multiple Listee)

Model No.	Trade Name
N/A	N/A



## Maximum Permissible Exposure

### 1. Introduction

In this document, we try to prove the safety of radiation harmfulness to the human body for our product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The Gain of the antenna used in this product is measured in a Fully Anechoic Chamber (FAC), and also the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis transmission formula is a far field assumption, the calculated result of that is an over-prediction for near field power density. We will take that as the worst case to specify the safety range.

### 2. Description of EUT

<b>Equipment</b>	Wireless ADSL IAD
<b>Applicant Name</b>	COMTREND CORPORATION
<b>Applicant Address</b>	3F-1, 10 Lane 609, Chung Hsin Road, Section 5 San Chung City, Taipei Hsien, Taiwan 241
<b>Manufacturer Name</b>	COMTREND CORPORATION
<b>Manufacturer Address</b>	3F-1, 10 Lane 609, Chung Hsin Road, Section 5 San Chung City, Taipei Hsien, Taiwan 241
<b>Model No</b>	NexusLink 5700
<b>FCC ID</b>	L9V5700

### 3. Classification

The antenna of this product, under normal use condition, is at least 20cm away from the body of the user. Warning statement to the user for keeping at least 20cm or more separation distance with the antenna should be included in users manual. So, this device is classified as Mobile Device.

#### 4. Friis Formula

Friis transmission formula :  $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot r^2)$

Where

$P_d$  = power density in  $mW/cm^2$

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$R$  = distance between observation point and center of the radiator in cm (20cm)

#### 5. RF Exposure Limit :

According to FCC 1. 1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

##### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density ( $mW/cm^2$ )	Average Time (minutes)
<b>(A)Limits For Occupational / Control Exposures</b>				
300-1500			F/300	6
1500-100,000			5	6
<b>(B)Limits For General Population / Uncontrolled Exposure</b>				
300-1500			F/1500	30
1500-100,000			1	30

#### 6. Test Result:

802.11b

Frequency (MHz)	Max RF Power (mW)	TX Antenna Gain (dBi)	Testing Result ( $mW/cm^2$ )	MPE Limit ( $mW/cm^2$ )
2412	306.19	2.0	0.1267	1
2437	283.79	2.0	0.1174	1
2462	289.06	2.0	0.1196	1

802.11g

Frequency (MHz)	Max RF Power (mW)	TX Antenna Gain (dBi)	Testing Result (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
2412	178.23	2.0	0.0737	1
2437	159.22	2.0	0.0658	1
2462	178.23	2.0	0.0737	1

802.11n HT20

Frequency (MHz)	Max RF Power (mW)	TX Antenna Gain (dBi)	Testing Result (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
2412	356.45	2.0	0.1475	1
2437	386.36	2.0	0.1598	1
2462	363.07	2.0	0.1502	1

802.11n HT40

Frequency (MHz)	Max RF Power (mW)	TX Antenna Gain (dBi)	Testing Result (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
2422	221.81	2.0	0.0917	1
2437	208.92	2.0	0.0864	1
2452	226.98	2.0	0.0939	1