




Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3, CH102		:

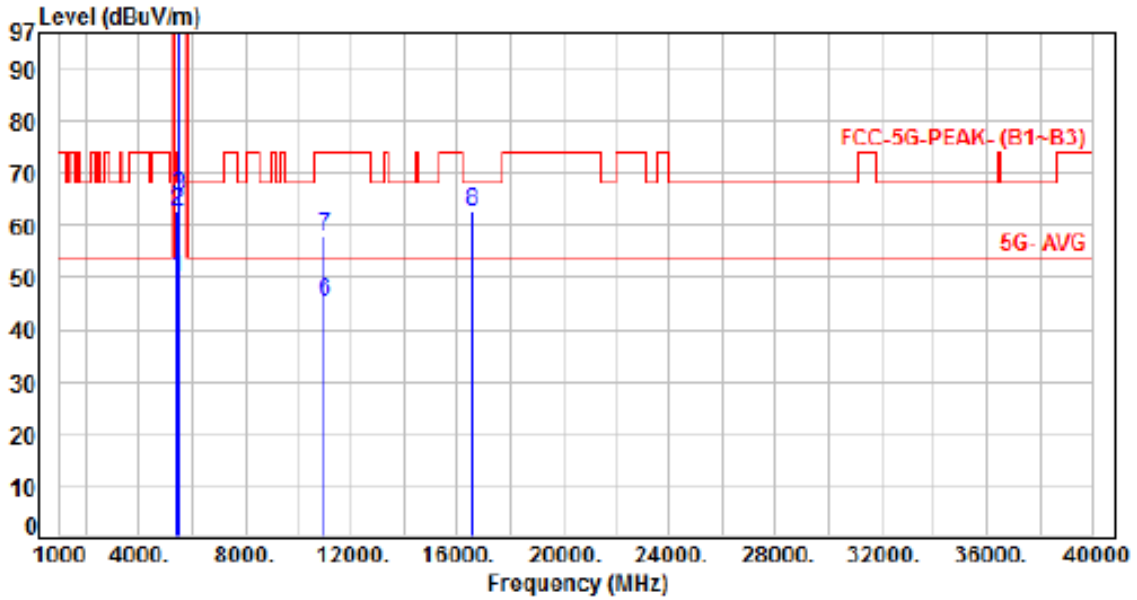

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.13	49.82	54.00	-4.18	Average	237	71	P
2	5460.00	6.69	55.85	62.54	74.00	-11.46	Peak	237	71	P
3	5470.00	6.72	50.97	65.69	68.20	-2.51	Peak	237	71	P
4	5510.00	6.79	96.24	103.03	200.00	-96.97	Average	237	71	P
5	5510.00	6.79	108.40	115.19	200.00	-84.81	Peak	237	71	P
6	11020.00	14.67	30.52	45.19	54.00	-8.81	Average	100	16	P
7	11020.00	14.67	43.11	57.78	74.00	-16.22	Peak	100	16	P
8	16530.00	17.31	45.45	62.76	68.20	-5.44	Peak	100	347	P

Note: Level-Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 3, CH118		:

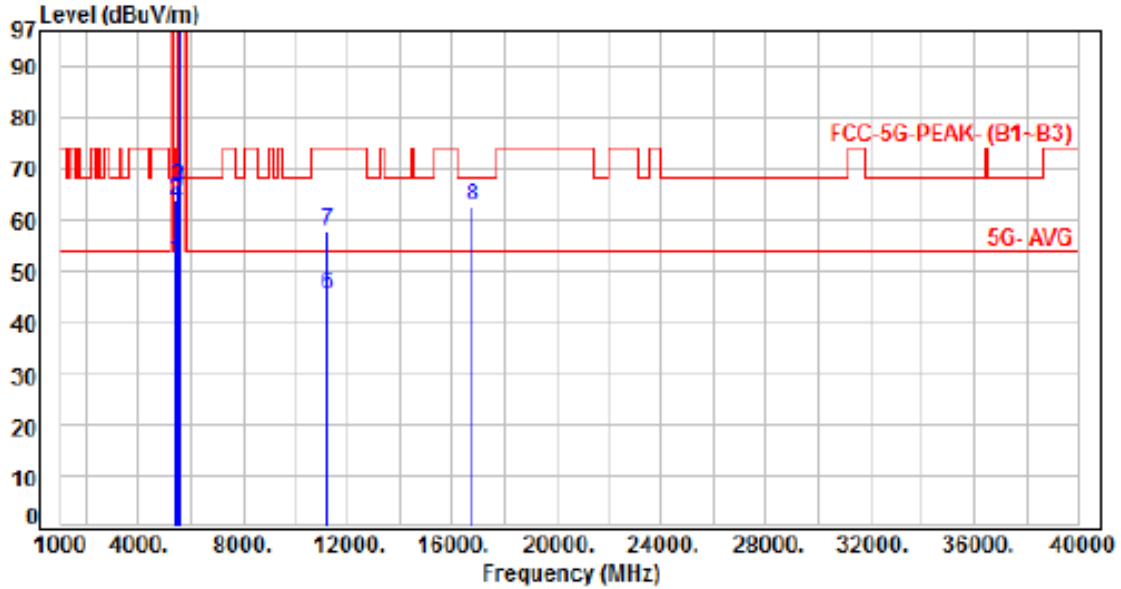


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	45.44	52.13	54.00	-1.87	Average	114	140	P
2	5460.00	6.69	57.09	63.78	74.00	-10.22	Peak	114	140	P
3	5470.00	6.72	59.53	66.25	68.20	-1.95	Peak	114	140	P
4	5590.00	6.77	102.25	109.02	200.00	-90.98	Average	114	140	P
5	5590.00	6.77	114.88	121.65	200.00	-78.35	Peak	114	140	P
6	11180.00	14.70	30.53	45.23	54.00	-8.77	Average	100	32	P
7	11180.00	14.70	43.32	58.02	74.00	-15.98	Peak	100	32	P
8	16770.00	18.88	43.79	62.67	68.20	-5.53	Peak	100	348	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3, CH118		:

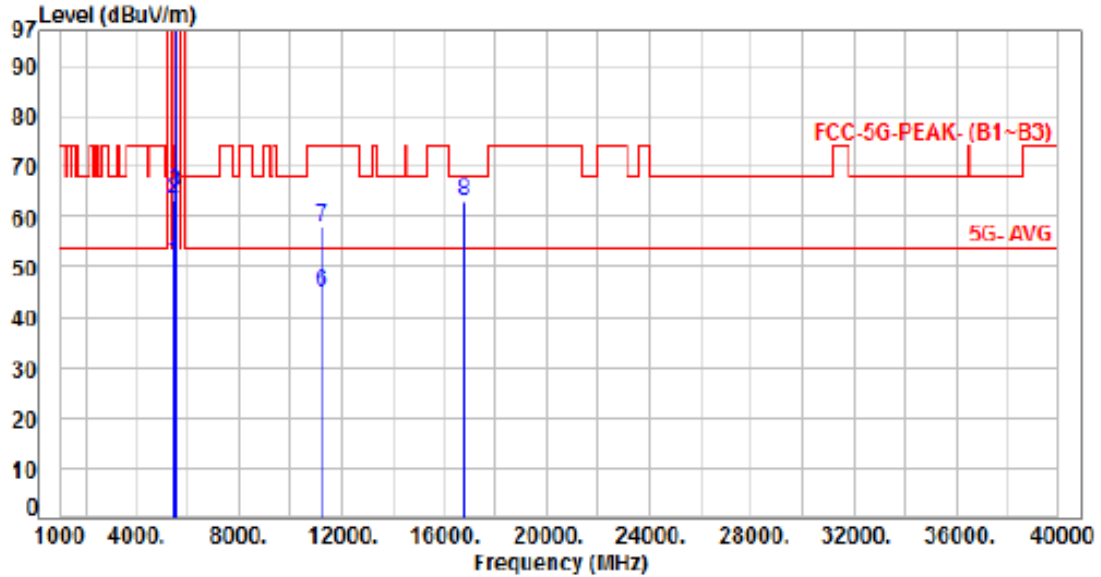


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	44.19	50.88	54.00	-3.12	Average	377	75	P
2	5460.00	6.69	56.85	63.54	74.00	-10.46	Peak	377	75	P
3	5470.00	6.72	58.27	64.99	68.20	-3.21	Peak	377	75	P
4	5590.00	6.77	102.14	108.91	200.00	-91.09	Average	377	75	P
5	5590.00	6.77	114.70	121.47	200.00	-78.53	Peak	377	75	P
6	11180.00	14.70	30.29	44.99	54.00	-9.01	Average	100	37	P
7	11180.00	14.70	43.29	57.99	74.00	-16.01	Peak	100	37	P
8	16770.00	18.88	44.34	63.22	68.20	-4.98	Peak	100	327	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 3, CH134		:

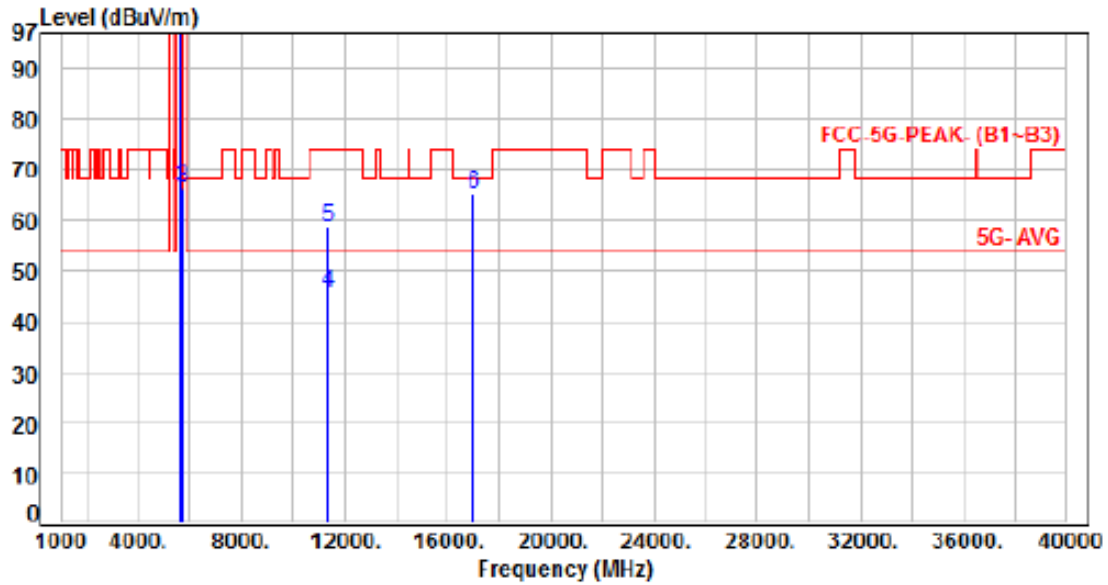


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	6.71	97.39	104.10	200.00	-95.90	Average	100	139	P
2	5670.00	6.71	109.57	116.28	200.00	-83.72	Peak	100	139	P
3	5725.00	6.83	59.53	66.36	68.20	-1.84	Peak	100	139	P
4	11340.00	14.84	30.98	45.82	54.00	-8.18	Average	100	21	P
5	11340.00	14.84	43.88	58.72	74.00	-15.28	Peak	100	21	P
6	17010.00	20.59	44.68	65.27	68.20	-2.93	Peak	100	349	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3, CH134		:

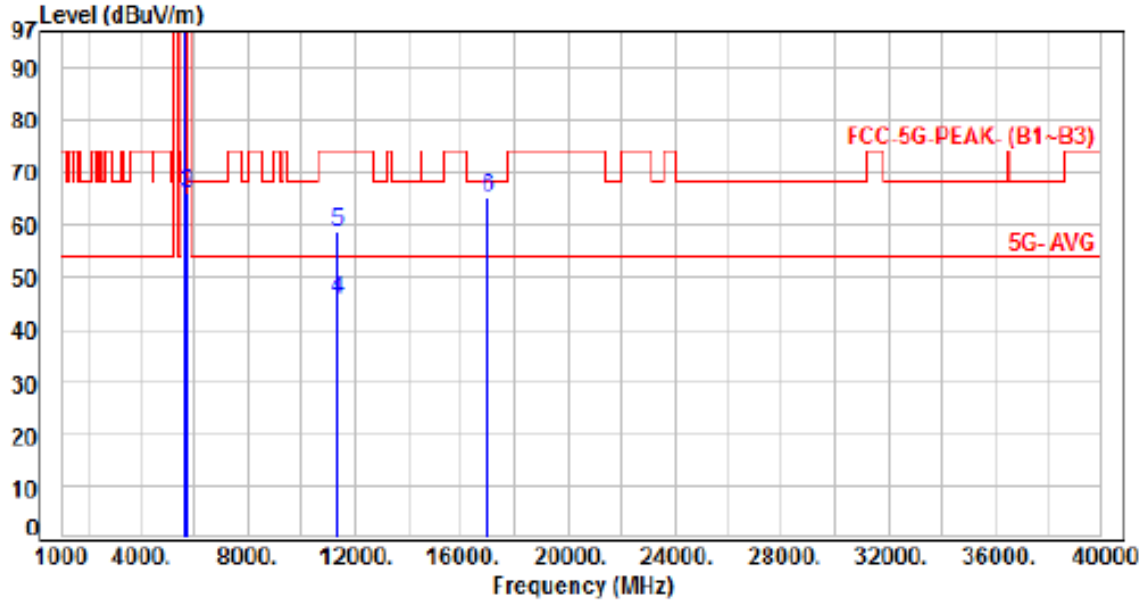


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	6.71	97.26	103.97	200.00	-96.03	Average	100	51	P
2	5670.00	6.71	109.28	115.99	200.00	-84.01	Peak	100	51	P
3	5725.00	6.83	59.06	65.89	68.20	-2.31	Peak	100	51	P
4	11340.00	14.84	30.80	45.64	54.00	-8.36	Average	100	19	P
5	11340.00	14.84	43.90	58.74	74.00	-15.26	Peak	100	19	P
6	17010.00	20.59	44.54	65.13	68.20	-3.07	Peak	100	326	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3, CH106		

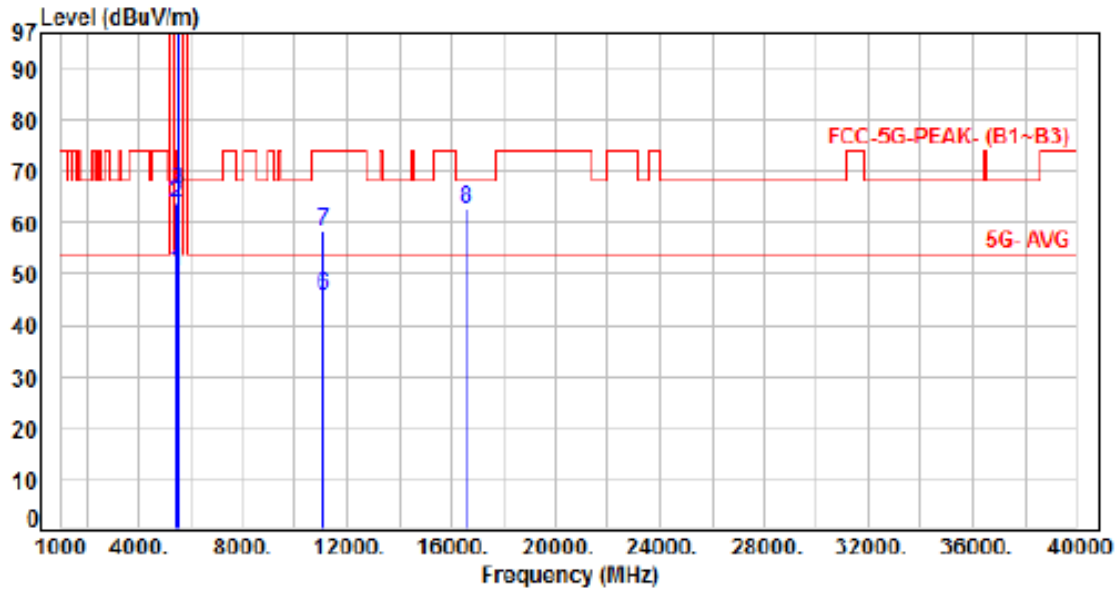

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.91	50.60	54.00	-3.40	Average	100	145	P
2	5460.00	6.69	57.30	63.99	74.00	-10.01	Peak	100	145	P
3	5470.00	6.72	59.60	66.32	68.20	-1.88	Peak	100	145	P
4	5530.00	6.76	92.77	99.53	200.00	-100.47	Average	100	145	P
5	5530.00	6.76	105.10	111.86	200.00	-88.14	Peak	100	145	P
6	11060.00	14.66	30.97	45.63	54.00	-8.37	Average	100	51	P
7	11060.00	14.66	43.70	58.36	74.00	-15.64	Peak	100	51	P
8	16590.00	17.84	45.01	62.85	68.20	-5.35	Peak	100	311	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3, CH106		:

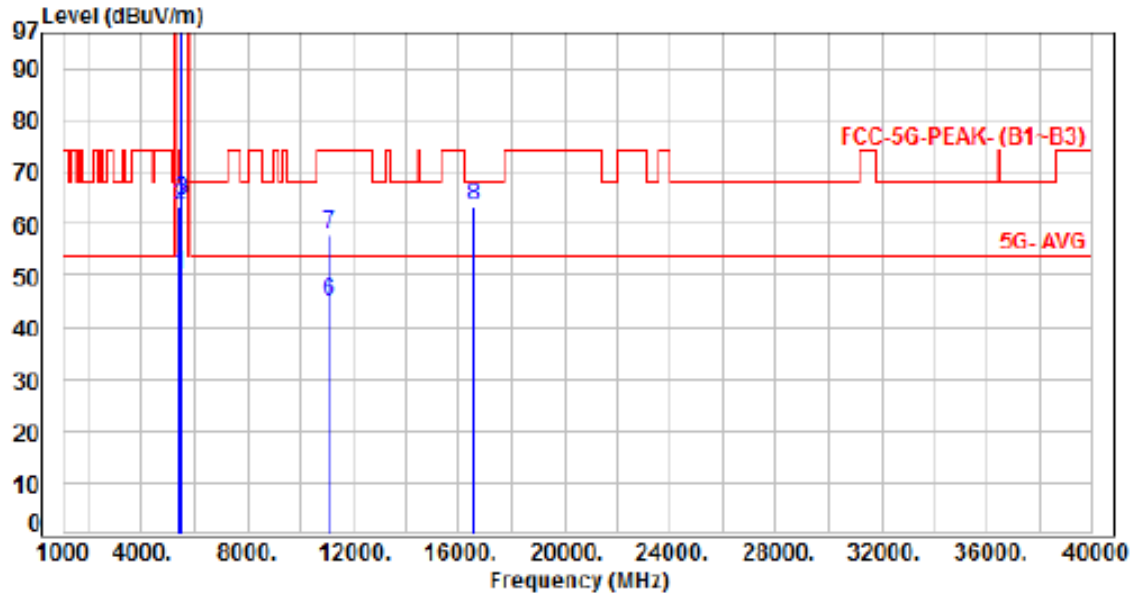


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.62	50.31	54.00	-3.69	Average	400	71	P
2	5460.00	6.69	56.86	63.55	74.00	-10.45	Peak	400	71	P
3	5470.00	6.72	57.85	64.57	68.20	-3.63	Peak	400	71	P
4	5530.00	6.76	92.54	99.30	200.00	-100.70	Average	400	71	P
5	5530.00	6.76	105.02	111.78	200.00	-88.22	Peak	400	71	P
6	11060.00	14.66	30.51	45.17	54.00	-8.83	Average	100	34	P
7	11060.00	14.66	43.30	57.96	74.00	-16.04	Peak	100	34	P
8	16590.00	17.84	45.42	63.26	68.20	-4.94	Peak	100	344	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3, CH122		:

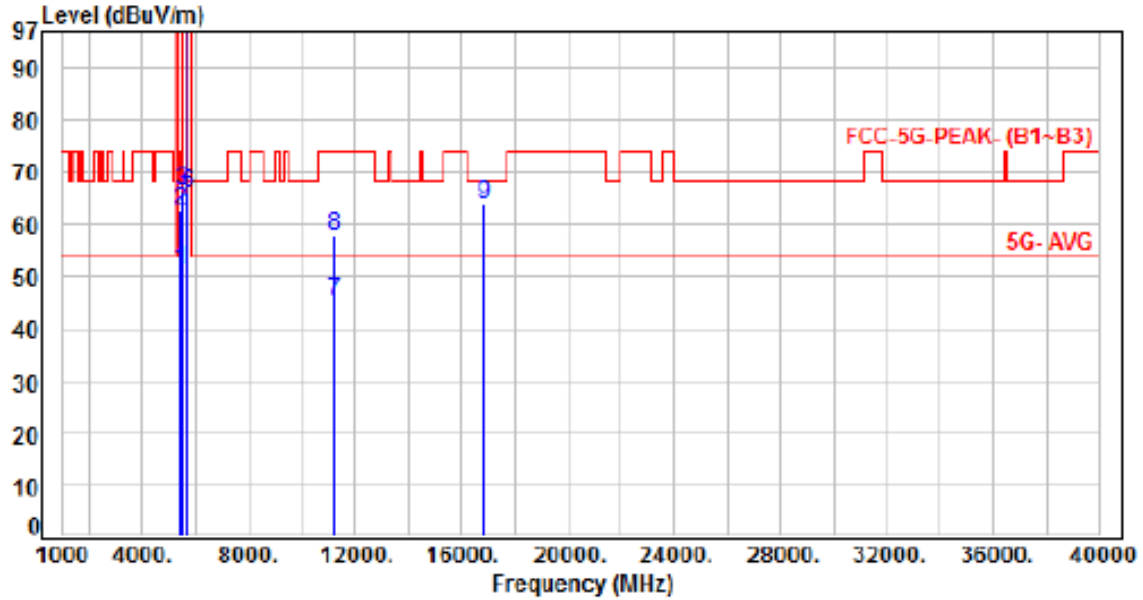


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	44.47	51.16	54.00	-2.84	Average	100	146	P
2	5460.00	6.69	55.90	62.59	74.00	-11.41	Peak	100	146	P
3	5470.00	6.72	59.83	66.55	68.20	-1.65	Peak	100	146	P
4	5610.00	6.75	94.88	101.63	200.00	-98.37	Average	100	146	P
5	5610.00	6.75	106.14	112.89	200.00	-87.11	Peak	100	146	P
6	5725.00	6.83	59.20	66.03	68.20	-2.17	Peak	100	146	P
7	11220.00	14.73	30.82	45.55	54.00	-8.45	Average	100	32	P
8	11220.00	14.73	43.19	57.92	74.00	-16.08	Peak	100	32	P
9	16830.00	19.35	44.35	63.70	68.20	-4.50	Peak	100	329	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3, CH122		:

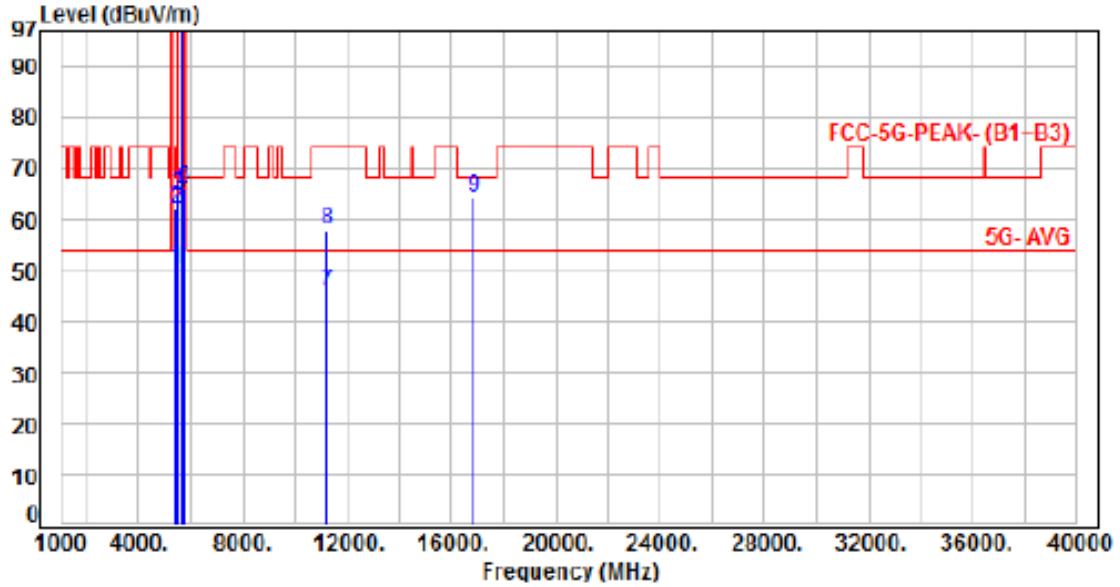

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.40	50.09	54.00	-3.91	Average	381	74	P
2	5460.00	6.69	55.25	61.94	74.00	-12.06	Peak	381	74	P
3	5470.00	6.72	57.98	64.70	68.20	-3.50	Peak	381	74	P
4	5610.00	6.75	94.52	101.27	200.00	-98.73	Average	381	74	P
5	5610.00	6.75	106.12	112.87	200.00	-87.13	Peak	381	74	P
6	5725.00	6.83	59.15	65.99	68.20	-2.21	Peak	381	74	P
7	11220.00	14.73	30.99	45.72	54.00	-8.28	Average	100	28	P
8	11220.00	14.73	43.14	57.87	74.00	-16.13	Peak	100	28	P
9	16830.00	19.35	44.86	64.21	68.20	-3.99	Peak	100	297	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3, CH114		:

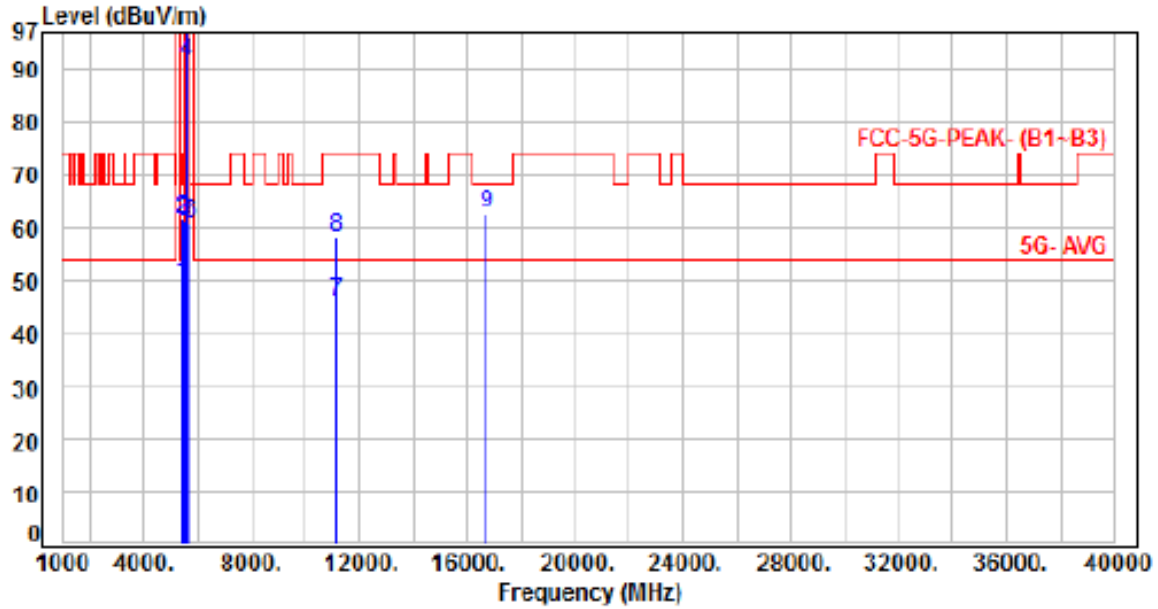


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.61	49.30	54.00	-4.70	Average	100	142	P
2	5460.00	6.69	54.87	61.56	74.00	-12.44	Peak	100	142	P
3	5470.00	6.72	54.41	61.13	68.20	-7.07	Peak	100	142	P
4	5570.00	6.75	84.64	91.39	200.00	-108.61	Average	100	142	P
5	5570.00	6.75	95.76	102.51	200.00	-97.49	Peak	100	142	P
6	5725.00	6.83	53.92	60.75	68.20	-7.45	Peak	100	142	P
7	11140.00	14.67	31.61	46.28	54.00	-7.72	Average	100	37	P
8	11140.00	14.67	43.69	58.36	74.00	-15.64	Peak	100	37	P
9	16710.00	18.50	44.27	62.77	68.20	-5.43	Peak	100	336	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 3, CH114		:

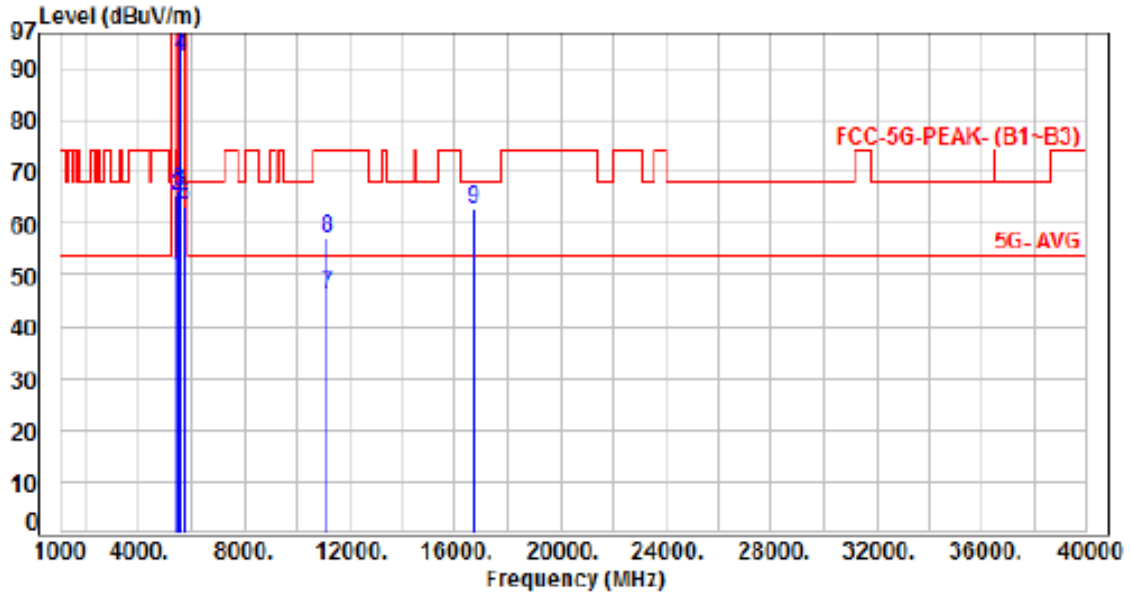


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.62	49.31	54.00	-4.69	Average	240	73	P
2	5460.00	6.69	58.73	65.42	74.00	-8.58	Peak	240	73	P
3	5470.00	6.72	59.80	66.52	68.20	-1.68	Peak	240	73	P
4	5570.00	6.75	85.41	92.16	200.00	-107.84	Average	240	73	P
5	5570.00	6.75	96.92	103.67	200.00	-96.33	Peak	240	73	P
6	5725.00	6.83	56.76	63.59	68.20	-4.61	Peak	240	73	P
7	11140.00	14.67	31.36	46.03	54.00	-7.97	Average	100	19	P
8	11140.00	14.67	42.57	57.24	74.00	-16.76	Peak	100	19	P
9	16710.00	18.50	44.11	62.61	68.20	-5.59	Peak	100	347	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 3 Straddle Channel, CH144		:

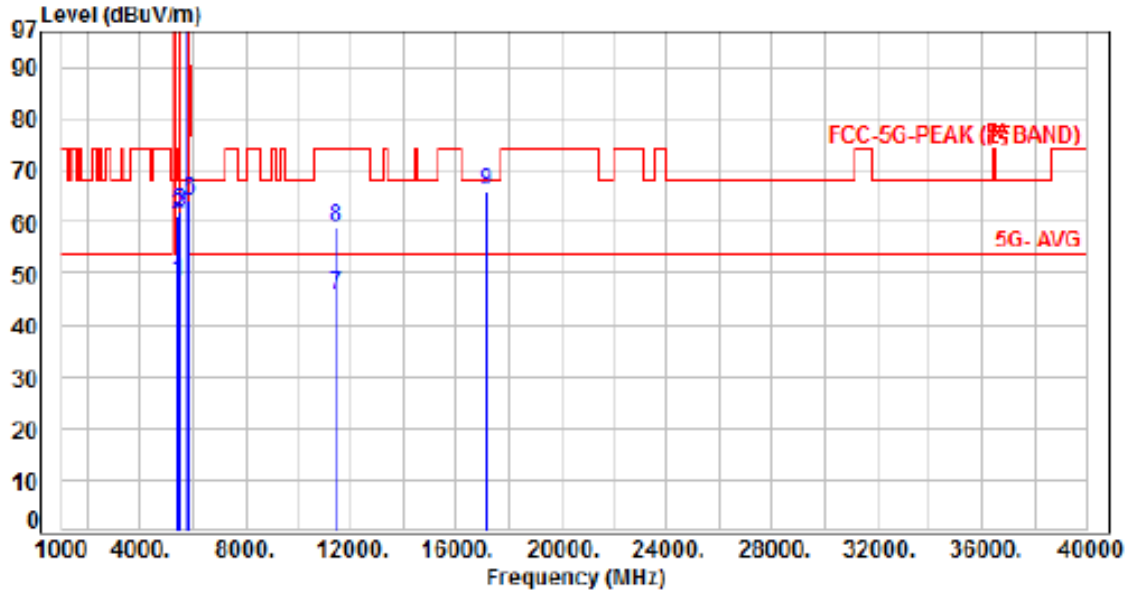


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.59	48.28	54.00	-5.72	Average	258	16	P
2	5460.00	6.69	54.70	61.39	74.00	-12.61	Peak	258	16	P
3	5470.00	6.72	55.42	62.14	68.20	-6.06	Peak	258	16	P
4	5720.00	6.83	107.52	114.35	200.00	-85.65	Average	258	16	P
5	5720.00	6.83	118.06	124.89	200.00	-75.11	Peak	258	16	P
6	5850.00	6.86	57.42	64.28	122.20	-57.92	Peak	258	16	P
7	11440.00	15.05	30.84	45.89	54.00	-8.11	Average	100	168	P
8	11440.00	15.05	43.87	58.92	74.00	-15.08	Peak	100	168	P
9	17160.00	21.14	44.94	66.08	68.20	-2.12	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 3 Straddle Channel, CH144		:

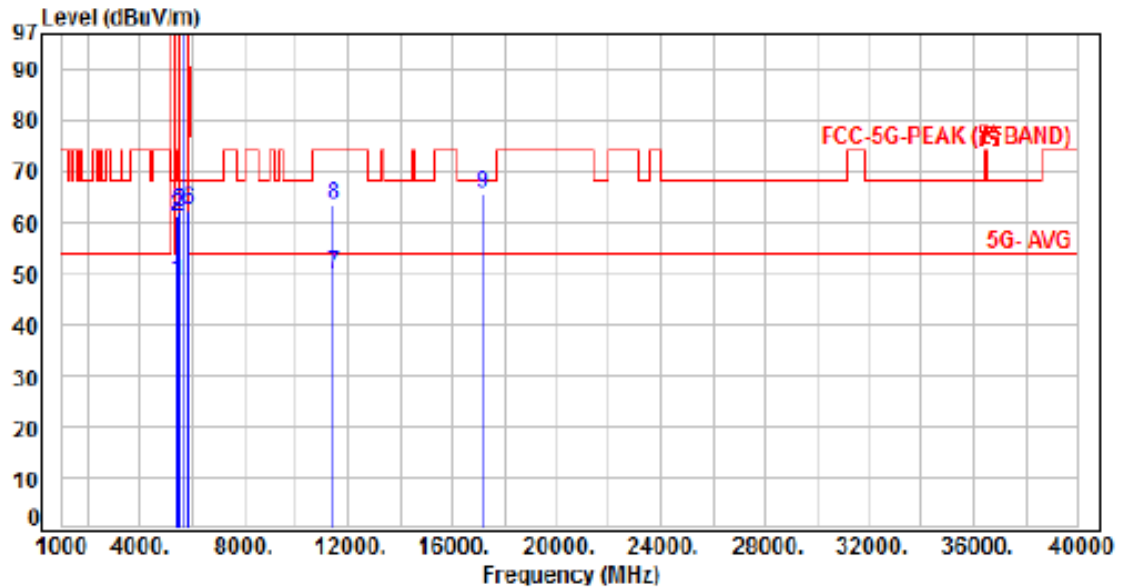


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.56	48.25	54.00	-5.75	Average	100	75	P
2	5460.00	6.69	54.57	61.26	74.00	-12.74	Peak	100	75	P
3	5470.00	6.72	55.38	62.10	68.20	-6.10	Peak	100	75	P
4	5720.00	6.83	107.43	114.26	200.00	-85.74	Average	100	75	P
5	5720.00	6.83	117.79	124.62	200.00	-75.38	Peak	100	75	P
6	5850.00	6.86	55.49	62.35	122.20	-59.85	Peak	100	75	P
7	11440.00	15.05	34.66	49.71	54.00	-4.29	Average	100	152	P
8	11440.00	15.05	48.28	63.33	74.00	-10.67	Peak	100	152	P
9	17160.00	21.14	44.57	65.71	68.20	-2.49	Peak	100	344	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 3 Straddle Channel, CH144		

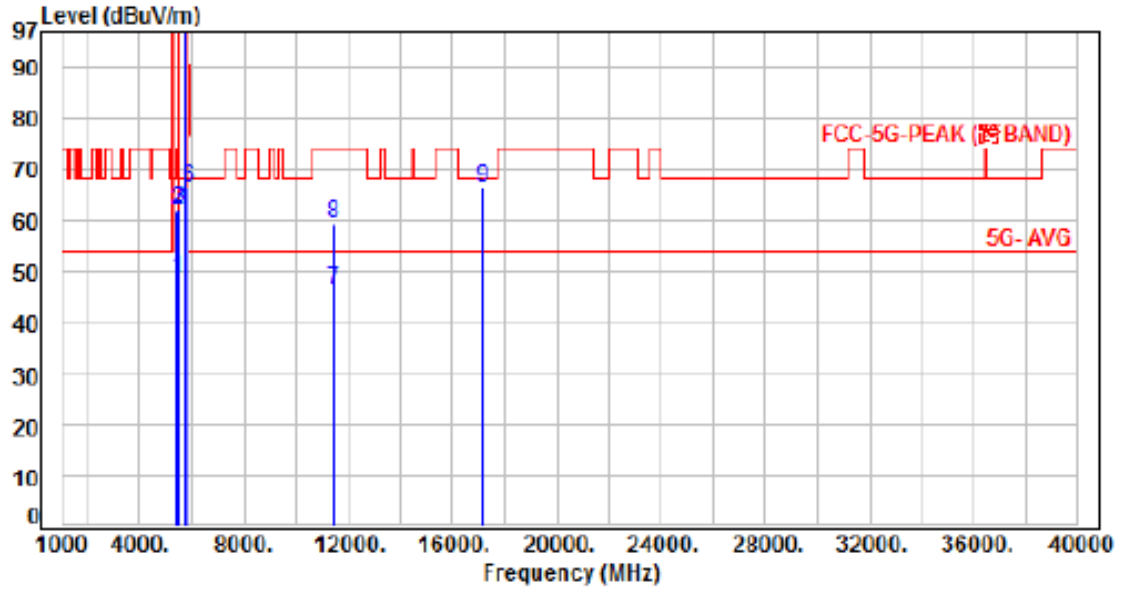


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.09	48.78	54.00	-5.22	Average	100	145	P
2	5460.00	6.69	55.34	62.03	74.00	-11.97	Peak	100	145	P
3	5470.00	6.72	55.62	62.34	68.20	-5.86	Peak	100	145	P
4	5720.00	6.83	106.93	113.76	200.00	-86.24	Average	100	145	P
5	5720.00	6.83	119.10	125.93	200.00	-74.07	Peak	100	145	P
6	5850.00	6.86	59.71	66.57	122.20	-55.63	Peak	100	145	P
7	11440.00	15.05	31.33	46.38	54.00	-7.62	Average	100	192	P
8	11440.00	15.05	44.40	59.45	74.00	-14.55	Peak	100	192	P
9	17160.00	21.14	45.43	66.57	68.20	-1.63	Peak	100	299	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 3 Straddle Channel, CH144		:

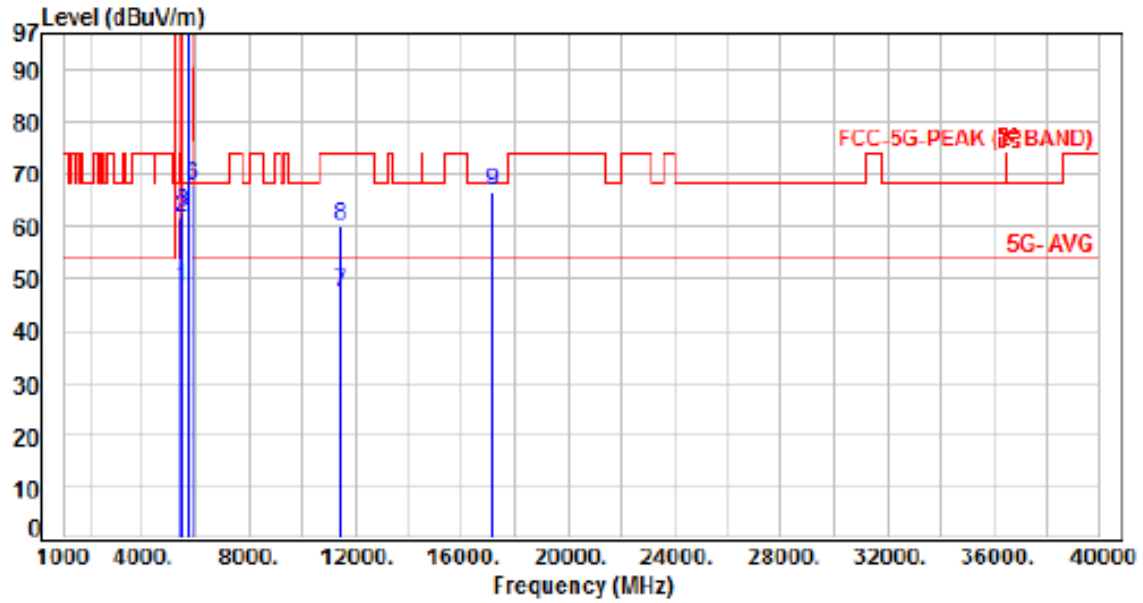


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.78	48.47	54.00	-5.53	Average	391	81	P
2	5460.00	6.69	55.05	61.74	74.00	-12.26	Peak	391	81	P
3	5470.00	6.72	55.85	62.57	68.20	-5.63	Peak	391	81	P
4	5720.00	6.83	107.03	113.86	200.00	-86.14	Average	391	81	P
5	5720.00	6.83	119.54	126.37	200.00	-73.63	Peak	391	81	P
6	5850.00	6.86	61.13	67.99	122.20	-54.21	Peak	391	81	P
7	11440.00	15.05	32.24	47.29	54.00	-6.71	Average	100	305	P
8	11440.00	15.05	44.94	59.99	74.00	-14.01	Peak	100	305	P
9	17160.00	21.14	45.66	66.80	68.20	-1.40	Peak	137	347	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 3 Straddle Channel, CH142		:

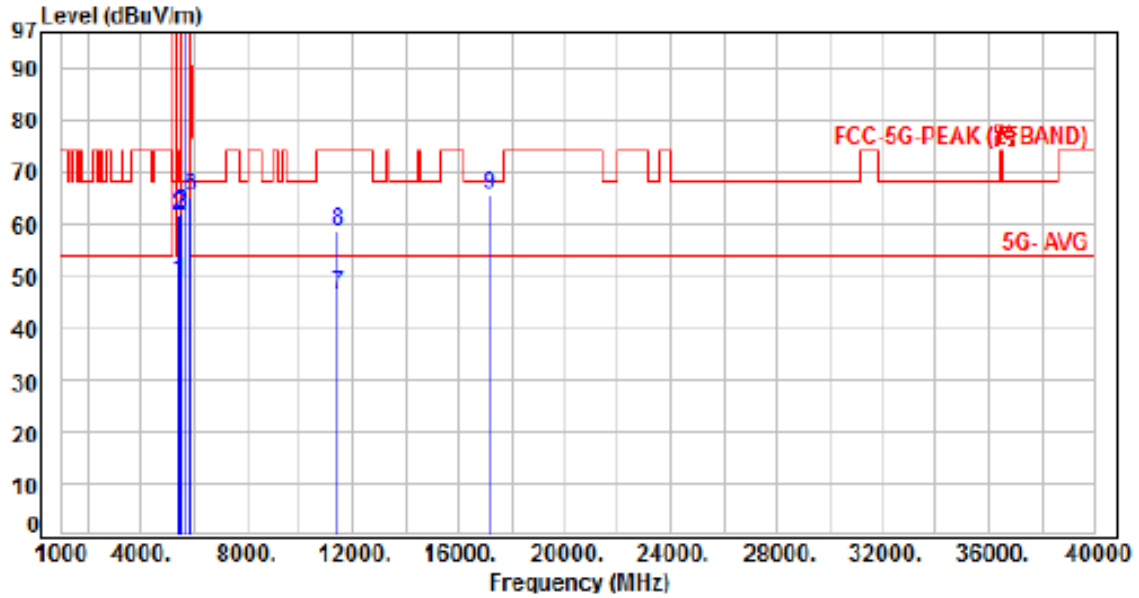


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5450.00	6.69	42.40	49.09	54.00	-4.91	Average	127	136	P
2	5450.00	6.69	54.79	61.48	74.00	-12.52	Peak	127	136	P
3	5470.00	6.72	55.09	61.81	68.20	-6.39	Peak	127	136	P
4	5710.00	6.84	99.72	106.56	200.00	-93.44	Average	127	136	P
5	5710.00	6.84	108.96	115.80	200.00	-84.20	Peak	127	136	P
6	5850.00	6.86	58.27	65.13	122.20	-57.07	Peak	127	136	P
7	11420.00	15.00	31.38	46.38	54.00	-7.62	Average	100	216	P
8	11420.00	15.00	43.66	58.66	74.00	-15.34	Peak	100	216	P
9	17130.00	20.97	44.61	65.58	68.20	-2.62	Peak	100	330	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3 Straddle Channel, CH142		:

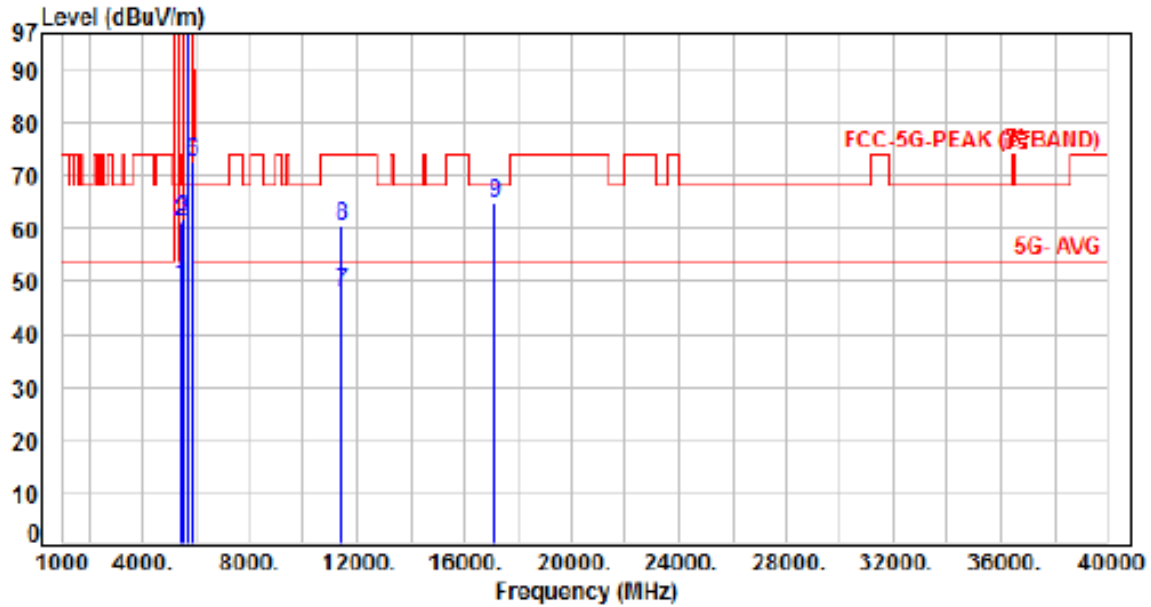


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.39	49.08	54.00	-4.92	Average	106	49	P
2	5460.00	6.69	54.59	61.28	74.00	-12.72	Peak	106	49	P
3	5470.00	6.72	55.31	62.03	68.20	-6.17	Peak	106	49	P
4	5710.00	6.84	104.24	111.08	200.00	-88.92	Average	106	49	P
5	5710.00	6.84	115.85	122.69	200.00	-77.31	Peak	106	49	P
6	5850.00	6.86	65.73	72.59	122.20	-49.61	Peak	106	49	P
7	11420.00	15.00	32.89	47.89	54.00	-6.11	Average	100	300	P
8	11420.00	15.00	45.34	60.34	74.00	-13.66	Peak	100	300	P
9	17130.00	20.97	43.86	64.83	68.20	-3.37	Peak	100	326	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3 Straddle Channel, CH138		:

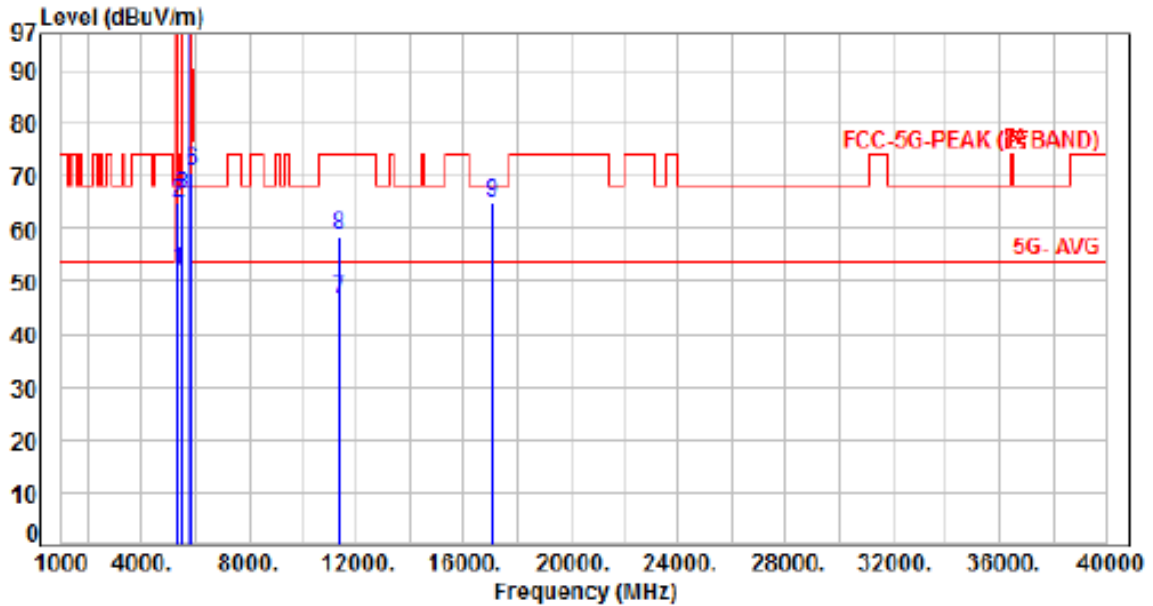


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5350.00	6.57	45.44	52.01	54.00	-1.99	Average	142	136	P
2	5350.00	6.57	58.26	64.83	74.00	-9.17	Peak	142	136	P
3	5470.00	6.72	59.56	66.28	68.20	-1.92	Peak	142	136	P
4	5690.00	6.81	99.47	106.28	200.00	-93.72	Average	142	136	P
5	5690.00	6.81	111.27	118.08	200.00	-81.92	Peak	142	136	P
6	5850.00	6.86	63.78	70.64	122.20	-51.56	Peak	142	136	P
7	11380.00	14.91	31.43	46.34	54.00	-7.66	Average	100	319	P
8	11380.00	14.91	43.63	58.54	74.00	-15.46	Peak	100	319	P
9	17070.00	20.74	44.25	64.99	68.20	-3.21	Peak	100	334	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3 Straddle Channel, CH138		:

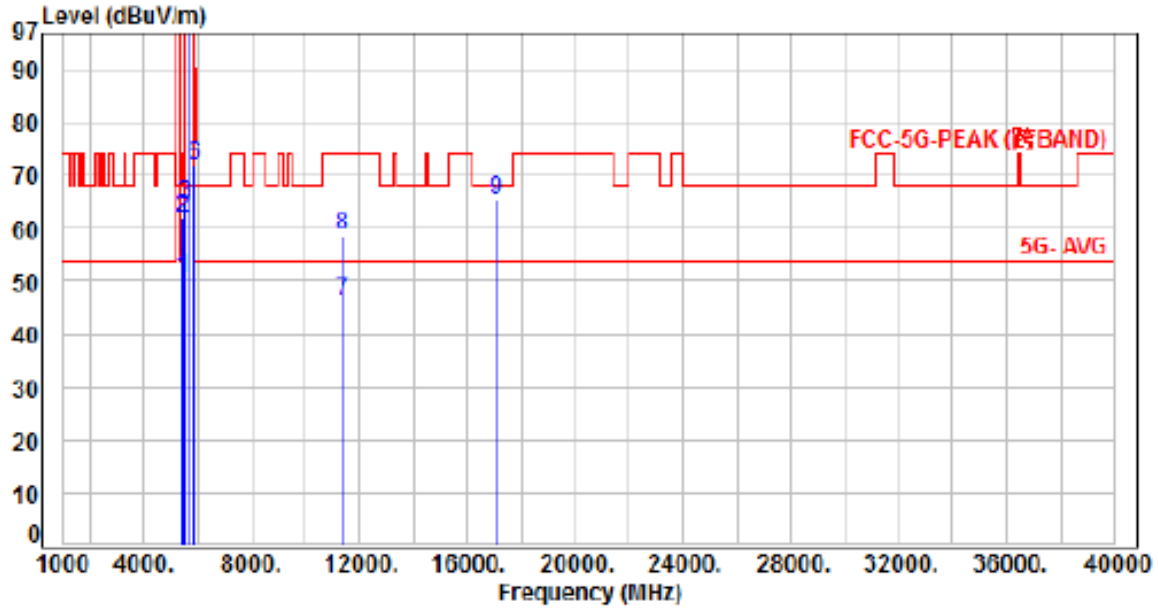

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.71	50.40	54.00	-3.60	Average	108	49	P
2	5460.00	6.69	55.18	61.87	74.00	-12.13	Peak	108	49	P
3	5470.00	6.72	57.76	64.48	68.20	-3.72	Peak	108	49	P
4	5690.00	6.81	98.71	105.52	200.00	-94.48	Average	108	49	P
5	5690.00	6.81	111.07	117.88	200.00	-82.12	Peak	108	49	P
6	5850.00	6.86	64.98	71.84	122.20	-50.36	Peak	108	49	P
7	11380.00	14.91	31.36	46.27	54.00	-7.73	Average	100	312	P
8	11380.00	14.91	43.90	58.81	74.00	-15.19	Peak	100	312	P
9	17070.00	20.74	44.43	65.17	68.20	-3.03	Peak	100	349	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH149		

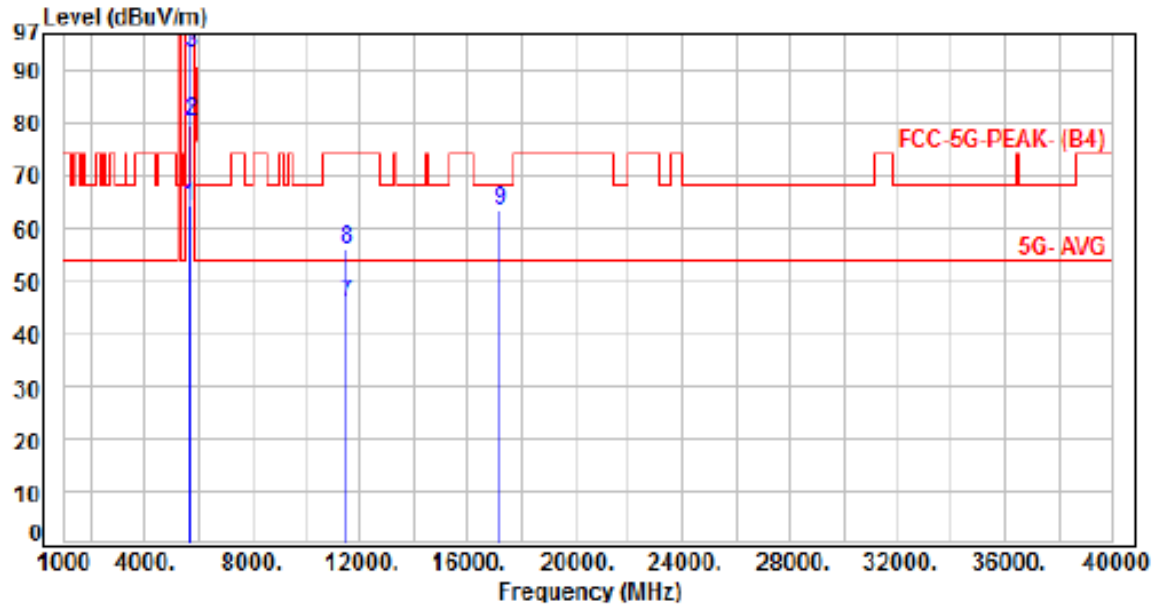

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	57.47	64.09	68.20	-4.11	Peak	100	50	P
2	5700.00	6.86	73.55	80.41	105.20	-24.79	Peak	100	50	P
3	5720.00	6.83	86.48	93.31	110.80	-17.49	Peak	100	50	P
4	5725.00	6.83	96.45	103.28	122.20	-18.92	Peak	100	50	P
5	5745.00	6.80	105.82	113.62	200.00	-86.38	Average	100	50	P
6	5745.00	6.80	117.18	123.98	200.00	-76.02	Peak	100	50	P
7	11490.00	15.18	30.57	45.75	54.00	-8.25	Average	100	169	P
8	11490.00	15.18	40.96	56.14	74.00	-17.86	Peak	100	169	P
9	17235.00	21.58	41.94	63.52	68.20	-4.68	Peak	100	256	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH149		:




No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	53.53	60.15	68.20	-8.05	Peak	100	78	P
2	5700.00	6.86	66.18	73.04	105.20	-32.16	Peak	100	78	P
3	5720.00	6.83	79.22	86.05	110.80	-24.75	Peak	100	78	P
4	5725.00	6.83	86.79	93.62	122.20	-28.58	Peak	100	78	P
5	5745.00	6.80	106.51	113.31	200.00	-86.69	Average	100	78	P
6	5745.00	6.80	116.86	123.66	200.00	-76.34	Peak	100	78	P
7	11490.00	15.18	34.02	49.20	54.00	-4.80	Average	175	142	P
8	11490.00	15.18	49.47	64.65	74.00	-9.35	Peak	175	142	P
9	17235.00	21.58	43.59	65.17	68.20	-3.03	Peak	100	331	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH157		:

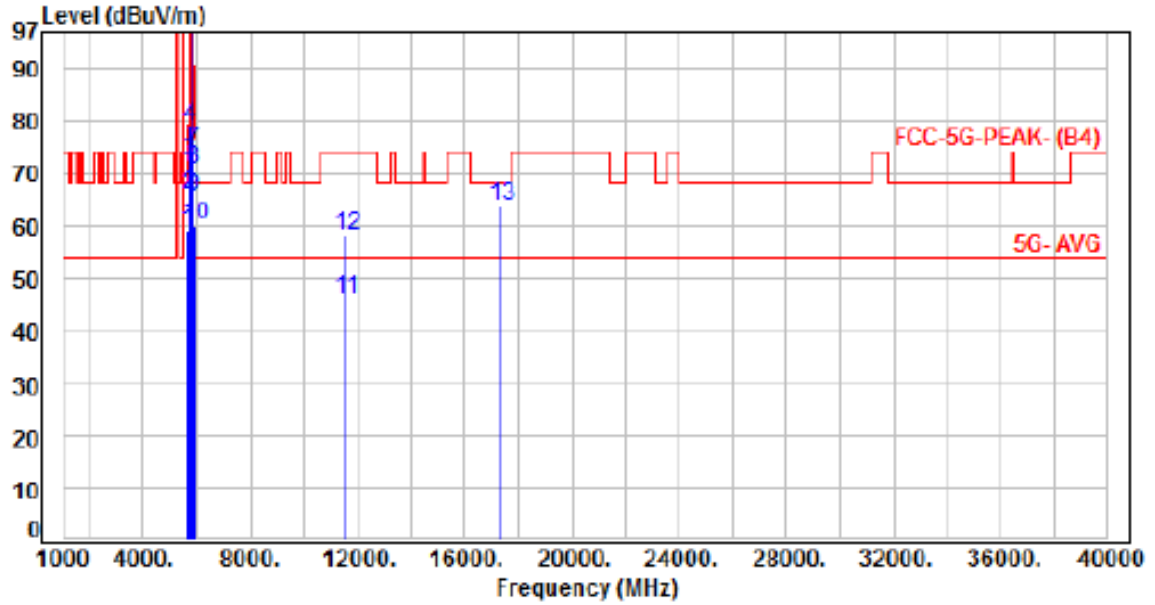


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	52.33	58.95	68.20	-9.25	Peak	100	51	P
2	5700.00	6.86	59.16	66.02	105.20	-39.18	Peak	100	51	P
3	5720.00	6.83	65.37	72.20	110.80	-38.60	Peak	100	51	P
4	5725.00	6.83	72.28	79.11	122.20	-43.09	Peak	100	51	P
5	5785.00	6.81	108.37	115.18	200.00	-84.82	Average	100	51	P
6	5785.00	6.81	118.94	125.75	200.00	-74.25	Peak	100	51	P
7	5850.00	6.86	67.78	74.64	122.20	-47.56	Peak	100	51	P
8	5855.00	6.91	64.05	70.96	110.80	-39.84	Peak	100	51	P
9	5875.00	7.08	58.57	65.65	105.20	-39.55	Peak	100	51	P
10	5925.00	7.32	52.93	60.25	68.20	-7.95	Peak	100	51	P
11	11570.00	15.42	30.75	46.17	54.00	-7.83	Average	100	256	P
12	11570.00	15.42	42.77	58.19	74.00	-15.81	Peak	100	256	P
13	17355.00	22.30	41.38	63.68	68.20	-4.52	Peak	100	133	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH157		:

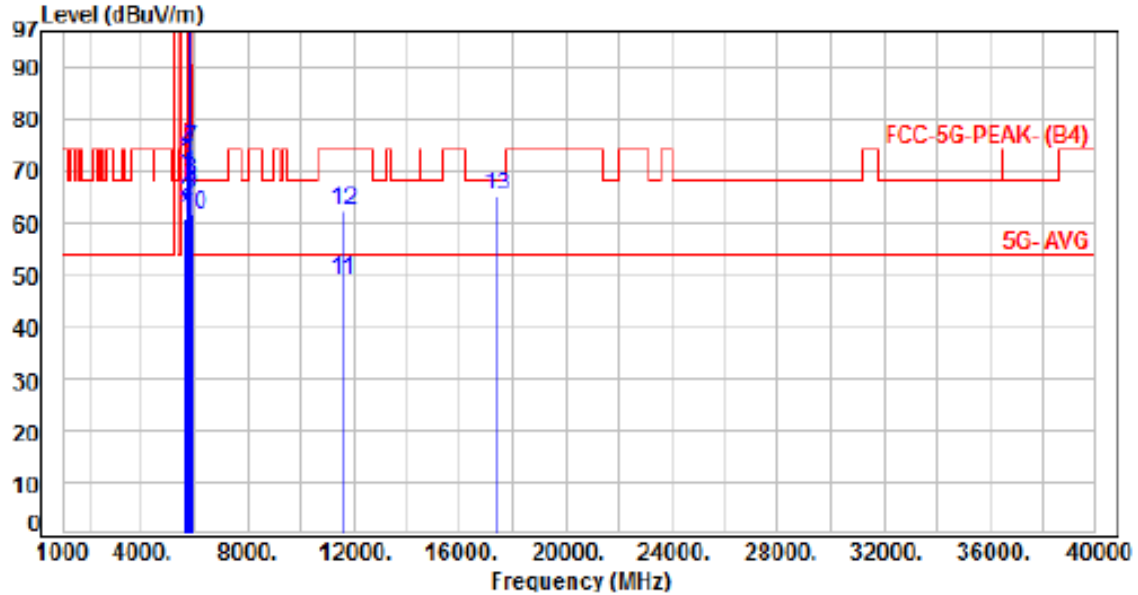


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	54.12	60.74	68.20	-7.46	Peak	383	89	P
2	5700.00	6.86	57.47	64.33	105.20	-40.87	Peak	383	89	P
3	5720.00	6.83	64.45	71.28	110.80	-39.52	Peak	383	89	P
4	5725.00	6.83	66.76	73.59	122.20	-48.61	Peak	383	89	P
5	5785.00	6.81	109.06	115.87	200.00	-84.13	Average	383	89	P
6	5785.00	6.81	120.02	126.83	200.00	-73.17	Peak	383	89	P
7	5850.00	6.86	67.10	73.96	122.20	-48.24	Peak	383	89	P
8	5855.00	6.91	61.17	68.08	110.80	-42.72	Peak	383	89	P
9	5875.00	7.08	58.57	65.65	105.20	-39.55	Peak	383	89	P
10	5925.00	7.32	54.21	61.53	68.20	-6.67	Peak	383	89	P
11	11570.00	15.42	33.76	49.18	54.00	-4.82	Average	142	149	P
12	11570.00	15.42	47.04	62.46	74.00	-11.54	Peak	142	149	P
13	17355.00	22.30	42.81	65.11	68.20	-3.09	Peak	100	141	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH165		

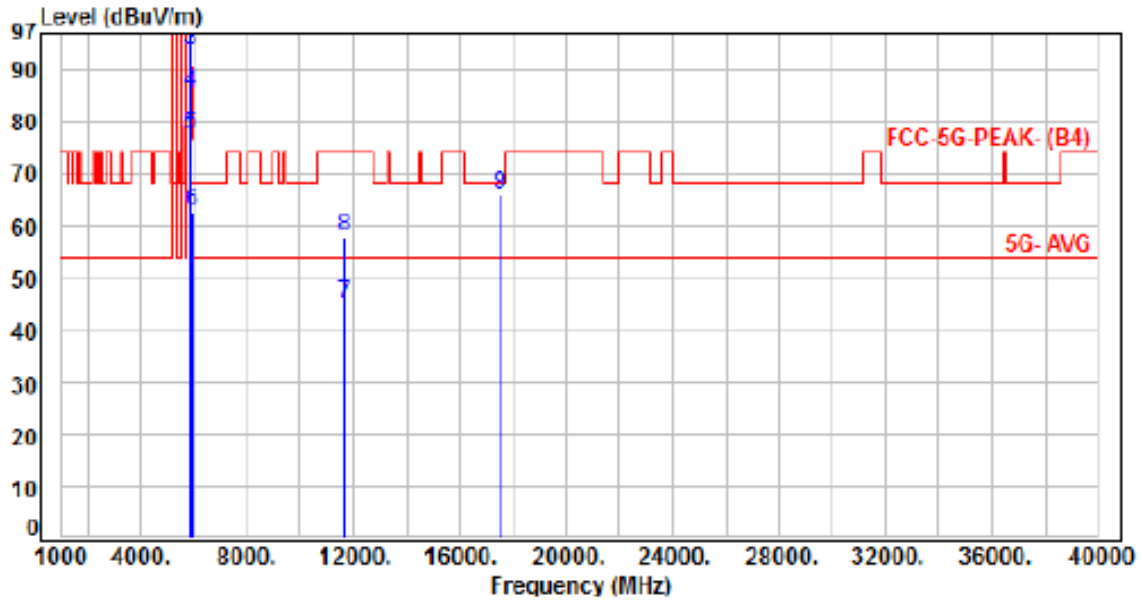


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	107.93	114.77	200.00	-85.23	Average	100	52	P
2	5825.00	6.84	118.50	125.34	200.00	-74.66	Peak	100	52	P
3	5850.00	6.86	86.70	93.56	122.20	-28.64	Peak	100	52	P
4	5855.00	6.91	78.84	85.75	110.80	-25.05	Peak	100	52	P
5	5875.00	7.08	70.34	77.42	105.20	-27.78	Peak	100	52	P
6	5925.00	7.32	55.39	62.71	68.20	-5.49	Peak	100	52	P
7	11650.00	15.64	29.49	45.13	54.00	-8.87	Average	100	255	P
8	11650.00	15.64	42.20	57.84	74.00	-16.16	Peak	100	255	P
9	17475.00	23.17	42.03	66.00	68.20	-2.20	Peak	100	135	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH165		

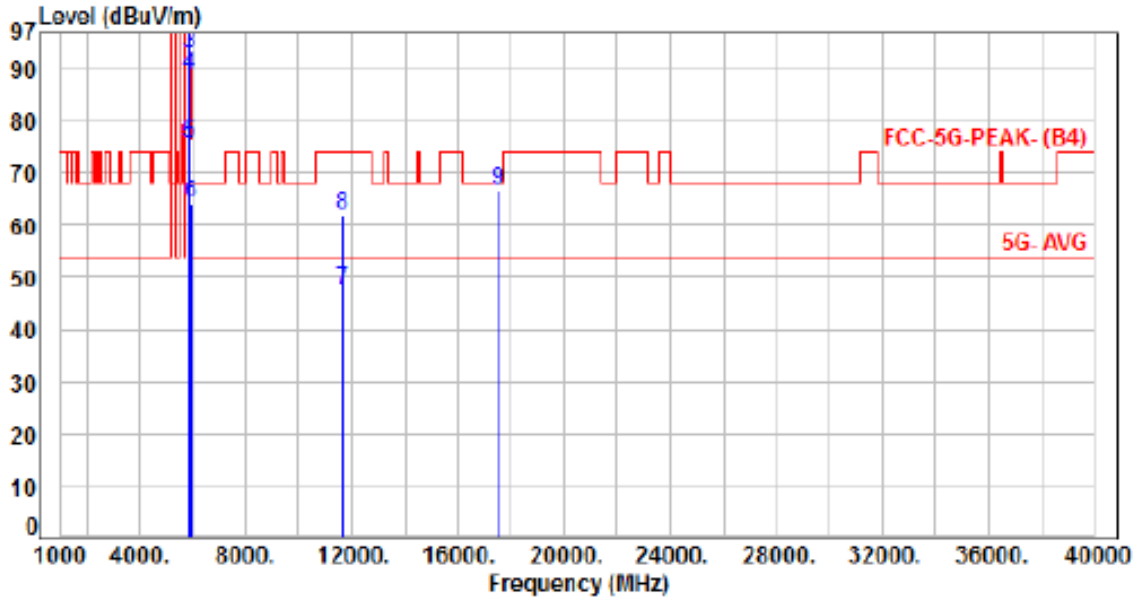

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	107.76	114.60	200.00	-85.40	Average	130	86	P
2	5825.00	6.84	118.02	124.86	200.00	-75.14	Peak	130	86	P
3	5850.00	6.86	86.16	93.02	122.20	-29.18	Peak	130	86	P
4	5855.00	6.91	81.87	88.78	110.80	-22.02	Peak	130	86	P
5	5875.00	7.08	68.67	75.75	105.20	-29.45	Peak	130	86	P
6	5925.00	7.32	56.67	63.99	68.20	-4.21	Peak	130	86	P
7	11650.00	15.64	32.12	47.76	54.00	-6.24	Average	185	146	P
8	11650.00	15.64	46.19	61.83	74.00	-12.17	Peak	185	146	P
9	17475.00	23.17	43.60	66.77	68.20	-1.43	Peak	100	140	P

Note: Level-Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, CH149		:

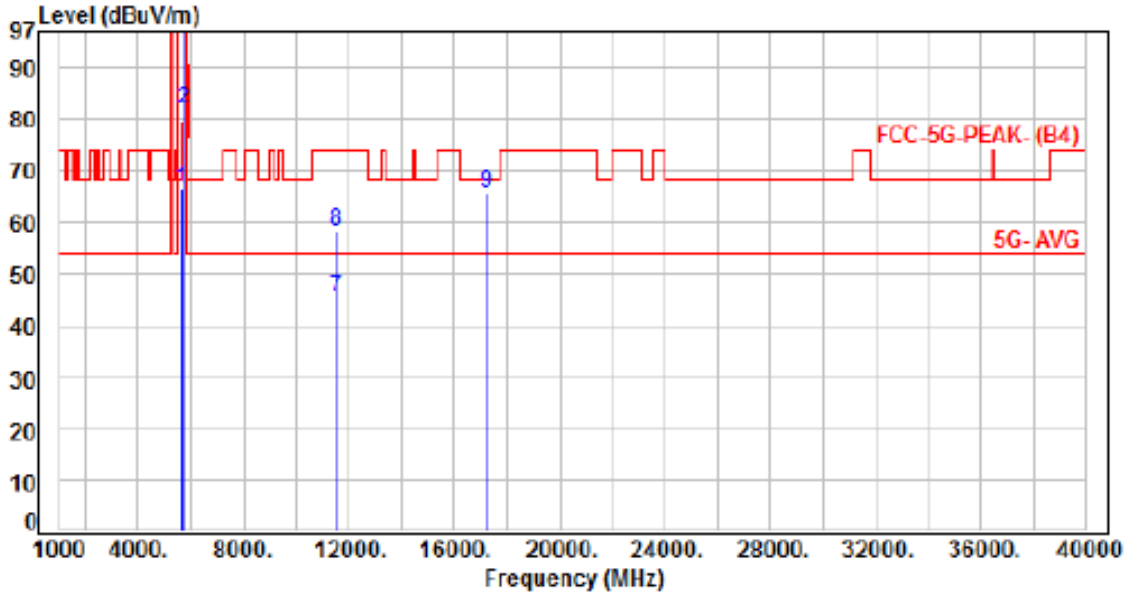

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	59.59	66.21	68.20	-1.99	Peak	106	142	P
2	5700.00	6.86	74.84	81.70	105.20	-23.50	Peak	106	142	P
3	5720.00	6.83	91.47	98.30	110.80	-12.50	Peak	106	142	P
4	5725.00	6.83	98.57	105.40	122.20	-16.80	Peak	106	142	P
5	5745.00	6.80	106.80	113.60	200.00	-86.40	Average	106	142	P
6	5745.00	6.80	119.30	126.10	200.00	-73.90	Peak	106	142	P
7	11490.00	15.18	30.34	45.52	54.00	-8.48	Average	100	249	P
8	11490.00	15.18	42.98	58.16	74.00	-15.84	Peak	100	249	P
9	17235.00	21.58	44.02	65.60	68.20	-2.60	Peak	100	309	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, CH149		:

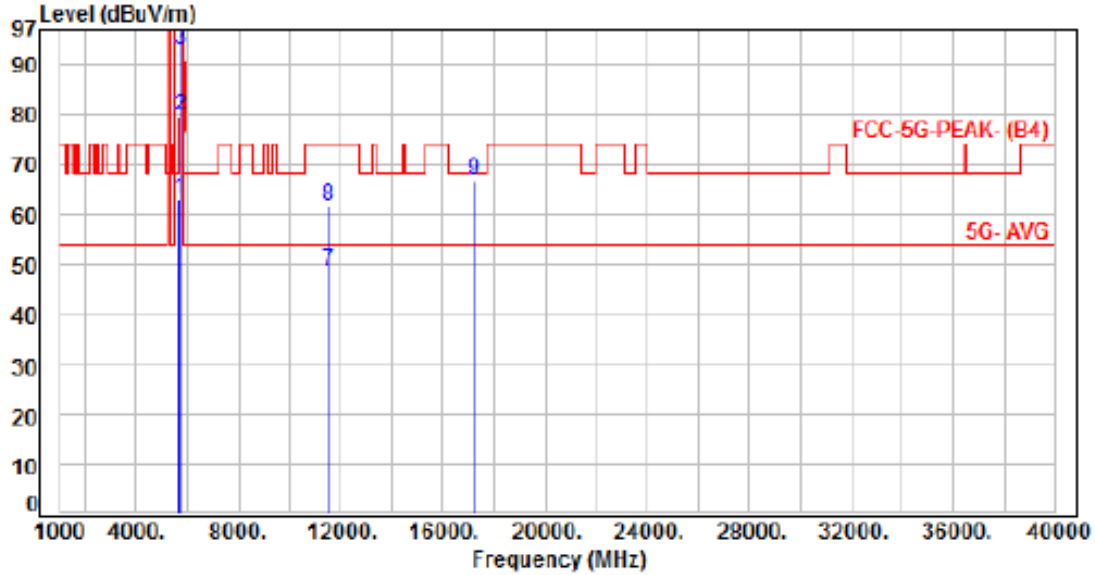

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	56.52	63.14	68.20	-5.06	Peak	106	51	P
2	5700.00	6.86	72.93	79.79	105.20	-25.41	Peak	106	51	P
3	5720.00	6.83	86.08	92.91	110.80	-17.89	Peak	106	51	P
4	5725.00	6.83	93.97	100.80	122.20	-21.40	Peak	106	51	P
5	5745.00	6.80	106.70	113.50	200.00	-86.50	Average	106	51	P
6	5745.00	6.80	118.81	125.61	200.00	-74.39	Peak	106	51	P
7	11490.00	15.18	33.47	48.65	54.00	-5.35	Average	178	154	P
8	11490.00	15.18	46.39	61.57	74.00	-12.43	Peak	178	154	P
9	17235.00	21.50	45.00	66.50	68.20	-1.62	Peak	200	53	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, CH157		

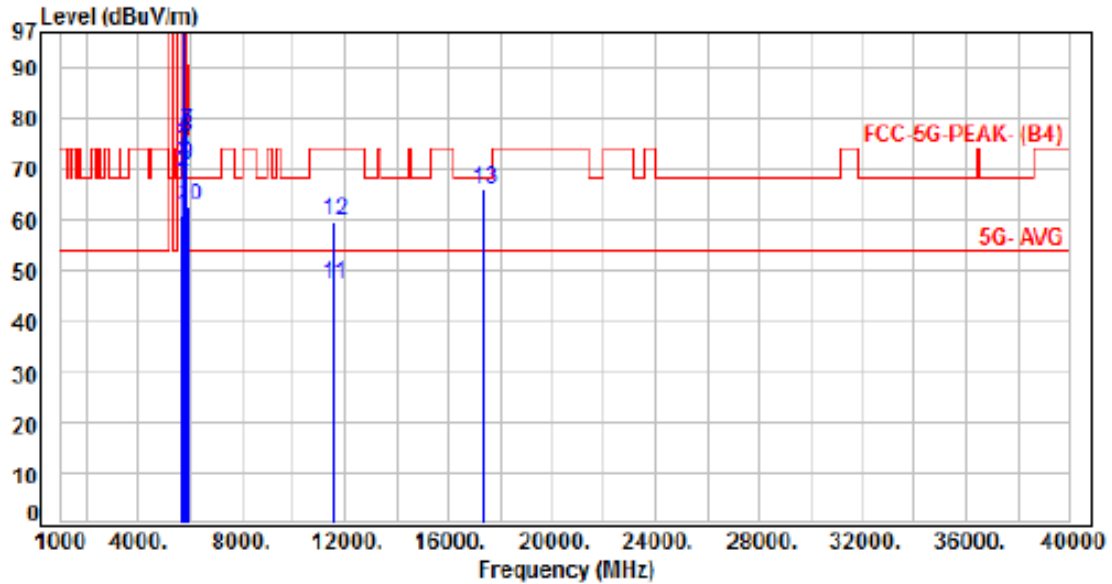

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	54.20	60.82	68.20	-7.38	Peak	100	43	P
2	5700.00	6.86	62.51	69.37	105.20	-35.83	Peak	100	43	P
3	5720.00	6.83	66.63	73.46	110.80	-37.34	Peak	100	43	P
4	5725.00	6.83	69.49	76.32	122.20	-45.88	Peak	100	43	P
5	5785.00	6.81	106.34	113.15	200.00	-86.85	Average	100	43	P
6	5785.00	6.81	116.49	123.30	200.00	-76.70	Peak	100	43	P
7	5850.00	6.86	70.69	77.55	122.20	-44.65	Peak	100	43	P
8	5855.00	6.91	69.35	76.26	110.80	-34.54	Peak	100	43	P
9	5875.00	7.08	63.89	70.97	105.20	-34.23	Peak	100	43	P
10	5925.00	7.32	55.31	62.63	68.20	-5.57	Peak	100	43	P
11	11570.00	15.42	31.75	47.17	54.00	-6.83	Average	100	253	P
12	11570.00	15.42	44.27	59.69	74.00	-14.31	Peak	100	253	P
13	17355.00	22.30	43.56	65.86	68.20	-2.34	Peak	100	355	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, CH157		:




No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	53.48	60.10	68.20	-8.10	Peak	100	15	P
2	5700.00	6.86	64.48	71.34	105.20	-33.86	Peak	100	15	P
3	5720.00	6.83	72.29	79.12	110.80	-31.68	Peak	100	15	P
4	5725.00	6.83	72.71	79.54	122.20	-42.66	Peak	100	15	P
5	5785.00	6.81	107.33	114.14	200.00	-85.86	Average	100	15	P
6	5785.00	6.81	119.45	126.26	200.00	-73.74	Peak	100	15	P
7	5850.00	6.86	73.96	80.82	122.20	-41.38	Peak	100	15	P
8	5855.00	6.91	70.97	77.88	110.80	-32.92	Peak	100	15	P
9	5875.00	7.08	69.42	76.50	105.20	-28.70	Peak	100	15	P
10	5925.00	7.32	57.67	64.99	68.20	-3.21	Peak	100	15	P
11	11570.00	15.42	35.51	50.93	54.00	-3.07	Average	175	152	P
12	11570.00	15.42	48.81	64.23	74.00	-9.77	Peak	175	152	P
13	17355.00	22.30	44.56	66.86	68.20	-1.34	Peak	174	57	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, CH165		

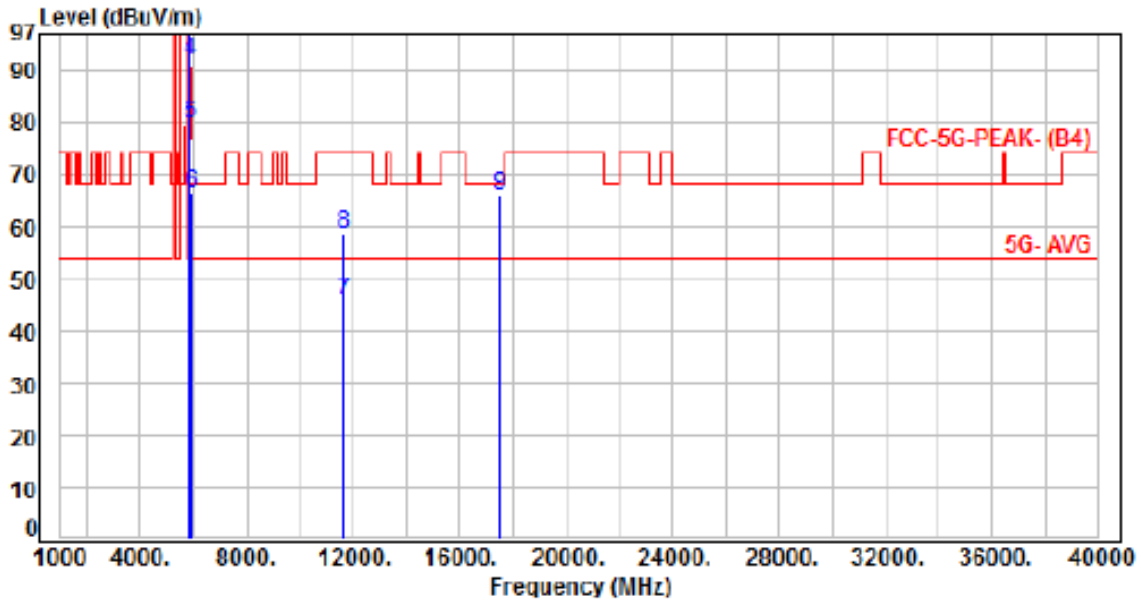


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	106.42	113.26	200.00	-86.74	Average	262	21	P
2	5825.00	6.84	119.51	126.35	200.00	-73.65	Peak	262	21	P
3	5850.00	6.86	95.43	102.29	122.20	-19.91	Peak	262	21	P
4	5855.00	6.91	84.92	91.83	110.80	-18.97	Peak	262	21	P
5	5875.00	7.08	72.59	79.67	105.20	-25.53	Peak	262	21	P
6	5925.00	7.32	59.00	66.32	68.20	-1.88	Peak	262	21	P
7	11650.00	15.64	29.97	45.61	54.00	-8.39	Average	100	249	P
8	11650.00	15.64	43.03	58.67	74.00	-15.33	Peak	100	249	P
9	17475.00	23.17	43.03	66.20	68.20	-2.00	Peak	100	316	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, CH165		:

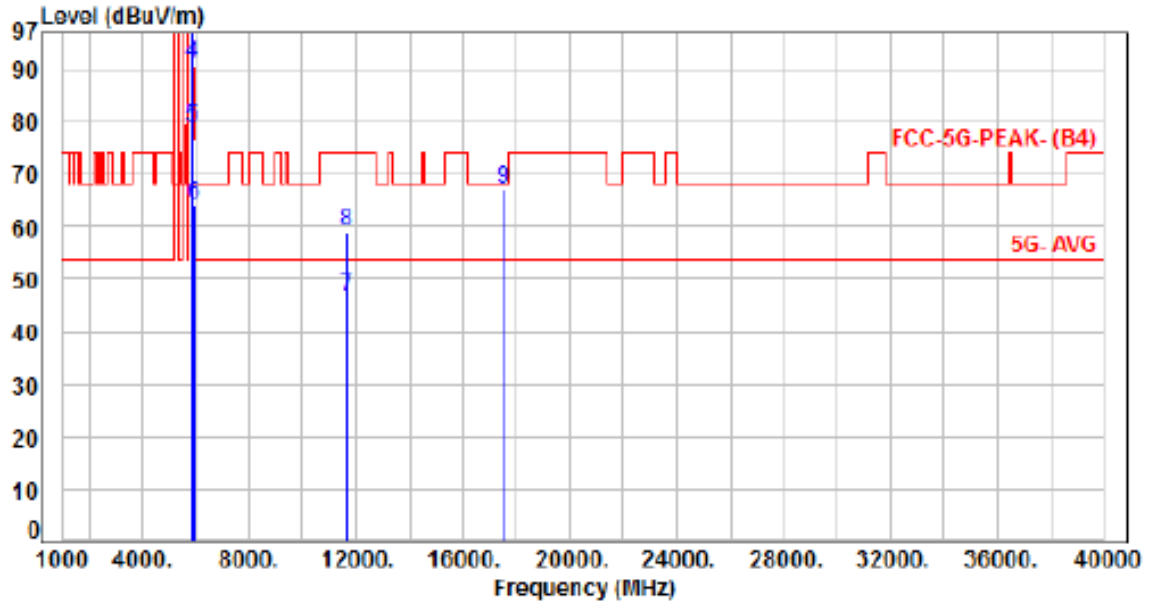


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	106.09	112.93	200.00	-87.07	Average	111	49	P
2	5825.00	6.84	118.24	125.08	200.00	-74.92	Peak	111	49	P
3	5850.00	6.86	94.76	101.62	122.20	-20.58	Peak	111	49	P
4	5855.00	6.91	84.11	91.02	110.80	-19.78	Peak	111	49	P
5	5875.00	7.08	71.84	78.92	105.20	-26.28	Peak	111	49	P
6	5925.00	7.32	56.94	64.26	68.20	-3.94	Peak	111	49	P
7	11650.00	15.64	30.86	46.50	54.00	-7.50	Average	186	140	P
8	11650.00	15.64	43.44	59.08	74.00	-14.92	Peak	186	140	P
9	17475.00	23.17	43.83	67.00	68.20	-1.20	Peak	100	142	P

Note: Level-Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 4, CH151		:

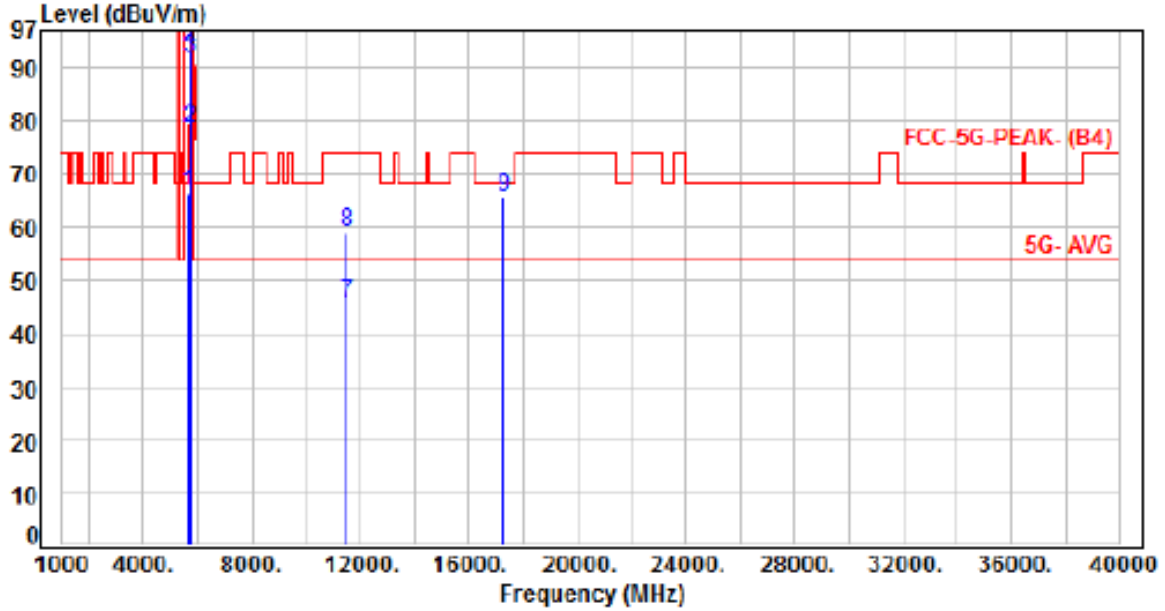


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	59.66	66.28	68.20	-1.92	Peak	252	17	P
2	5700.00	6.86	71.78	78.64	105.20	-26.56	Peak	252	17	P
3	5720.00	6.83	84.85	91.68	110.80	-19.12	Peak	252	17	P
4	5725.00	6.83	86.11	92.94	122.20	-29.26	Peak	252	17	P
5	5755.00	6.79	103.91	110.70	200.00	-89.30	Average	252	17	P
6	5755.00	6.79	115.25	122.04	200.00	-77.96	Peak	252	17	P
7	11510.00	15.24	30.57	45.81	54.00	-8.19	Average	100	68	P
8	11510.00	15.24	43.69	58.93	74.00	-15.07	Peak	100	68	P
9	17265.00	21.77	43.98	65.75	68.20	-2.45	Peak	100	68	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 4, CH151		:

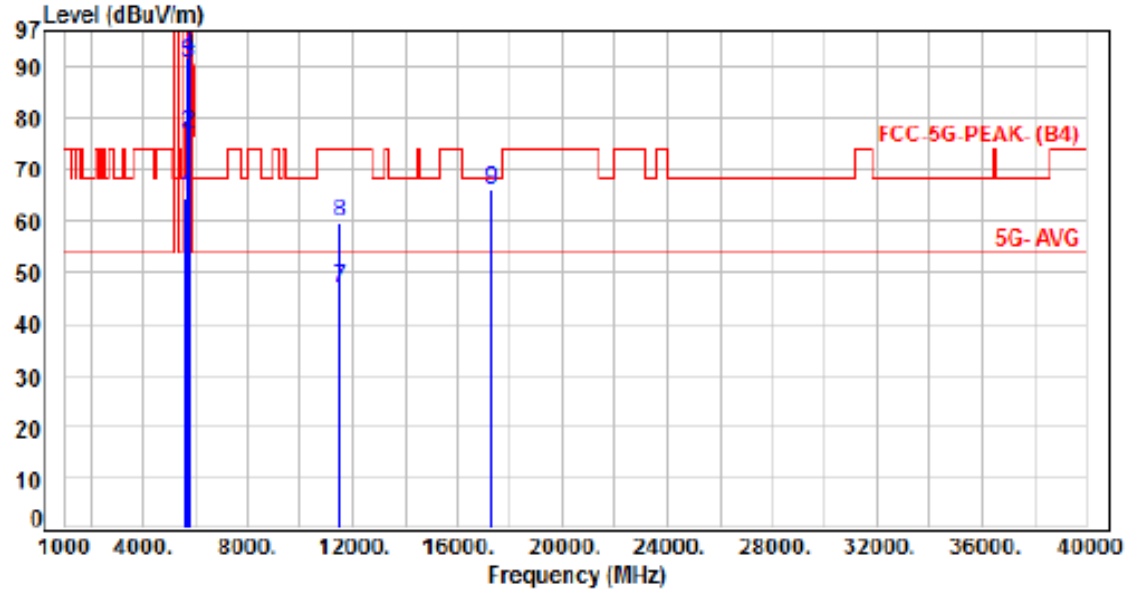


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	58.05	64.67	68.20	-3.53	Peak	100	52	P
2	5700.00	6.86	70.32	77.18	105.20	-28.02	Peak	100	52	P
3	5720.00	6.83	84.02	90.85	110.80	-19.95	Peak	100	52	P
4	5725.00	6.83	84.93	91.76	122.20	-30.44	Peak	100	52	P
5	5755.00	6.79	101.14	107.93	200.00	-92.07	Average	100	52	P
6	5755.00	6.79	113.80	120.59	200.00	-79.41	Peak	100	52	P
7	11510.00	15.24	31.50	46.74	54.00	-7.26	Average	182	163	P
8	11510.00	15.24	44.60	59.84	74.00	-14.16	Peak	182	163	P
9	17265.00	21.77	44.24	66.01	68.20	-2.19	Peak	100	305	P

Note: Level=Reading+Factor
Margin=Level-limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 4, CH159		

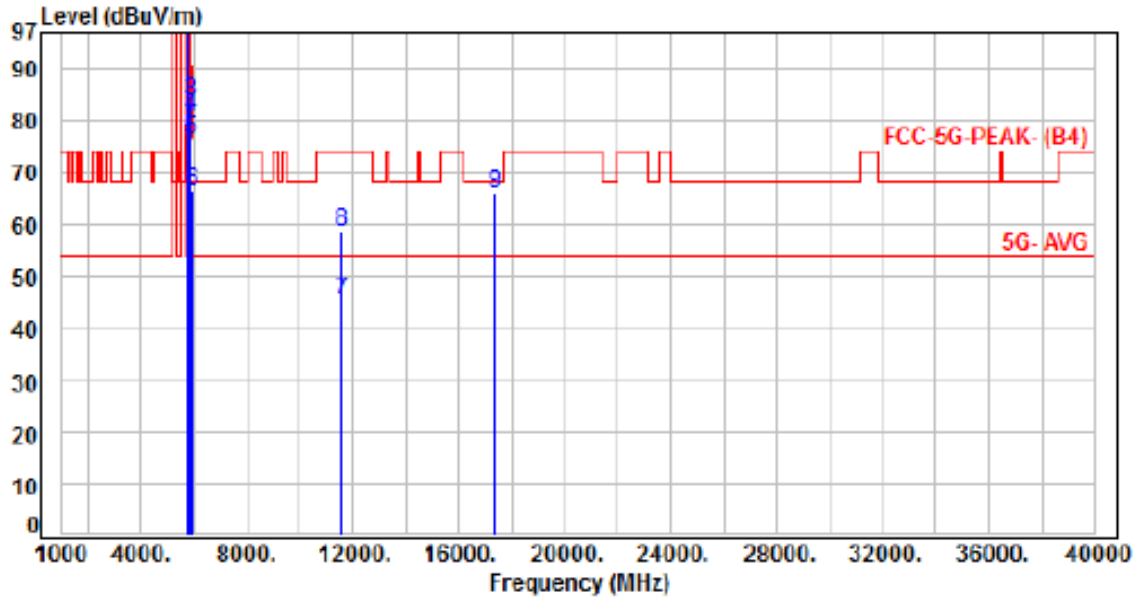


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	6.82	101.43	108.25	200.00	-91.75	Average	100	20	P
2	5795.00	6.82	114.08	120.90	200.00	-79.10	Peak	100	20	P
3	5850.00	6.86	76.80	83.66	122.20	-38.54	Peak	100	20	P
4	5855.00	6.91	73.87	80.78	110.80	-30.02	Peak	100	20	P
5	5875.00	7.08	69.30	76.38	105.20	-28.82	Peak	100	20	P
6	5925.00	7.32	59.03	66.35	68.20	-1.85	Peak	100	20	P
7	11590.00	15.47	30.07	45.54	54.00	-8.46	Average	100	267	P
8	11590.00	15.47	43.17	58.64	74.00	-15.36	Peak	100	267	P
9	17385.00	22.45	43.70	66.15	68.20	-2.05	Peak	100	296	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 4, CH159		:

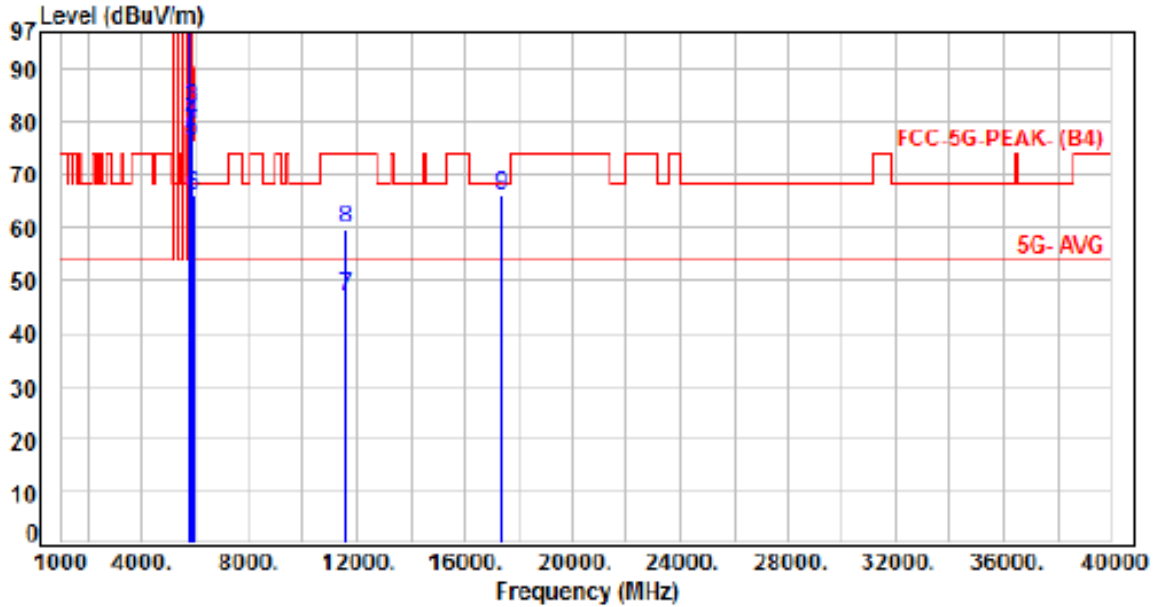


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	6.82	101.82	108.64	200.00	-91.36	Average	112	52	P
2	5795.00	6.82	114.04	120.86	200.00	-79.14	Peak	112	52	P
3	5850.00	6.86	75.92	82.78	122.20	-39.42	Peak	112	52	P
4	5855.00	6.91	73.21	80.12	110.80	-30.68	Peak	112	52	P
5	5875.00	7.08	69.39	76.47	105.20	-28.73	Peak	112	52	P
6	5925.00	7.32	58.76	66.08	68.20	-2.12	Peak	112	52	P
7	11590.00	15.47	31.52	46.99	54.00	-7.01	Average	186	148	P
8	11590.00	15.47	44.16	59.63	74.00	-14.37	Peak	186	148	P
9	17385.00	22.45	43.74	66.19	68.20	-2.01	Peak	100	329	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, CH155		

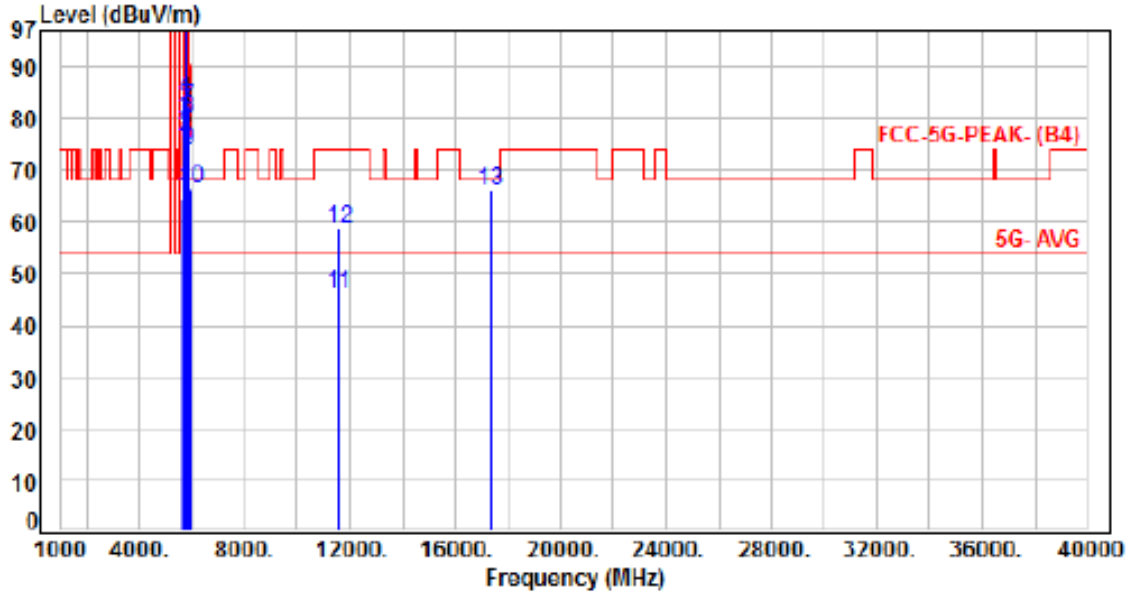


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	57.76	64.38	68.20	-3.82	Peak	100	18	P
2	5700.00	6.86	69.53	76.39	105.20	-28.81	Peak	100	18	P
3	5720.00	6.83	72.87	79.70	110.80	-31.10	Peak	100	18	P
4	5725.00	6.83	76.80	83.63	122.20	-38.57	Peak	100	18	P
5	5775.00	6.80	96.16	102.96	200.00	-97.04	Average	100	18	P
6	5775.00	6.80	108.30	115.10	200.00	-84.90	Peak	100	18	P
7	5850.00	6.86	75.22	82.08	122.20	-40.12	Peak	100	18	P
8	5855.00	6.91	73.15	80.06	110.80	-30.74	Peak	100	18	P
9	5875.00	7.08	66.77	73.85	105.20	-31.35	Peak	100	18	P
10	5925.00	7.32	59.11	66.43	68.20	-1.77	Peak	100	18	P
11	11550.00	15.36	30.79	46.15	54.00	-7.85	Average	100	18	P
12	11550.00	15.36	43.44	58.80	74.00	-15.20	Peak	100	18	P
13	17325.00	22.13	43.93	66.06	68.20	-2.14	Peak	100	349	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non-Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, CH155		:

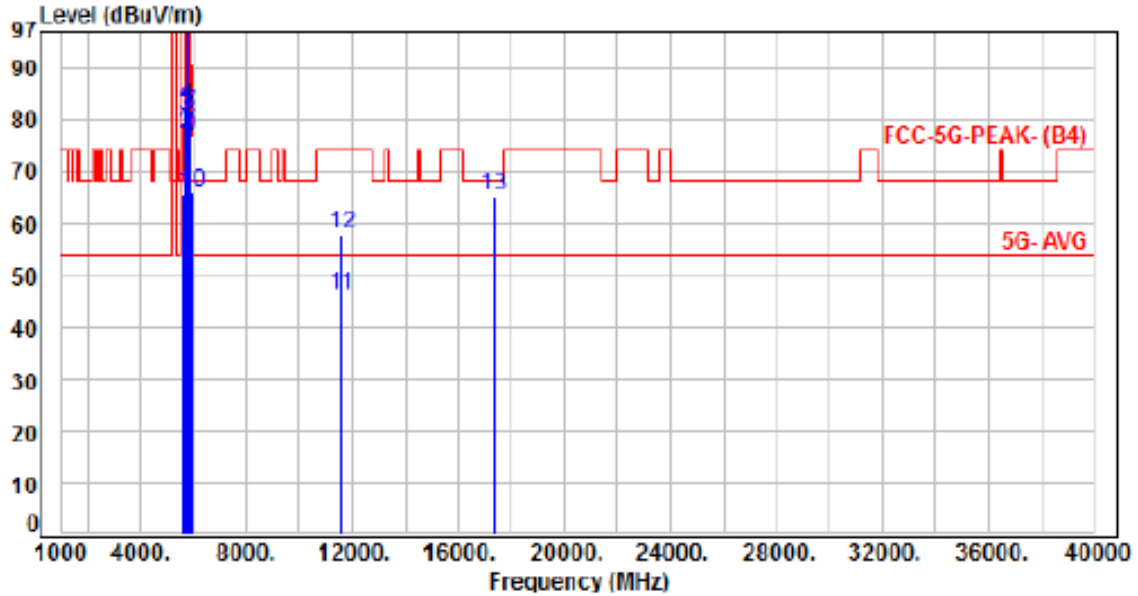


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	59.16	65.78	68.20	-2.42	Peak	100	53	P
2	5700.00	6.86	70.34	77.20	105.20	-28.00	Peak	100	53	P
3	5720.00	6.83	73.78	80.61	110.80	-30.19	Peak	100	53	P
4	5725.00	6.83	75.87	82.70	122.20	-39.50	Peak	100	53	P
5	5775.00	6.80	95.89	102.69	200.00	-97.31	Average	100	53	P
6	5775.00	6.80	107.61	114.41	200.00	-85.59	Peak	100	53	P
7	5850.00	6.86	74.31	81.17	122.20	-41.03	Peak	100	53	P
8	5855.00	6.91	72.72	79.63	110.80	-31.17	Peak	100	53	P
9	5875.00	7.08	69.50	76.58	105.20	-28.62	Peak	100	53	P
10	5925.00	7.32	58.63	65.95	68.20	-2.25	Peak	100	53	P
11	11550.00	15.36	30.67	46.03	54.00	-7.97	Average	100	247	P
12	11550.00	15.36	42.69	58.05	74.00	-15.95	Peak	100	247	P
13	17325.00	22.13	43.28	65.41	68.20	-2.79	Peak	100	324	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 1, CH36		

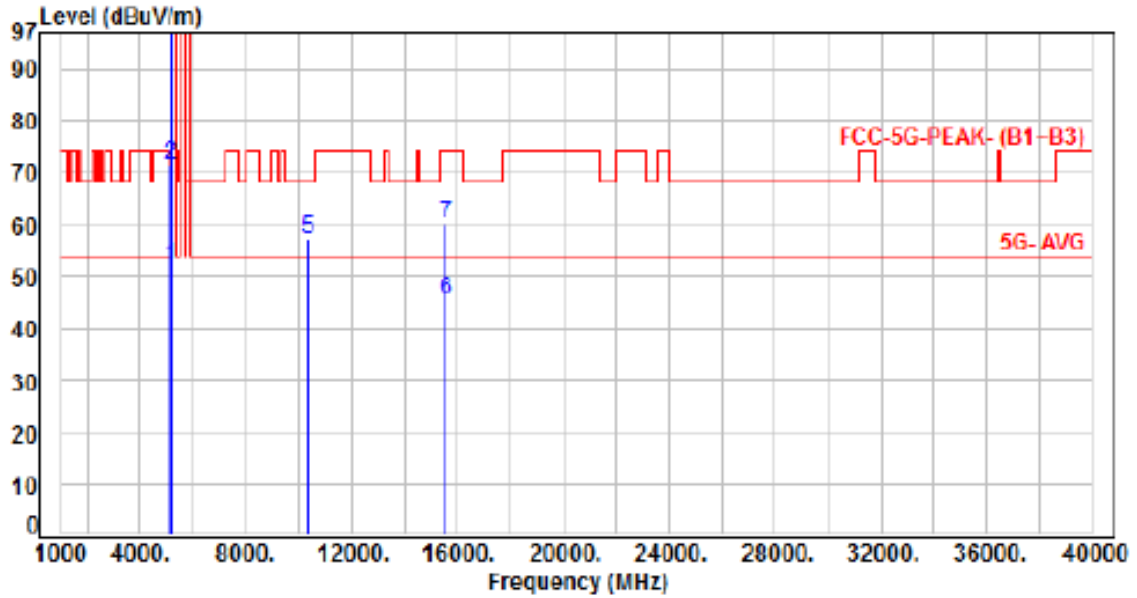

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	45.87	52.08	54.00	-1.92	Average	150	137	P
2	5150.00	6.21	65.38	71.59	74.00	-2.41	Peak	150	137	P
3	5180.00	6.29	101.83	108.12	200.00	-91.88	Average	150	137	P
4	5180.00	6.29	115.15	121.44	200.00	-78.56	Peak	150	137	P
5	10360.00	13.73	43.49	57.22	68.20	-10.98	Peak	100	62	P
6	15540.00	16.41	28.96	45.37	54.00	-8.63	Average	100	144	P
7	15540.00	16.41	43.57	59.98	74.00	-14.02	Peak	100	144	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 1, CH36		:

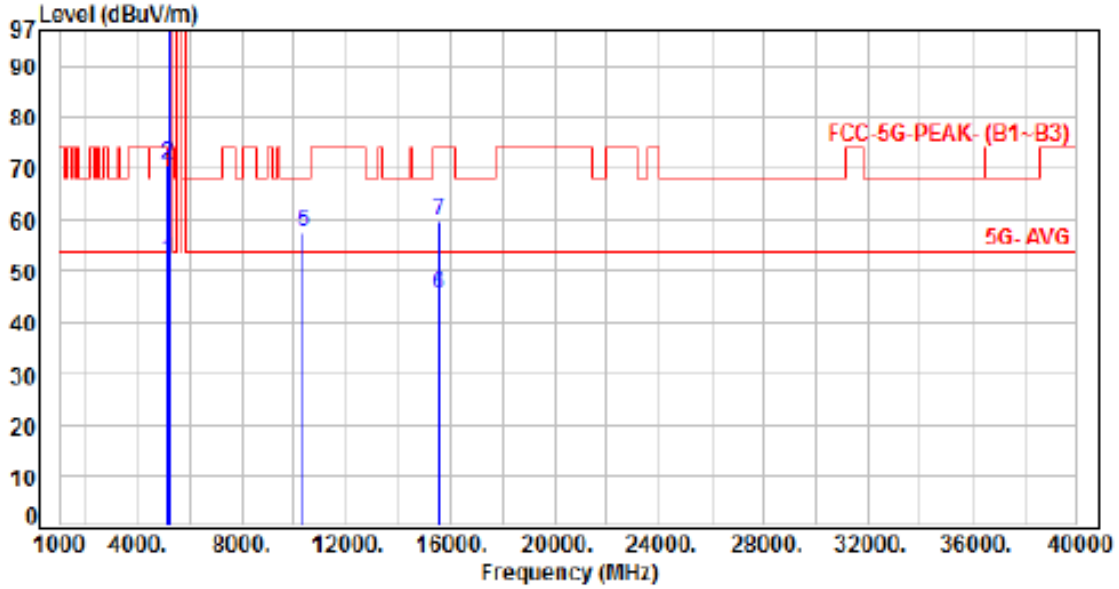


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	45.81	52.02	54.00	-1.98	Average	100	92	P
2	5150.00	6.21	64.58	70.79	74.00	-3.21	Peak	100	92	P
3	5180.00	6.29	102.02	108.31	200.00	-91.69	Average	100	92	P
4	5180.00	6.29	115.20	121.49	200.00	-78.51	Peak	100	92	P
5	10360.00	13.73	43.65	57.38	68.20	-10.82	Peak	100	79	P
6	15540.00	16.41	28.99	45.40	54.00	-8.60	Average	100	103	P
7	15540.00	16.41	43.28	59.69	74.00	-14.31	Peak	100	103	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 1, CH40		

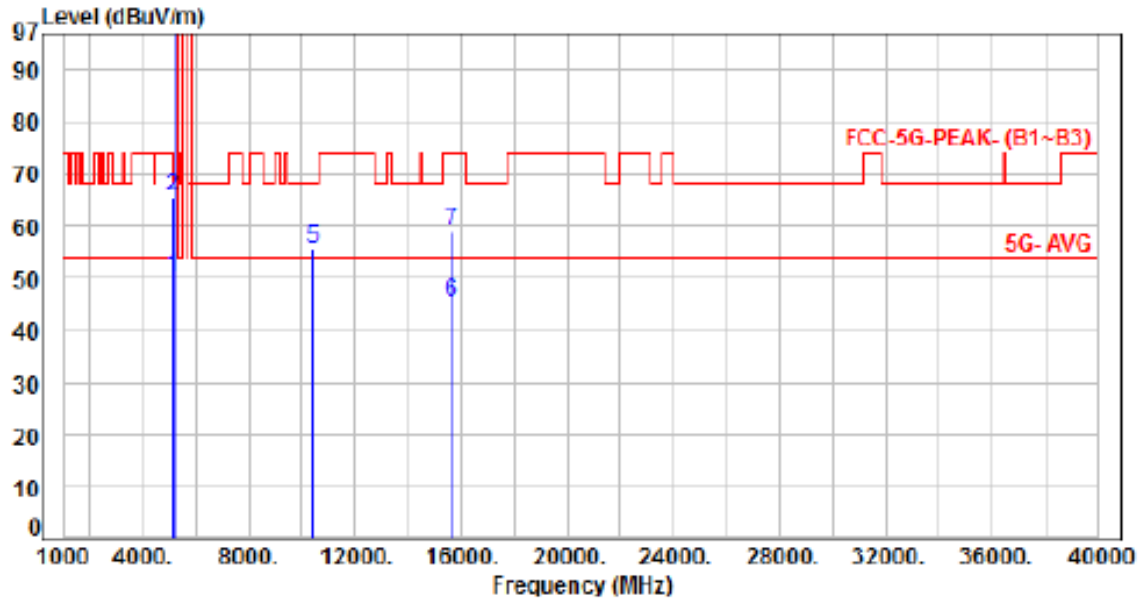


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	43.77	49.98	54.00	-4.02	Average	104	139	P
2	5150.00	6.21	59.27	65.48	74.00	-8.52	Peak	104	139	P
3	5200.00	6.34	103.71	110.05	200.00	-89.95	Average	104	139	P
4	5200.00	6.34	116.79	123.13	200.00	-76.87	Peak	104	139	P
5	10400.00	13.77	42.01	55.78	68.20	-12.42	Peak	100	63	P
6	15600.00	16.33	28.94	45.27	54.00	-8.73	Average	100	101	P
7	15600.00	16.33	42.61	58.94	74.00	-15.06	Peak	100	101	P

Note: Level-Reading+Factor
 Margin-Level-Limit
 Factor-Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 1, CH40		

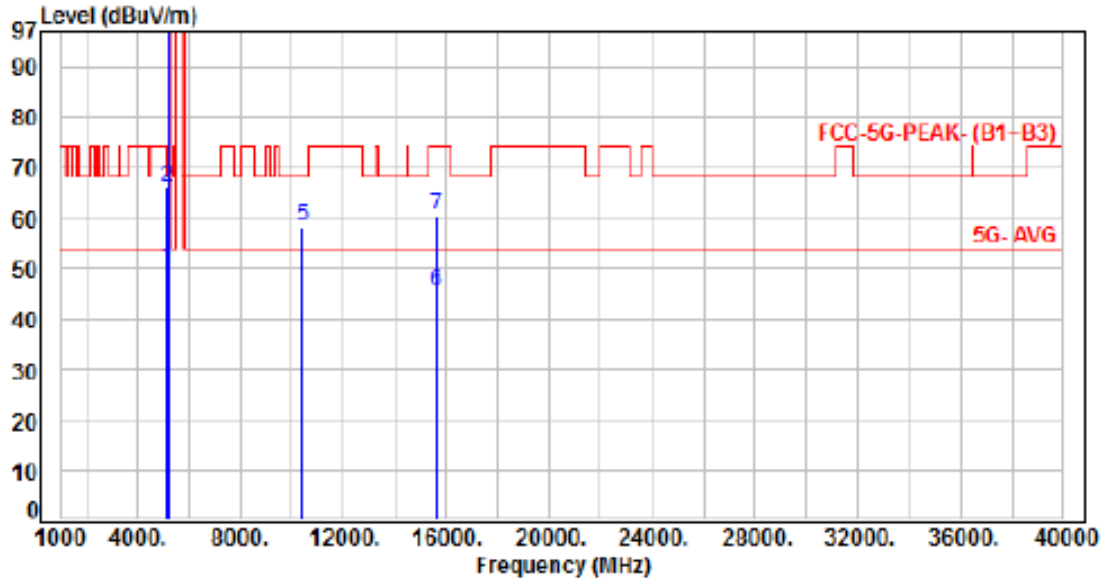

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	43.60	49.81	54.00	-4.19	Average	100	110	P
2	5150.00	6.21	59.71	65.92	74.00	-8.08	Peak	100	110	P
3	5200.00	6.34	104.58	110.92	200.00	-89.08	Average	100	110	P
4	5200.00	6.34	118.21	124.55	200.00	-75.45	Peak	100	110	P
5	10400.00	13.77	44.39	58.16	68.20	-10.04	Peak	100	76	P
6	15600.00	16.33	29.01	45.34	54.00	-8.66	Average	100	107	P
7	15600.00	16.33	44.06	60.39	74.00	-13.61	Peak	100	107	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 1, CH48		

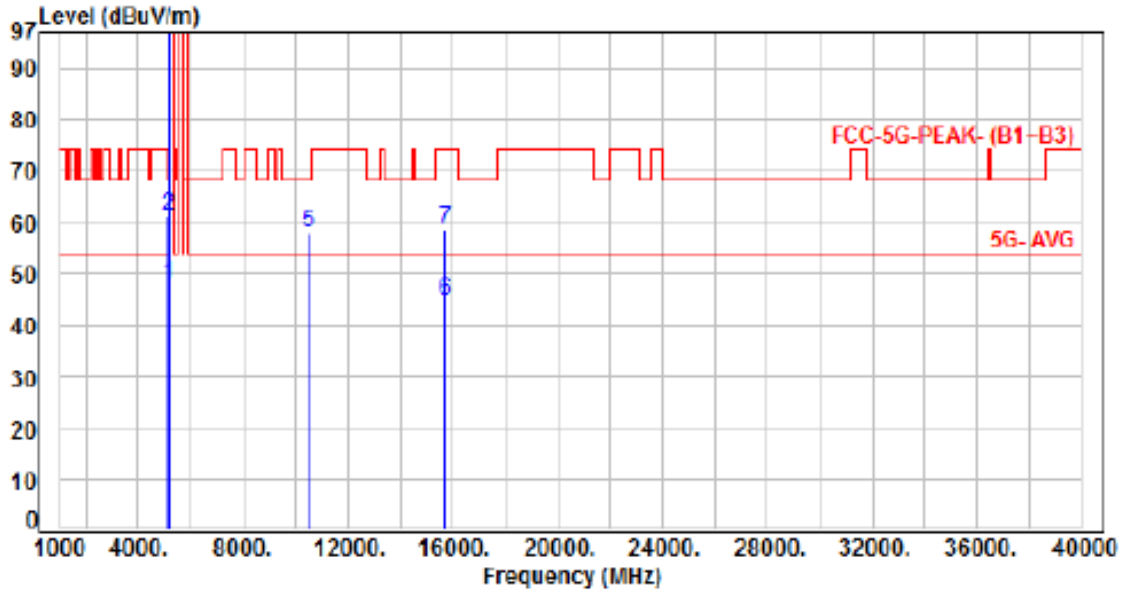


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	41.85	48.06	54.00	-5.94	Average	135	135	P
2	5150.00	6.21	55.20	61.41	74.00	-12.59	Peak	135	135	P
3	5240.00	6.46	103.56	110.02	200.00	-89.98	Average	135	135	P
4	5240.00	6.46	116.47	122.93	200.00	-77.07	Peak	135	135	P
5	10480.00	13.89	43.87	57.76	68.20	-10.44	Peak	100	61	P
6	15720.00	15.62	28.91	44.53	54.00	-9.47	Average	100	101	P
7	15720.00	15.62	43.02	58.64	74.00	-15.36	Peak	100	101	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 1, CH48		:

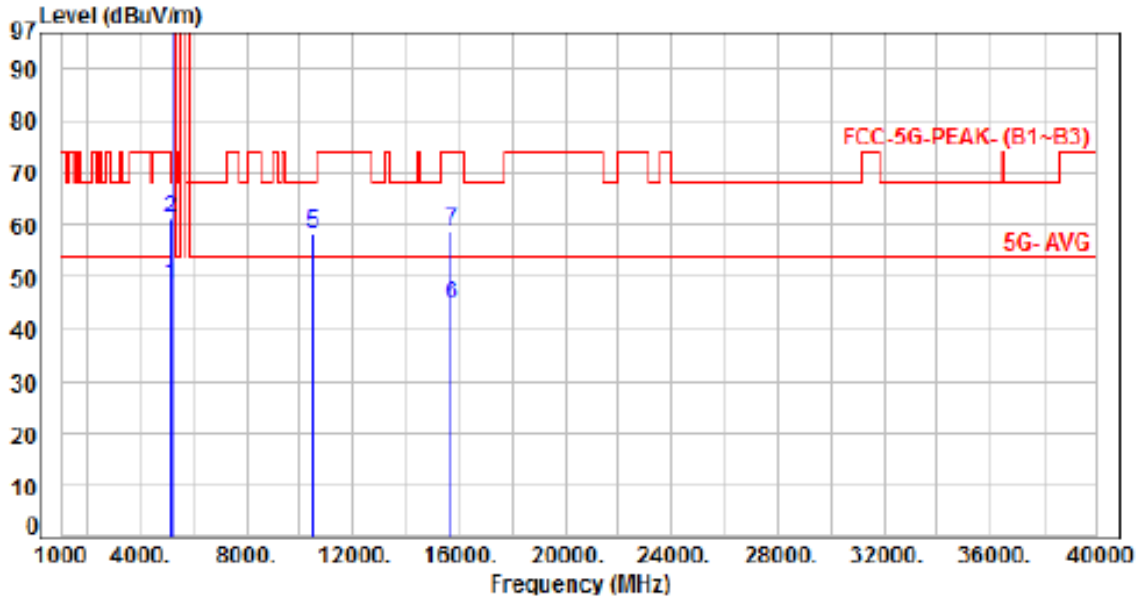


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	41.93	48.14	54.00	-5.86	Average	100	86	P
2	5150.00	6.21	54.86	61.07	74.00	-12.93	Peak	100	86	P
3	5240.00	6.46	105.21	111.67	200.00	-88.33	Average	100	86	P
4	5240.00	6.46	117.65	124.11	200.00	-75.89	Peak	100	86	P
5	10480.00	13.89	44.22	58.11	68.20	-10.09	Peak	100	65	P
6	15720.00	15.62	28.97	44.59	54.00	-9.41	Average	100	107	P
7	15720.00	15.62	42.88	58.50	74.00	-15.50	Peak	100	107	P

Note: Level-Reading+Factor
Margin-Level-Limit
Factor-Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 1, CH38		

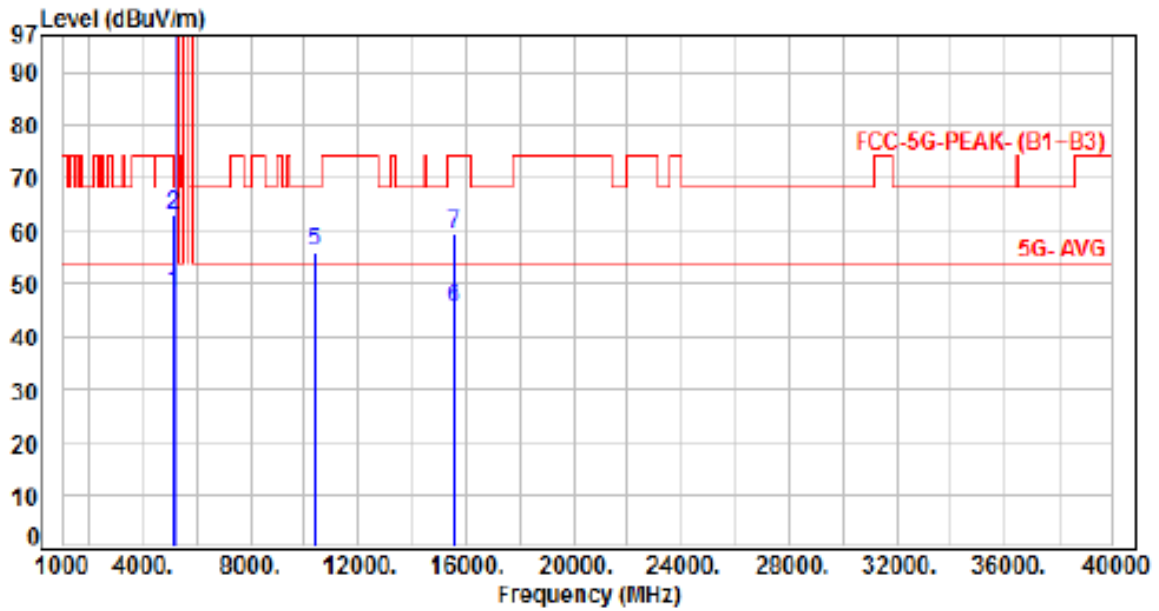

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	42.16	48.37	54.00	-5.63	Average	120	144	P
2	5150.00	6.21	56.76	62.97	74.00	-11.03	Peak	120	144	P
3	5190.00	6.32	95.30	101.62	200.00	-98.38	Average	120	144	P
4	5190.00	6.32	109.02	115.34	200.00	-84.66	Peak	120	144	P
5	10380.00	13.76	42.18	55.94	68.20	-12.26	Peak	100	67	P
6	15570.00	16.37	28.94	45.31	54.00	-8.69	Average	100	110	P
7	15570.00	16.37	43.11	59.48	74.00	-14.52	Peak	100	110	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 1, CH38		:

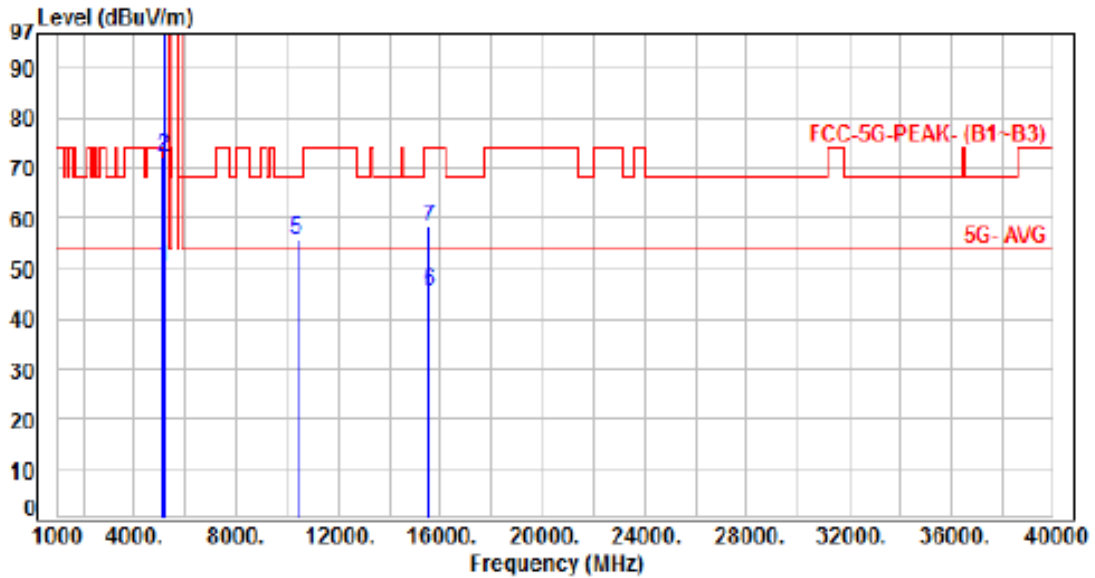


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	43.93	50.14	54.00	-3.86	Average	142	109	P
2	5150.00	6.21	66.07	72.28	74.00	-1.72	Peak	142	109	P
3	5190.00	6.32	97.07	103.39	200.00	-96.61	Average	142	109	P
4	5190.00	6.32	110.14	116.46	200.00	-83.54	Peak	142	109	P
5	10380.00	13.76	42.11	55.87	68.20	-12.33	Peak	100	42	P
6	15570.00	16.37	29.06	45.43	54.00	-8.57	Average	100	104	P
7	15570.00	16.37	42.01	58.38	74.00	-15.62	Peak	100	104	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 1, CH46		:

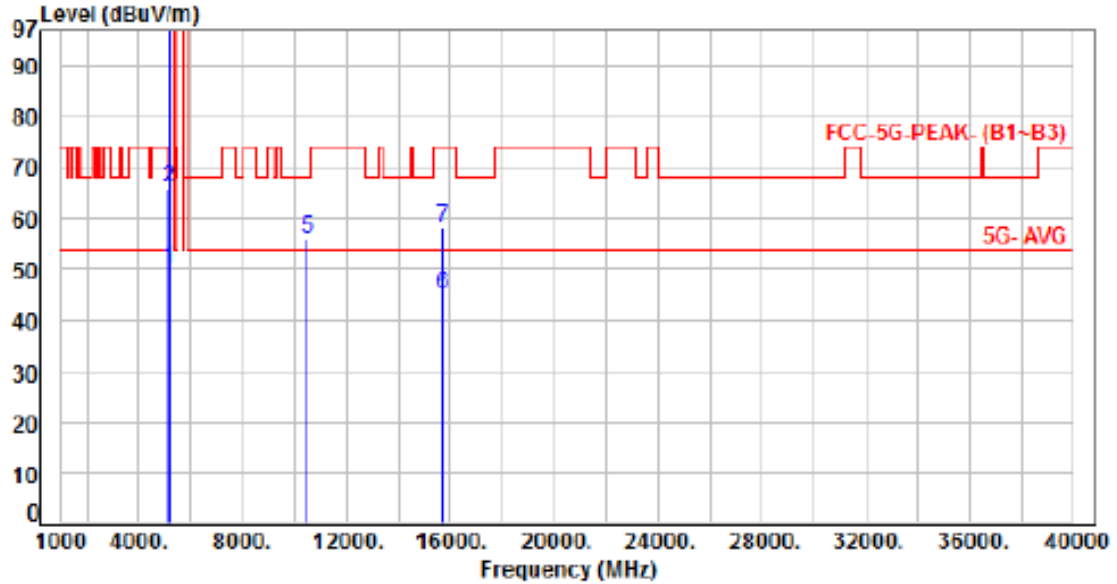


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	43.78	49.99	54.00	-4.01	Average	119	140	P
2	5150.00	6.21	59.66	65.87	74.00	-8.13	Peak	119	140	P
3	5230.00	6.44	100.06	106.50	200.00	-93.50	Average	119	140	P
4	5230.00	6.44	113.49	119.93	200.00	-80.07	Peak	119	140	P
5	10460.00	13.86	42.34	56.20	68.20	-12.00	Peak	100	59	P
6	15690.00	15.67	29.17	44.84	54.00	-9.16	Average	100	107	P
7	15690.00	15.67	42.59	58.26	74.00	-15.74	Peak	100	107	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 1, CH46		:

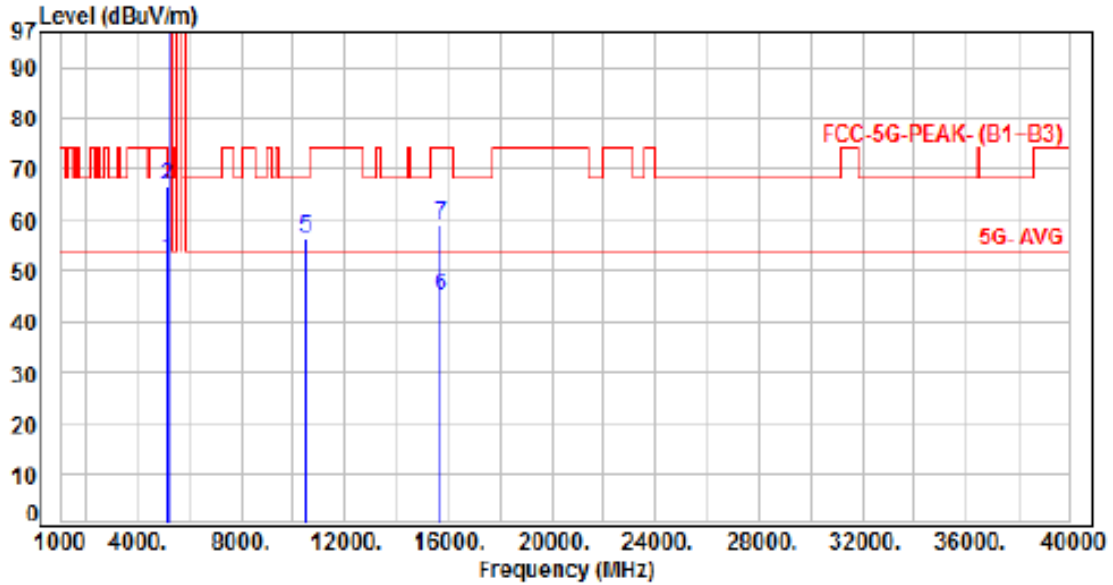


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	45.97	52.18	54.00	-1.82	Average	103	72	P
2	5150.00	6.21	60.62	66.83	74.00	-7.17	Peak	103	72	P
3	5230.00	6.44	101.19	107.63	200.00	-92.37	Average	103	72	P
4	5230.00	6.44	115.21	121.65	200.00	-78.35	Peak	103	72	P
5	10460.00	13.86	42.40	56.26	68.20	-11.94	Peak	100	49	P
6	15690.00	15.67	29.37	45.04	54.00	-8.96	Average	100	100	P
7	15690.00	15.67	43.30	58.97	74.00	-15.03	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 1, CH42		

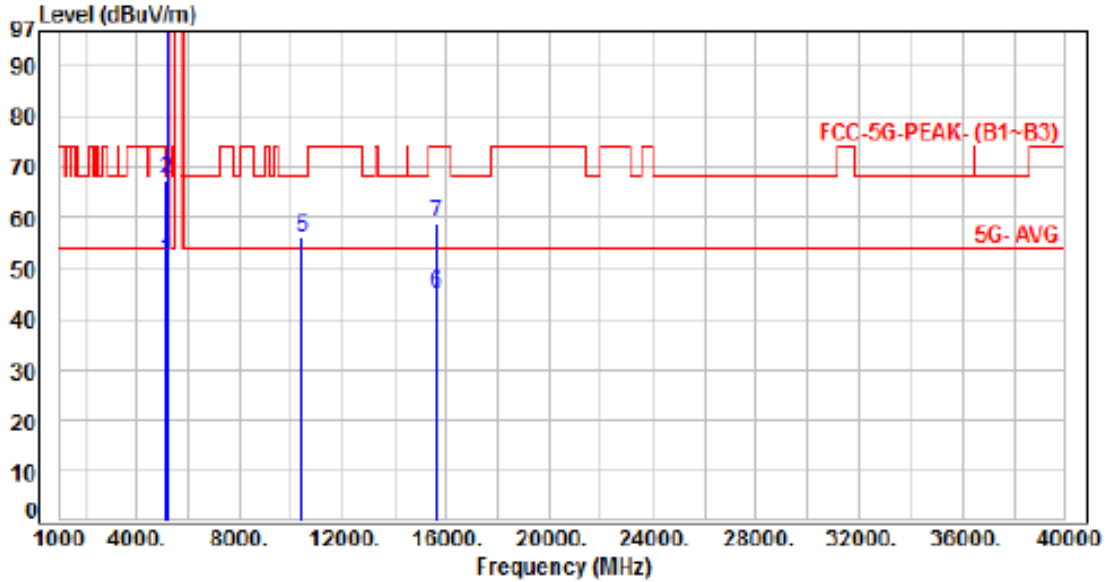


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	45.56	51.77	54.00	-2.23	Average	131	140	P
2	5150.00	6.21	61.32	67.53	74.00	-6.47	Peak	131	140	P
3	5210.00	6.38	93.34	99.72	200.00	-100.28	Average	131	140	P
4	5210.00	6.38	106.71	113.09	200.00	-86.91	Peak	131	140	P
5	10420.00	13.80	42.33	56.13	68.20	-12.07	Peak	100	64	P
6	15630.00	16.10	29.04	45.14	54.00	-8.86	Average	100	121	P
7	15630.00	16.10	43.05	59.15	74.00	-14.85	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 1, CH42		:

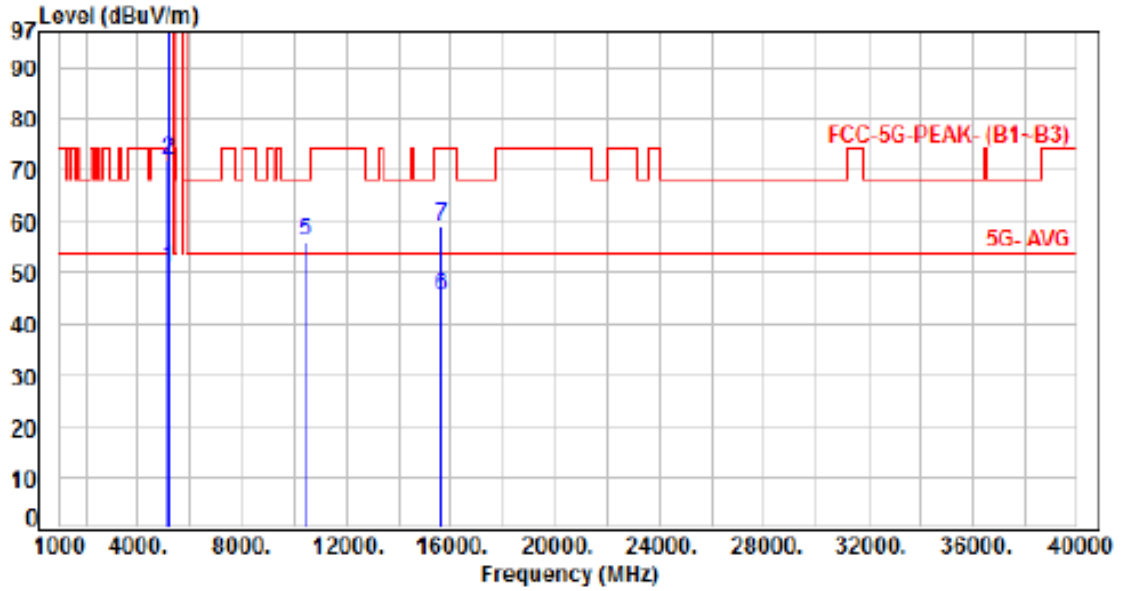


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	44.60	50.81	54.00	-3.19	Average	100	99	P
2	5150.00	6.21	65.83	72.04	74.00	-1.96	Peak	100	99	P
3	5210.00	6.38	94.03	100.41	200.00	-99.59	Average	100	99	P
4	5210.00	6.38	100.70	115.08	200.00	-84.92	Peak	100	99	P
5	10420.00	13.80	42.41	56.21	68.20	-11.99	Peak	100	79	P
6	15630.00	16.10	29.12	45.22	54.00	-8.78	Average	100	113	P
7	15630.00	16.10	42.87	58.97	74.00	-15.03	Peak	100	113	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 1, CH50		:

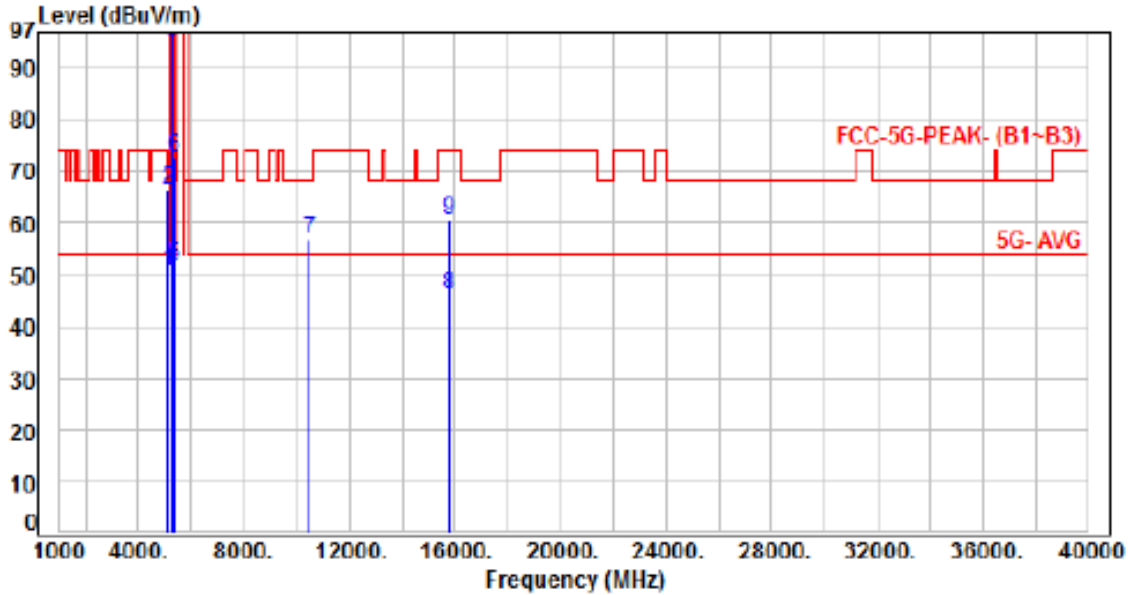


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	44.47	50.68	54.00	-3.32	Average	100	154	P
2	5150.00	6.21	60.11	66.32	74.00	-7.68	Peak	100	154	P
3	5250.00	6.49	88.62	95.11	200.00	-104.89	Average	100	154	P
4	5250.00	6.49	103.19	109.68	200.00	-90.32	Peak	100	154	P
5	5350.00	6.57	44.96	51.53	54.00	-2.47	Average	100	154	P
6	5350.00	6.57	66.00	72.57	74.00	-1.43	Peak	100	154	P
7	10500.00	13.92	42.83	56.75	68.20	-11.45	Peak	100	89	P
8	15750.00	15.67	30.32	45.99	54.00	-8.01	Average	100	135	P
9	15750.00	15.67	44.75	60.42	74.00	-13.58	Peak	100	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 1, CH50		

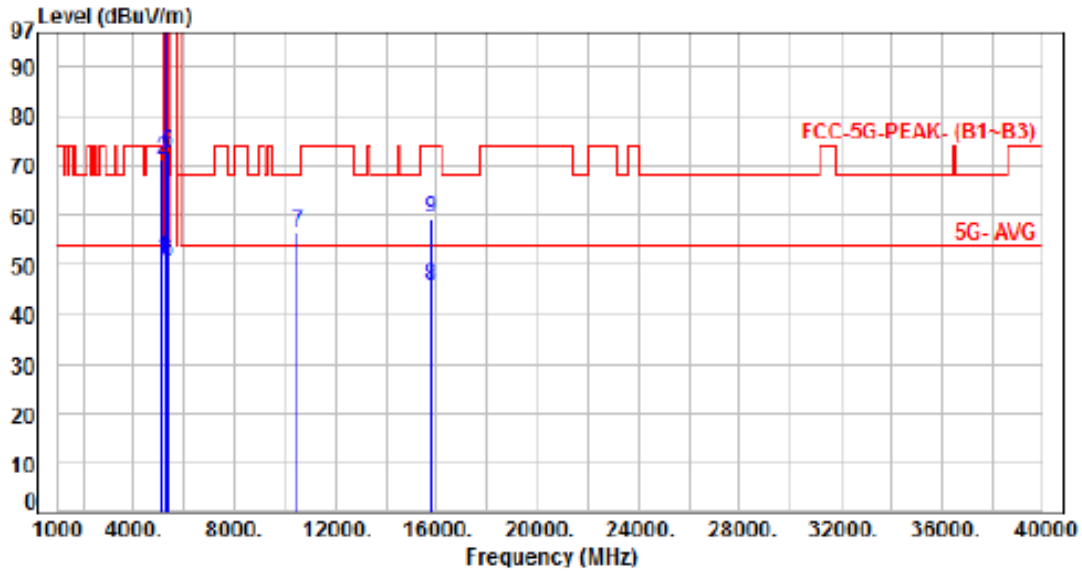


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.21	44.96	51.17	54.00	-2.83	Average	146	100	P
2	5150.00	6.21	65.06	71.27	74.00	-2.73	Peak	146	100	P
3	5250.00	6.49	92.20	98.69	200.00	-101.31	Average	146	100	P
4	5250.00	6.49	105.47	111.96	200.00	-88.04	Peak	146	100	P
5	5350.00	6.57	43.94	50.51	54.00	-3.49	Average	146	100	P
6	5350.00	6.57	65.95	72.52	74.00	-1.48	Peak	146	100	P
7	10500.00	13.92	42.42	56.34	68.20	-11.86	Peak	100	85	P
8	15750.00	15.67	30.25	45.92	54.00	-8.08	Average	100	195	P
9	15750.00	15.67	43.82	59.49	74.00	-14.51	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 2, CH52		:

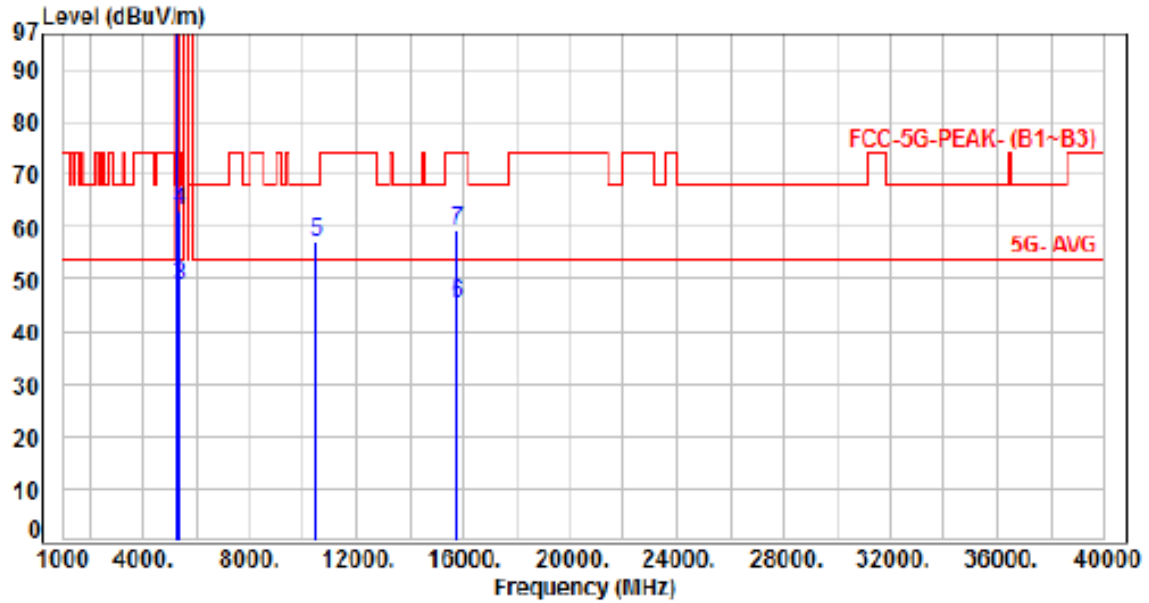


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.52	104.51	111.03	200.00	-88.97	Average	135	132	P
2	5260.00	6.52	117.03	123.55	200.00	-76.45	Peak	135	132	P
3	5350.00	6.57	42.21	48.78	54.00	-5.22	Average	135	132	P
4	5350.00	6.57	56.41	62.98	74.00	-11.02	Peak	135	132	P
5	10520.00	13.94	43.30	57.24	68.20	-10.96	Peak	100	63	P
6	15780.00	15.71	29.52	45.23	54.00	-8.77	Average	100	142	P
7	15780.00	15.71	43.61	59.32	74.00	-14.68	Peak	100	142	P

Note: Level=Reading+Factor
 Margin=Level-limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 2, CH52		:

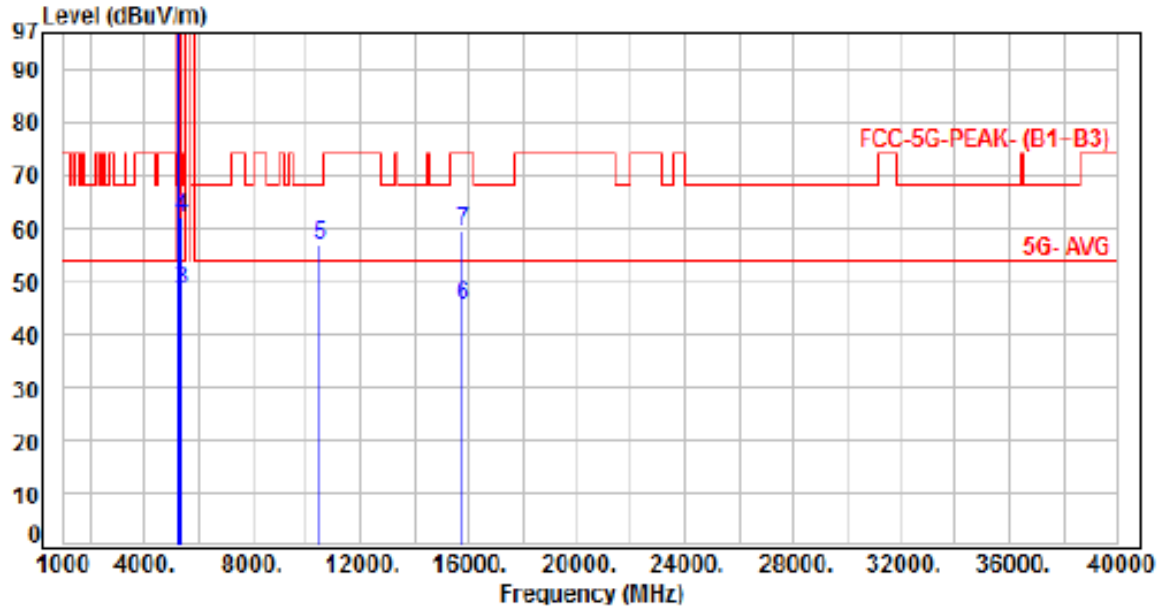

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.52	103.66	110.18	200.00	-89.82	Average	113	105	P
2	5260.00	6.52	117.65	124.17	200.00	-75.83	Peak	113	105	P
3	5350.00	6.57	41.57	48.14	54.00	-5.86	Average	113	105	P
4	5350.00	6.57	55.29	61.86	74.00	-12.14	Peak	113	105	P
5	10520.00	13.94	42.98	56.92	68.20	-11.28	Peak	100	66	P
6	15780.00	15.71	29.55	45.26	54.00	-8.74	Average	100	132	P
7	15780.00	15.71	43.53	59.24	74.00	-14.76	Peak	100	132	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 2, CH60		

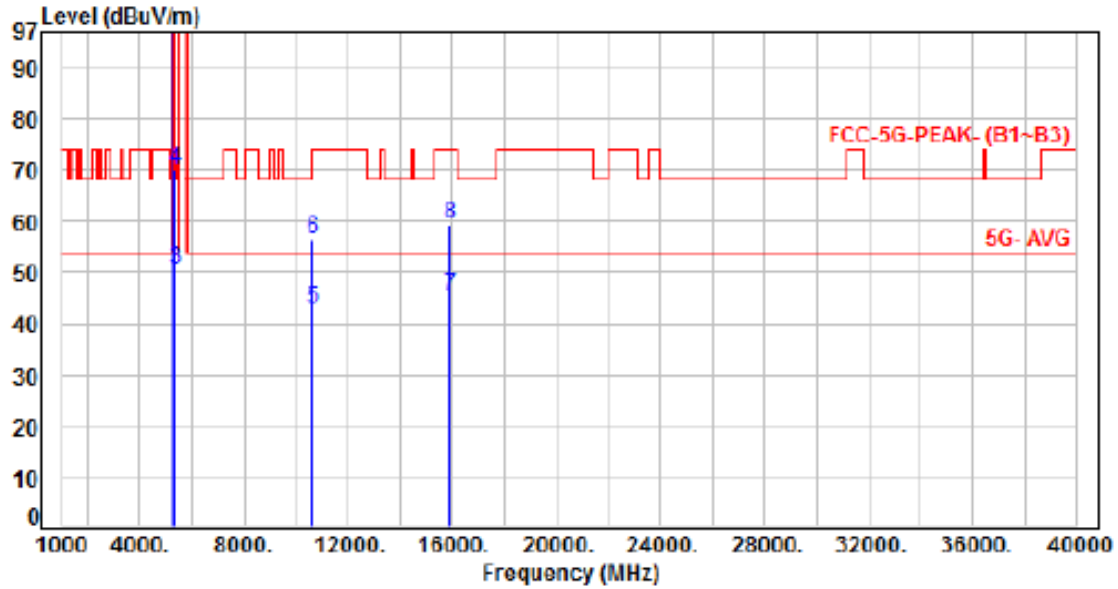

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	6.64	103.14	109.78	200.00	-90.22	Average	120	131	P
2	5300.00	6.64	116.88	123.52	200.00	-76.48	Peak	120	131	P
3	5350.00	6.57	44.06	50.63	54.00	-3.37	Average	120	131	P
4	5350.00	6.57	63.42	69.99	74.00	-4.01	Peak	120	131	P
5	10600.00	14.04	28.63	42.67	54.00	-11.33	Average	100	59	P
6	10600.00	14.04	42.26	56.30	74.00	-17.70	Peak	100	59	P
7	15900.00	15.80	29.66	45.46	54.00	-8.54	Average	100	120	P
8	15900.00	15.80	43.56	59.36	74.00	-14.64	Peak	100	120	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 2, CH60		:

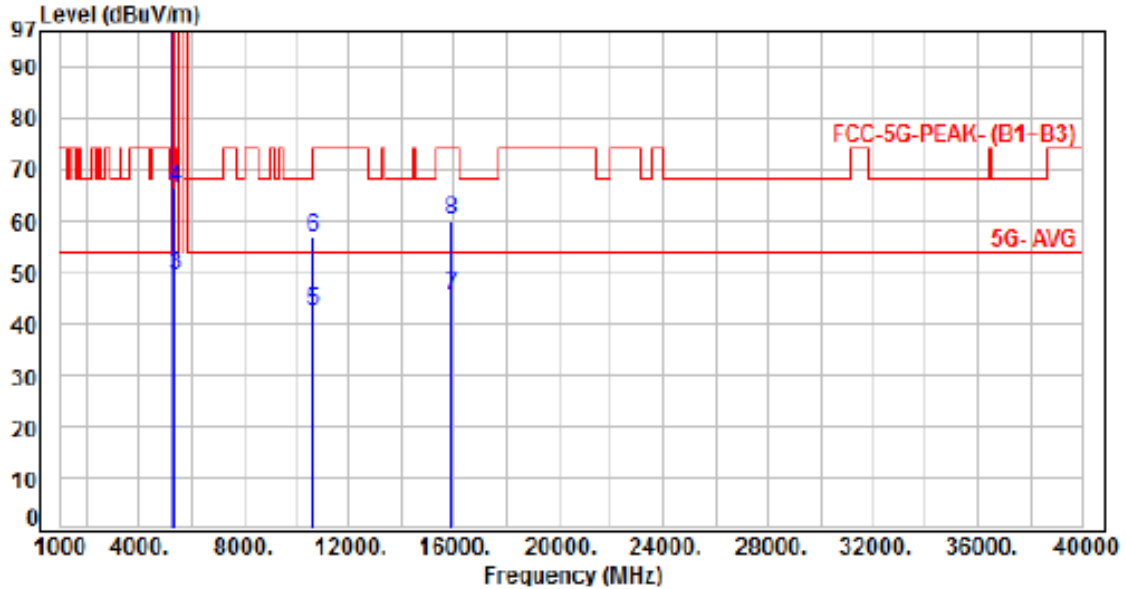


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	6.64	104.69	111.33	200.00	-88.67	Average	129	109	P
2	5300.00	6.64	117.65	124.29	200.00	-75.71	Peak	129	109	P
3	5350.00	6.57	42.90	49.47	54.00	-4.53	Average	129	109	P
4	5350.00	6.57	59.76	66.33	74.00	-7.67	Peak	129	109	P
5	10600.00	14.04	28.55	42.59	54.00	-11.41	Average	100	89	P
6	10600.00	14.04	42.76	56.80	74.00	-17.20	Peak	100	89	P
7	15900.00	15.80	29.68	45.48	54.00	-8.52	Average	100	155	P
8	15900.00	15.80	44.41	60.21	74.00	-13.79	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 2, CH64		:

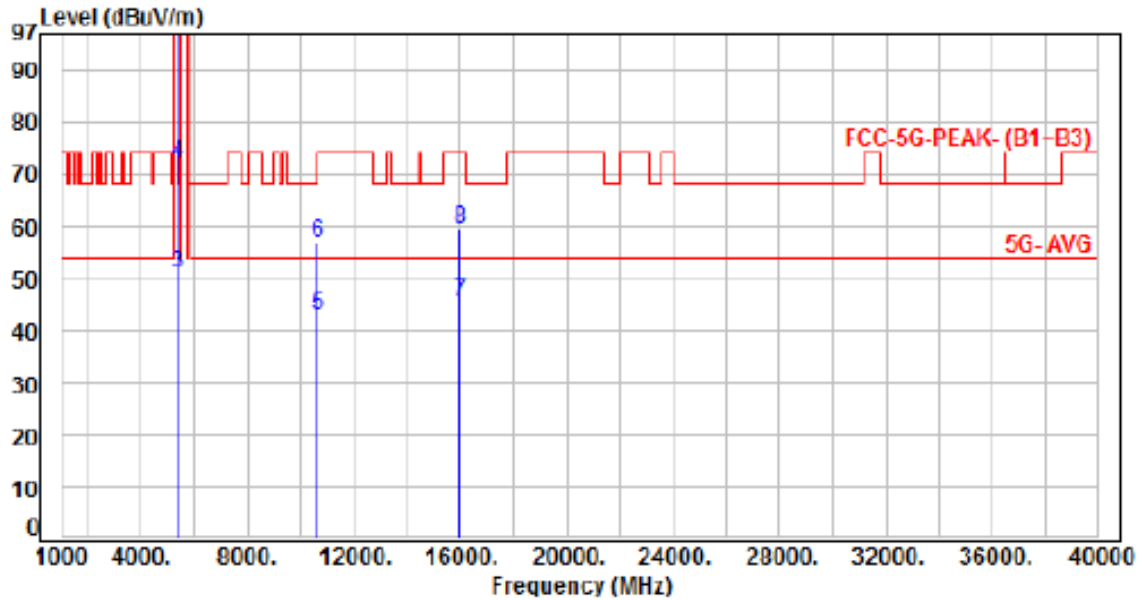


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	6.61	100.41	107.02	200.00	-92.98	Average	105	138	P
2	5320.00	6.61	114.04	120.65	200.00	-79.35	Peak	105	138	P
3	5350.00	6.57	44.23	50.80	54.00	-3.20	Average	105	138	P
4	5350.00	6.57	65.49	72.06	74.00	-1.94	Peak	105	138	P
5	10640.00	14.08	28.55	42.63	54.00	-11.37	Average	100	76	P
6	10640.00	14.08	42.85	56.93	74.00	-17.07	Peak	100	76	P
7	15960.00	15.66	29.78	45.44	54.00	-8.56	Average	100	184	P
8	15960.00	15.66	43.66	59.32	74.00	-14.68	Peak	100	184	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 2, CH64		:

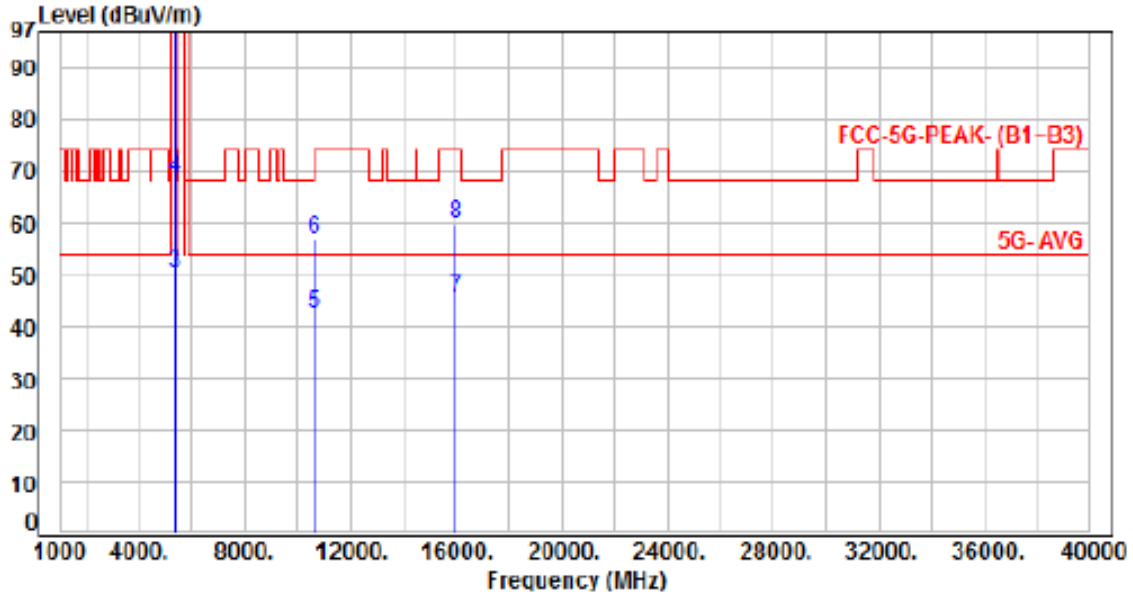

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	6.61	100.59	107.20	200.00	-92.80	Average	112	110	P
2	5320.00	6.61	114.43	121.04	200.00	-78.96	Peak	112	110	P
3	5350.00	6.57	43.49	50.06	54.00	-3.94	Average	112	110	P
4	5350.00	6.57	62.08	68.65	74.00	-5.35	Peak	112	110	P
5	10640.00	14.08	28.50	42.58	54.00	-11.42	Average	100	47	P
6	10640.00	14.08	42.87	56.95	74.00	-17.05	Peak	100	47	P
7	15960.00	15.66	29.65	45.31	54.00	-8.69	Average	100	118	P
8	15960.00	15.66	43.98	59.64	74.00	-14.36	Peak	100	118	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 2, CH54		

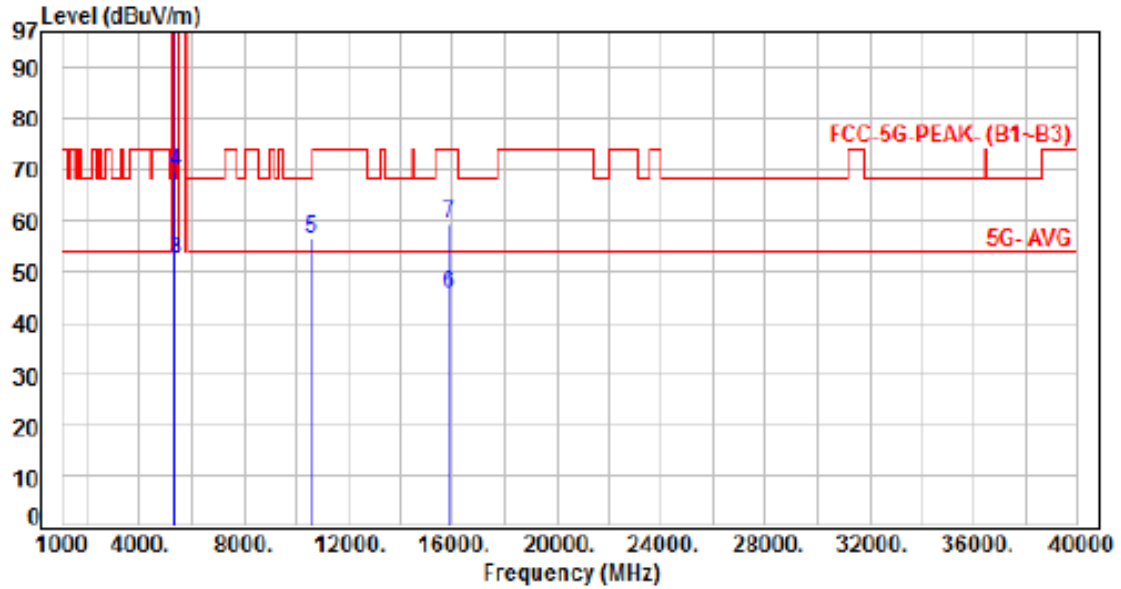


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	6.54	99.85	106.40	200.00	-93.60	Average	100	132	P
2	5270.00	6.54	109.97	116.51	200.00	-83.49	Peak	100	132	P
3	5350.00	6.57	45.80	52.37	54.00	-1.63	Average	100	132	P
4	5350.00	6.57	63.18	69.75	74.00	-4.25	Peak	100	132	P
5	10540.00	13.96	42.33	56.29	68.20	-11.91	Peak	100	73	P
6	15810.00	15.74	29.94	45.68	54.00	-8.32	Average	100	136	P
7	15810.00	15.74	43.75	59.49	74.00	-14.51	Peak	100	136	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 2, CH54		:

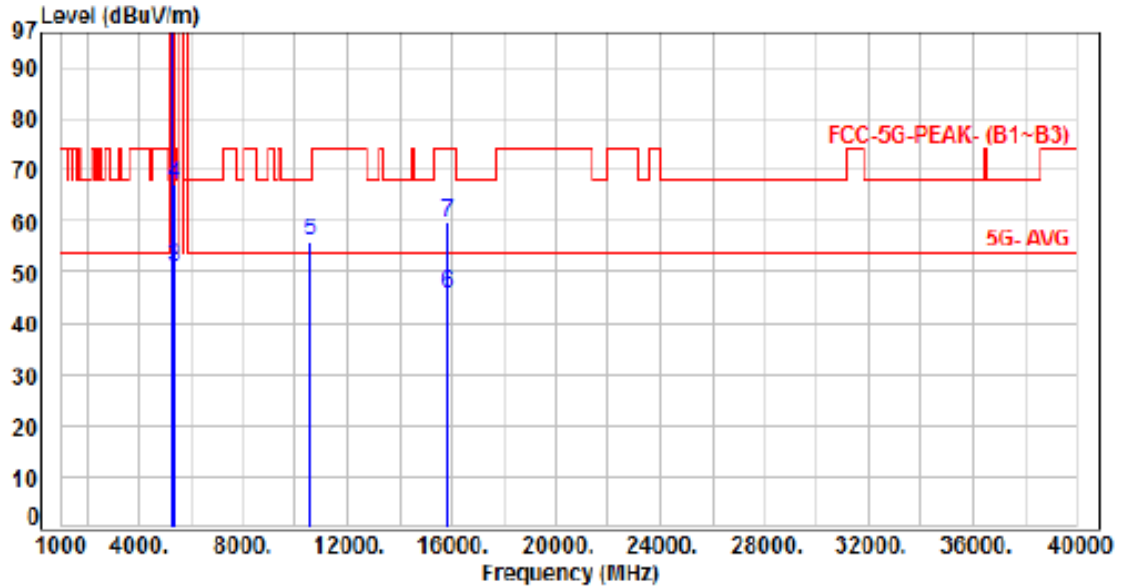


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	6.54	101.92	108.46	200.00	-91.54	Average	100	78	P
2	5270.00	6.54	113.79	120.33	200.00	-79.67	Peak	100	78	P
3	5350.00	6.57	44.38	50.95	54.00	-3.05	Average	100	78	P
4	5350.00	6.57	60.69	67.26	74.00	-6.74	Peak	100	78	P
5	10540.00	13.96	42.06	56.02	68.20	-12.18	Peak	100	81	P
6	15810.00	15.74	29.94	45.68	54.00	-8.32	Average	100	161	P
7	15810.00	15.74	43.90	59.64	74.00	-14.36	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 2, CH62		:

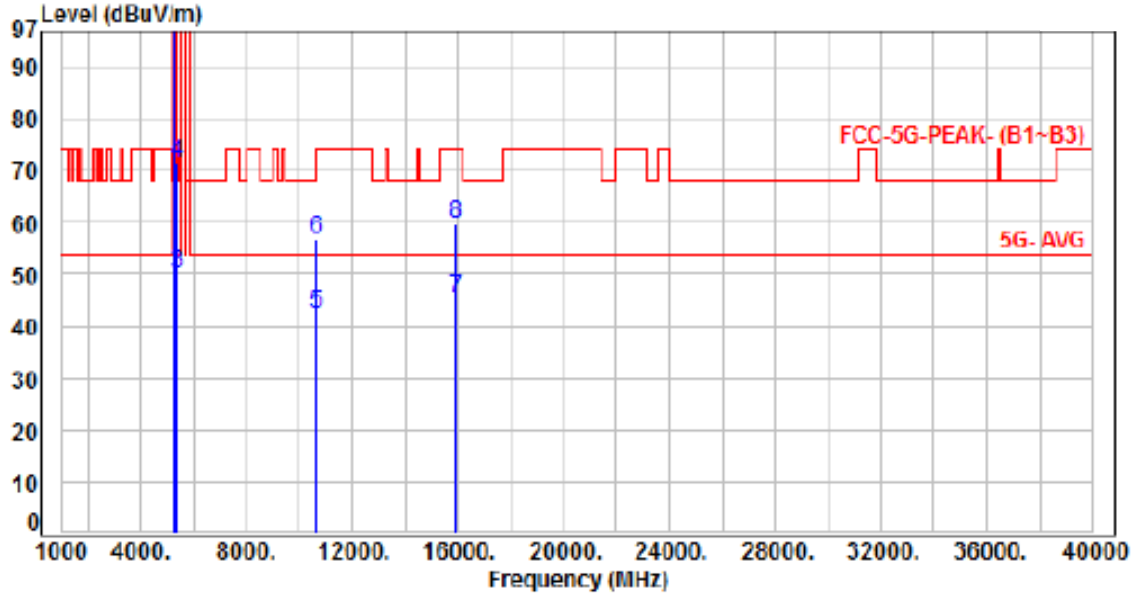


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	6.62	95.23	101.85	200.00	-98.15	Average	100	146	P
2	5310.00	6.62	108.38	115.00	200.00	-85.00	Peak	100	146	P
3	5350.00	6.57	43.42	49.99	54.00	-4.01	Average	100	146	P
4	5350.00	6.57	65.05	71.62	74.00	-2.38	Peak	100	146	P
5	10620.00	14.06	28.50	42.56	54.00	-11.44	Average	100	69	P
6	10620.00	14.06	42.81	56.87	74.00	-17.13	Peak	100	69	P
7	15930.00	15.73	29.72	45.45	54.00	-8.55	Average	100	179	P
8	15930.00	15.73	43.85	59.58	74.00	-14.42	Peak	100	179	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 2, CH62		:

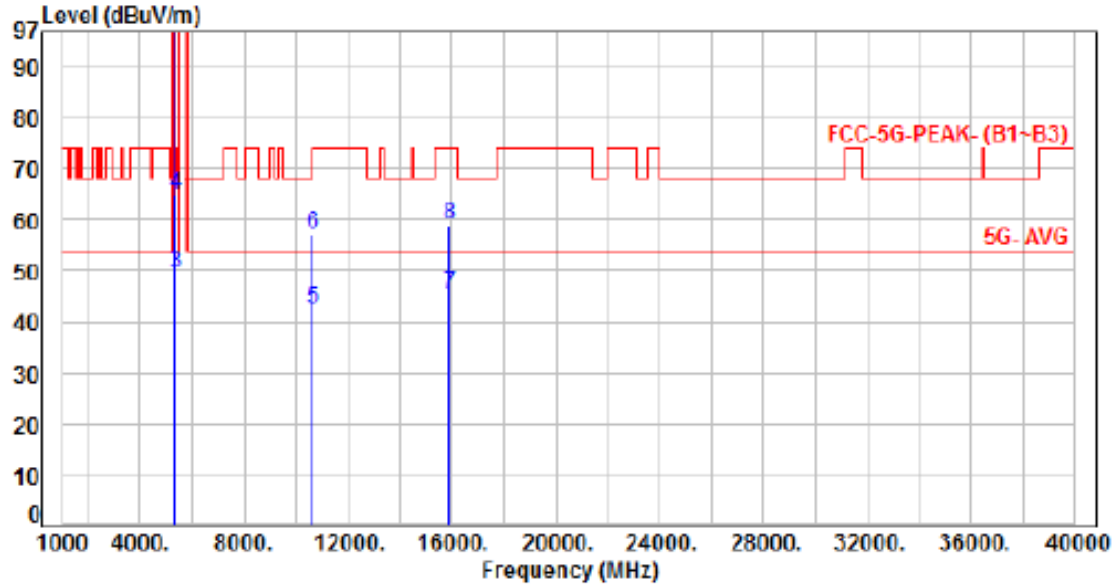

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	6.62	98.68	105.30	200.00	-94.70	Average	100	77	P
2	5310.00	6.62	111.40	118.02	200.00	-81.98	Peak	100	77	P
3	5350.00	6.57	43.00	49.57	54.00	-4.43	Average	100	77	P
4	5350.00	6.57	58.47	65.04	74.00	-8.96	Peak	100	77	P
5	10620.00	14.06	28.52	42.58	54.00	-11.42	Average	100	81	P
6	10620.00	14.06	43.02	57.08	74.00	-16.92	Peak	100	81	P
7	15930.00	15.73	29.71	45.44	54.00	-8.56	Average	100	158	P
8	15930.00	15.73	43.45	59.18	74.00	-14.82	Peak	100	158	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 2, CH58		

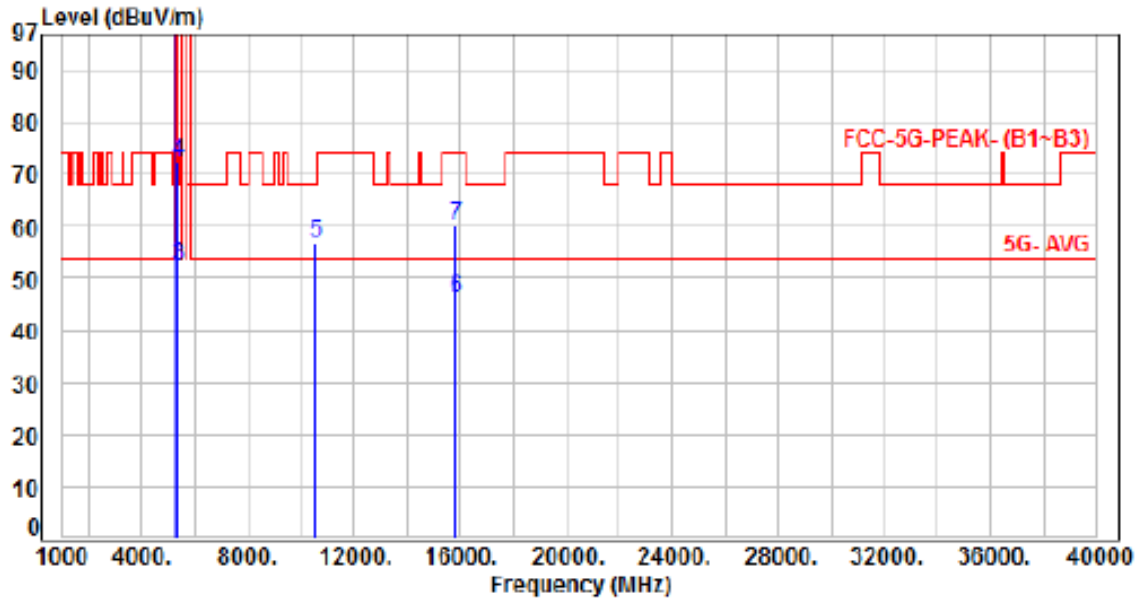


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	6.60	94.59	101.19	200.00	-98.81	Average	116	140	P
2	5290.00	6.60	107.37	113.97	200.00	-86.03	Peak	116	140	P
3	5350.00	6.57	45.98	52.55	54.00	-1.45	Average	116	140	P
4	5350.00	6.57	65.83	72.40	74.00	-1.60	Peak	116	140	P
5	10580.00	14.00	42.62	56.62	68.20	-11.58	Peak	100	81	P
6	15870.00	15.79	30.22	46.01	54.00	-7.99	Average	100	192	P
7	15870.00	15.79	44.21	60.00	74.00	-14.00	Peak	100	192	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 2, CH58		:

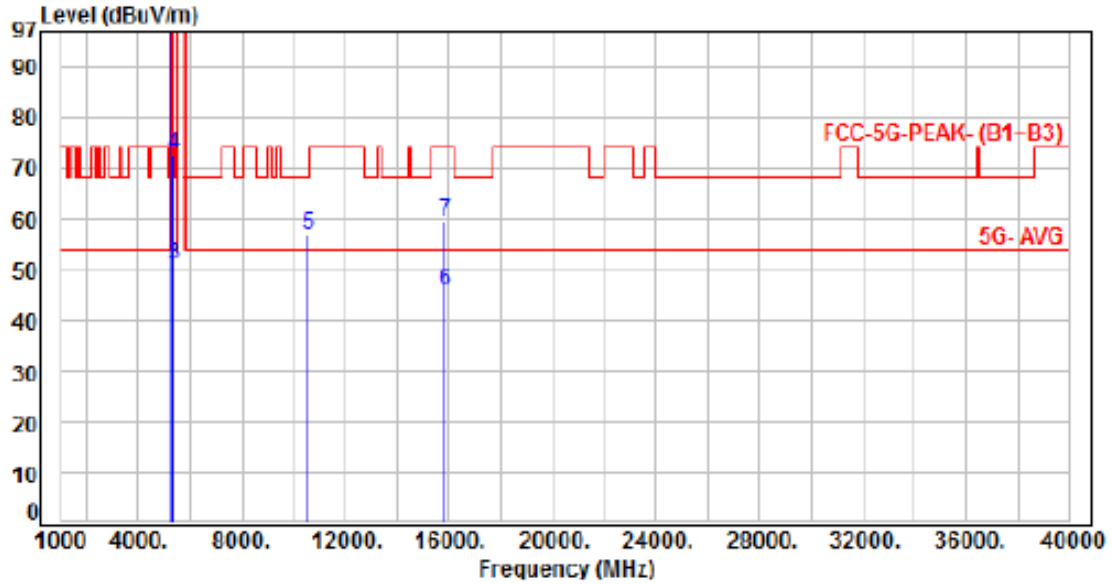


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	6.60	98.50	105.10	200.00	-94.90	Average	100	80	P
2	5290.00	6.60	110.13	116.73	200.00	-83.27	Peak	100	80	P
3	5350.00	6.57	44.39	50.96	54.00	-3.04	Average	100	80	P
4	5350.00	6.57	65.97	72.54	74.00	-1.46	Peak	100	80	P
5	10580.00	14.00	42.93	56.93	68.20	-11.27	Peak	100	88	P
6	15870.00	15.79	30.07	45.86	54.00	-8.14	Average	100	173	P
7	15870.00	15.79	43.72	59.51	74.00	-14.49	Peak	100	173	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 3, CH100		

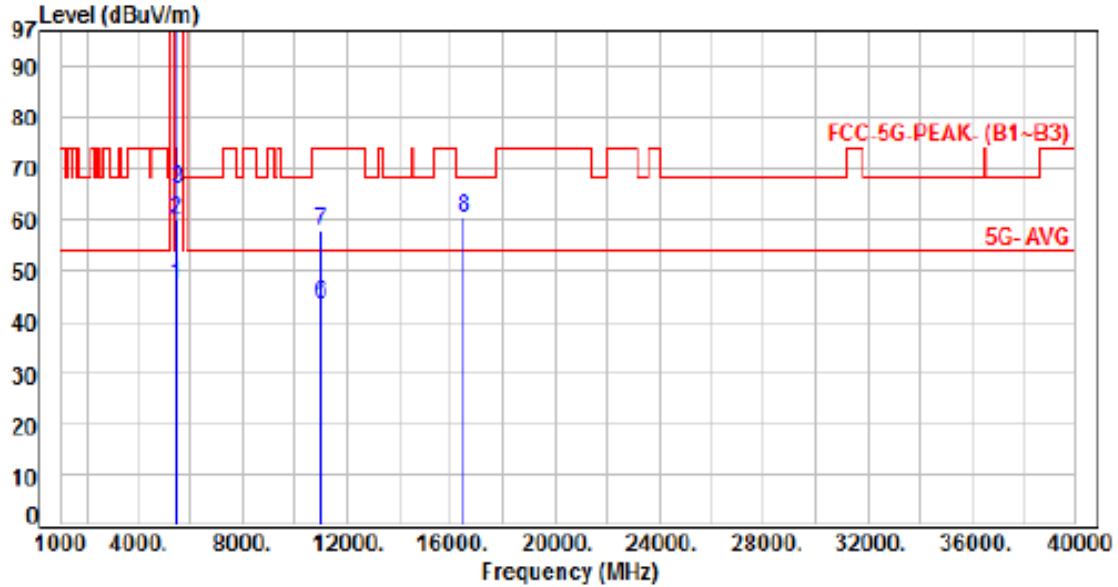


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	40.46	47.15	54.00	-6.85	Average	107	142	P
2	5460.00	6.69	53.41	60.10	74.00	-13.90	Peak	107	142	P
3	5470.00	6.72	59.40	66.12	68.20	-2.08	Peak	107	142	P
4	5500.00	6.80	97.13	103.93	200.00	-96.07	Average	107	142	P
5	5500.00	6.80	110.89	117.69	200.00	-82.31	Peak	107	142	P
6	11000.00	14.68	28.79	43.47	54.00	-10.53	Average	100	64	P
7	11000.00	14.68	43.28	57.96	74.00	-16.04	Peak	100	64	P
8	16500.00	17.03	43.47	60.50	68.20	-7.70	Peak	100	143	P

Note: Level-Reading+Factor
Margin-Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 3, CH100		:

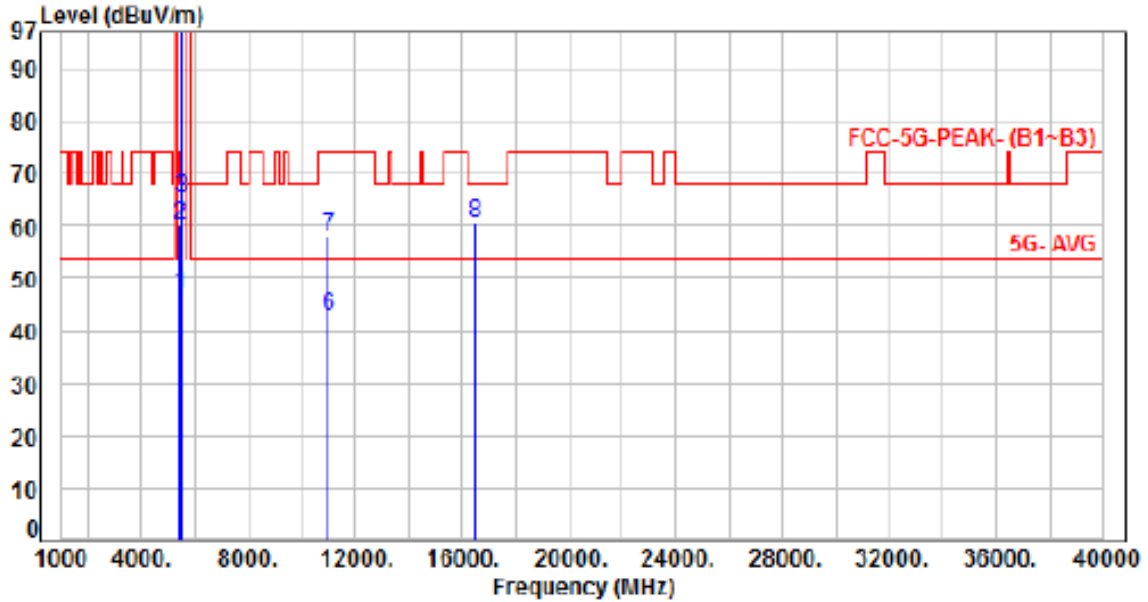


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	40.27	46.96	54.00	-7.04	Average	294	121	P
2	5460.00	6.69	53.42	60.11	74.00	-13.89	Peak	294	121	P
3	5470.00	6.72	58.68	65.40	68.20	-2.80	Peak	294	121	P
4	5500.00	6.80	99.75	106.55	200.00	-93.45	Average	294	121	P
5	5500.00	6.80	112.26	119.06	200.00	-80.94	Peak	294	121	P
6	11000.00	14.68	28.19	42.87	54.00	-11.13	Average	100	77	P
7	11000.00	14.68	43.17	57.85	74.00	-16.15	Peak	100	77	P
8	16500.00	17.03	43.35	60.38	68.20	-7.82	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 3, CH120		

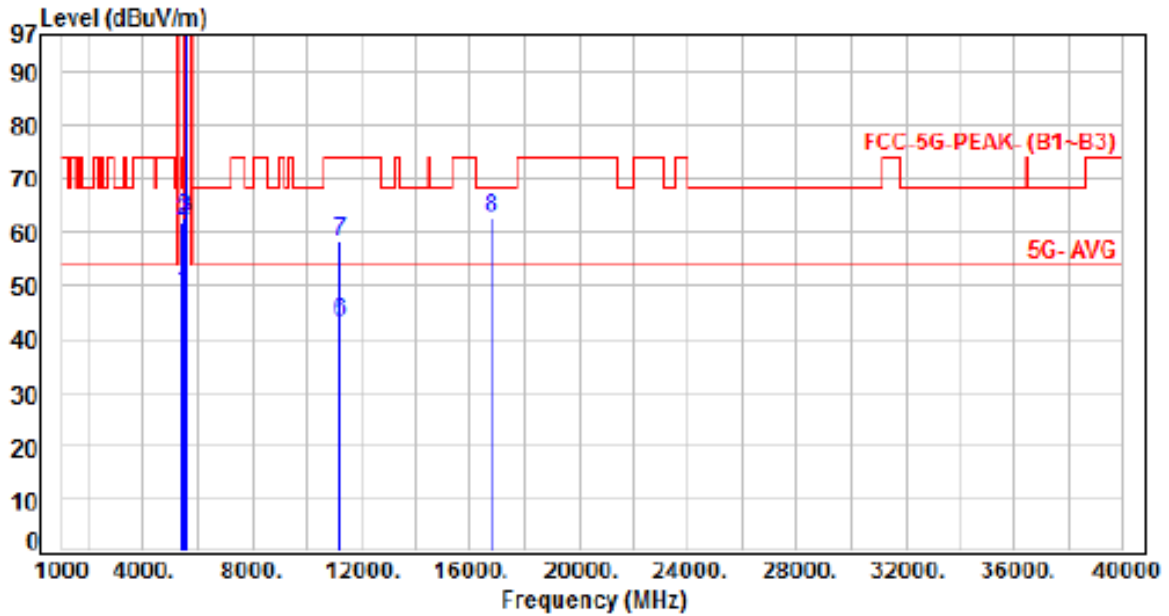


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.07	48.76	54.00	-5.24	Average	124	140	P
2	5460.00	6.69	55.16	61.85	74.00	-12.15	Peak	124	140	P
3	5470.00	6.72	56.12	62.84	68.20	-5.36	Peak	124	140	P
4	5600.00	6.78	103.62	110.40	200.00	-89.60	Average	124	140	P
5	5600.00	6.78	117.75	124.53	200.00	-75.47	Peak	124	140	P
6	11200.00	14.71	28.44	43.15	54.00	-10.85	Average	100	64	P
7	11200.00	14.71	43.61	58.32	74.00	-15.68	Peak	100	64	P
8	16800.00	19.05	43.70	62.75	68.20	-5.45	Peak	100	147	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 3, CH120		:

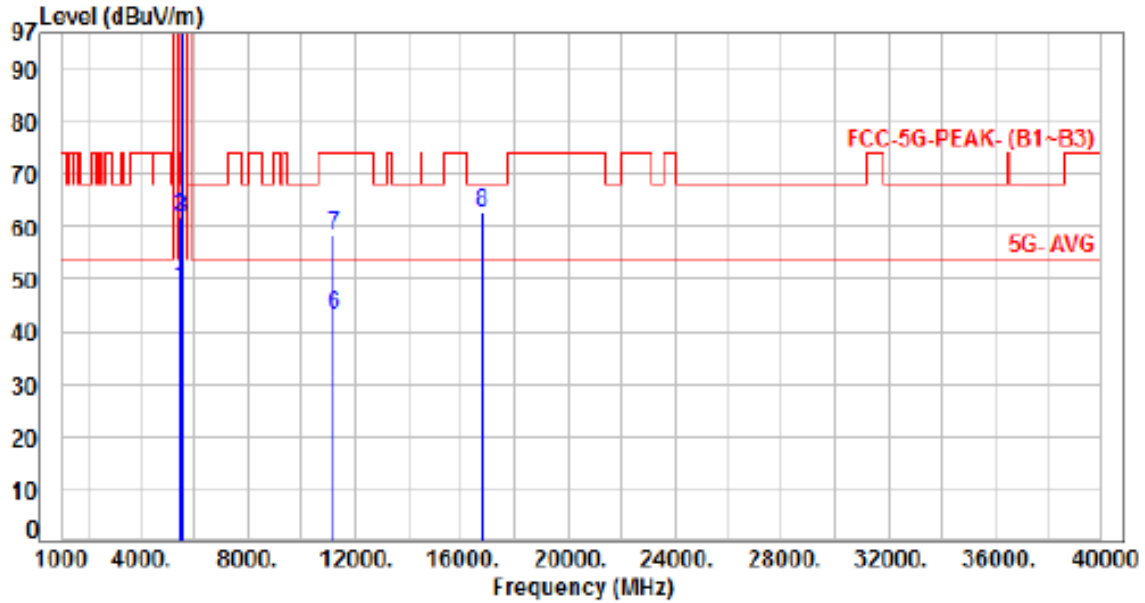


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.55	48.24	54.00	-5.76	Average	314	90	P
2	5460.00	6.69	55.45	62.14	74.00	-11.86	Peak	314	90	P
3	5470.00	6.72	55.00	61.72	68.20	-6.48	Peak	314	90	P
4	5600.00	6.78	104.56	111.34	200.00	-88.66	Average	314	90	P
5	5600.00	6.78	118.20	124.98	200.00	-75.02	Peak	314	90	P
6	11200.00	14.71	28.29	43.00	54.00	-11.00	Average	100	78	P
7	11200.00	14.71	43.55	58.26	74.00	-15.74	Peak	100	78	P
8	16800.00	19.05	43.64	62.69	68.20	-5.51	Peak	100	101	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 3, CH140		:

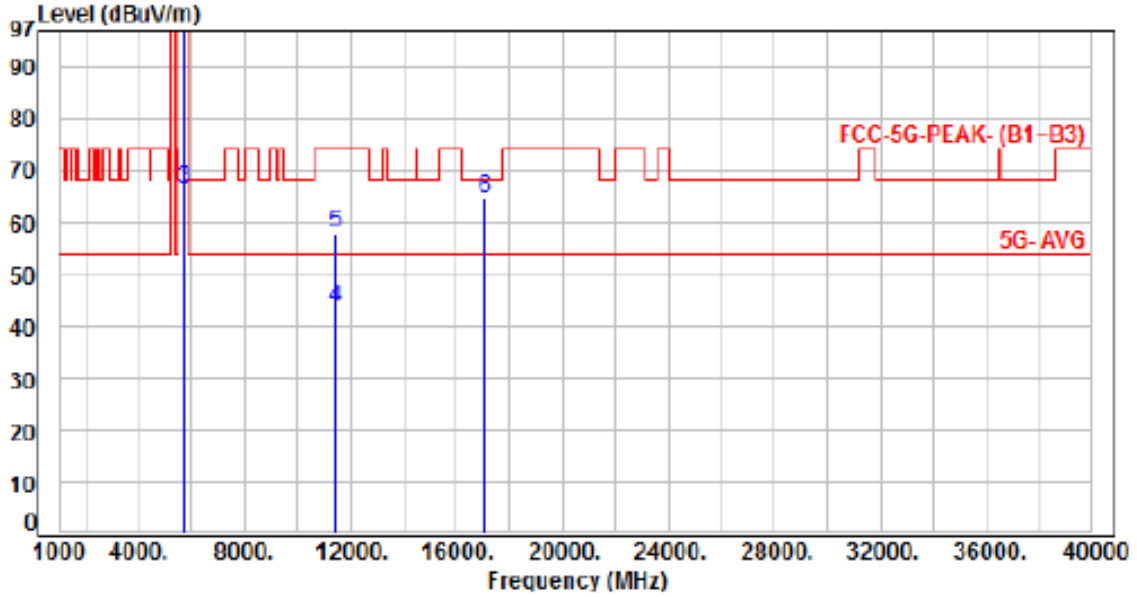


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	6.86	97.83	104.69	200.00	-95.31	Average	100	142	P
2	5700.00	6.86	111.50	118.36	200.00	-81.64	Peak	100	142	P
3	5725.00	6.83	59.44	66.27	68.20	-1.93	Peak	100	142	P
4	11400.00	14.94	28.72	43.66	54.00	-10.34	Average	100	65	P
5	11400.00	14.94	43.09	58.03	74.00	-15.97	Peak	100	65	P
6	17100.00	20.81	43.79	64.60	68.20	-3.60	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 3, CH140		:

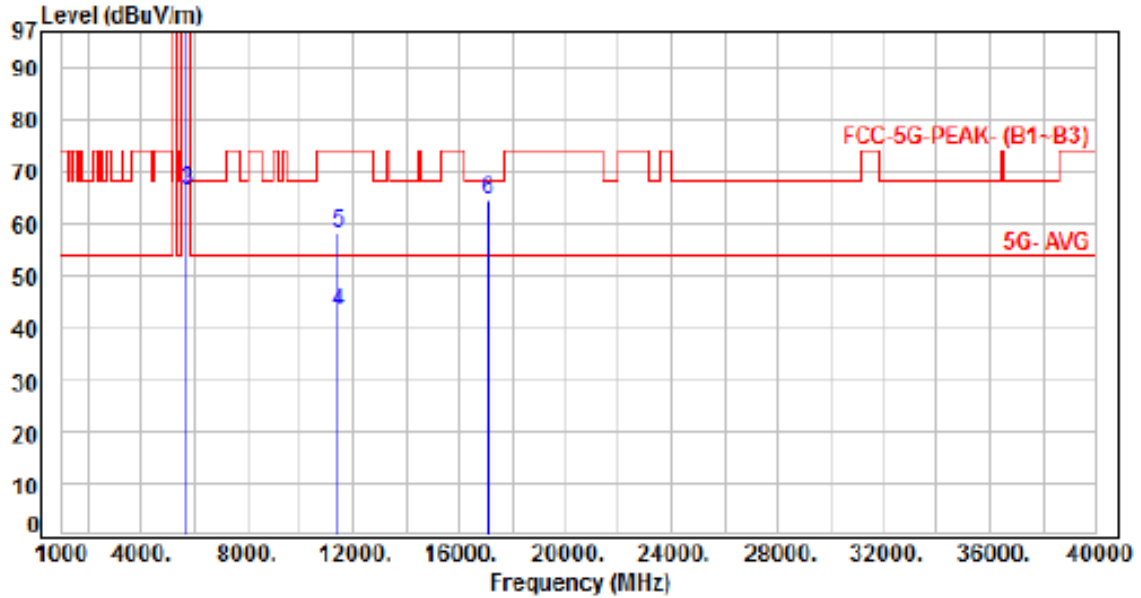

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	6.86	98.50	105.36	200.00	-94.64	Average	140	94	P
2	5700.00	6.86	111.58	118.44	200.00	-81.56	Peak	140	94	P
3	5725.00	6.83	59.42	66.25	68.20	-1.95	Peak	140	94	P
4	11400.00	14.94	28.31	43.25	54.00	-10.75	Average	100	82	P
5	11400.00	14.94	43.36	58.30	74.00	-15.70	Peak	100	82	P
6	17100.00	20.81	43.68	64.49	68.20	-3.71	Peak	100	105	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 3, CH102		

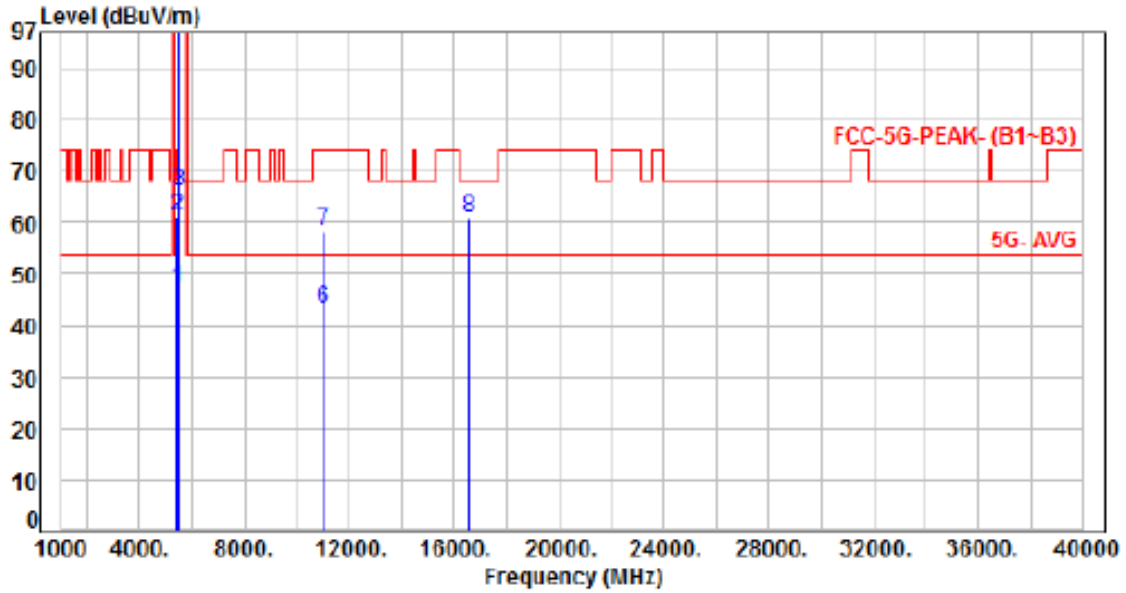


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	40.58	47.27	54.00	-6.73	Average	110	144	P
2	5460.00	6.69	54.36	61.05	74.00	-12.95	Peak	110	144	P
3	5470.00	6.72	59.37	66.09	68.20	-2.11	Peak	110	144	P
4	5510.00	6.79	92.51	99.30	200.00	-100.70	Average	110	144	P
5	5510.00	6.79	105.97	112.76	200.00	-87.24	Peak	110	144	P
6	11020.00	14.67	28.38	43.05	54.00	-10.95	Average	100	61	P
7	11020.00	14.67	43.61	58.28	74.00	-15.72	Peak	100	61	P
8	16530.00	17.31	43.45	60.77	68.20	-7.43	Peak	100	139	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 3, CH102		:

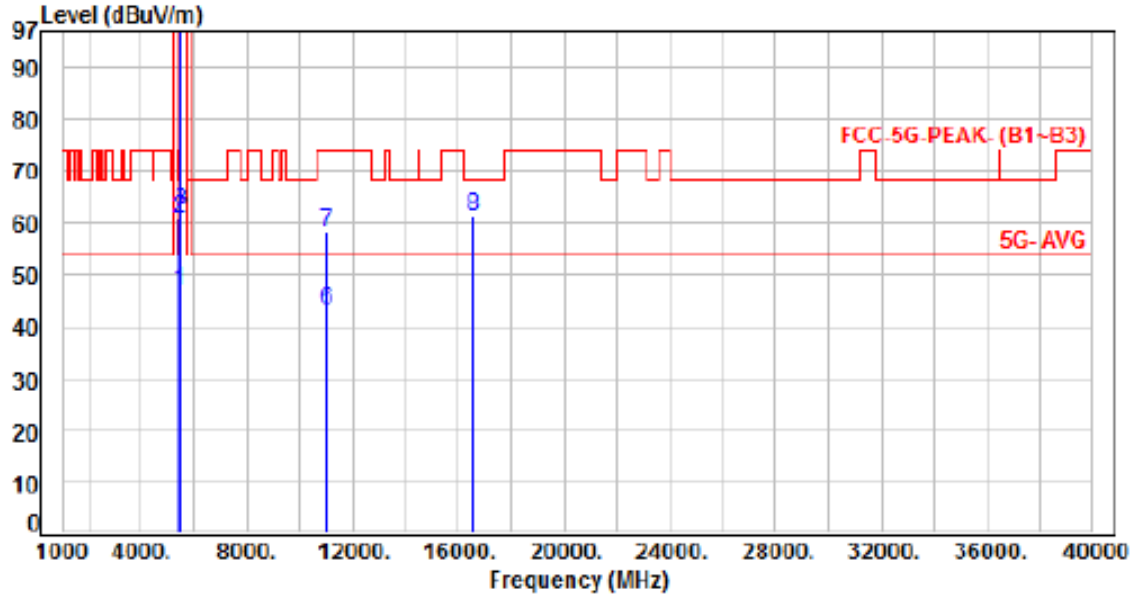


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	40.28	46.97	54.00	-7.03	Average	109	90	P
2	5460.00	6.69	54.10	60.79	74.00	-13.21	Peak	109	90	P
3	5470.00	6.72	55.60	62.32	68.20	-5.88	Peak	109	90	P
4	5510.00	6.79	94.60	101.39	200.00	-98.61	Average	109	90	P
5	5510.00	6.79	106.86	113.65	200.00	-86.35	Peak	109	90	P
6	11020.00	14.67	28.66	43.33	54.00	-10.67	Average	100	80	P
7	11020.00	14.67	43.58	58.25	74.00	-15.75	Peak	100	80	P
8	16530.00	17.31	44.07	61.38	68.20	-6.82	Peak	100	103	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 3, CH118		:

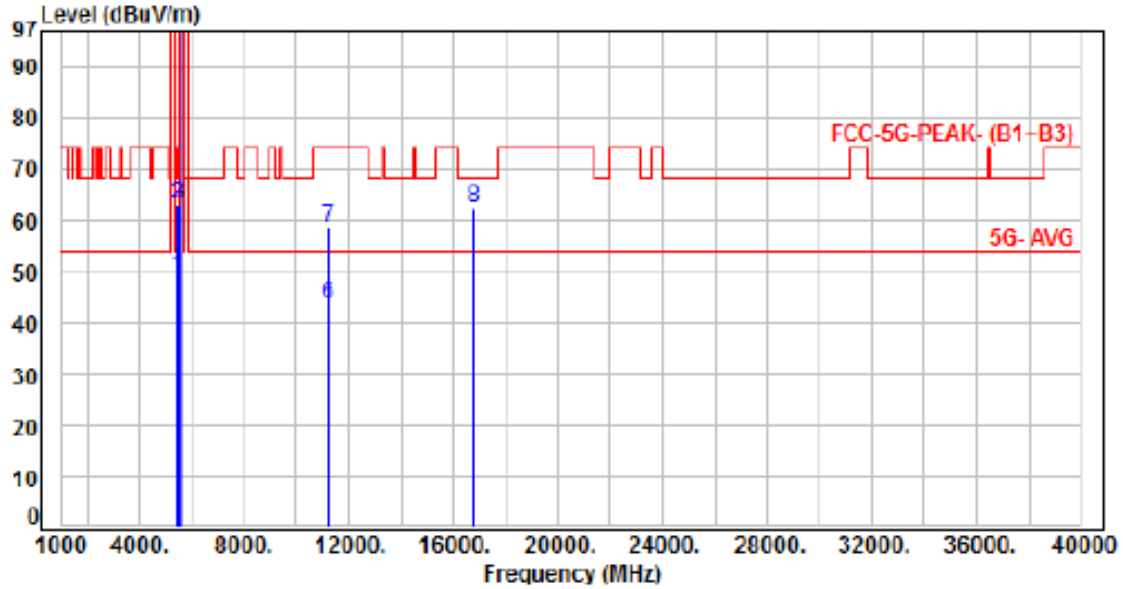


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.32	49.01	54.00	-4.99	Average	123	142	P
2	5460.00	6.69	56.22	62.91	74.00	-11.09	Peak	123	142	P
3	5470.00	6.72	56.20	62.92	68.20	-5.28	Peak	123	142	P
4	5590.00	6.77	99.87	106.64	200.00	-93.36	Average	123	142	P
5	5590.00	6.77	112.91	119.68	200.00	-80.32	Peak	123	142	P
6	11180.00	14.70	28.87	43.57	54.00	-10.43	Average	100	62	P
7	11180.00	14.70	43.83	58.53	74.00	-15.47	Peak	100	62	P
8	16770.00	18.88	43.47	62.35	68.20	-5.85	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 3, CH118		:

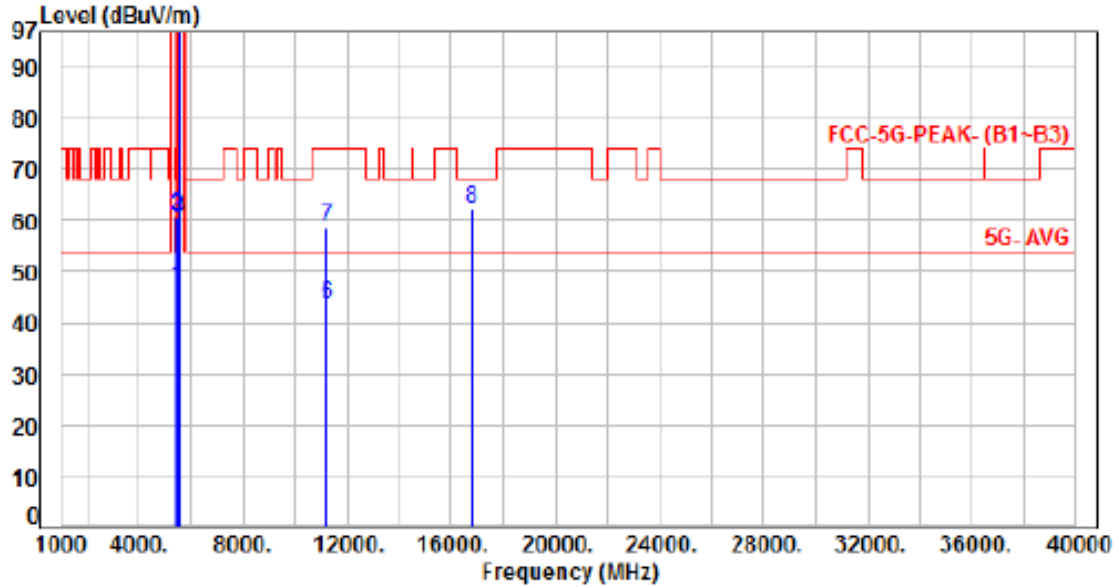


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	40.04	46.73	54.00	-7.27	Average	119	116	P
2	5460.00	6.69	54.16	60.85	74.00	-13.15	Peak	119	116	P
3	5470.00	6.72	53.80	60.52	68.20	-7.68	Peak	119	116	P
4	5590.00	6.77	101.27	108.04	200.00	-91.96	Average	119	116	P
5	5590.00	6.77	113.60	120.37	200.00	-79.63	Peak	119	116	P
6	11180.00	14.70	28.71	43.41	54.00	-10.59	Average	100	75	P
7	11180.00	14.70	43.93	58.63	74.00	-15.37	Peak	100	75	P
8	16770.00	18.88	43.45	62.33	68.20	-5.87	Peak	100	101	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 3, CH134		:

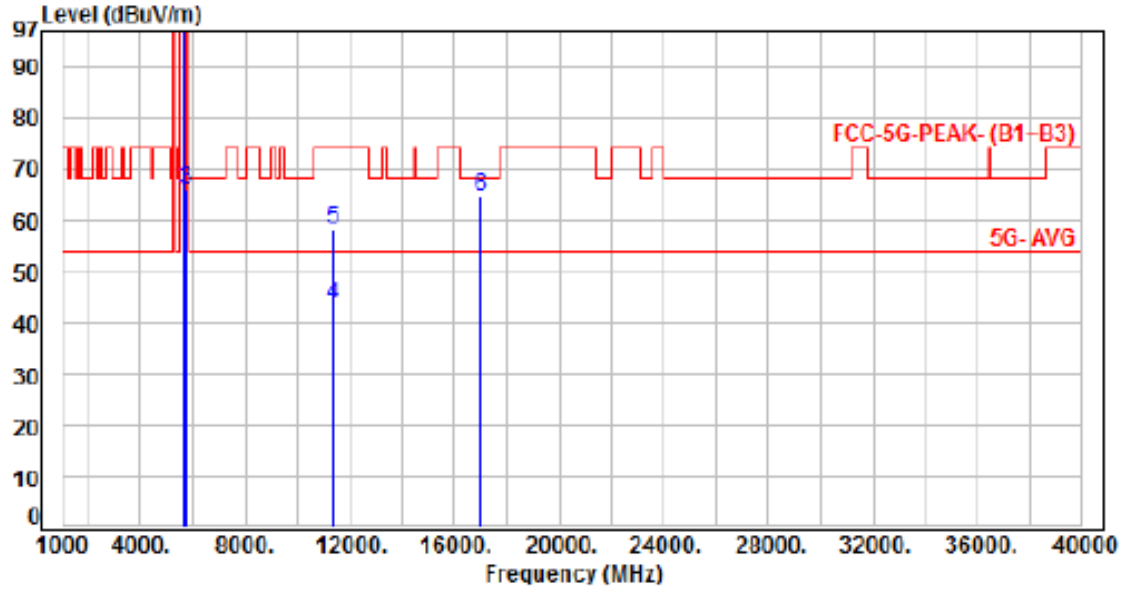

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	6.71	94.05	100.76	200.00	-99.24	Average	122	142	P
2	5670.00	6.71	108.02	114.73	200.00	-85.27	Peak	122	142	P
3	5725.00	6.83	59.10	65.93	68.20	-2.27	Peak	122	142	P
4	11340.00	14.84	28.66	43.50	54.00	-10.50	Average	100	63	P
5	11340.00	14.84	43.59	58.43	74.00	-15.57	Peak	100	63	P
6	17010.00	20.59	44.11	64.70	68.20	-3.50	Peak	100	140	P

Note: Level-Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 3, CH134		:

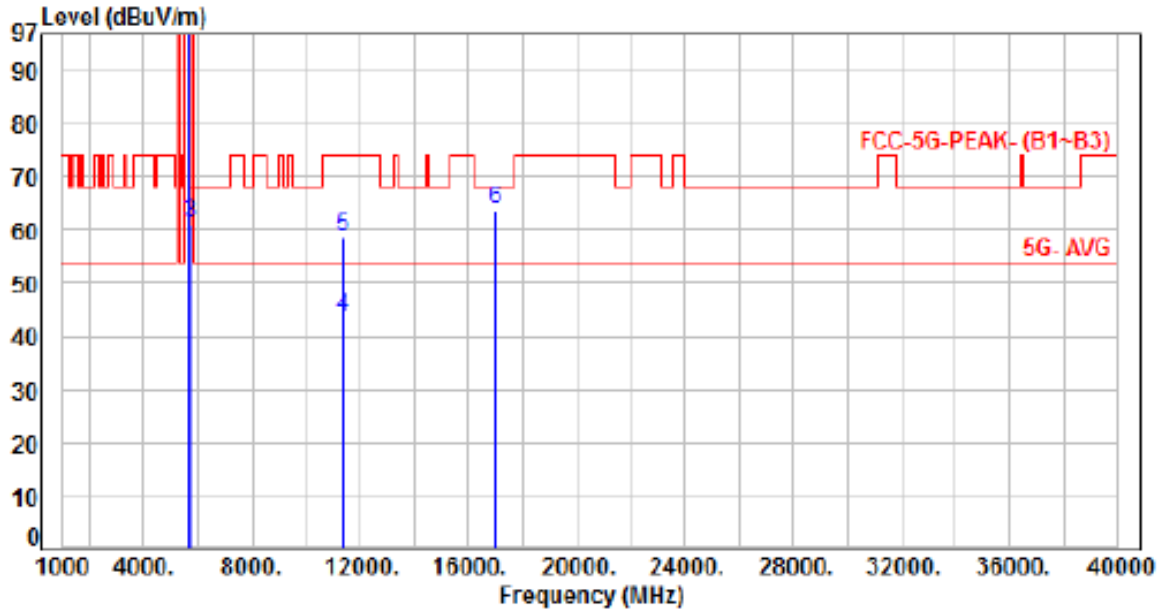


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	6.71	96.04	102.75	200.00	-97.25	Average	139	116	P
2	5670.00	6.71	109.41	116.12	200.00	-83.88	Peak	139	116	P
3	5725.00	6.83	54.46	61.29	68.20	-6.91	Peak	139	116	P
4	11340.00	14.84	28.74	43.58	54.00	-10.42	Average	100	77	P
5	11340.00	14.84	43.68	58.52	74.00	-15.48	Peak	100	77	P
6	17010.00	20.59	43.30	63.89	68.20	-4.31	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 3, CH106		:

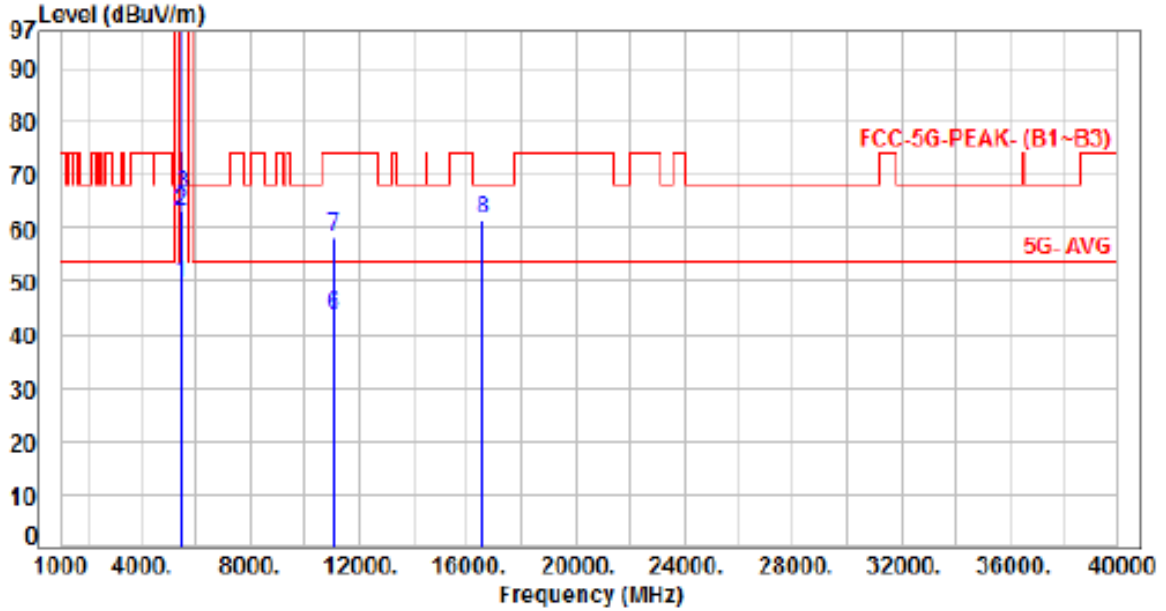


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.80	49.49	54.00	-4.51	Average	107	142	P
2	5460.00	6.69	56.35	63.04	74.00	-10.96	Peak	107	142	P
3	5470.00	6.72	59.65	66.37	68.20	-1.83	Peak	107	142	P
4	5530.00	6.76	91.45	98.21	200.00	-101.79	Average	107	142	P
5	5530.00	6.76	104.48	111.24	200.00	-88.76	Peak	107	142	P
6	11060.00	14.66	28.93	43.59	54.00	-10.41	Average	100	61	P
7	11060.00	14.66	43.69	58.35	74.00	-15.65	Peak	100	61	P
8	16590.00	17.84	43.69	61.53	68.20	-6.67	Peak	100	146	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 3, CH106		:

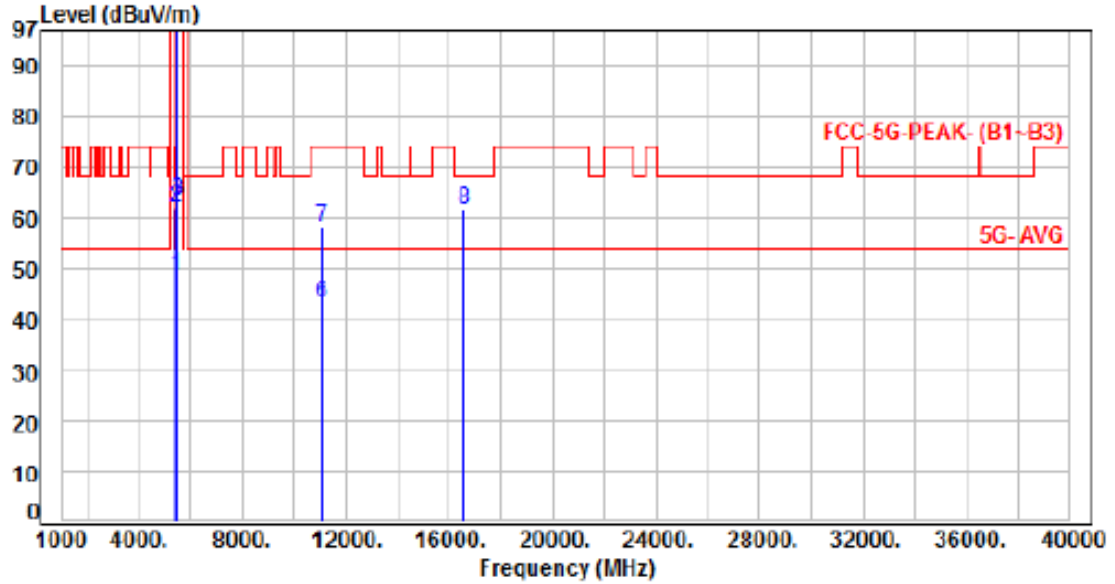


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.01	48.70	54.00	-5.30	Average	321	100	P
2	5460.00	6.69	55.21	61.90	74.00	-12.10	Peak	321	100	P
3	5470.00	6.72	56.66	63.38	68.20	-4.82	Peak	321	100	P
4	5530.00	6.76	90.98	97.74	200.00	-102.26	Average	321	100	P
5	5530.00	6.76	106.21	112.97	200.00	-87.03	Peak	321	100	P
6	11060.00	14.66	28.63	43.29	54.00	-10.71	Average	100	77	P
7	11060.00	14.66	43.67	58.33	74.00	-15.67	Peak	100	77	P
8	16590.00	17.84	43.85	61.69	68.20	-6.51	Peak	100	105	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 3, CH122		:

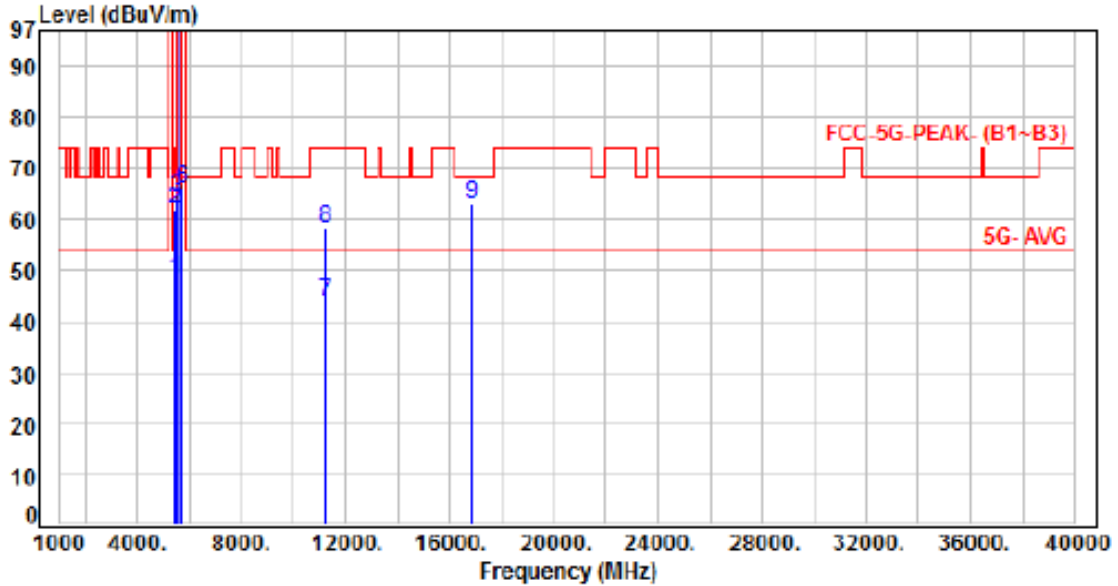


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.51	48.20	54.00	-5.80	Average	128	142	P
2	5460.00	6.69	55.44	62.13	74.00	-11.87	Peak	128	142	P
3	5470.00	6.72	57.62	64.34	68.20	-3.86	Peak	128	142	P
4	5610.00	6.75	94.11	100.86	200.00	-99.14	Average	128	142	P
5	5610.00	6.75	108.27	115.02	200.00	-84.98	Peak	128	142	P
6	5725.00	6.83	59.02	65.85	68.20	-2.35	Peak	128	142	P
7	11220.00	14.73	29.07	43.80	54.00	-10.20	Average	100	64	P
8	11220.00	14.73	43.44	58.17	74.00	-15.83	Peak	100	64	P
9	16830.00	19.35	43.70	63.05	68.20	-5.15	Peak	100	139	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 3, CH122		:

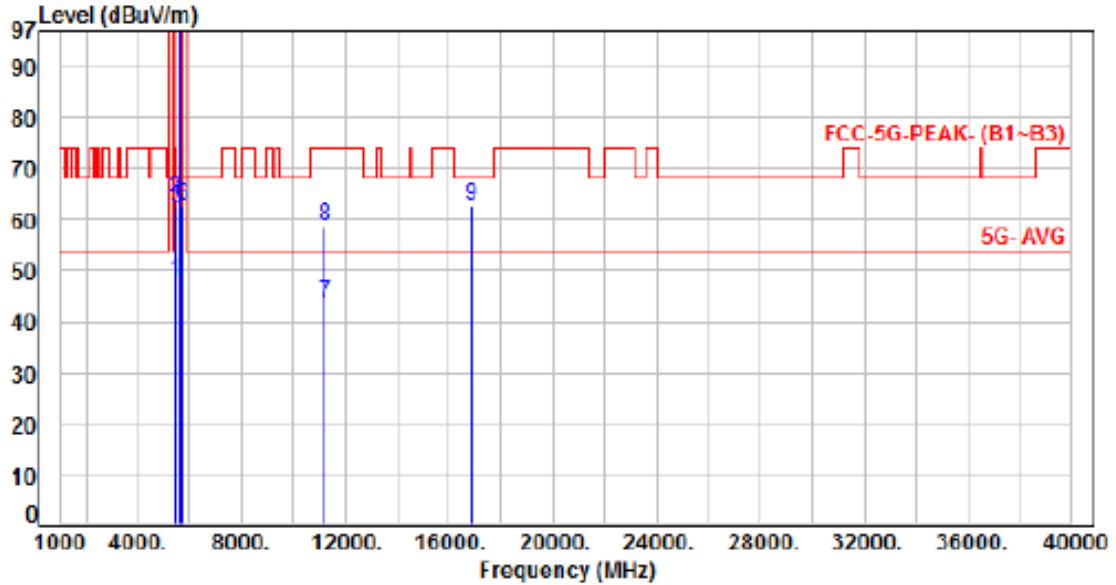

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.22	47.91	54.00	-6.09	Average	300	72	P
2	5460.00	6.69	57.52	64.21	74.00	-9.79	Peak	300	72	P
3	5470.00	6.72	55.47	62.19	68.20	-6.01	Peak	300	72	P
4	5610.00	6.75	96.67	103.42	200.00	-96.58	Average	300	72	P
5	5610.00	6.75	109.26	116.01	200.00	-83.99	Peak	300	72	P
6	5725.00	6.83	55.95	62.78	68.20	-5.42	Peak	300	72	P
7	11220.00	14.73	28.95	43.68	54.00	-10.32	Average	100	78	P
8	11220.00	14.73	43.84	58.57	74.00	-15.43	Peak	100	78	P
9	16830.00	19.35	43.51	62.86	68.20	-5.34	Peak	100	101	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 3, CH114		:

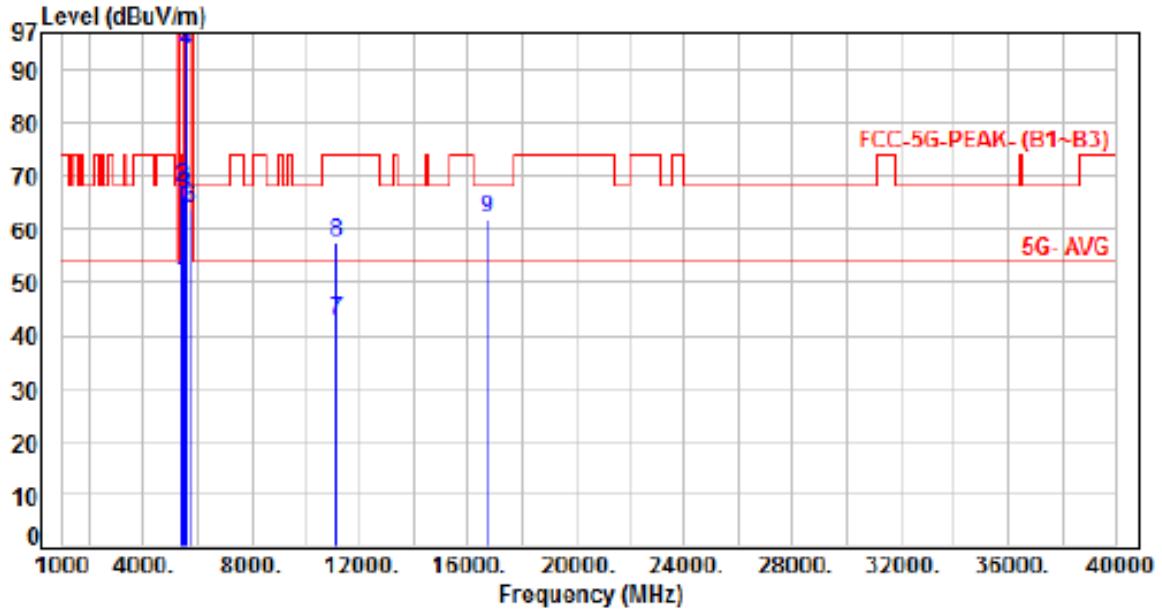


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.10	49.79	54.00	-4.21	Average	100	143	P
2	5460.00	6.69	61.24	67.93	74.00	-6.07	Peak	100	143	P
3	5470.00	6.72	59.82	66.54	68.20	-1.66	Peak	100	143	P
4	5570.00	6.75	86.91	93.66	200.00	-106.34	Average	100	143	P
5	5570.00	6.75	102.36	109.11	200.00	-90.89	Peak	100	143	P
6	5725.00	6.83	57.09	63.92	68.20	-4.28	Peak	100	143	P
7	11140.00	14.67	28.16	42.83	54.00	-11.17	Average	100	57	P
8	11140.00	14.67	42.68	57.35	74.00	-16.65	Peak	100	57	P
9	16710.00	18.50	43.59	62.09	68.20	-6.11	Peak	100	179	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 3, CH114		:

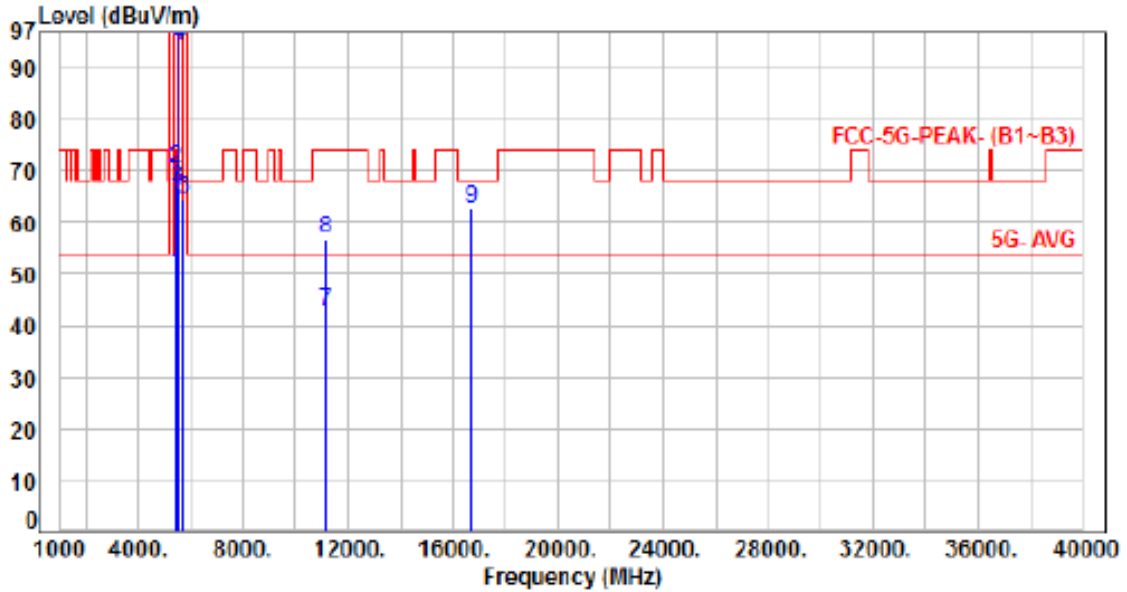


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.21	49.90	54.00	-4.10	Average	292	80	P
2	5460.00	6.69	63.69	70.38	74.00	-3.62	Peak	292	80	P
3	5470.00	6.72	59.87	66.59	68.20	-1.61	Peak	292	80	P
4	5570.00	6.75	87.77	94.52	200.00	-105.48	Average	292	80	P
5	5570.00	6.75	103.23	109.98	200.00	-90.02	Peak	292	80	P
6	5725.00	6.83	57.74	64.57	68.20	-3.63	Peak	292	80	P
7	11140.00	14.67	28.21	42.88	54.00	-11.12	Average	100	65	P
8	11140.00	14.67	42.26	56.93	74.00	-17.07	Peak	100	65	P
9	16710.00	18.50	44.33	62.83	68.20	-5.37	Peak	100	182	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 4, CH149		:

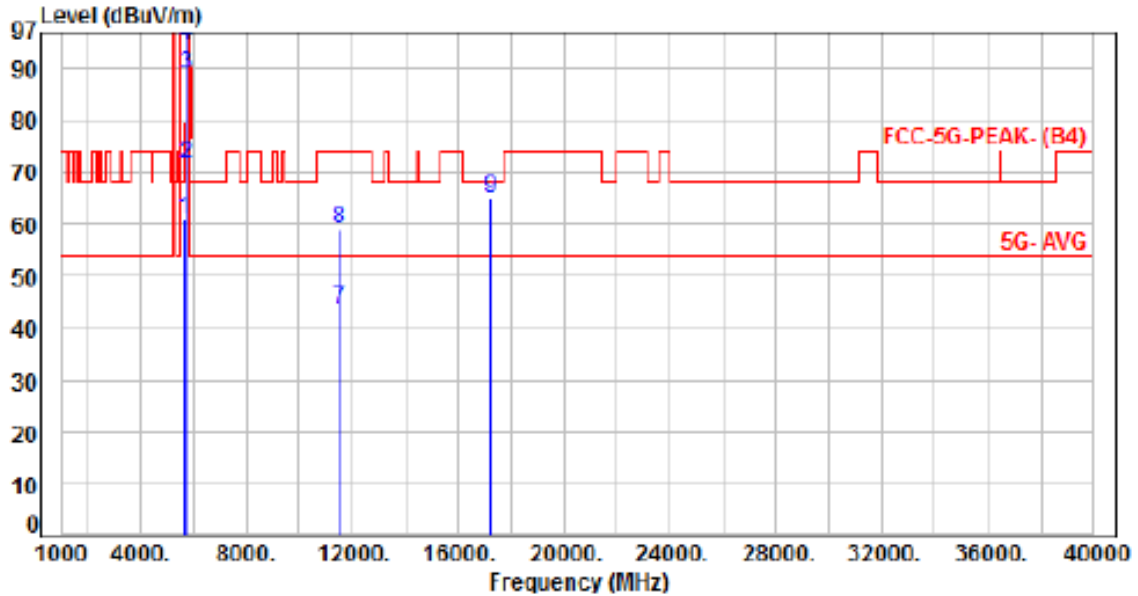

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	54.23	60.85	68.20	-7.35	Peak	129	143	P
2	5700.00	6.86	64.53	71.39	105.20	-33.81	Peak	129	143	P
3	5720.00	6.83	82.21	89.04	110.00	-21.76	Peak	129	143	P
4	5725.00	6.83	87.42	94.25	122.20	-27.95	Peak	129	143	P
5	5745.00	6.80	103.51	110.31	200.00	-89.69	Average	129	143	P
6	5745.00	6.80	116.95	123.75	200.00	-76.25	Peak	129	143	P
7	11490.00	15.18	28.43	43.61	54.00	-10.39	Average	100	61	P
8	11490.00	15.18	43.67	58.85	74.00	-15.15	Peak	100	61	P
9	17235.00	21.58	43.18	64.76	68.20	-3.44	Peak	100	142	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 4, CH149		:




No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	53.65	60.27	68.20	-7.93	Peak	100	114	P
2	5700.00	6.86	58.66	65.52	105.20	-39.68	Peak	100	114	P
3	5720.00	6.83	74.94	81.77	110.00	-29.03	Peak	100	114	P
4	5725.00	6.83	85.56	92.39	122.20	-29.81	Peak	100	114	P
5	5745.00	6.80	103.08	109.88	200.00	-90.12	Average	100	114	P
6	5745.00	6.80	115.89	122.69	200.00	-77.31	Peak	100	114	P
7	11490.00	15.18	28.49	43.67	54.00	-10.33	Average	100	76	P
8	11490.00	15.18	43.55	58.73	74.00	-15.27	Peak	100	76	P
9	17235.00	21.58	43.76	65.34	68.20	-2.86	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 4, CH157		

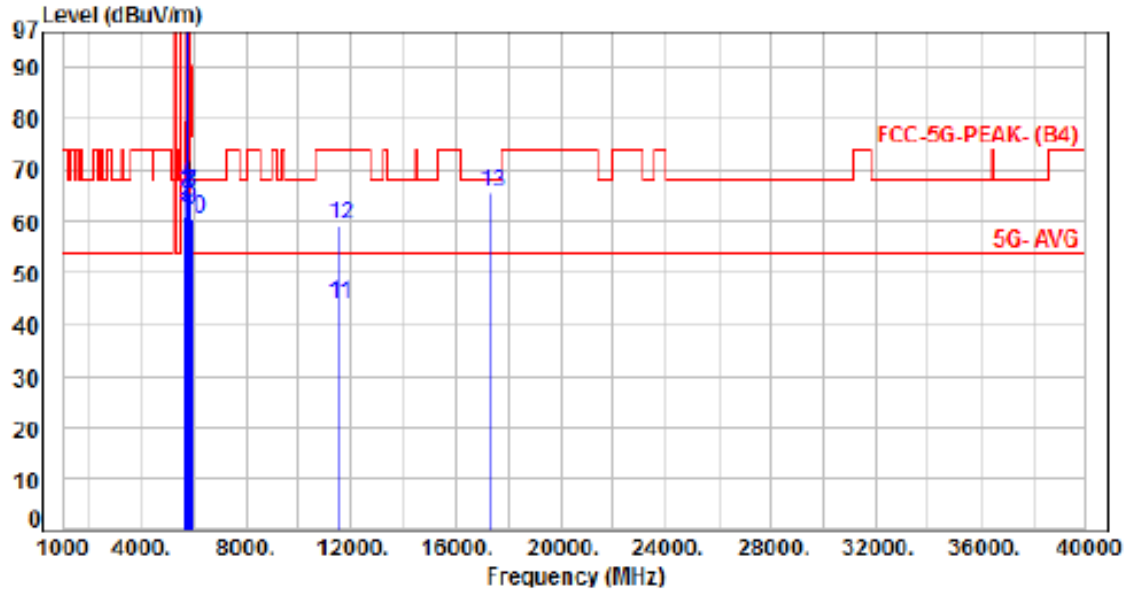


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	54.39	61.01	68.20	-7.19	Peak	108	142	P
2	5700.00	6.86	57.04	63.90	105.20	-41.30	Peak	108	142	P
3	5720.00	6.83	58.29	65.12	110.80	-45.68	Peak	108	142	P
4	5725.00	6.83	60.16	66.99	122.20	-55.21	Peak	108	142	P
5	5785.00	6.81	103.87	110.68	200.00	-89.32	Average	108	142	P
6	5785.00	6.81	117.48	124.29	200.00	-75.71	Peak	108	142	P
7	5850.00	6.86	58.84	65.70	122.20	-56.50	Peak	108	142	P
8	5855.00	6.91	58.80	65.71	110.80	-45.09	Peak	108	142	P
9	5875.00	7.08	55.43	62.51	105.20	-42.69	Peak	108	142	P
10	5925.00	7.32	53.12	60.44	68.20	-7.76	Peak	108	142	P
11	11570.00	15.42	28.35	43.77	54.00	-10.23	Average	100	59	P
12	11570.00	15.42	43.79	59.21	74.00	-14.79	Peak	100	59	P
13	17355.00	22.30	43.25	65.55	68.20	-2.65	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Beamforming

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 4, CH157		:

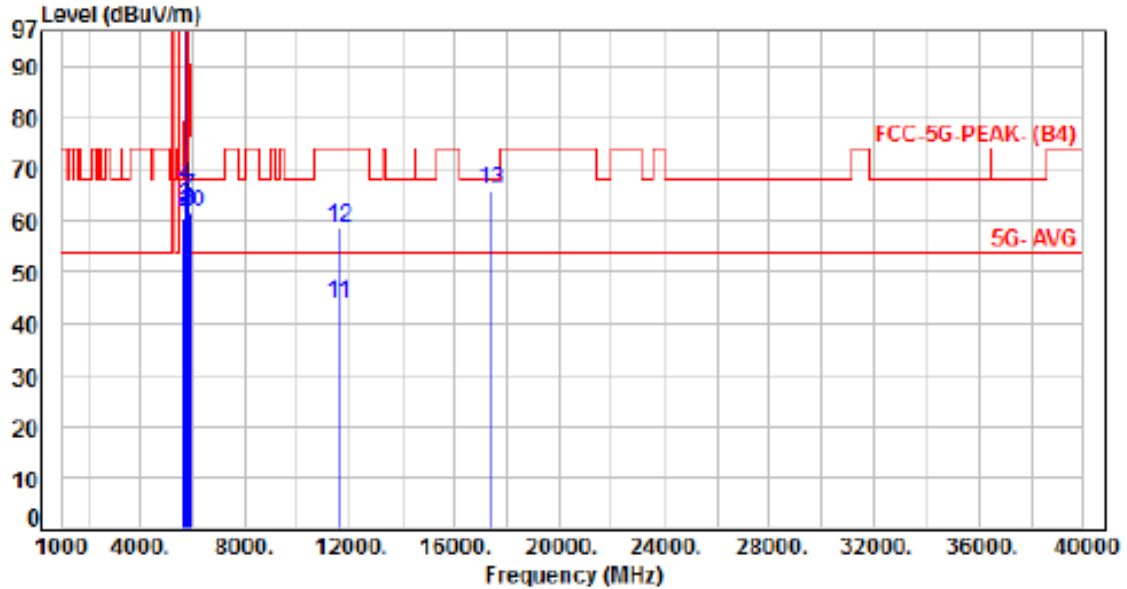

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	53.96	60.58	68.20	-7.62	Peak	100	113	P
2	5700.00	6.86	54.82	61.68	105.20	-43.52	Peak	100	113	P
3	5720.00	6.83	55.99	62.82	110.80	-47.98	Peak	100	113	P
4	5725.00	6.83	59.95	66.78	122.20	-55.42	Peak	100	113	P
5	5785.00	6.81	104.79	111.60	200.00	-88.40	Average	100	113	P
6	5785.00	6.81	117.73	124.54	200.00	-75.46	Peak	100	113	P
7	5850.00	6.86	57.56	64.42	122.20	-57.78	Peak	100	113	P
8	5855.00	6.91	55.20	62.11	110.80	-48.69	Peak	100	113	P
9	5875.00	7.08	54.68	61.76	105.20	-43.44	Peak	100	113	P
10	5925.00	7.32	54.22	61.54	68.20	-6.66	Peak	100	113	P
11	11570.00	15.42	28.42	43.84	54.00	-10.16	Average	100	77	P
12	11570.00	15.42	43.28	58.70	74.00	-15.30	Peak	100	77	P
13	17355.00	22.30	43.66	65.96	68.20	-2.24	Peak	100	106	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor