



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

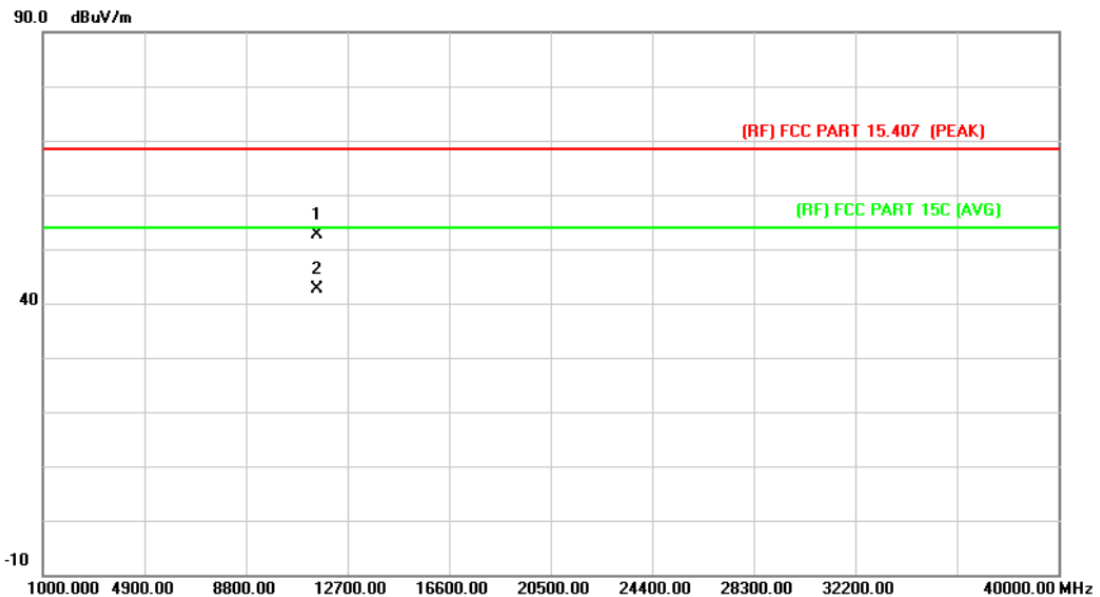

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11509.080	30.78	21.82	52.60	68.30	-15.70	peak
2	*	11510.800	20.88	21.82	42.70	54.00	-11.30	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

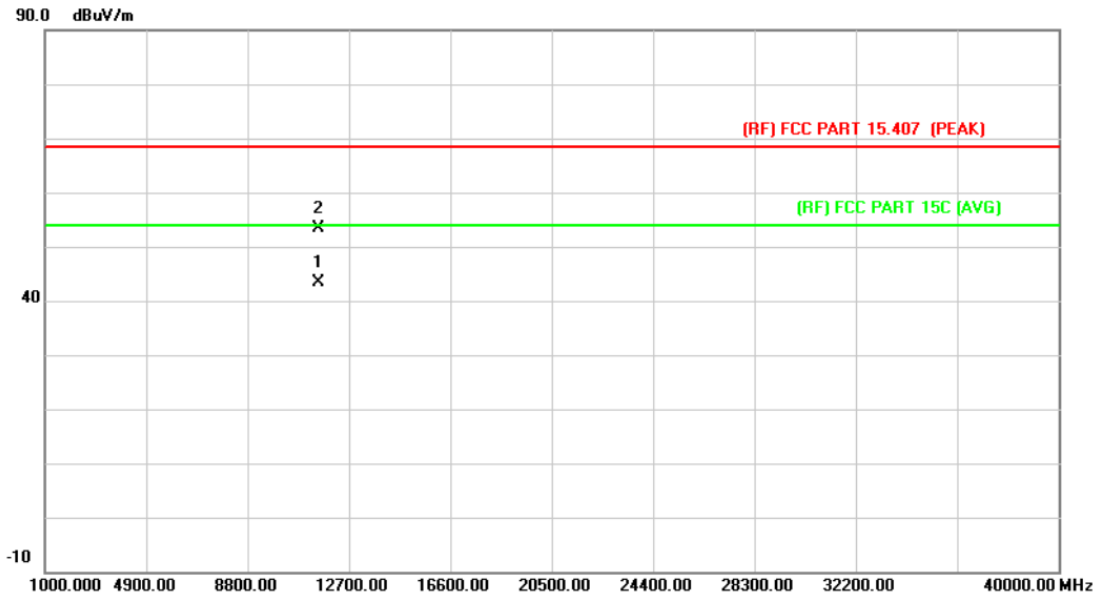

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11510.748	21.64	21.82	43.46	54.00	-10.54	AVG
2		11511.496	31.48	21.82	53.30	68.30	-15.00	peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

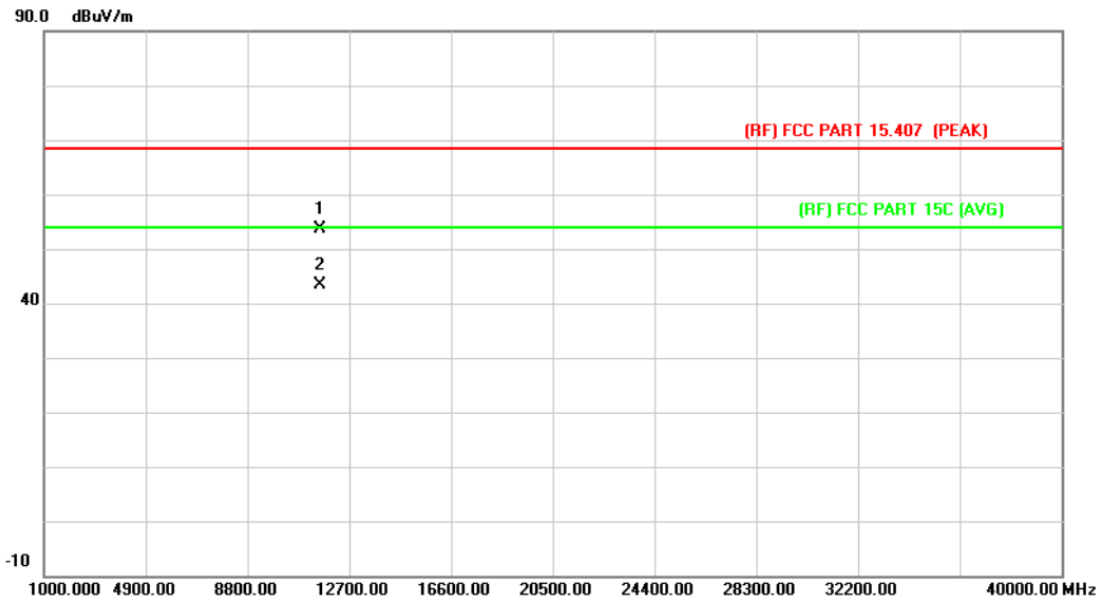


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11588.983	31.72	21.90	53.62	68.30	-14.68	peak
2	*	11589.993	21.43	21.90	43.33	54.00	-10.67	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

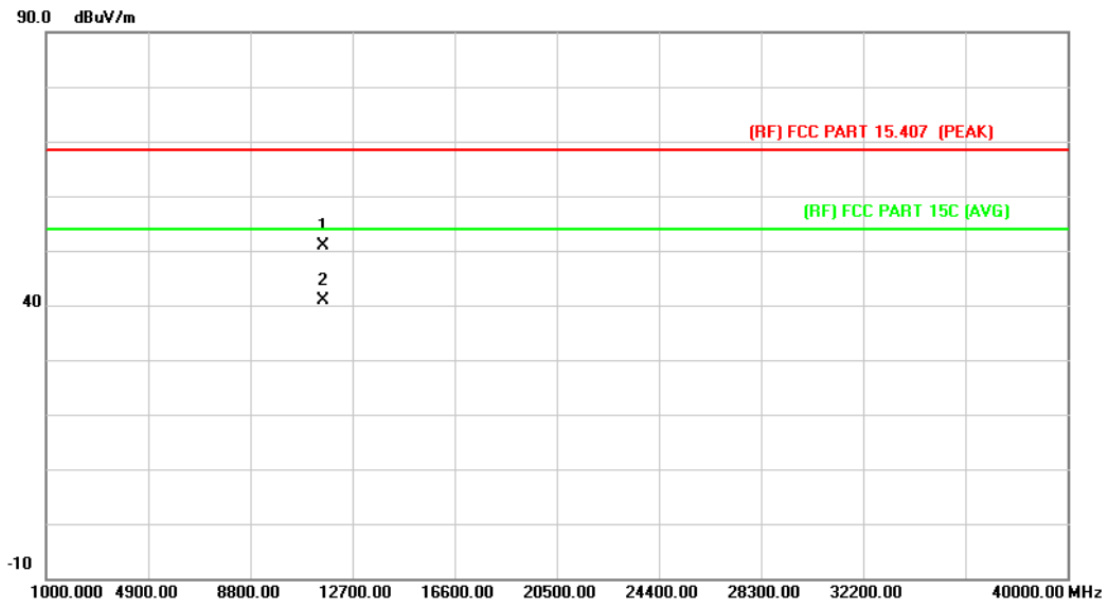

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11589.993	29.04	21.90	50.94	68.30	-17.36	peak
2	*	11590.591	18.93	21.90	40.83	54.00	-13.17	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

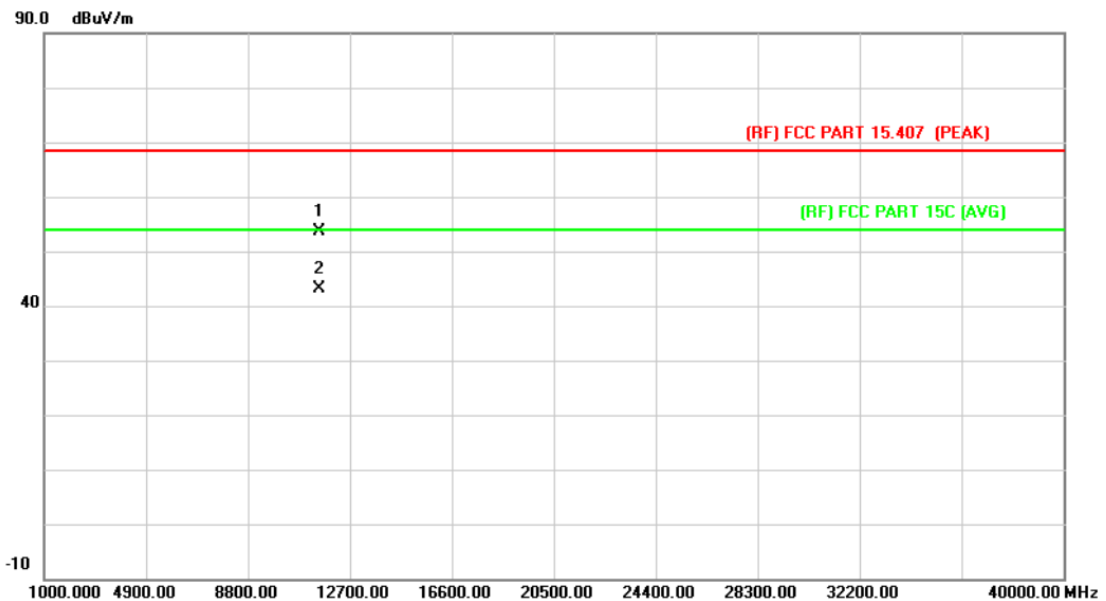

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11509.259	31.83	21.82	53.65	68.30	-14.65	peak
2	*	11510.127	21.28	21.82	43.10	54.00	-10.90	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

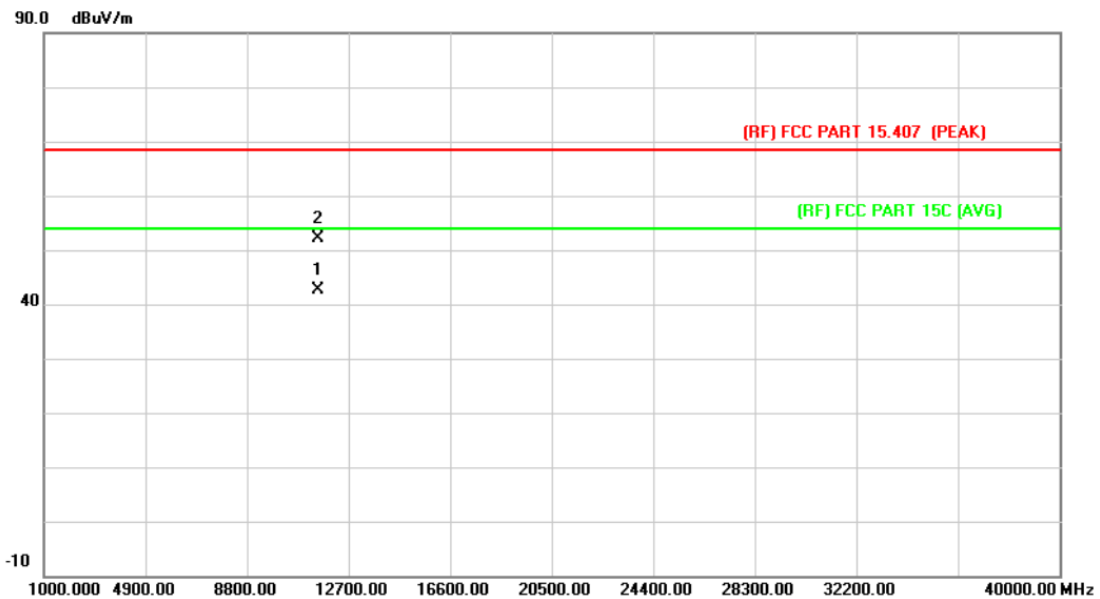


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11510.980	20.87	21.82	42.69	54.00	-11.31	AVG
2		11511.332	30.43	21.82	52.25	68.30	-16.05	peak

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

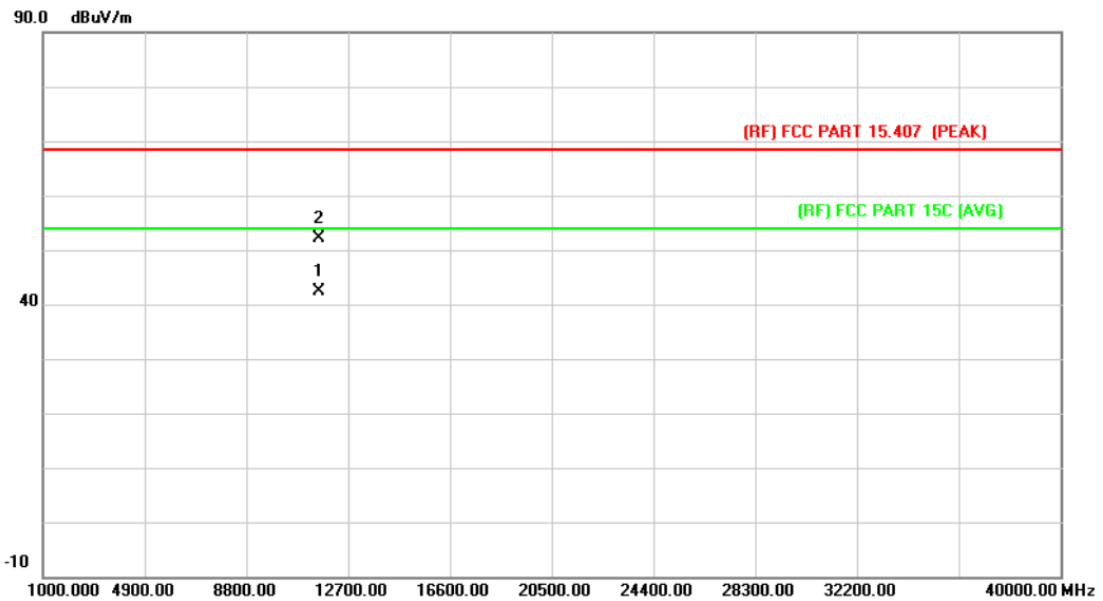

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11589.828	20.51	21.90	42.41	54.00	-11.59	AVG
2		11590.860	30.26	21.90	52.16	68.30	-16.14	peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

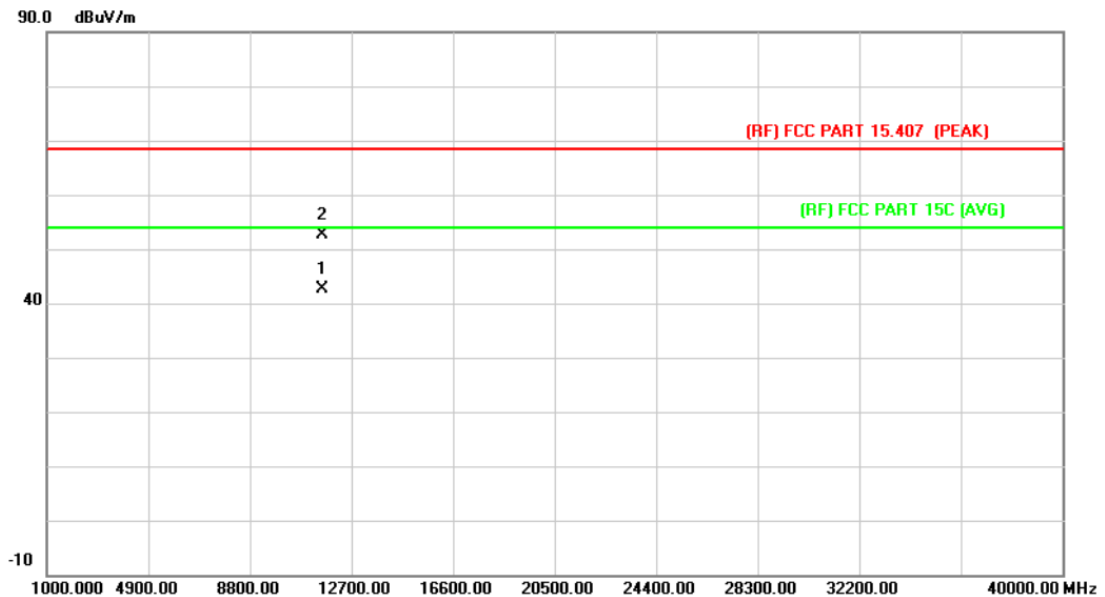


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11588.623	20.77	21.90	42.67	54.00	-11.33	AVG
2		11589.200	30.68	21.90	52.58	68.30	-15.72	peak

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

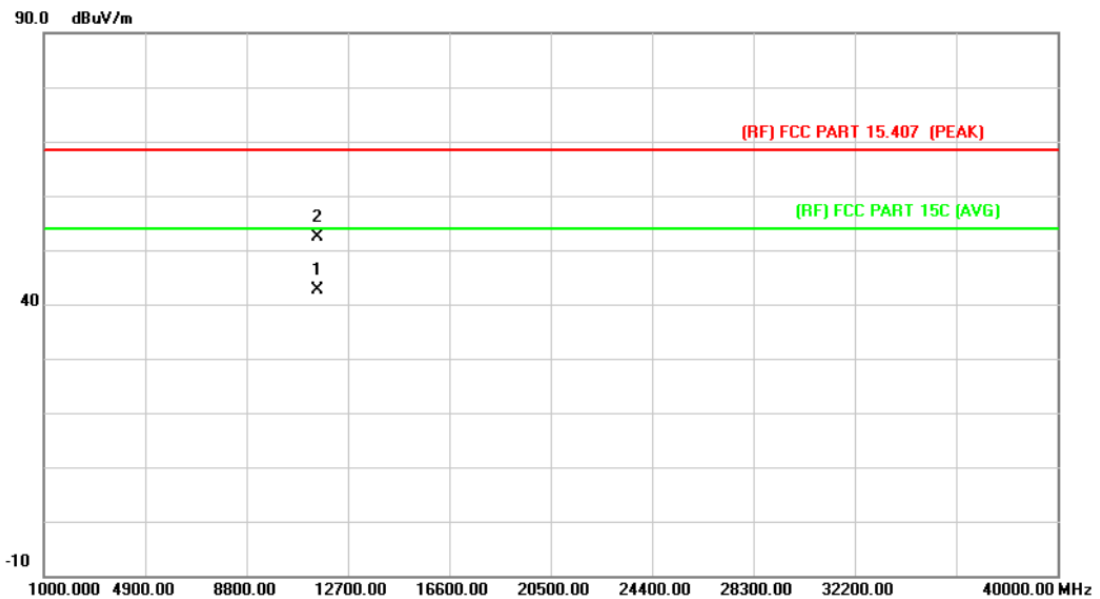

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	11549.611	20.70	21.86	42.56	54.00	-11.44	AVG
2		11551.302	30.63	21.86	52.49	68.30	-15.81	peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)		
<b>Remark:</b>	No report for the emission which more than 15 dB below the prescribed limit.		

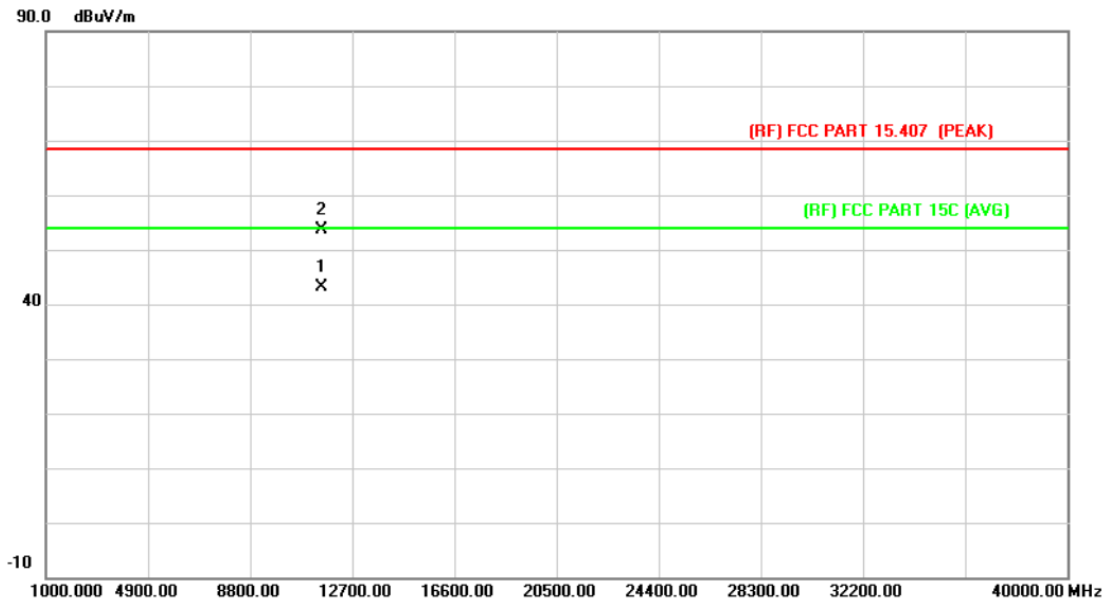

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11548.594	21.33	21.86	43.19	54.00	-10.81	AVG
2		11548.870	31.88	21.86	53.74	68.30	-14.56	peak

Emission Level= Read Level+ Correct Factor

# Attachment C-- Restricted Bands Requirement and Band-edge Test Data

## (1) Radiation Test

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:			


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	47.29	13.54	60.83	68.30	-7.47	peak
2		5150.000	36.29	13.54	49.83	54.00	-4.17	AVG
3	*	5175.600	91.24	13.52	104.76	Fundamental Frequency		AVG
4	X	5176.400	101.43	13.52	114.95	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor




Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:			

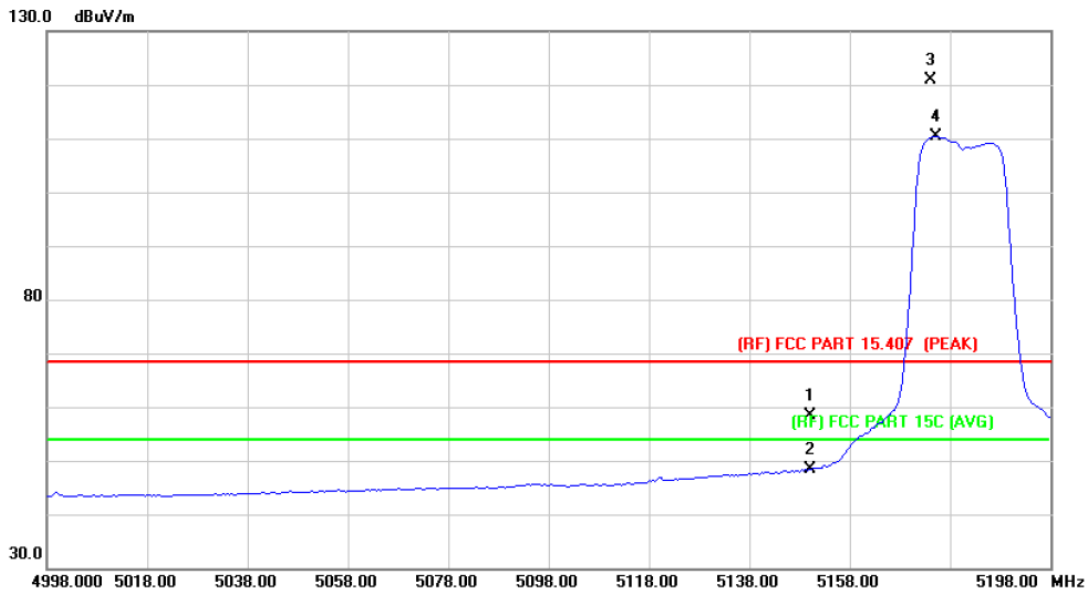

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	44.85	13.54	58.39	68.30	-9.91	peak
2		5150.000	34.78	13.54	48.32	54.00	-5.68	AVG
3	X	5174.000	107.34	13.52	120.86			Fundamental Frequency peak
4	*	5175.200	96.86	13.52	110.38			Fundamental Frequency AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5240 MHz (U-NII-1)		
<b>Remark:</b>			

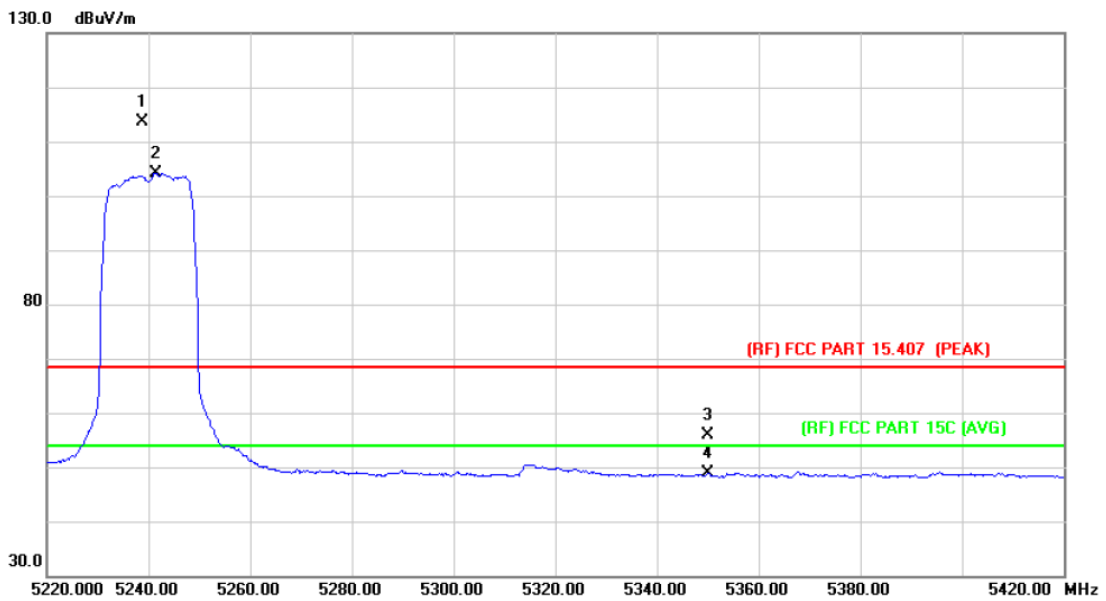


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5238.680	100.07	13.47	113.54	Fundamental Frequency		peak
2	*	5241.400	90.76	13.48	104.24	Fundamental Frequency		AVG
3		5350.000	42.54	13.40	55.94	68.30	-12.36	peak
4		5350.000	35.44	13.40	48.84	54.00	-5.16	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5240 MHz (U-NII-1)		
<b>Remark:</b>			

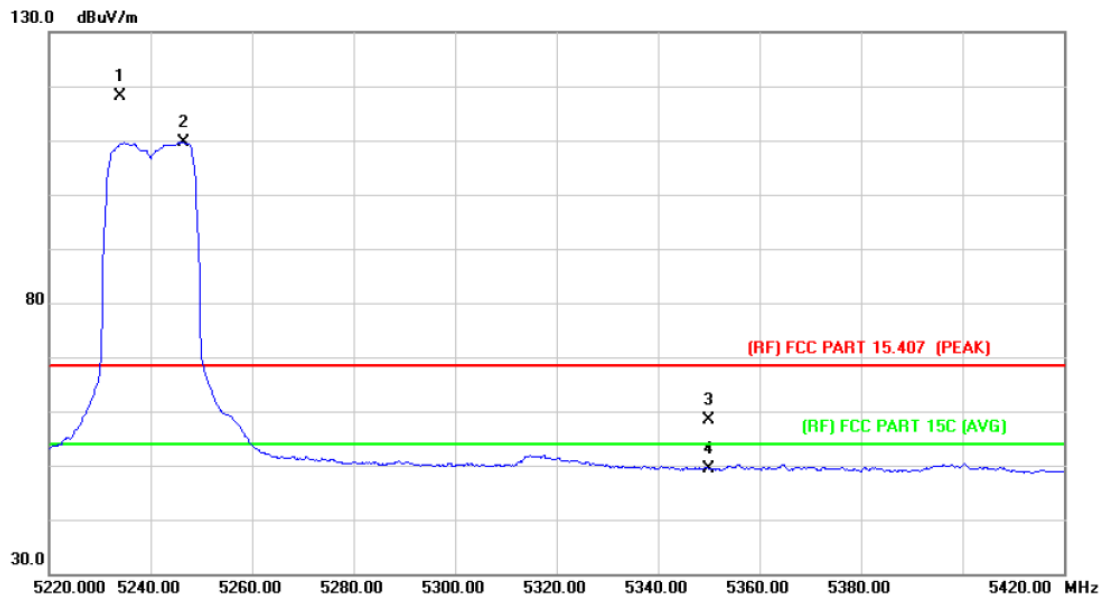


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5233.890	104.73	13.48	118.21	Fundamental Frequency		peak
2	*	5246.400	96.09	13.47	109.56	Fundamental Frequency		AVG
3		5350.000	44.93	13.40	58.33	68.30	-9.97	peak
4		5350.000	36.02	13.40	49.42	54.00	-4.58	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)		
<b>Remark:</b>			

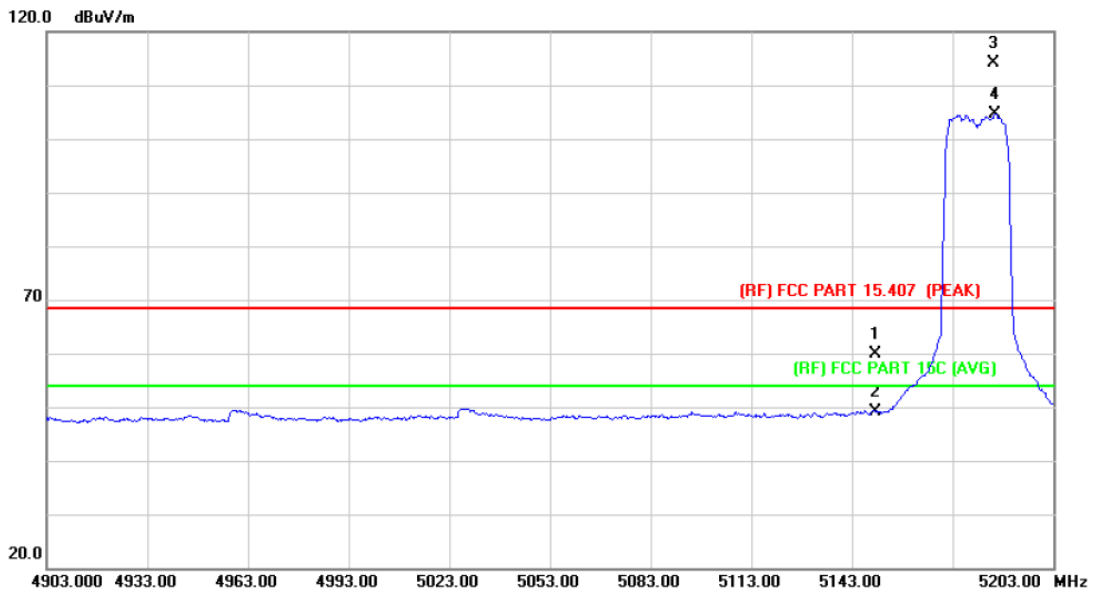

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.36	13.54	59.90	68.30	-8.40	peak
2		5150.000	35.70	13.54	49.24	54.00	-4.76	AVG
3	X	5185.170	100.65	13.52	114.17	Fundamental Frequency		peak
4	*	5185.600	91.09	13.52	104.61	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)		
Remark:			

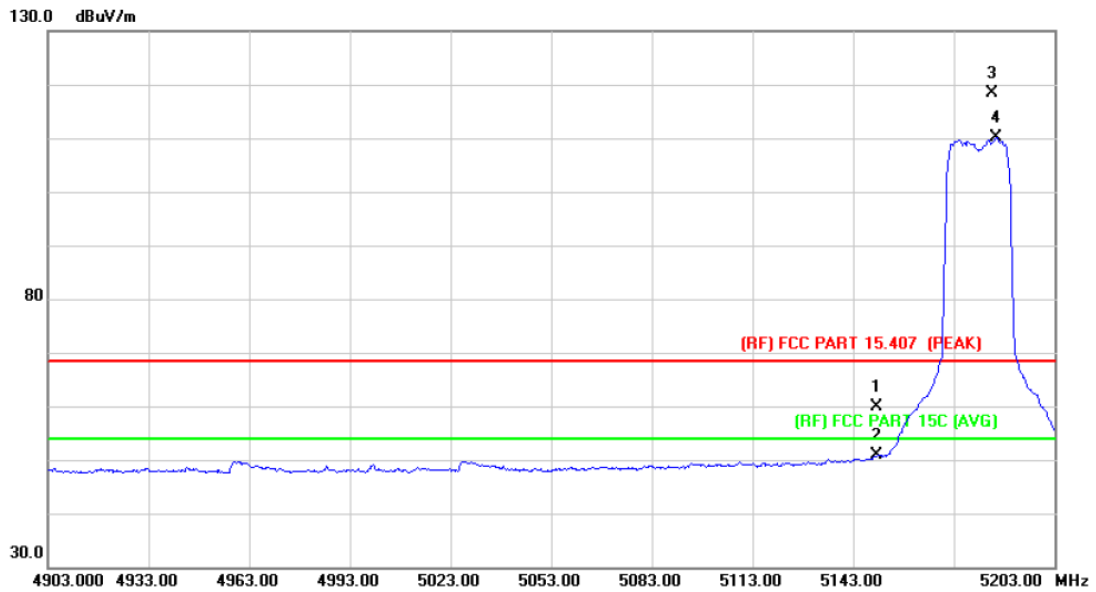


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.37	13.54	59.91	68.30	-8.39	peak
2		5150.000	37.31	13.54	50.85	54.00	-3.15	AVG
3	X	5184.570	104.77	13.52	118.29	Fundamental Frequency		peak
4	*	5185.600	96.57	13.52	110.09	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
<b>Remark:</b>			

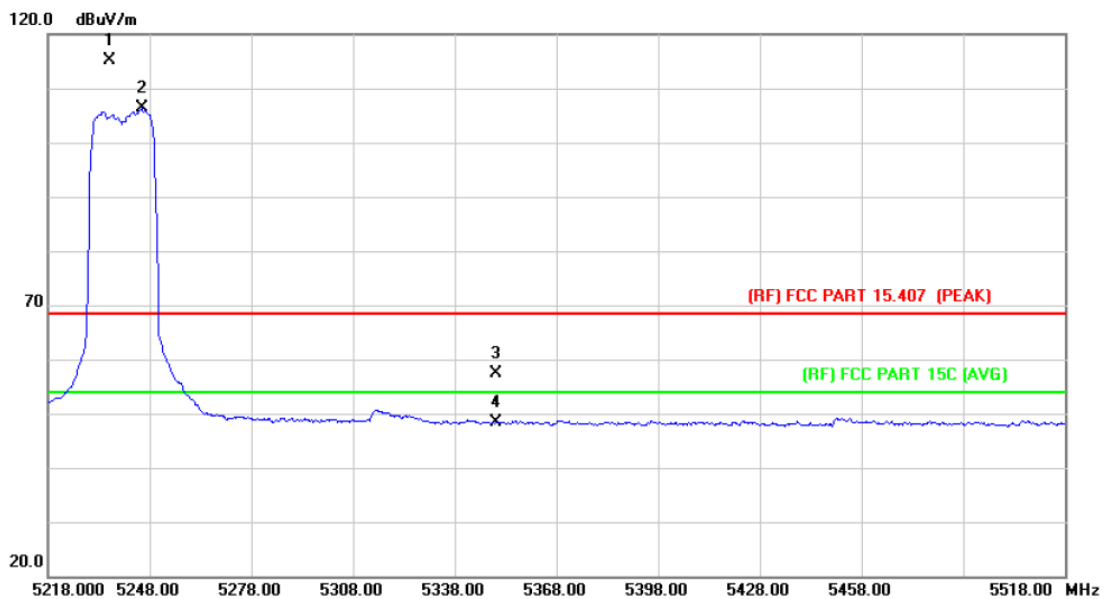


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5236.130	101.58	13.48	115.06	Fundamental Frequency		peak
2	*	5245.600	92.82	13.47	106.29	Fundamental Frequency		AVG
3		5350.000	44.07	13.40	57.47	68.30	-10.83	peak
4		5350.000	34.93	13.40	48.33	54.00	-5.67	AVG

Emission Level= Read Level+ Correct Factor




Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
Remark:			

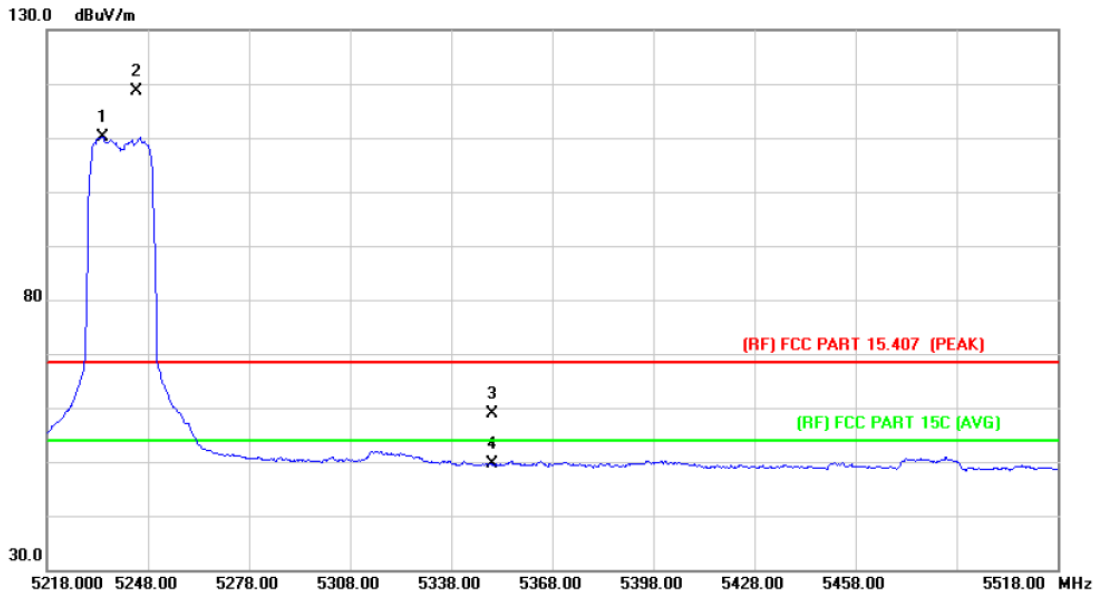

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5234.500	96.71	13.48	110.19	Fundamental Frequency		AVG
2	X	5244.520	105.17	13.47	118.64	Fundamental Frequency		peak
3		5350.000	45.53	13.40	58.93	68.30	-9.37	peak
4		5350.000	36.11	13.40	49.51	54.00	-4.49	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
<b>Remark:</b>			

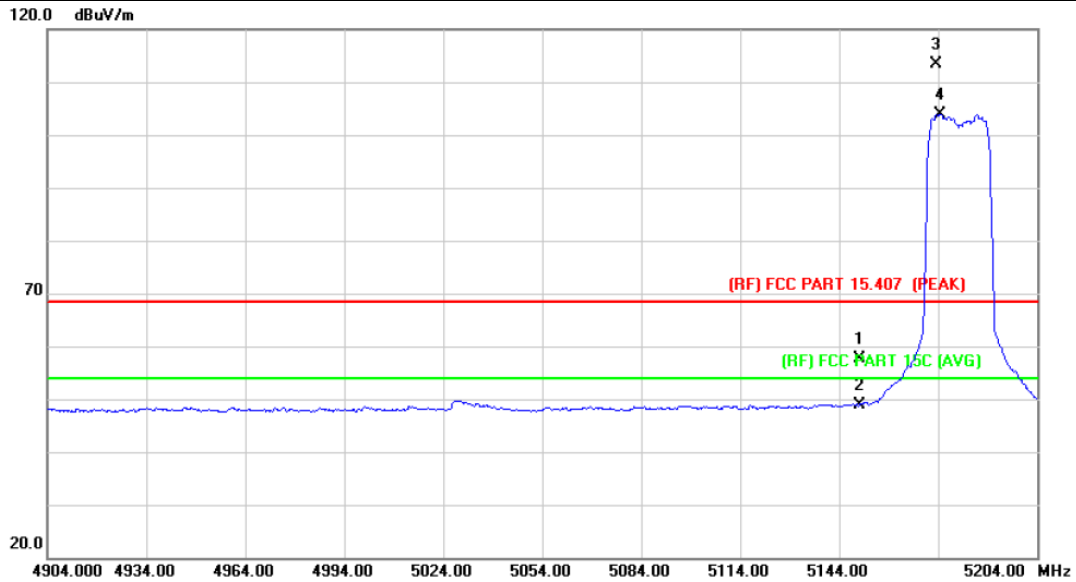


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	44.21	13.54	57.75	68.30	-10.55	peak
2		5150.000	35.44	13.54	48.98	54.00	-5.02	AVG
3	X	5173.280	99.75	13.52	113.27			Fundamental Frequency peak
4	*	5174.600	90.39	13.52	103.91			Fundamental Frequency AVG

Emission Level= Read Level+ Correct Factor



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
Remark:			

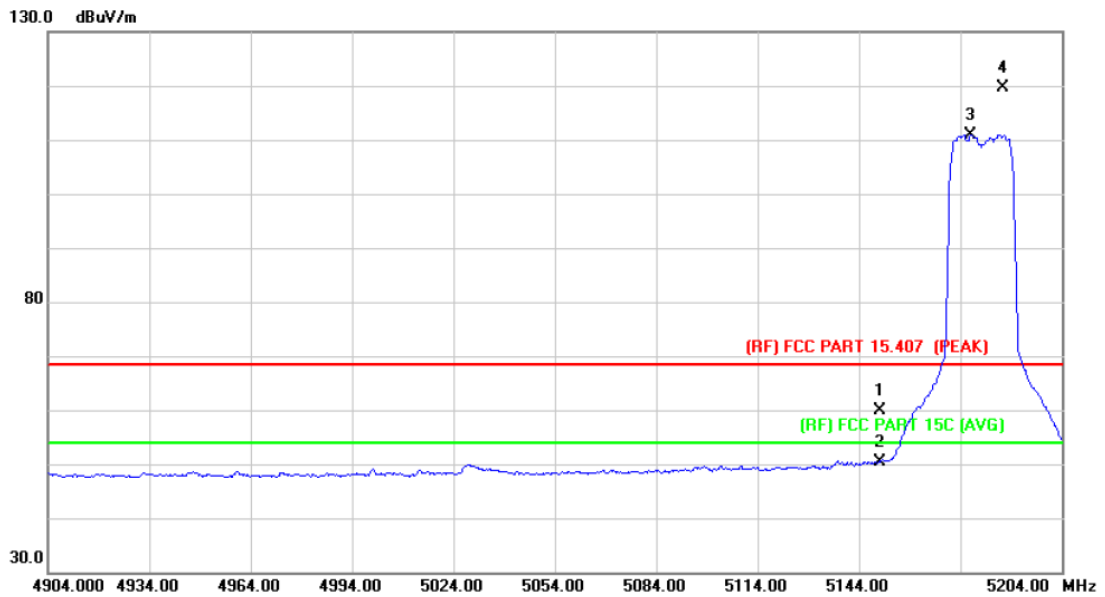


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.39	13.54	59.93	68.30	-8.37	peak
2		5150.000	36.88	13.54	50.42	54.00	-3.58	AVG
3	*	5177.000	97.40	13.52	110.92	Fundamental Frequency		AVG
4	X	5186.470	106.07	13.52	119.59	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
<b>Remark:</b>			

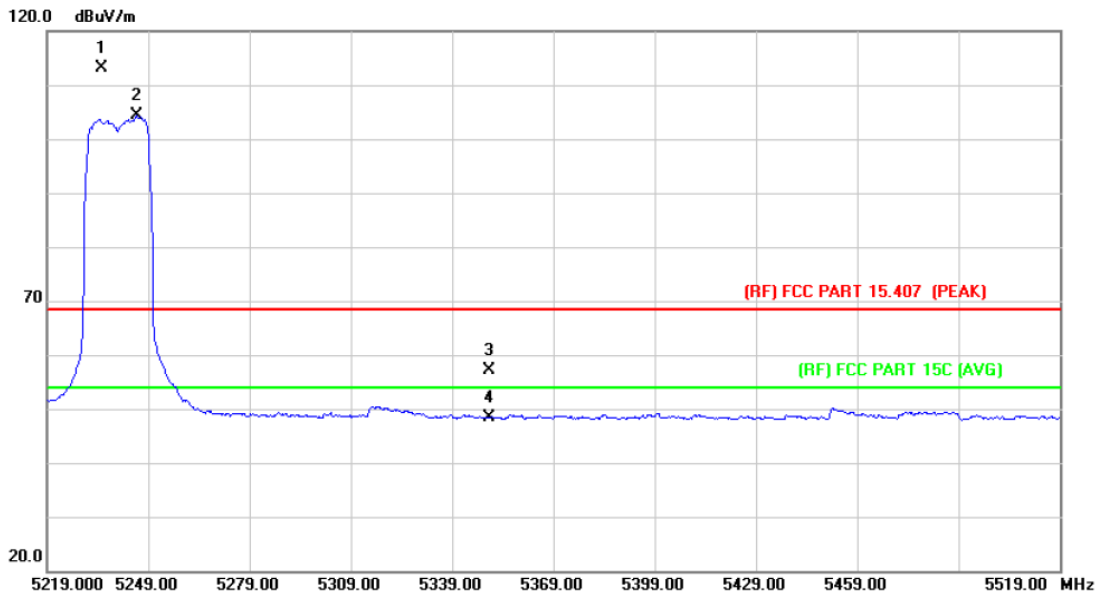

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5235.330	99.65	13.48	113.13	Fundamental Frequency		peak
2	*	5245.400	90.90	13.47	104.37	Fundamental Frequency		AVG
3		5350.000	43.72	13.40	57.12	68.30	-11.18	peak
4		5350.000	34.91	13.40	48.31	54.00	-5.69	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
Remark:			

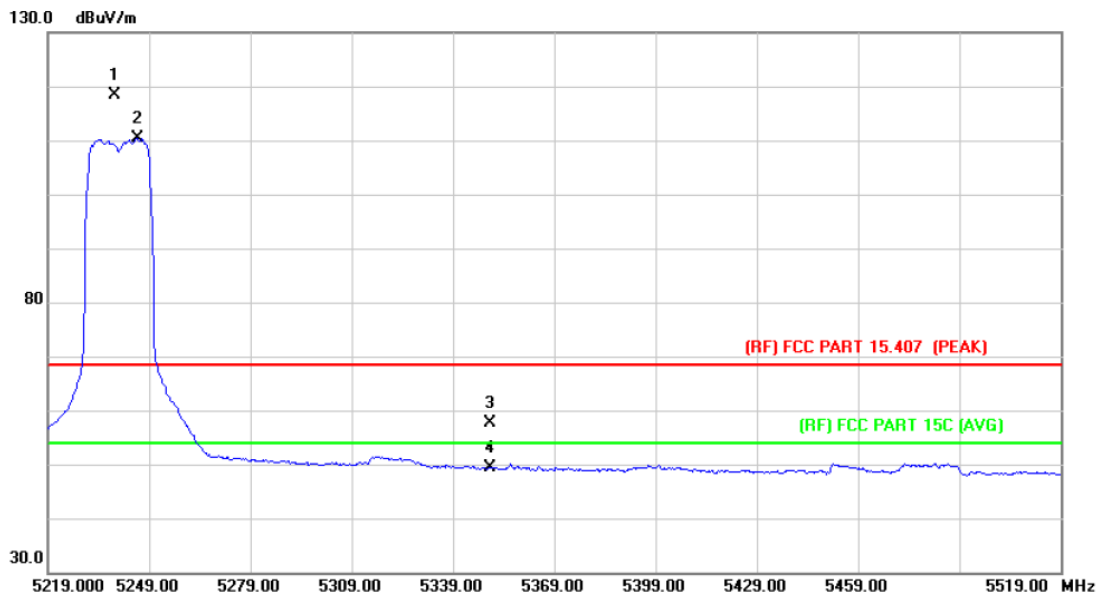


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5238.930	105.00	13.47	118.47	Fundamental Frequency		peak
2	*	5245.400	97.00	13.47	110.47	Fundamental Frequency		AVG
3		5350.000	44.30	13.40	57.70	68.30	-10.60	peak
4		5350.000	36.06	13.40	49.46	54.00	-4.54	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
<b>Remark:</b>			

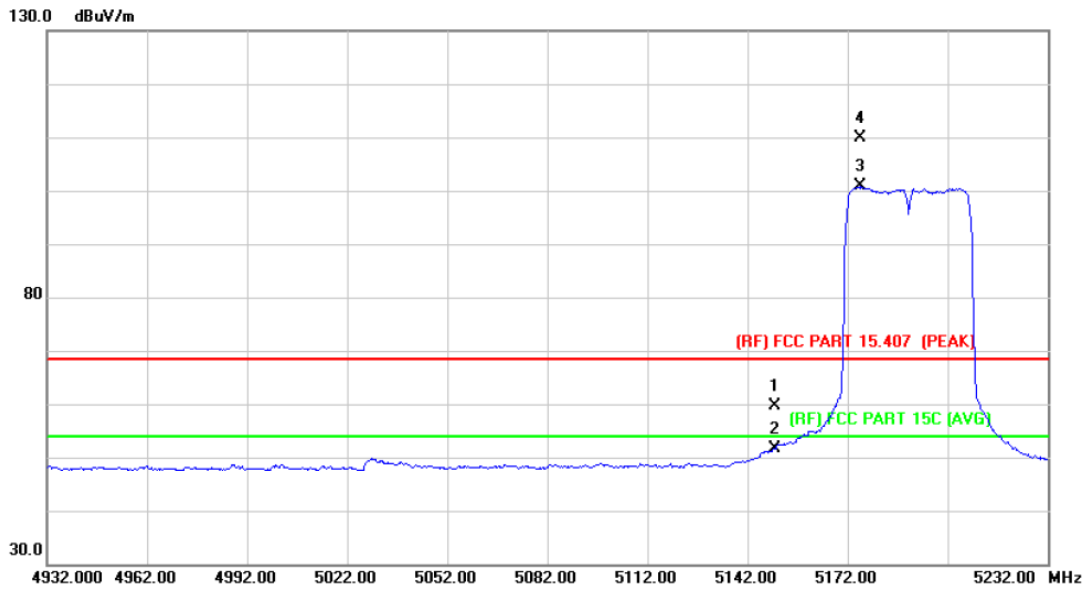


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.12	13.54	59.66	68.30	-8.64	peak
2		5150.000	38.05	13.54	51.59	54.00	-2.41	AVG
3	*	5175.600	87.26	13.52	100.78	Fundamental Frequency		AVG
4	X	5175.810	96.40	13.52	109.92	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
<b>Remark:</b>			

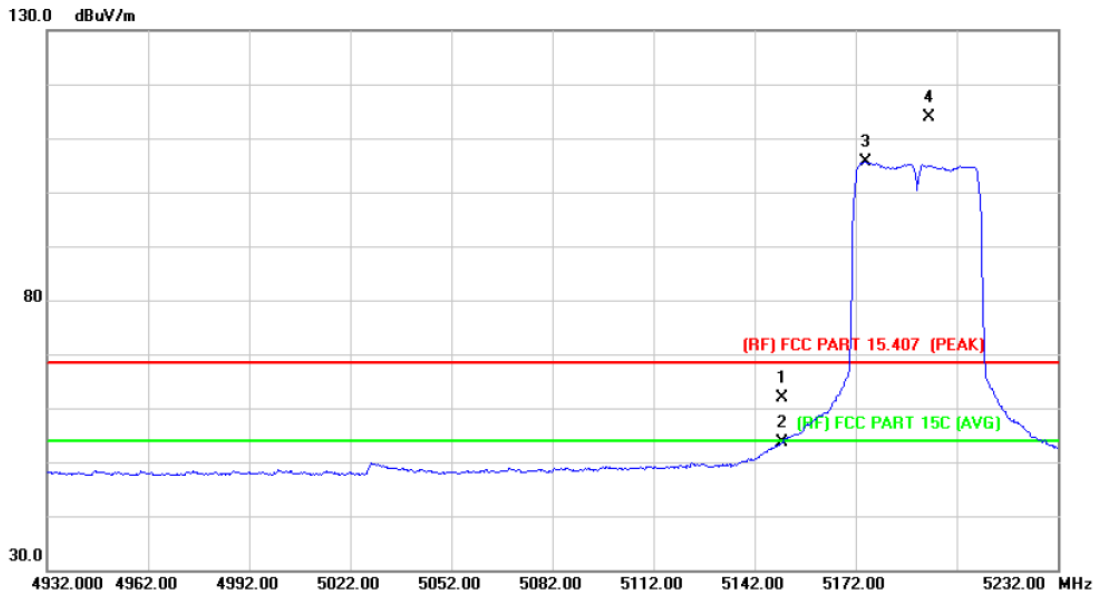

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	48.25	13.54	61.79	68.30	-6.51	peak
2		5150.000	40.01	13.54	53.55	54.00	-0.45	AVG
3	*	5175.000	92.08	13.52	105.60	Fundamental Frequency		AVG
4	X	5193.790	100.27	13.51	113.78	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:			

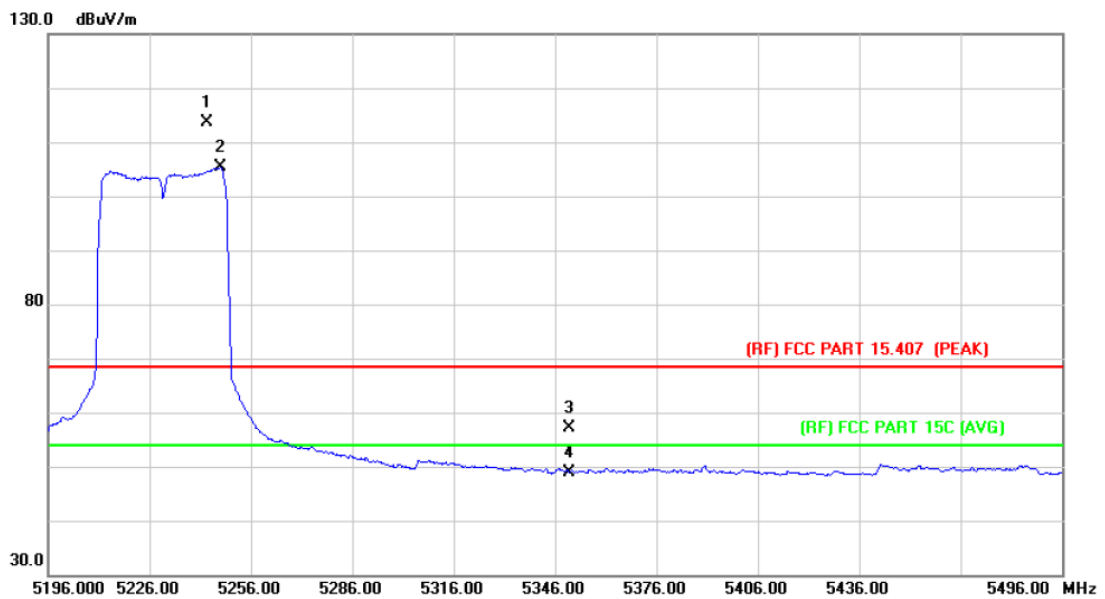


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5242.900	100.06	13.48	113.54	Fundamental Frequency		peak
2	*	5247.000	91.81	13.47	105.28	Fundamental Frequency		AVG
3		5350.000	43.84	13.40	57.24	68.30	-11.06	peak
4		5350.000	35.53	13.40	48.93	54.00	-5.07	AVG

Emission Level= Read Level+ Correct Factor



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:			

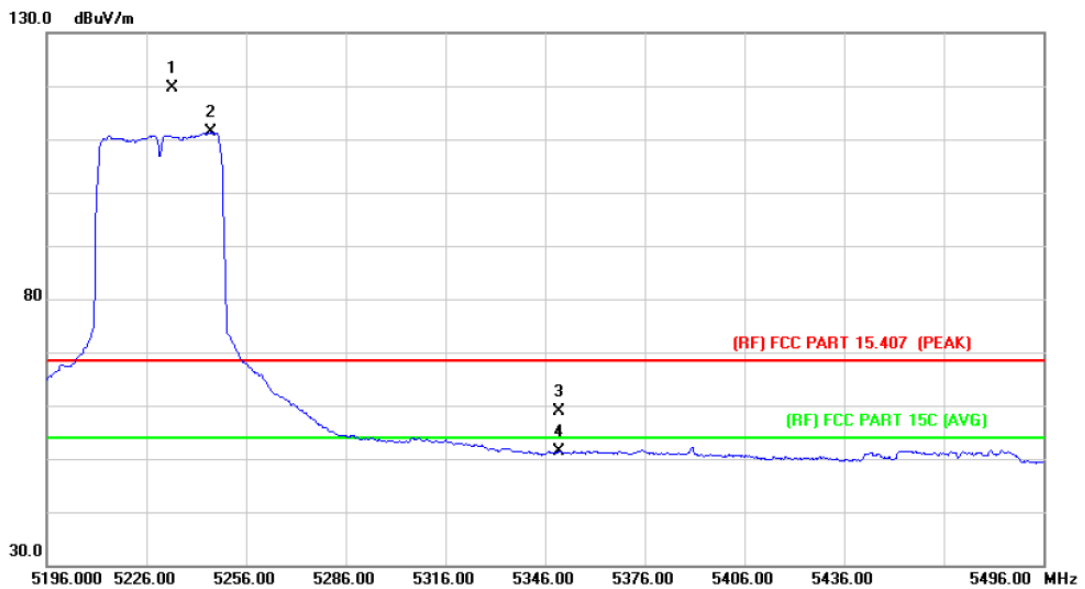


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5233.610	106.11	13.48	119.59			peak
2	*	5245.200	97.79	13.47	111.26			AVG
3		5350.000	45.53	13.40	58.93	68.30	-9.37	peak
4		5350.000	38.08	13.40	51.48	54.00	-2.52	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
<b>Remark:</b>			

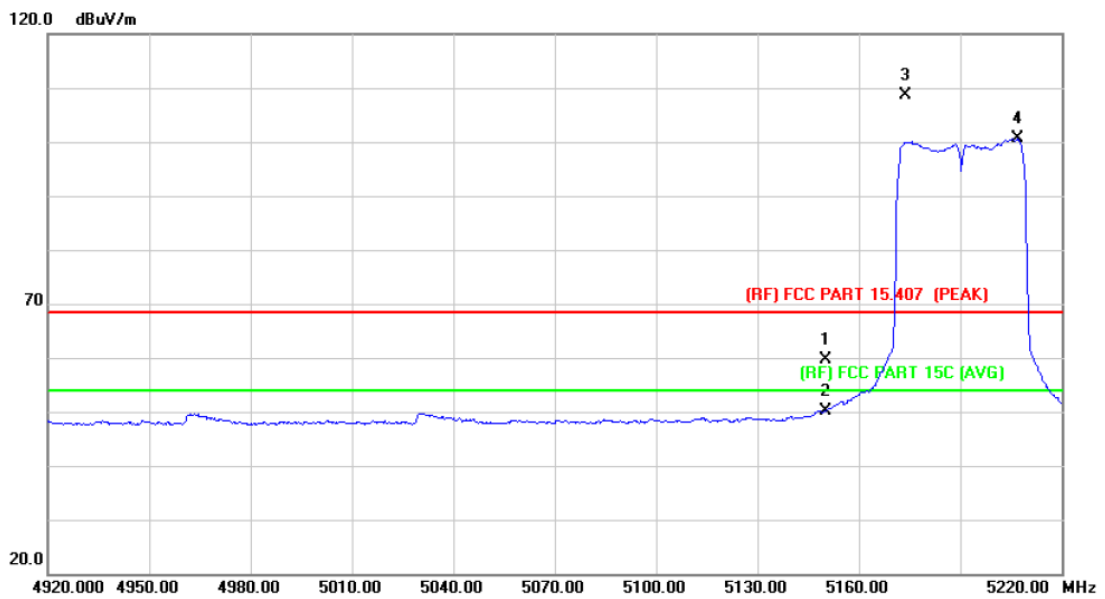

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	45.99	13.54	59.53	68.30	-8.77	peak
2		5150.000	36.62	13.54	50.16	54.00	-3.84	AVG
3	X	5173.700	95.19	13.52	108.71	Fundamental Frequency		peak
4	*	5207.100	87.10	13.50	100.60	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
<b>Remark:</b>			

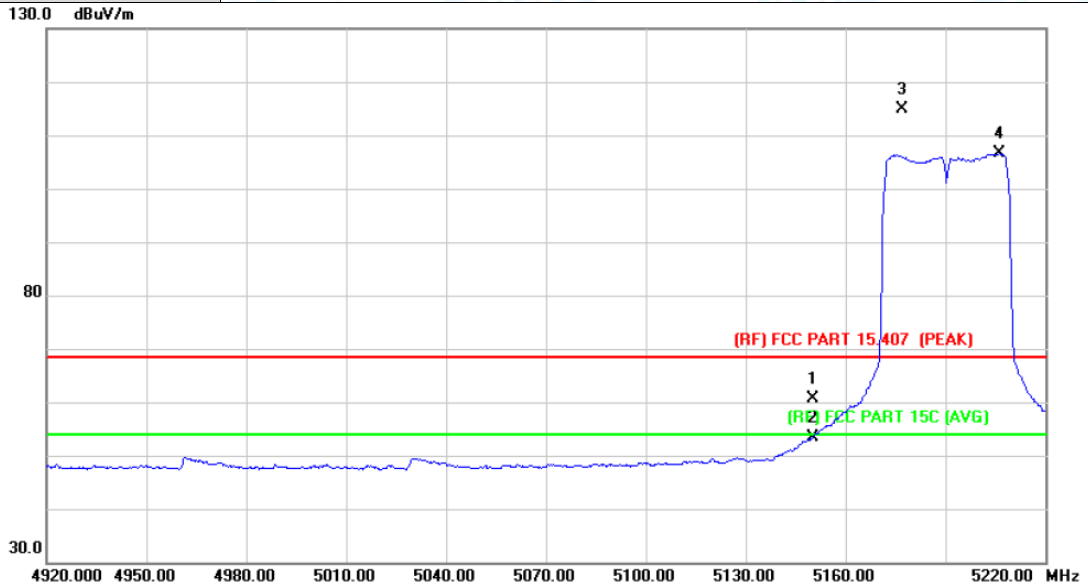


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	47.11	13.54	60.65	68.30	-7.65	peak
2		5150.000	39.76	13.54	53.30	54.00	-0.70	AVG
3	X	5176.990	101.38	13.52	114.90	Fundamental Frequency		peak
4	*	5206.200	93.07	13.51	106.58	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
<b>Remark:</b>			

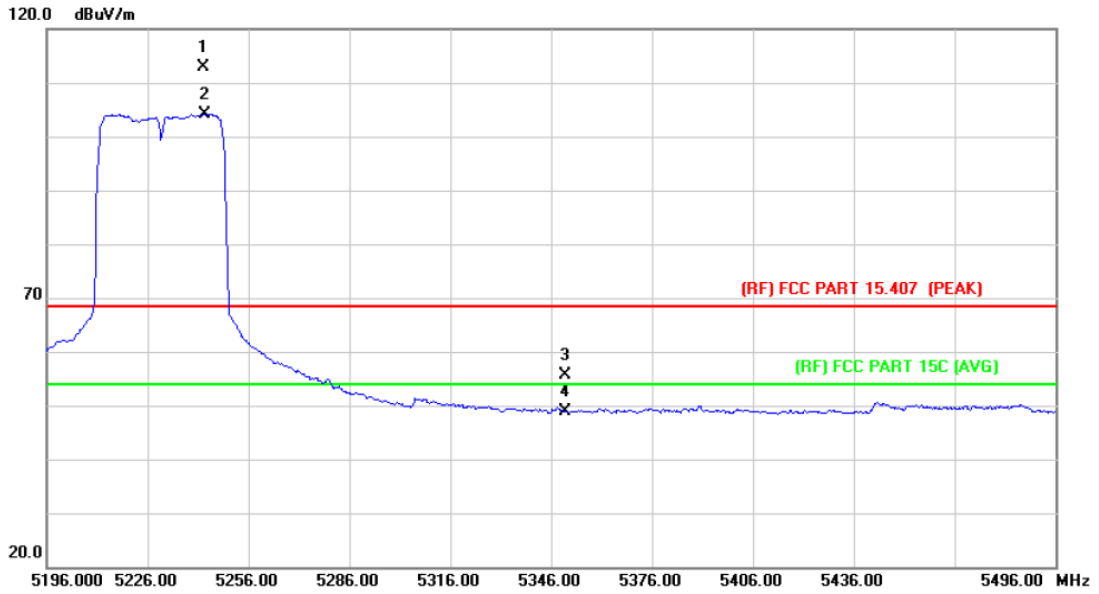


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5242.600	99.33	13.48	112.81	Fundamental Frequency		peak
2	*	5242.800	90.66	13.48	104.14	Fundamental Frequency		AVG
3		5350.000	42.24	13.40	55.64	68.30	-12.66	peak
4		5350.000	35.51	13.40	48.91	54.00	-5.09	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
<b>Remark:</b>			

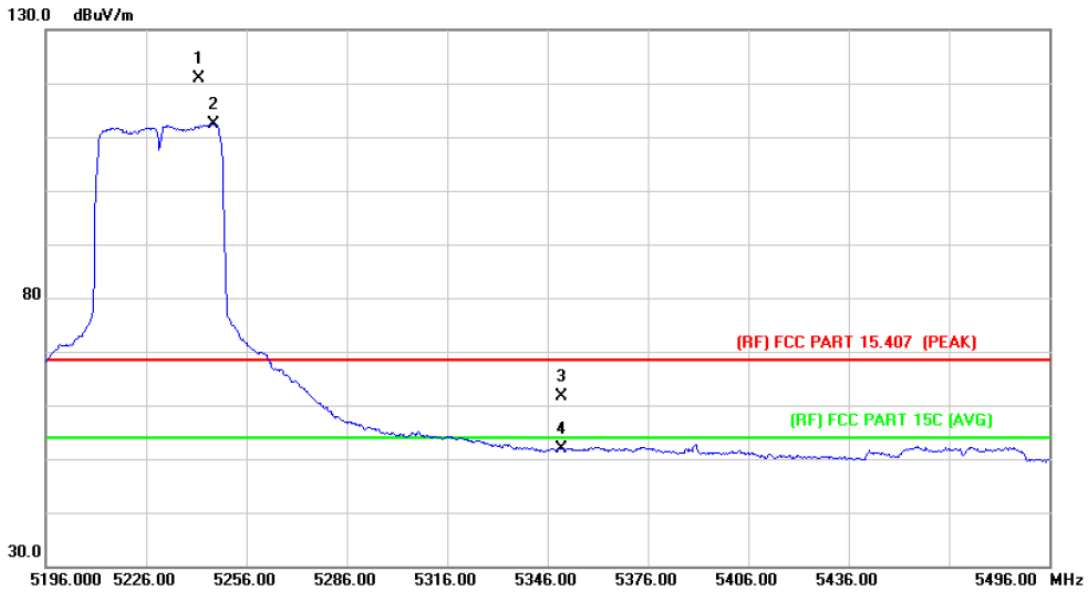

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5241.700	107.30	13.48	120.78	Fundamental Frequency		peak
2	*	5246.100	98.86	13.47	112.33	Fundamental Frequency		AVG
3		5350.000	48.27	13.40	61.67	68.30	-6.63	peak
4		5350.000	38.41	13.40	51.81	54.00	-2.19	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:			

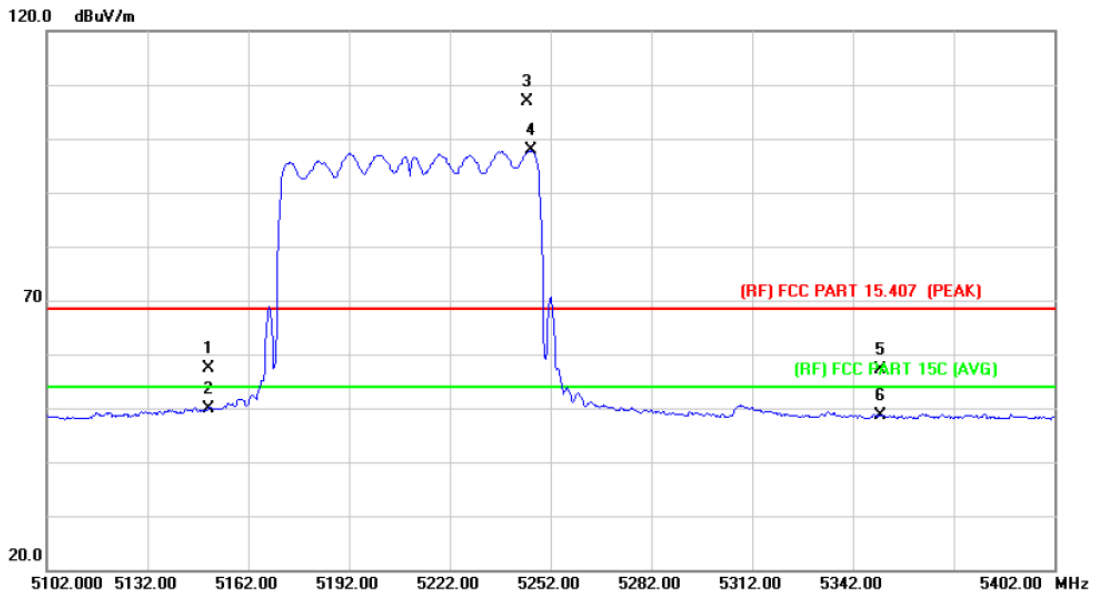


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	43.94	13.54	57.48	68.30	-10.82	peak
2		5150.000	36.24	13.54	49.78	54.00	-4.22	AVG
3	X	5245.110	93.31	13.47	106.78	Fundamental Frequency		peak
4	*	5246.000	84.34	13.47	97.81	Fundamental Frequency		AVG
5		5350.000	43.67	13.40	57.07	68.30	-11.23	peak
6		5350.000	35.30	13.40	48.70	54.00	-5.30	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
<b>Remark:</b>			

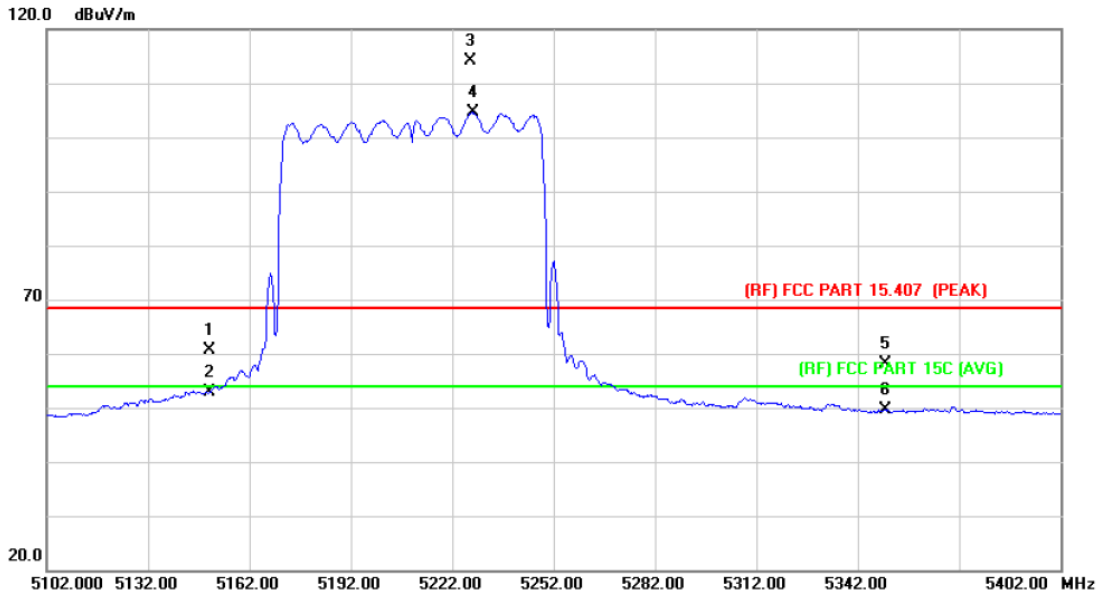


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	47.02	13.54	60.56	68.30	-7.74	peak
2		5150.000	39.34	13.54	52.88	54.00	-1.12	AVG
3	X	5227.420	100.58	13.49	114.07	Fundamental Frequency		peak
4	*	5228.000	91.04	13.49	104.53	Fundamental Frequency		AVG
5		5350.000	44.63	13.40	58.03	68.30	-10.27	peak
6		5350.000	36.27	13.40	49.67	54.00	-4.33	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5260 MHz (U-NII-2A)		
<b>Remark:</b>			

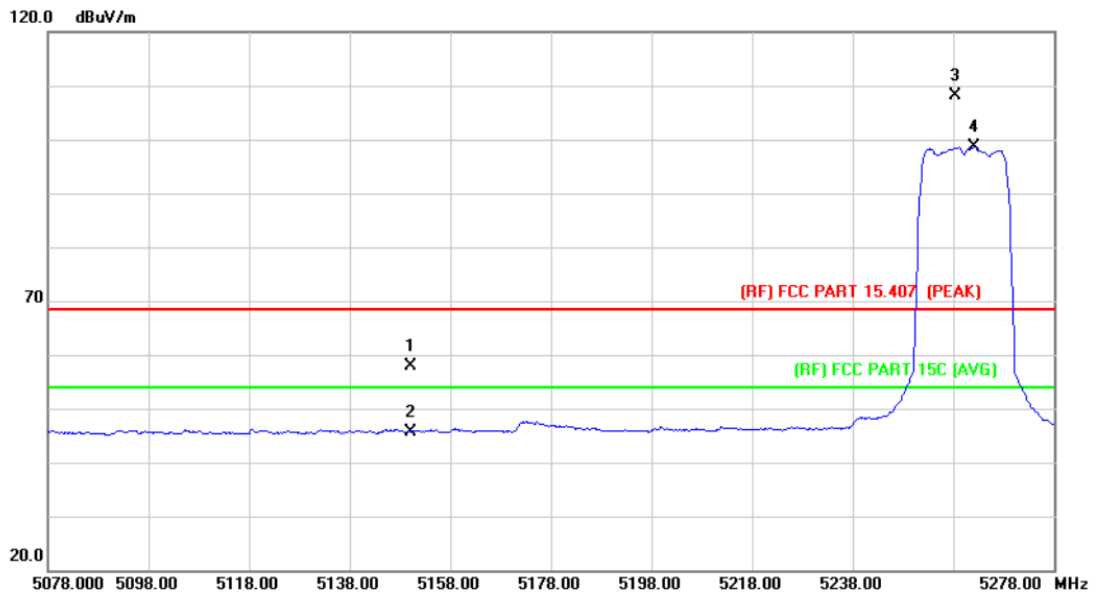

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	47.05	10.84	57.89	68.30	-10.41	peak
2		5150.000	34.83	10.84	45.67	54.00	-8.33	AVG
3	X	5258.520	97.19	10.85	108.04	Fundamental Frequency		peak
4	*	5262.200	87.80	10.86	98.66	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5260 MHz (U-NII-2A)		
Remark:			

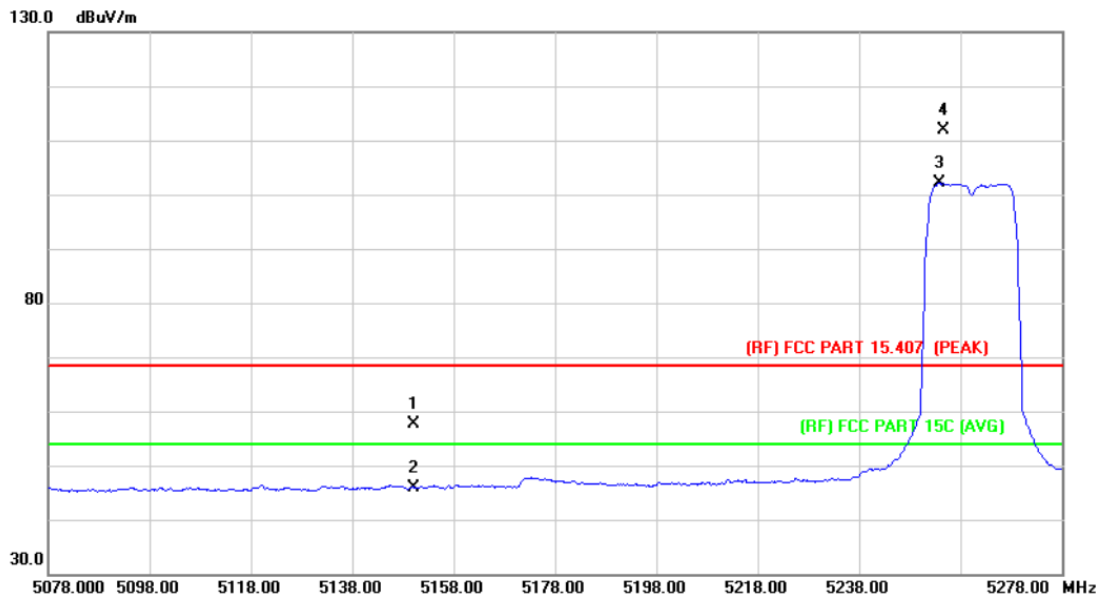

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.83	10.84	57.67	68.30	-10.63	peak
2		5150.000	35.10	10.84	45.94	54.00	-8.06	AVG
3	*	5253.800	91.23	10.85	102.08	Fundamental Frequency		AVG
4	X	5254.720	101.05	10.85	111.90	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5320 MHz (U-NII-2A)		
<b>Remark:</b>			

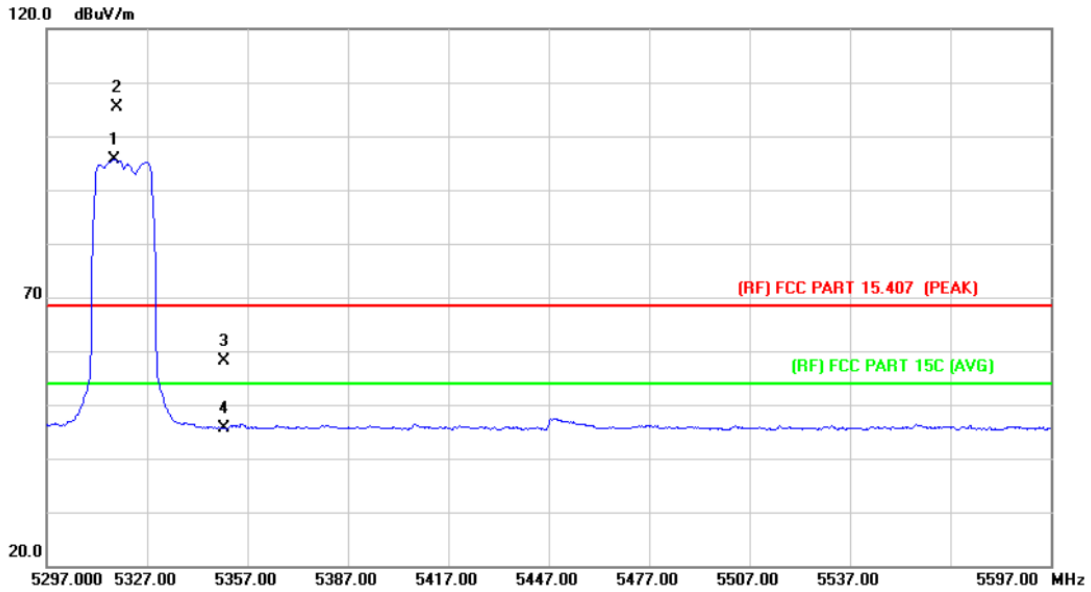


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5317.100	84.84	10.85	95.69	Fundamental Frequency		AVG
2	X	5318.130	94.64	10.85	105.49	Fundamental Frequency		peak
3		5350.000	47.20	10.86	58.06	68.30	-10.24	peak
4		5350.000	34.65	10.86	45.51	54.00	-8.49	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5320 MHz (U-NII-2A)		
<b>Remark:</b>			

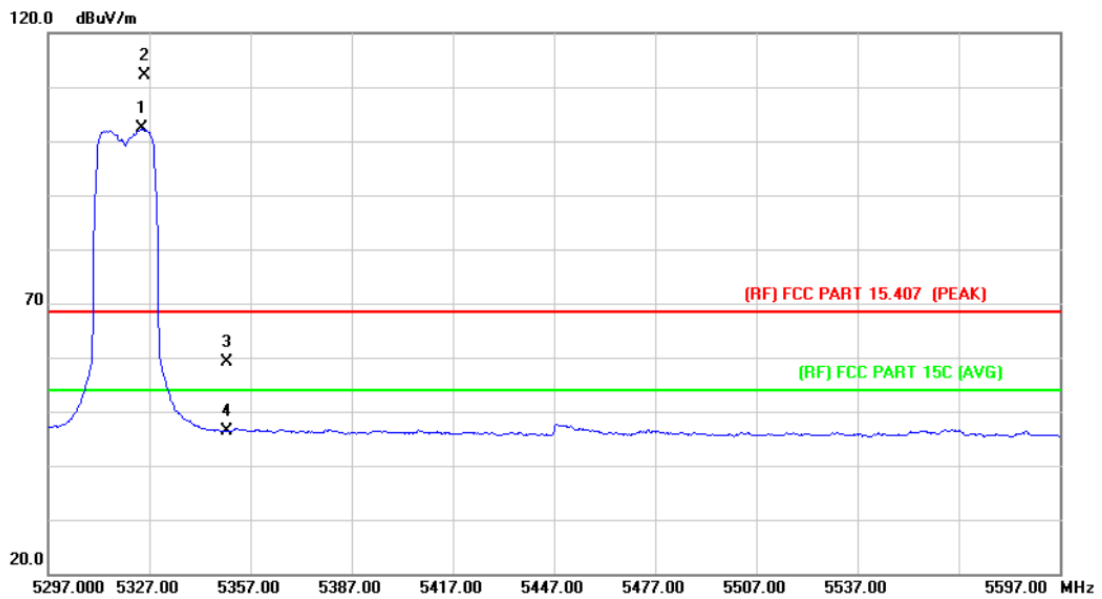

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5324.600	91.43	10.86	102.29	Fundamental Frequency		AVG
2	X	5325.620	101.19	10.86	112.05	Fundamental Frequency		peak
3		5350.000	48.29	10.86	59.15	68.30	-9.15	peak
4		5350.000	35.58	10.86	46.44	54.00	-7.56	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5260 MHz (U-NII-2A)		
<b>Remark:</b>			

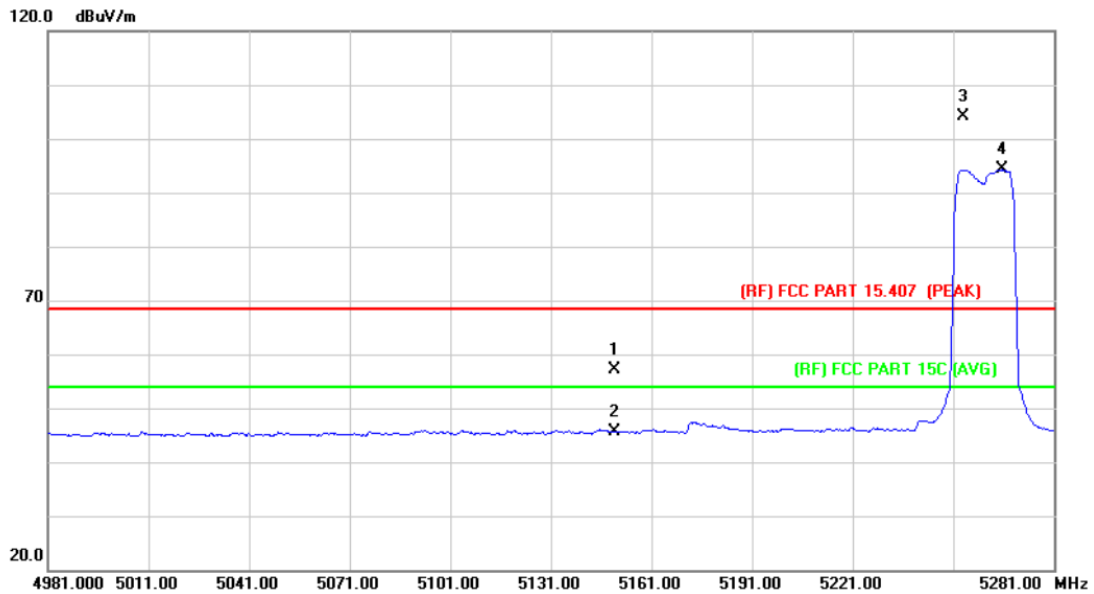

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	46.38	10.84	57.22	68.30	-11.08	peak
2		5150.000	34.79	10.84	45.63	54.00	-8.37	AVG
3	X	5254.180	93.40	10.85	104.25			Fundamental Frequency peak
4	*	5265.400	83.42	10.85	94.27			Fundamental Frequency AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5260 MHz (U-NII-2A)		
<b>Remark:</b>			

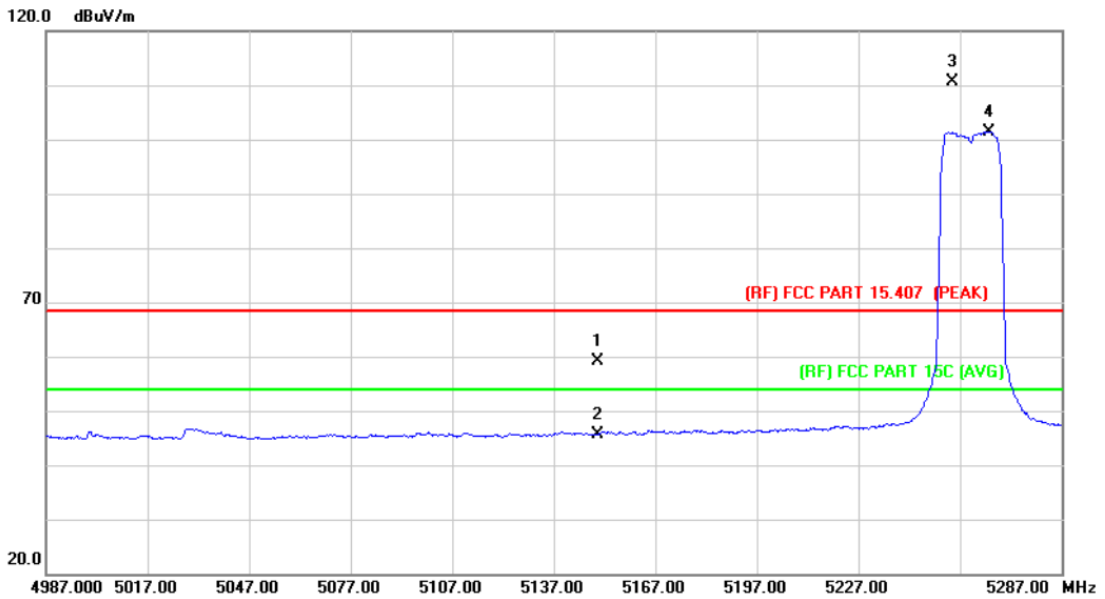


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	48.29	10.84	59.13	68.30	-9.17	peak
2		5150.000	34.84	10.84	45.68	54.00	-8.32	AVG
3	X	5254.780	99.84	10.85	110.69			peak
								Fundamental Frequency
4	*	5265.400	90.62	10.85	101.47			AVG
								Fundamental Frequency

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)		
<b>Remark:</b>			

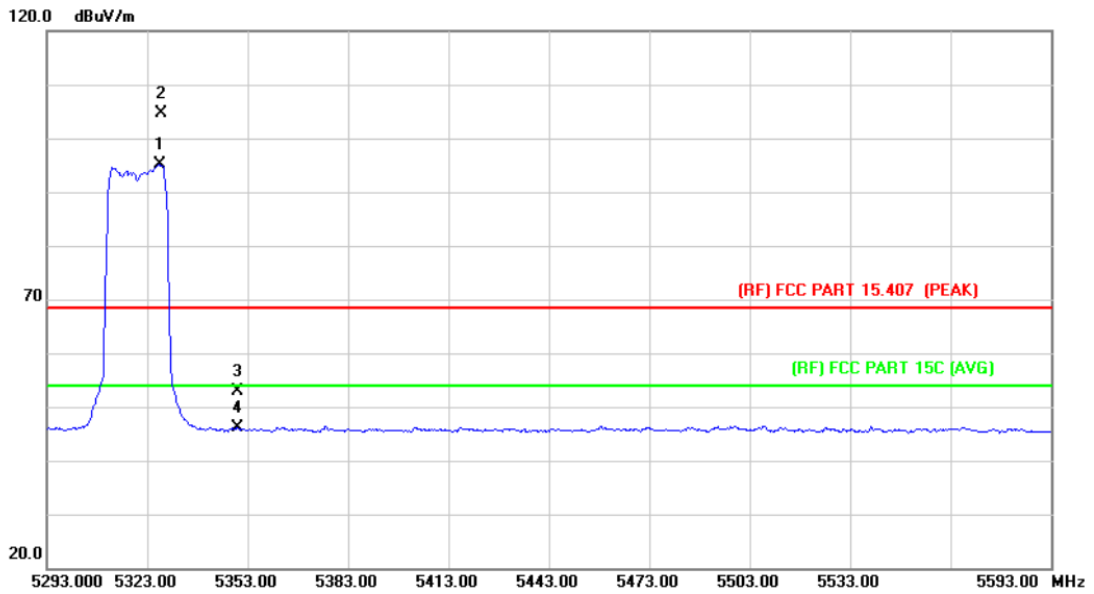

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5326.600	84.20	10.86	95.06	Fundamental Frequency		AVG
2	X	5327.320	93.74	10.86	104.60	Fundamental Frequency		peak
3		5350.000	41.95	10.86	52.81	68.30	-15.49	peak
4		5350.000	35.20	10.86	46.06	54.00	-7.94	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)		
<b>Remark:</b>			

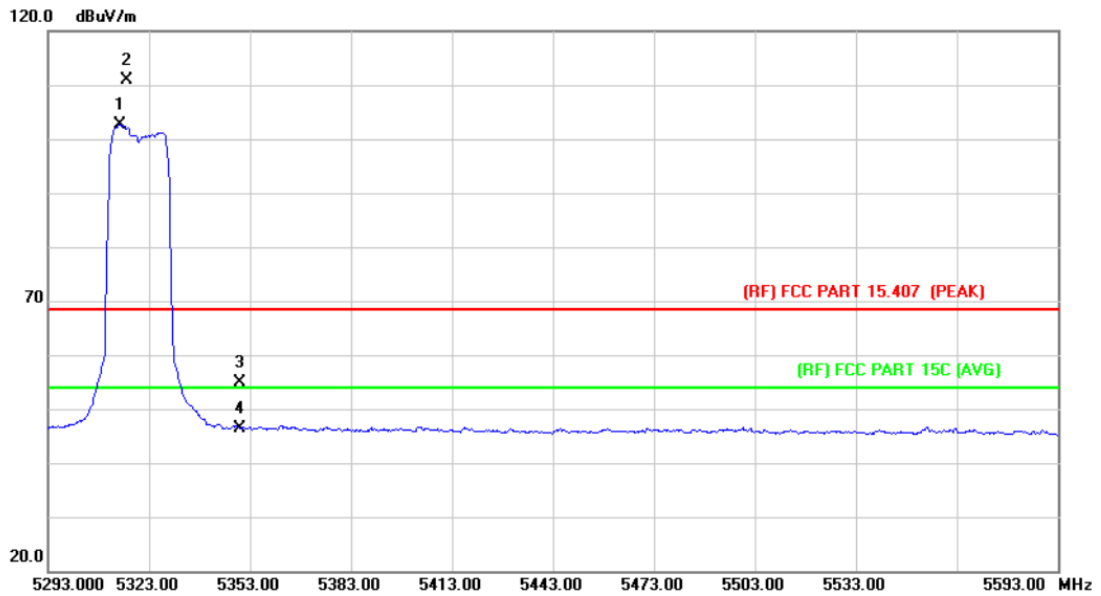

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5314.300	91.71	10.85	102.56	Fundamental Frequency		AVG
2	X	5316.530	100.07	10.85	110.92	Fundamental Frequency		peak
3		5350.000	44.11	10.86	54.97	68.30	-13.33	peak
4		5350.000	35.60	10.86	46.46	54.00	-7.54	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5260 MHz (U-NII-2A)		
<b>Remark:</b>			

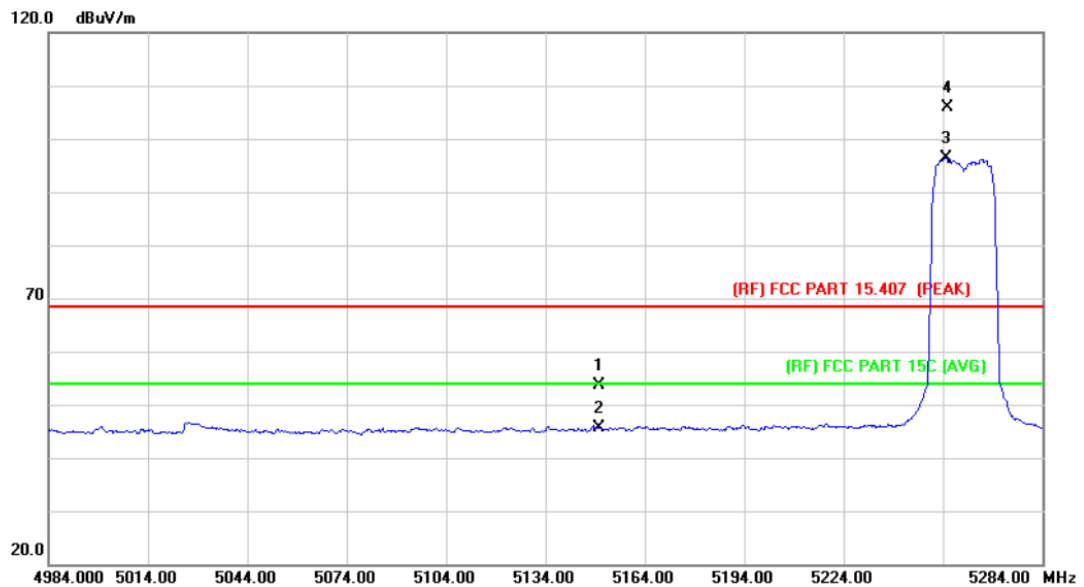


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	42.91	10.84	53.75	68.30	-14.55	peak
2		5150.000	34.75	10.84	45.59	54.00	-8.41	AVG
3	*	5254.900	85.53	10.85	96.38	Fundamental Frequency		AVG
4	X	5255.380	95.15	10.85	106.00	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor




Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

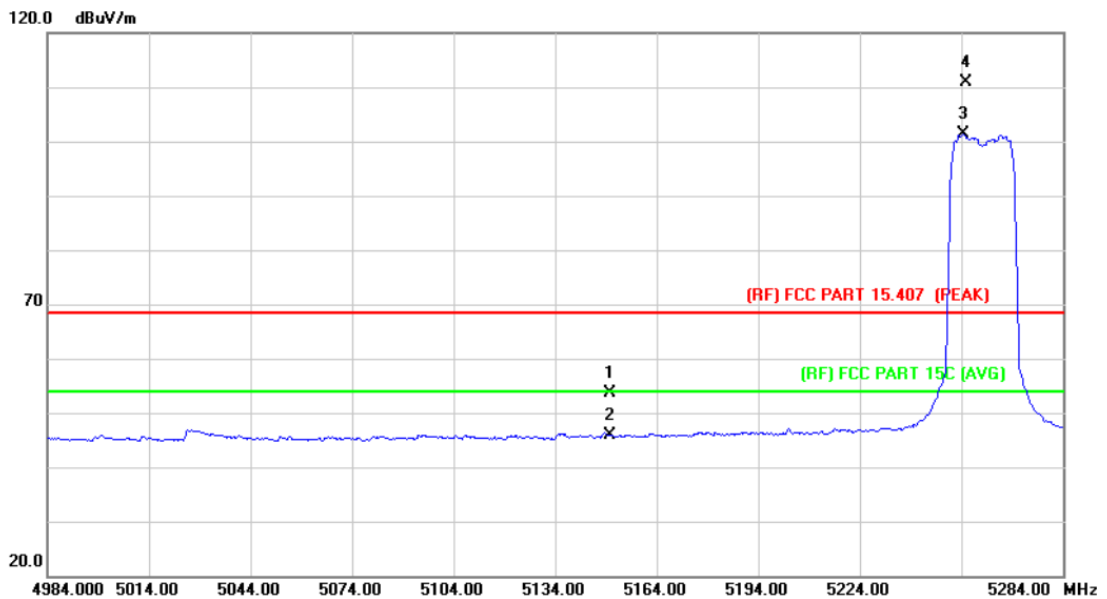

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	42.83	10.84	53.67	68.30	-14.63	peak
2		5150.000	35.07	10.84	45.91	54.00	-8.09	AVG
3	*	5254.600	90.45	10.85	101.30	Fundamental Frequency		AVG
4	X	5255.380	100.07	10.85	110.92	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

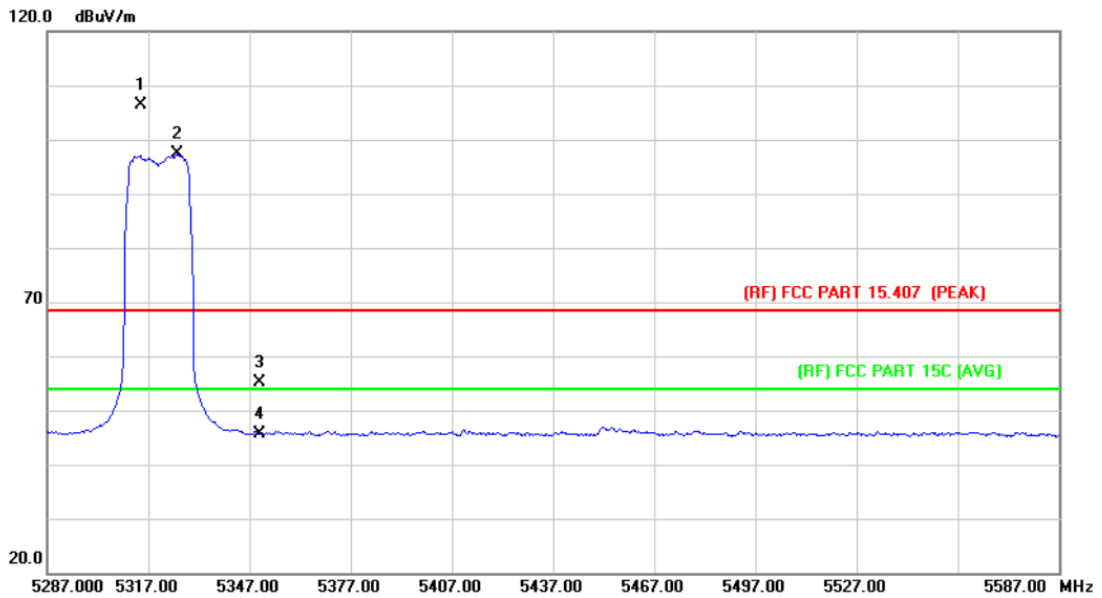

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5314.720	95.61	10.85	106.46	Fundamental Frequency		peak
2	*	5325.400	86.43	10.86	97.29	Fundamental Frequency		AVG
3		5350.000	44.19	10.86	55.05	68.30	-13.25	peak
4		5350.000	34.84	10.86	45.70	54.00	-8.30	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)		
<b>Remark:</b>			

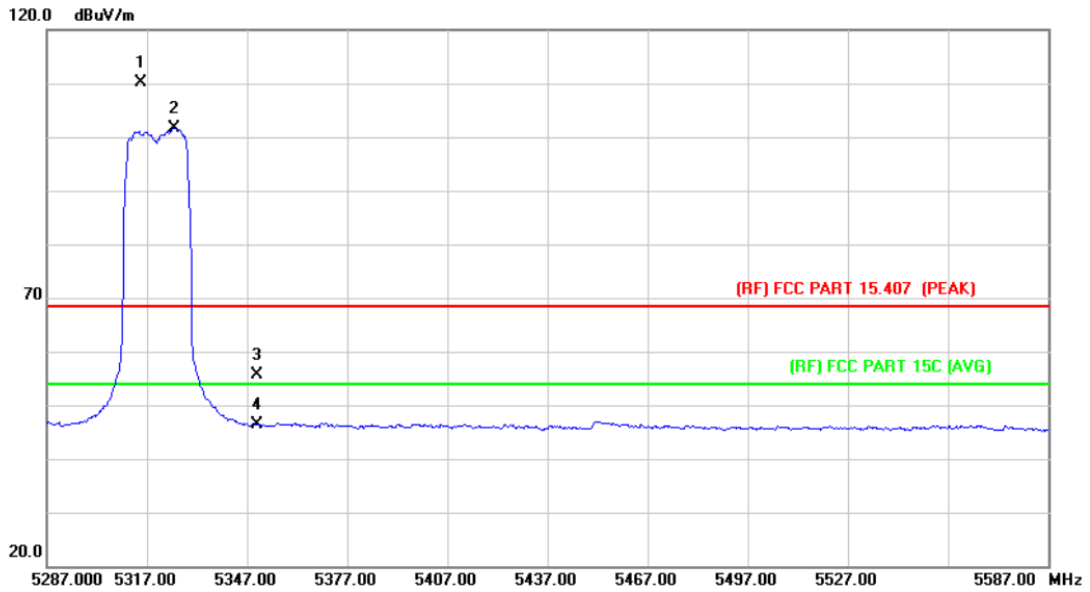


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5315.020	99.16	10.85	110.01	Fundamental Frequency		peak
2	*	5325.100	90.88	10.86	101.74	Fundamental Frequency		AVG
3		5350.000	44.81	10.86	55.67	68.30	-12.63	peak
4		5350.000	35.54	10.86	46.40	54.00	-7.60	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5270 MHz (U-NII-2A)		
<b>Remark:</b>			

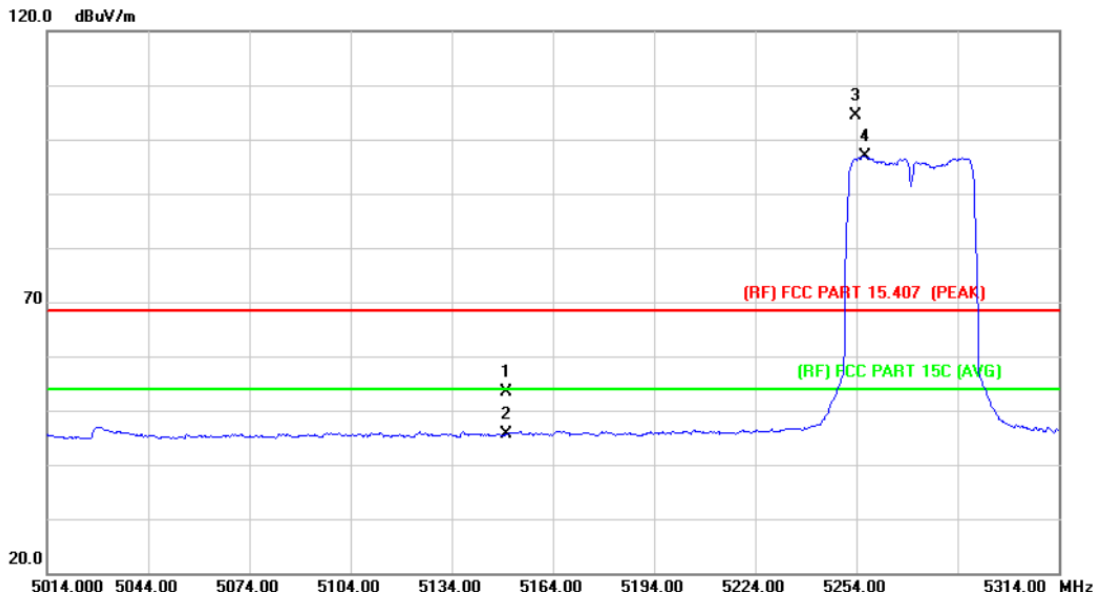

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.66	10.84	53.50	68.30	-14.80	peak
2		5150.000	34.74	10.84	45.58	54.00	-8.42	AVG
3	X	5253.610	93.63	10.85	104.48	Fundamental Frequency		peak
4	*	5256.400	85.97	10.85	96.82	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5270 MHz (U-NII-2A)		
<b>Remark:</b>			

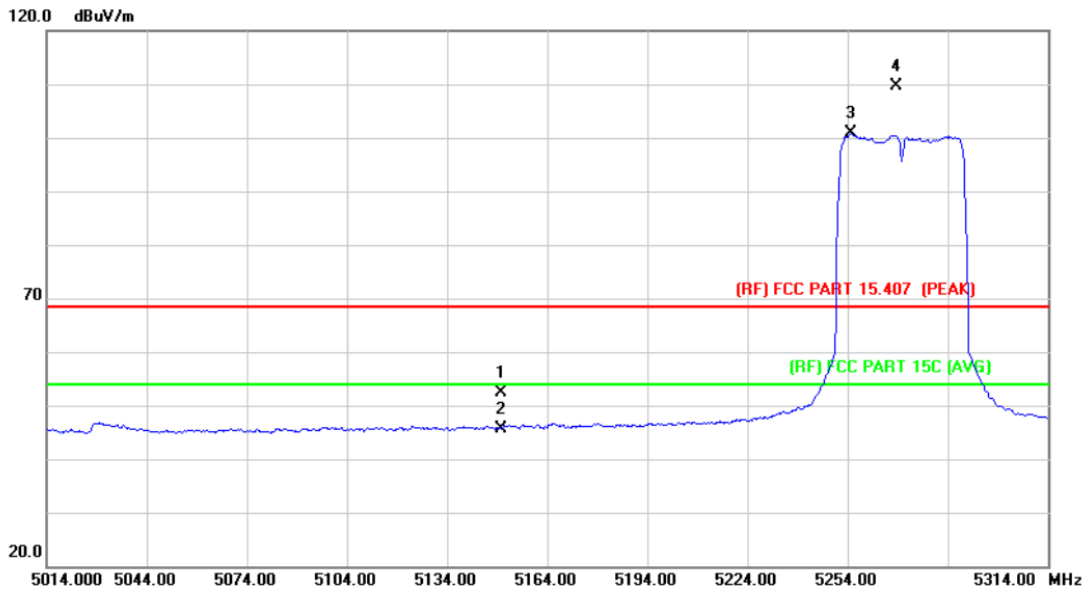

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	41.46	10.84	52.30	68.30	-16.00	peak
2		5150.000	34.88	10.84	45.72	54.00	-8.28	AVG
3	*	5254.900	89.95	10.85	100.80	Fundamental Frequency		AVG
4	X	5268.600	98.82	10.85	109.67	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)		
<b>Remark:</b>			

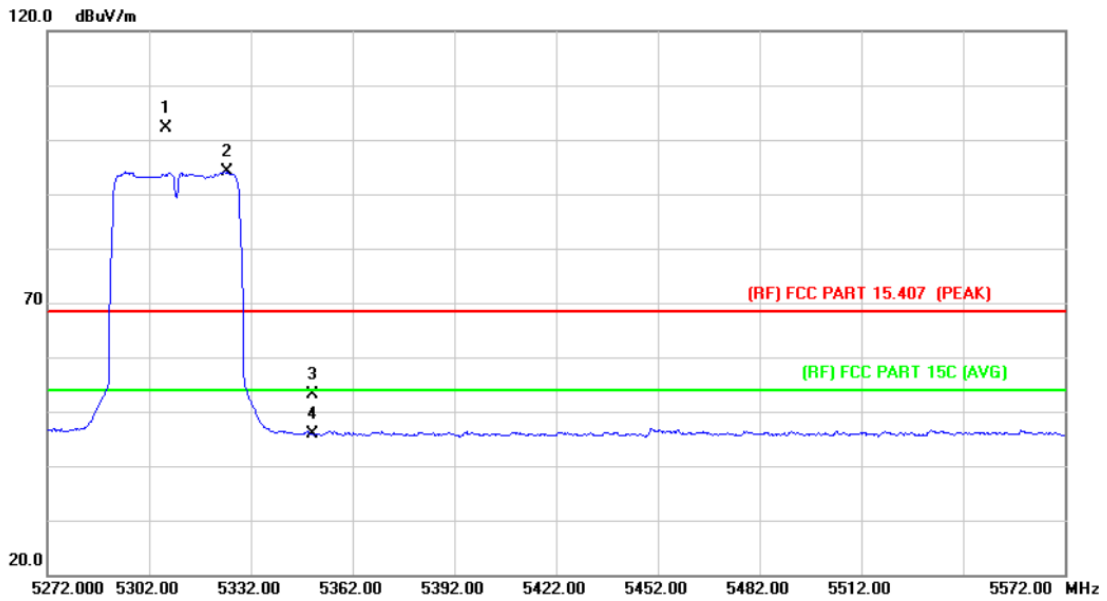


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5306.920	91.37	10.86	102.23	Fundamental Frequency		peak
2	*	5325.100	83.28	10.86	94.14	Fundamental Frequency		AVG
3		5350.000	42.32	10.86	53.18	68.30	-15.12	peak
4		5350.000	34.99	10.86	45.85	54.00	-8.15	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)		
<b>Remark:</b>			

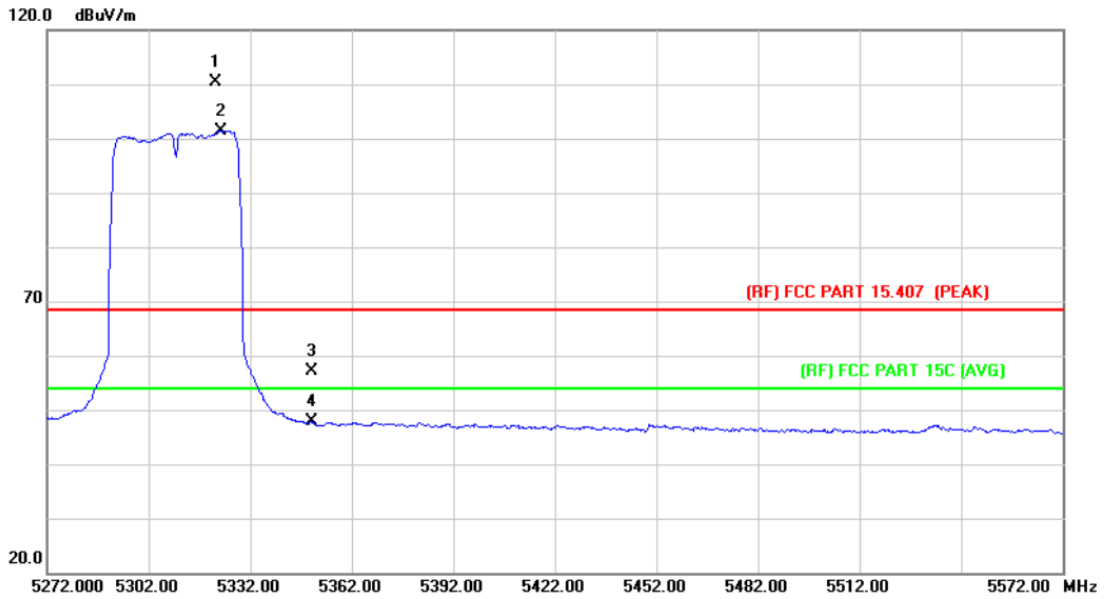

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5321.600	99.43	10.85	110.28	Fundamental Frequency		peak
2	*	5323.300	90.60	10.85	101.45	Fundamental Frequency		AVG
3		5350.000	46.25	10.86	57.11	68.30	-11.19	peak
4		5350.000	36.91	10.86	47.77	54.00	-6.23	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5270 MHz (U-NII-2A)		
<b>Remark:</b>			

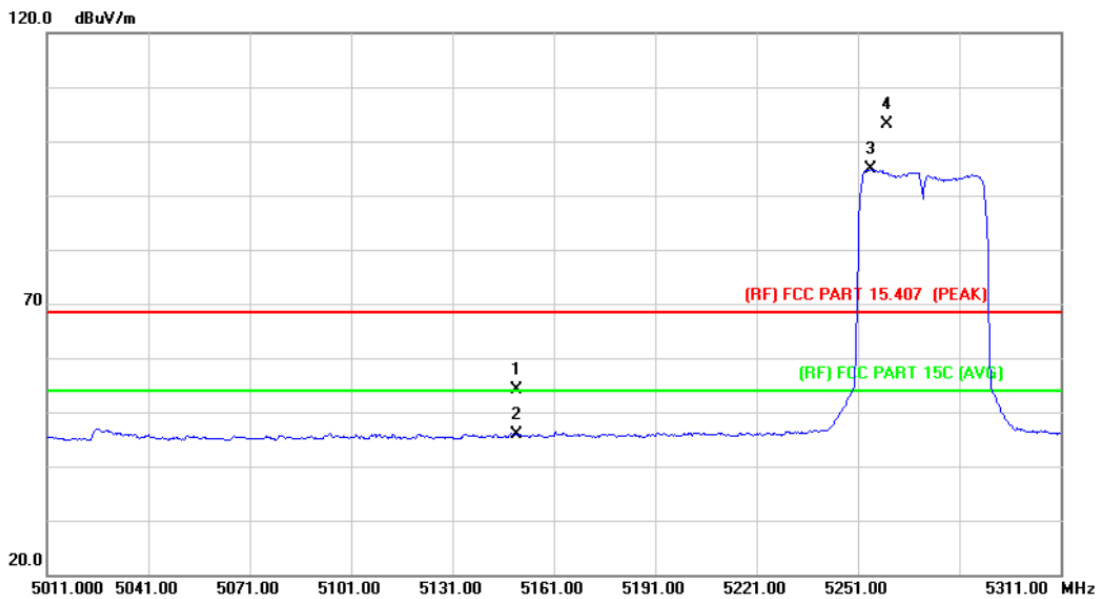

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	43.38	10.84	54.22	68.30	-14.08	peak
2		5150.000	34.99	10.84	45.83	54.00	-8.17	AVG
3	*	5254.600	84.07	10.85	94.92	Fundamental Frequency		AVG
4	X	5259.600	92.22	10.85	103.07	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

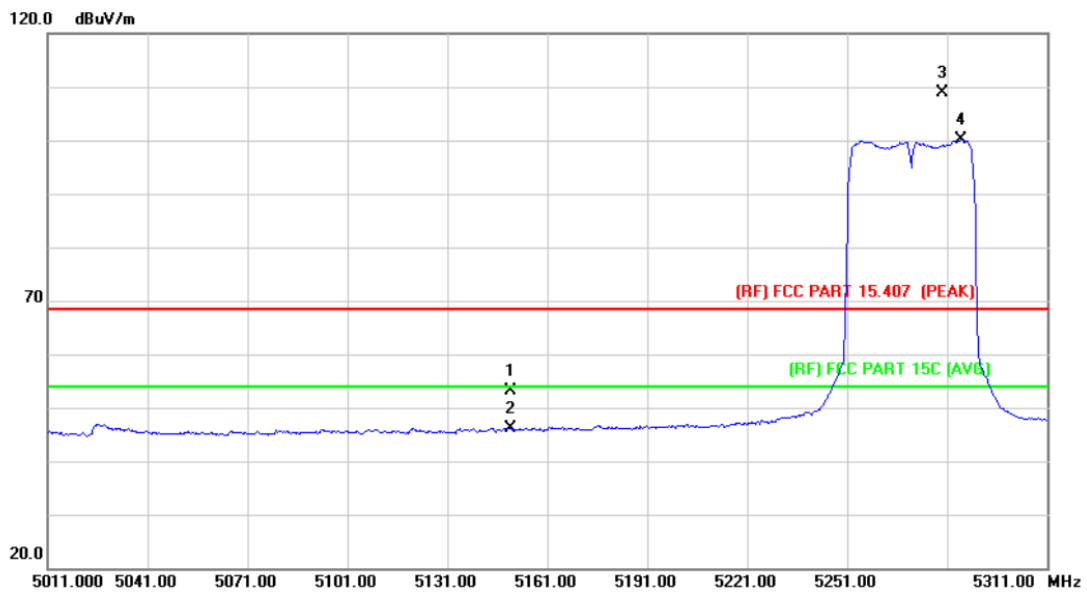


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	42.24	10.84	53.08	68.30	-15.22	peak
2		5150.000	35.36	10.84	46.20	54.00	-7.80	AVG
3	X	5279.680	97.99	10.85	108.84	Fundamental Frequency		peak
4	*	5285.200	89.21	10.86	100.07	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
<b>Remark:</b>			

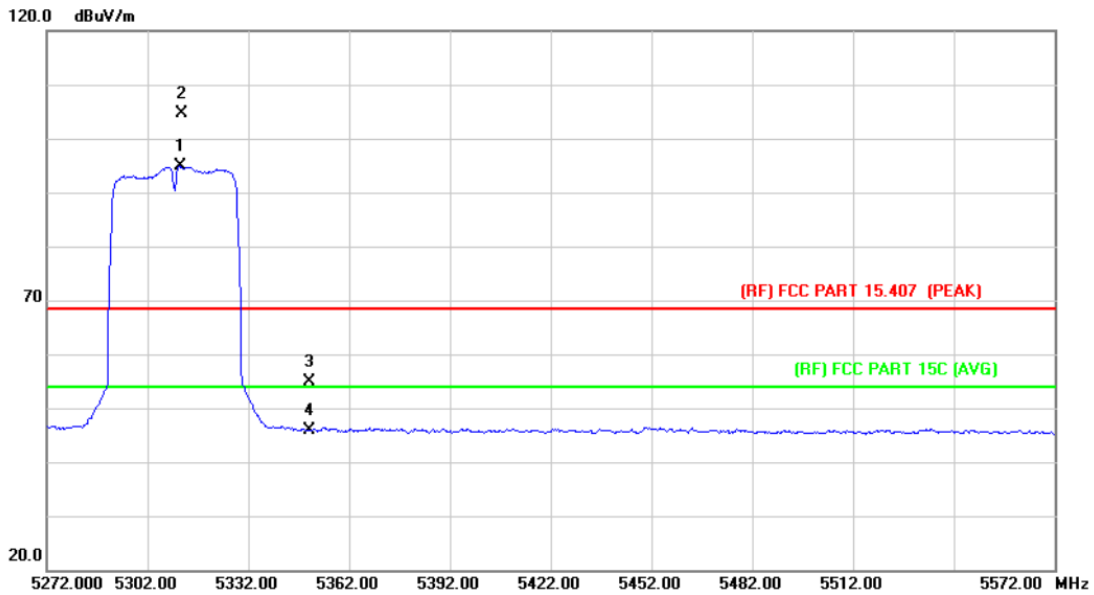

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	5311.600	83.96	10.86	94.82	Fundamental Frequency	!	AVG
2	X	5312.010	93.65	10.86	104.51	Fundamental Frequency		peak
3		5350.000	44.11	10.86	54.97	68.30	-13.33	peak
4		5350.000	34.92	10.86	45.78	54.00	-8.22	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
<b>Remark:</b>			

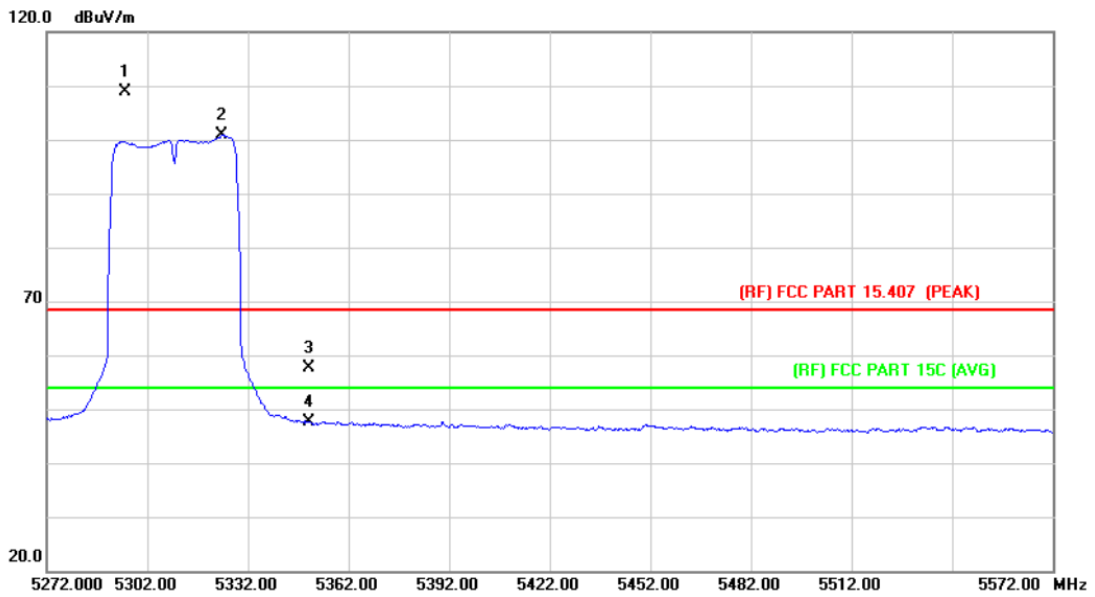


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5295.230	98.06	10.85	108.91			peak
2	*	5324.200	89.96	10.86	100.82			AVG
3		5350.000	46.78	10.86	57.64	68.30	-10.66	peak
4		5350.000	36.89	10.86	47.75	54.00	-6.25	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5290 MHz(U-NII-2A)		
<b>Remark:</b>			

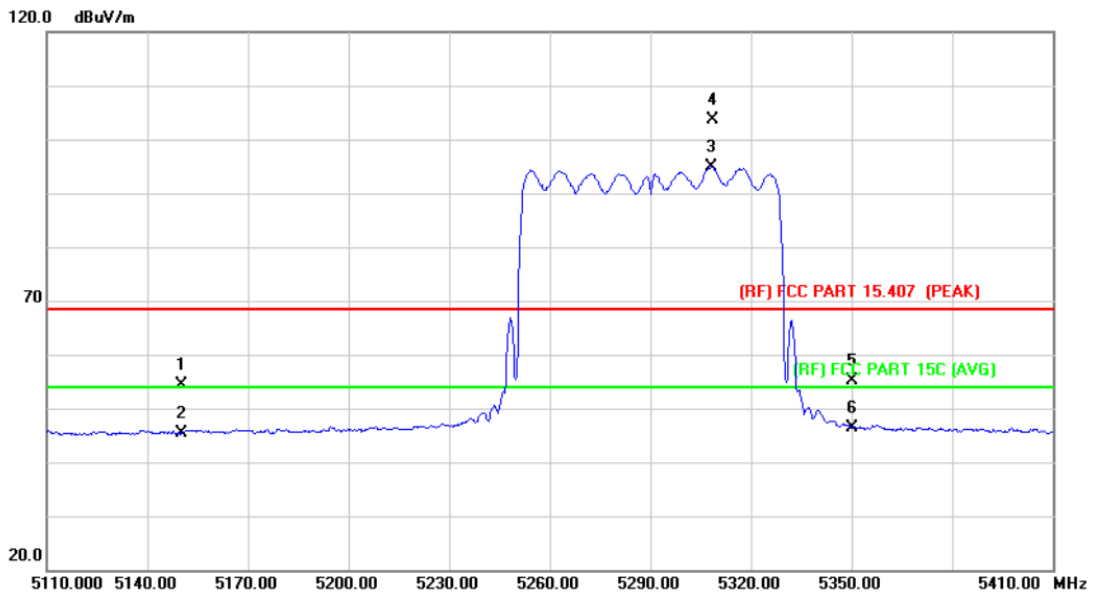


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	43.46	10.84	54.30	68.30	-14.00	peak
2		5150.000	34.53	10.84	45.37	54.00	-8.63	AVG
3	*	5308.300	84.14	10.86	95.00	Fundamental Frequency		AVG
4	X	5308.550	92.73	10.86	103.59	Fundamental Frequency		peak
5		5350.000	44.25	10.86	55.11	68.30	-13.19	peak
6		5350.000	35.56	10.86	46.42	54.00	-7.58	AVG

Emission Level= Read Level+ Correct Factor




Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)		
Remark:			

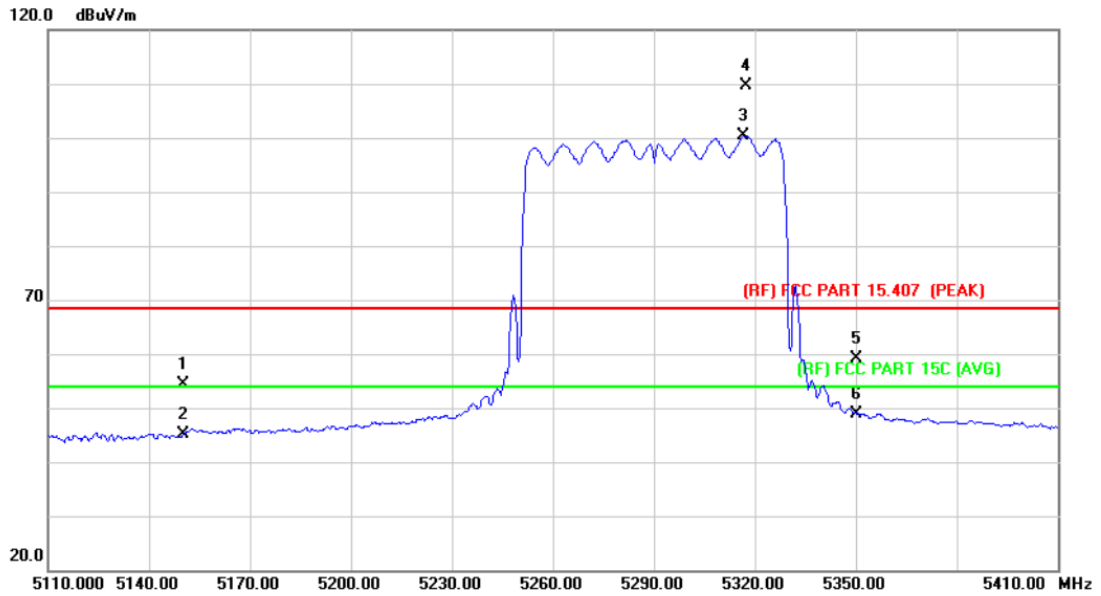

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	43.51	10.84	54.35	68.30	-13.95	peak
2		5150.000	34.39	10.84	45.23	54.00	-8.77	AVG
3	*	5316.400	89.59	10.85	100.44	Fundamental Frequency		AVG
4	X	5317.540	98.82	10.85	109.67	Fundamental Frequency		peak
5		5350.000	48.28	10.86	59.14	68.30	-9.16	peak
6		5350.000	38.08	10.86	48.94	54.00	-5.06	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

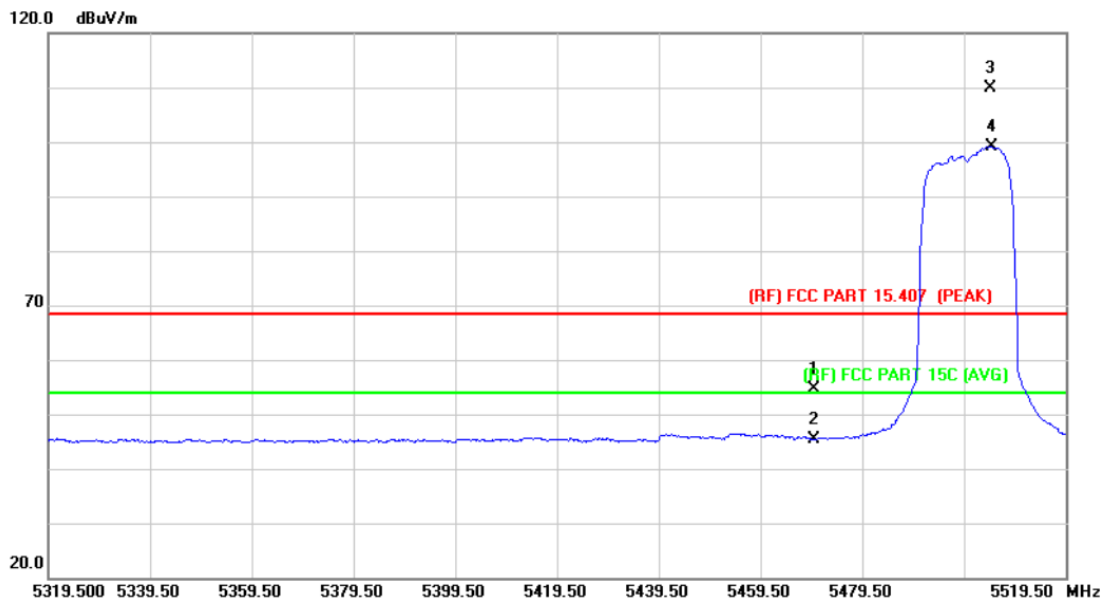

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	41.35	13.31	54.66	68.30	-13.64	peak
2		5470.000	32.10	13.31	45.41	54.00	-8.59	AVG
3	X	5504.610	96.64	13.30	109.94			Fundamental Frequency peak
4	*	5504.900	85.81	13.30	99.11			Fundamental Frequency AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

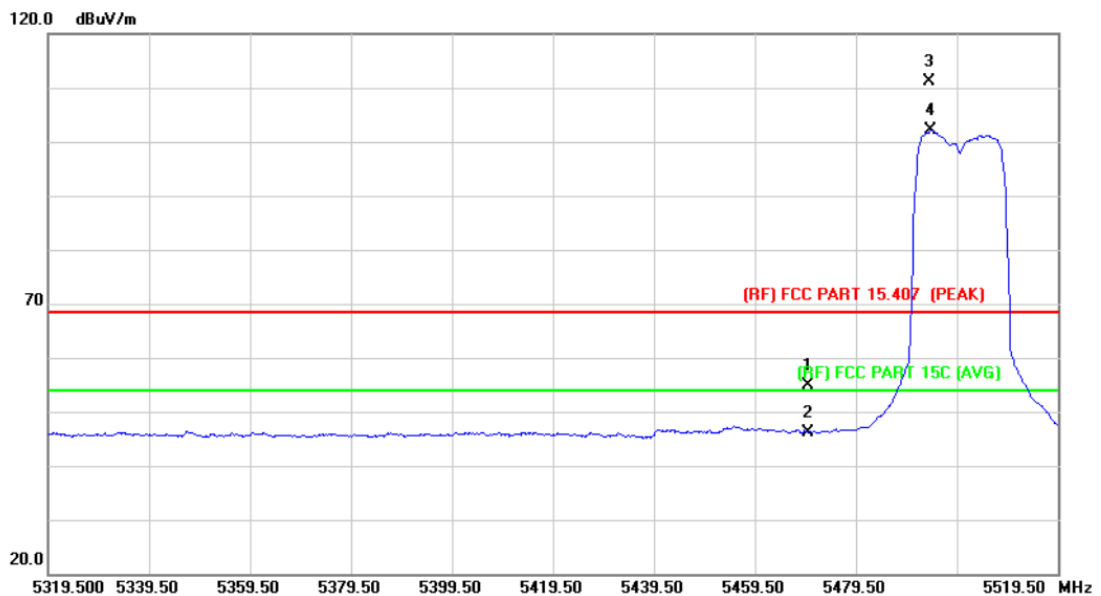


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	41.64	13.31	54.95	68.30	-13.35	peak
2		5470.000	32.88	13.31	46.19	54.00	-7.81	AVG
3	X	5494.030	97.83	13.30	111.13	Fundamental Frequency		peak
4	*	5494.300	88.76	13.29	102.05	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5700 MHz (U-NII-2C)		
<b>Remark:</b>			

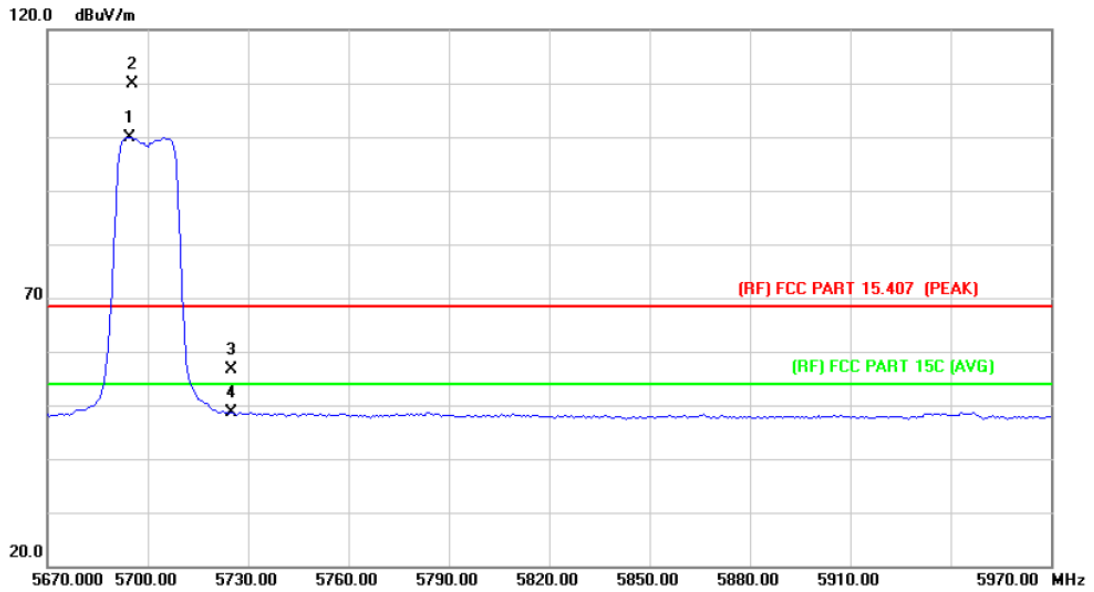

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	5694.600	86.05	13.81	99.86	Fundamental Frequency		AVG
2	X	5695.400	96.06	13.81	109.87	Fundamental Frequency		peak
3		5725.000	42.78	13.89	56.67	68.30	-11.63	peak
4		5725.000	34.77	13.89	48.66	54.00	-5.34	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5700 MHz (U-NII-2C)		
<b>Remark:</b>			

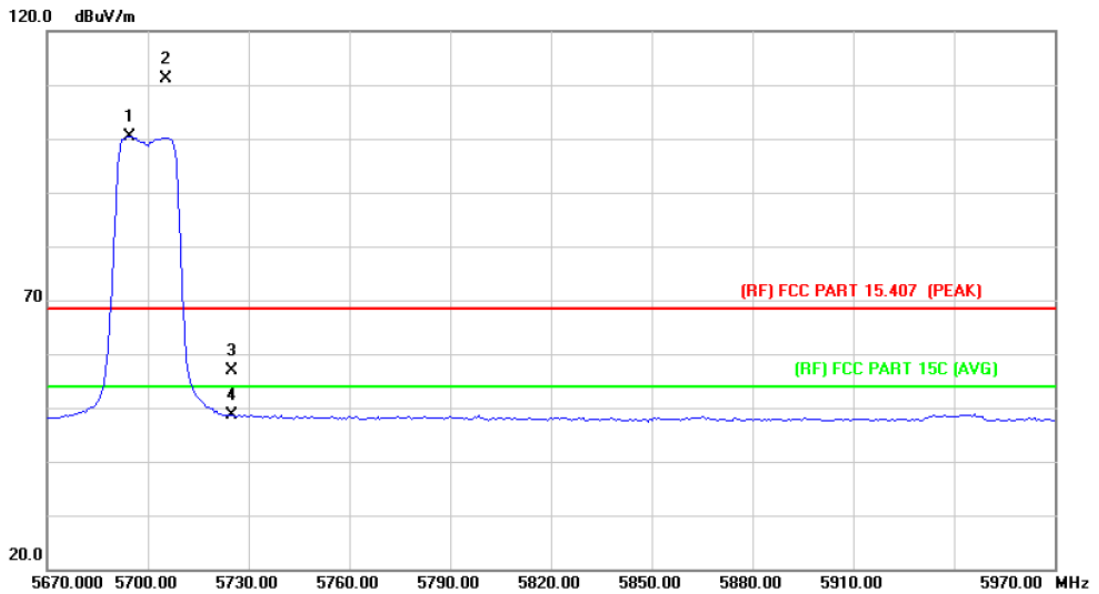


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5694.600	86.52	13.81	100.33	Fundamental Frequency		AVG
2	X	5705.400	97.41	13.84	111.25	Fundamental Frequency		peak
3		5725.000	43.00	13.89	56.89	68.30	-11.41	peak
4		5725.000	34.65	13.89	48.54	54.00	-5.46	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
<b>Remark:</b>			

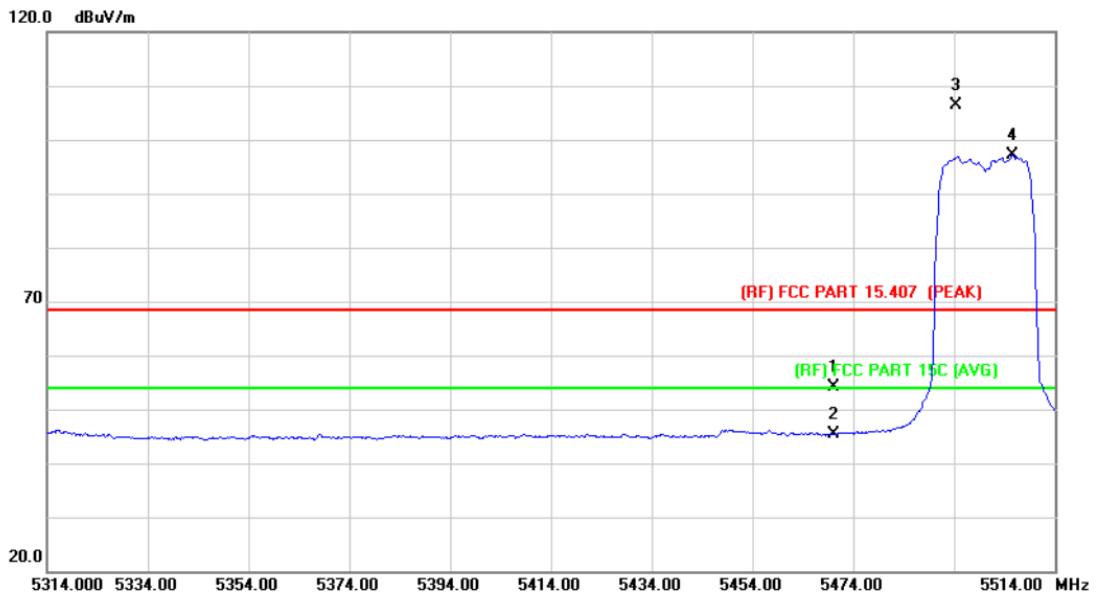


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5470.000	40.70	13.31	54.01	68.30	-14.29	peak
2		5470.000	31.99	13.31	45.30	54.00	-8.70	AVG
3	X	5494.320	93.10	13.29	106.39	Fundamental Frequency		peak
4	*	5505.600	83.78	13.30	97.08	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
<b>Remark:</b>			

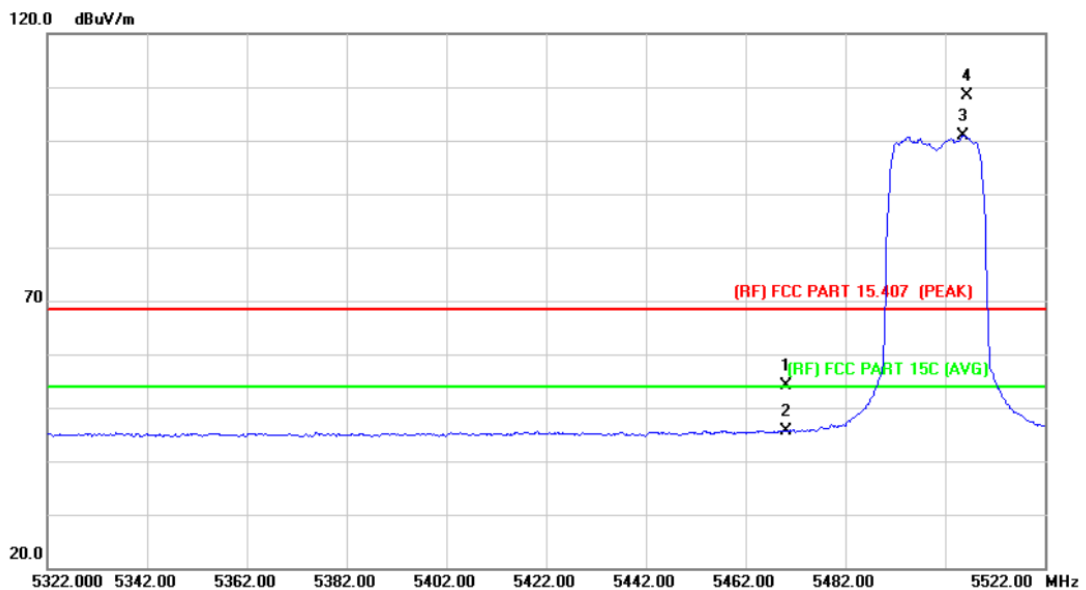

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	40.88	13.31	54.19	68.30	-14.11	peak
2		5470.000	32.38	13.31	45.69	54.00	-8.31	AVG
3	*	5505.600	87.59	13.30	100.89	Fundamental Frequency		AVG
4	X	5506.320	95.13	13.30	108.43	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
<b>Remark:</b>			

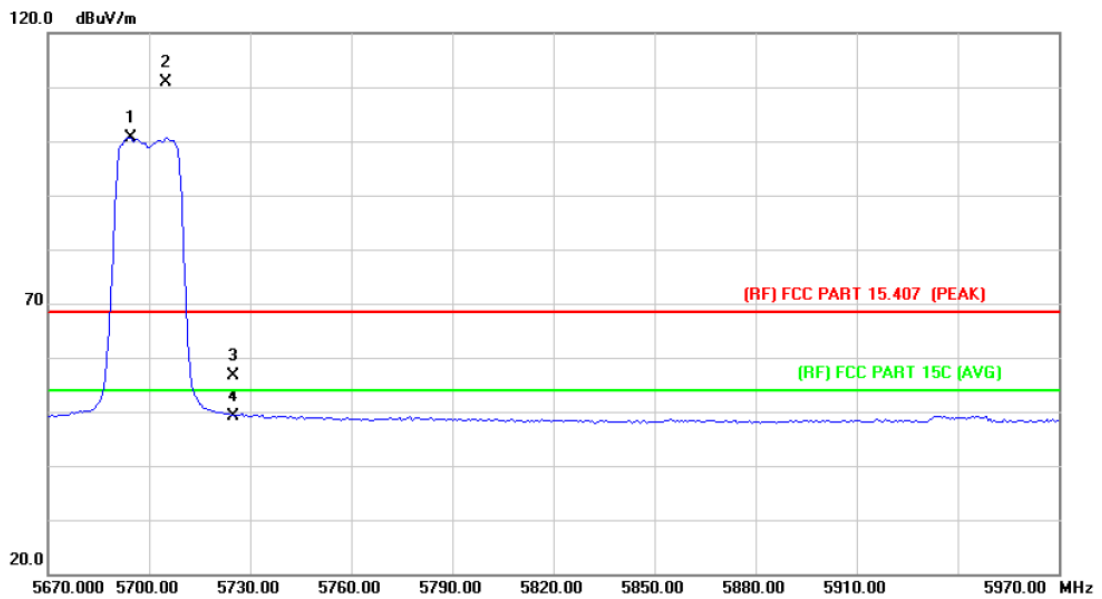


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5694.600	86.89	13.81	100.70	Fundamental Frequency		AVG
2	X	5704.800	97.01	13.84	110.85	Fundamental Frequency		peak
3		5725.000	42.65	13.89	56.54	68.30	-11.76	peak
4		5725.000	35.27	13.89	49.16	54.00	-4.84	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
<b>Remark:</b>			

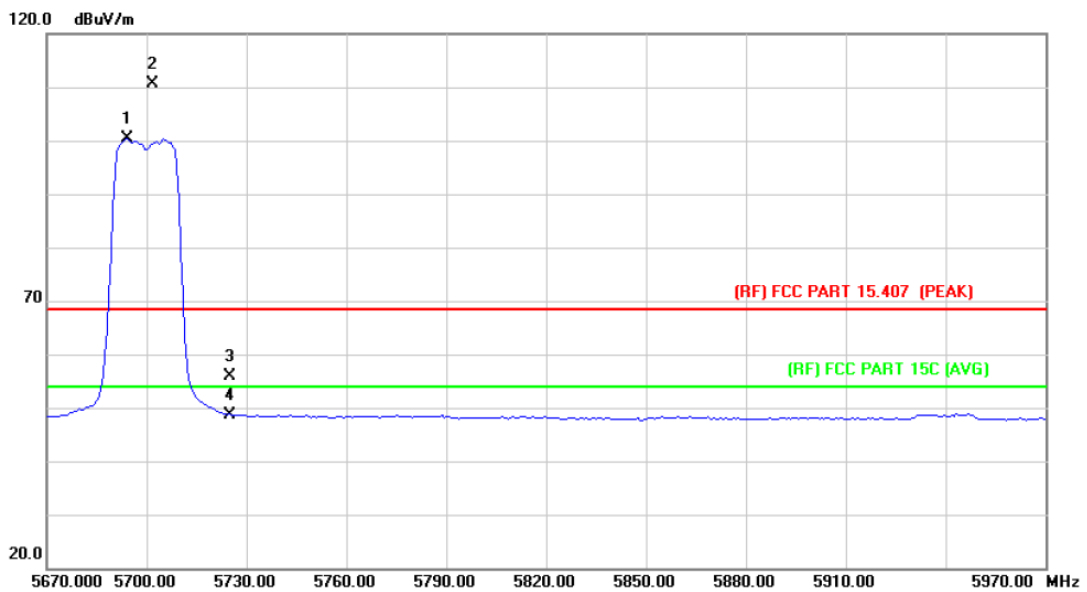


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	5694.000	86.47	13.81	100.28	Fundamental Frequency		AVG
2	X	5701.800	96.74	13.83	110.57	Fundamental Frequency		peak
3		5725.000	42.09	13.89	55.98	68.30	-12.32	peak
4		5725.000	34.85	13.89	48.74	54.00	-5.26	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
<b>Remark:</b>			

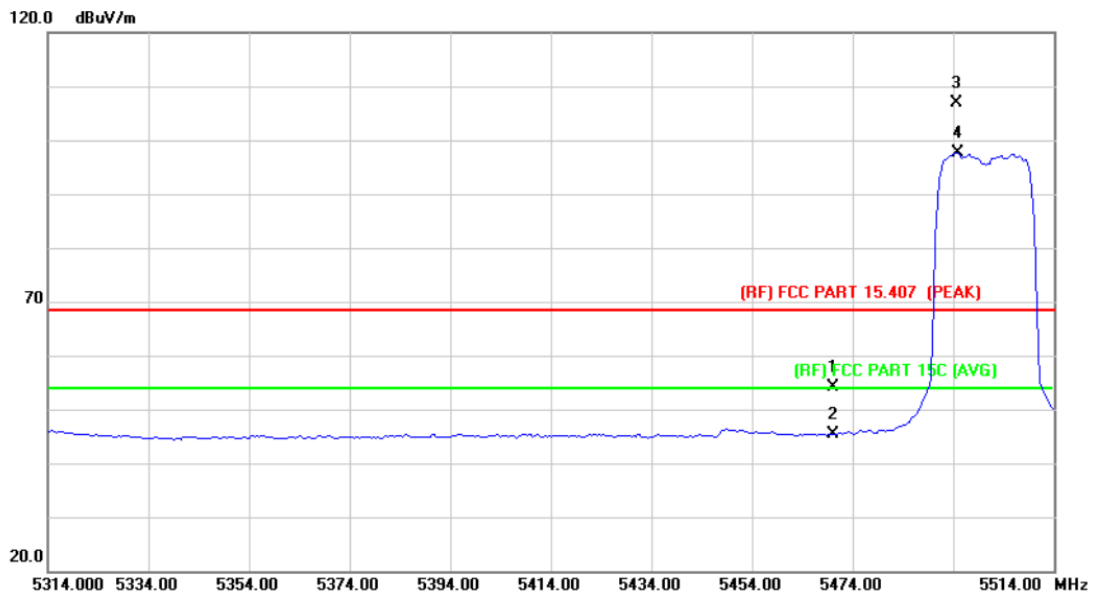

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5470.000	40.72	13.31	54.03	68.30	-14.27	peak
2		5470.000	31.97	13.31	45.28	54.00	-8.72	AVG
3	X	5494.720	93.65	13.29	106.94	Fundamental Frequency		peak
4	*	5494.800	84.36	13.29	97.65	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

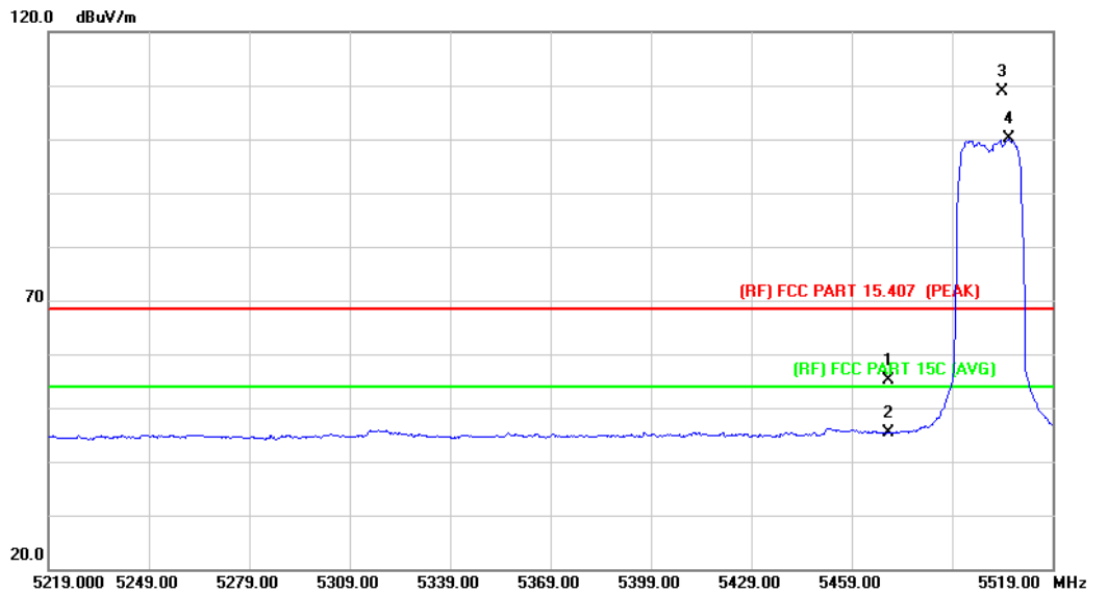

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5470.000	41.77	13.31	55.08	68.30	-13.22	peak
2		5470.000	32.00	13.31	45.31	54.00	-8.69	AVG
3	X	5504.160	95.60	13.30	108.90			Fundamental Frequency peak
4	*	5505.800	86.83	13.30	100.13			Fundamental Frequency AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
<b>Remark:</b>			

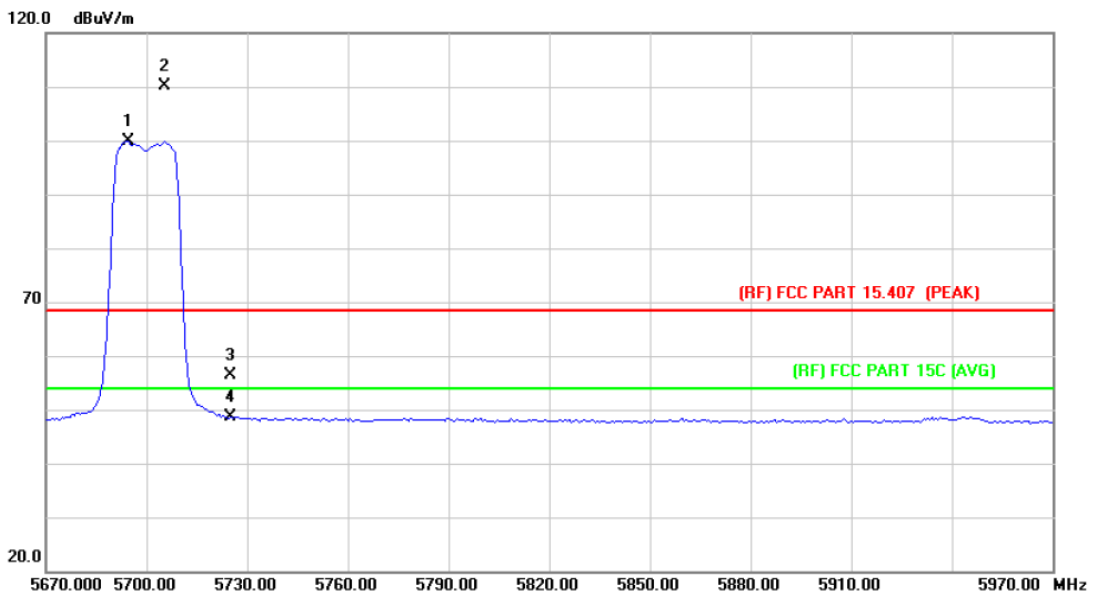


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5694.600	86.02	13.81	99.83	Fundamental Frequency		AVG
2	X	5705.400	96.40	13.84	110.24	Fundamental Frequency		peak
3		5725.000	42.42	13.89	56.31	68.30	-11.99	peak
4		5725.000	34.67	13.89	48.56	54.00	-5.44	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
<b>Remark:</b>			

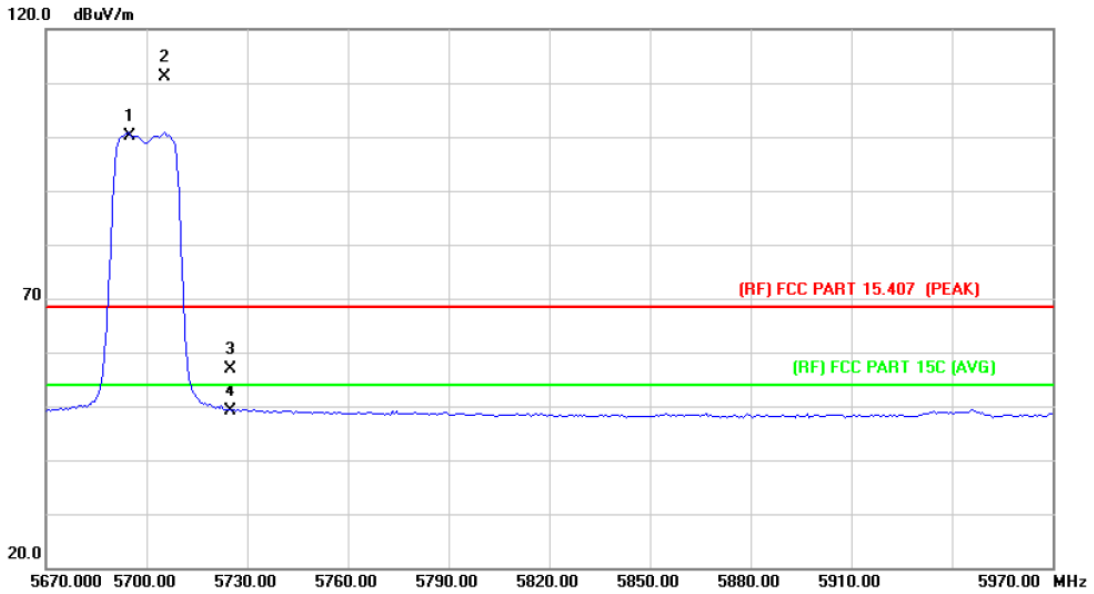

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5695.200	86.26	13.81	100.07	Fundamental Frequency		peak
2	*	5705.400	97.39	13.84	111.23	Fundamental Frequency		AVG
3		5725.000	42.93	13.89	56.82	68.30	-11.48	peak
4		5725.000	35.33	13.89	49.22	54.00	-4.78	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
<b>Remark:</b>			

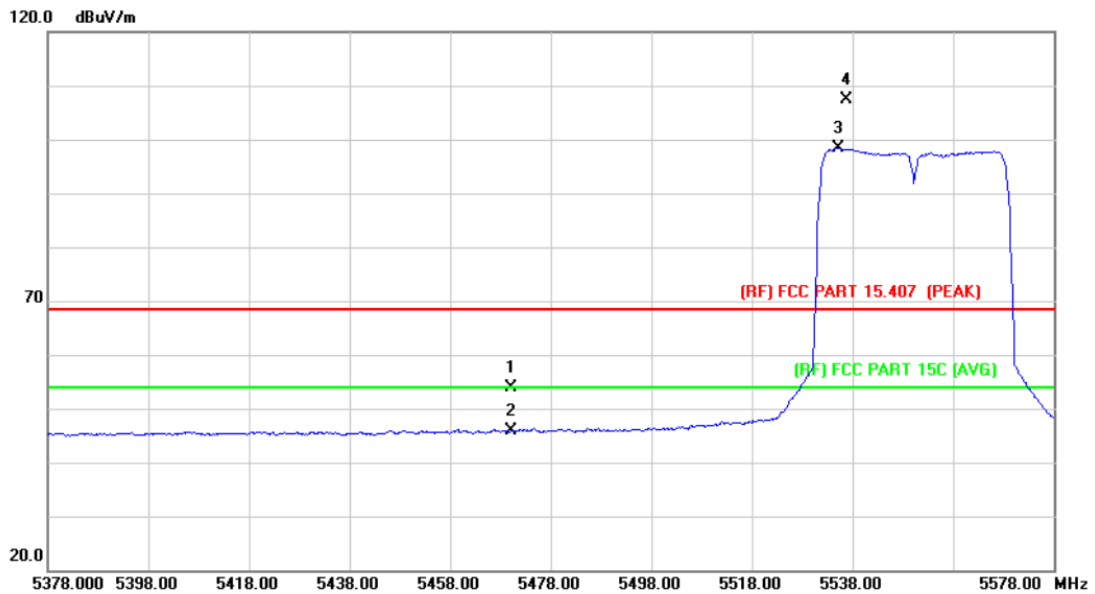

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	40.52	13.31	53.83	68.30	-14.47	peak
2		5470.000	32.53	13.31	45.84	54.00	-8.16	AVG
3	*	5535.200	84.96	13.38	98.34	Fundamental Frequency		AVG
4	X	5536.740	94.10	13.39	107.49	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
<b>Remark:</b>			

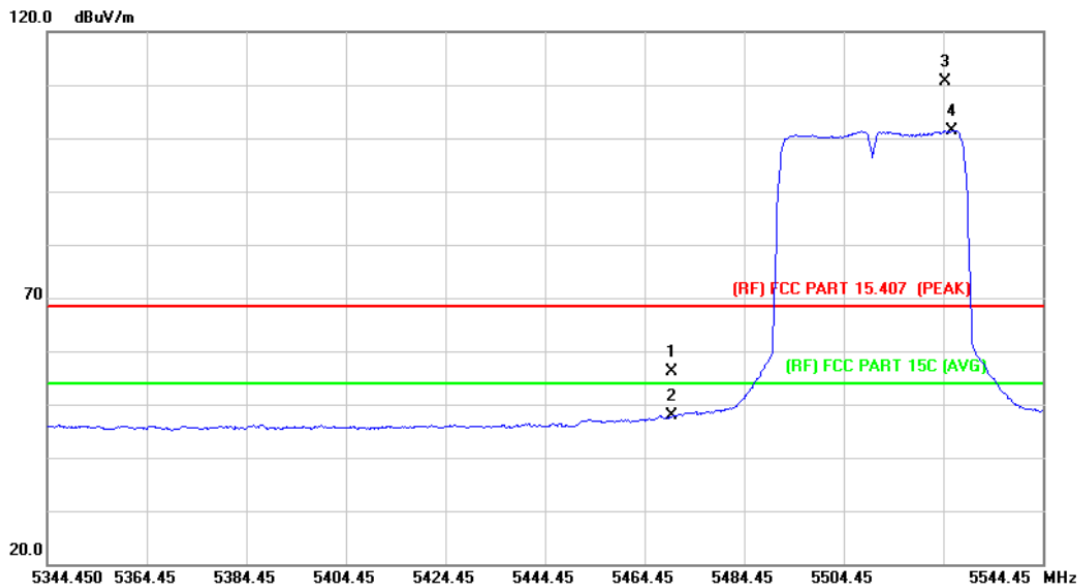


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	42.77	13.31	56.08	68.30	-12.22	peak
2		5470.000	34.56	13.31	47.87	54.00	-6.13	AVG
3	X	5524.770	97.23	13.35	110.58	Fundamental Frequency		peak
4	*	5526.050	88.05	13.36	101.41	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
<b>Remark:</b>			

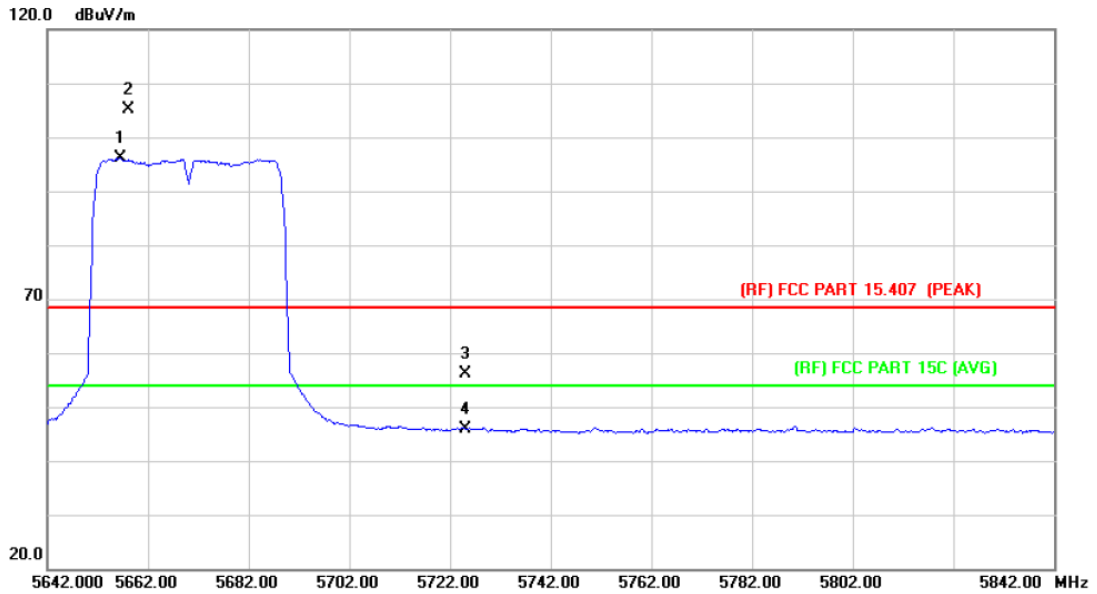

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5656.400	82.48	13.70	96.18	Fundamental Frequency		AVG
2	X	5658.080	91.36	13.71	105.07	Fundamental Frequency		peak
3		5725.000	42.36	13.89	56.25	68.30	-12.05	peak
4		5725.000	31.94	13.89	45.83	54.00	-8.17	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
<b>Remark:</b>			

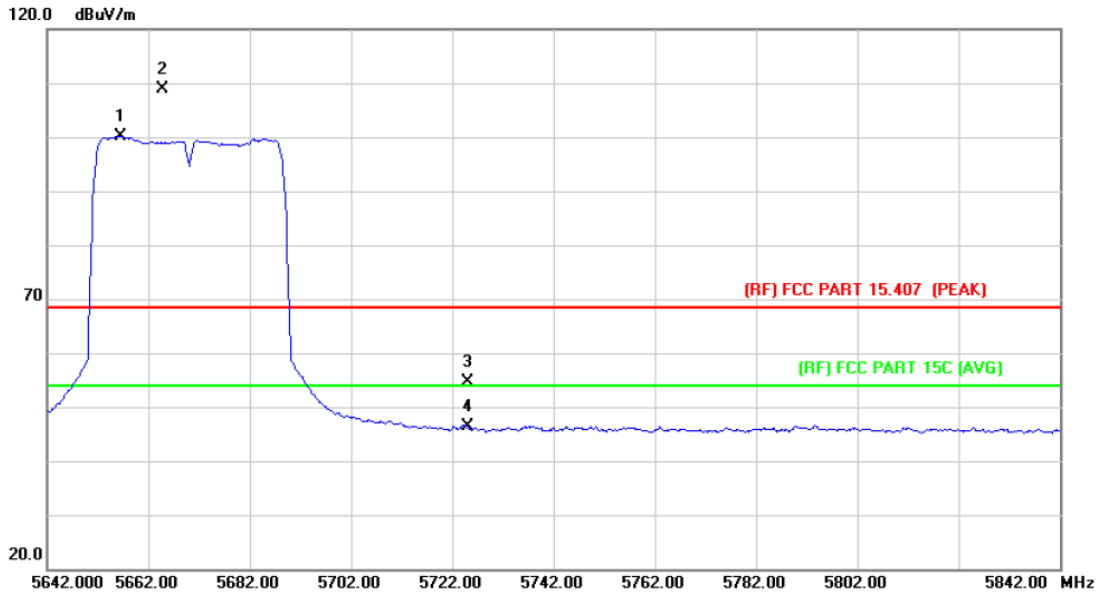


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5656.600	86.42	13.70	100.12	Fundamental Frequency		AVG
2	X	5664.880	95.18	13.74	108.92	Fundamental Frequency		peak
3		5725.000	40.71	13.89	54.60	68.30	-13.70	peak
4		5725.000	32.38	13.89	46.27	54.00	-7.73	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
<b>Remark:</b>			

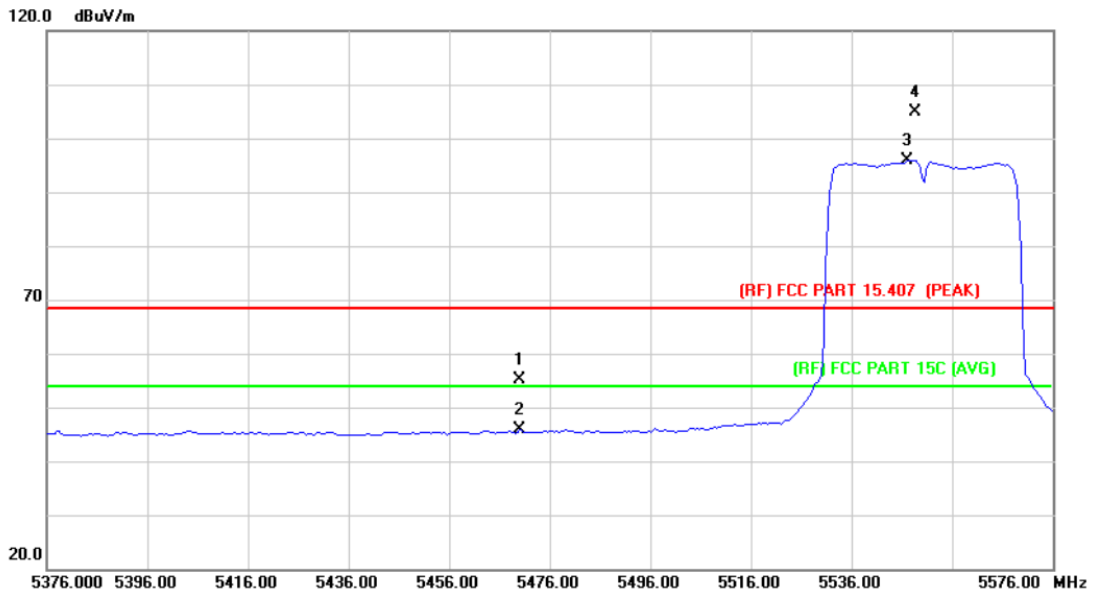


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	41.80	13.31	55.11	68.30	-13.19	peak
2		5470.000	32.48	13.31	45.79	54.00	-8.21	AVG
3	*	5547.200	82.42	13.41	95.83	Fundamental Frequency		AVG
4	X	5548.650	91.53	13.42	104.95	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
<b>Remark:</b>			

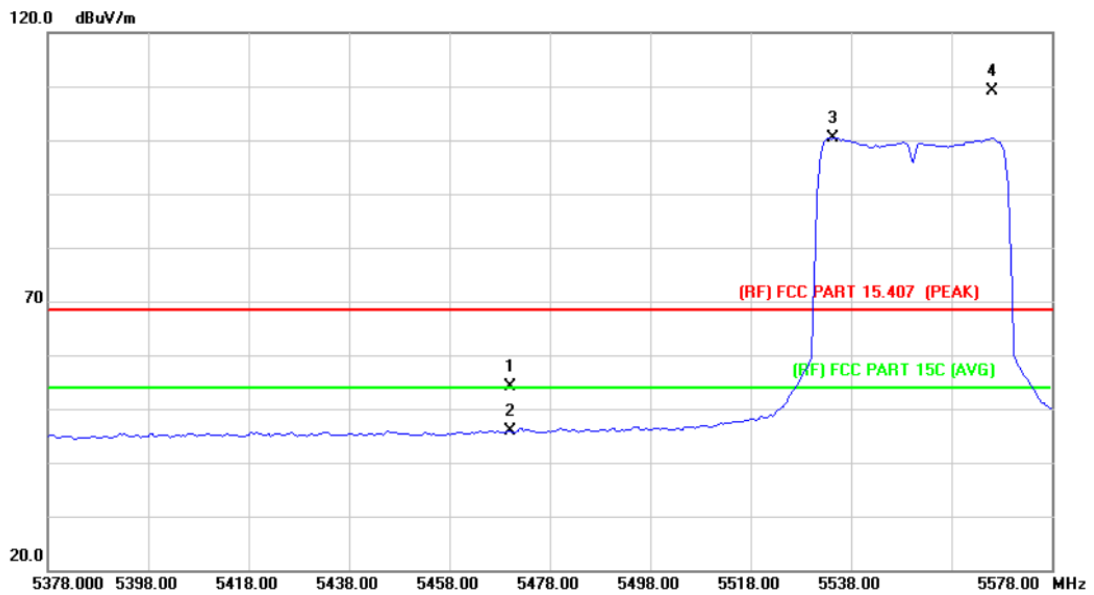

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	40.87	13.31	54.18	68.30	-14.12	peak
2		5470.000	32.54	13.31	45.85	54.00	-8.15	AVG
3	*	5534.400	86.94	13.38	100.32	Fundamental Frequency		AVG
4	X	5566.220	95.76	13.47	109.23	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
<b>Remark:</b>			

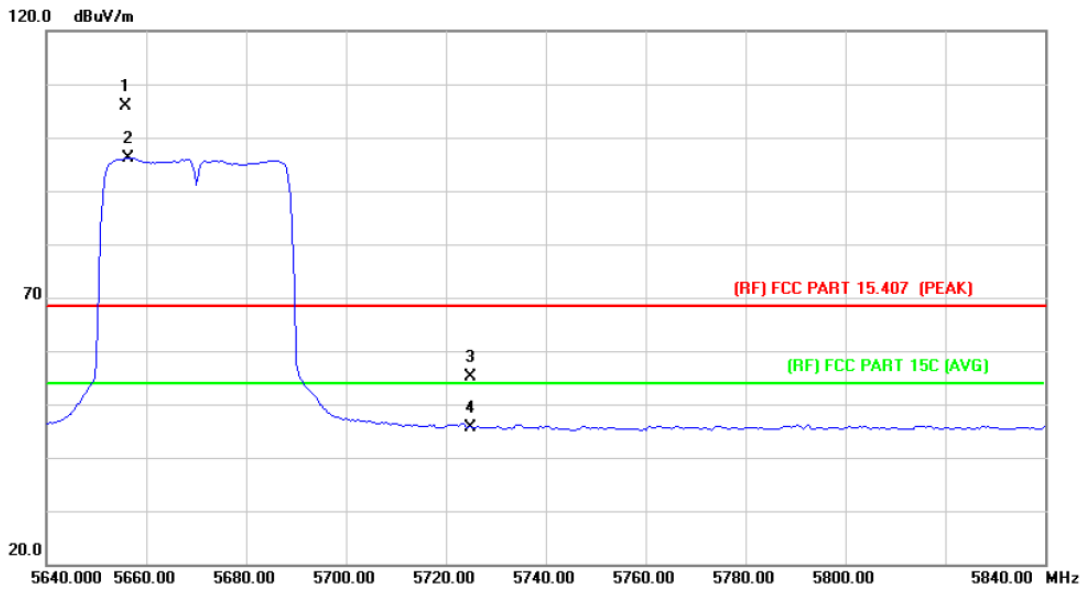


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5655.770	92.27	13.70	105.97			peak
2	*	5656.400	82.47	13.70	96.17			AVG
3		5725.000	41.21	13.89	55.10	68.30	-13.20	peak
4		5725.000	31.85	13.89	45.74	54.00	-8.26	AVG

Emission Level= Read Level+ Correct Factor



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

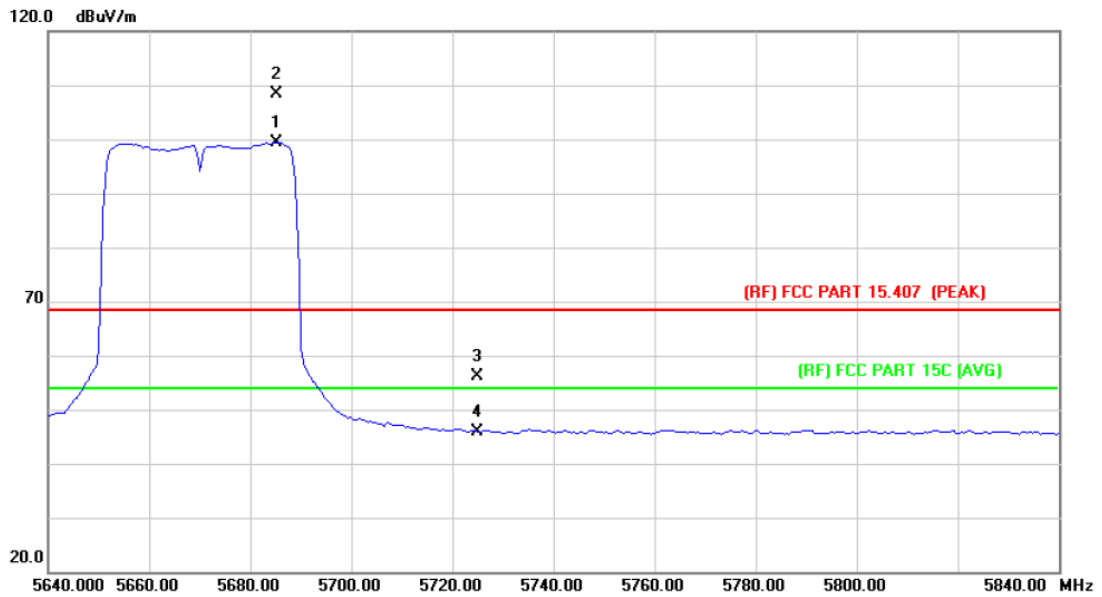


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5685.200	85.72	13.78	99.50	Fundamental Frequency		AVG
2	X	5685.310	94.56	13.78	108.34	Fundamental Frequency		peak
3		5725.000	42.23	13.89	56.12	68.30	-12.18	peak
4		5725.000	31.94	13.89	45.83	54.00	-8.17	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
<b>Remark:</b>			

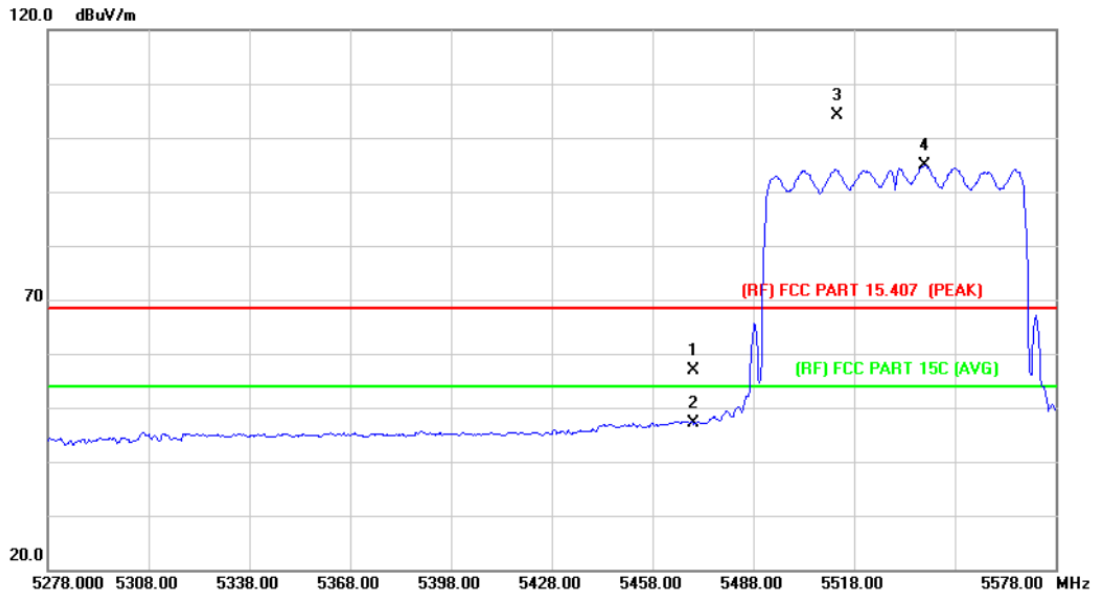

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	43.46	13.31	56.77	Fundamental Frequency		peak
2		5470.000	33.71	13.31	47.02	Fundamental Frequency		AVG
3	X	5512.820	90.68	13.33	104.01	68.30	35.71	peak
4	*	5539.000	81.49	13.40	94.89	54.00	40.89	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
<b>Remark:</b>			

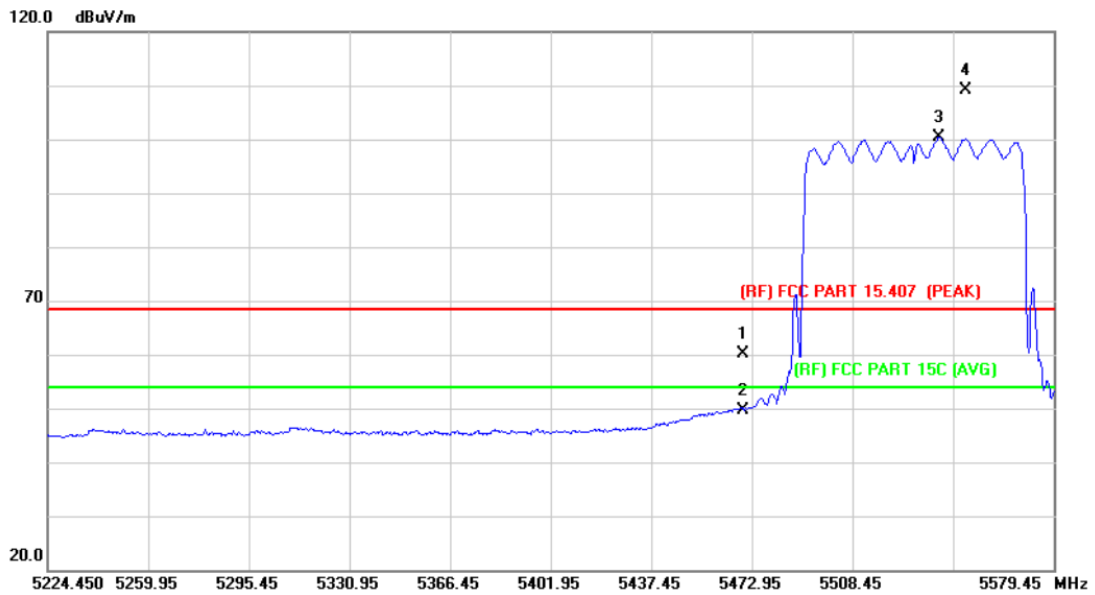


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5470.000	46.87	13.31	60.18	Fundamental Frequency		peak
2		5470.000	36.42	13.31	49.73	Fundamental Frequency		AVG
3	*	5538.980	87.03	13.40	100.43	54.00	46.43	AVG
4	X	5548.420	95.82	13.42	109.24	68.30	40.94	peak

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
<b>Remark:</b>			

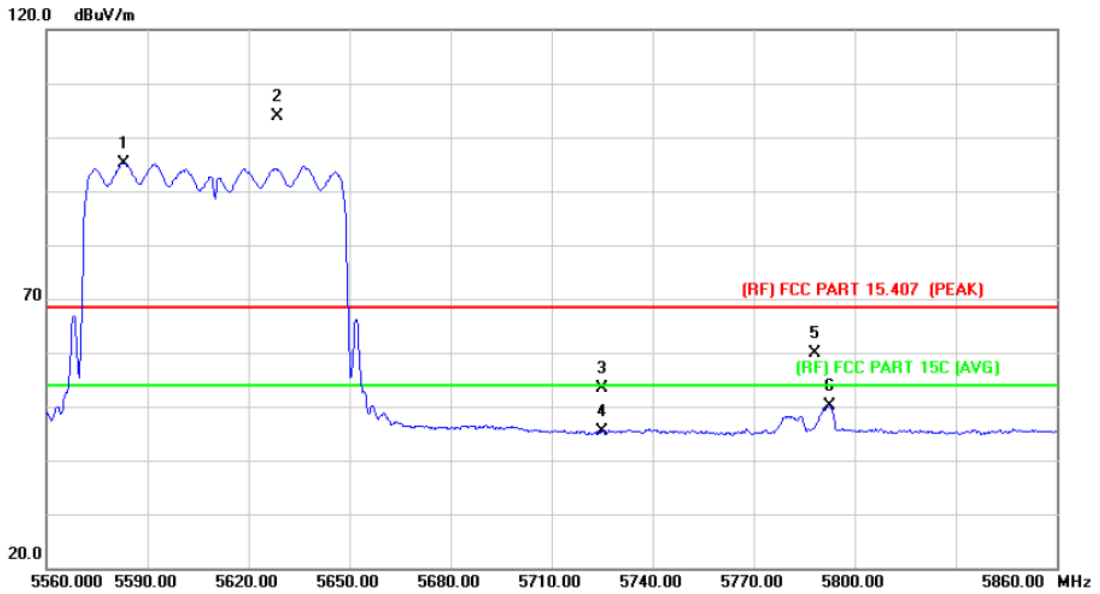


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5583.100	81.63	13.51	95.14	Fundamental Frequency		AVG
2	X	5628.780	90.27	13.63	103.90	Fundamental Frequency		peak
3		5725.000	39.45	13.89	53.34	68.30	-14.96	peak
4		5725.000	31.44	13.89	45.33	54.00	-8.67	AVG
5		5788.220	45.83	14.07	59.90	68.30	-8.40	peak
6		5792.500	36.04	14.08	50.12	54.00	-3.88	AVG

Emission Level= Read Level+ Correct Factor




Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

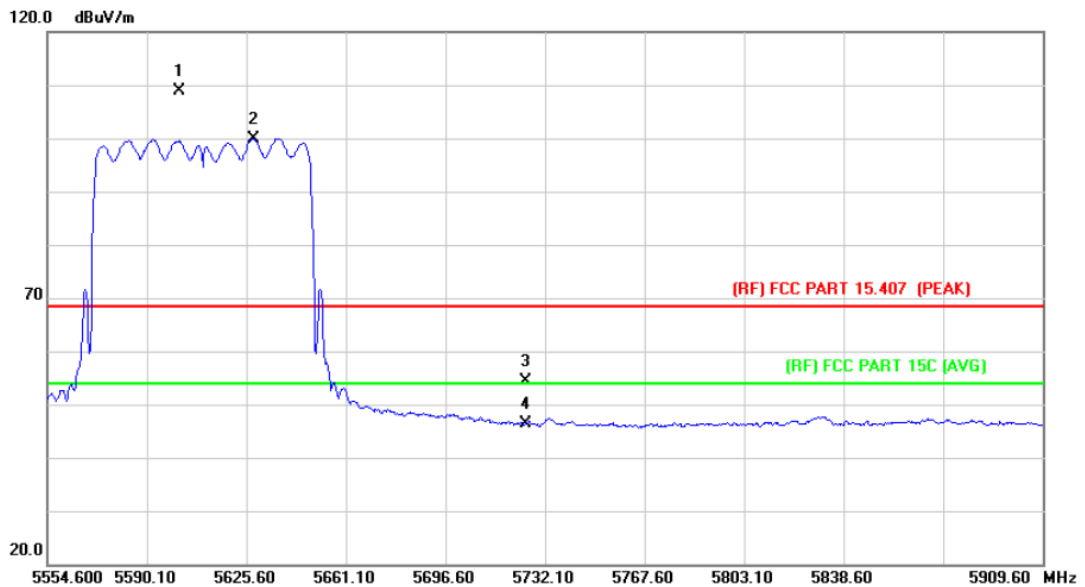

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5601.590	95.33	13.56	108.89	Fundamental Frequency		peak
2	*	5628.085	86.35	13.63	99.98	Fundamental Frequency		AVG
3		5725.000	40.60	13.89	54.49	68.30	-13.81	peak
4		5725.000	32.50	13.89	46.39	54.00	-7.61	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:			

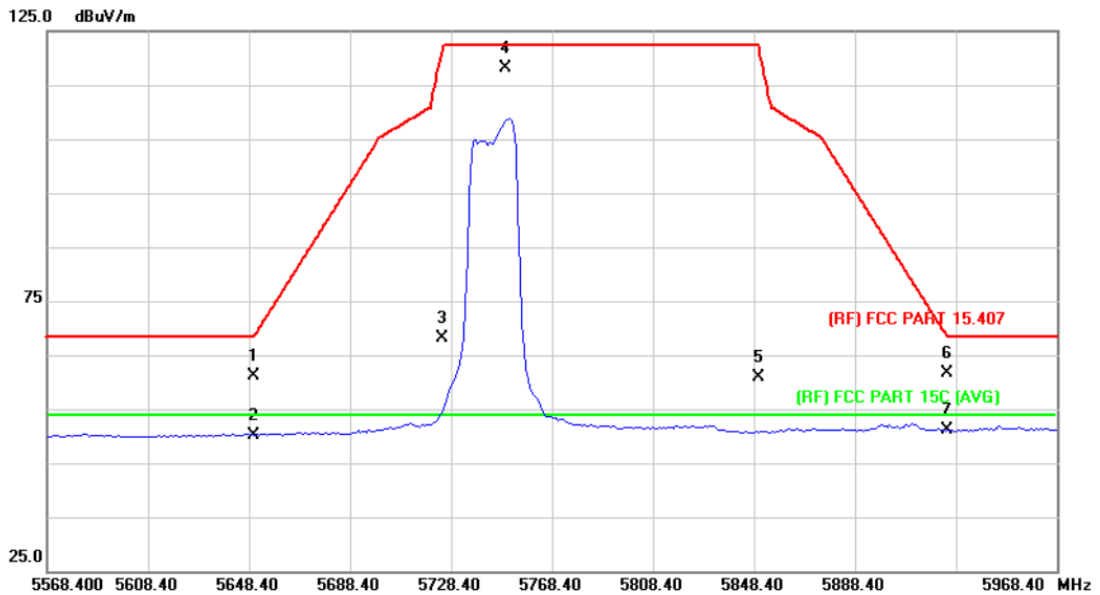


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.39	13.69	61.08	68.30	-7.22	peak
2		5650.000	36.46	13.69	50.15	54.00	-3.85	AVG
3		5725.000	54.13	13.89	68.02	122.30	-54.28	peak
4		5750.000	104.18	13.96	118.14	122.30	-4.16	peak
5		5850.000	46.75	14.23	60.98	122.30	-61.32	peak
6		5925.000	47.19	14.42	61.61	68.30	-6.69	peak
7	*	5925.000	36.66	14.42	51.08	54.00	-2.92	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5745 MHz (U-NII-3)		
<b>Remark:</b>			

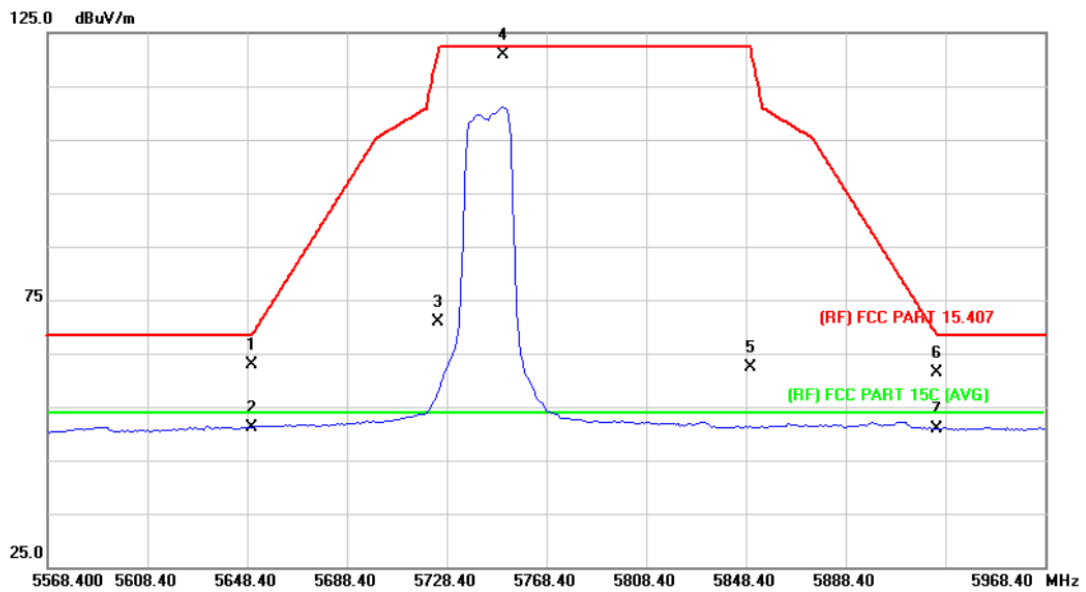


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	49.24	13.69	62.93	68.30	-5.37	peak
2		5650.000	37.40	13.69	51.09	54.00	-2.91	AVG
3		5725.000	56.95	13.89	70.84	122.30	-51.46	peak
4	*	5750.800	106.88	13.96	120.84	122.30	-1.46	peak
5		5850.000	48.04	14.23	62.27	122.30	-60.03	peak
6		5925.000	47.08	14.42	61.50	68.30	-6.80	peak
7		5925.000	36.47	14.42	50.89	54.00	-3.11	AVG

Emission Level= Read Level+ Correct Factor




Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

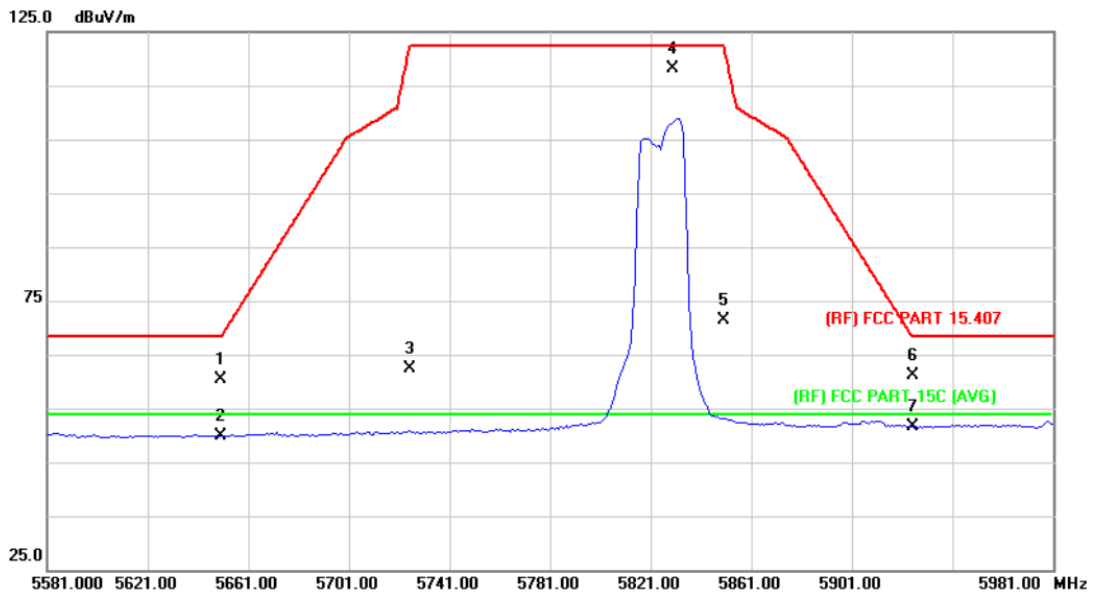

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.64	13.69	60.33	68.30	-7.97	peak
2		5650.000	36.22	13.69	49.91	54.00	-4.09	AVG
3		5725.000	48.37	13.89	62.26	122.30	-60.04	peak
4		5829.800	104.08	14.17	118.25	122.30	-4.05	peak
5		5850.000	57.27	14.23	71.50	122.30	-50.80	peak
6		5925.000	46.82	14.42	61.24	68.30	-7.06	peak
7	*	5925.000	37.20	14.42	51.62	54.00	-2.38	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

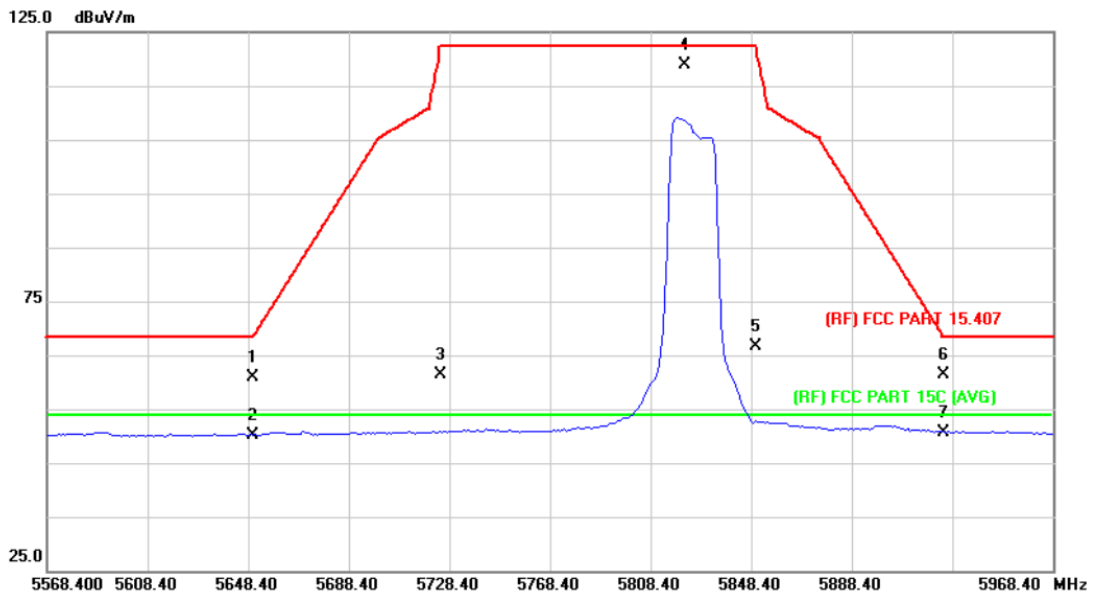


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.28	13.69	60.97	68.30	-7.33	peak
2		5650.000	36.49	13.69	50.18	54.00	-3.82	AVG
3		5725.000	47.51	13.89	61.40	122.30	-60.90	peak
4	*	5821.800	104.73	14.15	118.88	122.30	-3.42	peak
5		5850.000	52.50	14.23	66.73	122.30	-55.57	peak
6		5925.000	46.90	14.42	61.32	68.30	-6.98	peak
7		5925.000	36.12	14.42	50.54	54.00	-3.46	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
<b>Remark:</b>			

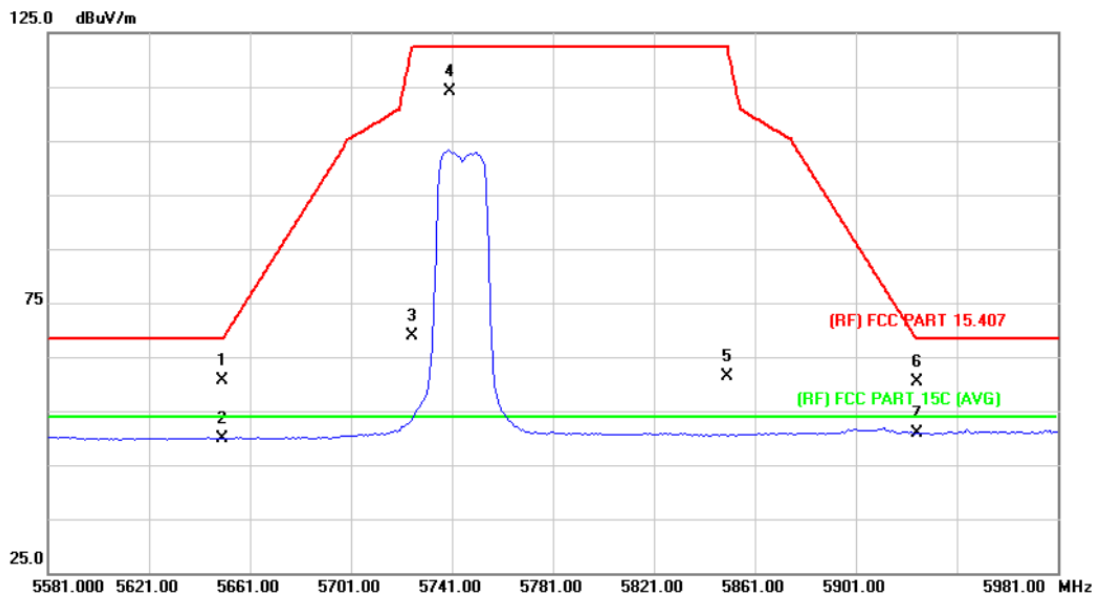


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.95	13.69	60.64	68.30	-7.66	peak
2		5650.000	36.15	13.69	49.84	54.00	-4.16	AVG
3		5725.000	55.07	13.89	68.96	122.30	-53.34	peak
4		5740.200	100.09	13.94	114.03	122.30	-8.27	peak
5		5850.000	47.17	14.23	61.40	122.30	-60.90	peak
6		5925.000	45.96	14.42	60.38	68.30	-7.92	peak
7	*	5925.000	36.36	14.42	50.78	54.00	-3.22	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
<b>Remark:</b>			

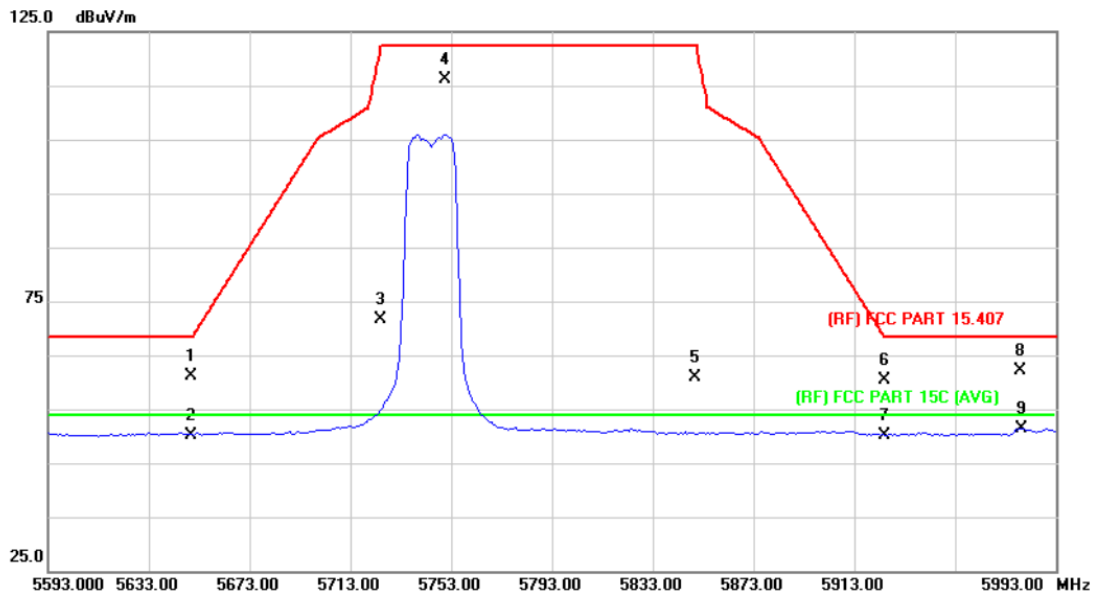

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.37	13.69	61.06	68.30	-7.24	peak
2		5650.000	36.55	13.69	50.24	54.00	-3.76	AVG
3		5725.000	57.75	13.89	71.64	122.30	-50.66	peak
4		5750.600	102.22	13.96	116.18	122.30	-6.12	peak
5		5850.000	46.54	14.23	60.77	122.30	-61.53	peak
6		5925.000	45.96	14.42	60.38	68.30	-7.92	peak
7		5925.000	35.78	14.42	50.20	54.00	-3.80	AVG
8		5979.000	47.50	14.57	62.07	68.30	-6.23	peak
9	*	5979.400	36.82	14.57	51.39	54.00	-2.61	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
<b>Remark:</b>			

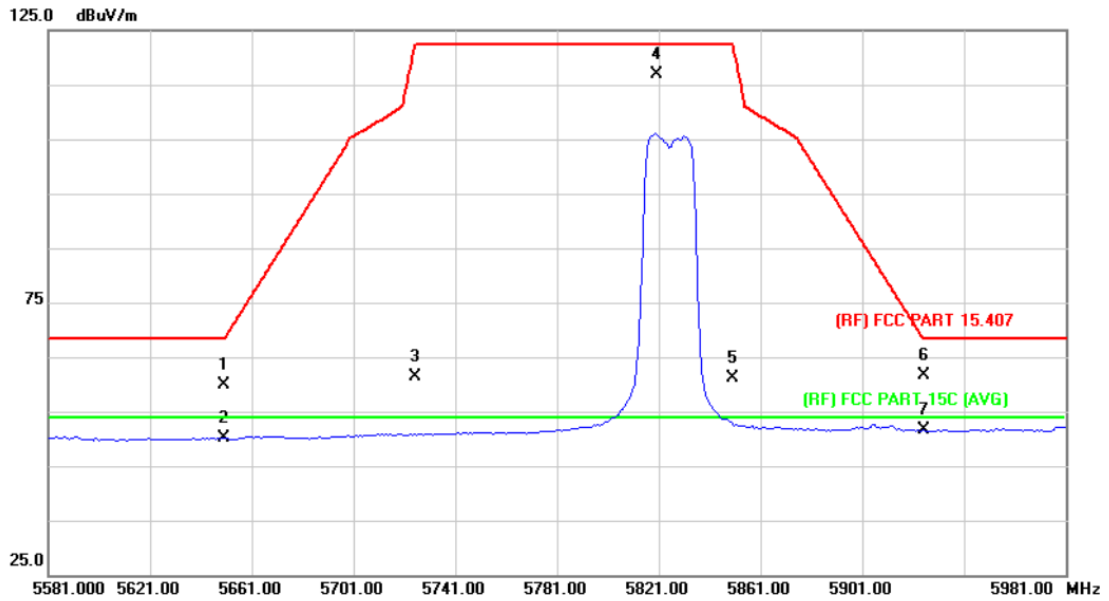


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.12	13.69	59.81	68.30	-8.49	peak
2		5650.000	36.32	13.69	50.01	54.00	-3.99	AVG
3		5725.000	47.56	13.89	61.45	122.30	-60.85	peak
4		5820.200	102.67	14.15	116.82	122.30	-5.48	peak
5		5850.000	46.78	14.23	61.01	122.30	-61.29	peak
6		5925.000	47.10	14.42	61.52	68.30	-6.78	peak
7	*	5925.000	37.15	14.42	51.57	54.00	-2.43	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
<b>Remark:</b>			

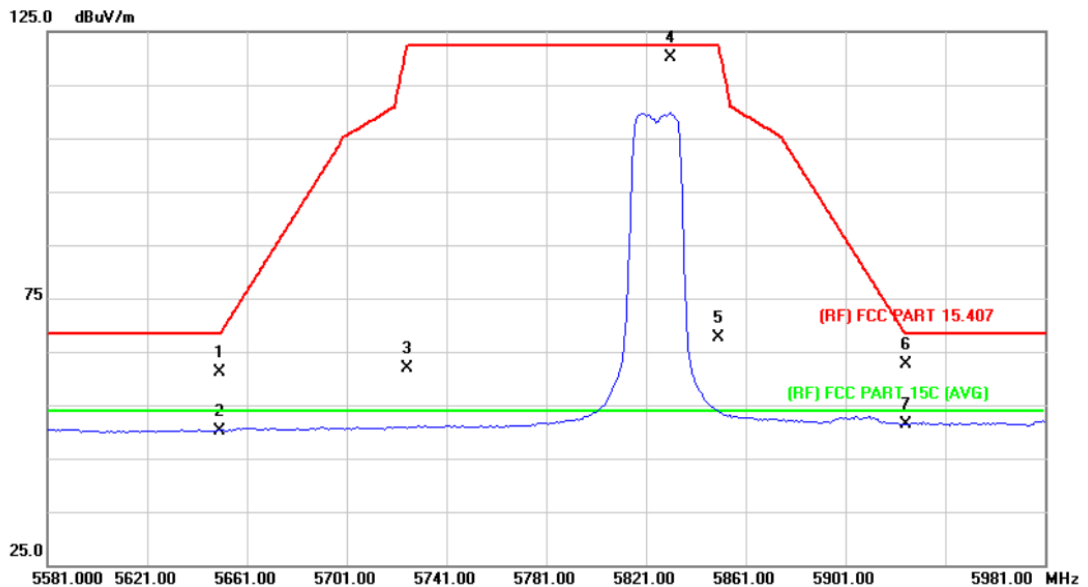


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5650.000	47.41	13.69	61.10	68.30	-7.20	peak
2		5650.000	36.50	13.69	50.19	54.00	-3.81	AVG
3		5725.000	47.91	13.89	61.80	122.30	-60.50	peak
4	*	5830.600	105.91	14.18	120.09	122.30	-2.21	peak
5		5850.000	53.36	14.23	67.59	122.30	-54.71	peak
6		5925.000	48.18	14.42	62.60	68.30	-5.70	peak
7		5925.000	37.05	14.42	51.47	54.00	-2.53	AVG

Emission Level= Read Level+ Correct Factor




<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
<b>Remark:</b>			

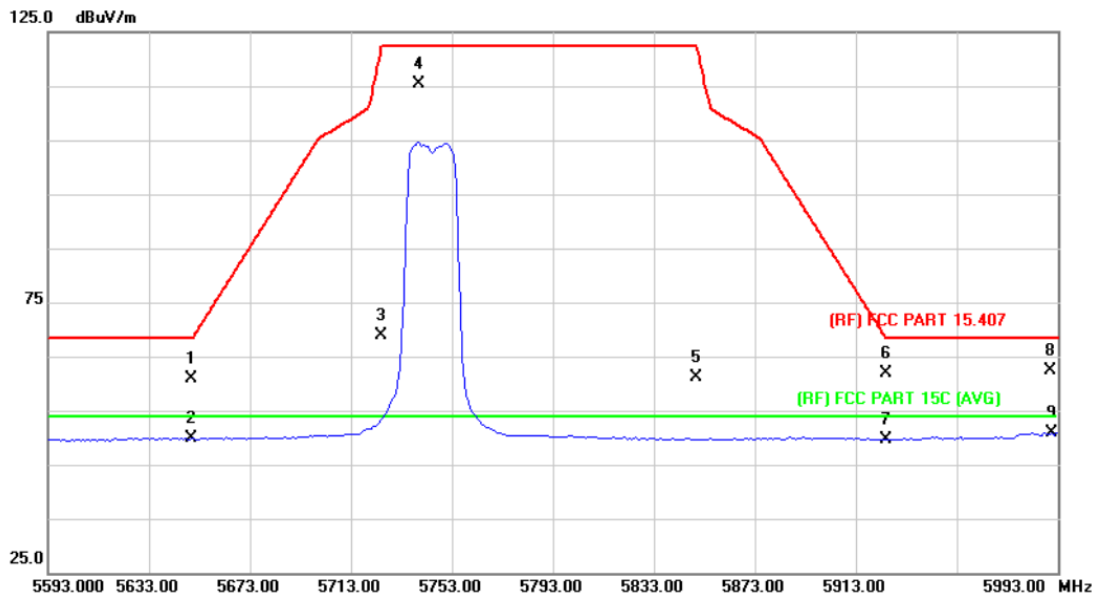

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.29	13.69	60.98	68.30	-7.32	peak
2		5650.000	36.11	13.69	49.80	54.00	-4.20	AVG
3		5725.000	55.07	13.89	68.96	122.30	-53.34	peak
4		5740.200	101.45	13.94	115.39	122.30	-6.91	peak
5		5850.000	47.02	14.23	61.25	122.30	-61.05	peak
6		5925.000	47.34	14.42	61.76	68.30	-6.54	peak
7		5925.000	35.22	14.42	49.64	54.00	-4.36	AVG
8		5990.000	47.75	14.61	62.36	68.30	-5.94	peak
9	*	5990.600	36.20	14.61	50.81	54.00	-3.19	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
<b>Remark:</b>			

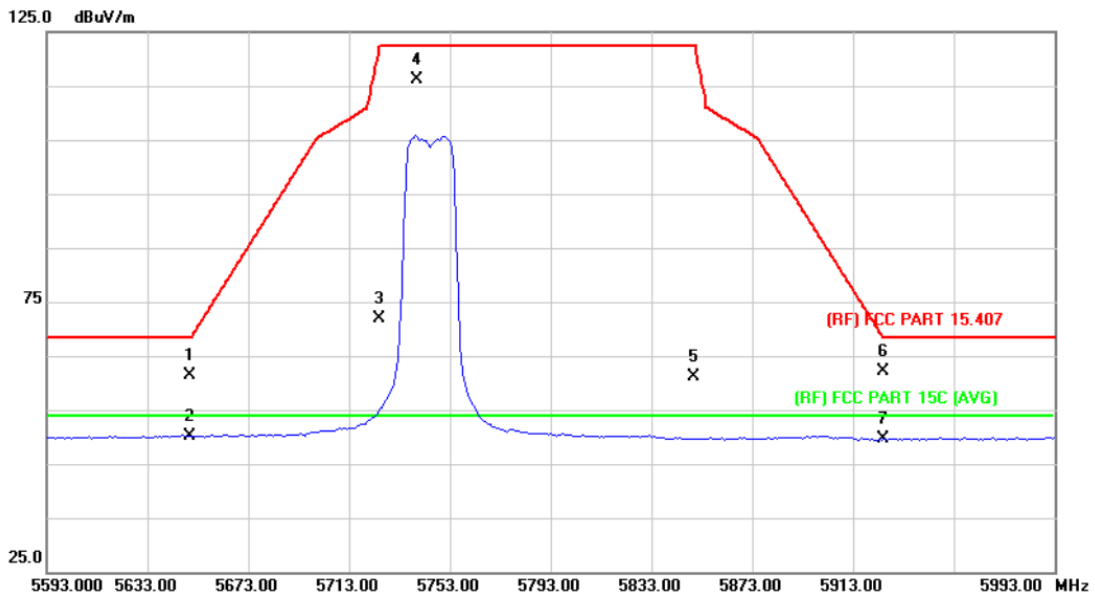


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.70	13.69	61.39	68.30	-6.91	peak
2	*	5650.000	36.38	13.69	50.07	54.00	-3.93	AVG
3		5725.000	58.04	13.89	71.93	122.30	-50.37	peak
4		5740.200	102.29	13.94	116.23	122.30	-6.07	peak
5		5850.000	46.93	14.23	61.16	122.30	-61.14	peak
6		5925.000	47.65	14.42	62.07	68.30	-6.23	peak
7		5925.000	35.15	14.42	49.57	54.00	-4.43	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
<b>Remark:</b>			

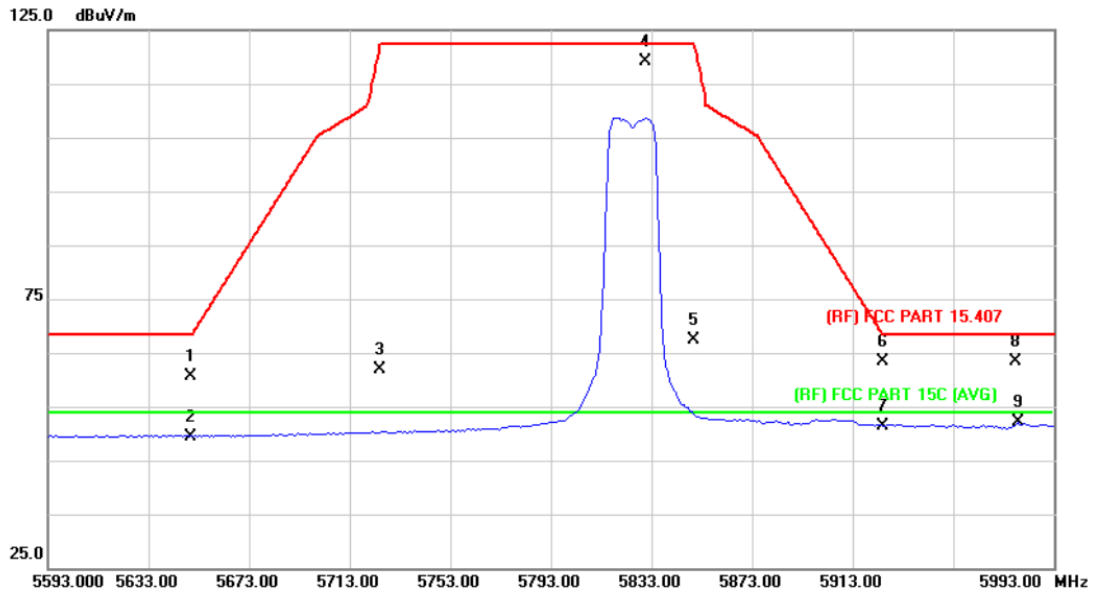


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.99	13.69	60.68	68.30	-7.62	peak
2		5650.000	35.78	13.69	49.47	54.00	-4.53	AVG
3		5725.000	48.02	13.89	61.91	122.30	-60.39	peak
4		5830.600	104.97	14.18	119.15	122.30	-3.15	peak
5		5850.000	53.15	14.23	67.38	122.30	-54.92	peak
6		5925.000	49.06	14.42	63.48	68.30	-4.82	peak
7		5925.000	36.98	14.42	51.40	54.00	-2.60	AVG
8		5978.000	48.71	14.57	63.28	68.30	-5.02	peak
9	*	5978.600	37.49	14.57	52.06	54.00	-1.94	AVG

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
<b>Remark:</b>			

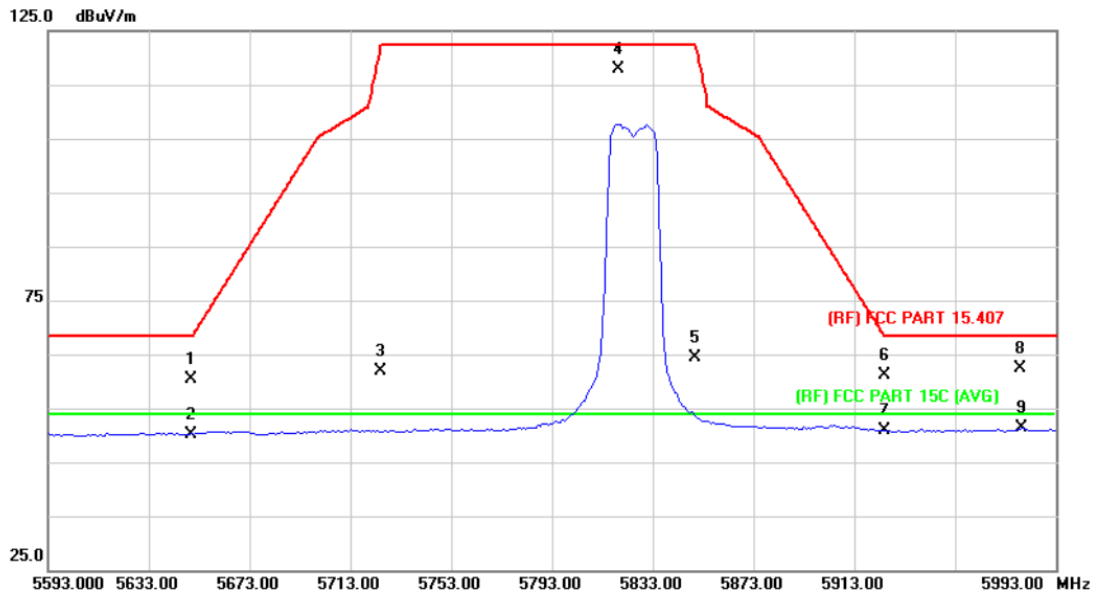

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.75	13.69	60.44	68.30	-7.86	peak
2		5650.000	36.55	13.69	50.24	54.00	-3.76	AVG
3		5725.000	47.91	13.89	61.80	122.30	-60.50	peak
4		5819.400	103.65	14.14	117.79	122.30	-4.51	peak
5		5850.000	50.11	14.23	64.34	122.30	-57.96	peak
6		5925.000	46.76	14.42	61.18	68.30	-7.12	peak
7		5925.000	36.34	14.42	50.76	54.00	-3.24	AVG
8		5979.000	47.86	14.57	62.43	68.30	-5.87	peak
9	*	5979.400	36.72	14.57	51.29	54.00	-2.71	AVG

Emission Level= Read Level+ Correct Factor