



FCC RADIO TEST REPORT

Applicant : COMTREND CORPORATION

Address : 3F-1, 10 Lane 609, Chongxin Rd., Section 5,
Sanchong Dist, New Taipei City 241405, Taiwan

Equipment : Home Gateway

Model No. : WAP-60AXd, WAP-60AX, WAP-5945s, WAP-5945

Trade Name : COMTREND

FCC ID : L9VWAP60AXD

I HEREBY CERTIFY THAT :

The sample was received on Oct. 14, 2020 and the testing was completed on Oct. 27, 2021 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





CONTENTS

1.	Summary of Test Procedure and Test Results	5
1.1.	Applicable Standards	5
2.	Test Configuration of Equipment under Test.....	6
2.1.	Feature of Equipment under Test.....	6
2.2.	Carrier Frequency of Channels.....	8
2.3.	Test Mode and Test Software.....	10
2.4.	Description of Test System.....	13
2.5.	General Information of Test.....	14
2.6.	Measurement Uncertainty	15
3.	Test Equipment and Ancillaries Used for Tests	16
4.	Antenna Requirements	19
4.1.	Standard Applicable	19
4.2.	Antenna Construction and Directional Gain.....	20
5.	Test of AC Power Line Conducted Emission	22
5.1.	Test Limit	22
5.2.	Test Procedures	22
5.3.	Typical Test Setup	23
5.4.	Test Result and Data.....	24
5.5.	Test Photographs	26
6.	Test of Spurious Emission (Radiated)	27
6.1.	Test Limit	27
6.2.	Test Procedures	28
6.3.	Typical Test Setup	29
6.4.	Test Result and Data (9kHz ~ 30MHz).....	30
6.5.	Test Result and Data (30MHz ~ 1GHz).....	30
6.6.	Test Result and Data (1GHz ~ 40GHz).....	32
6.7.	Restricted Bands of Operation	298
6.8.	Test Photographs (30MHz ~ 1GHz)	299
6.9.	Test Photographs (1GHz ~ 40GHz)	300
7.	On Time, Duty Cycle and Measurement methods	302
7.1.	Test Limit	302
7.2.	Test Procedure	302
7.3.	Test Setup Layout	302
7.4.	Test Result and Data.....	303
7.5.	Measurement Methods	303
8.	6dB Bandwidth & 99% Occupied Bandwidth	308
8.1.	Test Limit	308
8.2.	Test Procedure	308
8.3.	Test Setup Layout	308
8.4.	Test Result and Data.....	309
9.	26dB Bandwidth & 99% Occupied Bandwidth	423
9.1.	Test Limit	423



9.2. Test Procedure	423
9.3. Test Setup Layout	423
9.4. Test Result and Data.....	424
10. Average Power.....	731
10.1. Test Limit	731
10.2. Test Procedure	732
10.3. Test Setup Layout	732
10.4. Test Result and Data.....	733
11. Power Spectral Density.....	795
11.1. Test Limit	795
11.2. Test Procedure	795
11.3. Test Setup Layout	795
11.4. Test Result and Data.....	796
12. Radio Frequency Exposure	989
12.1. Applicable Standards	989
12.2. EUT Specification	989
12.3. Test Results.....	989
12.4. Calculation.....	990
12.5. Maximum Permissible Exposure.....	991



History of this test report



1. Summary of Test Procedure and Test Results

1.1. Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart E §15.407

KDB 789033

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207(a)	AC Power Line Conducted Emission	PASS
15.407(b) 15.209	Radiated Spurious Emission	PASS
15.407(a)	26 dB & Occupied Bandwidth	PASS
15.407	6 dB Bandwidth	PASS
15.407 (a) & (a)(3)	Average Power	PASS
15.407(a)	Power Spectral Density	PASS
2.1091	Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(TEFD2010059).



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

Operation Frequency Range	802.11b/g/n/ax: 2400-2483.5MHz 802.11a/n/ac/ax: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Center Frequency Range	802.11b/g/n/ax: 2412MHz~2462MHz 802.11a/n/ac/ax: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz
Modulation Type	WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	DSSS, OFDM, OFDMA
Data Rate	WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS31, HT20/40 802.11ax: MCS0 – MCS11, HE20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS31, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/160 802.11ax: MCS0 – MCS11, HE20/40/80
Antenna Type	PIFA Antenna
Antenna Gain	2400-2483.5MHz: ANT B: 3.07dBi, ANT C: 3.4dBi, ANT D: 2.87dBi, ANT E: 4.02dBi 5150-5250MHz: ANT A: 2.74dBi, ANT B: 3.37dBi, ANT C: 3.37dBi, ANT D: 3.28dBi, ANT E: 3.37dBi 5250-5350MHz: ANT A: 2.59dBi, ANT B: 3.44dBi, ANT C: 3.44dBi, ANT D: 3.25dBi, ANT E: 3.44dBi 5470-5725MHz: ANT A: 3.84dBi, ANT B: 3.45dBi, ANT C: 3.45dBi, ANT D: 3.34dBi, ANT E: 3.45dBi 5725-5850MHz: ANT A: 4.25dBi, ANT B: 3.19dBi, ANT C: 3.19dBi, ANT D: 3.29dBi, ANT E: 3.19dBi
Adapter	1. Brand: Amigo, Model: AMS200-1202000FU 2. Brand: ChenZhou Focom Electronics Co., Ltd., Model: F24L9-120200SPAU
Firmware Number	CEU-2.0.1
Serial Number	20A5945SXXF-A9100001

Note:

1. EUT support TPC Function.
2. WLAN 2.4G and WLAN 5G can simultaneously transmission.
3. EUT support Master Mode.
4. EUT support AP Mode.
5. WLAN 2.4GHz 802.11n and 802.11ax support beamforming Function.



6. WLAN 5GHz 802.11n and 802.11ac and 802.11ax support beamforming Function.
7. For more details, please refer to the User's manual of the EUT.

Difference description:

Model No.	Remark
WAP-60AX	1. 1x ETH port version.
WAP-5945	2. The difference between WAP-60AX and WAP-5945 is Market Segmentation.
WAP-60AXd	1. 2x ETH port version.
WAP-5945s	2. The difference between WAP-60AXd and WAP-5945s is Market Segmentation.



2.2. Carrier Frequency of Channels

Band: 5150MHz-5250MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*36	5180	44	5220
*40	5200	*48	5240

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*38	5190	*46	5230

802.11ac VHT80 , 802.11ax HE80

Channel	Frequency(MHz)
*42	5210

Band: 5250MHz -5350MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*52	5260	*60	5300
56	5280	*64	5320

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*54	5270	*62	5310

802.11ac VHT80, 802.11ax HE80

Channel	Frequency(MHz)
*58	5290

Band: 5150MHz -5350MHz: Straddle Channel

802.11ac VHT160

Channel	Frequency(MHz)
*50	5250

Band: 5470MHz -5725MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*100	5500	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
116	5580	*140	5700
*120	5600		

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*102	5510	126	5630
110	5550	*134	5670
*118	5590		

802.11ac VHT80, 802.11ax HE80

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*106	5530	*122	5610



Band: 5470MHz -5725MHz: Straddle Channel
802.11a, 802.11n HT 20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)
*144	5720

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)
*142	5710

802.11ac VHT80, 802.11ax HE80

Channel	Frequency(MHz)
*138	5690

802.11ac VHT160

Channel	Frequency(MHz)
*114	5570

Band: 5725MHz -5850MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*149	5745	161	5805
153	5765	*165	5825
*157	5785		

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*151	5755	*159	5795

802.11ac VHT80, 802.11ax HE80

Channel	Frequency(MHz)
*155	5775

Note: Channels remarked * are selected to perform test.



2.3. Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- c. An executive program, "wl command" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11a (6Mbps) , (120V/60 Hz)
2	802.11n HT20 (6.5Mbps) , (120V/60 Hz)
3	802.11n HT40 (13.5Mbps) , (120V/60 Hz)
4	802.11ac VHT20 (6.5Mbps) , (120V/60 Hz)
5	802.11ac VHT40 (13.5Mbps) , (120V/60 Hz)
6	802.11ac VHT80 (29.3Mbps) , (120V/60 Hz)
7	802.11ac VHT160 (58.5Mbps) , (120V/60 Hz)
8	802.11ax HE20 (7.3Mbps) , (120V/60 Hz)
9	802.11ax HE40 (14.6Mbps) , (120V/60 Hz)
10	802.11ax HE80 (30.6Mbps) , (120V/60 Hz)
11	802.11a (6Mbps) , (240V/60 Hz)
12	802.11n HT20 (6.5Mbps) , (240V/60 Hz)
13	802.11n HT40 (13.5Mbps) , (240V/60 Hz)
14	802.11ac VHT20 (6.5Mbps) , (240V/60 Hz)
15	802.11ac VHT40 (13.5Mbps) , (240V/60 Hz)
16	802.11ac VHT80 (29.3Mbps) , (240V/60 Hz)
17	802.11ac VHT160 (58.5Mbps) , (240V/60 Hz)
18	802.11ax HE20 (7.3Mbps) , (240V/60 Hz)
19	802.11ax HE40 (14.6Mbps) , (240V/60 Hz)
20	802.11ax HE80 (30.6Mbps) , (240V/60 Hz)

caused "Test Mode 11" generated the worst case, it was reported as the final data.



Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11a (6Mbps) , Non BeamForming
2	802.11n HT20 (6.5Mbps) , Non BeamForming
3	802.11n HT40 (13.5Mbps) , Non BeamForming
4	802.11ac VHT20 (6.5Mbps) , Non BeamForming
5	802.11ac VHT40 (13.5Mbps) , Non BeamForming
6	802.11ac VHT80 (29.3Mbps) , Non BeamForming
7	802.11ac VHT160 (58.5Mbps) , Non BeamForming
8	802.11ax HE20 (7.3Mbps) , Non BeamForming
9	802.11ax HE40 (14.6Mbps) , Non BeamForming
10	802.11ax HE80 (30.6Mbps) , Non BeamForming
11	802.11n HT20 (6.5Mbps) , BeamForming
12	802.11n HT40 (13.5Mbps) , BeamForming
13	802.11ac VHT20 (6.5Mbps) , BeamForming
14	802.11ac VHT40 (13.5Mbps) , BeamForming
15	802.11ac VHT80 (29.3Mbps) , BeamForming
16	802.11ac VHT160 (58.5Mbps) , BeamForming
17	802.11ax HE20 (7.3Mbps) , BeamForming
18	802.11ax HE40 (14.6Mbps) , BeamForming
19	802.11ax HE80 (30.6Mbps) , BeamForming

caused "Test Mode 1" generated the worst case, it was reported as the final data.



Radiation Emissions (1GHz ~ 40GHz)	
Test Mode	Operating Description
1	802.11a (6Mbps) , Non BeamForming
2	802.11n HT20 (6.5Mbps) , Non BeamForming
3	802.11n HT40 (13.5Mbps) , Non BeamForming
4	802.11ac VHT20 (6.5Mbps) , Non BeamForming
5	802.11ac VHT40 (13.5Mbps) , Non BeamForming
6	802.11ac VHT80 (29.3Mbps) , Non BeamForming
7	802.11ac VHT160 (58.5Mbps) , Non BeamForming
8	802.11ax HE20 (7.3Mbps) , Non BeamForming
9	802.11ax HE40 (14.6Mbps) , Non BeamForming
10	802.11ax HE80 (30.6Mbps) , Non BeamForming
11	802.11n HT20 (6.5Mbps) , BeamForming
12	802.11n HT40 (13.5Mbps) , BeamForming
13	802.11ac VHT20 (6.5Mbps) , BeamForming
14	802.11ac VHT40 (13.5Mbps) , BeamForming
15	802.11ac VHT80 (29.3Mbps) , BeamForming
16	802.11ac VHT160 (58.5Mbps) , BeamForming
17	802.11ax HE20 (7.3Mbps) , BeamForming
18	802.11ax HE40 (14.6Mbps) , BeamForming
19	802.11ax HE80 (30.6Mbps) , BeamForming

caused "Test Mode 1, 4~10, 13~19" generated the worst case, they were reported as the final data.

There are two adapters:

Adapter 1.Brand: Amigo, Model: AMS200-1202000FU

Adapter 2.Brand: ChenZhou Frecom Electronics Co., Ltd., Model: F24L9-120200SPAU

For AC Power Line Conducted Emission, adapter 2 is worst case.

For Radiated Spurious Emission, adapter 1 is worst case.

The EUT incorporates a MIMO function

Modulation Type	TX CONFIGURATION
802.11a	5TX
802.11n HT20	5TX
802.11n HT40	5TX
802.11ac VHT20	5TX
802.11ac VHT40	5TX
802.11ac VHT80	5TX
802.11ac VHT160	5TX
802.11ax HE20	5TX
802.11ax HE40	5TX
802.11ax HE80	5TX



2.4. Description of Test System

Non-Beamforming

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	15m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5270	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	1.2m / NS	N/A

Beamforming

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
AP	Comstrand	WAP-5945s	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
AP	Comstrand	WAP-5945s	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
RJ45 Cable	N/A	N/A	15m / NS	N/A



2.5. General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881				
	FCC	TW1439, TW1079			
	IC	4934E-1, 4934E-2			
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz			
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz				
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.				

Non-Beamforming

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2021/02/23~2021/10/27	22~28°C / 42~52%	Nick Guan
Radiated Emissions (Above 1GHz)	3M02-NK	2020/12/04~2021/02/27	21~25°C / 42~43%	Nick Guan
Radiated Emissions (Below 1GHz)	3M02-NK	2021/07/28	24°C / 45%	Nick Guan
AC Power Line Conducted Emission	CON01-NK	2021/10/06	26°C / 55%	Dian Chen

Beamforming

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2021/07/21~2021/10/27	25~30°C / 47~52%	Nick Guan
Radiated Emissions	3M02-NK	2021/07/15~2021/07/28	22~25°C / 42~48%	Nick Guan



2.6. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Non-Beamforming

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.63dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~40GHz)	±6.597dB
6dB Bandwidth	±4.404%
26dB Bandwidth	±4.422%
Occupied Bandwidth	±4.400%
Peak Output Power(Conducted Power Meter)	±1.02dB
Power Spectral Density	±1.954dB
Duty Cycle	±3.47%

Beamforming

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~40GHz)	±6.6dB
6dB Bandwidth	±4.4%
26dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Power Spectral Density	±1.8dB
Duty Cycle	±1.5%



3. Test Equipment and Ancillaries Used for Tests

Non-Beamforming

Test Item	Radiated Emissions (Above 1GHz)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Horn Antenna	EMCO	3115	31601	2020/10/16	2021/10/15
Horn Antenna	EMCO	3116	31974	2020/09/24	2021/09/23
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Preamplifier	EM Electronics corp.	EM330	60660	2020/03/16	2021/03/15
Preamplifier	Agilent	8449B	3008A01954	2020/03/16	2021/03/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Cable-0.5m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805443/4	2020/05/27	2021/05/26
Cable-3m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805796/4	2020/05/27	2021/05/26
Cable-8m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805795/4	2020/05/27	2021/05/26
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2020/04/01	2021/03/31
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2020/04/01	2021/03/31
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50 314	2020/04/09	2021/04/08
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	Radiated Emissions (Below 1GHz)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2021/04/26	2022/04/25
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2021/06/30	2022/06/29
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/07/14	2022/07/13
Preamplifier	EM Electronics corp.	EM330	60658	2020/10/20	2021/10/19
Preamplifier	EM Electronics corp.	EM330	60660	2021/03/18	2022/03/17
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/12	2022/04/11
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2021/04/03	2022/04/02
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2021/04/09	2022/04/08
Cable-6m(9k~300M)	NA	CFD300-NL	NA	2021/03/15	2022/03/14
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA



Non-Beamforming

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2020/07/07	2021/07/06
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/07/14	2022/07/13
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250703	2020/04/17	2021/04/16
Attenuator	KEYSIGHT	8491B	MY39250703	2021/04/09	2022/04/08
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2020/08/25	2021/08/24
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2021/08/27	2022/08/26
Power Meter	Anritsu	ML2495A	1224005	2020/04/17	2021/04/16
Power Meter	Anritsu	ML2495A	1224005	2021/04/14	2022/04/13
Power Sensor	Anritsu	MA2411B	1207295	2020/04/17	2021/04/16
Power Sensor	Anritsu	MA2411B	1207295	2021/04/14	2022/04/13

Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101402	2021/03/12	2022/03/11
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2021/06/02	2022/06/01
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2021/03/10	2022/03/09
Cable-6m(9k~300M)	NA	CFD300-NL	NA	2021/03/15	2022/03/14
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



Beamforming

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2021/04/26	2022/04/25
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
Horn Antenna	EMCO	3115	31601	2020/10/16	2021/10/15
Horn Anrenna	EMCO	3116	31974	2020/09/24	2021/09/23
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2021/06/30	2022/06/29
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/07/14	2022/07/13
Preamplifier	EM Electronics corp.	EM330	60658	2020/10/20	2021/10/19
Preamplifier	EM Electronics corp.	EM330	60660	2021/03/18	2022/03/17
Preamplifier	Agilent	8449B	3008A01954	2021/03/22	2022/03/21
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/12	2022/04/11
Cable-0.5m(1G-18G)	EMEC	EM104-SMSM-0.5M	CCE1354	2021/05/06	2022/05/05
Cable-3m(1G-18G)	EMEC	EM104-SMSM-3M	CCE1355	2021/05/06	2022/05/05
Cable-8m(1G-18G)	EMEC	EM104-SMSM-8M	CCE1356	2021/05/06	2022/05/05
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2021/04/03	2022/04/02
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2021/04/09	2022/04/08
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50 314	2021/04/08	2022/04/07
Cable-6m(9k~300M)	NA	CFD300-NL	NA	2021/03/15	2022/03/14
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/07/14	2022/07/13
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250703	2021/04/09	2022/04/08
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2020/08/25	2021/08/24
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2021/08/27	2022/08/26
Power Meter	Anritsu	ML2495A	1224005	2021/04/14	2022/04/13
Power Sensor	Anritsu	MA2411B	1207295	2021/04/14	2022/04/13



4. Antenna Requirements

4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



4.2. Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	<p>5150-5250MHz: ANT A: 2.74dBi, ANT B: 3.37dBi, ANT C: 3.37dBi, ANT D: 3.28dBi, ANT E: 3.37dBi</p> <p>5250-5350MHz: ANT A: 2.59dBi, ANT B: 3.44dBi, ANT C: 3.44dBi, ANT D: 3.25dBi, ANT E: 3.44dBi</p> <p>5470-5725MHz: ANT A: 3.84dBi, ANT B: 3.45dBi, ANT C: 3.45dBi, ANT D: 3.34dBi, ANT E: 3.45dBi</p> <p>5725-5850MHz: ANT A: 4.25dBi, ANT B: 3.19dBi, ANT C: 3.19dBi, ANT D: 3.29dBi, ANT E: 3.19dBi</p>

Non-Beamforming

5150MHz -5250MHz	<p>For 20MHz channel widths Power directional gain= $G_{ant} + \text{Array Gain} = 6.37 \text{ dBi}$</p> <p>For channel widths $\geq 40 \text{ MHz}$ Power directional gain= 3.37 dBi</p> <p>For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 10.22 (dBi)</p>
5250MHz -5350MHz	<p>For 20MHz channel widths Power directional gain= $G_{ant} + \text{Array Gain} = 6.44 \text{ dBi}$</p> <p>For channel widths $\geq 40 \text{ MHz}$ Power directional gain= 3.44 dBi</p> <p>For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 10.23 (dBi)</p>
5470MHz -5725MHz	<p>For 20MHz channel widths Power directional gain= $G_{ant} + \text{Array Gain} = 6.84 \text{ dBi}$</p> <p>For channel widths $\geq 40 \text{ MHz}$ Power directional gain= 3.84 dBi</p> <p>For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 10.50 (dBi)</p>
5725MHz -5850MHz	<p>For 20MHz channel widths Power directional gain= $G_{ant} + \text{Array Gain} = 7.25 \text{ dBi}$</p> <p>For channel widths $\geq 40 \text{ MHz}$ Power directional gain= 4.25 dBi</p> <p>For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 10.42 (dBi)</p>

*MIMO type: Cyclic Delay Diversity (CDD) mode.



Beamforming

5150MHz -5250MHz

For Power directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.22 (dBi)

For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.22 (dBi)

5250MHz -5350MHz

For Power directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.23 (dBi)

For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.23 (dBi)

5470MHz -5725MHz

For Power directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.50 (dBi)

For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.50 (dBi)

5725MHz -5850MHz

For Power directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.42 (dBi)

For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$
= 10.42 (dBi)



5. Test of AC Power Line Conducted Emission

5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3. Typical Test Setup

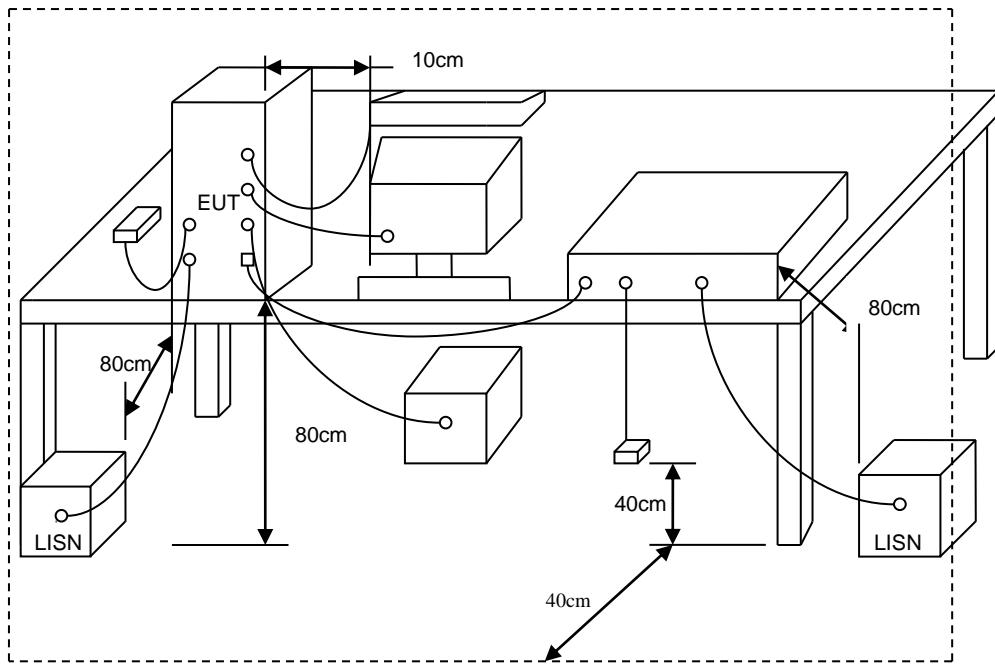



5.4. Test Result and Data

Power :	AC 240V / 60Hz	Pol/Phase :	LINE
Test Mode :	Mode 11		

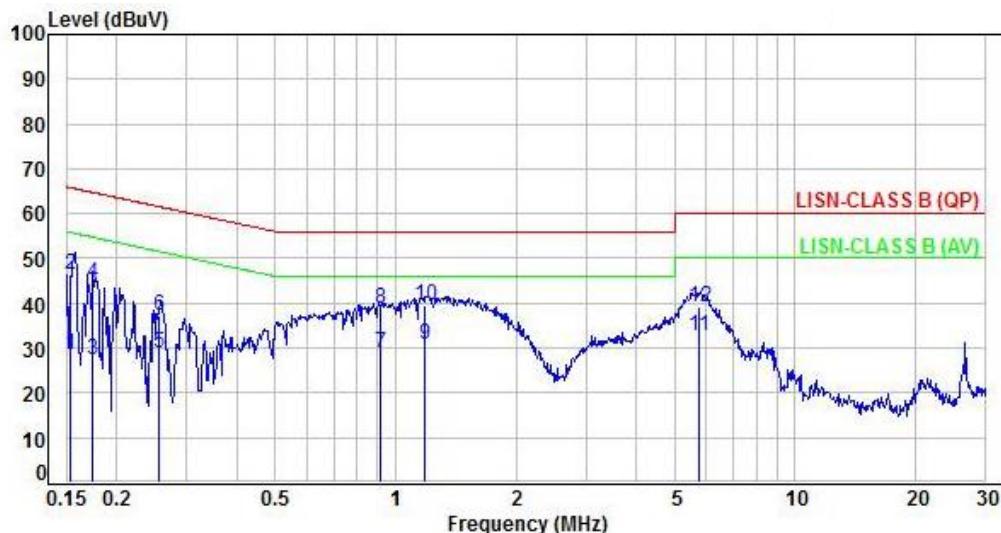

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.97	18.54	28.51	55.84	-27.33	Average	P
2	0.15	9.97	36.36	46.33	65.84	-19.51	QP	P
3	0.17	9.97	17.33	27.30	54.79	-27.49	Average	P
4	0.17	9.97	34.35	44.32	64.79	-20.47	QP	P
5	0.25	9.97	19.06	29.03	51.59	-22.56	Average	P
6	0.25	9.97	27.40	37.37	61.59	-24.22	QP	P
7	0.91	10.05	18.87	28.92	46.00	-17.08	Average	P
8	0.91	10.05	28.90	38.95	56.00	-17.05	QP	P
9	1.19	10.06	20.58	30.64	46.00	-15.36	Average	P
10	1.19	10.06	29.54	39.60	56.00	-16.40	QP	P
11	5.73	10.26	22.42	32.68	50.00	-17.32	Average	P
12	5.73	10.26	28.78	39.04	60.00	-20.96	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	AC 240V / 60Hz	Pol/Phase :	NEUTRAL
Test Mode :	Mode 11	:	

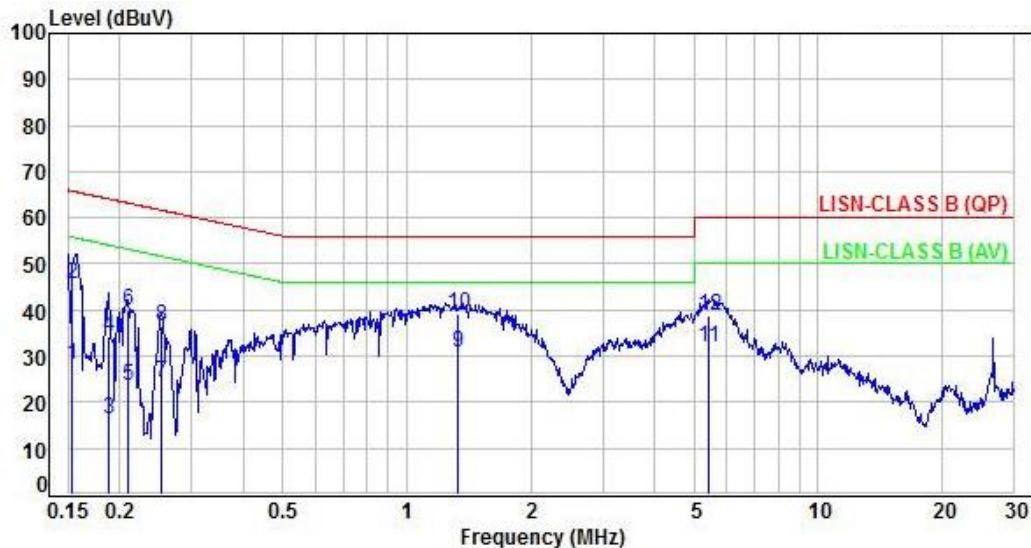

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.97	18.34	28.31	55.85	-27.54	Average	P
2	0.15	9.97	35.81	45.78	65.85	-20.07	QP	P
3	0.19	9.97	6.33	16.30	54.07	-37.77	Average	P
4	0.19	9.97	24.16	34.13	64.07	-29.94	QP	P
5	0.21	9.97	13.62	23.59	53.23	-29.64	Average	P
6	0.21	9.97	30.09	40.06	63.23	-23.17	QP	P
7	0.25	9.97	14.47	24.44	51.63	-27.19	Average	P
8	0.25	9.97	26.61	36.58	61.63	-25.05	QP	P
9	1.33	10.06	20.58	30.64	46.00	-15.36	Average	P
10	1.33	10.06	29.06	39.12	56.00	-16.88	QP	P
11	5.41	10.22	21.57	31.79	50.00	-18.21	Average	P
12	5.41	10.22	28.64	38.86	60.00	-21.14	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1. Test Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.



6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.




6.3. Typical Test Setup


Below 30MHz test setup

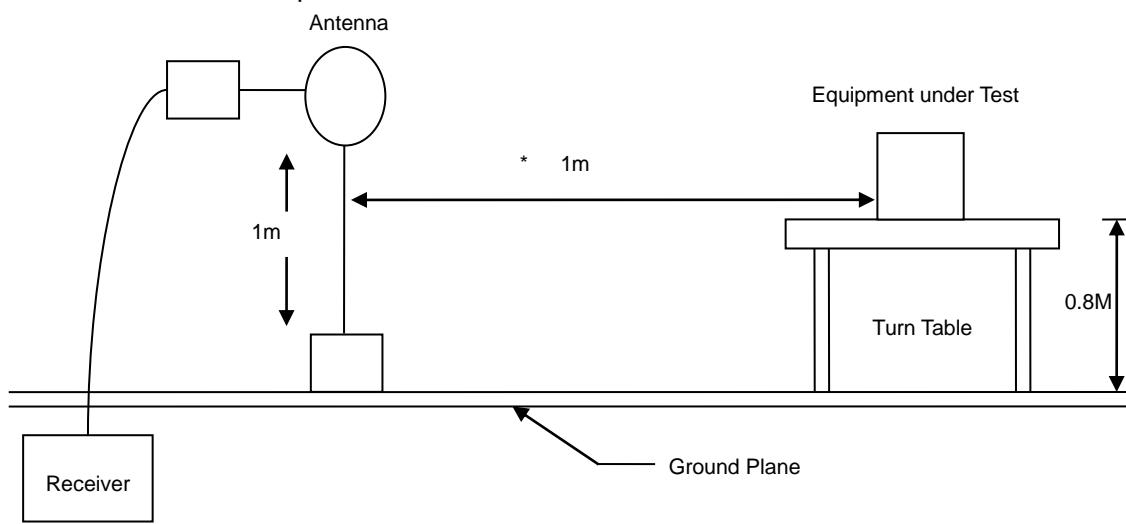

30MHz- 1GHz Test Setup

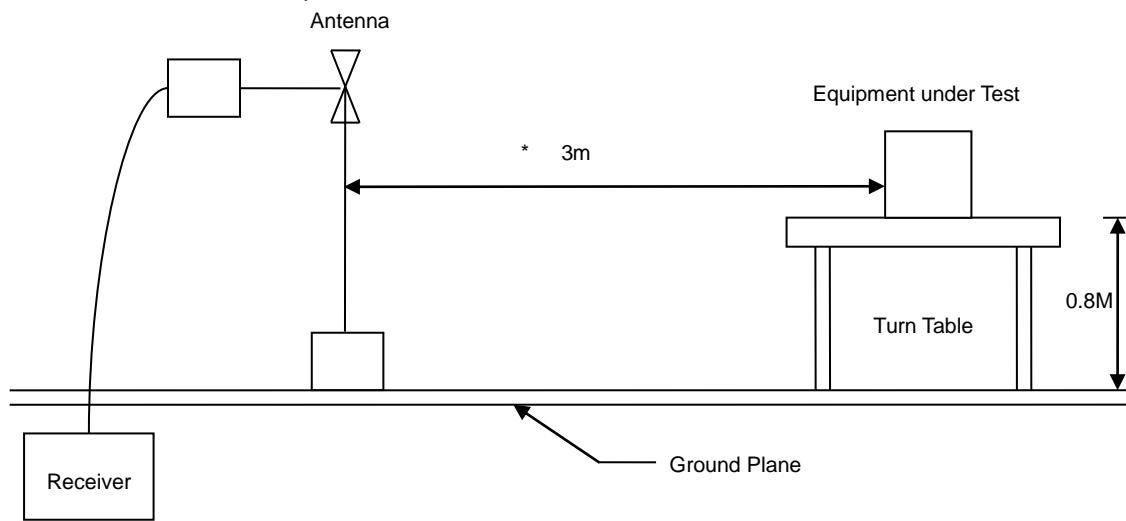

Above 1GHz Test Setup

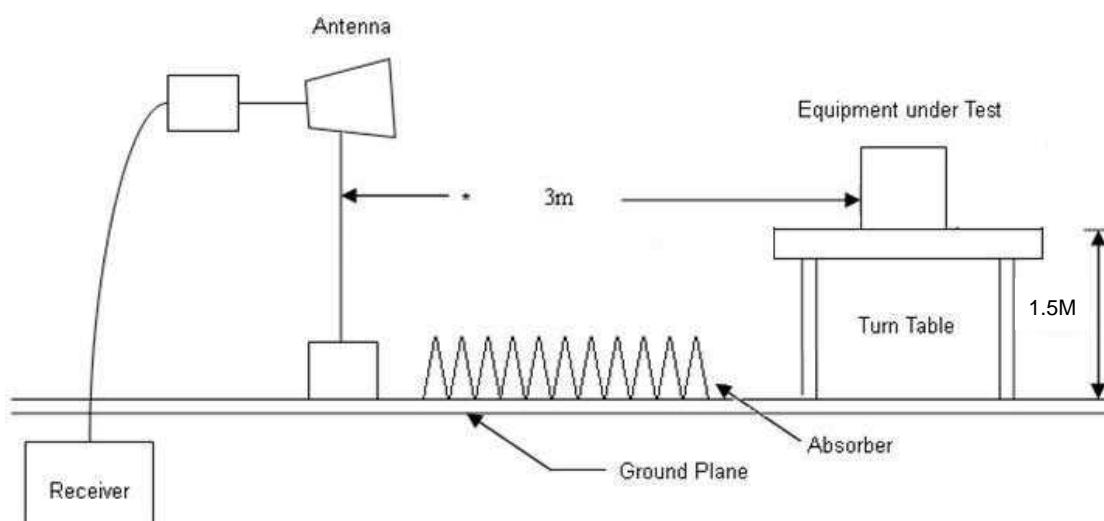




6.4. Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5. Test Result and Data (30MHz ~ 1GHz)

Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1	:	

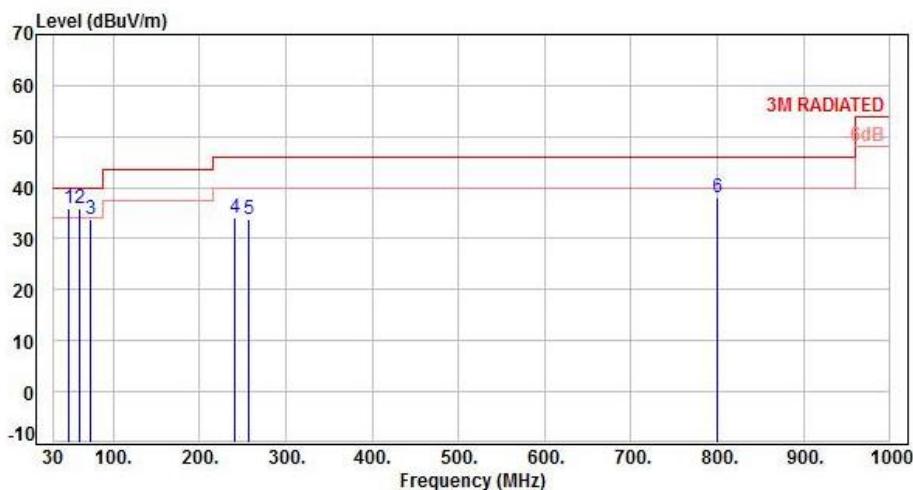

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	47.58	-10.56	46.36	35.80	40.00	-4.20	Peak	400	0	P
2	61.12	-11.78	47.63	35.85	40.00	-4.15	Peak	400	0	P
3	72.78	-13.22	46.97	33.75	40.00	-6.25	Peak	400	0	P
4	241.54	-11.87	45.87	34.00	46.00	-12.00	Peak	400	0	P
5	256.85	-11.26	44.92	33.66	46.00	-12.34	Peak	400	0	P
6	800.33	0.62	37.45	38.07	46.00	-7.93	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1	:	

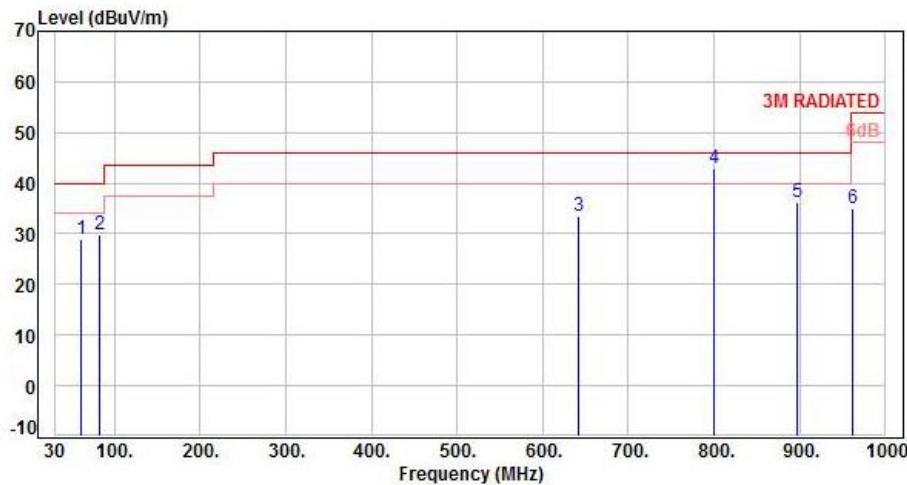

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	61.22	-11.79	40.86	29.07	40.00	-10.93	Peak	400	0	P
2	82.45	-15.24	45.12	29.88	40.00	-10.12	Peak	400	0	P
3	641.33	-1.97	35.45	33.48	46.00	-12.52	Peak	400	0	P
4	800.25	0.62	42.33	42.95	46.00	-3.05	Peak	400	0	P
5	897.25	1.85	34.46	36.31	46.00	-9.69	Peak	400	0	P
6	961.42	2.85	32.21	35.06	54.00	-18.94	Peak	400	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6. Test Result and Data (1GHz ~ 40GHz)

Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, Band 1, CH36	:	

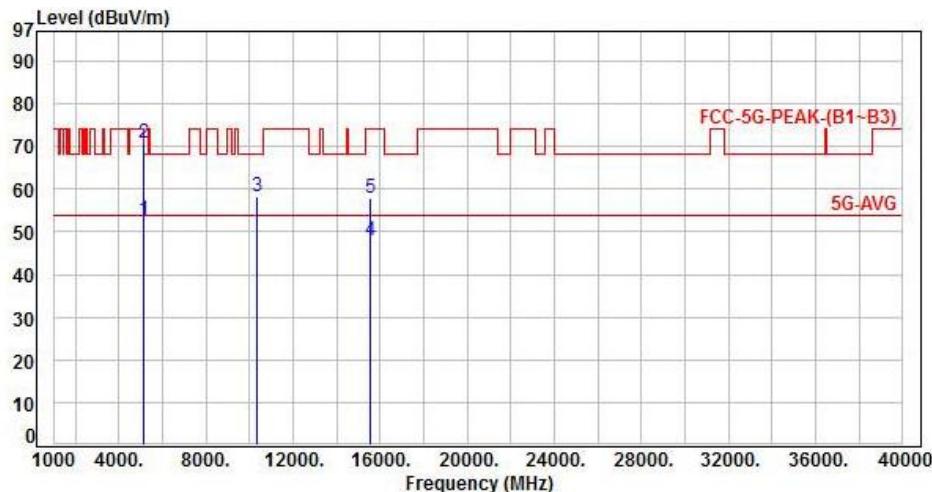

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	47.07	52.79	54.00	-1.21	Average	175	35	P
2	5150.00	5.72	65.17	70.89	74.00	-3.11	Peak	175	35	P
3	10360.00	12.85	45.30	58.15	68.20	-10.05	Peak	120	253	P
4	15540.00	15.25	32.77	48.02	54.00	-5.98	Average	155	250	P
5	15540.00	15.25	42.56	57.81	74.00	-16.19	Peak	155	250	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, Band 1, CH36	:	

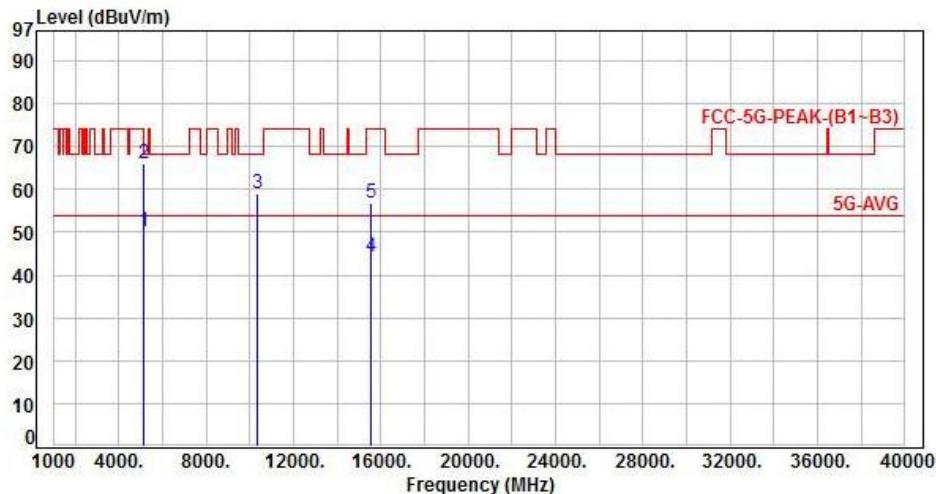

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	44.26	49.98	54.00	-4.02	Average	100	270	P
2	5150.00	5.72	60.30	66.02	74.00	-7.98	Peak	100	270	P
3	10360.00	12.85	46.30	59.15	68.20	-9.05	Peak	100	0	P
4	15540.00	15.25	28.98	44.23	54.00	-9.77	Average	100	355	P
5	15540.00	15.25	41.48	56.73	74.00	-17.27	Peak	100	355	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, Band 1, CH40	:	

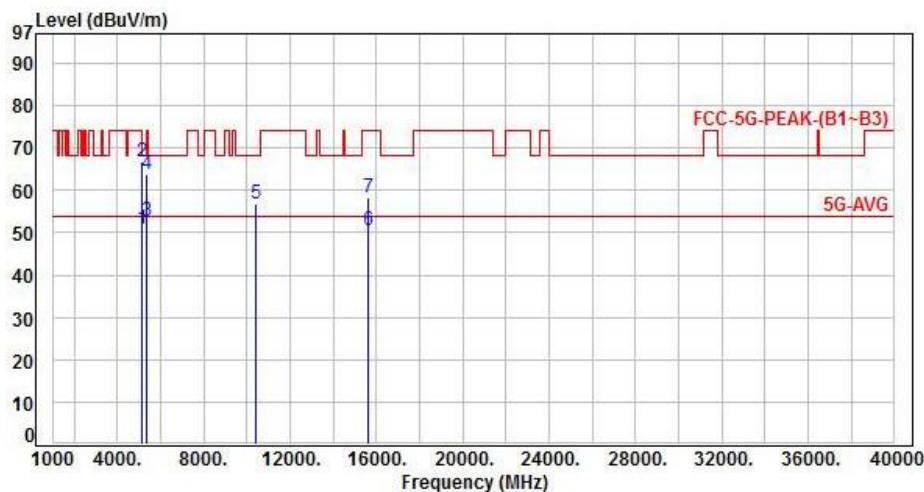

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	45.17	50.89	54.00	-3.11	Average	130	60	P
2	5150.00	5.72	61.01	66.73	74.00	-7.27	Peak	130	60	P
3	5350.00	6.12	46.62	52.74	54.00	-1.26	Average	140	240	P
4	5350.00	6.12	57.54	63.66	74.00	-10.34	Peak	140	240	P
5	10400.00	12.90	43.81	56.71	68.20	-11.49	Peak	120	245	P
6	15600.00	14.85	35.53	50.38	54.00	-3.62	Average	155	255	P
7	15600.00	14.85	43.41	58.26	74.00	-15.74	Peak	155	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, Band 1, CH40	:	

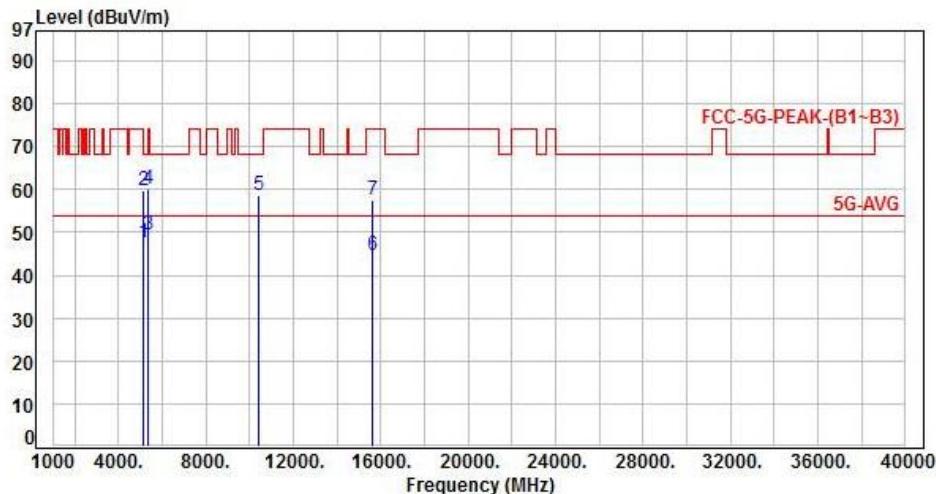

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	41.81	47.53	54.00	-6.47	Average	100	55	P
2	5150.00	5.72	54.06	59.78	74.00	-14.22	Peak	100	55	P
3	5350.00	6.12	43.24	49.36	54.00	-4.64	Average	100	55	P
4	5350.00	6.12	54.09	60.21	74.00	-13.79	Peak	100	55	P
5	10400.00	12.90	45.83	58.73	68.20	-9.47	Peak	100	0	P
6	15600.00	14.85	29.85	44.70	54.00	-9.30	Average	100	350	P
7	15600.00	14.85	42.70	57.55	74.00	-16.45	Peak	100	350	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, Band 1, CH48	:	

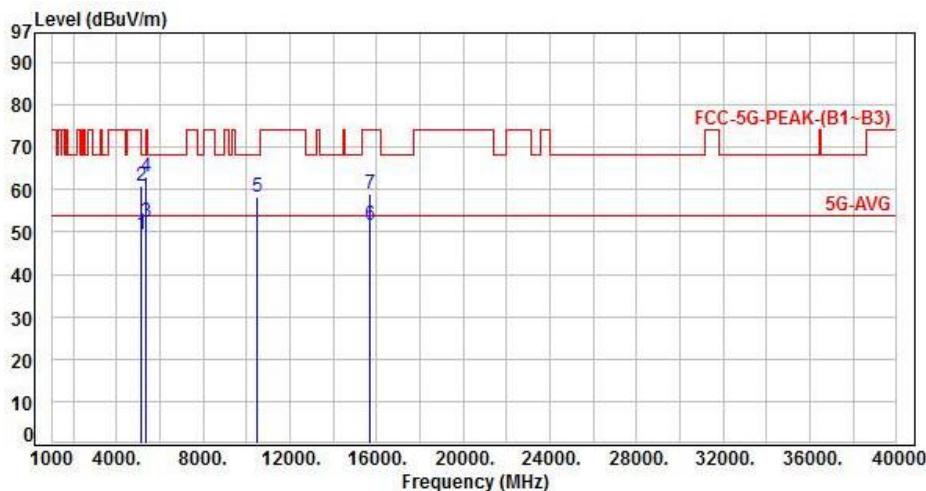

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	43.69	49.41	54.00	-4.59	Average	130	60	P
2	5150.00	5.72	54.96	60.68	74.00	-13.32	Peak	130	60	P
3	5350.00	6.12	46.11	52.23	54.00	-1.77	Average	160	245	P
4	5350.00	6.12	57.07	63.19	74.00	-10.81	Peak	160	245	P
5	10480.00	13.03	45.12	58.15	68.20	-10.05	Peak	289	250	P
6	15720.00	14.51	37.26	51.77	54.00	-2.23	Average	215	255	P
7	15720.00	14.51	44.52	59.03	74.00	-14.97	Peak	215	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, Band 1, CH48	:	

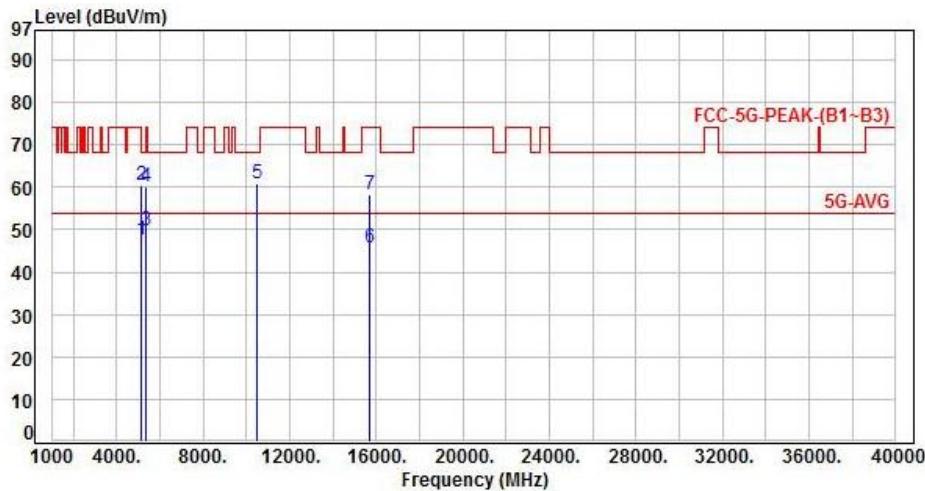

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	5150.00	5.72	41.87	47.59	54.00	-6.41	Average	100	55 P
2	5150.00	5.72	54.62	60.34	74.00	-13.66	Peak	100	55 P
3	5350.00	6.12	43.61	49.73	54.00	-4.27	Average	100	55 P
4	5350.00	6.12	54.14	60.26	74.00	-13.74	Peak	100	55 P
5	10480.00	13.03	47.84	60.87	68.20	-7.33	Peak	100	0 P
6	15720.00	14.51	31.15	45.66	54.00	-8.34	Average	100	350 P
7	15720.00	14.51	43.69	58.20	74.00	-15.80	Peak	100	350 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, Band 1, CH36	:	

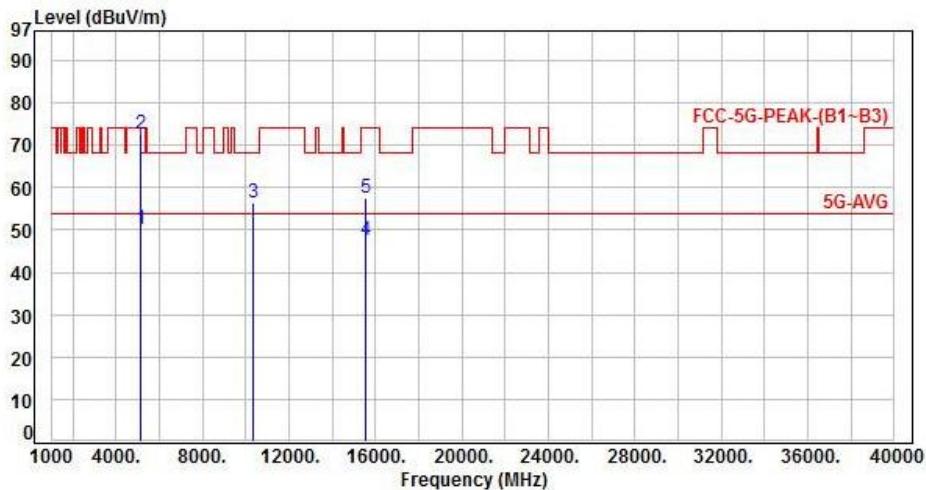

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	44.37	50.09	54.00	-3.91	Average	292	30	P
2	5150.00	5.72	66.93	72.65	74.00	-1.35	Peak	292	30	P
3	10360.00	12.85	43.49	56.34	68.20	-11.86	Peak	100	255	P
4	15540.00	15.25	32.49	47.74	54.00	-6.26	Average	145	255	P
5	15540.00	15.25	42.23	57.48	74.00	-16.52	Peak	145	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, Band 1, CH36	:	

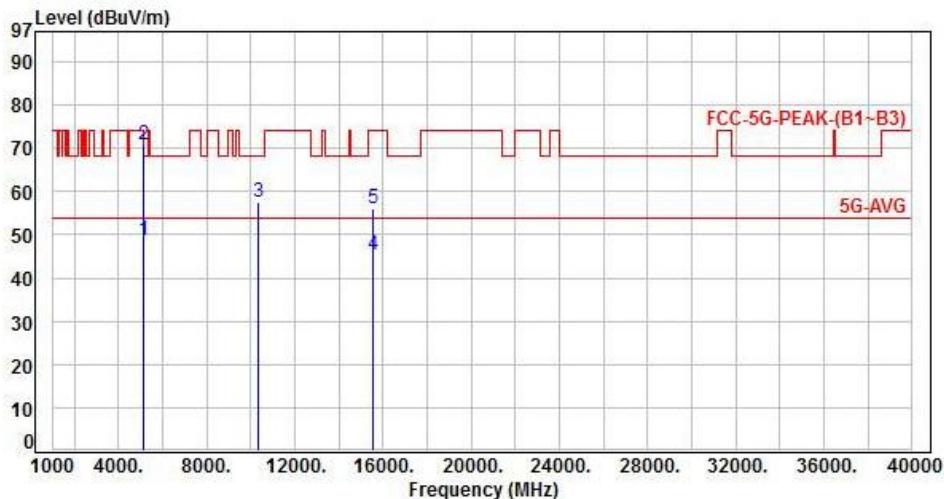

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	42.80	48.52	54.00	-5.48	Average	100	45	P
2	5150.00	5.72	65.04	70.76	74.00	-3.24	Peak	100	45	P
3	10360.00	12.85	44.84	57.69	68.20	-10.51	Peak	200	335	P
4	15540.00	15.25	30.26	45.51	54.00	-8.49	Average	140	290	P
5	15540.00	15.25	40.95	56.20	74.00	-17.80	Peak	140	290	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, Band 1, CH40	:	

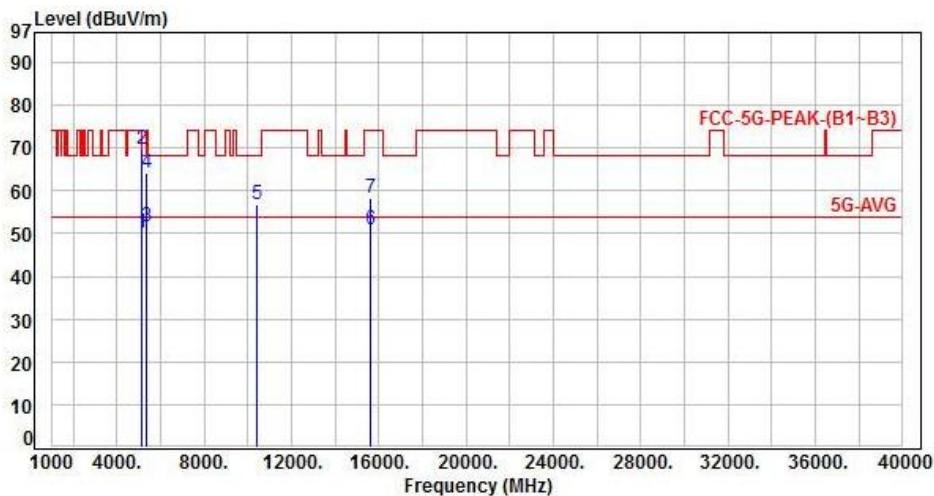

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	44.33	50.05	54.00	-3.95	Average	235	30	P
2	5150.00	5.72	64.13	69.85	74.00	-4.15	Peak	235	30	P
3	5350.00	6.12	45.46	51.58	54.00	-2.42	Average	138	300	P
4	5350.00	6.12	58.09	64.21	74.00	-9.79	Peak	138	300	P
5	10400.00	12.90	43.90	56.80	68.20	-11.40	Peak	120	245	P
6	15600.00	14.85	35.88	50.73	54.00	-3.27	Average	160	255	P
7	15600.00	14.85	43.51	58.36	74.00	-15.64	Peak	160	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, Band 1, CH40	:	

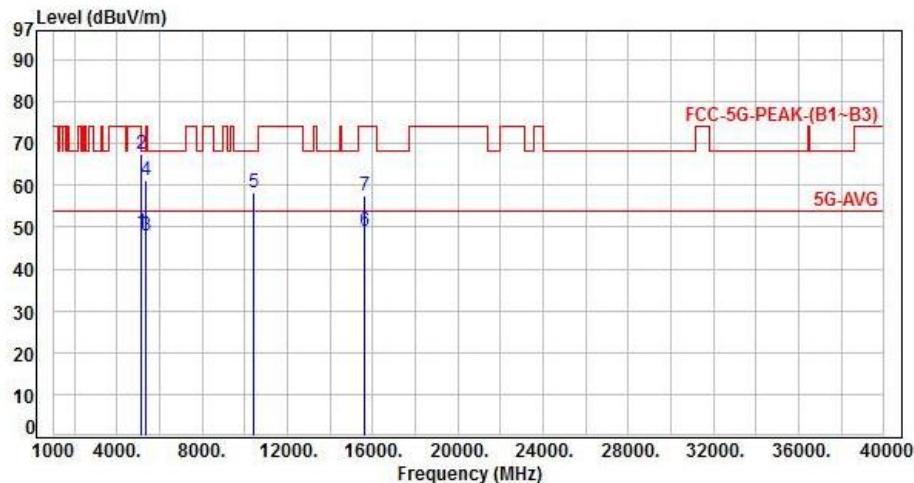

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	43.00	48.72	54.00	-5.28	Average	100	45	P
2	5150.00	5.72	61.69	67.41	74.00	-6.59	Peak	100	45	P
3	5350.00	6.12	41.87	47.99	54.00	-6.01	Average	110	50	P
4	5350.00	6.12	55.03	61.15	74.00	-12.85	Peak	110	50	P
5	10400.00	12.90	45.29	58.19	68.20	-10.01	Peak	100	350	P
6	15600.00	14.85	34.14	48.99	54.00	-5.01	Average	145	290	P
7	15600.00	14.85	42.57	57.42	74.00	-16.58	Peak	145	290	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, Band 1, CH48	:	

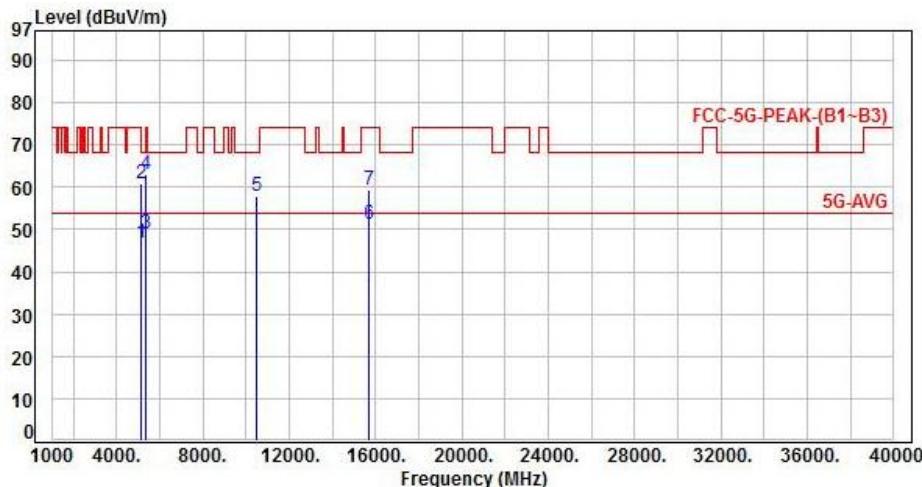

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	41.00	46.72	54.00	-7.28	Average	100	20	P
2	5150.00	5.72	55.29	61.01	74.00	-12.99	Peak	100	20	P
3	5350.00	6.12	43.03	49.15	54.00	-4.85	Average	210	295	P
4	5350.00	6.12	57.03	63.15	74.00	-10.85	Peak	210	295	P
5	10480.00	13.03	44.81	57.84	68.20	-10.36	Peak	120	245	P
6	15720.00	14.51	36.71	51.22	54.00	-2.78	Average	156	255	P
7	15720.00	14.51	44.82	59.33	74.00	-14.67	Peak	156	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, Band 1, CH48	:	

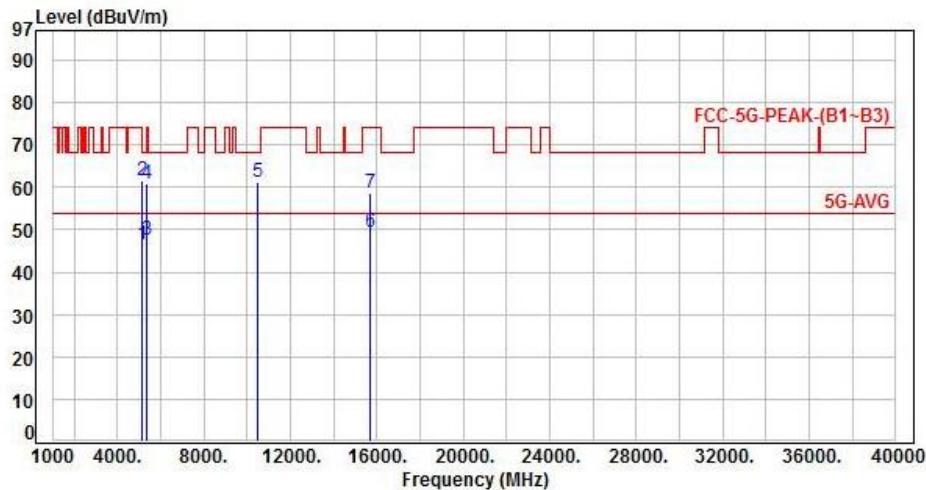

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	5150.00	5.72	40.71	46.43	54.00	-7.57	Average	100	55 P
2	5150.00	5.72	55.88	61.60	74.00	-12.40	Peak	100	55 P
3	5350.00	6.12	41.46	47.58	54.00	-6.42	Average	175	45 P
4	5350.00	6.12	54.79	60.91	74.00	-13.09	Peak	175	45 P
5	10480.00	13.03	48.16	61.19	68.20	-7.01	Peak	100	0 P
6	15720.00	14.51	34.80	49.31	54.00	-4.69	Average	145	290 P
7	15720.00	14.51	44.17	58.68	74.00	-15.32	Peak	145	290 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 5, Band 1, CH38	:	

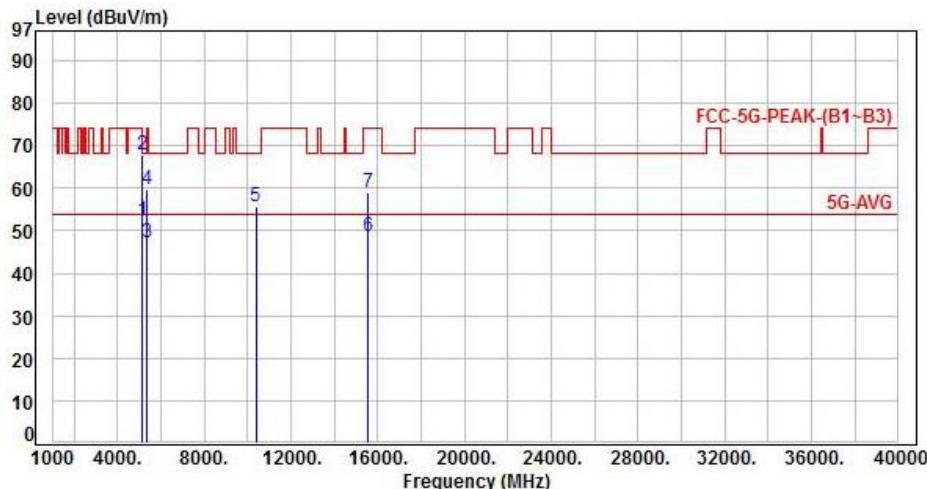

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	46.58	52.30	54.00	-1.70	Average	100	100	P
2	5150.00	5.72	62.07	67.79	74.00	-6.21	Peak	100	100	P
3	5350.00	6.12	41.25	47.37	54.00	-6.63	Average	100	100	P
4	5350.00	6.12	53.51	59.63	74.00	-14.37	Peak	100	100	P
5	10380.00	12.87	42.69	55.56	68.20	-12.64	Peak	285	245	P
6	15570.00	15.05	33.80	48.85	54.00	-5.15	Average	115	245	P
7	15570.00	15.05	43.99	59.04	74.00	-14.96	Peak	115	245	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 5, Band 1, CH38	:	

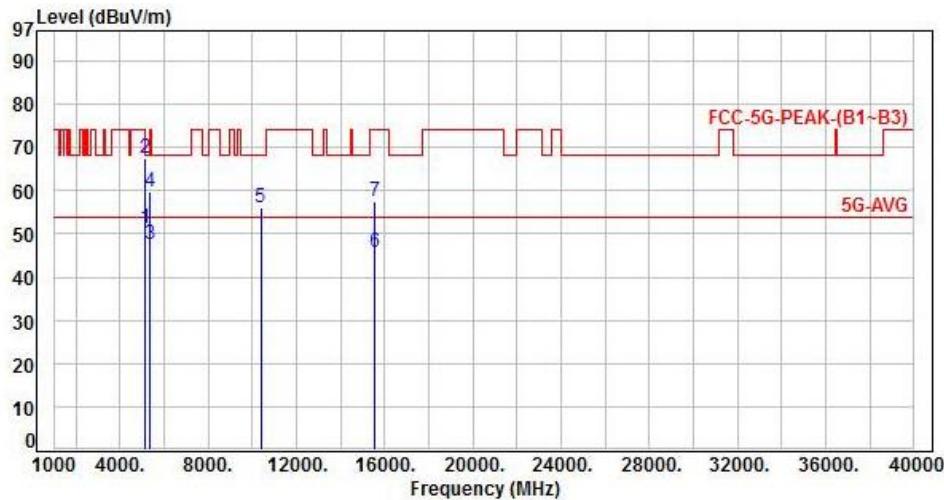

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	45.44	51.16	54.00	-2.84	Average	125	45	P
2	5150.00	5.72	61.95	67.67	74.00	-6.33	Peak	125	45	P
3	5350.00	6.12	41.46	47.58	54.00	-6.42	Average	125	45	P
4	5350.00	6.12	53.61	59.73	74.00	-14.27	Peak	125	45	P
5	10380.00	12.87	43.15	56.02	68.20	-12.18	Peak	115	0	P
6	15570.00	15.05	30.65	45.70	54.00	-8.30	Average	145	300	P
7	15570.00	15.05	42.54	57.59	74.00	-16.41	Peak	145	300	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 5, Band 1, CH46	:	

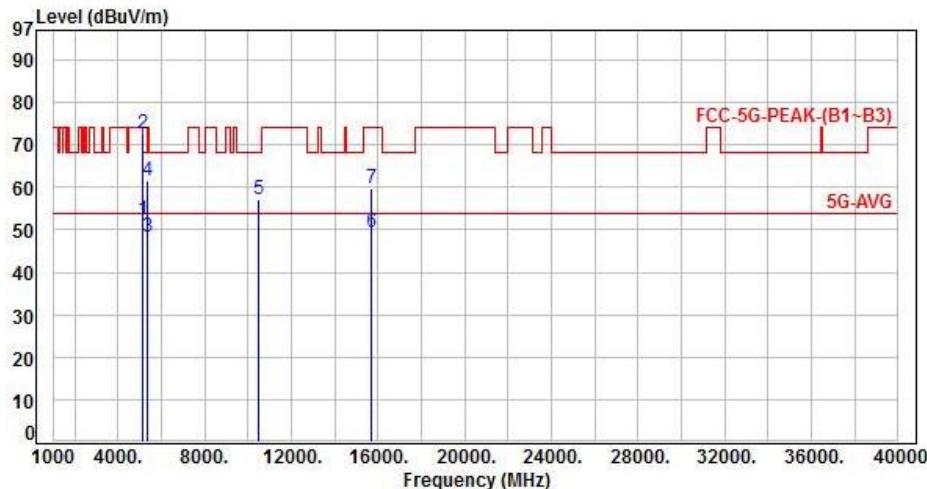

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	46.52	52.24	54.00	-1.76	Average	145	100	P
2	5150.00	5.72	66.76	72.48	74.00	-1.52	Peak	145	100	P
3	5350.00	6.12	42.11	48.23	54.00	-5.77	Average	100	295	P
4	5350.00	6.12	55.66	61.78	74.00	-12.22	Peak	100	295	P
5	10460.00	13.00	44.12	57.12	68.20	-11.08	Peak	285	245	P
6	15690.00	14.52	35.03	49.55	54.00	-4.45	Average	120	245	P
7	15690.00	14.52	45.14	59.66	74.00	-14.34	Peak	120	245	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 5, Band 1, CH46	:	

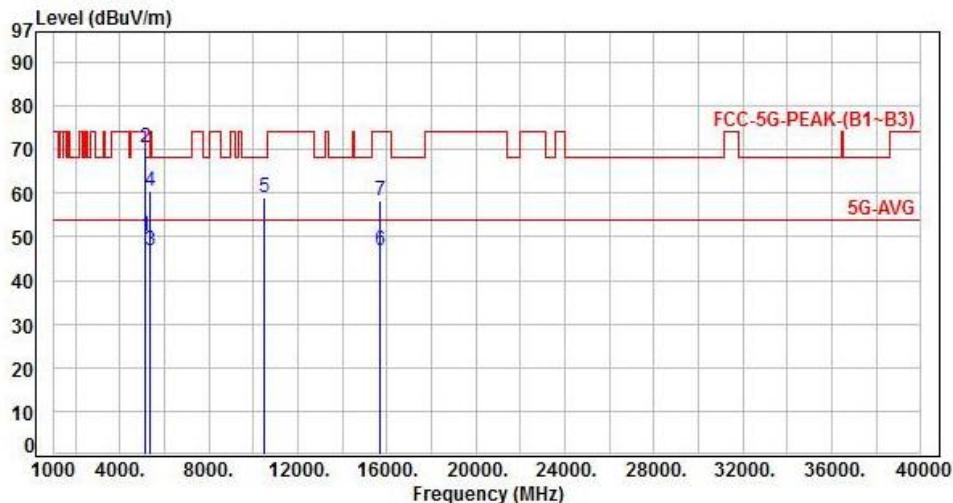


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	44.39	50.11	54.00	-3.89	Average	110	40	P
2	5150.00	5.72	64.87	70.59	74.00	-3.41	Peak	110	40	P
3	5350.00	6.12	40.60	46.72	54.00	-7.28	Average	100	63	P
4	5350.00	6.12	54.31	60.43	74.00	-13.57	Peak	100	63	P
5	10460.00	13.00	45.96	58.96	68.20	-9.24	Peak	115	0	P
6	15690.00	14.52	32.15	46.67	54.00	-7.33	Average	145	285	P
7	15690.00	14.52	43.77	58.29	74.00	-15.71	Peak	145	285	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 6, Band 1, CH42	:	

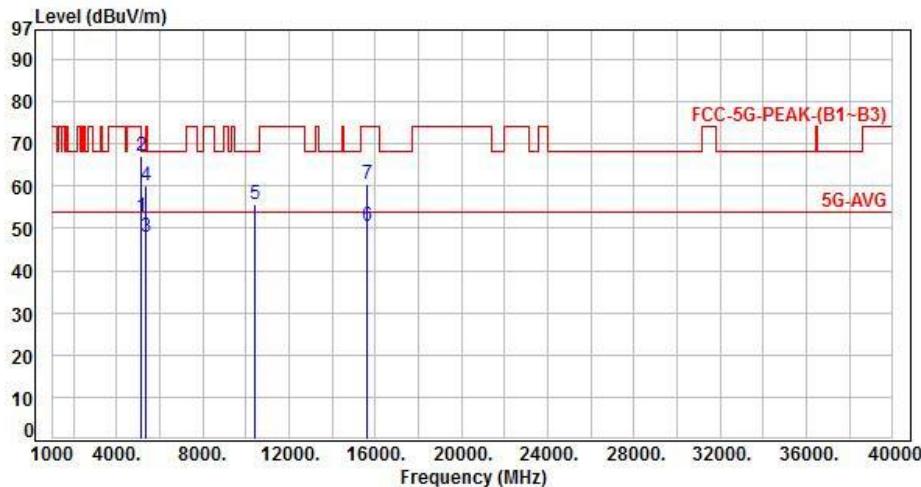

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	47.13	52.85	54.00	-1.15	Average	150	305	P
2	5150.00	5.72	61.32	67.04	74.00	-6.96	Peak	150	305	P
3	5350.00	6.12	41.86	47.98	54.00	-6.02	Average	150	305	P
4	5350.00	6.12	53.92	60.04	74.00	-13.96	Peak	150	305	P
5	10420.00	12.94	42.63	55.57	68.20	-12.63	Peak	125	255	P
6	15630.00	14.74	35.72	50.46	54.00	-3.54	Average	100	280	P
7	15630.00	14.74	45.78	60.52	74.00	-13.48	Peak	100	280	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 6, Band 1, CH42	:	

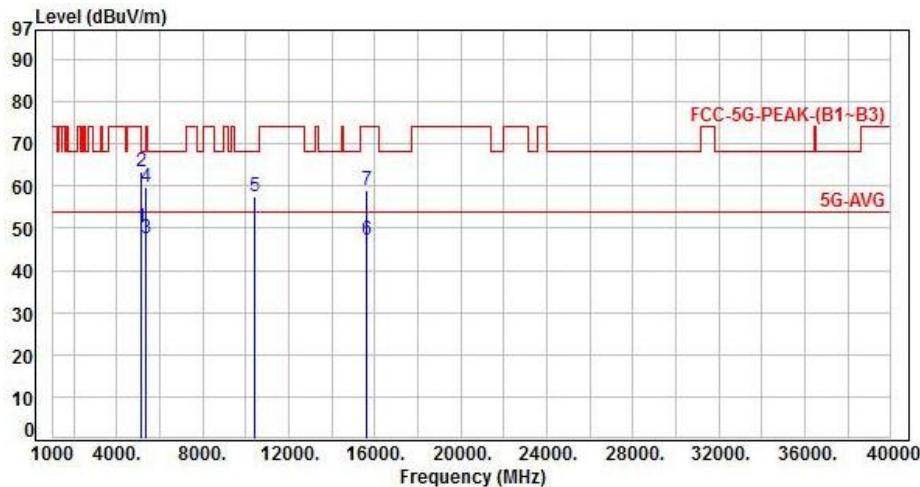

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	44.37	50.09	54.00	-3.91	Average	100	40	P
2	5150.00	5.72	57.60	63.32	74.00	-10.68	Peak	100	40	P
3	5350.00	6.12	41.46	47.58	54.00	-6.42	Average	100	40	P
4	5350.00	6.12	53.61	59.73	74.00	-14.27	Peak	100	40	P
5	10420.00	12.94	44.50	57.44	68.20	-10.76	Peak	100	5	P
6	15630.00	14.74	32.53	47.27	54.00	-6.73	Average	150	285	P
7	15630.00	14.74	44.19	58.93	74.00	-15.07	Peak	150	285	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 8, Band 1, CH36	:	

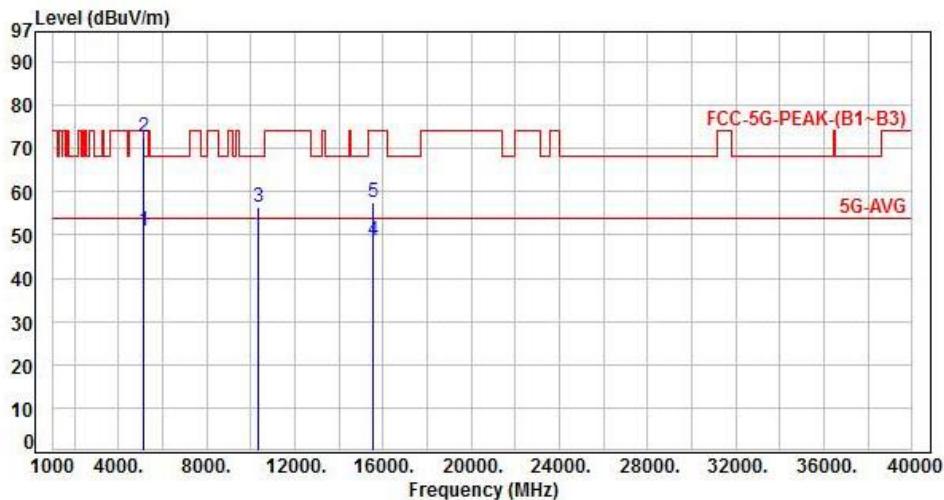

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	45.12	50.84	54.00	-3.16	Average	175	235	P
2	5150.00	5.72	66.92	72.64	74.00	-1.36	Peak	175	235	P
3	10360.00	12.85	43.49	56.34	68.20	-11.86	Peak	100	254	P
4	15540.00	15.25	33.49	48.74	54.00	-5.26	Average	145	245	P
5	15540.00	15.25	42.23	57.48	74.00	-16.52	Peak	145	245	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 8, Band 1, CH36	:	

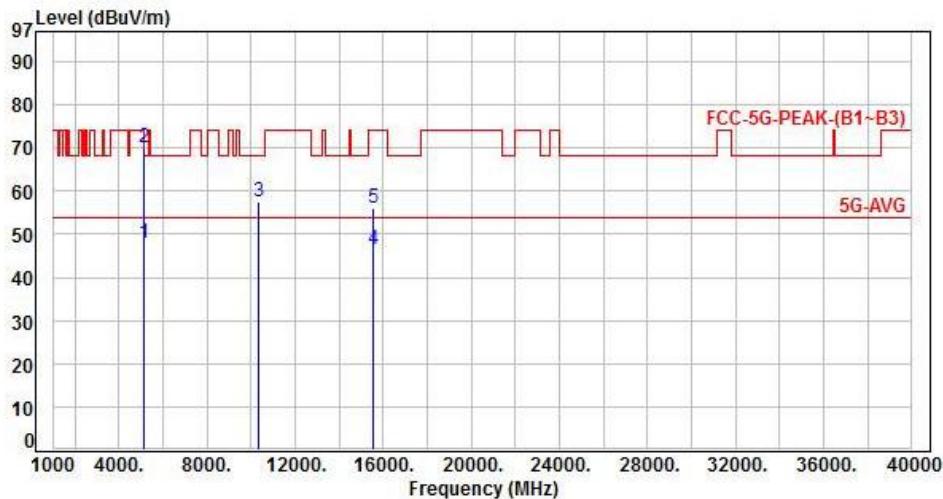

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	42.27	47.99	54.00	-6.01	Average	100	40	P
2	5150.00	5.72	64.21	69.93	74.00	-4.07	Peak	100	40	P
3	10360.00	12.85	44.84	57.69	68.20	-10.51	Peak	100	355	P
4	15540.00	15.25	31.26	46.51	54.00	-7.49	Average	140	290	P
5	15540.00	15.25	40.95	56.20	74.00	-17.80	Peak	140	290	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 8, Band 1, CH40	:	

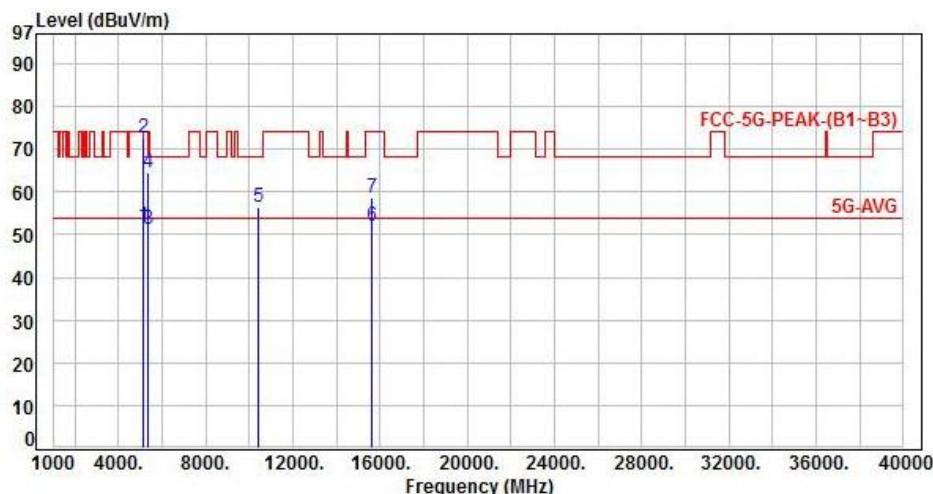

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	46.24	51.96	54.00	-2.04	Average	275	250	P
2	5150.00	5.72	66.96	72.68	74.00	-1.32	Peak	275	250	P
3	5350.00	6.12	45.02	51.14	54.00	-2.86	Average	140	300	P
4	5350.00	6.12	58.49	64.61	74.00	-9.39	Peak	140	300	P
5	18400.00	12.90	43.35	56.25	68.20	-11.95	Peak	295	245	P
6	15600.00	14.85	36.98	51.83	54.00	-2.17	Average	145	255	P
7	15600.00	14.85	43.89	58.74	74.00	-15.26	Peak	145	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 8, Band 1, CH40	:	

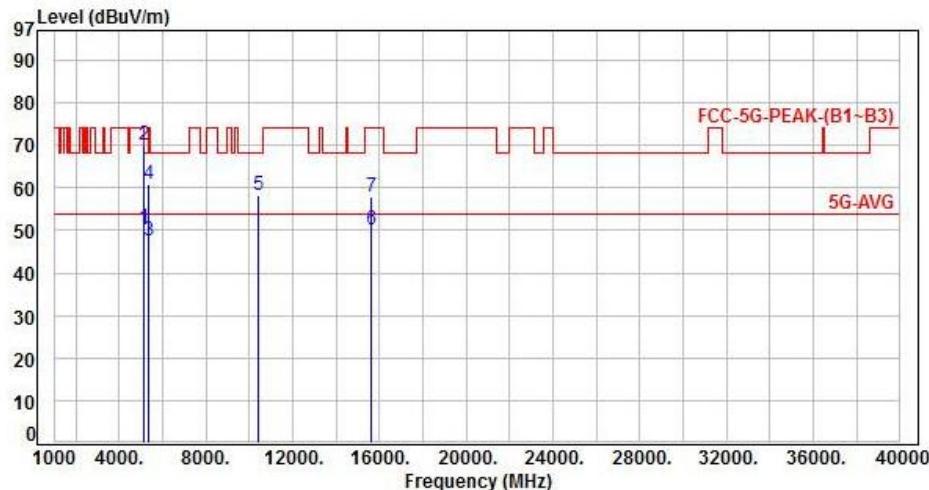

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	44.85	50.57	54.00	-3.43	Average	110	45	P
2	5150.00	5.72	64.53	70.25	74.00	-3.75	Peak	110	45	P
3	5350.00	6.12	41.37	47.49	54.00	-6.51	Average	100	50	P
4	5350.00	6.12	54.61	60.73	74.00	-13.27	Peak	100	50	P
5	10400.00	12.90	45.46	58.36	68.20	-9.84	Peak	100	360	P
6	15600.00	14.85	35.31	50.16	54.00	-3.84	Average	145	290	P
7	15600.00	14.85	42.92	57.77	74.00	-16.23	Peak	145	290	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 8, Band 1, CH48	:	

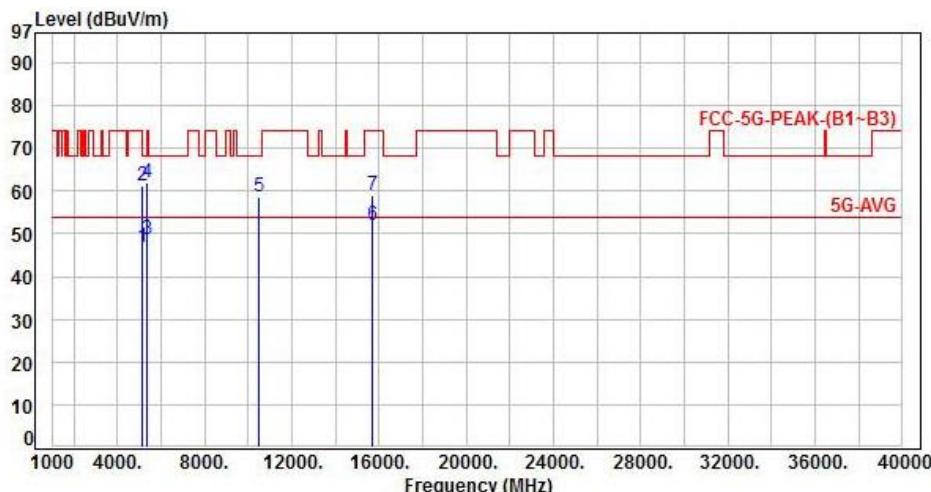

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	41.07	46.79	54.00	-7.21	Average	120	20	P
2	5150.00	5.72	55.38	61.10	74.00	-12.90	Peak	120	20	P
3	5350.00	6.12	42.53	48.65	54.00	-5.35	Average	210	295	P
4	5350.00	6.12	55.80	61.92	74.00	-12.08	Peak	210	295	P
5	10480.00	13.03	45.50	58.53	68.20	-9.67	Peak	290	250	P
6	15720.00	14.51	37.65	52.16	54.00	-1.84	Average	215	255	P
7	15720.00	14.51	44.61	59.12	74.00	-14.88	Peak	215	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 8, Band 1, CH48	:	

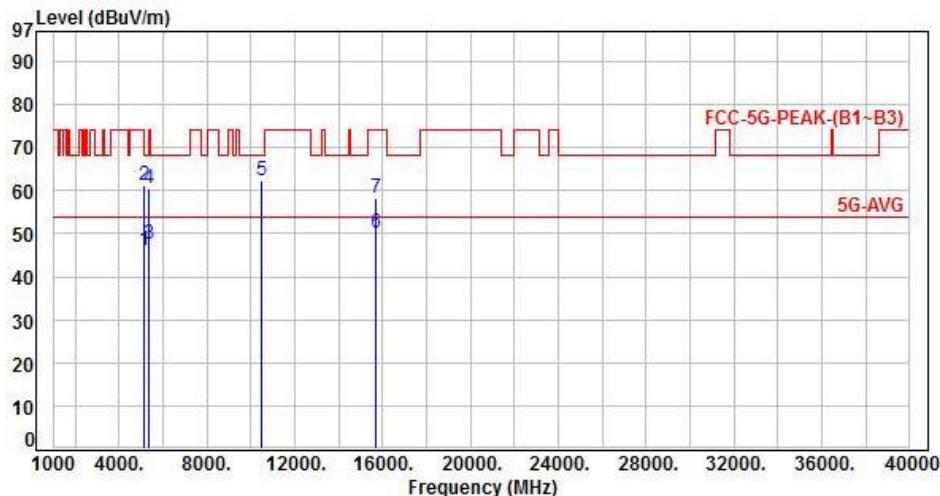

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	40.37	46.09	54.00	-7.91	Average	100	55	P
2	5150.00	5.72	55.63	61.35	74.00	-12.65	Peak	100	55	P
3	5350.00	6.12	41.34	47.46	54.00	-6.54	Average	175	45	P
4	5350.00	6.12	54.26	60.38	74.00	-13.62	Peak	175	45	P
5	10480.00	13.03	49.15	62.18	68.20	-6.02	Peak	110	0	P
6	15720.00	14.51	35.80	50.31	54.00	-3.69	Average	100	350	P
7	15720.00	14.51	43.63	58.14	74.00	-15.86	Peak	100	350	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 9, Band 1, CH38	:	

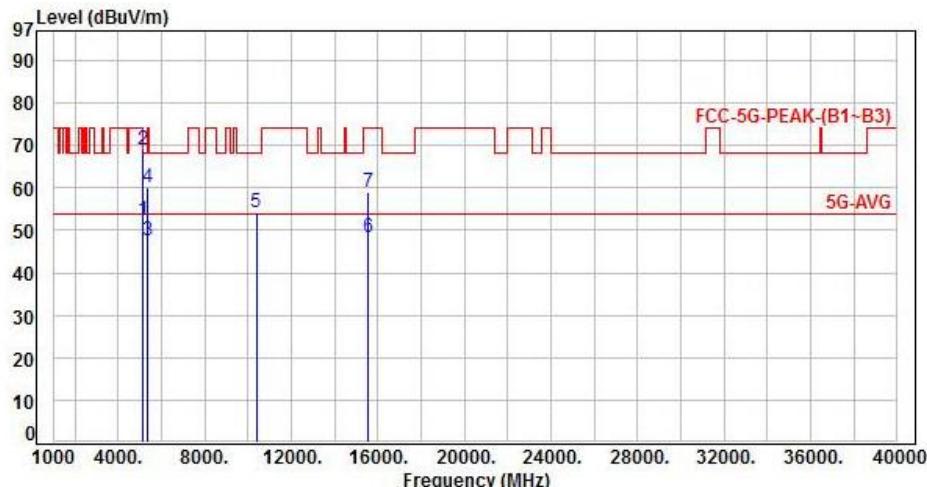

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	46.53	52.25	54.00	-1.75	Average	100	100	P
2	5150.00	5.72	63.22	68.94	74.00	-5.06	Peak	100	100	P
3	5350.00	6.12	41.37	47.49	54.00	-6.51	Average	100	100	P
4	5350.00	6.12	54.18	60.30	74.00	-13.70	Peak	100	100	P
5	10380.00	12.87	41.38	54.25	68.20	-13.95	Peak	280	245	P
6	15570.00	15.05	33.44	48.49	54.00	-5.51	Average	150	250	P
7	15570.00	15.05	43.84	58.89	74.00	-15.11	Peak	150	250	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 9, Band 1, CH38	:	

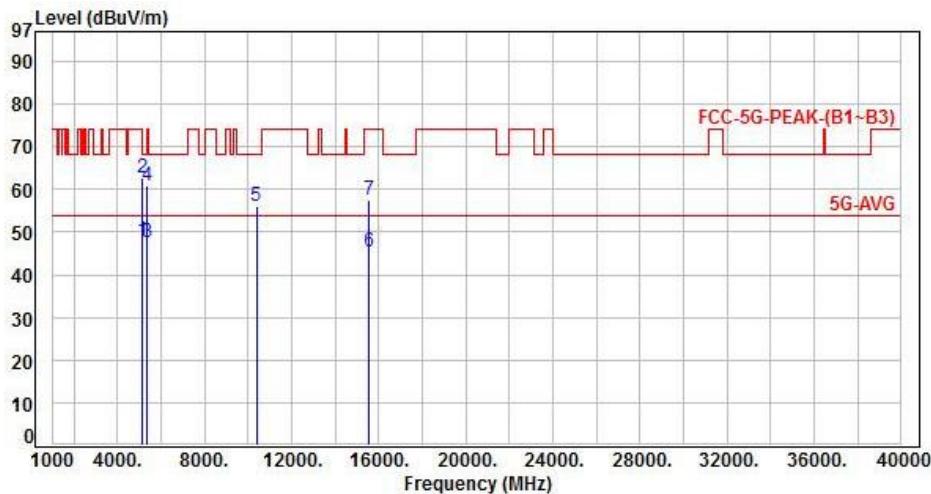

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	42.25	47.97	54.00	-6.03	Average	100	30	P
2	5150.00	5.72	57.07	62.79	74.00	-11.21	Peak	100	30	P
3	5350.00	6.12	41.46	47.58	54.00	-6.42	Average	100	30	P
4	5350.00	6.12	54.61	60.73	74.00	-13.27	Peak	100	30	P
5	10380.00	12.87	43.23	56.10	68.20	-12.10	Peak	115	0	P
6	15570.00	15.05	30.47	45.52	54.00	-8.48	Average	145	295	P
7	15570.00	15.05	42.37	57.42	74.00	-16.58	Peak	145	295	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 9, Band 1, CH46	:	

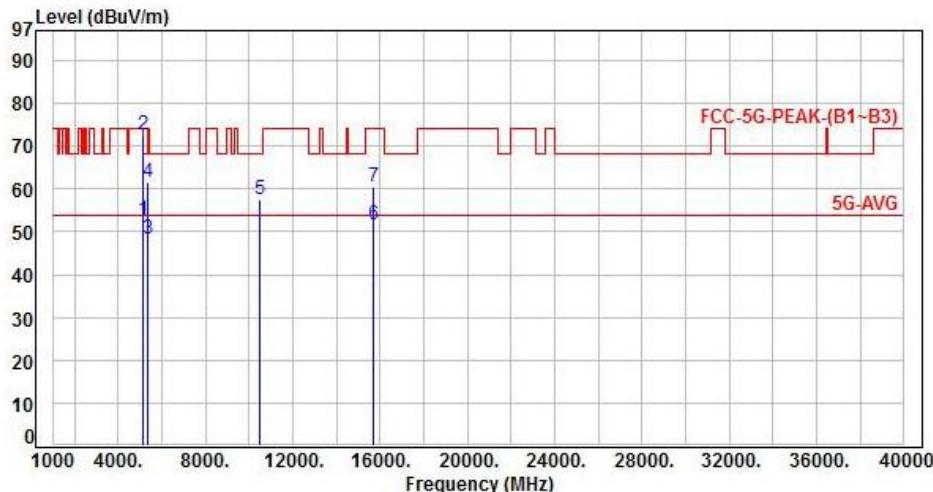

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	46.88	52.60	54.00	-1.40	Average	140	100	P
2	5150.00	5.72	66.98	72.70	74.00	-1.30	Peak	140	100	P
3	5350.00	6.12	42.19	48.31	54.00	-5.69	Average	100	295	P
4	5350.00	6.12	55.48	61.60	74.00	-12.40	Peak	100	295	P
5	10460.00	13.00	44.40	57.40	68.20	-10.80	Peak	280	245	P
6	15690.00	14.52	37.13	51.65	54.00	-2.35	Average	120	250	P
7	15690.00	14.52	46.14	60.66	74.00	-13.34	Peak	120	250	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 9, Band 1, CH46	:	

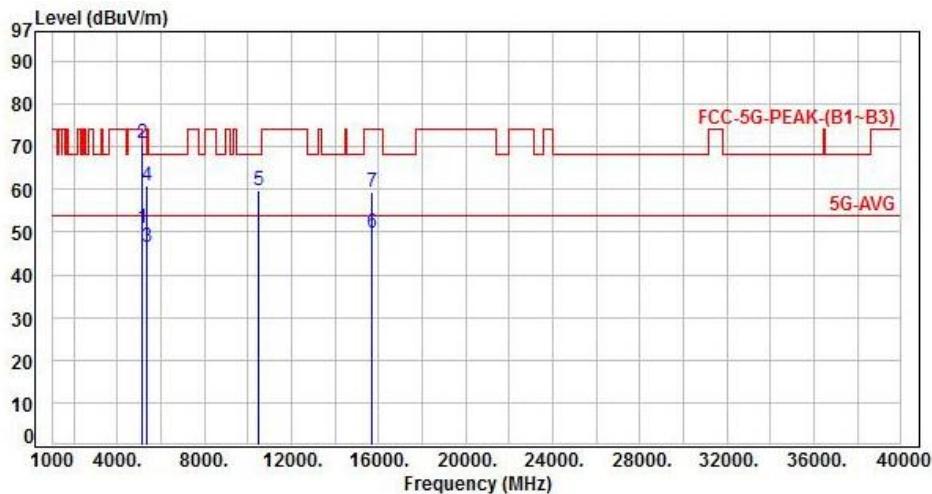

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	45.11	50.83	54.00	-3.17	Average	110	40	P
2	5150.00	5.72	65.07	70.79	74.00	-3.21	Peak	110	40	P
3	5350.00	6.12	40.34	46.46	54.00	-7.54	Average	100	63	P
4	5350.00	6.12	54.68	60.80	74.00	-13.20	Peak	100	63	P
5	10460.00	13.00	46.82	59.82	68.20	-8.38	Peak	100	0	P
6	15690.00	14.52	35.38	49.90	54.00	-4.10	Average	100	283	P
7	15690.00	14.52	44.77	59.29	74.00	-14.71	Peak	100	283	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 10, Band 1, CH42	:	

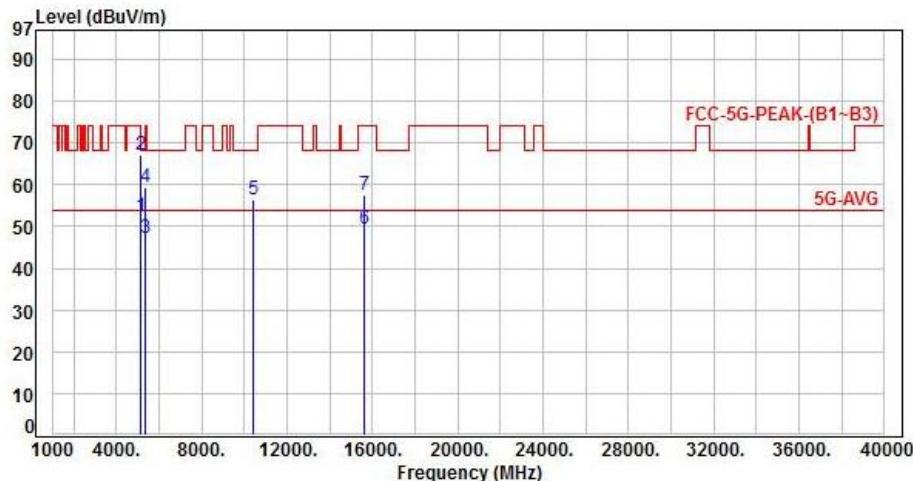

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	46.49	52.21	54.00	-1.79	Average	200	235	P
2	5150.00	5.72	61.32	67.04	74.00	-6.96	Peak	200	240	P
3	5350.00	6.12	41.04	47.16	54.00	-6.84	Average	200	245	P
4	5350.00	6.12	53.31	59.43	74.00	-14.57	Peak	200	245	P
5	10420.00	12.94	43.63	56.57	68.20	-11.63	Peak	125	255	P
6	15630.00	14.74	34.72	49.46	54.00	-4.54	Average	100	280	P
7	15630.00	14.74	42.78	57.52	74.00	-16.48	Peak	100	280	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 10, Band 1, CH42	:	

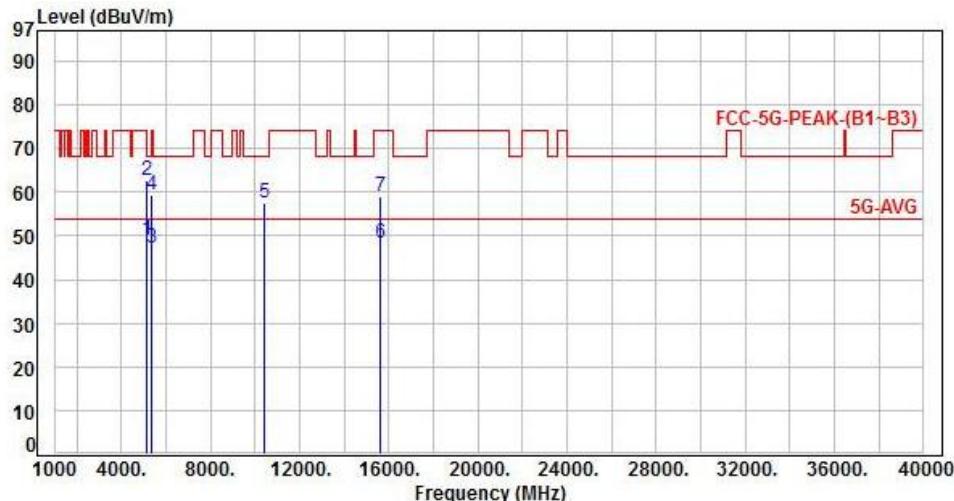

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	43.45	49.17	54.00	-4.83	Average	125	40	P
2	5150.00	5.72	56.84	62.56	74.00	-11.44	Peak	125	40	P
3	5350.00	6.12	40.98	47.10	54.00	-6.90	Average	125	40	P
4	5350.00	6.12	53.29	59.41	74.00	-14.59	Peak	125	40	P
5	10420.00	12.94	44.50	57.44	68.20	-10.76	Peak	100	5	P
6	15630.00	14.74	33.53	48.27	54.00	-5.73	Average	150	285	P
7	15630.00	14.74	44.19	58.93	74.00	-15.07	Peak	150	285	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, Band 2, CH52	:	

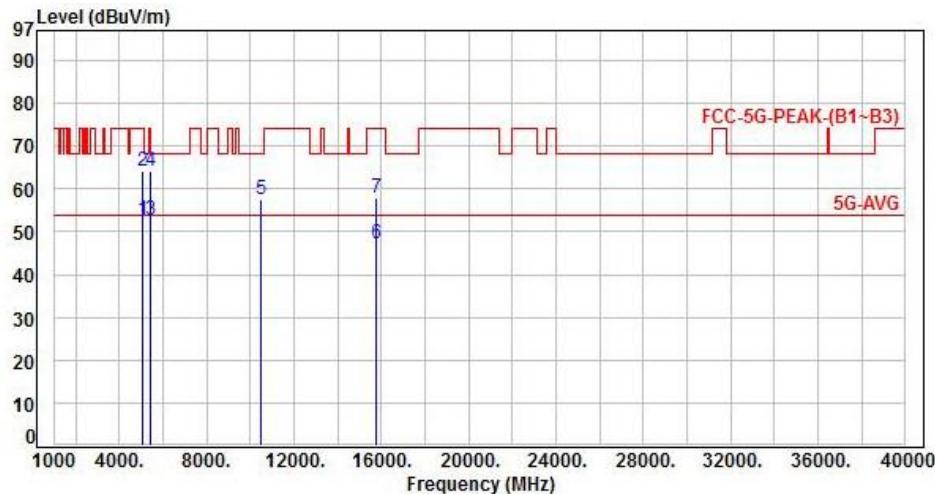

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5100.00	5.58	47.28	52.86	54.00	-1.14	Average	210	240	P
2	5100.00	5.58	58.61	64.19	74.00	-9.81	Peak	210	240	P
3	5420.00	6.23	46.57	52.80	54.00	-1.20	Average	215	245	P
4	5420.00	6.23	57.82	64.05	74.00	-9.95	Peak	215	245	P
5	10520.00	13.12	44.55	57.67	68.20	-10.53	Peak	320	280	P
6	15780.00	14.59	32.45	47.04	54.00	-6.96	Average	100	248	P
7	15780.00	14.59	43.37	57.96	74.00	-16.04	Peak	100	248	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, Band 2, CH52	:	

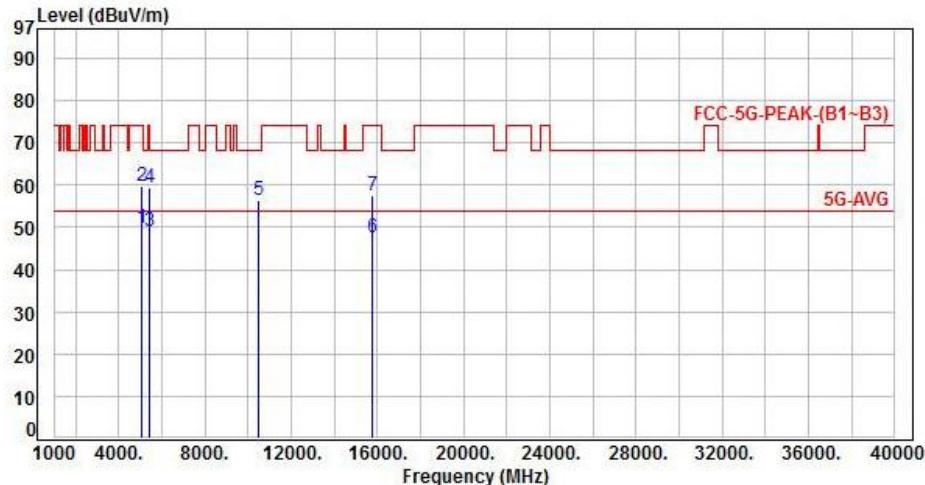

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)	P
1	5100.00	5.58	44.30	49.88	54.00	-4.12	Average	100	50	P
2	5100.00	5.58	54.31	59.89	74.00	-14.11	Peak	100	50	P
3	5420.00	6.23	42.83	49.06	54.00	-4.94	Average	100	50	P
4	5420.00	6.23	53.10	59.33	74.00	-14.67	Peak	100	50	P
5	10520.00	13.12	43.22	56.34	68.20	-11.86	Peak	100	134	P
6	15780.00	14.59	32.94	47.53	54.00	-6.47	Average	100	54	P
7	15780.00	14.59	42.89	57.48	74.00	-16.52	Peak	100	54	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, Band 2, CH60	:	

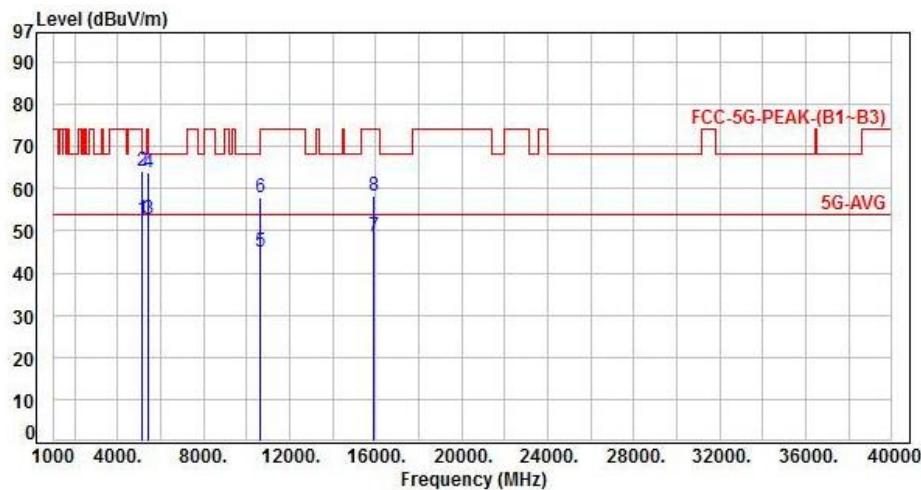

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.00	5.69	47.20	52.89	54.00	-1.11	Average	180	25	P
2	5140.00	5.69	58.61	64.30	74.00	-9.70	Peak	180	25	P
3	5460.00	6.32	46.51	52.83	54.00	-1.17	Average	215	240	P
4	5460.00	6.32	57.33	63.65	74.00	-10.35	Peak	215	240	P
5	10600.00	13.37	31.46	44.83	54.00	-9.17	Average	305	287	P
6	10600.00	13.37	44.54	57.91	74.00	-16.09	Peak	305	287	P
7	15900.00	14.35	34.52	48.87	54.00	-5.13	Average	100	157	P
8	15900.00	14.35	44.09	58.44	74.00	-15.56	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, Band 2, CH60	:	

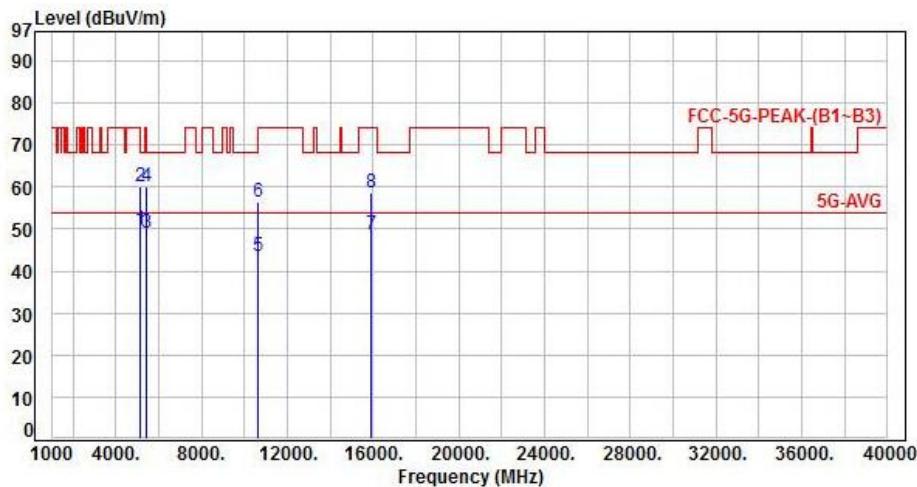

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.00	5.69	43.92	49.61	54.00	-4.39	Average	190	310	P
2	5140.00	5.69	54.46	60.15	74.00	-13.85	Peak	190	310	P
3	5460.00	6.32	42.83	49.15	54.00	-4.85	Average	100	55	P
4	5460.00	6.32	53.85	60.17	74.00	-13.83	Peak	100	55	P
5	10600.00	13.37	30.25	43.62	54.00	-10.38	Average	100	145	P
6	10600.00	13.37	43.14	56.51	74.00	-17.49	Peak	100	145	P
7	15900.00	14.35	34.27	48.62	54.00	-5.38	Average	100	53	P
8	15900.00	14.35	44.12	58.47	74.00	-15.53	Peak	100	53	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, Band 2, CH64	:	

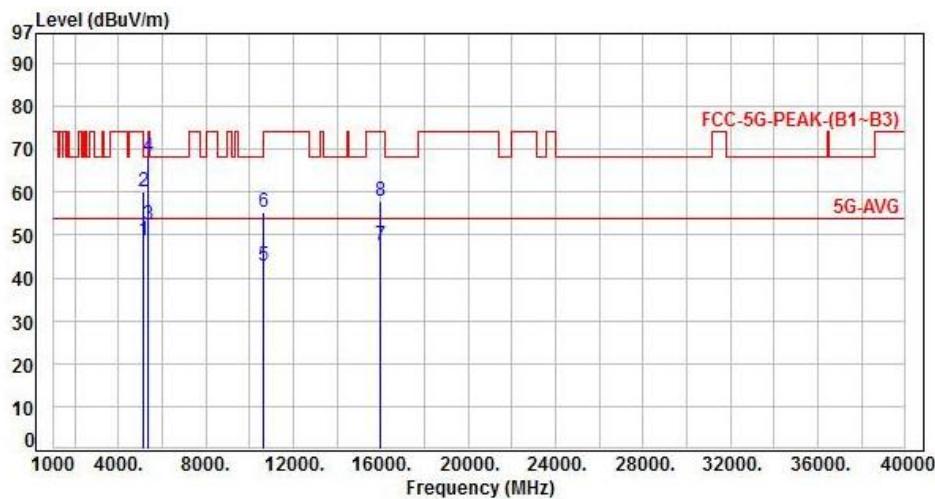

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	43.22	48.86	54.00	-5.14	Average	100	290	P
2	5120.00	5.64	54.31	59.95	74.00	-14.05	Peak	100	290	P
3	5350.00	6.12	46.19	52.31	54.00	-1.69	Average	210	60	P
4	5350.00	6.12	62.01	68.13	74.00	-5.87	Peak	210	60	P
5	10640.00	13.38	29.53	42.91	54.00	-11.09	Average	310	299	P
6	10640.00	13.38	41.84	55.22	74.00	-18.78	Peak	310	299	P
7	15960.00	14.25	33.33	47.58	54.00	-6.42	Average	100	166	P
8	15960.00	14.25	43.76	58.01	74.00	-15.99	Peak	100	166	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, Band 2, CH64	:	

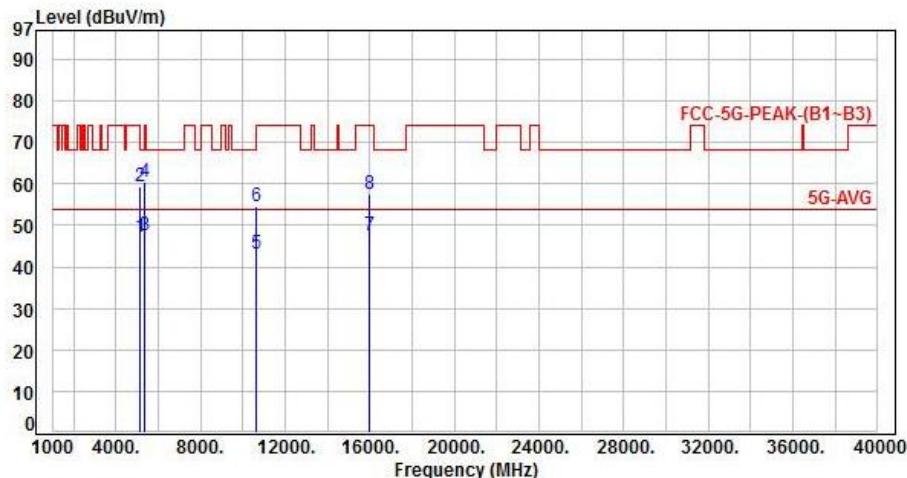

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	41.71	47.35	54.00	-6.65	Average	100	50	P
2	5120.00	5.64	53.73	59.37	74.00	-14.63	Peak	100	50	P
3	5350.00	6.12	41.33	47.45	54.00	-6.55	Average	100	50	P
4	5350.00	6.12	54.35	60.47	74.00	-13.53	Peak	100	50	P
5	10640.00	13.38	29.83	43.21	54.00	-10.79	Average	100	144	P
6	10640.00	13.38	41.25	54.63	74.00	-19.37	Peak	100	144	P
7	15960.00	14.25	33.16	47.41	54.00	-6.59	Average	100	57	P
8	15960.00	14.25	43.31	57.56	74.00	-16.44	Peak	100	57	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, Band 2, CH52	:	

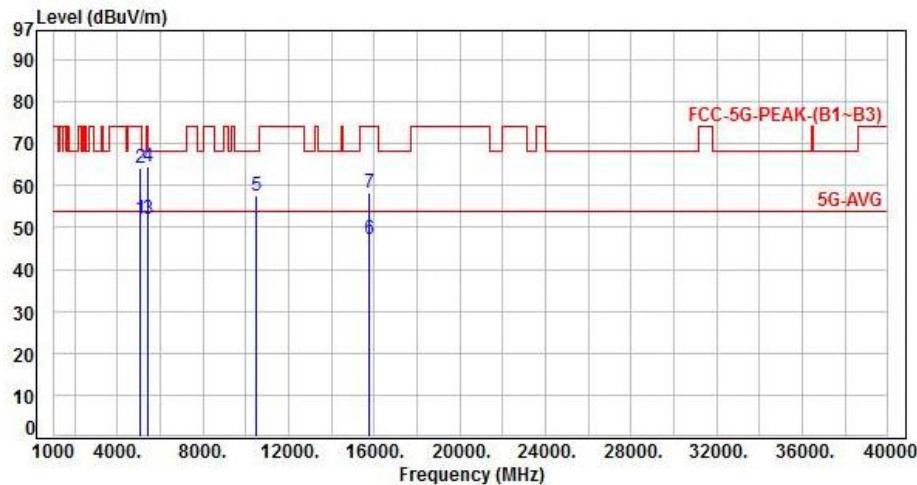

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	5100.00	5.58	46.45	52.03	54.00	-1.97	Average	227	35 P
2	5100.00	5.58	58.47	64.05	74.00	-9.95	Peak	227	35 P
3	5420.00	6.23	45.69	51.92	54.00	-2.08	Average	205	240 P
4	5420.00	6.23	58.33	64.56	74.00	-9.44	Peak	205	240 P
5	10520.00	13.12	44.31	57.43	68.20	-10.77	Peak	323	300 P
6	15780.00	14.59	32.76	47.35	54.00	-6.65	Average	120	255 P
7	15780.00	14.59	43.86	58.45	74.00	-15.55	Peak	120	255 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, Band 2, CH52	:	

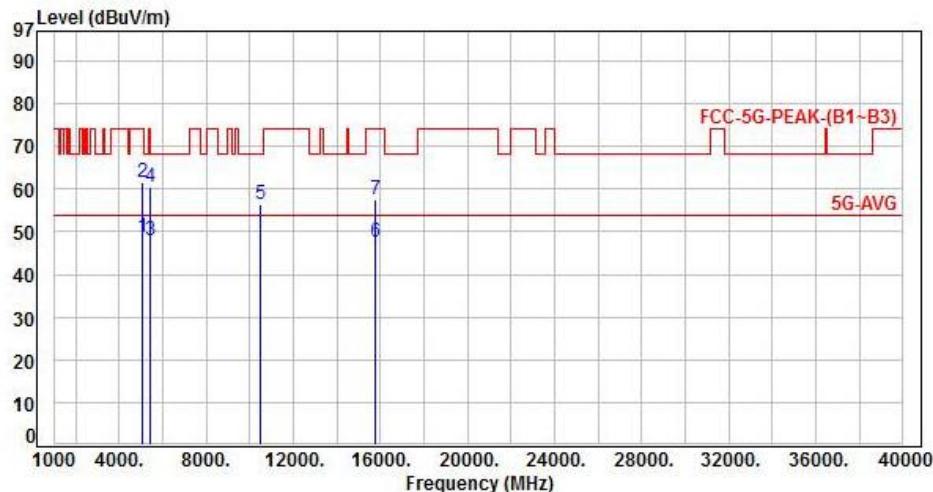

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	5100.00	5.58	43.16	48.74	54.00	-5.26	Average	210	45 P
2	5100.00	5.58	56.00	61.58	74.00	-12.42	Peak	210	45 P
3	5420.00	6.23	41.83	48.06	54.00	-5.94	Average	100	40 P
4	5420.00	6.23	54.19	60.42	74.00	-13.58	Peak	100	40 P
5	10520.00	13.12	43.46	56.58	68.20	-11.62	Peak	100	128 P
6	15780.00	14.59	33.12	47.71	54.00	-6.29	Average	100	50 P
7	15780.00	14.59	43.05	57.64	74.00	-16.36	Peak	100	50 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, Band 2, CH60	:	

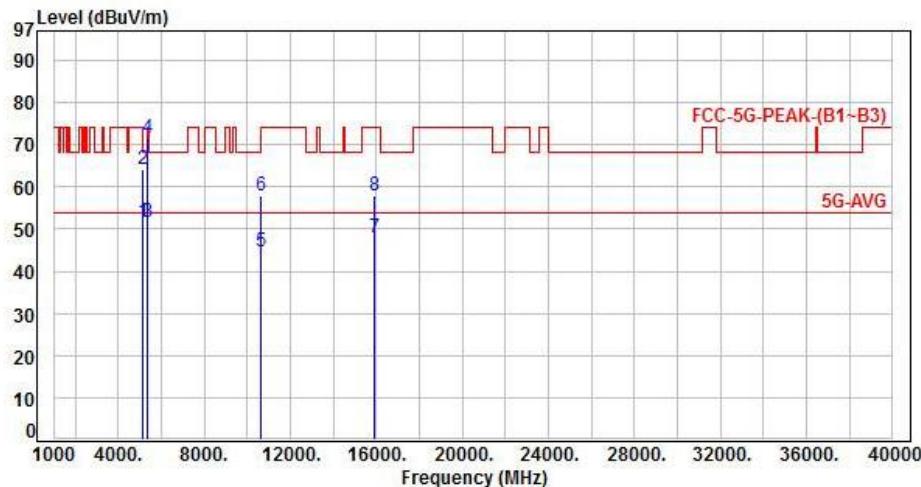

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.00	5.69	46.05	51.74	54.00	-2.26	Average	225	45	P
2	5140.00	5.69	58.63	64.32	74.00	-9.68	Peak	225	45	P
3	5350.00	6.12	45.47	51.59	54.00	-2.41	Average	215	235	P
4	5350.00	6.12	65.52	71.64	74.00	-2.36	Peak	215	235	P
5	10600.00	13.37	31.20	44.57	54.00	-9.43	Average	320	290	P
6	10600.00	13.37	44.70	58.07	74.00	-15.93	Peak	320	290	P
7	15900.00	14.35	33.71	48.06	54.00	-5.94	Average	100	250	P
8	15900.00	14.35	43.73	58.08	74.00	-15.92	Peak	100	250	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, Band 2, CH60	:	

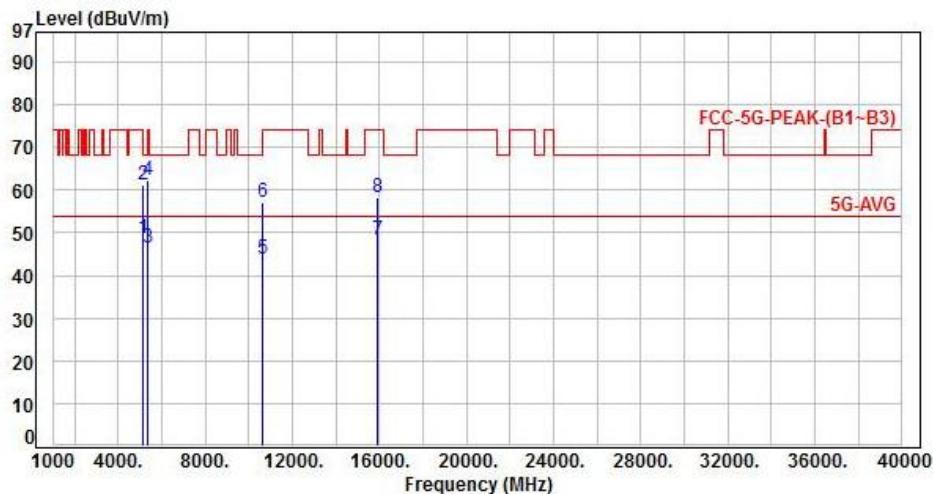

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.00	5.69	42.96	48.65	54.00	-5.35	Average	210	45	P
2	5140.00	5.69	55.68	61.37	74.00	-12.63	Peak	210	45	P
3	5350.00	6.12	40.22	46.34	54.00	-7.66	Average	100	35	P
4	5350.00	6.12	56.16	62.28	74.00	-11.72	Peak	100	35	P
5	10600.00	13.37	30.42	43.79	54.00	-10.21	Average	100	142	P
6	10600.00	13.37	43.76	57.13	74.00	-16.87	Peak	100	142	P
7	15900.00	14.35	34.15	48.50	54.00	-5.50	Average	100	47	P
8	15900.00	14.35	44.06	58.41	74.00	-15.59	Peak	100	47	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, Band 2, CH64	:	

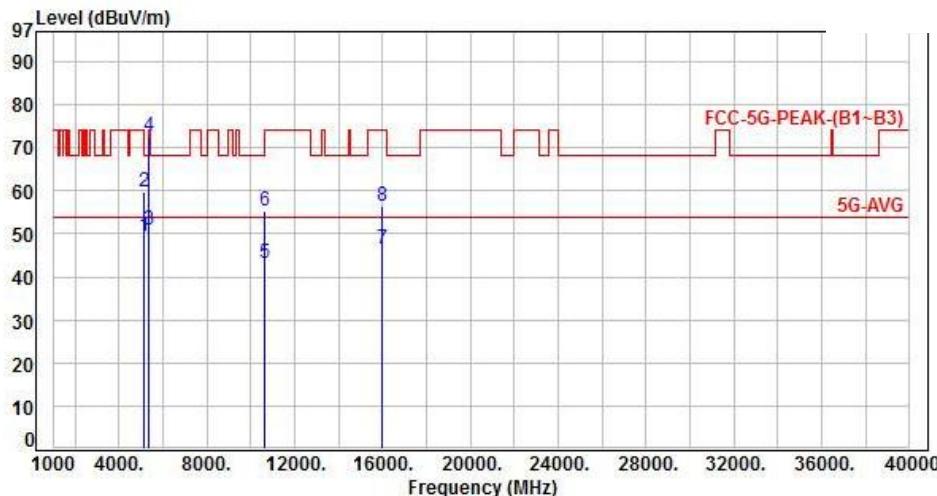

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	43.78	49.42	54.00	-4.58	Average	165	220	P
2	5120.00	5.64	54.27	59.91	74.00	-14.09	Peak	165	220	P
3	5350.00	6.12	44.62	50.74	54.00	-3.26	Average	155	240	P
4	5350.00	6.12	66.47	72.59	74.00	-1.41	Peak	155	240	P
5	10640.00	13.38	29.63	43.01	54.00	-10.99	Average	315	298	P
6	10640.00	13.38	41.76	55.14	74.00	-18.86	Peak	315	298	P
7	15960.00	14.25	32.17	46.42	54.00	-7.58	Average	100	158	P
8	15960.00	14.25	42.19	56.44	74.00	-17.56	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, Band 2, CH64	:	

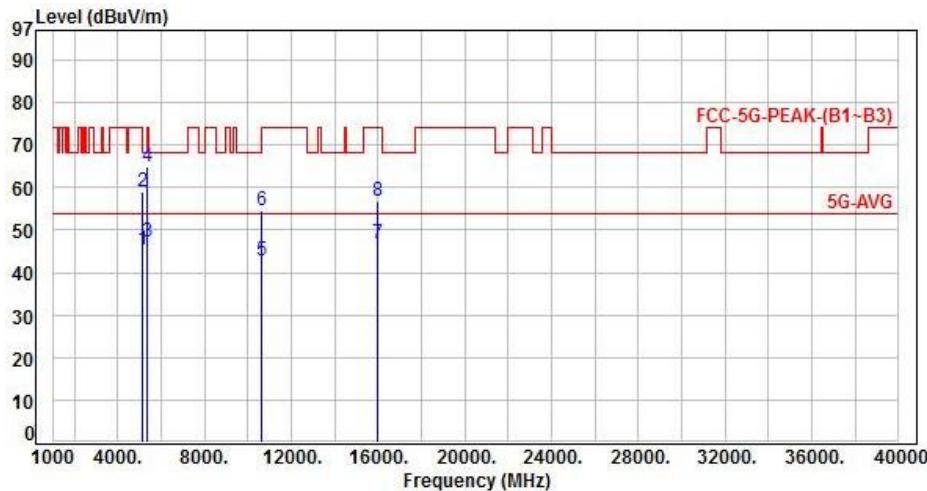

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	39.84	45.48	54.00	-8.52	Average	100	130	P
2	5120.00	5.64	53.55	59.19	74.00	-14.81	Peak	100	130	P
3	5350.00	6.12	41.25	47.37	54.00	-6.63	Average	100	40	P
4	5350.00	6.12	58.92	65.04	74.00	-8.96	Peak	100	40	P
5	10640.00	13.38	29.44	42.82	54.00	-11.18	Average	100	138	P
6	10640.00	13.38	41.30	54.68	74.00	-19.32	Peak	100	138	P
7	15960.00	14.25	32.45	46.70	54.00	-7.30	Average	100	57	P
8	15960.00	14.25	42.58	56.83	74.00	-17.17	Peak	100	57	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 5, Band 2, CH54	:	

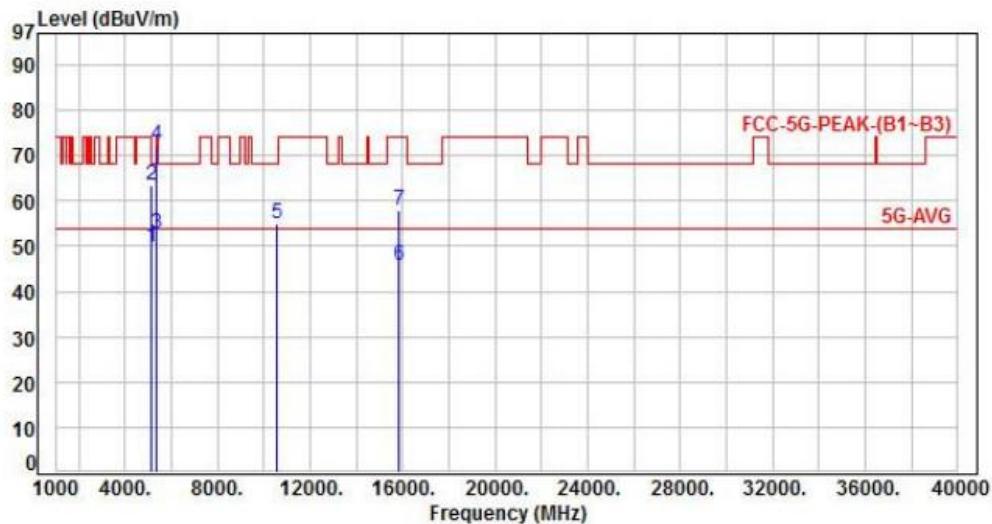

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)	P
1	5110.00	5.61	44.27	49.88	54.00	-4.12	Average	220	30	P
2	5110.00	5.61	57.95	63.56	74.00	-10.44	Peak	220	30	P
3	5350.00	6.12	46.49	52.61	54.00	-1.39	Average	165	238	P
4	5350.00	6.12	66.31	72.43	74.00	-1.57	Peak	165	238	P
5	10540.00	13.18	41.78	54.96	68.20	-13.24	Peak	313	295	P
6	15810.00	14.59	31.14	45.73	54.00	-8.27	Average	100	253	P
7	15810.00	14.59	43.26	57.85	74.00	-16.15	Peak	100	253	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 5, Band 2, CH54	:	

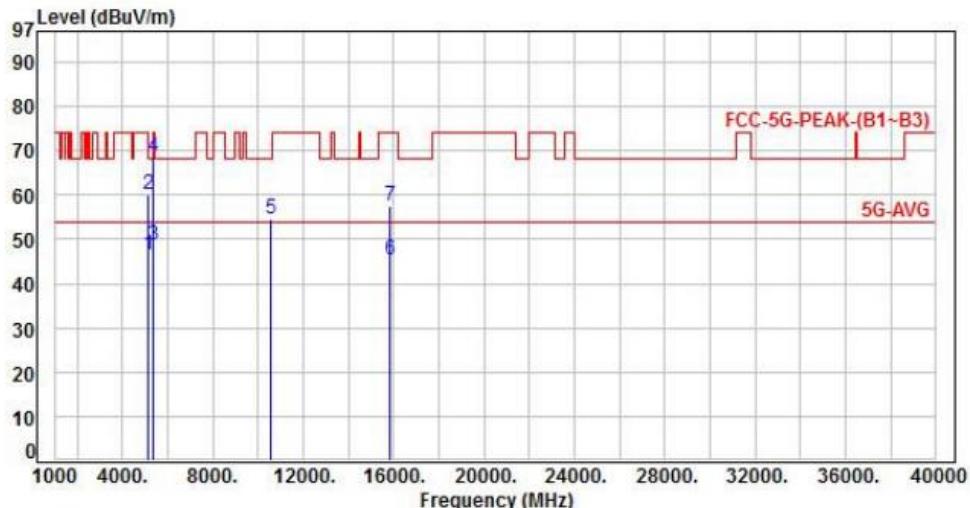

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5110.00	5.61	40.90	46.51	54.00	-7.49	Average	100	55	P
2	5110.00	5.61	54.51	60.12	74.00	-13.88	Peak	100	55	P
3	5350.00	6.12	42.73	48.85	54.00	-5.15	Average	180	42	P
4	5350.00	6.12	62.62	68.74	74.00	-5.26	Peak	180	42	P
5	10540.00	13.18	41.28	54.46	68.20	-13.74	Peak	100	141	P
6	15810.00	14.59	38.66	45.25	54.00	-8.75	Average	100	52	P
7	15810.00	14.59	43.11	57.70	74.00	-16.30	Peak	100	52	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 5, Band 2, CH62	:	

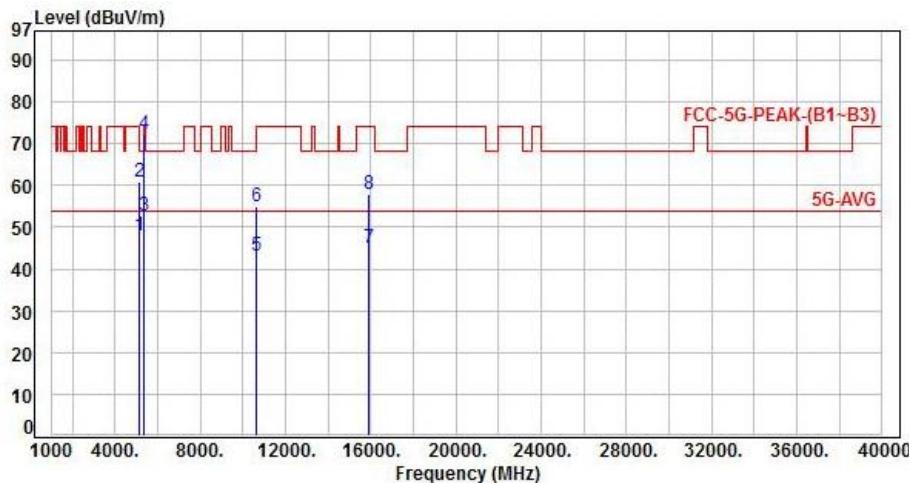

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)	P/F
1	5150.00	5.72	42.20	47.92	54.00	-6.08	Average	130	300	P
2	5150.00	5.72	55.16	60.88	74.00	-13.12	Peak	130	300	P
3	5350.00	6.12	46.73	52.85	54.00	-1.15	Average	142	300	P
4	5350.00	6.12	66.14	72.26	74.00	-1.74	Peak	142	295	P
5	10620.00	13.37	29.83	43.20	54.00	-10.80	Average	325	300	P
6	10620.00	13.37	41.76	55.13	74.00	-18.87	Peak	325	300	P
7	15930.00	14.30	30.76	45.06	54.00	-8.94	Average	100	139	P
8	15930.00	14.30	43.55	57.85	74.00	-16.15	Peak	100	139	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 5, Band 2, CH62	:	

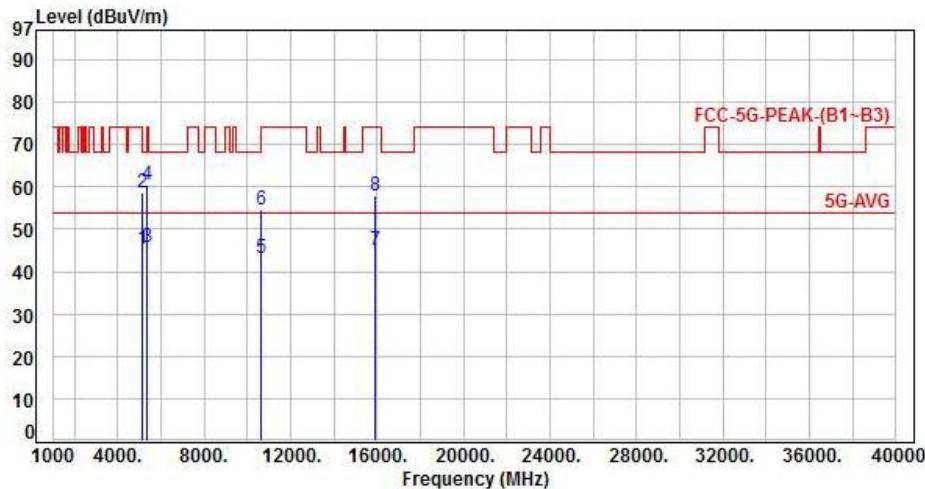

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	39.75	45.47	54.00	-8.53	Average	100	42	P
2	5150.00	5.72	52.82	58.54	74.00	-15.46	Peak	100	42	P
3	5350.00	6.12	39.58	45.70	54.00	-8.30	Average	100	55	P
4	5350.00	6.12	54.30	60.42	74.00	-13.58	Peak	100	55	P
5	10620.00	13.37	29.71	43.08	54.00	-10.92	Average	100	153	P
6	10620.00	13.37	41.22	54.59	74.00	-19.41	Peak	100	153	P
7	15930.00	14.30	30.59	44.89	54.00	-9.11	Average	100	50	P
8	15930.00	14.30	43.57	57.87	74.00	-16.13	Peak	100	50	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 6, Band 2, CH58	:	

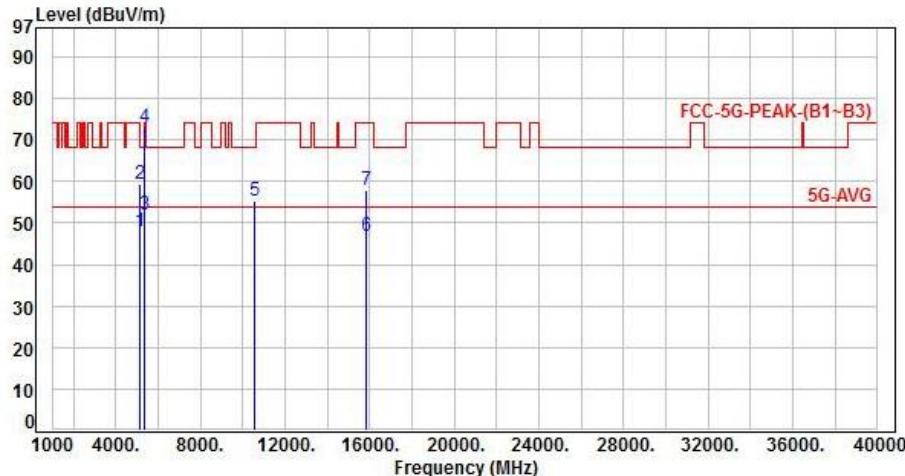

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	42.24	47.88	54.00	-6.12	Average	215	235	P
2	5120.00	5.64	53.87	59.51	74.00	-14.49	Peak	215	235	P
3	5350.00	6.12	46.05	52.17	54.00	-1.83	Average	215	235	P
4	5350.00	6.12	66.83	72.95	74.00	-1.05	Peak	215	235	P
5	10580.00	13.30	42.06	55.36	68.20	-12.84	Peak	330	300	P
6	15870.00	14.43	32.46	46.89	54.00	-7.11	Average	100	258	P
7	15870.00	14.43	43.53	57.96	74.00	-16.04	Peak	100	258	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 6, Band 2, CH58	:	

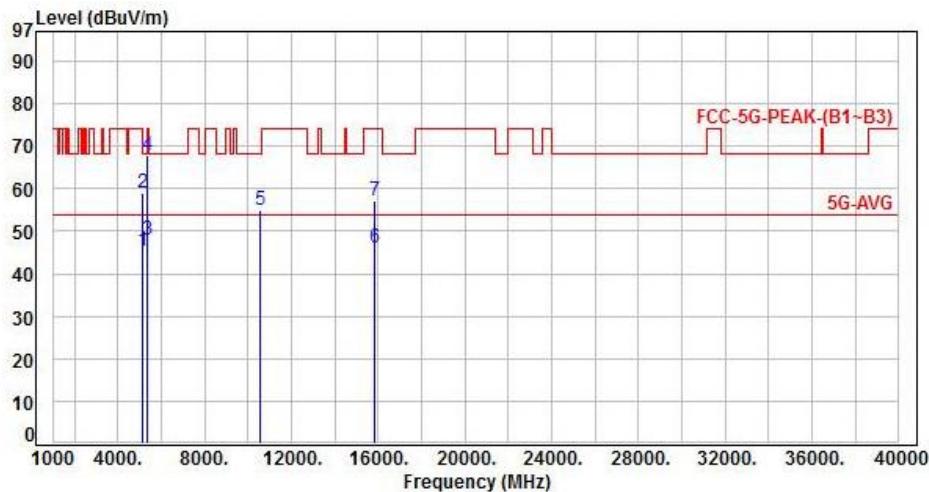

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	39.62	45.26	54.00	-8.74	Average	180	40	P
2	5120.00	5.64	53.54	59.18	74.00	-14.82	Peak	180	40	P
3	5350.00	6.12	41.74	47.86	54.00	-6.14	Average	180	40	P
4	5350.00	6.12	61.69	67.81	74.00	-6.19	Peak	180	40	P
5	10580.00	13.30	41.63	54.93	68.20	-13.27	Peak	100	143	P
6	15870.00	14.43	31.82	46.25	54.00	-7.75	Average	100	53	P
7	15870.00	14.43	42.77	57.20	74.00	-16.80	Peak	100	53	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 8, Band 2, CH52	:	

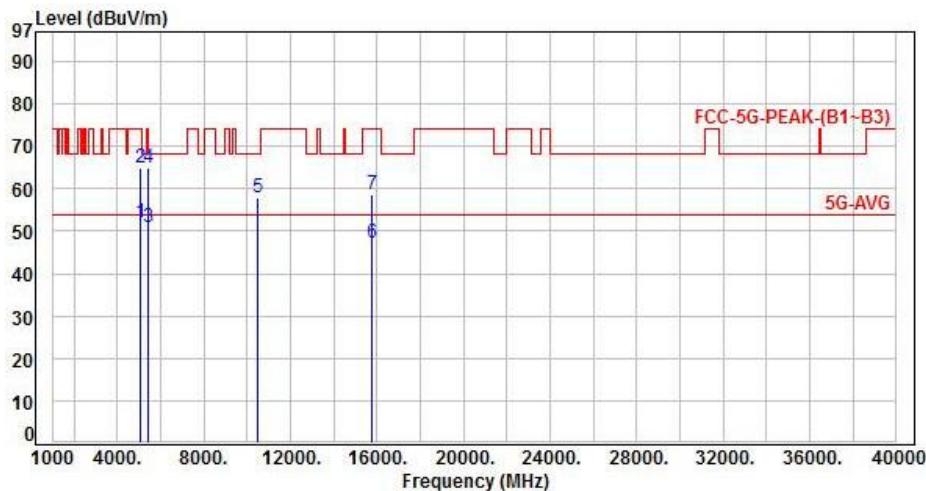

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5100.00	5.58	46.26	51.84	54.00	-2.16	Average	230	30	P
2	5100.00	5.58	59.16	64.74	74.00	-9.26	Peak	230	30	P
3	5420.00	6.23	44.73	50.96	54.00	-3.04	Average	200	230	P
4	5420.00	6.23	58.71	64.94	74.00	-9.06	Peak	200	230	P
5	10520.00	13.12	44.61	57.73	68.20	-10.47	Peak	315	310	P
6	15780.00	14.59	32.44	47.03	54.00	-6.97	Average	120	245	P
7	15780.00	14.59	44.10	58.69	74.00	-15.31	Peak	120	245	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 8, Band 2, CH52	:	

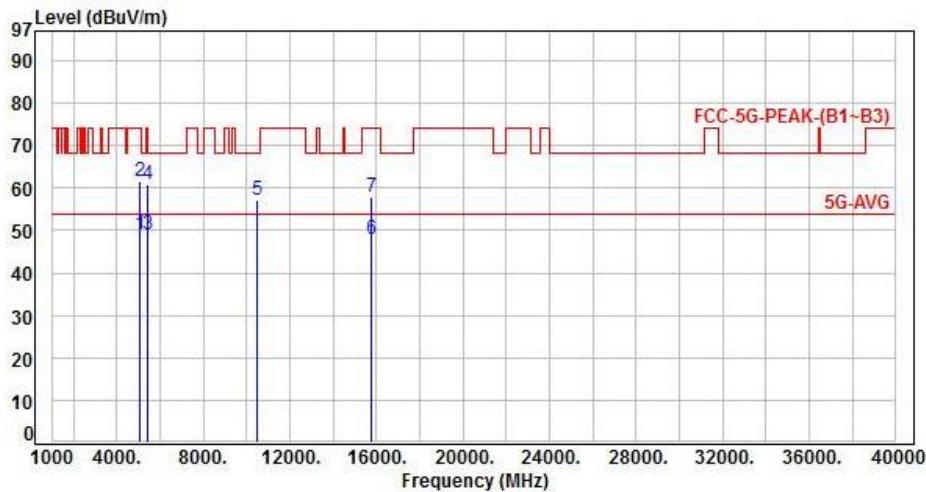

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)	P/F
1	5100.00	5.58	43.55	49.13	54.00	-4.87	Average	200	43	P
2	5100.00	5.58	56.17	61.75	74.00	-12.25	Peak	200	43	P
3	5420.00	6.23	42.78	49.01	54.00	-4.99	Average	100	43	P
4	5420.00	6.23	54.69	60.92	74.00	-13.08	Peak	100	43	P
5	10520.00	13.12	44.11	57.23	68.20	-10.97	Peak	100	135	P
6	15780.00	14.59	33.46	48.05	54.00	-5.95	Average	100	60	P
7	15780.00	14.59	43.25	57.84	74.00	-16.16	Peak	100	60	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor