




Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 2, CH60		

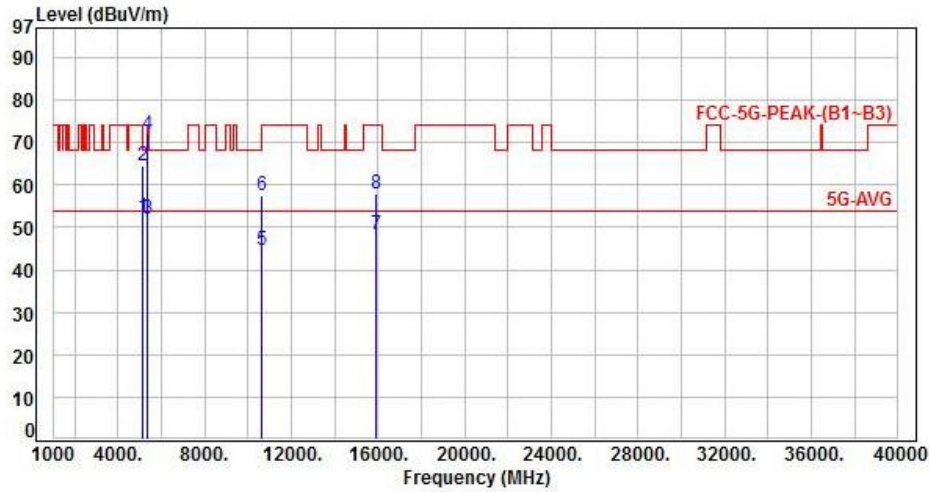


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.00	5.69	46.52	52.21	54.00	-1.79	Average	215	30	P
2	5140.00	5.69	58.73	64.42	74.00	-9.58	Peak	215	30	P
3	5350.00	6.12	45.71	51.83	54.00	-2.17	Average	200	235	P
4	5350.00	6.12	65.93	72.05	74.00	-1.95	Peak	200	235	P
5	10600.00	13.37	31.41	44.78	54.00	-9.22	Average	311	290	P
6	10600.00	13.37	44.29	57.66	74.00	-16.34	Peak	311	290	P
7	15900.00	14.35	33.86	48.21	54.00	-5.79	Average	100	243	P
8	15900.00	14.35	43.52	57.87	74.00	-16.13	Peak	100	243	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 2, CH60		:

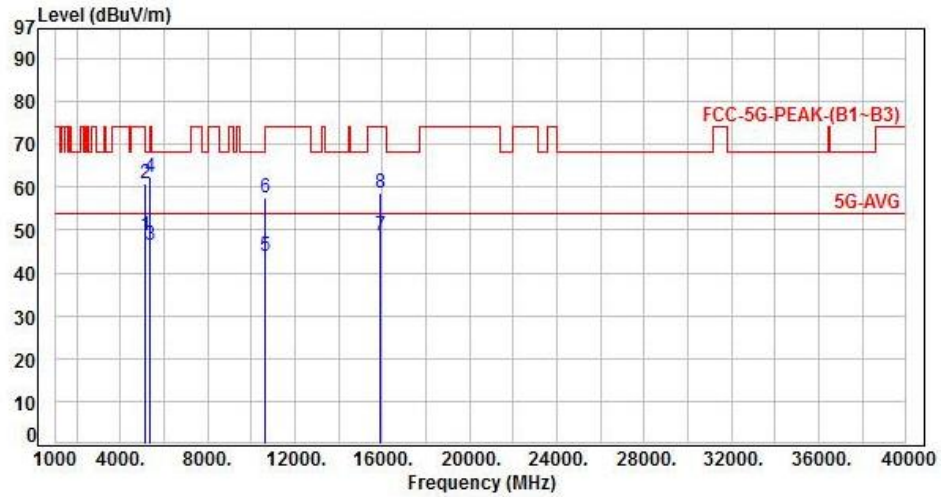


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.00	5.69	43.12	48.81	54.00	-5.19	Average	200	40	P
2	5140.00	5.69	55.14	60.83	74.00	-13.17	Peak	200	40	P
3	5350.00	6.12	40.52	46.64	54.00	-7.36	Average	100	40	P
4	5350.00	6.12	56.21	62.33	74.00	-11.67	Peak	100	40	P
5	10600.00	13.37	30.58	43.95	54.00	-10.05	Average	100	130	P
6	10600.00	13.37	44.16	57.53	74.00	-16.47	Peak	100	130	P
7	15900.00	14.35	34.26	48.61	54.00	-5.39	Average	110	50	P
8	15900.00	14.35	44.15	58.50	74.00	-15.50	Peak	110	50	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 2, CH64		:

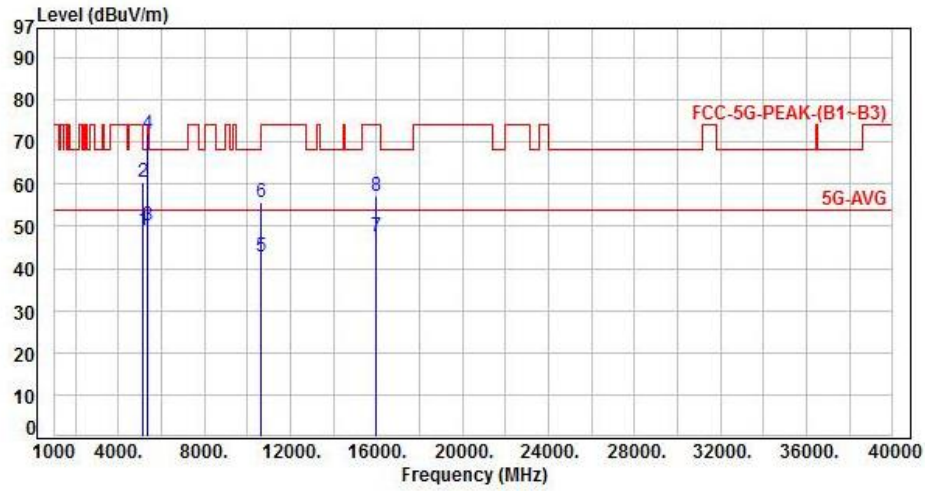


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	43.56	49.20	54.00	-4.80	Average	215	195	P
2	5120.00	5.64	54.88	60.52	74.00	-13.48	Peak	215	195	P
3	5350.00	6.12	44.17	50.29	54.00	-3.71	Average	205	230	P
4	5350.00	6.12	65.95	72.07	74.00	-1.93	Peak	205	230	P
5	10640.00	13.38	29.54	42.92	54.00	-11.08	Average	321	300	P
6	10640.00	13.38	42.17	55.55	74.00	-18.45	Peak	321	300	P
7	15960.00	14.25	33.16	47.41	54.00	-6.59	Average	100	148	P
8	15960.00	14.25	42.89	57.14	74.00	-16.86	Peak	100	148	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 2, CH64		:

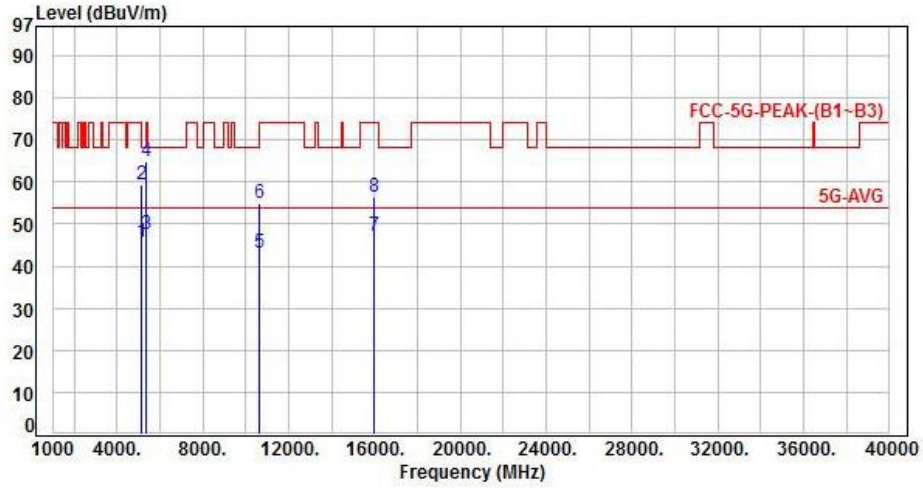


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	40.11	45.75	54.00	-8.25	Average	100	132	P
2	5120.00	5.64	53.82	59.46	74.00	-14.54	Peak	100	132	P
3	5350.00	6.12	41.47	47.59	54.00	-6.41	Average	100	43	P
4	5350.00	6.12	58.72	64.84	74.00	-9.16	Peak	100	43	P
5	10640.00	13.38	29.67	43.05	54.00	-10.95	Average	100	135	P
6	10640.00	13.38	41.49	54.87	74.00	-19.13	Peak	100	135	P
7	15960.00	14.25	32.81	47.06	54.00	-6.94	Average	120	45	P
8	15960.00	14.25	42.17	56.42	74.00	-17.58	Peak	120	45	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 2, CH54		:

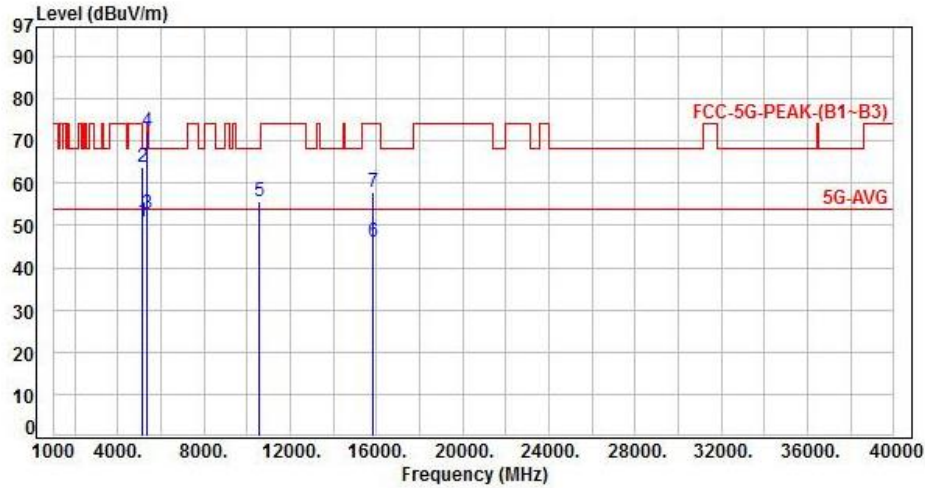


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5110.00	5.61	45.16	50.77	54.00	-3.23	Average	227	30	P
2	5110.00	5.61	58.09	63.70	74.00	-10.30	Peak	227	30	P
3	5350.00	6.12	46.75	52.87	54.00	-1.13	Average	170	245	P
4	5350.00	6.12	66.28	72.40	74.00	-1.60	Peak	170	245	P
5	10540.00	13.18	42.53	55.71	68.20	-12.49	Peak	315	300	P
6	15810.00	14.59	31.38	45.97	54.00	-8.03	Average	100	255	P
7	15810.00	14.59	43.46	58.05	74.00	-15.95	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 2, CH54		:

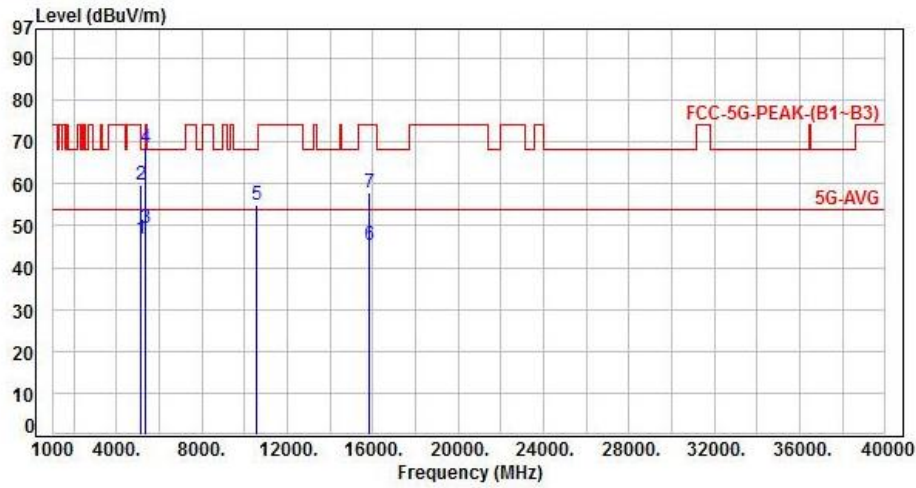


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5110.00	5.61	41.33	46.94	54.00	-7.06	Average	120	45	P
2	5110.00	5.61	54.11	59.72	74.00	-14.28	Peak	120	45	P
3	5350.00	6.12	43.16	49.28	54.00	-4.72	Average	150	47	P
4	5350.00	6.12	62.53	68.65	74.00	-5.35	Peak	150	47	P
5	10540.00	13.18	41.82	55.00	68.20	-13.20	Peak	100	145	P
6	15810.00	14.59	30.72	45.31	54.00	-8.69	Average	100	50	P
7	15810.00	14.59	43.25	57.84	74.00	-16.16	Peak	100	50	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 2, CH62		:

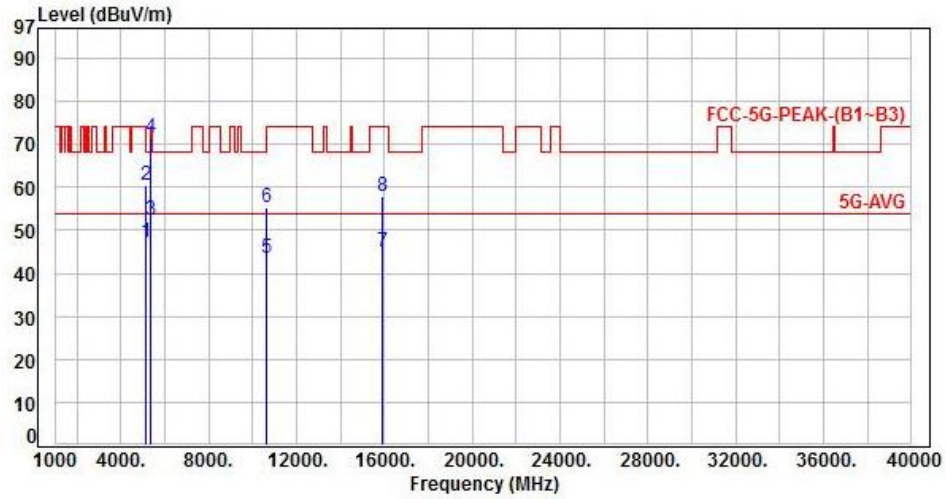


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	41.37	47.09	54.00	-6.91	Average	230	30	P
2	5150.00	5.72	54.77	60.49	74.00	-13.51	Peak	230	30	P
3	5350.00	6.12	46.23	52.35	54.00	-1.65	Average	230	295	P
4	5350.00	6.12	65.55	71.67	74.00	-2.33	Peak	230	295	P
5	10620.00	13.37	30.11	43.48	54.00	-10.52	Average	325	290	P
6	10620.00	13.37	41.82	55.19	74.00	-18.81	Peak	325	290	P
7	15930.00	14.30	30.55	44.85	54.00	-9.15	Average	100	139	P
8	15930.00	14.30	43.73	58.03	74.00	-15.97	Peak	100	139	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 2, CH62		:

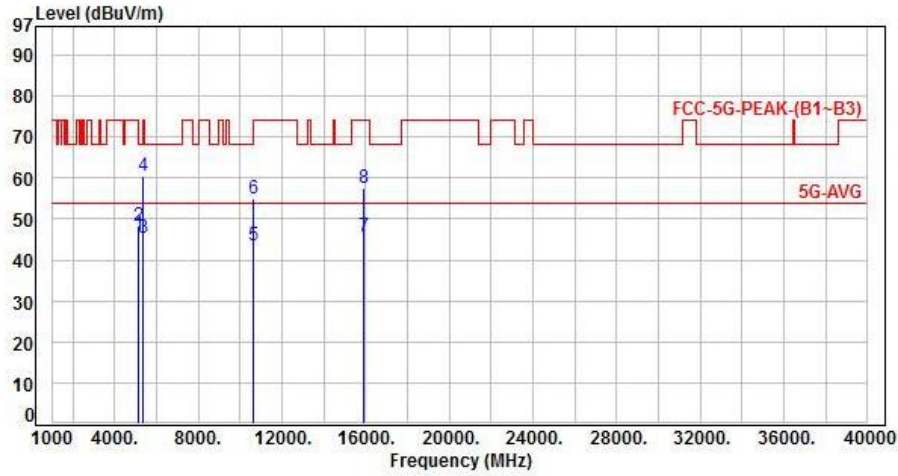


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	40.53	46.25	54.00	-7.75	Average	120	50	P
2	5150.00	5.72	42.56	48.28	74.00	-25.72	Peak	120	50	P
3	5350.00	6.12	39.41	45.53	54.00	-8.47	Average	120	50	P
4	5350.00	6.12	54.39	60.51	74.00	-13.49	Peak	120	50	P
5	10620.00	13.37	30.17	43.54	54.00	-10.46	Average	100	155	P
6	10620.00	13.37	41.63	55.00	74.00	-19.00	Peak	100	155	P
7	15930.00	14.30	31.28	45.58	54.00	-8.42	Average	100	51	P
8	15930.00	14.30	43.26	57.56	74.00	-16.44	Peak	100	51	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 2, CH58		:

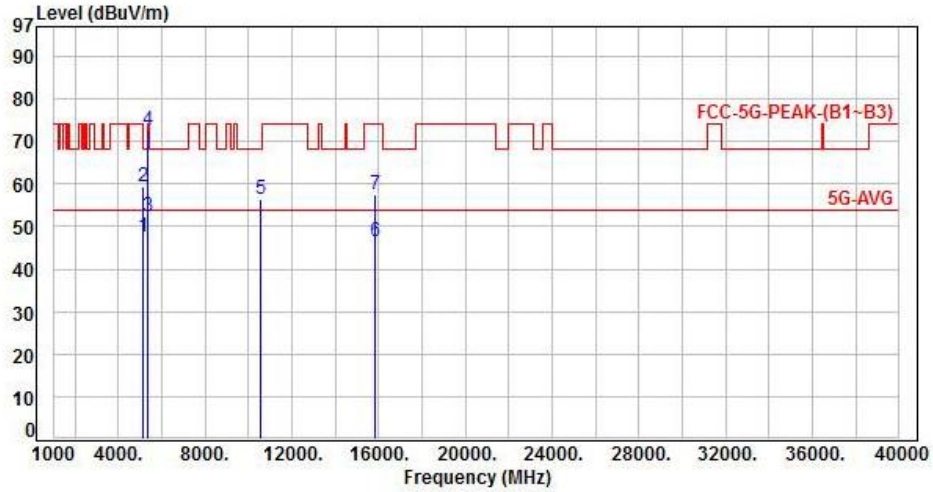


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	42.11	47.75	54.00	-6.25	Average	200	30	P
2	5120.00	5.64	53.62	59.26	74.00	-14.74	Peak	200	30	P
3	5350.00	6.12	46.14	52.26	54.00	-1.74	Average	200	30	P
4	5350.00	6.12	66.56	72.68	74.00	-1.32	Peak	200	30	P
5	10580.00	13.30	43.03	56.33	68.20	-11.87	Peak	330	297	P
6	15870.00	14.43	32.16	46.59	54.00	-7.41	Average	100	253	P
7	15870.00	14.43	43.16	57.59	74.00	-16.41	Peak	100	253	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 2, CH58		:

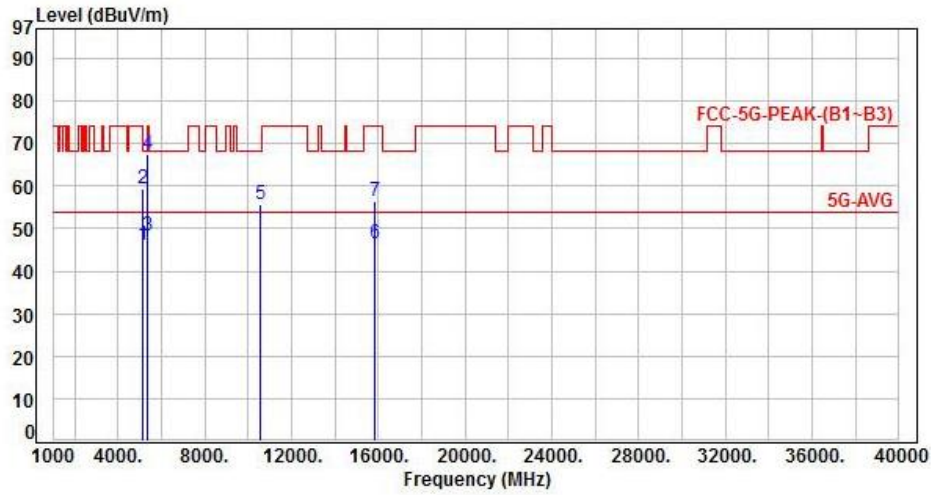


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	5.64	40.29	45.93	54.00	-8.07	Average	151	45	P
2	5120.00	5.64	53.71	59.35	74.00	-14.65	Peak	151	45	P
3	5350.00	6.12	42.16	48.28	54.00	-5.72	Average	151	45	P
4	5350.00	6.12	61.42	67.54	74.00	-6.46	Peak	151	45	P
5	10580.00	13.30	42.21	55.51	68.20	-12.69	Peak	100	154	P
6	15870.00	14.43	32.05	46.48	54.00	-7.52	Average	100	48	P
7	15870.00	14.43	42.16	56.59	74.00	-17.41	Peak	100	48	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 3, CH100		:

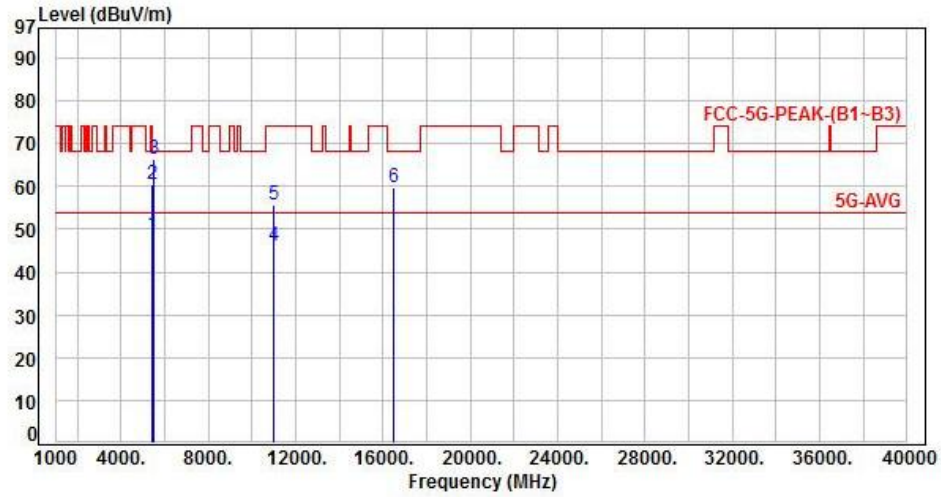


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	42.19	48.51	54.00	-5.49	Average	180	310	P
2	5460.00	6.32	54.03	60.35	74.00	-13.65	Peak	180	310	P
3	5470.00	6.34	59.93	66.27	68.20	-1.93	Peak	180	310	P
4	11000.00	13.81	32.44	46.25	54.00	-7.75	Average	315	275	P
5	11000.00	13.81	42.02	55.83	74.00	-18.17	Peak	315	275	P
6	16500.00	15.83	43.74	59.57	68.20	-8.63	Peak	100	45	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 3, CH100		:

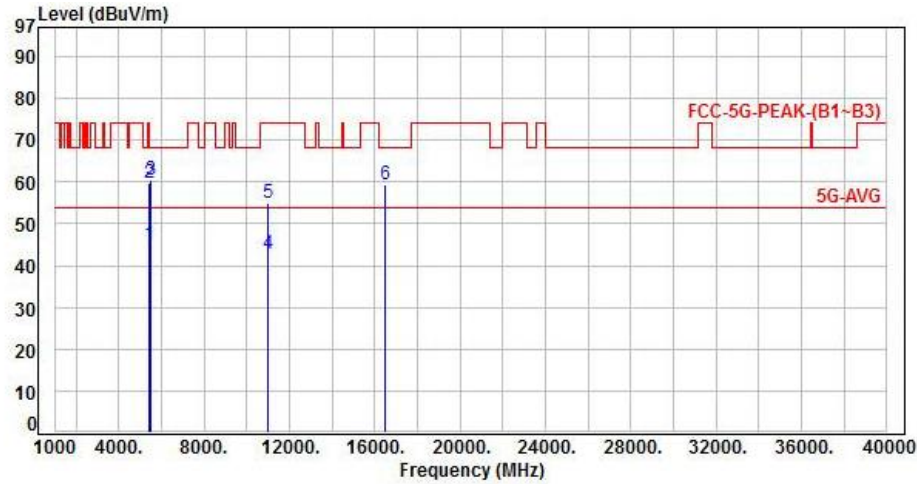


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	38.76	45.08	54.00	-8.92	Average	100	165	P
2	5460.00	6.32	53.43	59.75	74.00	-14.25	Peak	100	165	P
3	5470.00	6.34	54.28	60.62	68.20	-7.58	Peak	100	165	P
4	11000.00	13.81	28.80	42.61	54.00	-11.39	Average	100	152	P
5	11000.00	13.81	41.32	55.13	74.00	-18.87	Peak	100	152	P
6	16500.00	15.83	43.70	59.53	68.20	-8.67	Peak	100	57	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 3, CH120		:

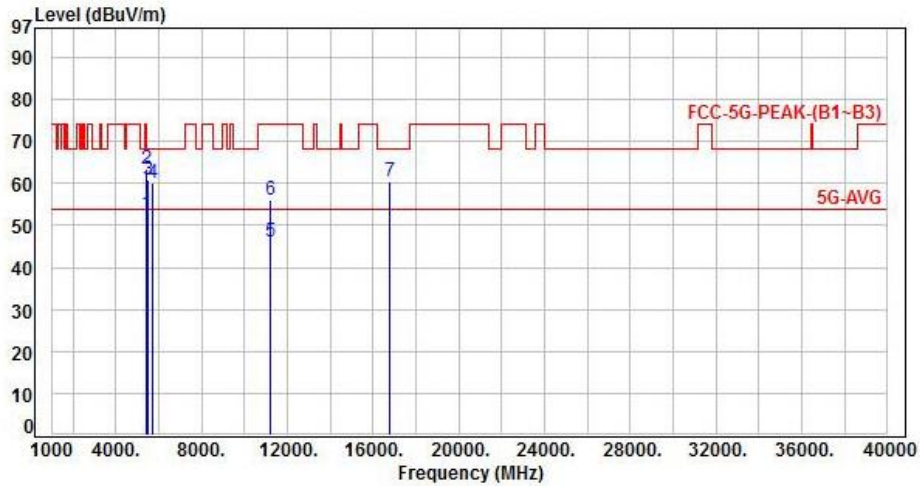


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	6.28	46.32	52.60	54.00	-1.40	Average	165	238	P
2	5440.00	6.28	57.28	63.56	74.00	-10.44	Peak	165	238	P
3	5470.00	6.34	54.42	60.76	68.20	-7.44	Peak	165	238	P
4	5725.00	6.32	53.81	60.13	68.20	-8.07	Peak	165	238	P
5	11200.00	14.09	31.85	45.94	54.00	-8.06	Average	310	257	P
6	11200.00	14.09	42.06	56.15	74.00	-17.85	Peak	310	257	P
7	16800.00	17.95	42.65	60.60	68.20	-7.60	Peak	100	59	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 3, CH120		:

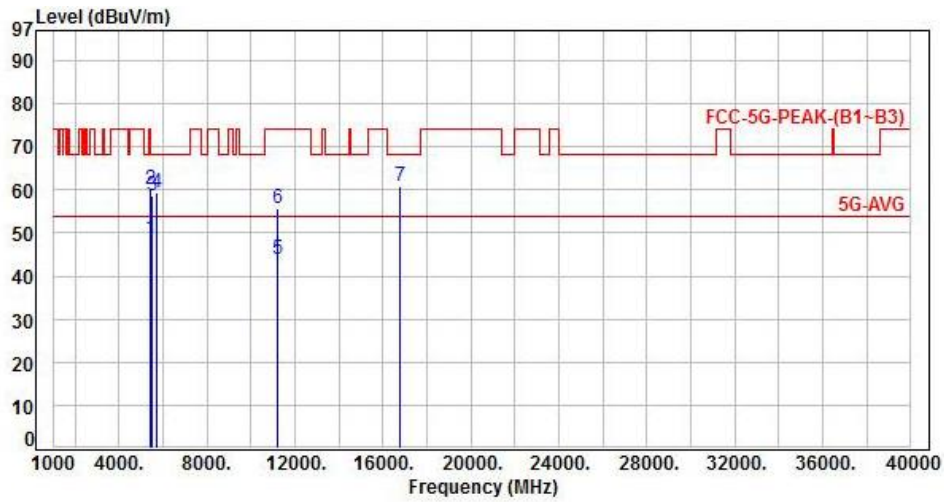


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	6.28	42.58	48.86	54.00	-5.14	Average	120	30	P
2	5440.00	6.28	53.78	60.06	74.00	-13.94	Peak	120	30	P
3	5470.00	6.34	52.30	58.64	68.20	-9.56	Peak	120	30	P
4	5725.00	6.32	52.94	59.26	68.20	-8.94	Peak	120	30	P
5	11200.00	14.09	29.67	43.76	54.00	-10.24	Average	150	147	P
6	11200.00	14.09	41.74	55.83	74.00	-18.17	Peak	150	147	P
7	16800.00	17.95	43.09	61.04	68.20	-7.16	Peak	100	52	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 3, CH140		:

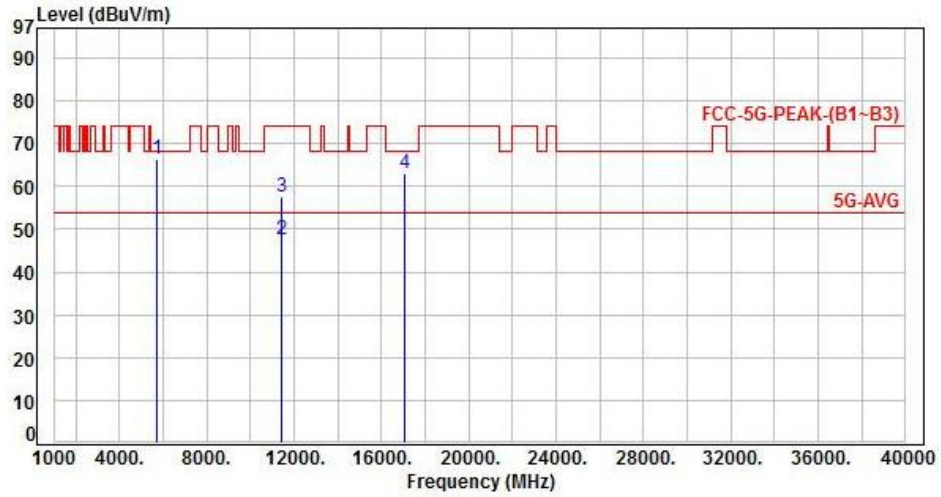


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	60.15	66.47	68.20	-1.73	Peak	100	80	P
2	11400.00	14.29	33.36	47.65	54.00	-6.35	Average	100	255	P
3	11400.00	14.29	43.22	57.51	74.00	-16.49	Peak	100	255	P
4	17100.00	19.40	43.67	63.07	68.20	-5.13	Peak	100	245	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 3, CH140		:

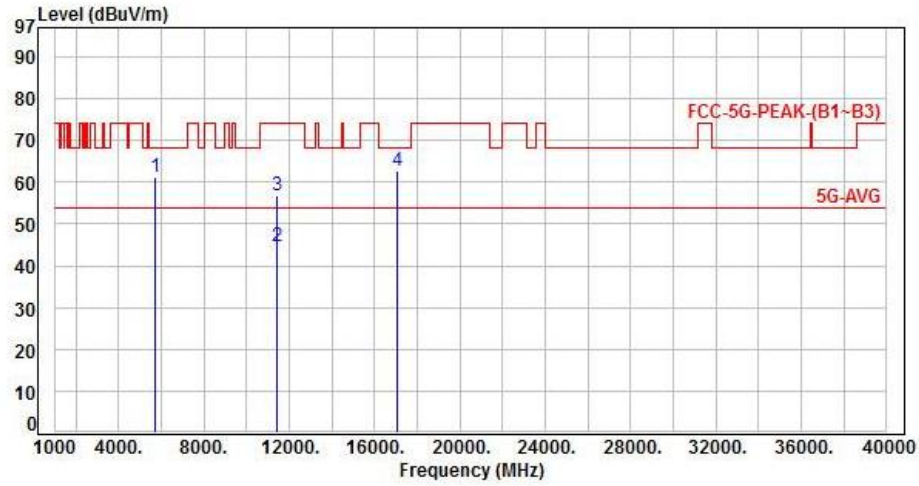


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	54.89	61.21	68.20	-6.99	Peak	100	150	P
2	11400.00	14.29	30.38	44.67	54.00	-9.33	Average	100	153	P
3	11400.00	14.29	42.33	56.62	74.00	-17.38	Peak	100	153	P
4	17100.00	19.40	43.41	62.81	68.20	-5.39	Peak	100	50	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3, CH100		:

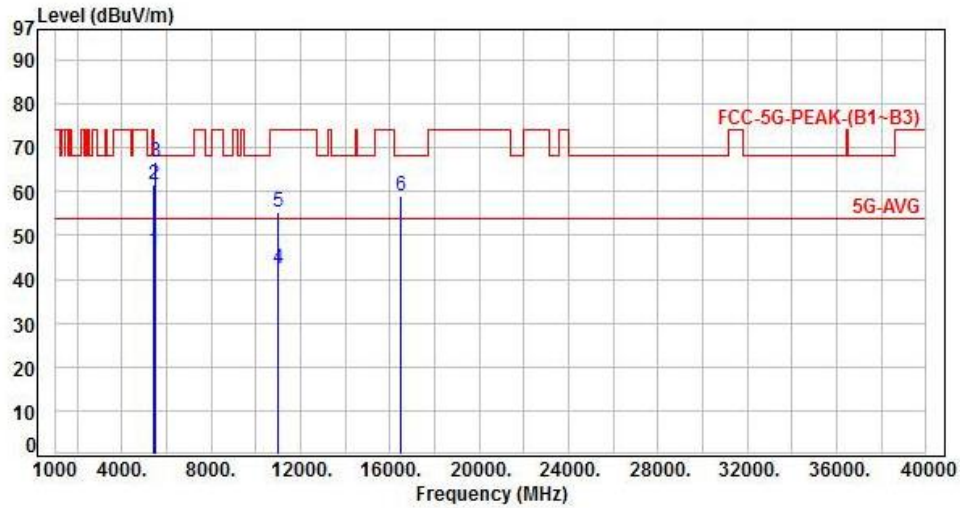


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.24	46.56	54.00	-7.44	Average	210	120	P
2	5460.00	6.32	55.33	61.65	74.00	-12.35	Peak	210	120	P
3	5470.00	6.34	60.32	66.66	68.20	-1.54	Peak	210	120	P
4	11000.00	13.81	28.56	42.37	54.00	-11.63	Average	300	280	P
5	11000.00	13.81	41.45	55.26	74.00	-18.74	Peak	300	280	P
6	16500.00	15.83	43.11	58.94	68.20	-9.26	Peak	100	255	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3, CH100		:

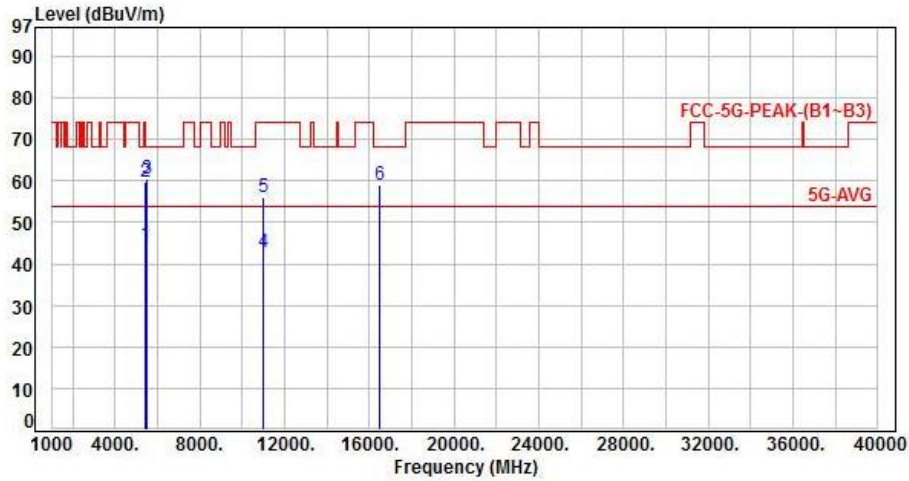


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	38.48	44.80	54.00	-9.20	Average	100	157	P
2	5460.00	6.32	53.38	59.70	74.00	-14.30	Peak	100	157	P
3	5470.00	6.34	54.08	60.42	68.20	-7.78	Peak	100	157	P
4	11000.00	13.81	29.13	42.94	54.00	-11.06	Average	100	142	P
5	11000.00	13.81	42.35	56.16	74.00	-17.84	Peak	100	142	P
6	16500.00	15.83	43.26	59.09	68.20	-9.11	Peak	100	47	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3, CH120		

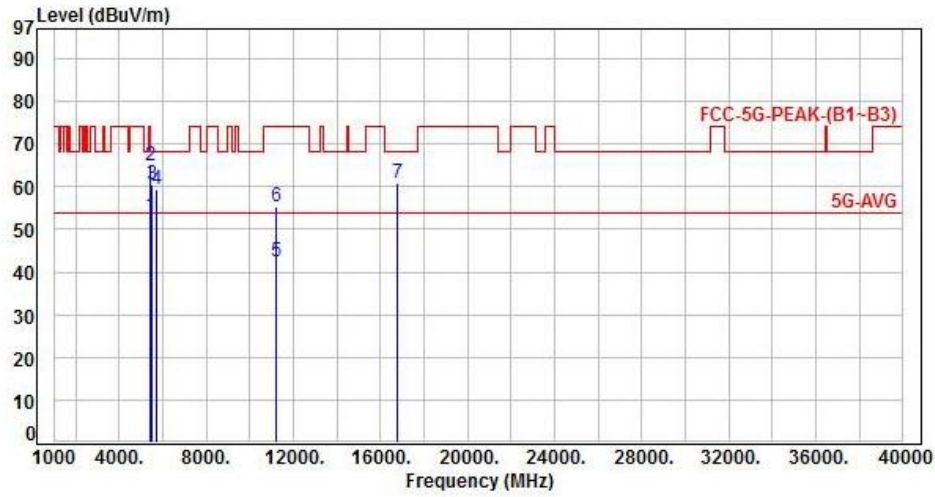


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	6.28	46.71	52.99	54.00	-1.01	Average	255	240	P
2	5440.00	6.28	58.45	64.73	74.00	-9.27	Peak	255	240	P
3	5470.00	6.34	54.31	60.65	68.20	-7.55	Peak	255	240	P
4	5725.00	6.32	53.20	59.52	68.20	-8.68	Peak	255	240	P
5	11200.00	14.09	28.46	42.55	54.00	-11.45	Average	290	278	P
6	11200.00	14.09	41.40	55.49	74.00	-18.51	Peak	290	278	P
7	16800.00	17.95	42.84	60.79	68.20	-7.41	Peak	100	245	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3, CH120		:

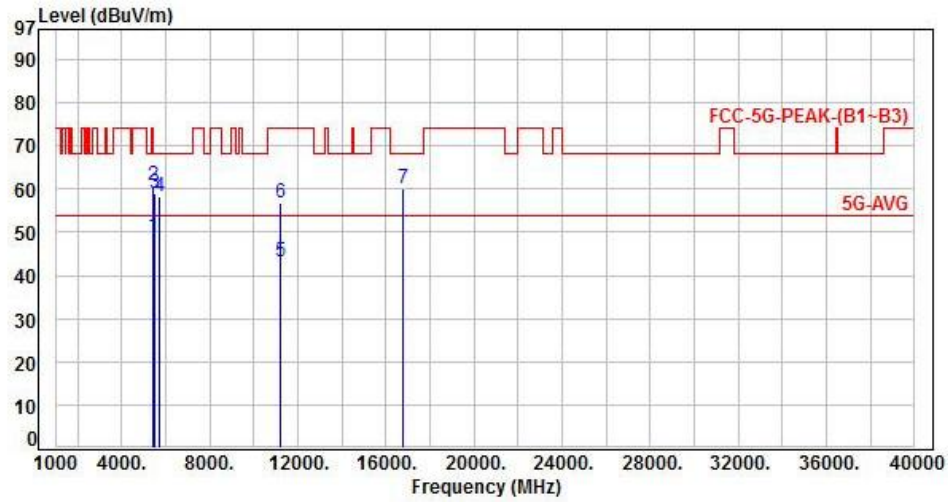


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	6.28	42.72	49.00	54.00	-5.00	Average	150	35	P
2	5440.00	6.28	54.61	60.89	74.00	-13.11	Peak	150	35	P
3	5470.00	6.34	52.60	58.94	68.20	-9.26	Peak	150	35	P
4	5725.00	6.32	52.11	58.43	68.20	-9.77	Peak	150	35	P
5	11200.00	14.09	29.16	43.25	54.00	-10.75	Average	100	143	P
6	11200.00	14.09	42.58	56.67	74.00	-17.33	Peak	100	143	P
7	16800.00	17.95	42.15	60.10	68.20	-8.10	Peak	100	50	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3, CH140		:

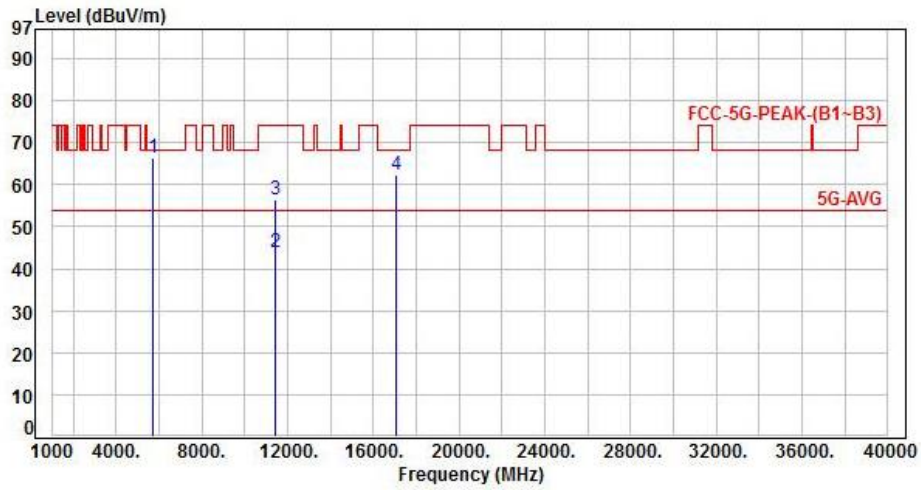


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	60.14	66.46	68.20	-1.74	Peak	190	65	P
2	11400.00	14.29	29.42	43.71	54.00	-10.29	Average	300	275	P
3	11400.00	14.29	42.13	56.42	74.00	-17.58	Peak	300	275	P
4	17100.00	19.40	42.85	62.25	68.20	-5.95	Peak	100	250	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3, CH140		:

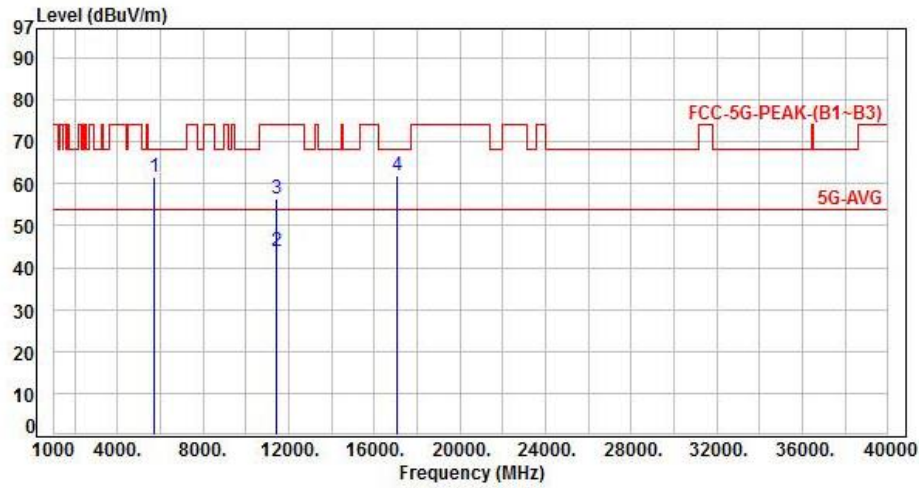


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	55.44	61.76	68.20	-6.44	Peak	100	160	P
2	11400.00	14.29	29.73	44.02	54.00	-9.98	Average	100	149	P
3	11400.00	14.29	42.25	56.54	74.00	-17.46	Peak	100	149	P
4	17100.00	19.40	42.58	61.98	68.20	-6.22	Peak	100	52	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3, CH102		:

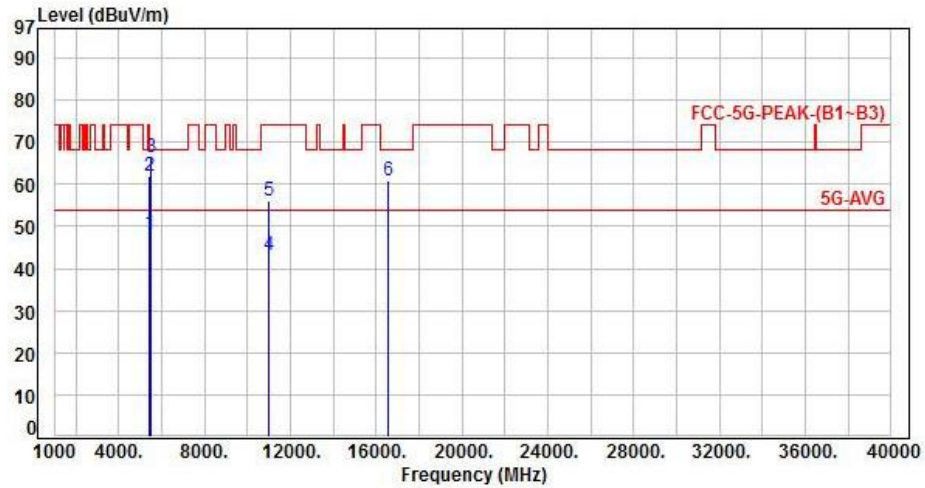


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	42.00	48.32	54.00	-5.68	Average	215	245	P
2	5460.00	6.32	55.66	61.98	74.00	-12.02	Peak	215	245	P
3	5470.00	6.34	60.15	66.49	68.20	-1.71	Peak	215	245	P
4	11020.00	13.84	29.18	43.02	54.00	-10.98	Average	299	283	P
5	11020.00	13.84	42.34	56.18	74.00	-17.82	Peak	299	283	P
6	16530.00	16.08	44.64	60.72	68.20	-7.48	Peak	100	263	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 3, CH102		:

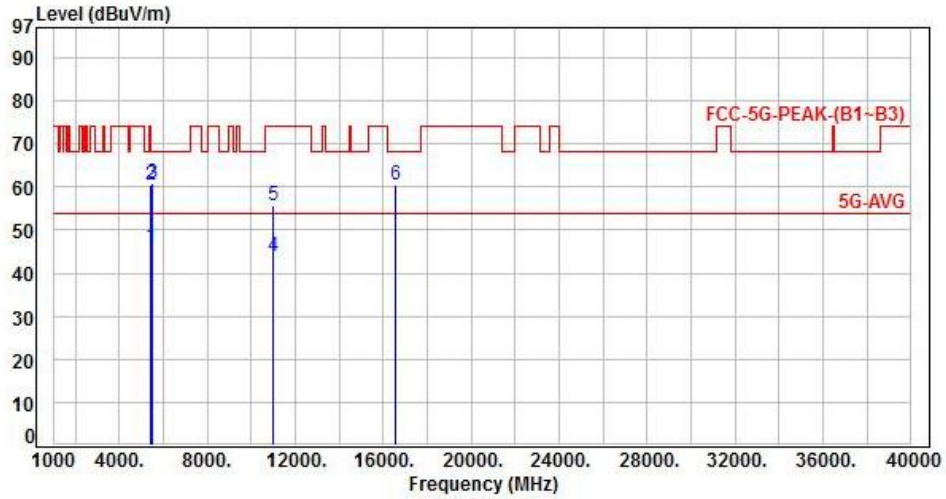


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.69	46.01	54.00	-7.99	Average	150	59	P
2	5460.00	6.32	54.04	60.36	74.00	-13.64	Peak	150	59	P
3	5470.00	6.34	54.52	60.86	68.20	-7.34	Peak	150	59	P
4	11020.00	13.84	29.91	43.75	54.00	-10.25	Average	100	139	P
5	11020.00	13.84	41.86	55.70	74.00	-18.30	Peak	100	139	P
6	16530.00	16.08	44.27	60.35	68.20	-7.85	Peak	100	79	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3, CH118		:

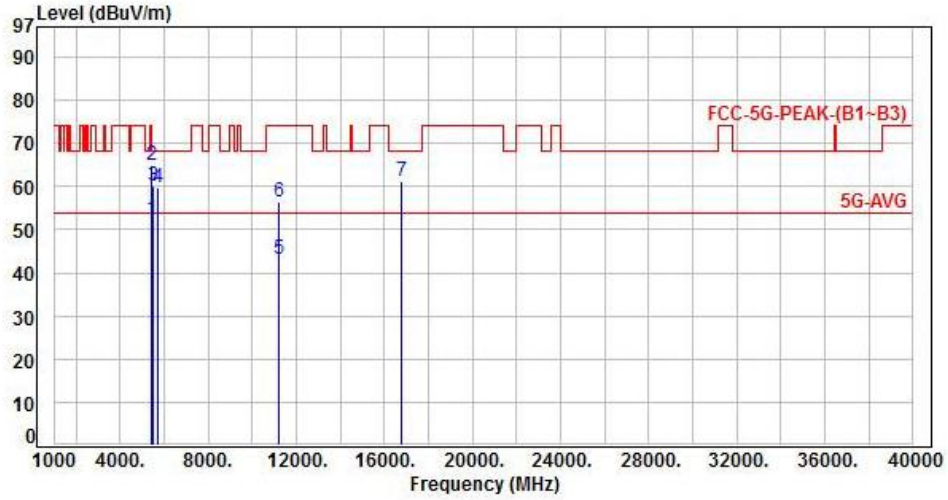


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5430.00	6.25	46.00	52.25	54.00	-1.75	Average	215	295	P
2	5430.00	6.25	58.55	64.80	74.00	-9.20	Peak	215	295	P
3	5470.00	6.34	53.67	60.01	68.20	-8.19	Peak	215	295	P
4	5725.00	6.32	53.56	59.88	68.20	-8.32	Peak	215	295	P
5	11180.00	14.07	29.18	43.25	54.00	-10.75	Average	300	265	P
6	11180.00	14.07	42.21	56.28	74.00	-17.72	Peak	300	265	P
7	16770.00	17.65	43.45	61.10	68.20	-7.10	Peak	100	258	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 3, CH118		:

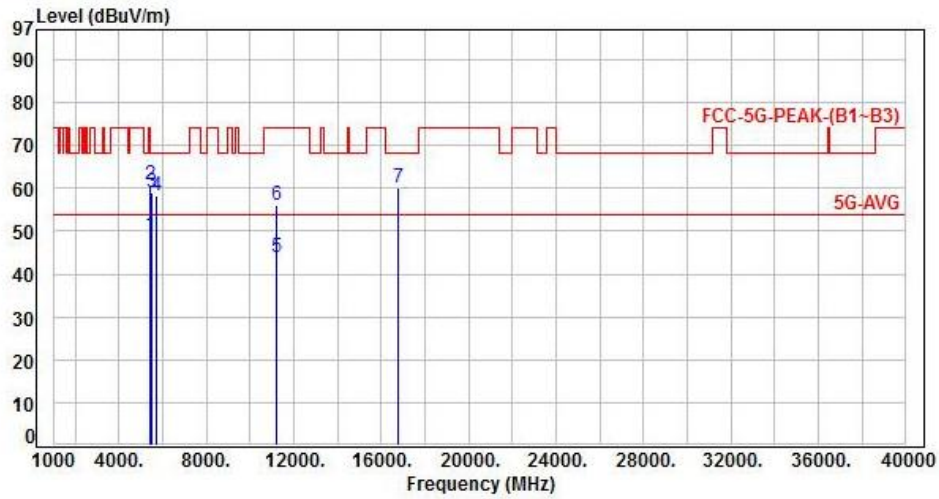


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5430.00	6.25	42.72	48.97	54.00	-5.03	Average	150	42	P
2	5430.00	6.25	54.61	60.86	74.00	-13.14	Peak	150	42	P
3	5470.00	6.34	52.60	58.94	68.20	-9.26	Peak	150	42	P
4	5725.00	6.32	52.11	58.43	68.20	-9.77	Peak	150	42	P
5	11180.00	14.07	29.91	43.98	54.00	-10.02	Average	100	152	P
6	11180.00	14.07	41.89	55.96	74.00	-18.04	Peak	100	152	P
7	16770.00	17.65	42.33	59.98	68.20	-8.22	Peak	145	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3, CH134		:

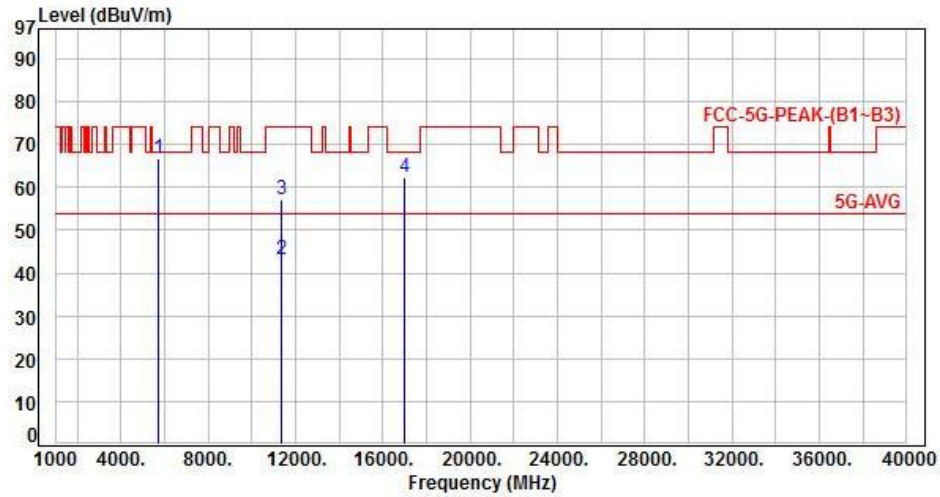


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	60.61	66.93	68.20	-1.27	Peak	100	295	P
2	11340.00	14.20	28.96	43.16	54.00	-10.84	Average	290	276	P
3	11340.00	14.20	42.83	57.03	74.00	-16.97	Peak	290	276	P
4	17010.00	19.09	43.34	62.43	68.20	-5.77	Peak	100	247	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 3, CH134		:

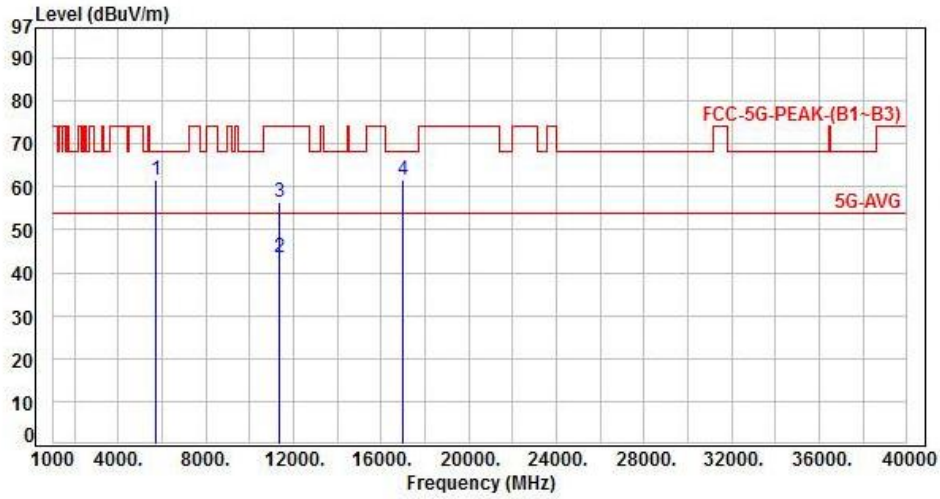


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	55.27	61.59	68.20	-6.61	Peak	100	163	P
2	11340.00	14.20	29.46	43.66	54.00	-10.34	Average	100	249	P
3	11340.00	14.20	42.17	56.37	74.00	-17.63	Peak	100	249	P
4	17010.00	19.09	42.58	61.67	68.20	-6.53	Peak	100	65	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 3, CH106		:

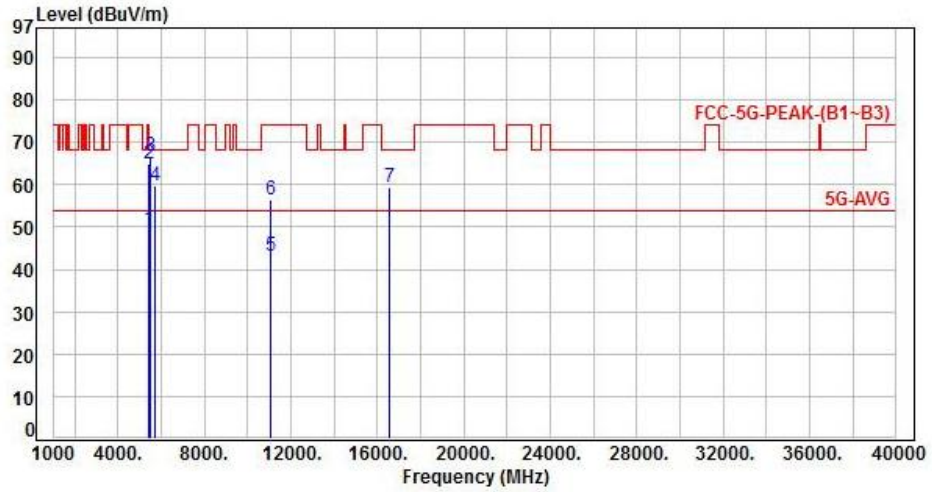


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	43.16	49.48	54.00	-4.52	Average	150	295	P
2	5460.00	6.32	58.68	65.00	74.00	-9.00	Peak	150	295	P
3	5470.00	6.34	60.24	66.58	68.20	-1.62	Peak	150	295	P
4	5725.00	6.32	53.57	59.89	68.20	-8.31	Peak	150	295	P
5	11060.00	13.90	29.14	43.04	54.00	-10.96	Average	295	287	P
6	11060.00	13.90	42.68	56.58	74.00	-17.42	Peak	295	287	P
7	16590.00	16.56	42.85	59.41	68.20	-8.79	Peak	100	257	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 3, CH106		:

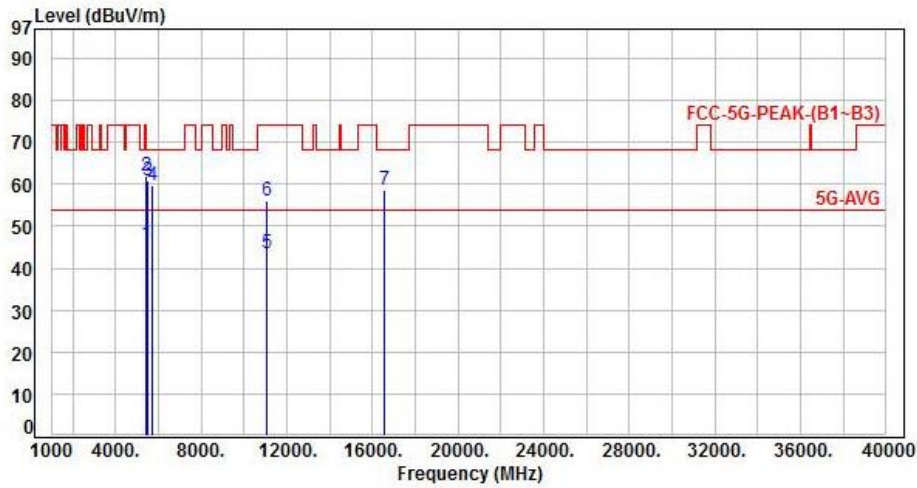


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.56	45.88	54.00	-8.12	Average	100	55	P
2	5460.00	6.32	55.62	61.94	74.00	-12.06	Peak	100	55	P
3	5470.00	6.34	54.48	60.82	68.20	-7.38	Peak	100	55	P
4	5725.00	6.32	53.29	59.61	68.20	-8.59	Peak	100	55	P
5	11060.00	13.90	29.77	43.67	54.00	-10.33	Average	100	251	P
6	11060.00	13.90	42.24	56.14	74.00	-17.86	Peak	100	251	P
7	16590.00	16.56	42.27	58.83	68.20	-9.37	Peak	100	56	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 3, CH122		:

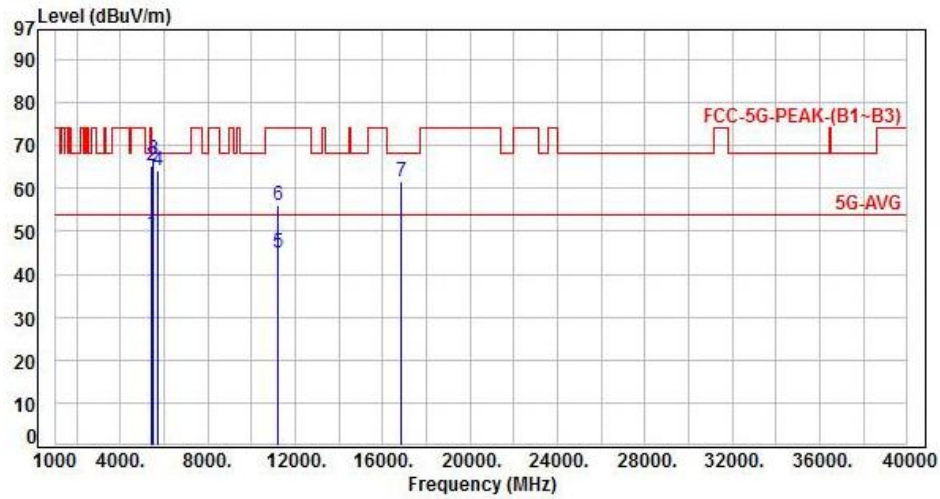


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	43.04	49.36	54.00	-4.64	Average	190	295	P
2	5460.00	6.32	58.97	65.29	74.00	-8.71	Peak	190	295	P
3	5470.00	6.34	60.50	66.84	68.20	-1.36	Peak	190	295	P
4	5725.00	6.32	57.99	64.31	68.20	-3.89	Peak	150	285	P
5	11220.00	14.11	30.84	44.95	54.00	-9.05	Average	300	271	P
6	11220.00	14.11	41.92	56.03	74.00	-17.97	Peak	300	271	P
7	16830.00	18.13	43.32	61.45	68.20	-6.75	Peak	115	240	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 3, CH122		:

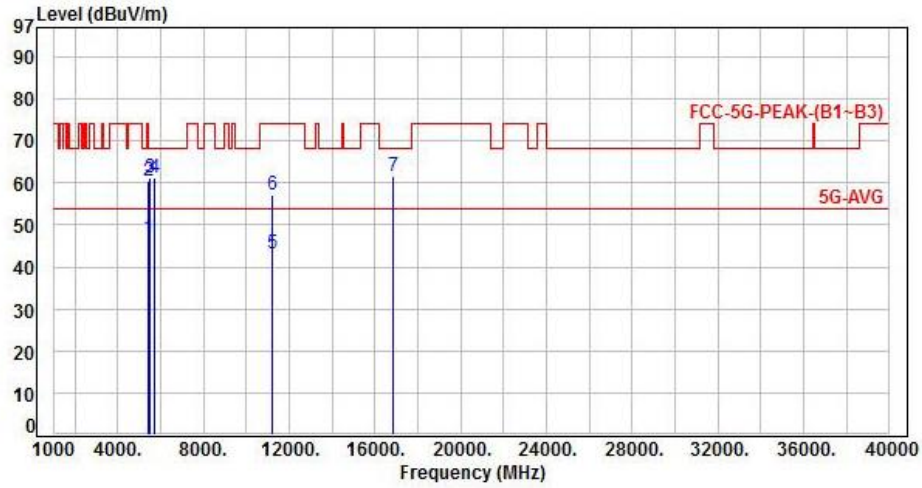


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.57	46.89	54.00	-7.11	Average	100	52	P
2	5460.00	6.32	54.26	60.58	74.00	-13.42	Peak	100	52	P
3	5470.00	6.34	54.78	61.12	68.20	-7.08	Peak	100	52	P
4	5725.00	6.32	54.91	61.23	68.20	-6.97	Peak	100	52	P
5	11220.00	14.11	29.16	43.27	54.00	-10.73	Average	100	152	P
6	11220.00	14.11	42.99	57.10	74.00	-16.90	Peak	100	152	P
7	16830.00	18.13	43.58	61.71	68.20	-6.49	Peak	100	55	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 3, CH100		:

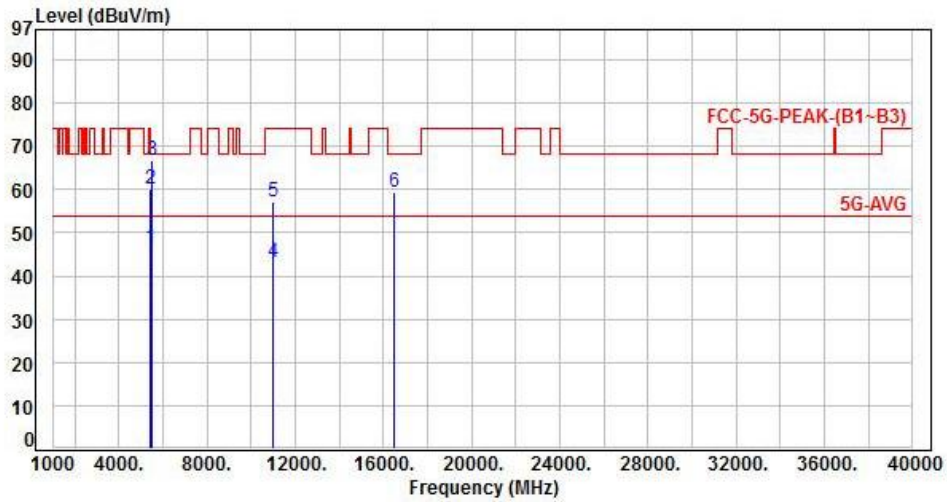


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.16	46.48	54.00	-7.52	Average	100	100	P
2	5460.00	6.32	53.76	60.08	74.00	-13.92	Peak	100	100	P
3	5470.00	6.34	60.43	66.77	68.20	-1.43	Peak	100	100	P
4	11000.00	13.81	29.25	43.06	54.00	-10.94	Average	298	280	P
5	11000.00	13.81	43.23	57.04	74.00	-16.96	Peak	298	280	P
6	16500.00	15.83	43.72	59.55	68.20	-8.65	Peak	100	253	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 3, CH100		:

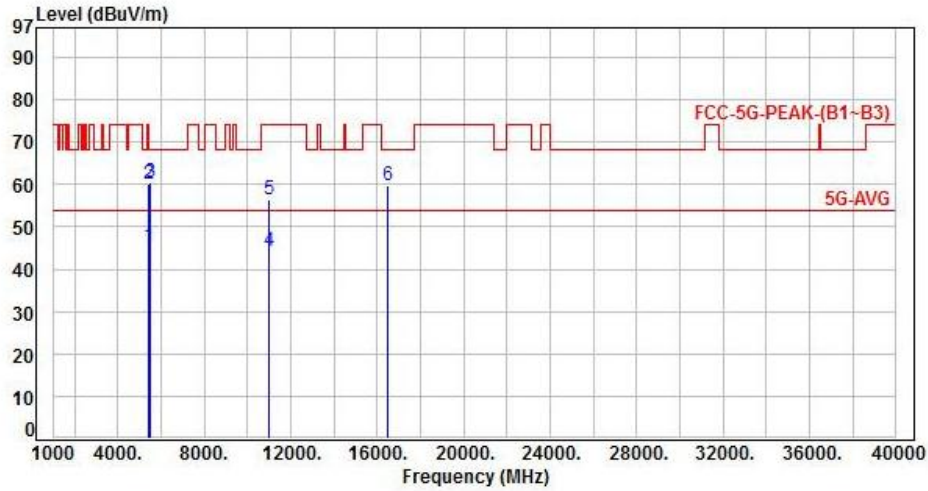


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	38.87	45.19	54.00	-8.81	Average	100	177	P
2	5460.00	6.32	53.67	59.99	74.00	-14.01	Peak	100	177	P
3	5470.00	6.34	54.30	60.64	68.20	-7.56	Peak	100	177	P
4	11000.00	13.81	30.39	44.20	54.00	-9.80	Average	100	150	P
5	11000.00	13.81	42.47	56.28	74.00	-17.72	Peak	100	150	P
6	16500.00	15.83	43.81	59.64	68.20	-8.56	Peak	100	51	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 3, CH120		

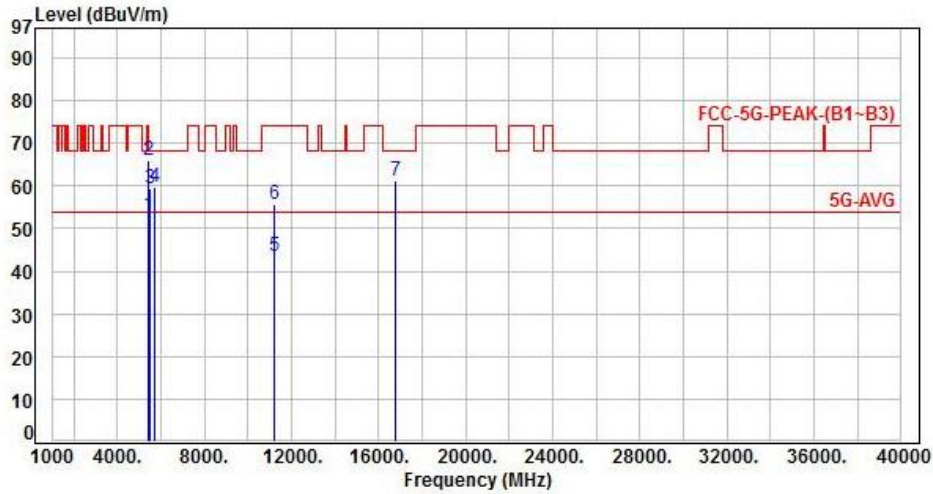


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	6.28	46.67	52.95	54.00	-1.05	Average	140	293	P
2	5440.00	6.28	59.63	65.91	74.00	-8.09	Peak	140	293	P
3	5470.00	6.34	53.10	59.44	68.20	-8.76	Peak	140	293	P
4	5725.00	6.32	53.31	59.63	68.20	-8.57	Peak	140	293	P
5	11200.00	14.09	29.52	43.61	54.00	-10.39	Average	300	280	P
6	11200.00	14.09	41.46	55.55	74.00	-18.45	Peak	300	280	P
7	16800.00	17.95	43.10	61.05	68.20	-7.15	Peak	100	241	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 3, CH120		:

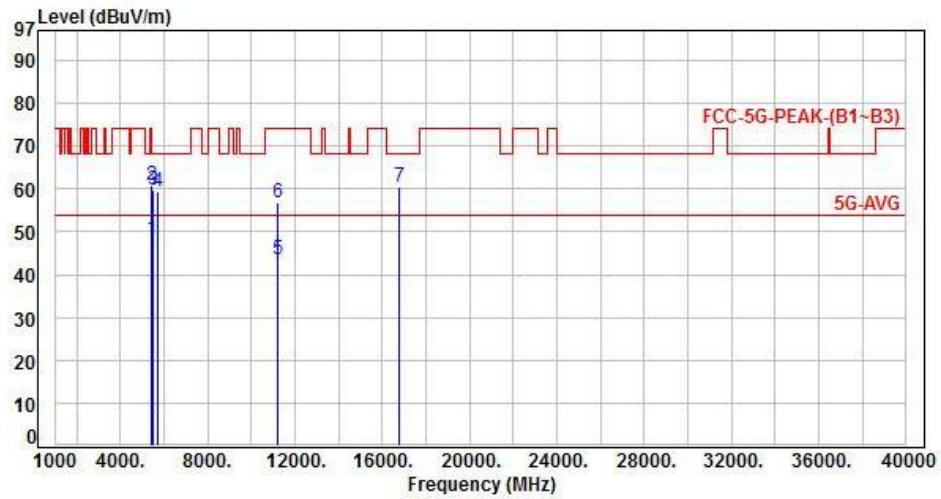


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	6.28	42.03	48.31	54.00	-5.69	Average	170	35	P
2	5440.00	6.28	54.74	61.02	74.00	-12.98	Peak	170	35	P
3	5470.00	6.34	53.56	59.90	68.20	-8.30	Peak	170	35	P
4	5725.00	6.32	52.88	59.20	68.20	-9.00	Peak	170	35	P
5	11200.00	14.09	29.35	43.44	54.00	-10.56	Average	100	140	P
6	11200.00	14.09	42.76	56.85	74.00	-17.15	Peak	100	140	P
7	16800.00	17.95	42.38	60.33	68.20	-7.87	Peak	100	52	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 3, CH140		:

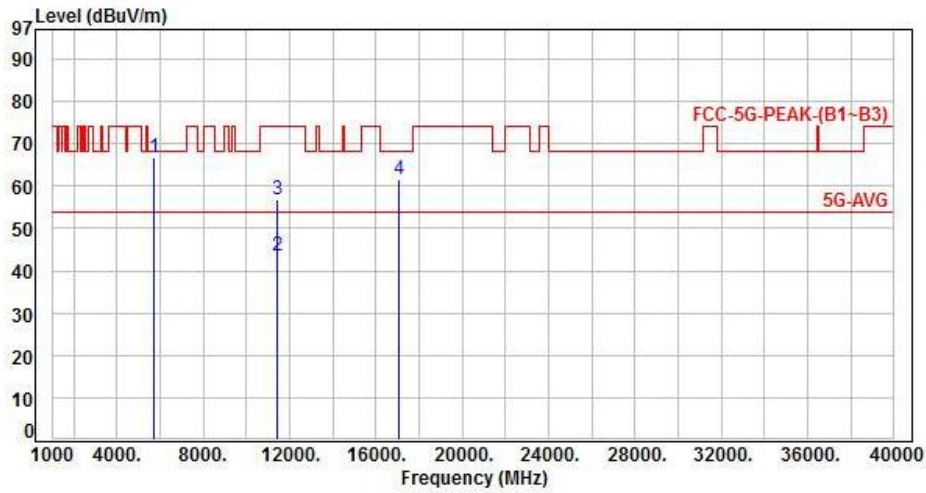


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	60.27	66.59	68.20	-1.61	Peak	255	50	P
2	11400.00	14.29	29.12	43.41	54.00	-10.59	Average	300	284	P
3	11400.00	14.29	42.55	56.84	74.00	-17.16	Peak	300	284	P
4	17100.00	19.40	42.37	61.77	68.20	-6.43	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 3, CH140		

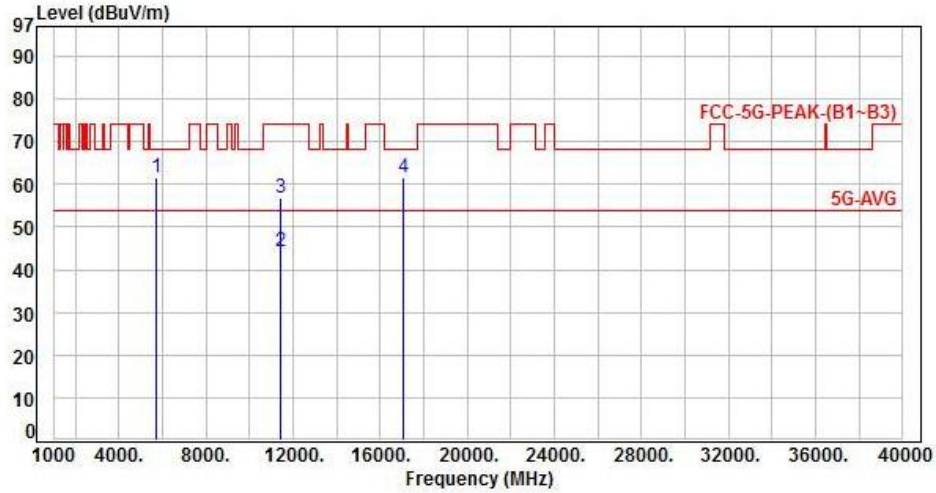


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	55.31	61.63	68.20	-6.57	Peak	100	174	P
2	11400.00	14.29	29.84	44.13	54.00	-9.87	Average	100	156	P
3	11400.00	14.29	42.38	56.67	74.00	-17.33	Peak	100	156	P
4	17100.00	19.40	42.11	61.51	68.20	-6.69	Peak	100	55	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 3, CH102		:

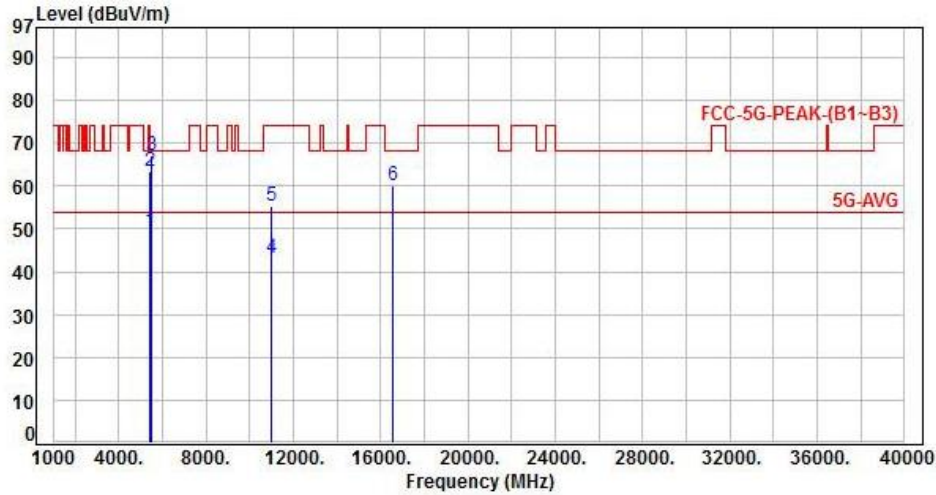


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	43.13	49.45	54.00	-4.55	Average	255	240	P
2	5460.00	6.32	57.04	63.36	74.00	-10.64	Peak	255	240	P
3	5470.00	6.34	60.67	67.01	68.20	-1.19	Peak	255	240	P
4	11020.00	13.84	29.27	43.11	54.00	-10.89	Average	300	275	P
5	11020.00	13.84	41.56	55.40	74.00	-18.60	Peak	300	275	P
6	16530.00	16.08	43.99	60.07	68.20	-8.13	Peak	100	257	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 3, CH102		:

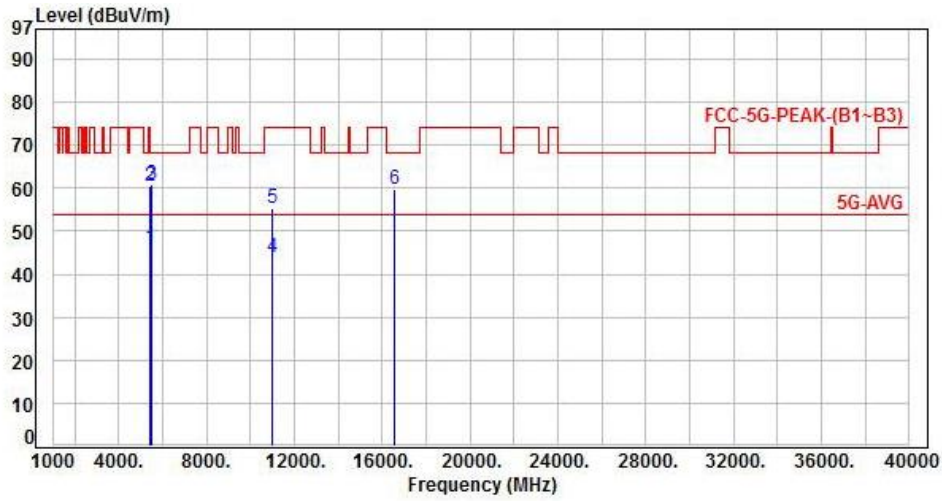


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.69	46.01	54.00	-7.99	Average	150	59	P
2	5460.00	6.32	54.04	60.36	74.00	-13.64	Peak	150	59	P
3	5470.00	6.34	54.52	60.86	68.20	-7.34	Peak	150	59	P
4	11020.00	13.84	30.00	43.84	54.00	-10.16	Average	100	155	P
5	11020.00	13.84	41.59	55.43	74.00	-18.57	Peak	100	155	P
6	16530.00	16.08	43.64	59.72	68.20	-8.48	Peak	100	63	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 3, CH118		:

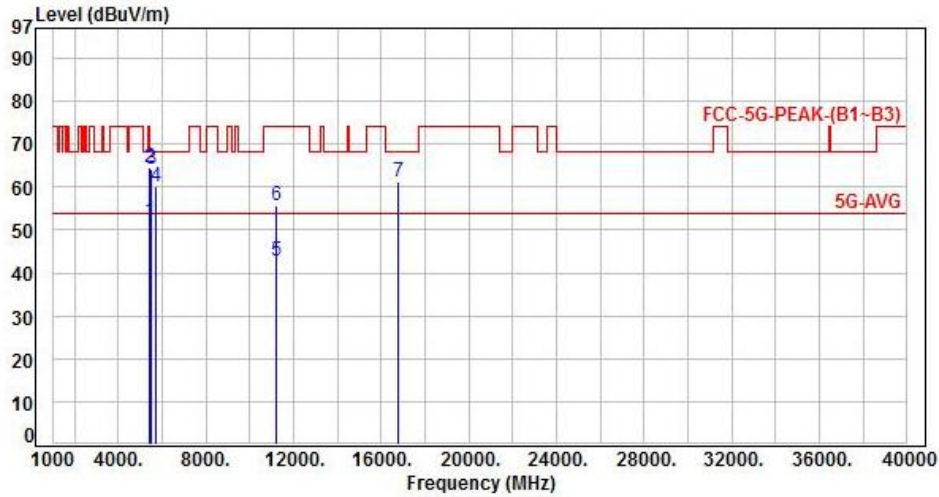


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5430.00	6.25	45.77	52.02	54.00	-1.98	Average	115	293	P
2	5430.00	6.25	58.11	64.36	74.00	-9.64	Peak	115	293	P
3	5470.00	6.34	57.74	64.08	68.20	-4.12	Peak	115	293	P
4	5725.00	6.32	53.89	60.21	68.20	-7.99	Peak	110	255	P
5	11180.00	14.07	28.85	42.92	54.00	-11.08	Average	290	249	P
6	11180.00	14.07	41.53	55.60	74.00	-18.40	Peak	290	249	P
7	16770.00	17.65	43.47	61.12	68.20	-7.08	Peak	100	260	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 3, CH118		:

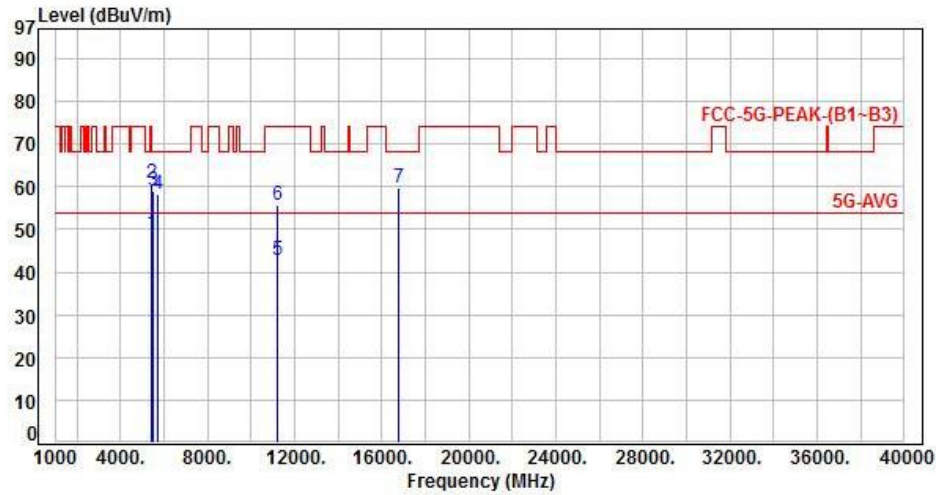


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5430.00	6.25	42.72	48.97	54.00	-5.03	Average	150	42	P
2	5430.00	6.25	54.61	60.86	74.00	-13.14	Peak	150	42	P
3	5470.00	6.34	52.60	58.94	68.20	-9.26	Peak	150	42	P
4	5725.00	6.32	52.11	58.43	68.20	-9.77	Peak	150	42	P
5	11180.00	14.07	28.73	42.80	54.00	-11.20	Average	100	149	P
6	11180.00	14.07	41.57	55.64	74.00	-18.36	Peak	100	149	P
7	16770.00	17.65	42.14	59.79	68.20	-8.41	Peak	150	43	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 3, CH134		:

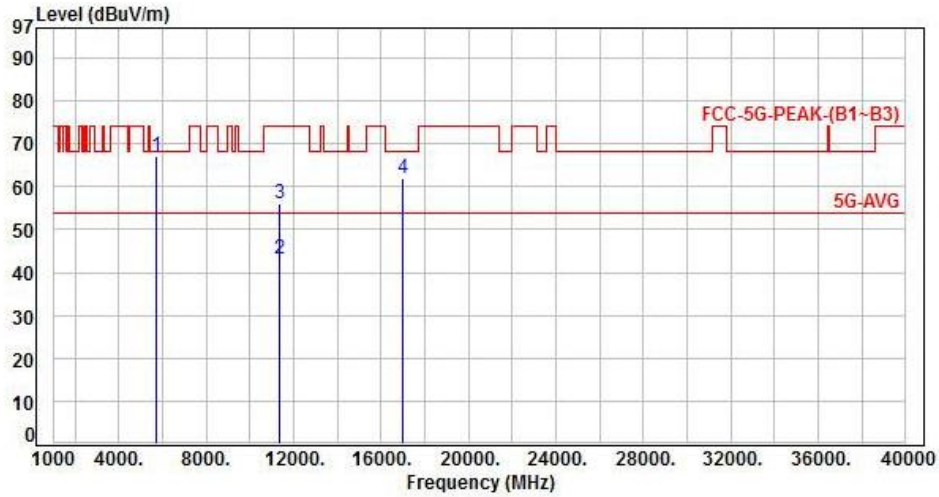


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	60.75	67.07	68.20	-1.13	Peak	120	290	P
2	11340.00	14.20	28.95	43.15	54.00	-10.85	Average	300	276	P
3	11340.00	14.20	42.01	56.21	74.00	-17.79	Peak	300	276	P
4	17010.00	19.09	42.97	62.06	68.20	-6.14	Peak	100	253	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 3, CH134		:

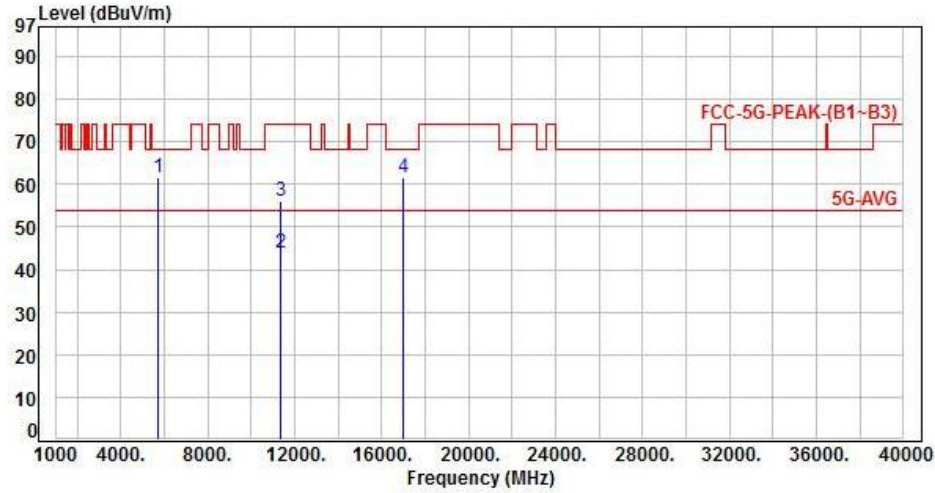


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	6.32	55.27	61.59	68.20	-6.61	Peak	100	163	P
2	11340.00	14.20	29.77	43.97	54.00	-10.03	Average	100	244	P
3	11340.00	14.20	42.03	56.23	74.00	-17.77	Peak	100	244	P
4	17010.00	19.09	42.36	61.45	68.20	-6.75	Peak	100	61	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 3, CH106		:

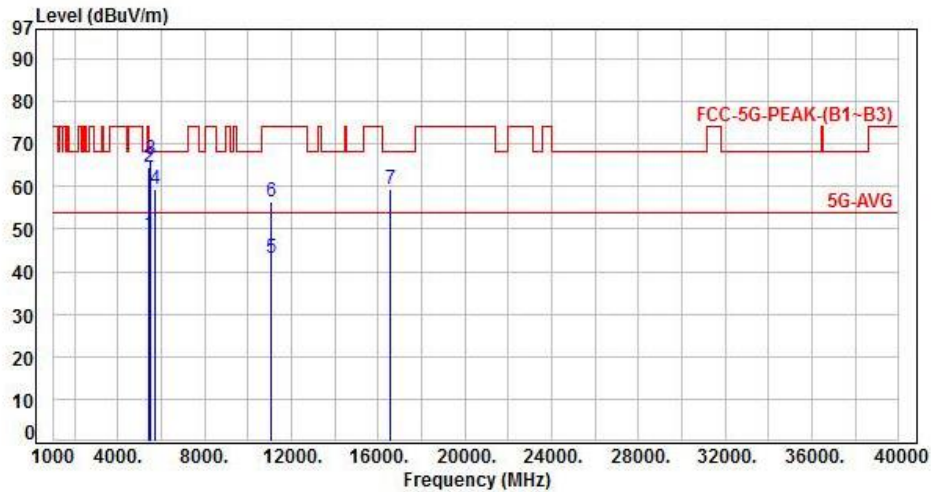


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	42.49	48.81	54.00	-5.19	Average	200	290	P
2	5460.00	6.32	58.35	64.67	74.00	-9.33	Peak	200	290	P
3	5470.00	6.34	60.22	66.56	68.20	-1.64	Peak	200	290	P
4	5725.00	6.32	53.06	59.38	68.20	-8.82	Peak	200	290	P
5	11060.00	13.90	29.28	43.18	54.00	-10.82	Average	300	275	P
6	11060.00	13.90	42.53	56.43	74.00	-17.57	Peak	300	275	P
7	16590.00	16.56	42.76	59.32	68.20	-8.88	Peak	100	258	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 3, CH106		:

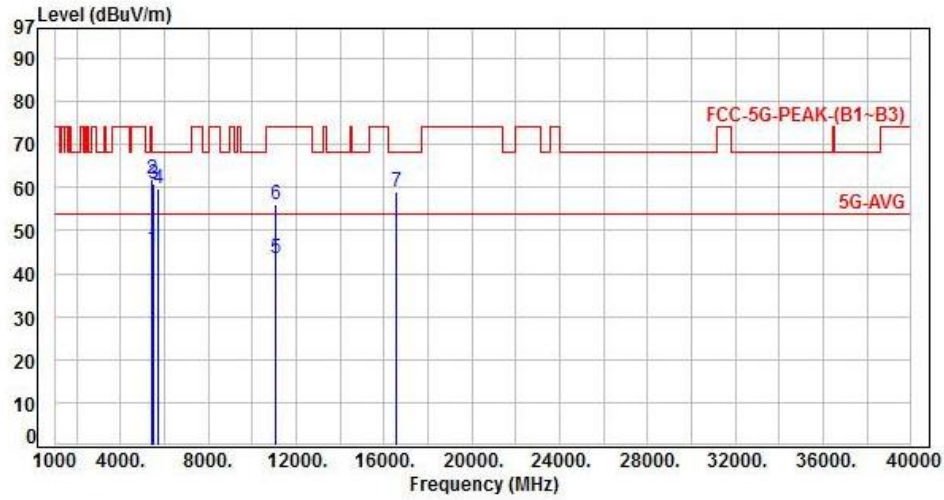


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.56	45.88	54.00	-8.12	Average	100	55	P
2	5460.00	6.32	55.62	61.94	74.00	-12.06	Peak	100	55	P
3	5470.00	6.34	54.48	60.82	68.20	-7.38	Peak	100	55	P
4	5725.00	6.32	53.29	59.61	68.20	-8.59	Peak	100	55	P
5	11060.00	13.90	29.61	43.51	54.00	-10.49	Average	100	247	P
6	11060.00	13.90	42.18	56.08	74.00	-17.92	Peak	100	247	P
7	16590.00	16.56	42.36	58.92	68.20	-9.28	Peak	100	53	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 3, CH122		:

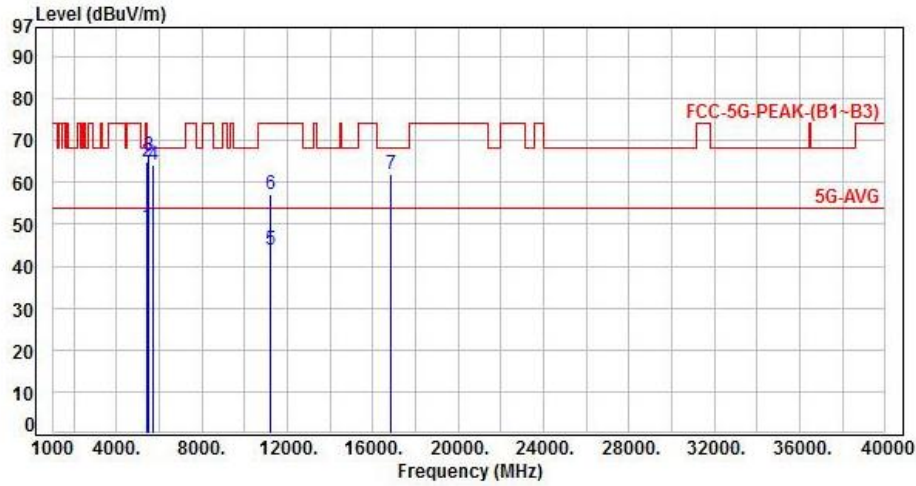


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	42.94	49.26	54.00	-4.74	Average	130	290	P
2	5460.00	6.32	58.69	65.01	74.00	-8.99	Peak	130	290	P
3	5470.00	6.34	60.23	66.57	68.20	-1.63	Peak	130	290	P
4	5725.00	6.32	58.03	64.35	68.20	-3.85	Peak	165	290	P
5	11220.00	14.11	29.83	43.94	54.00	-10.06	Average	280	275	P
6	11220.00	14.11	43.23	57.34	74.00	-16.66	Peak	280	275	P
7	16830.00	18.13	43.82	61.95	68.20	-6.25	Peak	120	245	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 3, CH122		:

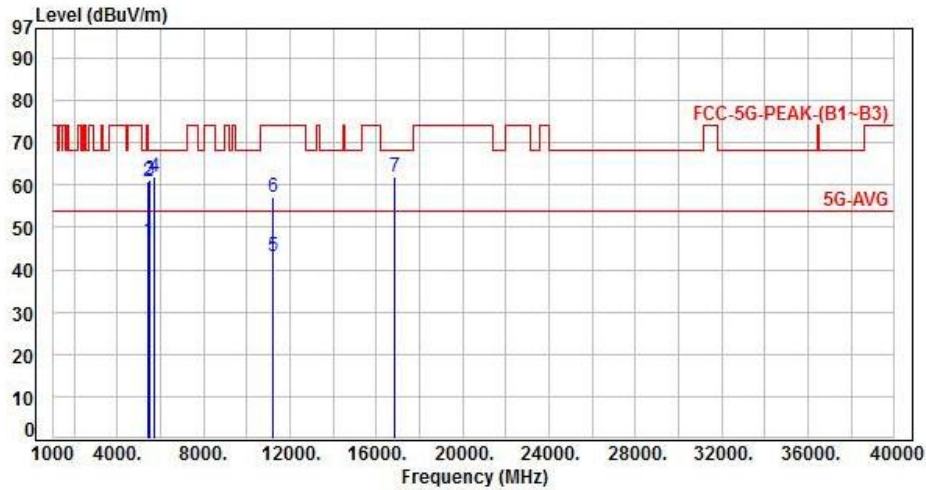


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.70	47.02	54.00	-6.98	Average	100	55	P
2	5460.00	6.32	54.52	60.84	74.00	-13.16	Peak	100	55	P
3	5470.00	6.34	54.97	61.31	68.20	-6.89	Peak	100	55	P
4	5725.00	6.32	55.60	61.92	68.20	-6.28	Peak	100	55	P
5	11220.00	14.11	29.13	43.24	54.00	-10.76	Average	100	135	P
6	11220.00	14.11	43.20	57.31	74.00	-16.69	Peak	100	135	P
7	16830.00	18.13	43.81	61.94	68.20	-6.26	Peak	100	60	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH149		

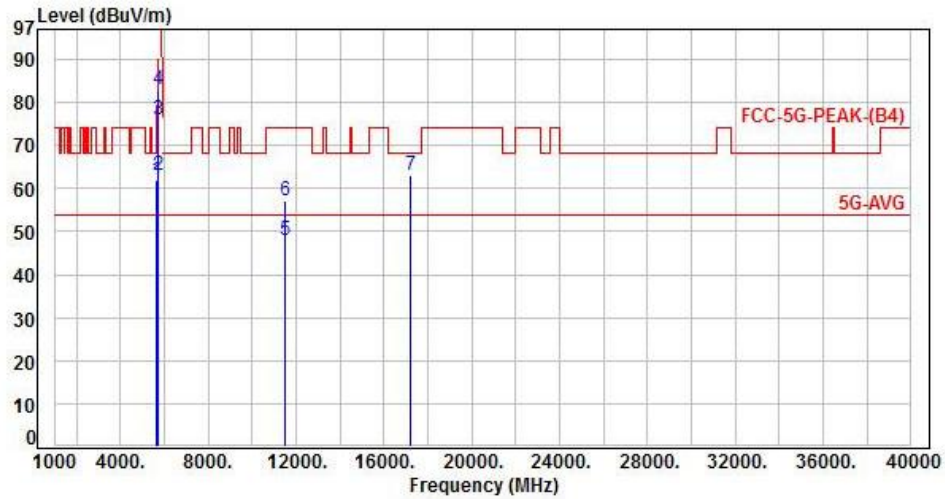


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	55.86	62.12	68.20	-6.08	Peak	100	295	P
2	5700.00	6.30	56.69	62.99	105.20	-42.21	Peak	100	295	P
3	5720.00	6.31	69.65	75.96	110.80	-34.84	Peak	100	295	P
4	5725.00	6.32	76.58	82.90	122.20	-39.30	Peak	100	295	P
5	11490.00	14.60	33.47	48.07	54.00	-5.93	Average	345	305	P
6	11490.00	14.60	42.45	57.05	74.00	-16.95	Peak	345	305	P
7	17235.00	20.19	42.72	62.91	68.20	-5.29	Peak	100	245	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH149		:

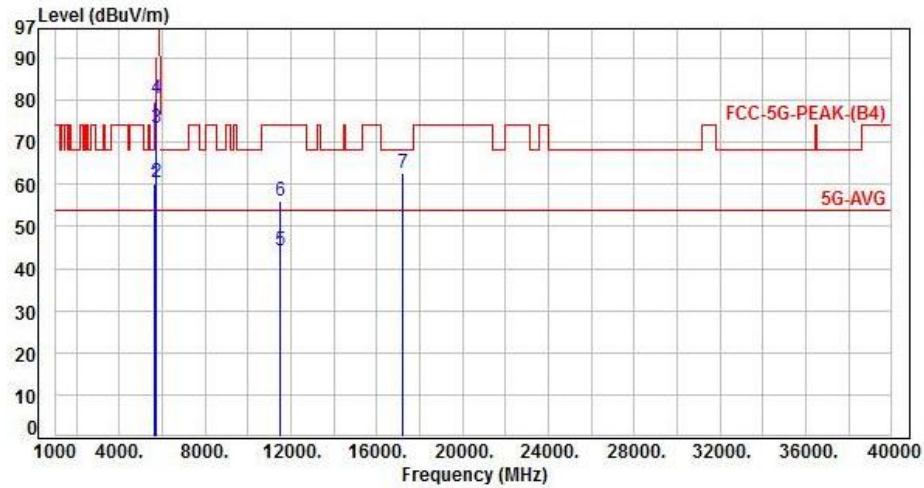


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	53.80	60.06	68.20	-8.14	Peak	100	35	P
2	5700.00	6.30	54.03	60.33	105.20	-44.87	Peak	100	35	P
3	5720.00	6.31	66.98	73.29	110.80	-37.51	Peak	100	35	P
4	5725.00	6.32	73.93	80.25	122.20	-41.95	Peak	100	35	P
5	11490.00	14.60	29.52	44.12	54.00	-9.88	Average	140	320	P
6	11490.00	14.60	41.46	56.06	74.00	-17.94	Peak	140	320	P
7	17235.00	20.19	42.47	62.66	68.20	-5.54	Peak	100	35	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH157		:

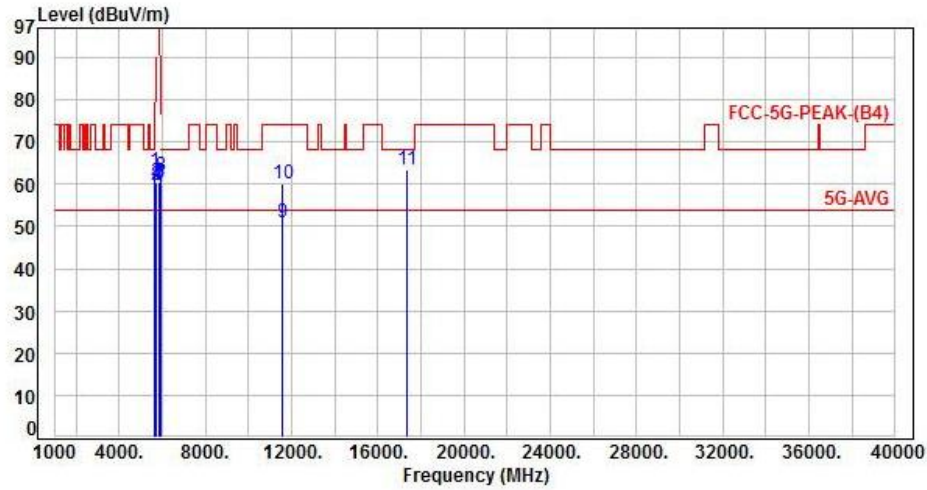


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	56.64	62.90	68.20	-5.30	Peak	100	295	P
2	5700.00	6.30	53.33	59.63	105.20	-45.57	Peak	100	295	P
3	5720.00	6.31	54.18	60.49	110.80	-50.31	Peak	100	295	P
4	5725.00	6.32	53.65	59.97	122.20	-62.23	Peak	100	295	P
5	5850.00	6.41	53.58	59.99	122.20	-62.21	Peak	100	250	P
6	5855.00	6.43	54.14	60.57	110.80	-50.23	Peak	100	250	P
7	5875.00	6.53	53.25	59.78	105.20	-45.42	Peak	100	250	P
8	5925.00	6.70	55.25	61.95	68.20	-6.25	Peak	100	250	P
9	11570.00	14.83	36.14	50.97	54.00	-3.03	Average	367	305	P
10	11570.00	14.83	45.14	59.97	74.00	-14.03	Peak	367	305	P
11	17355.00	20.84	42.66	63.50	68.20	-4.70	Peak	100	256	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH157		:

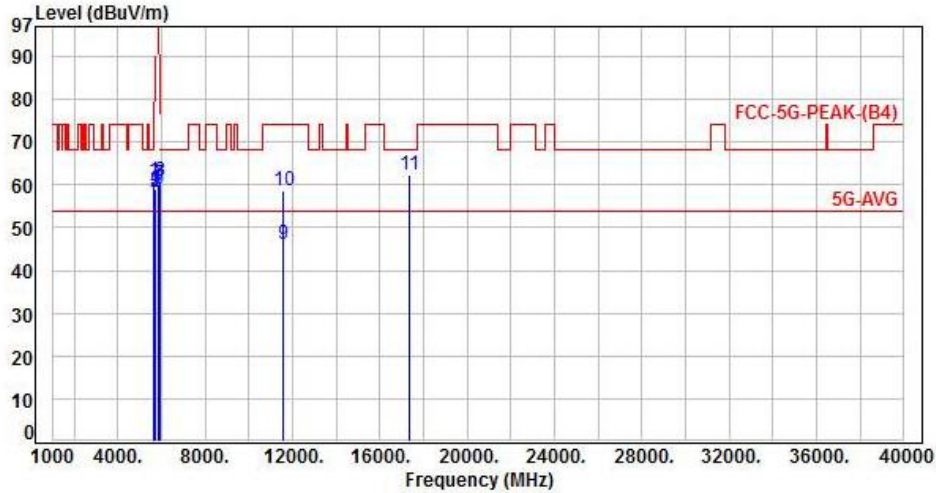


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	54.52	60.78	68.20	-7.42	Peak	100	35	P
2	5700.00	6.30	52.05	58.35	105.20	-46.85	Peak	100	35	P
3	5720.00	6.31	52.38	58.69	110.80	-52.11	Peak	100	35	P
4	5725.00	6.32	52.64	58.96	122.20	-63.24	Peak	100	35	P
5	5850.00	6.41	52.48	58.89	122.20	-63.31	Peak	100	35	P
6	5855.00	6.43	53.71	60.14	110.80	-50.66	Peak	100	35	P
7	5875.00	6.53	53.61	60.14	105.20	-45.06	Peak	100	35	P
8	5925.00	6.70	54.21	60.91	68.20	-7.29	Peak	100	35	P
9	11570.00	14.83	31.43	46.26	54.00	-7.74	Average	117	320	P
10	11570.00	14.83	43.64	58.47	74.00	-15.53	Peak	117	320	P
11	17355.00	20.84	41.66	62.50	68.20	-5.70	Peak	100	36	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH165		:

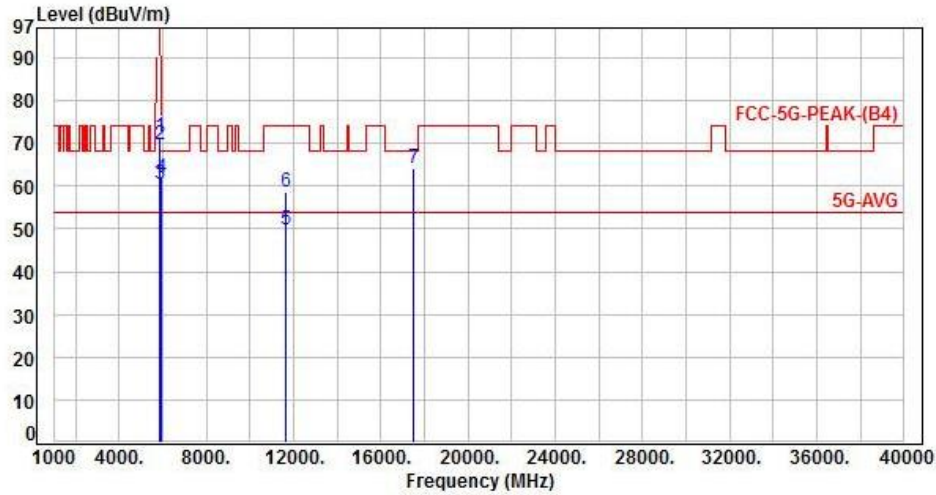


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	6.41	65.06	71.47	122.20	-50.73	Peak	100	250	P
2	5855.00	6.43	63.14	69.57	110.80	-41.23	Peak	100	250	P
3	5875.00	6.53	54.12	60.65	105.20	-44.55	Peak	100	250	P
4	5925.00	6.70	55.10	61.80	68.20	-6.40	Peak	100	250	P
5	11650.00	15.01	34.83	49.84	54.00	-4.16	Average	368	305	P
6	11650.00	15.01	43.53	58.54	74.00	-15.46	Peak	368	305	P
7	17475.00	21.75	42.34	64.09	68.20	-4.11	Peak	100	248	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH165		:

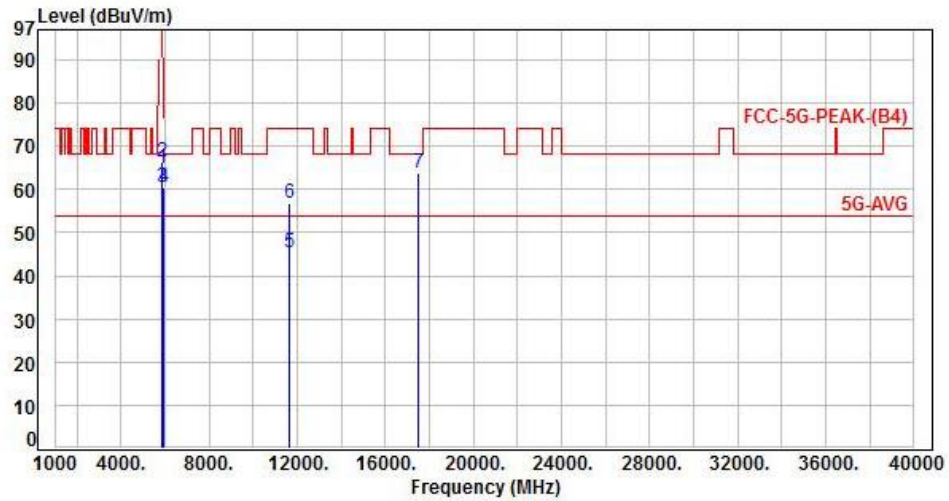


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	6.41	58.48	64.89	122.20	-57.31	Peak	100	35	P
2	5855.00	6.43	60.00	66.43	110.80	-44.37	Peak	100	35	P
3	5875.00	6.53	53.77	60.30	105.20	-44.90	Peak	100	35	P
4	5925.00	6.70	53.95	60.65	68.20	-7.55	Peak	100	35	P
5	11650.00	15.01	30.39	45.40	54.00	-8.60	Average	100	320	P
6	11650.00	15.01	41.69	56.70	74.00	-17.30	Peak	100	320	P
7	17475.00	21.75	42.06	63.81	68.20	-4.39	Peak	100	33	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, CH149		:

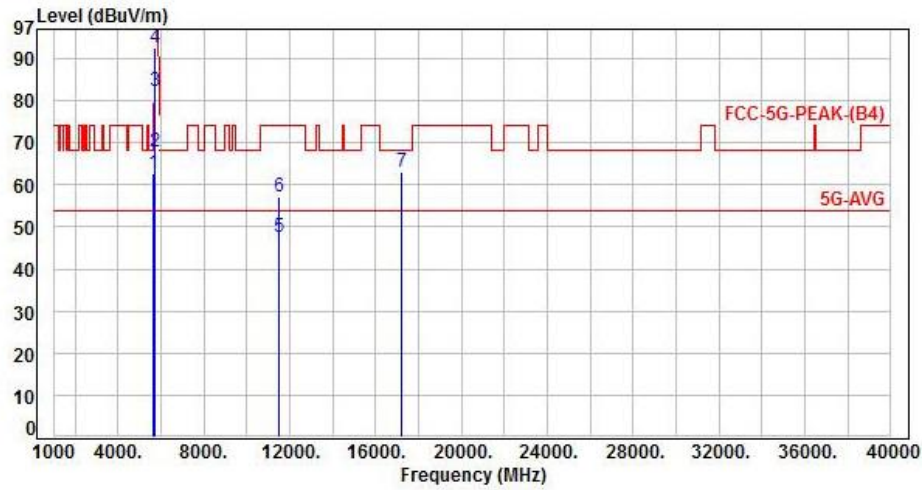


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	56.43	62.69	68.20	-5.51	Peak	130	295	P
2	5700.00	6.30	61.67	67.97	105.20	-37.23	Peak	130	295	P
3	5720.00	6.31	75.78	82.09	110.80	-28.71	Peak	130	295	P
4	5725.00	6.32	86.21	92.53	122.20	-29.67	Peak	130	295	P
5	11490.00	14.60	33.12	47.72	54.00	-6.28	Average	346	305	P
6	11490.00	14.60	42.62	57.22	74.00	-16.78	Peak	346	305	P
7	17235.00	20.19	43.05	63.24	68.20	-4.96	Peak	100	251	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, CH149		:

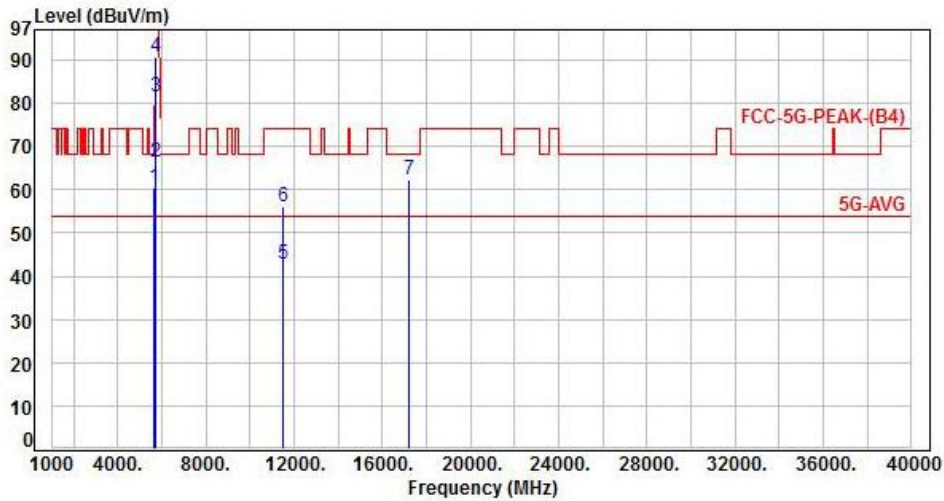


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	54.05	60.31	68.20	-7.89	Peak	100	35	P
2	5700.00	6.30	60.13	66.43	105.20	-38.77	Peak	100	35	P
3	5720.00	6.31	75.05	81.36	110.80	-29.44	Peak	100	35	P
4	5725.00	6.32	84.47	90.79	122.20	-31.41	Peak	100	35	P
5	11490.00	14.60	28.21	42.81	54.00	-11.19	Average	100	140	P
6	11490.00	14.60	41.58	56.18	74.00	-17.82	Peak	100	140	P
7	17235.00	20.19	42.32	62.51	68.20	-5.69	Peak	100	25	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, CH157		:

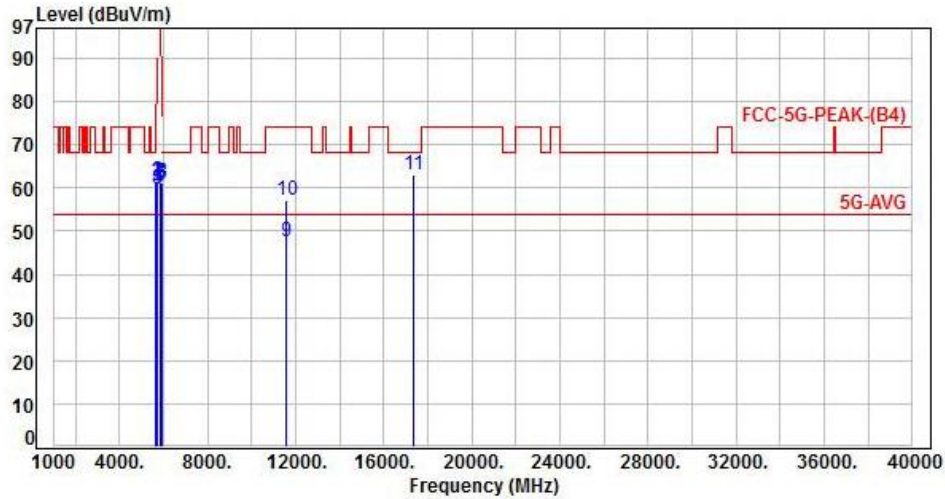


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	55.50	61.76	68.20	-6.44	Peak	140	290	P
2	5700.00	6.30	55.18	61.48	105.20	-43.72	Peak	140	290	P
3	5720.00	6.31	53.41	59.72	110.80	-51.08	Peak	140	290	P
4	5725.00	6.32	53.59	59.91	122.20	-62.29	Peak	140	290	P
5	5850.00	6.41	54.21	60.62	122.20	-61.58	Peak	100	245	P
6	5855.00	6.43	54.34	60.77	110.80	-50.03	Peak	100	245	P
7	5875.00	6.53	54.68	61.21	105.20	-43.99	Peak	100	245	P
8	5925.00	6.70	54.37	61.07	68.20	-7.13	Peak	100	245	P
9	11570.00	14.83	32.82	47.65	54.00	-6.35	Average	348	305	P
10	11570.00	14.83	42.46	57.29	74.00	-16.71	Peak	348	305	P
11	17355.00	20.84	42.14	62.98	68.20	-5.22	Peak	100	245	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, CH157		:

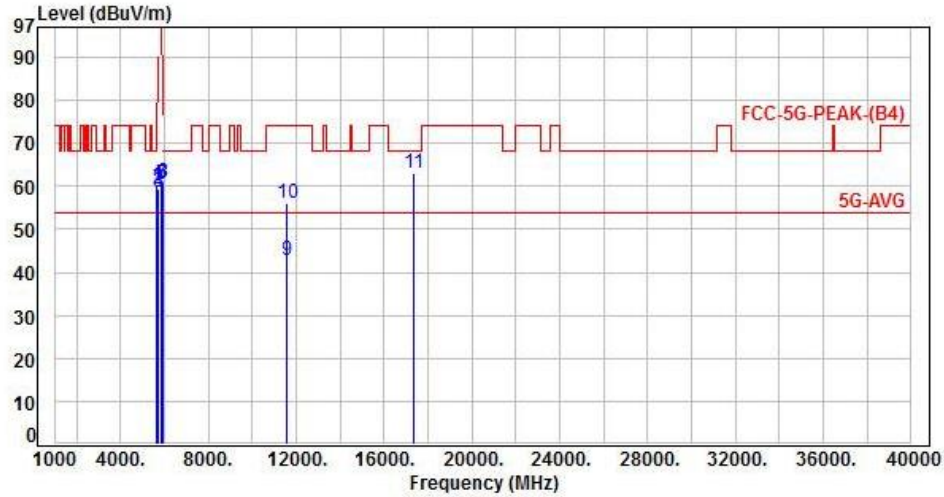


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	53.91	60.17	68.20	-8.03	Peak	100	35	P
2	5700.00	6.30	53.14	59.44	105.20	-45.76	Peak	100	35	P
3	5720.00	6.31	52.18	58.49	110.80	-52.31	Peak	100	35	P
4	5725.00	6.32	52.15	58.47	122.20	-63.73	Peak	100	35	P
5	5850.00	6.41	54.21	60.62	122.20	-61.58	Peak	100	35	P
6	5855.00	6.43	53.97	60.40	110.80	-50.40	Peak	100	35	P
7	5875.00	6.53	53.81	60.34	105.20	-44.86	Peak	100	35	P
8	5925.00	6.70	54.19	60.89	68.20	-7.31	Peak	100	35	P
9	11570.00	14.83	28.01	42.84	54.00	-11.16	Average	100	140	P
10	11570.00	14.83	41.23	56.06	74.00	-17.94	Peak	100	140	P
11	17355.00	20.84	42.06	62.90	68.20	-5.30	Peak	100	33	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, CH165		:

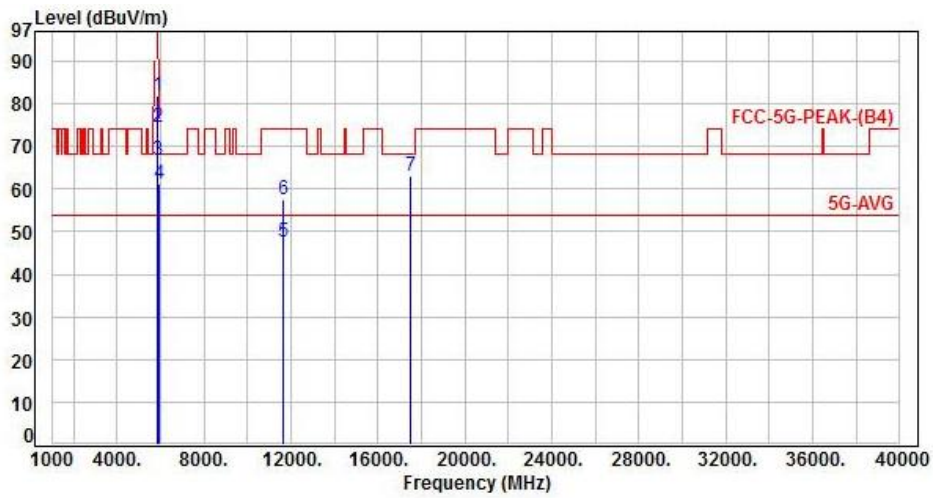


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	6.41	75.45	81.86	122.20	-40.34	Peak	120	245	P
2	5855.00	6.43	67.92	74.35	110.80	-36.45	Peak	120	245	P
3	5875.00	6.53	60.29	66.82	105.20	-38.38	Peak	120	245	P
4	5925.00	6.70	54.71	61.41	68.20	-6.79	Peak	120	245	P
5	11650.00	15.01	32.62	47.63	54.00	-6.37	Average	344	305	P
6	11650.00	15.01	42.48	57.49	74.00	-16.51	Peak	344	305	P
7	17475.00	21.75	41.32	63.07	68.20	-5.13	Peak	100	250	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, CH165		:

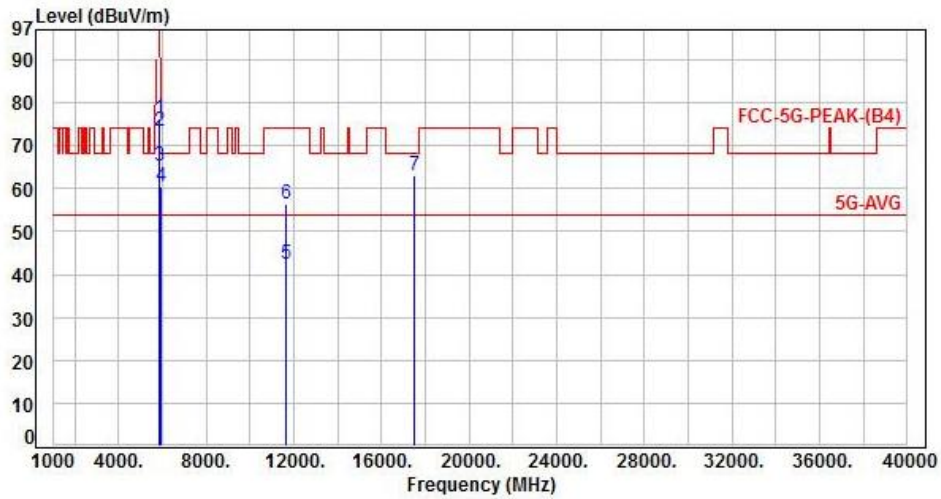


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	6.41	69.80	76.21	122.20	-45.99	Peak	100	40	P
2	5855.00	6.43	67.13	73.56	110.80	-37.24	Peak	100	40	P
3	5875.00	6.53	58.67	65.20	105.20	-40.00	Peak	100	40	P
4	5925.00	6.70	53.97	60.67	68.20	-7.53	Peak	100	40	P
5	11650.00	15.01	27.56	42.57	54.00	-11.43	Average	100	140	P
6	11650.00	15.01	41.36	56.37	74.00	-17.63	Peak	100	140	P
7	17475.00	21.75	41.37	63.12	68.20	-5.08	Peak	100	35	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 4, CH151		:

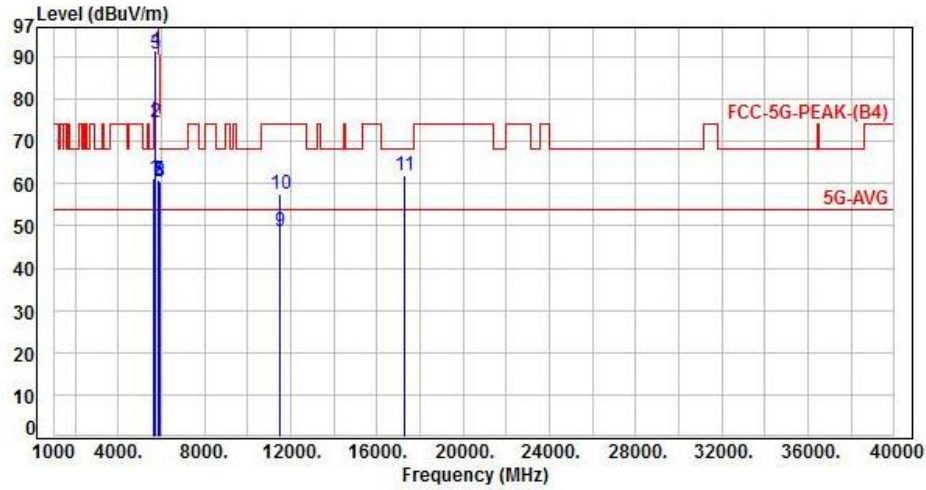


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	55.05	61.31	68.20	-6.89	Peak	110	295	P
2	5700.00	6.30	68.05	74.35	105.20	-30.85	Peak	110	295	P
3	5720.00	6.31	84.43	90.74	110.80	-20.06	Peak	110	295	P
4	5725.00	6.32	85.28	91.60	122.20	-30.60	Peak	110	295	P
5	5850.00	6.41	54.24	60.65	122.20	-61.55	Peak	100	240	P
6	5855.00	6.43	54.51	60.94	110.80	-49.86	Peak	100	240	P
7	5875.00	6.53	54.15	60.68	105.20	-44.52	Peak	100	240	P
8	5925.00	6.70	53.84	60.54	68.20	-7.66	Peak	100	240	P
9	11510.00	14.65	34.04	48.69	54.00	-5.31	Average	370	305	P
10	11510.00	14.65	43.03	57.68	74.00	-16.32	Peak	370	305	P
11	17265.00	20.33	41.70	62.03	68.20	-6.17	Peak	100	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 4, CH151		:

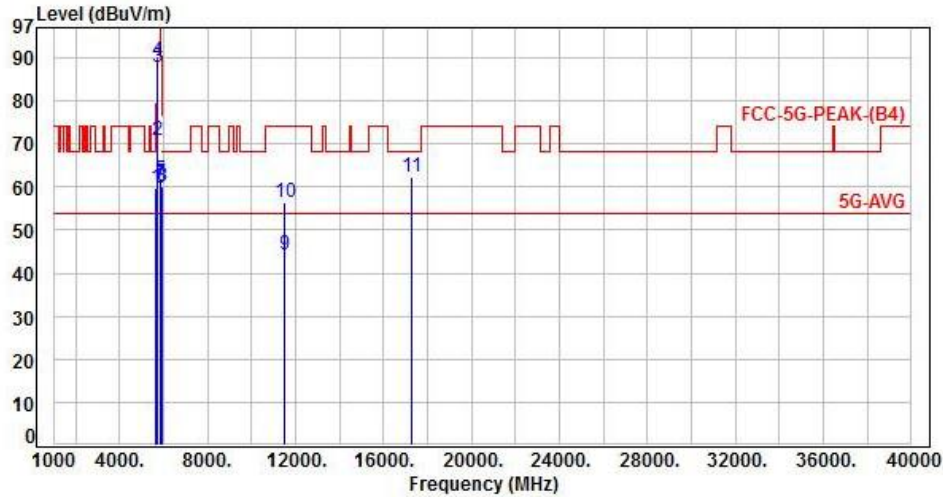


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	53.66	59.92	68.20	-8.28	Peak	100	35	P
2	5700.00	6.30	64.59	70.89	105.20	-34.31	Peak	100	35	P
3	5720.00	6.31	81.51	87.82	110.80	-22.98	Peak	100	35	P
4	5725.00	6.32	82.97	89.29	122.20	-32.91	Peak	100	35	P
5	5850.00	6.41	55.15	61.56	122.20	-60.64	Peak	100	35	P
6	5855.00	6.43	53.23	59.66	110.80	-51.14	Peak	100	35	P
7	5875.00	6.53	54.20	60.73	105.20	-44.47	Peak	100	35	P
8	5925.00	6.70	53.46	60.16	68.20	-8.04	Peak	100	35	P
9	11510.00	14.65	29.60	44.25	54.00	-9.75	Average	110	320	P
10	11510.00	14.65	41.85	56.50	74.00	-17.50	Peak	110	320	P
11	17265.00	20.33	41.99	62.32	68.20	-5.88	Peak	100	35	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 4, CH159		

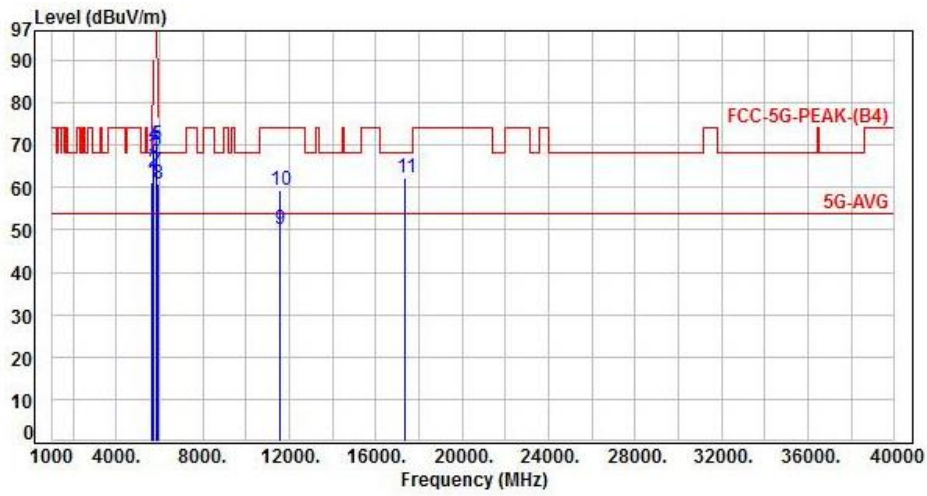


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	54.96	61.22	68.20	-6.98	Peak	125	295	P
2	5700.00	6.30	57.65	63.95	105.20	-41.25	Peak	125	295	P
3	5720.00	6.31	60.90	67.21	110.80	-43.59	Peak	125	295	P
4	5725.00	6.32	63.68	70.00	122.20	-52.20	Peak	125	295	P
5	5850.00	6.41	63.65	70.06	122.20	-52.14	Peak	220	240	P
6	5855.00	6.43	62.31	68.74	110.80	-42.06	Peak	220	240	P
7	5875.00	6.53	57.11	63.64	105.20	-41.56	Peak	220	240	P
8	5925.00	6.70	53.98	60.68	68.20	-7.52	Peak	220	240	P
9	11590.00	14.89	35.37	50.26	54.00	-3.74	Average	356	305	P
10	11590.00	14.89	44.42	59.31	74.00	-14.69	Peak	356	305	P
11	17385.00	21.02	41.40	62.42	68.20	-5.78	Peak	100	255	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 4, CH159		:

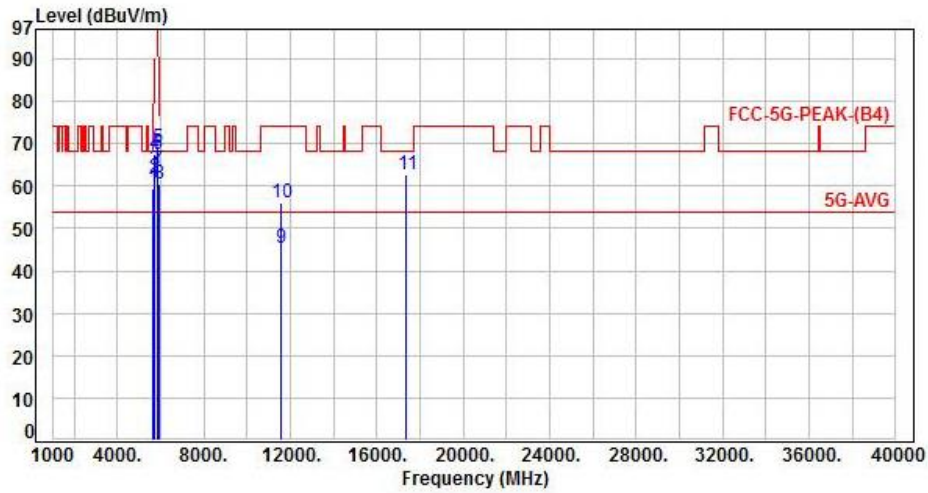


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	53.27	59.53	68.20	-8.67	Peak	100	35	P
2	5700.00	6.30	55.61	61.91	105.20	-43.29	Peak	100	35	P
3	5720.00	6.31	57.55	63.86	110.80	-46.94	Peak	100	35	P
4	5725.00	6.32	61.11	67.43	122.20	-54.77	Peak	100	35	P
5	5850.00	6.41	62.45	68.86	122.20	-53.34	Peak	100	40	P
6	5855.00	6.43	61.17	67.60	110.80	-43.20	Peak	100	40	P
7	5875.00	6.53	57.45	63.98	105.20	-41.22	Peak	100	40	P
8	5925.00	6.70	53.86	60.56	68.20	-7.64	Peak	100	40	P
9	11590.00	14.89	30.52	45.41	54.00	-8.59	Average	100	320	P
10	11590.00	14.89	41.30	56.19	74.00	-17.81	Peak	100	320	P
11	17385.00	21.02	41.73	62.75	68.20	-5.45	Peak	100	30	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 4, CH155		:

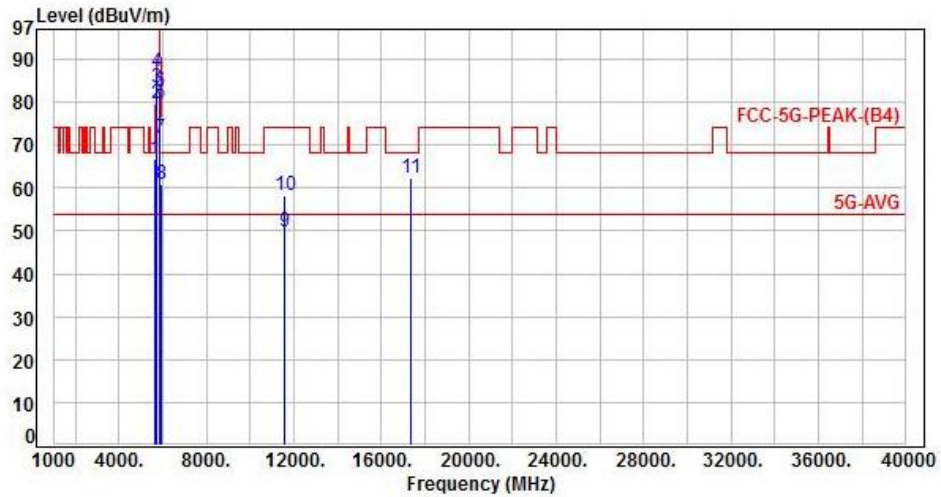


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	60.49	66.75	68.20	-1.45	Peak	100	290	P
2	5700.00	6.30	73.48	79.78	105.20	-25.42	Peak	100	290	P
3	5720.00	6.31	76.98	83.29	110.80	-27.51	Peak	100	290	P
4	5725.00	6.32	80.88	87.20	122.20	-35.00	Peak	100	290	P
5	5850.00	6.41	73.08	79.49	122.20	-42.71	Peak	100	250	P
6	5855.00	6.43	76.28	82.71	110.80	-28.09	Peak	100	250	P
7	5875.00	6.53	64.89	71.42	105.20	-33.78	Peak	100	250	P
8	5925.00	6.70	54.18	60.88	68.20	-7.32	Peak	100	250	P
9	11550.00	14.77	34.97	49.74	54.00	-4.26	Average	359	305	P
10	11550.00	14.77	43.49	58.26	74.00	-15.74	Peak	359	305	P
11	17325.00	20.64	41.64	62.28	68.20	-5.92	Peak	100	255	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 4, CH155		:

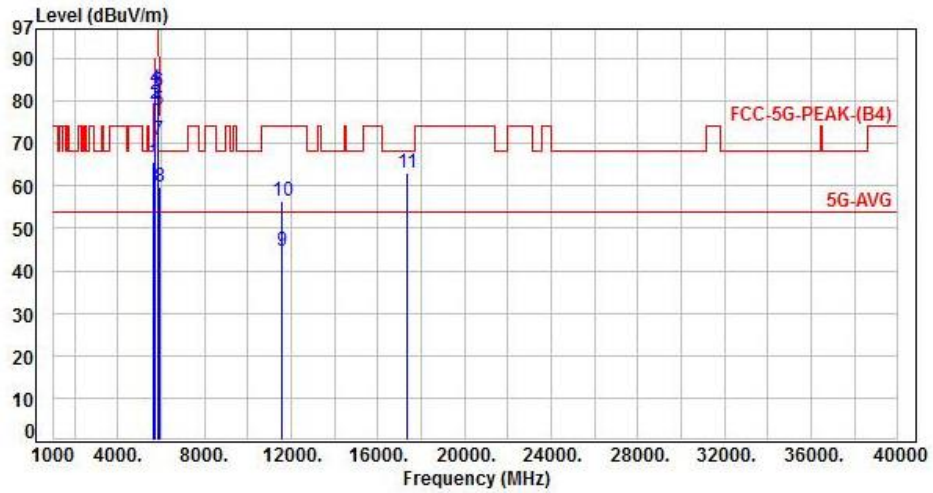


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	59.50	65.76	68.20	-2.44	Peak	100	35	P
2	5700.00	6.30	73.06	79.36	105.20	-25.84	Peak	100	35	P
3	5720.00	6.31	75.37	81.68	110.80	-29.12	Peak	100	35	P
4	5725.00	6.32	76.52	82.84	122.20	-39.36	Peak	100	35	P
5	5850.00	6.41	71.34	77.75	122.20	-44.45	Peak	100	35	P
6	5855.00	6.43	75.80	82.23	110.80	-28.57	Peak	100	35	P
7	5875.00	6.53	64.39	70.92	105.20	-34.28	Peak	100	35	P
8	5925.00	6.70	53.22	59.92	68.20	-8.28	Peak	100	35	P
9	11550.00	14.77	29.97	44.74	54.00	-9.26	Average	130	320	P
10	11550.00	14.77	41.83	56.60	74.00	-17.40	Peak	130	320	P
11	17325.00	20.64	42.57	63.21	68.20	-4.99	Peak	100	38	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 4, CH149		:

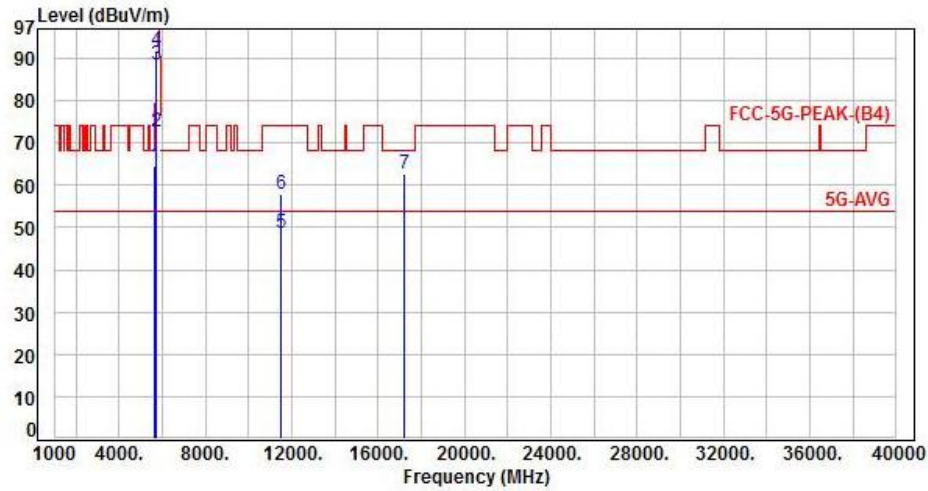


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	58.17	64.43	68.20	-3.77	Peak	100	295	P
2	5700.00	6.30	66.21	72.51	105.20	-32.69	Peak	100	295	P
3	5720.00	6.31	82.16	88.47	110.80	-22.33	Peak	100	295	P
4	5725.00	6.32	85.47	91.79	122.20	-30.41	Peak	100	295	P
5	11490.00	14.60	33.91	48.51	54.00	-5.49	Average	354	305	P
6	11490.00	14.60	43.28	57.88	74.00	-16.12	Peak	354	305	P
7	17235.00	20.19	42.55	62.74	68.20	-5.46	Peak	100	253	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, CH149		:

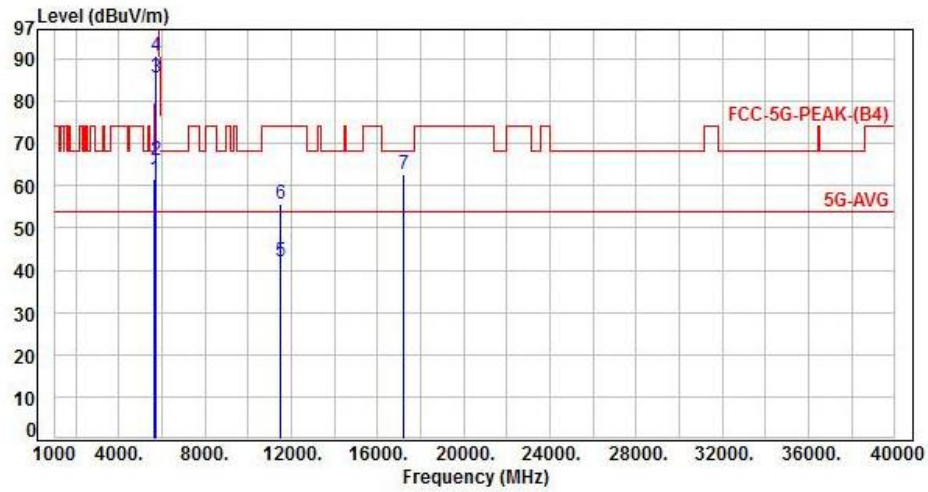


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	55.48	61.74	68.20	-6.46	Peak	100	35	P
2	5700.00	6.30	59.60	65.90	105.20	-39.30	Peak	100	35	P
3	5720.00	6.31	79.14	85.45	110.80	-25.35	Peak	100	35	P
4	5725.00	6.32	84.45	90.77	122.20	-31.43	Peak	100	35	P
5	11490.00	14.60	27.48	42.08	54.00	-11.92	Average	100	140	P
6	11490.00	14.60	41.09	55.69	74.00	-18.31	Peak	100	140	P
7	17235.00	20.19	42.59	62.78	68.20	-5.42	Peak	100	35	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 4, CH157		:

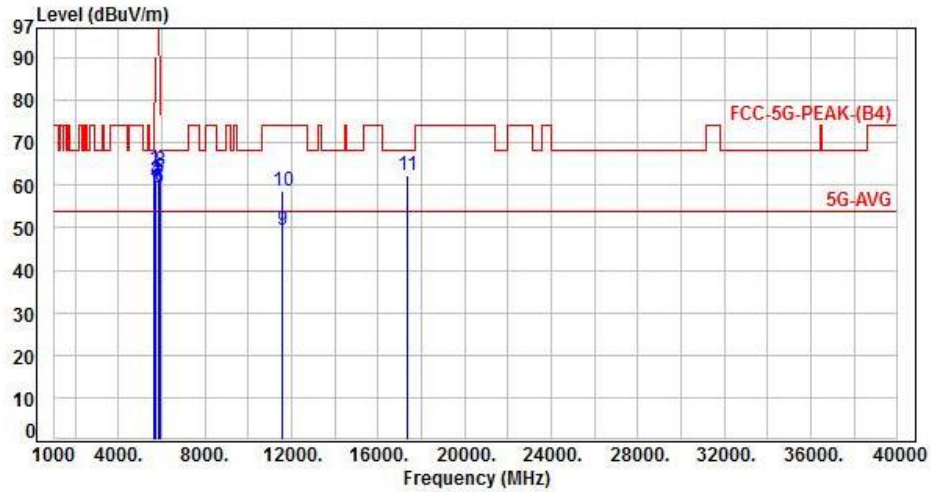


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	57.39	63.65	68.20	-4.55	Peak	100	295	P
2	5700.00	6.30	55.05	61.35	105.20	-43.85	Peak	100	295	P
3	5720.00	6.31	54.38	60.69	110.80	-50.11	Peak	100	295	P
4	5725.00	6.32	55.04	61.36	122.20	-60.84	Peak	100	295	P
5	5850.00	6.41	55.03	61.44	122.20	-60.76	Peak	100	250	P
6	5855.00	6.43	53.12	59.55	110.80	-51.25	Peak	100	250	P
7	5875.00	6.53	53.45	59.98	105.20	-45.22	Peak	100	250	P
8	5925.00	6.70	56.77	63.47	68.20	-4.73	Peak	100	250	P
9	11570.00	14.83	34.58	49.41	54.00	-4.59	Average	367	305	P
10	11570.00	14.83	43.63	58.46	74.00	-15.54	Peak	367	305	P
11	17355.00	20.84	41.61	62.45	68.20	-5.75	Peak	100	250	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, CH157		:

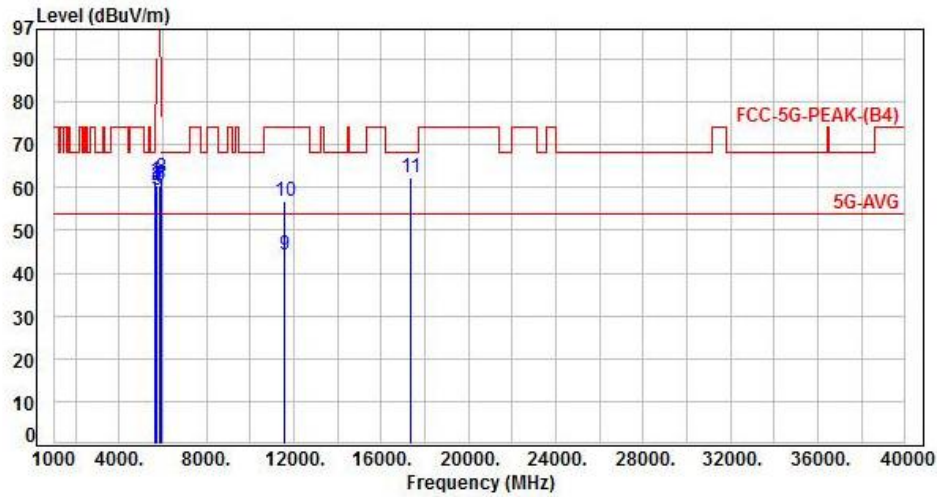

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	55.43	61.69	68.20	-6.51	Peak	100	35	P
2	5700.00	6.30	54.09	60.39	105.20	-44.81	Peak	100	35	P
3	5720.00	6.31	53.11	59.42	110.80	-51.38	Peak	100	35	P
4	5725.00	6.32	54.18	60.50	122.20	-61.70	Peak	100	35	P
5	5850.00	6.41	54.17	60.58	122.20	-61.62	Peak	100	35	P
6	5855.00	6.43	54.19	60.62	110.80	-50.18	Peak	100	35	P
7	5875.00	6.53	53.60	60.13	105.20	-45.07	Peak	100	35	P
8	5925.00	6.70	55.53	62.23	68.20	-5.97	Peak	100	35	P
9	11570.00	14.83	29.57	44.40	54.00	-9.60	Average	100	140	P
10	11570.00	14.83	41.85	56.68	74.00	-17.32	Peak	100	140	P
11	17355.00	20.84	41.52	62.36	68.20	-5.84	Peak	100	30	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor