




Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 4, CH165		:

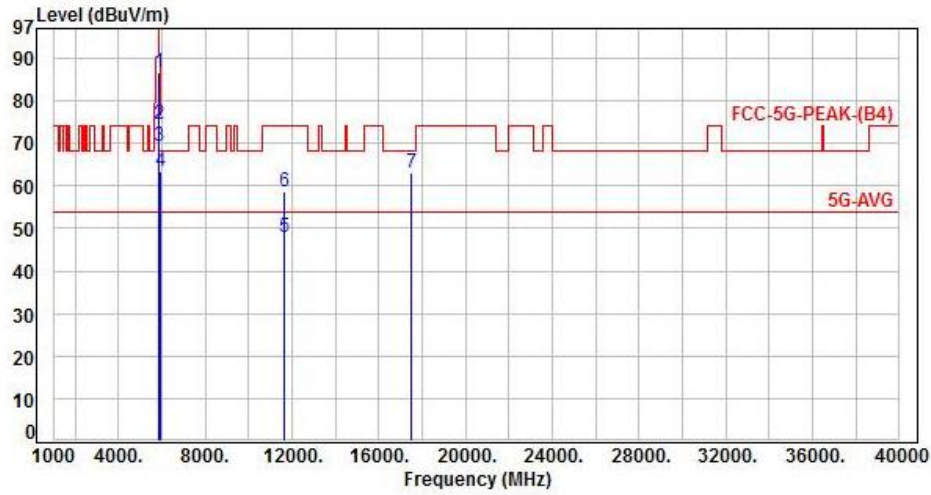


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	6.41	80.19	86.60	122.20	-35.60	Peak	100	250	P
2	5855.00	6.43	67.91	74.34	110.80	-36.46	Peak	100	250	P
3	5875.00	6.53	62.68	69.21	105.20	-35.99	Peak	100	250	P
4	5925.00	6.70	56.66	63.36	68.20	-4.84	Peak	100	250	P
5	11650.00	15.01	33.11	48.12	54.00	-5.88	Average	344	305	P
6	11650.00	15.01	43.56	58.57	74.00	-15.43	Peak	344	305	P
7	17475.00	21.75	41.30	63.05	68.20	-5.15	Peak	100	247	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, CH165		:

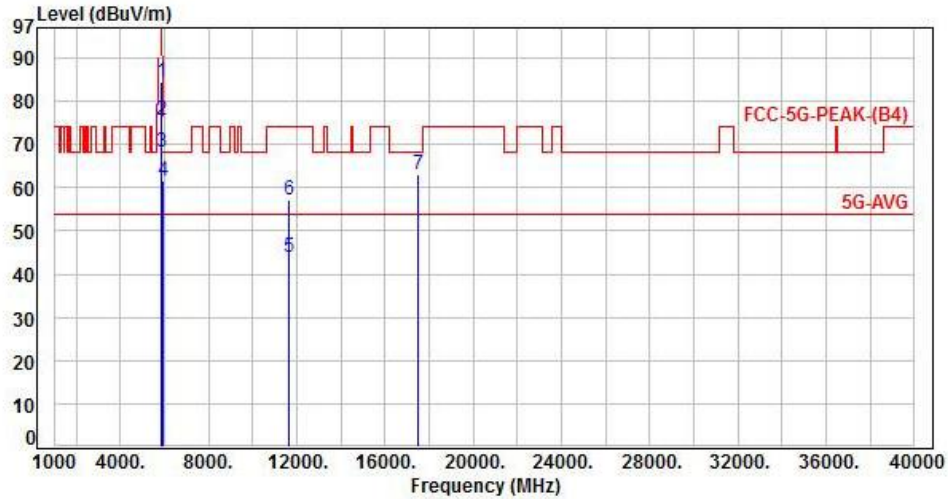


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	6.41	78.13	84.54	122.20	-37.66	Peak	100	35	P
2	5855.00	6.43	69.33	75.76	110.80	-35.04	Peak	100	35	P
3	5875.00	6.53	61.58	68.11	105.20	-37.09	Peak	100	35	P
4	5925.00	6.70	54.73	61.43	68.20	-6.77	Peak	100	35	P
5	11650.00	15.01	28.83	43.84	54.00	-10.16	Average	100	140	P
6	11650.00	15.01	41.98	56.99	74.00	-17.01	Peak	100	140	P
7	17475.00	21.75	41.27	63.02	68.20	-5.18	Peak	100	34	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 4, CH151		:

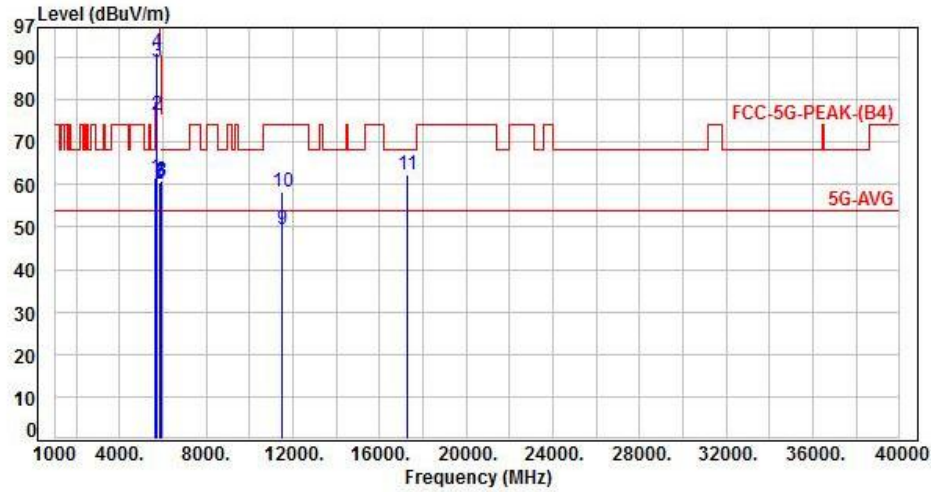


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	55.39	61.65	68.20	-6.55	Peak	145	295	P
2	5700.00	6.30	70.09	76.39	105.20	-28.81	Peak	145	295	P
3	5720.00	6.31	82.59	88.90	110.80	-21.90	Peak	145	295	P
4	5725.00	6.32	84.82	91.14	122.20	-31.06	Peak	145	295	P
5	5850.00	6.41	53.87	60.28	122.20	-61.92	Peak	100	250	P
6	5855.00	6.43	53.96	60.39	110.80	-50.41	Peak	100	250	P
7	5875.00	6.53	54.12	60.65	105.20	-44.55	Peak	100	250	P
8	5925.00	6.70	54.29	60.99	68.20	-7.21	Peak	100	250	P
9	11510.00	14.65	34.69	49.34	54.00	-4.66	Average	362	305	P
10	11510.00	14.65	43.47	58.12	74.00	-15.88	Peak	362	305	P
11	17265.00	20.33	42.17	62.50	68.20	-5.70	Peak	100	253	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 4, CH151		:

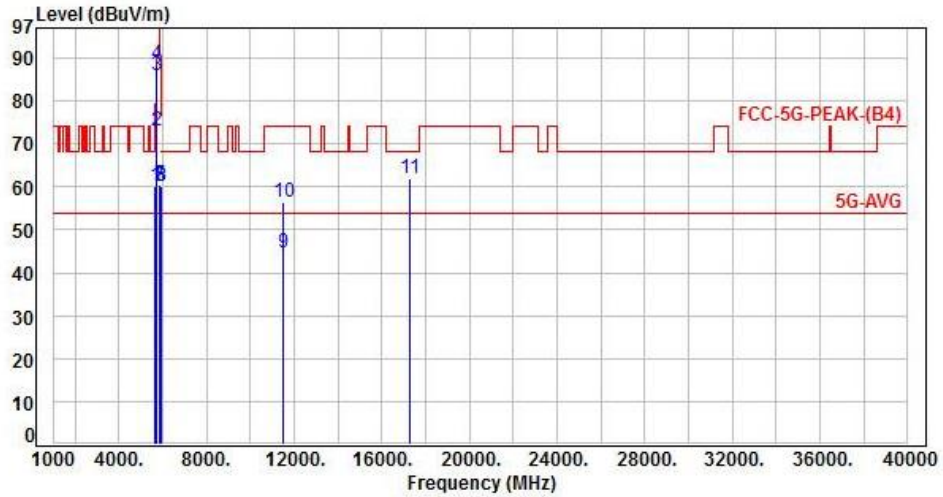


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	53.96	60.22	68.20	-7.98	Peak	100	33	P
2	5700.00	6.30	66.75	73.05	105.20	-32.15	Peak	100	33	P
3	5720.00	6.31	79.52	85.83	110.80	-24.97	Peak	100	33	P
4	5725.00	6.32	82.31	88.63	122.20	-33.57	Peak	100	33	P
5	5850.00	6.41	53.62	60.03	122.20	-62.17	Peak	100	33	P
6	5855.00	6.43	53.77	60.20	110.80	-50.60	Peak	100	33	P
7	5875.00	6.53	53.83	60.36	105.20	-44.84	Peak	100	33	P
8	5925.00	6.70	53.43	60.13	68.20	-8.07	Peak	100	33	P
9	11510.00	14.65	29.82	44.47	54.00	-9.53	Average	130	320	P
10	11510.00	14.65	41.60	56.25	74.00	-17.75	Peak	130	320	P
11	17265.00	20.33	41.73	62.06	68.20	-6.14	Peak	100	30	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 4, CH159		

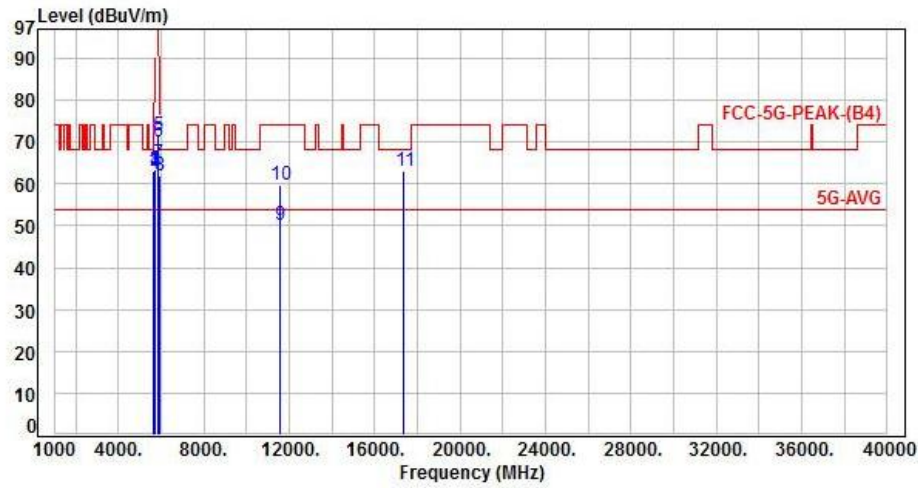

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	56.71	62.97	68.20	-5.23	Peak	100	295	P
2	5700.00	6.30	56.83	63.13	105.20	-42.07	Peak	100	295	P
3	5720.00	6.31	56.96	63.27	110.80	-47.53	Peak	100	295	P
4	5725.00	6.32	56.74	63.06	122.20	-59.14	Peak	100	295	P
5	5850.00	6.41	65.06	71.47	122.20	-50.73	Peak	100	250	P
6	5855.00	6.43	63.53	69.96	110.80	-40.84	Peak	100	250	P
7	5875.00	6.53	58.45	64.98	105.20	-40.22	Peak	100	250	P
8	5925.00	6.70	55.43	62.13	68.20	-6.07	Peak	100	250	P
9	11590.00	14.89	35.42	50.31	54.00	-3.69	Average	356	305	P
10	11590.00	14.89	44.96	59.85	74.00	-14.15	Peak	356	305	P
11	17385.00	21.02	42.08	63.10	68.20	-5.10	Peak	100	255	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 4, CH159		:

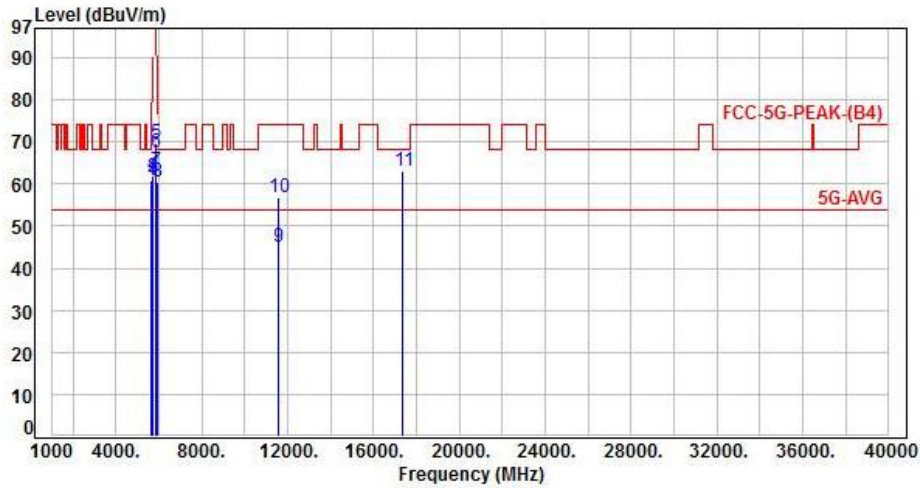


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	54.62	60.88	68.20	-7.32	Peak	100	35	P
2	5700.00	6.30	55.27	61.57	105.20	-43.63	Peak	100	35	P
3	5720.00	6.31	55.38	61.69	110.80	-49.11	Peak	100	35	P
4	5725.00	6.32	55.47	61.79	122.20	-60.41	Peak	100	35	P
5	5850.00	6.41	63.45	69.86	122.20	-52.34	Peak	100	35	P
6	5855.00	6.43	61.03	67.46	110.80	-43.34	Peak	100	35	P
7	5875.00	6.53	56.39	62.92	105.20	-42.28	Peak	100	35	P
8	5925.00	6.70	53.65	60.35	68.20	-7.85	Peak	100	35	P
9	11590.00	14.89	30.05	44.94	54.00	-9.06	Average	100	320	P
10	11590.00	14.89	42.02	56.91	74.00	-17.09	Peak	100	320	P
11	17385.00	21.02	41.87	62.89	68.20	-5.31	Peak	100	36	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 4, CH155		:

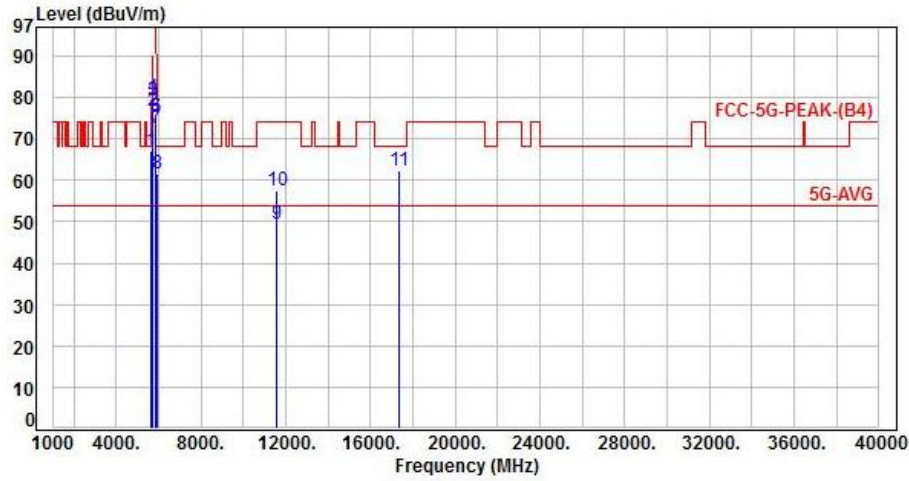


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	60.74	67.00	68.20	-1.20	Peak	100	295	P
2	5700.00	6.30	70.53	76.83	105.20	-28.37	Peak	100	295	P
3	5720.00	6.31	72.98	79.29	110.80	-31.51	Peak	100	295	P
4	5725.00	6.32	73.59	79.91	122.20	-42.29	Peak	100	295	P
5	5850.00	6.41	68.87	75.28	122.20	-46.92	Peak	100	250	P
6	5855.00	6.43	68.98	75.41	110.80	-35.39	Peak	100	250	P
7	5875.00	6.53	66.04	72.57	105.20	-32.63	Peak	100	250	P
8	5925.00	6.70	55.01	61.71	68.20	-6.49	Peak	100	250	P
9	11550.00	14.77	34.67	49.44	54.00	-4.56	Average	360	305	P
10	11550.00	14.77	42.62	57.39	74.00	-16.61	Peak	360	305	P
11	17325.00	20.64	41.79	62.43	68.20	-5.77	Peak	100	253	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 4, CH155		:

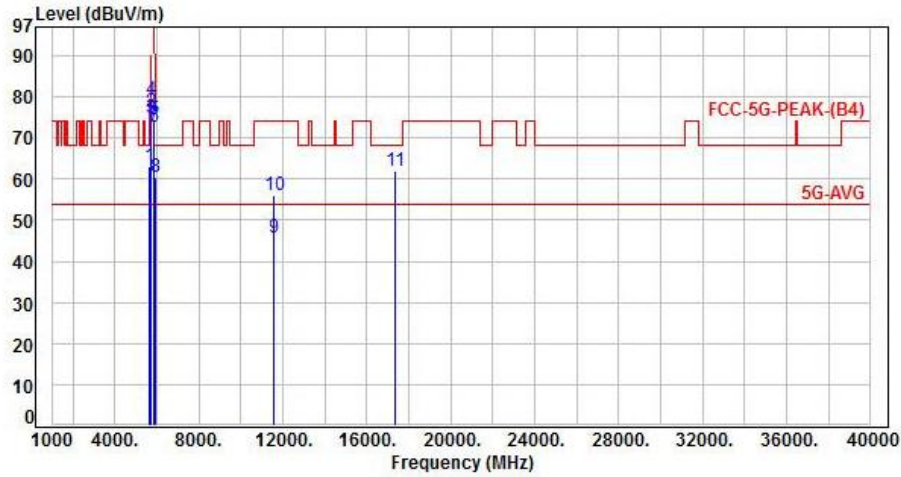


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.26	56.68	62.94	68.20	-5.26	Peak	100	35	P
2	5700.00	6.30	70.12	76.42	105.20	-28.78	Peak	100	35	P
3	5720.00	6.31	68.74	75.05	110.80	-35.75	Peak	100	35	P
4	5725.00	6.32	73.01	79.33	122.20	-42.87	Peak	100	35	P
5	5850.00	6.41	68.19	74.60	122.20	-47.60	Peak	100	35	P
6	5855.00	6.43	66.14	72.57	110.80	-38.23	Peak	100	35	P
7	5875.00	6.53	66.51	73.04	105.20	-32.16	Peak	100	35	P
8	5925.00	6.70	53.88	60.58	68.20	-7.62	Peak	100	35	P
9	11550.00	14.77	30.80	45.57	54.00	-8.43	Average	132	320	P
10	11550.00	14.77	41.39	56.16	74.00	-17.84	Peak	132	320	P
11	17325.00	20.64	41.18	61.82	68.20	-6.38	Peak	100	35	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 2 Straddle Channel, CH50		:

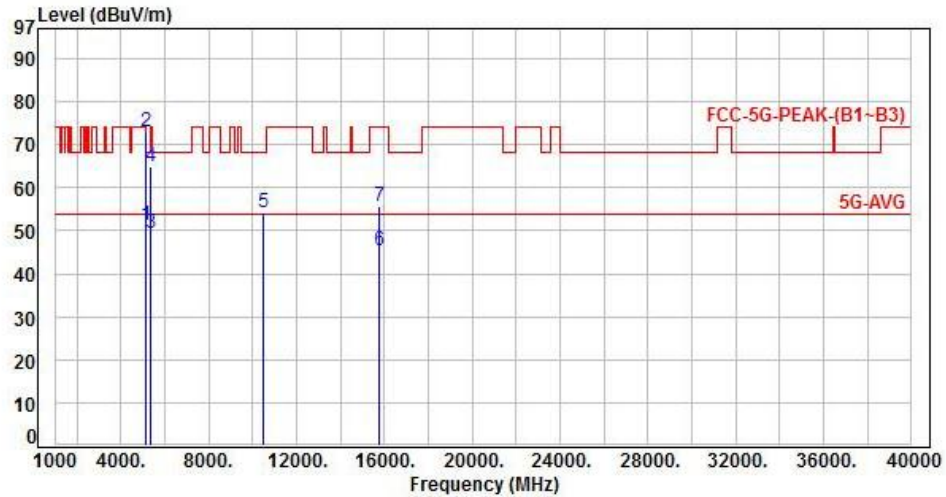


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	45.36	51.08	54.00	-2.92	Average	175	235	P
2	5150.00	5.72	67.25	72.97	74.00	-1.03	Peak	175	235	P
3	5350.00	6.12	43.29	49.41	54.00	-4.59	Average	100	55	P
4	5350.00	6.12	58.85	64.97	74.00	-9.03	Peak	100	55	P
5	10500.00	13.06	41.26	54.32	68.20	-13.88	Peak	100	248	P
6	15750.00	14.55	30.64	45.19	54.00	-8.81	Average	125	280	P
7	15750.00	14.55	41.22	55.77	74.00	-18.23	Peak	125	280	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 2 Straddle Channel, CH50		:

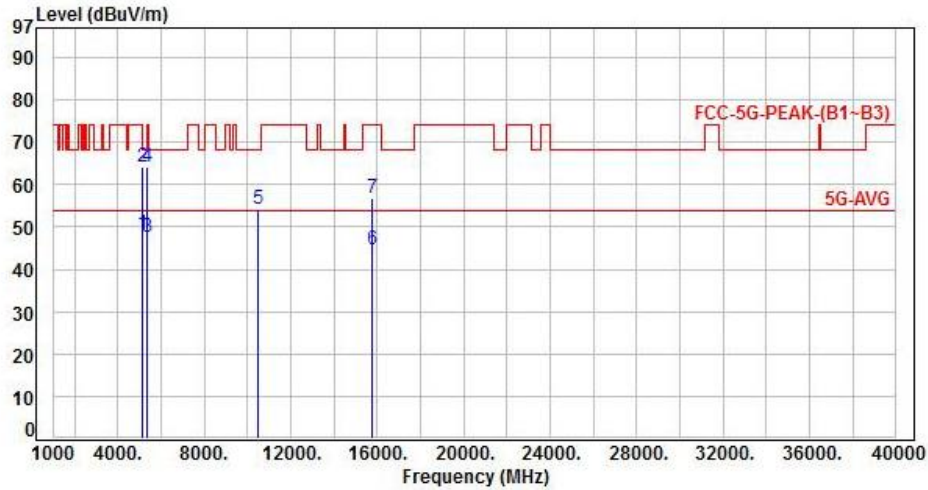


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.72	42.51	48.23	54.00	-5.77	Average	120	157	P
2	5150.00	5.72	58.41	64.13	74.00	-9.87	Peak	120	157	P
3	5350.00	6.12	41.33	47.45	54.00	-6.55	Average	120	157	P
4	5350.00	6.12	57.99	64.11	74.00	-9.89	Peak	120	157	P
5	10500.00	13.06	41.15	54.21	68.20	-13.99	Peak	100	12	P
6	15750.00	14.55	30.11	44.66	54.00	-9.34	Average	135	275	P
7	15750.00	14.55	42.27	56.82	74.00	-17.18	Peak	135	275	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 3 Straddle Channel, CH114		

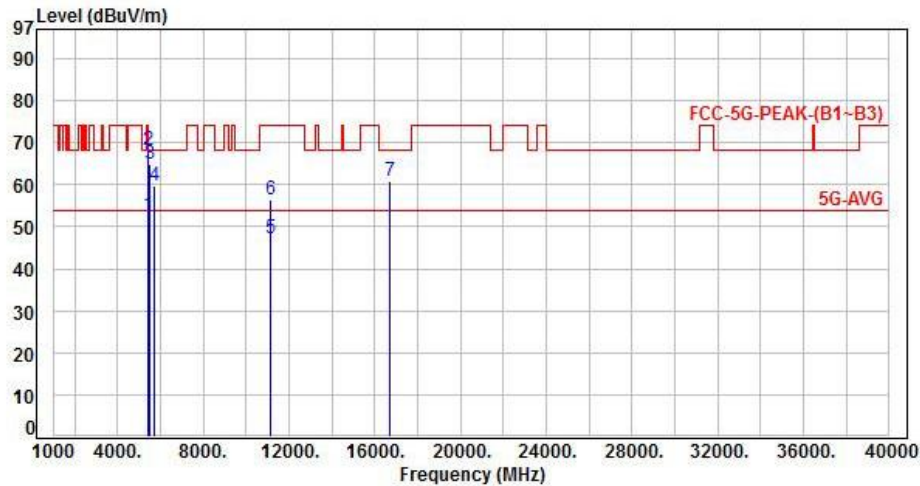


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.70	45.88	52.58	54.00	-1.42	Average	189	290	P
2	5460.00	6.70	61.51	68.21	74.00	-5.79	Peak	189	290	P
3	5470.00	6.70	58.22	64.92	68.20	-3.28	Peak	189	290	P
4	5725.00	6.67	53.22	59.89	68.20	-8.31	Peak	189	290	P
5	11140.00	14.47	32.82	47.29	54.00	-6.71	Average	144	260	P
6	11140.00	14.47	42.10	56.57	74.00	-17.43	Peak	144	260	P
7	16710.00	17.90	43.13	61.03	68.20	-7.17	Peak	100	192	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 3 Straddle Channel, CH114		

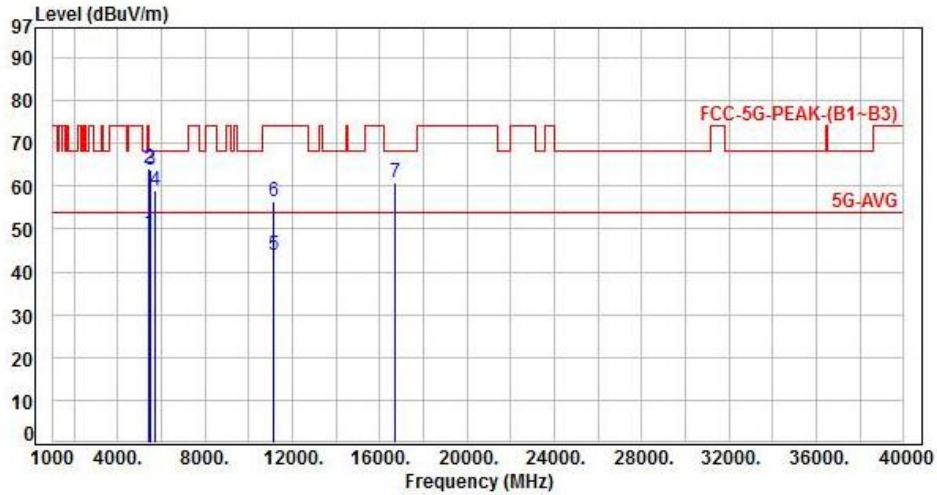


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.70	42.39	49.09	54.00	-4.91	Average	150	31	P
2	5460.00	6.70	57.53	64.23	74.00	-9.77	Peak	150	31	P
3	5470.00	6.70	56.93	63.63	68.20	-4.57	Peak	150	31	P
4	5725.00	6.67	52.42	59.09	68.20	-9.11	Peak	150	31	P
5	11140.00	14.47	29.52	43.99	54.00	-10.01	Average	100	86	P
6	11140.00	14.47	41.83	56.30	74.00	-17.70	Peak	100	86	P
7	16710.00	17.90	42.97	60.87	68.20	-7.33	Peak	100	73	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 3 Straddle Channel, CH144		:

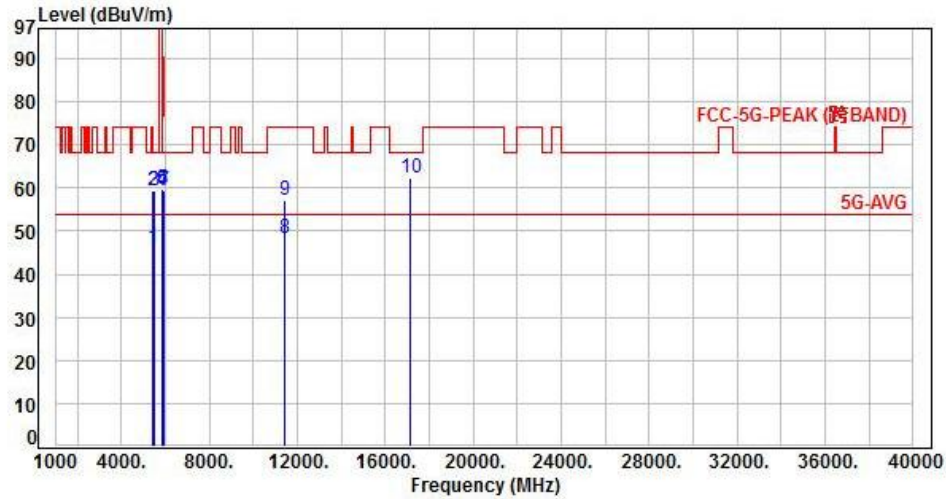


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.82	46.14	54.00	-7.86	Average	129	105	P
2	5460.00	6.32	53.15	59.47	74.00	-14.53	Peak	129	105	P
3	5470.00	6.34	53.20	59.54	68.20	-8.66	Peak	129	105	P
4	5850.00	6.41	52.99	59.40	122.20	-62.80	Peak	129	105	P
5	5855.00	6.43	53.14	59.57	110.80	-51.23	Peak	129	105	P
6	5875.00	6.53	53.18	59.71	105.20	-45.49	Peak	129	105	P
7	5925.00	6.70	52.53	59.23	68.20	-8.97	Peak	129	105	P
8	11440.00	14.42	33.76	48.18	54.00	-5.82	Average	135	258	P
9	11440.00	14.42	42.57	56.99	74.00	-17.01	Peak	135	258	P
10	17160.00	19.78	42.63	62.41	68.20	-5.79	Peak	100	223	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 3 Straddle Channel, CH144		:

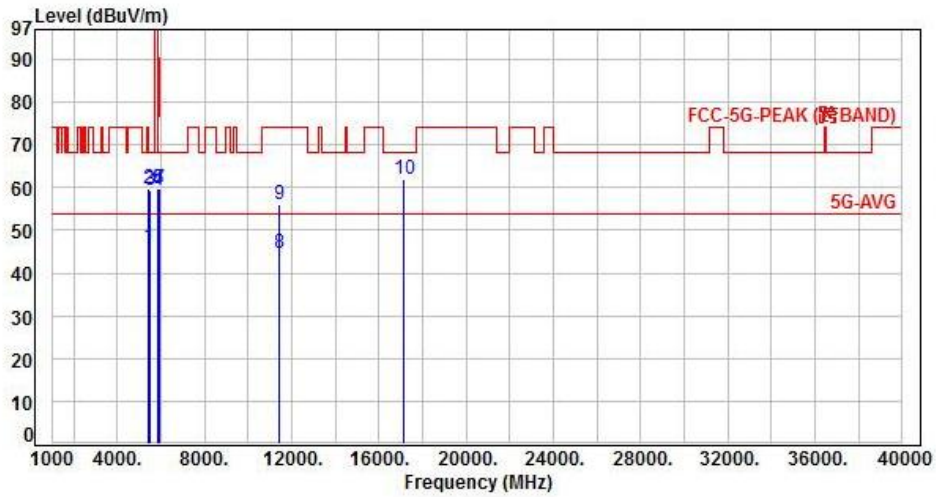


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.94	46.26	54.00	-7.74	Average	100	196	P
2	5460.00	6.32	53.45	59.77	74.00	-14.23	Peak	100	196	P
3	5470.00	6.34	53.17	59.51	68.20	-8.69	Peak	100	196	P
4	5850.00	6.41	53.12	59.53	122.20	-62.67	Peak	100	196	P
5	5855.00	6.43	53.19	59.62	110.80	-51.18	Peak	100	196	P
6	5875.00	6.53	53.33	59.86	105.20	-45.34	Peak	100	196	P
7	5925.00	6.70	52.98	59.68	68.20	-8.52	Peak	100	196	P
8	11440.00	14.42	30.34	44.76	54.00	-9.24	Average	100	148	P
9	11440.00	14.42	41.62	56.04	74.00	-17.96	Peak	100	148	P
10	17160.00	19.78	42.31	62.09	68.20	-6.11	Peak	100	42	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3 Straddle Channel, CH144		

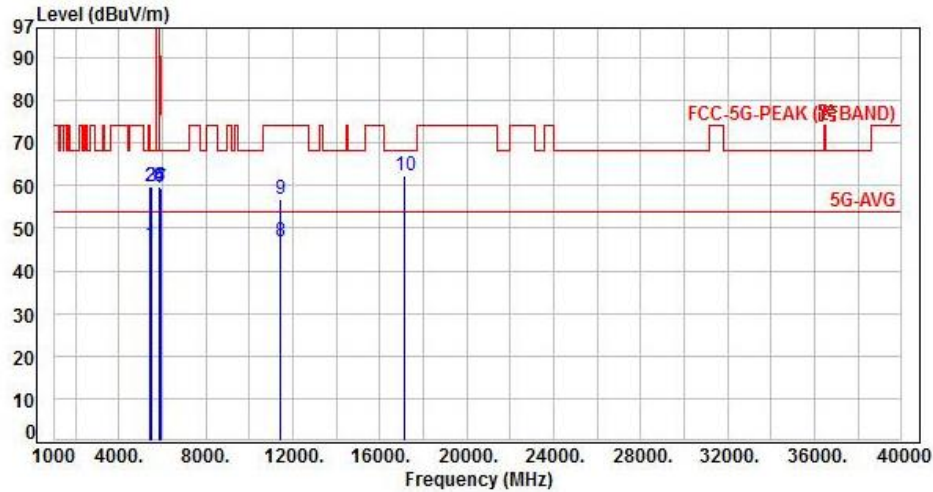


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.77	46.09	54.00	-7.91	Average	118	157	P
2	5460.00	6.32	53.26	59.58	74.00	-14.42	Peak	118	157	P
3	5470.00	6.34	53.37	59.71	68.20	-8.49	Peak	118	157	P
4	5850.00	6.41	53.24	59.65	122.20	-62.55	Peak	118	157	P
5	5855.00	6.43	53.29	59.72	110.80	-51.08	Peak	118	157	P
6	5875.00	6.53	53.33	59.86	105.20	-45.34	Peak	118	157	P
7	5925.00	6.70	52.67	59.37	68.20	-8.83	Peak	118	157	P
8	11440.00	14.42	32.59	47.01	54.00	-6.99	Average	136	257	P
9	11440.00	14.42	42.51	56.93	74.00	-17.07	Peak	136	257	P
10	17160.00	19.78	42.45	62.23	68.20	-5.97	Peak	100	228	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3 Straddle Channel, CH144		:

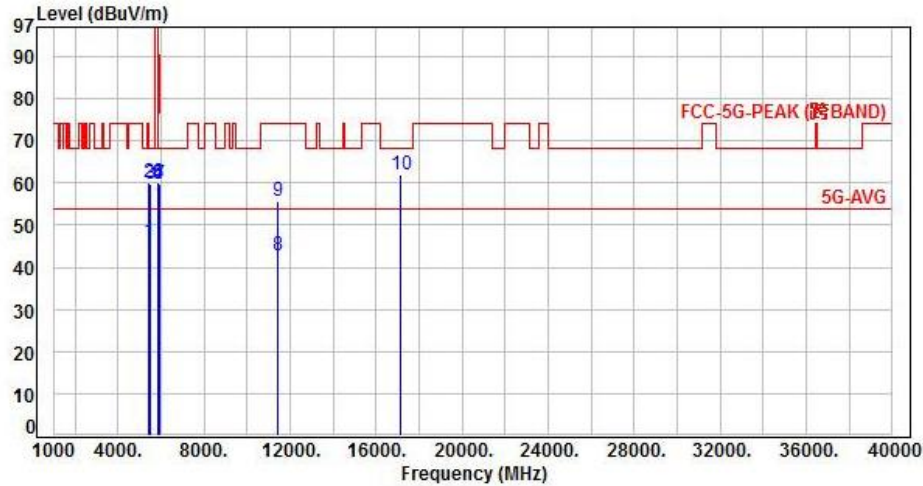


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.89	46.21	54.00	-7.79	Average	100	178	P
2	5460.00	6.32	53.63	59.95	74.00	-14.05	Peak	100	178	P
3	5470.00	6.34	53.33	59.67	68.20	-8.53	Peak	100	178	P
4	5850.00	6.41	53.40	59.81	122.20	-62.39	Peak	100	178	P
5	5855.00	6.43	53.25	59.68	110.80	-51.12	Peak	100	178	P
6	5875.00	6.53	53.50	60.03	105.20	-45.17	Peak	100	178	P
7	5925.00	6.70	53.06	59.76	68.20	-8.44	Peak	100	178	P
8	11440.00	14.42	28.43	42.85	54.00	-11.15	Average	100	151	P
9	11440.00	14.42	41.23	55.65	74.00	-18.35	Peak	100	151	P
10	17160.00	19.78	42.19	61.97	68.20	-6.23	Peak	100	46	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3 Straddle Channel, CH142		

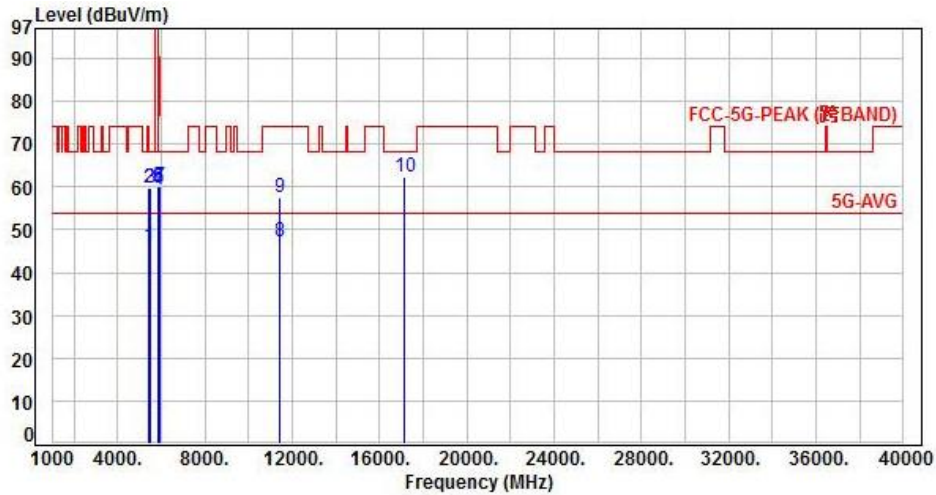


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.88	46.20	54.00	-7.80	Average	124	294	P
2	5460.00	6.32	53.52	59.84	74.00	-14.16	Peak	124	294	P
3	5470.00	6.34	53.43	59.77	68.20	-8.43	Peak	124	294	P
4	5850.00	6.41	52.99	59.40	122.20	-62.80	Peak	124	294	P
5	5855.00	6.43	53.15	59.58	110.80	-51.22	Peak	124	294	P
6	5875.00	6.53	53.45	59.98	105.20	-45.22	Peak	124	294	P
7	5925.00	6.70	53.39	60.09	68.20	-8.11	Peak	124	294	P
8	11420.00	14.35	32.74	47.09	54.00	-6.91	Average	136	259	P
9	11420.00	14.35	43.26	57.61	74.00	-16.39	Peak	136	259	P
10	17130.00	19.59	42.71	62.30	68.20	-5.90	Peak	100	221	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 3 Straddle Channel, CH142		:

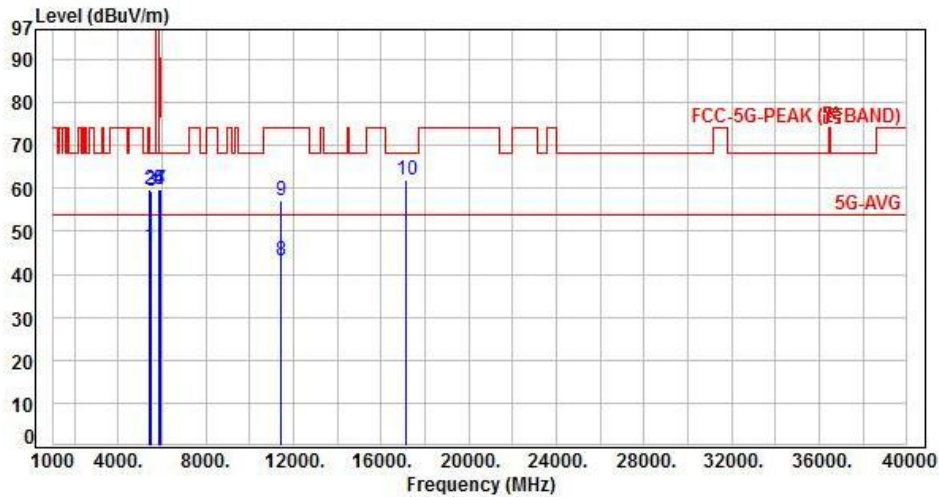


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.05	46.37	54.00	-7.63	Average	106	227	P
2	5460.00	6.32	53.45	59.77	74.00	-14.23	Peak	106	227	P
3	5470.00	6.34	53.16	59.50	68.20	-8.70	Peak	106	227	P
4	5850.00	6.41	53.31	59.72	122.20	-62.48	Peak	106	227	P
5	5855.00	6.43	53.18	59.61	110.80	-51.19	Peak	106	227	P
6	5875.00	6.53	53.32	59.85	105.20	-45.35	Peak	106	227	P
7	5925.00	6.70	52.90	59.60	68.20	-8.60	Peak	106	227	P
8	11420.00	14.35	28.76	43.11	54.00	-10.89	Average	100	132	P
9	11420.00	14.35	42.95	57.30	74.00	-16.70	Peak	100	132	P
10	17130.00	19.59	42.46	62.05	68.20	-6.15	Peak	100	57	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 3 Straddle Channel, CH138		:

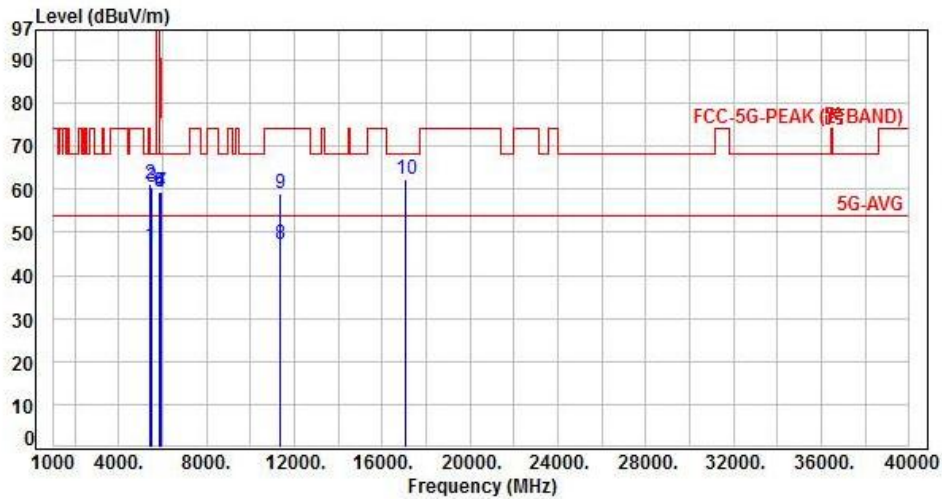


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.48	46.80	54.00	-7.20	Average	100	290	P
2	5460.00	6.32	54.73	61.05	74.00	-12.95	Peak	100	290	P
3	5470.00	6.34	54.02	60.36	68.20	-7.84	Peak	100	290	P
4	5850.00	6.41	52.94	59.35	122.20	-62.85	Peak	100	290	P
5	5855.00	6.43	52.99	59.42	110.80	-51.38	Peak	100	290	P
6	5875.00	6.53	52.99	59.52	105.20	-45.68	Peak	100	290	P
7	5925.00	6.70	52.75	59.45	68.20	-8.75	Peak	100	290	P
8	11380.00	14.26	33.08	47.34	54.00	-6.66	Average	142	254	P
9	11380.00	14.26	44.75	59.01	74.00	-14.99	Peak	142	254	P
10	17070.00	19.30	43.02	62.32	68.20	-5.88	Peak	100	213	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 3 Straddle Channel, CH138		:

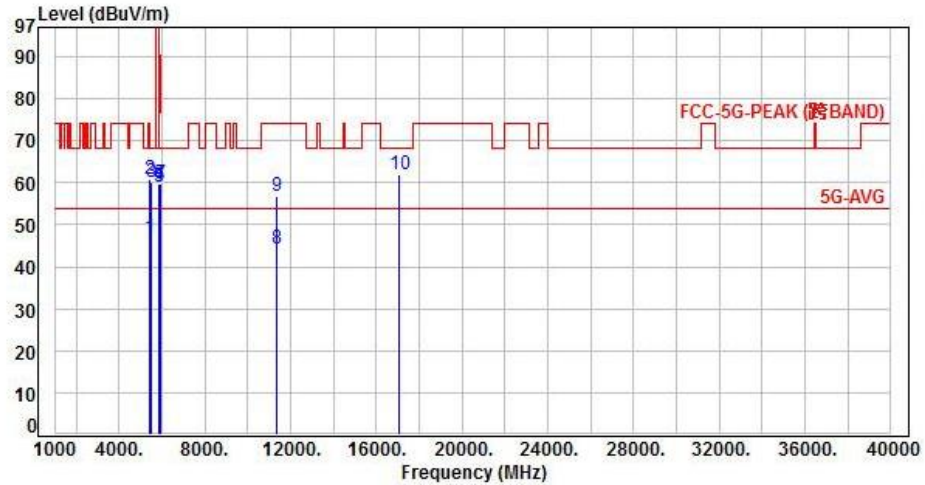


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.56	46.88	54.00	-7.12	Average	100	213	P
2	5460.00	6.32	54.67	60.99	74.00	-13.01	Peak	100	213	P
3	5470.00	6.34	53.68	60.02	68.20	-8.18	Peak	100	213	P
4	5850.00	6.41	52.83	59.24	122.20	-62.96	Peak	100	213	P
5	5855.00	6.43	52.75	59.18	110.80	-51.62	Peak	100	213	P
6	5875.00	6.53	53.13	59.66	105.20	-45.54	Peak	100	213	P
7	5925.00	6.70	53.08	59.78	68.20	-8.42	Peak	100	213	P
8	11380.00	14.26	30.16	44.42	54.00	-9.58	Average	100	94	P
9	11380.00	14.26	42.68	56.94	74.00	-17.06	Peak	100	94	P
10	17070.00	19.30	42.61	61.91	68.20	-6.29	Peak	100	68	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 3 Straddle Channel, CH144		:

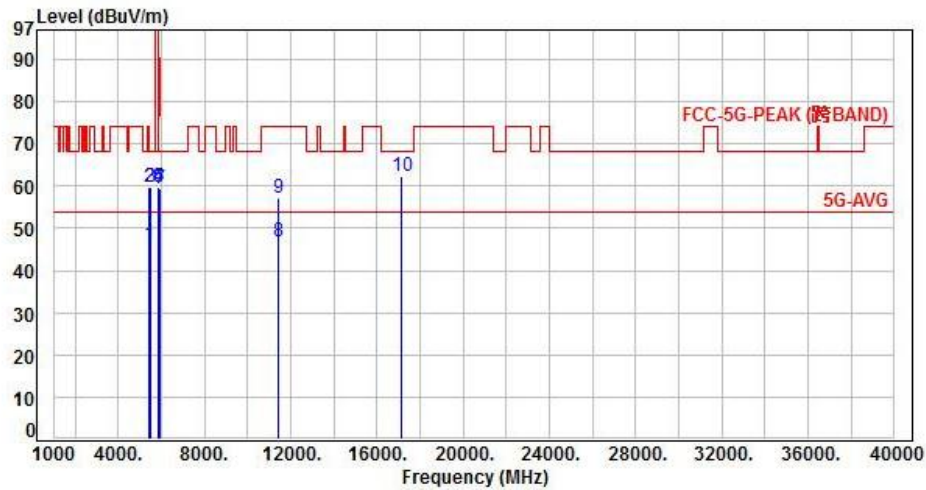


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.78	46.10	54.00	-7.90	Average	112	149	P
2	5460.00	6.32	53.38	59.70	74.00	-14.30	Peak	112	149	P
3	5470.00	6.34	53.49	59.83	68.20	-8.37	Peak	112	149	P
4	5850.00	6.41	53.17	59.58	122.20	-62.62	Peak	112	149	P
5	5855.00	6.43	53.34	59.77	110.80	-51.03	Peak	112	149	P
6	5875.00	6.53	53.20	59.73	105.20	-45.47	Peak	112	149	P
7	5925.00	6.70	52.67	59.37	68.20	-8.83	Peak	118	157	P
8	11440.00	14.42	32.36	46.78	54.00	-7.22	Average	113	256	P
9	11440.00	14.42	42.75	57.17	74.00	-16.83	Peak	113	256	P
10	17160.00	19.78	42.56	62.34	68.20	-5.86	Peak	100	213	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 3 Straddle Channel, CH144		:

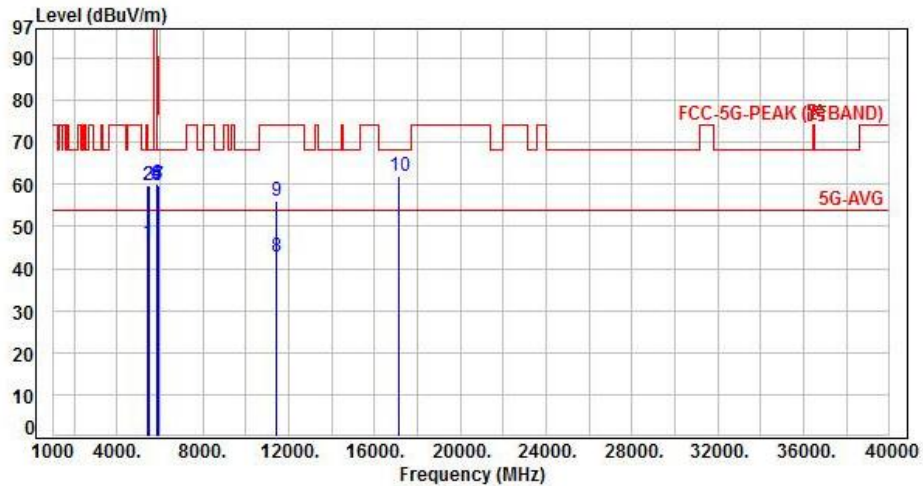


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.92	46.24	54.00	-7.76	Average	100	162	P
2	5460.00	6.32	53.51	59.83	74.00	-14.17	Peak	100	162	P
3	5470.00	6.34	53.47	59.81	68.20	-8.39	Peak	100	162	P
4	5850.00	6.41	53.78	60.19	122.20	-62.01	Peak	100	162	P
5	5855.00	6.43	53.44	59.87	110.80	-50.93	Peak	100	162	P
6	5875.00	6.53	53.74	60.27	105.20	-44.93	Peak	100	162	P
7	5925.00	6.70	53.12	59.82	68.20	-8.38	Peak	100	162	P
8	11440.00	14.42	28.26	42.68	54.00	-11.32	Average	100	145	P
9	11440.00	14.42	41.56	55.98	74.00	-18.02	Peak	100	145	P
10	17160.00	19.78	42.24	62.02	68.20	-6.18	Peak	100	57	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, Band 3 Straddle Channel, CH142		

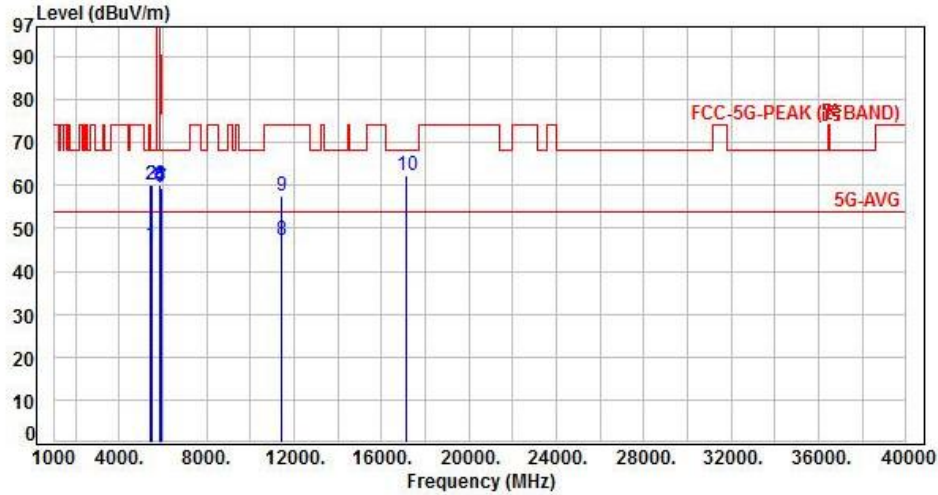


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	39.84	46.16	54.00	-7.84	Average	133	302	P
2	5460.00	6.32	53.78	60.10	74.00	-13.90	Peak	133	302	P
3	5470.00	6.34	53.60	59.94	68.20	-8.26	Peak	133	302	P
4	5850.00	6.41	53.44	59.85	122.20	-62.35	Peak	133	302	P
5	5855.00	6.43	53.47	59.90	110.80	-50.90	Peak	133	302	P
6	5875.00	6.53	53.61	60.14	105.20	-45.06	Peak	133	302	P
7	5925.00	6.70	52.79	59.49	68.20	-8.71	Peak	133	302	P
8	11420.00	14.35	32.92	47.27	54.00	-6.73	Average	135	258	P
9	11420.00	14.35	43.34	57.69	74.00	-16.31	Peak	135	258	P
10	17130.00	19.59	42.88	62.47	68.20	-5.73	Peak	100	217	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, Band 3 Straddle Channel, CH142		:

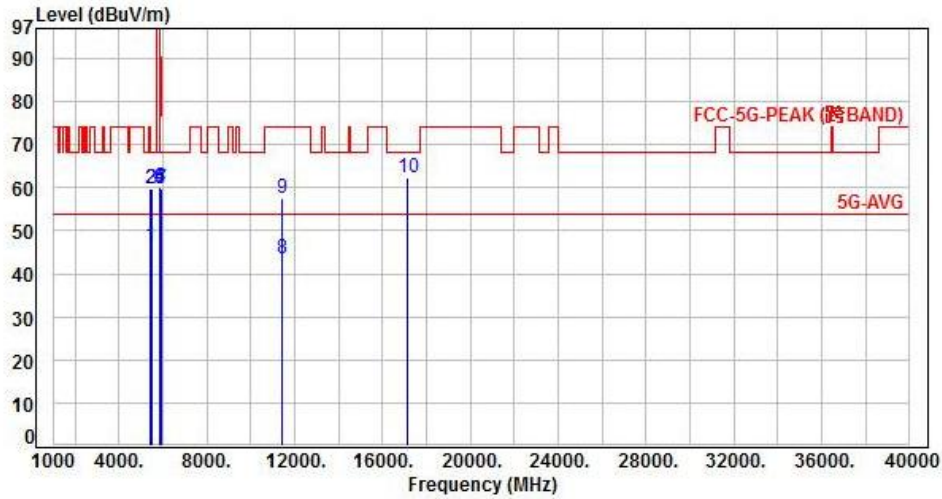


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.02	46.34	54.00	-7.66	Average	102	214	P
2	5460.00	6.32	53.61	59.93	74.00	-14.07	Peak	102	214	P
3	5470.00	6.34	53.36	59.70	68.20	-8.50	Peak	102	214	P
4	5850.00	6.41	53.55	59.96	122.20	-62.24	Peak	102	214	P
5	5855.00	6.43	53.26	59.69	110.80	-51.11	Peak	102	214	P
6	5875.00	6.53	53.57	60.10	105.20	-45.10	Peak	102	214	P
7	5925.00	6.70	52.98	59.68	68.20	-8.52	Peak	102	214	P
8	11420.00	14.35	29.11	43.46	54.00	-10.54	Average	100	128	P
9	11420.00	14.35	43.15	57.50	74.00	-16.50	Peak	100	128	P
10	17130.00	19.59	42.59	62.18	68.20	-6.02	Peak	100	62	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 3 Straddle Channel, CH138		:

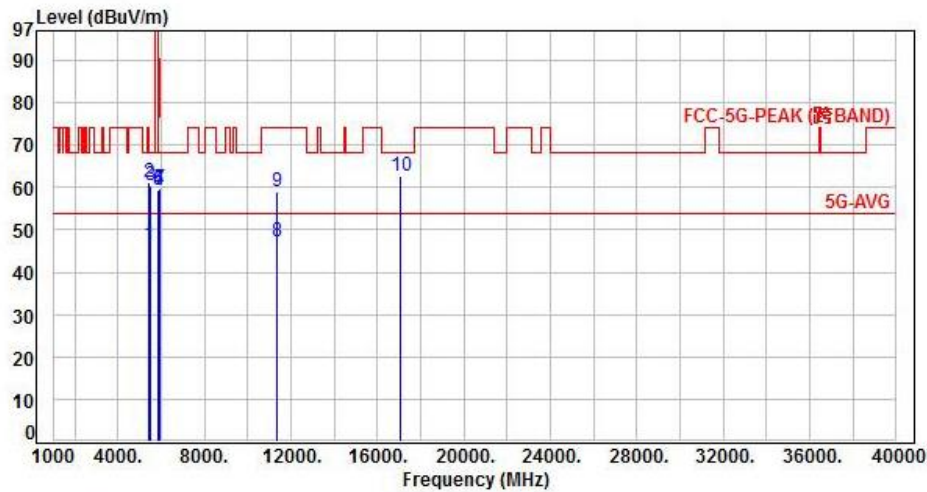


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.31	46.63	54.00	-7.37	Average	100	288	P
2	5460.00	6.32	54.85	61.17	74.00	-12.83	Peak	100	288	P
3	5470.00	6.34	54.16	60.50	68.20	-7.70	Peak	100	288	P
4	5850.00	6.41	53.03	59.44	122.20	-62.76	Peak	100	288	P
5	5855.00	6.43	52.84	59.27	110.80	-51.53	Peak	100	288	P
6	5875.00	6.53	52.72	59.25	105.20	-45.95	Peak	100	288	P
7	5925.00	6.70	52.96	59.66	68.20	-8.54	Peak	100	288	P
8	11380.00	14.26	32.96	47.22	54.00	-6.78	Average	138	252	P
9	11380.00	14.26	44.61	58.87	74.00	-15.13	Peak	138	252	P
10	17070.00	19.30	43.24	62.54	68.20	-5.66	Peak	100	218	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 3 Straddle Channel, CH138		:

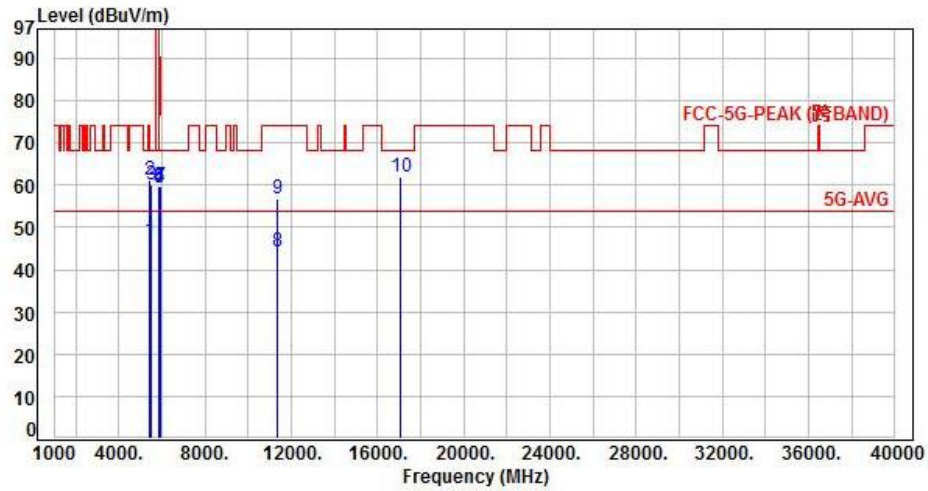


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.32	40.45	46.77	54.00	-7.23	Average	100	206	P
2	5460.00	6.32	54.84	61.16	74.00	-12.84	Peak	100	206	P
3	5470.00	6.34	53.77	60.11	68.20	-8.09	Peak	100	206	P
4	5850.00	6.41	52.94	59.35	122.20	-62.85	Peak	100	206	P
5	5855.00	6.43	52.84	59.27	110.80	-51.53	Peak	100	206	P
6	5875.00	6.53	53.26	59.79	105.20	-45.41	Peak	100	206	P
7	5925.00	6.70	53.17	59.87	68.20	-8.33	Peak	100	206	P
8	11380.00	14.26	30.02	44.28	54.00	-9.72	Average	100	98	P
9	11380.00	14.26	42.55	56.81	74.00	-17.19	Peak	100	98	P
10	17070.00	19.30	42.77	62.07	68.20	-6.13	Peak	100	64	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 1, CH36		:

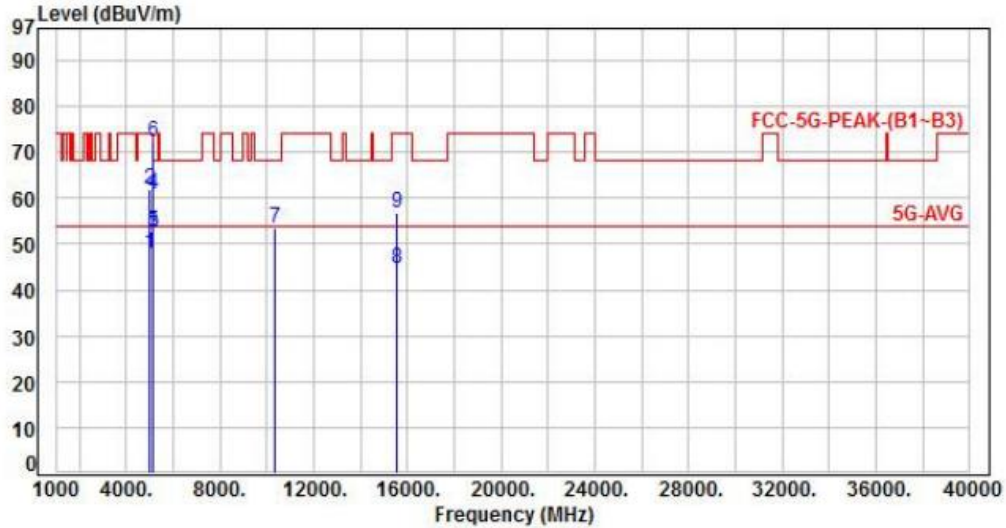


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5024.00	4.46	43.62	48.08	54.00	-5.92	Average	225	306	P
2	5024.00	4.46	57.62	62.08	74.00	-11.92	Peak	225	306	P
3	5119.00	4.61	47.87	52.48	54.00	-1.52	Average	231	74	P
4	5119.00	4.61	56.32	60.93	74.00	-13.07	Peak	231	74	P
5	5150.00	4.69	47.94	52.63	54.00	-1.37	Average	245	13	P
6	5150.00	4.69	67.44	72.13	74.00	-1.87	Peak	245	13	P
7	10360.00	11.51	42.15	53.66	68.20	-14.54	Peak	292	78	P
8	15540.00	13.85	30.64	44.49	54.00	-9.51	Average	100	299	P
9	15540.00	13.85	42.83	56.68	74.00	-17.32	Peak	100	299	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 1, CH36		:

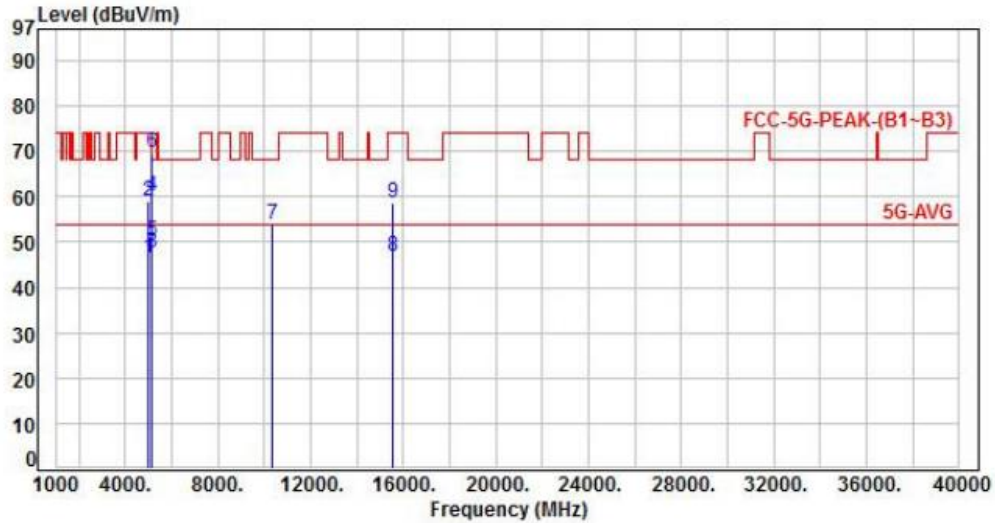


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5024.00	4.46	42.11	46.57	54.00	-7.43	Average	100	34	P
2	5024.00	4.46	54.51	58.97	74.00	-15.03	Peak	100	34	P
3	5119.00	4.61	42.98	47.59	54.00	-6.41	Average	218	127	P
4	5119.00	4.61	55.39	60.00	74.00	-14.00	Peak	218	127	P
5	5150.00	4.69	45.54	50.23	54.00	-3.77	Average	198	76	P
6	5150.00	4.69	65.10	69.79	74.00	-4.21	Peak	198	76	P
7	10360.00	11.51	42.32	53.83	68.20	-14.37	Peak	198	48	P
8	15540.00	13.85	33.09	46.94	54.00	-7.06	Average	152	61	P
9	15540.00	13.85	44.72	58.57	74.00	-15.43	Peak	152	61	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 1, CH40		

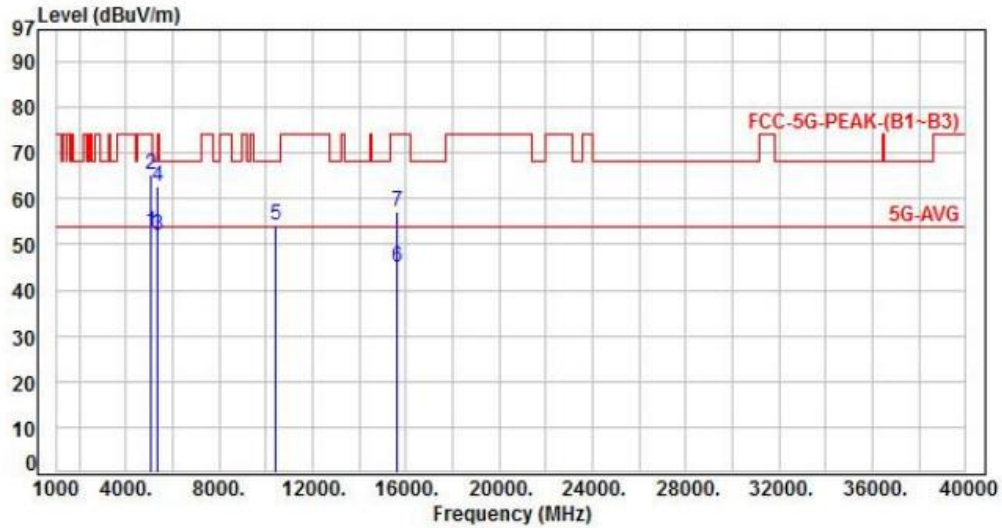


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5038.00	4.50	48.27	52.77	54.00	-1.23	Average	236	74	P
2	5038.00	4.50	60.82	65.32	74.00	-8.68	Peak	236	74	P
3	5363.00	5.04	46.78	51.82	54.00	-2.18	Average	237	299	P
4	5363.00	5.04	57.76	62.80	74.00	-11.20	Peak	237	299	P
5	10400.00	11.57	42.54	54.11	68.20	-14.09	Peak	311	96	P
6	15600.00	13.45	31.51	44.96	54.00	-9.04	Average	100	282	P
7	15600.00	13.45	43.62	57.07	74.00	-16.93	Peak	100	282	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 1, CH40		

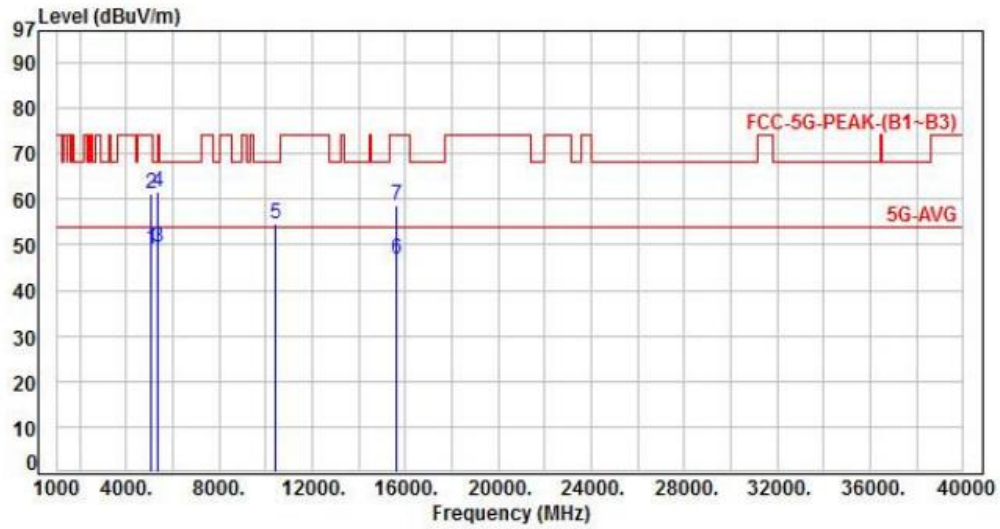


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5038.00	4.50	44.62	49.12	54.00	-4.88	Average	222	130	P
2	5038.00	4.50	56.64	61.14	74.00	-12.86	Peak	222	130	P
3	5363.00	5.04	44.35	49.39	54.00	-4.61	Average	183	45	P
4	5363.00	5.04	56.48	61.52	74.00	-12.48	Peak	183	45	P
5	10400.00	11.57	42.88	54.45	68.20	-13.75	Peak	190	53	P
6	15600.00	13.45	33.42	46.87	54.00	-7.13	Average	119	65	P
7	15600.00	13.45	45.27	58.72	74.00	-15.28	Peak	119	65	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 1, CH48		:

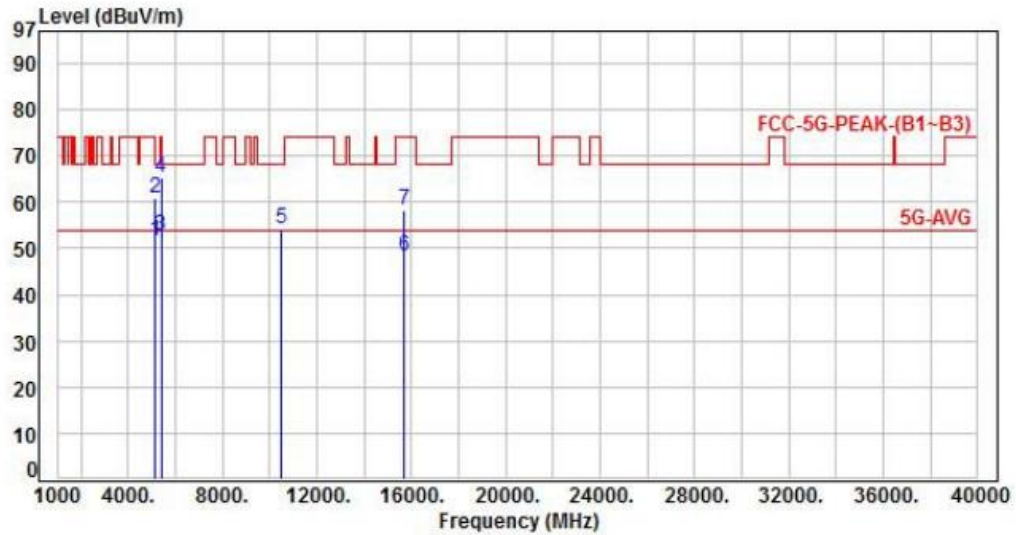


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5119.00	4.61	46.99	51.60	54.00	-2.40	Average	227	74	P
2	5119.00	4.61	56.11	60.72	74.00	-13.28	Peak	227	74	P
3	5392.00	5.05	47.76	52.81	54.00	-1.19	Average	155	300	P
4	5392.00	5.05	60.17	65.22	74.00	-8.78	Peak	155	300	P
5	10480.00	11.70	42.69	54.39	68.20	-13.81	Peak	142	42	P
6	15720.00	13.12	35.20	48.32	54.00	-5.68	Average	171	68	P
7	15720.00	13.12	44.97	58.09	74.00	-15.91	Peak	171	68	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 1, CH48		

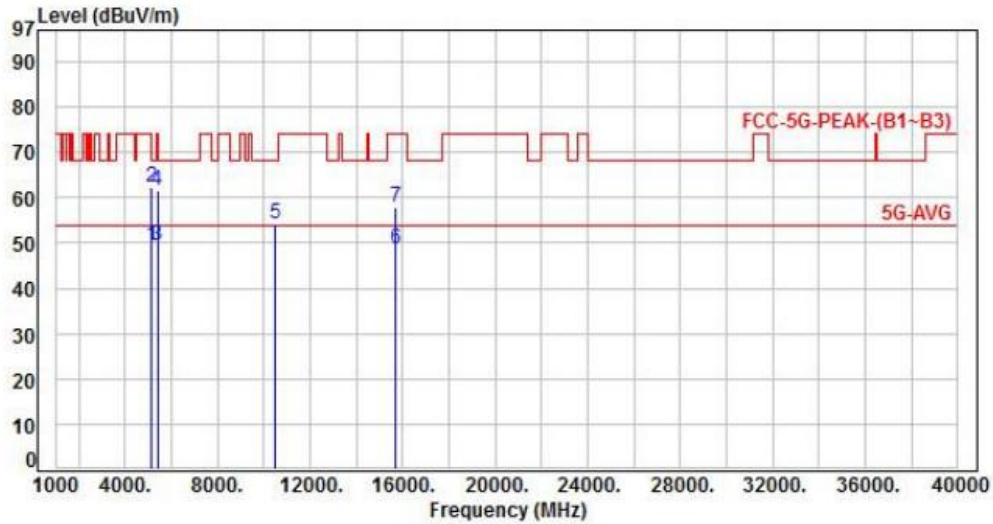


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5119.00	4.61	44.96	49.57	54.00	-4.43	Average	119	43	P
2	5119.00	4.61	57.73	62.34	74.00	-11.66	Peak	119	43	P
3	5392.00	5.05	44.43	49.48	54.00	-4.52	Average	180	41	P
4	5392.00	5.05	56.49	61.54	74.00	-12.46	Peak	180	41	P
5	10480.00	11.70	42.43	54.13	68.20	-14.07	Peak	185	51	P
6	15720.00	13.12	35.72	48.84	54.00	-5.16	Average	166	69	P
7	15720.00	13.12	44.93	58.05	74.00	-15.95	Peak	166	69	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 1, CH38		:

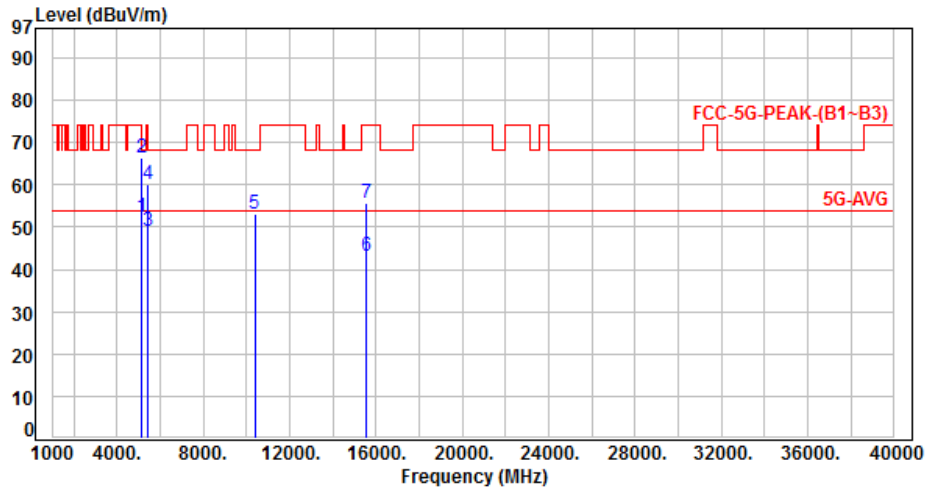


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	47.87	52.56	54.00	-1.44	Average	201	295	P
2	5150.00	4.69	61.84	66.53	74.00	-7.47	Peak	201	295	P
3	5440.00	5.16	43.79	48.95	54.00	-5.05	Average	191	306	P
4	5440.00	5.16	54.98	60.14	74.00	-13.86	Peak	191	306	P
5	10380.00	11.54	41.64	53.18	68.20	-15.02	Peak	172	286	P
6	15570.00	13.65	29.46	43.11	54.00	-10.89	Average	302	289	P
7	15570.00	13.65	42.13	55.78	74.00	-18.22	Peak	302	289	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 1, CH38		:

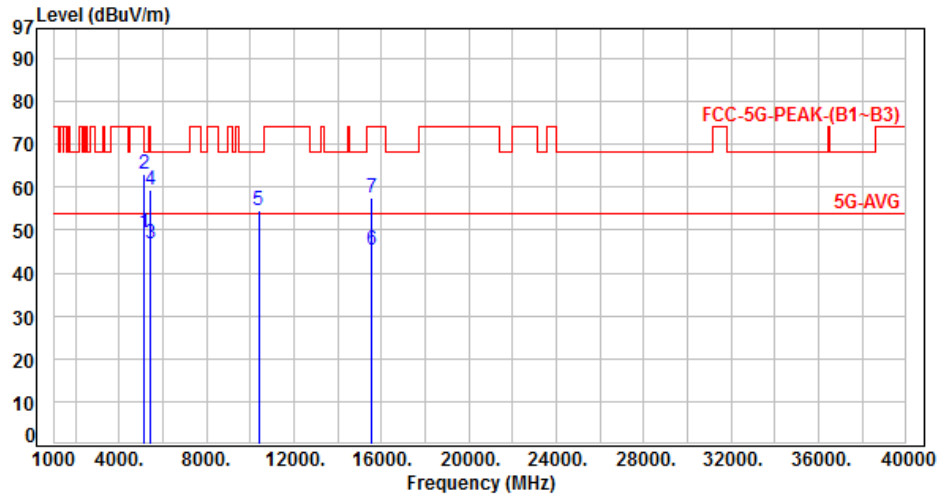


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	44.78	49.47	54.00	-4.53	Average	190	48	P
2	5150.00	4.69	58.45	63.14	74.00	-10.86	Peak	190	48	P
3	5440.00	5.16	41.69	46.85	54.00	-7.15	Average	100	65	P
4	5440.00	5.16	54.31	59.47	74.00	-14.53	Peak	100	65	P
5	10380.00	11.54	42.87	54.41	68.20	-13.79	Peak	118	316	P
6	15570.00	13.65	31.58	45.23	54.00	-8.77	Average	112	62	P
7	15570.00	13.65	43.74	57.39	74.00	-16.61	Peak	112	62	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 1, CH46		:

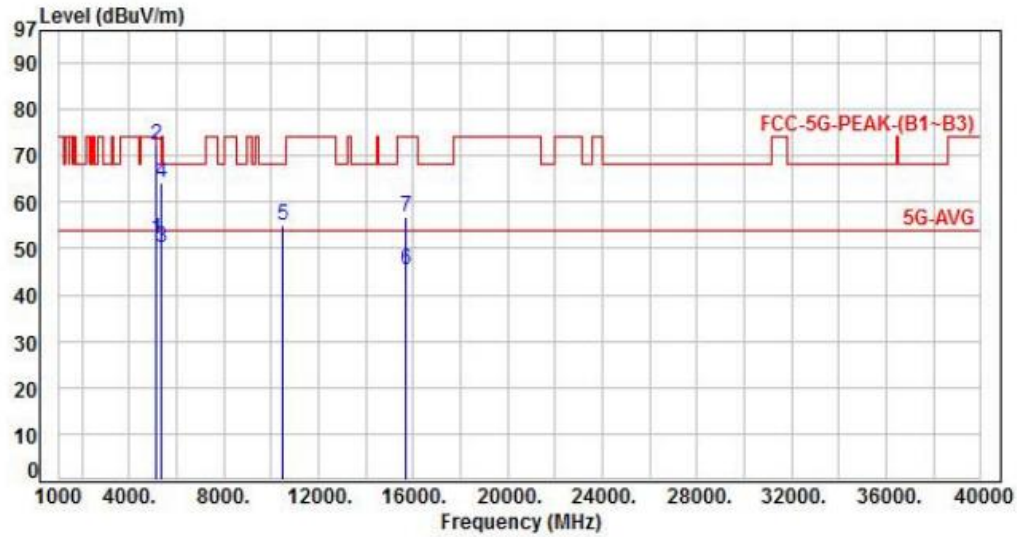


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	47.29	51.98	54.00	-2.02	Average	205	6	P
2	5150.00	4.69	67.74	72.43	74.00	-1.57	Peak	205	6	P
3	5374.00	5.04	44.96	50.00	54.00	-4.00	Average	214	298	P
4	5374.00	5.04	59.20	64.24	74.00	-9.76	Peak	214	298	P
5	10460.00	11.67	43.31	54.98	68.20	-13.22	Peak	231	101	P
6	15690.00	13.13	32.37	45.50	54.00	-8.50	Average	100	65	P
7	15690.00	13.13	43.60	56.73	74.00	-17.27	Peak	100	65	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 1, CH46		:

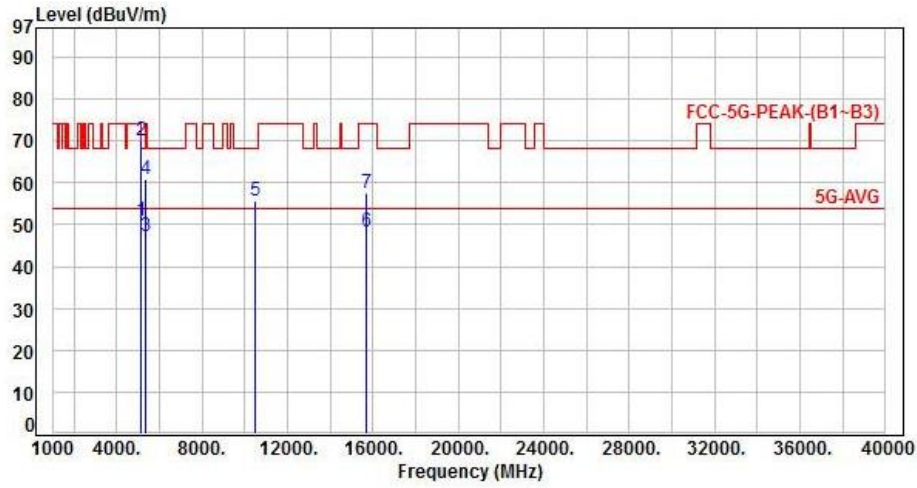


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	46.23	50.92	54.00	-3.08	Average	136	67	P
2	5150.00	4.69	65.39	70.08	74.00	-3.92	Peak	136	67	P
3	5374.00	5.04	42.24	47.28	54.00	-6.72	Average	130	51	P
4	5374.00	5.04	55.98	61.02	74.00	-12.98	Peak	130	51	P
5	10460.00	11.67	43.93	55.60	68.20	-12.60	Peak	190	55	P
6	15690.00	13.13	35.07	48.20	54.00	-5.80	Average	100	69	P
7	15690.00	13.13	44.57	57.70	74.00	-16.30	Peak	100	69	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 15, Band 1, CH42		:

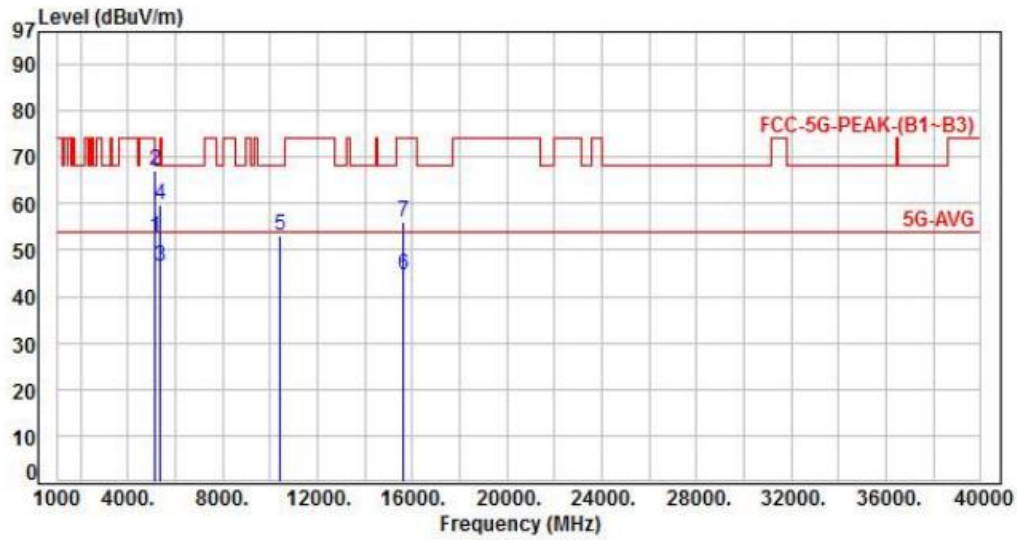


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	48.13	52.82	54.00	-1.18	Average	213	304	P
2	5150.00	4.69	62.27	66.96	74.00	-7.04	Peak	213	304	P
3	5350.00	5.02	41.32	46.34	54.00	-7.66	Average	180	131	P
4	5350.00	5.02	54.63	59.65	74.00	-14.35	Peak	180	131	P
5	10420.00	11.61	41.66	53.27	68.20	-14.93	Peak	100	59	P
6	15630.00	13.34	31.34	44.68	54.00	-9.32	Average	100	85	P
7	15630.00	13.34	42.69	56.03	74.00	-17.97	Peak	100	85	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 15, Band 1, CH42		

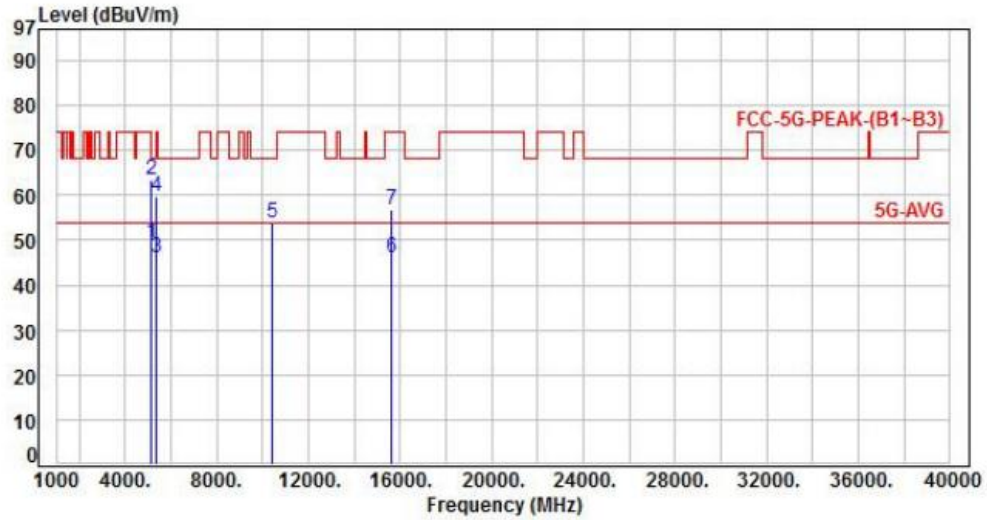


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	44.67	49.36	54.00	-4.64	Average	154	79	P
2	5150.00	4.69	58.59	63.28	74.00	-10.72	Peak	154	79	P
3	5350.00	5.02	41.18	46.20	54.00	-7.80	Average	154	79	P
4	5350.00	5.02	54.72	59.74	74.00	-14.26	Peak	154	79	P
5	10420.00	11.61	42.40	54.01	68.20	-14.19	Peak	100	52	P
6	15630.00	13.34	32.89	46.23	54.00	-7.77	Average	100	17	P
7	15630.00	13.34	43.62	56.96	74.00	-17.04	Peak	100	17	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 1, CH36		

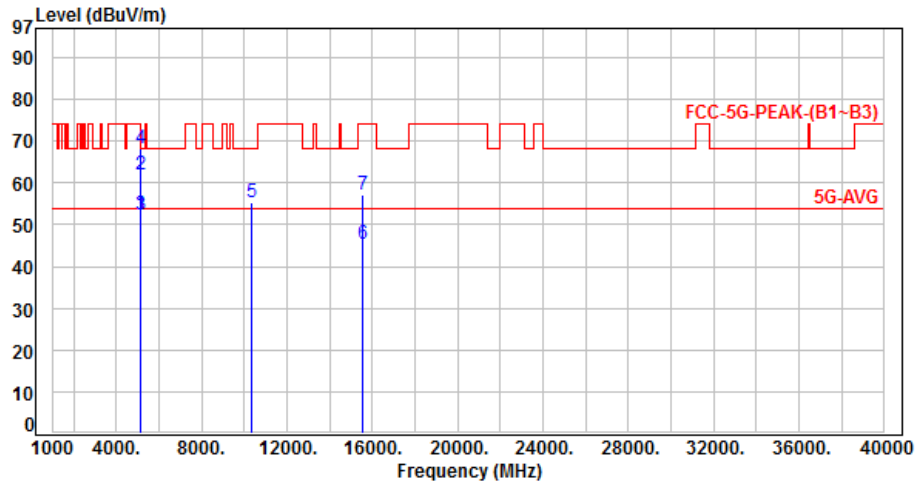


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	47.89	52.50	54.00	-1.50	Average	219	78	P
2	5120.00	4.61	57.22	61.83	74.00	-12.17	Peak	219	78	P
3	5150.00	4.69	47.83	52.52	54.00	-1.48	Average	170	331	P
4	5150.00	4.69	63.64	68.33	74.00	-5.67	Peak	170	331	P
5	10360.00	11.51	43.88	55.39	68.20	-12.81	Peak	393	280	P
6	15540.00	13.85	31.67	45.52	54.00	-8.48	Average	359	88	P
7	15540.00	13.85	43.23	57.08	74.00	-16.92	Peak	359	88	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 1, CH36		:

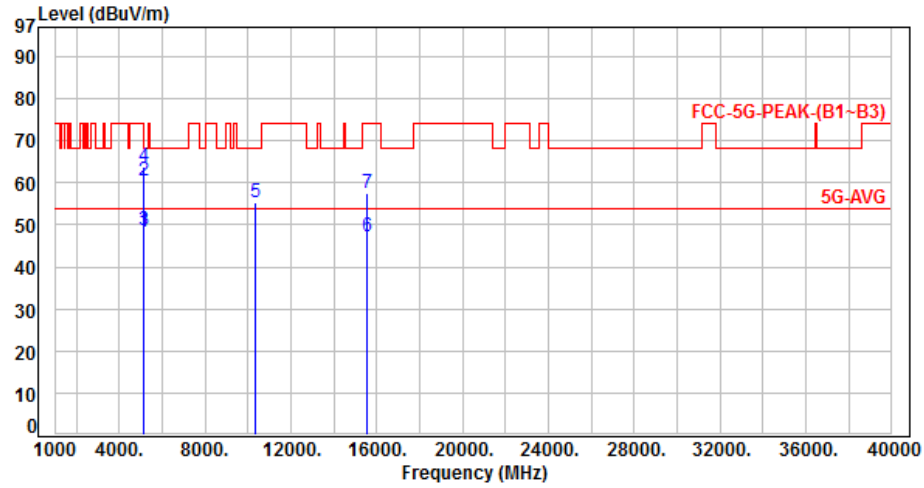


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.61	48.22	54.00	-5.78	Average	240	133	P
2	5120.00	4.61	55.73	60.34	74.00	-13.66	Peak	240	133	P
3	5150.00	4.69	43.97	48.66	54.00	-5.34	Average	148	62	P
4	5150.00	4.69	59.03	63.72	74.00	-10.28	Peak	148	62	P
5	10360.00	11.51	43.92	55.43	68.20	-12.77	Peak	214	53	P
6	15540.00	13.85	33.21	47.06	54.00	-6.94	Average	181	68	P
7	15540.00	13.85	43.63	57.48	74.00	-16.52	Peak	181	68	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 1, CH40		:

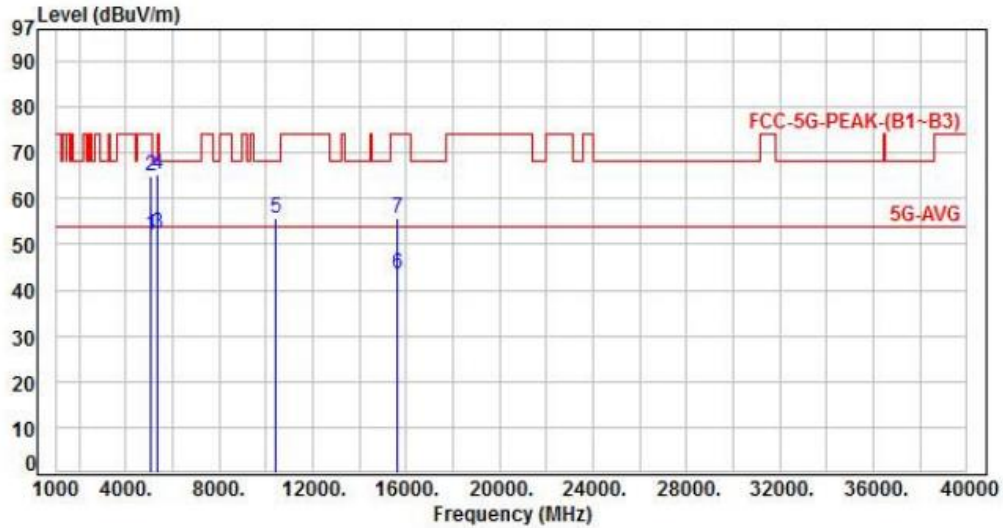


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5044.00	4.51	47.43	51.94	54.00	-2.06	Average	184	333	P
2	5044.00	4.51	60.44	64.95	74.00	-9.05	Peak	184	333	P
3	5350.00	5.02	47.53	52.55	54.00	-1.45	Average	207	22	P
4	5350.00	5.02	60.33	65.35	74.00	-8.65	Peak	207	22	P
5	10400.00	11.57	44.03	55.60	68.20	-12.60	Peak	395	89	P
6	15600.00	13.45	29.90	43.35	54.00	-10.65	Average	100	291	P
7	15600.00	13.45	42.32	55.77	74.00	-18.23	Peak	100	291	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 1, CH40		:

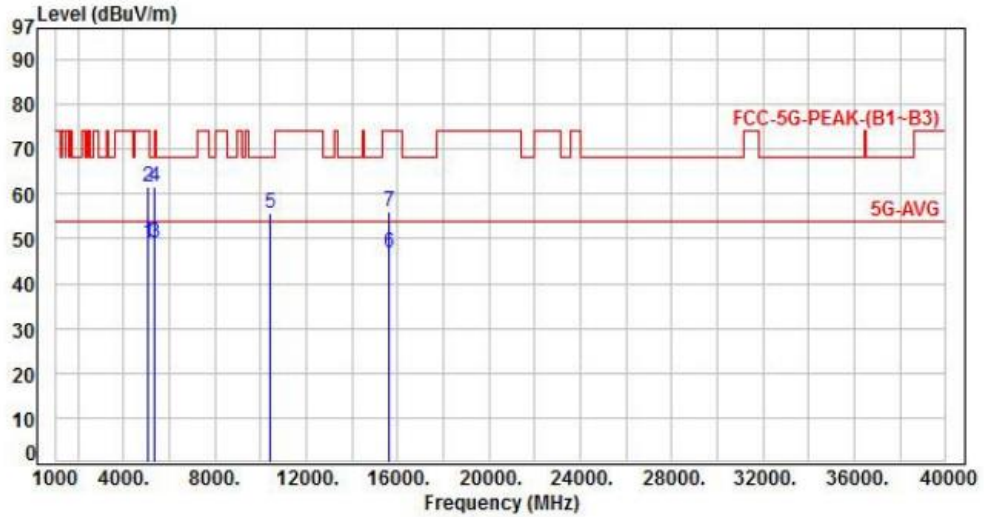


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5044.00	4.51	44.58	49.09	54.00	-4.91	Average	200	50	P
2	5044.00	4.51	57.10	61.61	74.00	-12.39	Peak	200	50	P
3	5350.00	5.02	44.02	49.04	54.00	-4.96	Average	189	42	P
4	5350.00	5.02	56.60	61.62	74.00	-12.38	Peak	189	42	P
5	10400.00	11.57	43.95	55.52	68.20	-12.68	Peak	181	48	P
6	15600.00	13.45	33.21	46.66	54.00	-7.34	Average	171	67	P
7	15600.00	13.45	42.51	55.96	74.00	-18.04	Peak	171	67	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 1, CH48		:

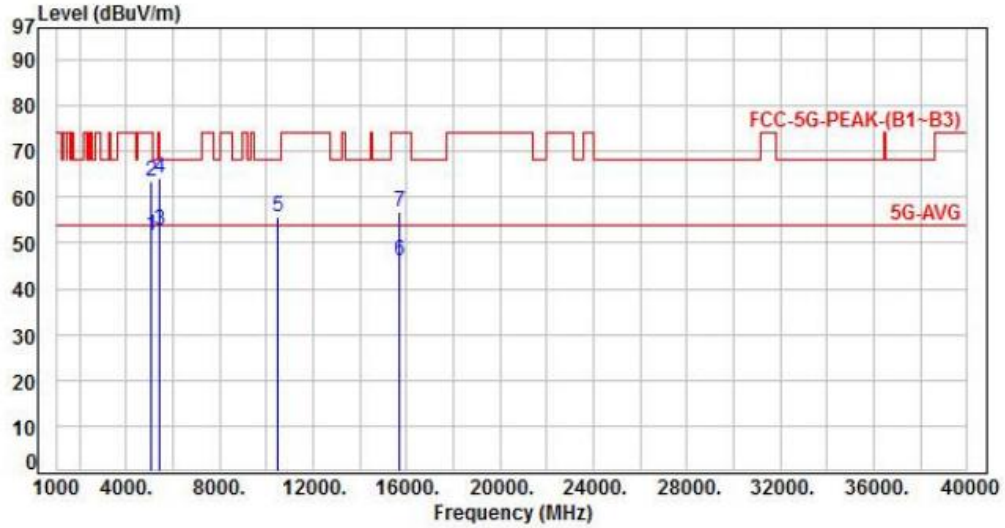


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5085.00	4.56	47.20	51.76	54.00	-2.24	Average	248	20	P
2	5085.00	4.56	58.98	63.54	74.00	-10.46	Peak	248	20	P
3	5402.00	5.06	47.68	52.74	54.00	-1.26	Average	216	329	P
4	5402.00	5.06	58.94	64.00	74.00	-10.00	Peak	216	329	P
5	10480.00	11.70	43.92	55.62	68.20	-12.58	Peak	233	96	P
6	15720.00	13.12	33.07	46.19	54.00	-7.81	Average	364	90	P
7	15720.00	13.12	43.55	56.67	74.00	-17.33	Peak	364	90	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 1, CH48		:

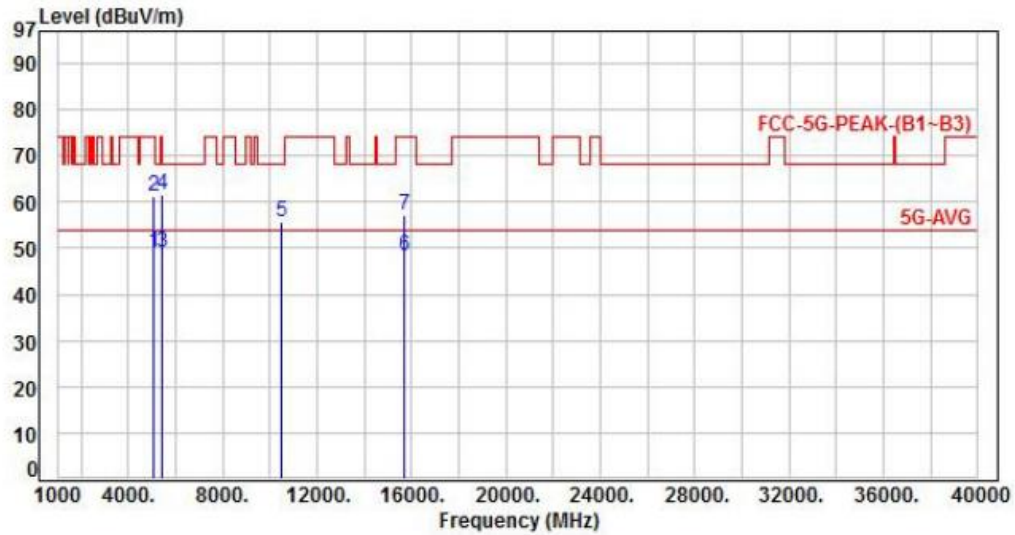


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5085.00	4.56	44.59	49.15	54.00	-4.85	Average	124	73	P
2	5085.00	4.56	56.80	61.36	74.00	-12.64	Peak	124	73	P
3	5402.00	5.06	43.98	49.04	54.00	-4.96	Average	109	44	P
4	5402.00	5.06	56.37	61.43	74.00	-12.57	Peak	109	44	P
5	10480.00	11.70	43.89	55.59	68.20	-12.61	Peak	196	49	P
6	15720.00	13.12	35.22	48.34	54.00	-5.66	Average	100	69	P
7	15720.00	13.12	43.99	57.11	74.00	-16.89	Peak	100	69	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 1, CH38		:

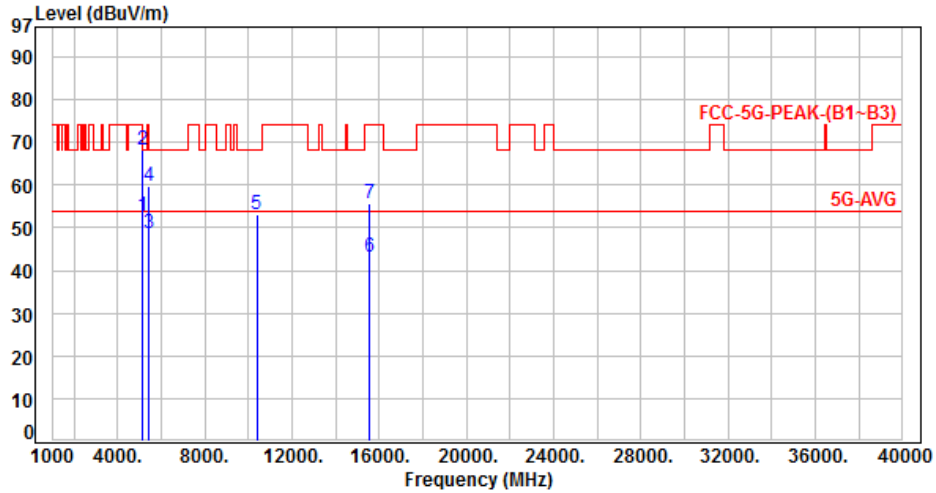


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	48.17	52.86	54.00	-1.14	Average	100	322	P
2	5150.00	4.69	63.40	68.09	74.00	-5.91	Peak	100	322	P
3	5440.00	5.16	43.48	48.64	54.00	-5.36	Average	190	312	P
4	5440.00	5.16	54.74	59.90	74.00	-14.10	Peak	190	312	P
5	10380.00	11.54	41.51	53.05	68.20	-15.15	Peak	175	289	P
6	15570.00	13.65	29.35	43.00	54.00	-11.00	Average	296	285	P
7	15570.00	13.65	41.95	55.60	74.00	-18.40	Peak	296	285	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 1, CH38		:

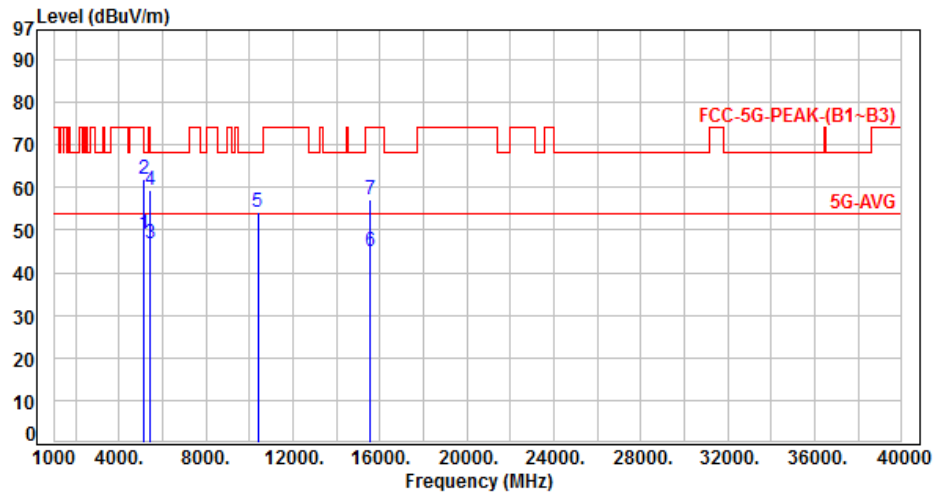

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	44.30	48.99	54.00	-5.01	Average	100	83	P
2	5150.00	4.69	57.27	61.96	74.00	-12.04	Peak	100	83	P
3	5440.00	5.16	41.62	46.78	54.00	-7.22	Average	100	64	P
4	5440.00	5.16	54.27	59.43	74.00	-14.57	Peak	100	64	P
5	10380.00	11.54	42.65	54.19	68.20	-14.01	Peak	125	322	P
6	15570.00	13.65	31.45	45.10	54.00	-8.90	Average	108	66	P
7	15570.00	13.65	43.46	57.11	74.00	-16.89	Peak	108	66	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 1, CH46		:

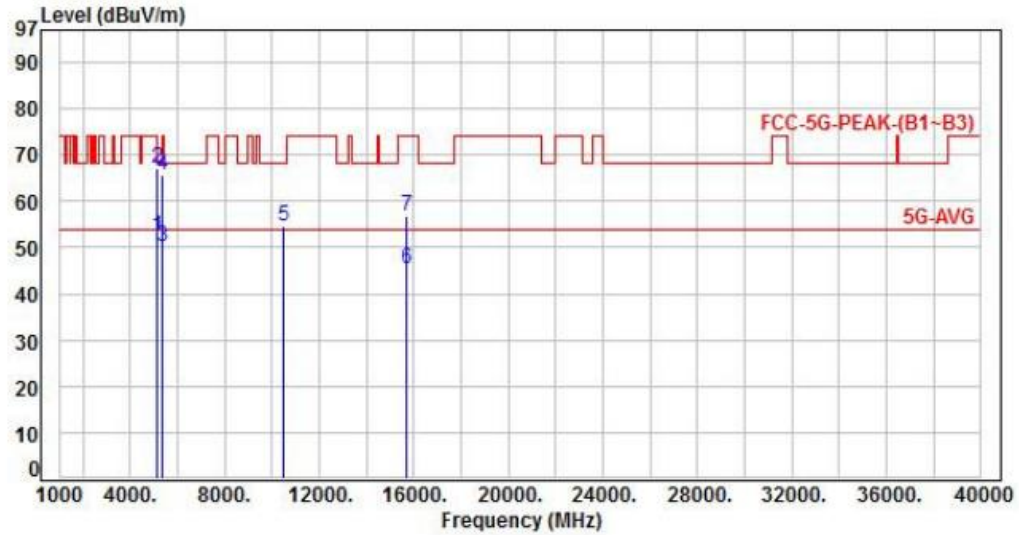


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	47.77	52.46	54.00	-1.54	Average	272	322	P
2	5150.00	4.69	62.50	67.19	74.00	-6.81	Peak	272	322	P
3	5376.00	5.04	45.05	50.09	54.00	-3.91	Average	216	299	P
4	5376.00	5.04	60.54	65.58	74.00	-8.42	Peak	216	299	P
5	10460.00	11.67	42.99	54.66	68.20	-13.54	Peak	242	288	P
6	15690.00	13.13	32.25	45.38	54.00	-8.62	Average	105	326	P
7	15690.00	13.13	43.79	56.92	74.00	-17.08	Peak	105	326	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 1, CH46		:

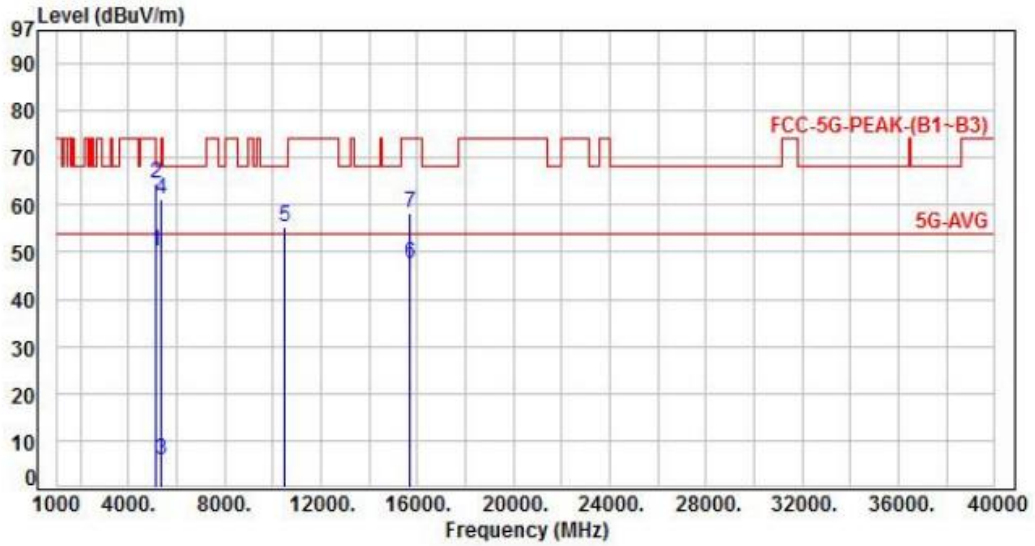


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	45.53	50.22	54.00	-3.78	Average	197	48	P
2	5150.00	4.69	59.98	64.67	74.00	-9.33	Peak	197	48	P
3	5376.00	5.04	0.96	6.00	54.00	-48.00	Average	203	44	P
4	5376.00	5.04	56.08	61.12	74.00	-12.88	Peak	203	44	P
5	10460.00	11.67	43.67	55.34	68.20	-12.86	Peak	127	353	P
6	15690.00	13.13	34.58	47.71	54.00	-6.29	Average	109	81	P
7	15690.00	13.13	45.19	58.32	74.00	-15.68	Peak	109	81	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, Band 1, CH42		:

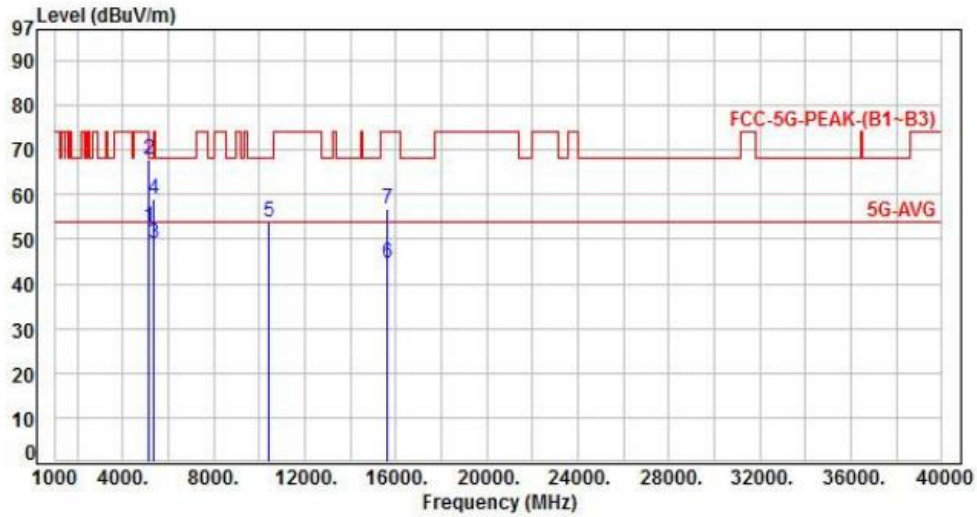


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	48.03	52.72	54.00	-1.28	Average	200	335	P
2	5150.00	4.69	63.04	67.73	74.00	-6.27	Peak	200	335	P
3	5350.00	5.02	43.98	49.00	54.00	-5.00	Average	207	119	P
4	5350.00	5.02	54.07	59.09	74.00	-14.91	Peak	207	119	P
5	10420.00	11.61	42.20	53.81	68.20	-14.39	Peak	100	54	P
6	15630.00	13.34	31.17	44.51	54.00	-9.49	Average	100	79	P
7	15630.00	13.34	43.51	56.85	74.00	-17.15	Peak	100	79	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, Band 1, CH42		:

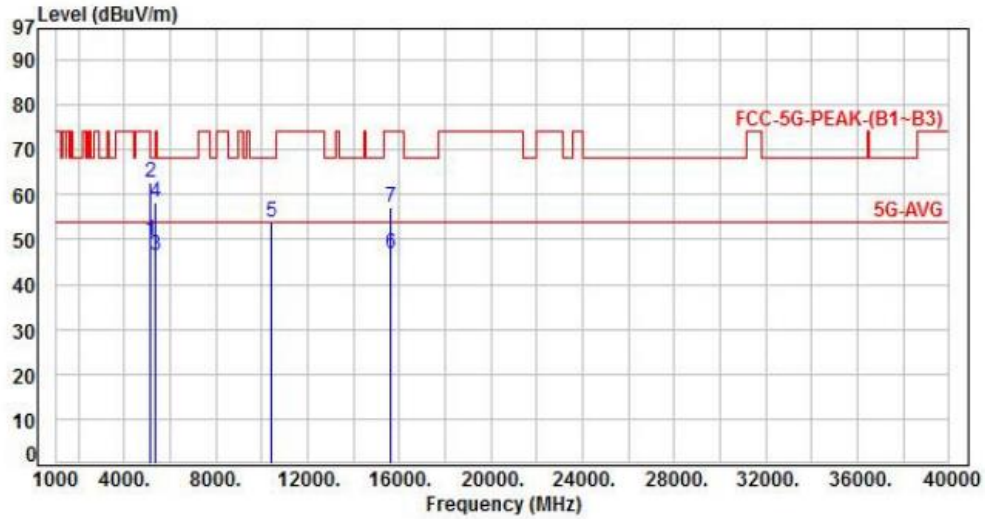


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	45.07	49.76	54.00	-4.24	Average	189	51	P
2	5150.00	4.69	57.88	62.57	74.00	-11.43	Peak	189	51	P
3	5350.00	5.02	41.32	46.34	54.00	-7.66	Average	189	51	P
4	5350.00	5.02	53.09	58.11	74.00	-15.89	Peak	189	51	P
5	10420.00	11.61	42.18	53.79	68.20	-14.41	Peak	100	71	P
6	15630.00	13.34	33.42	46.76	54.00	-7.24	Average	121	35	P
7	15630.00	13.34	43.85	57.19	74.00	-16.81	Peak	121	35	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 2, CH52		:

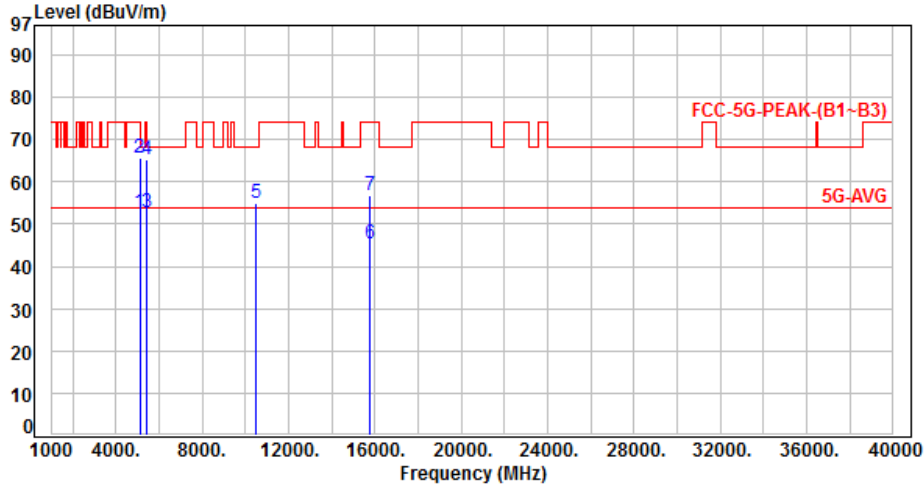


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5101.00	4.56	48.10	52.66	54.00	-1.34	Average	254	22	P
2	5101.00	4.56	60.93	65.49	74.00	-8.51	Peak	254	22	P
3	5418.00	5.11	47.67	52.78	54.00	-1.22	Average	148	298	P
4	5418.00	5.11	60.19	65.30	74.00	-8.70	Peak	148	298	P
5	10520.00	11.79	43.04	54.83	68.20	-13.37	Peak	382	101	P
6	15780.00	13.21	32.32	45.53	54.00	-8.47	Average	100	88	P
7	15780.00	13.21	43.48	56.69	74.00	-17.31	Peak	100	88	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 2, CH52		:

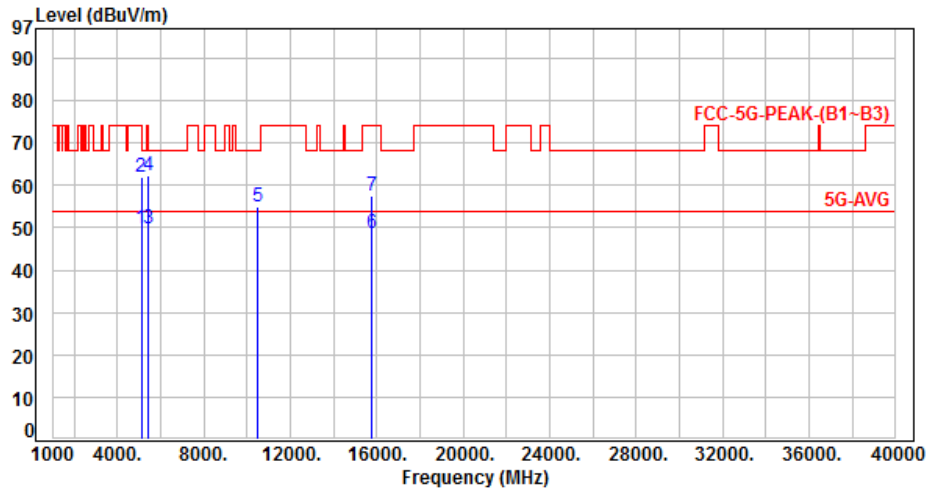


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5101.00	4.56	45.05	49.61	54.00	-4.39	Average	220	44	P
2	5101.00	4.56	57.55	62.11	74.00	-11.89	Peak	220	44	P
3	5418.00	5.11	44.50	49.61	54.00	-4.39	Average	193	37	P
4	5418.00	5.11	57.29	62.40	74.00	-11.60	Peak	193	37	P
5	10520.00	11.79	43.19	54.98	68.20	-13.22	Peak	193	37	P
6	15780.00	13.21	35.47	48.68	54.00	-5.32	Average	100	67	P
7	15780.00	13.21	44.36	57.57	74.00	-16.43	Peak	100	67	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 2, CH60		

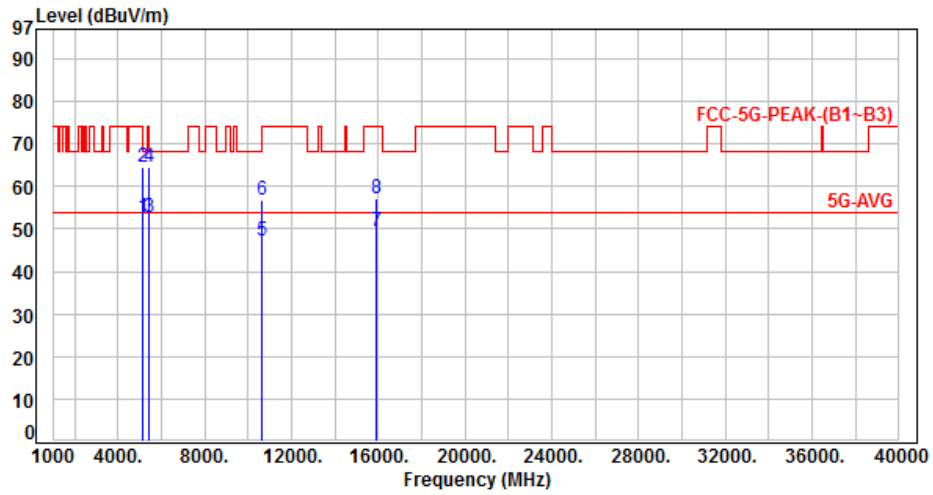


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.00	4.68	48.24	52.92	54.00	-1.08	Average	241	25	P
2	5147.00	4.68	59.94	64.62	74.00	-9.38	Peak	241	25	P
3	5453.00	5.19	47.46	52.65	54.00	-1.35	Average	243	299	P
4	5453.00	5.19	59.38	64.57	74.00	-9.43	Peak	243	299	P
5	10600.00	12.03	35.35	47.38	54.00	-6.62	Average	182	278	P
6	10600.00	12.03	44.74	56.77	74.00	-17.23	Peak	182	278	P
7	15900.00	12.98	36.28	49.26	54.00	-4.74	Average	370	70	P
8	15900.00	12.98	44.37	57.35	74.00	-16.65	Peak	370	70	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 2, CH60		:

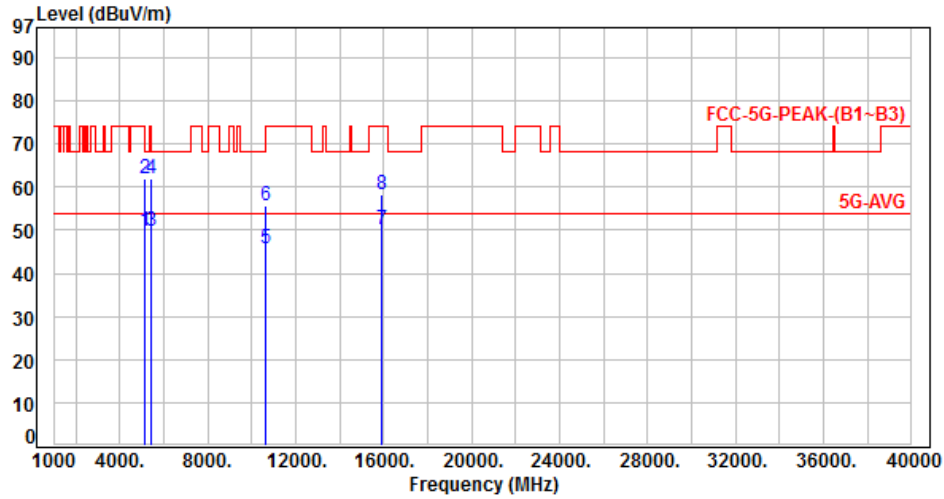


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.00	4.68	45.25	49.93	54.00	-4.07	Average	191	66	P
2	5147.00	4.68	57.12	61.80	74.00	-12.20	Peak	191	66	P
3	5453.00	5.19	44.72	49.91	54.00	-4.09	Average	169	39	P
4	5453.00	5.19	56.83	62.02	74.00	-11.98	Peak	169	39	P
5	10600.00	12.03	33.67	45.70	54.00	-8.30	Average	197	72	P
6	10600.00	12.03	43.73	55.76	74.00	-18.24	Peak	197	72	P
7	15900.00	12.98	37.24	50.22	54.00	-3.78	Average	100	71	P
8	15900.00	12.98	45.37	58.35	74.00	-15.65	Peak	100	71	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 2, CH64		:

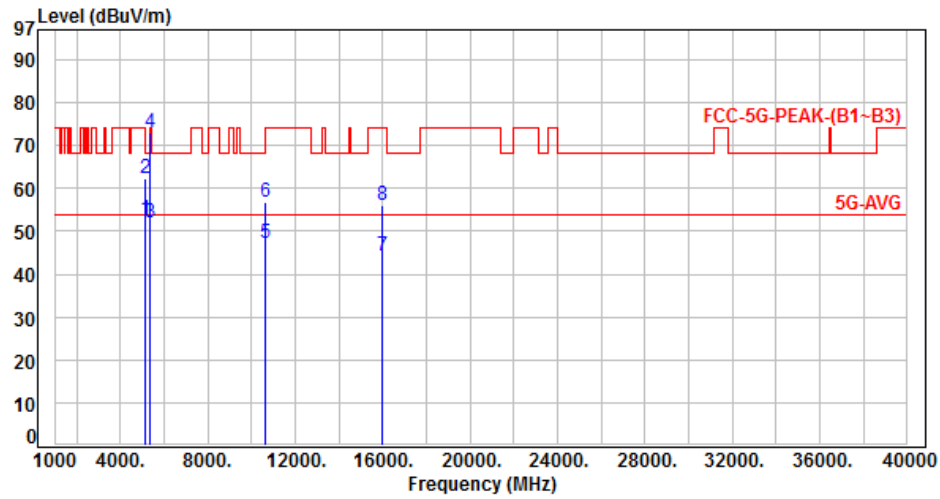


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	47.97	52.58	54.00	-1.42	Average	209	70	P
2	5120.00	4.61	57.65	62.26	74.00	-11.74	Peak	209	70	P
3	5350.00	5.02	46.95	51.97	54.00	-2.03	Average	171	300	P
4	5350.00	5.02	67.93	72.95	74.00	-1.05	Peak	171	300	P
5	10640.00	12.02	35.12	47.14	54.00	-6.86	Average	258	279	P
6	10640.00	12.02	44.74	56.76	74.00	-17.24	Peak	258	279	P
7	15960.00	12.88	31.30	44.18	54.00	-9.82	Average	100	91	P
8	15960.00	12.88	43.23	56.11	74.00	-17.89	Peak	100	91	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 2, CH64		:

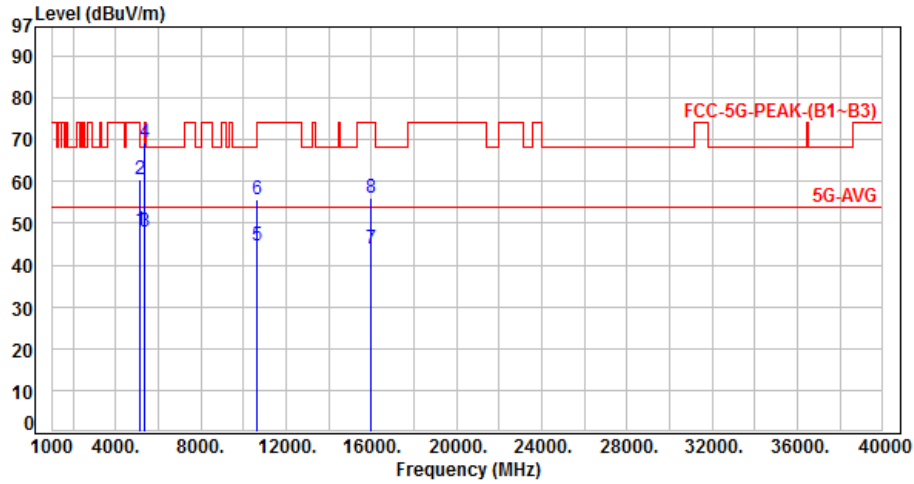


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.83	48.44	54.00	-5.56	Average	198	135	P
2	5120.00	4.61	55.70	60.31	74.00	-13.69	Peak	198	135	P
3	5350.00	5.02	43.02	48.04	54.00	-5.96	Average	200	47	P
4	5350.00	5.02	64.13	69.15	74.00	-4.85	Peak	200	47	P
5	10640.00	12.02	32.69	44.71	54.00	-9.29	Average	136	8	P
6	10640.00	12.02	43.57	55.59	74.00	-18.41	Peak	136	8	P
7	15960.00	12.88	31.17	44.05	54.00	-9.95	Average	113	353	P
8	15960.00	12.88	43.31	56.19	74.00	-17.81	Peak	113	353	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 2, CH54		:

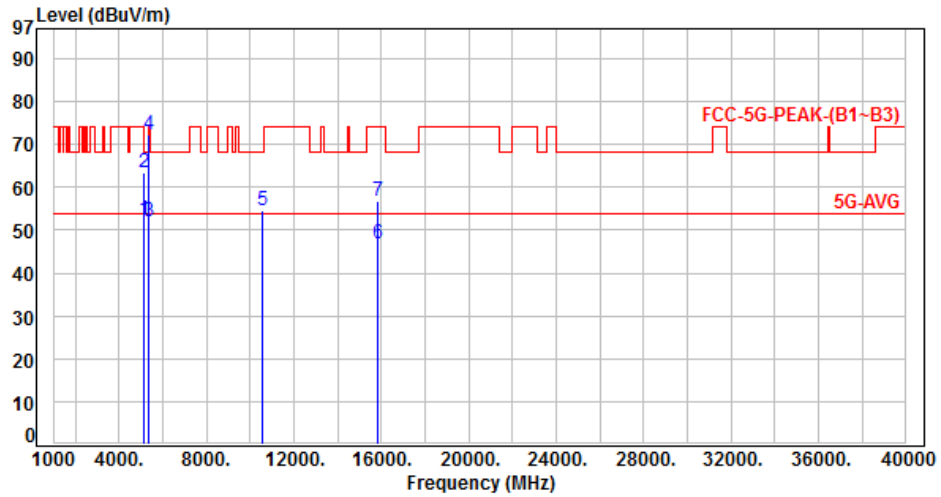


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	47.93	52.54	54.00	-1.46	Average	224	73	P
2	5120.00	4.61	58.88	63.49	74.00	-10.51	Peak	224	73	P
3	5350.00	5.02	46.84	51.86	54.00	-2.14	Average	200	304	P
4	5350.00	5.02	67.21	72.23	74.00	-1.77	Peak	200	304	P
5	10540.00	11.85	42.83	54.68	68.20	-13.52	Peak	148	267	P
6	15810.00	13.21	33.69	46.90	54.00	-7.10	Average	302	264	P
7	15810.00	13.21	43.51	56.72	74.00	-17.28	Peak	302	264	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 2, CH54		:

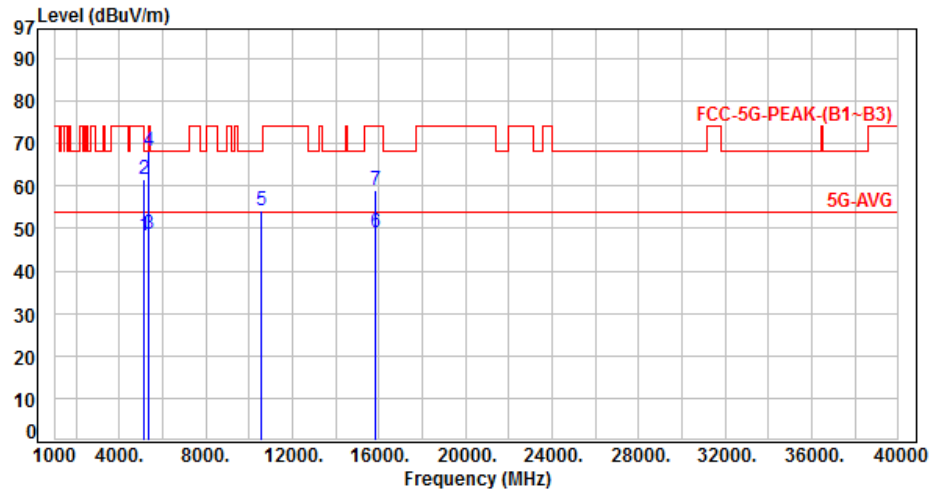


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.73	48.34	54.00	-5.66	Average	170	74	P
2	5120.00	4.61	57.13	61.74	74.00	-12.26	Peak	170	74	P
3	5350.00	5.02	43.49	48.51	54.00	-5.49	Average	101	61	P
4	5350.00	5.02	63.17	68.19	74.00	-5.81	Peak	101	61	P
5	10540.00	11.85	42.49	54.34	68.20	-13.86	Peak	125	68	P
6	15810.00	13.21	35.66	48.87	54.00	-5.13	Average	108	79	P
7	15810.00	13.21	45.84	59.05	74.00	-14.95	Peak	108	79	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 2, CH62		:

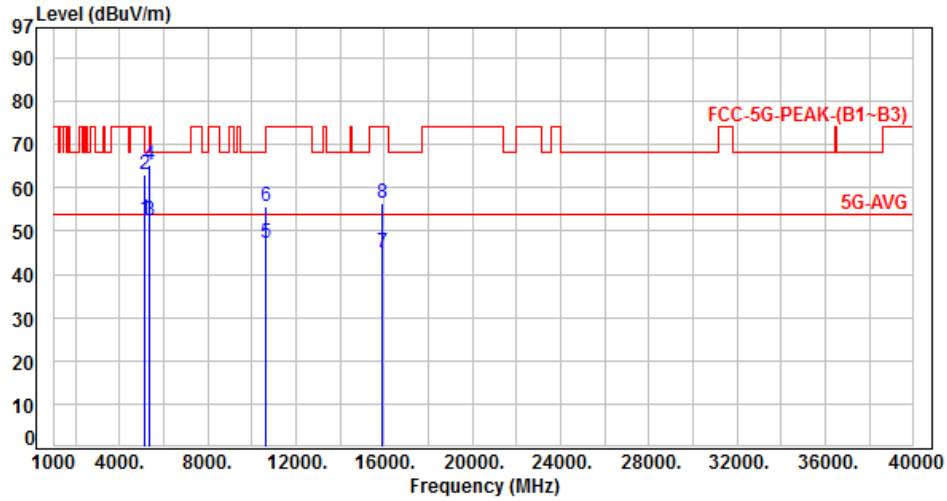


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	48.04	52.65	54.00	-1.35	Average	238	76	P
2	5120.00	4.61	58.63	63.24	74.00	-10.76	Peak	238	76	P
3	5350.00	5.02	47.47	52.49	54.00	-1.51	Average	168	302	P
4	5350.00	5.02	60.37	65.39	74.00	-8.61	Peak	168	302	P
5	10620.00	12.03	35.31	47.34	54.00	-6.66	Average	252	283	P
6	10620.00	12.03	43.78	55.81	74.00	-18.19	Peak	252	283	P
7	15930.00	12.93	32.04	44.97	54.00	-9.03	Average	371	258	P
8	15930.00	12.93	43.52	56.45	74.00	-17.55	Peak	371	258	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 2, CH62		:

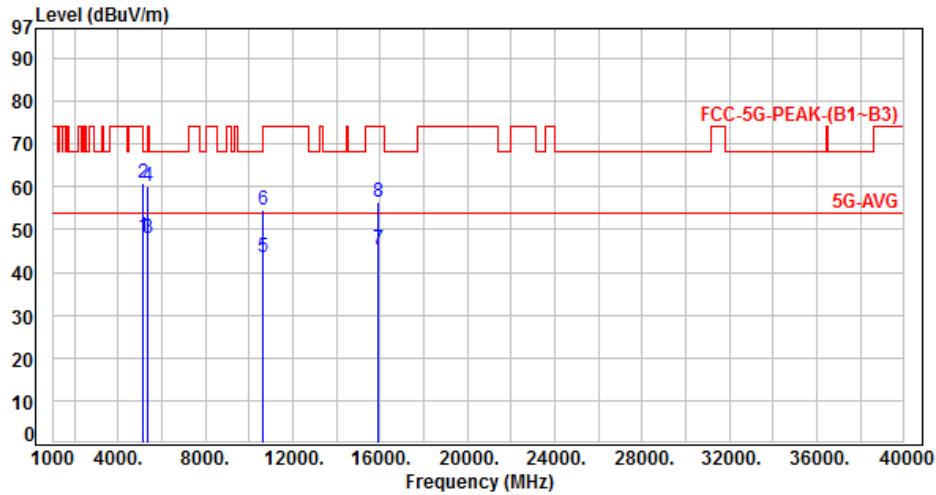


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.62	48.23	54.00	-5.77	Average	138	71	P
2	5120.00	4.61	56.13	60.74	74.00	-13.26	Peak	138	71	P
3	5350.00	5.02	43.07	48.09	54.00	-5.91	Average	122	39	P
4	5350.00	5.02	55.26	60.28	74.00	-13.72	Peak	122	39	P
5	10620.00	12.03	31.40	43.43	54.00	-10.57	Average	121	68	P
6	10620.00	12.03	42.62	54.65	74.00	-19.35	Peak	121	68	P
7	15930.00	12.93	32.57	45.50	54.00	-8.50	Average	102	74	P
8	15930.00	12.93	43.48	56.41	74.00	-17.59	Peak	102	74	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 15, Band 2, CH58		:

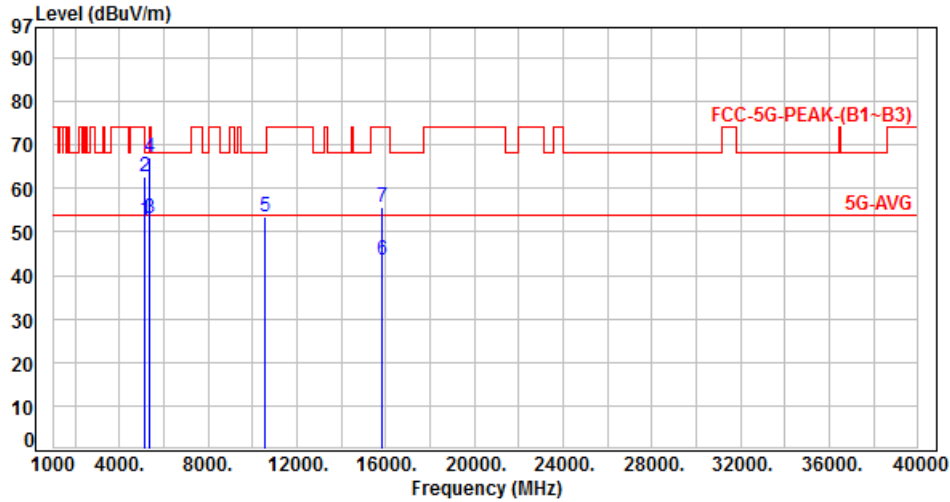


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	47.97	52.58	54.00	-1.42	Average	234	75	P
2	5120.00	4.61	58.26	62.87	74.00	-11.13	Peak	234	75	P
3	5350.00	5.02	47.91	52.93	54.00	-1.07	Average	204	24	P
4	5350.00	5.02	62.19	67.21	74.00	-6.79	Peak	204	24	P
5	10580.00	11.97	41.67	53.64	68.20	-14.56	Peak	100	59	P
6	15870.00	13.06	30.48	43.54	54.00	-10.46	Average	100	92	P
7	15870.00	13.06	42.78	55.84	74.00	-18.16	Peak	100	92	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 15, Band 2, CH58		:

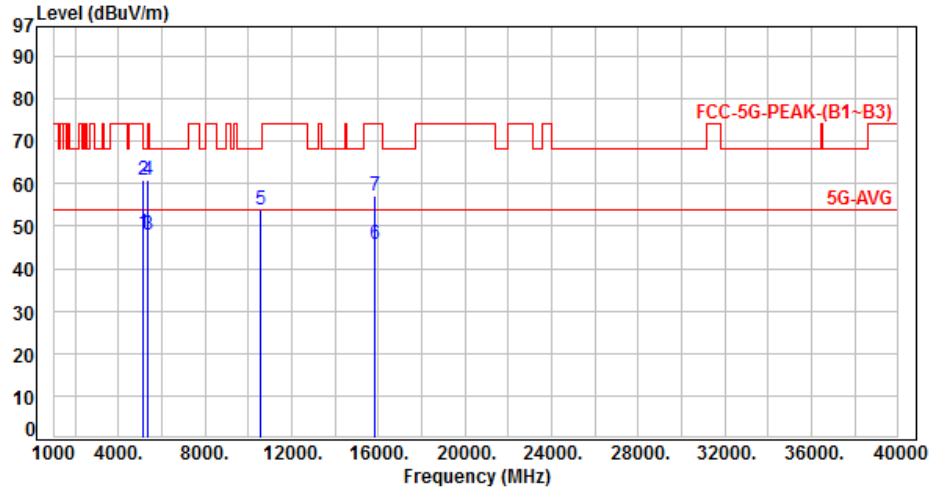


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.68	48.29	54.00	-5.71	Average	138	74	P
2	5120.00	4.61	56.19	60.80	74.00	-13.20	Peak	138	74	P
3	5350.00	5.02	43.09	48.11	54.00	-5.89	Average	192	44	P
4	5350.00	5.02	55.68	60.70	74.00	-13.30	Peak	192	44	P
5	10580.00	11.97	41.96	53.93	68.20	-14.27	Peak	100	72	P
6	15870.00	13.06	32.58	45.64	54.00	-8.36	Average	100	45	P
7	15870.00	13.06	44.05	57.11	74.00	-16.89	Peak	100	45	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 2, CH52		:

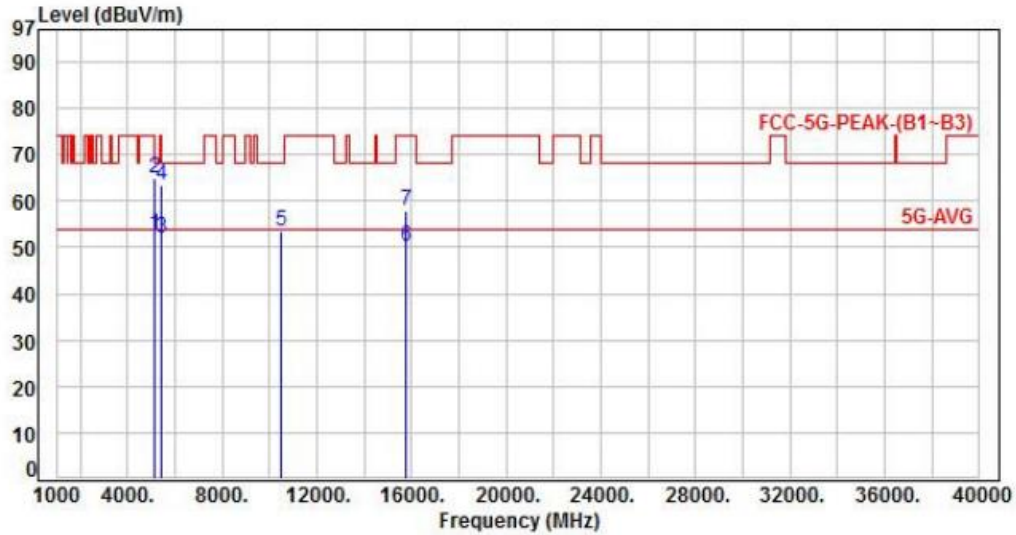


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5106.00	4.58	48.09	52.67	54.00	-1.33	Average	185	24	P
2	5106.00	4.58	60.21	64.79	74.00	-9.21	Peak	185	24	P
3	5426.00	5.12	47.06	52.18	54.00	-1.82	Average	144	300	P
4	5426.00	5.12	58.42	63.54	74.00	-10.46	Peak	144	300	P
5	10520.00	11.79	41.85	53.64	68.20	-14.56	Peak	214	94	P
6	15780.00	13.21	36.98	50.19	54.00	-3.81	Average	375	62	P
7	15780.00	13.21	44.78	57.99	74.00	-16.01	Peak	375	62	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 2, CH52		:

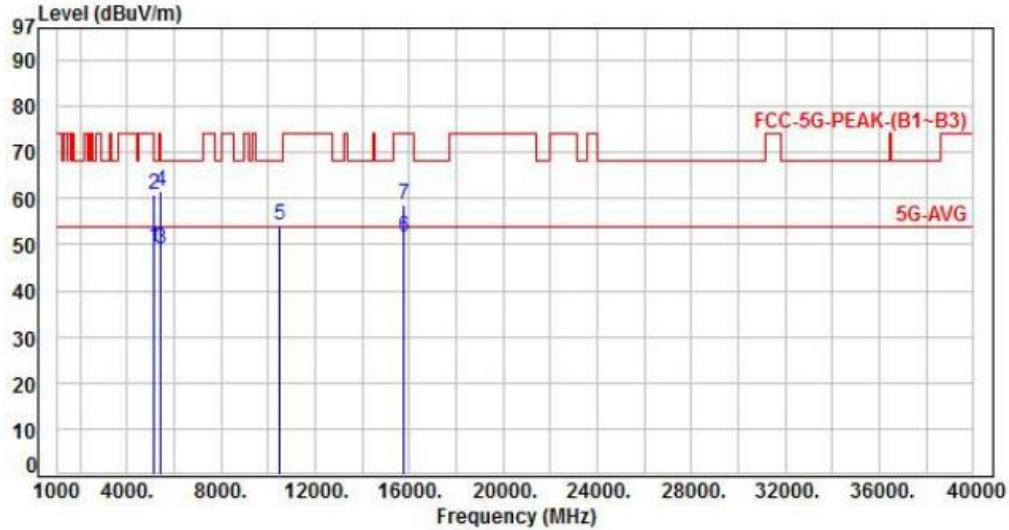


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5106.00	4.58	44.97	49.55	54.00	-4.45	Average	214	63	P
2	5106.00	4.58	56.34	60.92	74.00	-13.08	Peak	214	63	P
3	5426.00	5.12	43.96	49.08	54.00	-4.92	Average	165	43	P
4	5426.00	5.12	56.37	61.49	74.00	-12.51	Peak	165	43	P
5	10520.00	11.79	42.58	54.37	68.20	-13.83	Peak	100	73	P
6	15780.00	13.21	38.25	51.46	54.00	-2.54	Average	100	68	P
7	15780.00	13.21	45.27	58.48	74.00	-15.52	Peak	100	68	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 2, CH60		

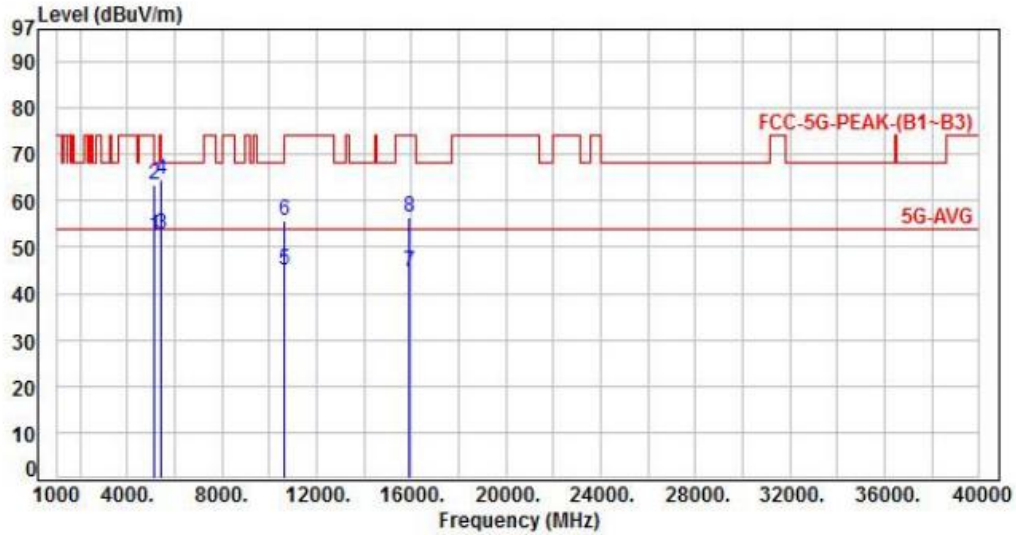


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5146.00	4.68	47.52	52.20	54.00	-1.80	Average	208	19	P
2	5146.00	4.68	58.82	63.50	74.00	-10.50	Peak	208	19	P
3	5452.00	5.19	47.68	52.87	54.00	-1.13	Average	207	296	P
4	5452.00	5.19	59.33	64.52	74.00	-9.48	Peak	207	296	P
5	10600.00	12.03	33.15	45.18	54.00	-8.82	Average	282	280	P
6	10600.00	12.03	43.51	55.54	74.00	-18.46	Peak	282	280	P
7	15900.00	12.98	31.82	44.80	54.00	-9.20	Average	328	93	P
8	15900.00	12.98	43.59	56.57	74.00	-17.43	Peak	328	93	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 2, CH60		:

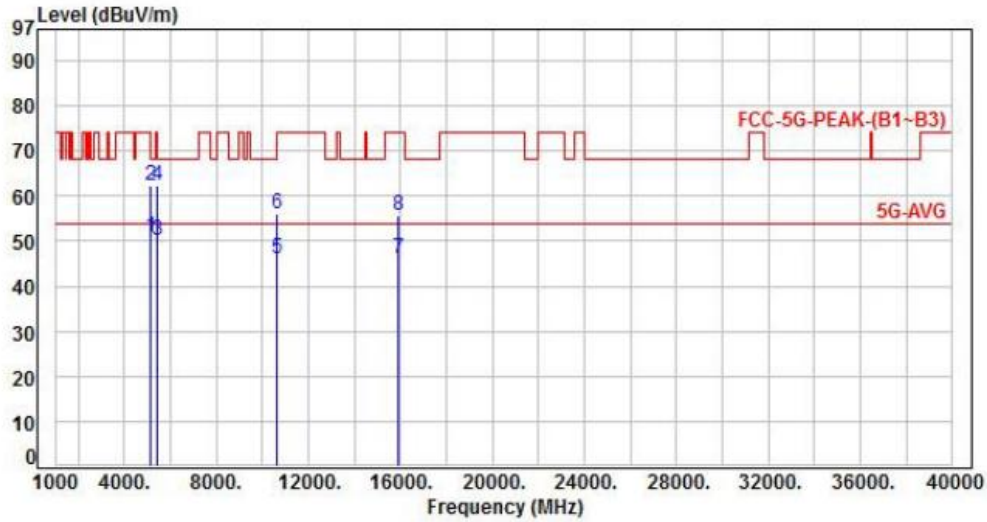


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5146.00	4.68	46.06	50.74	54.00	-3.26	Average	118	47	P
2	5146.00	4.68	57.76	62.44	74.00	-11.56	Peak	118	47	P
3	5452.00	5.19	44.80	49.99	54.00	-4.01	Average	111	32	P
4	5452.00	5.19	57.32	62.51	74.00	-11.49	Peak	111	32	P
5	10600.00	12.03	33.98	46.01	54.00	-7.99	Average	178	70	P
6	10600.00	12.03	44.14	56.17	74.00	-17.83	Peak	178	70	P
7	15900.00	12.98	33.10	46.08	54.00	-7.92	Average	100	346	P
8	15900.00	12.98	42.69	55.67	74.00	-18.33	Peak	100	346	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 2, CH64		:

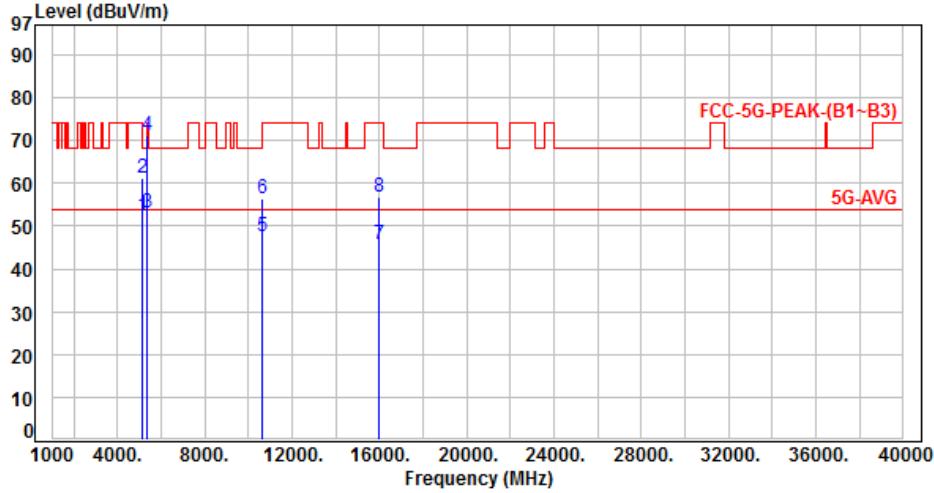


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	47.83	52.44	54.00	-1.56	Average	205	71	P
2	5120.00	4.61	56.52	61.13	74.00	-12.87	Peak	205	71	P
3	5350.00	5.02	47.92	52.94	54.00	-1.06	Average	222	299	P
4	5350.00	5.02	66.23	71.25	74.00	-2.75	Peak	222	299	P
5	10640.00	12.02	35.48	47.50	54.00	-6.50	Average	241	214	P
6	10640.00	12.02	44.51	56.53	74.00	-17.47	Peak	241	214	P
7	15960.00	12.88	32.74	45.62	54.00	-8.38	Average	169	91	P
8	15960.00	12.88	43.94	56.82	74.00	-17.18	Peak	169	91	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 2, CH64		:

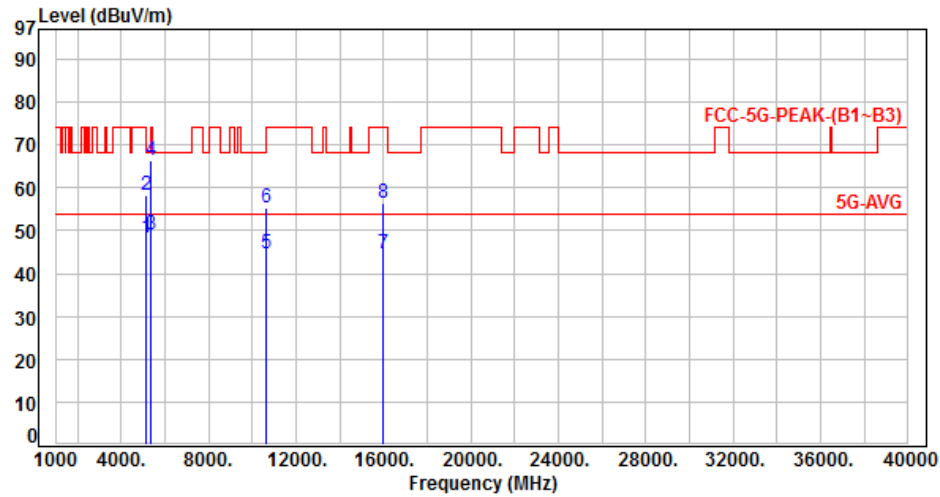


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.75	48.36	54.00	-5.64	Average	199	132	P
2	5120.00	4.61	53.55	58.16	74.00	-15.84	Peak	199	132	P
3	5350.00	5.02	44.04	49.06	54.00	-4.94	Average	190	48	P
4	5350.00	5.02	61.26	66.28	74.00	-7.72	Peak	190	48	P
5	10640.00	12.02	32.58	44.60	54.00	-9.40	Average	121	17	P
6	10640.00	12.02	43.16	55.18	74.00	-18.82	Peak	121	17	P
7	15960.00	12.88	31.92	44.80	54.00	-9.20	Average	100	352	P
8	15960.00	12.88	43.39	56.27	74.00	-17.73	Peak	100	352	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 2, CH54		:

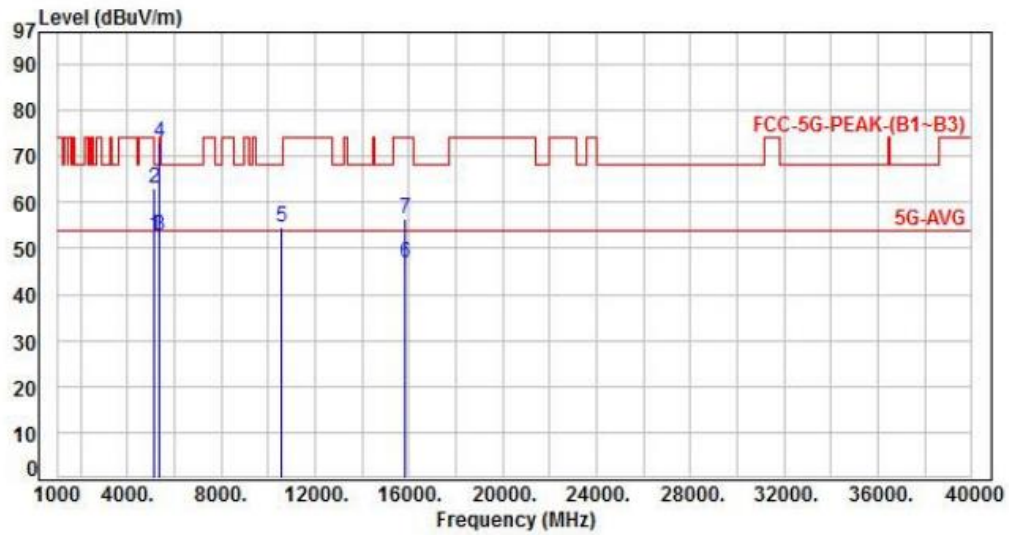


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5124.00	4.63	47.97	52.60	54.00	-1.40	Average	222	29	P
2	5124.00	4.63	58.59	63.22	74.00	-10.78	Peak	222	29	P
3	5350.00	5.02	47.66	52.68	54.00	-1.32	Average	143	301	P
4	5350.00	5.02	67.89	72.91	74.00	-1.09	Peak	143	301	P
5	10540.00	11.85	42.69	54.54	68.20	-13.66	Peak	142	263	P
6	15810.00	13.21	33.51	46.72	54.00	-7.28	Average	305	262	P
7	15810.00	13.21	43.22	56.43	74.00	-17.57	Peak	305	262	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 2, CH54		:

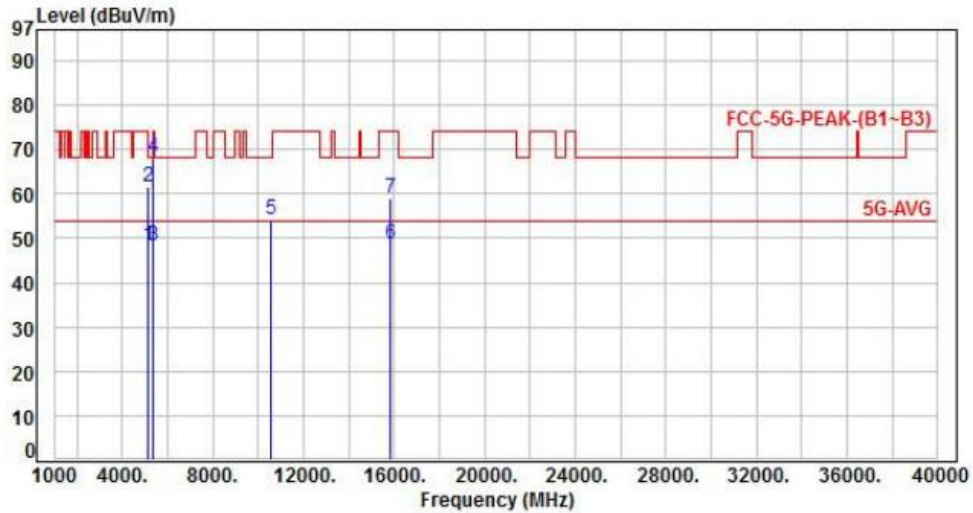


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5124.00	4.63	43.53	48.16	54.00	-5.84	Average	168	72	P
2	5124.00	4.63	57.09	61.72	74.00	-12.28	Peak	168	72	P
3	5350.00	5.02	43.18	48.20	54.00	-5.80	Average	134	52	P
4	5350.00	5.02	63.27	68.29	74.00	-5.71	Peak	134	52	P
5	10540.00	11.85	42.32	54.17	68.20	-14.03	Peak	137	62	P
6	15810.00	13.21	35.48	48.69	54.00	-5.31	Average	114	74	P
7	15810.00	13.21	45.68	58.89	74.00	-15.11	Peak	114	74	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 2, CH62		:

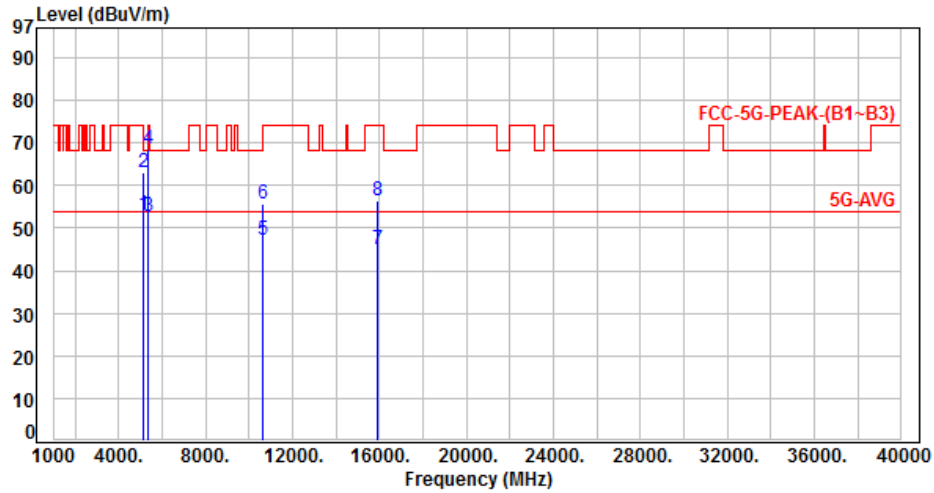


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	48.38	52.99	54.00	-1.01	Average	235	74	P
2	5120.00	4.61	58.48	63.09	74.00	-10.91	Peak	235	74	P
3	5350.00	5.02	47.55	52.57	54.00	-1.43	Average	165	302	P
4	5350.00	5.02	63.59	68.61	74.00	-5.39	Peak	165	302	P
5	10620.00	12.03	35.16	47.19	54.00	-6.81	Average	255	279	P
6	10620.00	12.03	43.59	55.62	74.00	-18.38	Peak	255	279	P
7	15930.00	12.93	31.89	44.82	54.00	-9.18	Average	374	261	P
8	15930.00	12.93	43.36	56.29	74.00	-17.71	Peak	374	261	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 2, CH62		

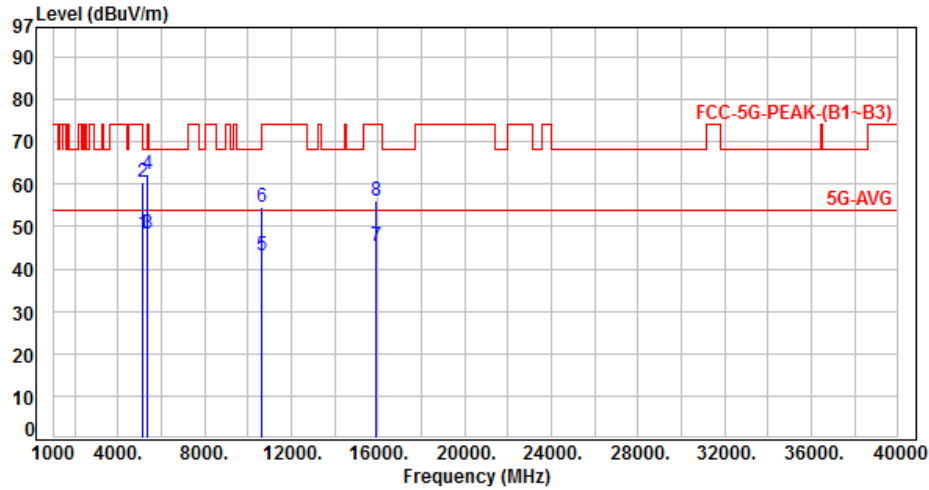


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.56	48.17	54.00	-5.83	Average	135	68	P
2	5120.00	4.61	55.87	60.48	74.00	-13.52	Peak	135	68	P
3	5350.00	5.02	43.12	48.14	54.00	-5.86	Average	168	44	P
4	5350.00	5.02	57.26	62.28	74.00	-11.72	Peak	168	44	P
5	10620.00	12.03	31.22	43.25	54.00	-10.75	Average	119	69	P
6	10620.00	12.03	42.48	54.51	74.00	-19.49	Peak	119	69	P
7	15930.00	12.93	32.34	45.27	54.00	-8.73	Average	100	72	P
8	15930.00	12.93	43.21	56.14	74.00	-17.86	Peak	100	72	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, Band 2, CH58		:

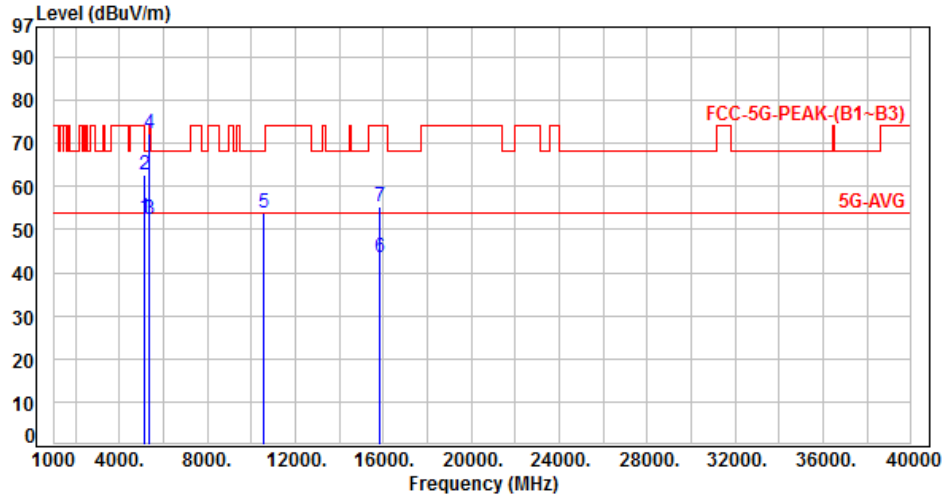


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	48.07	52.68	54.00	-1.32	Average	224	78	P
2	5120.00	4.61	58.03	62.64	74.00	-11.36	Peak	224	78	P
3	5350.00	5.02	47.31	52.33	54.00	-1.67	Average	215	360	P
4	5350.00	5.02	67.32	72.34	74.00	-1.66	Peak	215	360	P
5	10580.00	11.97	41.82	53.79	68.20	-14.41	Peak	251	282	P
6	15870.00	13.06	30.33	43.39	54.00	-10.61	Average	373	258	P
7	15870.00	13.06	42.36	55.42	74.00	-18.58	Peak	373	258	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, Band 2, CH58		:

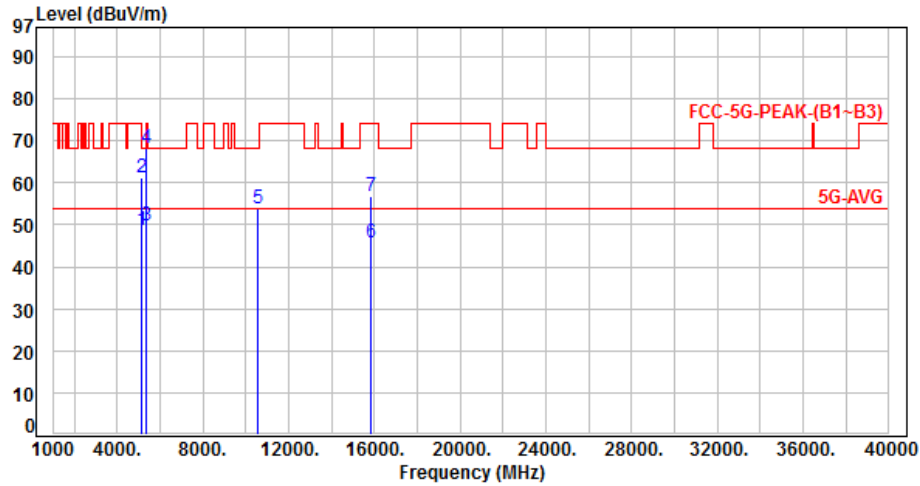


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.00	4.61	43.95	48.56	54.00	-5.44	Average	100	67	P
2	5120.00	4.61	56.50	61.11	74.00	-12.89	Peak	100	67	P
3	5350.00	5.02	44.73	49.75	54.00	-4.25	Average	176	51	P
4	5350.00	5.02	63.39	68.41	74.00	-5.59	Peak	176	51	P
5	10580.00	11.97	41.75	53.72	68.20	-14.48	Peak	100	69	P
6	15870.00	13.06	32.69	45.75	54.00	-8.25	Average	100	41	P
7	15870.00	13.06	43.81	56.87	74.00	-17.13	Peak	100	41	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 3, CH100		:

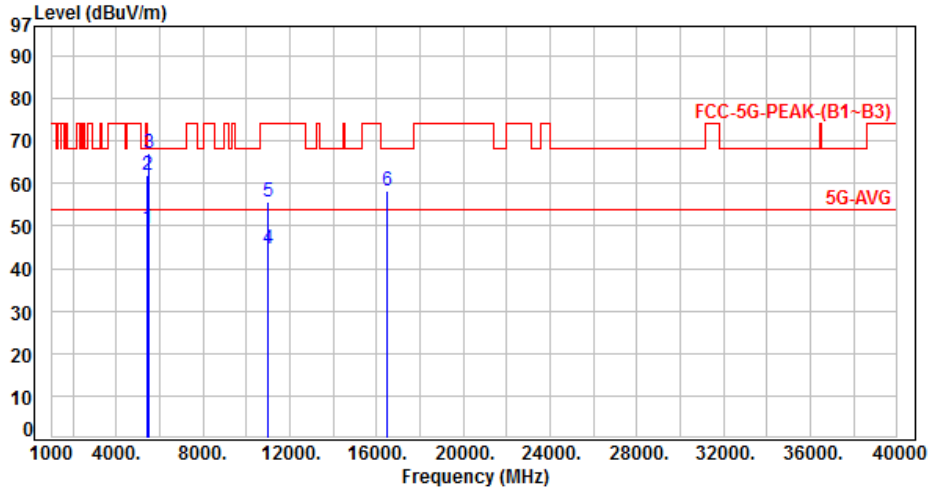


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	5.16	44.35	49.51	54.00	-4.49	Average	100	297	P
2	5440.00	5.16	56.65	61.81	74.00	-12.19	Peak	100	297	P
3	5470.00	5.20	61.96	67.16	68.20	-1.04	Peak	280	298	P
4	11000.00	12.41	32.36	44.77	54.00	-9.23	Average	197	311	P
5	11000.00	12.41	43.14	55.55	74.00	-18.45	Peak	197	311	P
6	16500.00	14.43	43.86	58.29	68.20	-9.91	Peak	100	118	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 3, CH100		:

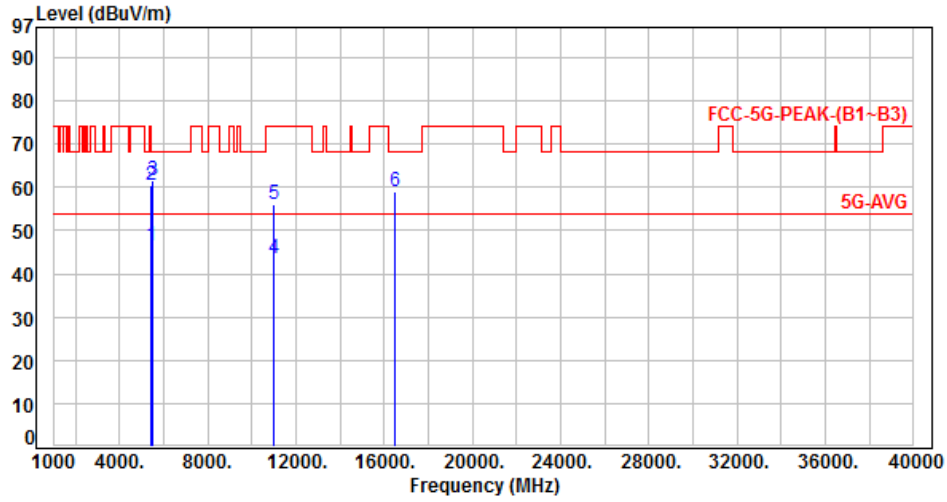


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	5.16	41.29	46.45	54.00	-7.55	Average	100	172	P
2	5440.00	5.16	55.15	60.31	74.00	-13.69	Peak	100	172	P
3	5470.00	5.20	56.42	61.62	68.20	-6.58	Peak	182	56	P
4	11000.00	12.41	31.08	43.49	54.00	-10.51	Average	122	51	P
5	11000.00	12.41	43.65	56.06	74.00	-17.94	Peak	122	51	P
6	16500.00	14.43	44.63	59.06	68.20	-9.14	Peak	101	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 3, CH120		

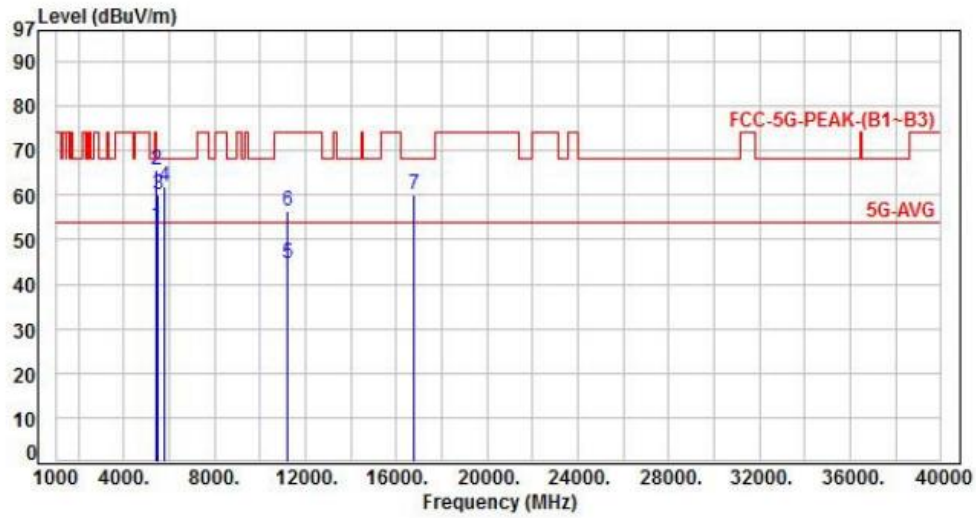


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5447.00	5.17	47.82	52.99	54.00	-1.01	Average	206	313	P
2	5447.00	5.17	60.60	65.77	74.00	-8.23	Peak	206	313	P
3	5470.00	5.20	54.98	60.18	68.20	-8.02	Peak	206	313	P
4	5760.00	5.16	56.85	62.01	68.20	-6.19	Peak	100	359	P
5	11200.00	12.72	32.04	44.76	54.00	-9.24	Average	195	316	P
6	11200.00	12.72	43.53	56.25	74.00	-17.75	Peak	195	316	P
7	16800.00	16.56	43.70	60.26	68.20	-7.94	Peak	100	115	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 3, CH120		:

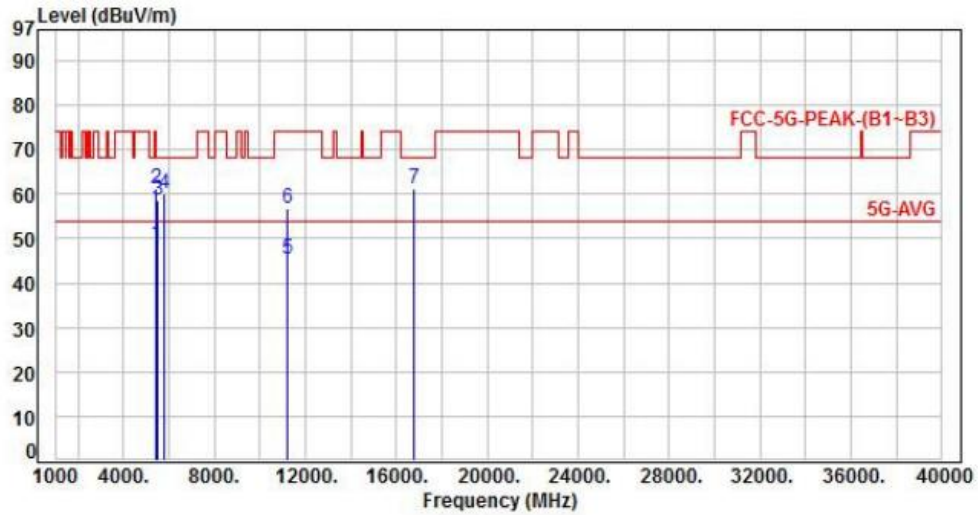


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5447.00	5.17	43.63	48.80	54.00	-5.20	Average	148	271	P
2	5447.00	5.17	56.20	61.37	74.00	-12.63	Peak	148	271	P
3	5470.00	5.20	53.48	58.68	68.20	-9.52	Peak	148	271	P
4	5760.00	5.16	54.93	60.09	68.20	-8.11	Peak	118	41	P
5	11200.00	12.72	32.49	45.21	54.00	-8.79	Average	126	52	P
6	11200.00	12.72	44.12	56.84	74.00	-17.16	Peak	126	52	P
7	16800.00	16.56	44.53	61.09	68.20	-7.11	Peak	101	77	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 3, CH140		:

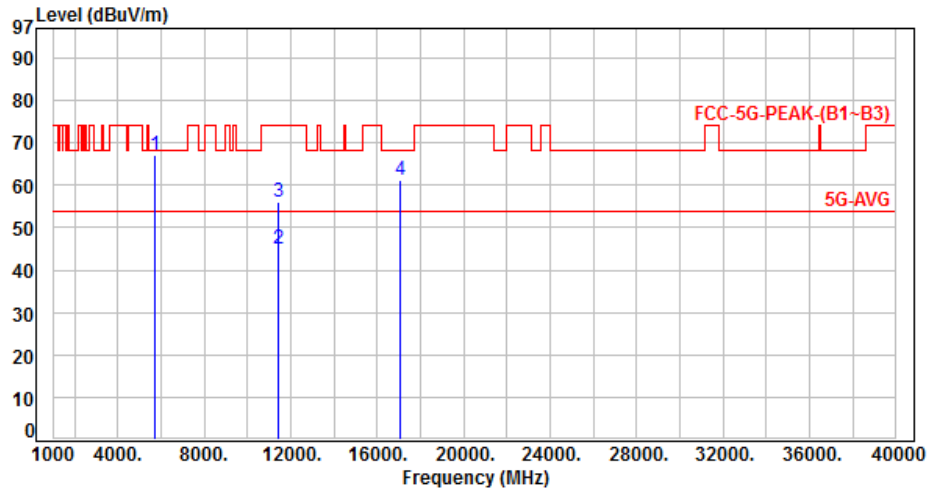


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	5.14	61.84	66.98	68.20	-1.22	Peak	223	357	P
2	11400.00	12.94	31.92	44.86	54.00	-9.14	Average	206	295	P
3	11400.00	12.94	43.27	56.21	74.00	-17.79	Peak	206	295	P
4	17100.00	18.03	43.28	61.31	68.20	-6.89	Peak	100	105	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 3, CH140		:

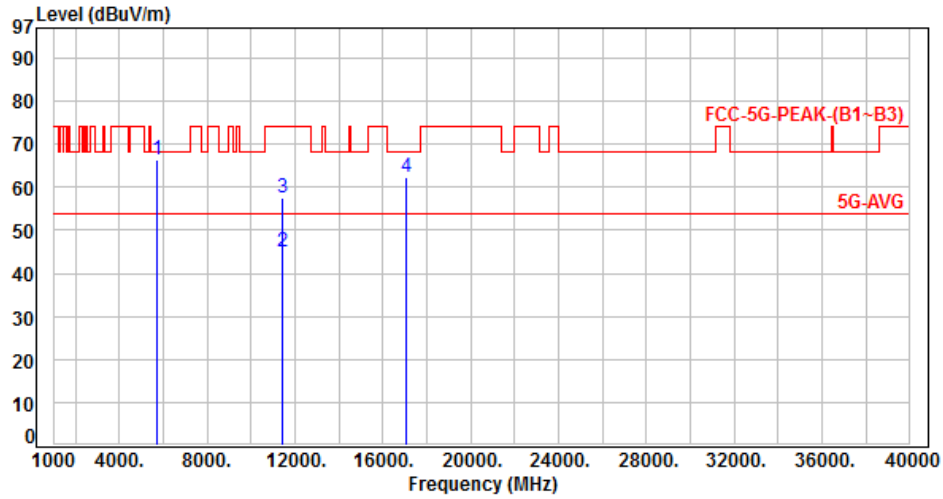


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	5.14	61.32	66.46	68.20	-1.74	Peak	125	44	P
2	11400.00	12.94	32.19	45.13	54.00	-8.87	Average	116	48	P
3	11400.00	12.94	44.76	57.70	74.00	-16.30	Peak	116	48	P
4	17100.00	18.03	44.34	62.37	68.20	-5.83	Peak	100	59	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 3, CH102		:

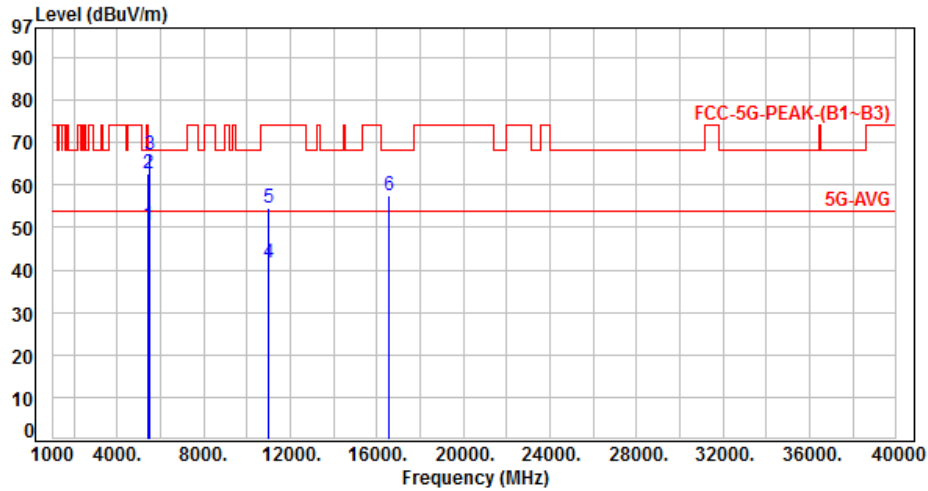


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	45.16	50.36	54.00	-3.64	Average	198	15	P
2	5460.00	5.20	57.36	62.56	74.00	-11.44	Peak	198	15	P
3	5470.00	5.20	61.86	67.06	68.20	-1.14	Peak	198	15	P
4	11020.00	12.44	29.12	41.56	54.00	-12.44	Average	177	279	P
5	11020.00	12.44	41.97	54.41	74.00	-19.59	Peak	177	279	P
6	16530.00	14.68	42.85	57.53	68.20	-10.67	Peak	133	341	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 3, CH102		:

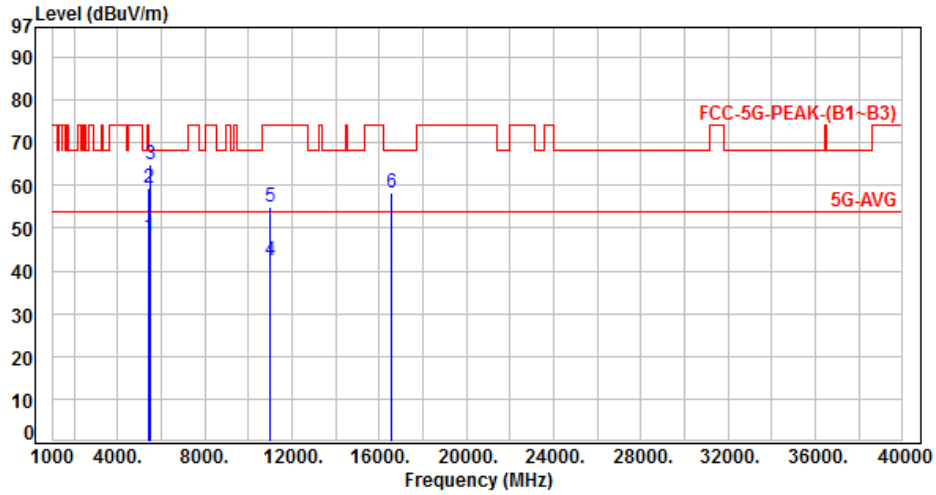


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	42.71	47.91	54.00	-6.09	Average	213	176	P
2	5460.00	5.20	54.02	59.22	74.00	-14.78	Peak	213	176	P
3	5470.00	5.20	59.72	64.92	68.20	-3.28	Peak	213	176	P
4	11020.00	12.44	29.98	42.42	54.00	-11.58	Average	118	38	P
5	11020.00	12.44	42.69	55.13	74.00	-18.87	Peak	118	38	P
6	16530.00	14.68	43.73	58.41	68.20	-9.79	Peak	109	56	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 3, CH118		:

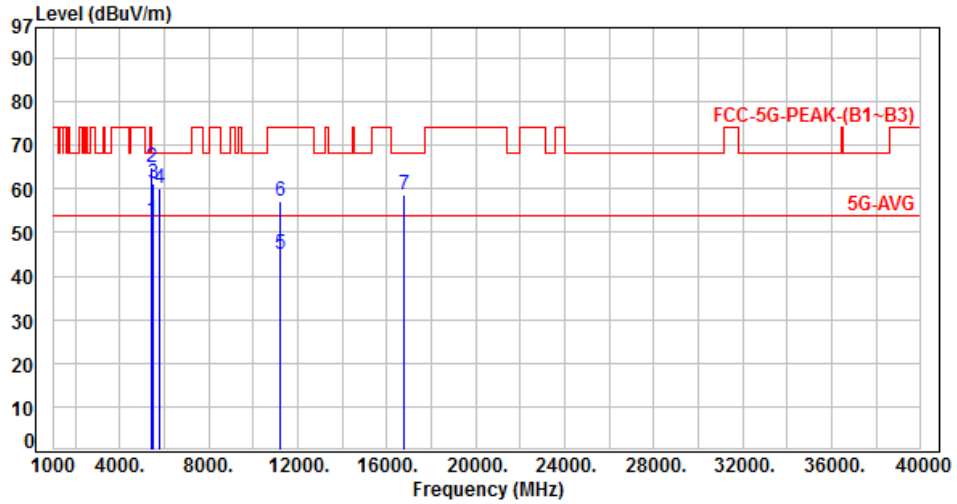


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	5.16	47.74	52.90	54.00	-1.10	Average	246	298	P
2	5440.00	5.16	59.81	64.97	74.00	-9.03	Peak	246	298	P
3	5470.00	5.20	56.05	61.25	68.20	-6.95	Peak	246	298	P
4	5760.00	5.16	54.82	59.98	68.20	-8.22	Peak	100	97	P
5	11180.00	12.69	32.46	45.15	54.00	-8.85	Average	314	301	P
6	11180.00	12.69	44.52	57.21	74.00	-16.79	Peak	314	301	P
7	16770.00	16.27	42.46	58.73	68.20	-9.47	Peak	100	325	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 3, CH118		:

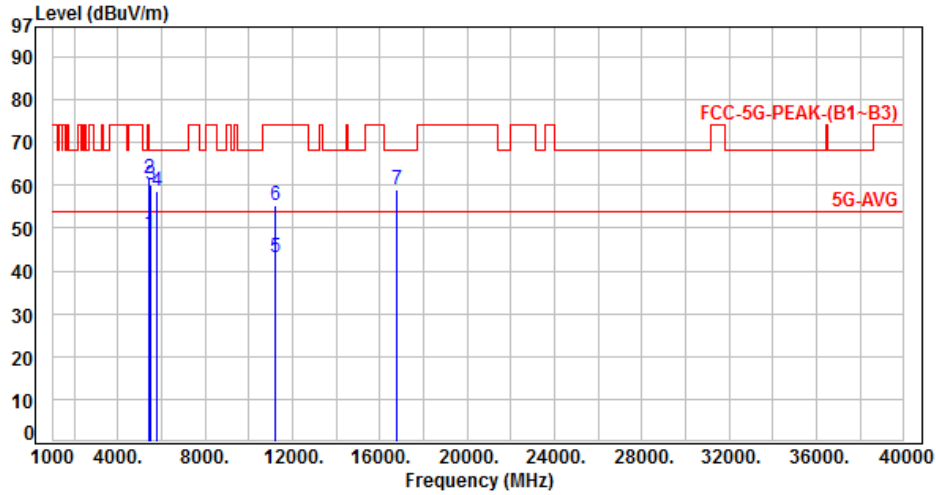


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5440.00	5.16	43.54	48.70	54.00	-5.30	Average	100	68	P
2	5440.00	5.16	56.33	61.49	74.00	-12.51	Peak	100	68	P
3	5470.00	5.20	55.06	60.26	68.20	-7.94	Peak	100	68	P
4	5760.00	5.16	53.47	58.63	68.20	-9.57	Peak	100	328	P
5	11180.00	12.69	30.52	43.21	54.00	-10.79	Average	215	54	P
6	11180.00	12.69	42.65	55.34	74.00	-18.66	Peak	215	54	P
7	16770.00	16.27	42.70	58.97	68.20	-9.23	Peak	100	62	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 3, CH134		:

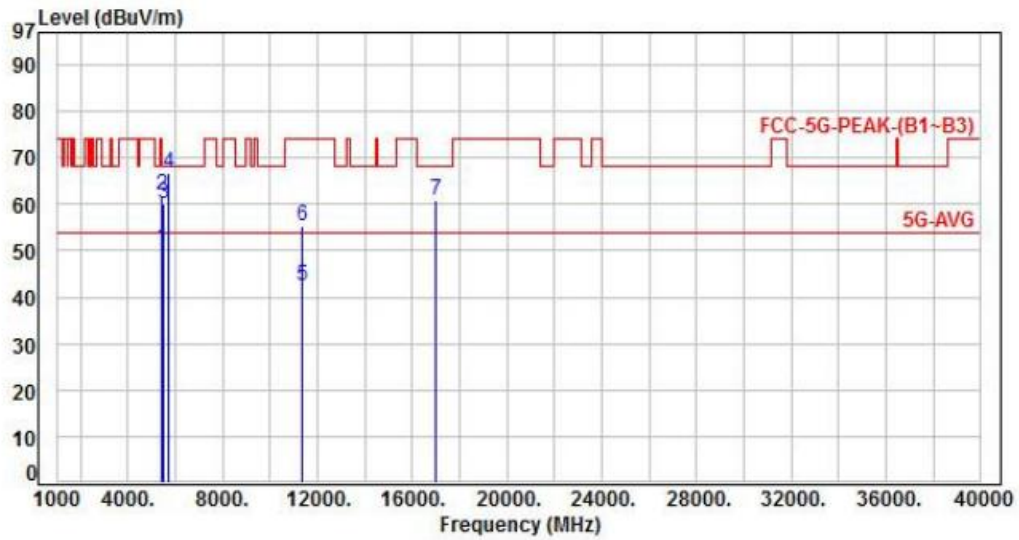


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5439.00	5.16	45.54	50.70	54.00	-3.30	Average	248	301	P
2	5439.00	5.16	56.95	62.11	74.00	-11.89	Peak	248	301	P
3	5470.00	5.20	54.79	59.99	68.20	-8.21	Peak	248	301	P
4	5725.00	5.14	61.67	66.81	68.20	-1.39	Peak	128	355	P
5	11340.00	12.85	29.39	42.24	54.00	-11.76	Average	151	299	P
6	11340.00	12.85	42.36	55.21	74.00	-18.79	Peak	151	299	P
7	17010.00	17.72	42.98	60.70	68.20	-7.50	Peak	177	249	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 3, CH134		:

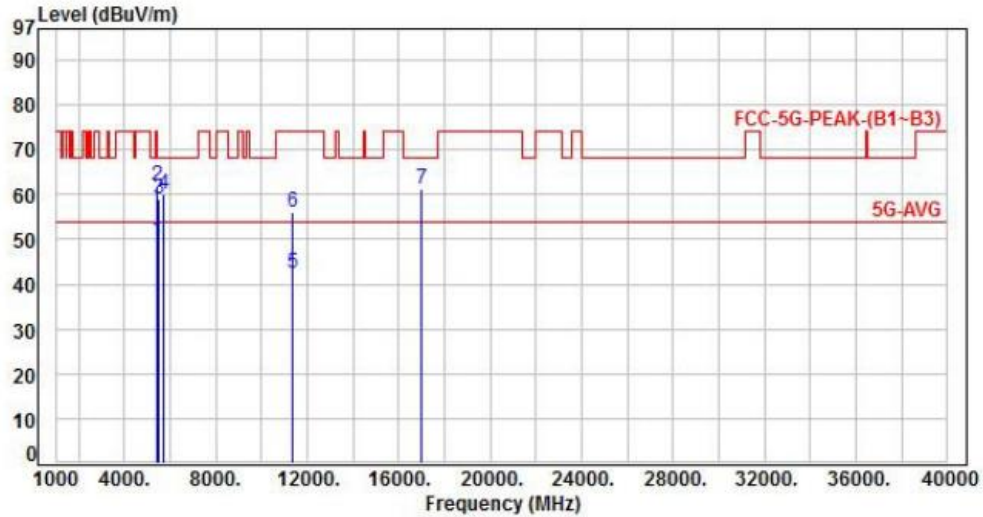


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5439.00	5.16	44.65	49.81	54.00	-4.19	Average	354	72	P
2	5439.00	5.16	56.74	61.90	74.00	-12.10	Peak	354	72	P
3	5470.00	5.20	53.97	59.17	68.20	-9.03	Peak	354	72	P
4	5725.00	5.14	55.05	60.19	68.20	-8.01	Peak	128	51	P
5	11340.00	12.85	29.52	42.37	54.00	-11.63	Average	116	61	P
6	11340.00	12.85	43.03	55.88	74.00	-18.12	Peak	116	61	P
7	17010.00	17.72	43.56	61.28	68.20	-6.92	Peak	102	96	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 15, Band 3, CH106		:

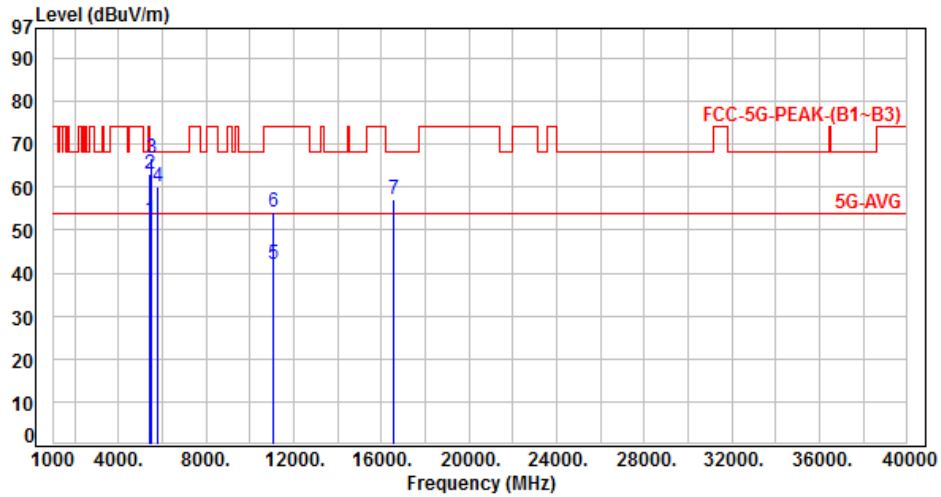


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	47.12	52.32	54.00	-1.68	Average	192	295	P
2	5460.00	5.20	57.75	62.95	74.00	-11.05	Peak	192	295	P
3	5470.00	5.20	61.51	66.71	68.20	-1.49	Peak	192	295	P
4	5759.00	5.16	54.94	60.10	68.20	-8.10	Peak	100	103	P
5	11060.00	12.51	29.43	41.94	54.00	-12.06	Average	288	296	P
6	11060.00	12.51	41.67	54.18	74.00	-19.82	Peak	288	296	P
7	16590.00	15.16	42.07	57.23	68.20	-10.97	Peak	169	245	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 15, Band 3, CH106		:

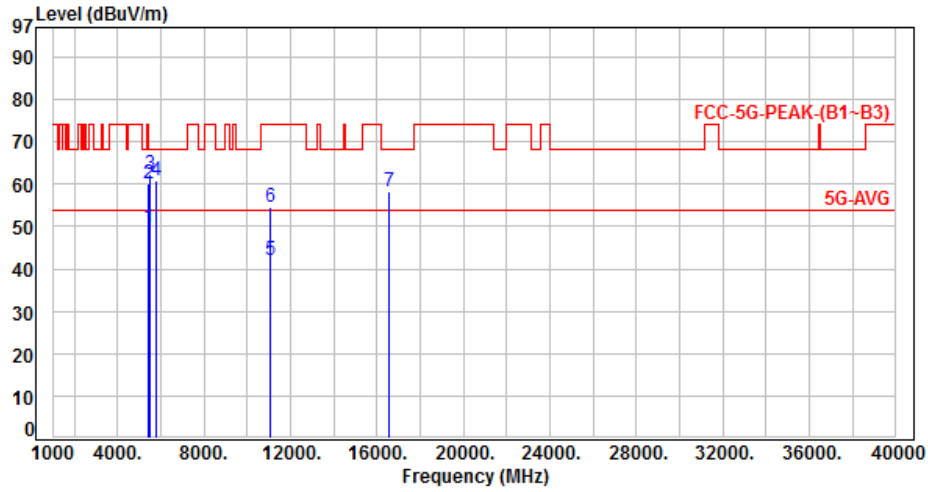


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	44.66	49.86	54.00	-4.14	Average	100	134	P
2	5460.00	5.20	54.93	60.13	74.00	-13.87	Peak	100	134	P
3	5470.00	5.20	57.29	62.49	68.20	-5.71	Peak	100	134	P
4	5759.00	5.16	55.61	60.77	68.20	-7.43	Peak	172	56	P
5	11060.00	12.51	29.65	42.16	54.00	-11.84	Average	115	76	P
6	11060.00	12.51	42.24	54.75	74.00	-19.25	Peak	115	76	P
7	16590.00	15.16	43.12	58.28	68.20	-9.92	Peak	118	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 15, Band 3, CH122		:

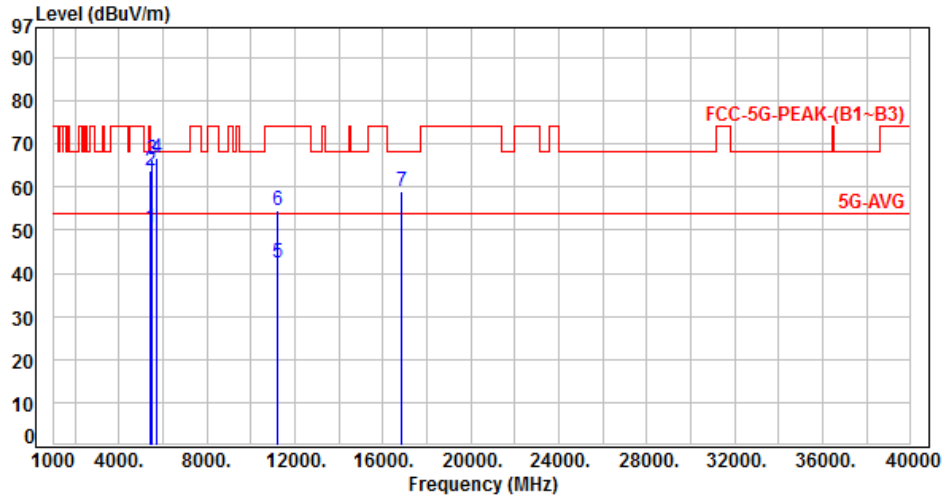


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	45.24	50.44	54.00	-3.56	Average	207	293	P
2	5460.00	5.20	58.43	63.63	74.00	-10.37	Peak	207	293	P
3	5470.00	5.20	61.12	66.32	68.20	-1.88	Peak	207	293	P
4	5725.00	5.14	61.64	66.78	68.20	-1.42	Peak	101	288	P
5	11220.00	12.74	29.58	42.32	54.00	-11.68	Average	279	302	P
6	11220.00	12.74	41.85	54.59	74.00	-19.41	Peak	279	302	P
7	16830.00	16.75	42.28	59.03	68.20	-9.17	Peak	162	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 15, Band 3, CH122		:

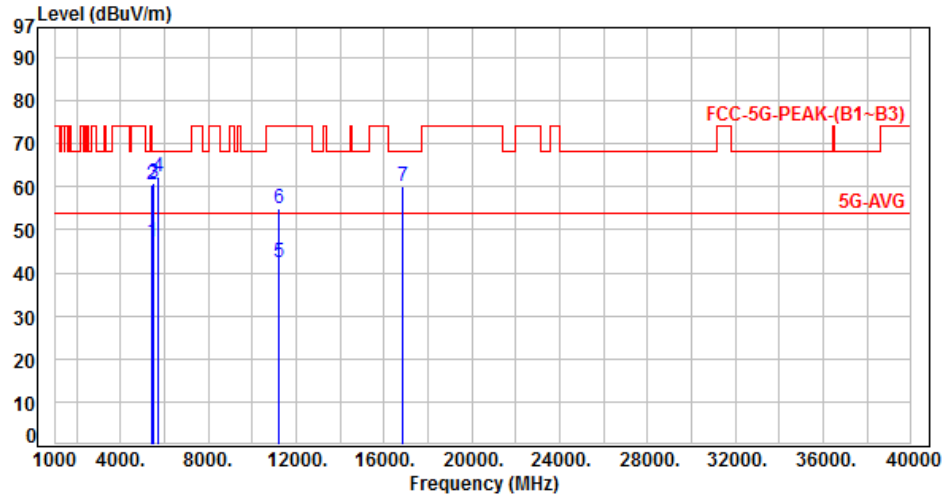


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	42.08	47.28	54.00	-6.72	Average	100	45	P
2	5460.00	5.20	55.27	60.47	74.00	-13.53	Peak	100	45	P
3	5470.00	5.20	55.59	60.79	68.20	-7.41	Peak	100	45	P
4	5725.00	5.14	57.04	62.18	68.20	-6.02	Peak	113	43	P
5	11220.00	12.74	29.83	42.57	54.00	-11.43	Average	129	68	P
6	11220.00	12.74	42.37	55.11	74.00	-18.89	Peak	129	68	P
7	16830.00	16.75	43.31	60.06	68.20	-8.14	Peak	112	73	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 3, CH100		:

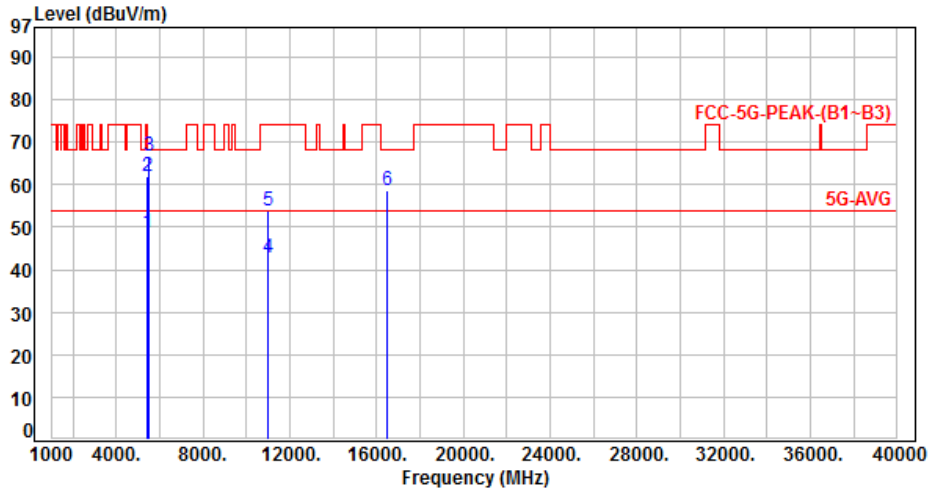


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5425.00	5.12	43.62	48.74	54.00	-5.26	Average	231	304	P
2	5425.00	5.12	56.86	61.98	74.00	-12.02	Peak	231	304	P
3	5470.00	5.20	61.73	66.93	68.20	-1.27	Peak	193	294	P
4	11000.00	12.41	30.54	42.95	54.00	-11.05	Average	153	102	P
5	11000.00	12.41	41.52	53.93	74.00	-20.07	Peak	153	102	P
6	16500.00	14.43	44.27	58.70	68.20	-9.50	Peak	153	93	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 3, CH100		:

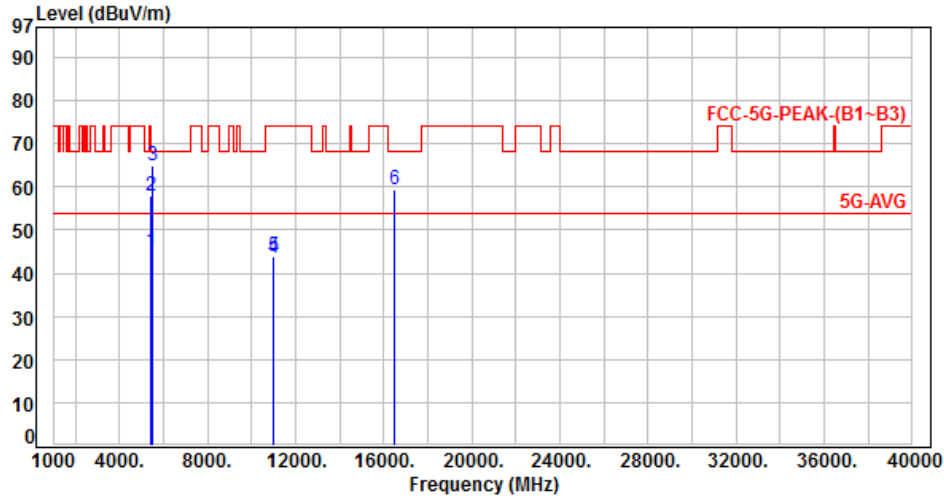


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5425.00	5.12	39.98	45.10	54.00	-8.90	Average	100	41	P
2	5425.00	5.12	52.87	57.99	74.00	-16.01	Peak	100	41	P
3	5470.00	5.20	59.75	64.95	68.20	-3.25	Peak	100	41	P
4	11000.00	12.41	31.21	43.62	54.00	-10.38	Average	136	72	P
5	11000.00	12.41	31.40	43.81	74.00	-30.19	Peak	136	72	P
6	16500.00	14.43	44.86	59.29	68.20	-8.91	Peak	100	84	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 3, CH120		

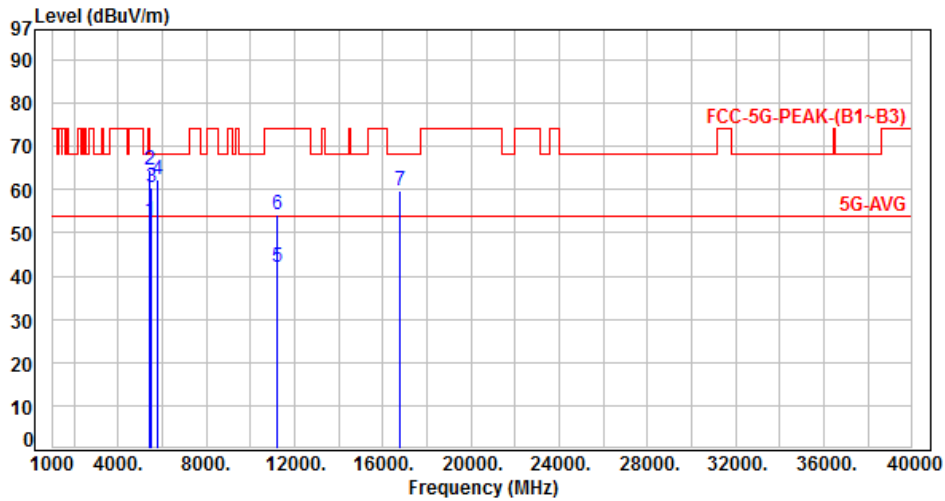


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5432.00	5.13	47.60	52.73	54.00	-1.27	Average	210	314	P
2	5432.00	5.13	59.33	64.46	74.00	-9.54	Peak	210	314	P
3	5470.00	5.20	55.26	60.46	68.20	-7.74	Peak	210	314	P
4	5765.00	5.16	57.27	62.43	68.20	-5.77	Peak	221	325	P
5	11200.00	12.72	29.37	42.09	54.00	-11.91	Average	320	277	P
6	11200.00	12.72	41.49	54.21	74.00	-19.79	Peak	320	277	P
7	16800.00	16.56	43.28	59.84	68.20	-8.36	Peak	112	214	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 3, CH120		

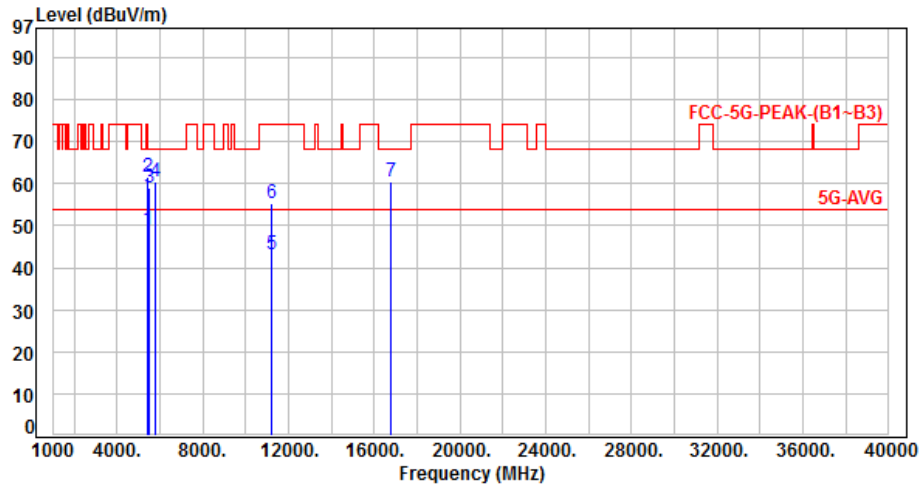


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5432.00	5.13	43.82	48.95	54.00	-5.05	Average	142	276	P
2	5432.00	5.13	56.50	61.63	74.00	-12.37	Peak	142	276	P
3	5470.00	5.20	53.68	58.88	68.20	-9.32	Peak	142	276	P
4	5765.00	5.16	55.18	60.34	68.20	-7.86	Peak	126	53	P
5	11200.00	12.72	30.30	43.02	54.00	-10.98	Average	109	59	P
6	11200.00	12.72	42.53	55.25	74.00	-18.75	Peak	109	59	P
7	16800.00	16.56	43.75	60.31	68.20	-7.89	Peak	119	45	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 3, CH140		:

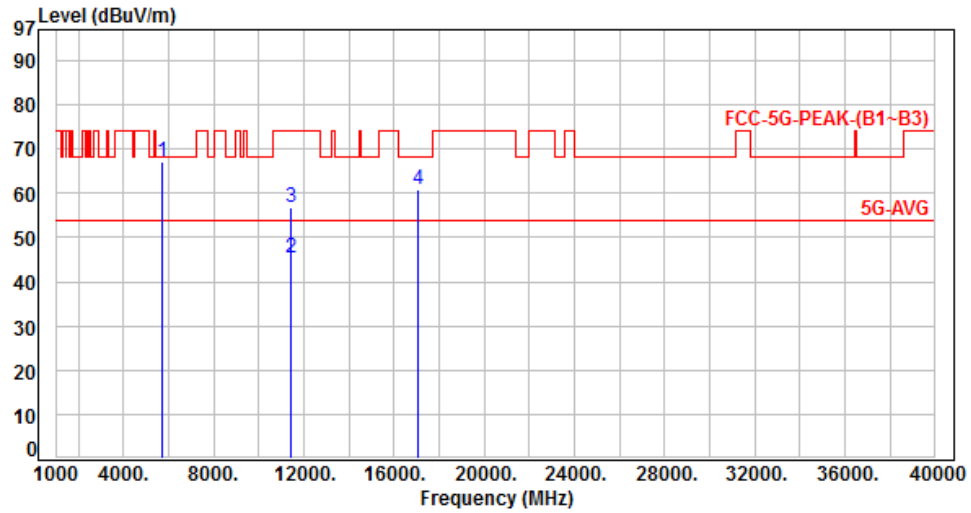


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	5.14	61.82	66.96	68.20	-1.24	Peak	200	351	P
2	11400.00	12.94	32.52	45.46	54.00	-8.54	Average	230	319	P
3	11400.00	12.94	43.68	56.62	74.00	-17.38	Peak	230	319	P
4	17100.00	18.03	42.66	60.69	68.20	-7.51	Peak	100	343	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 3, CH140		:

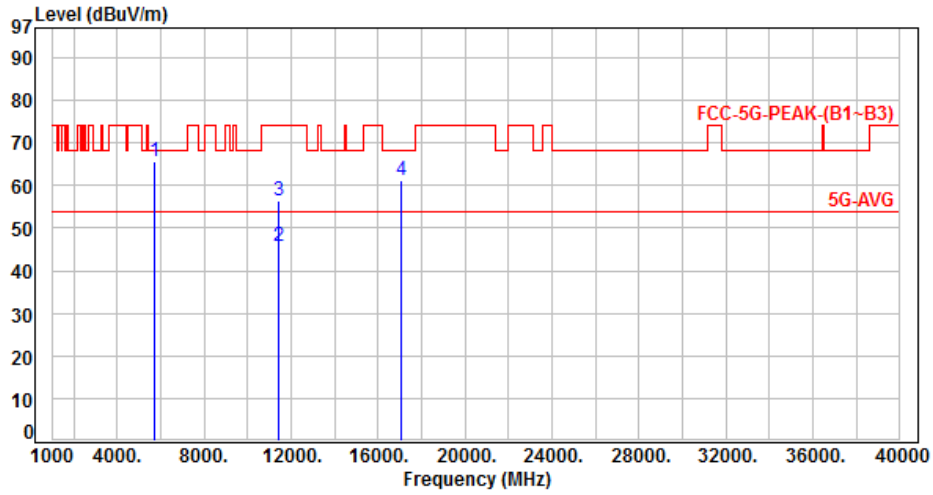


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5725.00	5.14	60.62	65.76	68.20	-2.44	Peak	142	40	P
2	11400.00	12.94	32.67	45.61	54.00	-8.39	Average	155	64	P
3	11400.00	12.94	43.65	56.59	74.00	-17.41	Peak	155	64	P
4	17100.00	18.03	43.12	61.15	68.20	-7.05	Peak	100	72	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 3, CH102		:

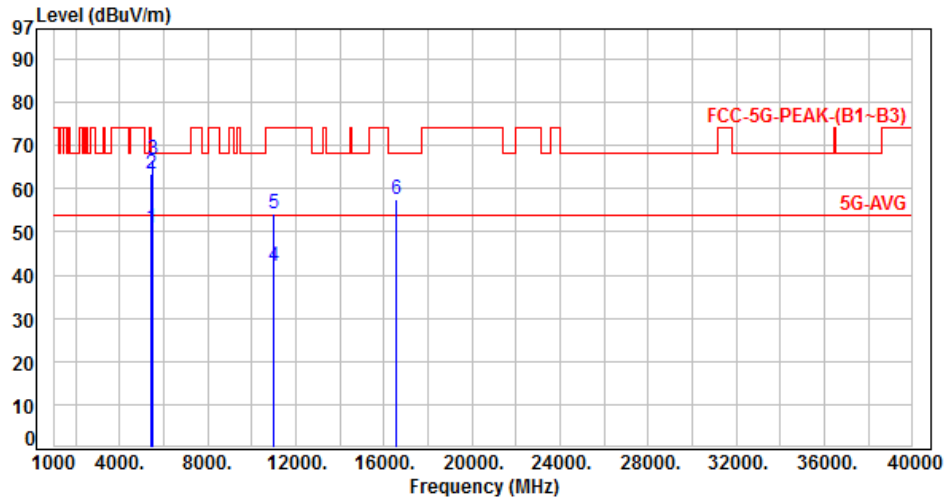


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	45.72	50.92	54.00	-3.08	Average	188	297	P
2	5460.00	5.20	58.26	63.46	74.00	-10.54	Peak	188	297	P
3	5470.00	5.20	61.72	66.92	68.20	-1.28	Peak	188	297	P
4	11020.00	12.44	29.55	41.99	54.00	-12.01	Average	300	277	P
5	11020.00	12.44	41.96	54.40	74.00	-19.60	Peak	300	277	P
6	16530.00	14.68	42.70	57.38	68.20	-10.82	Peak	172	286	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 3, CH102		:

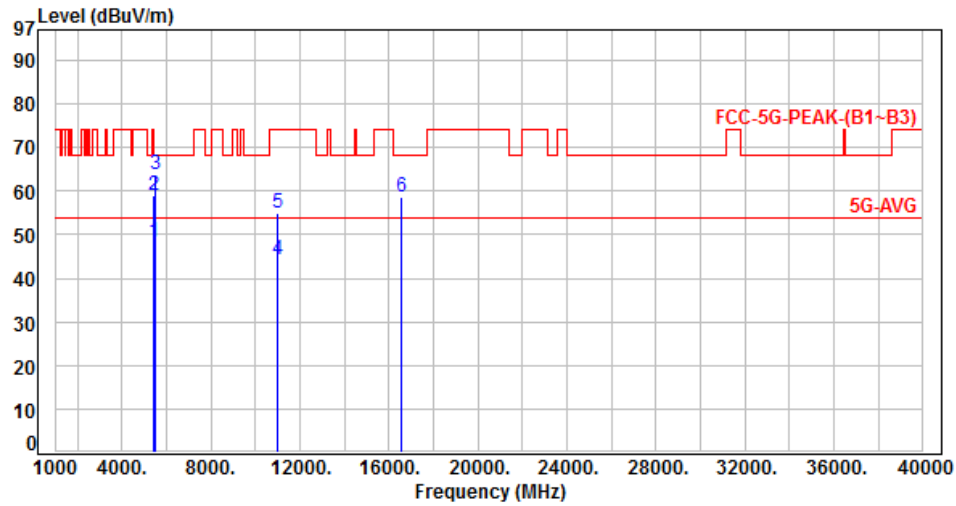


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	42.93	48.13	54.00	-5.87	Average	100	41	P
2	5460.00	5.20	53.86	59.06	74.00	-14.94	Peak	100	41	P
3	5470.00	5.20	58.45	63.65	68.20	-4.55	Peak	100	41	P
4	11020.00	12.44	31.68	44.12	54.00	-9.88	Average	109	75	P
5	11020.00	12.44	42.66	55.10	74.00	-18.90	Peak	109	75	P
6	16530.00	14.68	43.87	58.55	68.20	-9.65	Peak	115	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 3, CH118		:

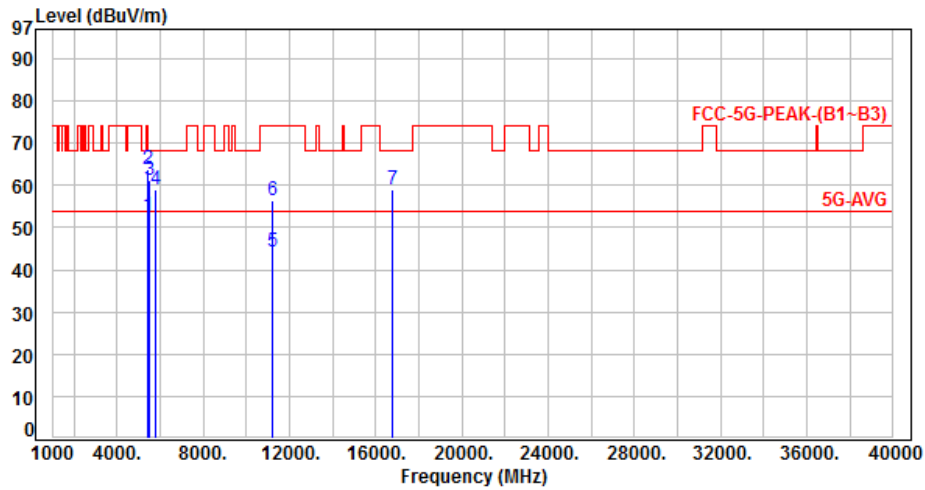


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5423.00	5.12	47.73	52.85	54.00	-1.15	Average	179	327	P
2	5423.00	5.12	58.62	63.74	74.00	-10.26	Peak	179	327	P
3	5470.00	5.20	56.02	61.22	68.20	-6.98	Peak	179	327	P
4	5760.00	5.16	53.94	59.10	68.20	-9.10	Peak	216	104	P
5	11180.00	12.69	31.64	44.33	54.00	-9.67	Average	316	303	P
6	11180.00	12.69	43.72	56.41	74.00	-17.59	Peak	316	303	P
7	16770.00	16.27	42.60	58.87	68.20	-9.33	Peak	100	319	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 3, CH118		:

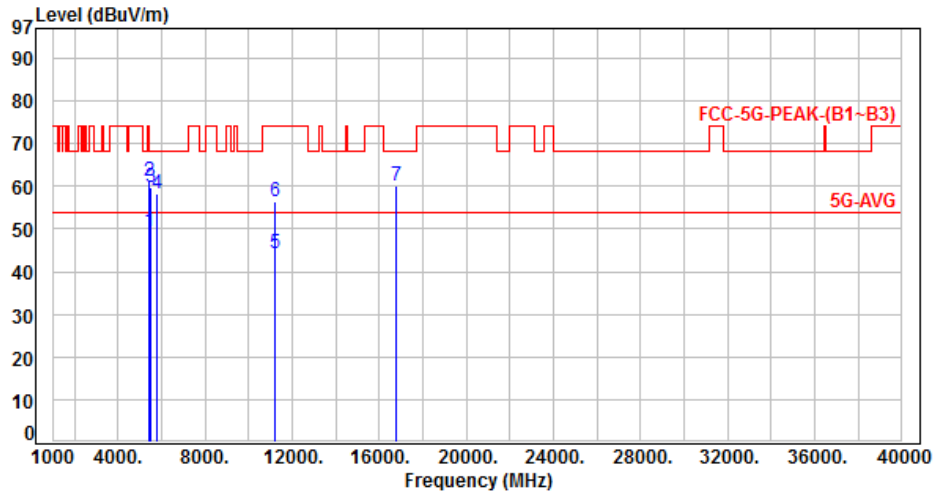

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5423.00	5.12	44.21	49.33	54.00	-4.67	Average	172	72	P
2	5423.00	5.12	56.05	61.17	74.00	-12.83	Peak	172	72	P
3	5470.00	5.20	54.70	59.90	68.20	-8.30	Peak	172	72	P
4	5760.00	5.16	53.23	58.39	68.20	-9.81	Peak	100	330	P
5	11180.00	12.69	31.67	44.36	54.00	-9.64	Average	213	72	P
6	11180.00	12.69	43.83	56.52	74.00	-17.48	Peak	213	72	P
7	16770.00	16.27	43.90	60.17	68.20	-8.03	Peak	100	75	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor