




Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 3, CH134		:

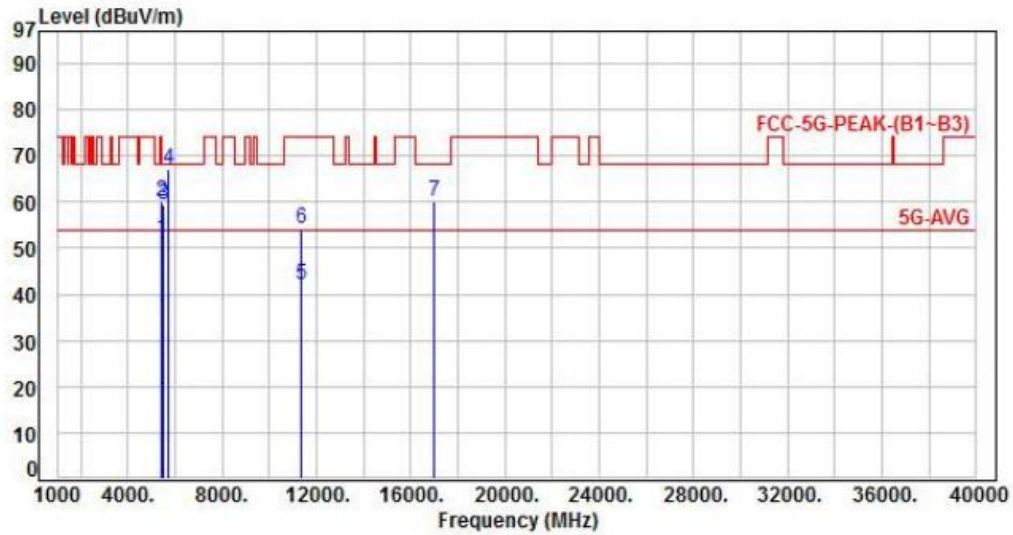


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5439.00	5.16	46.93	52.09	54.00	-1.91	Average	224	127	P
2	5439.00	5.16	54.96	60.12	74.00	-13.88	Peak	224	127	P
3	5470.00	5.20	54.32	59.52	68.20	-8.68	Peak	224	127	P
4	5725.00	5.14	61.88	67.02	68.20	-1.18	Peak	206	353	P
5	11340.00	12.85	29.21	42.06	54.00	-11.94	Average	177	285	P
6	11340.00	12.85	41.53	54.38	74.00	-19.62	Peak	177	285	P
7	17010.00	17.72	42.53	60.25	68.20	-7.95	Peak	129	252	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 3, CH134		:

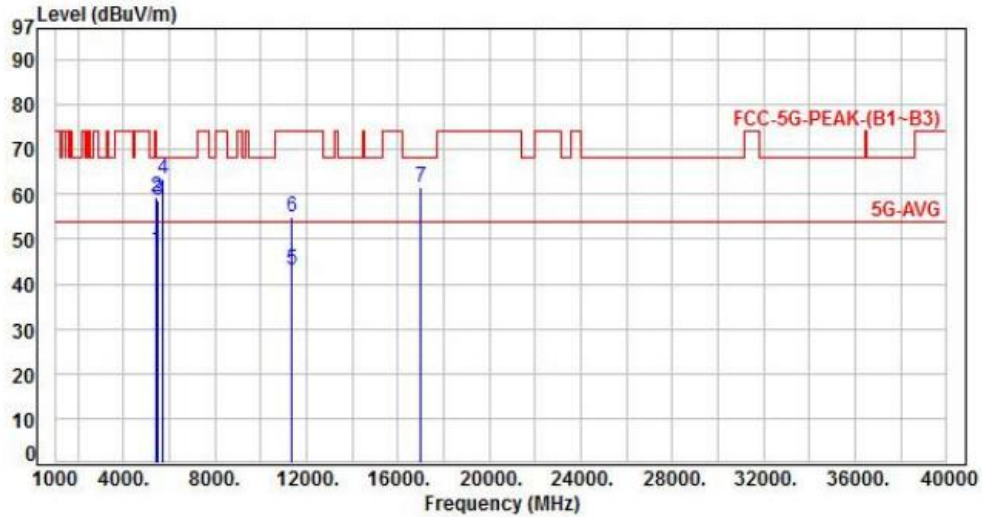


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5439.00	5.16	42.31	47.47	54.00	-6.53	Average	119	29	P
2	5439.00	5.16	54.13	59.29	74.00	-14.71	Peak	119	29	P
3	5470.00	5.20	53.49	58.69	68.20	-9.51	Peak	119	29	P
4	5725.00	5.14	58.29	63.43	68.20	-4.77	Peak	119	29	P
5	11340.00	12.85	30.21	43.06	54.00	-10.94	Average	122	51	P
6	11340.00	12.85	42.12	54.97	74.00	-19.03	Peak	122	51	P
7	17010.00	17.72	43.75	61.47	68.20	-6.73	Peak	111	67	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, Band 3, CH106		:

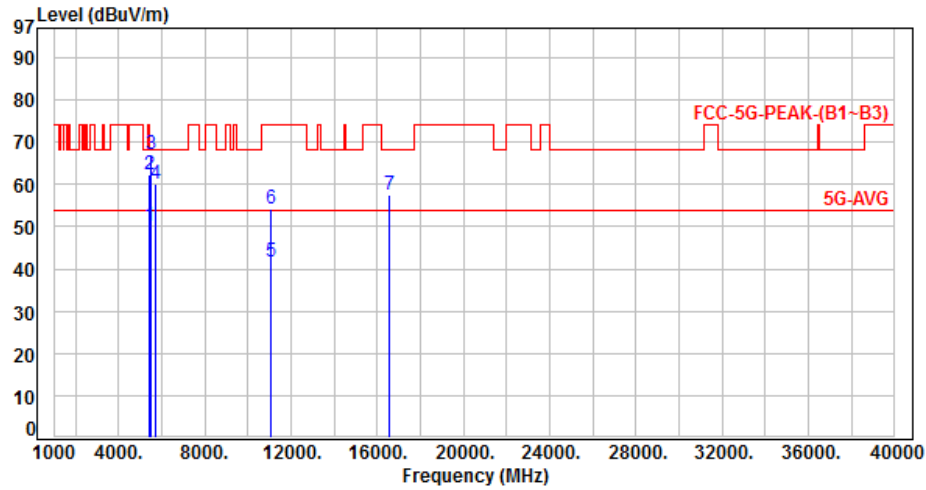


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	45.04	50.24	54.00	-3.76	Average	174	357	P
2	5460.00	5.20	57.16	62.36	74.00	-11.64	Peak	174	357	P
3	5470.00	5.20	62.03	67.23	68.20	-0.97	Peak	174	357	P
4	5725.00	5.14	54.96	60.10	68.20	-8.10	Peak	174	357	P
5	11060.00	12.51	29.32	41.83	54.00	-12.17	Average	302	296	P
6	11060.00	12.51	41.68	54.19	74.00	-19.81	Peak	302	296	P
7	16590.00	15.16	42.36	57.52	68.20	-10.68	Peak	126	319	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, Band 3, CH106		:

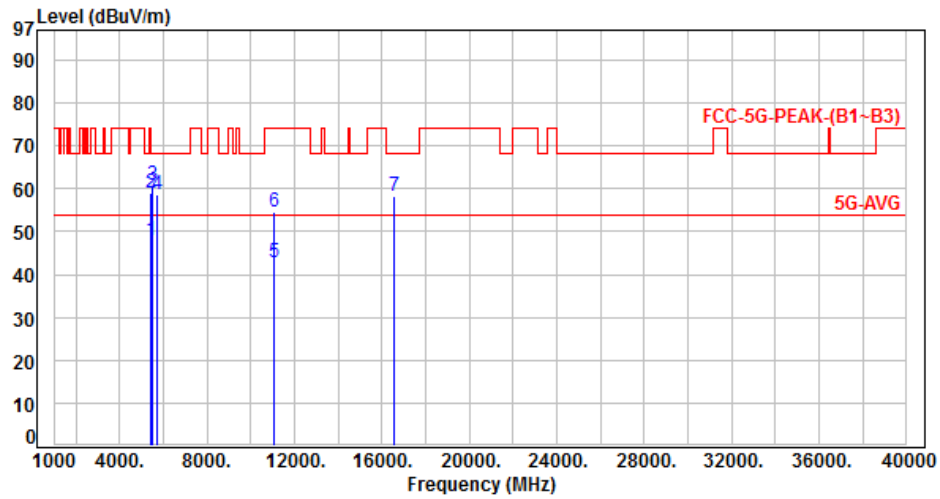


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	42.92	48.12	54.00	-5.88	Average	122	70	P
2	5460.00	5.20	53.95	59.15	74.00	-14.85	Peak	122	70	P
3	5470.00	5.20	55.81	61.01	68.20	-7.19	Peak	122	70	P
4	5725.00	5.14	53.49	58.63	68.20	-9.57	Peak	122	70	P
5	11060.00	12.51	30.33	42.84	54.00	-11.16	Average	124	52	P
6	11060.00	12.51	42.17	54.68	74.00	-19.32	Peak	124	52	P
7	16590.00	15.16	42.95	58.11	68.20	-10.09	Peak	117	62	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, Band 3, CH122		:

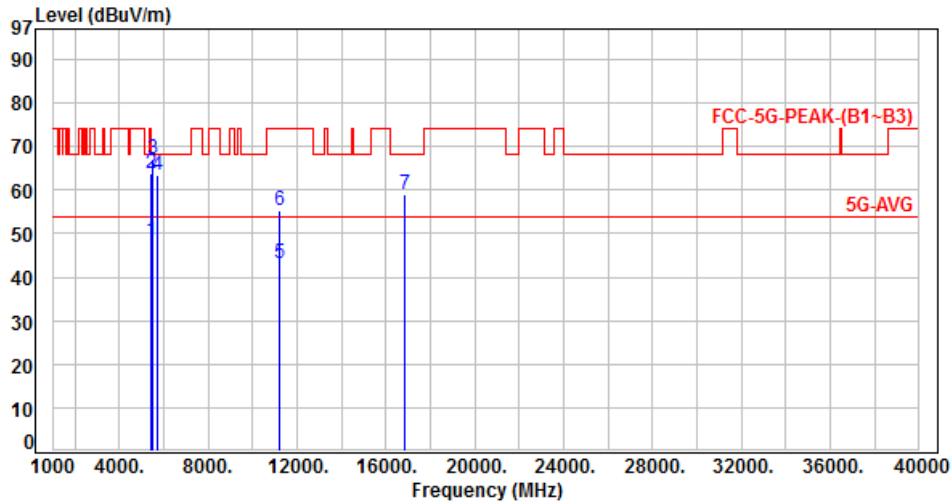


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	43.26	48.46	54.00	-5.54	Average	254	306	P
2	5460.00	5.20	58.53	63.73	74.00	-10.27	Peak	254	306	P
3	5470.00	5.20	61.92	67.12	68.20	-1.08	Peak	254	306	P
4	5725.00	5.14	58.48	63.62	68.20	-4.58	Peak	131	290	P
5	11220.00	12.74	30.52	43.26	54.00	-10.74	Average	298	306	P
6	11220.00	12.74	42.59	55.33	74.00	-18.67	Peak	298	306	P
7	16830.00	16.75	42.21	58.96	68.20	-9.24	Peak	100	316	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, Band 3, CH122		:

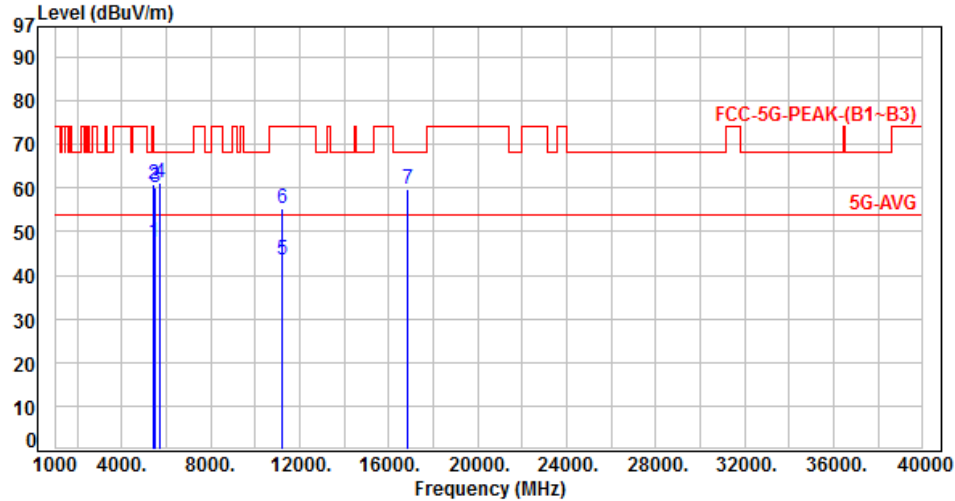


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	42.33	47.53	54.00	-6.47	Average	154	50	P
2	5460.00	5.20	55.82	61.02	74.00	-12.98	Peak	154	50	P
3	5470.00	5.20	54.88	60.08	68.20	-8.12	Peak	154	50	P
4	5725.00	5.14	55.98	61.12	68.20	-7.08	Peak	154	50	P
5	11220.00	12.74	30.86	43.60	54.00	-10.40	Average	100	7	P
6	11220.00	12.74	42.62	55.36	74.00	-18.64	Peak	100	7	P
7	16830.00	16.75	43.01	59.76	68.20	-8.44	Peak	100	75	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 4, CH149		:

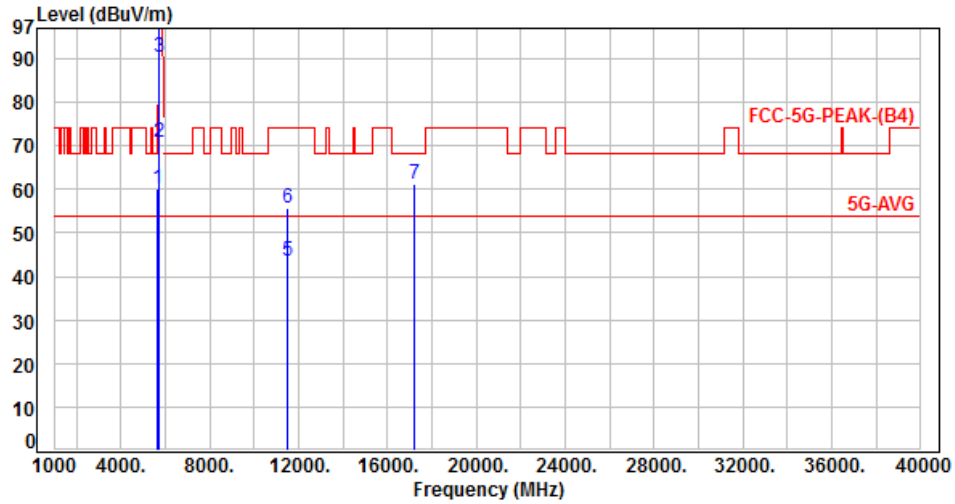


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	55.00	60.09	68.20	-8.11	Peak	196	336	P
2	5700.00	5.12	65.57	70.69	105.20	-34.51	Peak	196	336	P
3	5720.00	5.13	85.36	90.49	110.80	-20.31	Peak	196	336	P
4	5725.00	5.14	92.48	97.62	122.20	-24.58	Peak	196	336	P
5	11490.00	13.27	30.43	43.70	54.00	-10.30	Average	384	260	P
6	11490.00	13.27	42.50	55.77	74.00	-18.23	Peak	384	260	P
7	17235.00	18.83	42.41	61.24	68.20	-6.96	Peak	100	349	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 4, CH149		:

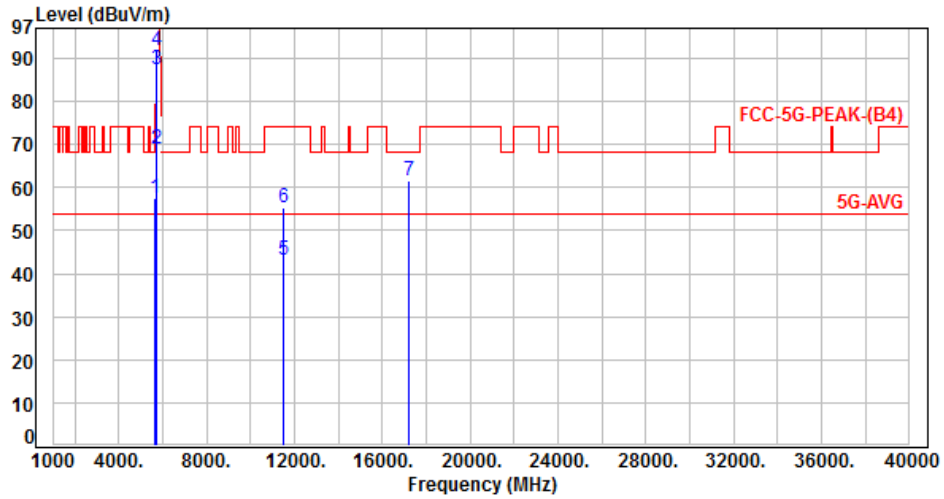


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	52.47	57.56	68.20	-10.64	Peak	122	36	P
2	5700.00	5.12	63.74	68.86	105.20	-36.34	Peak	122	36	P
3	5720.00	5.13	82.21	87.34	110.80	-23.46	Peak	122	36	P
4	5725.00	5.14	86.63	91.77	122.20	-30.43	Peak	122	36	P
5	11490.00	13.27	29.75	43.02	54.00	-10.98	Average	100	5	P
6	11490.00	13.27	41.99	55.26	74.00	-18.74	Peak	100	5	P
7	17235.00	18.83	42.69	61.52	68.20	-6.68	Peak	100	56	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 4, CH157		:

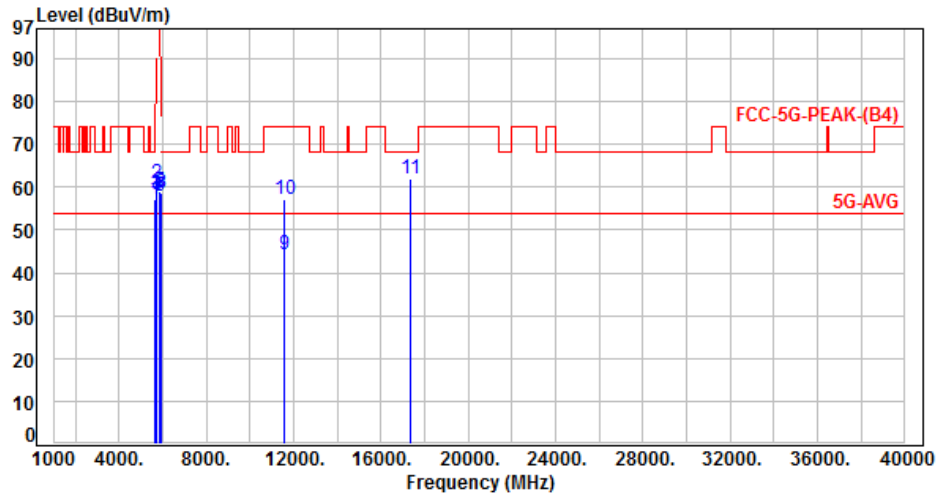


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	52.23	57.32	68.20	-10.88	Peak	199	332	P
2	5700.00	5.12	55.74	60.86	105.20	-44.34	Peak	199	332	P
3	5720.00	5.13	53.12	58.25	110.80	-52.55	Peak	199	332	P
4	5725.00	5.14	52.84	57.98	122.20	-64.22	Peak	119	332	P
5	5850.00	5.21	53.62	58.83	122.20	-63.37	Peak	119	332	P
6	5855.00	5.23	52.64	57.87	110.80	-52.93	Peak	119	332	P
7	5875.00	5.31	52.47	57.78	105.20	-47.42	Peak	119	332	P
8	5925.00	5.49	53.29	58.78	68.20	-9.42	Peak	199	332	P
9	11570.00	13.50	30.69	44.19	54.00	-9.81	Average	359	269	P
10	11570.00	13.50	43.63	57.13	74.00	-16.87	Peak	359	269	P
11	17355.00	19.47	42.39	61.86	68.20	-6.34	Peak	100	346	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13 Band 4, CH157		:

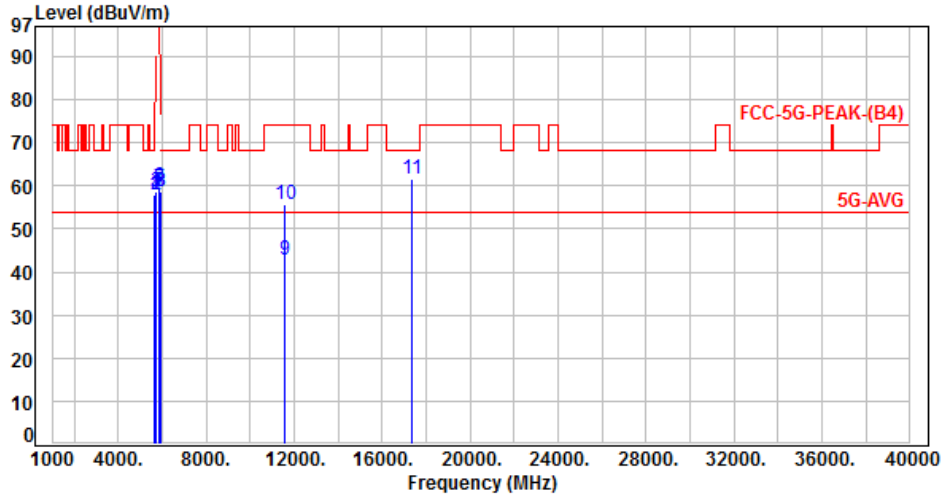


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	52.93	58.02	68.20	-10.18	Peak	115	30	P
2	5700.00	5.12	52.74	57.86	105.20	-47.34	Peak	115	30	P
3	5720.00	5.13	53.40	58.53	110.80	-52.27	Peak	115	30	P
4	5725.00	5.14	52.95	58.09	122.20	-64.11	Peak	115	30	P
5	5850.00	5.21	53.28	58.49	122.20	-63.71	Peak	115	30	P
6	5855.00	5.23	54.50	59.73	110.80	-51.07	Peak	115	30	P
7	5875.00	5.31	53.96	59.27	105.20	-45.93	Peak	115	30	P
8	5925.00	5.49	53.33	58.82	68.20	-9.38	Peak	115	30	P
9	11570.00	13.50	29.27	42.77	54.00	-11.23	Average	100	16	P
10	11570.00	13.50	42.05	55.55	74.00	-18.45	Peak	100	16	P
11	17355.00	19.47	42.22	61.69	68.20	-6.51	Peak	100	18	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 4, CH165		:

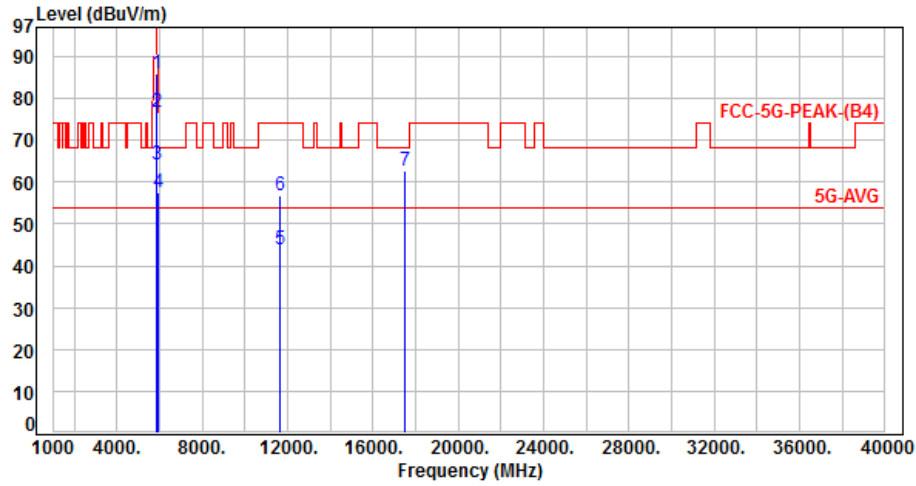


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	80.70	85.91	122.20	-36.29	Peak	219	341	P
2	5855.00	5.23	71.47	76.70	110.80	-34.10	Peak	219	341	P
3	5875.00	5.31	58.88	64.19	105.20	-41.01	Peak	219	341	P
4	5925.00	5.49	52.12	57.61	68.20	-10.59	Peak	219	341	P
5	11650.00	13.68	30.33	44.01	54.00	-9.99	Average	389	277	P
6	11650.00	13.68	43.26	56.94	74.00	-17.06	Peak	389	277	P
7	17475.00	20.39	42.38	62.77	68.20	-5.43	Peak	100	308	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 4, CH165		:

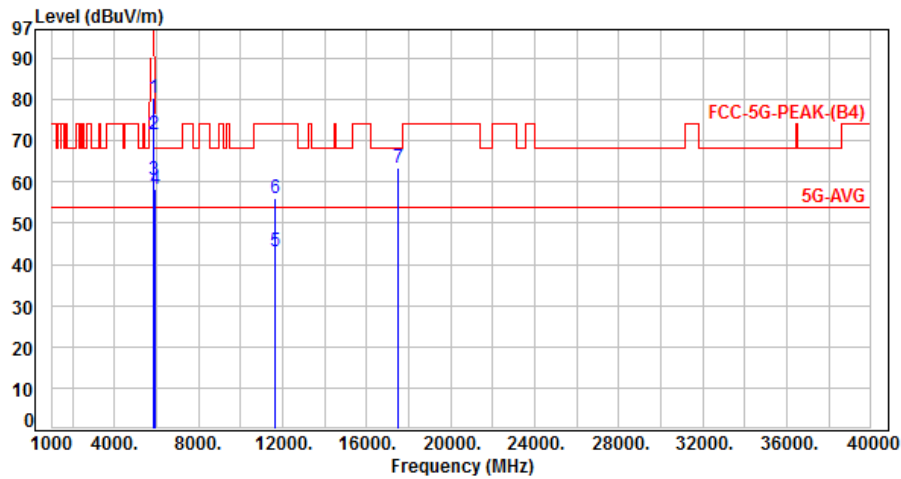


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	75.24	80.45	122.20	-41.75	Peak	108	37	P
2	5855.00	5.23	66.48	71.71	110.80	-39.09	Peak	108	37	P
3	5875.00	5.31	55.27	60.58	105.20	-44.62	Peak	108	37	P
4	5925.00	5.49	52.69	58.18	68.20	-10.02	Peak	108	35	P
5	11650.00	13.68	29.43	43.11	54.00	-10.89	Average	100	19	P
6	11650.00	13.68	42.53	56.21	74.00	-17.79	Peak	100	19	P
7	17475.00	20.39	42.89	63.28	68.20	-4.92	Peak	100	76	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 4, CH151		:

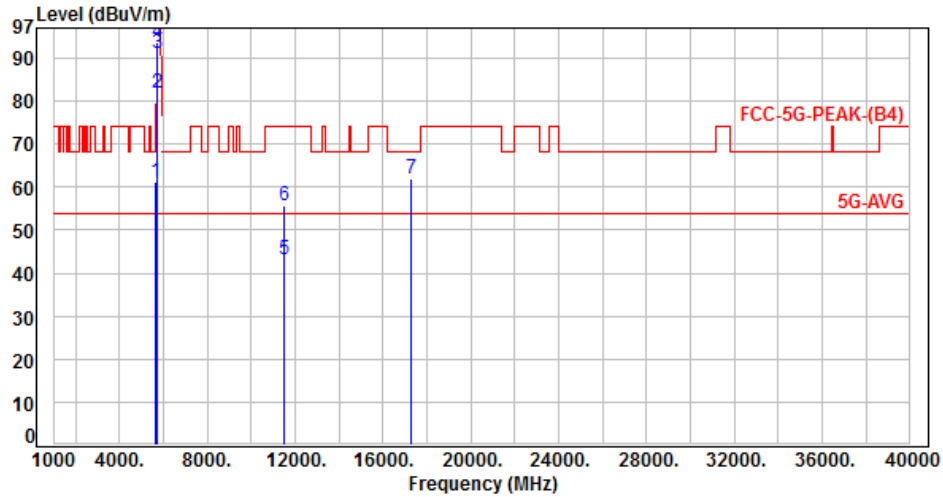


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	56.15	61.24	68.20	-6.96	Peak	113	348	P
2	5700.00	5.12	76.71	81.83	105.20	-23.37	Peak	113	348	P
3	5720.00	5.13	85.97	91.10	110.80	-19.70	Peak	113	348	P
4	5725.00	5.14	88.43	93.57	122.20	-28.63	Peak	113	348	P
5	11510.00	13.32	29.97	43.29	54.00	-10.71	Average	395	274	P
6	11510.00	13.32	42.30	55.62	74.00	-18.38	Peak	395	274	P
7	17265.00	18.96	42.84	61.80	68.20	-6.40	Peak	100	322	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 4, CH151		:

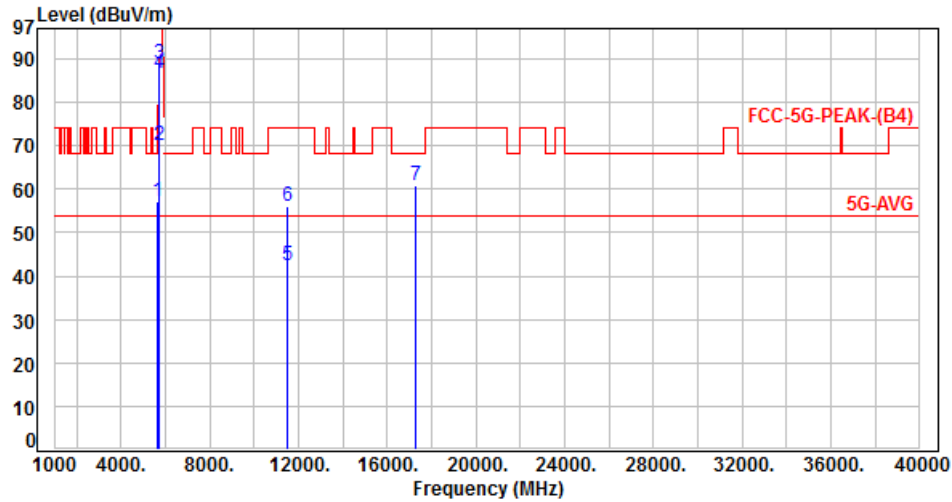


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	52.22	57.31	68.20	-10.89	Peak	231	23	P
2	5700.00	5.12	64.93	70.05	105.20	-35.15	Peak	231	23	P
3	5720.00	5.13	83.71	88.84	110.80	-21.96	Peak	231	23	P
4	5725.00	5.14	81.70	86.84	122.20	-35.36	Peak	231	23	P
5	11510.00	13.32	29.28	42.60	54.00	-11.40	Average	100	10	P
6	11510.00	13.32	42.63	55.95	74.00	-18.05	Peak	100	10	P
7	17265.00	18.96	42.04	61.00	68.20	-7.20	Peak	100	39	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 4, CH159		

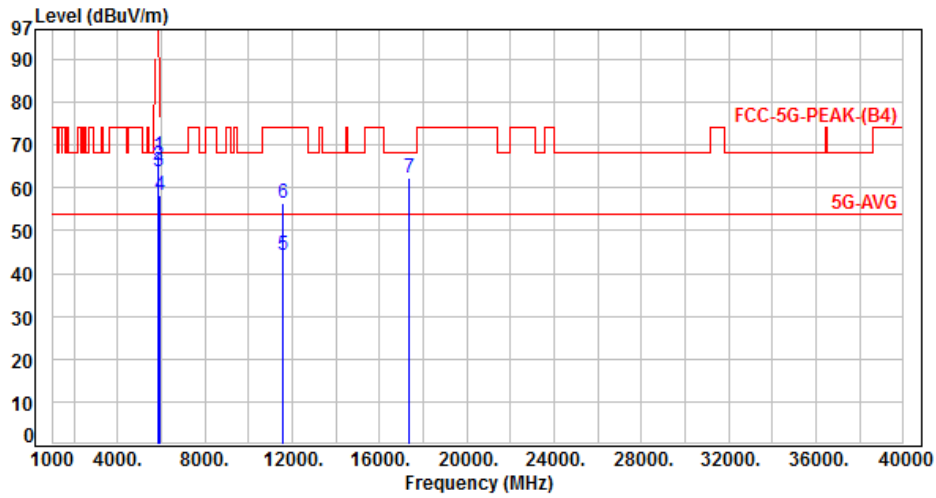


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	62.12	67.33	122.20	-54.87	Peak	218	321	P
2	5855.00	5.23	60.18	65.41	110.80	-45.39	Peak	218	321	P
3	5875.00	5.31	58.47	63.78	105.20	-41.42	Peak	218	321	P
4	5925.00	5.49	52.79	58.28	68.20	-9.92	Peak	218	321	P
5	11590.00	13.55	30.54	44.09	54.00	-9.91	Average	371	236	P
6	11590.00	13.55	42.89	56.44	74.00	-17.56	Peak	371	236	P
7	17385.00	19.66	42.79	62.45	68.20	-5.75	Peak	100	348	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 4, CH159		:

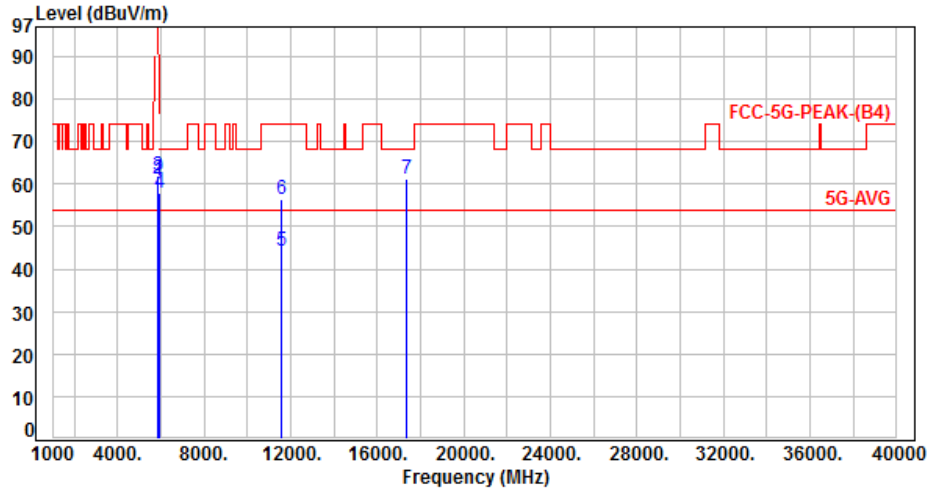


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	55.63	60.84	122.20	-61.36	Peak	137	31	P
2	5855.00	5.23	56.16	61.39	110.80	-49.41	Peak	137	31	P
3	5875.00	5.31	56.84	62.15	105.20	-43.05	Peak	137	31	P
4	5925.00	5.49	52.56	58.05	68.20	-10.15	Peak	137	31	P
5	11590.00	13.55	30.78	44.33	54.00	-9.67	Average	395	299	P
6	11590.00	13.55	42.79	56.34	74.00	-17.66	Peak	395	299	P
7	17385.00	19.66	41.71	61.37	68.20	-6.83	Peak	100	81	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 15, Band 4, CH155		:

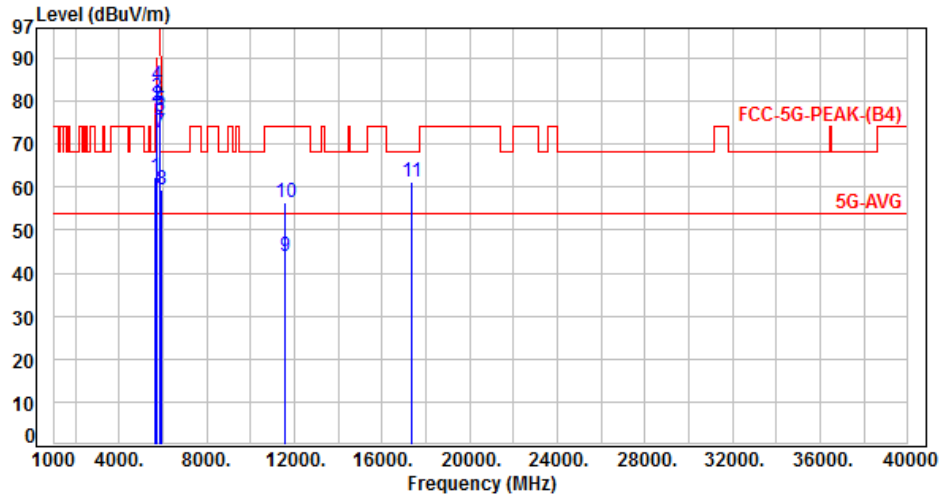


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	57.40	62.49	68.20	-5.71	Peak	212	346	P
2	5700.00	5.12	73.85	78.97	105.20	-26.23	Peak	212	346	P
3	5720.00	5.13	75.54	80.67	110.80	-30.13	Peak	212	346	P
4	5725.00	5.14	78.74	83.88	122.20	-38.32	Peak	212	346	P
5	5850.00	5.21	72.65	77.86	122.20	-44.34	Peak	212	346	P
6	5855.00	5.23	71.08	76.31	110.80	-34.49	Peak	212	346	P
7	5875.00	5.31	67.38	72.69	105.20	-32.51	Peak	212	346	P
8	5925.00	5.49	54.02	59.51	68.20	-8.69	Peak	212	346	P
9	11550.00	13.44	30.57	44.01	54.00	-9.99	Average	319	276	P
10	11550.00	13.44	42.97	56.41	74.00	-17.59	Peak	319	276	P
11	17325.00	19.27	41.92	61.19	68.20	-7.01	Peak	100	317	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 15, Band 4, CH155		:

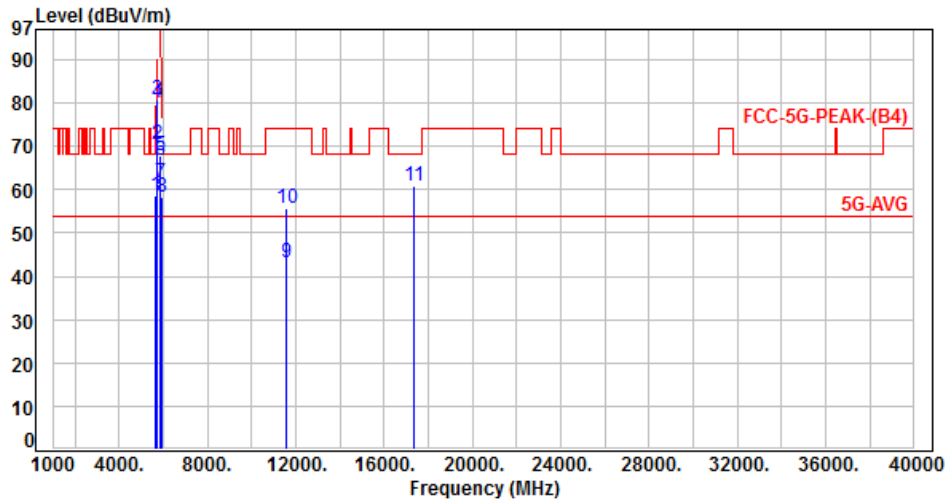


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	53.68	58.77	68.20	-9.43	Peak	177	29	P
2	5700.00	5.12	65.14	70.26	105.20	-34.94	Peak	177	29	P
3	5720.00	5.13	75.58	80.71	110.80	-30.09	Peak	177	29	P
4	5725.00	5.14	74.72	79.86	122.20	-42.34	Peak	177	29	P
5	5850.00	5.21	62.70	67.91	122.20	-54.29	Peak	177	29	P
6	5855.00	5.23	61.36	66.59	110.80	-44.21	Peak	177	29	P
7	5875.00	5.31	56.28	61.59	105.20	-43.61	Peak	177	29	P
8	5925.00	5.49	52.82	58.31	68.20	-9.89	Peak	177	29	P
9	11550.00	13.44	29.70	43.14	54.00	-10.86	Average	100	5	P
10	11550.00	13.44	42.31	55.75	74.00	-18.25	Peak	100	5	P
11	17325.00	19.27	41.57	60.84	68.20	-7.36	Peak	100	41	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 4, CH149		:

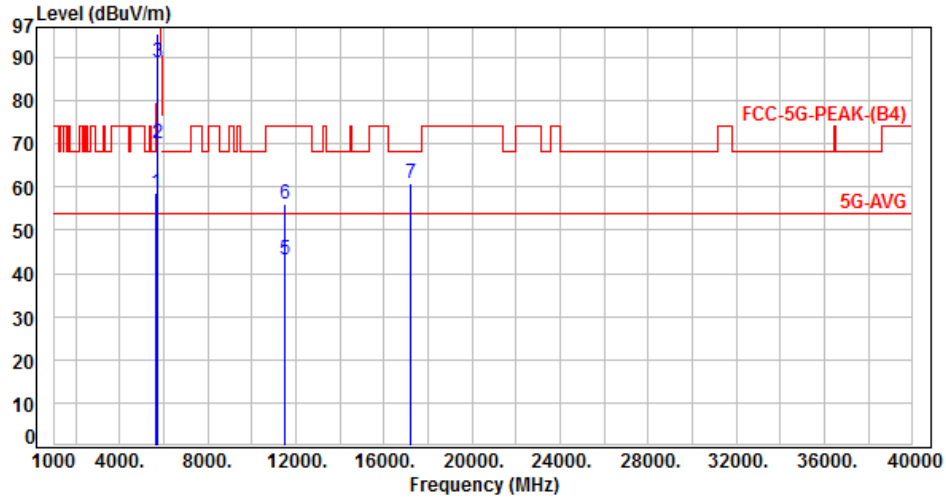


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	53.63	58.72	68.20	-9.48	Peak	188	340	P
2	5700.00	5.12	64.96	70.08	105.20	-35.12	Peak	188	340	P
3	5720.00	5.13	83.85	88.98	110.80	-21.82	Peak	188	340	P
4	5725.00	5.14	90.33	95.47	122.20	-26.73	Peak	188	340	P
5	11490.00	13.27	30.01	43.28	54.00	-10.72	Average	368	295	P
6	11490.00	13.27	42.61	55.88	74.00	-18.12	Peak	368	295	P
7	17235.00	18.83	42.11	60.94	68.20	-7.26	Peak	100	316	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 4, CH149		:

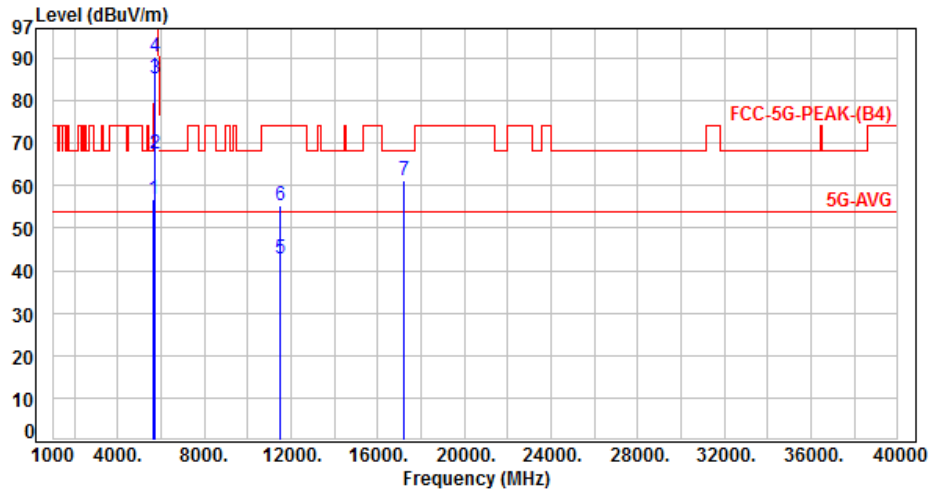


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	51.56	56.65	68.20	-11.55	Peak	128	32	P
2	5700.00	5.12	62.55	67.67	105.20	-37.53	Peak	128	32	P
3	5720.00	5.13	80.24	85.37	110.80	-25.43	Peak	128	32	P
4	5725.00	5.14	85.28	90.42	122.20	-31.78	Peak	128	32	P
5	11490.00	13.27	29.62	42.89	54.00	-11.11	Average	100	12	P
6	11490.00	13.27	41.94	55.21	74.00	-18.79	Peak	100	12	P
7	17235.00	18.83	42.49	61.32	68.20	-6.88	Peak	100	52	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 4, CH157		:

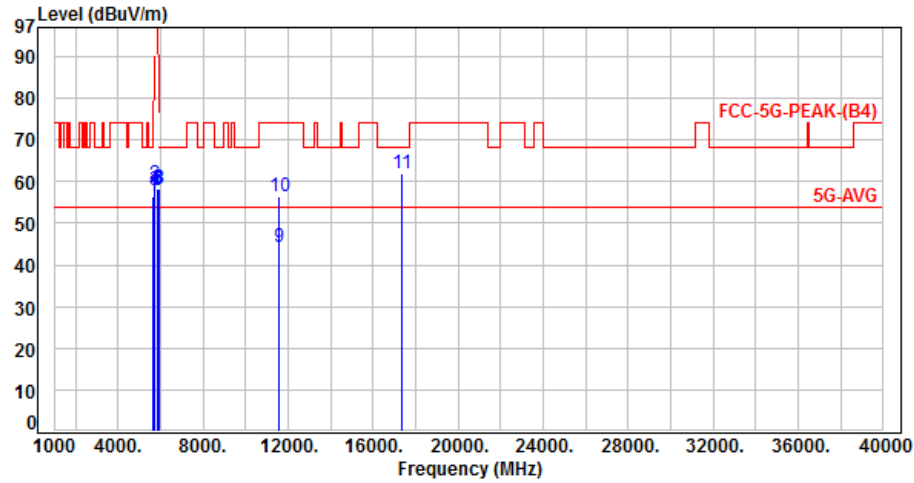


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	51.50	56.59	68.20	-11.61	Peak	206	346	P
2	5700.00	5.12	54.36	59.48	105.20	-45.72	Peak	206	346	P
3	5720.00	5.13	52.85	57.98	110.80	-52.82	Peak	206	346	P
4	5725.00	5.14	52.65	57.79	122.20	-64.41	Peak	206	346	P
5	5850.00	5.21	53.12	58.33	122.20	-63.87	Peak	206	346	P
6	5855.00	5.23	52.58	57.81	110.80	-52.99	Peak	206	346	P
7	5875.00	5.31	52.46	57.77	105.20	-47.43	Peak	206	346	P
8	5925.00	5.49	52.73	58.22	68.20	-9.98	Peak	206	346	P
9	11570.00	13.50	30.85	44.35	54.00	-9.65	Average	388	254	P
10	11570.00	13.50	43.11	56.61	74.00	-17.39	Peak	388	254	P
11	17355.00	19.47	42.31	61.78	68.20	-6.42	Peak	100	331	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 4, CH157		:

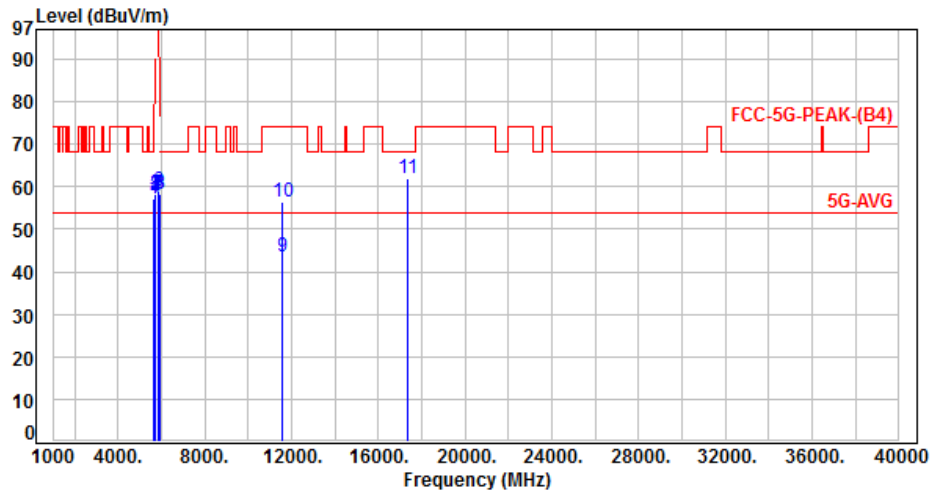


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	52.24	57.33	68.20	-10.87	Peak	106	29	P
2	5700.00	5.12	52.86	57.98	105.20	-47.22	Peak	106	29	P
3	5720.00	5.13	52.96	58.09	110.80	-52.71	Peak	106	29	P
4	5725.00	5.14	52.29	57.43	122.20	-64.77	Peak	106	29	P
5	5850.00	5.21	53.12	58.33	122.20	-63.87	Peak	106	29	P
6	5855.00	5.23	53.93	59.16	110.80	-51.64	Peak	106	29	P
7	5875.00	5.31	53.14	58.45	105.20	-46.75	Peak	106	29	P
8	5925.00	5.49	52.84	58.33	68.20	-9.87	Peak	106	29	P
9	11570.00	13.50	29.90	43.40	54.00	-10.60	Average	100	2	P
10	11570.00	13.50	42.89	56.39	74.00	-17.61	Peak	100	2	P
11	17355.00	19.47	42.36	61.83	68.20	-6.37	Peak	100	45	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 4, CH165		:

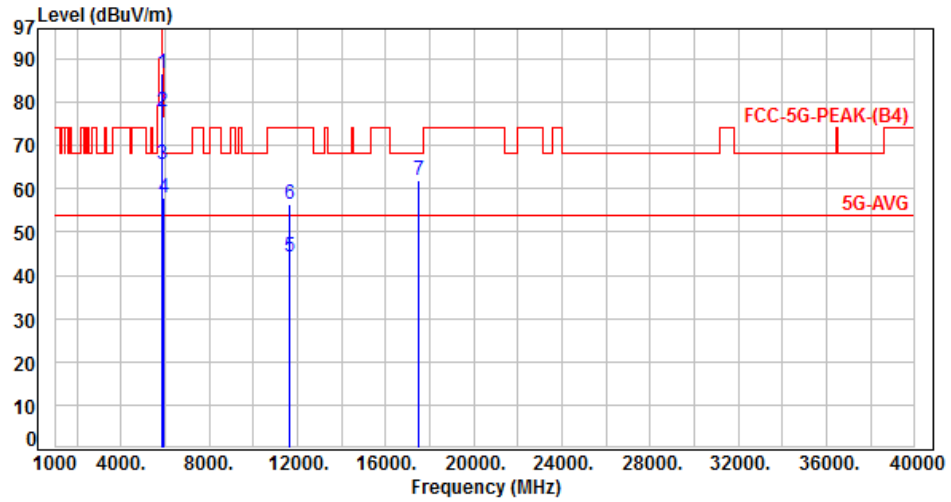


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	81.34	86.55	122.20	-35.65	Peak	226	349	P
2	5855.00	5.23	72.50	77.73	110.80	-33.07	Peak	226	349	P
3	5875.00	5.31	60.26	65.57	105.20	-39.63	Peak	226	349	P
4	5925.00	5.49	52.53	58.02	68.20	-10.18	Peak	226	349	P
5	11650.00	13.68	30.74	44.42	54.00	-9.58	Average	384	265	P
6	11650.00	13.68	42.70	56.38	74.00	-17.62	Peak	384	265	P
7	17475.00	20.39	41.69	62.08	68.20	-6.12	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 4, CH165		:

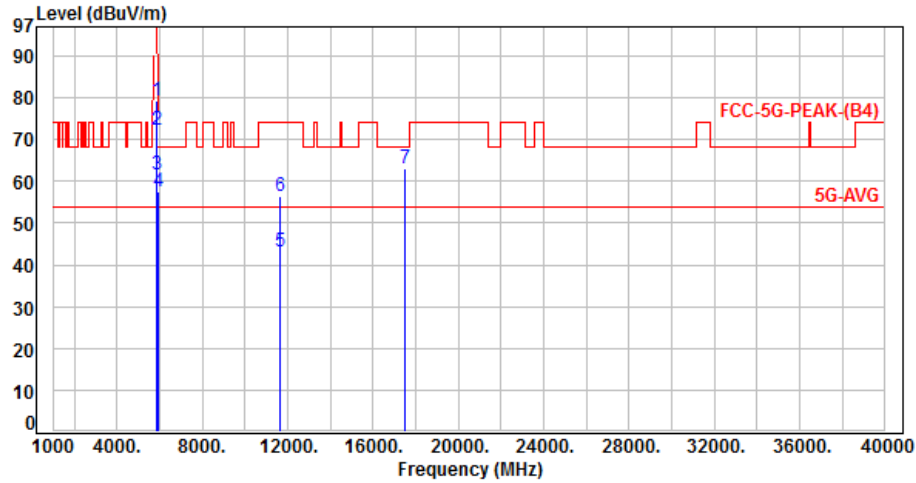


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	74.06	79.27	122.20	-42.93	Peak	120	33	P
2	5855.00	5.23	66.90	72.13	110.80	-38.67	Peak	120	33	P
3	5875.00	5.31	56.29	61.60	105.20	-43.60	Peak	120	33	P
4	5925.00	5.49	52.07	57.56	68.20	-10.64	Peak	120	33	P
5	11650.00	13.68	29.41	43.09	54.00	-10.91	Average	100	12	P
6	11650.00	13.68	42.65	56.33	74.00	-17.67	Peak	100	12	P
7	17475.00	20.39	42.83	63.22	68.20	-4.98	Peak	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 4, CH151		:

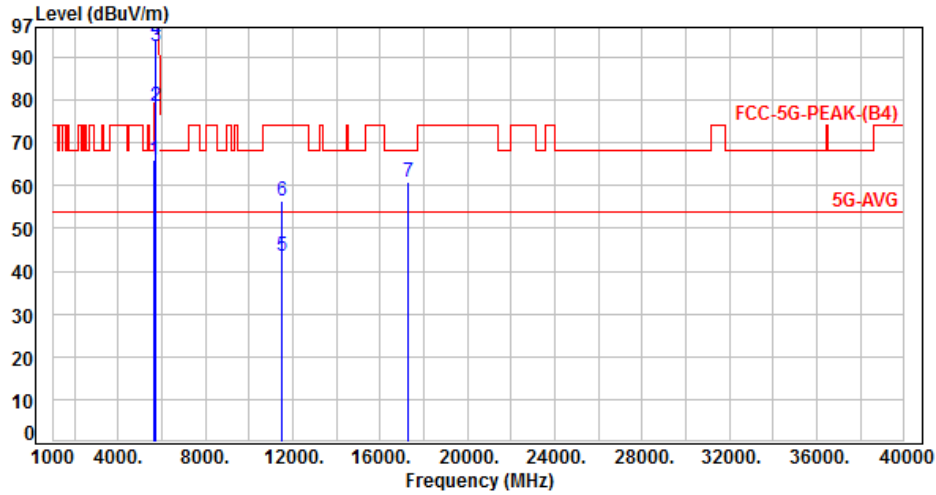


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	60.83	65.92	68.20	-2.28	Peak	210	346	P
2	5700.00	5.12	73.29	78.41	105.20	-26.79	Peak	210	346	P
3	5720.00	5.13	87.32	92.45	110.80	-18.35	Peak	210	346	P
4	5725.00	5.14	88.97	94.11	122.20	-28.09	Peak	210	346	P
5	11510.00	13.32	30.28	43.60	54.00	-10.40	Average	381	276	P
6	11510.00	13.32	42.97	56.29	74.00	-17.71	Peak	381	276	P
7	17265.00	18.96	41.97	60.93	68.20	-7.27	Peak	100	327	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 4, CH151		:

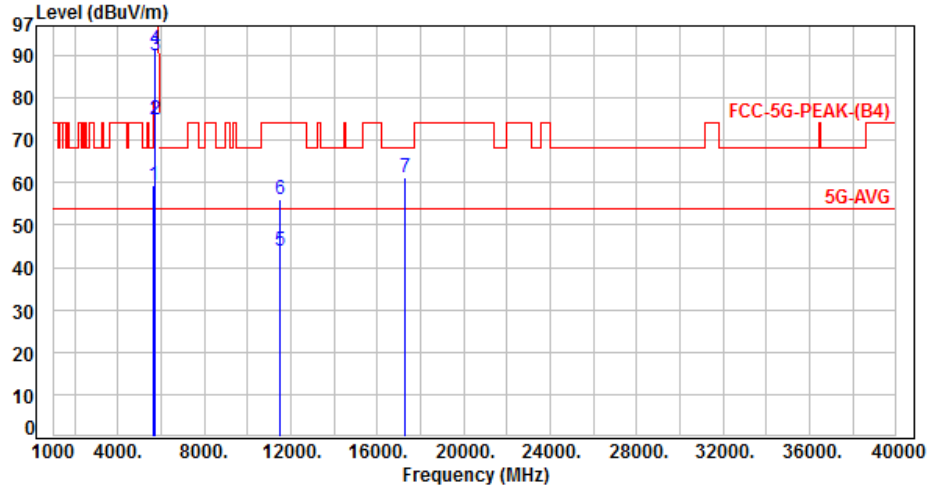


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	54.19	59.28	68.20	-8.92	Peak	126	42	P
2	5700.00	5.12	69.88	75.00	105.20	-30.20	Peak	126	42	P
3	5720.00	5.13	84.94	90.07	110.80	-20.73	Peak	126	42	P
4	5725.00	5.14	86.32	91.46	122.20	-30.74	Peak	126	42	P
5	11510.00	13.32	30.72	44.04	54.00	-9.96	Average	100	16	P
6	11510.00	13.32	42.61	55.93	74.00	-18.07	Peak	100	16	P
7	17265.00	18.96	42.14	61.10	68.20	-7.10	Peak	100	54	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 4, CH159		:

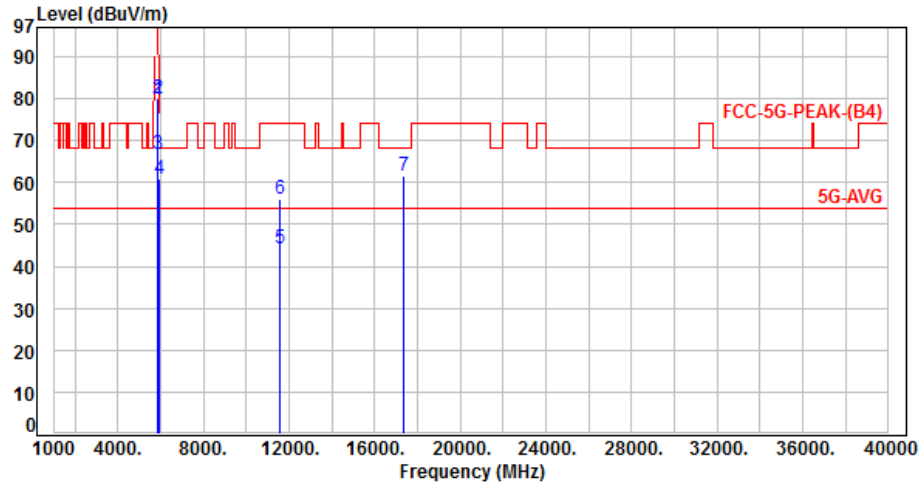


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	74.33	79.54	122.20	-42.66	Peak	213	348	P
2	5855.00	5.23	74.91	80.14	110.80	-30.66	Peak	213	348	P
3	5875.00	5.31	61.48	66.79	105.20	-38.41	Peak	213	348	P
4	5925.00	5.49	55.19	60.68	68.20	-7.52	Peak	213	348	P
5	11590.00	13.55	30.63	44.18	54.00	-9.82	Average	366	281	P
6	11590.00	13.55	42.47	56.02	74.00	-17.98	Peak	366	281	P
7	17385.00	19.66	41.96	61.62	68.20	-6.58	Peak	100	324	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 4, CH159		:

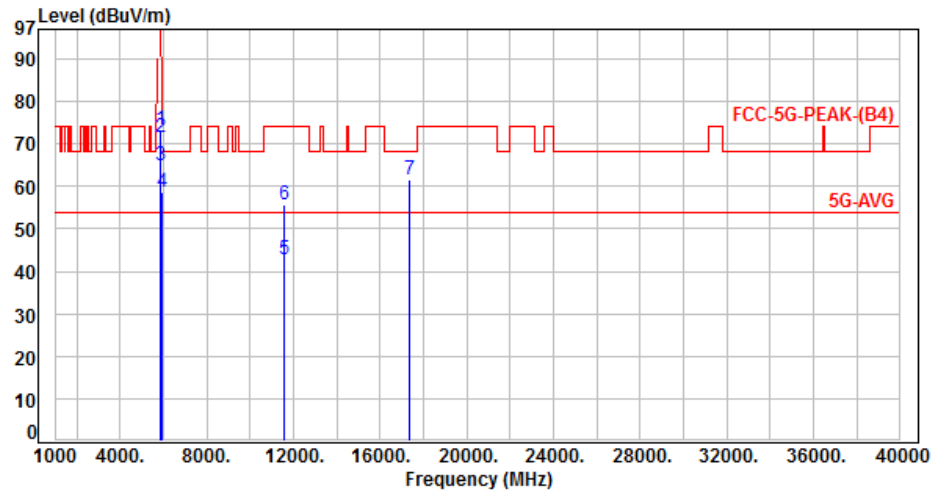


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	5.21	68.12	73.33	122.20	-48.87	Peak	105	35	P
2	5855.00	5.23	66.38	71.61	110.80	-39.19	Peak	105	35	P
3	5875.00	5.31	59.77	65.08	105.20	-40.12	Peak	105	35	P
4	5925.00	5.49	53.18	58.67	68.20	-9.53	Peak	105	35	P
5	11590.00	13.55	29.18	42.73	54.00	-11.27	Average	100	7	P
6	11590.00	13.55	42.01	55.56	74.00	-18.44	Peak	100	7	P
7	17385.00	19.66	42.04	61.70	68.20	-6.50	Peak	100	69	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, Band 4, CH155		:

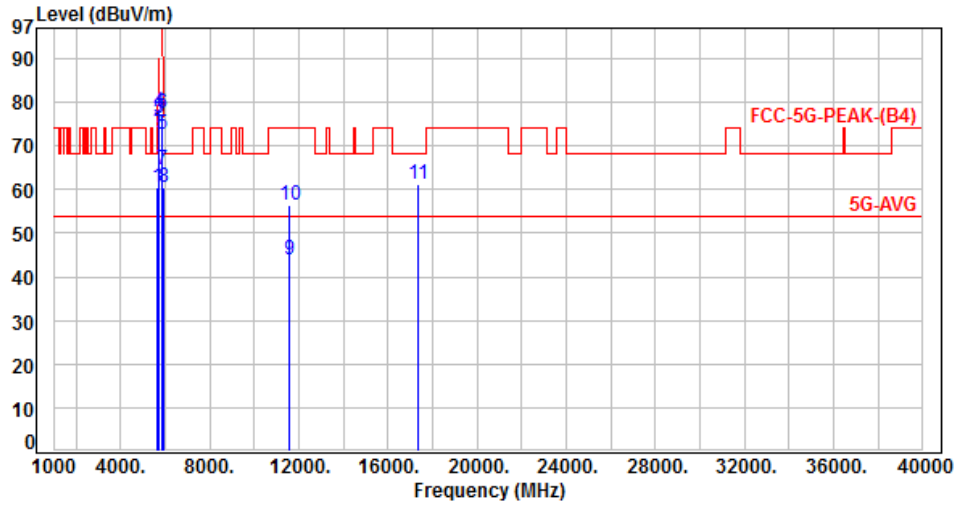


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	55.44	60.53	68.20	-7.67	Peak	214	318	P
2	5700.00	5.12	70.41	75.53	105.20	-29.67	Peak	214	318	P
3	5720.00	5.13	71.09	76.22	110.80	-34.58	Peak	214	318	P
4	5725.00	5.14	72.86	78.00	122.20	-44.20	Peak	214	318	P
5	5850.00	5.21	67.61	72.82	122.20	-49.38	Peak	214	318	P
6	5855.00	5.23	72.40	77.63	110.80	-33.17	Peak	214	318	P
7	5875.00	5.31	59.36	64.67	105.20	-40.53	Peak	214	318	P
8	5925.00	5.49	54.87	60.36	68.20	-7.84	Peak	214	318	P
9	11550.00	13.44	30.59	44.03	54.00	-9.97	Average	377	254	P
10	11550.00	13.44	43.08	56.52	74.00	-17.48	Peak	377	254	P
11	17325.00	19.27	41.87	61.14	68.20	-7.06	Peak	100	355	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, Band 4, CH155		:

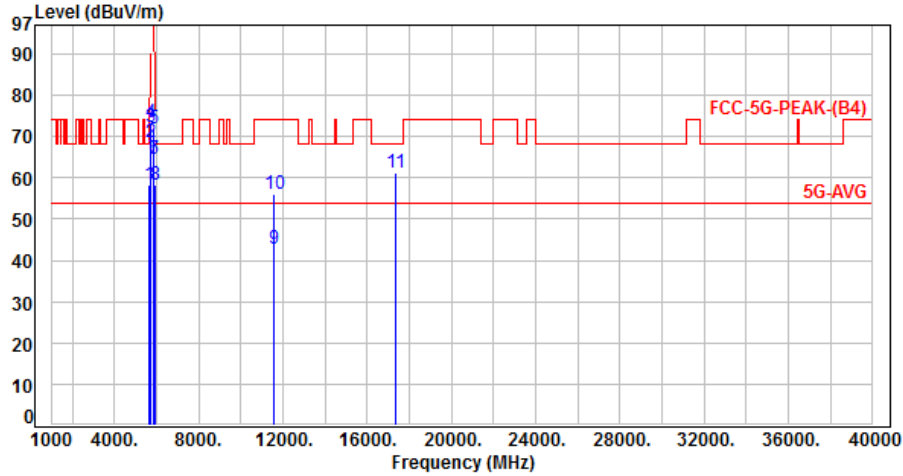


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.09	53.18	58.27	68.20	-9.93	Peak	139	33	P
2	5700.00	5.12	63.41	68.53	105.20	-36.67	Peak	139	33	P
3	5720.00	5.13	67.32	72.45	110.80	-38.35	Peak	139	33	P
4	5725.00	5.14	68.31	73.45	122.20	-48.75	Peak	139	33	P
5	5850.00	5.21	66.60	71.81	122.20	-50.39	Peak	139	33	P
6	5855.00	5.23	59.18	64.41	110.80	-46.39	Peak	139	33	P
7	5875.00	5.31	59.33	64.64	105.20	-40.56	Peak	139	33	P
8	5925.00	5.49	52.79	58.28	68.20	-9.92	Peak	139	33	P
9	11550.00	13.44	29.43	42.87	54.00	-11.13	Average	100	14	P
10	11550.00	13.44	42.68	56.12	74.00	-17.88	Peak	100	14	P
11	17325.00	19.27	41.98	61.25	68.20	-6.95	Peak	100	67	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 16, Band 2 Straddle Channel, CH50		

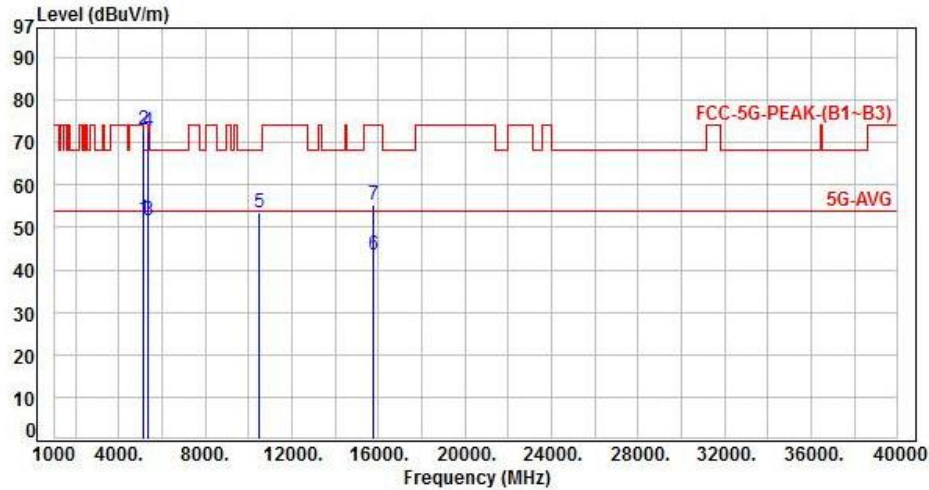


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	47.29	51.98	54.00	-2.02	Average	204	330	P
2	5150.00	4.69	68.24	72.93	74.00	-1.07	Peak	204	330	P
3	5350.00	5.02	46.72	51.74	54.00	-2.26	Average	210	358	P
4	5350.00	5.02	67.58	72.60	74.00	-1.40	Peak	210	358	P
5	10500.00	11.73	41.68	53.41	68.20	-14.79	Peak	264	283	P
6	15750.00	13.17	30.27	43.44	54.00	-10.56	Average	362	254	P
7	15750.00	13.17	42.14	55.31	74.00	-18.69	Peak	362	254	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 16, Band 2 Straddle Channel, CH50		

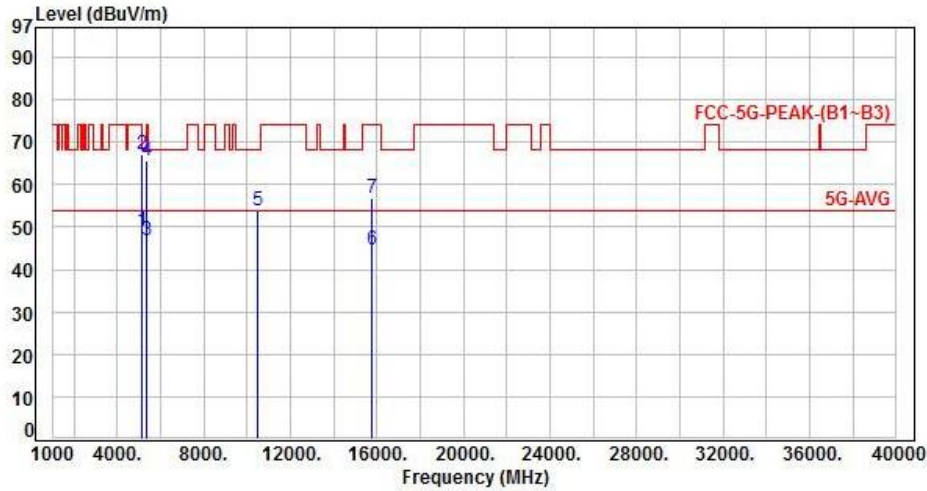


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.69	44.23	48.92	54.00	-5.08	Average	199	71	P
2	5150.00	4.69	62.37	67.06	74.00	-6.94	Peak	199	71	P
3	5350.00	5.02	41.80	46.82	54.00	-7.18	Average	139	60	P
4	5350.00	5.02	60.71	65.73	74.00	-8.27	Peak	139	60	P
5	10500.00	11.73	41.94	53.67	68.20	-14.53	Peak	100	74	P
6	15750.00	13.17	31.42	44.59	54.00	-9.41	Average	100	59	P
7	15750.00	13.17	43.55	56.72	74.00	-17.28	Peak	100	59	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 16, Band 3 Straddle Channel, CH114		

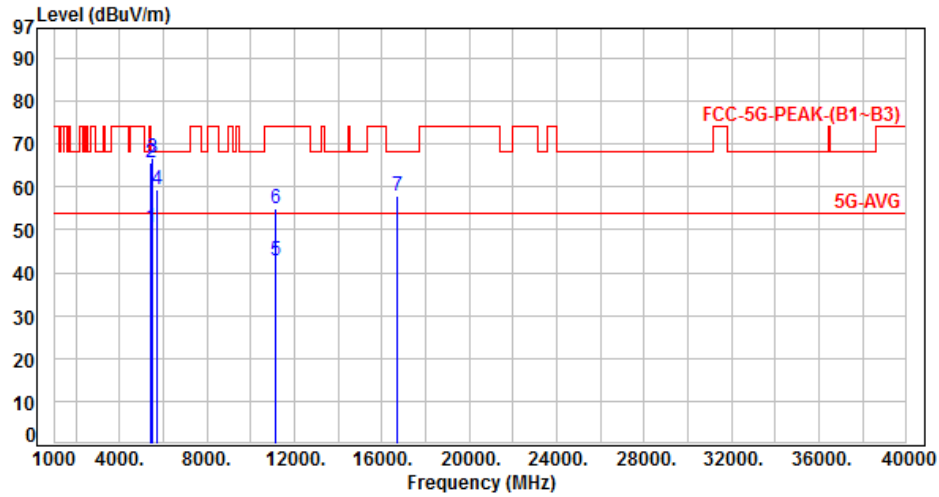


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	45.14	50.34	54.00	-3.66	Average	194	360	P
2	5460.00	5.20	60.28	65.48	74.00	-8.52	Peak	194	360	P
3	5470.00	5.20	61.66	66.86	68.20	-1.34	Peak	194	360	P
4	5725.00	5.14	54.40	59.54	68.20	-8.66	Peak	199	360	P
5	11140.00	12.63	30.31	42.94	54.00	-11.06	Average	292	318	P
6	11140.00	12.63	42.18	54.81	74.00	-19.19	Peak	292	318	P
7	16710.00	15.65	42.16	57.81	68.20	-10.39	Peak	100	326	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 16, Band 3 Straddle Channel, CH114		

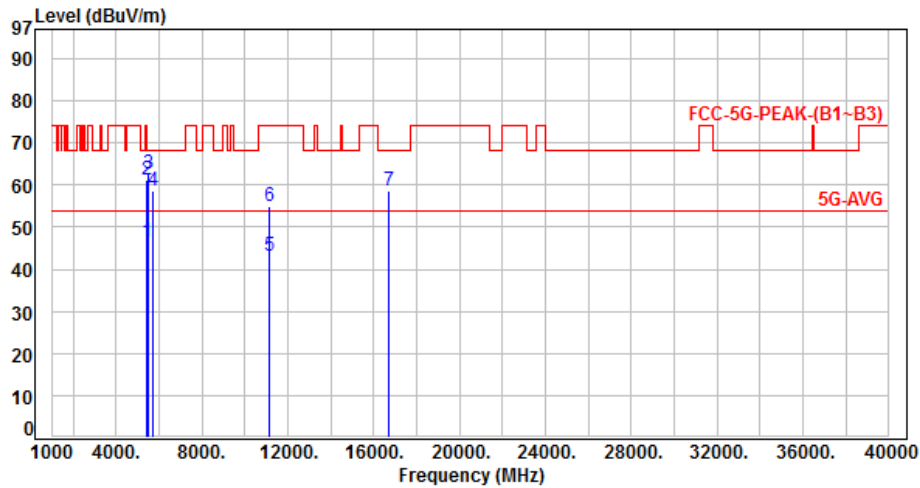


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	41.23	46.43	54.00	-7.57	Average	111	134	P
2	5460.00	5.20	56.04	61.24	74.00	-12.76	Peak	111	134	P
3	5470.00	5.20	57.59	62.79	68.20	-5.41	Peak	111	134	P
4	5725.00	5.14	53.49	58.63	68.20	-9.57	Peak	100	159	P
5	11140.00	12.63	30.65	43.28	54.00	-10.72	Average	100	51	P
6	11140.00	12.63	42.45	55.08	74.00	-18.92	Peak	100	51	P
7	16710.00	15.65	42.89	58.54	68.20	-9.66	Peak	100	69	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 3 Straddle Channel, CH144		:

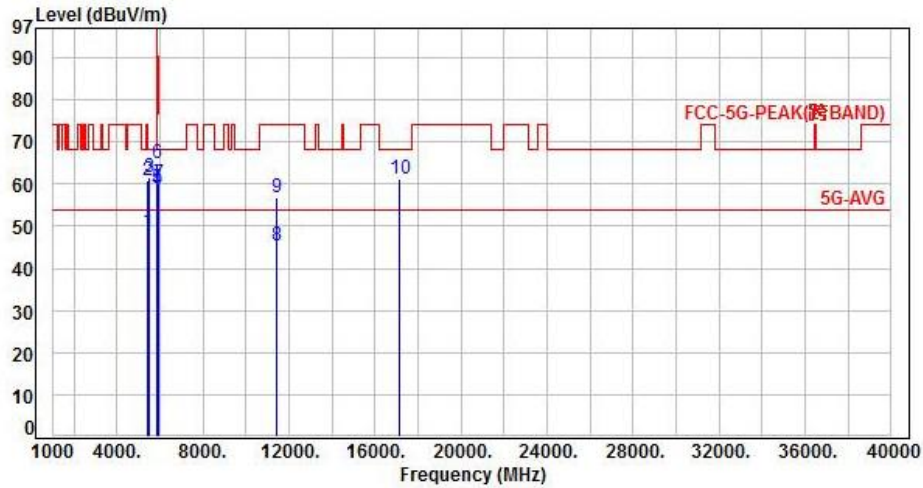


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	43.56	48.76	54.00	-5.24	Average	242	300	P
2	5460.00	5.20	55.53	60.73	74.00	-13.27	Peak	242	300	P
3	5470.00	5.20	56.56	61.76	68.20	-6.44	Peak	242	300	P
4	5850.00	5.21	53.52	58.73	122.20	-63.47	Peak	105	271	P
5	5855.00	5.23	53.78	59.01	110.80	-51.79	Peak	105	271	P
6	5875.00	5.31	59.75	65.06	105.20	-40.14	Peak	105	271	P
7	5925.00	5.49	54.59	60.08	68.20	-8.12	Peak	105	271	P
8	11440.00	13.08	32.30	45.38	54.00	-8.62	Average	100	48	P
9	11440.00	13.08	43.76	56.84	74.00	-17.16	Peak	100	48	P
10	17160.00	18.42	42.65	61.07	68.20	-7.13	Peak	100	134	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 3 Straddle Channel, CH144		:

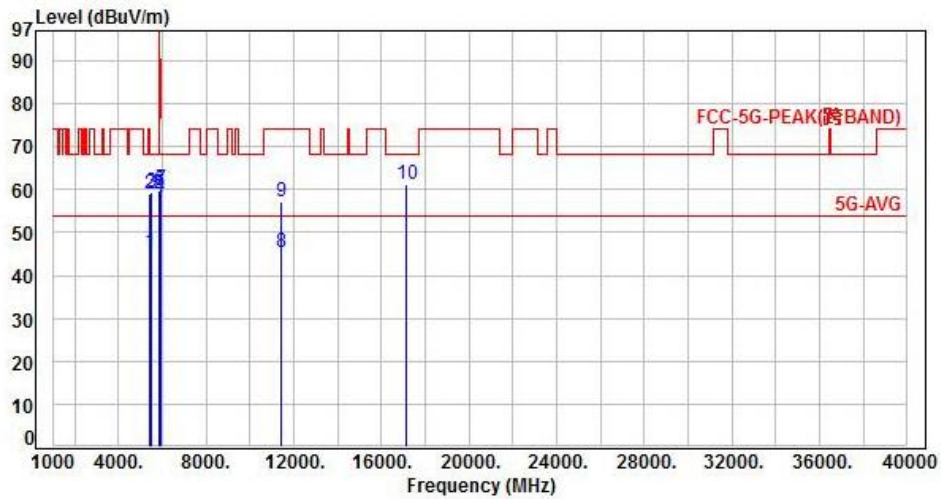


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	40.14	45.34	54.00	-8.66	Average	100	204	P
2	5460.00	5.20	53.95	59.15	74.00	-14.85	Peak	100	204	P
3	5470.00	5.20	54.29	59.49	68.20	-8.71	Peak	100	204	P
4	5850.00	5.21	52.99	58.20	122.20	-64.00	Peak	100	204	P
5	5855.00	5.23	53.60	58.83	110.80	-51.97	Peak	100	204	P
6	5875.00	5.31	54.41	59.72	105.20	-45.48	Peak	100	204	P
7	5925.00	5.49	54.77	60.26	68.20	-7.94	Peak	100	204	P
8	11440.00	13.08	32.42	45.50	54.00	-8.50	Average	109	348	P
9	11440.00	13.08	43.91	56.99	74.00	-17.01	Peak	109	348	P
10	17160.00	18.42	42.77	61.19	68.20	-7.01	Peak	100	351	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 3 Straddle Channel, CH142		

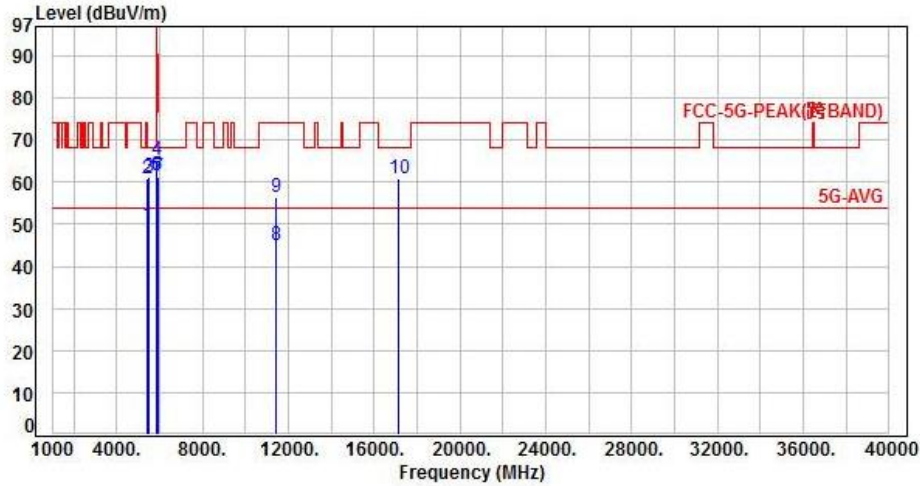


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	44.75	49.95	54.00	-4.05	Average	107	298	P
2	5460.00	5.20	55.48	60.68	74.00	-13.32	Peak	107	298	P
3	5470.00	5.20	56.15	61.35	68.20	-6.85	Peak	107	298	P
4	5850.00	5.21	60.16	65.37	122.20	-56.83	Peak	107	298	P
5	5855.00	5.23	56.41	61.64	110.80	-49.16	Peak	107	298	P
6	5875.00	5.31	56.29	61.60	105.20	-43.60	Peak	107	298	P
7	5925.00	5.49	55.58	61.07	68.20	-7.13	Peak	107	298	P
8	11420.00	13.01	32.15	45.16	54.00	-8.84	Average	100	51	P
9	11420.00	13.01	43.55	56.56	74.00	-17.44	Peak	100	51	P
10	17130.00	18.23	42.50	60.73	68.20	-7.47	Peak	100	138	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 3 Straddle Channel, CH142		:

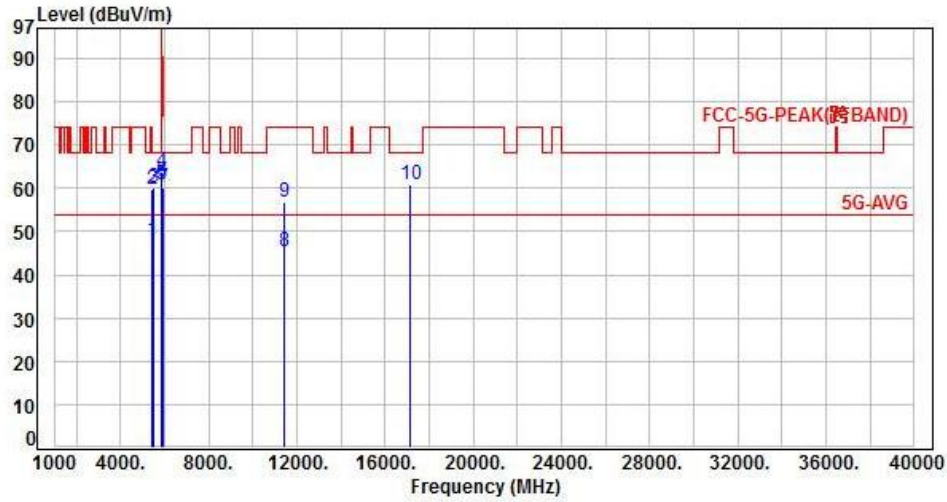


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	42.87	48.07	54.00	-5.93	Average	29	181	P
2	5460.00	5.20	54.53	59.73	74.00	-14.27	Peak	29	181	P
3	5470.00	5.20	54.86	60.06	68.20	-8.14	Peak	29	181	P
4	5850.00	5.21	58.59	63.80	122.20	-58.40	Peak	29	181	P
5	5855.00	5.23	55.65	60.88	110.80	-49.92	Peak	29	181	P
6	5875.00	5.31	56.30	61.61	105.20	-43.59	Peak	29	181	P
7	5925.00	5.49	54.81	60.30	68.20	-7.90	Peak	29	181	P
8	11420.00	13.01	32.29	45.30	54.00	-8.70	Average	106	345	P
9	11420.00	13.01	43.83	56.84	74.00	-17.16	Peak	106	345	P
10	17130.00	18.23	42.60	60.83	68.20	-7.37	Peak	100	353	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 15, Band 3 Straddle Channel, CH138		:

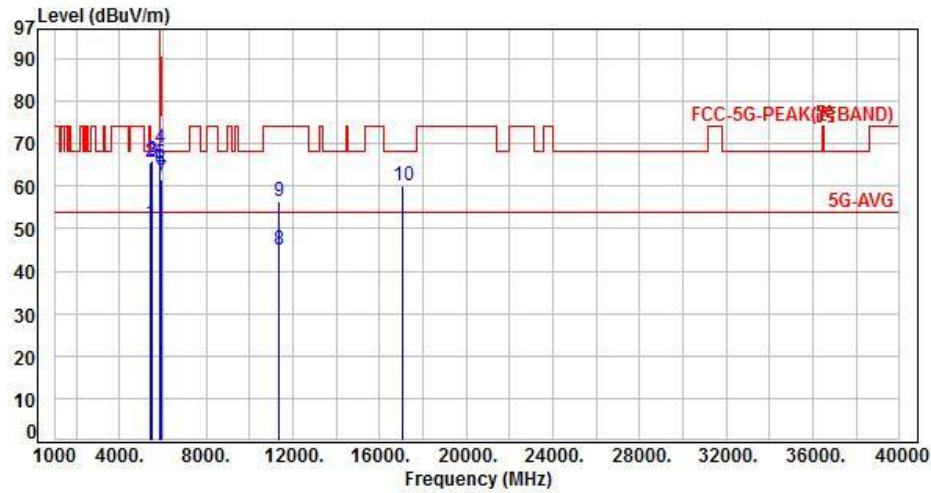


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	45.96	51.16	54.00	-2.84	Average	101	294	P
2	5460.00	5.20	60.50	65.70	74.00	-8.30	Peak	101	294	P
3	5470.00	5.20	60.97	66.17	68.20	-2.03	Peak	101	294	P
4	5850.00	5.21	63.66	68.87	122.20	-53.33	Peak	101	294	P
5	5855.00	5.23	60.08	65.31	110.80	-45.49	Peak	101	294	P
6	5875.00	5.31	58.54	63.85	105.20	-41.35	Peak	101	294	P
7	5925.00	5.49	55.95	61.44	68.20	-6.76	Peak	101	294	P
8	11380.00	12.91	32.11	45.02	54.00	-8.98	Average	100	44	P
9	11380.00	12.91	43.35	56.26	74.00	-17.74	Peak	100	44	P
10	17070.00	17.93	42.31	60.24	68.20	-7.96	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 15, Band 3 Straddle Channel, CH138		:

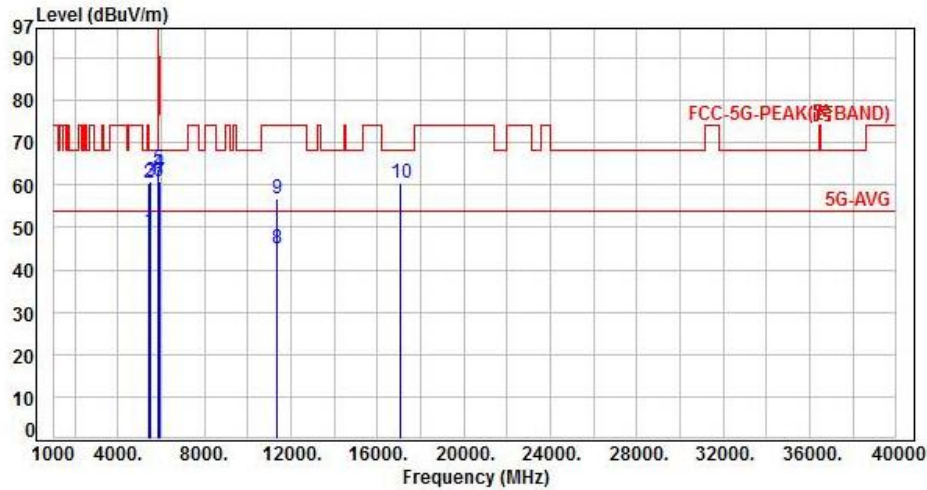


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	44.02	49.22	54.00	-4.78	Average	163	46	P
2	5460.00	5.20	55.22	60.42	74.00	-13.58	Peak	163	46	P
3	5470.00	5.20	55.64	60.84	68.20	-7.36	Peak	163	46	P
4	5850.00	5.21	57.38	62.59	122.20	-59.61	Peak	163	46	P
5	5855.00	5.23	58.74	63.97	110.80	-46.83	Peak	163	46	P
6	5875.00	5.31	55.36	60.67	105.20	-44.53	Peak	163	46	P
7	5925.00	5.49	55.47	60.96	68.20	-7.24	Peak	163	46	P
8	11380.00	12.91	32.23	45.14	54.00	-8.86	Average	112	353	P
9	11380.00	12.91	43.79	56.70	74.00	-17.30	Peak	112	353	P
10	17070.00	17.93	42.62	60.55	68.20	-7.65	Peak	100	344	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 17, Band 3 Straddle Channel, CH144		:

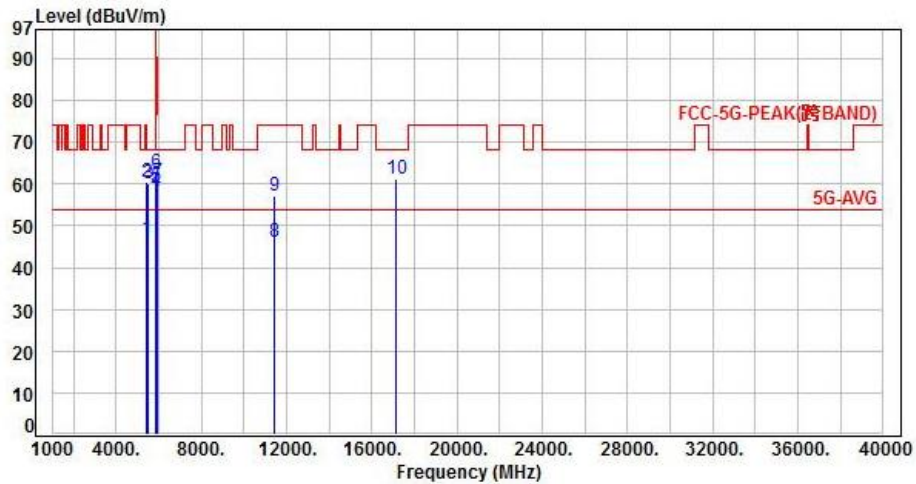


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	41.71	46.91	54.00	-7.09	Average	161	345	P
2	5460.00	5.20	55.44	60.64	74.00	-13.36	Peak	161	345	P
3	5470.00	5.20	54.80	60.00	68.20	-8.20	Peak	161	345	P
4	5850.00	5.21	53.04	58.25	122.20	-63.95	Peak	161	345	P
5	5855.00	5.23	54.24	59.47	110.80	-51.33	Peak	161	345	P
6	5875.00	5.31	57.37	62.68	105.20	-42.52	Peak	161	345	P
7	5925.00	5.49	54.89	60.38	68.20	-7.82	Peak	161	345	P
8	11440.00	13.08	33.19	46.27	54.00	-7.73	Average	100	62	P
9	11440.00	13.08	43.92	57.00	74.00	-17.00	Peak	100	62	P
10	17160.00	18.42	42.89	61.31	68.20	-6.89	Peak	100	126	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 17, Band 3 Straddle Channel, CH144		:

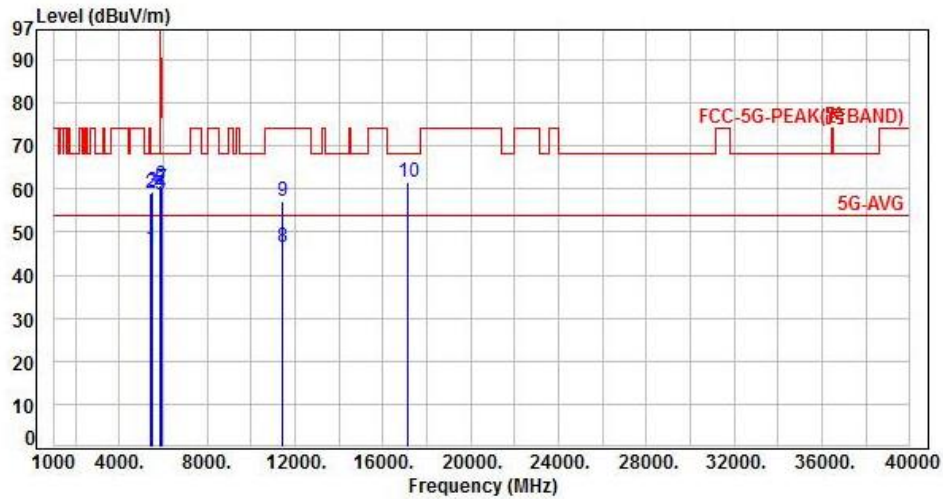


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	40.99	46.19	54.00	-7.81	Average	208	23	P
2	5460.00	5.20	53.92	59.12	74.00	-14.88	Peak	208	23	P
3	5470.00	5.20	54.27	59.47	68.20	-8.73	Peak	208	23	P
4	5850.00	5.21	53.73	58.94	122.20	-63.26	Peak	208	23	P
5	5855.00	5.23	53.29	58.52	110.80	-52.28	Peak	208	23	P
6	5875.00	5.31	55.59	60.90	105.20	-44.30	Peak	208	23	P
7	5925.00	5.49	54.60	60.09	68.20	-8.11	Peak	208	23	P
8	11440.00	13.08	33.29	46.37	54.00	-7.63	Average	105	344	P
9	11440.00	13.08	44.07	57.15	74.00	-16.85	Peak	105	344	P
10	17160.00	18.42	43.18	61.60	68.20	-6.60	Peak	105	344	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 18, Band 3 Straddle Channel, CH142		

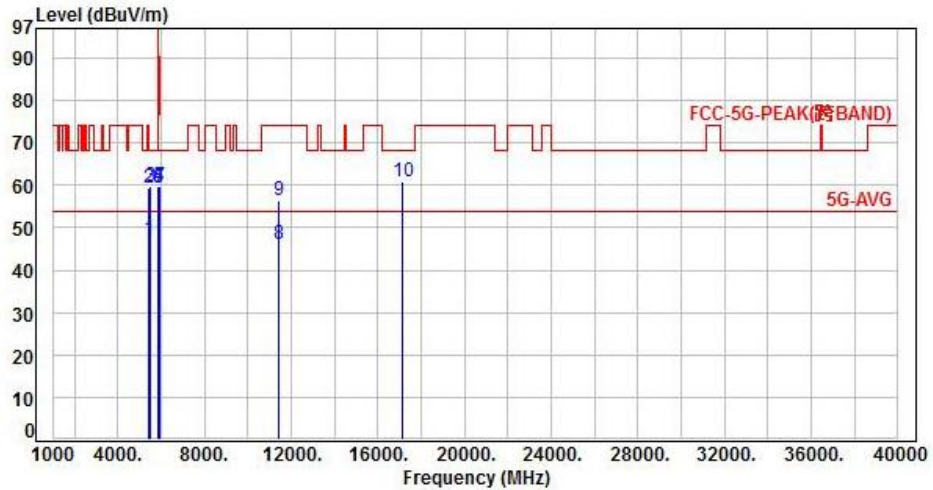


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	41.98	47.18	54.00	-6.82	Average	291	80	P
2	5460.00	5.20	54.18	59.38	74.00	-14.62	Peak	291	80	P
3	5470.00	5.20	54.65	59.85	68.20	-8.35	Peak	291	80	P
4	5850.00	5.21	54.59	59.80	122.20	-62.40	Peak	291	80	P
5	5855.00	5.23	54.01	59.24	110.80	-51.56	Peak	291	80	P
6	5875.00	5.31	54.18	59.49	105.20	-45.71	Peak	291	80	P
7	5925.00	5.49	54.27	59.76	68.20	-8.44	Peak	291	80	P
8	11420.00	13.01	33.03	46.04	54.00	-7.96	Average	100	59	P
9	11420.00	13.01	43.59	56.60	74.00	-17.40	Peak	100	59	P
10	17130.00	18.23	42.44	60.67	68.20	-7.53	Peak	100	131	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 18, Band 3 Straddle Channel, CH142		:

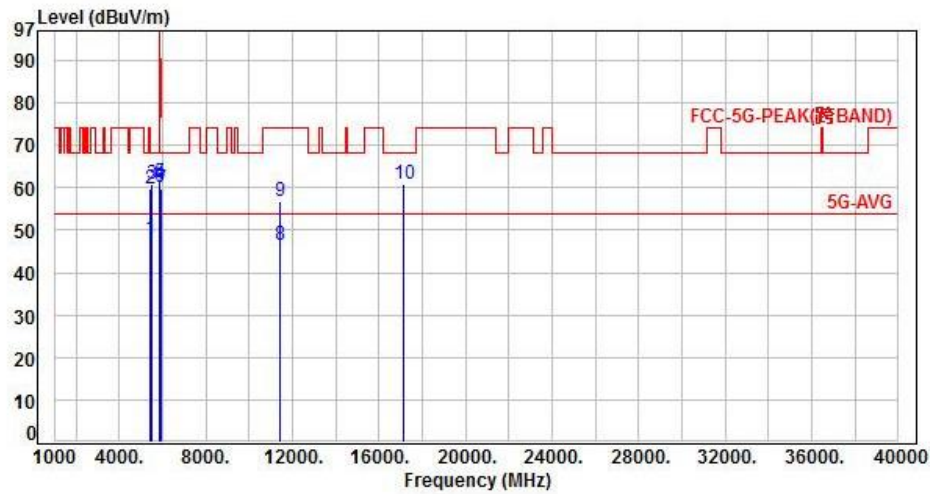


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	42.63	47.83	54.00	-6.17	Average	157	43	P
2	5460.00	5.20	54.54	59.74	74.00	-14.26	Peak	157	43	P
3	5470.00	5.20	55.61	60.81	68.20	-7.39	Peak	157	43	P
4	5850.00	5.21	55.78	60.99	122.20	-61.21	Peak	157	43	P
5	5855.00	5.23	55.86	61.09	110.80	-49.71	Peak	157	43	P
6	5875.00	5.31	54.63	59.94	105.20	-45.26	Peak	157	43	P
7	5925.00	5.49	54.09	59.58	68.20	-8.62	Peak	157	43	P
8	11420.00	13.01	33.48	46.49	54.00	-7.51	Average	106	353	P
9	11420.00	13.01	43.78	56.79	74.00	-17.21	Peak	106	353	P
10	17130.00	18.23	42.67	60.90	68.20	-7.30	Peak	106	353	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, Band 3 Straddle Channel, CH138		:

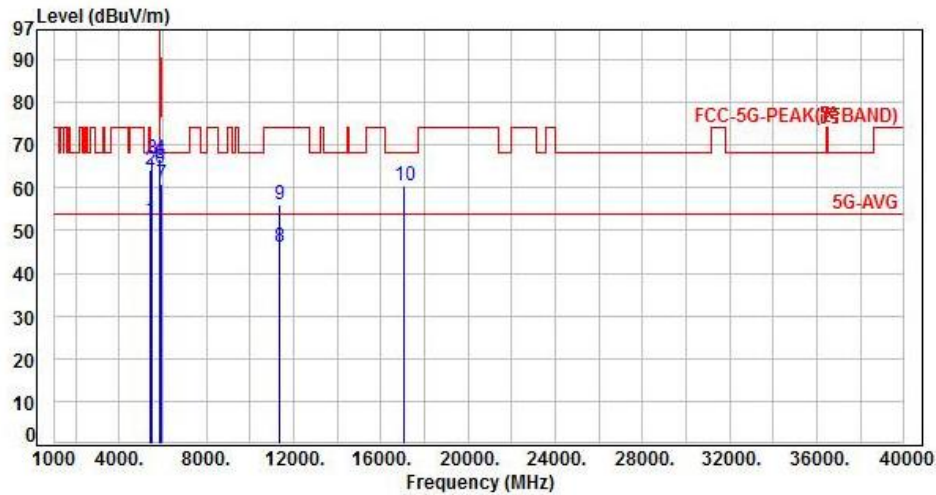


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	47.06	52.26	54.00	-1.74	Average	206	348	P
2	5460.00	5.20	58.93	64.13	74.00	-9.87	Peak	206	348	P
3	5470.00	5.20	61.70	66.90	68.20	-1.30	Peak	206	348	P
4	5850.00	5.21	61.54	66.75	122.20	-55.45	Peak	206	348	P
5	5855.00	5.23	60.35	65.58	110.80	-45.22	Peak	206	348	P
6	5875.00	5.31	59.31	64.62	105.20	-40.58	Peak	206	348	P
7	5925.00	5.49	55.45	60.94	68.20	-7.26	Peak	206	348	P
8	11380.00	12.91	33.05	45.96	54.00	-8.04	Average	100	47	P
9	11380.00	12.91	43.33	56.24	74.00	-17.76	Peak	100	47	P
10	17070.00	17.93	42.38	60.31	68.20	-7.89	Peak	100	142	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, Band 3 Straddle Channel, CH138		:

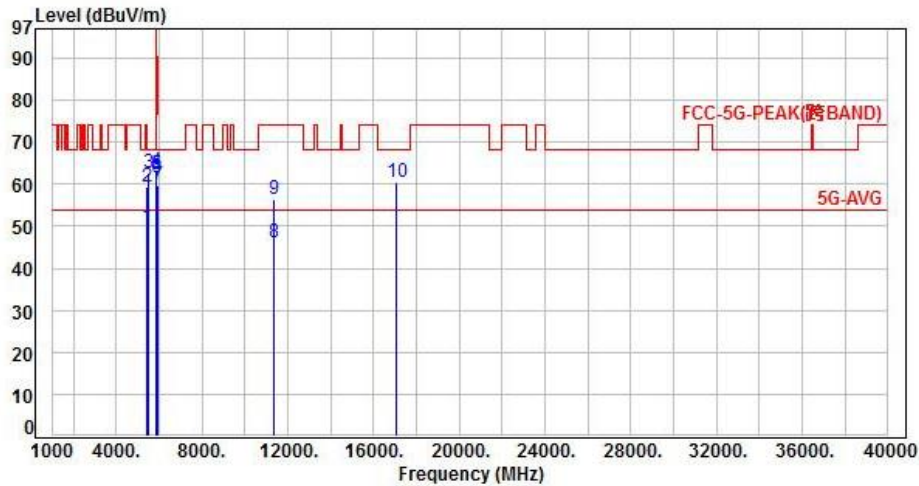

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	5.20	44.70	49.90	54.00	-4.10	Average	137	286	P
2	5460.00	5.20	54.32	59.52	74.00	-14.48	Peak	137	286	P
3	5470.00	5.20	57.57	62.77	68.20	-5.43	Peak	137	286	P
4	5850.00	5.21	57.83	63.04	122.20	-59.16	Peak	137	286	P
5	5855.00	5.23	57.25	62.48	110.80	-48.32	Peak	137	286	P
6	5875.00	5.31	56.46	61.77	105.20	-43.43	Peak	137	286	P
7	5925.00	5.49	54.09	59.58	68.20	-8.62	Peak	137	286	P
8	11380.00	12.91	33.11	46.02	54.00	-7.98	Average	116	358	P
9	11380.00	12.91	43.62	56.53	74.00	-17.47	Peak	116	358	P
10	17070.00	17.93	42.46	60.39	68.20	-7.81	Peak	100	341	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data

Non-Beamforming

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	0.56	0.63	89.14%
802.11n HT20	4.96	5.02	98.80%
802.11n HT40	2.41	2.45	98.33%
802.11ac VHT20	4.98	5.04	98.81%
802.11ac VHT40	2.41	2.45	98.33%
802.11ac VHT80	1.14	1.20	95.00%
802.11ax HE20	4.00	4.05	98.81%
802.11ax HE40	2.03	2.11	96.49%
802.11ax HE80	1.00	1.08	93.40%
802.11ac VHT160	0.59	0.65	90.81%

Beamforming

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ac VHT20	3.50	3.74	93.68%
802.11ac VHT40	1.70	1.83	93.01%
802.11ac VHT80	4.64	4.80	96.67%
802.11ax HE20	0.27	1.40	19.49%
802.11ax HE40	0.18	1.60	10.94%
802.11ax HE80	0.13	1.40	8.96%
802.11ac VHT160	4.84	5.04	96.03%

7.5. Measurement Methods

26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H



Non-Beamforming
Modulation Type: 802.11a (6Mbps)



Modulation Type: 802.11ac VHT20 (6.5Mbps)



Modulation Type: 802.11n HT20 (6.5Mbps)



Modulation Type: 802.11ac VHT40 (13.5Mbps)



Modulation Type: 802.11n HT40 (13.5Mbps)



Modulation Type: 802.11ac VHT80 (29.3Mbps)





Non-Beamforming

Modulation Type: 802.11ac VHT160 (58.5Mbps)

Modulation Type: 802.11ax HE80(30.6Mbps)



Modulation Type: 802.11ax HE20(7.3Mbps)



Modulation Type: 802.11ax HE40(14.6Mbps)





Beamforming

Modulation Type: 802.11ac VHT20 (6.5Mbps)

Modulation Type: 802.11ac VHT160 (58.5Mbps)




Modulation Type: 802.11ac VHT40 (13.5Mbps)

Modulation Type: 802.11ax HE20(7.3Mbps)



Modulation Type: 802.11ac VHT80 (29.3Mbps)


Modulation Type: 802.11ax HE40(14.6Mbps)

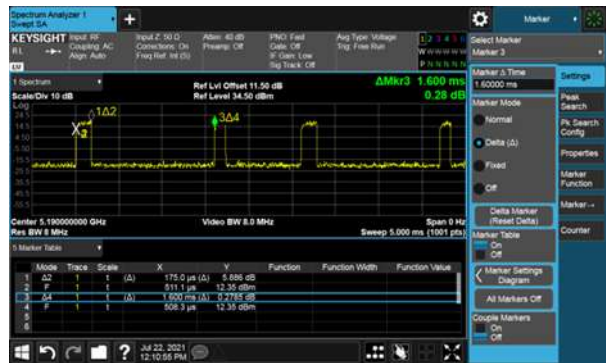



Beamforming

Modulation Type: 802.11ax HE80(30.6Mbps)

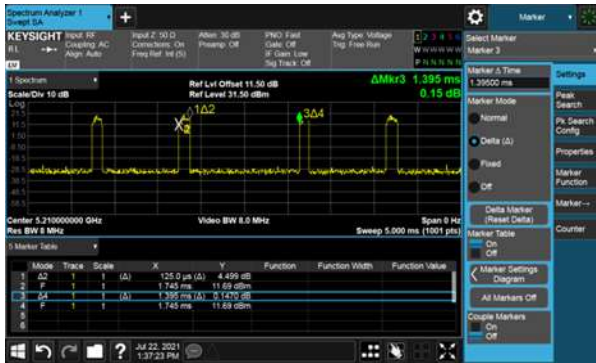



8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout





8.4. Test Result and Data

Non-Beamforming

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)					Minimum Limit (MHz)
			ANT A	ANT B	ANT C	ANT D	ANT E	
11a	149	5745	16.35	16.29	16.35	16.38	16.35	0.50
11a	157	5785	16.35	16.35	16.38	16.35	16.38	0.50
11a	165	5825	16.35	16.35	16.35	16.35	16.35	0.50
11ac VHT20	149	5745	17.61	17.61	17.61	17.61	17.61	0.50
11ac VHT20	157	5785	17.61	17.61	17.61	17.61	17.61	0.50
11ac VHT20	165	5825	17.61	17.61	17.61	17.58	17.61	0.50
11ac VHT40	151	5755	36.30	36.30	36.36	36.36	36.30	0.50
11ac VHT40	159	5795	36.36	36.30	36.36	36.36	36.30	0.50
11ac VHT80	155	5775	76.32	75.72	76.32	76.32	76.32	0.50
11ax HE20	149	5745	19.02	19.02	18.99	18.99	19.05	0.50
11ax HE20	157	5785	18.96	18.99	18.99	18.99	18.99	0.50
11ax HE20	165	5825	19.05	19.02	18.99	18.99	19.02	0.50
11ax HE40	151	5755	37.92	37.92	37.98	37.98	37.80	0.50
11ax HE40	159	5795	37.98	37.98	38.04	37.98	38.04	0.50
11ax HE80	155	5775	77.28	76.44	77.16	77.40	76.44	0.50

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)				
			ANT A	ANT B	ANT C	ANT D	ANT E
11a	149	5745	17.20	16.91	16.99	17.20	17.27
11a	157	5785	17.37	17.01	17.05	17.17	16.85
11a	165	5825	17.29	16.86	16.91	16.96	17.21
11ac VHT20	149	5745	18.30	18.23	18.25	18.30	18.28
11ac VHT20	157	5785	18.27	18.22	18.25	18.28	18.28
11ac VHT20	165	5825	18.33	18.27	18.31	18.32	18.29
11ac VHT40	151	5755	37.40	37.39	37.31	37.28	37.37
11ac VHT40	159	5795	37.21	37.38	37.19	37.24	37.19
11ac VHT80	155	5775	76.45	76.20	76.38	76.32	76.53
11ax HE20	149	5745	19.20	19.19	19.22	19.20	19.23
11ax HE20	157	5785	19.25	19.27	19.25	19.22	19.13
11ax HE20	165	5825	19.26	19.23	19.26	19.24	19.28
11ax HE40	151	5755	38.31	38.29	38.31	38.27	38.33
11ax HE40	159	5795	38.38	38.29	38.38	38.32	38.31
11ax HE80	155	5775	77.24	77.11	77.26	77.18	77.20



Non-Beamforming

UNII Emission Bandwidth Result (Extends across 5725MHz band)							
Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth(MHz)				
			ANT A	ANT B	ANT C	ANT D	ANT E
11a	6 Mbps	5720	3.14	3.15	3.15	3.15	3.15
11ac VHT20	MCS0-NSS1	5720	3.79	3.84	3.78	3.76	3.77
11ac VHT40	MCS0-NSS1	5710	3.15	3.14	3.15	3.14	3.14
11ac VHT80	MCS0-NSS1	5690	3.17	3.16	3.15	3.15	3.15
11ax HE20	MCS0-NSS1	5720	4.45	4.48	4.44	4.44	4.47
11ax HE40	MCS0-NSS1	5710	4.01	3.99	4.01	4.00	4.00
11ax HE80	MCS0-NSS1	5690	3.74	3.75	3.73	3.73	3.70

UNII Emission Bandwidth Result (Extends across 5725MHz band)							
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)				
			ANT A	ANT B	ANT C	ANT D	ANT E
11a	6 Mbps	5720	4.91	4.68	5.00	5.07	5.14
11ac VHT20	MCS0-NSS1	5720	5.48	5.49	5.46	5.50	5.45
11ac VHT40	MCS0-NSS1	5710	5.40	5.41	5.37	5.43	5.39
11ac VHT80	MCS0-NSS1	5690	9.46	9.86	9.67	9.41	9.03
11ax HE20	MCS0-NSS1	5720	5.25	5.26	5.24	5.29	5.13
11ax HE40	MCS0-NSS1	5710	5.24	5.25	5.26	5.23	5.24
11ax HE80	MCS0-NSS1	5690	5.05	5.05	5.09	5.00	4.85



Beamforming

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)					Minimum Limit (MHz)
			ANT A	ANT B	ANT C	ANT D	ANT E	
11ac VHT20	149	5745	17.73	17.16	17.25	17.70	17.64	0.50
11ac VHT20	157	5785	17.49	17.61	17.64	17.64	17.64	0.50
11ac VHT20	165	5825	17.64	17.61	17.67	17.67	17.67	0.50
11ac VHT40	151	5755	36.30	36.48	36.06	36.00	36.48	0.50
11ac VHT40	159	5795	36.42	35.70	35.70	35.76	36.48	0.50
11ac VHT80	155	5775	75.84	75.60	75.72	75.72	75.72	0.50
11ax HE20	149	5745	18.96	19.08	18.84	19.02	19.02	0.50
11ax HE20	157	5785	18.75	19.11	18.99	19.02	19.02	0.50
11ax HE20	165	5825	18.81	19.11	18.78	18.96	19.02	0.50
11ax HE40	151	5755	37.92	38.04	37.68	37.68	37.80	0.50
11ax HE40	159	5795	36.66	37.20	37.80	36.42	37.80	0.50
11ax HE80	155	5775	75.60	75.72	77.16	75.36	75.60	0.50

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)				
			ANT A	ANT B	ANT C	ANT D	ANT E
11ac VHT20	149	5745	18.29	18.37	18.21	18.29	18.26
11ac VHT20	157	5785	18.42	18.34	18.18	18.09	18.34
11ac VHT20	165	5825	17.91	17.99	17.95	17.96	17.90
11ac VHT40	151	5755	37.37	37.17	37.27	37.08	37.06
11ac VHT40	159	5795	36.97	36.87	36.34	36.81	37.47
11ac VHT80	155	5775	76.16	75.99	76.02	76.15	76.11
11ax HE20	149	5745	19.22	19.12	19.10	19.12	19.09
11ax HE20	157	5785	19.13	19.08	19.12	19.12	19.12
11ax HE20	165	5825	19.23	19.09	19.07	19.12	19.12
11ax HE40	151	5755	38.05	38.10	38.01	38.00	38.08
11ax HE40	159	5795	38.00	38.13	38.10	37.99	38.17
11ax HE80	155	5775	76.82	76.72	76.74	76.86	76.77



Beamforming

UNII Emission Bandwidth Result (Extends across 5725MHz band)							
Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth(MHz)				
			ANT A	ANT B	ANT C	ANT D	ANT E
11ac VHT20	MCS0-NSS1	5720	3.86	3.85	3.82	3.78	3.84
11ac VHT40	MCS0-NSS1	5710	3.20	3.14	3.18	3.23	3.18
11ac VHT80	MCS0-NSS1	5690	3.23	3.25	3.24	3.17	3.18
11ax HE20	MCS0-NSS1	5720	4.52	4.49	4.46	4.40	4.55
11ax HE40	MCS0-NSS1	5710	3.92	3.99	4.03	4.01	4.02
11ax HE80	MCS0-NSS1	5690	3.70	3.74	3.90	3.14	3.72

UNII Emission Bandwidth Result (Extends across 5725MHz band)							
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)				
			ANT A	ANT B	ANT C	ANT D	ANT E
11ac VHT20	MCS0-NSS1	5720	5.39	5.36	5.31	5.35	5.42
11ac VHT40	MCS0-NSS1	5710	5.24	5.08	5.01	5.12	5.12
11ac VHT80	MCS0-NSS1	5690	7.21	6.93	6.78	7.60	7.36
11ax HE20	MCS0-NSS1	5720	5.22	5.09	5.06	5.12	5.44
11ax HE40	MCS0-NSS1	5710	5.95	5.64	5.39	5.50	5.64
11ax HE80	MCS0-NSS1	5690	5.39	4.90	5.11	7.63	5.50



6dB Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157



CH157



CH165



CH165





6dB Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





6dB Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





6dB Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155





6dB Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157

CH157



CH165

CH165





6dB Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





6dB Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





6dB Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155





6dB Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157



CH157



CH165



CH165





6dB Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





6dB Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





6dB Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155





6dB Bandwidth
Non-Beamforming, ANT D
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157



CH157



CH165



CH165





6dB Bandwidth
Non-Beamforming, ANT D
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





6dB Bandwidth
Non-Beamforming, ANT D
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





6dB Bandwidth
Non-Beamforming, ANT D
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155





6dB Bandwidth
Non-Beamforming, ANT E
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157



CH157



CH165



CH165





6dB Bandwidth
Non-Beamforming, ANT E
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





6dB Bandwidth
Non-Beamforming, ANT E
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





6dB Bandwidth
Non-Beamforming, ANT E
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155





6dB Bandwidth
Non-Beamforming, ANT A
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11a (6Mbps)
CH144

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH138



Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH144

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH144



Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH142


Modulation Type: 802.11ax HE40 (14.6Mbps)
CH142





6dB Bandwidth
Non-Beamforming, ANT B
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11a (6Mbps)
CH144

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH138

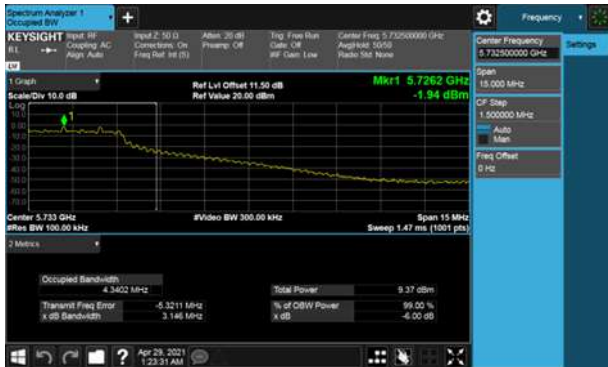

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH144

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH144



Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH142

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH142






6dB Bandwidth
Non-Beamforming, ANT B
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH138





6dB Bandwidth
Non-Beamforming, ANT C
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11a (6Mbps)
CH144

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH138

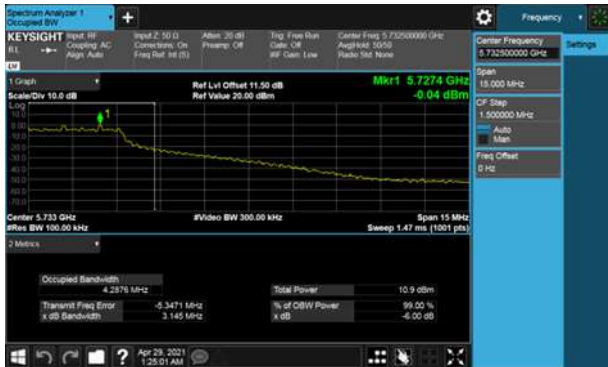

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH144

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH144



Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH142

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH142





6dB Bandwidth
Non-Beamforming, ANT C
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH138





6dB Bandwidth
 Non-Beamforming, ANT D
 Extends across 5725MHz Band, Straddle Channel
 Modulation Type: 802.11a (6Mbps)
 CH144

Modulation Type: 802.11ac VHT80 (29.3Mbps)
 CH138



Modulation Type: 802.11ac VHT20 (6.5Mbps)
 CH144

Modulation Type: 802.11ax HE20 (7.3Mbps)
 CH144



Modulation Type: 802.11ac VHT40 (13.5Mbps)
 CH142

Modulation Type: 802.11ax HE40 (14.6Mbps)
 CH142






6dB Bandwidth
Non-Beamforming, ANT D
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH138





6dB Bandwidth
Non-Beamforming, ANT E
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11a (6Mbps)
CH144

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH138

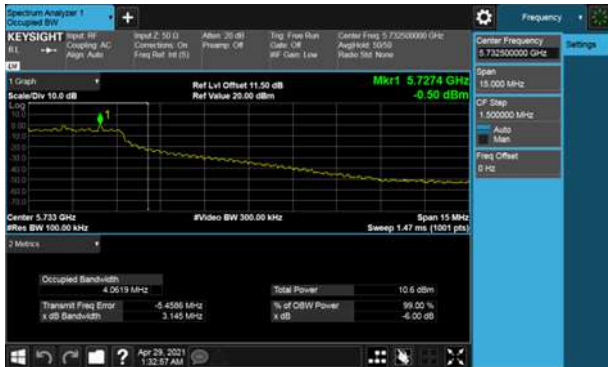

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH144

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH144



Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH142

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH142





6dB Bandwidth
Non-Beamforming, ANT E
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH138





99% Occupied Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157

CH157



CH165

CH165





99% Occupied Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





99% Occupied Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





99% Occupied Bandwidth
Non-Beamforming, ANT A
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155





99% Occupied Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157

CH157



CH165

CH165





99% Occupied Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





99% Occupied Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





99% Occupied Bandwidth
Non-Beamforming, ANT B
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155





99% Occupied Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH149



CH157

CH157



CH165

CH165





99% Occupied Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH155



CH159





99% Occupied Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

Modulation Type: 802.11ax HE40(14.6Mbps)
CH151



CH157



CH159



CH165





99% Occupied Bandwidth
Non-Beamforming, ANT C
Modulation Type: 802.11ax HE80(30.6Mbps)
CH155

