

APPLICATION FOR CERTIFICATION

On Behalf of
Continental Conair Limited

2.4G Cordless Phone w/radio

Model Number: GH3062

Prepared for : Continental Conair Limited
35/F., Standard Chartered Tower, Millennium City,
388 Kwun Tong Road, Kwun Tong, Kowloon, Hong Kong

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F04095
Date of Test : Apr.04~15, 2004
Date of Report : Apr.23, 2004

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Tested Supporting System Details	1-1
1.3. Channel Frequencies	1-2
1.4. Test Facility	1-9
1.5. Test Uncertainty	1-9
2. POWER LINE CONDUCTED EMISSION TEST	2-1
2.1. Test Equipment.....	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Test Limits	2-1
2.4. Configuration of EUT on Test	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results	2-3
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit	3-2
3.4. EUT Configuration on Test.....	3-3
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. PHOTOGRAPH.....	4-1
4.1. Photo of Power Line Conducted Emission Test.....	4-1
4.2. Photos of Radiated Emission Test (In Anechoic Chamber).....	4-2
 APPENDIX I	 (13 pages)
APPENDIX II	(43 pages)

TEST REPORT DECLARATION

Applicant : Continental Conair Limited
 Manufacturer : Telefield Ltd.
 EUT Description : 2.4G Cordless Phone w/radio
 (A) MODEL NO. : GH3062
 (B) SERIAL NO. : F2004042301
 (C) Power Supply : DC 10V Adaptor AC120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C August , 2003.

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test : Apr.04~15, 2004

Prepared by :


Elsa Wu

Elsa Wu / Assistant

Reviewer :

Lake Wang

Lake Wang / Supervisor

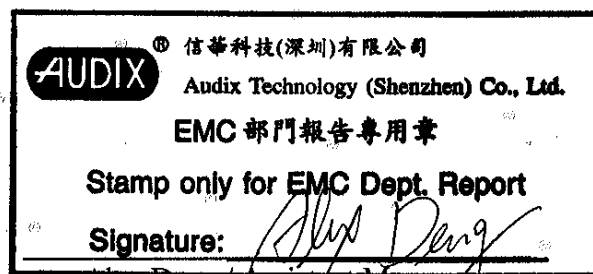

Approved & Authorized Signer :

Alex Deng / Assistant Manager

Name of the Representative of the Responsible Party :

Signature :

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	2.4G Cordless Phone w/radio
Model Number	:	GH3062
Applicant	:	Continental Conair Limited 35/F., Standard Chartered Tower, Millennium City, 388 Kwun Tong Road, Kwun Tong, Kowloon, Hong Kong
Manufacturer	:	Telefield Ltd. Flat D, 2/F., Valiant Industrial Centre, 2-12 Au Pui Wan Street, Fo Tan, N.T., Hong Kong
Date of Test	:	Apr.04~15, 2004

1.2. Tested Supporting System Details

1.2.1. Power Adaptor

Manufacturer	:	Southwestern Bell Freedom Phone
Model Number	:	KEC-41-10D-5
Cable Line	:	Unshielded, Undetachable, 2.0m

1.2.2. Headphone

Model Number	:	SH-6BB
--------------	---	--------

1.3. Channel Frequencies

CH.	BASE TX	HANDSET TX	CH.	BASE TX	HANDSET TX
1	2400.25	2470.00	21	2405.25	2475.00
2	2400.50	2470.25	22	2405.50	2475.25
3	2400.75	2470.50	23	2405.75	2475.50
4	2401.00	2470.75	24	2406.00	2475.75
5	2401.25	2471.00	25	2406.25	2476.00
6	2401.50	2471.25	26	2406.50	2476.25
7	2401.75	2471.50	27	2406.75	2476.50
8	2402.00	2471.75	28	2407.00	2476.75
9	2402.25	2472.00	29	2407.25	2477.00
10	2402.50	2472.25	30	2407.50	2477.25
11	2402.75	2472.50	31	2407.75	2477.50
12	2403.00	2472.75	32	2408.00	2477.75
13	2403.25	2473.00	33	2408.25	2478.00
14	2403.50	2473.25	34	2408.50	2478.25
15	2403.75	2473.50	35	2408.75	2478.50
16	2404.00	2473.75	36	2409.00	2478.75
17	2404.25	2474.00	37	2409.25	2479.00
18	2404.50	2474.25	38	2409.50	2479.25
19	2404.75	2474.50	39	2409.75	2479.50
20	2405.00	2474.75	40	2410.00	2479.75




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 45 File#: C:\EMI TEST DATA\C\Continental.EMI

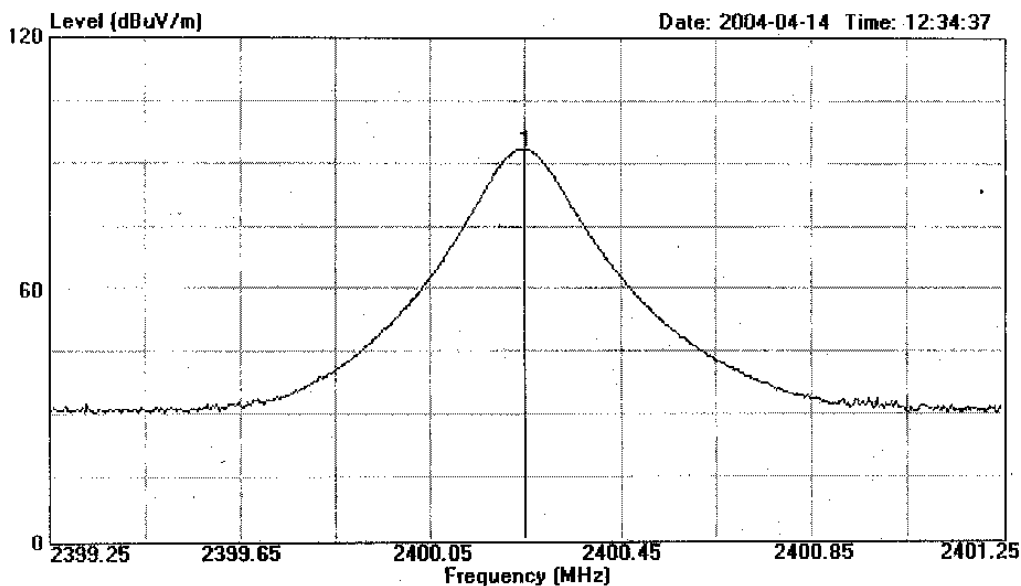

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : HandSet Channel 20

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		Limit	Line	Level	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 2400.250	93.27	-----	-----	62.03	3.20	28.04	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 44 File#: C:\EMI TEST DATA\C\Continental.EMI

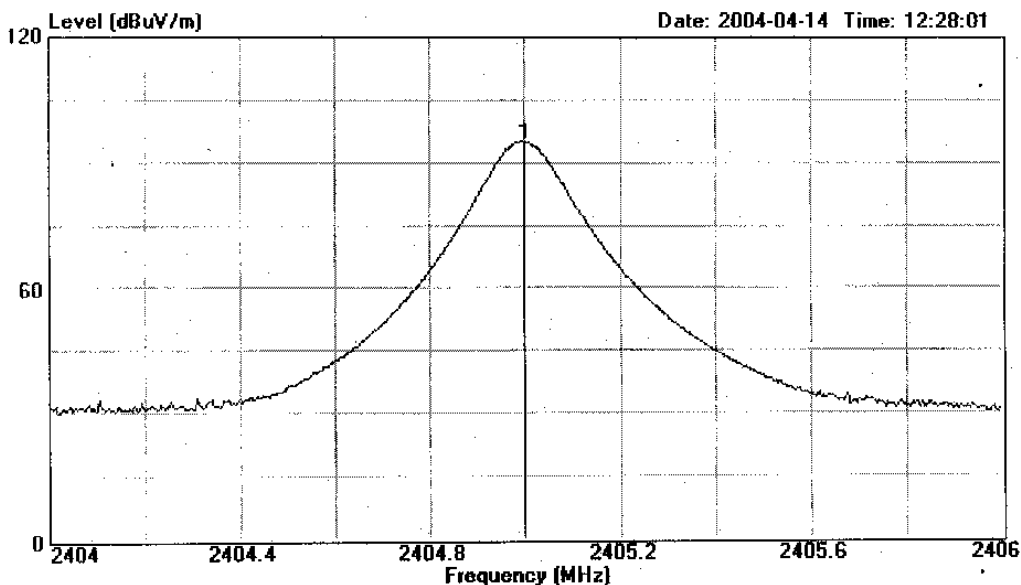

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : HandSet Channel 20

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2405.000	94.95	-----	-----	63.67	3.21	28.07	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 43 File#: C:\EMI TEST DATA\C\Continental.EMI

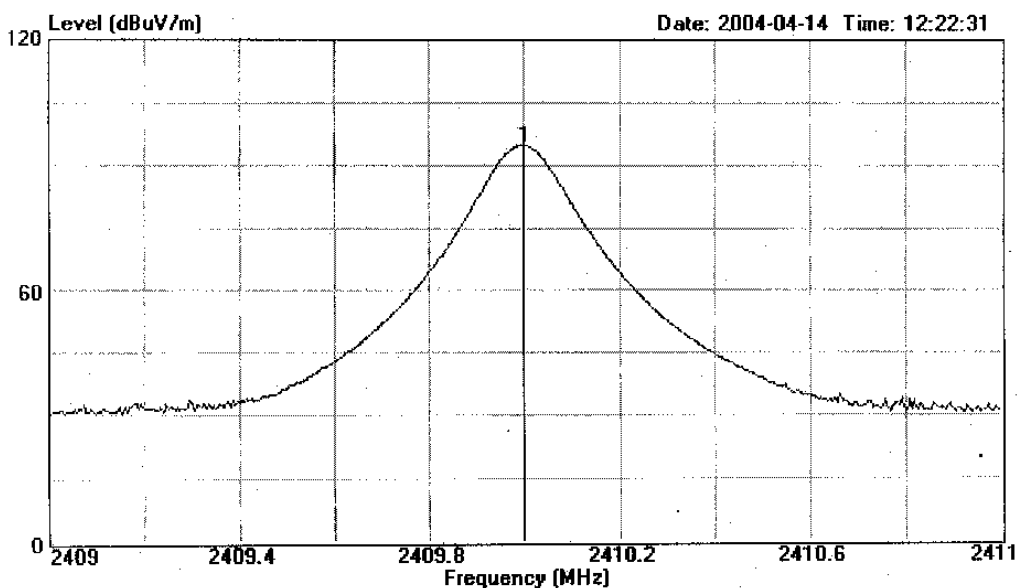

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : HandSet Channel 40

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		Line	Line	Level	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 2410.000	94.75	-----	-----	63.47	3.21	28.07	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 46 File#: C:\EMI TEST DATA\C\Continental.EMI

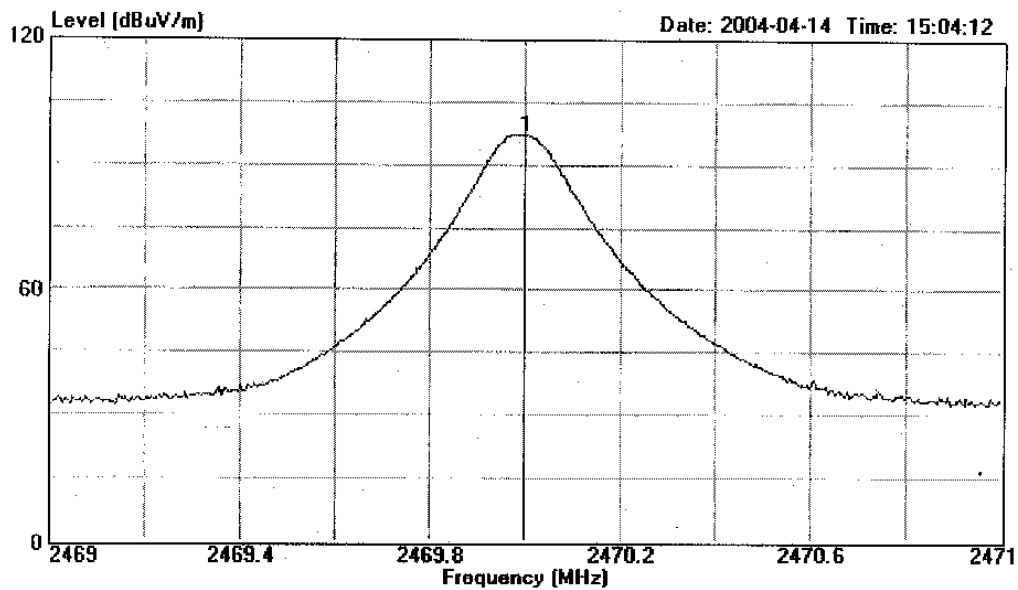

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Saco
Memo : Temp:24' Humi:54%
Memo : Handset Channel 01

Freq	Level	Over Limit		Read		Cable		Probe	Remark
		Limit	Line	Level	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB			
1 2470.000	97.25	-----	-----	65.61	3.25	28.19		Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 47 File#: C:\EMI TEST DATA\C\Continental.EMI

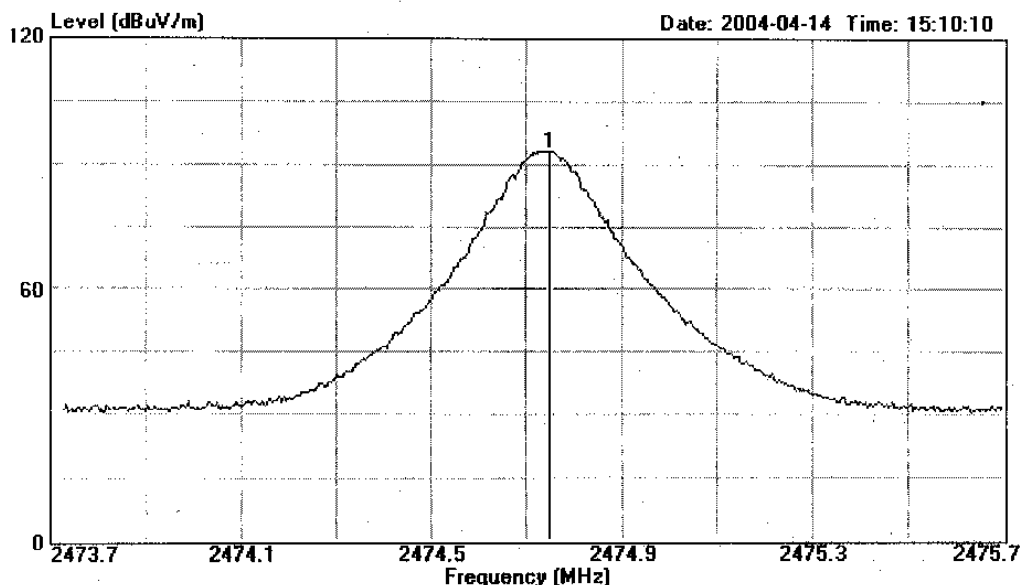

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Handset Channel 20

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2474.750	93.06	-----	-----	61.60	3.26	28.20	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 5, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 48 File#: C:\EMI TEST DATA\C\Continental.EMI

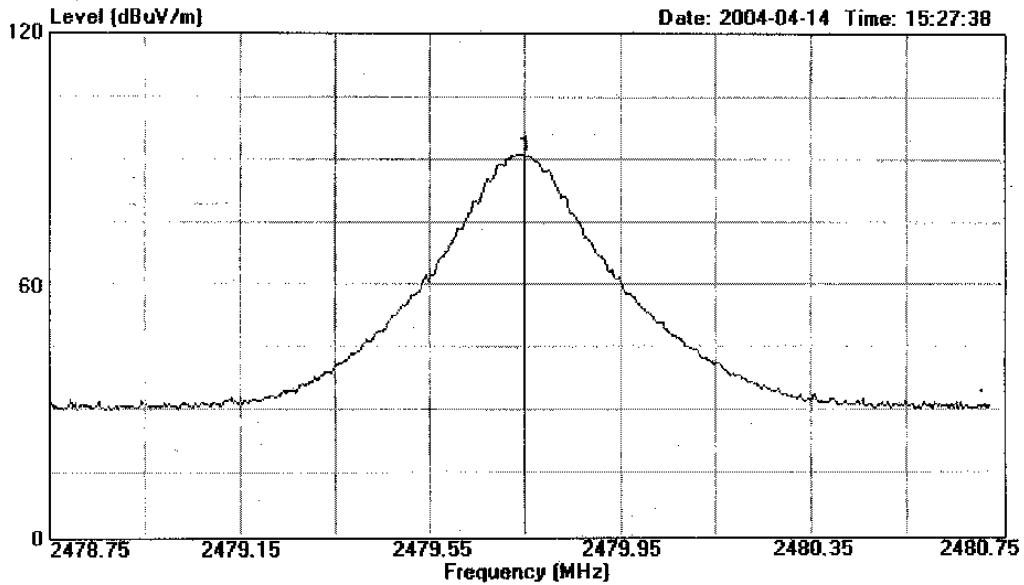

Site : 1# Chamber
Condition : 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Handset Channel 40

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		Line	Line	Level	Loss	Factor	
MHz	dBuV/m		dB	dBuV/m	dB	dB	
1 2479.750	90.94	-----	-----	59.48	3.26	28.20	Peak

1.4. Test Facility

Site Description

3m Anechoic Chamber : Certificated by FCC, USA
Aug. 15, 2003

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Mar. 15, 2004

EMC Lab. : Certificated by DATech, German
Feb. 02, 2004

Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2004

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.5. Test Uncertainty

Conducted Emission Uncertainty = $\pm 2.66\text{dB}$

Radiated Emission Uncertainty = $\pm 4.26\text{dB}$

2. POWER LINE CONDUCTED EMISSION TEST


2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May.31, 03	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	May.31, 03	1 Year
3.	L.I.S.N.#2	Kyoritsu	KNW-407	8-541-4	May.31, 03	1 Year
4.	Terminator	EMCO	50Ω	No. 1	May.31, 03	1 Year
5.	Terminator	EMCO	50Ω	No. 2	May.31, 03	1 Year
6.	RF Cable	MIYAZAKI	5D-2W	LISN Cable	Feb. 20, 04	1/2 Year
7.	Passive Probe	Rohde & Schwarz	ESH2-Z3	299.7810.52	May.31, 03	1 Year
8.	Coaxial Switch	Anritsu	MP59B	M55367	Nov.30, 03	1/2 Year
9.	PC	N/A	586ATXS	N/A	N/A	N/A
10.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

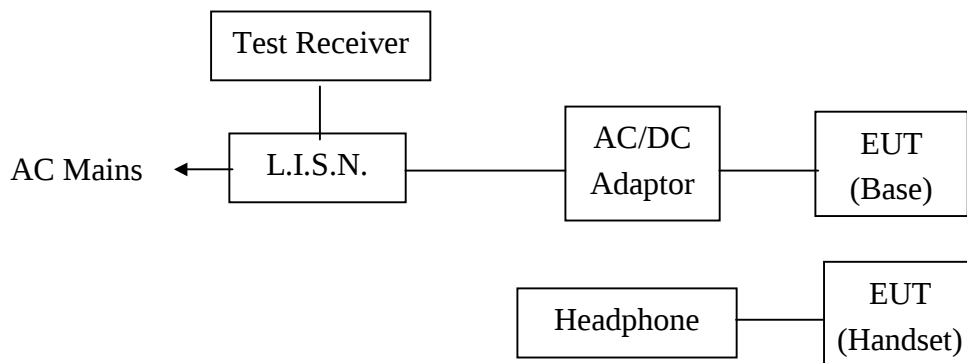

(EUT: 2.4G Cordless Phone w/radio)

2.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. 2.4G Cordless Phone w/radio (EUT)

Model Number : GH3062
Serial Number : F2004042301
Manufacturer : Telefield Ltd.

2.4.2. Support Equipment : As Tested Supporting System Detail, in Section 1.2..

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown as Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (Base Channel 01/Base Channel 20/
Base Channel 40/FM 88MHz/FM 98MHz/FM 108MHz) and test it.

2.6. Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Power on the EUT and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2001 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7., all the scanning waveforms for Conducted Emission Test are attached in Appendix I.

2.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test	:	Apr.15, 2004	Temperature	:	23°C
EUT	:	2.4G Cordless Phone w/radio	Humidity	:	54%
Model No.	:	GH3062	Test Mode	:	FM 108MHz
Test Engineer	:	Seco			

Frequency (MHz)	Reading (dBμV)				Limit (dBμV)	
	VA		VB			
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.159	33.36	27.36	35.38	29.38	65.52	55.52
0.191	26.15	20.15	27.15	22.15	63.99	53.99
0.282	16.52	12.52	17.52	14.52	60.76	50.76
0.385	6.41	4.41	7.40	5.40	58.17	48.17
1.840	4.05	2.05	5.06	3.06	56.00	46.00
21.490	7.62	3.62	4.60	2.60	60.00	50.00

*** As the QP value is too low against AV limit, So AV Value had been omitted.

Reviewer:

Chen Wang

3. RADIATED EMISSION TEST

3.1. Test Equipment


The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Analyzer	HP	8591EM	3628A00914	May.31, 03	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May.31, 03	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.17, 04	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 13, 04	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Feb.01, 04	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Feb.01, 04	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Feb.01, 04	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Feb.01, 04	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	Nov.28, 03	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

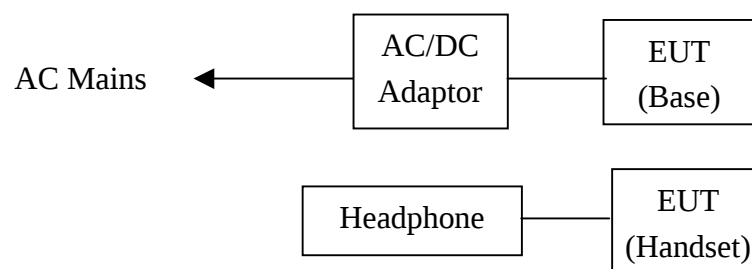

(EUT: 2.4G Cordless Phone w/radio)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

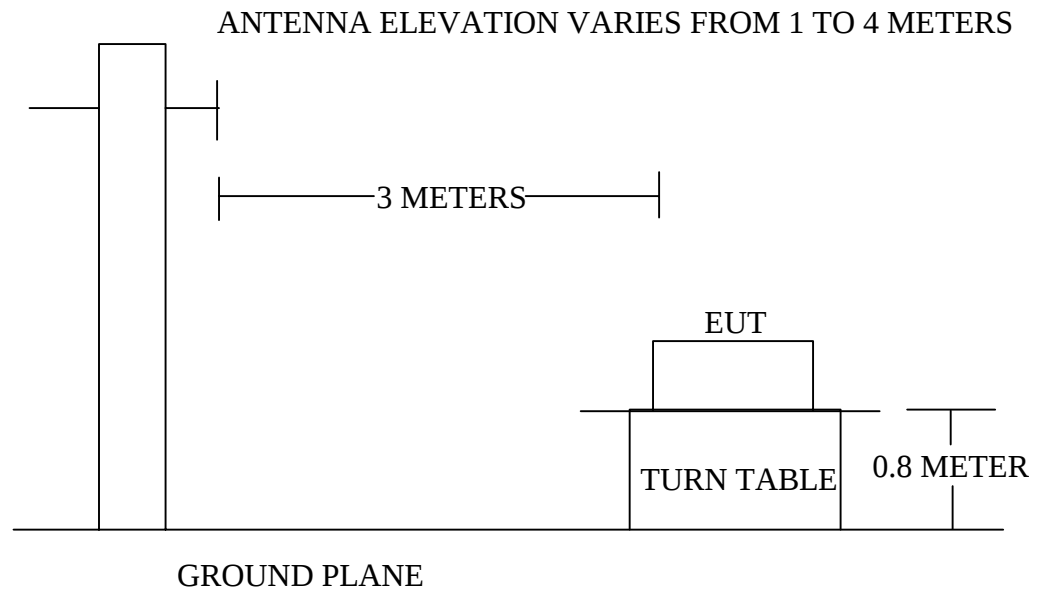

3.3. Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Local Oscillator: 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. 2.4G Cordless Phone w/radio (EUT)

Model Number	:	GH3062
Serial Number	:	F2004042301
Manufacturer	:	Telefield Ltd.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (Base Channel 01/Base Channel 20/
Base Channel 40/FM 88MHz/FM 98MHz/FM 108MHz/Handset CH01/
Handset CH20/Handset CH40) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2001 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

3.6.1. The test modes (Base Channel 01/Base Channel 20/Base Channel 40/
FM 88MHz/FM 98MHz/FM 108MHz/Handset CH01/Handset CH20/
Handset CH40) is tested in Anechoic Chamber and all the scanning
waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	Apr.14, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	54%
Model No. :	GH3062	Test Mode :	Base Channel 40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
43.280	11.88	1.24	10.58	23.70	-16.30	40.00
95.300	8.55	1.99	22.49	33.03	-10.47	43.50
145.130	12.00	2.48	10.32	24.80	-18.70	43.50
375.440	15.96	4.36	6.30	26.61	-19.39	46.00
802.213	21.56	7.12	12.21	40.88	-5.12	46.00
822.490	21.76	7.12	8.56	37.45	-8.55	46.00

- Remark: 1. All readings are Quasi-Peak values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The worst emission was detected at 802.213MHz with corrected signal level of 40.88dBμV/m(Limit is 46.00dBμV/m) when the antenna was at horizontal polarization and at 1.9m high and the turn table was at 300 ° .
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:

Caife Wang

Date of Test :	Apr.14, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	54%
Model No. :	GH3062	Test Mode :	Base Channel 40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
53.280	6.90	1.44	15.35	23.70	-16.30	40.00
95.300	9.72	2.01	22.30	34.03	-9.47	43.50
155.130	10.27	2.62	11.91	24.80	-18.70	43.50
371.440	15.01	4.37	7.23	26.61	-19.39	46.00
802.213	21.17	7.04	13.67	41.88	-4.12	46.00
822.490	22.26	7.12	8.07	37.45	-8.55	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 802.213MHz with corrected signal level of 41.88dBμV/m (Limit is 46.00dBμV/m) when the antenna was at vertical polarization and at 1.0m high and the turn table was at 0 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:


Cake Wang

Date of Test :	<u>Apr.14, 2004</u>	Temperature :	<u>24°C</u>
EUT :	<u>2.4G Cordless Phone w/radio</u>	Humidity :	<u>54%</u>
Model No. :	<u>GH3062</u>	Test Mode :	<u>FM 108MHz</u>
Test Engineer:	<u>Seco</u>		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
30.000	16.74	1.05	6.10	23.89	-16.12	40.00
117.700	10.97	2.23	25.96	39.16	-4.34	43.50
182.290	9.56	2.80	21.03	33.39	-10.11	43.50
300.630	13.36	3.86	10.34	27.56	-18.44	46.00
354.950	15.61	4.22	8.69	28.52	-17.48	46.00
819.580	21.76	6.93	8.60	37.29	-8.71	46.00

- Remark: 1. All readings are Quasi-Peak values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The worst emission was detected at 117.700MHz with corrected signal level of 39.16dBμV/m(Limit is 43.50dBμV/m) when the antenna was at horizontal polarization and at 1.8m high and the turn table was at 312 ° .
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:



Date of Test :	Apr.14, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	54%
Model No. :	GH3062	Test Mode :	FM 108MHz
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
31.940	13.50	1.08	7.53	22.12	-17.88	40.00
58.130	5.59	1.48	14.43	21.50	-18.50	40.00
118.700	11.18	2.23	25.34	38.75	-4.75	43.50
435.460	16.86	4.93	6.71	28.50	-17.50	46.00
626.550	19.62	6.17	3.41	29.20	-16.80	46.00
820.550	22.06	7.05	7.26	36.37	-9.63	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 118.700MHz with corrected signal level of 38.75dBμV/m (Limit is 43.50dBμV/m) when the antenna was at vertical polarization and at 1.1m high and the turn table was at 0°.

4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer:



Date of Test :	Apr.04, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	54%
Model No. :	GH3062	Test Mode :	Handset CH40
Test Engineer:	Seco		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits
MHz	Factor	Loss	Horizontal	Horizontal	Limits	
	dB/m	dB	dBμV	dBμV/m	dB	dBμV/m
36.600	13.40	1.20	8.90	23.50	-16.50	40.00
79.850	7.48	1.77	11.20	20.45	-19.55	40.00
146.900	12.02	2.50	10.30	24.82	-18.68	43.50
239.800	11.47	3.32	9.60	24.39	-21.61	46.00
799.771	21.54	7.04	11.20	39.79	-6.21	46.00
826.583	21.70	7.35	13.30	42.35	-3.65	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 826.583MHz with corrected signal level of 42.35dBμV/m (Limit is 46.00dBμV/m) when the antenna was at horizontal polarization and at 1.6m high and the turn table was at 0°.

4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer:

Cake Wang

Date of Test :	Apr.04, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	54%
Model No. :	GH3062	Test Mode :	Handset CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
35.600	11.59	1.18	9.30	22.07	-17.93	40.00
82.900	8.18	1.82	9.60	19.61	-20.39	40.00
169.360	8.66	2.70	11.20	22.56	-20.94	43.50
236.800	12.16	3.30	7.20	22.66	-23.34	46.00
799.775	21.17	7.04	13.60	41.81	-4.19	46.00
826.583	22.51	7.35	12.60	42.46	-3.54	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 826.583MHz with corrected signal level of 42.46dBμV/m (Limit is 46.00dBμV/m) when the antenna was at vertical polarization and at 1.1m high and the turn table was at 180 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:


Chae Wang

Date of Test :	<u>Apr.14, 2004</u>	Temperature :	<u>24°C</u>
EUT :	<u>2.4G Cordless Phone w/radio</u>	Humidity :	<u>54%</u>
Model No. :	<u>GH3062</u>	Test Mode :	<u>Base Channel 01</u>
Test Engineer:	<u>Seco</u>		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2400.250	28.04	3.20	58.32	89.56	-24.44	114.00	Peak
2400.250	28.04	3.20	34.32	65.56	-28.44	94.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2400.250	28.04	3.20	34.26	65.50	-20.73	114.00	Peak
2400.250	28.04	3.20	62.03	93.27	-28.50	94.00	Average

- Remark: 1. All readings are Peak and Average values.
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer: 

Date of Test :	Apr.14, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	54%
Model No. :	GH3062	Test Mode :	Base Channel 20
Test Engineer:	Seco		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB	dB	dBμV	dBμV/m	dB	dBμV/m	
2405.000	28.07	3.21	59.52	90.80	-23.20	114.00	Peak
2405.000	28.07	3.21	35.62	66.90	-27.10	94.00	Average

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Vertical	Vertical	Limits		
	dB	dB	dBμV	dBμV/m	dB	dBμV/m	
2405.000	28.07	3.21	63.67	94.95	-19.05	114.00	Peak
2405.000	28.07	3.21	35.22	66.50	-27.50	94.00	Average

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer:

Calke Wang

Date of Test :	<u>Apr.14, 2004</u>	Temperature :	<u>24°C</u>
EUT :	<u>2.4G Cordless Phone w/radio</u>	Humidity :	<u>54%</u>
Model No. :	<u>GH3062</u>	Test Mode :	<u>Base Channel 40</u>
Test Engineer:	<u>Seco</u>		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2410.000	28.07	3.21	60.22	91.50	-22.50	114.00	Peak
2410.000	28.07	3.21	36.62	67.90	-26.10	94.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2410.000	28.07	3.21	63.47	94.75	-19.25	114.00	Peak
4820.000	33.03	4.64	8.93	46.60	-27.40	74.00	Peak
2410.000	28.07	3.21	36.92	68.20	-25.80	94.00	Average
4820.000	33.03	4.64	4.23	41.90	-12.10	54.00	Average

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer:

Chae Wang

Date of Test :	Apr.14, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	56%
Model No. :	GH3062	Test Mode :	Handset CH01
Test Engineer:	Seco		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB	dB	dBμV	dBμV/m	dB	dBμV/m	
2470.000	28.17	3.25	50.38	81.80	-32.20	114.00	Peak
2470.000	28.17	3.25	30.38	61.80	-32.20	94.00	Average

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Vertical	Vertical	Limits		
	dB	dB	dBμV	dBμV/m	dB	dBμV/m	
2470.000	28.17	3.25	65.83	97.25	-16.75	114.00	Peak
2470.000	28.17	3.25	32.78	64.20	-29.80	94.00	Average

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer: Cake Wang

Date of Test :	Apr.14, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio	Humidity :	56%
Model No. :	GH3062	Test Mode :	Handset CH20
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2474.750	28.20	3.26	52.44	83.90	-30.10	114.00	Peak
2474.750	28.20	3.26	31.64	63.10	-30.90	94.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m	Remark
2474.750	28.20	3.26	61.60	93.06	-20.94	114.00	Peak
2474.750	28.20	3.26	32.64	64.10	-29.90	94.00	Average

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer:

Cake Wang

Date of Test :	<u>Apr.14, 2004</u>	Temperature :	<u>24°C</u>
EUT :	<u>2.4G Cordless Phone w/radio</u>	Humidity :	<u>56%</u>
Model No. :	<u>GH3062</u>	Test Mode :	<u>Handset CH40</u>
Test Engineer:	<u>Seco</u>		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB	dB	dBμV	dBμV/m	dB	dBμV/m	
2479.750	28.20	3.26	51.48	82.94	-31.06	114.00	Peak
2479.750	28.20	3.26	29.44	60.90	-33.10	94.00	Average

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Vertical	Vertical	Limits		
	dB	dB	dBμV	dBμV/m	dB	dBμV/m	
2479.750	28.20	3.26	59.48	90.94	-23.06	114.00	Peak
2479.750	28.20	3.26	36.84	68.30	-25.70	94.00	Average

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer:

Calke Wang




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 14 File#: Continental.EMI Date: 2004-04-14 Time: 21:42:30

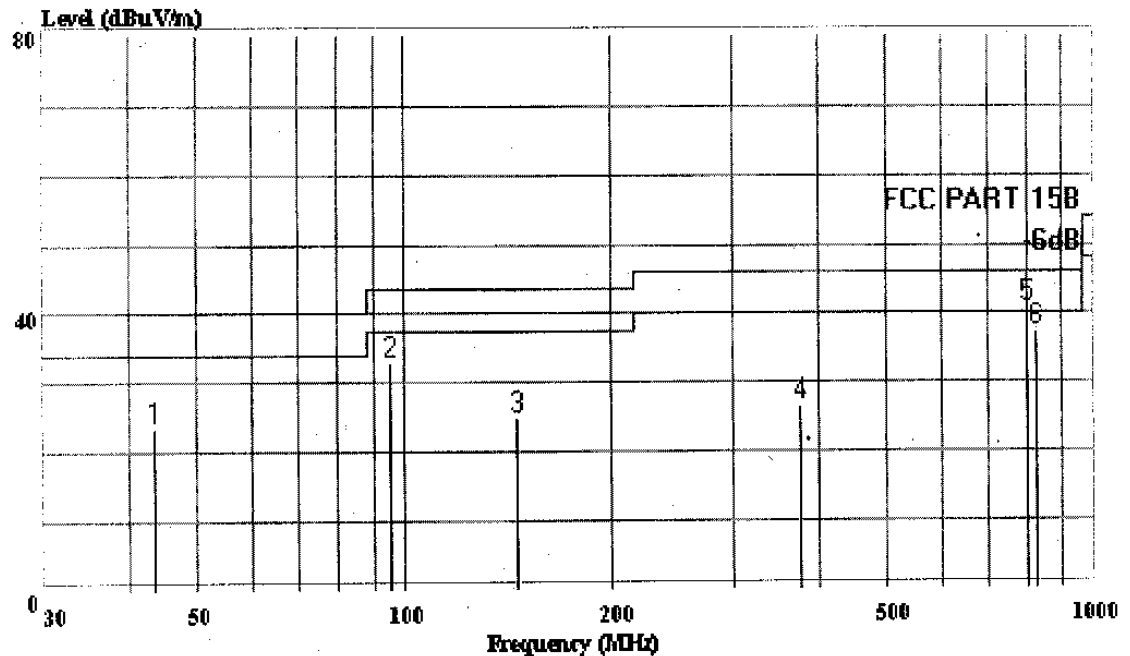

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Base Channel 40

: AntPos:1.9m TablePos:300'

Page: 1

	Freq	Level	Limit	Over	Read	Cable	Probe
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	43.280	23.70	40.00	-16.30	10.58	1.24	11.88
2	95.300	33.03	43.50	-10.47	22.49	1.99	8.55
3	145.130	24.80	43.50	-18.70	10.32	2.48	12.00
4	375.440	26.61	46.00	-19.39	6.30	4.36	15.96
5	802.213	40.88	46.00	-5.12	12.21	7.12	21.56
6	822.490	37.45	46.00	-8.55	8.56	7.12	21.76




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 22 File#: Continental.EMI Date: 2004-04-14 Time: 21:37:30

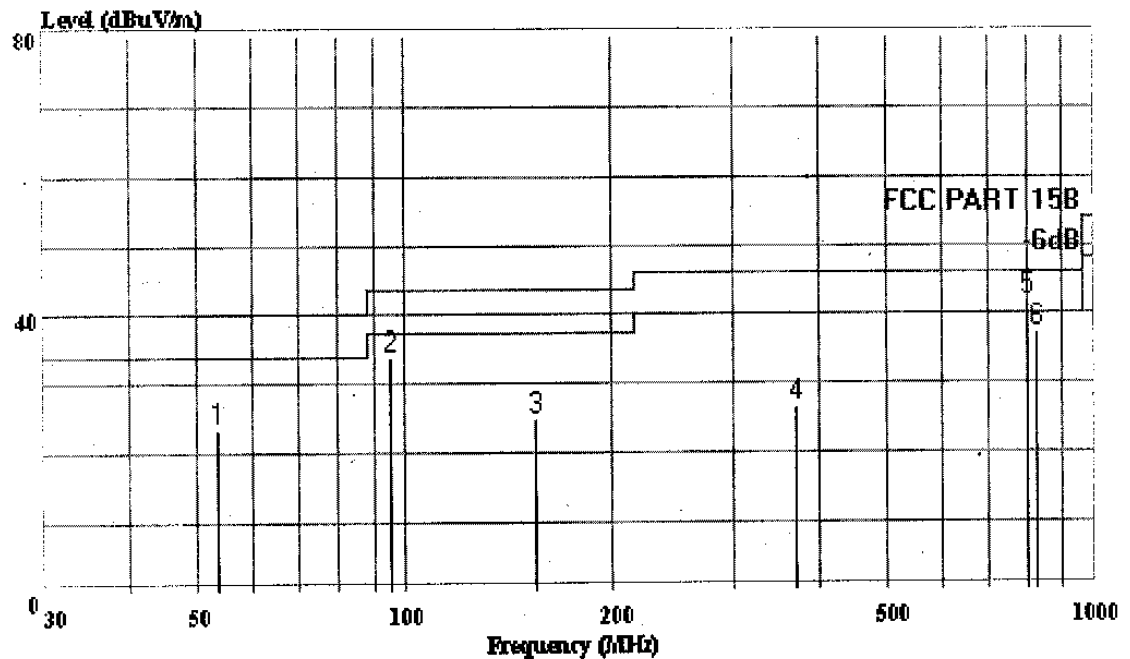

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: -FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Base Channel 40

: AntPos:1.0m TablePos:0'


Page: 1

	Freq	Level	Limit	Over	Read	Cable	Probe
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	53.280	23.70	40.00	-16.30	15.35	1.44	6.90
2	95.300	34.03	43.50	-9.47	22.30	2.01	9.72
3	155.130	24.80	43.50	-18.70	11.91	2.62	10.27
4	371.440	26.61	46.00	-19.39	7.23	4.37	15.01
5	802.213	41.88	46.00	-4.12	13.67	7.04	21.17
6	822.490	37.45	46.00	-8.55	8.07	7.12	22.26



Shenzhen Science & Tnd. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 16 File#: Continental.EMI Date: 2004-04-14 Time: 21:19:52

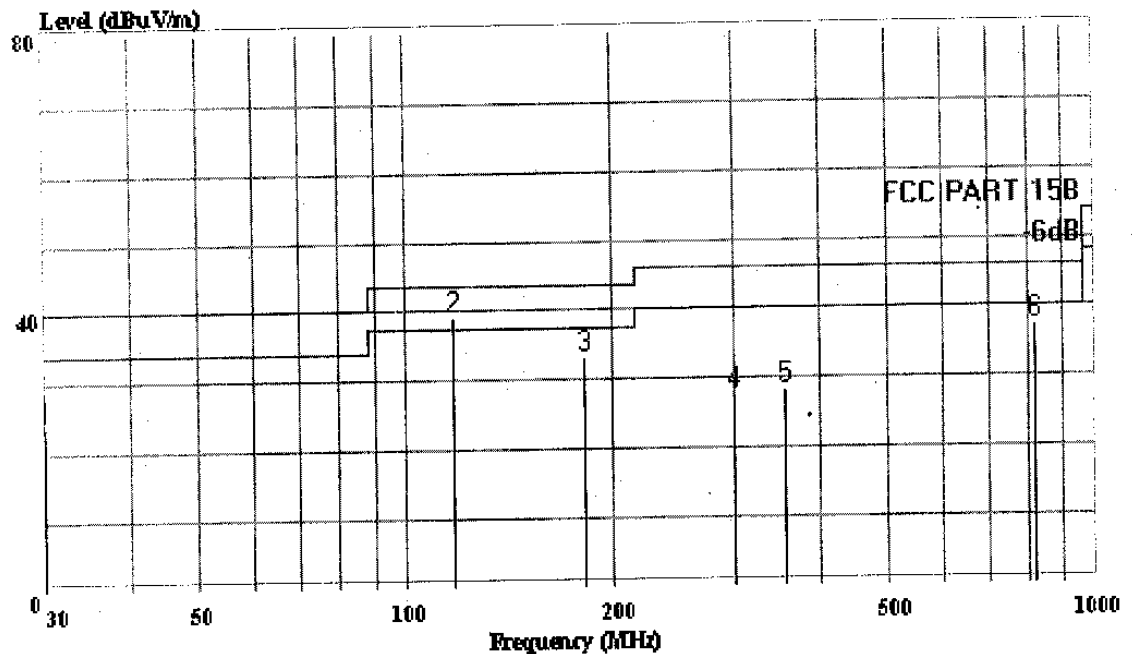

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Engineer: Seco
Memo : Temp:24' Humi:54%
: FM108MHz
: AntPos:1.8m TablePos:312'


Page: 1

	Freq	Level	Limit	Over	Read	Cable	Probe
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	30.000	23.89	40.00	-16.12	6.10	1.05	16.74
2	117.700	39.16	43.50	-4.34	25.96	2.23	10.97
3	182.290	33.39	43.50	-10.11	21.03	2.80	9.56
4	300.630	27.56	46.00	-18.44	10.34	3.86	13.36
5	354.950	28.52	46.00	-17.48	8.69	4.22	15.61
6	819.580	37.29	46.00	-8.71	8.60	6.93	21.76

AUDIX[®]
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 14 File#: Continental.EMI Date: 2004-04-14 Time: 21:16:53

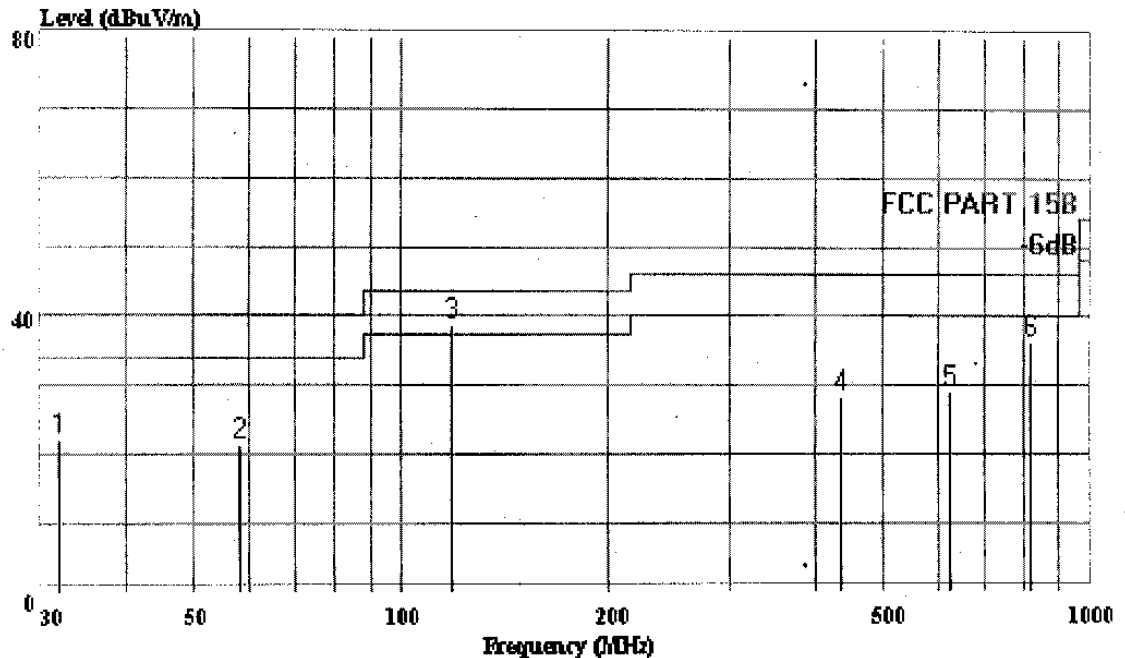

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: FM108MHz

: AntPos:1.1m TablePos:0'

Page: 1

			Limit	Over	Read	Cable	Probe
Freq	Level	Line	Limit	Limit	Level	Loss	Factor
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB
1	31.940	22.12	40.00	-17.88	7.53	1.08	13.50
2	58.130	21.50	40.00	-18.50	14.43	1.48	5.59
3	118.700	38.75	43.50	-4.75	25.34	2.23	11.18
4	435.460	28.50	46.00	-17.50	6.71	4.93	16.86
5	626.550	29.20	46.00	-16.80	3.41	6.17	19.62
6	820.550	36.37	46.00	-9.63	7.26	7.05	22.06




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-04-04 Time: 13:51:40

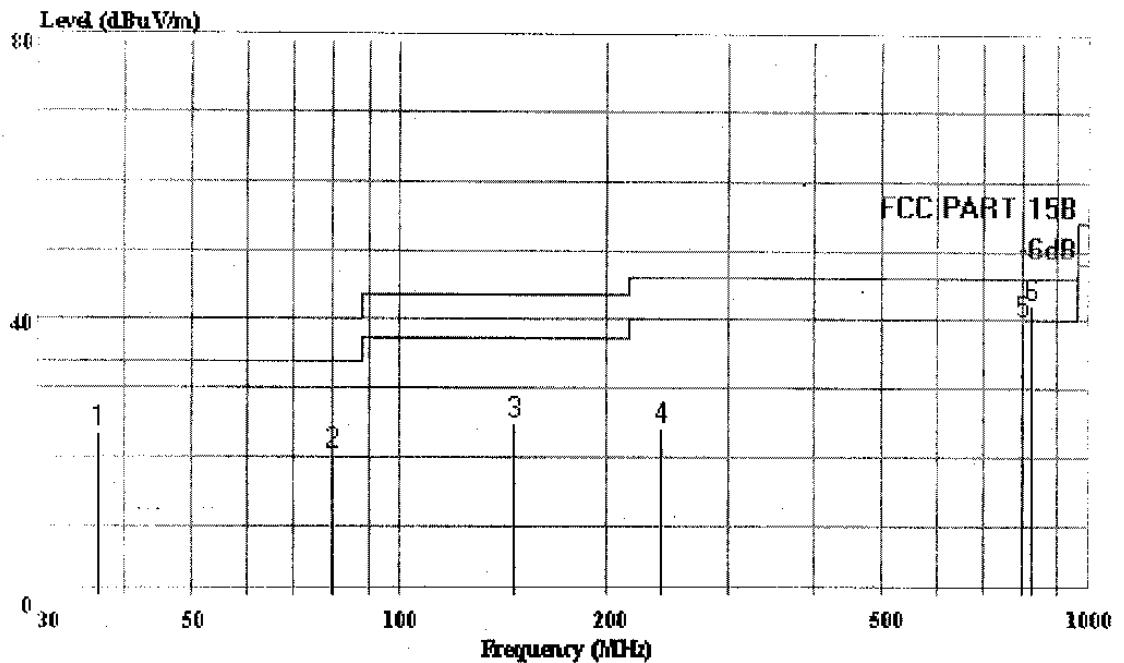

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : DC 3.6V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Handset CH 40

: AntPos:1.6m TablePos:0'

Page: 1

	Freq	Level	Limit	Over	Read	Cable	Probe
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	36.600	23.50	40.00	-16.50	8.90	1.20	13.40
2	79.850	20.45	40.00	-19.55	11.20	1.77	7.48
3	146.900	24.82	43.50	-18.68	10.30	2.50	12.02
4	239.800	24.39	46.00	-21.61	9.60	3.32	11.47
5	799.771	39.79	46.00	-6.21	11.20	7.04	21.54
6	826.583	42.35	46.00	-3.65	13.30	7.35	21.70




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 4 File#: Continental.EMI Date: 2004-04-04 Time: 13:46:34

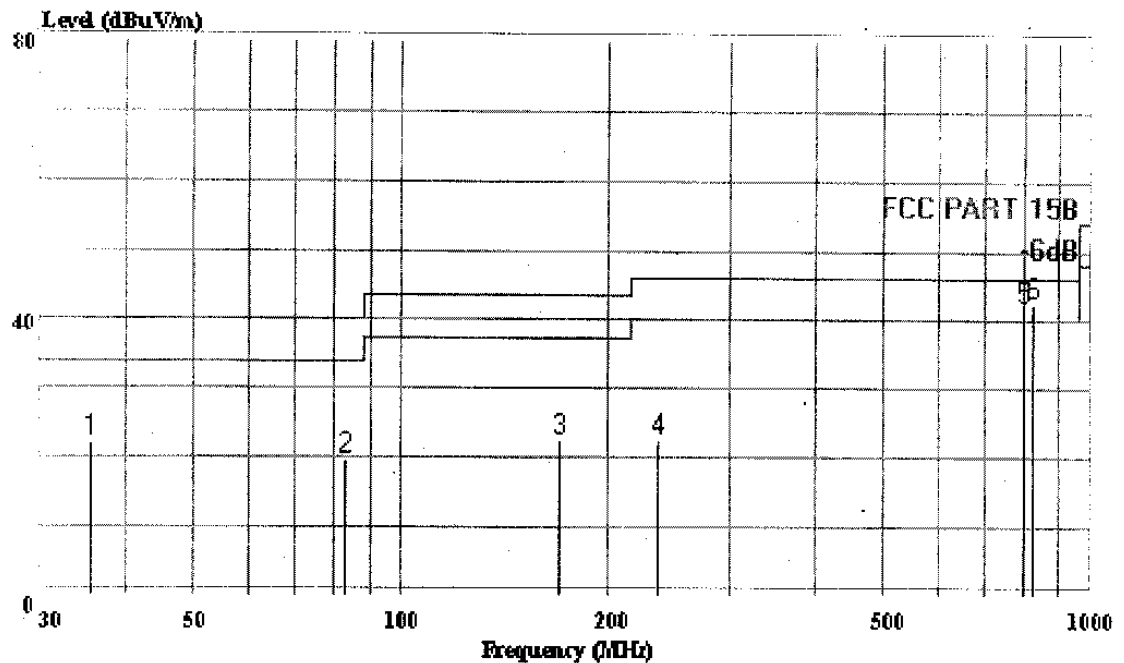

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : DC 3.6V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Handset CH 40

: AntPos:1.1m TablePos:180'

Page: 1

	Freq	Level	Limit	Over	Read	Cable	Probe
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	35.600	22.07	40.00	-17.93	9.30	1.18	11.59
2	82.900	19.61	40.00	-20.39	9.60	1.82	8.18
3	169.360	22.56	43.50	-20.94	11.20	2.70	8.66
4	236.800	22.66	46.00	-23.34	7.20	3.30	12.16
5	799.775	41.81	46.00	-4.19	13.60	7.04	21.17
6	826.583	42.46	46.00	-3.54	12.60	7.35	22.51




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 26 File#: C:\EMI TEST DATA\C\Continental.EMI

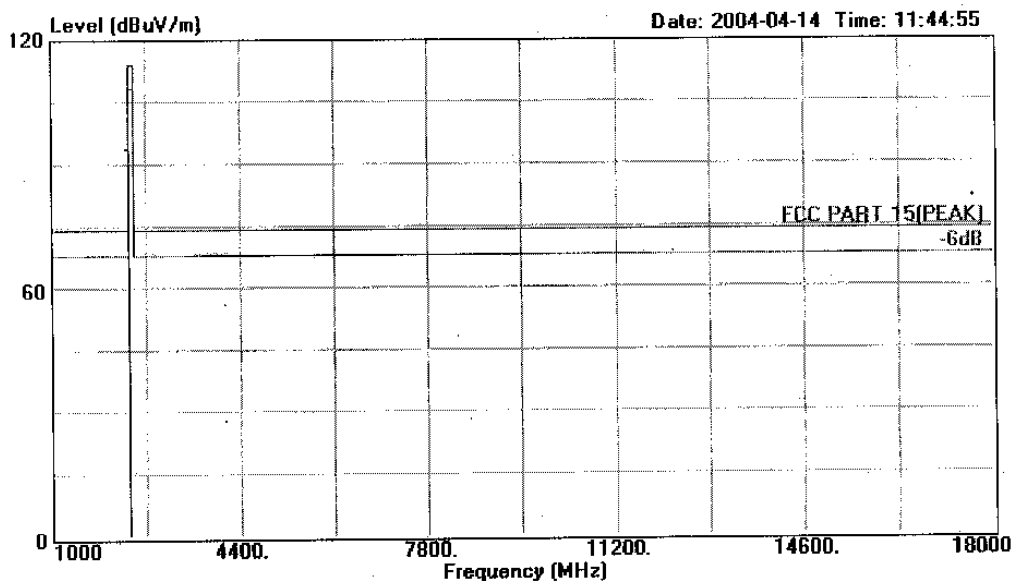

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Base Channel 01

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1	2400.250	89.56	-24.44	114.00	58.32	3.20	28.04	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 27 File#: C:\EMI TEST DATA\C\Continental.EMI

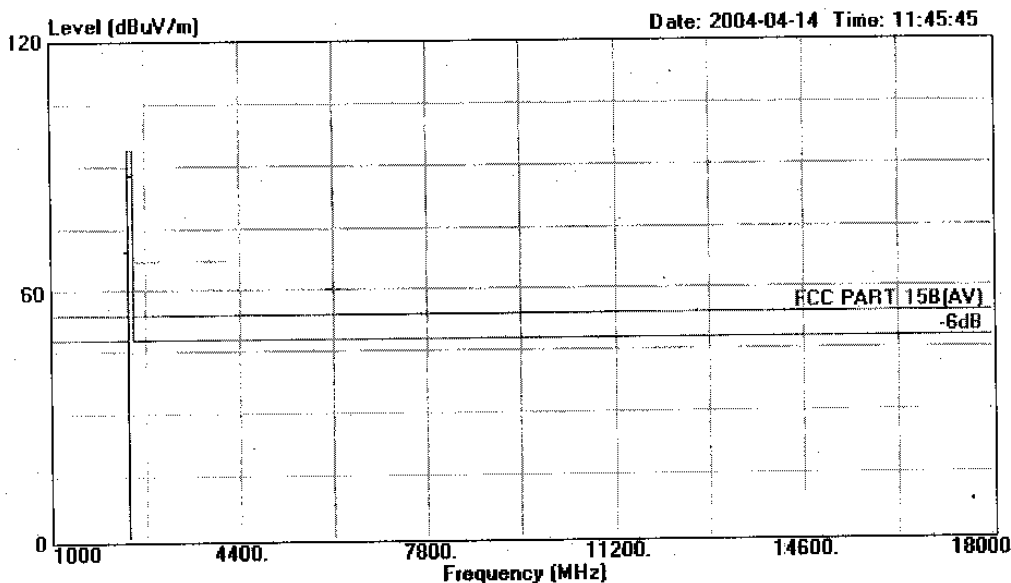

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 01

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2400.250	65.56	-28.44	94.00	34.32	3.20	28.04	Average	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 29 File#: C:\EMI TEST DATA\C\Continental.EMI

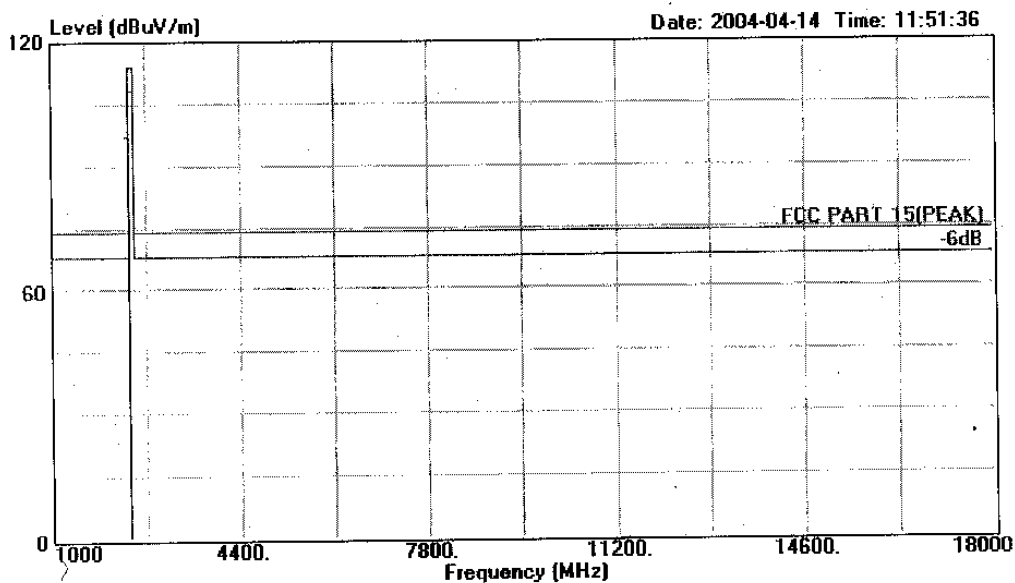

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 01

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2400.250	93.27	-20.73	114.00	62.03	3.20	26.04	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen; Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 30 File#: C:\EMI TEST DATA\C\Continental.EMI

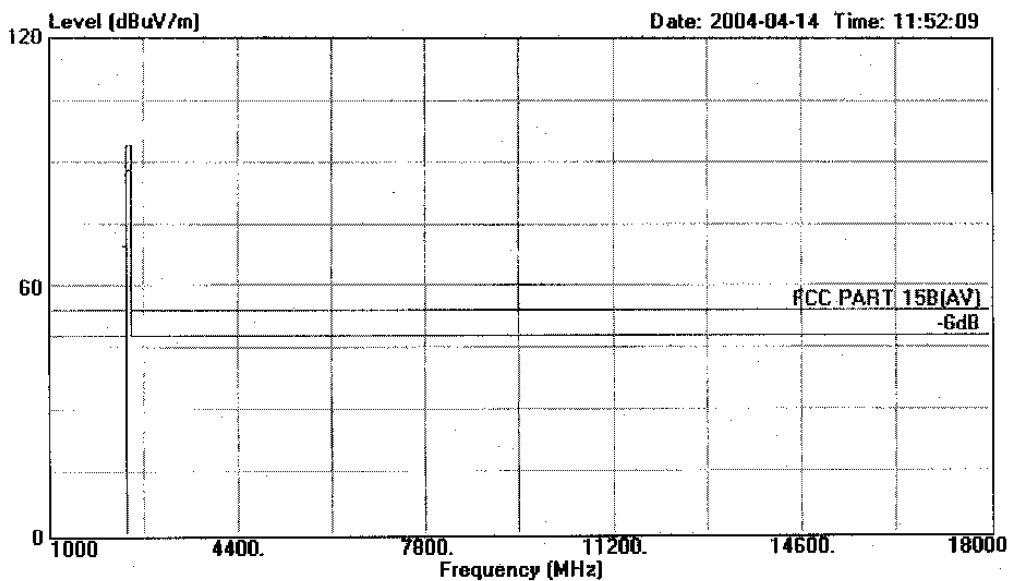

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 01

Freq	Level	Over Limit		Read Level	Cable Loss	Probe Factor	Remark
		Limit	Line				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 2400.250	65.50	-28.50	94.00	34.26	3.20	28.04	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 35 File#: C:\EMI TEST DATA\C\Continental.EMI

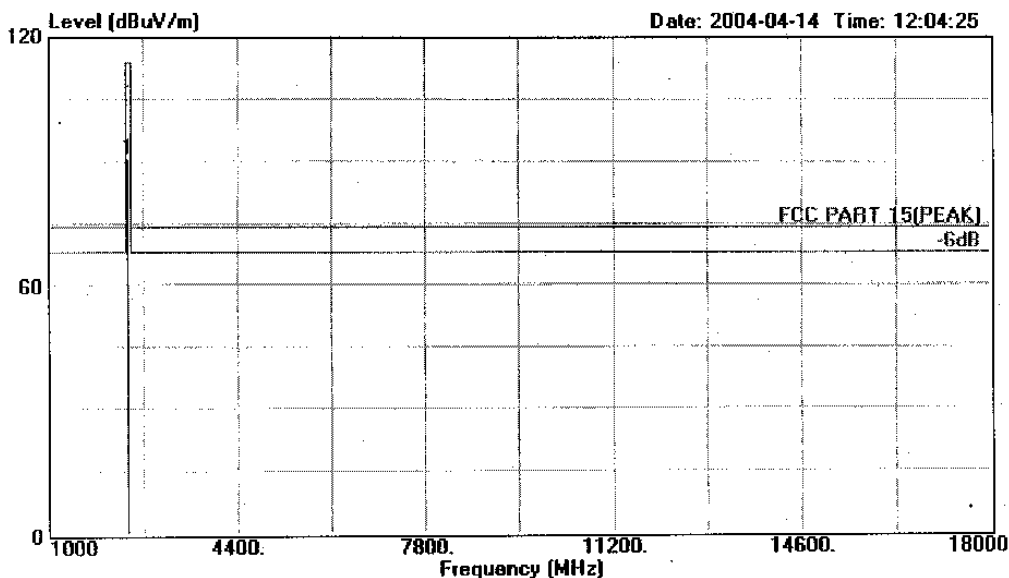

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Saco
Memo : Temp:24° Humi:54%
Memo : Base Channel 20

Freq	Level	Over Limit		Read	Cable		Probe	Remark
		Limit	Line		Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2405.000	90.80	-23.20	114.00	59.52	3.21	28.07	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 36 File#: C:\EMI TEST DATA\C\Continental.EMI

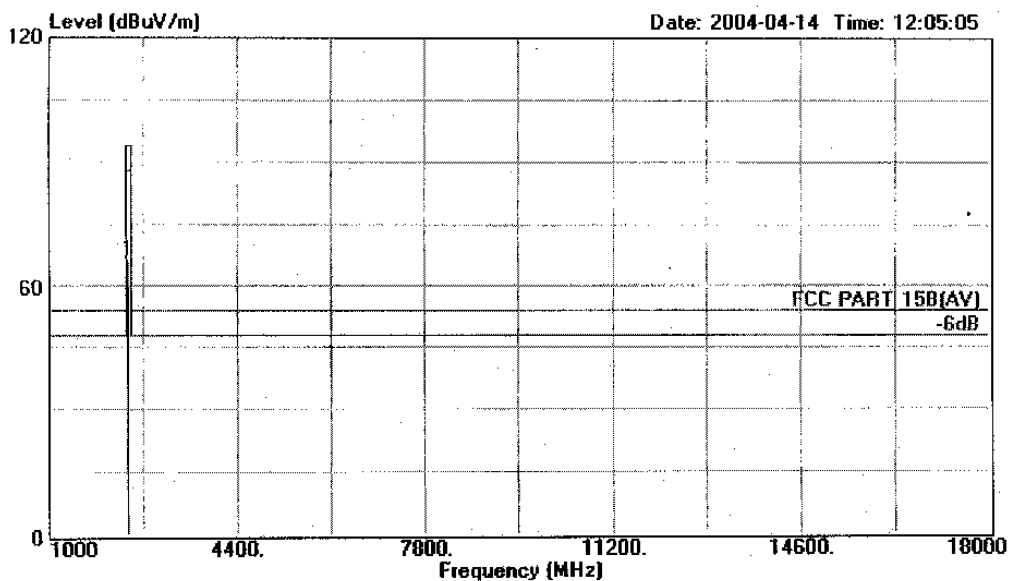

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 20

	Freq	Level	Limit	Over Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2405.000	66.90	-27.10	94.00	35.62	3.21	28.07	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 32 File#: C:\EMI TEST DATA\C\Continental.EMI

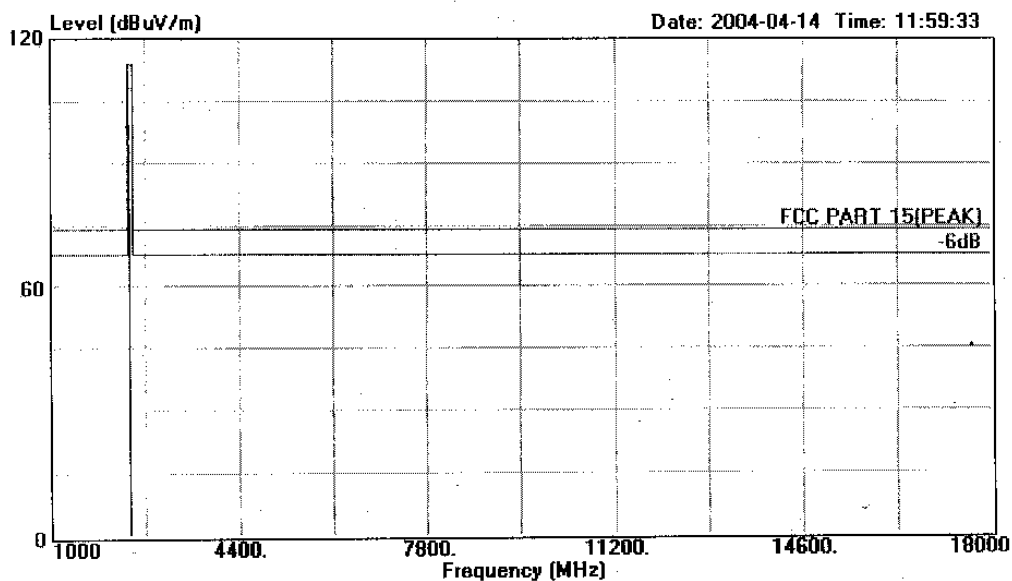

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Base Channel 20

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2405.000	94.95	-19.05	114.00	63.67	3.21	28.07	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 33 File#: C:\EMI TEST DATA\C\Continental.EMI

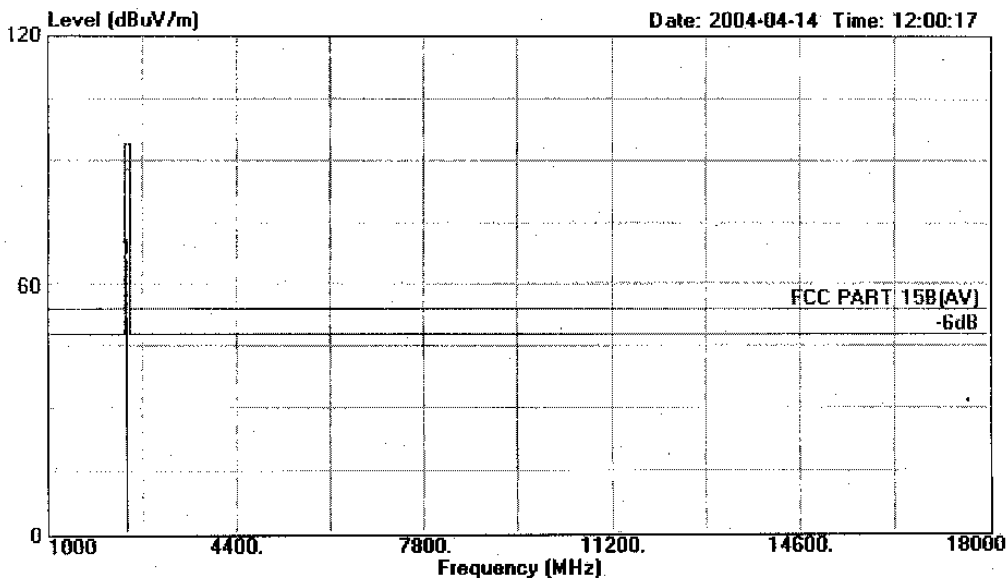

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 20

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1	2405.000	66.50	-27.50	94.00	35.22	3.21	28.07	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 38 File#: C:\EMI TEST DATA\C\Continental.EMI

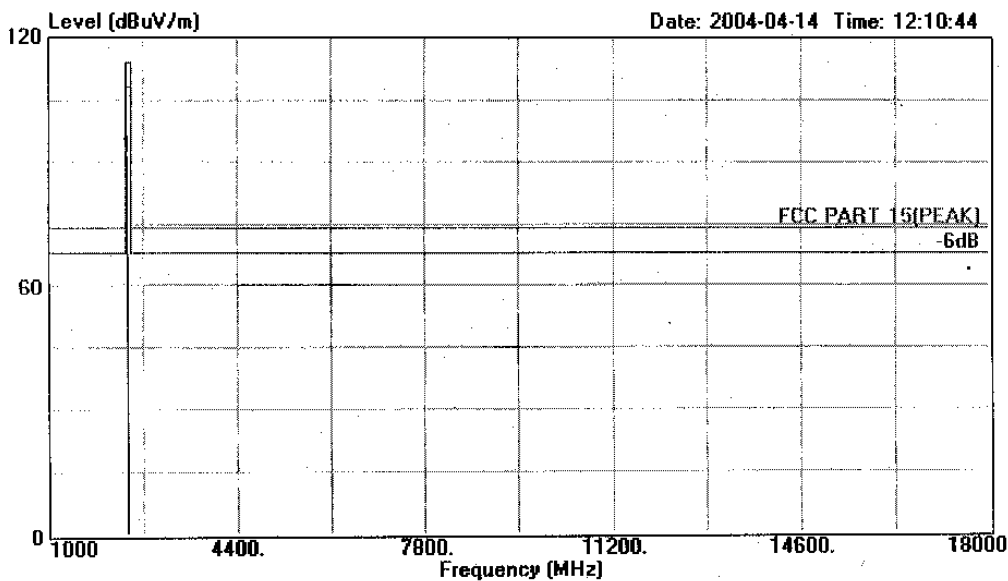

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 40

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2410.000	91.50	-22.50	114.00	60.22	3.21	28.07	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 39 File#: C:\EMI TEST DATA\C\Continental.EMI

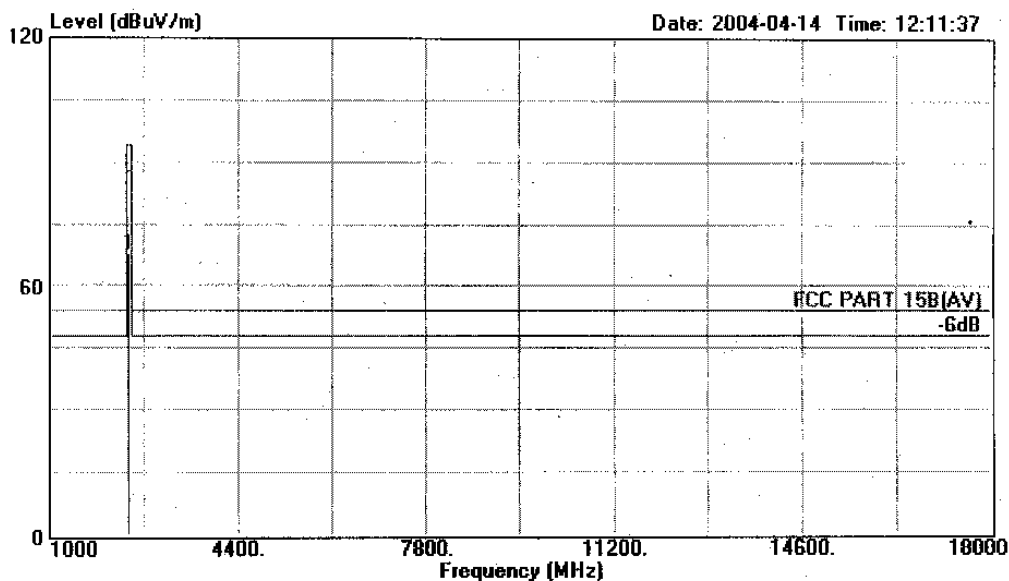

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Base Channel 40

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1	2410.000	67.90	-26.10	94.00	36.62	3.21	28.07	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 41 File#: C:\EMI TEST DATA\C\Continental.EMI

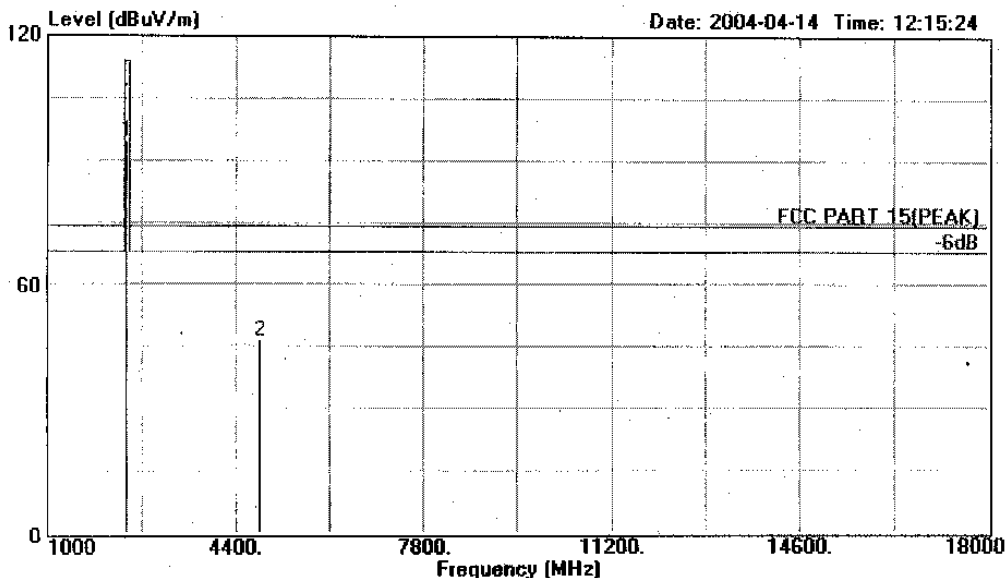

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Base Channel 40

			Over	Limit	Read	Cable	Probe	
	Freq	Level	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2410.000	94.75	-19.25	114.00	63.47	3.21	28.07	Peak
2	4820.000	46.60	-27.40	74.00	8.93	4.64	33.03	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 42 File#: C:\EMI TEST DATA\C\Continental.EMI

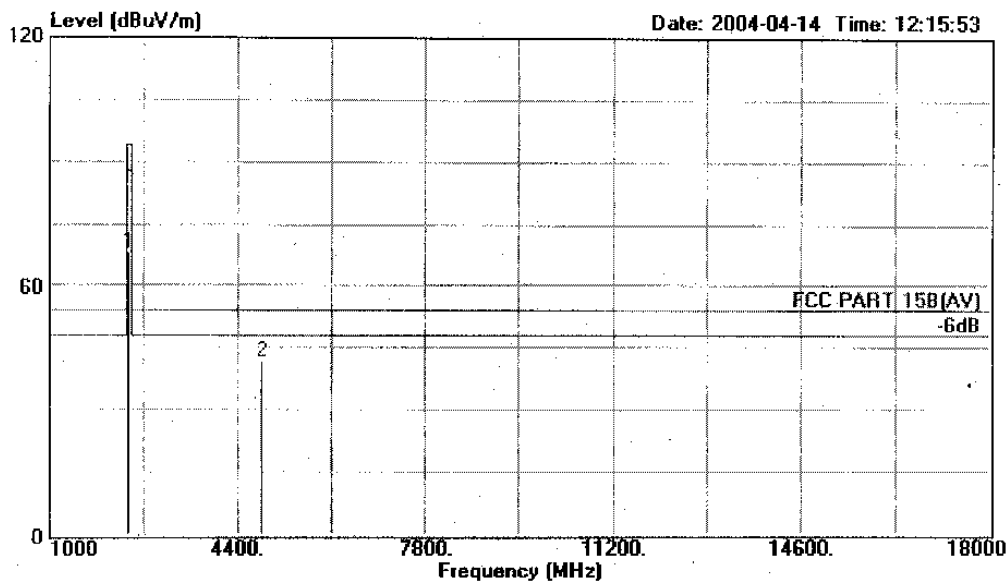

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 40

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1	2410.000	68.20	-25.80	94.00	36.92	3.21	28.07	Average
2	4820.000	41.90	-12.10	54.00	4.23	4.64	33.03	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 20 File#: C:\EMI TEST DATA\C\Continental.EMI

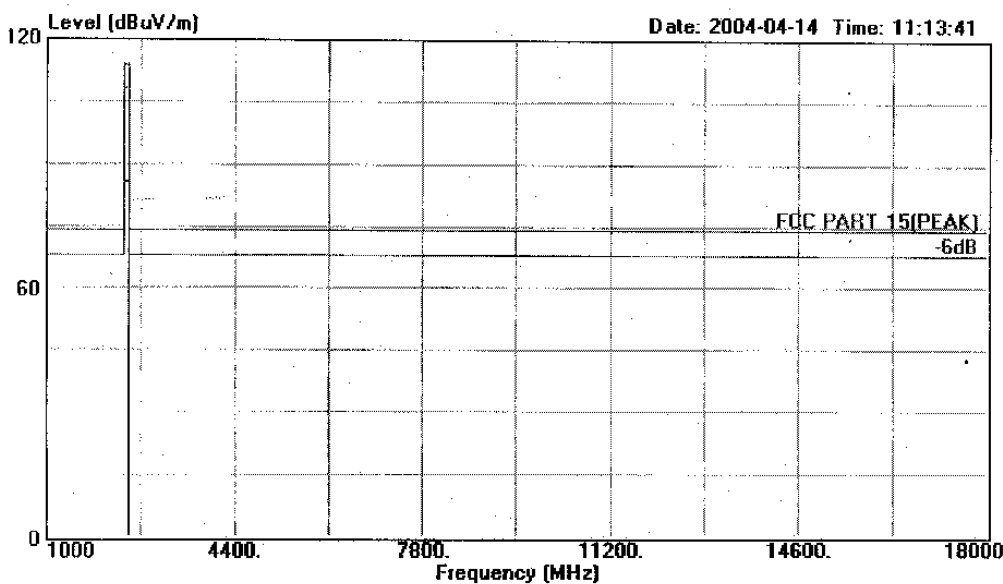

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1
Memo : Temp:24' Hum:56%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2470.000	81.80	-32.20	114.00	50.38	3.25	28.17	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 21 File#: C:\EMI TEST DATA\C\Continental.EMI

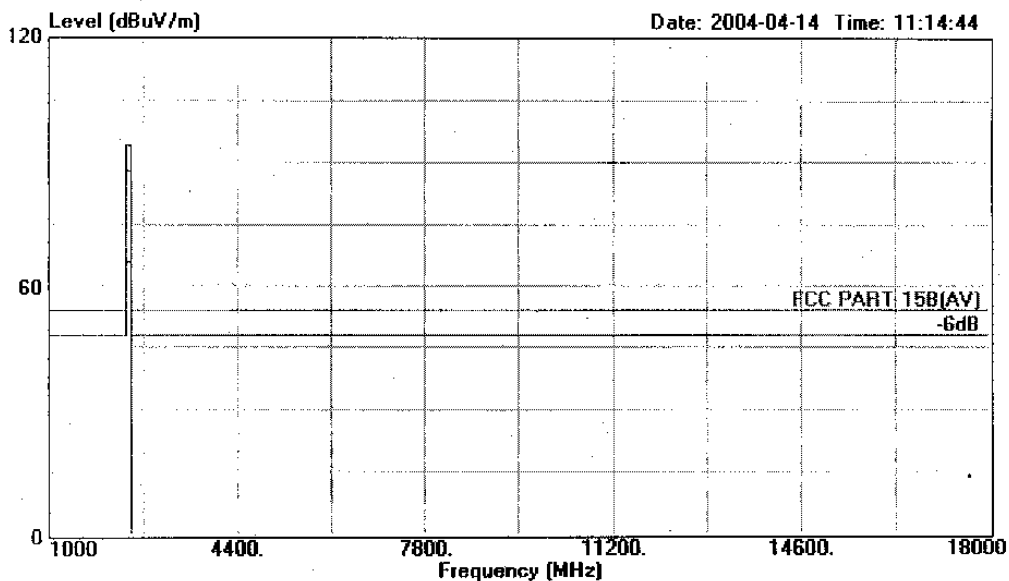

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1.
Memo : Temp:24' Hum:56%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2470.000	61.80	-32.20	94.00	30.38	3.25	28.17	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 23 File#: C:\EMI TEST DATA\C\Continental.EMI

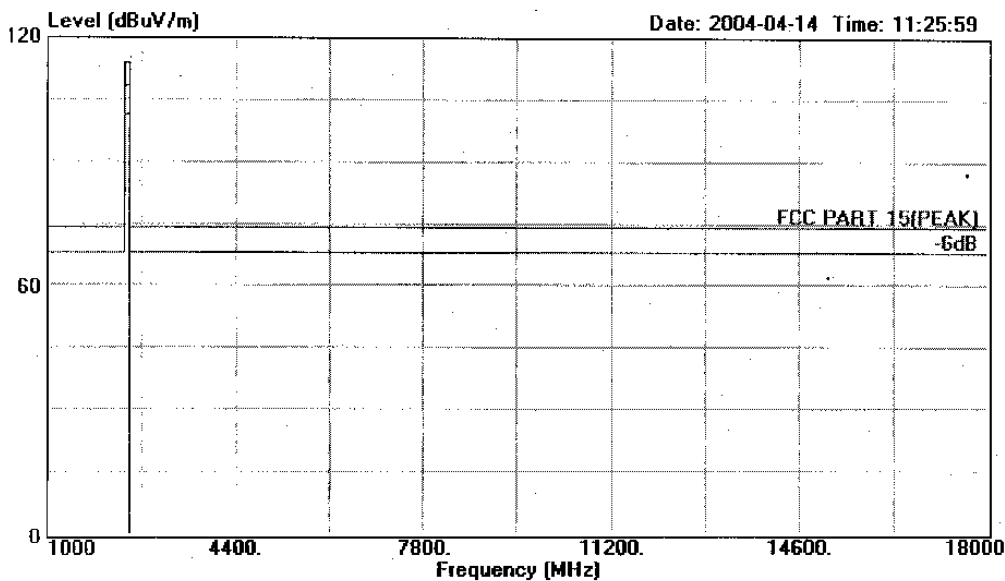

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1
Memo : Temp:24' Hum:56%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2470.000	97.25	-16.75	114.00	65.83	3.25	28.17	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 24 File#: C:\EMI TEST DATA\C\Continental.EMI

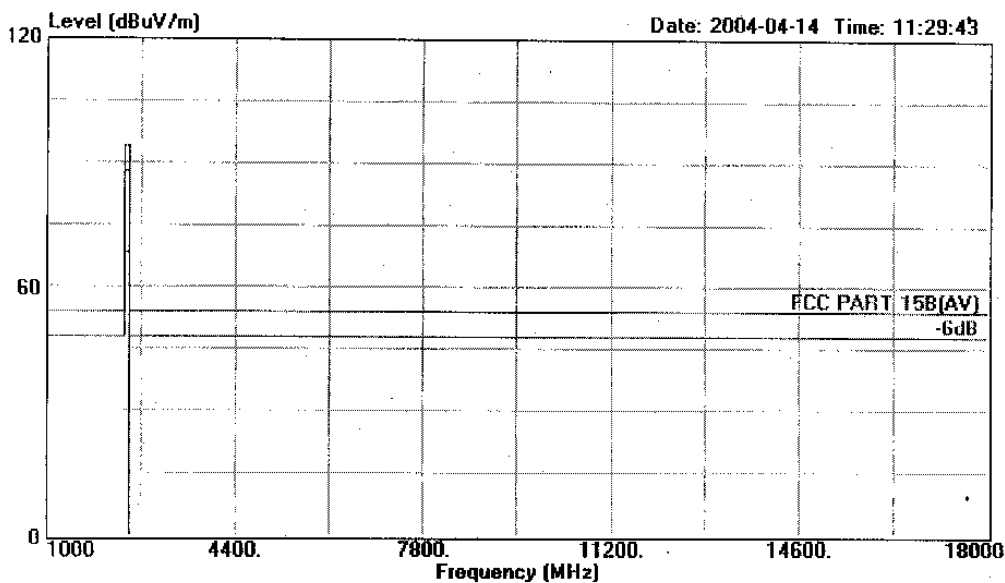

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1
Memo : Temp:24' Hum:56%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2470.000	64.20	-29.80	94.00	32.78	3.25	28.17	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 11 File#: C:\EMI TEST DATA\C\Continental.EMI

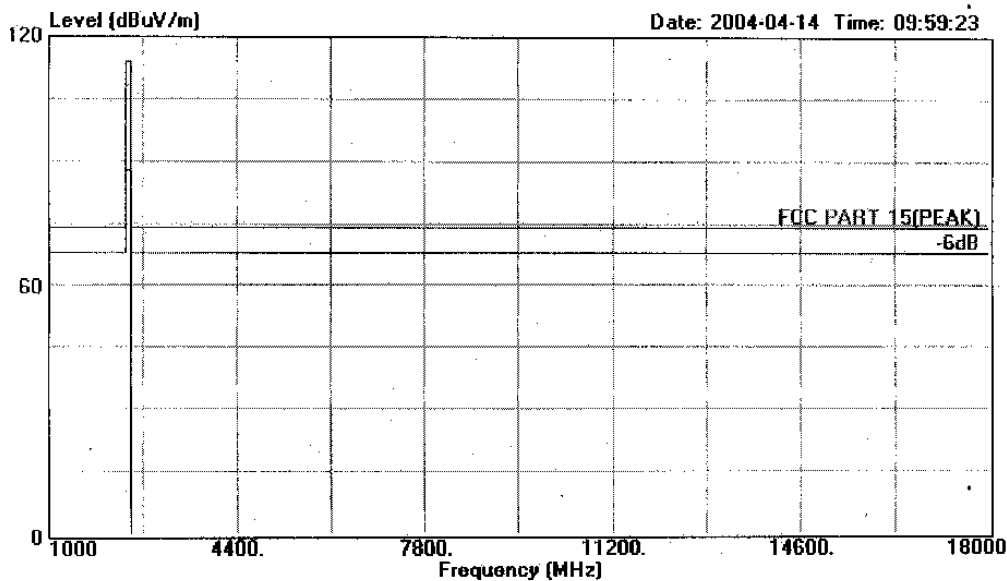

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24' Hum:56%

	Freq	Level	Limit	Over Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2474.750	83.90	-30.10	114.00	52.44	3.26	28.20	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 12 File#: C:\EMI TEST DATA\C\Continental.EMI

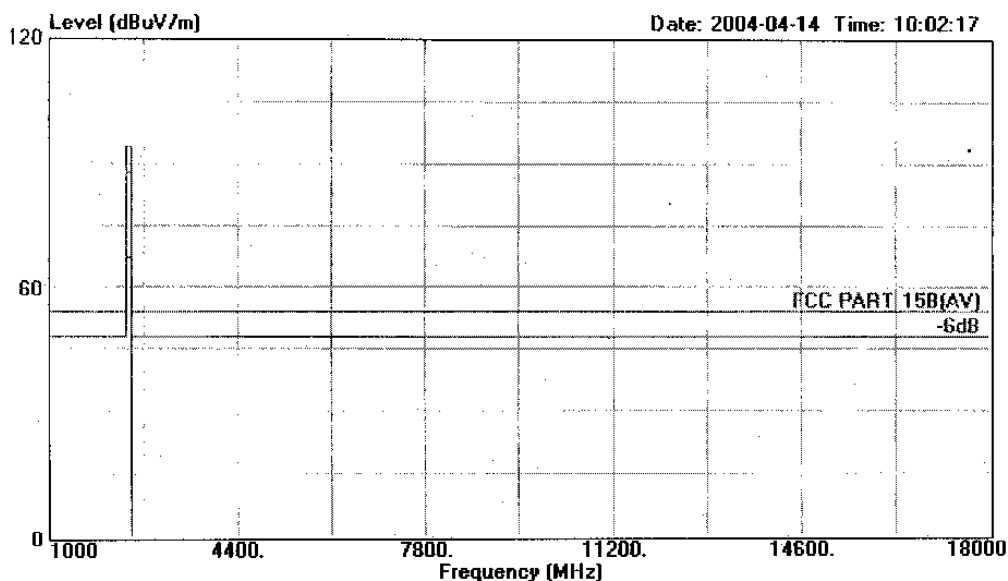

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24' Hum:56%

	Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 2474.750	63.10	-30.90	94.00	31.64	3.26	28.20 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 8 File#: C:\EMI TEST DATA\C\Continental.EMI

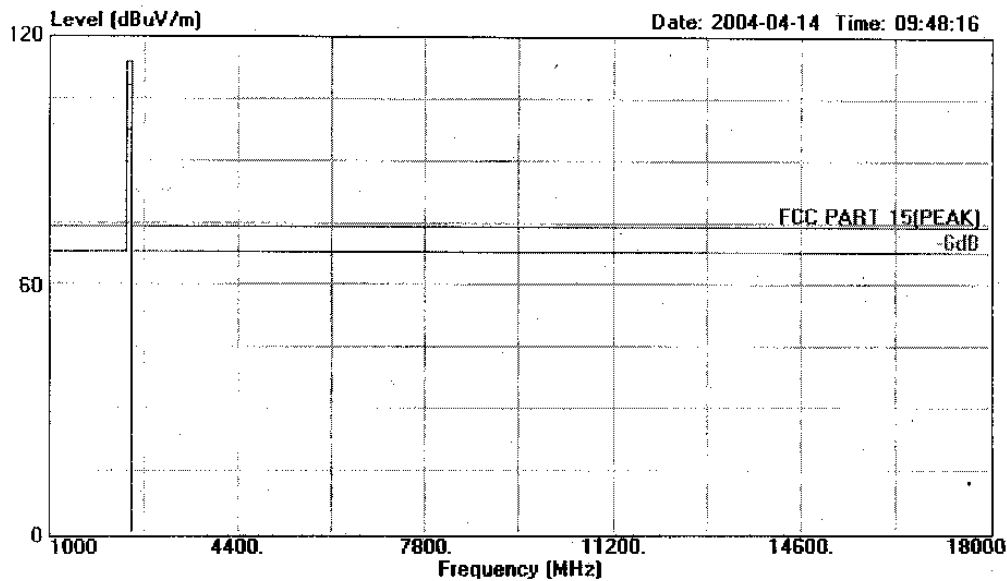

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24' Hum:56%

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2474.750	93.06	-20.94	114.00	61.60	3.26	28.20	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 9 File#: C:\EMI TEST DATA\C\Continental.EMI

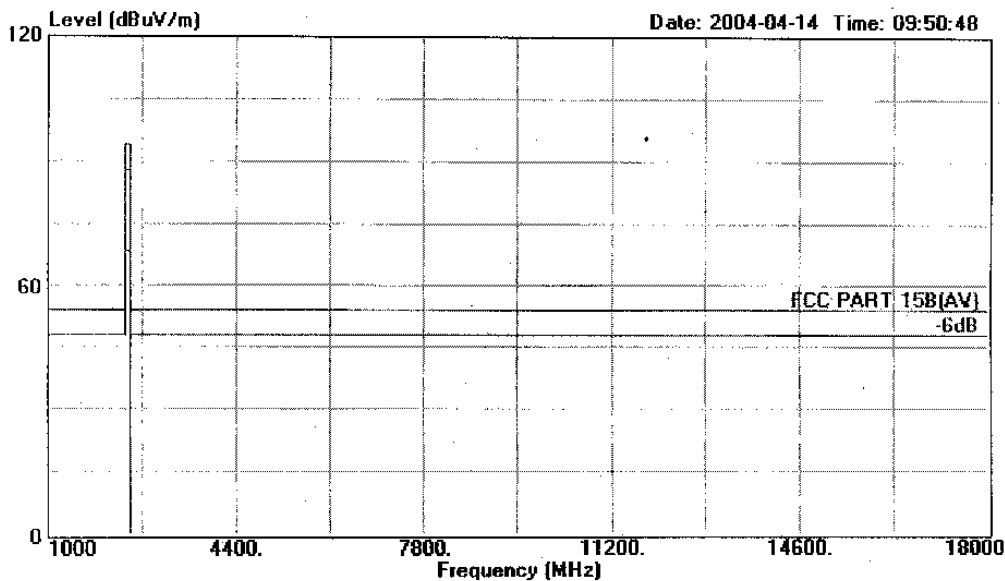

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24' Hum:56%

	Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 2474.750	64.10	-29.90	94.00	32.64	3.26	28.20 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 14 File#: C:\EMI TEST DATA\C\Continental.EMI

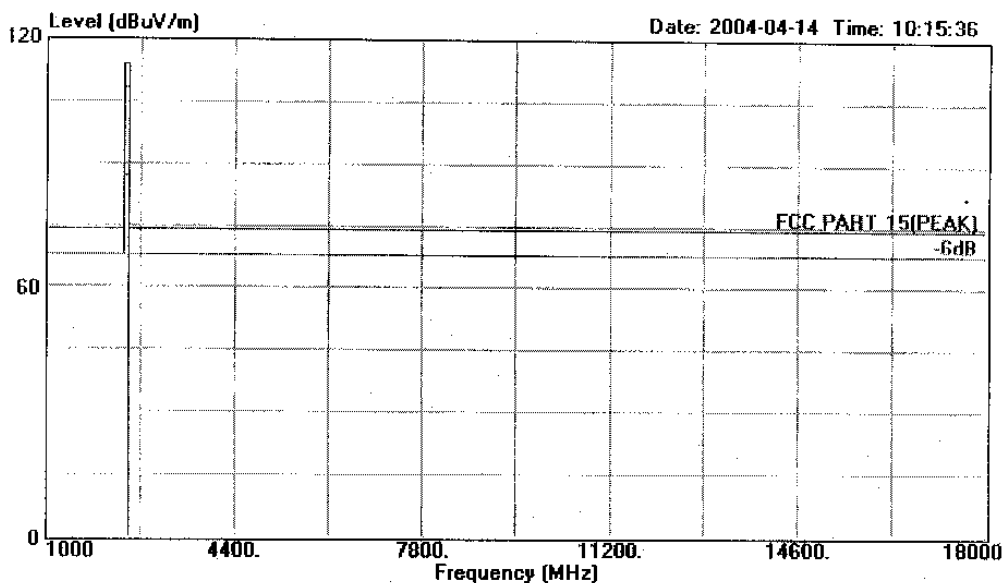

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%

	Freq	Level	Limit	Over Limit	Line	Read Level	Cable Loss	Probe Factor	Remark
	MHz	dBuV/m	dB	dBuV/m		dBuV	dB	dB	
1	2479.750	82.94	-31.06	114.00		51.48	3.26	28.20	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 15 File#: C:\EMI TEST DATA\C\Continental.EMI

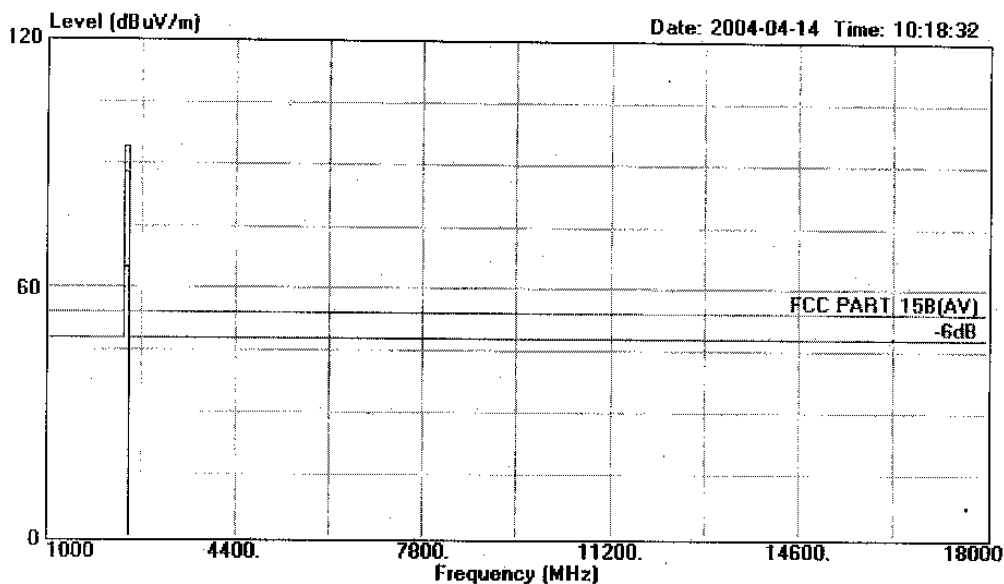

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2479.750	60.90	-33.10	94.00	29.44	3.26	28.20	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 17 File#: C:\EMI TEST DATA\C\Continental.EMI

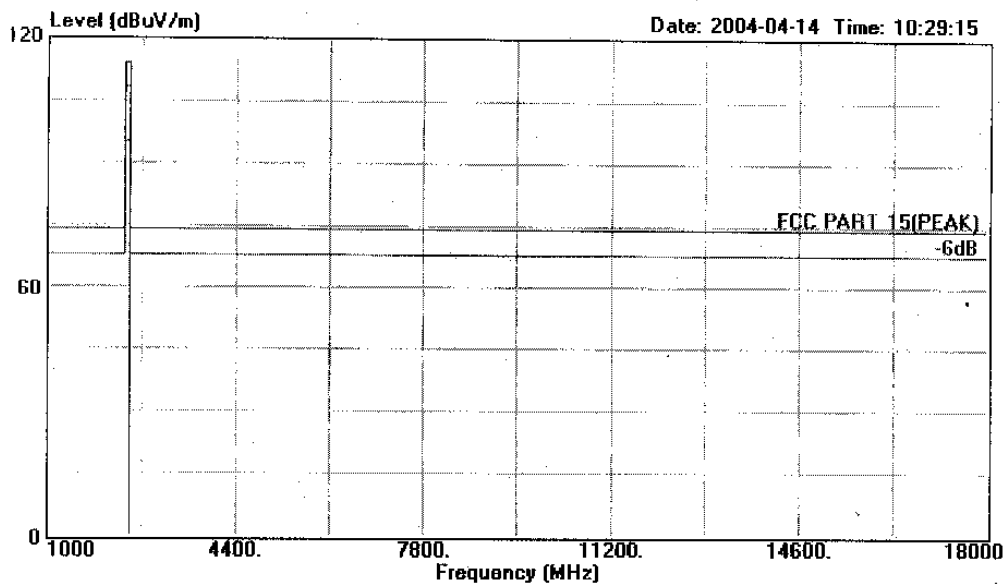

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2479.750	90.94	-23.06	114.00	59.48	3.26	28.20	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 18 File#: C:\EMI TEST DATA\C\Continental.EMI

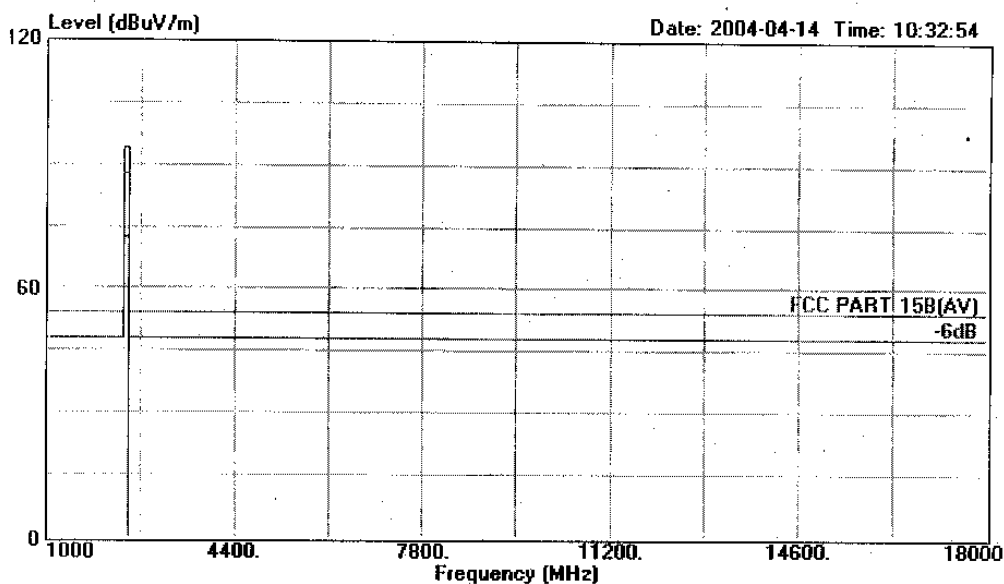

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2479.750	68.30	-25.70	94.00	36.84	3.26	28.20	Average


APPENDIX I



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 1 File#: Continental.EMI Date: 2004-04-15 Time: 09:10:33

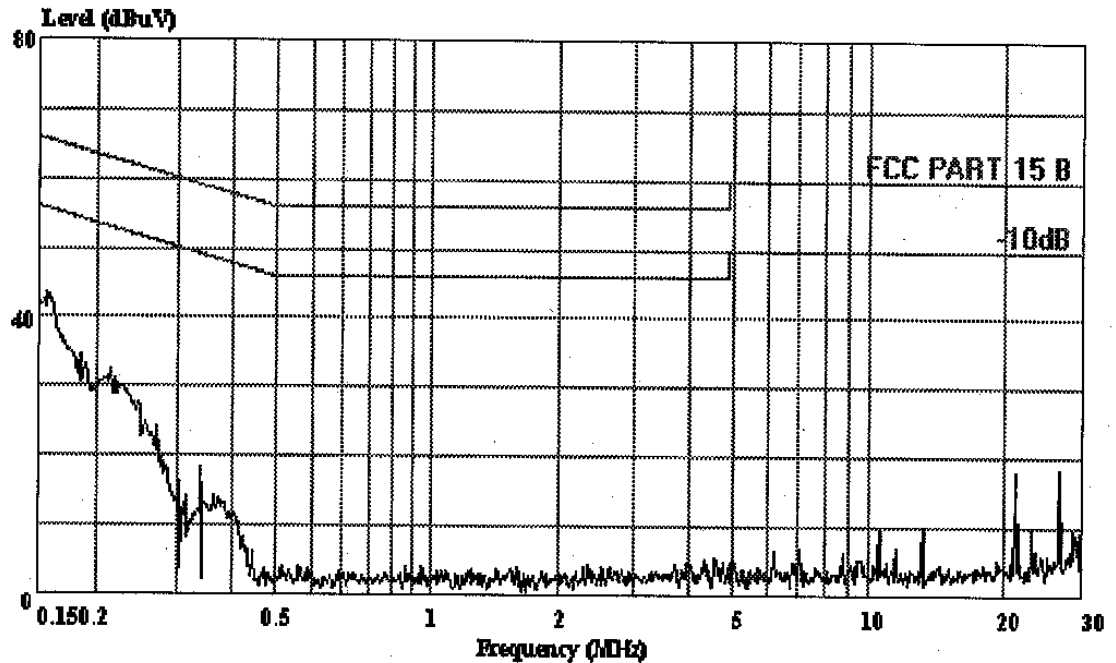

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VA (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : Base Channel 01
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 2 File#: Continental.EMI Date: 2004-04-15 Time: 09:11:10

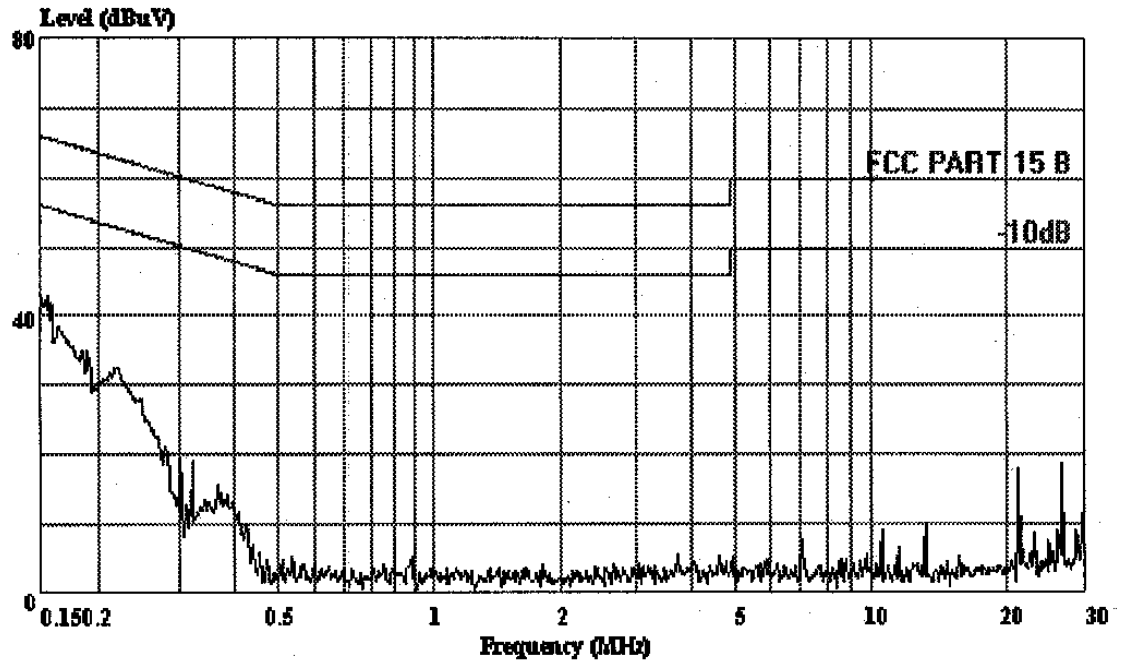

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VB (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : Base Channel 01
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 4 File#: Continental.EMI Date: 2004-04-15 Time: 09:14:48

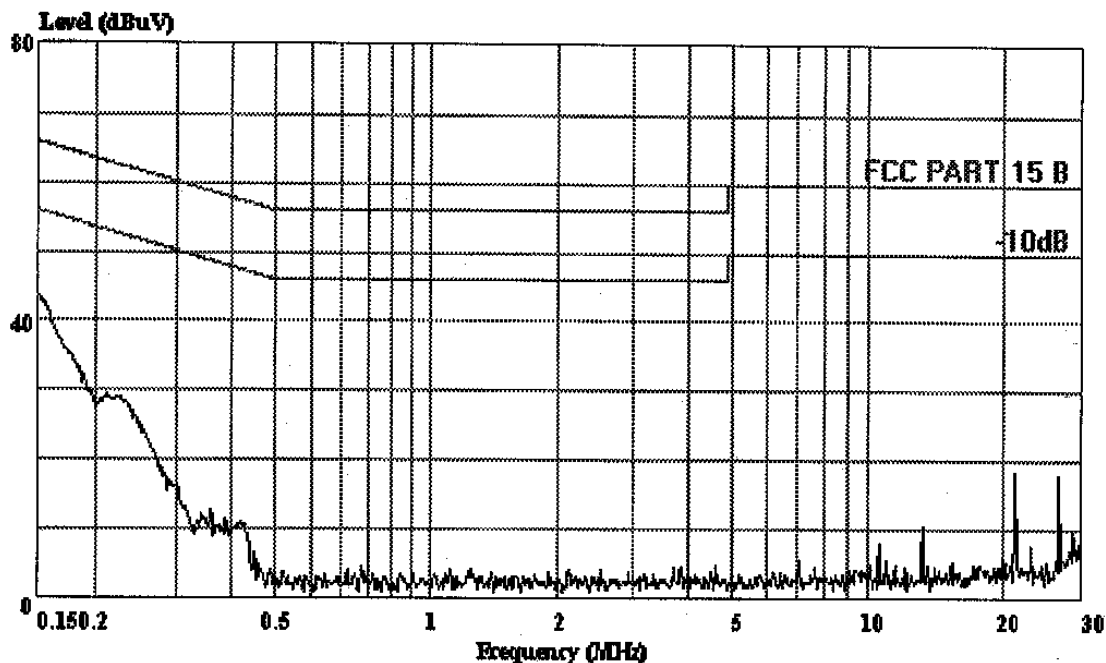

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VA (KNW-407)
 EUT : 2.4G Cordless Phone w/radio
 M/N : GH3062
 OP Condition : Base Channel 20
 Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 3 File#: Continental.EMI Date: 2004-04-15 Time: 09:14:02

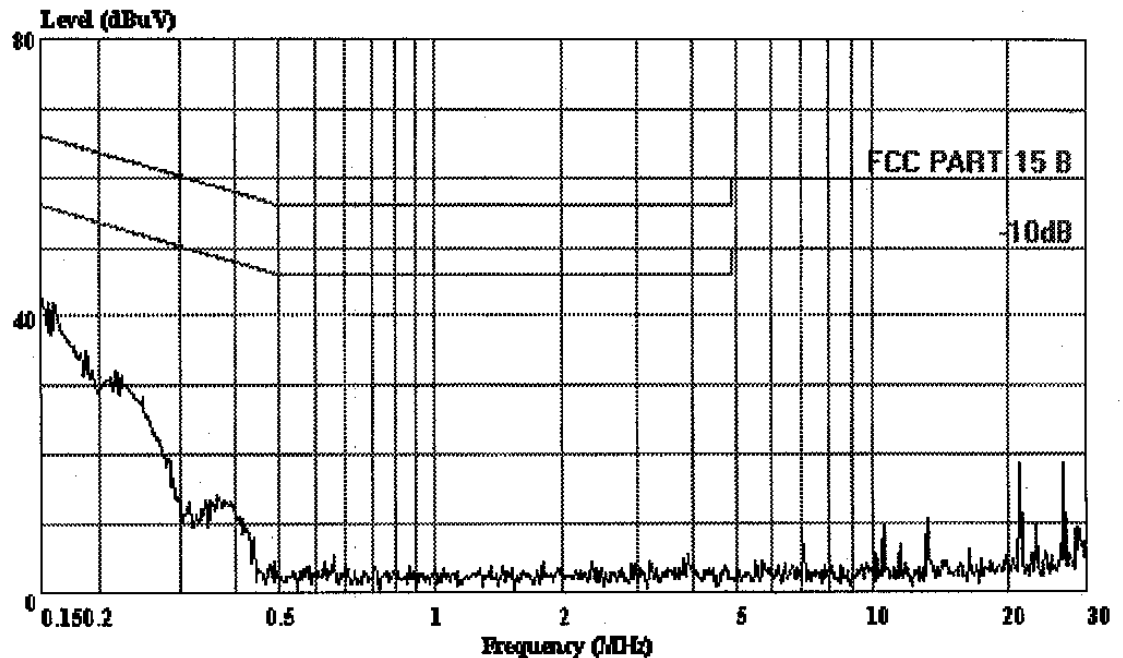

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio
 M/N : GH3062
 OP Condition : Base Channel 20
 Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 5 File#: Continental.EMI Date: 2004-04-15 Time: 09:15:31

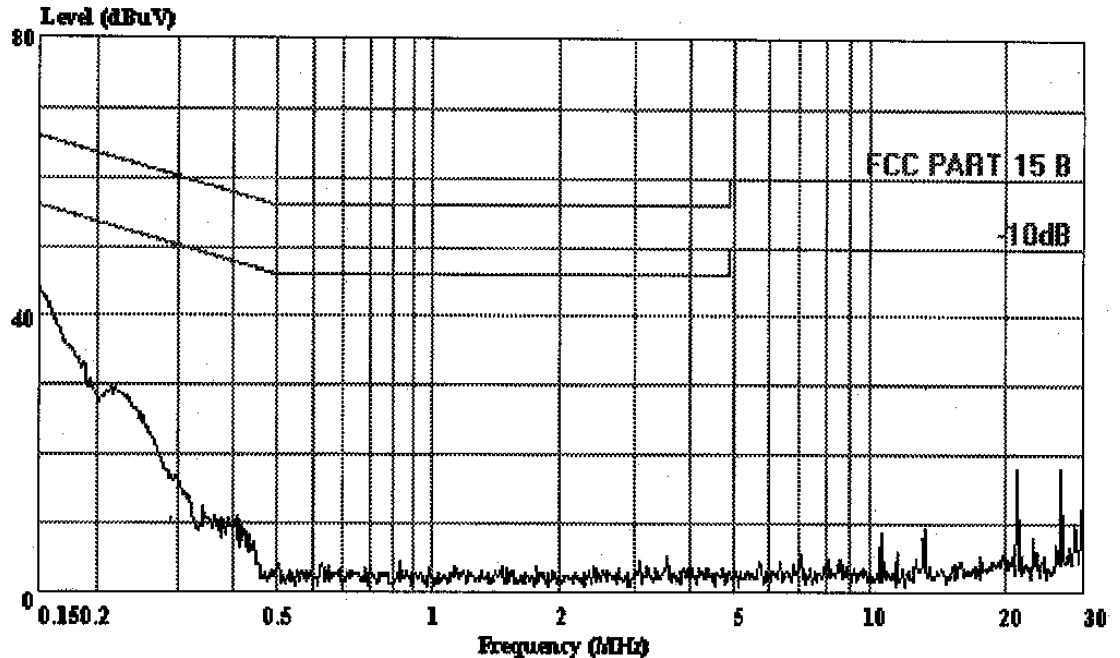

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VA (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : Base Channel 40
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 6 File#: Continental.EMI Date: 2004-04-15 Time: 09:16:09

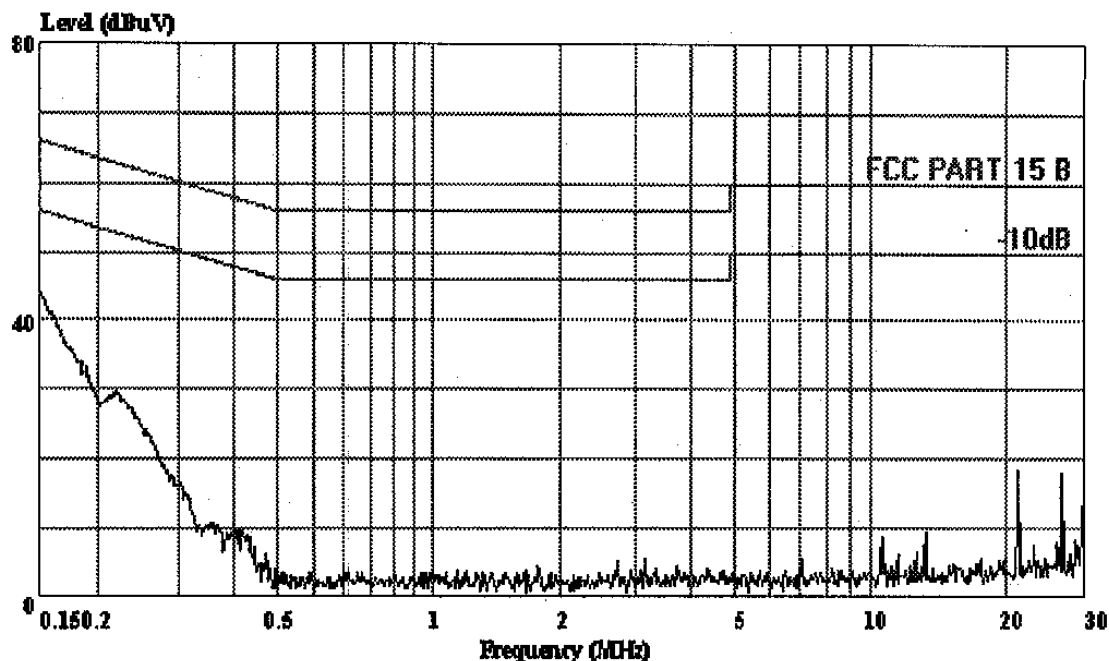

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VB (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : Base Channel 40
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 8 File#: Continental.EMI Date: 2004-04-15 Time: 09:18:13

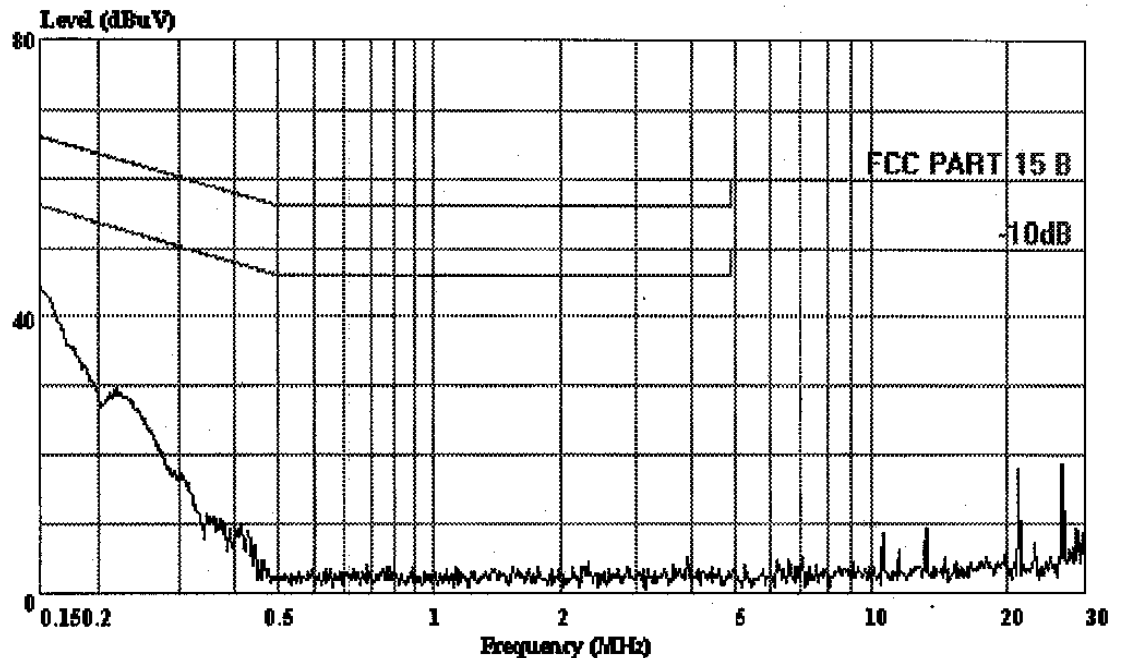

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VA (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : FM88MHz
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 7 File#: Continental.EMI Date: 2004-04-15 Time: 09:17:44

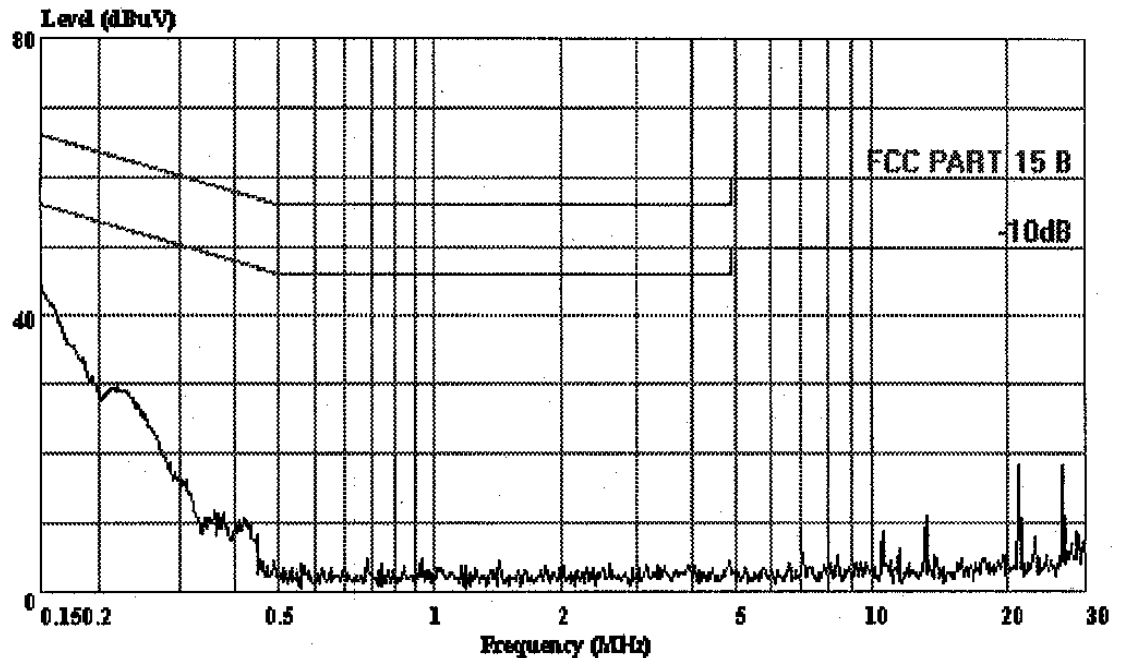

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio
 M/N : GH3062
 OP Condition : FM88MHz
 Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park

Tel:0755-26639496

Fax:26632877

Data#: 9 File#: Continental.EMI Date: 2004-04-15 Time: 09:18:50

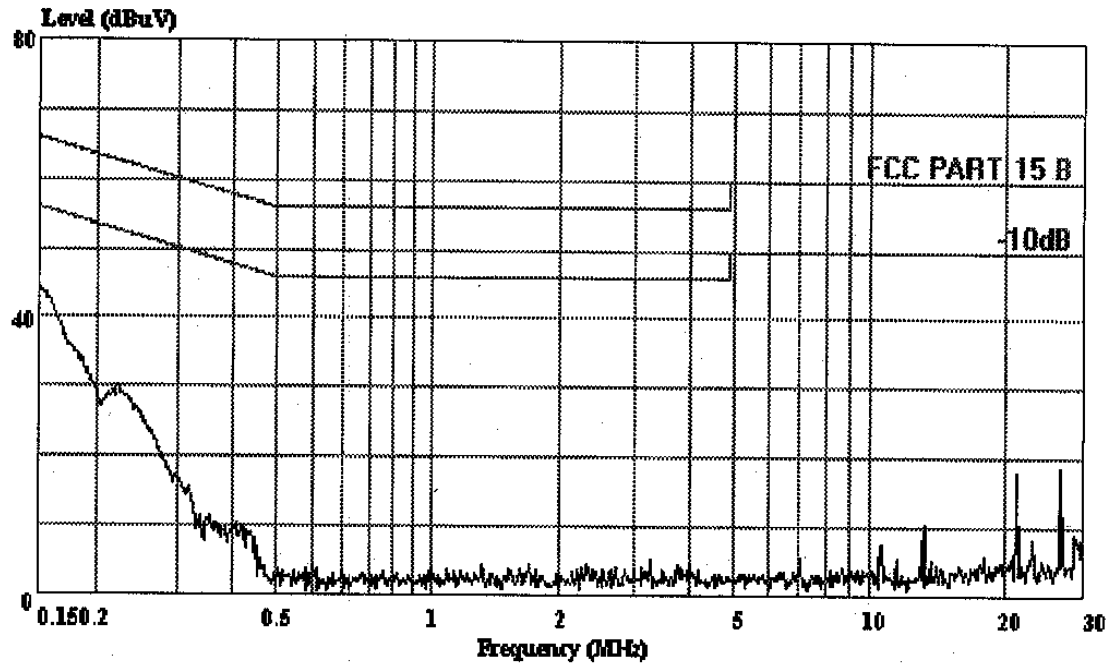

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

OP Condition : FM98MHz

Test Spec : Adaptor AC Input 120V/60Hz Output DC10V

Test Engineer: Seco


Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 10 File#: Continental.EMI Date: 2004-04-15 Time: 09:19:40

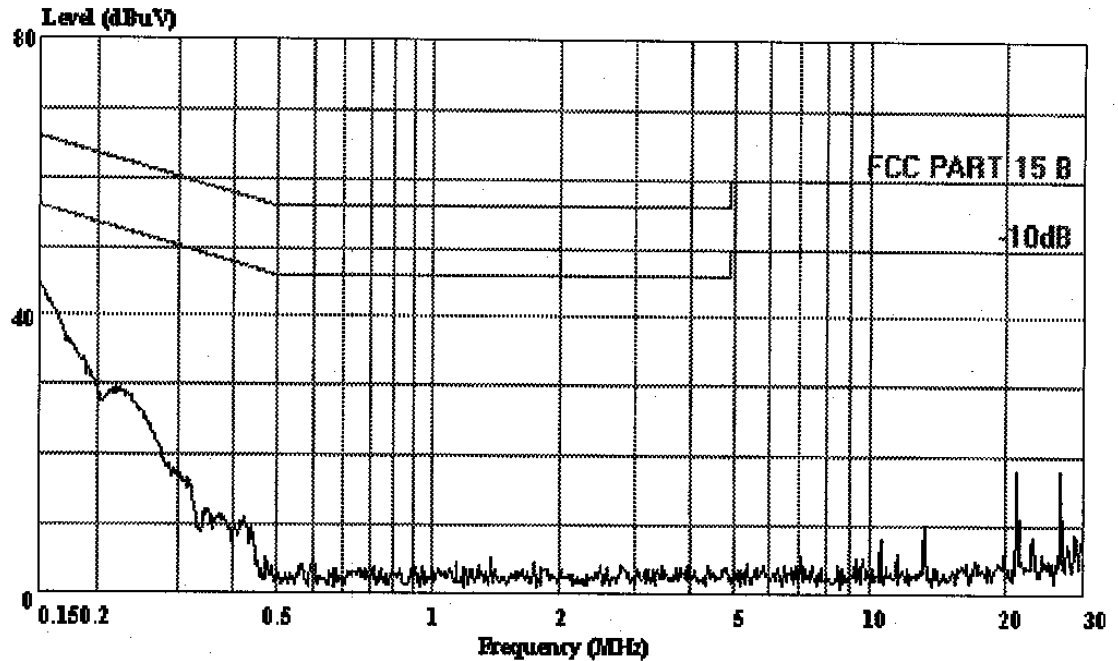

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VB (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : FM98MHz
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 13 File#: Continental.EMI Date: 2004-04-15 Time: 09:31:56

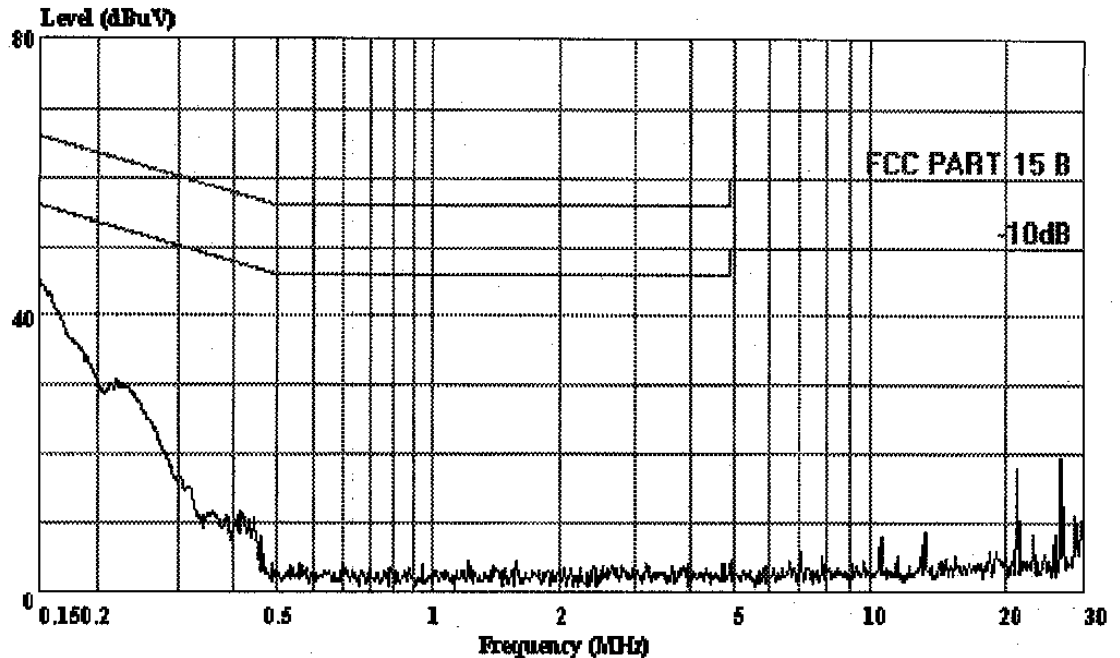

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VA (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : FM108MHz
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 11 File#: Continental.EMI Date: 2004-04-15 Time: 09:20:20

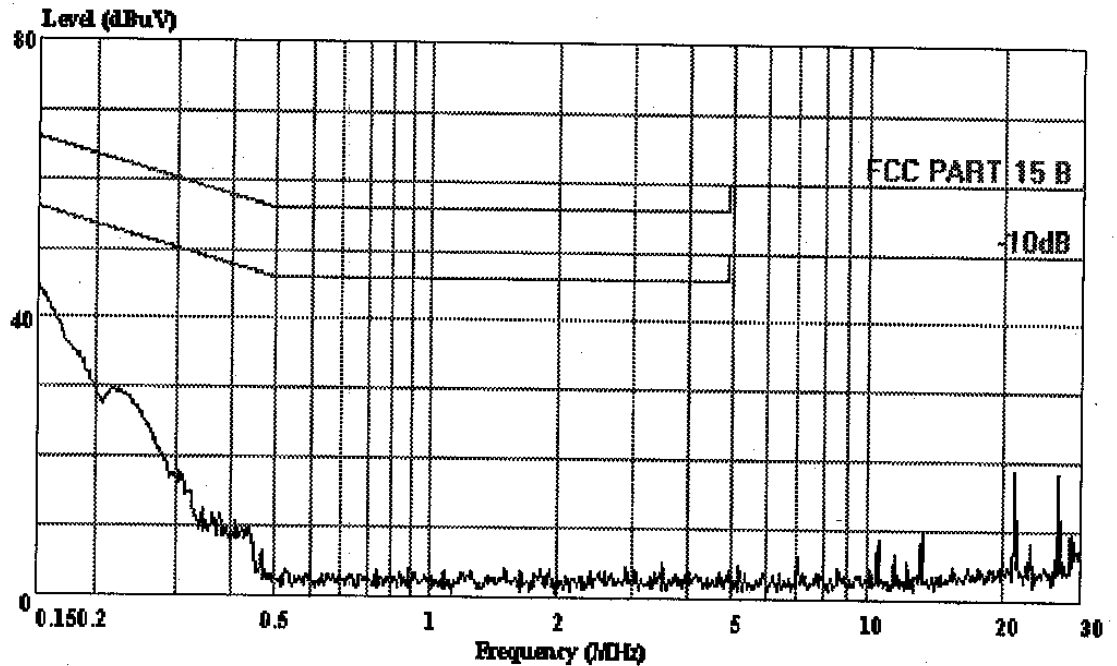

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
OP Condition : FM108MHz
Test Spec : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer: Seco
Comment : Temp:23' Humi:54%

APPENDIX II




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-04-14 Time: 21:27:46

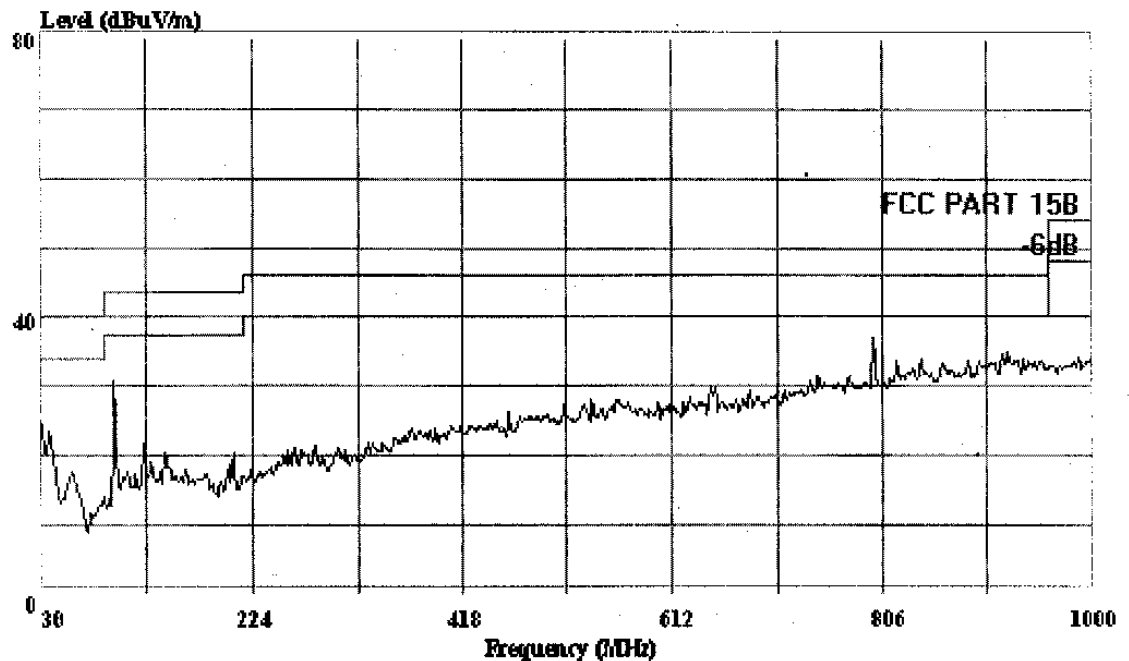

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Base Channel 01




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 17 File#: Continental.EMI Date: 2004-04-14 Time: 21:25:31

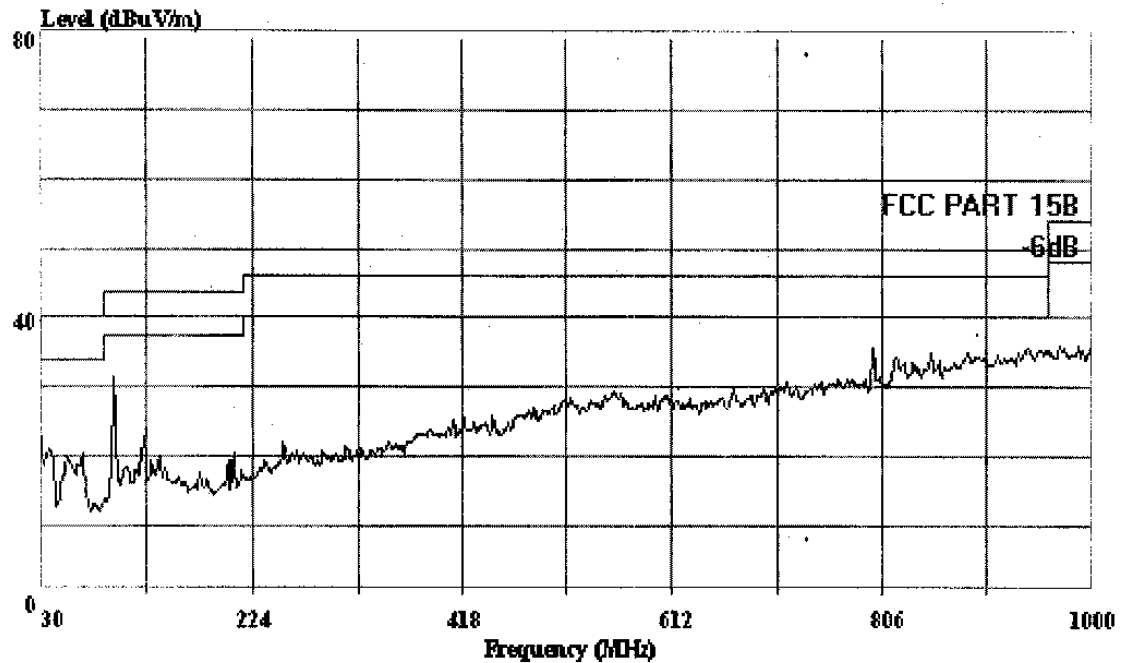

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Base Channel 01




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 19 File#: Continental.EMI Date: 2004-04-14 Time: 21:29:06

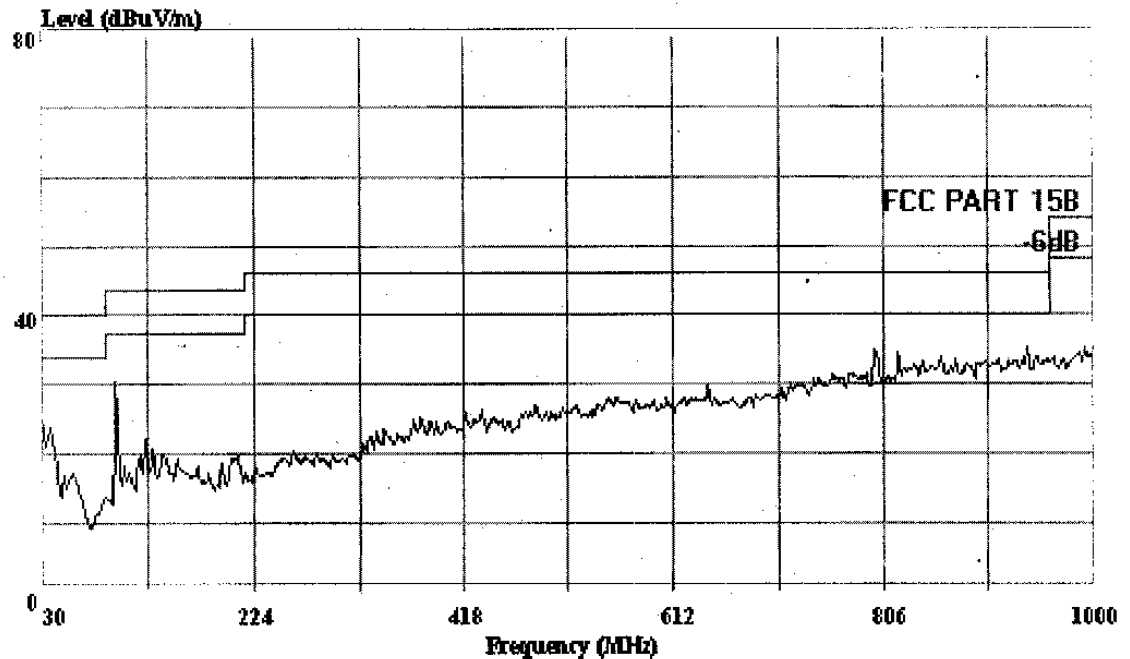

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%


: Base Channel 20



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: 00 File#: Continental.EMI Date: 2004-04-14 Time: 21:31:26

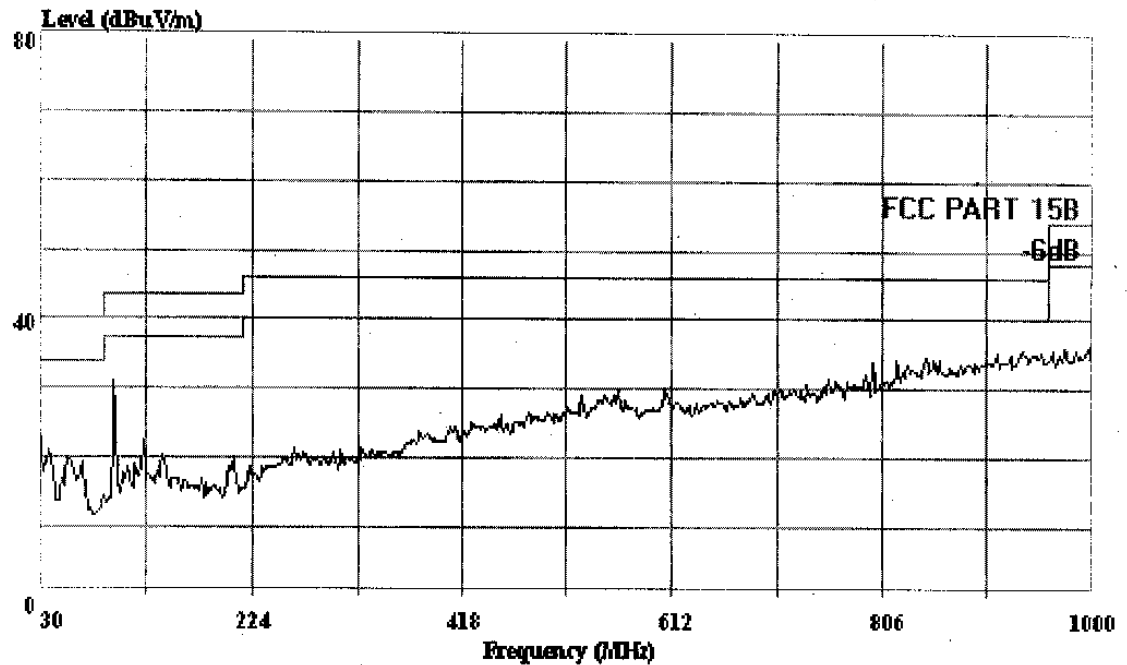

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Base Channel 20




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 23 File#: Continental.EMI Date: 2004-04-14 Time: 21:39:16

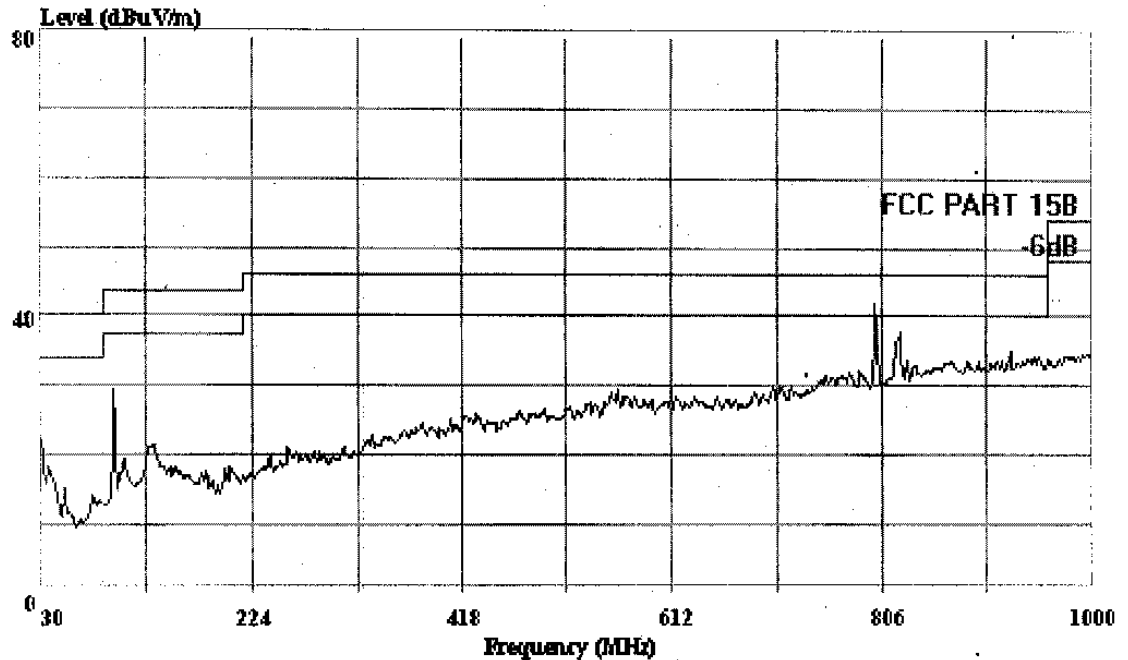

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Tempo:24' Humid:54%

: Base Channel 40




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 31 File#: Continental.EMI Date: 2004-04-14 Time: 21:35:35

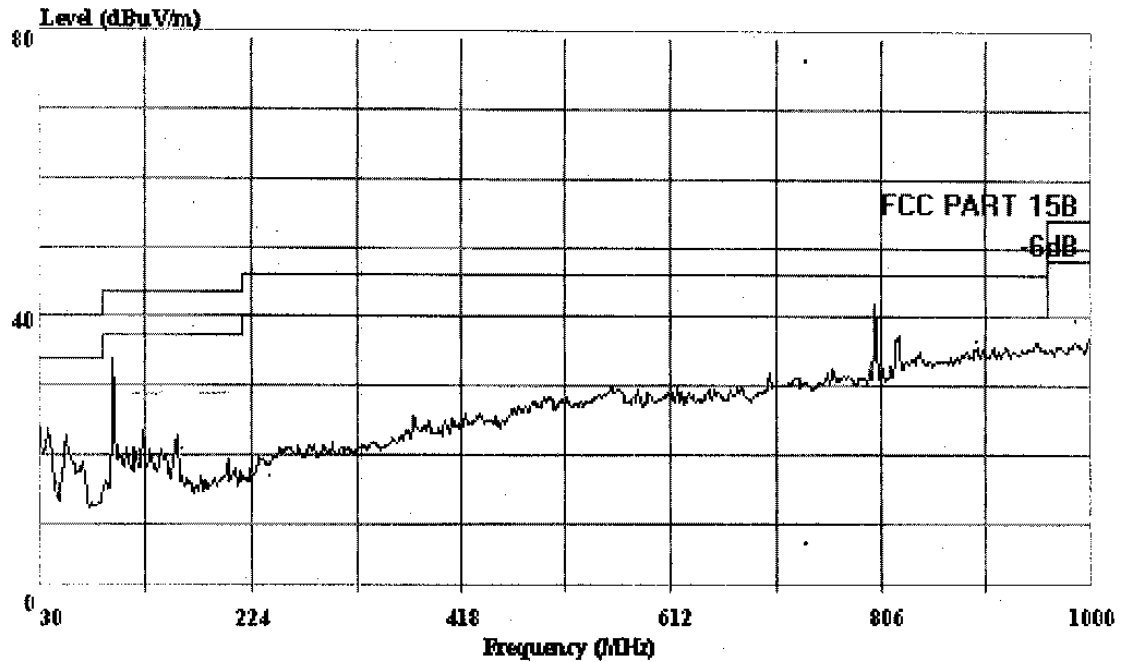

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Base Channel 40




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 0 File#: Continental.EMI Date: 2004-04-14 Time: 21:10:21

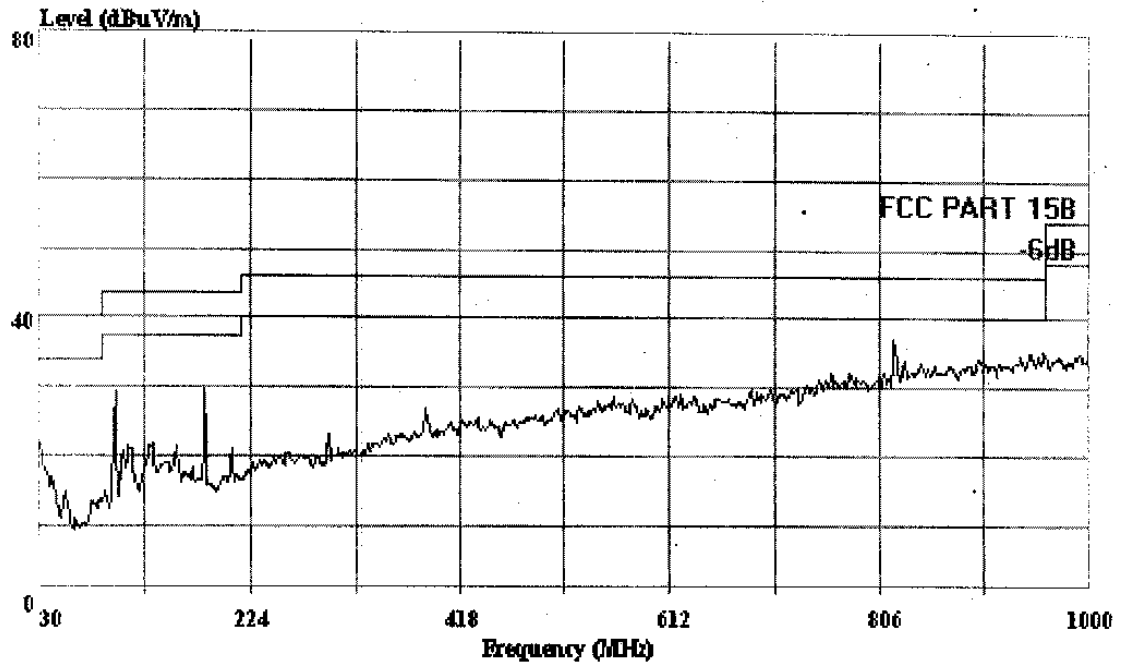

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC12V

Engineer: Seco


Memo : Temp:24' Humi:54%

: FM88MHz

AUDIX[®]
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 10 File#: Continental.EMI Date: 2004-04-14 Time: 21:12:37

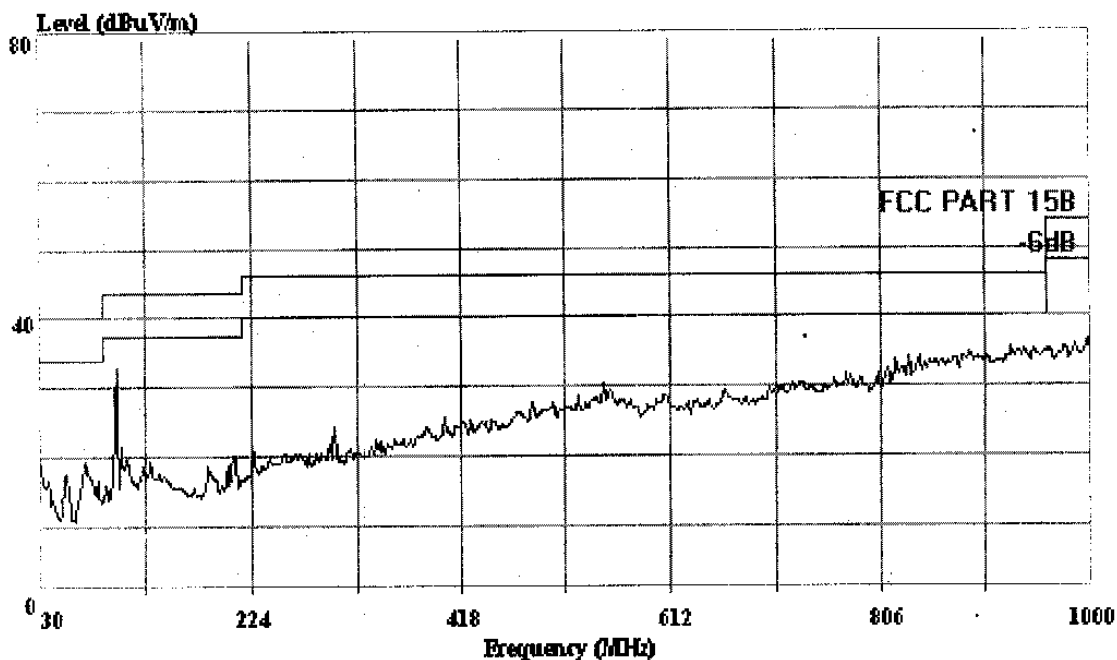

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco


Memo : Temp:24' Humi:54%

: FM88MHz

AUDIX[®]
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-04-14 Time: 21:14:20

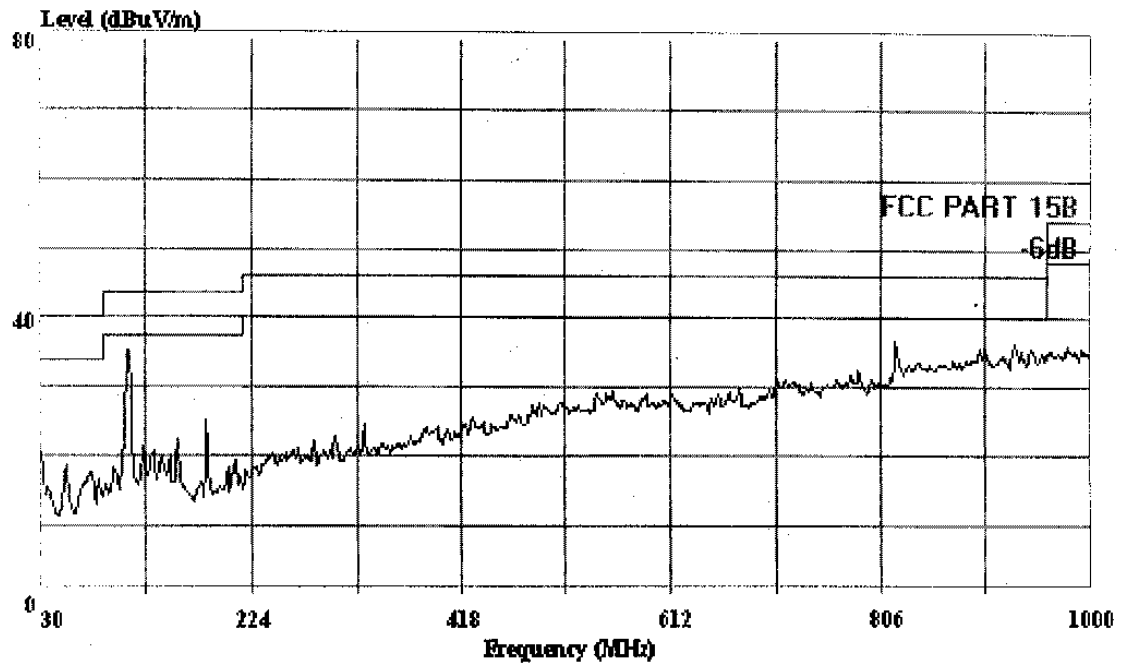

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: FM98MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 12 File#: Continental.EMI Date: 2004-04-14 Time: 21:15:19

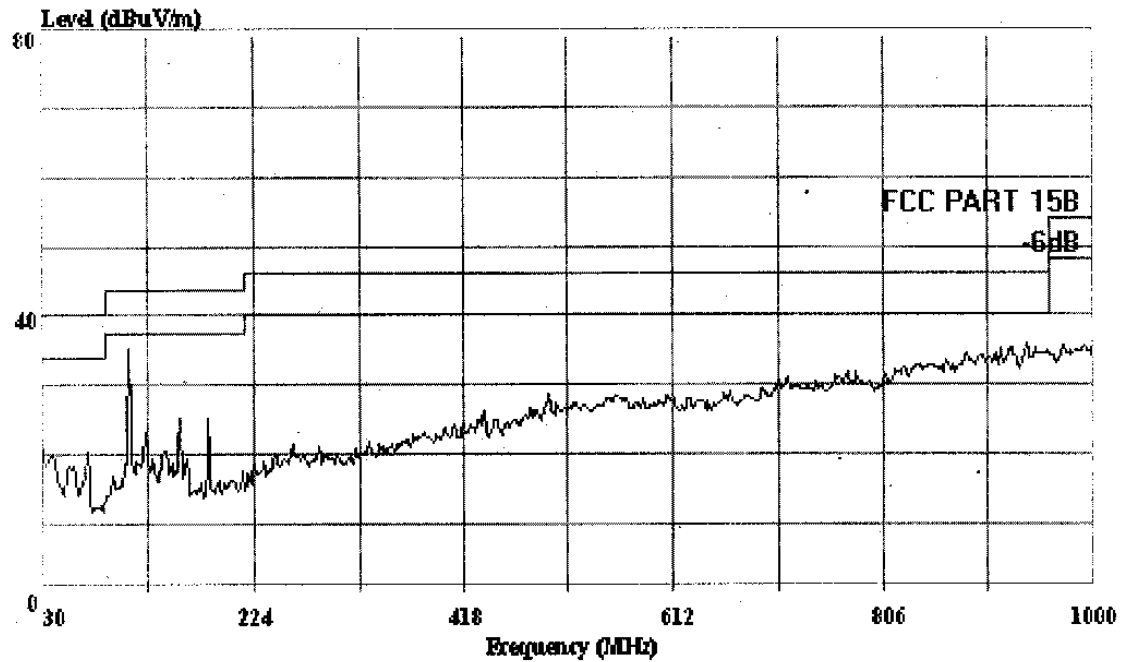

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: FM98MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-04-14 Time: 21:19:19

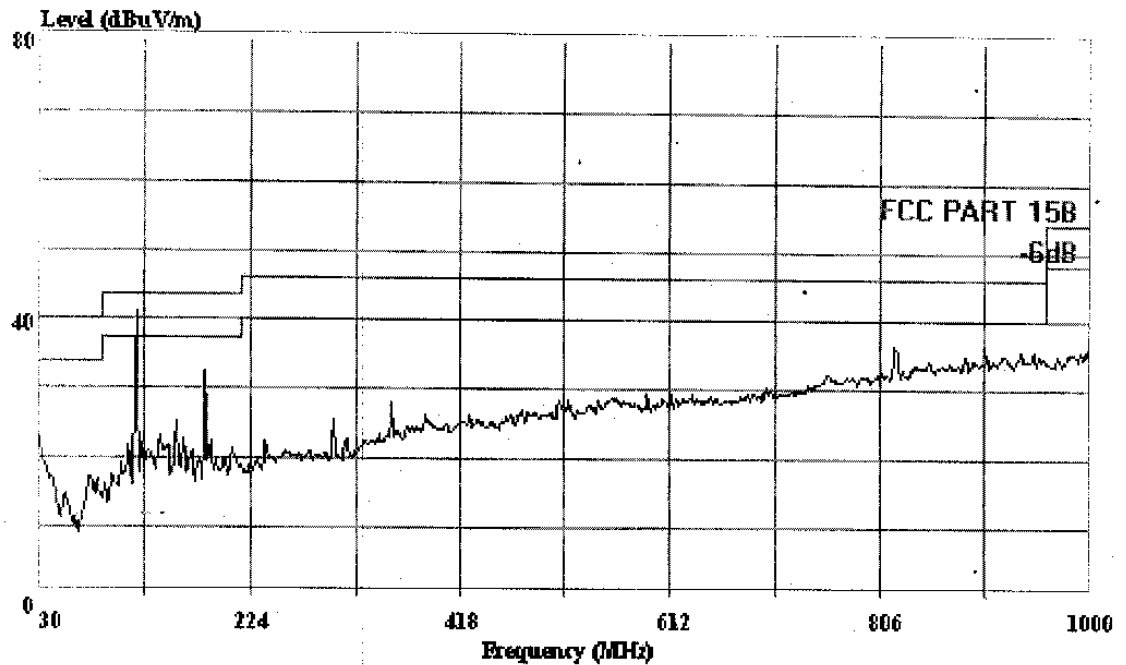

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24' Humi:54%

: FM108MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 13 File#: Continental.EMI Date: 2004-04-14 Time: 21:16:29

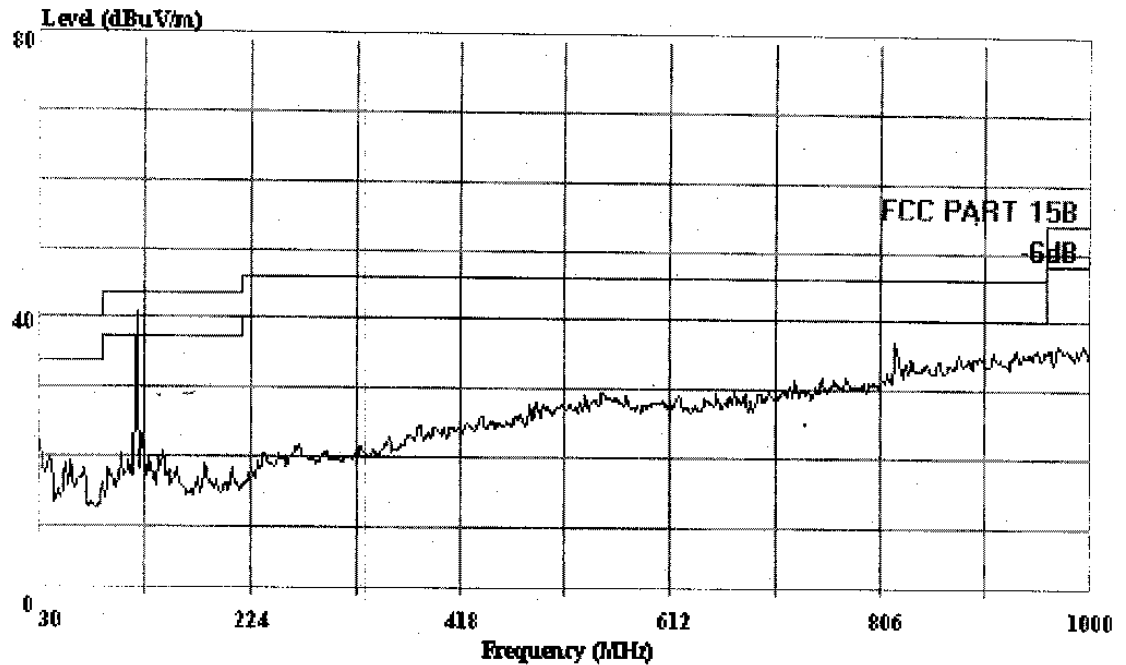

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : Adaptor AC Input 120V/60Hz Output DC10V

Engineer: Seco

Memo : Temp:24° Humi:54%

: FM108MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-04-04 Time: 13:42:22

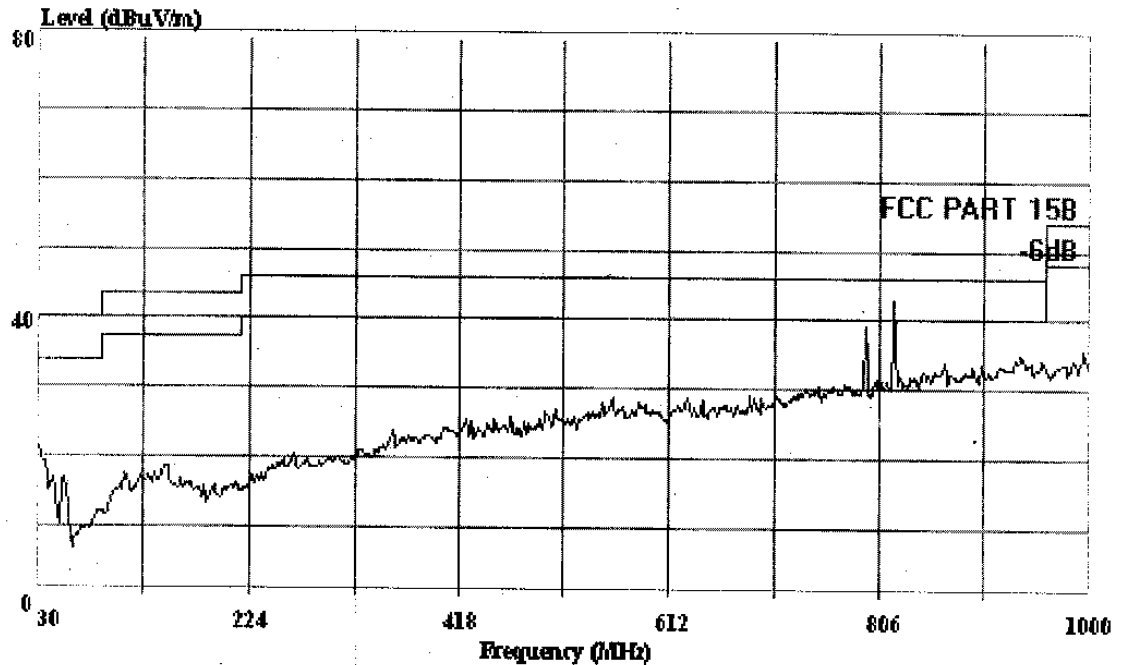

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : DC 3.6V

Engineer: Seco

Memo : Temp:24' Humi:54%


: Handset CH 01



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-04-04 Time: 13:40:30

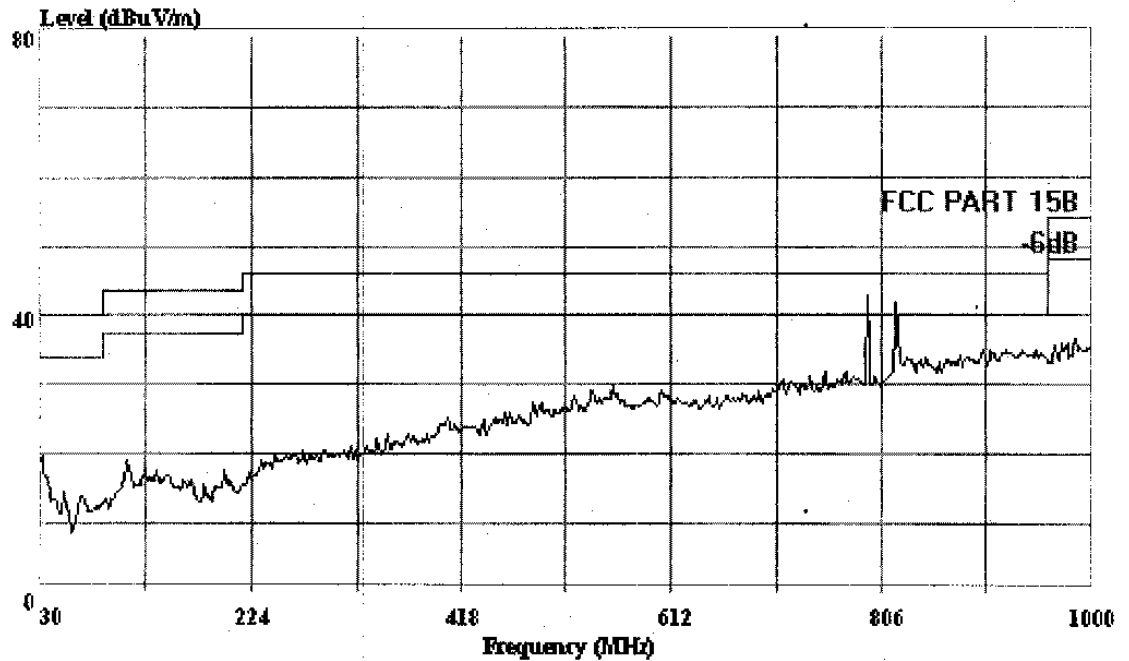

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio
 M/N : GH3062
 Power : DC 3.6V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Handset CH 01




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen, Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 3 File#: Continental.EMI Date: 2004-04-04 Time: 13:43:31

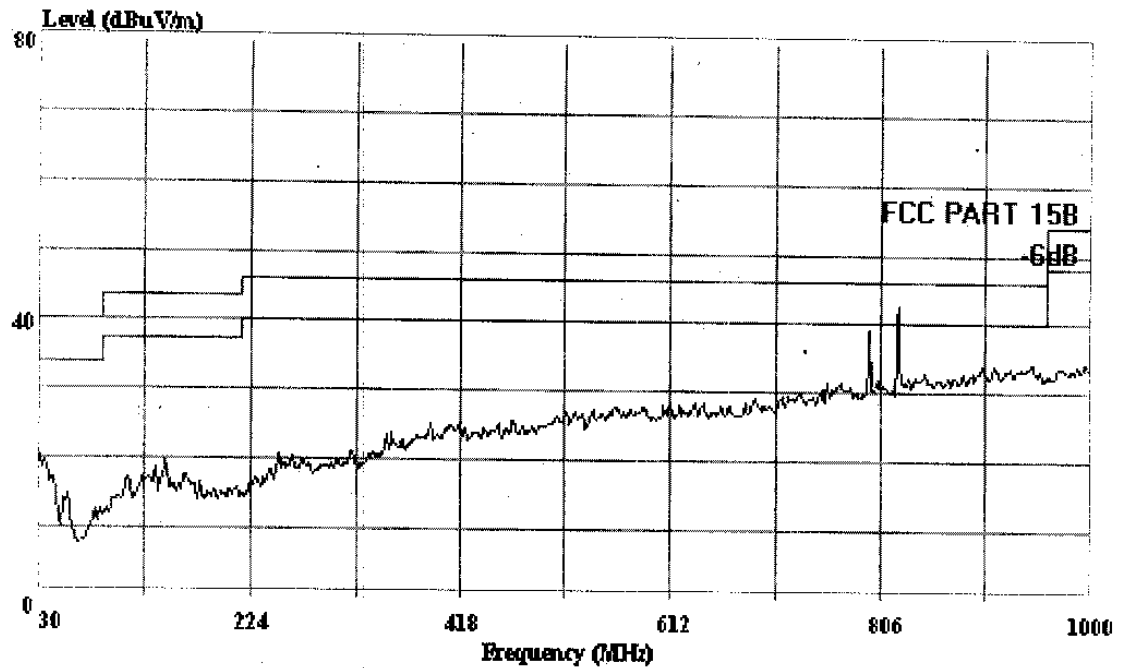

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : DC 3.6V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Handset CH 20




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 4 File#: Continental.EMI Date: 2004-04-04 Time: 13:44:19

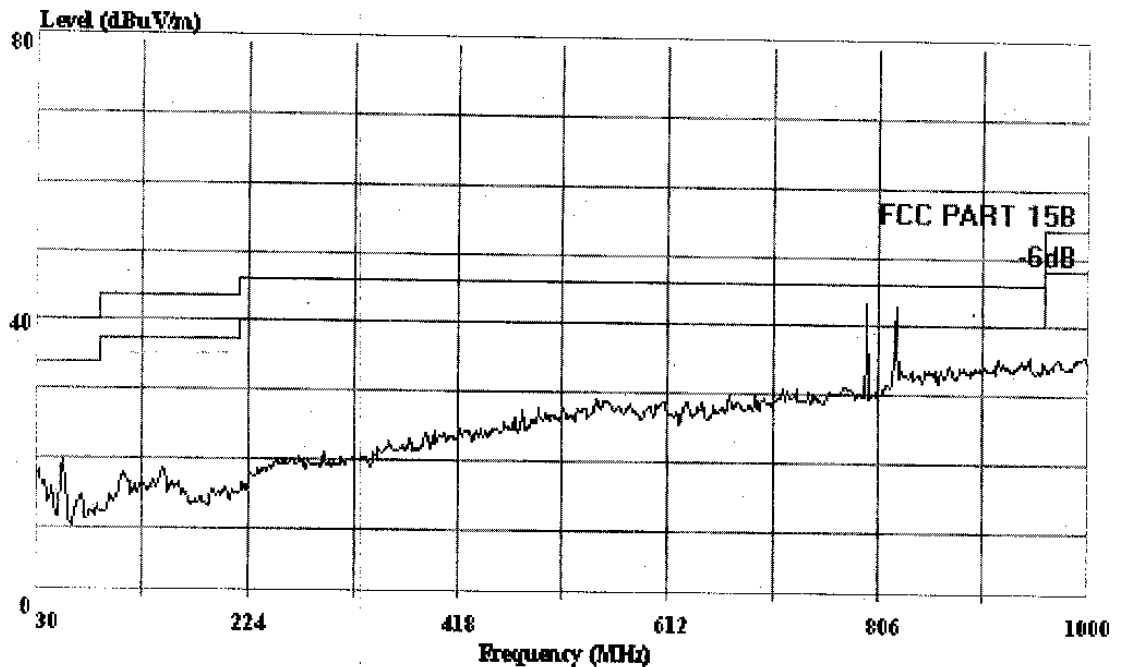

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : DC 3.6V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Handset CH 20

AUDIX®


AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-04-04 Time: 13:50:43

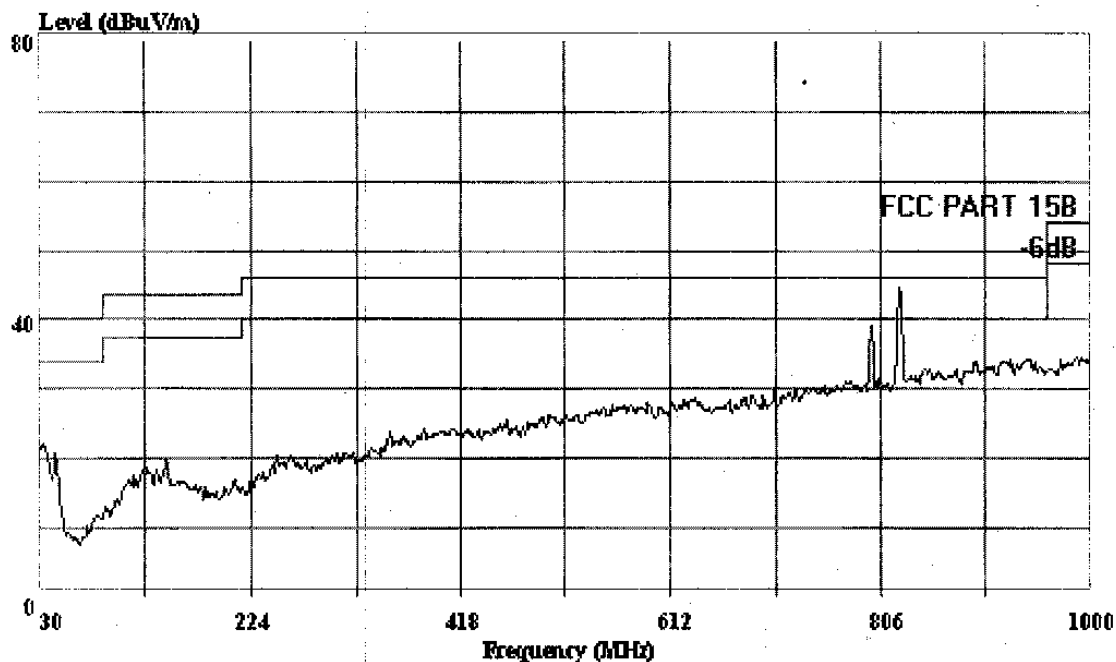

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m.2598FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : DC 3.6V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Handset CH 40




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 5 File#: Continental.EMI Date: 2004-04-04 Time: 13:45:26

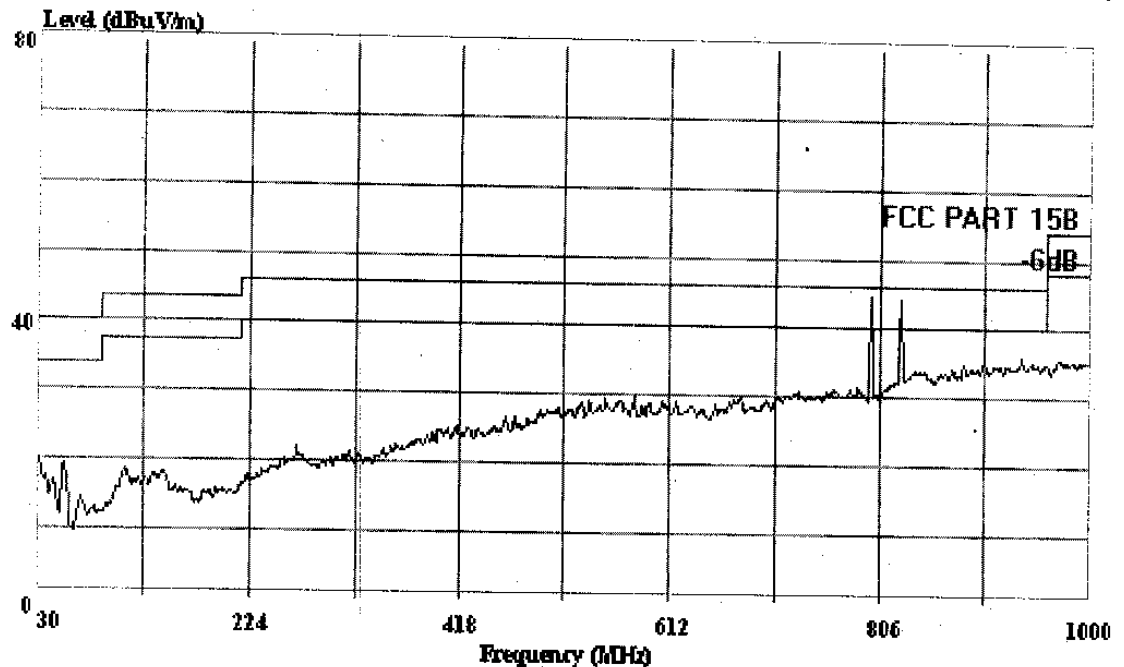

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio

M/N : GH3062

Power : DC 3.6V

Engineer: Seco

Memo : Temp:24' Humi:54%

: Handset CH 40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 25 File#: C:\EMI TEST DATA\C\Continental.EMI

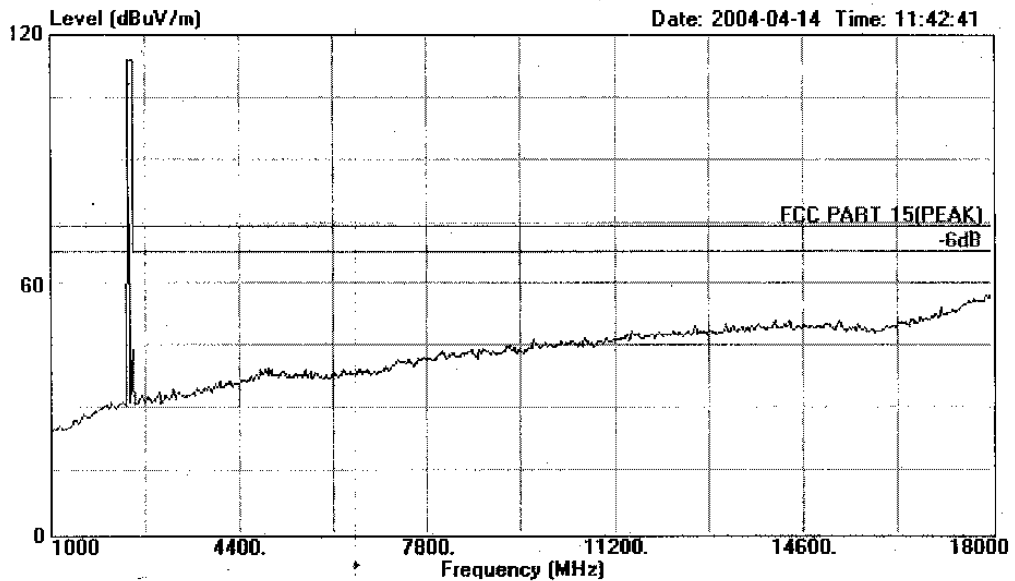

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 01




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 28 File#: C:\EMI TEST DATA\C\Continental.EMI

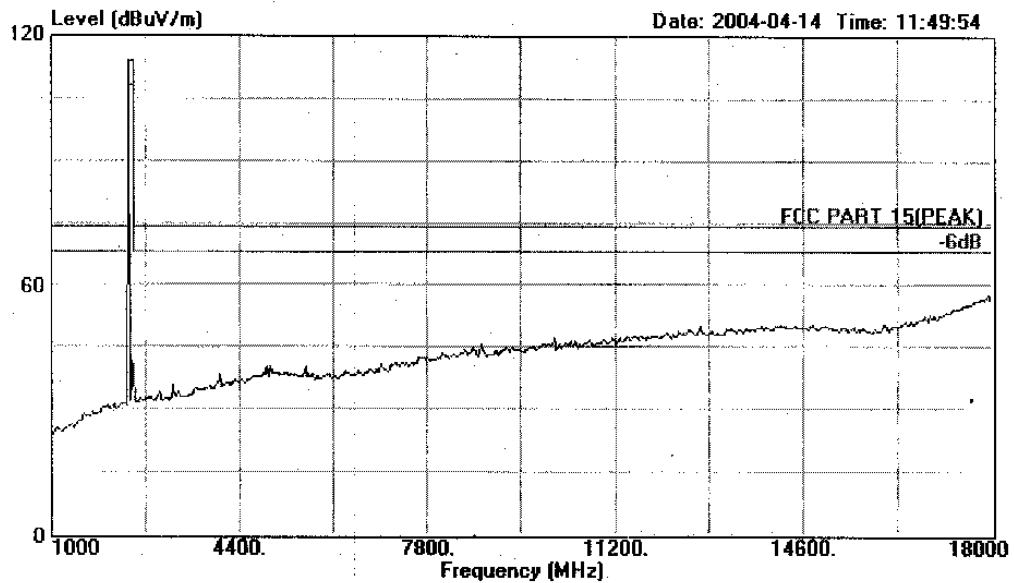

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Base Channel 01




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 34 File#: C:\EMI TEST DATA\C\Continental.EMI

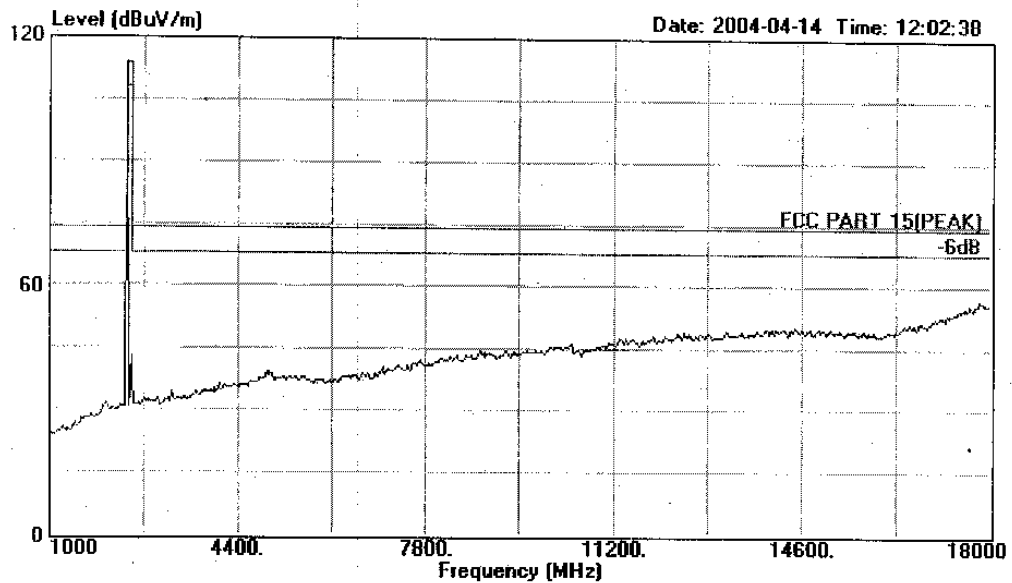

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 31 File#: C:\EMI TEST DATA\C\Continental.EMI

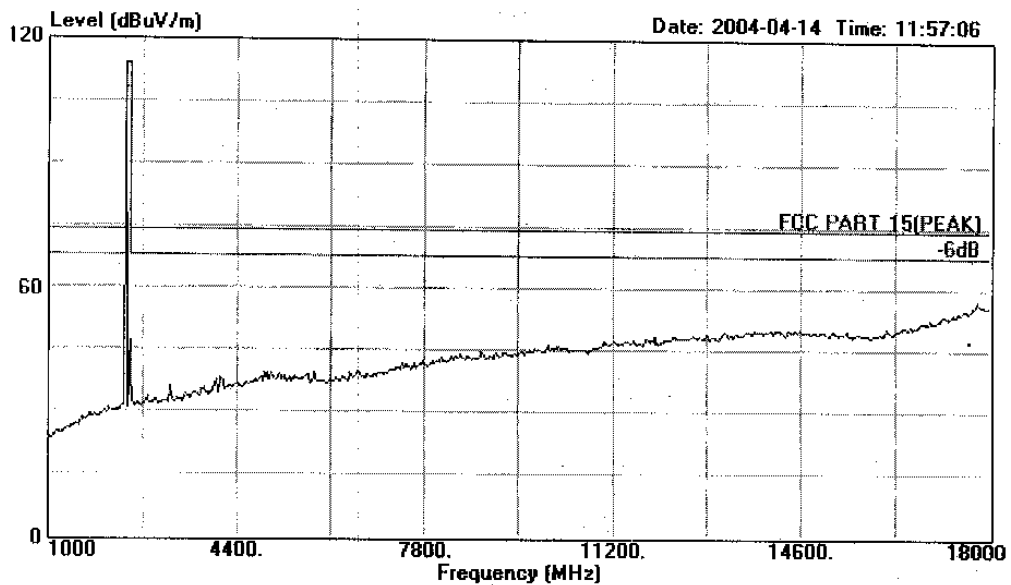

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Base Channel 20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 37 File#: C:\EMI TEST DATA\C\Continental.EMI

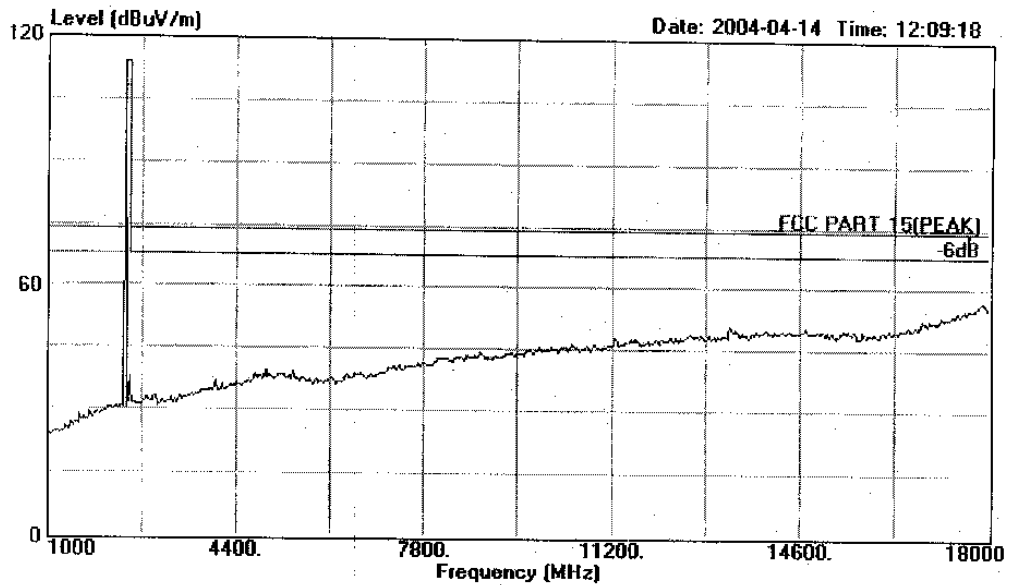

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24' Humi:54%
Memo : Base Channel 40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 40 File#: C:\EMI TEST DATA\C\Continental.EMI

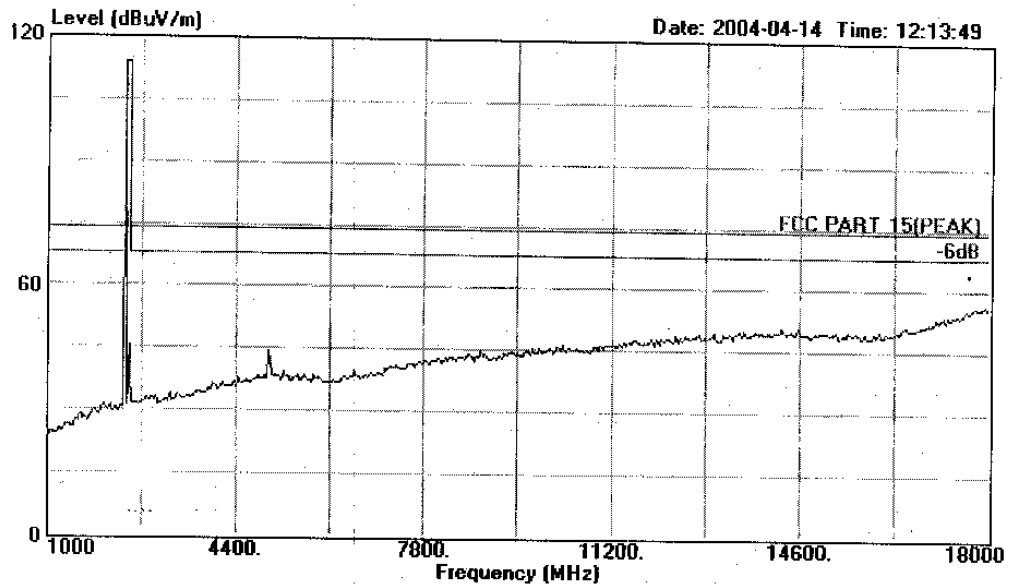

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Temp:24° Humi:54%
Memo : Base Channel 40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 19

File#: C:\EMI TEST DATA\C\Continental.EMI

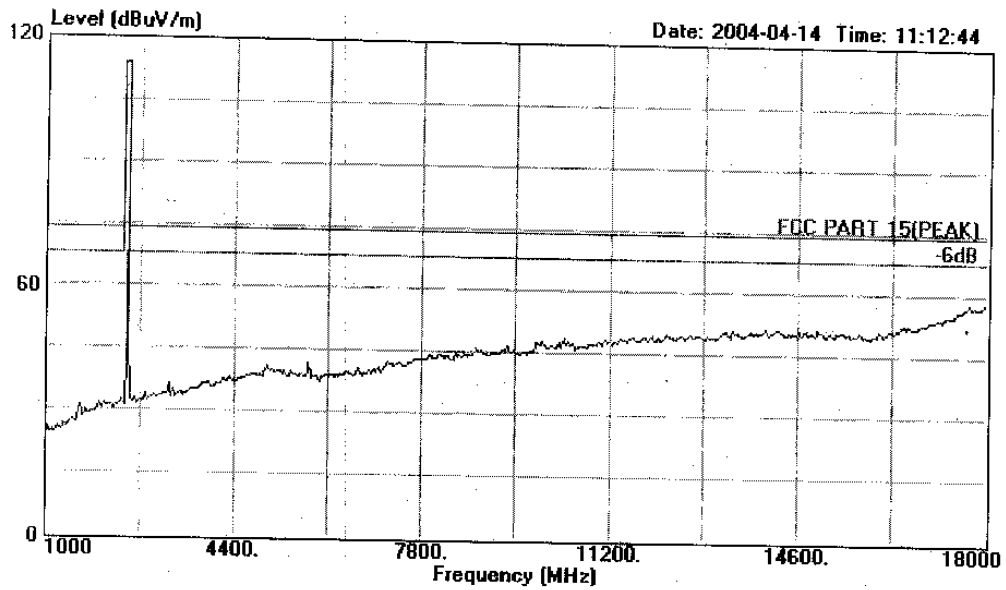

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 22

File#: C:\EMI TEST DATA\C\Continental.EMI

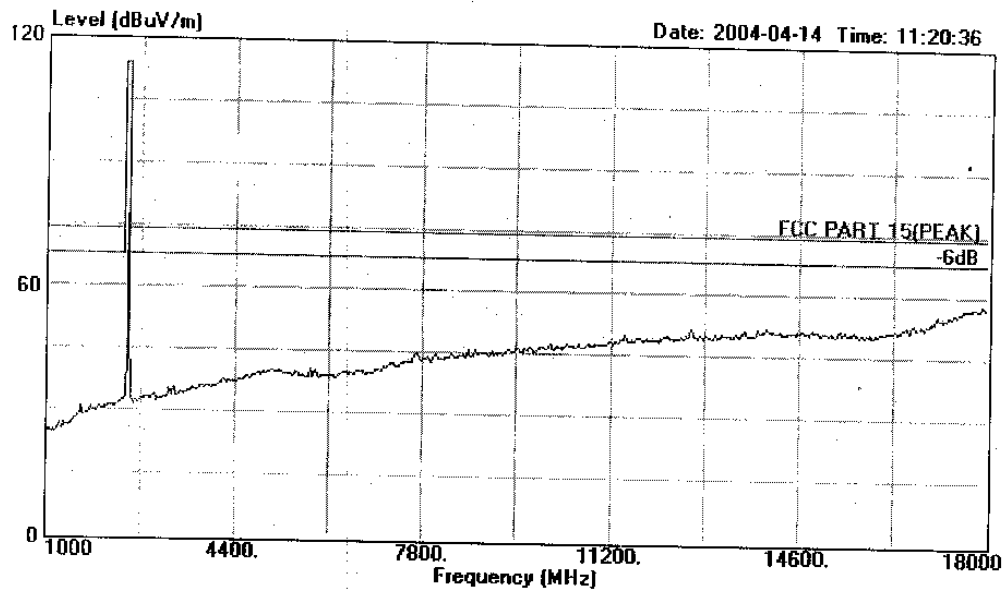

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1
Memo : Temp:24 Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 10

File#: C:\EMI TEST DATA\C\Continental.EMI

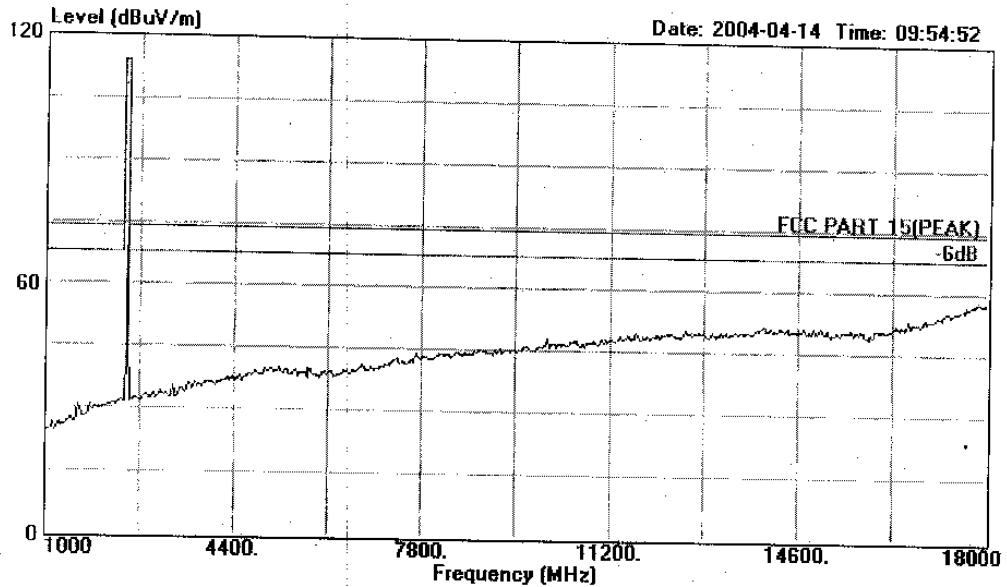

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 7 File#: C:\EMI TEST DATA\C\Continental.EMI

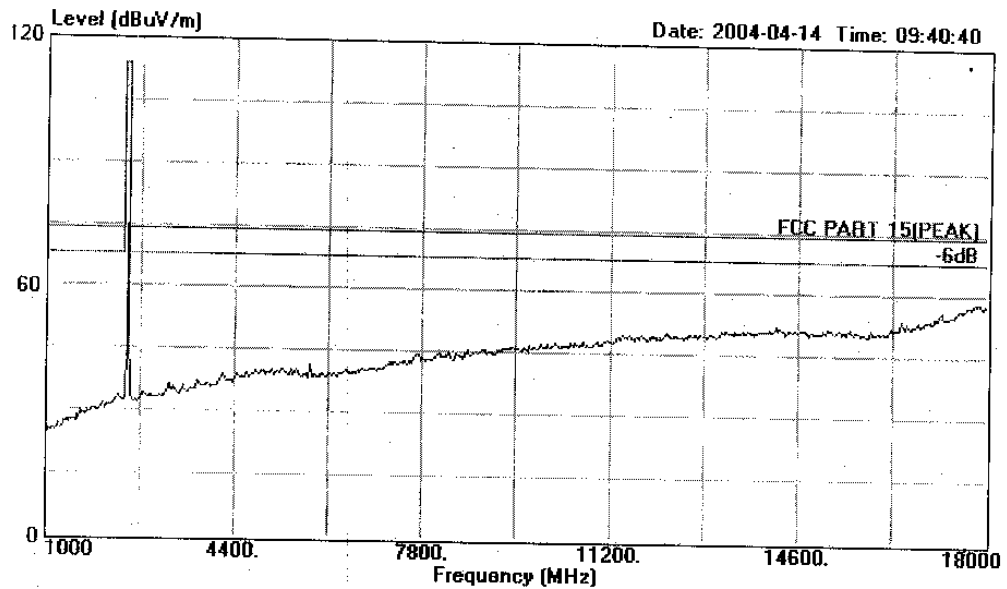

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 13

File#: C:\EMI TEST DATA\C\Continental.EMI

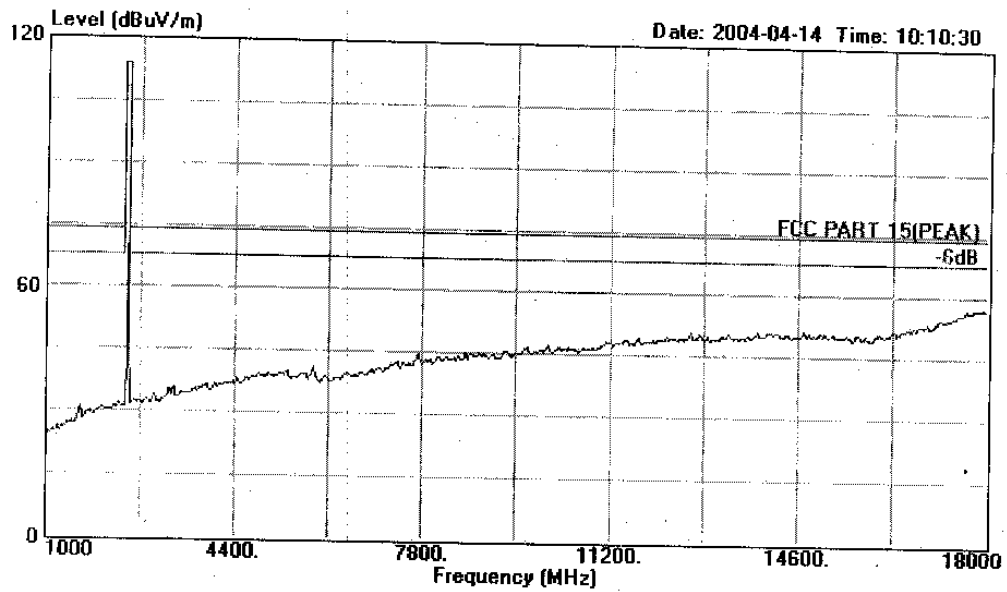

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 16

File#: C:\EMI TEST DATA\C\Continental.EMI

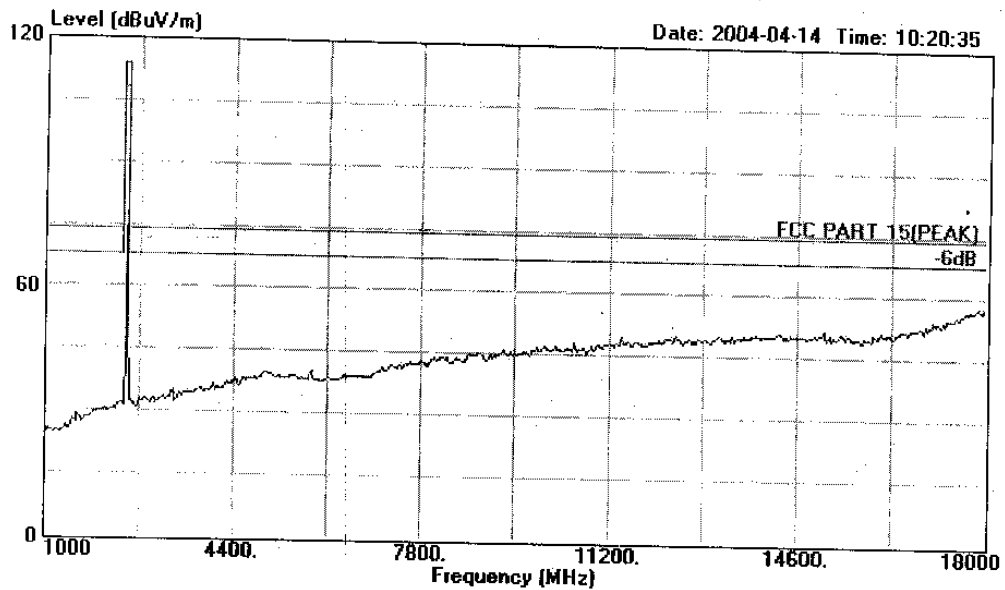

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 53

File#: C:\EMI TEST DATA\C\Continental.EMI

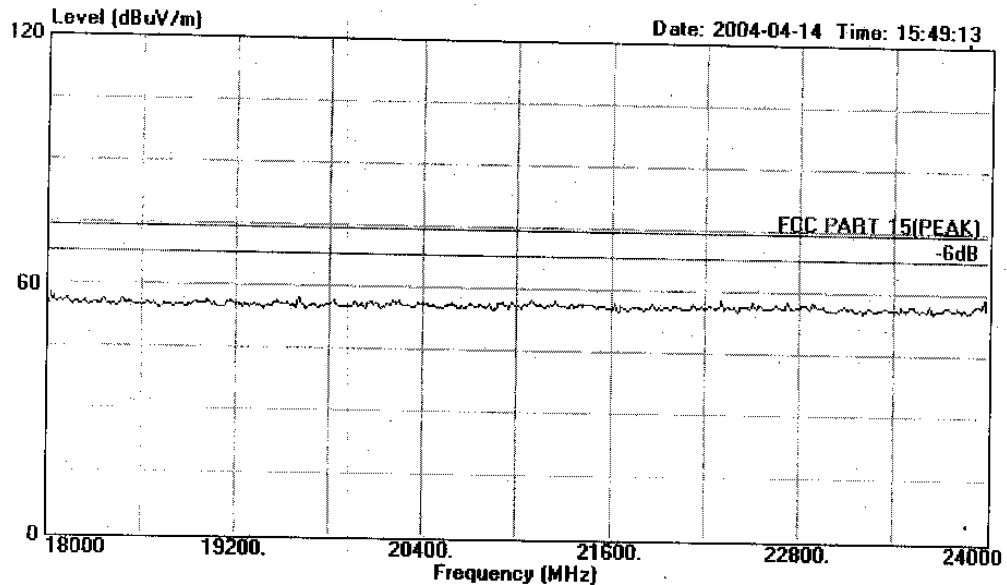

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Base Channel 01
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 54 File#: C:\EMI TEST DATA\C\Continental.EMI

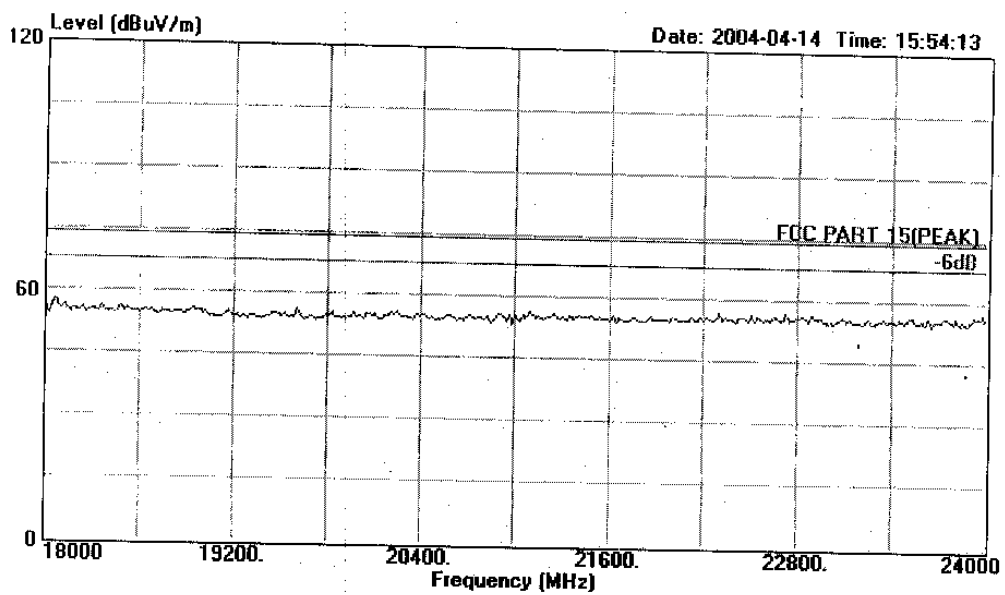

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Base Channel 01
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 51

File#: C:\EMI TEST DATA\C\Continental.EMI

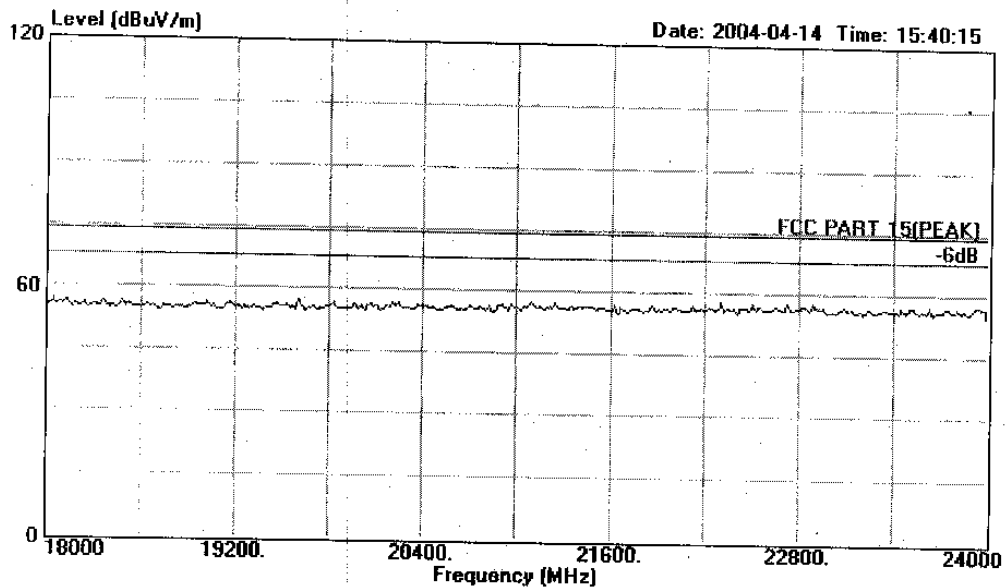

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Base Channel 20
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 52 File#: C:\EMI TEST DATA\C\Continental.EMI

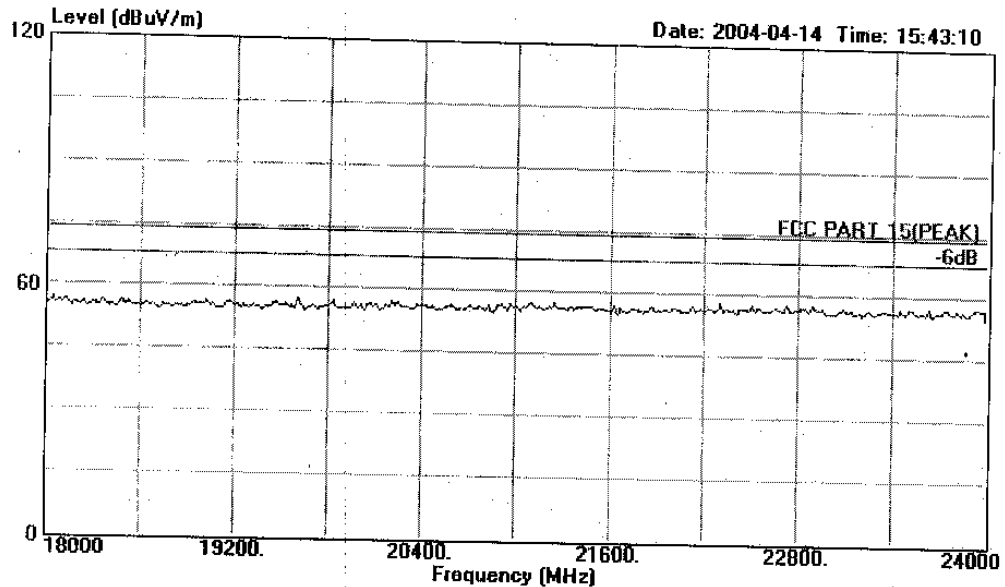

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Base Channel 20
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 50

File#: C:\EMI TEST DATA\C\Continental.EMI

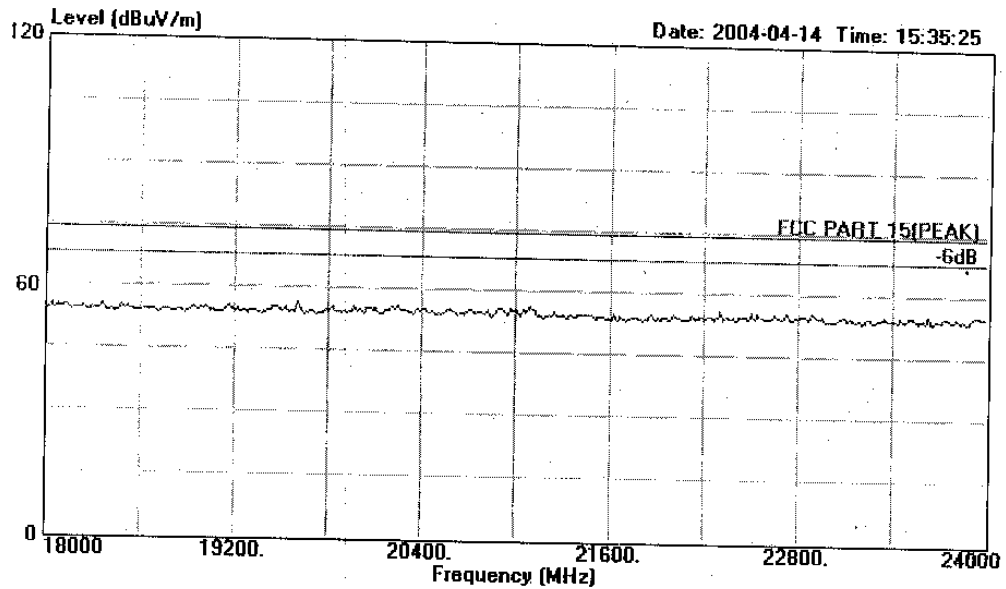

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Base Channel 40
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 49

File#: C:\EMI TEST DATA\C\Continental.EMI

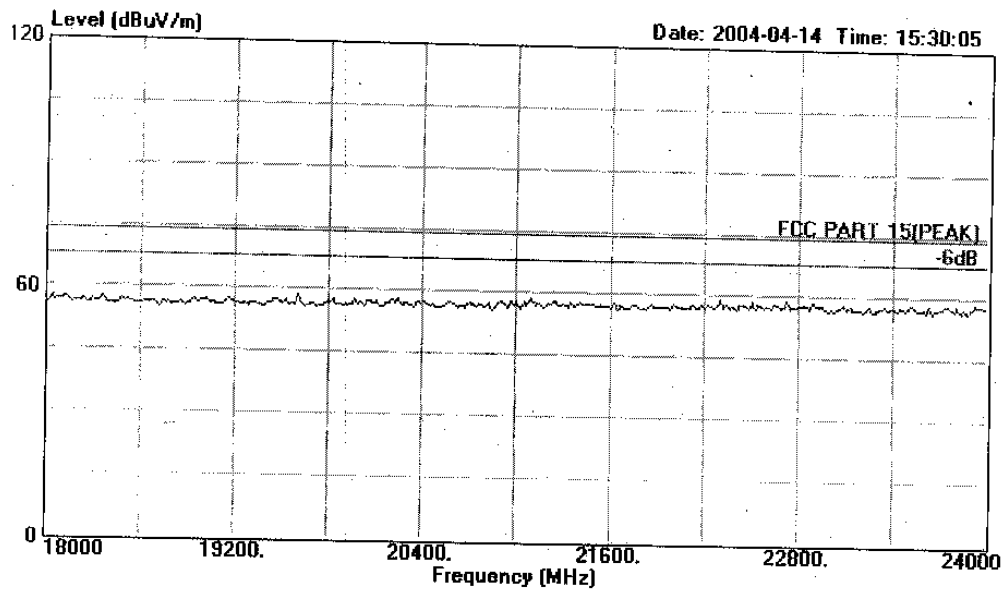

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : Adaptor AC Input 120V/60Hz Output DC10V
Test Engineer : Seco
Memo : Base Channel 40
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 2 File#: C:\EMI TEST DATA\C\Continental.EMI

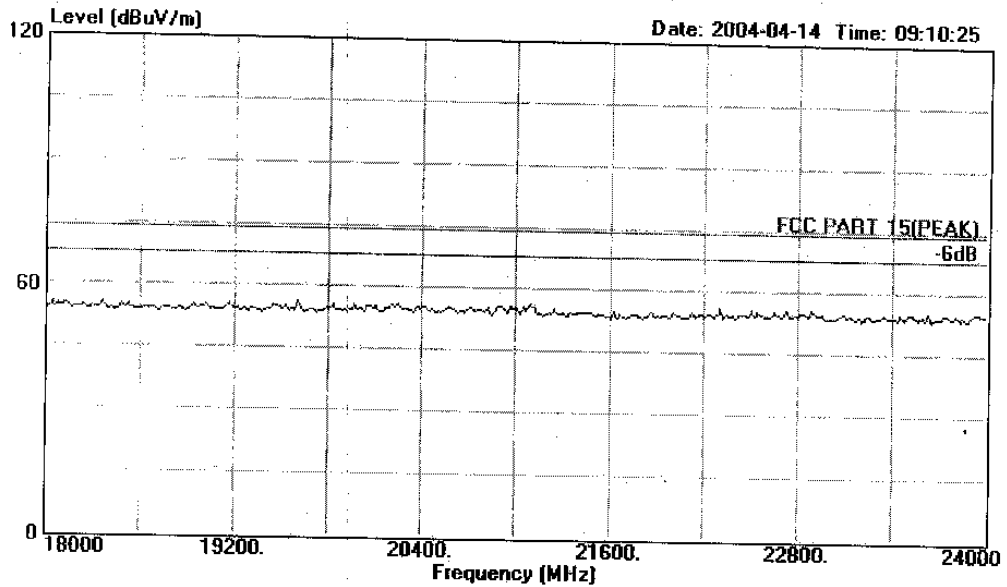

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 1 File#: C:\EMI TEST DATA\C\Continental.EMI

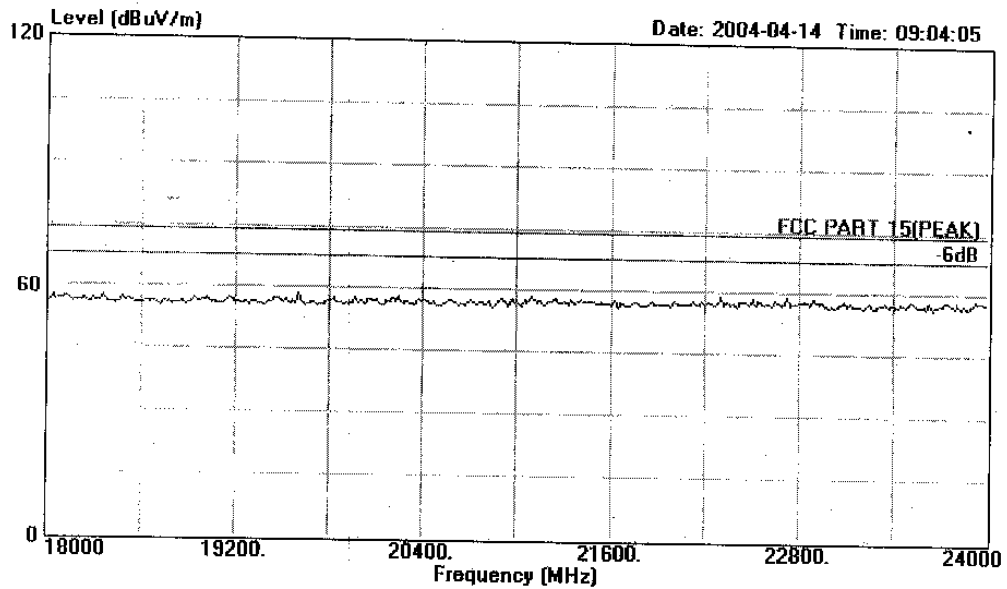

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH1
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 3 File#: C:\EMI TEST DATA\C\Continental.EMI

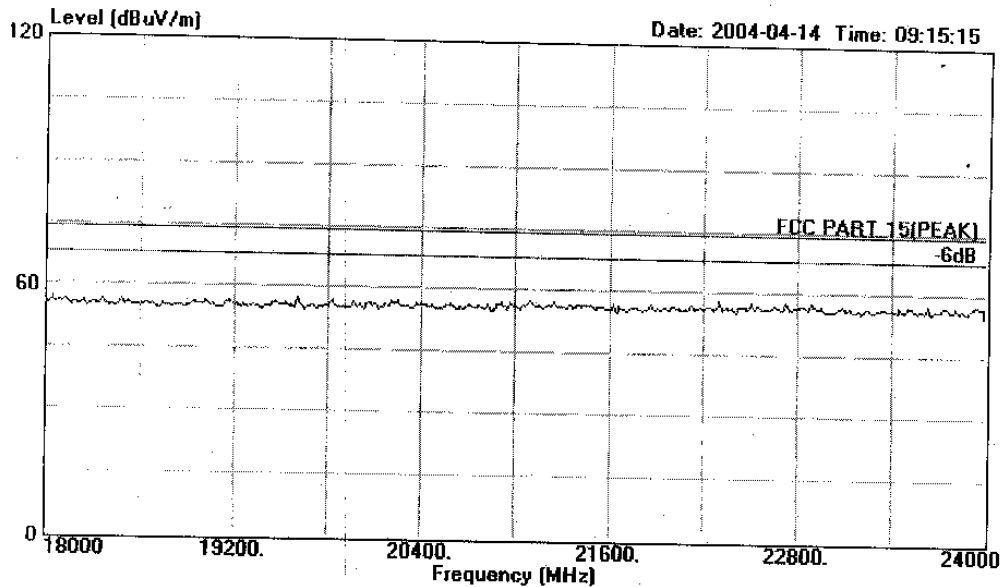

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 4 File#: C:\EMI TEST DATA\C\Continental.EMI

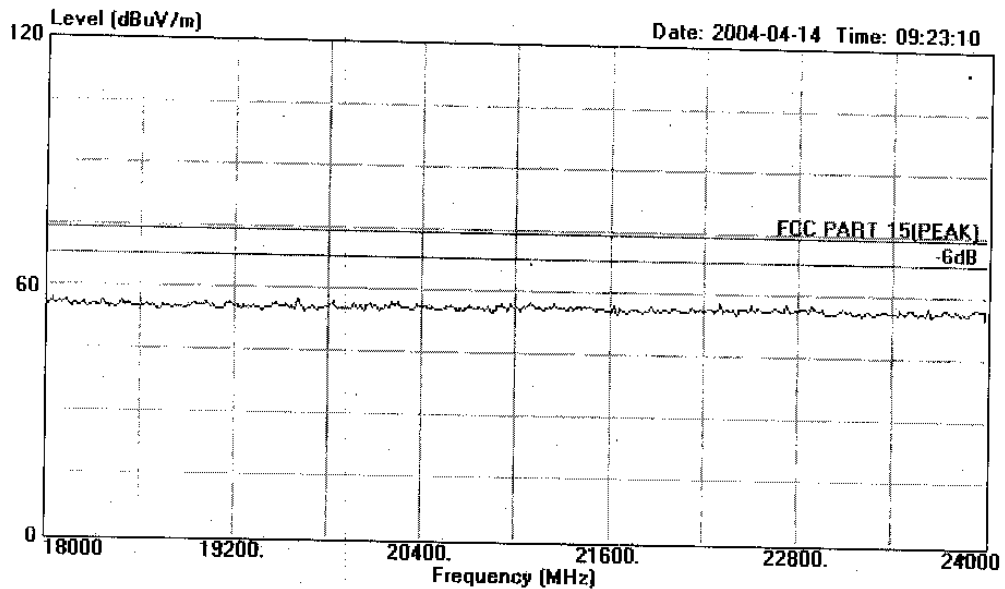

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH20
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 5

File#: C:\EMI TEST DATA\C\Continental.EMI

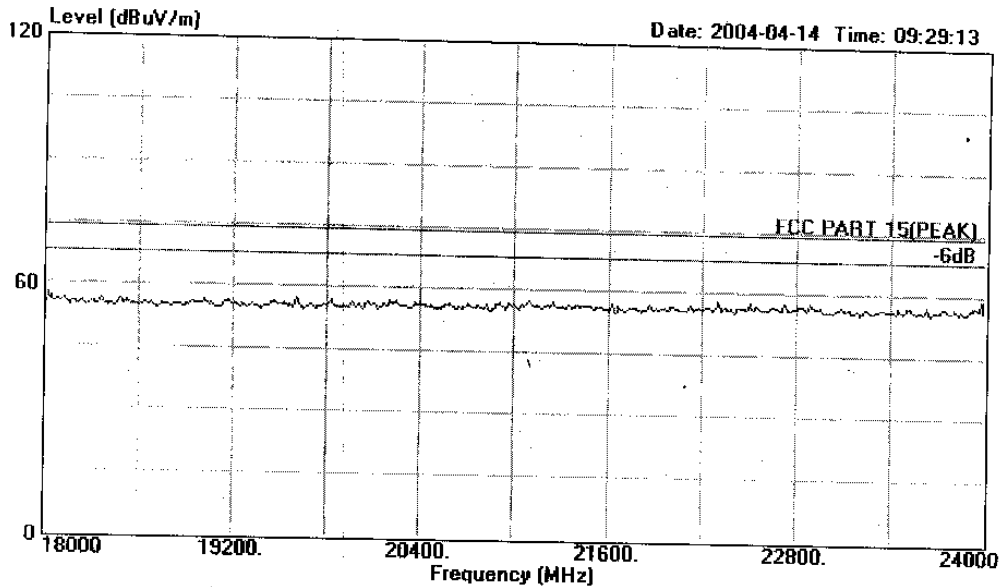

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Cordless Phone w/radio
N/W : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 6

File#: C:\EMI TEST DATA\C\Continental.EMI

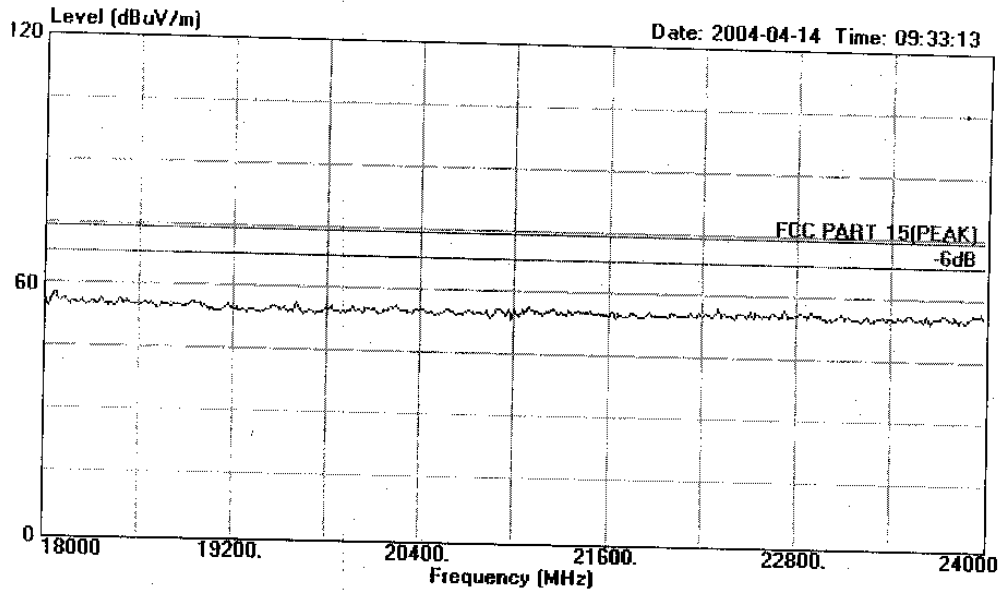

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 311SFACITOR VERTICAL
EUT : 2.4G Cordless Phone w/radio
M/N : GH3062
Power : DC 3.6V
Test Engineer : Seco
Memo : Handset CH40
Memo : Temp:24' Hum:56%