

APPLICATION FOR CERTIFICATION
On Behalf of
Continental Conair Limited

2.4G Cordless Phone w/radio & CD

Model Number: GH3065

Prepared for : Continental Conair Limited
35/F., Standard Chartered Tower, Millennium City,
388 Kwun Tong Road, Kwun Tong, Kowloon, Hong Kong

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F04020
Date of Test : Dec.17, 2003~Feb.04, 2004
Date of Report : Feb.09, 2004

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Tested Supporting System Details.....	1-1
1.3. Channel Frequencies.....	1-2
1.4. Test Facility	1-9
1.5. Test Uncertainty	1-9
2. POWER LINE CONDUCTED EMISSION TEST	2-1
2.1. Test Equipment.....	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Test Limits	2-1
2.4. Configuration of EUT on Test.....	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results.....	2-3
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit	3-2
3.4. EUT Configuration on Test	3-2
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. PHOTOGRAPH	4-1
4.1. Photo of Power Line Conducted Emission Test.....	4-1
4.2. Photos of Radiated Emission Test (In Anechoic Chamber)	4-2

APPENDIX I

(15 pages)

APPENDIX II

(45 pages)

TEST REPORT DECLARATION

Applicant : Continental Conair Limited
 Manufacturer : Telefield Ltd.
 EUT Description : 2.4G Cordless Phone w/radio & CD
 (A) MODEL NO. : GH3065
 (B) SERIAL NO. : F2004020901
 (C) Power Supply : DC 12V Adaptor AC120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C August , 2003.

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.


Date of Test :

Dec.17, 2003~Feb.04, 2004




Jane Dai / Assistant

Prepared by :



Lake Wang / Supervisor

Reviewer :

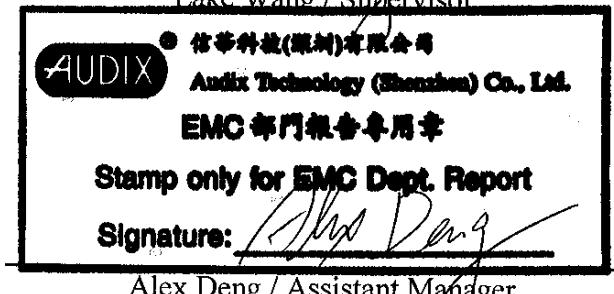

Approved & Authorized Signer :

Name of the Representative of the Responsible Party : _____

Signature :

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : 2.4G Cordless Phone w/radio & CD
Model Number : GH3065
Applicant : Continental Conair Limited
35/F., Standard Chartered Tower,
Millennium City, 388 Kwun Tong Road,
Kwun Tong, Kowloon, Hong Kong
Manufacturer : Telefield Ltd.
Flat D, 2/F., Valiant Industrial Centre,
2-12 Au Pui Wan Street, Fo Tan, N.T., Hong Kong
Date of Test : Dec.17, 2003~Feb.04, 2004

1.2. Tested Supporting System Details

1.2.1. Power Adaptor

Manufacturer : Southwestern Bell Freedom Phone
Model Number : UD-1210
Cable Line : Unshielded, Undetachable, 1.8m

1.2.2. Earphone

Model Number : SH-6BB
Cable Line : Unshielded, Detachable, 1.2m

1.3. Channel Frequencies

CH.	BASE TX	HANDSET TX	CH.	BAST TX	HANDSET TX
1	2400.75	2472.75	21	2403.75	2475.75
2	2400.90	2472.90	22	2403.90	2475.90
3	2401.05	2473.05	23	2404.05	2476.05
4	2401.20	2473.20	24	2404.20	2476.20
5	2401.35	2473.35	25	2404.35	2476.35
6	2401.50	2473.50	26	2404.50	2476.50
7	2401.65	2473.65	27	2404.65	2476.65
8	2401.80	2473.80	28	2404.80	2476.80
9	2401.95	2473.95	29	2404.95	2476.95
10	2402.10	2474.10	30	2405.10	2477.10
11	2402.25	2474.25	31	2405.25	2477.25
12	2402.40	2474.40	32	2405.40	2477.40
13	2402.55	2474.55	33	2405.55	2477.55
14	2402.70	2474.70	34	2405.70	2477.70
15	2402.85	2474.85	35	2405.85	2477.85
16	2403.00	2475.00	36	2406.00	2478.00
17	2403.15	2475.15	37	2406.15	2478.15
18	2403.30	2475.30	38	2406.30	2478.30
19	2403.45	2475.45	39	2406.45	2478.45
20	2403.60	2475.60	40	2406.60	2478.60




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 238 File#: C:\EMI TEST DATA\T\Continental.EMI

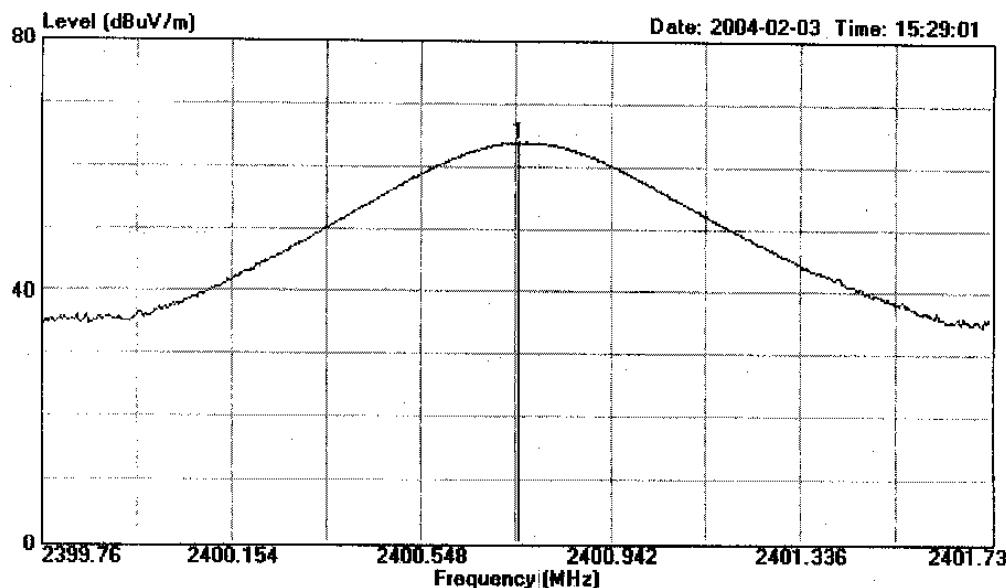

Site : 1# Chamber
 Condition : 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Limit	Read	Cable	Probe	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	
1 2400.750	63.87	-----	-----	32.63	3.20	26.04 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632677

Data#: 239 File#: C:\EMI TEST DATA\T\Continental.EMI

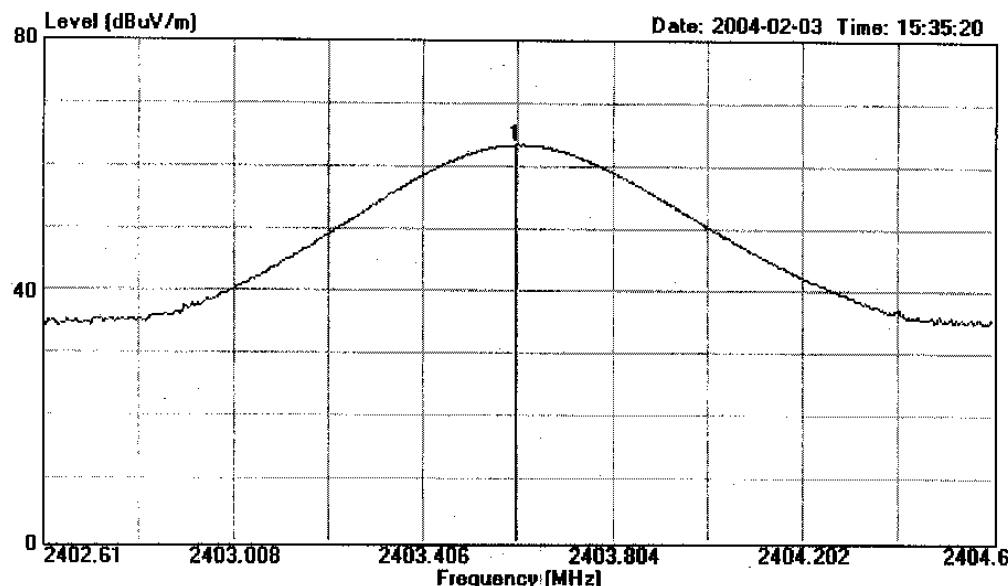

Site : 1# Chamber
 Condition : 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Limit	Read Line	Cable Level	Probe Loss	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 2403.600	63.35	-----	-----	32.07	3.21	28.07	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 240 File#: C:\EMI TEST DATA\T\Continental.EMI

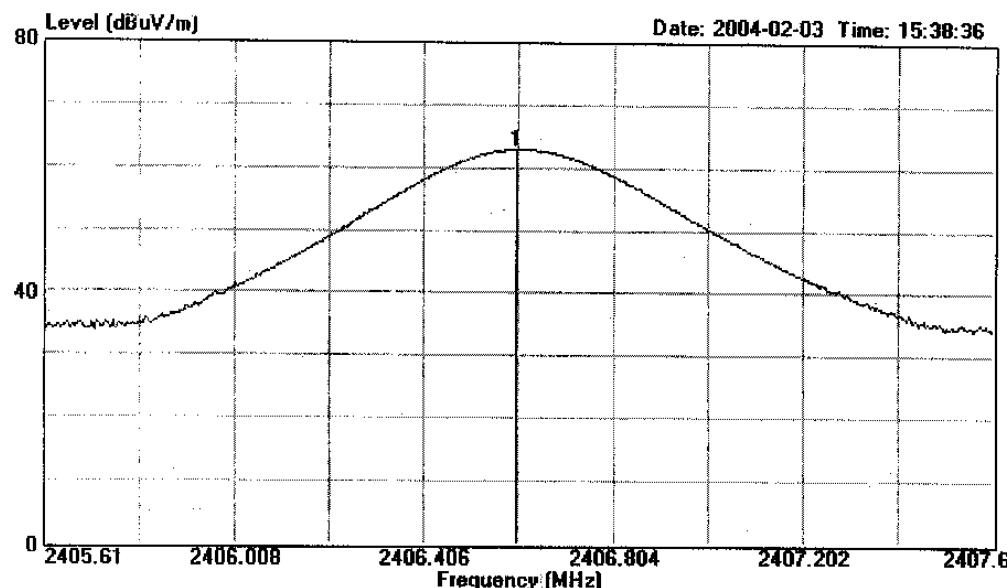

Site : 1# Chamber
 Condition : 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH40
 Memo : Temp:24' Hum:56%

Freq	MHz	Over Limit		Read Line	Cable Level	Probe Loss	Factor	Remark
		Level	Limit					
1	2406.600	62.93	-----	-----	31.65	3.21	28.07	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 241 File#: C:\EMI TEST DATA\T\Continental.EMI

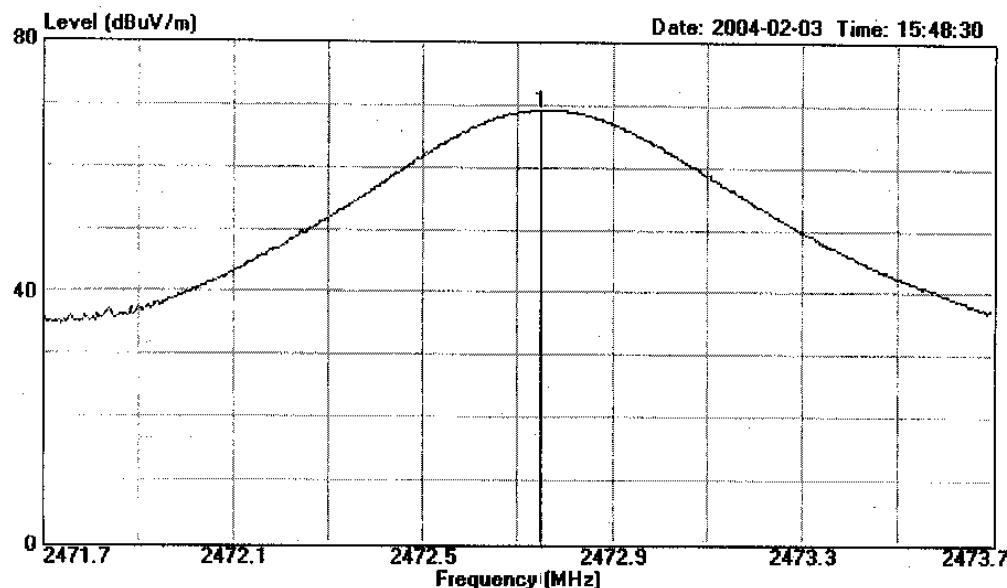

Site : 1# Chamber
 Condition : 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 N/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24' Hum:56%

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		MHz	dB _B V/m	dB	dB _B V/m	dB _B V	
1	2472.750	69.18	-----	37.72	3.26	28.20	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 242 File#: C:\EMI TEST DATA\T\Continental.EMI

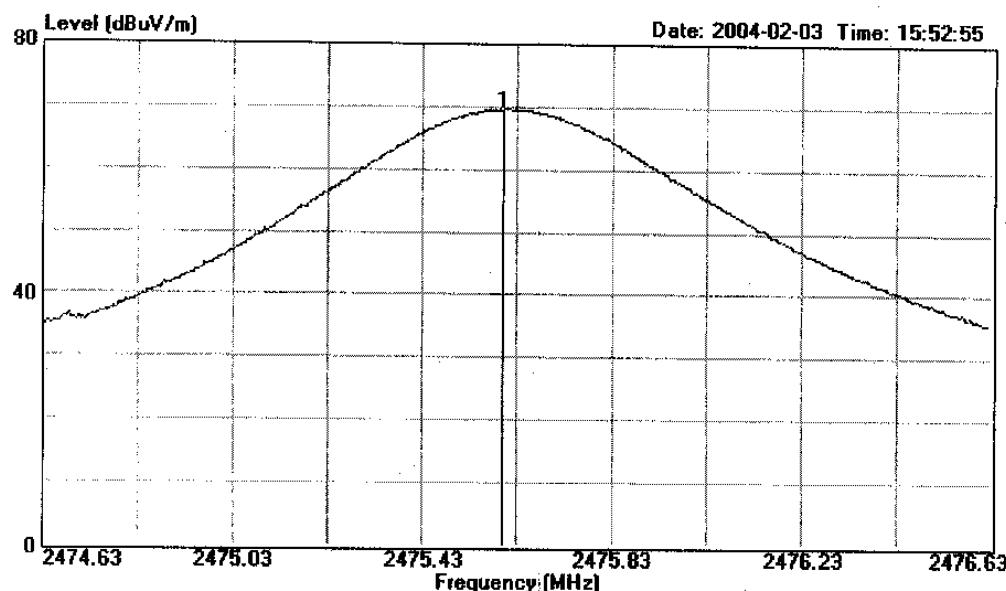

Site : 1# Chamber
 Condition : 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH20
 Memo : Temp:24' Hum:56%

Freq	Level	Over Limit		Read	Cable	Probe	Remark
		Limit	Line				
MHz	dB _{UV/m}	dB	dB _{UV/m}	dB _{UV}	dB	dB	
1 2475.600	69.55	-----	-----	38.09	3.26	28.20	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 243 File#: C:\EMI TEST DATA\T\Continental.EMI

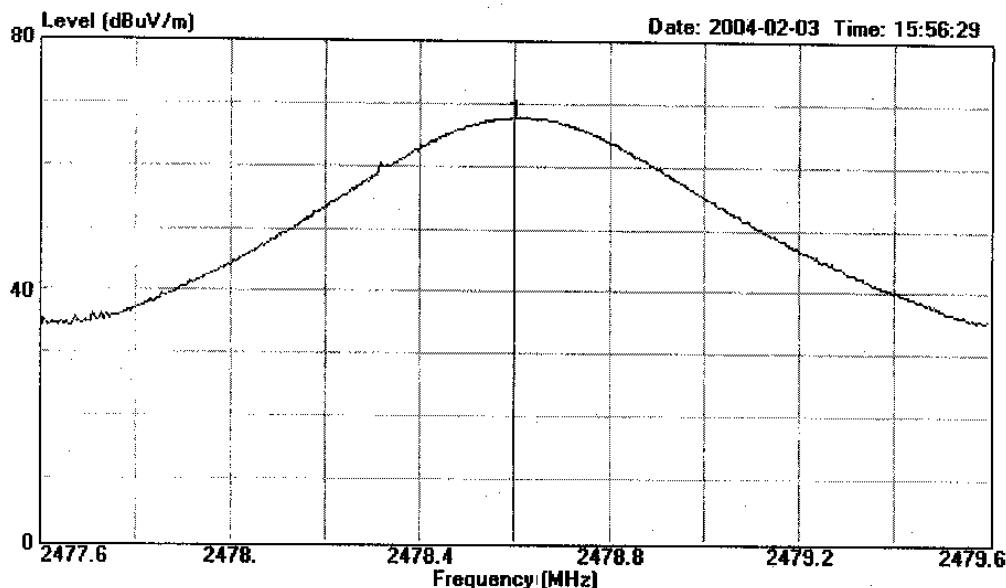

Site : 1# Chamber
 Condition : 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line	Cable Probe			Remark
			Level	Limit	Level	
MHz	dB _{UV} /m	dB	dB _{UV} /m	dB _{UV}	dB	dB
1	2478.600	67.66	-----	-----	36.20	3.26 28.20 Peak

1.4. Test Facility

Site Description

3m Anechoic Chamber : Certificated by FCC, USA
Aug. 15, 2003

EMC Lab. : Certificated by DATech, German
Feb. 02, 2004

Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2003

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.5. Test Uncertainty

Conducted Emission Uncertainty = ± 2.66dB

Radiated Emission Uncertainty = ± 4.26dB

2. POWER LINE CONDUCTED EMISSION TEST


2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	May.31, 03	1 Year
2.	L.I.S.N. #1	Kyoritsu	KNW-407	8-541-4	May.31, 03	1 Year
3.	L.I.S.N. #2	R&S	ESH2-Z5	834066/011	May.31, 03	1 Year
4.	Terminator	EMCO	50Ω	No. 1	May.31, 03	1 Year
5.	Terminator	EMCO	50Ω	No. 2	May.31, 03	1 Year
6.	RF Cable	FUJIKURA	RG-55/U	LISN Cable	Aug.21, 03	1/2 Year
7.	Coaxial Switch	Anritsu	MP59B	M74389	Nov.28, 03	1/2 Year
8.	PC	N/A	586ATXS	N/A	N/A	N/A
9.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

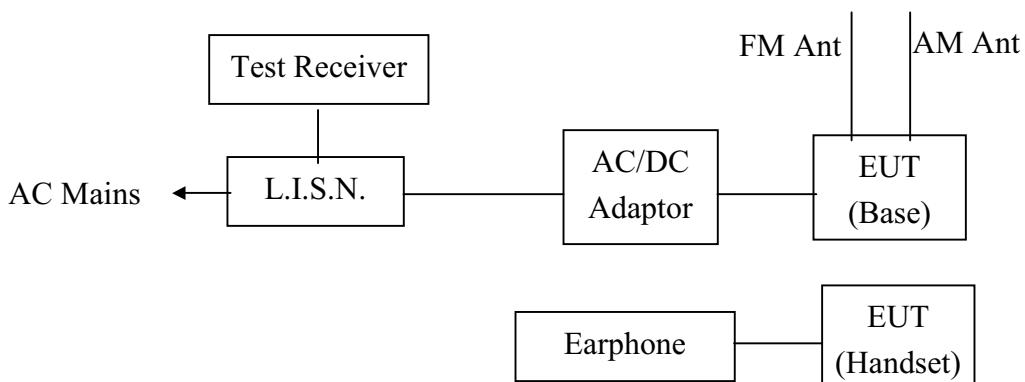

(EUT: 2.4G Cordless Phone w/radio & CD)

2.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. 2.4G Cordless Phone w/radio & CD (EUT)

Model Number	:	GH3065
Serial Number	:	F2004020901
Manufacturer	:	Telefield Ltd.

2.4.2. Support Equipment : As Tested Supporting System Detail, in Section 1.2..

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown as Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work in test mode (Base CD Playing/Base FM 88MHz/
Base FM 98MHz/Base FM 108MHz/Base CH1/Base CH20/Base CH40) and test it.

2.6. Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Power on the EUT and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2001 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7., all the scanning waveforms for Conducted Emission Test are attached in Appendix I.

2.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


All emissions not reported below are too low against the prescribed limits.

Date of Test :	Feb.04, 2004	Temperature :	23°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Base CD Playing
Test Engineer :	Seco		

Frequency (MHz)	Reading (dB μ V)				Limit (dB μ V)	
	VA		VB			
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.153	34.95	31.95	*	*	65.84	55.84
0.159	*	*	35.38	29.38	65.52	55.52
0.189	24.04	19.04	*	*	64.08	54.08
0.191	*	*	27.15	22.15	63.99	53.99
0.269	17.86	10.86	*	*	61.15	51.15
0.274	15.88	7.88	*	*	61.00	51.00
0.282	*	*	17.52	14.52	60.76	50.76
0.385	*	*	7.40	5.40	58.17	48.17
0.404	8.52	5.52	*	*	57.77	47.77
1.840	*	*	5.06	3.06	56.00	46.00
21.490	7.03	5.03	4.60	2.60	60.00	50.00

"*" As the QP value is too low against AV limit, So AV Value had been omitted.

Reviewer:

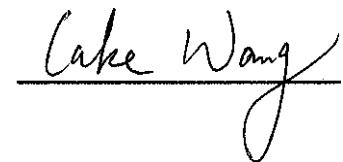

3. RADIATED EMISSION TEST

3.1. Test Equipment


The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May.31, 03	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.31, 03	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep.18, 03	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 13, 04	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Feb.01, 04	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Feb.01, 04	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Feb.01, 04	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Feb.01, 04	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	Nov.28, 03	1/2 Year
12.	Spectrum	Agilent	E4407B	MY41440292	Mar.28, 03	1 Year
13.	Amp	HP	8449B	3008A00863	May.31, 03	1 Year
14.	Antenna	EMCO	3115	9607-4877	Dec. 04, 02	1.5 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

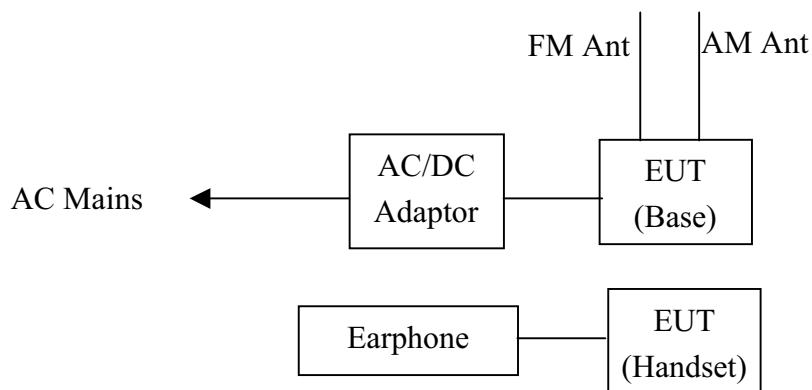

(EUT: 2.4G Cordless Phone w/radio & CD)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

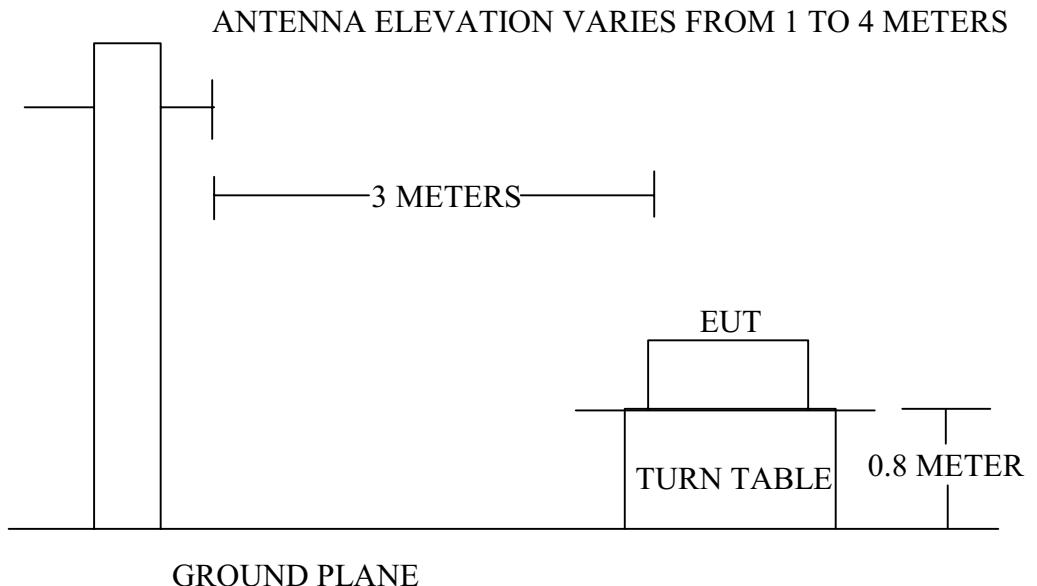

3.3. Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Local Oscillator: 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. 2.4G Cordless Phone w/radio & CD (EUT)

Model Number : GH3065
 Serial Number : F2004020901
 Manufacturer : Telefield Ltd.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown in Section 3.2..
- 3.5.2. Let the EUT work in test modes (Base CD Playing/Base FM 88MHz/
Base FM 98MHz/Base FM 108MHz/Base CH1/Base CH20/
Base CH40/Handset CH1/Handset CH20/Handset CH40) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2001 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

The test modes (Base CD Playing/Base FM 88MHz/Base FM 98MHz/
Base FM 108MHz/Base CH1/Base CH20/Base CH40/Handset CH1/
Handset CH20/Handset CH40) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	Feb. 03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Base CD Playing
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m
85.290	8.44	1.84	16.36	26.64	-13.36	40.00
136.700	11.52	2.37	12.22	26.12	-17.38	43.50
182.290	9.56	2.80	16.99	29.35	-14.15	43.50
279.290	12.88	3.62	17.78	34.28	-11.72	46.00
322.940	13.99	3.95	14.81	32.75	-13.25	46.00
819.580	21.69	7.05	8.38	37.11	-8.89	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 819.580MHz with corrected signal level of 37.11dB μ V/m(Limit is 46.00 dB μ V/m) when the antenna was at horizontal polarization and at 1.8m high and the turn table was at 311°.
4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer : Labe Wang

Date of Test :	Feb. 03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Base CD Playing
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m
54.250	6.69	1.44	11.62	19.75	-20.25	40.00
125.060	12.21	2.25	7.32	21.78	-21.72	43.50
181.320	8.44	2.81	10.20	21.45	-22.05	43.50
352.040	14.77	4.20	4.93	23.90	-22.10	46.00
528.580	19.06	5.94	5.99	30.99	-15.01	46.00
819.580	22.06	7.05	6.90	36.01	-9.99	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 819.580MHz with corrected signal level of 36.01dB μ V/m(Limit is 46.00 dB μ V/m) when the antenna was at vertical polarization and at 1.1m high and the turn table was at 216 ° .
4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer : Abe Wang

Date of Test :	Feb. 03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Base FM 108MHz
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m
30.000	16.74	1.05	6.10	23.89	-16.12	40.00
117.700	10.97	2.23	25.96	39.16	-4.34	43.50
182.290	9.56	2.80	21.03	33.39	-10.11	43.50
300.630	13.36	3.86	10.34	27.56	-18.44	46.00
354.950	15.61	4.22	8.69	28.52	-17.48	46.00
819.580	21.76	6.93	8.60	37.29	-8.71	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 117.700MHz with corrected signal level of 39.16dB μ V/m(Limit is 43.50 dB μ V/m) when the antenna was at horizontal polarization and at 1.8m high and the turn table was at 312°.
4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer : Abe Wang

Date of Test :	Feb. 03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Base FM 108MHz
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m
31.940	13.50	1.08	7.53	22.12	-17.88	40.00
58.130	5.59	1.48	14.43	21.50	-18.50	40.00
118.700	11.18	2.23	25.34	38.75	-4.75	43.50
435.460	16.86	4.93	6.71	28.50	-17.50	46.00
626.550	19.62	6.17	3.41	29.20	-16.80	46.00
820.550	22.06	7.05	7.26	36.37	-9.63	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 118.700MHz with corrected signal level of 38.75dB μ V/m(Limit is 43.50 dB μ V/m) when the antenna was at vertical polarization and at 1.1m high and the turn table was at 0°.
4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer : Lake Wang

Date of Test :	Feb. 03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Base CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m
43.280	11.88	1.24	10.58	23.70	-16.30	40.00
95.300	8.55	1.99	22.49	33.03	-10.47	43.50
145.130	12.00	2.48	10.32	24.80	-18.70	43.50
375.440	15.96	4.36	6.30	26.61	-19.39	46.00
802.213	21.56	7.12	12.21	40.88	-5.12	46.00
822.490	21.76	7.12	8.56	37.45	-8.55	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 802.213MHz with corrected signal level of 40.88dB μ V/m(Limit is 46.00 dB μ V/m) when the antenna was at horizontal polarization and at 1.9m high and the turn table was at 300°.
4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer : Labe Wang

Date of Test :	Feb. 03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Base CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m
53.280	6.90	1.44	15.35	23.70	-16.30	40.00
95.300	9.72	2.01	22.30	34.03	-9.47	43.50
155.130	10.27	2.62	11.91	24.80	-18.70	43.50
371.440	15.01	4.37	7.23	26.61	-19.39	46.00
802.213	21.17	7.04	13.67	41.88	-4.12	46.00
822.490	22.26	7.12	8.07	37.45	-8.55	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 802.213MHz with corrected signal level of 41.88dB μ V/m(Limit is 46.00 dB μ V/m) when the antenna was at vertical polarization and at 1.0m high and the turn table was at 0°.
4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer : Labe Wang

Date of Test : Dec. 18, 2003 Temperature : 24°C
 EUT : 2.4G Cordless Phone w/radio & CD Humidity : 56%
 Model No. : GH3065 Test Mode : Base CH1
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1629.000	25.73	2.68	9.08	37.49	-16.51	54.00	Average
2400.750	28.04	3.20	26.31	57.55	-36.45	94.00	Average
3278.000	30.03	3.82	1.19	35.04	-18.96	54.00	Average
4801.200	33.01	4.63	7.25	44.89	-9.11	54.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1629.000	25.73	2.68	8.10	36.51	-37.49	74.00	Peak
2400.750	28.04	3.20	29.31	60.55	-53.45	114.00	Peak
3278.000	30.03	3.82	7.82	41.67	-32.33	74.00	Peak
4801.200	33.01	4.63	9.25	46.89	-27.11	74.00	Peak

- Remark: 1. All readings are Peak and Average values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : Labe Wang

Date of Test :	Dec. 18, 2003	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	56%
Model No. :	GH3065	Test Mode :	Base CH1
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1612.000	25.66	2.66	6.41	34.73	-19.27	54.00	Average
2400.750	28.04	3.20	24.89	56.13	-37.87	94.00	Average
3295.000	30.08	3.83	12.27	46.48	-7.82	54.00	Average
4094.000	32.30	4.26	2.16	38.72	-15.28	54.00	Average
4801.200	33.01	4.63	10.01	47.65	-6.35	54.00	Average
6576.000	33.91	5.59	2.00	41.50	-12.50	54.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1612.000	25.66	2.66	9.41	37.73	-36.27	74.00	Peak
2400.750	28.04	3.20	32.63	63.87	-50.13	114.00	Peak
3295.000	30.08	3.83	8.52	42.43	-31.57	74.00	Peak
4094.000	32.30	4.26	5.16	41.72	-32.28	74.00	Peak
4801.200	33.01	4.63	17.01	54.65	-19.35	74.00	Peak
6576.000	33.91	5.59	6.00	45.50	-28.50	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : Lake Wang

Date of Test :	Dec. 18, 2003	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	56%
Model No. :	GH3065	Test Mode :	Base CH20
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1612.000	25.66	2.66	8.59	36.91	-17.09	54.00	Average
2403.600	28.07	3.21	29.47	60.75	-33.25	94.00	Average
3295.000	30.08	3.83	3.69	37.60	-16.40	54.00	Average
4807.700	33.01	4.63	8.99	46.63	-7.37	54.00	Average
6576.000	33.91	5.59	2.56	42.06	-11.94	54.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1612.000	25.66	2.66	9.59	37.91	-36.09	74.00	Peak
2403.600	28.07	3.21	31.47	62.75	-51.25	114.00	Peak
3295.000	30.08	3.83	4.69	38.60	-35.40	74.00	Peak
4807.700	33.01	4.63	11.99	49.63	-24.37	74.00	Peak
6576.000	33.91	5.59	4.56	44.06	-29.94	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : Labe Wang

Date of Test : Dec. 18, 2003 Temperature : 24°C
 EUT : 2.4G Cordless Phone w/radio & CD Humidity : 56%
 Model No. : GH3065 Test Mode : Base CH20
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1578.000	25.52	2.64	11.70	39.86	-14.14	54.00	Average
2403.600	28.07	3.21	25.52	56.80	-37.20	94.00	Average
3295.000	30.08	3.83	4.88	38.79	-15.21	54.00	Average
4807.700	33.01	4.63	10.08	47.72	-6.28	54.00	Average
6576.000	33.91	5.59	3.35	42.85	-11.15	54.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1578.000	25.52	2.64	14.70	42.86	-31.14	74.00	Peak
2403.600	28.07	3.21	32.07	63.35	-50.65	114.00	Peak
3295.000	30.08	3.83	7.88	41.79	-32.21	74.00	Peak
4807.700	33.01	4.63	19.08	56.72	-17.28	74.00	Peak
6576.000	33.91	5.59	6.35	45.85	-28.15	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : Labe Wang

Date of Test :	Dec. 18, 2003	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	56%
Model No. :	GH3065	Test Mode :	Base CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1629.000	25.73	2.68	10.08	38.49	-15.51	54.00	Average
2406.600	28.07	3.21	29.27	60.55	-33.45	94.00	Average
3278.000	30.03	3.82	3.19	37.04	-16.96	54.00	Average
4812.200	33.01	4.63	11.25	48.89	-5.11	54.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1612.000	25.66	2.66	9.59	37.91	-36.09	74.00	Peak
2406.600	28.07	3.21	31.47	62.75	-51.25	114.00	Peak
3295.000	30.08	3.83	4.69	38.60	-35.40	74.00	Peak
4812.900	33.01	4.63	11.99	49.63	-24.37	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : labe Wang

Date of Test : Dec. 18, 2003 Temperature : 24°C
 EUT : 2.4G Cordless Phone w/radio & CD Humidity : 56%
 Model No. : GH3065 Test Mode : Base CH40
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1578.000	25.52	2.64	15.70	43.86	-10.14	54.00	Average
2406.600	28.07	3.21	27.15	58.43	-35.57	94.00	Average
3210.000	29.82	3.78	5.41	39.01	-14.99	54.00	Average
4813.900	33.01	4.63	10.05	47.69	-6.31	54.00	Average
6576.000	33.91	5.59	5.31	44.81	-9.19	54.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1578.000	25.52	2.64	17.70	45.86	-28.14	74.00	Peak
2406.600	28.07	3.21	31.65	62.93	-51.07	114.00	Peak
3210.000	29.82	3.78	7.41	41.01	-32.99	74.00	Peak
4813.900	33.01	4.63	19.05	56.69	-17.31	74.00	Peak
6576.000	33.91	5.59	7.31	46.81	-27.19	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : Labe Wang

Date of Test :	Feb.03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Handset CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m
31.940	15.60	1.07	6.68	23.35	-16.65	40.00
153.190	11.40	2.57	8.94	22.91	-20.59	43.50
350.100	15.60	4.19	4.62	24.41	-21.59	46.00
558.650	19.34	6.15	4.01	29.50	-16.50	46.00
658.560	19.86	6.36	3.23	29.45	-16.55	46.00
826.213	21.70	7.35	12.60	41.65	-4.35	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 826.213MHz with corrected signal level of 41.65dB μ V/m(Limit is 46.00 dB μ V/m) when the antenna was at horizontal polarization and at 1.6m high and the turn table was at 316°.
4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer : Cabe Wang

Date of Test :	Feb.03, 2004	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	54%
Model No. :	GH3065	Test Mode :	Handset CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m
30.970	15.42	1.05	5.67	22.14	-17.86	40.00
140.580	11.95	2.41	5.75	20.11	-23.39	43.50
268.620	13.62	3.46	5.50	22.58	-23.42	46.00
432.550	16.81	4.89	4.62	26.32	-19.68	46.00
665.350	20.26	6.40	3.39	30.04	-15.96	46.00
826.213	22.51	7.35	12.62	42.48	-3.52	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
3. The worst emission was detected at 826.213MHz with corrected signal level of 42.48dB μ V/m(Limit is 46.00 dB μ V/m) when the antenna was at vertical polarization and at 1.1m high and the turn table was at 0°.
4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer : Lake Wang

Date of Test : Dec. 17, 2003 Temperature : 24°C
 EUT : 2.4G Cordless Phone w/radio & CD Humidity : 56%
 Model No. : GH3065 Test Mode : Handset CH1
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
2472.750	28.20	3.26	28.34	59.80	-34.20	94.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
2472.750	28.20	3.26	34.34	65.80	-48.20	114.00	Peak

- Remark: 1. All readings are Peak and Average values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : (abe Wang)

Date of Test :	Dec. 17, 2003	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	56%
Model No. :	GH3065	Test Mode :	Handset CH1
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading dB μ V	Emission Level dB μ V/m	Over dB	Limits dB μ V/m	Remark
1629.800	25.73	2.68	12.00	40.41	-13.59	54.00	Average
2472.750	28.20	3.26	29.74	61.20	-32.80	94.00	Average


Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading dB μ V	Emission Level dB μ V/m	Over dB	Limits dB μ V/m	Remark
1629.800	25.73	2.68	17.69	46.10	-27.90	74.00	Peak
2475.750	28.20	3.26	37.54	69.00	-45.00	114.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

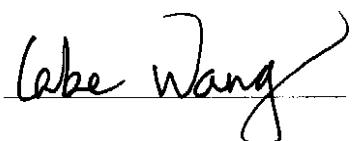

Date of Test : Dec. 17, 2003 Temperature : 24°C
 EUT : 2.4G Cordless Phone w/radio & CD Humidity : 56%
 Model No. : GH3065 Test Mode : Handset CH20
 Test Engineer: Seco

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
2475.600	28.20	3.26	28.64	60.10	-33.90	94.00	Average


Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
2475.600	28.20	3.26	33.44	64.90	-49.10	114.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

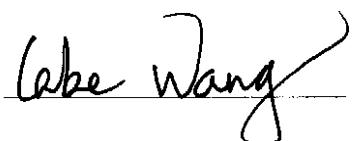

Date of Test :	Dec. 17, 2003	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	56%
Model No. :	GH3065	Test Mode :	Handset CH20
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1650.400	25.81	2.69	11.60	40.10	-13.90	54.00	Average
2475.600	28.20	3.26	27.64	59.10	-34.90	94.00	Average


Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB μ V	Emission Level Vertical dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1650.400	25.81	2.69	17.10	45.60	-28.40	74.00	Peak
2475.600	28.20	3.26	38.09	69.55	-44.45	114.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer :

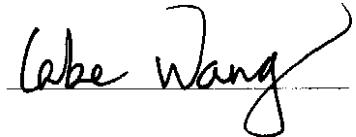

Date of Test :	Dec. 17, 2003	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	56%
Model No. :	GH3065	Test Mode :	Handset CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
2478.600	28.20	3.26	28.14	59.60	-34.40	94.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
2478.600	28.20	3.26	33.64	65.10	-48.90	114.00	Peak

- Remark: 1. All readings are Peak and Average values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : labe Wang

Date of Test :	Dec. 17, 2003	Temperature :	24°C
EUT :	2.4G Cordless Phone w/radio & CD	Humidity :	56%
Model No. :	GH3065	Test Mode :	Handset CH40
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading dB μ V	Emission Level dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1652.400	25.81	2.69	12.70	41.20	-12.80	54.00	Average
2478.600	28.20	3.26	28.84	60.30	-33.70	94.00	Average

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading dB μ V	Emission Level dB μ V/m	Over Limits dB	Limits dB μ V/m	Remark
1652.400	25.81	2.69	18.70	47.20	-26.80	74.00	Peak
2478.600	28.20	3.26	36.20	67.66	-46.34	114.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading


3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : Abe Wang



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:23:06

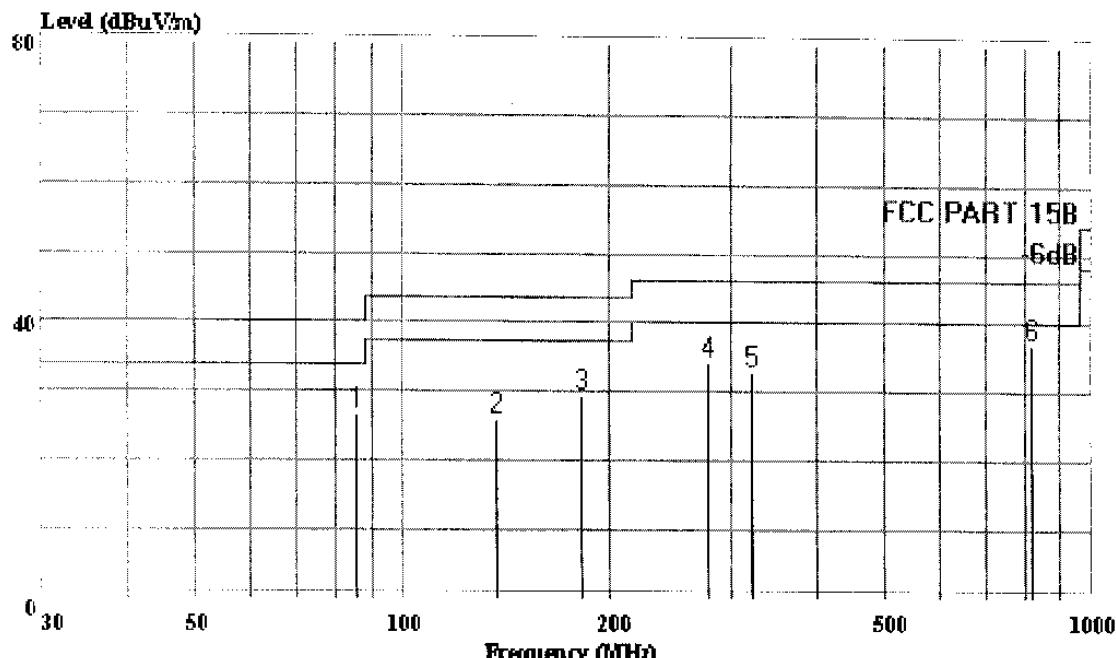

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : CD Playing
 : AntPos:1.8m TablePos:311'


Page: 1

Freq	Level	Limit	Over	Read	Cable	Probe	
		Line	Limit	Level	Loss	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	
1	85.290	26.64	40.00	-13.36	16.36	1.84	8.44
2	136.700	26.12	43.50	-17.38	12.22	2.37	11.52
3	182.290	29.35	43.50	-14.15	16.99	2.80	9.56
4	279.290	34.28	46.00	-11.72	17.78	3.62	12.88
5	322.940	32.75	46.00	-13.25	14.81	3.95	13.99
6	819.580	37.11	46.00	-8.89	8.38	7.05	21.69



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 26 File#: Continental.EMI Date: 2004-02-03 Time: 21:27:36

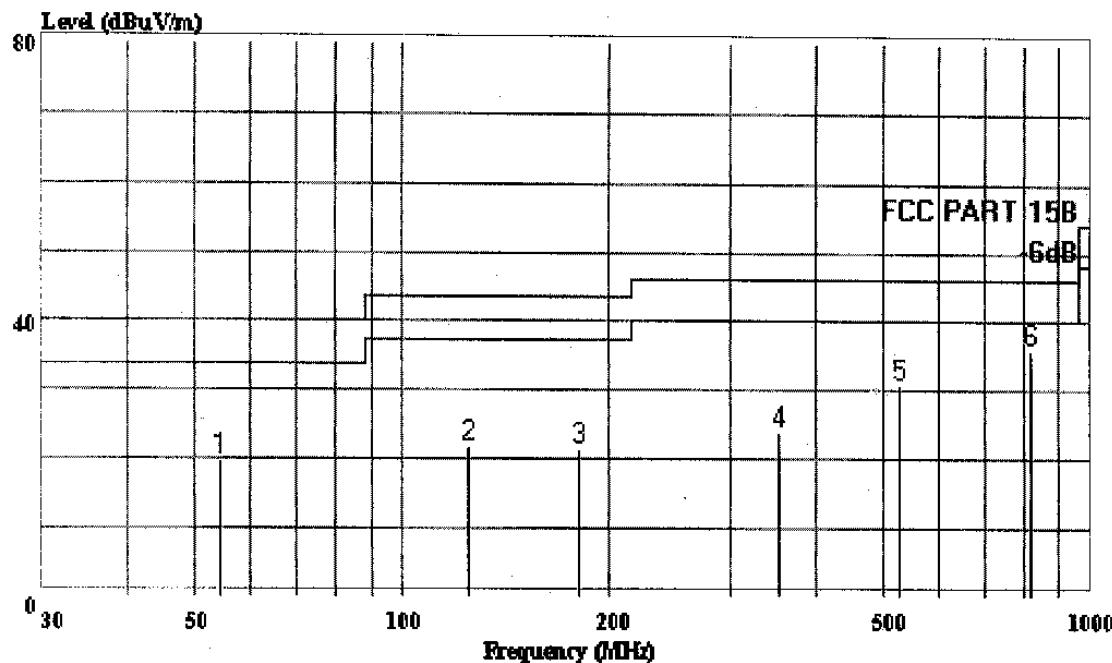

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2.598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : CD Playing
 : AntPos:1.1m TablePos:216'

Page: 1


		Limit	Over	Read	Cable	Probe
Freq	Level	Line	Limit	Level	Loss	Factor
MHz	dBuV/m	dBuV/m		dB	dB	dB
1	54.250	19.75	40.00	-20.25	11.62	1.44
2	125.060	21.78	43.50	-21.72	7.32	2.25
3	181.320	21.45	43.50	-22.05	10.20	2.81
4	352.040	23.90	46.00	-22.10	4.93	4.20
5	528.580	30.99	46.00	-15.01	5.99	5.94
6	819.580	36.01	46.00	-9.99	6.90	7.05



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: 24 File#: Continental.EMI Date: 2004-02-03 Time: 21:19:52

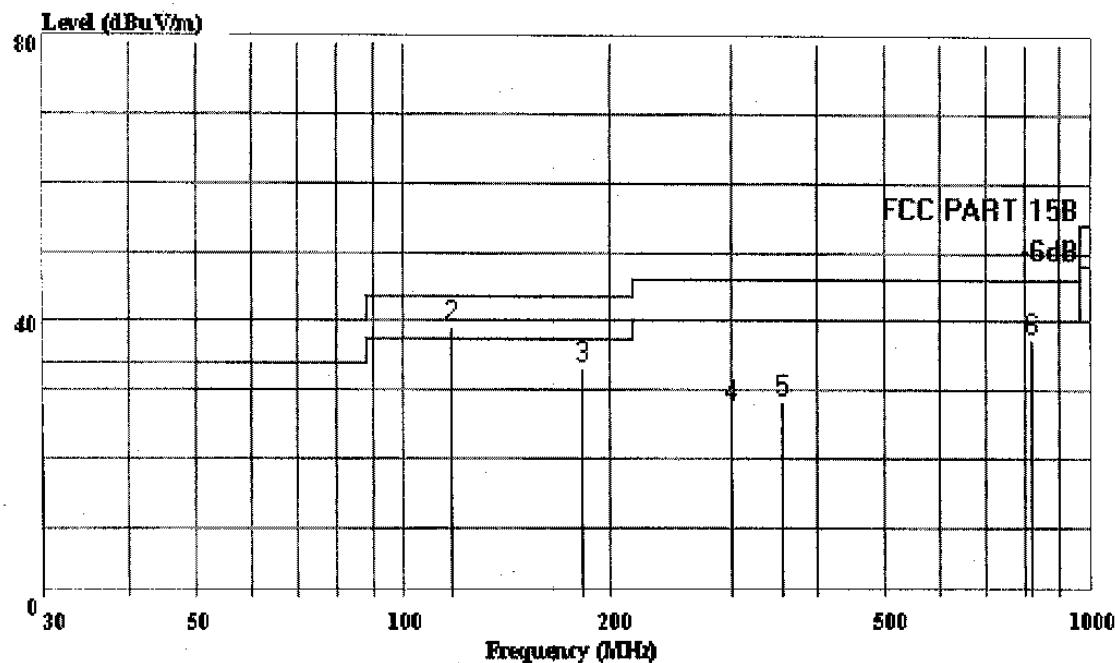

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 25.98FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : FM108MHz
 : AntPos:1.8m TablePos:312'


Page: 1

	Freq	Limit Level	Over Line	Read Limit	Cable Level	Probe Loss	Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	30.000	23.89	40.00	-16.12	6.10	1.05	16.74
2	117.700	39.16	43.50	-4.34	25.96	2.23	10.97
3	182.290	33.39	43.50	-10.11	21.03	2.80	9.56
4	300.630	27.56	46.00	-18.44	10.34	3.86	13.36
5	354.950	28.52	46.00	-17.48	8.69	4.22	15.61
6	819.580	37.29	46.00	-8.71	8.60	6.93	21.76



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 22 File#: Continental.EMI Date: 2004-02-03 Time: 21:16:53

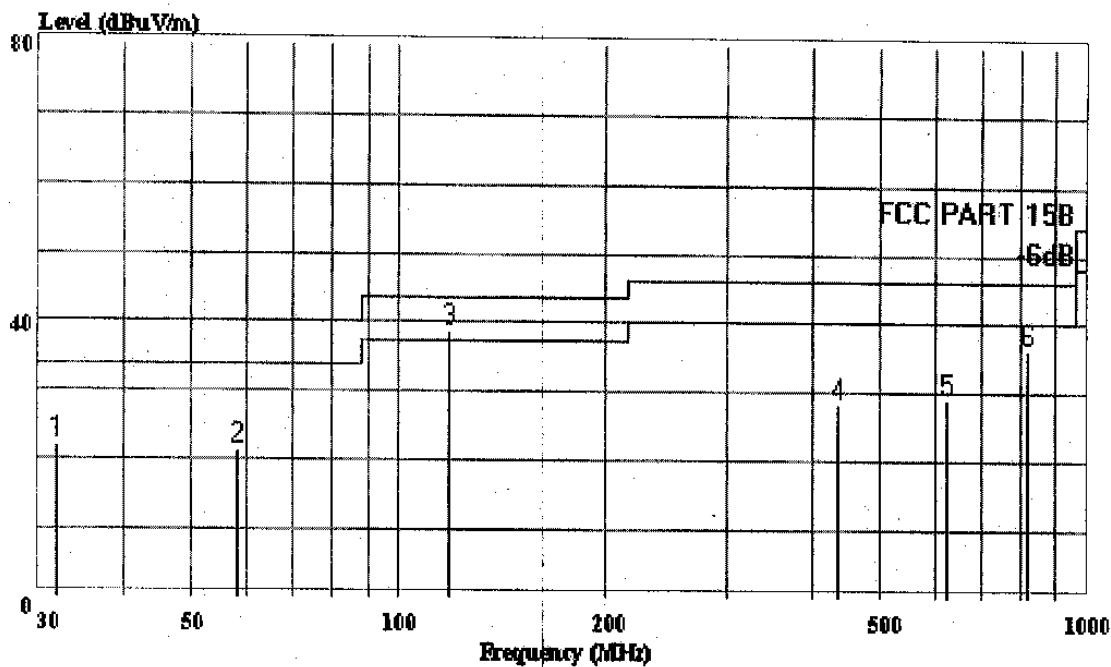

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 25.98FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio & CD
M/N : GM3065
Power : Adaptor AC Input 120V/60Hz Output DC12V
Engineer: Seco
Memo : Temp:24' Humi:54%
: FM108MHz
: AntPos:1.1m TablePos:0

Page: 1


Freq.	Level	Limit	Over	Read	Cable	Probe
		Line	Limit	Level	Loss	Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB
1	31.940	22.12	40.00	-17.88	7.53	1.08 13.50
2	58.130	21.50	40.00	-18.50	14.43	1.48 5.59
3	118.700	38.75	43.50	-4.75	25.34	2.23 11.18
4	435.460	28.50	46.00	-17.50	6.71	4.93 16.86
5	626.550	29.20	46.00	-16.80	3.41	6.17 19.62
6	820.550	36.37	46.00	-9.63	7.26	7.05 22.06



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:10:30

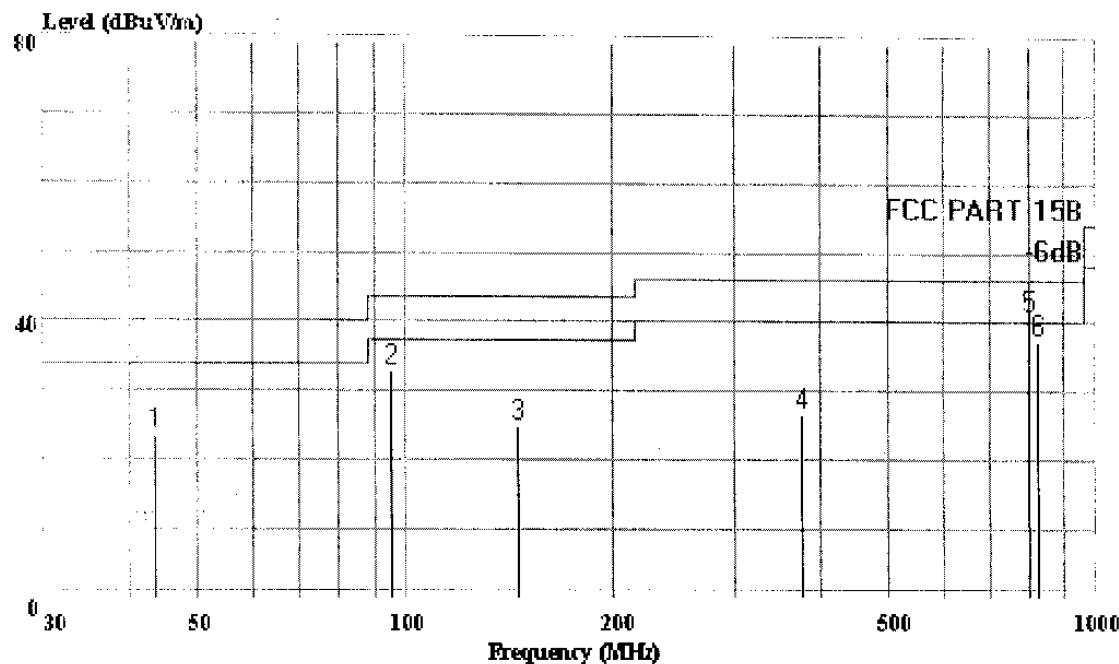

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 Equipment: 2.4G Cordless Phone w/radio & CD
 M/N: GH3065
 Power: Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo: Temp:24' Humi:54%
 : Base CH40
 : AntPos:1.9m TablePos:300'

Page: 1


	Freq	Limit Level	Over Line	Read Limit	Cable Level	Probe Loss	Probe Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	43.280	23.70	40.00	-16.30	10.58	1.24	11.88
2	95.300	33.03	43.50	-10.47	22.49	1.99	8.55
3	145.130	24.80	43.50	-18.70	10.32	2.48	12.00
4	375.440	26.61	46.00	-19.39	6.30	4.36	15.96
5	802.213	40.88	46.00	-5.12	12.21	7.12	21.56
6	822.490	37.45	46.00	-8.55	8.56	7.12	21.76



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:03:30

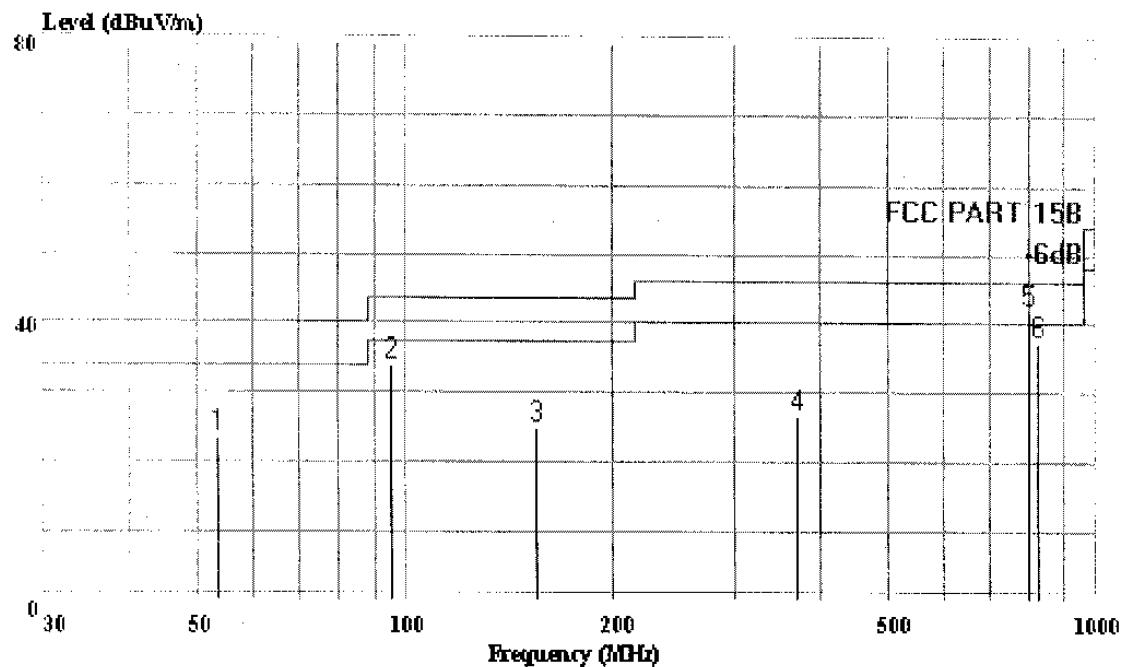

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 RUM: 2.4G Cordless Phone w/radio & CD
 M/N: GH3065
 Power: Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo: 'Temp:24' Humi:54%
 : Base CH40
 : AntPos:1.0m TablePos:0'

Page: 1

	Freq	Limit Level	Over Line	Read Limit	Cable Level	Probe Loss	Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	53.280	23.70	40.00	-16.30	15.35	1.44	6.90
2	95.300	34.03	43.50	-9.47	22.30	2.01	9.72
3	155.130	24.80	43.50	-18.70	11.91	2.62	10.27
4	371.440	26.61	46.00	-19.39	7.23	4.37	15.01
5	802.213	41.88	46.00	-4.12	13.67	7.04	21.17
6	822.490	37.45	46.00	-8.55	8.07	7.12	22.26




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 213 File#: C:\EMI TEST DATA\T\Continental.EMI

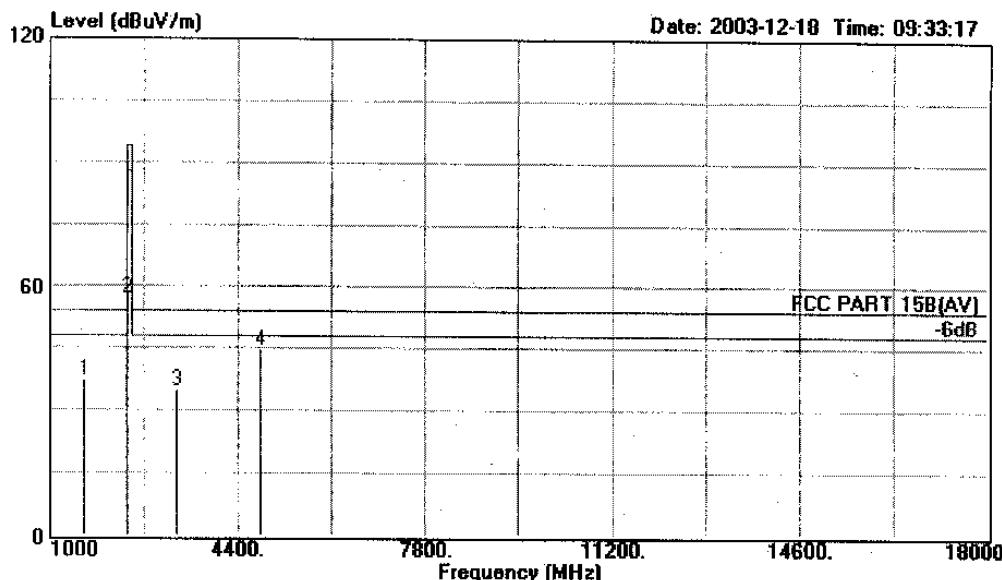

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24' Hum:56%

Freq	Over Limit		Read Line Level	Cable Loss	Probe Factor	Remark
	Level	Limit				
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	1629.000	37.49	-16.51	54.00	9.08	2.68 25.73 Average
2	2400.750	57.55	-36.45	94.00	26.31	3.20 28.04 Average
3	3278.000	35.04	-18.96	54.00	1.19	3.82 30.03 Average
4	4801.200	44.89	-9.11	54.00	7.25	4.63 33.01 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632677

Date#: 212 File#: C:\EMI TEST DATA\T\Continental.EMI

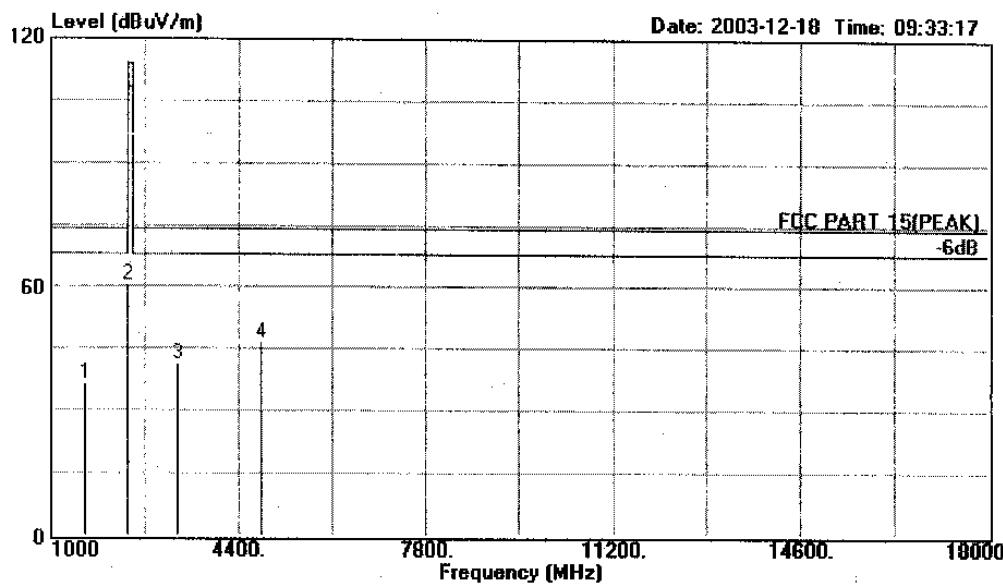

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24° Hum:56%

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	
1	1629.000	36.51	-37.49	74.00	8.10	2.68	25.73 Peak
2	2400.750	60.55	-53.45	114.00	29.31	3.20	28.04 Peak
3	3278.000	41.67	-32.33	74.00	7.82	3.82	30.03 Peak
4	4801.200	46.89	-27.11	74.00	9.25	4.63	33.01 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 210 File#: C:\EMI TEST DATA\T\Continental.EMI

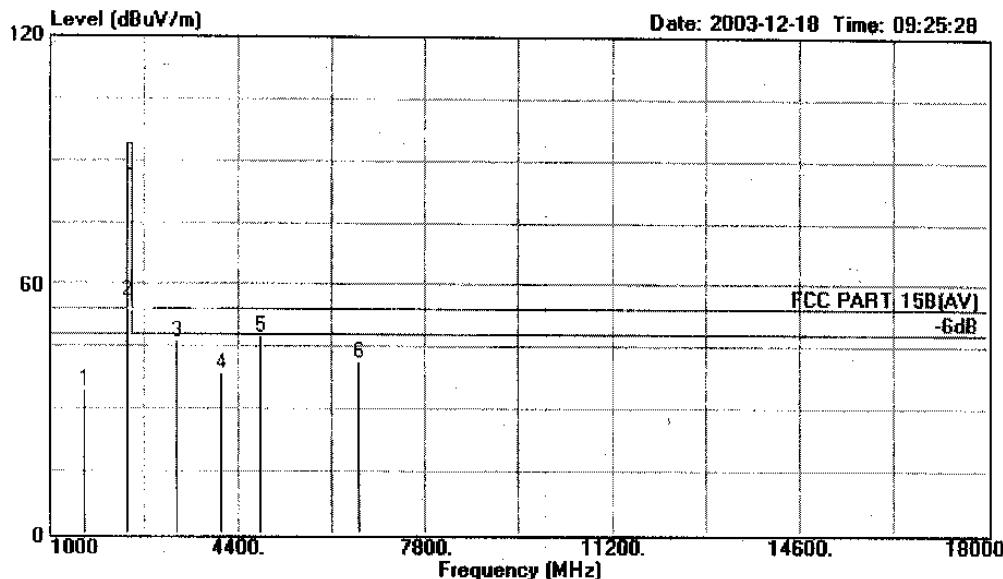

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24° Hum:56%

Freq	Level	Over Limit		Read Line	Cable Level	Probe Loss	Remark Factor
		MHz	dBuV/m	dB	dBuV/m	dB	dB
1	1612.000	34.73	-19.27	54.00	6.41	2.66	25.66 Average
2	2400.750	56.13	-37.87	94.00	24.89	3.20	28.04 Average
3	3295.000	46.18	-7.82	54.00	12.27	3.83	30.08 Average
4	4094.000	38.72	-15.28	54.00	2.16	4.26	32.30 Average
5	4801.200	47.65	-6.35	54.00	10.01	4.63	33.01 Average
6	6576.000	41.50	-12.50	54.00	2.00	5.59	33.91 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 209 File#: C:\EMI TEST DATA\T\Continental.EMI

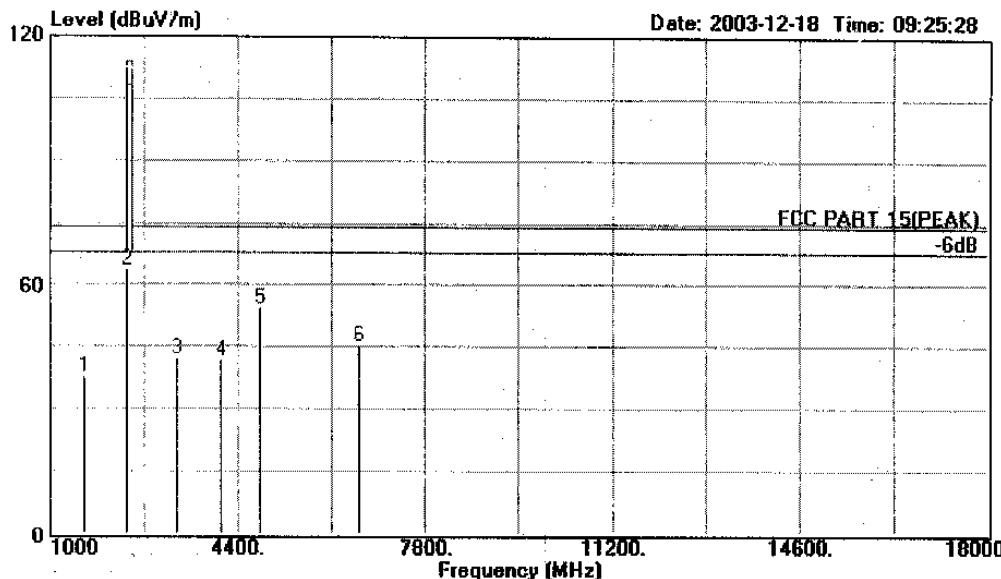

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line	Cable Probe		
			Level	Limit	Level

	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1612.000	37.73	-36.27	74.00	9.41	2.66	25.66	Peak
2	2400.750	63.87	-50.13	114.00	32.63	3.20	28.04	Peak
3	3295.000	42.43	-31.57	74.00	8.52	3.83	30.08	Peak
4	4094.000	41.72	-32.28	74.00	5.16	4.26	32.30	Peak
5	4801.200	54.65	-19.35	74.00	17.01	4.63	33.01	Peak
6	6576.000	45.50	-28.50	74.00	6.00	5.59	33.91	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 216 File#: C:\EMI TEST DATA\T\Continental.EMI

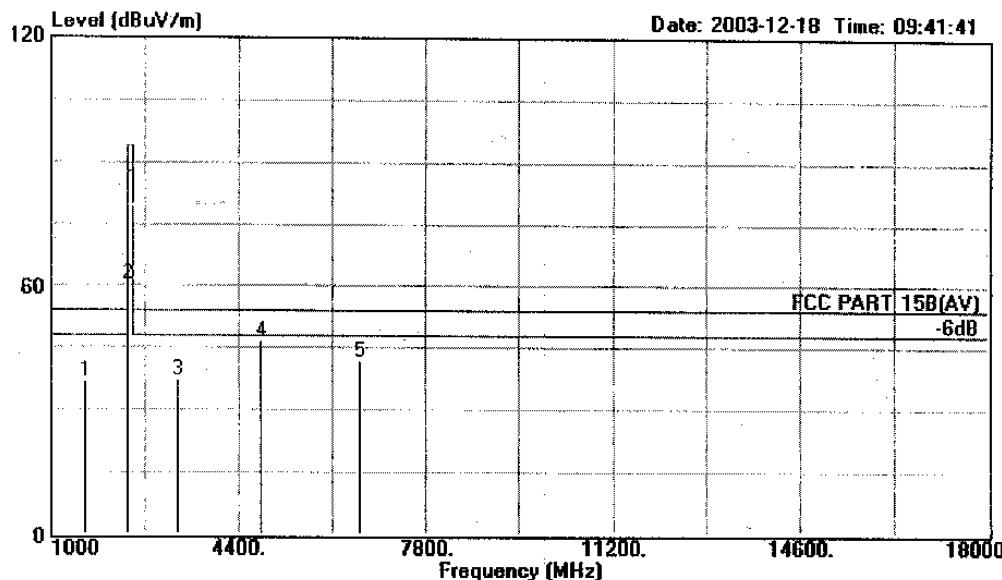

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Limit	Read	Cable	Probe
			Line	Level	Loss Factor

	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1612.000	36.91	-17.09	54.00	8.59	2.66	25.66	Average
2	2403.600	60.75	-33.25	94.00	29.47	3.21	28.07	Average
3	3295.000	37.60	-16.40	54.00	3.69	3.83	30.08	Average
4	4807.700	46.63	-7.37	54.00	8.99	4.63	33.01	Average
5	6576.000	42.06	-11.94	54.00	2.56	5.59	33.91	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Date#: 215 File#: C:\EMI TEST DATA\T\Continental.EMI

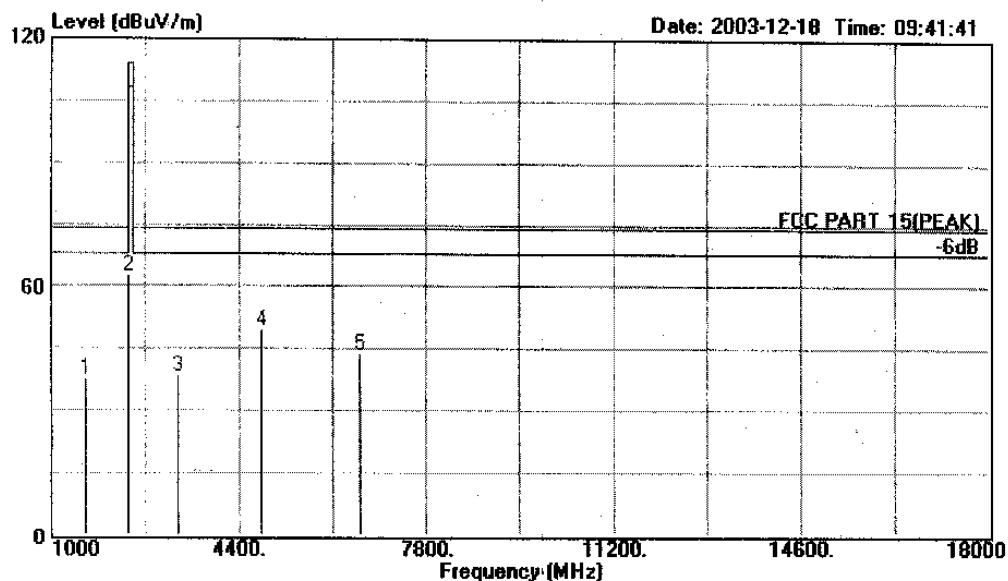

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line	Cable Probe		
			Level	Limit	Level

	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1612.000	37.91	-36.09	74.00	9.59	2.66	25.66	Peak
2	2403.600	62.75	-51.25	114.00	31.47	3.21	28.07	Peak
3	3295.000	38.60	-35.40	74.00	4.69	3.83	30.08	Peak
4	4807.700	49.63	-24.37	74.00	11.99	4.63	33.01	Peak
5	6576.000	44.06	-29.94	74.00	4.56	5.59	33.91	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 219 File#: C:\EMI TEST DATA\T\Continental.EMI

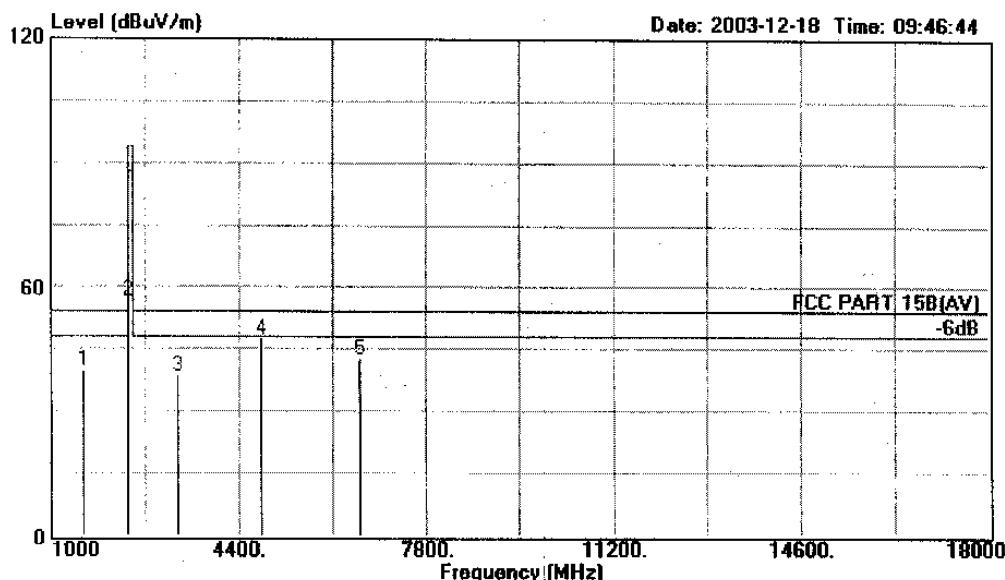

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Read			Probe
		Line	Cable	Probe	
Level	Limit	Level	Loss	Factor	Remark

	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1578.000	39.86	-14.14	54.00	11.70	2.64	25.52	Average
2	2403.600	56.80	-37.20	94.00	25.52	3.21	28.07	Average
3	3295.000	38.79	-15.21	54.00	4.88	3.83	30.08	Average
4	4807.700	47.72	-6.28	54.00	10.08	4.63	33.01	Average
5	6576.000	42.85	-11.15	54.00	3.35	5.59	33.91	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 218 File#: C:\EMI TEST DATA\T\Continental.EMI

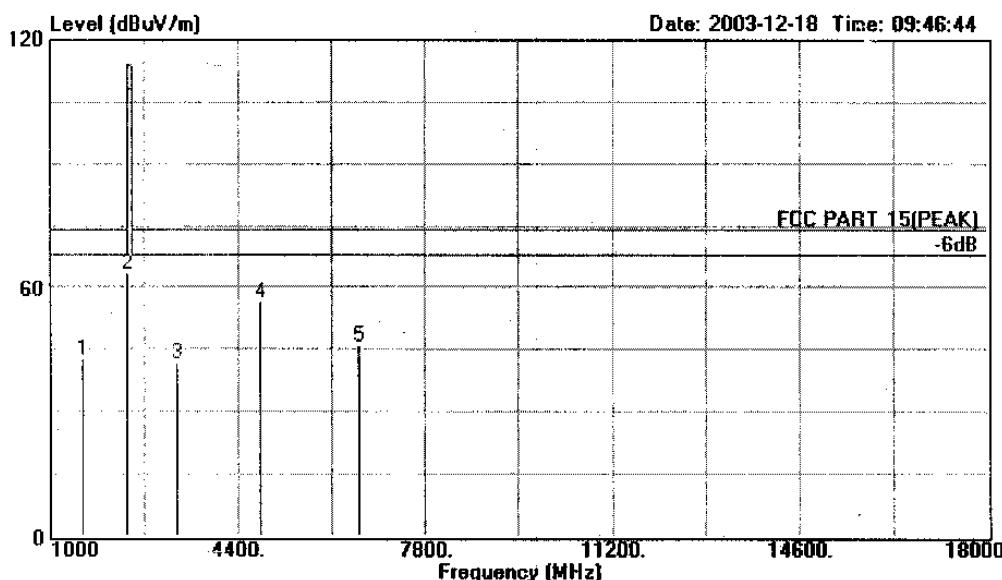

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%

Freq	Level	Over Limit		Read Line	Cable Level	Probe Loss	Factor	Remark
		MHz	dB	dBuV/m	dB	dB	dB	
1	1578.000	42.86	-31.14	74.00	14.70	2.64	25.52	Peak
2	2403.600	63.35	-50.65	114.00	32.07	3.21	28.07	Peak
3	3295.000	41.79	-32.21	74.00	7.00	3.83	30.08	Peak
4	4807.700	56.72	-17.28	74.00	19.06	4.63	33.01	Peak
5	6576.000	45.85	-28.15	74.00	6.35	5.59	33.91	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632677

Data#: 225 File#: C:\EMI TEST DATA\T\Continental.EMI

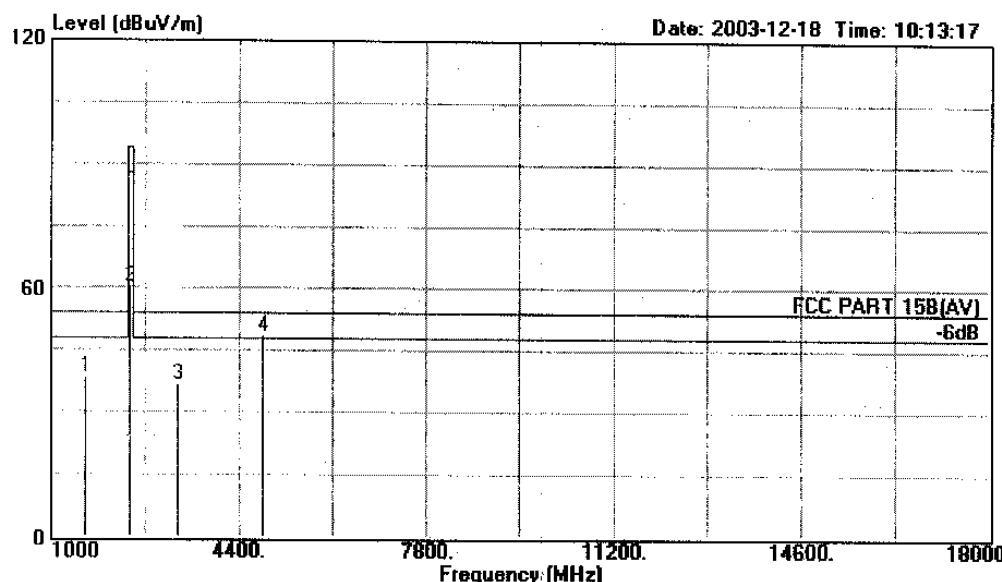

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH40
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Read	Cable	Probe
	Level	Line	Level	Loss Factor

	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1629.000	38.49	-15.51	54.00	10.08	2.68	25.73	Average
2	2406.600	60.55	-33.45	94.00	29.27	3.21	28.07	Average
3	3278.000	37.04	-16.96	54.00	3.19	3.82	30.03	Average
4	4812.200	48.89	-5.11	54.00	11.25	4.63	33.01	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 224 File#: C:\EMI TEST DATA\T\Continental.EMI

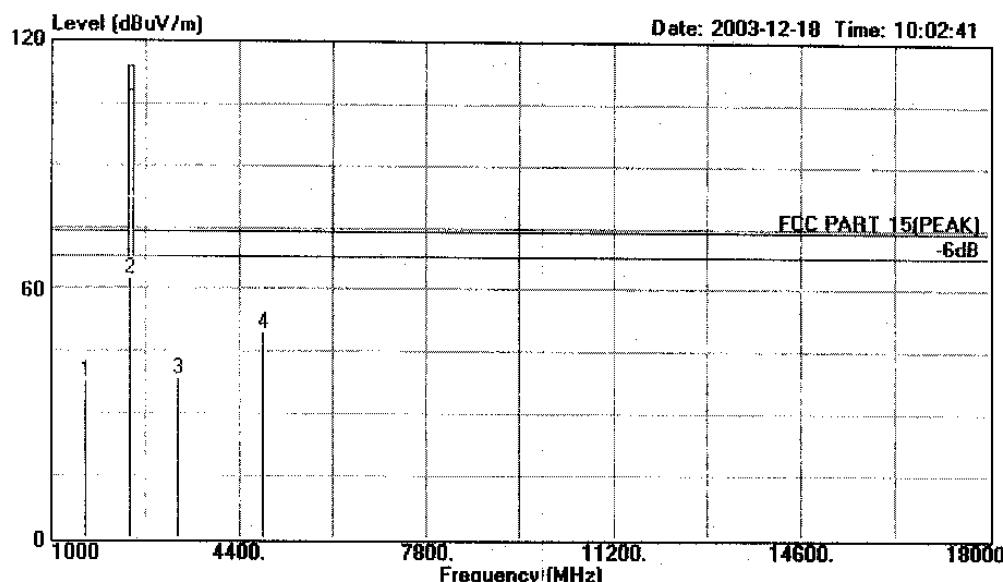

Site : 1# Chamber

Condition : FCC PART 15(PeAK) 3m 3115FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio & CD

M/N : GH3065

Power : Adaptor AC Input 120V/60Hz Output DC12V

Test Engineer : Seco

Memo : Base CH40

Memo : Temp:24° Hum:56%

Freq	Level	Over Limit		Read Line	Cable Level	Probe Loss	Factor	Remark
		Limit	Limit					
1	1612.000	37.91	-36.09	74.00	9.59	2.66	25.66	Peak
2	2406.600	62.75	-51.25	114.00	31.47	3.21	28.07	Peak
3	3295.000	38.60	-35.40	74.00	4.69	3.83	30.08	Peak
4	4812.900	49.63	-24.37	74.00	11.99	4.63	33.01	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 222 File#: C:\EMI TEST DATA\T\Continental.EMI

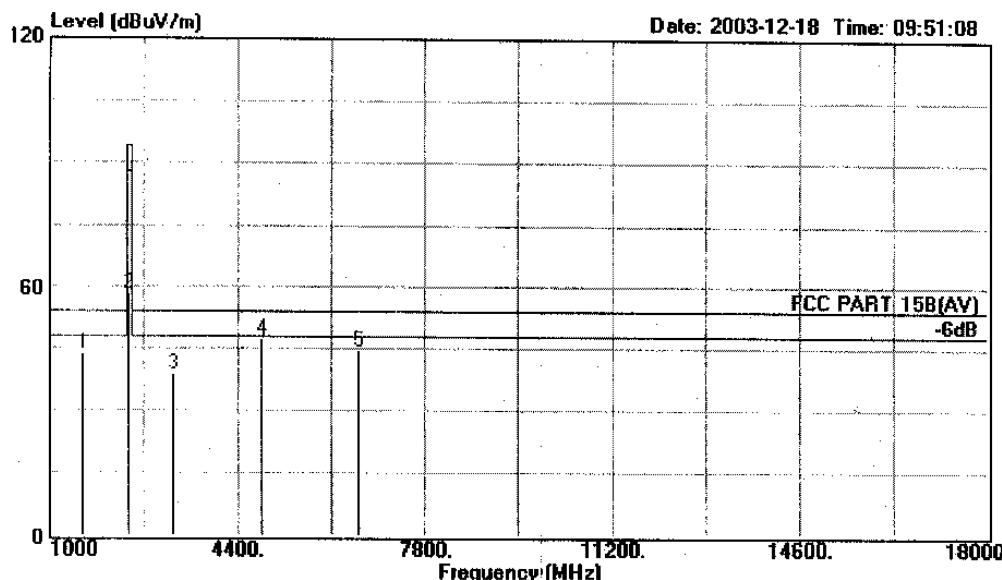

Site : 1# Chamber

Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio & CD

M/N : GH3065

Power : Adaptor AC Input 120V/60Hz Output DC12V

Test Engineer : Seco

Memo : Base CH40

Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line	Cable Loss	Probe Factor	Remark	
					Level	m

	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1578.000	43.86	-10.14	54.00	15.70	2.64	25.52	Average
2	2406.600	58.43	-35.57	94.00	27.15	3.21	28.07	Average
3	3210.000	39.01	-14.99	54.00	5.41	3.78	29.82	Average
4	4813.900	47.69	-6.31	54.00	10.05	4.63	33.01	Average
5	6576.000	44.81	-9.19	54.00	5.31	5.59	33.91	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 221 File#: C:\EMI TEST DATA\T\Continental.EMI

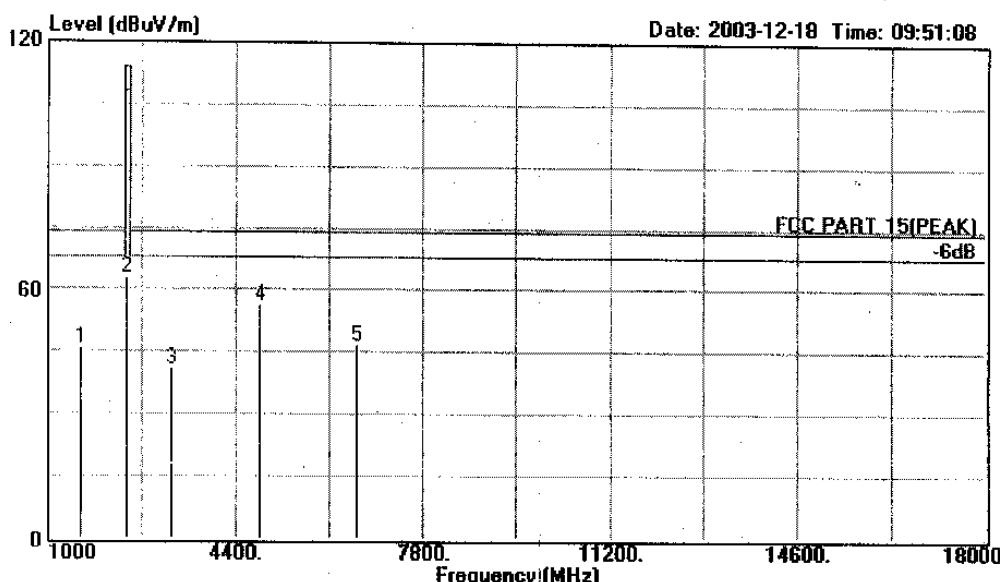

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH40
 Memo : Temp:24° Hum:56%


Freq	Over Limit	Read Line	Cable		Probe
			Level	Limit	

	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1	1578.000	45.86	-26.14	74.00	17.70	2.64	25.52 Peak
2	2406.600	62.93	-51.07	114.00	31.65	3.21	28.07 Peak
3	3210.000	41.01	-32.99	74.00	7.41	3.78	29.82 Peak
4	4813.900	56.69	-17.31	74.00	19.05	4.63	33.01 Peak
5	6576.000	46.81	-27.19	74.00	7.31	5.59	33.91 Peak



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 6 File#: Continental.EMI Date: 2004-02-03 Time: 20:47:44

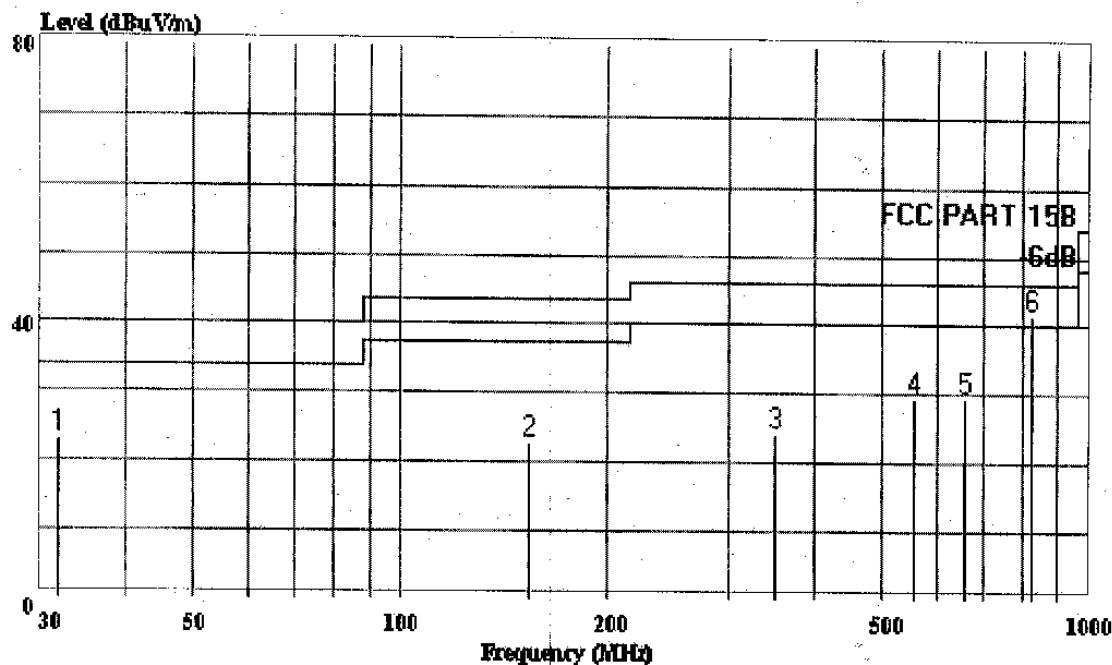

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
FUT : 2.4G Cordless Phone w/radio & CD
M/N : GH3065
Power : DC 3.6V
Engineer:: Seco
Memo : Temp:24' Humi:54%
: Handset CH40
: AntPos:1.6m TablePos:316'

Page: 1


	Freq	Limit Level	Over Line	Read Limit	Cable Level	Probe Loss	Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	31.940	23.35	40.00	-16.65	6.68	1.07	15.60
2	153.190	22.91	43.50	-20.59	8.94	2.57	11.40
3	350.100	24.41	46.00	-21.59	4.62	4.19	15.60
4	558.650	29.50	46.00	-16.50	4.01	6.15	19.34
5	658.560	29.45	46.00	-16.55	3.23	6.36	19.86
6	826.213	41.65	46.00	-4.35	12.60	7.35	21.70



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: 8 File#: Continental.EMI Date: 2004-02-03 Time: 20:51:21

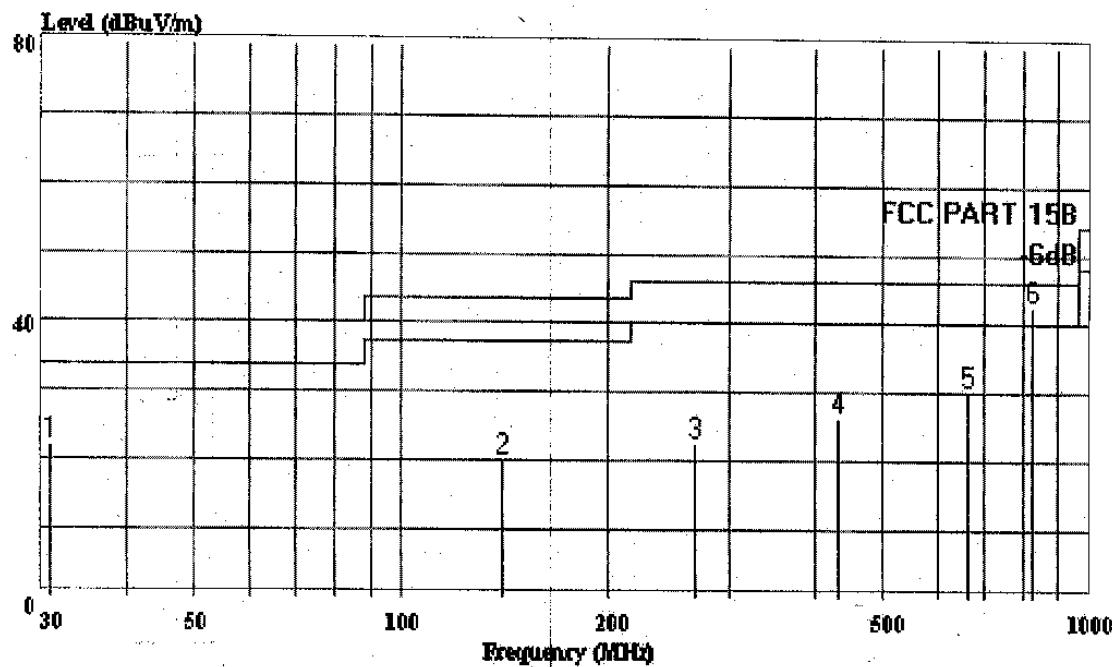

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Handset CH40
 : AntPos:1.1m TablePos:0'

Page: 1

Freq	Level	Limit	Over	Read Level	Cable	Probe	
		Line	Limit		dBuV	dB	
MHz	dBuV/m	dBuV/m	dB				
1	30.970	22.14	40.00	-17.86	5.67	1.05	15.42
2	140.580	20.11	43.50	-23.39	5.75	2.41	11.95
3	268.620	22.58	46.00	-23.42	5.50	3.46	13.62
4	432.550	26.32	46.00	-19.68	4.62	4.89	16.81
5	665.350	30.04	46.00	-15.96	3.39	6.40	20.26
6	826.213	42.48	46.00	-3.52	12.62	7.35	22.51




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 192 File#: C:\EMI TEST DATA\T\Continental.EMI

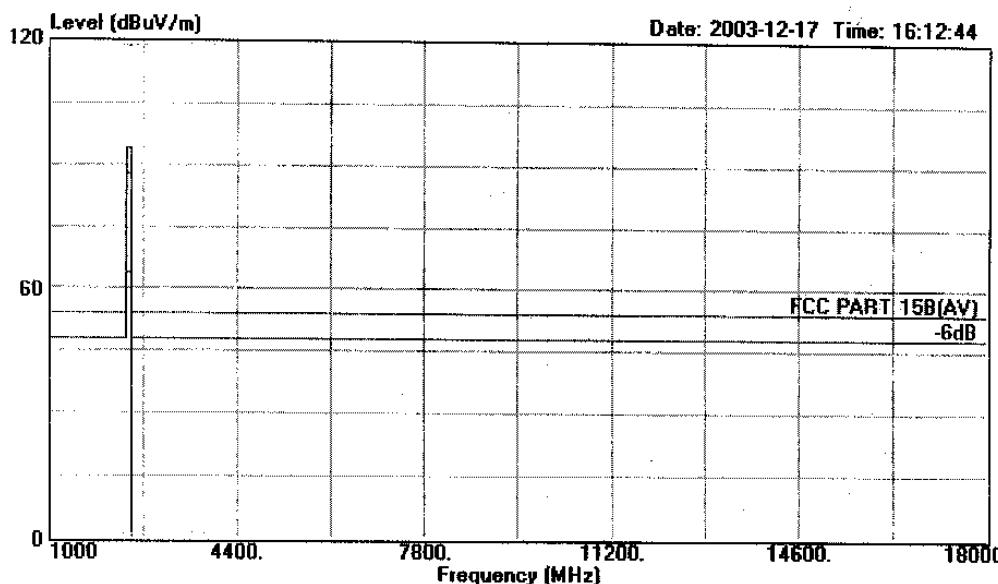

Site : 1# Chamber

Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio & CD

M/N : GH3065

Power : DC 3.6V

Test Engineer : Seco

Memo : Handset CH1

Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line	Cable Level	Probe Loss Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB

1	2472.750	59.80	-34.20	94.00	26.34	3.26	26.20	Average
---	----------	-------	--------	-------	-------	------	-------	---------




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 191 File#: C:\EMI TEST DATA\T\Continental.EMI

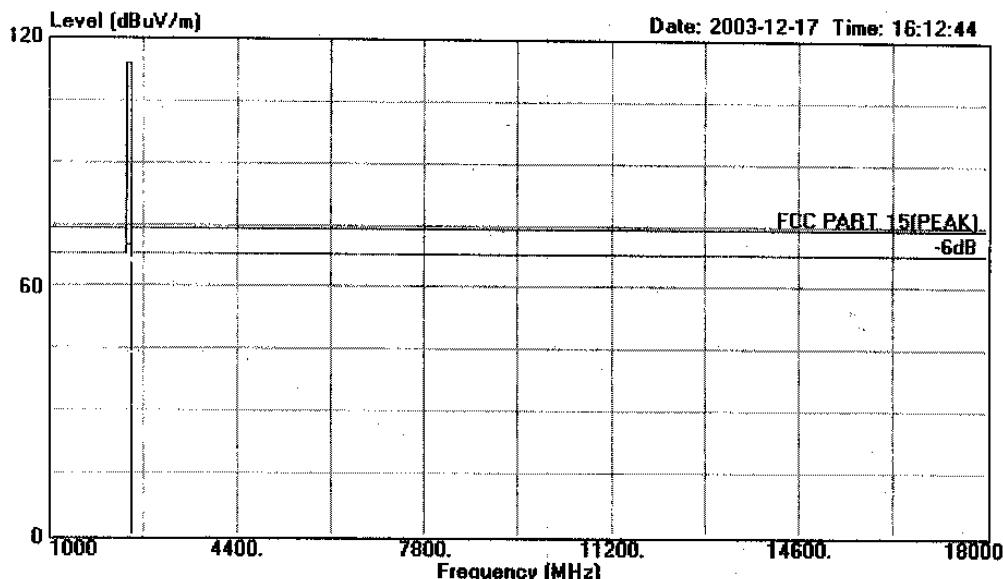

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24' Hum:56%

	Over Limit	Read Line	Cable Level	Probe Loss	Factor	Remark	
Freq	Level	Limit	Line	dBuV	dB		
MHz	dB _{UV/m}	dB	dB _{UV/m}	dBuV	dB	dB	
1	2472.750	65.80	-48.20	114.00	34.34	3.26	28.20 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 195 File#: C:\EMI TEST DATA\T\Continental.EMI

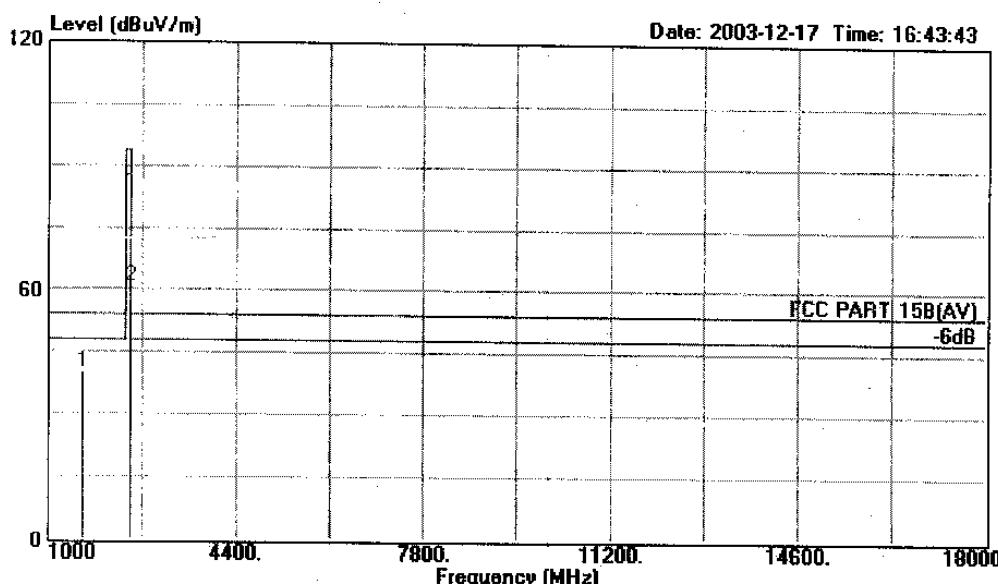

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24' Hum:56%

Freq	Level	Over Limit		Read Line	Cable Level	Probe Loss	Factor	Remark
		MHz	dBuV/m					

1	1629.800	40.41	-13.59	54.00	12.00	2.66	25.73	Average
2	2472.750	61.20	-32.80	94.00	29.74	3.26	28.20	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 194 File#: C:\EMI TEST DATA\T\Continental.EMI

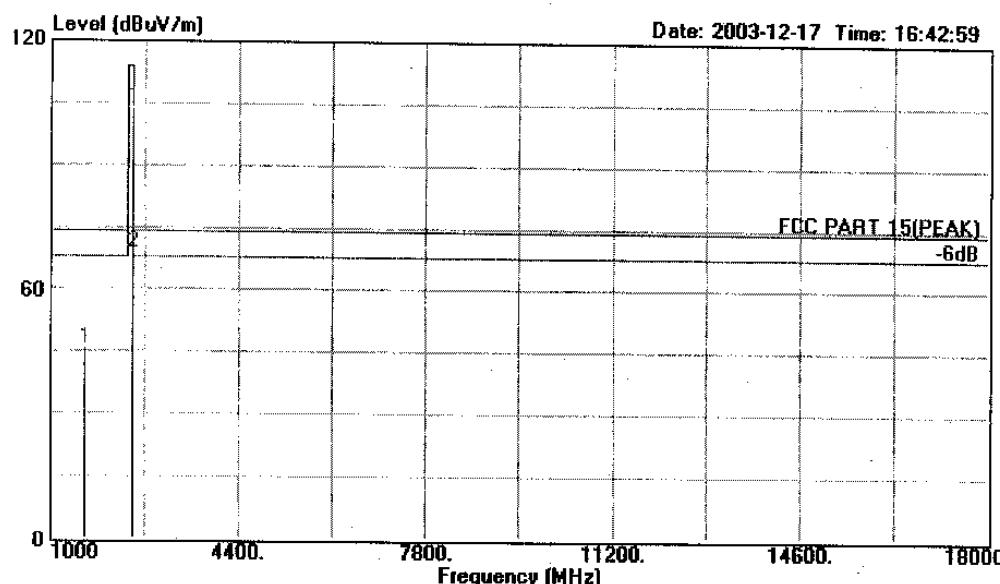

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line	Cable Level	Probe Loss	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	

1	1629.800	46.10	-27.90	74.00	17.69	2.68	25.73	Peak
2	2475.750	69.00	-45.00	114.00	37.54	3.26	28.20	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 201 File#: C:\EMI TEST DATA\T\Continental.EMI

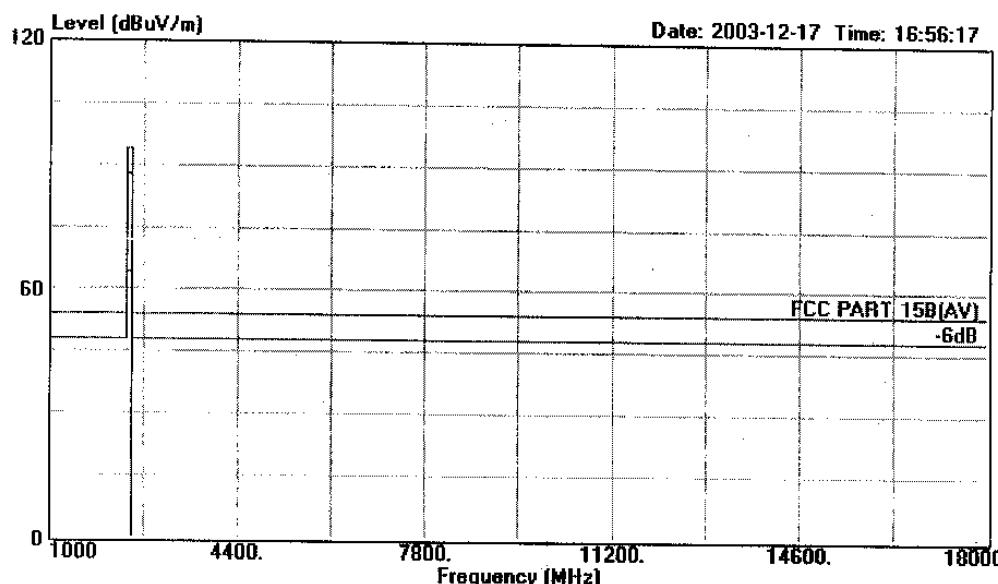

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH20
 Memo : Temp:24' Hum:56%

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		MHz	dB _{UV} /m	dB	dB _{UV} /m	dBuV	
1	2475.600	60.10	-33.90	94.00	28.64	3.26	28.20 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 200 File#: C:\EMI TEST DATA\T\Continental.EMI

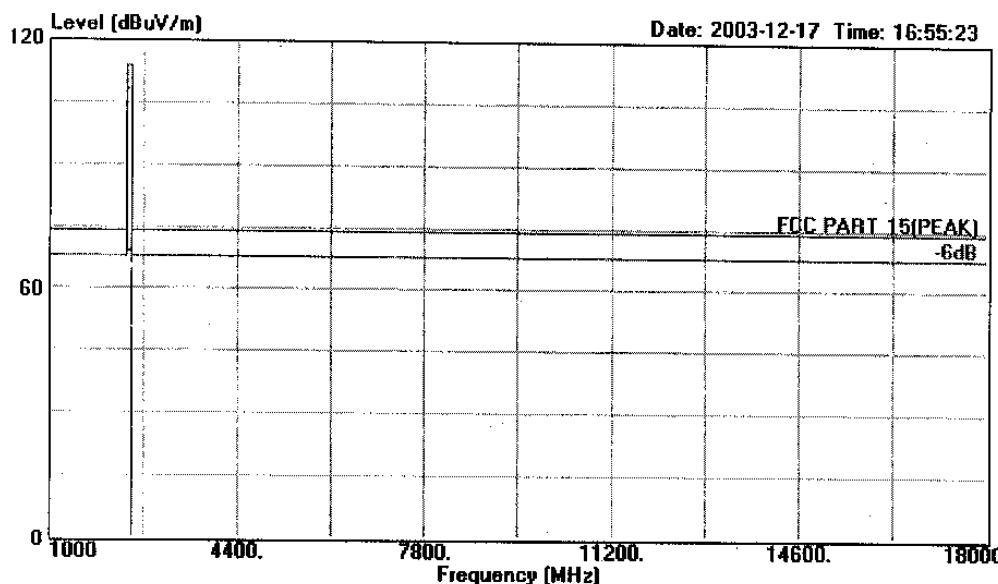

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH20
 Memo : Temp:24' Hum:56%

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		MHz	dB _{UV/m}	dB	dB _{UV/m}	dBuV	
1	2475.600	64.90	-49.10	114.00	33.44	3.26	28.20 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 198 File#: C:\EMI TEST DATA\T\Continental.EMI

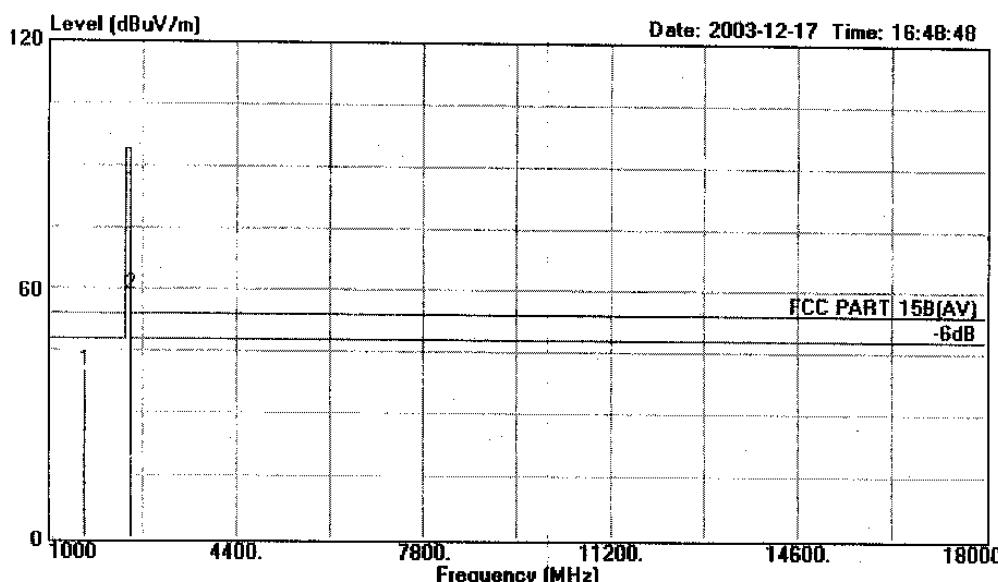

Site : 1# Chamber

Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio & CD

M/N : GH3065

Power : DC 3.6V

Test Engineer : Seco

Memo : Handset CH20

Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line	Cable Level	Probe Loss	Factor	Remark
------	------------	-----------	-------------	------------	--------	--------

	MHz	dB _{uV/m}	dB	dB _{uV/m}	dBuV	dB	dB
1	1650.400	40.10	-13.90	54.00	11.60	2.69	25.81 Average
2	2475.600	59.10	-34.90	94.00	27.64	3.26	28.20 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 197 File#: C:\EMI TEST DATA\T\Continental.EMI

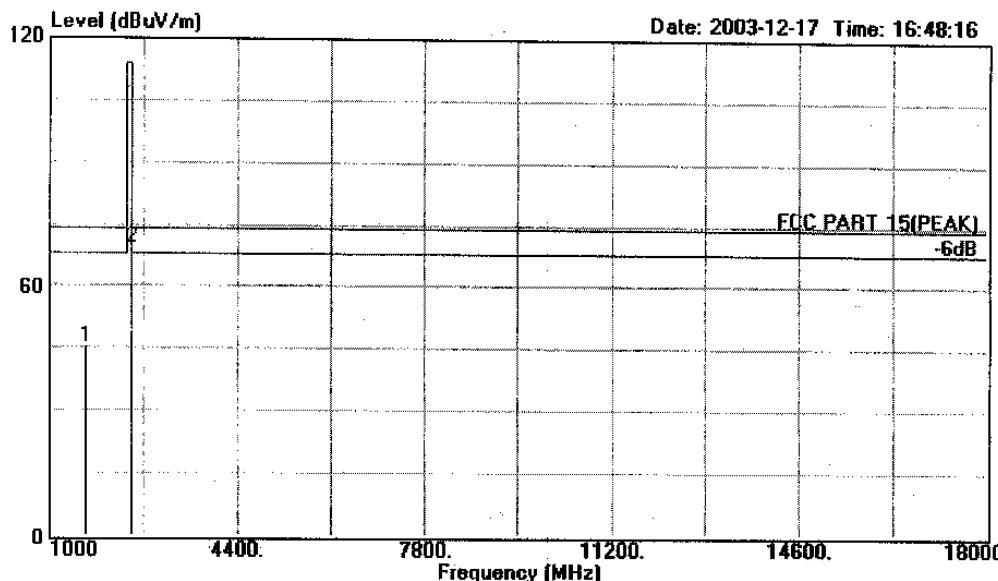

Site : 1# Chamber

Condition : FCC PART 15(PeAK) 3m 3115FACTOR VERTICAL

EUT : 2.4G Cordless Phone w/radio & CD

M/N : GH3065

Power : DC 3.6V

Test Engineer : Seco

Memo : Handset CH20

Memo : Temp:24' Hum:56%

Freq	Level	Over Limit	Read Line	Cable Probe			
				dB	dBuV	dB	
1	1650.400	45.60	-28.40	74.00	17.10	2.69	25.81 Peak
2	2475.600	69.55	-44.45	114.00	38.09	3.26	28.20 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 204 File#: C:\EMI TEST DATA\T\Continental.EMI

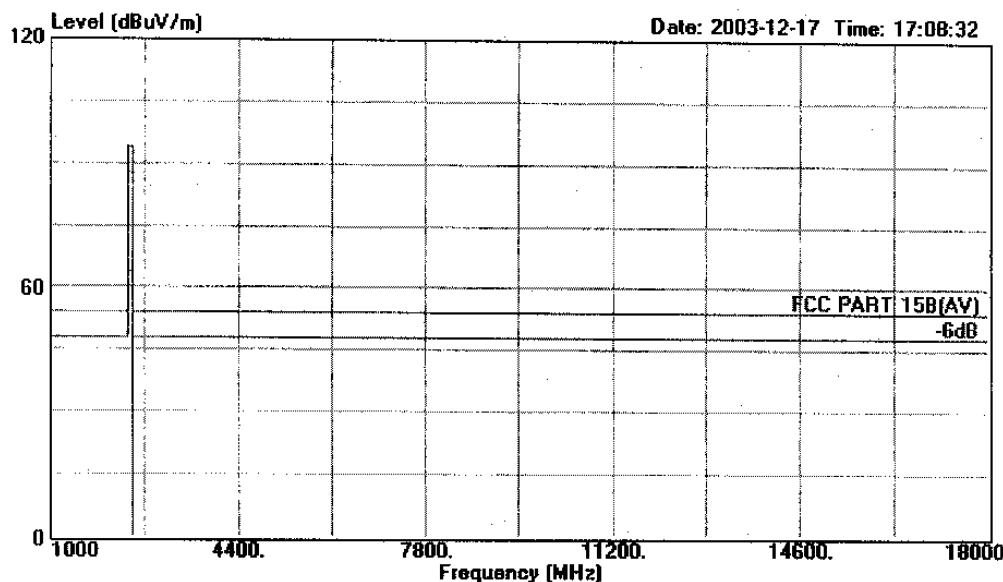

Site : 1# Chamber

Condition : FCC PART 15B(AV) 3m 3115FACTOR HORIZONTAL

EUT : 2.4G Cordless Phone w/radio & CD

M/N : GH3065

Power : DC 3.6V

Test Engineer : Seco

Memo : Handset CH40

Memo : Temp:24' Hum:56%

Freq	Level	Over	Limit	Read	Cable	Probe
		Line	Level	Loss	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	

1	2476.600	59.60	-34.40	94.00	26.14	3.26	26.20	Average
---	----------	-------	--------	-------	-------	------	-------	---------




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 203 File#: C:\EMI TEST DATA\T\Continental.EMI

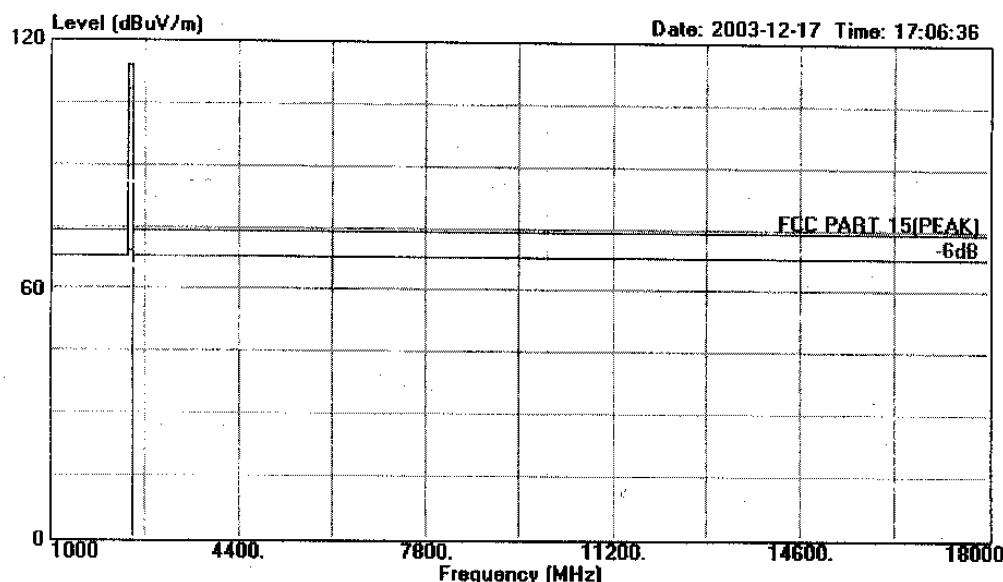

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/ radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24' Hum:56%

Freq	Over Limit	Read Line Level	Cable Probe			
			Level	dBuV/m	dB	dB
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 2476.600	65.10	-48.90	114.00	33.64	3.26	28.20 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632677

Data#: 207 File#: C:\EMI TEST DATA\T\Continental.EMI

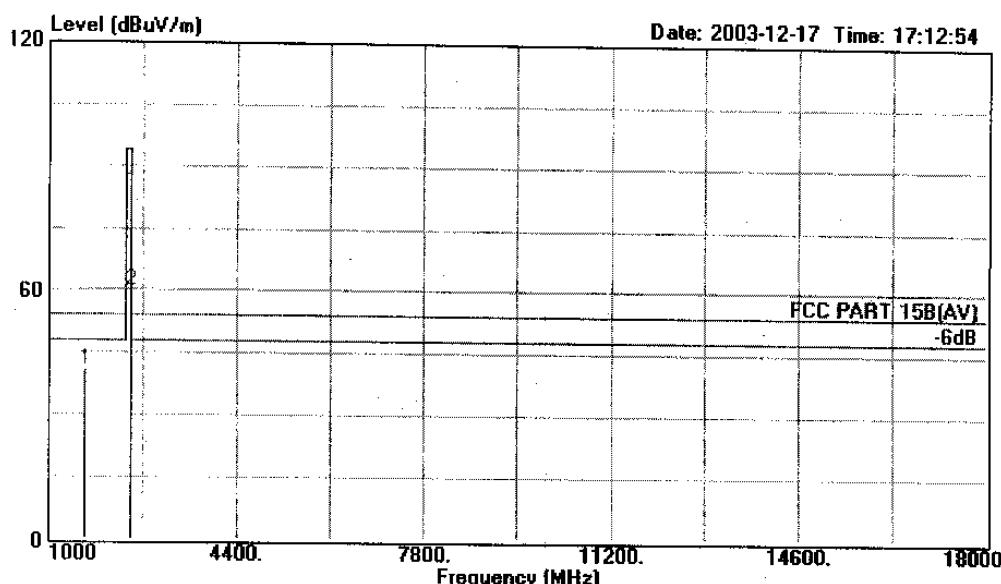

Site : 1# Chamber
 Condition : FCC PART 15B(AV) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 N/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24° Hum:56%

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	
1	1652.400	41.20	-12.80	54.00	12.70	2.69	25.81 Average
2	2478.600	60.30	-33.70	94.00	28.84	3.26	28.20 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632677

Data#: 206 File#: C:\EMI TEST DATA\T\Continental.EMI

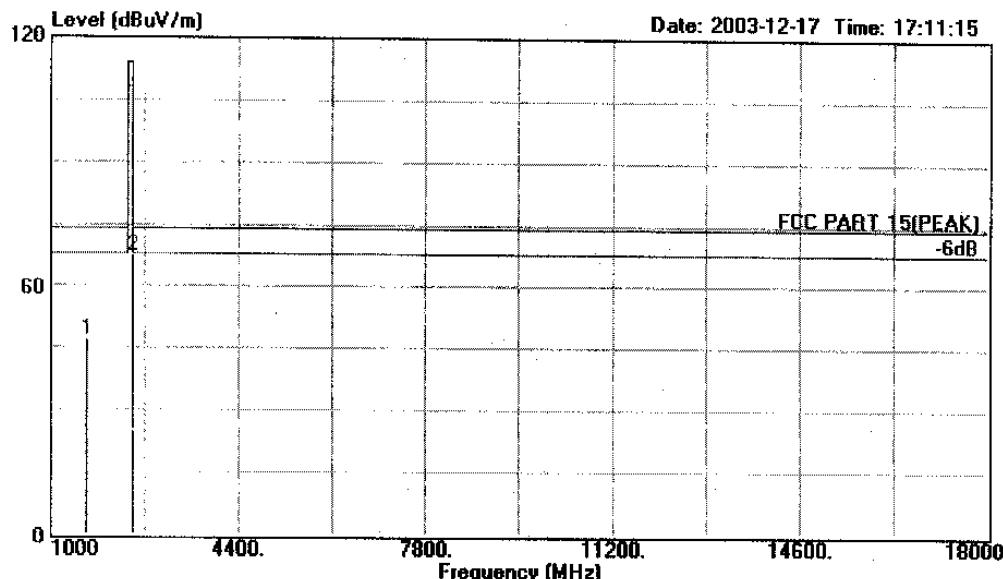

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/ radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24' Hum:56%


Freq	Level	Over Limit		Read Line	Cable Level	Probe Loss	Factor	Remark
		MHz	dBuV/m	dB	dBuV/m	dB	dB	
1	1652.400	47.20	-26.80	74.00	18.70	2.69	25.81	Peak
2	2478.600	67.66	-46.34	114.00	36.20	3.26	28.20	Peak

APPENDIX I



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 13 File#: Continental.EMI Date: 2004-02-04 Time: 09:21:48

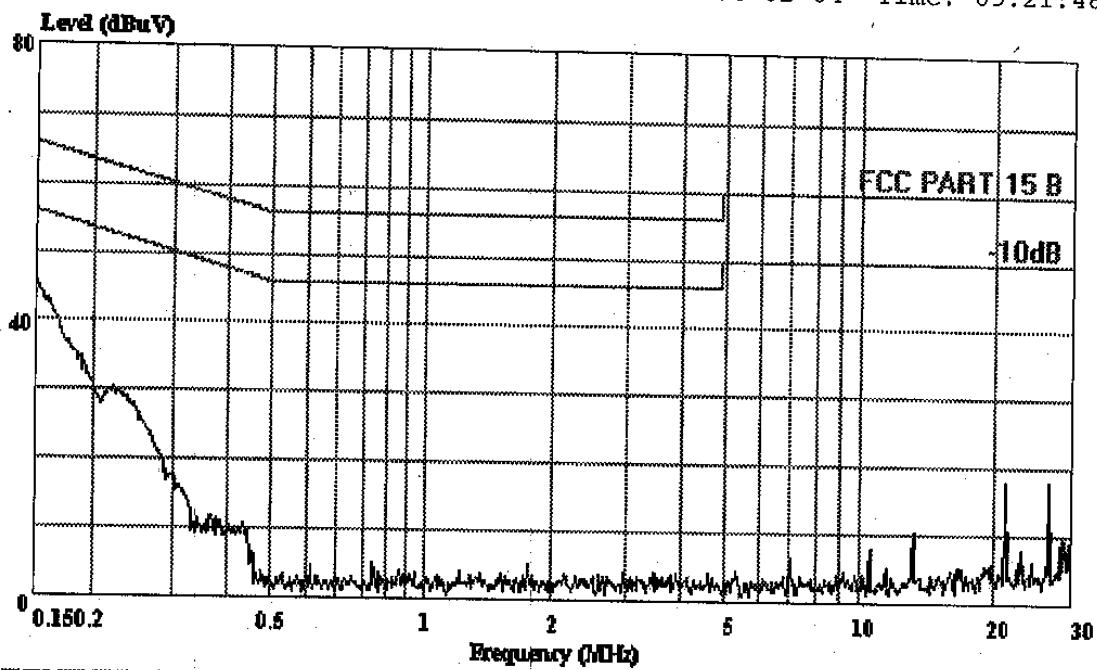

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)

EUT : 2.4G Cordless Phone w/radio & CD

M/N : GH3065

OP Condition : CD Playing

Test Spec : Adaptor AC Input 120V/60Hz Output DC12V

Test Engineer: Seco


Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 15 File#: Continental.EMI Date: 2004-02-04 Time: 09:29:30

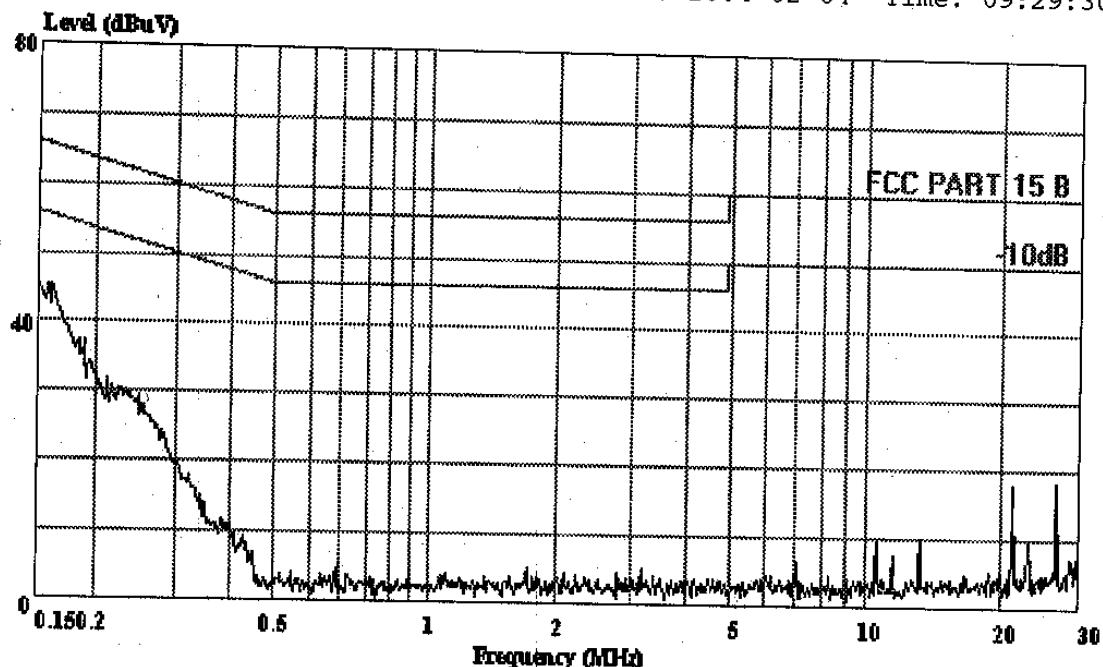

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : CD Playing
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 8 File#: Continental.EMI Date: 2004-02-04 Time: 09:18:13

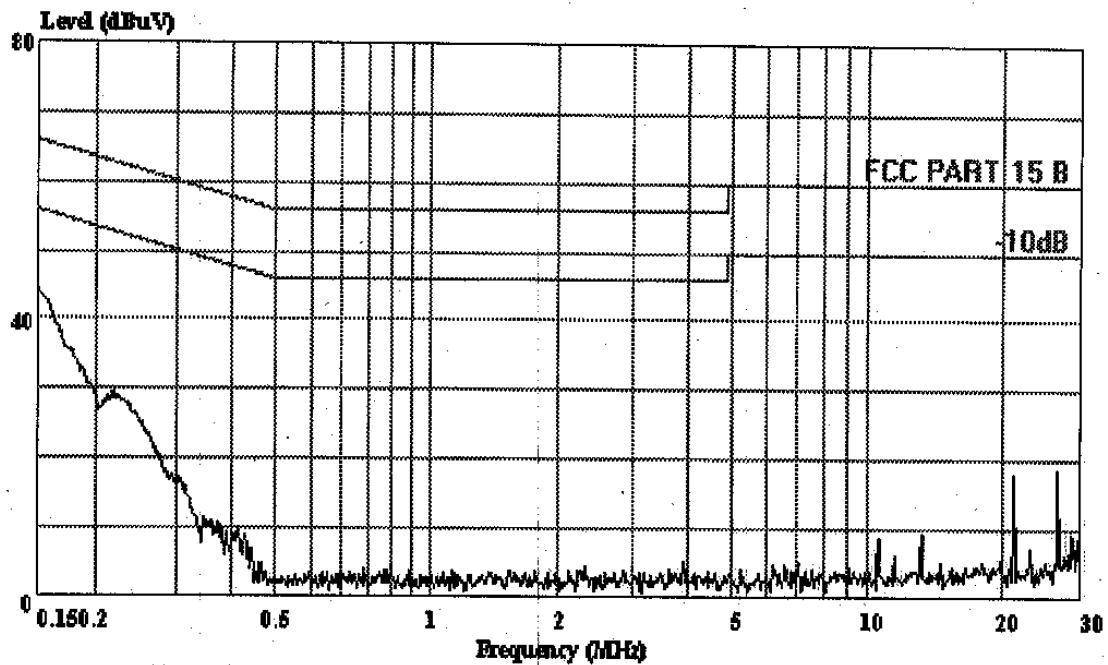

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : FM88MHz
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 7 File#: Continental.EMI Date: 2004-02-04 Time: 09:17:44

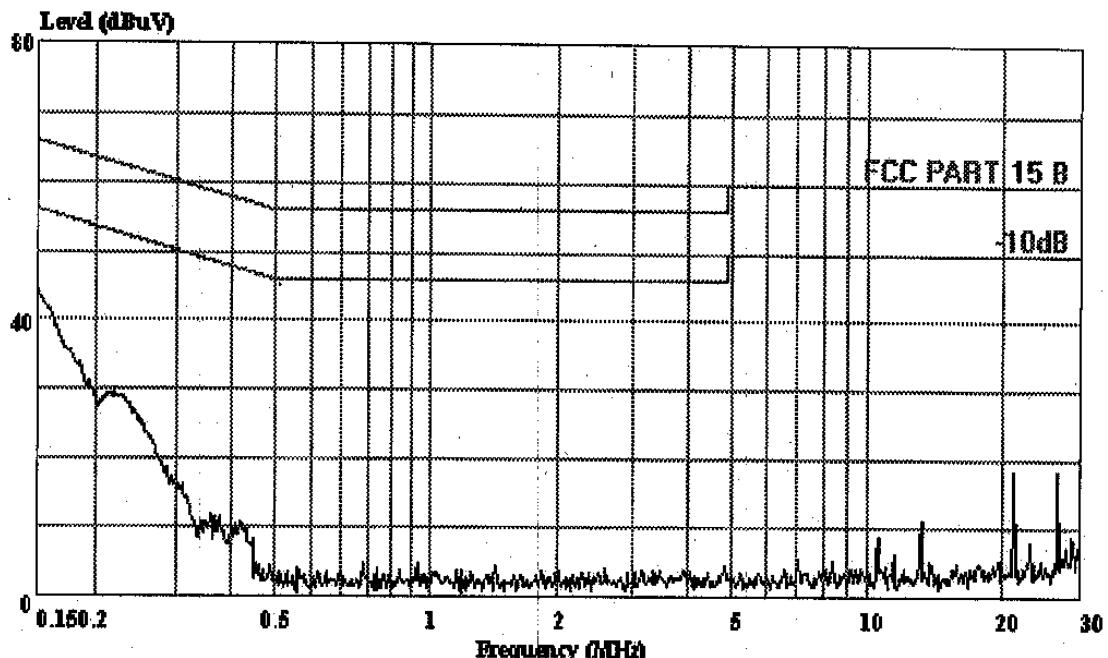

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : FM88MHz
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 9 File#: Continental.EMI Date: 2004-02-04 Time: 09:18:50

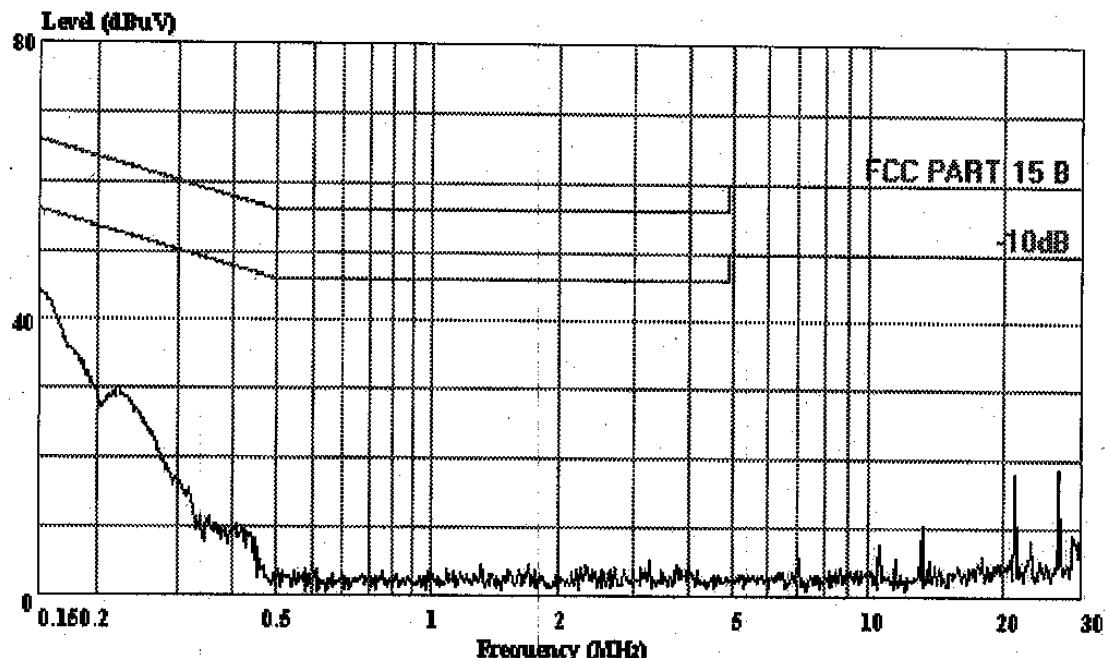

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : FM98MHz
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 10 File#: Continental.EMI Date: 2004-02-04 Time: 09:19:40

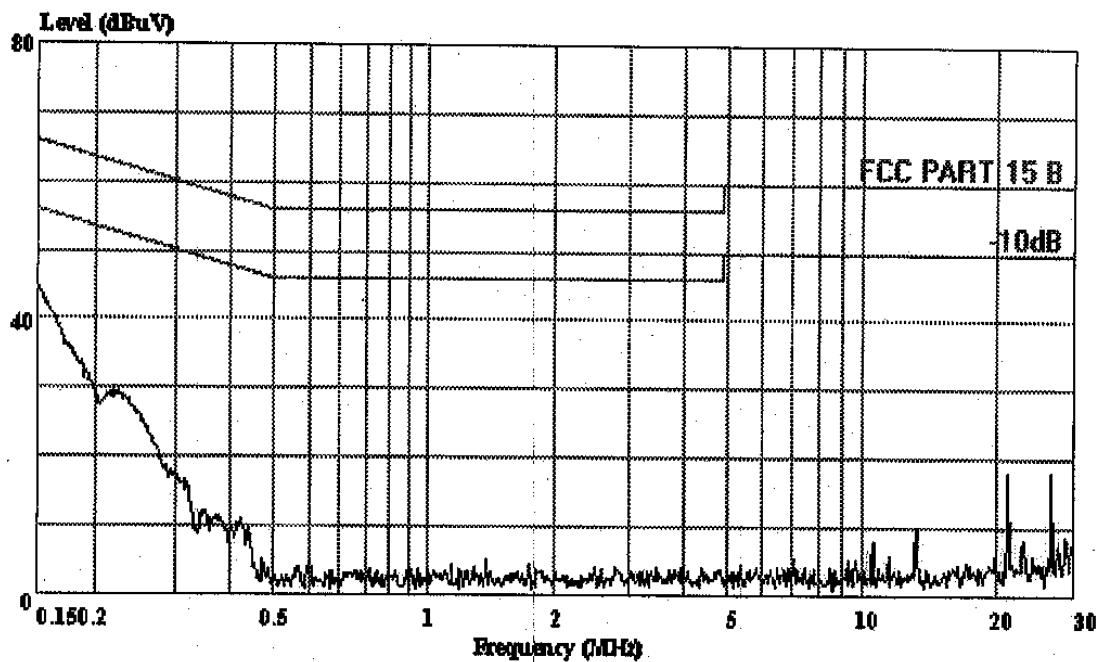


AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)
Trace: Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : FM98MHz
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 12 File#: Continental.EMI Date: 2004-02-04 Time: 09:20:56

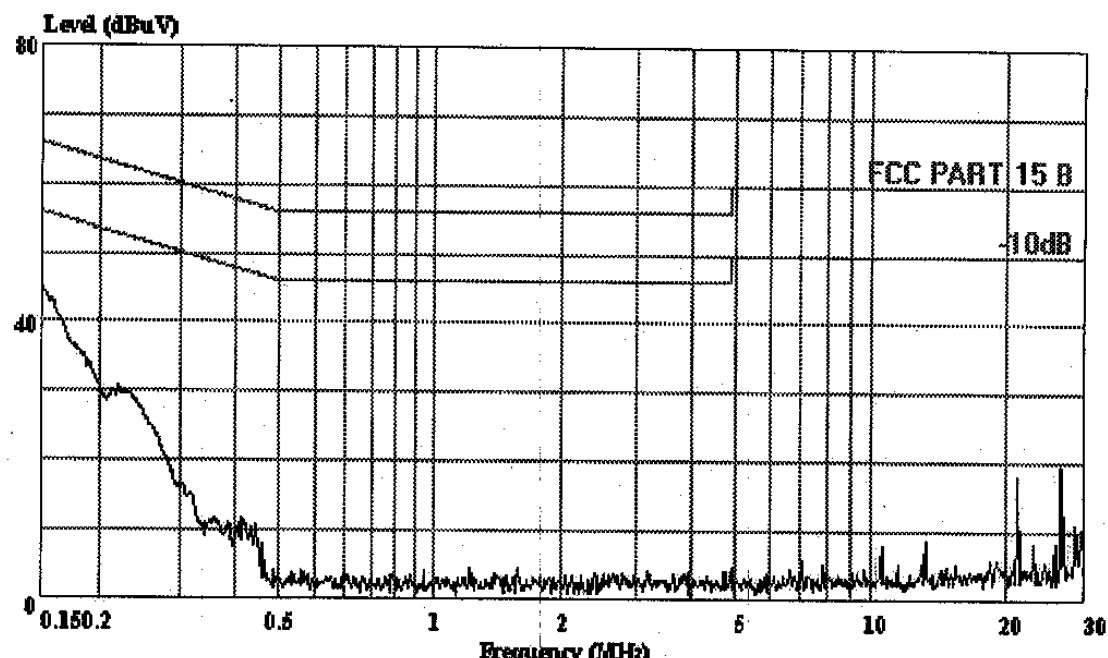


AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : FM108MHz
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%

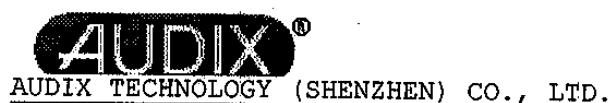

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 11 File#: Continental.EMI Date: 2004-02-04 Time: 09:20:20

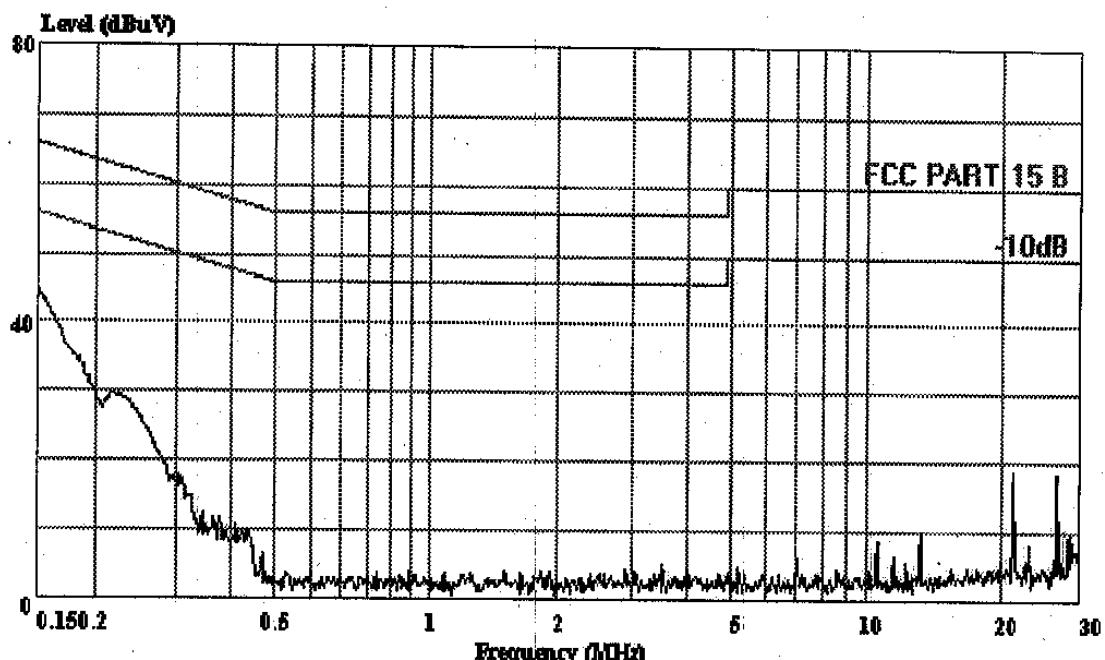

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : FM108MHz
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 1 File#: Continental.EMI Date: 2004-02-04 Time: 09:10:33

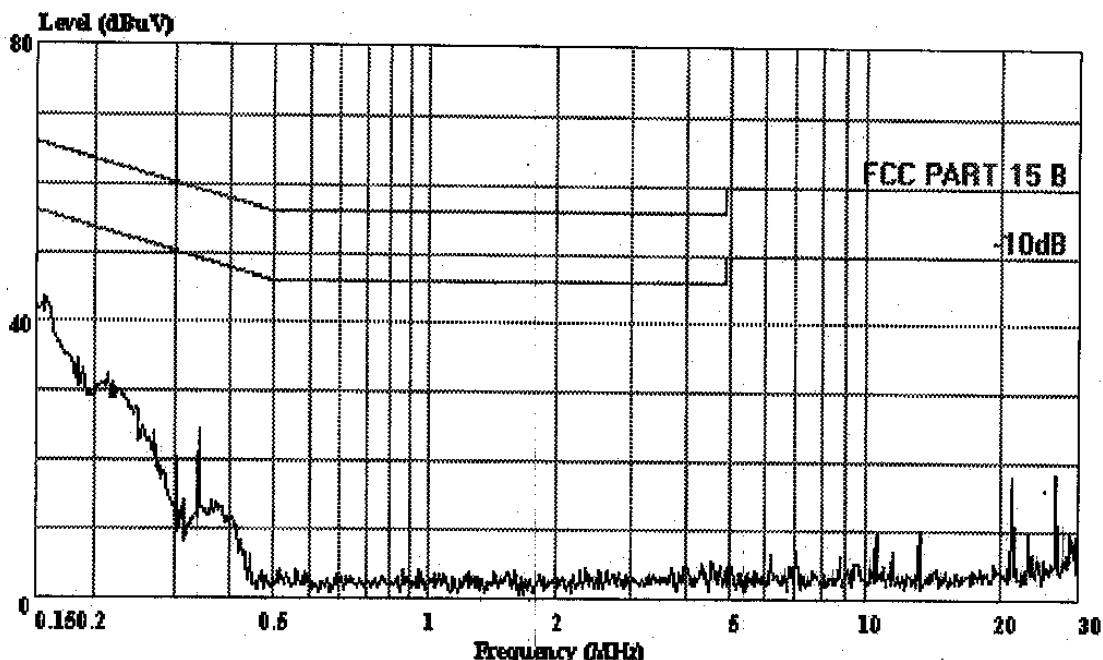

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : Base CH1
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 2 File#: Continental.EMI Date: 2004-02-04 Time: 09:11:10

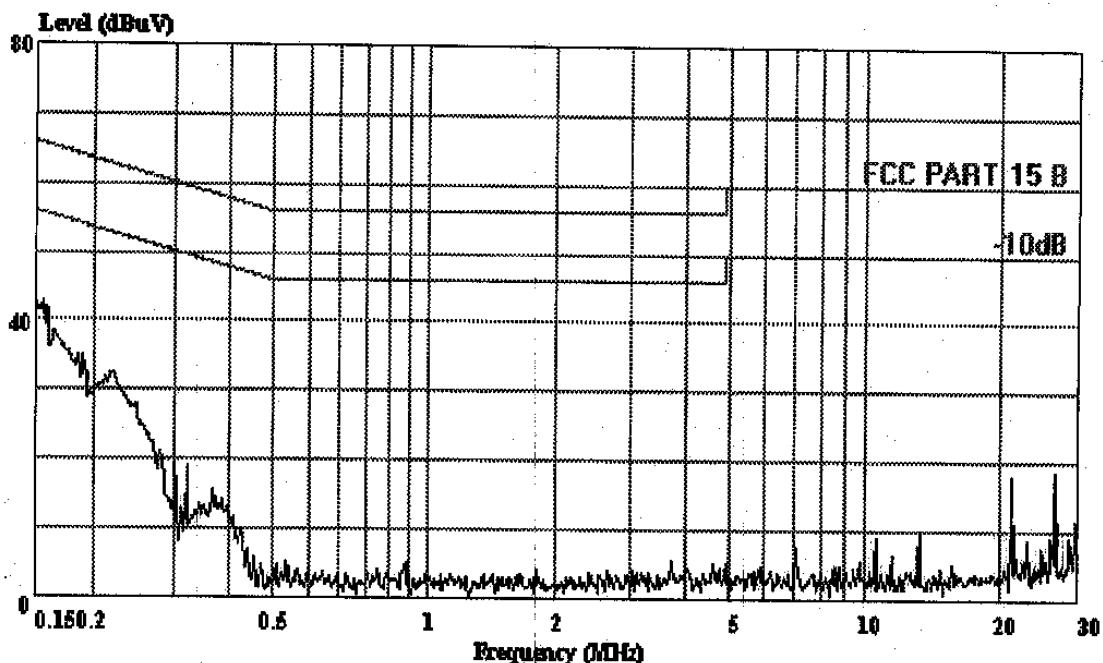

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : Base CH1
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 4 File#: Continental.EMI Date: 2004-02-04 Time: 09:14:48

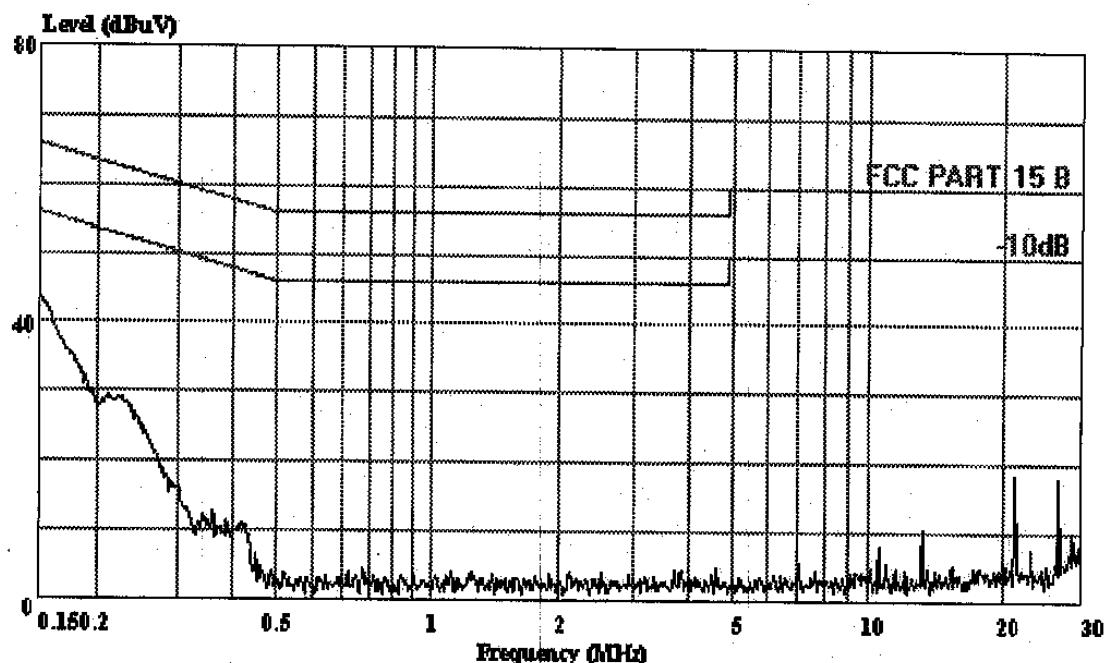

Trace:

Ref Trace:


Condition: FCC PART 15 B VA (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : Base CH20
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 3 File#: Continental.EMI Date: 2004-02-04 Time: 09:14:02

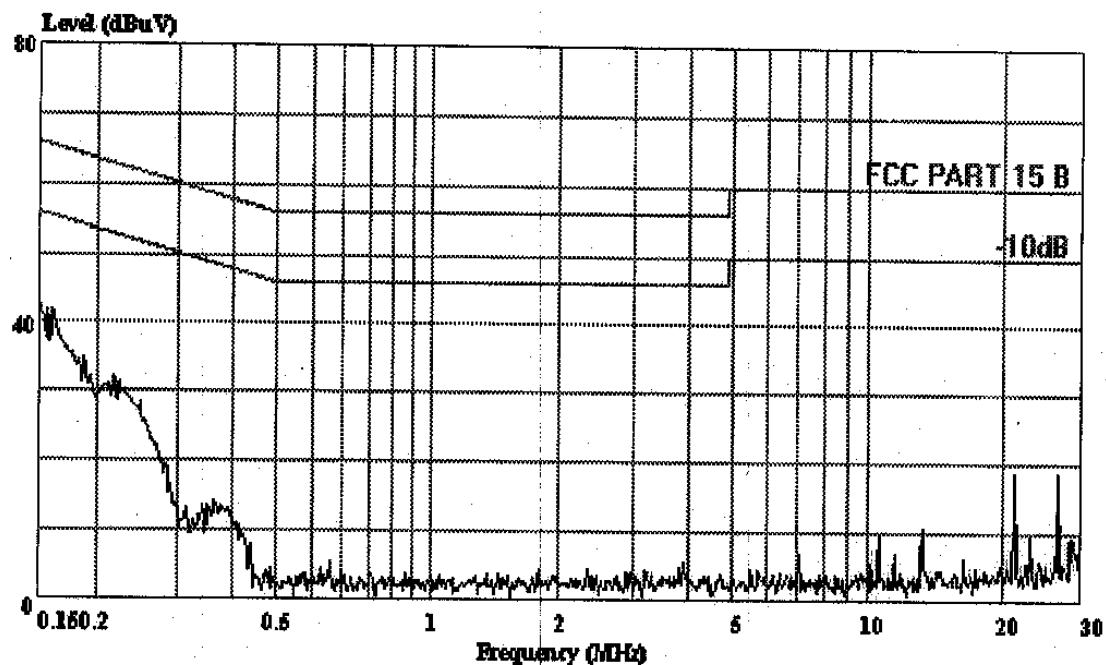

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : Base CH20
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%



Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 5 File#: Continental.EMI Date: 2004-02-04 Time: 09:15:31

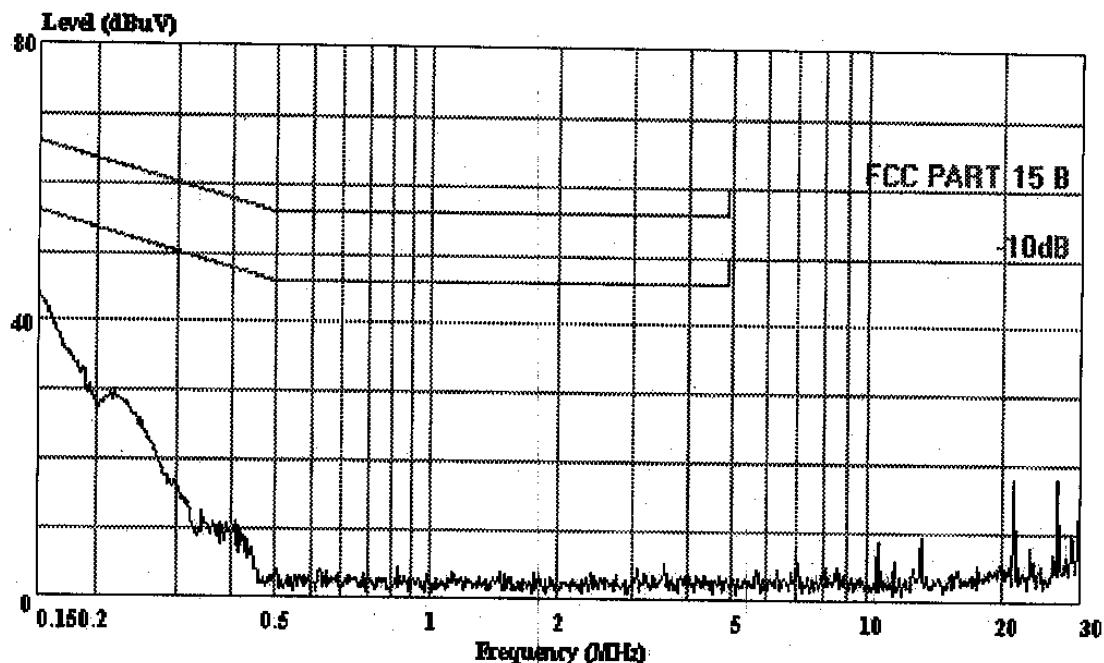

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VA (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD.
 M/N : GH3065
 OP Condition : Base CH40
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23° Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 6 File#: Continental.EMI Date: 2004-02-04 Time: 09:16:09

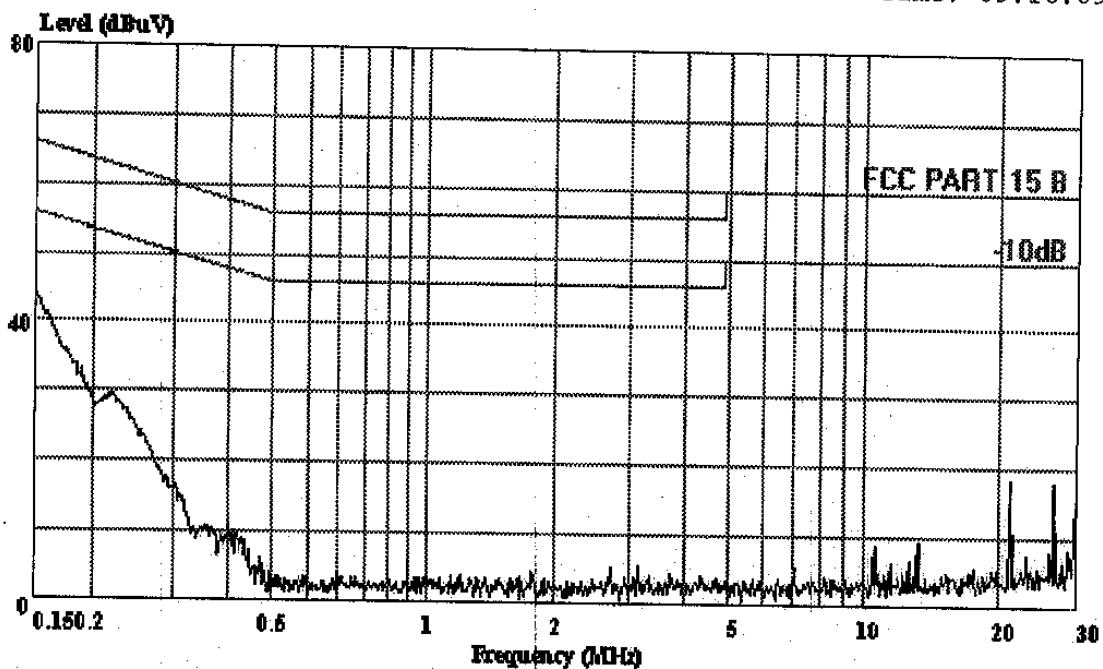

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15 B VB (KNW-407)
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 OP Condition : Base CH40
 Test Spec : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer: Seco
 Comment : Temp:23' Humi:54%

APPENDIX II



Shenzhen Science & Tech. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:22:42

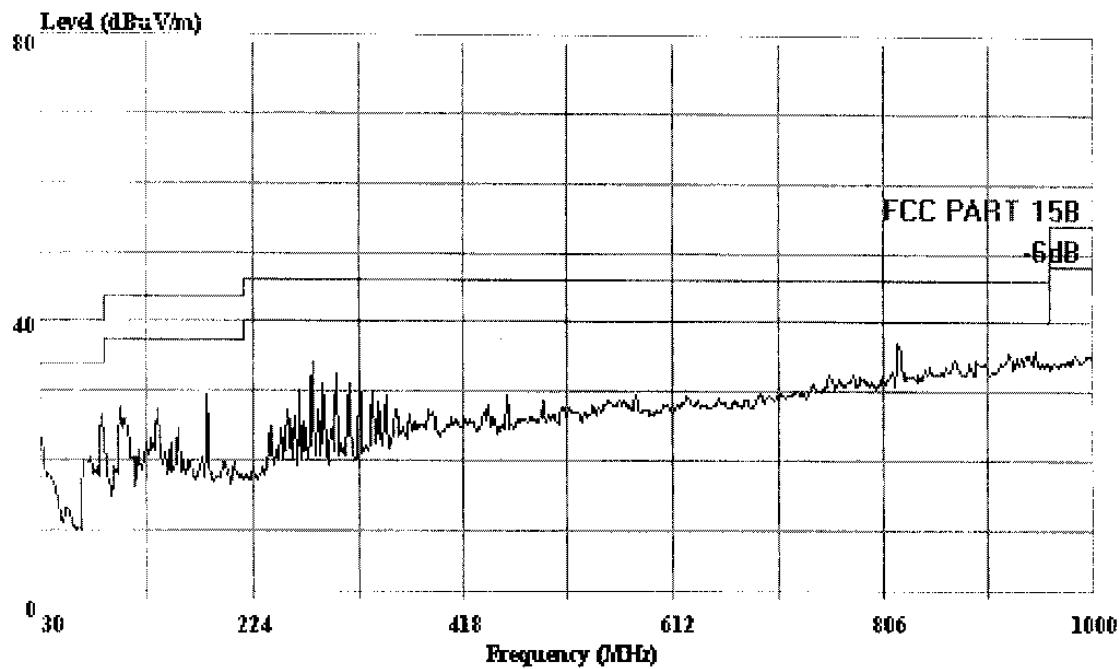

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2.598 FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : CD Playing



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:25:25

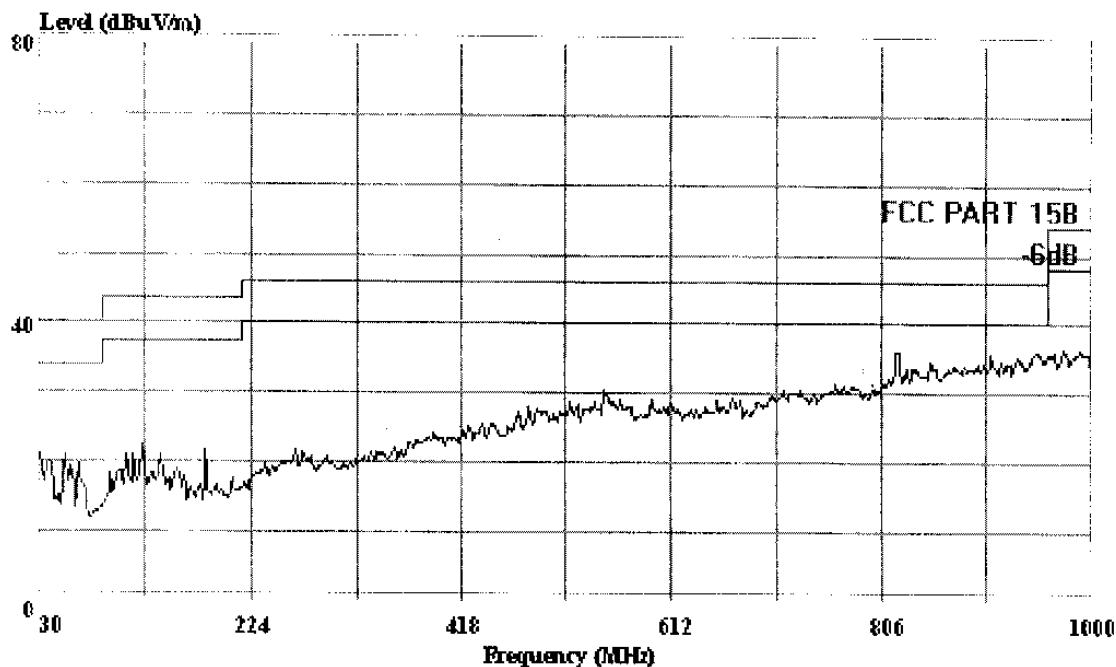


AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (# Chamber)
Trace: Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
EUT : 2.4G Cordless Phone w/radio & CD
M/N : GH3065
Power : Adaptor AC Input 120V/60Hz Output DC12V
Engineer:: Seco
Memo : Temp:24' Humi:54%
: CD Playing



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:12:21

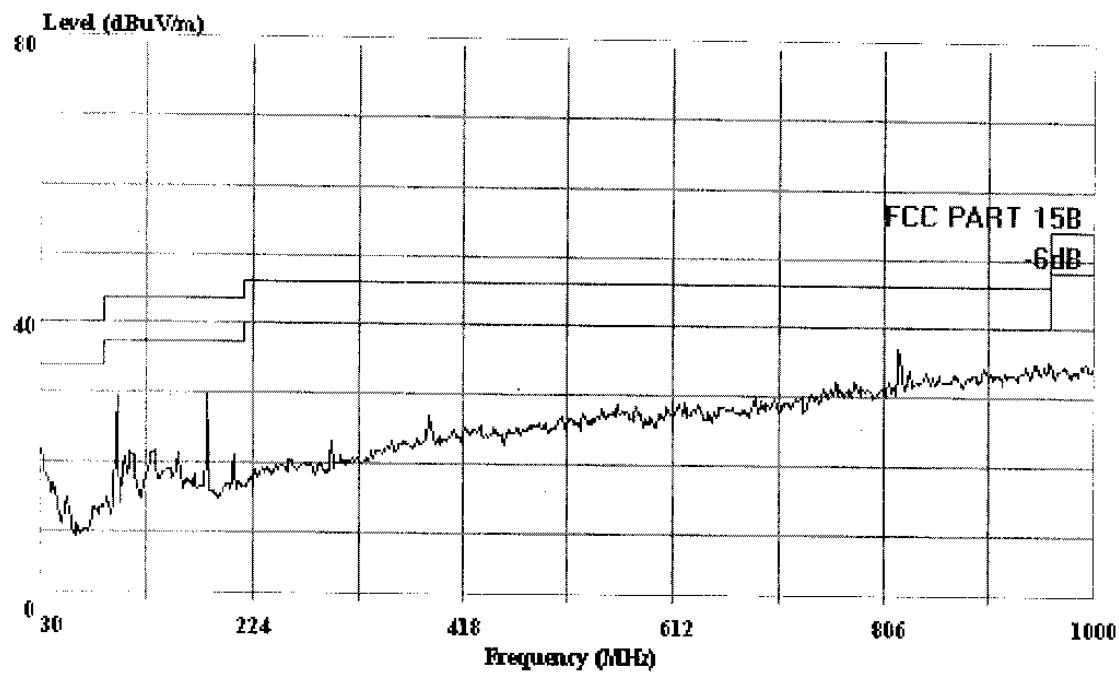

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Séco
 Memo : Temp:24' Humi:54%
 : FM88MHz



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:12:37

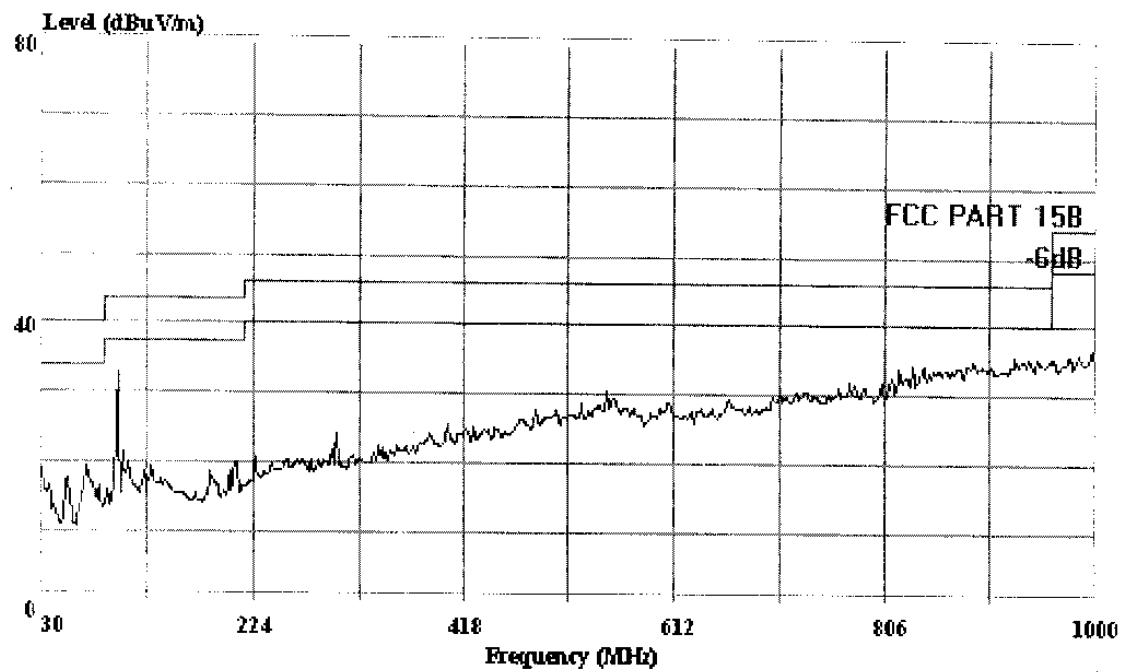

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : FM88MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:14:20

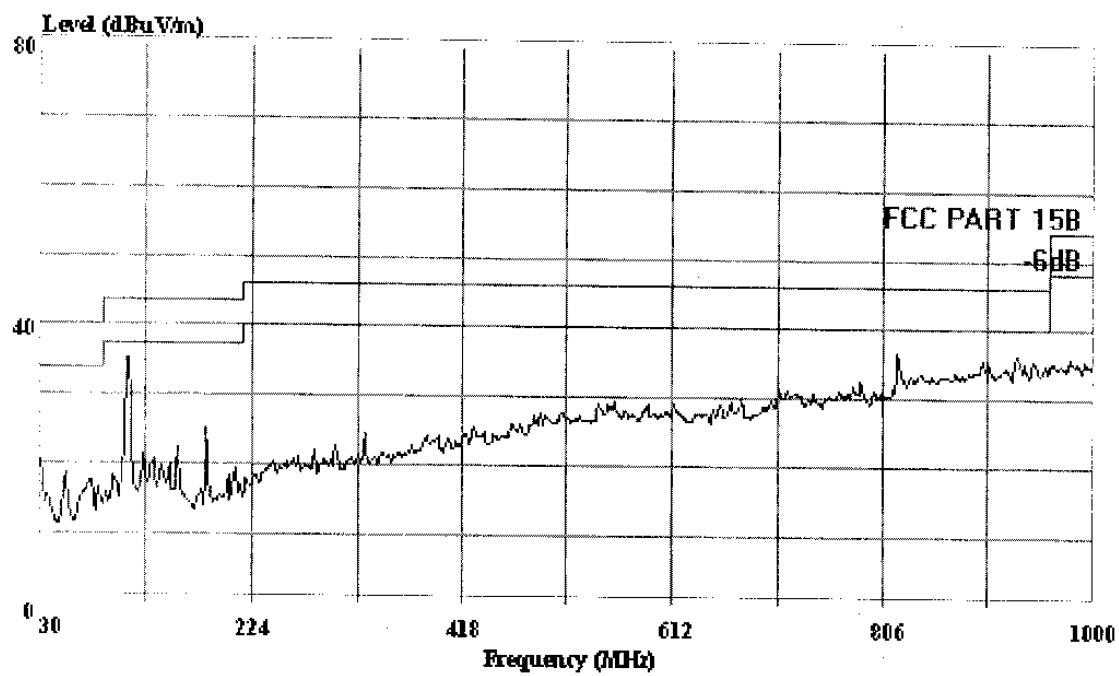

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : FM98MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:15:19

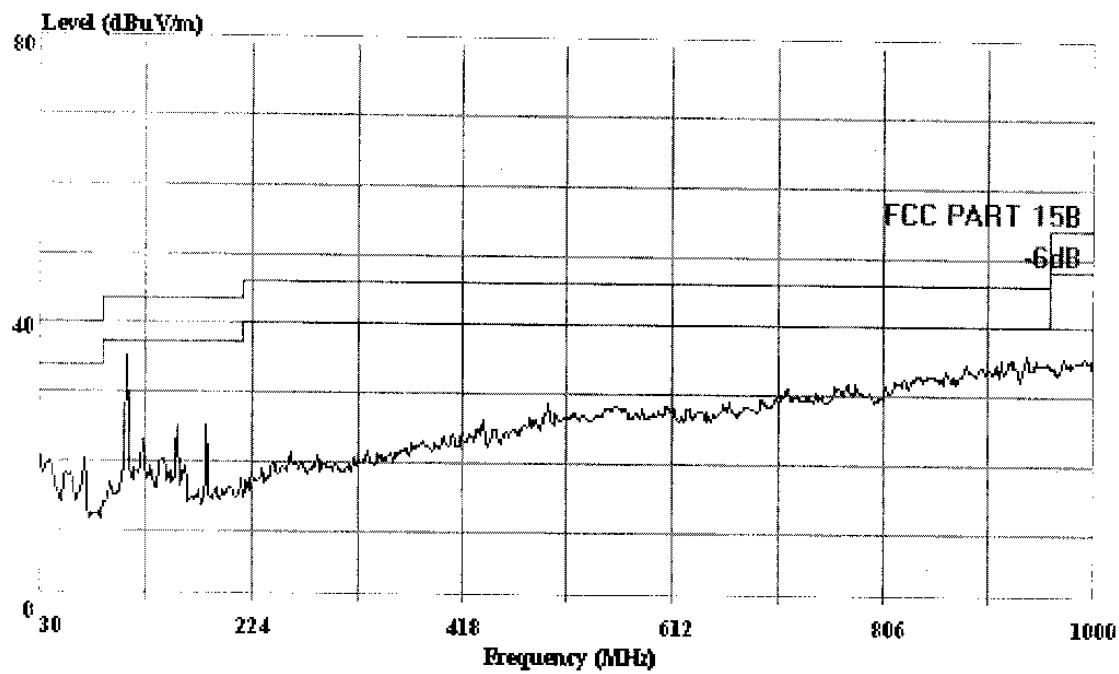

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24° Humi:54%
 : FM98MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:19:19

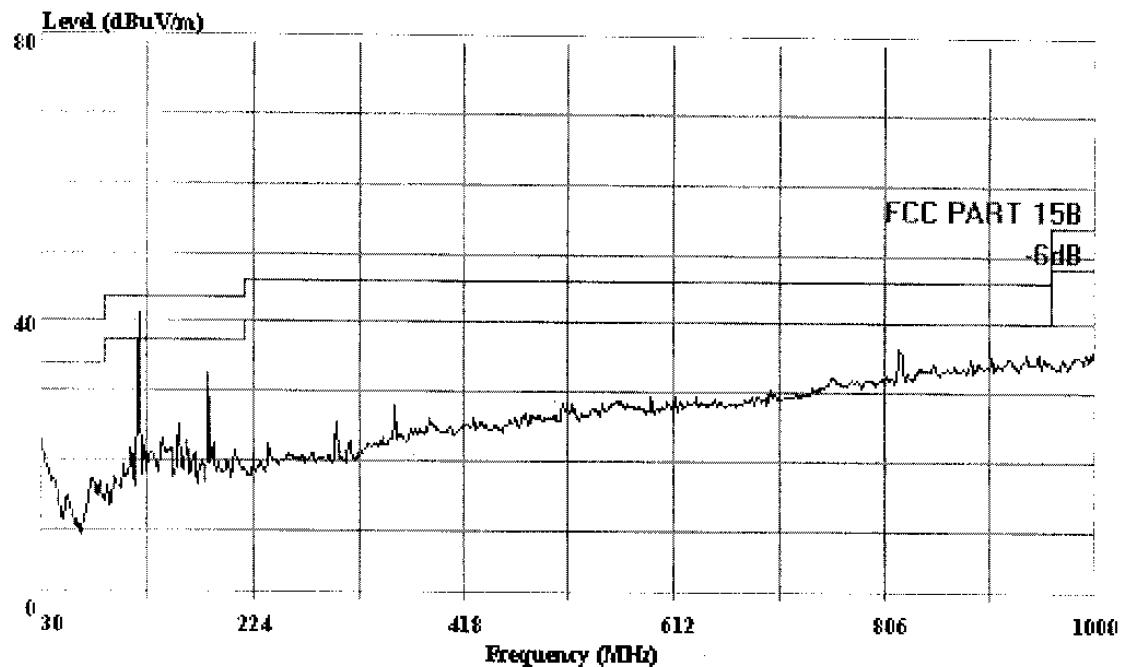

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24° Humi:54%
 : FM108MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:16:29

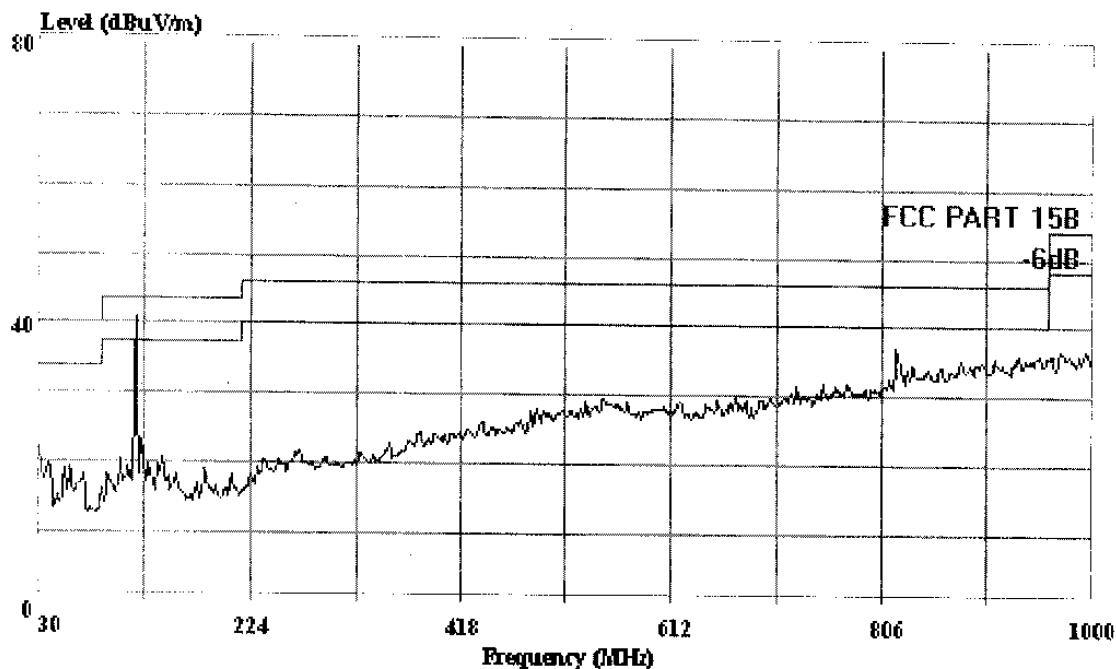

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24° Humi:54%
 : FM108MHz



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:00:46

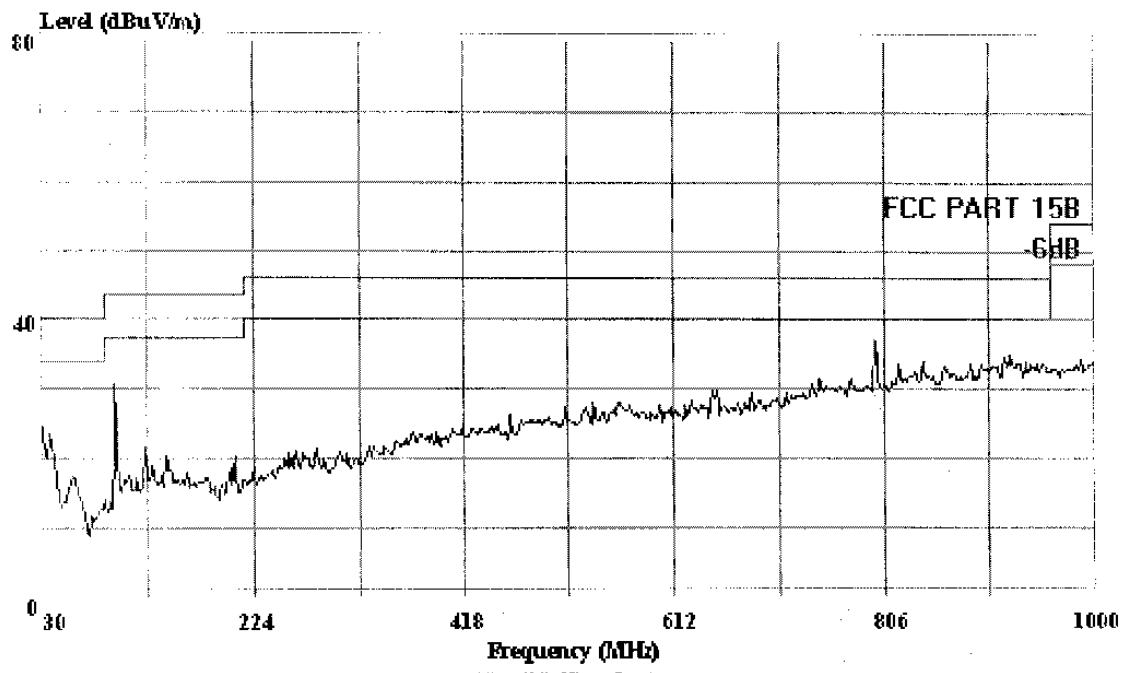

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2598 FACTOR HORIZONTAL
 DUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Base CH1



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Datafile: File#: Continental.EMI Date: 2004-02-03 Time: 21:00:31

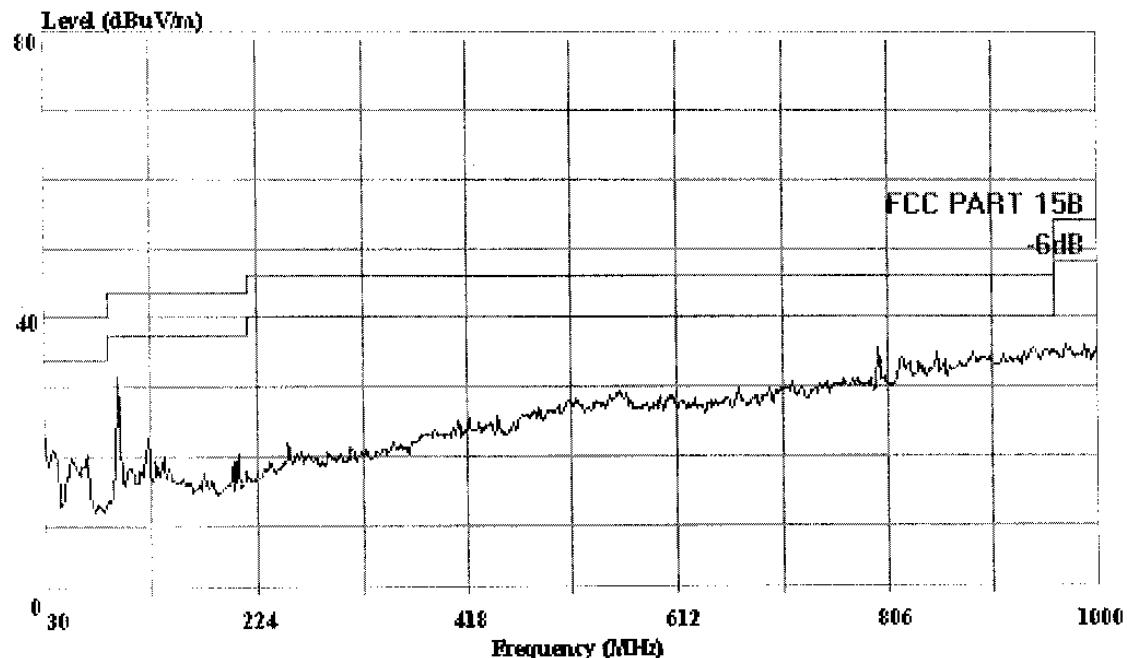

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2.598FACTOR VERTTICAL
 RUT : 2.4G Cordless Phone w/radio & CD
 M/N : GU3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24° Humi:54%
 : Base CH1



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:01:06

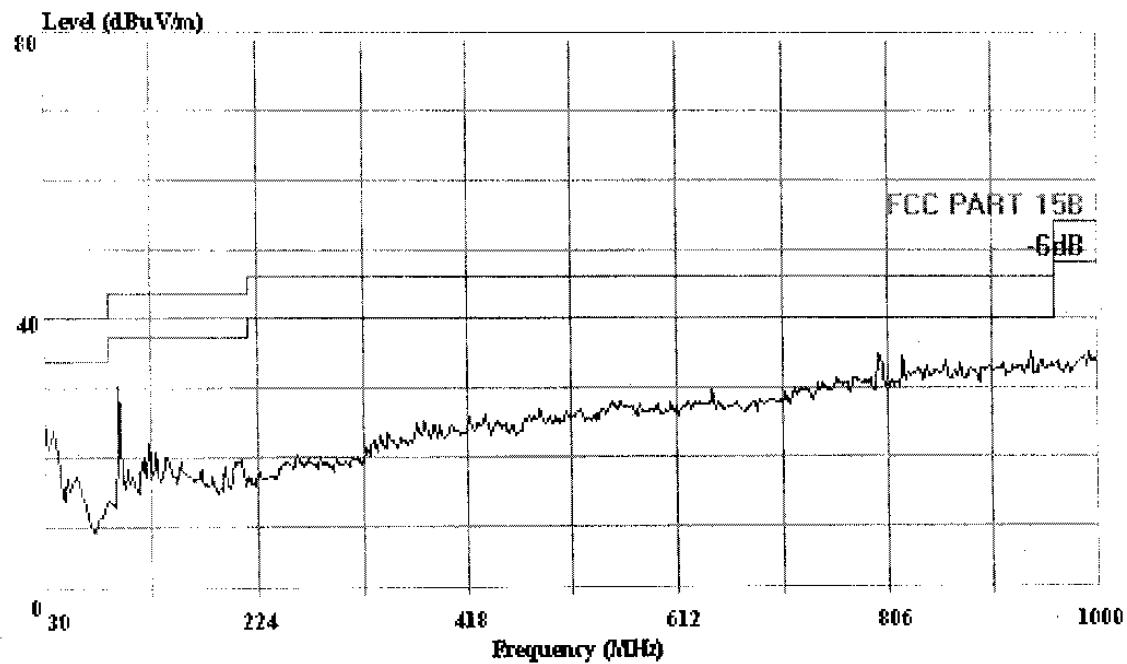

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2598 FACTOR HORIZONTAL
 FUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Base CH20



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:01:26

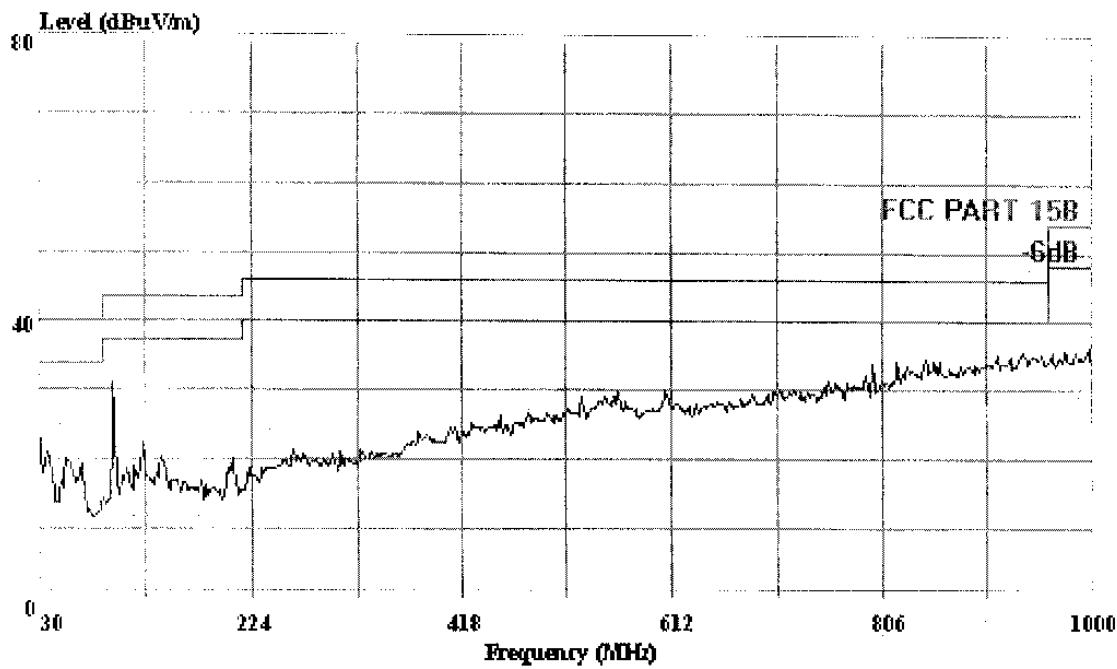

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24° Humi:54%
 : Base CH20



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:06:16

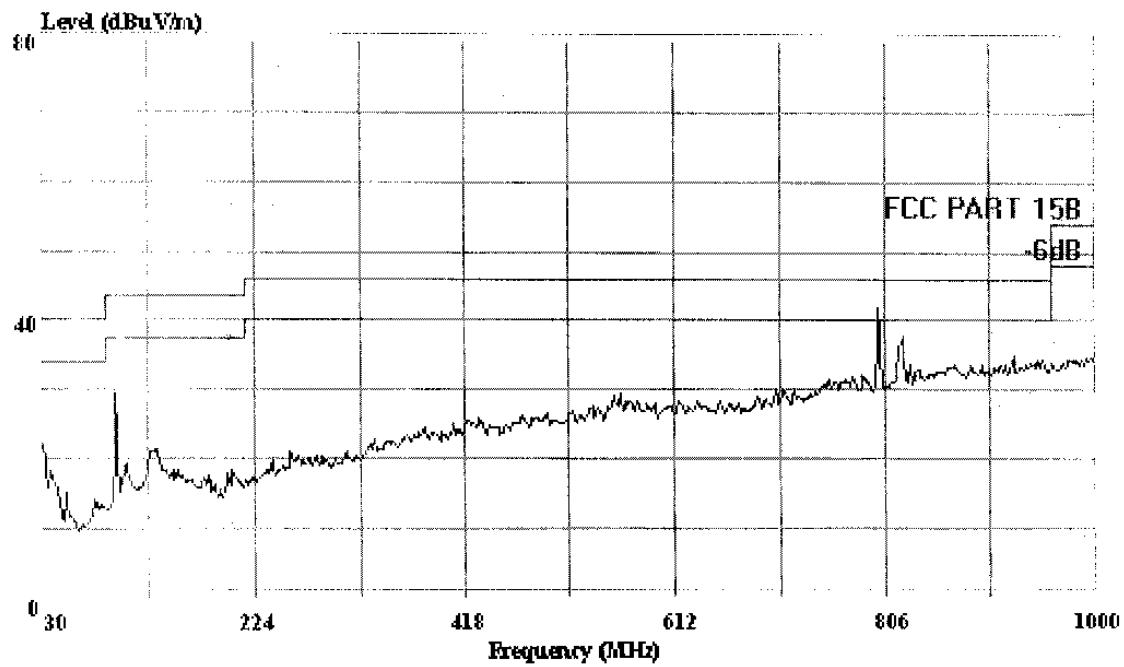

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. 3# Chamber

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2.598FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adantor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Base CH40



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 21:02:35

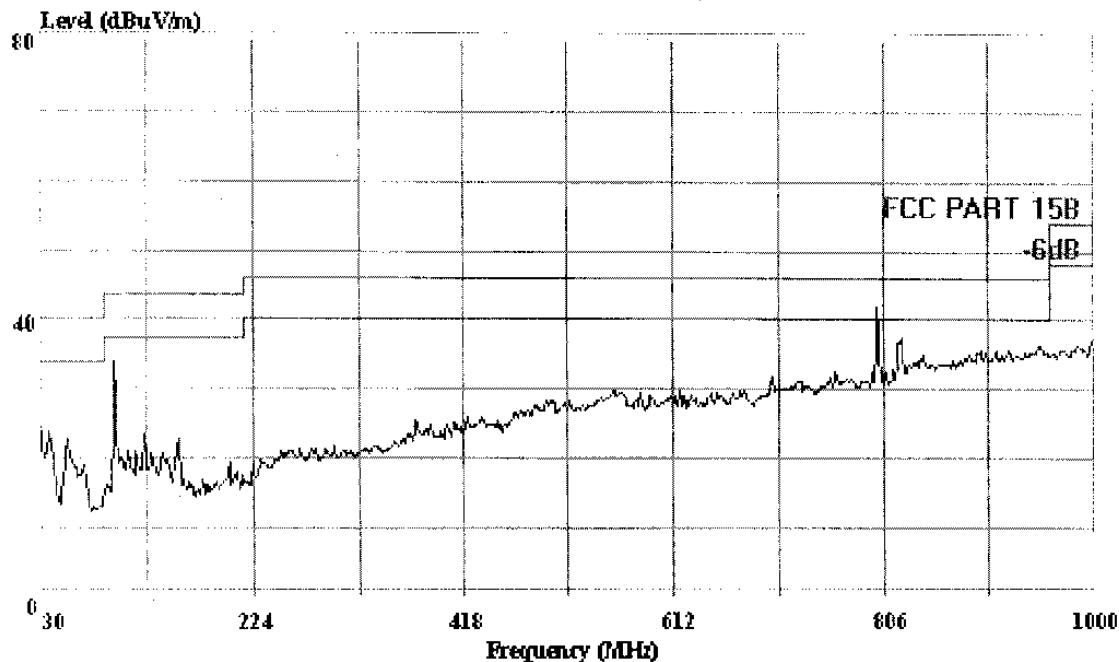

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Base CH40




信维科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 211 File#: C:\EMI TEST DATA\T\Continental.EMI

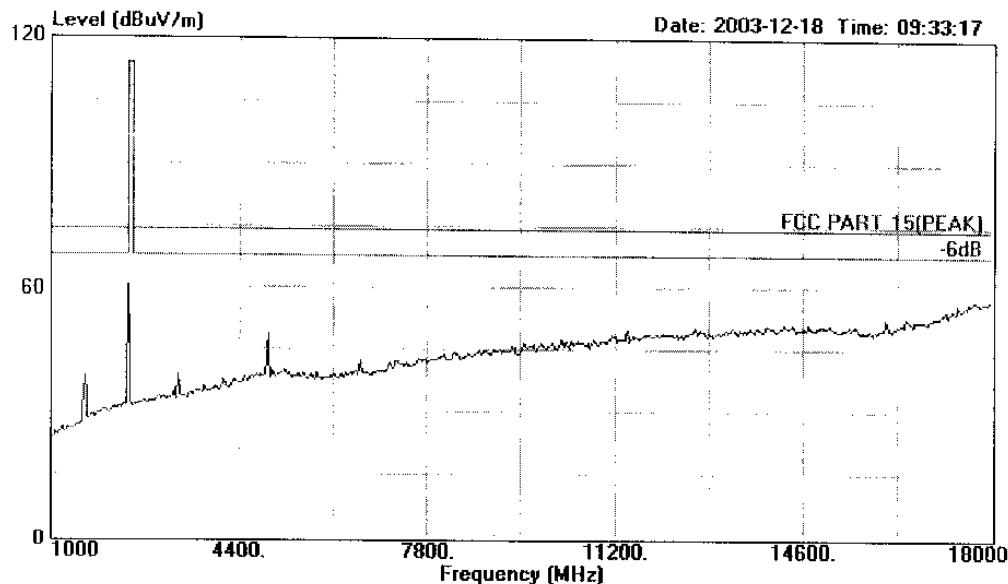

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 206 File#: C:\EMI TEST DATA\T\Continental.EMI

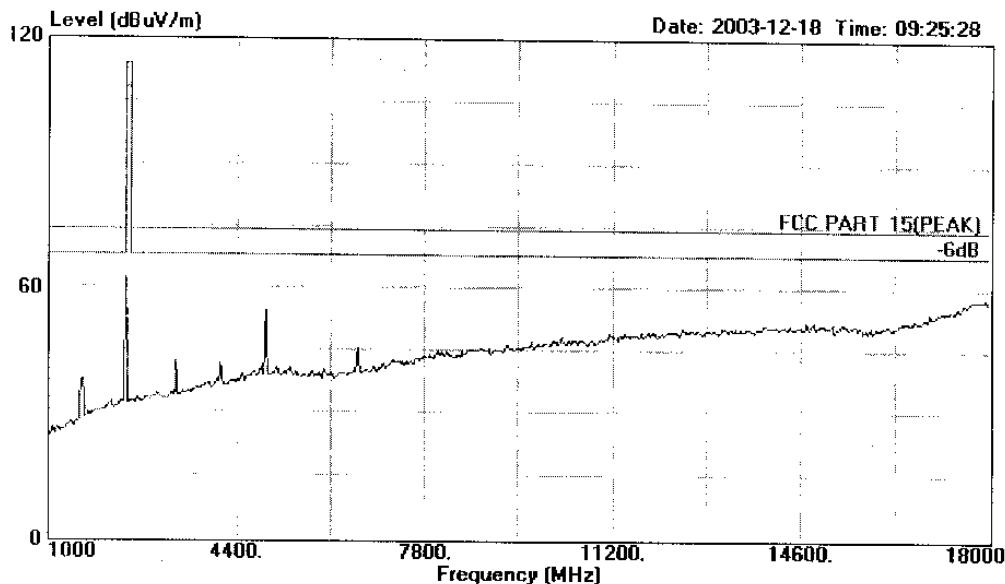

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 314 File#: C:\EMI TEST DATA\T\Continental.EMI

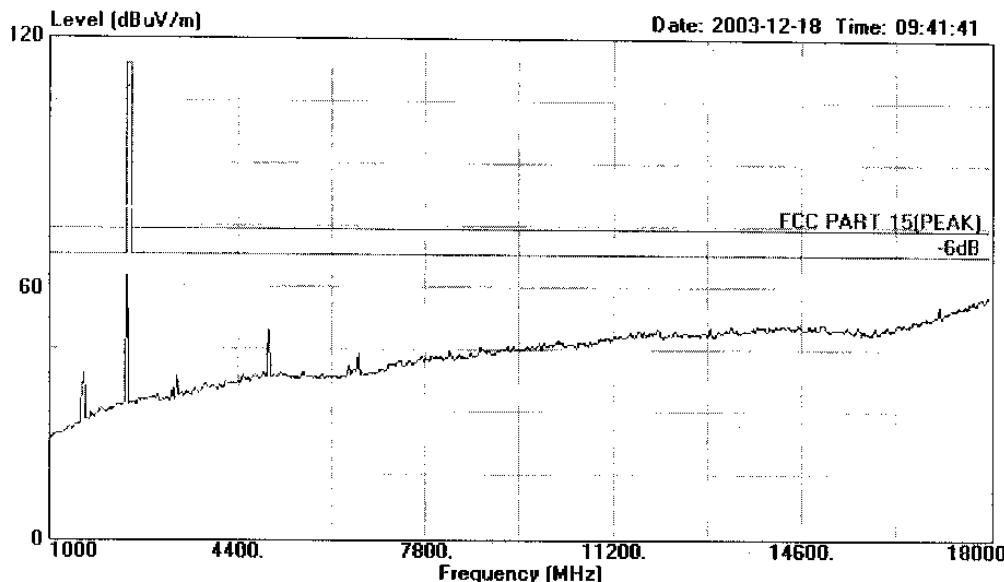

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%




信基科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 217 File#: C:\EMI TEST DATA\T\Continental.EMI

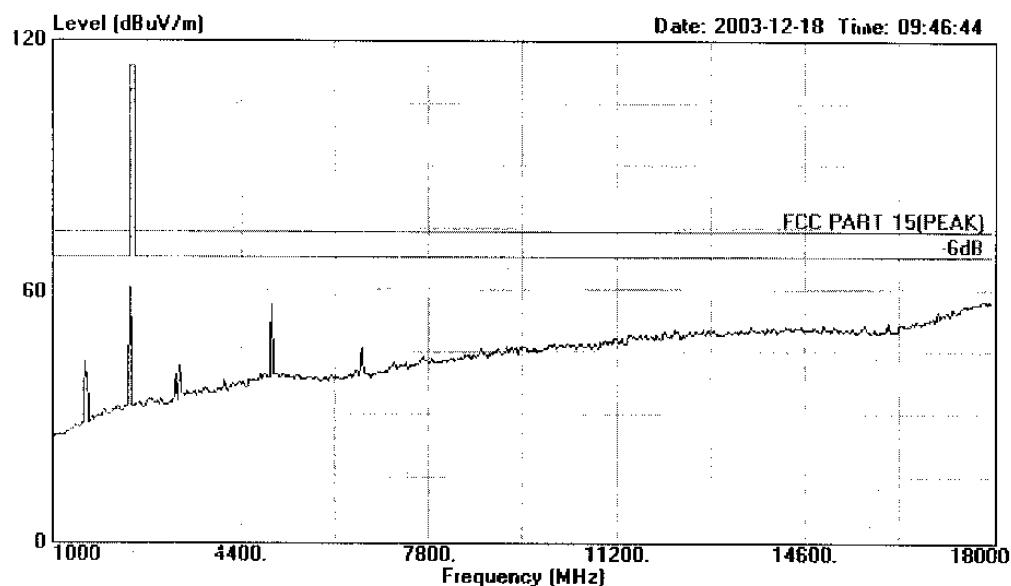

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 223 File#: C:\EMI TEST DATA\T\Continental.EMI

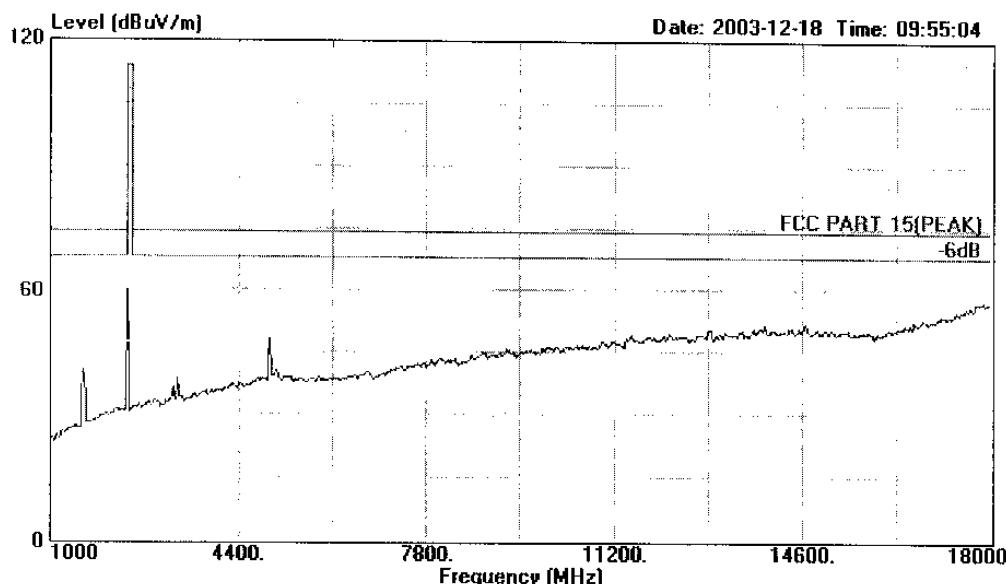

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH40
 Memo : Temp:24' Hum:56%




信基科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 220 File#: C:\EMI TEST DATA\T\Continental.EMI

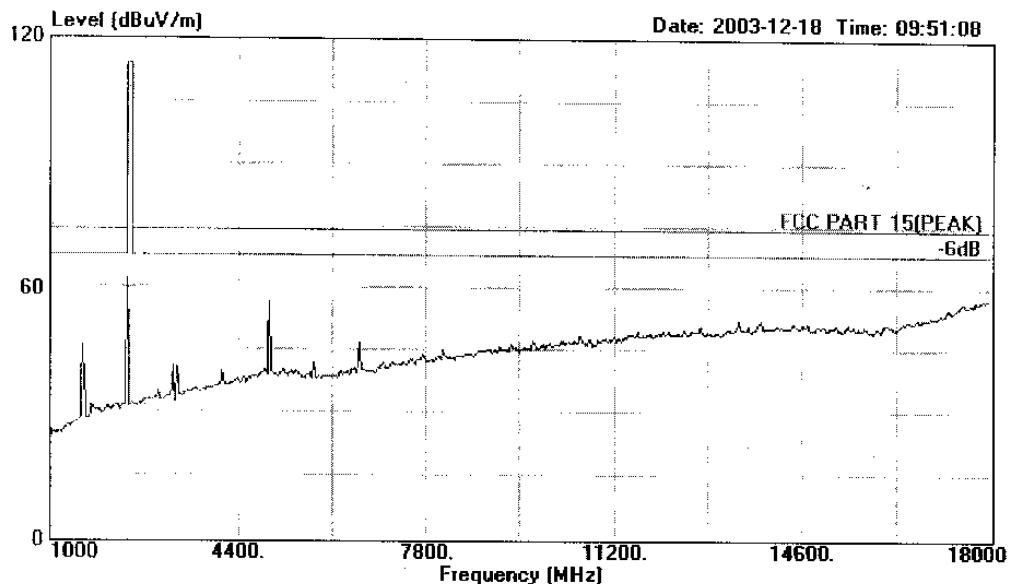

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH40
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 227 File#: C:\EMI TEST DATA\T\Continental.EMI

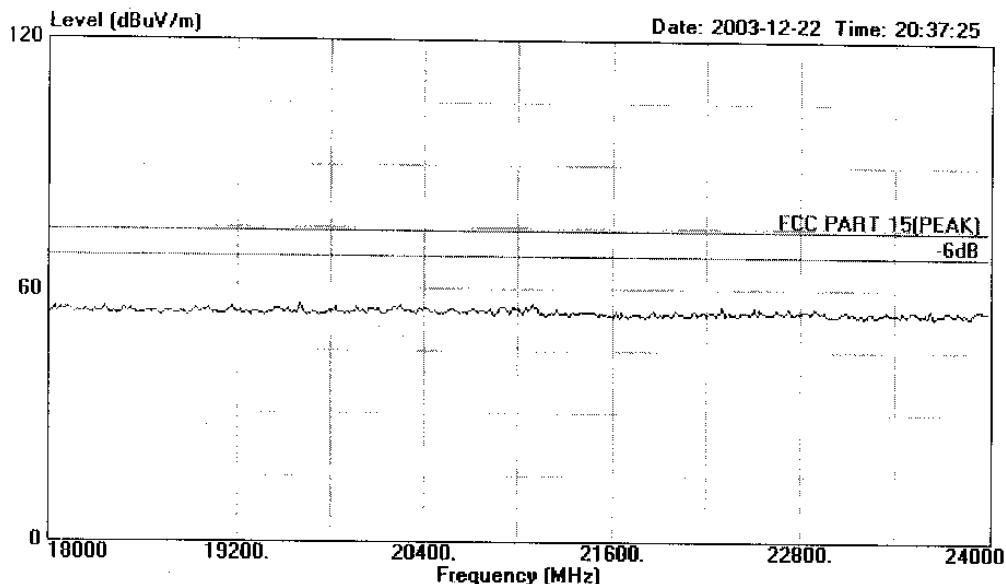

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24' Hum:56%




信维科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 226 File#: C:\EMI TEST DATA\T\Continental.EMI

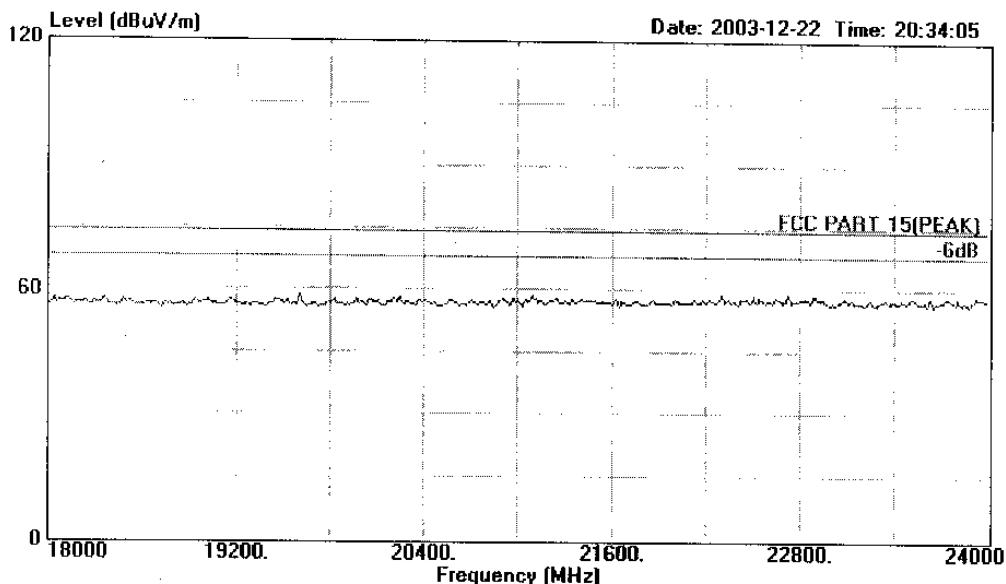

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH1
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 226 File#: C:\EMI TEST DATA\T\Continental.EMI

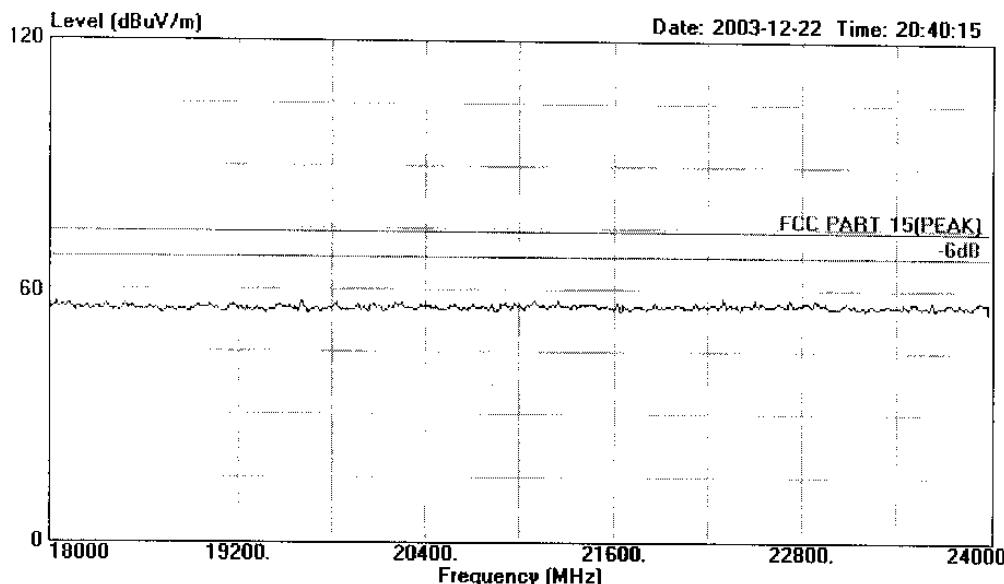

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 229 File#: C:\EMI TEST DATA\T\Continental.EMI

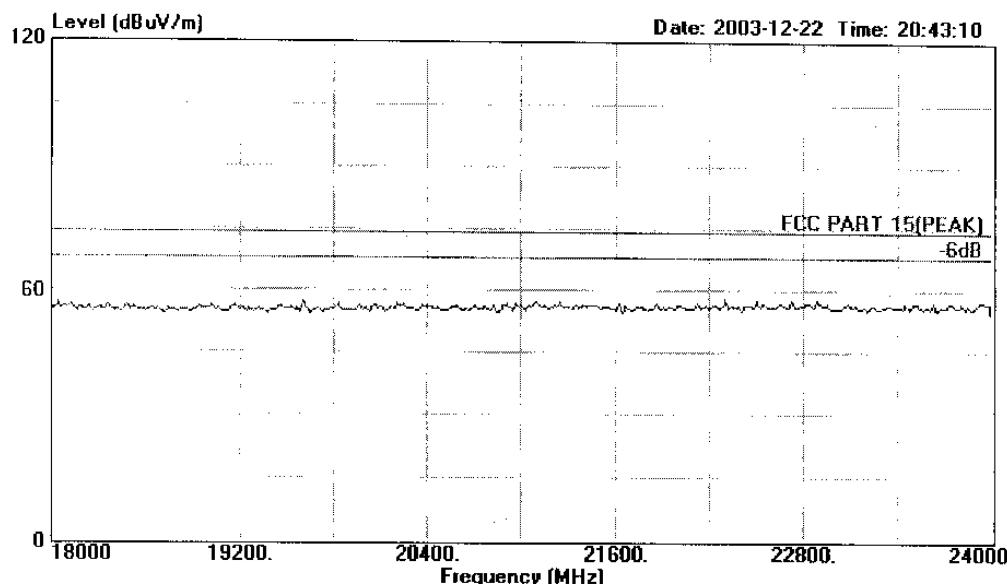

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH20
 Memo : Temp:24' Hum:56%




信基科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 230 File#: C:\EMI TEST DATA\T\Continental.EMI

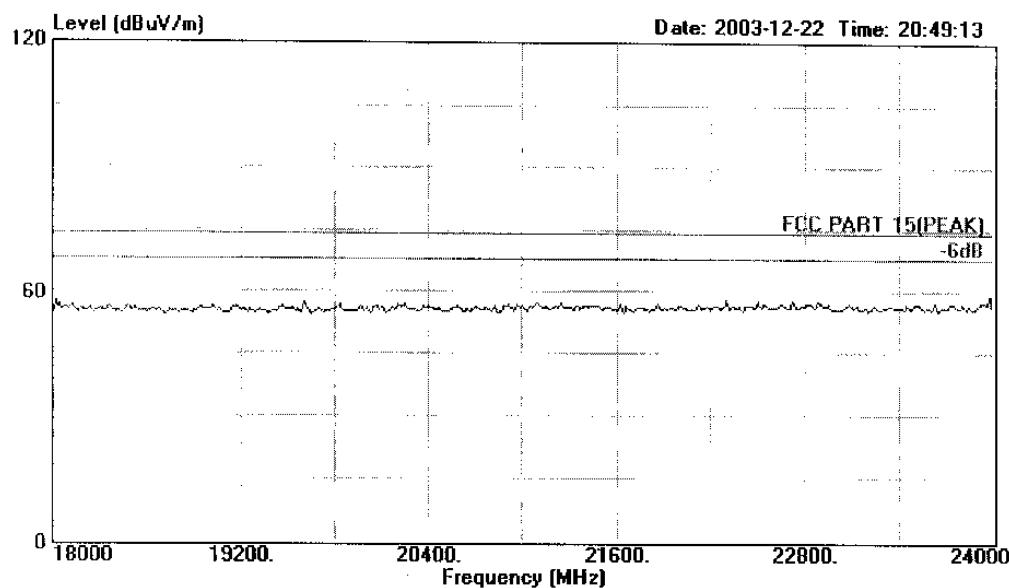

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH40
 Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 231 File#: C:\EMI TEST DATA\T\Continental.EMI

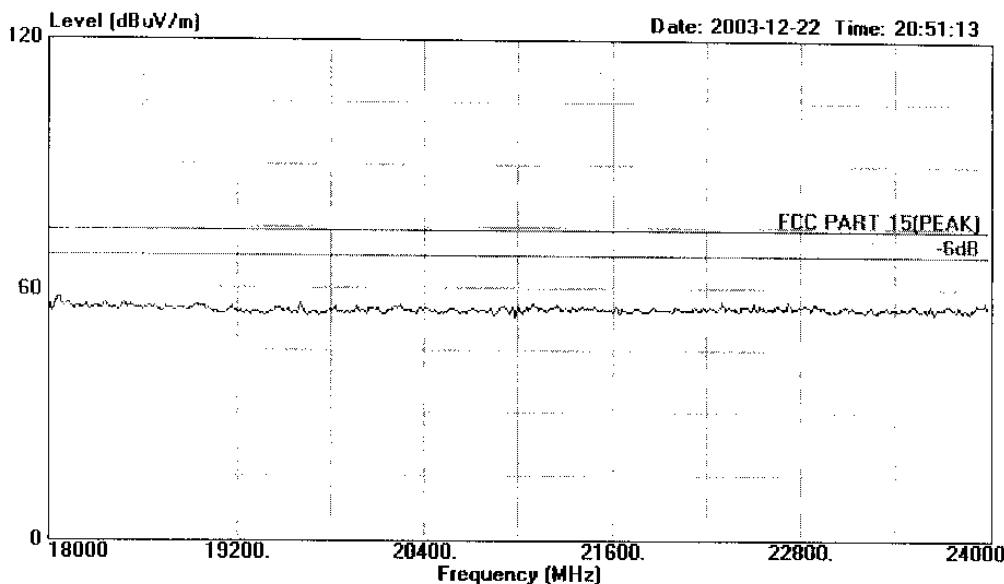


Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 H/N : GH3065
 Power : Adaptor AC Input 120V/60Hz Output DC12V
 Test Engineer : Seco
 Memo : Base CH40
 Memo : Temp:24' Hum:56%



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 20:42:55

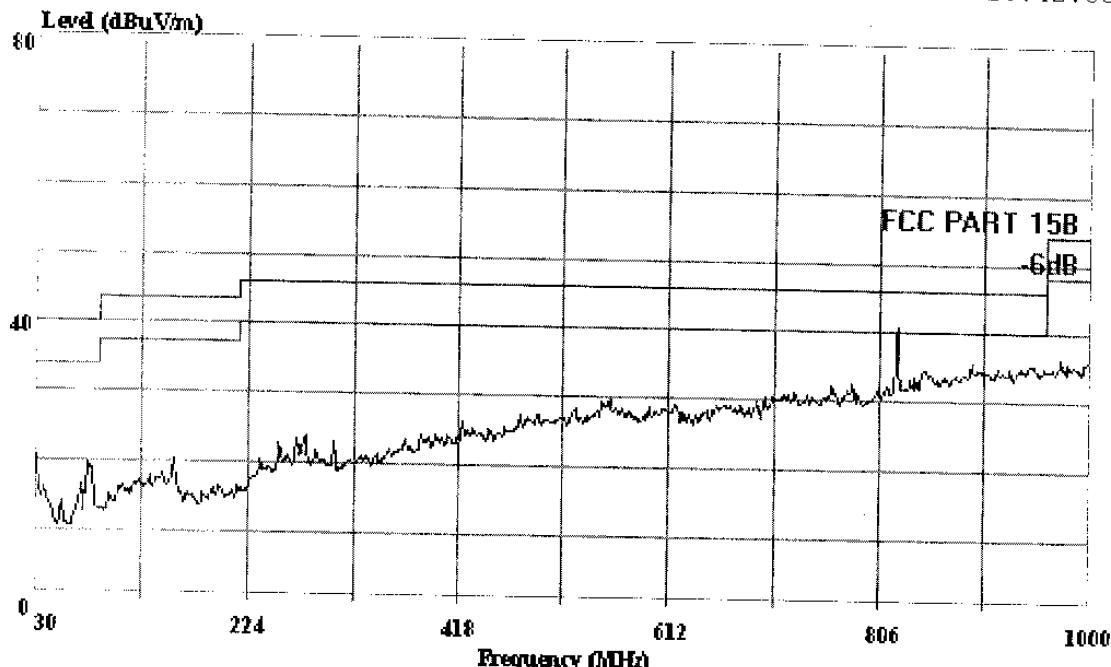

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2.598FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Handset CH1



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 20:40:51

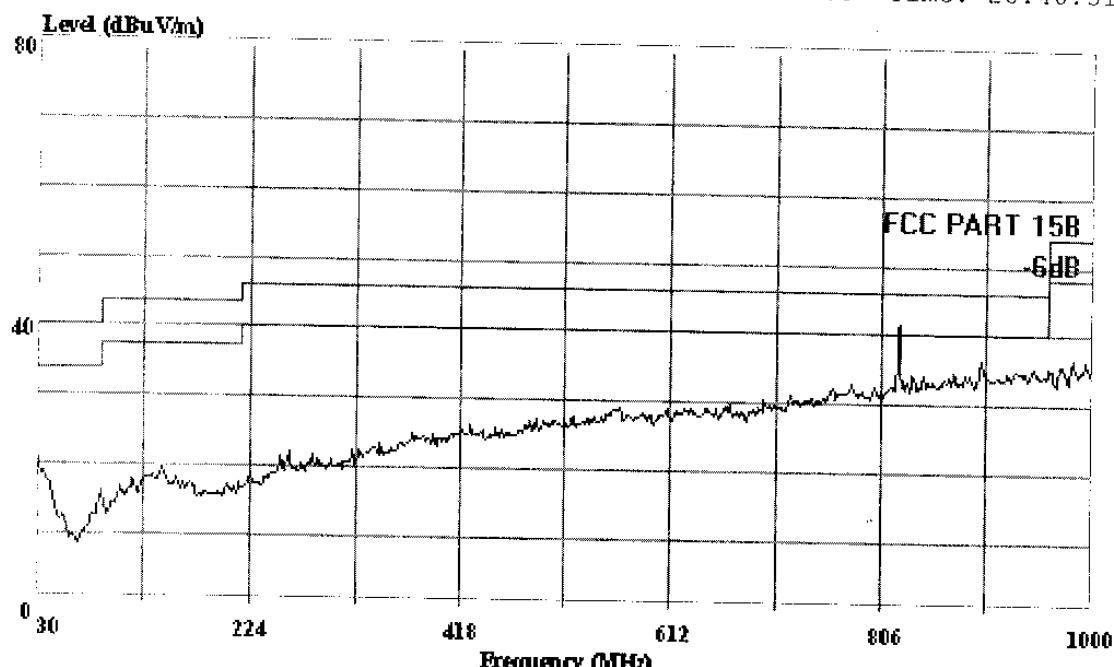

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2.598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Engineer: Seco
 Memo : Temp:24° Humi:54%
 : Handset CH1



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 20:45:12

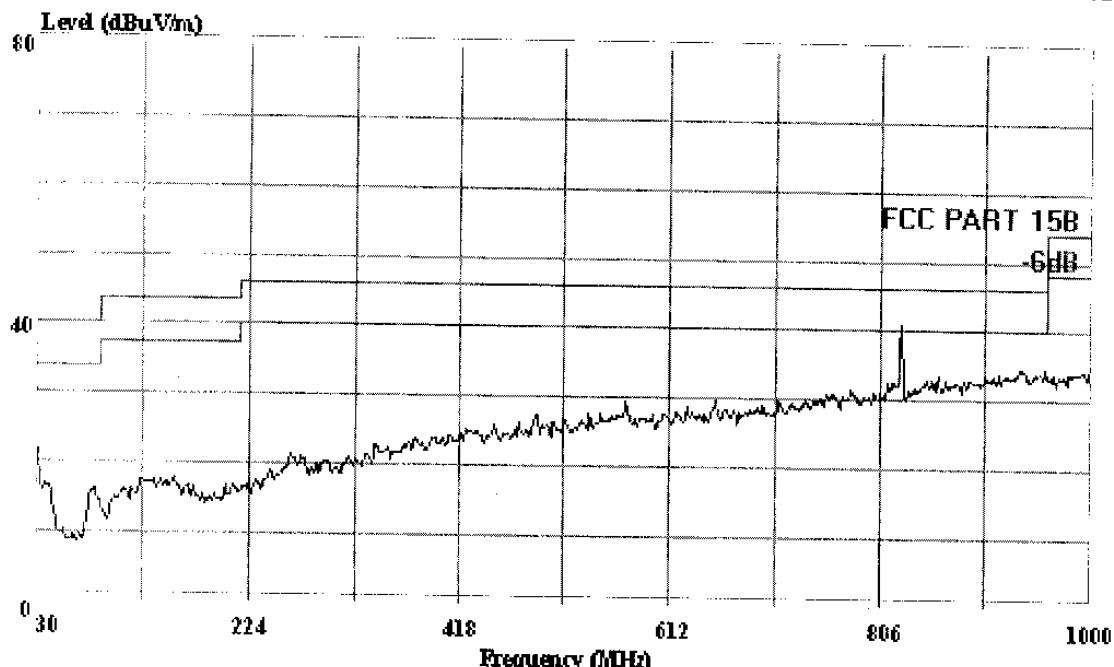

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 RUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Engineer:: Seco
 Memo : Temp:24° Humi:54%
 : Handset CH20



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 20:43:56

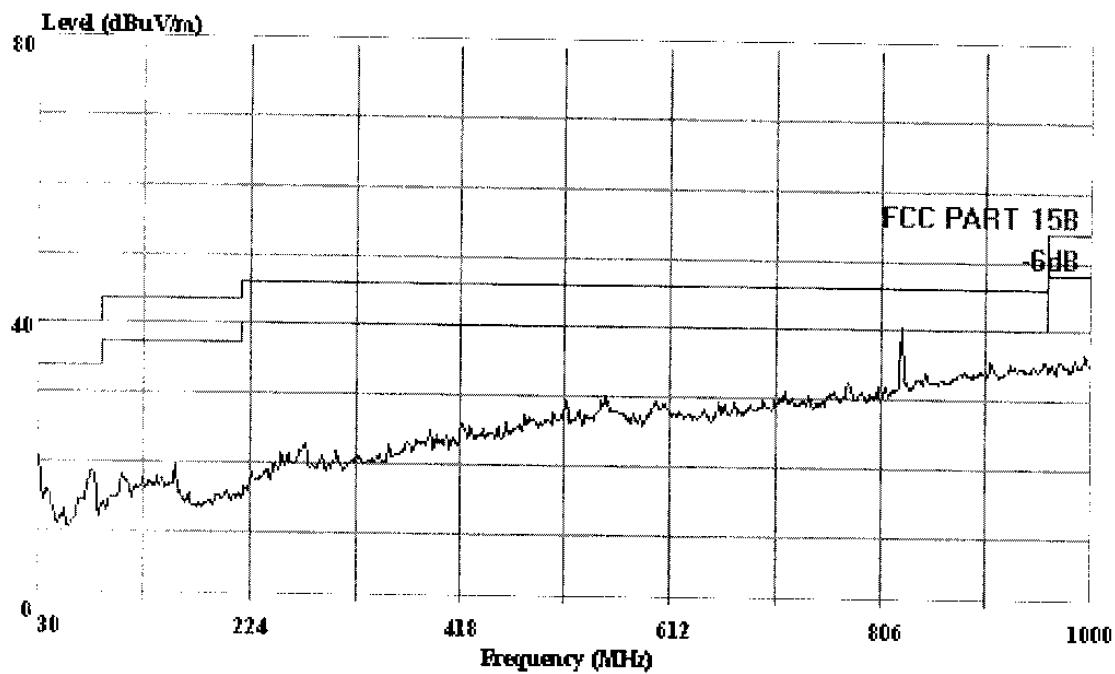

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2.598FACTOR VERTTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Handset CH20



Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 20:46:23

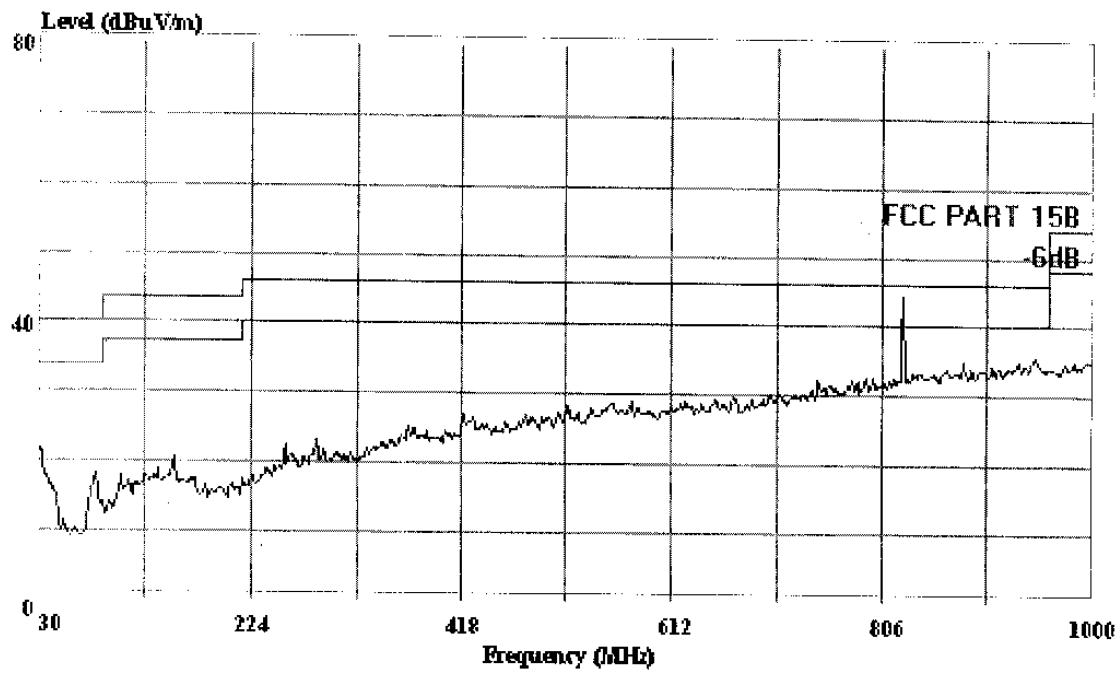

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Engineer:: Seco
 Memo : Temp:24' Humi:54%
 : Handset CH40



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Continental.EMI Date: 2004-02-03 Time: 20:50:35

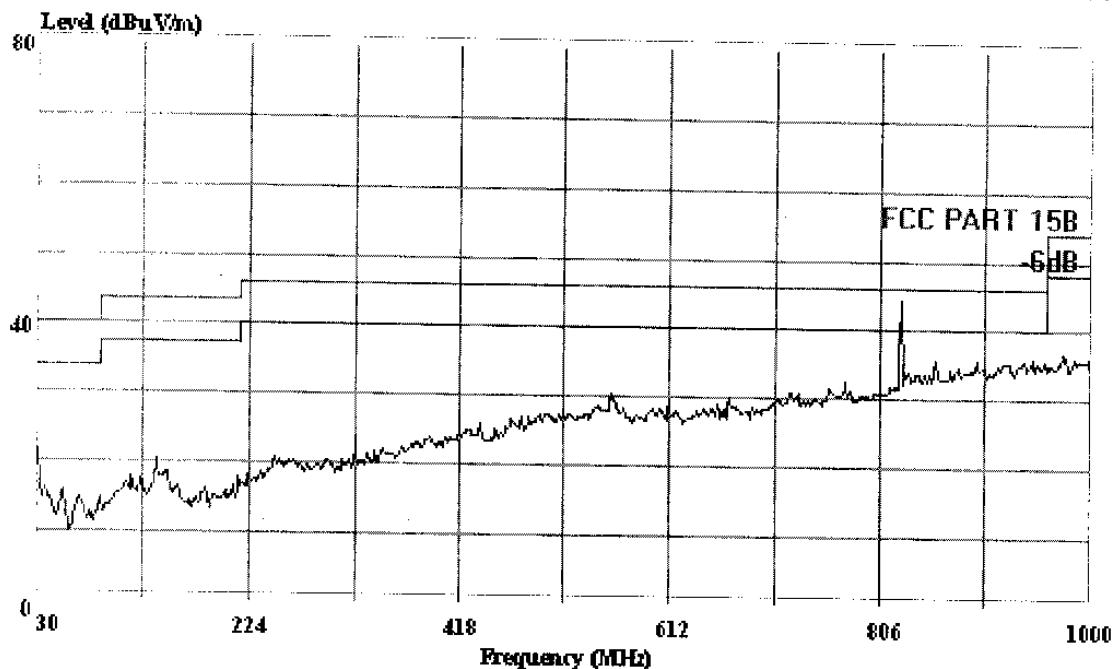

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Engineer: Seco
 Memo : Temp:24' Humi:54%
 : Handset CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 190 File#: C:\EMI TEST DATA\T\Continental.EMI

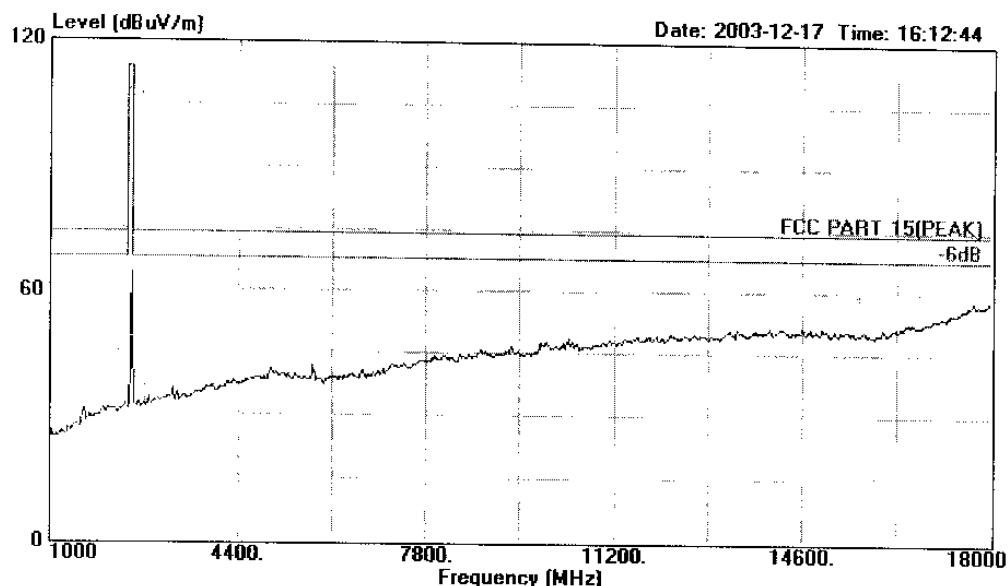

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 193 File#: C:\EMI TEST DATA\T\Continental.EMI

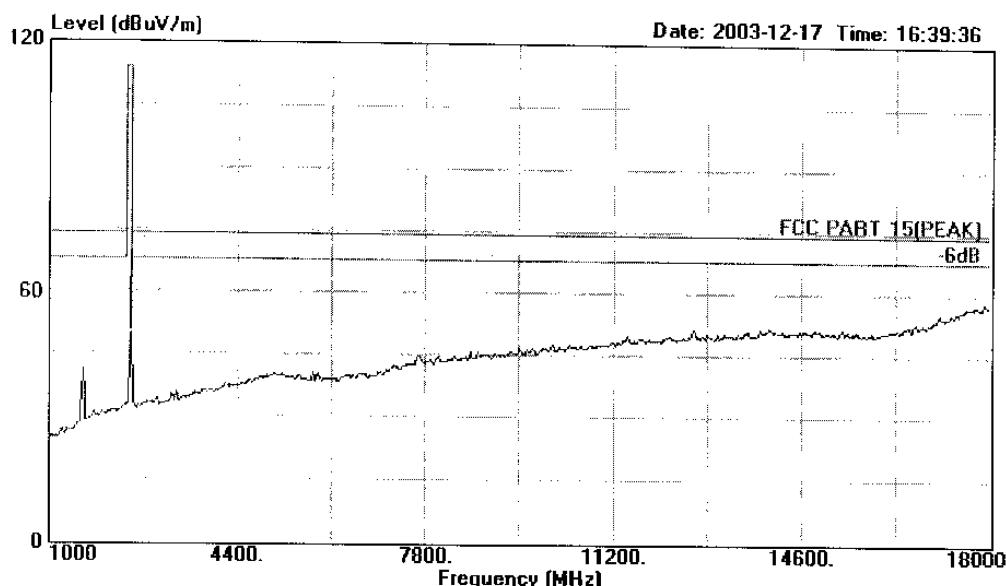

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 199 File#: C:\EMI TEST DATA\T\Continental.EMI

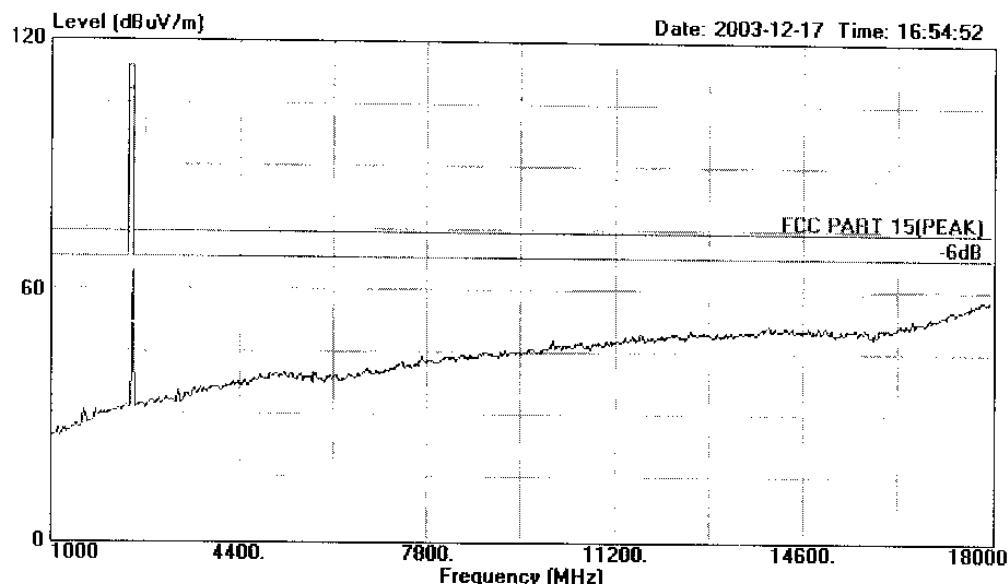

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH20
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 196 File#: C:\EMI TEST DATA\T\Continental.EMI

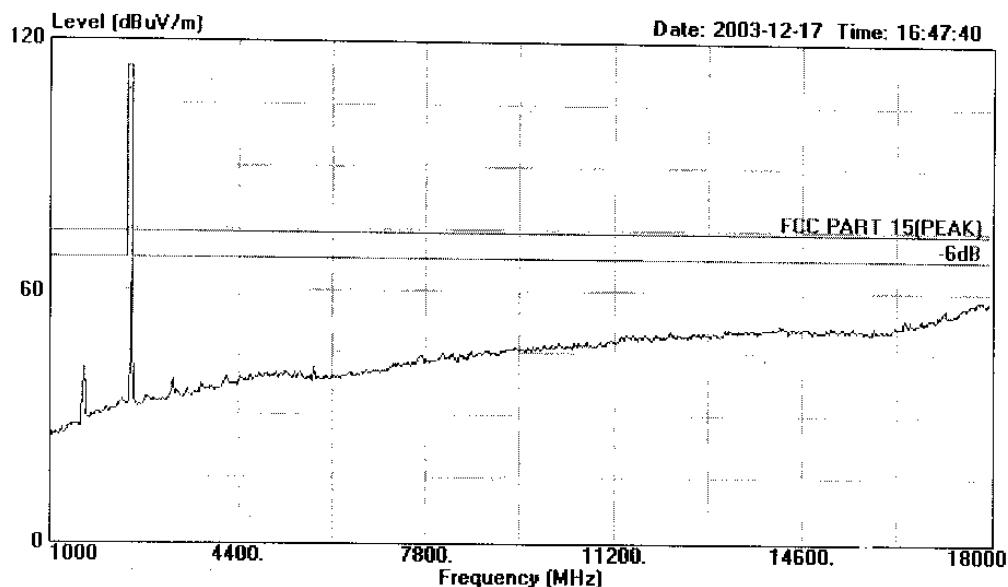

Site : 1# Chamber
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH20
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 202 File#: C:\EMI TEST DATA\T\Continental.EMI

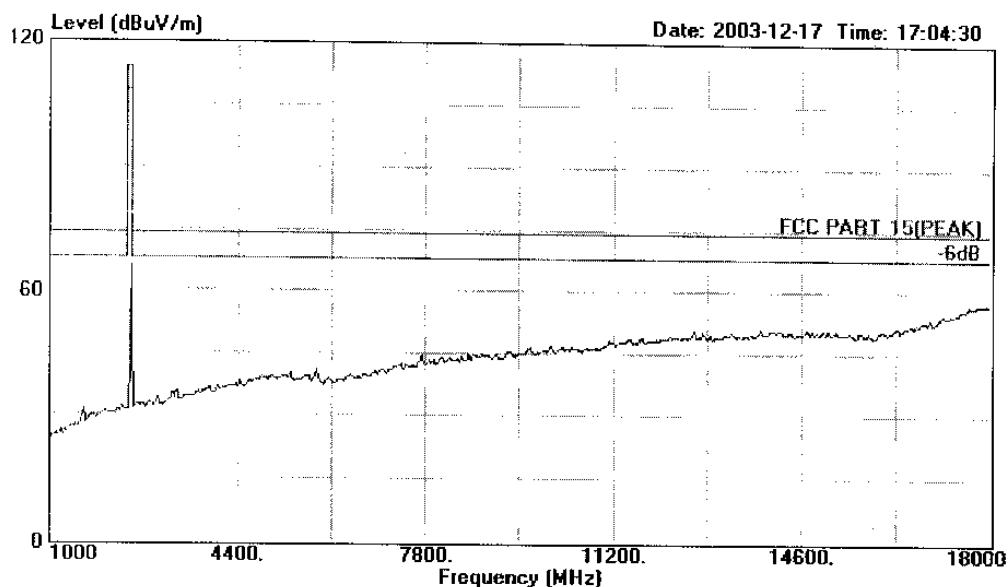

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 205 File#: C:\EMI TEST DATA\T\Continental.EMI

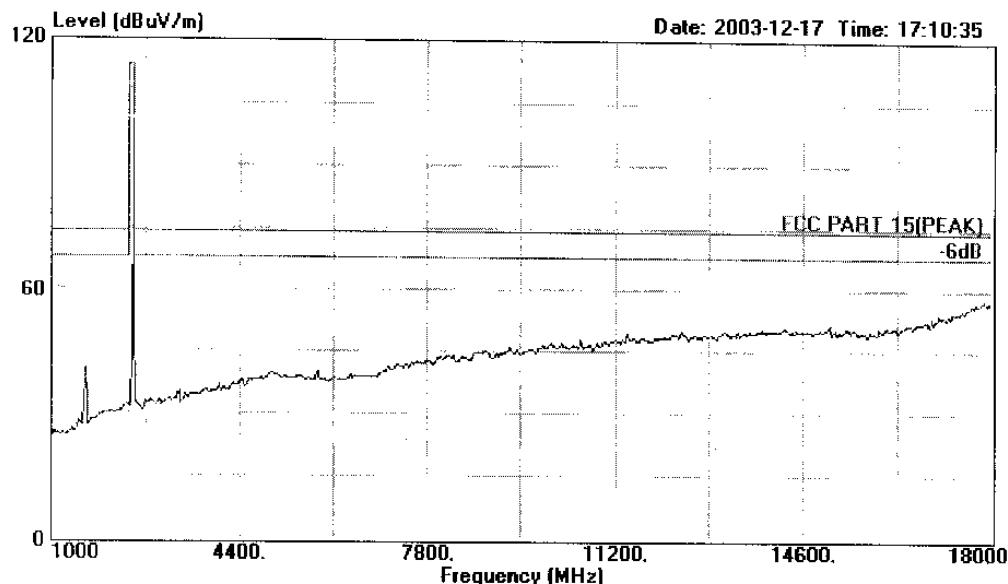

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 233 File#: C:\EMI TEST DATA\T\Continental.EMI

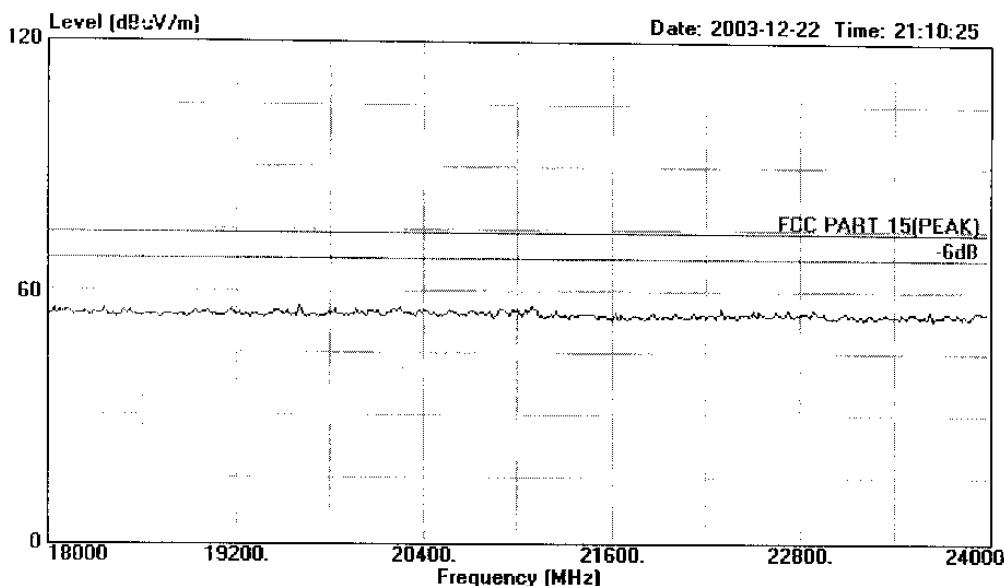

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24° Hum:56%




信基科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 232 File#: C:\EMI TEST DATA\T\Continental.EMI

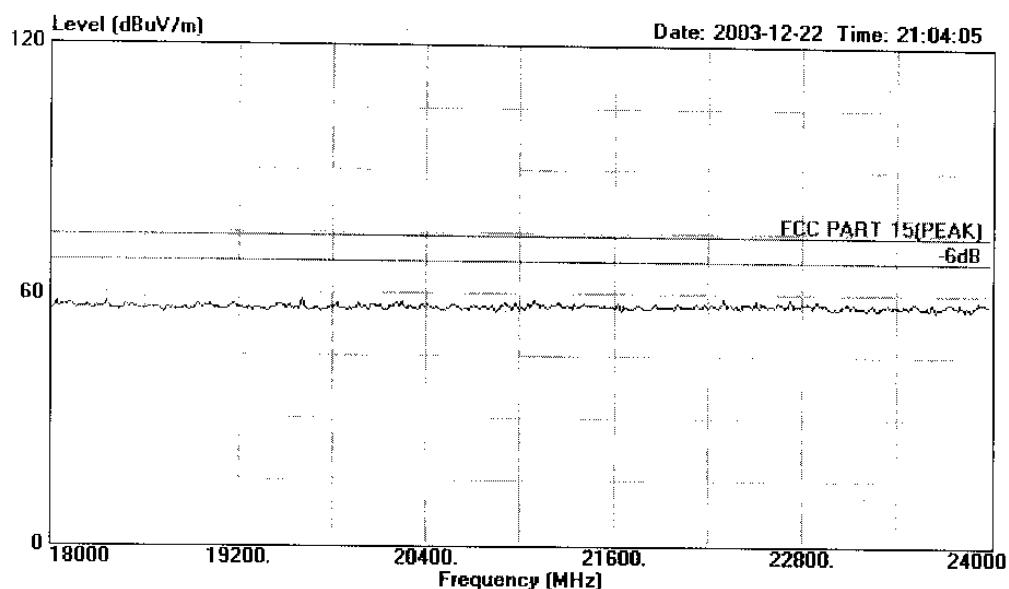

Site : 1# Chamber
 Condition : FCC PART 15(PeAK) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH1
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 234 File#: C:\EMI TEST DATA\T\Continental.EMI

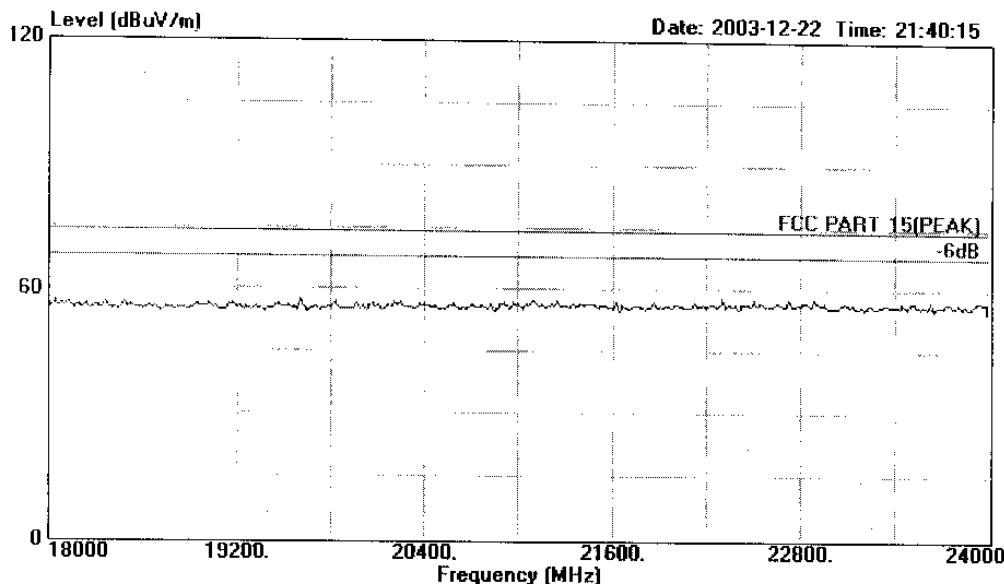

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH20
 Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 235 File#: C:\EMI TEST DATA\T\Continental.EMI

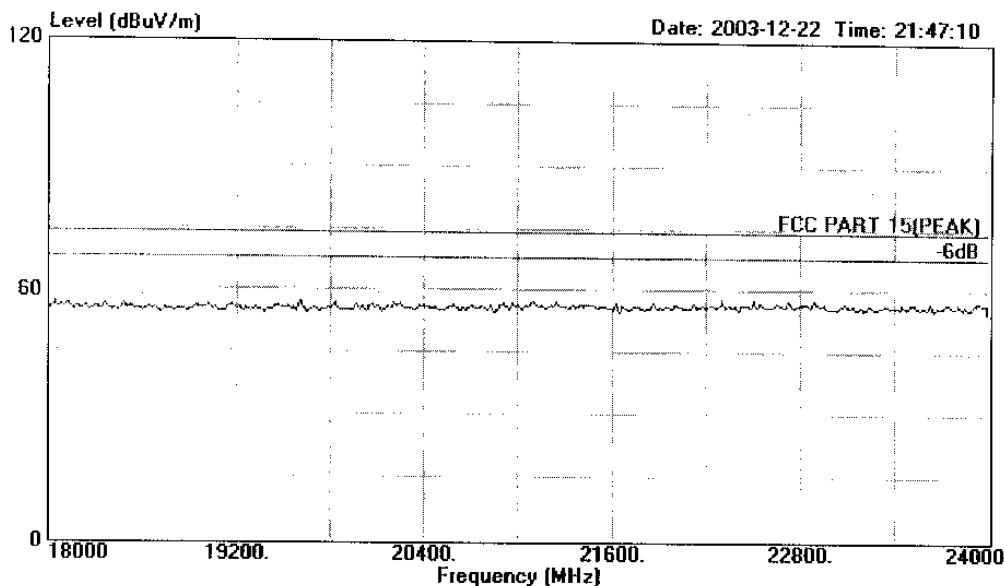

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH20
 Memo : Temp:24' Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 236 File#: C:\EMI TEST DATA\T\Continental.EMI

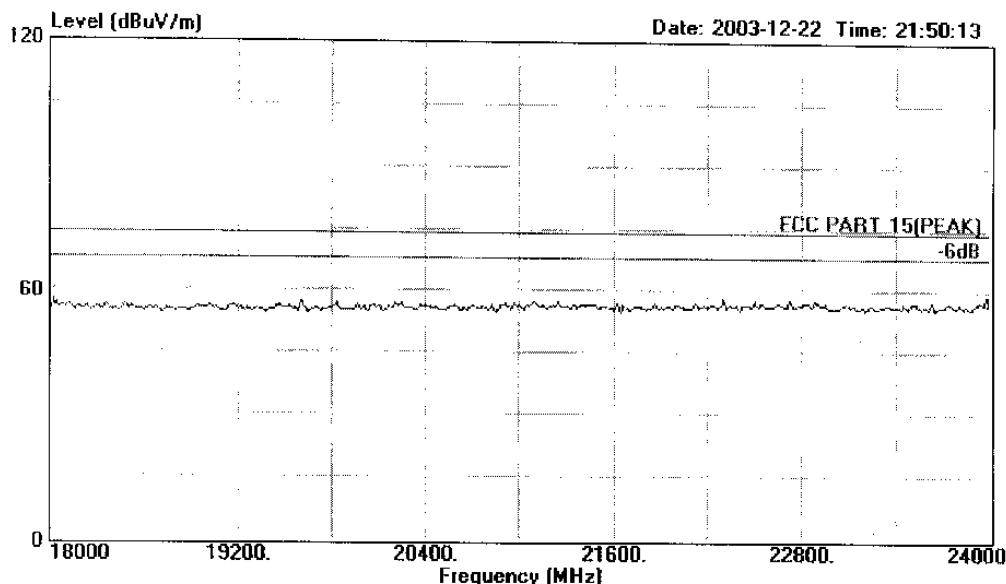

Site : 1# Chamber
 Condition : FCC PART 15(Peak) 3m 3115FACTOR HORIZONTAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24° Hum:56%




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,
 Shenzhen Science & Industry Park
 Nantou, Shenzhen, Guangdong, China
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 237 File#: C:\EMI TEST DATA\T\Continental.EMI

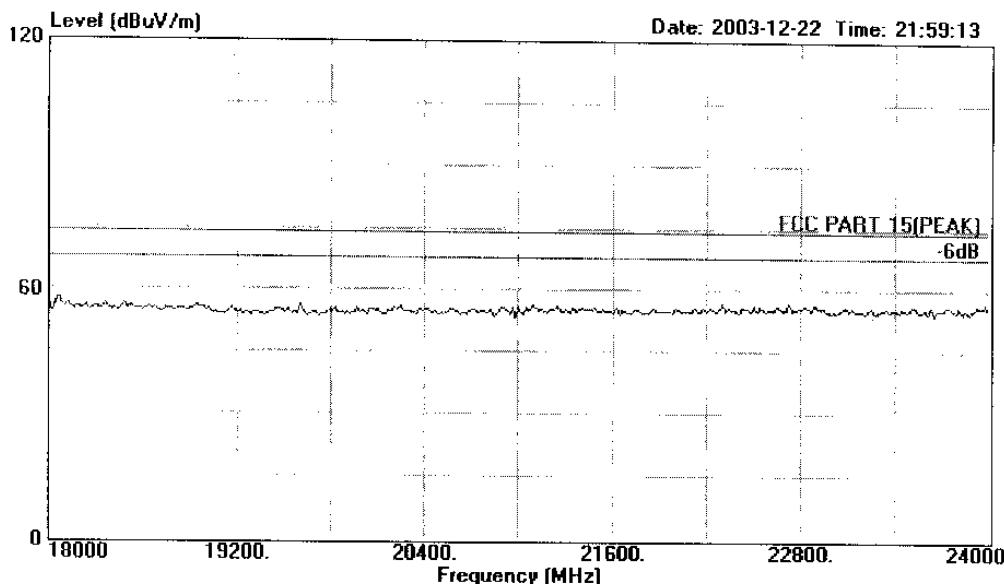

Site : 1# Chamber
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
 EUT : 2.4G Cordless Phone w/radio & CD
 M/N : GH3065
 Power : DC 3.6V
 Test Engineer : Seco
 Memo : Handset CH40
 Memo : Temp:24° Hum:56%