

Straubing, 22 March 2006

TEST-REPORT

No. 50511-40907-4 (Edition 2)

for

Solid Radar FMR 25x

Level Measuring Transmitter

Applicant: Endress & Hauser GmbH & Co. KG

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207 and 15.209

Limited Testing for Class II Permissive
Change to include additional antennas (3"
and 4" horn antennas with either DN 80 and
DN100 flange)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

| | | |
|-----|---|----|
| 1 | Description of the Equipment Under Test (EUT)..... | 3 |
| 2 | Administrative Data..... | 4 |
| 3 | Identification of the Test Laboratory..... | 5 |
| 4 | Summary | 6 |
| 5 | Operation Mode and Configuration of EUT..... | 7 |
| 6 | Measuring Methods | 8 |
| 6.1 | Radiated emission in Fully Anechoic Room..... | 8 |
| 6.2 | Radiated emission at Open Field Test Site..... | 10 |
| 6.3 | Desensitization of pulsed Emissions | 11 |
| 7 | Photographs Taken During Testing | 12 |
| 8 | Test Results..... | 15 |
| 8.1 | Occupied Bandwidth..... | 16 |
| 8.2 | Designation of Emissions | 18 |
| 8.3 | Duty Cycle Measurement | 19 |
| 8.4 | Restricted bands of operation..... | 22 |
| 8.5 | Radiated Emission Measurement 30 MHz to 110 GHz | 23 |
| 9 | Referenced Regulations | 24 |
| 10 | Charts taken during testing | 26 |

1 Description of the Equipment Under Test (EUT)

| General data of EUT | |
|---------------------------------|--------------------------------|
| Type designation ¹ : | Solid Radar FMR 25x |
| Serial number(s): | 7C007901083 |
| Manufacturer: | Endress & Hauser GmbH & Co. KG |
| Type of equipment: | Level Measuring Transmitter |
| Version: | with Horn Antenna |
| FCC ID: | |
| Additional parts/accessories: | |

| Technical data of EUT | | | | | | | | | | | | | | | | | |
|---|--|------------------|--------|------------------|--------|------------------|----------|--------|----|-------------|--------|--------|----|-------------|--------|--------|-----|
| Application frequency range: | 24.00 – 24.12 GHz | | | | | | | | | | | | | | | | |
| Frequency range: | 24.00 – 24.12 GHz | | | | | | | | | | | | | | | | |
| Operating frequency: | 24.12 GHz (nominal) | | | | | | | | | | | | | | | | |
| Type of modulation: | 1G08P0NAN | | | | | | | | | | | | | | | | |
| Pulse train: | 558.5 ns | | | | | | | | | | | | | | | | |
| Pulse width: | 2.79 ns | | | | | | | | | | | | | | | | |
| Number of RF-channels: | 1 | | | | | | | | | | | | | | | | |
| Channel spacing: | Not Applicable | | | | | | | | | | | | | | | | |
| Designation of emissions ² : | 1G08P0NAN | | | | | | | | | | | | | | | | |
| Type of antenna: | Horn Antenna | | | | | | | | | | | | | | | | |
| Size/length of antenna: | <table border="1"> <thead> <tr> <th>Type</th> <th>Gain</th> <th>Length</th> <th>Tested</th> </tr> </thead> <tbody> <tr> <td>80 mm / 3"</td> <td>23.8 dBi</td> <td>211 mm</td> <td>No</td> </tr> <tr> <td>100 mm / 4"</td> <td>26 dBi</td> <td>282 mm</td> <td>No</td> </tr> <tr> <td>100 mm / 4"</td> <td>26 dBi</td> <td>430 mm</td> <td>Yes</td> </tr> </tbody> </table> | Type | Gain | Length | Tested | 80 mm / 3" | 23.8 dBi | 211 mm | No | 100 mm / 4" | 26 dBi | 282 mm | No | 100 mm / 4" | 26 dBi | 430 mm | Yes |
| Type | Gain | Length | Tested | | | | | | | | | | | | | | |
| 80 mm / 3" | 23.8 dBi | 211 mm | No | | | | | | | | | | | | | | |
| 100 mm / 4" | 26 dBi | 282 mm | No | | | | | | | | | | | | | | |
| 100 mm / 4" | 26 dBi | 430 mm | Yes | | | | | | | | | | | | | | |
| Statement: | All antennas are of the same type and the antenna with the highest gain has been tested: The antennas can be equipped with either DN 80 or DN flange which does not affect the antenna gain. | | | | | | | | | | | | | | | | |
| Type of power supply: | DC supply | | | | | | | | | | | | | | | | |
| Specifications for power supply: | <table> <tr> <td>nominal voltage:</td> <td>24 V</td> </tr> <tr> <td>minimum voltage:</td> <td>16 V</td> </tr> <tr> <td>maximum voltage:</td> <td>36 V</td> </tr> </table> | nominal voltage: | 24 V | minimum voltage: | 16 V | maximum voltage: | 36 V | | | | | | | | | | |
| nominal voltage: | 24 V | | | | | | | | | | | | | | | | |
| minimum voltage: | 16 V | | | | | | | | | | | | | | | | |
| maximum voltage: | 36 V | | | | | | | | | | | | | | | | |

¹ Type designation of the system if EUT consists of more than one part.

² Also known as "Class of Emission".

2 Administrative Data

| Application details | |
|---------------------------|--|
| Applicant (full address): | Endress & Hauser GmbH & Co. KG Hauptstraße 1 D 79689 Maulburg Germany |
| Contact person: | Mr. Peter Klöfer |
| Contract identification: | |
| Receipt of EUT: | January 2006 |
| Date(s) of test: | February – March 2006 |
| Note(s): | |

| Report details | |
|----------------|---------------|
| Report number: | 50511-40907-4 |
| Edition: | 1 |
| Issue date: | 22 March 2006 |

3 Identification of the Test Laboratory

| Details of the Test Laboratory | |
|---|--|
| Company name: | Senton GmbH EMI/EMC Test Center |
| Address: | Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany |
| Laboratory Accreditation: | DAR-Registration No. DAT-P-171/94-02 |
| FCC Test Site registration number | 90926 |
| Industry Canada Test site registration: | IC 3050 |
| Contact person: | Mr. Johann Roidt |
| | Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99 |

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207 and 15.209

of the Federal Communication Commission (FCC)

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:

Mr. Johann Roidt

Responsible for test report:

Mr. Johann Roidt

5 Operation Mode and Configuration of EUT

Operation Mode

Normal operation mode: Measurement with pulsed signal.

Configuration of EUT

FCC test setup.
 DC 24 V power supply.
 EUT in vertical position.

List of ports and cables

| <i>Port</i> | <i>Description</i> | <i>Classification³</i> | <i>Cable type</i> | <i>Cable length</i> |
|-------------|-----------------------------------|-----------------------------------|-------------------|---------------------|
| 1 | DC supply with HART communication | dc power signal/control port | Shielded | > 3 m |

List of devices connected to EUT

| <i>Item</i> | <i>Description</i> | <i>Type Designation</i> | <i>Serial no. or ID</i> | <i>Manufacturer</i> |
|-------------|--------------------|-------------------------|-------------------------|---------------------|
| --- | | | | |

List of support devices


| <i>Item</i> | <i>Description</i> | <i>Type Designation</i> | <i>Serial no. or ID</i> | <i>Manufacturer</i> |
|-------------|--------------------|-------------------------|-------------------------|---------------------|
| --- | | | | |

³ Ports shall be classified as ac power, dc power or signal/control port

6 Measuring Methods

6.1 Radiated emission in Fully Anechoic Room

| Measurement Procedure: | |
|--|--------------------------------|
| Rules and Specifications: | CFR 47 Part 15, section 15.209 |
| Guide: | ANSI C63.4 |
| <p>Radiated emission in fully anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully anechoic room are indicated as prescans.</p> | |

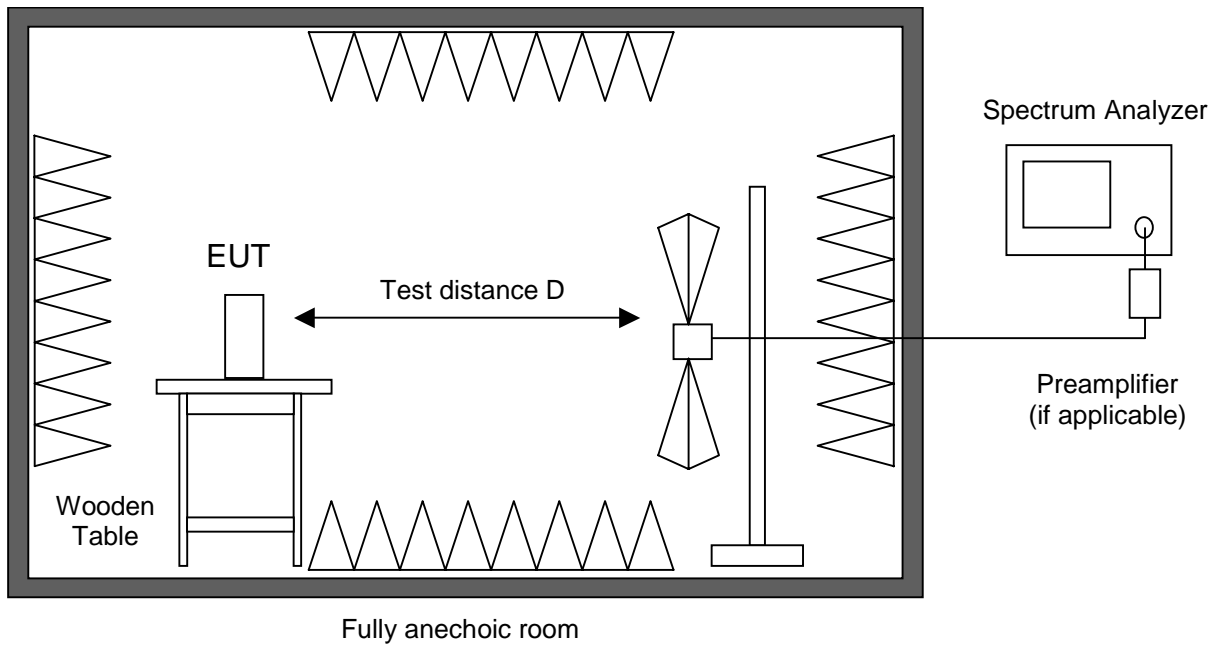

Test instruments used:

| Used | Type | Model | Serial No. or ID | Manufacturer |
|-------------------------------------|--------------------------|----------------------|--------------------------|--------------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer | FSP 30 | 100063 | Rohde & Schwarz |
| <input type="checkbox"/> | EMI test receiver | ESMI | 839379/013 839587/006 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Preamplifier | CPA9231A | 3393 | Schaffner |
| <input checked="" type="checkbox"/> | Preamplifier 1-8 GHz | AFS3-00100800-32-LN | 847743 | Miteq |
| <input type="checkbox"/> | Preamplifier 0.5-8 GHz | AMF-4D-005080-25-13P | 860149 | Miteq |
| <input checked="" type="checkbox"/> | Preamplifier 8-18 GHz | ACO/180-3530 | 32641 | CTT |
| <input checked="" type="checkbox"/> | External Mixer | WM782A | 845881/005 | Tektronix |
| <input checked="" type="checkbox"/> | Harmonic Mixer | FS-Z30 | 843389/007 | Rohde & Schwarz |
| | Accessories | | | |
| <input checked="" type="checkbox"/> | Trilog broadband antenna | VULB 9163 | 9163-188 | Schwarzbeck |
| <input checked="" type="checkbox"/> | Horn antenna | 3115 | 9508-4553 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-03 | 9112-1003 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-04 | 9112-1001 | EMCO |
| <input checked="" type="checkbox"/> | Horn antenna | 3160-05 | 9112-1001 | EMCO |
| <input checked="" type="checkbox"/> | Horn antenna | 3160-06 | 9112-1001 | EMCO |
| <input checked="" type="checkbox"/> | Horn antenna | 3160-07 | 9112-1008 | EMCO |
| <input checked="" type="checkbox"/> | Horn antenna | 3160-08 | 9112-1002 | EMCO |
| <input checked="" type="checkbox"/> | Horn antenna | 3160-09 | 9403-1025 | EMCO |
| <input checked="" type="checkbox"/> | Horn antenna | 3160-10 | 399185 | EMCO |
| <input checked="" type="checkbox"/> | Fully anechoic room | No. 2 | 1452 | Albatross Projects |

6.2 Radiated emission at Open Field Test Site

Measurement Procedure:

Rules and Specifications: CFR 47 Part 15, section 15.209


Guide: ANSI C63.4

Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.

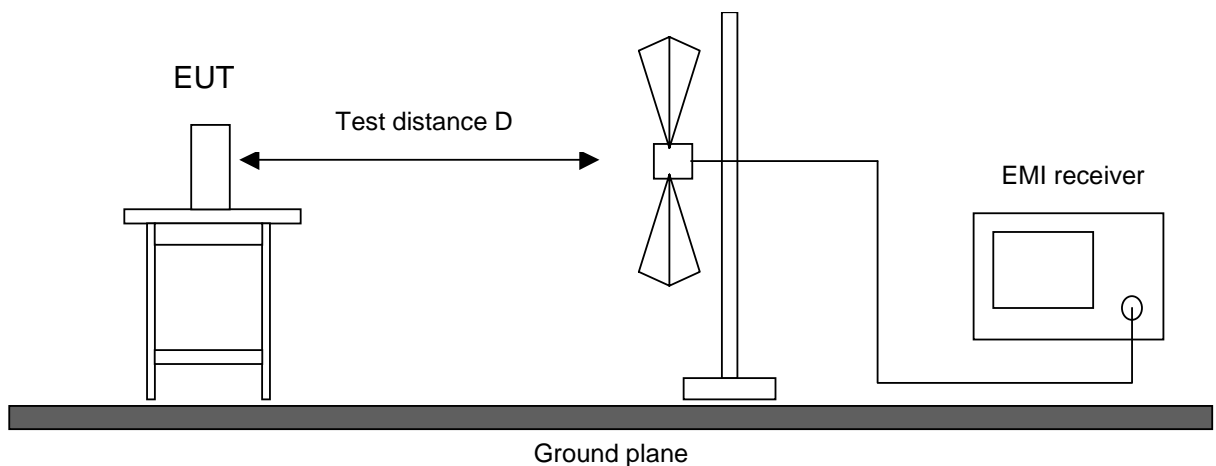

Test instruments used:

| Used | Type | Model | Serial No. or ID | Manufacturer |
|--------------------------|----------------------|-------------|------------------|-----------------|
| <input type="checkbox"/> | EMI receiver | ESVP | 881414/009 | Rohde & Schwarz |
| <input type="checkbox"/> | Biconical antenna | EG 1 HK 116 | 842204/001 | Rohde & Schwarz |
| <input type="checkbox"/> | Log. per. antenna | EG 1 HL 223 | 841516/023 | Rohde & Schwarz |
| <input type="checkbox"/> | Open field test site | EG 1 | 1450 | Senton |

6.3 Desensitization of pulsed Emissions

Since the EUT transmits pulsed energy, the desensitization factor α has been calculated and included in the calculation for the final peak value.

In the HP Application Note 150-2 the analyzer settings to measure a line spectrum are defined as follows:

- a) Bandwidth $B < 0.3 \times \text{PRF}$
- b) Scan time $T_s > F_s / B^2$

With the pulse repetition frequency (PRF) of the EUT of 3.6 MHz and the selected measuring bandwidth of $B = 1$ MHz the requirement a) was observed.

The scan width of $F_s = 3$ GHz and Bandwidth of $B = 1$ MHz leads to following values:

$$F_s/B^2 = 3 \text{ GHz} / (1 \text{ GHz})^2 = 3 \times 10^{-9} \text{ s}$$

The selected scan time of $T_s = 20$ ms meets requirement b). Hence, a line spectrum was measured, which could be seen, when the Pseudo-Noise-mode of the EUT was switched off (no influence on the measured amplitudes) and the frequency scale of the analyser zoomed.

The desensitization factor α_l was calculated according to HP Application note 150-2:

$$\alpha_l = 20 \log (\tau_{\text{eff}} / T) = - 46 \text{ dB}$$

The calculation based on the pulse width $\tau_{\text{eff}} = 2.79$ ns and the pulse period $T = 558.5$ ns, which have been supplied by the applicant.

To avoid overloading the spectrum analyzer the internal preselector has been activated during final testing. A linearity check by adding a 3 dB attenuator to the input was used to ensure integrity of the test data.

Sample Calculation of Field Strength values for pulsed systems:


- 1) Measure Peak value with analyzer RBW set to 1 MHz, VBW set to 1 MHz, T_s set to 20 ms
- 2) Calculate Field Strength by adding antenna correction factor
- 3) Calculate True Peak Field Strength by adding Desensitization Factor
- 4) Calculate Average value by subtracting Duty Cycle Correction Factor from True Peak Field Strength Value

7 Photographs Taken During Testing

**Test setup for radiated emission measurement
(fully anechoic room)**



**Test setup for radiated emission measurement
(fully anechoic room) - continued -**

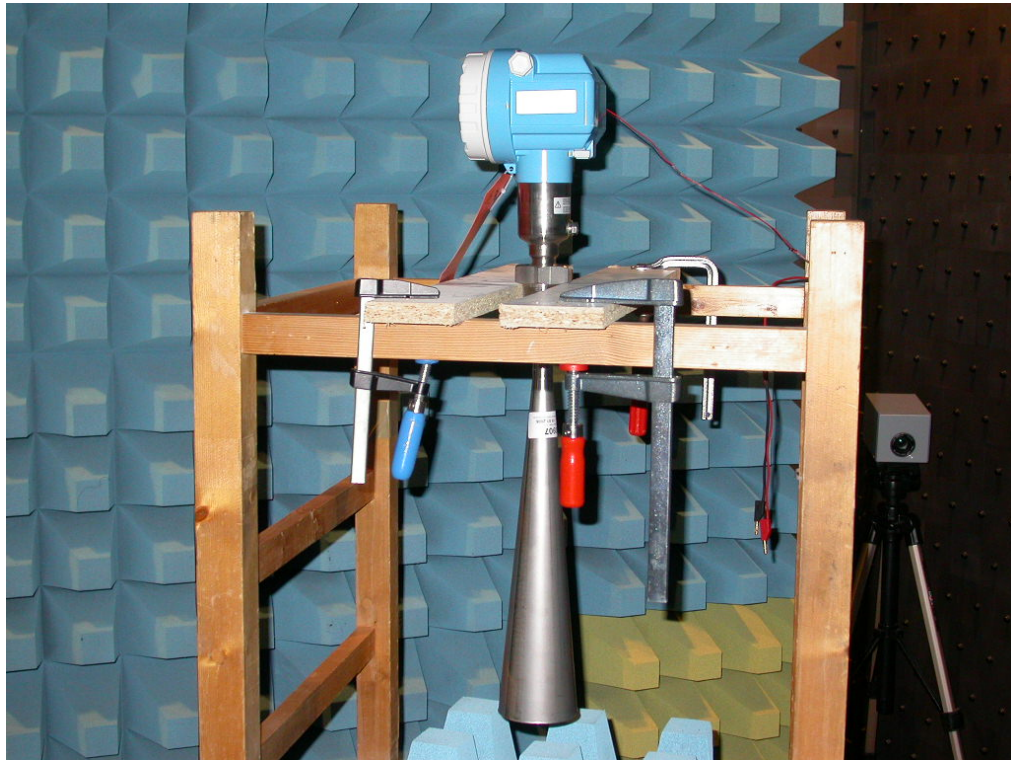

8 Test Results

| FCC CFR 47 Parts 2 and 15 | | | |
|----------------------------------|--|-------------|---|
| <i>Section(s)</i> | <i>Test</i> | <i>Page</i> | <i>Result</i> |
| 2.202(a) | Occupied bandwidth | 16 | Recorded |
| 2.201, 2.202 | Class of emission | 18 | Calculated |
| 15.35(c) | Pulse train measurement for pulsed operation | 19 | Recorded |
| 15.205(a) | Restricted bands of operation | 22 | Test passed |
| 15.207 | Conducted AC powerline emission 150 kHz to 30 MHz | | See test report 50511-40907-2 ⁴ |
| 15.205(b) 15.209 | Radiated emission 9 kHz to 30 MHz | --- | See test report 50511-40907-2 |
| 15.205(b) 15.209 | Radiated emission 30 MHz to 110 GHz | 23 | Test passed |

⁴ Conducted AC powerline emission not applicable. Conducted DC powerline emission performed instead.


8.1 Occupied Bandwidth

| | | |
|--|--|------------------------------|
| Rules and specifications: | CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6 | |
| Guide: | ANSI C63.4 | |
| Description: | <p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p> | |
| | Fundamental frequency | Minimum resolution bandwidth |
| | 9 kHz to 30 MHz | 1 kHz |
| | 30 MHz to 1000 MHz | 10 kHz |
| | 1000 MHz to 40 GHz | 100 kHz |
| The video bandwidth shall be at least three times greater than the resolution bandwidth. | | |
| Comment: | Test performed up to 26.5 GHz only | |
| Date of test: | 11 March 2005 | |
| Test site: | Fully anechoic room, cabin no. 2 | |

Occupied Bandwidth (-26 dB):

Ref.Level 47 dB μ V
5 dB/Div.

ATT 0 dB

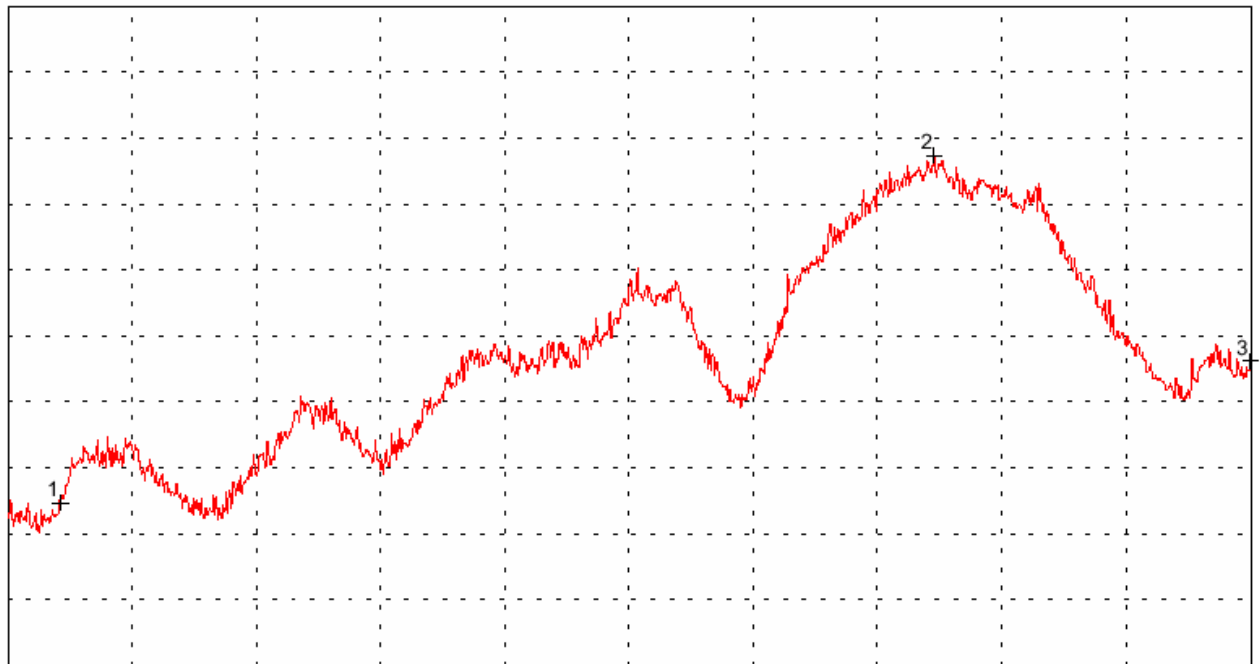

Start 23.28611111 GHz
RBW 100 kHz

VBW 1 MHz

Stop 26.500 GHz
SWP 980 ms

Occupied Bandwidth (-26 dB): **> 3.0 GHz**

8.2 Designation of Emissions

| | |
|---------------------------|---|
| Rules and specifications: | CFR 47 Part 2, sections 2.201 and 2.202 |
| Guide: | ANSI C63.4 / TRC-43 |

| | |
|---------------------|----------------------------|
| Type of modulation: | Unmodulated Pulse Emission |
|---------------------|----------------------------|

| | |
|---|---|
| B_n = Necessary Bandwidth | $B_n = 2 K / t$ |
| K = Overall numerical factor | $K = 1.5$ |
| t = Pulse duration in seconds at half-amplitude | $t = 2.79\text{ns}$ |
| Calculation: | $B_n = 2 \cdot 1.5 / 2.79\text{ns} = 1.075 \text{ GHz}$ |


| | |
|---------------------------|------------------|
| Designation of Emissions: | 1G08P0NAN |
|---------------------------|------------------|

8.3 Duty Cycle Measurement


| | |
|---------------------------|----------------------------------|
| Rules and specifications: | CFR 47 Part 15, section 15.35(c) |
| Guide: | ANSI C63.4 |


| | |
|---------------|---|
| Comment: | Measurement with negative diode detector. |
| Date of test: | 8 March 2005 |
| Test site: | Fully anechoic room, cabin no. 2 |

Total Pulse Train:

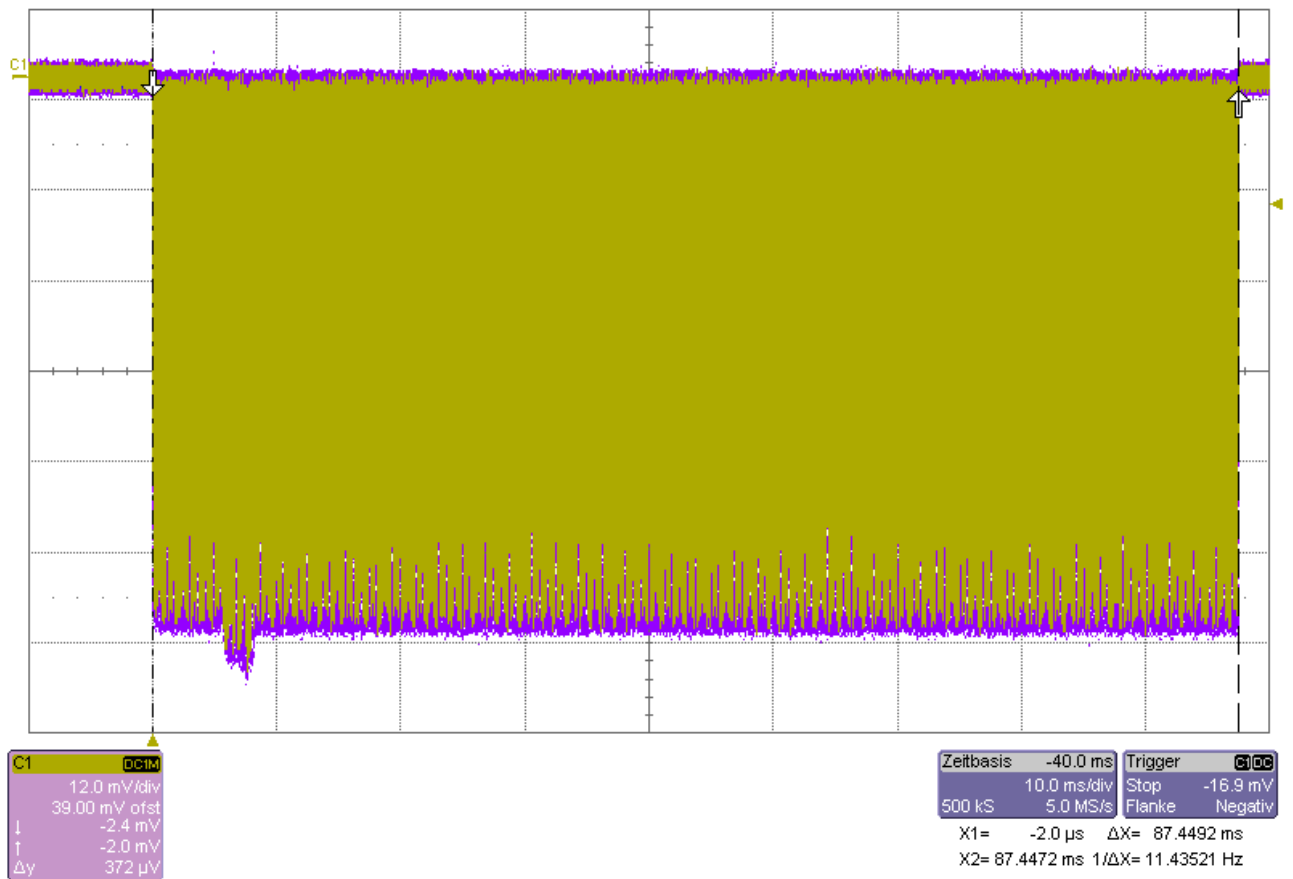

Worst case:

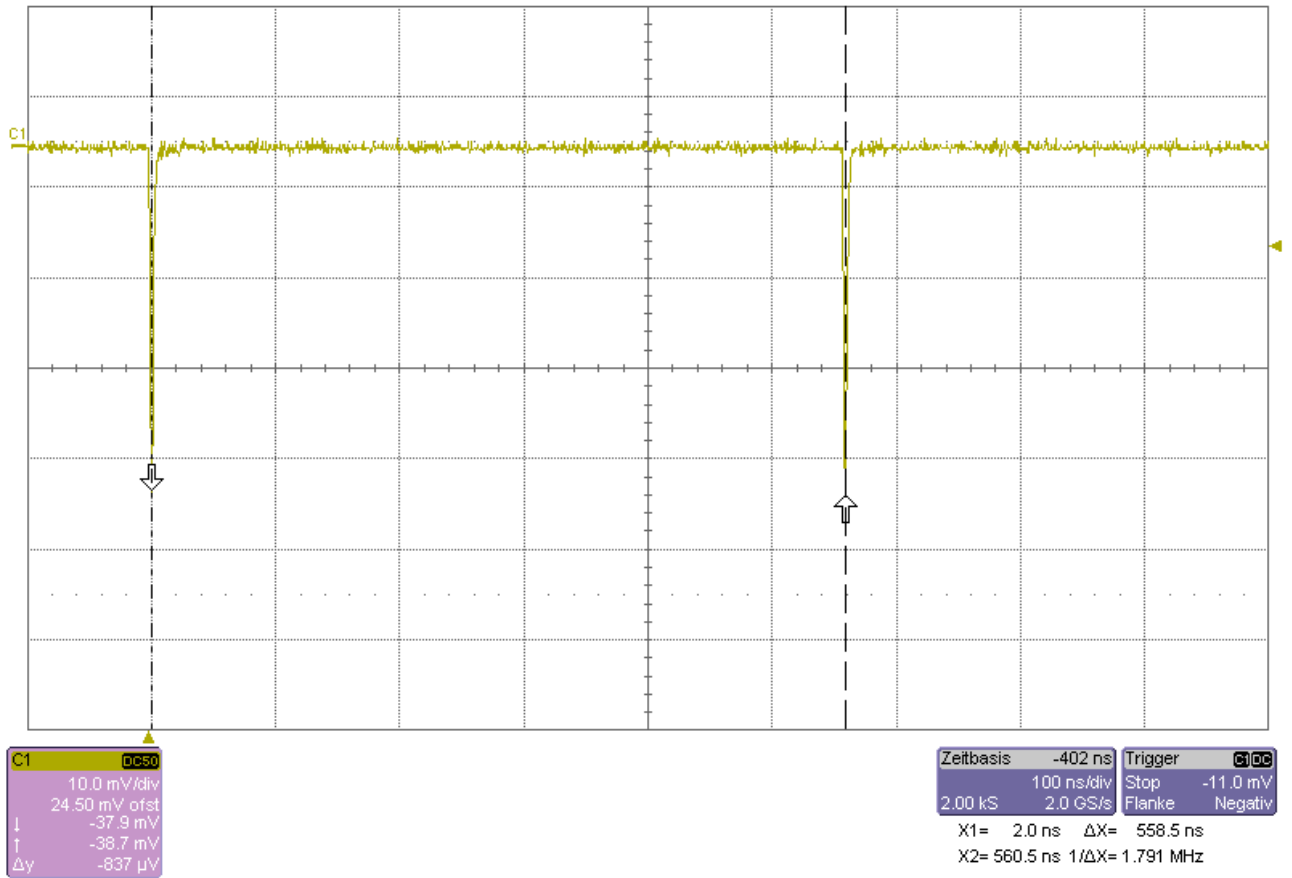

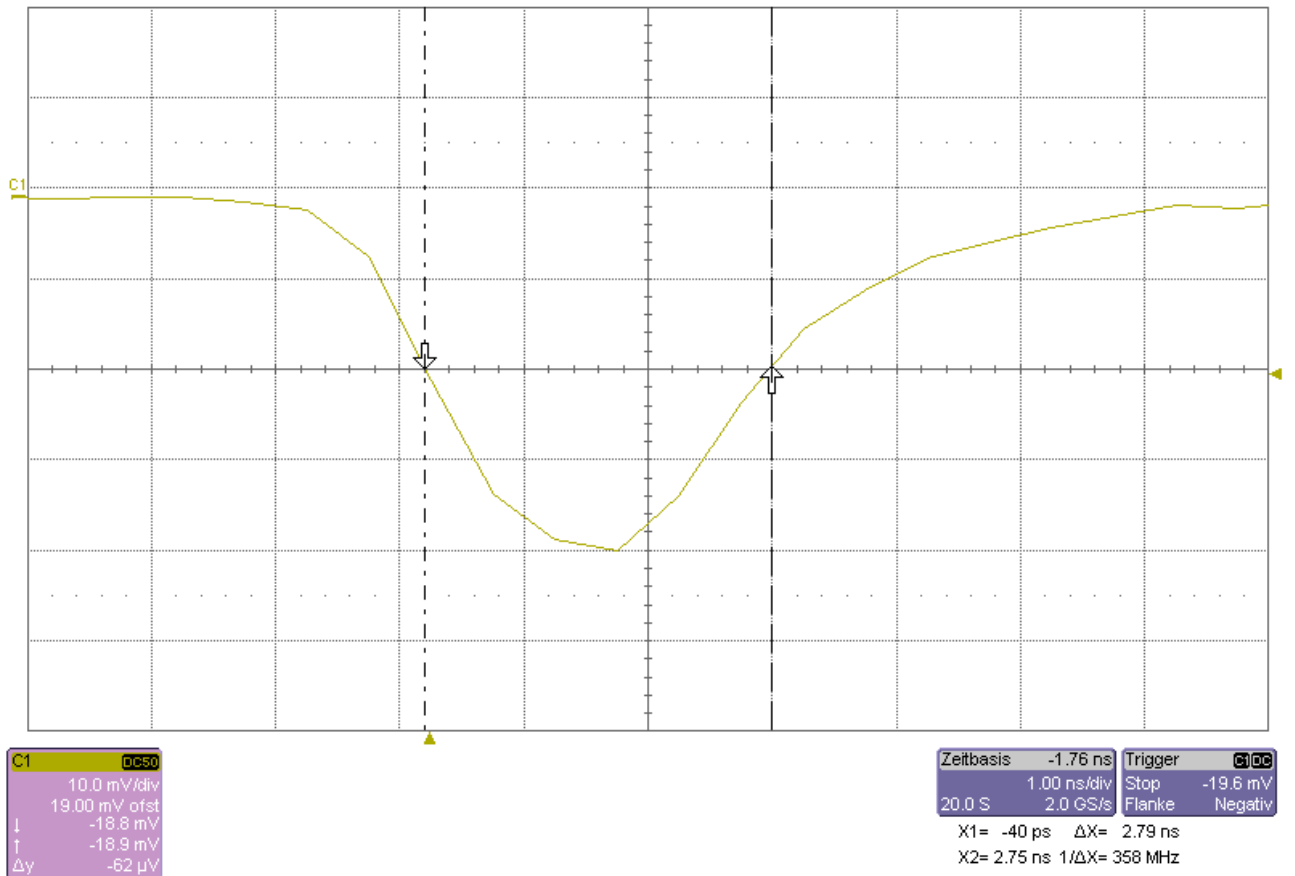


Calculation of Duty cycle correction:

| | | | |
|--------------------------|--------------|---|---|
| TX-On-Time (worst case): | T_{on} | = | 2.79 ns |
| Pulse Train Time: | T_{pt} | = | 558.5 ns |
| Mod Time: | T_{period} | = | 558.5 ns |
| Pulse Train Correction: | C_{pt} | = | $20 \cdot \text{Log}(T_{on} / T_{period})$ dB |
| | | = | -46.0 dB |

8.4 Restricted bands of operation

| | |
|---------------------------|---|
| Rules and specifications: | CFR 47 Part 15, section 15.205(a) |
| Guide: | ANSI C63.4 |
| Limit: | Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) |

| | |
|----------------|----------------------------------|
| Comment: | |
| Date of test: | |
| Test site: | Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters |

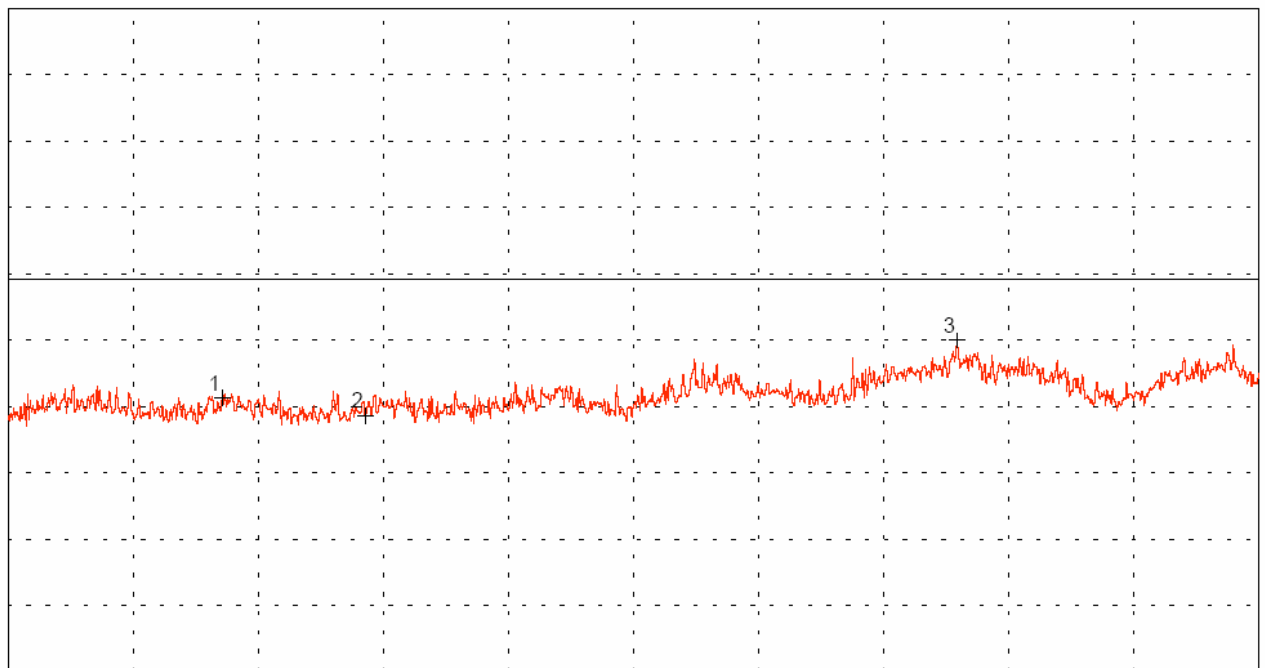

Start 23.000 GHz
 RBW 1 MHz

VBW 1 MHz

Stop 26.500 GHz
 SWP 20 ms

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

8.5 Radiated Emission Measurement 30 MHz to 110 GHz

| | | | |
|---------------------------|--------------------------------|---|--|
| Rules and specifications: | CFR 47 Part 15, section 15.209 | | |
| Guide: | ANSI C63.4 | | |
| Limit: | Frequency of Emission (MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Field Strength ($\text{dB}\mu\text{V}/\text{m}$) |
| | 30 - 88 | 100 | 40.0 |
| | 88 - 216 | 150 | 43.5 |
| | 216 - 960 | 200 | 46.0 |
| | Above 960 | 500 | 54.0 |

| | |
|----------------|---|
| Comment: | |
| Date of test: | |
| Test site: | Frequencies ≤ 1 GHz: Open field test site Frequencies > 1 GHz: Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| Frequency (MHz) | Polarization | Detector | Reading ($\text{dB}\mu\text{V}$) | Correction (dB/m) | Pulse Train Corr. (dB) | Final Value ($\text{dB}\mu\text{V}/\text{m}$) | Limit ($\text{dB}\mu\text{V}/\text{m}$) | Margin (dB) |
|-----------------|--------------|----------|------------------------------------|-------------------------------------|------------------------|---|---|-------------|
| 26390.000 | horizontal | Peak | 6.0 | 43.0 | 0.0 | 49.0 | 54.0 | 5.0 |

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

- | | | | |
|-------------------------------------|----------------|---|--|
| <input checked="" type="checkbox"/> | CFR 47 Part 2 | Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC) | October 10, 2004 |
| <input checked="" type="checkbox"/> | CFR 47 Part 15 | Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC) | September 19, 2005 |
| <input checked="" type="checkbox"/> | ANSI C63.4 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | December 11, 2003 (published on January 30, 2004) |
| <input checked="" type="checkbox"/> | CISPR 22 | Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement" | 1997 |

Page intentionally left blank

10 Charts taken during testing


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|---------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Horizontal Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

| |
|---|
| Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards) |
|---|

| |
|-------------------|
| Detector: Peak |
|-------------------|

| | |
|---------------------------------|--------------|
| List of values: 10 dB Margin | 50 Subranges |
|---------------------------------|--------------|

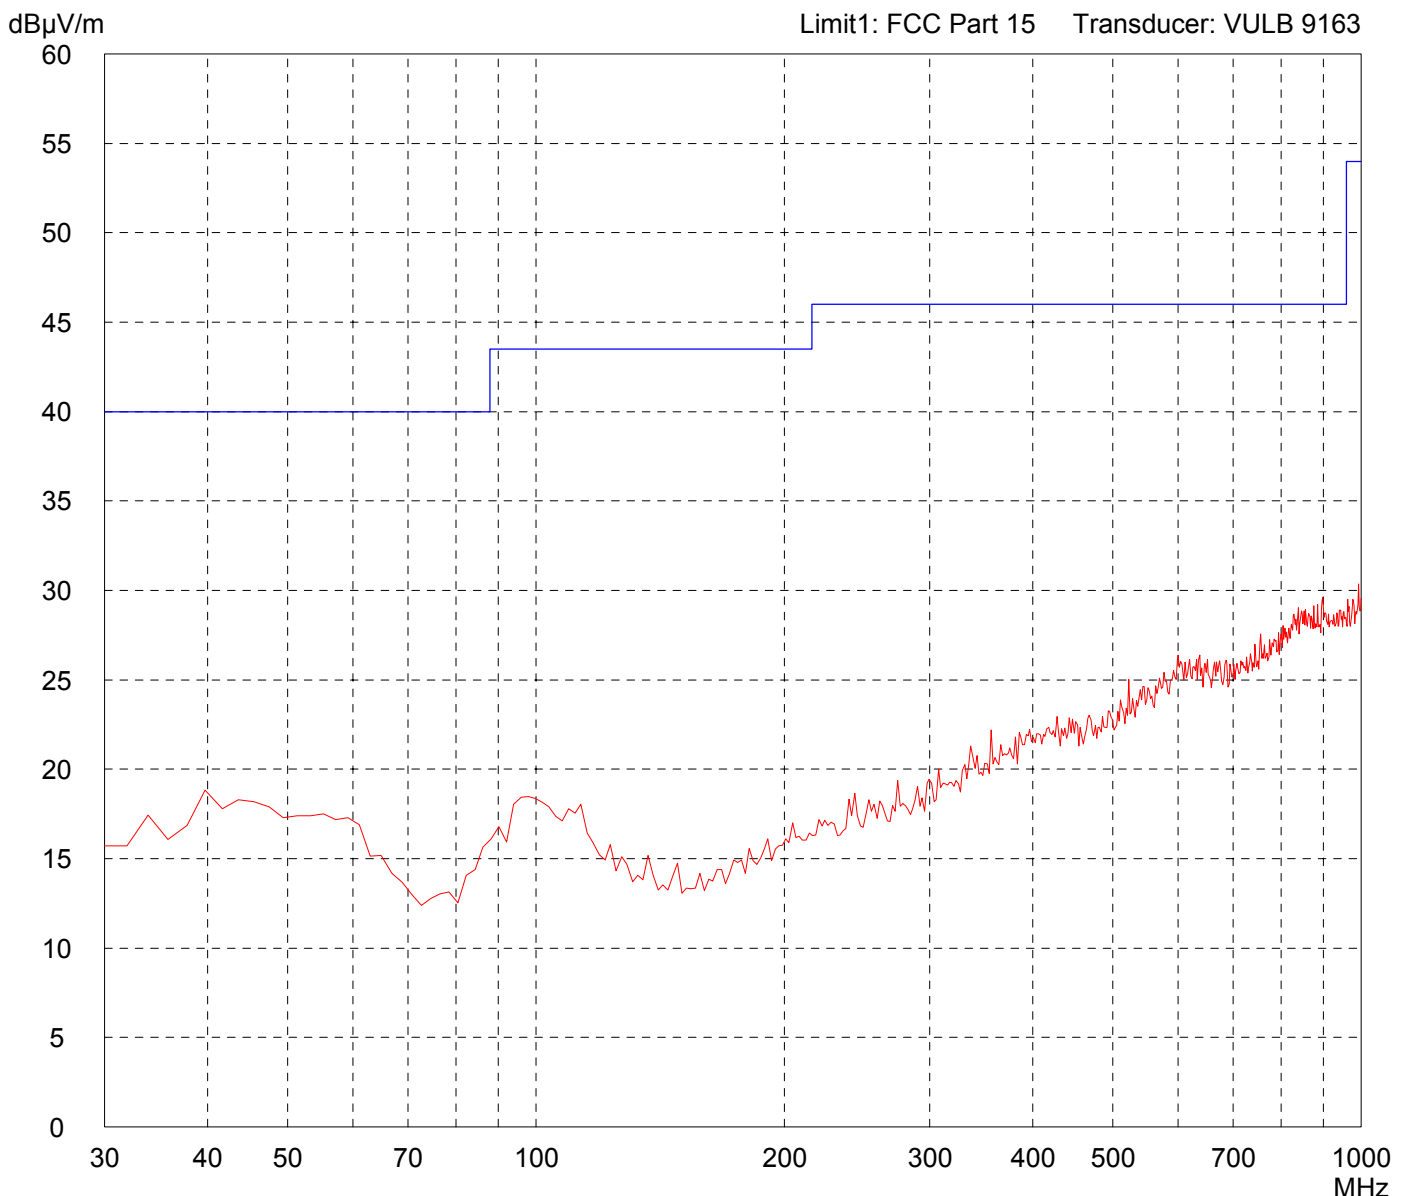

| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50511-40907-3 | Page 27 of 45 Pages |
|--------------------------------|---------------------|


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|----------------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Vertical Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
10 dB Margin **50 Subranges**

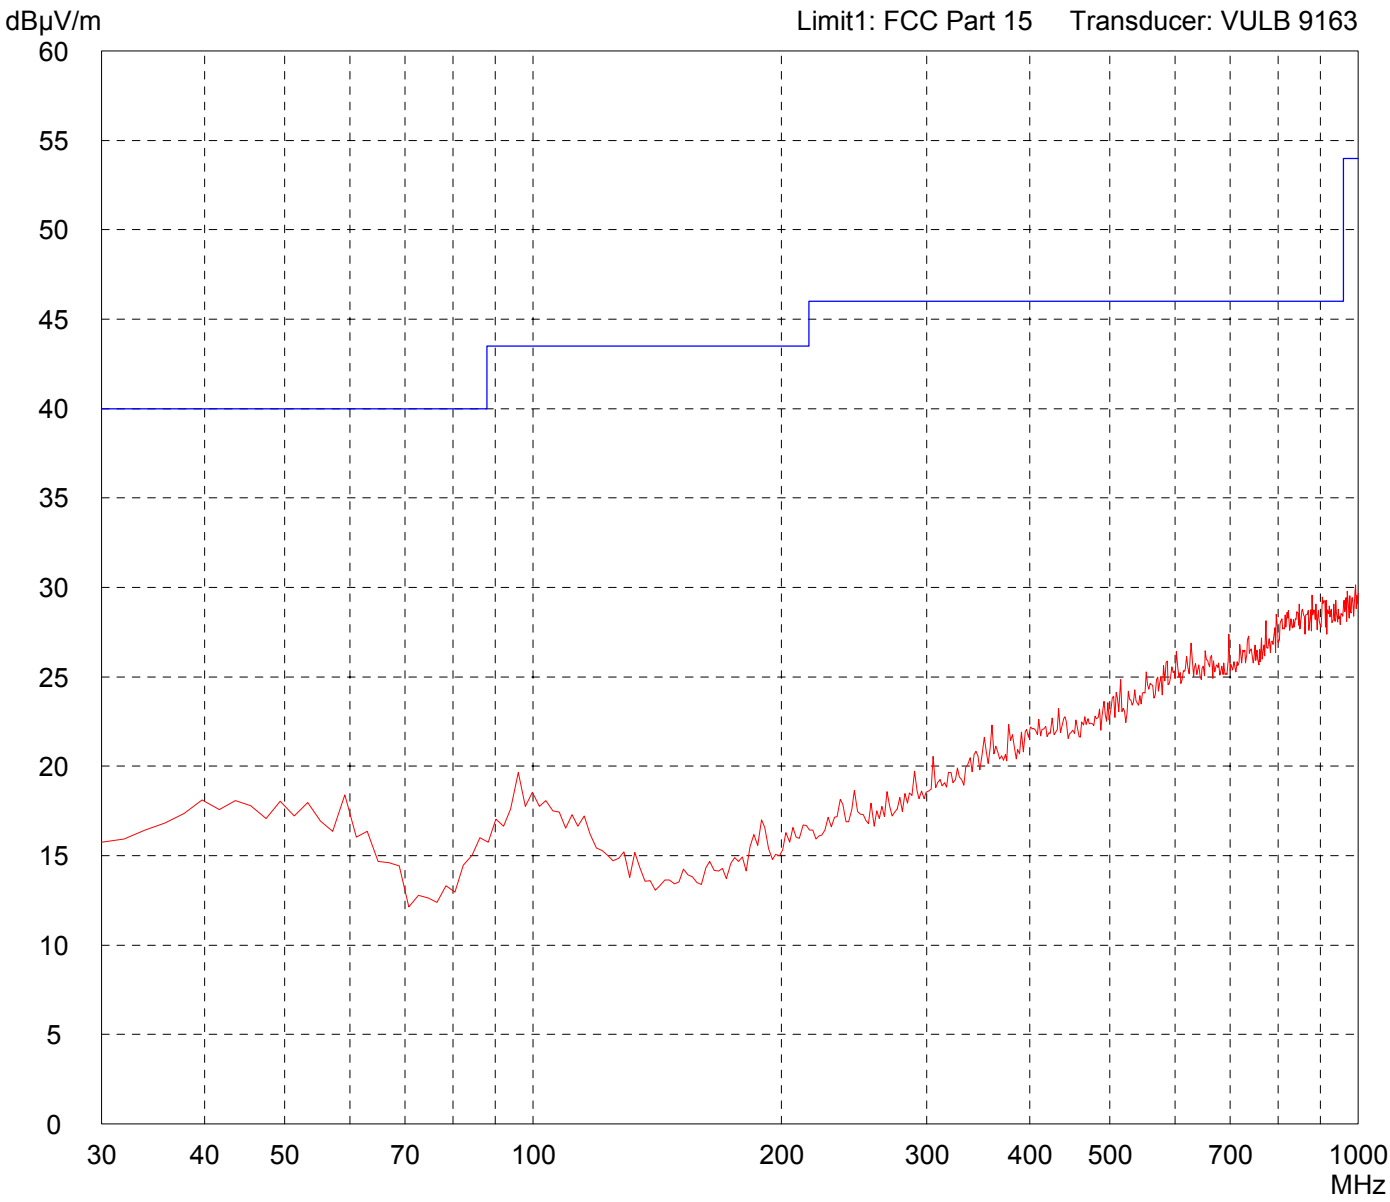

Result:
Prescan

Project file:
50511-40907-3 **Page 28 of 45 Pages**


Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|---------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Horizontal Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

| |
|---|
| Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards) |
|---|

| |
|-------------------|
| Detector: Peak |
|-------------------|

| |
|-------------------------------------|
| List of values: Selected by hand |
|-------------------------------------|

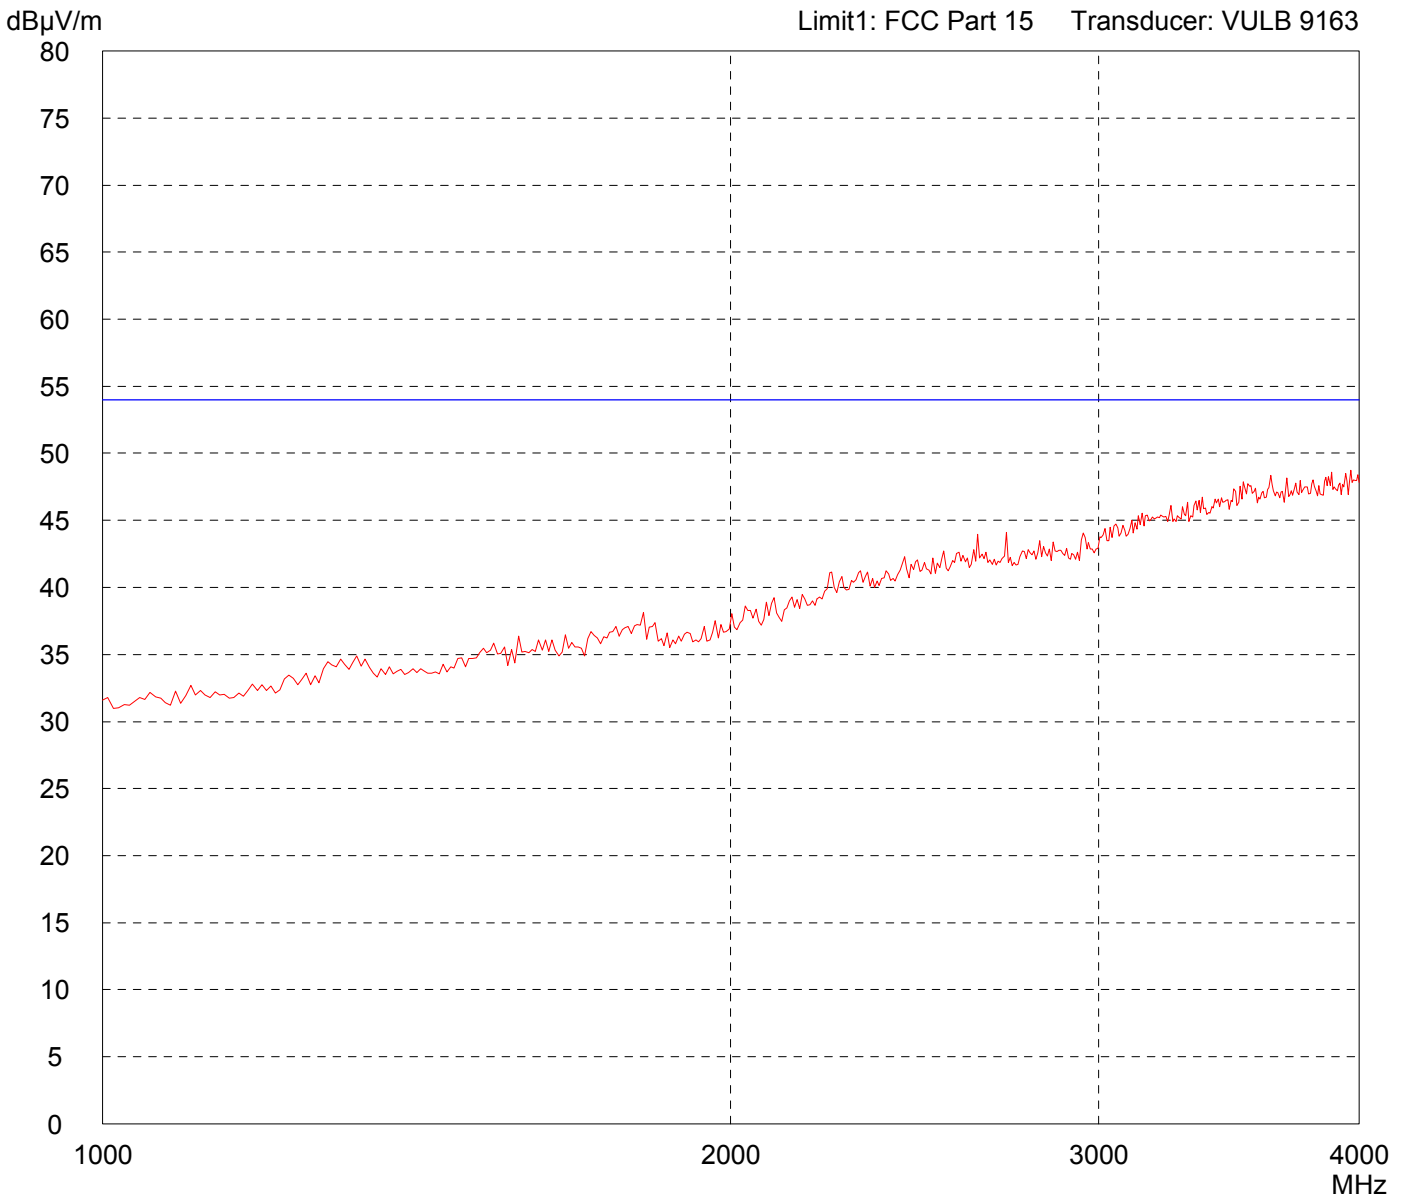

| |
|-----------------------|
| Result: Limit kept |
|-----------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50511-40907-3 | Page 29 of 45 Pages |
|--------------------------------|---------------------|


Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|----------------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Vertical Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
Selected by hand

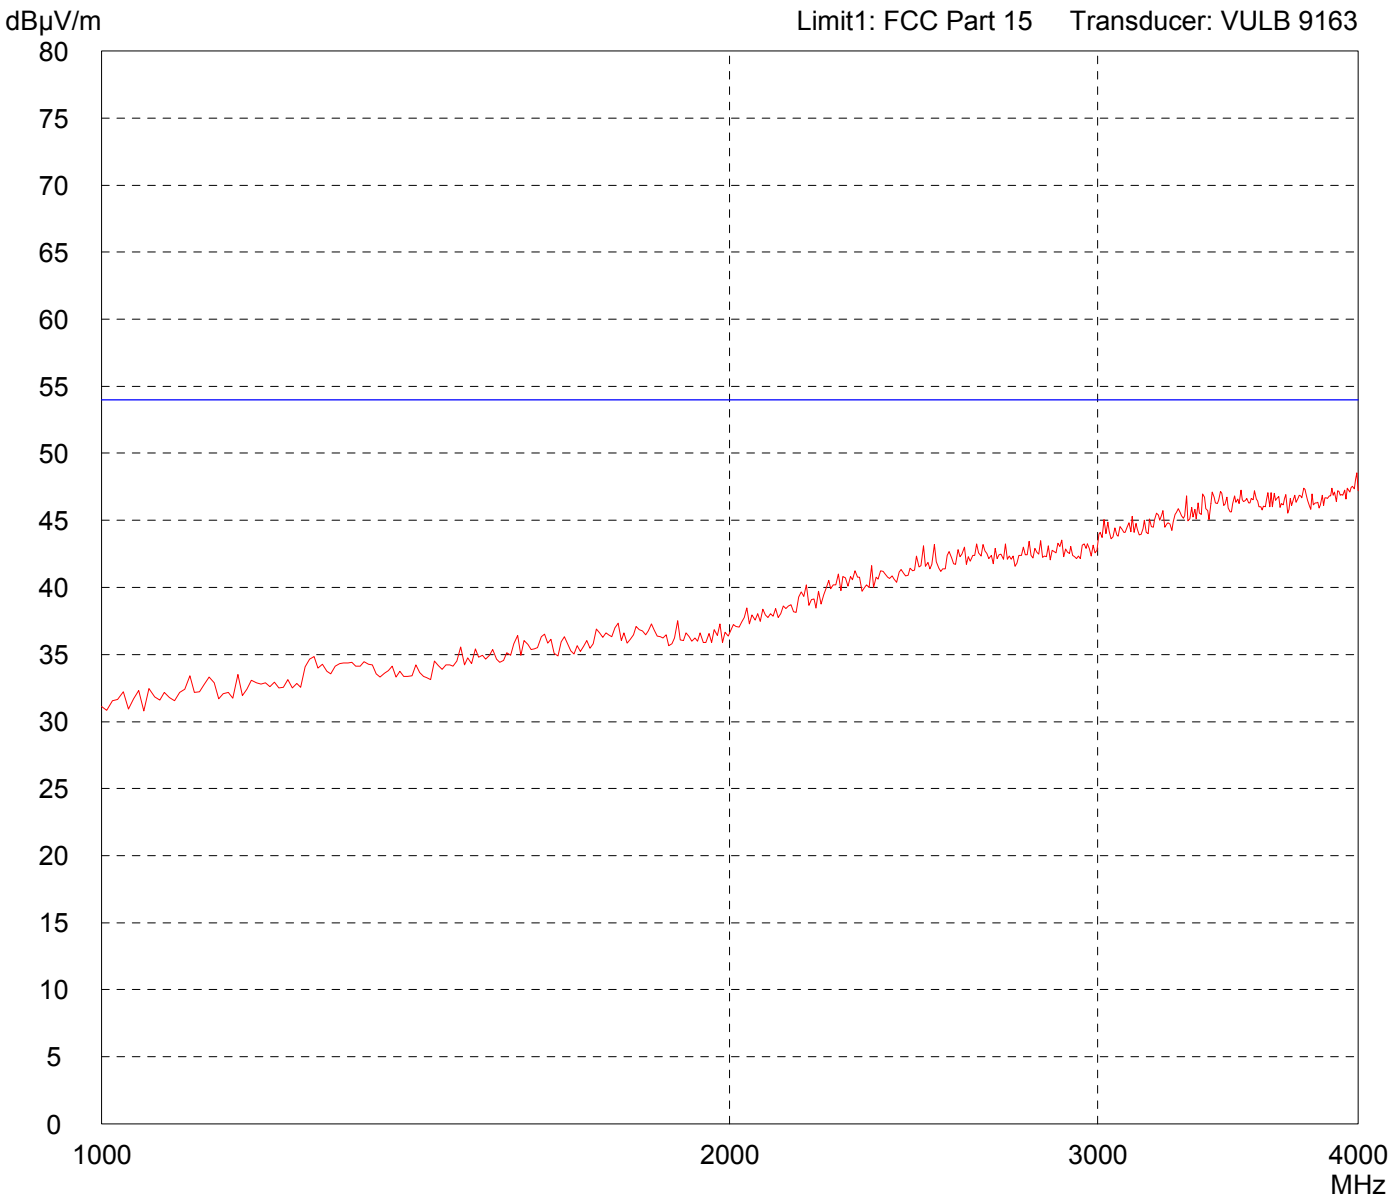

Result:
Limit kept

Project file:
50511-40907-3

Page 30 of 45 Pages


Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|----------------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Horizontal Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
10 dB Margin **50 Subranges**

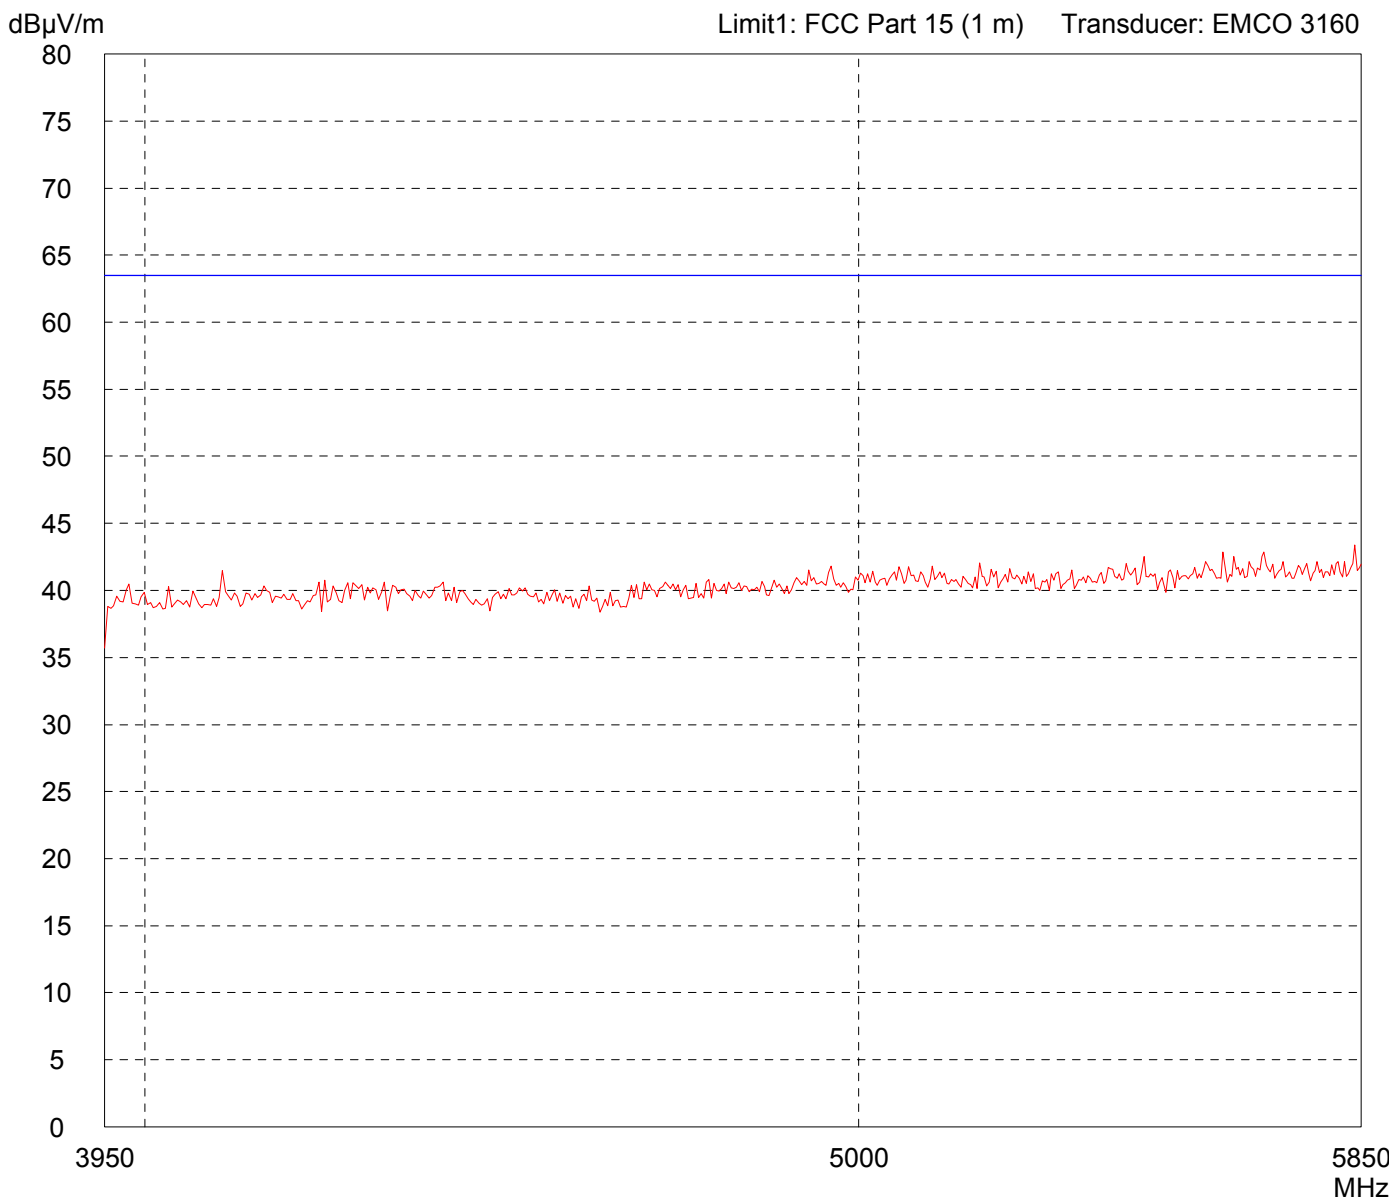

Result:
Limit kept

Project file:
50511-40907-3 **Page 31 of 45 Pages**


Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|----------------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Vertical Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
10 dB Margin **50 Subranges**

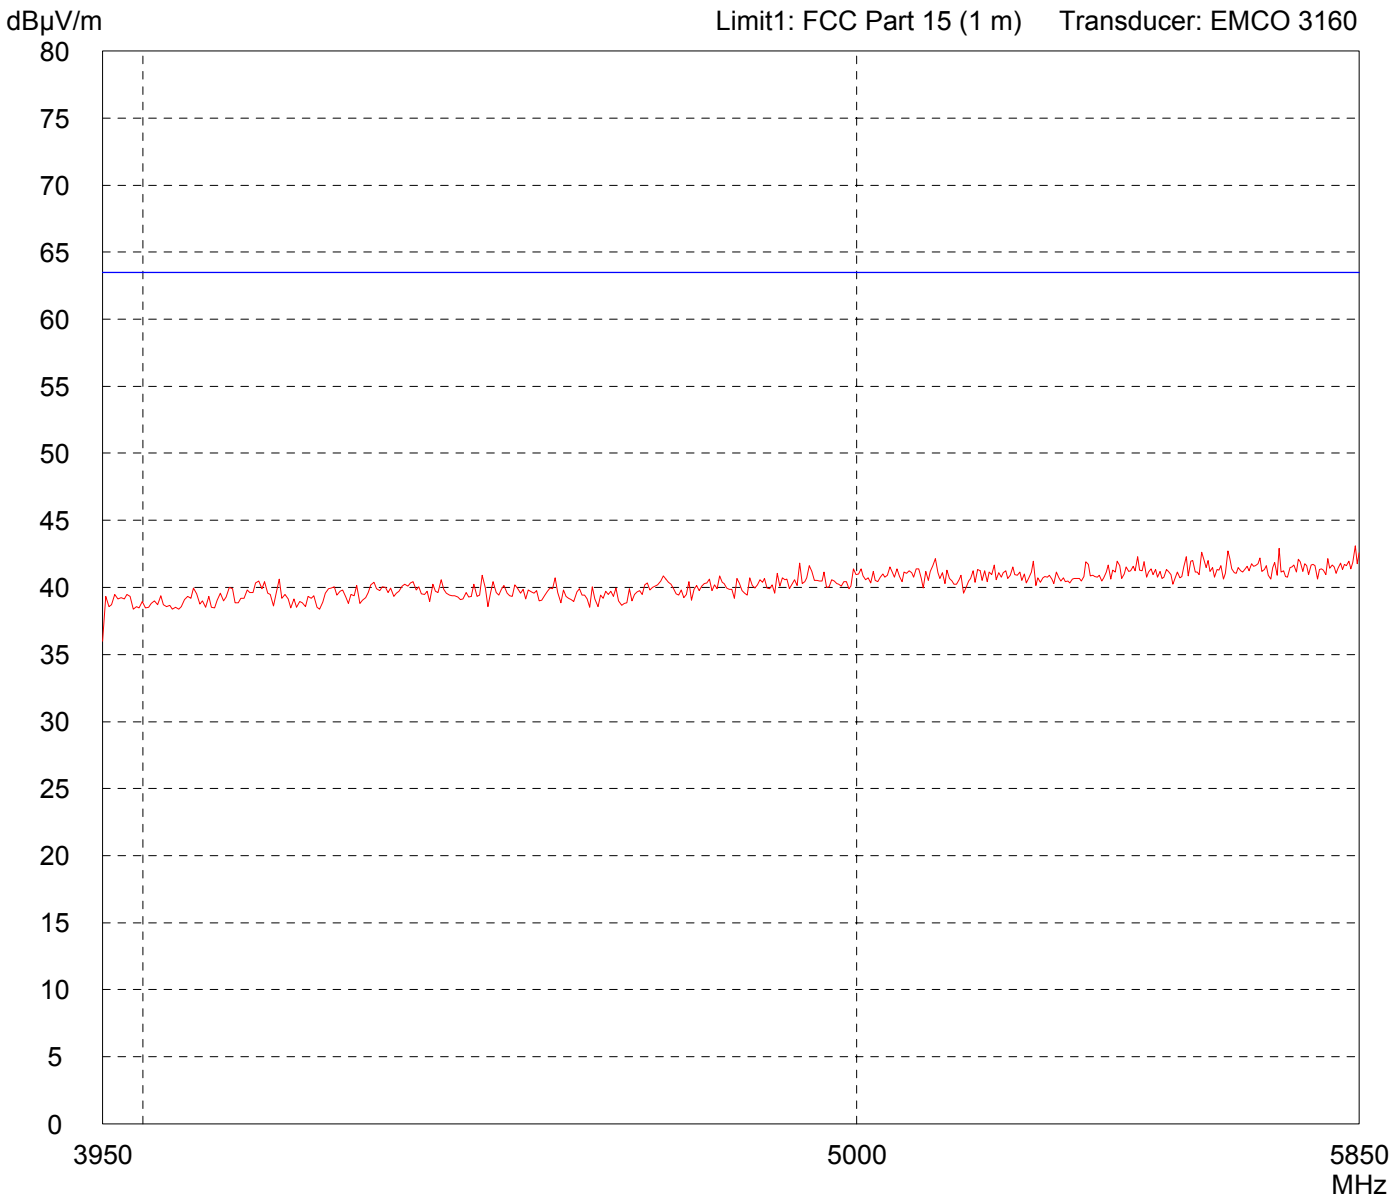

Result:
Limit kept

Project file:
50511-40907-3 **Page 32 of 45 Pages**


Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|----------------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Horizontal Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
10 dB Margin **50 Subranges**

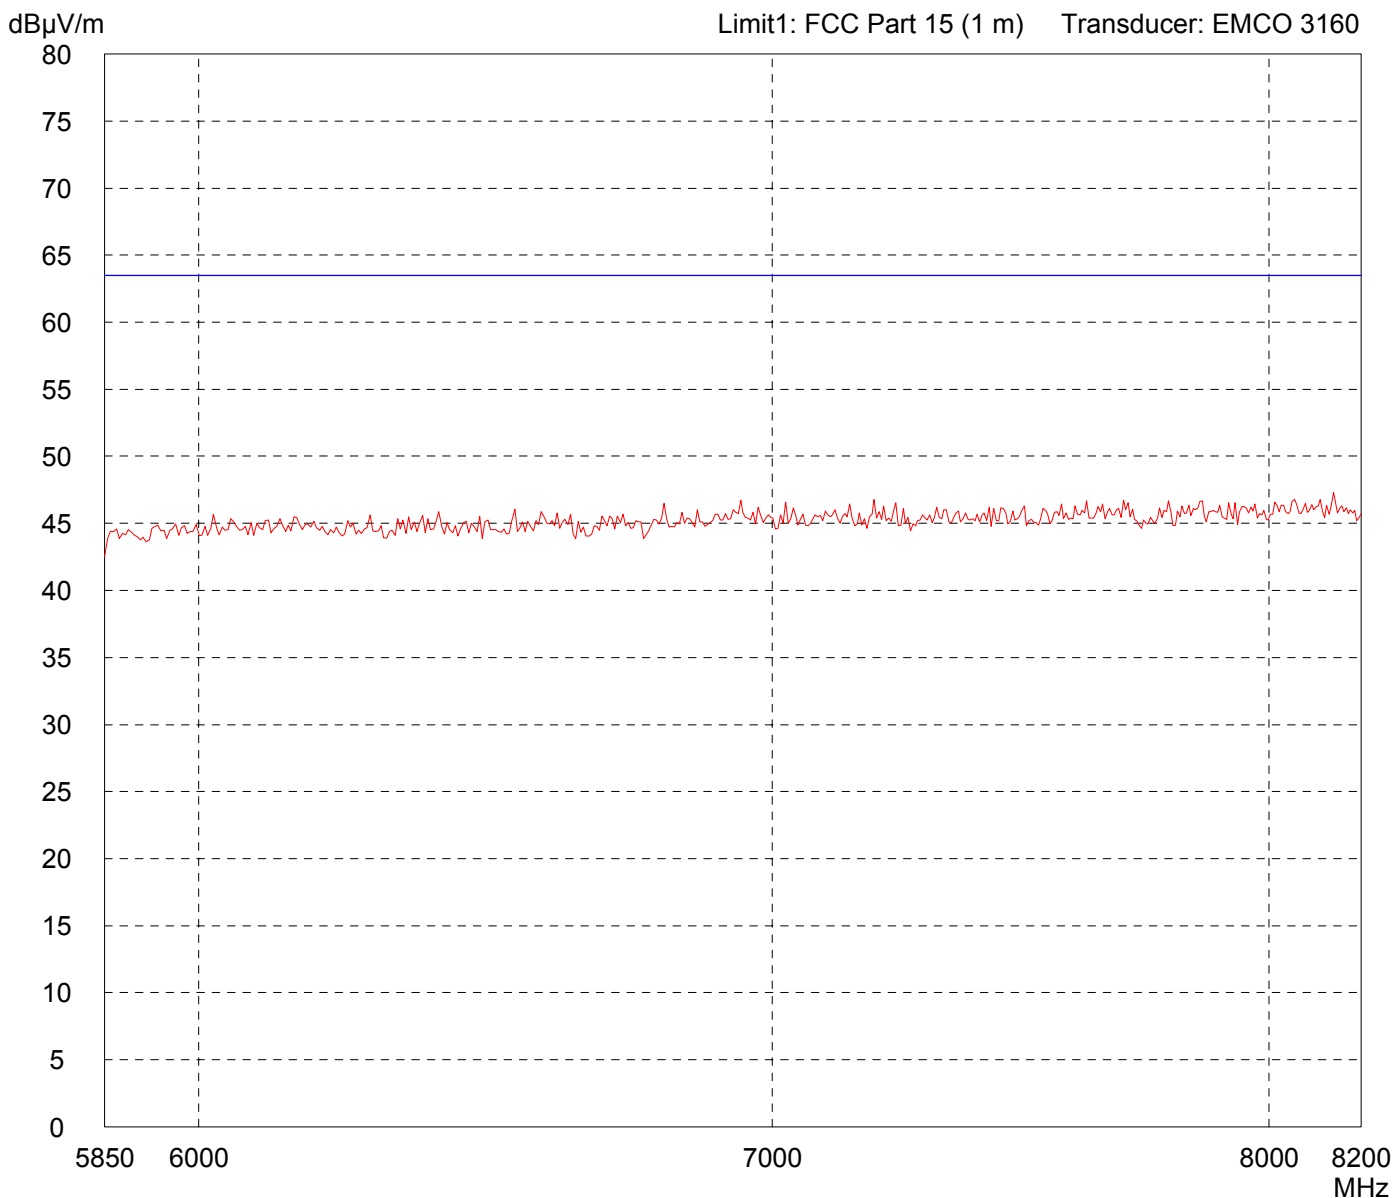

Result:
Limit kept

Project file:
50511-40907-3 **Page 33 of 45 Pages**


Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|----------------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Vertical Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
10 dB Margin **50 Subranges**

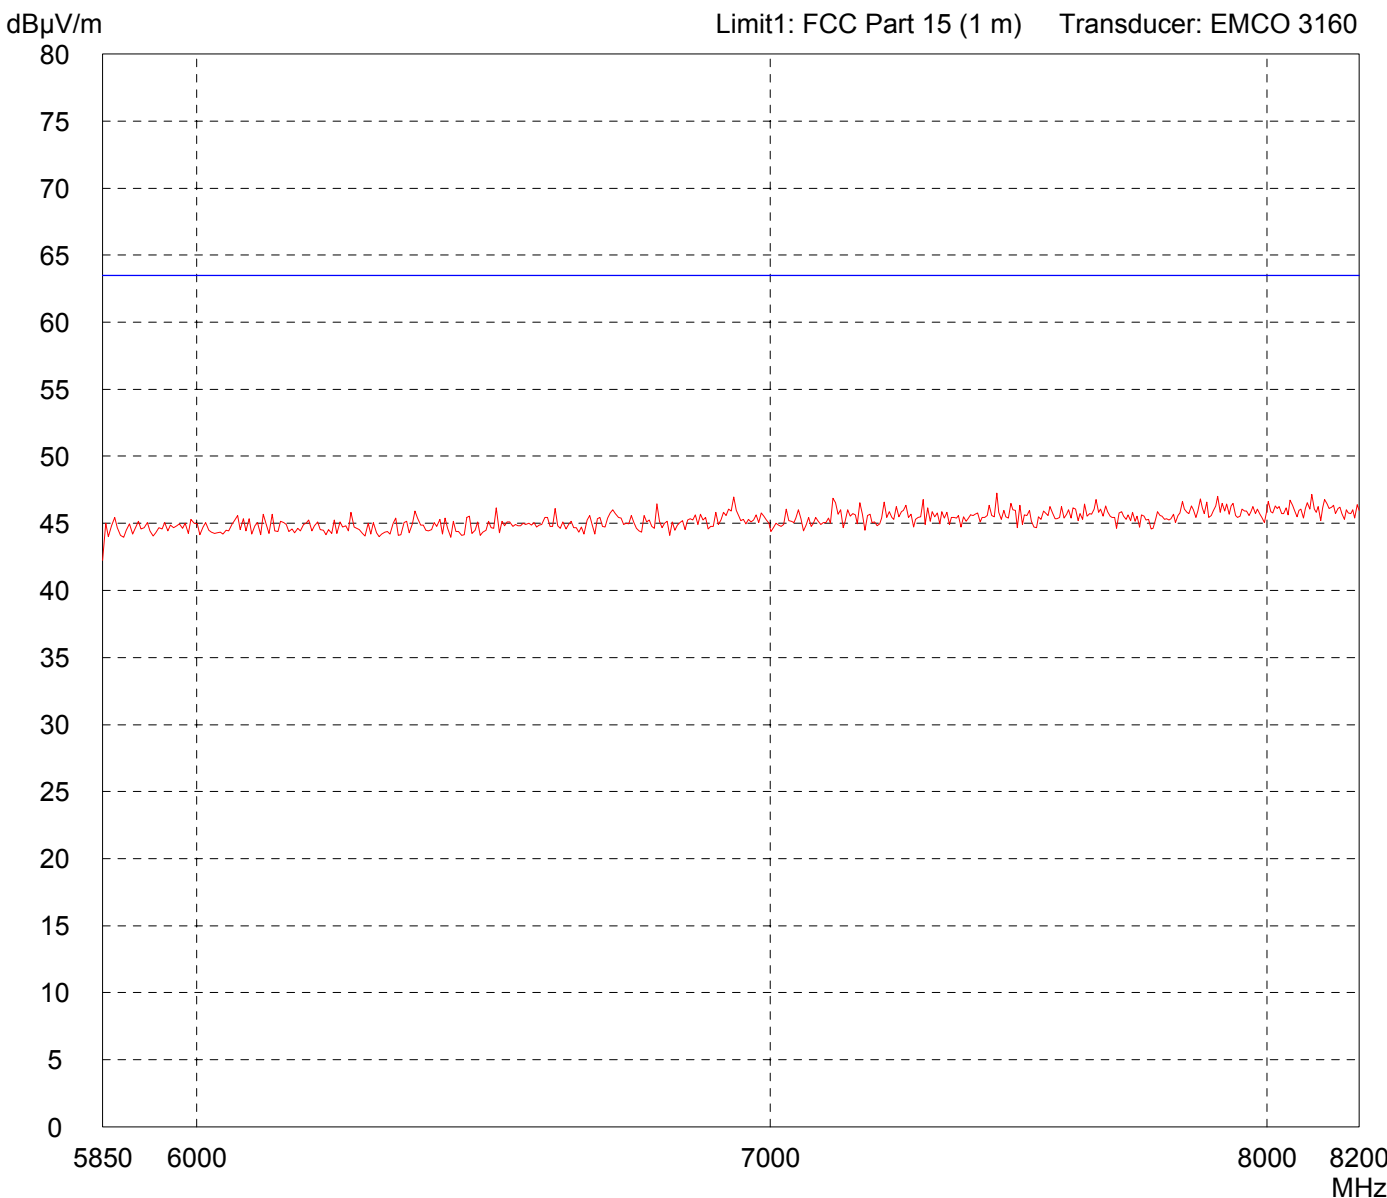

Result:
Limit kept

Project file:
50511-40907-3 **Page 34 of 45 Pages**


Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|---------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Horizontal Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
Selected by hand

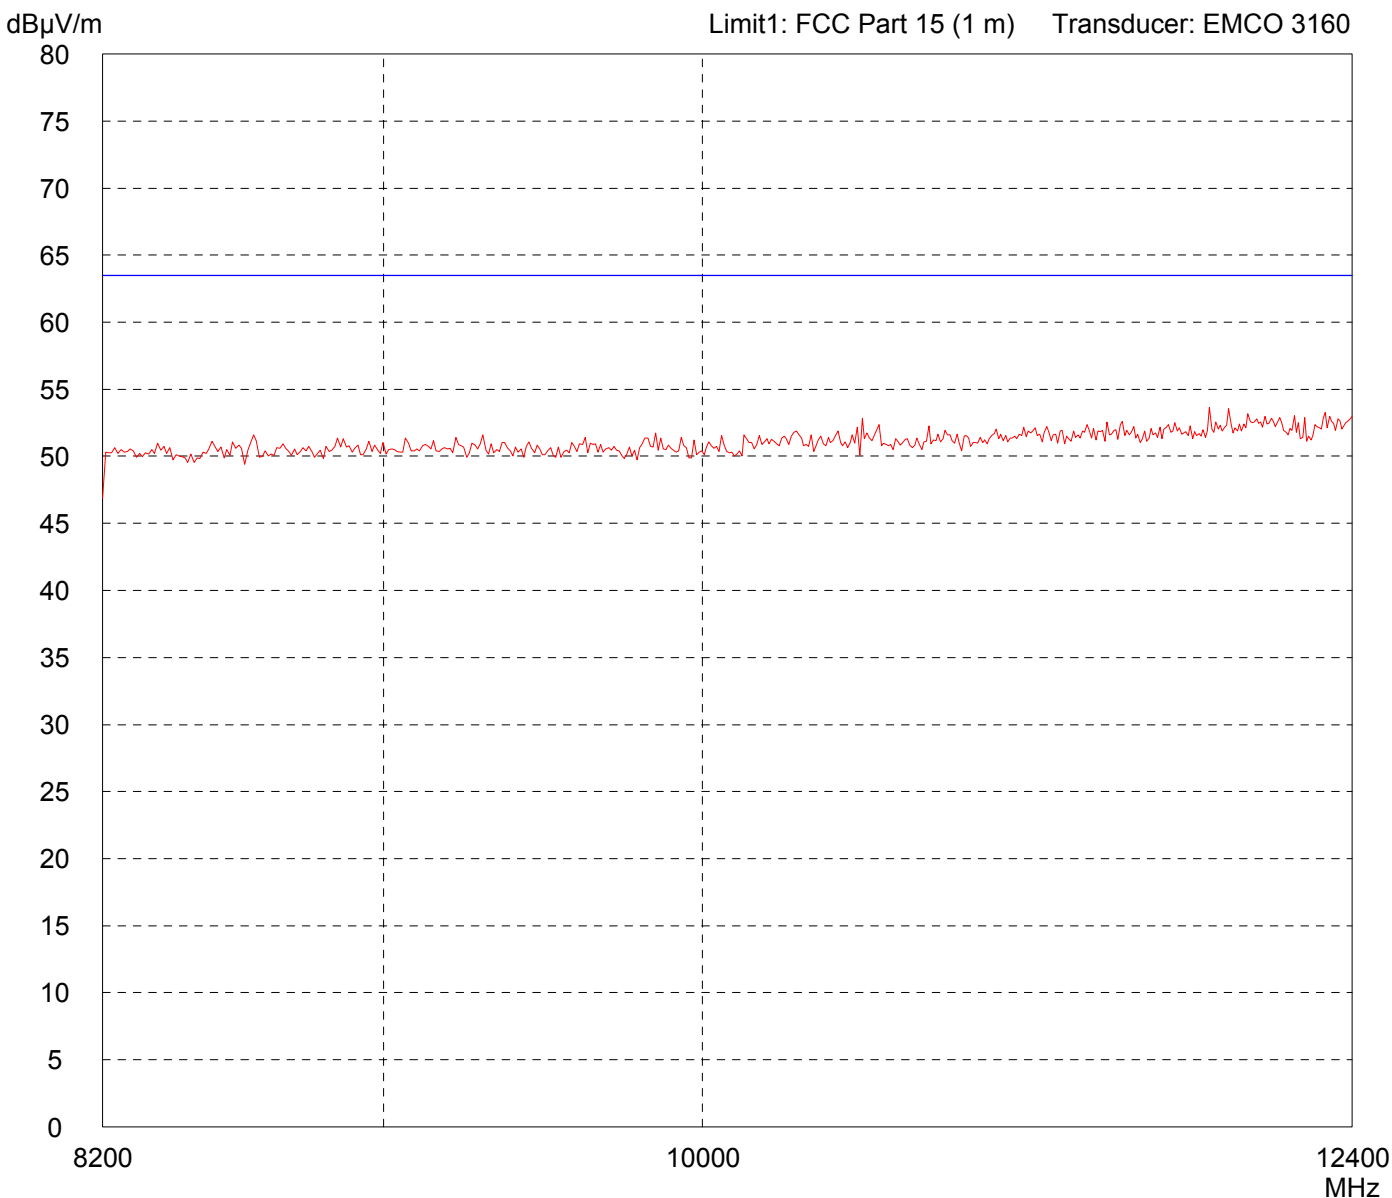

Result:
Limit kept

Project file:
50511-40907-3

Page 35 of 45 Pages


Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|---------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Vertical Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
Selected by hand

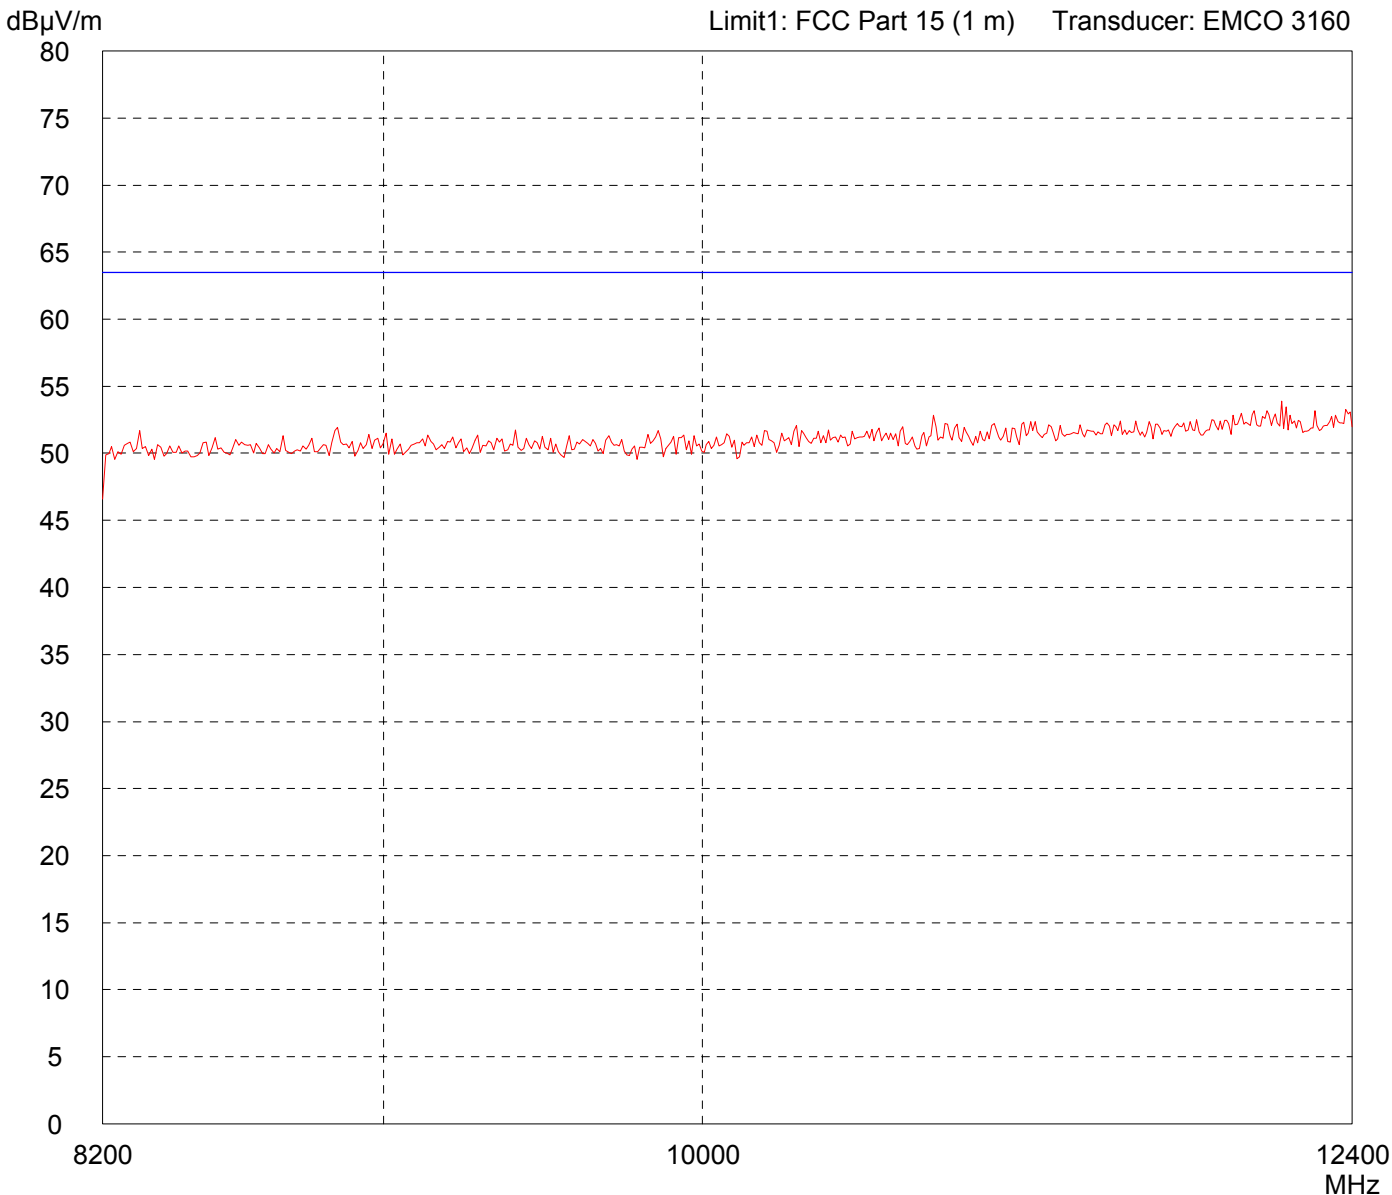

Result:
Limit kept

Project file:
50511-40907-3

Page 36 of 45 Pages


Radiated Emission Test 12.4 GHz - 18 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|---------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Horizontal Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
Selected by hand

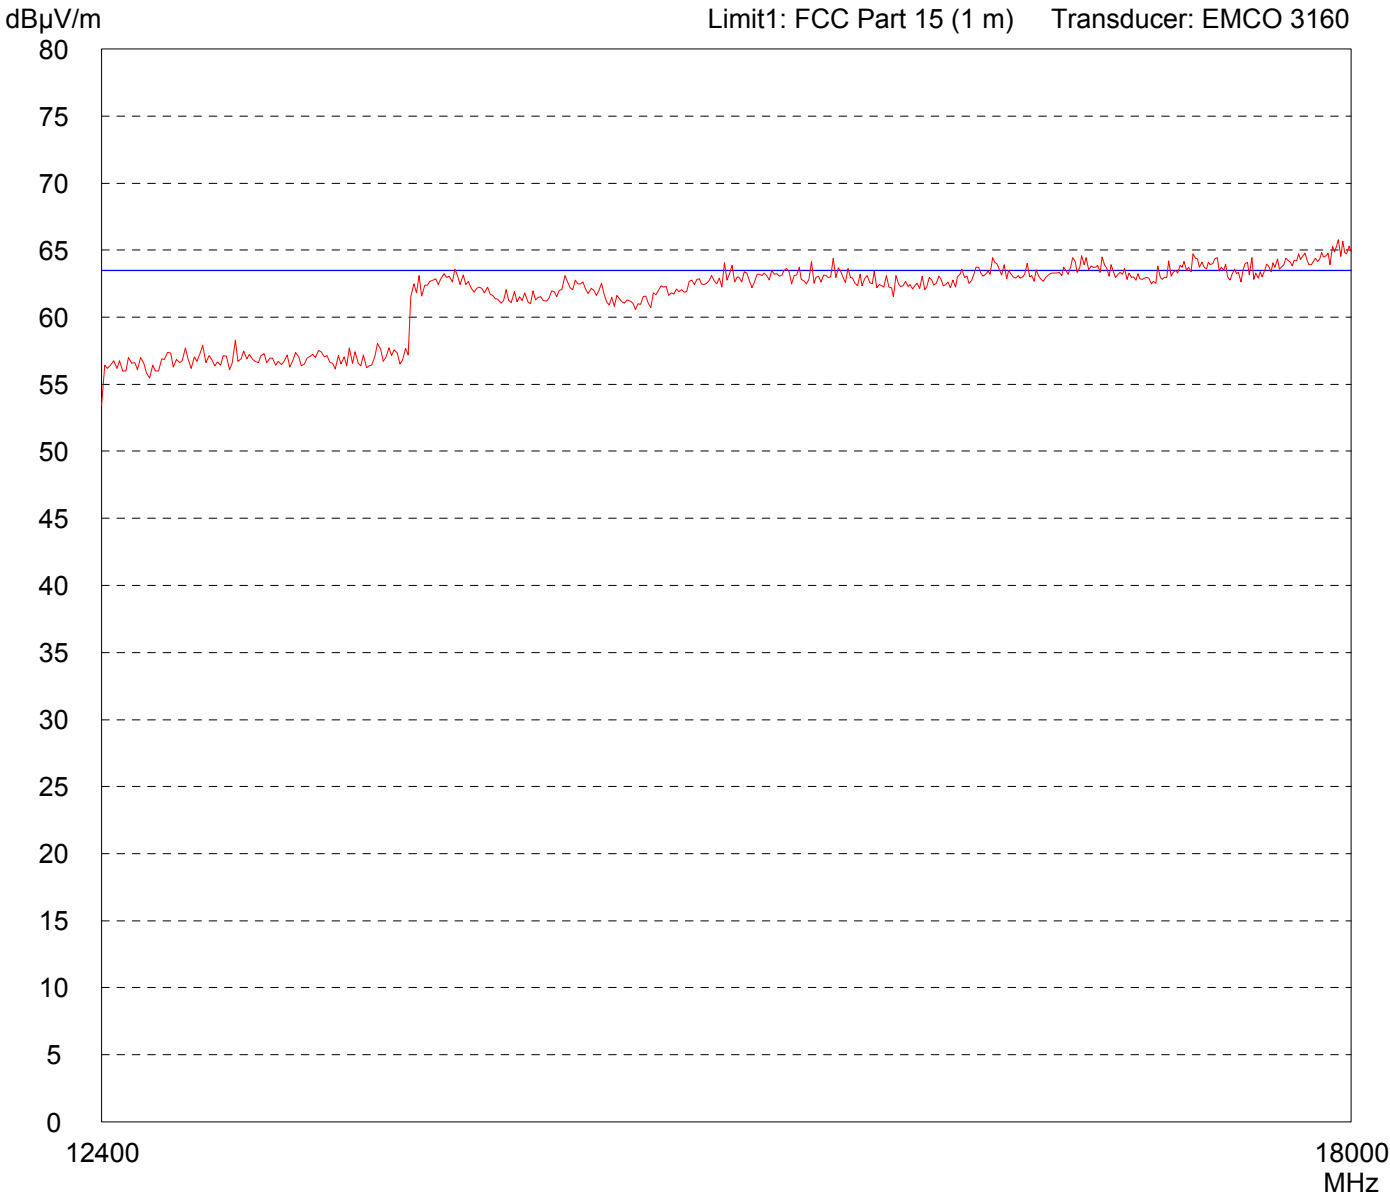

Result:
Limit kept

Project file:
50511-40907-3

Page 37 of 45 Pages


Radiated Emission Test 12.4 GHz - 18 GHz acc. to FCC Part 15 (EMCO 3160)

| | |
|--|----------------------------------|
| Model: FMR-25X | |
| Serial no.: Horn Antenna | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 1 meter Vertical Polarization | |
| Date of test: 03/08/2006 | Operator: J. Roidt |
| Test performed: automatically | File name: default.emi |

Comment:
- "Virtual Tank" Mode
(EUT Antenna pointing downwards)

Detector:
Peak

List of values:
Selected by hand

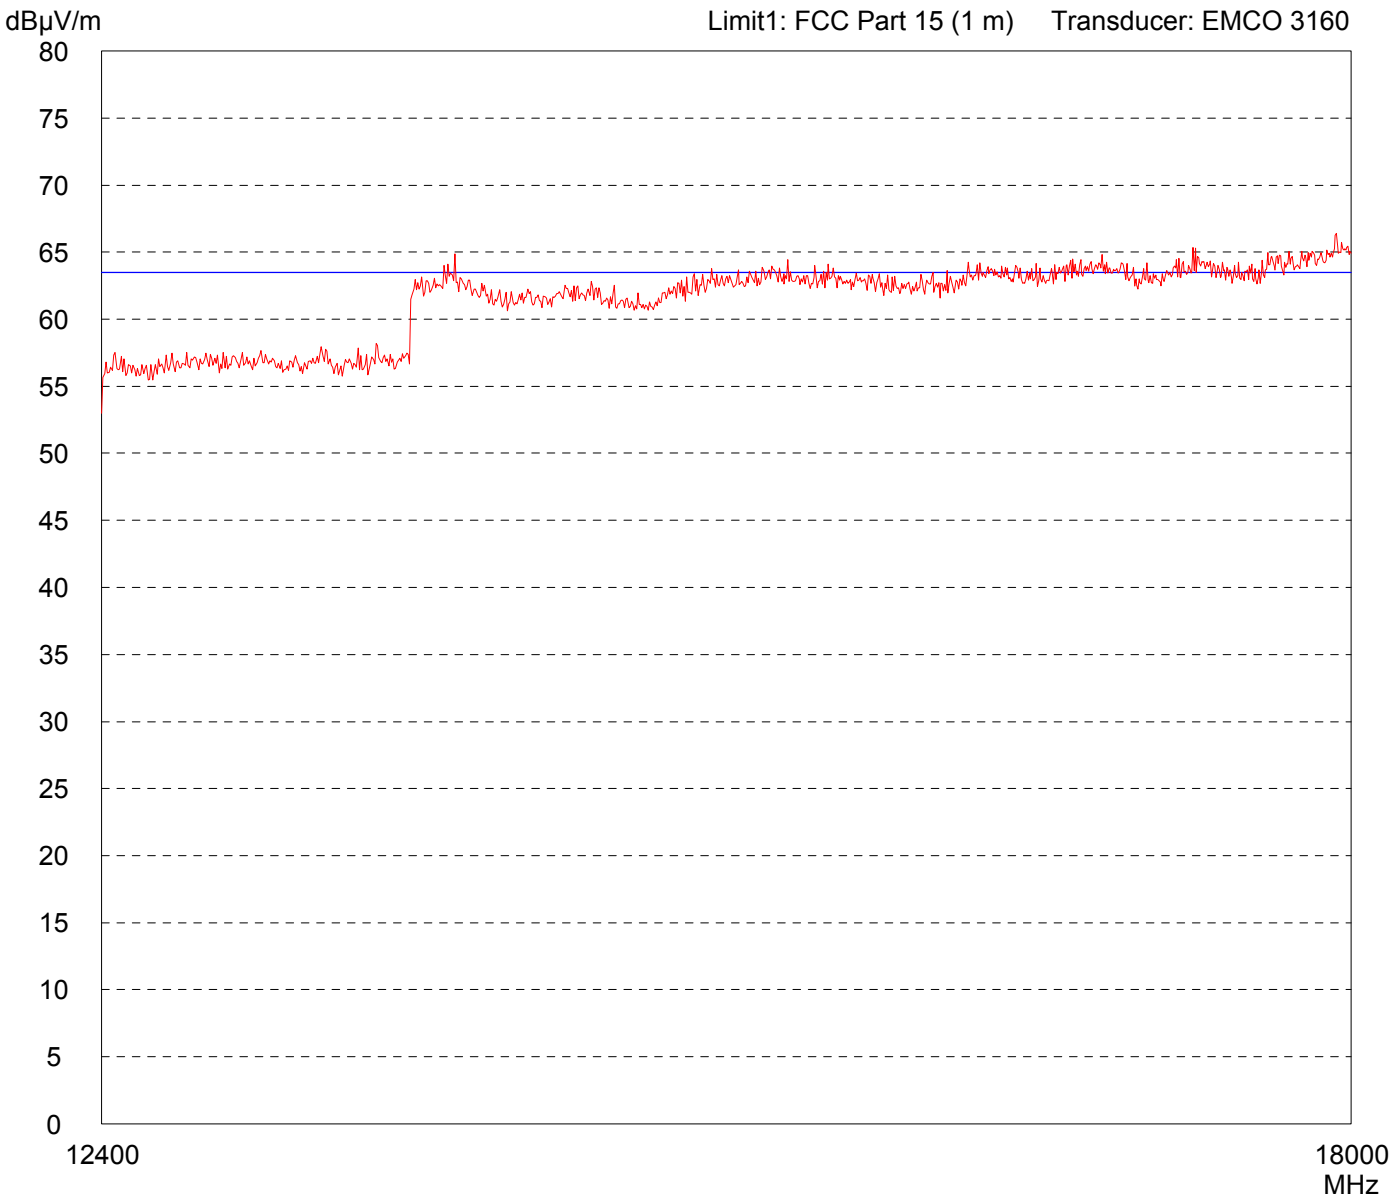

Result:
Limit kept

Project file:
50511-40907-3

Page 38 of 45 Pages


Spurious emissions according to FCC Rules, Section 15.209

| | |
|---|--|
| <p>Model: Solid Radar FMR 25X</p> <hr/> <p>Serial No.:</p> <hr/> <p>Applicant: Endress + Hauser GmbH & Co. KG</p> <hr/> <hr/> <hr/> <hr/> | <p>Mode:</p> <ul style="list-style-type: none"> - EUT with Horn Antenna - DC 24 V power supply - EUT in vertical position - continuous measurement - Measurement Distance: 0.50 m - Polarisation: horizontal |
|---|--|

Ref.Level 75 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset 43 dB

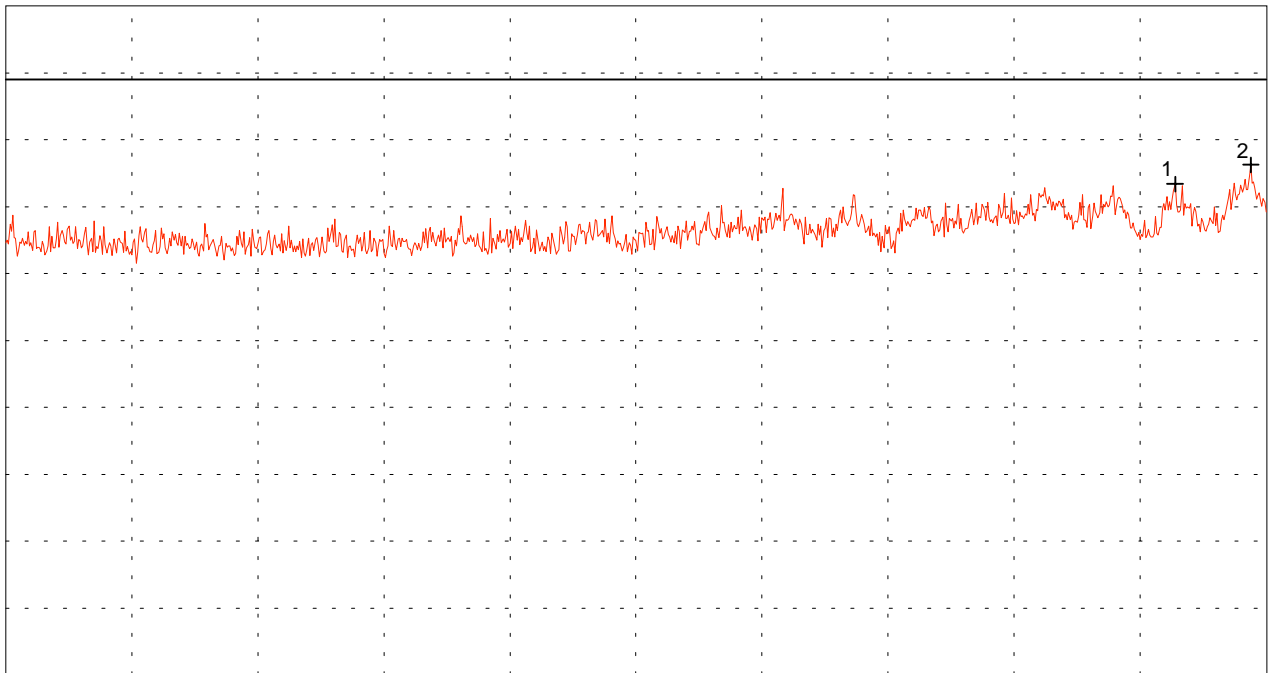

Start 18.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 26.500 GHz
SWP 40 ms

Multi Marker List

| | | |
|-------|---------------|------------------|
| No. 1 | 25.886111 GHz | 61.70 dB μ V |
| No. 2 | 26.396111 GHz | 63.12 dB μ V |

| |
|------------------------------------|
| <p>Tested by: Johann Roidt</p> |
| <p>Date: 01 March 2006</p> |

| |
|--------------------------------------|
| <p>Project-No.: 505011-40907</p> |
| <p>Page 39 of 45 Pages</p> |


Spurious emissions according to FCC Rules, Section 15.209

| | |
|--|--|
| Model: Solid Radar FMR 25X | Mode: - EUT with Horn Antenna - DC 24 V power supply - EUT in vertical position - continuous measurement - Measurement Distance: 0.50 m - Polarisation: vertical |
| Serial No.: | |
| Applicant: Endress + Hauser GmbH & Co. KG | |
| | |
| | |
| | |

Ref.Level 75 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset 43 dB

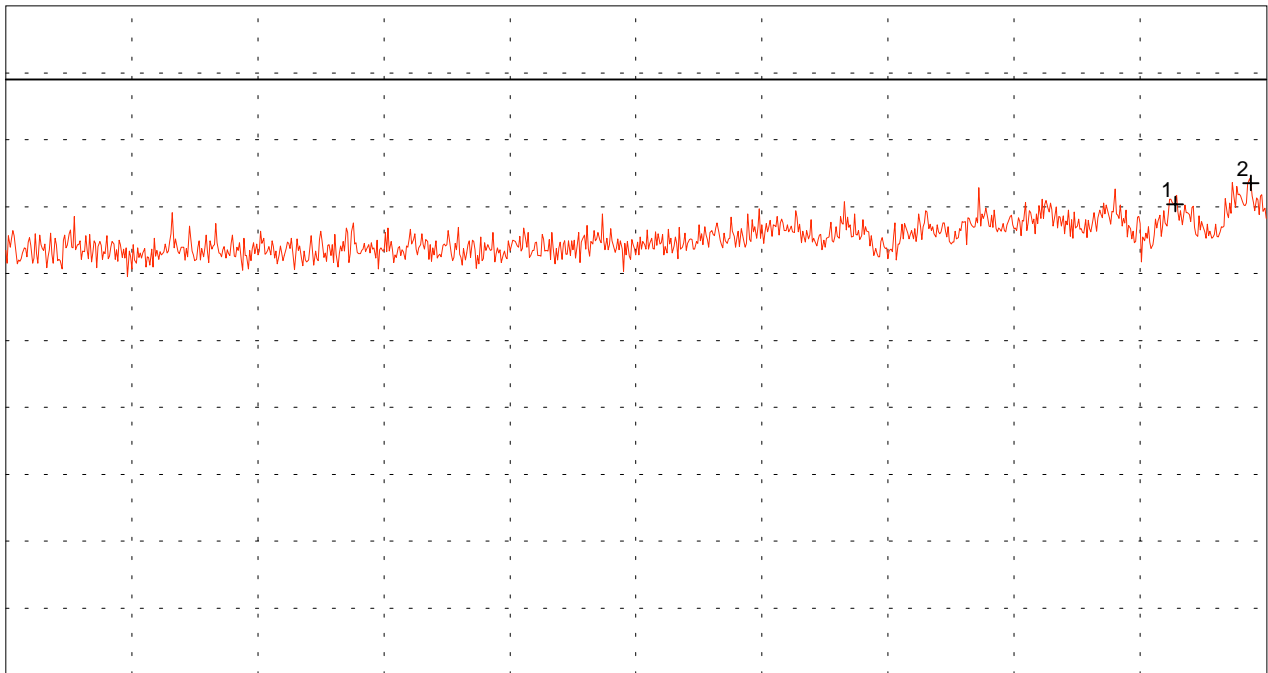

Start 18.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 26.500 GHz
SWP 40 ms

Multi Marker List

| | | |
|-------|---------------|------------------|
| No. 1 | 25.886111 GHz | 60.19 dB μ V |
| No. 2 | 26.396111 GHz | 61.77 dB μ V |

| |
|----------------------------|
| Tested by: Johann Roidt |
| Date: 01 March 2006 |


| |
|------------------------------|
| Project-No.: 505011-40907 |
| Page 40 of 45 Pages |

Spurious emissions according to FCC 15 C

| | |
|---|---|
| Model: Solid Radar 25x* | Mode: - DC 24 V power supply with 330 Ohms communication resistor |
| Serial No.: Horn Antenna | - EUT in vertical position |
| Applicant: Endres + Hauser GmbH & Co. KG | - continuous measurement |
| | - Measurement Distance: 0.50 m |
| | - Polarisation: horizontal |
| | |
| | |

Ref.Level 22 dB μ V
5 dB/Div.

ATT 0 dB

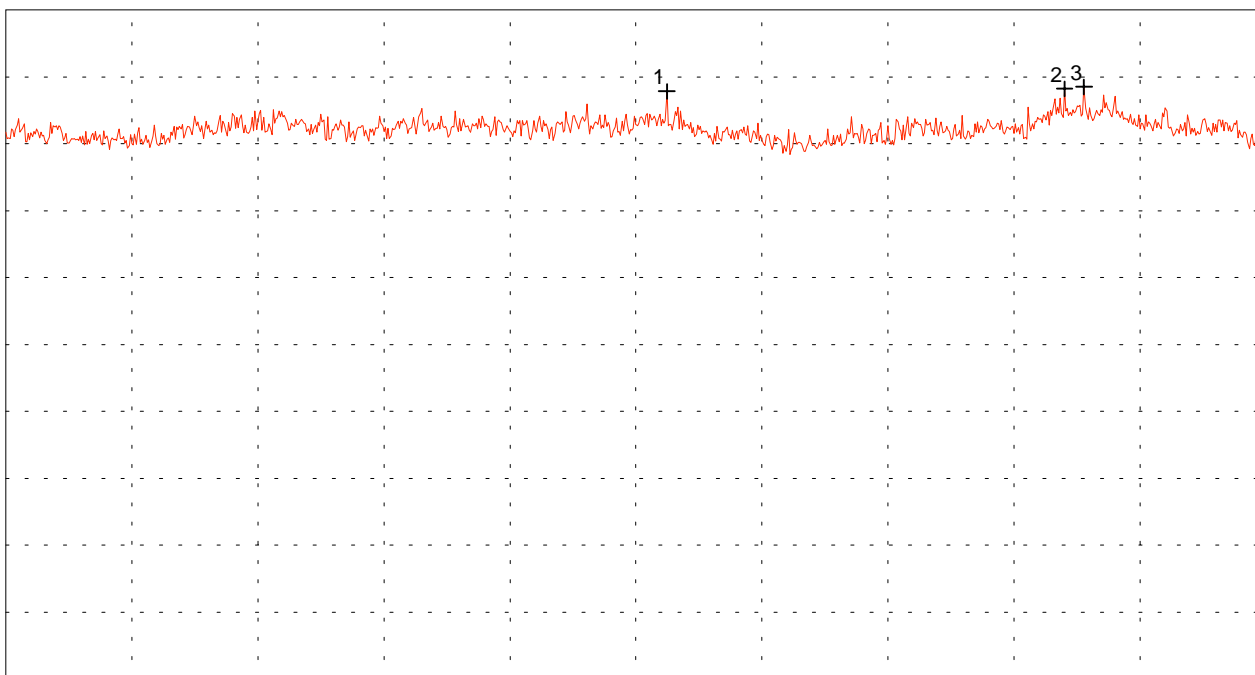

Start 26.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 40.000 GHz
SWP 60 ms

Multi Marker List

| | | |
|-------|---------------|------------------|
| No. 1 | 33.342222 GHz | 15.91 dB μ V |
| No. 2 | 37.760000 GHz | 16.11 dB μ V |
| No. 3 | 37.977778 GHz | 16.25 dB μ V |

| |
|--------------------------|
| Tested by: M. Steindl |
| Date: 02/22/2005 |


| |
|-----------------------------|
| Project-No.: 50511-40907 |
| Page 41 of 45 Pages |

Spurious emissions according to FCC 15 C

| | |
|---|---|
| Model: Solid Radar 25x | Mode: - DC 24 V power supply with 330 Ohms communication resistor |
| Serial No.: Horn Antenna | - EUT in vertical position |
| Applicant: Endres + Hauser GmbH & Co. KG | - continuous measurement |
| | - Measurement Distance: 0.50 m |
| | - Polarisation: vertical |
| | |
| | |

Ref.Level 22 dB μ V
5 dB/Div.

ATT 0 dB

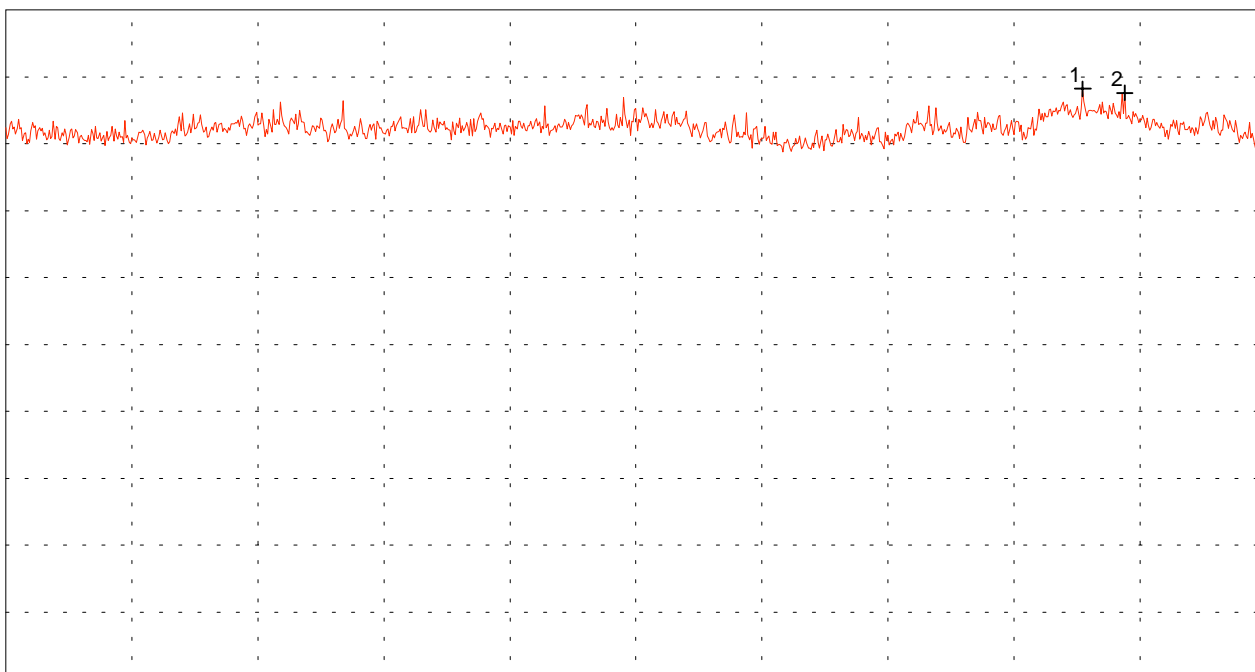

Start 26.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 40.000 GHz
SWP 60 ms


Multi Marker List

| | | |
|-------|---------------|------------------|
| No. 1 | 37.962222 GHz | 16.11 dB μ V |
| No. 2 | 38.428889 GHz | 15.80 dB μ V |


| |
|--------------------------|
| Tested by: M. Steindl |
| Date: 02/22/2005 |

| |
|-----------------------------|
| Project-No.: 50511-40907 |
| Page 42 of 45 Pages |

Radiated Emissions according to FCC Rules, Section 15.209 Test Chart 40 - 50 GHz

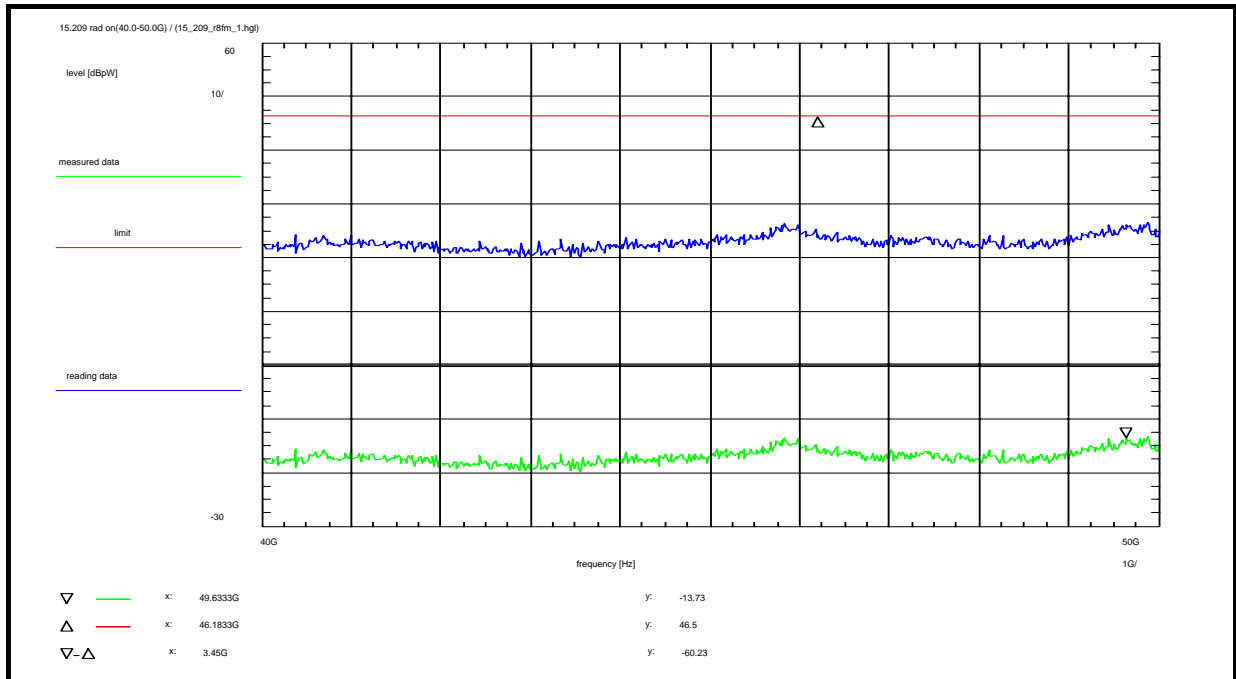

Test Chart 50 - 75 GHz

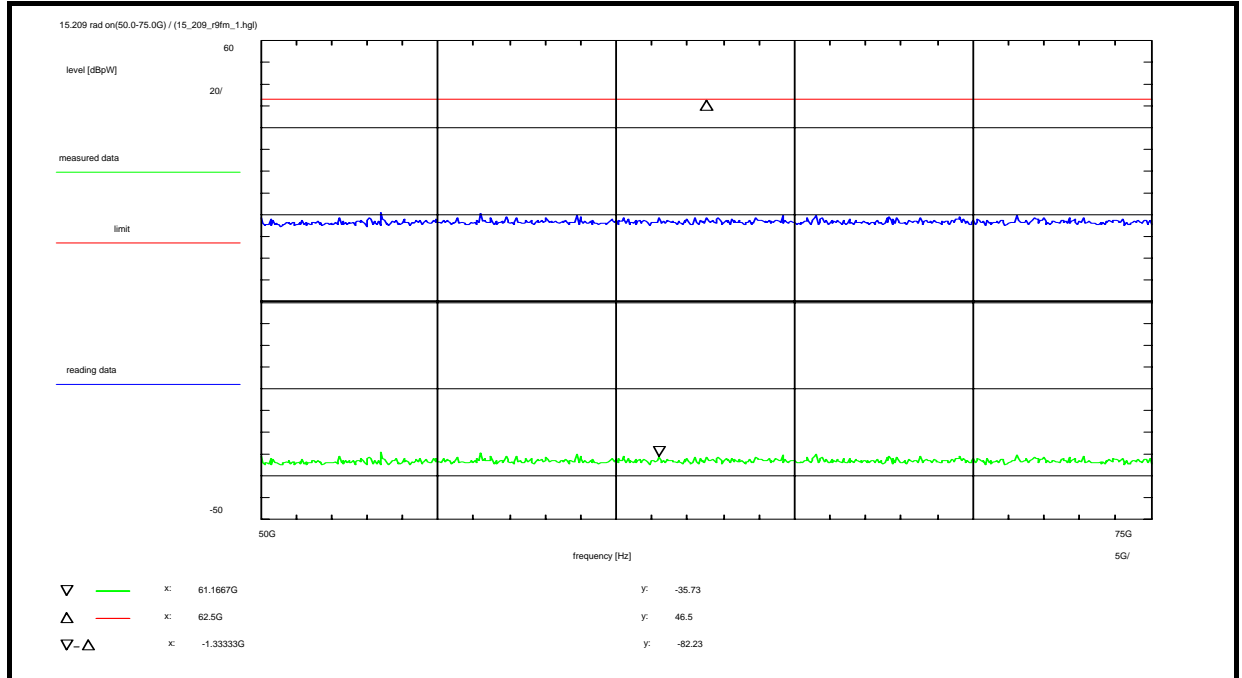

Test Chart 75 - 110 GHz

