



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless-N Boardband Home Router

Model: RMN302

Trade Name: Cisco

Issued to

Cisco System Inc.

170 West Tasman Drive, San Jose, CA 95134, United States

Issued by



Compliance Certification Services Inc.
No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,
Taoyuan Shien, (338), Taiwan, R.O.C.
<http://www.ccsrf.com>
service@ccsrf.com



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	8
4.3 MEASUREMENT UNCERTAINTY	9
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT.....	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT	12
7. FCC PART 15.247 REQUIREMENTS.....	13
7.1 6DB BANDWIDTH.....	13
7.2 PEAK POWER.....	26
7.3 AVERAGE POWER	28
7.4 BAND EDGES MEASUREMENT	30
7.5 PEAK POWER SPECTRAL DENSITY.....	47
7.6 SPURIOUS EMISSIONS.....	62
7.7 RADIATED EMISSIONS	76
7.8 POWERLINE CONDUCTED EMISSIONS.....	93
APPENDIX I RADIO FREQUENCY EXPOSURE.....	96
APPENDIX II PHOTOGRAPHS OF TEST SETUP	99
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: Cisco System Inc.
 170 West Tasman Drive, San Jose, CA 95134, United States

Equipment Under Test: Wireless-N Boardband Home Router

Trade Name: Cisco

Model Number: RMN302

Date of Test: September 30 ~ October 18, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
 Section Manager
 Compliance Certification Services Inc.

Gina Lo
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless-N Boardband Home Router				
Trade Name	Cisco				
Model Number	RMN302				
Model Discrepancy	N/A				
Power Adapter	Power from Adapter I.T.E / Model: MU30-5120250-A1 I/P: 100-240V, 50-60Hz, 0.8A O/P: 12V, 2.5A				
Frequency Range	2412 ~ 2462 MHz				
Transmit Power	IEEE 802.11b mode: 16.54 dBm (45.08 mW) IEEE 802.11g mode: 24.01 dBm (251.77 mW) IEEE 802.11n HT 20 MHz mode: 26.67 dBm (464.52 mW) IEEE 802.11n HT 40 MHz mode: 26.48 dBm (444.63 mW)				
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.22, 13, 14.44, 19.5, 21.67, 26, 28.89, 39, 43.33, 52, 57.78, 57.78, 58.5, 65.0, 72.22, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)				
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels				
Antenna Specification	PIFA Antenna: <table border="1" style="margin-left: 20px;"> <tr> <td>Left</td> <td>Right</td> </tr> <tr> <td>2.64 dBi</td> <td>2.64 dBi</td> </tr> </table> Antenna Calculation for MIMO Mode: $2.64\text{dBi} + 10 \log (2) = 5.65 \text{ dBi}$ (Numeric gain: 3.67)	Left	Right	2.64 dBi	2.64 dBi
Left	Right				
2.64 dBi	2.64 dBi				

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **LDK-RMN302** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: RMN302) had been tested under operating and standby condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Power Meter	Agilent	E4416A	GB41291611	06/27/2011
Power Sensor	Agilent	E9327A	US40441097	06/27/2011

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/25/2011
EMI Test Receiver	R&S	ESCI	100064	02/04/2011
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2011
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/20/2010
Bilog Antenna	Sunol Sciences	JB3	A030105	09/10/2011
Horn Antenna	EMCO	3117	00055165	12/07/2010
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/31/2010
Test S/W	EZ-EMC (CCS-3A1RE)			

Powerline Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESHS20	840455/006	02/28/2011
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127527	12/16/2010
LISN	SCHWARZBECK	NSLK 8127	8127526	12/16/2010
BNC CABLE	MIYAZAKI	5D-FB	BNC A5	02/01/2011
THERMO-HYGRO METER	TECPEL	DTM-303	NO.3	11/23/2010
Test S/W	EZ-EMC			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.6202
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No. No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.





Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 ACCREDITED No. 0824-01
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 FC TW1026
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-321/325
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	 IAC-MRA TAF Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 2324C-3 IC 2324C-5

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Trade Name	Data Cable	Power Cord
1-2	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
3	Earphone & Microphone	MSB301	N/A	N/A	e-Sense	Unshielded, 1.8m	N/A
4	USB Mouse	MO56UC	443007221	DOC BSMI: R41108	DELL	Shielded, 1.8m	N/A
5-6	USB 2.0 HDD	HD-234	N/A	N/A	A-Tec	Shielded, 1.0m	N/A
7	Notebook	2210B	CNV7472KG5	DOC BSMI: R33001	HP	Unshielded, 1.6m	Unshielded, 1.8m
8	Monitor	933SN+	N/A	DOC BSMI: R33475	SAMSUNG	Shielded, 1.8m with two cores	Unshielded, 1.8m
9	Wireless-N Boardband Home Router	RMN302	N/A	N/A	Cisco	BNC: Unshielded, 20m LAN: Unshielded, 20m	Unshielded, 1.8m
10	Server Notebook	Compaq 2210b	CNU7472KDP	N/A	HP	Unshielded, 1.0m	Unshielded, 1.8m
11	LAN Cable X3	N/A	N/A	N/A	N/A	Unshielded, 3.0m	N/A
12	Notebook PC	1951-I3V(T60)	L3B2188	FCC DoC	IBM	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	7.83	>500	PASS
Mid	2437	7.33		PASS
High	2462	7.25		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.08	>500	PASS
Mid	2437	16.33		PASS
High	2462	16.25		PASS



Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.00	>500	PASS
Mid	2437	15.08		PASS
High	2462	15.08		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.25	>500	PASS
Mid	2437	16.08		PASS
High	2462	17.42		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.83	>500	PASS
Mid	2437	34.08		PASS
High	2452	36.25		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.08	>500	PASS
Mid	2437	33.08		PASS
High	2452	35.33		PASS



Test Plot


IEEE 802.11b mode

6dB Bandwidth (CH Low)

Agilent 20:19:30 Oct 18, 2010

R T

Δ Mkr1 7.83 MHz
-0.90 dB

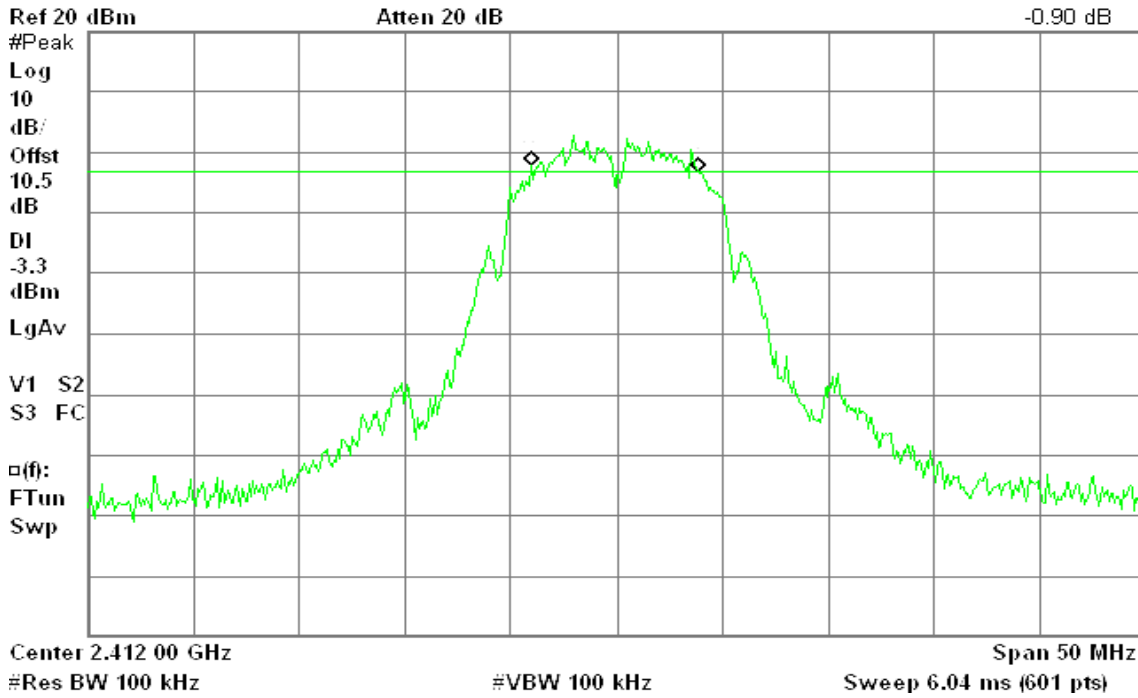


6dB Bandwidth (CH Mid)

Agilent 20:26:17 Oct 18, 2010

R T

Δ Mkr1 7.33 MHz
-0.37 dB

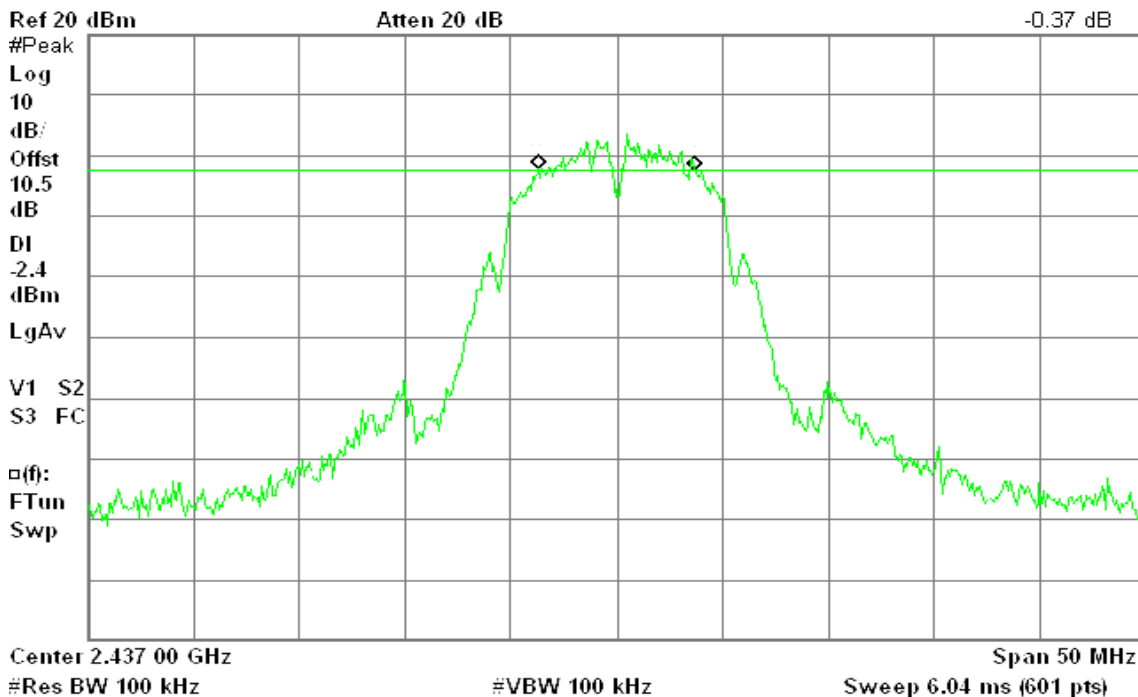




6dB Bandwidth (CH High)

Agilent 20:30:02 Oct 18, 2010

R T

Δ Mkr1 7.25 MHz
0.88 dB

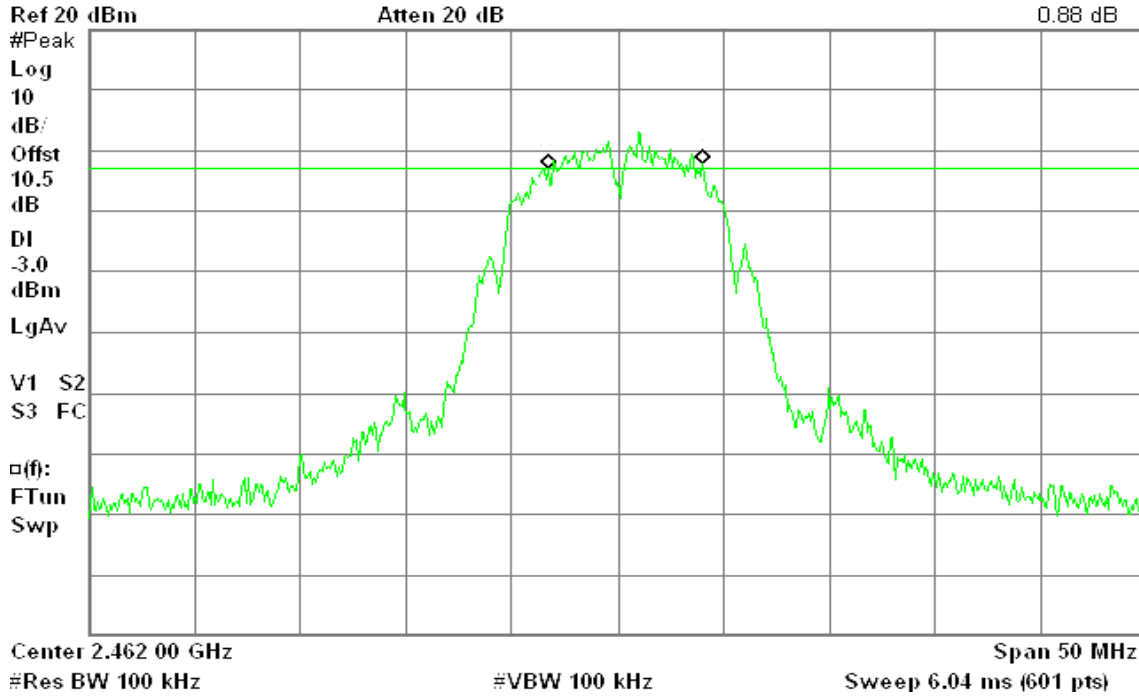




IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 20:33:58 Oct 18, 2010

R T

Δ Mkr1 16.08 MHz
-0.50 dB

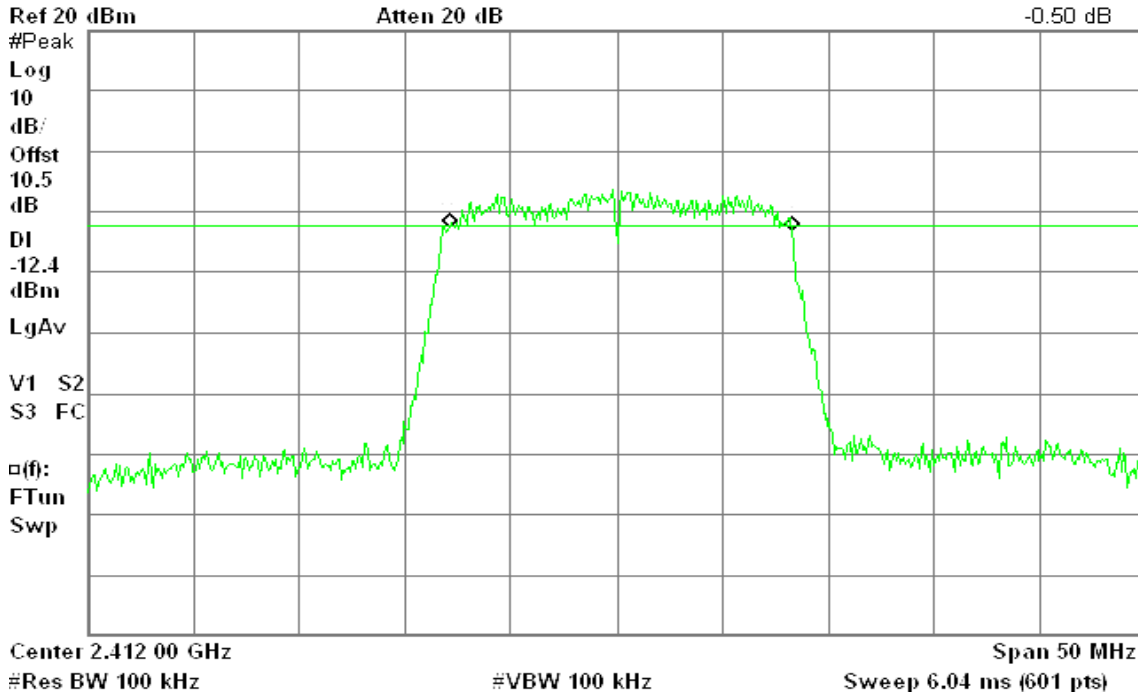


6dB Bandwidth (CH Mid)

Agilent 20:38:17 Oct 18, 2010

R T

Δ Mkr1 16.33 MHz
1.38 dB

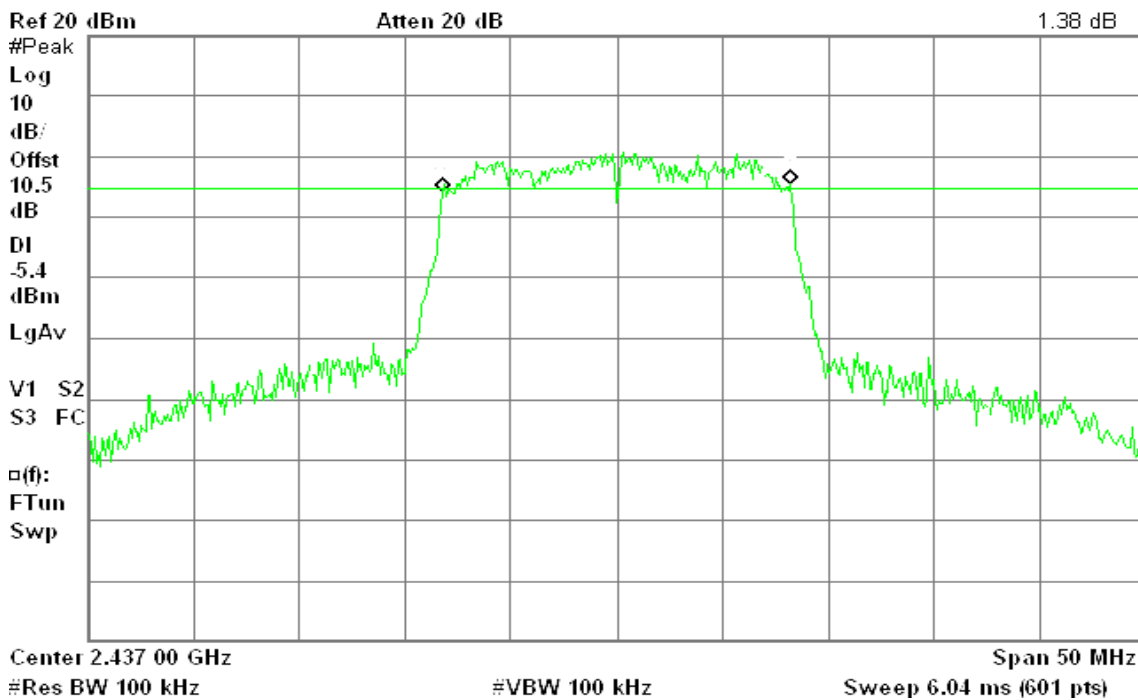




6dB Bandwidth (CH High)

Agilent 20:41:56 Oct 18, 2010

R T

Δ Mkr1 16.25 MHz
0.55 dB

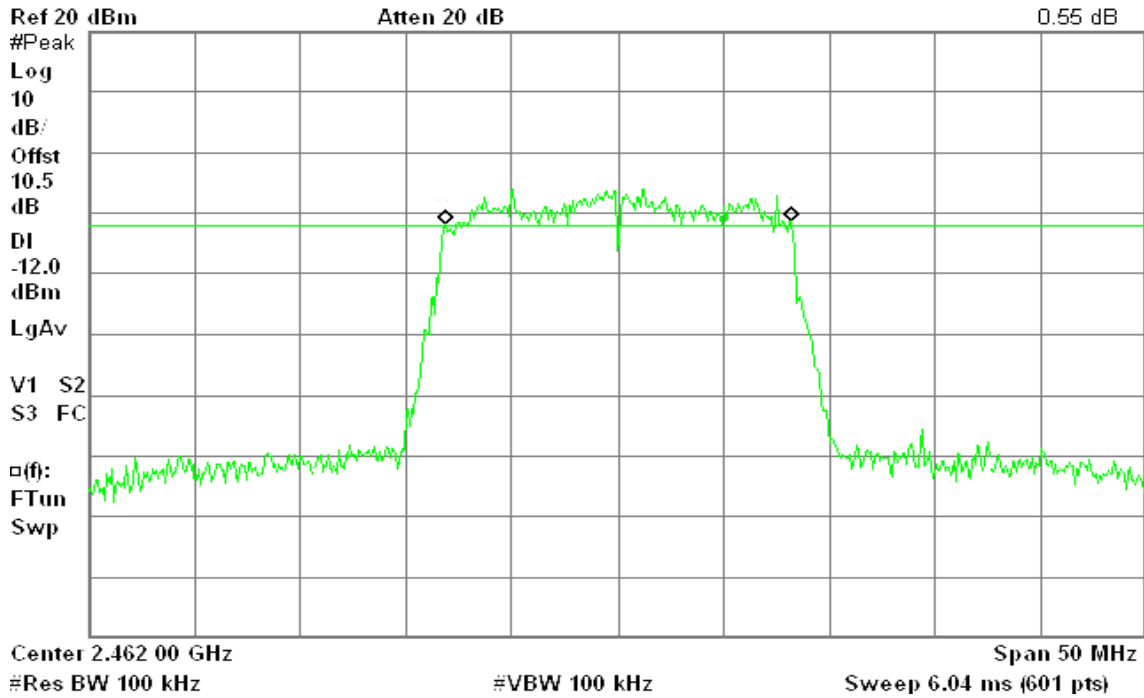




IEEE 802.11n HT 20 MHz mode / Chain 0

6dB Bandwidth (CH Low)

Agilent 20:47:15 Oct 18, 2010

R T

Δ Mkr1 16.00 MHz
-0.61 dB

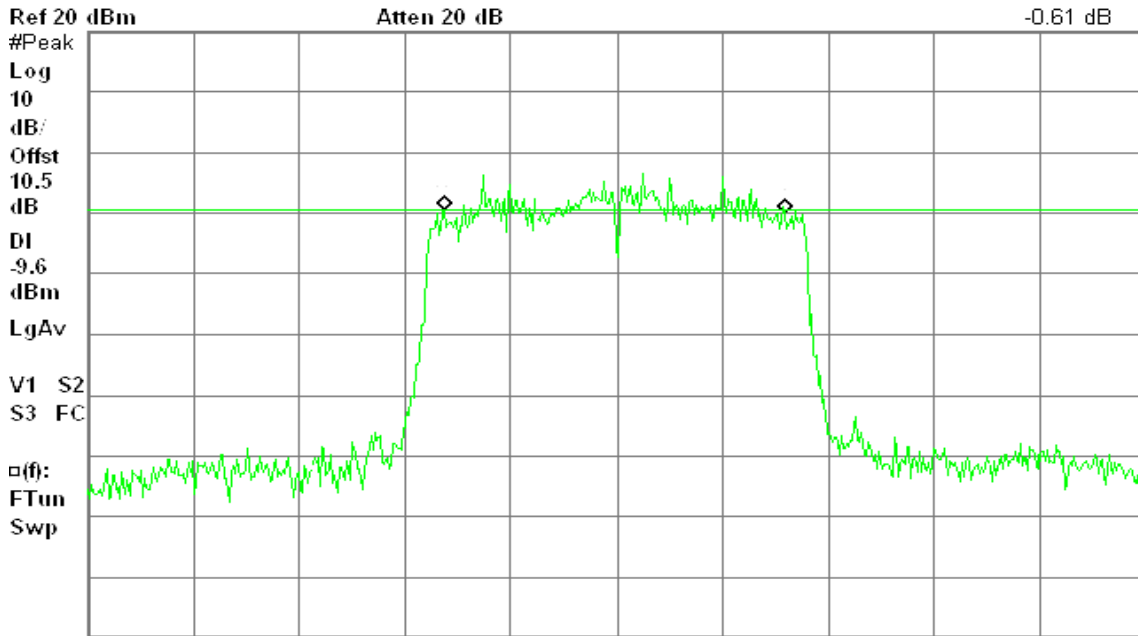

Center 2.412 00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 50 MHz


Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 20:51:52 Oct 18, 2010

R T

Δ Mkr1 15.08 MHz
2.09 dB

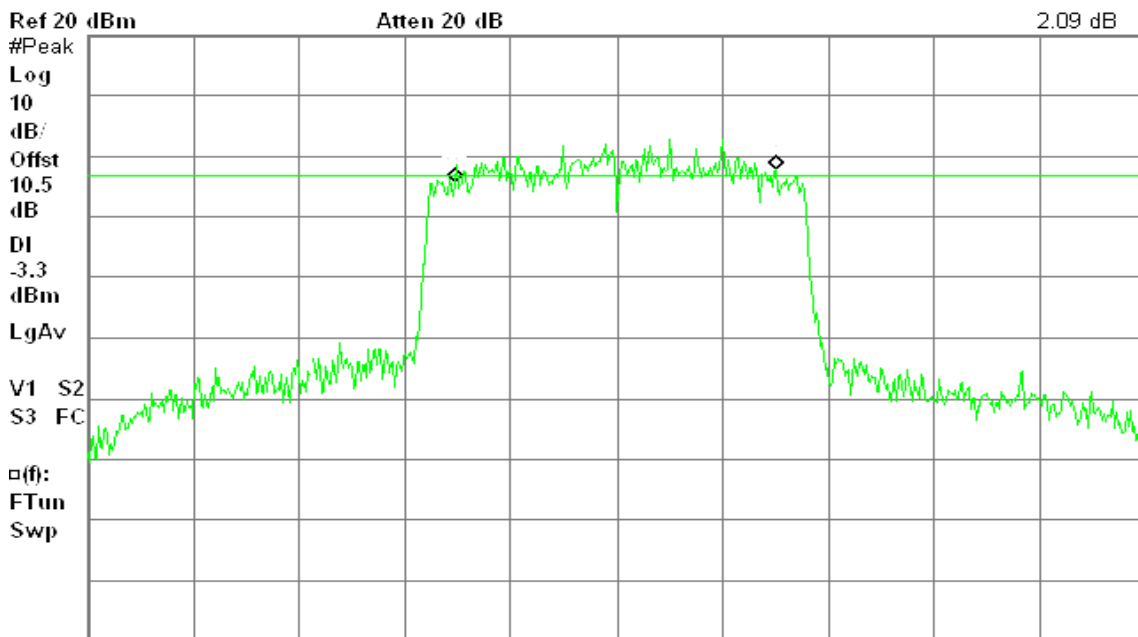

Center 2.437 00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 50 MHz

Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH High)

Agilent 20:56:11 Oct 18, 2010

R T

Δ Mkr1 15.08 MHz
0.97 dB

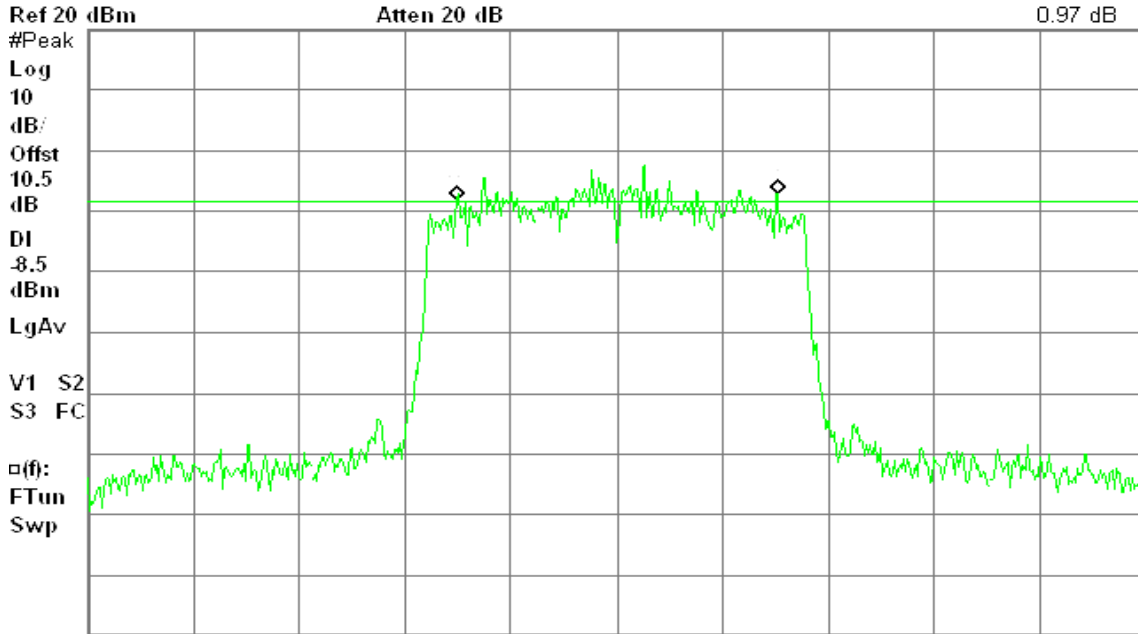

Center 2.462 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)


IEEE 802.11n HT 20 MHz mode / Chain 1

6dB Bandwidth (CH Low)

Agilent 21:08:22 Oct 18, 2010

R T

Δ Mkr1 17.25 MHz
-1.08 dB

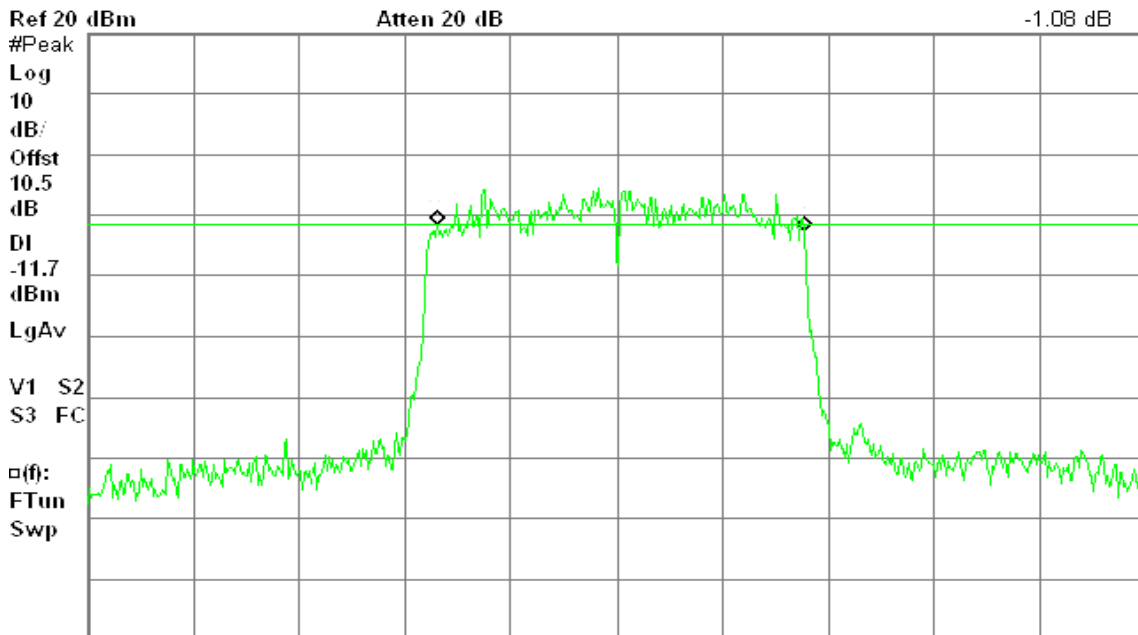

Center 2.412 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH Mid)

Agilent 21:04:26 Oct 18, 2010

R T

Δ Mkr1 16.08 MHz
-1.25 dB

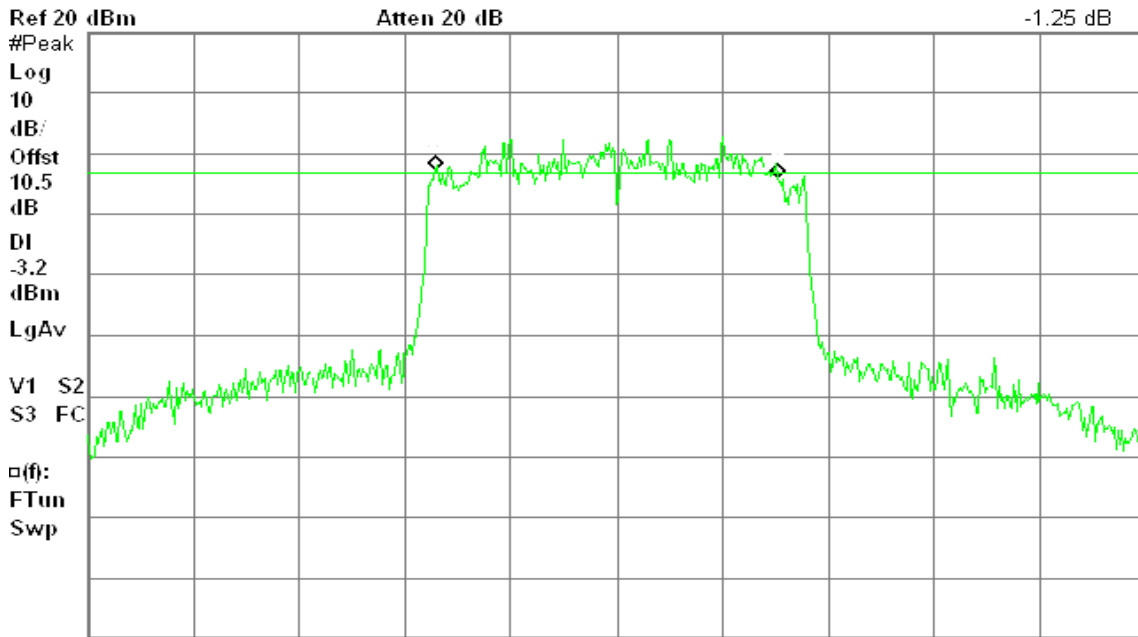

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 21:00:37 Oct 18, 2010

R T

Δ Mkr1 17.42 MHz
0.13 dB

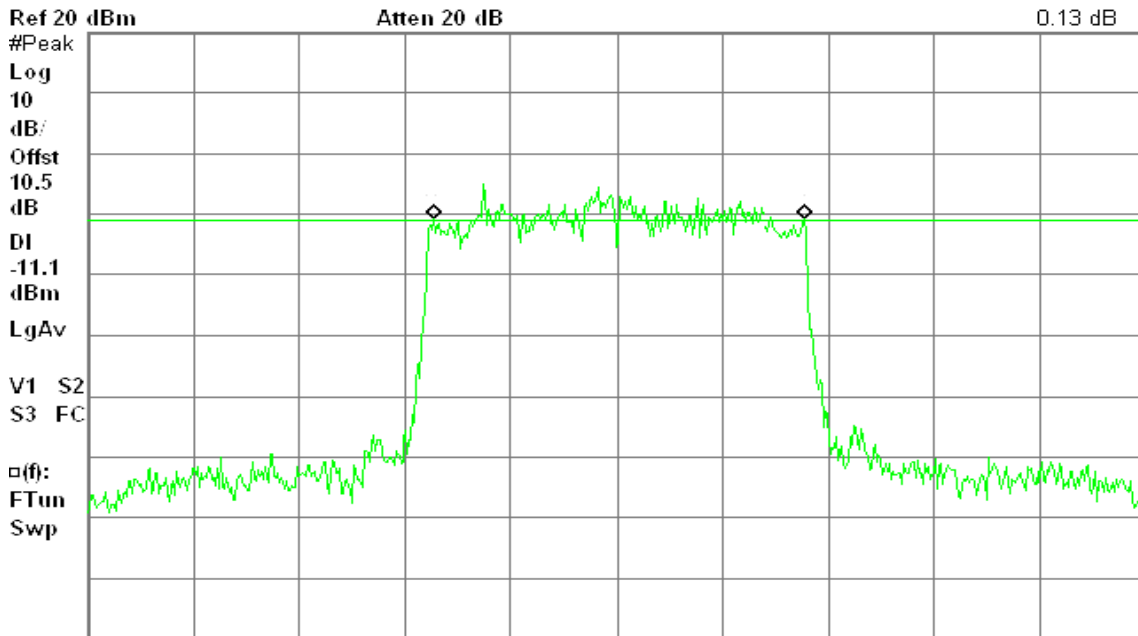

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




IEEE 802.11n HT 40 MHz mode / Chain 0

6dB Bandwidth (CH Low)

Agilent 21:34:11 Oct 18, 2010

R T

Δ Mkr1 35.83 MHz
1.54 dB

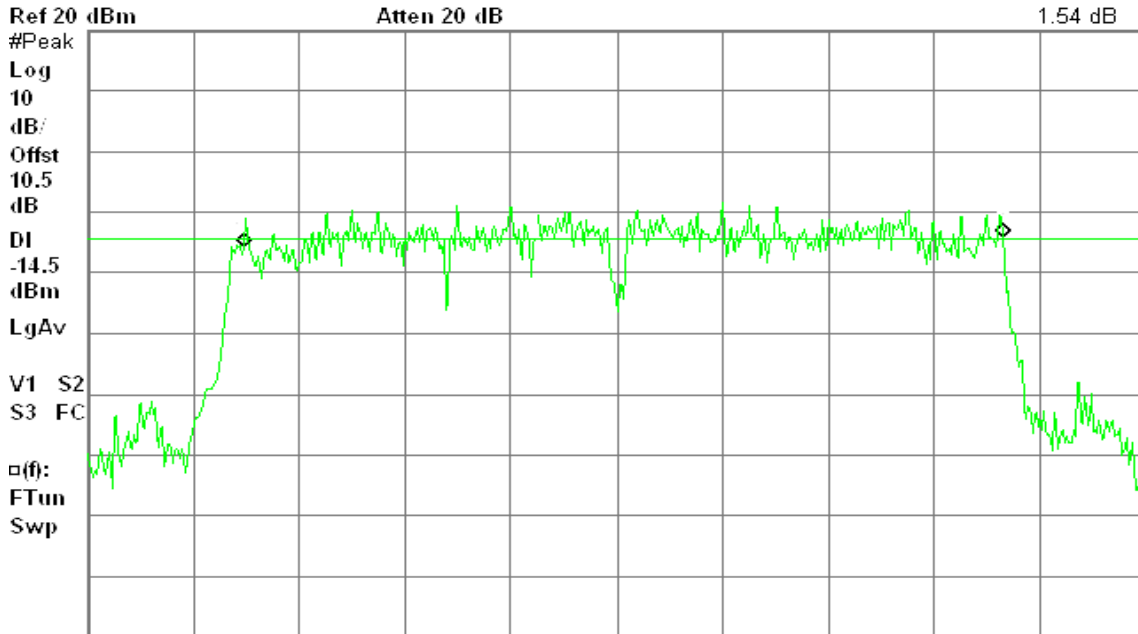

Center 2.422 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 21:30:31 Oct 18, 2010

R T

Δ Mkr1 34.08 MHz
-1.29 dB

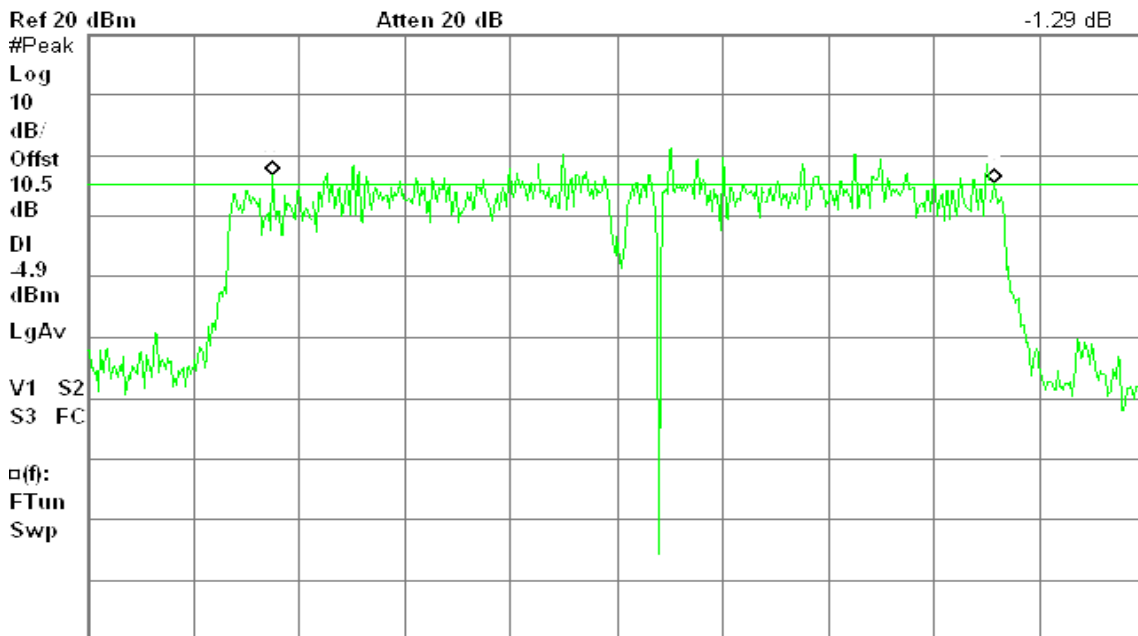

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH High)

Agilent 21:25:48 Oct 18, 2010

R T

Δ Mkr1 36.25 MHz
0.04 dB

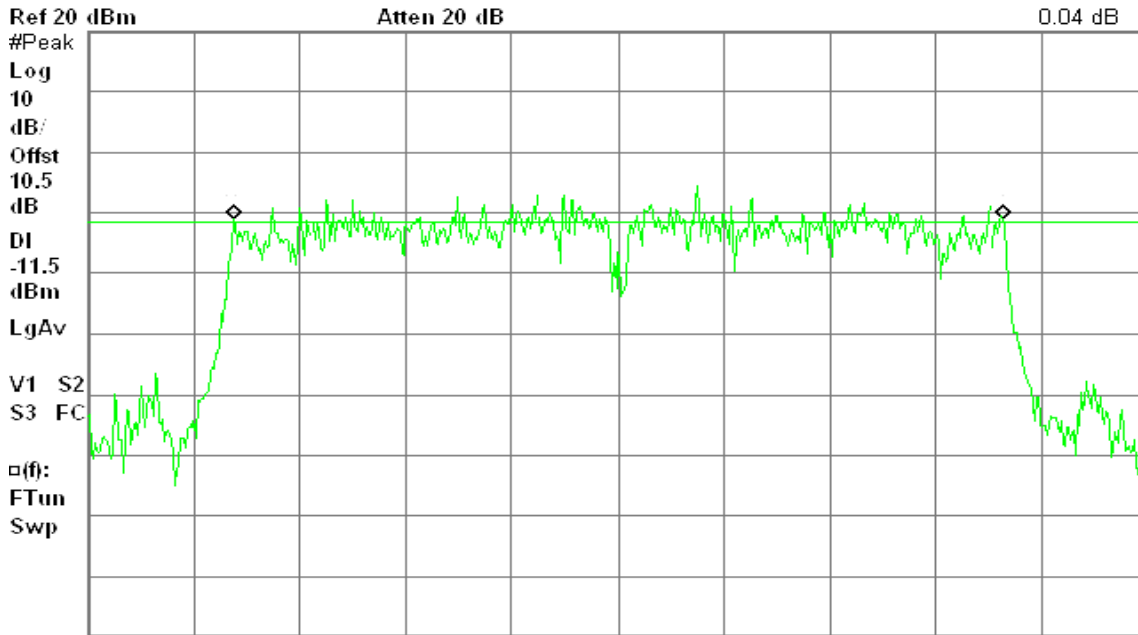

Center 2.452 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)


IEEE 802.11n HT 40 MHz mode / Chain 1

6dB Bandwidth (CH Low)

Agilent 21:13:32 Oct 18, 2010

R T

Δ Mkr1 36.08 MHz
-0.11 dB

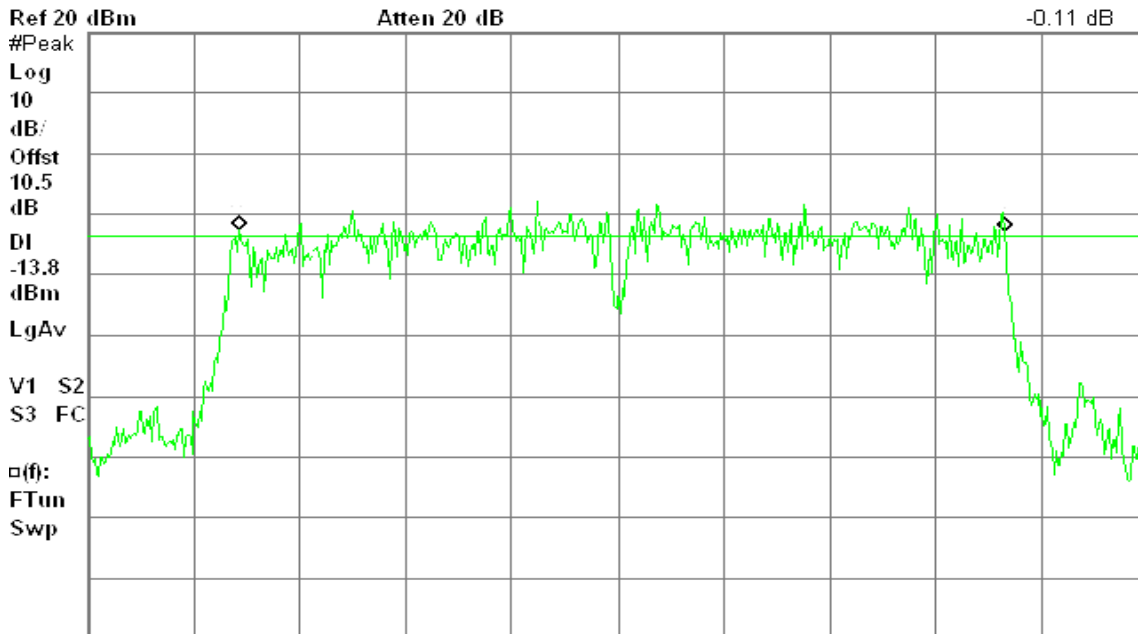

Center 2.422 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH Mid)

Agilent 21:17:29 Oct 18, 2010

R L

Δ Mkr1 33.08 MHz
-1.16 dB

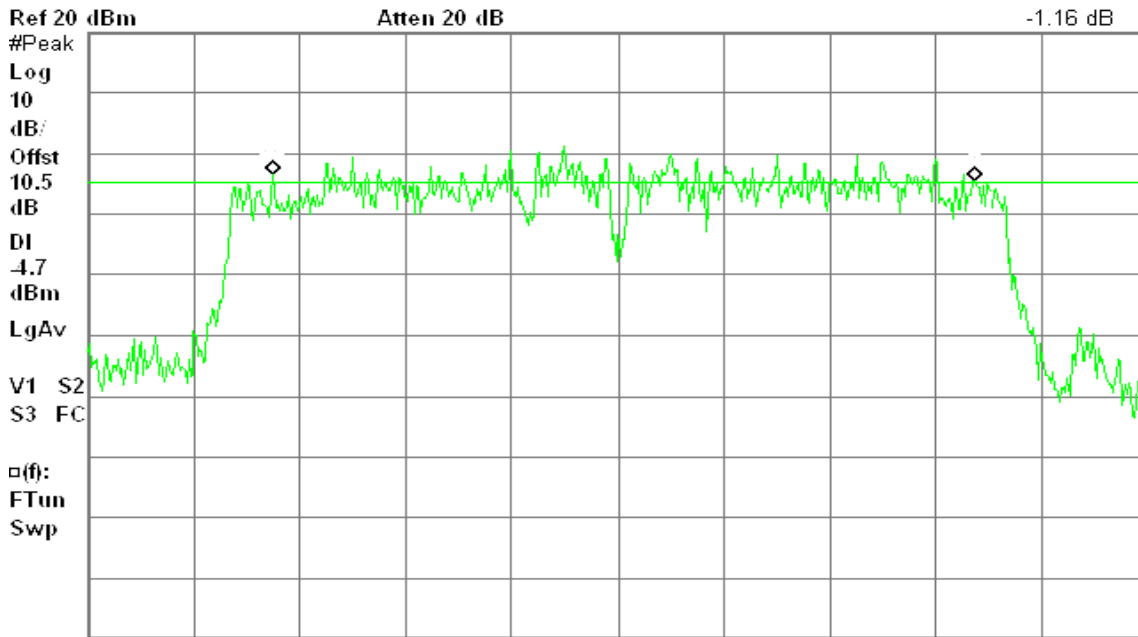


Center 2.437 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 21:21:24 Oct 18, 2010

R T

Δ Mkr1 35.33 MHz
-1.30 dB

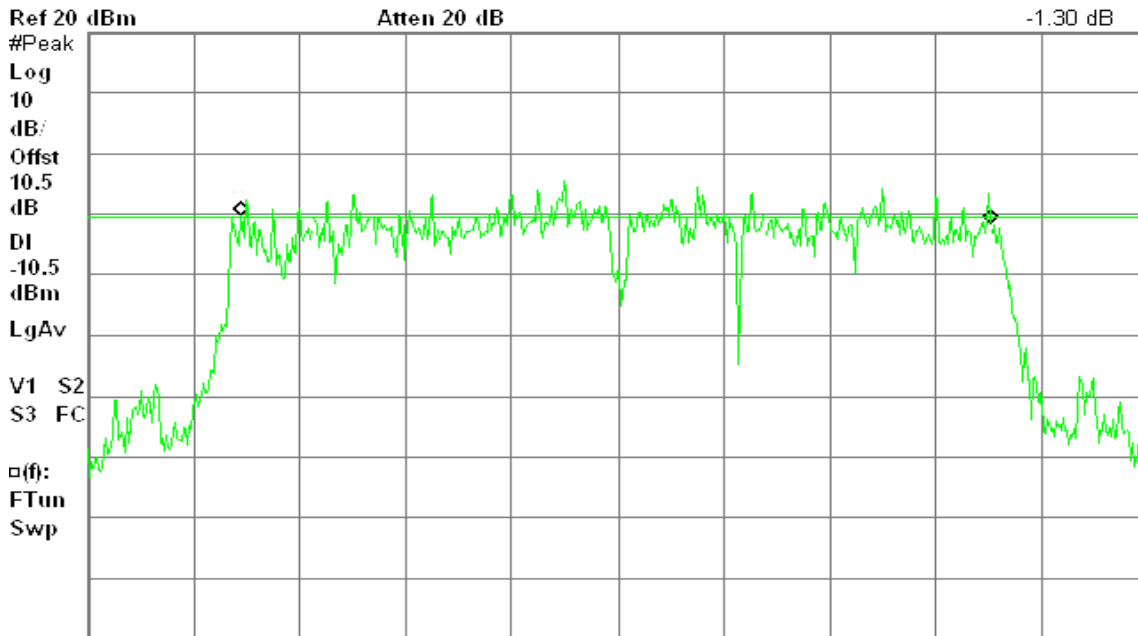

Center 2.452 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)



7.2 PEAK POWER

LIMIT


The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULTS

No non-compliance noted.

Test Configuration

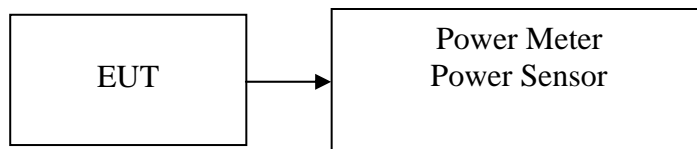

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.54	0.04508	1.00	PASS
Mid	2437	16.45	0.04416		PASS
High	2462	15.52	0.03565		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.62	0.05781	1.00	PASS
Mid	2437	24.01	0.25177		PASS
High	2462	17.25	0.05309		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.79	16.16	20.06	0.10139	1.00	PASS
Mid	2437	23.78	23.53	26.67	0.46452		PASS
High	2462	17.42	16.97	20.21	0.10495		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	16.41	16.14	19.29	0.08492	1.00	PASS
Mid	2437	23.1	23.81	26.48	0.44463		PASS
High	2452	17.57	17.35	20.47	0.11143		PASS

Remark: Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000)+ Chain 1 (10^(Output Power /10)/1000)




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration




TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Configuration

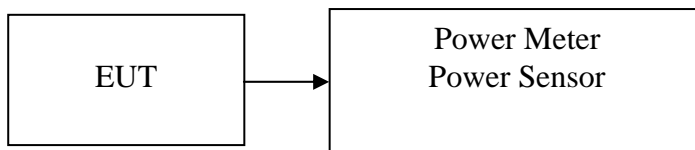

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	12.61	0.01824
Mid	2437	12.58	0.01811
High	2462	11.65	0.01462

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	7.38	0.00547
Mid	2437	14.43	0.02773
High	2462	7.42	0.00552

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)
Low	2412	5.15	4.63	7.91	0.00618
Mid	2437	11.92	11.85	14.90	0.03090
High	2462	4.98	4.63	7.82	0.00605

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)
Low	2422	2.11	2.34	5.24	0.00334
Mid	2437	9.77	10.48	13.15	0.02065
High	2452	3.11	2.95	6.04	0.00402

Remark: Total Output Power (w) = Chain 0 (10^{^(Output Power /10)}/1000)+ Chain 1 (10^{^(Output Power /10)}/1000)




7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

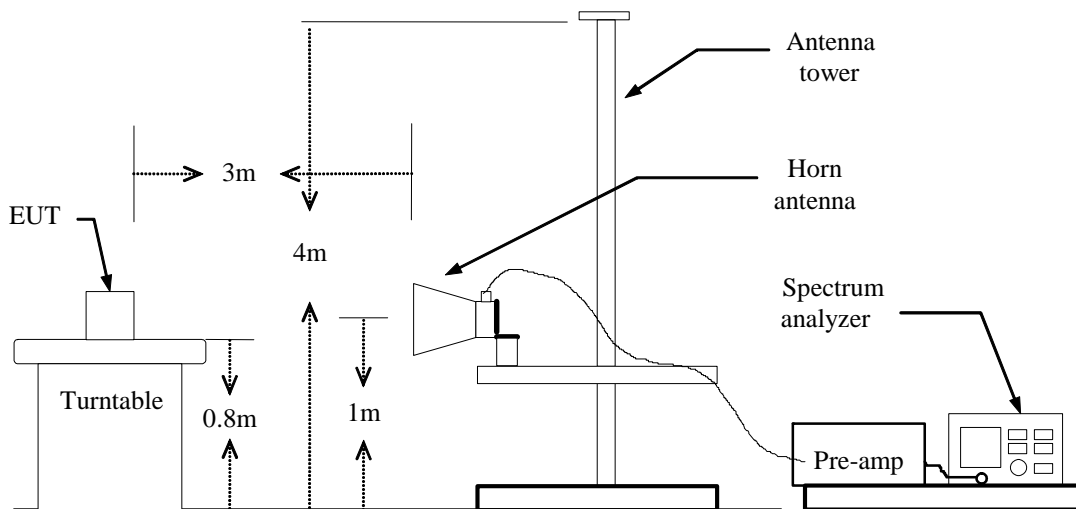

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 18:16:21 Oct 6, 2010

R T

Mkr1 2.374 8 GHz
56.20 dBμV

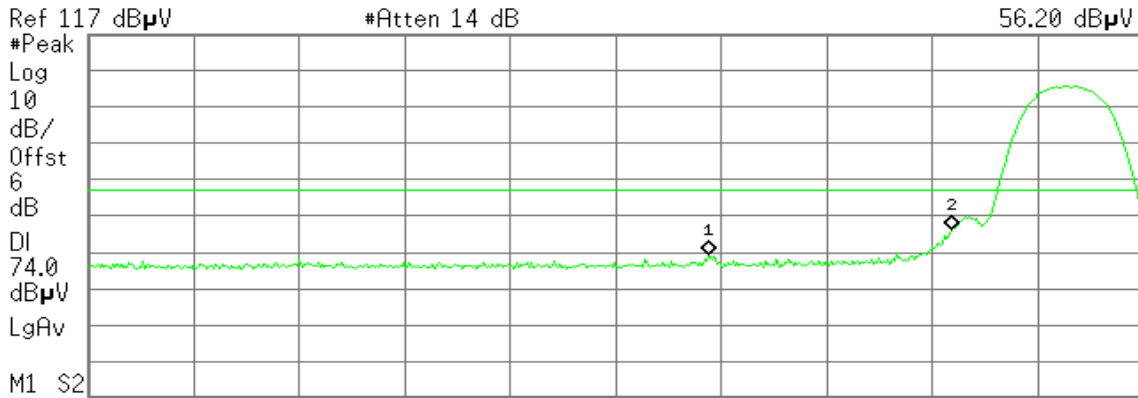

#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.374 8 GHz	56.20 dBμU
2	(1)	Freq	2.400 0 GHz	63.10 dBμU


Detector mode: Average

Polarity: Vertical

Agilent 18:15:31 Oct 6, 2010

R T

Mkr1 2.374 8 GHz
43.70 dBμV

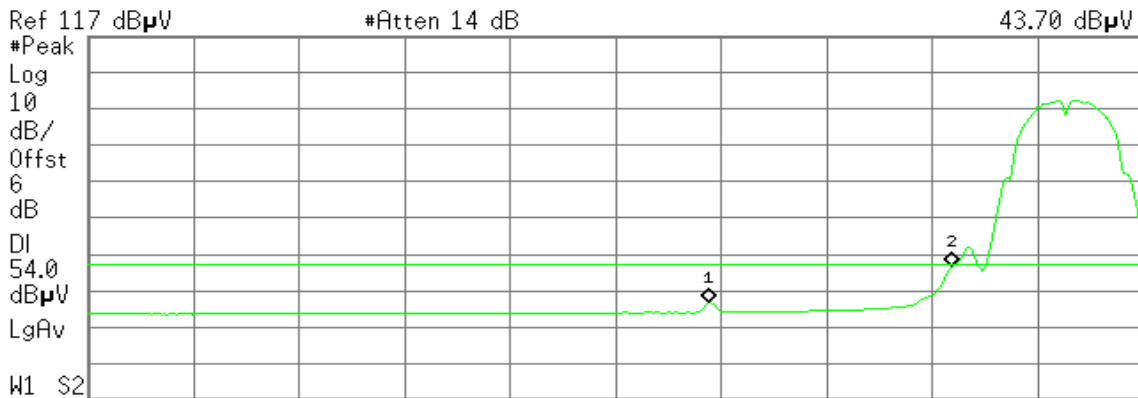

#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.374 8 GHz	43.70 dBμU
2	(1)	Freq	2.400 0 GHz	53.61 dBμU




Detector mode: Peak

Polarity: Horizontal

Agilent 18:10:30 Oct 6, 2010

R T

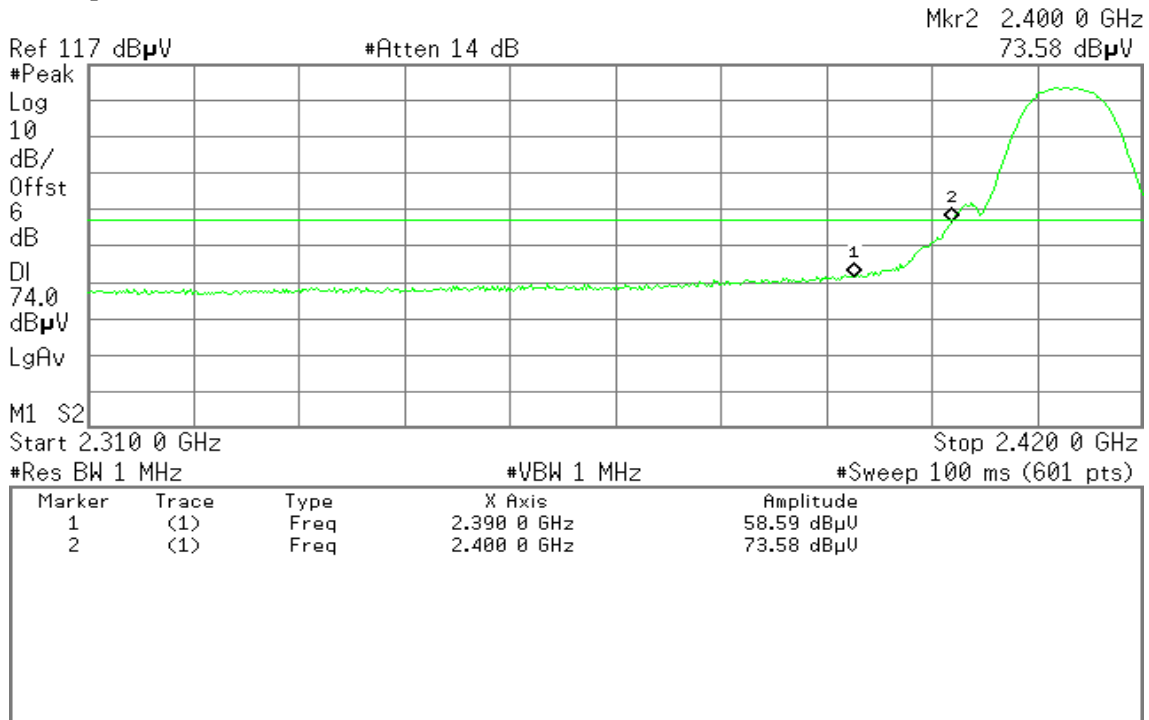


Detector mode: Average

Polarity: Horizontal

Agilent 18:06:37 Oct 6, 2010

R T

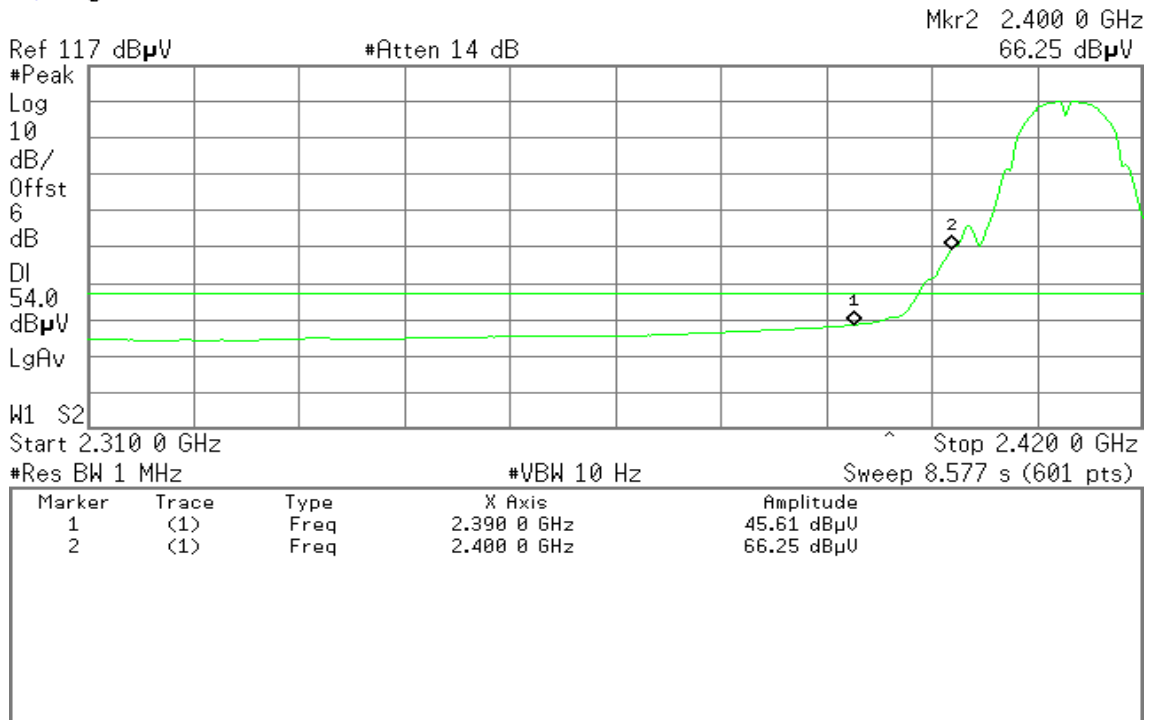



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 18:44:35 Oct 6, 2010

T

Mkr1 2.500 00 GHz
59.19 dB μ V

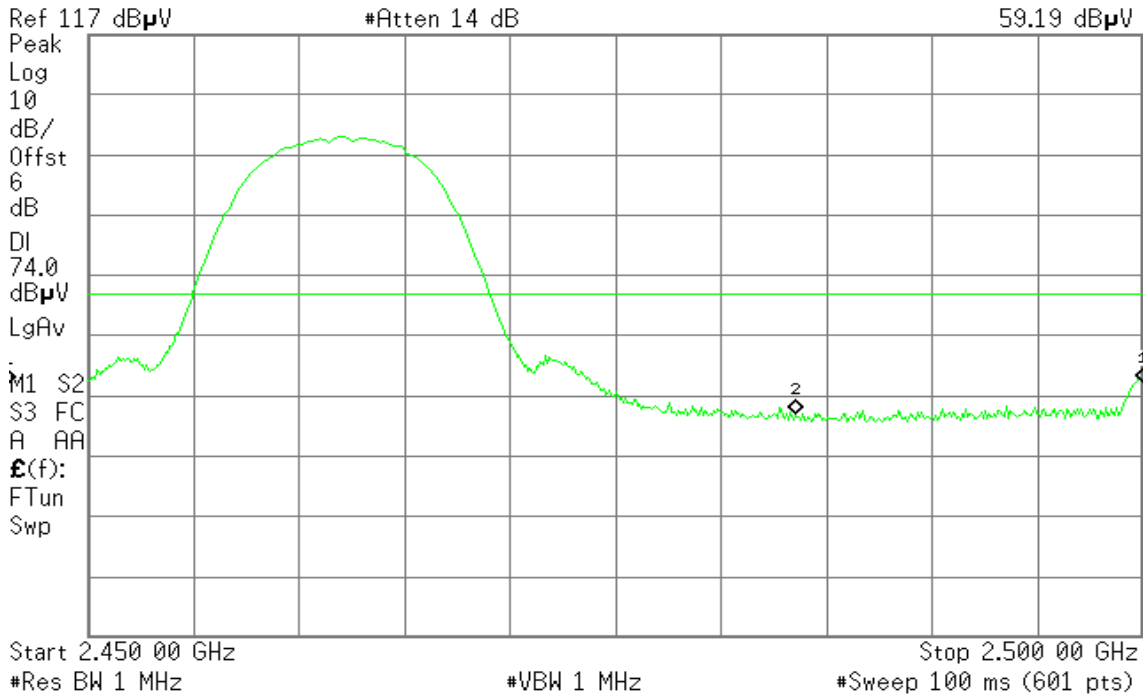


Detector mode: Average

Polarity: Vertical

Agilent 18:44:10 Oct 6, 2010

T

Mkr1 2.500 00 GHz
50.48 dB μ V

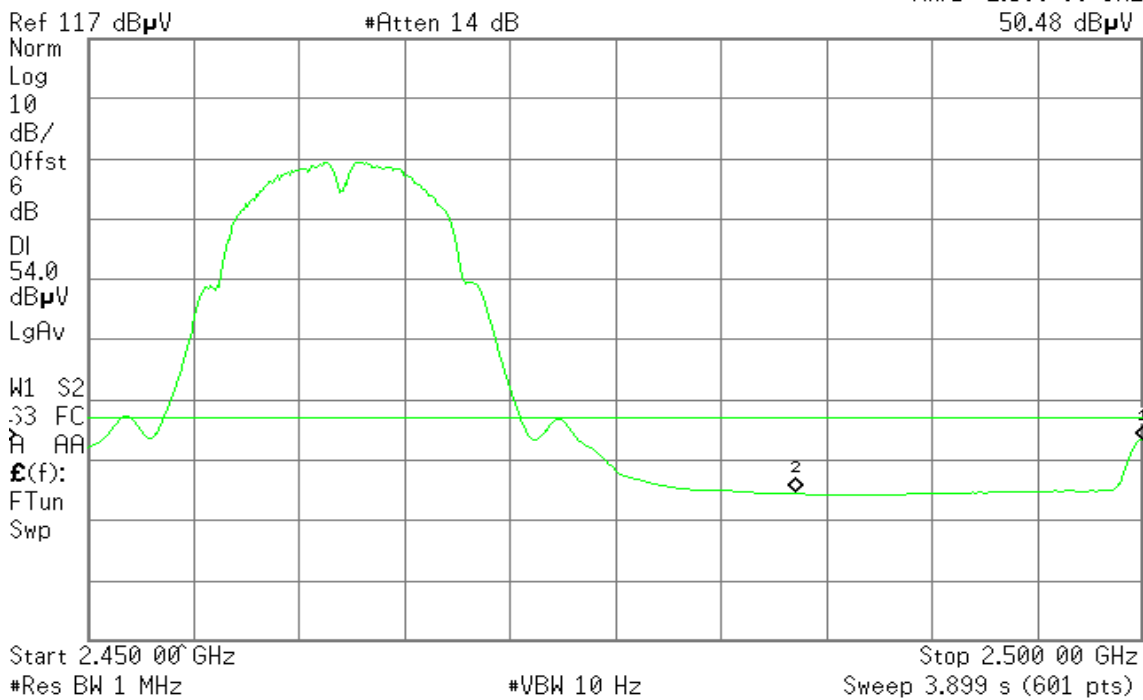




Detector mode: Peak

Polarity: Horizontal

Agilent 18:50:05 Oct 6, 2010

T

Mkr1 2.500 00 GHz
59.00 dB μ V

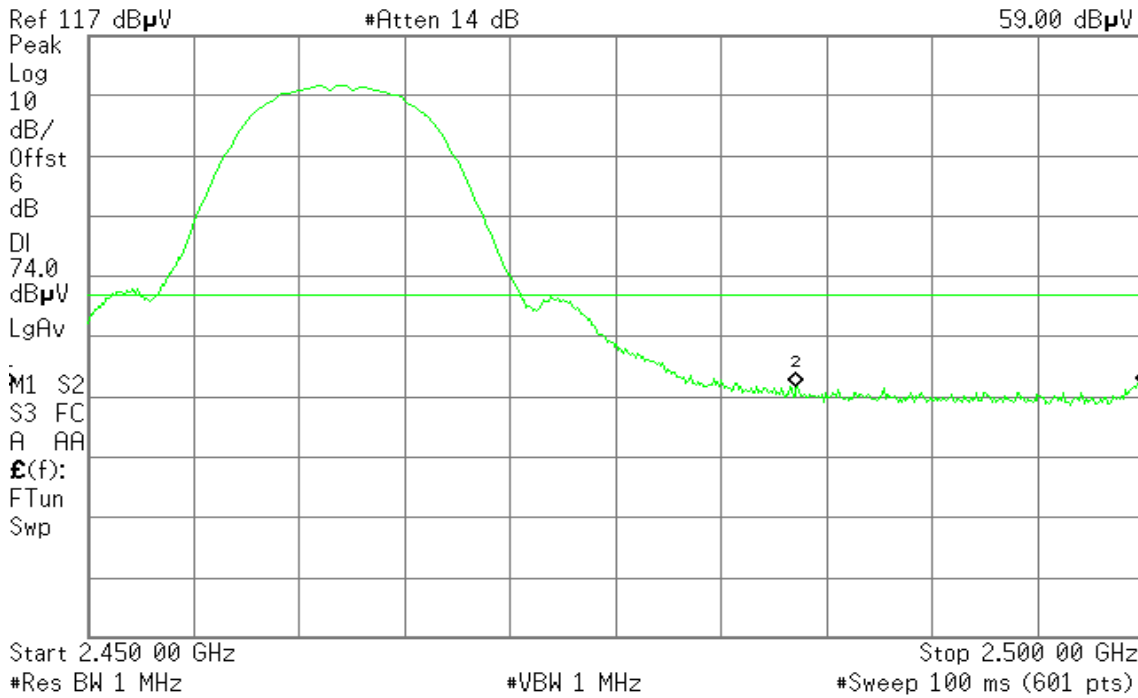


Detector mode: Average

Polarity: Horizontal

Agilent 18:49:38 Oct 6, 2010

T

Mkr1 2.500 00 GHz
50.27 dB μ V

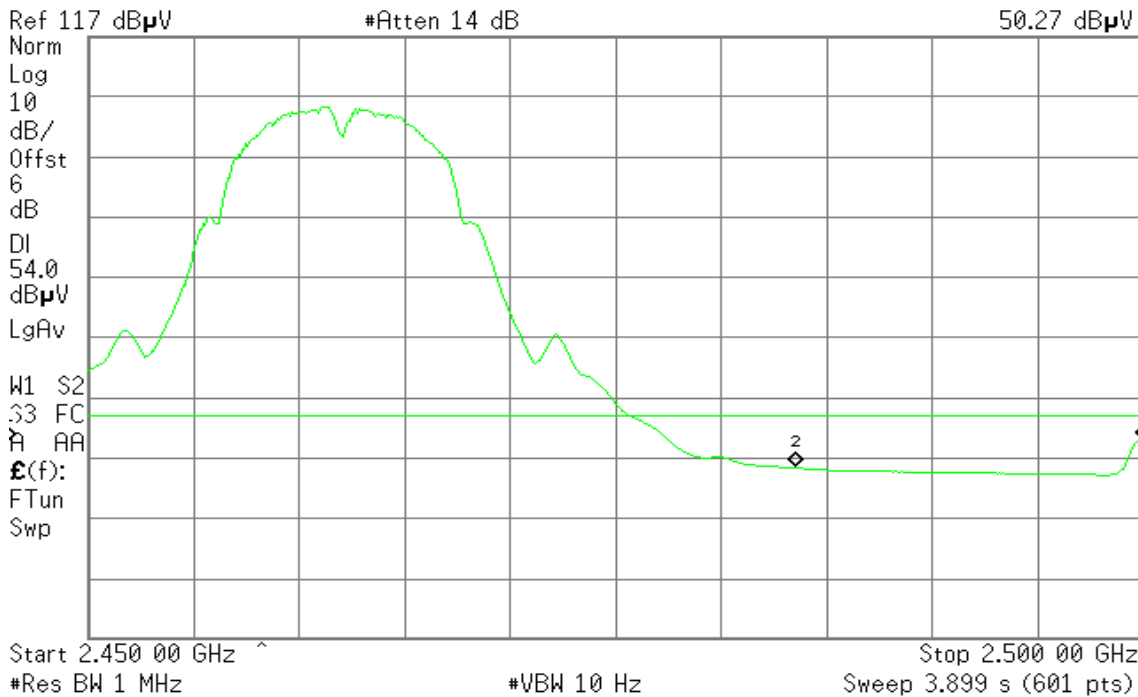



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 11:05:44 Oct 6, 2010

R T

Mkr1 2.390 0 GHz
58.03 dB μ V

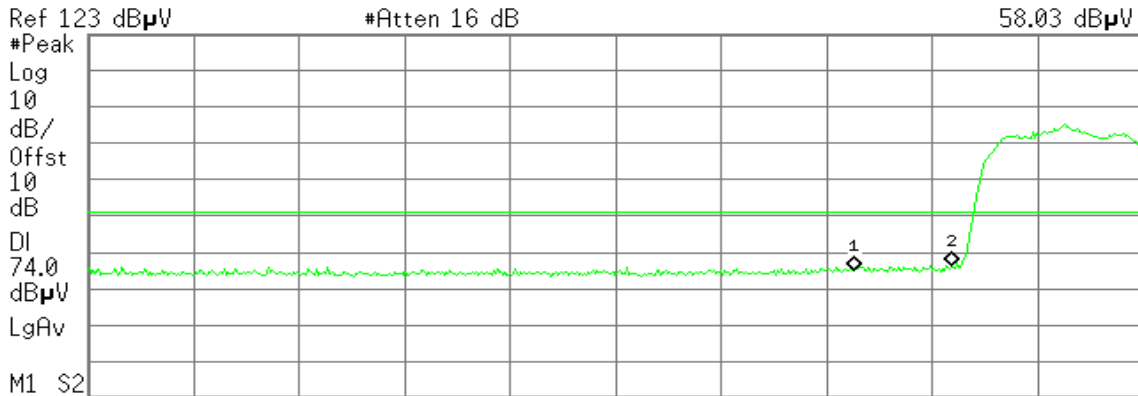

Start 2.310 0 GHz Stop 2.420 0 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	58.03 dB μ U
2	(1)	Freq	2.400 0 GHz	59.47 dB μ U


Detector mode: Average

Polarity: Vertical

Agilent 11:03:55 Oct 6, 2010

R T

Mkr1 2.390 0 GHz
45.73 dB μ V

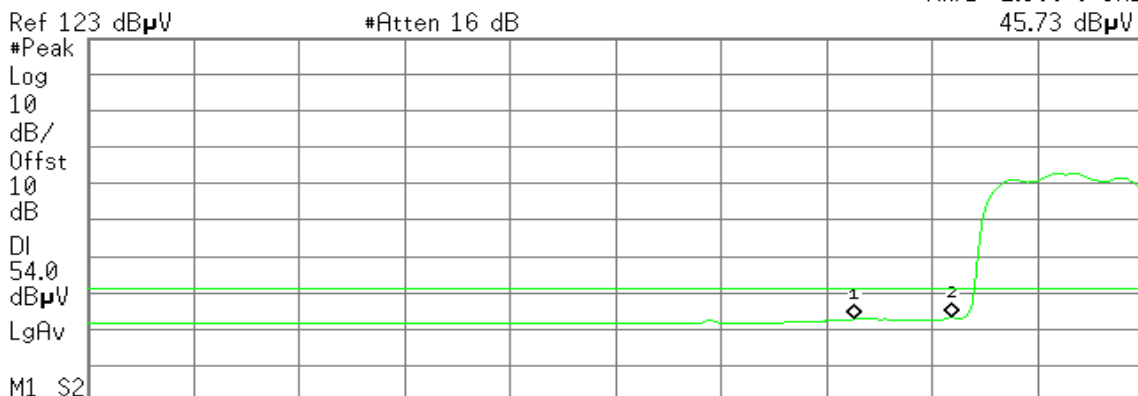

Start 2.310 0 GHz Stop 2.420 0 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	45.73 dB μ U
2	(1)	Freq	2.400 0 GHz	46.23 dB μ U




Detector mode: Peak

Polarity: Horizontal

Agilent 11:08:16 Oct 6, 2010

R T

Mkr1 2.390 0 GHz
64.23 dBµV

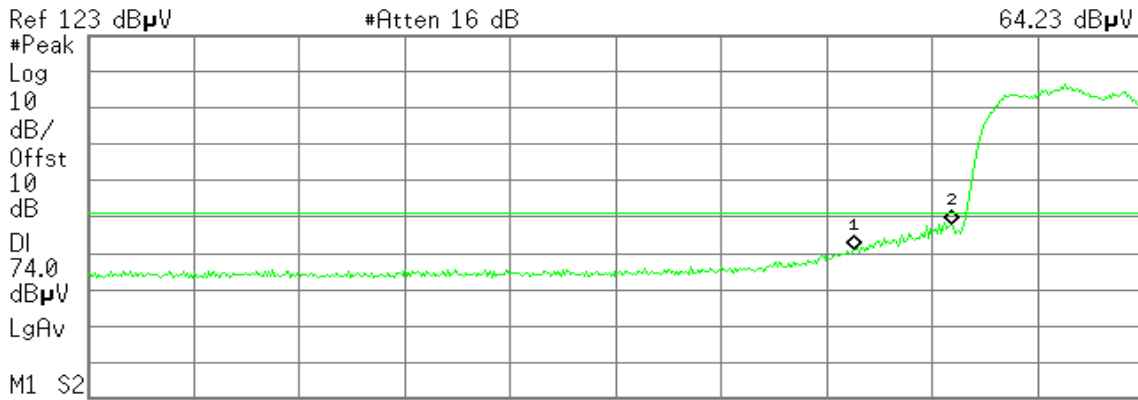

#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	64.23 dBµU
2	(1)	Freq	2.400 0 GHz	70.98 dBµU


Detector mode: Average

Polarity: Horizontal

Agilent 11:08:45 Oct 6, 2010

R T

Mkr1 2.390 0 GHz
51.40 dBµV

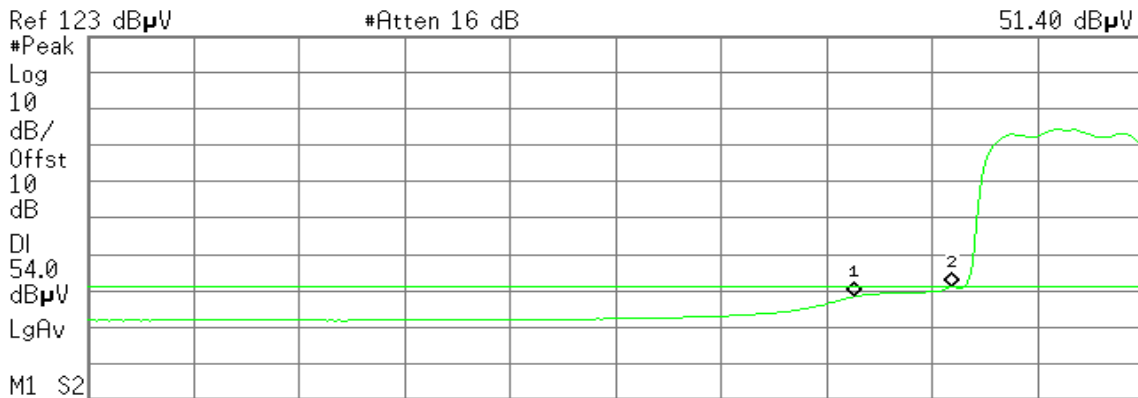

#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	51.40 dBµU
2	(1)	Freq	2.400 0 GHz	54.11 dBµU



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 11:29:29 Oct 6, 2010

R T

Mkr1 2.483 50 GHz
57.55 dBμV

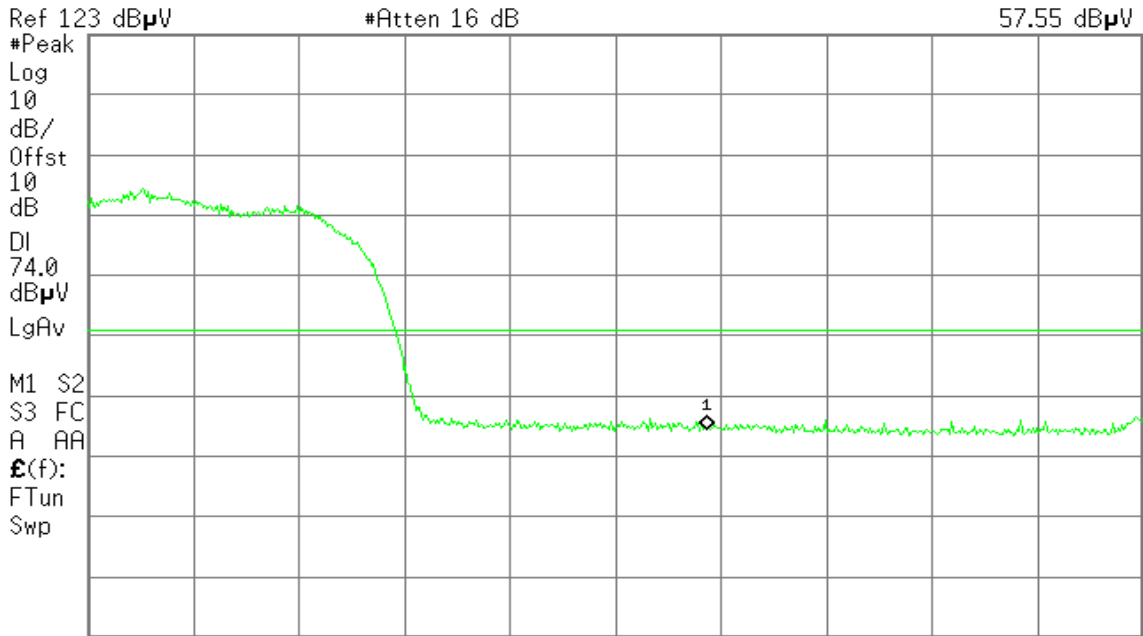

Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 11:30:16 Oct 6, 2010

R T

Mkr1 2.483 50 GHz
45.65 dBμV

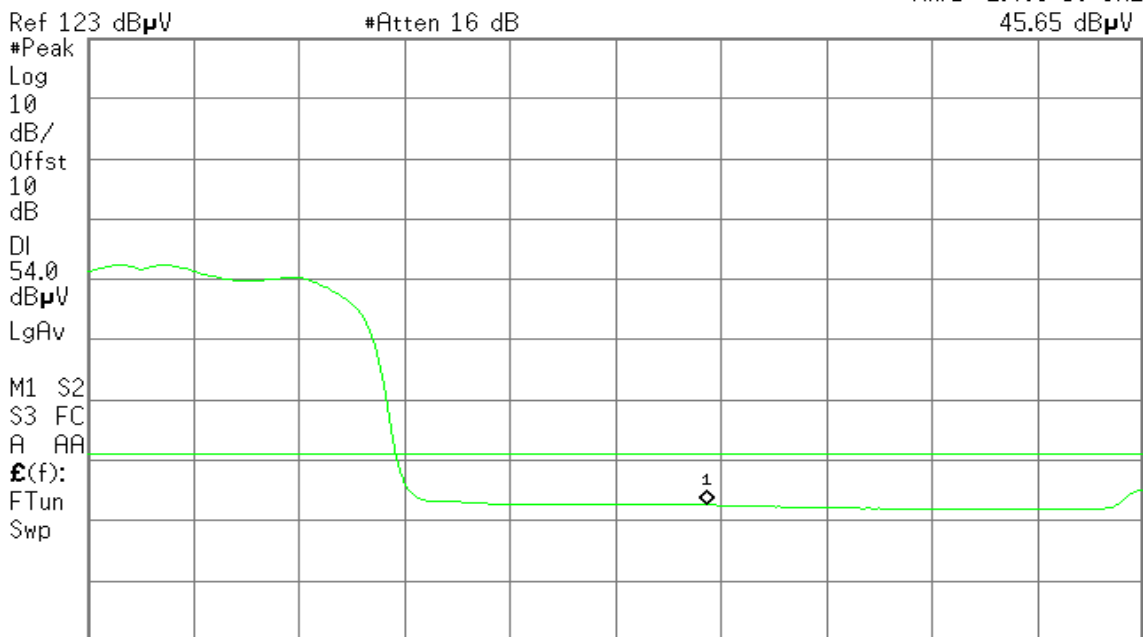

Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 11:22:54 Oct 6, 2010

R T

Mkr1 2.483 50 GHz
64.82 dB μ V

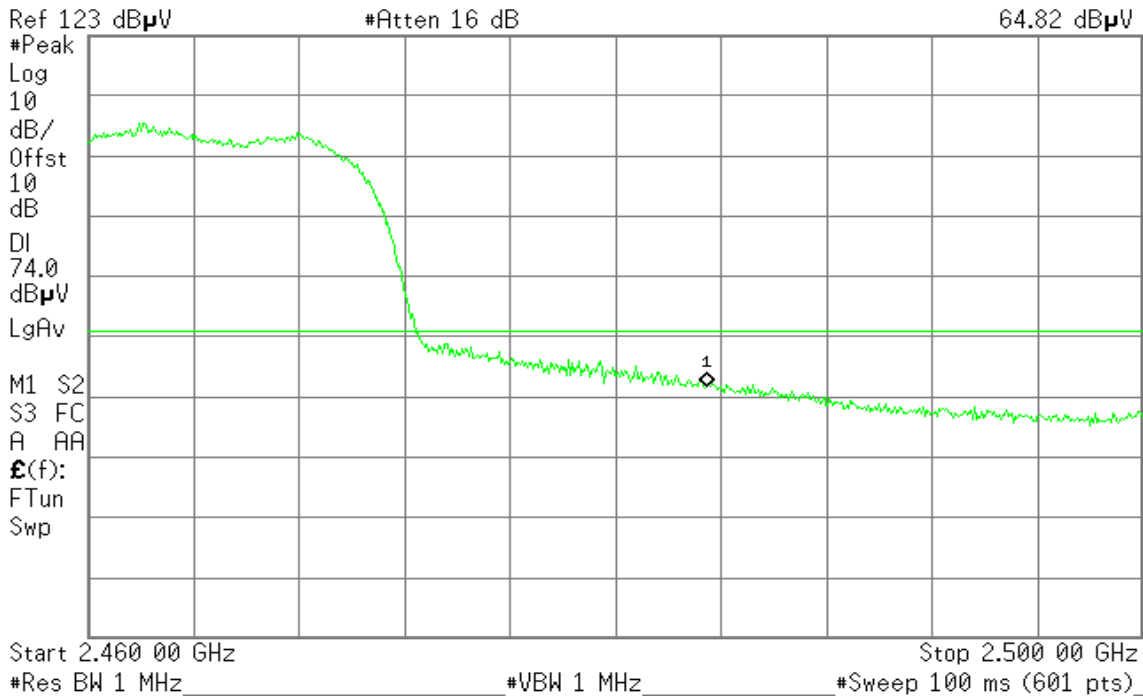


Detector mode: Average

Polarity: Horizontal

Agilent 11:22:03 Oct 6, 2010

R T

Mkr1 2.483 50 GHz
52.35 dB μ V

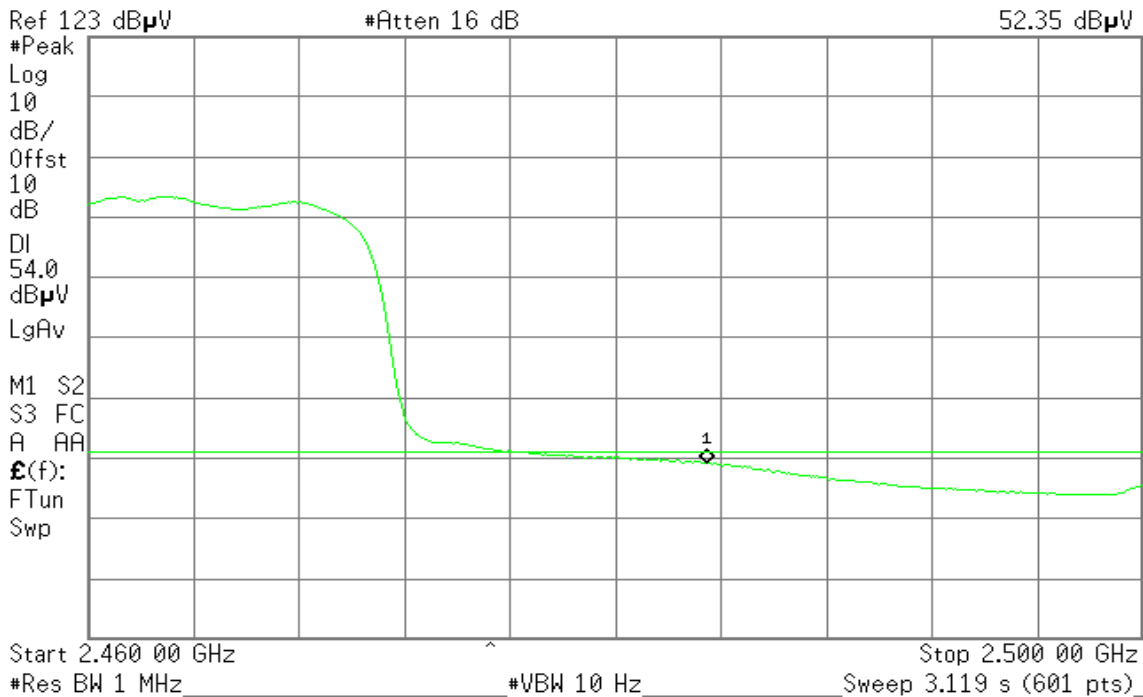




Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 21:01:29 Oct 6, 2010

T

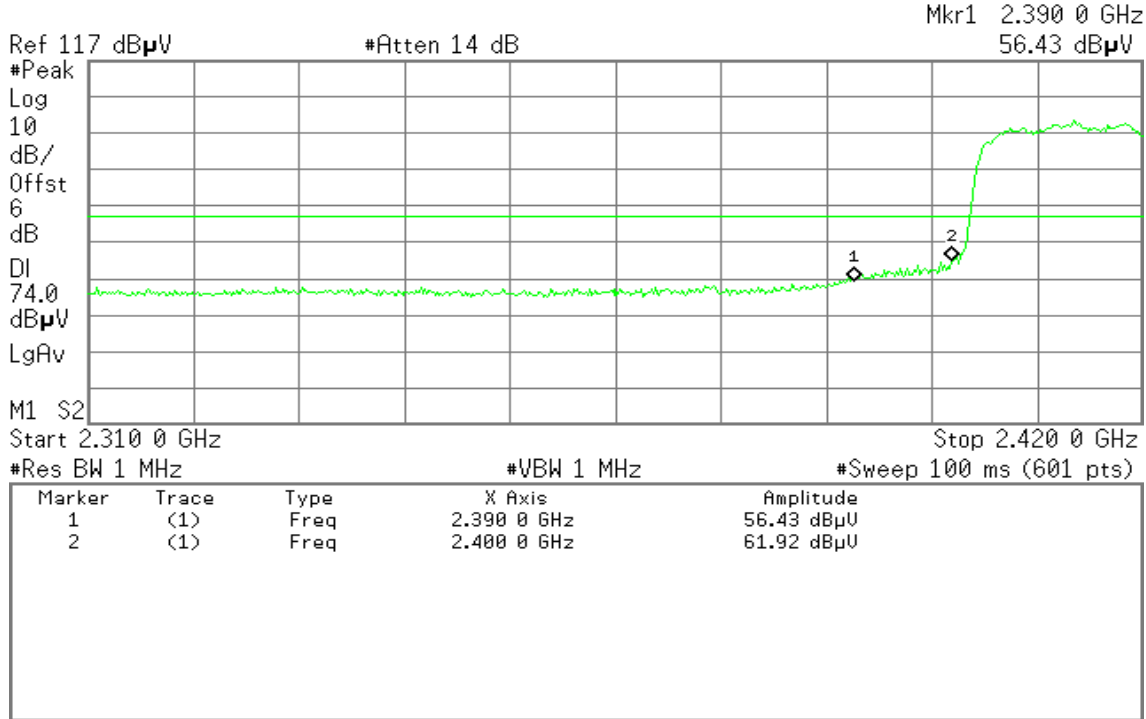


Detector mode: Average

Polarity: Vertical

Agilent 21:00:56 Oct 6, 2010

T

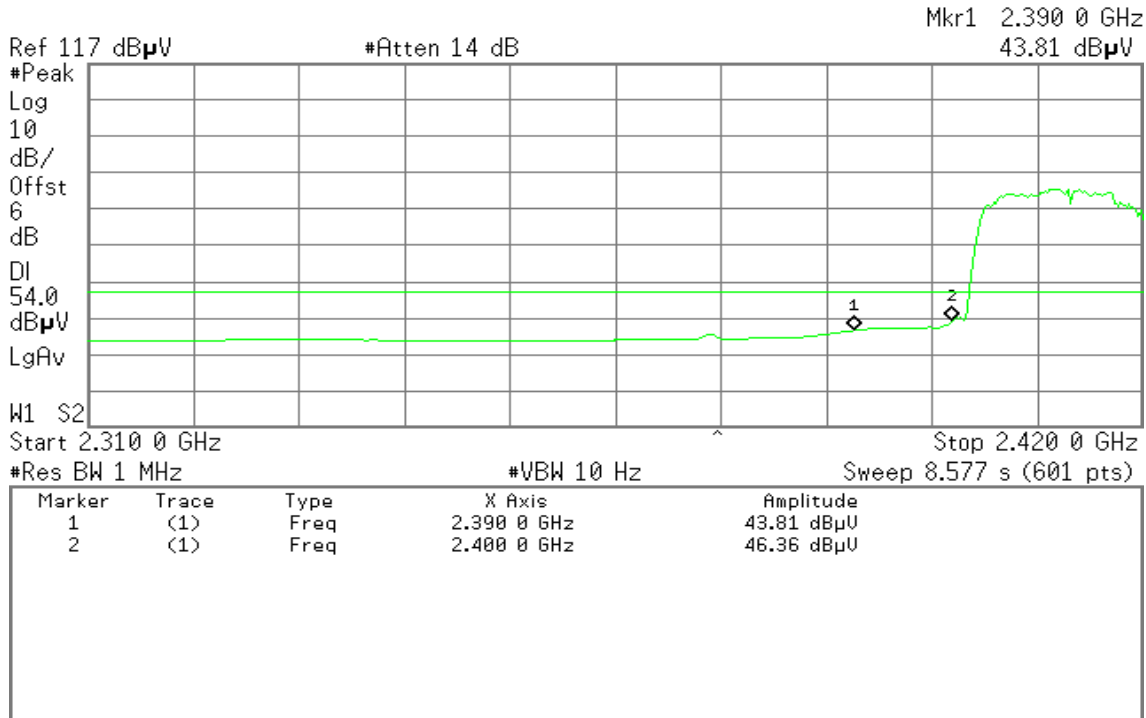




Detector mode: Peak

Polarity: Horizontal

Agilent 20:52:06 Oct 6, 2010

T

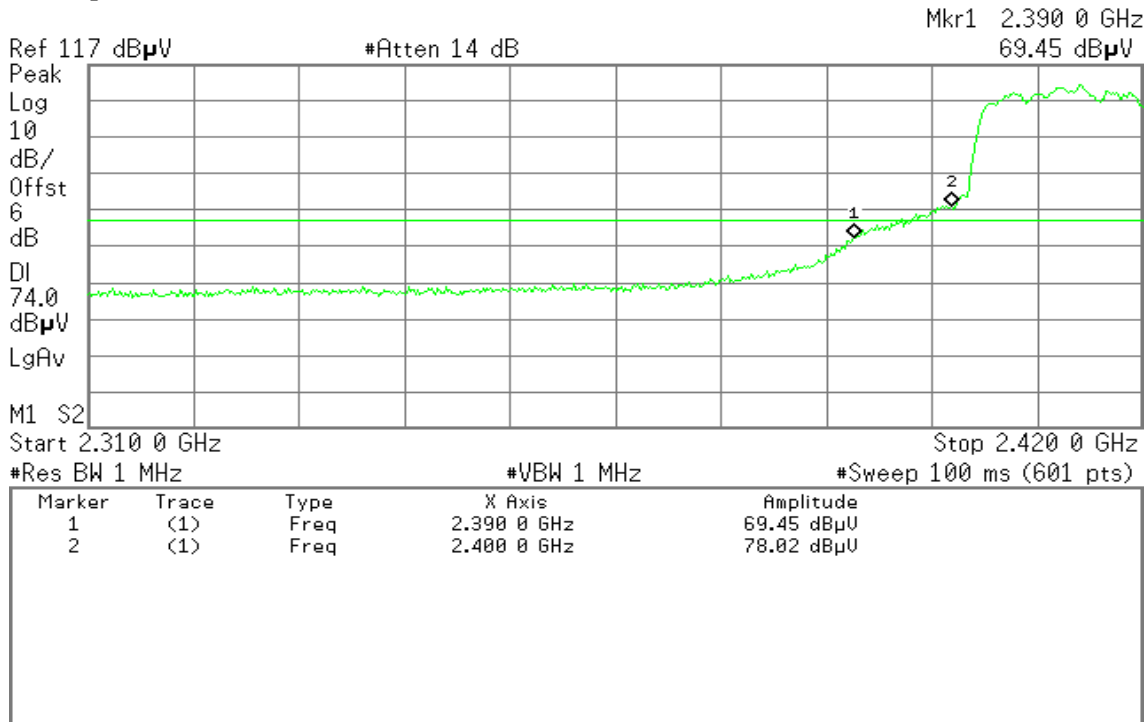


Detector mode: Average

Polarity: Horizontal

Agilent 20:51:13 Oct 6, 2010

T

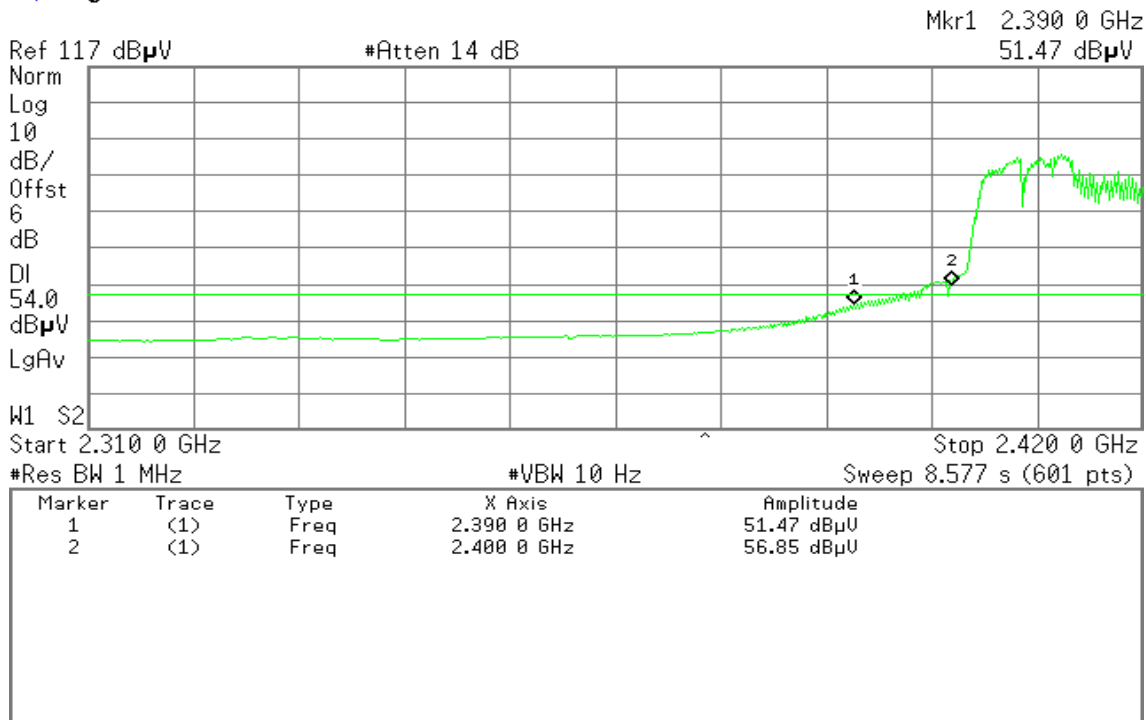



Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 21:50:45 Oct 6, 2010

T

Mkr1 2.500 00 GHz
57.18 dB μ V

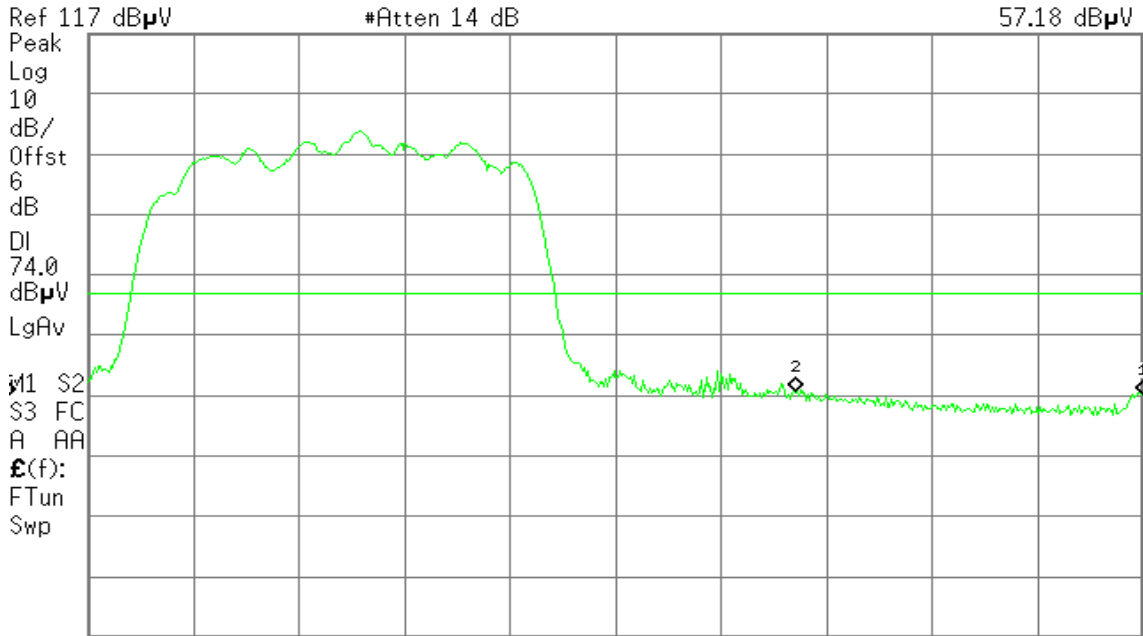

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:49:33 Oct 6, 2010

T

Mkr1 2.500 00 GHz
46.14 dB μ V

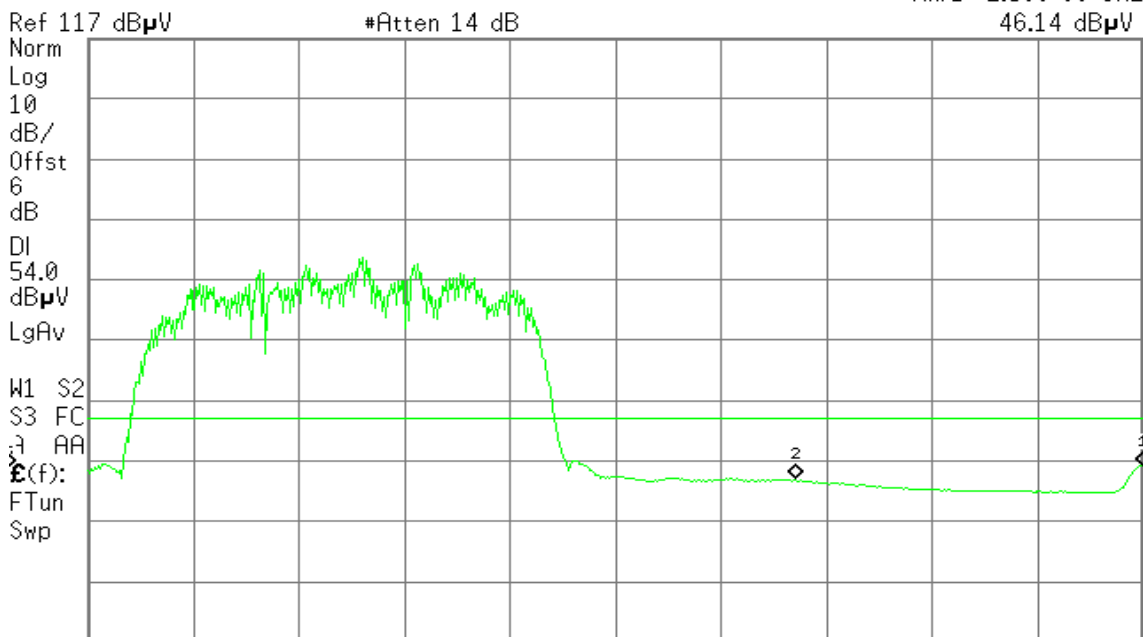

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 21:43:27 Oct 6, 2010

T

Mkr1 2.500 00 GHz
60.57 dB μ V

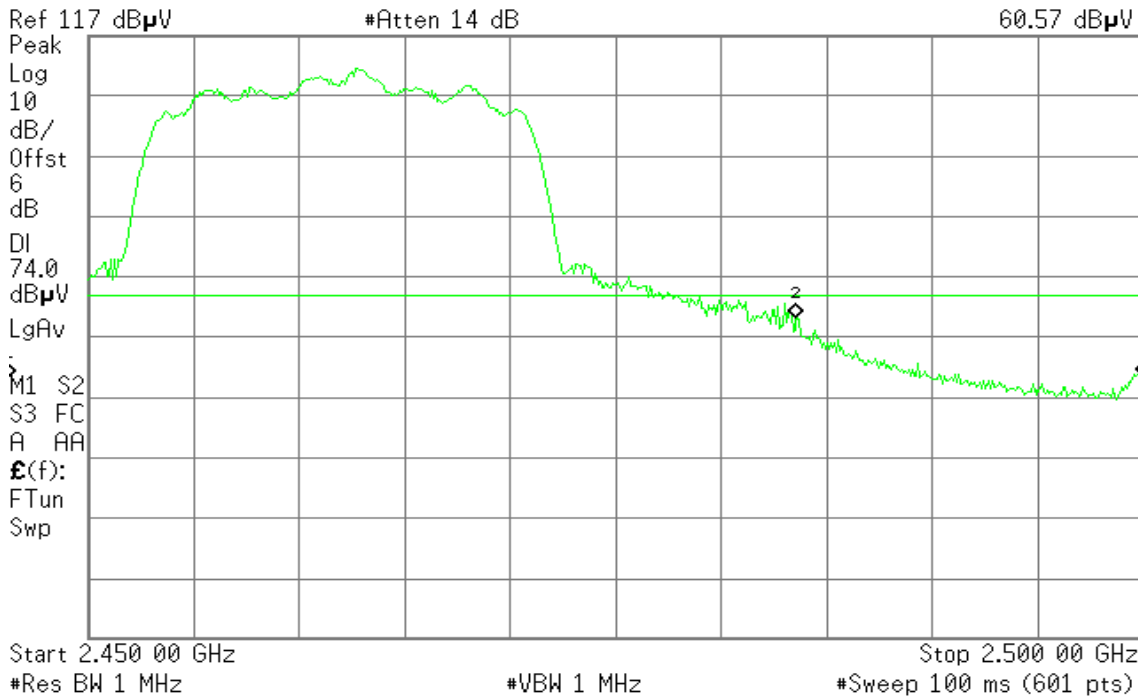


Detector mode: Average

Polarity: Horizontal

Agilent 21:42:47 Oct 6, 2010

T

Mkr1 2.500 00 GHz
53.38 dB μ V

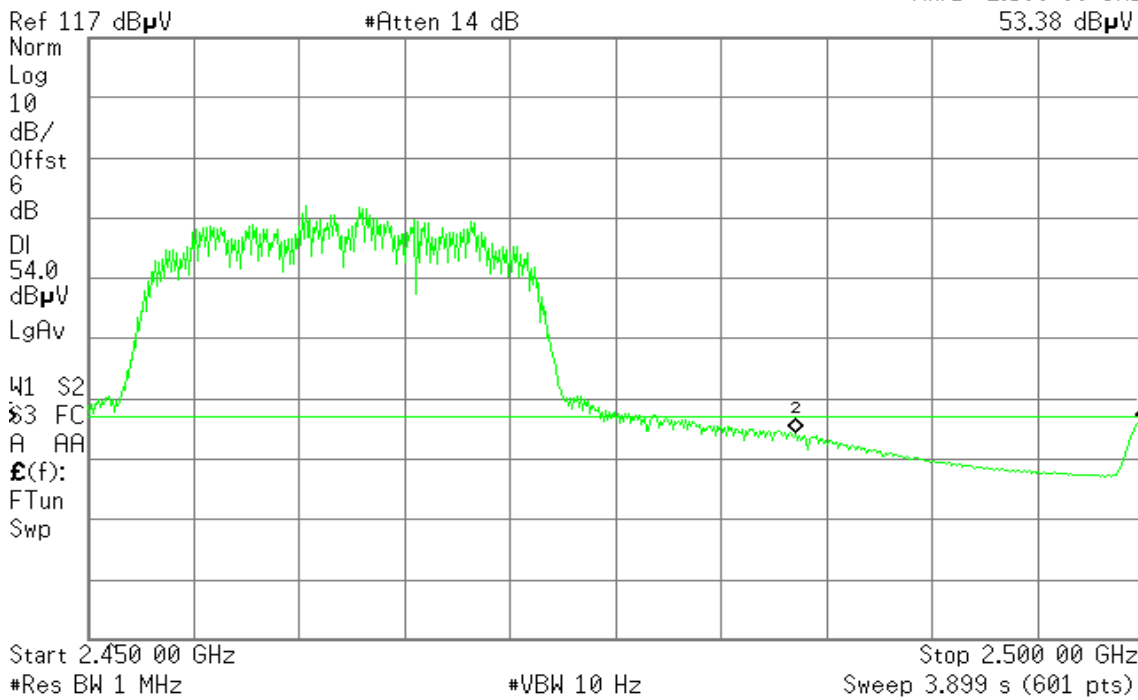



Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 23:49:51 Oct 6, 2010

R T

Mkr1 2.375 0 GHz
55.10 dBµV

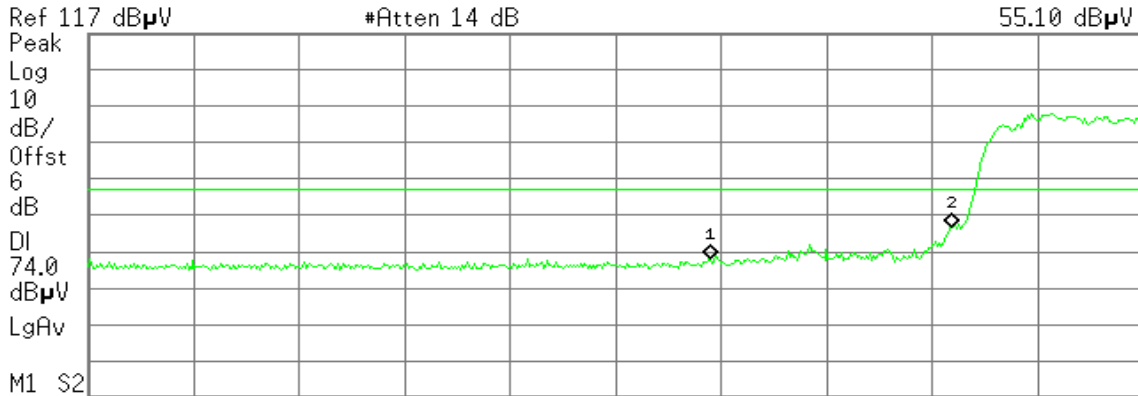

Start 2.310 0 GHz Stop 2.420 0 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.375 0 GHz	55.10 dBµU
2	(1)	Freq	2.400 0 GHz	63.69 dBµU


Detector mode: Average

Polarity: Vertical

Agilent 23:49:16 Oct 6, 2010

R T

Mkr1 2.375 0 GHz
42.62 dBµV

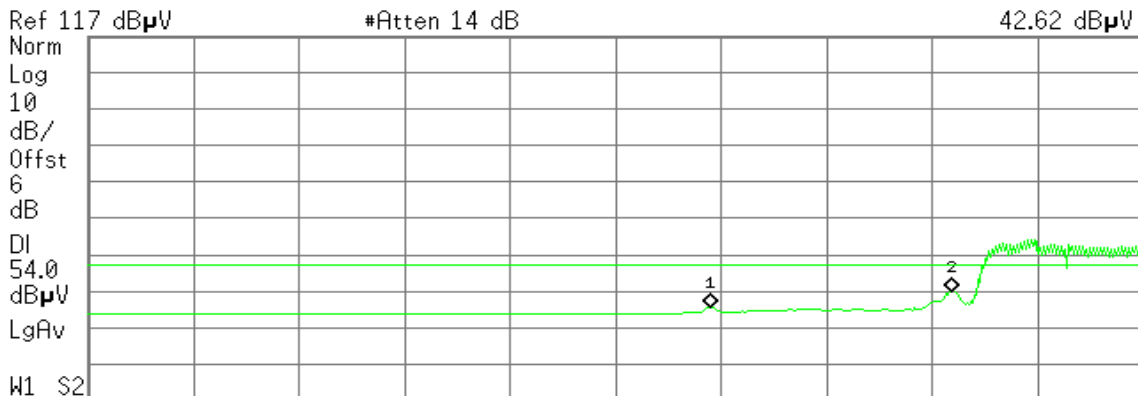

Start 2.310 0 GHz Stop 2.420 0 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.375 0 GHz	42.62 dBµU
2	(1)	Freq	2.400 0 GHz	46.69 dBµU




Detector mode: Peak

Polarity: Horizontal

Agilent 23:42:31 Oct 6, 2010

R T

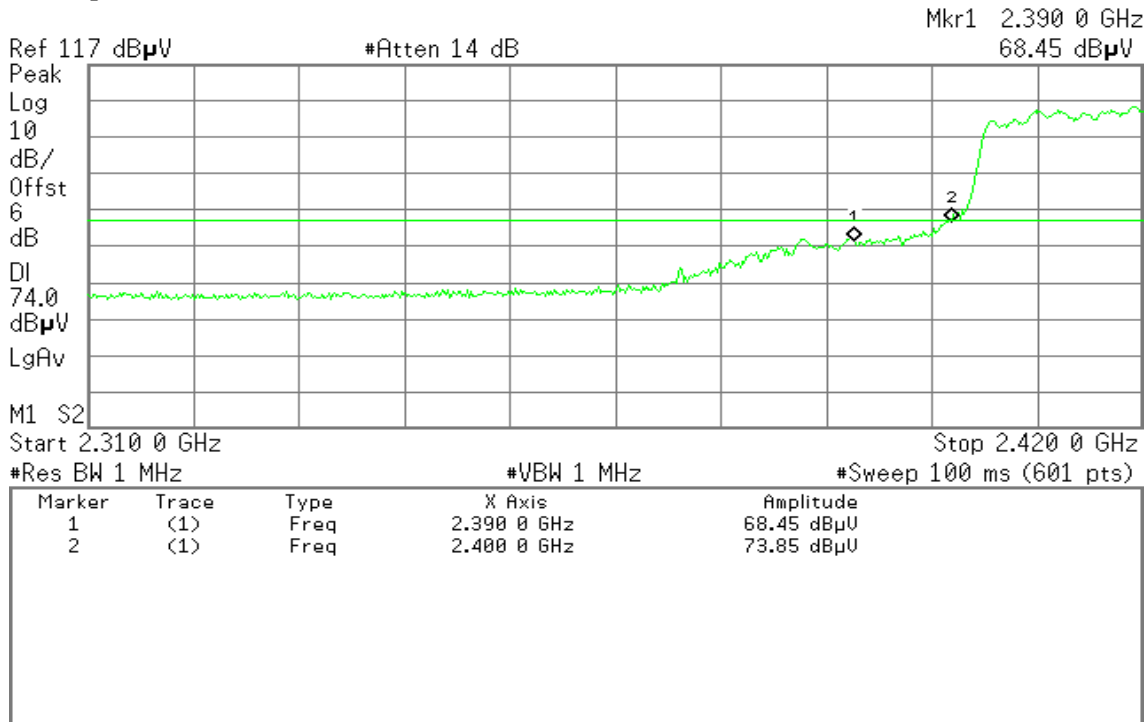


Detector mode: Average

Polarity: Horizontal

Agilent 23:43:21 Oct 6, 2010

R T

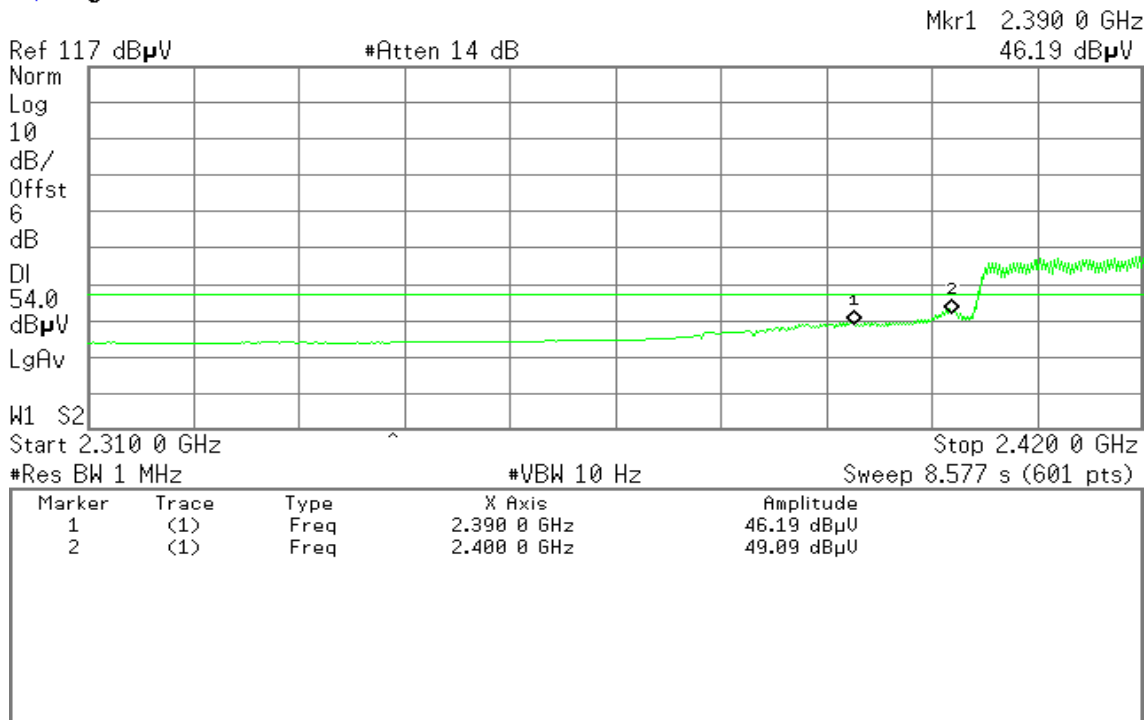



Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 00:07:52 Oct 7, 2010

R T

Mkr1 2.500 00 GHz
60.40 dBμV

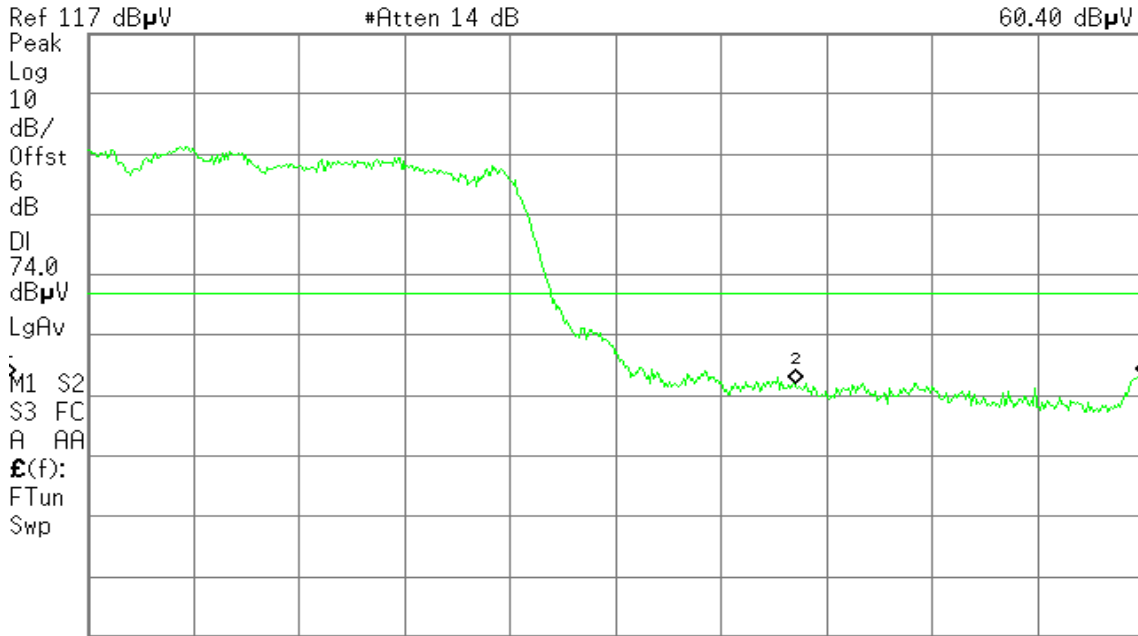

Start 2.450 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 00:07:21 Oct 7, 2010

R T

Mkr1 2.500 00 GHz
52.24 dBμV

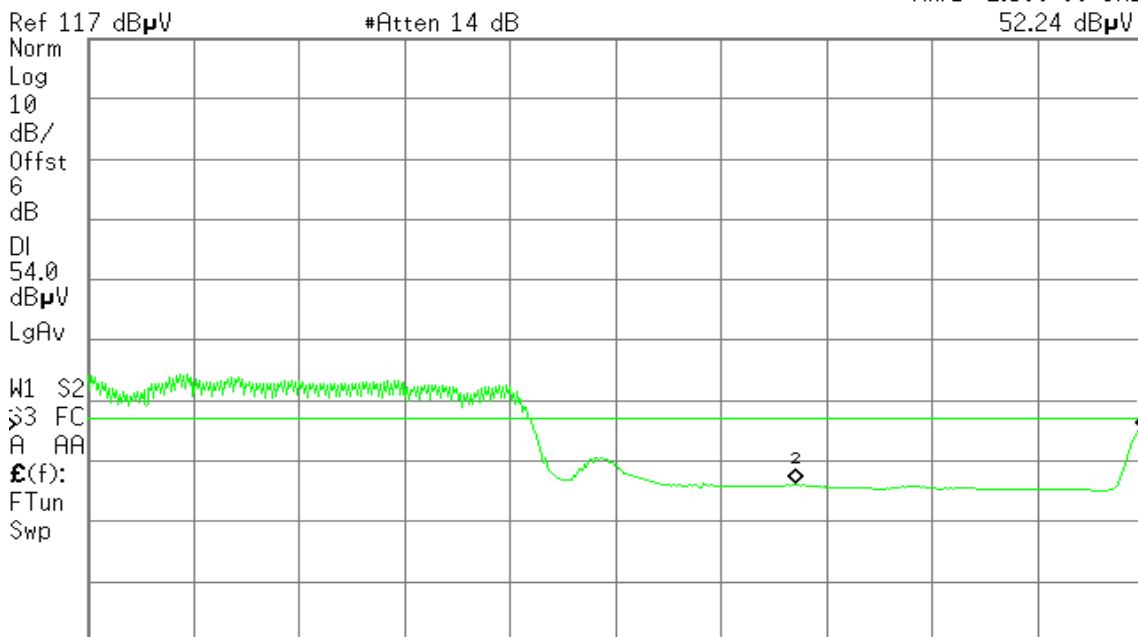

Start 2.450 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 00:00:44 Oct 7, 2010

R T

Mkr1 2.483 50 GHz
72.35 dBμV

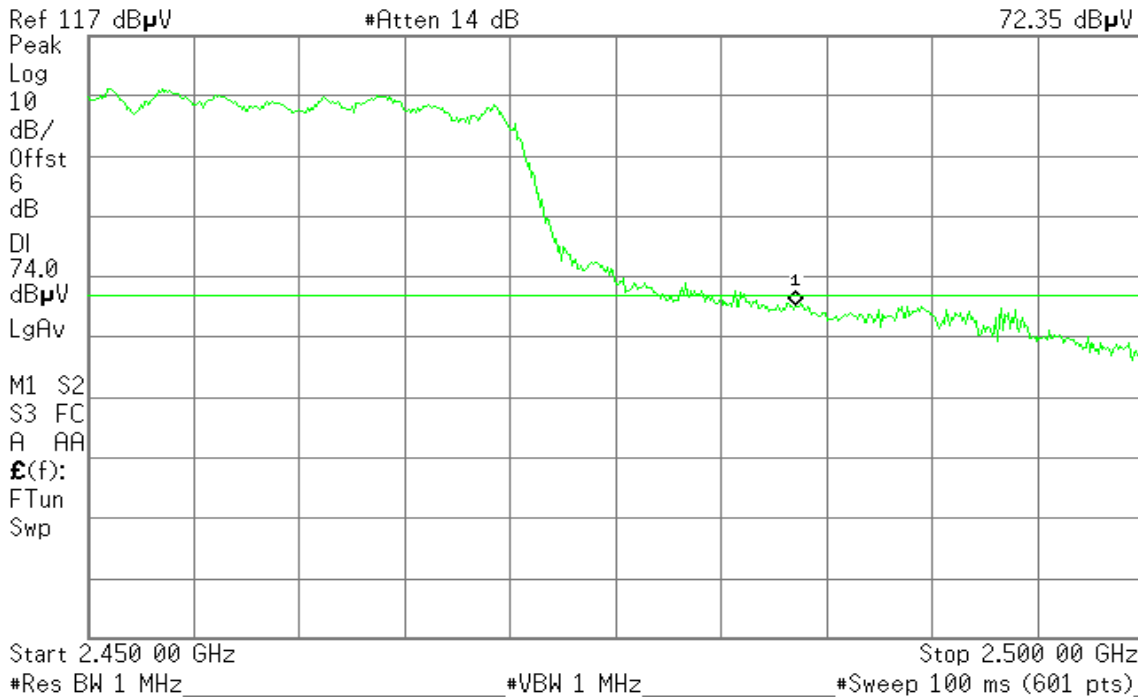


Detector mode: Average

Polarity: Horizontal

Agilent 23:58:59 Oct 6, 2010

R T

Mkr1 2.483 50 GHz
49.86 dBμV

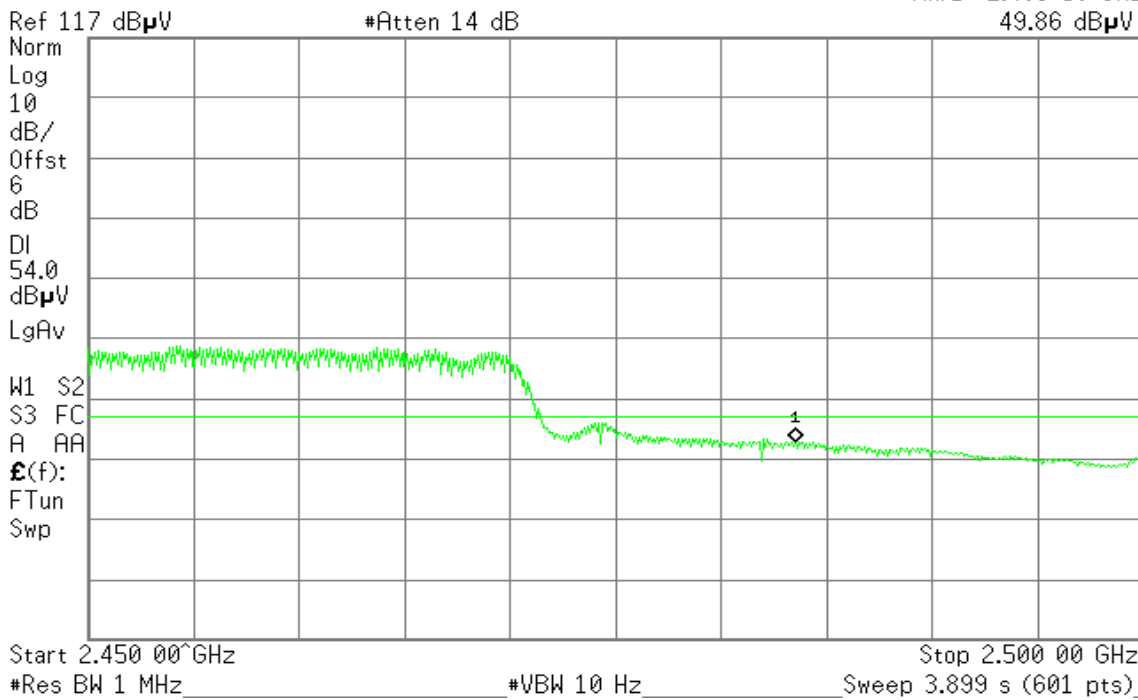




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

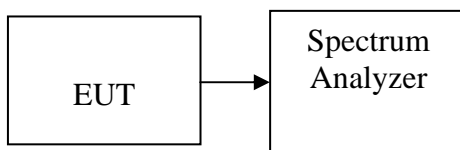

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-7.24	8.00	PASS
Mid	2437	-7.25		PASS
High	2462	-9.20		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.76	8.00	PASS
Mid	2437	-10.06		PASS
High	2462	-15.12		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-13.01	-17.24	-11.62	8.00	PASS
Mid	2437	-10.84	-9.09	-6.87		PASS
High	2462	-13.90	-16.27	-11.91		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-22.32	-23.45	-19.84	8.00	PASS
Mid	2437	-11.87	-11.90	-8.87		PASS
High	2452	-22.29	-18.08	-16.68		PASS

Remark: Total PPSD (dBm) = $10 * \text{LOG}(10^{(\text{Chain 0 PPSD} / 10)} + 10^{(\text{Chain 1 PPSD} / 10)})$



Test mode: IEEE 802.11n HT 20 MHz mode with combiner

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-12.39	8.00	PASS
Mid	2437	-3.46		PASS
High	2462	-11.34		PASS

Test mode: IEEE 802.11n HT 40 MHz mode with combiner

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-14.89	8.00	PASS
Mid	2437	-6.83		PASS
High	2452	-17.26		PASS



Test Plot

IEEE 802.11b mode


PPSD (CH Low)

Agilent 20:23:16 Oct 18, 2010

R T

Mkr1 2.412 791 6 GHz

-7.24 dBm

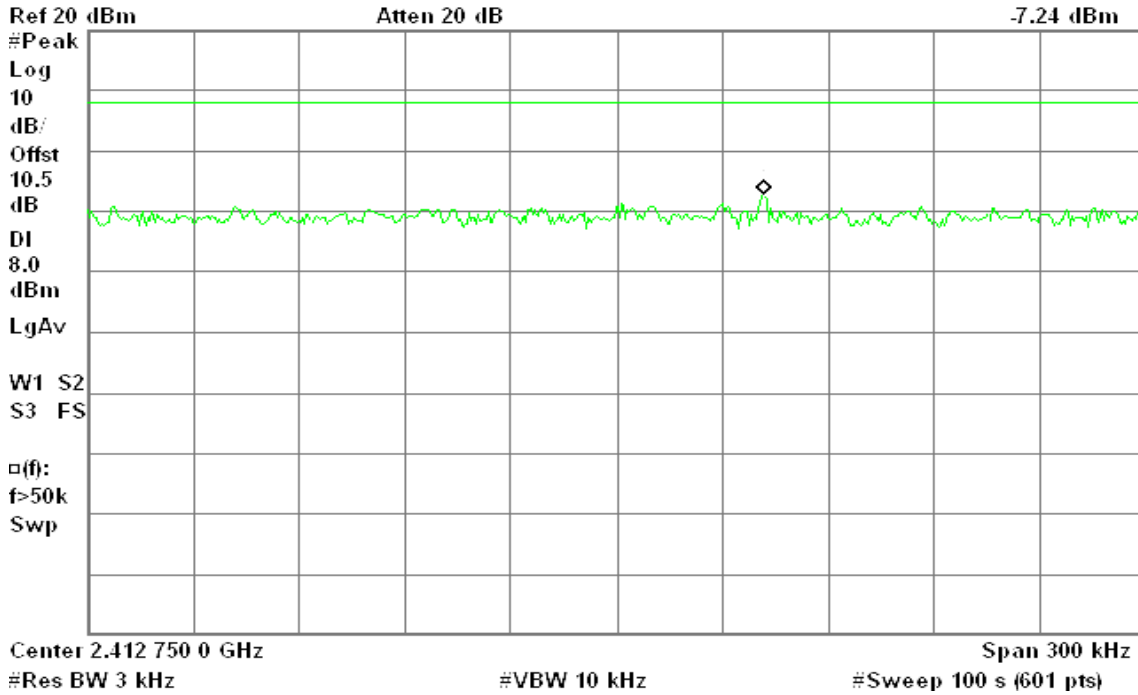


PPSD (CH Mid)

Agilent 20:28:56 Oct 18, 2010

R T

Mkr1 2.437 792 6 GHz

-7.25 dBm

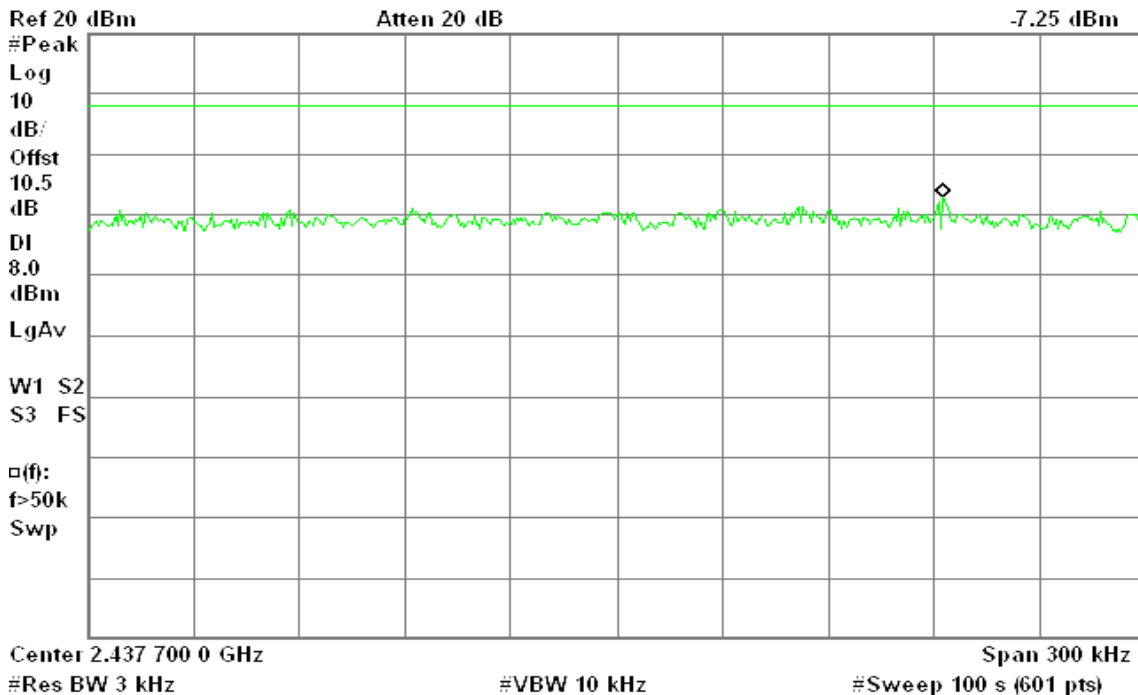




PPSD (CH High)

Agilent 20:32:41 Oct 18, 2010

R T

Mkr1 2.463 793 0 GHz
-9.20 dBm

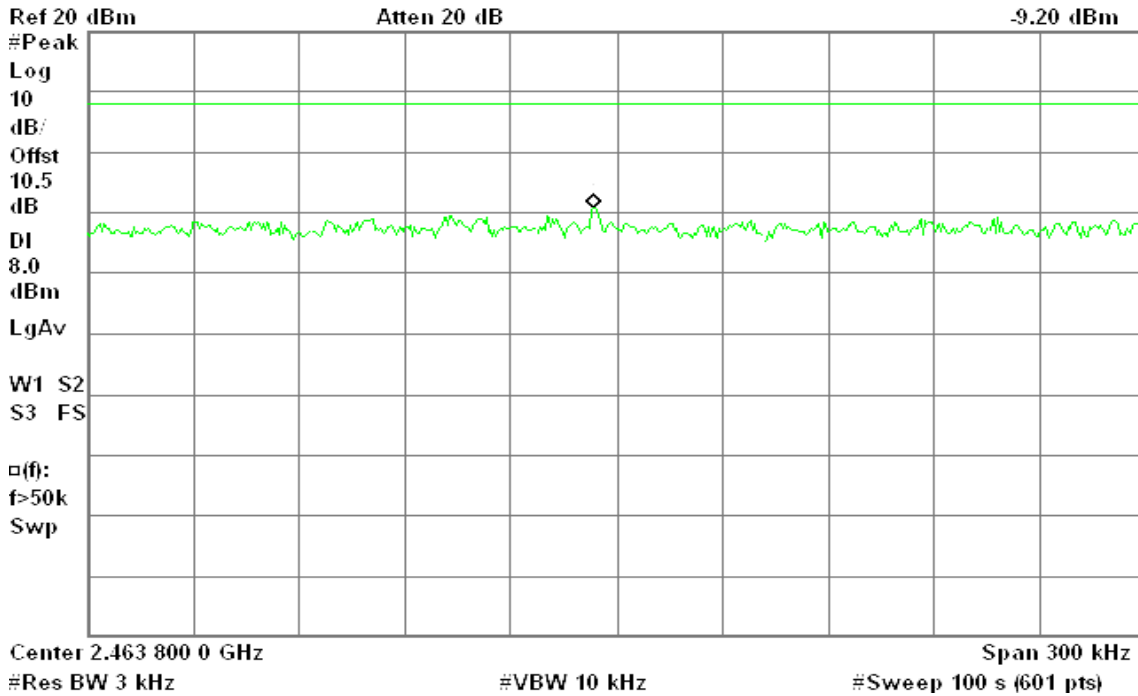


IEEE 802.11g mode

PPSD (CH Low)

Agilent 20:36:21 Oct 18, 2010

R T

Mkr1 2.412 331 1 GHz
-14.76 dBm

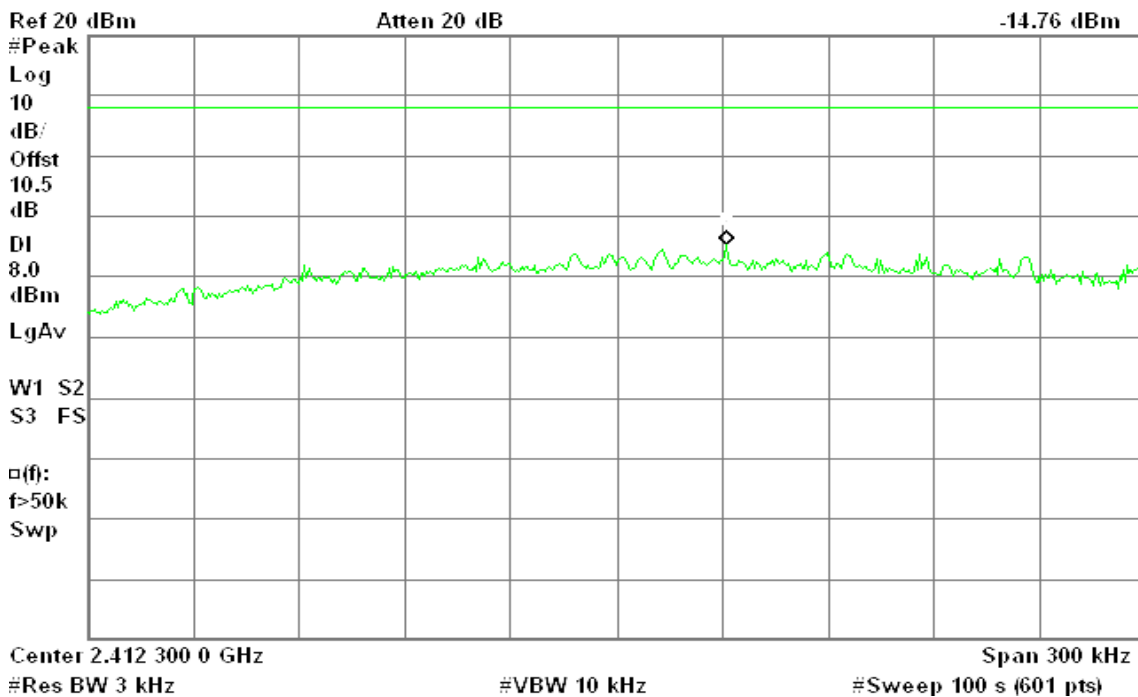




PPSD (CH Mid)

Agilent 20:40:44 Oct 18, 2010

R T

Mkr1 2.434 512 0 GHz

-10.06 dBm

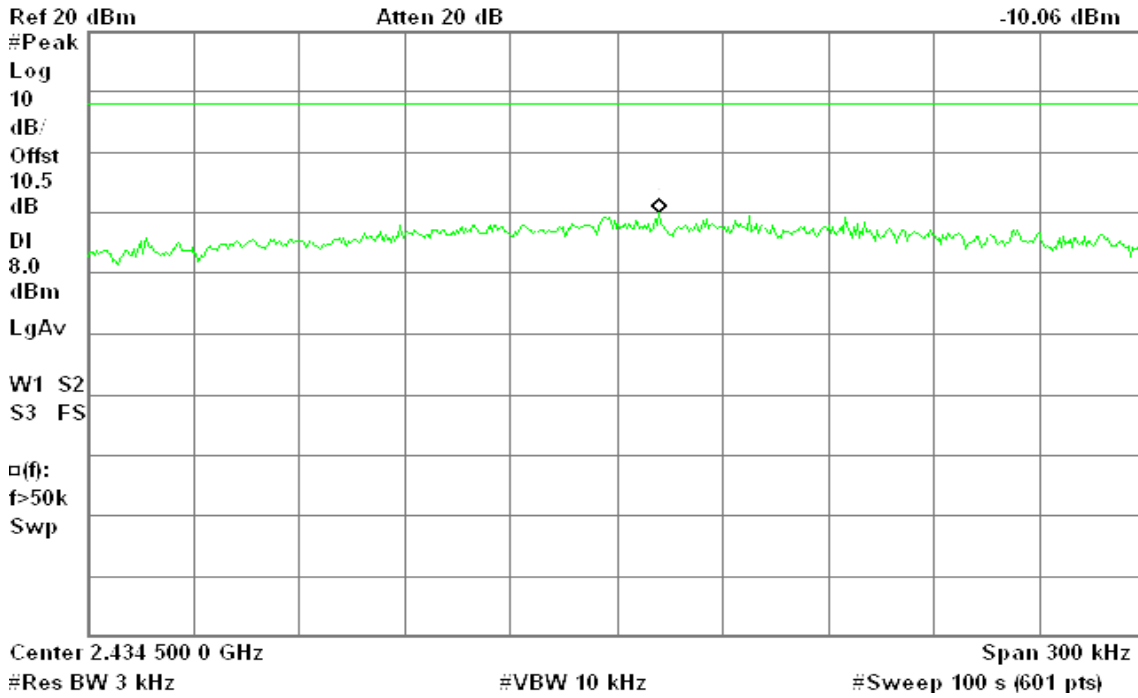


PPSD (CH High)

Agilent 20:44:19 Oct 18, 2010

R T

Mkr1 2.462 666 9 GHz

-15.12 dBm

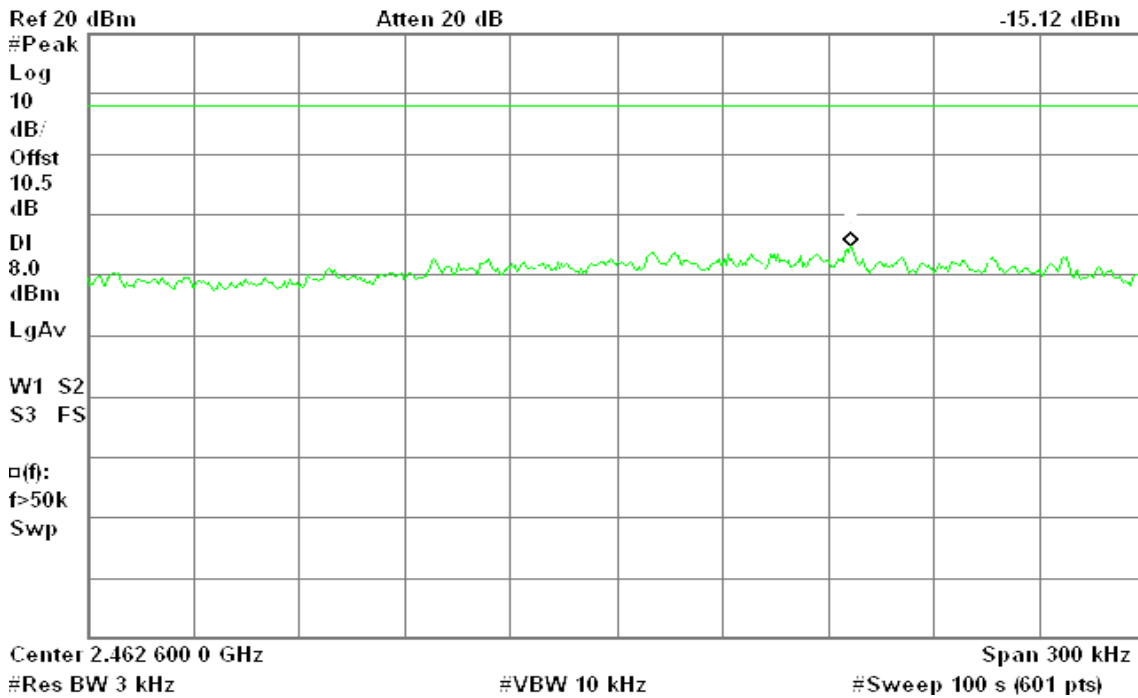




IEEE 802.11n HT 20 MHz mode / Chain 0

PPSD (CH Low)

Agilent 20:49:48 Oct 18, 2010

R T

Mkr1 2.411 328 6 GHz
-13.01 dBm

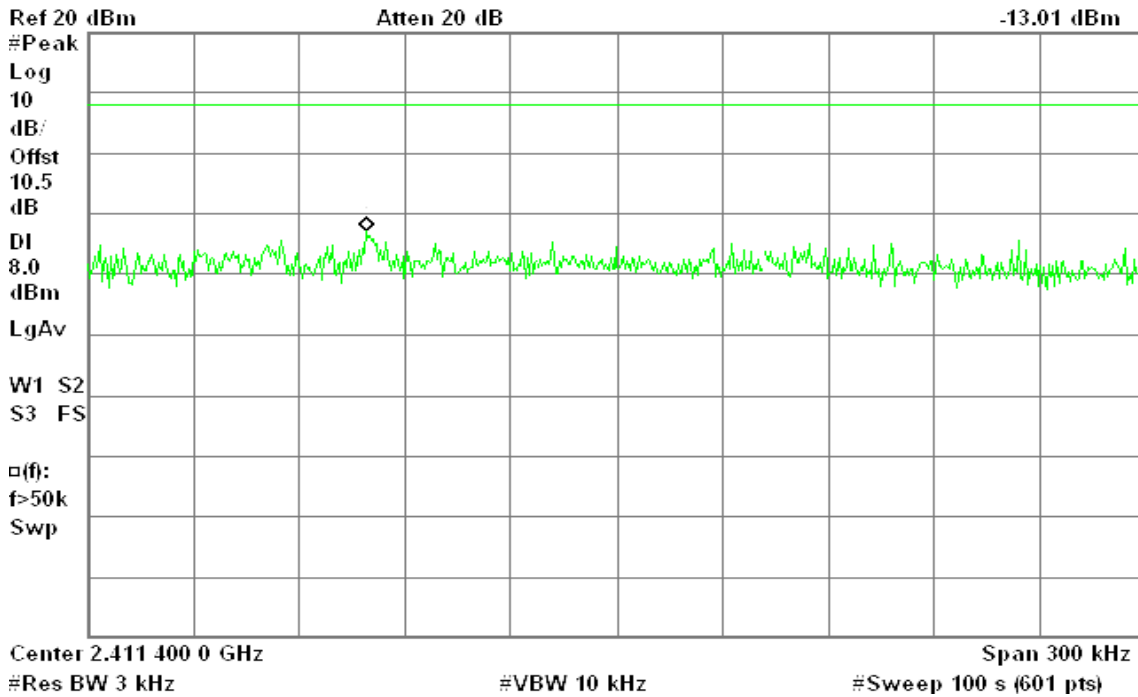


PPSD (CH Mid)

Agilent 20:54:17 Oct 18, 2010

R T

Mkr1 2.443 901 0 GHz
-10.84 dBm

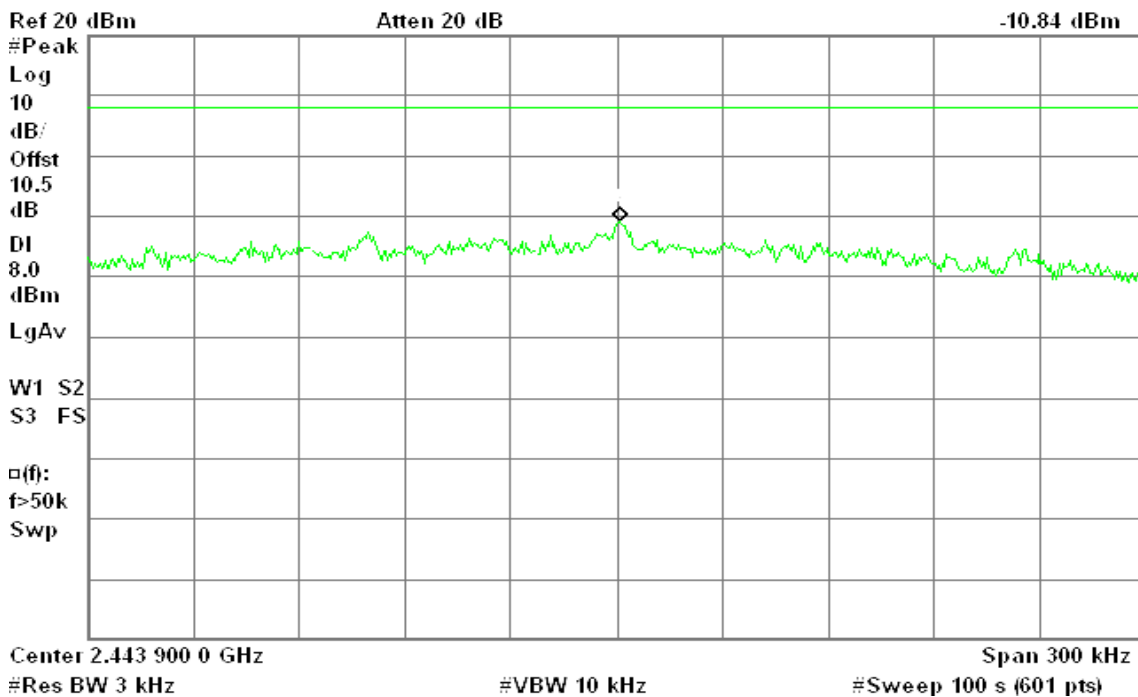




PPSD (CH High)

Agilent 20:58:35 Oct 18, 2010

R T

Mkr1 2.462 698 9 GHz
-13.90 dBm

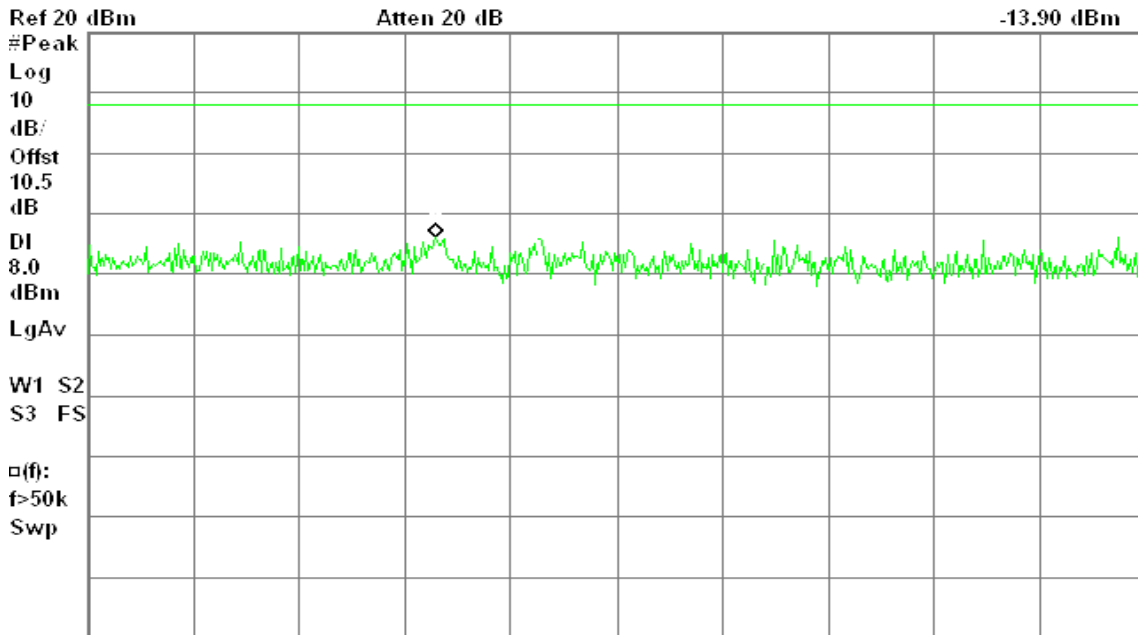

Center 2.462 750 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


IEEE 802.11n HT 20 MHz mode / Chain 1

PPSD (CH Low)

Agilent 21:11:12 Oct 18, 2010

R T

Mkr1 2.413 589 0 GHz
-17.24 dBm

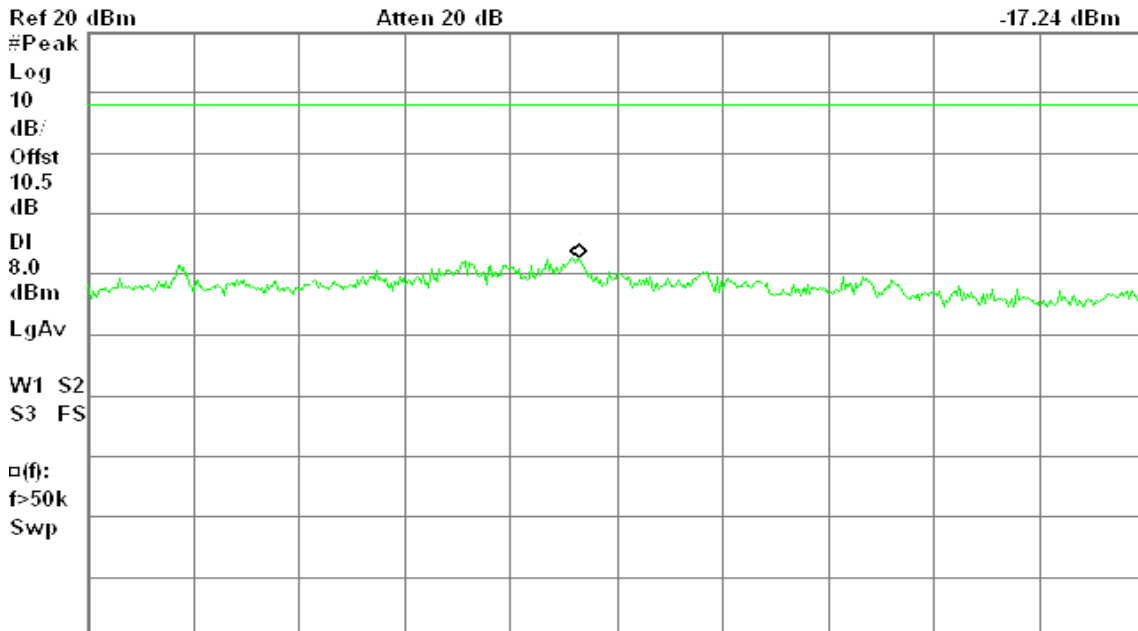

Center 2.413 600 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




PPSD (CH Mid)

Agilent 21:06:53 Oct 18, 2010

R L

Mkr1 2.436 715 3 GHz
-9.09 dBm

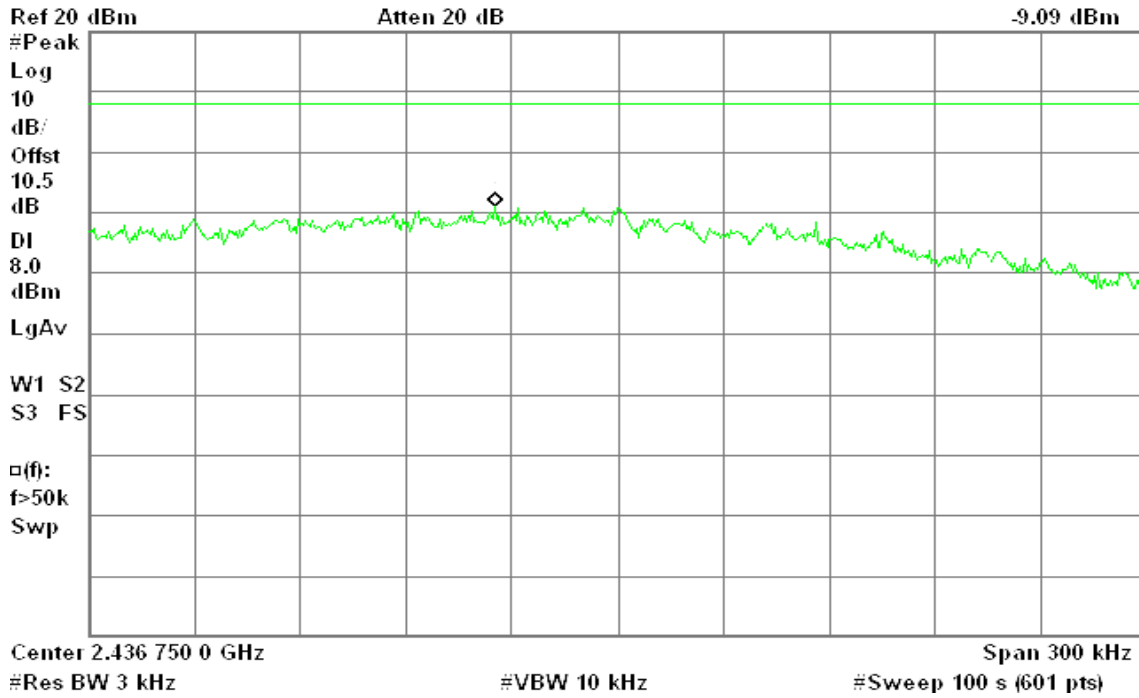


PPSD (CH High)

Agilent 21:03:04 Oct 18, 2010

R T

Mkr1 2.463 280 4 GHz
-16.27 dBm

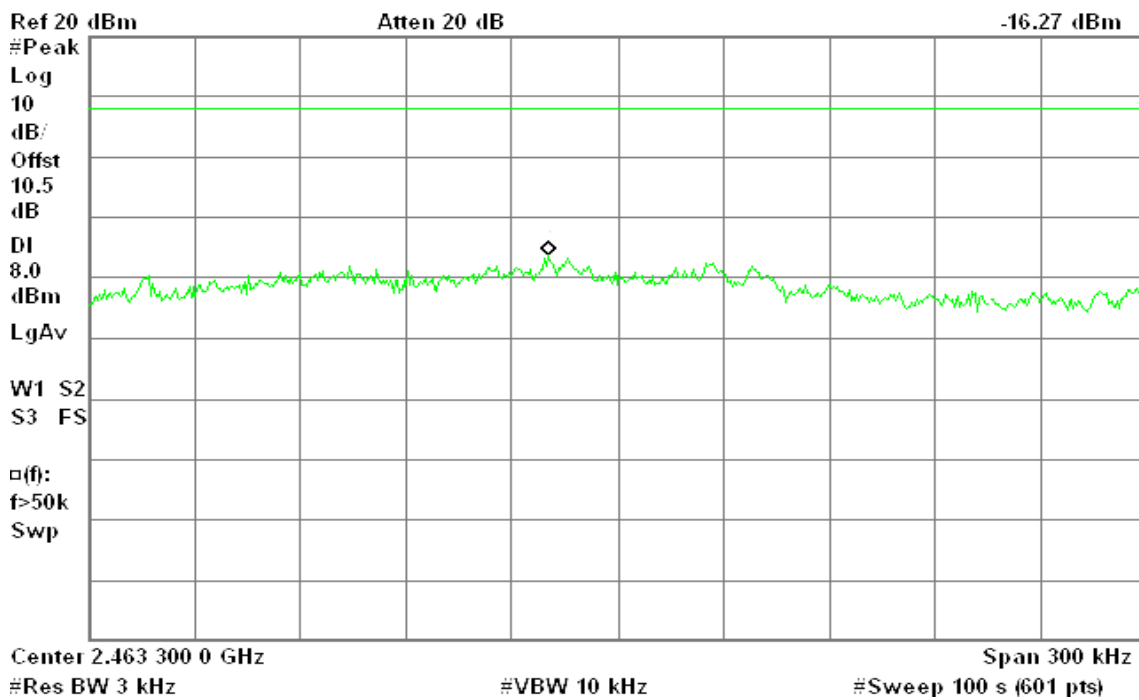



IEEE 802.11n HT 40 MHz mode / Chain 0


PPSD (CH Low)

Agilent 21:36:37 Oct 18, 2010

R T

Mkr1 2.421 072 1 GHz

-22.32 dBm

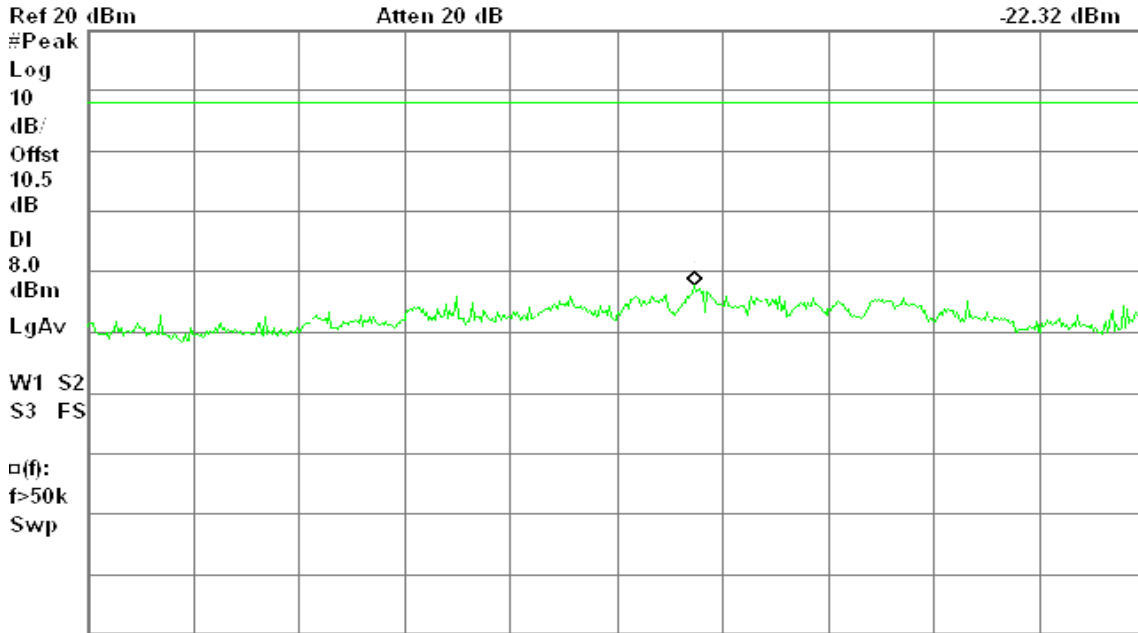


PPSD (CH Mid)

Agilent 21:32:56 Oct 18, 2010

R T

Mkr1 2.434 481 1 GHz

-11.87 dBm

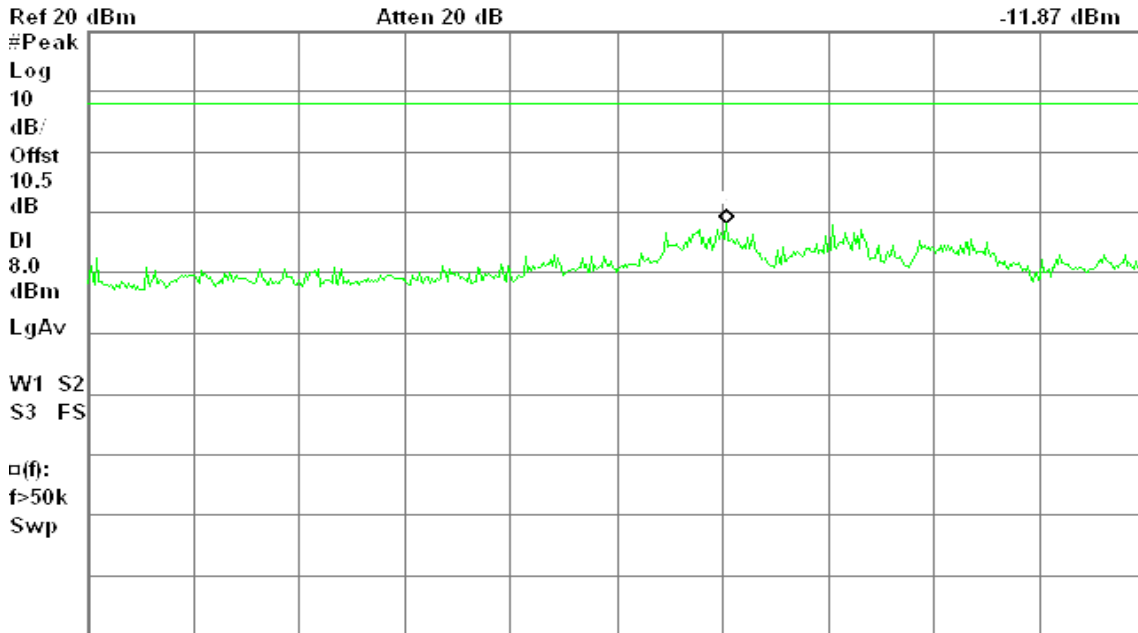




PPSD (CH High)

Agilent 21:28:52 Oct 18, 2010

R L

Mkr1 2.458 201 0 GHz
-22.29 dBm

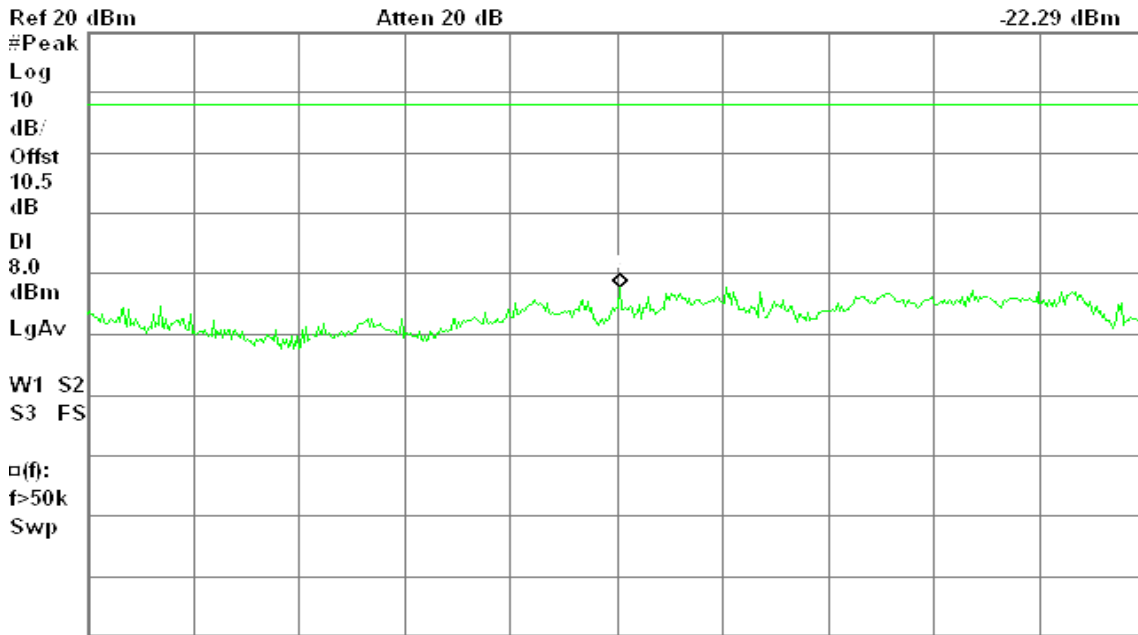

Center 2.458 200 0 GHz Span 300 kHz
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)


IEEE 802.11n HT 40 MHz mode / Chain 1

PPSD (CH Low)

Agilent 21:16:14 Oct 18, 2010

R T

Mkr1 2.420 790 0 GHz
-23.45 dBm

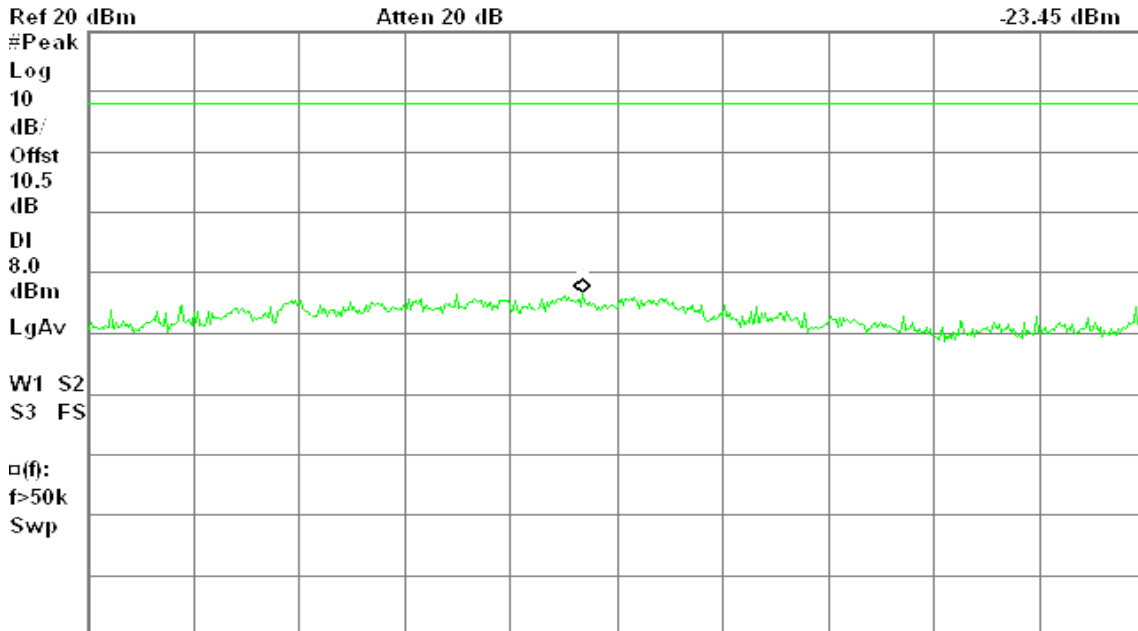

Center 2.420 800 0 GHz Span 300 kHz
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)




PPSD (CH Mid)

Agilent 21:20:00 Oct 18, 2010

R T

Mkr1 2.449 518 6 GHz
-11.90 dBm

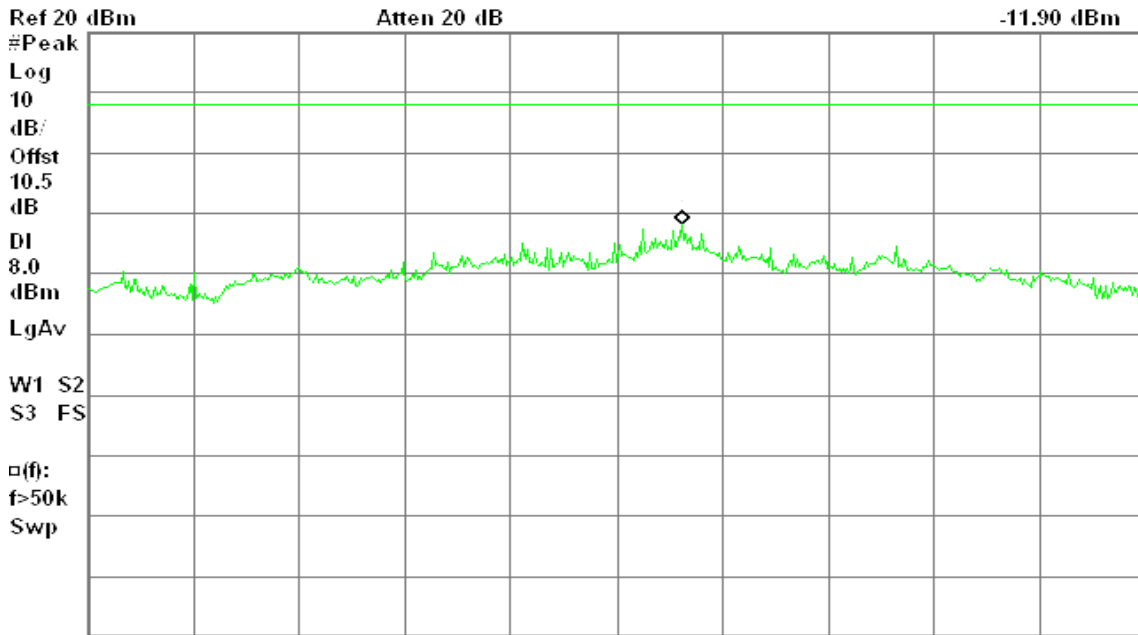

Center 2.449 500 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz


#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 21:24:24 Oct 18, 2010

R T

Mkr1 2.454 552 0 GHz
-18.08 dBm

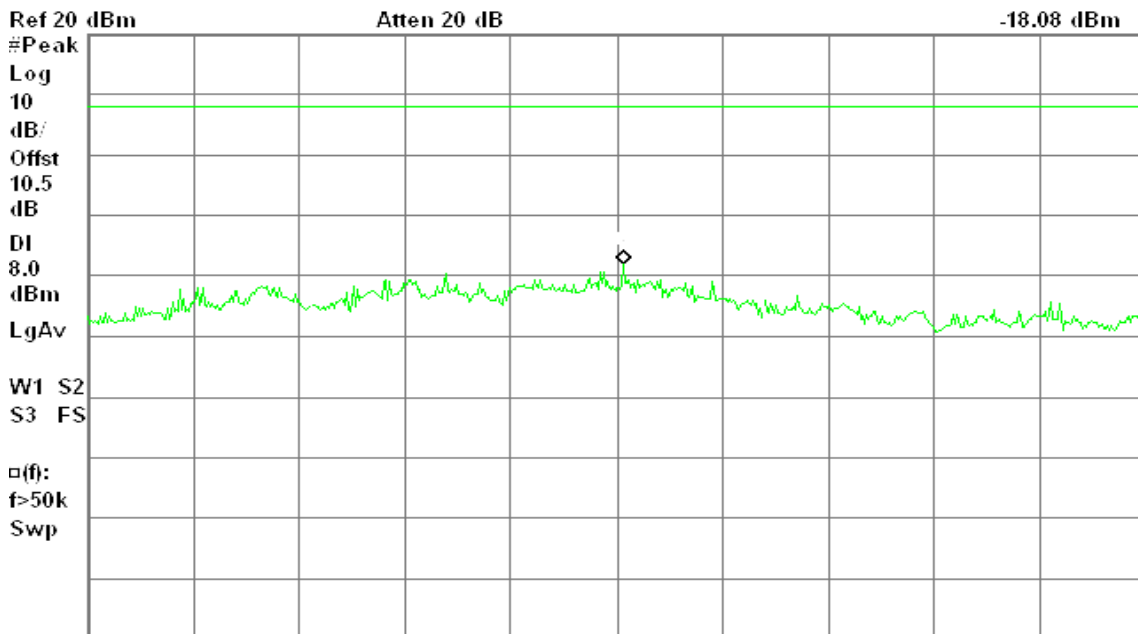

Center 2.454 550 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



IEEE 802.11n HT 20 MHz mode with combiner


PPSD (CH Low)

Agilent 21:52:16 Oct 18, 2010

R T

Mkr1 2.414 512 0 GHz

-12.39 dBm

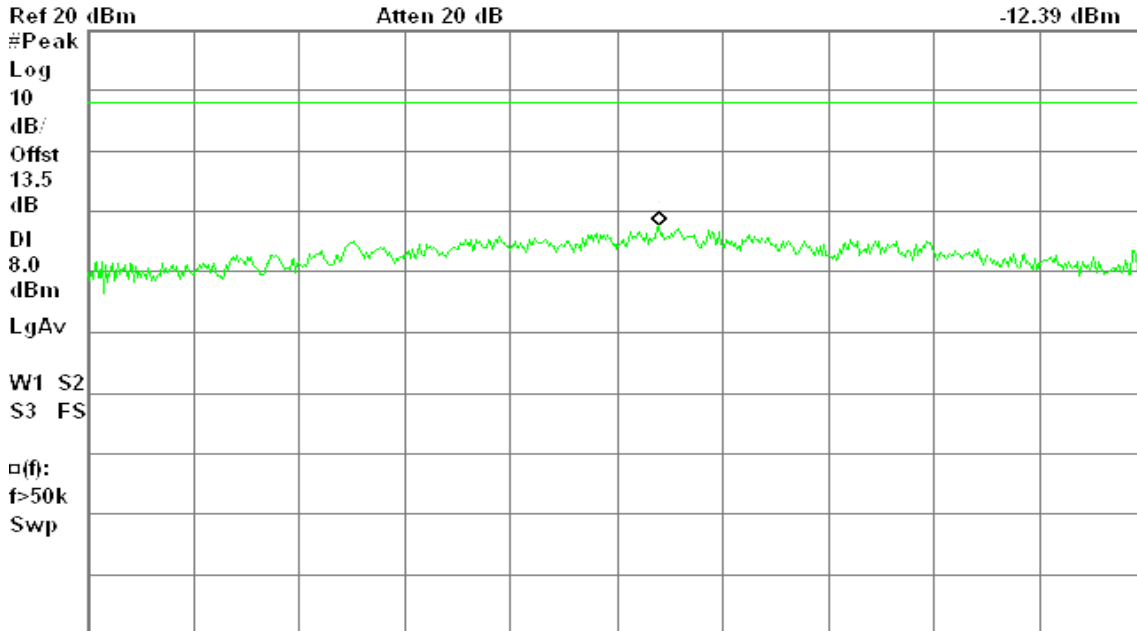

Center 2.414 500 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


PPSD (CH Mid)

Agilent 21:55:19 Oct 18, 2010

R T

Mkr1 2.436 750 6 GHz

-3.46 dBm

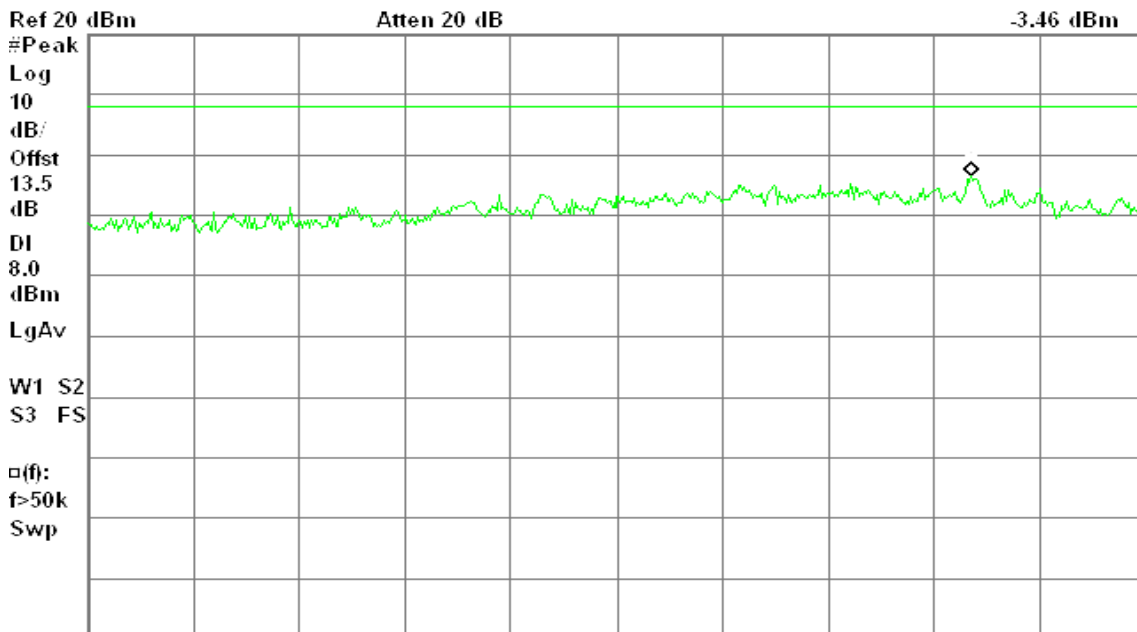

Center 2.436 650 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




PPSD (CH High)

Agilent 21:59:36 Oct 18, 2010

R L

Mkr1 2.461 750 8 GHz
-11.34 dBm

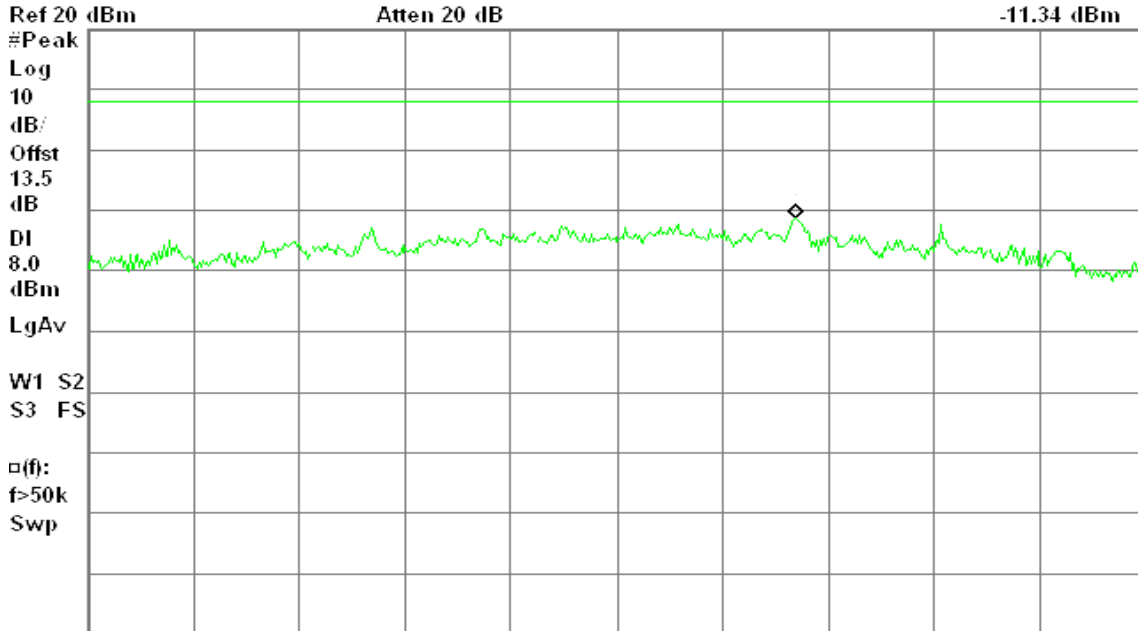

Center 2.461 700 0 GHz Span 300 kHz
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)


IEEE 802.11n HT 40 MHz mode with combiner

PPSD (CH Low)

Agilent 21:41:05 Oct 18, 2010

R T

Mkr1 2.419 494 5 GHz
-14.89 dBm

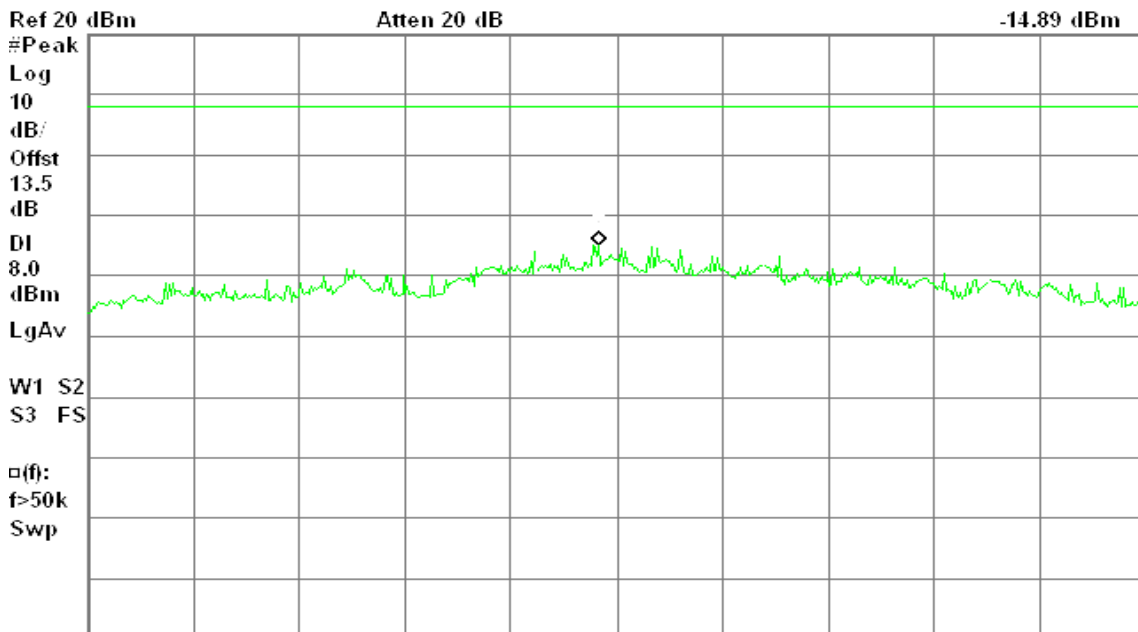

Center 2.419 500 0 GHz Span 300 kHz
#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)




PPSD (CH Mid)

Agilent 21:44:24 Oct 18, 2010

R T

Mkr1 2.434 503 0 GHz
-6.83 dBm

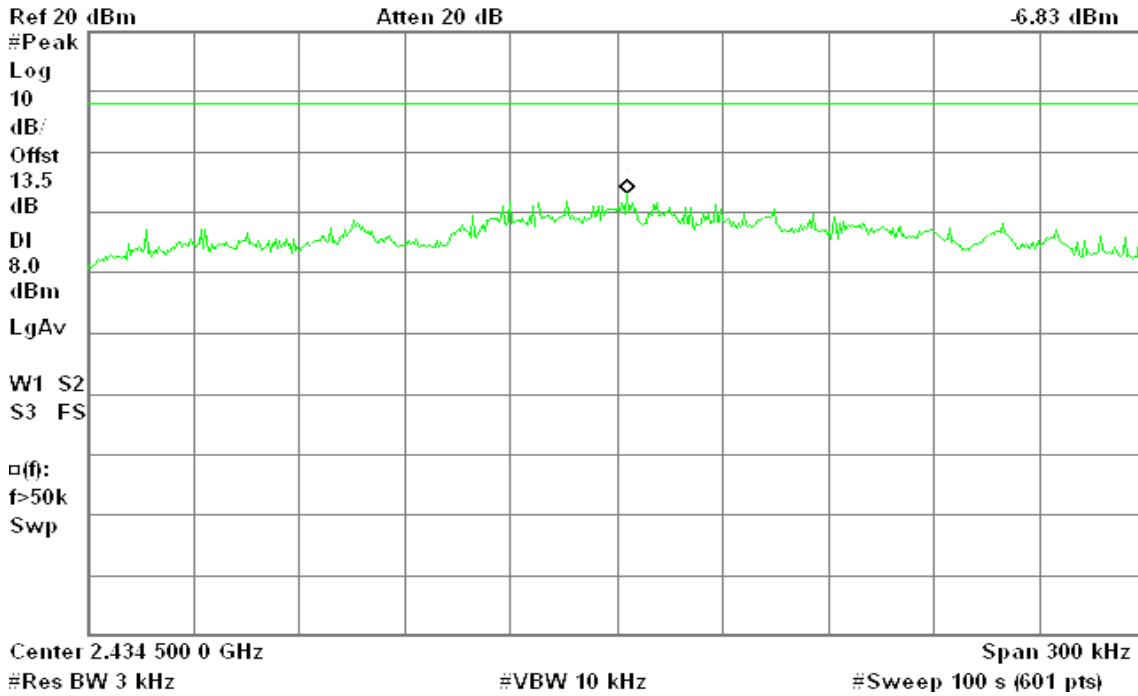


PPSD (CH High)

Agilent 21:48:28 Oct 18, 2010

R T

Mkr1 2.461 997 4 GHz
-17.26 dBm

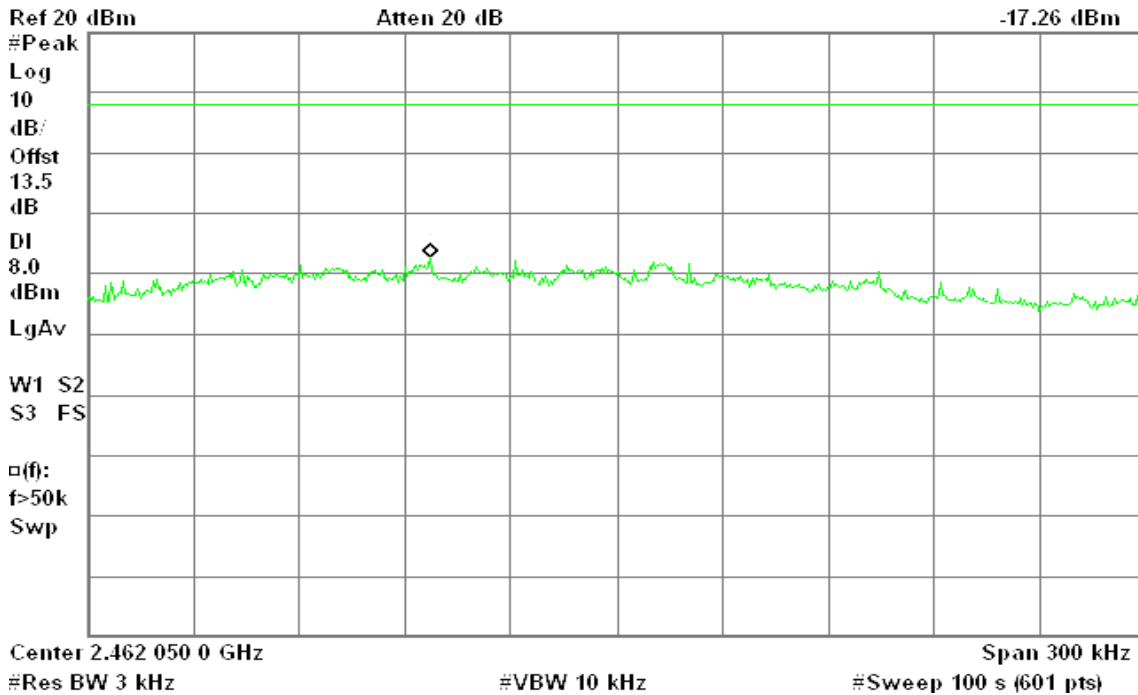




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

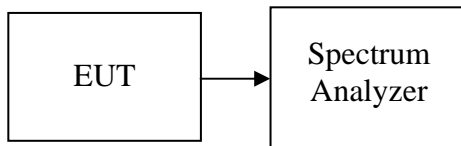

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.




CH High

Agilent 20:33:13 Oct 18, 2010

R T

Mkr1 2.47 GHz
1.59 dBm

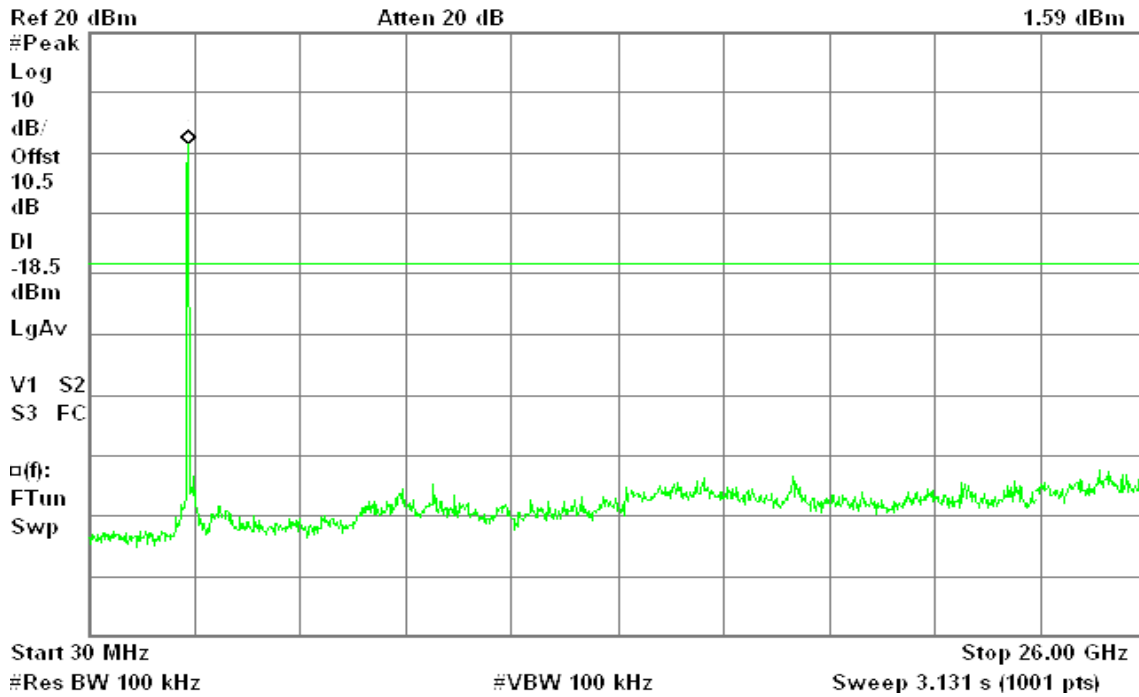




IEEE 802.11g mode

CH Low

Agilent 20:37:02 Oct 18, 2010


R T

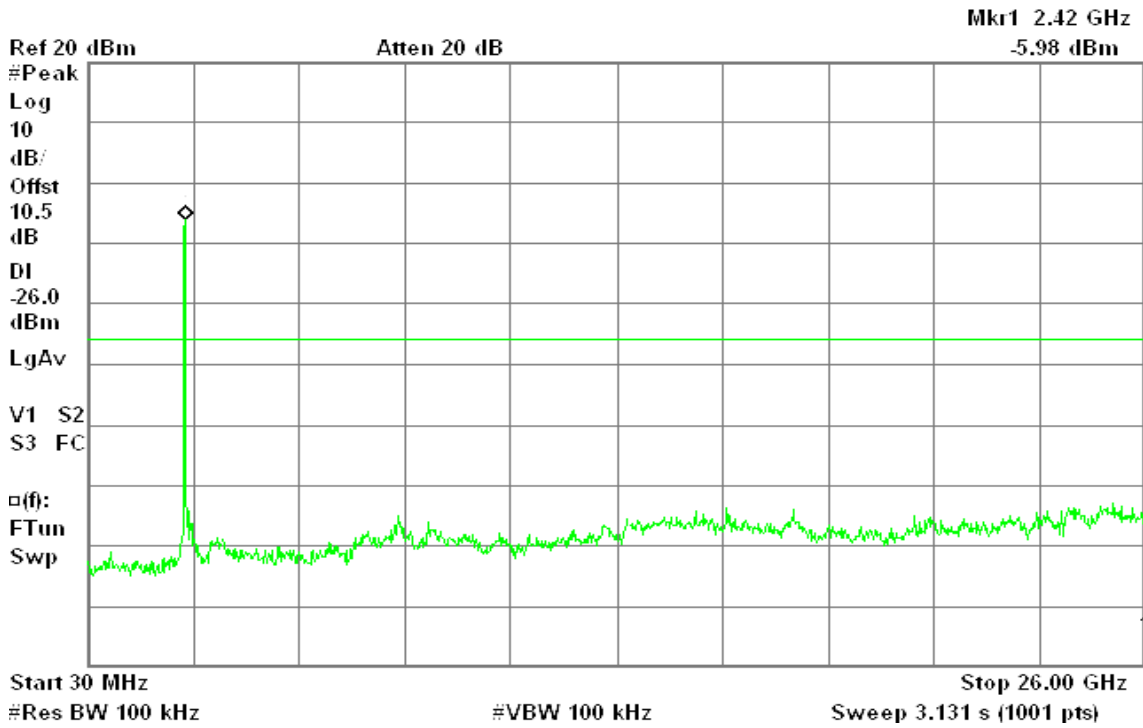

CH Mid

Agilent 20:41:14 Oct 18, 2010

R T

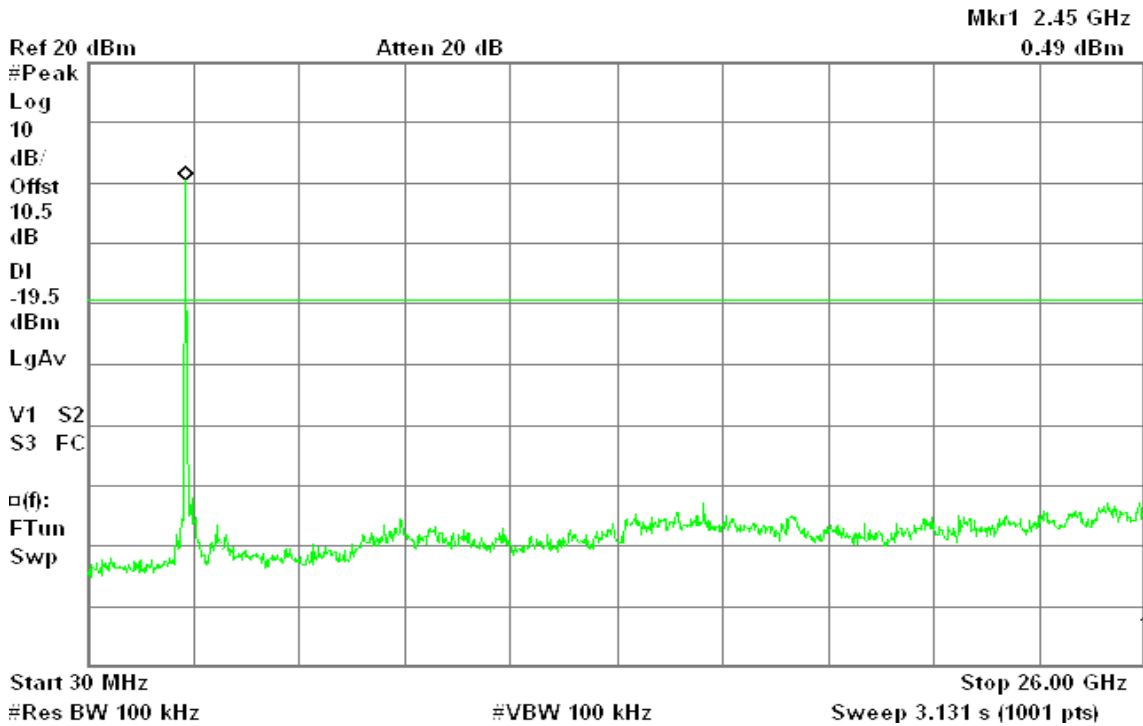




CH High

Agilent 20:44:52 Oct 18, 2010

R T

Mkr1 2.47 GHz
-6.36 dBm

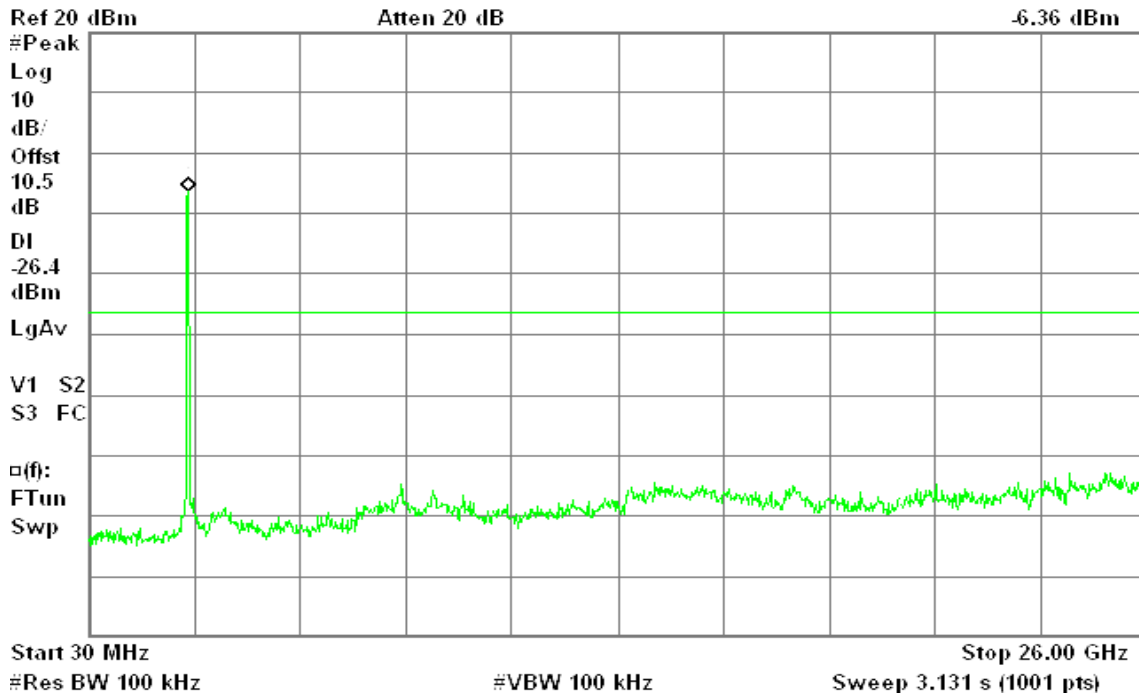



IEEE 802.11n HT 20 MHz mode / Chain 0


CH Low

Agilent 20:50:17 Oct 18, 2010

R T

Mkr1 2.39 GHz

-5.30 dBm

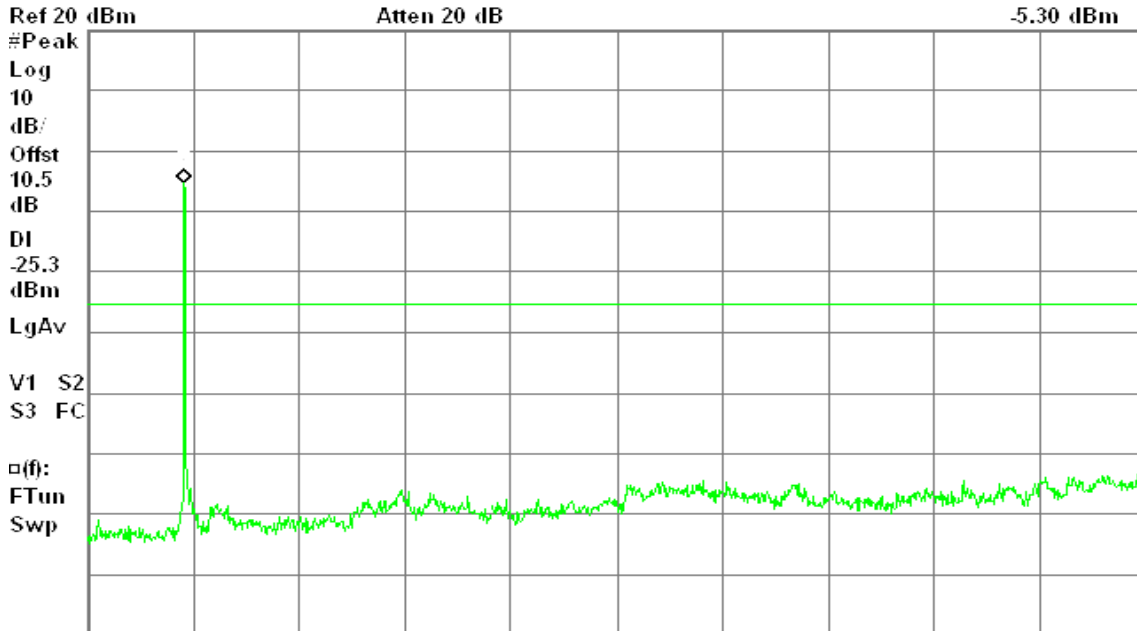


CH Mid

Agilent 20:54:54 Oct 18, 2010

R T

Mkr1 2.45 GHz

4.60 dBm

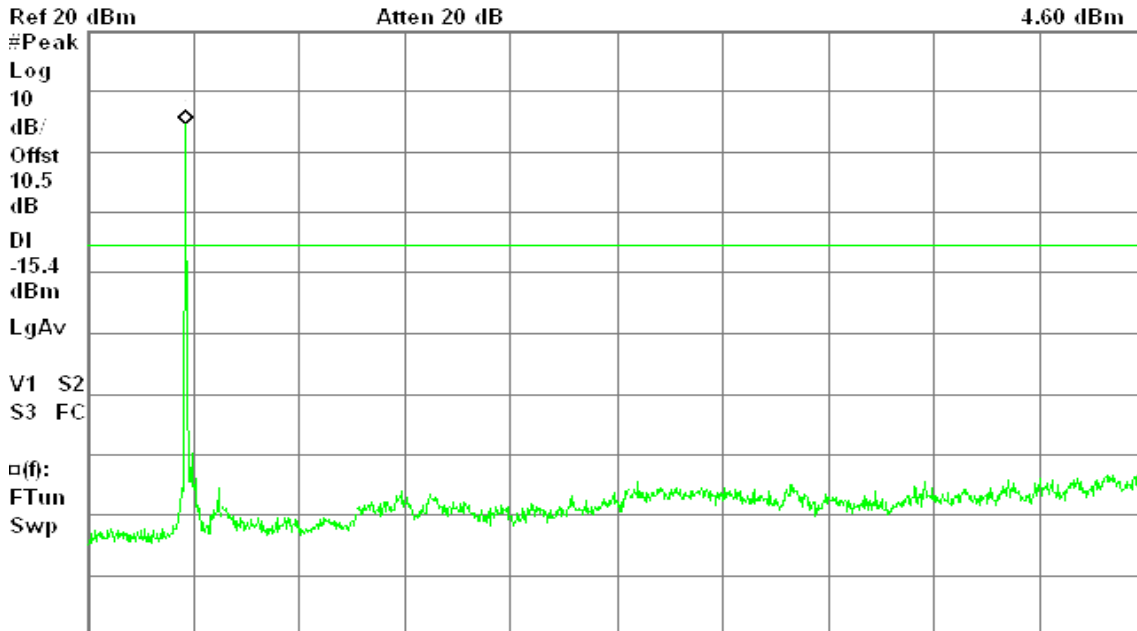




CH High

Agilent 20:59:12 Oct 18, 2010

R T

Mkr1 2.45 GHz
-4.21 dBm

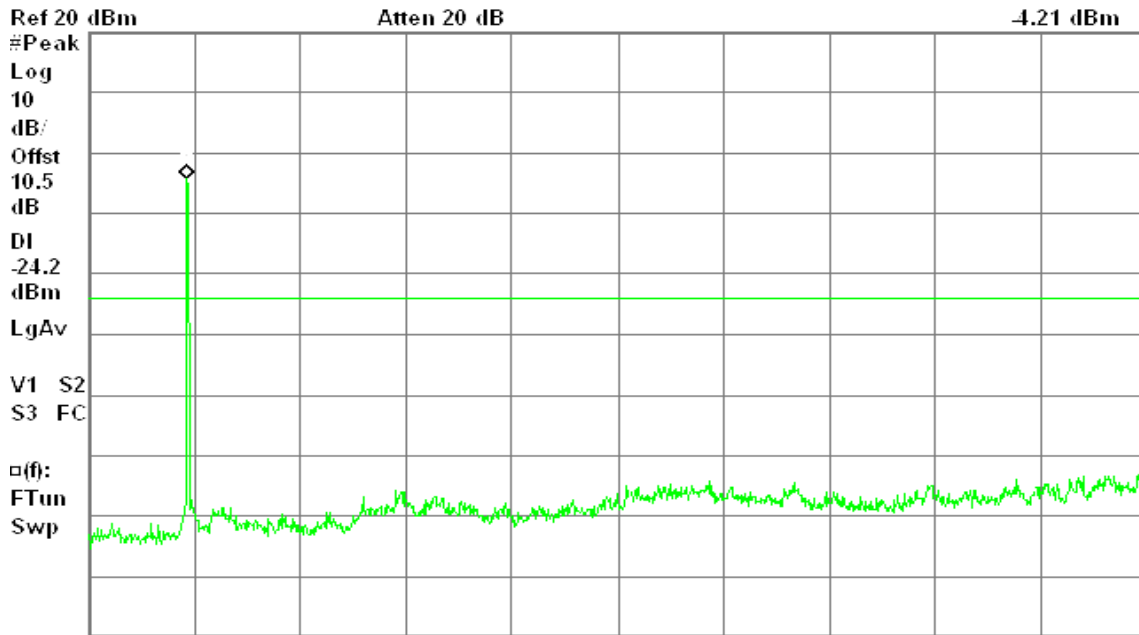

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)


IEEE 802.11n HT 20 MHz mode / Chain 1

CH Low

Agilent 21:11:52 Oct 18, 2010

R T

Mkr1 2.39 GHz
-5.42 dBm

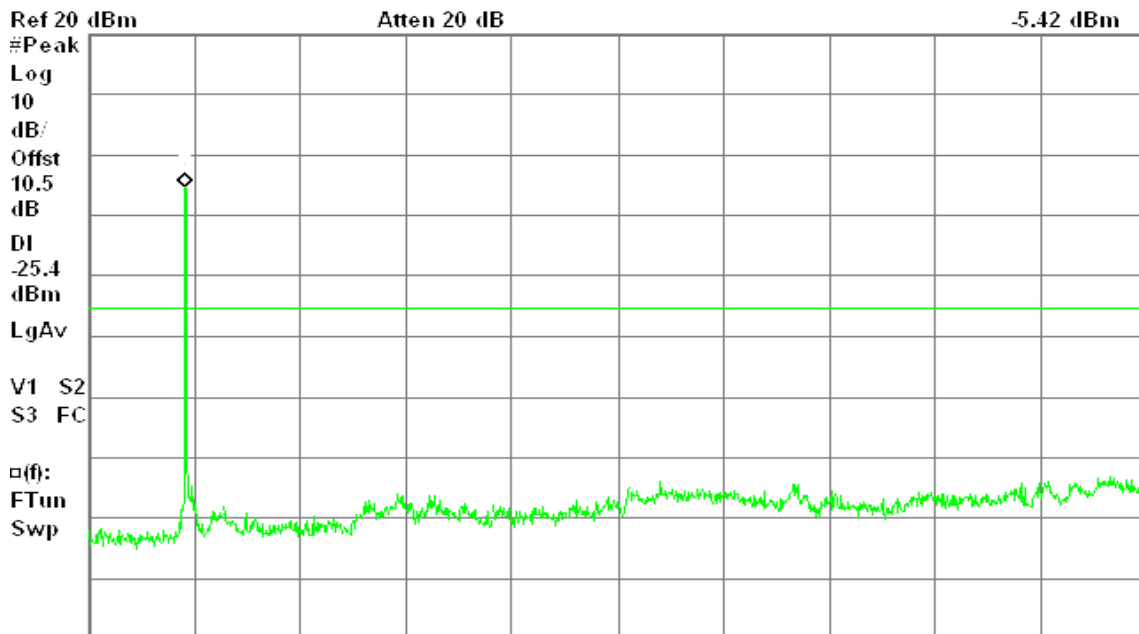

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)




CH Mid

Agilent 21:07:31 Oct 18, 2010

R T

Mkr1 2.45 GHz
3.49 dBm

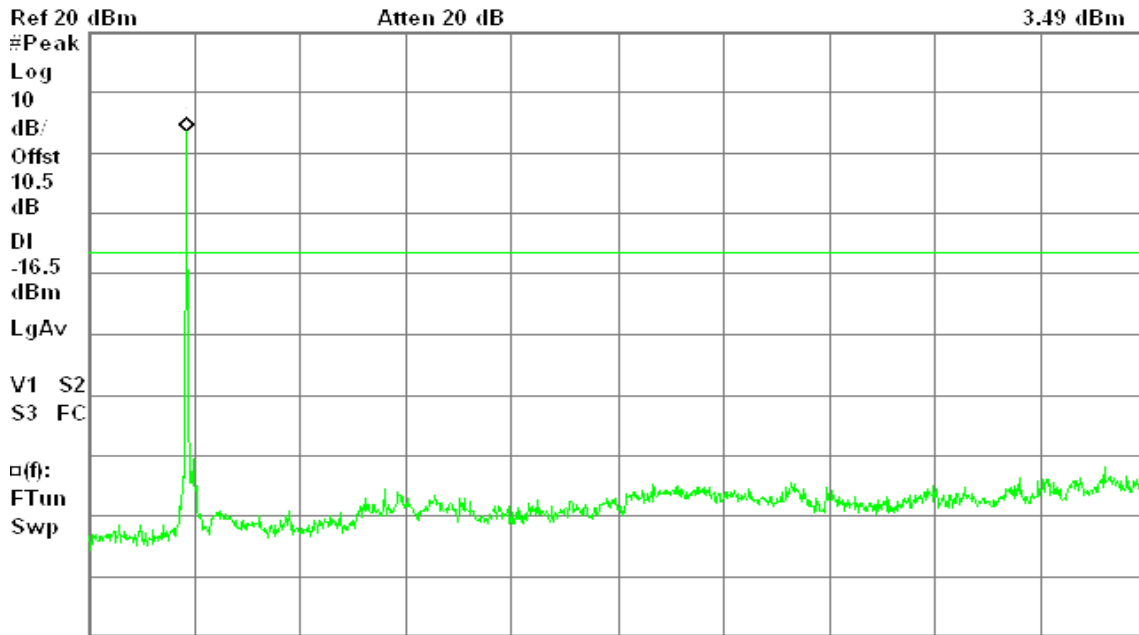

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 3.131 s (1001 pts)

CH High

Agilent 21:03:43 Oct 18, 2010

R T

Mkr1 2.47 GHz
-5.95 dBm

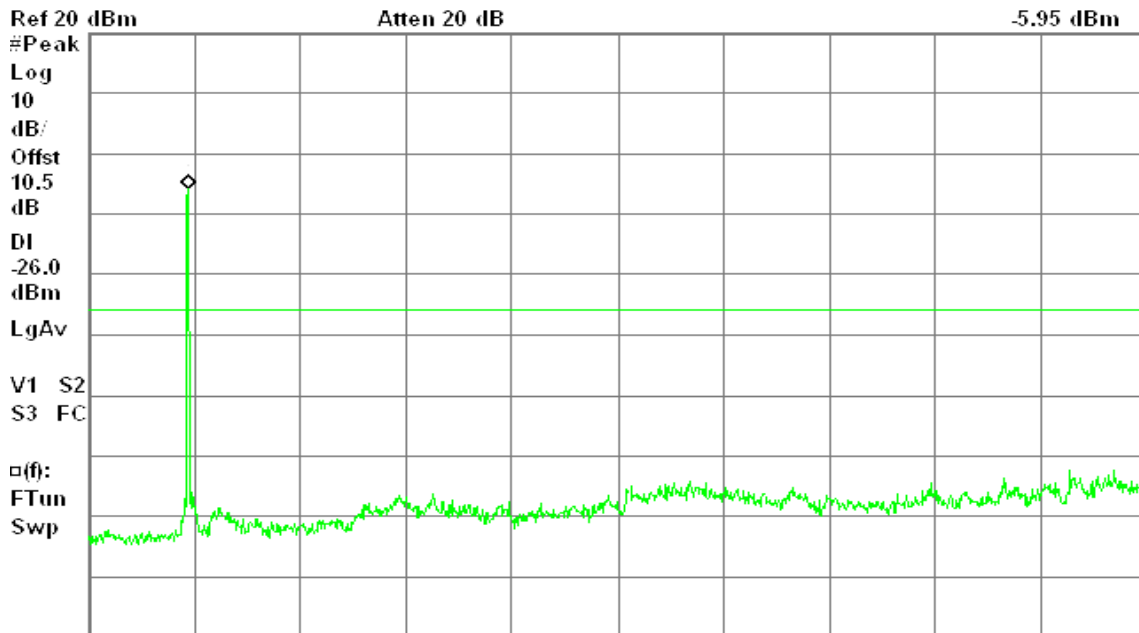

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



IEEE 802.11n HT 40 MHz mode / Chain 0


CH Low

Agilent 21:37:10 Oct 18, 2010

R T

Mkr1 2.42 GHz

-9.41 dBm

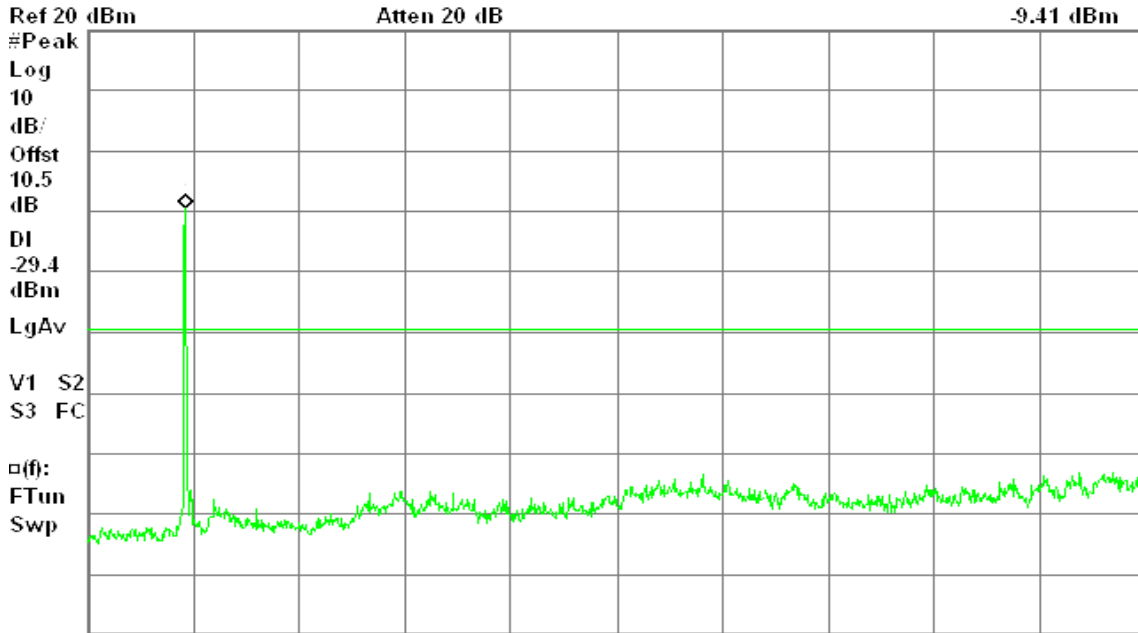


CH Mid

Agilent 21:33:35 Oct 18, 2010

R T

Mkr1 2.45 GHz

-1.88 dBm

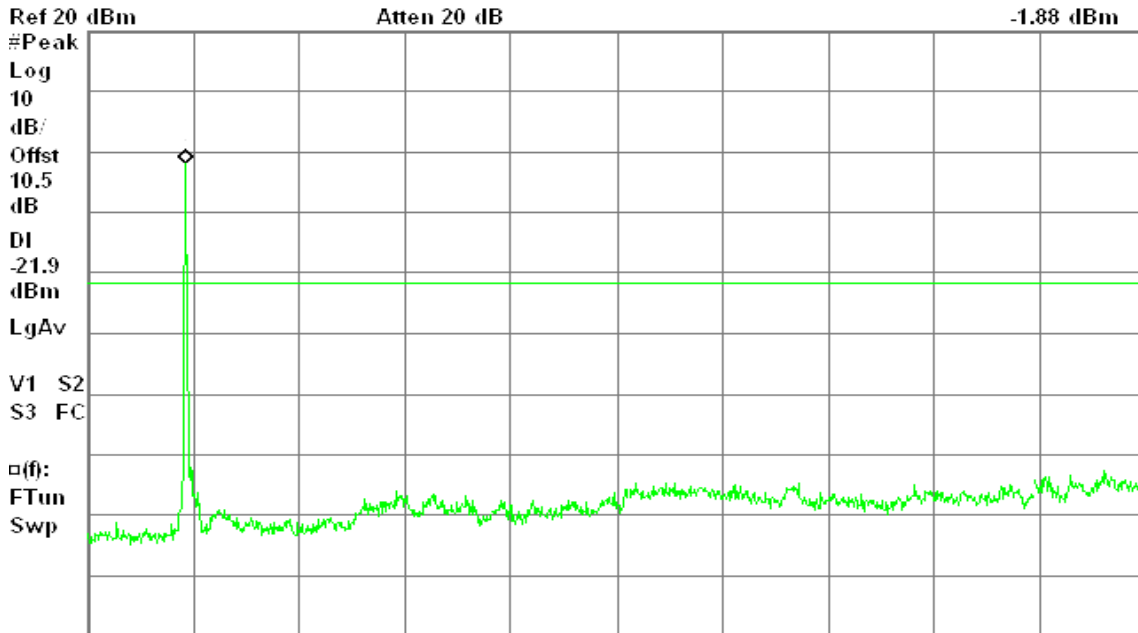




CH High

Agilent 21:29:27 Oct 18, 2010

R T

Mkr1 2.45 GHz
-4.93 dBm

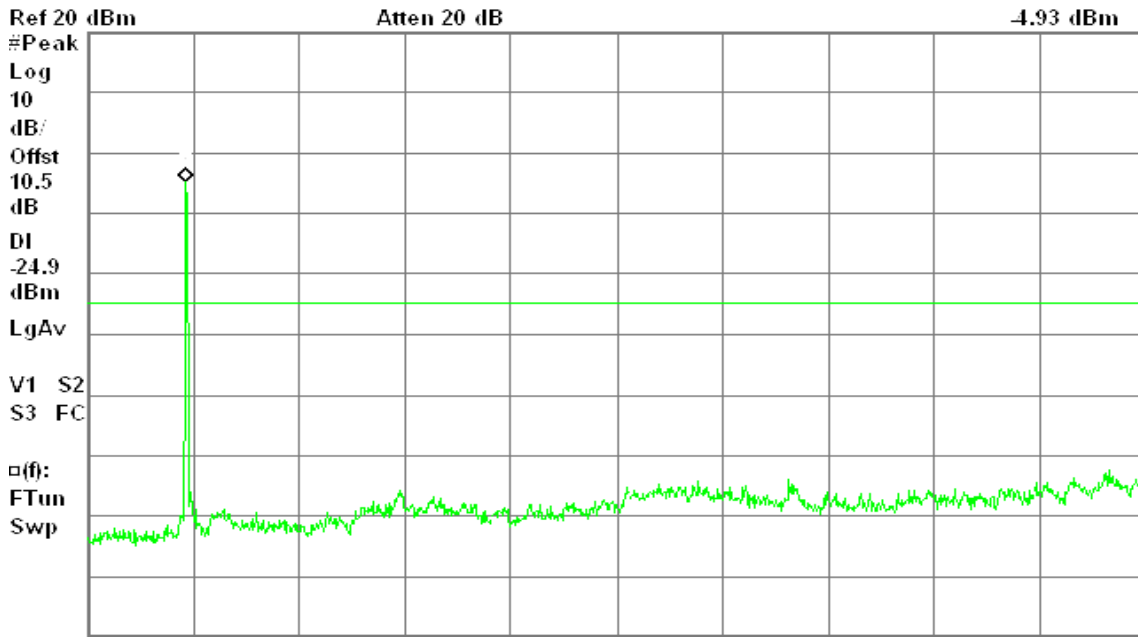

Center 13.02 GHz Span 25.97 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)


IEEE 802.11n HT 40 MHz mode / Chain 1

CH Low

Agilent 21:16:47 Oct 18, 2010

R T

Mkr1 2.42 GHz
-7.64 dBm

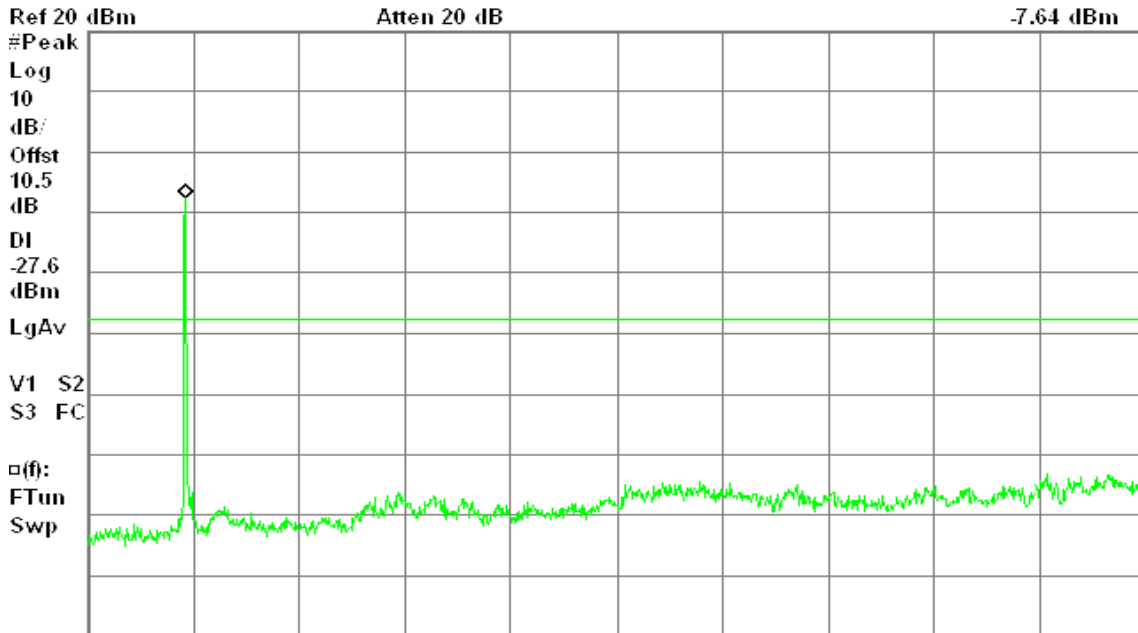

Center 13.02 GHz Span 25.97 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)




CH Mid

Agilent 21:20:31 Oct 18, 2010

R L

Mkr1 2.45 GHz
0.57 dBm

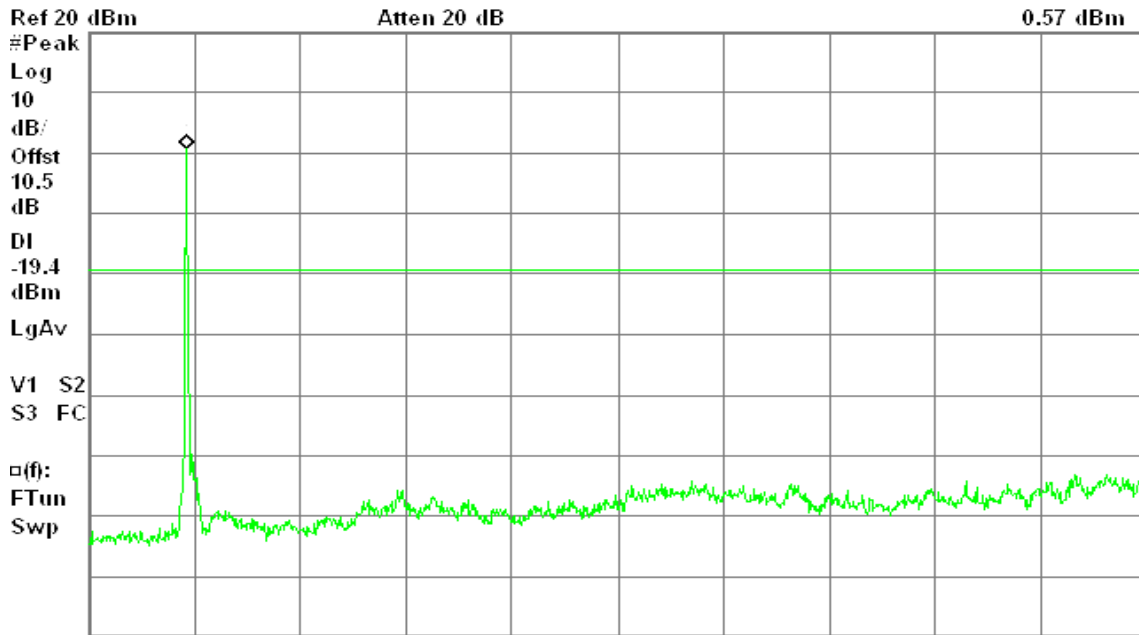

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 3.131 s (1001 pts)

CH High

Agilent 21:25:04 Oct 18, 2010

R T

Mkr1 2.45 GHz
-7.34 dBm

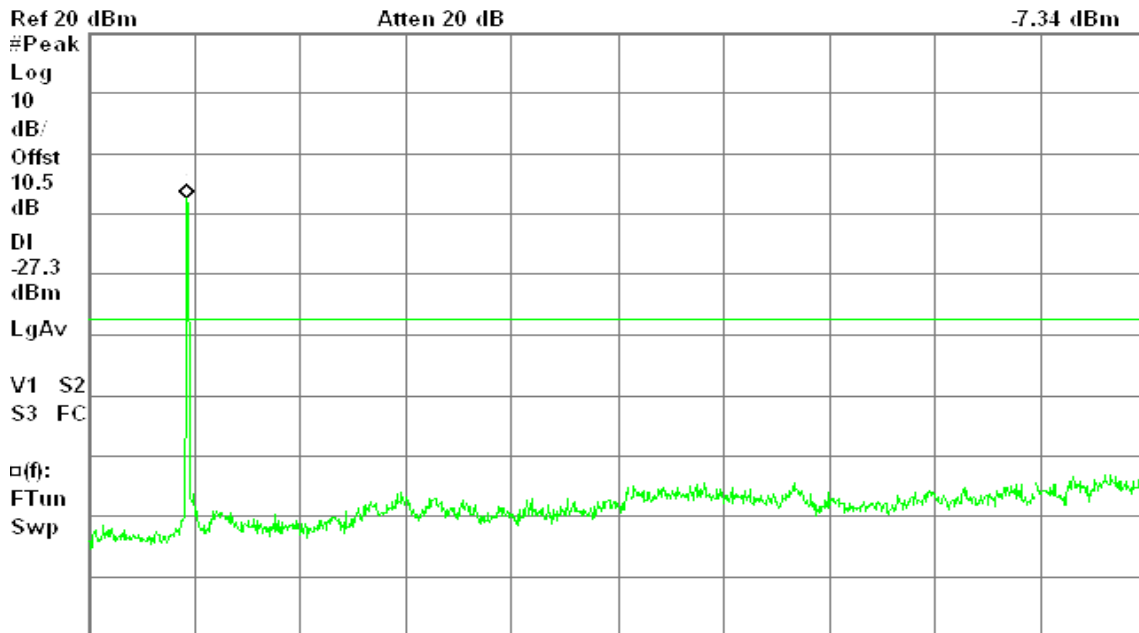

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



IEEE 802.11n HT 20 MHz mode with combiner


CH Low

Agilent 21:52:47 Oct 18, 2010

R T

Mkr1 2.42 GHz

-0.69 dBm

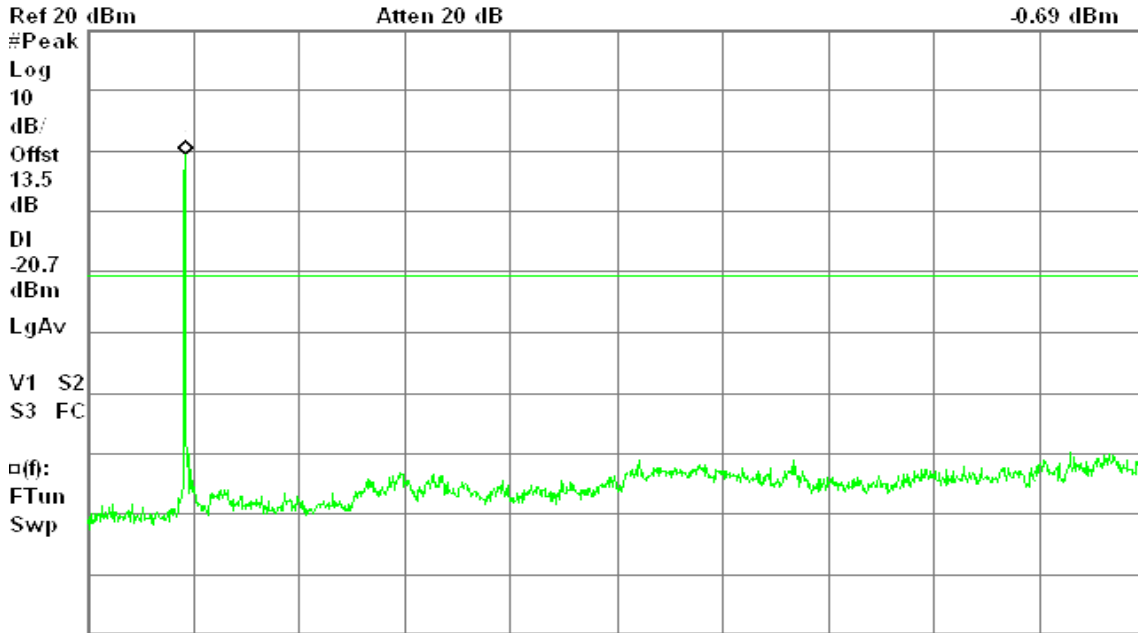


CH Mid

Agilent 21:56:18 Oct 18, 2010

R T

Mkr1 2.42 GHz

4.84 dBm

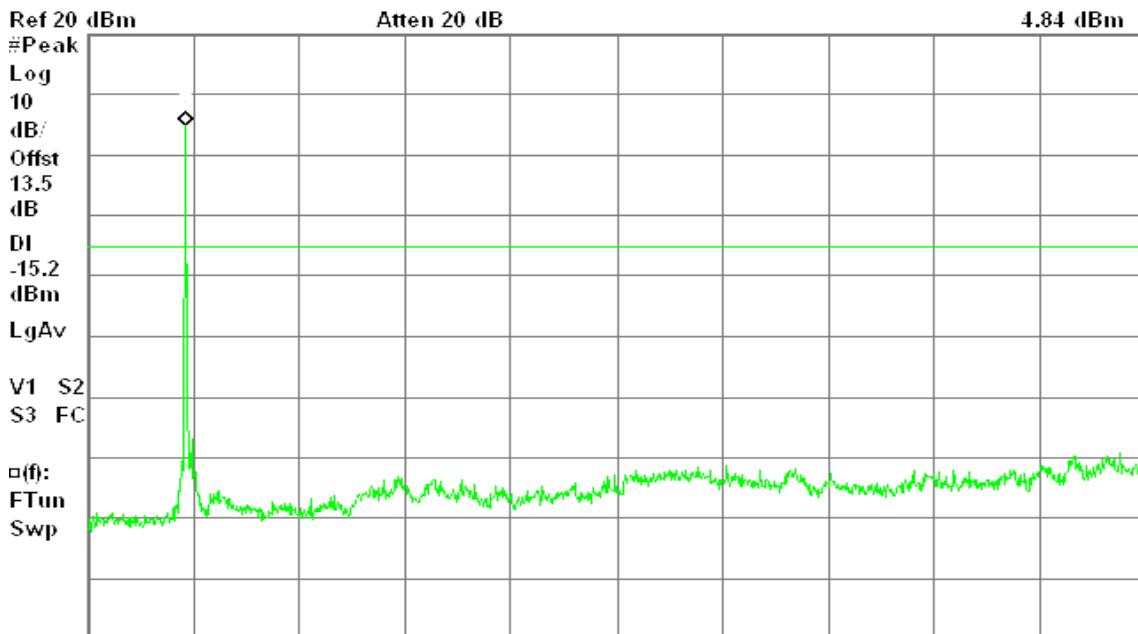




CH High

Agilent 22:00:17 Oct 18, 2010

R T

Mkr1 2.47 GHz
-0.40 dBm

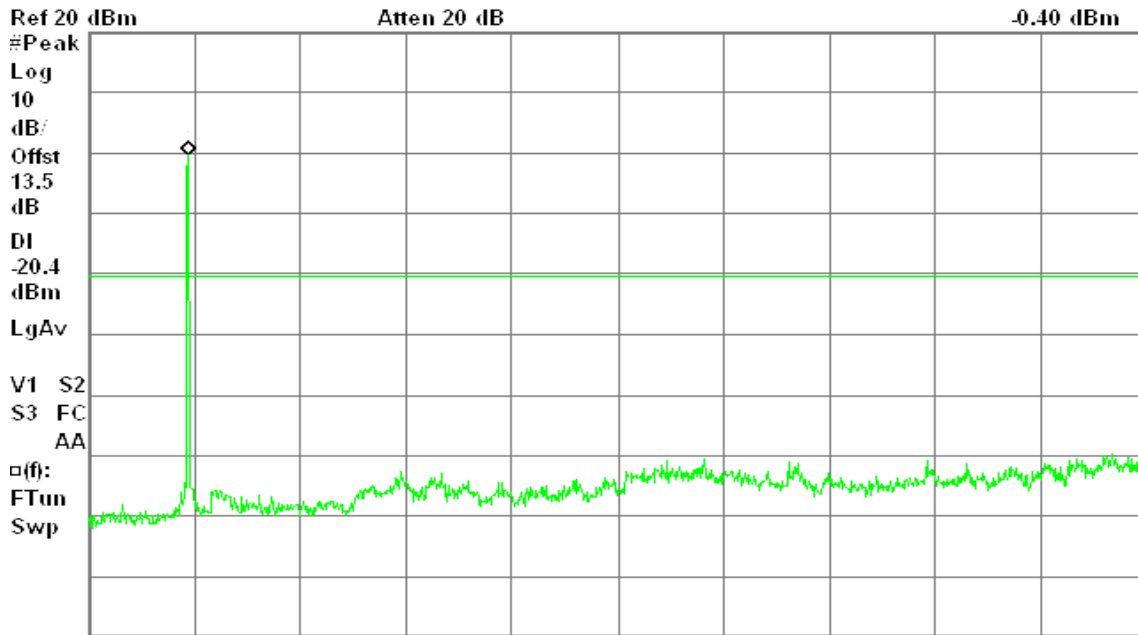

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)


IEEE 802.11n HT 40 MHz mode with combiner

CH Low

Agilent 21:41:48 Oct 18, 2010

R T

Mkr1 2.42 GHz
-1.72 dBm

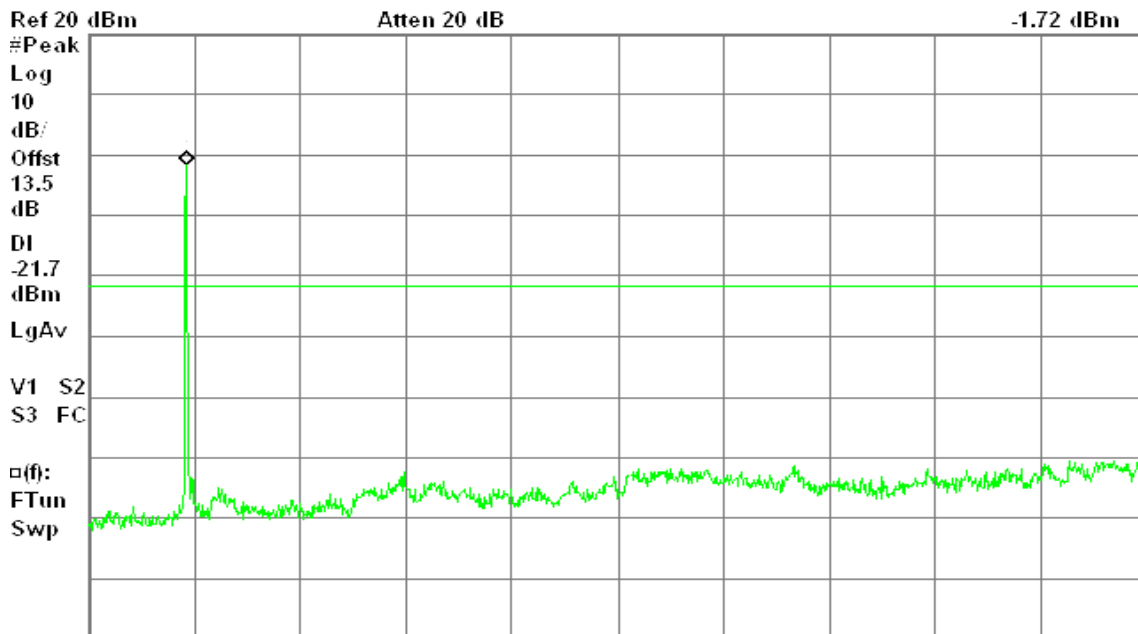

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)




CH Mid

Agilent 21:44:59 Oct 18, 2010

R T

Mkr1 2.45 GHz
5.63 dBm

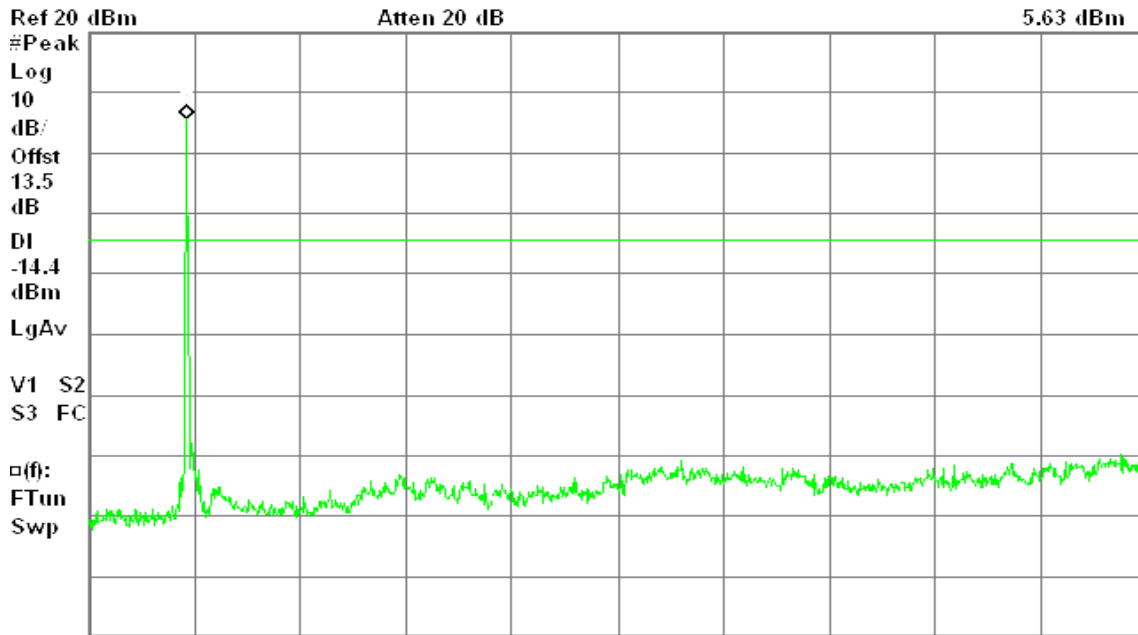

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 3.131 s (1001 pts)

CH High

Agilent 21:49:14 Oct 18, 2010

R T

Mkr1 2.45 GHz
-4.28 dBm

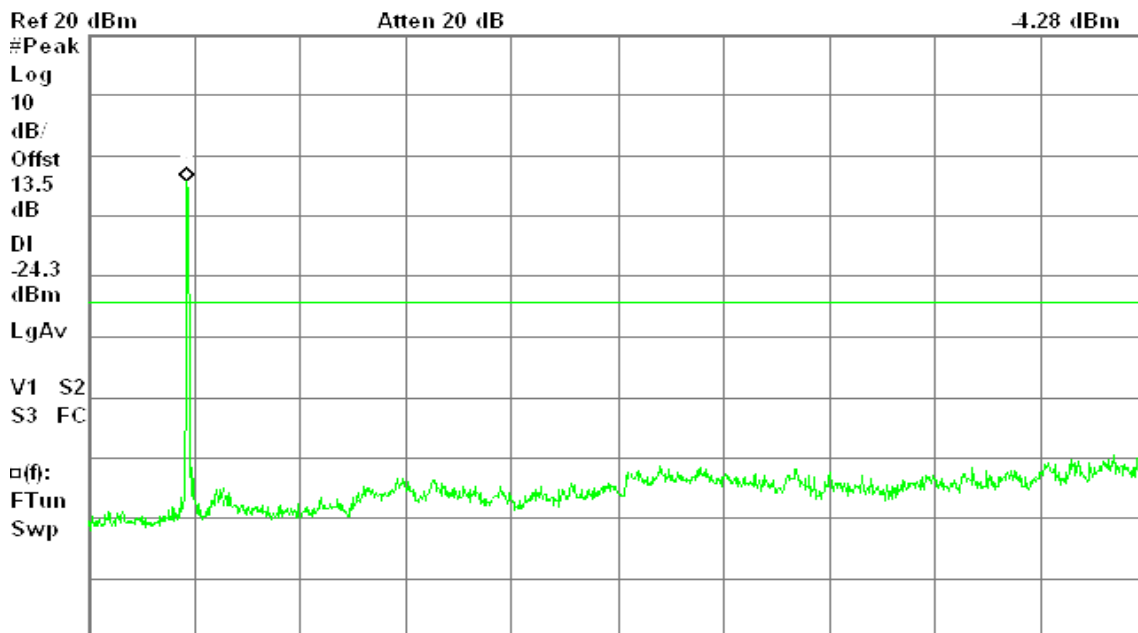

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



7.7 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

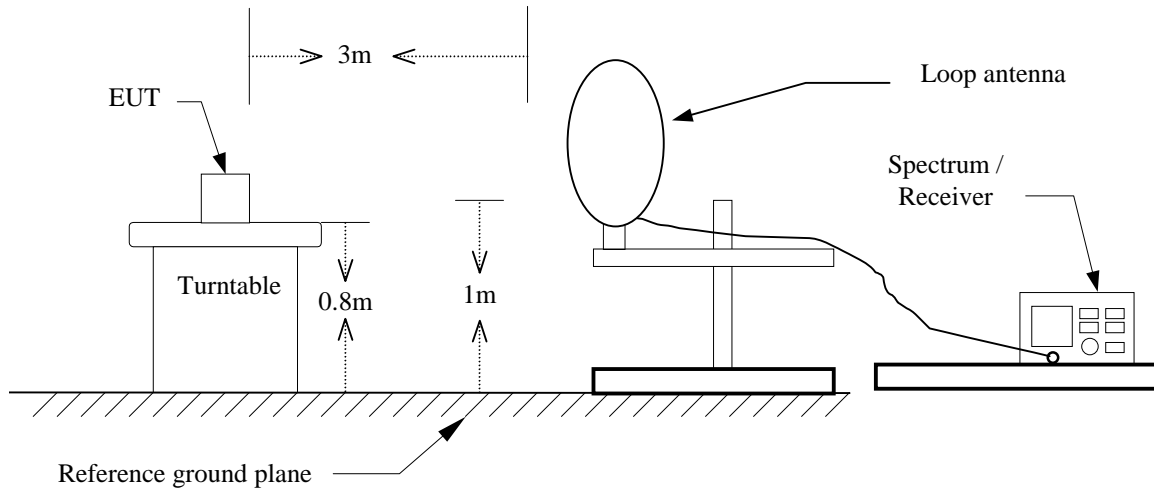


30MHz ~ 1GHz

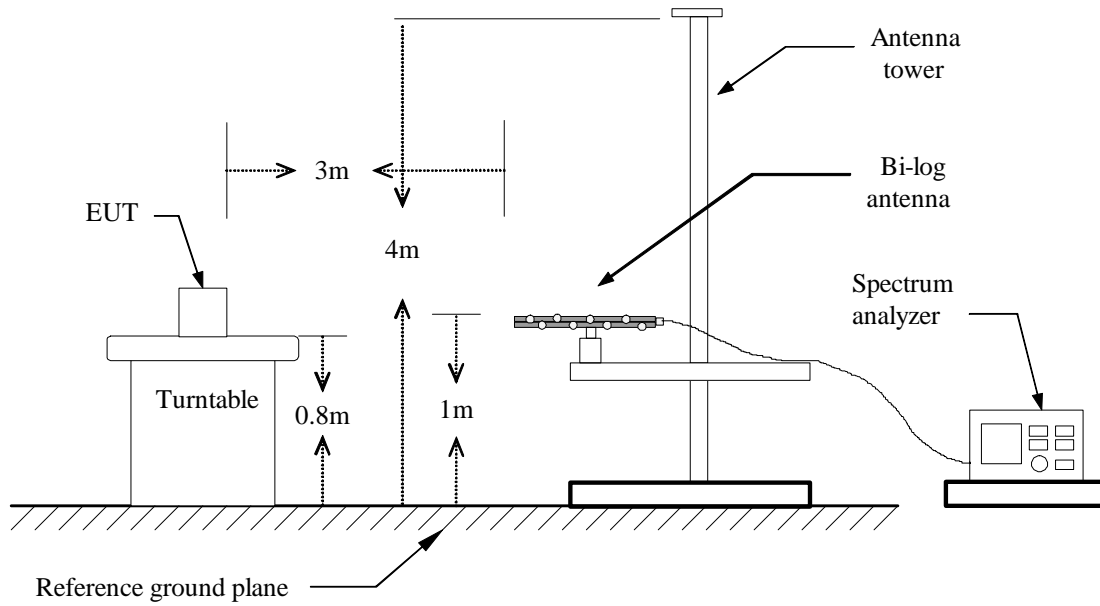



Above 1 GHz

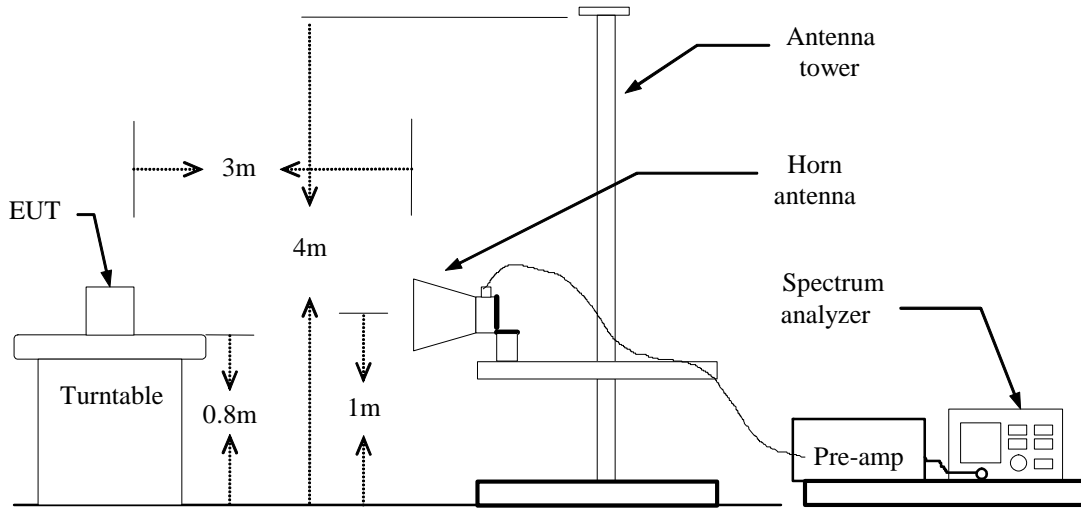



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** October 7, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
49.40	51.48	-14.67	36.81	40.00	-3.19	Peak	V
374.35	40.88	-7.58	33.29	46.00	-12.71	Peak	V
624.93	40.40	-3.48	36.93	46.00	-9.07	Peak	V
749.42	39.32	-1.83	37.49	46.00	-8.51	Peak	V
875.52	38.95	-0.73	38.22	46.00	-7.78	Peak	V
995.15	39.22	0.91	40.13	54.00	-13.87	Peak	V
125.38	47.35	-9.65	37.70	43.50	-5.80	Peak	H
249.87	44.12	-10.90	33.22	46.00	-12.78	Peak	H
624.93	43.42	-3.48	39.94	46.00	-6.06	Peak	H
749.42	37.56	-1.83	35.73	46.00	-10.27	Peak	H
875.52	40.59	-0.73	39.86	46.00	-6.14	Peak	H
899.77	36.75	-0.64	36.11	46.00	-9.89	Peak	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1250.00	61.51	51.75	-9.18	52.34	42.57	74.00	54.00	-11.43	AVG	V
1373.33	60.16	55.71	-8.97	51.19	46.74	74.00	54.00	-7.26	AVG	V
1873.33	58.98	49.77	-5.32	53.67	44.45	74.00	54.00	-9.55	AVG	V
2500.00	60.05	54.10	-2.66	57.39	51.44	74.00	54.00	-2.56	AVG	V
4000.00	58.49	50.19	0.49	58.98	50.68	74.00	54.00	-3.32	AVG	V
5000.00	55.17	52.48	1.12	56.29	53.60	74.00	54.00	-0.40	AVG	V
1250.00	62.48	49.53	-9.18	53.31	40.35	74.00	54.00	-13.65	AVG	H
1373.33	61.52	50.11	-8.97	52.55	41.14	74.00	54.00	-12.86	AVG	H
1500.00	64.05	52.95	-8.76	55.29	44.19	74.00	54.00	-9.81	AVG	H
1876.67	58.72	53.74	-5.29	53.43	48.45	74.00	54.00	-5.55	AVG	H
5000.00	50.48	---	1.12	51.60	---	74.00	54.00	-2.40	Peak	H
7233.33	53.29	45.91	5.24	58.53	51.15	74.00	54.00	-2.85	AVG	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1250.00	62.30	55.10	-9.18	53.12	45.92	74.00	54.00	-8.08	AVG	V
1500.00	61.63	56.42	-8.76	52.87	47.66	74.00	54.00	-6.34	AVG	V
1623.33	61.50	54.38	-7.62	53.88	46.76	74.00	54.00	-7.24	AVG	V
1873.33	60.21	55.67	-5.32	54.89	50.35	74.00	54.00	-3.65	AVG	V
4000.00	54.48	51.23	0.49	54.97	51.72	74.00	54.00	-2.28	AVG	V
5000.00	57.43	52.71	1.12	58.55	53.83	74.00	54.00	-0.17	AVG	V
1250.00	60.88	56.41	-9.18	51.71	47.23	74.00	54.00	-6.77	AVG	H
1350.00	61.61	55.74	-9.01	52.60	46.73	74.00	54.00	-7.27	AVG	H
2500.00	62.89	51.76	-2.66	60.23	49.10	74.00	54.00	-4.90	AVG	H
2600.00	60.80	52.49	-2.37	58.43	50.12	74.00	54.00	-3.88	AVG	H
4000.00	50.31	---	0.49	50.80	---	74.00	54.00	-3.20	Peak	H
5000.00	49.91	---	1.12	51.03	---	74.00	54.00	-2.97	Peak	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1500.00	63.52	55.31	-8.76	54.76	46.55	74.00	54.00	-7.45	AVG	V
1623.33	61.60	55.28	-7.62	53.98	47.66	74.00	54.00	-6.34	AVG	V
1873.33	59.55	51.99	-5.32	54.23	46.67	74.00	54.00	-7.33	AVG	V
2250.00	59.44	51.34	-3.41	56.03	47.93	74.00	54.00	-6.07	AVG	V
2376.67	58.98	53.02	-3.03	55.96	49.99	74.00	54.00	-4.01	AVG	V
2500.00	59.73	54.11	-2.66	57.07	51.45	74.00	54.00	-2.55	AVG	V
1250.00	61.43	53.09	-9.18	52.25	43.91	74.00	54.00	-10.09	AVG	H
1376.67	60.40	52.46	-8.96	51.43	43.50	74.00	54.00	-10.50	AVG	H
1500.00	62.87	50.15	-8.76	54.11	41.39	74.00	54.00	-12.61	AVG	H
2500.00	61.16	54.71	-2.66	58.50	52.05	74.00	54.00	-1.95	AVG	H
5150.00	49.47	---	1.33	50.80	---	74.00	54.00	-3.20	Peak	H
7383.33	48.33	---	5.34	53.68	---	74.00	54.00	-0.32	Peak	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1626.67	60.79	52.77	-7.59	53.20	45.18	74.00	54.00	-8.80	AVG	V
1873.33	60.17	56.57	-5.32	54.85	51.25	74.00	54.00	-2.75	AVG	V
2100.00	58.34	50.95	-3.85	54.49	47.10	74.00	54.00	-6.90	AVG	V
2126.67	58.50	49.22	-3.77	54.73	45.45	74.00	54.00	-8.55	AVG	V
2250.00	59.61	49.75	-3.41	56.20	46.34	74.00	54.00	-7.66	AVG	V
2373.33	58.70	50.19	-3.04	55.67	47.15	74.00	54.00	-6.85	AVG	V
1250.00	62.56	59.17	-9.18	53.38	49.99	74.00	54.00	-4.01	AVG	H
1373.33	61.48	56.84	-8.97	52.51	47.87	74.00	54.00	-6.13	AVG	H
1626.67	59.42	50.49	-7.59	51.83	42.90	74.00	54.00	-11.10	AVG	H
1873.33	58.39	51.73	-5.32	53.08	46.41	74.00	54.00	-7.59	AVG	H
2273.33	57.48	52.95	-3.34	54.14	49.61	74.00	54.00	-4.39	AVG	H
3333.33	49.37	---	-1.15	48.22	---	74.00	54.00	-5.78	Peak	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1500.00	60.88	52.61	-8.76	52.12	43.85	74.00	54.00	-10.15	AVG	V
1620.00	59.92	51.47	-7.65	52.26	43.82	74.00	54.00	-10.18	AVG	V
1750.00	60.11	49.16	-6.46	53.65	42.70	74.00	54.00	-11.30	AVG	V
1873.33	59.20	52.75	-5.32	53.89	47.43	74.00	54.00	-6.57	AVG	V
2000.00	57.60	48.94	-4.15	53.45	44.79	74.00	54.00	-9.21	AVG	V
5000.00	53.49	52.07	1.12	54.61	53.19	74.00	54.00	-0.81	AVG	V
1250.00	60.91	---	-9.18	51.74	---	74.00	54.00	-2.26	Peak	H
1350.00	59.84	---	-9.01	50.83	---	74.00	54.00	-3.17	Peak	H
1423.33	60.00	---	-8.89	51.12	---	74.00	54.00	-22.88	Peak	H
1623.33	59.47	52.16	-7.62	51.85	44.54	74.00	54.00	-9.55	AVG	H
2000.00	59.94	55.34	-4.15	55.79	51.19	74.00	54.00	-2.81	AVG	H
5000.00	50.27	---	1.12	51.39	---	74.00	54.00	-2.61	Peak	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1250.00	62.48	56.71	-9.18	53.30	47.53	74.00	54.00	-6.47	AVG	V
1500.00	60.41	54.49	-8.76	51.65	45.73	74.00	54.00	-8.27	AVG	V
1626.67	59.15	53.48	-7.59	51.56	45.89	74.00	54.00	-8.11	AVG	V
1750.00	61.04	55.05	-6.46	54.58	48.59	74.00	54.00	-5.41	AVG	V
2250.00	59.05	50.68	-3.41	55.65	47.27	74.00	54.00	-6.73	AVG	V
2373.33	58.52	51.99	-3.04	55.48	48.95	74.00	54.00	-5.05	AVG	V
1140.00	58.52	---	-9.36	49.16	---	74.00	54.00	-4.84	Peak	H
1250.00	61.36	58.84	-9.18	52.18	49.66	74.00	54.00	-4.34	AVG	H
1373.33	60.94	54.43	-8.97	51.97	45.46	74.00	54.00	-8.54	AVG	H
1500.00	61.63	53.54	-8.76	52.87	44.78	74.00	54.00	-9.22	AVG	H
3716.67	49.39	---	-0.42	48.97	---	74.00	54.00	-5.03	Peak	H
4000.00	50.53	---	0.49	51.02	---	74.00	54.00	-2.98	Peak	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1136.67	61.53	59.03	-9.36	52.17	49.67	74.00	54.00	-4.33	AVG	V
1250.00	61.96	56.77	-9.18	52.79	47.59	74.00	54.00	-6.41	AVG	V
2250.00	59.29	50.71	-3.41	55.88	47.30	74.00	54.00	-6.70	AVG	V
3250.00	52.55	---	-1.16	51.39	---	74.00	54.00	-2.61	Peak	V
4000.00	53.98	51.00	0.49	54.47	51.49	74.00	54.00	-2.51	AVG	V
5000.00	53.48	50.82	1.12	54.60	51.94	74.00	54.00	-2.06	AVG	V
1020.00	61.61	56.45	-9.56	52.05	46.89	74.00	54.00	-7.11	AVG	H
1250.00	61.67	58.11	-9.18	52.50	48.93	74.00	54.00	-5.07	AVG	H
1423.33	61.71	52.73	-8.89	52.82	43.84	74.00	54.00	-10.16	AVG	H
1500.00	62.27	51.49	-8.76	53.51	42.73	74.00	54.00	-11.27	AVG	H
1626.67	59.75	55.94	-7.59	52.16	48.35	74.00	54.00	-5.65	AVG	H
4000.00	51.39	---	0.49	51.88	---	74.00	54.00	-2.12	Peak	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1130.00	61.53	59.71	-9.37	52.16	50.34	74.00	54.00	-3.66	AVG	V
1250.00	61.66	52.40	-9.18	52.49	43.22	74.00	54.00	-10.78	AVG	V
1500.00	61.66	53.17	-8.76	52.90	44.41	74.00	54.00	-9.59	AVG	V
1623.33	61.14	50.70	-7.62	53.51	43.08	74.00	54.00	-10.92	AVG	V
2000.00	61.11	51.26	-4.15	56.96	47.11	74.00	54.00	-6.89	AVG	V
2600.00	60.13	48.35	-2.37	57.76	45.98	74.00	54.00	-8.02	AVG	V
1250.00	61.38	58.14	-9.18	52.21	48.96	74.00	54.00	-5.04	AVG	H
1500.00	63.51	56.79	-8.76	54.75	48.03	74.00	54.00	-5.97	AVG	H
2606.67	65.18	52.09	-2.35	62.84	49.74	74.00	54.00	-4.26	AVG	H
4000.00	50.05	---	0.49	50.54	---	74.00	54.00	-3.46	Peak	H
7308.33	52.13	41.37	5.29	57.43	46.66	74.00	54.00	-7.34	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH High **Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1250.00	61.84	56.77	-9.18	52.67	47.59	74.00	54.00	-6.41	AVG	V
1500.00	62.15	58.01	-8.76	53.39	49.25	74.00	54.00	-4.75	AVG	V
1623.33	61.46	54.13	-7.62	53.84	46.51	74.00	54.00	-7.49	AVG	V
3250.00	52.56	---	-1.16	51.40	---	74.00	54.00	-2.60	Peak	V
4000.00	56.24	52.00	0.49	56.73	52.49	74.00	54.00	-1.51	AVG	V
5000.00	53.49	50.71	1.12	54.61	51.83	74.00	54.00	-2.17	AVG	V
1020.00	61.21	57.10	-9.56	51.65	47.54	74.00	54.00	-6.46	AVG	H
1250.00	60.96	55.71	-9.18	51.78	46.53	74.00	54.00	-7.47	AVG	H
1376.67	61.09	58.35	-8.96	52.13	49.39	74.00	54.00	-4.61	AVG	H
1500.00	63.83	57.12	-8.76	55.07	48.36	74.00	54.00	-5.64	AVG	H
2000.00	59.42	52.76	-4.15	55.27	48.61	74.00	54.00	-5.39	AVG	H
2620.00	60.47	50.93	-2.31	58.16	48.62	74.00	54.00	-5.38	AVG	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Test Date: October 6, 2010

Temperature: 25°C

Tested by: Tom Jen

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1250.00	60.83	58.06	-9.18	51.66	48.88	74.00	54.00	-5.12	AVG	V
1500.00	62.65	56.12	-8.76	53.89	47.36	74.00	54.00	-6.64	AVG	V
1623.33	61.15	54.74	-7.62	53.53	47.12	74.00	54.00	-6.88	AVG	V
1873.33	59.28	53.10	-5.32	53.96	47.78	74.00	54.00	-6.22	AVG	V
2250.00	58.45	51.65	-3.41	55.04	48.24	74.00	54.00	-5.76	AVG	V
2500.00	60.28	54.65	-2.66	57.62	51.99	74.00	54.00	-2.01	AVG	V
1250.00	61.21	57.12	-9.18	52.04	47.94	74.00	54.00	-6.06	AVG	H
1373.33	61.12	53.89	-8.97	52.15	44.92	74.00	54.00	-9.08	AVG	H
1500.00	62.60	55.37	-8.76	53.84	46.61	74.00	54.00	-7.39	AVG	H
1626.67	59.35	50.12	-7.59	51.76	42.53	74.00	54.00	-11.47	AVG	H
2500.00	61.55	54.08	-2.66	58.89	51.42	74.00	54.00	-2.58	AVG	H
2583.33	61.03	44.20	-2.42	58.61	41.78	74.00	54.00	-12.22	AVG	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode
/ CH Mid**Test Date:** October 6, 2010**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1250.00	61.74	57.32	-9.18	52.57	48.14	74.00	54.00	-5.86	AVG	V
1373.33	59.88	55.11	-8.97	50.91	46.14	74.00	54.00	-7.86	AVG	V
1500.00	61.83	55.61	-8.76	53.07	46.85	74.00	54.00	-7.15	AVG	V
1626.67	61.06	55.28	-7.59	53.47	47.69	74.00	54.00	-6.31	AVG	V
1873.33	59.33	53.02	-5.32	54.01	47.70	74.00	54.00	-6.30	AVG	V
2000.00	59.82	46.23	-4.15	55.67	42.08	74.00	54.00	-11.92	AVG	V
1020.00	60.94	45.32	-9.56	51.38	35.76	74.00	54.00	-18.24	AVG	H
1250.00	61.34	56.72	-9.18	52.16	47.54	74.00	54.00	-6.46	AVG	H
1373.33	61.29	53.54	-8.97	52.32	44.57	74.00	54.00	-9.43	AVG	H
1623.33	58.94	52.18	-7.62	51.32	44.56	74.00	54.00	-9.44	AVG	H
4000.00	50.84	---	0.49	51.33	---	74.00	54.00	-2.67	Peak	H
4458.33	50.02	---	1.21	51.23	---	74.00	54.00	-2.77	Peak	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH High

Test Date: October 6, 2010

Temperature: 25°C

Tested by: Tom Jen

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1130.00	59.56	---	-9.37	50.19	---	74.00	54.00	-3.81	Peak	V
1166.67	59.91	---	-9.31	50.59	---	74.00	54.00	-3.41	Peak	V
1250.00	61.78	57.25	-9.18	52.61	48.07	74.00	54.00	-5.93	AVG	V
1500.00	62.01	58.66	-8.76	53.25	49.90	74.00	54.00	-4.10	AVG	V
1623.33	62.45	54.94	-7.62	54.83	47.32	74.00	54.00	-6.68	AVG	V
2500.00	61.06	54.21	-2.66	58.40	51.55	74.00	54.00	-2.45	AVG	V
1016.67	62.65	45.64	-9.56	53.09	36.08	74.00	54.00	-17.92	AVG	H
1250.00	61.43	56.82	-9.18	52.25	47.64	74.00	54.00	-6.36	AVG	H
1373.33	61.71	54.57	-8.97	52.74	45.60	74.00	54.00	-8.40	AVG	H
1500.00	63.00	56.73	-8.76	54.24	47.97	74.00	54.00	-6.03	AVG	H
2606.67	61.10	46.36	-2.35	58.75	44.01	74.00	54.00	-9.99	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** September 30, 2010`
Temperature: 26°C **Tested by:** Benson Yang
Humidity: 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1650	56.00	42.84	0.08	56.08	42.92	65.20	55.20	-9.12	-12.28	L1
0.2200	48.36	34.82	0.08	48.44	34.90	62.82	52.82	-14.38	-17.92	L1
0.2750	43.20	32.19	0.08	43.28	32.27	60.96	50.96	-17.68	-18.69	L1
0.3950	37.15	31.91	0.09	37.24	32.00	57.96	47.96	-20.72	-15.96	L1
13.0100	44.02	36.99	0.66	44.68	37.65	60.00	50.00	-15.32	-12.35	L1
19.4900	44.60	38.79	0.92	45.52	39.71	60.00	50.00	-14.48	-10.29	L1
0.1600	57.62	45.76	0.08	57.70	45.84	65.46	55.46	-7.76	-9.62	L2
0.2200	50.40	36.60	0.08	50.48	36.68	62.82	52.82	-12.34	-16.14	L2
0.2700	45.20	33.74	0.07	45.27	33.81	61.12	51.12	-15.85	-17.31	L2
0.3250	38.90	27.28	0.07	38.97	27.35	59.58	49.58	-20.61	-22.23	L2
13.0300	41.90	36.70	0.66	42.56	37.36	60.00	50.00	-17.44	-12.64	L2
19.5316	40.80	38.43	0.93	41.73	39.36	60.00	50.00	-18.27	-10.64	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

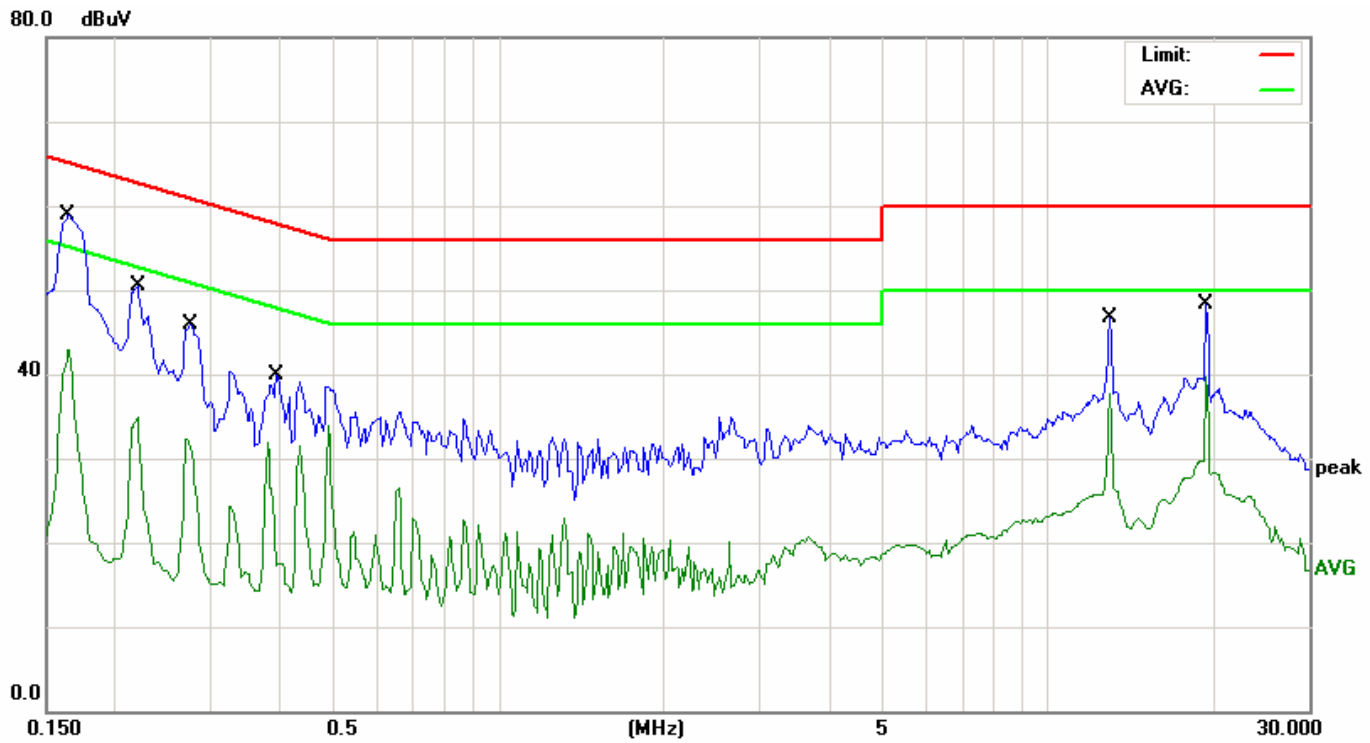

Conducted emissions (Line 2)

