



RADIO TEST REPORT

FCC ID : LDK-RUSS9105AXW
Equipment : Catalyst 9105AX 802.11ax Access Point
Brand Name : Cisco
Model Name : C9105AXW-B, C9105AXW-C, C9105AXW-D,
C9105AXW-F, C9105AXW-N, C9105AXW-S,
C9105AXW-K, C9105AXW-x
(Refer to section 1.1.5 for more details)
Applicant : Cisco Systems, Inc.
125 West Tasman Drive, San Jose, California,
United States, 95134-1706
Manufacturer : Cisco Systems, Inc.
125 West Tasman Drive, San Jose, California,
United States, 95134-1706
Standard : 47 CFR FCC Part 15.247

The product was received on Feb. 27, 2020, and testing was started from Mar. 05, 2020 and completed on Jul. 08, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.


Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards9

1.3 Testing Location Information9

1.4 Measurement Uncertainty10

2 Test Configuration of EUT11

2.1 Test Channel Mode11

2.2 The Worst Case Measurement Configuration12

2.3 EUT Operation during Test13

2.4 Accessories14

2.5 Support Equipment.....14

2.6 Test Setup Diagram15

3 Transmitter Test Result18

3.1 AC Power-line Conducted Emissions18

3.2 DTS Bandwidth20

3.3 Maximum Conducted Output Power21

3.4 Power Spectral Density24

3.5 Emissions in Non-restricted Frequency Bands26

3.6 Emissions in Restricted Frequency Bands.....27

4 Test Equipment and Calibration Data32

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of DTS Bandwidth

Appendix C. Test Results of Maximum Conducted Output Power

Appendix D. Test Results of Power Spectral Density

Appendix E. Test Results of Emissions in Non-restricted Frequency Bands

Appendix F. Test Results of Emissions in Restricted Frequency Bands

Appendix G. Test Results of Radiated Emission Co-location

Appendix H. Test Photos

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Note: Reference to Sporton Project No.: FR992017-02

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Jessie Wei



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), ax (HEW20)	2412-2462	1-11 [11]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX, 2TX
2.4-2.4835GHz	802.11g	20	1TX, 2TX
2.4-2.4835GHz	802.11n HT20	20	1TX, 2TX
2.4-2.4835GHz	802.11n HT20-BF	20	2TX
2.4-2.4835GHz	802.11ax HEW20	20	1TX, 2TX
2.4-2.4835GHz	802.11ax HEW20-BF	20	2TX

Note:

- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g, HT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- HEW20 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	PEGATRON	WIFI_1 ant	PIFA	I-PEX	Note 1
2	2	PEGATRON	WIFI_2 ant	PIFA	I-PEX	
3	1	PEGATRON	BLE ant	PIFA	I-PEX	

Note 1:

Ant.	Port	WLAN 2.4GHz Gain (dBi)							
		2400 MHz	2412 MHz	2437 MHz	2442 MHz	2450 MHz	2462 MHz	2472 MHz	2500 MHz
1	1	2.02	1.81	2.25	2.37	2.51	2.48	2.20	2.14
2	2	1.55	1.63	2.10	2.23	2.20	2.07	1.75	1.99

Ant.	Port	WLAN 5GHz Gain (dBi)							
		5150 MHz	5250 MHz	5350 MHz	5470 MHz	5500 MHz	5600 MHz	5725 MHz	5850 MHz
1	1	4.91	4.97	4.88	4.93	4.82	4.73	4.78	4.93
2	2	4.58	4.76	4.60	4.41	4.35	4.25	4.40	4.56

Ant.	Port	BT Gain (dBi)							
		2400 MHz	2412 MHz	2437 MHz	2442 MHz	2450 MHz	2462 MHz	2472 MHz	2500 MHz
3	1	2.47	2.45	2.55	2.70	2.69	2.64	2.58	2.62

Note 2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$Directional\ iGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$
BF		$Directional\ iGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ iGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$NSS1(g1,1) = 10^{G1/20}$; $NSS1(g1,2) = 10^{G2/20}$;

$g_{j,k} = (Nss1(g1,1) + Nss1(g1,2))$

$DG = 10 \log[(Nss1(g1,1) + Nss1(g1,2) / N_{ANT})] => 10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$

Where ;

$G1 = 10$; $G2 = 10$; $G3 = 10$; $G4 = 10$;



2.4G

2412MHz G1 = 1.81dBi ; G2 = 1.63dBi ;2T1S DG=4.73 dBi 2T2S DG=1.72 dBi
2437MHz G1 = 2.25dBi ; G2 = 2.1dBi ;2T1S DG=5.19 dBi 2T2S DG=2.18 dBi
2462MHz G1 = 2.48dBi ; G2 = 2.07dBi ;2T1S DG=5.29 dBi 2T2S DG=2.28 dBi

5G

5180MHz G1 = 4.91dBi ; G2 = 4.58dBi ;2T1S DG=7.76 dBi 2T2S DG=4.75 dBi
5200MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5240MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5260MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5300MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5320MHz G1 = 4.88dBi ; G2 = 4.6dBi ;2T1S DG=7.75 dBi 2T2S DG=4.74 dBi
5500MHz G1 = 4.82dBi ; G2 = 4.35dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5580MHz G1 = 4.73dBi ; G2 = 4.25dBi ;2T1S DG=7.5 dBi 2T2S DG=4.5 dBi
5700MHz G1 = 4.78dBi ; G2 = 4.4dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5720MHz G1 = 4.78dBi ; G2 = 4.4dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5745MHz G1 = 4.78dBi ; G2 = 4.56dBi ;2T1S DG=7.6 dBi 2T2S DG=4.67 dBi
5785MHz G1 = 4.78dBi ; G2 = 4.56dBi ;2T1S DG=7.6 dBi 2T2S DG=4.67 dBi
5825MHz G1 = 4.93dBi ; G2 = 4.56dBi ;2T1S DG=7.76 dBi 2T2S DG=4.75 dBi
5190MHz G1 = 4.91dBi ; G2 = 4.58dBi ;2T1S DG=7.76 dBi 2T2S DG=4.75 dBi
5230MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5270MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5310MHz G1 = 4.88dBi ; G2 = 4.6dBi ;2T1S DG=7.75 dBi 2T2S DG=4.74 dBi
5510MHz G1 = 4.82dBi ; G2 = 4.35dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5550MHz G1 = 4.82dBi ; G2 = 4.35dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5670MHz G1 = 4.78dBi ; G2 = 4.4dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5710MHz G1 = 4.78dBi ; G2 = 4.4dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5755MHz G1 = 4.78dBi ; G2 = 4.4dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5795MHz G1 = 4.93dBi ; G2 = 4.56dBi ;2T1S DG=7.76 dBi 2T2S DG=4.75 dBi
5210MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5290MHz G1 = 4.97dBi ; G2 = 4.76dBi ;2T1S DG=7.88 dBi 2T2S DG=4.87 dBi
5530MHz G1 = 4.82dBi ; G2 = 4.35dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5610MHz G1 = 4.73dBi ; G2 = 4.25dBi ;2T1S DG=7.5 dBi 2T2S DG=4.5 dBi
5690MHz G1 = 4.78dBi ; G2 = 4.4dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi
5775MHz G1 = 4.78dBi ; G2 = 4.4dBi ;2T1S DG=7.6 dBi 2T2S DG=4.59 dBi

Note 4:

For 2.4GHz function:

For IEEE 802.11 b/g/n/ax (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For IEEE 802.11 b/g/n/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For IEEE 802.11a/n/ac/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Bluetooth function:

Only Port 1 can be used as transmitting/receiving antenna.



1.1.3 Mode Test Duty Cycle

<2T1S>

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	0.915	0.39	1.441m	1k
802.11g	0.99	0.04	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW20	0.984	0.07	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW20-BF	0.984	0.07	n/a (DC>=0.98)	n/a (DC>=0.98)

<2T2S>

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11ax HEW20	0.986	0.06	n/a (DC>=0.98)	n/a (DC>=0.98)

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming	The product has beamforming function for n/ax in 2.4GHz and a/n/ac/ax in 5GHz.	
Function	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point		
Test Software Version	17.18.2 (r782430 WLTEST) 、TeraTerm V4.75			

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description
C9105AXW-B	All the models are identical, the difference model for difference marketing strategy.
C9105AXW-C	
C9105AXW-D	
C9105AXW-F	
C9105AXW-N	
C9105AXW-S	
C9105AXW-K	
C9105AXW-x (x can be A-Z, regional country code)	

Note 1: From the above models, model: C9105AXW-B was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15.247
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 558074 D01 v05r02
- ◆ FCC KDB 662911 D01 v02r01
- ◆ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (other test items)	TH01-CB	Owen Hsu	20.5~22 / 49~53	Mar. 05, 2020~ Mar. 27, 2020
RF Conducted (2T1S-802.11b-2437MHz)	TH03-CB	Owen Hsu	20.6~21.8 / 62~67	Jun. 22, 2022~ Jun. 28, 2022
Radiated (Cabinet-Above 1GHz)	03CH02-CB	Chris Li	23.8~24.9 / 55~58	Jun. 22, 2022~ Jul. 08, 2022
Radiated (Below 1GHz)	03CH05-CB	Chris Li	24.4~25.5 / 55~58	Jun. 22, 2022~ Jul. 08, 2022
Radiated (Radiated Emission Co-location)	03CH05-CB	Stim Sun	21.3~23.2 / 55~58	May 20, 2020
AC Conduction (Mode 1~2)	CO01-CB	GN Hou	23~24 / 63~65	May 11, 2020
AC Conduction (Mode 3)	CO01-CB	Dean Chang	22~23 / 53~54	Jul. 07, 2022

Note: The tested sample of the test item (Radiated below 1GHz, Radiated Cabinet above 1GHz, AC power-line conducted emissions-Mode 3, Emissions in Restricted Frequency Bands (Above 1GHz)-Bandedge/Harmonic-2T1S 802.11b-2437MHz) was received on Jun. 13, 2022.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

For AC Conduction(Mode 1~2), RF Conducted(other test items), Radiated(Radiated Emission Co-location)

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Conducted Emission	2.4 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	2.4 dB	Confidence levels of 95%
Bandwidth Measurement	2%	Confidence levels of 95%

For others test:

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	5.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.7 dB	Confidence levels of 95%
Conducted Emission	3.2 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

<2T1S>

Mode	Power Setting
802.11b_Nss1,(1Mbps)_2TX	-
2412MHz	17
2437MHz	17
2462MHz	17
802.11g_Nss1,(6Mbps)_2TX	-
2412MHz	15
2437MHz	17
2462MHz	15
802.11ax HEW20_Nss1,(MCS0)_2TX	-
2412MHz	15
2437MHz	17
2462MHz	14
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-
2412MHz	15
2437MHz	17
2462MHz	14

<2T2S>

Mode	Power Setting
802.11ax HEW20_Nss2,(MCS0)_2TX	-
2412MHz	15
2462MHz	15

Note:

- ◆ There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 11n/11ax in 2.4GHz and 11a/11n/11ac/11ax in 5GHz. Both modes have been tested and recorded in this test report.
- ◆ The STBC mode covered by 2T2S mode.
- ◆ The beamforming mode only evaluated power and power density.
- ◆ This function has 1TX/2TX, and only 2TX was test and record in the test report was declared by the manufacturer.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT+ PoE_2.4GHz
2	EUT+ PoE_5GHz
3	EUT+ PoE_Bluetooth LE
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands Emissions in Restricted Frequency Bands (Above 1GHz)
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.	
1	EUT in Y axis + PoE_Bluetooth LE
2	EUT in Y axis + PoE_2.4GHz
3	EUT in Y axis + PoE_5GHz
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX (Cabinet)
The EUT was performed at X axis, Y axis and Z axis position. The worst case was found at Y axis, thus the measurement will follow this same test configuration.	
1	EUT in Y axis_2.4GHz



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
The EUT was performed at X axis, Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.	
1	EUT in Y axis_WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + Bluetooth LE
Refer to Sporton Test Report No.: FA992017-11 for Co-location RF Exposure Evaluation.	

Note: The EUT was powered by PoE, and the PoE was for measurement only, it would not be marketed.

<For Conducted emissions, Radiated and RF Conducted (2T1S-802.11b-2437MHz)>

Equipment	Brand Name	Model Name	FCC ID
PoE	PHIHONG	POE29U-1AT(PL)	N/A

<For other tests>

Equipment	Brand Name	Model Name	FCC ID
PoE	CERIO	POE-G30	N/A

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Optional				
No.	Equipment Name	Brand Name	Model Name	Remark
1	Mounting bracket*1	PEGATRON	13BK-30N1601	-
2	Jumper cable*1	Tung-Li	1402-00WF000	Non-Shielded, 0.07m
3	Back cover*1	PEGATRON	13BK-30B0901	-
4	Spacer box*1	PEGATRON	13BK-30Q0701	-
5	RJ-45 cable*1	CISCO	72-101204-01	Non-Shielded, 1.5m

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE29U-1AT(PL)	N/A
B	Flash disk3.0	Transcend	JetFlash-700	N/A


For Radiated and RF Conducted (2T1S-802.11b-2437MHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	PP13S	N/A
B	PoE	PHIHONG	POE29U-1AT(PL)	N/A


For RF Conducted (other test items):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	CERIO	POE-G30	N/A
B	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

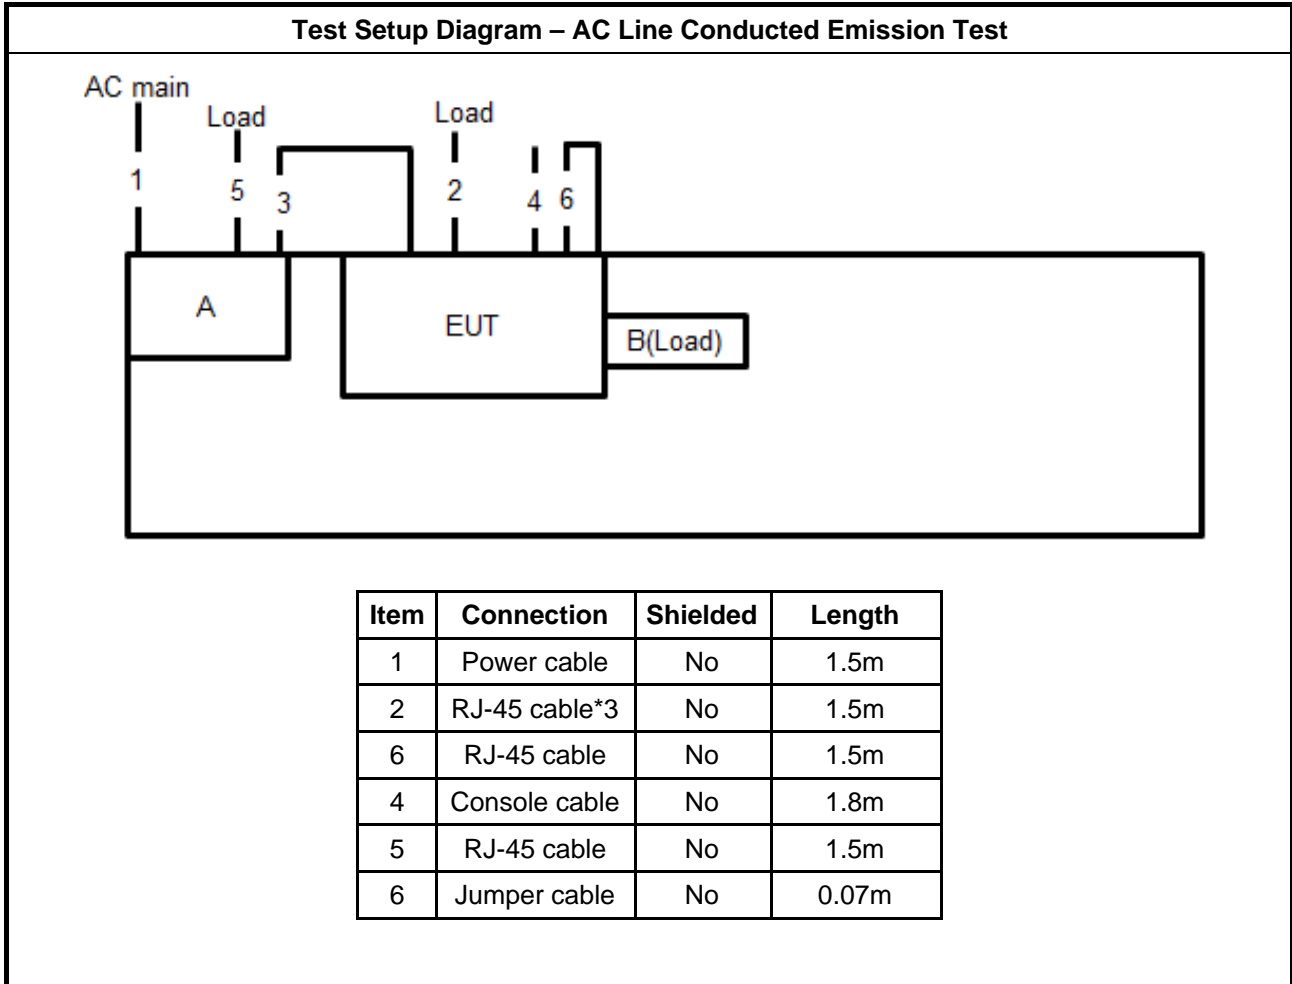


Test Setup Diagram - Radiated Test < 1GHz

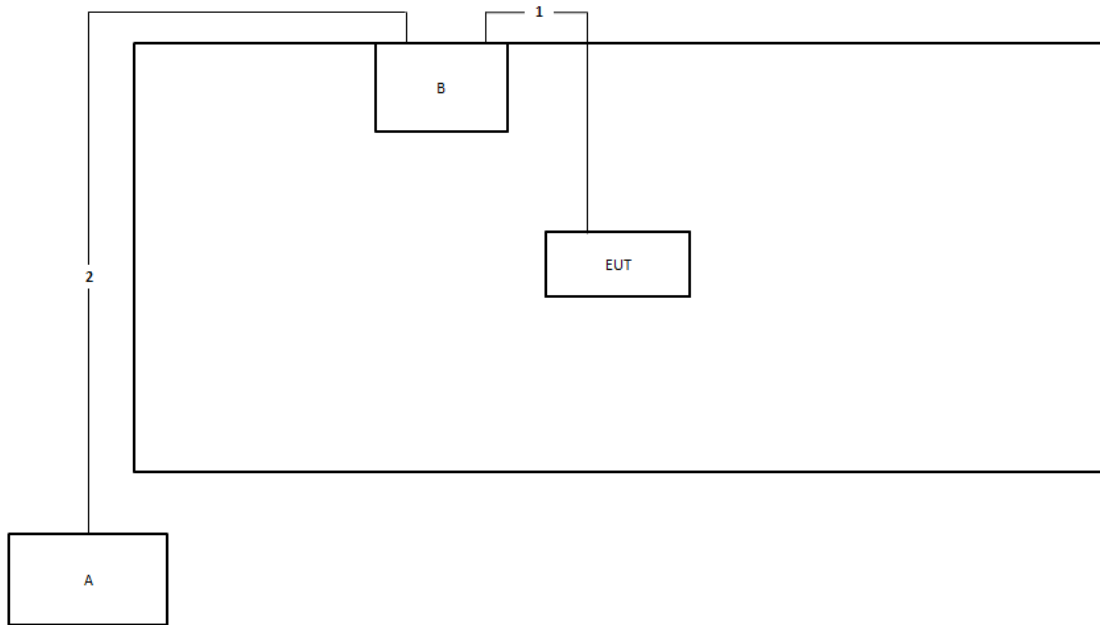

Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m

Test Setup Diagram - Radiated Test > 1GHz

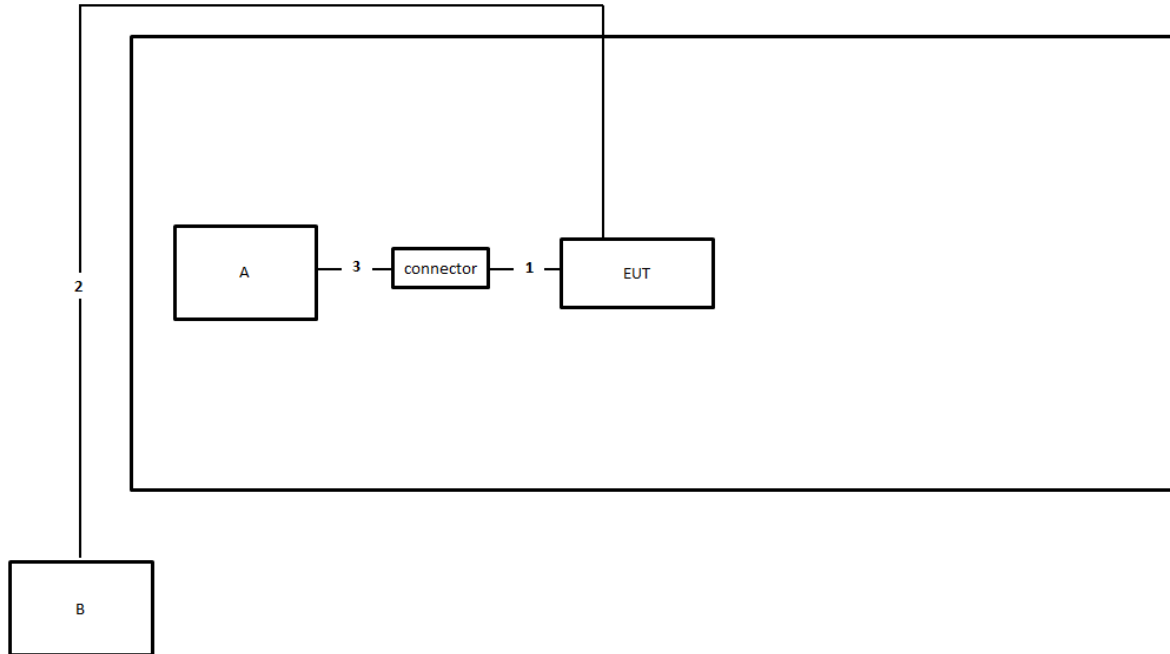

Item	Connection	Shielded	Length
1	Console cable (RS232 to RJ45)	No	1.6m
2	RJ-45 cable	No	10m
3	Console cable (RS232 to USB)	No	1.6m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

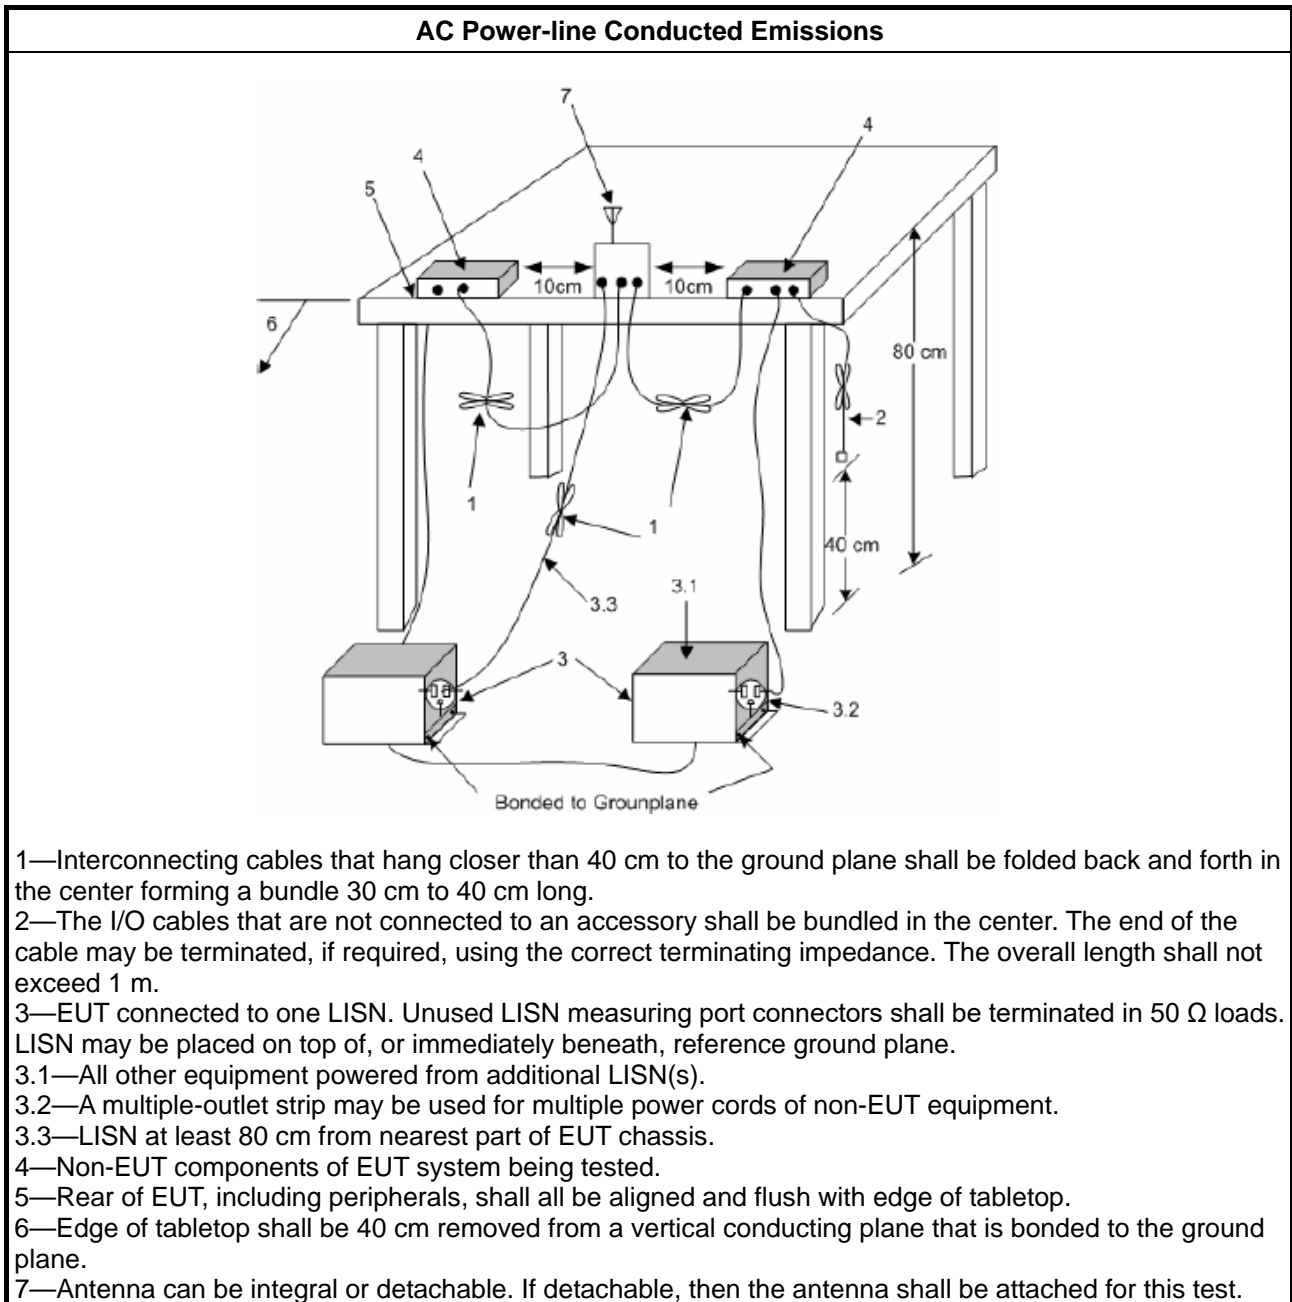

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

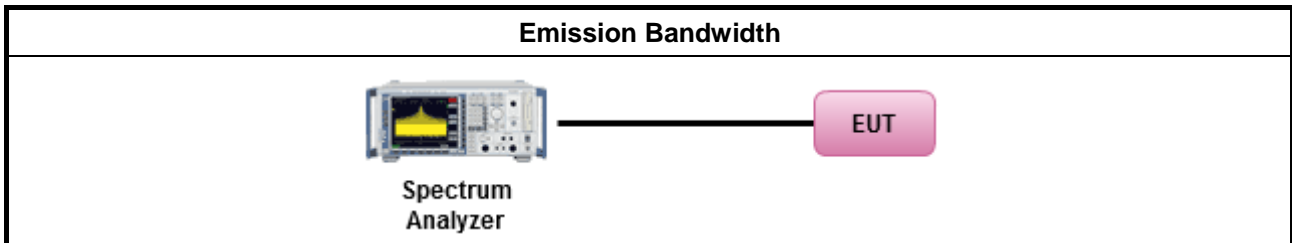

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
<p>P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.</p>	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> ▪ Maximum Conducted Output Power 	
[duty cycle ≥ 98% or external video / power trigger]	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
	<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

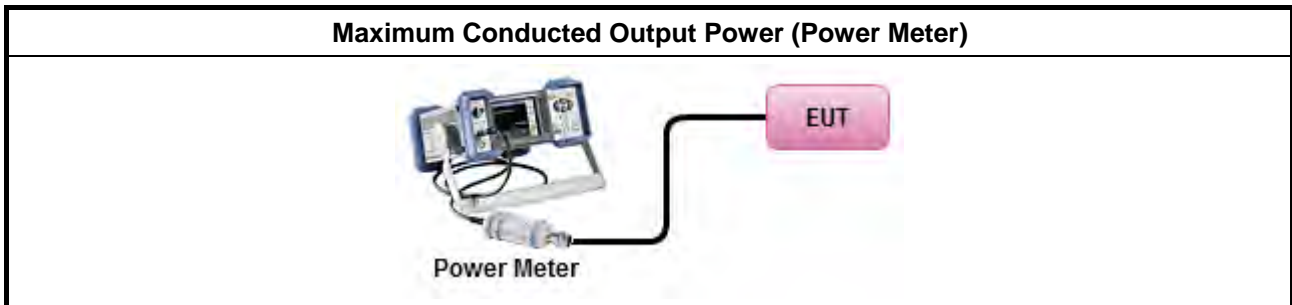

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method			
<ul style="list-style-type: none"> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option). 			
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.			
<ul style="list-style-type: none"> For conducted measurement. <ul style="list-style-type: none"> If The EUT supports multiple transmit chains using options given below: <table border="1"> <tbody> <tr> <td> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. </td> </tr> <tr> <td> <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, </td> </tr> <tr> <td> <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. </td> </tr> </tbody> </table> 	<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,	<input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.			
<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,			
<input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.			

3.4.4 Test Setup

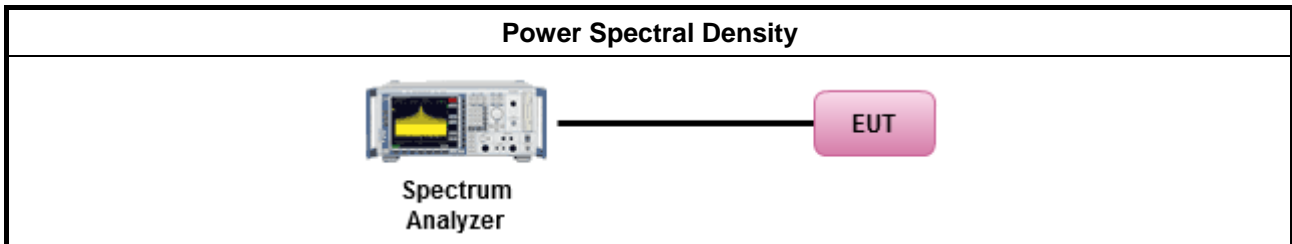

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

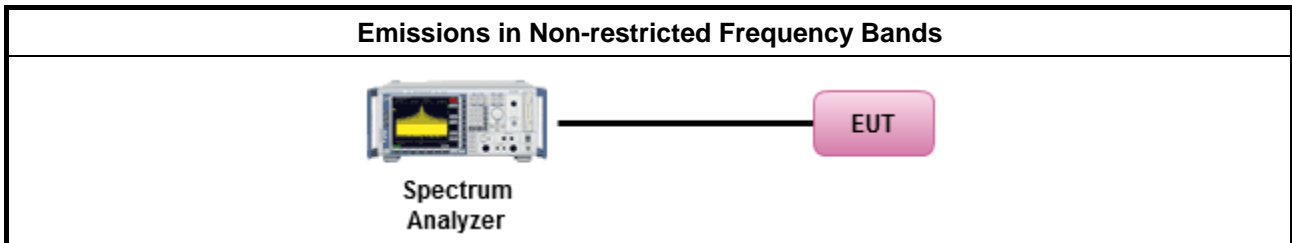

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures



Test Method	
<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. 	
<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. 	
<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle ≥98%).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW≥1/T).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> ▪ For the transmitter band-edge emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	<ul style="list-style-type: none"> ▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	<ul style="list-style-type: none"> ▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.



Test Method	
<ul style="list-style-type: none">▪ For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.2.	
	<ul style="list-style-type: none">▪ For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	<ul style="list-style-type: none">▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	<ul style="list-style-type: none">▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

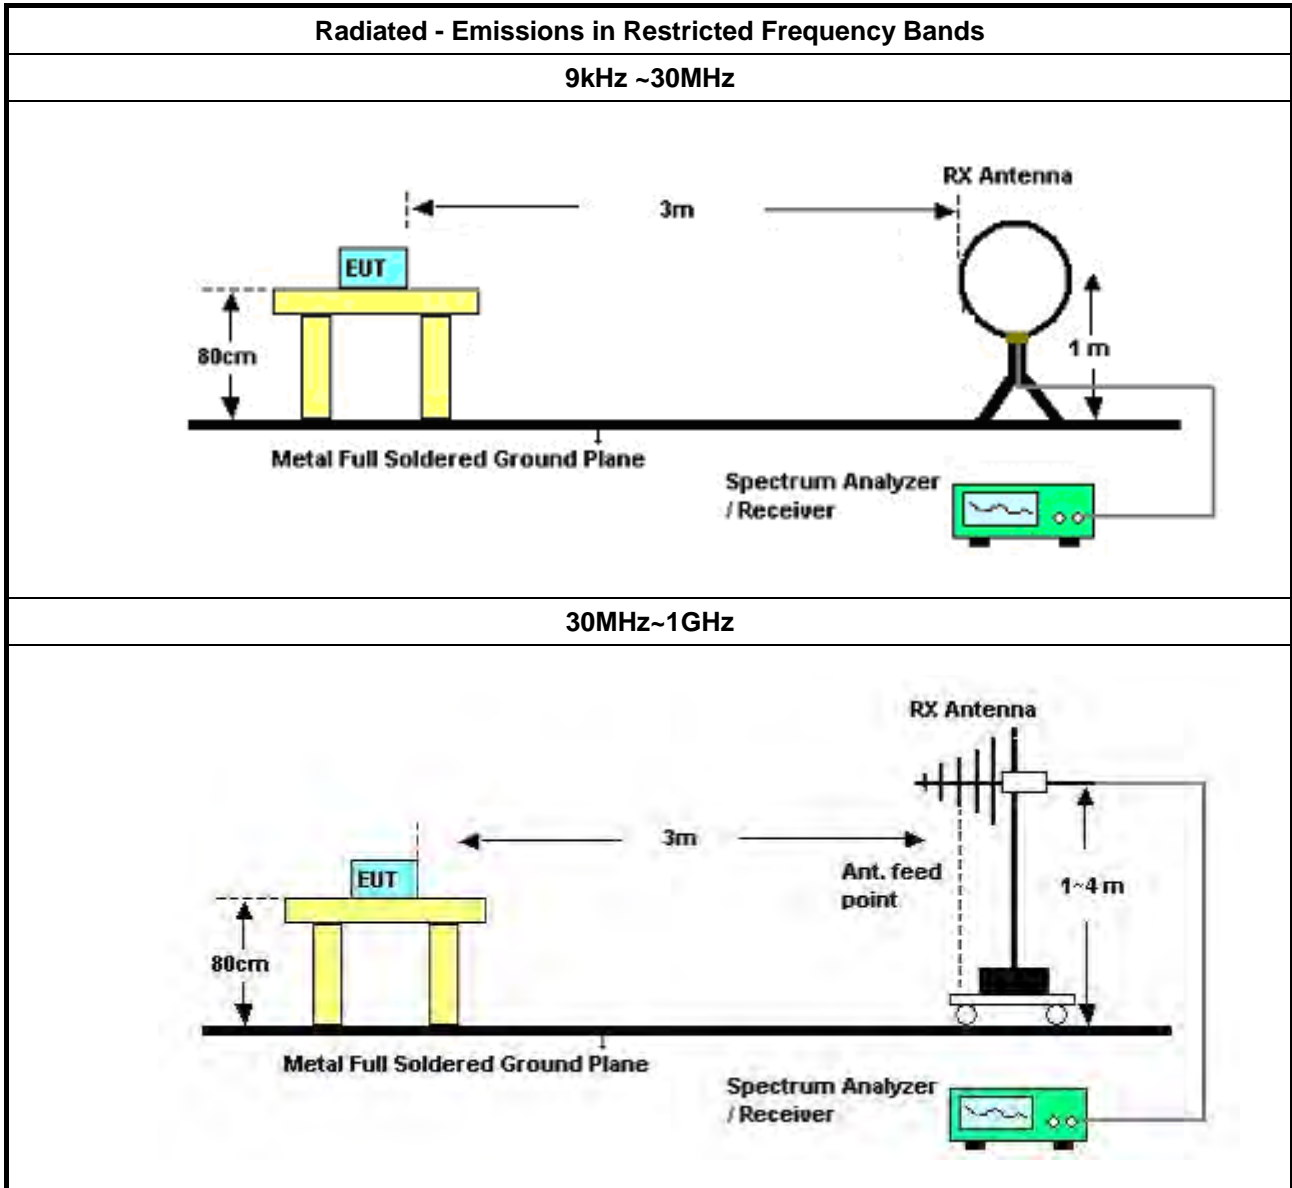

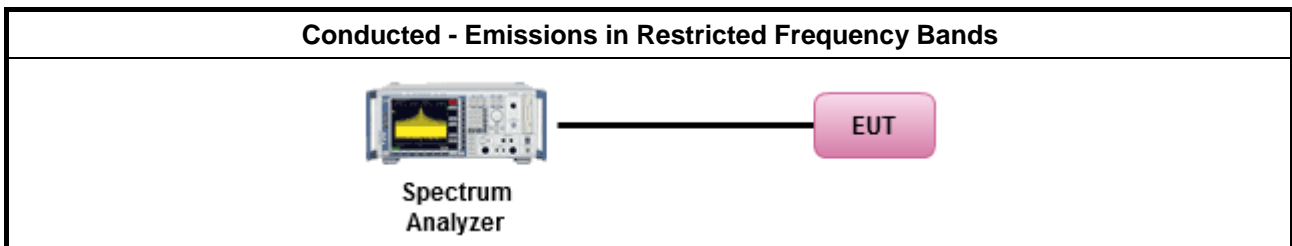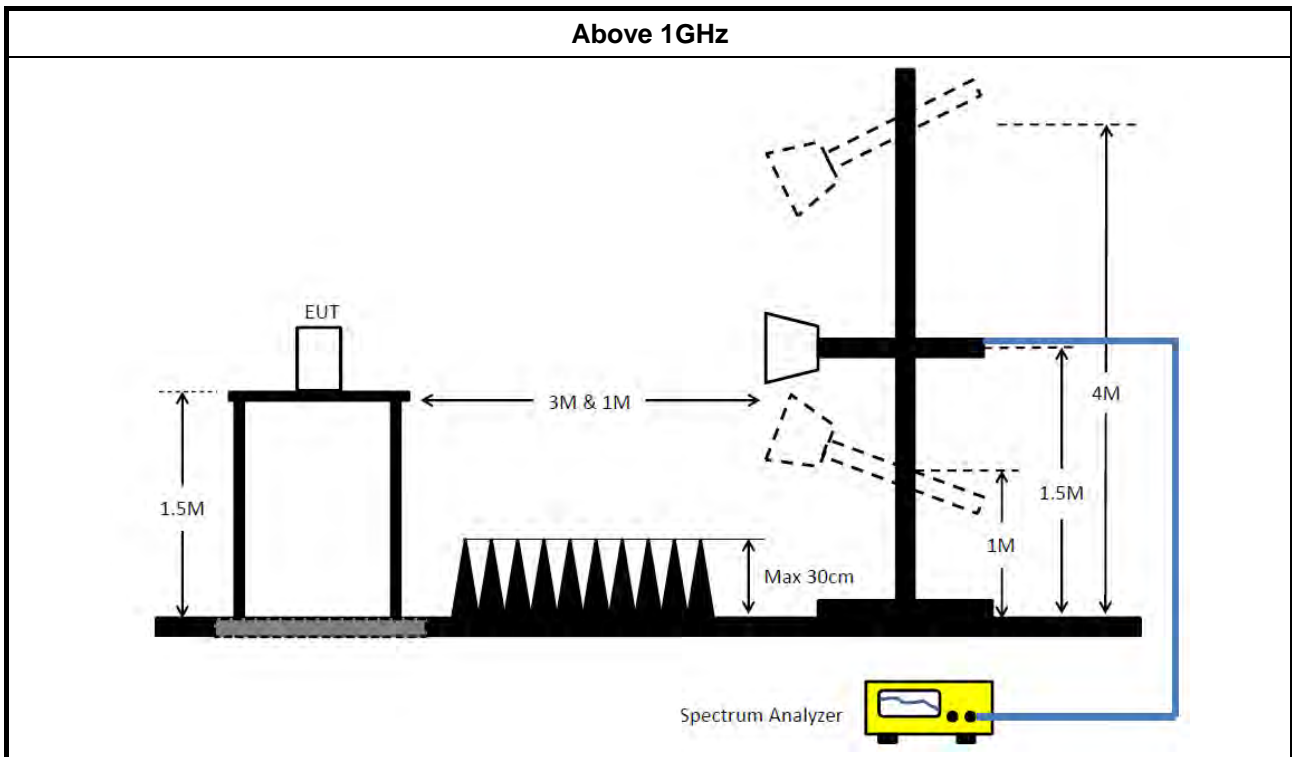

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Feb. 26, 2020	Feb. 25, 2021	Conduction (CO01-CB)
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 22, 2022	Feb. 21, 2023	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-1 6-2	04083	150kHz ~ 100MHz	Dec. 25, 2019	Dec. 24, 2020	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-1 6-2	04083	150kHz ~ 100MHz	Feb. 09, 2022	Feb. 08, 2023	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Feb. 25, 2020	Feb. 24, 2021	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 12, 2022	Apr. 11, 2023	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 31, 2020	Jan. 30, 2021	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 10, 2022	Feb. 09, 2023	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 21, 2019	May 20, 2020	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 18, 2022	May 17, 2023	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	May 14, 2022	May 13, 2023	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 09, 2021	Aug. 08, 2022	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Nov. 09, 2019	Nov. 08, 2020	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMC I	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 25, 2022	Mar. 24, 2023	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1291	1GHz~18GHz	Oct. 05, 2019	Oct. 04, 2020	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 12, 2019	Jun. 11, 2020	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 26, 2022	Apr. 25, 2023	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Apr. 15, 2020	Apr. 14, 2021	Radiation (03CH05-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 03, 2019	Jul. 02, 2020	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Aug. 15, 2019	Aug. 14, 2020	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Mar. 14, 2022	Mar. 13, 2023	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 17, 2022	Jun. 16, 2023	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 13, 2021	Oct. 12, 2022	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH05-CB)
Test Software	Audix	E3	6.120210m	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 26, 2022	Mar. 25, 2023	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 19, 2022	Apr. 18, 2023	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSU	100015	9kHz~26GHz	Oct. 25, 2021	Oct. 24, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 02, 2019	Jul. 01, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz –26.5 GHz	Nov. 18, 2019	Nov. 17, 2020	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 07, 2020	Feb. 06, 2021	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 07, 2020	Feb. 06, 2021	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 07, 2022	Jan. 06, 2023	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Aug. 22, 2021	Aug. 21, 2022	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Aug. 22, 2021	Aug. 21, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-11	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-12	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-13	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P1	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P2	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P3	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P4	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P5	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH03-CB)


Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 3	Pass	QP	217.5k	56.88	62.92	-6.04	Line

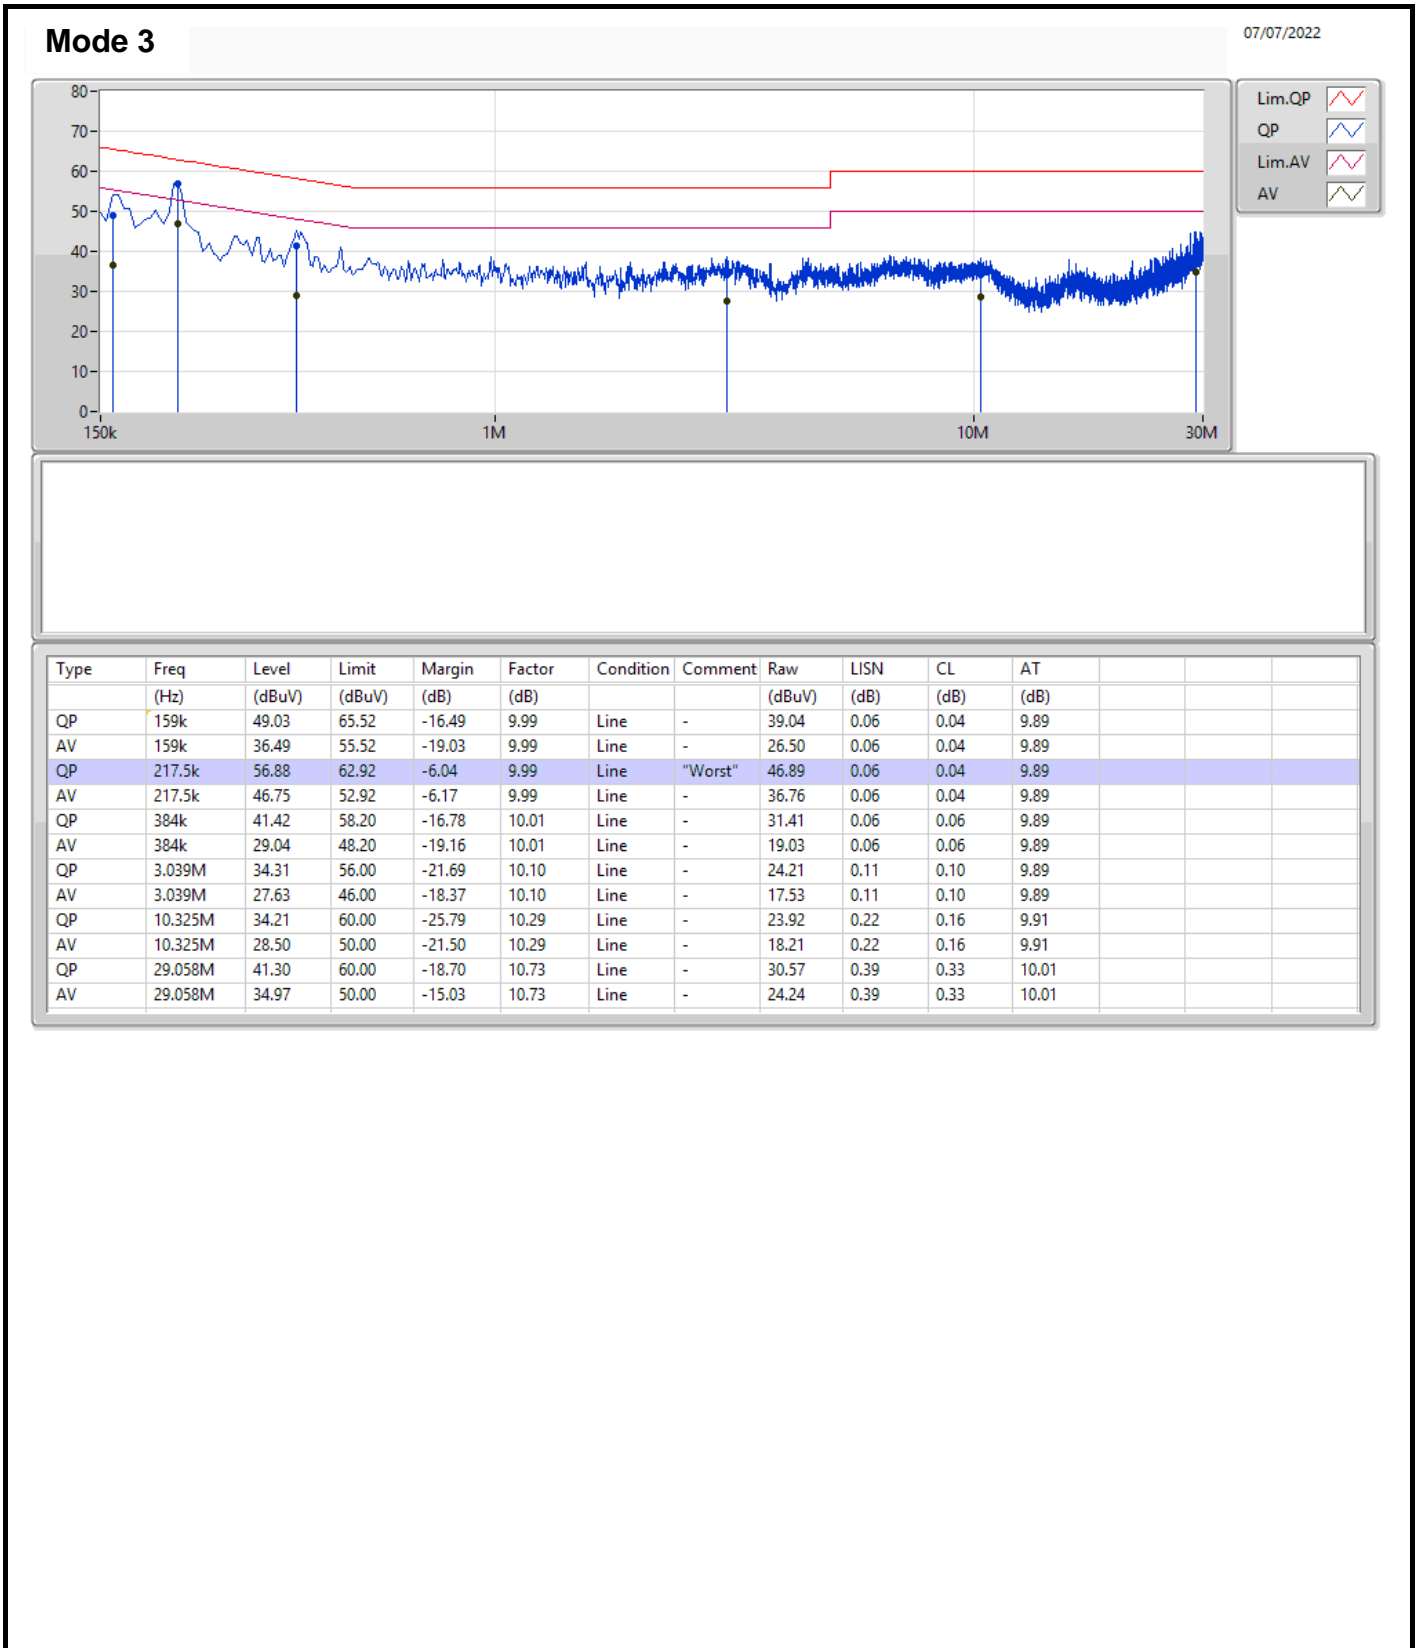

Mode 3

07/07/2022

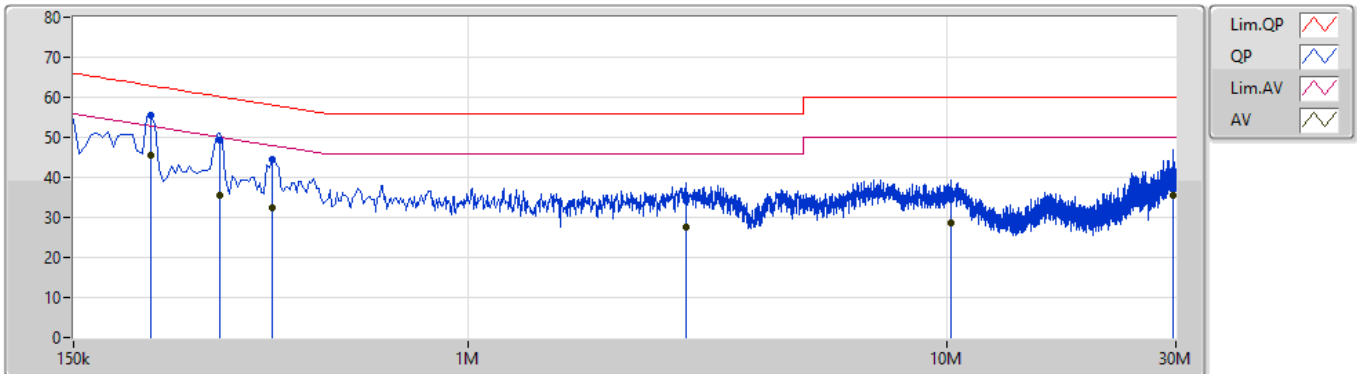

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	217.5k	55.65	62.92	-7.27	10.00	Neutral	"Worst"	45.65	0.07	0.04	9.89
AV	217.5k	45.36	52.92	-7.56	10.00	Neutral	-	35.36	0.07	0.04	9.89
QP	303k	49.46	60.17	-10.71	10.01	Neutral	-	39.45	0.07	0.05	9.89
AV	303k	35.62	50.17	-14.55	10.01	Neutral	-	25.61	0.07	0.05	9.89
QP	388.5k	44.33	58.10	-13.77	10.02	Neutral	-	34.31	0.07	0.06	9.89
AV	388.5k	32.36	48.10	-15.74	10.02	Neutral	-	22.34	0.07	0.06	9.89
QP	2.841M	34.05	56.00	-21.95	10.11	Neutral	-	23.94	0.12	0.10	9.89
AV	2.841M	27.42	46.00	-18.58	10.11	Neutral	-	17.31	0.12	0.10	9.89
QP	10.212M	34.50	60.00	-25.50	10.31	Neutral	-	24.19	0.24	0.16	9.91
AV	10.212M	28.70	50.00	-21.30	10.31	Neutral	-	18.39	0.24	0.16	9.91
QP	29.54M	41.84	60.00	-18.16	10.66	Neutral	-	31.18	0.31	0.33	10.02
AV	29.54M	35.56	50.00	-14.44	10.66	Neutral	-	24.90	0.31	0.33	10.02

<2T1S>

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	7.075M	10.32M	10M3G1D	7M	10.17M
802.11g_Nss1,(6Mbps)_2TX	16.375M	16.792M	16M8D1D	16.325M	16.667M
802.11ax HEW20_Nss1,(MCS0)_2TX	19.025M	19.04M	19MOD1D	18.95M	18.991M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	7.05M	10.32M	7.075M	10.295M
2437MHz	Pass	500k	7M	10.245M	7M	10.195M
2462MHz	Pass	500k	7.025M	10.245M	7.025M	10.17M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.325M	16.767M	16.375M	16.667M
2437MHz	Pass	500k	16.325M	16.792M	16.325M	16.717M
2462MHz	Pass	500k	16.325M	16.792M	16.375M	16.692M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.95M	19.04M	18.95M	19.015M
2437MHz	Pass	500k	19.025M	19.04M	18.95M	19.04M
2462MHz	Pass	500k	19M	19.04M	18.95M	18.991M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_2TX

EBW

2412MHz

05/03/2020

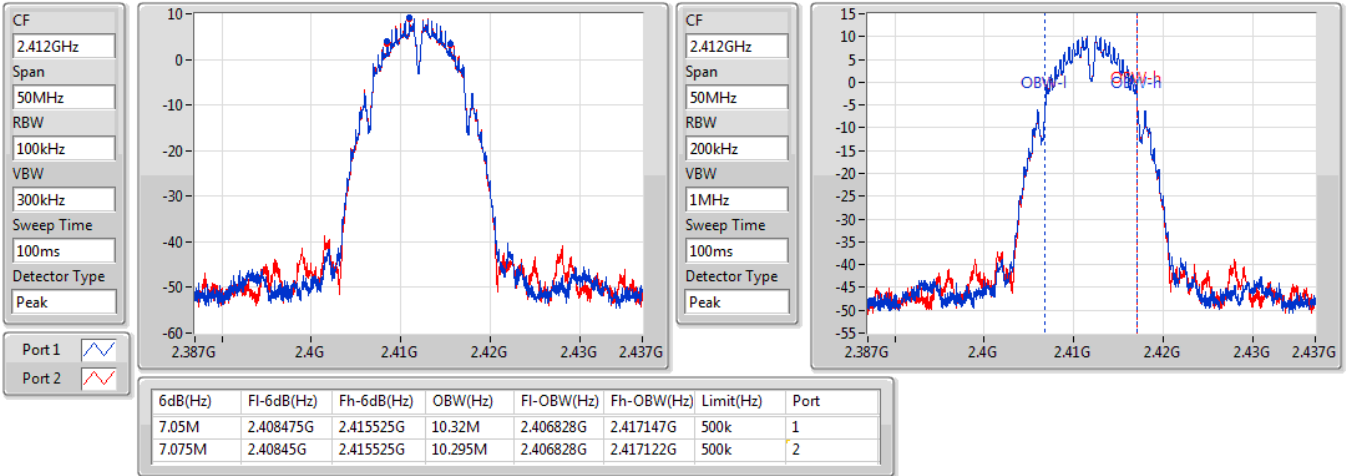


802.11b_Nss1,(1Mbps)_2TX

EBW

2437MHz

05/03/2020

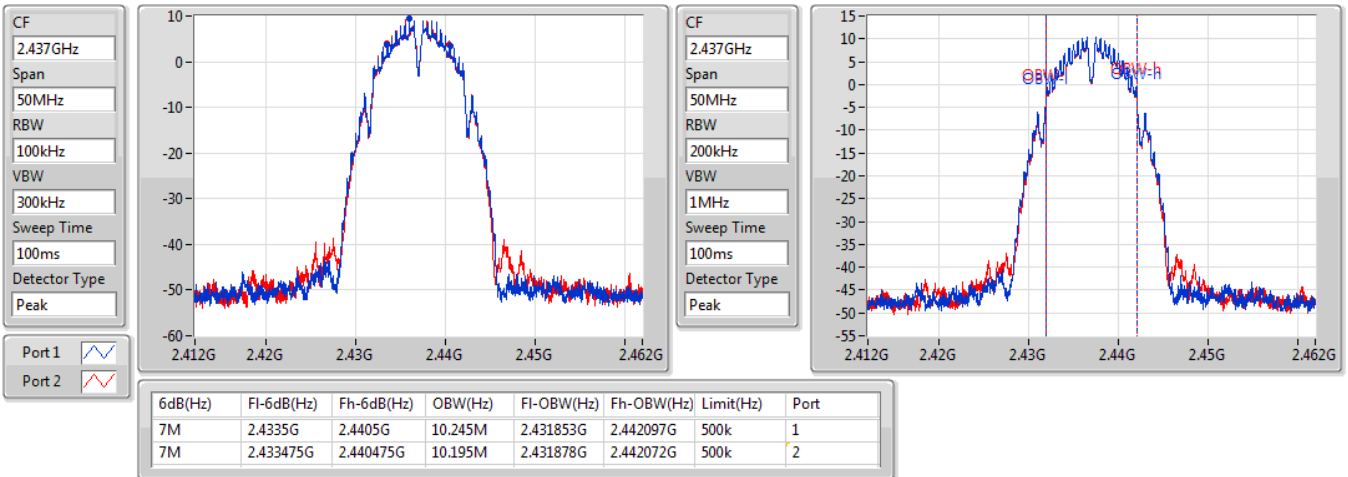


802.11b_Nss1,(1Mbps)_2TX

EBW


2462MHz

05/03/2020

CF
2.462GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

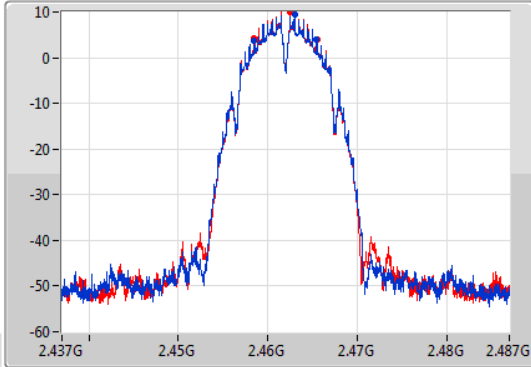

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

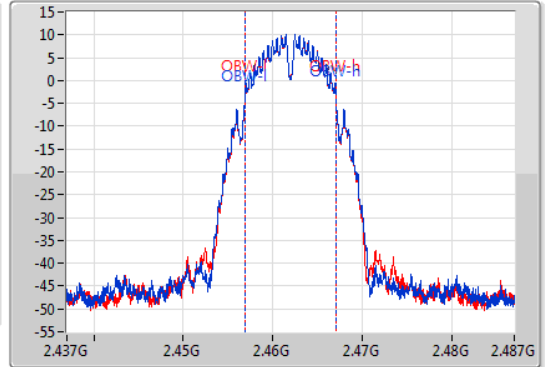

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
7.025M	2.45845G	2.465475G	10.245M	2.456853G	2.467097G	500k	1
7.025M	2.458475G	2.4655G	10.17M	2.456903G	2.467072G	500k	2


802.11g_Nss1,(6Mbps)_2TX

EBW


2412MHz

05/03/2020

CF
2.412GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

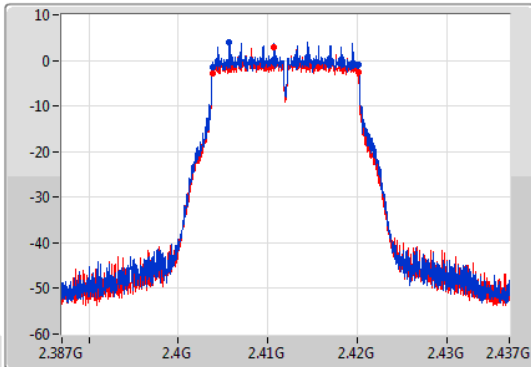

CF
2.412GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

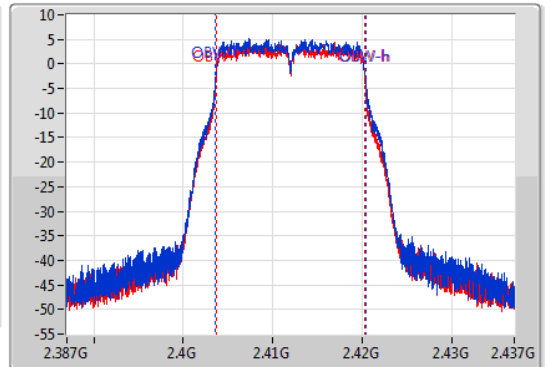

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.325M	2.403825G	2.42015G	16.767M	2.403629G	2.420396G	500k	1
16.375M	2.4038G	2.420175G	16.667M	2.403654G	2.420321G	500k	2


802.11g_Nss1,(6Mbps)_2TX

EBW


2437MHz

05/03/2020

CF
2.437GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

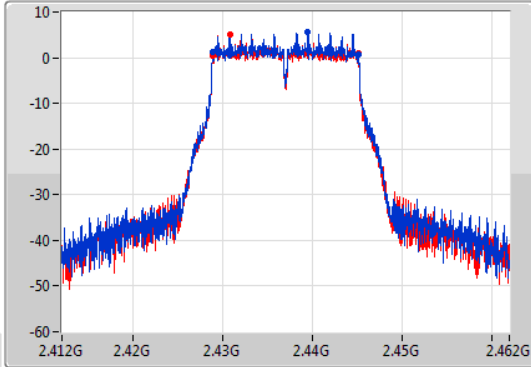

CF
2.437GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

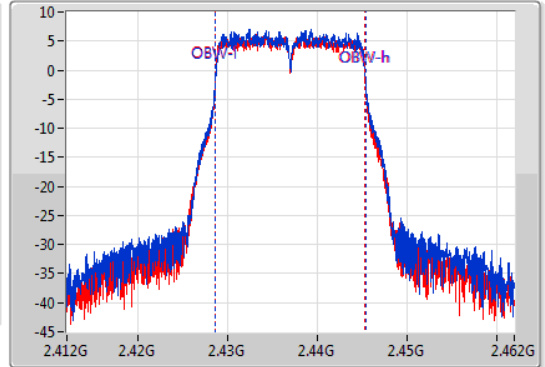

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.325M	2.428825G	2.44515G	16.792M	2.428604G	2.445396G	500k	1
16.325M	2.428825G	2.44515G	16.717M	2.428629G	2.445346G	500k	2


802.11g_Nss1,(6Mbps)_2TX

EBW


2462MHz

05/03/2020

CF
2.462GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

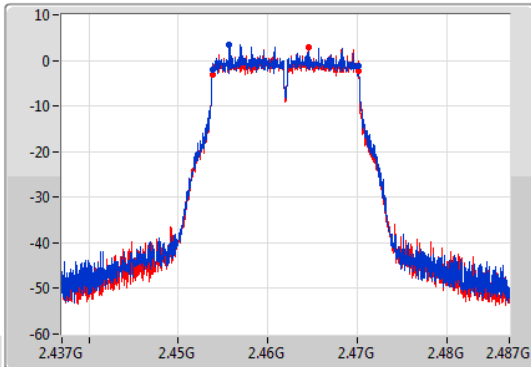

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

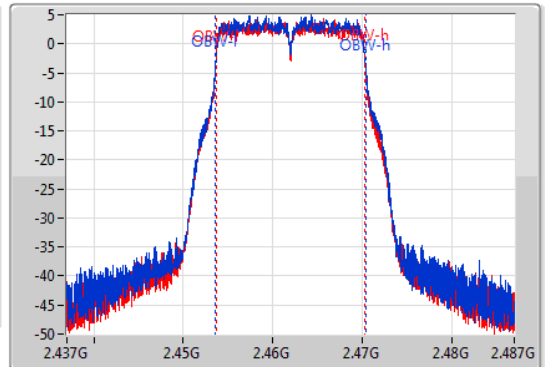

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.325M	2.453825G	2.47015G	16.792M	2.453629G	2.470421G	500k	1
16.375M	2.4538G	2.470175G	16.692M	2.453654G	2.470346G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

2412MHz

05/03/2020

CF
2.412GHz


Span
50MHz


RBW
100kHz


VBW
300kHz

Sweep Time
100ms

Detector Type
Peak

Port 1 

Port 2 

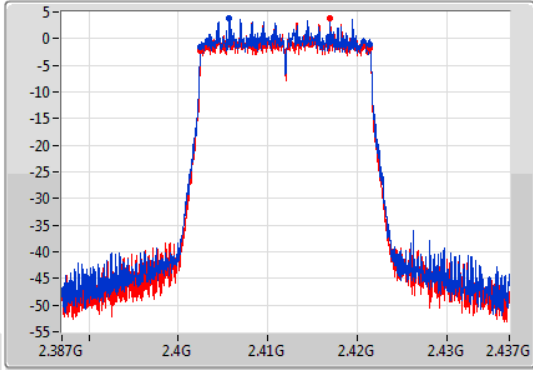

CF
2.412GHz


Span
50MHz

RBW
200kHz

VBW
1MHz

Sweep Time
100ms

Detector Type
Peak

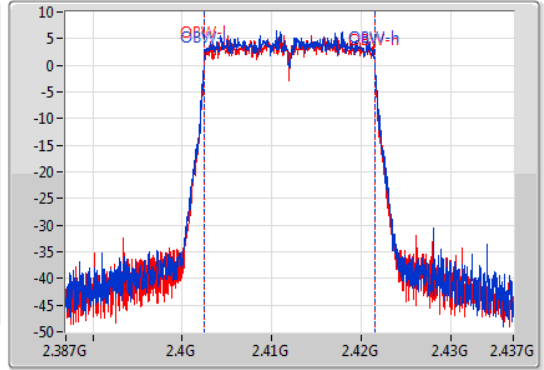

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.95M	2.4025G	2.42145G	19.04M	2.402455G	2.421495G	500k	1
18.95M	2.4025G	2.42145G	19.015M	2.40248G	2.421495G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

2437MHz

05/03/2020

CF
2.437GHz


Span
50MHz


RBW
100kHz


VBW
300kHz

Sweep Time
100ms

Detector Type
Peak

Port 1 

Port 2 

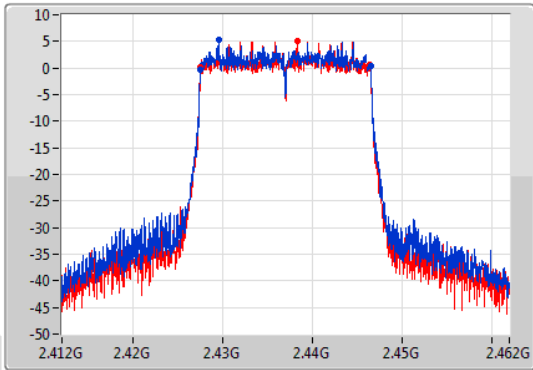

CF
2.437GHz


Span
50MHz

RBW
200kHz

VBW
1MHz

Sweep Time
100ms

Detector Type
Peak

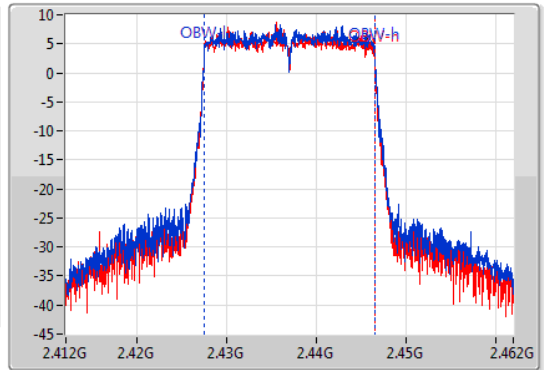



6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.025M	2.427475G	2.4465G	19.04M	2.42748G	2.44652G	500k	1
18.95M	2.4275G	2.44645G	19.04M	2.427455G	2.446495G	500k	2


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


2462MHz

05/03/2020

CF
2.462GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak
Port 1 
Port 2 

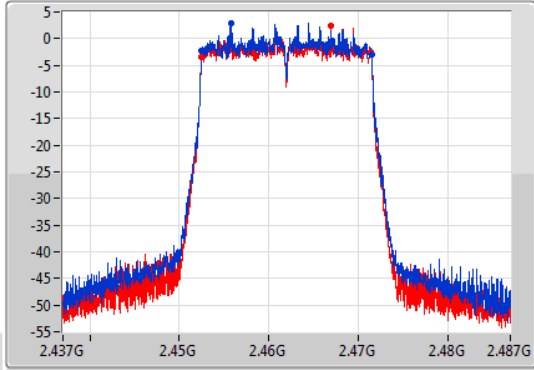

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

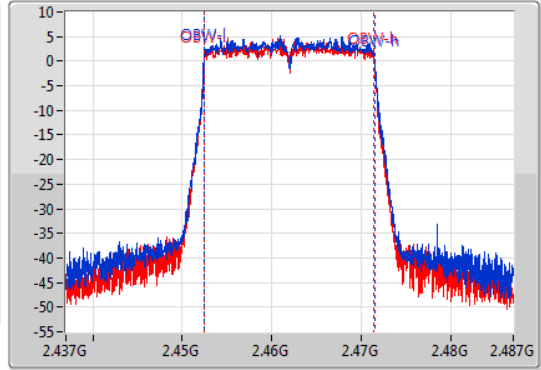

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19M	2.4525G	2.4715G	19.04M	2.45248G	2.47152G	500k	1
18.95M	2.4525G	2.47145G	18.991M	2.45248G	2.47147G	500k	2

<2T2S>

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	19.05M	19.115M	19M1D1D	18.8M	19.04M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	19M	19.115M	18.925M	19.04M
2462MHz	Pass	500k	19.05M	19.115M	18.8M	19.04M

Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;


802.11ax HEW20_Nss2,(MCS0)_2TX

EBW


2412MHz

27/03/2020

CF
2.412GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

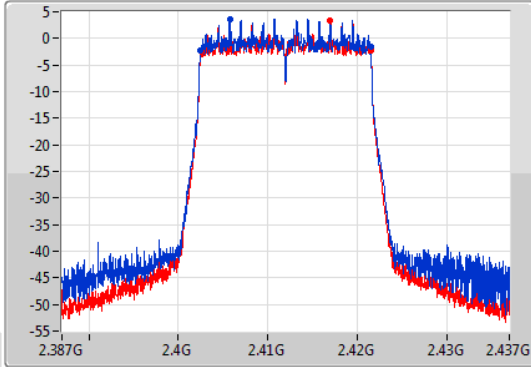

CF
2.412GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

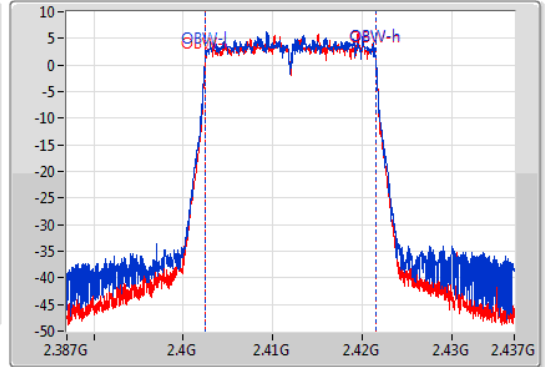

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19M	2.402525G	2.421525G	19.115M	2.40243G	2.421545G	500k	1
18.925M	2.402575G	2.4215G	19.04M	2.40248G	2.42152G	500k	2


802.11ax HEW20_Nss2,(MCS0)_2TX

EBW


2462MHz

27/03/2020

CF
2.462GHz
Span
50MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

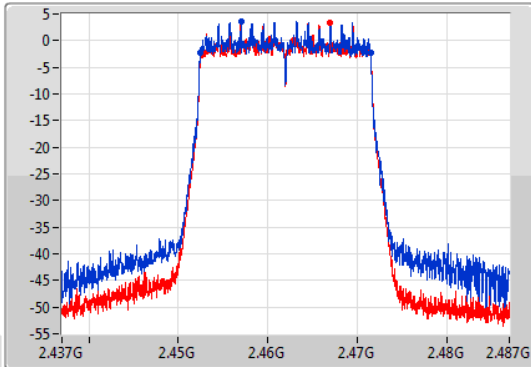

CF
2.462GHz
Span
50MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

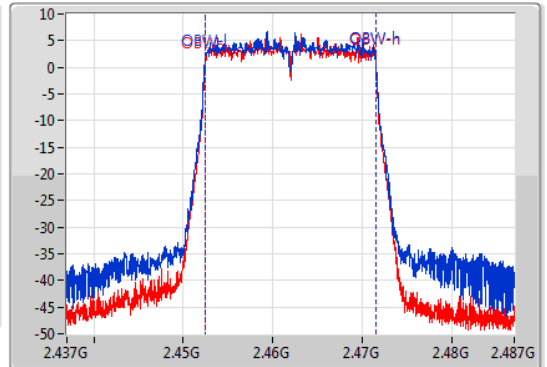

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	2.4525G	2.47155G	19.115M	2.45243G	2.471545G	500k	1
18.8M	2.4527G	2.4715G	19.04M	2.45248G	2.47152G	500k	2



<2T1S>

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
2.4-2.4835GHz	-	-		
802.11b_Nss1,(1Mbps)_2TX	20.48	0.11169	22.73	0.18749
802.11g_Nss1,(6Mbps)_2TX	20.34	0.10814	22.59	0.18155
802.11ax HEW20_Nss1,(MCS0)_2TX	20.48	0.11169	22.73	0.18749
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	20.48	0.11169	25.67	0.36898



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP Power (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	1.81	17.44	17.46	20.46	30.00	22.27
2437MHz	Pass	2.25	17.48	17.45	20.48	30.00	22.73
2462MHz	Pass	2.48	17.41	17.51	20.47	30.00	22.95
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	1.81	15.60	15.28	18.45	30.00	20.26
2437MHz	Pass	2.25	17.50	17.15	20.34	30.00	22.59
2462MHz	Pass	2.48	15.38	15.09	18.25	30.00	20.73
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	1.81	15.80	15.53	18.68	30.00	20.49
2437MHz	Pass	2.25	17.49	17.44	20.48	30.00	22.73
2462MHz	Pass	2.48	14.81	14.63	17.73	30.00	20.21
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	4.73	15.80	15.53	18.68	30.00	23.41
2437MHz	Pass	5.19	17.49	17.44	20.48	30.00	25.67
2462MHz	Pass	5.29	14.81	14.63	17.73	30.00	23.02

DG = Directional Gain; **Port X** = Port X output power



<2T2S>

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
2.4-2.4835GHz	-	-		
802.11ax HEW20_Nss2,(MCS0)_2TX	18.52	0.07112	20.80	0.17301



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP Power (dBm)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	1.72	15.51	15.46	18.50	30.00	20.22
2462MHz	Pass	2.28	15.76	15.24	18.52	30.00	20.80

DG = Directional Gain; **Port X** = Port X output power

<2T1S>

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-2.54
802.11g_Nss1,(6Mbps)_2TX	-6.21
802.11ax HEW20_Nss1,(MCS0)_2TX	-7.45
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-7.45




RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.73	-4.90	-5.28	-3.43	8.00
2437MHz	Pass	5.19	-5.43	-3.38	-2.54	8.00
2462MHz	Pass	5.29	-6.11	-5.45	-3.69	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.73	-10.53	-11.10	-8.35	8.00
2437MHz	Pass	5.19	-8.47	-8.50	-6.21	8.00
2462MHz	Pass	5.29	-10.81	-11.35	-8.20	8.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.73	-10.76	-11.43	-8.24	8.00
2437MHz	Pass	5.19	-9.61	-8.95	-7.45	8.00
2462MHz	Pass	5.29	-11.53	-12.12	-9.15	8.00
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.73	-10.76	-11.43	-8.60	8.00
2437MHz	Pass	5.19	-9.61	-8.95	-7.45	8.00
2462MHz	Pass	5.29	-11.53	-11.43	-9.15	8.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

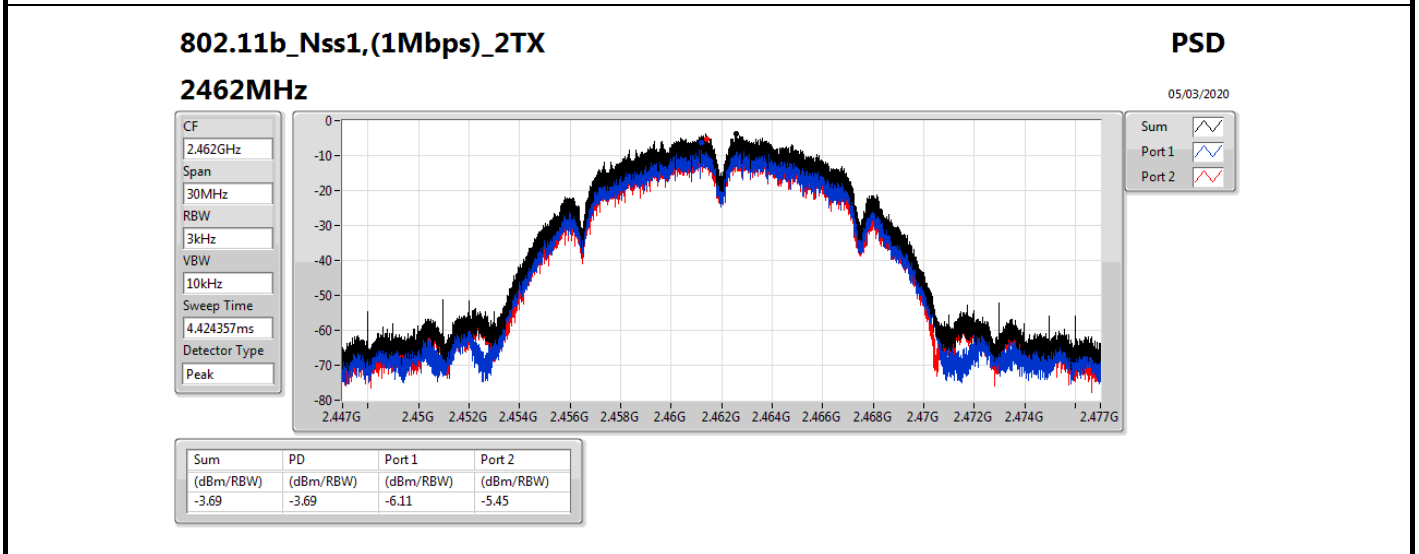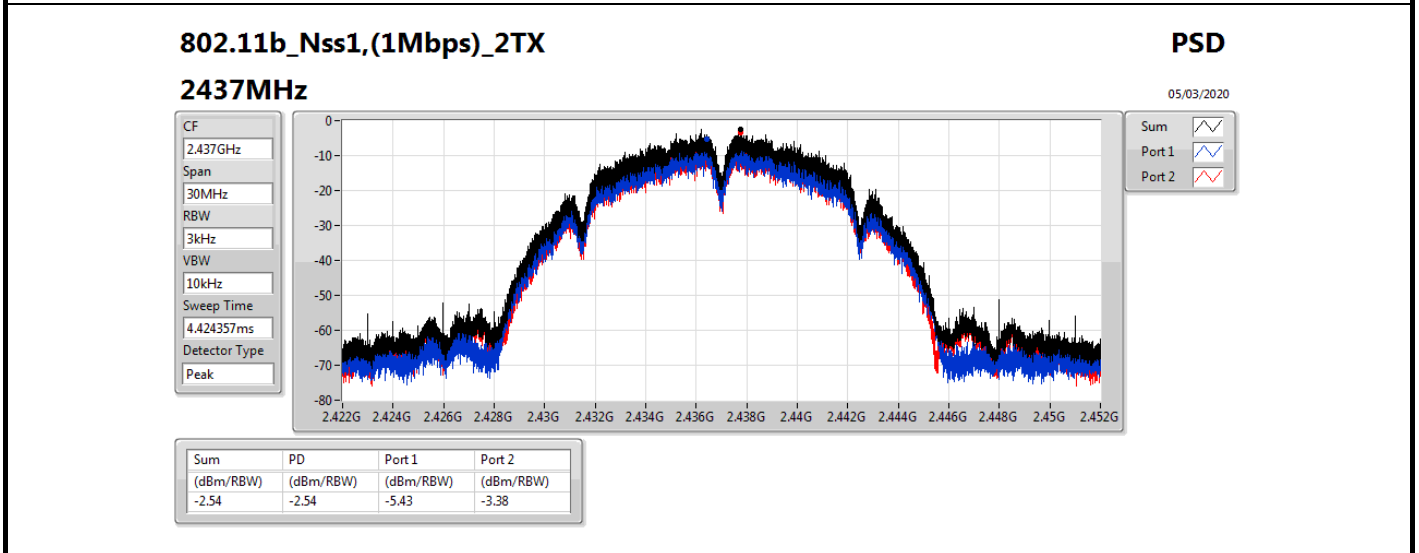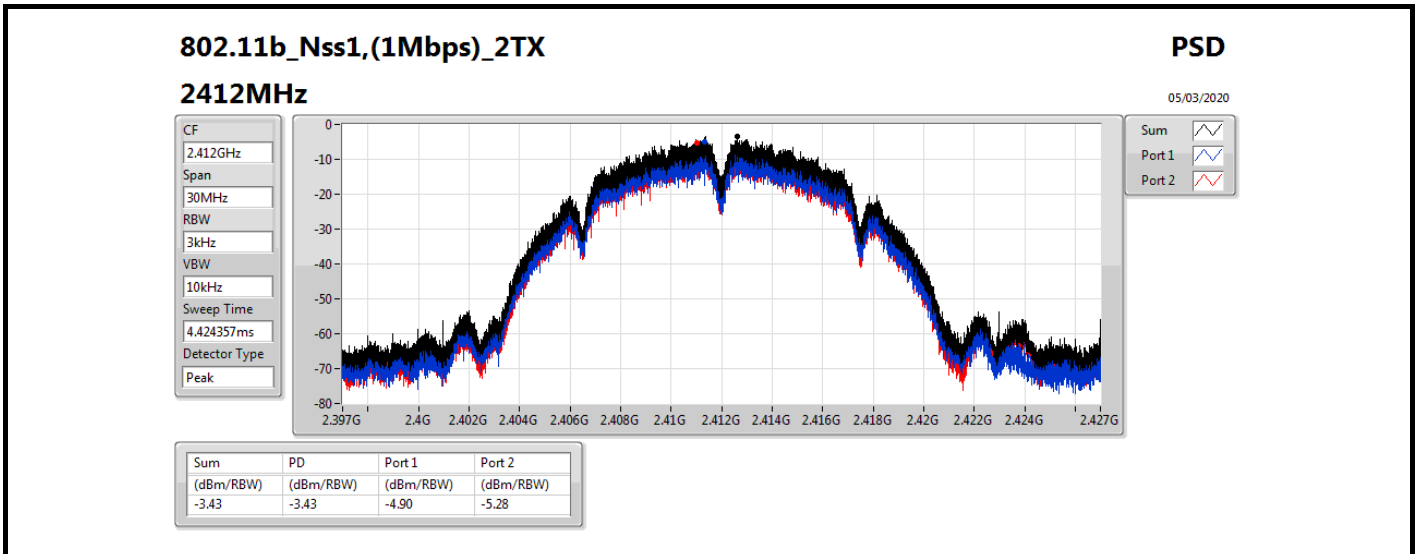

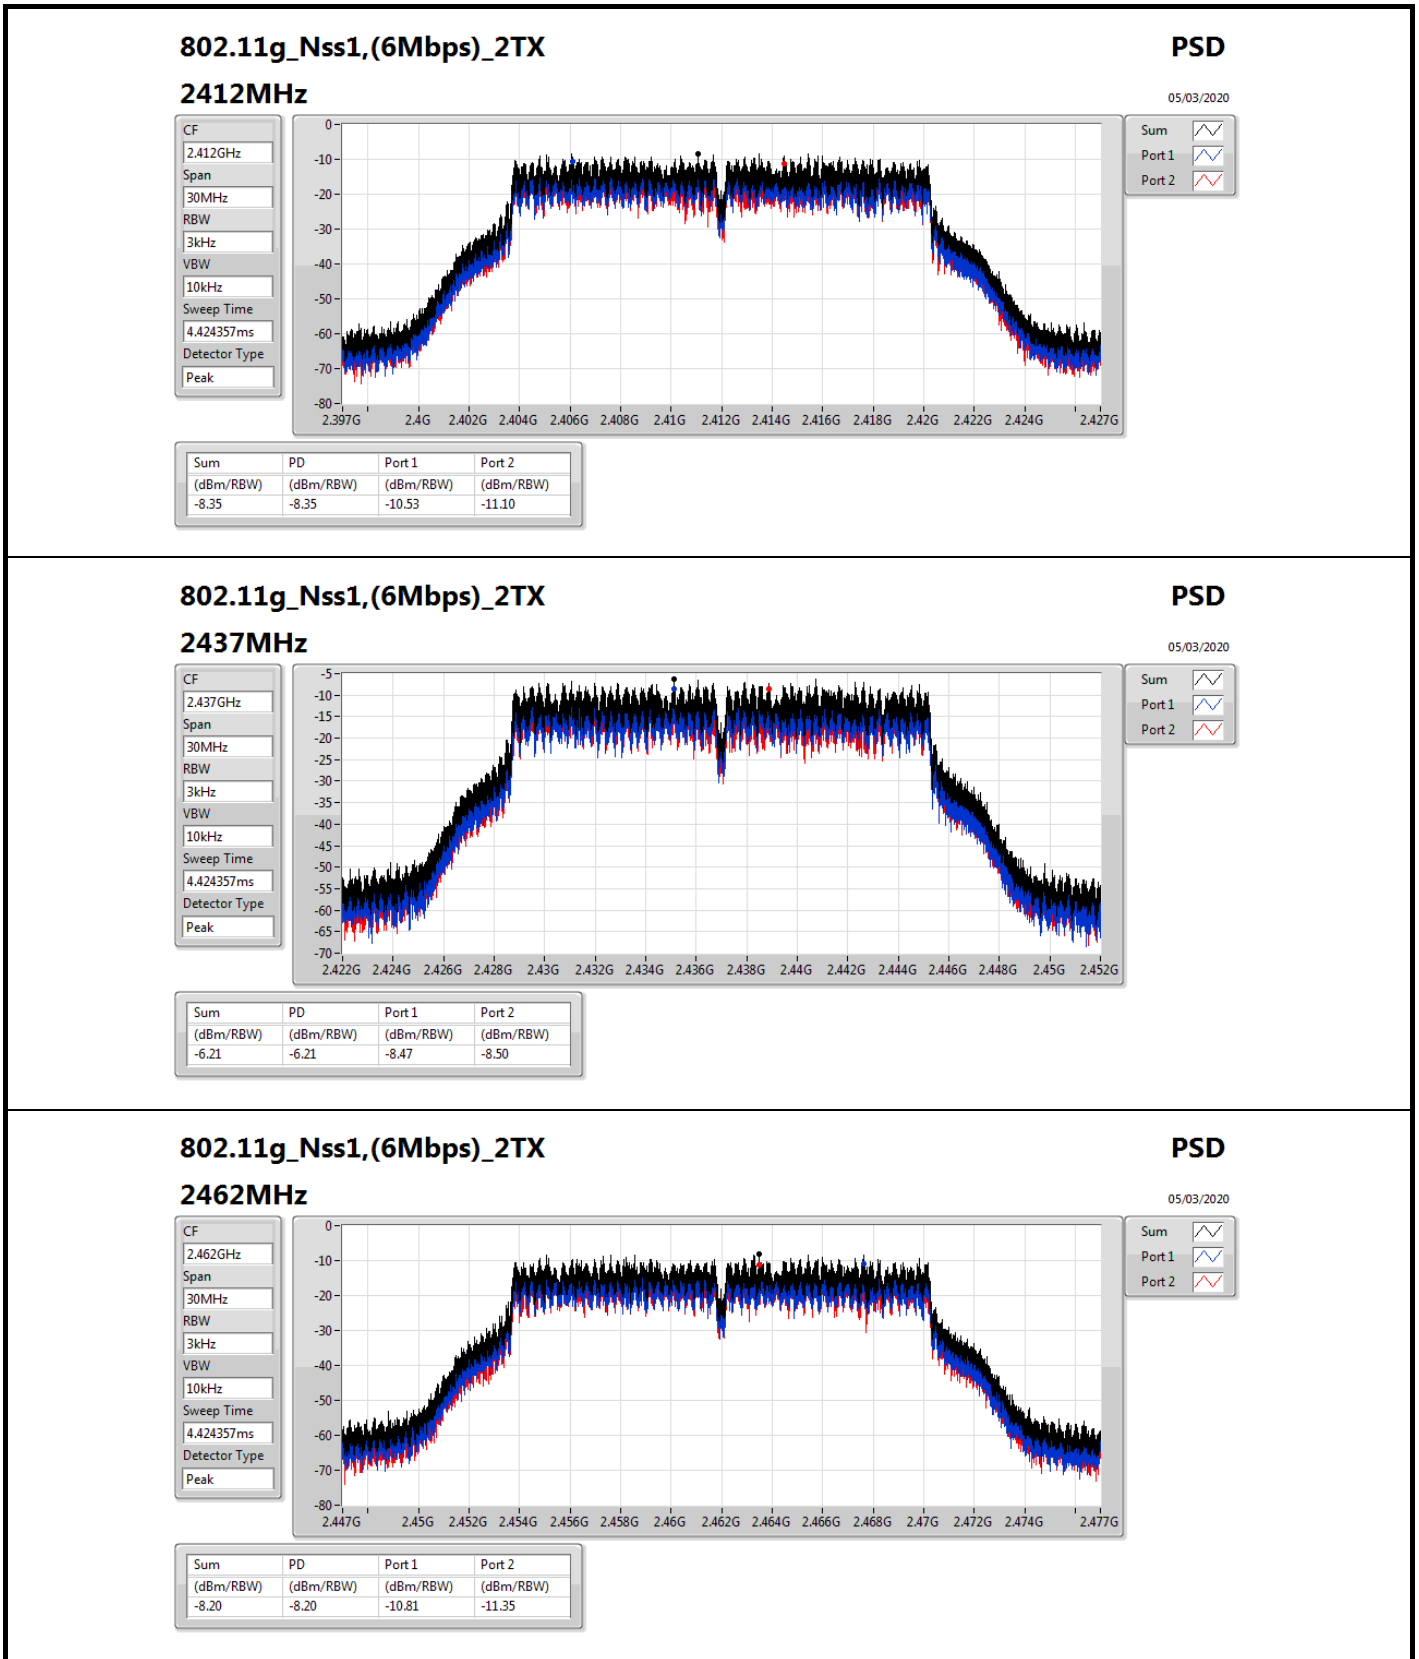

802.11g_Nss1,(6Mbps)_2TX

2462MHz

PSD

05/03/2020

CF
2.462GHz

Span
30MHz

RBW
3kHz

VBW
10kHz

Sweep Time
4.424357ms




Detector Type
Peak






Sum 

Port 1 

Port 2 

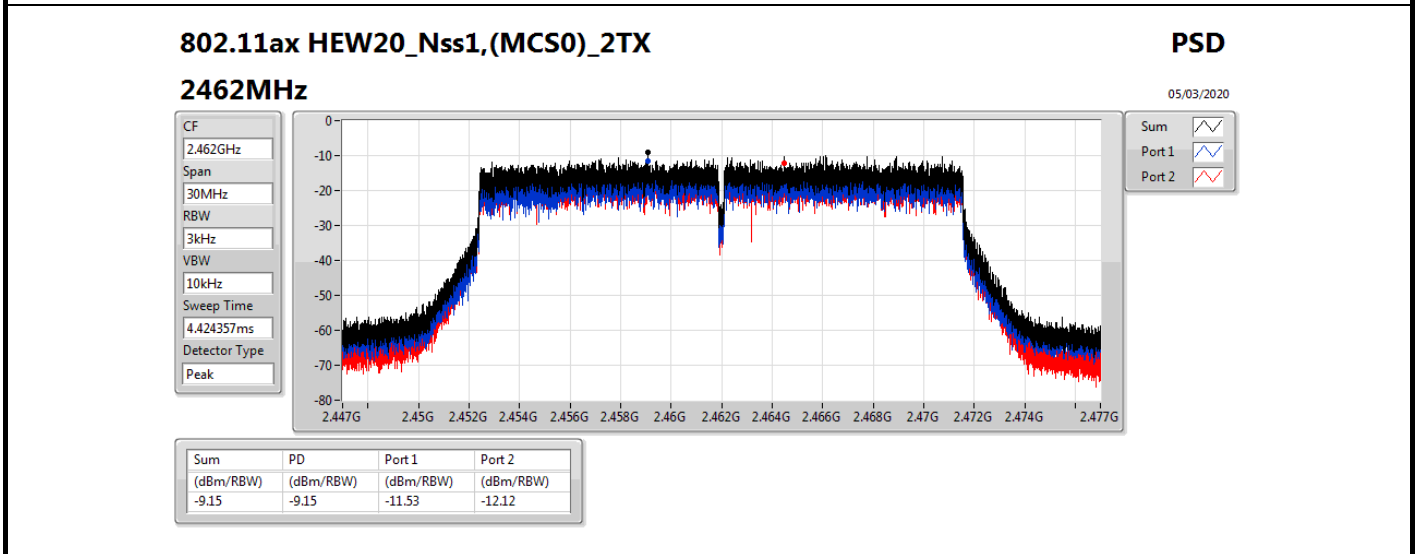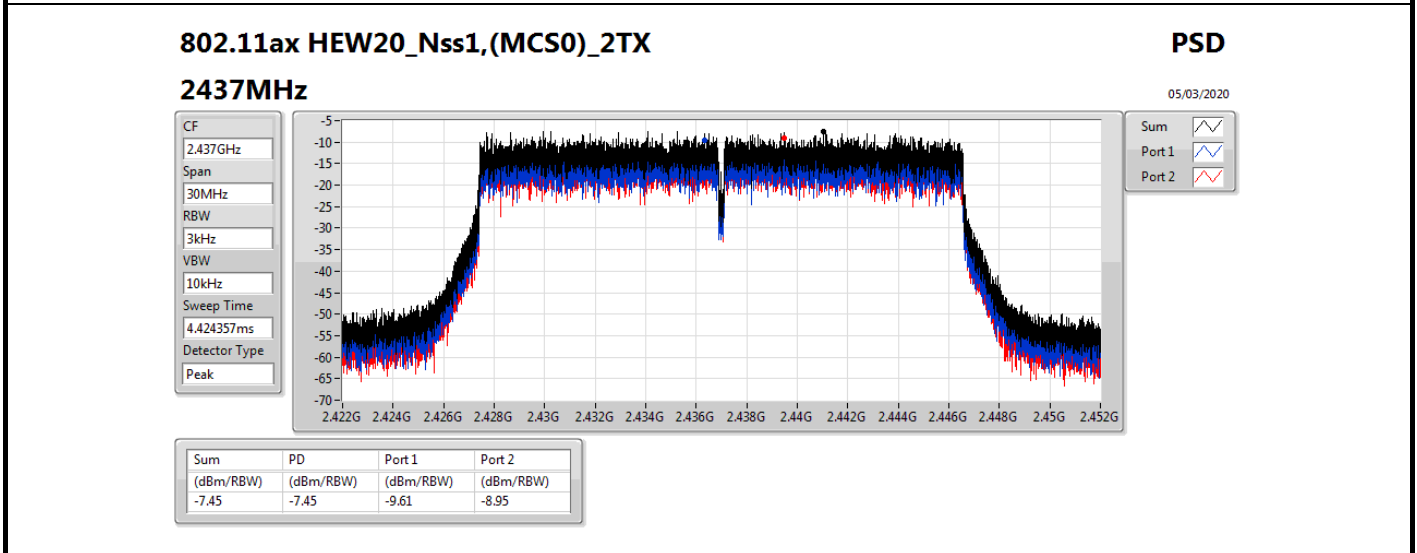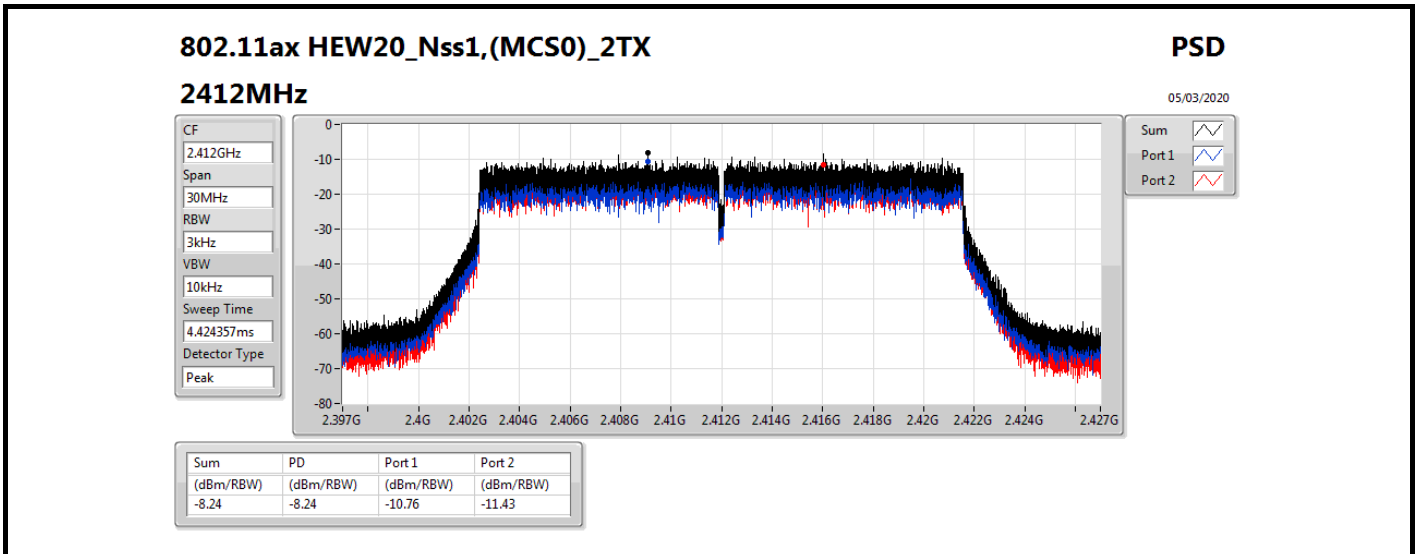

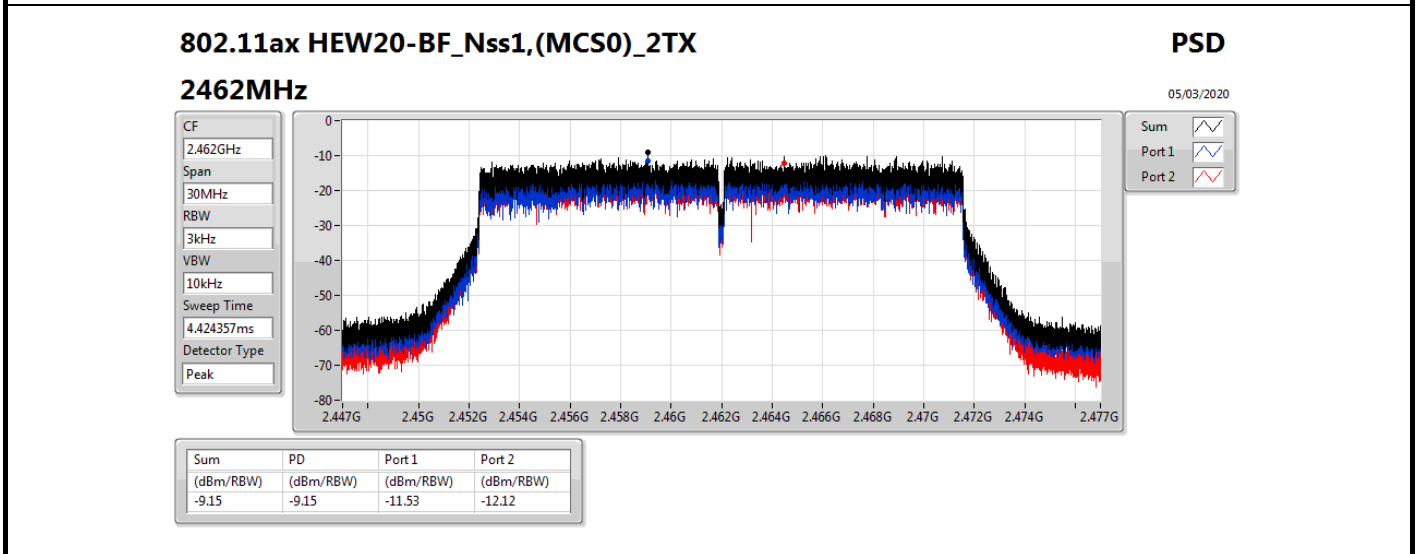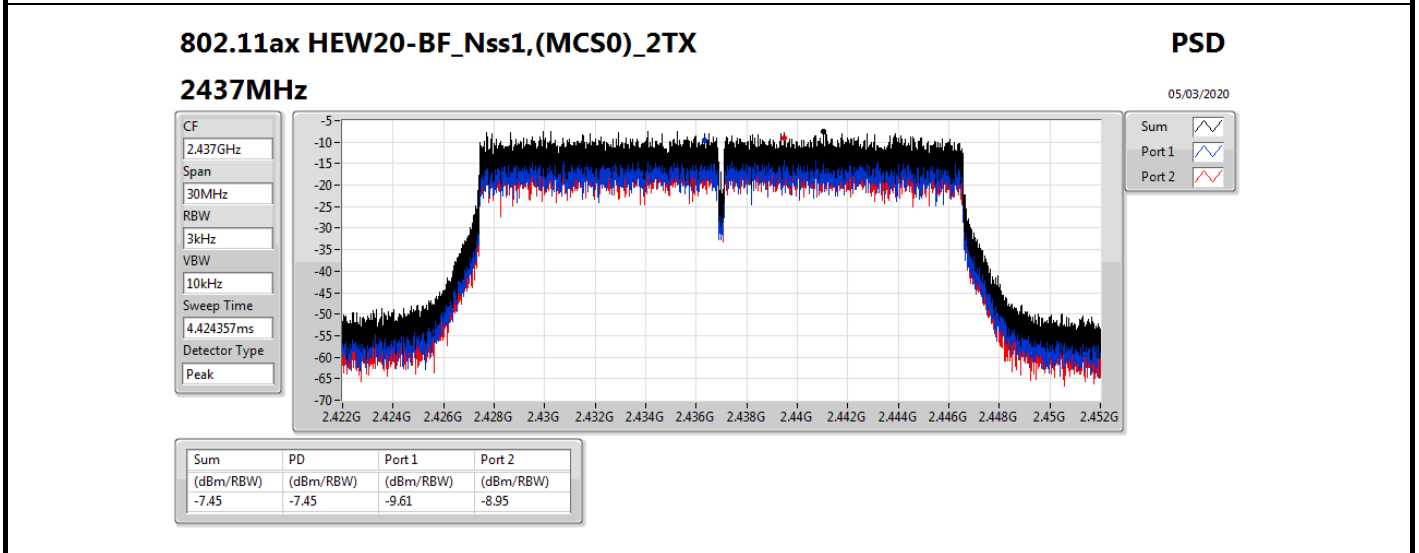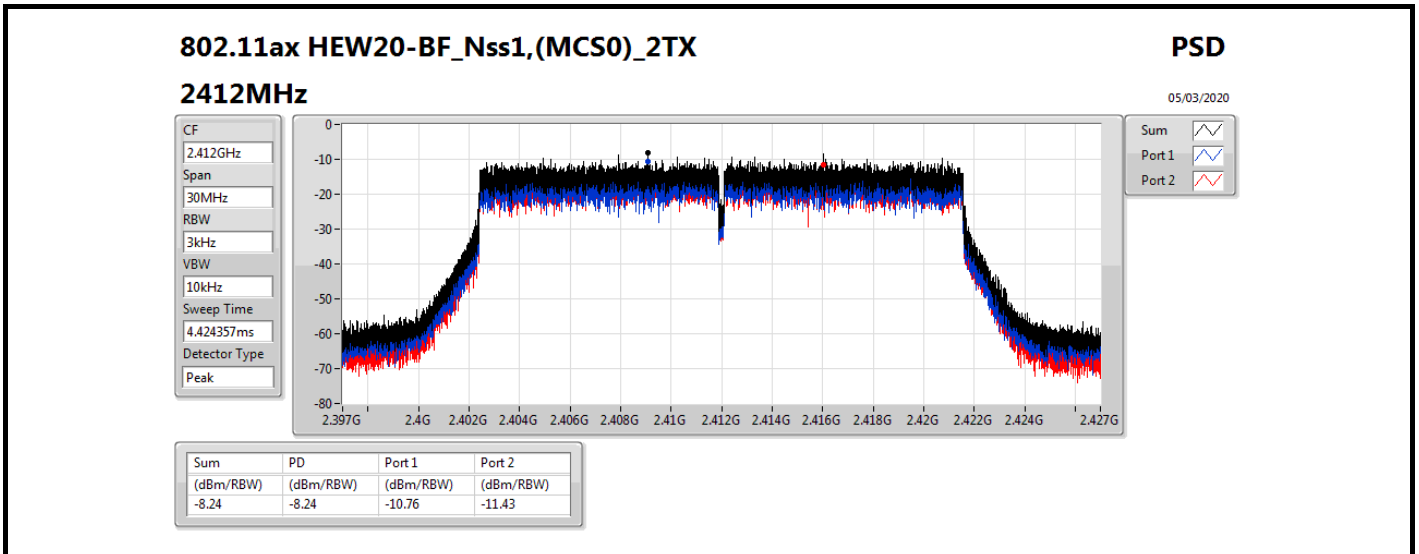



<2T2S>

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	-9.50



RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	1.72	-10.89	-11.68	-9.57	8.00
2462MHz	Pass	2.28	-11.46	-11.93	-9.50	8.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

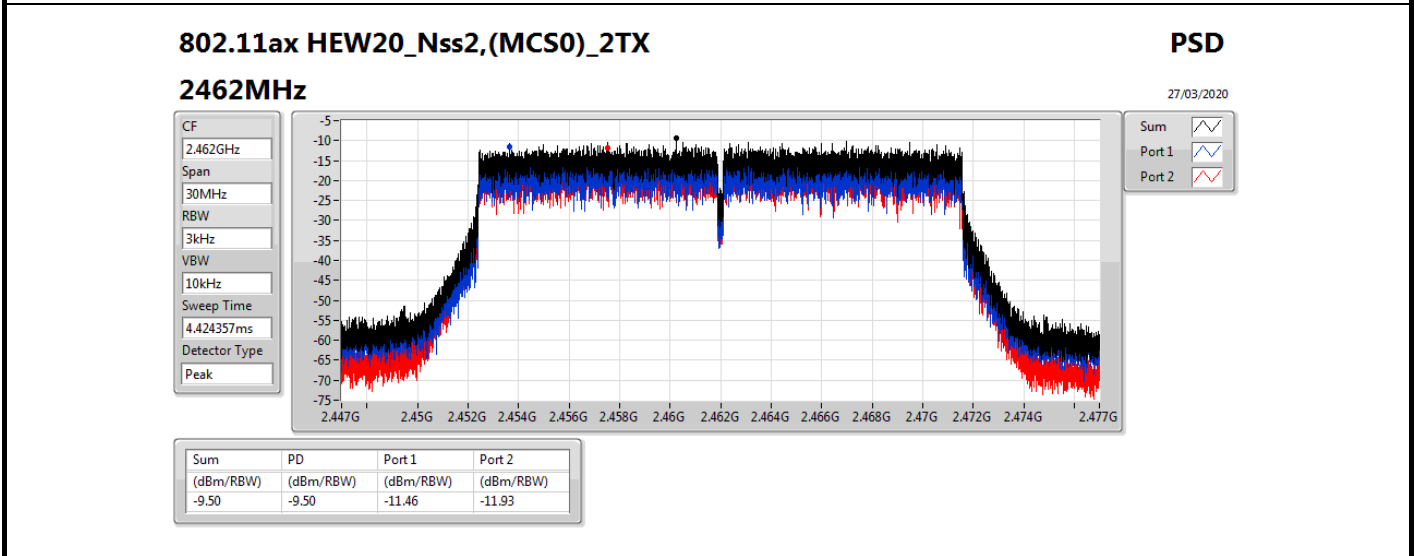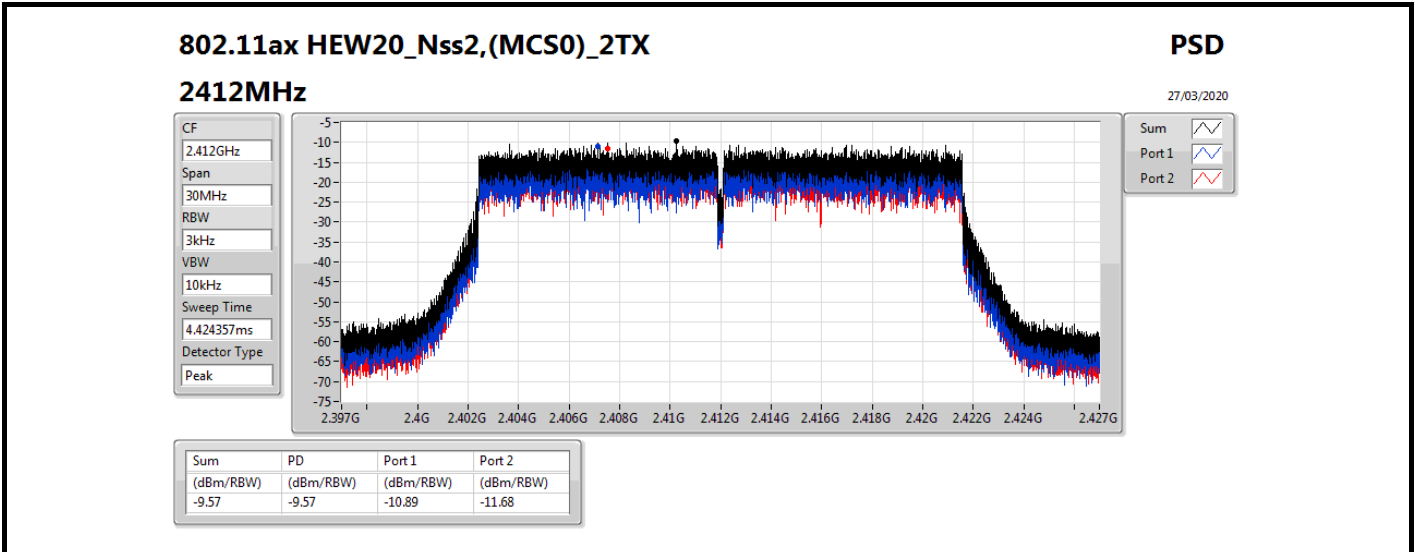





<2T1S>



Summary



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43649G	9.78	-20.22	1.97992G	-52.08	2.39998G	-41.76	2.4G	-42.66	2.4885G	-51.53	16.73989G	-47.05	2
802.11g_Nss1,(6Mbps)_2TX	Pass	2.43073G	5.82	-24.18	846.37M	-53.07	2.39996G	-39.98	2.4G	-41.36	2.50984G	-50.87	6.96542G	-46.06	1
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	2.44196G	6.08	-23.92	345.13M	-52.58	2.39734G	-36.86	2.4G	-39.45	2.4845G	-50.8	15.22272G	-46.57	2



Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43649G	9.78	-20.22	804.73M	-53.05	2.39902G	-47.37	2.4G	-48.19	2.51116G	-51.01	16.73708G	-46.52	1
2412MHz	Pass	2.43649G	9.78	-20.22	1.97992G	-52.08	2.39998G	-41.76	2.4G	-42.66	2.4885G	-51.53	16.73989G	-47.05	2
2437MHz	Pass	2.43649G	9.78	-20.22	570.27M	-53.02	2.3987G	-49.86	2.4G	-52.49	2.48486G	-50.08	16.91689G	-47.18	1
2437MHz	Pass	2.43649G	9.78	-20.22	2.30932G	-52.75	2.39852G	-49.26	2.4835G	-50.87	2.50028G	-50.01	16.52636G	-46.17	2
2462MHz	Pass	2.43649G	9.78	-20.22	2.00555G	-53.23	2.39364G	-50.85	2.4835G	-51.46	2.4853G	-49.21	15.2761G	-46.61	1
2462MHz	Pass	2.43649G	9.78	-20.22	560.37M	-53.62	2.39304G	-50.3	2.4G	-52.01	2.48562G	-48.25	24.49428G	-46.86	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	5.82	-24.18	846.37M	-53.07	2.39996G	-39.98	2.4G	-41.36	2.50984G	-50.87	6.96542G	-46.06	1
2412MHz	Pass	2.43073G	5.82	-24.18	765.41M	-53.11	2.39954G	-40.47	2.4G	-41.43	2.48354G	-51.63	16.75674G	-46.76	2
2437MHz	Pass	2.43073G	5.82	-24.18	935.5M	-53.15	2.39636G	-46.07	2.4G	-50.09	2.48938G	-48.74	16.20888G	-46.91	1
2437MHz	Pass	2.43073G	5.82	-24.18	878.41M	-53.15	2.39952G	-48.58	2.4G	-51.23	2.50984G	-49.55	17.61085G	-47.04	2
2462MHz	Pass	2.43073G	5.82	-24.18	747.35M	-53.4	2.39014G	-50.88	2.4835G	-46.22	2.48538G	-44.94	16.8326G	-46.14	1
2462MHz	Pass	2.43073G	5.82	-24.18	950.06M	-52.77	2.3976G	-51.2	2.4835G	-49.12	2.48662G	-44.71	16.7736G	-46.82	2
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44196G	6.08	-23.92	950.06M	-52.84	2.39628G	-38.9	2.4G	-41.84	2.4872G	-51.17	16.40555G	-45.94	1
2412MHz	Pass	2.44196G	6.08	-23.92	345.13M	-52.58	2.39734G	-36.86	2.4G	-39.45	2.4845G	-50.8	15.22272G	-46.57	2
2437MHz	Pass	2.44196G	6.08	-23.92	1.83837G	-53.21	2.39678G	-45.34	2.4G	-47.94	2.4848G	-48.33	16.85508G	-46.46	1
2437MHz	Pass	2.44196G	6.08	-23.92	959.96M	-52.32	2.39394G	-46.79	2.4G	-48.34	2.48474G	-48.41	24.80895G	-47.21	2
2462MHz	Pass	2.44196G	6.08	-23.92	2.07079G	-53.65	2.39744G	-51.22	2.4835G	-48.76	2.48366G	-43.62	16.89722G	-46.37	1
2462MHz	Pass	2.44196G	6.08	-23.92	466.88M	-52.52	2.39578G	-50.27	2.4835G	-51.58	2.48464G	-46.2	16.92532G	-47.07	2

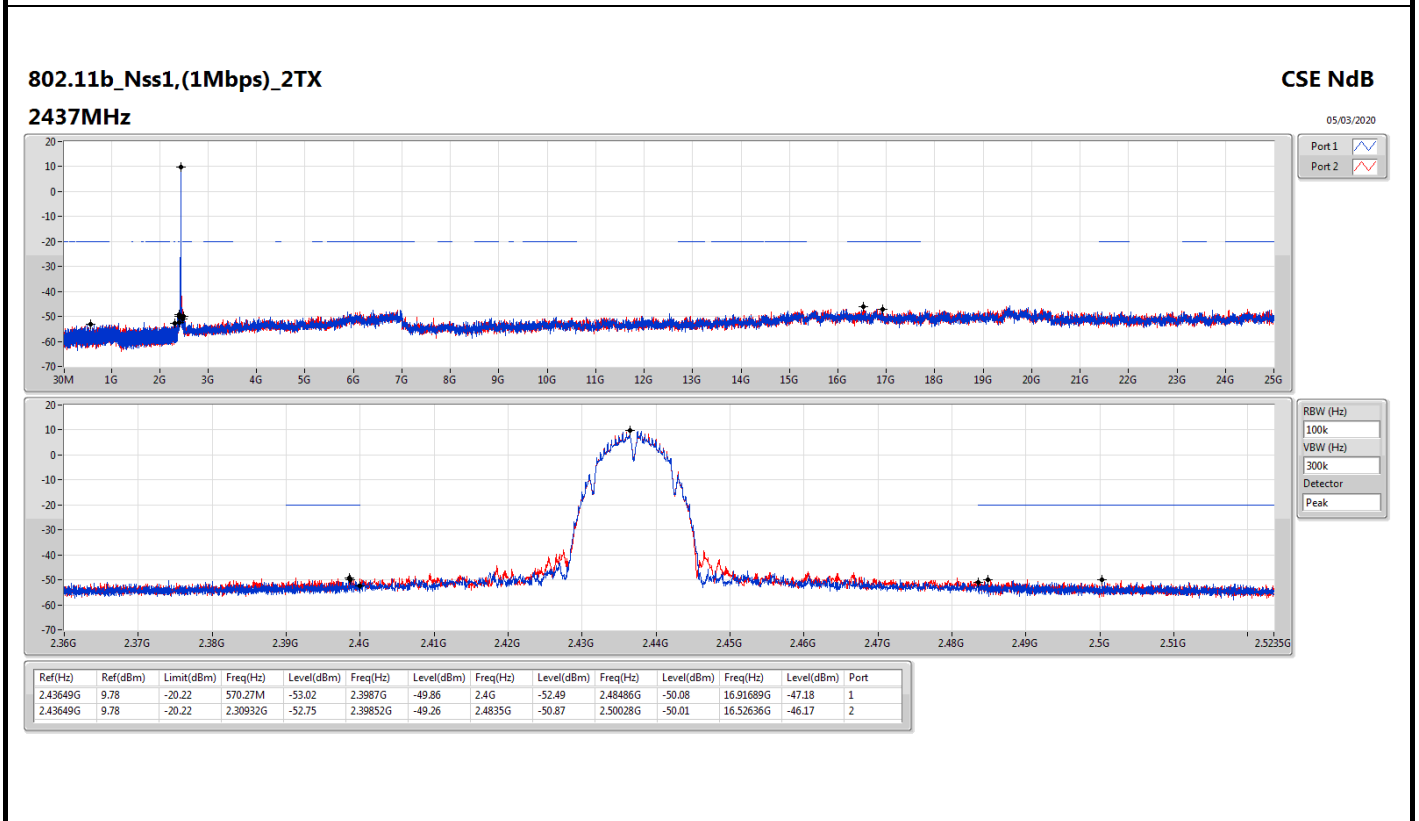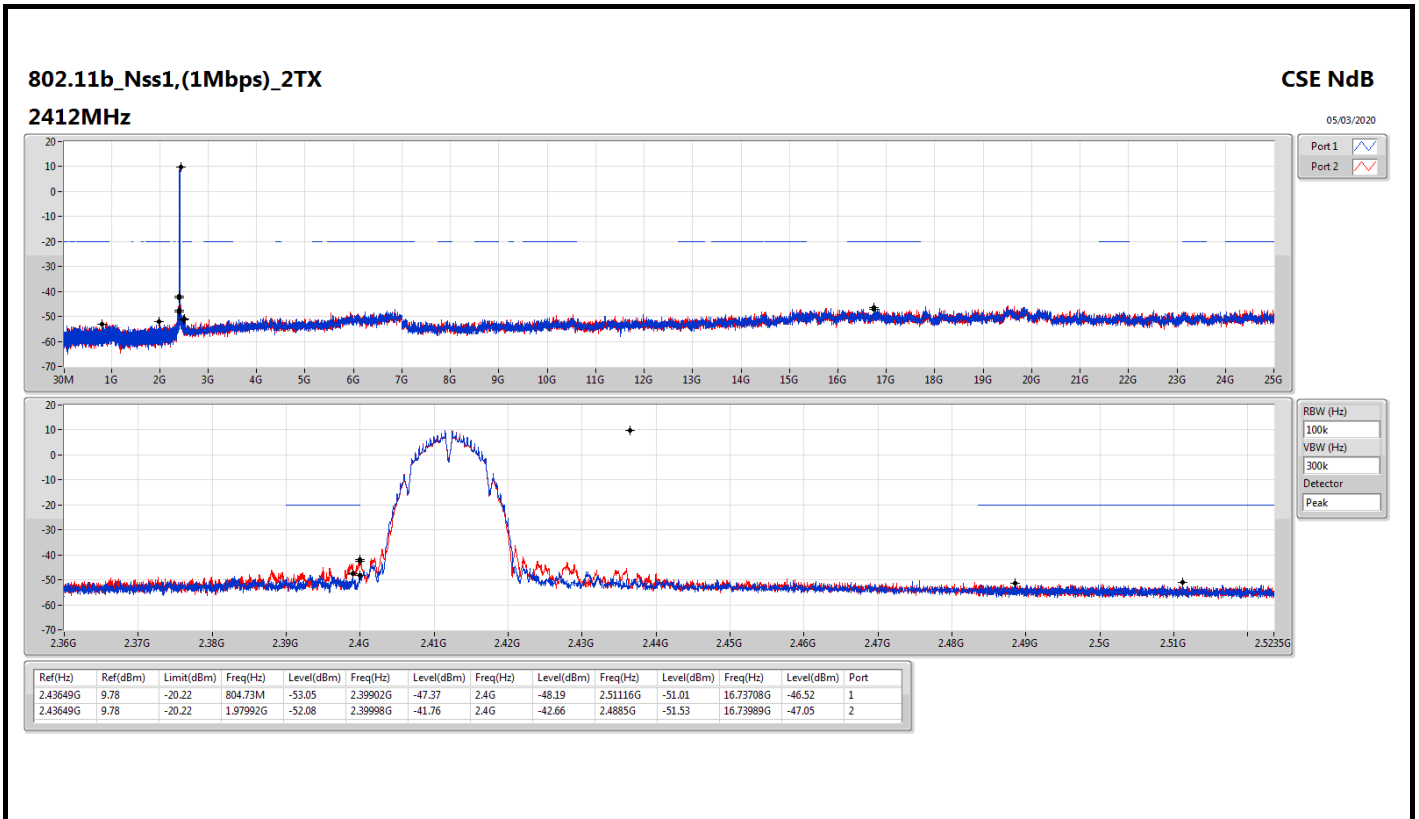

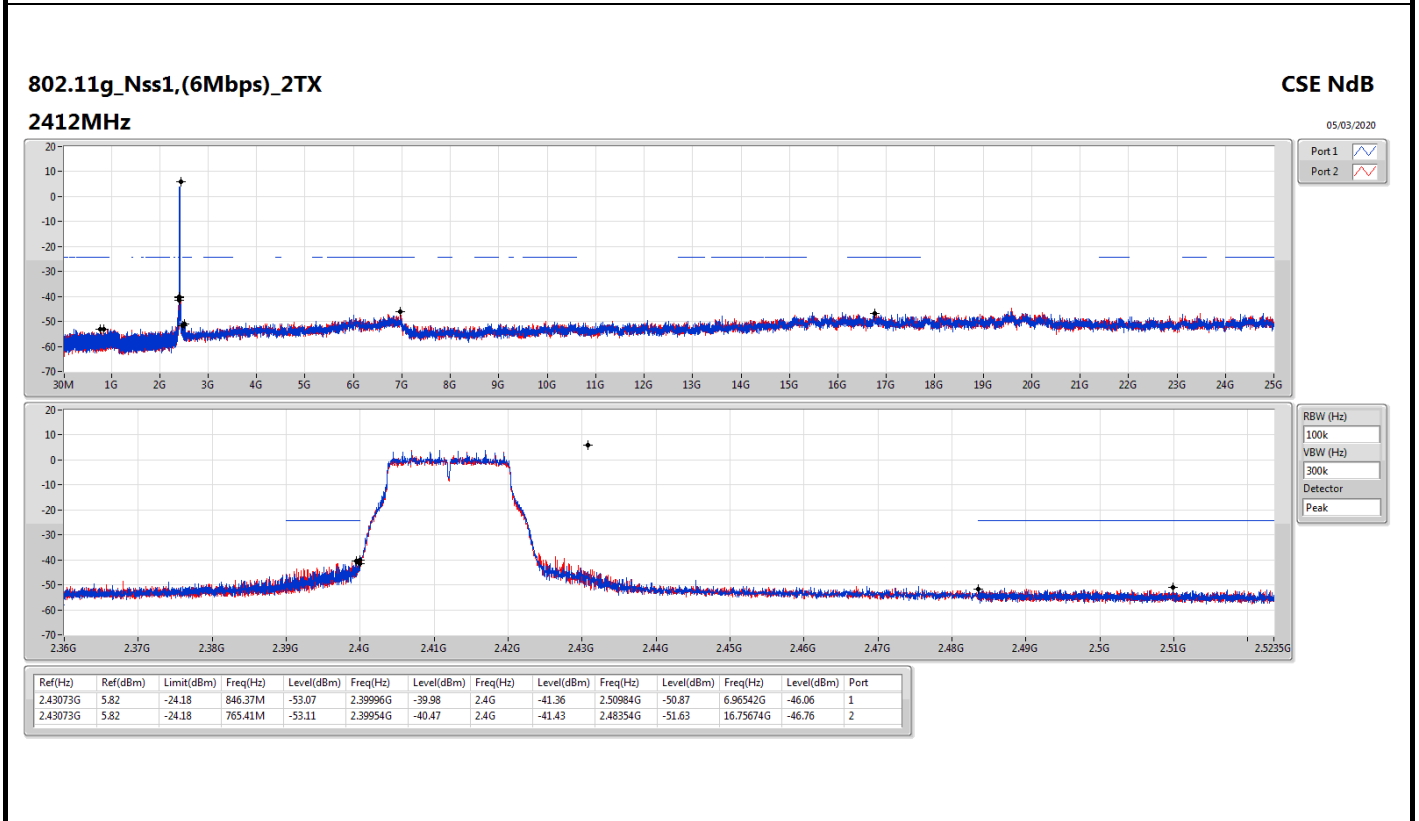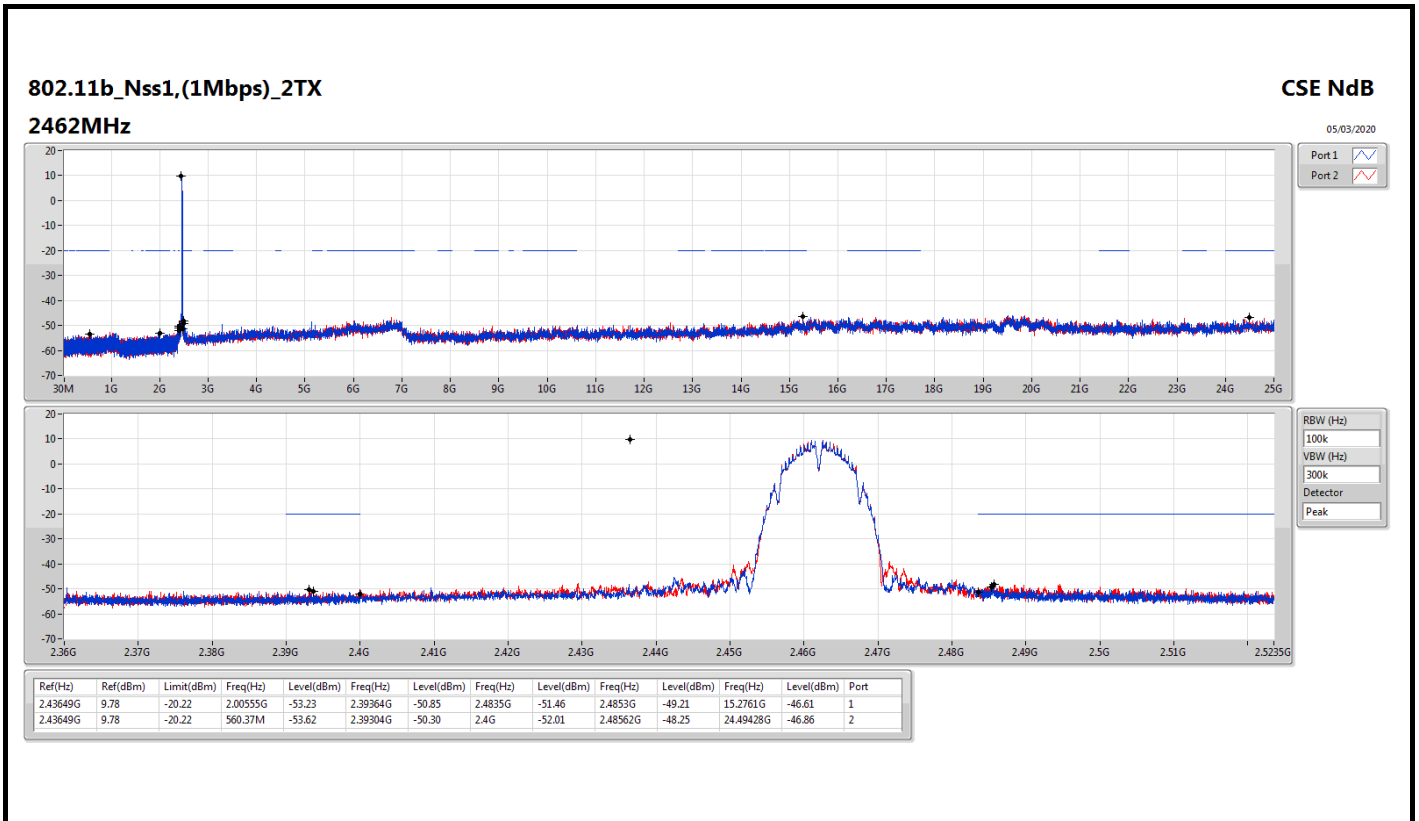

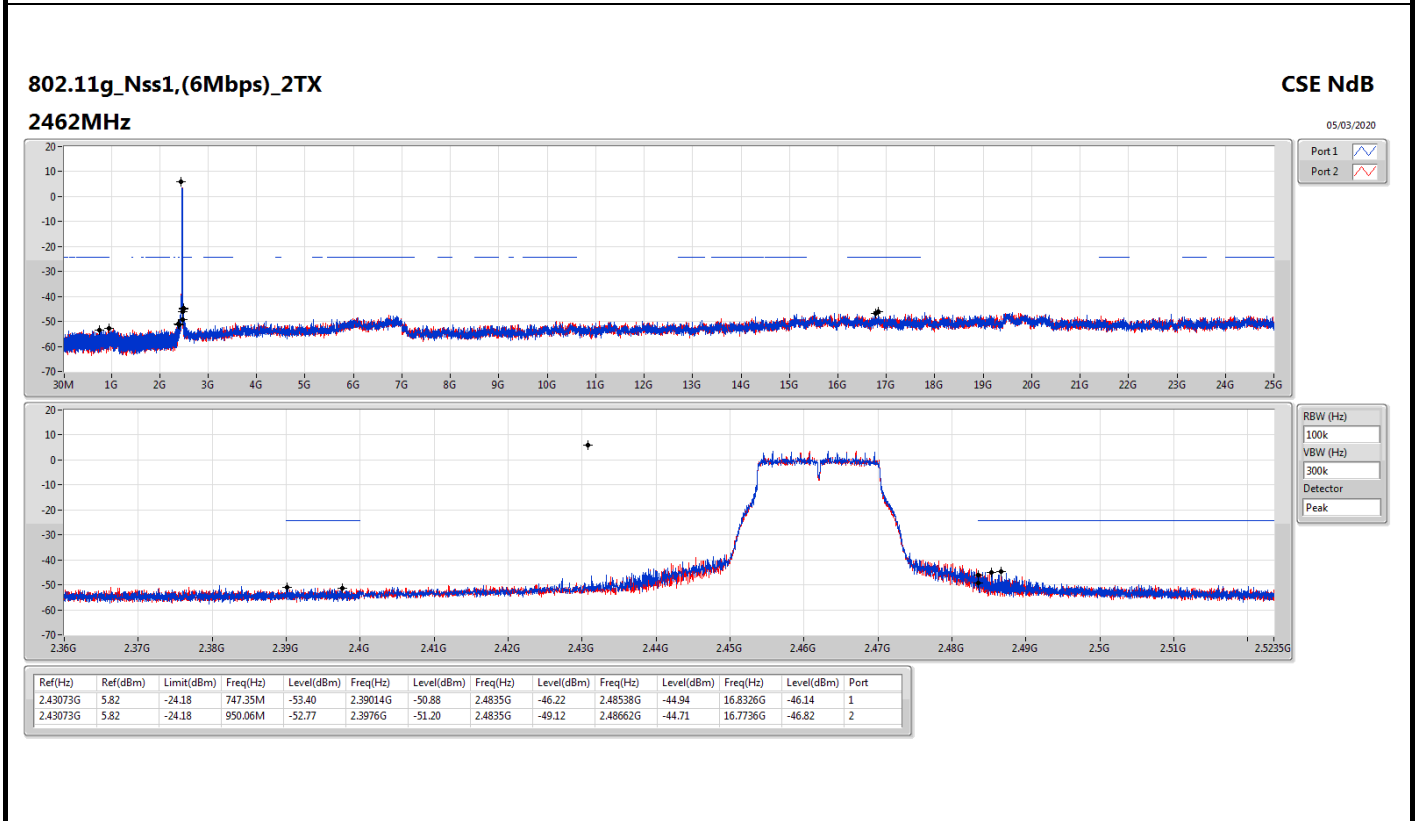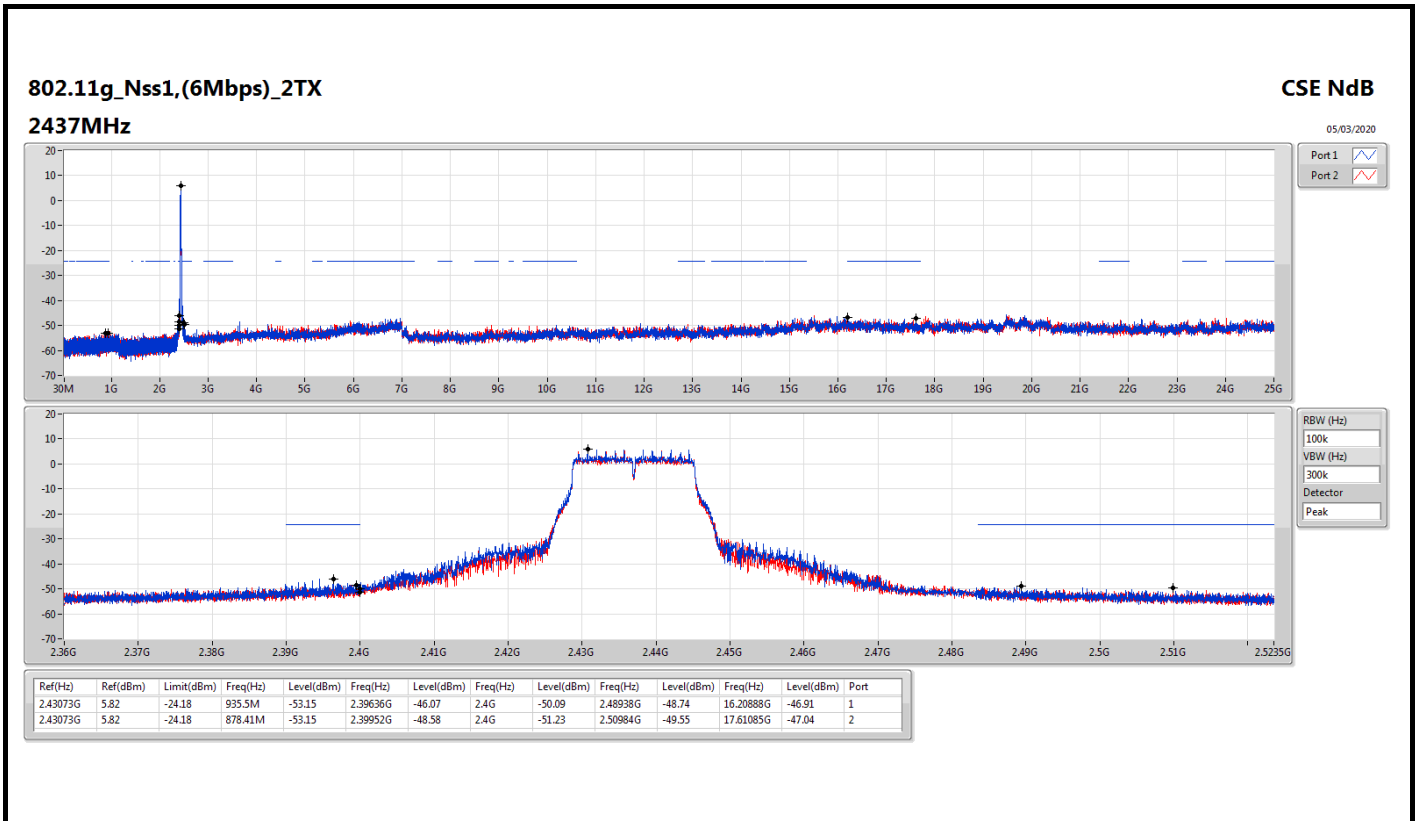

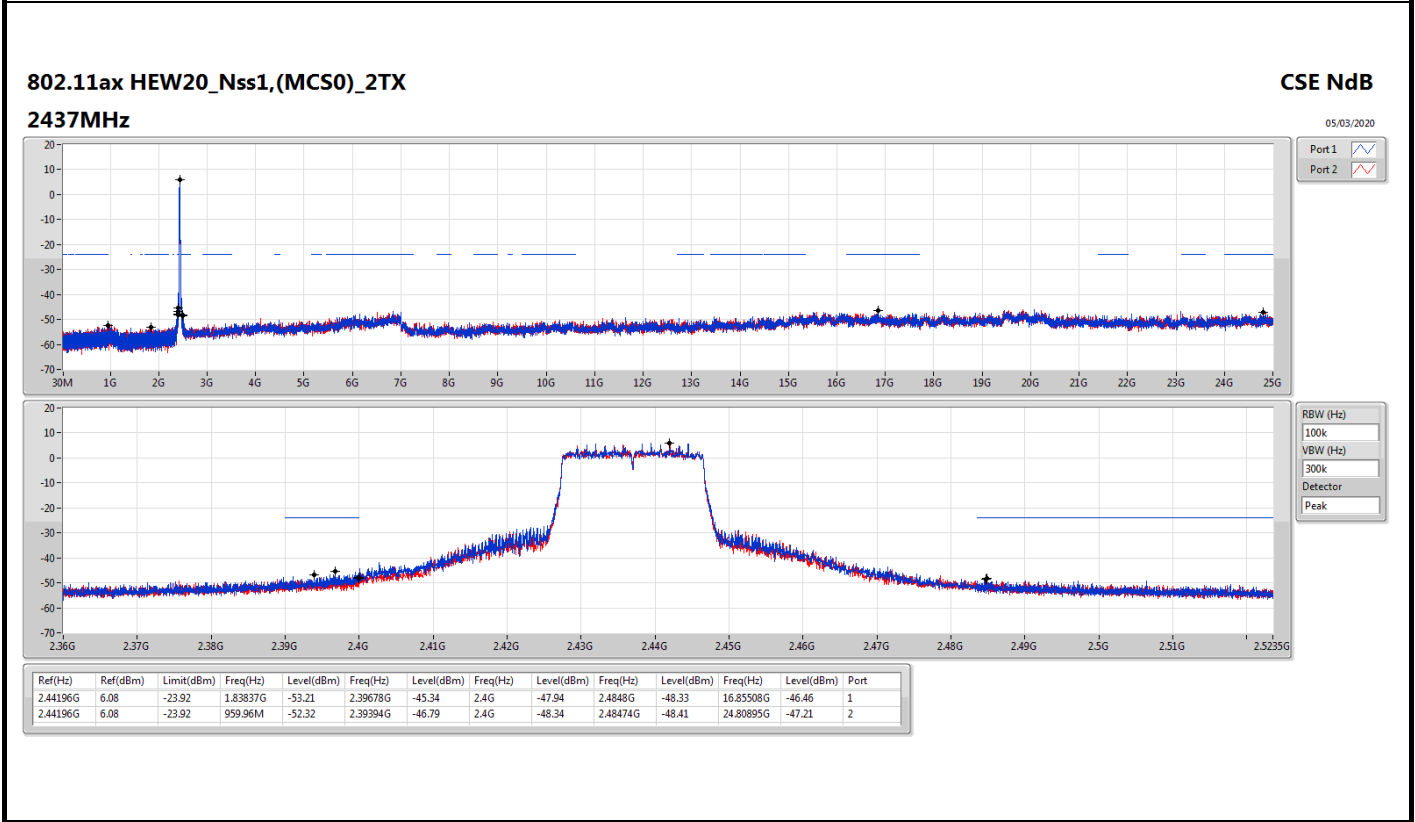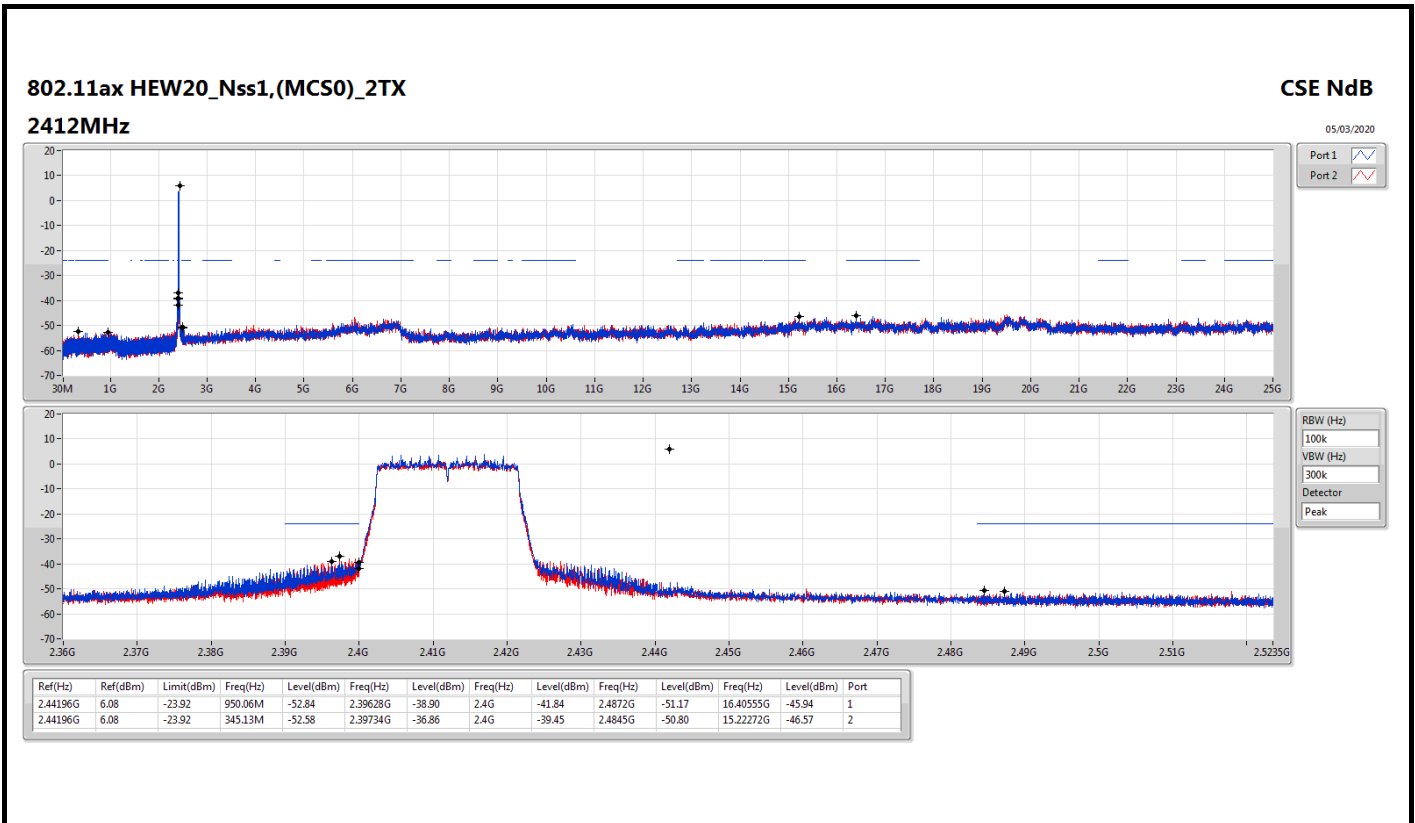

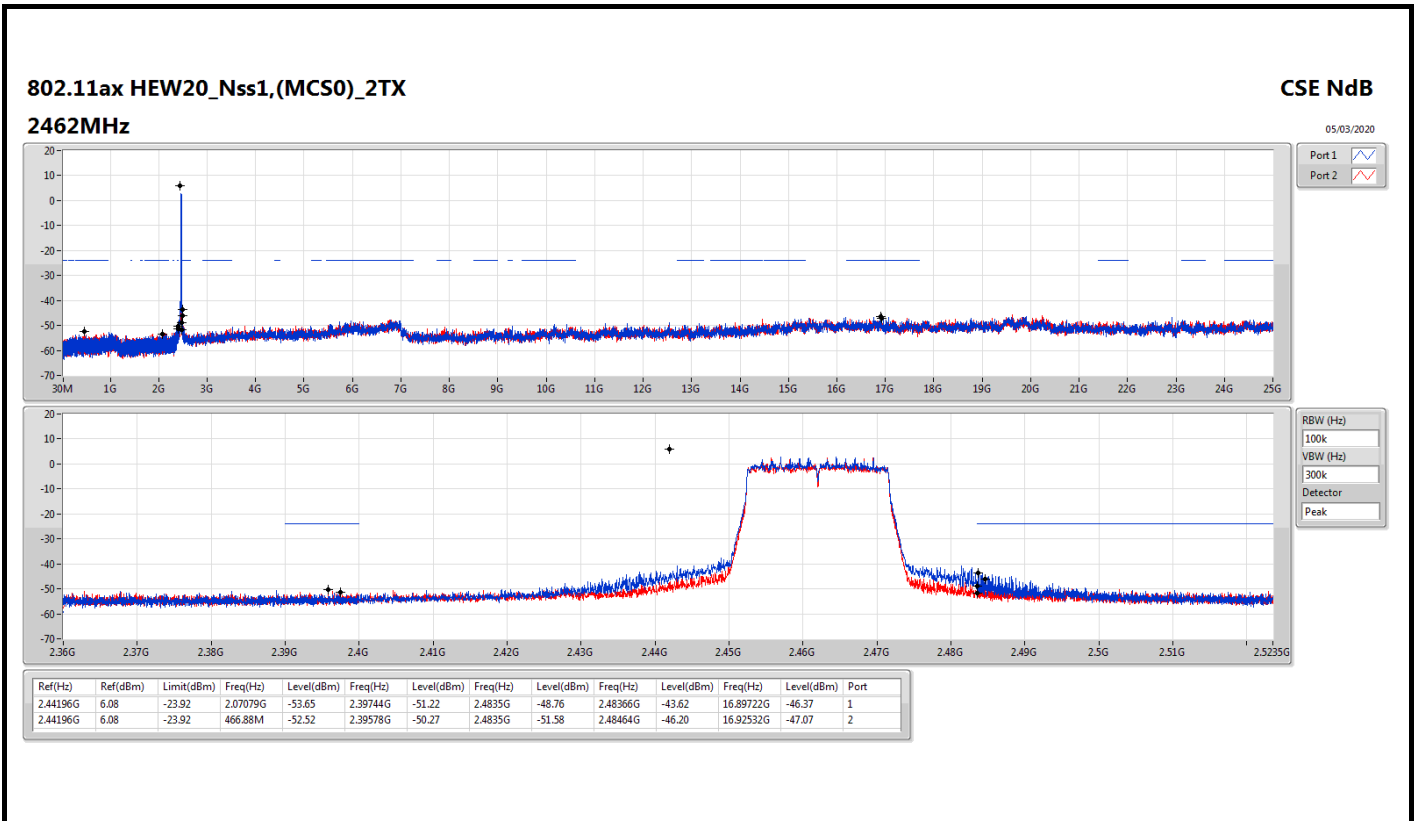



<2T2S>



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2.(MCS0)_2TX	Pass	2.41695G	3.43	-26.57	916.86M	-52.60	2.39958G	-37.27	2.4G	-38.36	2.4858G	-50.47	17.40575G	-41.45	2



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.40572G	3.63	-26.37	831.52M	-52.83	2.39698G	-38.13	2.4G	-42.40	2.51002G	-50.79	21.87577G	-40.11	1
2412MHz	Pass	2.41695G	3.43	-26.57	916.86M	-52.60	2.39958G	-37.27	2.4G	-38.36	2.4858G	-50.47	17.40575G	-41.45	2
2462MHz	Pass	2.45574G	3.73	-26.27	724.34M	-52.64	2.39638G	-50.62	2.4835G	-48.85	2.48418G	-41.59	17.00679G	-41.78	1
2462MHz	Pass	2.46701G	3.79	-26.21	1.82643G	-52.33	2.39052G	-50.61	2.4835G	-48.60	2.48504G	-48.18	16.85789G	-41.74	2

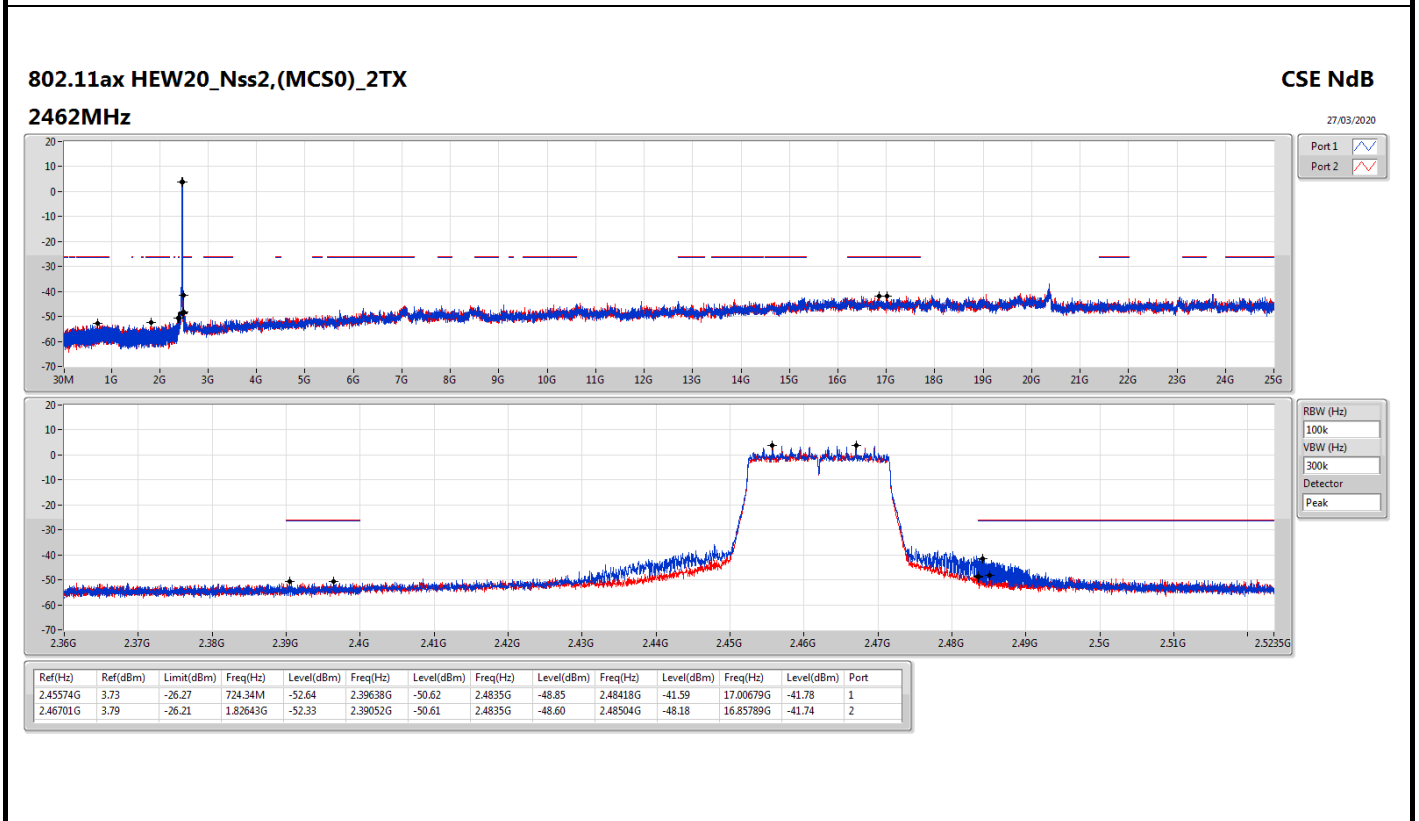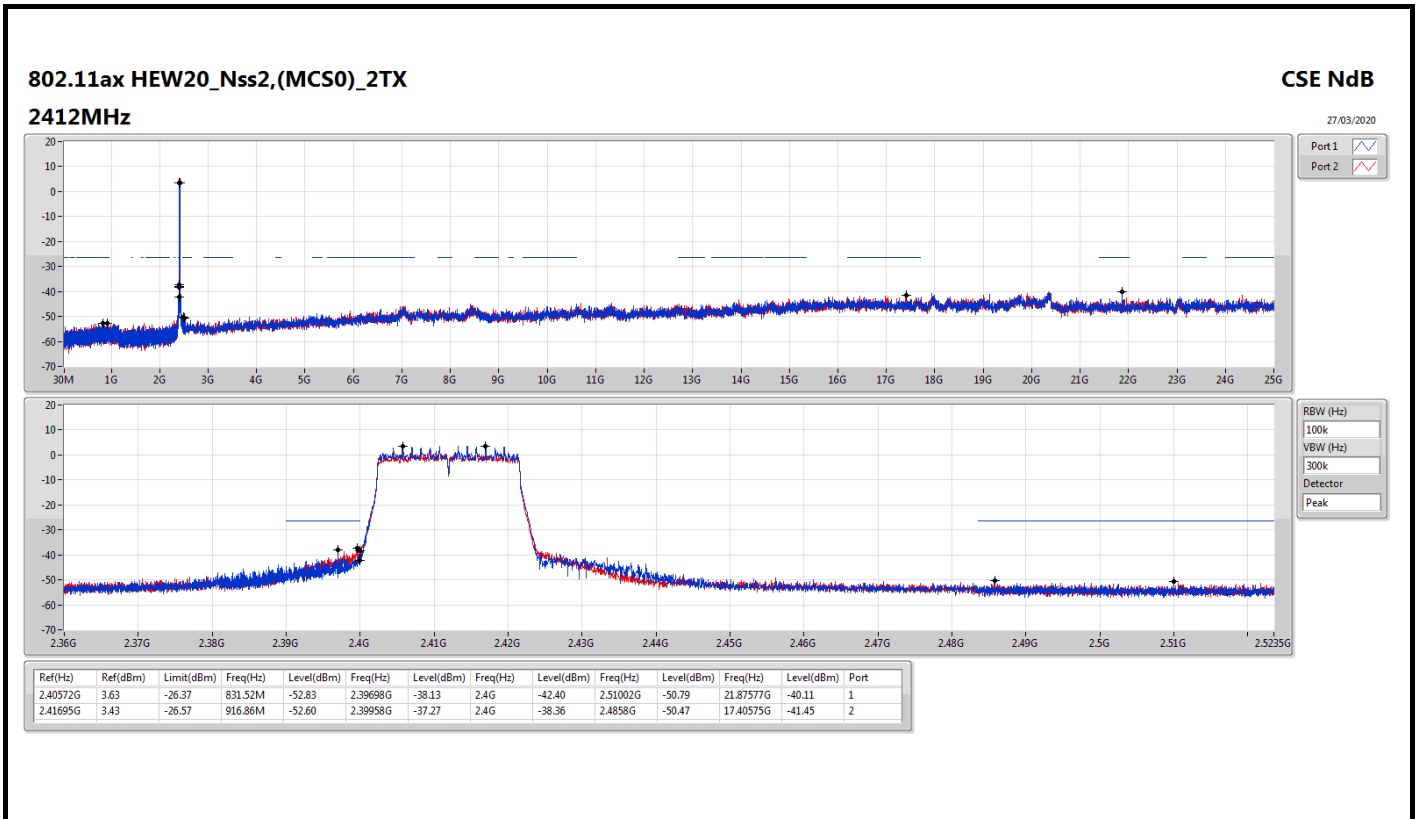




Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	30M	35.72	40.00	-4.28	Vertical

Mode 1

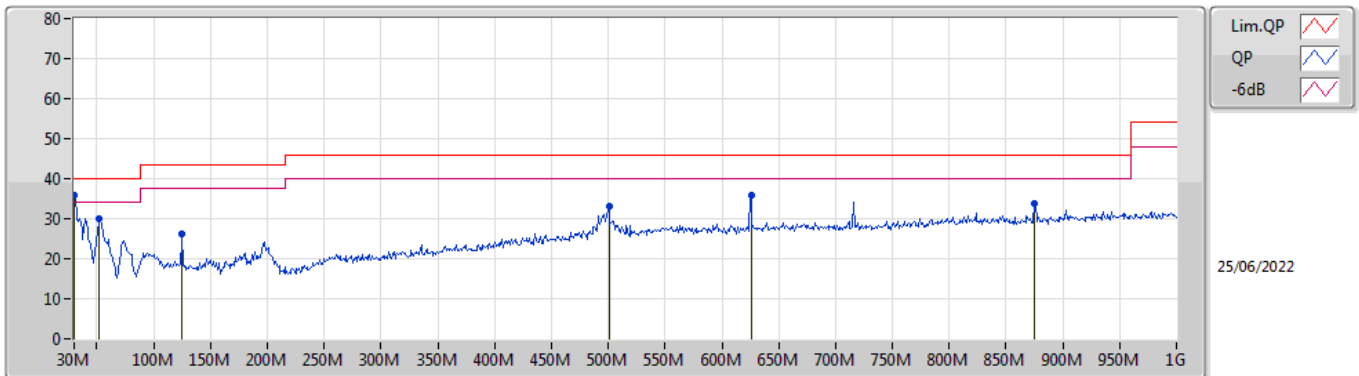

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	30M	35.72	40.00	-4.28	-6.76	3	Vertical	192	1.00	"Worst"	42.48	23.99	0.80	31.55
PK	52.31M	29.92	40.00	-10.08	-17.61	3	Vertical	360	1.00	-	47.53	13.16	1.10	31.87
PK	125.06M	26.23	43.50	-17.27	-12.44	3	Vertical	151	2.00	-	38.67	17.89	1.65	31.98
PK	500.45M	33.14	46.00	-12.86	-5.60	3	Vertical	360	1.00	-	38.74	23.20	3.60	32.40
PK	625.58M	35.86	46.00	-10.14	-3.89	3	Vertical	248	1.00	-	39.75	24.53	4.10	32.52
PK	874.87M	33.64	46.00	-12.36	-1.26	3	Vertical	175	1.50	-	34.90	26.03	5.20	32.49

Mode 1

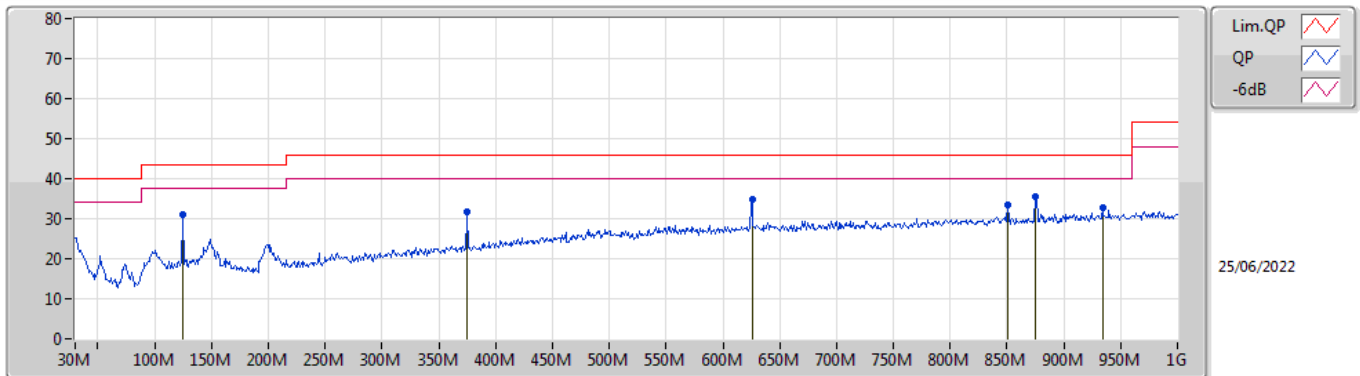

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	125.06M	31.02	43.50	-12.48	-12.44	3	Horizontal	203	1.50	-	43.46	17.89	1.65	31.98
PK	375.32M	31.62	46.00	-14.38	-8.24	3	Horizontal	258	1.00	-	39.86	20.83	3.10	32.17
PK	625.58M	34.77	46.00	-11.23	-3.89	3	Horizontal	173	1.50	-	38.66	24.53	4.10	32.52
PK	850.62M	33.54	46.00	-12.46	-1.51	3	Horizontal	113	1.00	-	35.05	25.88	5.10	32.49
PK	874.87M	35.36	46.00	-10.64	-1.26	3	Horizontal	254	1.00	"Worst"	36.62	26.03	5.20	32.49
PK	934.04M	32.65	46.00	-13.35	-0.67	3	Horizontal	184	1.00	-	33.32	26.31	5.50	32.48




For Radiated Cabinet:

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	AV	7.31874G	36.74	54.00	-17.26	3	Horizontal	239	1.80	-

802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

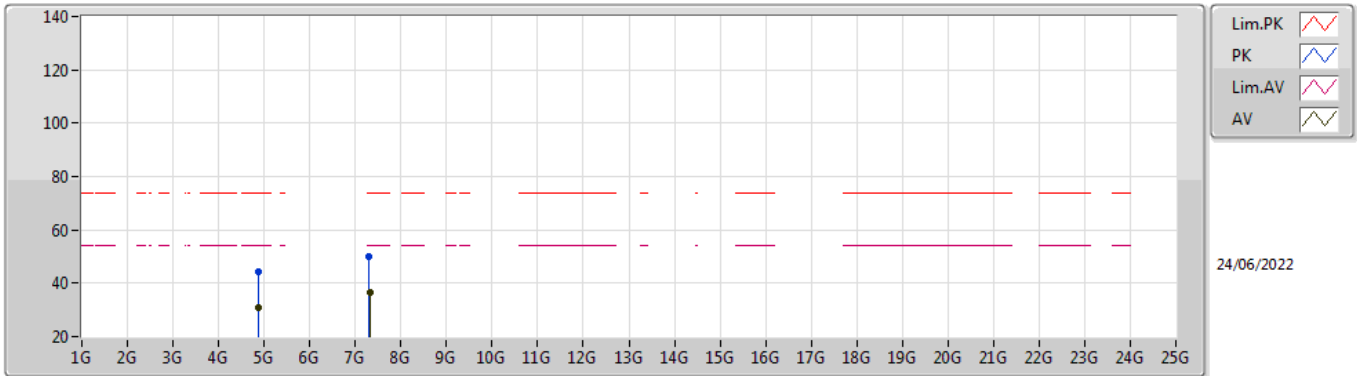


EUT Y_2TX
Setting 17
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87952G	44.46	74.00	-29.54	38.40	3	Vertical	86	2.06	-	33.16	5.10	32.20
AV	4.88462G	31.07	54.00	-22.93	25.00	3	Vertical	86	2.06	-	33.17	5.10	32.20
PK	7.30152G	50.15	74.00	-23.85	40.40	3	Vertical	324	1.79	-	36.40	6.15	32.80
AV	7.317G	36.68	54.00	-17.32	26.92	3	Vertical	324	1.79	-	36.43	6.16	32.83

802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

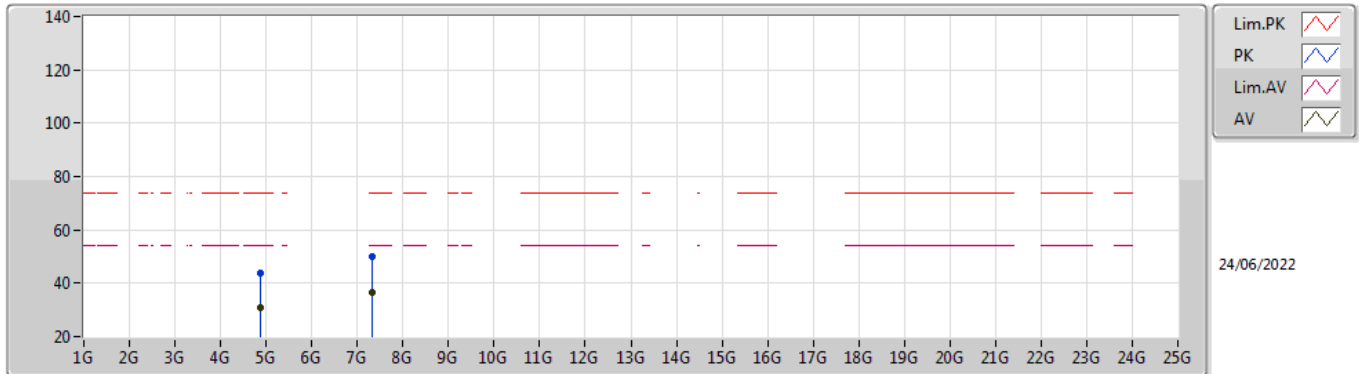

EUT Y_2TX
Setting 17
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88234G	43.73	74.00	-30.27	37.67	3	Horizontal	344	1.79	-	33.16	5.10	32.20
AV	4.8845G	30.69	54.00	-23.31	24.62	3	Horizontal	344	1.79	-	33.17	5.10	32.20
PK	7.32402G	49.87	74.00	-24.13	40.10	3	Horizontal	239	1.80	-	36.45	6.16	32.84
AV	7.31874G	36.74	54.00	-17.26	26.97	3	Horizontal	239	1.80	-	36.44	6.16	32.83

<2T1S>

For Conducted Harmonic (1~3GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.4835G	2.5235G	AV	2.49686G	5.29	-51.57	-51.61	-48.58	-43.29	-41.2	-2.09
802.11g_Nss1,(6Mbps)_2TX	Pass	2.36G	2.4G	PK	2.38048G	4.73	-40.15	-27.47	-27.24	-22.51	-21.2	-1.31
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	2.36G	2.4G	AV	2.3888G	4.73	-57.99	-48.09	-47.67	-42.94	-41.2	-1.74

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX





Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dB)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	2.35728G	4.73	-58.71	-56.57	-54.5	-49.77	-41.2	-8.57
2412MHz	Pass	2.36G	2.4G	AV	2.3884G	4.73	-56.84	-50.4	-49.51	-44.78	-41.2	-3.58
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	4.73	-78.33	-78.42	-75.36	-70.63	-41.2	-29.43
2412MHz	Pass	2.4835G	2.5235G	AV	2.49238G	4.73	-61.01	-60.99	-57.99	-53.26	-41.2	-12.06
2412MHz	Pass	2.5235G	3G	AV	2.52767G	4.73	-63.62	-64.34	-60.95	-56.22	-41.2	-15.02
2412MHz	Pass	1G	2.36G	PK	2.35354G	4.73	-48.36	-47.06	-44.65	-39.92	-21.2	-18.72
2412MHz	Pass	2.36G	2.4G	PK	2.38272G	4.73	-46.99	-42.39	-41.1	-36.37	-21.2	-15.17
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	4.73	-68.81	-68.95	-65.87	-61.14	-21.2	-39.94
2412MHz	Pass	2.4835G	2.5235G	PK	2.49718G	4.73	-50.14	-52.11	-48	-43.27	-21.2	-22.07
2412MHz	Pass	2.5235G	3G	PK	2.54447G	4.73	-54.76	-52.22	-50.3	-45.57	-21.2	-24.37
2437MHz	Pass	1G	2.36G	AV	1.94962G	5.19	-59.09	-58.66	-55.86	-50.67	-41.2	-9.47
2437MHz	Pass	2.36G	2.4G	AV	2.3724G	5.19	-57.64	-57.14	-54.37	-49.18	-41.2	-7.98
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.19	-75.38	-75.48	-72.42	-67.23	-41.2	-26.03
2437MHz	Pass	2.4835G	2.5235G	AV	2.50174G	5.19	-59.58	-58.81	-56.17	-50.98	-41.2	-9.78
2437MHz	Pass	2.5235G	3G	AV	2.53553G	5.19	-61.5	-62.09	-58.77	-53.58	-41.2	-12.38
2437MHz	Pass	1G	2.36G	PK	2.32838G	5.19	-51.35	-49.8	-47.5	-42.31	-21.2	-21.11
2437MHz	Pass	2.36G	2.4G	PK	2.37184G	5.19	-46.32	-48.79	-44.37	-39.18	-21.2	-17.98
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.19	-66	-66.2	-63.09	-57.90	-21.2	-36.70
2437MHz	Pass	2.4835G	2.5235G	PK	2.50502G	5.19	-49.13	-49.13	-46.12	-40.93	-21.2	-19.73
2437MHz	Pass	2.5235G	3G	PK	2.53255G	5.19	-51.54	-50.46	-47.96	-42.77	-21.2	-21.57
2462MHz	Pass	1G	2.36G	AV	2.36G	5.29	-57.84	-56.8	-54.28	-48.99	-41.2	-7.79
2462MHz	Pass	2.36G	2.4G	AV	2.3612G	5.29	-55.13	-55.43	-52.27	-46.98	-41.2	-5.78
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.29	-78.5	-77.96	-75.21	-69.92	-41.2	-28.72
2462MHz	Pass	2.4835G	2.5235G	AV	2.49686G	5.29	-51.57	-51.61	-48.58	-43.29	-41.2	-2.09
2462MHz	Pass	2.5235G	3G	AV	2.52493G	5.29	-55.76	-56.65	-53.17	-47.88	-41.2	-6.68
2462MHz	Pass	1G	2.36G	PK	2.35915G	5.29	-50.28	-47.14	-45.42	-40.13	-21.2	-18.93
2462MHz	Pass	2.36G	2.4G	PK	2.38912G	5.29	-45.73	-45.87	-42.79	-37.50	-21.2	-16.30
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.29	-69.14	-68.77	-65.94	-60.65	-21.2	-39.45
2462MHz	Pass	2.4835G	2.5235G	PK	2.4967G	5.29	-40.58	-43.36	-38.74	-33.45	-21.2	-12.25
2462MHz	Pass	2.5235G	3G	PK	2.52755G	5.29	-47.22	-45.44	-43.23	-37.94	-21.2	-16.74
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	1.75701G	4.73	-78.63	-53.75	-53.74	-49.01	-41.2	-7.81
2412MHz	Pass	2.36G	2.4G	AV	2.37824G	4.73	-55.32	-50.75	-49.45	-44.72	-41.2	-3.52
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	4.73	-78.1	-78.93	-75.48	-70.75	-41.2	-29.55
2412MHz	Pass	2.4835G	2.5235G	AV	2.50734G	4.73	-60.29	-61.06	-57.65	-52.92	-41.2	-11.72
2412MHz	Pass	2.5235G	3G	AV	2.52386G	4.73	-63.05	-62.91	-59.97	-55.24	-41.2	-14.04
2412MHz	Pass	1G	2.36G	PK	2.36G	4.73	-50.24	-42.45	-41.78	-37.05	-21.2	-15.85
2412MHz	Pass	2.36G	2.4G	PK	2.38048G	4.73	-40.15	-27.47	-27.24	-22.51	-21.2	-1.31
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	4.73	-68.9	-69.24	-66.06	-61.33	-21.2	-40.13
2412MHz	Pass	2.4835G	2.5235G	PK	2.50182G	4.73	-51.02	-50.29	-47.63	-42.90	-21.2	-21.70
2412MHz	Pass	2.5235G	3G	PK	2.52517G	4.73	-53.55	-52.48	-49.97	-45.24	-21.2	-24.04
2437MHz	Pass	1G	2.36G	AV	2.35932G	5.19	-57.57	-55.59	-53.46	-48.27	-41.2	-7.07
2437MHz	Pass	2.36G	2.4G	AV	2.378G	5.19	-53.98	-54.81	-51.36	-46.17	-41.2	-4.97
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.19	-78.55	-78.38	-75.45	-70.26	-41.2	-29.06
2437MHz	Pass	2.4835G	2.5235G	AV	2.49886G	5.19	-55.42	-54.72	-52.05	-46.86	-41.2	-5.66
2437MHz	Pass	2.5235G	3G	AV	2.52362G	5.19	-58.2	-59.22	-55.67	-50.48	-41.2	-9.28
2437MHz	Pass	1G	2.36G	PK	2.35983G	5.19	-48.4	-45.3	-43.57	-38.38	-21.2	-17.18
2437MHz	Pass	2.36G	2.4G	PK	2.38056G	5.19	-36.15	-39.41	-34.47	-29.28	-21.2	-8.08
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.19	-68.89	-69.22	-66.04	-60.85	-21.2	-39.65
2437MHz	Pass	2.4835G	2.5235G	PK	2.50134G	5.19	-45	-41.87	-40.15	-34.96	-21.2	-13.76
2437MHz	Pass	2.5235G	3G	PK	2.52636G	5.19	-48.49	-48.9	-45.68	-40.49	-21.2	-19.29
2462MHz	Pass	1G	2.36G	AV	1.96968G	5.29	-60.13	-59.03	-56.53	-51.24	-41.2	-10.04
2462MHz	Pass	2.36G	2.4G	AV	2.36496G	5.29	-59.7	-58.55	-56.08	-50.79	-41.2	-9.59
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.29	-78.54	-78.62	-75.57	-70.28	-41.2	-29.08
2462MHz	Pass	2.4835G	2.5235G	AV	2.49726G	5.29	-55.83	-55.03	-52.4	-47.11	-41.2	-5.91
2462MHz	Pass	2.5235G	3G	AV	2.52374G	5.29	-59.24	-59.87	-56.53	-51.24	-41.2	-10.04
2462MHz	Pass	1G	2.36G	PK	2.35932G	5.29	-49.96	-53.01	-48.21	-42.92	-21.2	-21.72
2462MHz	Pass	2.36G	2.4G	PK	2.36704G	5.29	-50.64	-47.1	-45.51	-40.22	-21.2	-19.02
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.29	-68.34	-68.34	-65.33	-60.04	-21.2	-38.84
2462MHz	Pass	2.4835G	2.5235G	PK	2.4987G	5.29	-39.3	-38.89	-36.08	-30.79	-21.2	-9.59
2462MHz	Pass	2.5235G	3G	PK	2.52469G	5.29	-49.27	-49.19	-46.22	-40.93	-21.2	-19.73
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	2.35779G	4.73	-57.66	-56.01	-53.75	-49.02	-41.2	-7.82
2412MHz	Pass	2.36G	2.4G	AV	2.3888G	4.73	-57.99	-48.09	-47.67	-42.94	-41.2	-1.74
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	4.73	-78.5	-78.95	-75.71	-70.98	-41.2	-29.78
2412MHz	Pass	2.4835G	2.5235G	AV	2.50574G	4.73	-61.71	-60.55	-58.08	-53.35	-41.2	-12.15
2412MHz	Pass	2.5235G	3G	AV	2.53172G	4.73	-63.03	-63.05	-60.03	-55.30	-41.2	-14.10

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2412MHz	Pass	1G	2.36G	PK	2.35949G	4.73	-49.71	-42.79	-41.99	-37.26	-21.2	-16.06
2412MHz	Pass	2.36G	2.4G	PK	2.3828G	4.73	-39.99	-28.25	-27.97	-23.24	-21.2	-2.04
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	4.73	-68.67	-68.62	-65.63	-60.90	-21.2	-39.70
2412MHz	Pass	2.4835G	2.5235G	PK	2.52046G	4.73	-49.15	-52.95	-47.64	-42.91	-21.2	-21.71
2412MHz	Pass	2.5235G	3G	PK	2.54196G	4.73	-51.93	-54.89	-50.15	-45.42	-21.2	-24.22
2437MHz	Pass	1G	2.36G	AV	2.35864G	5.19	-57.95	-56.62	-54.22	-49.03	-41.2	-7.83
2437MHz	Pass	2.36G	2.4G	AV	2.3792G	5.19	-53.83	-53.22	-50.5	-45.31	-41.2	-4.11
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.19	-78.8	-78.35	-75.56	-70.37	-41.2	-29.17
2437MHz	Pass	2.4835G	2.5235G	AV	2.49878G	5.19	-55.15	-54.61	-51.86	-46.67	-41.2	-5.47
2437MHz	Pass	2.5235G	3G	AV	2.526G	5.19	-58.53	-60.09	-56.23	-51.04	-41.2	-9.84
2437MHz	Pass	1G	2.36G	PK	2.35371G	5.19	-45.44	-51.96	-44.57	-39.38	-21.2	-18.18
2437MHz	Pass	2.36G	2.4G	PK	2.37504G	5.19	-33.87	-35.06	-31.41	-26.22	-21.2	-5.02
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.19	-68.73	-68.78	-65.74	-60.55	-21.2	-39.35
2437MHz	Pass	2.4835G	2.5235G	PK	2.49798G	5.19	-44.06	-41.14	-39.35	-34.16	-21.2	-12.96
2437MHz	Pass	2.5235G	3G	PK	2.52481G	5.19	-48.57	-49.48	-45.99	-40.80	-21.2	-19.60
2462MHz	Pass	1G	2.36G	AV	1.96968G	5.29	-59.61	-58.54	-56.03	-50.74	-41.2	-9.54
2462MHz	Pass	2.36G	2.4G	AV	2.3664G	5.29	-59.92	-60.14	-57.02	-51.73	-41.2	-10.53
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.29	-78.68	-78.6	-75.63	-70.34	-41.2	-29.14
2462MHz	Pass	2.4835G	2.5235G	AV	2.49702G	5.29	-56.79	-56.94	-53.85	-48.56	-41.2	-7.36
2462MHz	Pass	2.5235G	3G	AV	2.53077G	5.29	-59.95	-61.37	-57.59	-52.30	-41.2	-11.10
2462MHz	Pass	1G	2.36G	PK	2.35881G	5.29	-53.85	-50.92	-49.13	-43.84	-21.2	-22.64
2462MHz	Pass	2.36G	2.4G	PK	2.36616G	5.29	-48.64	-50.61	-46.5	-41.21	-21.2	-20.01
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.29	-68.18	-69.99	-65.98	-60.69	-21.2	-39.49
2462MHz	Pass	2.4835G	2.5235G	PK	2.49766G	5.29	-42.28	-42.01	-39.13	-33.84	-21.2	-12.64
2462MHz	Pass	2.5235G	3G	PK	2.53255G	5.29	-49.69	-50.54	-47.08	-41.79	-21.2	-20.59

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

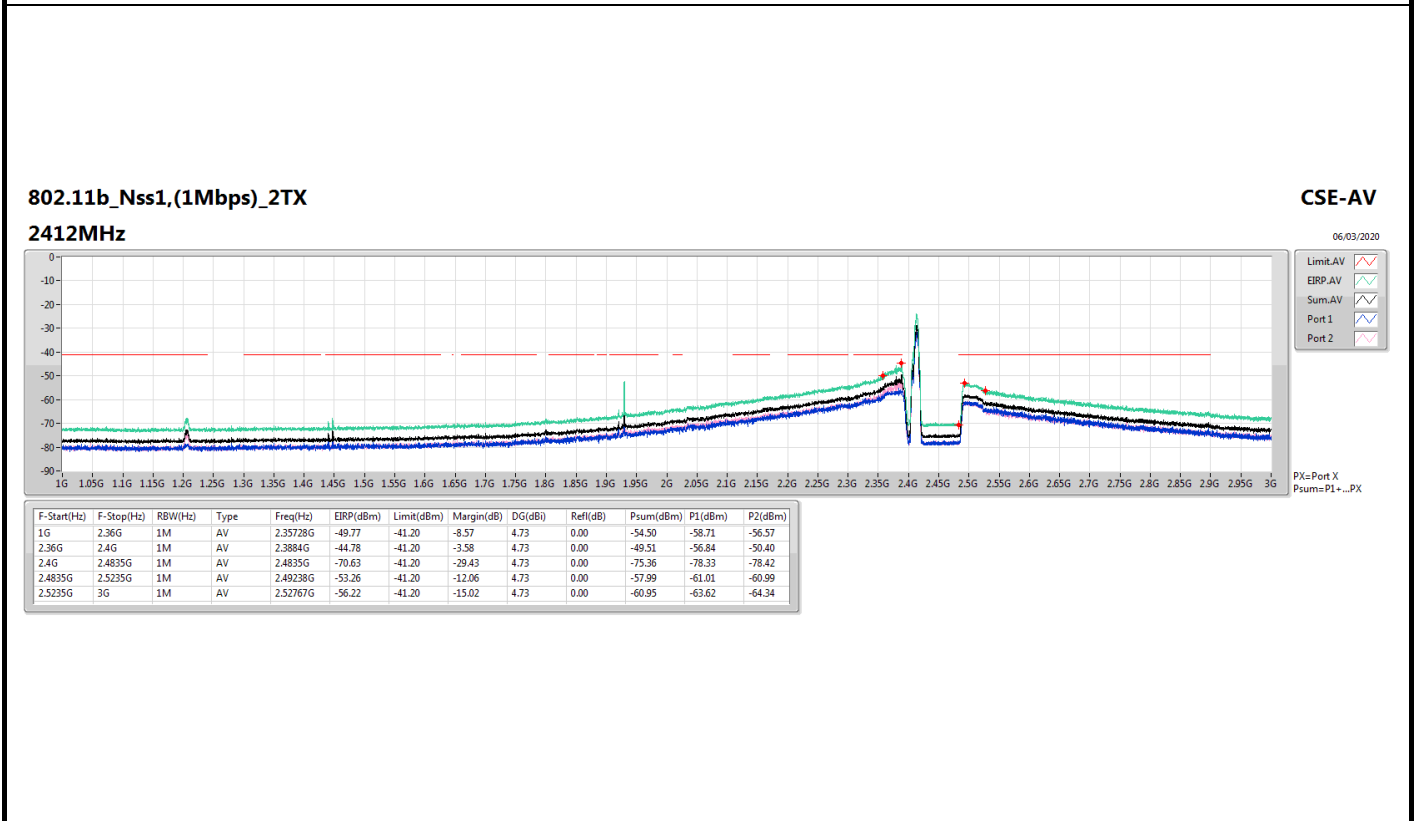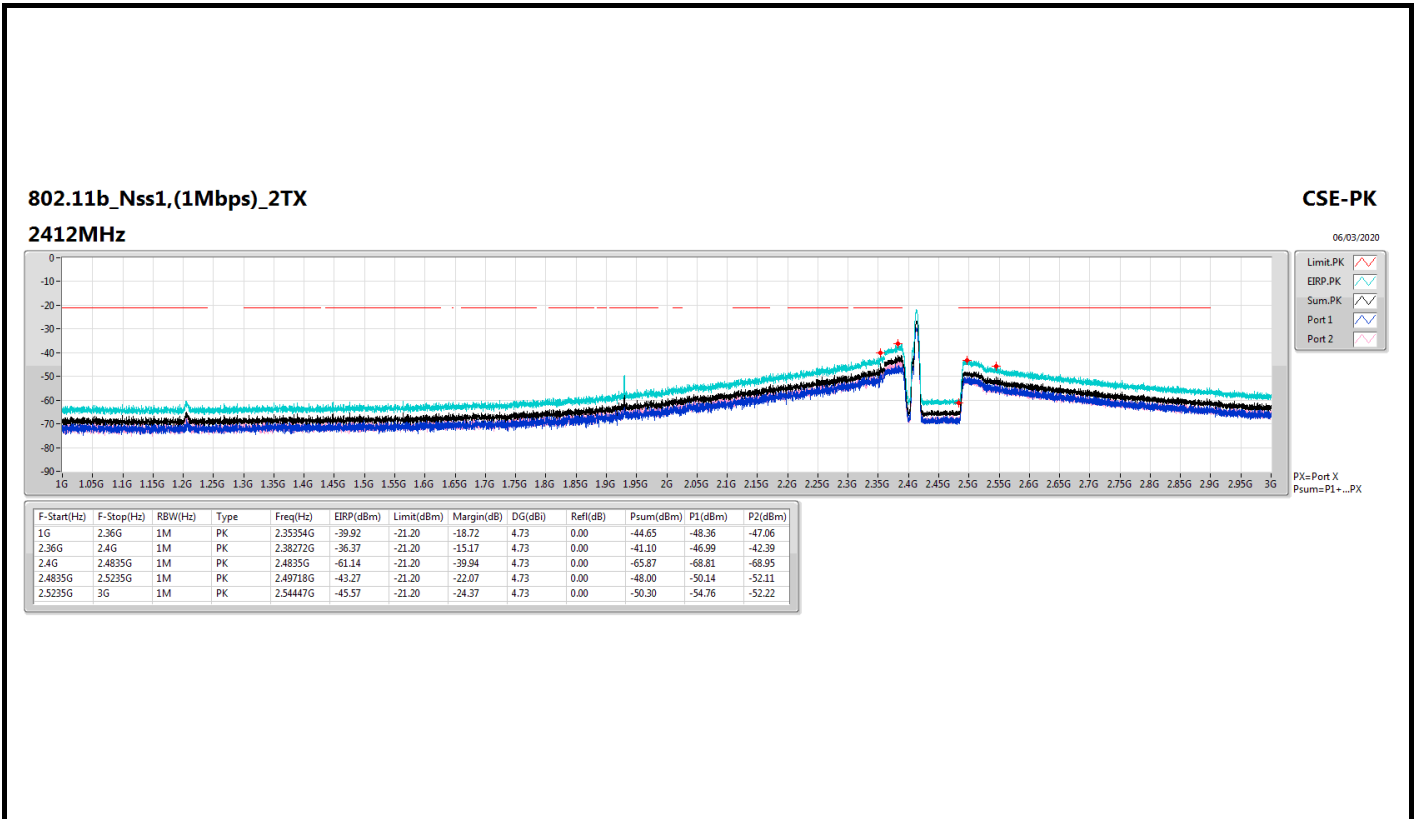


802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE [PK]

26/06/2022

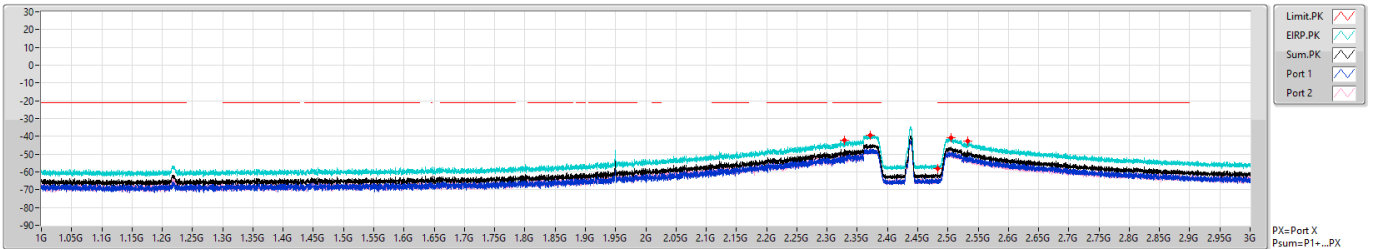


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.32838G	-42.31	-21.20	-21.11	5.19	0.00	-47.50	-51.35	-49.80
2.36G	2.4G	1M	PK	2.37184G	-39.18	-21.20	-17.98	5.19	0.00	-44.37	-46.32	-48.79
2.4G	2.4835G	1M	PK	2.4835G	-57.90	-21.20	-36.70	5.19	0.00	-63.09	-66.00	-66.20
2.4835G	2.5235G	1M	PK	2.50902G	-40.93	-21.20	-19.73	5.19	0.00	-46.12	-49.13	-49.13
2.5235G	3G	1M	PK	2.53255G	-42.77	-21.20	-21.57	5.19	0.00	-47.96	-51.54	-50.46

802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE [AV]

26/06/2022

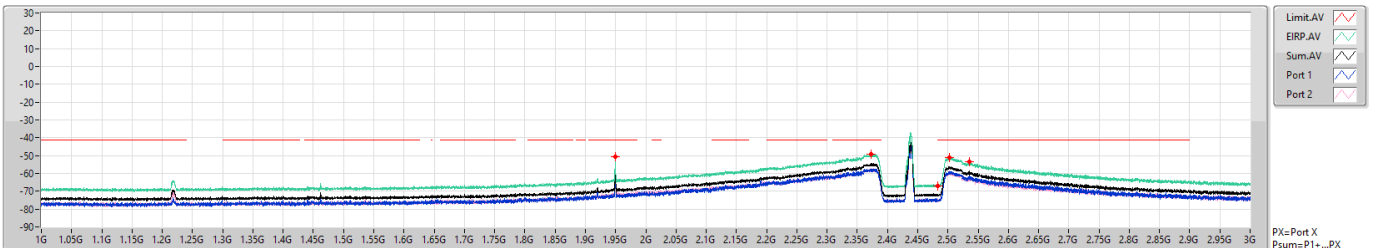


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	1.94962G	-50.67	-41.20	-9.47	5.19	0.00	-55.86	-59.09	-58.66
2.36G	2.4G	1M	AV	2.3724G	-49.18	-41.20	-7.98	5.19	0.00	-54.37	-57.64	-57.14
2.4G	2.4835G	1M	AV	2.4835G	-67.23	-41.20	-26.03	5.19	0.00	-72.42	-75.38	-75.48
2.4835G	2.5235G	1M	AV	2.50174G	-50.98	-41.20	-9.78	5.19	0.00	-56.17	-59.58	-58.81
2.5235G	3G	1M	AV	2.53593G	-53.58	-41.20	-12.38	5.19	0.00	-58.77	-61.50	-62.09

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-PK

06/03/2020

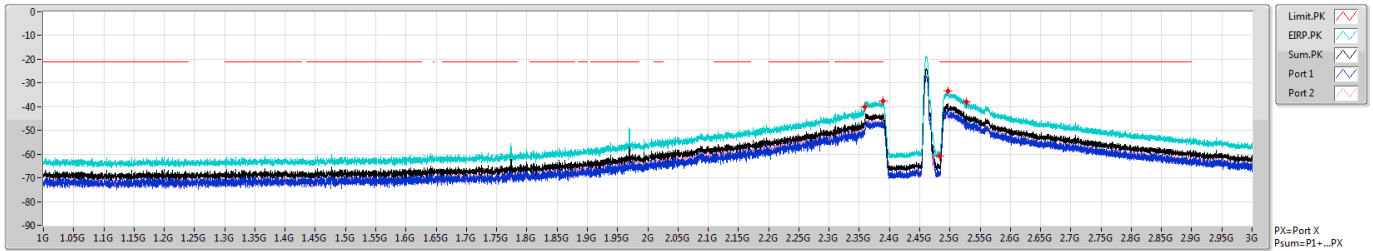


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35915G	-40.13	-21.20	-18.93	5.29	0.00	-45.42	-50.28	-47.14
2.36G	2.4G	1M	PK	2.38912G	-37.50	-21.20	-16.30	5.29	0.00	-42.79	-45.73	-45.87
2.4G	2.4835G	1M	PK	2.4835G	-60.65	-21.20	-39.45	5.29	0.00	-65.94	-69.14	-68.77
2.4835G	2.5235G	1M	PK	2.4967G	-33.45	-21.20	-12.25	5.29	0.00	-38.74	-40.58	-43.36
2.5235G	3G	1M	PK	2.52755G	-37.94	-21.20	-16.74	5.29	0.00	-43.23	-47.22	-45.44

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-AV

06/03/2020

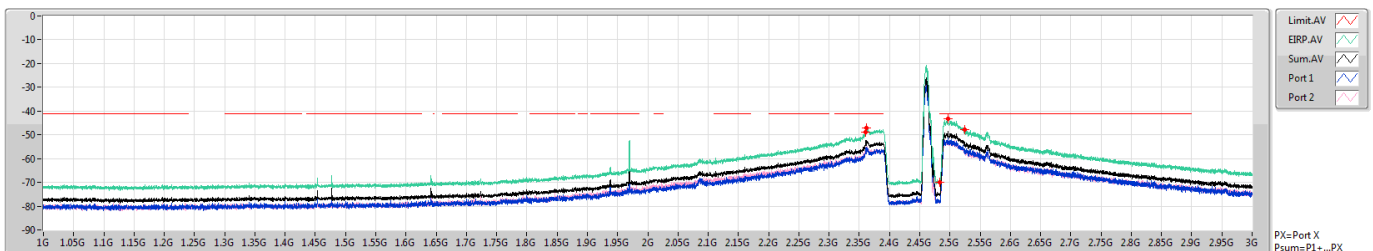


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.36G	-48.99	-41.20	-7.79	5.29	0.00	-54.28	-57.84	-56.80
2.36G	2.4G	1M	AV	2.3612G	-46.98	-41.20	-5.78	5.29	0.00	-52.27	-55.13	-55.43
2.4G	2.4835G	1M	AV	2.4835G	-69.92	-41.20	-28.72	5.29	0.00	-75.21	-78.50	-77.96
2.4835G	2.5235G	1M	AV	2.49686G	-43.29	-41.20	-2.09	5.29	0.00	-48.58	-51.57	-51.61
2.5235G	3G	1M	AV	2.52493G	-47.88	-41.20	-6.68	5.29	0.00	-53.17	-55.76	-56.65

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-PK

06/03/2020

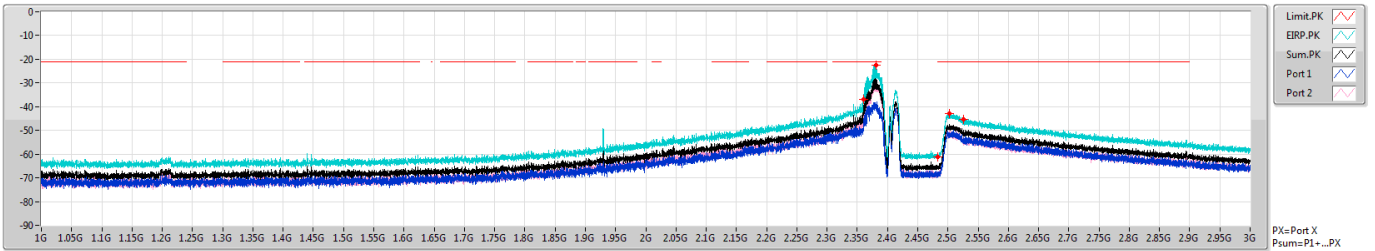


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.36G	-37.05	-21.20	-15.85	4.73	0.00	-41.78	-50.24	-42.45
2.36G	2.4G	1M	PK	2.38048G	-22.51	-21.20	-1.31	4.73	0.00	-27.24	-40.15	-27.47
2.4G	2.4835G	1M	PK	2.4835G	-61.33	-21.20	-40.13	4.73	0.00	-66.06	-68.90	-69.24
2.4835G	2.5235G	1M	PK	2.50182G	-42.90	-21.20	-21.70	4.73	0.00	-47.63	-51.02	-50.29
2.5235G	3G	1M	PK	2.52517G	-45.24	-21.20	-24.04	4.73	0.00	-49.97	-53.55	-52.48

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-AV

06/03/2020

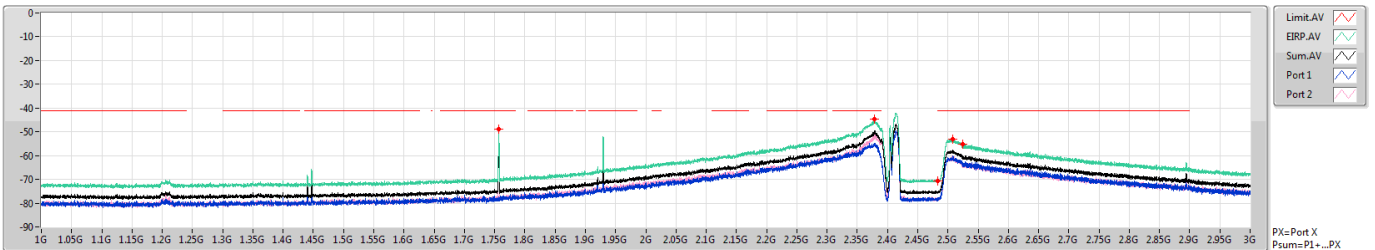


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	1.75701G	-49.01	-41.20	-7.81	4.73	0.00	-53.74	-78.63	-53.75
2.36G	2.4G	1M	AV	2.37824G	-44.72	-41.20	-3.52	4.73	0.00	-49.45	-55.32	-50.75
2.4G	2.4835G	1M	AV	2.4835G	-70.75	-41.20	-29.55	4.73	0.00	-75.48	-78.10	-78.93
2.4835G	2.5235G	1M	AV	2.50794G	-52.92	-41.20	-11.72	4.73	0.00	-57.65	-60.29	-61.06
2.5235G	3G	1M	AV	2.52386G	-55.24	-41.20	-14.04	4.73	0.00	-59.97	-63.05	-62.91

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-PK

06/03/2020

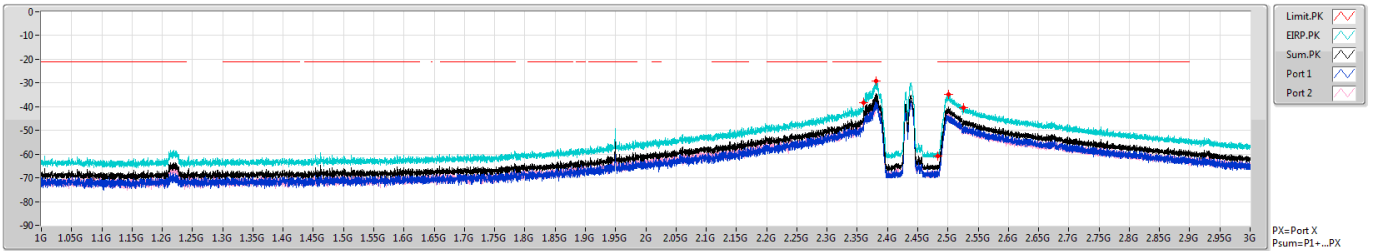


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35983G	-38.38	-21.20	-17.18	5.19	0.00	-43.57	-48.40	-45.30
2.36G	2.4G	1M	PK	2.38956G	-29.28	-21.20	-8.08	5.19	0.00	-34.47	-36.15	-39.41
2.4G	2.4835G	1M	PK	2.4835G	-60.85	-21.20	-39.65	5.19	0.00	-66.04	-68.89	-69.22
2.4835G	2.5235G	1M	PK	2.50134G	-34.96	-21.20	-13.76	5.19	0.00	-40.15	-45.00	-41.87
2.5235G	3G	1M	PK	2.52636G	-40.49	-21.20	-19.29	5.19	0.00	-45.68	-48.49	-48.90

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-AV

06/03/2020

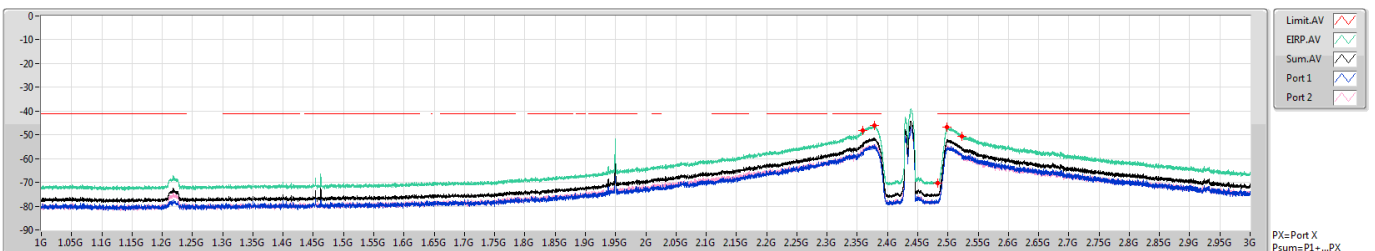


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.35932G	-48.27	-41.20	-7.07	5.19	0.00	-53.46	-57.57	-55.59
2.36G	2.4G	1M	AV	2.378G	-46.17	-41.20	-4.97	5.19	0.00	-51.36	-53.98	-54.81
2.4G	2.4835G	1M	AV	2.4835G	-70.26	-41.20	-29.06	5.19	0.00	-75.45	-78.55	-78.38
2.4835G	2.5235G	1M	AV	2.49886G	-46.86	-41.20	-5.66	5.19	0.00	-52.05	-55.42	-54.72
2.5235G	3G	1M	AV	2.5262G	-50.48	-41.20	-9.28	5.19	0.00	-55.67	-58.20	-59.22

802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-PK

06/03/2020

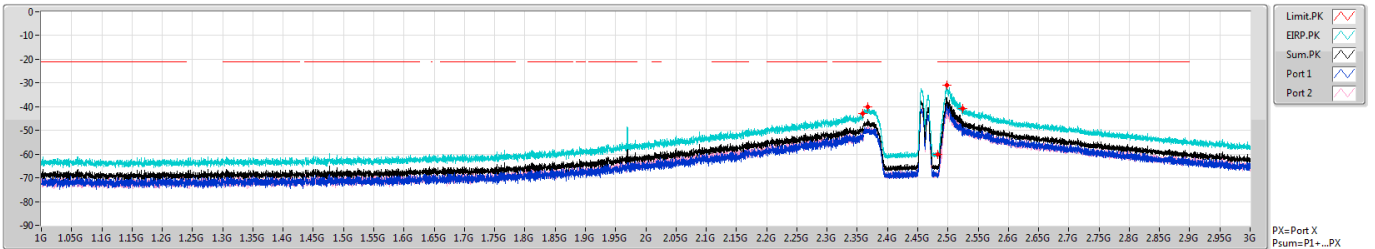


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35932G	-42.92	-21.20	-21.72	5.29	0.00	-48.21	-49.96	-53.01
2.36G	2.4G	1M	PK	2.36704G	-40.22	-21.20	-19.02	5.29	0.00	-45.51	-50.64	-47.10
2.4G	2.4835G	1M	PK	2.4835G	-60.04	-21.20	-38.84	5.29	0.00	-65.33	-68.34	-68.34
2.4835G	2.5235G	1M	PK	2.4987G	-30.79	-21.20	-9.59	5.29	0.00	-36.08	-39.30	-38.89
2.5235G	3G	1M	PK	2.52469G	-40.93	-21.20	-19.73	5.29	0.00	-46.22	-49.27	-49.19

802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-AV

06/03/2020

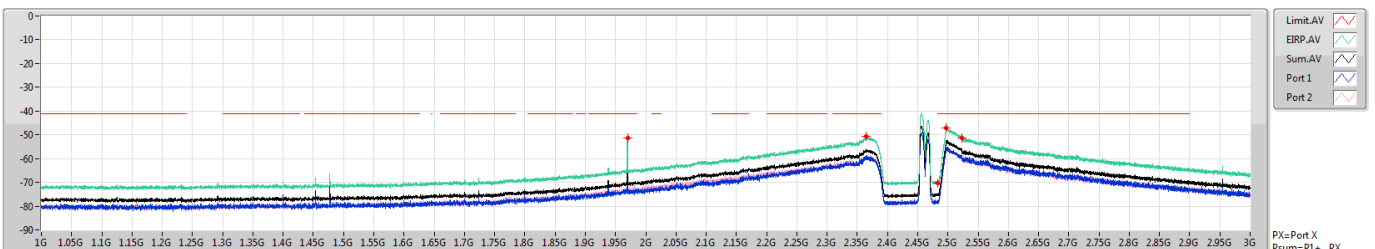


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	1.96968G	-51.24	-41.20	-10.04	5.29	0.00	-56.53	-60.13	-59.03
2.36G	2.4G	1M	AV	2.36496G	-50.79	-41.20	-9.59	5.29	0.00	-56.08	-59.70	-58.55
2.4G	2.4835G	1M	AV	2.4835G	-70.28	-41.20	-29.08	5.29	0.00	-75.57	-78.54	-78.62
2.4835G	2.5235G	1M	AV	2.49726G	-47.11	-41.20	-5.91	5.29	0.00	-52.40	-55.83	-55.03
2.5235G	3G	1M	AV	2.52374G	-51.24	-41.20	-10.04	5.29	0.00	-56.53	-59.24	-59.87

802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz

CSE-PK

06/03/2020

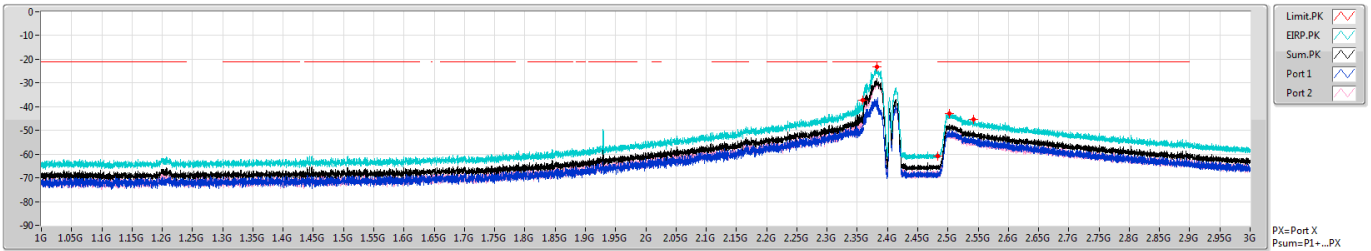


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35949G	-37.26	-21.20	-16.06	4.73	0.00	-41.99	-49.71	-42.79
2.36G	2.4G	1M	PK	2.3828G	-23.24	-21.20	-2.04	4.73	0.00	-27.97	-39.99	-28.25
2.4G	2.4835G	1M	PK	2.4835G	-60.90	-21.20	-39.70	4.73	0.00	-65.63	-68.67	-68.62
2.4835G	2.5235G	1M	PK	2.50246G	-42.91	-21.20	-21.71	4.73	0.00	-47.64	-49.15	-52.95
2.5235G	3G	1M	PK	2.54196G	-45.42	-21.20	-24.22	4.73	0.00	-50.15	-51.93	-54.89

802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz

CSE-AV

06/03/2020

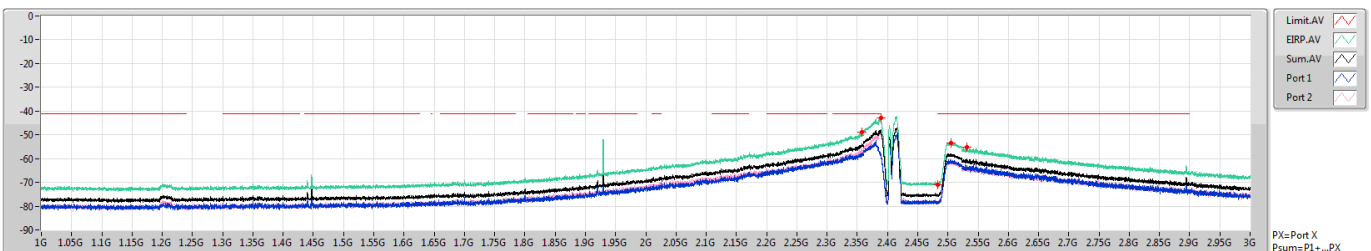


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.35779G	-49.02	-41.20	-7.82	4.73	0.00	-53.75	-57.66	-56.01
2.36G	2.4G	1M	AV	2.3888G	-42.94	-41.20	-1.74	4.73	0.00	-47.67	-57.99	-48.09
2.4G	2.4835G	1M	AV	2.4835G	-70.98	-41.20	-29.78	4.73	0.00	-75.71	-78.50	-78.95
2.4835G	2.5235G	1M	AV	2.50574G	-53.35	-41.20	-12.15	4.73	0.00	-58.08	-61.71	-60.55
2.5235G	3G	1M	AV	2.53172G	-55.30	-41.20	-14.10	4.73	0.00	-60.03	-63.03	-63.05

802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz

CSE-PK

06/03/2020

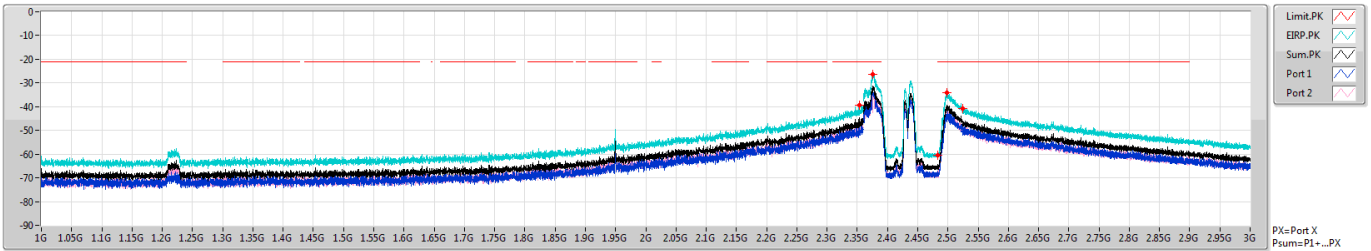


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35371G	-39.38	-21.20	-18.18	5.19	0.00	-44.57	-45.44	-51.96
2.36G	2.4G	1M	PK	2.37504G	-26.22	-21.20	-5.02	5.19	0.00	-31.41	-33.87	-35.06
2.4G	2.4835G	1M	PK	2.4835G	-60.55	-21.20	-39.35	5.19	0.00	-65.74	-68.73	-68.78
2.4835G	2.5235G	1M	PK	2.49798G	-34.16	-21.20	-12.96	5.19	0.00	-39.35	-44.06	-41.14
2.5235G	3G	1M	PK	2.52481G	-40.80	-21.20	-19.60	5.19	0.00	-45.99	-48.57	-49.48

802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz

CSE-AV

06/03/2020

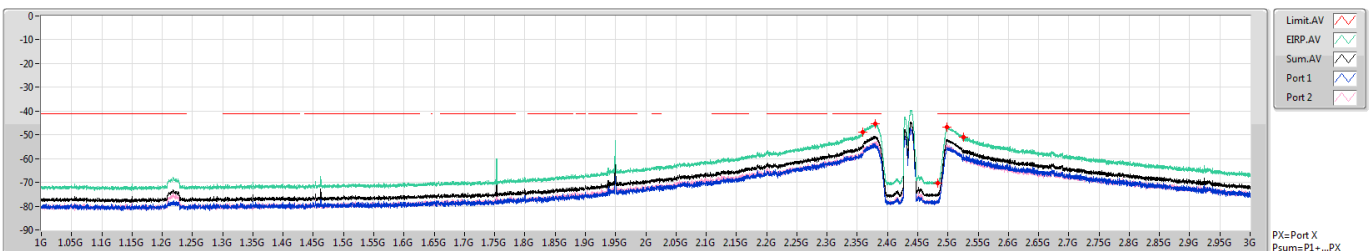


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.35864G	-49.03	-41.20	-7.83	5.19	0.00	-54.22	-57.95	-56.62
2.36G	2.4G	1M	AV	2.3792G	-45.31	-41.20	-4.11	5.19	0.00	-50.50	-53.83	-53.22
2.4G	2.4835G	1M	AV	2.4835G	-70.37	-41.20	-29.17	5.19	0.00	-75.56	-78.80	-78.35
2.4835G	2.5235G	1M	AV	2.49878G	-46.67	-41.20	-5.47	5.19	0.00	-51.86	-55.15	-54.61
2.5235G	3G	1M	AV	2.526G	-51.04	-41.20	-9.84	5.19	0.00	-56.23	-58.53	-60.09

802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz

CSE-PK

06/03/2020

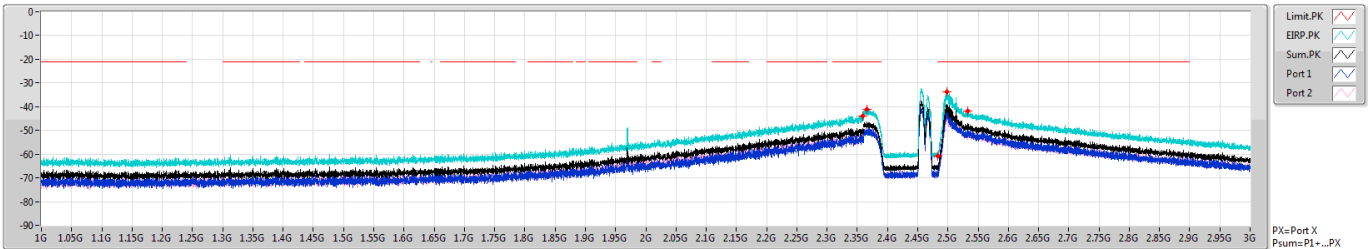


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.3581G	-43.84	-21.20	-22.64	5.29	0.00	-49.13	-53.85	-50.92
2.36G	2.4G	1M	PK	2.3661G	-41.21	-21.20	-20.01	5.29	0.00	-46.50	-48.64	-50.61
2.4G	2.4835G	1M	PK	2.4835G	-60.69	-21.20	-39.49	5.29	0.00	-65.98	-68.18	-69.99
2.4835G	2.5235G	1M	PK	2.4976G	-33.84	-21.20	-12.64	5.29	0.00	-39.13	-42.28	-42.01
2.5235G	3G	1M	PK	2.5325G	-41.79	-21.20	-20.59	5.29	0.00	-47.08	-49.69	-50.54

802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz

CSE-AV

06/03/2020

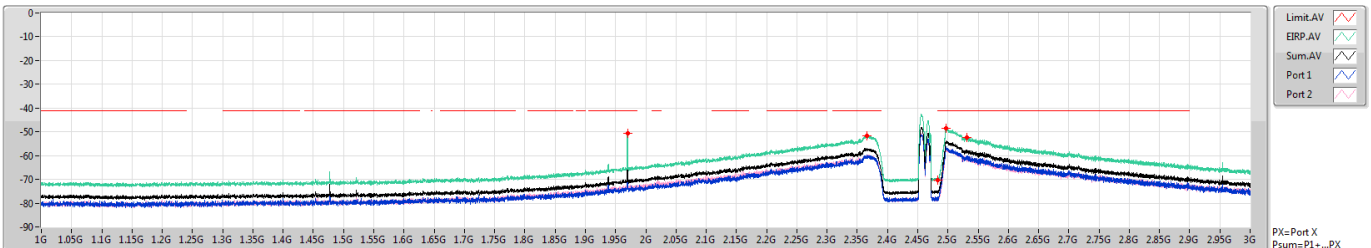

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	1.9698G	-50.74	-41.20	-9.54	5.29	0.00	-56.03	-59.61	-58.54
2.36G	2.4G	1M	AV	2.3664G	-51.73	-41.20	-10.53	5.29	0.00	-57.02	-59.92	-60.14
2.4G	2.4835G	1M	AV	2.4835G	-70.34	-41.20	-29.14	5.29	0.00	-75.63	-78.68	-78.60
2.4835G	2.5235G	1M	AV	2.4970G	-48.56	-41.20	-7.36	5.29	0.00	-53.85	-56.79	-56.94
2.5235G	3G	1M	AV	2.5307G	-52.30	-41.20	-11.10	5.29	0.00	-57.59	-59.95	-61.37



<2T2S>

For Conducted Harmonic (1~3GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	2.4835G	2.5235G	AV	2.5003G	2.28	-47.16	-55.22	-46.53	-44.25	-41.20	-3.05

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

Result



Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	1G	2.36G	AV	2.35813G	2.00	-55.58	-58.83	-53.90	-51.90	-41.20	-10.70
2412MHz	Pass	2.36G	2.4G	AV	2.37928G	2.00	-48.11	-56.74	-47.55	-45.55	-41.20	-4.35
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.00	-77.87	-77.44	-74.64	-72.64	-41.20	-31.44
2412MHz	Pass	2.4835G	2.5235G	AV	2.50286G	2.00	-61.64	-62.54	-59.06	-57.06	-41.20	-15.86
2412MHz	Pass	2.5235G	3G	AV	2.52588G	2.00	-63.34	-63.95	-60.62	-58.62	-41.20	-17.42
2412MHz	Pass	1G	2.36G	PK	2.36G	2.00	-39.29	-51.00	-39.01	-37.01	-21.20	-15.81
2412MHz	Pass	2.36G	2.4G	PK	2.38048G	2.00	-28.96	-39.17	-28.56	-26.56	-21.20	-5.36
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.00	-67.96	-67.37	-64.64	-62.64	-21.20	-41.44
2412MHz	Pass	2.4835G	2.5235G	PK	2.50702G	2.00	-52.00	-51.41	-48.68	-46.68	-21.20	-25.48
2412MHz	Pass	2.5235G	3G	PK	2.53184G	2.00	-52.61	-55.12	-50.68	-48.68	-21.20	-27.48
2462MHz	Pass	1G	2.36G	AV	2.36G	2.28	-58.61	-58.92	-55.75	-53.47	-41.20	-12.27
2462MHz	Pass	2.36G	2.4G	AV	2.36568G	2.28	-57.83	-58.33	-55.06	-52.78	-41.20	-11.58
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.28	-77.75	-77.50	-74.61	-72.33	-41.20	-31.13
2462MHz	Pass	2.4835G	2.5235G	AV	2.5003G	2.28	-47.16	-55.22	-46.53	-44.25	-41.20	-3.05
2462MHz	Pass	2.5235G	3G	AV	2.52529G	2.28	-54.66	-58.12	-53.04	-50.76	-41.20	-9.56
2462MHz	Pass	1G	2.36G	PK	2.35575G	2.28	-50.68	-49.56	-47.07	-44.79	-21.20	-23.59
2462MHz	Pass	2.36G	2.4G	PK	2.36432G	2.28	-47.25	-47.35	-44.29	-42.01	-21.20	-20.81
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.28	-68.31	-66.96	-64.57	-62.29	-21.20	-41.09
2462MHz	Pass	2.4835G	2.5235G	PK	2.4979G	2.28	-30.22	-40.52	-29.83	-27.55	-21.20	-6.35
2462MHz	Pass	2.5235G	3G	PK	2.52886G	2.28	-44.35	-47.63	-42.68	-40.40	-21.20	-19.20

DG = Directional Gain;
 PX=Port X; Psum=P1+.P2+...PX

802.11ax HEW20_Nss2,(MCS0)_2TX
2412MHz

CSE-PK

26/03/2020

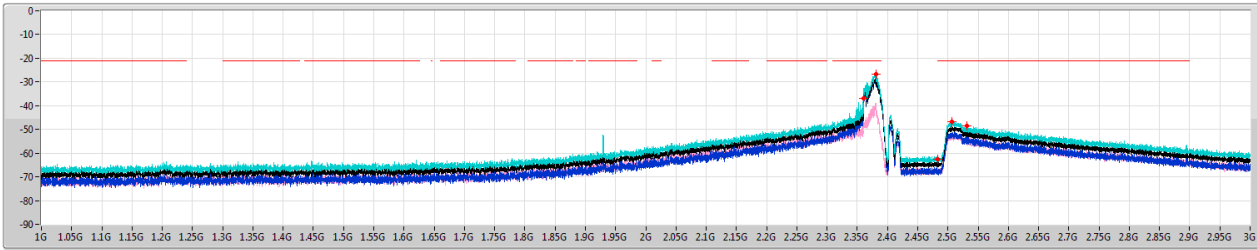



Pk=Port X
Psum=P1+...+PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.36G	-37.01	-21.20	-15.81	2.00	0.00	-39.01	-39.29	-51.00
2.36G	2.4G	1M	PK	2.38048G	-26.56	-21.20	-5.36	2.00	0.00	-28.56	-28.96	-39.17
2.4G	2.4835G	1M	PK	2.4835G	-62.64	-21.20	-41.44	2.00	0.00	-64.64	-67.96	-67.37
2.4835G	2.5235G	1M	PK	2.50702G	-46.68	-21.20	-25.48	2.00	0.00	-48.68	-52.00	-51.41
2.5235G	3G	1M	PK	2.53184G	-48.68	-21.20	-27.48	2.00	0.00	-50.68	-52.61	-55.12

802.11ax HEW20_Nss2,(MCS0)_2TX
2412MHz

CSE-AV

26/03/2020

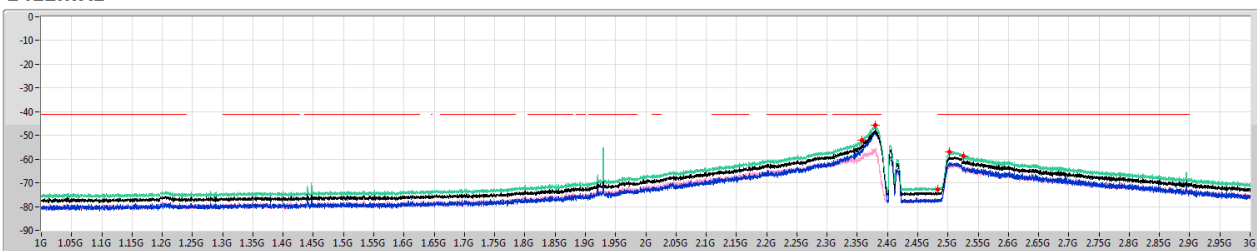



Pk=Port X
Psum=P1+...+PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.35813G	-51.90	-41.20	-10.70	2.00	0.00	-53.90	-55.58	-58.83
2.36G	2.4G	1M	AV	2.37928G	-45.55	-41.20	-4.35	2.00	0.00	-47.55	-48.11	-56.74
2.4G	2.4835G	1M	AV	2.4835G	-72.64	-41.20	-31.44	2.00	0.00	-74.64	-77.87	-77.44
2.4835G	2.5235G	1M	AV	2.50286G	-57.06	-41.20	-15.86	2.00	0.00	-59.06	-61.64	-62.54
2.5235G	3G	1M	AV	2.52588G	-58.62	-41.20	-17.42	2.00	0.00	-60.62	-63.34	-63.95

802.11ax HEW20_Nss2,(MCS0)_2TX
2462MHz

CSE-PK

26/03/2020

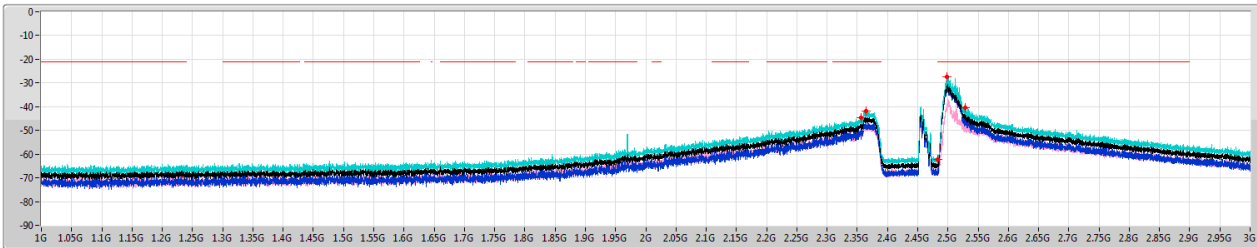



PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	PK	2.35575G	-44.79	-21.20	-23.59	2.28	0.00	-47.07	-50.68	-49.56
2.36G	2.4G	1M	PK	2.36432G	-42.01	-21.20	-20.81	2.28	0.00	-44.29	-47.25	-47.35
2.4G	2.4835G	1M	PK	2.4835G	-62.29	-21.20	-41.09	2.28	0.00	-64.57	-68.31	-66.96
2.4835G	2.5235G	1M	PK	2.4979G	-27.55	-21.20	-6.35	2.28	0.00	-29.83	-30.22	-40.52
2.5235G	3G	1M	PK	2.52886G	-40.40	-21.20	-19.20	2.28	0.00	-42.68	-44.35	-47.63

802.11ax HEW20_Nss2,(MCS0)_2TX
2462MHz

CSE-AV

26/03/2020

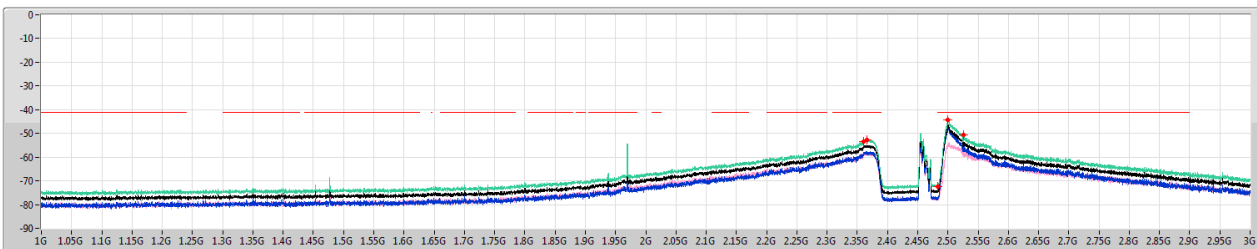

PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	2.36G	1M	AV	2.36G	-53.47	-41.20	-12.27	2.28	0.00	-55.75	-58.61	-58.92
2.36G	2.4G	1M	AV	2.36568G	-52.78	-41.20	-11.58	2.28	0.00	-55.06	-57.83	-58.33
2.4G	2.4835G	1M	AV	2.4835G	-72.33	-41.20	-31.13	2.28	0.00	-74.61	-77.75	-77.50
2.4835G	2.5235G	1M	AV	2.5003G	-44.25	-41.20	-3.05	2.28	0.00	-46.53	-47.16	-55.22
2.5235G	3G	1M	AV	2.52529G	-50.76	-41.20	-9.56	2.28	0.00	-53.04	-54.66	-58.12



<2T1S>

For Conducted Harmonic (3~25GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	3G	7.5G	AV	7.31044G	5.19	-54.56	-56.73	-52.5	-47.31	-41.2	-6.11
802.11g_Nss1,(6Mbps)_2TX	Pass	3G	7.5G	AV	3.65531G	5.19	-52.56	-69.97	-52.48	-47.29	-41.2	-6.09
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	3G	7.5G	AV	3.65531G	5.19	-52.76	-69.04	-52.66	-47.47	-41.2	-6.27

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



Result



Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	3.61763G	4.73	-54.46	-72.76	-54.4	-49.67	-41.2	-8.47
2412MHz	Pass	3G	7.5G	AV	4.82419G	4.73	-66.31	-61.2	-60.03	-55.30	-41.2	-14.10
2412MHz	Pass	7.5G	25G	AV	19.51594G	4.73	-80.15	-79.62	-76.87	-72.14	-41.2	-30.94
2412MHz	Pass	3G	7.5G	PK	3.61763G	4.73	-53.94	-65.45	-53.64	-48.91	-21.2	-27.71
2412MHz	Pass	3G	7.5G	PK	4.82419G	4.73	-64.51	-59.79	-58.53	-53.80	-21.2	-32.60
2412MHz	Pass	7.5G	25G	PK	19.89438G	4.73	-69.67	-71.23	-67.37	-62.64	-21.2	-41.44
2437MHz	Pass	3G	7.5G	AV	4.87369G	5.19	-58.89	-60.55	-56.63	-51.44	-41.2	-10.24
2437MHz	Pass	3G	7.5G	AV	7.31044G	5.19	-54.56	-56.73	-52.5	-47.31	-41.2	-6.11
2437MHz	Pass	7.5G	25G	AV	12.18344G	5.19	-61.5	-70.49	-60.98	-55.79	-41.2	-14.59
2437MHz	Pass	3G	7.5G	PK	4.87425G	5.19	-56.34	-57.55	-53.89	-48.70	-21.2	-27.50
2437MHz	Pass	3G	7.5G	PK	7.30988G	5.19	-51.92	-53.25	-49.52	-44.33	-21.2	-23.13
2437MHz	Pass	7.5G	25G	PK	19.87906G	5.19	-57.61	-57.55	-54.57	-49.38	-21.2	-28.18
2462MHz	Pass	3G	7.5G	AV	4.92375G	5.29	-73.96	-69.67	-68.3	-63.01	-41.2	-21.81
2462MHz	Pass	7.5G	25G	AV	19.51594G	5.29	-79.68	-79.94	-76.8	-71.51	-41.2	-30.31
2462MHz	Pass	3G	7.5G	PK	4.92431G	5.29	-69.88	-67.38	-65.44	-60.15	-21.2	-38.95
2462MHz	Pass	7.5G	25G	PK	19.50719G	5.29	-71.41	-70.88	-68.13	-62.84	-21.2	-41.64
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	3.61763G	4.73	-54.35	-74.69	-54.31	-49.58	-41.2	-8.38
2412MHz	Pass	3G	7.5G	AV	4.82363G	4.73	-80.38	-76.15	-74.76	-70.03	-41.2	-28.83
2412MHz	Pass	7.5G	25G	AV	19.51813G	4.73	-79.85	-79.94	-76.88	-72.15	-41.2	-30.95
2412MHz	Pass	3G	7.5G	PK	3.61763G	4.73	-53.78	-69.39	-53.66	-48.93	-21.2	-27.73
2412MHz	Pass	3G	7.5G	PK	4.82981G	4.73	-72.78	-65.51	-64.76	-60.03	-21.2	-38.83
2412MHz	Pass	7.5G	25G	PK	19.4875G	4.73	-70.22	-71.01	-67.59	-62.86	-21.2	-41.66
2437MHz	Pass	3G	7.5G	AV	3.65531G	5.19	-52.56	-69.97	-52.48	-47.29	-41.2	-6.09
2437MHz	Pass	3G	7.5G	AV	4.87369G	5.19	-73.67	-69.22	-67.89	-62.70	-41.2	-21.50
2437MHz	Pass	7.5G	25G	AV	19.49844G	5.19	-79.96	-80.02	-76.98	-71.79	-41.2	-30.59
2437MHz	Pass	3G	7.5G	PK	3.65531G	5.19	-52.19	-65.39	-51.99	-46.80	-21.2	-25.60
2437MHz	Pass	3G	7.5G	PK	4.86863G	5.19	-66.11	-58.12	-57.48	-52.29	-21.2	-31.09
2437MHz	Pass	7.5G	25G	PK	19.86375G	5.19	-70.86	-71.44	-68.13	-62.94	-21.2	-41.74
2462MHz	Pass	3G	7.5G	AV	4.91813G	5.29	-83.75	-79.18	-77.88	-72.59	-41.2	-31.39
2462MHz	Pass	7.5G	25G	AV	19.48313G	5.29	-80.57	-79.41	-76.94	-71.65	-41.2	-30.45
2462MHz	Pass	3G	7.5G	PK	4.92094G	5.29	-74.39	-67.88	-67	-61.71	-21.2	-40.51
2462MHz	Pass	7.5G	25G	PK	19.52906G	5.29	-70.57	-69.97	-67.25	-61.96	-21.2	-40.76
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	3.61763G	4.73	-54.26	-73.85	-54.21	-49.48	-41.2	-8.28
2412MHz	Pass	3G	7.5G	AV	4.82419G	4.73	-80.02	-76.67	-75.02	-70.29	-41.2	-29.09
2412MHz	Pass	7.5G	25G	AV	19.49625G	4.73	-79.88	-79.79	-76.82	-72.09	-41.2	-30.89
2412MHz	Pass	3G	7.5G	PK	3.61763G	4.73	-53.93	-68.61	-53.78	-49.05	-21.2	-27.85
2412MHz	Pass	3G	7.5G	PK	4.83094G	4.73	-74.11	-65.42	-64.87	-60.14	-21.2	-38.94
2412MHz	Pass	7.5G	25G	PK	19.84188G	4.73	-70.85	-70.86	-67.84	-63.11	-21.2	-41.91
2437MHz	Pass	3G	7.5G	AV	3.65531G	5.19	-52.76	-69.04	-52.66	-47.47	-41.2	-6.27
2437MHz	Pass	3G	7.5G	AV	4.872G	5.19	-74.25	-69.67	-68.37	-63.18	-41.2	-21.98
2437MHz	Pass	7.5G	25G	AV	19.49625G	5.19	-80	-79.69	-76.83	-71.64	-41.2	-30.44
2437MHz	Pass	3G	7.5G	PK	3.65531G	5.19	-52.44	-64.41	-52.17	-46.98	-21.2	-25.78
2437MHz	Pass	3G	7.5G	PK	4.86581G	5.19	-65.55	-58.49	-57.71	-52.52	-21.2	-31.32
2437MHz	Pass	7.5G	25G	PK	19.49406G	5.19	-69.93	-72.76	-68.11	-62.92	-21.2	-41.72
2462MHz	Pass	3G	7.5G	AV	4.91644G	5.29	-83.37	-82.48	-79.89	-74.60	-41.2	-33.40
2462MHz	Pass	7.5G	25G	AV	19.50281G	5.29	-80.55	-79.21	-76.82	-71.53	-41.2	-30.33
2462MHz	Pass	3G	7.5G	PK	4.91194G	5.29	-72.4	-73.06	-69.71	-64.42	-21.2	-43.22
2462MHz	Pass	3G	7.5G	PK	4.92206G	5.29	-75.91	-71.92	-70.46	-65.17	-21.2	-43.97
2462MHz	Pass	7.5G	25G	PK	19.50719G	5.29	-69.95	-71.91	-67.81	-62.52	-21.2	-41.32

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

802.11b_Nss1,(1Mbps)_2TX
2412MHz

CSE-PK

06/03/2020

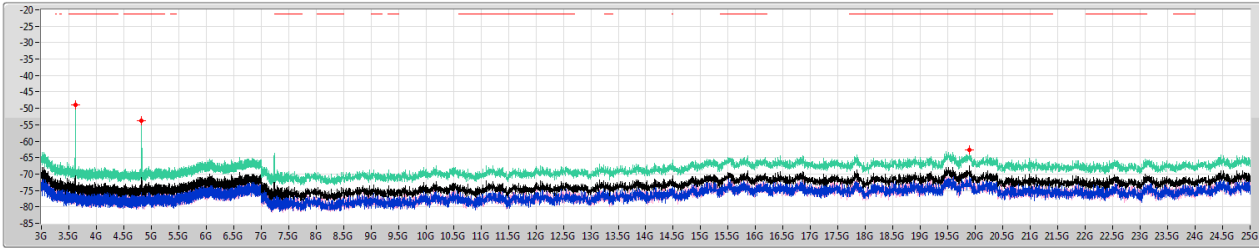



PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	3.61763G	-48.91	-21.20	-27.71	4.73	0.00	-53.64	-53.94	-65.45
3G	7.5G	1M	PK	4.82419G	-53.80	-21.20	-32.60	4.73	0.00	-58.53	-64.51	-59.79
7.5G	25G	1M	PK	19.89438G	-62.64	-21.20	-41.44	4.73	0.00	-67.37	-69.67	-71.23

802.11b_Nss1,(1Mbps)_2TX
2412MHz

CSE-AV

06/03/2020

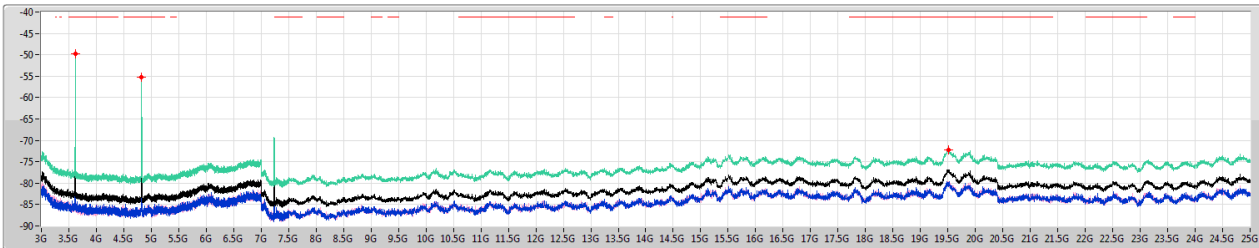


PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.61763G	-49.67	-41.20	-8.47	4.73	0.00	-54.40	-54.46	-72.76
3G	7.5G	1M	AV	4.82419G	-55.30	-41.20	-14.10	4.73	0.00	-60.03	-66.31	-61.20
7.5G	25G	1M	AV	19.51594G	-72.14	-41.20	-30.94	4.73	0.00	-76.87	-80.15	-79.62

802.11b_Nss1,(1Mbps)_2TX
2437MHz

CSE [PK]

26/06/2022

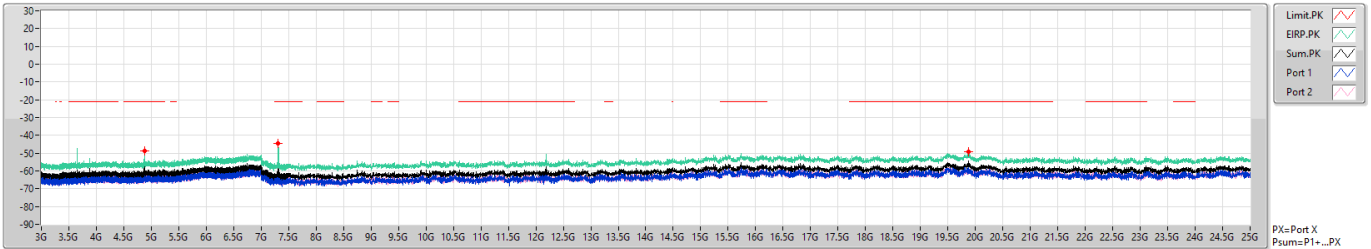


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.87425G	-48.70	-21.20	-27.50	5.19	0.00	-53.89	-56.34	-57.55
3G	7.5G	1M	PK	7.30988G	-44.33	-21.20	-23.13	5.19	0.00	-49.52	-51.92	-53.25
7.5G	25G	1M	PK	19.87906G	-49.38	-21.20	-28.18	5.19	0.00	-54.57	-57.61	-57.55

802.11b_Nss1,(1Mbps)_2TX
2437MHz

CSE [AV]

26/06/2022

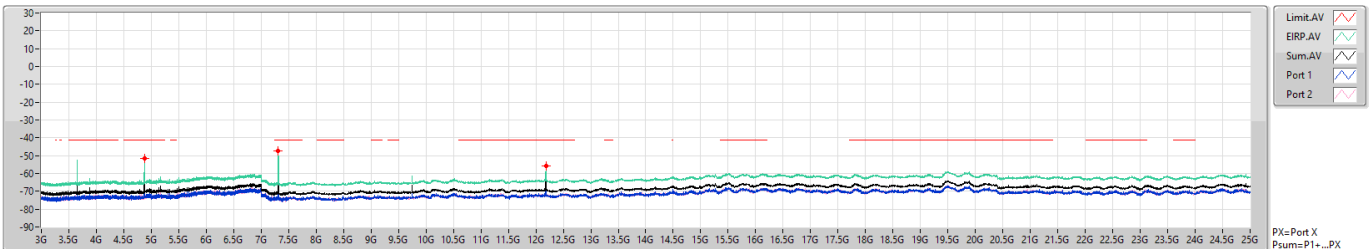



F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.87399G	-51.44	-41.20	-10.24	5.19	0.00	-56.63	-58.89	-60.55
3G	7.5G	1M	AV	7.31044G	-47.31	-41.20	-6.11	5.19	0.00	-52.50	-54.56	-56.73
7.5G	25G	1M	AV	12.18344G	-55.79	-41.20	-14.59	5.19	0.00	-60.98	-61.50	-70.49

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-PK

06.03.2020

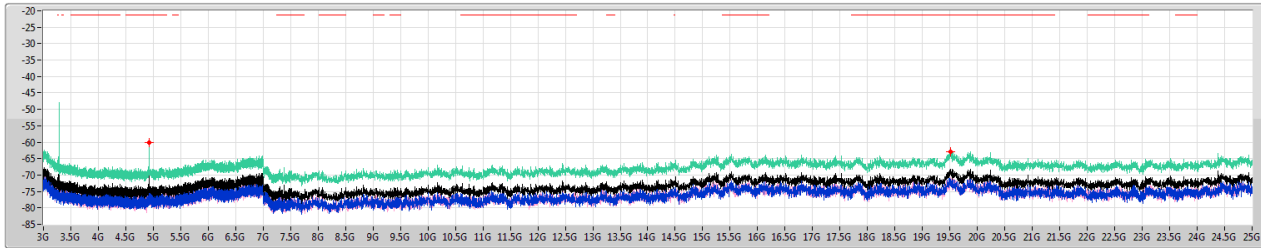

PX=Port X
Psum=P1+...PX



F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.92431G	-60.15	-21.20	-38.95	5.29	0.00	-65.44	-69.88	-67.38
7.5G	25G	1M	PK	19.50719G	-62.84	-21.20	-41.64	5.29	0.00	-68.13	-71.41	-70.88

802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE-AV

06.03.2020

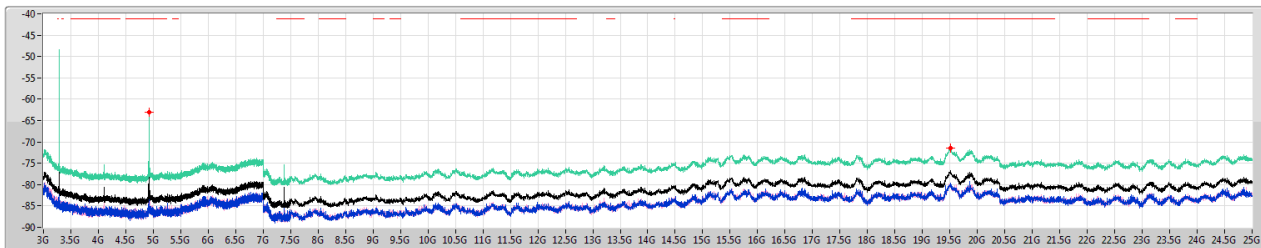

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.92375G	-63.01	-41.20	-21.81	5.29	0.00	-68.30	-73.96	-69.67
7.5G	25G	1M	AV	19.51594G	-71.51	-41.20	-30.31	5.29	0.00	-76.80	-79.68	-79.94

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-PK

06/03/2020

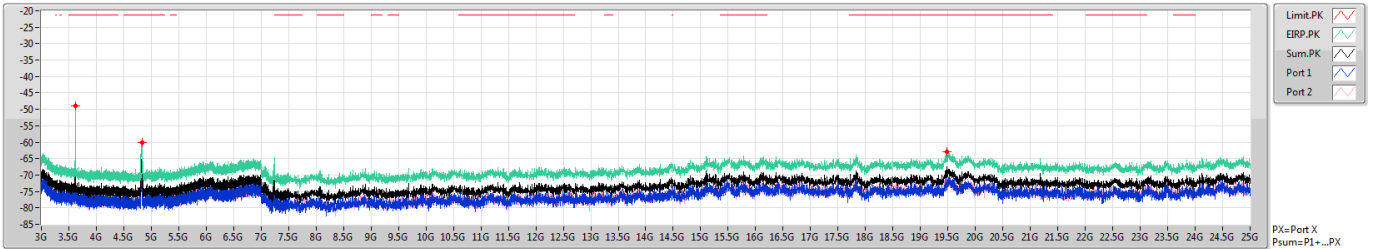


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	3.61763G	-48.93	-21.20	-27.73	4.73	0.00	-53.66	-53.78	-69.39
3G	7.5G	1M	PK	4.82981G	-60.03	-21.20	-38.83	4.73	0.00	-64.76	-72.78	-65.51
7.5G	25G	1M	PK	19.4875G	-62.86	-21.20	-41.66	4.73	0.00	-67.59	-70.22	-71.01

802.11g_Nss1,(6Mbps)_2TX

2412MHz

CSE-AV

06/03/2020

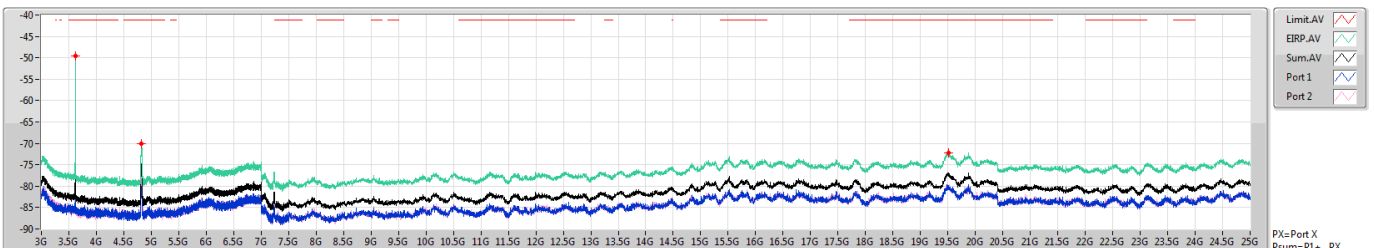


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.61763G	-49.58	-41.20	-8.38	4.73	0.00	-54.31	-54.35	-74.69
3G	7.5G	1M	AV	4.82963G	-70.03	-41.20	-28.83	4.73	0.00	-74.76	-80.38	-76.15
7.5G	25G	1M	AV	19.51813G	-72.15	-41.20	-30.95	4.73	0.00	-76.88	-79.85	-79.94

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-PK

06/03/2020

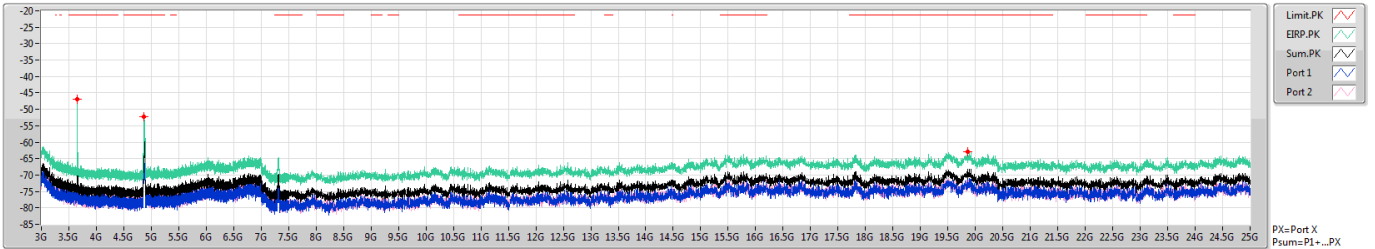


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	3.65531G	-46.80	-21.20	-25.60	5.19	0.00	-51.99	-52.19	-65.39
3G	7.5G	1M	PK	4.86863G	-52.29	-21.20	-31.09	5.19	0.00	-57.48	-66.11	-58.12
7.5G	25G	1M	PK	19.86375G	-62.94	-21.20	-41.74	5.19	0.00	-68.13	-70.86	-71.44

802.11g_Nss1,(6Mbps)_2TX

2437MHz

CSE-AV

06/03/2020

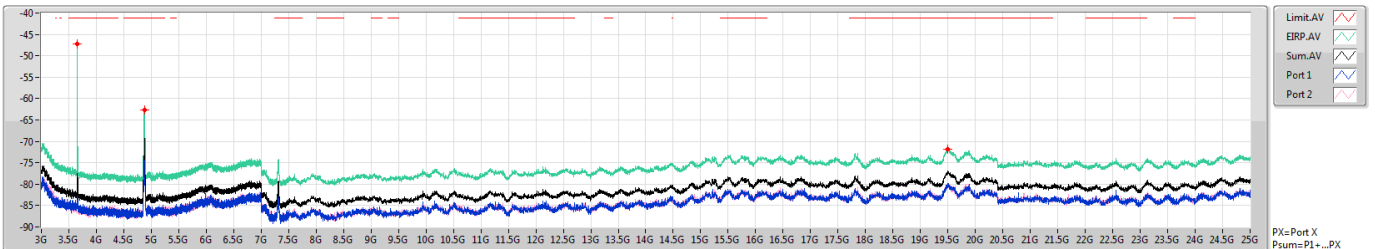



F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.65531G	-47.29	-41.20	-6.09	5.19	0.00	-52.48	-52.56	-69.97
3G	7.5G	1M	AV	4.87369G	-62.70	-41.20	-21.50	5.19	0.00	-67.89	-73.67	-69.22
7.5G	25G	1M	AV	19.49844G	-71.79	-41.20	-30.59	5.19	0.00	-76.98	-79.96	-80.02

802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-PK

06.03.2020

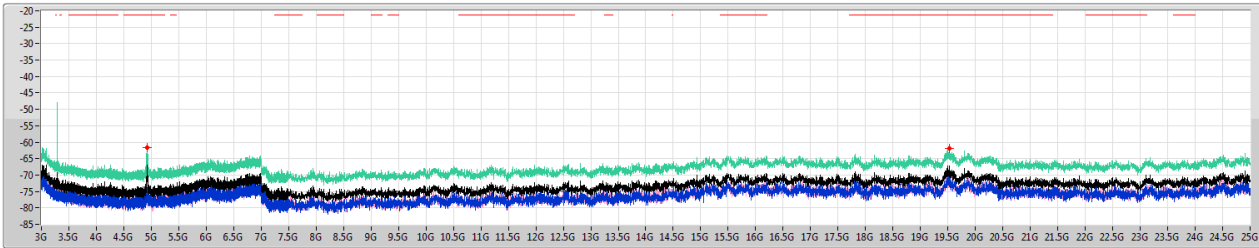

PX=Port X
Psum=P1+...PX



F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.92094G	-61.71	-21.20	-40.51	5.29	0.00	-67.00	-74.39	-67.88
7.5G	25G	1M	PK	19.52906G	-61.96	-21.20	-40.76	5.29	0.00	-67.25	-70.57	-69.97

802.11g_Nss1,(6Mbps)_2TX

2462MHz

CSE-AV

06.03.2020

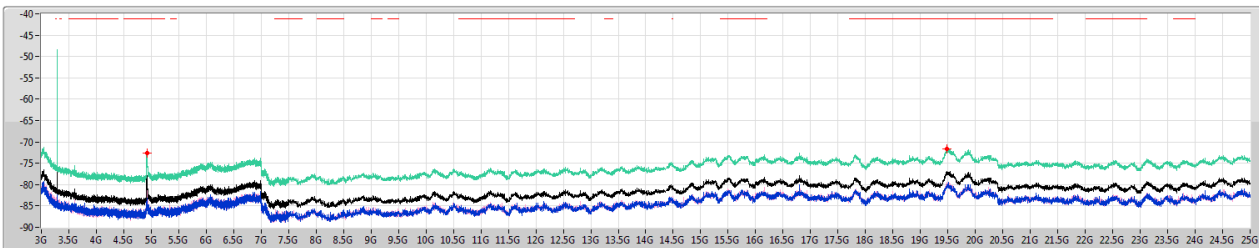

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.91813G	-72.59	-41.20	-31.39	5.29	0.00	-77.88	-83.75	-79.18
7.5G	25G	1M	AV	19.48313G	-71.65	-41.20	-30.45	5.29	0.00	-76.94	-80.57	-79.41

802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz

CSE-PK

06/03/2020

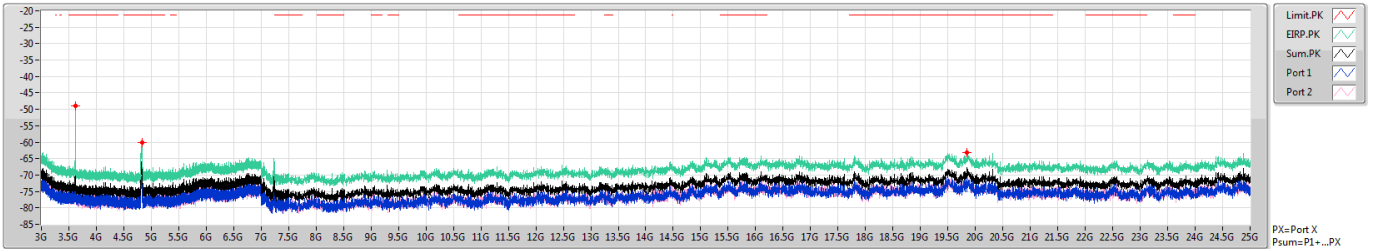


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	3.61763G	-49.05	-21.20	-27.85	4.73	0.00	-53.78	-53.93	-68.61
3G	7.5G	1M	PK	4.83094G	-60.14	-21.20	-38.94	4.73	0.00	-64.87	-74.11	-65.42
7.5G	25G	1M	PK	19.84188G	-63.11	-21.20	-41.91	4.73	0.00	-67.84	-70.85	-70.86

802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz

CSE-AV

06/03/2020

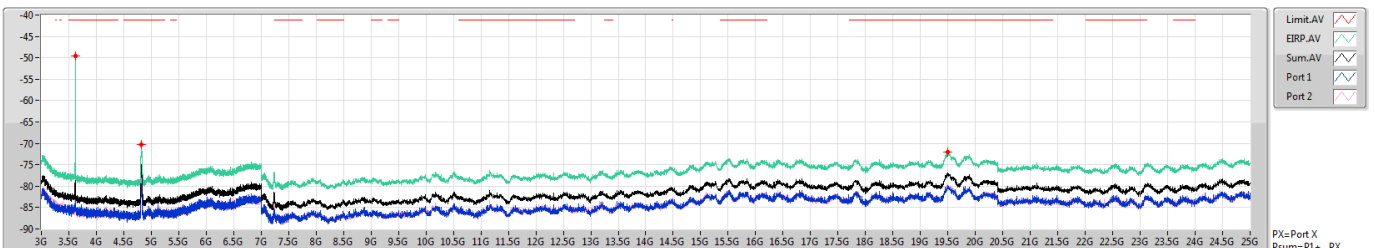


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.61763G	-49.48	-41.20	-8.28	4.73	0.00	-54.21	-54.26	-73.85
3G	7.5G	1M	AV	4.82419G	-70.29	-41.20	-29.09	4.73	0.00	-75.02	-80.02	-76.67
7.5G	25G	1M	AV	19.49625G	-72.09	-41.20	-30.89	4.73	0.00	-76.82	-79.88	-79.79

802.11ax HEW20_Nss1,(MCS0)_2TX
2437MHz

CSE-PK

06/03/2020

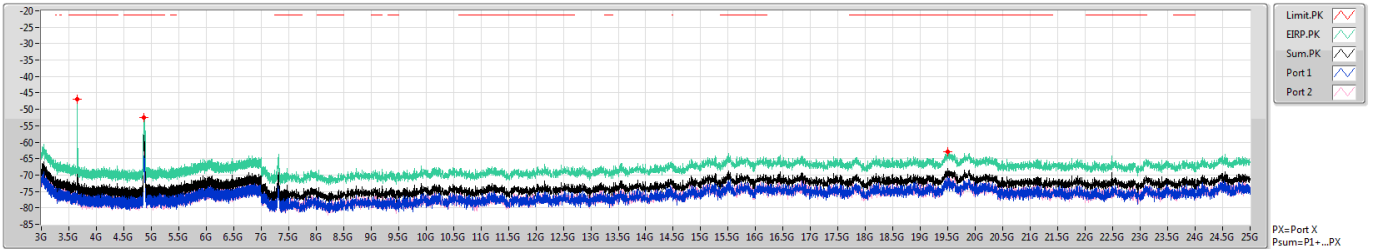


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	3.65531G	-46.98	-21.20	-25.78	5.19	0.00	-52.17	-52.44	-64.41
3G	7.5G	1M	PK	4.86581G	-52.52	-21.20	-31.32	5.19	0.00	-57.71	-65.55	-58.49
7.5G	25G	1M	PK	19.49406G	-62.92	-21.20	-41.72	5.19	0.00	-68.11	-69.93	-72.76

802.11ax HEW20_Nss1,(MCS0)_2TX
2437MHz

CSE-AV

06/03/2020

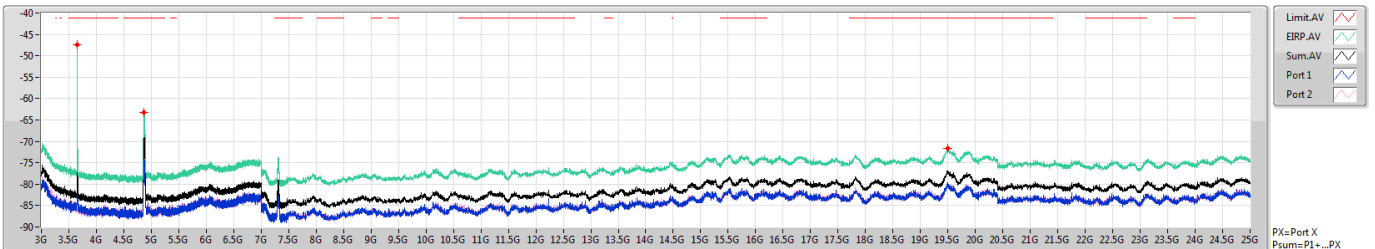


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.65531G	-47.47	-41.20	-6.27	5.19	0.00	-52.66	-52.76	-69.04
3G	7.5G	1M	AV	4.872G	-63.18	-41.20	-21.98	5.19	0.00	-68.37	-74.25	-69.67
7.5G	25G	1M	AV	19.49625G	-71.64	-41.20	-30.44	5.19	0.00	-76.83	-80.00	-79.69

802.11ax HEW20_Nss1,(MCS0)_2TX
2462MHz

CSE-PK

06/03/2020

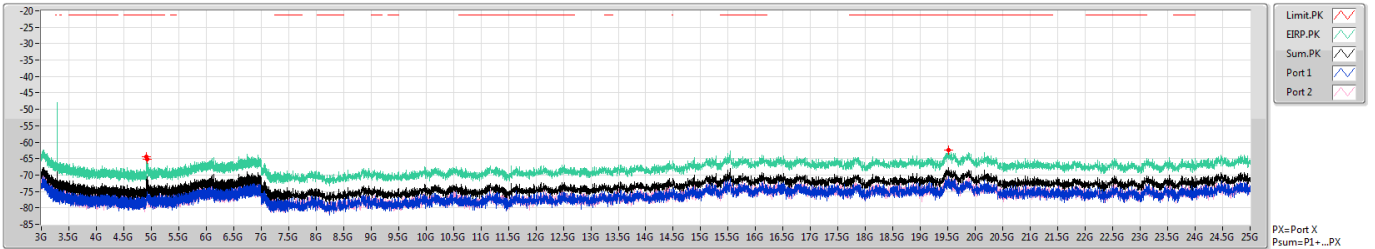


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.91194G	-64.42	-21.20	-43.22	5.29	0.00	-69.71	-72.40	-73.06
3G	7.5G	1M	PK	4.92206G	-65.17	-21.20	-43.97	5.29	0.00	-70.46	-75.91	-71.92
7.5G	25G	1M	PK	19.50719G	-62.52	-21.20	-41.32	5.29	0.00	-67.81	-69.95	-71.91

802.11ax HEW20_Nss1,(MCS0)_2TX
2462MHz

CSE-AV

06/03/2020

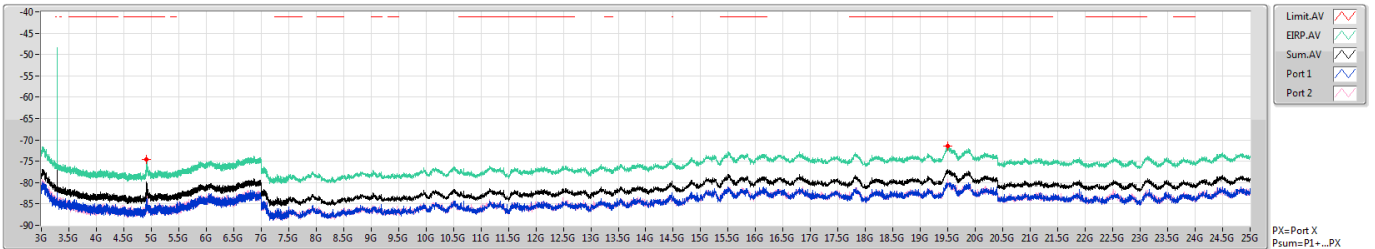

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.91644G	-74.60	-41.20	-33.40	5.29	0.00	-79.89	-83.37	-82.48
7.5G	25G	1M	AV	19.50281G	-71.53	-41.20	-30.33	5.29	0.00	-76.82	-80.55	-79.21



<2T2S>

For Conducted Harmonic (3~25GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	3G	7.5G	AV	3.61763G	2.00	-54.62	-75.46	-54.58	-52.58	-41.20	-11.38

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX



Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_Nss2(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3G	7.5G	AV	3.61763G	2.00	-54.62	-75.46	-54.58	-52.58	-41.20	-11.38
2412MHz	Pass	3G	7.5G	AV	4.82363G	2.00	-80.20	-75.72	-74.40	-72.40	-41.20	-31.20
2412MHz	Pass	7.5G	25G	AV	20.36906G	2.00	-73.10	-73.32	-70.20	-68.20	-41.20	-27.00
2412MHz	Pass	3G	7.5G	PK	3.61763G	2.00	-54.17	-70.10	-54.06	-52.06	-21.20	-30.86
2412MHz	Pass	3G	7.5G	PK	4.82644G	2.00	-72.76	-65.04	-64.36	-62.36	-21.20	-41.16
2412MHz	Pass	7.5G	25G	PK	20.37125G	2.00	-65.54	-64.21	-61.81	-59.81	-21.20	-38.61
2462MHz	Pass	3G	7.5G	AV	4.93106G	2.28	-83.86	-81.64	-79.60	-77.32	-41.20	-36.12
2462MHz	Pass	3G	7.5G	AV	7.37569G	2.28	-81.65	-80.92	-78.26	-75.98	-41.20	-34.78
2462MHz	Pass	7.5G	25G	AV	20.37781G	2.28	-72.96	-73.41	-70.17	-67.89	-41.20	-26.69
2462MHz	Pass	3G	7.5G	PK	4.91306G	2.28	-74.70	-68.37	-67.46	-65.18	-21.20	-43.98
2462MHz	Pass	3G	7.5G	PK	4.93163G	2.28	-75.71	-68.23	-67.52	-65.24	-21.20	-44.04
2462MHz	Pass	7.5G	25G	PK	20.35375G	2.28	-62.93	-66.39	-61.31	-59.03	-21.20	-37.83


DG = Directional Gain;
 PX=Port X; Psum=P1+.P2+...PX

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-PK

26/03/2020

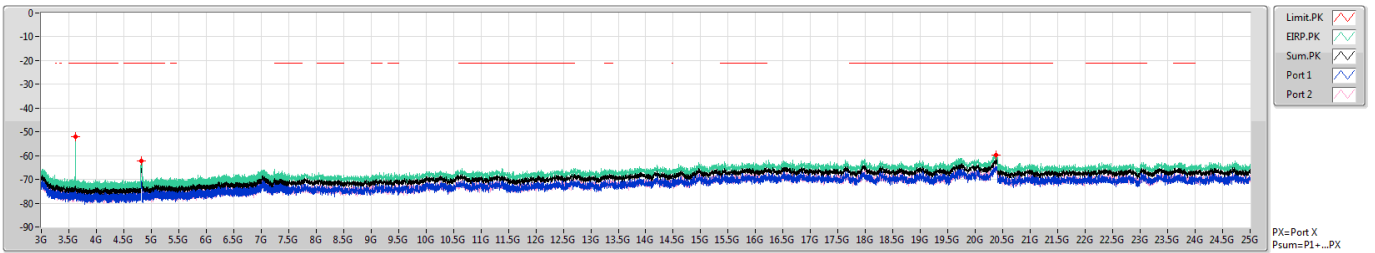


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	3.61763G	-52.06	-21.20	-30.86	2.00	0.00	-54.06	-54.17	-70.10
3G	7.5G	1M	PK	4.82644G	-62.36	-21.20	-41.16	2.00	0.00	-64.36	-72.76	-65.04
7.5G	25G	1M	PK	20.37125G	-59.81	-21.20	-38.61	2.00	0.00	-61.81	-65.54	-64.21

802.11ax HEW20_Nss2,(MCS0)_2TX

2412MHz

CSE-AV

26/03/2020

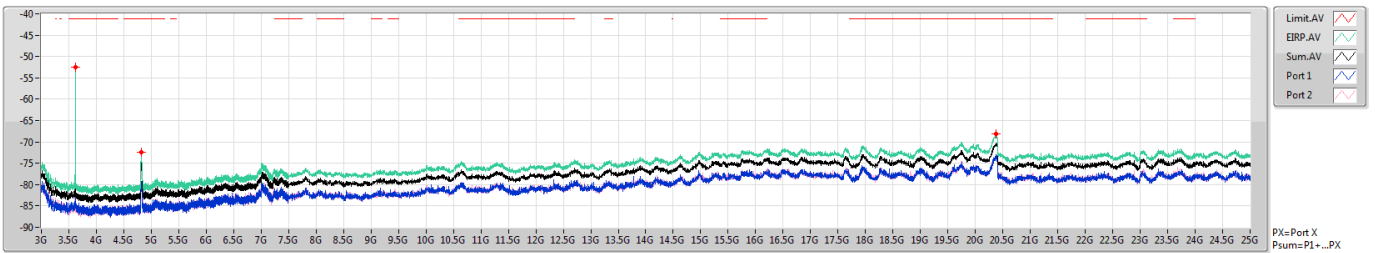


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	3.61763G	-52.58	-41.20	-11.38	2.00	0.00	-54.58	-54.62	-75.46
3G	7.5G	1M	AV	4.82363G	-72.40	-41.20	-31.20	2.00	0.00	-74.40	-80.20	-75.72
7.5G	25G	1M	AV	20.36906G	-68.20	-41.20	-27.00	2.00	0.00	-70.20	-73.10	-73.32

802.11ax HEW20_Nss2,(MCS0)_2TX

2462MHz

CSE-PK

26/03/2020

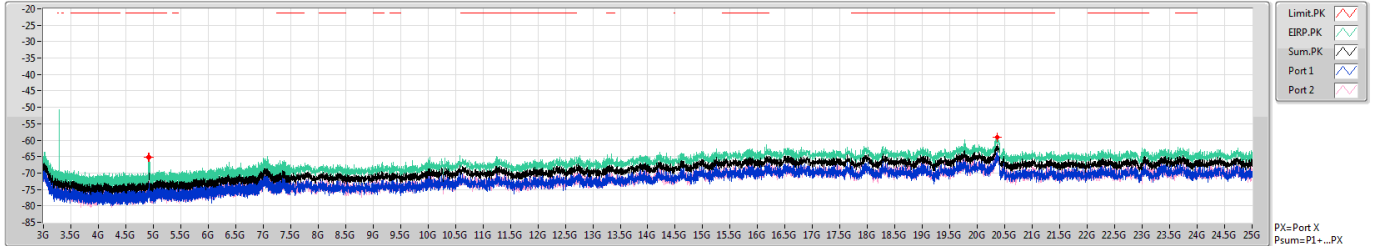


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	PK	4.91306G	-65.18	-21.20	-43.98	2.28	0.00	-67.46	-74.70	-68.37
3G	7.5G	1M	PK	4.93163G	-65.24	-21.20	-44.04	2.28	0.00	-67.52	-75.71	-68.23
7.5G	25G	1M	PK	20.33795G	-59.03	-21.20	-37.83	2.28	0.00	-61.31	-62.93	-66.39

802.11ax HEW20_Nss2,(MCS0)_2TX

2462MHz

CSE-AV

26/03/2020

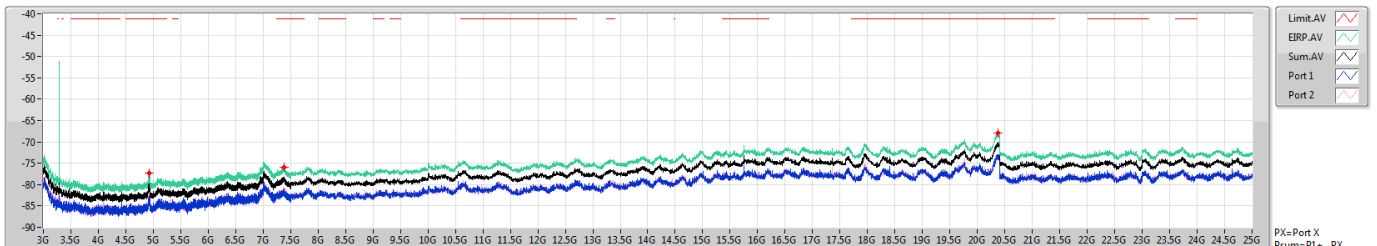

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
3G	7.5G	1M	AV	4.93106G	-77.32	-41.20	-36.12	2.28	0.00	-79.60	-83.86	-81.64
3G	7.5G	1M	AV	7.37569G	-75.98	-41.20	-34.78	2.28	0.00	-78.26	-81.65	-80.92
7.5G	25G	1M	AV	20.37781G	-67.89	-41.20	-26.69	2.28	0.00	-70.17	-72.96	-73.41



<2T1S>

For Conducted Bandedge:

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.4835G	2.5235G	AV	2.48514G	5.29	-50.76	-50.41	-47.57	-42.28	-41.2	-1.08
802.11g_Nss1,(6Mbps)_2TX	Pass	2.4835G	2.5235G	PK	2.48362G	5.29	-28.96	-30.84	-26.79	-21.50	-21.2	-0.30
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	2.36G	2.4G	PK	2.38992G	4.73	-28.87	-30.21	-26.48	-21.75	-21.2	-0.55

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX




Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dB)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.35928G	4.73	-56.47	-56.91	-53.67	-48.94	-41.2	-7.74
2412MHz	Pass	2.36G	2.4G	AV	2.38724G	4.73	-52.71	-52.71	-49.7	-44.97	-41.2	-3.77
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	4.73	-58.36	-59.06	-55.69	-50.96	-41.2	-9.76
2412MHz	Pass	2.4835G	2.5235G	AV	2.49562G	4.73	-57.1	-59.32	-55.06	-50.33	-41.2	-9.13
2412MHz	Pass	2.5235G	2.6G	AV	2.53008G	4.73	-60.21	-61.88	-57.95	-53.22	-41.2	-12.02
2412MHz	Pass	2.3G	2.36G	PK	2.35952G	4.73	-45.3	-47.31	-43.18	-38.45	-21.2	-17.25
2412MHz	Pass	2.36G	2.4G	PK	2.38756G	4.73	-42.93	-43.71	-40.29	-35.56	-21.2	-14.36
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	4.73	-48.4	-48.75	-45.56	-40.83	-21.2	-19.63
2412MHz	Pass	2.4835G	2.5235G	PK	2.4855G	4.73	-47.48	-48.27	-44.85	-40.12	-21.2	-18.92
2412MHz	Pass	2.5235G	2.6G	PK	2.54056G	4.73	-48.96	-51.38	-46.99	-42.26	-21.2	-21.06
2437MHz	Pass	2.3G	2.36G	AV	2.35916G	5.19	-57.69	-57.42	-54.54	-49.35	-41.2	-8.15
2437MHz	Pass	2.36G	2.4G	AV	2.38872G	5.19	-55.88	-55.19	-52.51	-47.32	-41.2	-6.12
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.19	-57.05	-56.69	-53.86	-48.67	-41.2	-7.47
2437MHz	Pass	2.4835G	2.5235G	AV	2.48574G	5.19	-57.28	-56.16	-53.67	-48.48	-41.2	-7.28
2437MHz	Pass	2.5235G	2.6G	AV	2.53834G	5.19	-59.89	-60.95	-57.38	-52.19	-41.2	-10.99
2437MHz	Pass	2.3G	2.36G	PK	2.35472G	5.19	-48.32	-46.53	-44.32	-39.13	-21.2	-17.93
2437MHz	Pass	2.36G	2.4G	PK	2.38916G	5.19	-46.25	-44.44	-42.24	-37.05	-21.2	-15.85
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.19	-46.99	-48.49	-44.67	-39.48	-21.2	-18.28
2437MHz	Pass	2.4835G	2.5235G	PK	2.48506G	5.19	-47.36	-45.9	-43.56	-38.37	-21.2	-17.17
2437MHz	Pass	2.5235G	2.6G	PK	2.5258G	5.19	-49.95	-49.02	-46.45	-41.26	-21.2	-20.06
2462MHz	Pass	2.3G	2.36G	AV	2.3597G	5.29	-59.49	-57.27	-55.23	-49.94	-41.2	-8.74
2462MHz	Pass	2.36G	2.4G	AV	2.36304G	5.29	-56.85	-56.47	-53.65	-48.36	-41.2	-7.16
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.29	-52.41	-52.56	-49.47	-44.18	-41.2	-2.98
2462MHz	Pass	2.4835G	2.5235G	AV	2.48514G	5.29	-50.76	-50.41	-47.57	-42.28	-41.2	-1.08
2462MHz	Pass	2.5235G	2.6G	AV	2.52381G	5.29	-58.64	-57.01	-54.74	-49.45	-41.2	-8.25
2462MHz	Pass	2.3G	2.36G	PK	2.35982G	5.29	-47.62	-49.34	-45.39	-40.10	-21.2	-18.90
2462MHz	Pass	2.36G	2.4G	PK	2.3832G	5.29	-45.42	-48.54	-43.7	-38.41	-21.2	-17.21
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.29	-44.1	-43.29	-40.67	-35.38	-21.2	-14.18
2462MHz	Pass	2.4835G	2.5235G	PK	2.4853G	5.29	-41.42	-41.62	-38.51	-33.22	-21.2	-12.02
2462MHz	Pass	2.5235G	2.6G	PK	2.52373G	5.29	-46.68	-45.97	-43.3	-38.01	-21.2	-16.81
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.35874G	4.73	-54.33	-57.65	-52.67	-47.94	-41.2	-6.74
2412MHz	Pass	2.36G	2.4G	AV	2.38988G	4.73	-49.68	-52.22	-47.76	-43.03	-41.2	-1.83
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	4.73	-58.13	-58.16	-55.13	-50.40	-41.2	-9.20
2412MHz	Pass	2.4835G	2.5235G	AV	2.48454G	4.73	-58.07	-58.65	-55.34	-50.61	-41.2	-9.41
2412MHz	Pass	2.5235G	2.6G	AV	2.52526G	4.73	-60.58	-62.16	-58.29	-53.56	-41.2	-12.36
2412MHz	Pass	2.3G	2.36G	PK	2.3582G	4.73	-44.24	-46.65	-42.27	-37.54	-21.2	-16.34
2412MHz	Pass	2.36G	2.4G	PK	2.38956G	4.73	-27.85	-33.65	-26.84	-22.11	-21.2	-0.91
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	4.73	-47.74	-48.72	-45.19	-40.46	-21.2	-19.26
2412MHz	Pass	2.4835G	2.5235G	PK	2.48598G	4.73	-47.11	-49.54	-45.15	-40.42	-21.2	-19.22
2412MHz	Pass	2.5235G	2.6G	PK	2.52495G	4.73	-50.73	-49.81	-47.24	-42.51	-21.2	-21.31
2437MHz	Pass	2.3G	2.36G	AV	2.35844G	5.19	-57.42	-56.92	-54.15	-48.96	-41.2	-7.76
2437MHz	Pass	2.36G	2.4G	AV	2.3894G	5.19	-52.59	-52.89	-49.73	-44.54	-41.2	-3.34
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.19	-53.5	-53.97	-50.72	-45.53	-41.2	-4.33
2437MHz	Pass	2.4835G	2.5235G	AV	2.4845G	5.19	-52.91	-53.01	-49.95	-44.76	-41.2	-3.56
2437MHz	Pass	2.5235G	2.6G	AV	2.52396G	5.19	-58.19	-58.73	-55.44	-50.25	-41.2	-9.05
2437MHz	Pass	2.3G	2.36G	PK	2.35826G	5.19	-47.92	-44.75	-43.04	-37.85	-21.2	-16.65
2437MHz	Pass	2.36G	2.4G	PK	2.3894G	5.19	-38.77	-40.49	-36.54	-31.35	-21.2	-10.15
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.19	-39.63	-42.42	-37.79	-32.60	-21.2	-11.40
2437MHz	Pass	2.4835G	2.5235G	PK	2.48598G	5.19	-37.04	-43.05	-36.07	-30.88	-21.2	-9.68
2437MHz	Pass	2.5235G	2.6G	PK	2.52465G	5.19	-49.16	-46.88	-44.86	-39.67	-21.2	-18.47
2462MHz	Pass	2.3G	2.36G	AV	2.35958G	5.29	-58.57	-59.62	-56.05	-50.76	-41.2	-9.56
2462MHz	Pass	2.36G	2.4G	AV	2.388G	5.29	-57.38	-56.33	-53.81	-48.52	-41.2	-7.32
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.29	-50.56	-51.51	-48	-42.71	-41.2	-1.51
2462MHz	Pass	2.4835G	2.5235G	AV	2.48354G	5.29	-50.72	-51.67	-48.16	-42.87	-41.2	-1.67
2462MHz	Pass	2.5235G	2.6G	AV	2.52434G	5.29	-57.42	-58.77	-55.03	-49.74	-41.2	-8.54
2462MHz	Pass	2.3G	2.36G	PK	2.3597G	5.29	-48.73	-47.66	-45.15	-39.86	-21.2	-18.66
2462MHz	Pass	2.36G	2.4G	PK	2.37948G	5.29	-45.38	-47.56	-43.32	-38.03	-21.2	-16.83
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.29	-29.34	-32.01	-27.46	-22.17	-21.2	-0.97
2462MHz	Pass	2.4835G	2.5235G	PK	2.48362G	5.29	-28.96	-30.84	-26.79	-21.50	-21.2	-0.30
2462MHz	Pass	2.5235G	2.6G	PK	2.52733G	5.29	-47.83	-45.67	-43.61	-38.32	-21.2	-17.12
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.35796G	4.73	-55.76	-56.84	-53.26	-48.53	-41.2	-7.33
2412MHz	Pass	2.36G	2.4G	AV	2.3898G	4.73	-49.06	-50.77	-46.82	-42.09	-41.2	-0.89
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	4.73	-58.34	-59.23	-55.75	-51.02	-41.2	-9.82
2412MHz	Pass	2.4835G	2.5235G	AV	2.4837G	4.73	-58.35	-58.34	-55.33	-50.60	-41.2	-9.40
2412MHz	Pass	2.5235G	2.6G	AV	2.52832G	4.73	-61.73	-60.85	-58.26	-53.53	-41.2	-12.33



Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2412MHz	Pass	2.3G	2.36G	PK	2.35988G	4.73	-43.07	-47.19	-41.65	-36.92	-21.2	-15.72
2412MHz	Pass	2.36G	2.4G	PK	2.38992G	4.73	-28.87	-30.21	-26.48	-21.75	-21.2	-0.55
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	4.73	-49.54	-48.13	-45.77	-41.04	-21.2	-19.84
2412MHz	Pass	2.4835G	2.5235G	PK	2.4839G	4.73	-47.57	-47.59	-44.57	-39.84	-21.2	-18.64
2412MHz	Pass	2.5235G	2.6G	PK	2.5284G	4.73	-51.39	-49.77	-47.49	-42.76	-21.2	-21.56
2437MHz	Pass	2.3G	2.36G	AV	2.357G	5.19	-55.99	-57.5	-53.67	-48.48	-41.2	-7.28
2437MHz	Pass	2.36G	2.4G	AV	2.39G	5.19	-51.68	-52.34	-48.99	-43.80	-41.2	-2.60
2437MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.19	-52.81	-53.21	-50	-44.81	-41.2	-3.61
2437MHz	Pass	2.4835G	2.5235G	AV	2.48354G	5.19	-52.65	-52.82	-49.72	-44.53	-41.2	-3.33
2437MHz	Pass	2.5235G	2.6G	AV	2.52488G	5.19	-57.62	-59.43	-55.42	-50.23	-41.2	-9.03
2437MHz	Pass	2.3G	2.36G	PK	2.34836G	5.19	-45.13	-47.42	-43.12	-37.93	-21.2	-16.73
2437MHz	Pass	2.36G	2.4G	PK	2.38956G	5.19	-37.59	-37.94	-34.75	-29.56	-21.2	-8.36
2437MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.19	-40.81	-39.28	-36.97	-31.78	-21.2	-10.58
2437MHz	Pass	2.4835G	2.5235G	PK	2.4843G	5.19	-36.84	-39.91	-35.1	-29.91	-21.2	-8.71
2437MHz	Pass	2.5235G	2.6G	PK	2.52893G	5.19	-48.09	-48.01	-45.04	-39.85	-21.2	-18.65
2462MHz	Pass	2.3G	2.36G	AV	2.35646G	5.29	-59.05	-59.83	-56.41	-51.12	-41.2	-9.92
2462MHz	Pass	2.36G	2.4G	AV	2.38708G	5.29	-58.11	-57.28	-54.66	-49.37	-41.2	-8.17
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	5.29	-50.31	-53.58	-48.63	-43.34	-41.2	-2.14
2462MHz	Pass	2.4835G	2.5235G	AV	2.48354G	5.29	-49.53	-53.32	-48.01	-42.72	-41.2	-1.52
2462MHz	Pass	2.5235G	2.6G	AV	2.52847G	5.29	-59.3	-57.89	-55.53	-50.24	-41.2	-9.04
2462MHz	Pass	2.3G	2.36G	PK	2.35586G	5.29	-50	-48.31	-46.06	-40.77	-21.2	-19.57
2462MHz	Pass	2.36G	2.4G	PK	2.38932G	5.29	-49.37	-46.51	-44.7	-39.41	-21.2	-18.21
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	5.29	-30.25	-35.74	-29.17	-23.88	-21.2	-2.68
2462MHz	Pass	2.4835G	2.5235G	PK	2.4839G	5.29	-30.45	-35.67	-29.31	-24.02	-21.2	-2.82
2462MHz	Pass	2.5235G	2.6G	PK	2.5248G	5.29	-48.31	-47.11	-44.66	-39.37	-21.2	-18.17

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

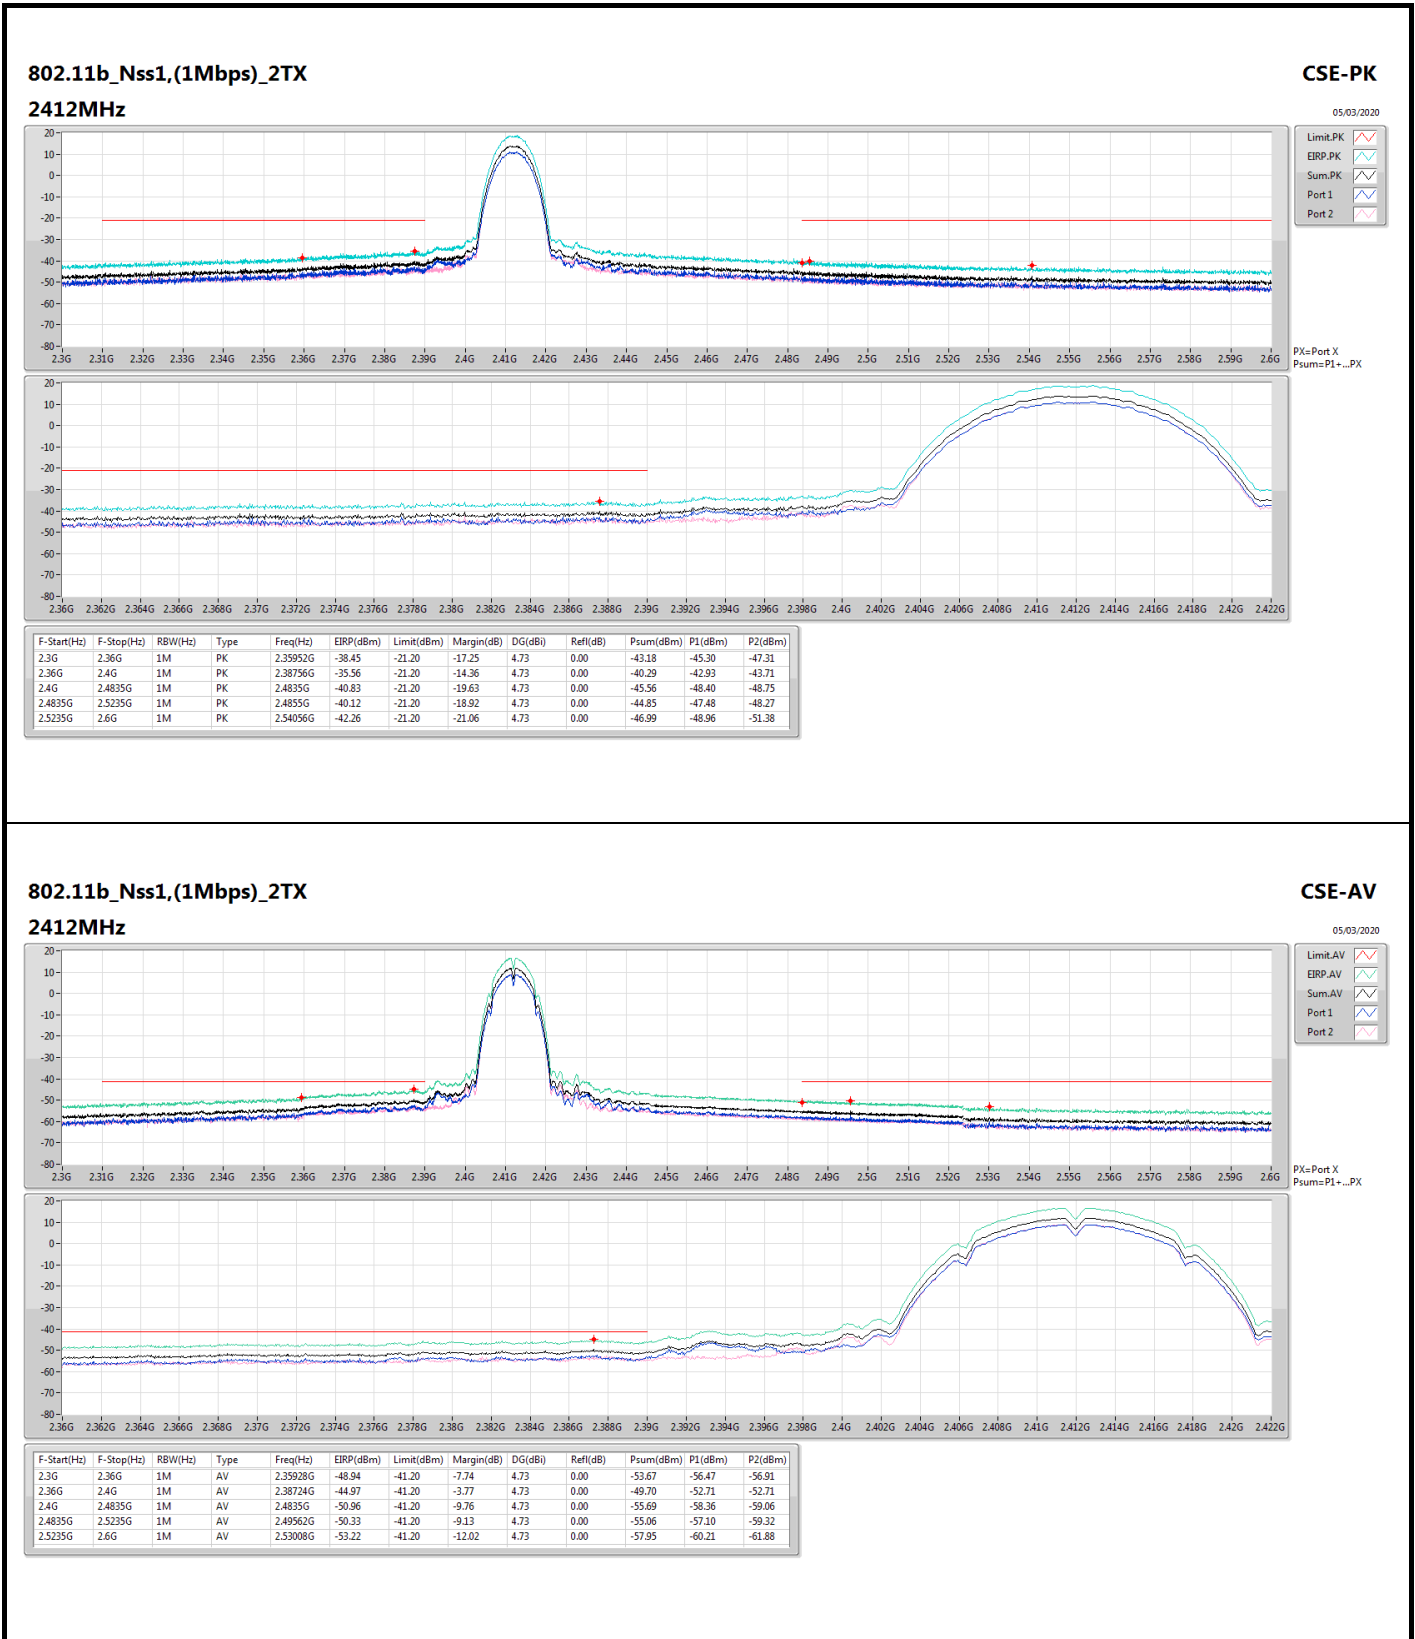




802.11b_Nss1,(1Mbps)_2TX


2412MHz


CSE-AV

05/03/2020

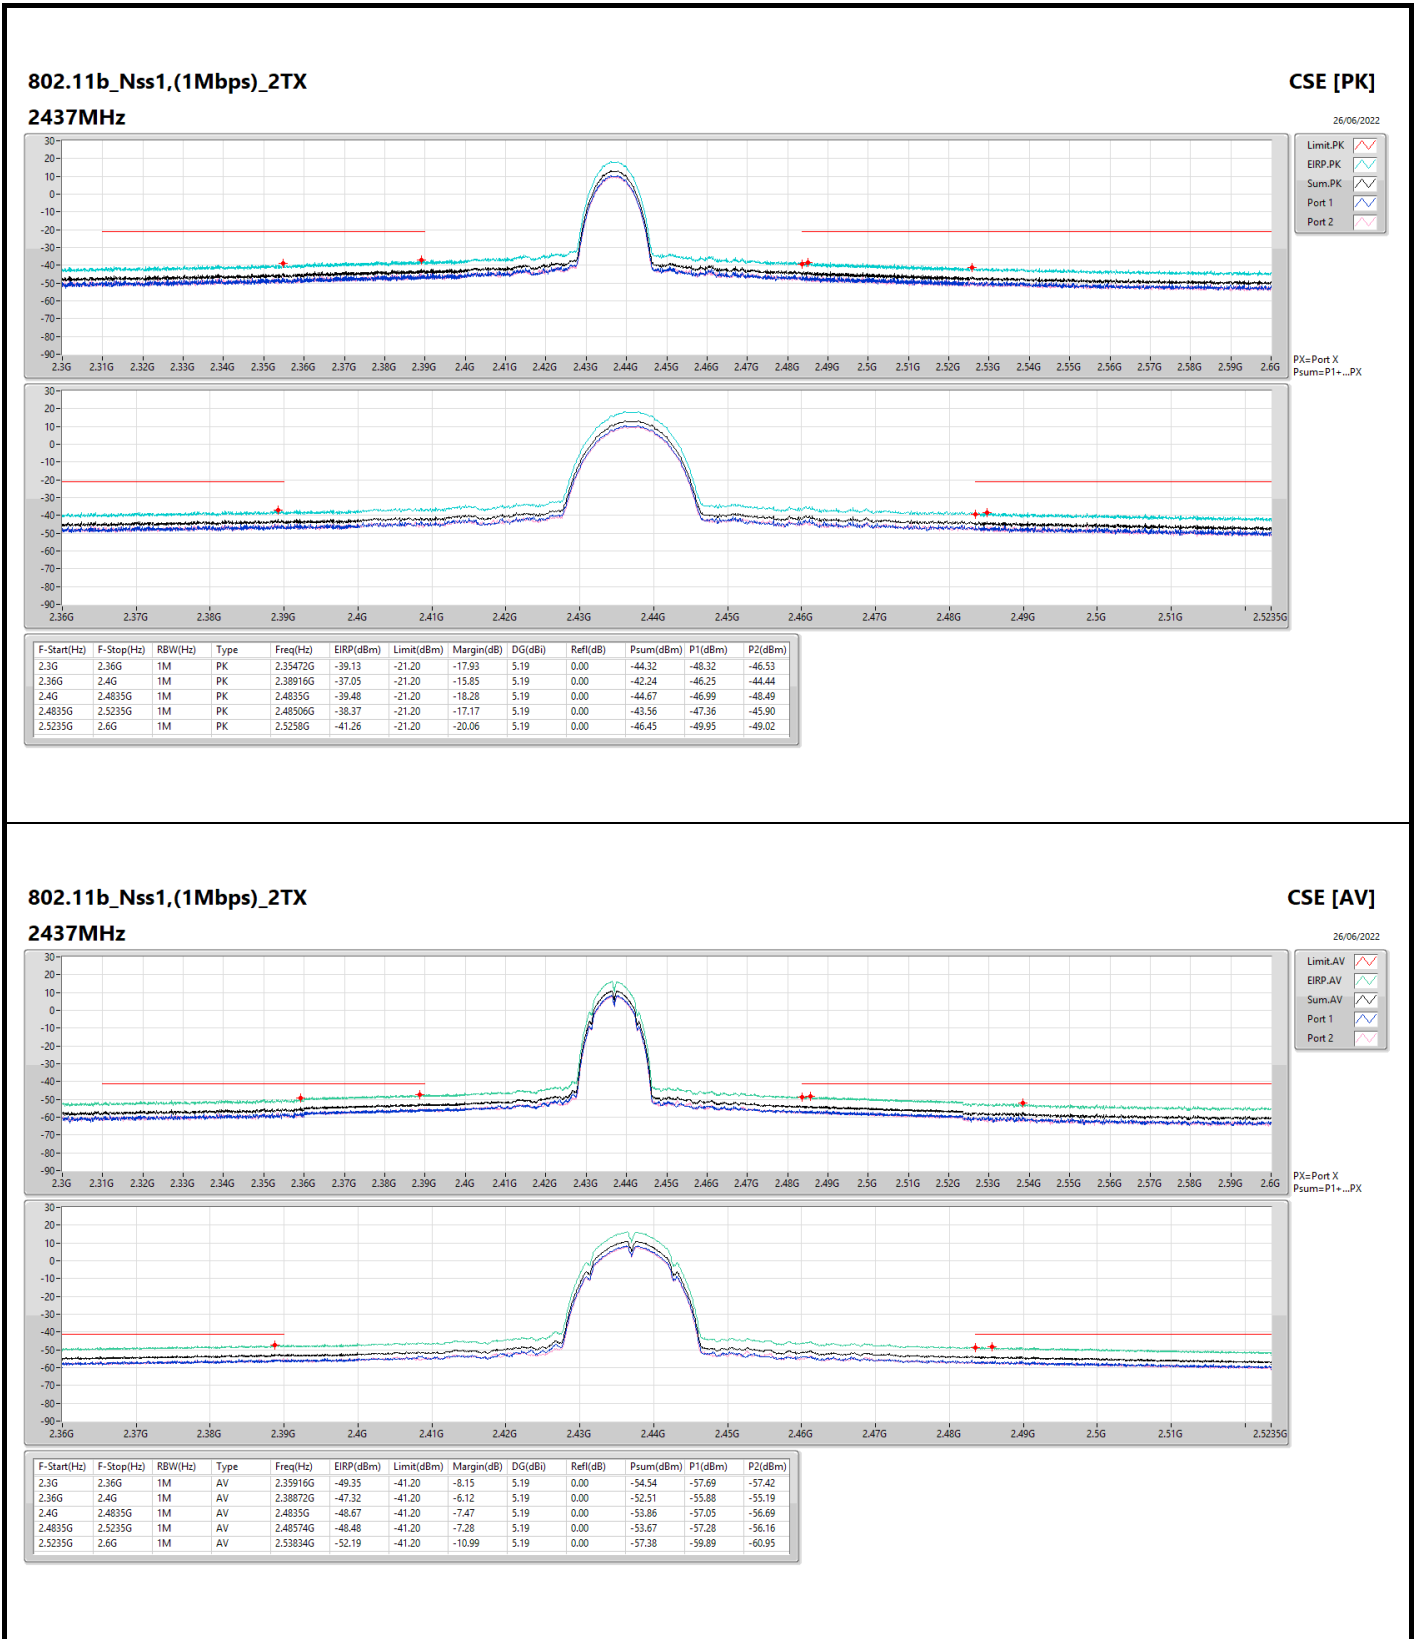

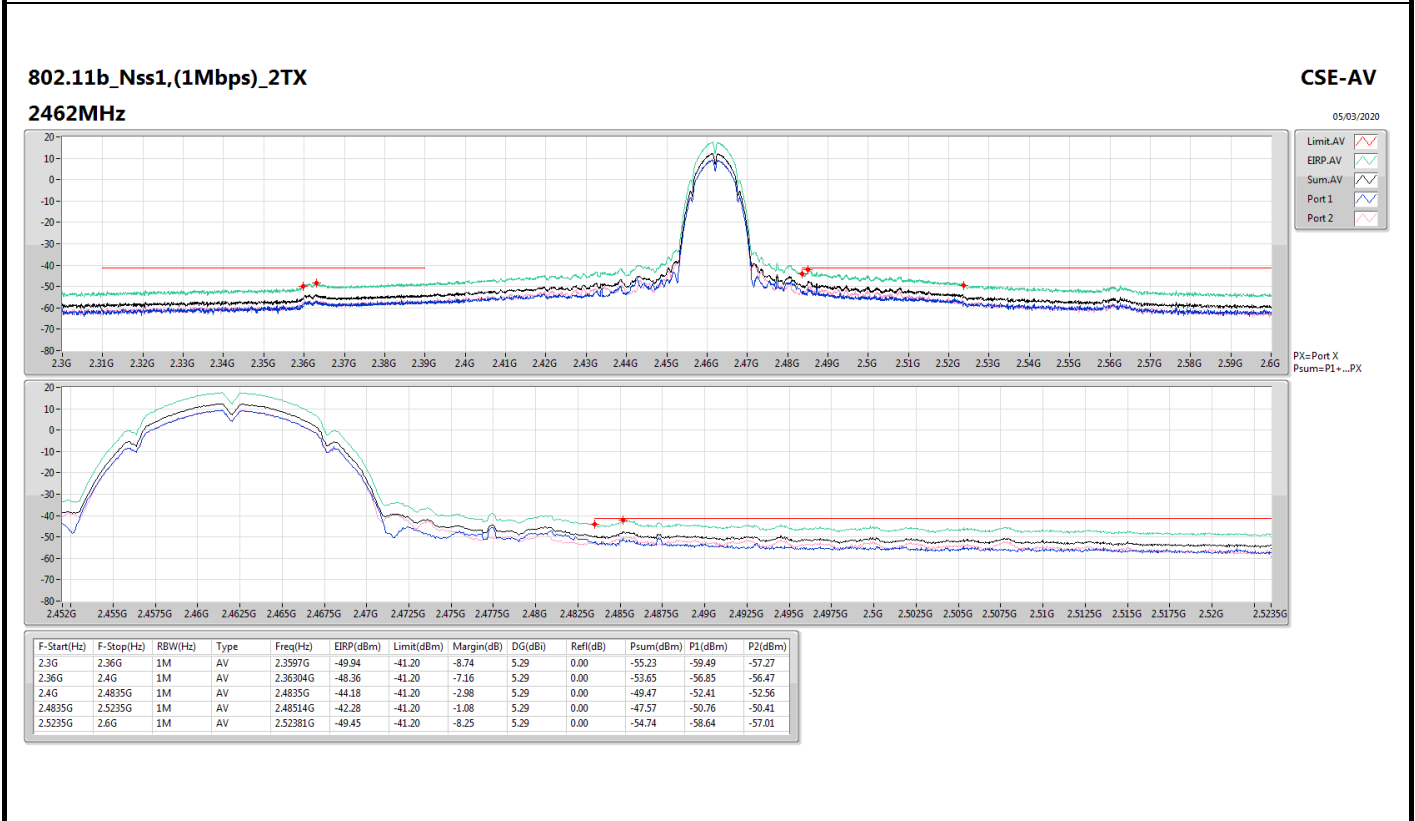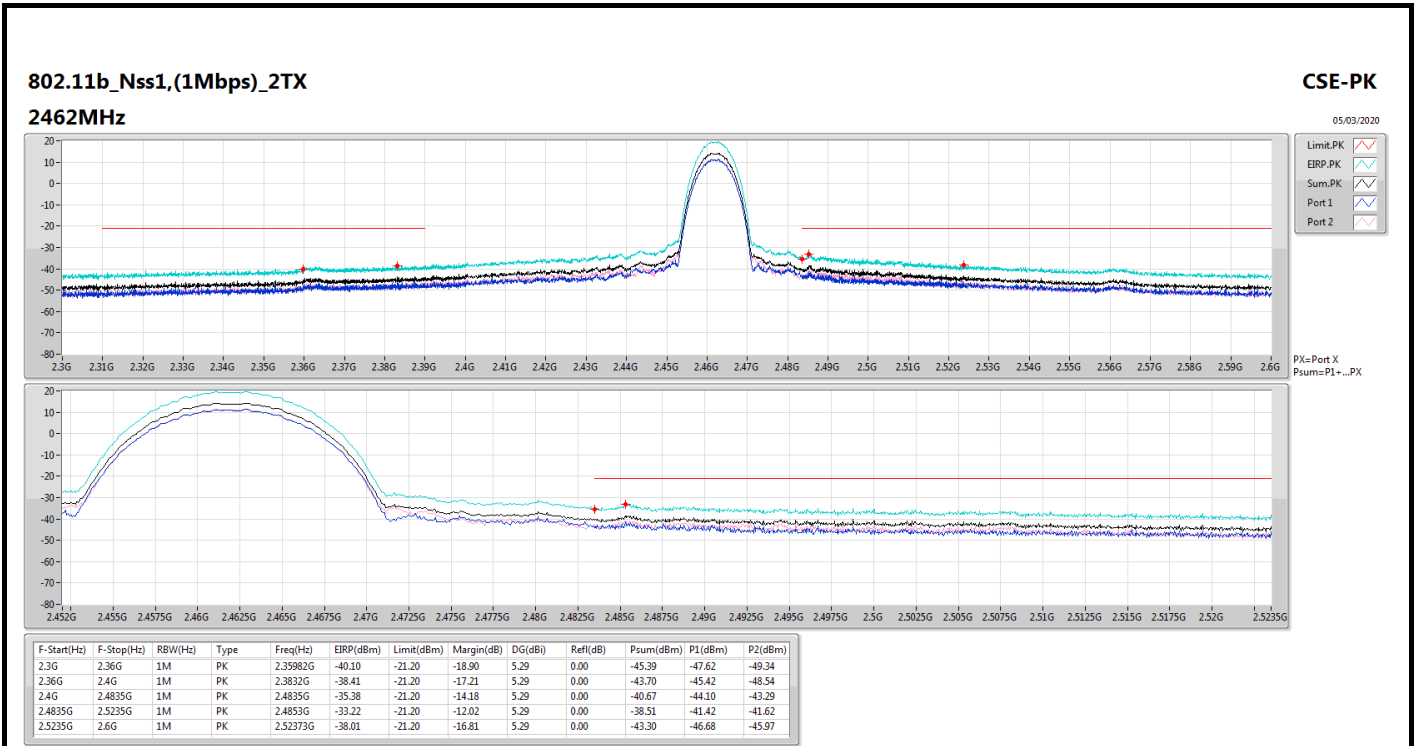

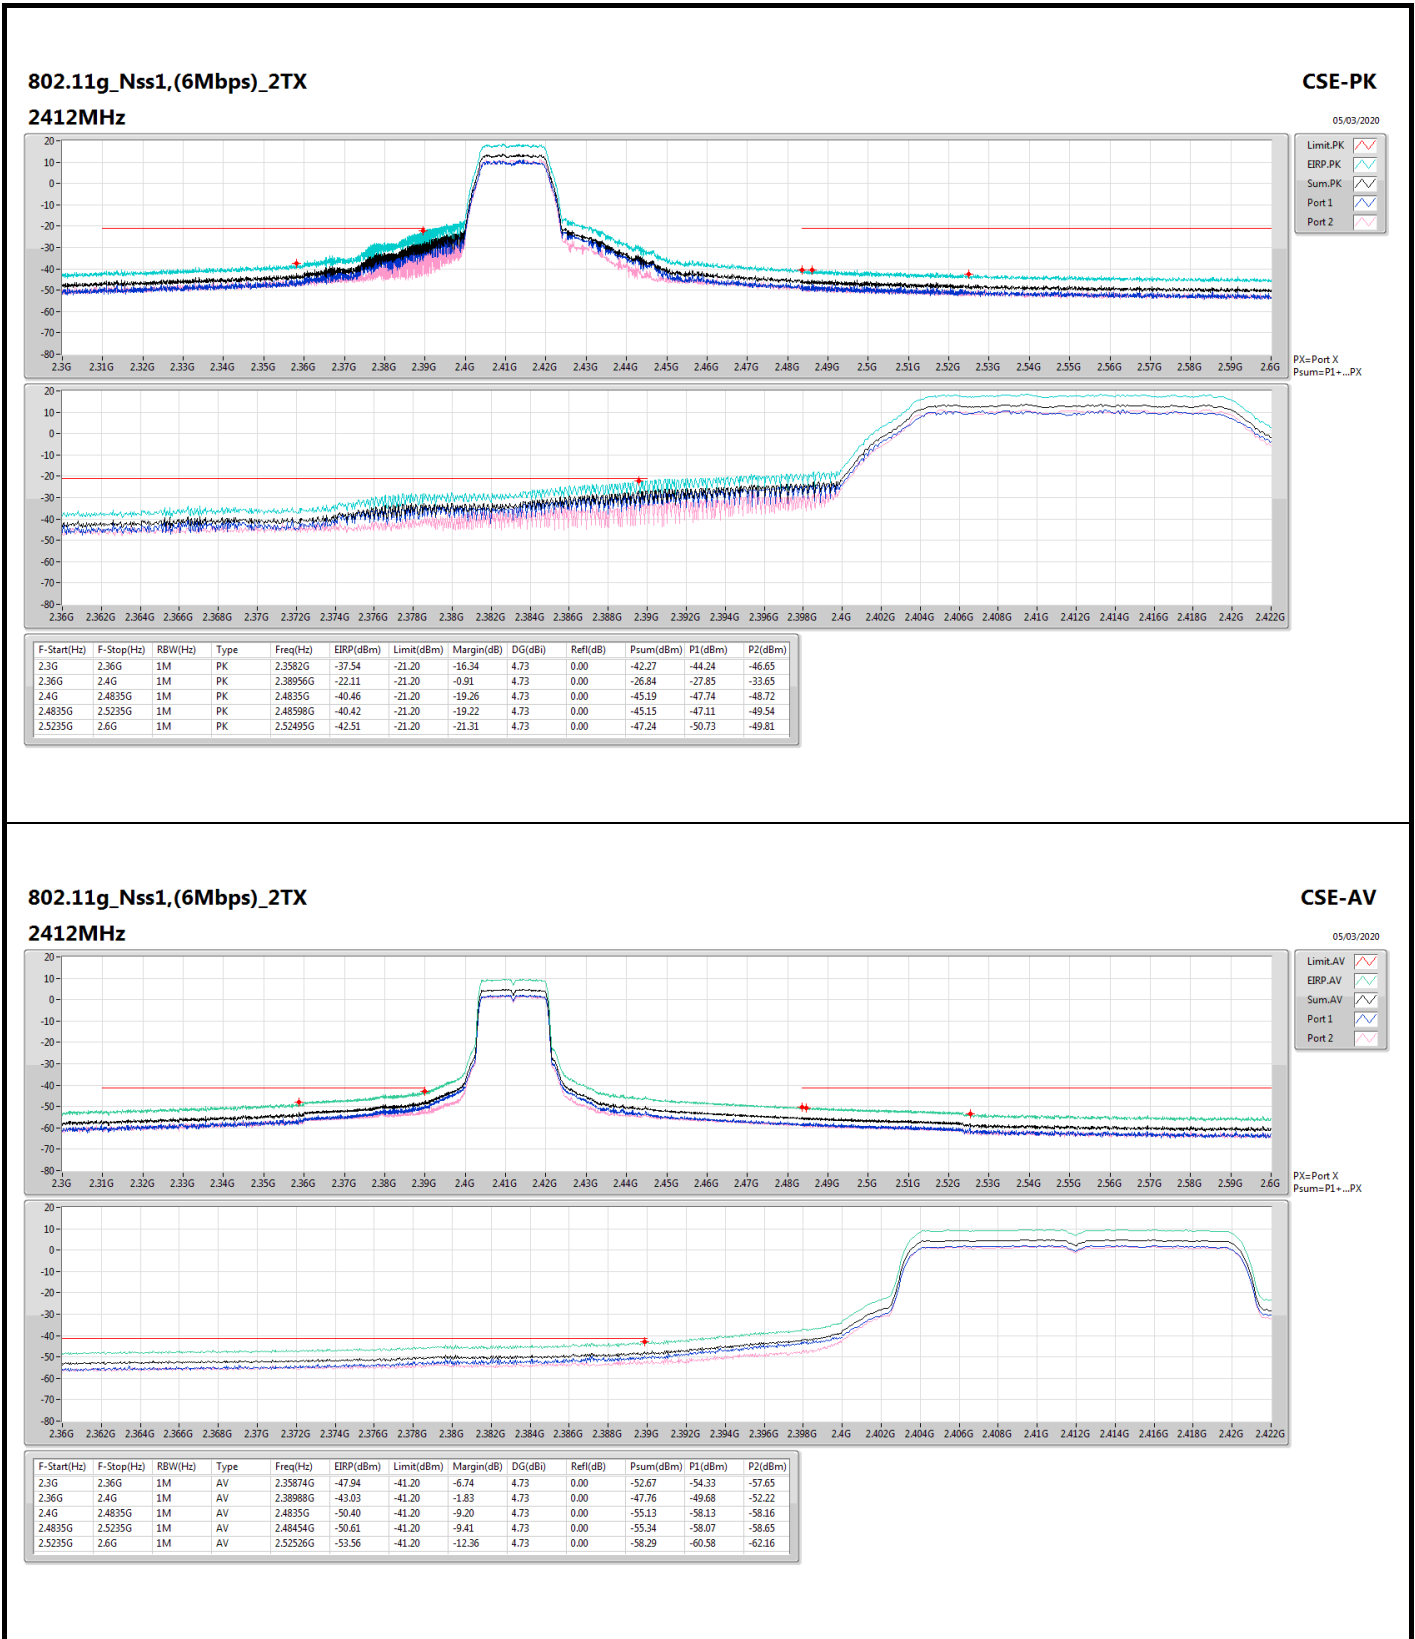

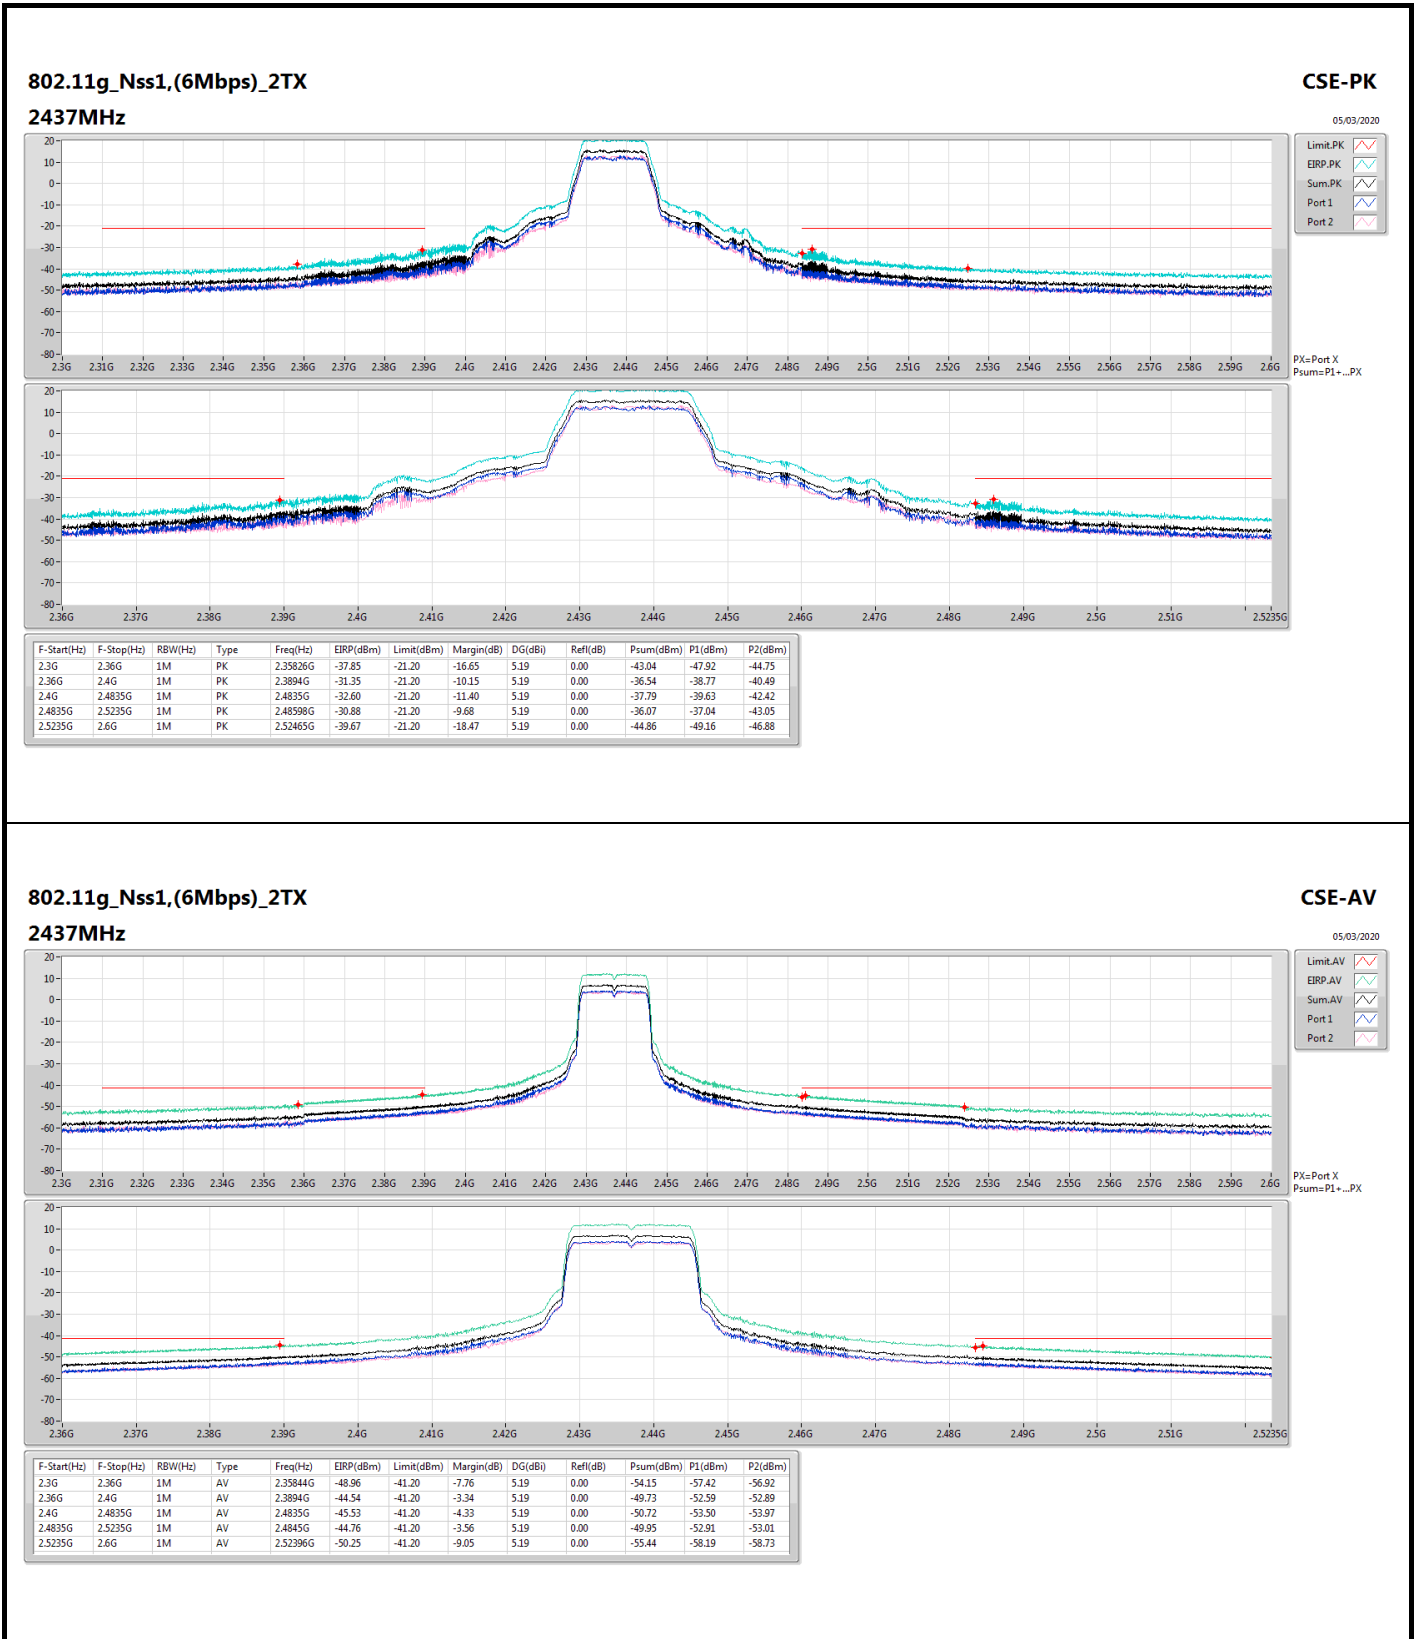

CSE-AV

05/03/2020


Limit.AV

EIRP.AV

Sum.AV

Port 1

Port 2

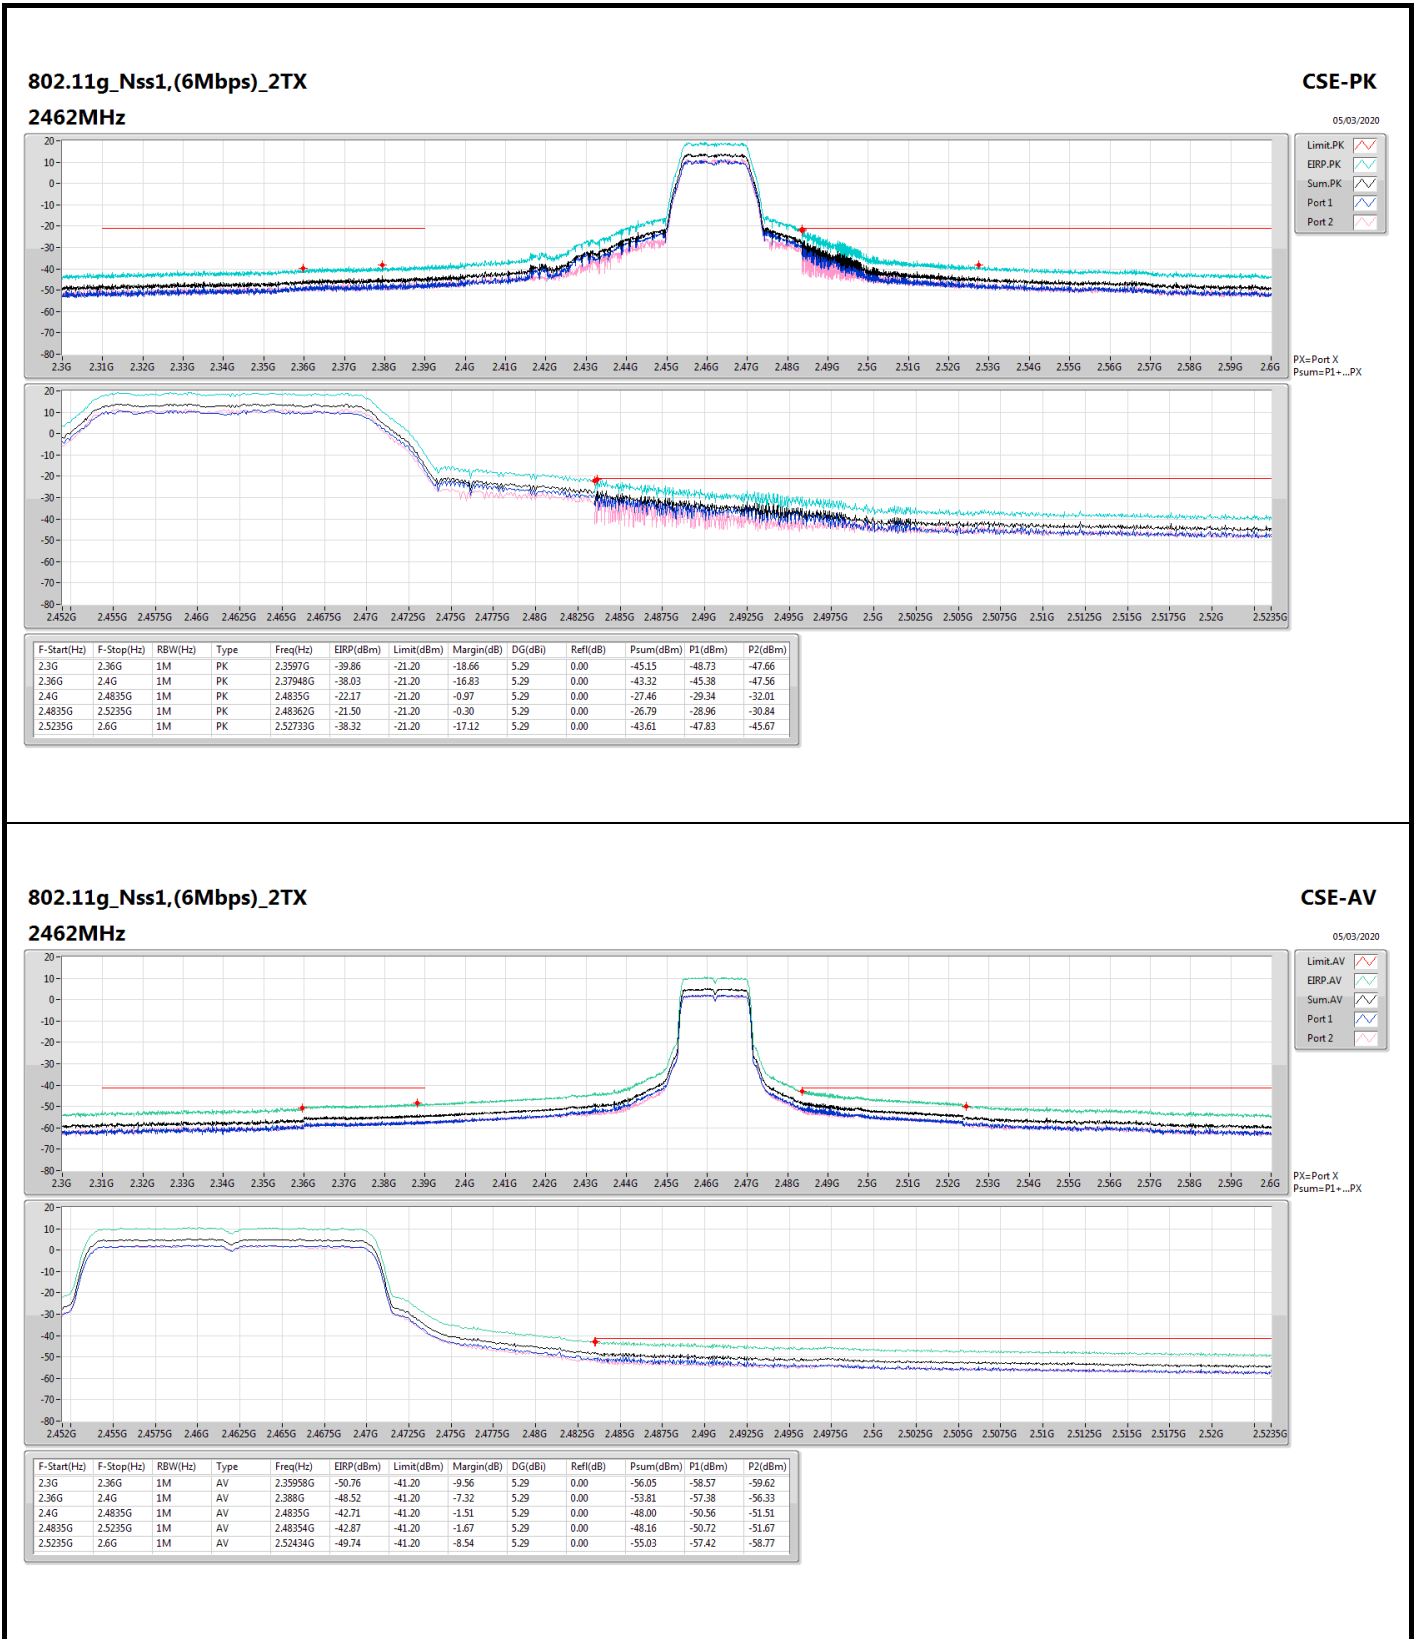

CSE-AV

05/03/2020



Limit.AV


EIRP.AV


Sum.AV

Port 1

Port 2

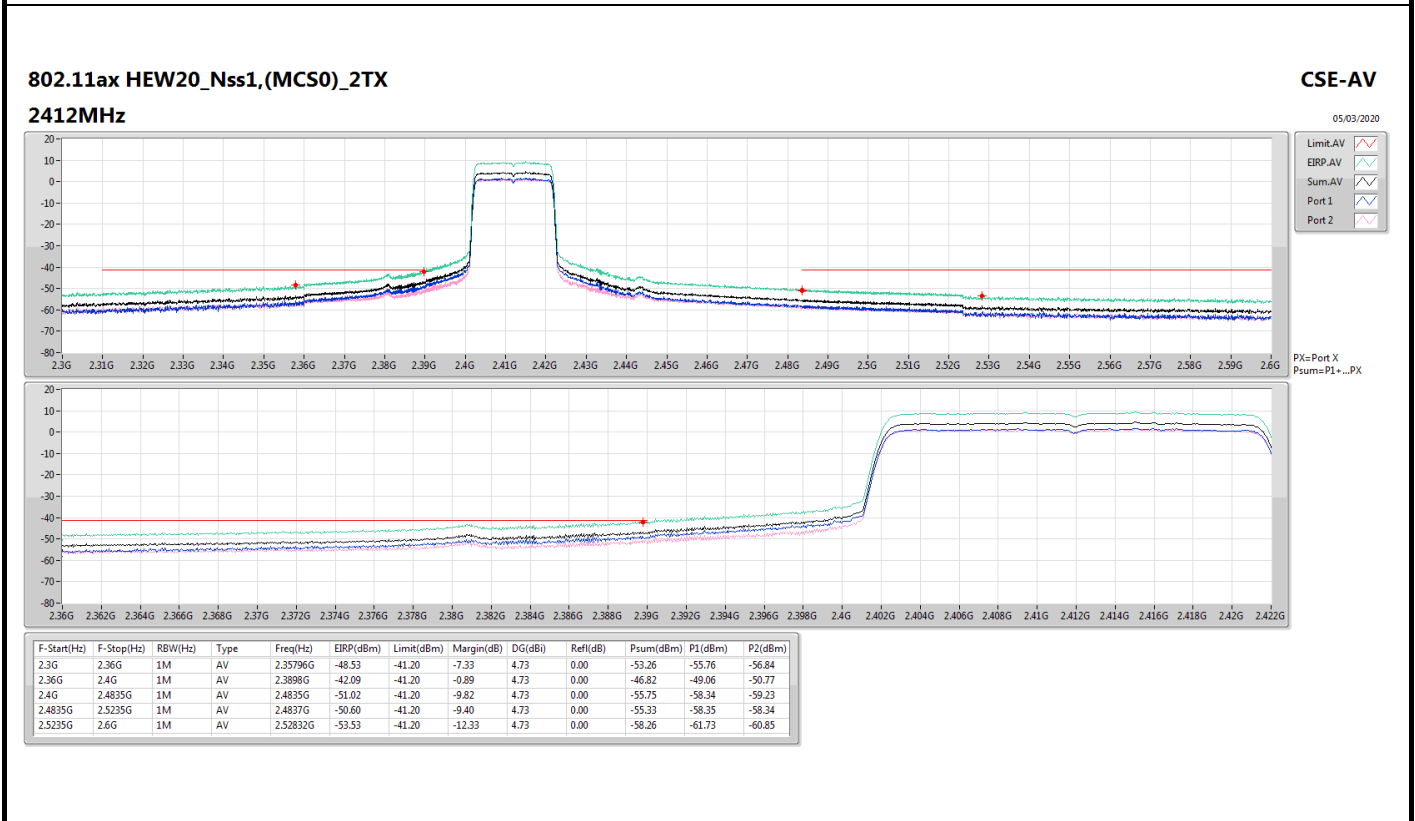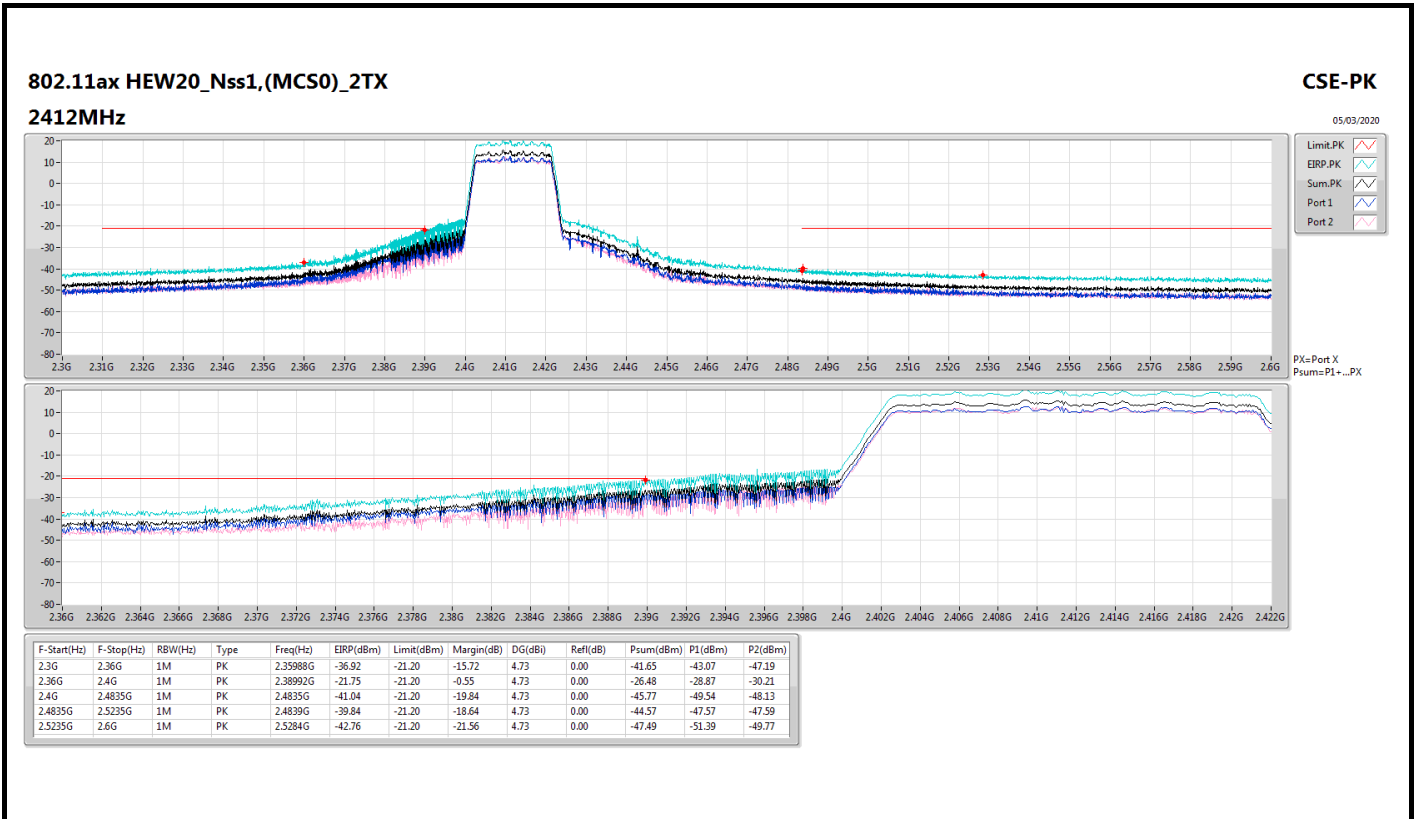

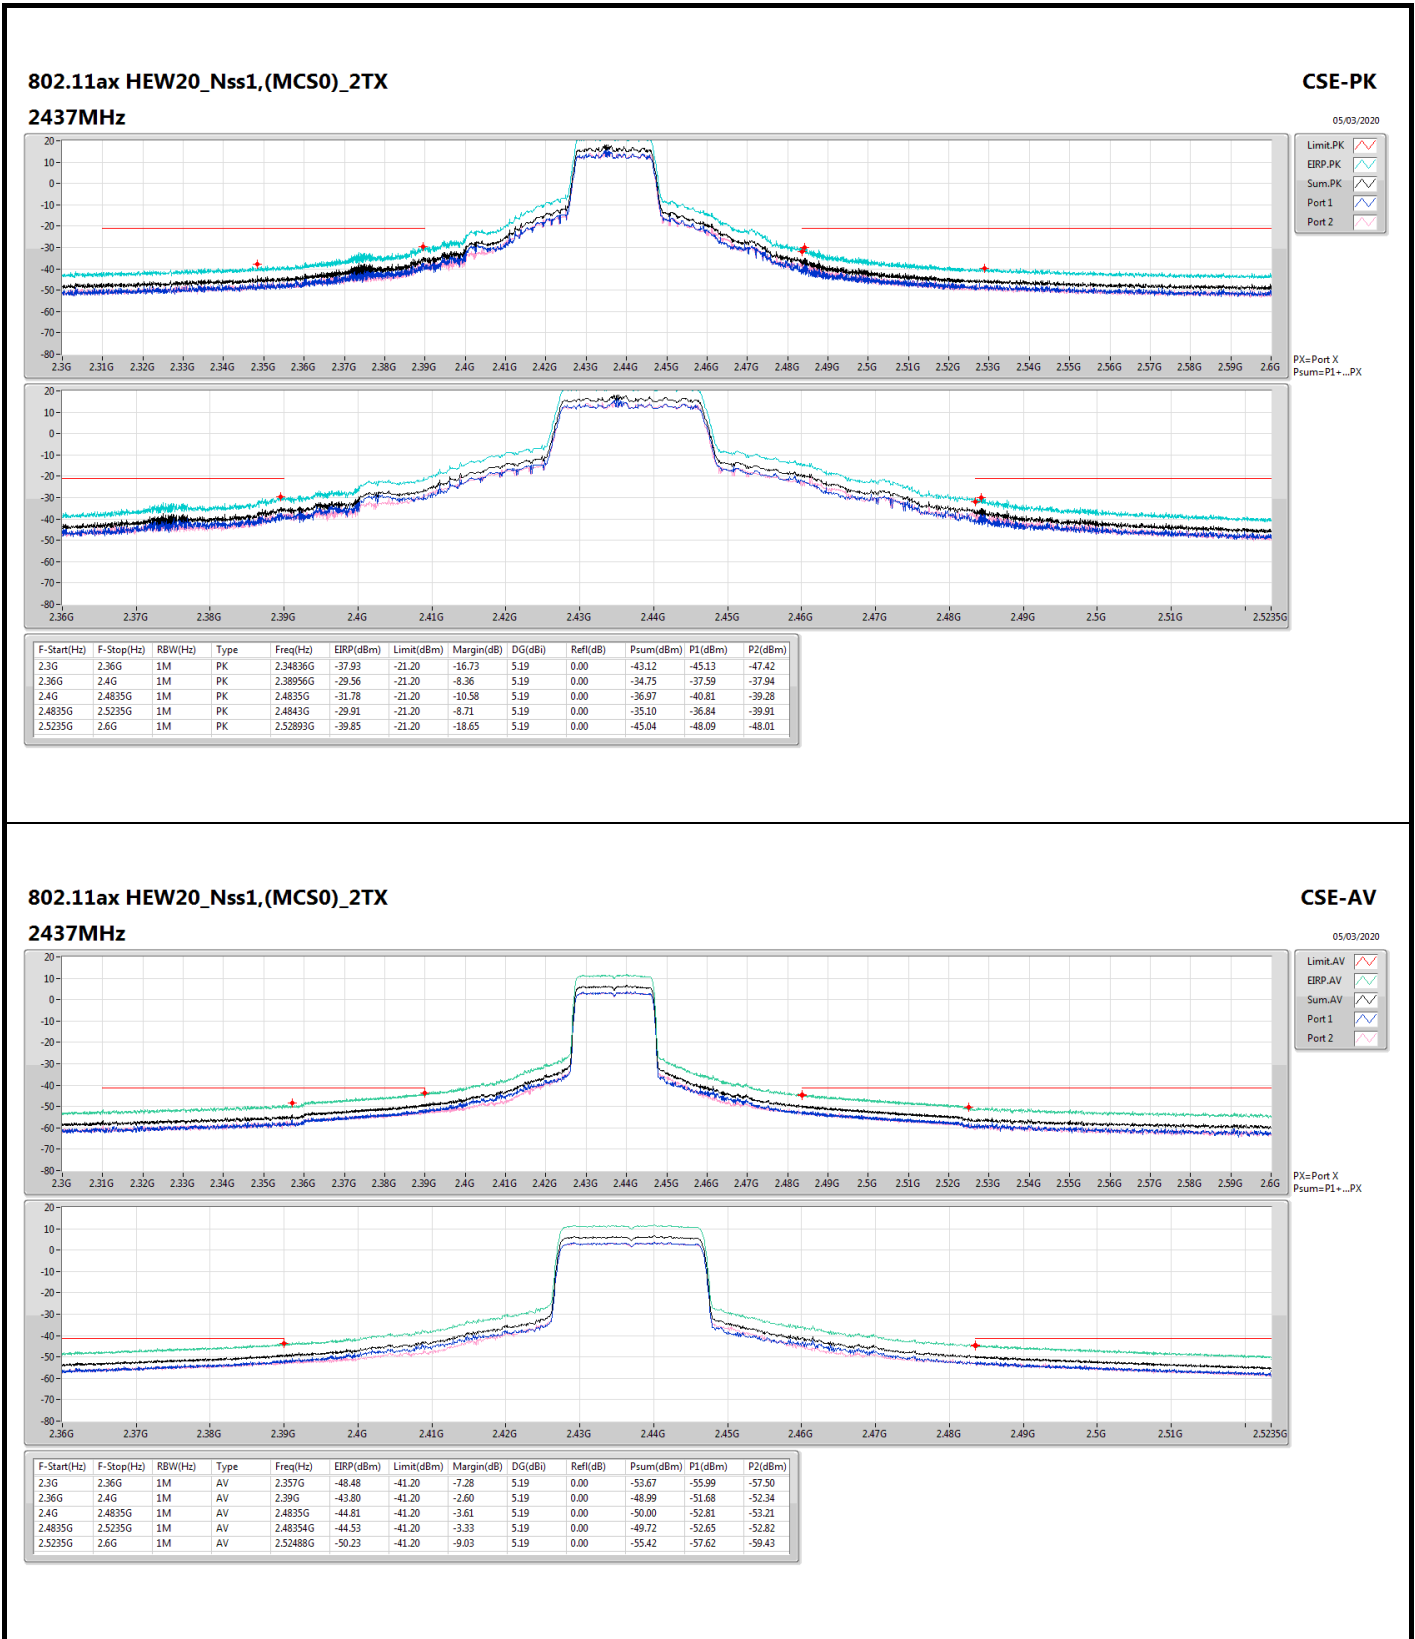

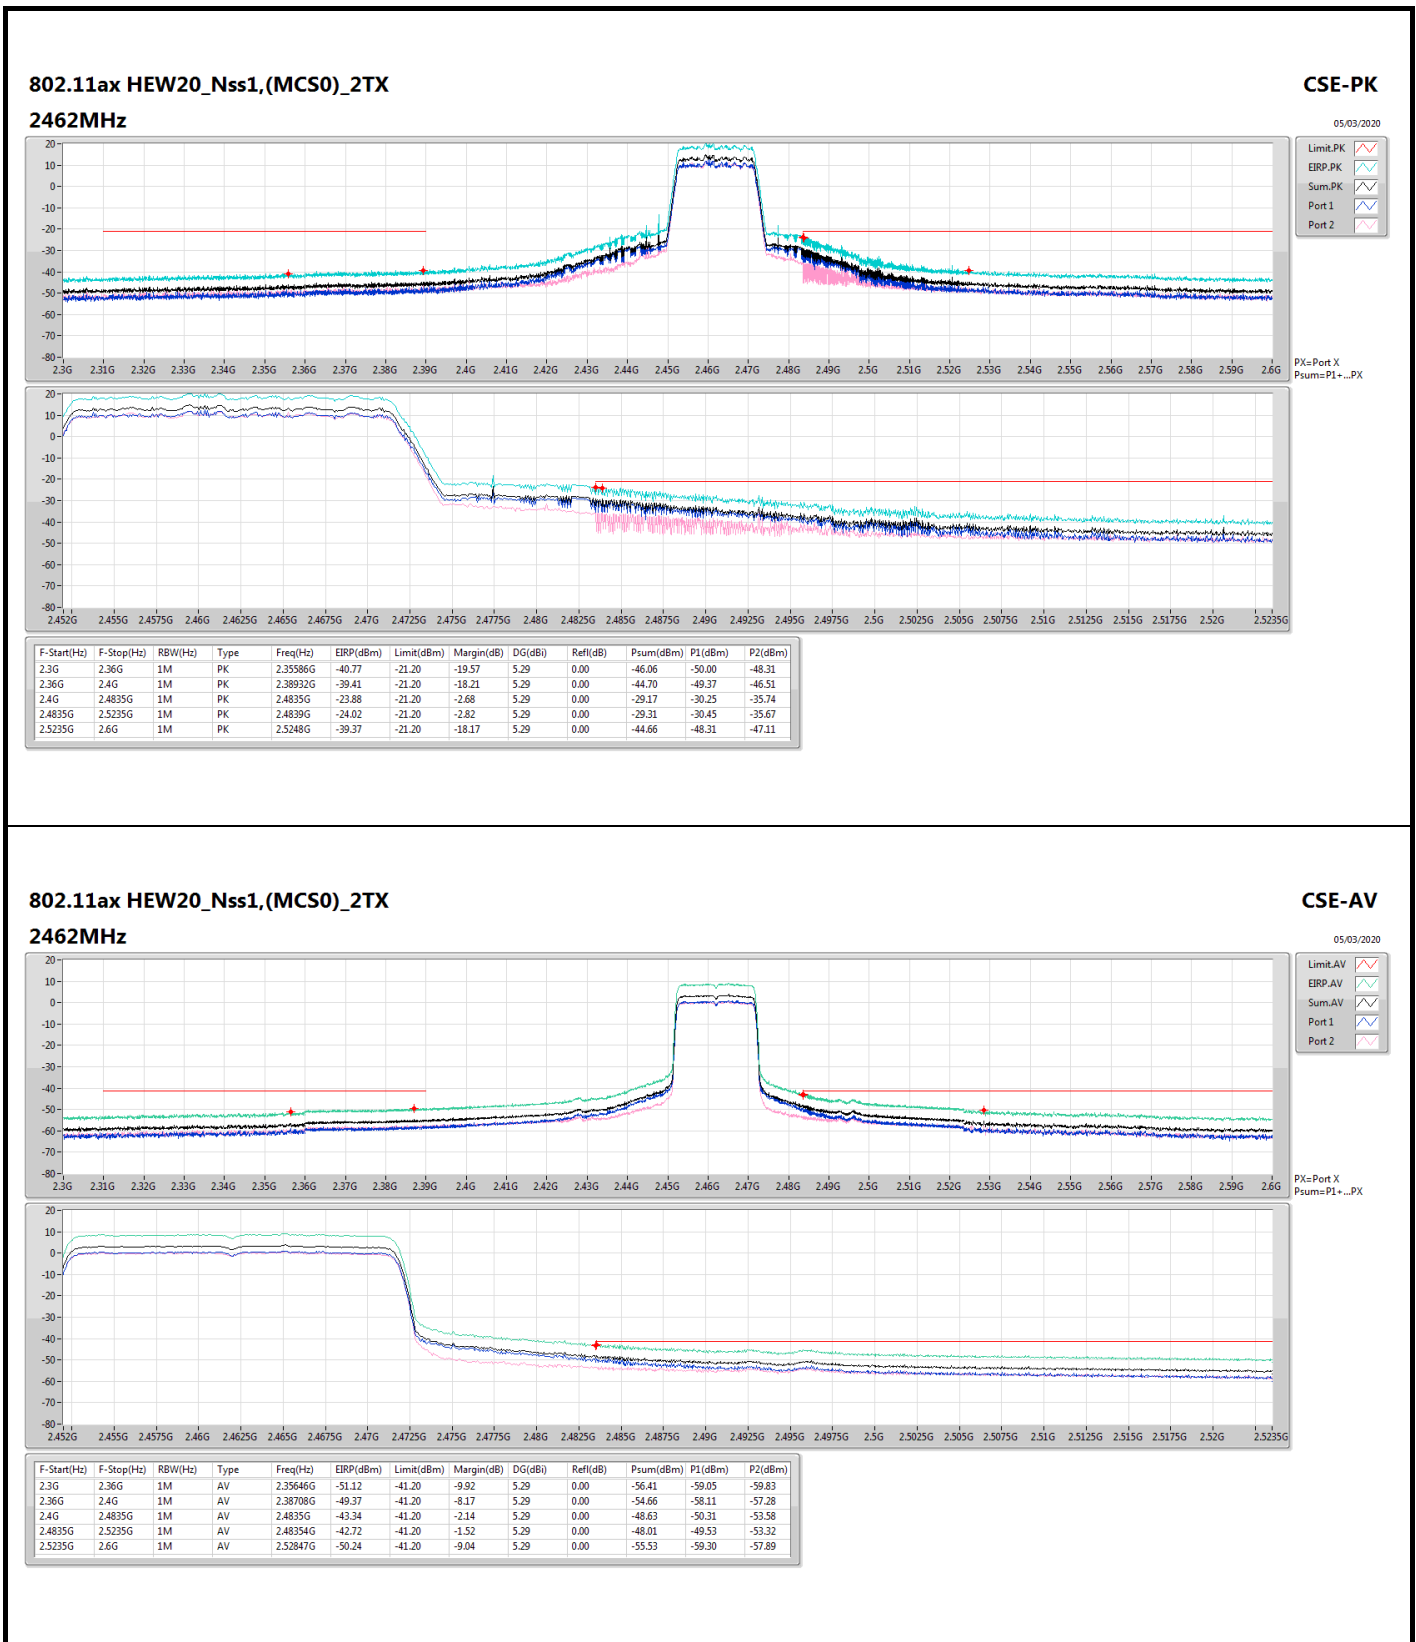



<2T2S>

For Conducted Bandedge:

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	2.4835G	2.5235G	PK	2.4847G	2.28	-28.08	-32.01	-26.60	-24.32	-21.20	-3.12

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.3G	2.36G	AV	2.35898G	2.00	-56.50	-56.17	-53.32	-51.32	-41.20	-10.12
2412MHz	Pass	2.36G	2.4G	AV	2.38952G	2.00	-48.53	-51.11	-46.62	-44.62	-41.20	-3.42
2412MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.00	-58.56	-58.89	-55.71	-53.71	-41.20	-12.51
2412MHz	Pass	2.4835G	2.5235G	AV	2.48418G	2.00	-57.60	-58.49	-55.01	-53.01	-41.20	-11.81
2412MHz	Pass	2.5235G	2.6G	AV	2.52832G	2.00	-60.33	-61.78	-57.98	-55.98	-41.20	-14.78
2412MHz	Pass	2.3G	2.36G	PK	2.3588G	2.00	-45.05	-43.50	-41.20	-39.20	-21.20	-18.00
2412MHz	Pass	2.36G	2.4G	PK	2.389G	2.00	-27.49	-36.45	-26.97	-24.97	-21.20	-3.77
2412MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.00	-48.74	-47.57	-45.11	-43.11	-21.20	-21.91
2412MHz	Pass	2.4835G	2.5235G	PK	2.48514G	2.00	-47.44	-48.46	-44.91	-42.91	-21.20	-21.71
2412MHz	Pass	2.5235G	2.6G	PK	2.52687G	2.00	-51.22	-49.06	-47.00	-45.00	-21.20	-23.80
2462MHz	Pass	2.3G	2.36G	AV	2.35766G	2.28	-59.22	-58.80	-55.99	-53.71	-41.20	-12.51
2462MHz	Pass	2.36G	2.4G	AV	2.38968G	2.28	-56.86	-57.30	-54.06	-51.78	-41.20	-10.58
2462MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.28	-52.00	-52.89	-49.41	-47.13	-41.20	-5.93
2462MHz	Pass	2.4835G	2.5235G	AV	2.48366G	2.28	-50.86	-52.52	-48.60	-46.32	-41.20	-5.12
2462MHz	Pass	2.5235G	2.6G	AV	2.52664G	2.28	-57.69	-59.01	-55.29	-53.01	-41.20	-11.81
2462MHz	Pass	2.3G	2.36G	PK	2.35298G	2.28	-48.02	-49.07	-45.50	-43.22	-21.20	-22.02
2462MHz	Pass	2.36G	2.4G	PK	2.38908G	2.28	-46.31	-48.61	-44.30	-42.02	-21.20	-20.82
2462MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.28	-27.42	-37.07	-26.97	-24.69	-21.20	-3.49
2462MHz	Pass	2.4835G	2.5235G	PK	2.4847G	2.28	-28.08	-32.01	-26.60	-24.32	-21.20	-3.12
2462MHz	Pass	2.5235G	2.6G	PK	2.52373G	2.28	-45.49	-48.82	-43.83	-41.55	-21.20	-20.35

DG = Directional Gain;
 PX=Port X; Psum=P1+.P2+...PX

