



A D T

## Supplemental “Transmit Simultaneously” Test Report

**REPORT NO.:** RF991006E03-2 R1

**MODEL NO.:** REN301Z-xx, TEI301Z-xx, TES301Z-xx

**FCC ID:** LDK-TEI301Z

**IC ID:** 2461B-TEI301Z

**RECEIVED:** Oct. 06, 2010

**TESTED:** Oct. 14 to 26, 2010

**ISSUED:** Feb. 08, 2011

**APPLICANT:** Cisco Systems Inc.

**ADDRESS:** 170 West Tasman Drive, San Jose, CA 95134-1706,  
USA.

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS:** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 27 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by any government agencies. The test results in the report only apply to the tested sample.





A D T

## Table of Contents

RELEASE CONTROL RECORD.....	3
1 CERTIFICATION .....	4
2 SUMMARY OF TEST RESULTS .....	5
2.1 MEASUREMENT UNCERTAINTY .....	5
3 GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF EUT .....	6
3.2 DESCRIPTION OF TEST MODES .....	9
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: .....	10
3.4 DESCRIPTION OF SUPPORT UNITS.....	12
3.5 CONFIGURATION OF SYSTEM UNDER TEST .....	13
4 TEST TYPES AND RESULTS .....	14
4.1 CONDUCTED EMISSION MEASUREMENT .....	14
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	14
4.1.2 TEST INSTRUMENTS.....	14
4.1.3 TEST PROCEDURES .....	15
4.1.4 DEVIATION FROM TEST STANDARD.....	15
4.1.5 TEST SETUP .....	15
4.1.6 EUT OPERATING CONDITIONS .....	16
4.1.7 TEST RESULTS .....	17
4.2 RADIATED EMISSION MEASUREMENT .....	19
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	19
4.2.2 TEST INSTRUMENTS.....	20
4.2.3 TEST PROCEDURES .....	22
4.2.4 TEST SETUP .....	23
4.2.5 EUT OPERATING CONDITIONS .....	23
4.2.6 TEST RESULTS .....	24
4.2.7 TEST RESULTS .....	25
5 INFORMATION ON THE TESTING LABORATORIES .....	26
6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	27



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Jan. 19, 2011
RF991006E03-2 R1	Modified the product name of the EUT	Feb. 08, 2011



A D T

## 1 CERTIFICATION

**PRODUCT :** IP Managed Services Home Gateway  
**BRAND NAME :** Cisco  
**MODEL NO. :** REN301Z-xx, TEI301Z-xx, TES301Z-xx  
**TESTED :** Oct. 14 to 26, 2010  
**APPLICANT :** Cisco Systems Inc.  
**TEST SAMPLE :** MASS-PRODUCTION  
**STANDARDS :** FCC Part 15, Subpart C  
ANSI C63.4-2003  
ANSI C63.10-2009  
Canada RSS-210 issue 8 (2010-12)  
Canada RSS-Gen issue 3 (2010-12)

The above equipment (Model: TEI301Z-NA) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Sunny Wen, **DATE:** Feb. 08, 2011  
( Sunny Wen, Specialist )

**TECHNICAL ACCEPTANCE :** Hank Chung, **DATE:** Feb. 08, 2011  
( Hank Chung, Deputy Manager )

**APPROVED BY :** May Chen, **DATE:** Feb. 08, 2011  
( May Chen, Deputy Manager )

### Note:

Per a request of the FCC, the IP Managed Services Home Gateway was tested for conducted emissions and radiated emissions in restricted bands while transmitting on both WLAN and ZigBee at simultaneously.



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.46dB at 0.181MHz
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.63 dB at 36.87 MHz

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz) – Chamber H	3.76 dB
Radiated emissions (1GHz -18GHz) – Chamber G	2.19 dB
Radiated emissions (18GHz -40GHz) – Chamber G	2.56 dB



A D T

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	IP Managed Services Home Gateway
<b>MODEL NO.</b>	REN301Z-xx, TEI301Z-xx, TES301Z-xx
<b>FCC ID</b>	LDK-TEI301Z
<b>IC ID</b>	2461B-TEI301Z
<b>POWER SUPPLY</b>	DC 12V from power adapter
<b>MODULATION TYPE</b>	For WLAN : CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
	For ZigBee : O-QPSK
<b>MODULATION TECHNOLOGY</b>	For WLAN : DSSS, OFDM
	For ZigBee : O-QPSK
<b>TRANSFER RATE</b>	For WLAN : 802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps 802.11n (20MHz, 800ns GI): 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps 802.11n (40MHz, 800ns GI): 135 / 121.5 / 108 / 81 / 54 / 40.5 / 27 / 13.5Mbps 802.11n (20MHz, 400ns GI): 72.2 / 65 / 57.8 / 43.3 / 28.9 / 21.7 / 14.4 / 7.2Mbps 802.11n (40MHz, 400ns GI): 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15Mbps
	For ZigBee : 250kbps
<b>FREQUENCY RANGE</b>	For WLAN :2412MHz ~ 2462MHz
	For ZigBee : 2405MHz ~ 2480MHz
<b>NUMBER OF CHANNEL</b>	For WLAN : 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
	For ZigBee : 16
<b>MAXIMUM OUTPUT POWER</b>	For WLAN : 802.11b: 151.4mW 802.11g: 338.8mW 802.11n (20MHz): 625.3mW 802.11n (40MHz): 296.5mW
	For ZigBee : NA
<b>ANTENNA TYPE</b>	Please see note 3
<b>DATA CABLE</b>	NA

<b>I/O PORTS</b>	<b>For Model No.: REN301Z-xx</b> USB port x 2 Ethernet (10/100/1000Mbps) port x 4 Internet (10/100/1000Mbps) port x 1
	<b>For Model No.: TEI301Z-xx, TES301Z-xx</b> USB port x 2 Ethernet (10/100/1000Mbps) port x 4 Internet (10/100/1000Mbps) port x 1 PHONE port x 2
<b>ASSOCIATED DEVICES</b>	Adapter x 1

### Note :

1. There are ZigBee technology and WLAN technology used for the EUT.
2. The EUT has below model names, which are identical to each other in all aspects except for the following table:

Model No.	Basic Function	Add Function-1	Add Function-2	Add Function-3
		FXS x 2ch	SIM controller	Internal ZigBee
REN301Z-XX	Yes	-	-	Yes
TEI301Z-XX	Yes	Yes	Yes	Yes
TES301Z-XX	Yes	Yes	-	Yes

Note : The “ xx ” of Model Names could be 0~9, A~Z, a~z or blank

From the above models, model: **TEI301Z-NA** was selected as model for the test and its data was recorded in this report.

3. There are three antennas provided to this EUT, please refer to the following table:

WLAN					
Chain	Antenna Type	Antenna Gain (dBi)	Connector	Cable length (cm)	Cable Loss (dB)
Chain (0) Antenna (1)	PIFA	3	I-Pex	26	1
Chain (1) Antenna (2)	PIFA	3	I-Pex	21	1
ZigBee					
Chain	Antenna Type	Antenna Gain (dBi)	Connector	Cable length (cm)	Cable Loss (dB)
Chain (0) Antenna (1)	chip	0.5	NA	0	0

4. The EUT could be supplied with a power adapter and following two different model names could be chosen:

Adapter 1	
Brand:	DELTA
Model No.:	EADP-30RB A
Input power :	100-240V, 50/60Hz, 1A AC input cable (unshielded, 0.3m)
Output power :	12V, 2.5A DC output cable (unshielded, 1.5m)
Adapter 2	
Brand:	PHIHONG
Model No.:	PSA24A-120
Input power :	100-240V, 50/60Hz, 0.6A
Output power :	12V, 2.0A DC output cable (unshielded, 1.5m)

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



## 3.2 DESCRIPTION OF TEST MODES

### For WLAN :

Eleven channels are provided for 802.11b, 802.11g:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

### For ZigBee:

Sixteen channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2405	5	2425	9	2445	13	2465
2	2410	6	2430	10	2450	14	2470
3	2415	7	2435	11	2455	15	2475
4	2420	8	2440	12	2460	16	2480

### 3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to			Description
	PLC	RE<1G	RE≥1G	
A	√	√	√	Co-located mode with adapter 2

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz  
RE≥1G: Radiated Emission above 1GHz

#### POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
WLAN + ZigBee	1 to 11	6	OFDM	BPSK
	1 to 16	1	O-QPSK	O-QPSK

#### Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
WLAN + ZigBee	1 to 11	6	OFDM	BPSK
	1 to 16	1	O-QPSK	O-QPSK

#### Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
WLAN + ZigBee	1 to 11	6	OFDM	BPSK
	1 to 16	1	O-QPSK	O-QPSK



A D T

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE <sup>3</sup> 1G	25deg. C, 73%RH, 1013 hPa	120Vac, 60Hz	Rex Huang
RE<1G	21deg. C, 70%RH, 1013 hPa	120Vac, 60Hz	Eric Lee
PLC	28deg. C, 60%RH, 1015 hPa	120Vac, 60Hz	Timmy Hu



### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
4	TELEPHONE	WONDER	WD-303	6C17FA00515	NA
5	TELEPHONE	WONDER	WD-303	6C17FA00774	NA
6	iPod	Apple	A1137	6U6078FMUPR	FCC DoC
7	iPod	Apple	A1137	5K7170JBUPR	FCC DoC

No.	Signal cable description
1	10 m UTP cable.
2	10 m UTP cable.
3	10 m UTP cable.
4	2.0 m wrapped unshielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.
5	2.0 m wrapped unshielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.
6	1.0 m shielded cable, terminated with USB connector, w/o core.
7	1.0 m shielded cable, terminated with USB connector, w/o core.

Note: 1. All power cords of the above support units are unshielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

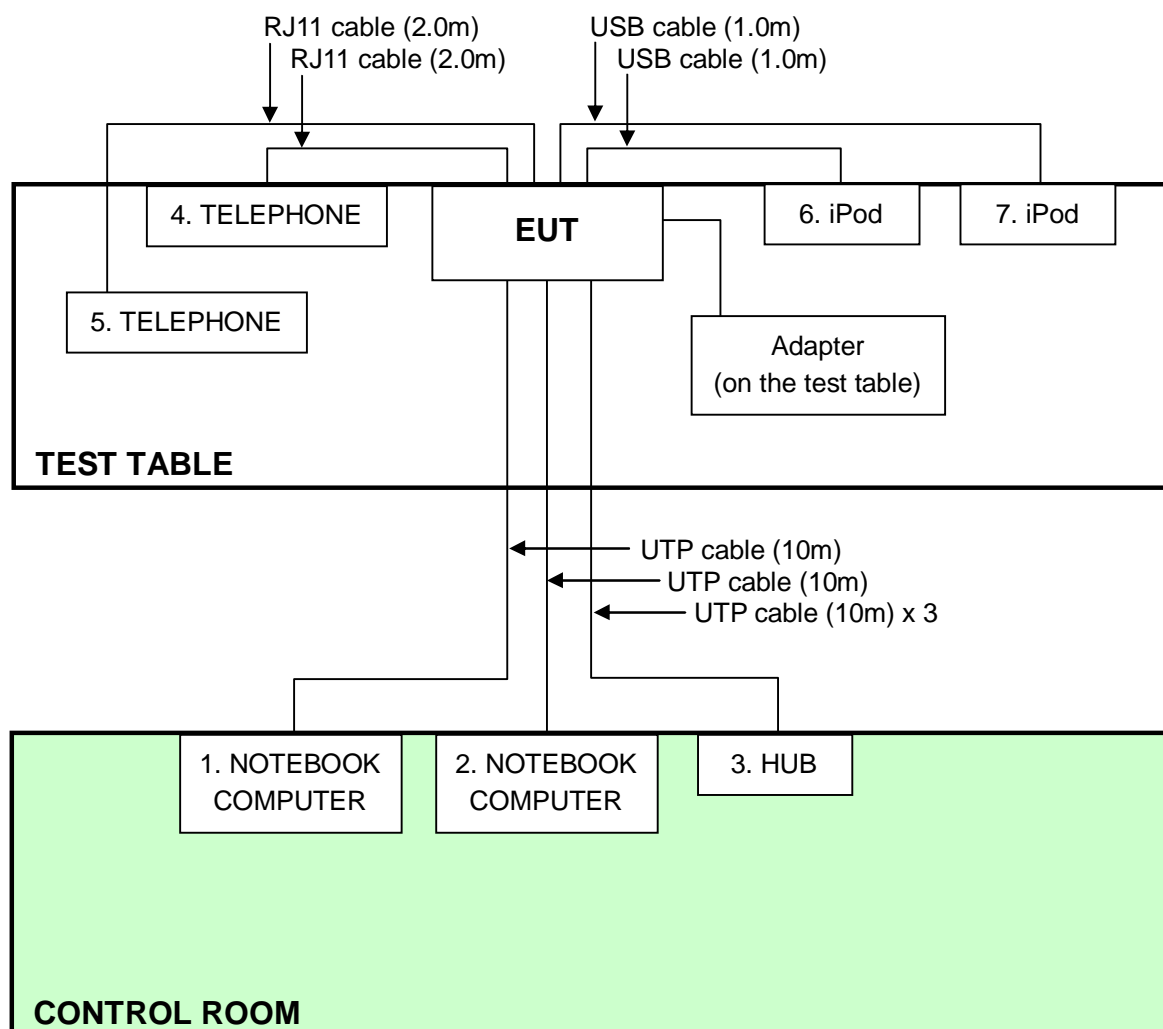

## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Test date: Oct. 14, 2010

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2010	Mar. 08, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-522	Sep. 08, 2010	Sep. 07, 2011
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Oct. 26, 2009	Oct. 25, 2010
RF Cable (JYEBAO)	5DFB	COBCAB-001	Nov. 24, 2009	Nov. 23, 2010
50 ohms Terminator	50	3	Oct. 28, 2009	Oct. 27, 2010
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.


### 4.1.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

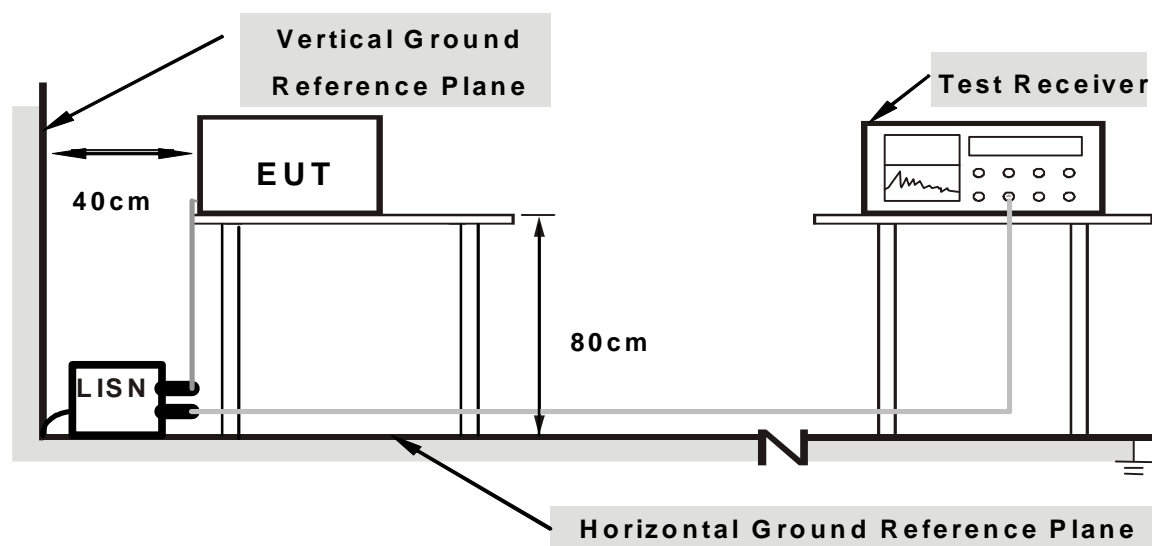

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

#### 4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 2) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “WiFi Broadcom wl command” & “Zigbee Telnet command” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cables.




#### 4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	9.73	43.24	-	52.97	-	64.43	54.43	-11.46	-
2	0.248	9.74	33.72	-	43.46	-	61.83	51.83	-18.37	-
3	0.302	9.75	34.13	-	43.88	-	60.18	50.18	-16.31	-
4	0.517	9.75	24.25	-	34.00	-	56.00	46.00	-22.00	-
5	2.715	9.78	23.25	-	33.03	-	56.00	46.00	-22.97	-
6	3.508	9.79	23.52	-	33.31	-	56.00	46.00	-22.69	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

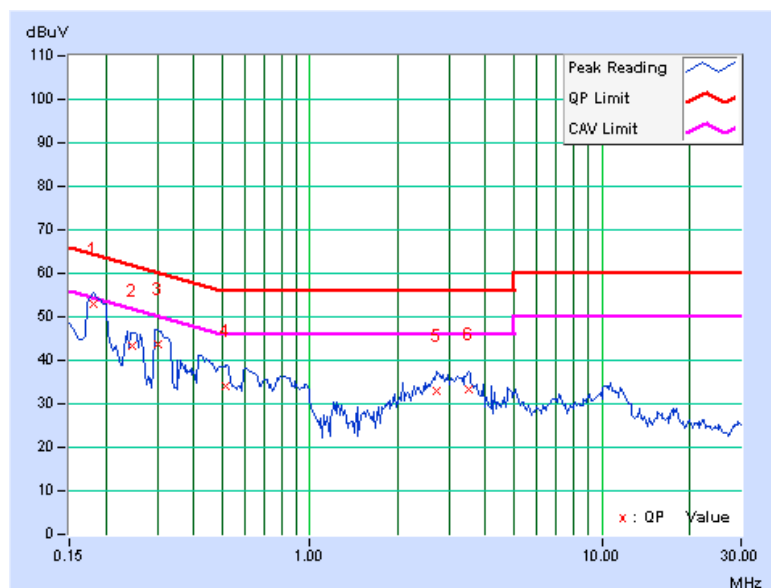

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	9.73	43.19	-	52.92	-	64.42	54.42	-11.50	-
2	0.248	9.74	33.72	-	43.46	-	61.84	51.84	-18.38	-
3	0.310	9.75	31.35	-	41.10	-	59.96	49.96	-18.87	-
4	0.912	9.76	21.56	-	31.32	-	56.00	46.00	-24.68	-
5	3.199	9.79	23.88	-	33.67	-	56.00	46.00	-22.33	-
6	4.156	9.81	22.79	-	32.60	-	56.00	46.00	-23.40	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

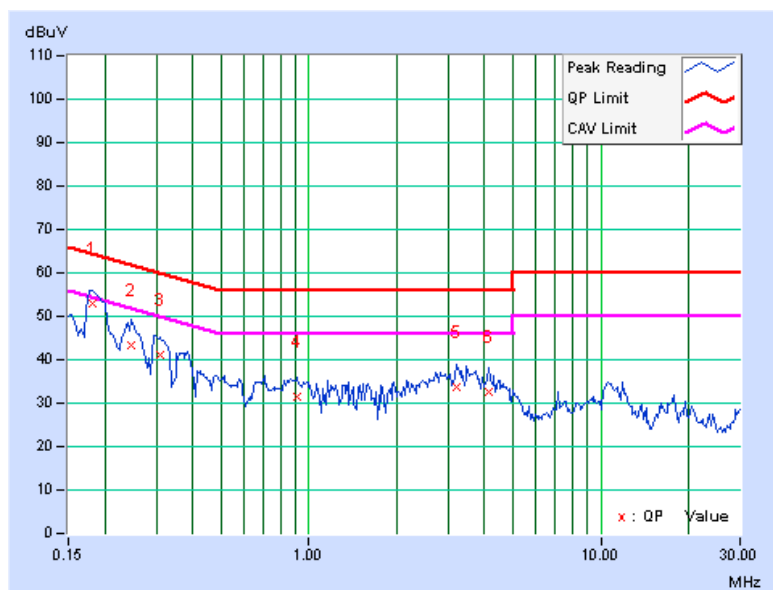

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

## 4.2.2 TEST INSTRUMENTS

For below 1GHz test, tested data: Oct. 26

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 23, 2010	Aug. 22, 2011
Agilent Pre-Selector	N9039A	MY46520310	Aug. 23, 2010	Aug. 22, 2011
Agilent Signal Generator	N5181A	MY49060347	July 30, 2010	July 29, 2011
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 18, 2009	Nov. 17, 2010
Agilent Pre-Amplifier	8449B	3008A02465	Mar. 01, 2010	Feb. 28, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 28, 2010	Apr. 27, 2011
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 16, 2009	Nov. 15, 2010
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-208	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHHCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.



A D T

For above 1GHz test, tested data: Oct. 25

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 14, 2010	July 13, 2011
Agilent Pre-Selector	N9039A	MY46520311	July 14, 2010	July 13, 2011
Agilent Signal Generator	N5181A	MY49060517	July 14, 2010	July 13, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 18, 2009	Nov. 17, 2010
Agilent Pre-Amplifier	8449B	3008A02578	July 05, 2010	July 04, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 29, 2010	Apr. 28, 2011
AISI Horn_Antenna	AIH.8018	000032009111 0	Nov. 16, 2009	Nov. 15, 2010
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
3. The test was performed in 966 Chamber No. G.  
4. The FCC Site Registration No. is 966073.  
5. The VCCI Site Registration No. is G-137.  
6. The CANADA Site Registration No. is IC 7450H-2.


#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site for below 1GHz test and at a 3 meters chamber room for above 1GHz test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

## 4.2.4 TEST SETUP

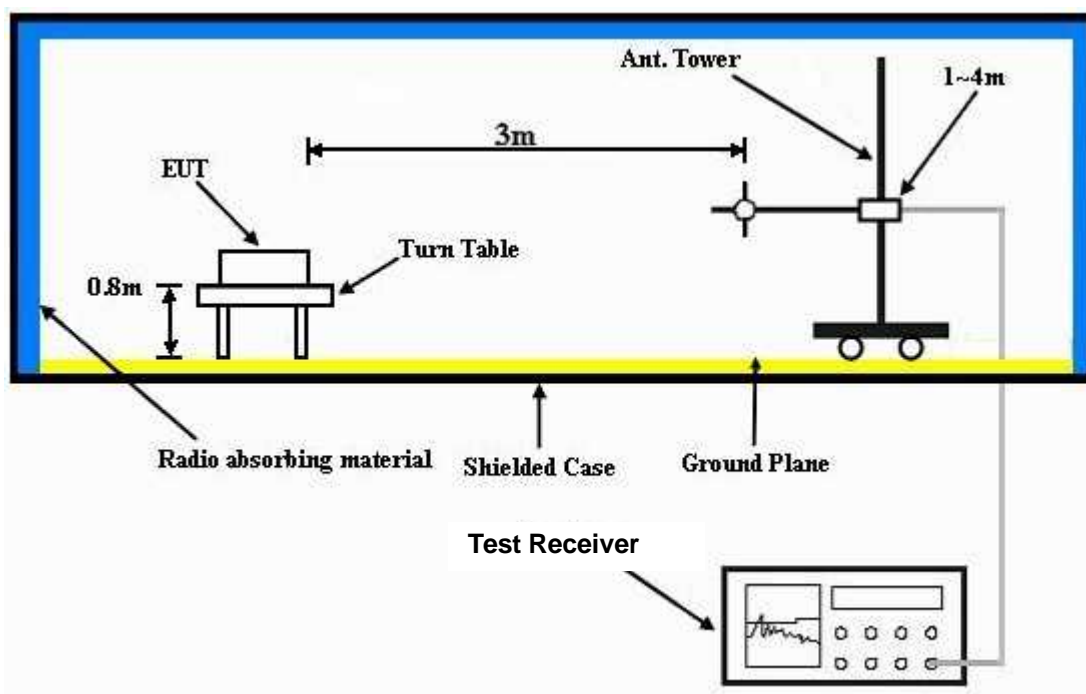

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

## 4.2.6 TEST RESULTS

## BELOW 1GHz WORST-CASE DATA :

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH 1015hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Eric Lee		

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	101.41	31.98 QP	43.50	-11.52	1.50 H	0	21.82	10.16
2	124.97	34.00 QP	43.50	-9.50	1.50 H	101	20.87	13.13
3	184.19	35.80 QP	43.50	-7.70	1.00 H	360	23.41	12.39
4	250.03	37.24 QP	46.00	-8.76	1.00 H	263	24.29	12.95
5	270.99	37.29 QP	46.00	-8.71	1.00 H	81	23.52	13.77
6	374.97	35.24 QP	46.00	-10.76	1.00 H	69	18.06	17.18
7	750.01	39.62 QP	46.00	-6.38	1.00 H	347	15.34	24.28

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.87	38.37 QP	40.00	-1.63	1.00 V	151	24.32	14.05
2	83.29	34.73 QP	40.00	-5.27	2.00 V	101	24.96	9.77
3	105.08	33.77 QP	43.50	-9.73	1.00 V	17	23.09	10.68
4	204.32	34.08 QP	43.50	-9.42	1.00 V	105	22.72	11.36
5	374.97	36.79 QP	46.00	-9.21	1.00 V	360	19.61	17.18
6	843.80	38.60 QP	46.00	-7.40	1.00 V	259	12.78	25.82
7	875.06	38.21 QP	46.00	-7.79	1.00 V	360	11.92	26.29

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.





A D T

#### 4.2.7 TEST RESULTS

##### Above 1GHz WORST-CASE DATA :

EUT TEST CONDITION		MEASUREMENT DETAIL	
INPUT POWER	120Vac, 60 Hz	FREQUENCY RANGE	1 ~ 25GHz
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH 1015hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY	Rex Huang		

##### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4810.00	51.10 PK	74.00	-22.90	1.09 H	76	12.18	38.92
2	4810.00	26.10 AV	54.00	-27.90	1.09 H	76	-12.82	38.92
3	4874.00	46.10 PK	74.00	-27.90	1.47 H	192	6.96	39.14
4	4874.00	34.70 AV	54.00	-19.30	1.47 H	192	-4.44	39.14
5	7311.00	53.50 PK	74.00	-20.50	1.21 H	263	6.87	46.63
6	7311.00	41.10 AV	54.00	-12.90	1.21 H	263	-5.53	46.63

##### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4810.00	46.20 PK	74.00	-27.80	1.00 V	296	7.28	38.92
2	4810.00	21.20 AV	54.00	-32.80	1.00 V	296	-17.72	38.92
3	4874.00	45.50 PK	74.00	-28.50	1.03 V	126	6.36	39.14
4	4874.00	34.90 AV	54.00	-19.10	1.03 V	126	-4.24	39.14
5	7311.00	54.90 PK	74.00	-19.10	1.38 V	156	8.27	46.63
6	7311.00	42.10 AV	54.00	-11.90	1.38 V	156	-4.53	46.63

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**--- END ---**