
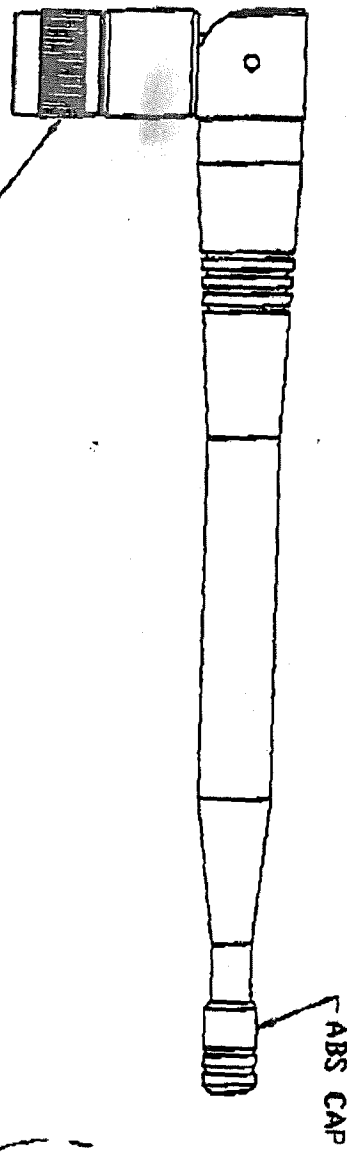


Dipole

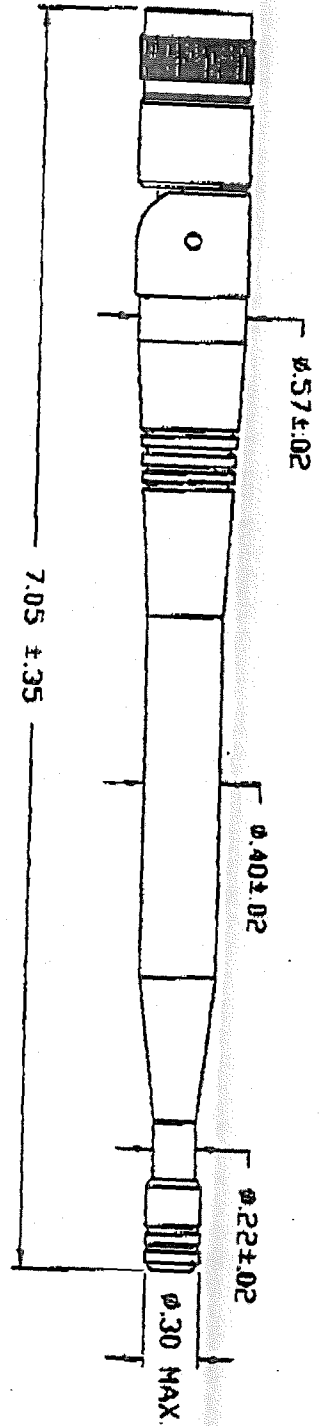


APPROVED
JUL 31 1996

NOTES:

- 1 SPECIFICATIONS:
GAIN: 215dbi
OPERATING TEMPERATURE: -40°C TO +85°C
FLEX TEST, PER OEAD014
PULL TEST: 20 lbs LINEAR PULL
TORQUE TEST: 20 in-lbs
POWER RATING: 50 WATTS
VSWR (S) MAX. AT RESONANCE

2 CENTURION	FREQ.	FREQ.	COLOR
PART NO.	CODE	RANGE	CODE
CAF28711	2.4GHZ	2.4GHZ	NONE

INSULATOR/CONTACT PLACEMENT

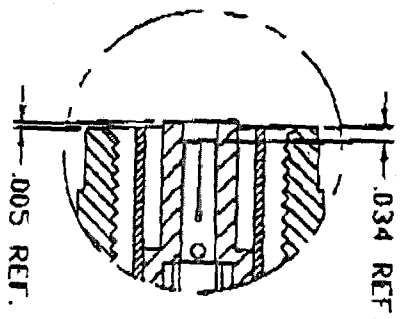

ALL DIMENSIONS ARE IN INCHES

LET	REVISION	DATE	CK	APP	SCALE	TOL. UNLESS NOTED
F	EC0951305	10/95	EJC	CBF	2:1	.XX = ± .010
G	EC0962801	03/96	CBP	DV		.XXX = ± .005
H	EC096345	03/96	CBP	DV		ANGULAR ± .30°
J	EC096614	06/96	CBP	DV		
K	EC096719	07/96	CBP	DV		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS OF A PROPRIETARY NATURE. IT MAY NOT BE REPRODUCED OR USED WITHOUT EXPRESS WRITTEN PERMISSION OF CENTURION INTERNATIONAL INC. LINCOLN, NEBRASKA

CONFIDENTIAL

DATE:	DWG. NO.:	PAGE:	REV.
03/22/94	CAF28711	1/5	X

CENTURION INT. INC.
ANTICELL, ST/RA, 2400MHZ, TNSP
MATERIAL: N/A

PA 402-467-4491
PD Bx 226450
LINCOLN, NE 68501