



## **Test Report**

# **AIR-RM1520-58-A-K9**

## **Cisco Aironet 802.11n Draft 2.0 Radio Module**

**5725-5850 MHz**

### **Class II Permissive Change**

**FCC ID: LDK102068, IC: 2461B-102068**

**Against the following Specifications:**

**CFR47 Part 15.247**

**RSS210**

**Cisco Systems**

170 West Tasman Drive

San Jose, CA 95134

**Author:** James Nicholson

**Approved By:**

**Title:**

This report replaces any previously entered test report under EDCS - 674057



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

**SECTION 1: OVERVIEW .....3**

**1.1 TEST SUMMARY .....3**

**SECTION 2: ASSESSMENT INFORMATION.....4**

**2.1 GENERAL .....4**

**2.4 TESTING FACILITIES .....5**

**2.6 EUT DESCRIPTION.....5**

**SECTION 4: SAMPLE DETAILS.....6**

**APPENDIX A: EMISSION TEST RESULTS .....7**

**APPENDIX B: EMISSION TEST RESULTS .....29**

**MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....51**

**APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST.....53**



## Section 1: Overview

### 1.1 Test Summary

samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

#### Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
  - Temperature 15°C to 35°C (54°F to 95°F)
  - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
  - Humidity 10% to 75\*%

\*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
  - 110V 60 Hz (+/-20%)
  - 220V 50 Hz (+/-20%)

**This report must not be reproduced except in full, without written approval of Cisco Systems.**



## 2.2 Date of start of testing

03-November-2008

## 2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

## 2.4 Testing facilities

This assessment was performed by:

### Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

### Test Engineers

James Nicholson

## 2.5 Equipment Assessed (EUT)

AIR-RM1520-58-A-K9 Cisco Aironet 802.11n Draft 2.0 Radio Module

## 2.6 EUT Description

The AIR-RM1520-58-A-K9 Cisco Aironet 802.11n Draft 2.0 Radio Module supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

This filing is a Class II change adding a 23 dBi integral Patch Array antenna, and 40MHz channelization as defined in IEEE 802.11n Draft 2.0, supporting the following modes:

Legacy OFDM, Non HT-20, Single Antenna, 6 to 54 Mbps  
HT-20, Single Antenna, M0 to M7  
HT-40, Single Antenna, M0 to M7

The following integral antennas are supported by this product.

AIR-ANT5180V-N	4900-5850 MHz 8.0 dBi Omni-directional
AIR-ANT58G10SSA-N	5725-5850 MHz 9.5 dBi Sector
AIR-ANT5114P-N	4900 -5850 MHz 14.0 dBi Patch
AIR-ANT5117S-N	4900 -5850 MHz 17.0 dBi 90-degree Sector
	5725-5850 MHz 23dBi Integral Patch Array
AIR-ANT58G28SDA-N	5725-5850 MHz 28 dBi Dish Antenna



#### Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

##### 4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-RM1520-58-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-LAP1520 Series Bridge Platform		Cisco Systems	NA	NA	NA	

##### 4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

##### 4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

**Appendix A: Emission Test Results****Testing Laboratory:** Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA**Average Output Power**

Connect the antenna to the power meter at the average power sensor input. Configure the power meter to measure average power for the transmitter frequencies listed below (enter all losses between the transmitter output and the power meter).

Place the radio in continuous transmit mode and record the reading on the power meter.

<b>Frequency (MHz)</b>	<b>Mode</b>	<b>Data Rate</b>	<b>Target Power Level (dBm)</b>	<b>Actual Power Level (dBm)</b>
5745	Non HT-20	6	28	<b>27.0</b>
5785	Non HT-20	6	28	<b>27.0</b>
5825	Non HT-20	6	28	<b>26.6</b>
5745/5765	HT-40	M0	26	<b>25.8</b>
5785/5805	HT-40	M0	26	<b>25.5</b>



## 6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 5725-5850MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	100 kHz
X dB Bandwidth:	6 dB
Detector:	Peak
Trace:	Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

Frequency (MHz)	Mode	Data Rate	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	Non HT-20	6	16.5	>500	16.0
5785	Non HT-20	6	16.5	>500	16.0
5825	Non HT-20	6	16.5	>500	16.0
5745/5765	HT-40	m0	35.9	>500	35.4
5785/5805	HT-40	m0	36.4	>500	35.9






6dB BANDWIDTH, 5745 MHz, 6 Mbps, Non HT-20

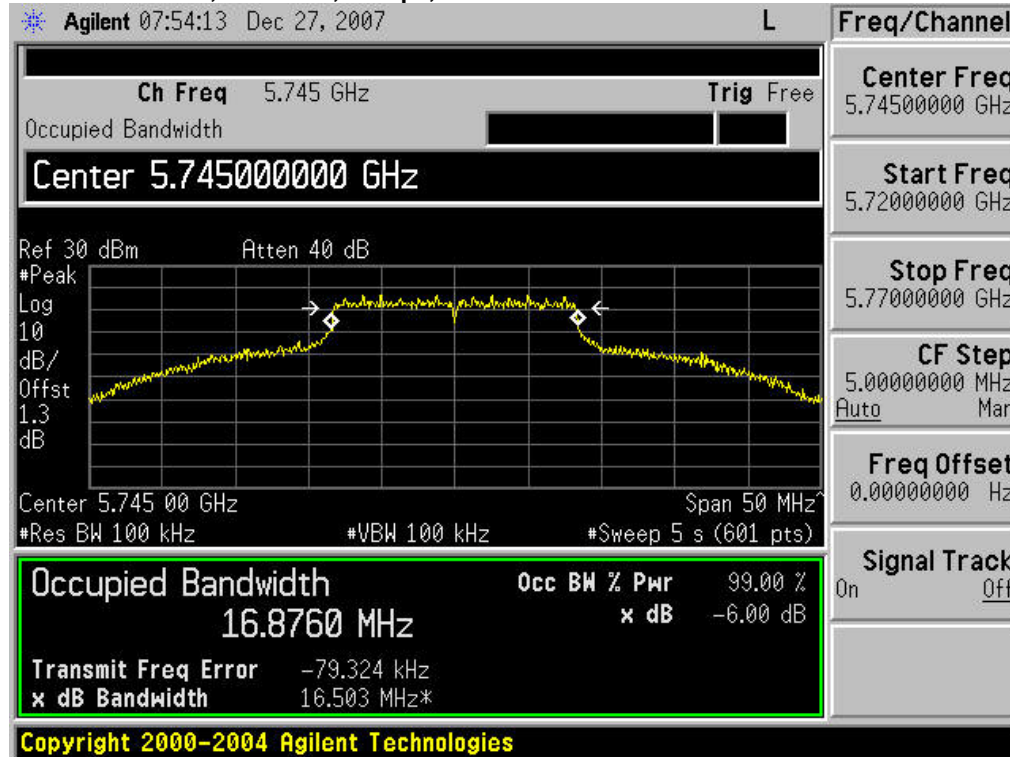

6dB BANDWIDTH, 5785 MHz, 6 Mbps, Non HT-20

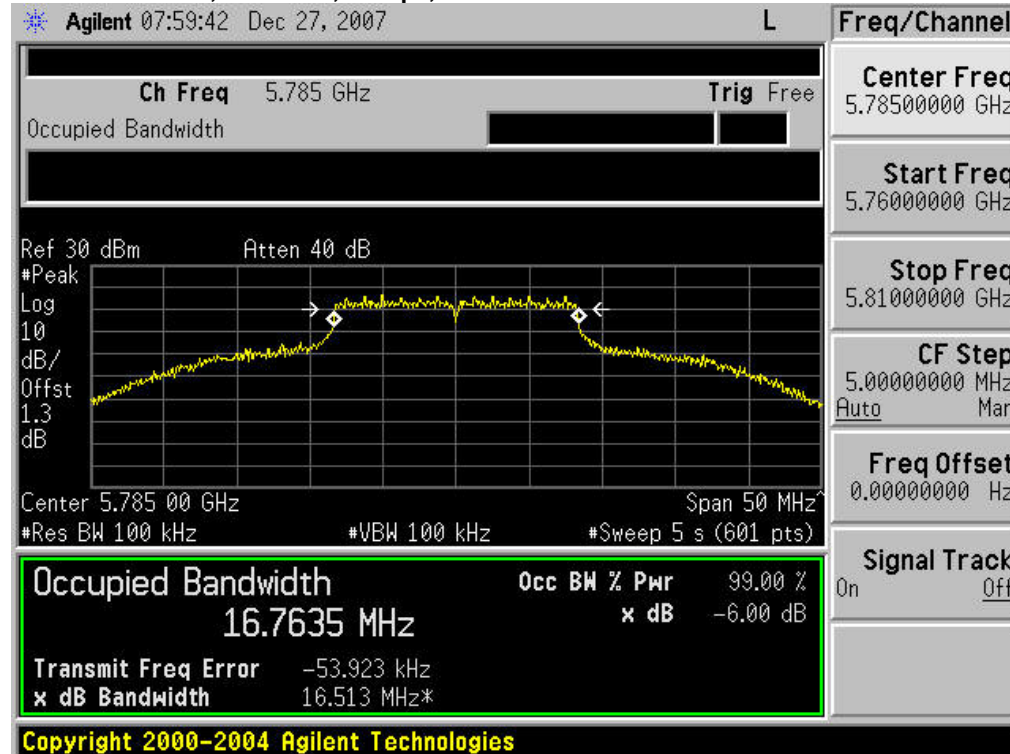



**6dB BANDWIDTH, 5825 MHz, 6 Mbps, Non HT-20**

Agilent 08:03:50 Dec 27, 2007 L

Ch Freq 5.825 GHz Trig Free

Center 5.82500000 GHz

Ref 30 dBm Atten 40 dB

#Peak Log 10 dB/Offst 1.3 dB

Center 5.825 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

**Occupied Bandwidth 16.6426 MHz**

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -21.588 kHz  
x dB Bandwidth 16.516 MHz\*

Copyright 2000-2004 Agilent Technologies

Freq/Channel	
Center Freq	5.82500000 GHz
Start Freq	5.80000000 GHz
Stop Freq	5.85000000 GHz
CF Step	5.00000000 MHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

**6dB BANDWIDTH, 5745/5765 MHz, m0, HT-40**

Agilent 06:33:49 Nov 4, 2008 R T

Ch Freq 5.755 GHz Trig Free

Center 5.755 00 GHz

Ref 30 dBm Atten 10 dB

#Peak Log 10 dB/Offst 30.8 dB

Center 5.755 00 GHz Span 80 MHz

#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

**Occupied Bandwidth 36.0586 MHz**

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -90.408 kHz  
x dB Bandwidth 35.902 MHz\*

Copyright 2000-2007 Agilent Technologies

Sweep	
Sweep Time	5.000 s Auto Man
Sweep	Single Cont
Auto Sweep Time	Norm Accy
Points	601



6dB BANDWIDTH, 5785/5805 MHz, m0, HT-40

Agilent 06:35:55 Nov 4, 2008 R T

Ch Freq 5.795 GHz Trig Free

Occupied Bandwidth

**Center 5.795000000 GHz**

Ref 30 dBm Atten 10 dB

#Peak

Log

10

dB/

Offst

30.8

dB

Center 5.795 00 GHz Span 80 MHz

#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
36.1429 MHz	x dB	-6.00 dB
<b>Transmit Freq Error</b>		-35.256 kHz
<b>x dB Bandwidth</b>		36.396 MHz*

Copyright 2000-2007 Agilent Technologies

<b>Freq/Channel</b>	<b>Center Freq</b> 5.79500000 GHz
<b>Start Freq</b>	5.75500000 GHz
<b>Stop Freq</b>	5.83500000 GHz
<b>CF Step</b>	8.00000000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off



## 99% and 26dB Bandwidth

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency: Frequency from table below  
 Span: 2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)  
 Reference Level: 20 dBm  
 Attenuation: 10 dB  
 Sweep Time: 5 s  
 Resolution Bandwidth: 1%-3% of 26 dB Bandwidth  
 Video Bandwidth: ≥Resolution Bandwidth  
 X dB Bandwidth: 26 dB  
 Detector: Peak  
 Trace: Single

Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

Frequency (MHz)	Mode	Data Rate	26dB BW (MHz)	99% BW (MHz)
5745	Non HT-20	6	30.9	17.0
5785	Non HT-20	6	31.3	17.0
5825	Non HT-20	6	29.1	16.8
5745/5765	HT-40	M0	46.2	36.1
5785/5805	HT-40	M0	42.6	36.1



99%/26 dB Bandwidth, 5745 MHz, 6 Mbps, Non HT-20

Agilent 08:26:21 Dec 27, 2007 L

Ch Freq 5.745 GHz Trig Free

Occupied Bandwidth

**Center 5.745000000 GHz**

Ref 30 dBm Atten 40 dB

#Peak Log 10 dB/Offst 1.3 dB

Center 5.745 00 GHz Span 50 MHz

#Res BW 160 kHz #VBW 470 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>16.9778 MHz</b>	x dB	-26.00 dB
Transmit Freq Error		-103.263 kHz
x dB Bandwidth		30.946 MHz*

Copyright 2000-2004 Agilent Technologies

Freq/Channel	
Center Freq	5.74500000 GHz
Start Freq	5.72000000 GHz
Stop Freq	5.77000000 GHz
CF Step	5.00000000 MHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

99%/26 dB BANDWIDTH, 5785 MHz, 6 Mbps, Non HT-20

Agilent 08:27:51 Dec 27, 2007 L

Ch Freq 5.785 GHz Trig Free

Occupied Bandwidth

**Center 5.785000000 GHz**

Ref 30 dBm Atten 40 dB

#Peak Log 10 dB/Offst 1.3 dB

Center 5.785 00 GHz Span 50 MHz

#Res BW 160 kHz #VBW 470 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>16.9616 MHz</b>	x dB	-26.00 dB
Transmit Freq Error		-112.771 kHz
x dB Bandwidth		31.317 MHz*

Copyright 2000-2004 Agilent Technologies

Freq/Channel	
Center Freq	5.78500000 GHz
Start Freq	5.76000000 GHz
Stop Freq	5.81000000 GHz
CF Step	5.00000000 MHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off



99%/26 dB BANDWIDTH, 5825 MHz, 6 Mbps, Non HT-20

Agilent 08:29:25 Dec 27, 2007 L

Ch Freq 5.825 GHz Trig Free

Occupied Bandwidth

Start 5.80000000 GHz

Ref 30 dBm Atten 40 dB

#Peak Log 10 dB/ Offst 1.3 dB

Start 5.800 00 GHz Stop 5.850 00 GHz

#Res BW 160 kHz #VBW 470 kHz #Sweep 5 s (601 pts)

**Occupied Bandwidth 16.7955 MHz** Occ BW % Pwr 99.00 % x dB -26.00 dB

Transmit Freq Error -24.176 kHz

x dB Bandwidth 29.148 MHz\*

Copyright 2000-2004 Agilent Technologies

Freq/Channel	
Center Freq	5.82500000 GHz
Start Freq	5.80000000 GHz
Stop Freq	5.85000000 GHz
CF Step	5.00000000 MHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

99%/26 dB BANDWIDTH, 5745/5765 MHz, m0, HT-40

Agilent 06:45:13 Nov 4, 2008 R T

Ch Freq 5.755 GHz Trig Free

Occupied Bandwidth

Ref 30 dBm Atten 10 dB

#Peak Log 10 dB/ Offst 30.8 dB

Center 5.755 00 GHz Span 80 MHz

#Res BW 160 kHz #VBW 470 kHz #Sweep 5 s (601 pts)

**Occupied Bandwidth 36.0619 MHz** Occ BW % Pwr 99.00 % x dB -26.00 dB

Transmit Freq Error -103.236 kHz

x dB Bandwidth 46.154 MHz\*

Copyright 2000-2007 Agilent Technologies

Sweep	
Sweep Time	5.000 s Auto Man
Sweep	Single Cont
Auto Sweep Time	Norm Accy
Points	601



99%/26 dB BANDWIDTH, 5785/5805 MHz, m0, HT-40

Agilent 06:40:05 Nov 4, 2008 R T

Ch Freq 5.795 GHz Trig Free

Occupied Bandwidth

Ref 30 dBm Atten 10 dB

#Peak

Log

10

dB/

Offst

30.8

dB

Center 5.795 00 GHz Span 80 MHz

#Res BW 160 kHz #VBW 470 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
36.1289 MHz	x dB	-26.00 dB
<b>Transmit Freq Error</b>		-43.116 kHz
<b>x dB Bandwidth</b>		42.642 MHz*

Copyright 2000-2007 Agilent Technologies

**Sweep**

**Sweep Time** 5.000 s

Auto Man

**Sweep**

Single Cont

**Auto Sweep Time**

Norm Accy

**Points**

601





## Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 5725-5850MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

The maximum supported non-point to point antenna gain is 8dBi, therefore the maximum conducted output power must be reduced by 8dBi-6dBi=2dB, or a maximum of 30dBm-2dBm=28dBm.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer  
 Center Frequency: Frequency from table below  
 Span: 20 MHz (must be greater than 26dB bandwidth, adjust as necessary)  
 Ref Level Offset: Correct for attenuator and cable loss.  
 Reference Level: 20 dBm  
 Attenuation: 20 dB  
 Sweep Time: 100ms, Single sweep  
 Resolution Bandwidth: 1 MHz  
 Video Bandwidth: 3 MHz  
 Detector: Sample  
 Trace: Trace Average 100 traces in Power Averaging Mode  
 Integration BW: =26 dB BW from 26 dB Bandwidth Data


After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

Frequency (MHz)	Mode	Data Rate	Peak Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20	6	27.5	28	0.5
5785	Non HT-20	6	27.3	28	0.7
5825	Non HT-20	6	27.0	28	1
5745/5765	HT-40	m0	25.7	28	2.3
5785/5805	HT-40	m0	25.4	28	2.6






**Peak Power, 5745 MHz, 6 Mbps, Non HT-20**

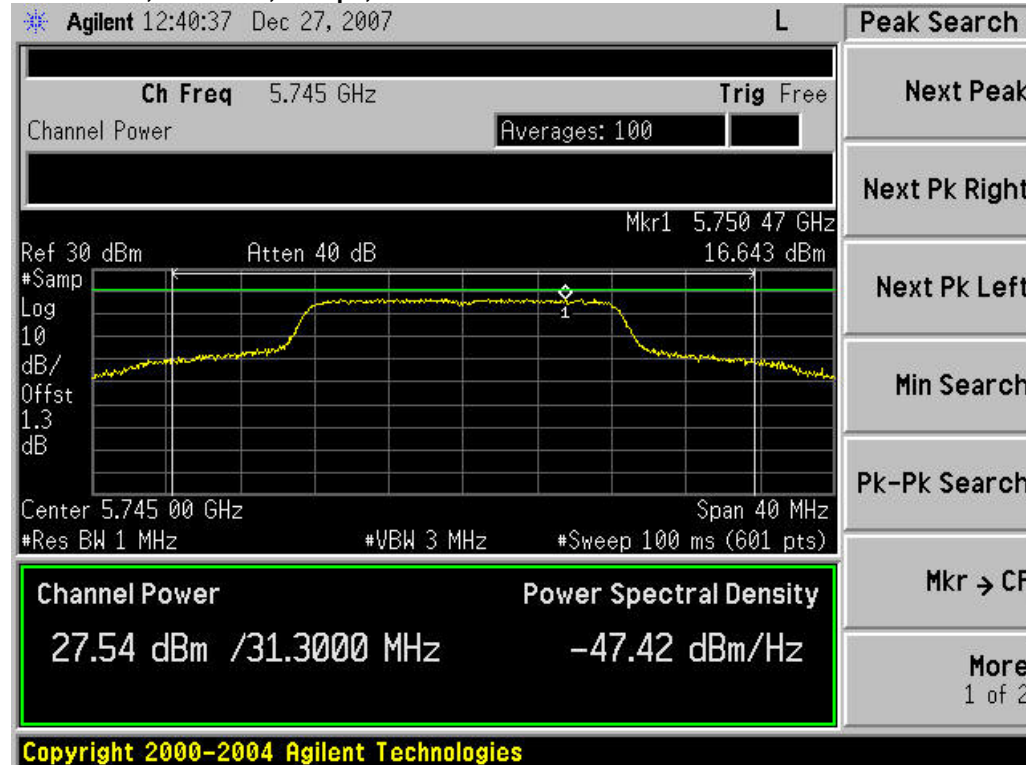

**Peak Power, 5785 MHz, 6 Mbps, Non HT-20**

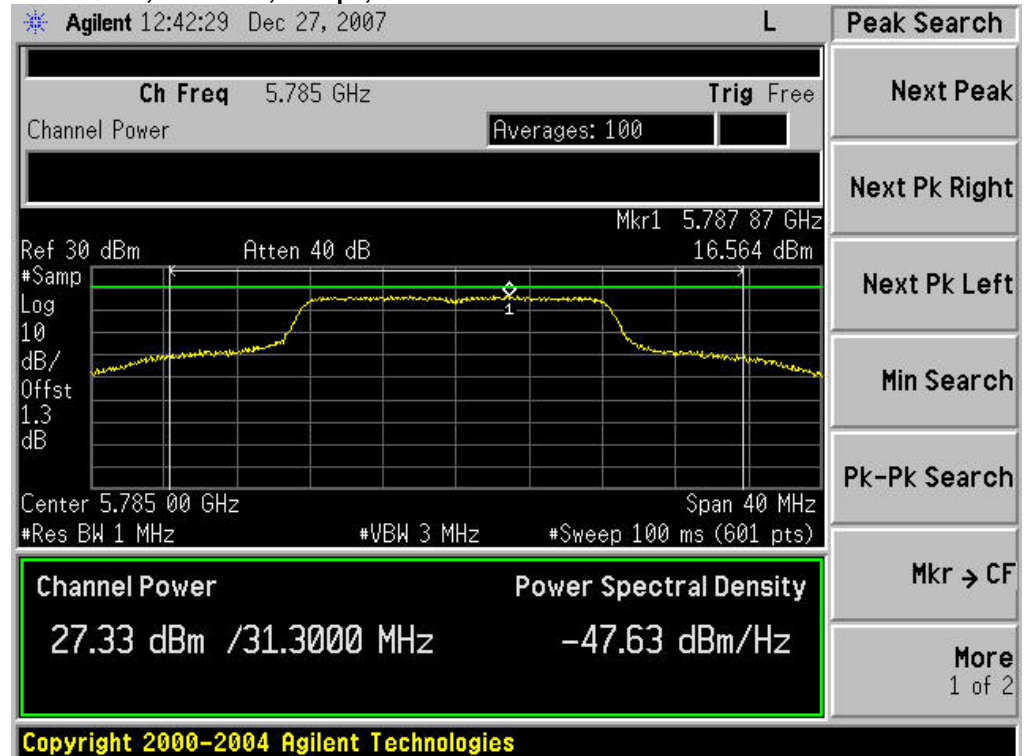



**Peak Power, 5825 MHz, 6 Mbps, Non HT-20**

Agilent 12:44:14 Dec 27, 2007 L

Ch Freq 5.825 GHz Trig Free

Channel Power Averages: 100

Ref 30 dBm Atten 40 dB Mkr1 5.820 07 GHz 16.608 dBm

#Samp Log 10 dB/ Offst 1.3 dB

Center 5.825 00 GHz Span 40 MHz

#Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)

Channel Power Power Spectral Density

27.01 dBm /31.3000 MHz -47.95 dBm/Hz

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

PK-Pk Search

Mkr → CF

More 1 of 2

Copyright 2000-2004 Agilent Technologies

**Peak Power, 5745/5765 MHz, m0, HT-40**

Agilent 06:53:47 Nov 4, 2008 R T

Ch Freq 5.755 GHz Trig Free

Channel Power Averages: 100

Ref 30 dBm Atten 10 dB

#Samp Log 10 dB/ Offst 30.8 dB

Center 5.755 00 GHz Span 80 MHz

#Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (601 pts)

Channel Power Power Spectral Density

25.70 dBm /46.0000 MHz -50.92 dBm/Hz

Freq/Channel

Center Freq 5.75500000 GHz

Start Freq 5.71500000 GHz

Stop Freq 5.79500000 GHz

CF Step 8.00000000 MHz Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Copyright 2000-2007 Agilent Technologies



**Peak Power, 5785/5805 MHz, m0, HT-40**

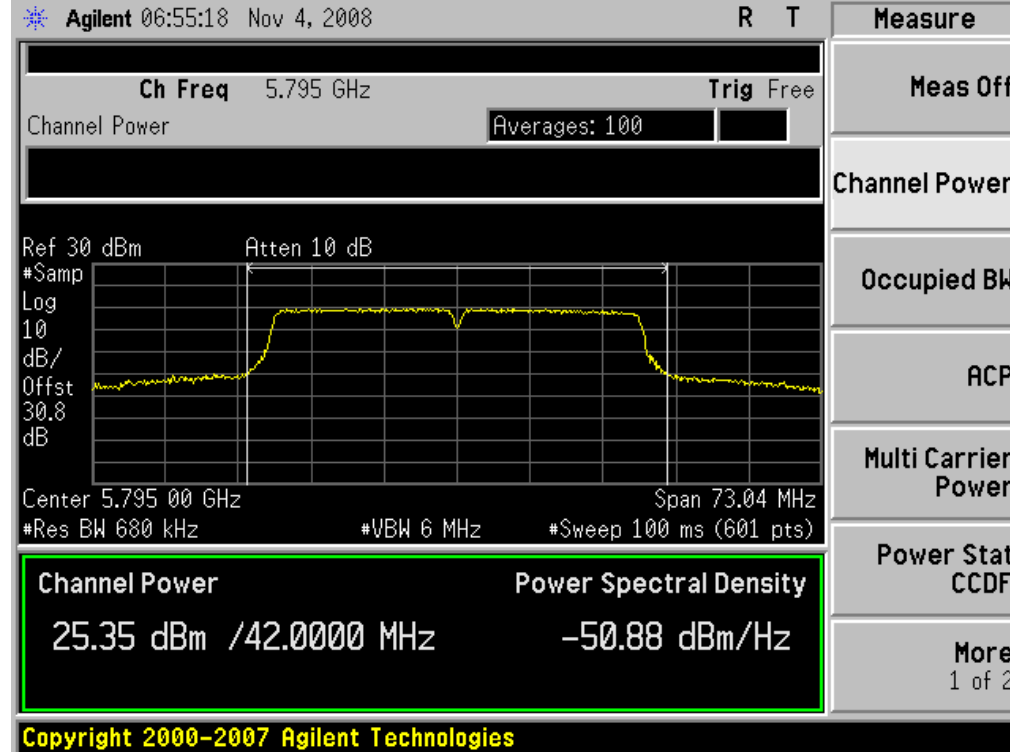



## Power Spectral Density

15.247: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.


Center Frequency: Frequency from table below  
Span: 20 MHz  
Ref Level Offset: Correct for attenuator and cable loss.  
Reference Level: 20 dBm  
Attenuation: 20 dB  
Sweep Time: 100s  
Resolution Bandwidth: 3 kHz  
Video Bandwidth: 10 kHz  
Detector: Peak  
Trace: Single  
Marker: Peak Search

Record the Marker value.


Frequency (MHz)	Mode	Data Rate (Mbps)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
5745	Non HT-20	6	2.2	8	5.8
5785	Non HT-20	6	2.1	8	5.9
5825	Non HT-20	6	1.7	8	6.3
5745/5765	HT-40	m0	-2.7	8	10.67
5785/5805	HT-40	m0	-3.3	8	11.3



**Power Spectral Density, 5745 MHz, 6 Mbps, Non HT-20**

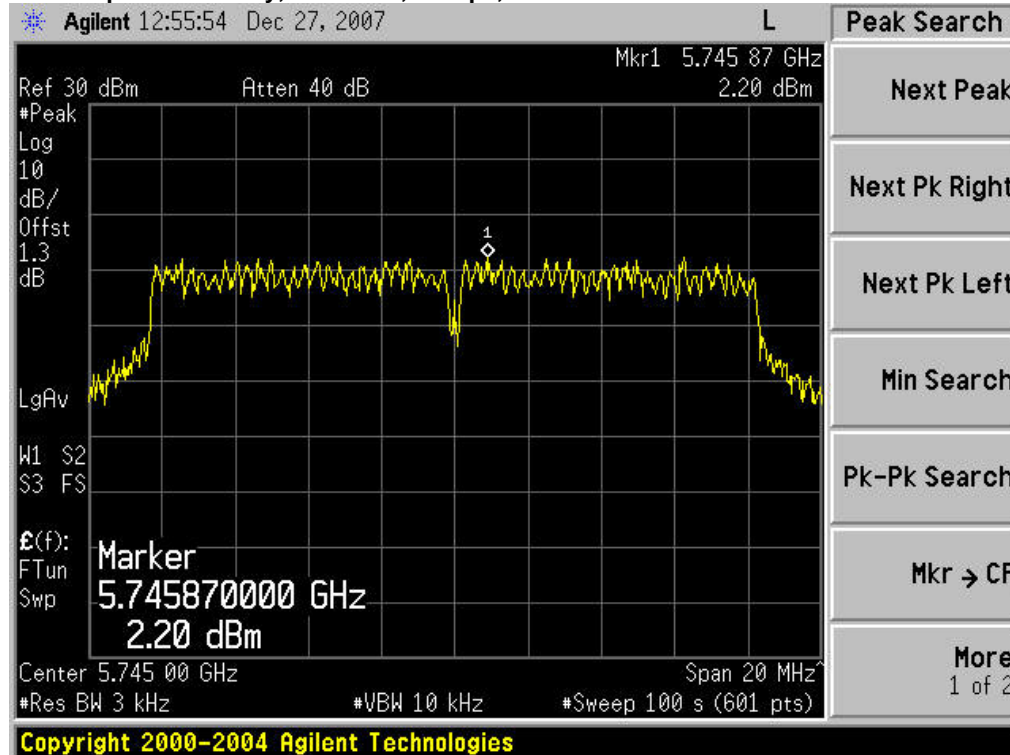


**Power Spectral Density, 5785 MHz, 6 Mbps, Non HT-20**

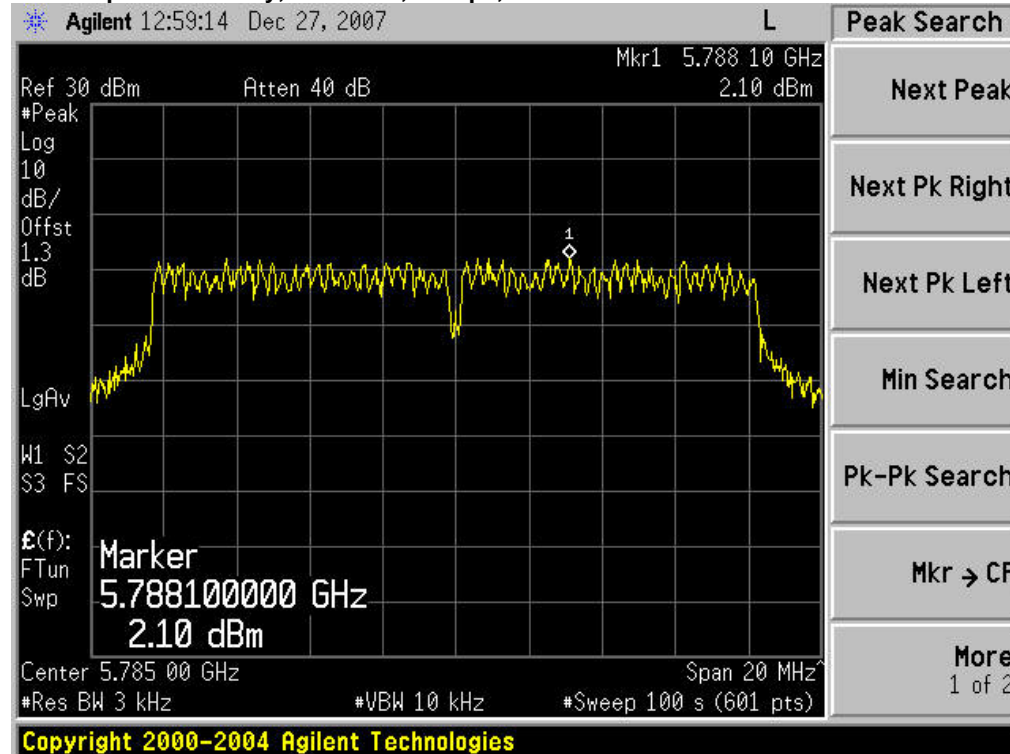




**Power Spectral Density, 5825 MHz, 6 Mbps, Non HT-20**

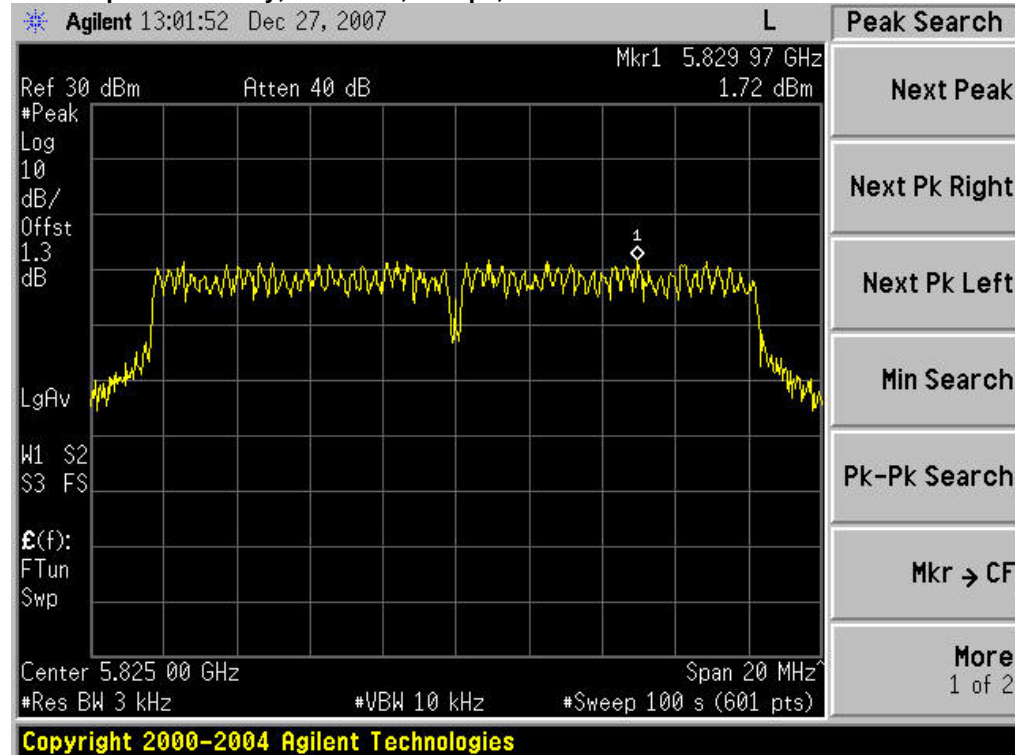


**Power Spectral Density, 5745/5765 MHz, m0, HT-40**

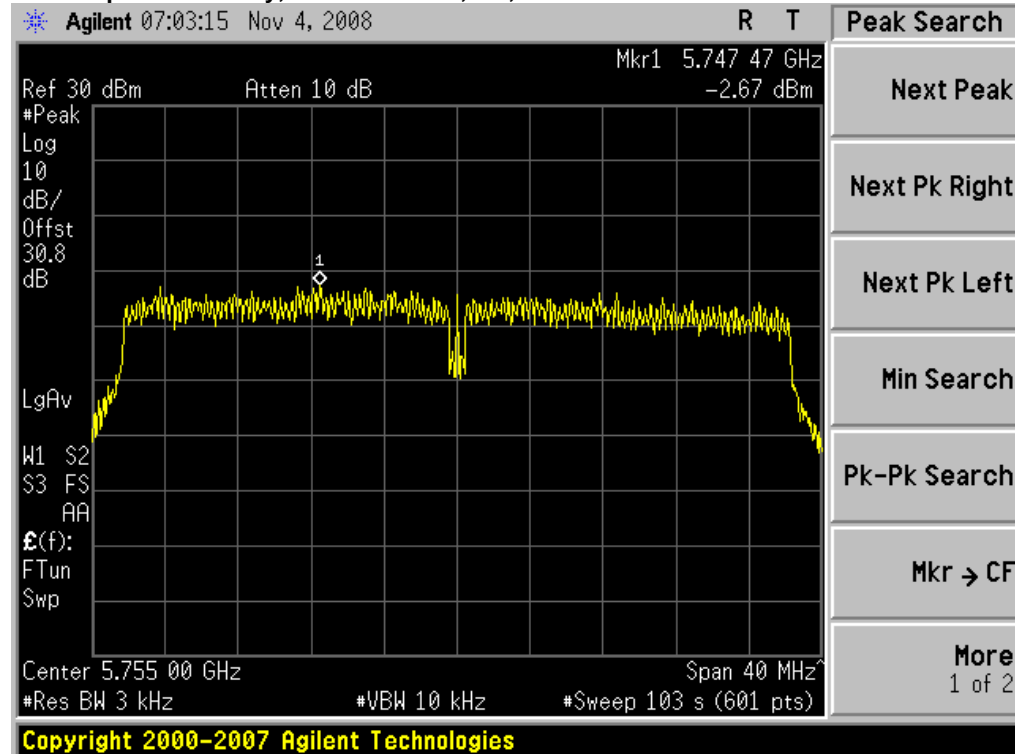



**Power Spectral Density, 5785/5805 MHz, m0, HT-40**

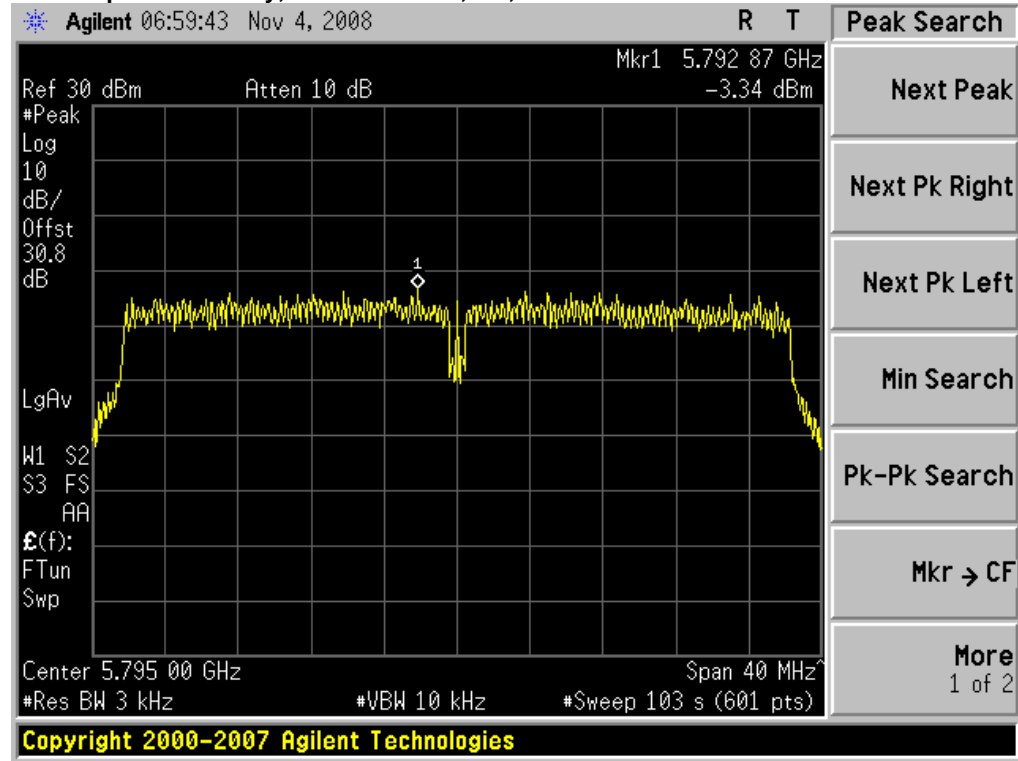



## Conducted Spurious Emissions

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-40 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak


Record the marker waveform peak to spur difference

Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Spurs
5745	Non HT-20	6	>30 dBc
5785	Non HT-20	6	>30 dBc
5825	Non HT-20	6	>30 dBc
5745/5765	HT-40	m0	>30 dBc
5785/5805	HT-40	m0	>30 dBc






**Conducted Spurs, 5745 MHz, 6 Mbps, Non HT-20**

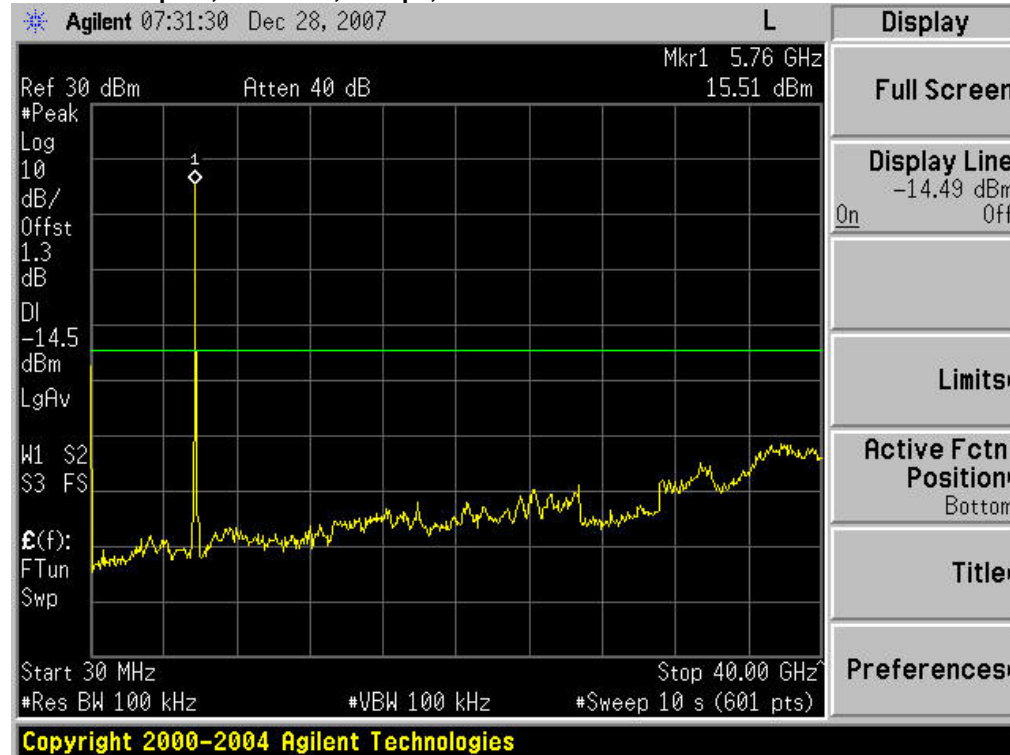


**Conducted Spurs, 5785 MHz, 6 Mbps, Non HT-20**

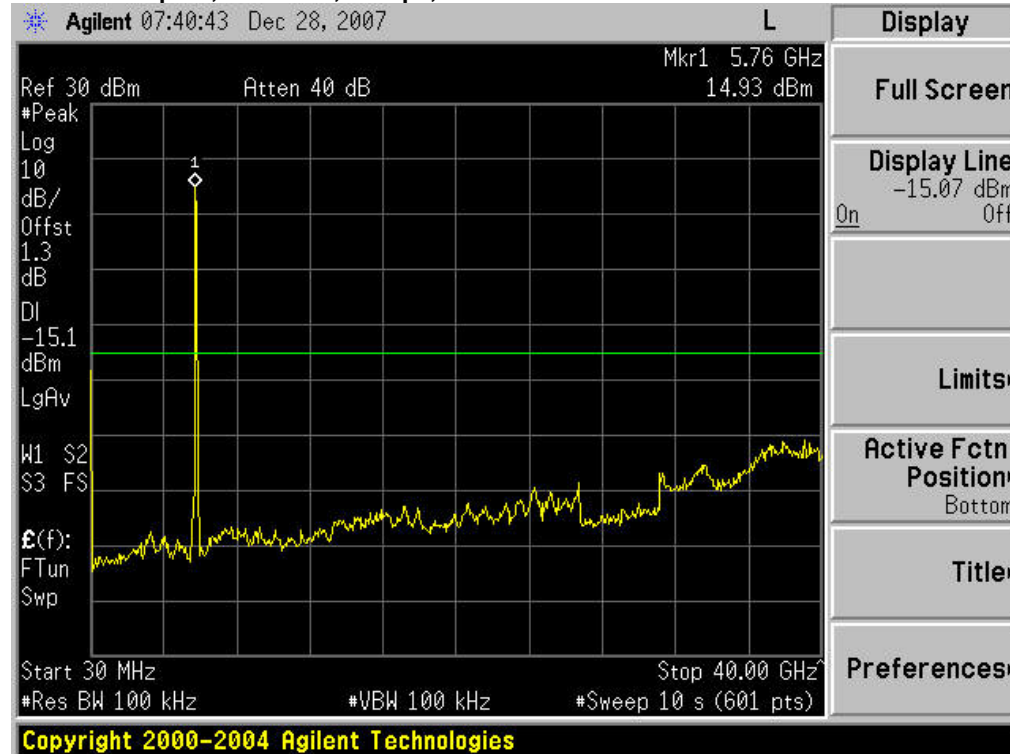




**Conducted Spurs, 5825 MHz, 6 Mbps, Non HT-20**

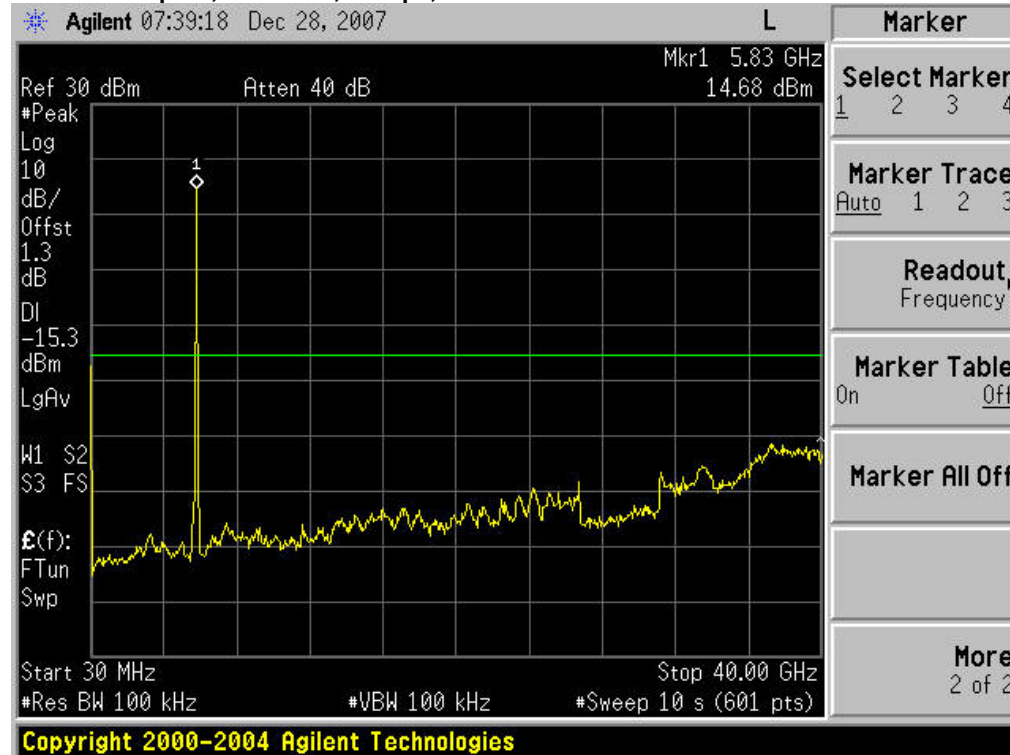



**Conducted Spurs, 5745/5765 MHz, m0, HT-40**

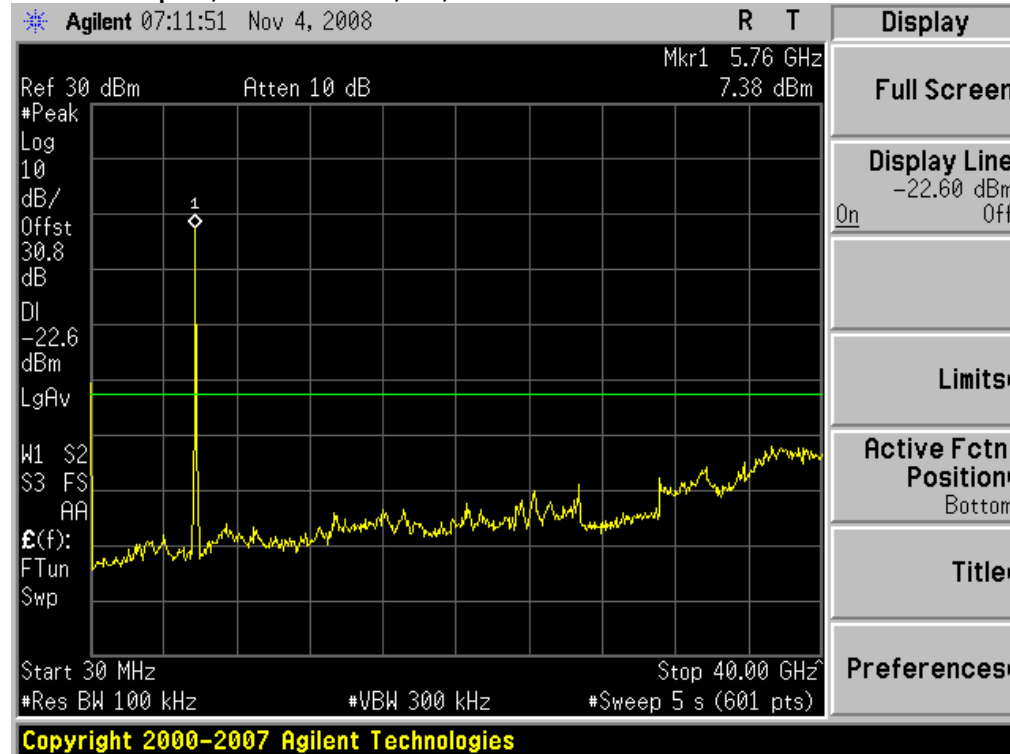



**Conducted Spurs, 5785/5805 MHz, m0, HT-40**

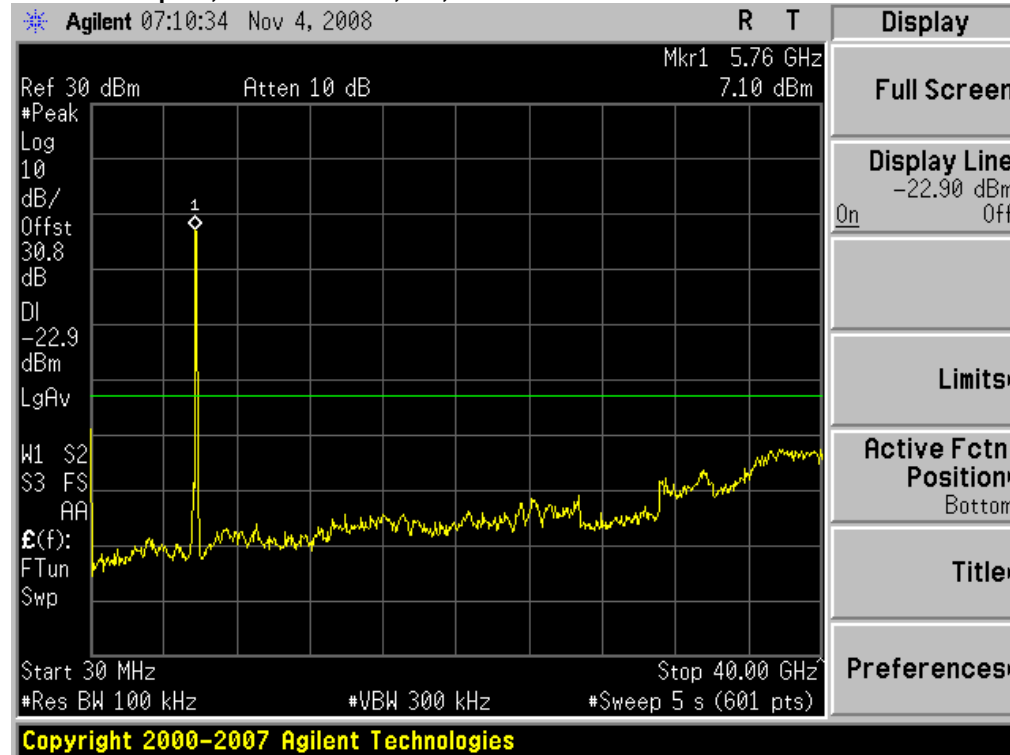

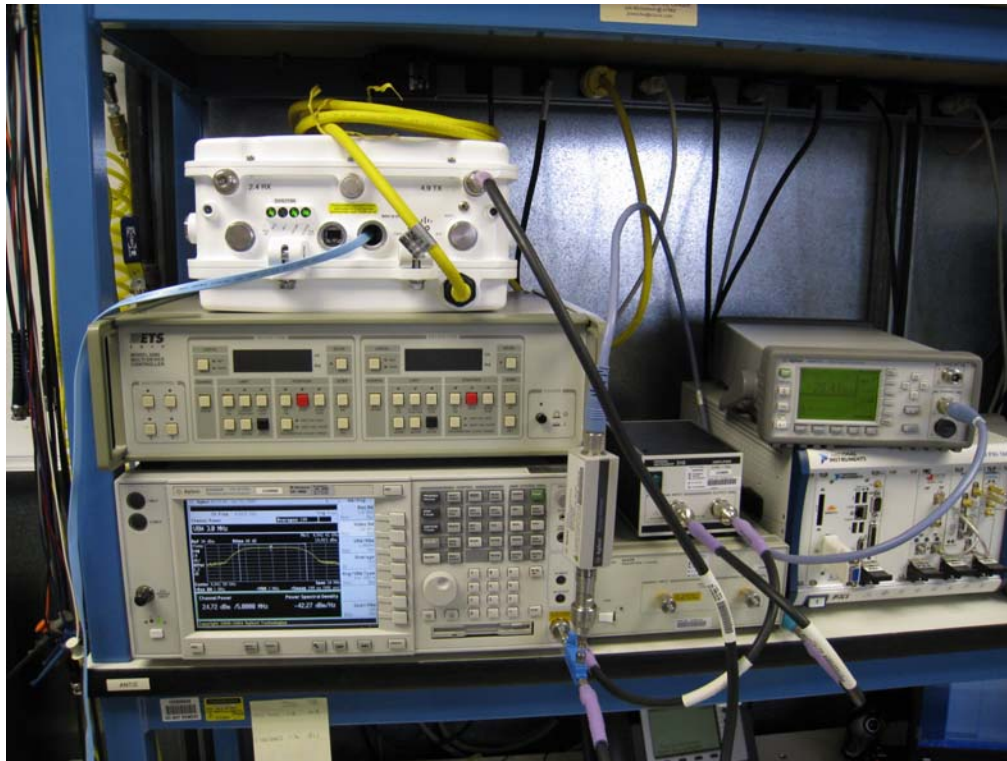



**Appendix B: Emission Test Results**

**Testing Laboratory:** Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

**Radiated Bandedge**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 5350-5745 MHz for 5745MHz test, (Measure 5725MHz Horz & Vert)  
 5805-6500 MHz for 5805MHz test, (Measure 5850MHz Horz & Vert)  
 Reference Level: 110 dBuV  
 Attenuation: 20 dB  
 Sweep Time: Coupled  
 Resolution Bandwidth: 1MHz  
 Video Bandwidth: 1 MHz for peak, 10 Hz for average  
 Detector: Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m  
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m


Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The following data represents the worst case emissions for all operating modes. There were no measurable emissions above 18GHz.


Frequency (MHz)	Mode	Data Rate (Mbps)	Radiated Band Edge Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5745	Non HT-20 (23dBi Ant)	6	46.9	68	21.1
5825	Non HT-20 (23dBi Ant)	6	51.6	68	16.4
5745/5765	HT-40 (23dBi Ant)	m0	46.7	68	21.3
5785/5805	HT-40 (23dBi Ant)	m0	51.6	68	16.4
5745	Non HT-20 (28dBi Ant)	6	58.4	68	9.6
5825	Non HT-20 (28dBi Ant)	6	62.3	68	5.7
5745/5765	HT-40 (28dBi Ant)	m0	54.9	68	13.1
5785/5805	HT-40 (28dBi Ant)	m0	60.3	68	7.7



**Radiated Bandedge, 5745 MHz, 6 Mbps, Non HT-20, 23dBi Patch Antenna, Average**

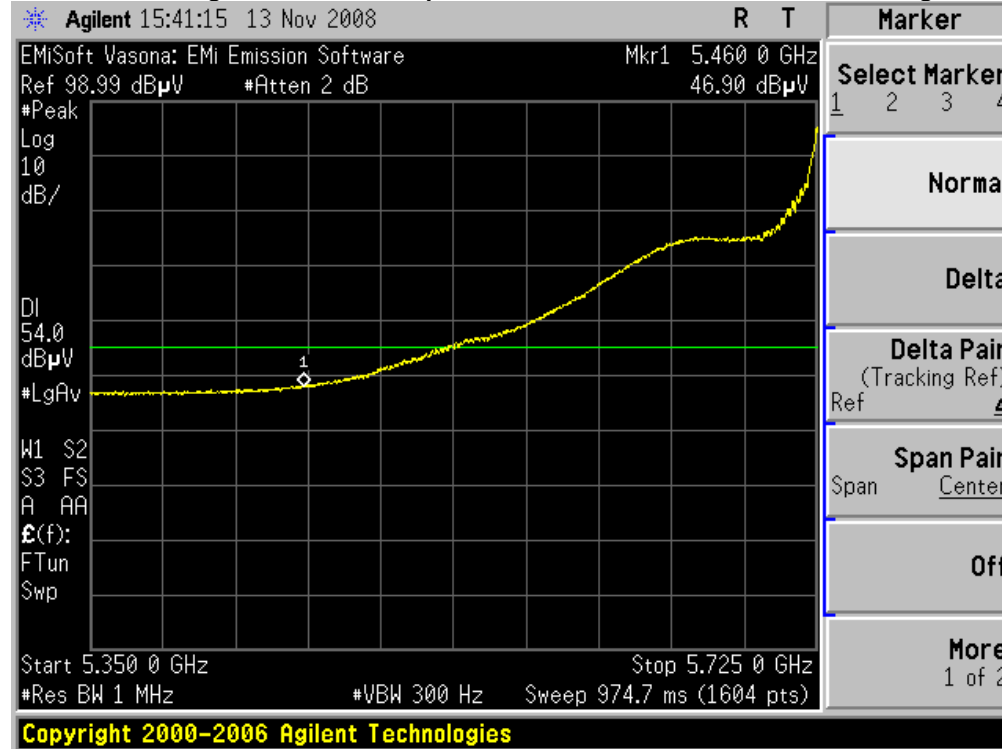


**Radiated Bandedge, 5825 MHz, 6 Mbps, Non HT-20, 23dBi Patch Antenna, Average**

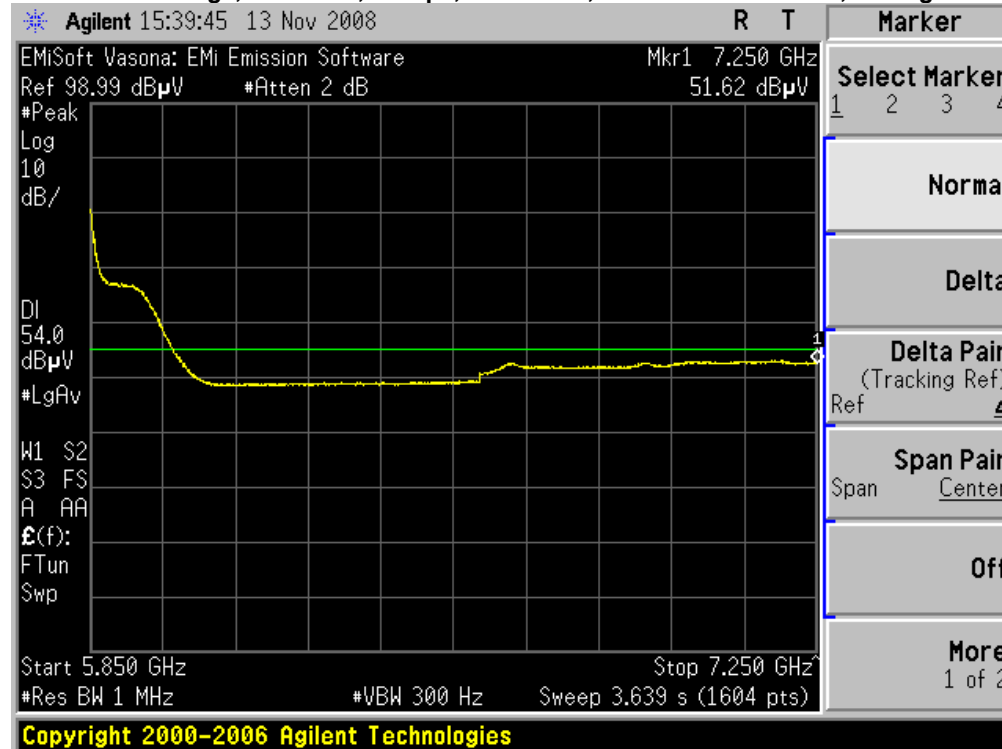




**Radiated Bandedge, 5745/5765 MHz, m0, HT-40, 23dBi Patch Antenna, Average**

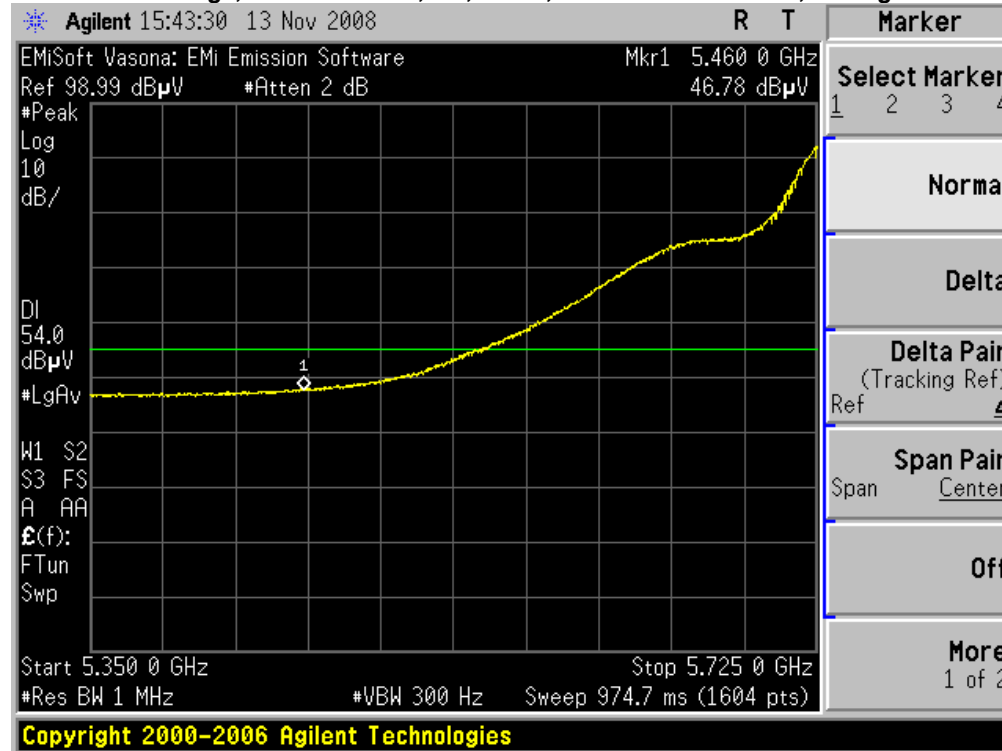


**Radiated Bandedge, 5785/5805 MHz, m0, HT-40, 23dBi Patch Antenna, Average**

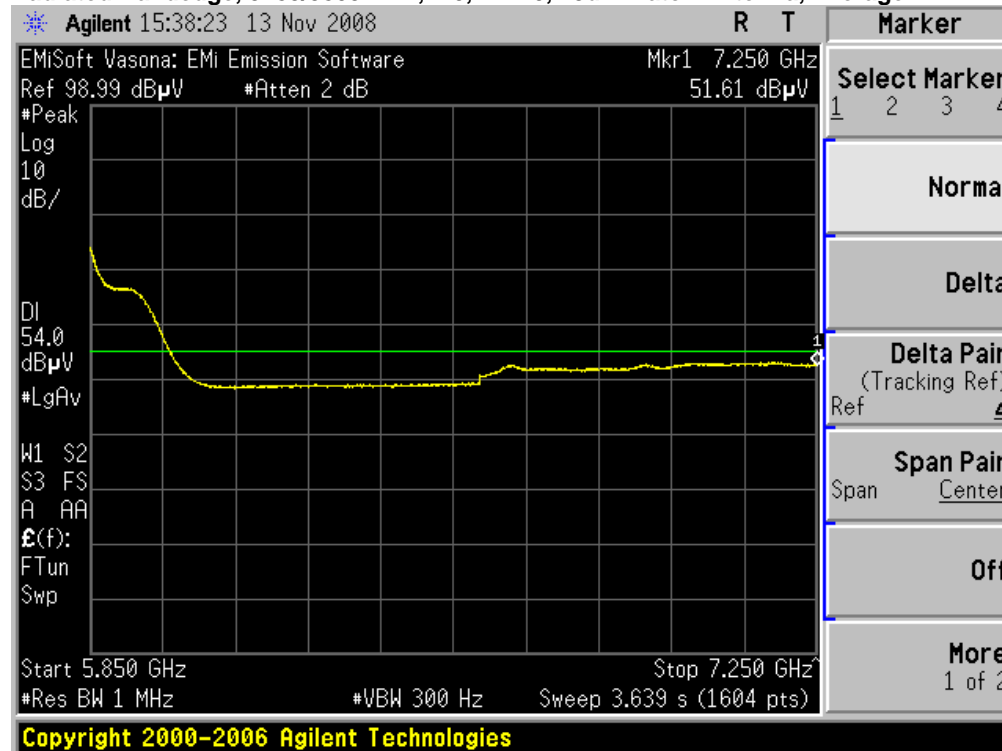




**Radiated Bandedge, 5745 MHz, 6 Mbps, Non HT-20, 23dBi Patch Antenna, Peak**

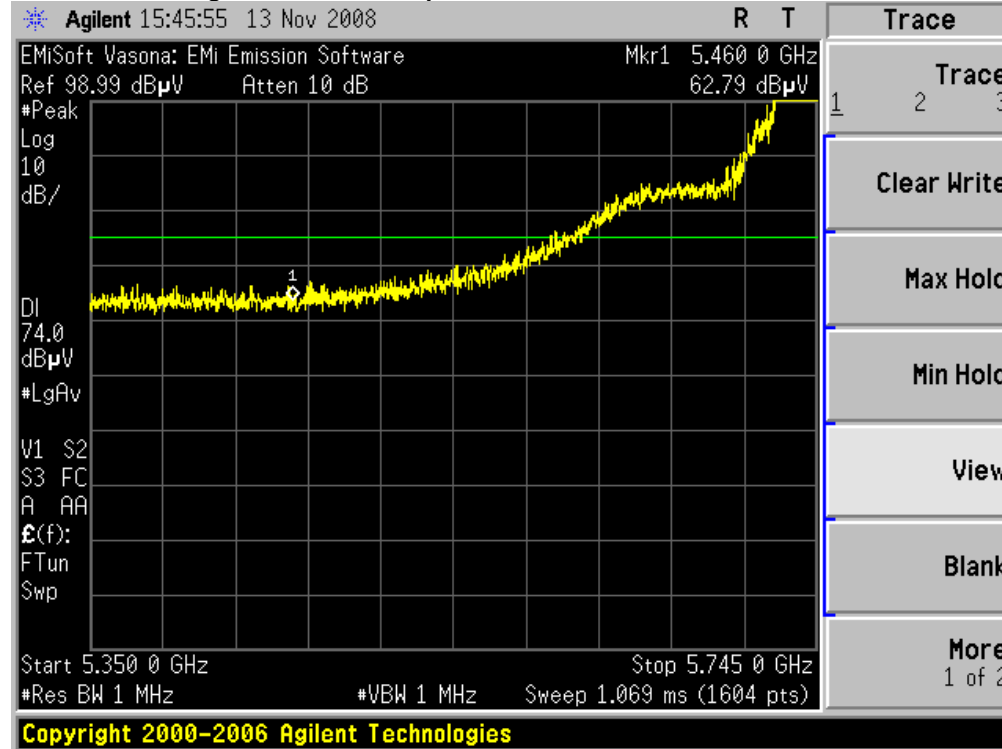


**Radiated Bandedge, 5825 MHz, 6 Mbps, Non HT-20, 23dBi Patch Antenna, Peak**

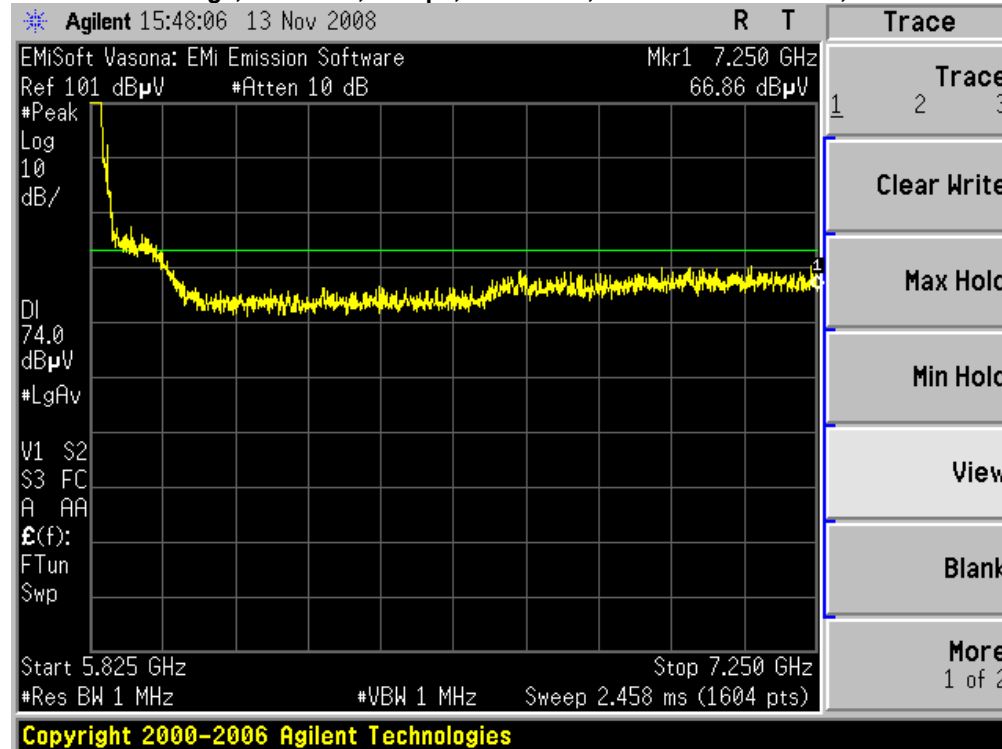






**Radiated Bandedge, 5745/5765 MHz, m0, HT-40, 23dBi Patch Antenna, Peak**

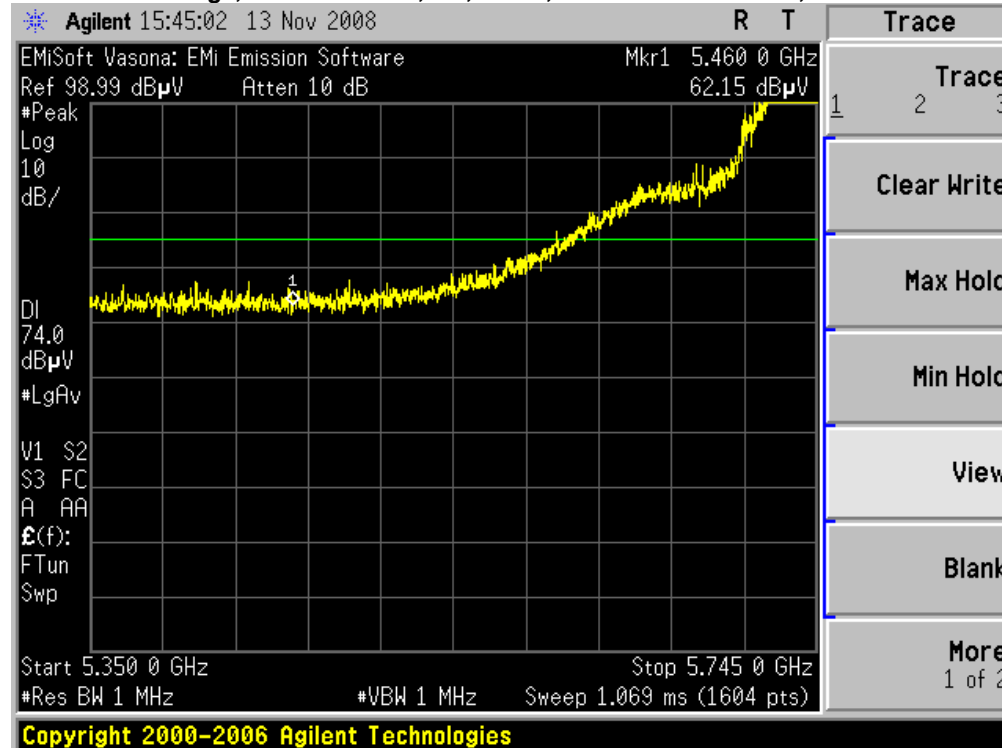


**Radiated Bandedge, 5785/5805 MHz, m0, HT-40, 23dBi Patch Antenna, Peak**

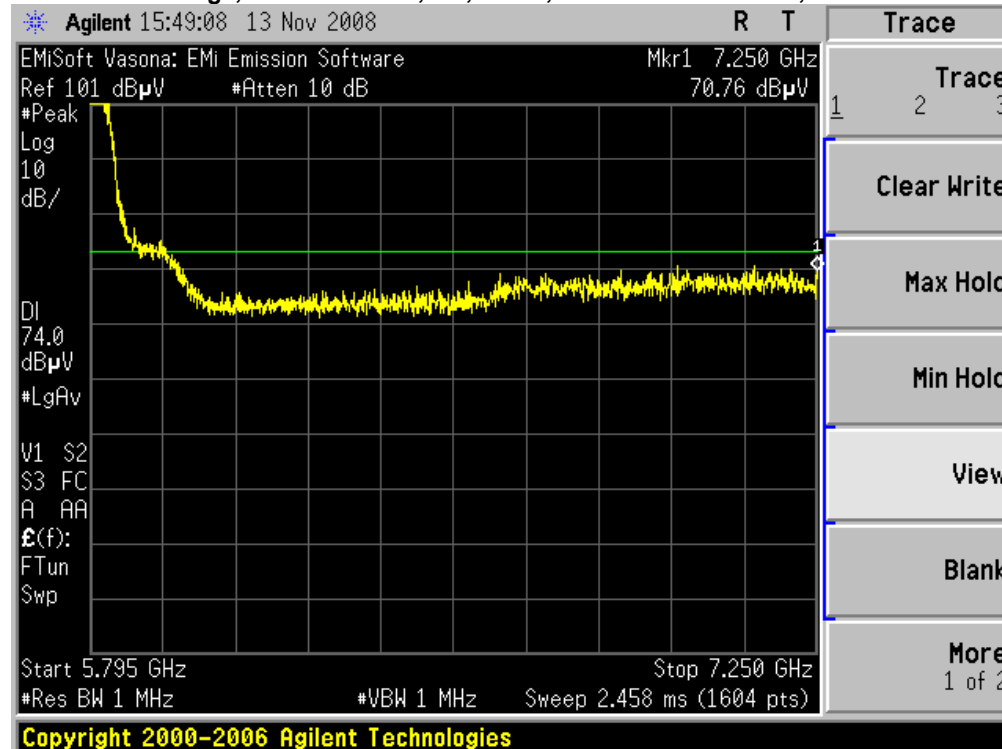




**Radiated Bandedge, 5745 MHz, 6 Mbps, Non HT-20, 28dBi Dish Antenna, Average**

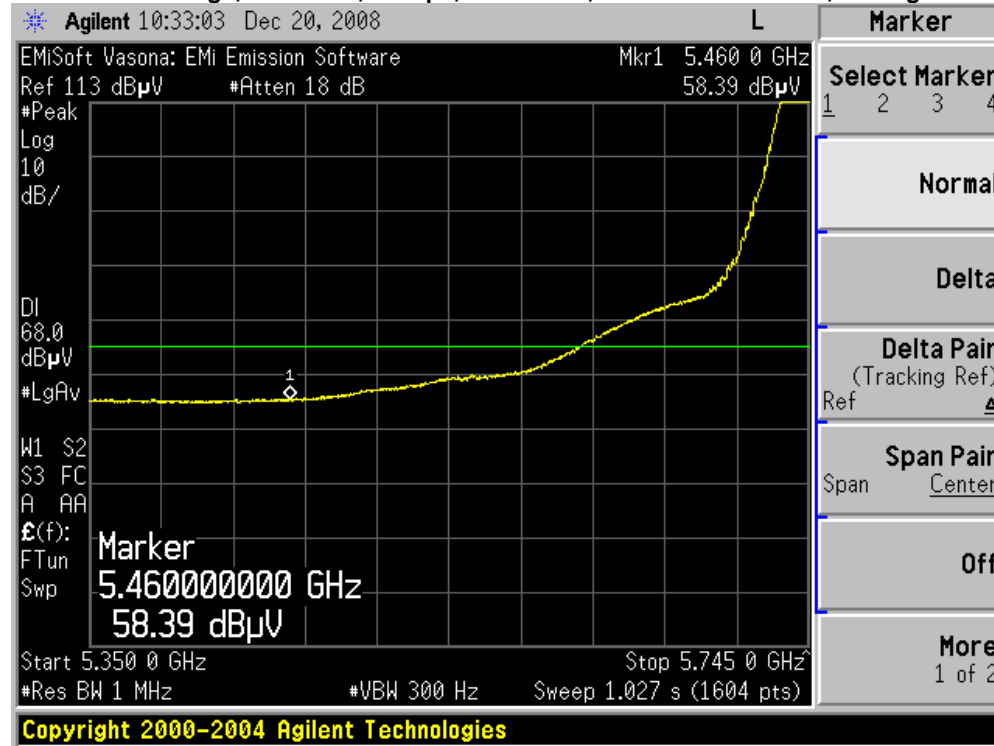


**Radiated Bandedge, 5825 MHz, 6 Mbps, Non HT-20, 28dBi Dish Antenna, Average**

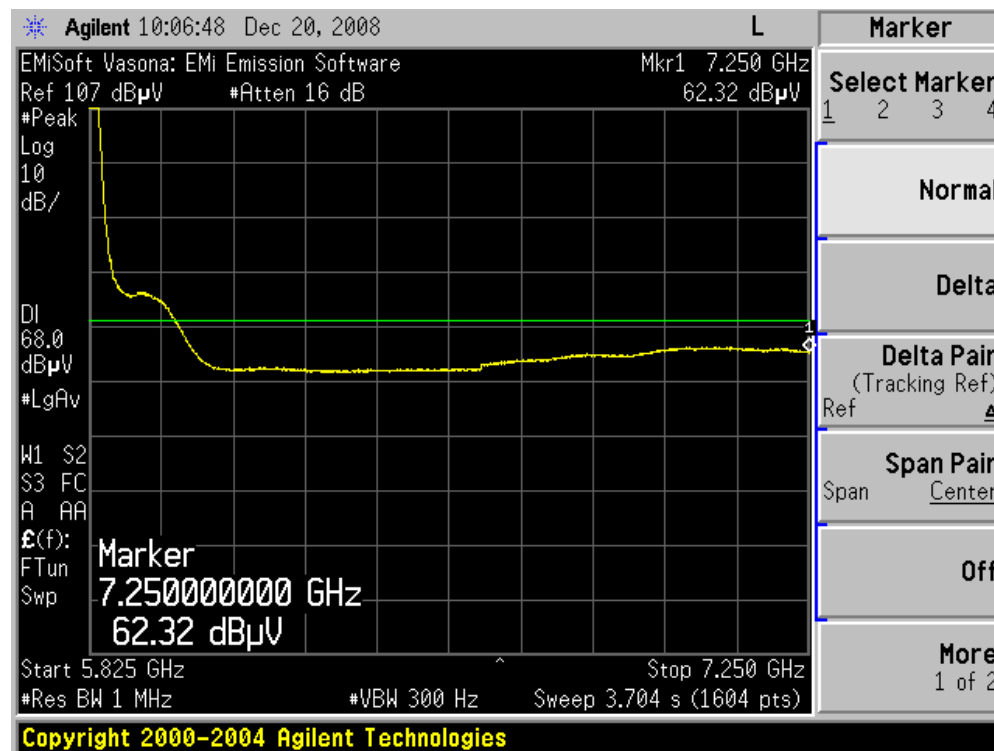




**Radiated Bandedge, 5745/5765 MHz, m0, HT-40, 28dBi Dish Antenna, Average**

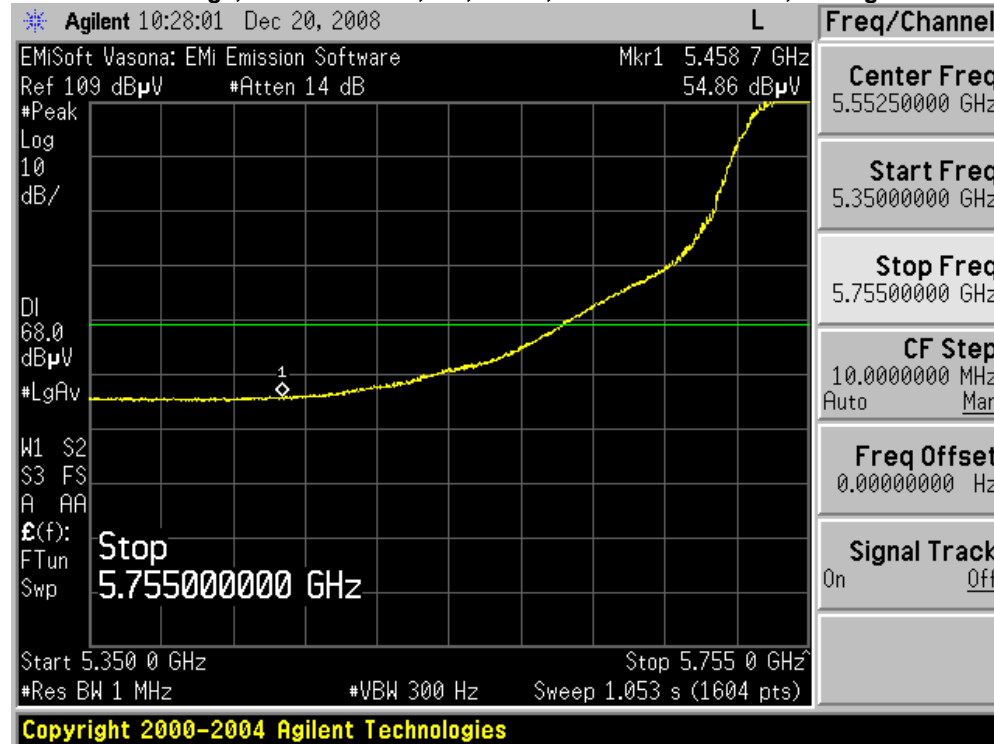


**Radiated Bandedge, 5785/5805 MHz, m0, HT-40, 28dBi Dish Antenna, Average**

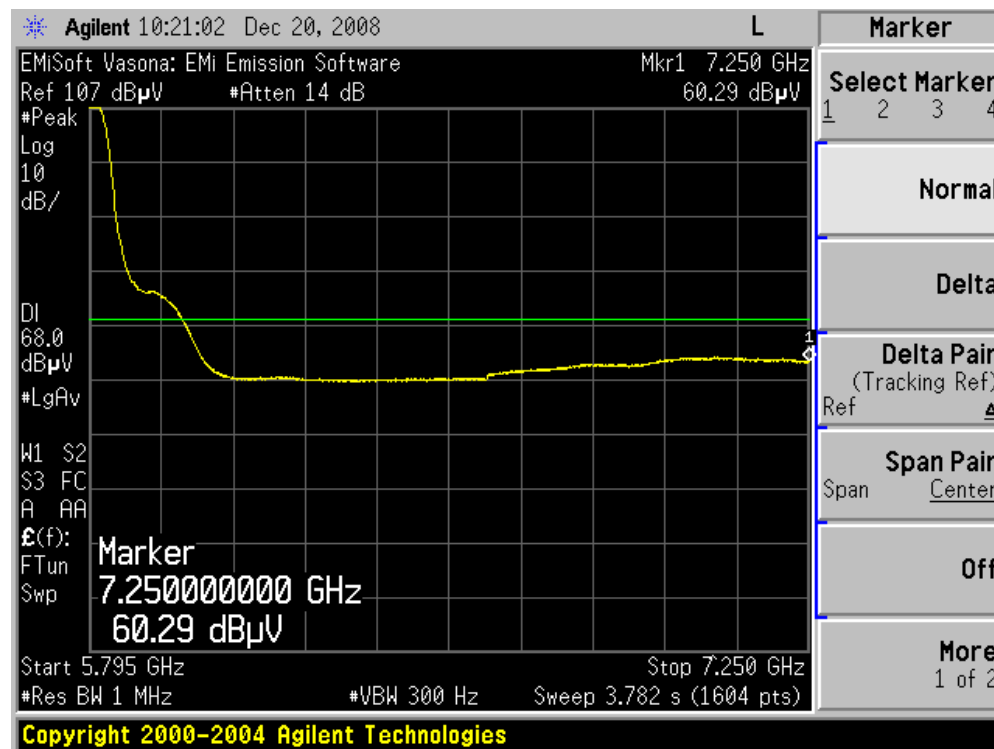




**Radiated Bandedge, 5745 MHz, 6 Mbps, Non HT-20, 28dBi Dish Antenna, Peak**

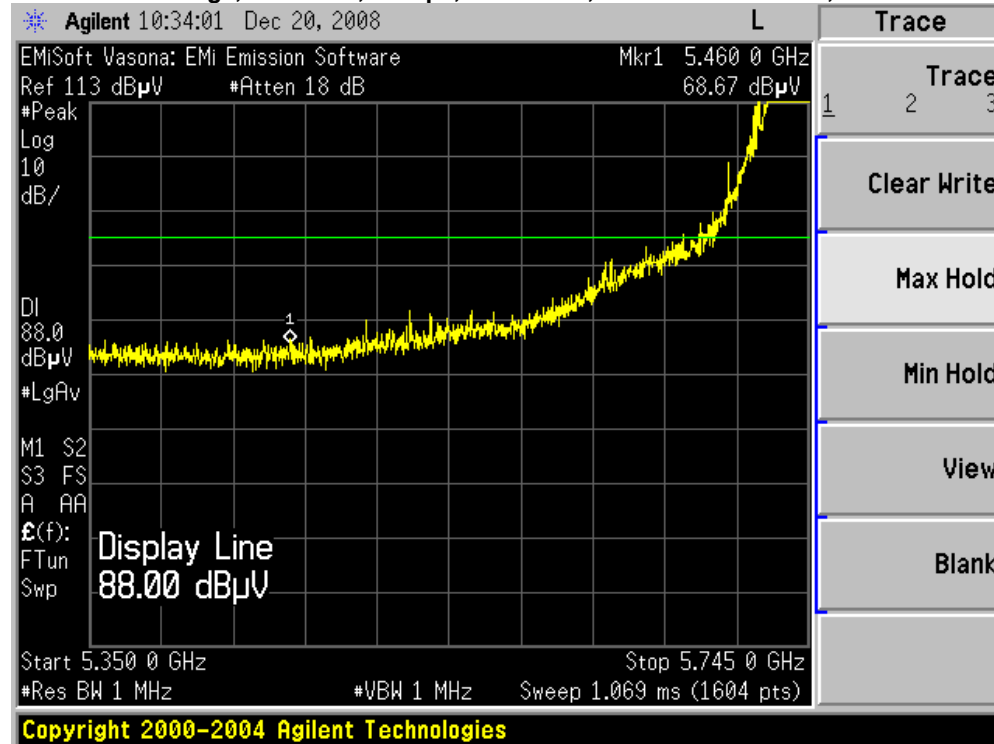


**Radiated Bandedge, 5825 MHz, 6 Mbps, Non HT-20, 28dBi Dish Antenna, Peak**

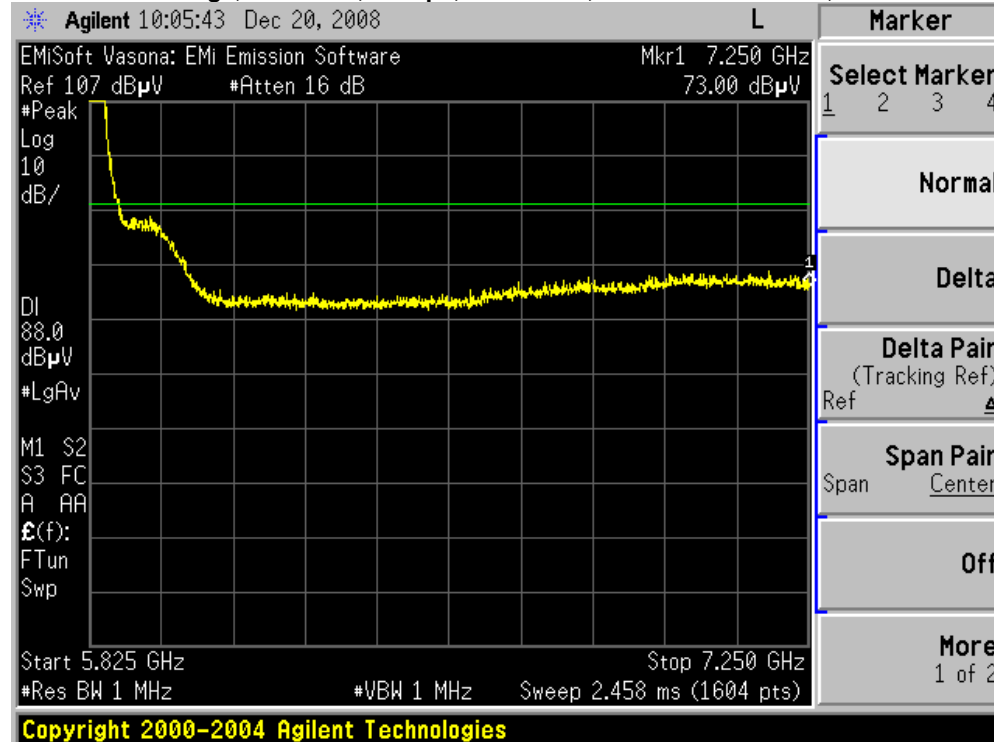




**Radiated Bandedge, 5745/5765 MHz, m0, HT-40, 28dBi Dish Antenna, Peak**

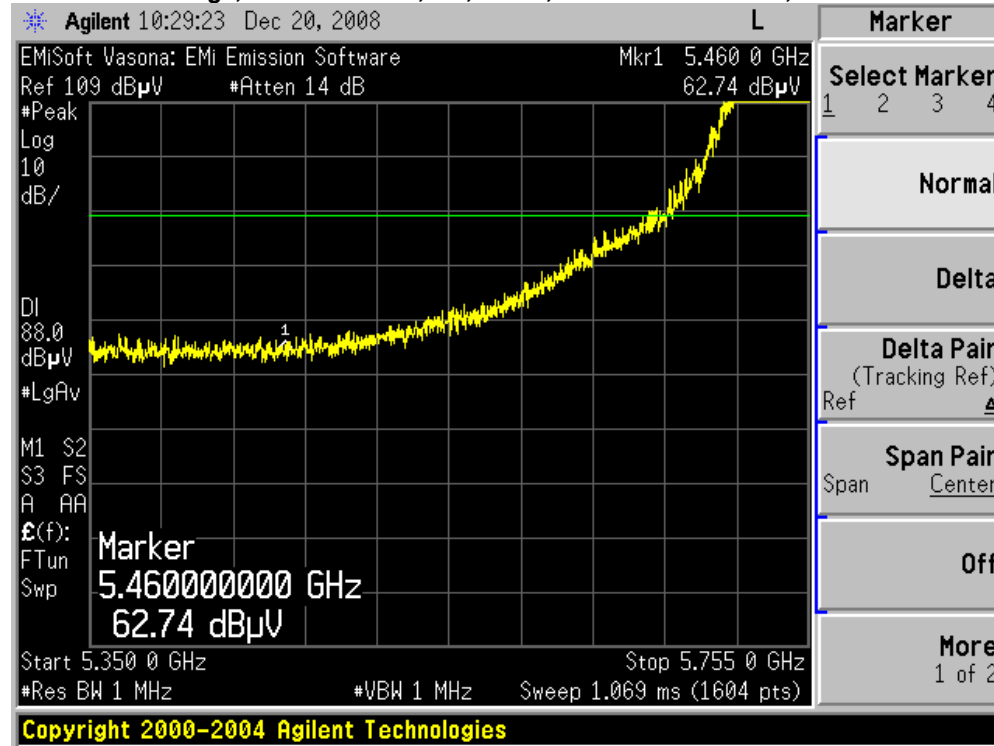

**Radiated Bandedge, 5785/5805 MHz, m0, HT-40, 28dBi Dish Antenna, Peak**

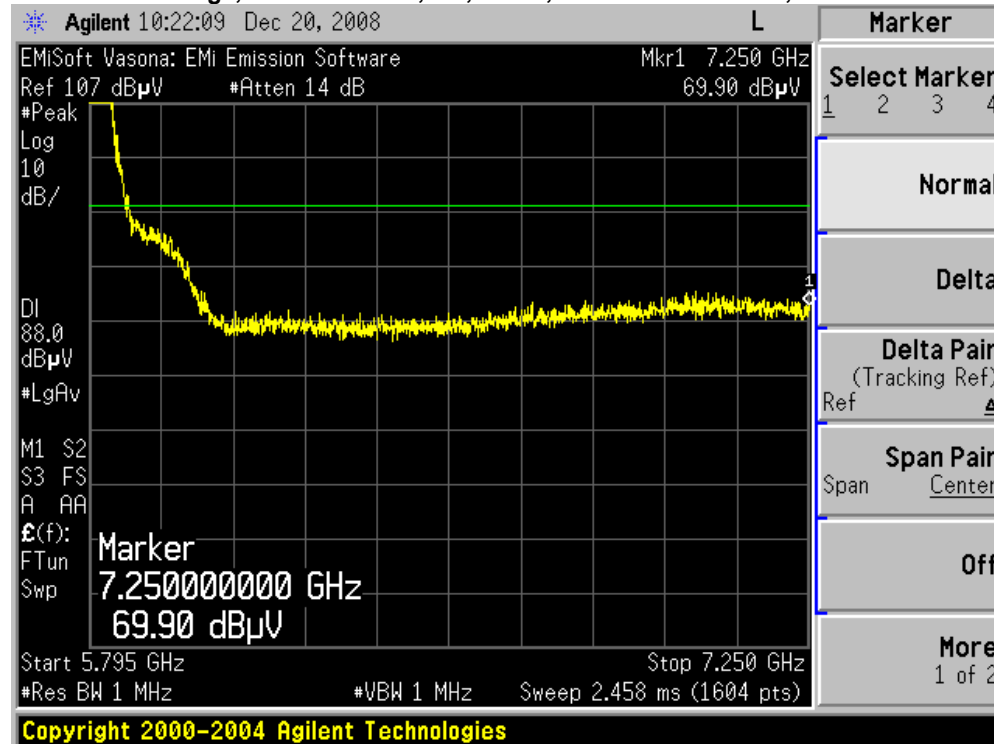



## Radiated Spurious Emissions

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 1GHz – 18 GHz  
 Reference Level: 80 dBuV  
 Attenuation: 10 dB  
 Sweep Time: Coupled  
 Resolution Bandwidth: 1MHz  
 Video Bandwidth: 1 MHz for peak, 10 Hz for average  
 Detector: Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)


Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m  
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.


Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5745	Non HT-20	6	52.9	54	1.1
5785	Non HT-20	6	51.1	54	2.9
5825	Non HT-20	6	52.0	54	2.0
5745/5765	HT-40	m0	46.4	54	7.6
5785/5805	HT-40	m0	46.1	54	7.9



**Radiated Spurious, 5745 MHz, 6 Mbps, Non HT-20, Average**

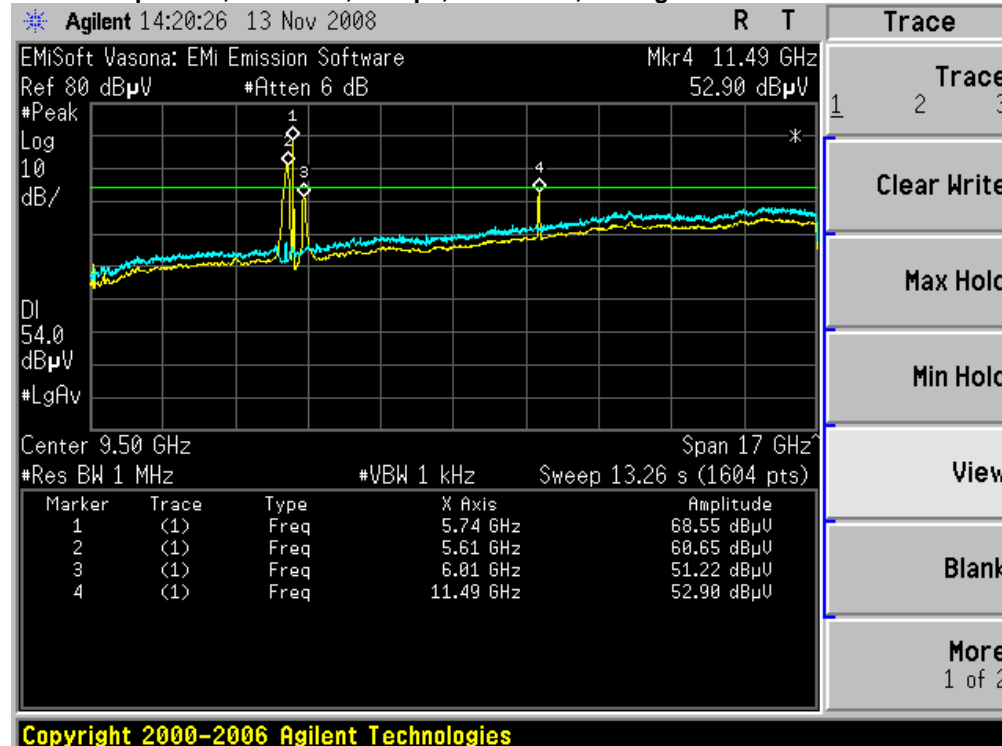


**Radiated Spurious, 5785 MHz, 6 Mbps, Non HT-20, Average**

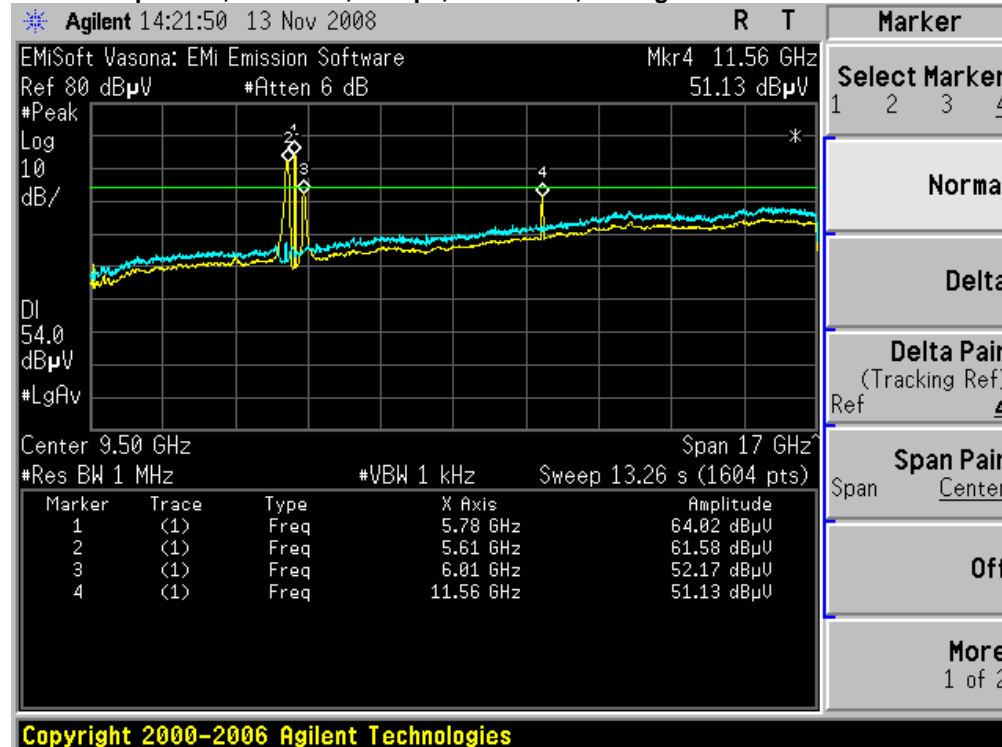




**Radiated Spurious, 5825 MHz, 6 Mbps, Non HT-20, Average**

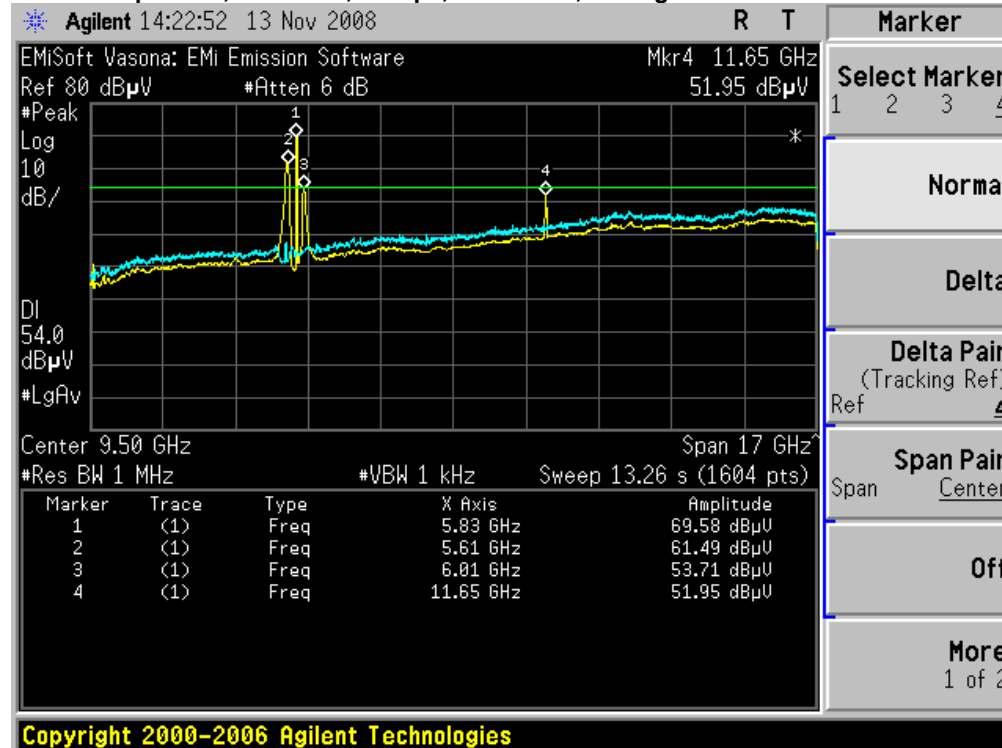


**Radiated Spurious, 5745/5765 MHz, m0, HT-40, Average**

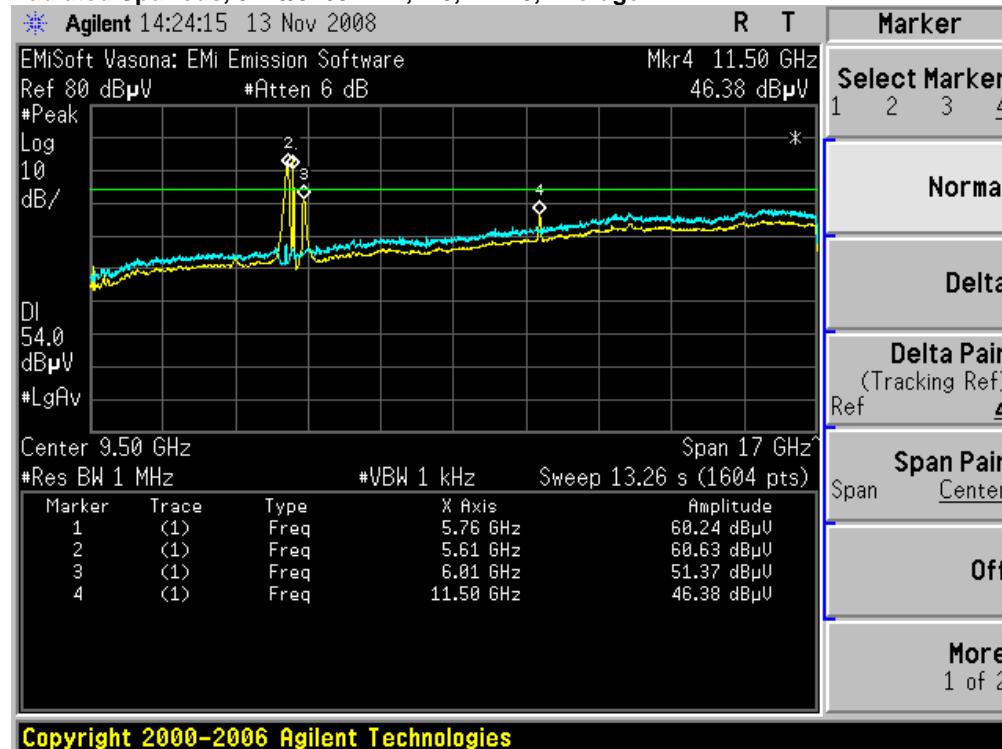






Radiated Spurious, 5785/5805 MHz, m0, HT-40, Average

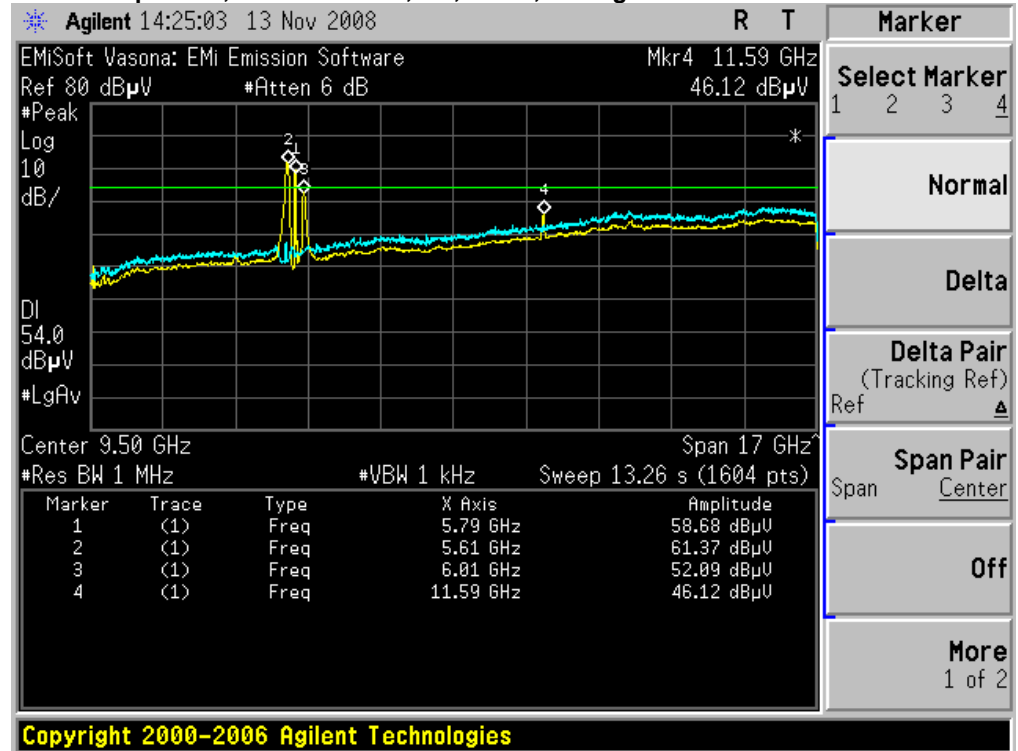




**Radiated Spurious, 5745 MHz, 6 Mbps, Non HT-20, Peak**

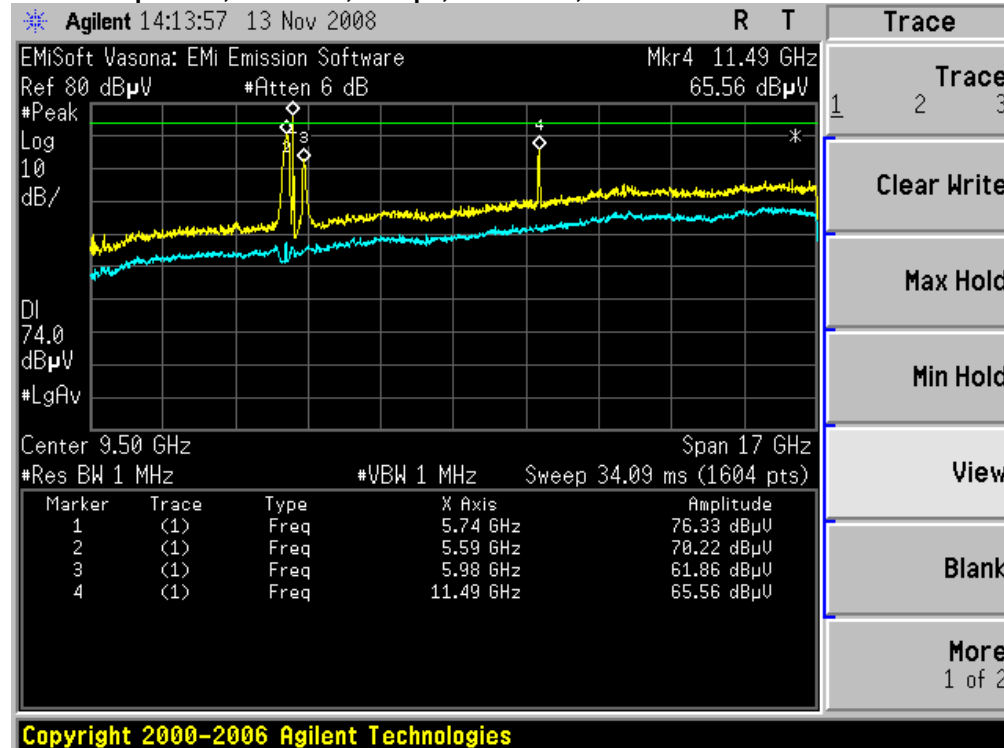


**Radiated Spurious, 5785 MHz, 6 Mbps, Non HT-20, Peak**

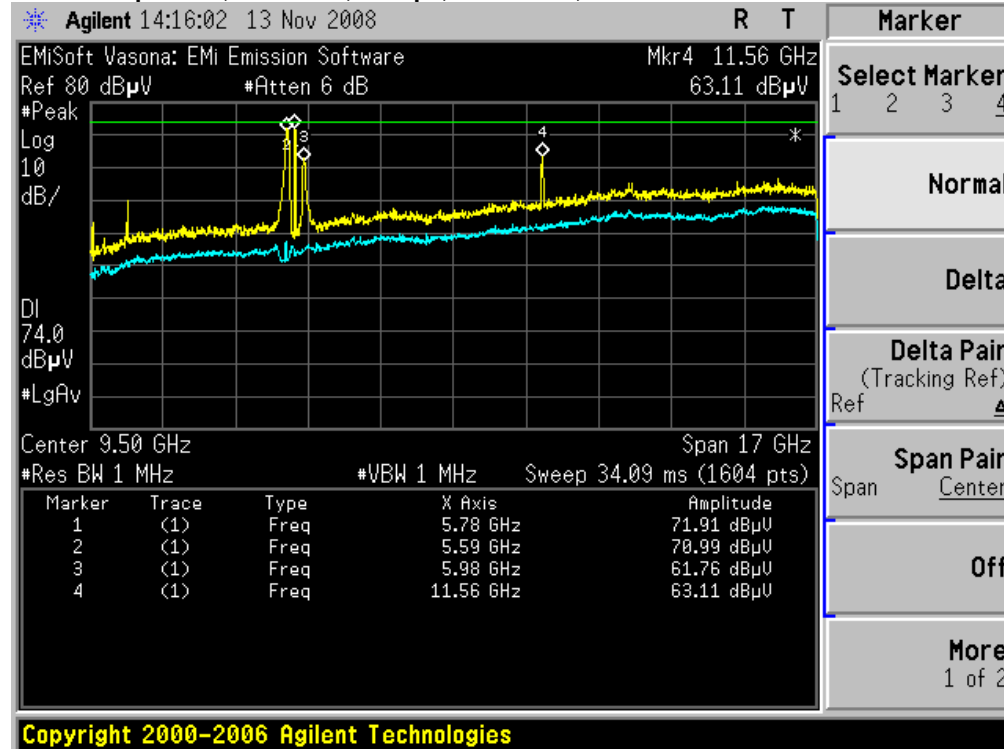




**Radiated Spurious, 5825 MHz, 6 Mbps, Non HT-20, Peak**

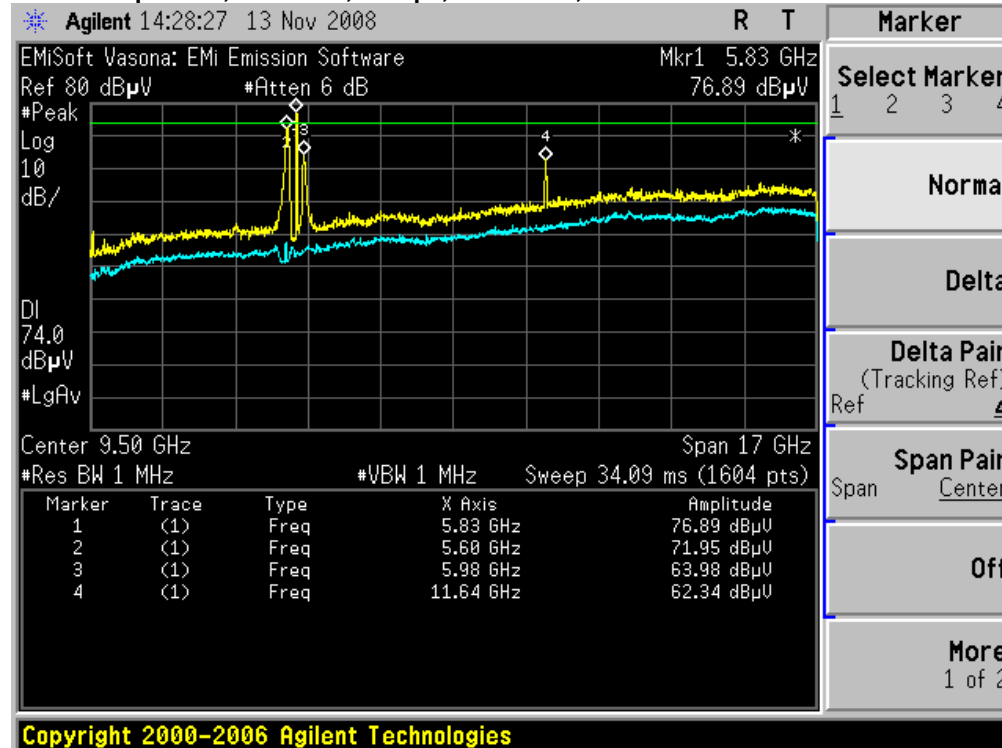


**Radiated Spurious, 5745/5765 MHz, m0, HT-40, Peak**

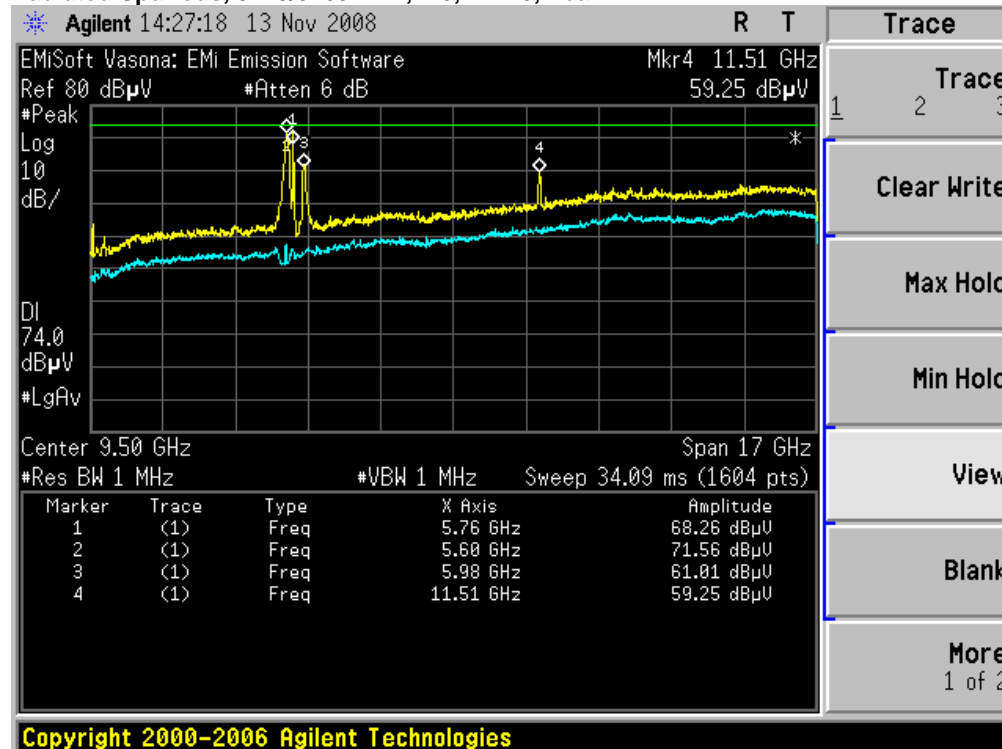




**Radiated Spurious, 5785/5805 MHz, m0, HT-40, Peak**

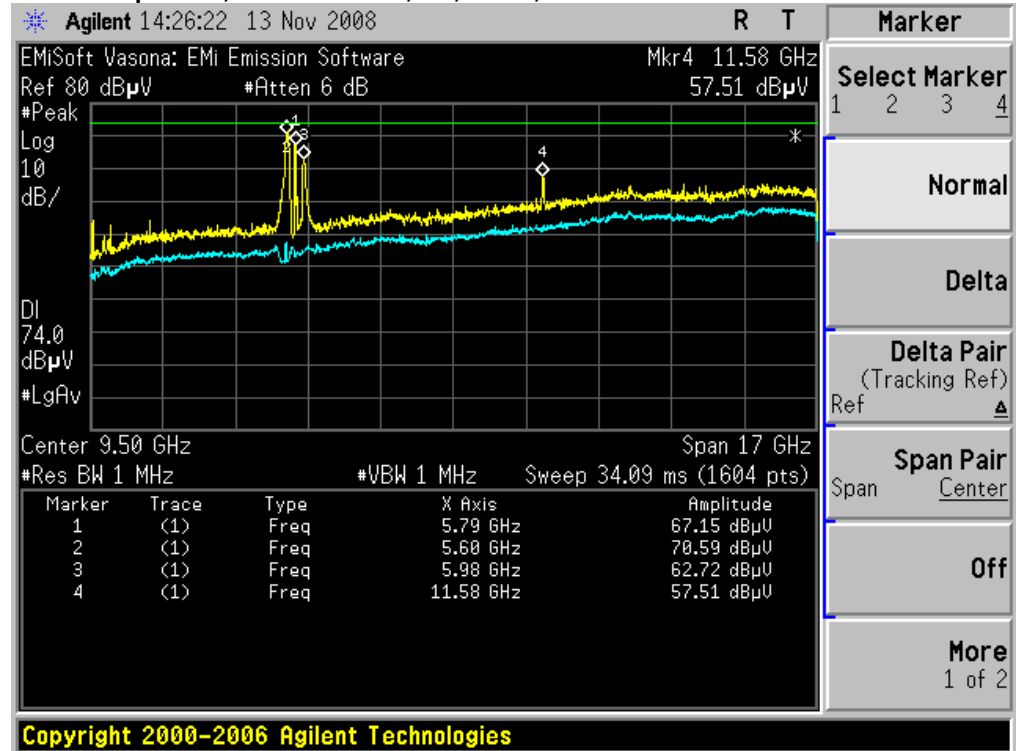





### Radiated Spurious Rx Emissions, AVG

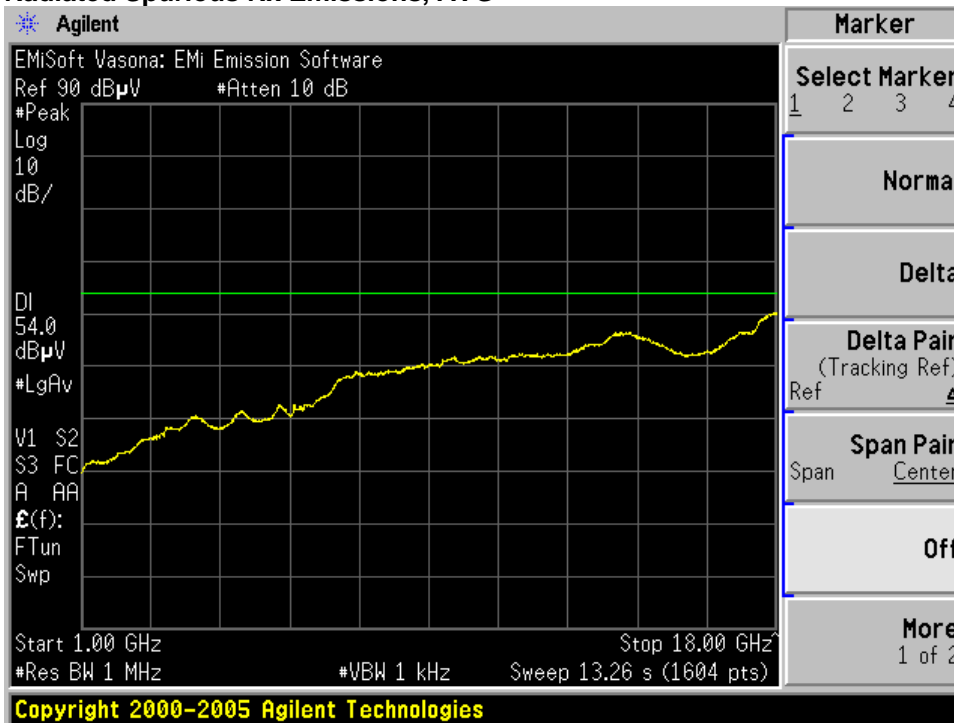


### Radiated Spurious Rx Emissions, PK

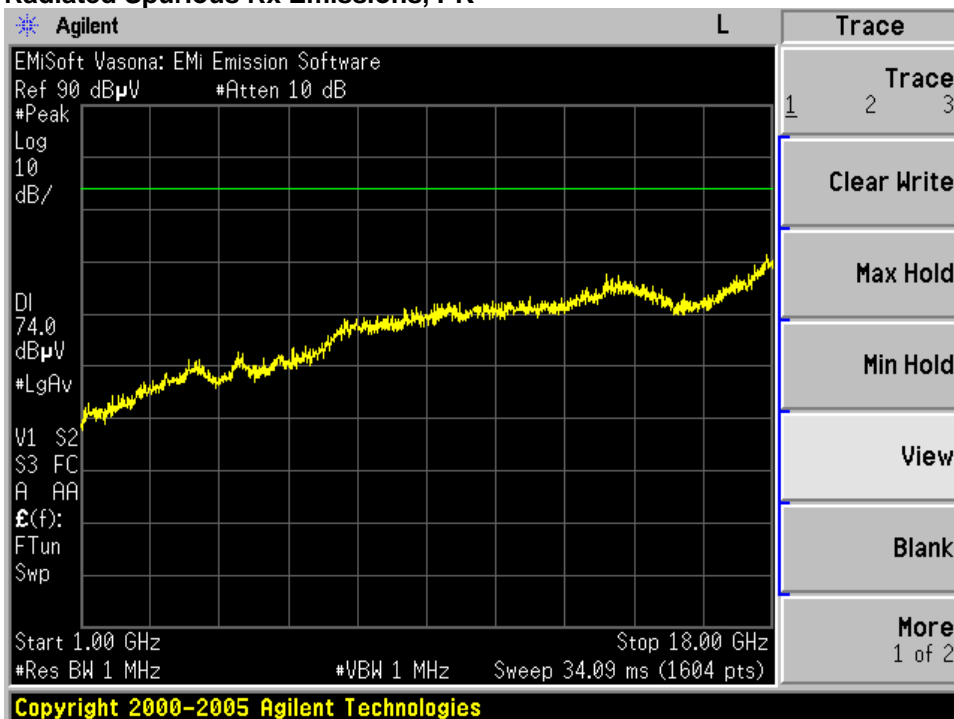

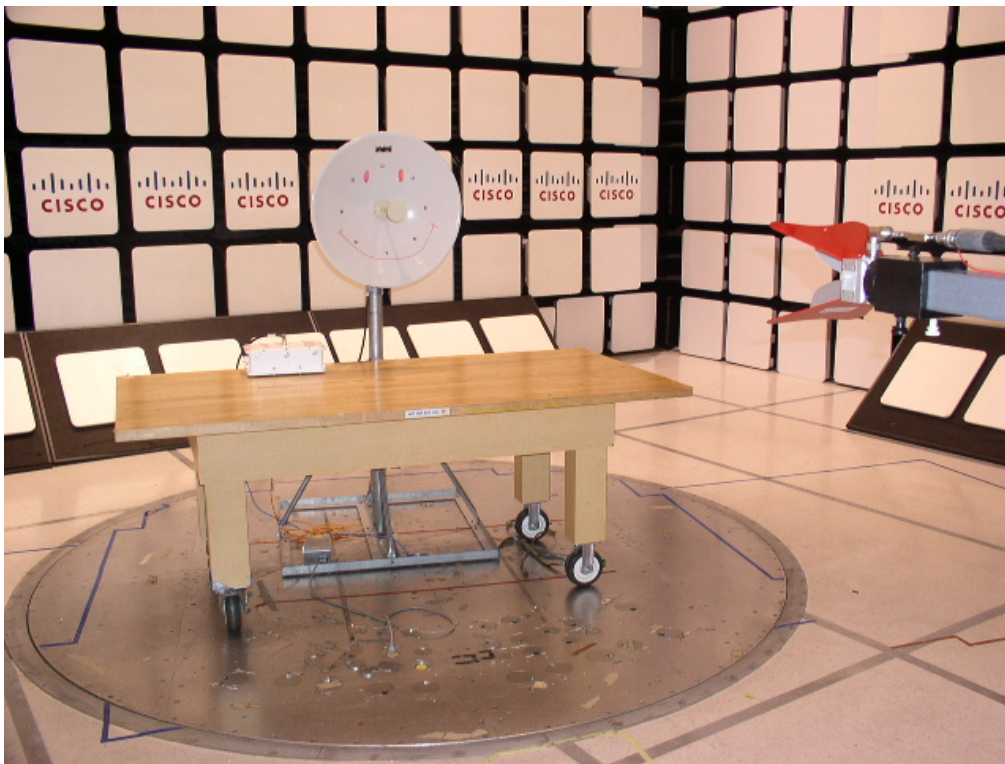




### Conducted emissions

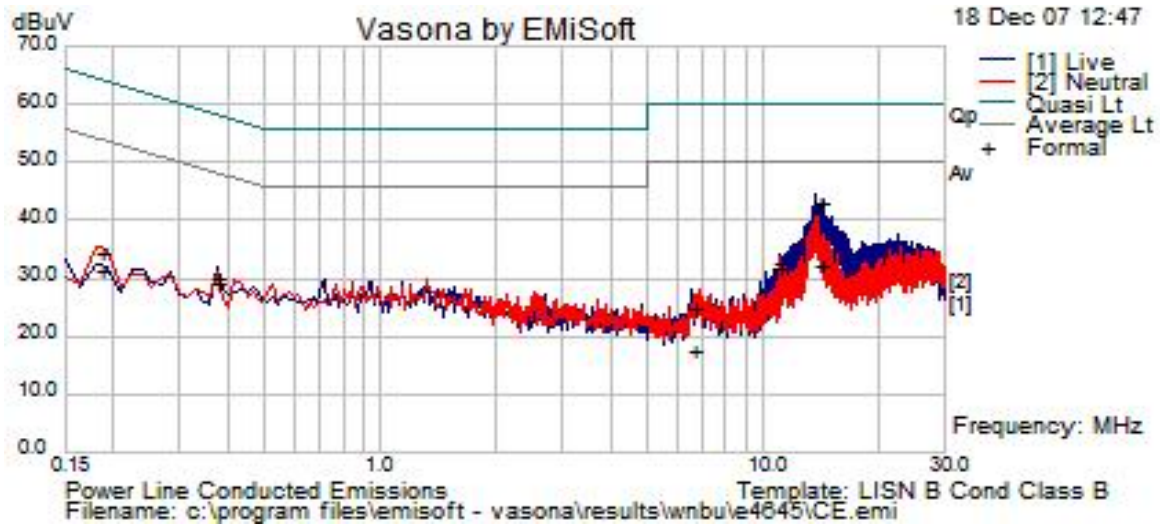

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.190706	8.55	20.39	0.25	29.19	Av	N	54.0	-24.8	Pass	
0.190706	11.56	20.39	0.25	32.19	Qp	N	64.0	-31.8	Pass	
0.382342	7.02	20.07	0.16	27.25	Av	L	48.2	-21.0	Pass	
0.382342	7.87	20.07	0.16	28.1	Qp	L	58.2	-30.1	Pass	
6.731672	2.54	20.1	0.18	22.82	Qp	N	60.0	-37.2	Pass	
6.731672	-4.76	20.1	0.18	15.52	Av	N	50.0	-34.5	Pass	
11.139486	9.27	20.16	0.19	29.62	Av	N	50.0	-20.4	Pass	
11.139486	10.35	20.16	0.19	30.7	Qp	N	60.0	-29.3	Pass	
14.327114	9.9	20.23	0.2	30.33	Av	L	50.0	-19.7	Pass	
14.327114	20.5	20.23	0.2	40.93	Qp	L	60.0	-19.1	Pass	
14.327434	20.39	20.23	0.2	40.82	Qp	L	60.0	-19.2	Pass	
14.327434	9.67	20.23	0.2	30.11	Av	L	50.0	-19.9	Pass	




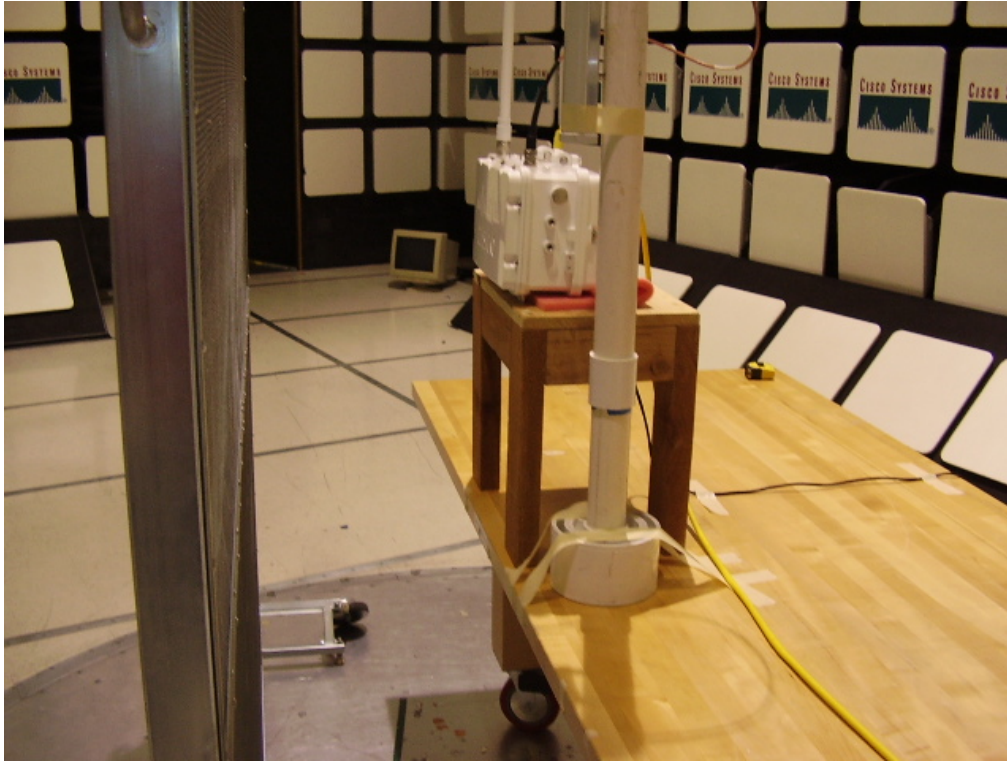






**Radiated emissions**

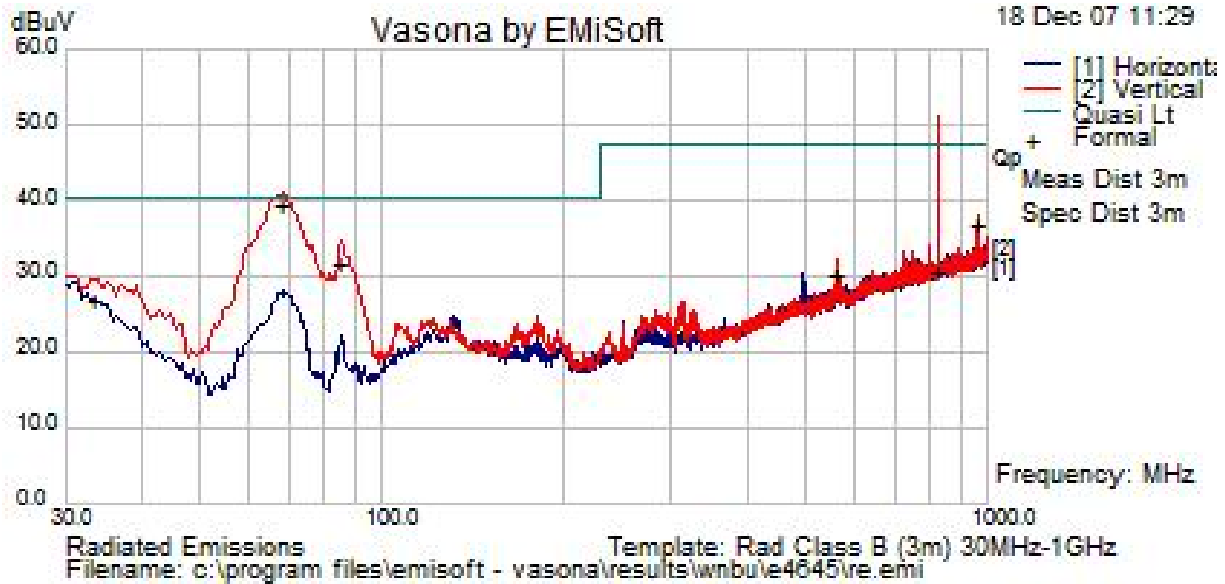

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
33.487	6.4	0.45	18.21	25.05	Qp	V	100	106	40.5	-15.45	0	
68.271	29.35	0.64	7.83	37.81	Qp	V	120	88	40.5	-2.69	0	
85.413	21.97	0.72	7.23	29.93	Qp	V	162	126	40.5	-10.57	0	
563.993	8.13	1.87	18.58	28.58	Qp	V	136	350	47.5	-18.92	0	
830.246	4.66	2.29	21.7	28.66	Qp	V	114	187	47.5	-18.84	0	
962.683	9.51	2.46	23	34.98	Qp	V	218	360	47.5	-12.52	0	

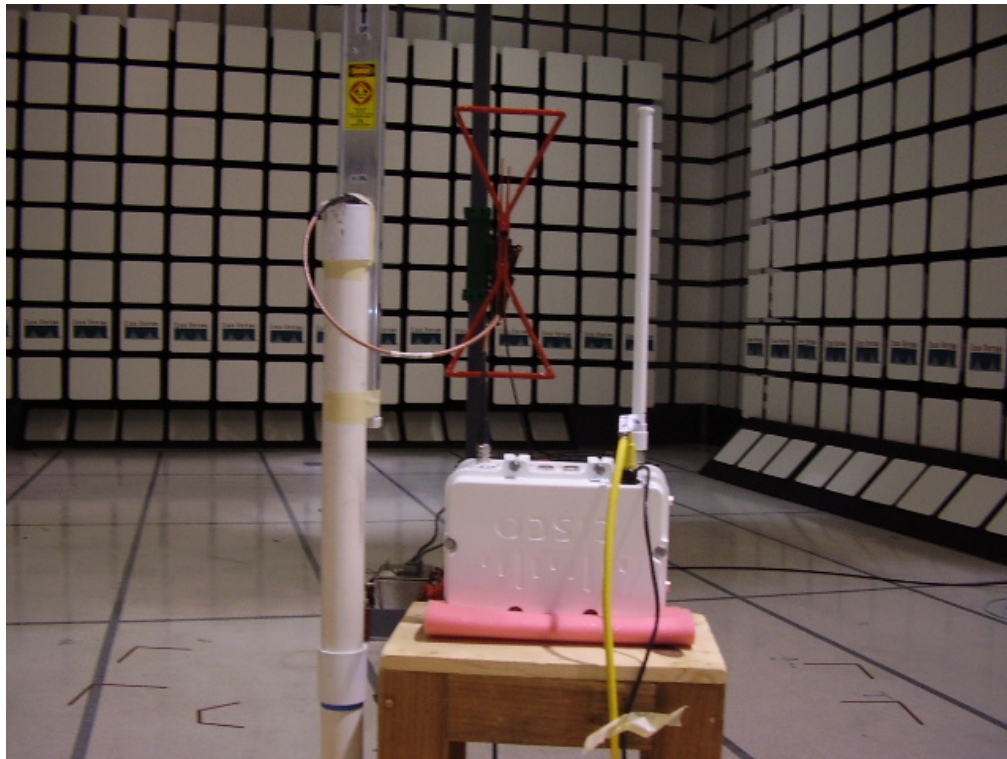

## Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 * P * G) / d} \quad \text{and} \quad S = E^2 / 3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm<sup>2</sup>

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W}) / 1000 \quad d(\text{cm}) = 100 * d(\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d=Distance in cm

P=Power in mW

G=Numerica Antenna Gain

S=Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm}) / 10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$s = ((0.282 * 10^{((P + G) / 20)}) / d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm<sup>2</sup>



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$  maximum. The highest supported antenna gain is 6 dBi (9dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Bit Rate (Mbps)	Power Density (mW/cm <sup>2</sup> )	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
5745	6	1	28.0	28	<b>177.93</b>	20	-157.93
5785	6	1	28.0	28	<b>177.93</b>	20	-157.93
5825	6	1	28.0	28	<b>177.93</b>	20	-157.93

**MPE Calculations**

To maintain compliance, installations will assure a separation distance of at least 2m.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	Bit Rate (Mbps)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Margin (mW/cm <sup>2</sup> )
5745	6	20	28.0	28	<b>79.15</b>	1	-78.15
5785	6	20	28.0	28	<b>79.15</b>	1	-78.15
5825	6	20	28.0	28	<b>79.15</b>	1	-78.15

**Appendix C: Test Equipment/Software Used to perform the test**

Equip #	Manufacturer	Model	Description	Next Due
CIS005691	Miteq	NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	10-Oct-09
CIS008195	TTE	H613-150K-50-21378	Hi Pass Filter - 150KHz cutoff	31-Dec-08
CIS008588	Fischer	FCC-RFM2F-520R	LISN AC Adaptor - Std 120V outlet	15-Mar-09
CIS021117	Micro-Coax	UFB311A-0-2484-520520	RF Coaxial Cable, to 18GHz, 248.4 in	18-Aug-09
CIS025644	Micro-Coax	UFB311A-1-3150-504504	RF Coaxial Cable, to 18GHz, 315 in	8-Oct-09
CIS025716	HP	11500E	Radio testing cable 3.5mm	30-Apr-09
CIS030564	Micro-Coax	UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	18-Aug-09
CIS034975	Midwest Microwave	ATT-0640-20-29M-02	Attenuator, 20dB, DC-40GHz	15-May-09
CIS037228	Micro-Tronics	BRC50705	Notch Filter, SB:5.725-5.875GHz, to 12 GHz	10-Mar-09
CIS040503	Agilent	E4440A	Precision Spectrum Analyzer	17-Oct-09
CIS041201	ETS-Lindgren	3117	Double Ridged Horn Antenna	22-Jul-09
COM000590	Agilent	E4448A	Spectrum Analyzer	26-Mar-09
COM000594	MegaPHase	SF18 S1S1 36	RF Coaxial Cable, to 18GHz, 36 in	10-Oct-09
COM000601	Agilent	E4417A	EPM-P Series Power Meter	8-Oct-09
COM000602	Agilent	E9327A	Peak and Average Power Sensor	8-Oct-09