



## **Test Report**

# **AIR-CAP3502P-A-K9**

## **Cisco Aironet 802.11n Single Band Access Points**

**FCC ID: LDK102073P**

**IC: 2461B-102073P**

**2400-2483.5 MHz**

**Against the following Specifications:**

**CFR47 Part 15.247**

**RSS210**

**Cisco Systems**

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

**SECTION 1: OVERVIEW .....3**

**1.1 TEST SUMMARY .....3**

**SECTION 2: ASSESSMENT INFORMATION.....4**

**2.1 GENERAL .....4**

**2.4 TESTING FACILITIES .....5**

**2.6 EUT DESCRIPTION.....5**

**SECTION 4: SAMPLE DETAILS.....7**

**APPENDIX A: EMISSION TEST RESULTS .....8**

AVERAGE OUTPUT POWER .....8

6DB BANDWIDTH .....9

99% AND 26DB BANDWIDTH.....21

PEAK OUTPUT POWER.....33

POWER SPECTRAL DENSITY .....46

CONDUCTED SPURIOUS EMISSIONS .....58

**APPENDIX B: EMISSION TEST RESULTS .....71**

RADIATED BANDEDGE.....71

RADIATED SPURIOUS EMISSIONS.....129

2.4GHZ 5.2DBI OMNI CONDUCTED EMISSIONS .....160

CONDUCTED EMISSIONS .....160

RADIATED EMISSIONS.....162

**MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....164**

**APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST.....166**



## Section 1: Overview

### 1.1 Test Summary

samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

#### Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
  - Temperature 15°C to 35°C (54°F to 95°F)
  - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
  - Humidity 10% to 75\*%

\*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
  - 110V 60 Hz (+/-20%)
  - 220V 50 Hz (+/-20%)

**This report must not be reproduced except in full, without written approval of Cisco Systems.**



## 2.2 Date of start of testing

13-July-2009

## 2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

## 2.4 Testing facilities

This assessment was performed by:

### Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

### Test Engineers

James Nicholson

## 2.5 Equipment Assessed (EUT)

AIR-CAP3502P-A-K9 Cisco Aironet 802.11n Dual Band Access Point

## 2.6 EUT Description

The AIR-CAP3502P-A-K9 Cisco Aironet 802.11n Dual Band Access Points requires professional installation, and supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

- Legacy CCK, Single Antenna, 1 to 11 Mbps
- Legacy CCK, Dual Antennas, 1 to 11 Mbps
- Legacy OFDM, Non HT-20, Single Antenna, 6 to 54 Mbps
- Legacy OFDM, Non HT-20, Dual Antennas, 6 to 54 Mbps
- Legacy OFDM , Non HT-20 Dual Antennas with Beam Forming, 6 to 54 Mbps
- HT-20, Single Antenna, M0 to M7
- HT-20, Dual Antennas, M0 to M15
- Non HT-40 Duplicate, Single Antenna, 6-54 Mbps
- Non HT-40 Duplicate, Dual Antennas, 6-54 Mbps
- HT-40, Single Antenna, M0 to M7
- HT-40, Dual Antennas, M0 to M15



The following antennas are supported by this product series. The items in bold will be specifically tested and cover all others. The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
<b>2.4 GHz</b>	AIR-ANT2422DB-R	Articulating black dipole	2
	AIR-ANT4941	Articulating black dipole	2
	AIR-ANT2422DG-R	Non-articulating gray dipole	2
	AIR-ANT2422DW-R	Articulating white dipole	2
	AIR-ANT2422SDW-R	Stubby monopole	3
	<b>AIR-ANT2430V-R</b>	<b>3-element MIMO ceiling mount omni</b>	<b>3</b>
	<b>AIR-ANT2440NV-R</b>	<b>3-element MIMO wall/mast mount omni</b>	<b>4</b>
	AIR-ANT1728	indoor omni	5
	AIR-ANT2450S-R	Sector	5
	AIR-ANT2506	Outdoor omni	5
	AIR-ANT2460P-R	Patch	6
	<b>AIR-ANT2460NP-R</b>	<b>3-element MIMO patch</b>	<b>6</b>
	AIR-ANT2485P-R	Patch	8.5
	AIR-ANT2410Y-R	Yagi	10
<b>AIR-ANT1949</b>	<b>Yagi</b>	<b>13.5</b>	
<b>5 GHz</b>	AIR-ANT5135D-R	Articulating dipole	3.5
	AIR-ANT5135DB-R	Articulating dipole	3.5
	AIR-ANT5135DG-R	Non-articulating gray dipole	3.5
	AIR-ANT5135DW-R	Articulating white dipole	3.5
	AIR-ANT5135SDW-R	Stubby monopole	3.5
	AIR-ANT5140V-R	3-element MIMO ceiling mount omni	4
	AIR-ANT5160V-R	Omni-Directional	6
	AIR-ANT5160NP-R	3-element MIMO patch antenna	6
<b>2.4/5 GHz</b>	AIR-ANT2451NV-R	MIMO 6-Element Dual Band Omni	2.5 / 3.5
	<b>AIR-ANT25137NP-R</b>	<b>Patch</b>	<b>13/7</b>



#### Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the “Justification for worst Case test Configuration” section of this report for further details on the selection of EUT samples.

##### 4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP3502P-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-PWR-B	341-0306-01	Cisco Systems	NA	NA	NA	
S03	AIR-ANT2430V-R						
S04	AIR-ANT2440NV-R						
S05	AIR-ANT2460NP-R						
S06	AIR-ANT1949						
S07	AIR-ANT25137NP-R						

##### 4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

##### 4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting



## Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

### Average Output Power

Connect the antenna(s) to the power meter at the average power sensor input. Configure the power meter to measure average power for the transmitter frequencies listed below (enter all losses between the transmitter output and the power meter).

Place the radio in continuous transmit mode and record the reading on the power meter.

Frequency	Mode	Data Rate	Target Power Level			Actual Power Level
			Tx A	Tx B	Total	Total
2412	Legacy CCK, Single Tx Path	11	20	Off	20	<b>20.51</b>
2412	Legacy CCK, Dual Tx Path	11	18	18	21	<b>20.87</b>
2412	Non HT-20, Single Tx Path	54	17	Off	17	<b>17.28</b>
2412	Non HT-20, Dual Tx Path	54	16	16	19	<b>19.10</b>
2412	Non HT-20 Beam Forming	54	13	13	16	<b>16.46</b>
2437	Legacy CCK, Dual Tx Path	11	20	20	23	<b>23.01</b>
2437	Non HT-20 Beam Forming	54	17	17	20	<b>19.70</b>
2462	Legacy CCK, Single Tx Path	11	20	Off	20	<b>20.15</b>
2462	Legacy CCK, Dual Tx Path	11	18	18	21	<b>20.98</b>
2462	Non HT-20, Single Tx Path	54	17	Off	17	<b>16.91</b>
2462	Non HT-20, Dual Tx Path	54	14	14	17	<b>17.47</b>
2462	Non HT-20 Beam Forming	54	11	11	14	<b>14.46</b>
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	12	Off	12	<b>12.51</b>
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	10	10	13	<b>13.79</b>
2412/2432	HT-40, Single Tx Path	M7	14	Off	14	<b>14.18</b>
2412/2432	HT-40, Dual Tx Path	M7	12	12	15	<b>15.25</b>
2427/2447	Non HT-40 Duplicate	54	17	17	20	<b>20.97</b>
2427/2447	HT-40	M7	17	17	20	<b>20.22</b>
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	12	Off	12	<b>12.22</b>
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	10	10	13	<b>13.73</b>
2442/2462	HT-40, Single Tx Path	M7	14	Off	14	<b>13.97</b>
2442/2462	HT-40, Dual Tx Path	M7	12	12	15	<b>15.44</b>





## 6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).


Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	100 kHz
X dB Bandwidth:	6 dB
Detector:	Peak
Trace:	Single

Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:


Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
2412	Legacy CCK, Single Tx Path	11	9.6	>500	9.1
2412	Legacy CCK, Dual Tx Path	11	6.1	>500	5.6
2412	Non HT-20, Single Tx Path	54	16.5	>500	16.0
2412	Non HT-20, Dual Tx Path	54	16.6	>500	16.1
2412	Non HT-20 Beam Forming	54	16.6	>500	16.1
2437	Legacy CCK, Dual Tx Path	11	9.5	>500	9.0
2437	Non HT-20 Beam Forming	54	15.8	>500	15.3
2462	Legacy CCK, Single Tx Path	11	9.6	>500	9.1
2462	Legacy CCK, Dual Tx Path	11	9.6	>500	9.1
2462	Non HT-20, Single Tx Path	54	16.5	>500	16.0
2462	Non HT-20, Dual Tx Path	54	16.6	>500	16.1
2462	Non HT-20 Beam Forming	54	15.8	>500	15.3
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	35.8	>500	35.3
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	36.4	>500	35.9
2412/2432	HT-40, Single Tx Path	M7	35.9	>500	35.4
2412/2432	HT-40, Dual Tx Path	M7	35.8	>500	35.3
2427/2447	Non HT-40 Duplicate	54	29.0	>500	28.5
2427/2447	HT-40	M7	35.7	>500	35.2
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	35.9	>500	35.4
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	35.6	>500	35.1
2442/2462	HT-40, Single Tx Path	M7	35.9	>500	35.4
2442/2462	HT-40, Dual Tx Path	M7	33.7	>500	33.2



6dB Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

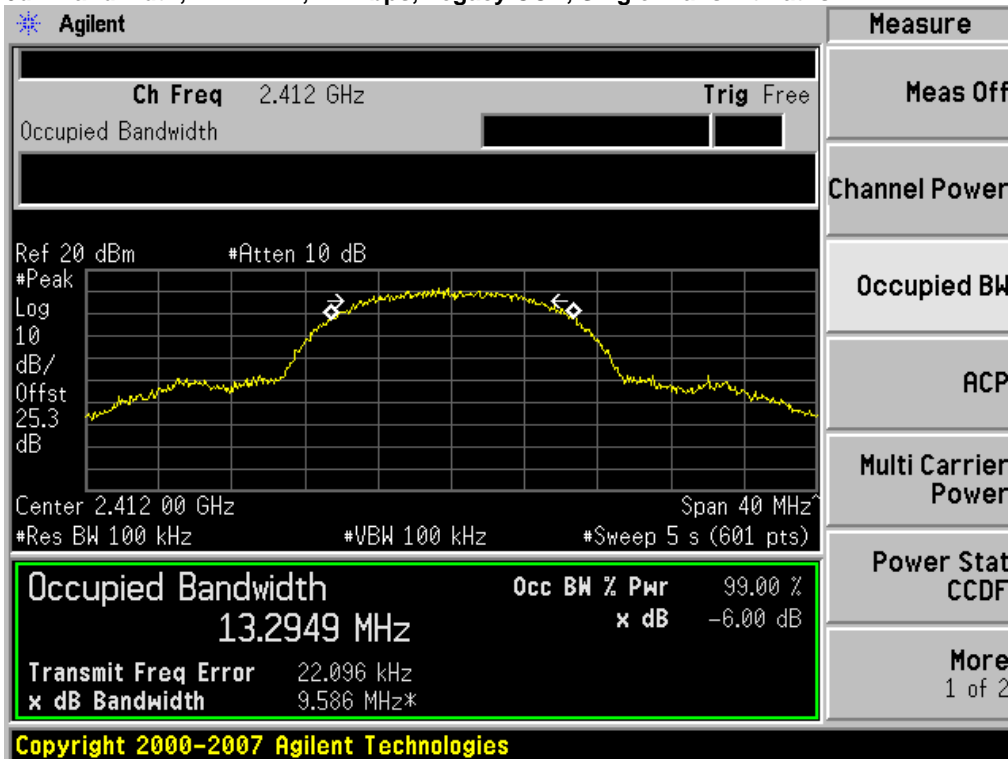

6dB Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

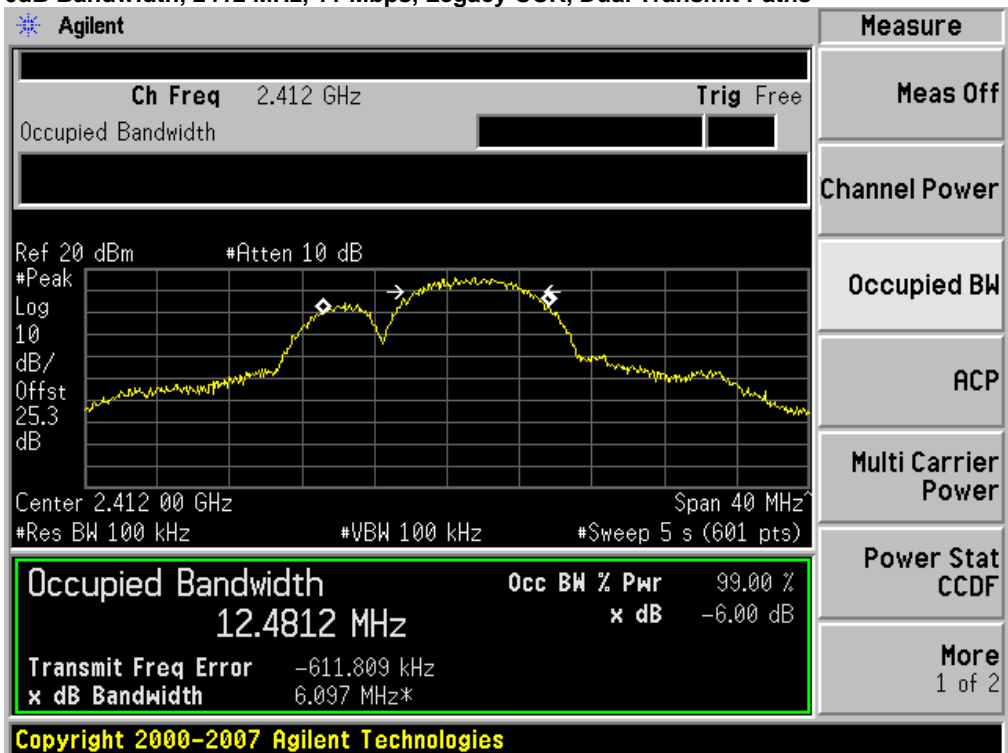



6dB Bandwidth, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths

Agilent
Measure

Ch Freq 2.412 GHz
Trig Free

Occupied Bandwidth

Ref 20 dBm
#Atten 10 dB

#Peak
Log

10
dB/

Offst
25.3

dB

Center 2.412 00 GHz
Span 40 MHz

#Res BW 100 kHz
#VBW 100 kHz
#Sweep 5 s (601 pts)

Occupied Bandwidth
Occ BW % Pwr

16.4333 MHz
99.00 %

Transmit Freq Error
15.697 kHz

x dB Bandwidth
16.527 MHz\*

x dB
-6.00 dB

Power Stat
CCDF

More
1 of 2

Copyright 2000-2007 Agilent Technologies

6dB Bandwidth, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths

Agilent
Measure

Ch Freq 2.412 GHz
Trig Free

Occupied Bandwidth

Ref 20 dBm
#Atten 10 dB

#Peak
Log

10
dB/

Offst
25.3

dB

Center 2.412 00 GHz
Span 40 MHz

#Res BW 100 kHz
#VBW 100 kHz
#Sweep 5 s (601 pts)

Occupied Bandwidth
Occ BW % Pwr

16.4887 MHz
99.00 %

Transmit Freq Error
17.307 kHz

x dB Bandwidth
16.562 MHz\*

x dB
-6.00 dB


Power Stat
CCDF

More
1 of 2


Copyright 2000-2007 Agilent Technologies



6dB Bandwidth, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

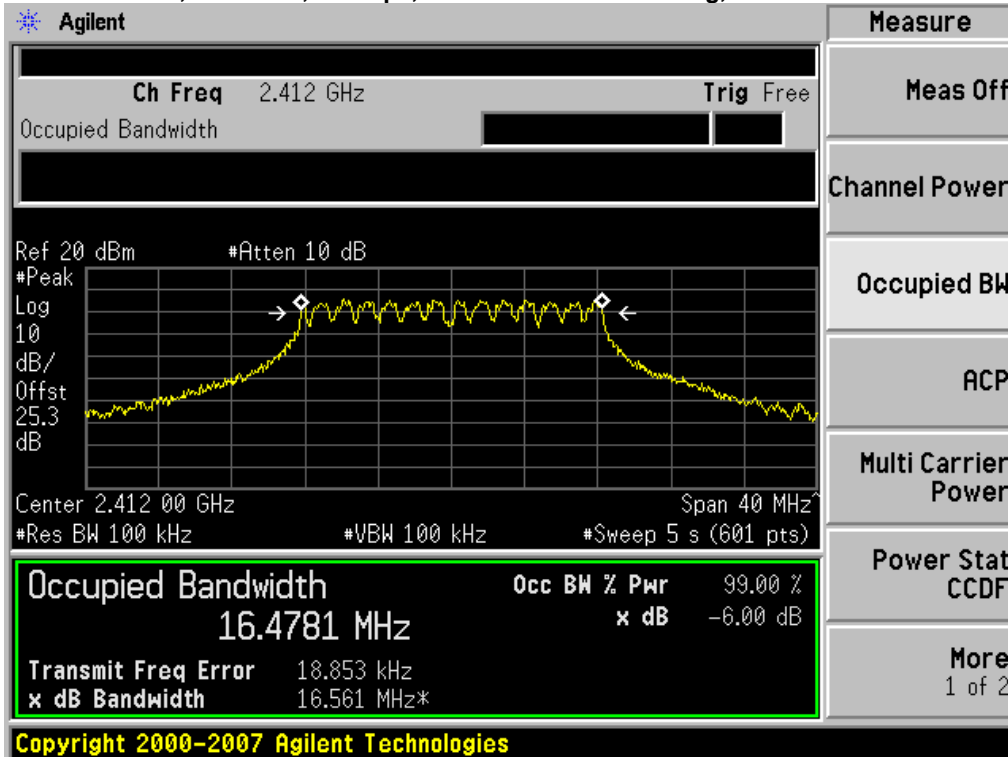


6dB Bandwidth, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

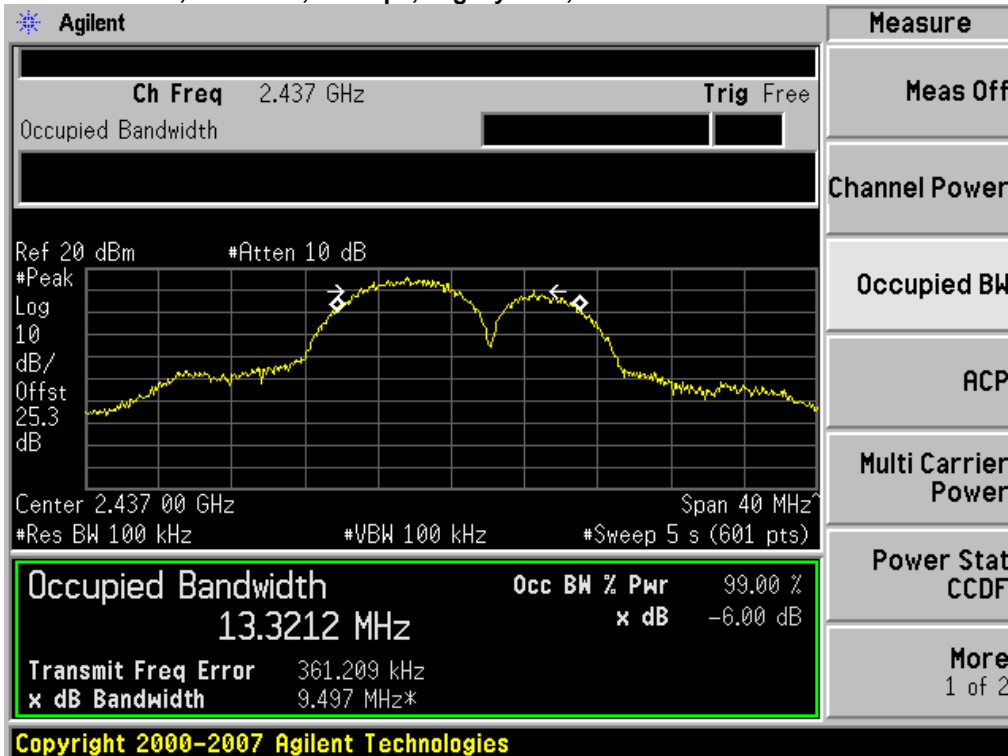




6dB Bandwidth, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

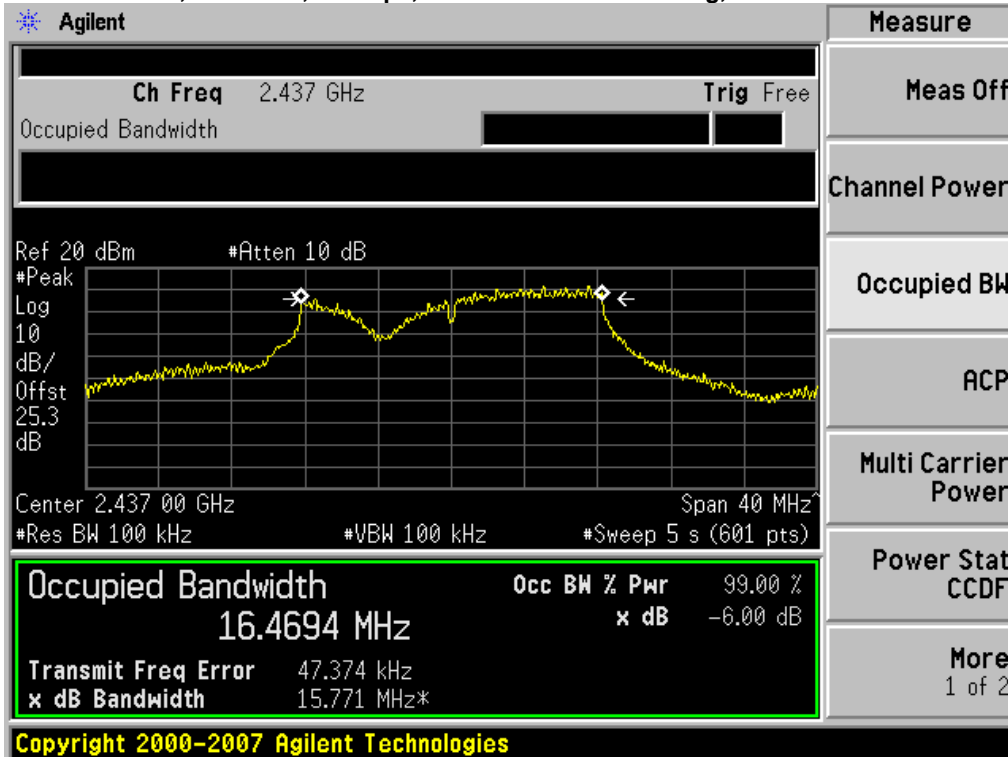


6dB Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

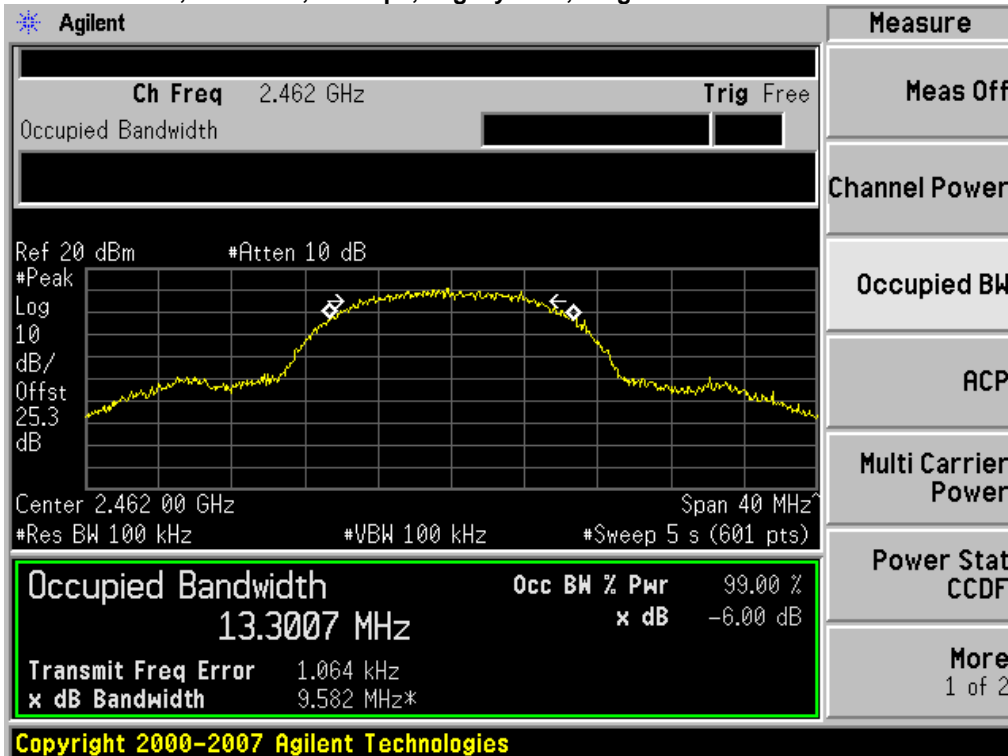




6dB Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

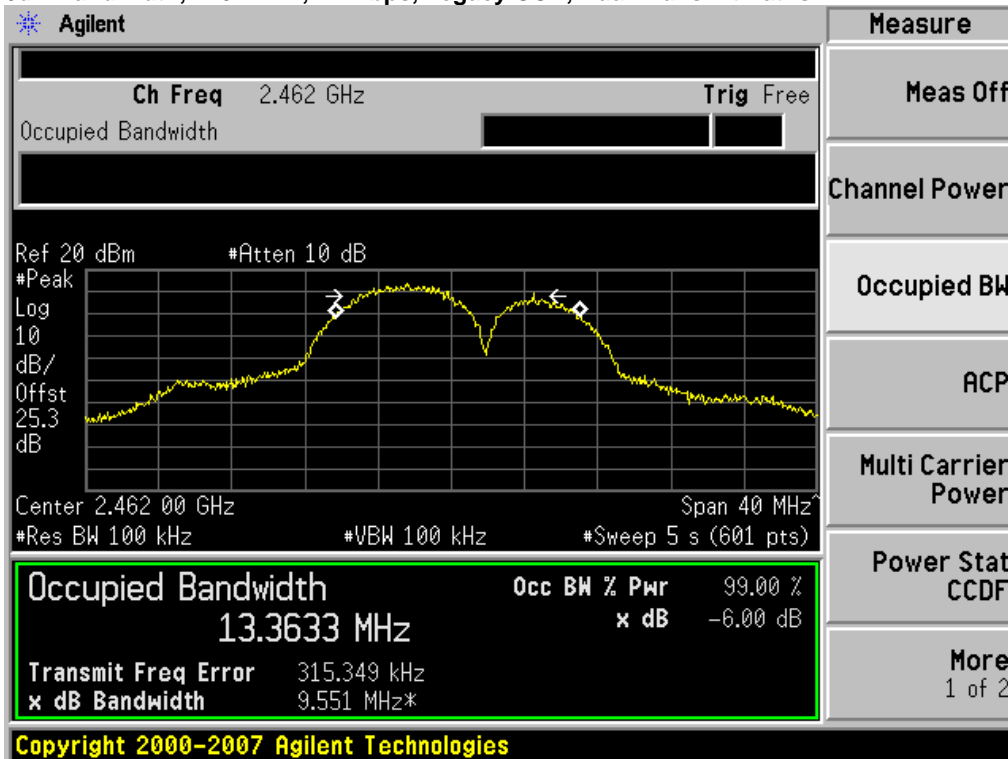

6dB Bandwidth, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths

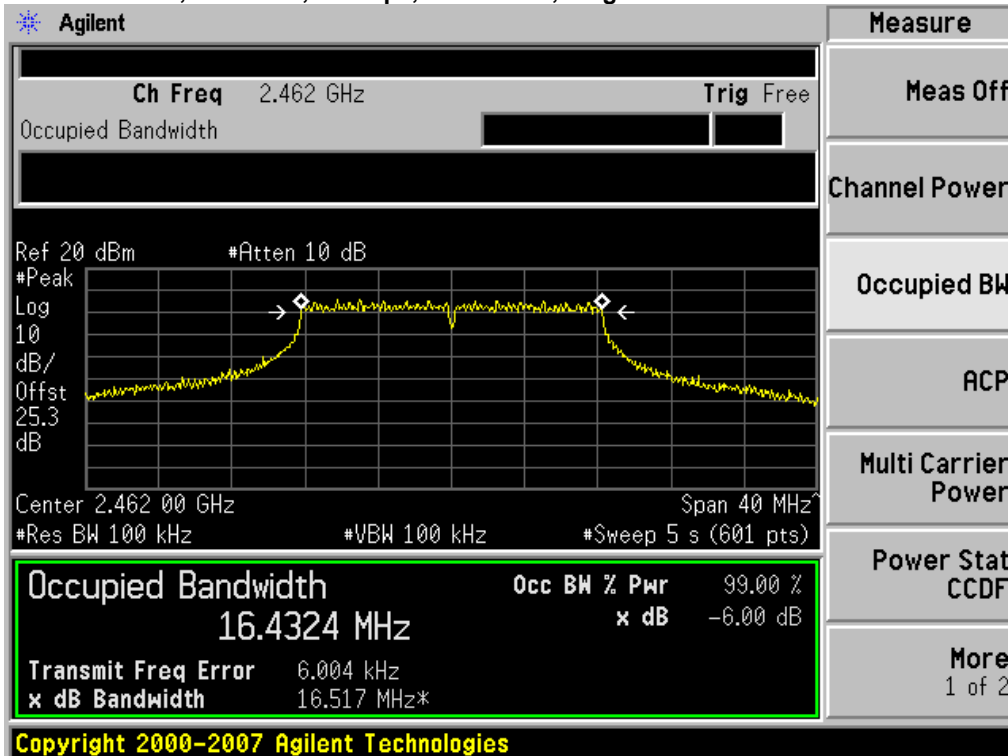



6dB Bandwidth, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths

**Agilent**

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm #Atten 10 dB

Center 2.462 00 GHz Span 40 MHz

#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
16.4842 MHz	x dB	-6.00 dB
Transmit Freq Error	1.910 kHz	
x dB Bandwidth	16.574 MHz*	

Copyright 2000-2007 Agilent Technologies

**Measure**

Meas Off

Channel Power

Occupied BW

ACP

Multi Carrier Power

Power Stat CCDF

More  
1 of 2

6dB Bandwidth, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

**Agilent**

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm #Atten 10 dB

Center 2.462 00 GHz Span 40 MHz

#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
16.3183 MHz	x dB	-6.00 dB
Transmit Freq Error	-28.614 kHz	
x dB Bandwidth	15.804 MHz*	

Copyright 2000-2007 Agilent Technologies

**Measure**

Meas Off

Channel Power

Occupied BW

ACP


Multi Carrier Power

Power Stat CCDF


More  
1 of 2



6dB Bandwidth, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths

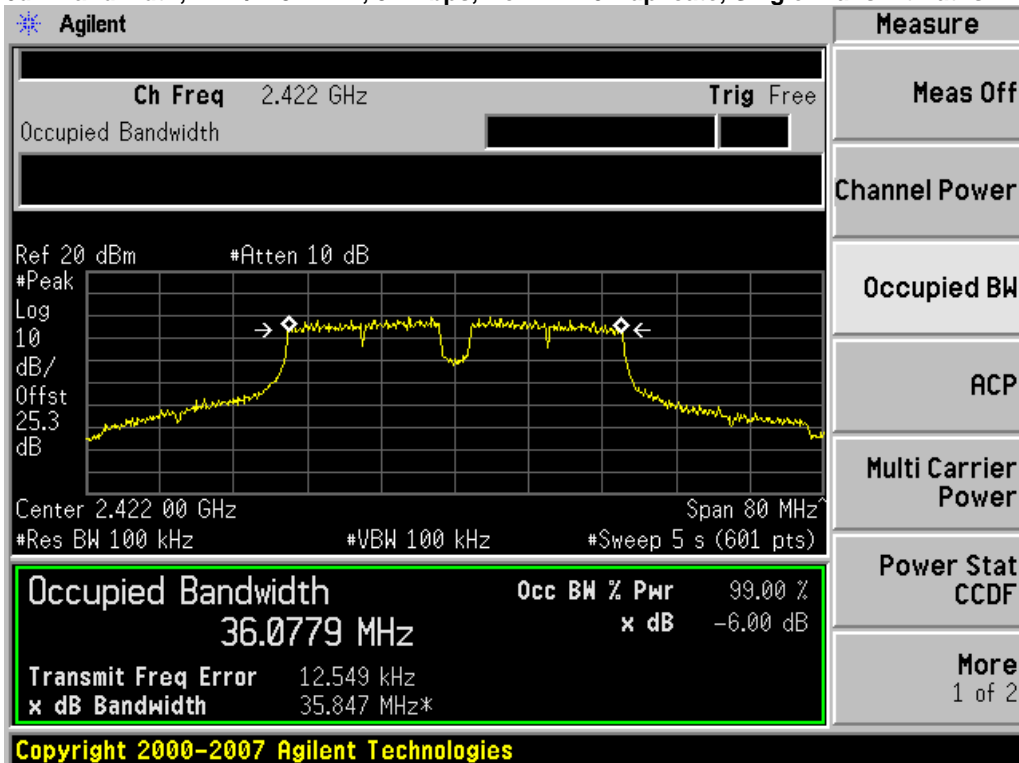


6dB Bandwidth, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

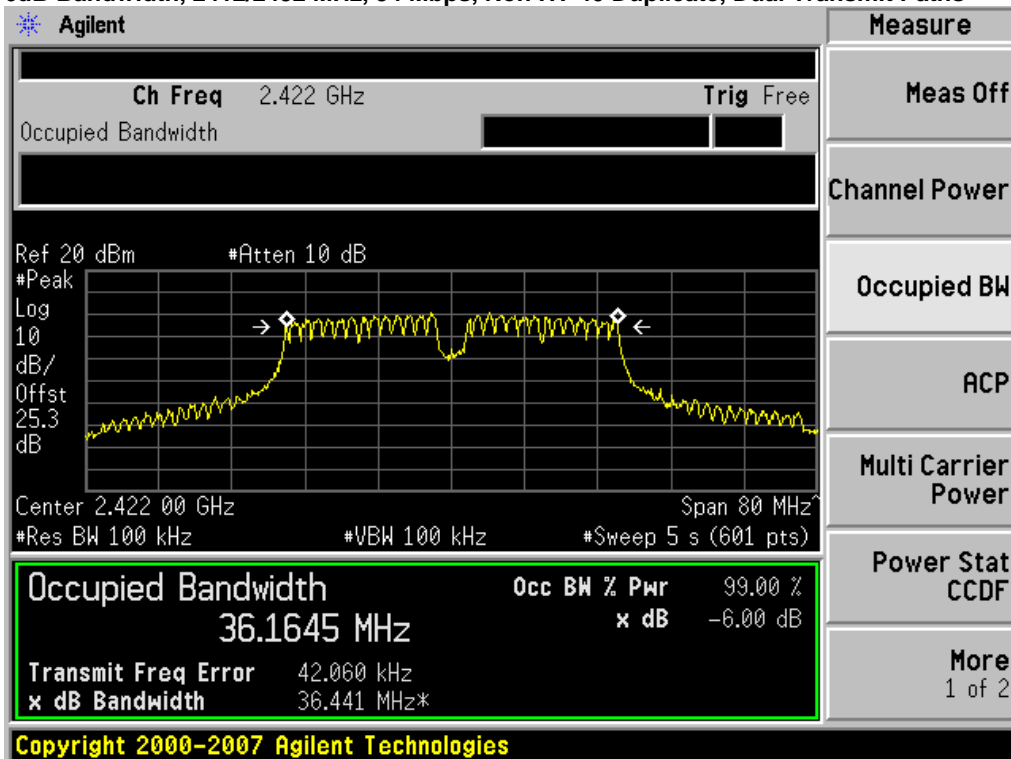






6dB Bandwidth, 2412/2432 MHz, M7, HT-40, Single Transmit Paths

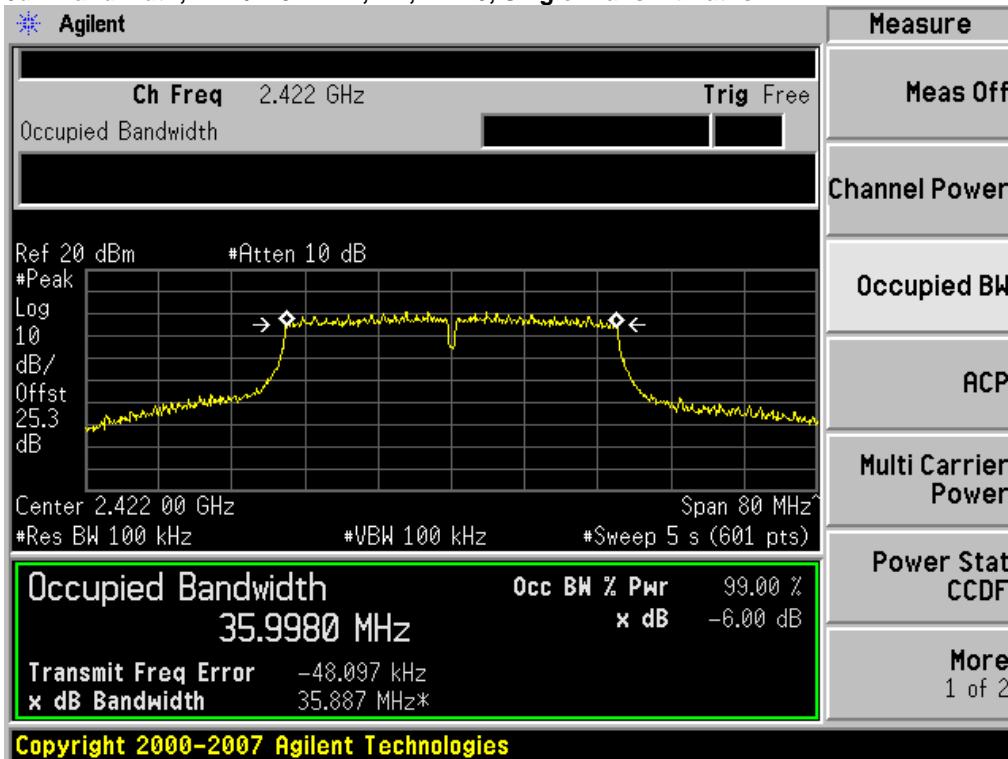


6dB Bandwidth, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths

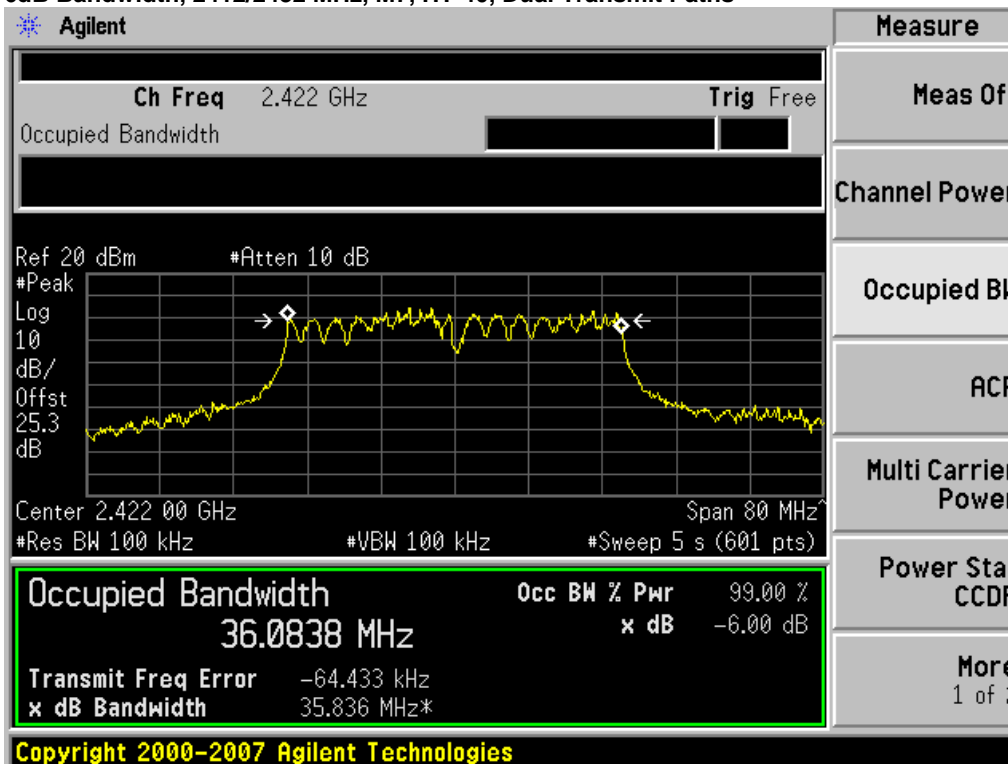




6dB Bandwidth, 2427/2447 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

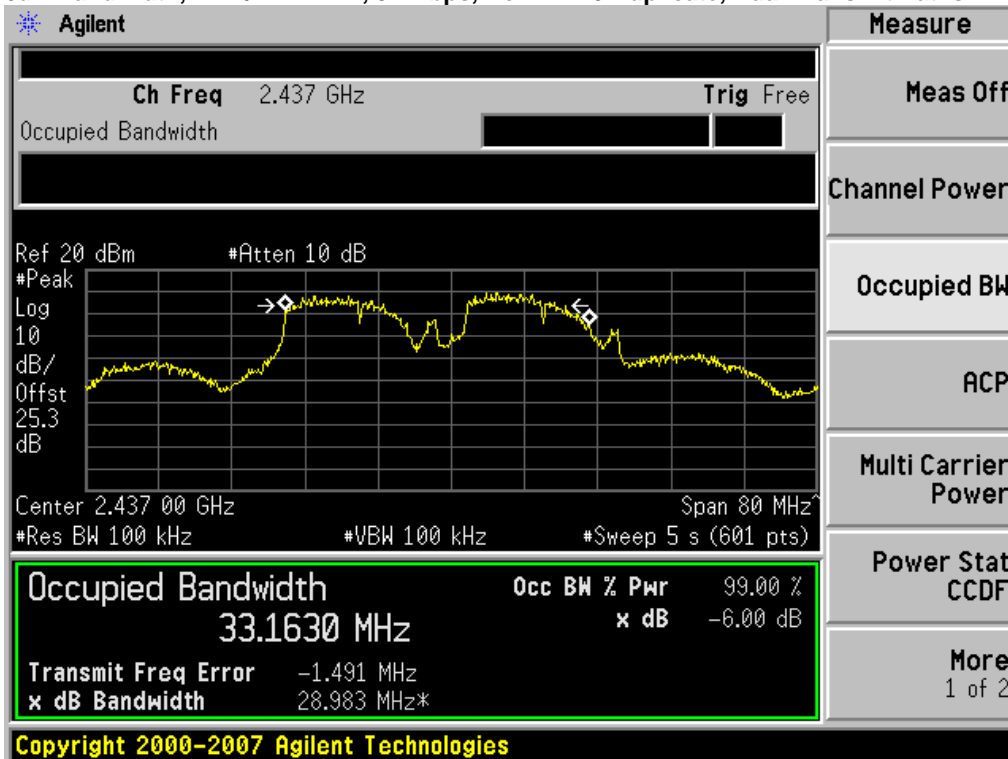


6dB Bandwidth, 2427/2447 MHz, M7, HT-40, Dual Transmit Paths

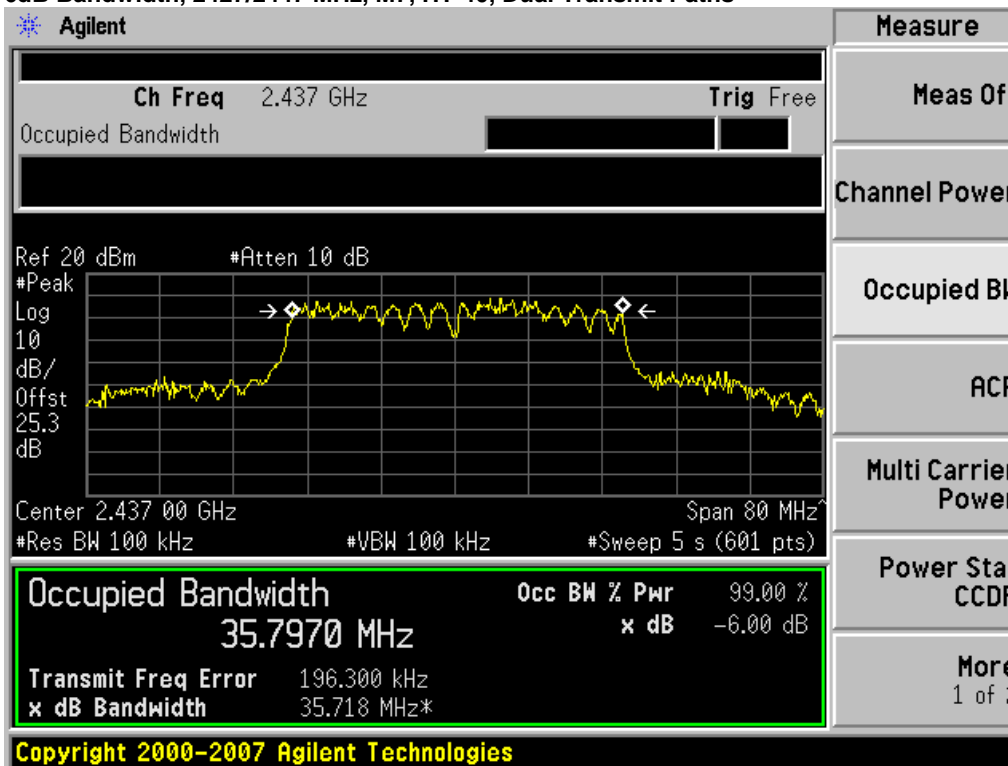




6dB Bandwidth, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths

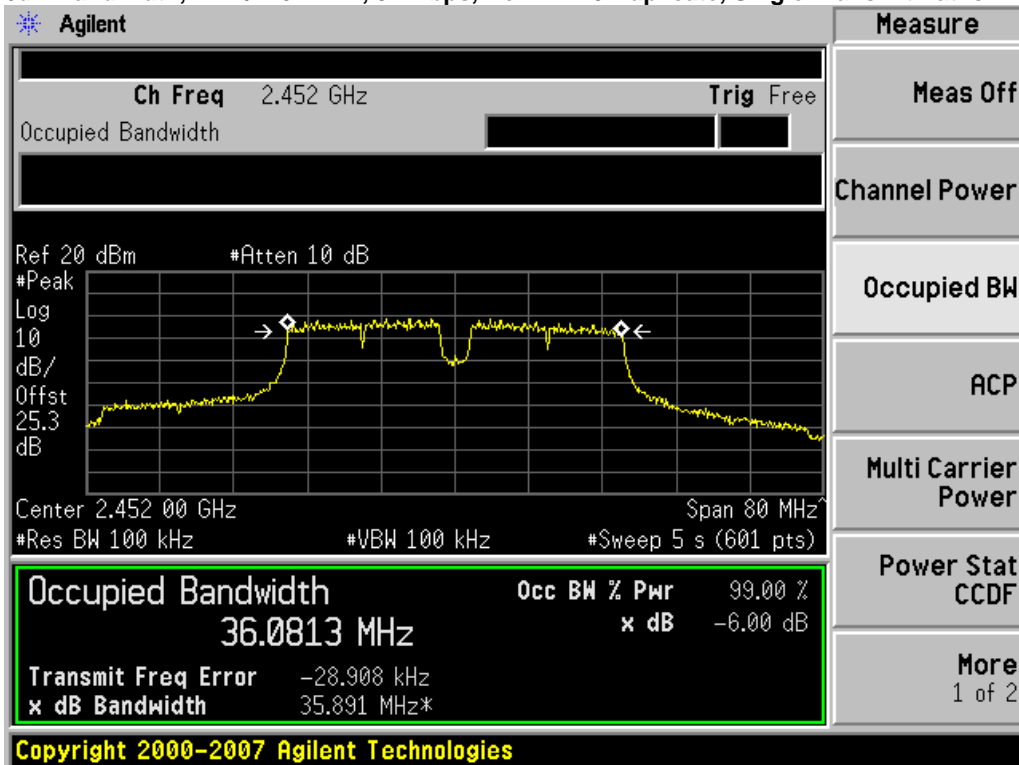

6dB Bandwidth, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

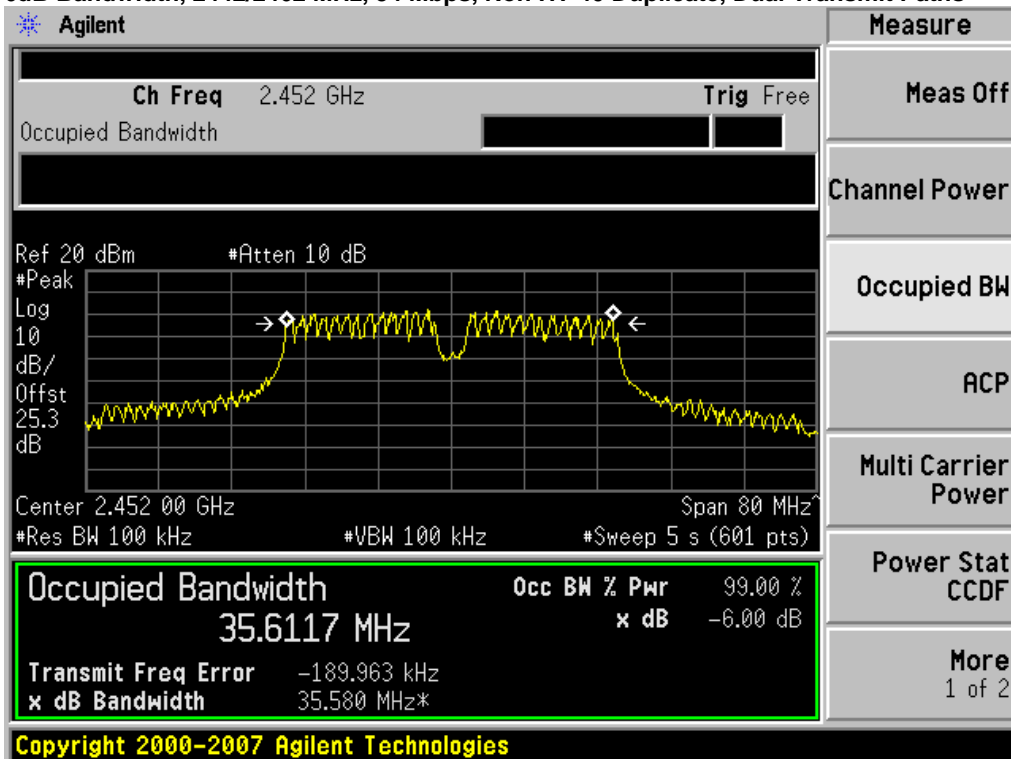



6dB Bandwidth, 2442/2462 MHz, M7, HT-40, Single Transmit Paths

**Agilent**

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm #Atten 10 dB

#Peak Log 10 dB/Offst 25.3 dB

Center 2.452 00 GHz Span 80 MHz  
#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
35.9963 MHz	x dB	-6.00 dB
<b>Transmit Freq Error</b>	-82.932 kHz	
<b>x dB Bandwidth</b>	35.929 MHz*	

Copyright 2000-2007 Agilent Technologies

**Measure**

Meas Off

Channel Power

Occupied BW

ACP

Multi Carrier Power

Power Stat CCDF

More  
1 of 2

6dB Bandwidth, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths

**Agilent**

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm #Atten 10 dB

#Peak Log 10 dB/Offst 25.3 dB

Center 2.452 00 GHz Span 80 MHz  
#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
35.8594 MHz	x dB	-6.00 dB
<b>Transmit Freq Error</b>	133.875 kHz	
<b>x dB Bandwidth</b>	33.686 MHz*	

Copyright 2000-2007 Agilent Technologies

**Measure**

Meas Off

Channel Power

Occupied BW

ACP

Multi Carrier Power

Power Stat CCDF

More  
1 of 2



## 99% and 26dB Bandwidth

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).


Center Frequency: Frequency from table below  
 Span: 2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)  
 Reference Level: 20 dBm  
 Attenuation: 10 dB  
 Sweep Time: 5 s  
 Resolution Bandwidth: 1%-3% of 26 dB Bandwidth  
 Video Bandwidth: ≥Resolution Bandwidth  
 X dB Bandwidth: 26 dB  
 Detector: Peak  
 Trace: Single

Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:


Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
2412	Legacy CCK, Single Tx Path	11	16.6	13.4
2412	Legacy CCK, Dual Tx Path	11	16.3	13.6
2412	Non HT-20, Single Tx Path	54	24.1	16.9
2412	Non HT-20, Dual Tx Path	54	23.1	17.0
2412	Non HT-20 Beam Forming	54	23.4	17.0
2437	Legacy CCK, Dual Tx Path	11	16.2	13.4
2437	Non HT-20 Beam Forming	54	20.8	17.0
2462	Legacy CCK, Single Tx Path	11	16.8	13.3
2462	Legacy CCK, Dual Tx Path	11	16.1	13.5
2462	Non HT-20, Single Tx Path	54	23.5	17.0
2462	Non HT-20, Dual Tx Path	54	23.2	17.0
2462	Non HT-20 Beam Forming	54	21.9	16.8
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	44.2	36.4
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	43.0	36.3
2412/2432	HT-40, Single Tx Path	M7	42.4	36.3
2412/2432	HT-40, Dual Tx Path	M7	42.7	36.5
2427/2447	Non HT-40 Duplicate	54	62.0	35.9
2427/2447	HT-40	M7	41.8	36.2
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	44.3	36.4
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	42.5	36.2
2442/2462	HT-40, Single Tx Path	M7	42.6	36.3
2442/2462	HT-40, Dual Tx Path	M7	41.8	36.1



26dB/99% Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

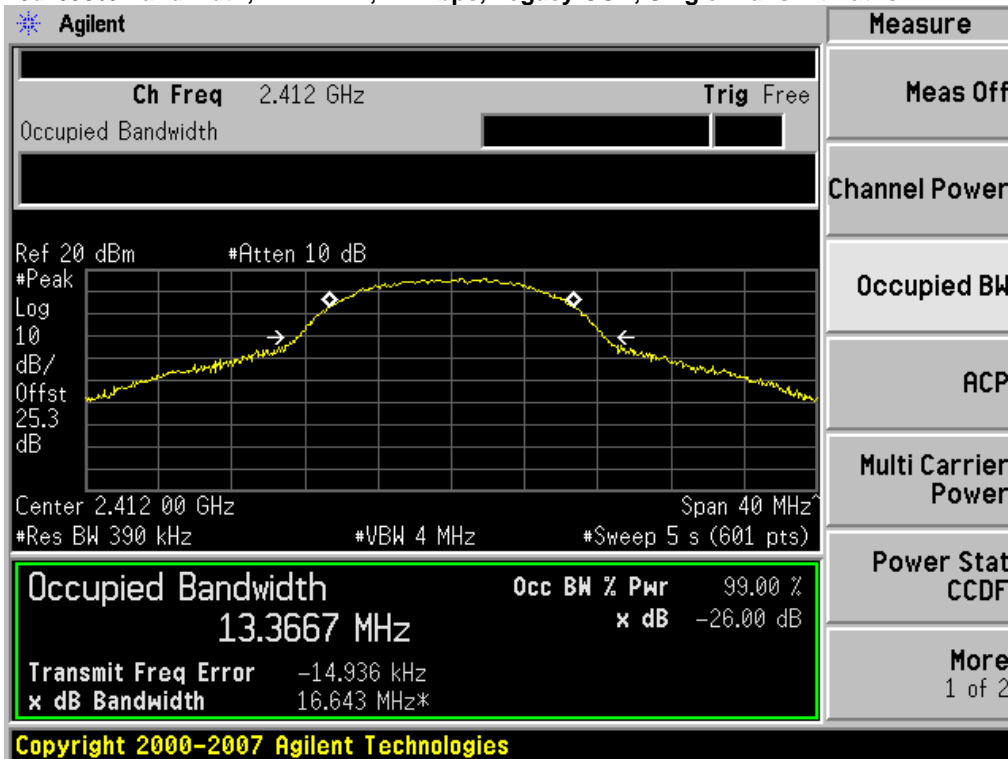


26dB/99% Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

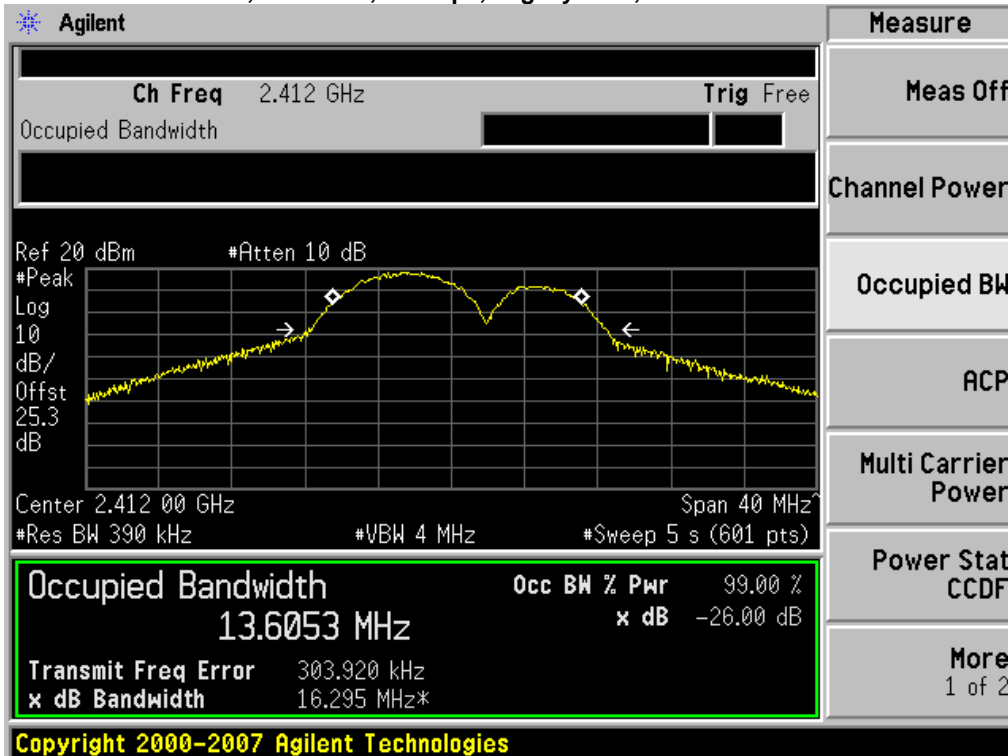




26dB/99% Bandwidth, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths

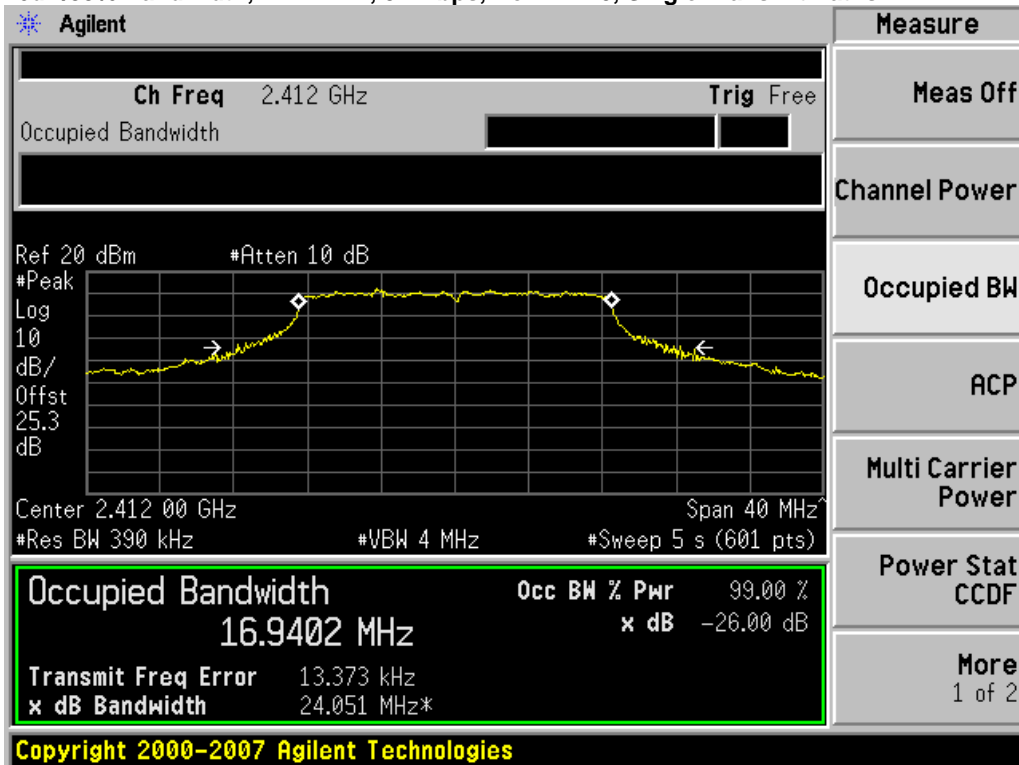


26dB/99% Bandwidth, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths

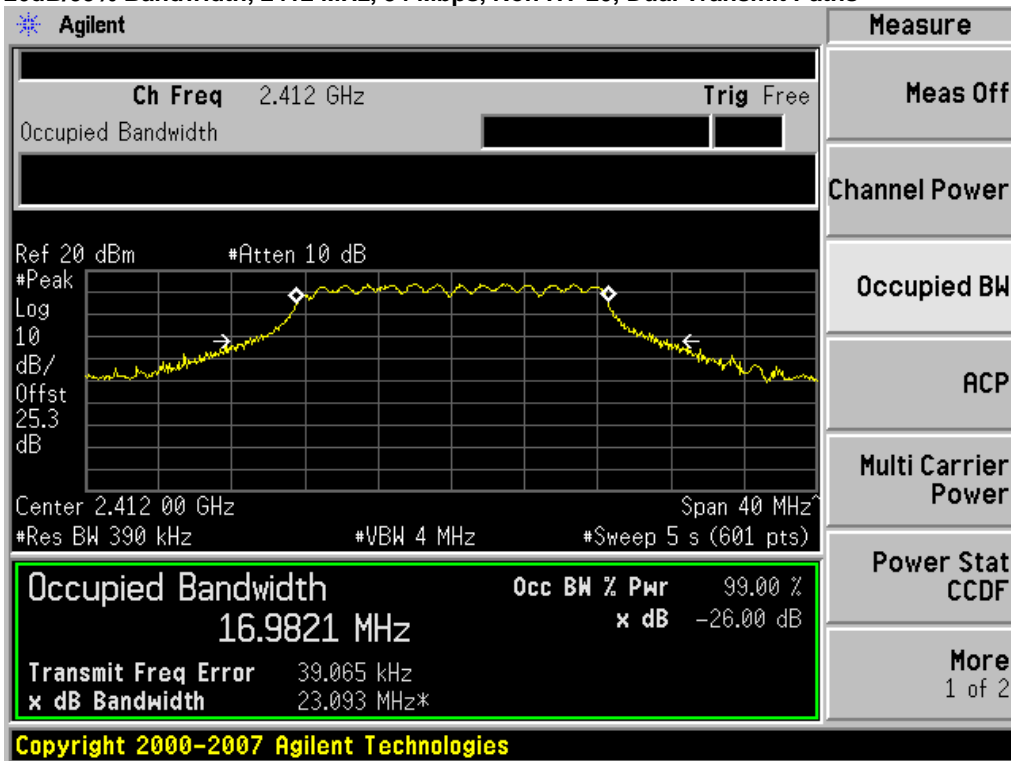




26dB/99% Bandwidth, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

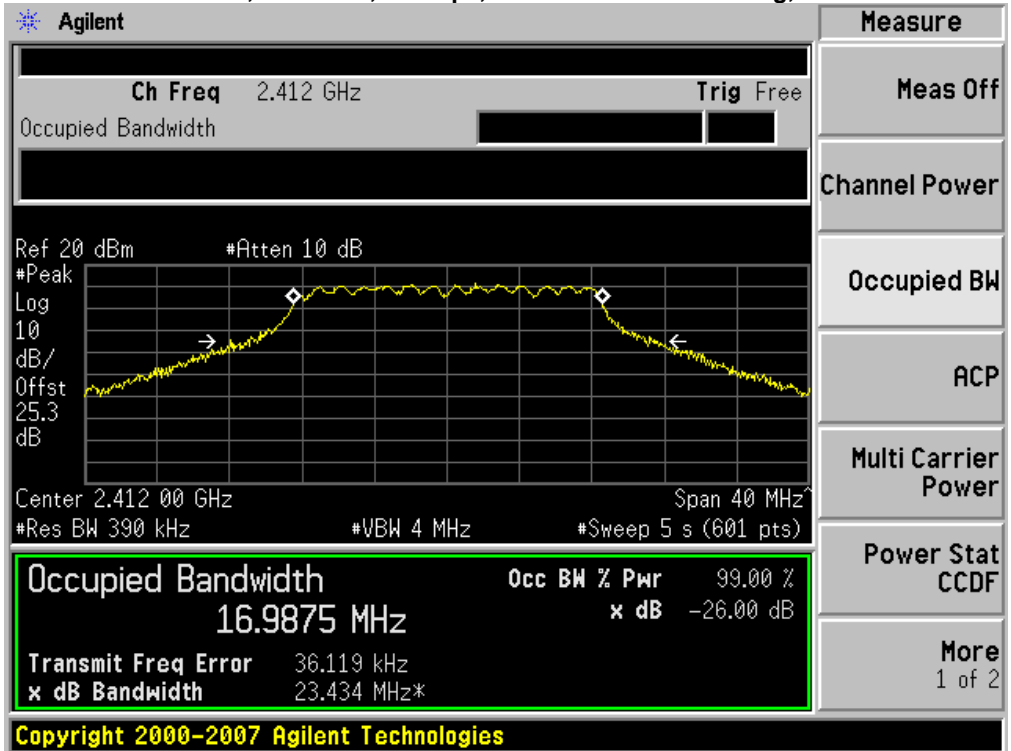


26dB/99% Bandwidth, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

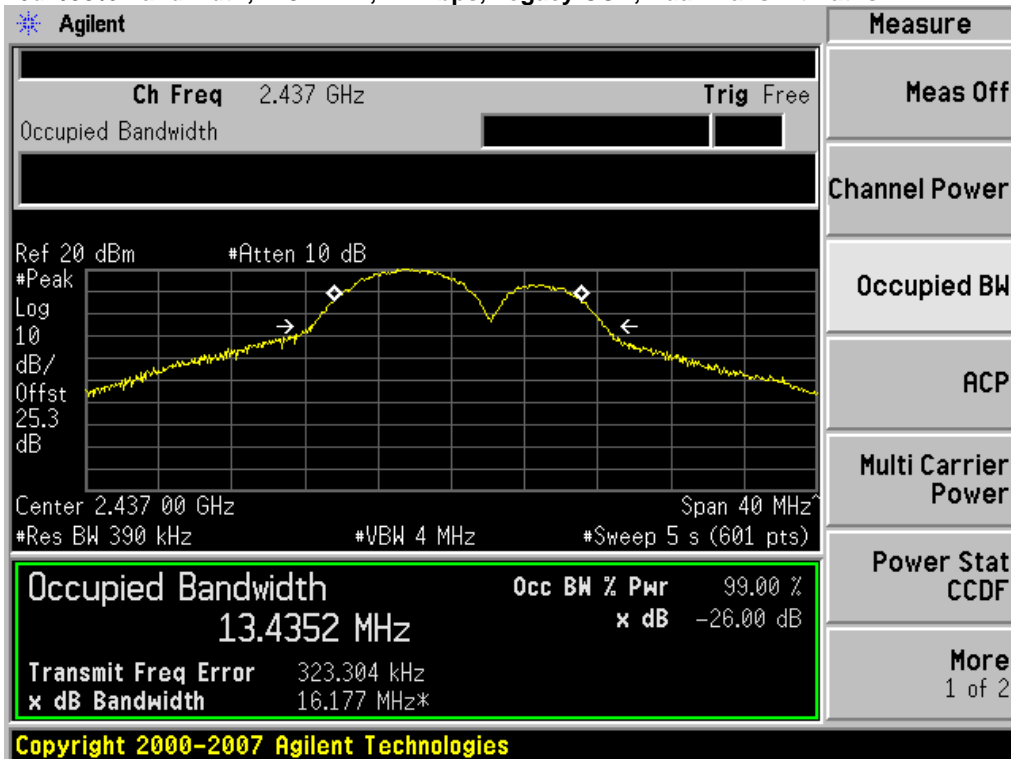






26dB/99% Bandwidth, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

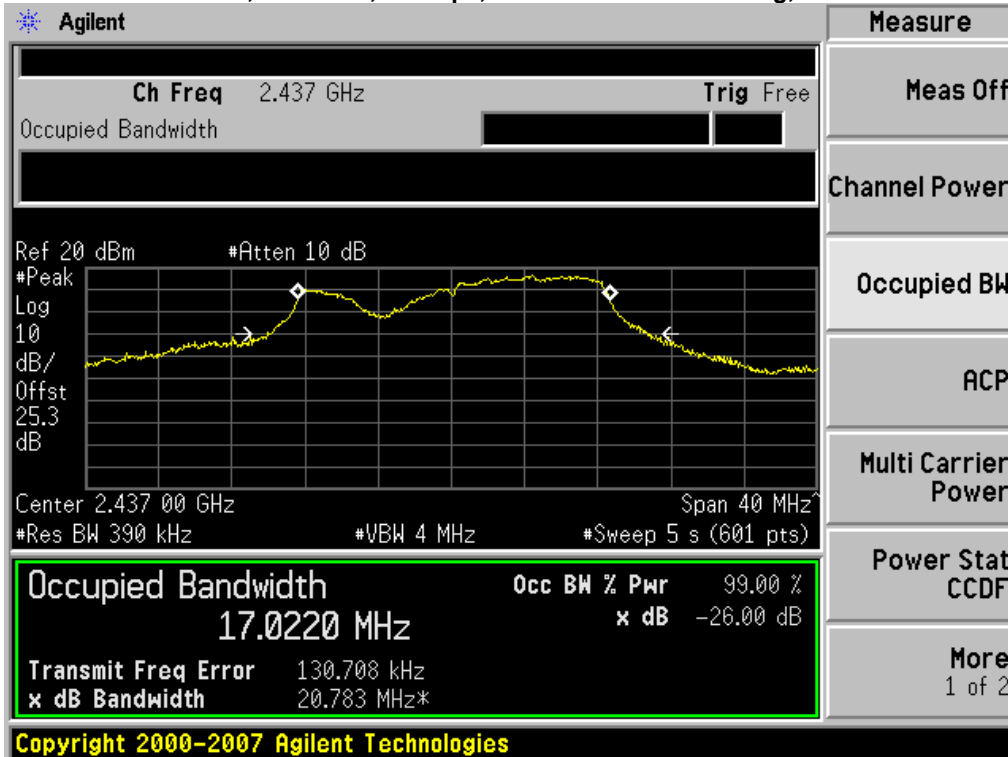


26dB/99% Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

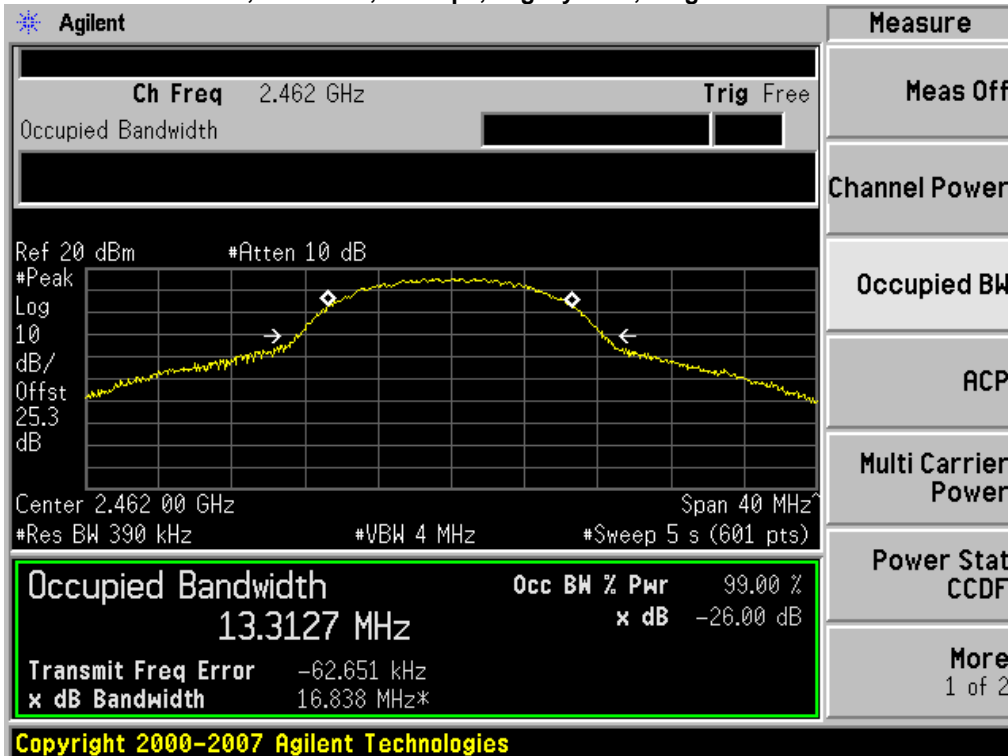




26dB/99% Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

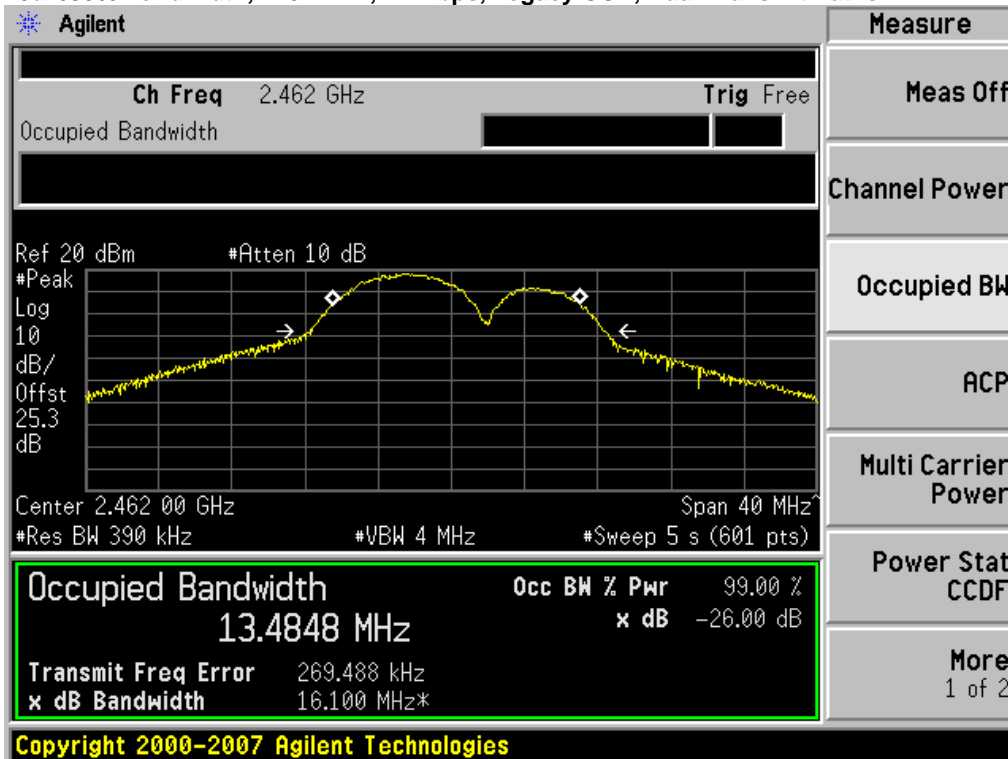


26dB/99% Bandwidth, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths

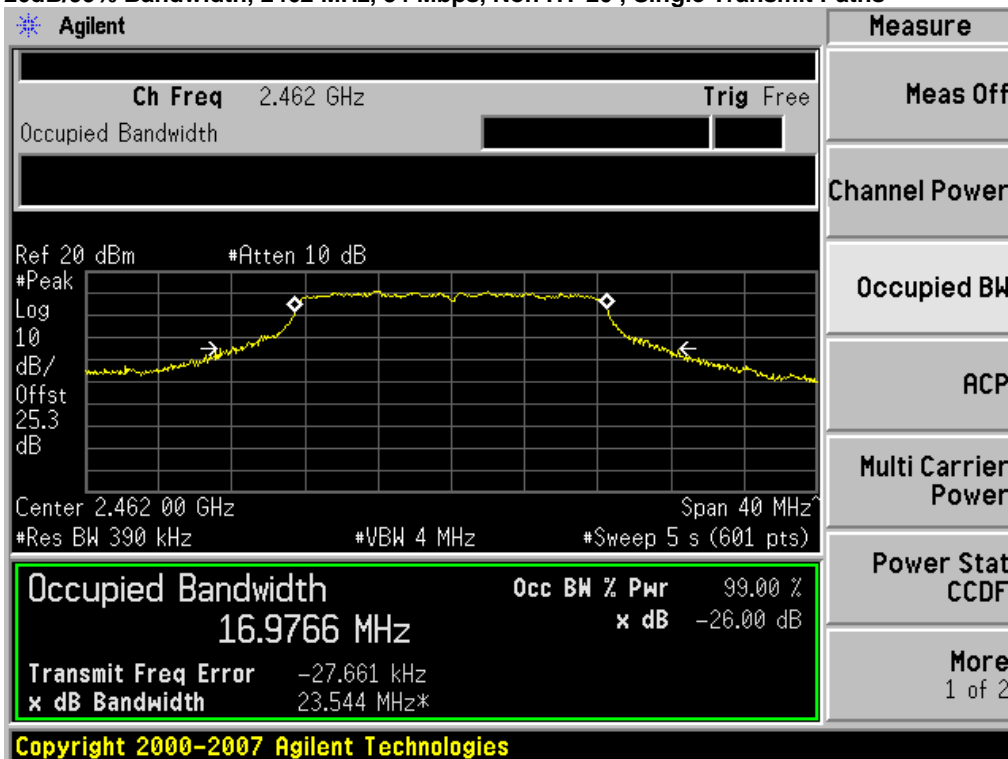




26dB/99% Bandwidth, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths

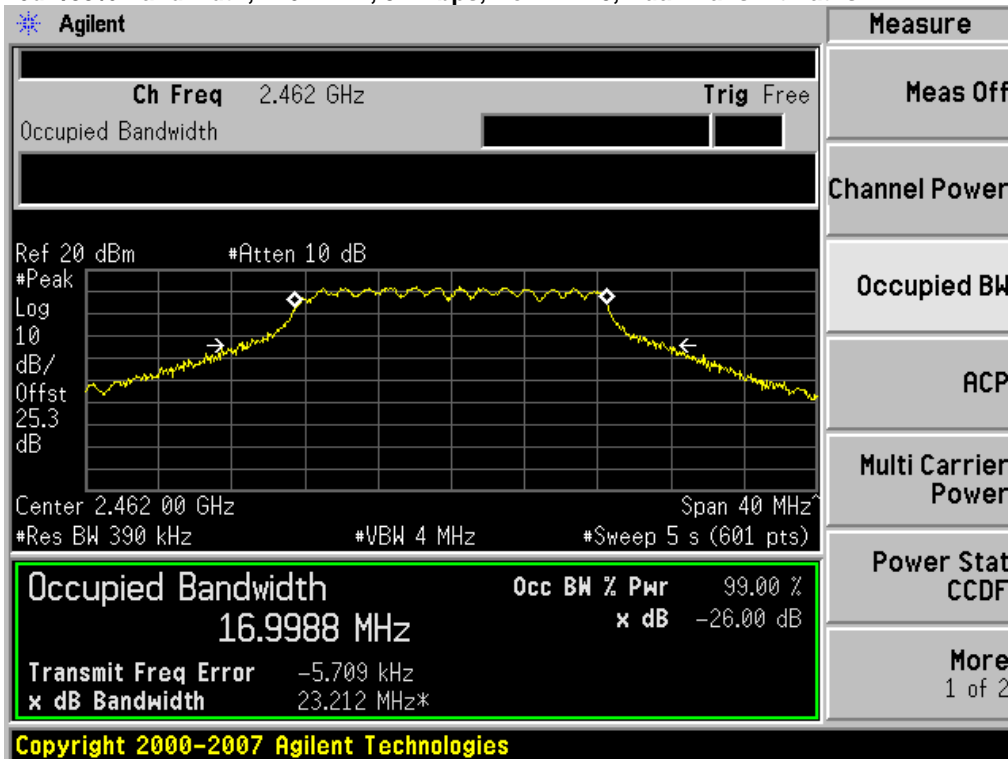


26dB/99% Bandwidth, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

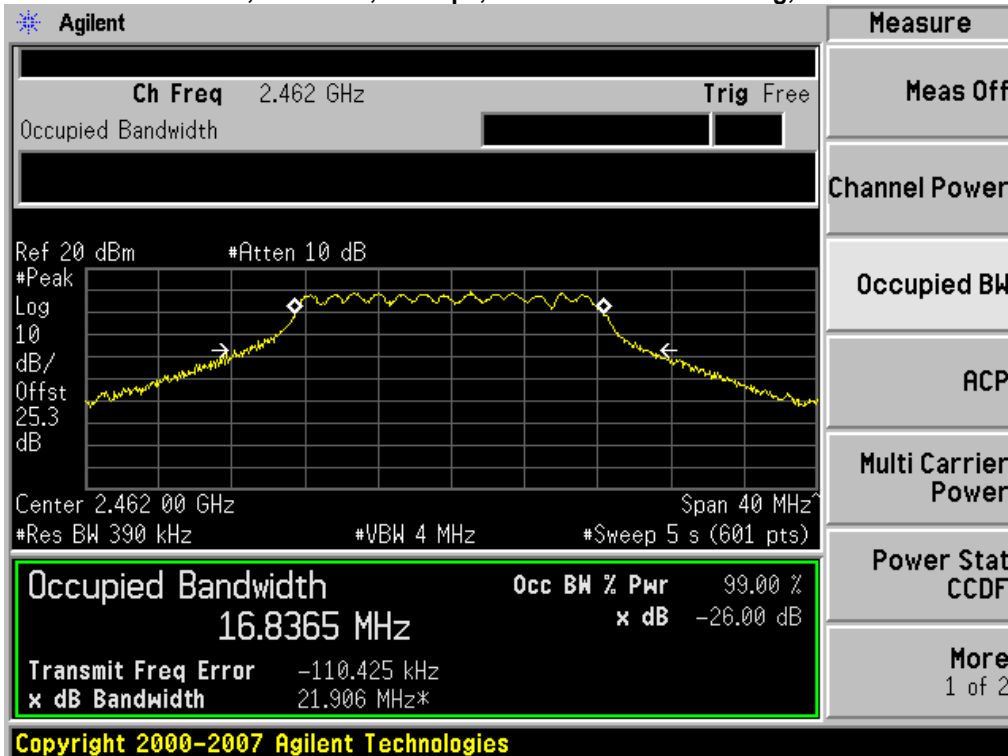




26dB/99% Bandwidth, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths

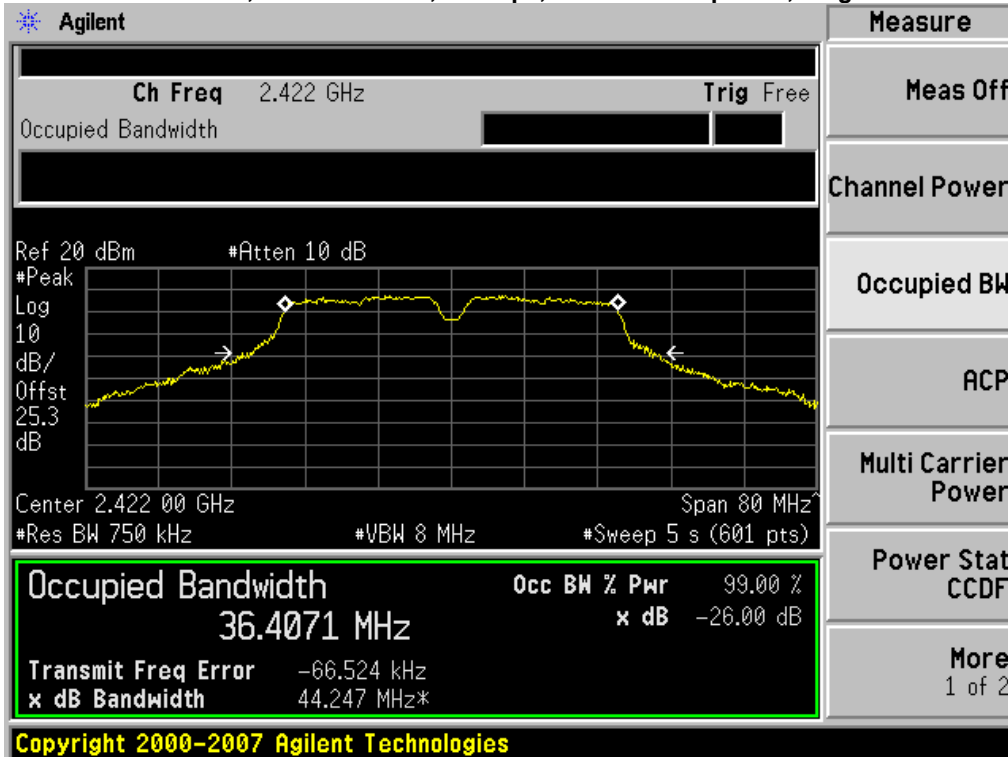


26dB/99% Bandwidth, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

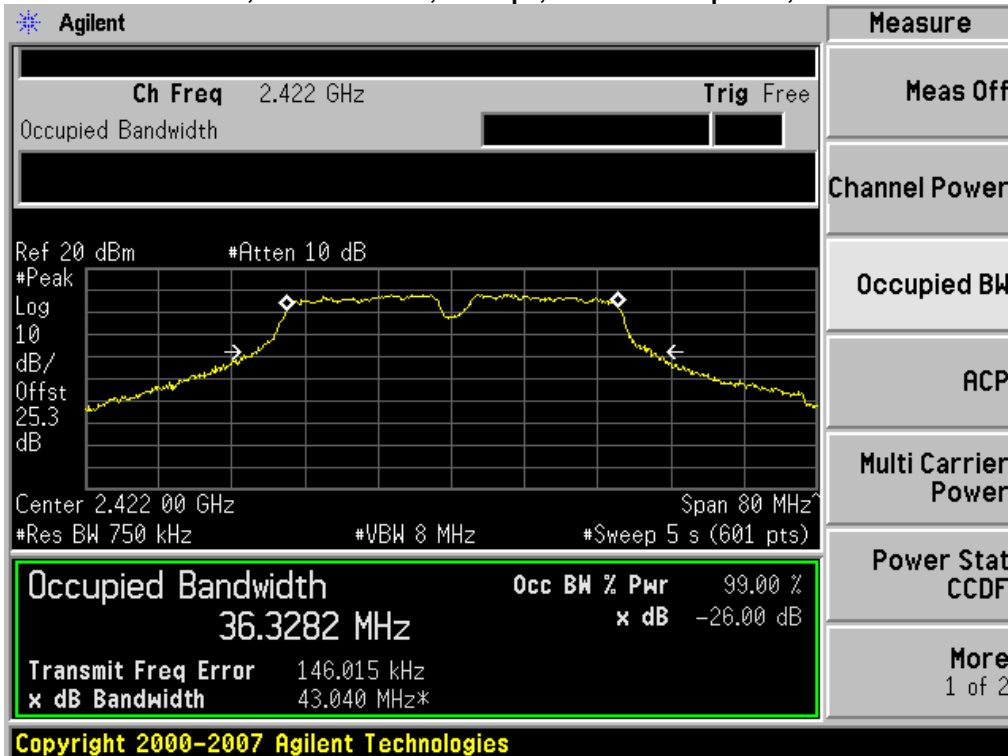




26dB/99% Bandwidth, 2412/2432 MHz, M7, HT-40, Single Transmit Paths

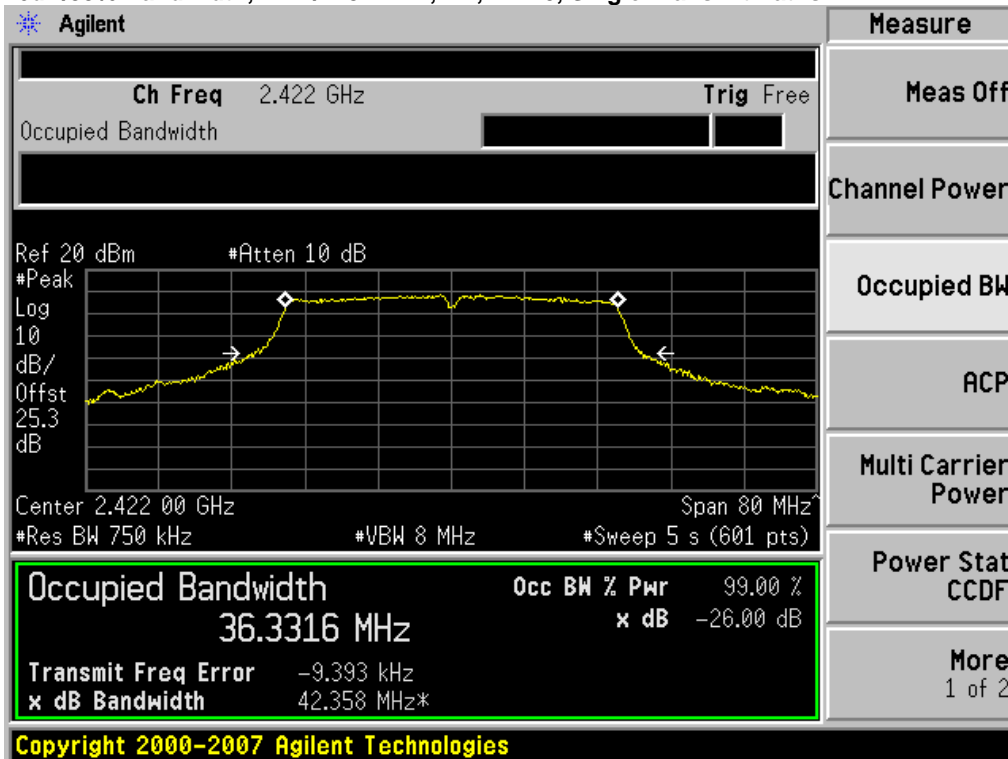


26dB/99% Bandwidth, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths

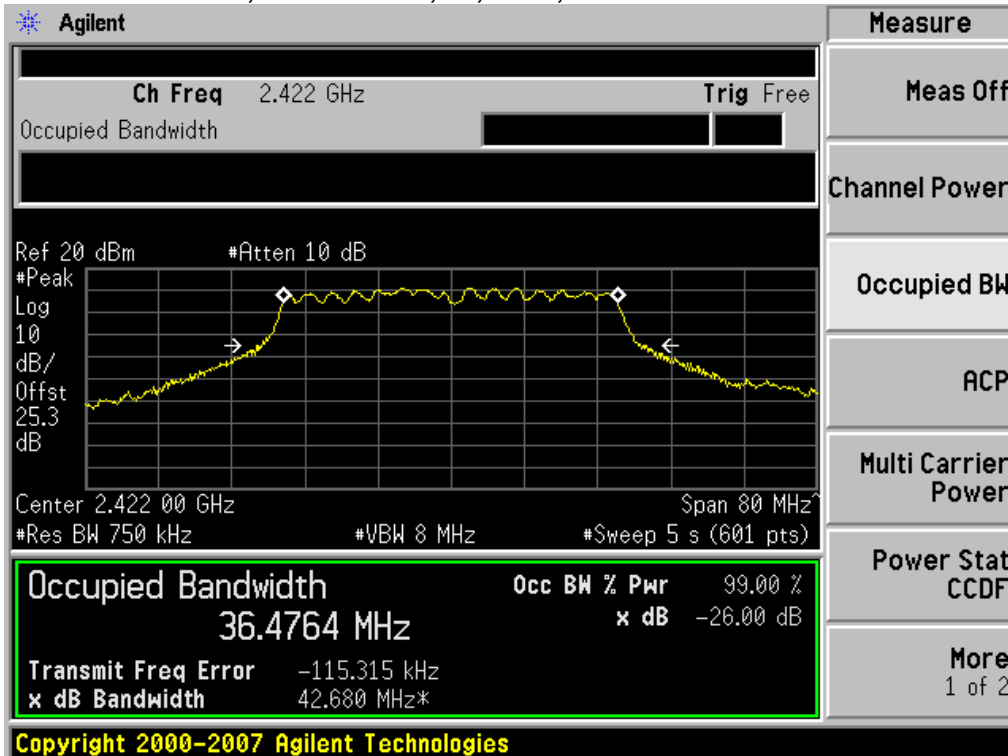




26dB/99% Bandwidth, 2427/2447 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

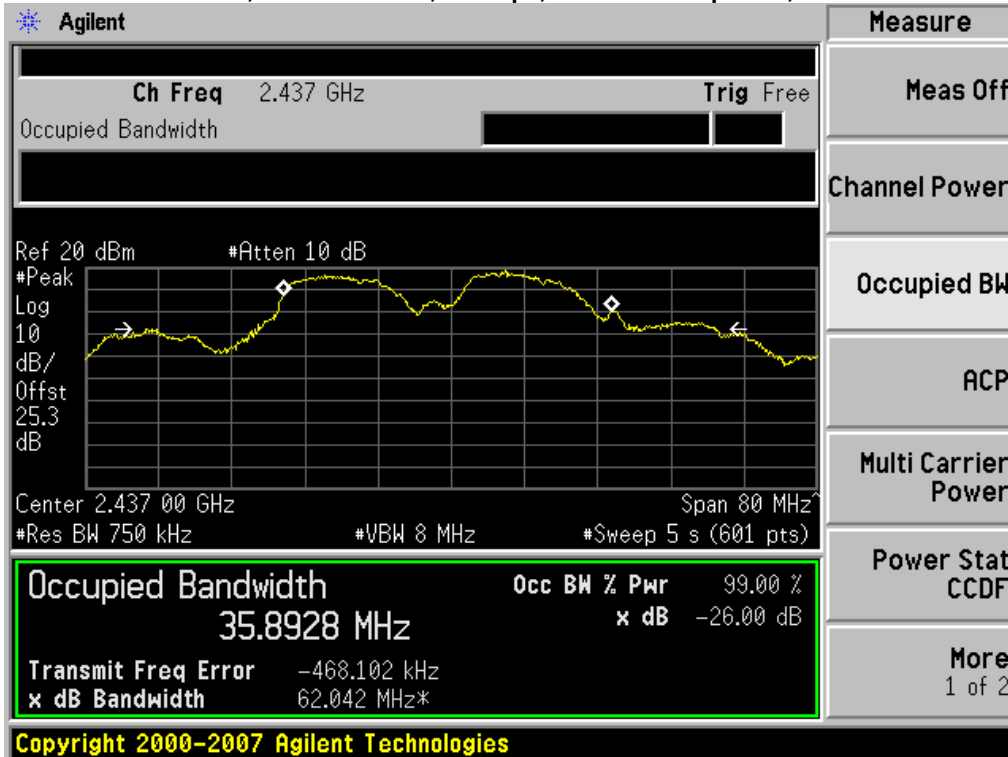


26dB/99% Bandwidth, 2427/2447 MHz, M7, HT-40, Dual Transmit Paths

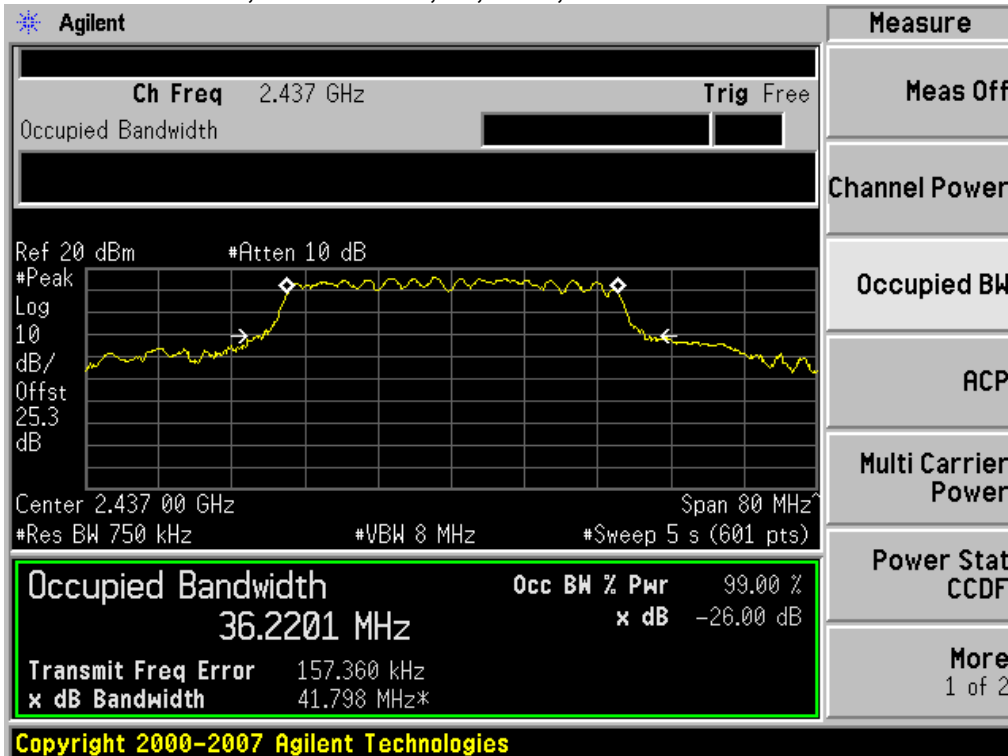




26dB/99% Bandwidth, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths

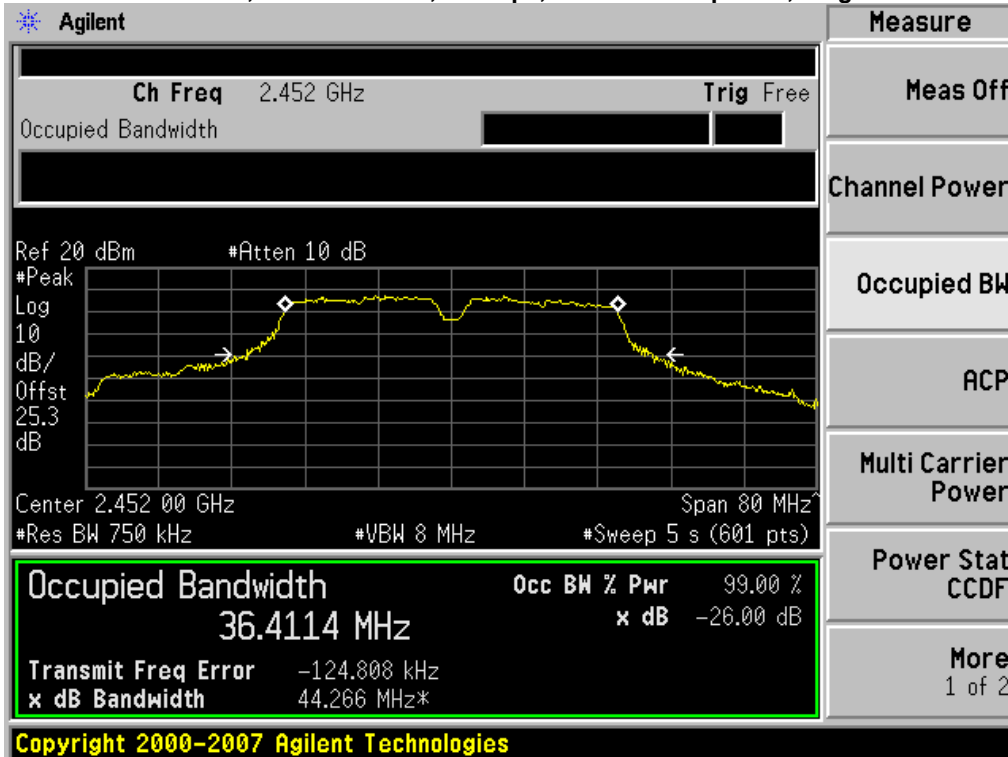


26dB/99% Bandwidth, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

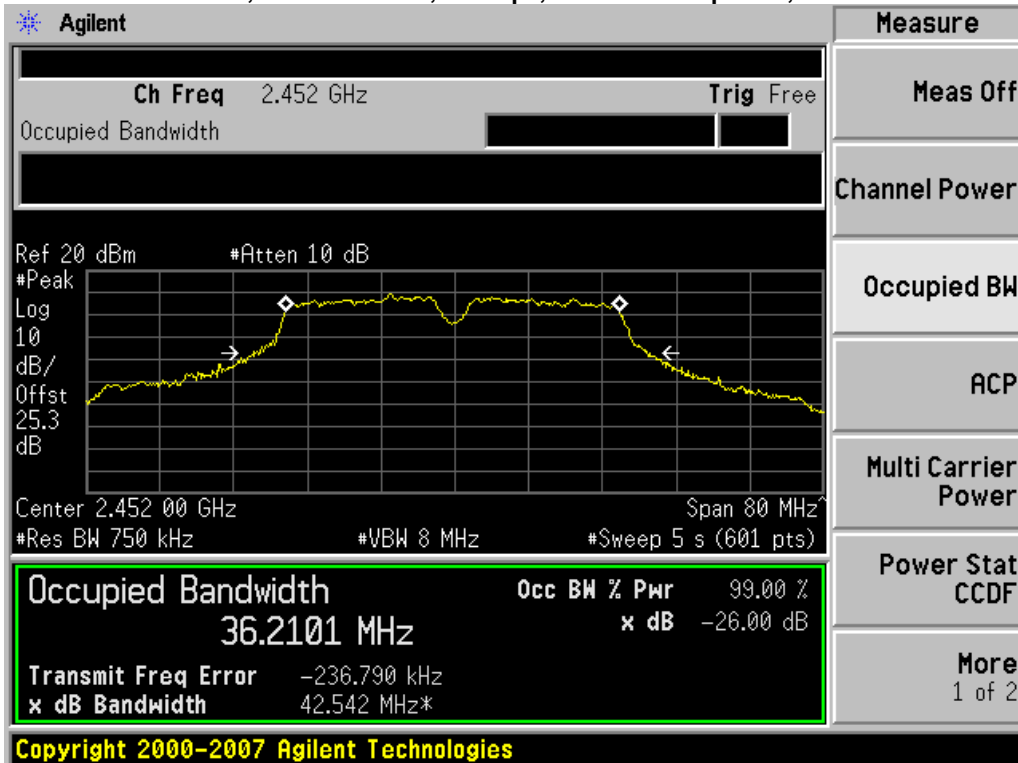




26dB/99% Bandwidth, 2442/2462 MHz, M7, HT-40, Single Transmit Paths

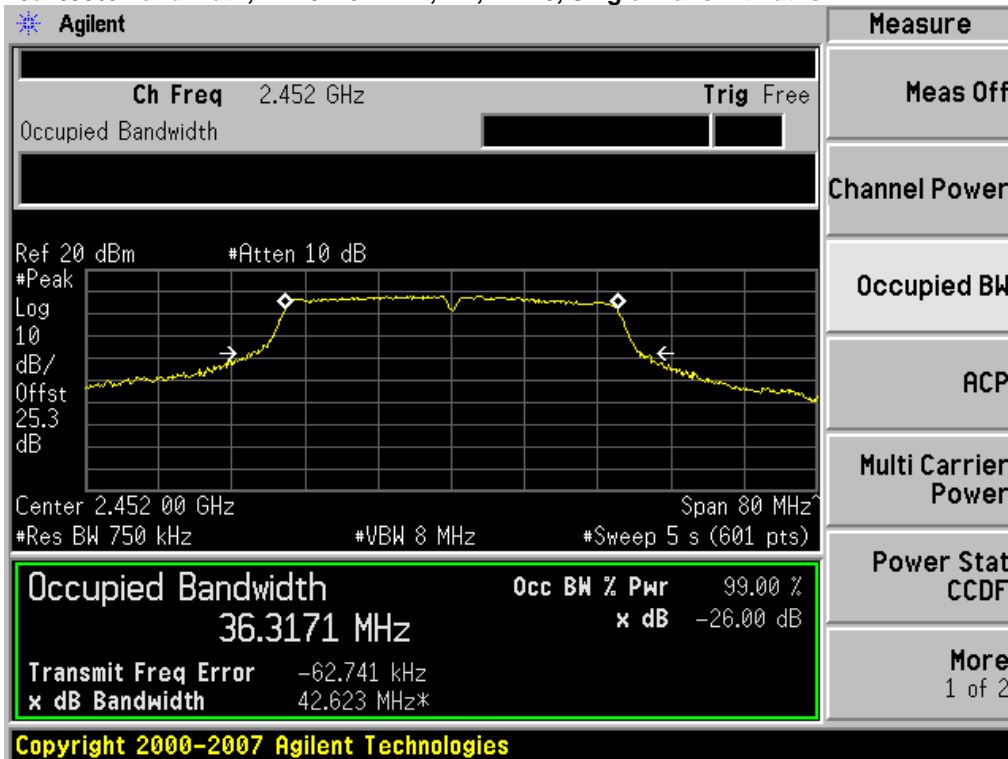

26dB/99% Bandwidth, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths

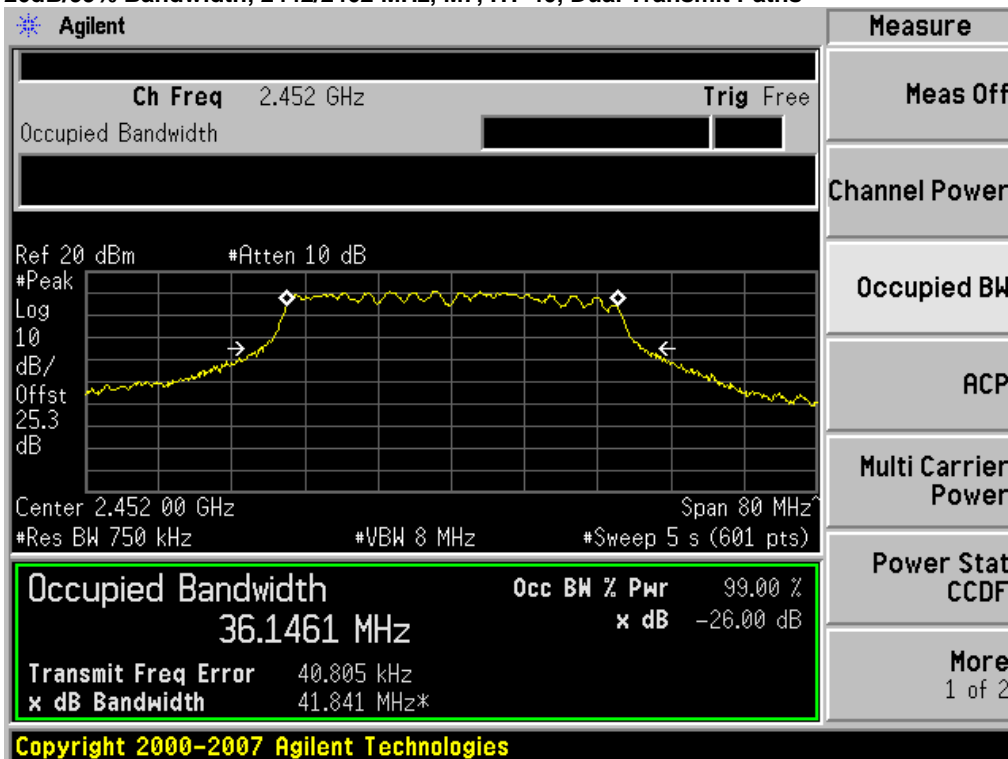





## Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gains are listed in the tables below. The tables also list the calculated Maximum Peak Power for each of the listed gains, as well as the associated Peak Power levels supported by this product. All of the supported power levels comply with the Maximum Peak Power levels.

Antenna Gain (dBi)	Required Power Reduction (dB)	Maximum Peak Power (dBm)	Supported Peak Power (dBm)
3	0	30	23
4	0	30	23
6	0	30	23
13.5	2.5	27.5	23

Beam Form Mode Antenna Gain (dBi)	Required Power Reduction (dB)	Maximum Peak Power (dBm)	Supported Peak Power (dBm)
6	0	30	20
7	1	29	20
9	3	27	20
16.5	3.5	26.5	20



Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.


- Enable "Channel Power" function of analyzer
- Center Frequency: Frequency from table below
- Span: 20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
- Ref Level Offset: Correct for attenuator and cable loss.
- Reference Level: 20 dBm
- Attenuation: 20 dB
- Sweep Time: 100ms, Single sweep
- Resolution Bandwidth: 1 MHz
- Video Bandwidth: 3 MHz
- Detector: Sample
- Trace: Trace Average 100 traces in Power Averaging Mode
- Integration BW: =26 dB BW from 26 dB Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.


Frequency (MHz)	Mode	Data Rate (Mbps)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	20.7	27.5	6.8
2412	Legacy CCK, Dual Tx Path	11	21.1	27.5	6.4
2412	Non HT-20, Single Tx Path	54	17.5	27.5	10.0
2412	Non HT-20, Dual Tx Path	54	19.3	27.5	8.2
2412	Non HT-20 Beam Forming	54	16.7	26.5	9.8
2437	Legacy CCK, Dual Tx Path	11	23.2	27.5	4.3
2437	Non HT-20 Beam Forming	54	20.1	26.5	6.4
2462	Legacy CCK, Single Tx Path	11	20.3	27.5	7.2
2462	Legacy CCK, Dual Tx Path	11	21.3	27.5	6.2
2462	Non HT-20, Single Tx Path	54	17.1	27.5	10.4
2462	Non HT-20, Dual Tx Path	54	17.6	27.5	9.9
2462	Non HT-20 Beam Forming	54	14.6	26.5	11.9
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	12.6	27.5	14.9
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	13.8	27.5	13.7
2412/2432	HT-40, Single Tx Path	M7	14.4	27.5	13.2
2412/2432	HT-40, Dual Tx Path	M7	15.3	27.5	12.2
2427/2447	Non HT-40 Duplicate	54	20.9	27.5	6.6
2427/2447	HT-40	M7	20.3	27.5	7.2
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	12.2	27.5	15.3
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	13.7	27.5	13.8
2442/2462	HT-40, Single Tx Path	M7	14.0	27.5	13.5
2442/2462	HT-40, Dual Tx Path	M7	15.5	27.5	12.0



Peak Power, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

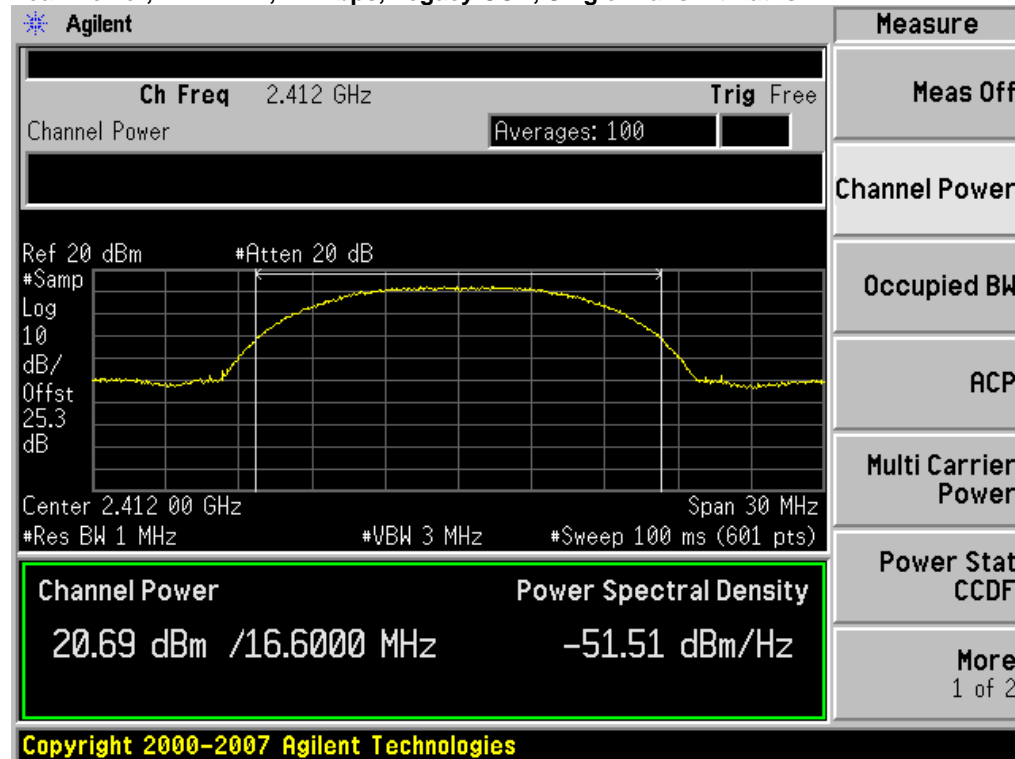


Peak Power, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

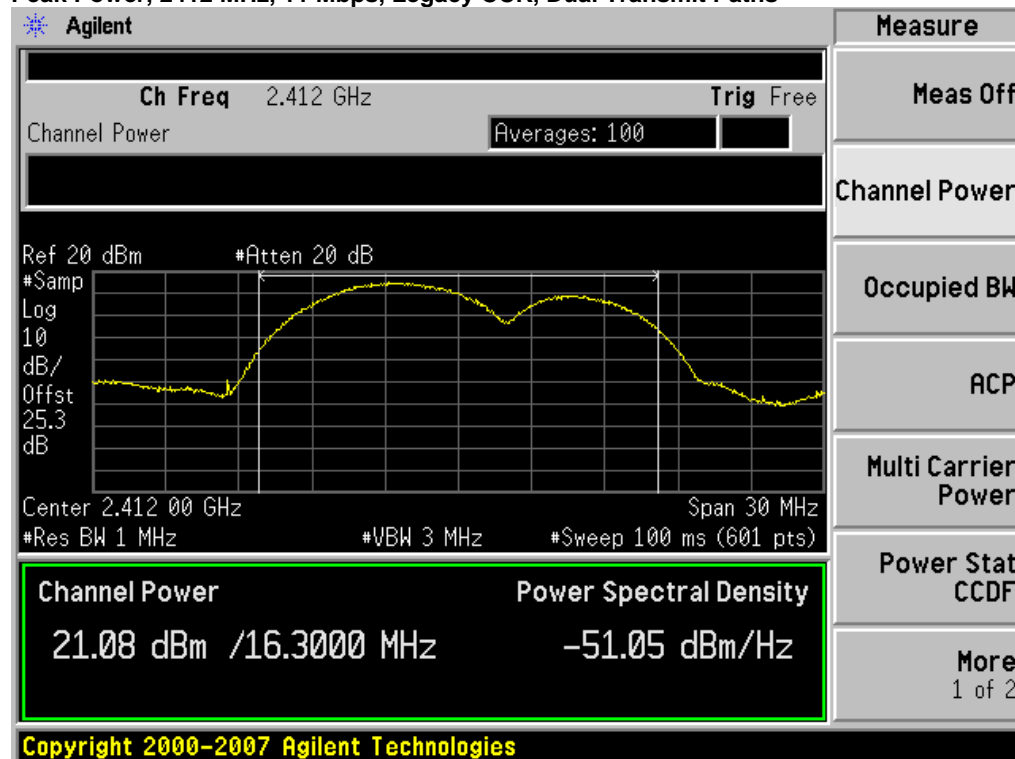




Peak Power, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths

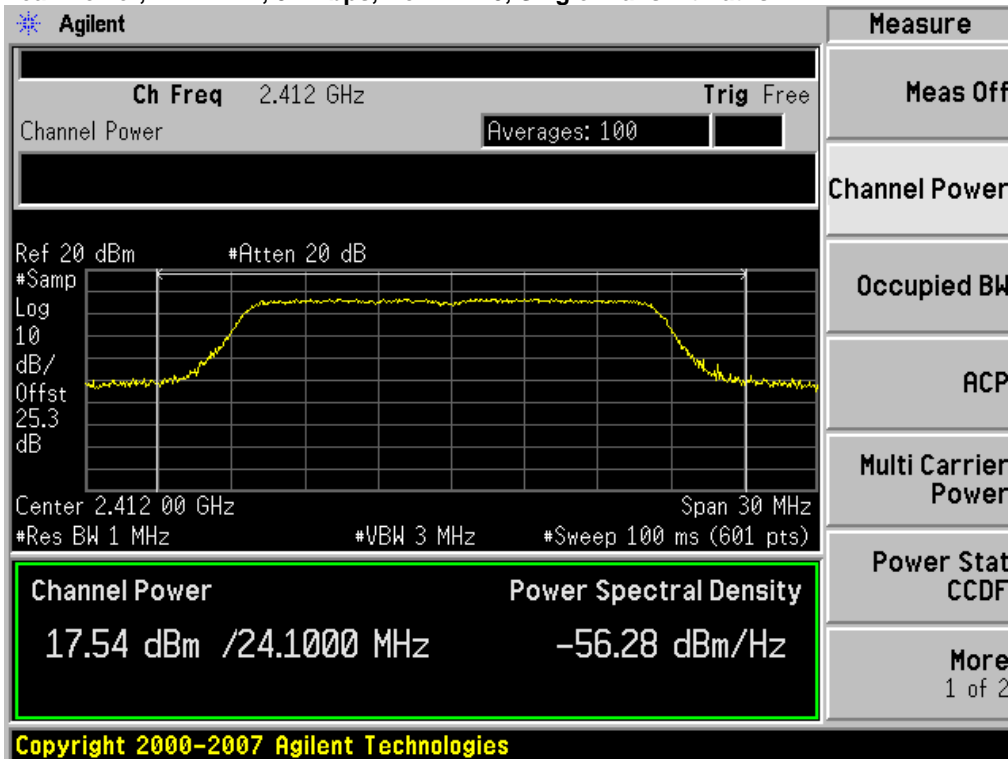


Peak Power, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths

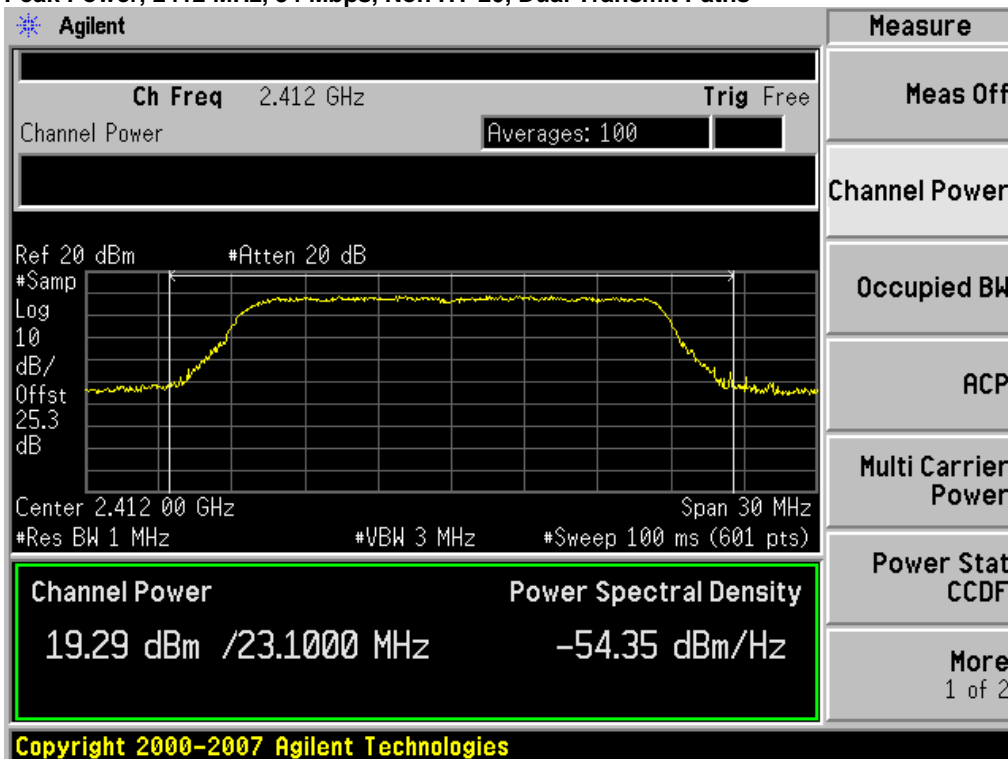




**Peak Power, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

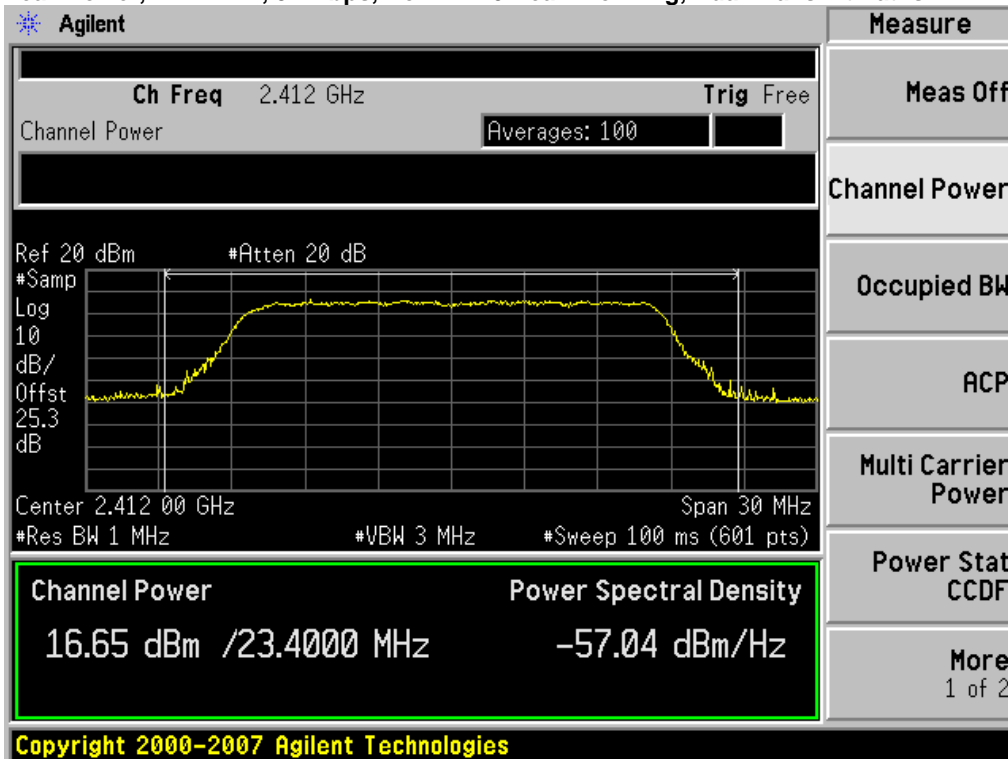


**Peak Power, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**

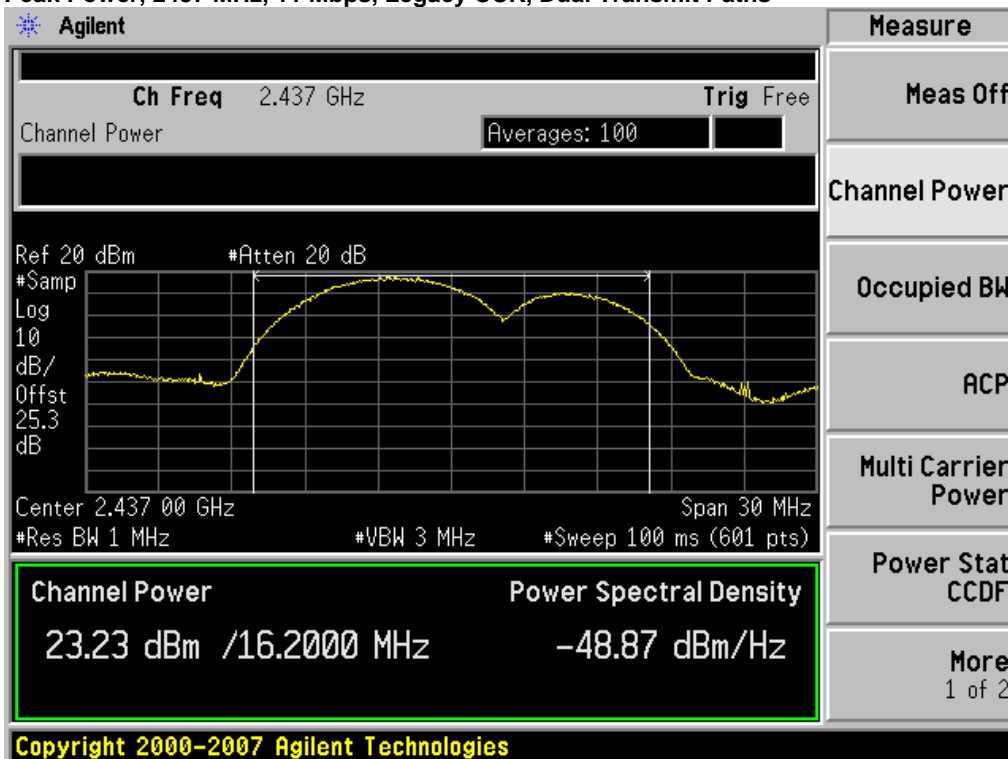




**Peak Power, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

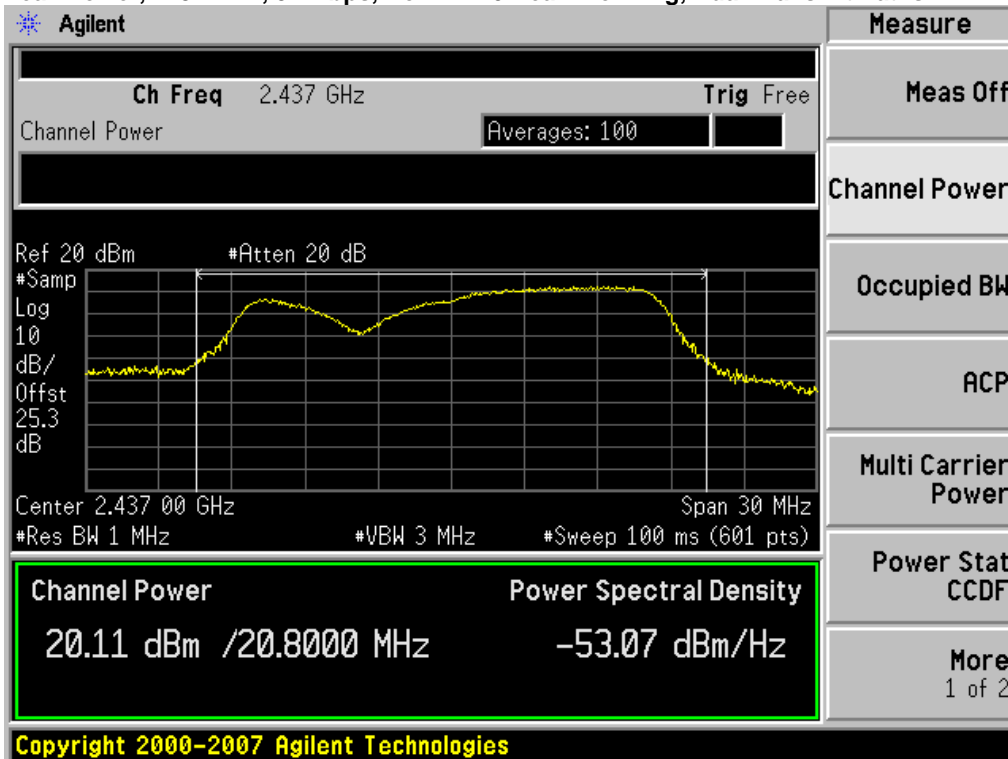

**Peak Power, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths**

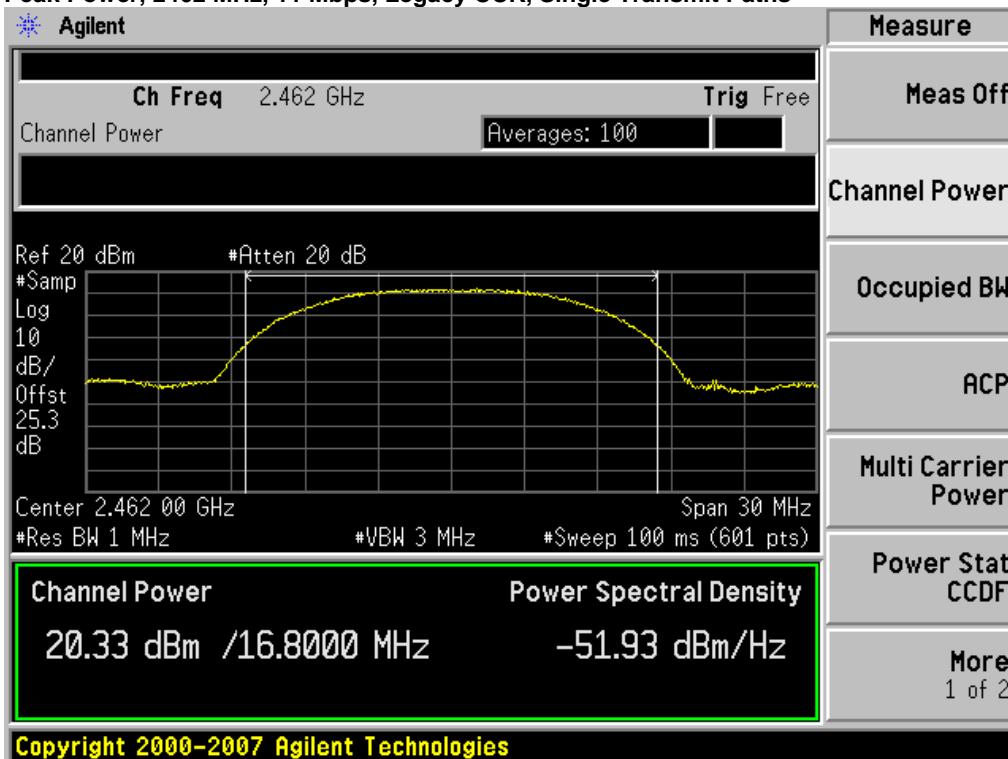



Peak Power, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths


<p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power Averages: 100</p>		<p>Measure</p> <p>Meas Off</p>
		<p>Channel Power</p> <p>Occupied BW</p> <p>ACP</p> <p>Multi Carrier Power</p> <p>Power Stat CCDF</p> <p>More 1 of 2</p>
<p>Channel Power 21.34 dBm /16.1000 MHz</p> <p>Power Spectral Density -50.73 dBm/Hz</p>		
<p>Copyright 2000-2007 Agilent Technologies</p>		

Peak Power, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths


<p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power Averages: 100</p>		<p>Measure</p> <p>Meas Off</p>
		<p>Channel Power</p> <p>Occupied BW</p> <p>ACP</p> <p>Multi Carrier Power</p> <p>Power Stat CCDF</p> <p>More 1 of 2</p>
<p>Channel Power 17.09 dBm /23.5000 MHz</p> <p>Power Spectral Density -56.62 dBm/Hz</p>		
<p>Copyright 2000-2007 Agilent Technologies</p>		



Peak Power, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths

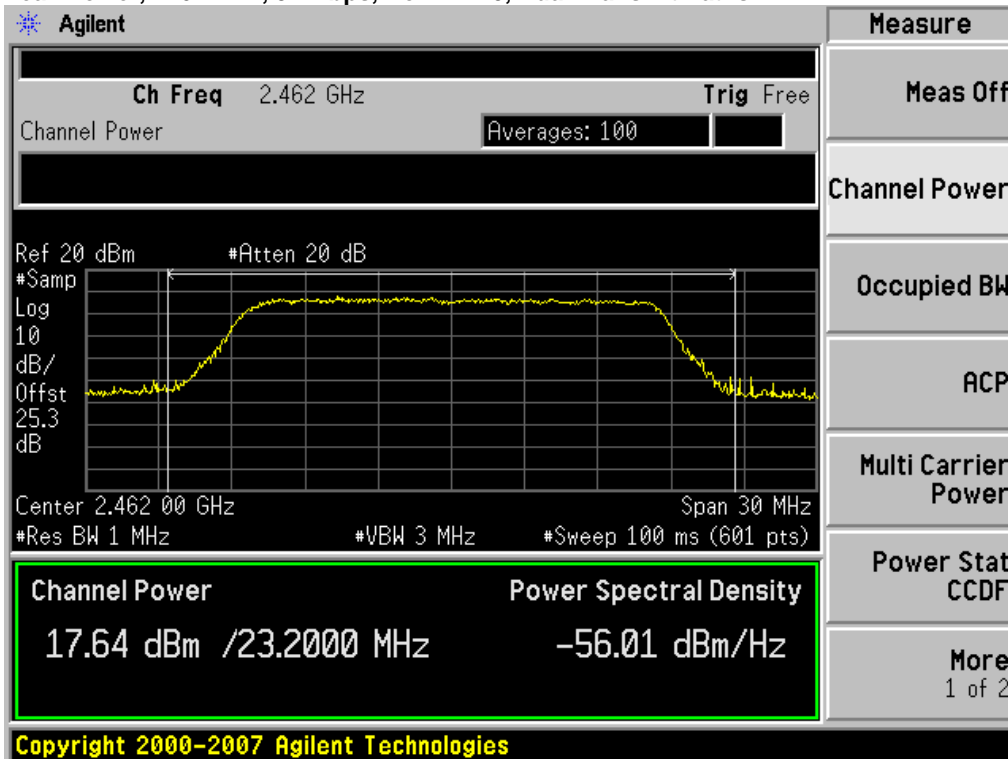


Peak Power, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

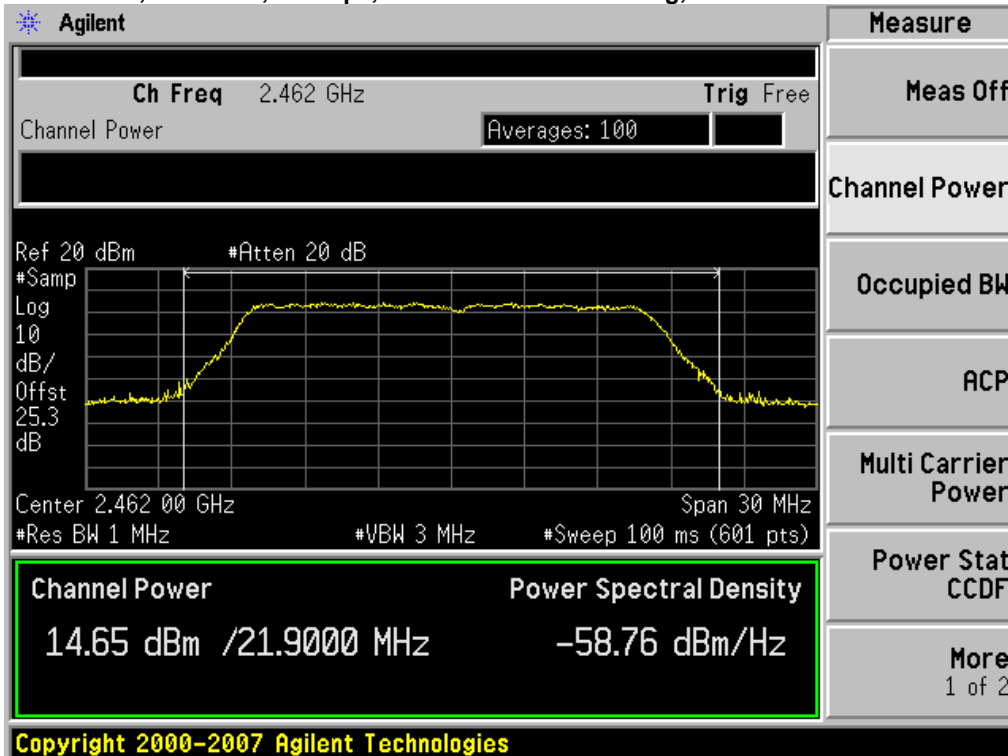






Peak Power, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths

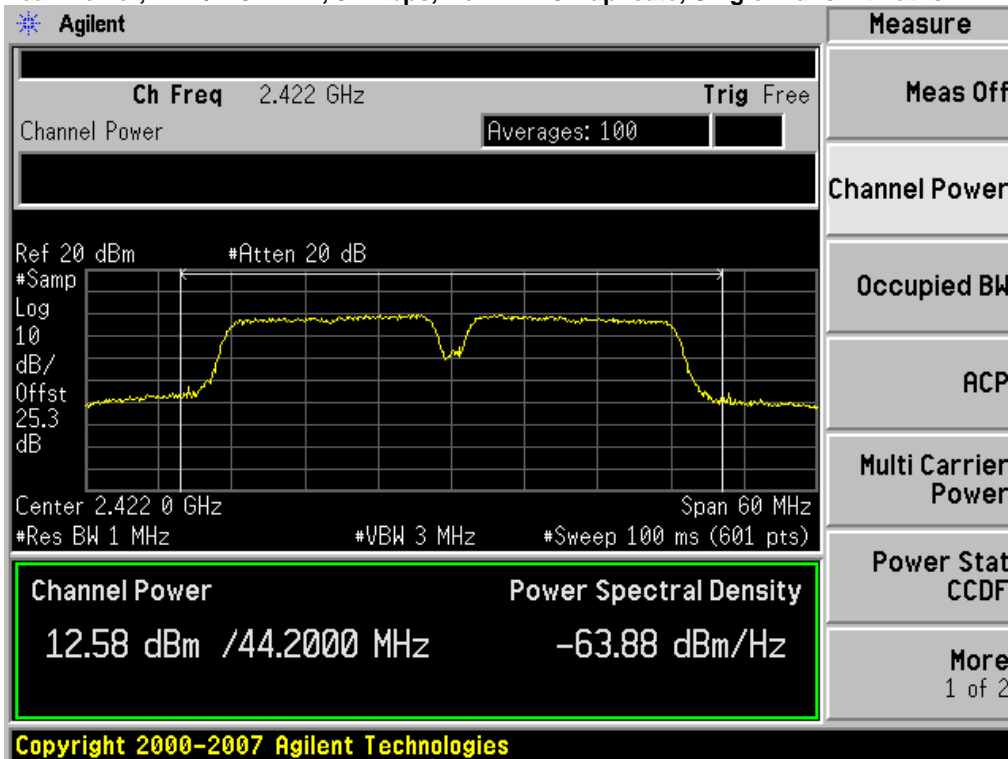

Peak Power, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

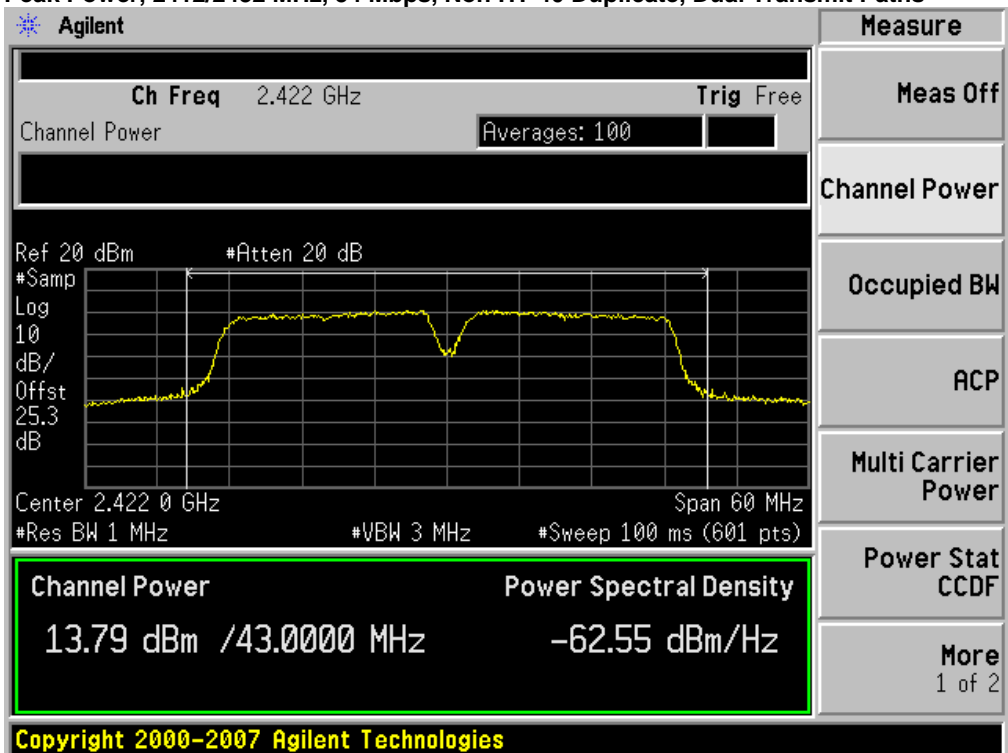



Peak Power, 2412/2432 MHz, M7, HT-40, Single Transmit Paths


<p>Agilent</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power Averages: 100</p>		Measure
		Meas Off
<p>Channel Power</p>		Channel Power
<p>Occupied BW</p>		Occupied BW
<p>ACP</p>		ACP
<p>Multi Carrier Power</p>		Multi Carrier Power
<p>Power Stat CCDF</p>		Power Stat CCDF
<p>Channel Power 14.35 dBm / 42.4000 MHz</p> <p>Power Spectral Density -61.92 dBm/Hz</p>		More 1 of 2
<p>Copyright 2000-2007 Agilent Technologies</p>		

Peak Power, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths


<p>Agilent</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power Averages: 100</p>		Measure
		Meas Off
<p>Channel Power</p>		Channel Power
<p>Occupied BW</p>		Occupied BW
<p>ACP</p>		ACP
<p>Multi Carrier Power</p>		Multi Carrier Power
<p>Power Stat CCDF</p>		Power Stat CCDF
<p>Channel Power 15.32 dBm / 42.7000 MHz</p> <p>Power Spectral Density -60.99 dBm/Hz</p>		More 1 of 2
<p>Copyright 2000-2007 Agilent Technologies</p>		



Peak Power, 2427/2447 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

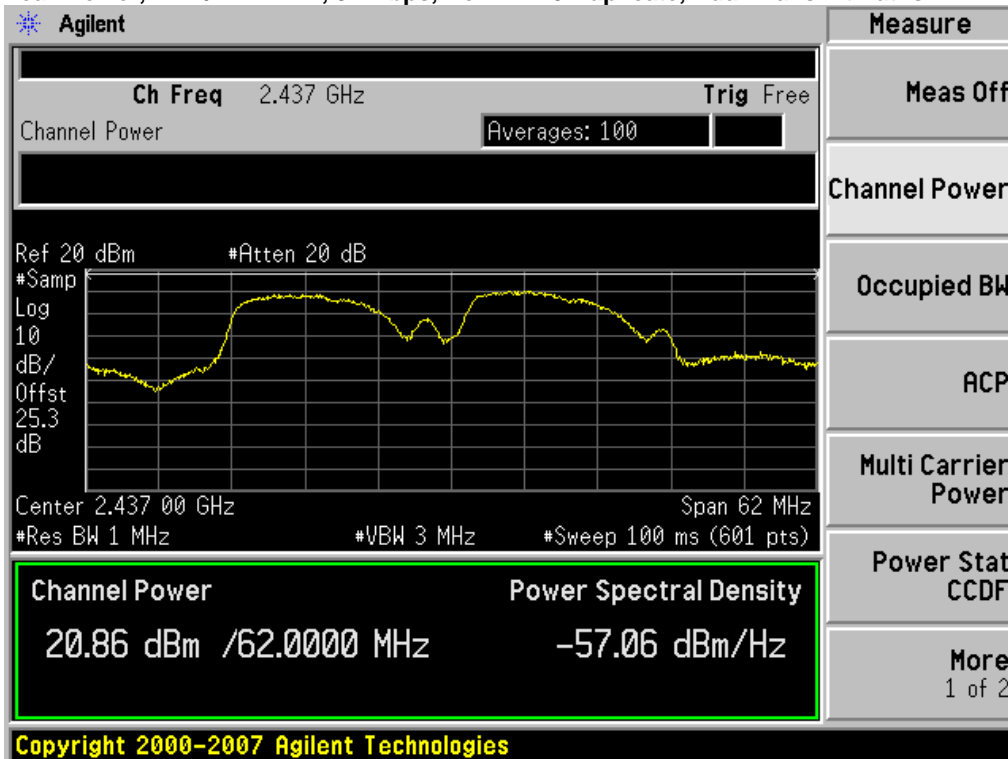


Peak Power, 2427/2447 MHz, M7, HT-40, Dual Transmit Paths

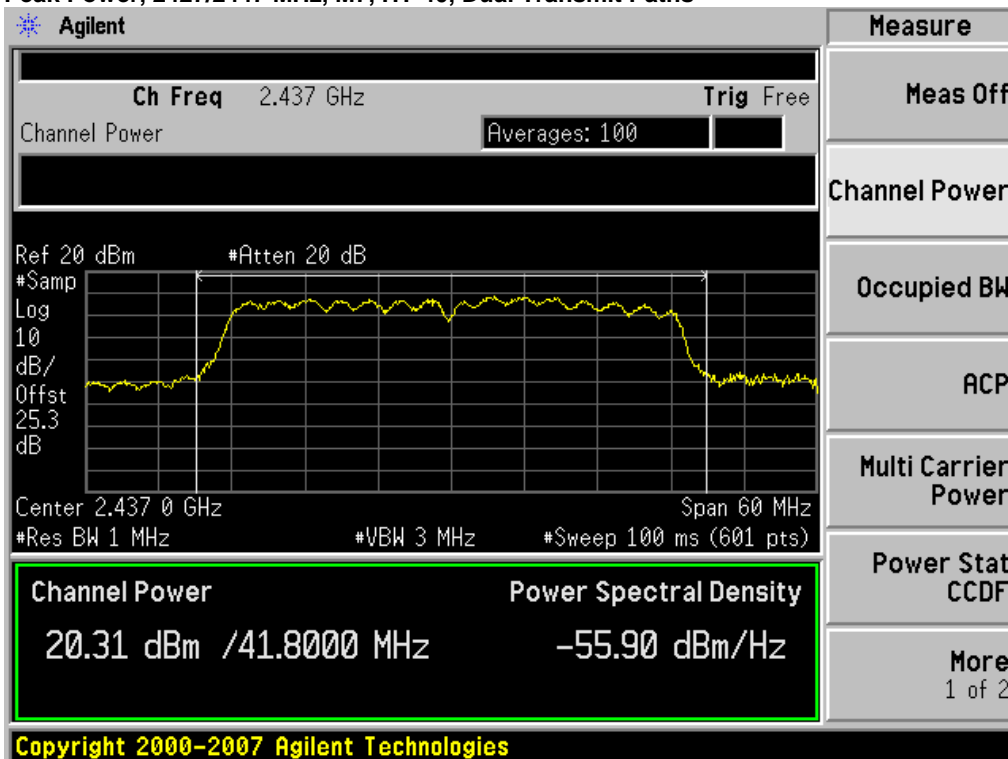




Peak Power, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths

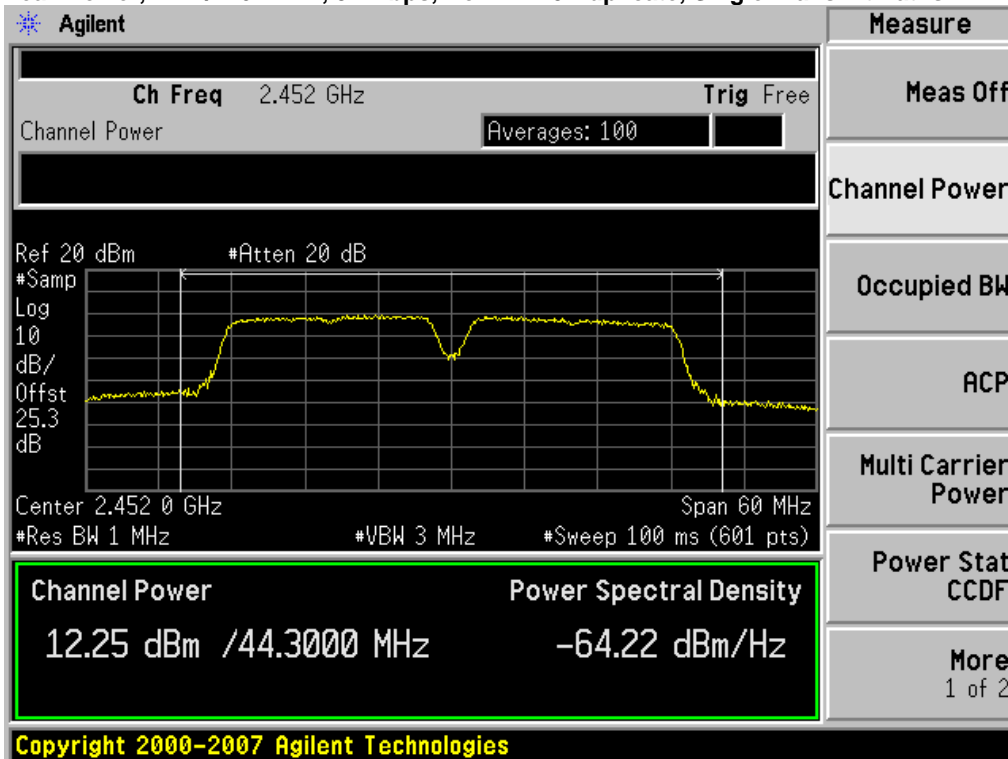


Peak Power, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

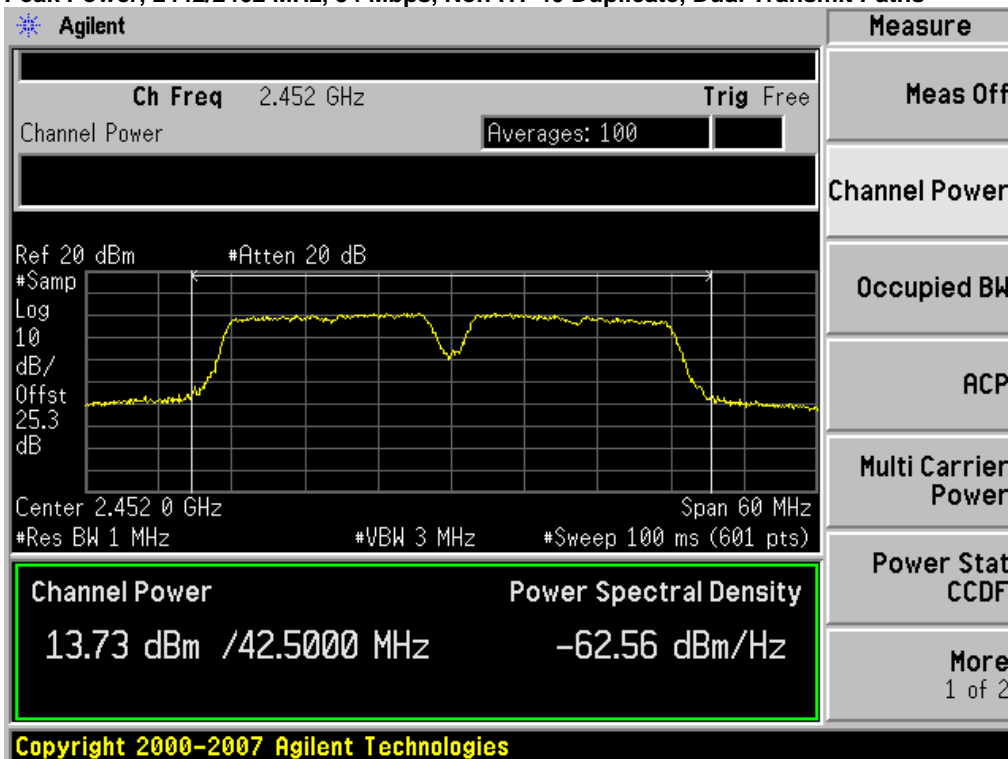




Peak Power, 2442/2462 MHz, M7, HT-40, Single Transmit Paths

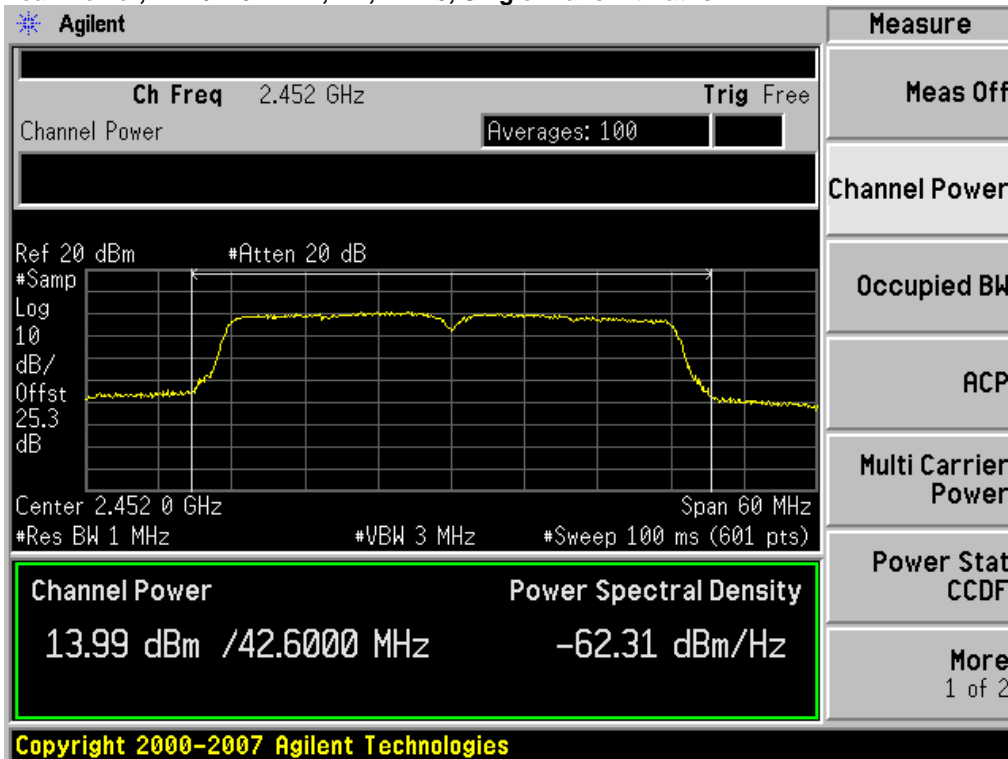

Peak Power, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths

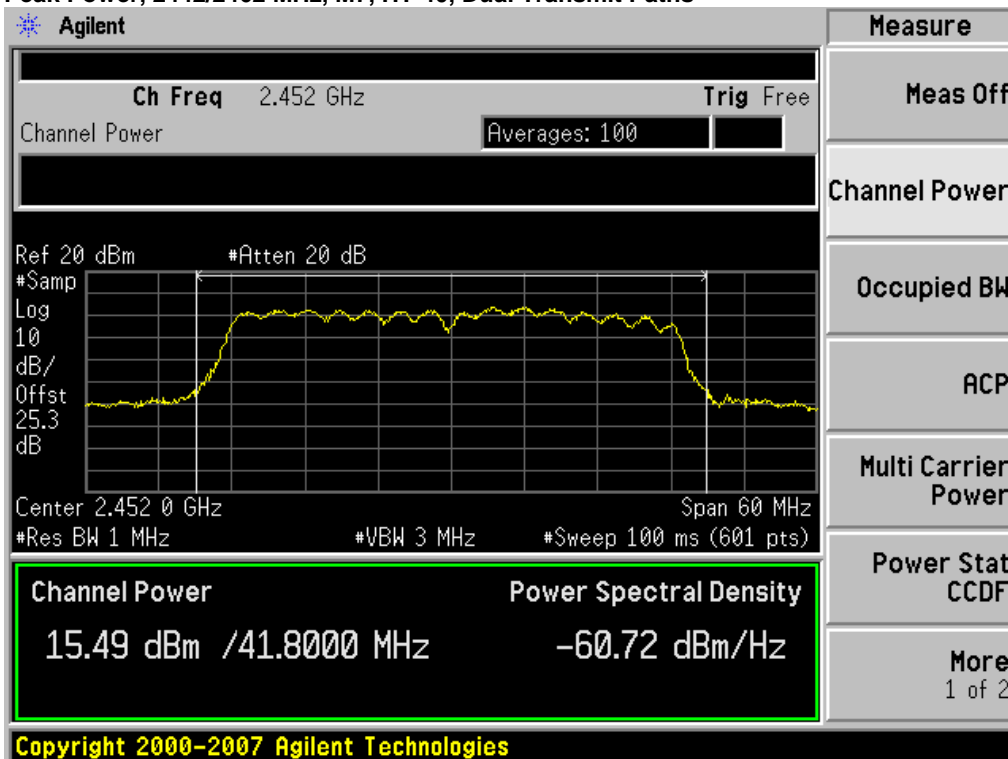



## Power Spectral Density

15.247: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.


Center Frequency: Frequency from table below  
 Span: 20 MHz  
 Ref Level Offset: Correct for attenuator and cable loss.  
 Reference Level: 20 dBm  
 Attenuation: 20 dB  
 Sweep Time: 10s  
 Resolution Bandwidth: 3 kHz  
 Video Bandwidth: 10 kHz  
 Detector: Peak  
 Trace: Single  
 Marker: Peak Search

Record the Marker value.


Frequency (MHz)	Mode	Data Rate (Mbps)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	-2.6	8	10.6
2412	Legacy CCK, Dual Tx Path	11	6.2	8	1.8
2412	Non HT-20, Single Tx Path	54	-7.6	8	15.6
2412	Non HT-20, Dual Tx Path	54	-5.0	8	13.0
2412	Non HT-20 Beam Forming	54	-7.8	8	15.8
2437	Legacy CCK, Dual Tx Path	11	1.2	8	6.8
2437	Non HT-20 Beam Forming	54	-3.5	8	11.5
2462	Legacy CCK, Single Tx Path	11	-2.0	8	10.0
2462	Legacy CCK, Dual Tx Path	11	7.9	8	0.1
2462	Non HT-20, Single Tx Path	54	-8.6	8	16.6
2462	Non HT-20, Dual Tx Path	54	-6.7	8	14.7
2462	Non HT-20 Beam Forming	54	-8.8	8	16.8
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	-15.1	8	23.1
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	-13.0	8	21.0
2412/2432	HT-40, Single Tx Path	M7	-10.9	8	18.9
2412/2432	HT-40, Dual Tx Path	M7	-8.6	8	16.6
2427/2447	Non HT-40 Duplicate	54	-5.7	8	13.7
2427/2447	HT-40	M7	-4.4	8	12.4
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	-15.8	8	23.8
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	-12.8	8	20.8
2442/2462	HT-40, Single Tx Path	M7	-12.0	8	20.0
2442/2462	HT-40, Dual Tx Path	M7	-9.7	8	17.7



**Power Spectral Density, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths**

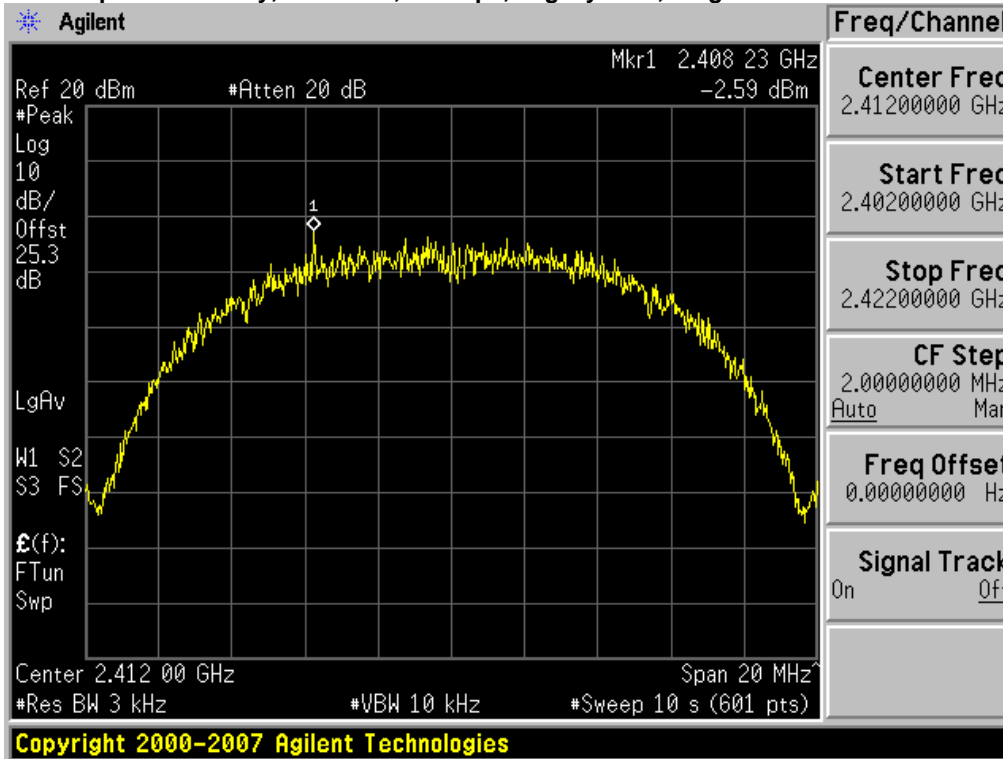


**Power Spectral Density, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**

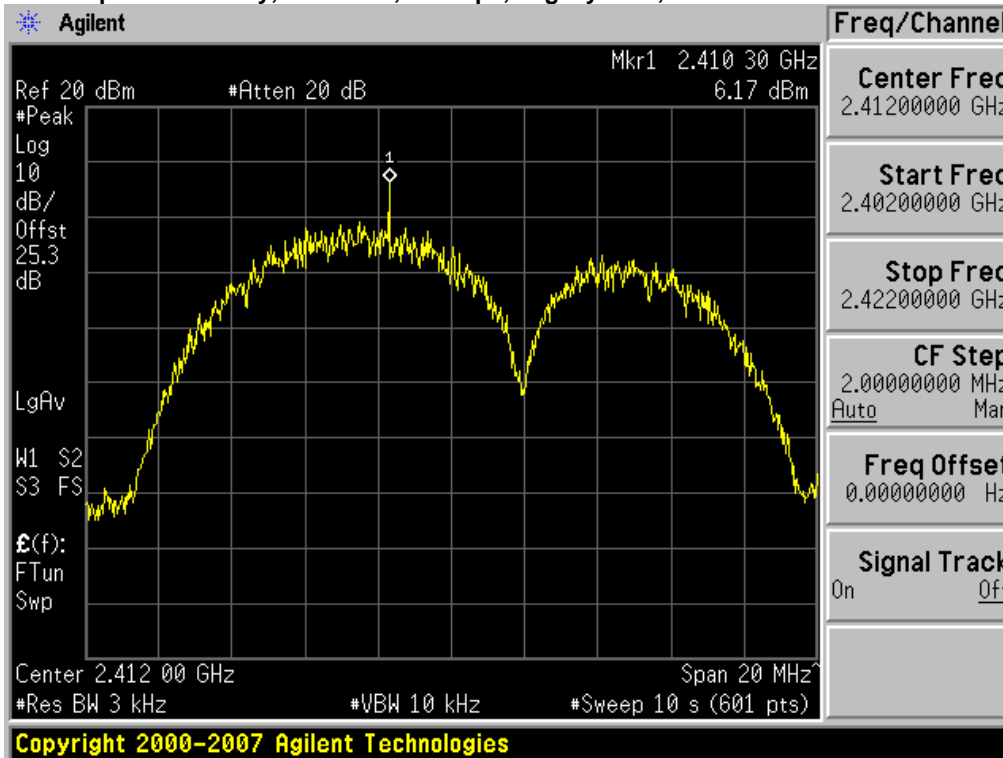




**Power Spectral Density, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths**

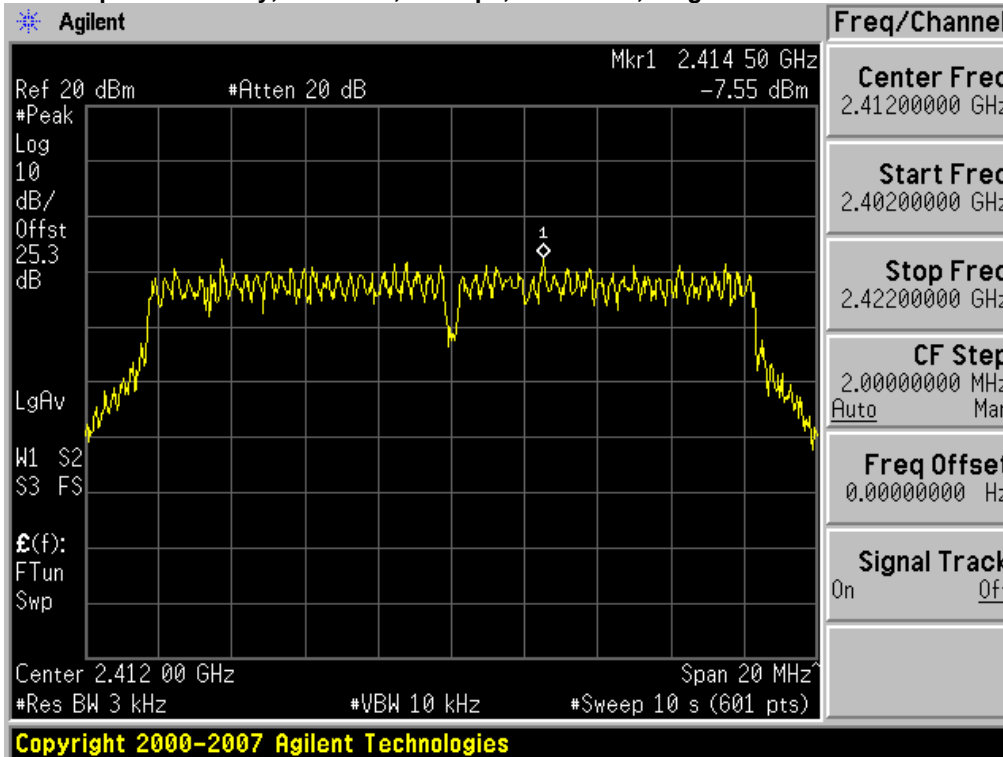


**Power Spectral Density, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths**

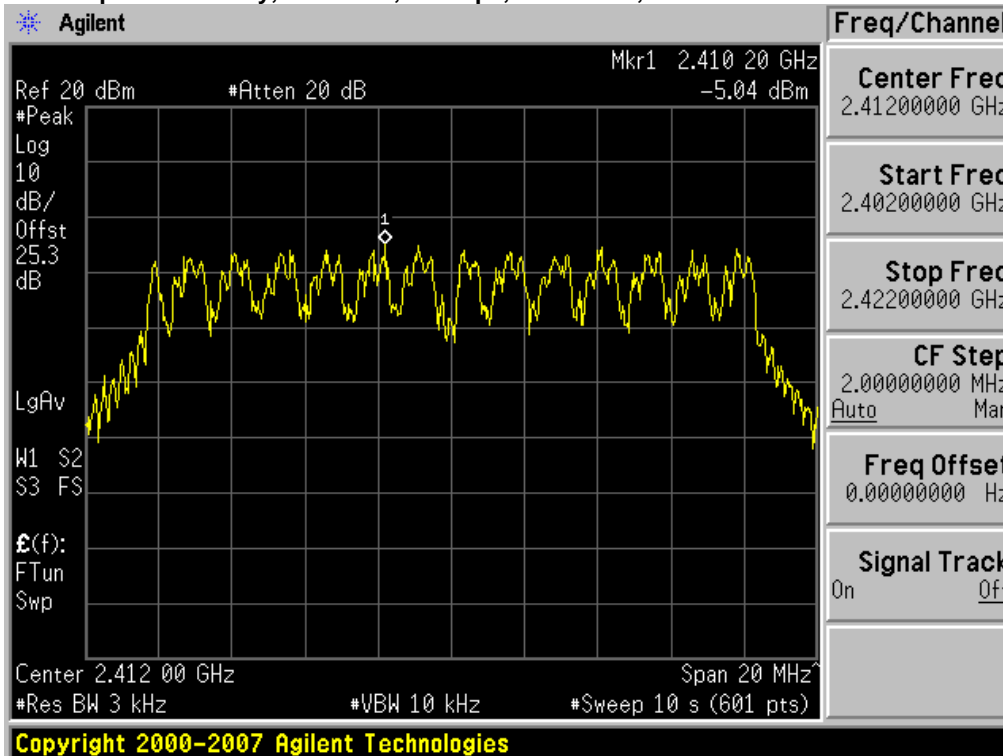






**Power Spectral Density, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

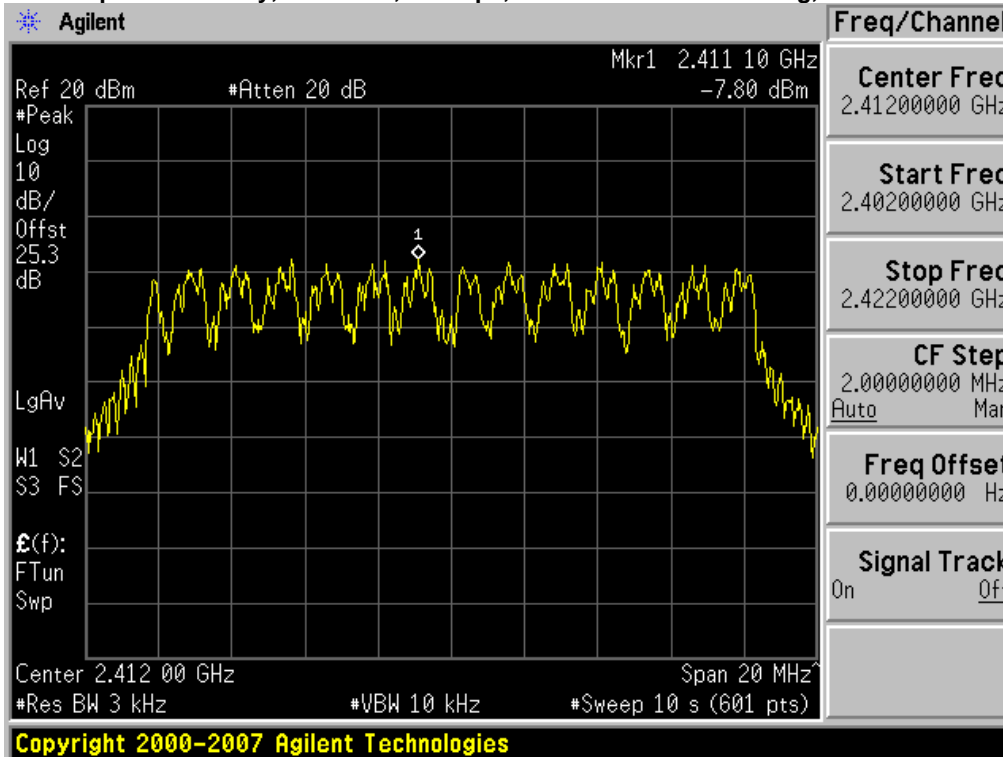


**Power Spectral Density, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**

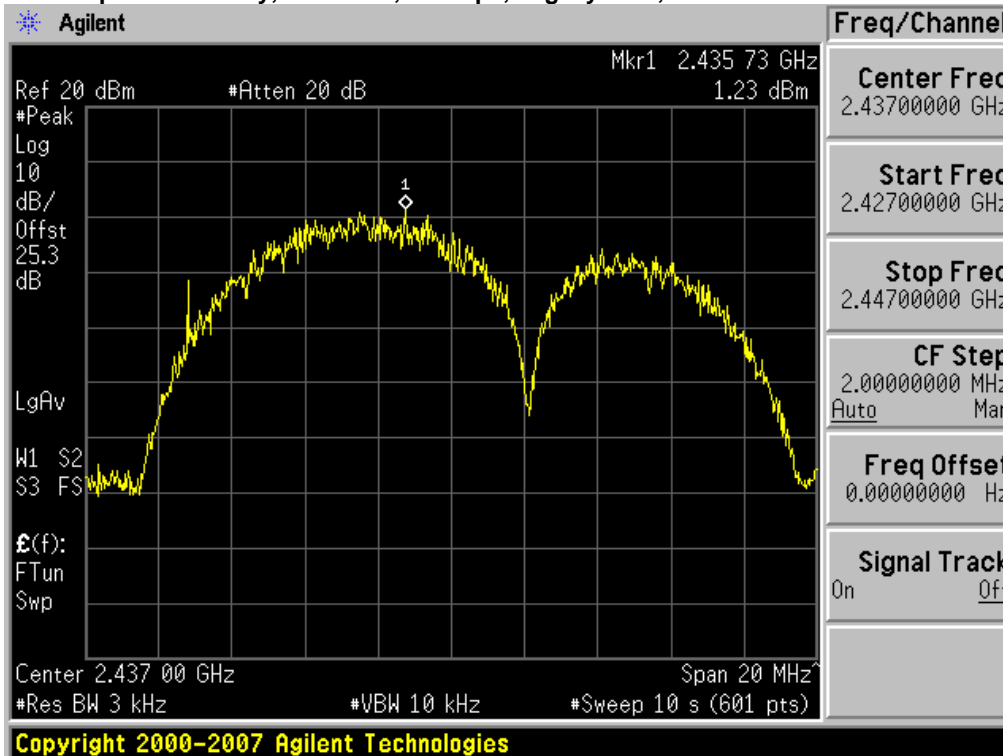




**Power Spectral Density, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

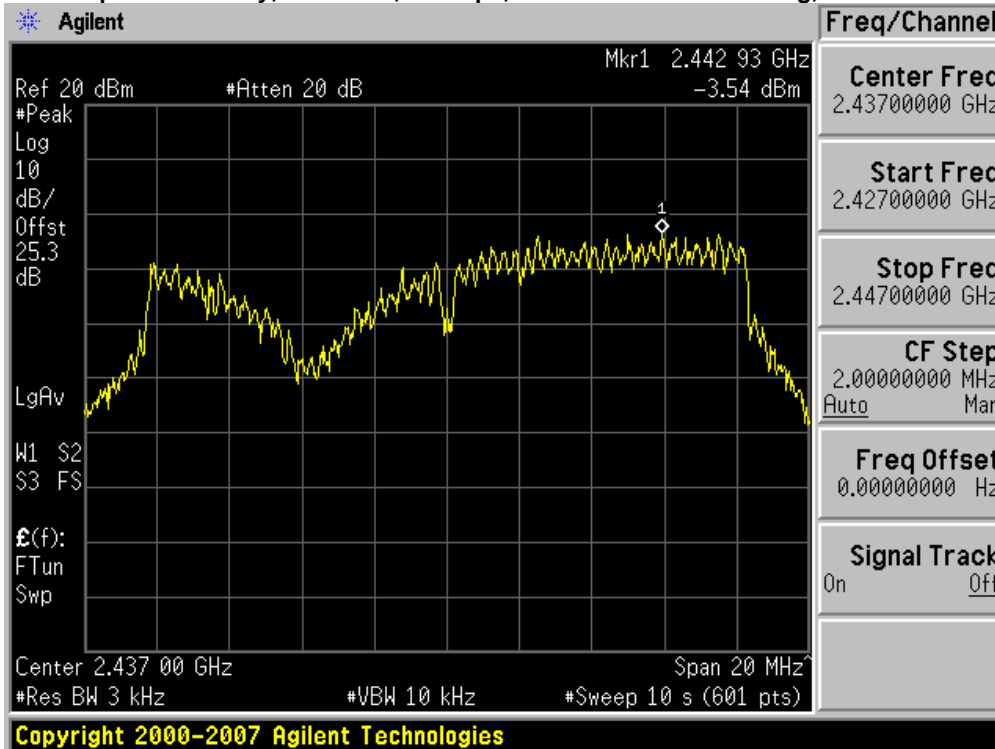


**Power Spectral Density, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths**

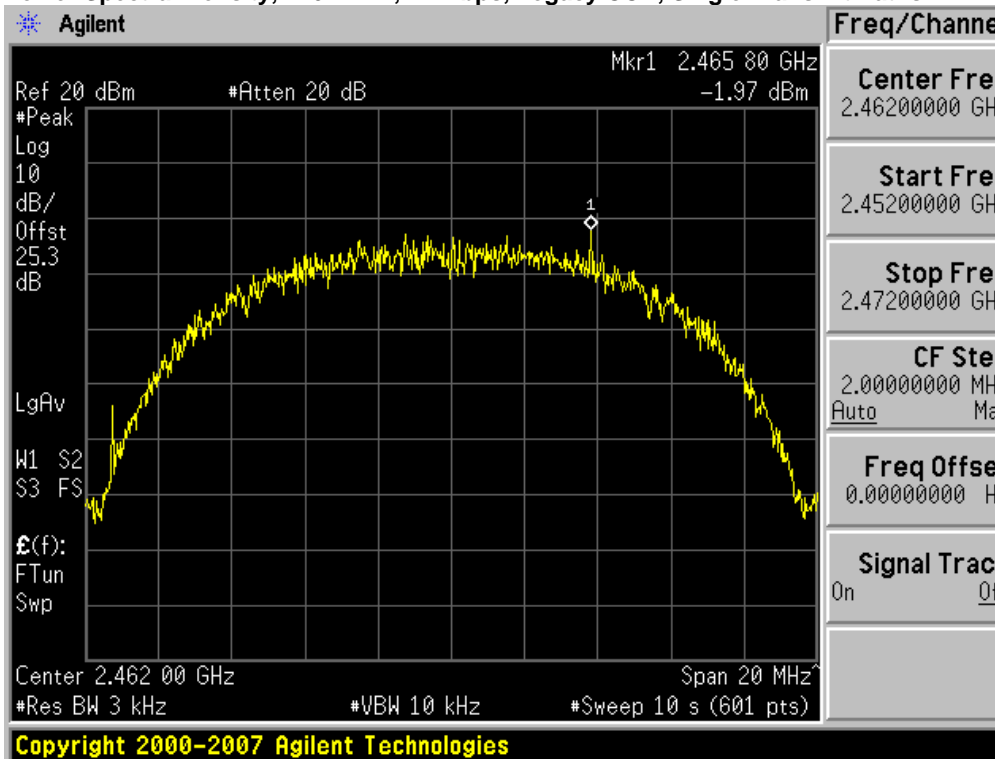




**Power Spectral Density, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**

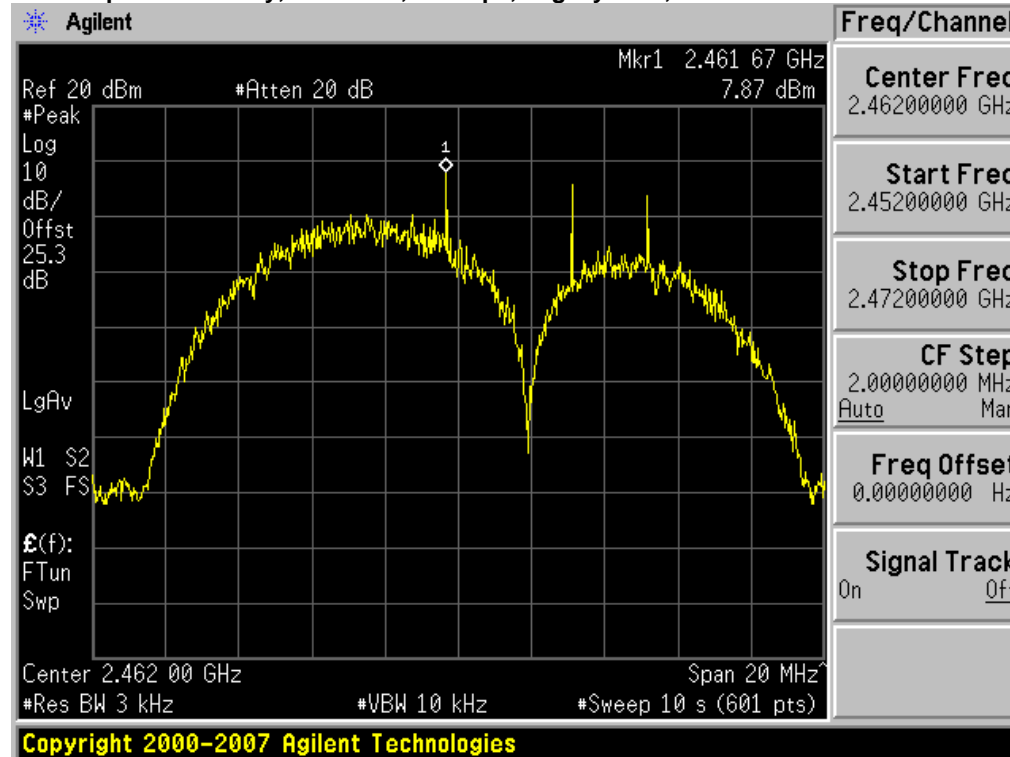


**Power Spectral Density, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths**

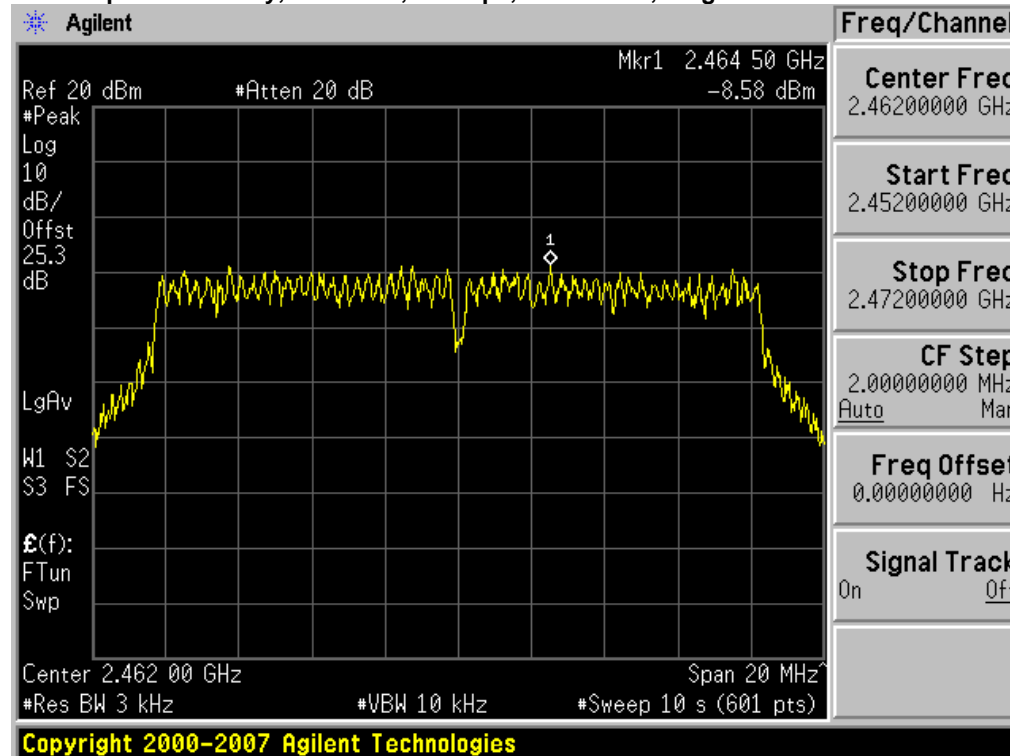




**Power Spectral Density, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths**

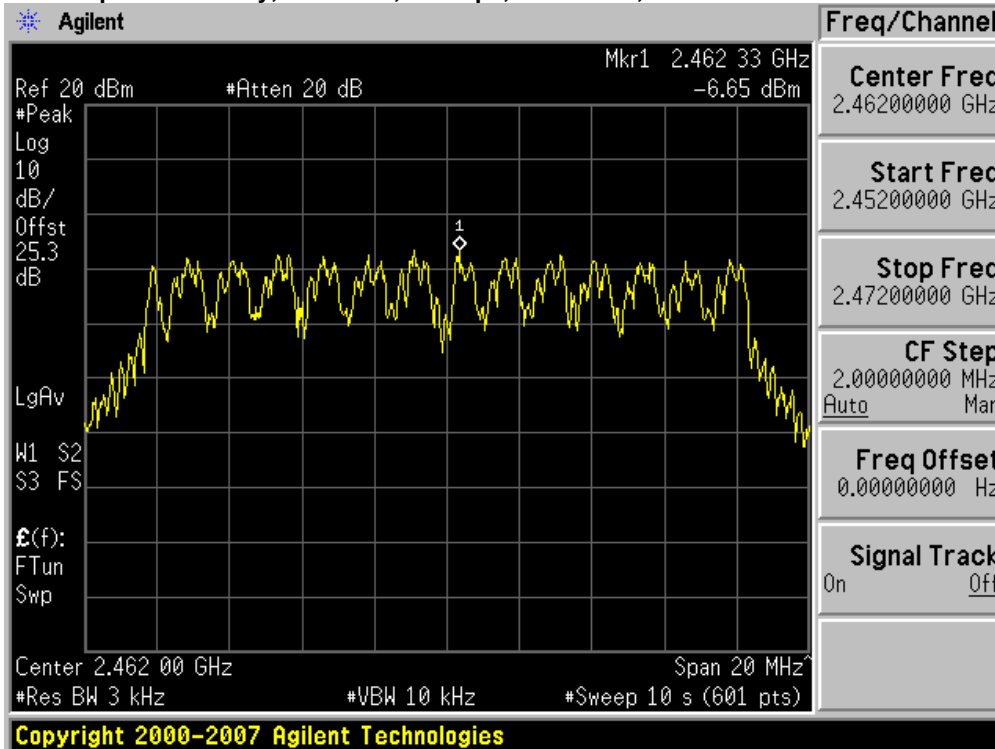


**Power Spectral Density, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

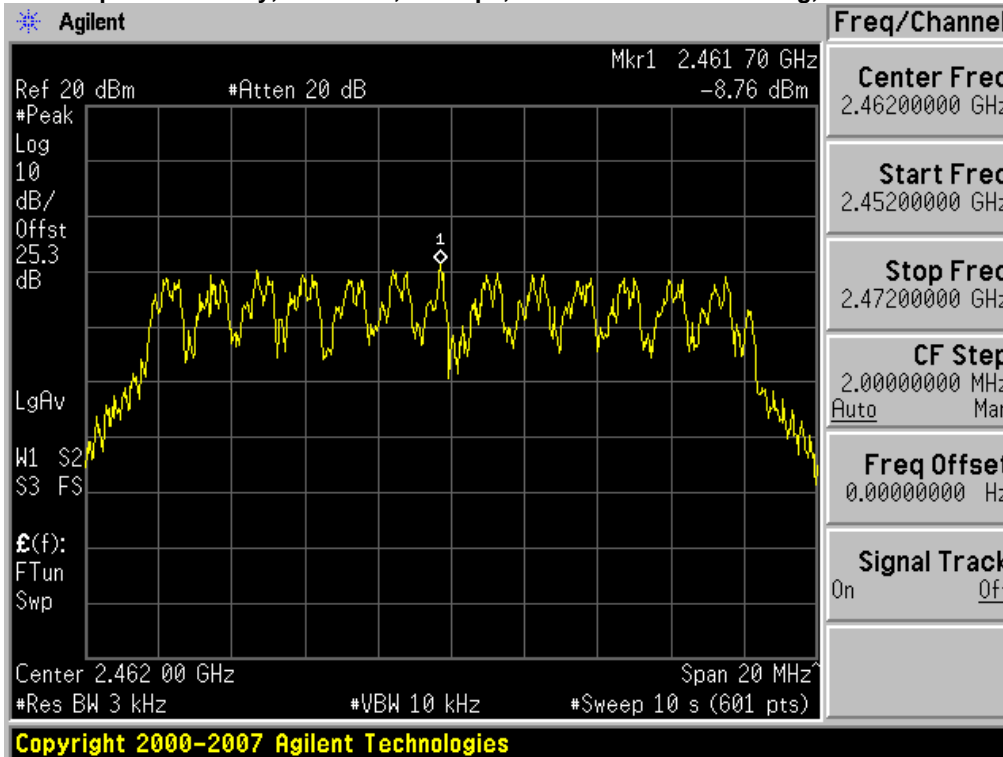




**Power Spectral Density, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths**

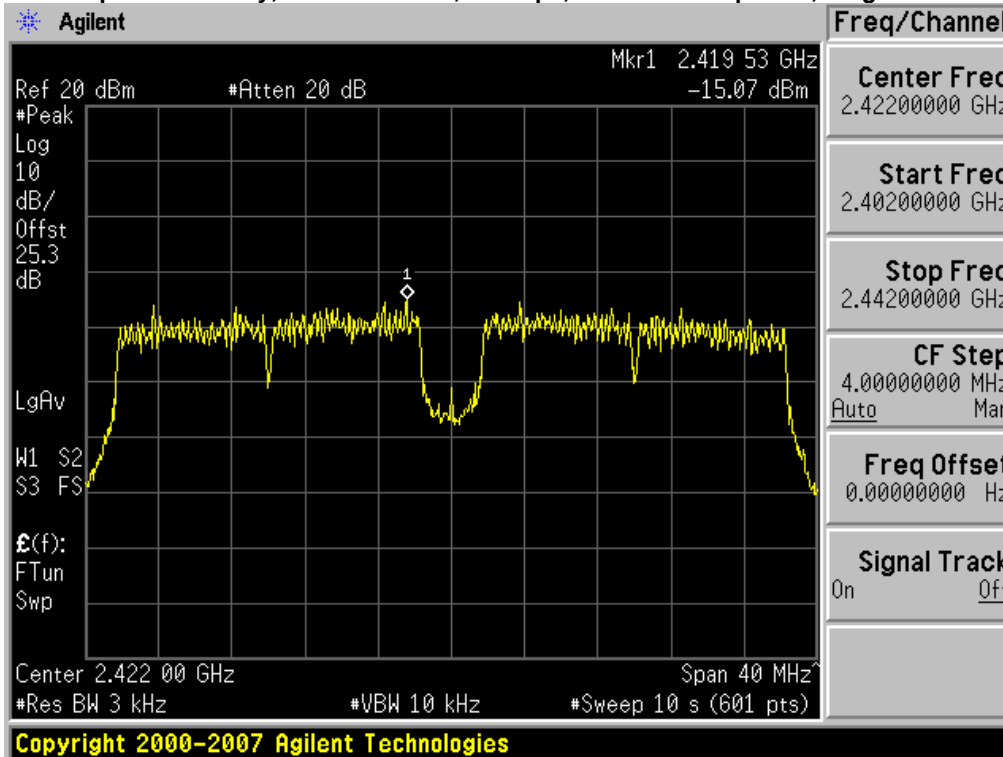


**Power Spectral Density, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths**

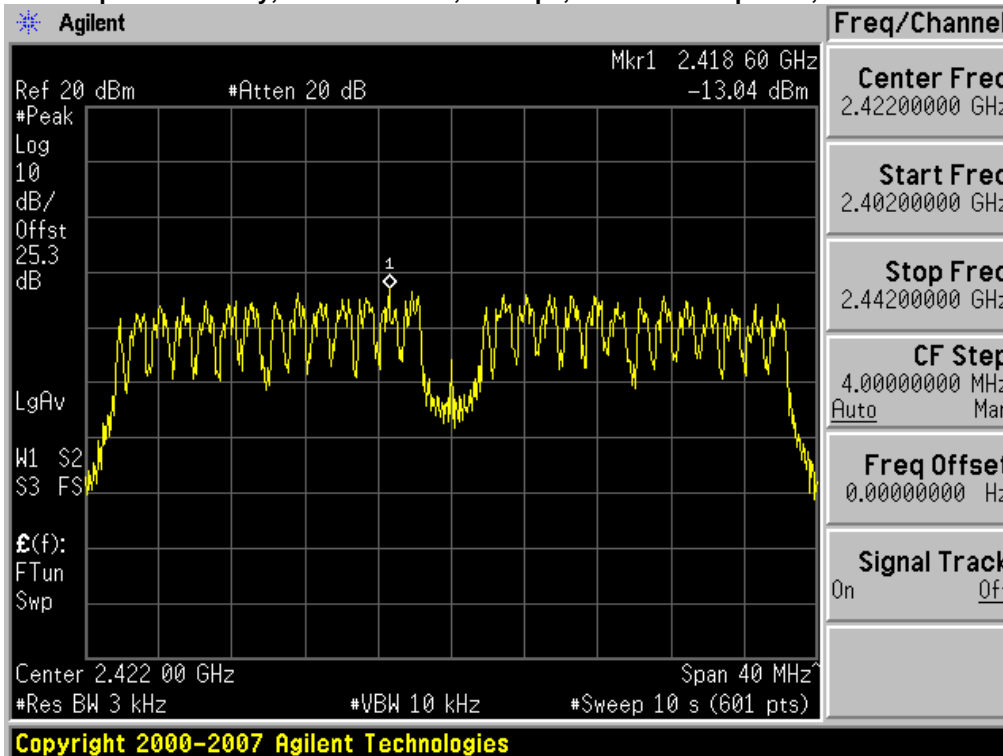




Power Spectral Density, 2412/2432 MHz, M7, HT-40, Single Transmit Paths

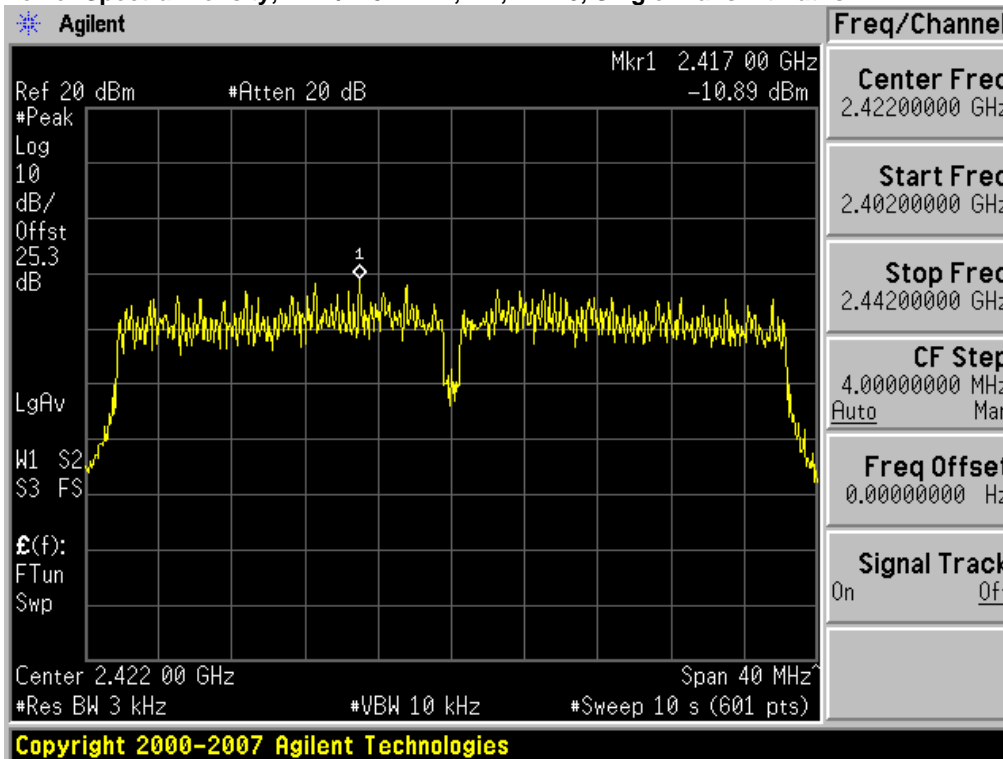


Power Spectral Density, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths

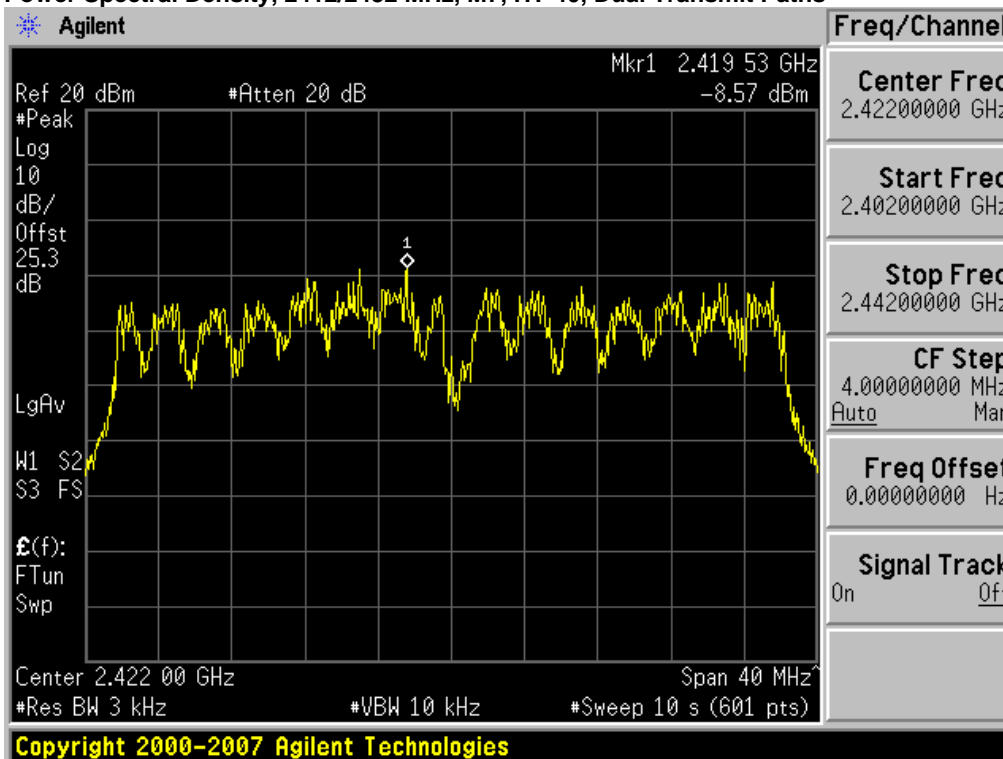




**Power Spectral Density, 2427/2447 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths**

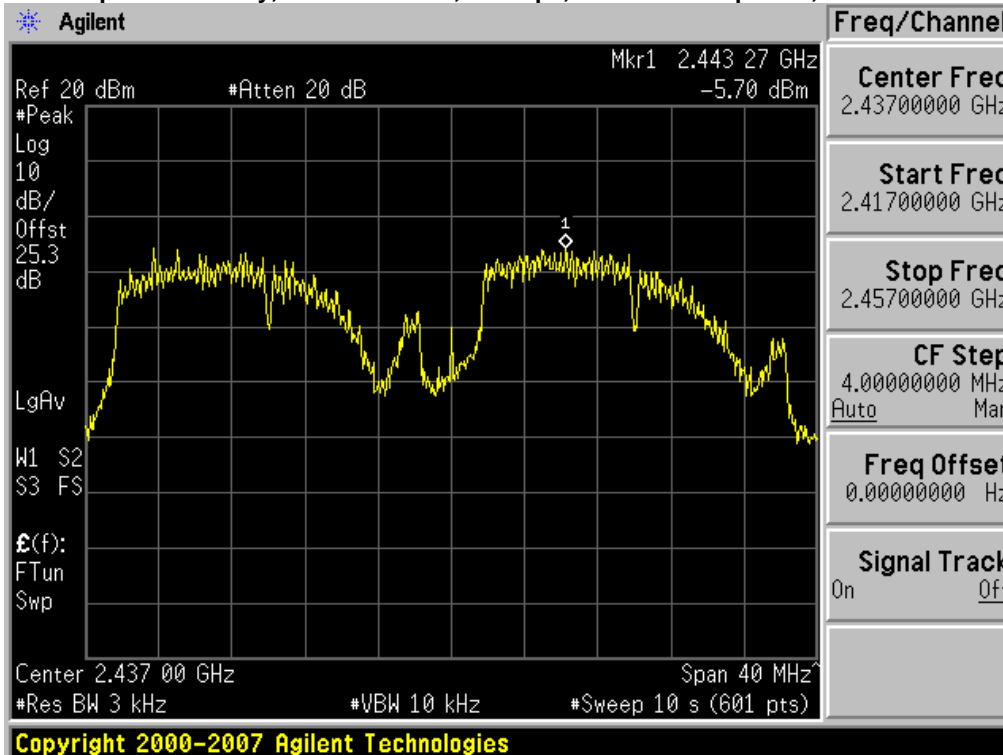


**Power Spectral Density, 2427/2447 MHz, M7, HT-40, Dual Transmit Paths**

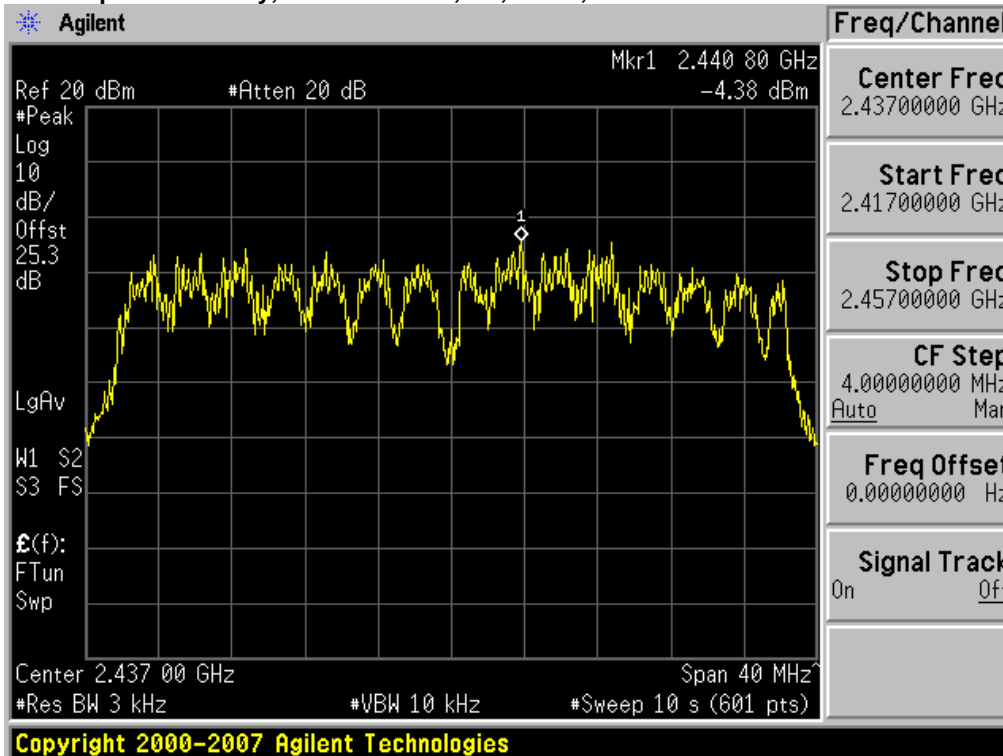




Power Spectral Density, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths

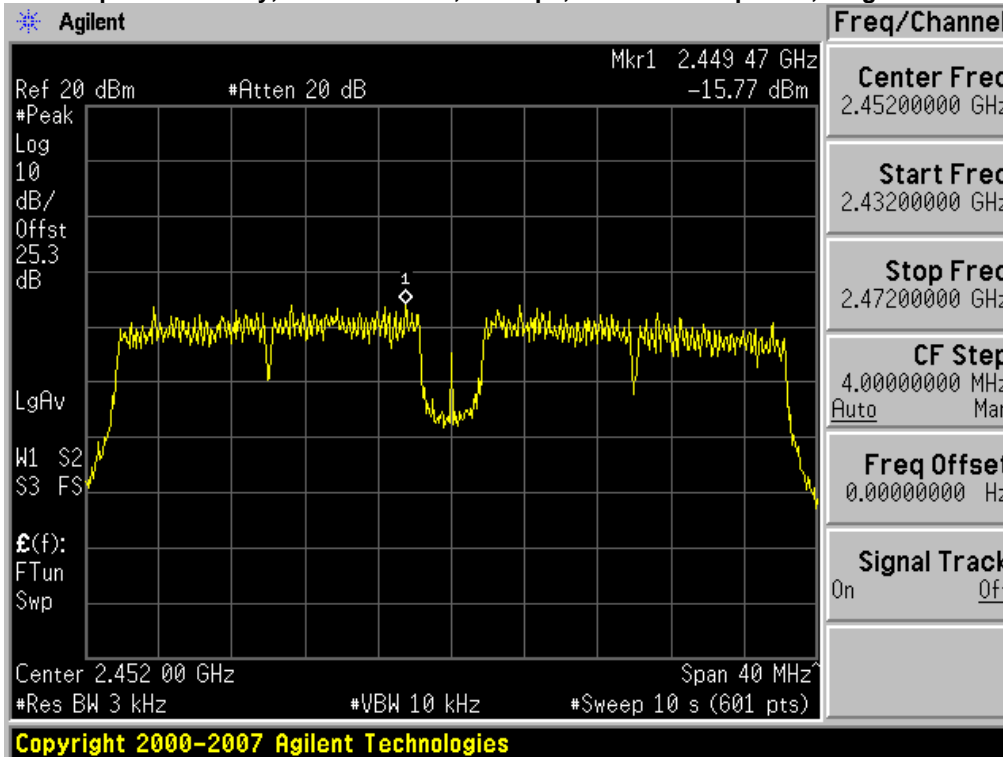


Power Spectral Density, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

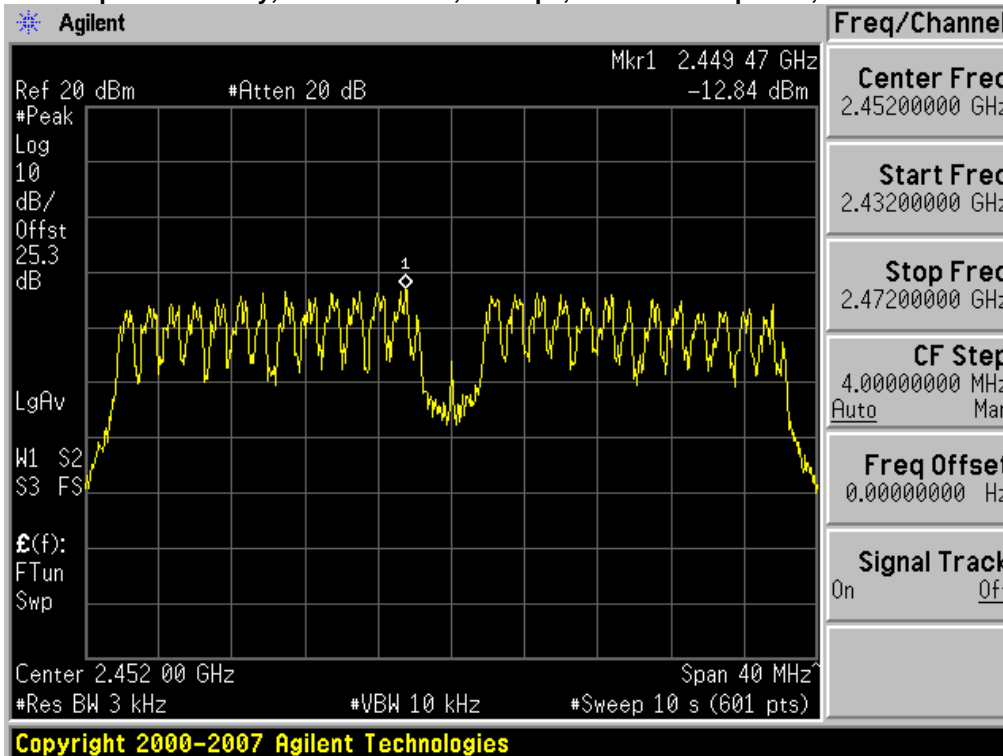






Power Spectral Density, 2442/2462 MHz, M7, HT-40, Single Transmit Paths

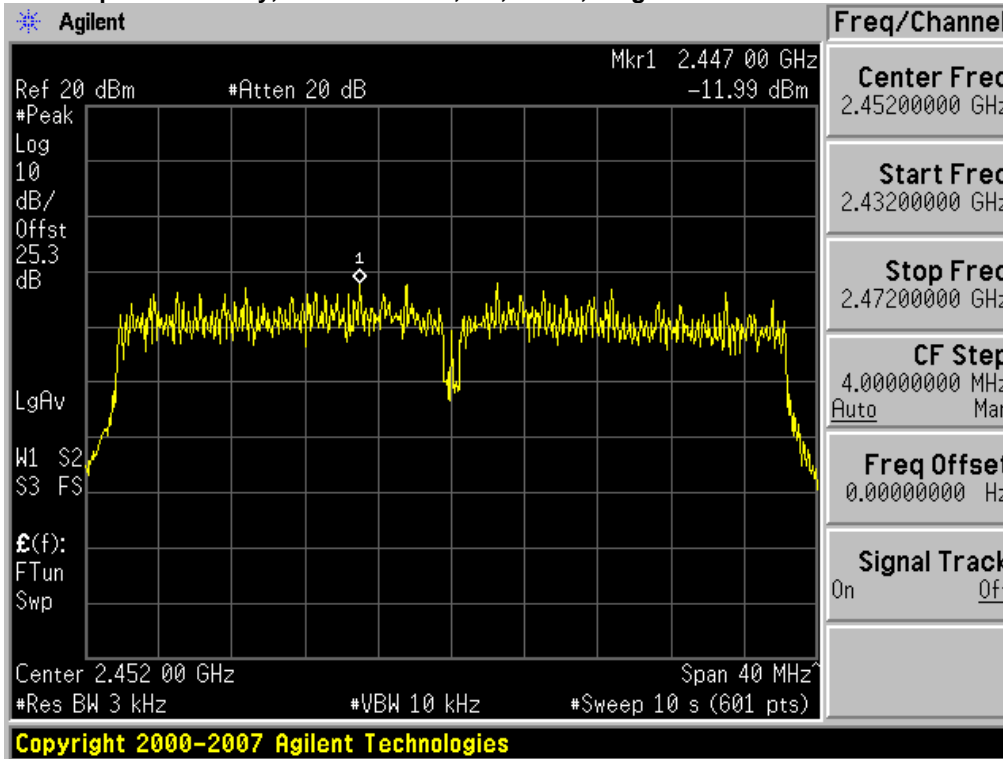

Power Spectral Density, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths

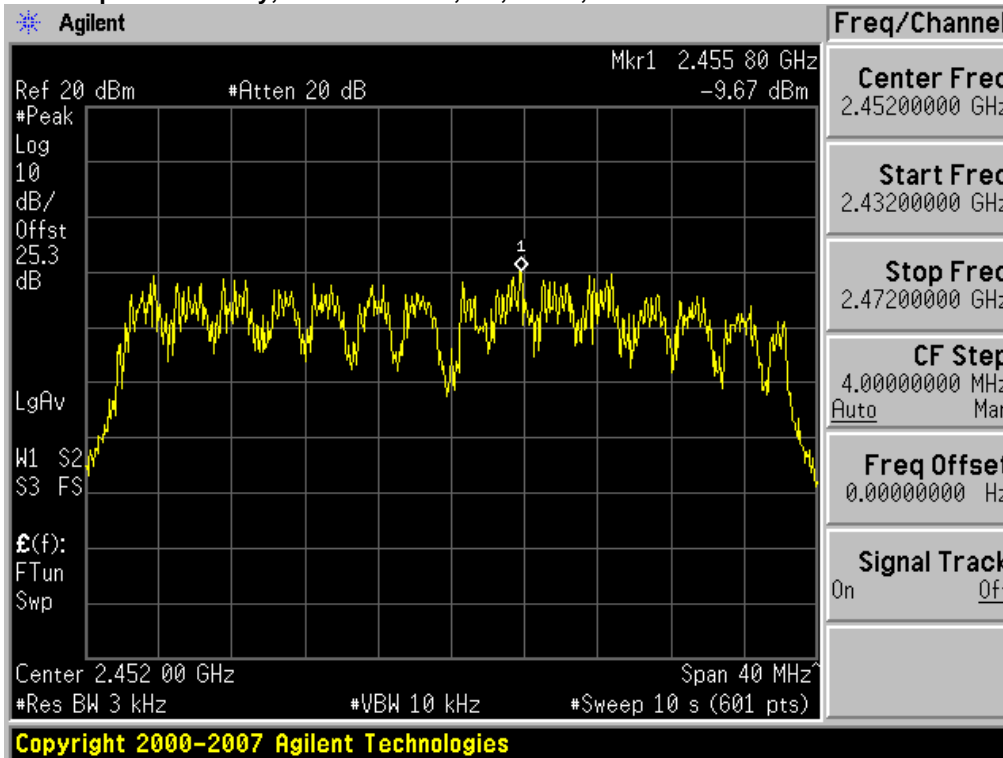



## Conducted Spurious Emissions

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).


Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak

Record the marker waveform peak to spur difference


Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Spur Delta (dB)	Limit (dBc)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	50.0	30	20.0
2412	Legacy CCK, Dual Tx Path	11	56.8	30	26.8
2412	Non HT-20, Single Tx Path	54	57.9	30	27.9
2412	Non HT-20, Dual Tx Path	54	59.4	30	29.4
2412	Non HT-20 Beam Forming	54	56.9	30	26.9
2437	Legacy CCK, Dual Tx Path	11	53.4	30	23.4
2437	Non HT-20 Beam Forming	54	60.1	30	30.1
2462	Legacy CCK, Single Tx Path	11	51.2	30	21.2
2462	Legacy CCK, Dual Tx Path	11	51.6	30	21.6
2462	Non HT-20, Single Tx Path	54	56.4	30	26.4
2462	Non HT-20, Dual Tx Path	54	57.8	30	27.8
2462	Non HT-20 Beam Forming	54	56.7	30	26.7
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	51.3	30	21.3
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	51.7	30	21.7
2412/2432	HT-40, Single Tx Path	M7	53.2	30	23.2
2412/2432	HT-40, Dual Tx Path	M7	56.1	30	26.1
2427/2447	Non HT-40 Duplicate	54	56.0	30	26.0
2427/2447	HT-40	M7	56.7	30	26.7
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	53.1	30	23.1
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	54.4	30	24.4
2442/2462	HT-40, Single Tx Path	M7	51.7	30	21.7
2442/2462	HT-40, Dual Tx Path	M7	58.5	30	28.5



**Conducted Spurs, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths**

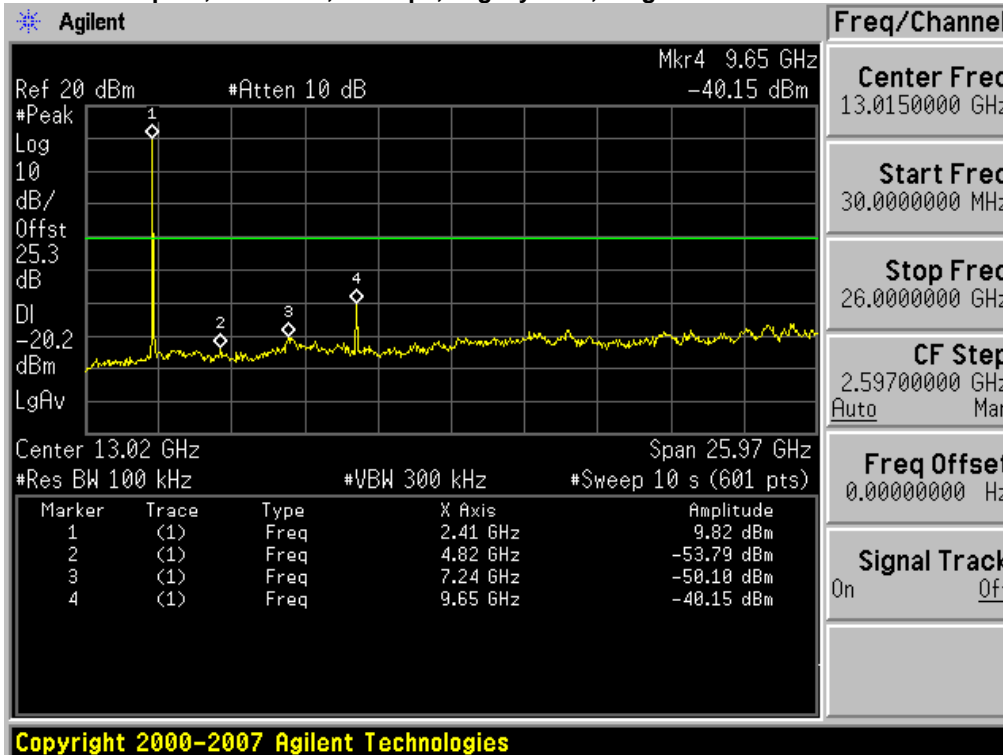


**Conducted Spurs, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**

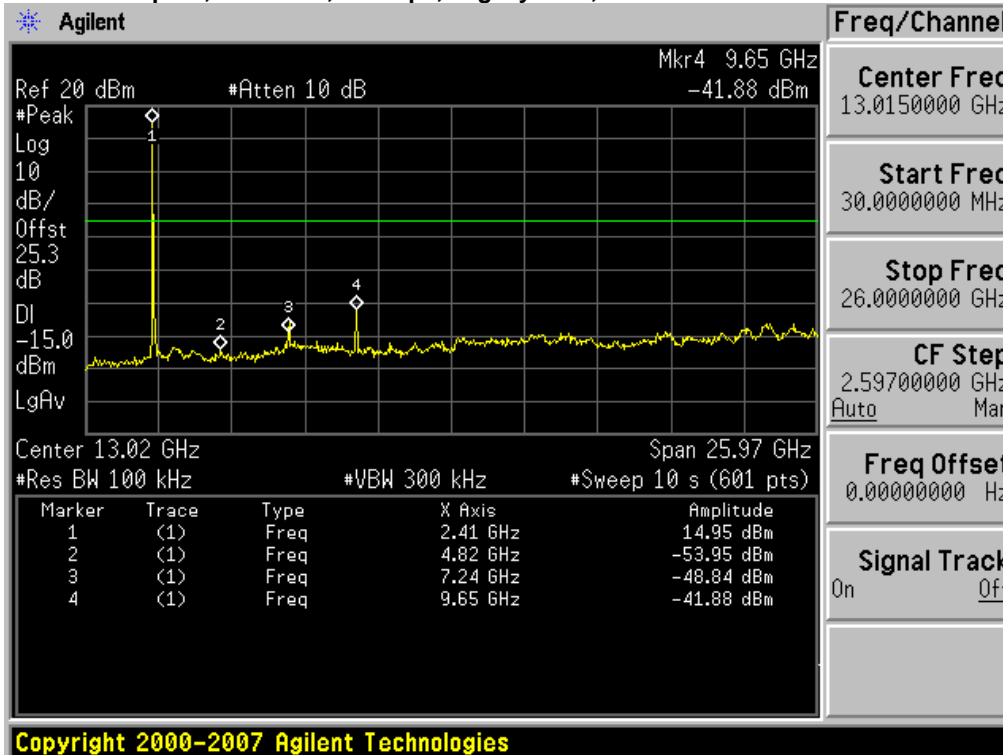




**Conducted Spurs, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths**

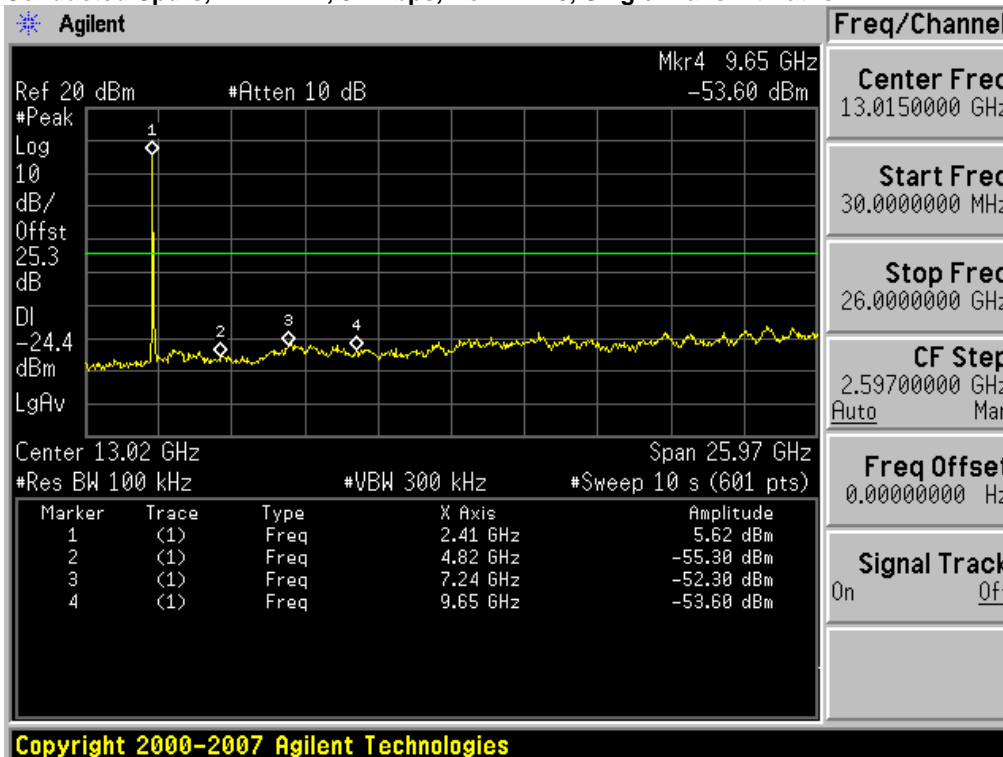


**Conducted Spurs, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths**

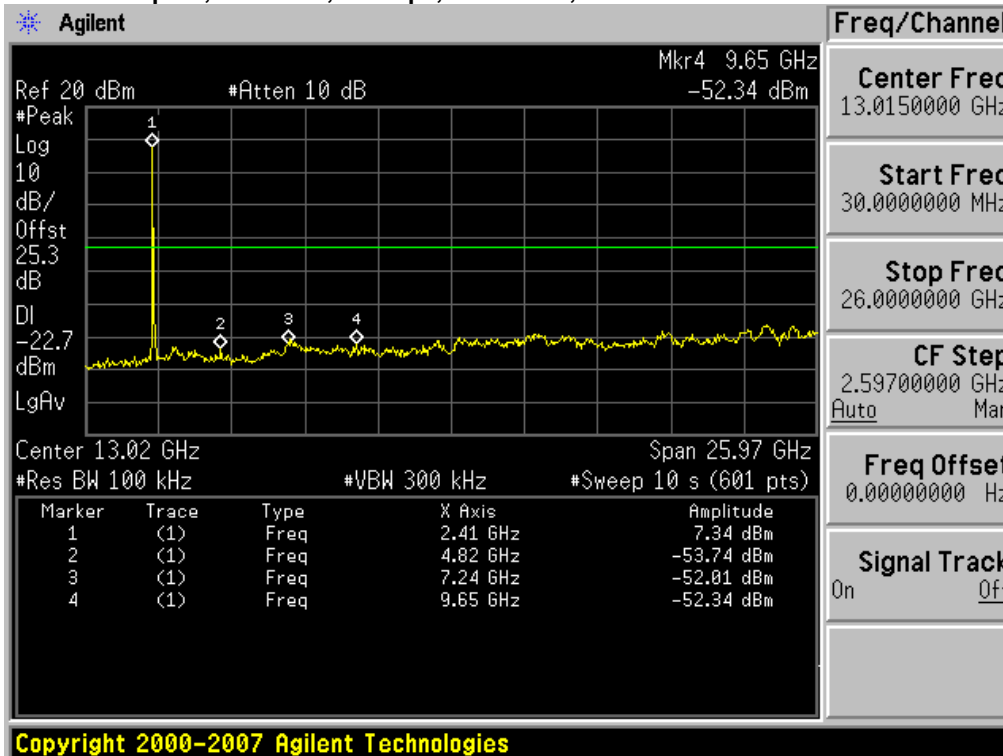




**Conducted Spurs, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

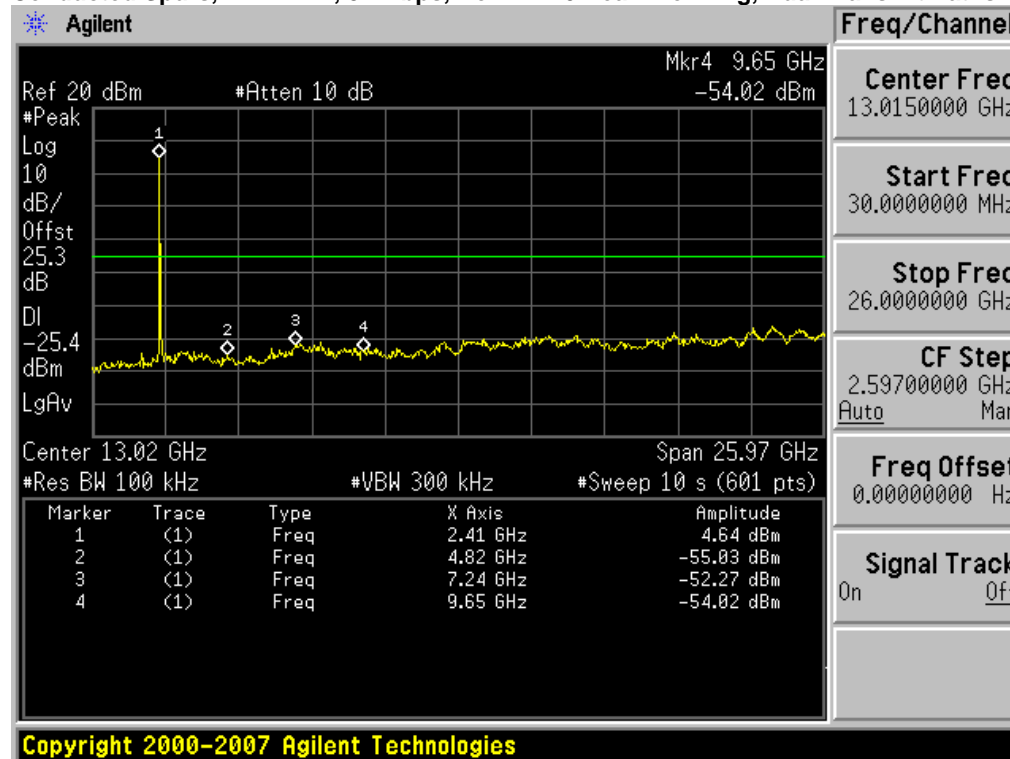


**Conducted Spurs, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**

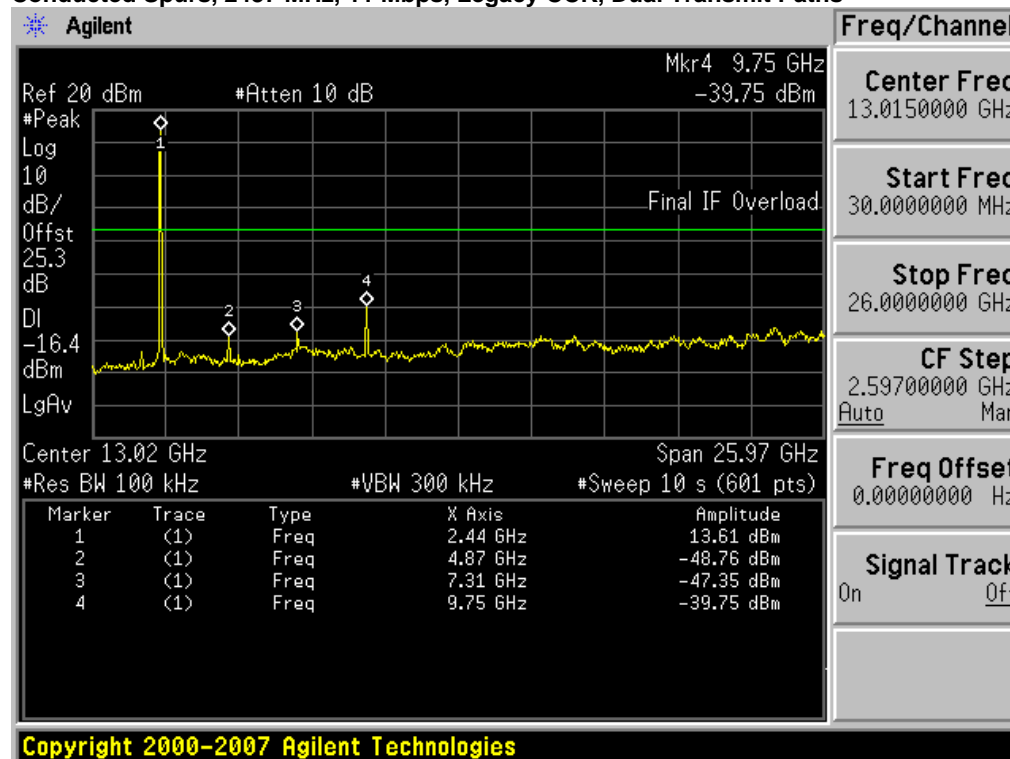




**Conducted Spurs, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

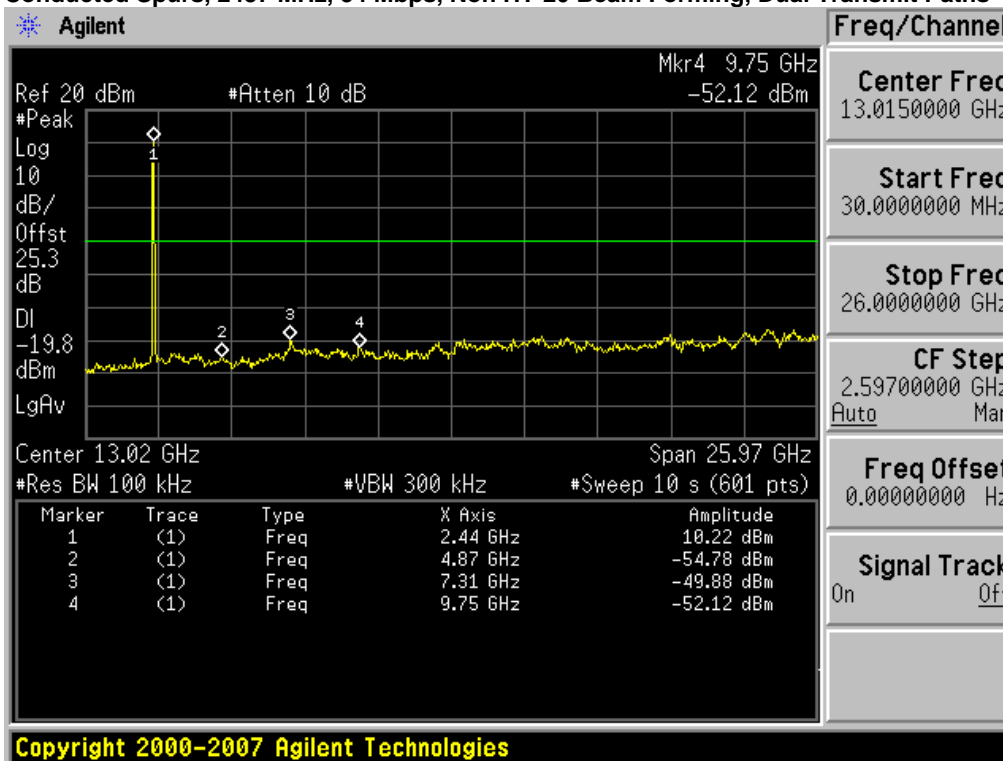


**Conducted Spurs, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths**

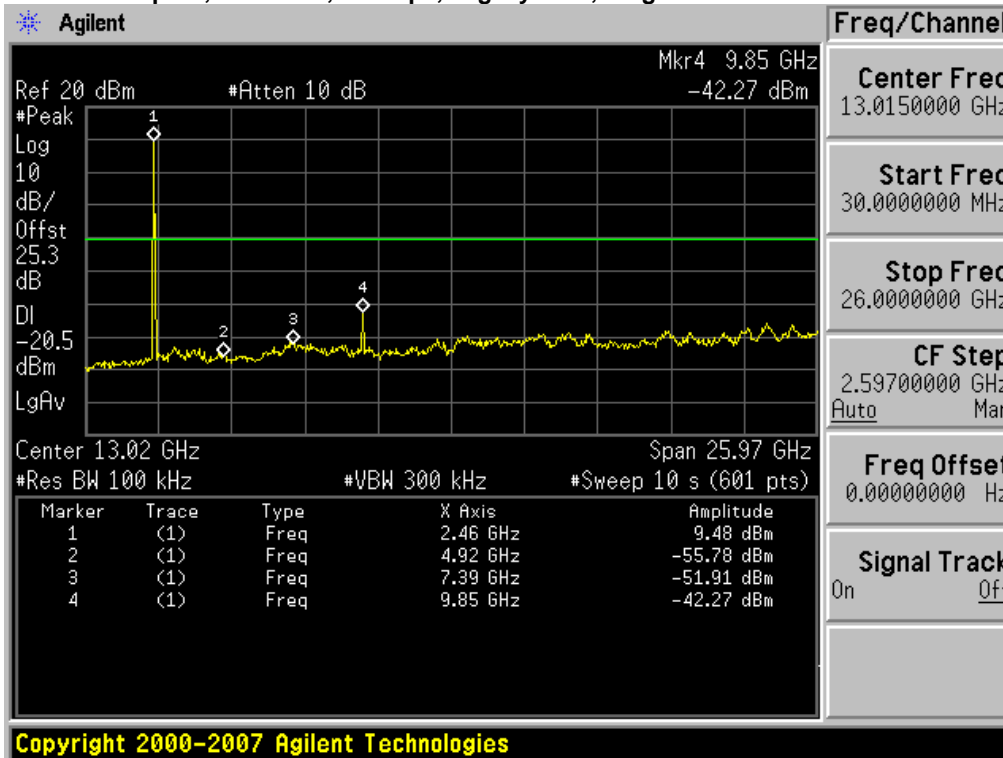




**Conducted Spurs, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**

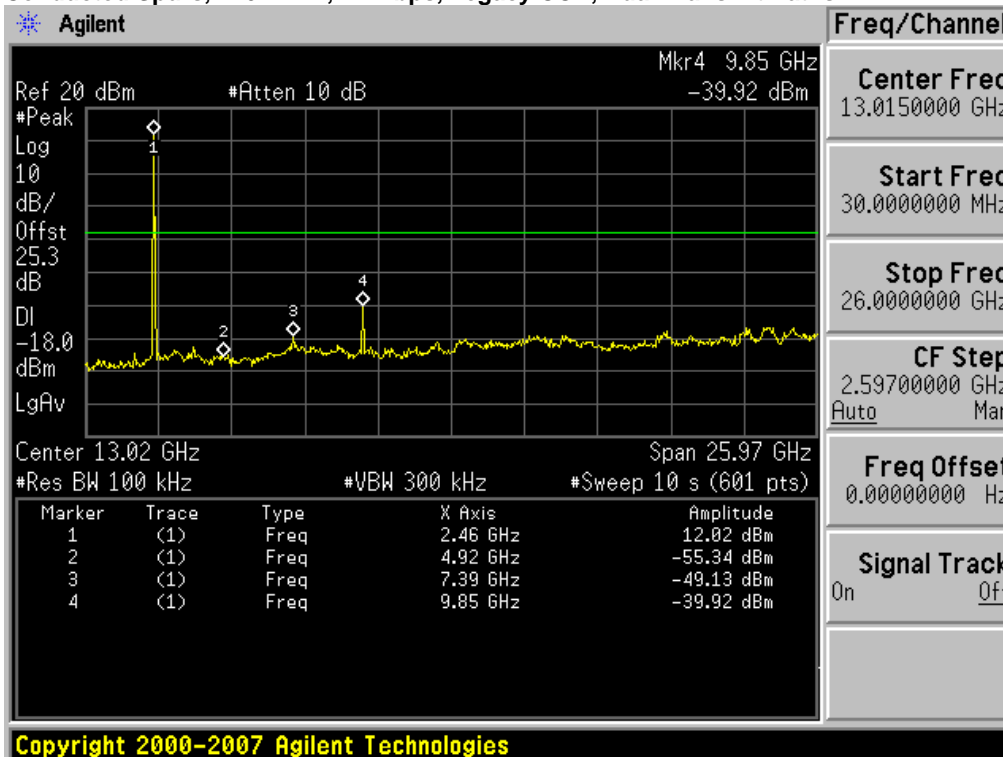


**Conducted Spurs, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths**

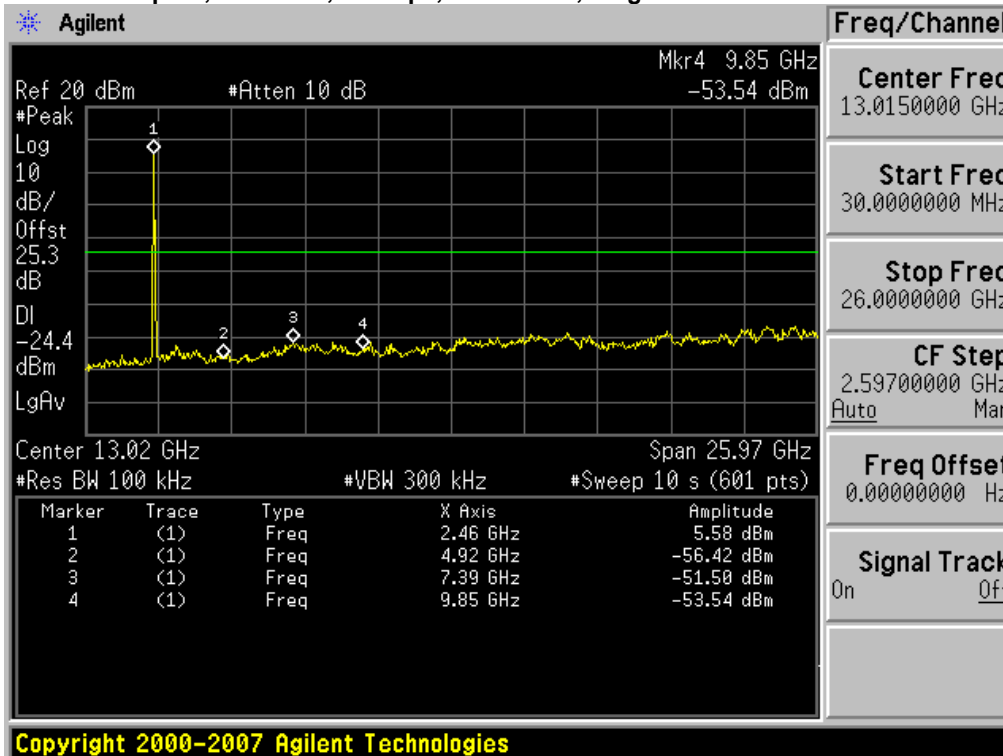




**Conducted Spurs, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths**

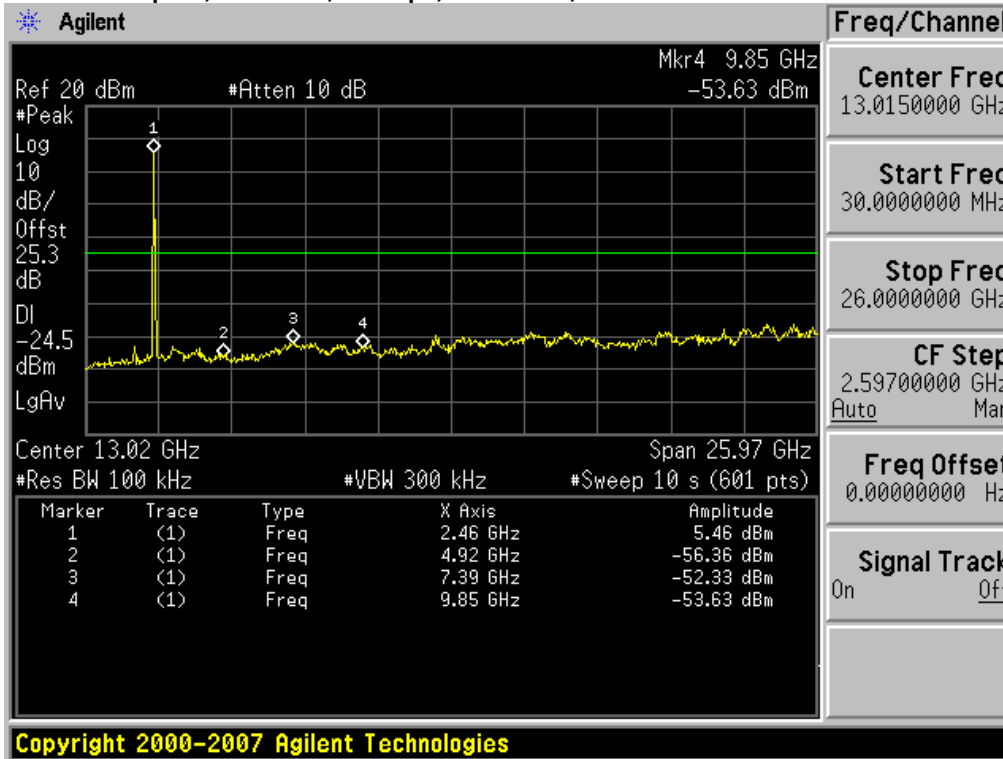


**Conducted Spurs, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**

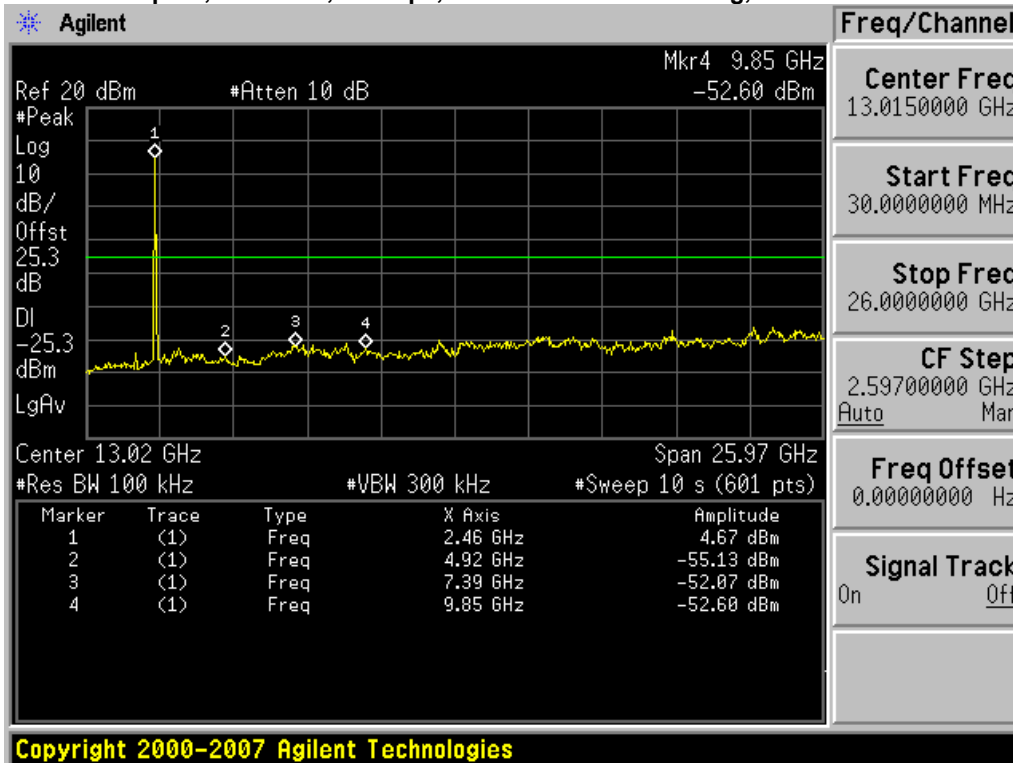






**Conducted Spurs, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths**

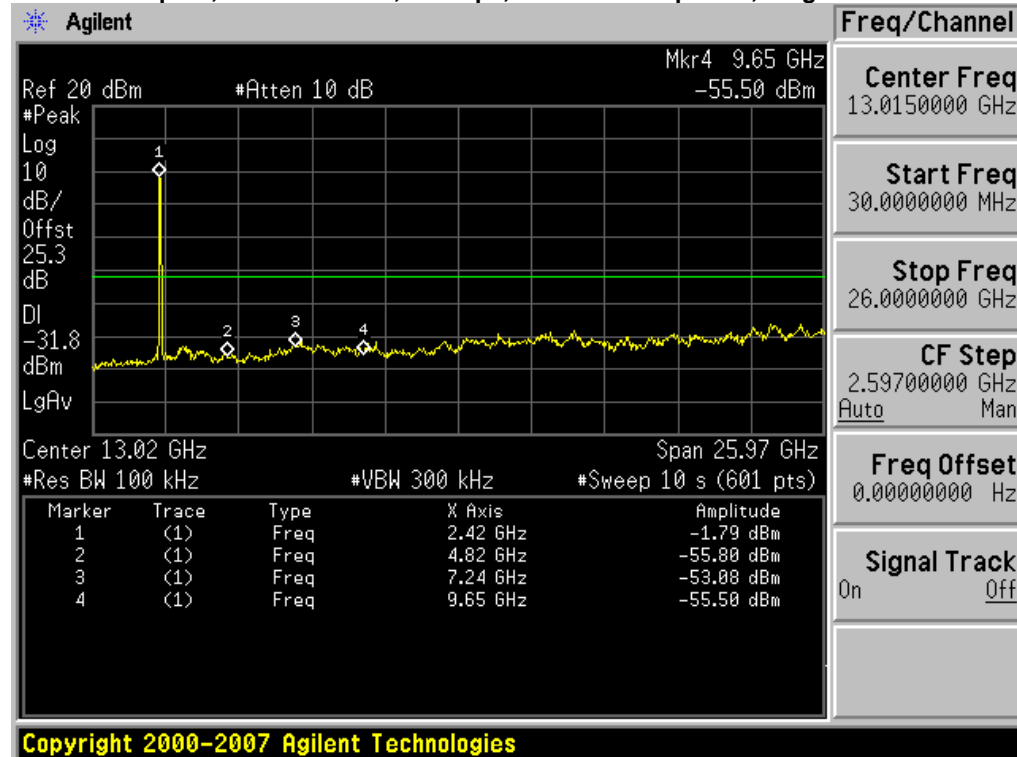


**Conducted Spurs, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths**

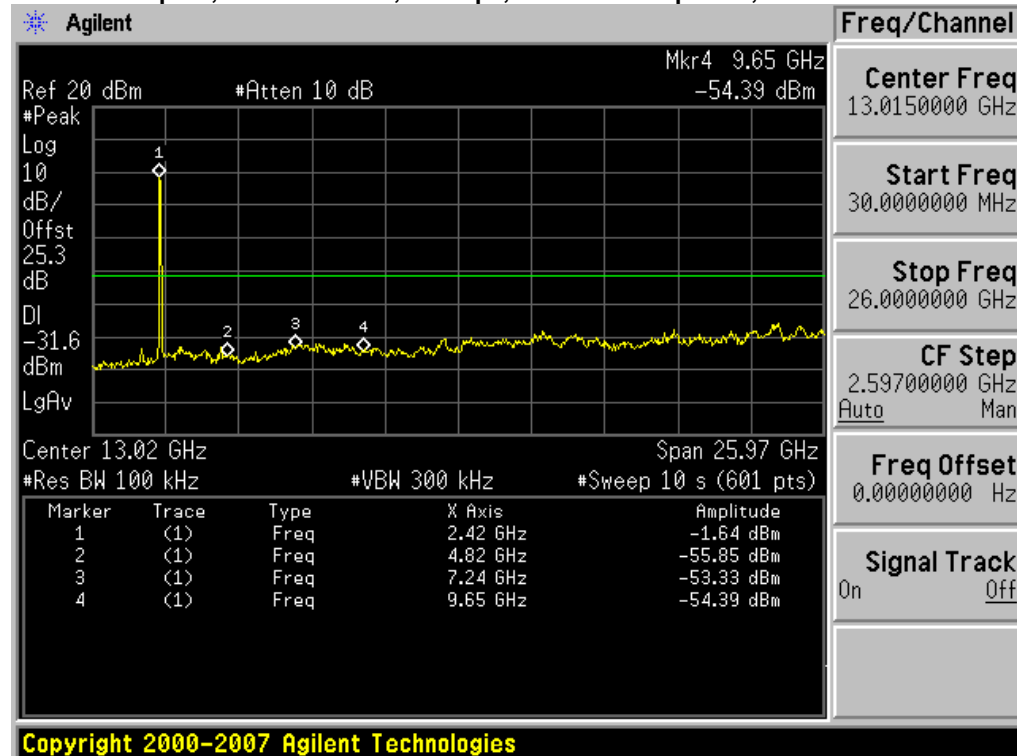




Conducted Spurs, 2412/2432 MHz, M7, HT-40, Single Transmit Paths

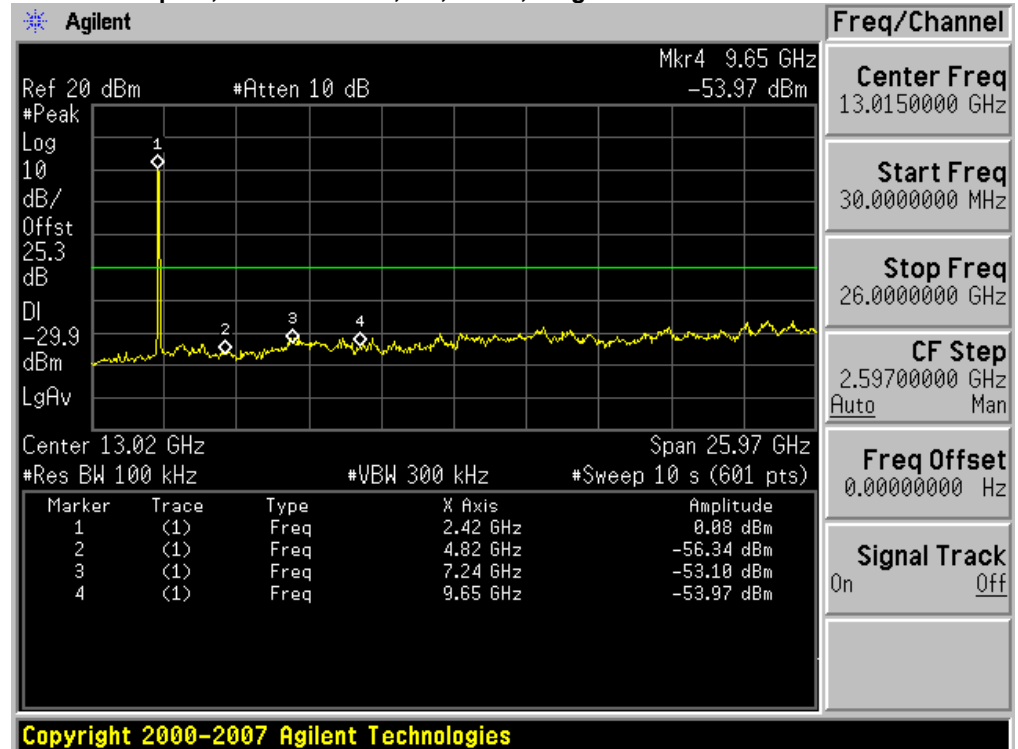


Conducted Spurs, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths

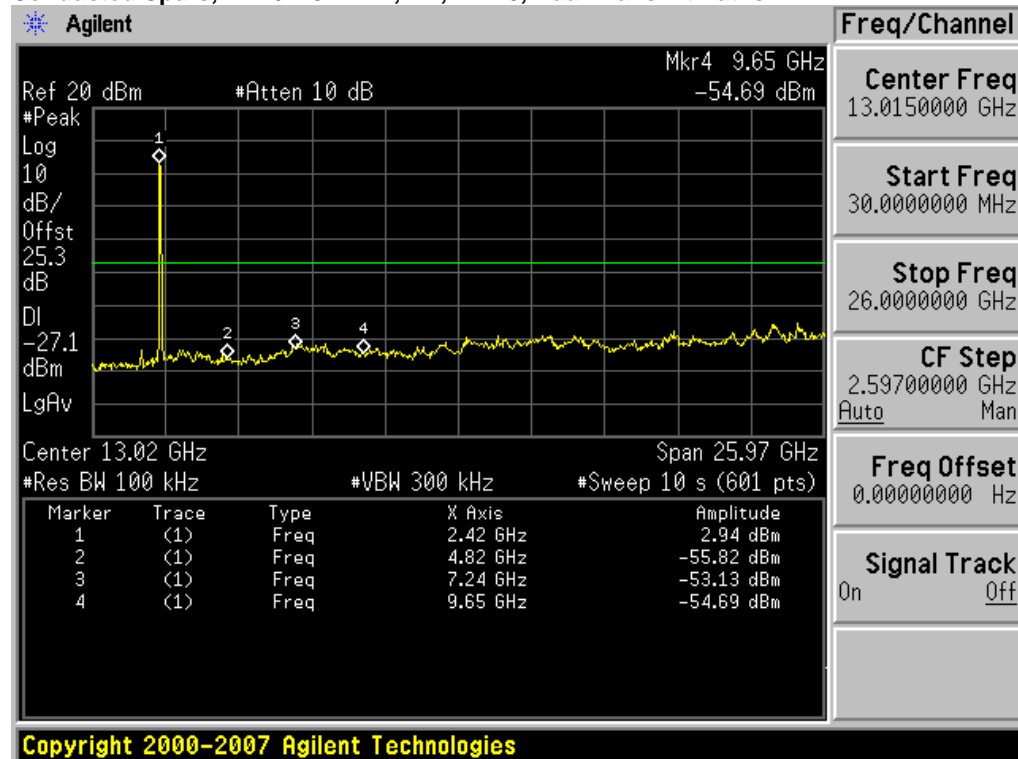




**Conducted Spurs, 2427/2447 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths**

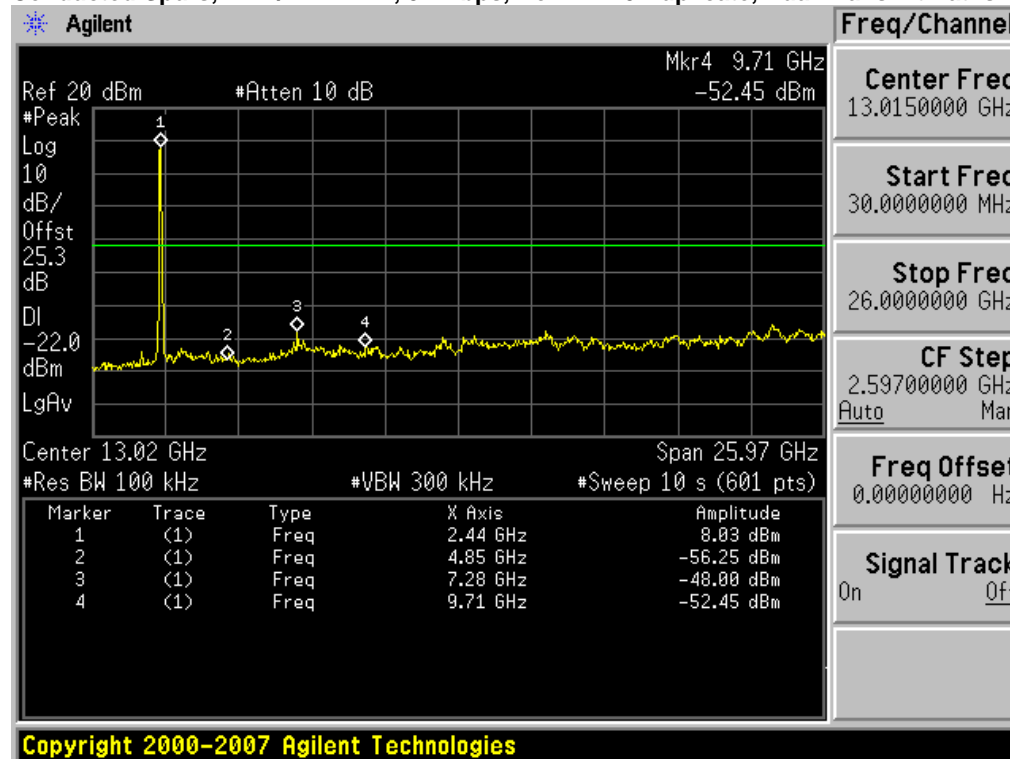


**Conducted Spurs, 2427/2447 MHz, M7, HT-40, Dual Transmit Paths**

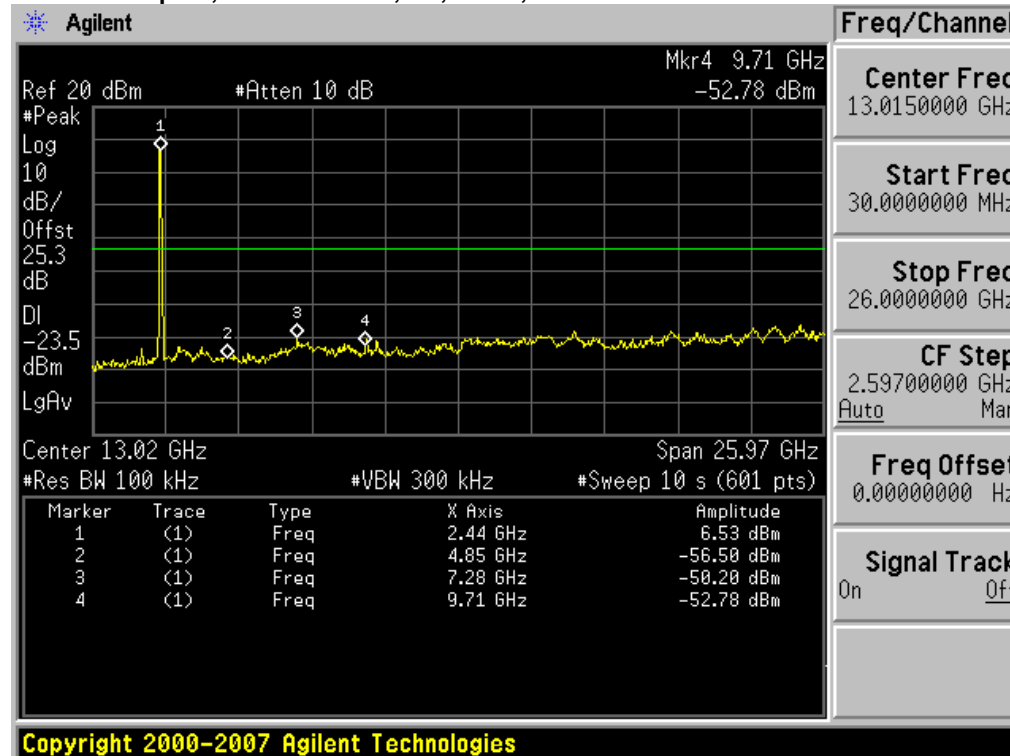




**Conducted Spurs, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths**

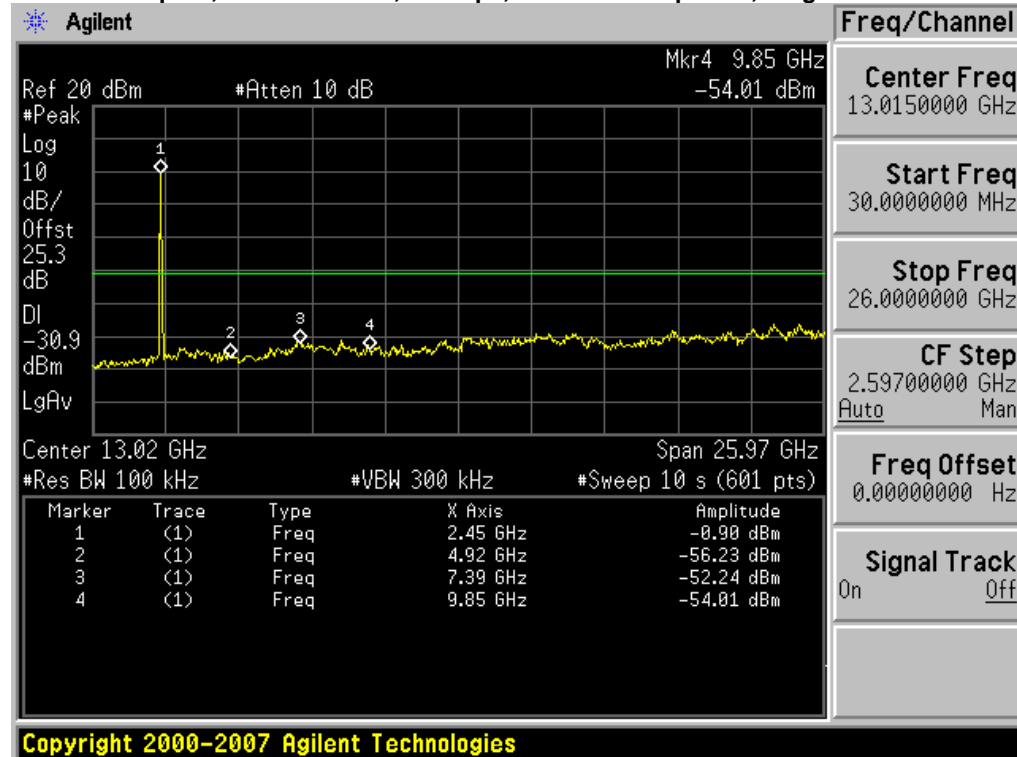


**Conducted Spurs, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths**

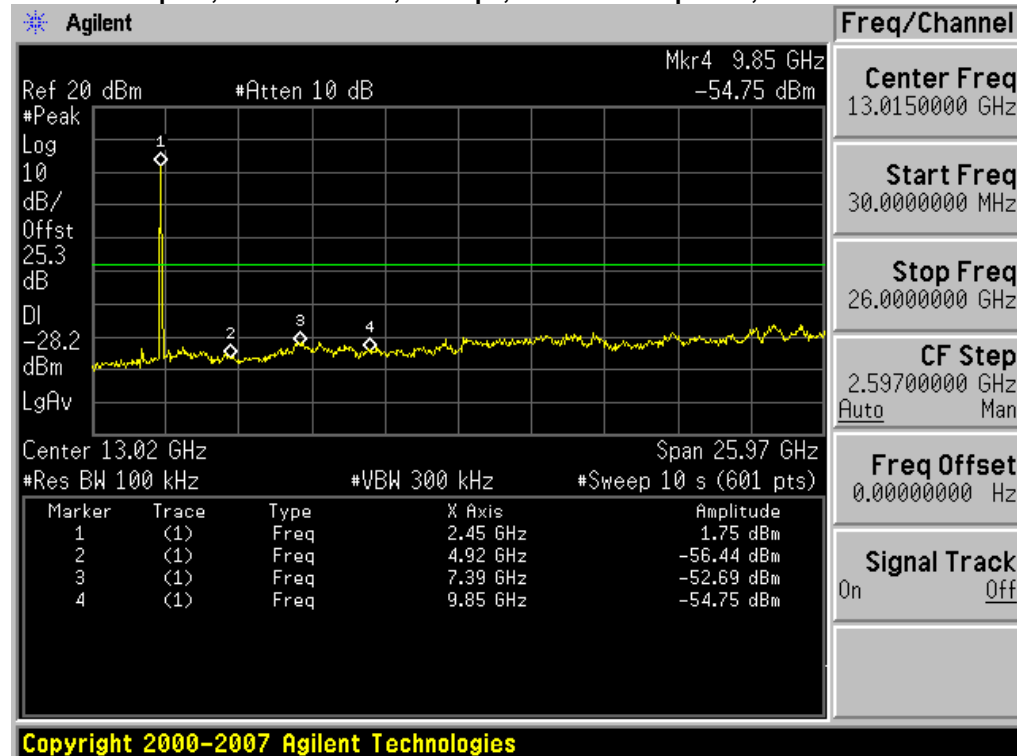





**Conducted Spurs, 2442/2462 MHz, M7, HT-40, Single Transmit Paths**

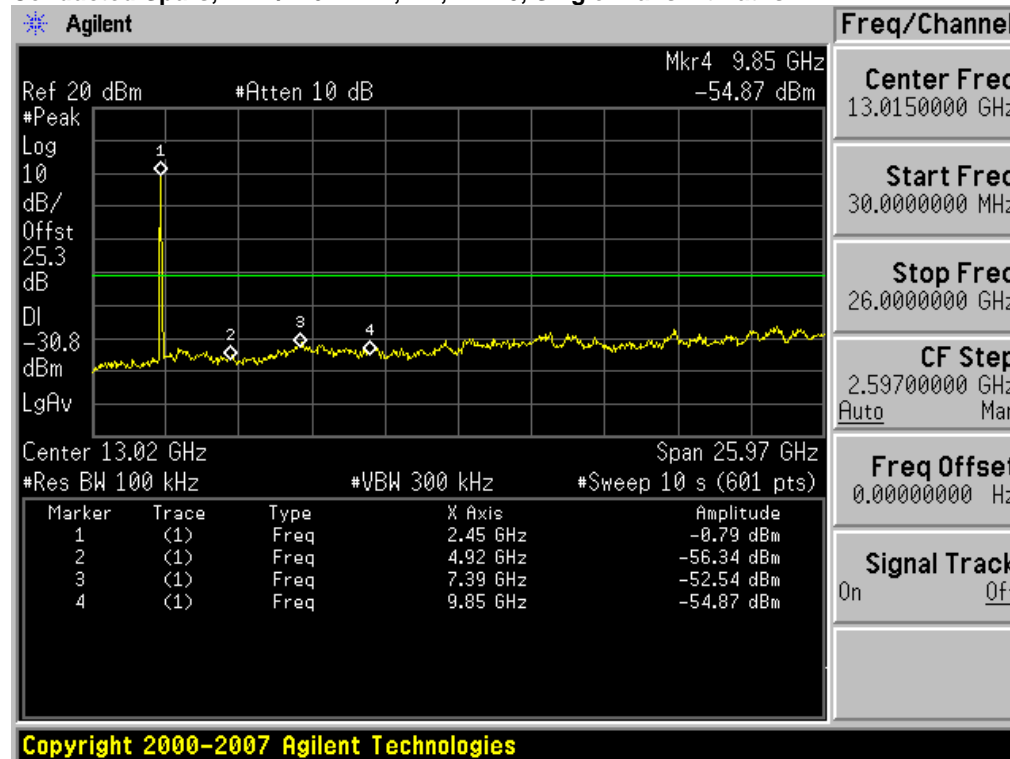

**Conducted Spurs, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths**

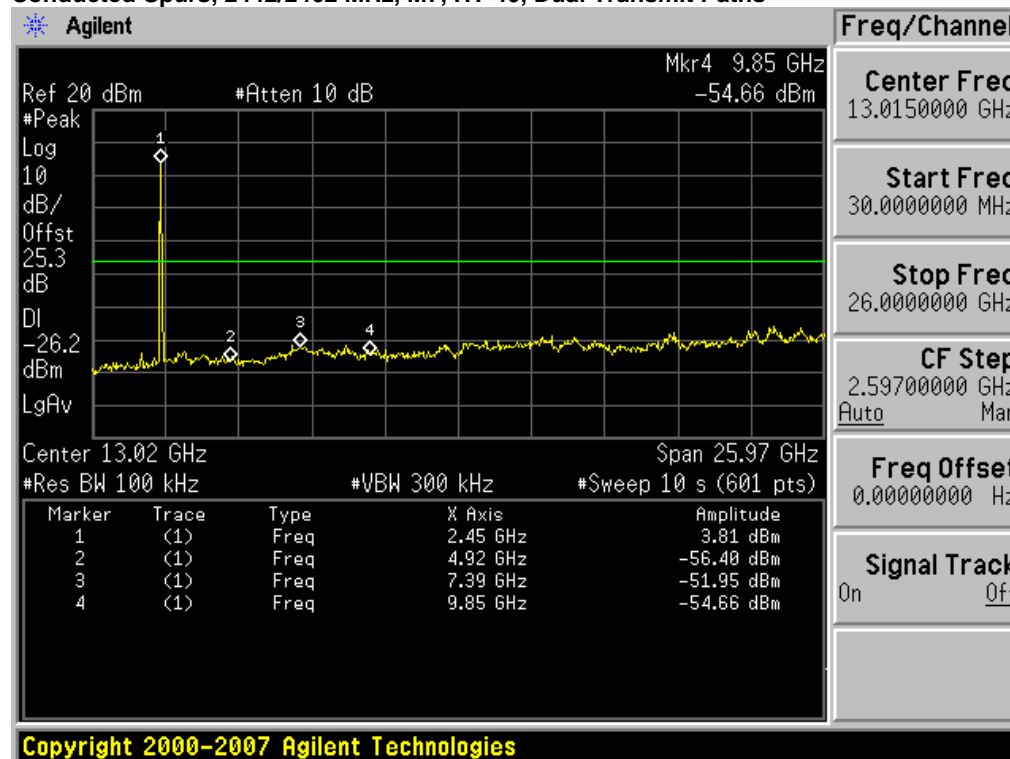

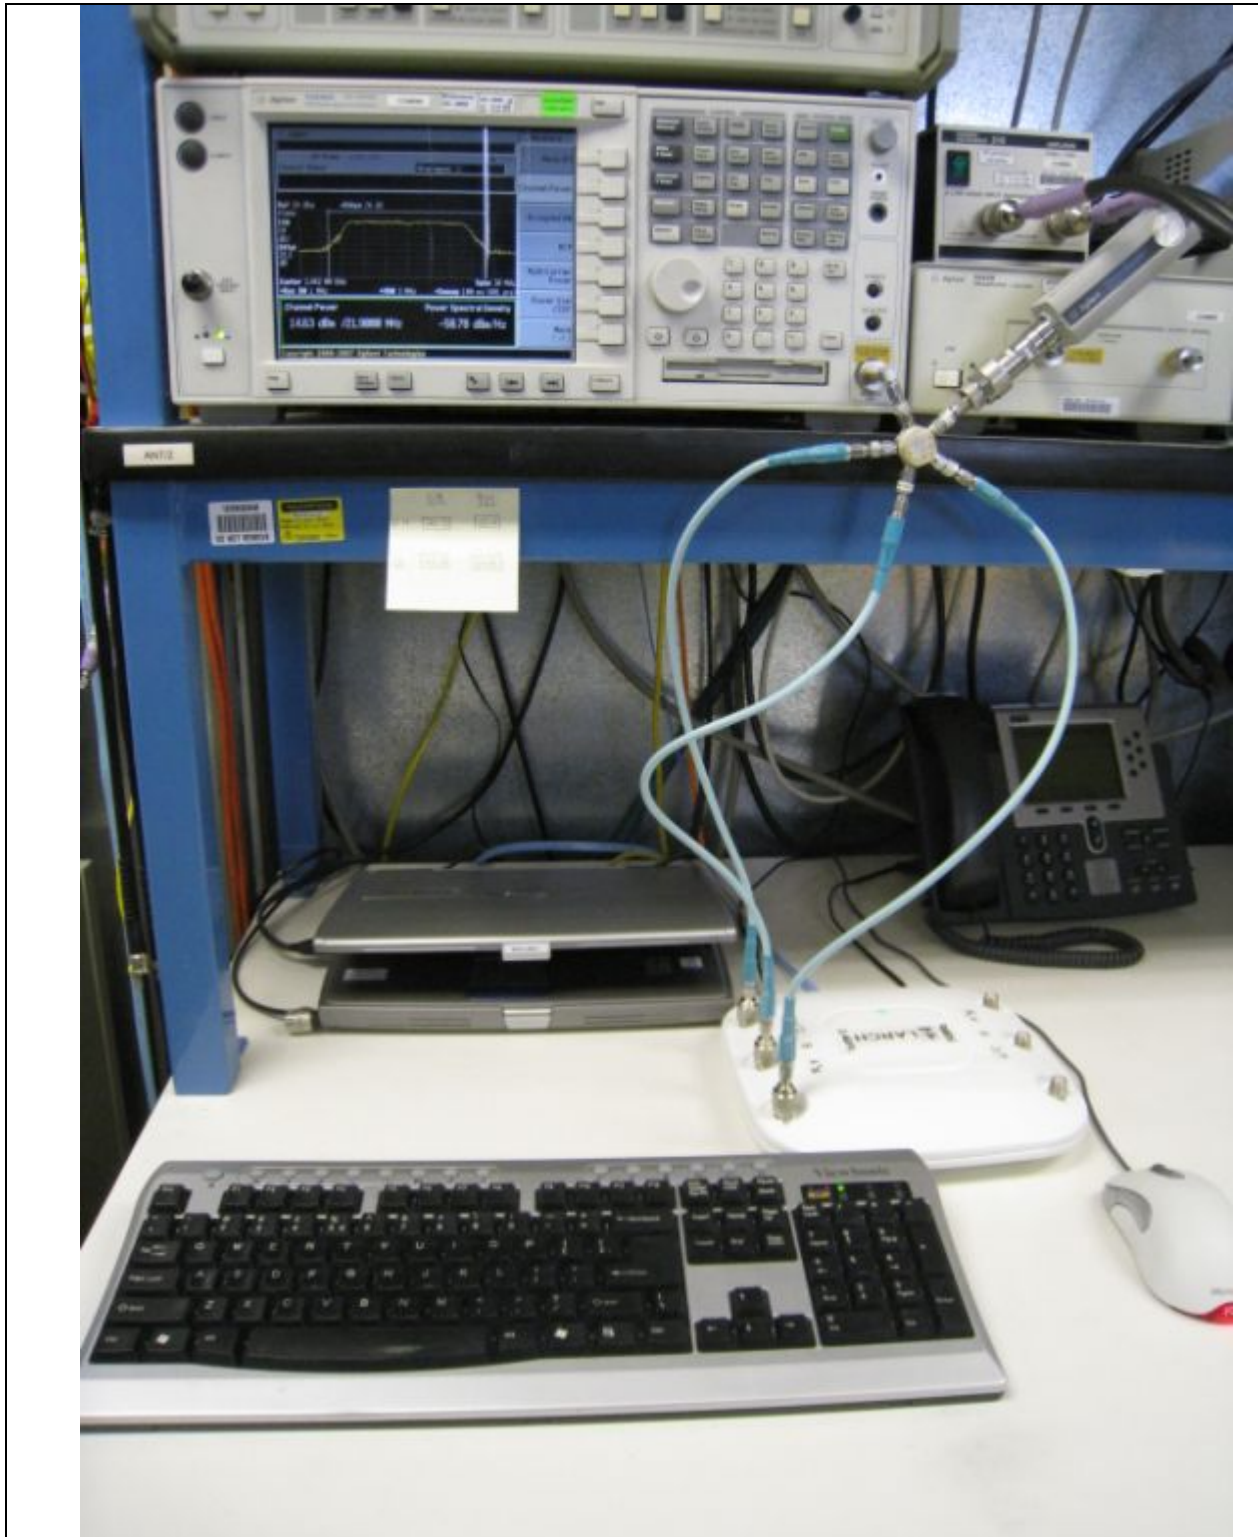

**Title:** Conducted Test Setup



## **Appendix B: Emission Test Results**

**Testing Laboratory:** Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

### Radiated Bandedge

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Reference Level:	110 dBuV
Attenuation:	20 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 10 Hz for average
Detector:	Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots:    1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m  
                  2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
Also measure any emissions in the restricted bands.




The following data reflects the worst-case emissions for all supported antennas from 0-3 dBi.

Frequency (MHz)	Mode	Data Rate (Mbps)	Target Total Transmit Power Level (dBm)	Radiated Band Edge Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	20	47.0	54	7.0
2412	Legacy CCK, Dual Tx Path	11	23	49.8	54	4.2
2412	Non HT-20, Single Tx Path	54	17	49.2	54	4.8
2412	Non HT-20, Dual Tx Path	54	20	49.3	54	4.7
2412	Non HT-20 Beam Forming	54	19	50.0	54	4.0
2462	Legacy CCK, Single Tx Path	11	20	47.8	54	6.2
2462	Legacy CCK, Dual Tx Path	11	23	52.0	54	2.0
2462	Non HT-20, Single Tx Path	54	17	49.6	54	4.4
2462	Non HT-20, Dual Tx Path	54	20	51.5	54	2.5
2462	Non HT-20 Beam Forming	54	17	51.8	54	2.2
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	14	53.1	54	1.0
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	16	50.0	54	4.0
2412/2432	HT-40, Single Tx Path	M7	16	52.6	54	1.4
2412/2432	HT-40, Dual Tx Path	M7	18	52.6	54	1.4
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	14	51.7	54	2.3
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	16	52.2	54	1.9
2442/2462	HT-40, Single Tx Path	M7	16	51.7	54	2.3
2442/2462	HT-40, Dual Tx Path	M7	17	52.2	54	1.8






**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

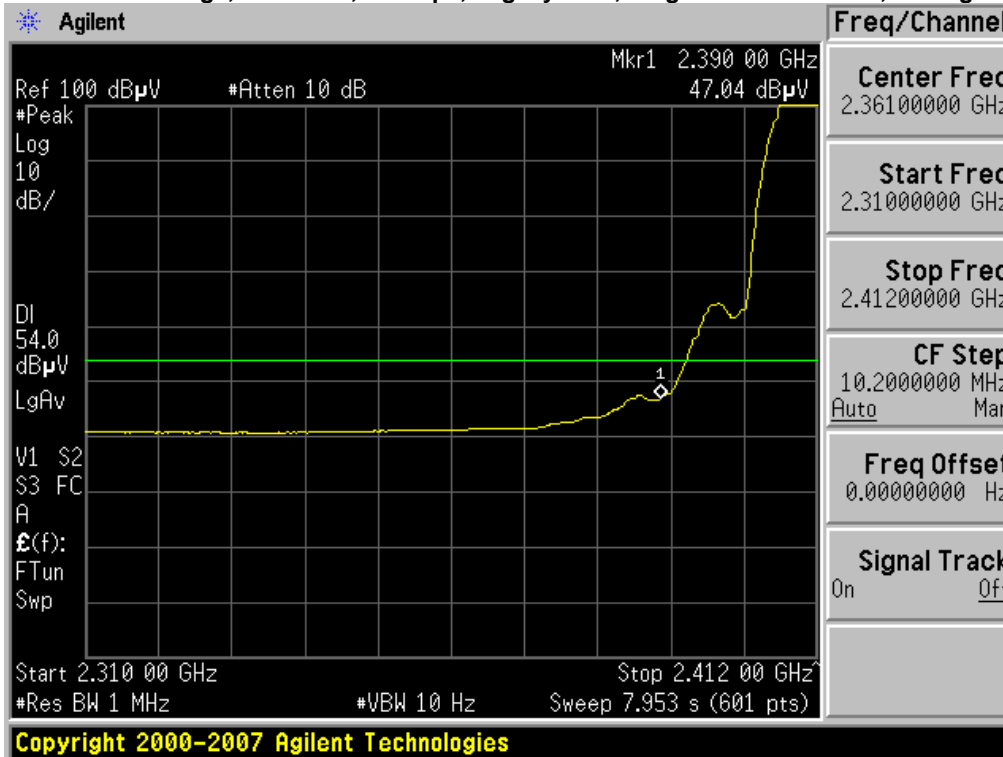


**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

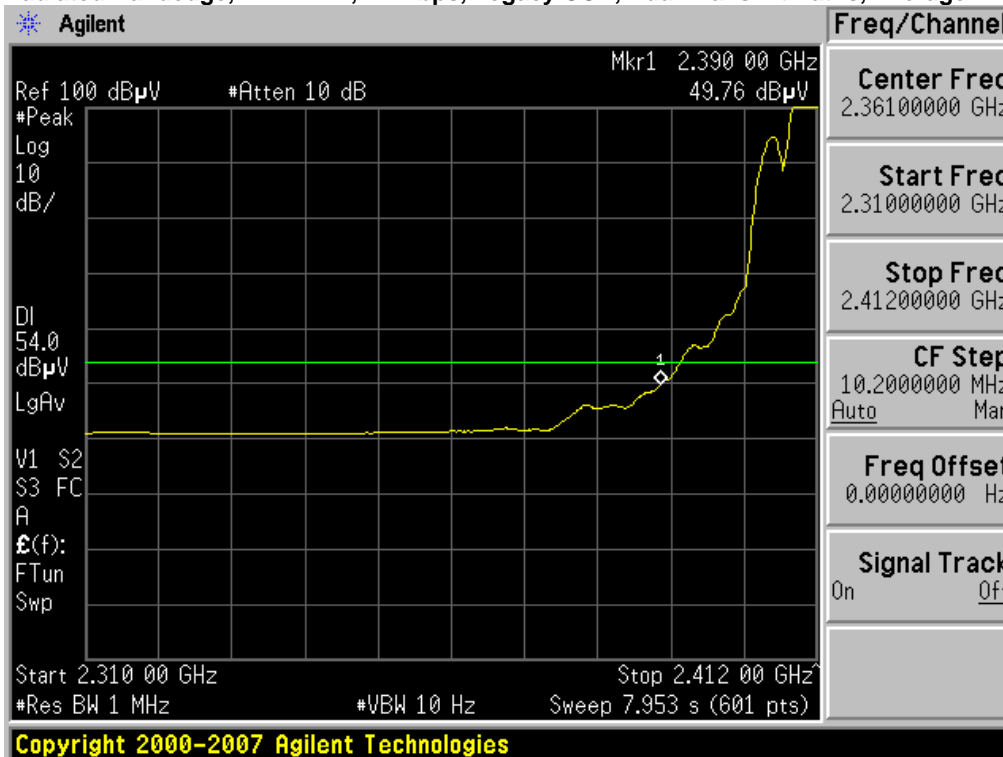



**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Average**

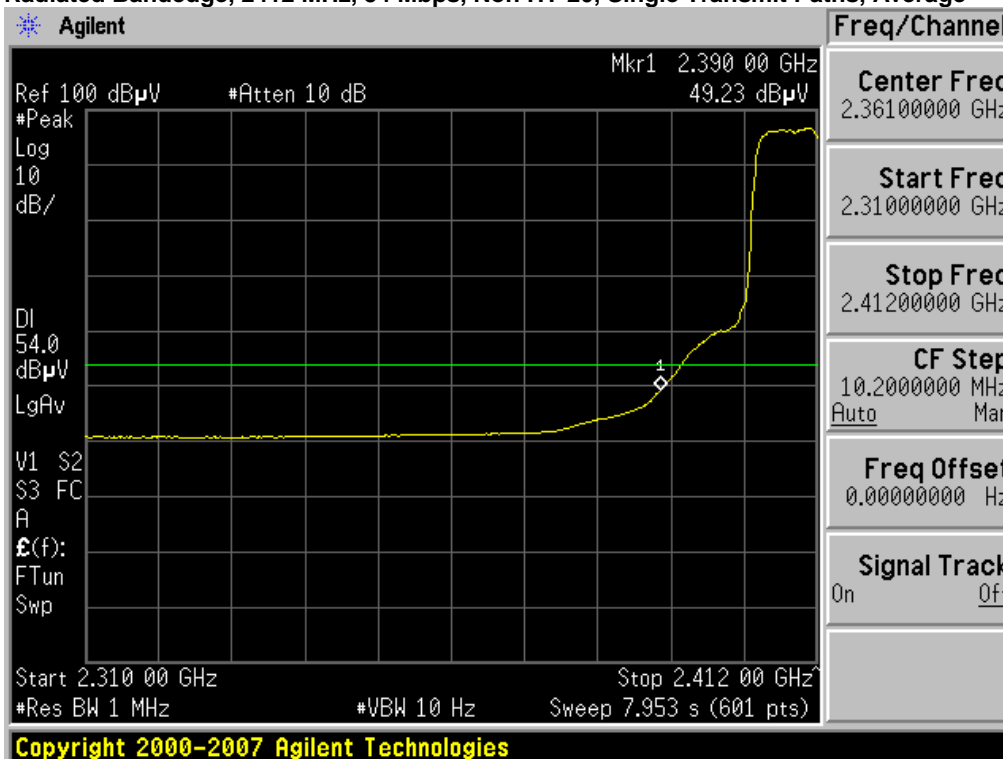


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average**






**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average**

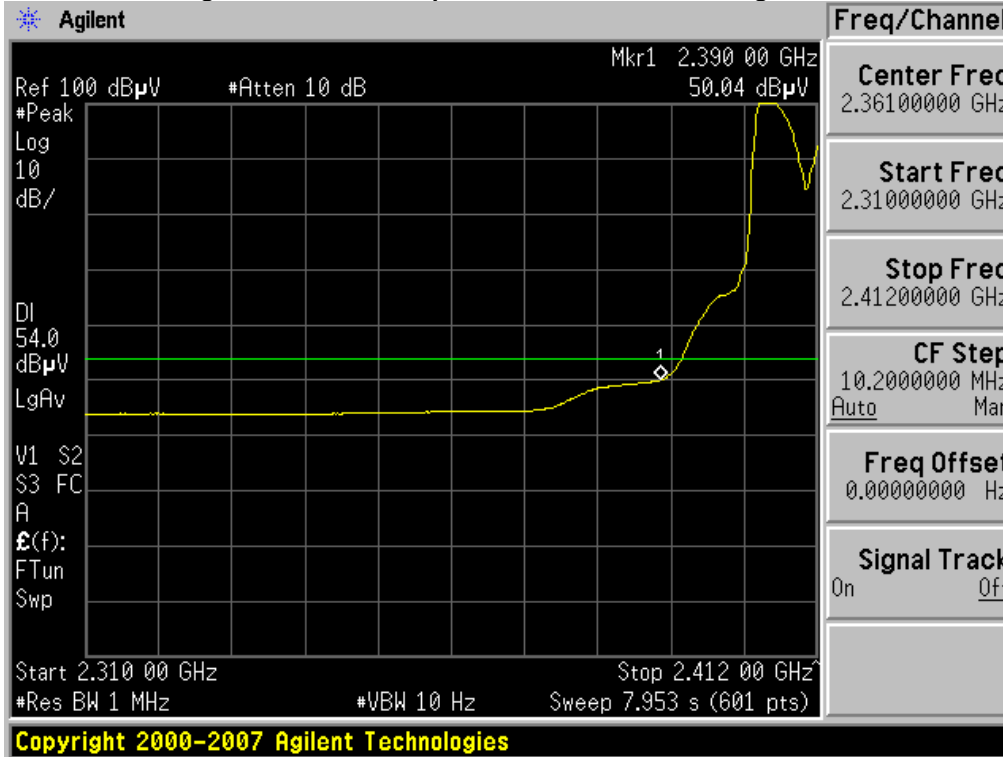


**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

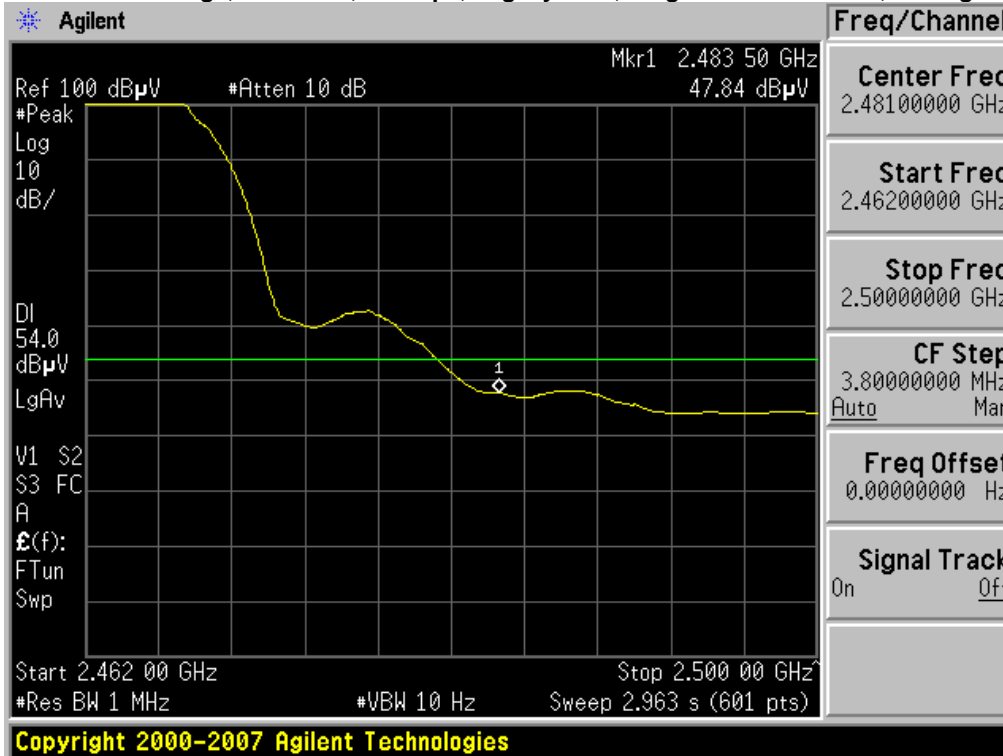




**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

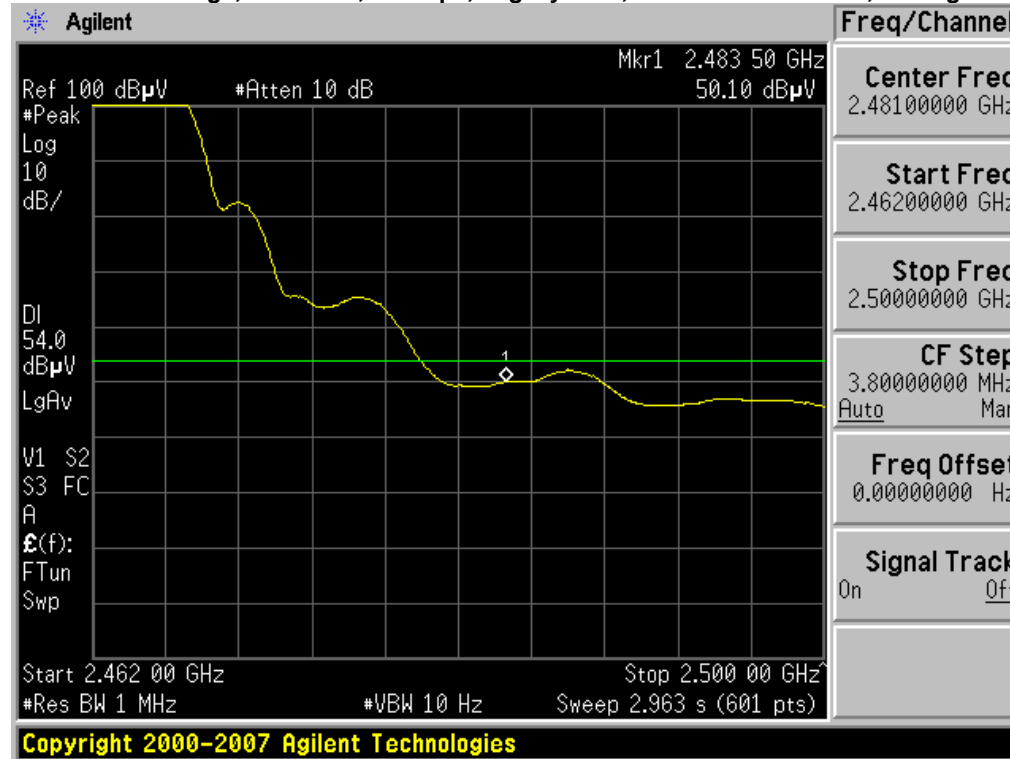


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Average**

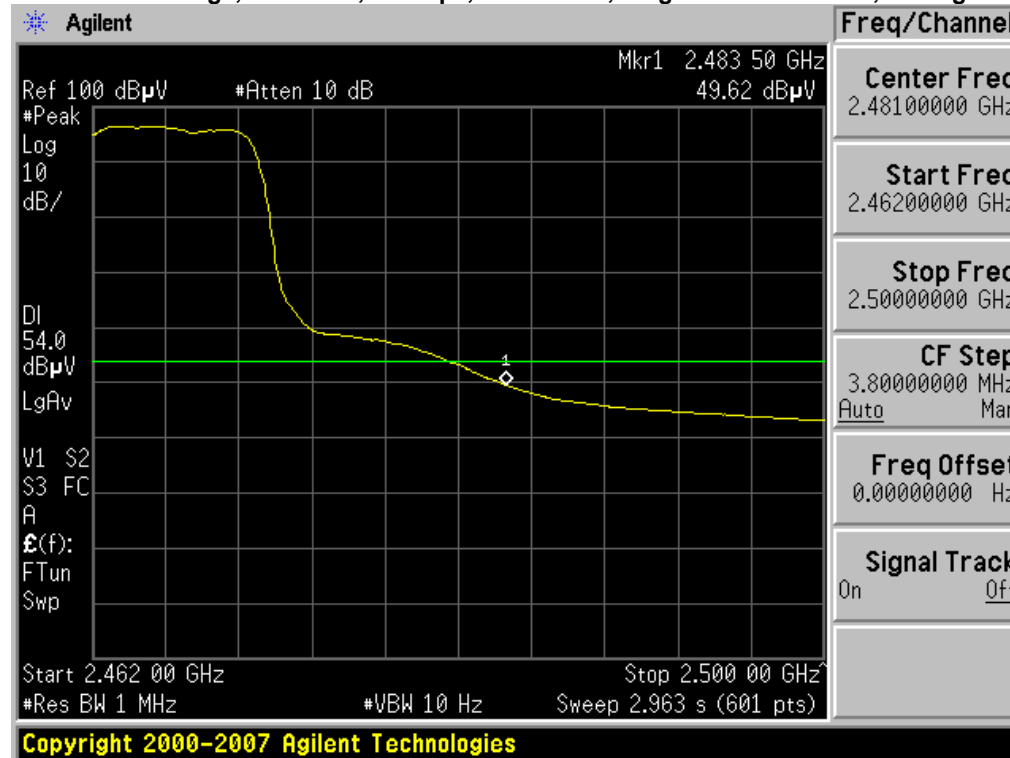



**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average**

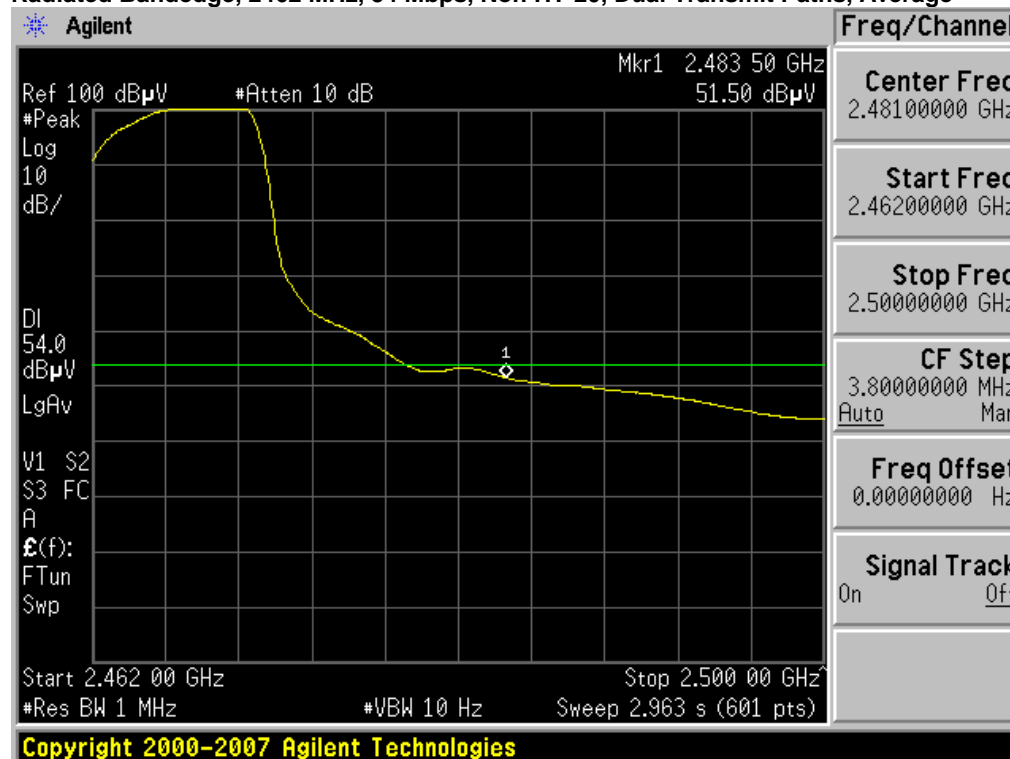


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average**






**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average**

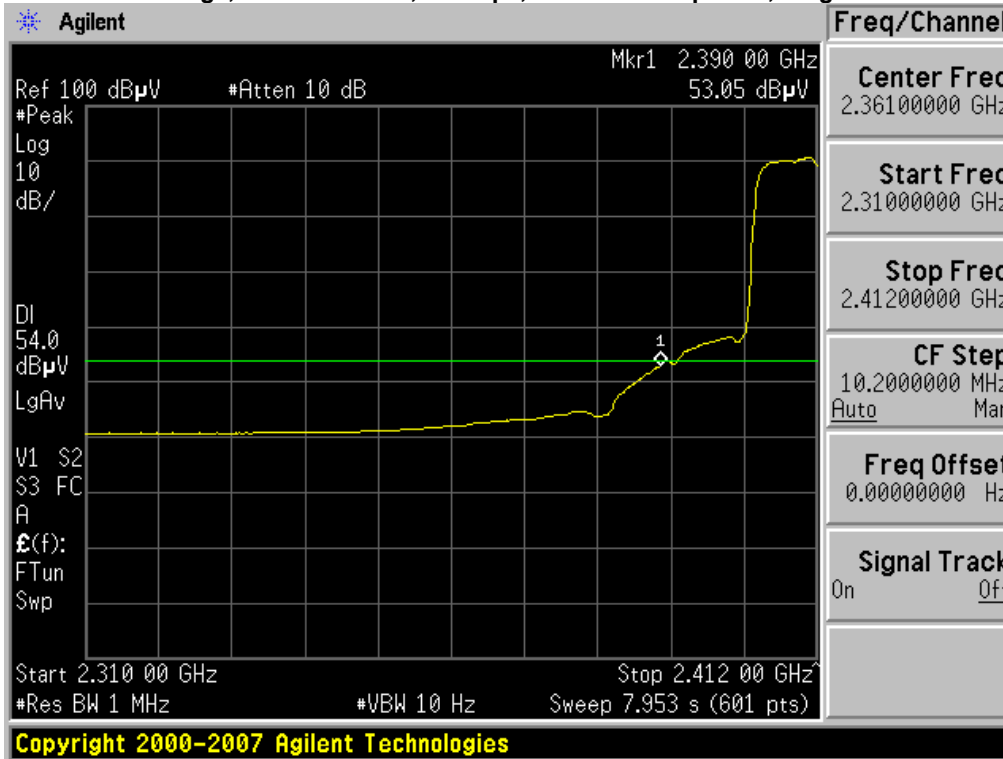


**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

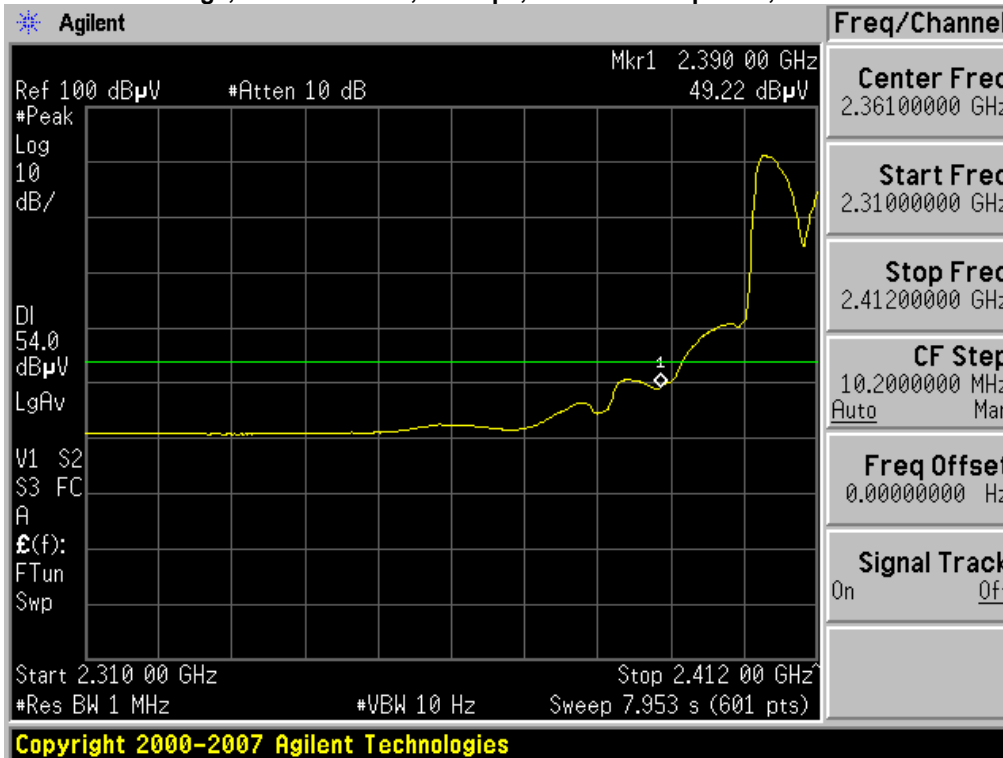




**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Average**

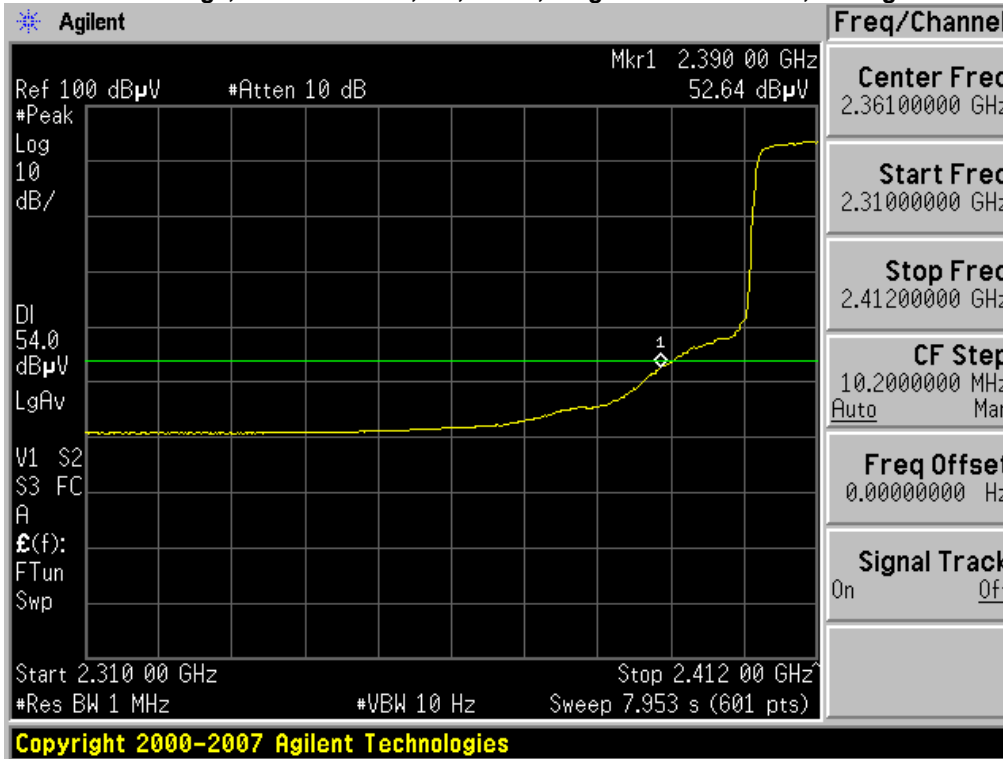


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Average**

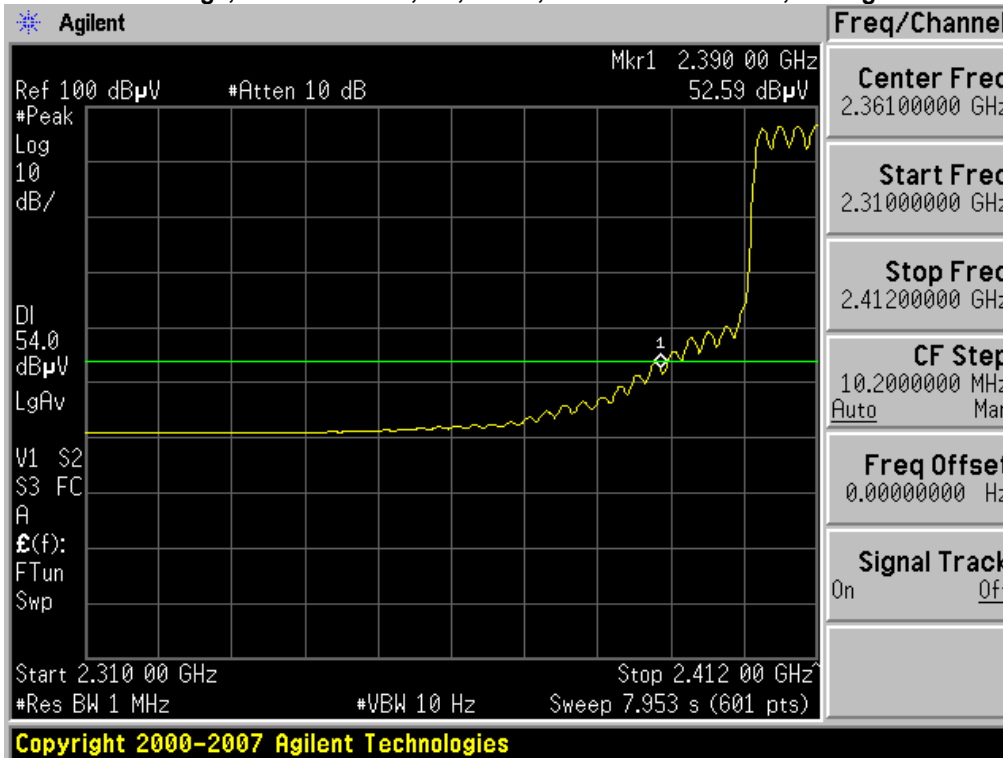




Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average

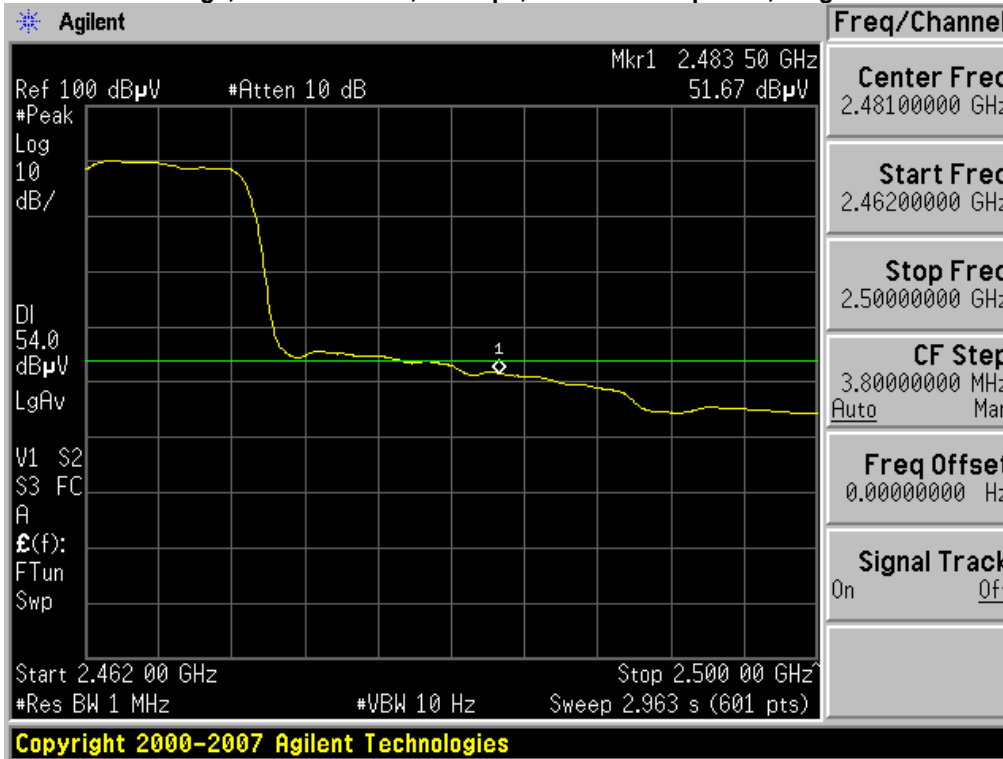


Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average

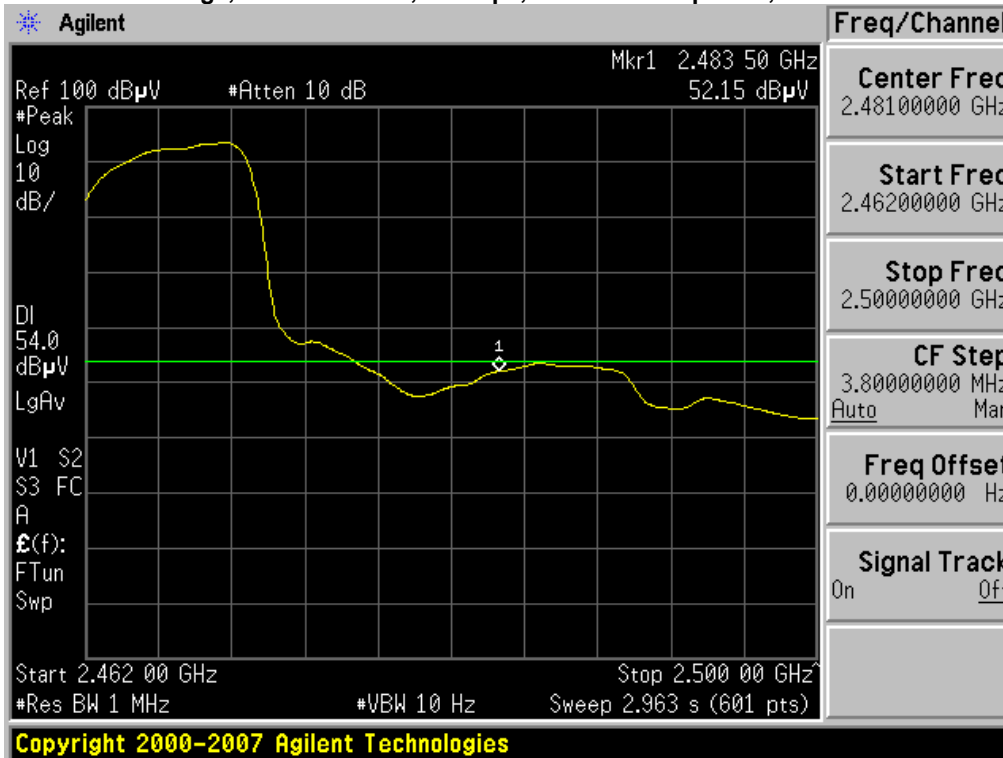






**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Average**

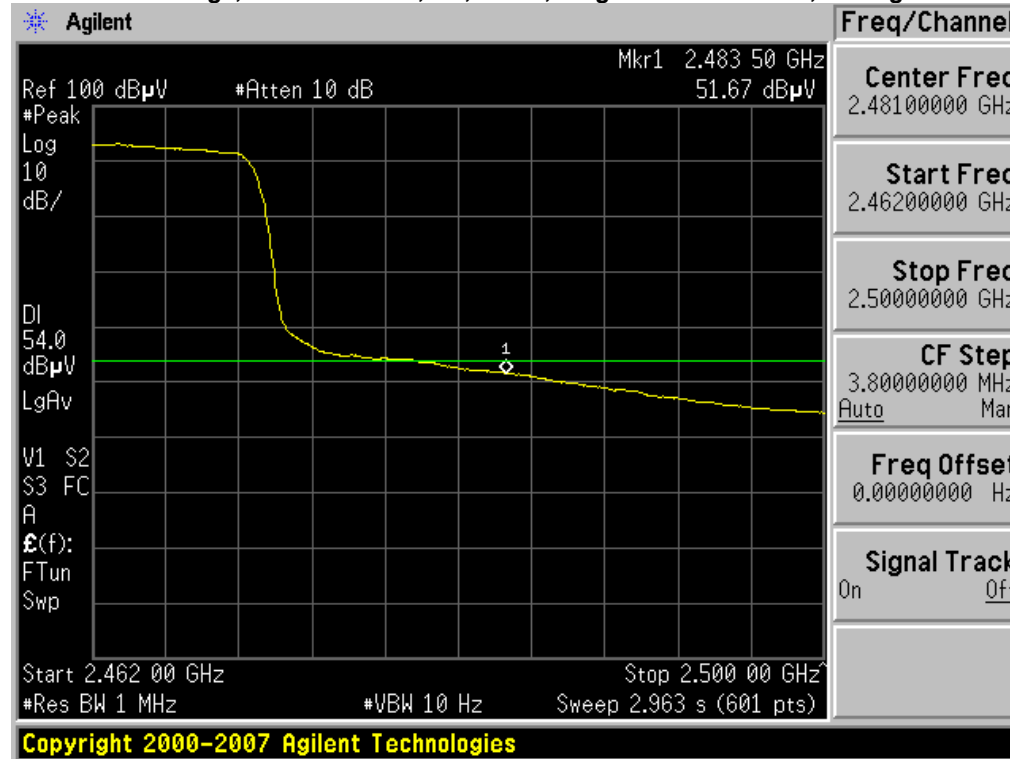


**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Average**

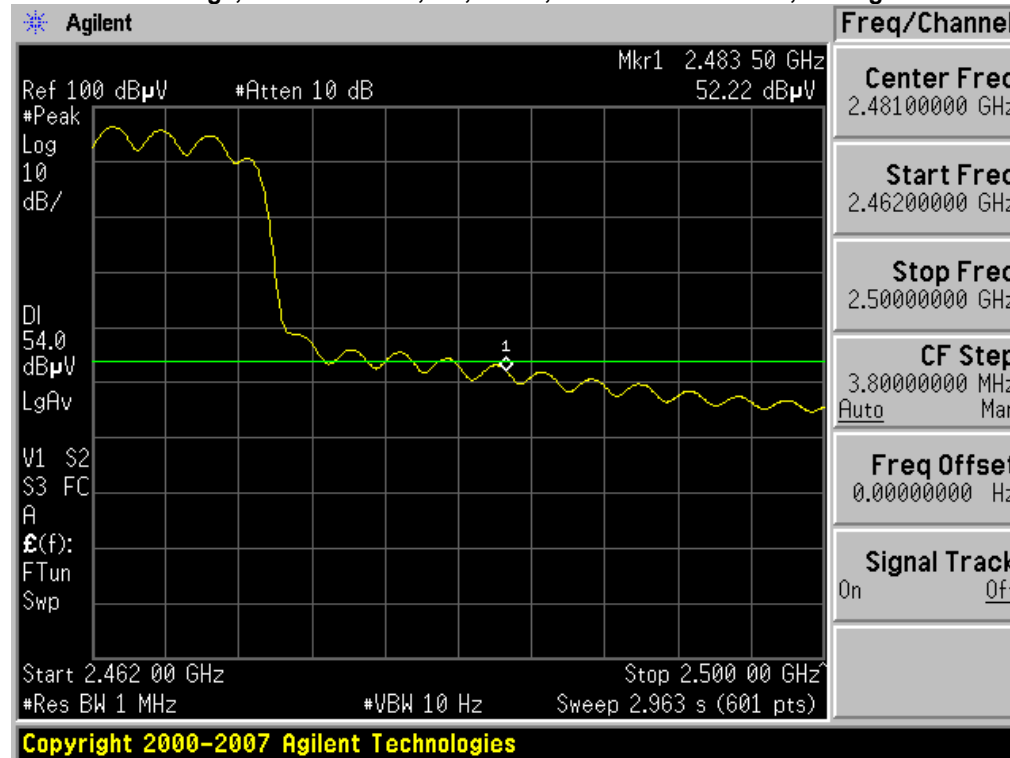




**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**

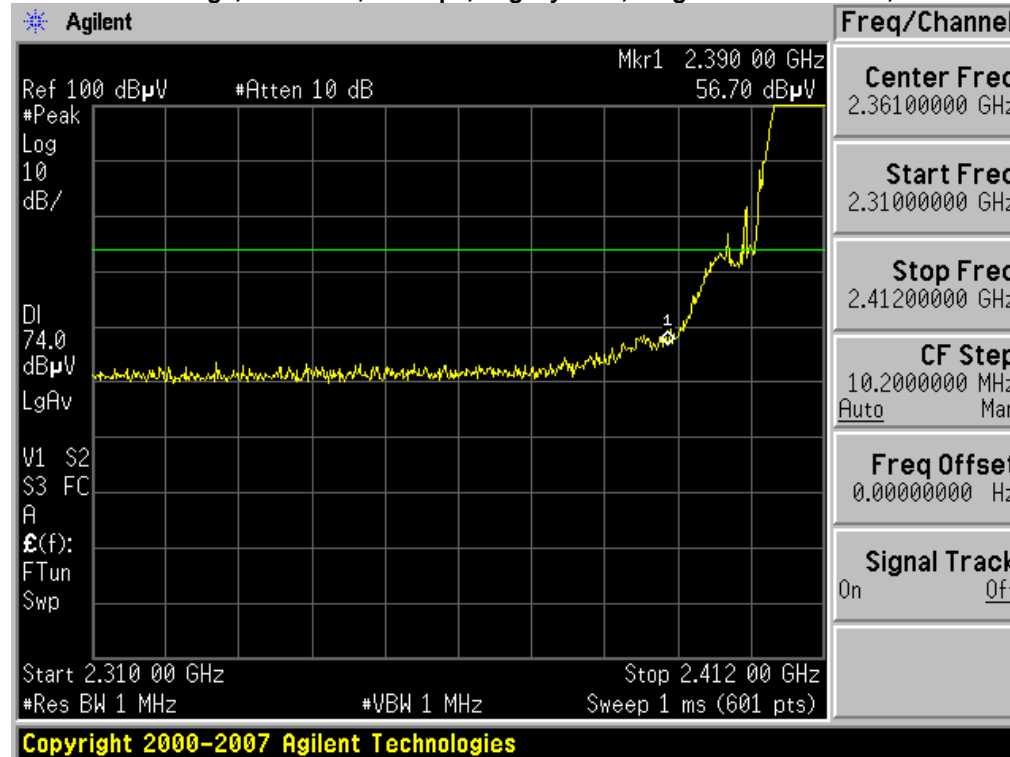


**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

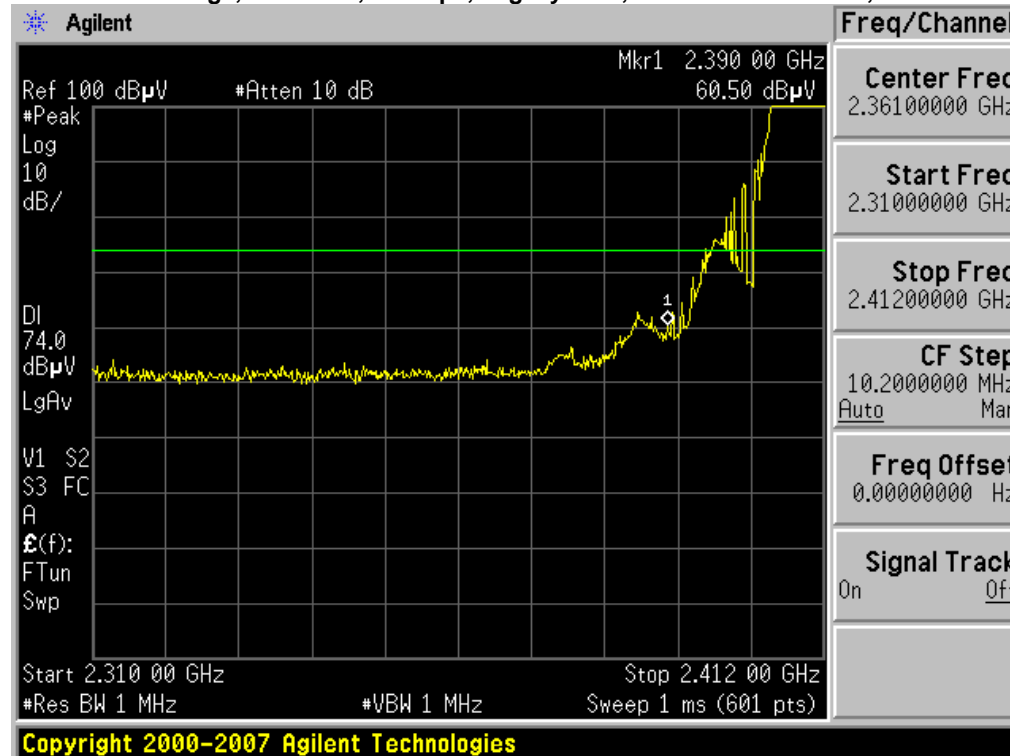



**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Peak**

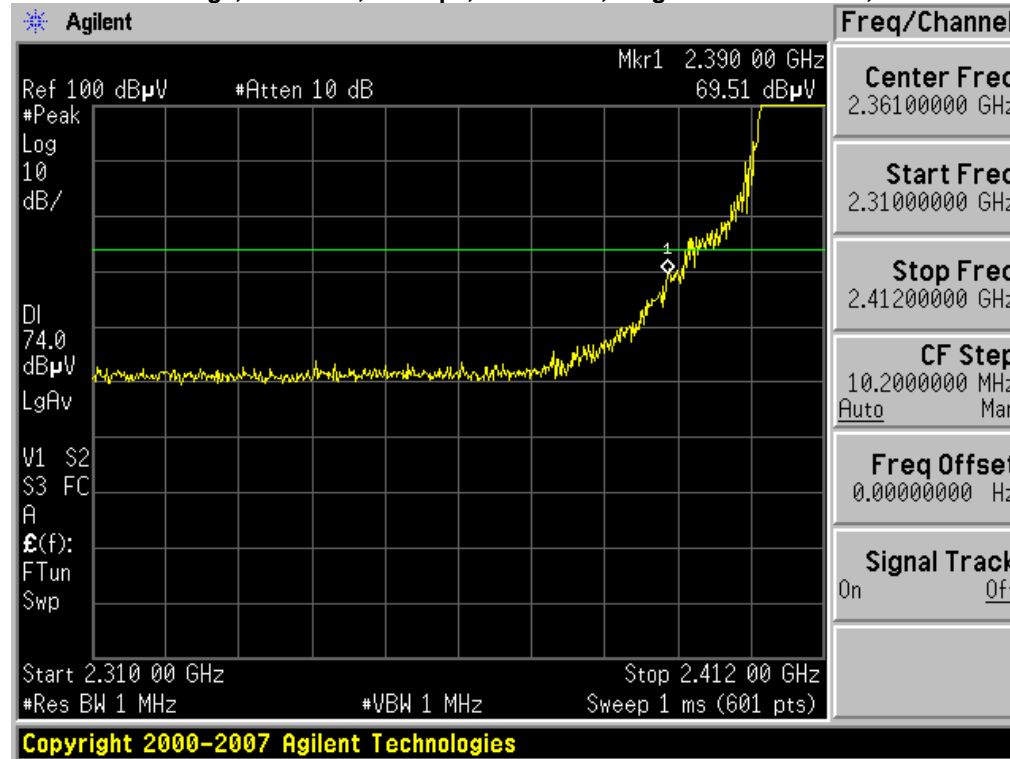


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**






**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

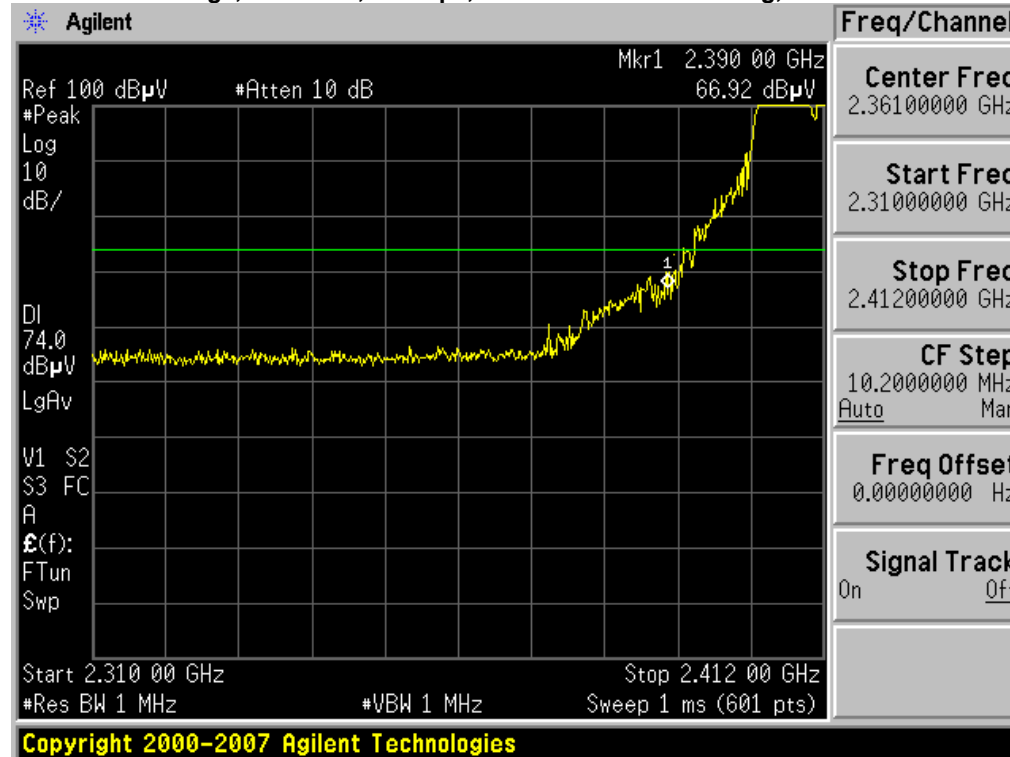

**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**

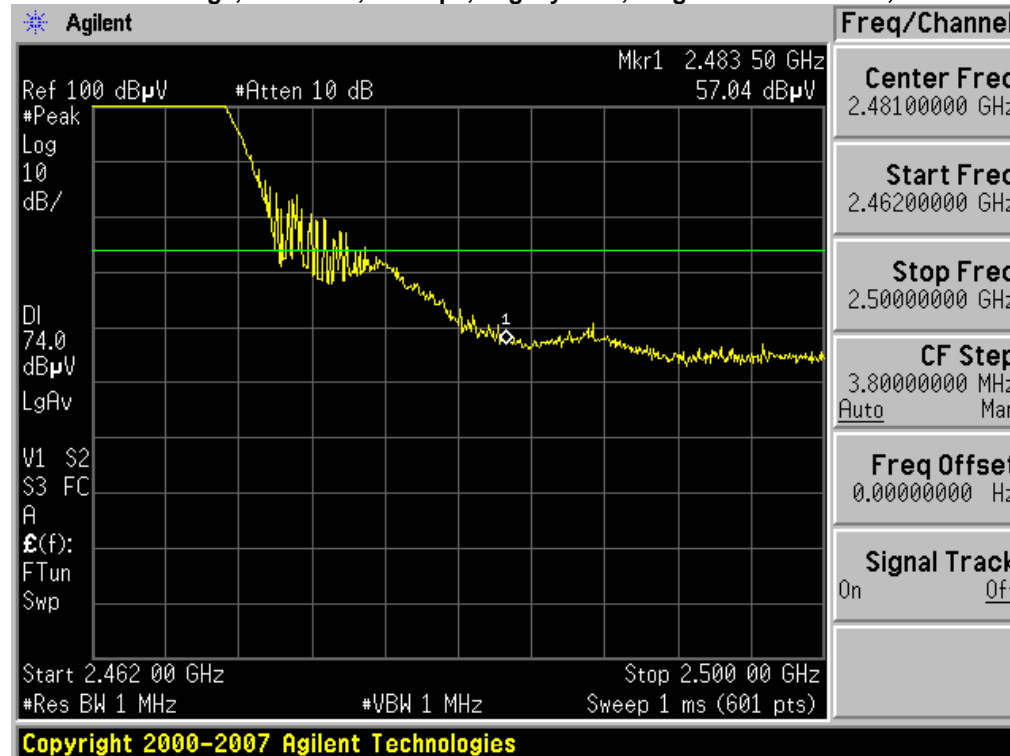




**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**




**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Peak**

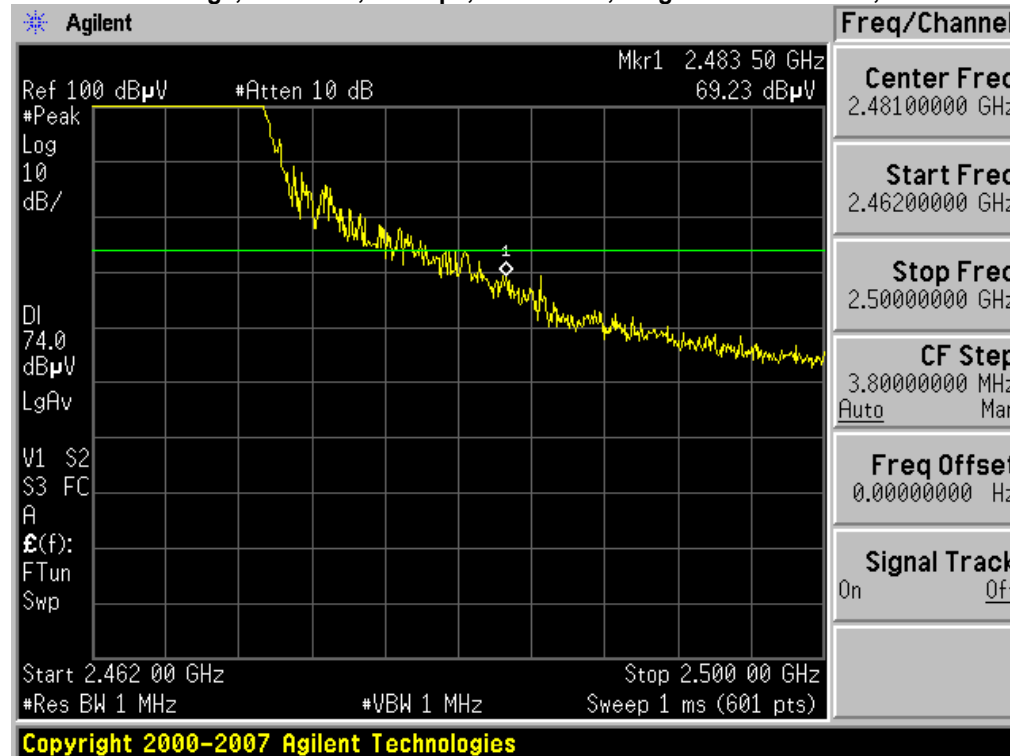




**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**

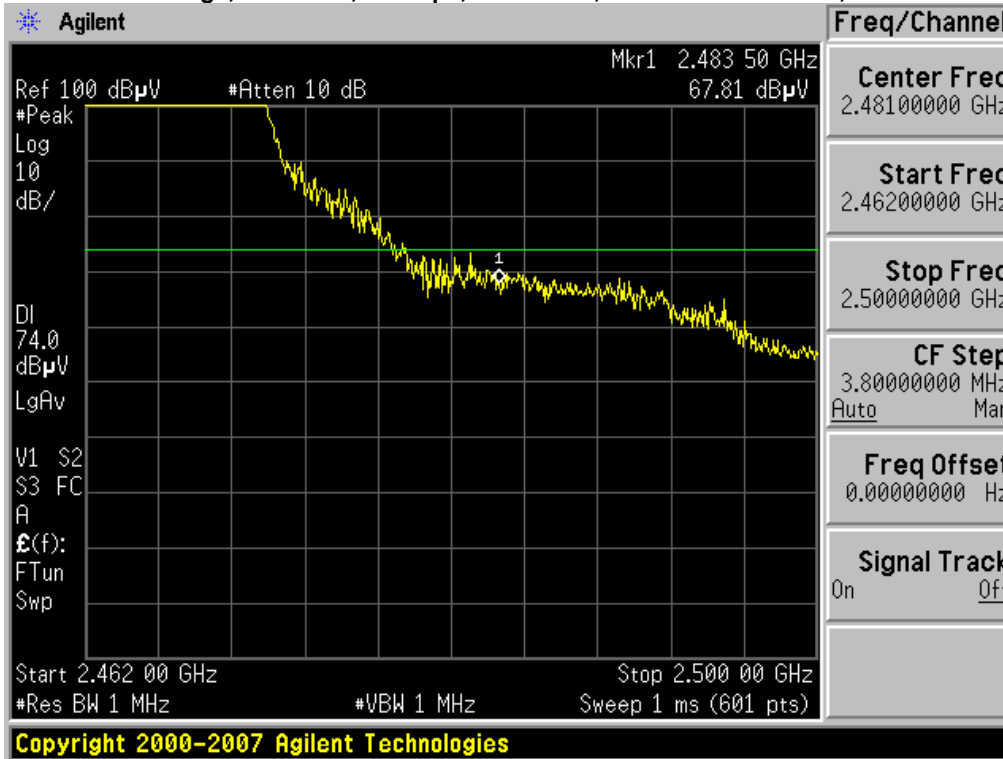


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

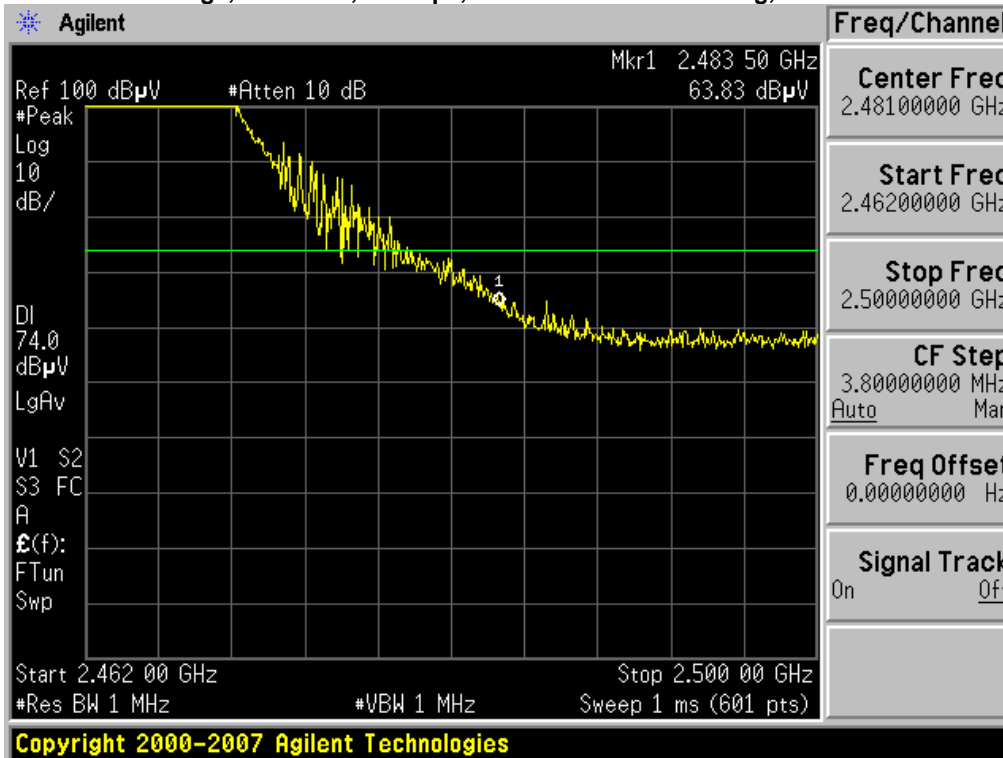




**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

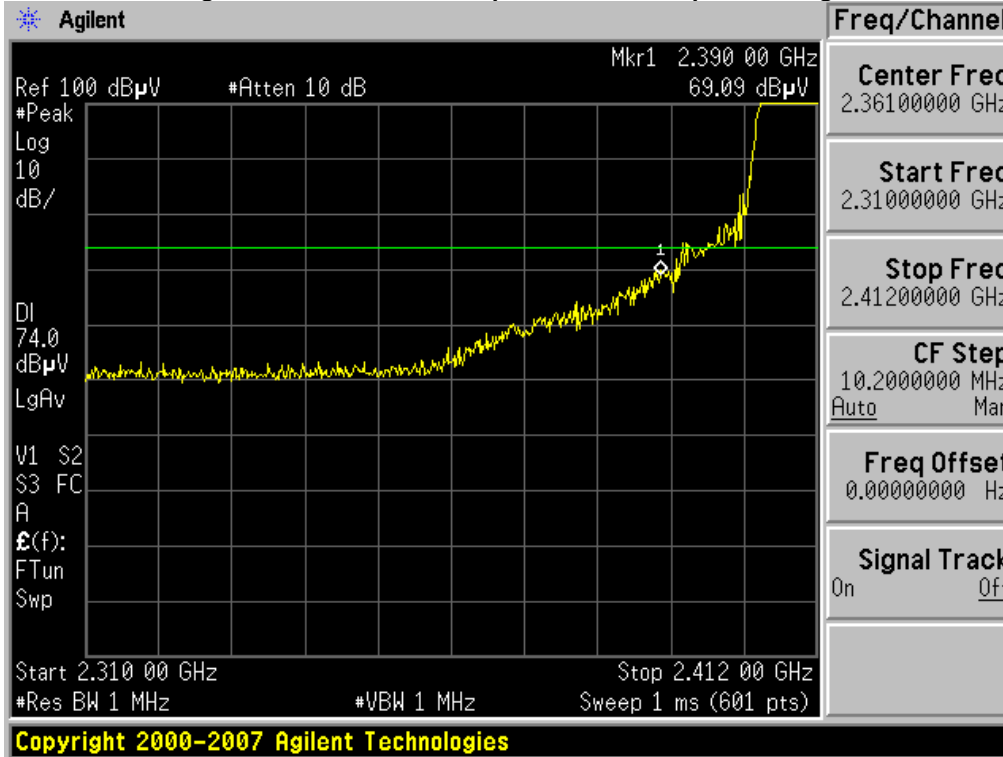


**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

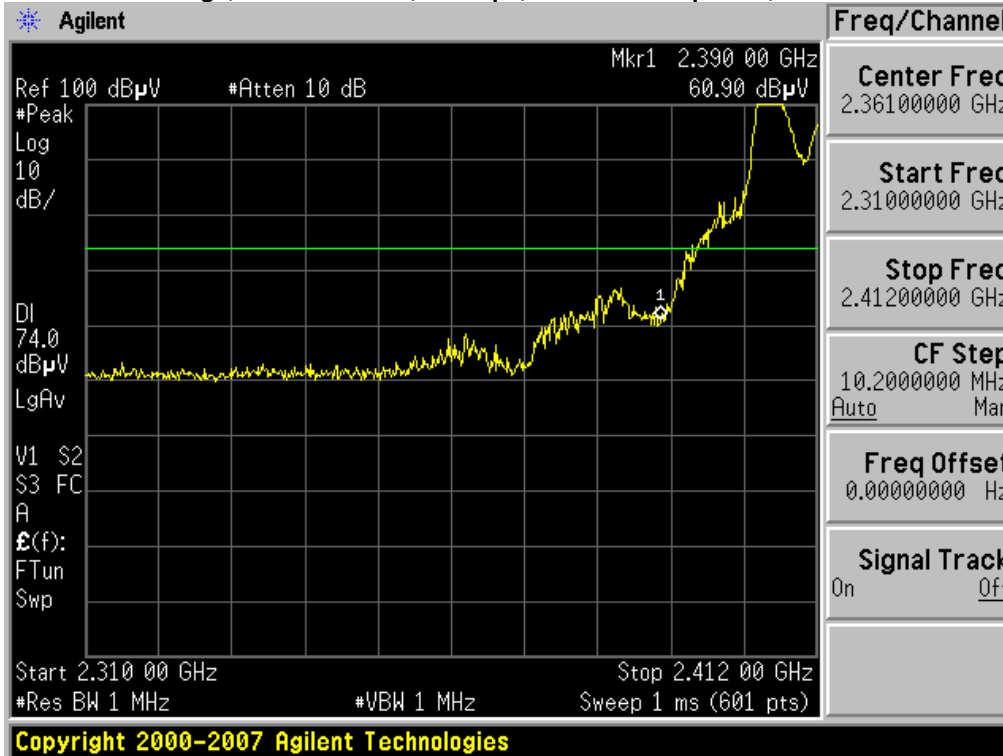




**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Peak**

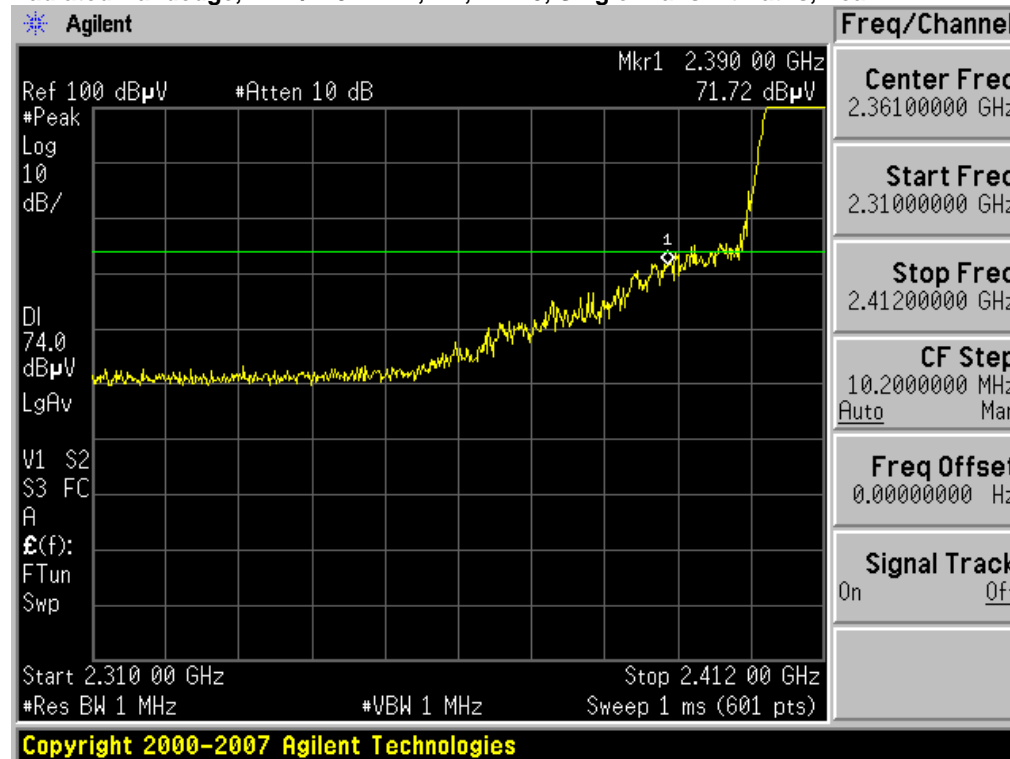


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Peak**

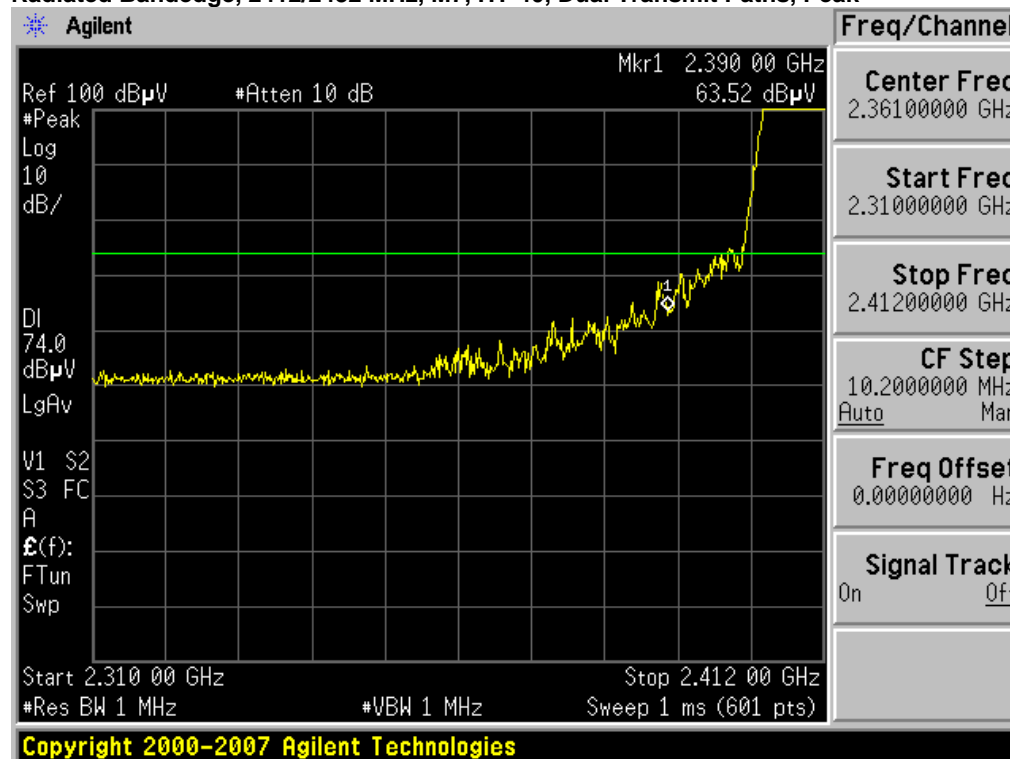






**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

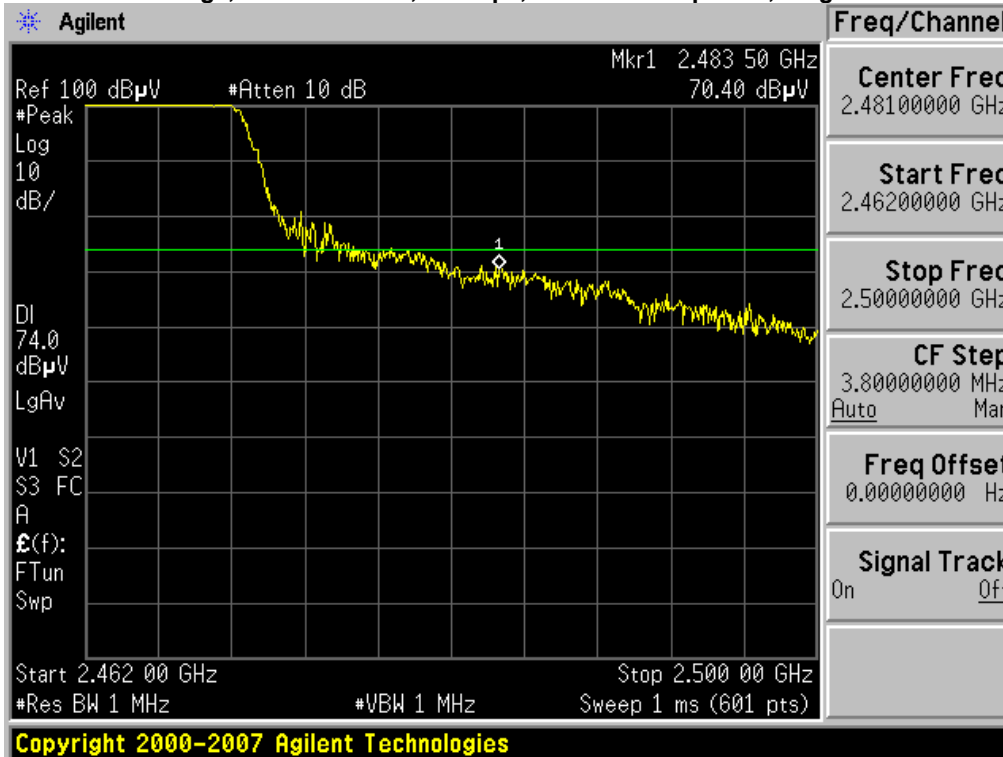


**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

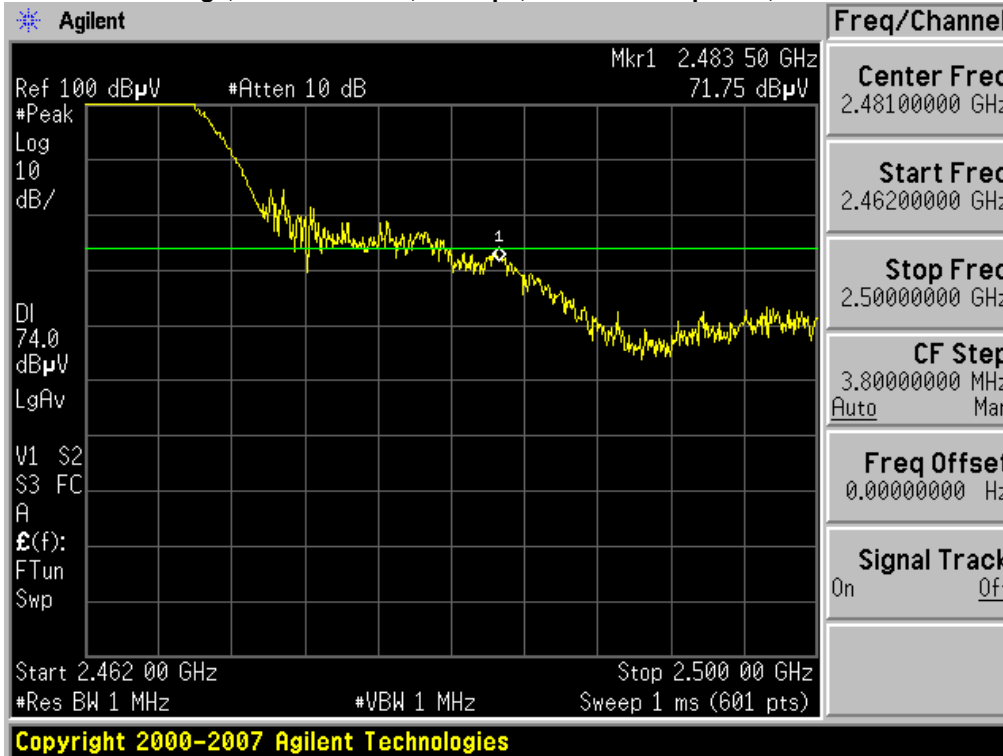




**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Peak**

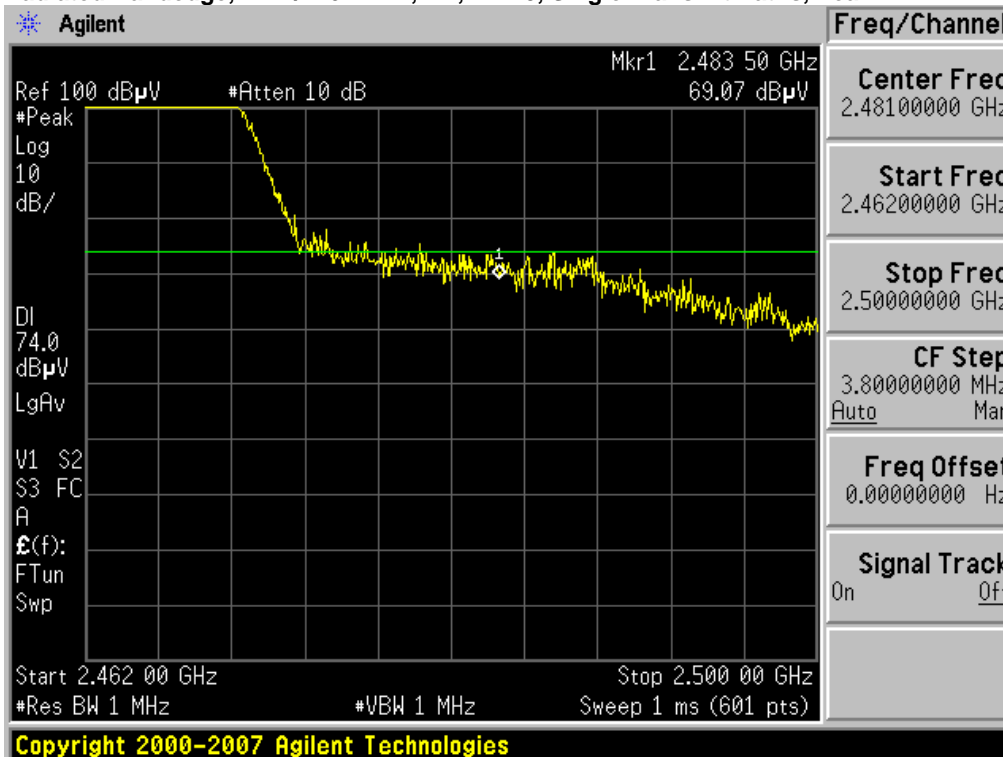

**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Peak**

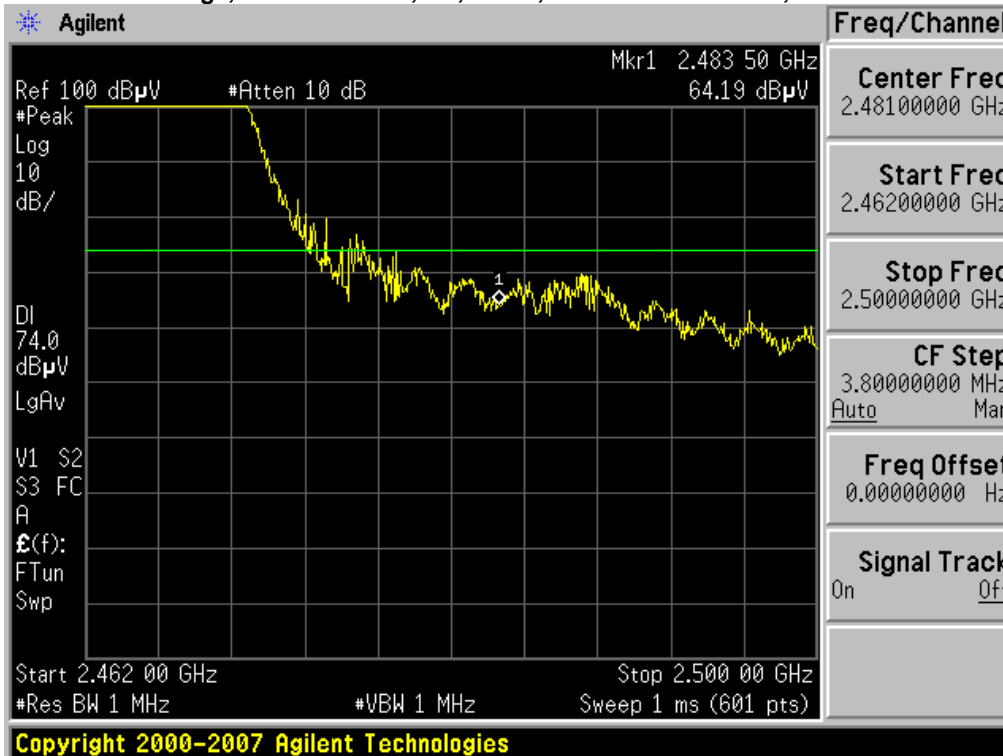




The following data reflects the worst-case emissions for all supported antennas from 3.1-4 dBi.


Frequency (MHz)	Mode	Data Rate (Mbps)	Target Total Transmit Power Level (dBm)	Radiated Band Edge Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	20	48.2	54	5.8
2412	Legacy CCK, Dual Tx Path	11	23	50.8	54	3.2
2412	Non HT-20, Single Tx Path	54	17	50.2	54	3.8
2412	Non HT-20, Dual Tx Path	54	20	50.2	54	3.8
2412	Non HT-20 Beam Forming	54	18	53.8	54	0.2
2462	Legacy CCK, Single Tx Path	11	20	48.9	54	5.1
2462	Legacy CCK, Dual Tx Path	11	23	50.5	54	3.5
2462	Non HT-20, Single Tx Path	54	17	50.7	54	3.3
2462	Non HT-20, Dual Tx Path	54	19	52.0	54	2.0
2462	Non HT-20 Beam Forming	54	16	51.4	54	2.6
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	14	53.9	54	0.1
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	15	47.7	54	6.3
2412/2432	HT-40, Single Tx Path	M7	16	53.6	54	0.4
2412/2432	HT-40, Dual Tx Path	M7	17	52.3	54	1.7
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	14	53.4	54	0.6
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	15	52.6	54	1.4
2442/2462	HT-40, Single Tx Path	M7	16	53.7	54	0.3
2442/2462	HT-40, Dual Tx Path	M7	17	53.8	54	0.2



**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

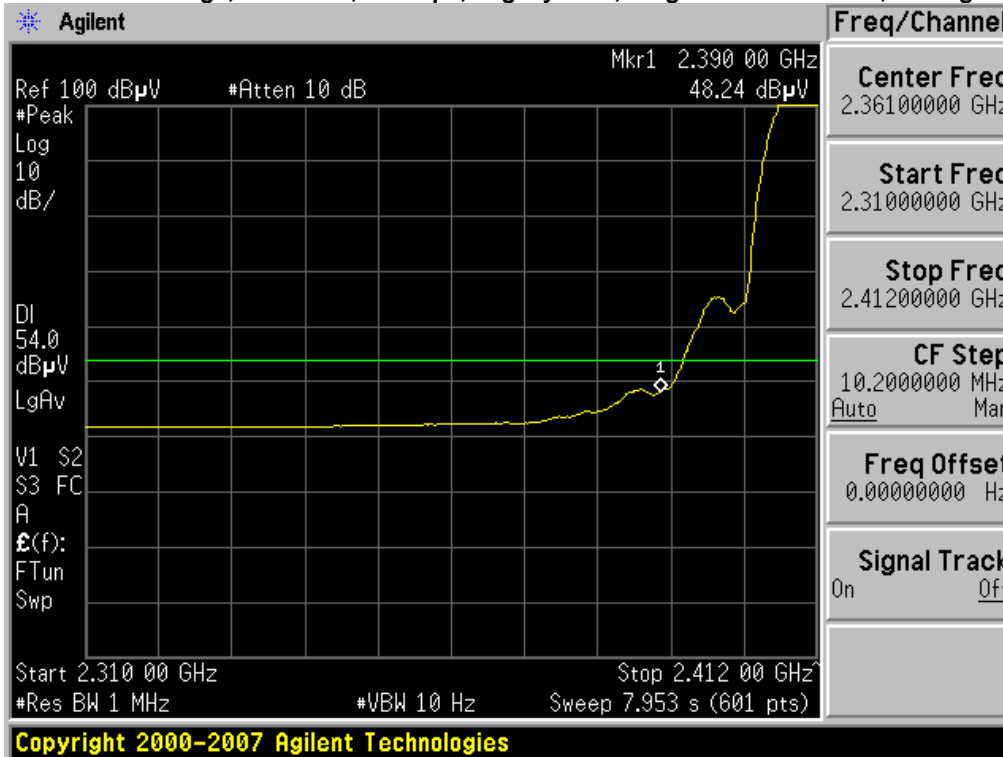


**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

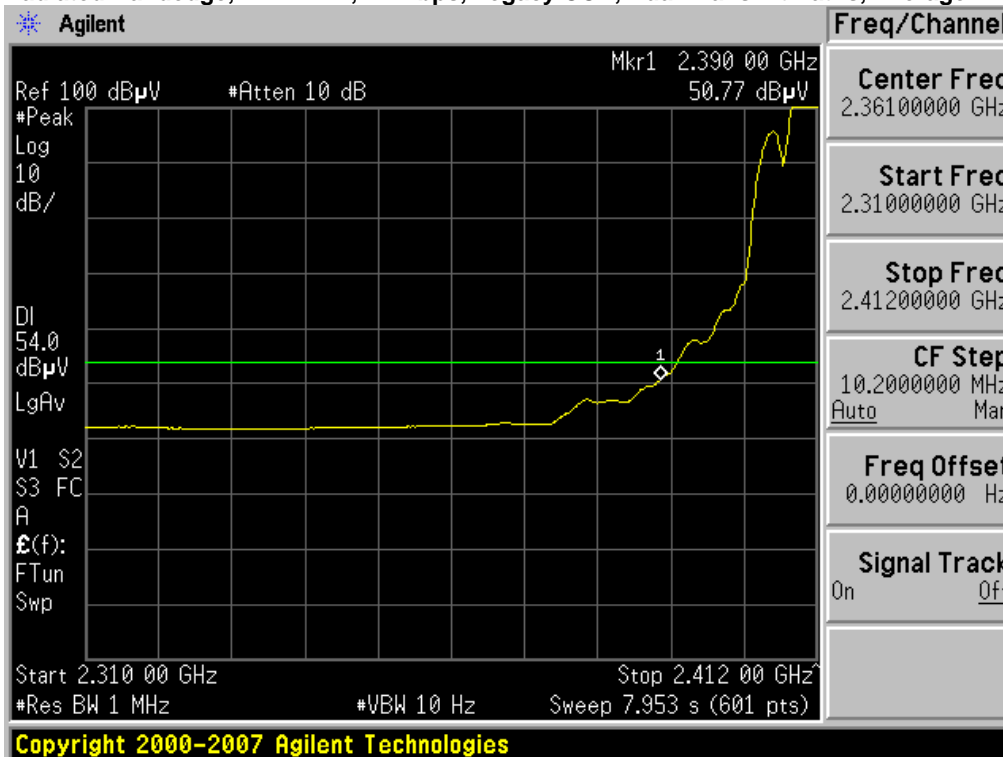




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Average**

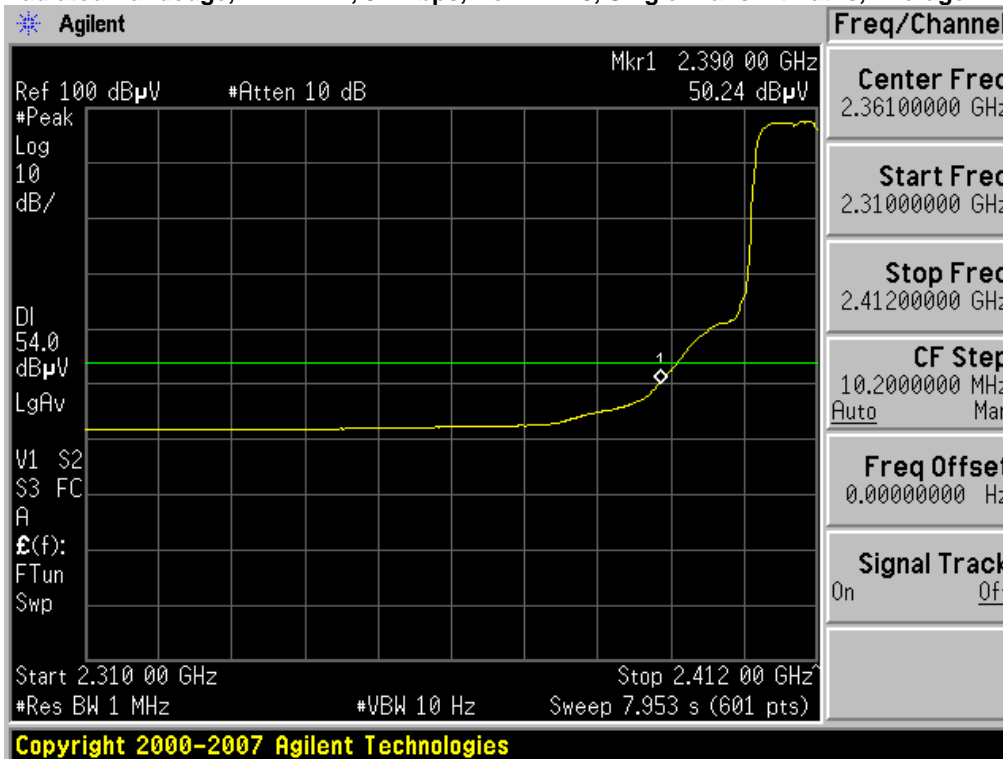


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average**

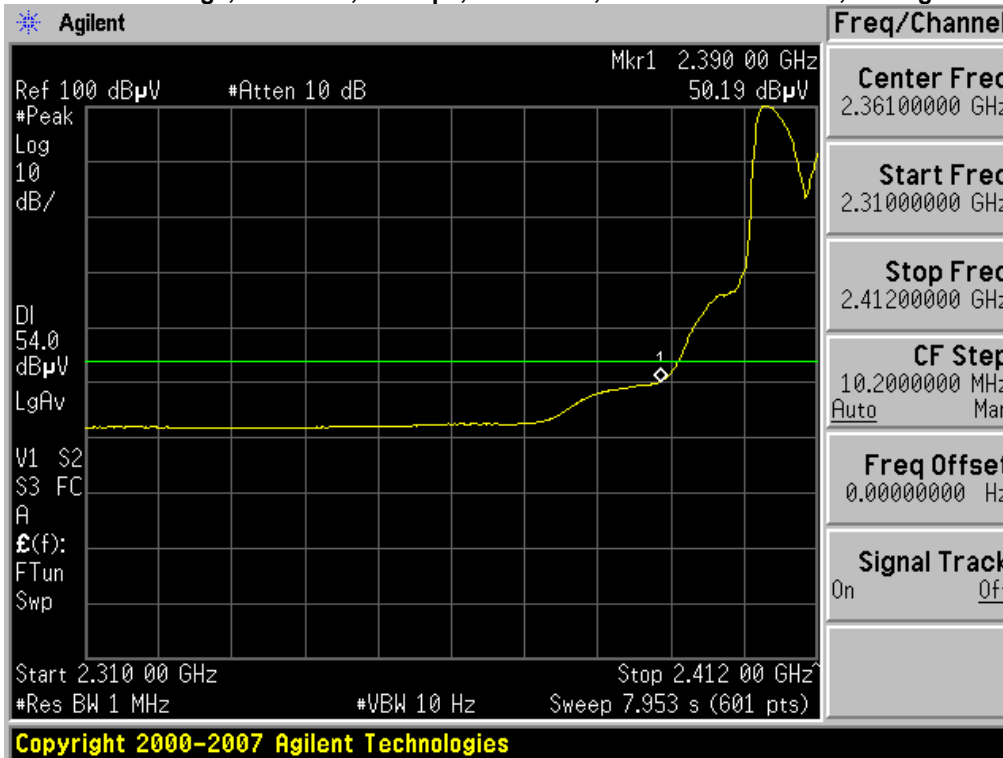




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average**

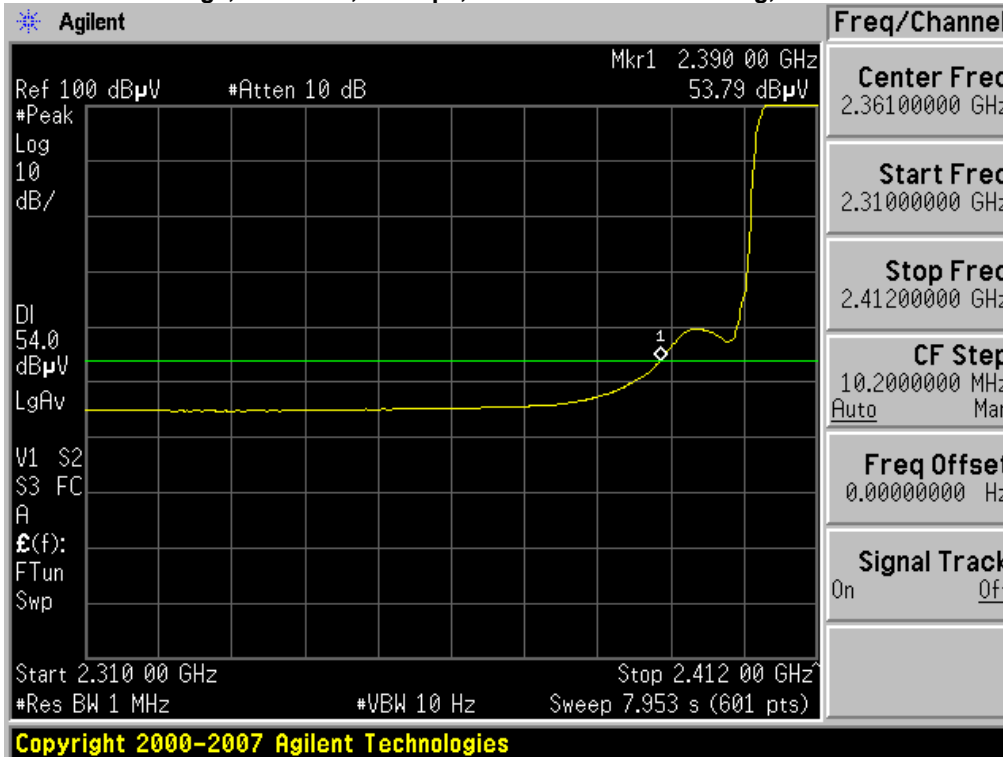


**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

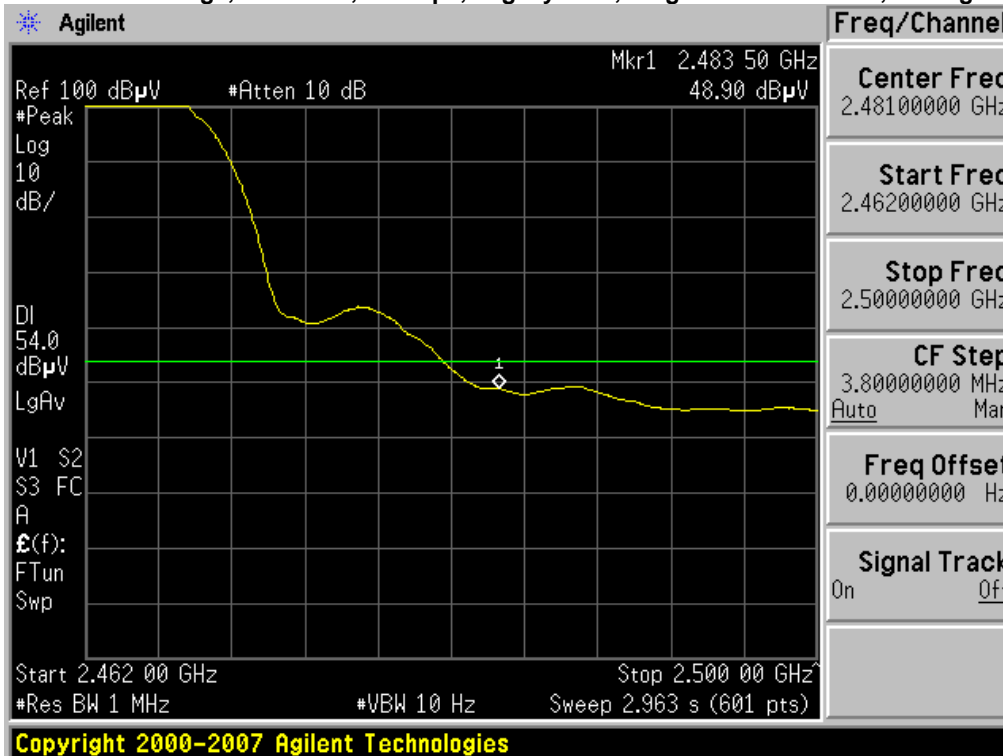



**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

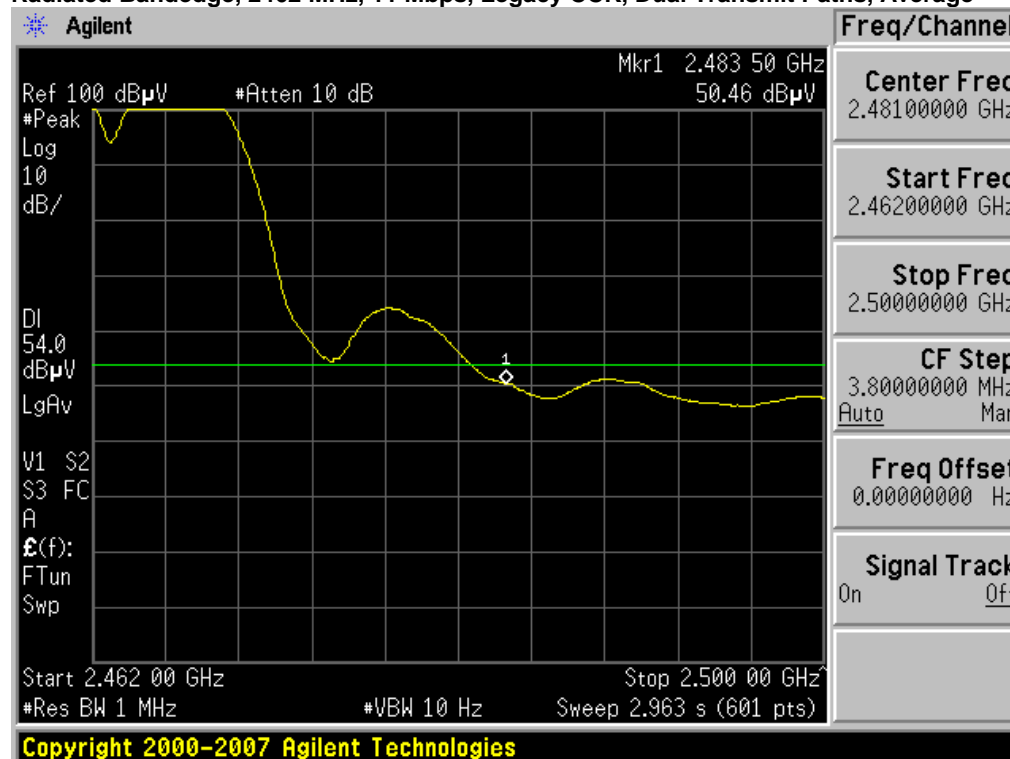


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Average**






**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average**

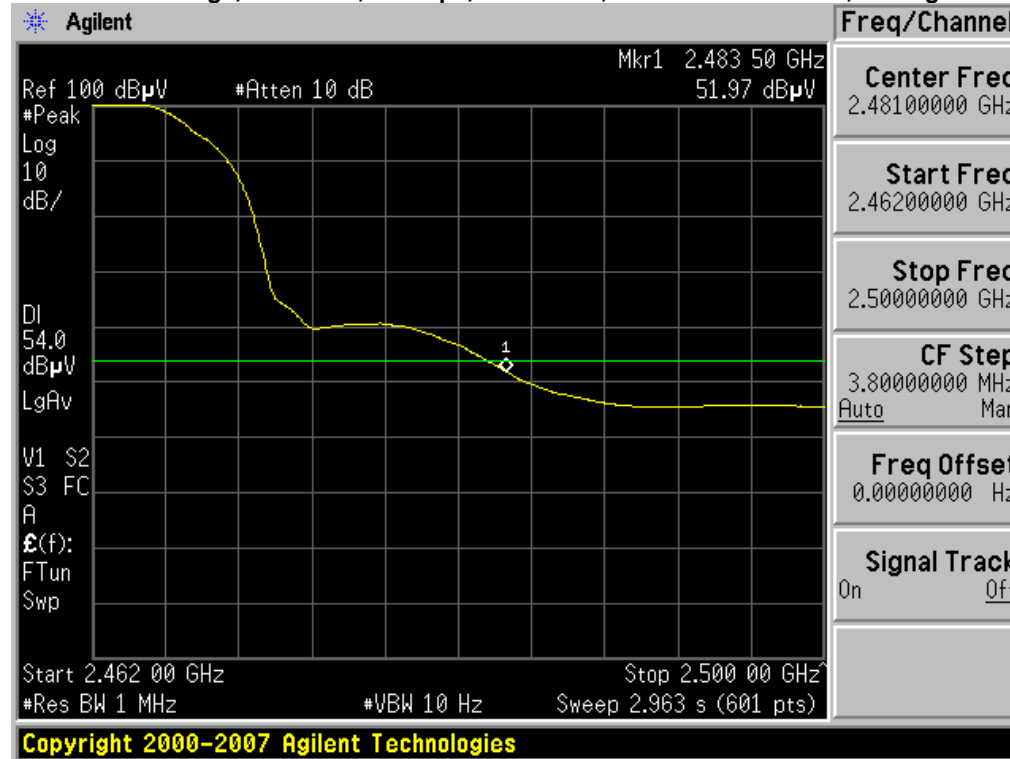

**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average**

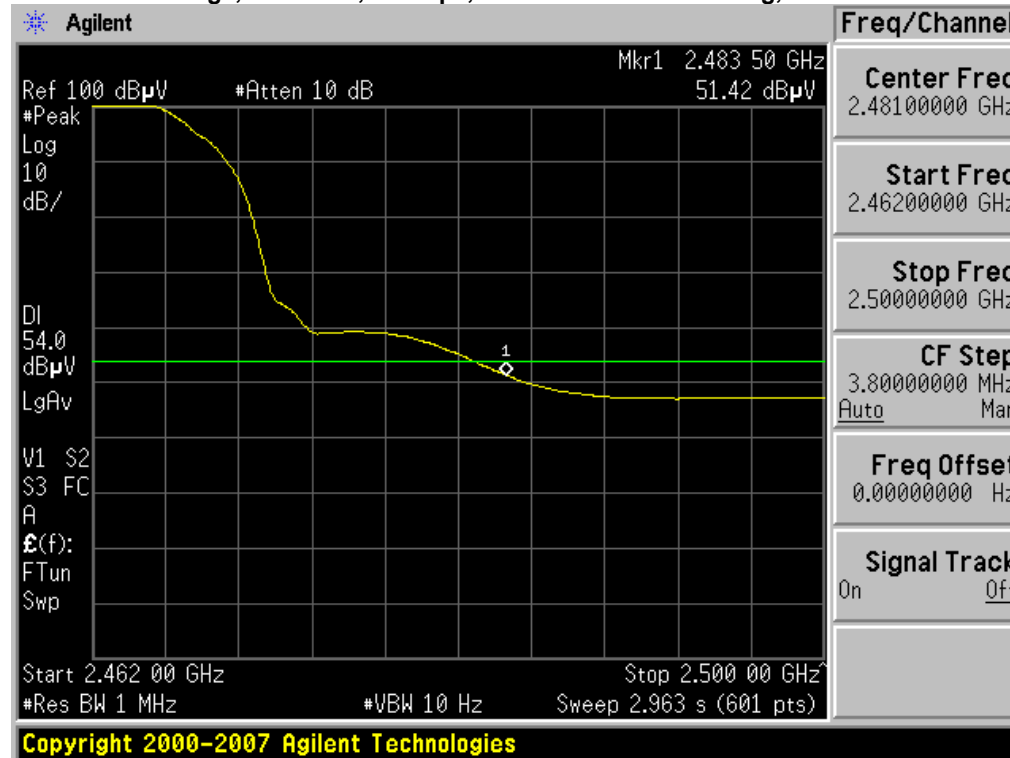






Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average




Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average

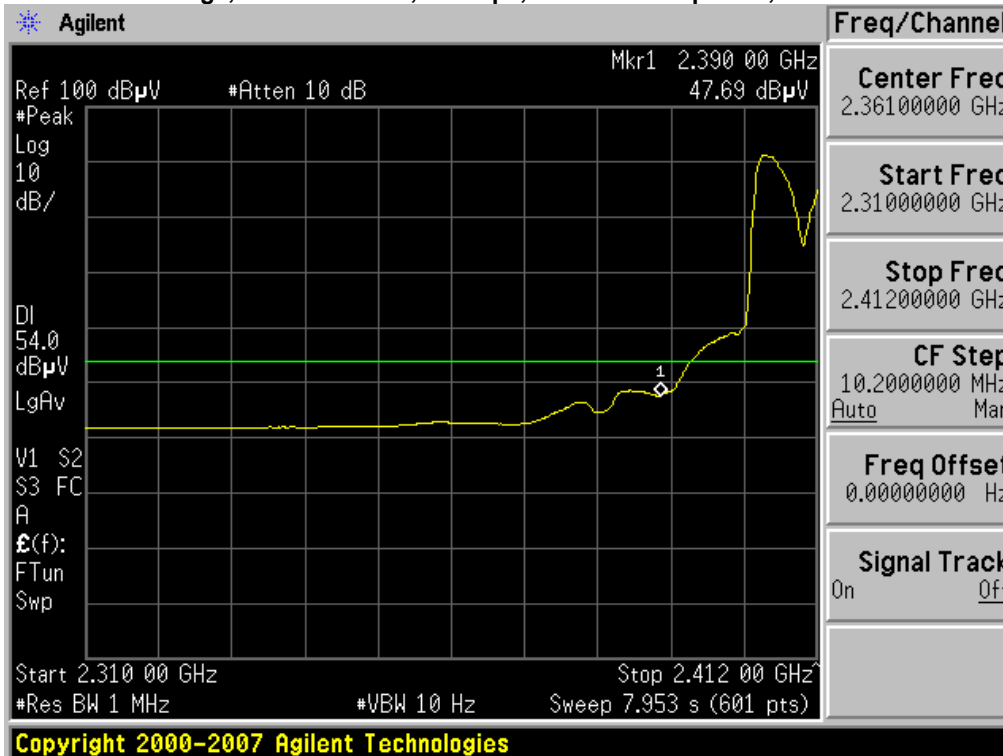




**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Average**

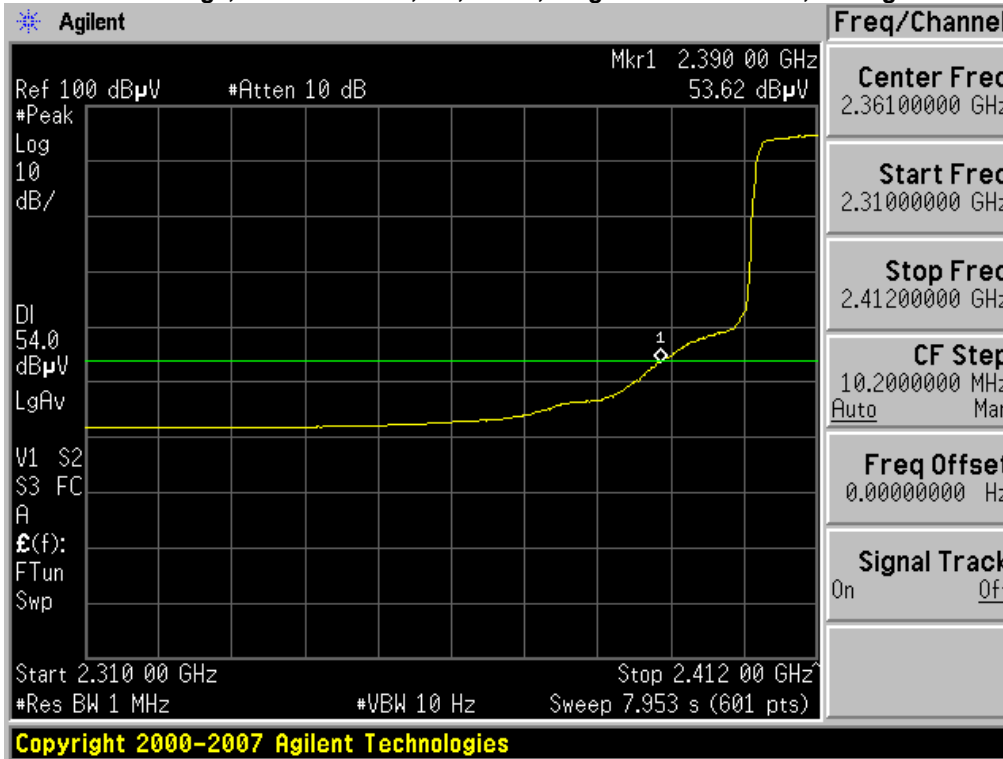


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Average**

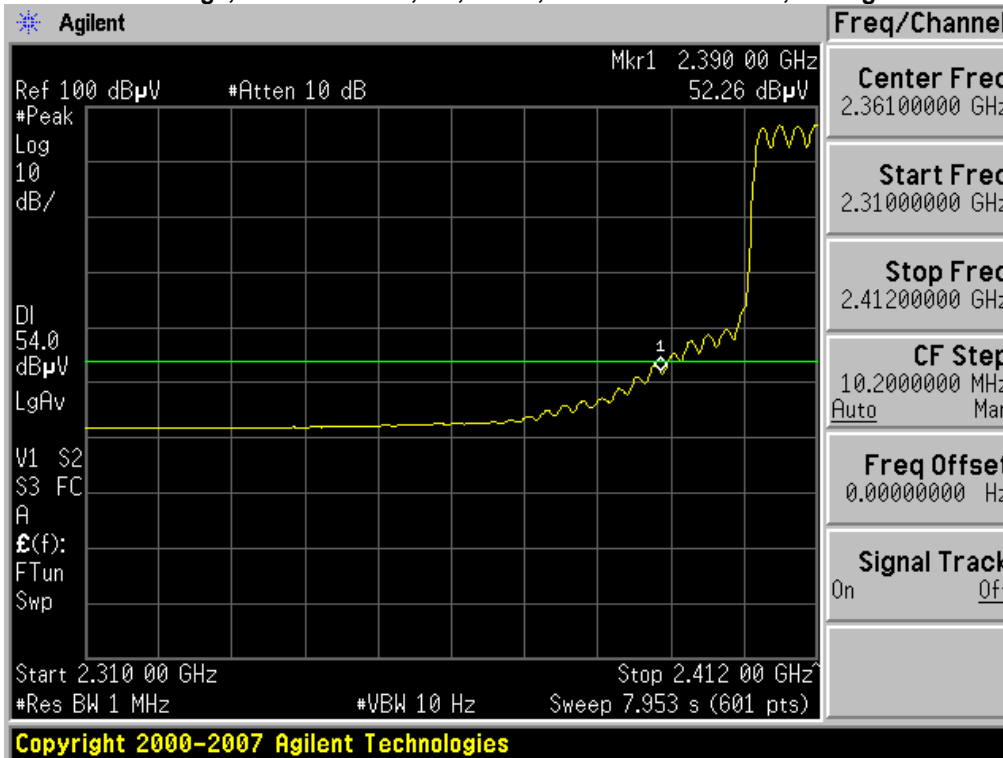




**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average**

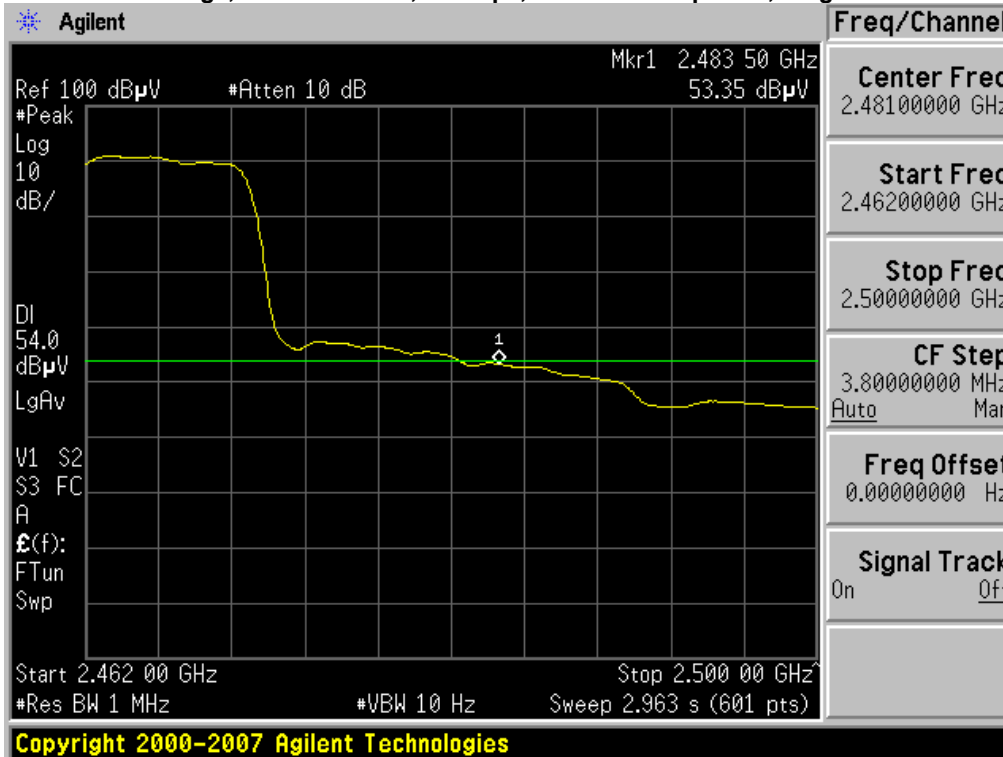


**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

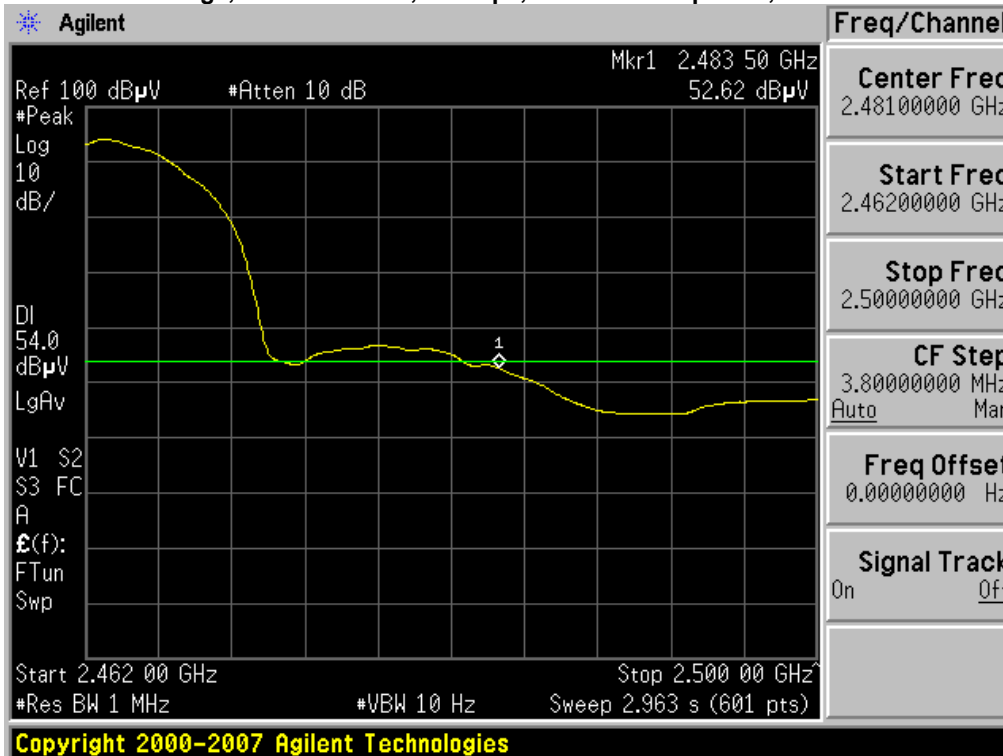




**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Average**

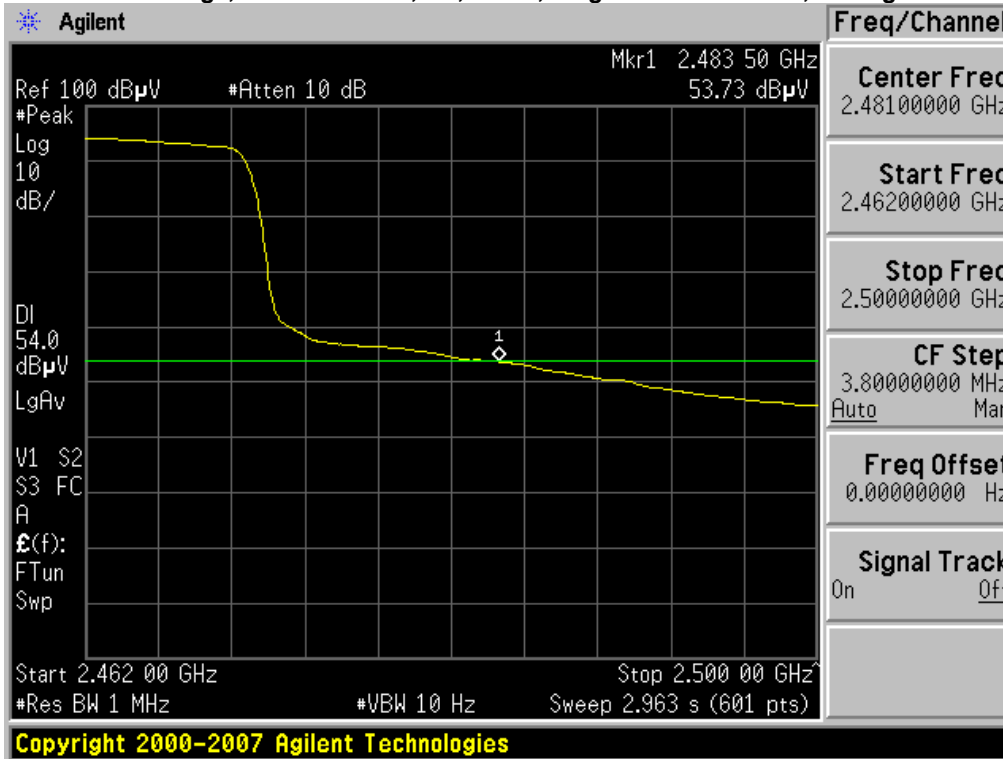


**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Average**

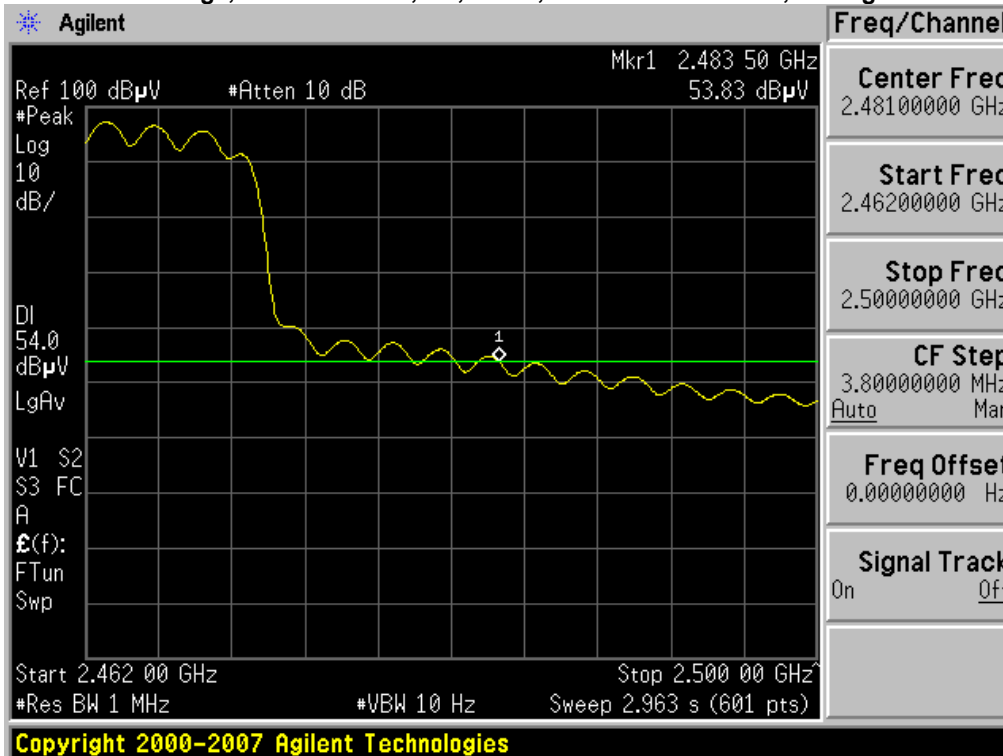




**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**

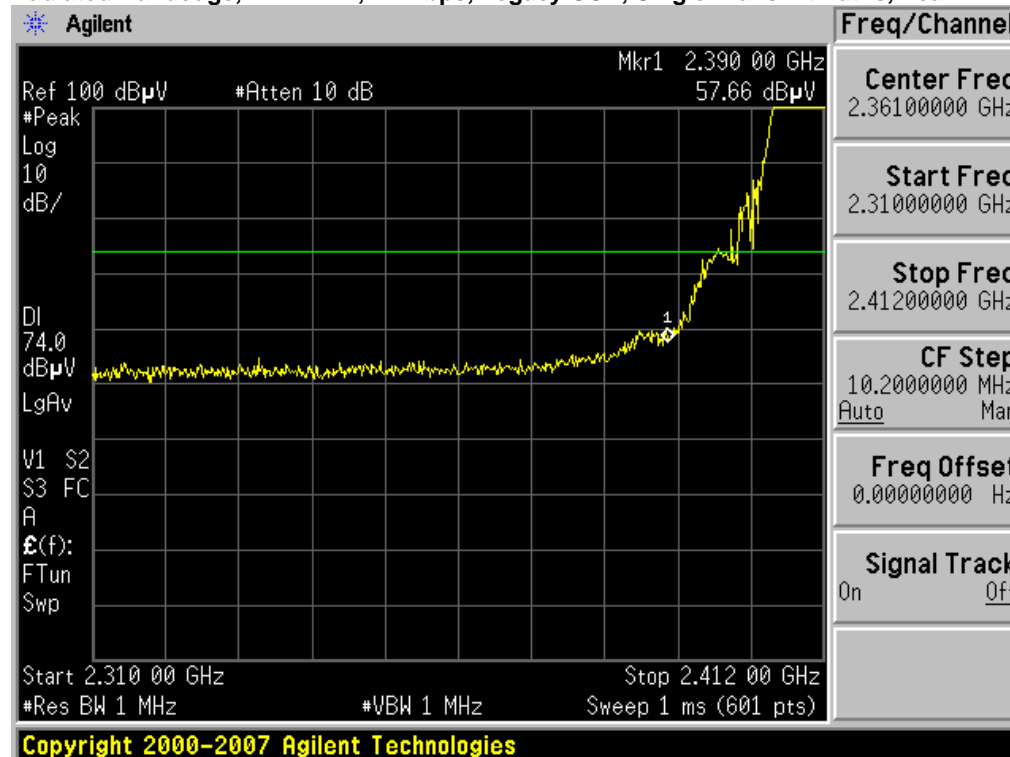


**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

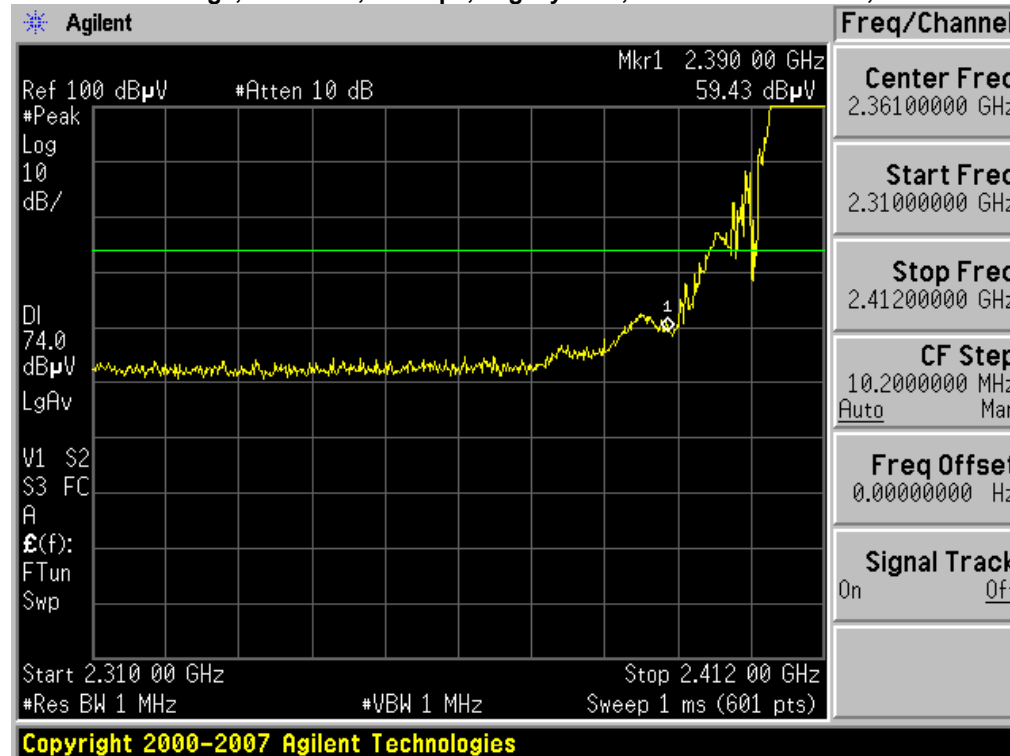




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Peak**

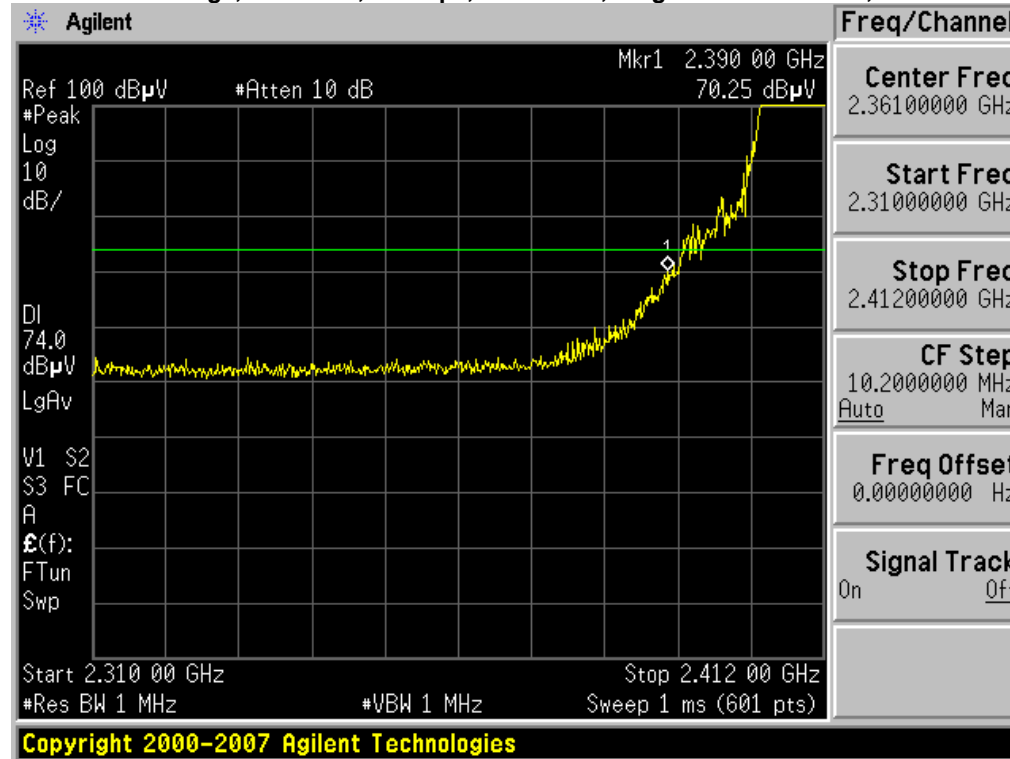


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**

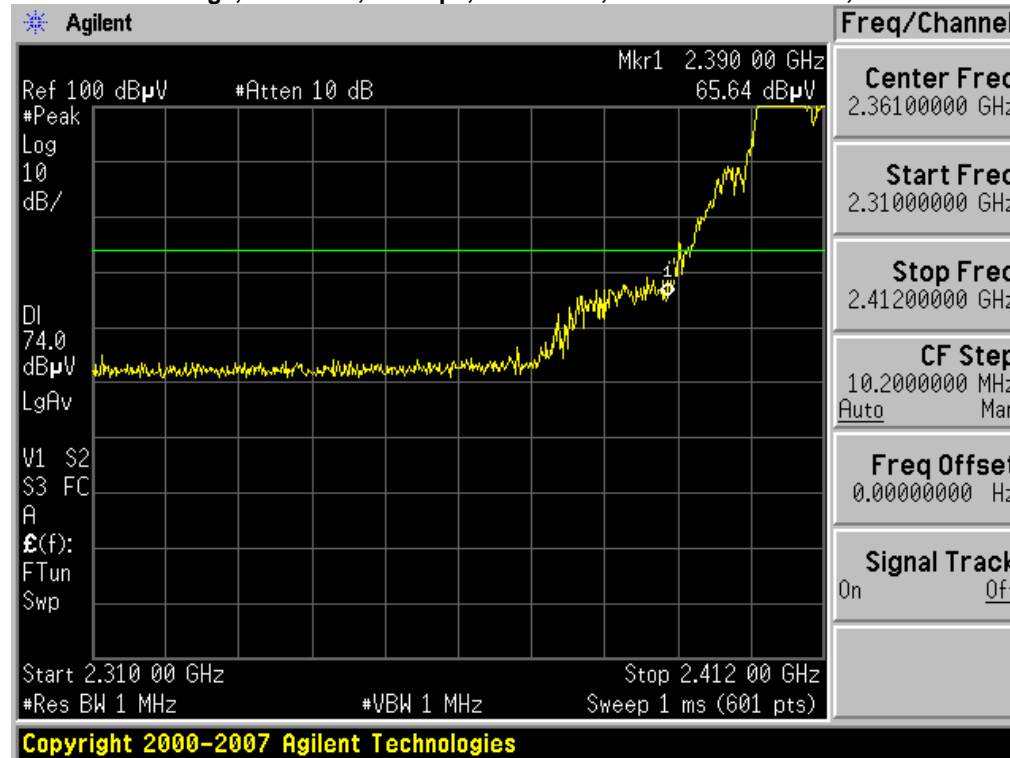




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

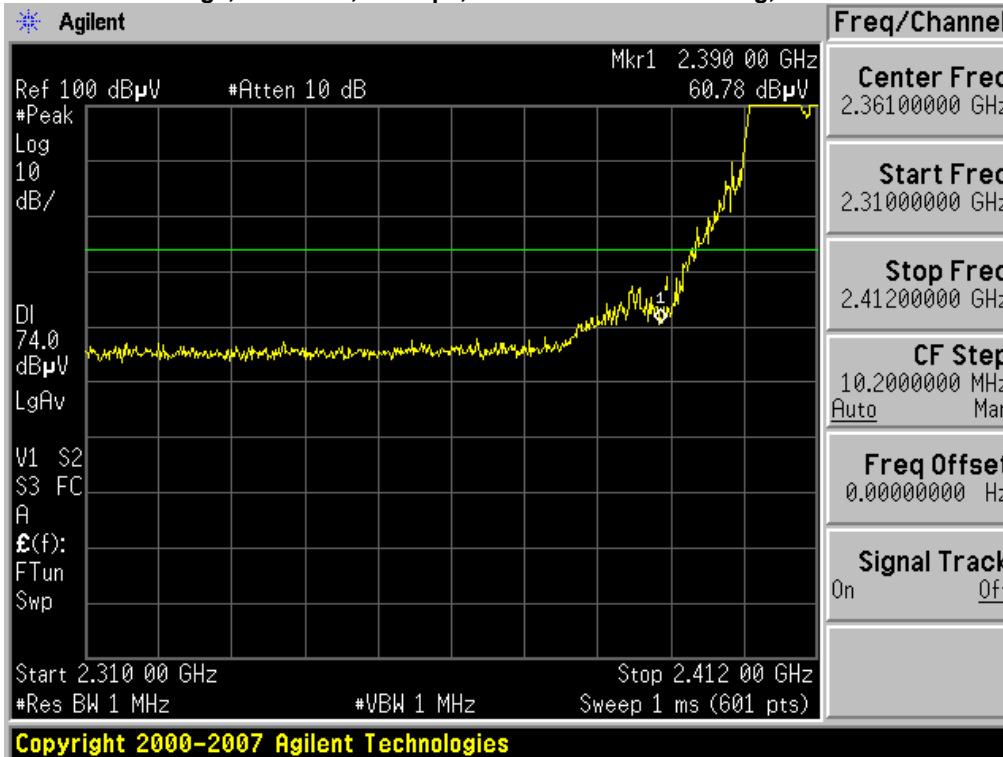

**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**

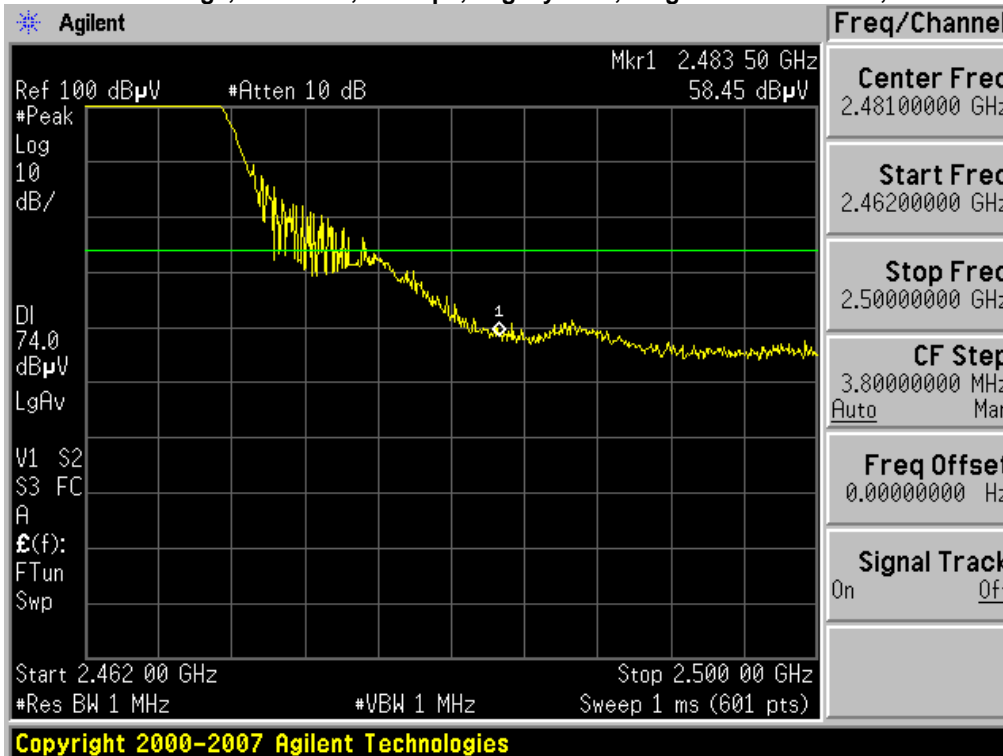




**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**




**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Peak**

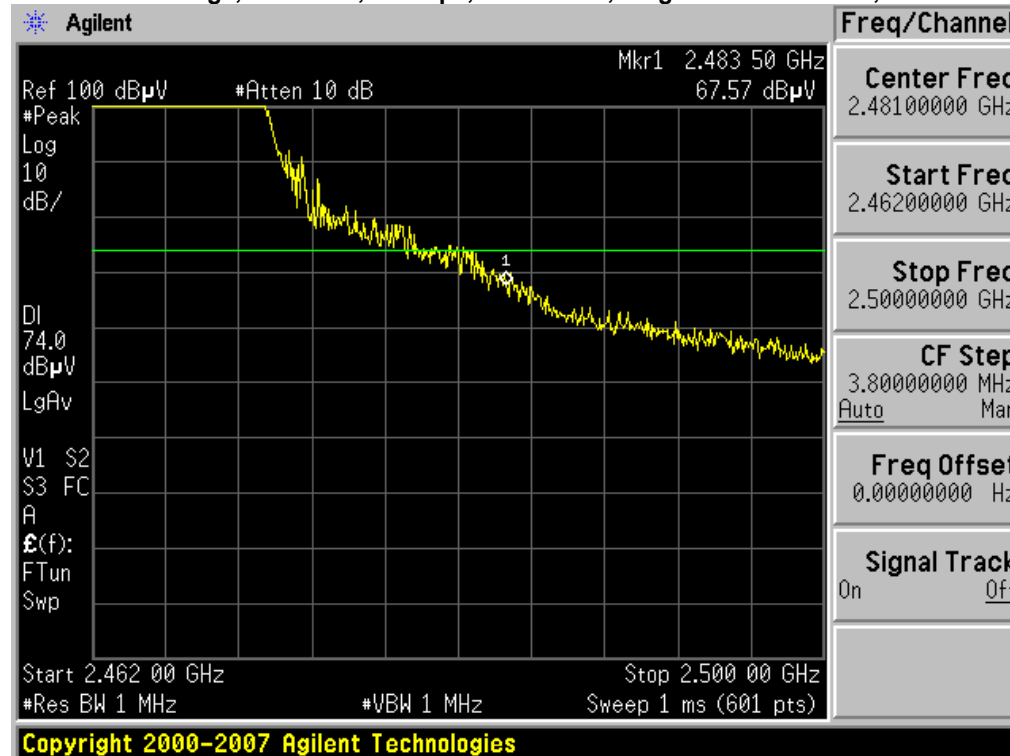






**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**

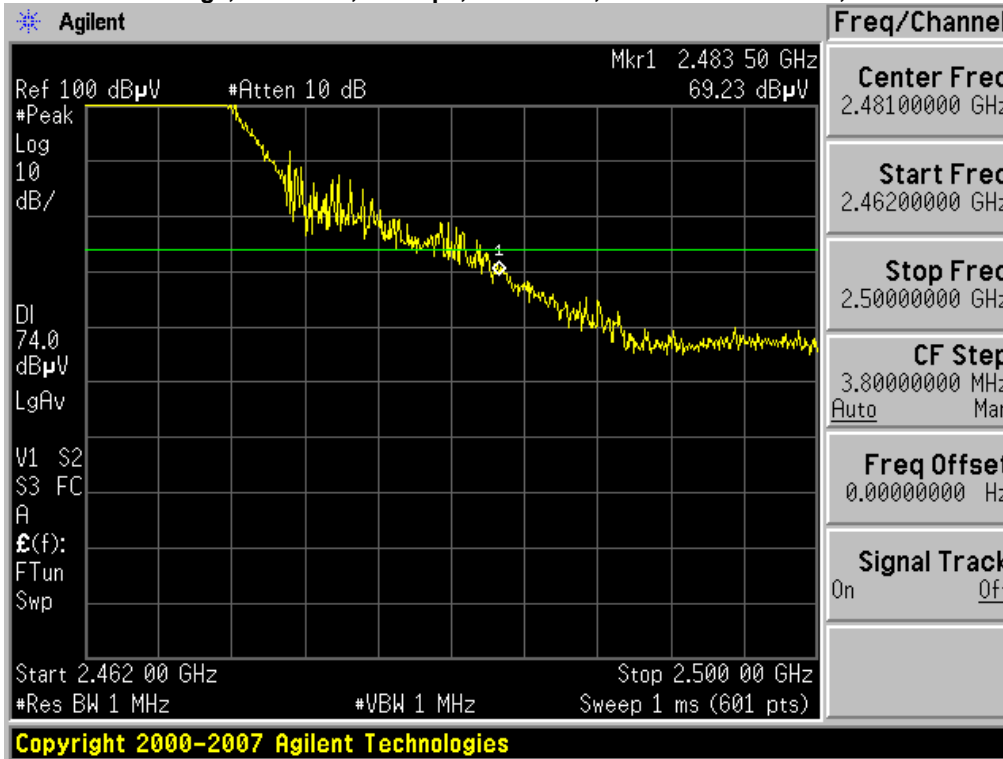


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

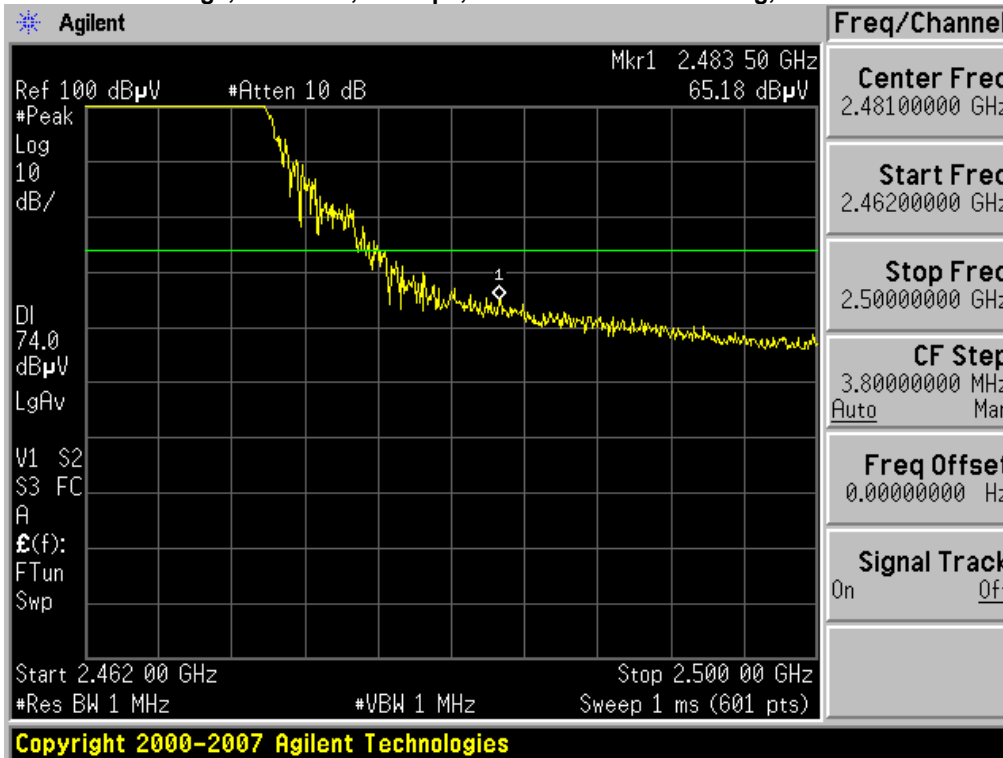




**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

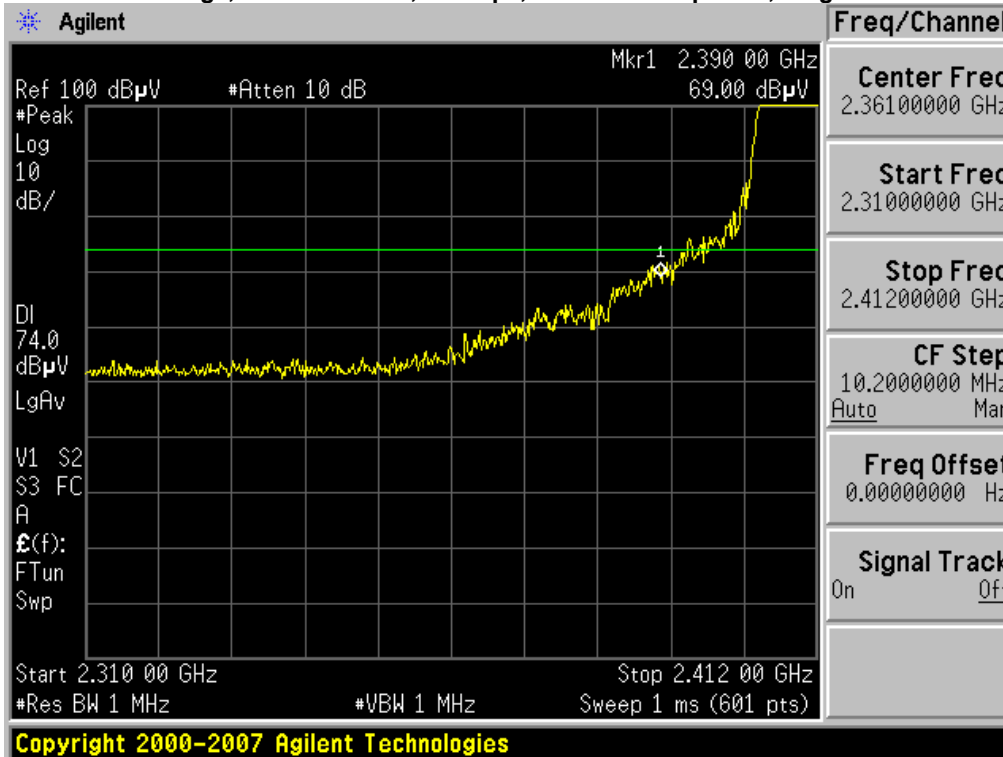


**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

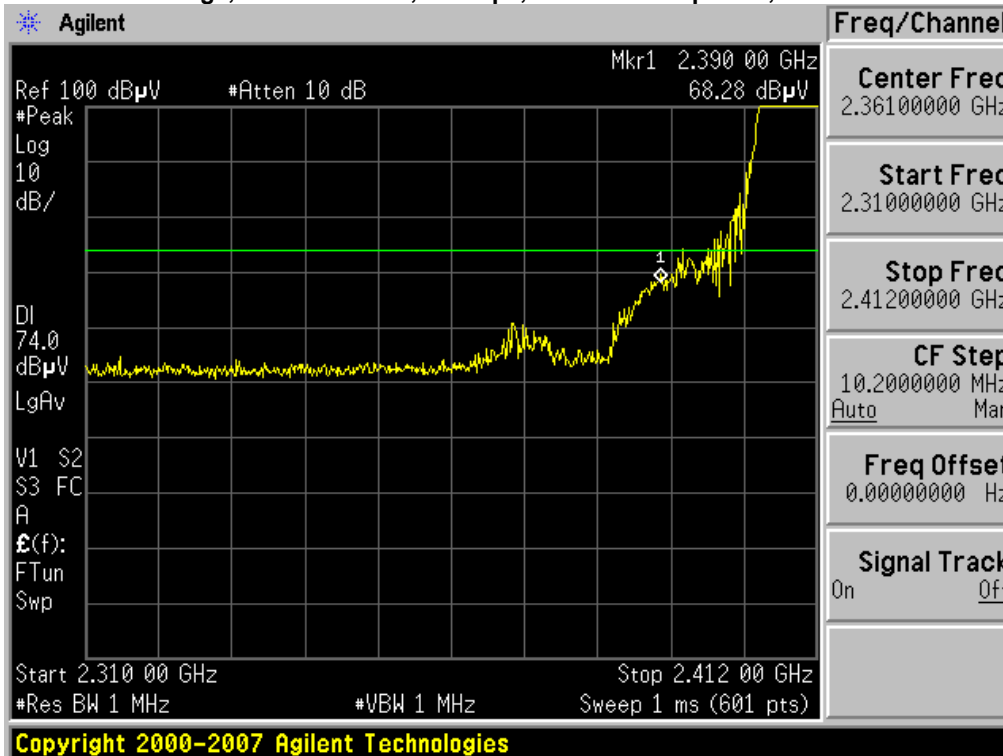




**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Peak**

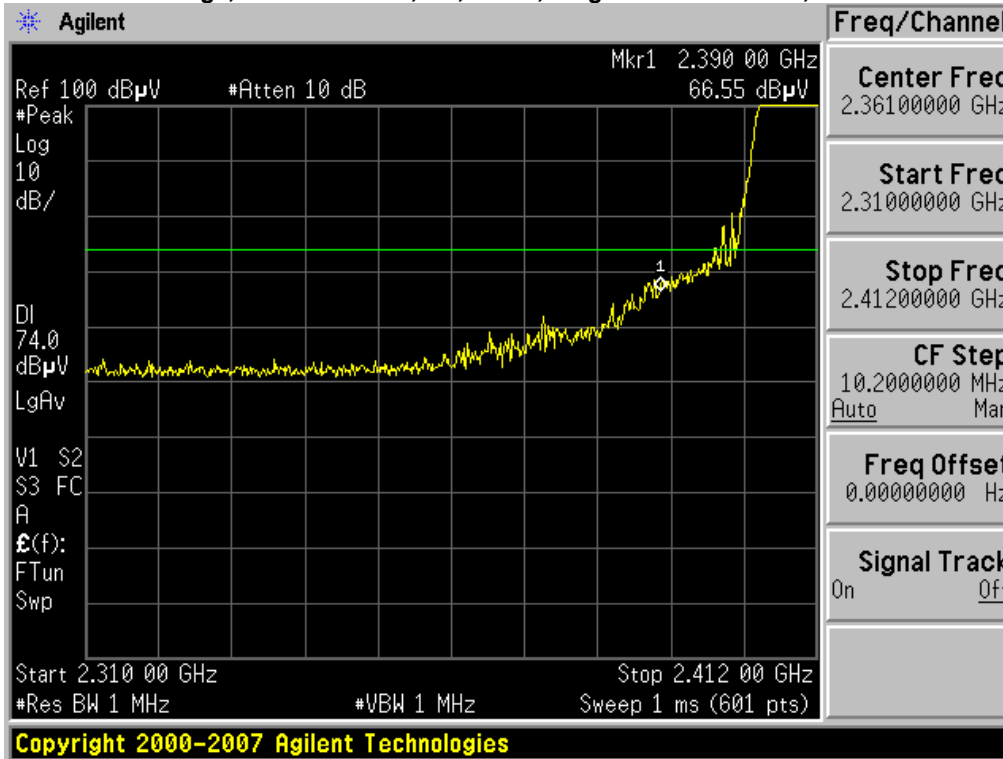


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Peak**

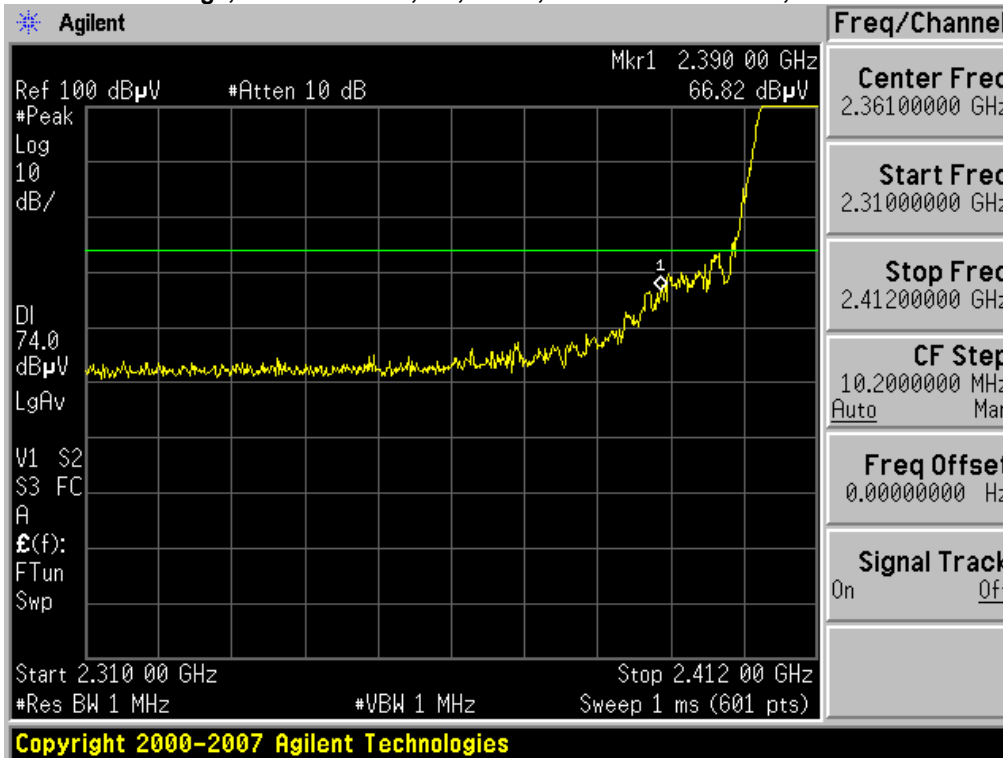




**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

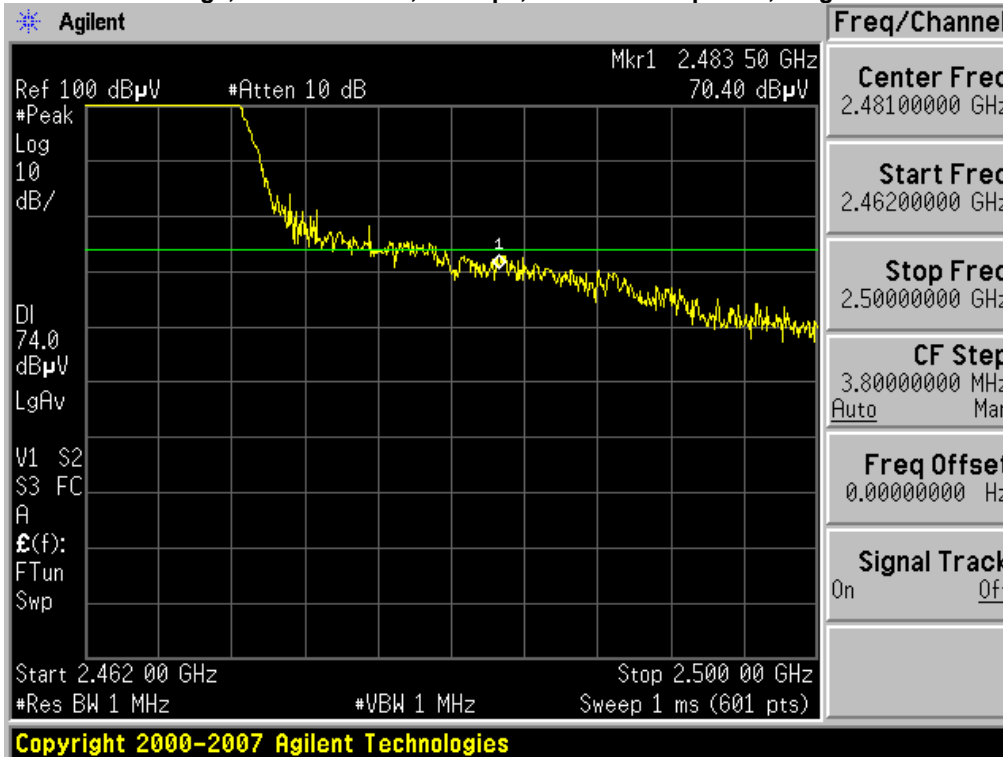


**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

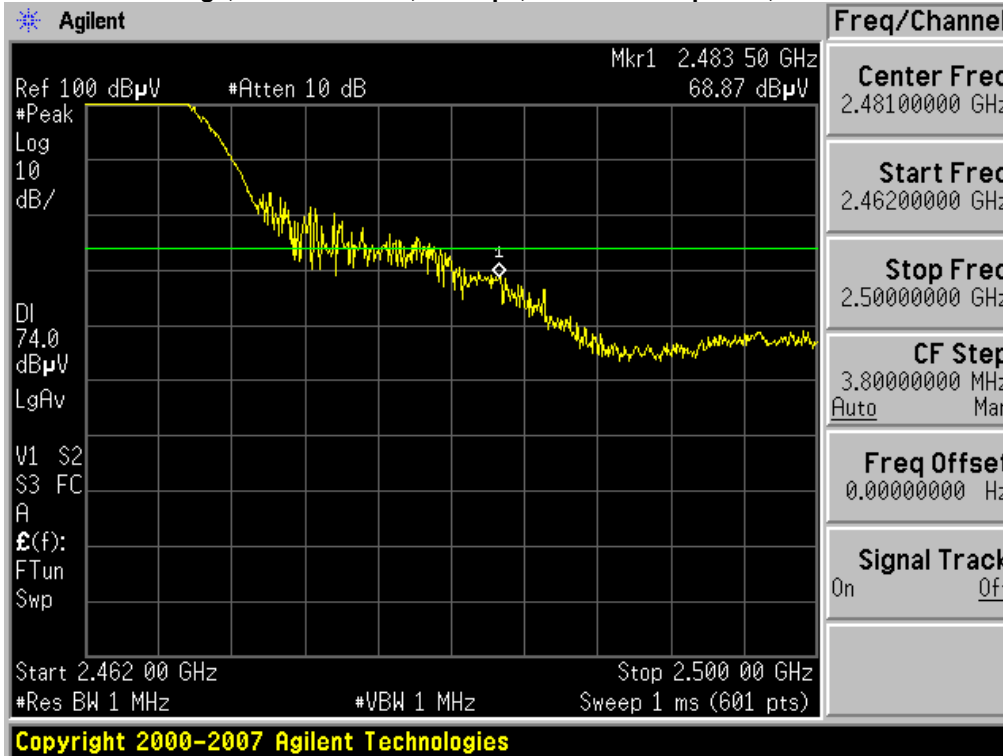




**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Peak**

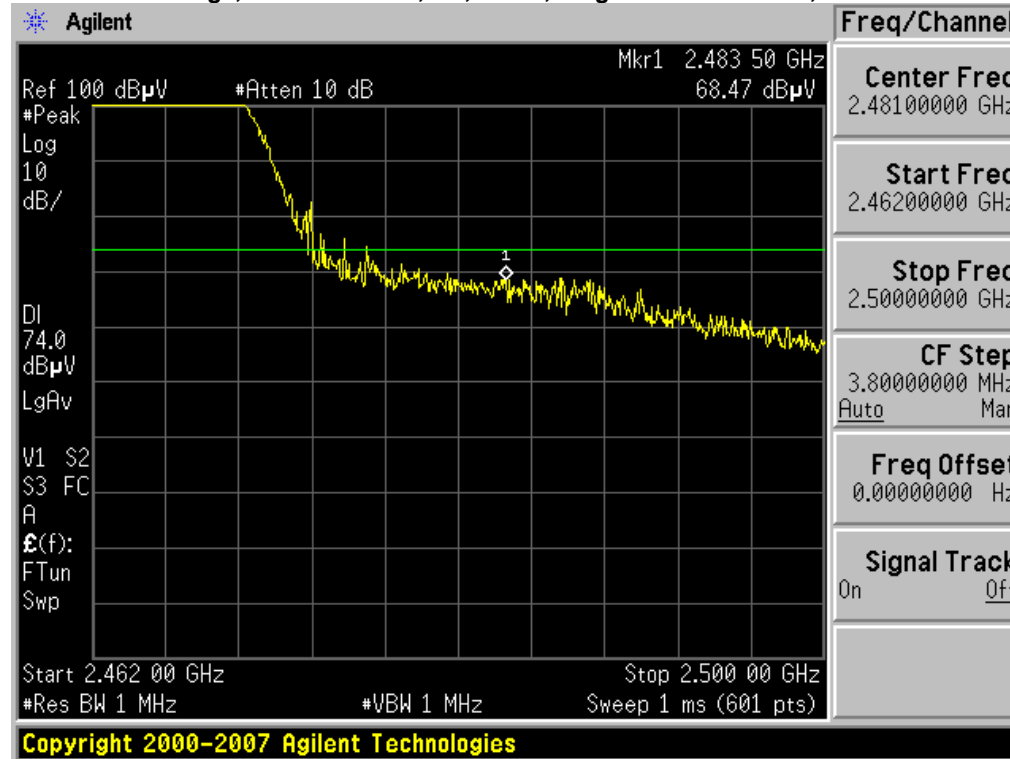

**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Peak**

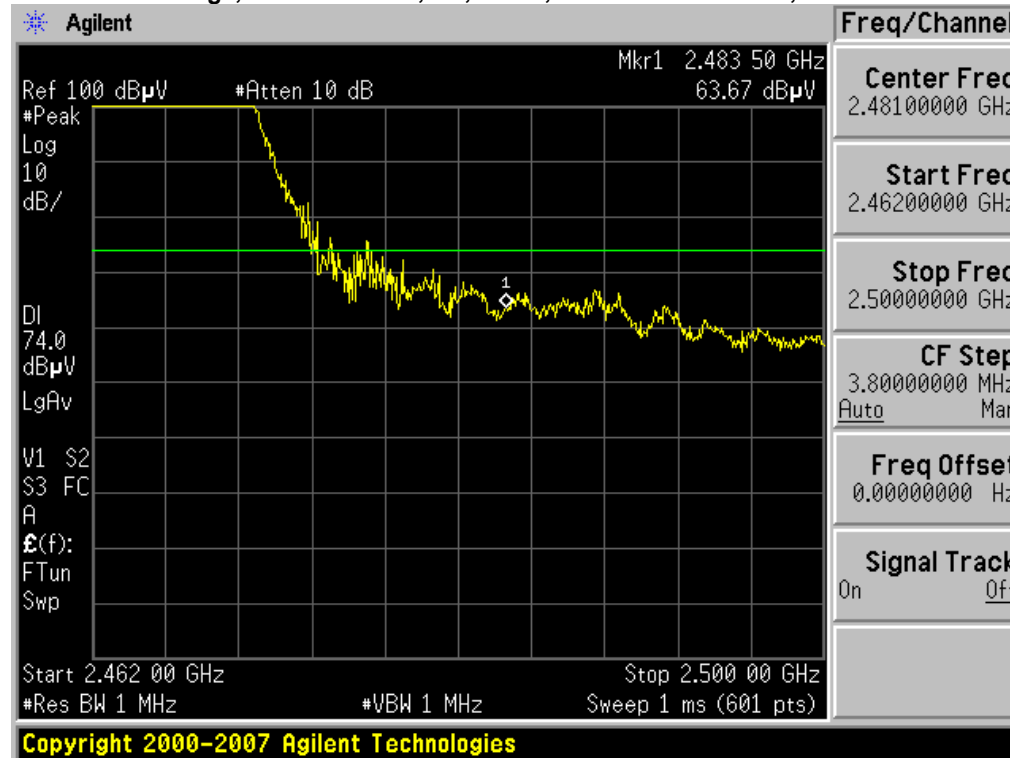




The following data reflects the worst-case emissions for all supported antennas from 4.1-6 dBi.


Frequency (MHz)	Mode	Data Rate (Mbps)	Target Total Transmit Power Level (dBm)	Radiated Band Edge Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	20	<b>50.3</b>	54	3.7
2412	Legacy CCK, Dual Tx Path	11	21	<b>51.2</b>	54	2.8
2412	Non HT-20, Single Tx Path	54	17	<b>52.1</b>	54	1.9
2412	Non HT-20, Dual Tx Path	54	19	<b>50.2</b>	54	3.8
2412	Non HT-20 Beam Forming	54	16	<b>53.5</b>	54	0.5
2462	Legacy CCK, Single Tx Path	11	20	<b>50.9</b>	54	3.1
2462	Legacy CCK, Dual Tx Path	11	21	<b>50.3</b>	54	3.8
2462	Non HT-20, Single Tx Path	54	17	<b>52.7</b>	54	1.3
2462	Non HT-20, Dual Tx Path	54	17	<b>51.7</b>	54	2.3
2462	Non HT-20 Beam Forming	54	14	<b>51.3</b>	54	2.7
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	12	<b>53.2</b>	54	0.8
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	13	<b>53.6</b>	54	0.4
2412/2432	HT-40, Single Tx Path	M7	14	<b>53.7</b>	54	0.4
2412/2432	HT-40, Dual Tx Path	M7	15	<b>52.3</b>	54	1.7
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	12	<b>51.1</b>	54	2.9
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	13	<b>52.7</b>	54	1.3
2442/2462	HT-40, Single Tx Path	M7	14	<b>53.1</b>	54	0.9
2442/2462	HT-40, Dual Tx Path	M7	15	<b>53.5</b>	54	0.5



**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

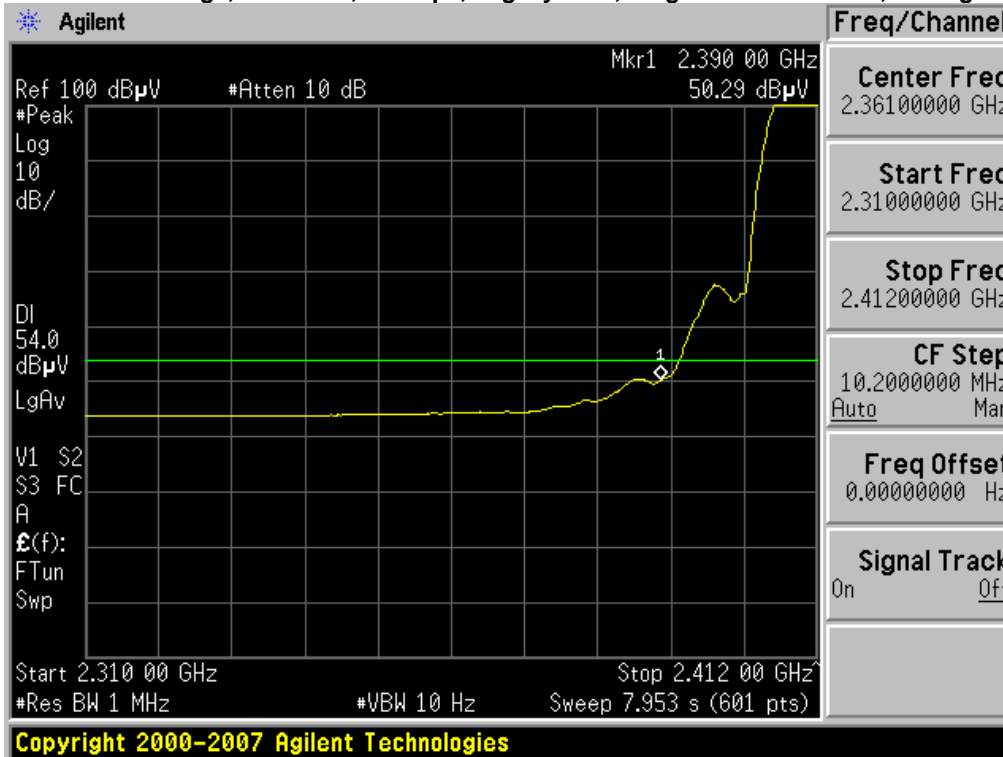


**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

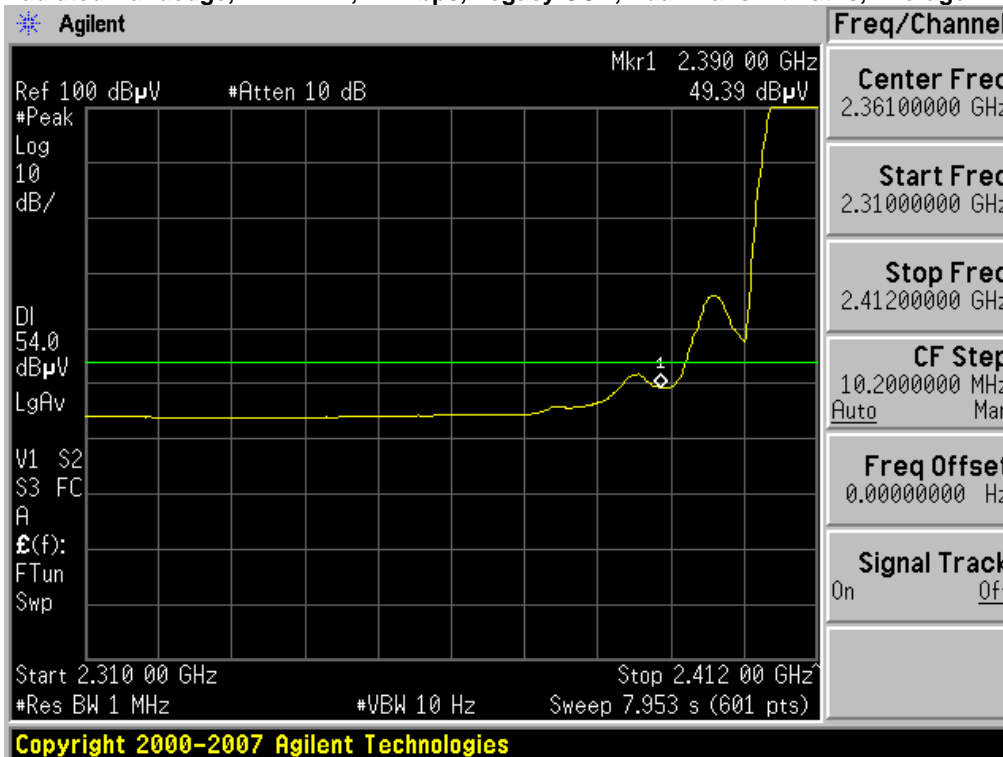



**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Average**

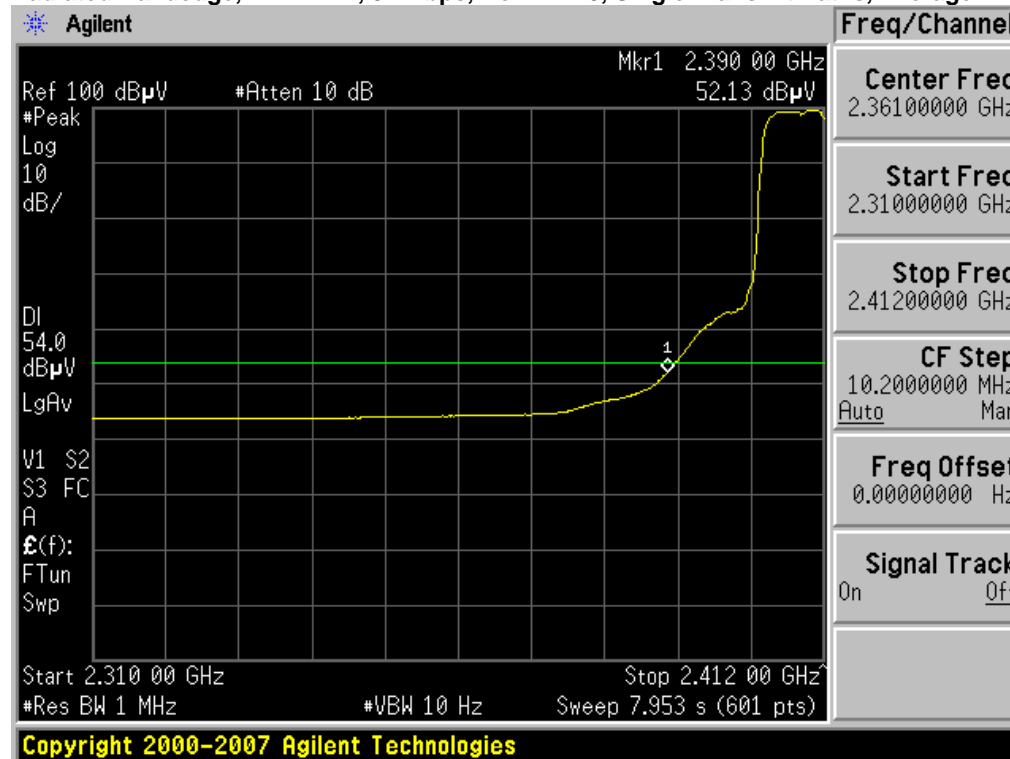


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average**








**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average**

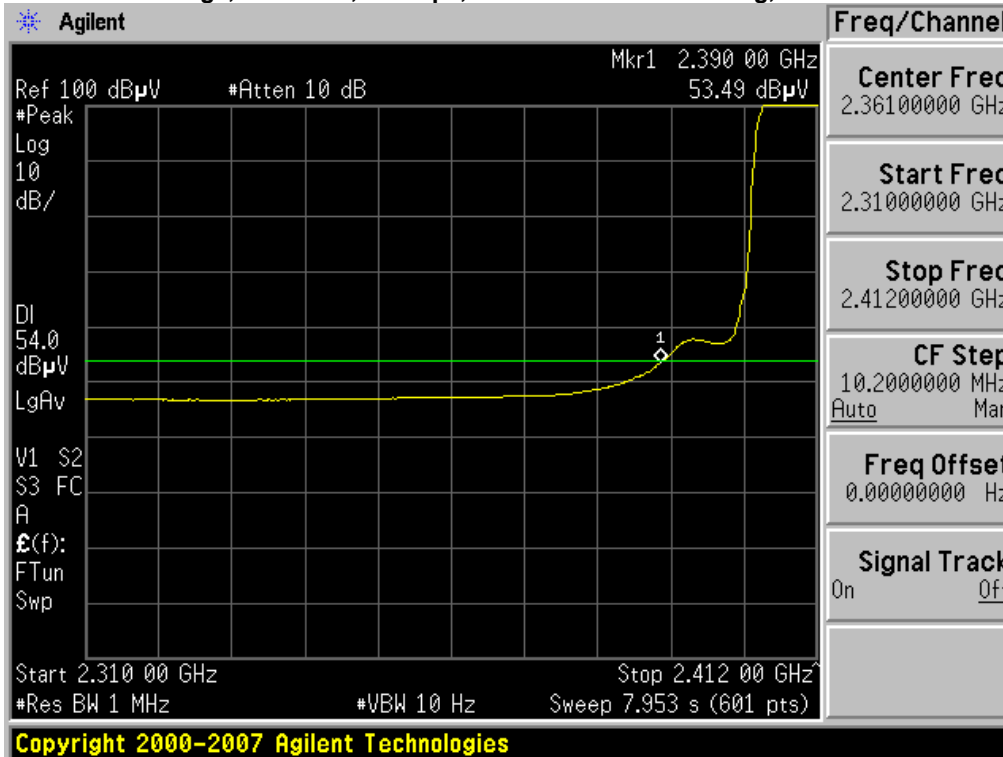


**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

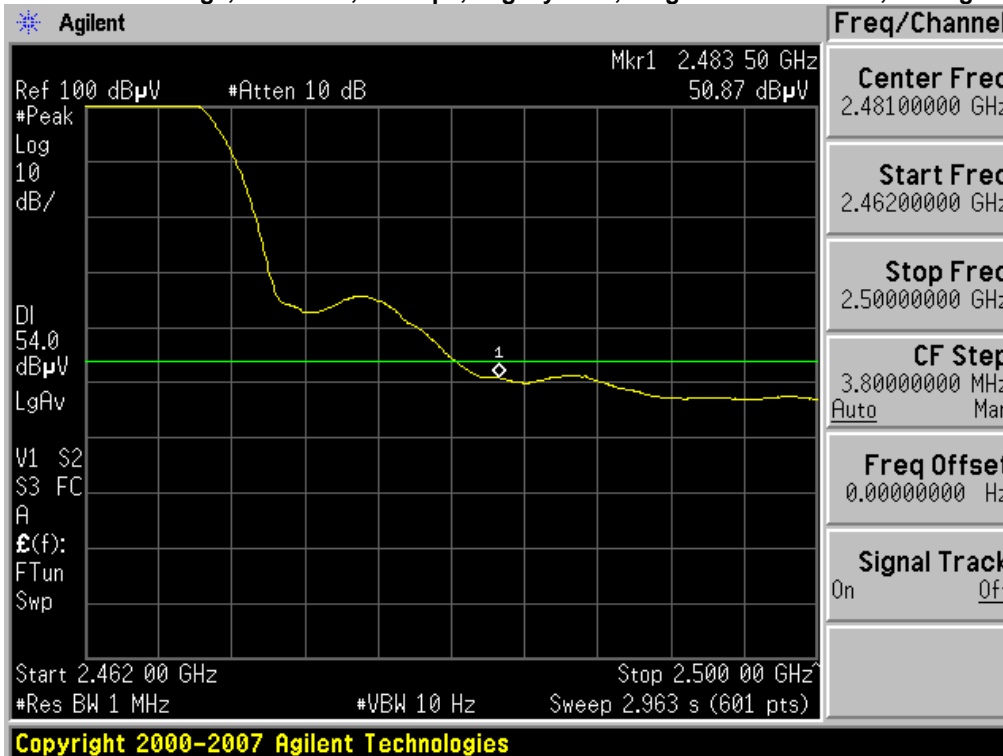




**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

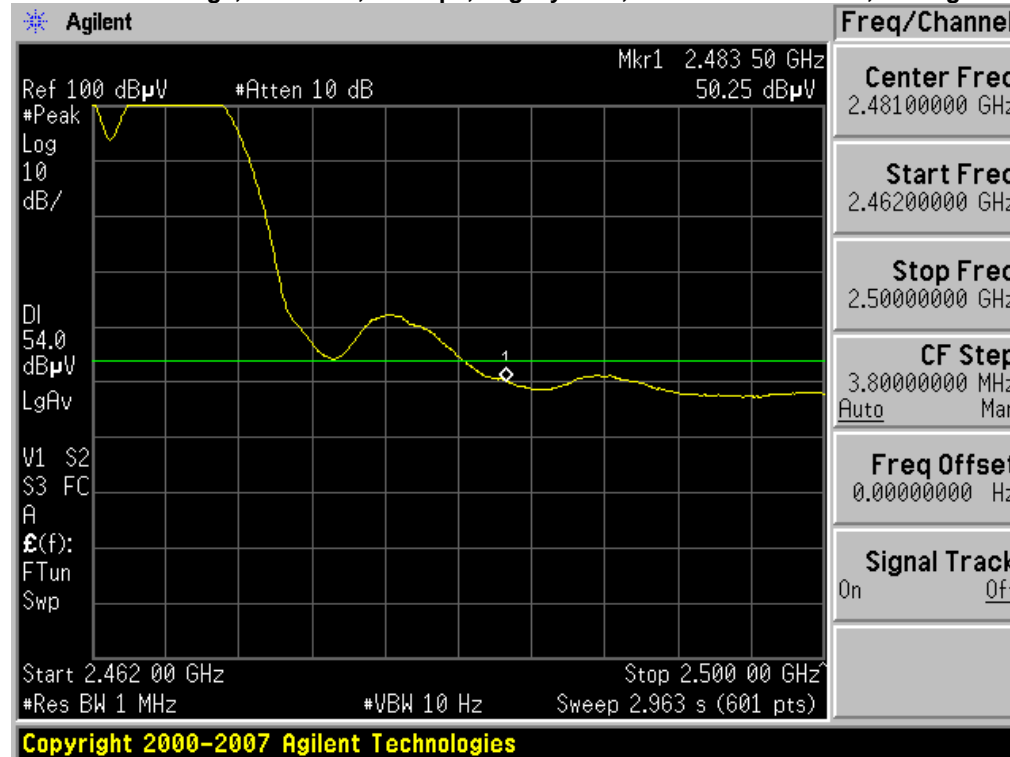


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Average**

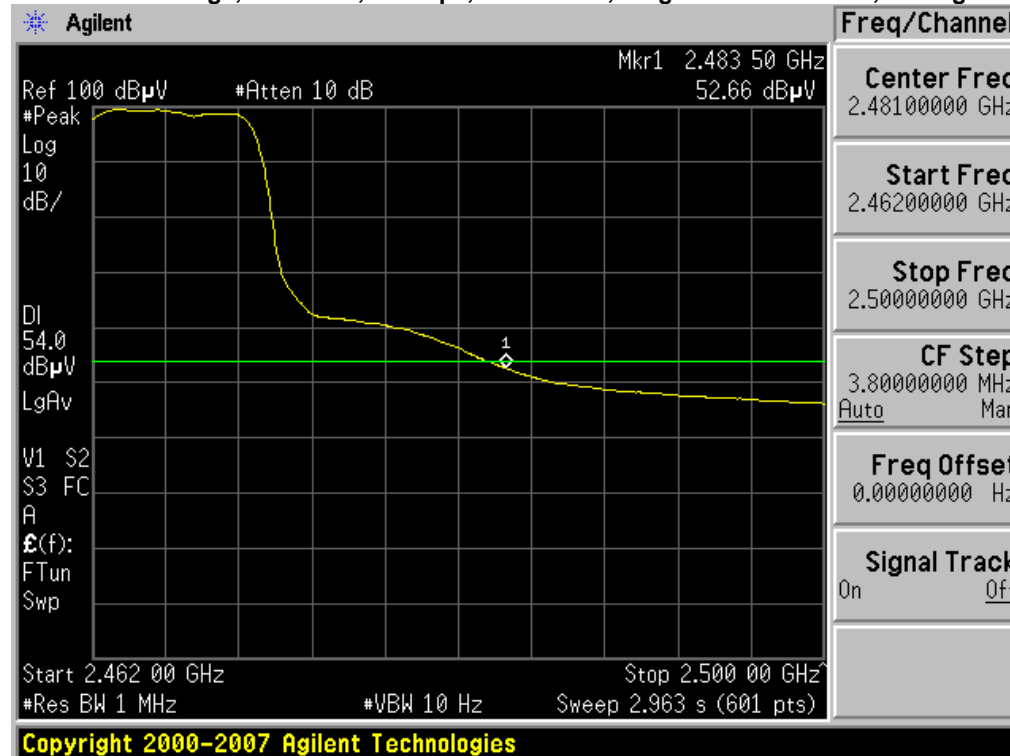




**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average**

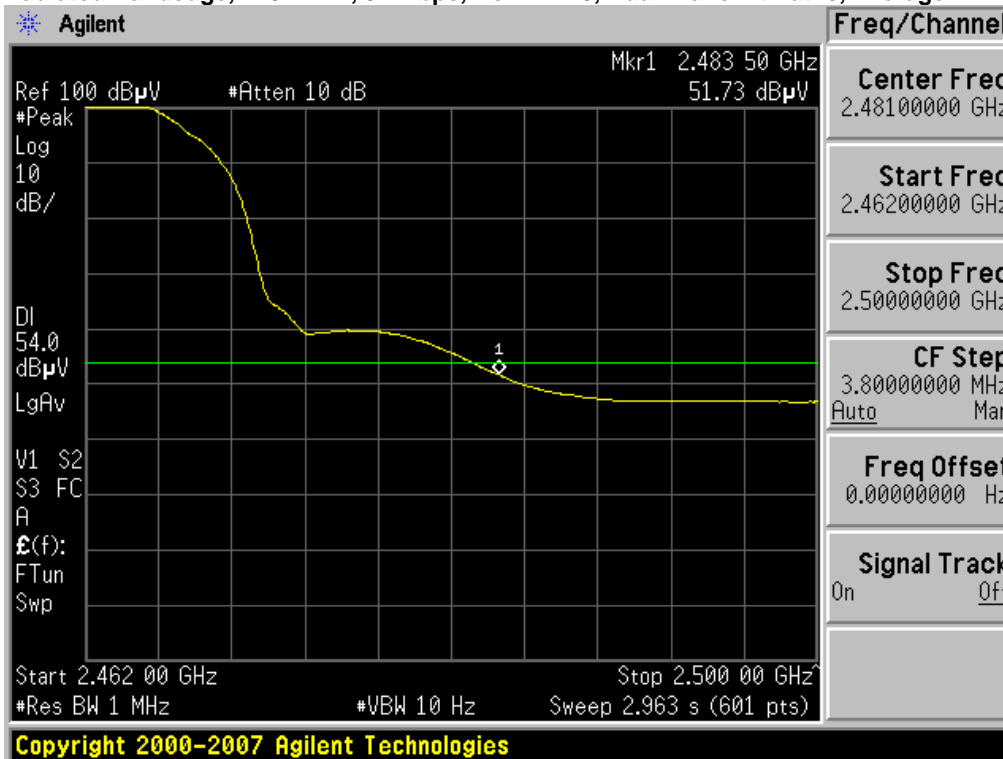


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average**

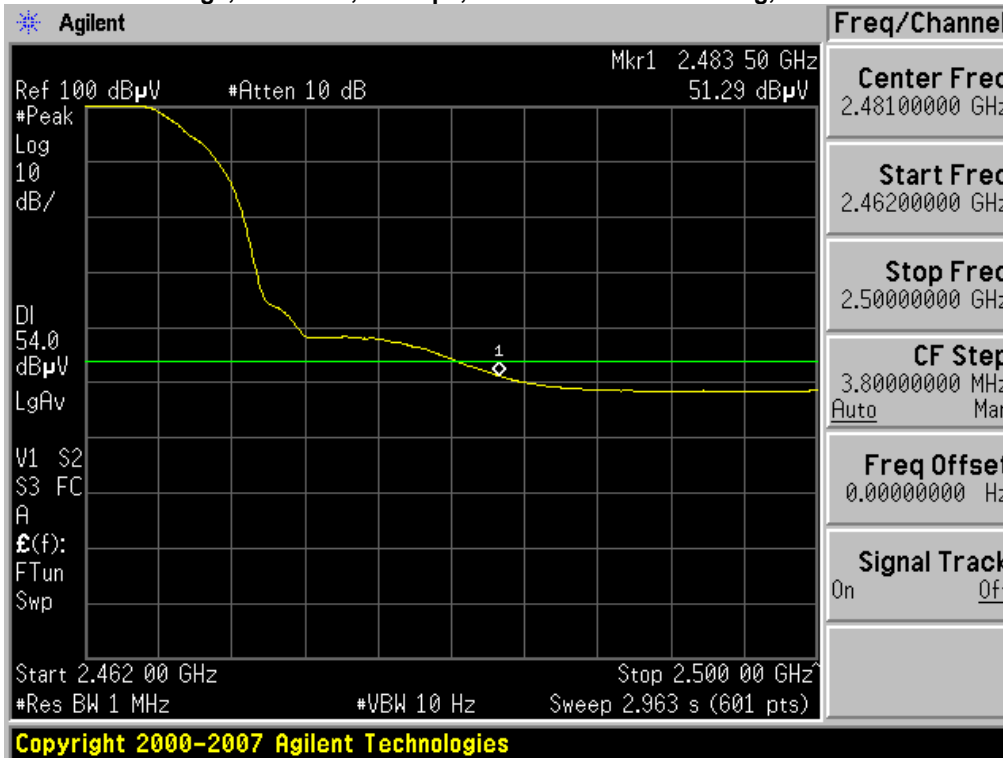




**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average**

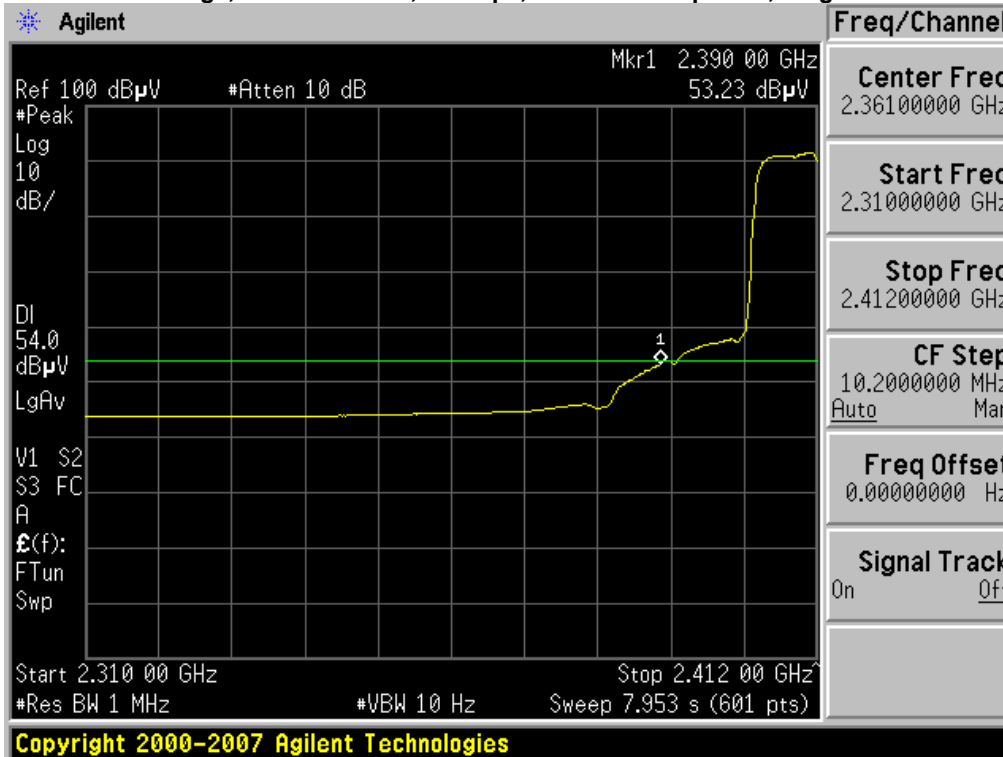


**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

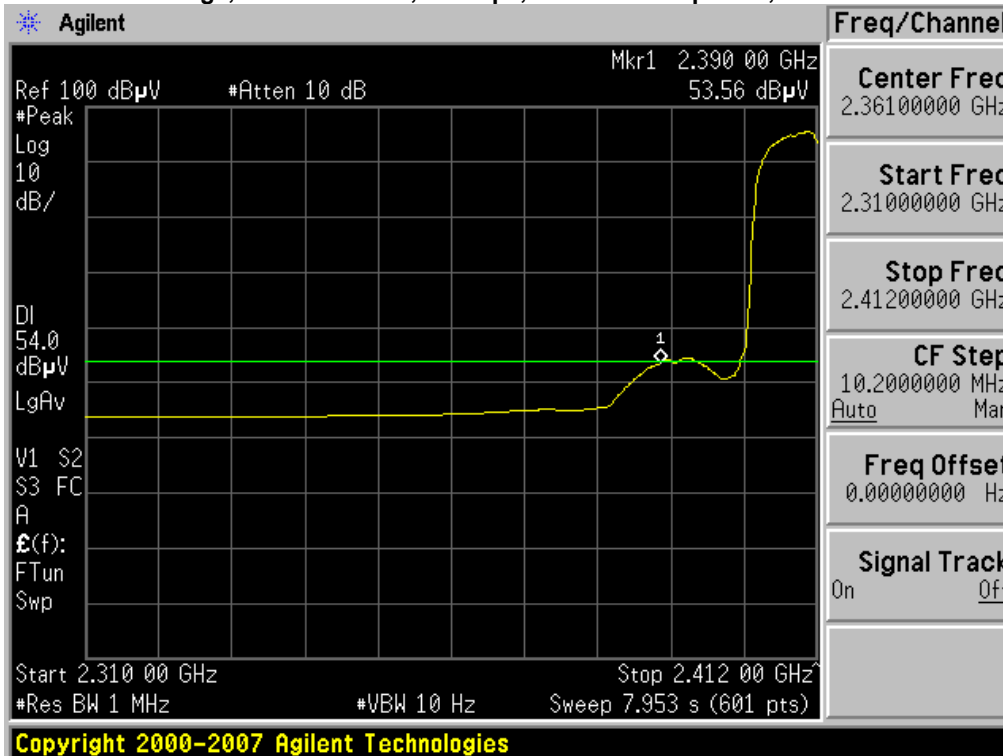




**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Average**

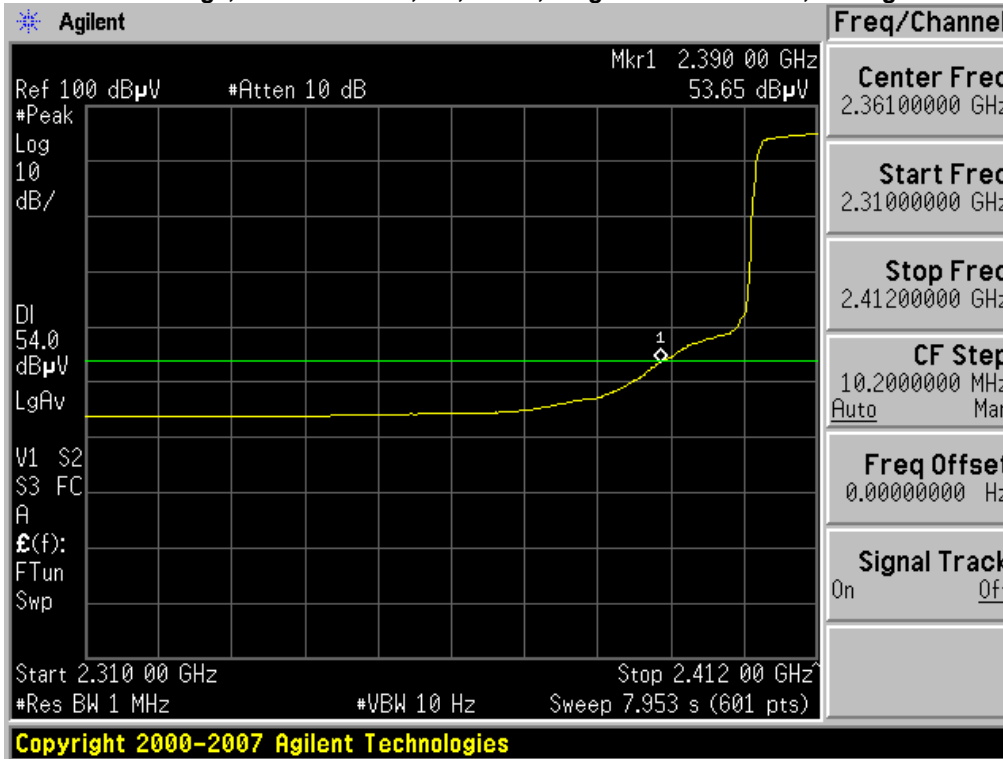


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Average**

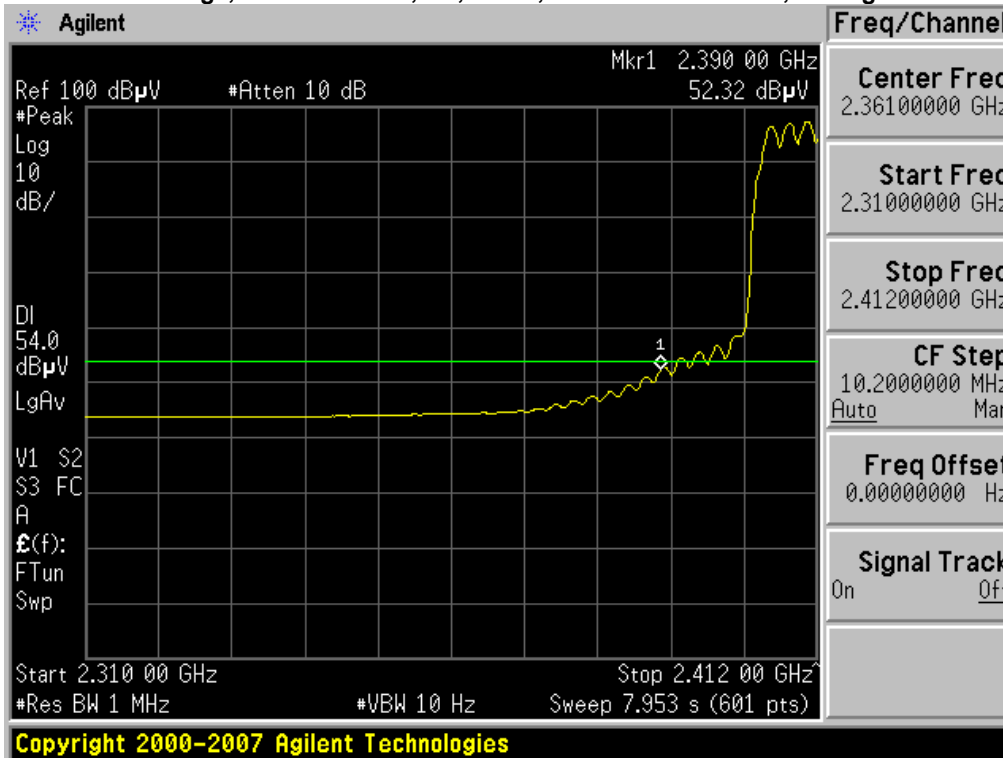




**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average**

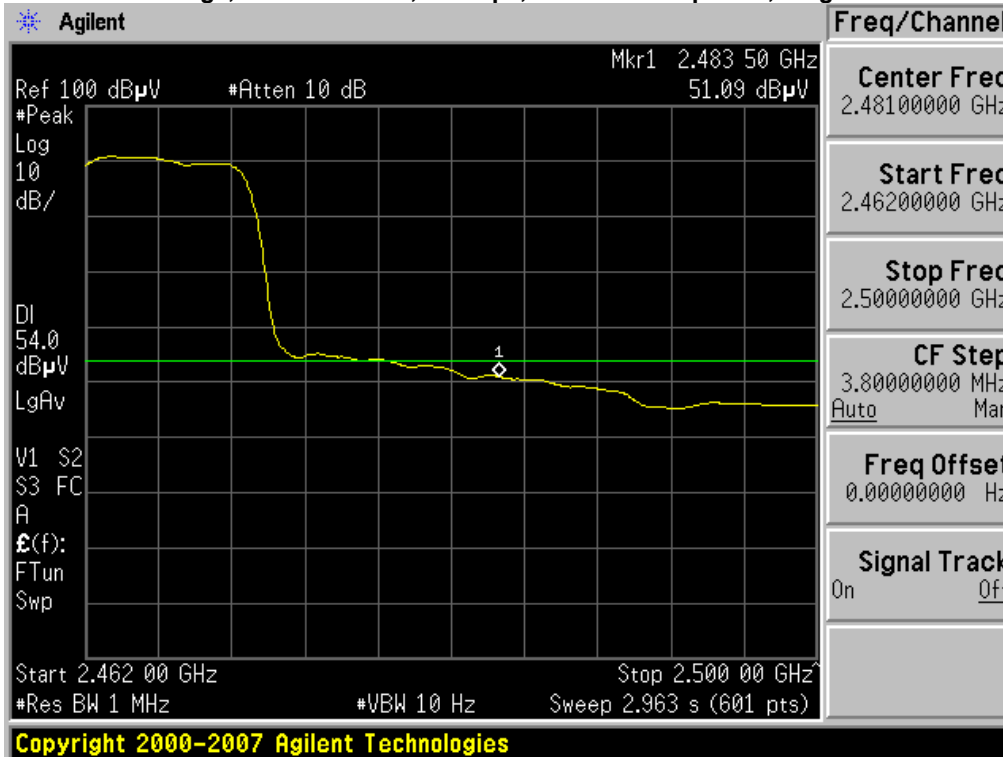


**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

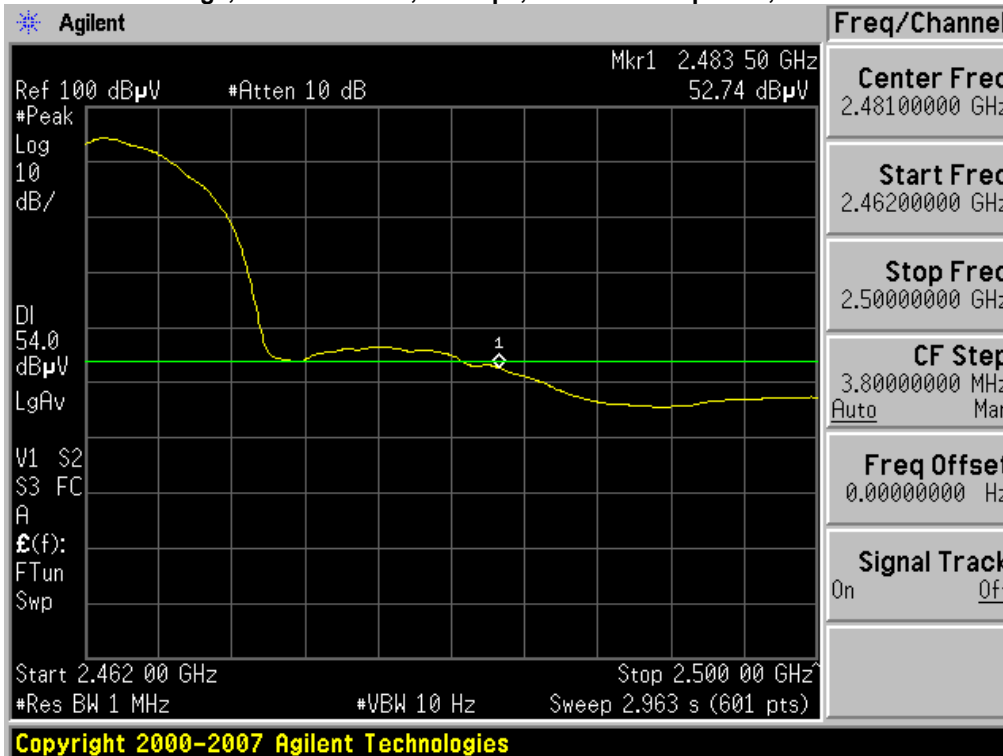




**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Average**

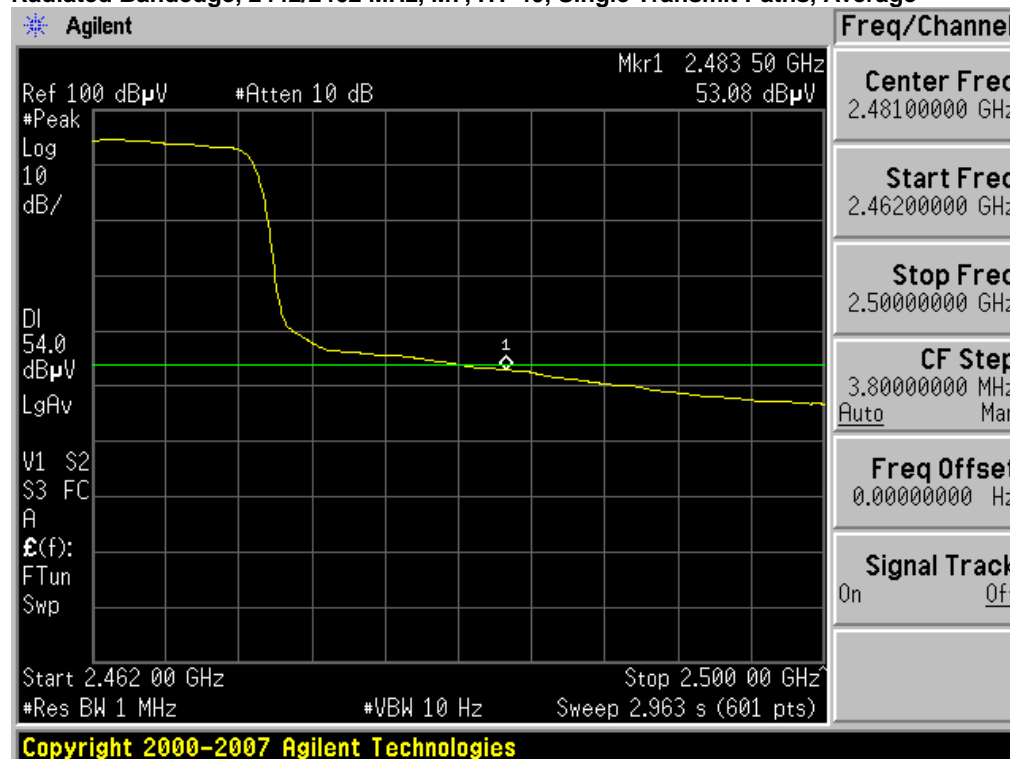


**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Average**

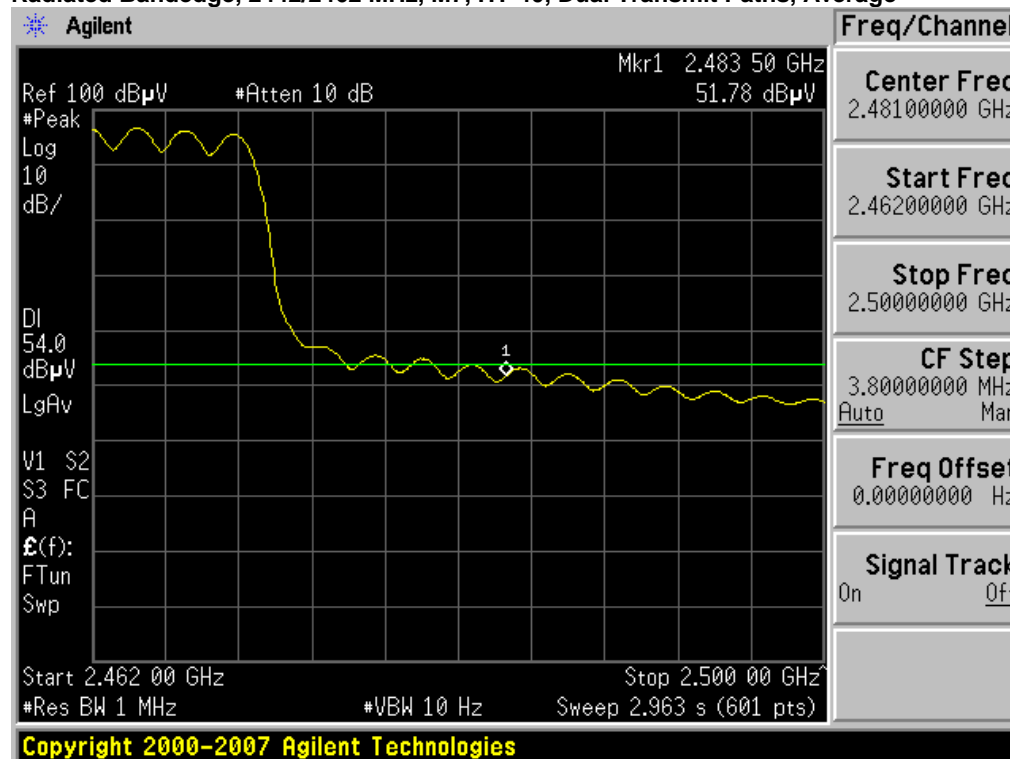




**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**

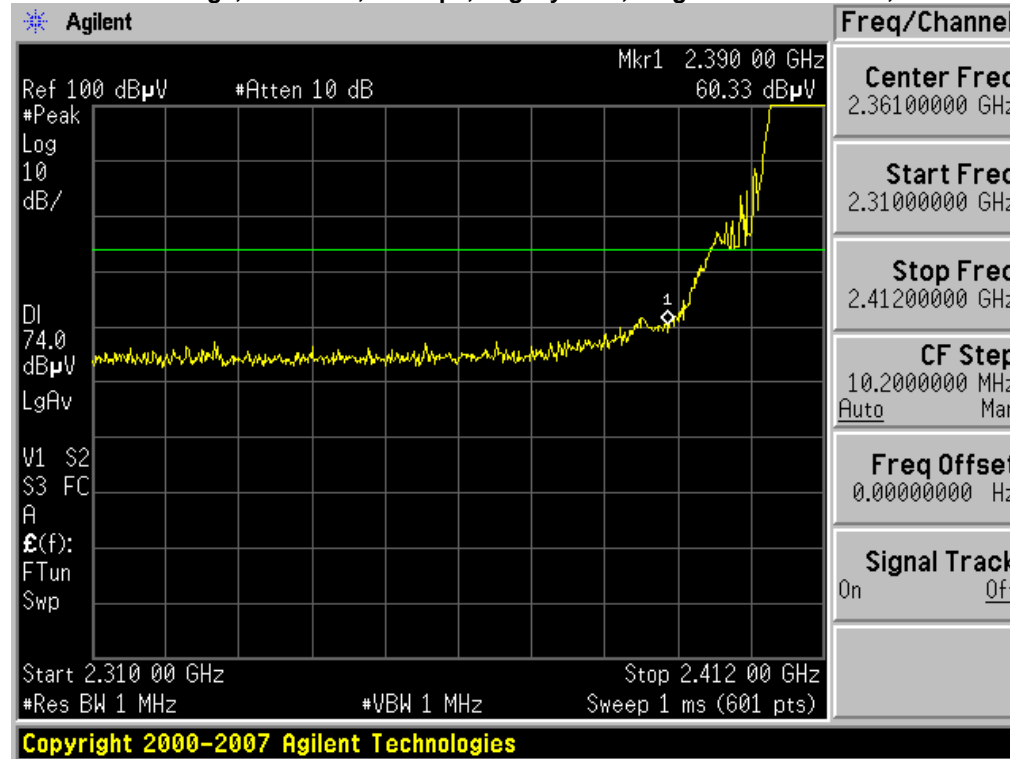


**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

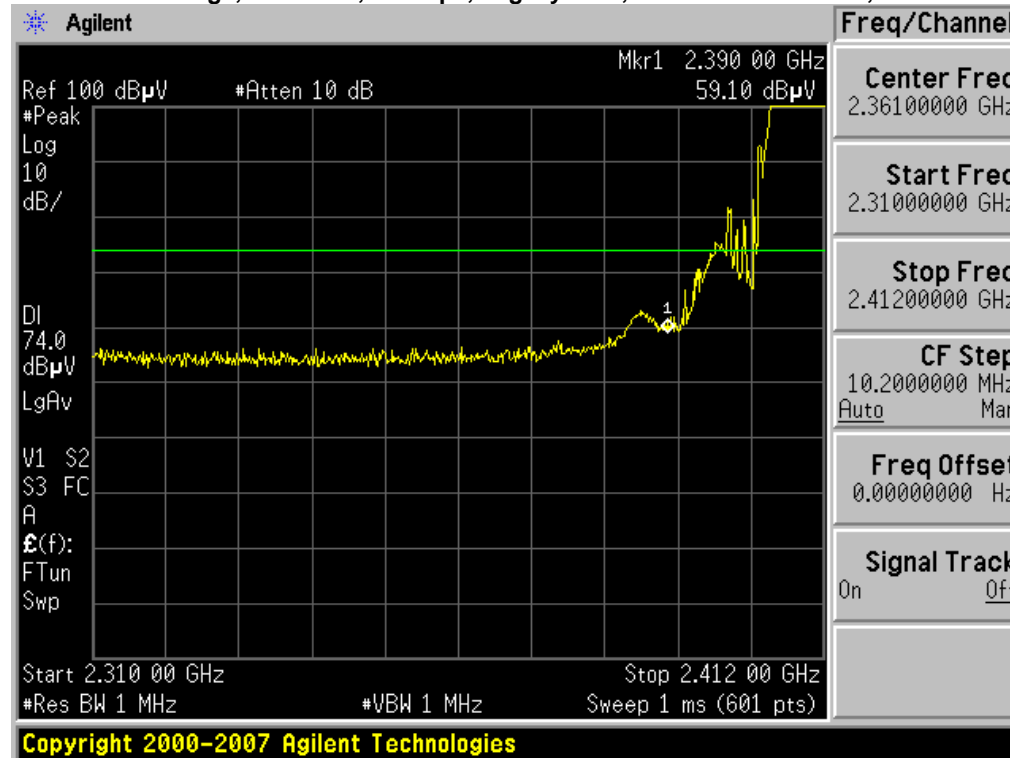






**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Peak**

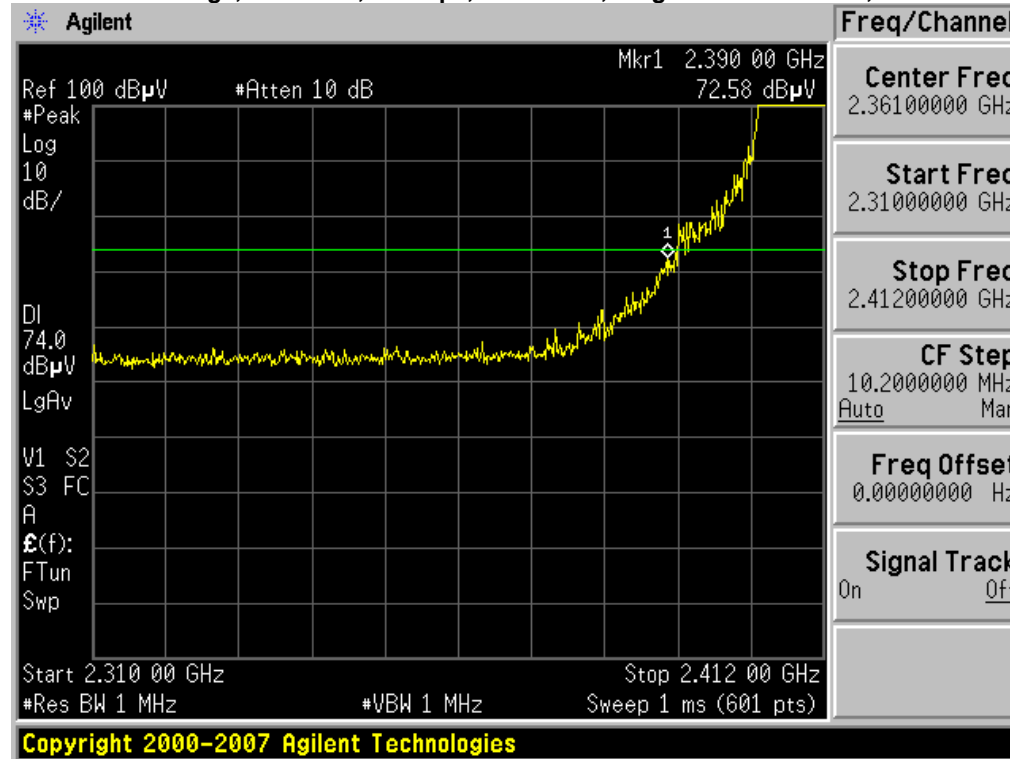


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**

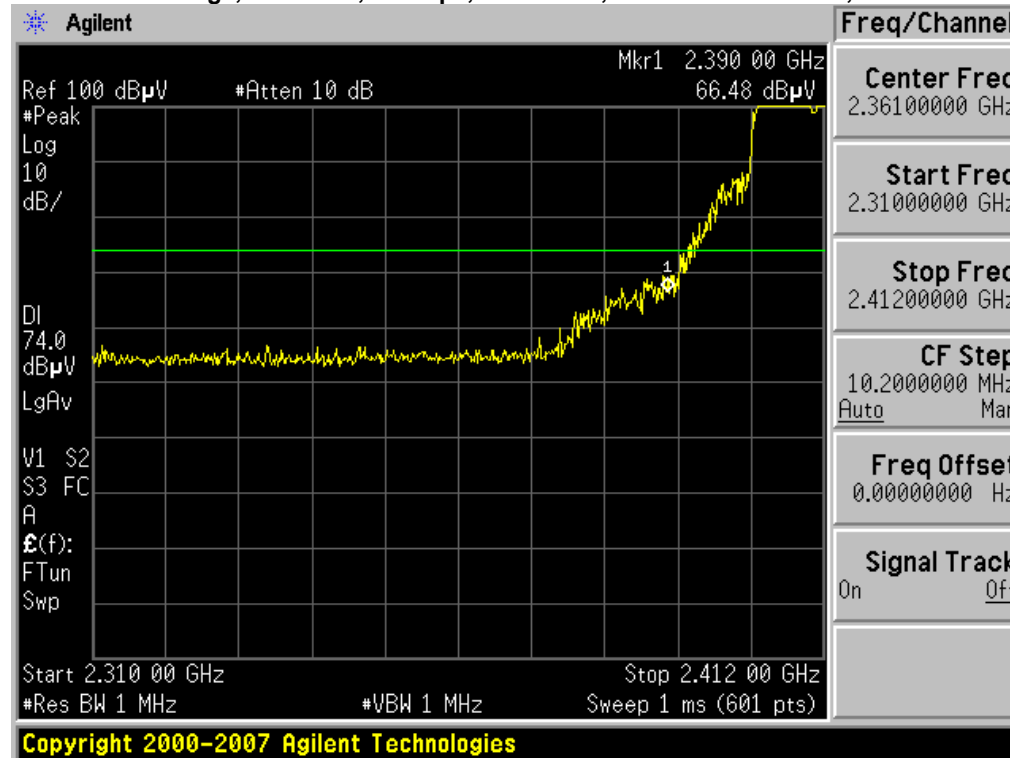




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

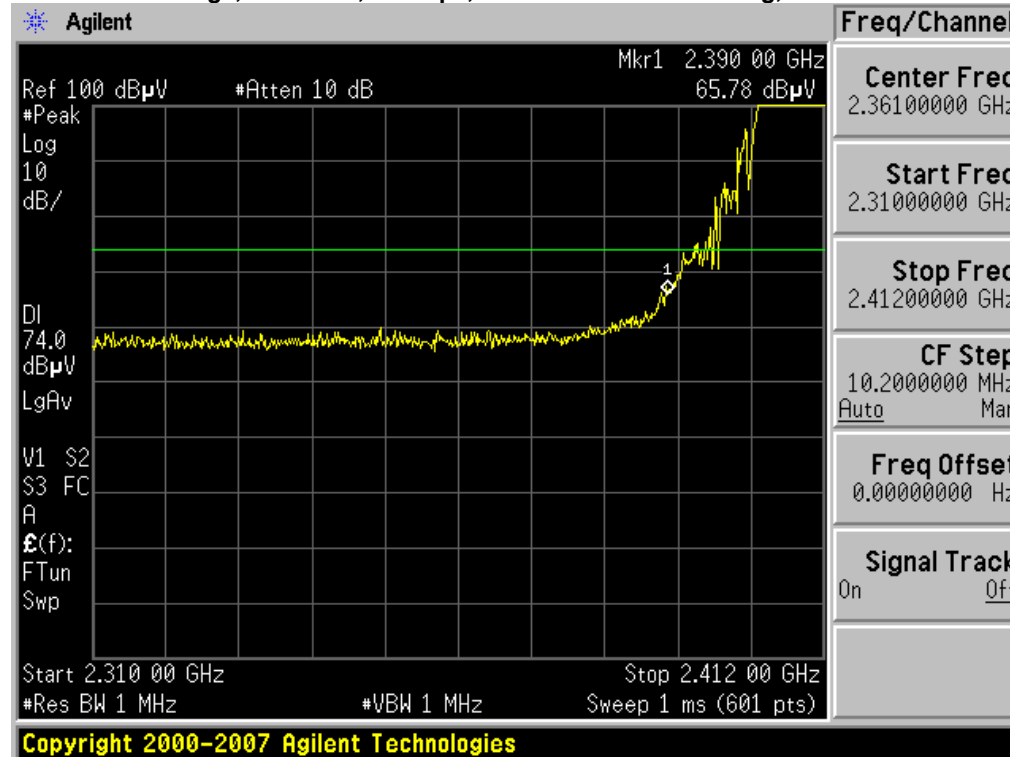


**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**

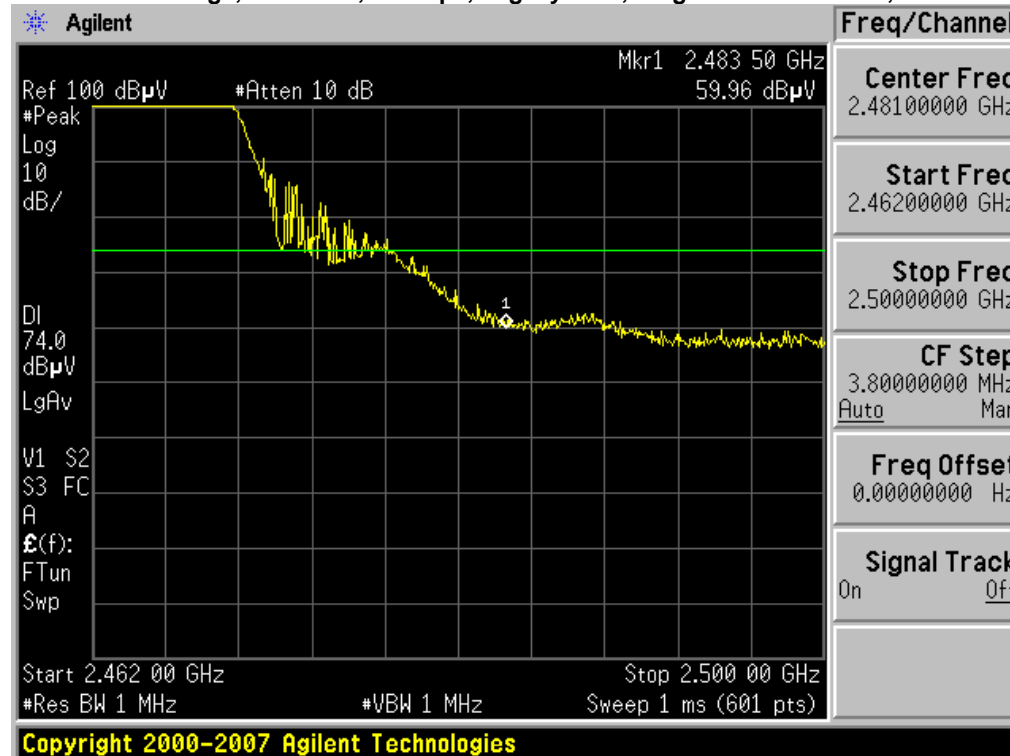




**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

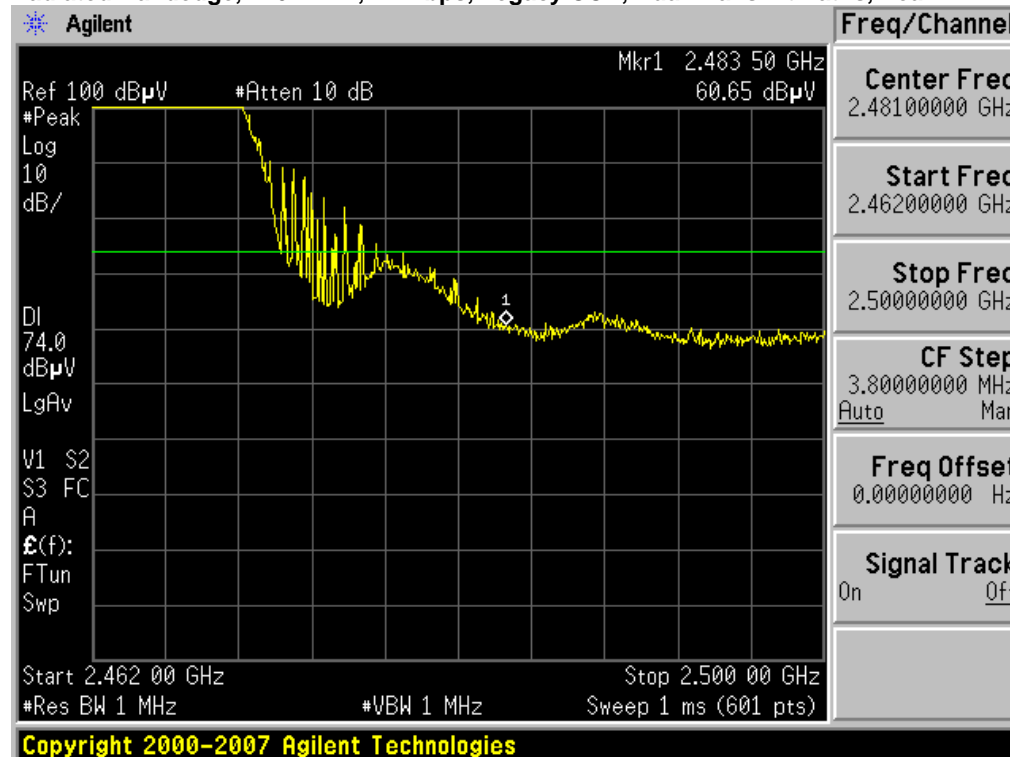


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Peak**

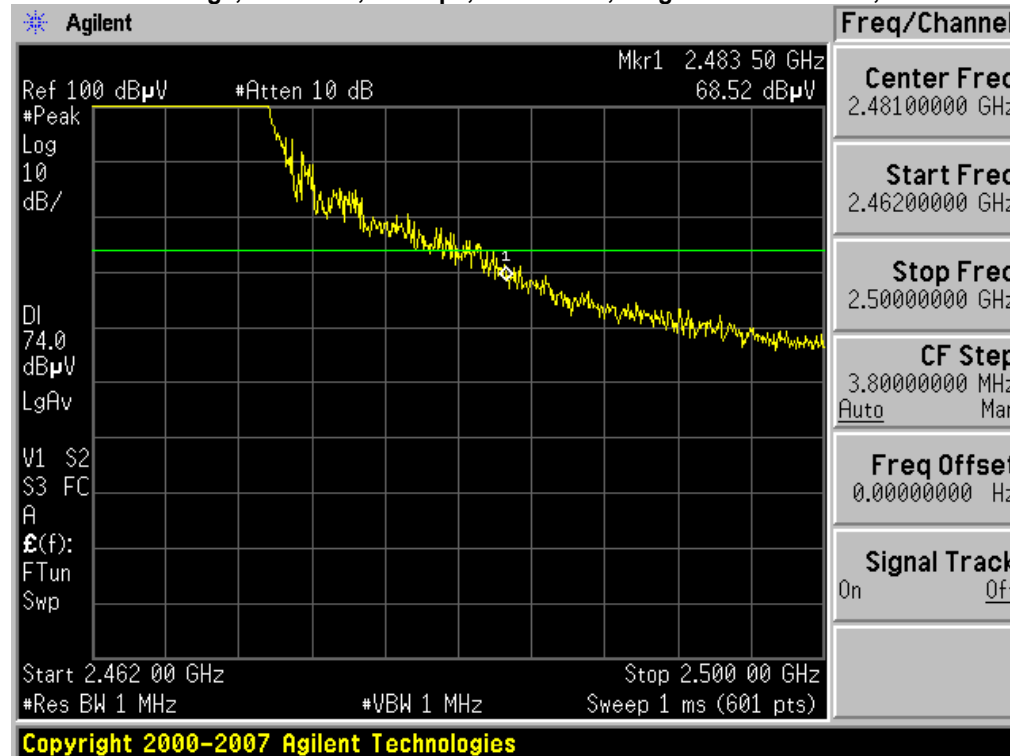




**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**

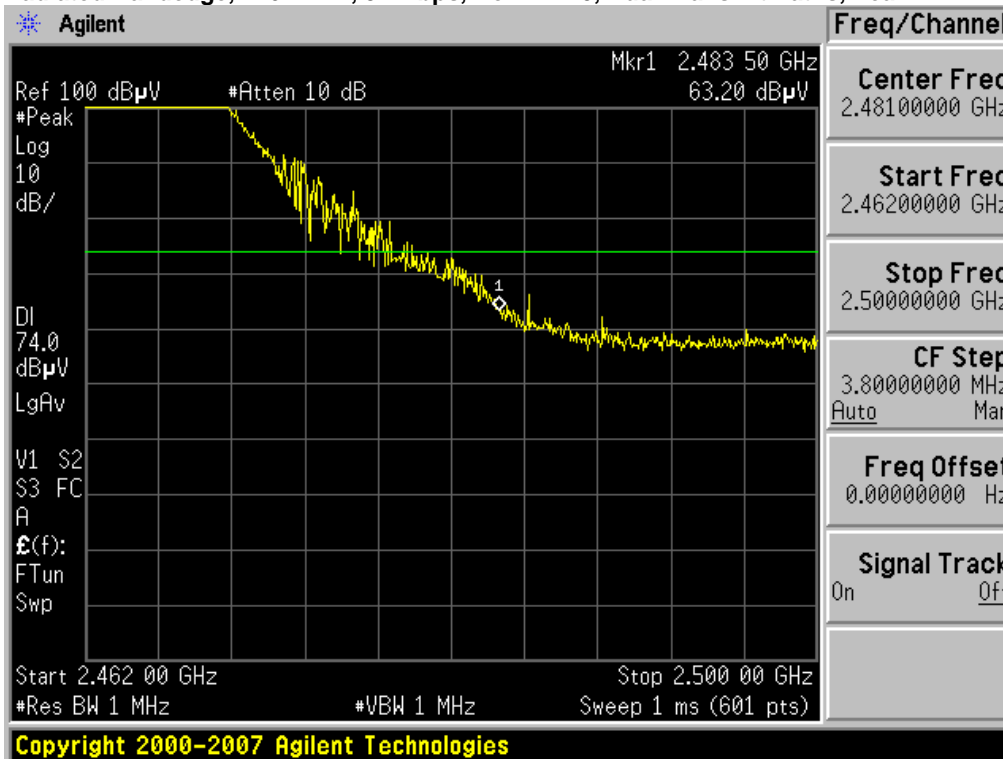


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

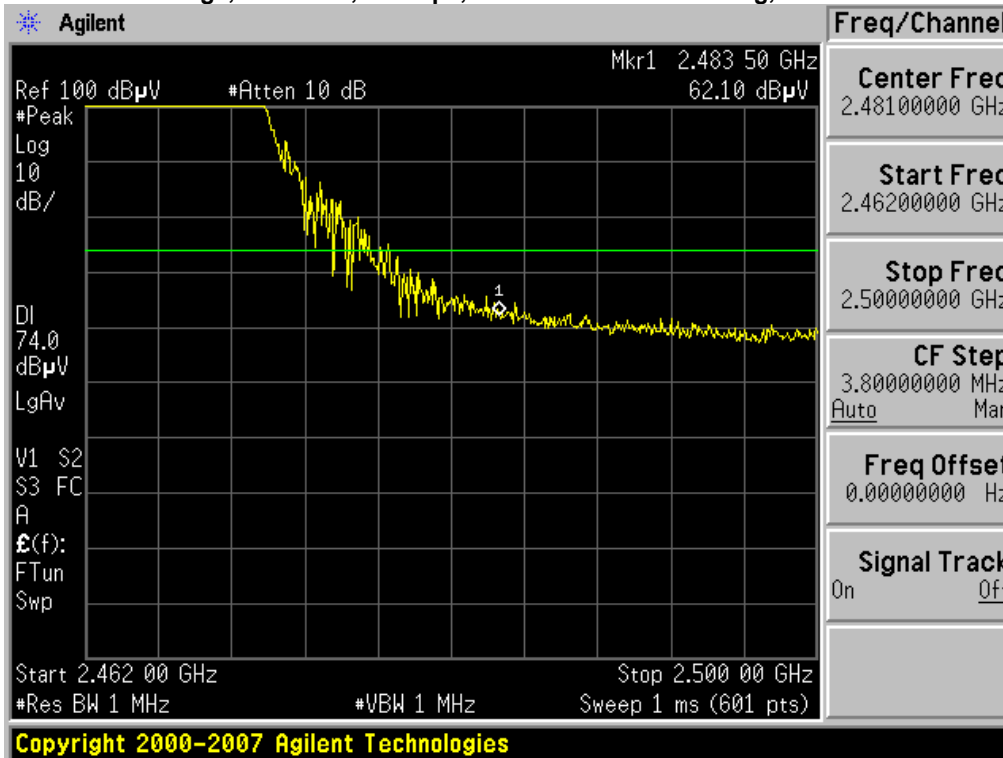




**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

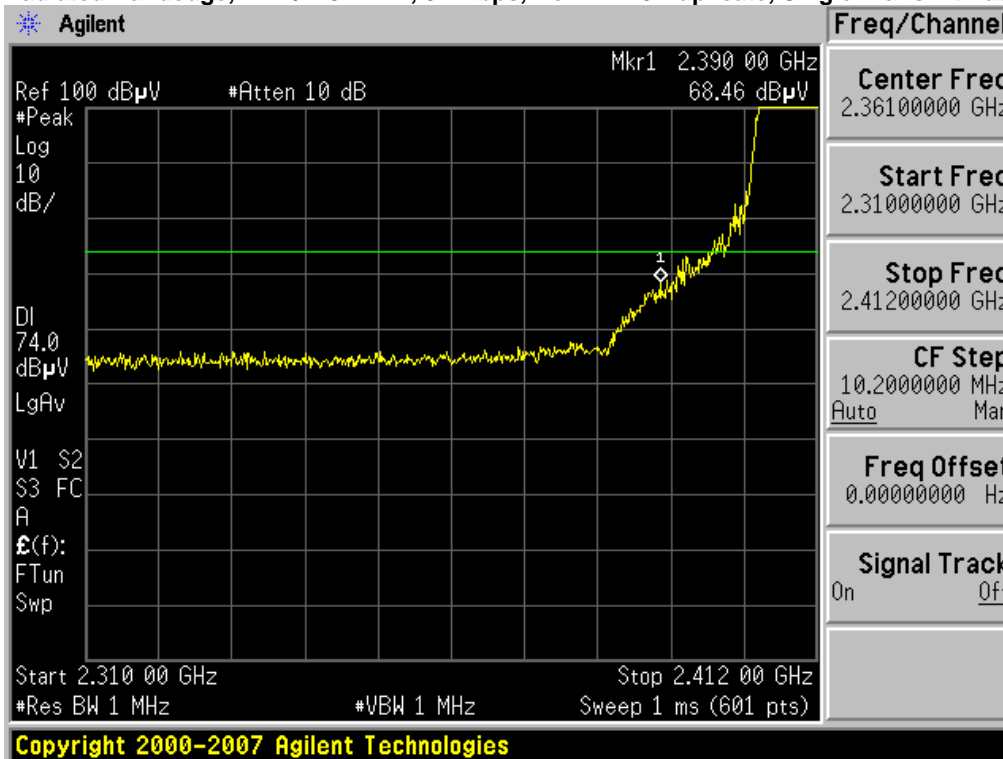


**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

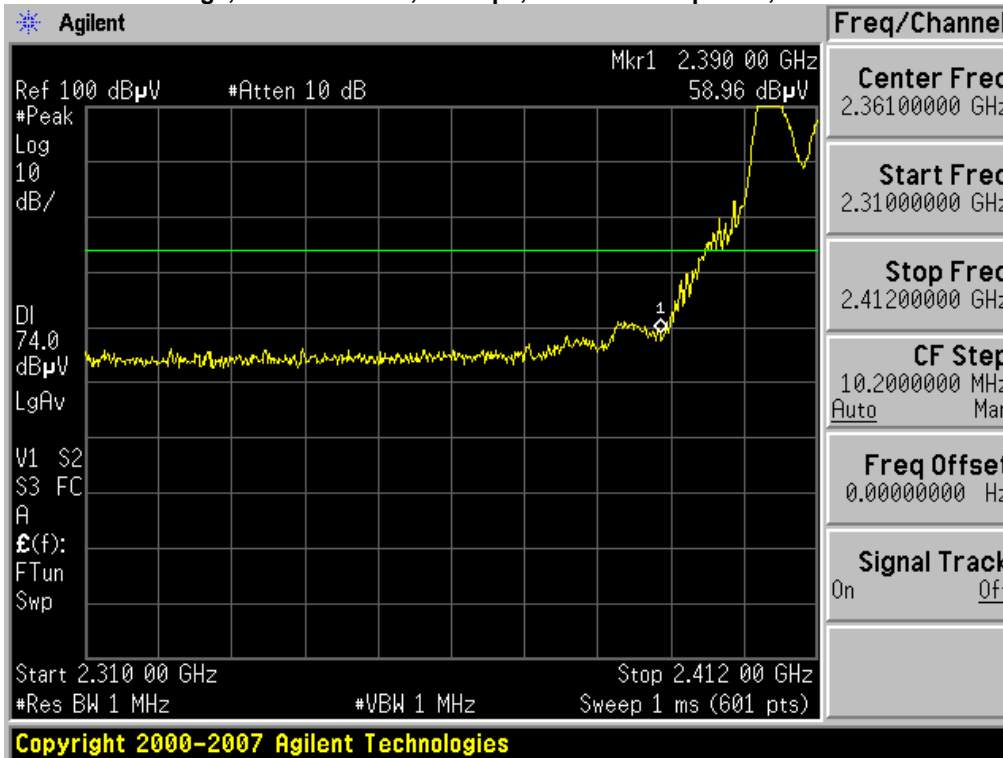




**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Peak**

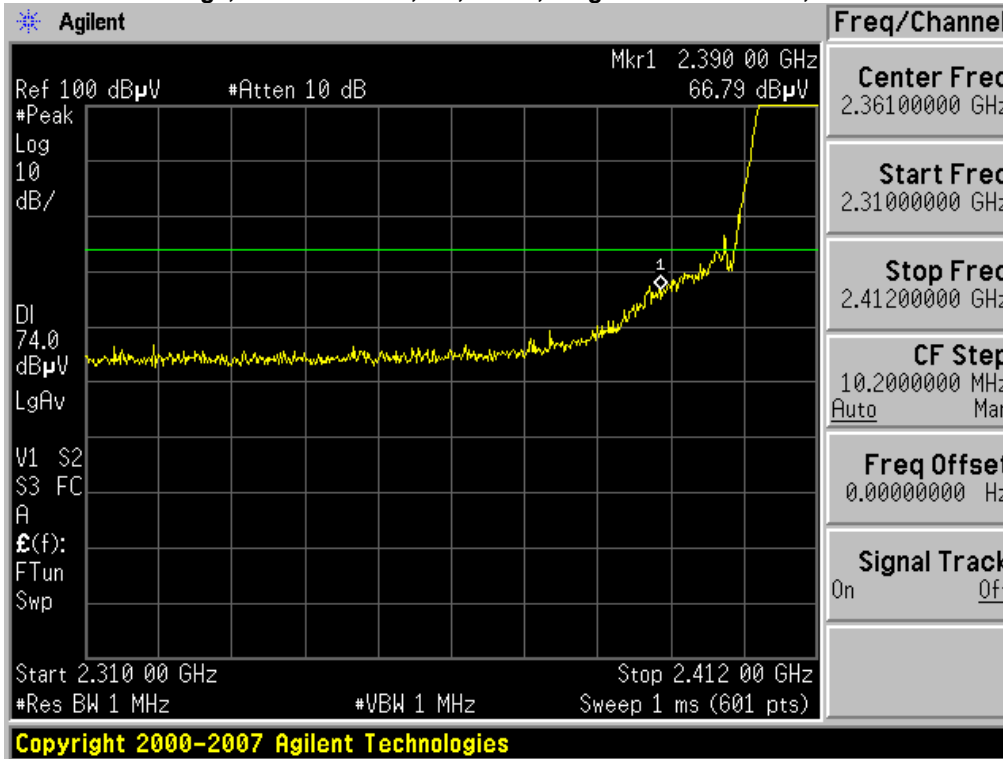


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Peak**

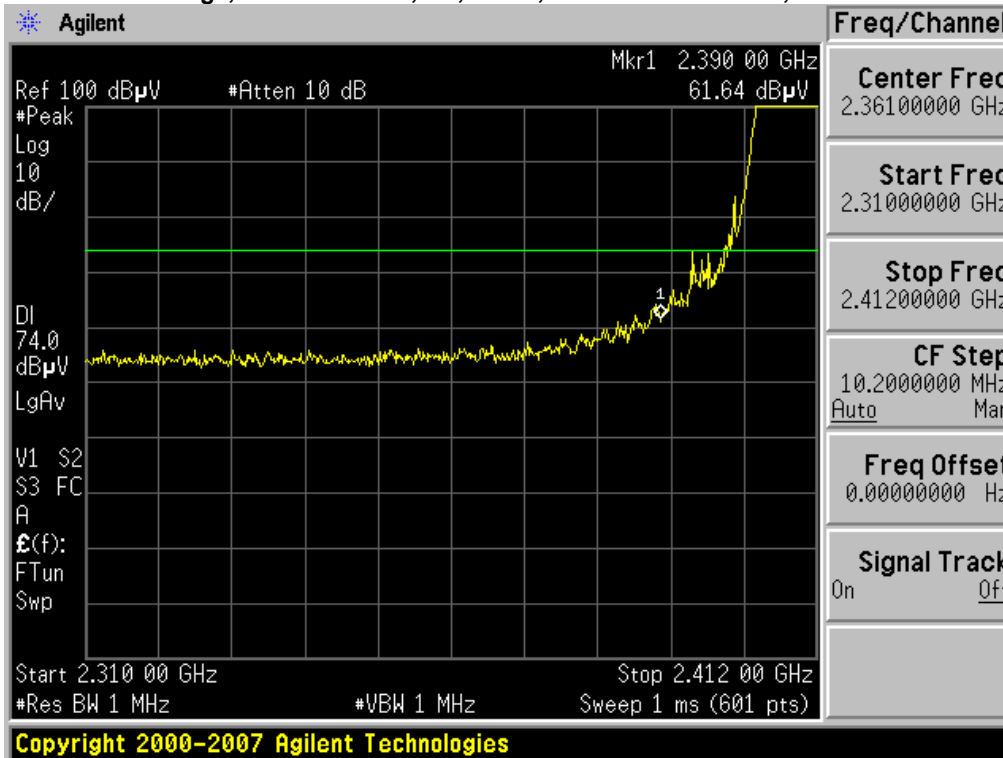




**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

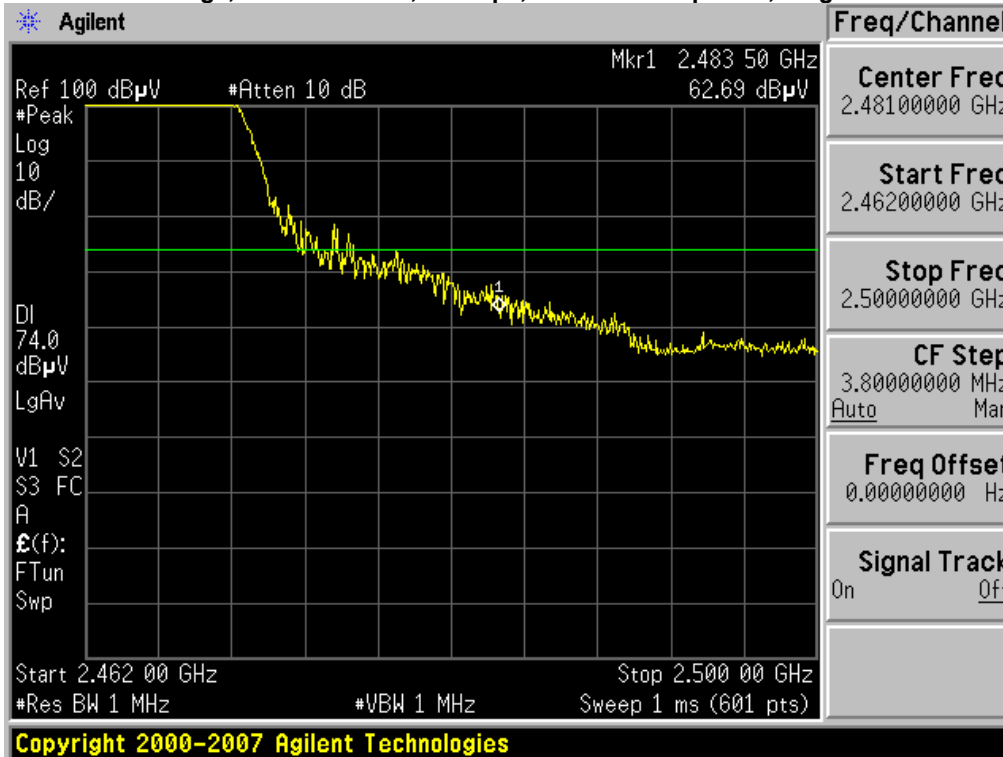


**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

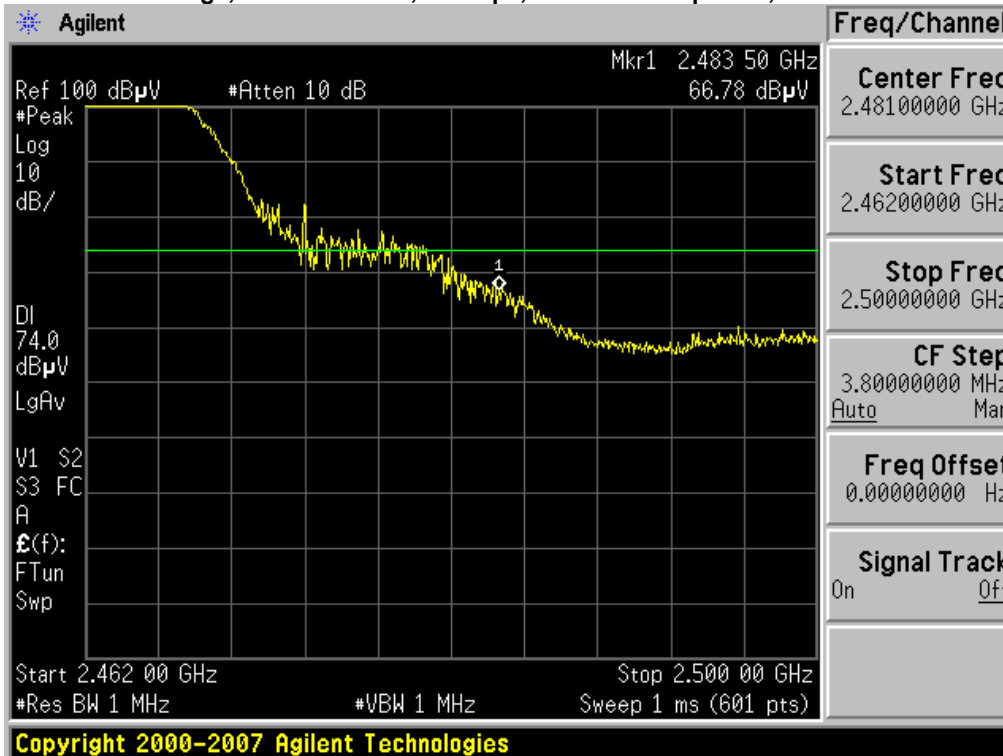




**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Peak**

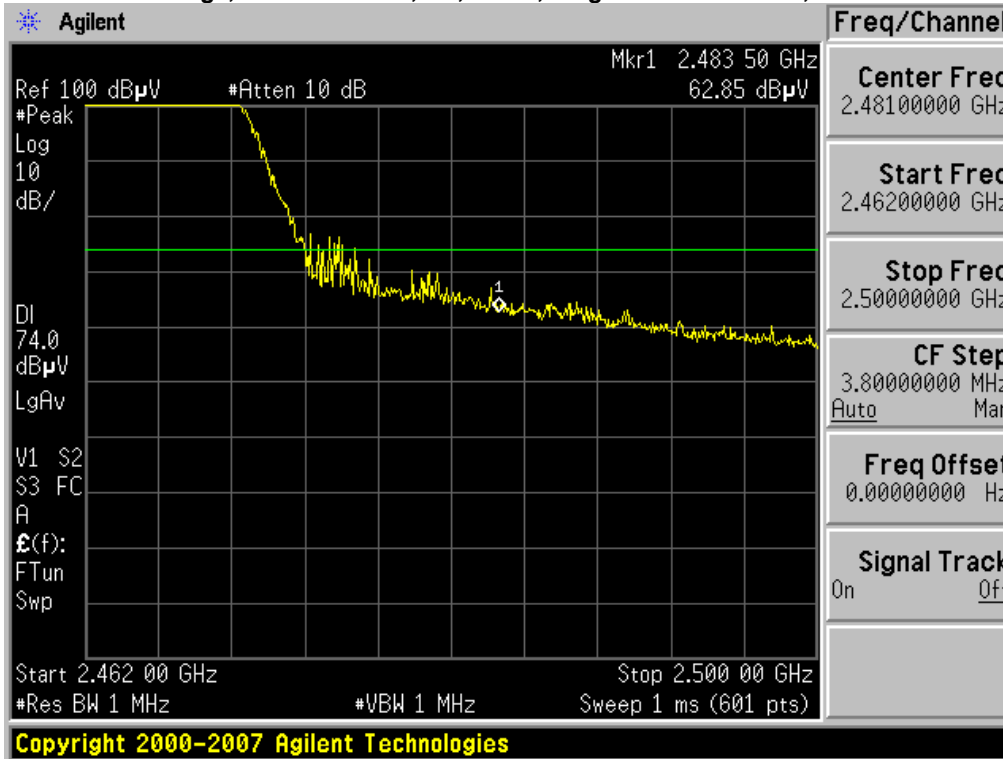

**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Peak**

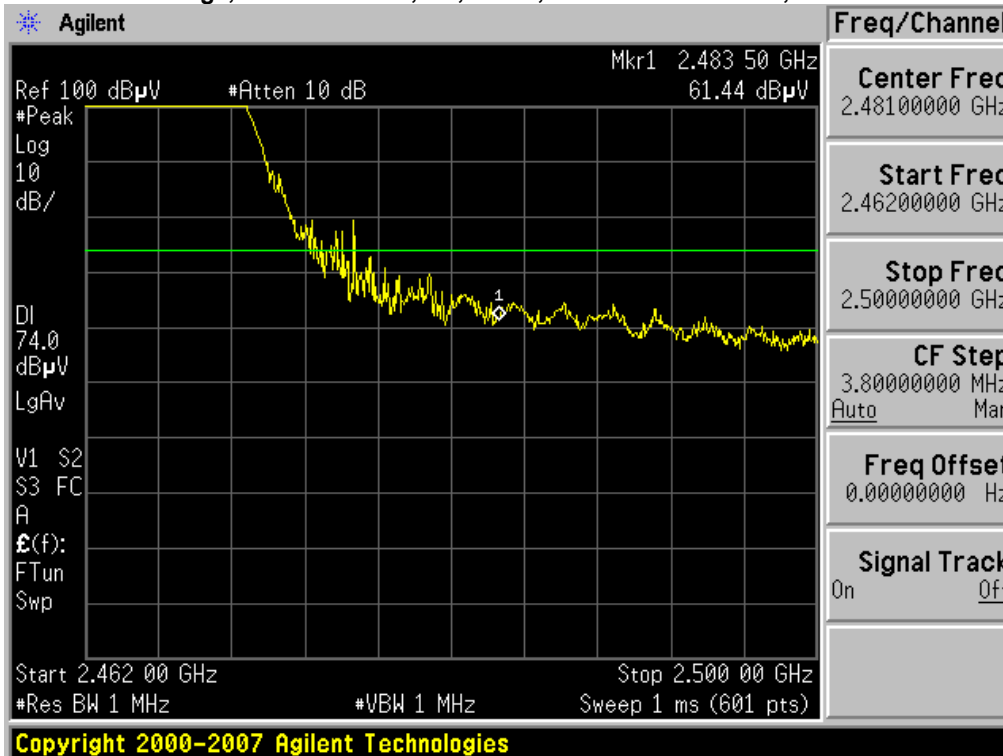






The following data reflects the worst-case emissions for all supported antennas from 6.1-13.5 dBi.


Frequency (MHz)	Mode	Data Rate (Mbps)	Target Total Transmit Power Level (dBm)	Radiated Band Edge Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	15	53.6	54	0.4
2412	Legacy CCK, Dual Tx Path	11	14	53.4	54	0.6
2412	Non HT-20, Single Tx Path	54	12	54.0	54	0.0
2412	Non HT-20, Dual Tx Path	54	11	52.8	54	1.2
2412	Non HT-20 Beam Forming	54	9	52.4	54	1.6
2462	Legacy CCK, Single Tx Path	11	14	52.8	54	1.2
2462	Legacy CCK, Dual Tx Path	11	14	53.0	54	1.0
2462	Non HT-20, Single Tx Path	54	12	53.6	54	0.4
2462	Non HT-20, Dual Tx Path	54	10	52.9	54	1.1
2462	Non HT-20 Beam Forming	54	7	52.9	54	1.1
2412/2432	Non HT-40 Duplicate, Single Tx Path	54	5	52.8	54	1.2
2412/2432	Non HT-40 Duplicate, Dual Tx Path	54	5	52.9	54	1.1
2412/2432	HT-40, Single Tx Path	M7	7	52.9	54	1.1
2412/2432	HT-40, Dual Tx Path	M7	8	52.9	54	1.1
2442/2462	Non HT-40 Duplicate, Single Tx Path	54	5	52.4	54	1.6
2442/2462	Non HT-40 Duplicate, Dual Tx Path	54	5	54.0	54	0.0
2442/2462	HT-40, Single Tx Path	M7	7	53.0	54	1.0
2442/2462	HT-40, Dual Tx Path	M7	8	53.1	54	0.9



**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

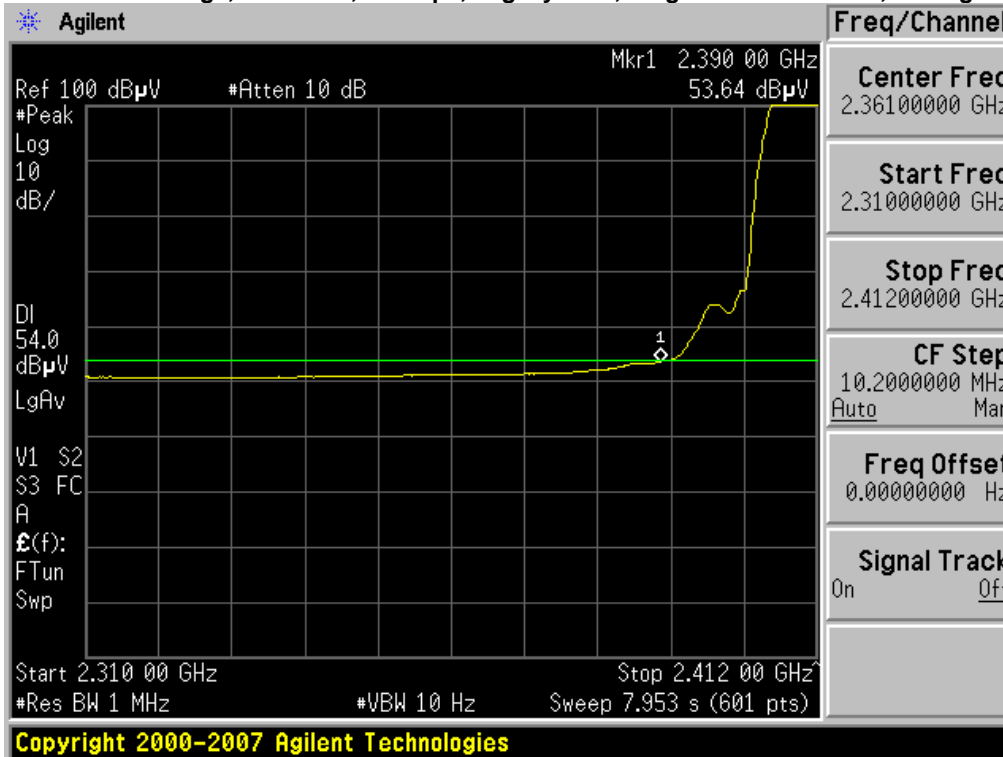


**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

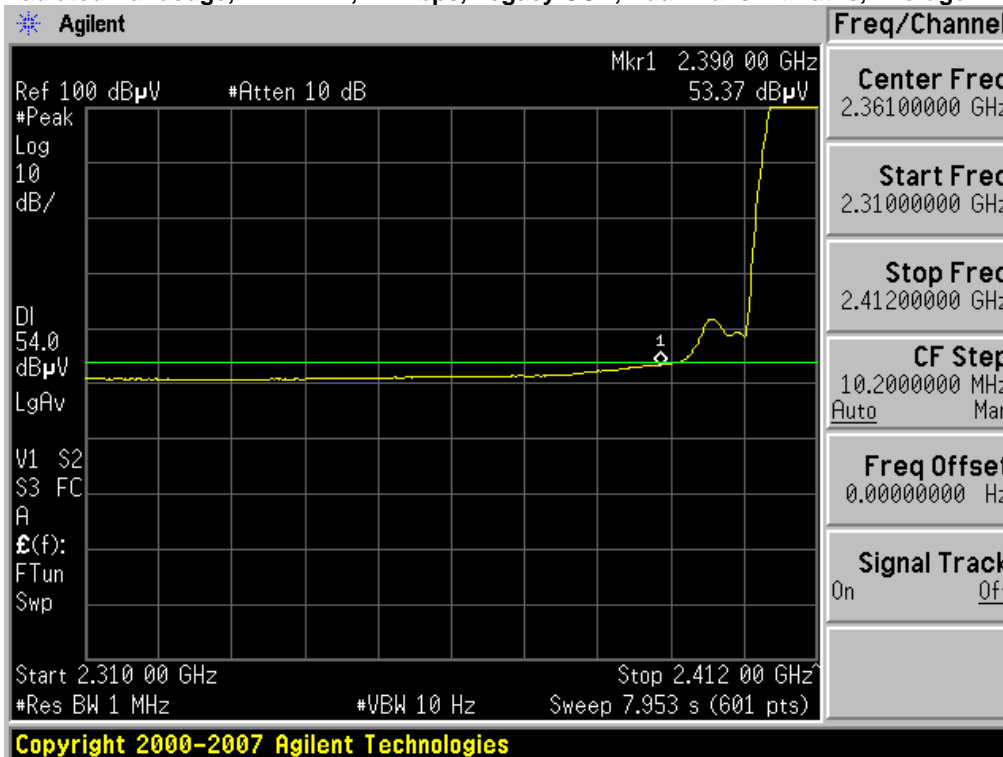




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Average**

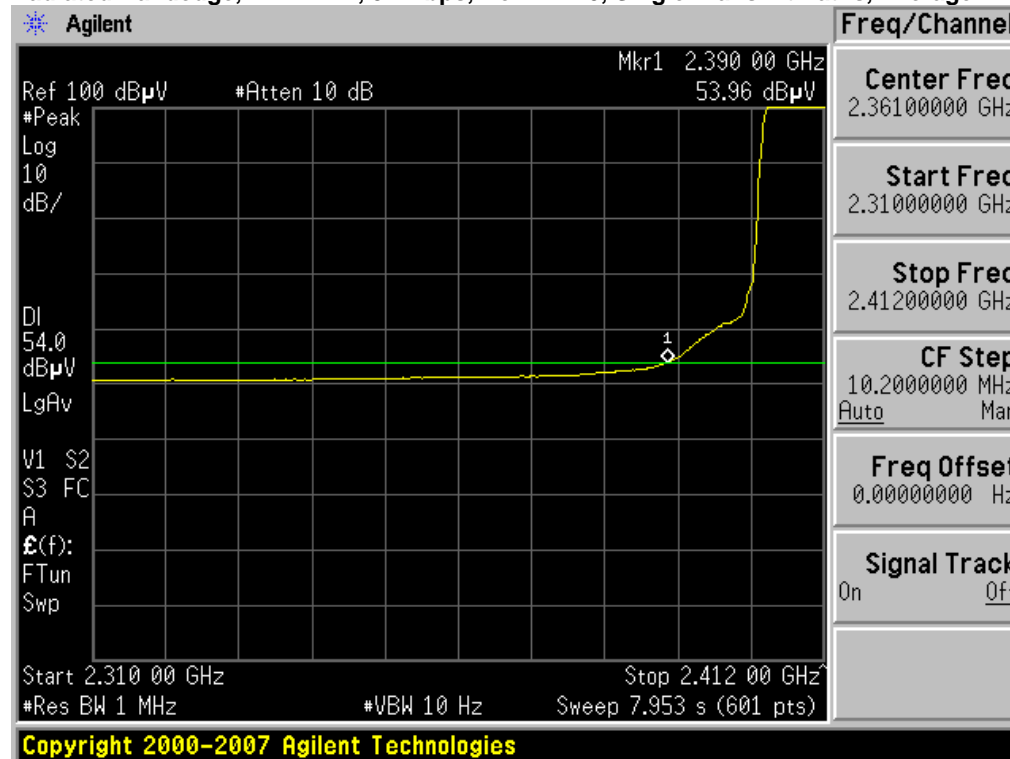


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average**

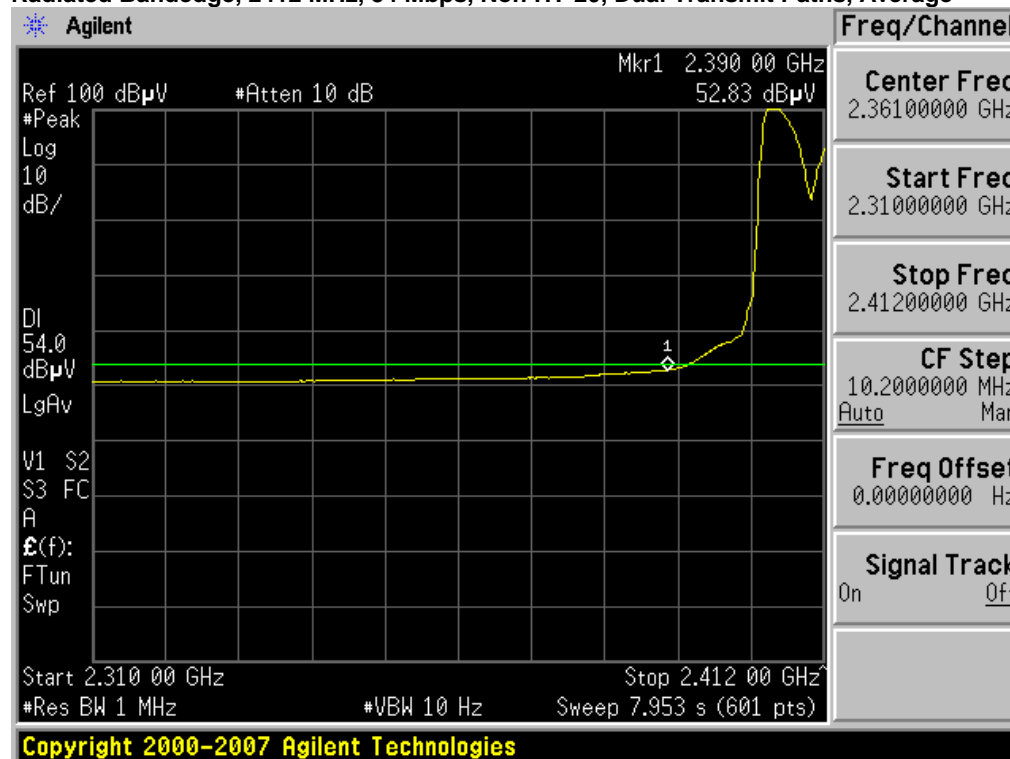




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average**

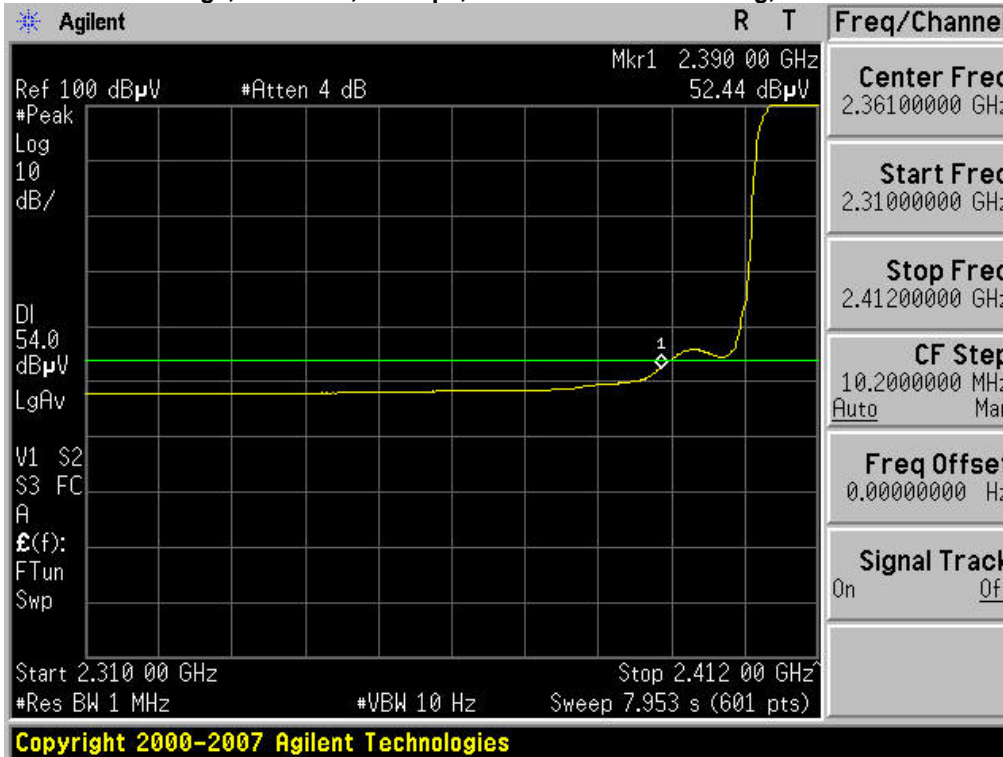


**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**

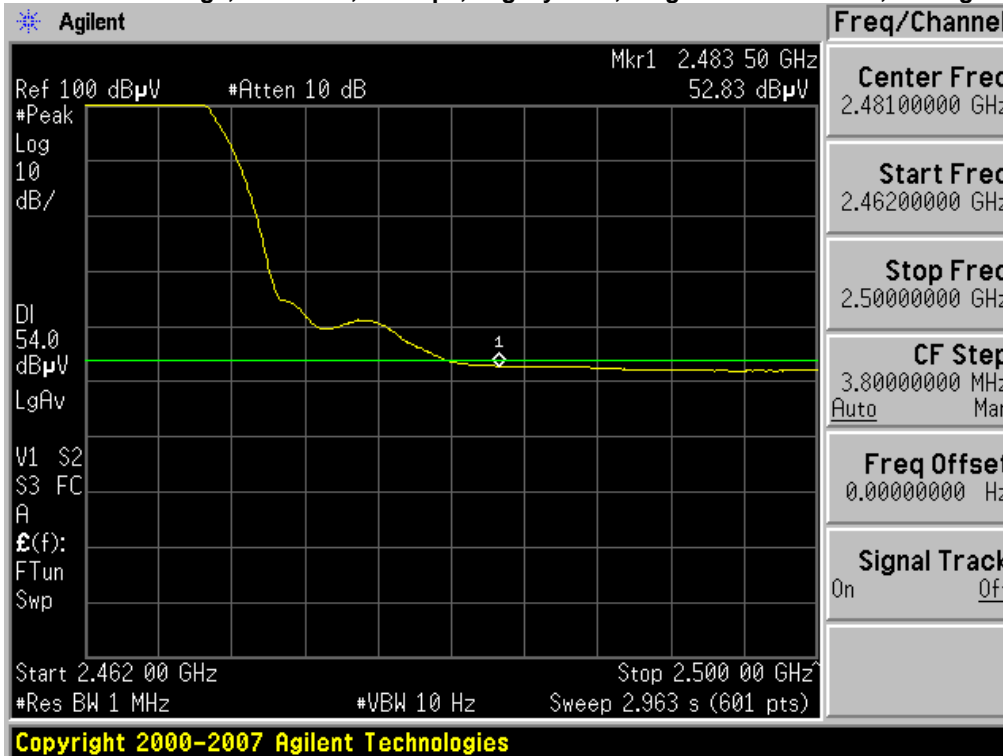




**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

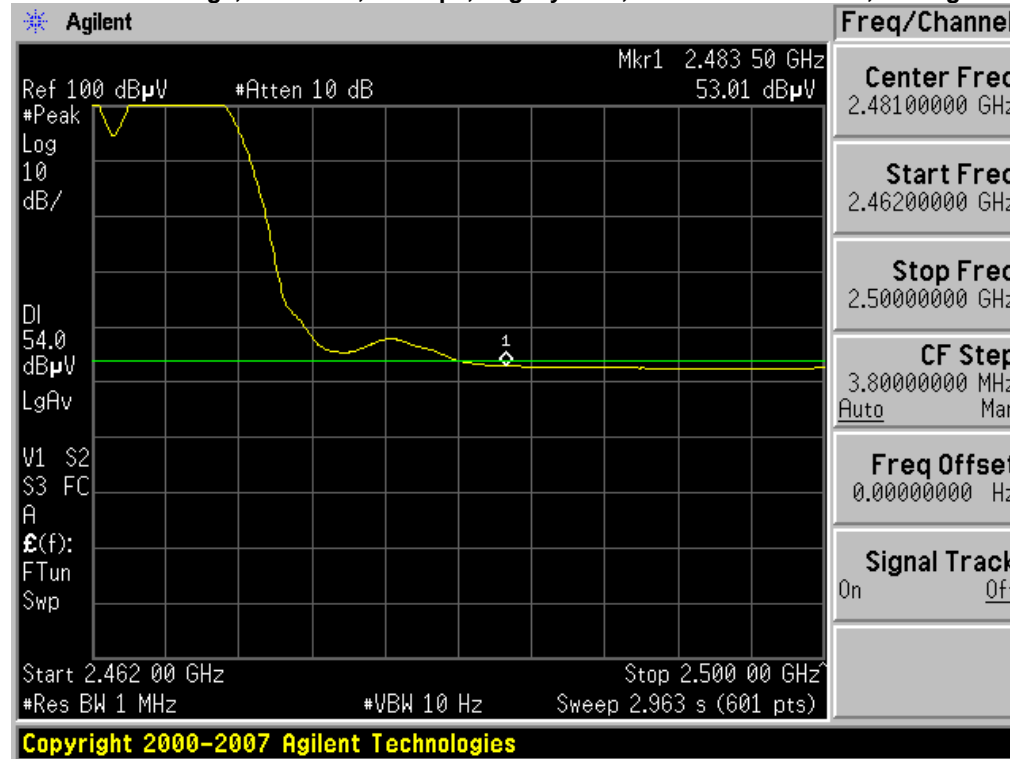


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Average**

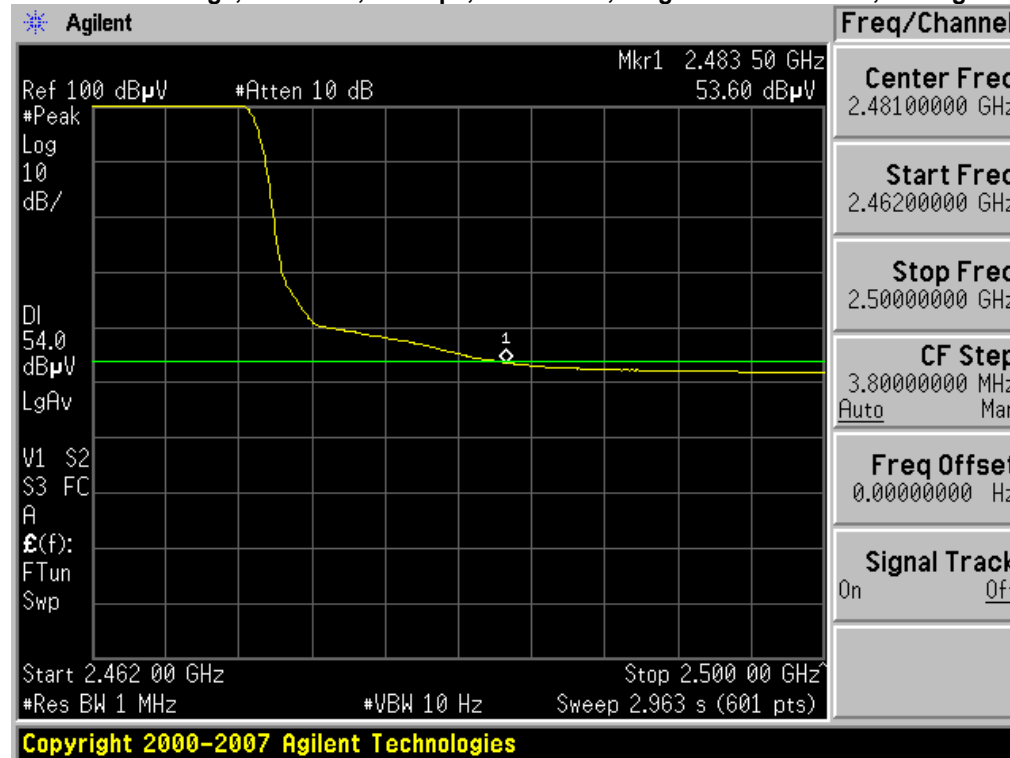




Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average

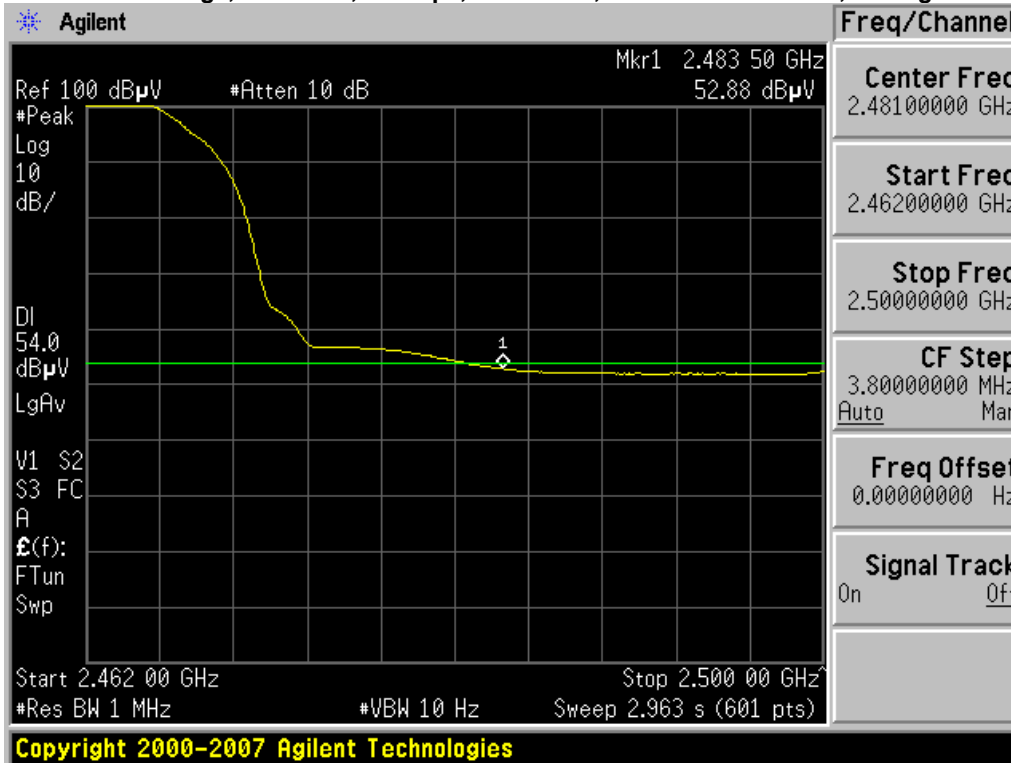


Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average

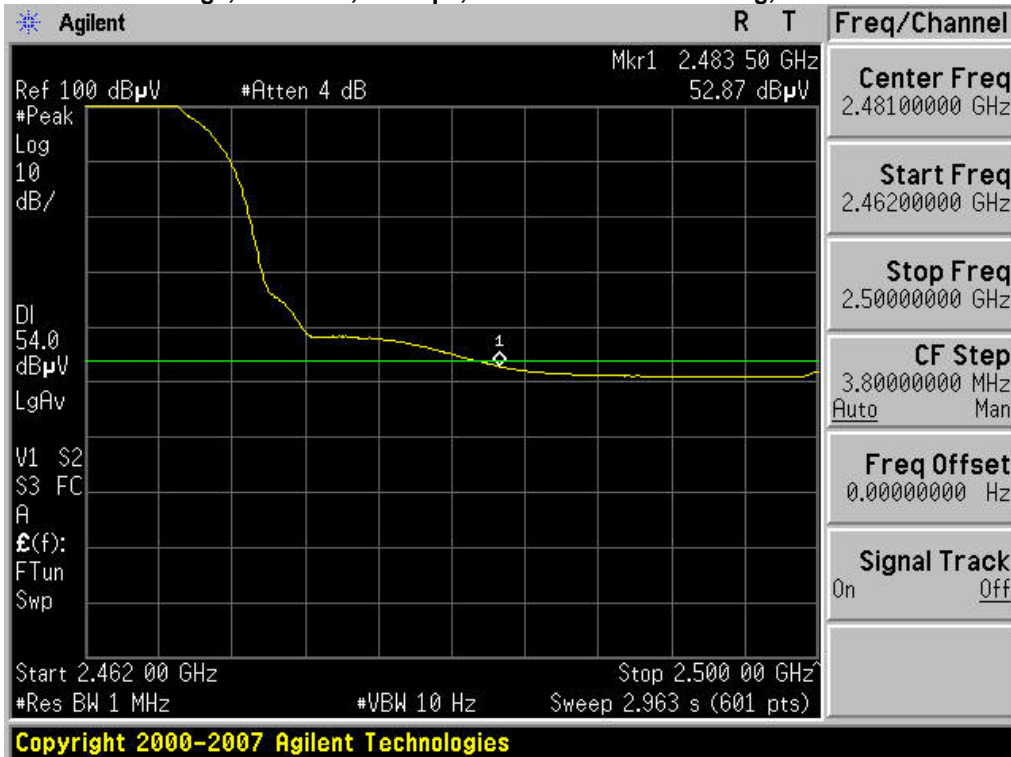




**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average**

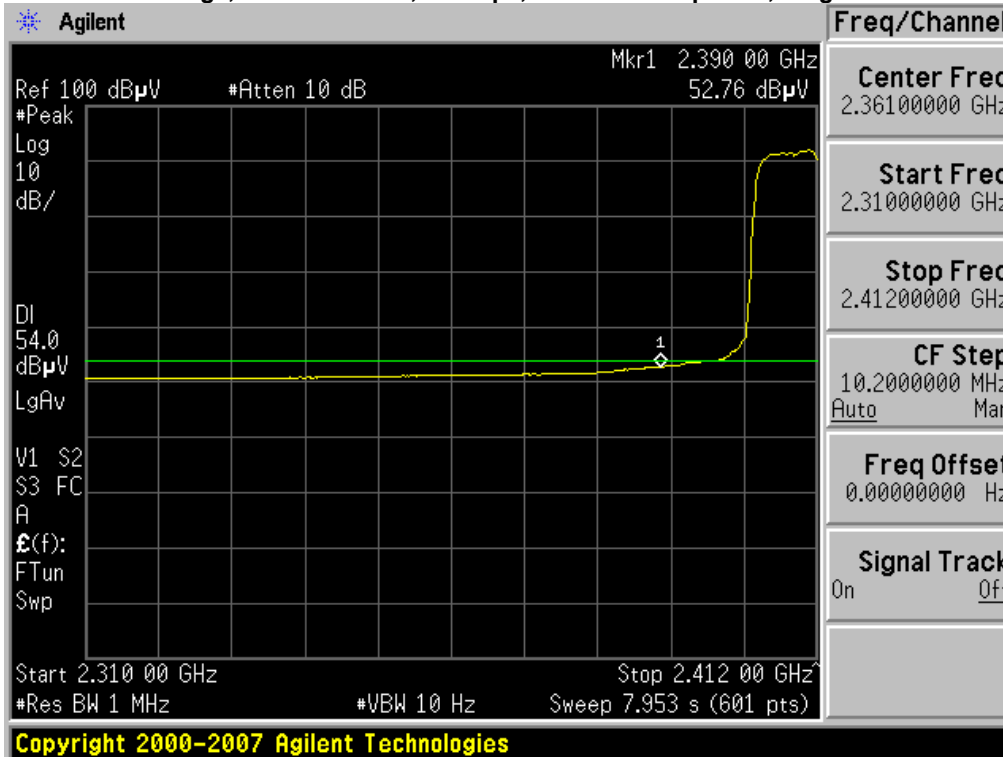


**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

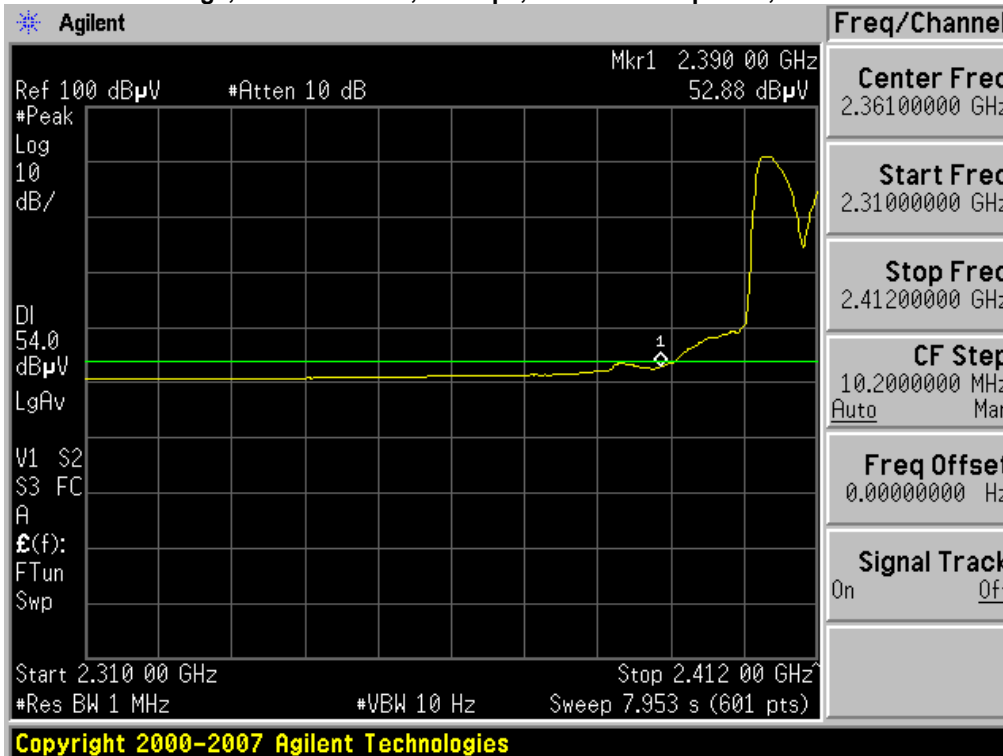




**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Average**

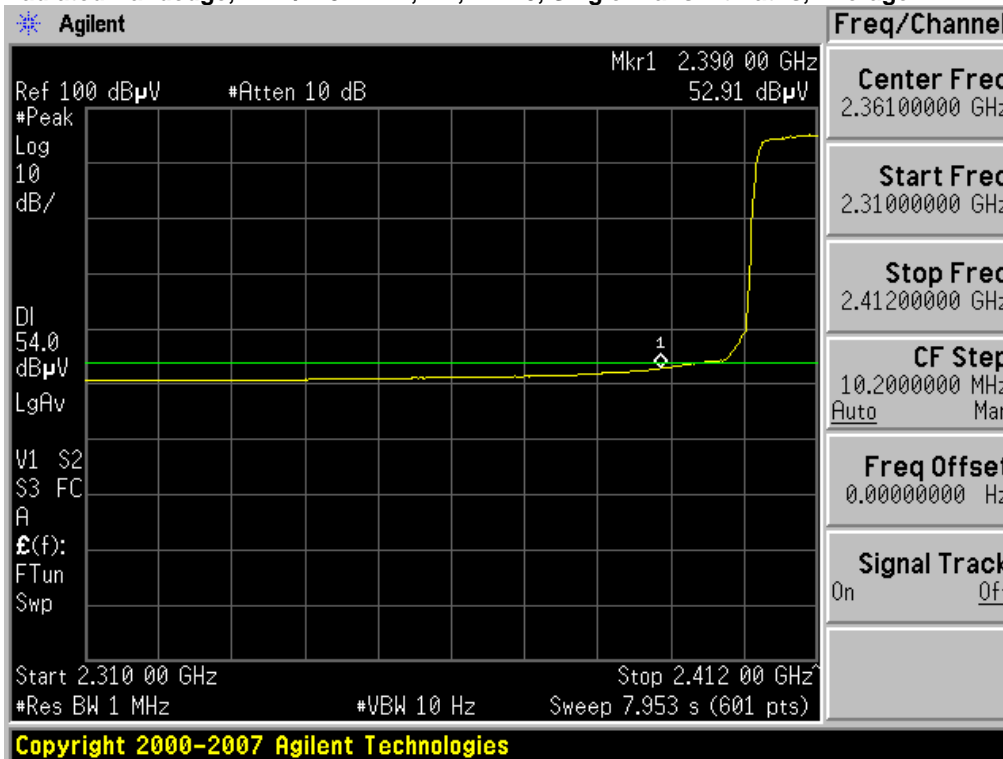


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Average**

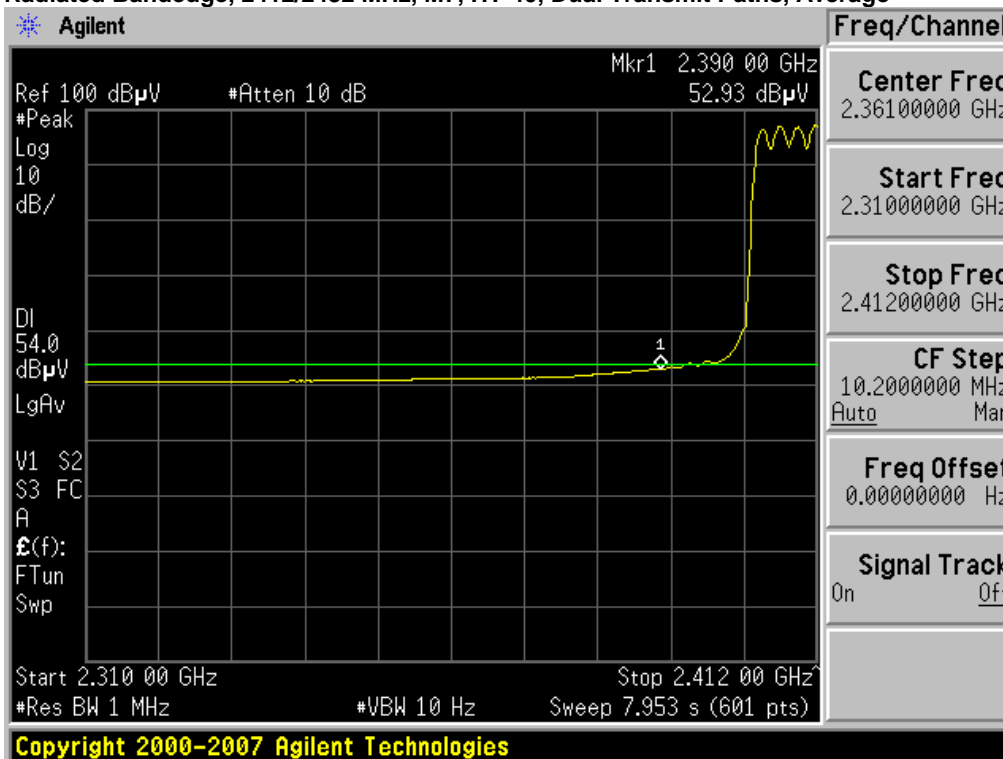






**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average**

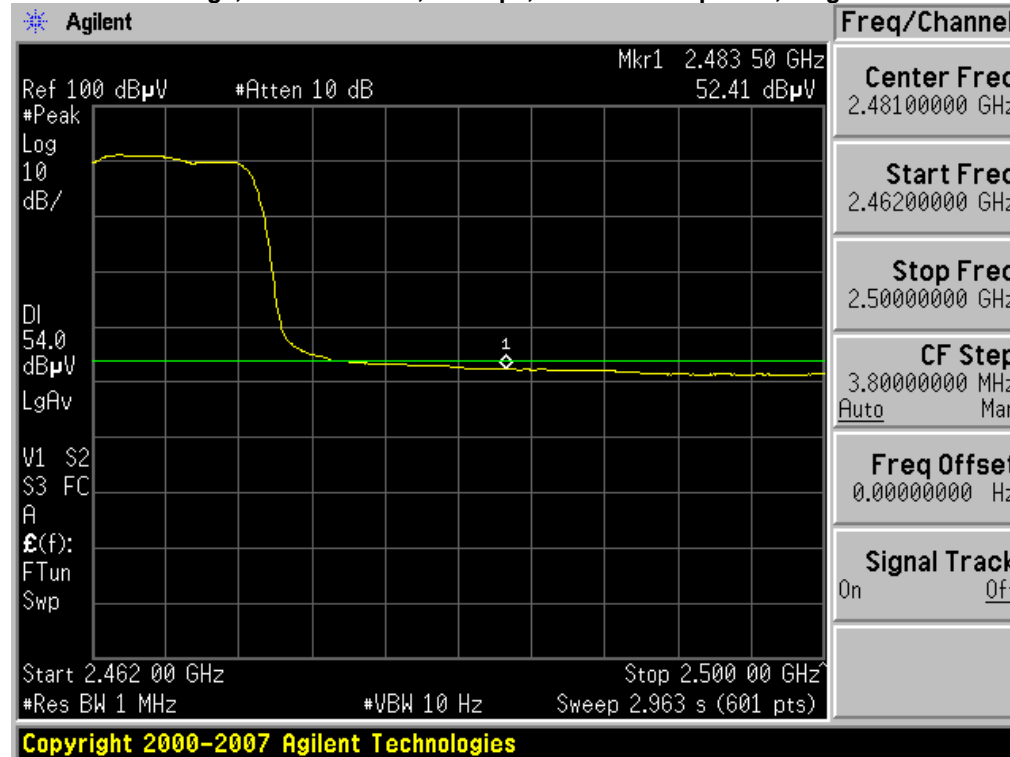


**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

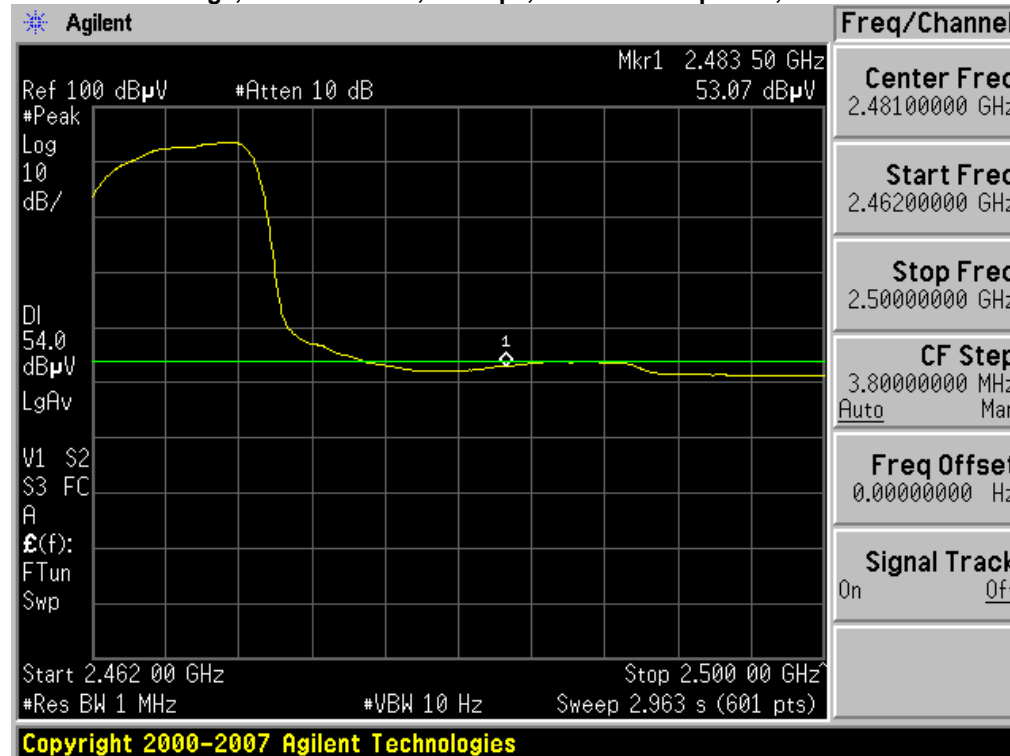




**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Average**

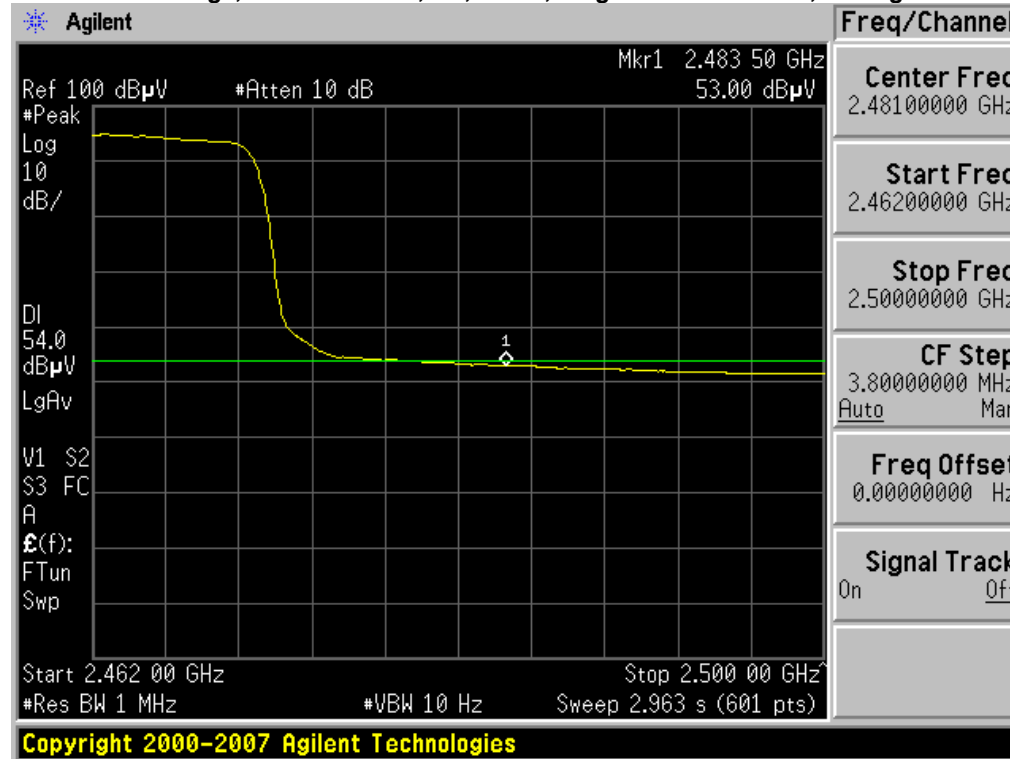

**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Average**

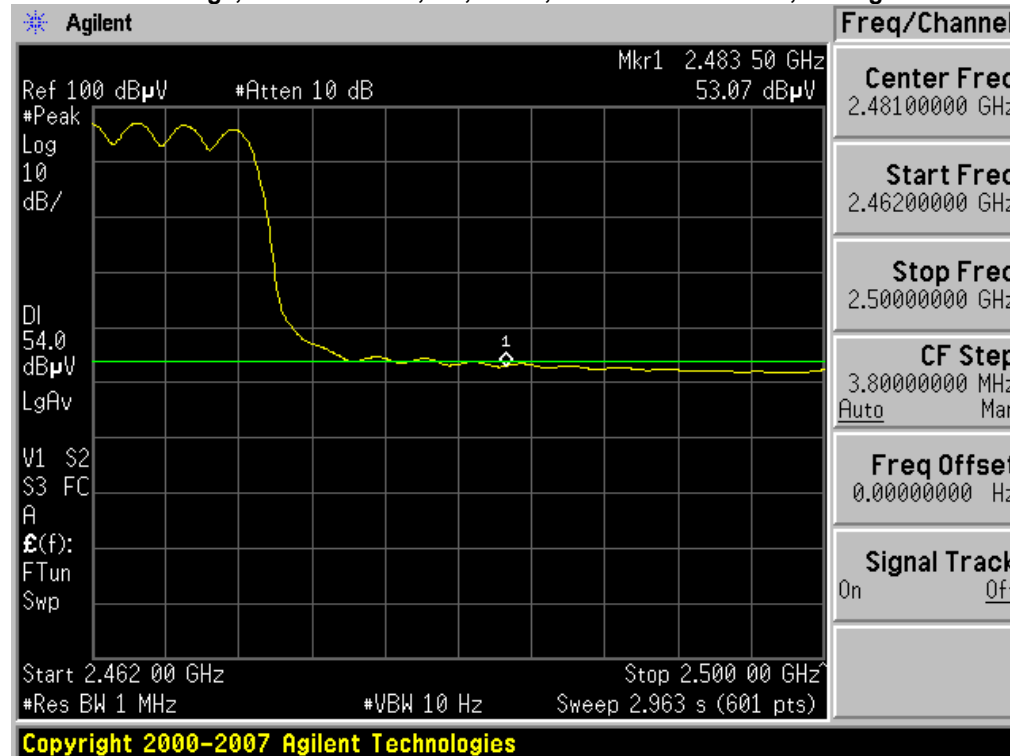




**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**




**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

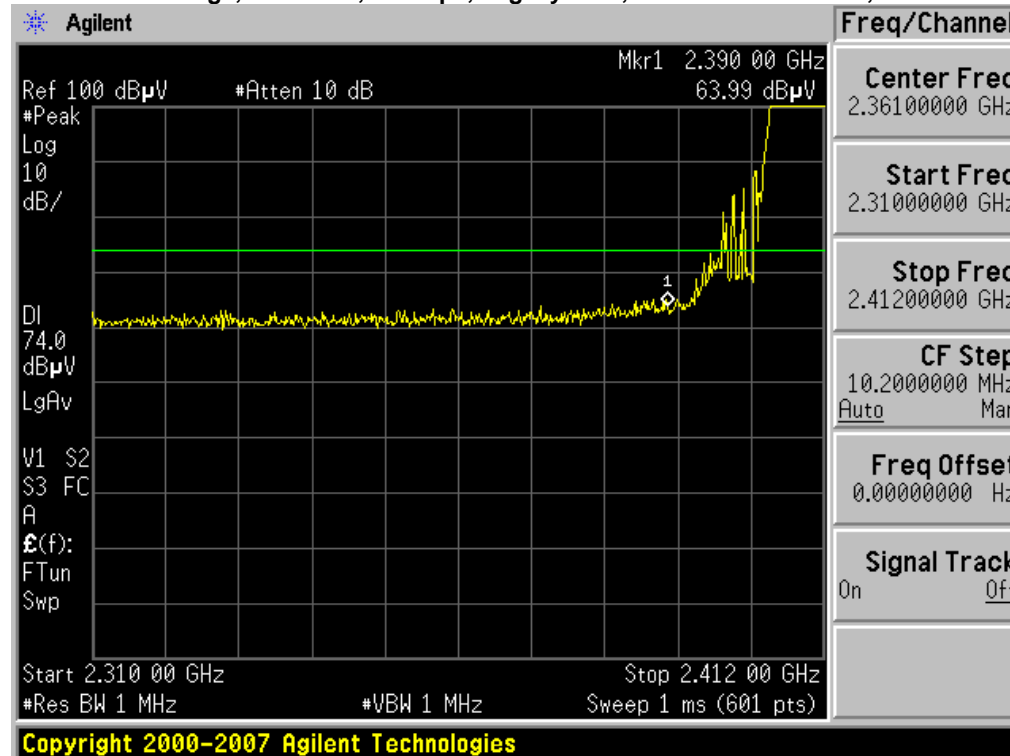




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Single Transmit Paths, Peak**

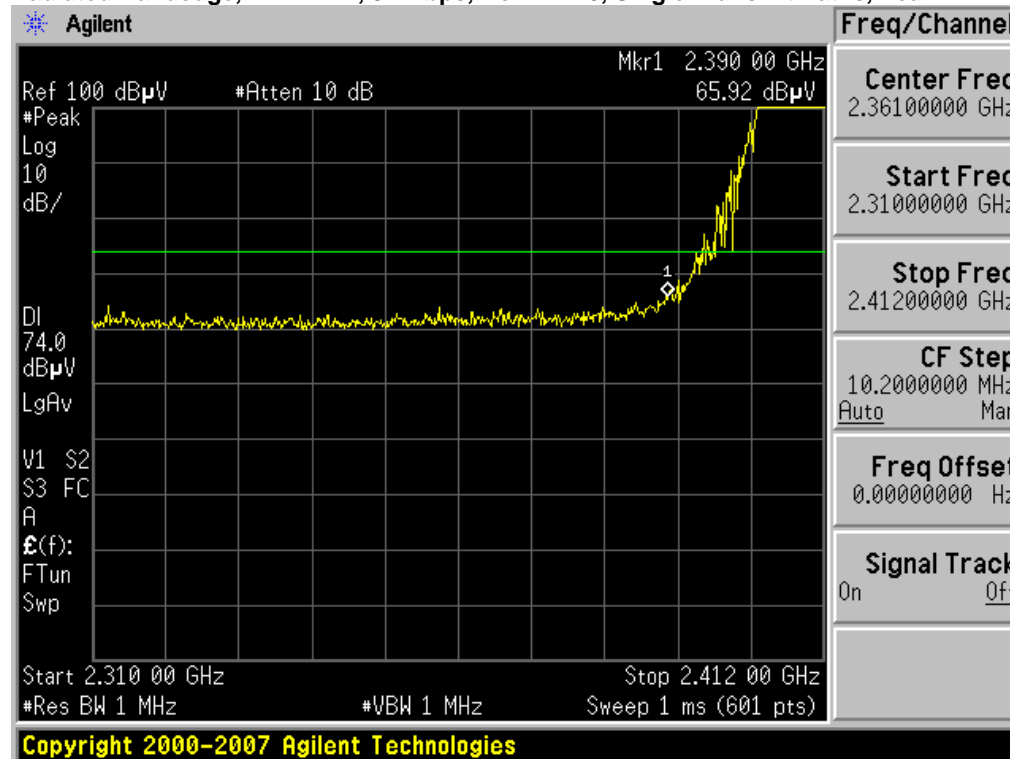


**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**

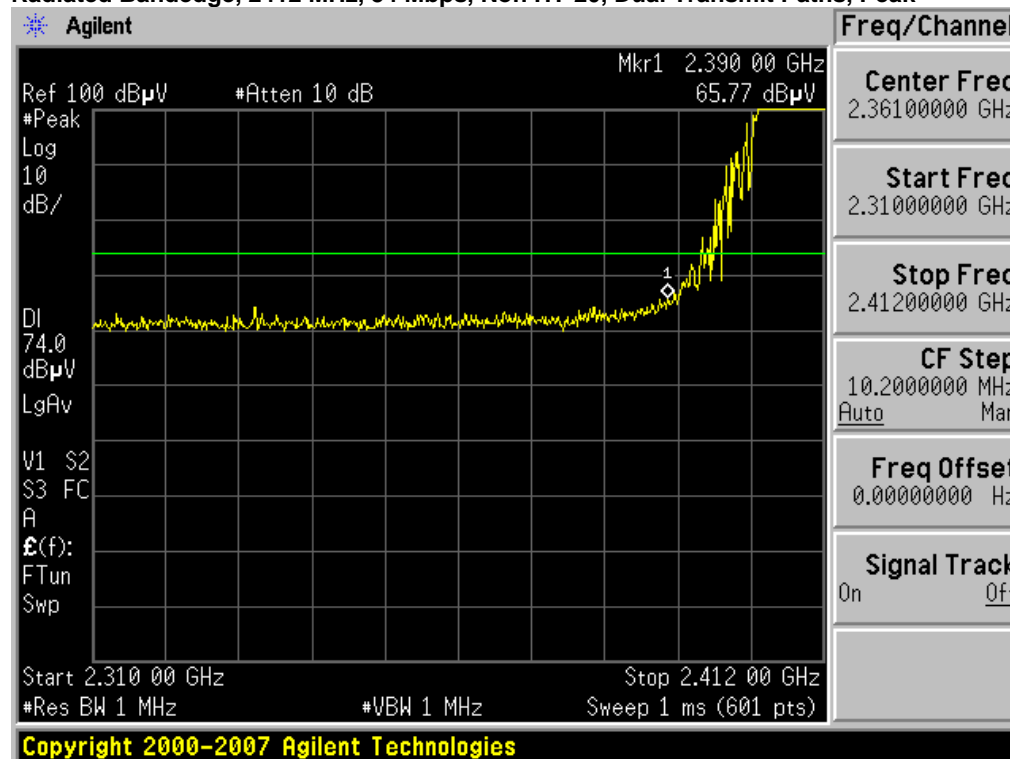




**Radiated Bandedge, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

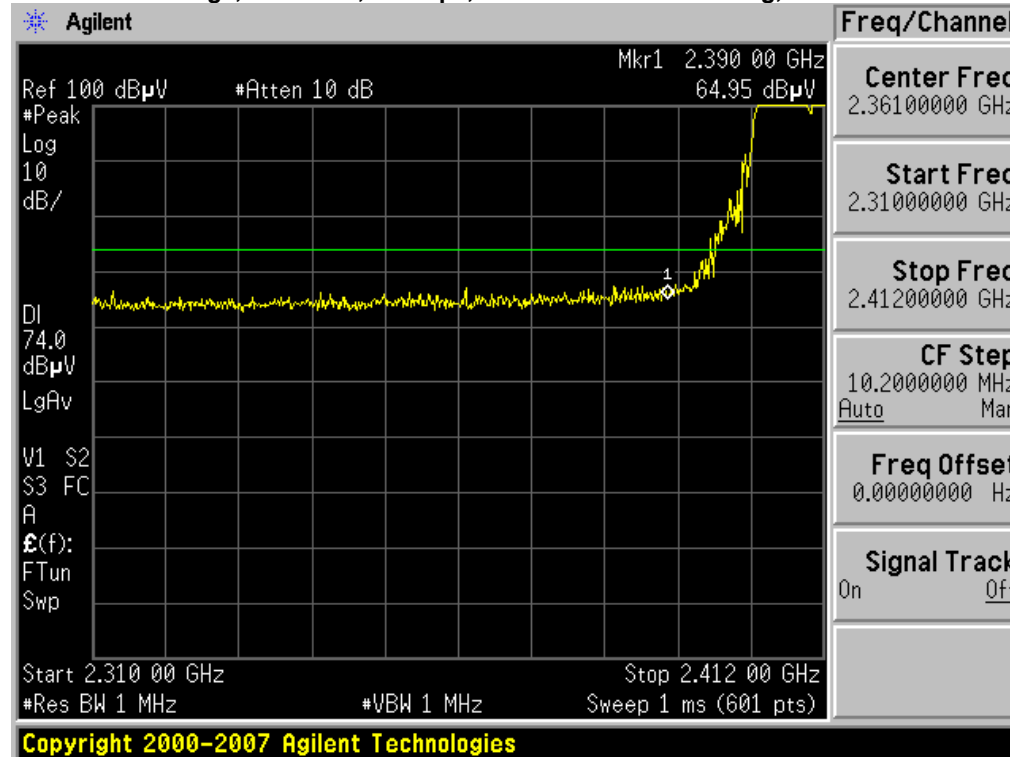


**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak**

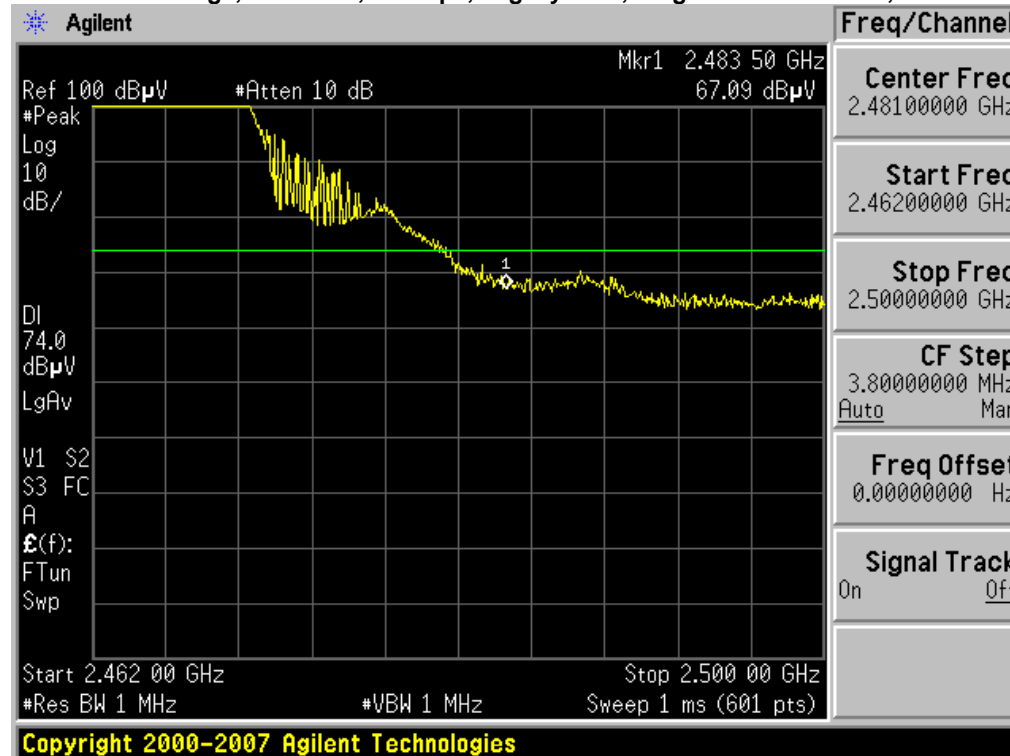




**Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

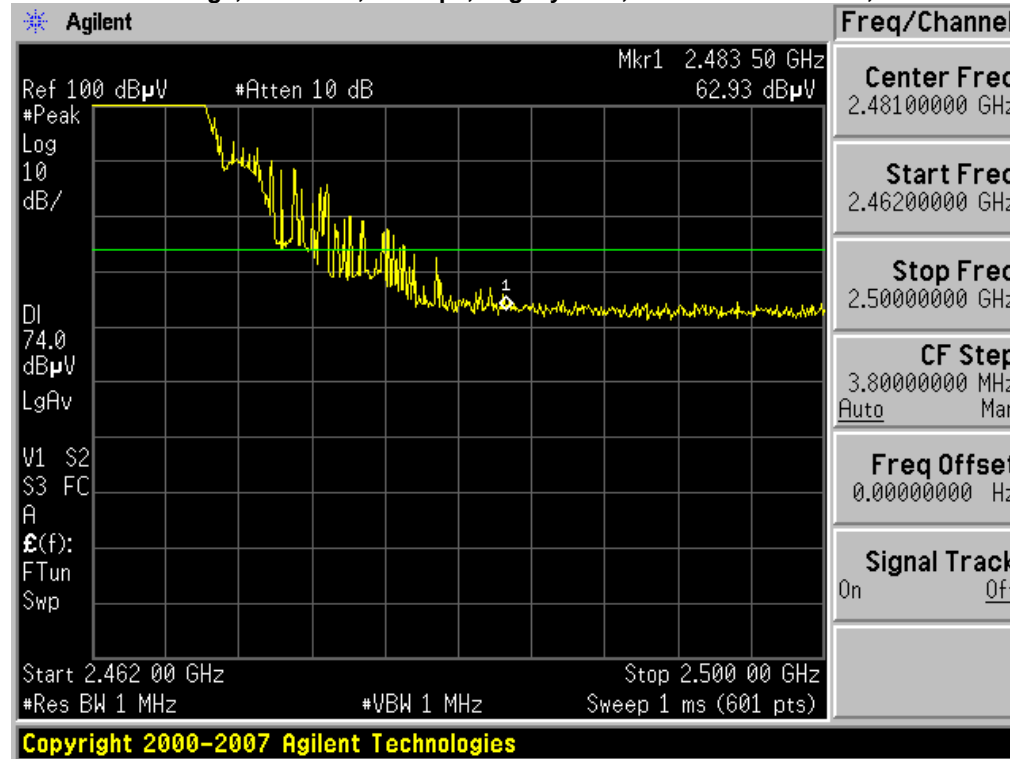


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 , Single Transmit Paths, Peak**

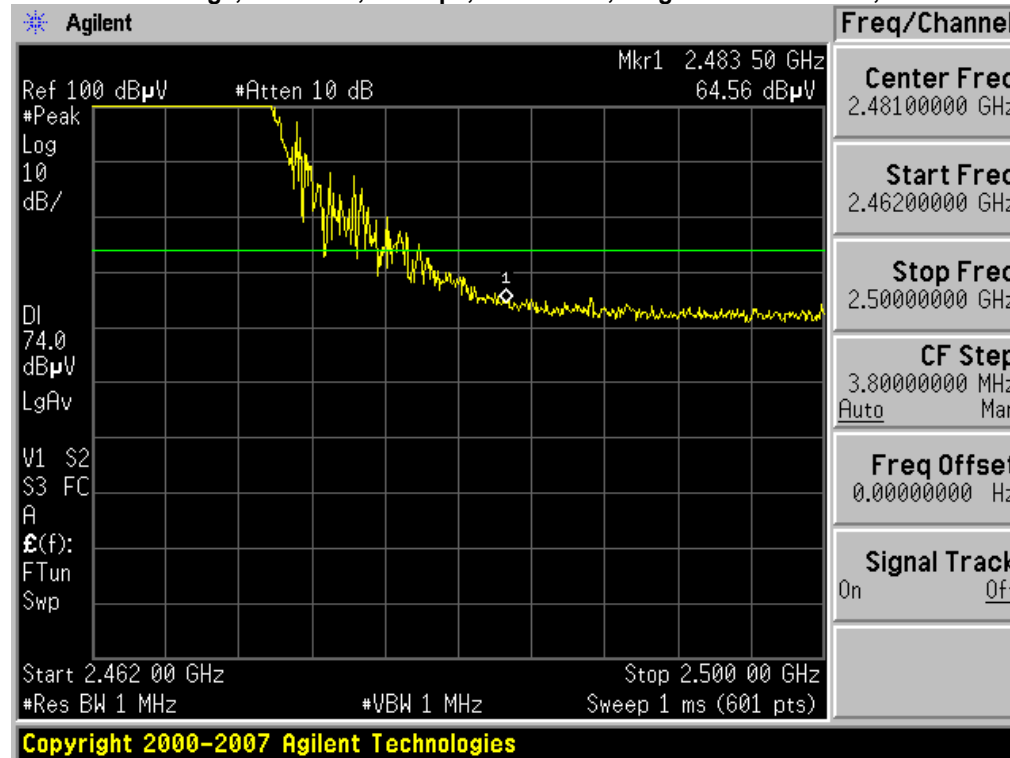




**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Peak**

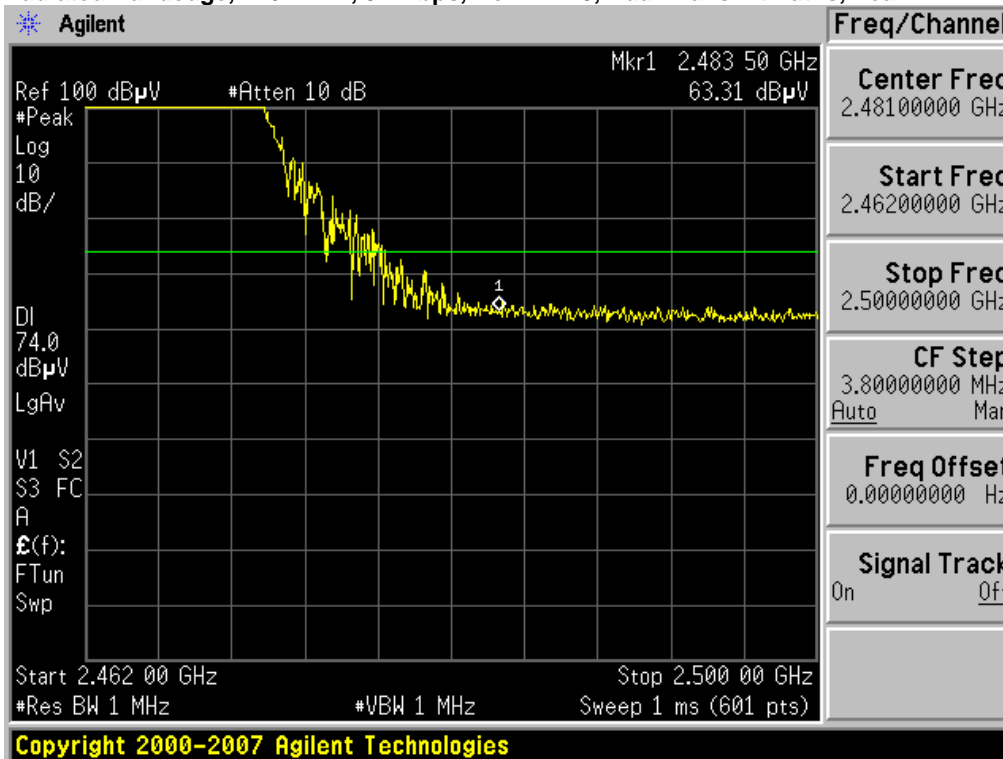


**Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak**

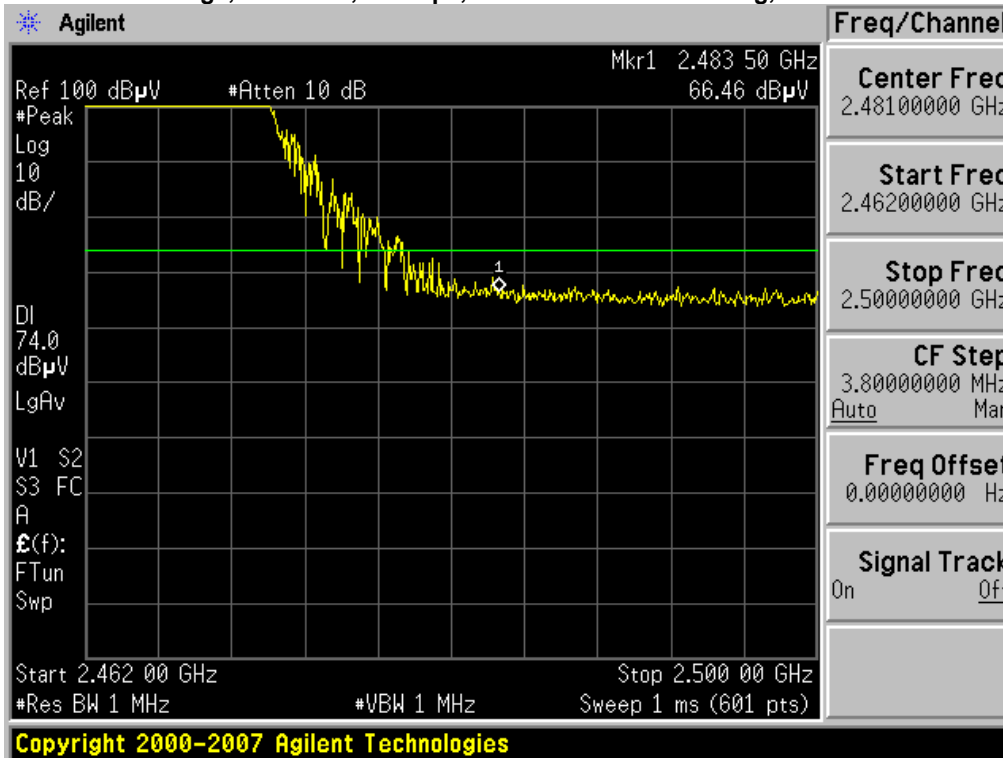




**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

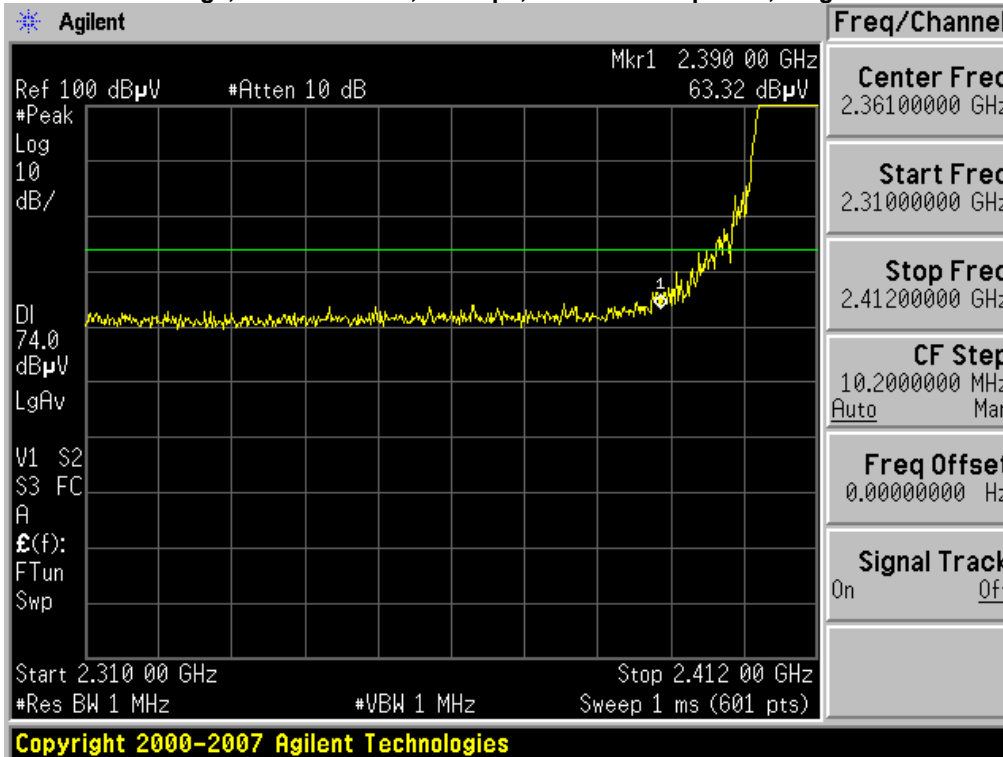


**Radiated Bandedge, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

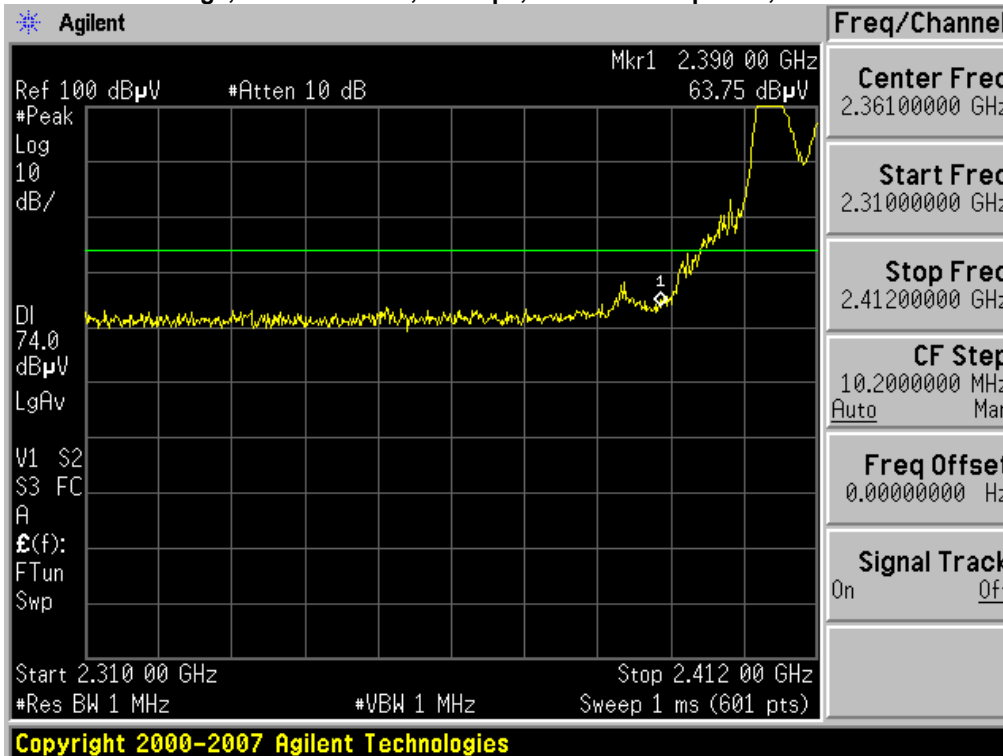






**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Single Transmit Paths, Peak**

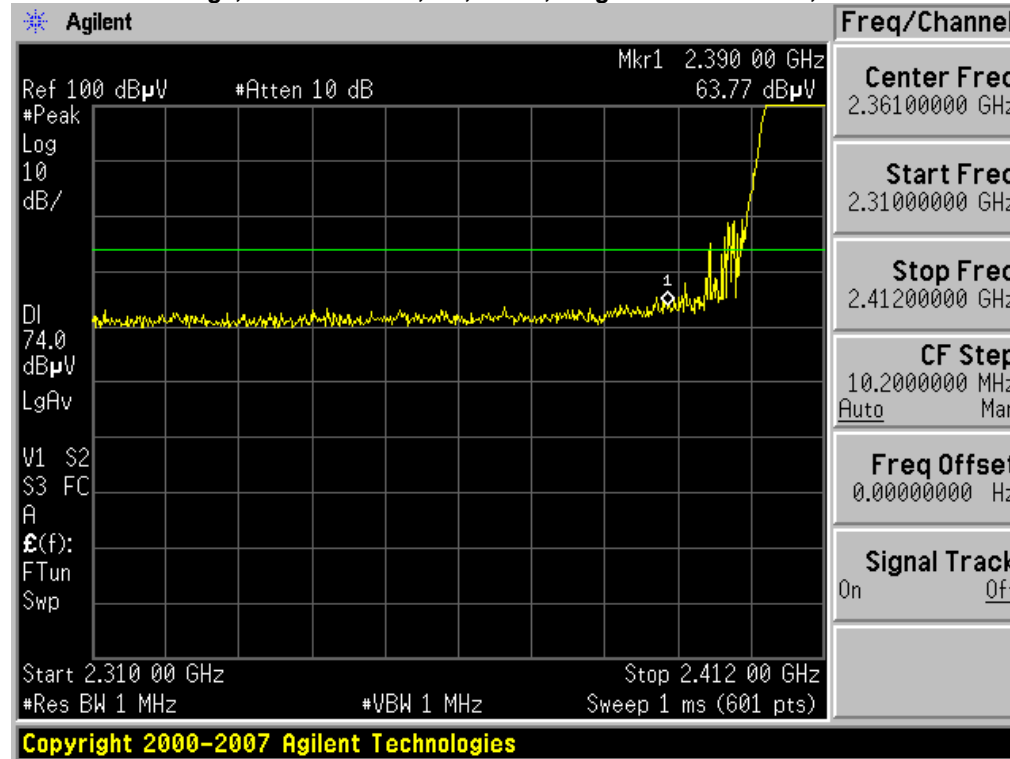


**Radiated Bandedge, 2412/2432 MHz, M7, HT-40, Dual Transmit Paths, Peak**

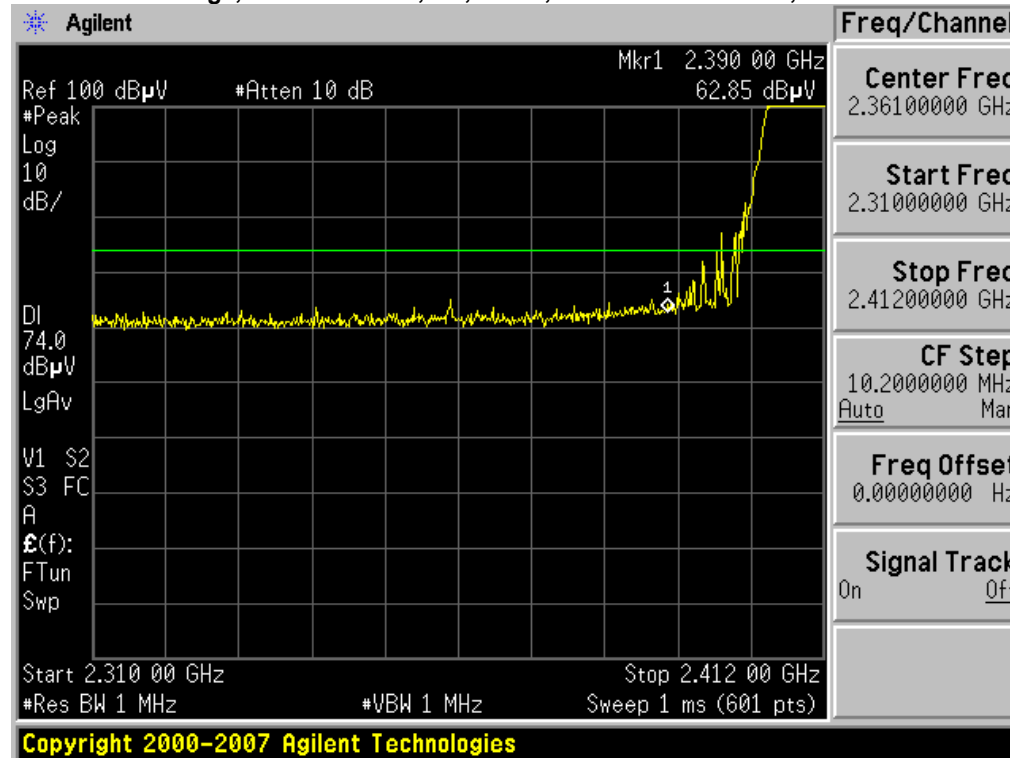




**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak**

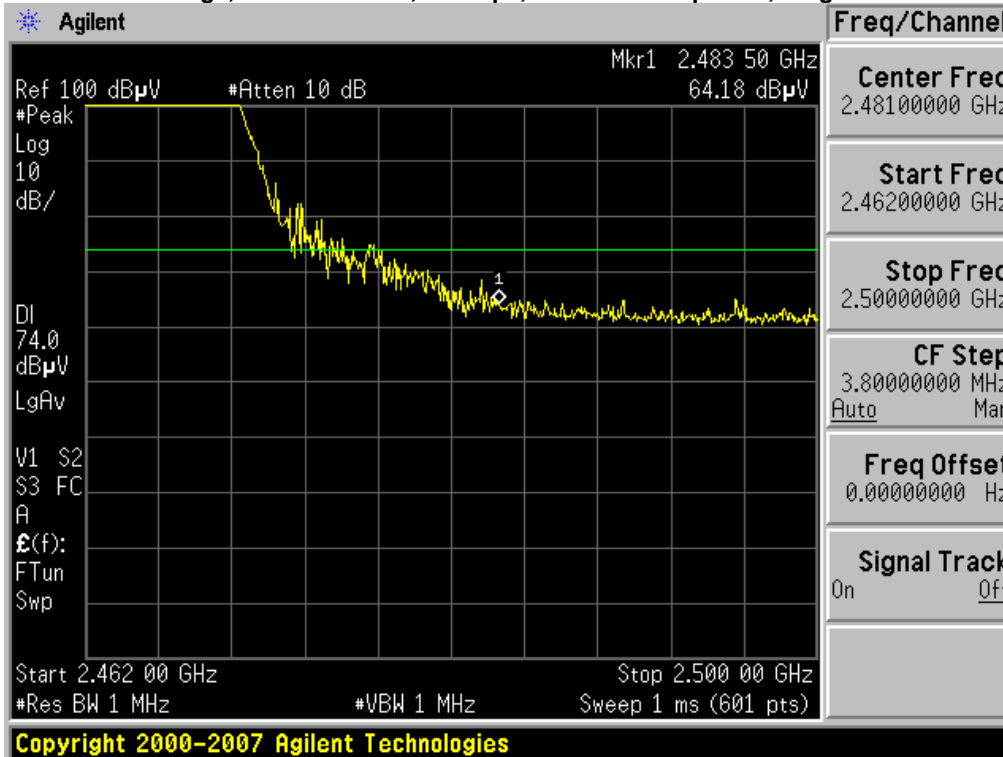


**Radiated Bandedge, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

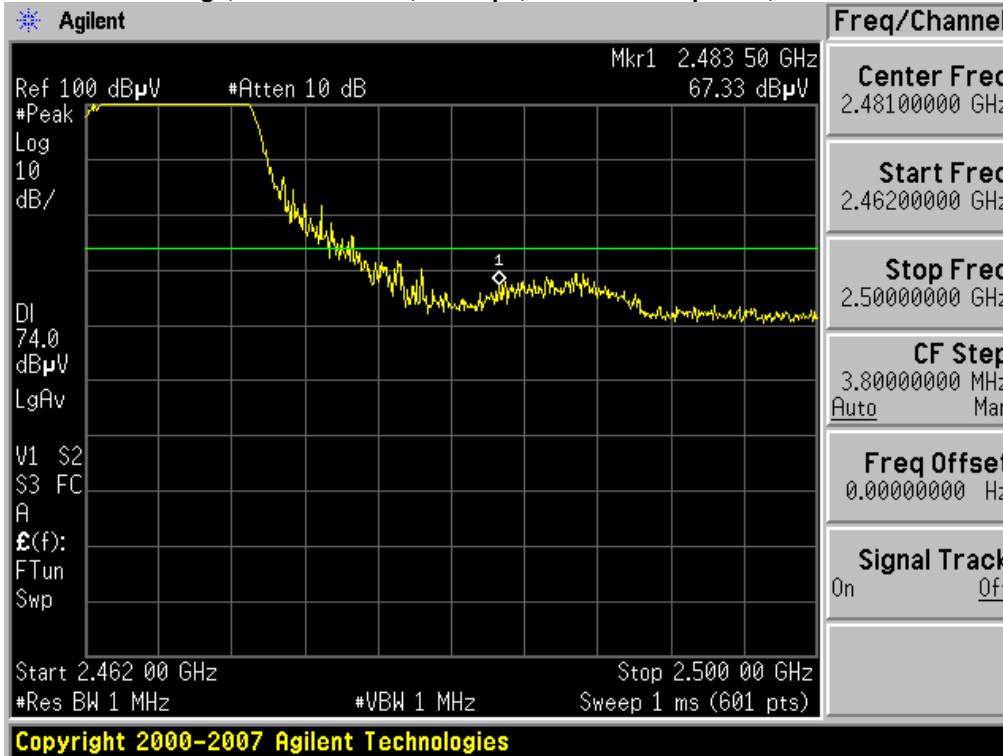




**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Single Transmit Paths, Peak**

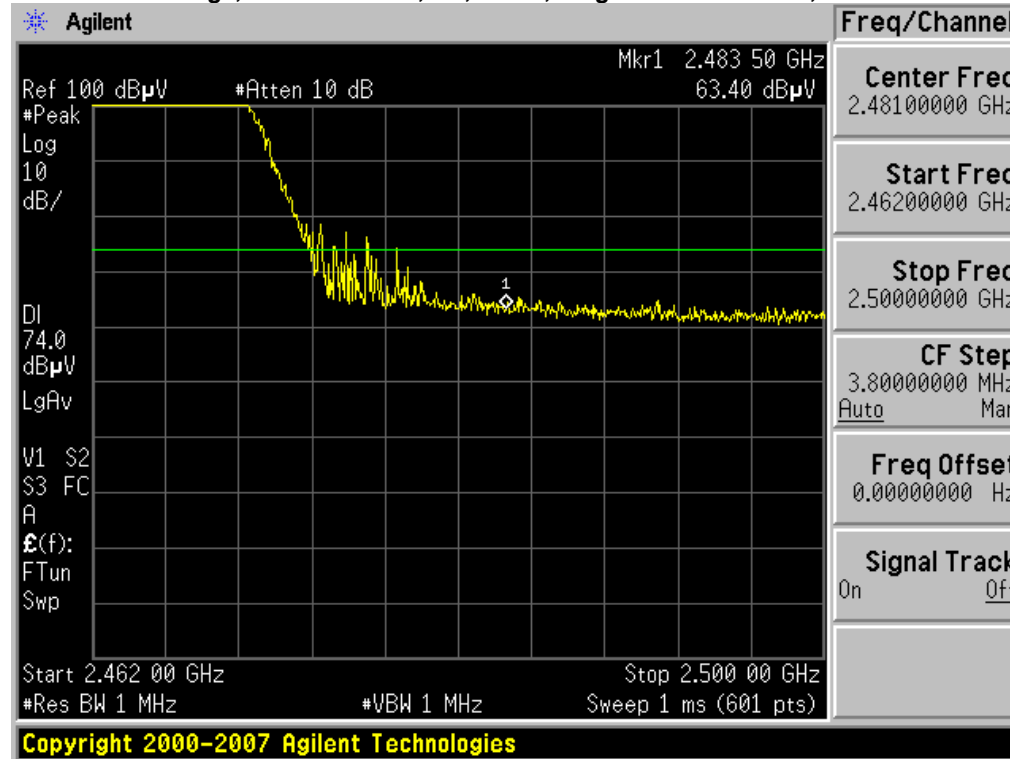

**Radiated Bandedge, 2442/2462 MHz, M7, HT-40, Dual Transmit Paths, Peak**

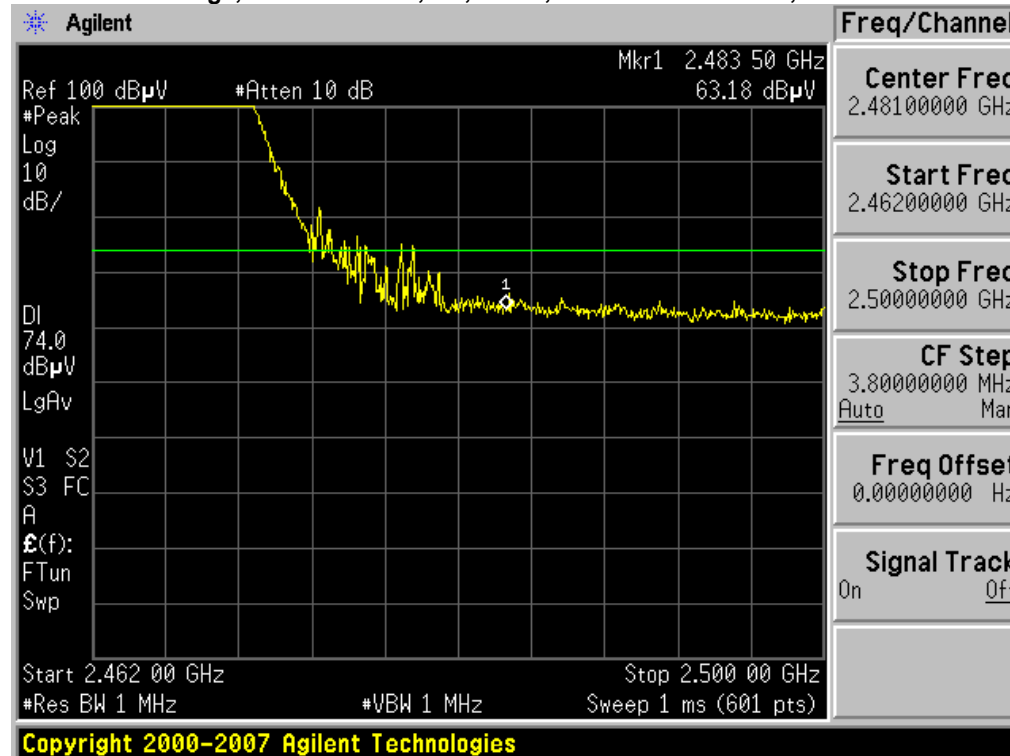



## Radiated Spurious Emissions

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 1GHz – 18 GHz  
 Reference Level: 80 dBuV  
 Attenuation: 10 dB  
 Sweep Time: Coupled  
 Resolution Bandwidth: 1MHz  
 Video Bandwidth: 1 MHz for peak, 10 Hz for average  
 Detector: Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m  
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The following data reflects the worst-case emissions for all supported antennas.

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Non HT-20 Beam Forming	54	42.6	54	11.5
2437	Legacy CCK, Dual Tx Path	11	41.3	54	12.7
2437	Non HT-20, Beam Forming	54	41.0	54	13.0
2462	Legacy CCK, Dual Tx Path	11	51.2	54	2.8
2462	Non HT-20 Beam Forming	54	42.5	54	11.5
2412/2432	Non HT-40, Dual Tx Path	54	40.8	54	13.2
2427/2447	Non HT-40, Dual Tx Path	54	40.7	54	13.4
2442/2462	Non HT-40, Dual Tx Path	54	40.7	54	13.3



**Radiated Spurious Emissions, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Average**



**Radiated Spurious Emissions, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**






**Radiated Spurious Emissions, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Average**



**Radiated Spurious Emissions, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**

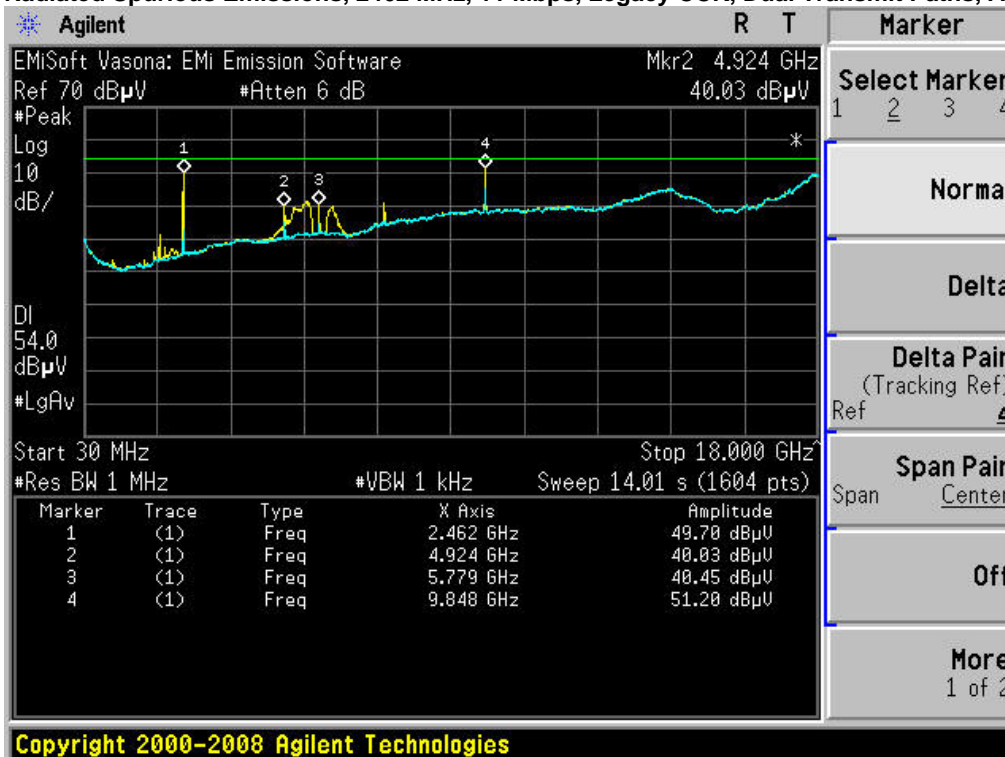




**Radiated Spurious Emissions, 2462 MHz, 54 Mbps, Non HT-20 , Beam Forming, Average**



**Radiated Spurious Emissions, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

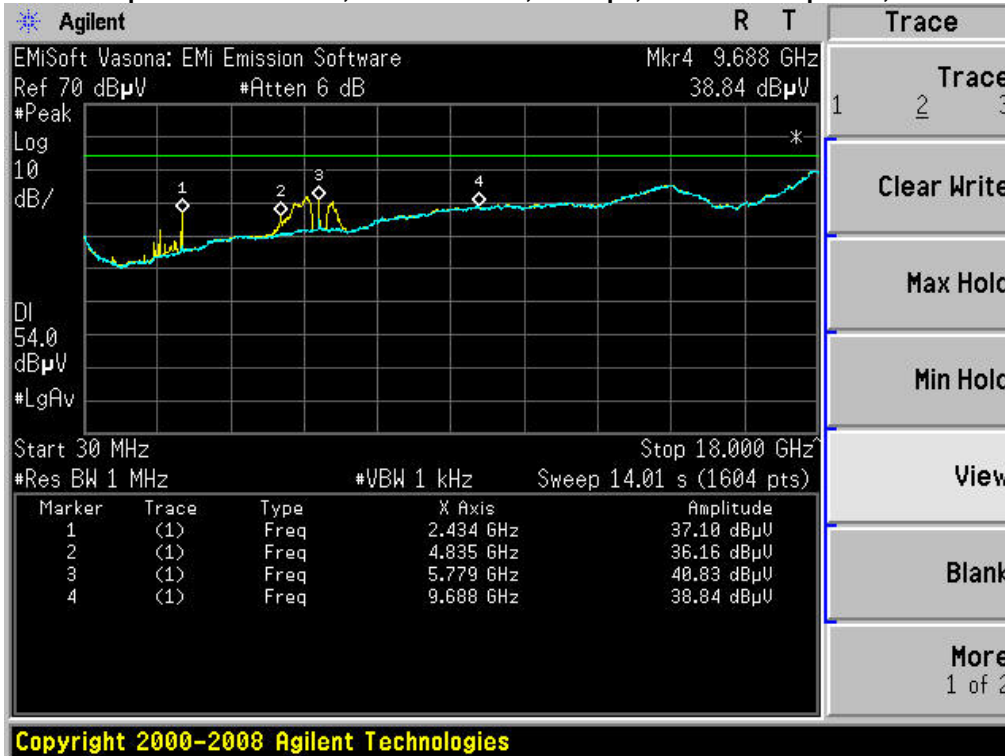






**Radiated Spurious Emissions, 2427/2447 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**




**Radiated Spurious Emissions, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

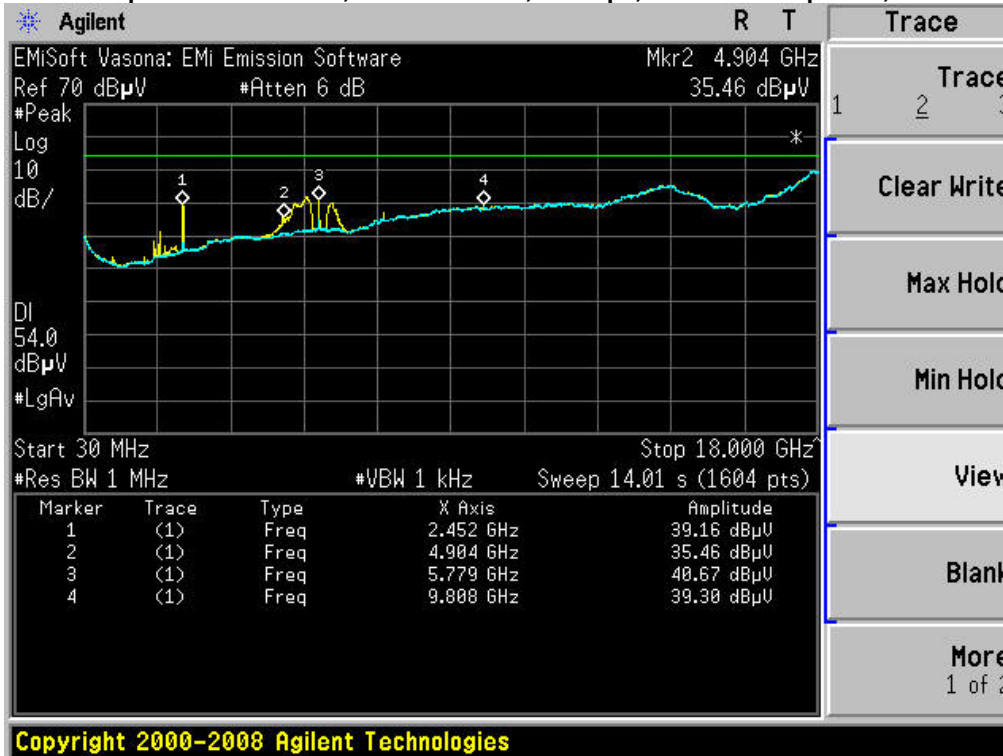






**Radiated Spurious Emissions, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

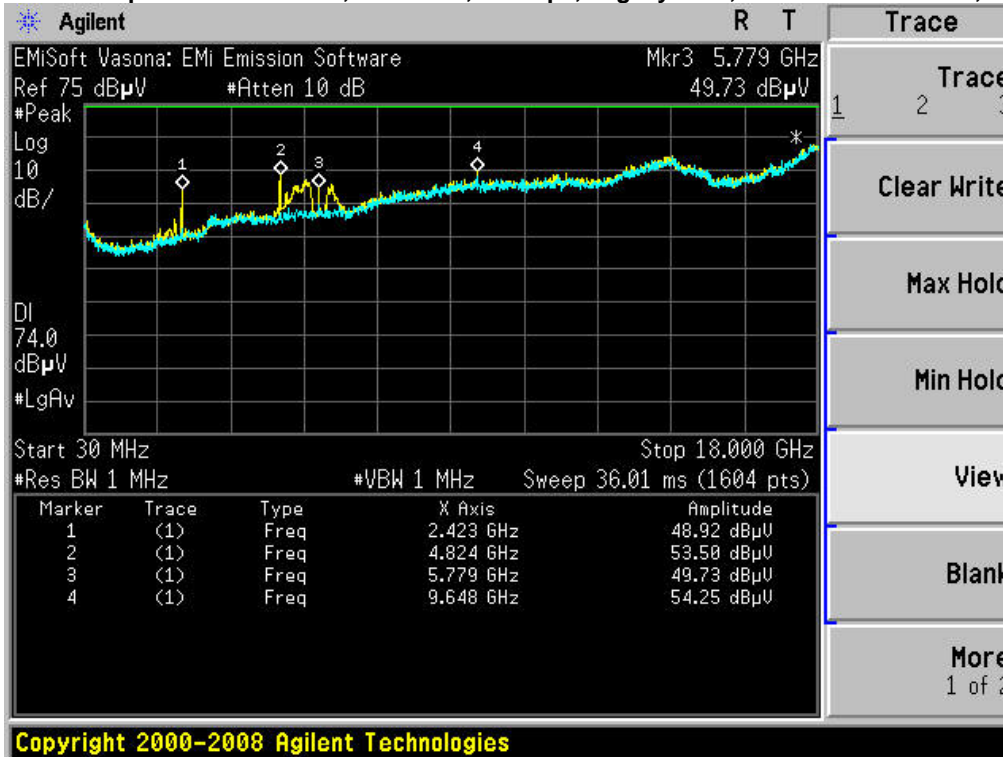


**Radiated Spurious Emissions, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Peak**

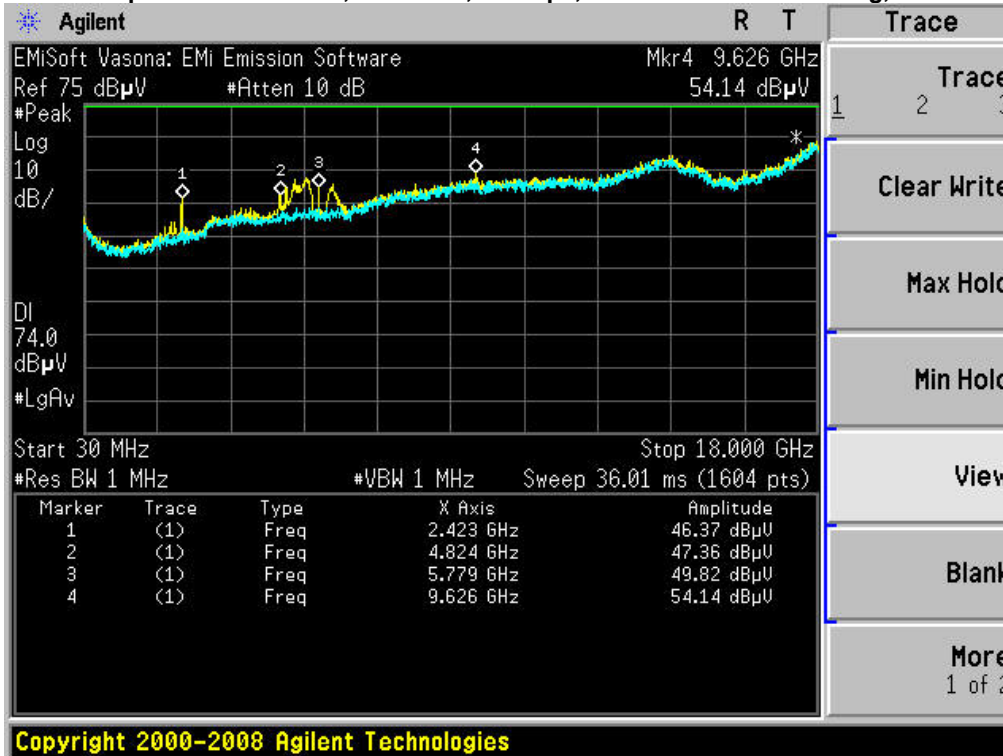




**Radiated Spurious Emissions, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

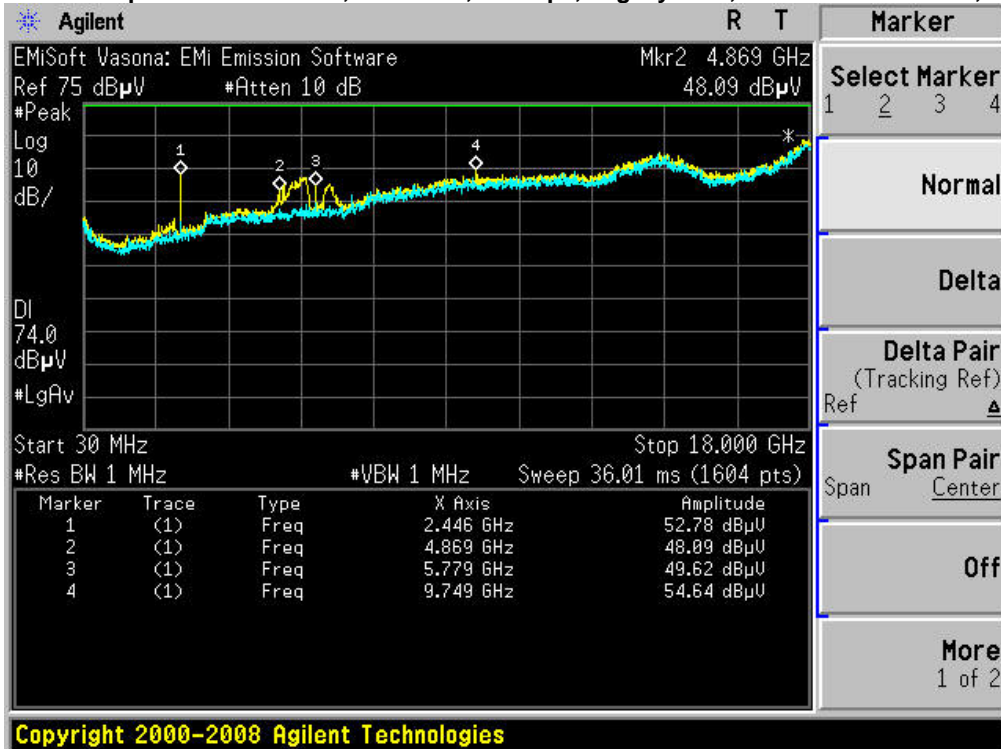


**Radiated Spurious Emissions, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Peak**

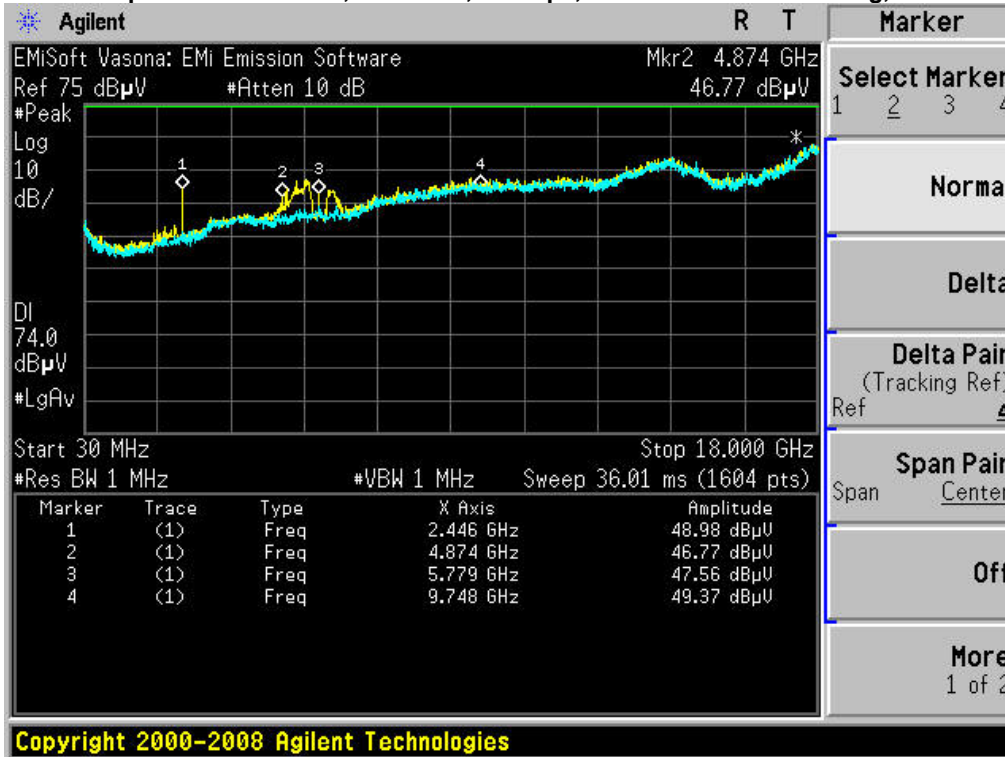




**Radiated Spurious Emissions, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**

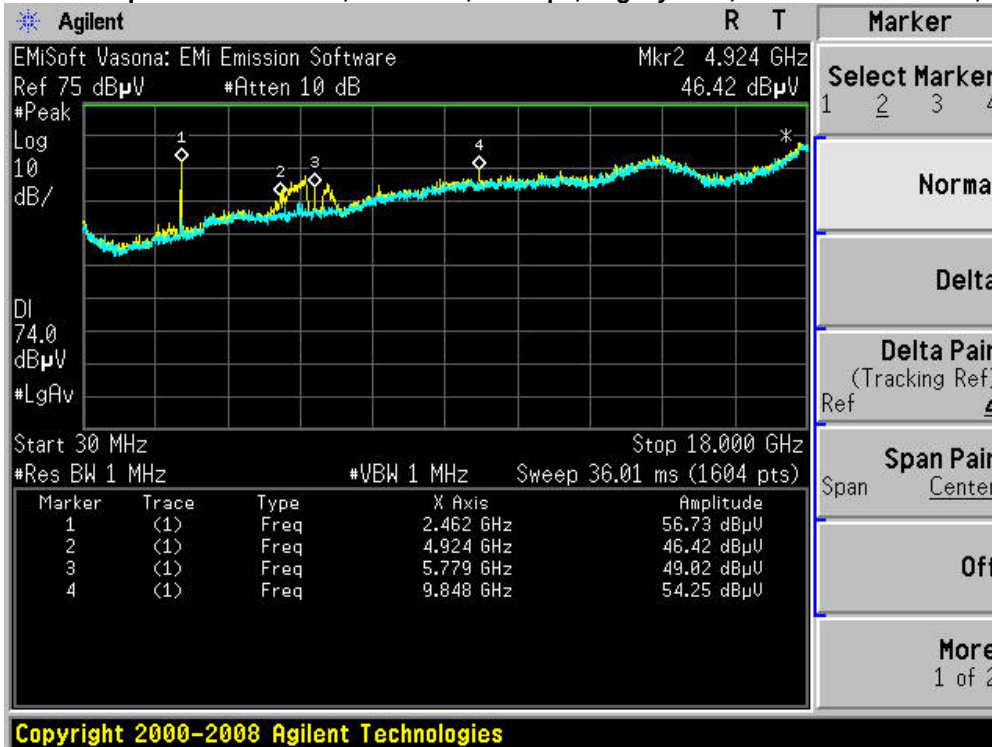


**Radiated Spurious Emissions, 2462 MHz, 54 Mbps, Non HT-20 , Beam Forming, Peak**

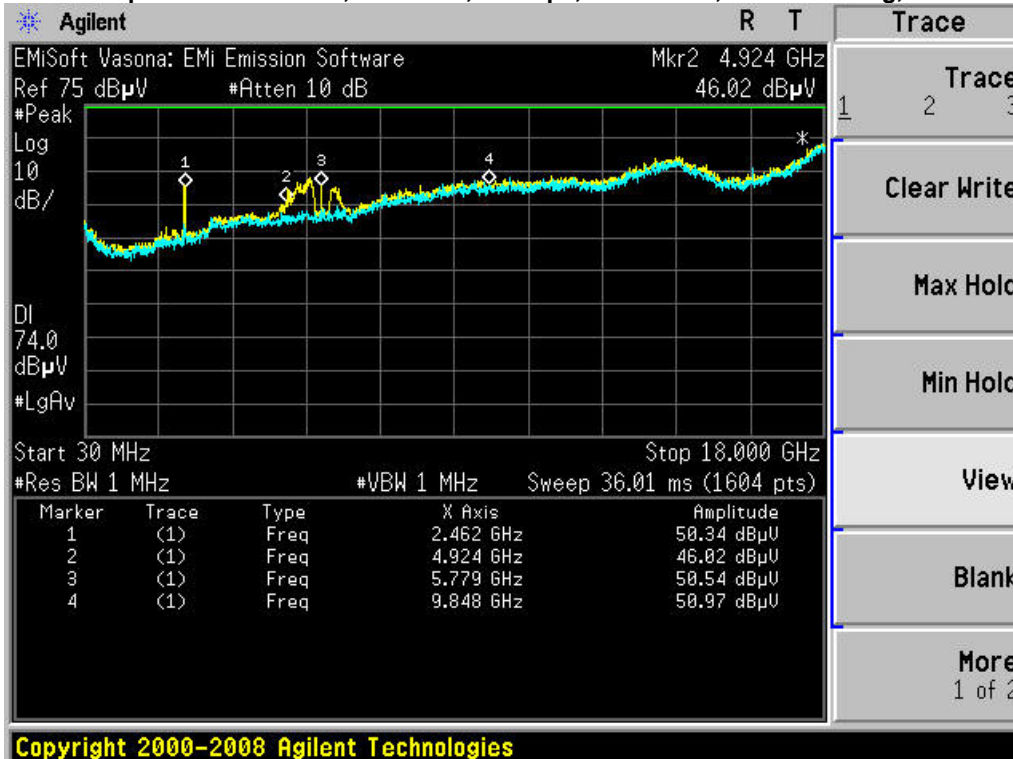




**Radiated Spurious Emissions, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

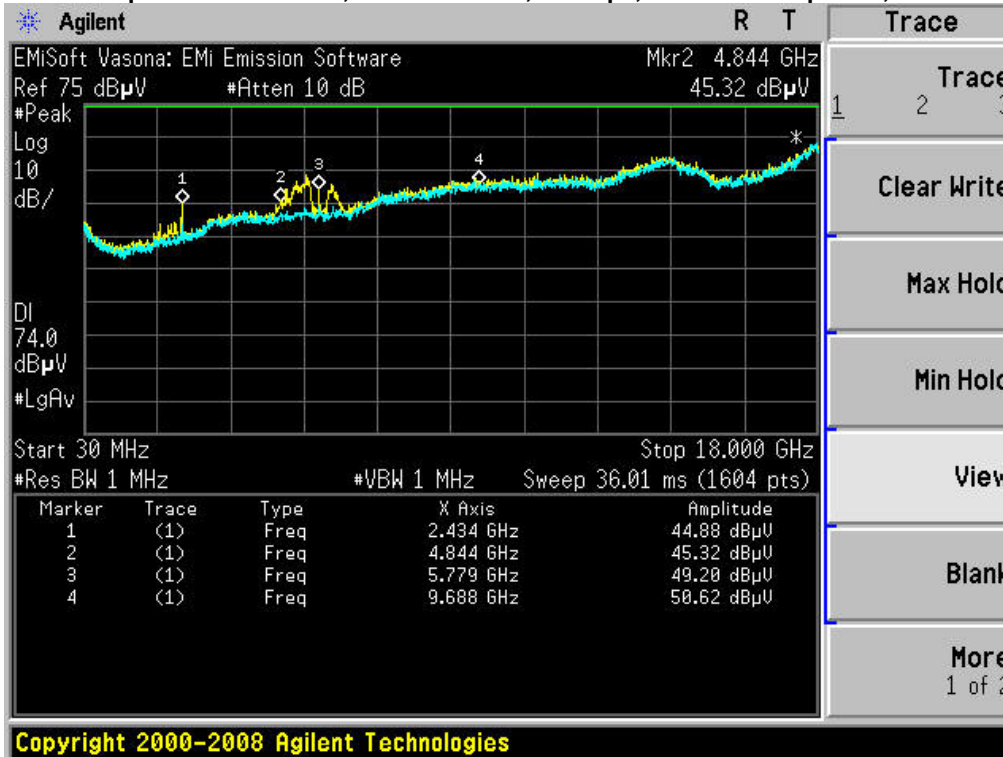


**Radiated Spurious Emissions, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak**

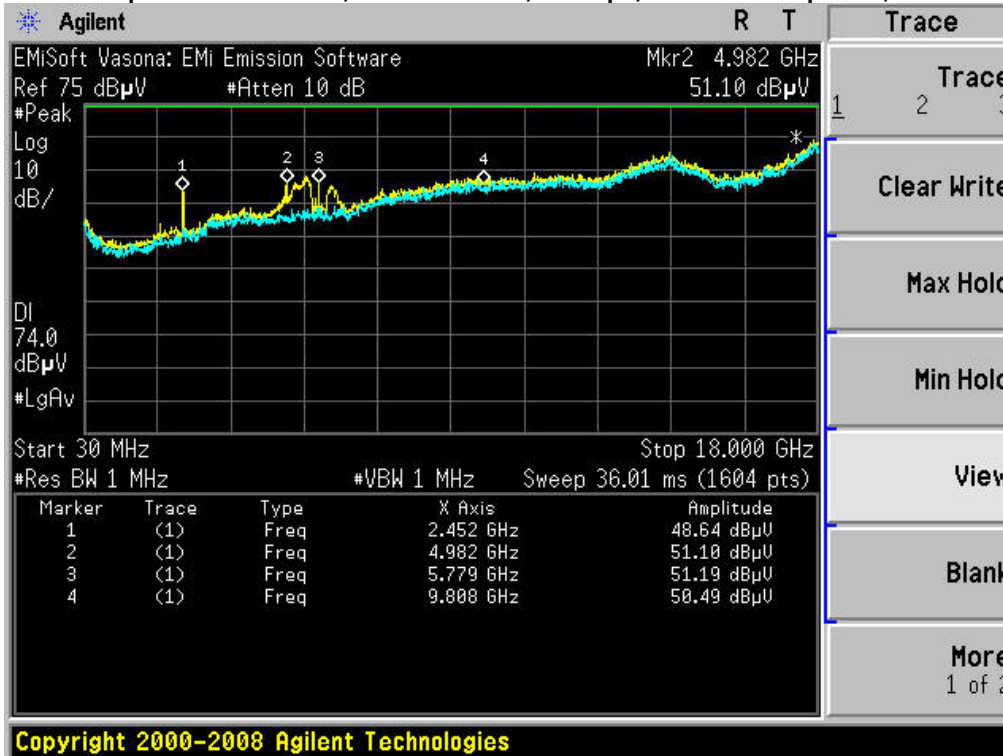







**2.4GHz 3dBi Omni Antenna**

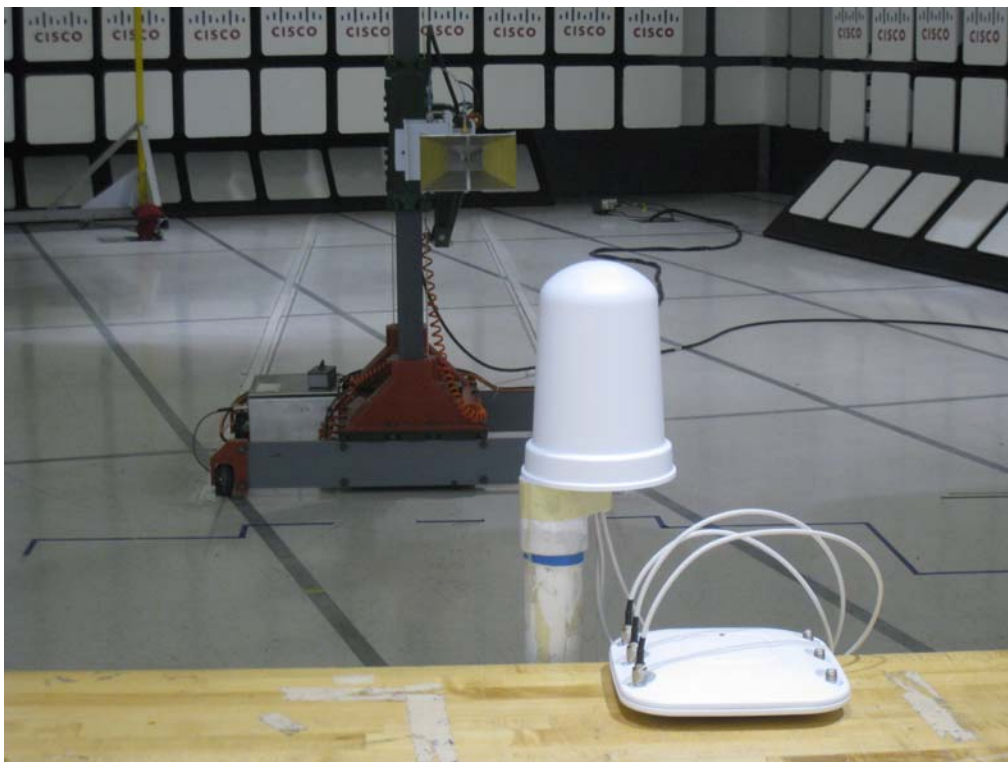

**2.4GHz 4dBi Omni Antenna**

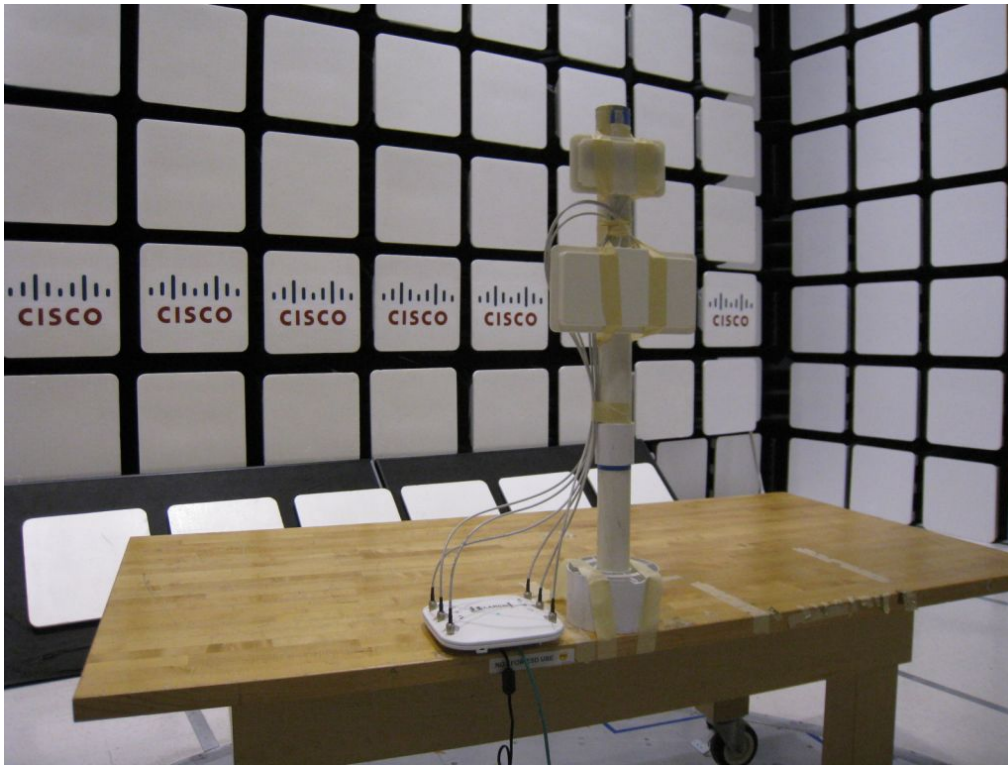

**2.4GHz 6dBi MIMO patch co-located with 5GHz 6dBi MIMO patch**

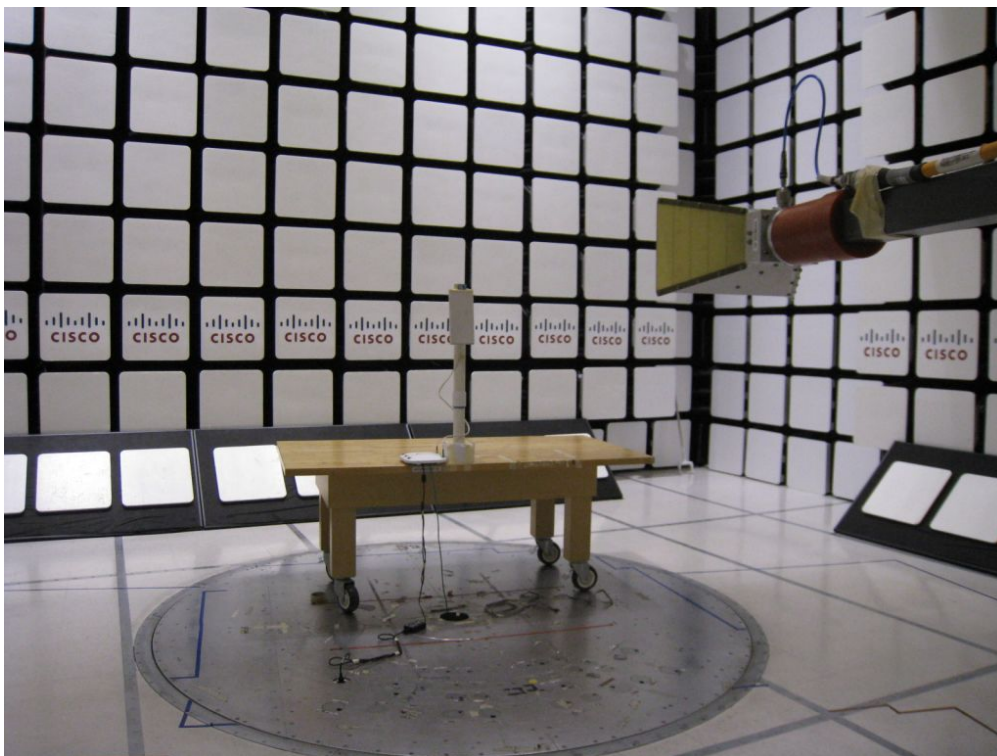


**2.4GHz 5.2 dBi omni Antenna**



**13 dBi Patch Antennas**




Conducted emissions

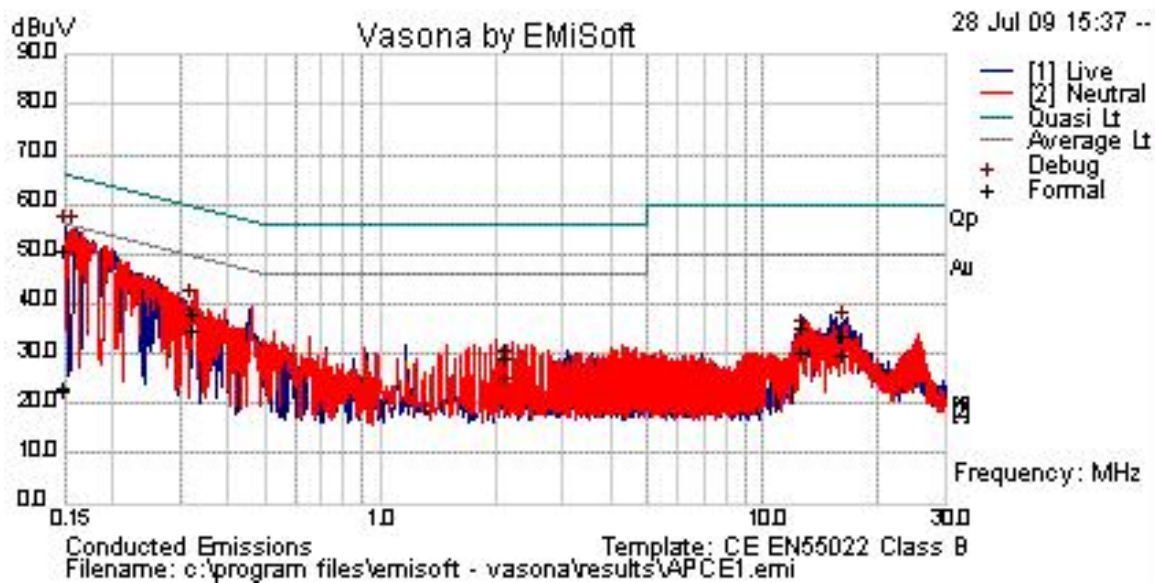

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.15	11.3	10.1	1.8	23.2	Av	N	56	-32.8	Pass	
0.15	39	10.1	1.8	51	Qp	N	66	-15	Pass	
0.155	39	10.1	1.7	50.8	Qp	N	65.7	-14.9	Pass	
0.155	10.9	10.1	1.7	22.7	Av	N	55.7	-33	Pass	
0.326	23.7	10.2	0.8	34.7	Av	N	49.6	-14.8	Pass	
0.326	27.2	10.2	0.8	38.2	Qp	N	59.6	-21.4	Pass	
2.152	20.3	10.3	0.4	31	Qp	N	56	-25	Pass	
2.152	18.8	10.3	0.4	29.5	Av	N	46	-16.5	Pass	
12.769	19.2	10.8	0.5	30.5	Av	N	50	-19.5	Pass	
12.769	24.2	10.8	0.5	35.6	Qp	N	60	-24.4	Pass	
16.354	18	11	0.7	29.6	Av	N	50	-20.4	Pass	
16.354	22.3	11	0.7	33.9	Qp	N	60	-26.1	Pass	




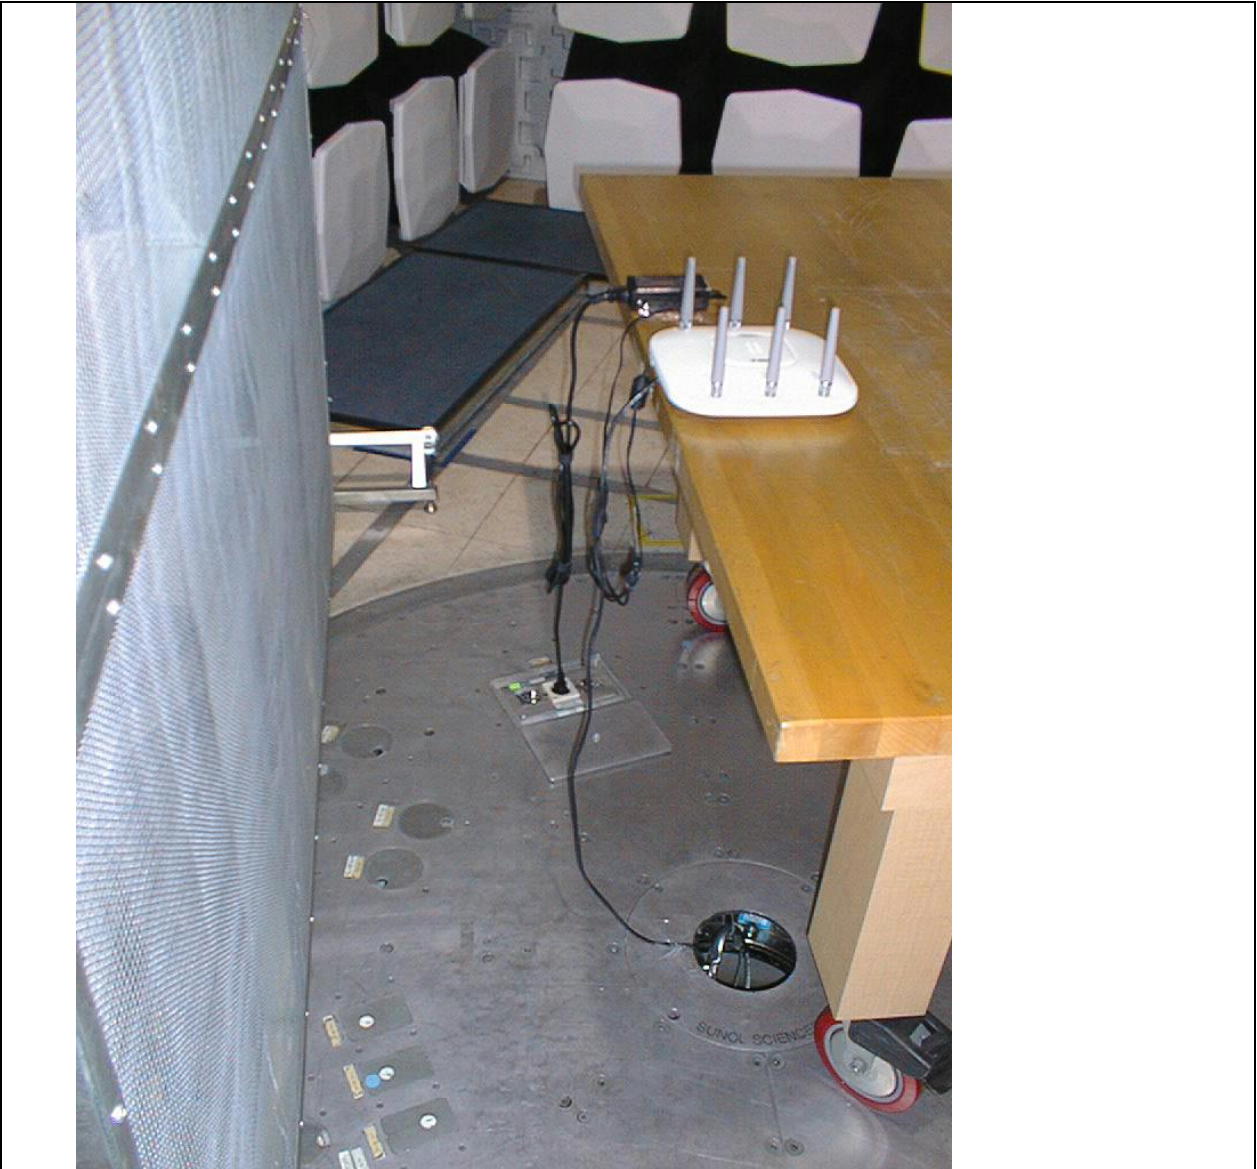

**Title:** Conducted Emissions Configuration Photograph



Radiated emissions

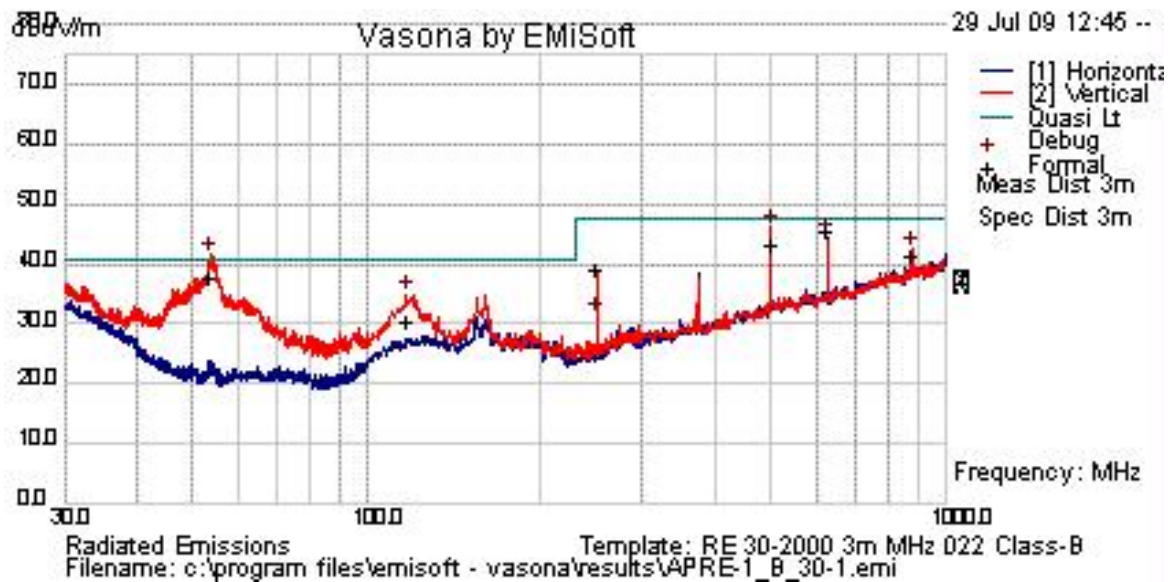

**Test Results Table**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
53.747	29.3	0.8	7.4	37.5	Qp	V	96	57	40.5	-3	Pass	
117.525	15.2	1.5	13.6	30.4	Qp	V	96	55	40.5	-10.2	Pass	
250.005	27.1	2.1	11.6	40.8	Qp	V	96	170	47.5	-6.7	Pass	
500.019	23.1	2.8	17.8	43.7	Qp	V	100	178	47.5	-3.8	Pass	
625.025	22.8	3.1	19	45	Qp	V	158	156	47.5	-2.5	Pass	
875.033	16	3.6	21.9	41.5	Qp	V	121	178	47.5	-6	Pass	



**Title:** Radiated Emissions Configuration Photograph

## Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 * P * G) / d} \quad \text{and} \quad S = E^2 / 3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm<sup>2</sup>

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W}) / 1000 \quad d(\text{cm}) = 100 * d(\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d=Distance in cm

P=Power in mW

G=Numerica Antenna Gain

S=Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm}) / 10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$s = ((0.282 * 10^{((P + G) / 20)}) / d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm<sup>2</sup>



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$  maximum. The highest supported antenna gain is 13.5 dBi (16.5dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Bit Rate (Mbps)	Power Density (mW/cm <sup>2</sup> )	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
2412	11	1	21.1	16.5	<b>21.39</b>	20	-1.39
2437	11	1	23.2	16.5	<b>27.24</b>	20	-7.24
2462	11	1	21.3	16.5	<b>21.89</b>	20	-1.89
2412	54	1	19.3	16.5	<b>17.39</b>	20	2.61
2437	54	1	20.9	16.5	<b>20.90</b>	20	-0.90
2462	54	1	17.6	16.5	<b>14.30</b>	20	5.70

**MPE Calculations**

To maintain compliance, installations will assure a separation distance of at least 20cm. Installations utilizing antennas with gain greater than 10 dBi will assure a separation distance of at least 30 cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	Bit Rate (Mbps)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Margin (mW/cm <sup>2</sup> )	Power Density (W/m <sup>2</sup> )
2412	11	20	21.1	16.5	<b>1.14</b>	1	-0.14	<b>11.4</b>
2437	11	20	23.2	16.5	<b>1.86</b>	1	-0.86	<b>18.6</b>
2462	11	20	21.3	16.5	<b>1.20</b>	1	-0.20	<b>12.0</b>
2412	54	20	19.3	16.5	<b>0.76</b>	1	0.24	<b>7.6</b>
2437	54	20	20.9	16.5	<b>1.09</b>	1	-0.09	<b>10.9</b>
2462	54	20	17.6	16.5	<b>0.51</b>	1	0.49	<b>5.1</b>

**Appendix C: Test Equipment/Software Used to perform the test**

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
CIS002119	EMC Test Systems	3115	Double Ridged Guide Horn Antenna	30-Jun-10	30-Jun-11
CIS005691	Miteq	NSP1800-25-S1	Broadband Preampfier	12-Oct-09	12-Oct-10
CIS008195	TTE	H613-150K-50-21378	Hi Pass Filter - 150KHz cutoff	5-Jan-10	5-Jan-11
CIS045995	Fischer	F-090527-1009-2	LISN Adaptor	22-Jun-10	22-Jun-11
CIS020975	Micro-Coax	UFB311A-0-1344-520520	RF Coaxial Cable, to 18GHz, 134.4 in	25-Feb-10	25-Feb-11
CIS025662	Micro-Coax	UFB311A-1-0840-504504	RF Coaxial Cable, to 18GHz, 84 in	4-Mar-10	4-Mar-11
CIS030559	Micro-Coax	UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	25-Feb-10	25-Feb-11
CIS030652	Sunol Sciences	JB1	Combination Antenna, 30MHz-2GHz	27-Jul-10	27-Jul-11
CIS035613	Micro-Tronics	BRM50702-02	Notch Filter, SB:2.4-2.5GHz	4-Jun-10	4-Jun-11
CIS034972	Midwest Microwave	ATT-0640-20-29M-02	Attenuator, <b>20dB</b>	14-May-10	14-May-11
CIS036716	Cisco	RF Coaxial Cable-SMA	Radio Test Cable, SMA-SMA	15-Dec-09	15-Dec-10
CIS037581	ETS-Lindgren	3117	Double Ridged Waveguide Horn Antenna	22-Jun-10	22-Jun-11
CIS038371	Cisco	TH0118	Mast Mount Preampfier Array	17-Nov-09	17-Nov-10
CIS040603	Agilent	E4440A	Spectrum Analyzer	04-Aug-10	04-Aug-11
CIS041990	MegaPhase	EM18-NKNK-320	RF 18GHz N-Type cable	25-Feb-10	25-Feb-11
COM000590	Agilent	E4448A	Spectrum Analyzer	28-May-10	28-May-11
COM000601	Agilent	E4417A	EPM-P Series Power Meter	5-Oct-09	5-Oct-10
COM000602	Agilent	E9327A	Peak and Avg Power Sensor	5-Oct-09	5-Oct-10