



Test Report

AIR-CAP1552x-A-K9 Series

Cisco Aironet 802.11n Single Band Mesh Access Points

FCC ID: LDK102074P

IC: 2461B-102074P

(Also covers AIR-CAP1552x-N-K9 and AIR-CAP1552x-T-K9 Series)

2400-2483.5 MHz

Against the following Specifications:

CFR47 Part 15.247

RSS210

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
1.1 TEST SUMMARY	3
SECTION 2: ASSESSMENT INFORMATION.....	4
2.1 GENERAL	4
2.4 TESTING FACILITIES	5
2.6 EUT DESCRIPTION.....	5
SECTION 4: SAMPLE DETAILS.....	7
APPENDIX A: EMISSION TEST RESULTS	8
AVERAGE OUTPUT POWER	8
6DB BANDWIDTH	9
99% AND 26DB BANDWIDTH.....	22
PEAK OUTPUT POWER.....	35
POWER SPECTRAL DENSITY	49
CONDUCTED SPURIOUS EMISSIONS	62
APPENDIX B: EMISSION TEST RESULTS	75
RADIATED BANDEDGE.....	75
RADIATED SPURIOUS EMISSIONS.....	118
2.4GHz 5.2dBi OMNI CONDUCTED EMISSIONS	129
CONDUCTED EMISSIONS	129
RADIATED EMISSIONS.....	131
MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....	132
APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST.....	134

Section 1: Overview

1.1 Test Summary

Samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of start of testing

8-November-2010

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson

2.5 Equipment Assessed (EUT)

AIR-CAP1552E-A-K9 Cisco Aironet 802.11n Dual Band Mesh Access Point

2.6 EUT Description

The AIR-CAP1552 Series Cisco Aironet 802.11n Dual Band Mesh Access Points require professional installation, and supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

- Legacy CCK, Single Antenna, 1 to 11 Mbps
- Legacy CCK, Dual Antennas, 1 to 11 Mbps
- Legacy OFDM, Non HT-20, Single Antenna, 6 to 54 Mbps
- Legacy OFDM, Non HT-20, Dual Antennas, 6 to 54 Mbps
- Legacy OFDM, Non HT-20 Dual Antennas with Beam Forming, 6 to 54 Mbps
- HT-20, Single Antenna, M0 to M7
- HT-20, Dual Antennas, M0 to M15
- Non HT-40 Duplicate, Single Antenna, 6-54 Mbps
- Non HT-40 Duplicate, Dual Antennas, 6-54 Mbps
- HT-40, Single Antenna, M0 to M7
- HT-40, Dual Antennas, M0 to M15



The following antennas are supported by this product series. The items in bold will be specifically tested and cover all others. The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4/5 GHz	AIR-ANT2547V-N	Omni	4 / 7
	Internal	Omni	2 / 4



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP1552E-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-ANT2547V-N						

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting



Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Average Output Power

Connect the antenna(s) to the power meter at the average power sensor input. Configure the power meter to measure average power for the transmitter frequencies listed below (enter all losses between the transmitter output and the power meter).

Place the radio in continuous transmit mode and record the reading on the power meter.

Frequency	Modek	Data Rate	Target Power Level			Actual Power Level
			Tx A	Tx B	Total	Total
2412	Legacy CCK, Single Tx Path	11	25	Off	25	23.8
2412	Legacy CCK, Dual Tx Path	11	25	25	28	26.5
2412	Non HT-20, Single Tx Path	6	25	Off	25	23.9
2412	Non HT-20, Dual Tx Path	6	24	24	27	25.3
2412	Non HT-20 Beam Forming	6	22	22	25	23.4
2437	Legacy CCK, Dual Tx Path	11	25	25	28	27.4
2437	Non HT-20 Beam Forming	6	25	25	28	26.1
2462	Legacy CCK, Single Tx Path	11	25	Off	25	23.5
2462	Legacy CCK, Dual Tx Path	11	25	25	28	27.3
2462	Non HT-20, Single Tx Path	6	25	Off	25	23.5
2462	Non HT-20, Dual Tx Path	6	23	23	26	25.5
2462	Non HT-20 Beam Forming	6	22	22	25	23.0
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	20	Off	20	19.2
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	18	18	21	20.7
2412/2432	HT-40, Single Tx Path	M0	21	Off	21	19.7
2412/2432	HT-40, Dual Tx Path	M0	20	20	23	22.2
2427/2447	Non HT-40 Duplicate	6	22	22	25	20.8
2427/2447	HT-40	M0	24	24	27	25.7
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	21	Off	21	19.9
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	19	19	22	20.6
2442/2462	HT-40, Single Tx Path	M0	21	Off	21	19.3
2442/2462	HT-40, Dual Tx Path	M0	19	19	22	21.1

6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.


Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	100 kHz
X dB Bandwidth:	6 dB
Detector:	Peak
Trace:	Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
2412	Legacy CCK, Single Tx Path	11	9.6	>500	9.1
2412	Legacy CCK, Dual Tx Path	11	9.4	>500	8.9
2412	Non HT-20, Single Tx Path	6	16.3	>500	15.8
2412	Non HT-20, Dual Tx Path	6	15.8	>500	15.3
2412	Non HT-20 Beam Forming	6	15.8	>500	15.3
2437	Legacy CCK, Dual Tx Path	11	5.4	>500	4.9
2437	Non HT-20 Beam Forming	6	16.0	>500	15.5
2462	Legacy CCK, Single Tx Path	11	9.6	>500	9.1
2462	Legacy CCK, Dual Tx Path	11	5.6	>500	5.1
2462	Non HT-20, Single Tx Path	6	16.3	>500	15.8
2462	Non HT-20, Dual Tx Path	6	12.6	>500	12.1
2462	Non HT-20 Beam Forming	6	16.4	>500	15.9
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	35.3	>500	34.8
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	29.0	>500	28.5
2412/2432	HT-40, Single Tx Path	m0	35.3	>500	34.8
2412/2432	HT-40, Dual Tx Path	m0	33.9	>500	33.4
2427/2447	Non HT-40 Duplicate	6	35.1	>500	34.6
2427/2447	HT-40	m0	30.4	>500	29.9
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	35.2	>500	34.7
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	35.6	>500	35.1
2442/2462	HT-40, Single Tx Path	m0	35.2	>500	34.7
2442/2462	HT-40, Dual Tx Path	m0	32.7	>500	32.2


6dB Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

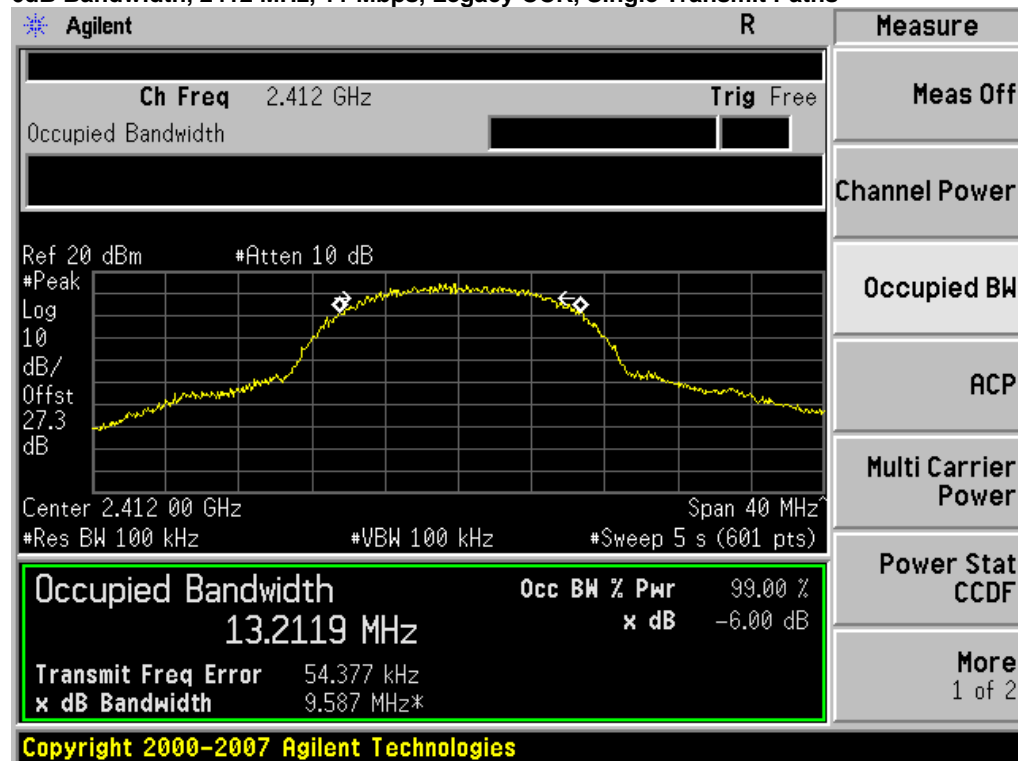


6dB Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

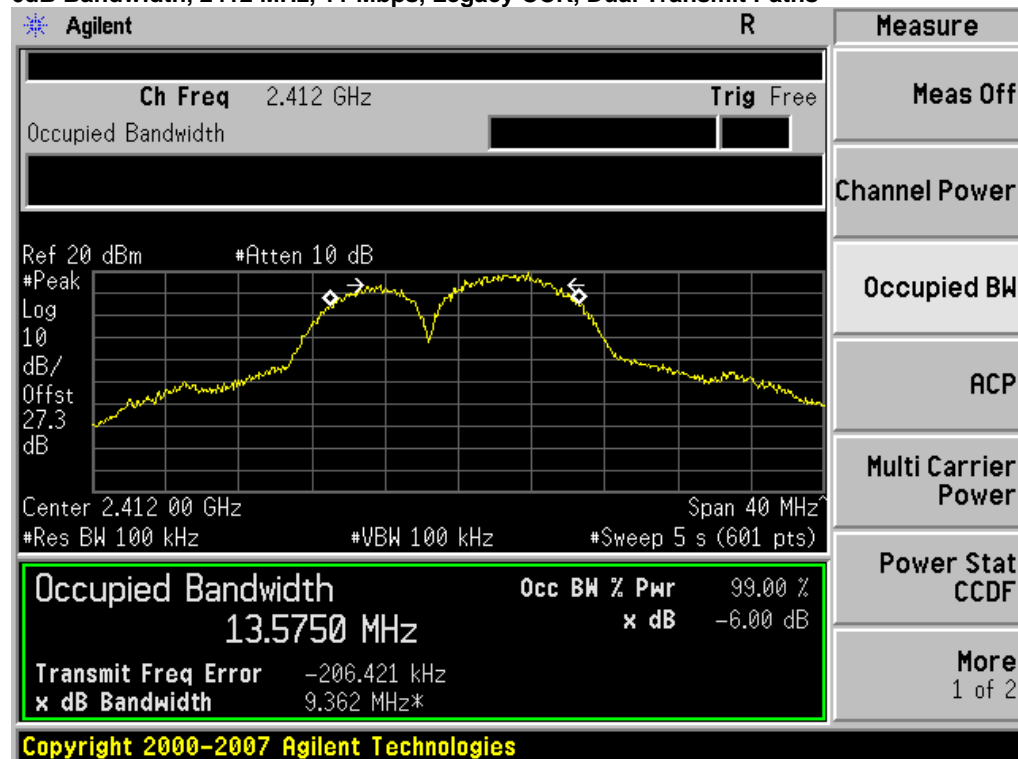


6dB Bandwidth, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

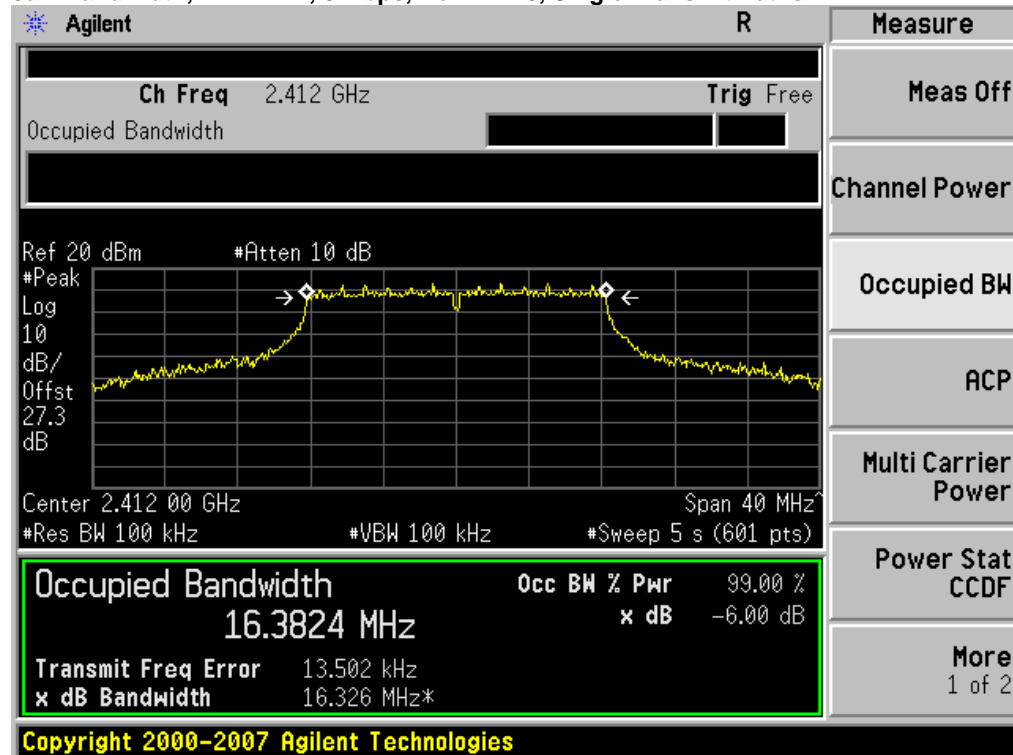


6dB Bandwidth, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

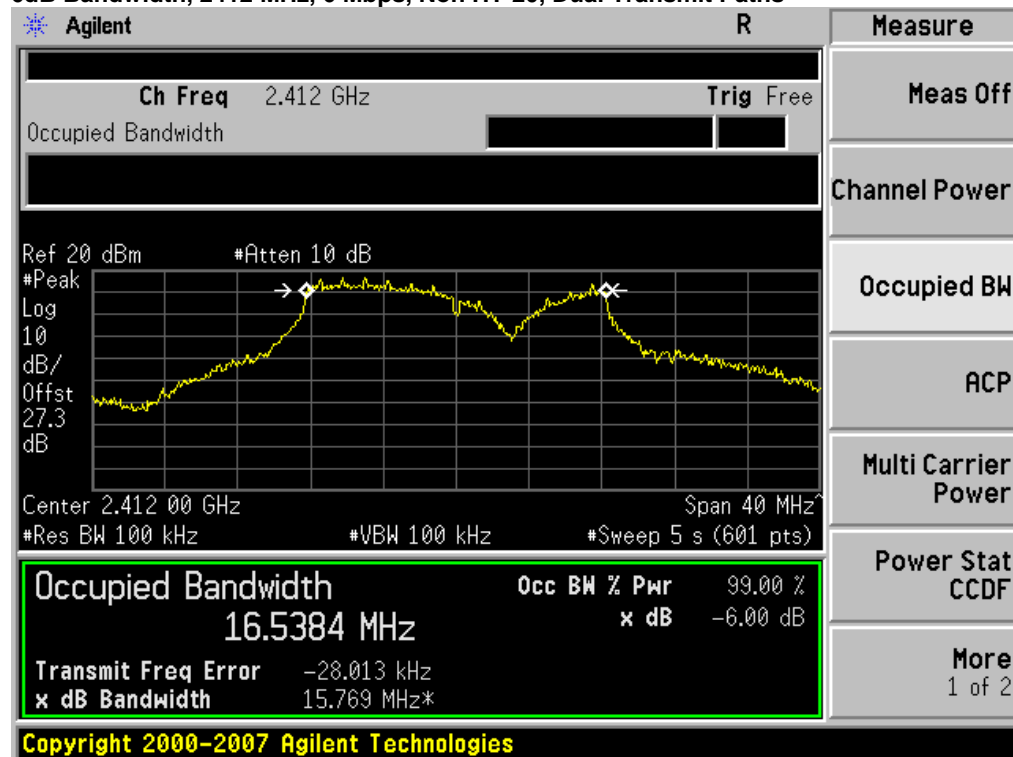


6dB Bandwidth, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

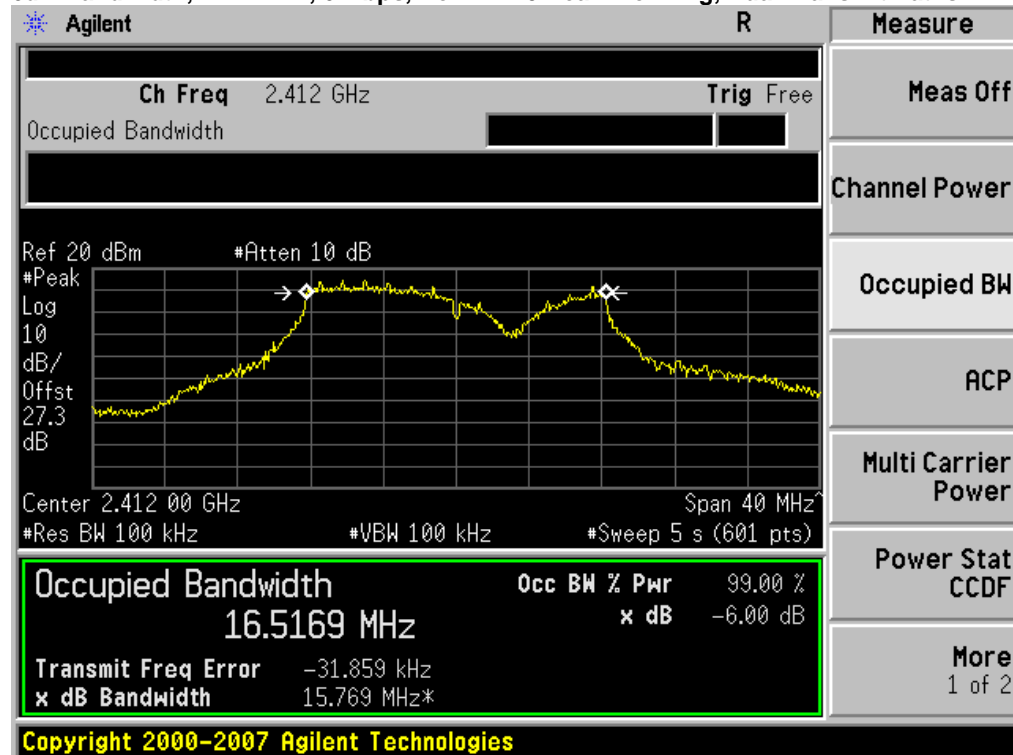


6dB Bandwidth, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

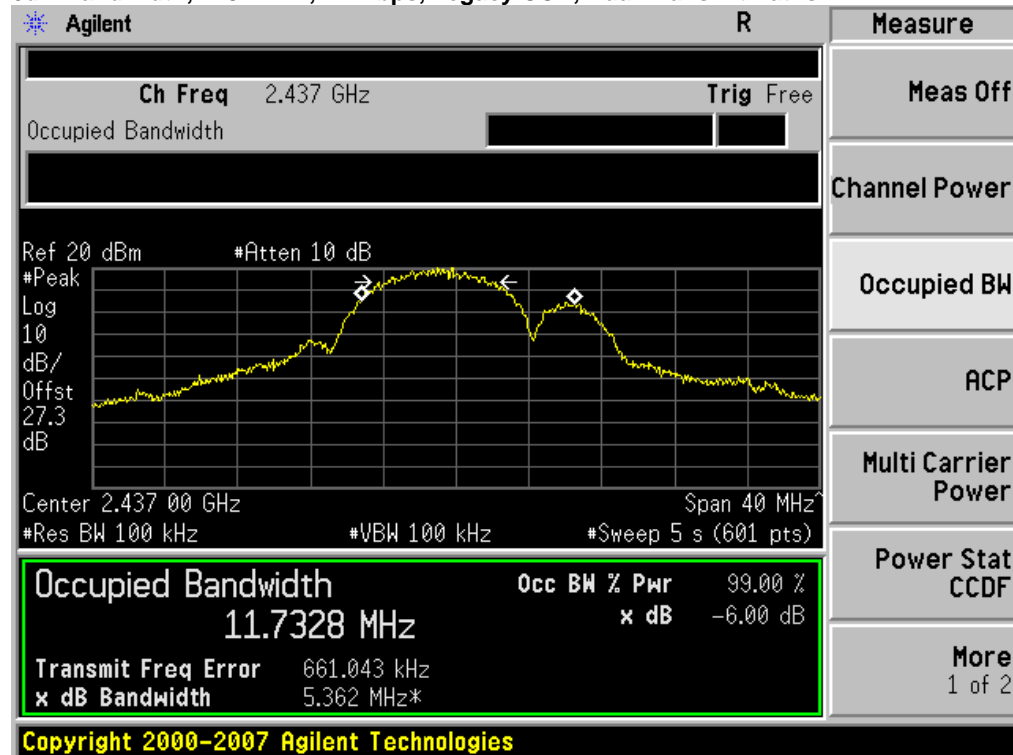


6dB Bandwidth, 2437 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

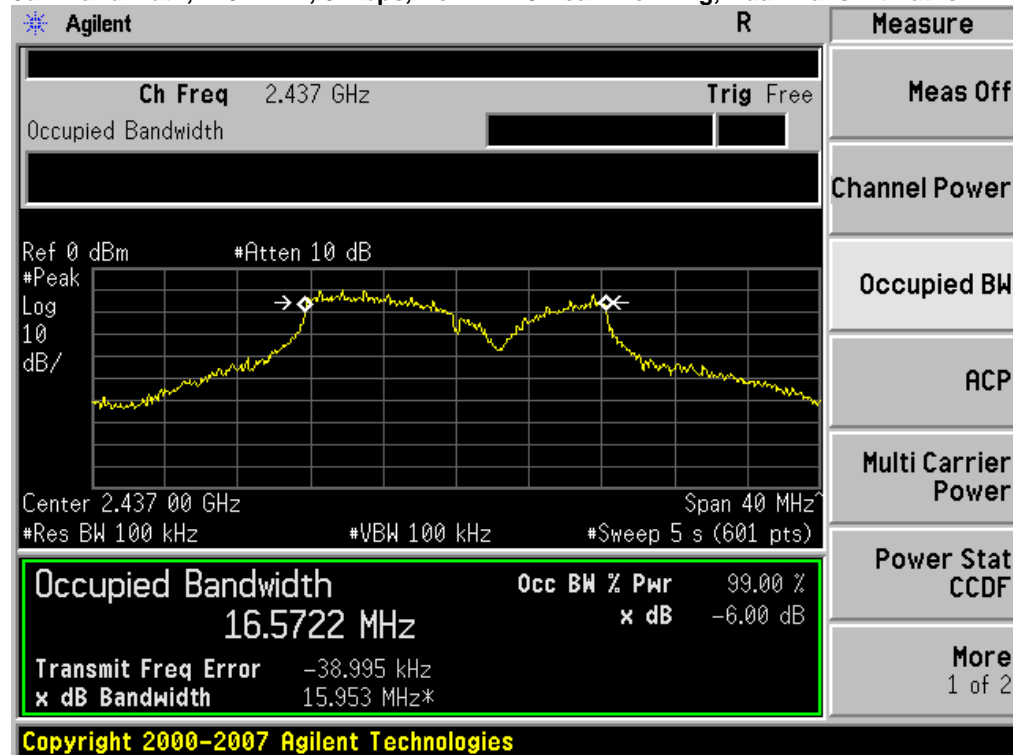


6dB Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

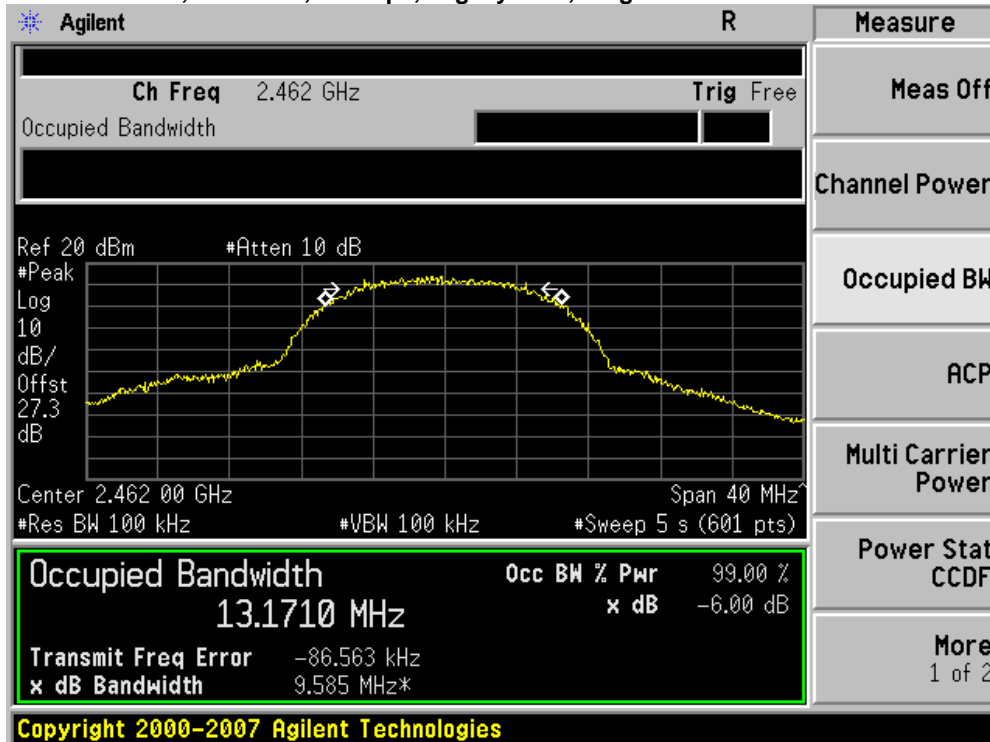


6dB Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

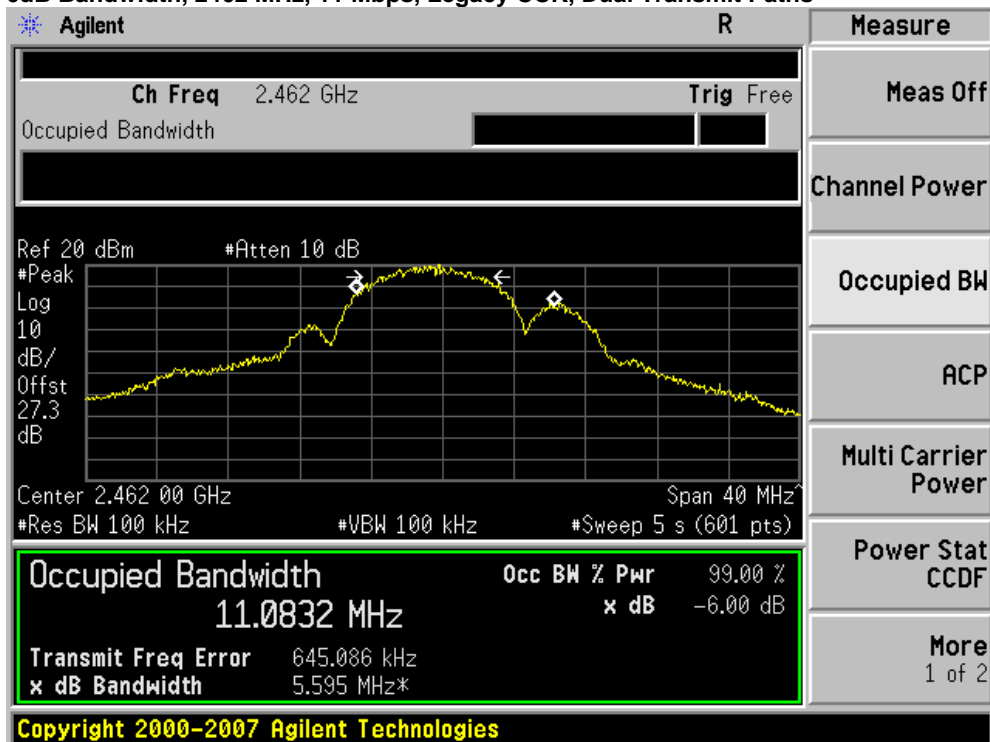


6dB Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

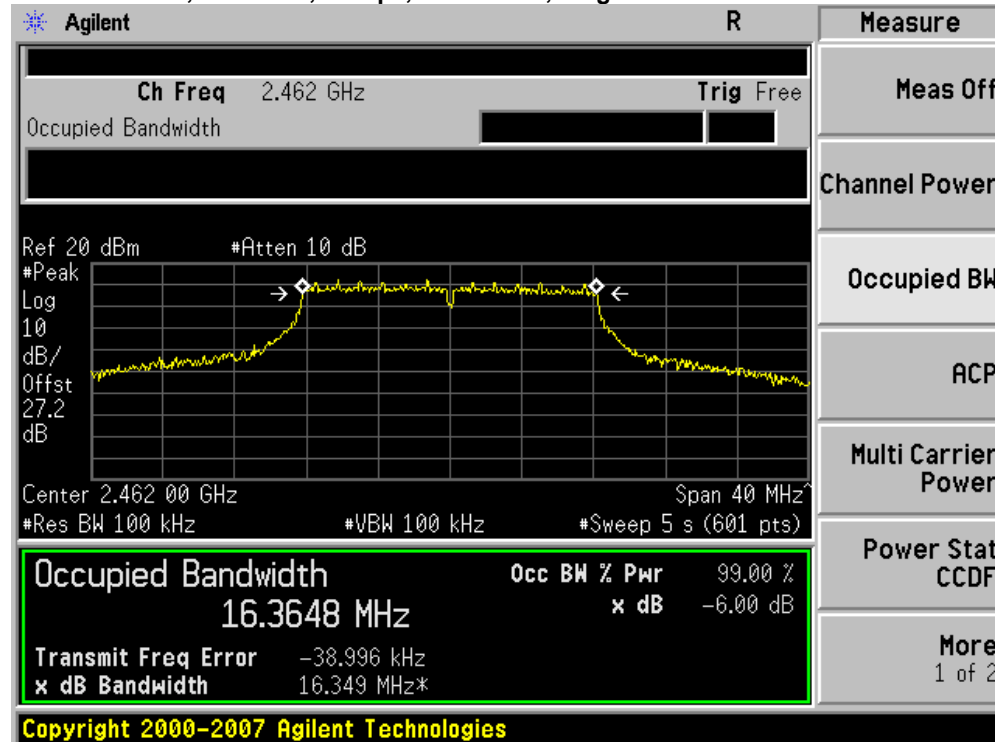


6dB Bandwidth, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

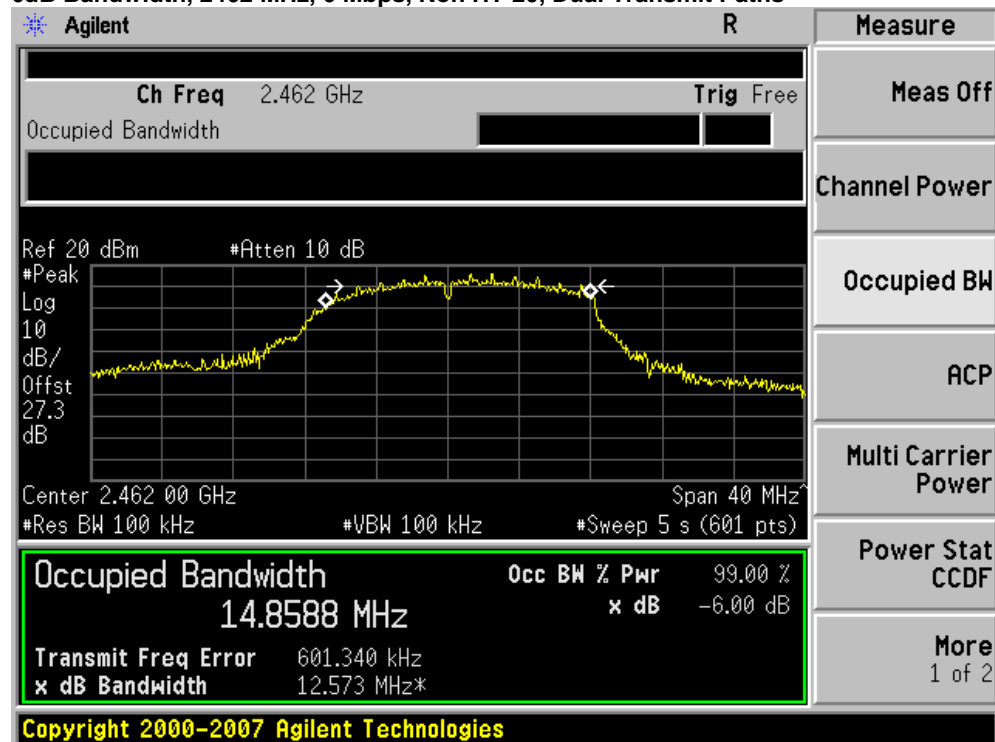


6dB Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

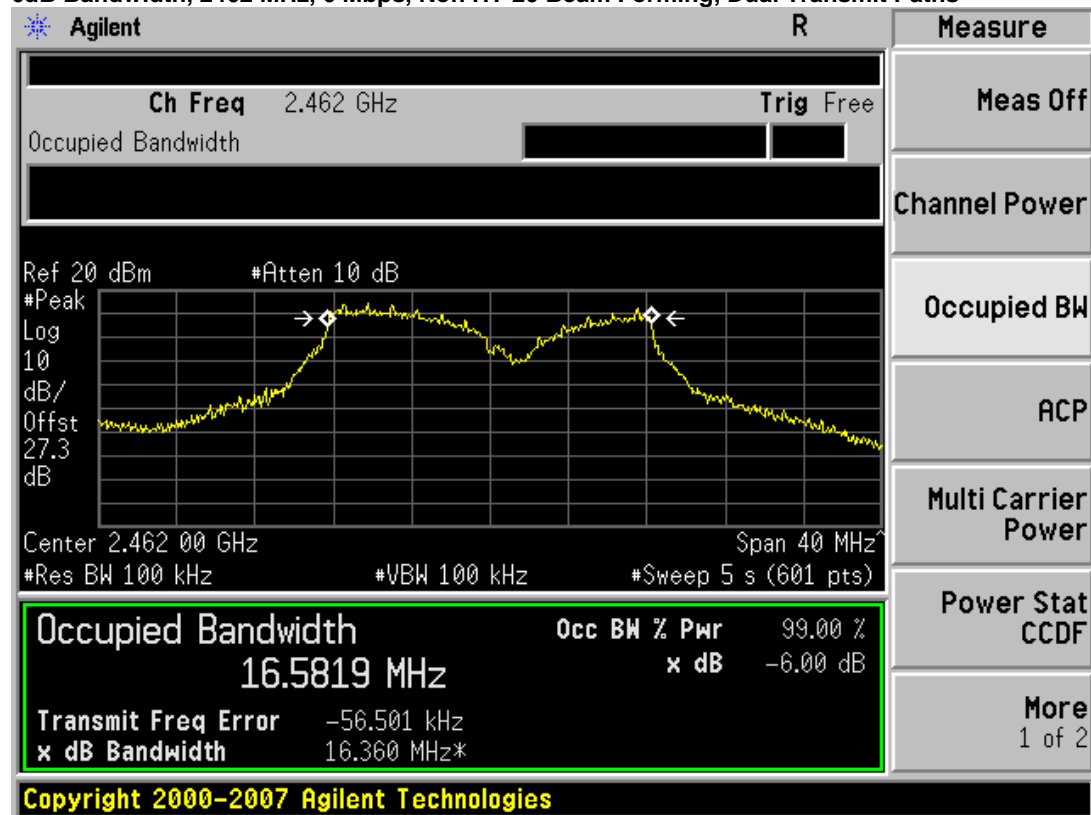

6dB Bandwidth, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

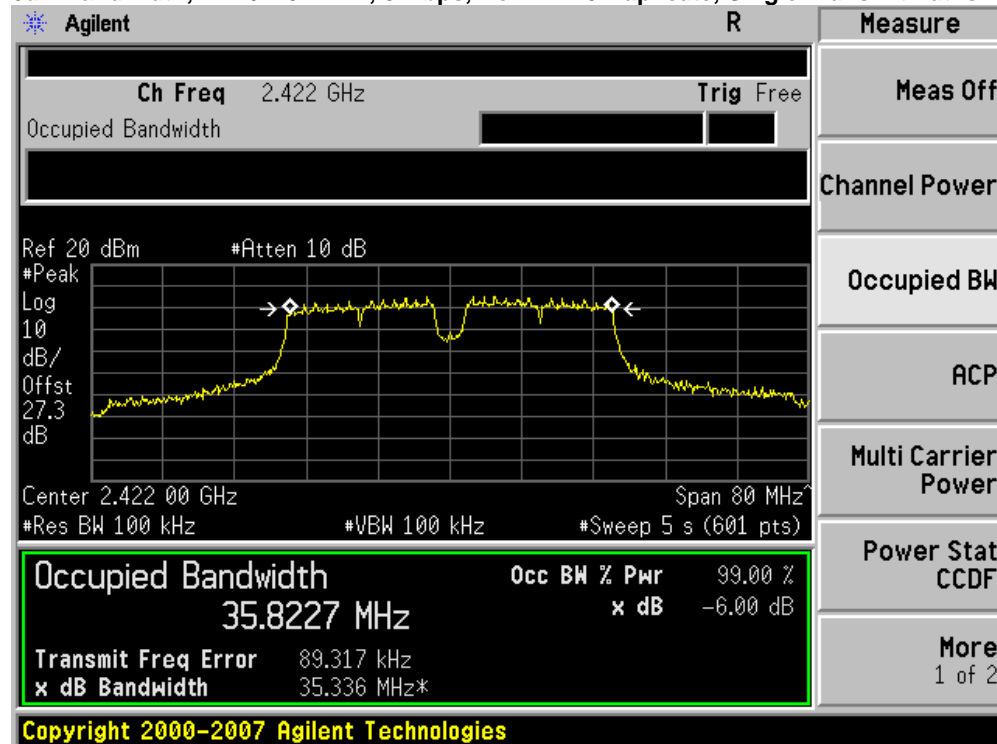


6dB Bandwidth, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

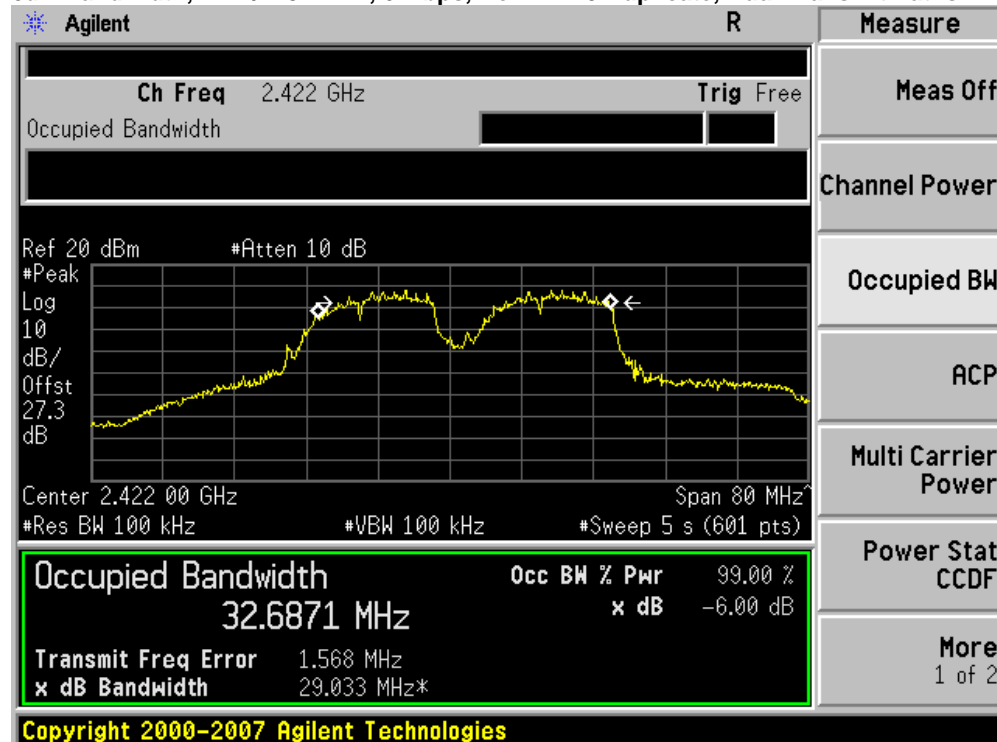





6dB Bandwidth, 2412/2432 MHz, M0, HT-40, Single Transmit Paths

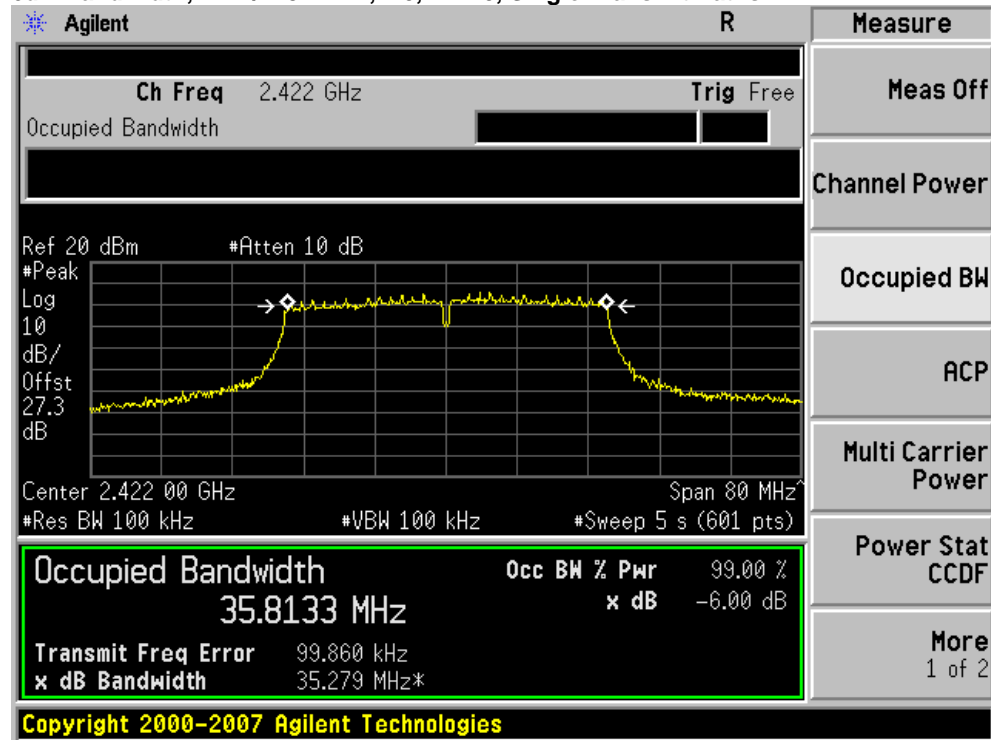


6dB Bandwidth, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

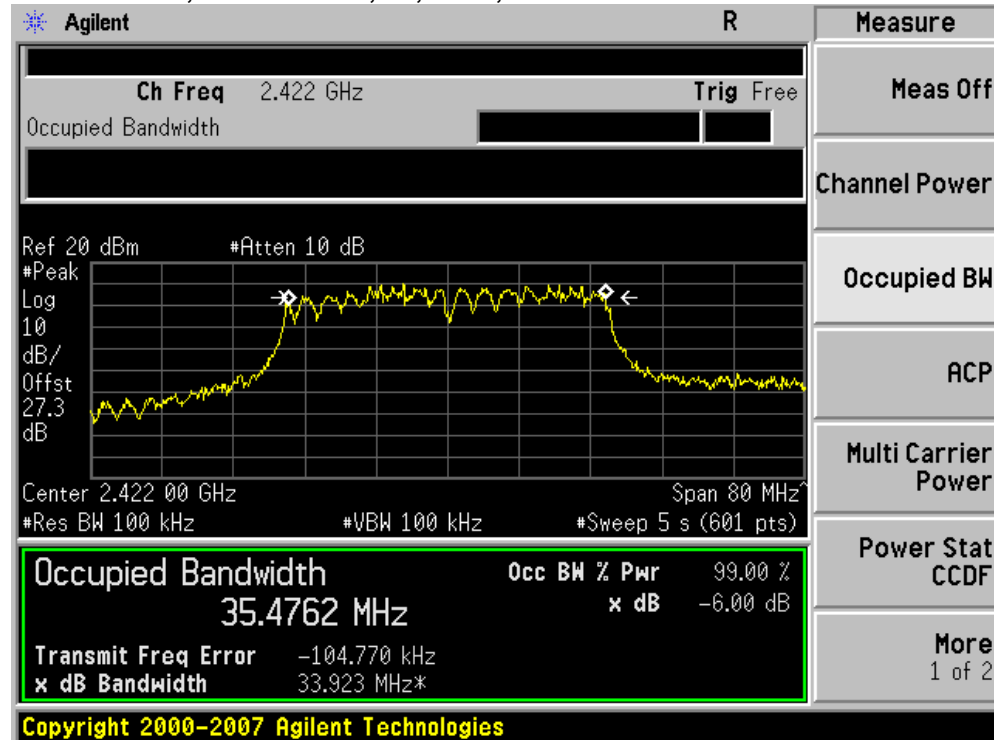


6dB Bandwidth, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

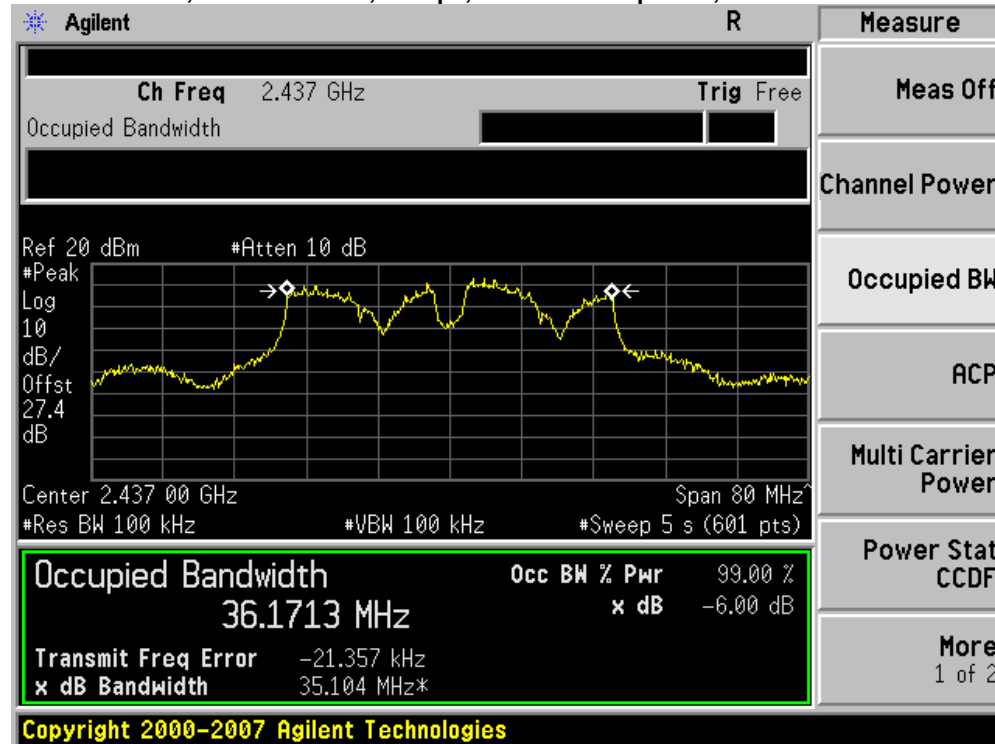


6dB Bandwidth, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

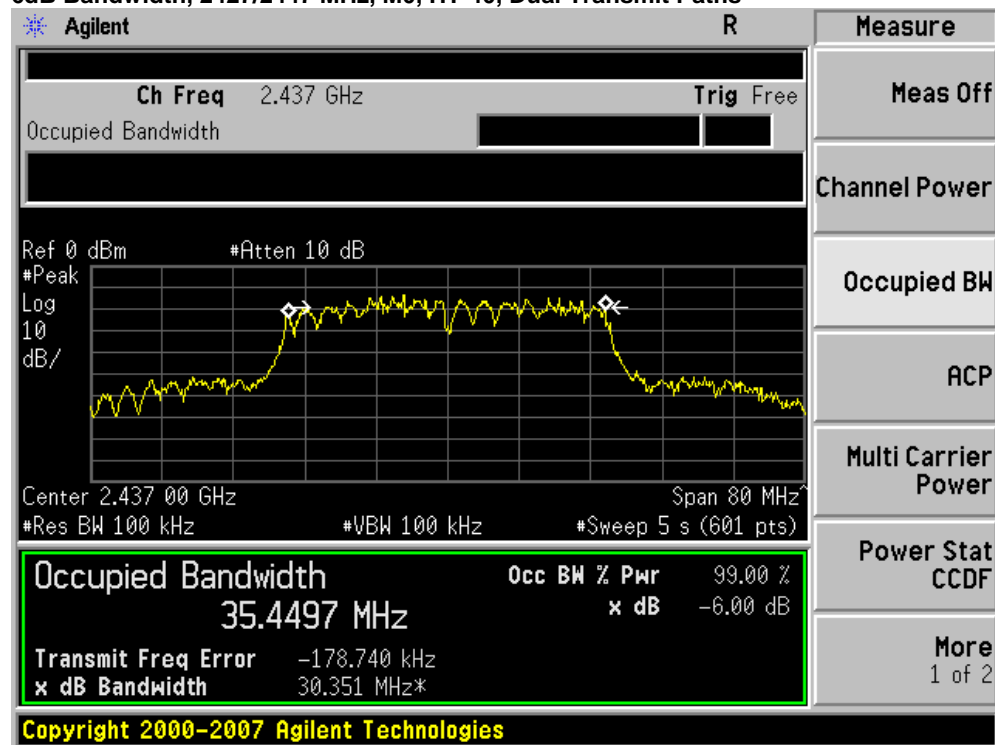


6dB Bandwidth, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

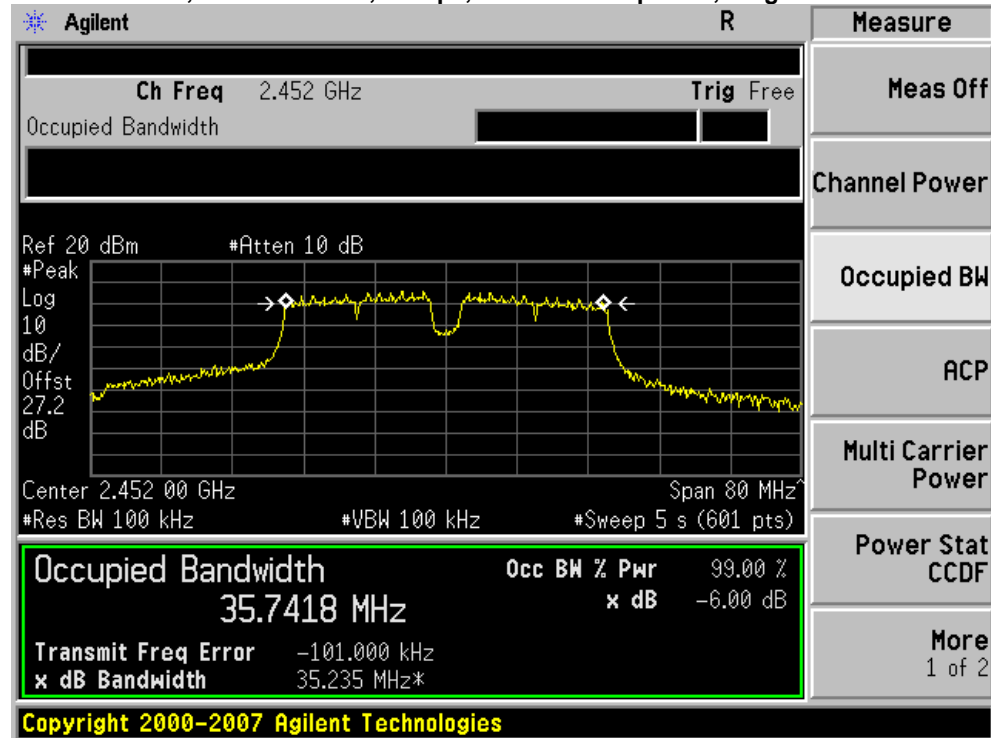


6dB Bandwidth, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

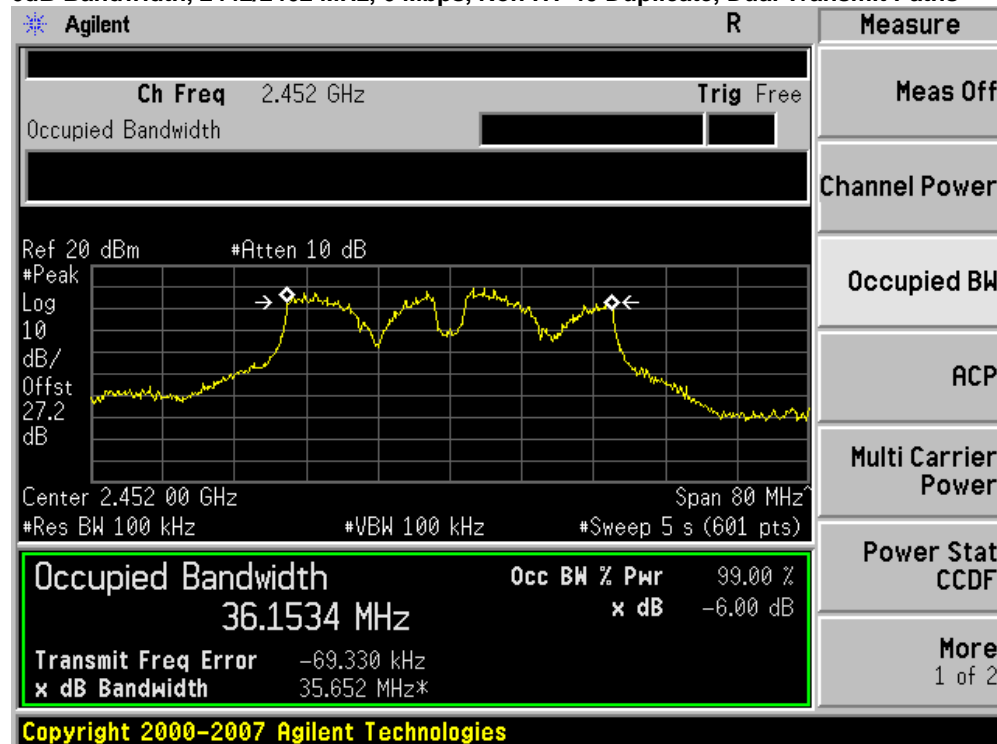

6dB Bandwidth, 2442/2462 MHz, M0, HT-40, Single Transmit Paths

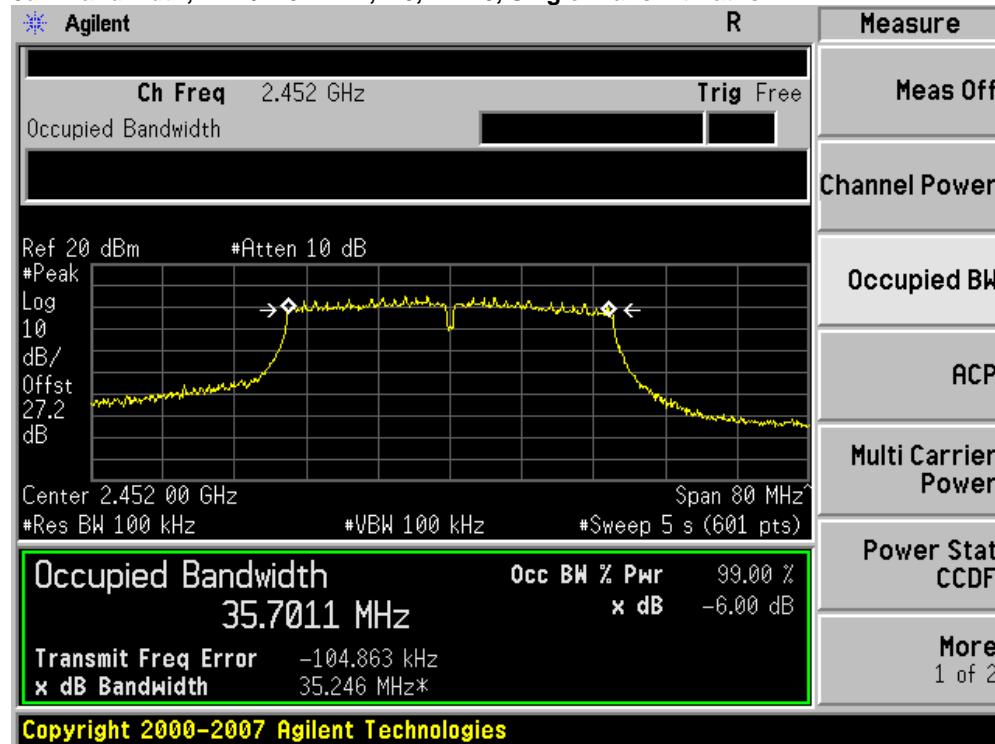

6dB Bandwidth, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

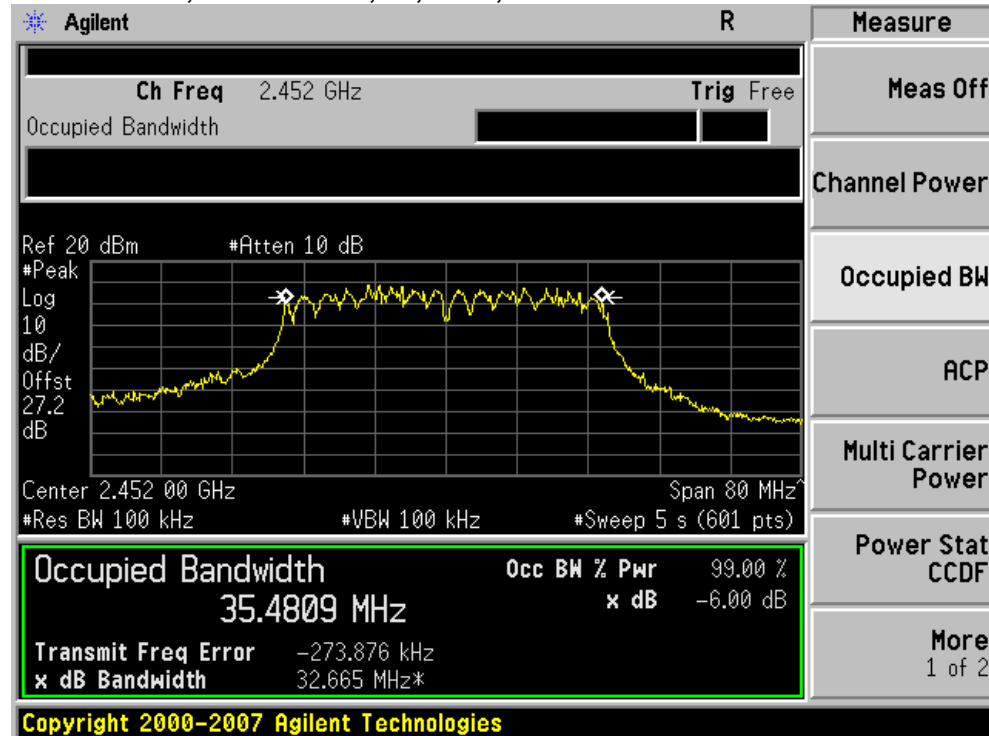



99% and 26dB Bandwidth


Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency: Frequency from table below
 Span: 2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
 Reference Level: 20 dBm
 Attenuation: 10 dB
 Sweep Time: 5 s
 Resolution Bandwidth: 1%-3% of 26 dB Bandwidth
 Video Bandwidth: ≥Resolution Bandwidth
 X dB Bandwidth: 26 dB
 Detector: Peak
 Trace: Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:



Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
2412	Legacy CCK, Single Tx Path	11	16.55	13.27
2412	Legacy CCK, Dual Tx Path	11	16.34	13.64
2412	Non HT-20, Single Tx Path	6	22.47	16.94
2412	Non HT-20, Dual Tx Path	6	21.12	17.36
2412	Non HT-20 Beam Forming	6	20.69	17.29
2437	Legacy CCK, Dual Tx Path	11	14.59	11.79
2437	Non HT-20 Beam Forming	6	21.49	17.53
2462	Legacy CCK, Single Tx Path	11	16.69	13.23
2462	Legacy CCK, Dual Tx Path	11	14.28	11.11
2462	Non HT-20, Single Tx Path	6	22.25	16.9
2462	Non HT-20, Dual Tx Path	6	20.84	15.3
2462	Non HT-20 Beam Forming	6	21.01	17.53
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	41.44	36.20
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	41.68	33.09
2412/2432	HT-40, Single Tx Path	M0	42.76	36.38
2412/2432	HT-40, Dual Tx Path	M0	41.18	35.79
2427/2447	Non HT-40 Duplicate	6	41.41	36.96
2427/2447	HT-40	M0	40.78	35.64
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	42.29	36.13
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	41.64	36.92
2442/2462	HT-40, Single Tx Path	M0	41.08	36.19
2442/2462	HT-40, Dual Tx Path	M0	40.85	35.70

26dB/99% Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

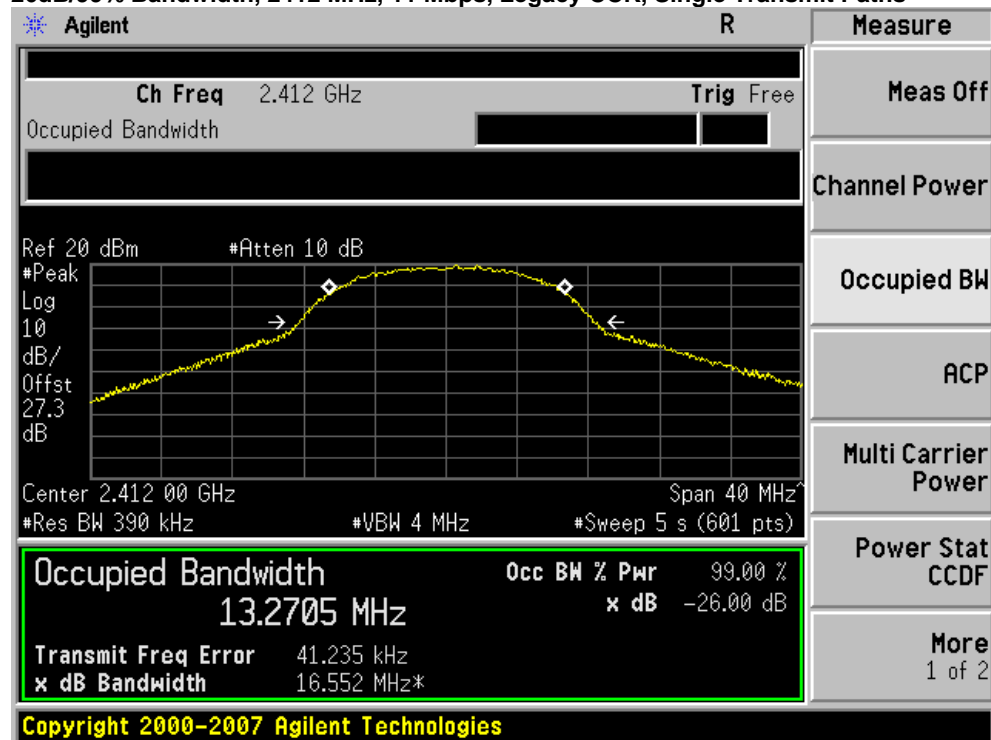


26dB/99% Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

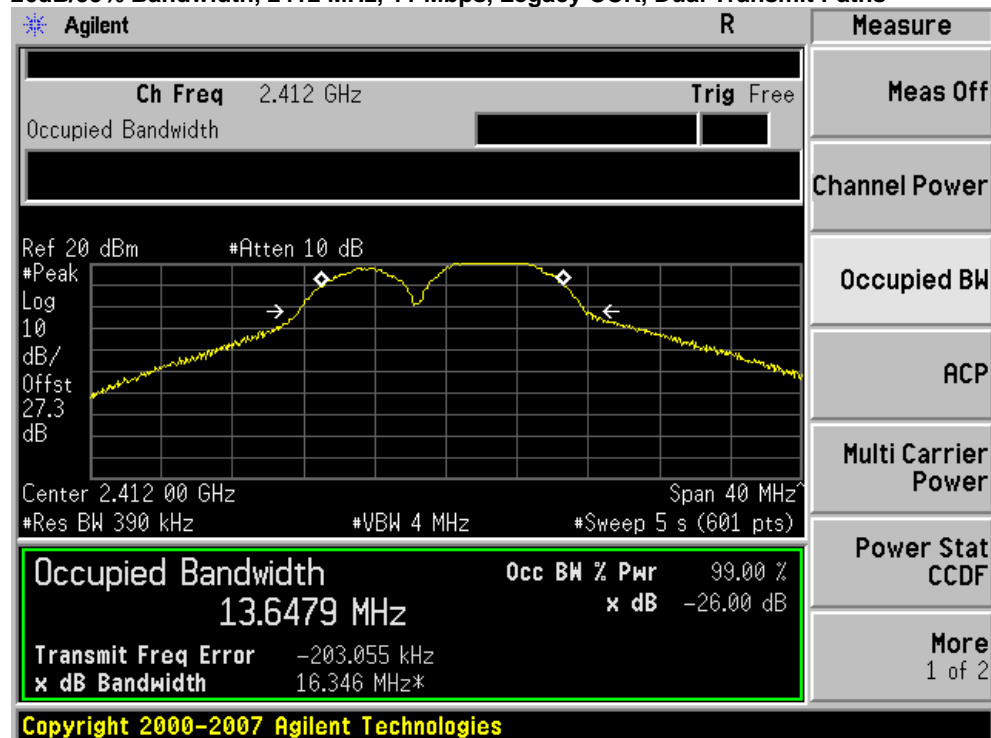


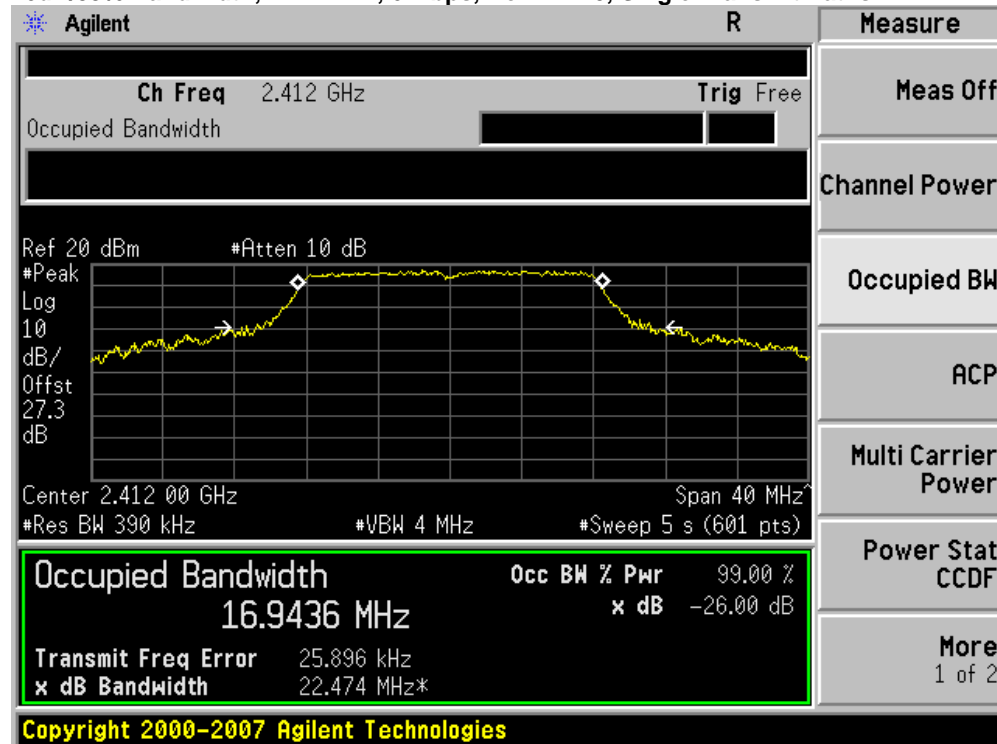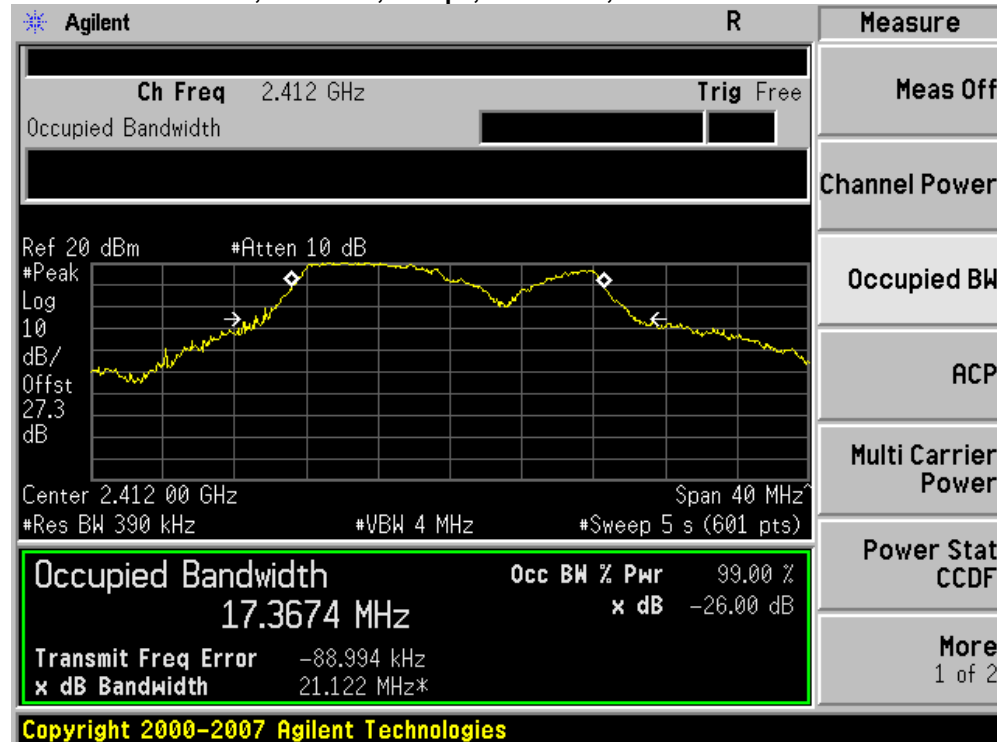26dB/99% Bandwidth, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths**26dB/99% Bandwidth, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths**


26dB/99% Bandwidth, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

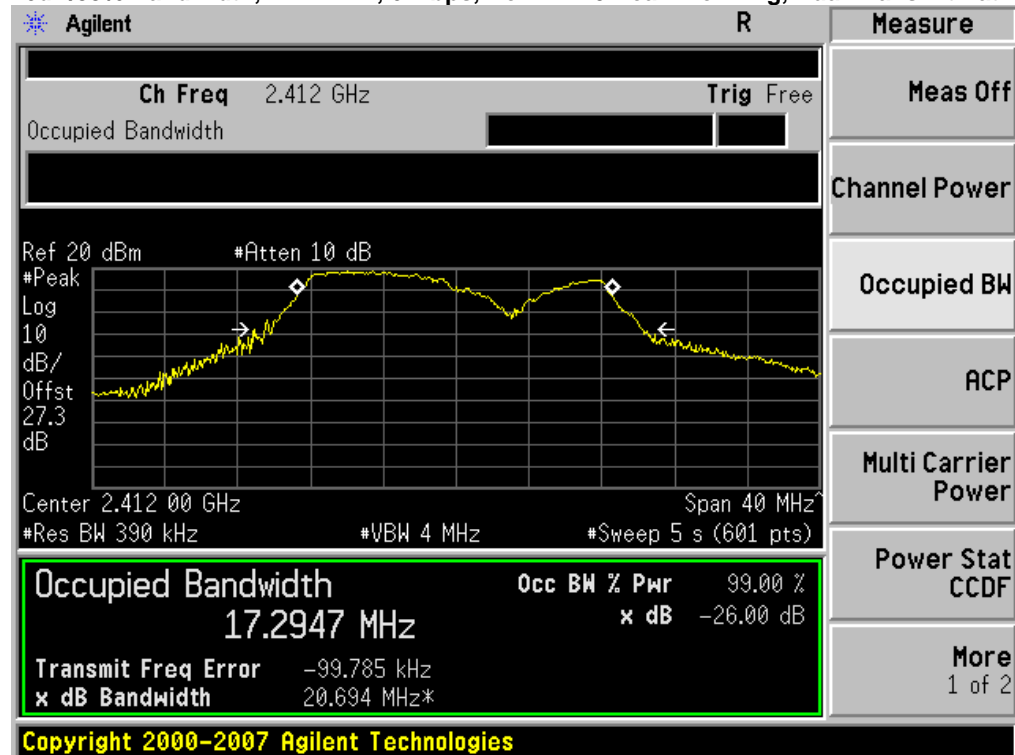


26dB/99% Bandwidth, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

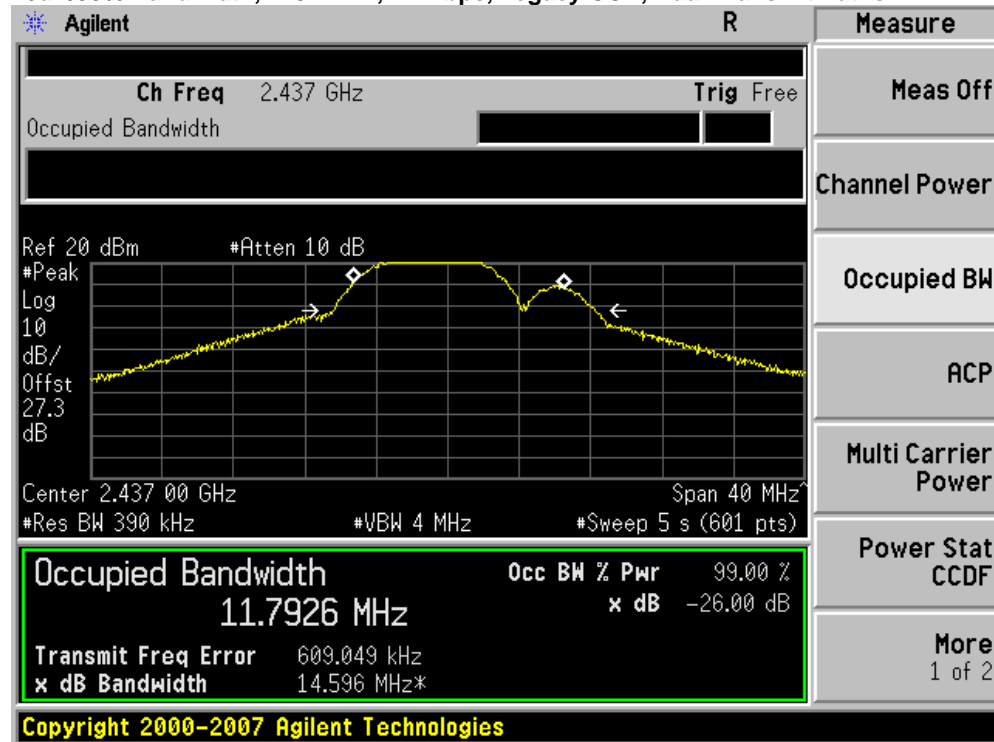


26dB/99% Bandwidth, 2437 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

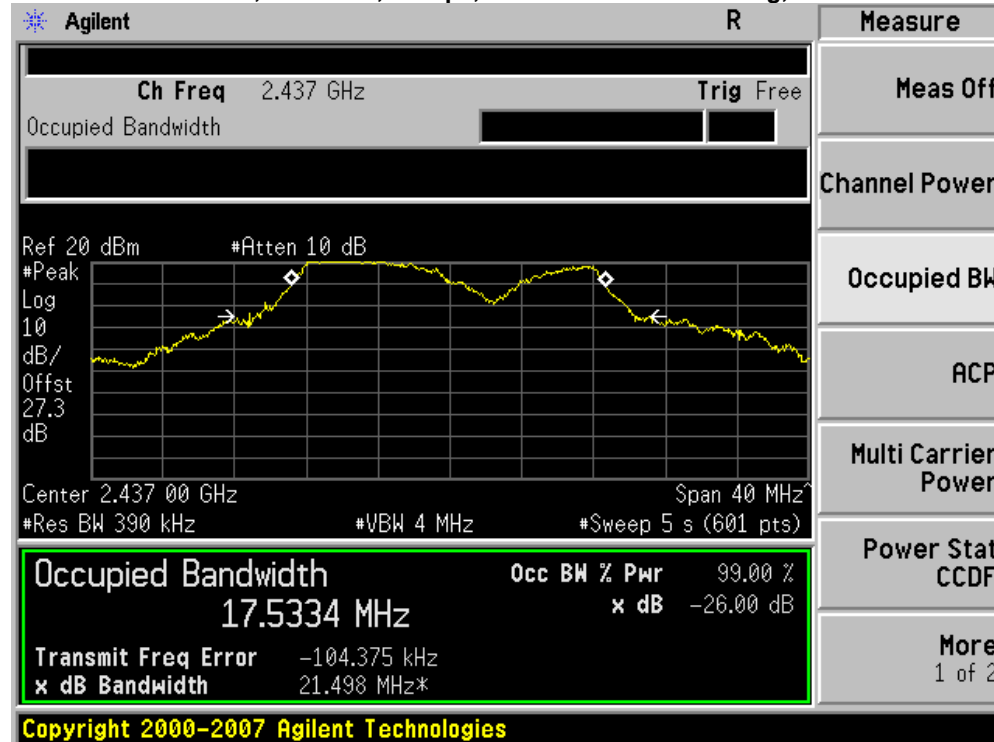

26dB/99% Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

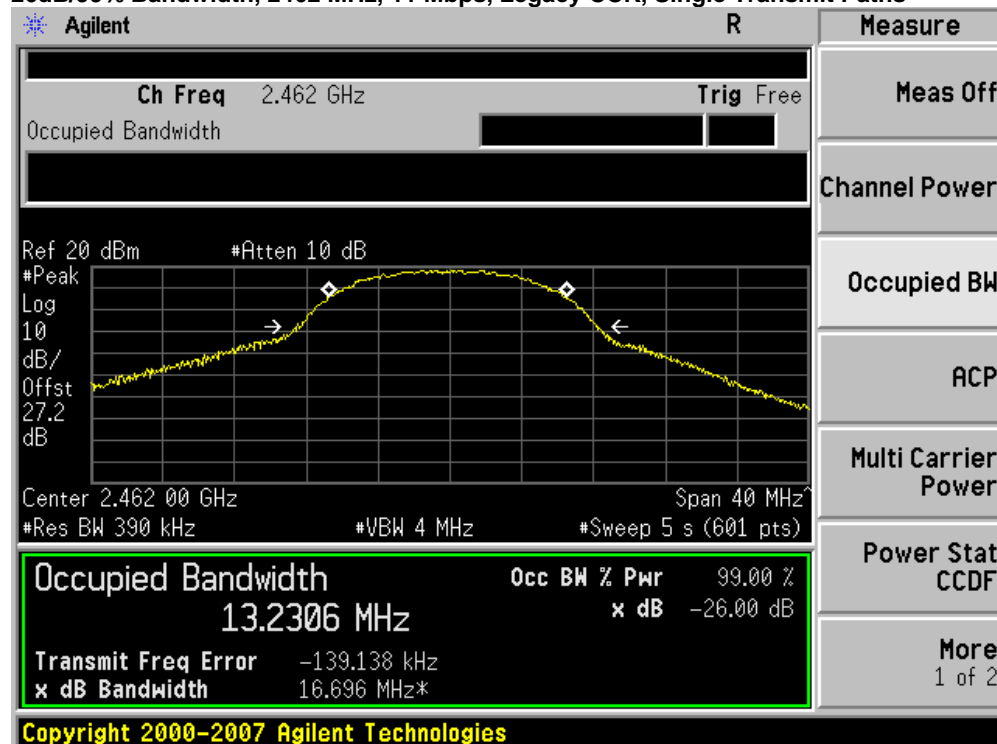


26dB/99% Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

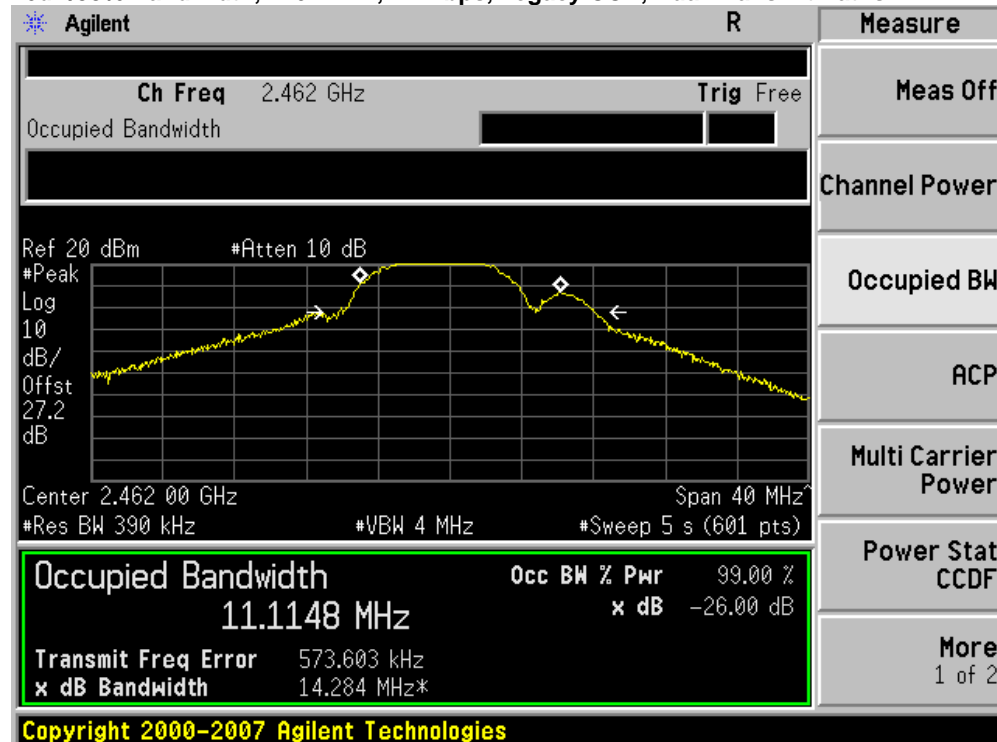





26dB/99% Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

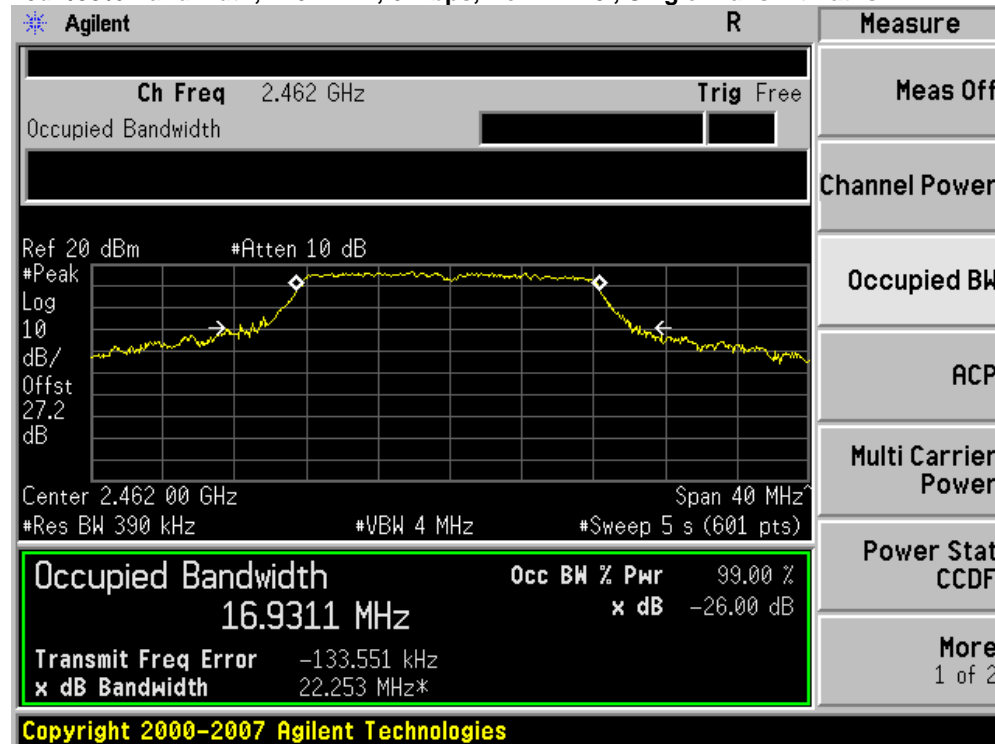


26dB/99% Bandwidth, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

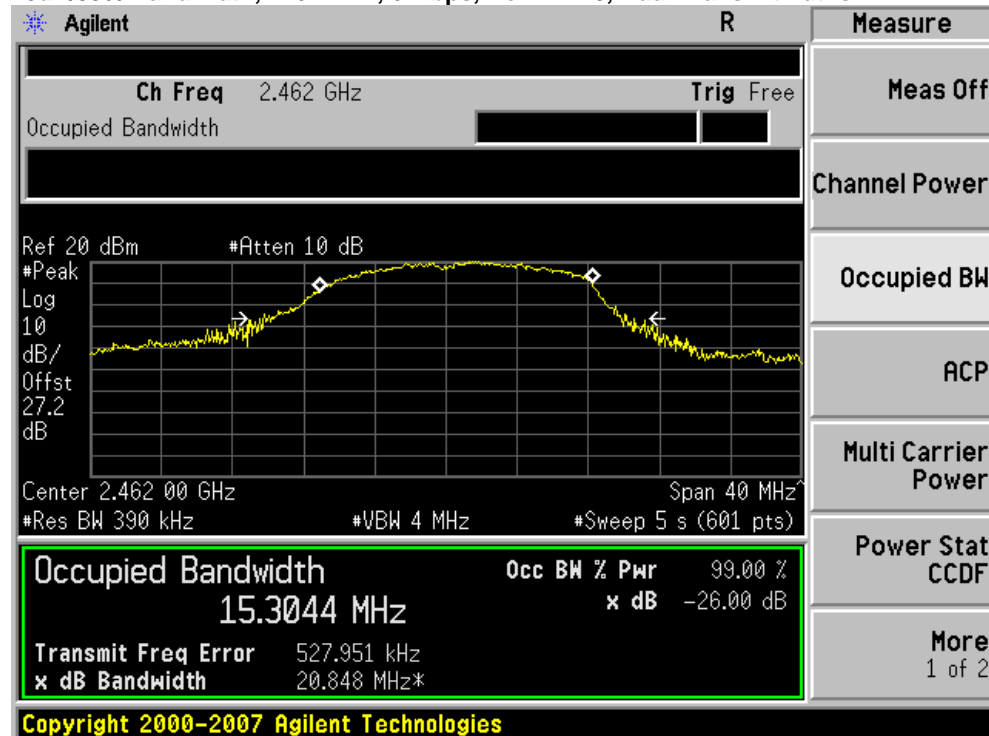


26dB/99% Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

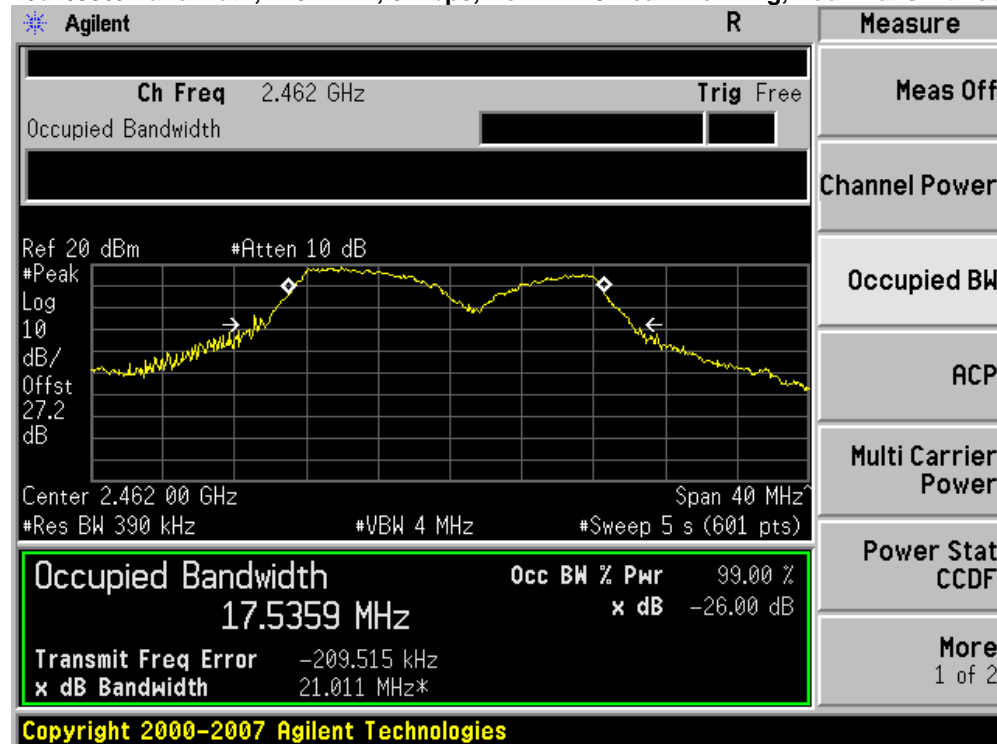


26dB/99% Bandwidth, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

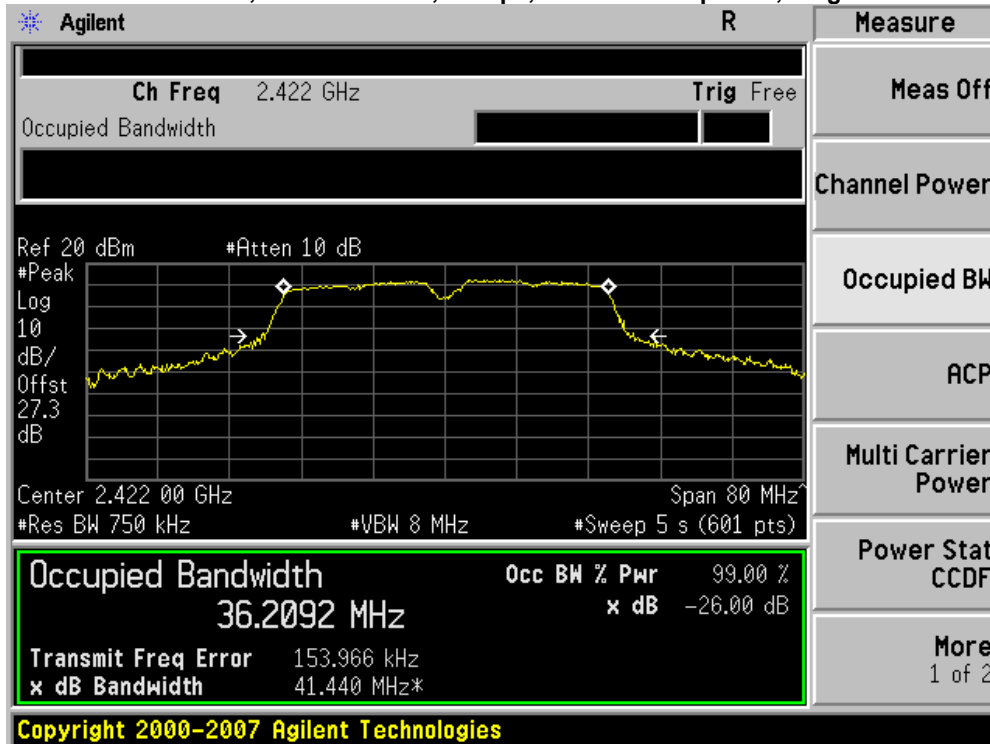


26dB/99% Bandwidth, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

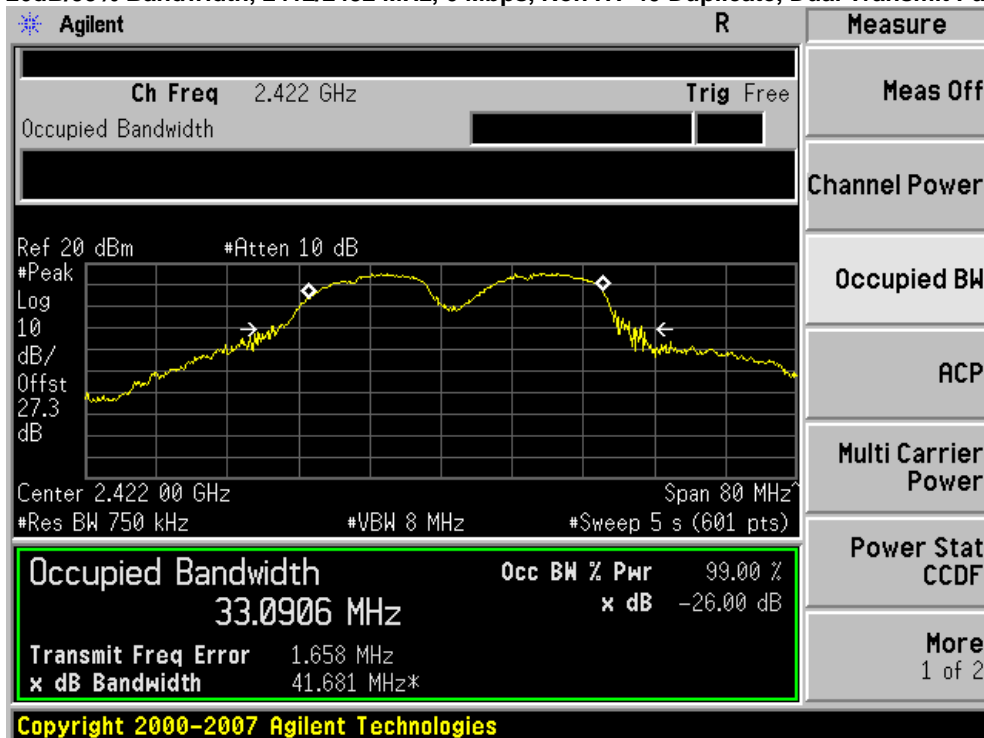


26dB/99% Bandwidth, 2412/2432 MHz, M0, HT-40, Single Transmit Paths

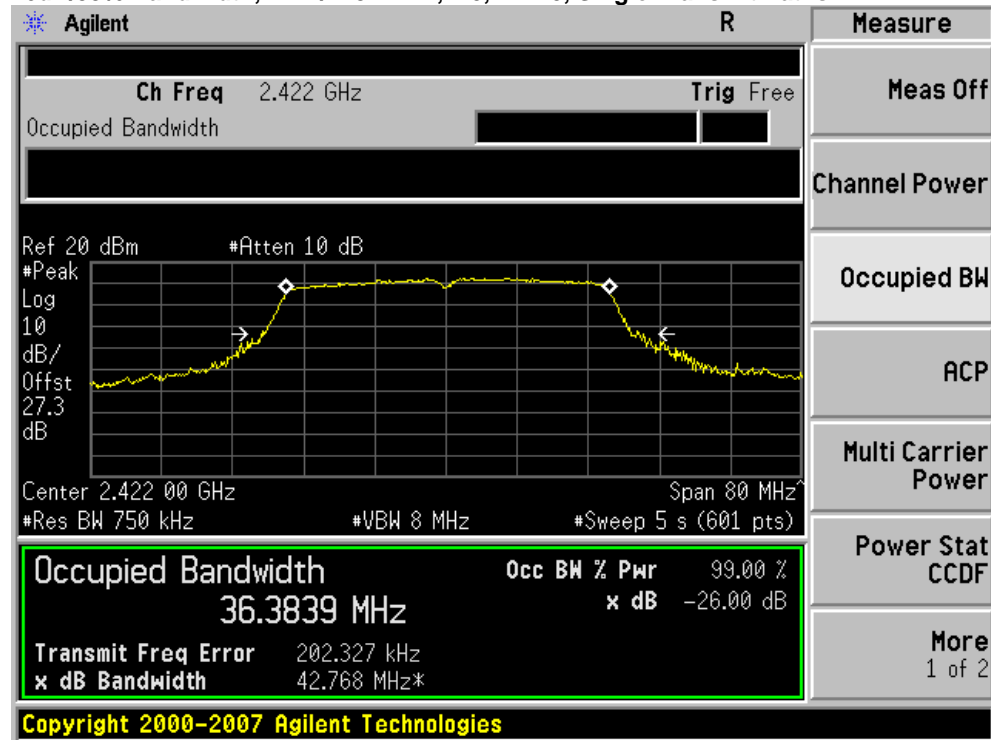


26dB/99% Bandwidth, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

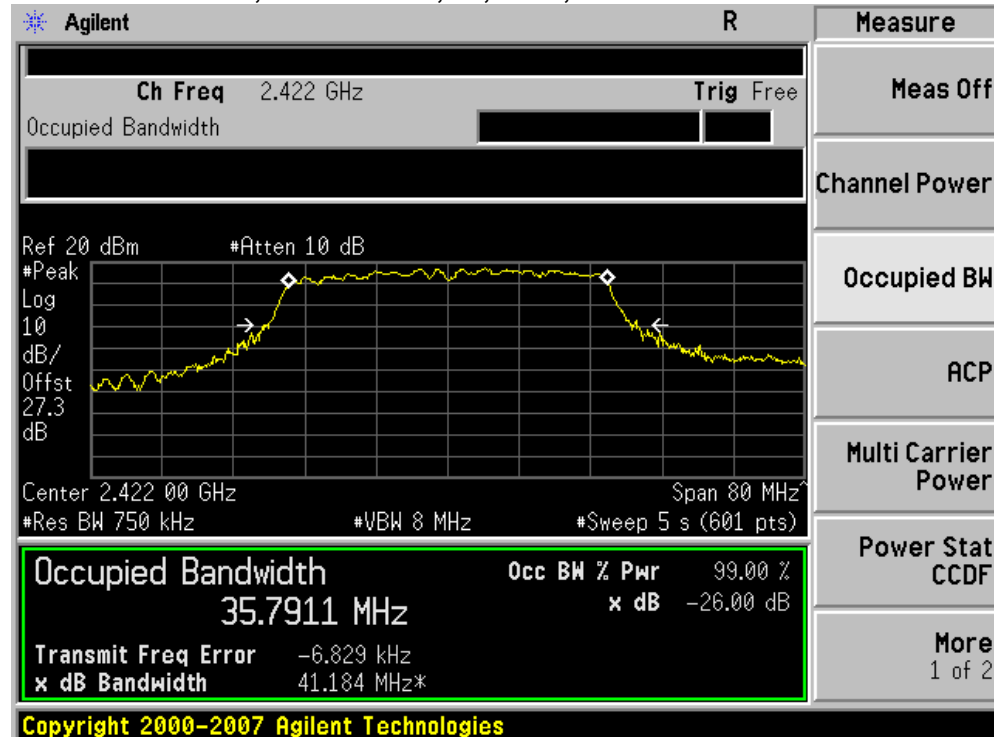

26dB/99% Bandwidth, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

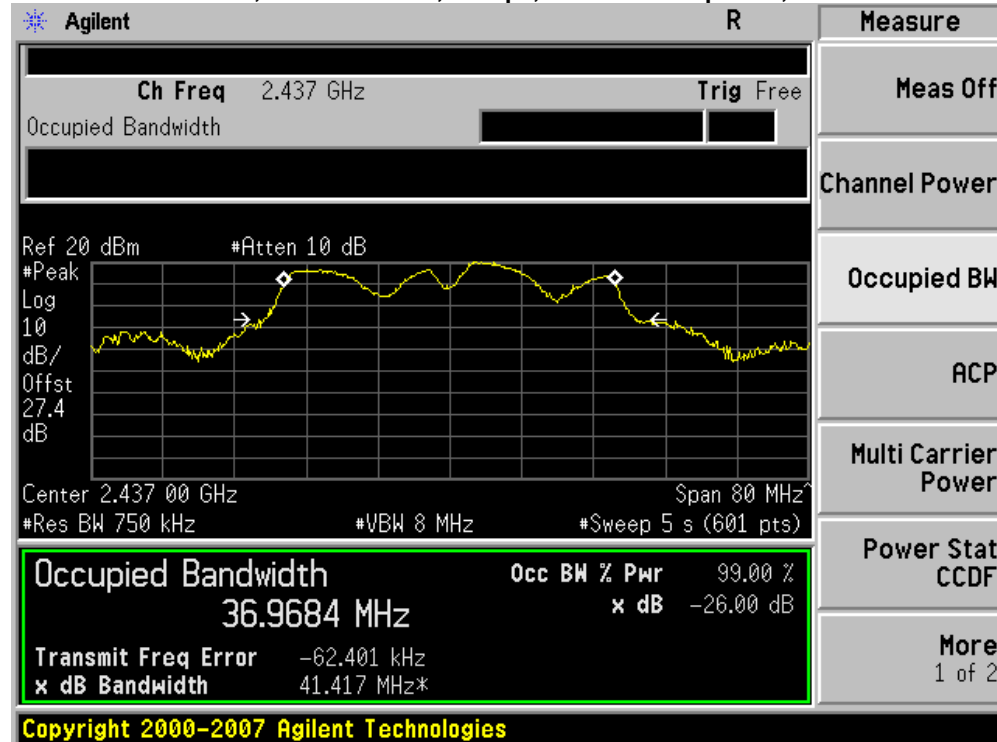


26dB/99% Bandwidth, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

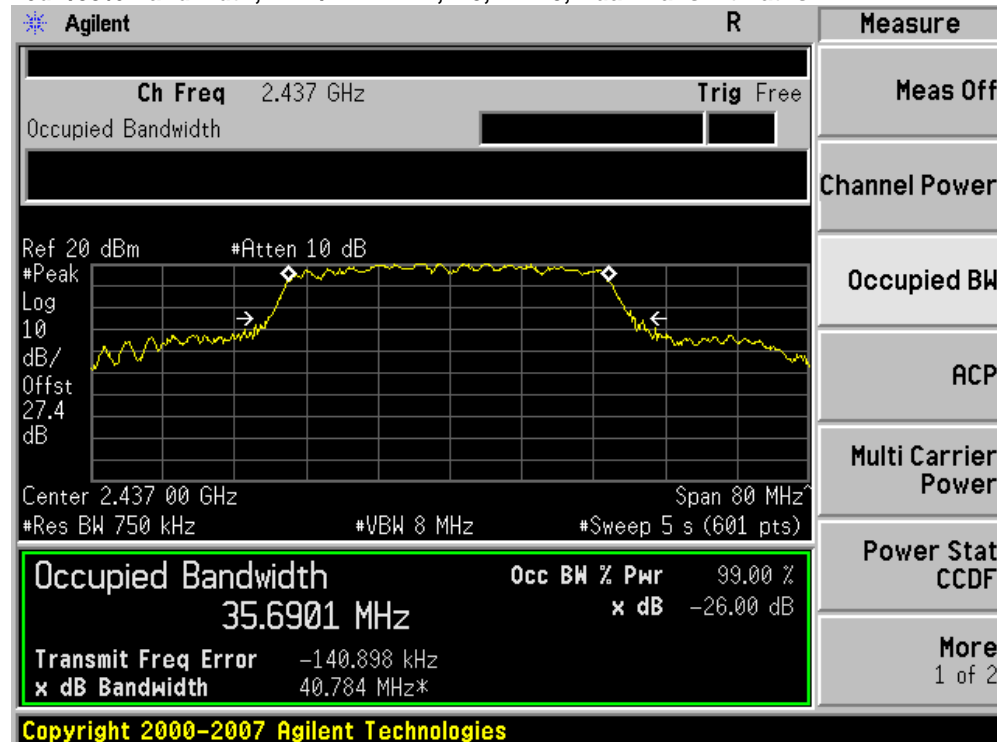





26dB/99% Bandwidth, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

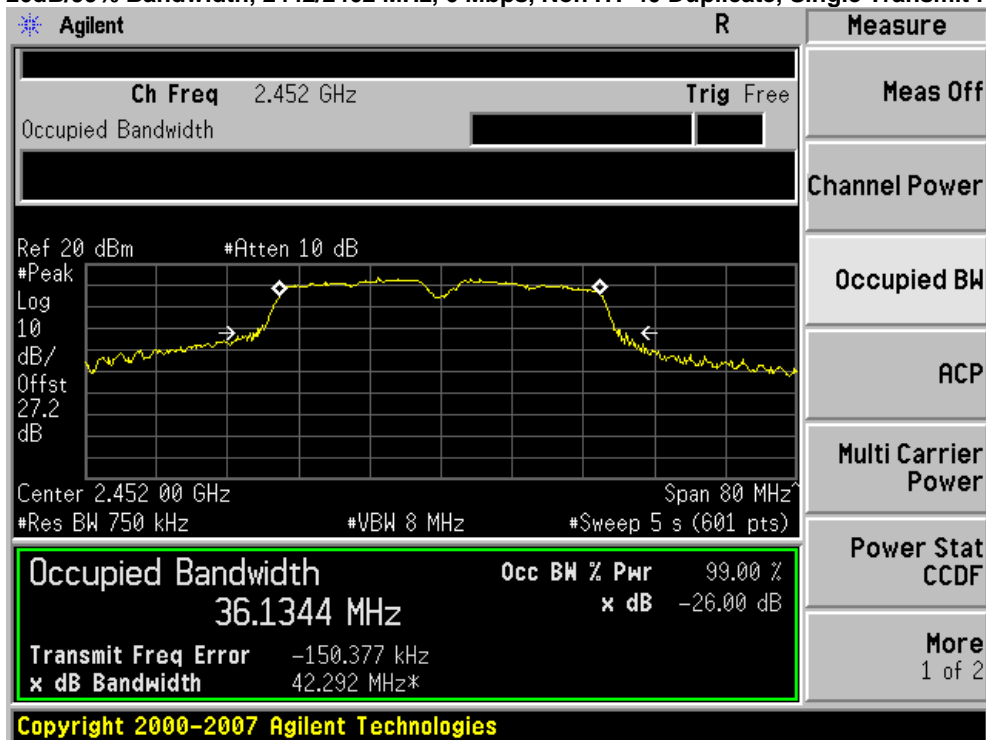

26dB/99% Bandwidth, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

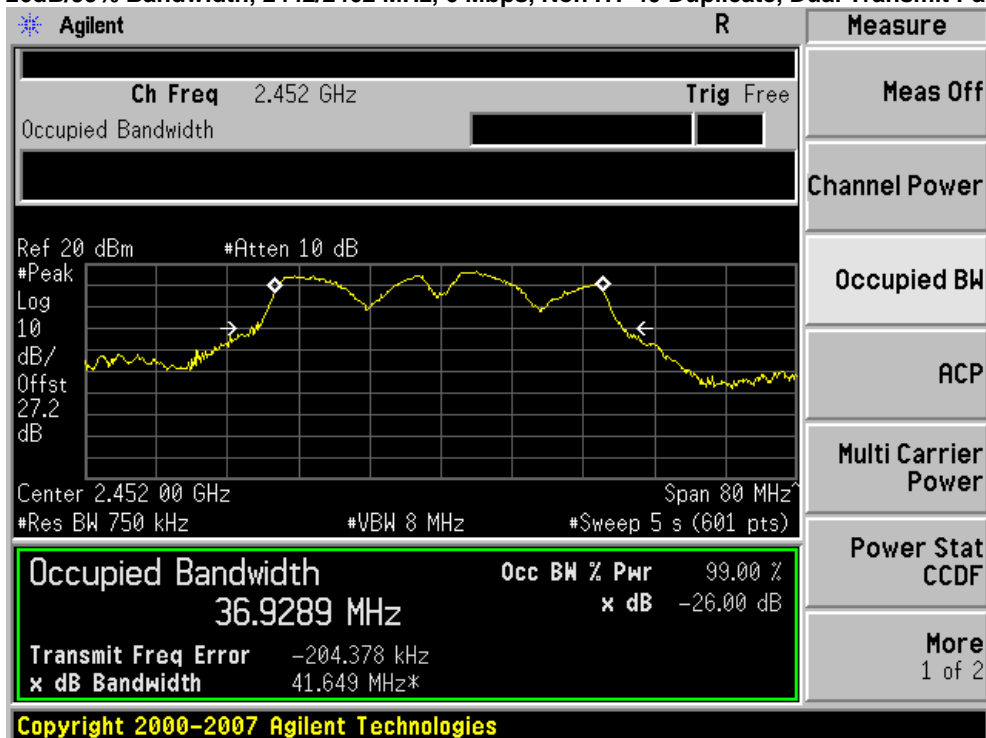

26dB/99% Bandwidth, 2442/2462 MHz, M0, HT-40, Single Transmit Paths

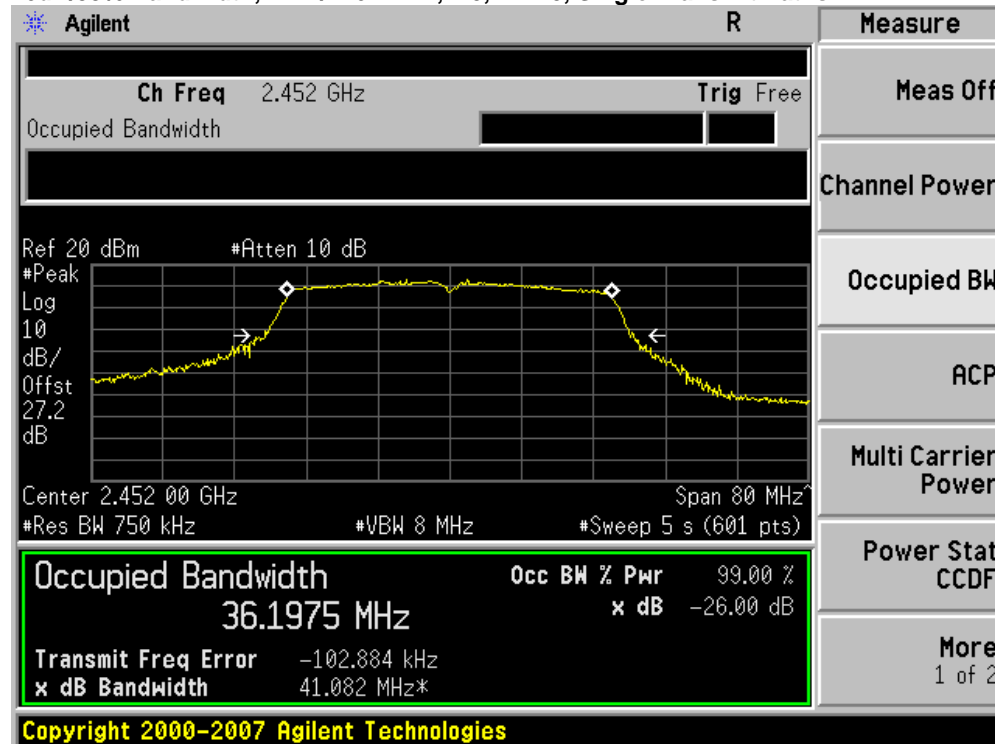

26dB/99% Bandwidth, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths





Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gains are listed in the tables below. The tables also list the calculated Maximum Peak Power for each of the listed gains, as well as the associated Peak Power levels supported by this product. All of the supported power levels comply with the Maximum Peak Power levels.

Antenna Gain (dBi)	Required Power Reduction (dB)	Maximum Peak Power (dBm)	Supported Peak Power (dBm)
2	0	30	28
4	0	30	28

Beam Form Mode Antenna Gain (dBi)	Required Power Reduction (dB)	Maximum Peak Power (dBm)	Supported Peak Power (dBm)
5	0	30	28
7	1	29	28




Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer
 Center Frequency: Frequency from table below
 Span: 20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
 Ref Level Offset: Correct for attenuator and cable loss.
 Reference Level: 20 dBm
 Attenuation: 20 dB
 Sweep Time: 100ms, Single sweep
 Resolution Bandwidth: 1 MHz
 Video Bandwidth: 3 MHz
 Detector: Sample
 Trace: Trace Average 100 traces in Power Averaging Mode
 Integration BW: =26 dB BW from 26 dB Bandwidth Data


After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

Frequency (MHz)	Mode	Data Rate (Mbps)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	23.7	27.5	3.8
2412	Legacy CCK, Dual Tx Path	11	26.7	27.5	0.8
2412	Non HT-20, Single Tx Path	6	24.1	27.5	3.4
2412	Non HT-20, Dual Tx Path	6	25.3	27.5	2.2
2412	Non HT-20 Beam Forming	6	23.4	26.5	3.1
2437	Legacy CCK, Dual Tx Path	11	27.2	27.5	0.3
2437	Non HT-20 Beam Forming	6	26.1	26.5	0.4
2462	Legacy CCK, Single Tx Path	11	23.3	27.5	4.2
2462	Legacy CCK, Dual Tx Path	11	27.1	27.5	0.4
2462	Non HT-20, Single Tx Path	6	23.5	27.5	4.1
2462	Non HT-20, Dual Tx Path	6	25.4	27.5	2.1
2462	Non HT-20 Beam Forming	6	22.8	26.5	3.7
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	19.1	27.5	8.4
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	20.6	27.5	6.9
2412/2432	HT-40, Single Tx Path	m0	19.6	27.5	7.9
2412/2432	HT-40, Dual Tx Path	m0	22.4	27.5	5.1
2427/2447	Non HT-40 Duplicate	6	23.5	27.5	4.0
2427/2447	HT-40	m0	25.9	27.5	1.6
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	19.5	27.5	8.0
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	20.3	27.5	7.2
2442/2462	HT-40, Single Tx Path	m0	19.1	27.5	8.4
2442/2462	HT-40, Dual Tx Path	m0	20.9	27.5	6.6


Peak Power, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

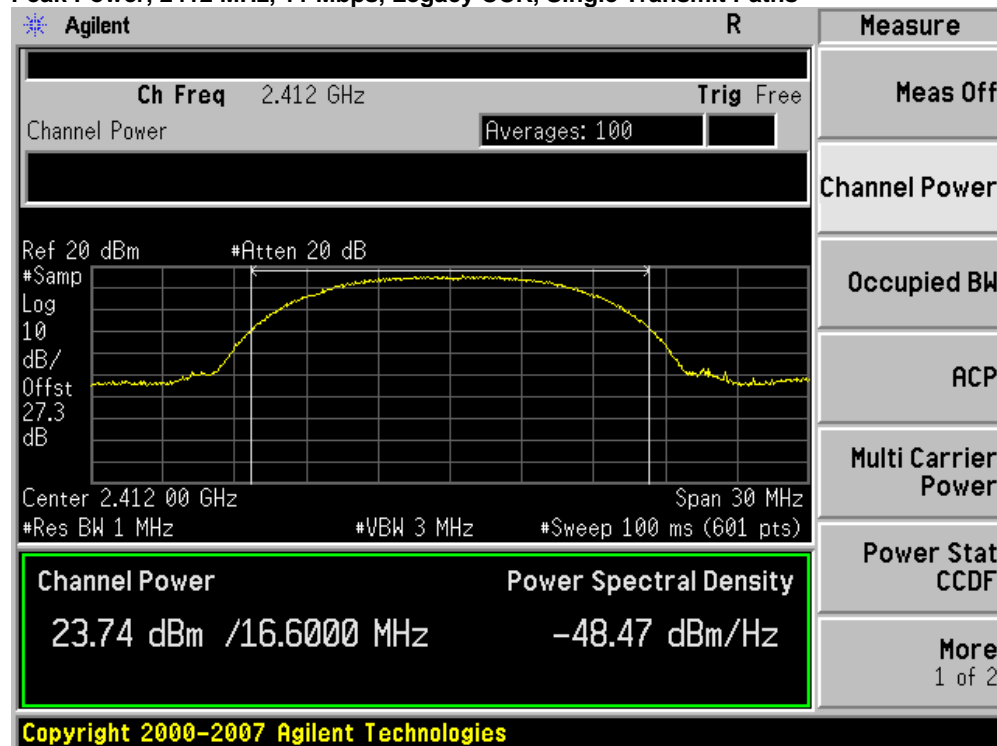


Peak Power, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

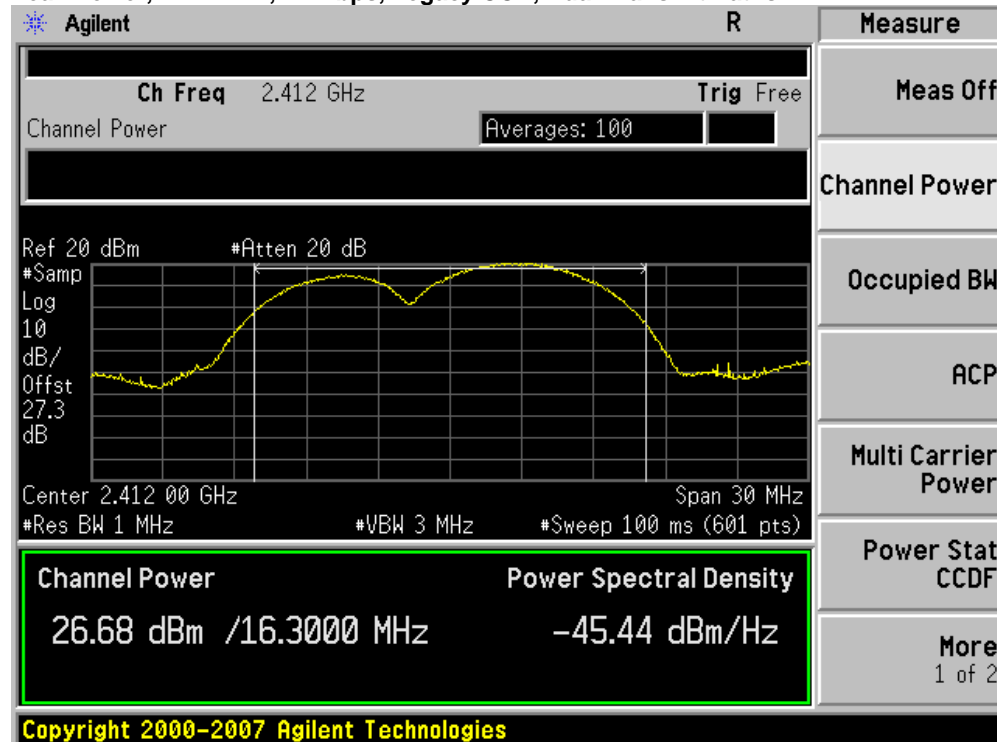


Peak Power, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

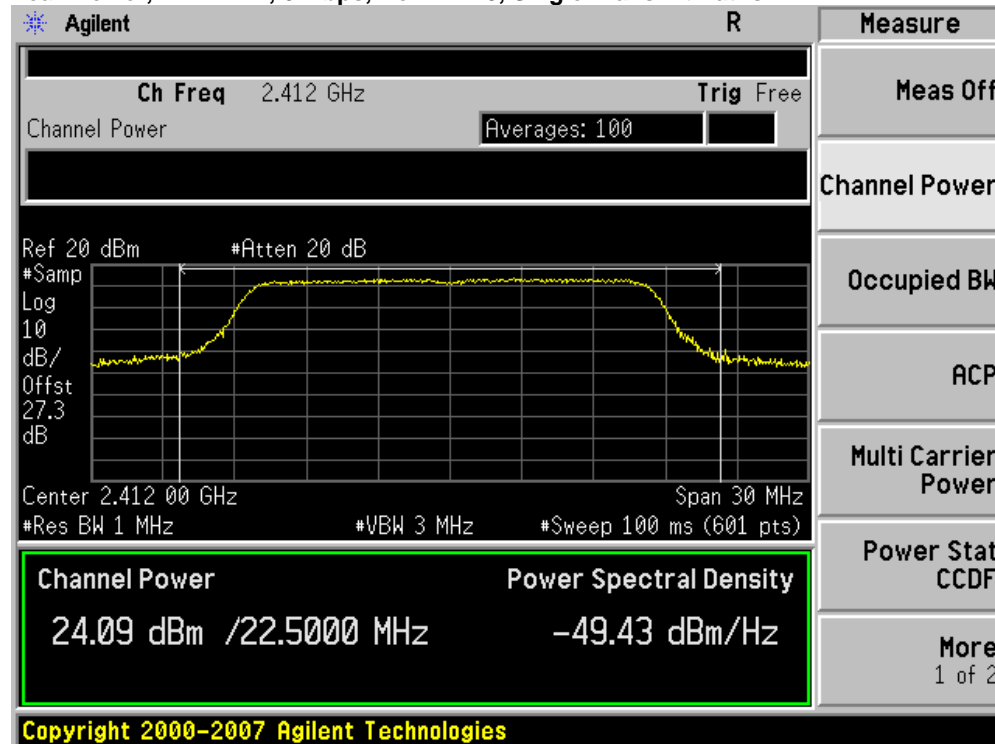


Peak Power, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

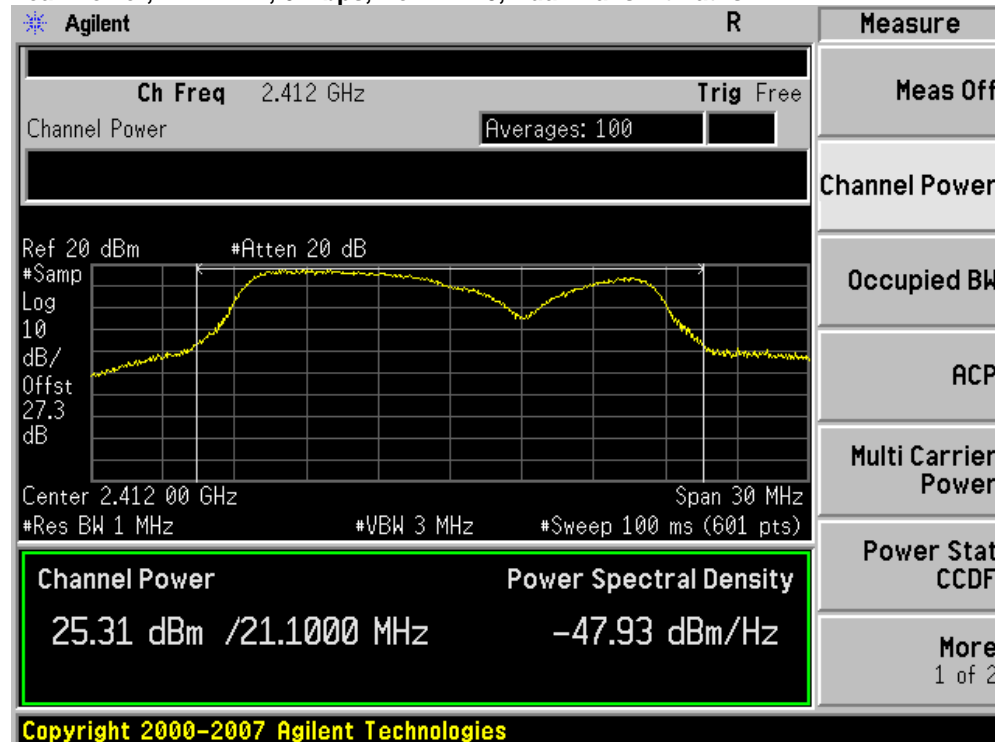


Peak Power, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

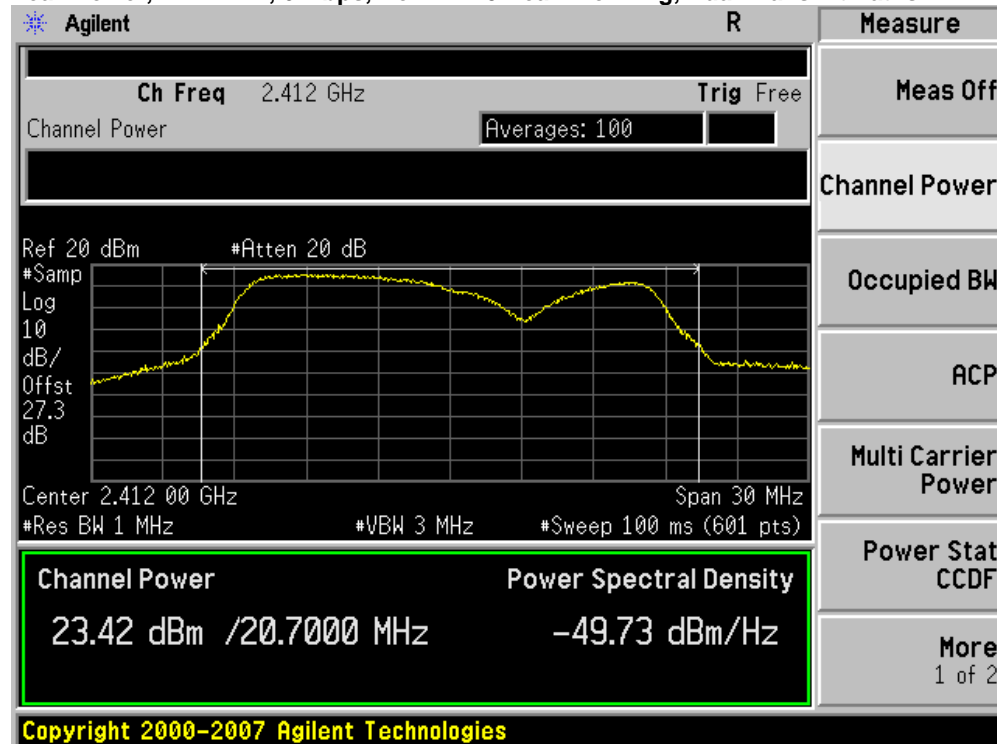


Peak Power, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

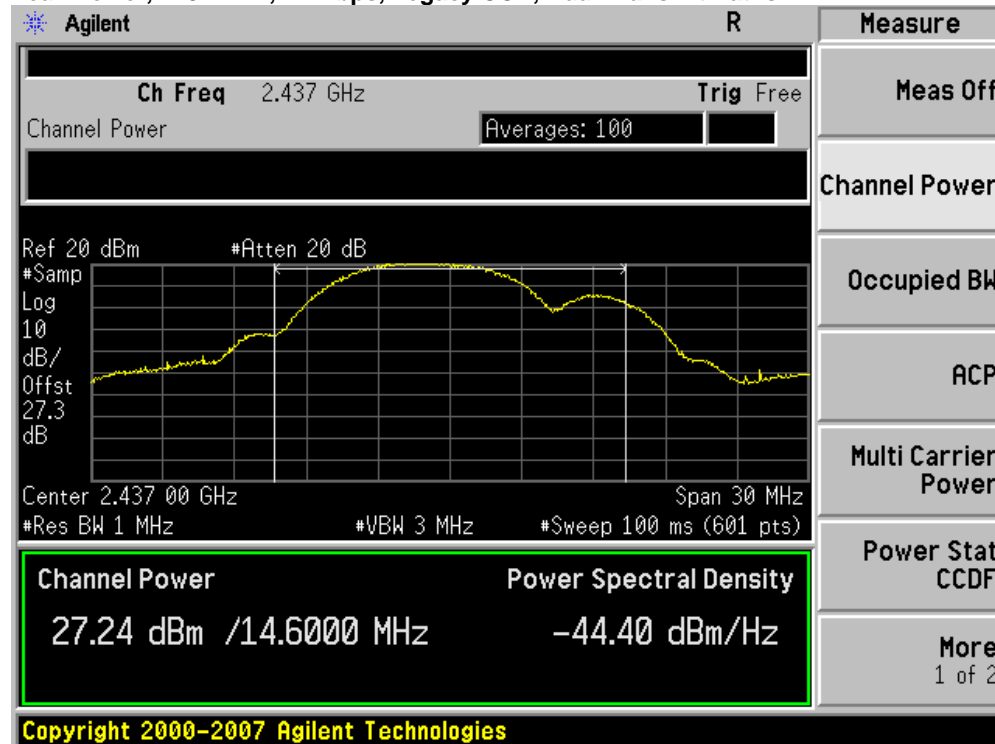


Peak Power, 2437 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

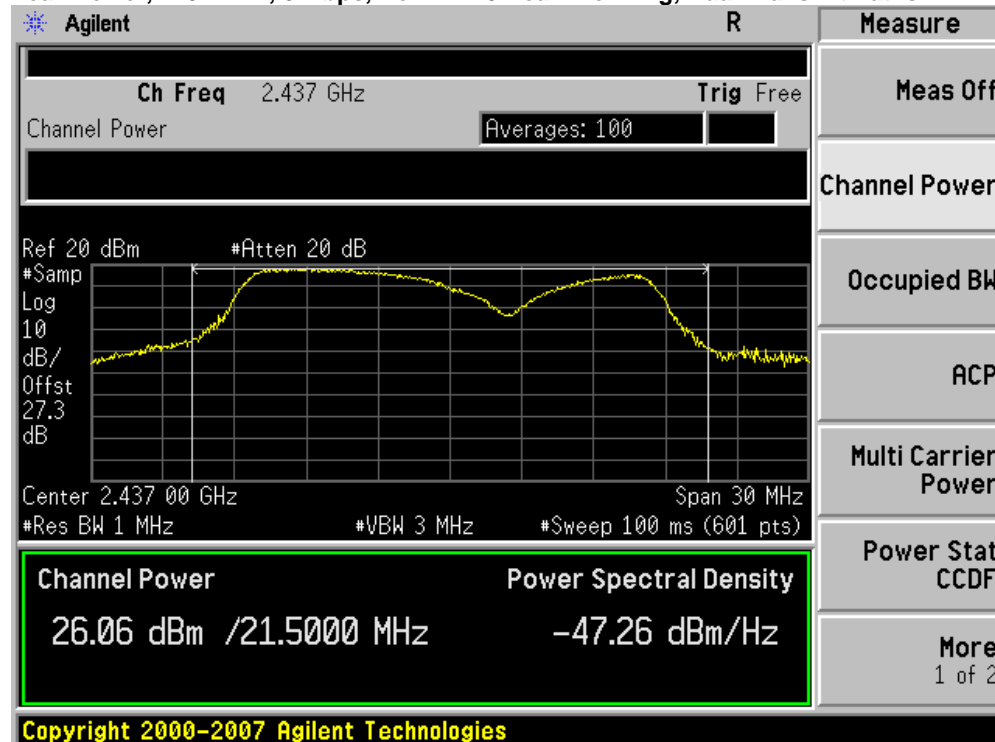


Peak Power, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

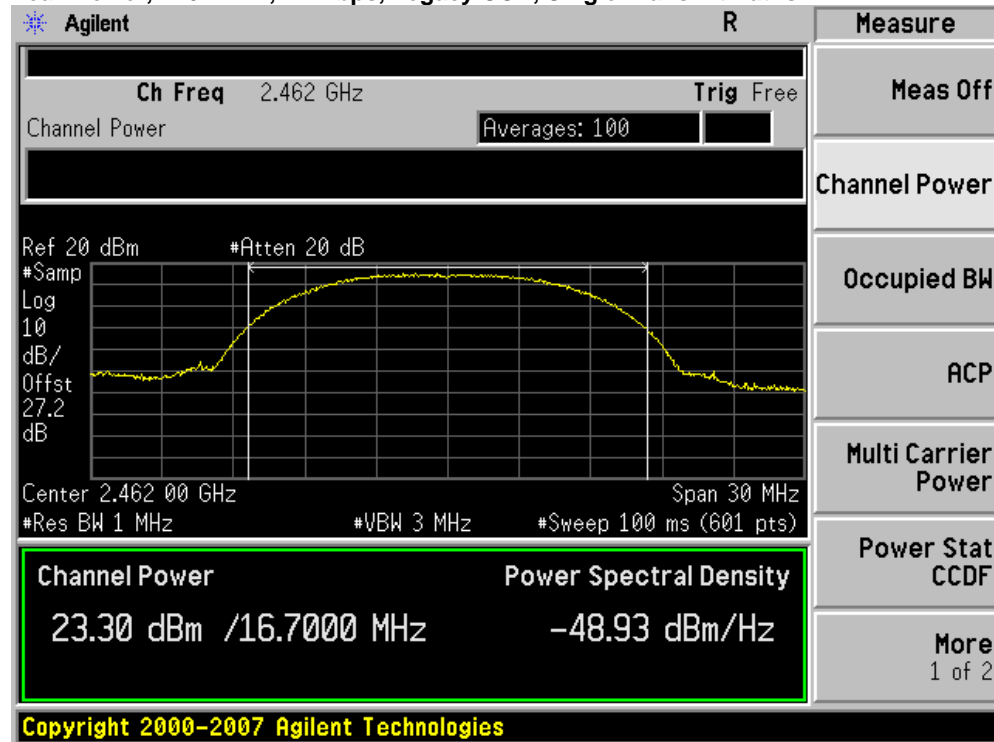


Peak Power, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

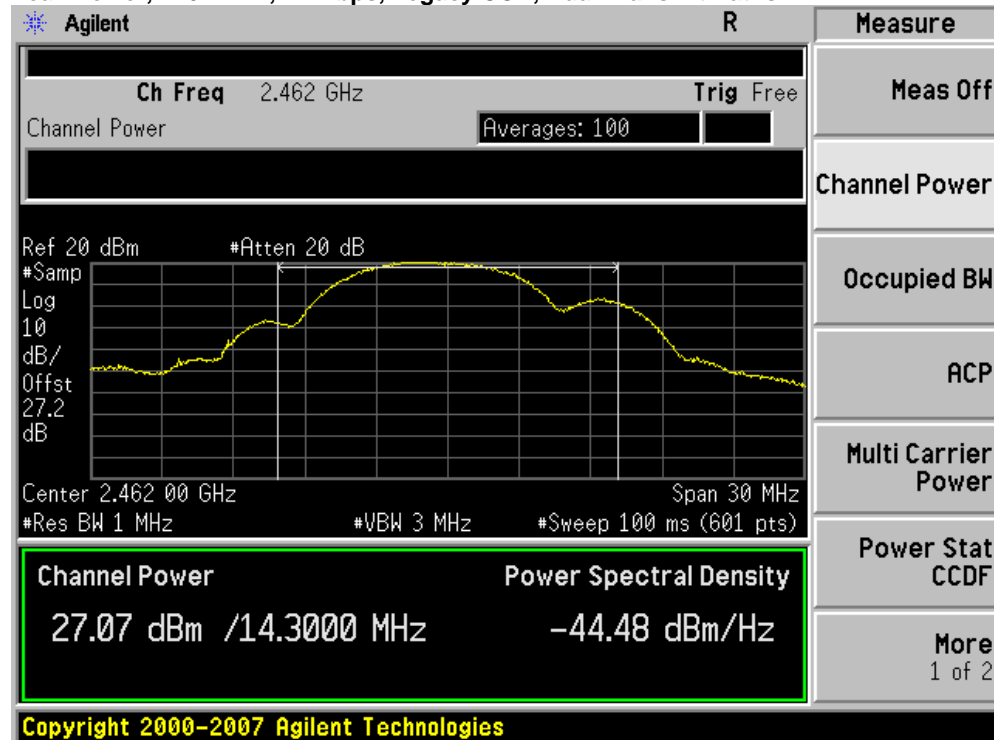


Peak Power, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

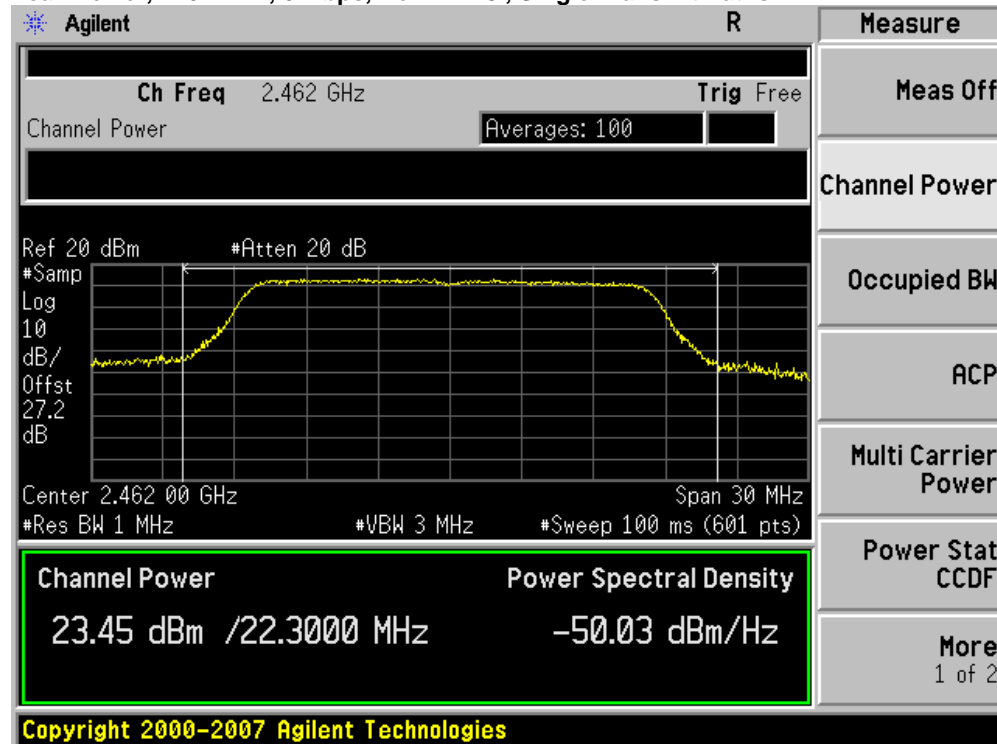


Peak Power, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

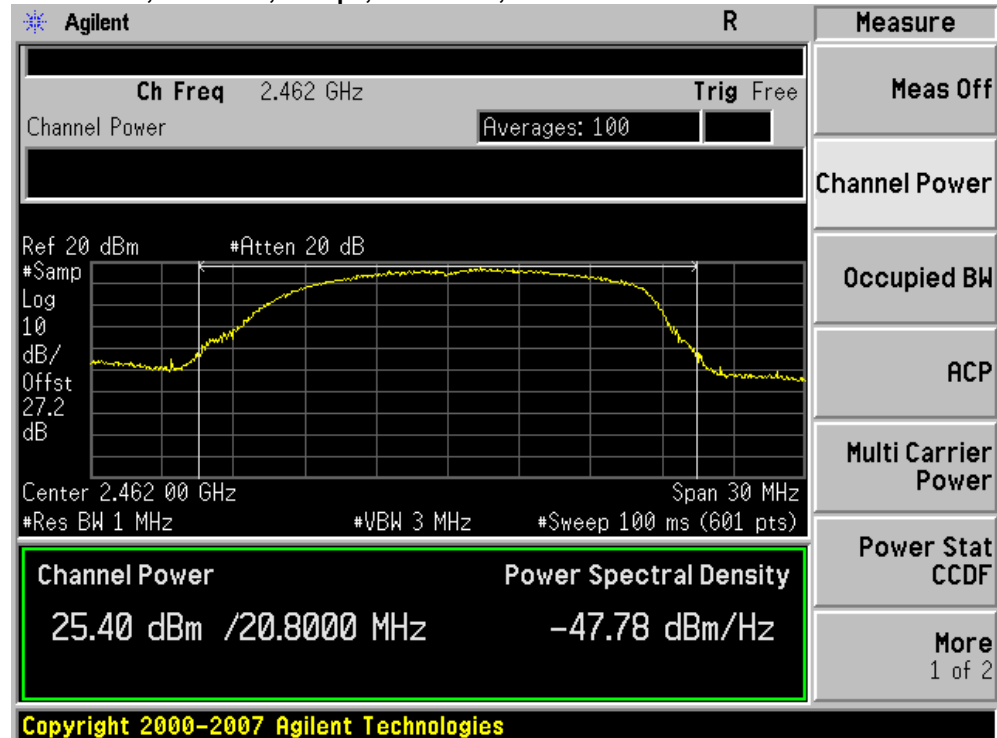


Peak Power, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

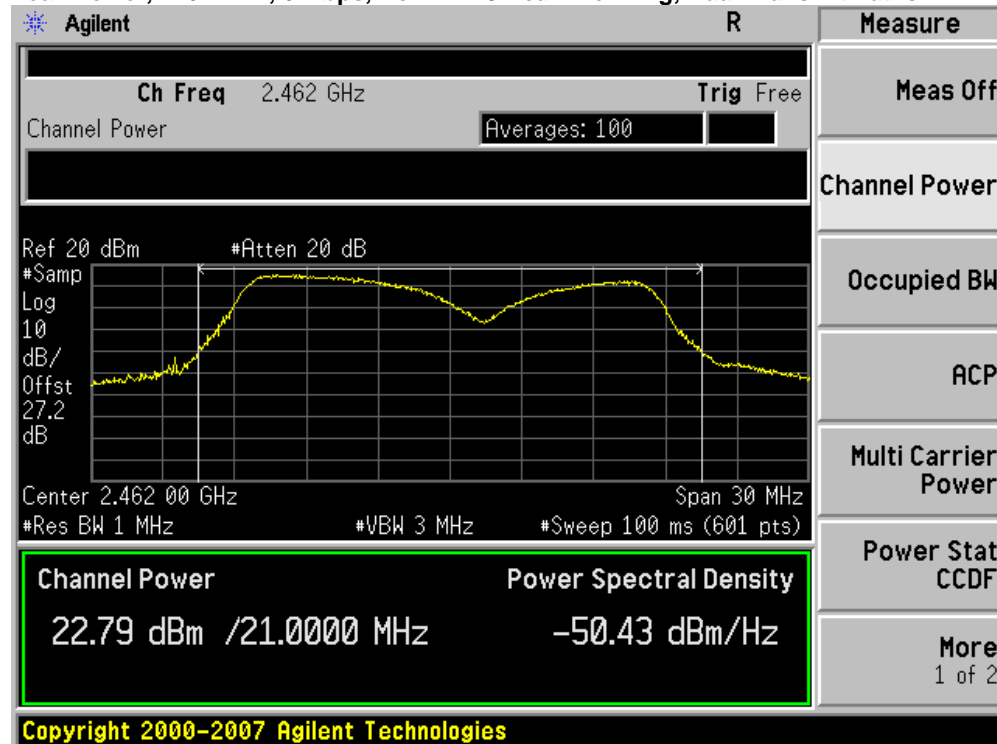


Peak Power, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

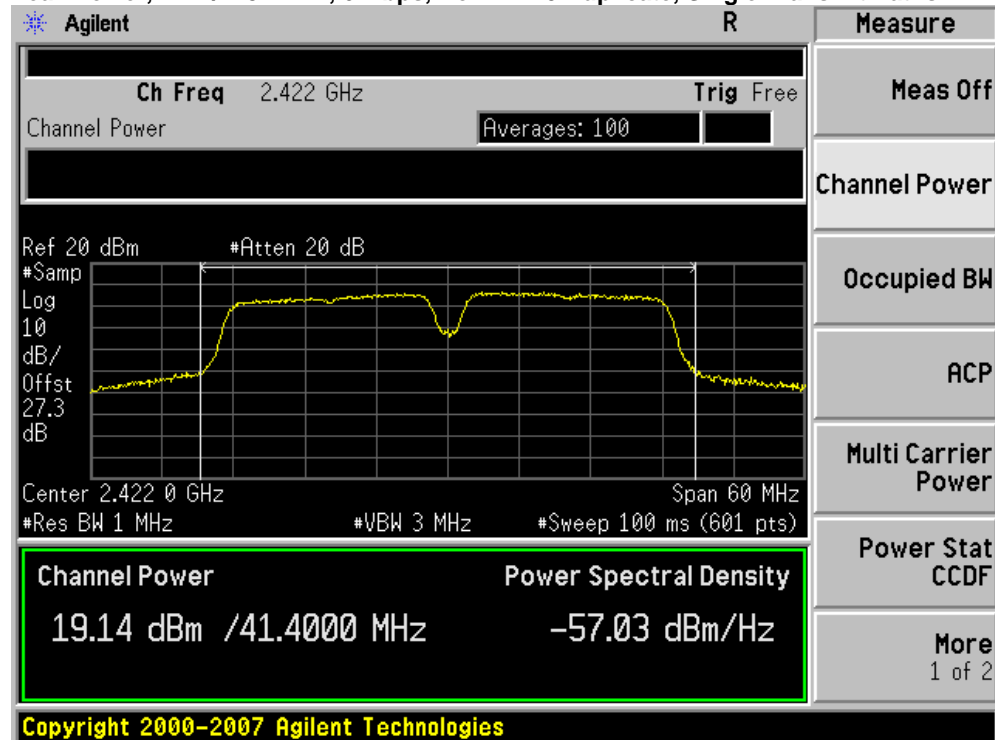


Peak Power, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

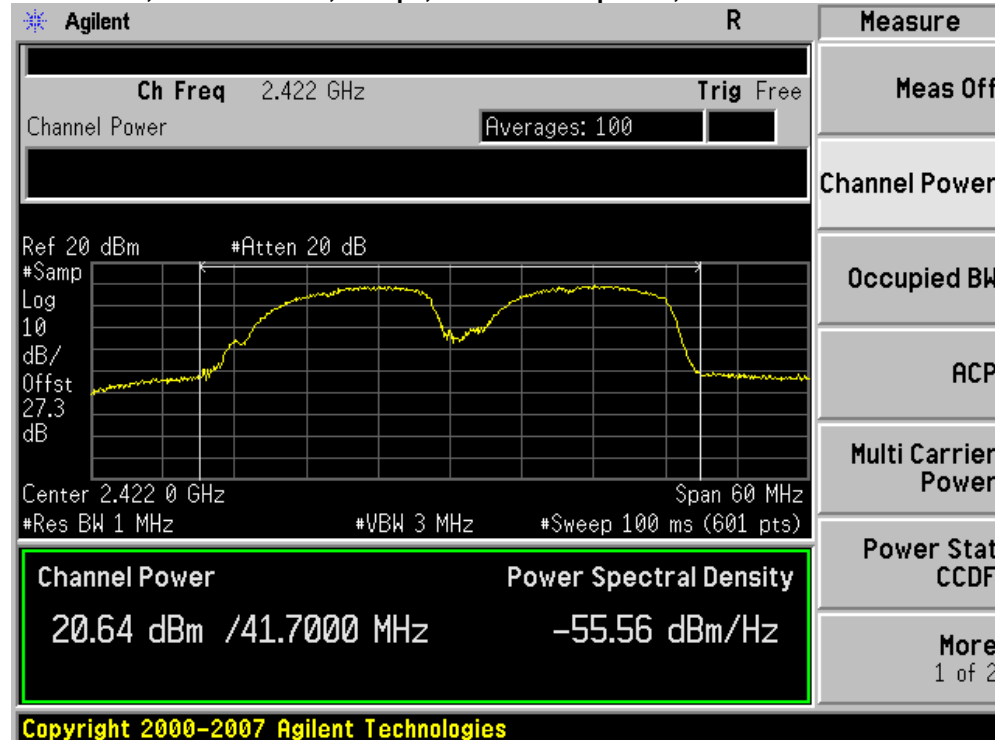


Peak Power, 2412/2432 MHz, M0, HT-40, Single Transmit Paths

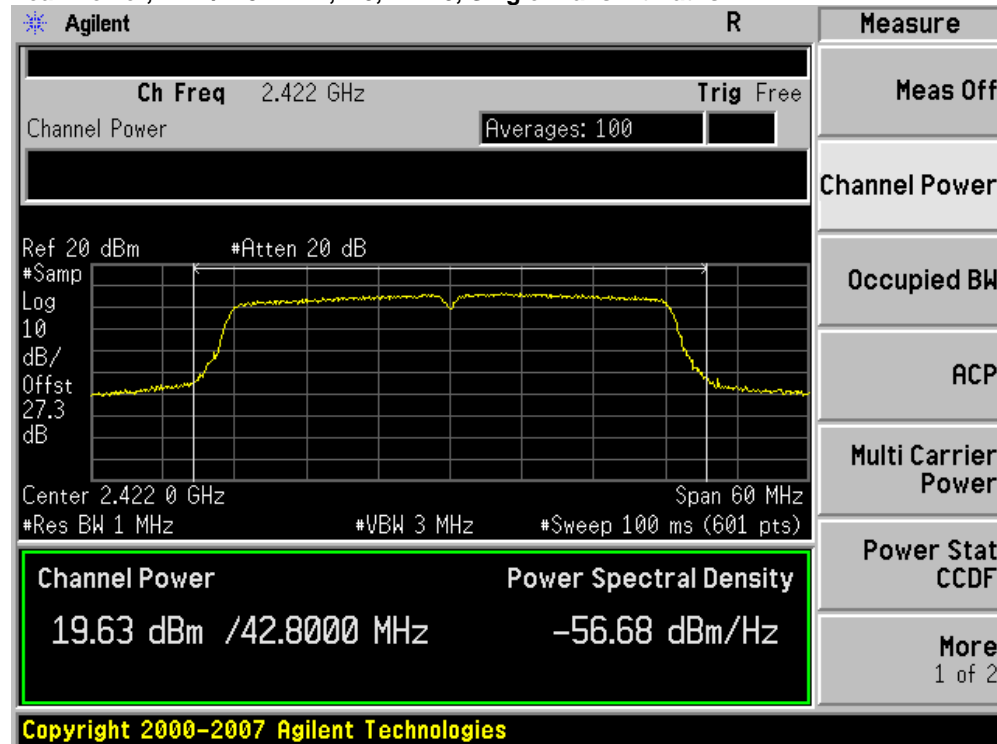


Peak Power, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

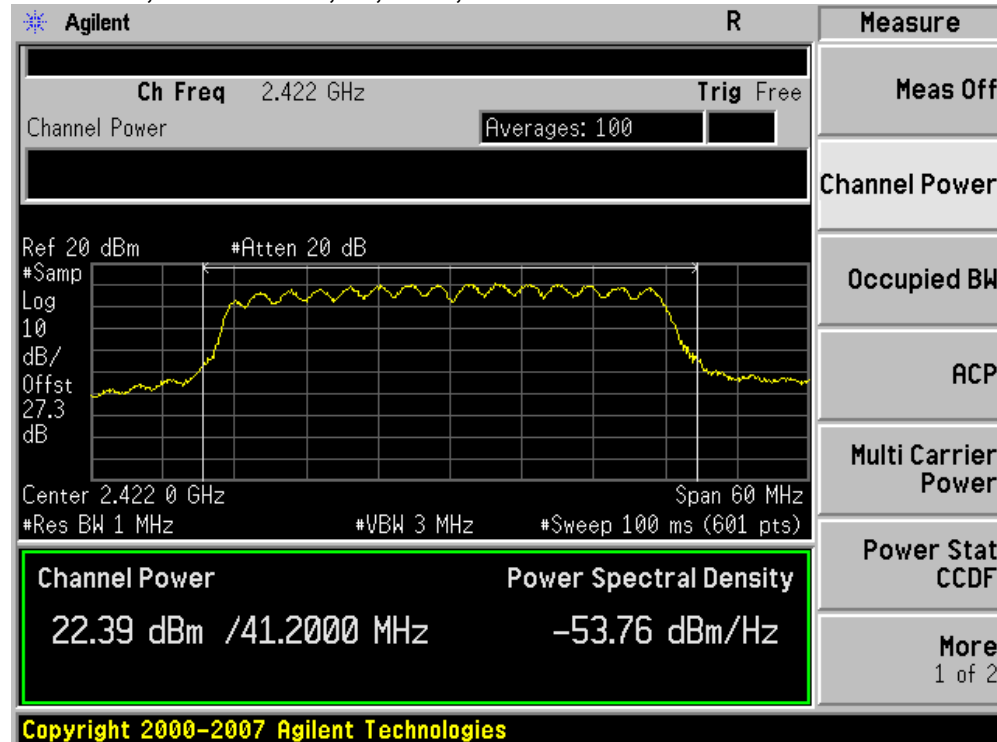

Peak Power, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

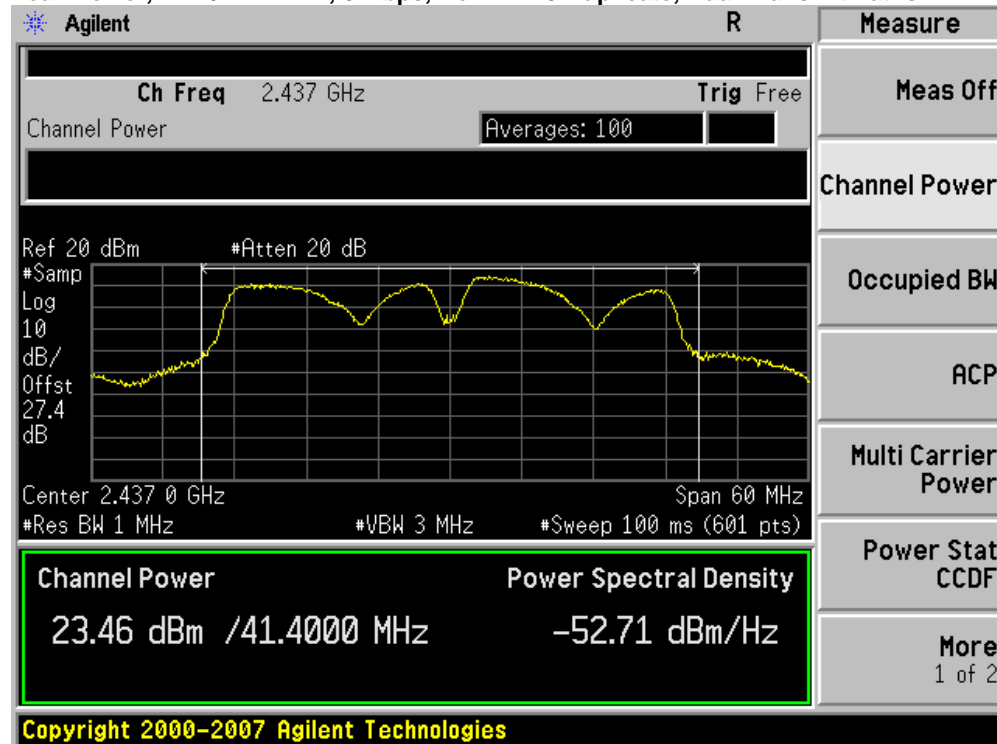


Peak Power, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

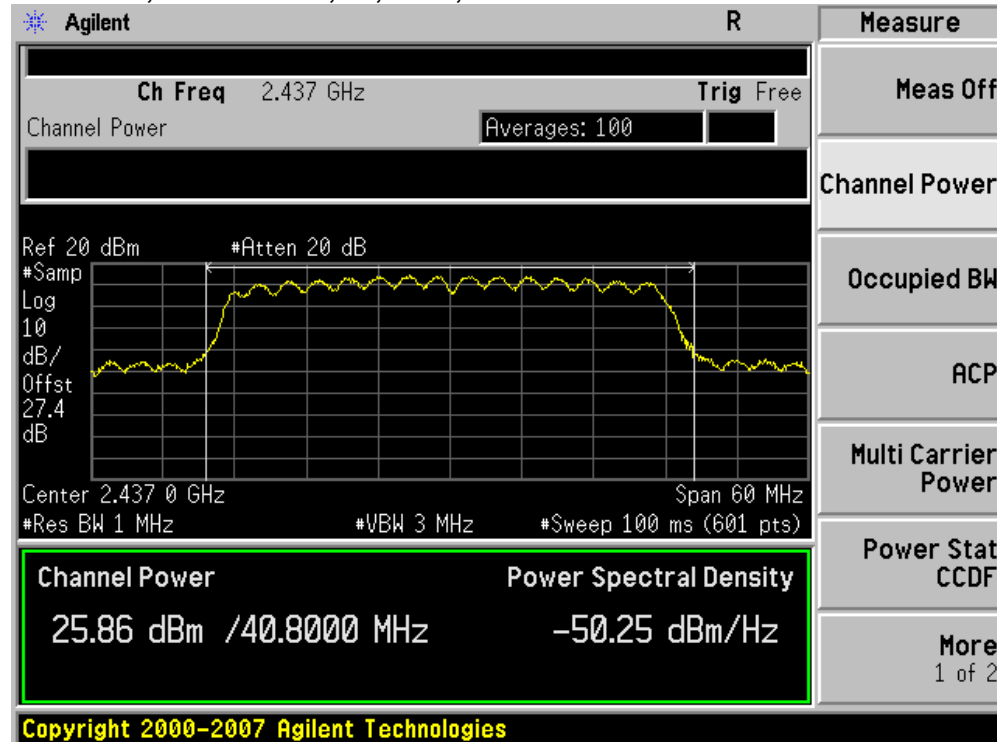





Peak Power, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

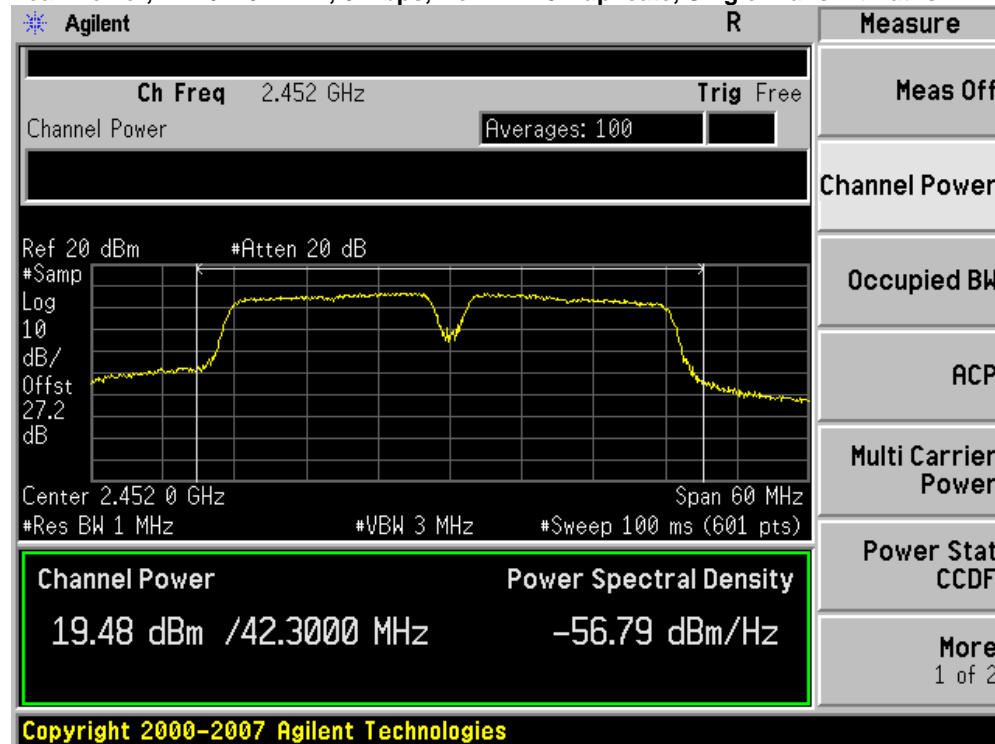


Peak Power, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

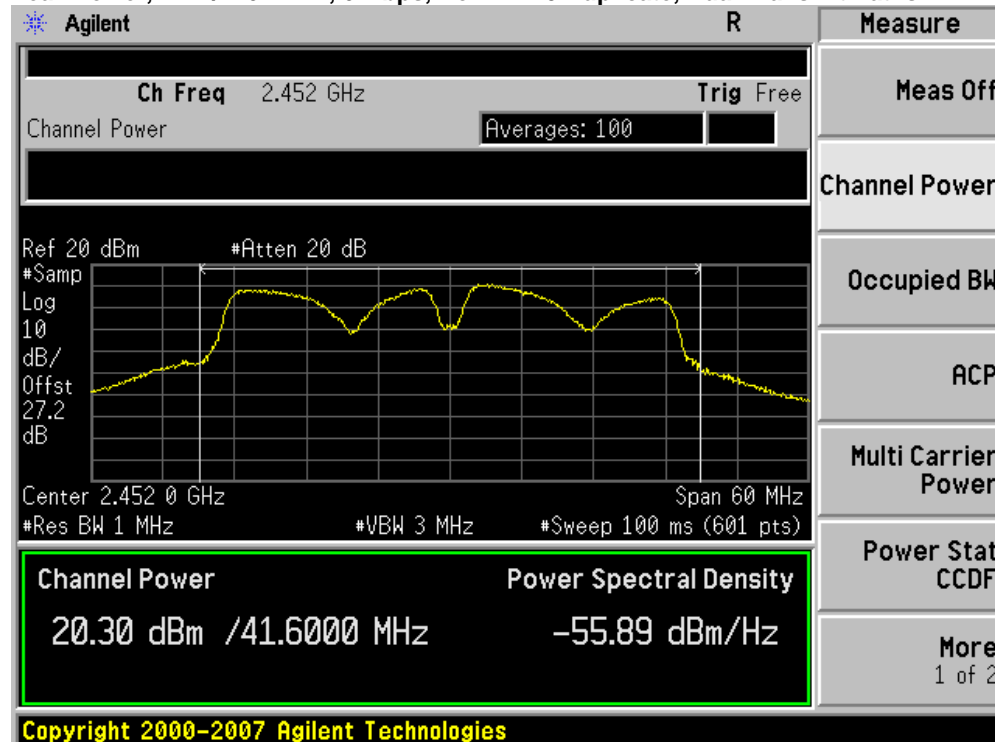

Peak Power, 2442/2462 MHz, M0, HT-40, Single Transmit Paths

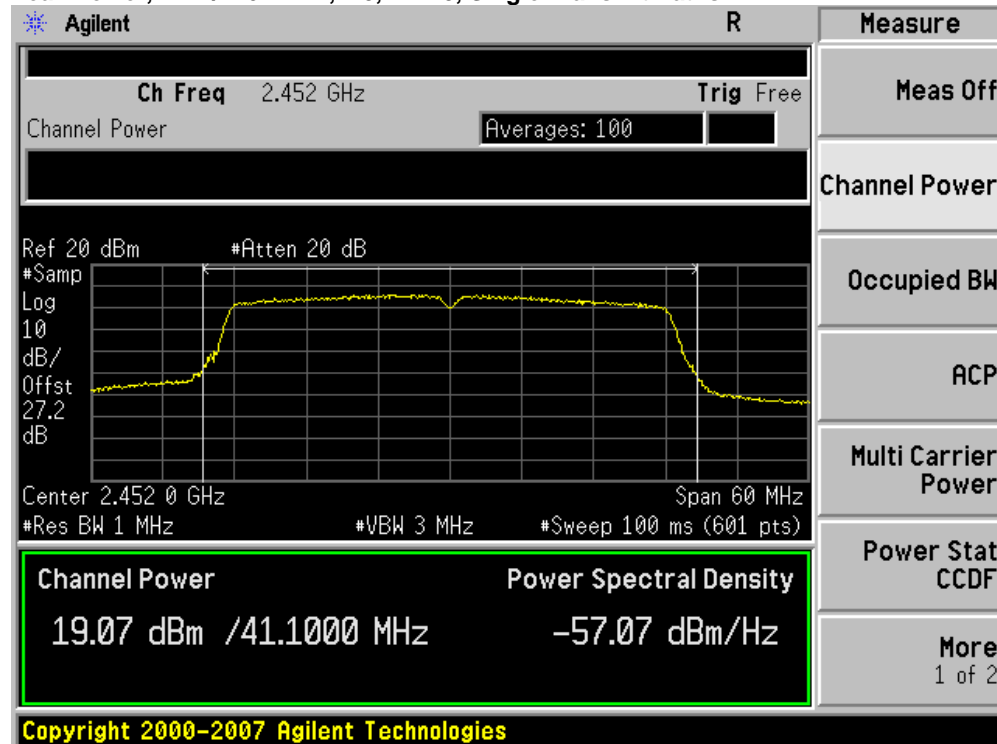

Peak Power, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

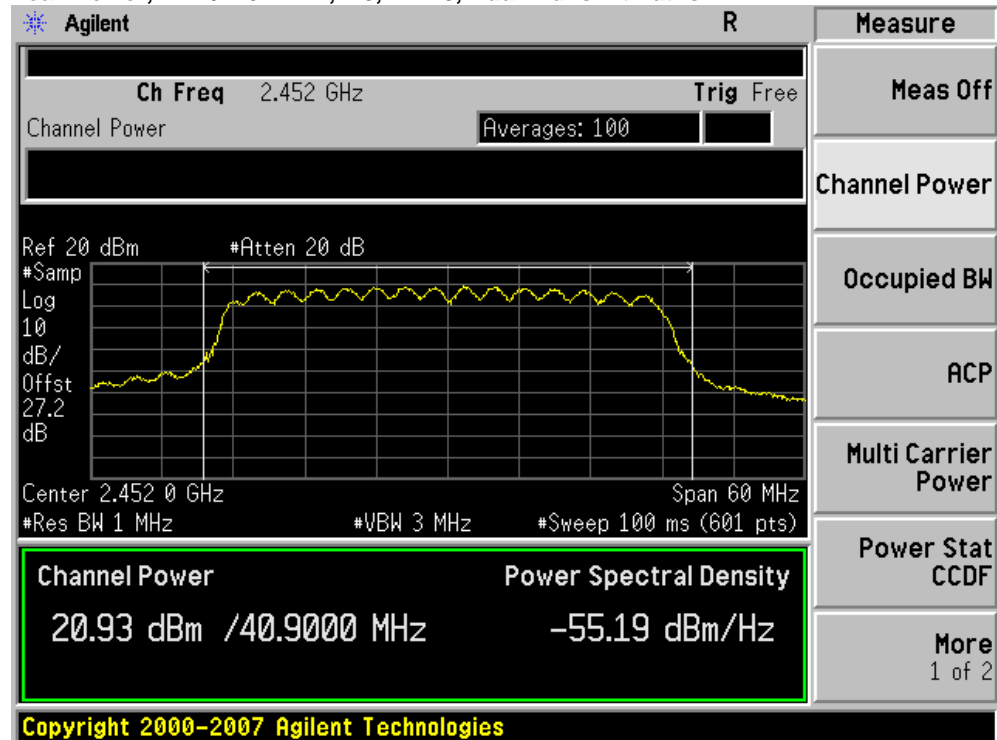

Power Spectral Density

15.247: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Center Frequency:	Frequency from table below
Span:	20 MHz
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	10s
Resolution Bandwidth:	3 kHz
Video Bandwidth:	10 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak Search


Record the Marker value.

Frequency (MHz)	Mode	Data Rate (Mbps)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	0.3	8	7.7
2412	Legacy CCK, Dual Tx Path	11	7.5	8	0.5
2412	Non HT-20, Single Tx Path	6	-3.5	8	11.5
2412	Non HT-20, Dual Tx Path	6	1.0	8	7.0
2412	Non HT-20 Beam Forming	6	0.0	8	8.0
2437	Legacy CCK, Dual Tx Path	11	6.3	8	1.7
2437	Non HT-20 Beam Forming	6	1.3	8	6.7
2462	Legacy CCK, Single Tx Path	11	0.0	8	8.0
2462	Legacy CCK, Dual Tx Path	11	16.7	8	-8.7
2462	Non HT-20, Single Tx Path	6	-3.8	8	11.8
2462	Non HT-20, Dual Tx Path	6	1.5	8	6.5
2462	Non HT-20 Beam Forming	6	-1.5	8	9.5
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	-9.9	8	17.9
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	-7.9	8	15.9
2412/2432	HT-40, Single Tx Path	m0	-9.1	8	17.1
2412/2432	HT-40, Dual Tx Path	m0	-5.9	8	13.9
2427/2447	Non HT-40 Duplicate	6	-3.0	8	11.0
2427/2447	HT-40	m0	-1.8	8	9.8
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	-8.5	8	16.5
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	-7.0	8	15.0
2442/2462	HT-40, Single Tx Path	m0	-9.5	8	17.5
2442/2462	HT-40, Dual Tx Path	m0	-6.0	8	14.0


Power Spectral Density, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

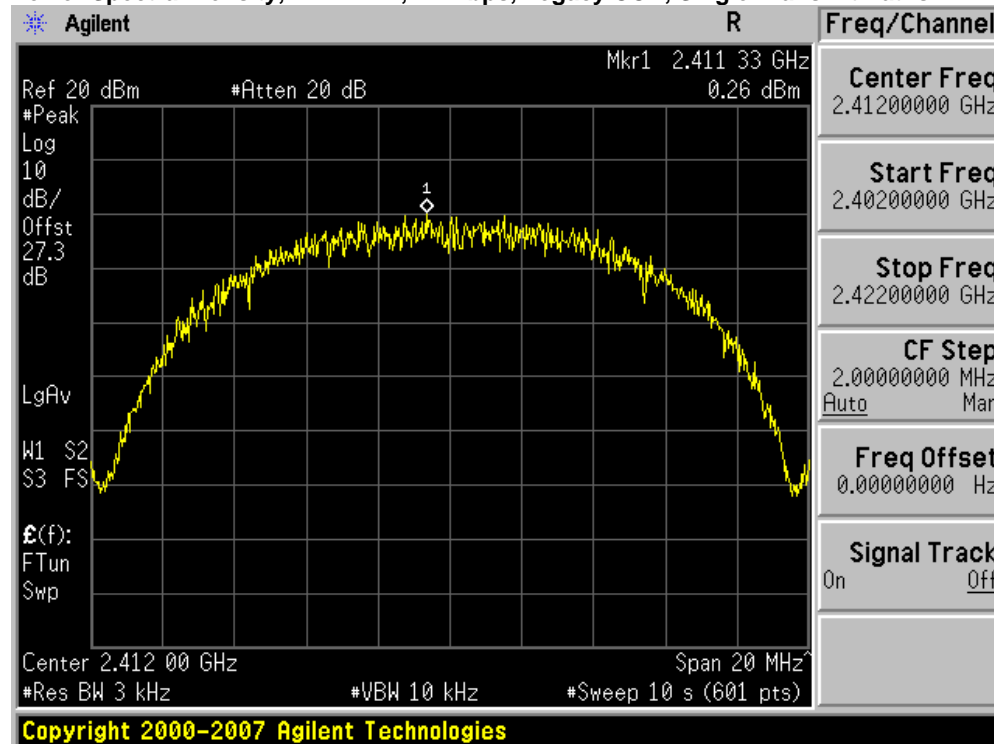


Power Spectral Density, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

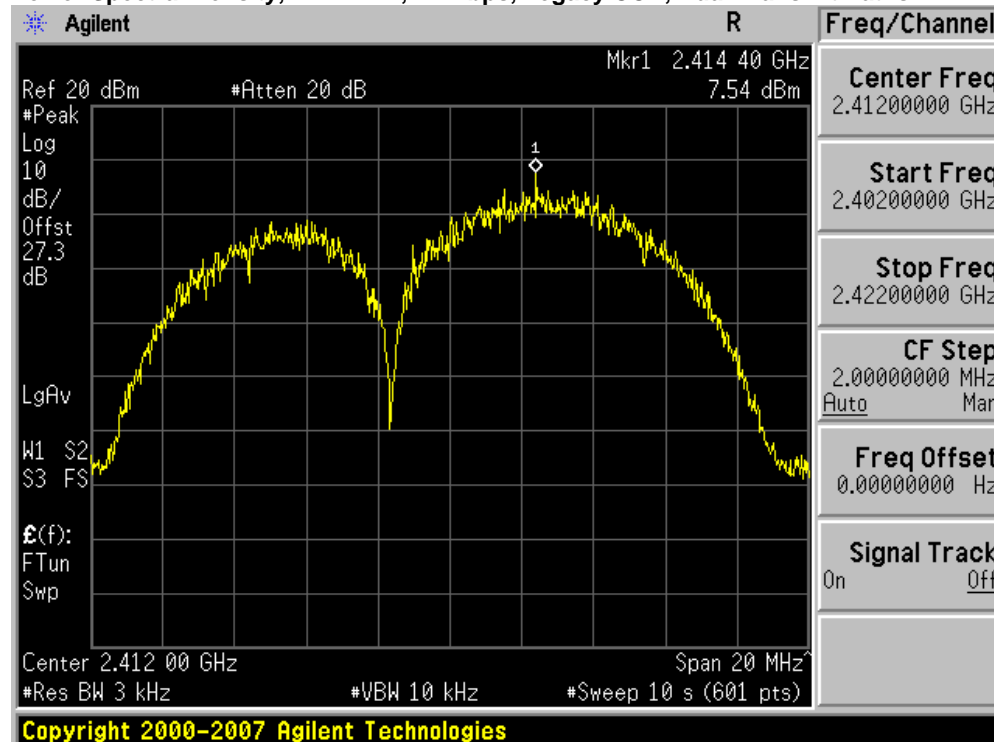


Power Spectral Density, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths


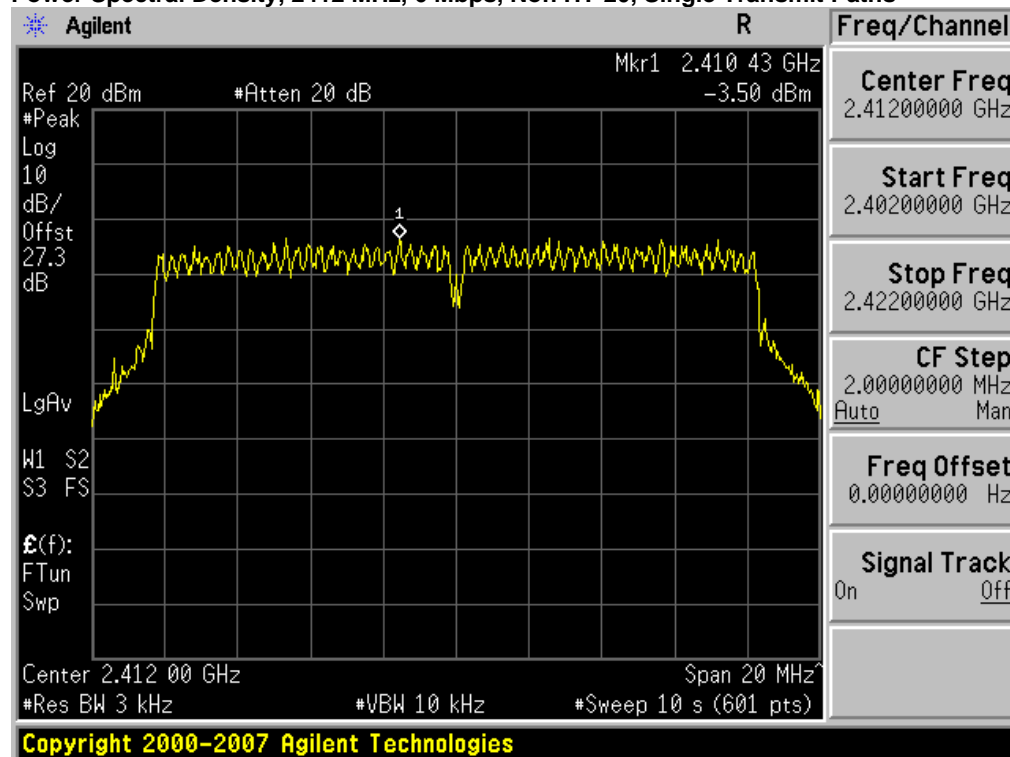


Power Spectral Density, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

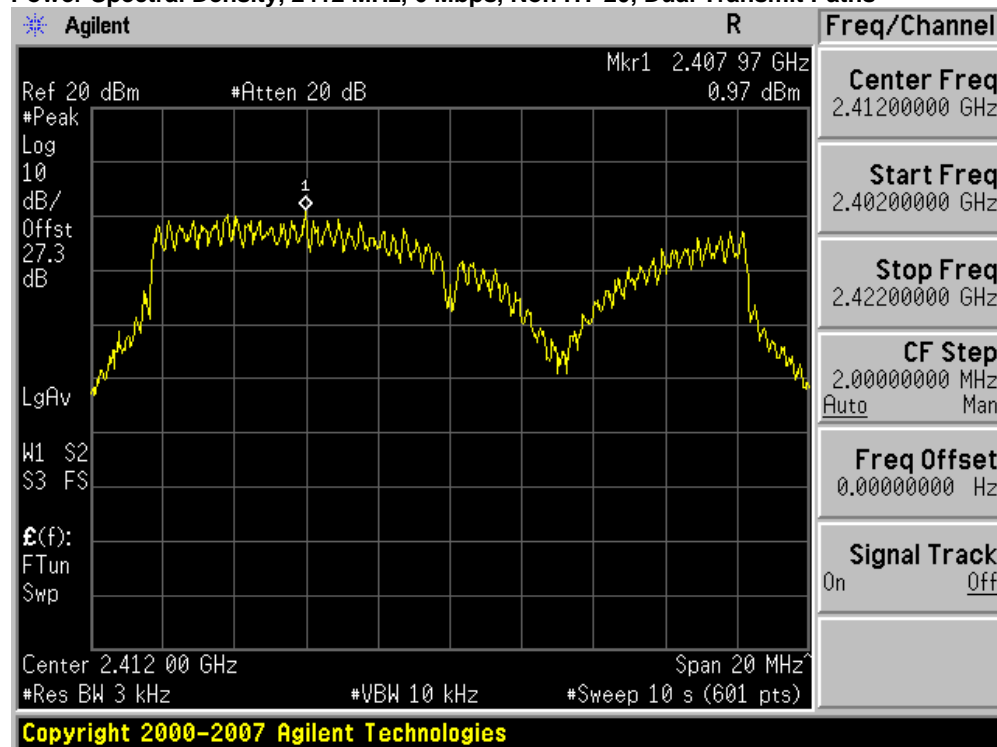


Power Spectral Density, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

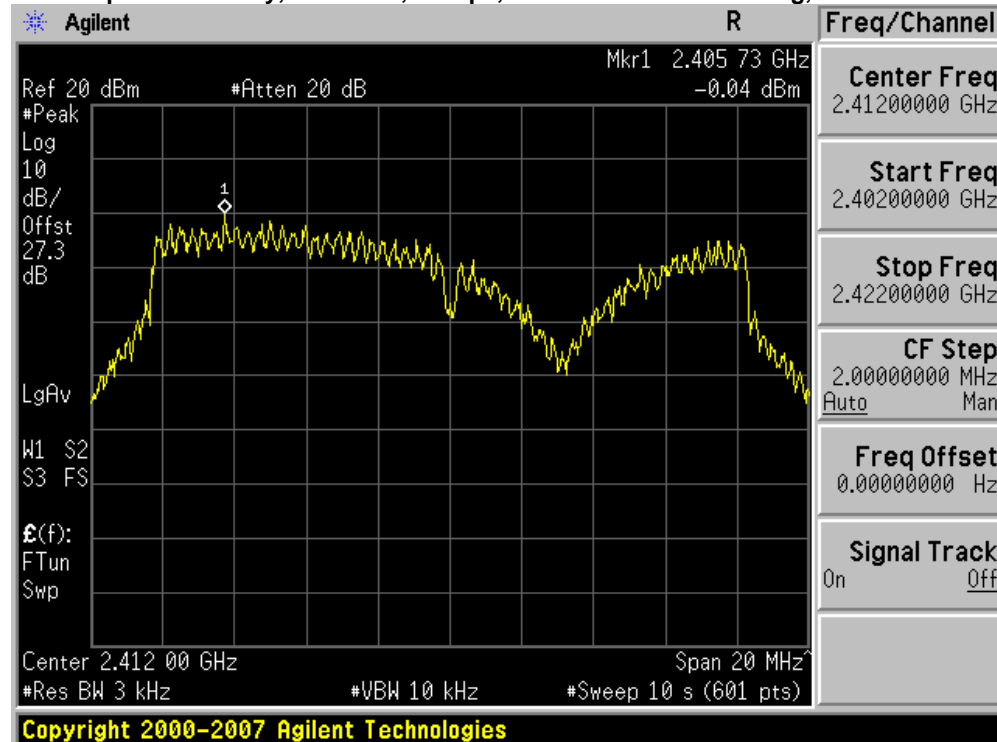


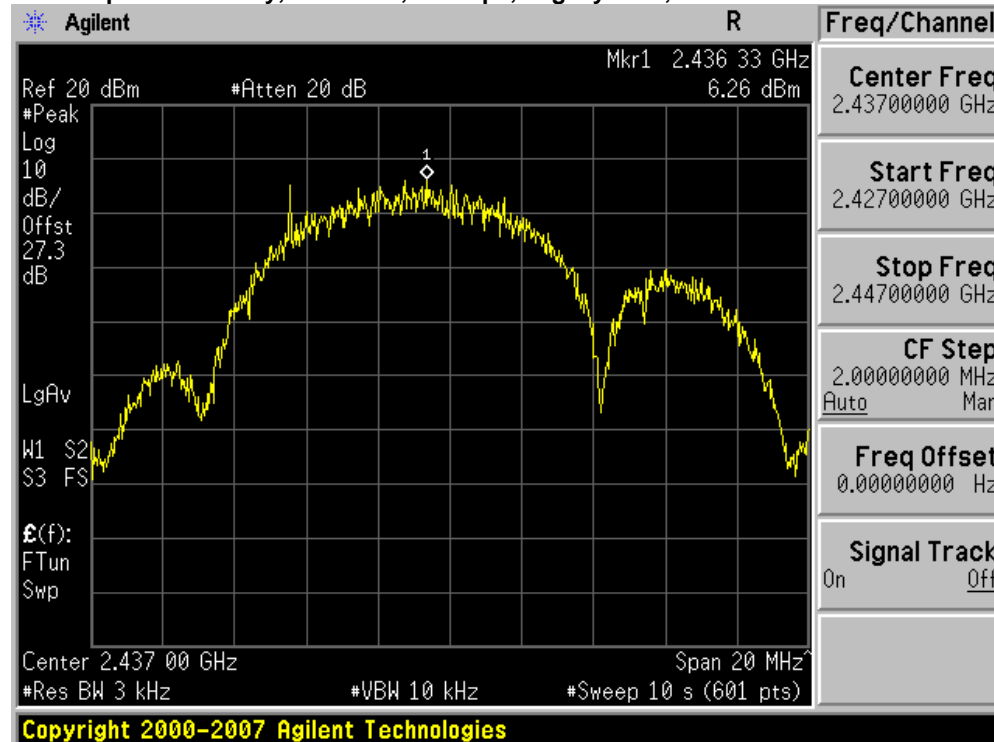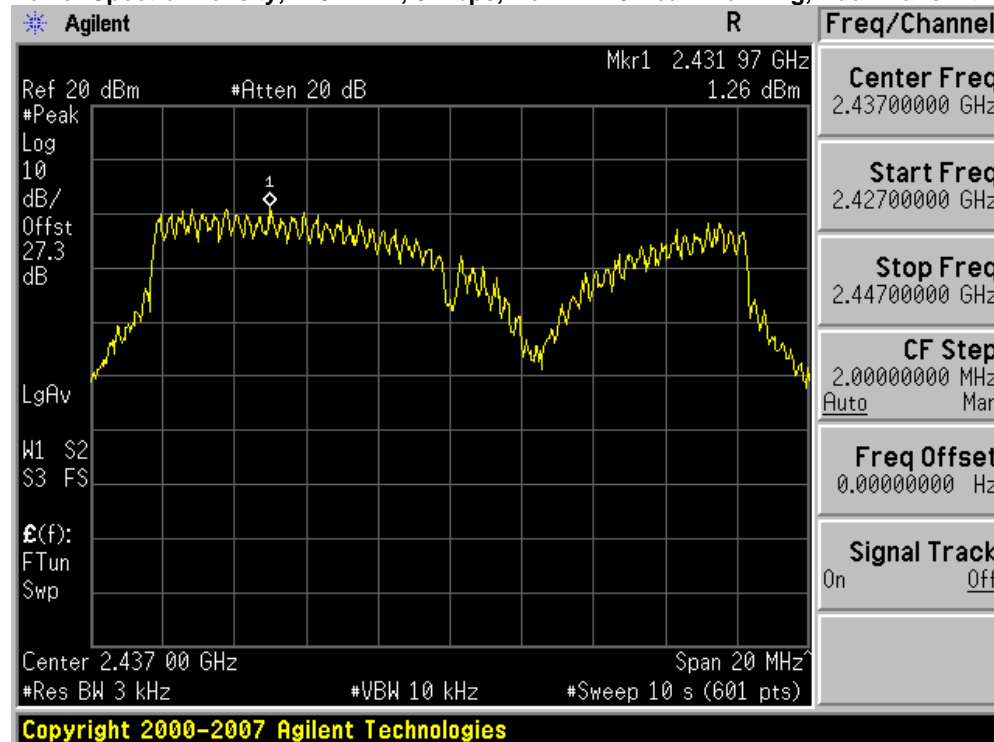Power Spectral Density, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**Power Spectral Density, 2437 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**


Power Spectral Density, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

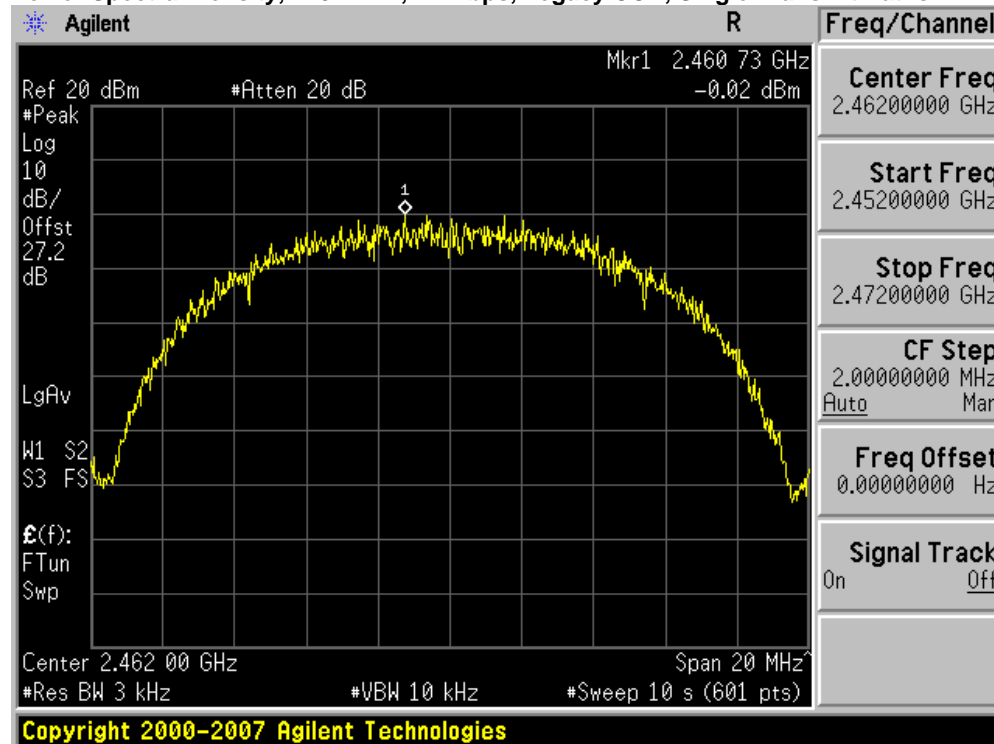


Power Spectral Density, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

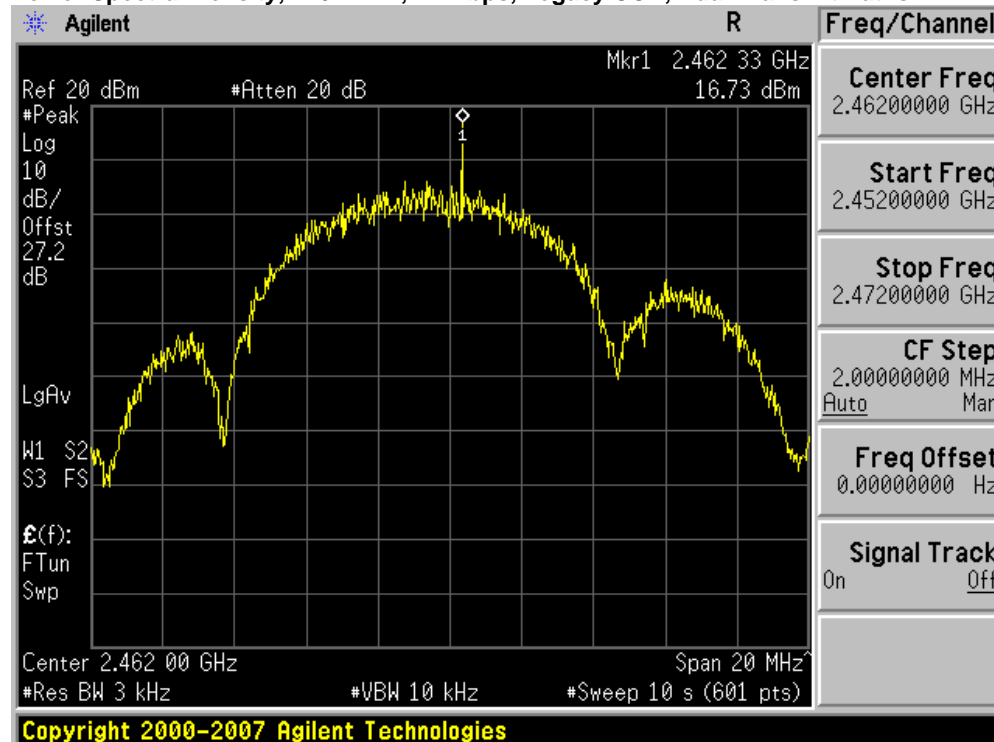


Power Spectral Density, 2462 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

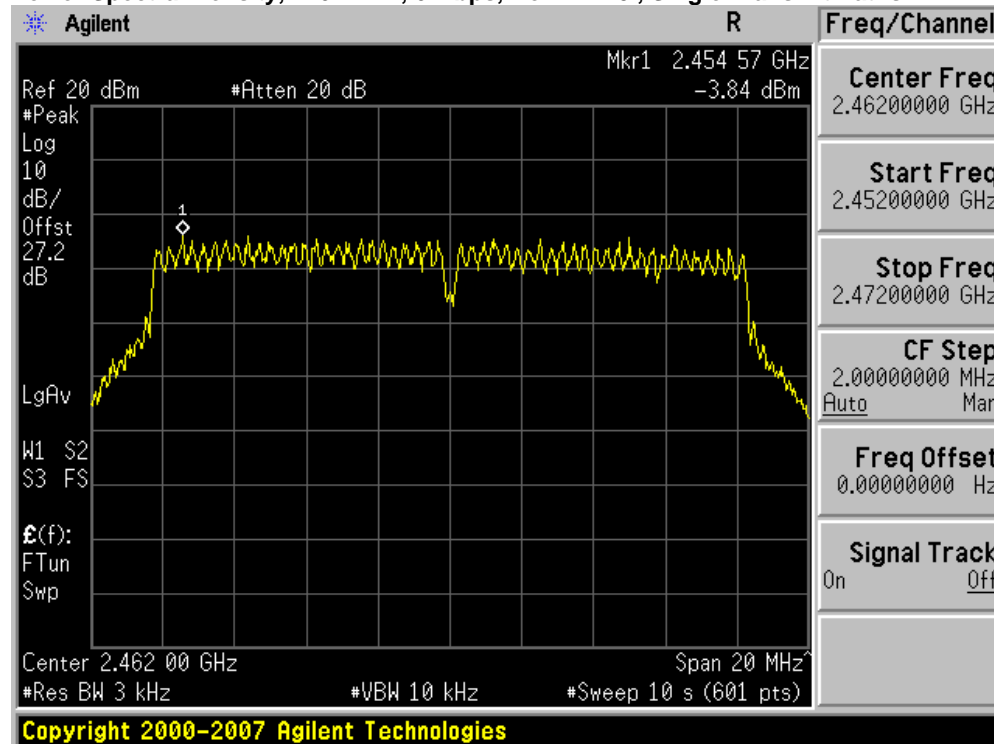


Power Spectral Density, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

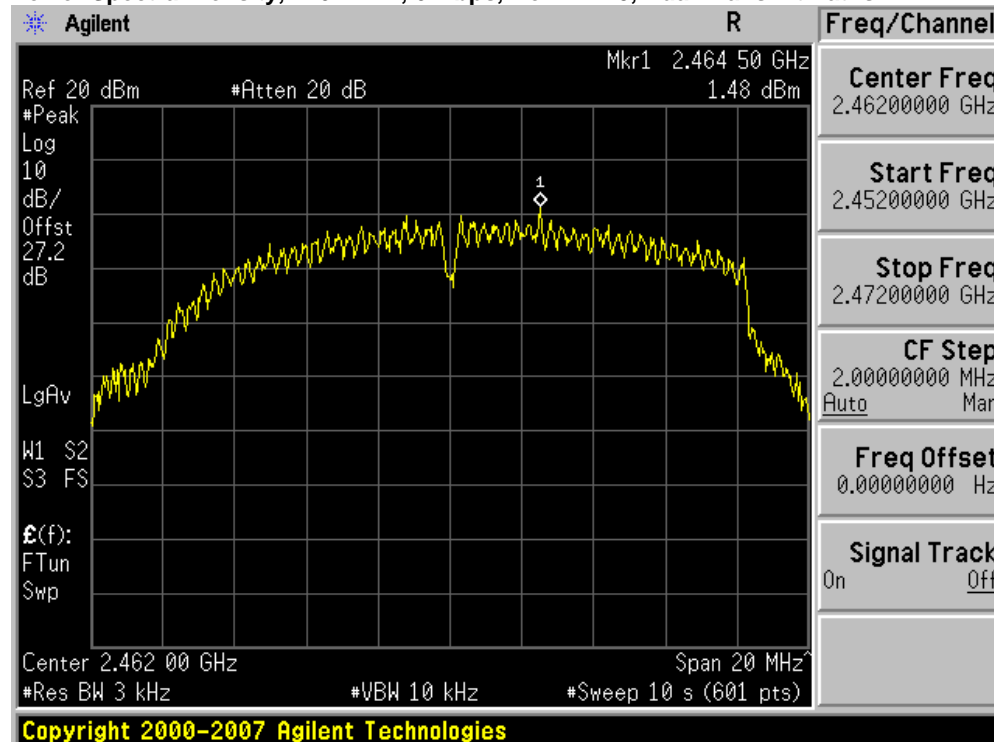


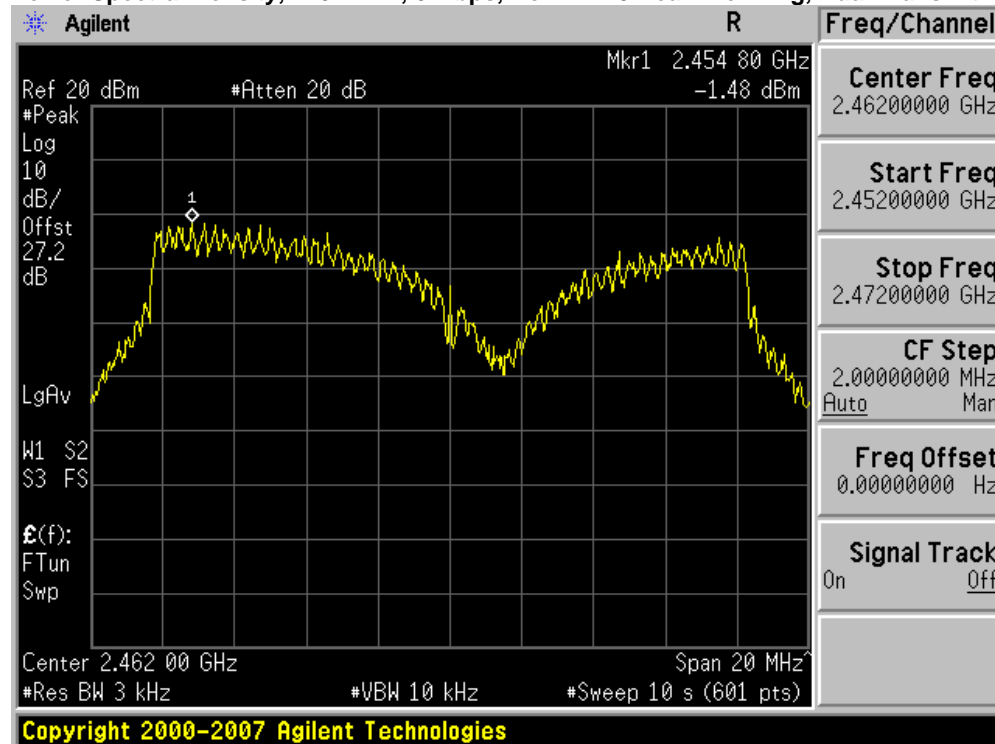**Power Spectral Density, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**


Power Spectral Density, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

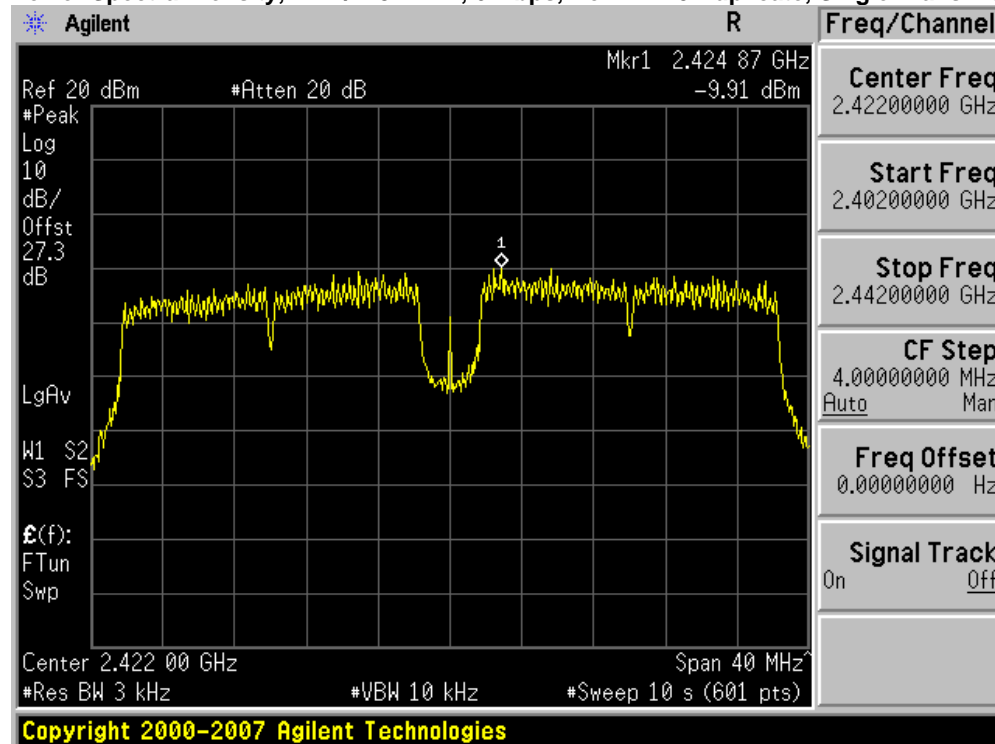


Power Spectral Density, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

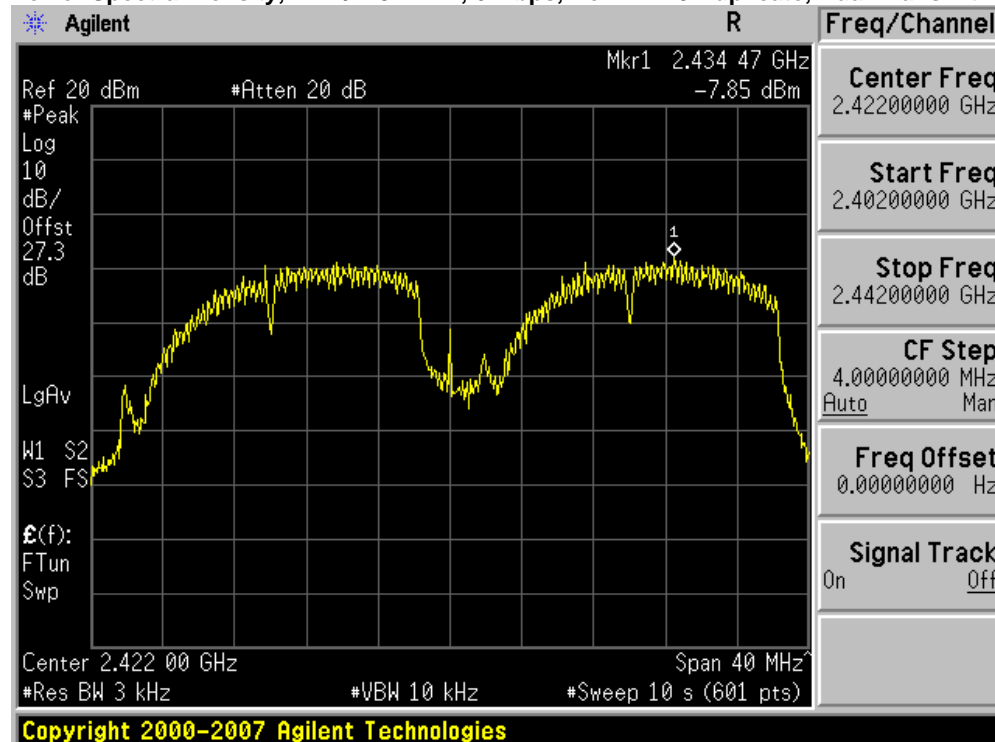


Power Spectral Density, 2412/2432 MHz, M0, HT-40, Single Transmit Paths

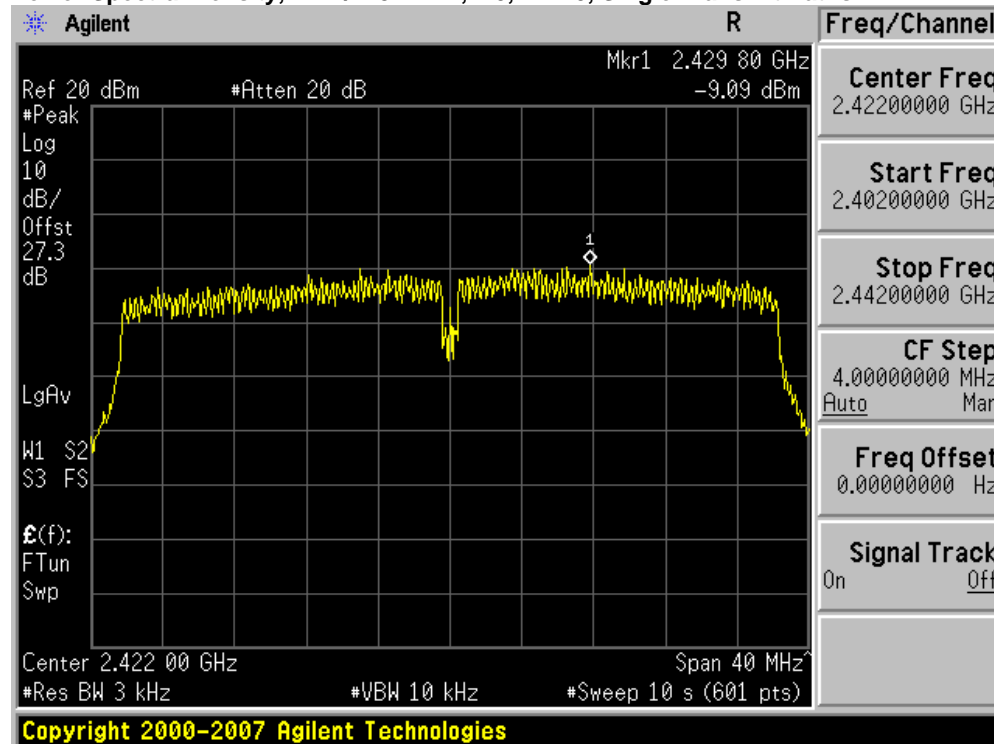


Power Spectral Density, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

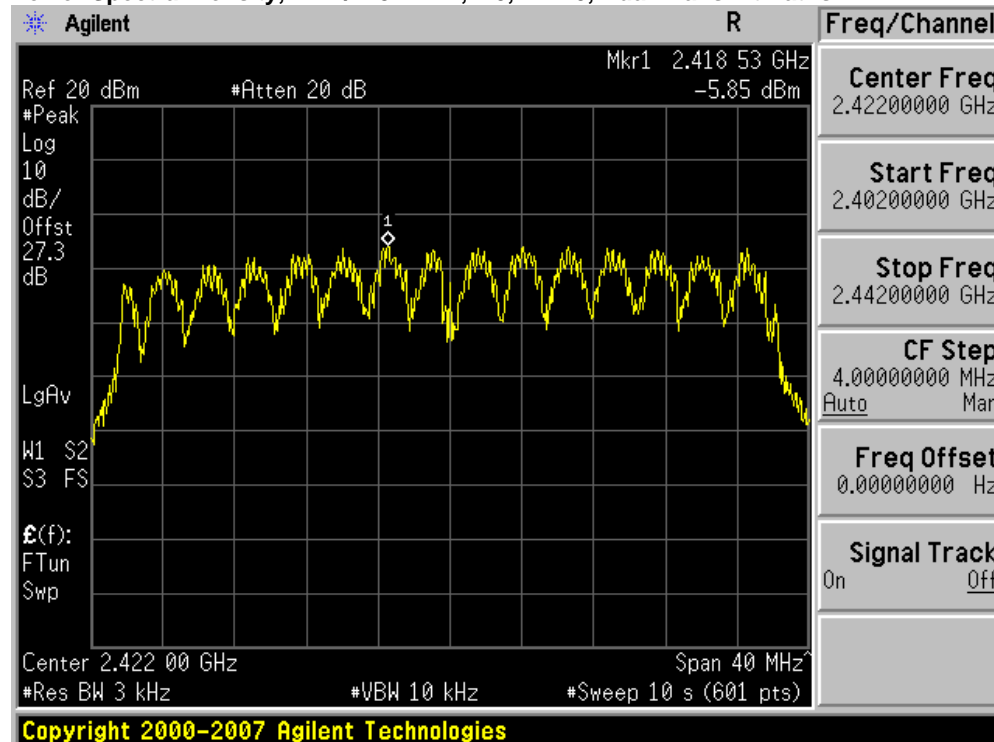


Power Spectral Density, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

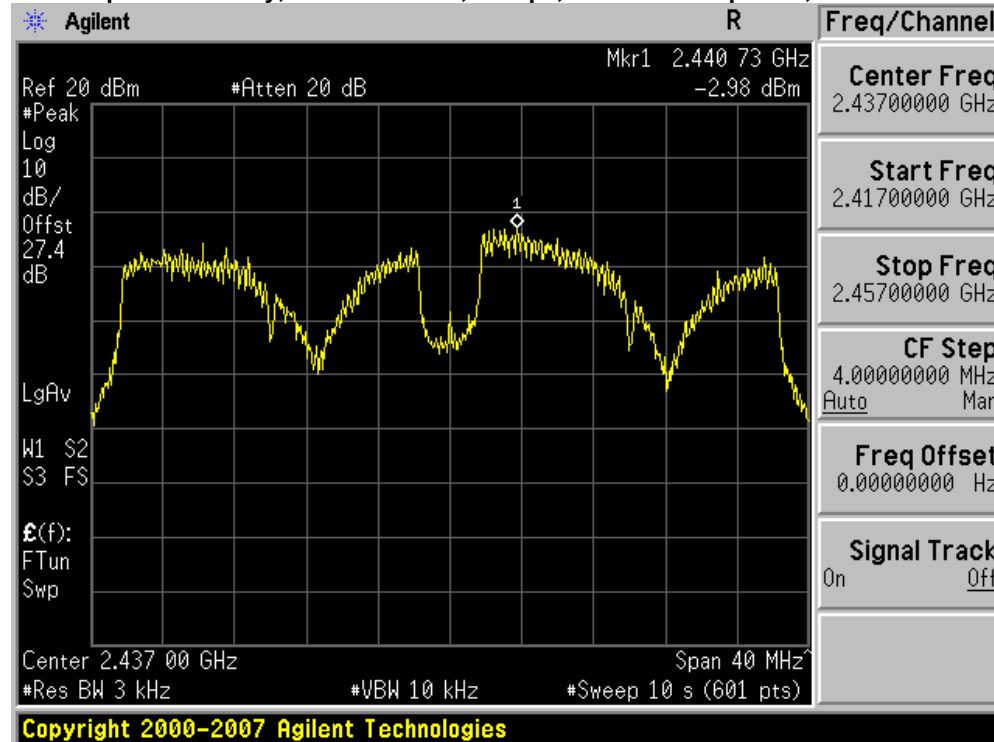


Power Spectral Density, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

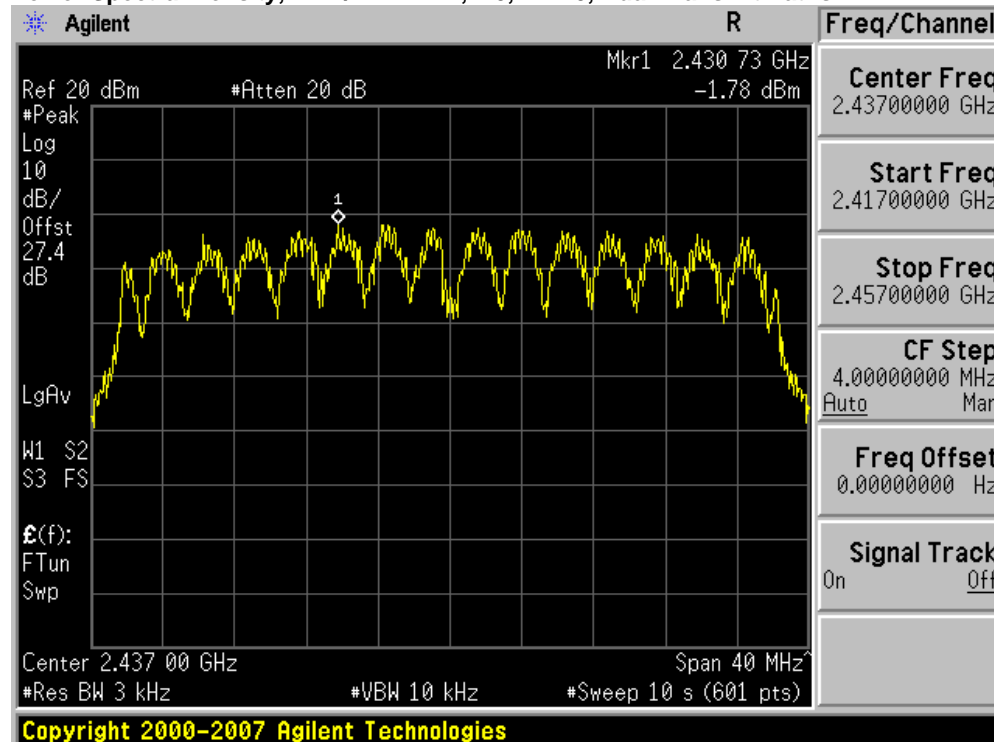


Power Spectral Density, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

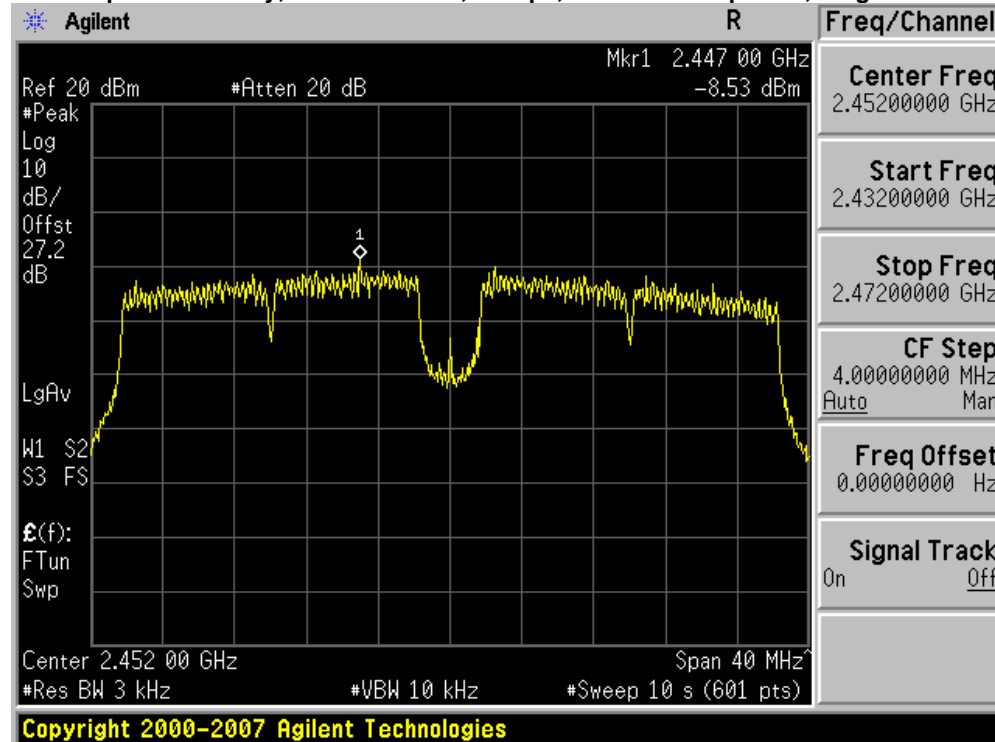


Power Spectral Density, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

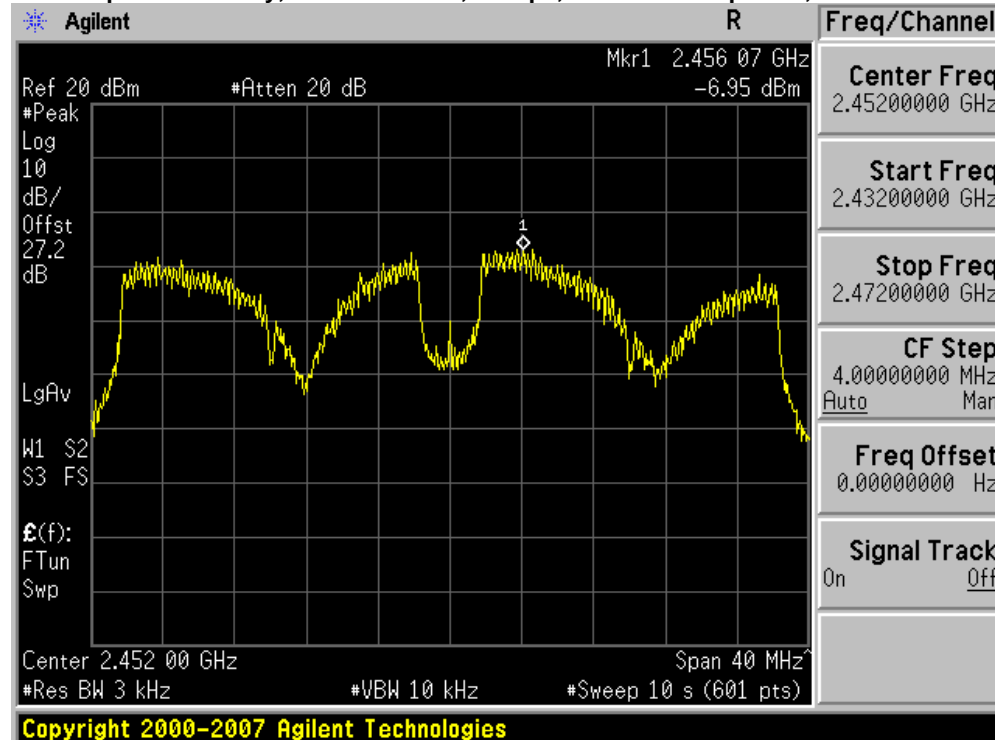

Power Spectral Density, 2442/2462 MHz, M0, HT-40, Single Transmit Paths

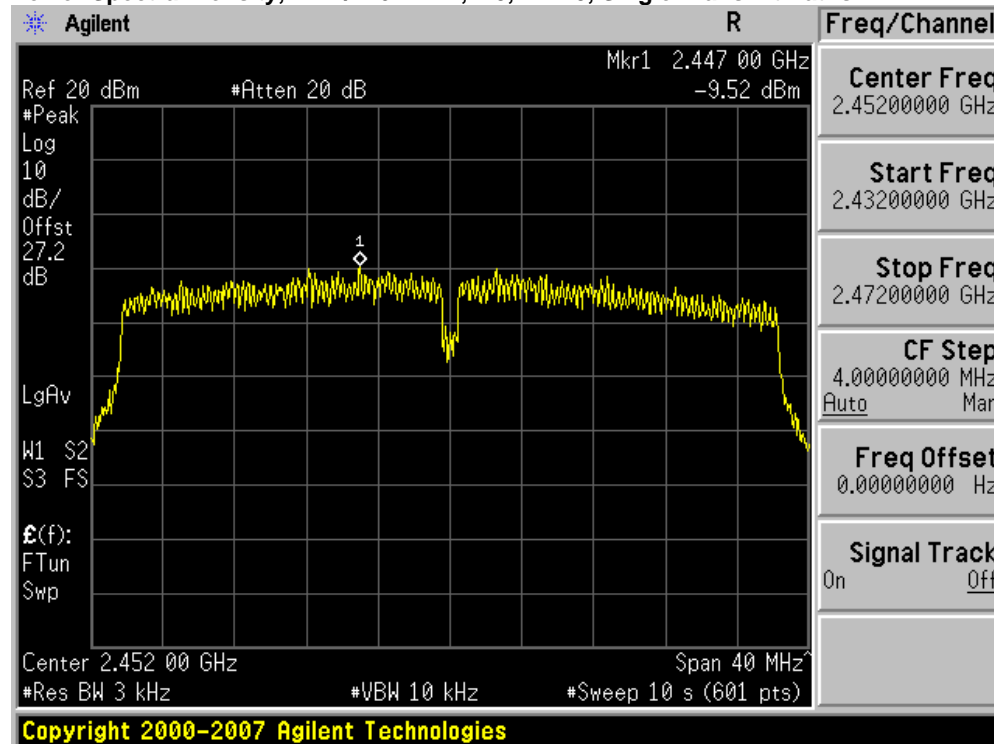

Power Spectral Density, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

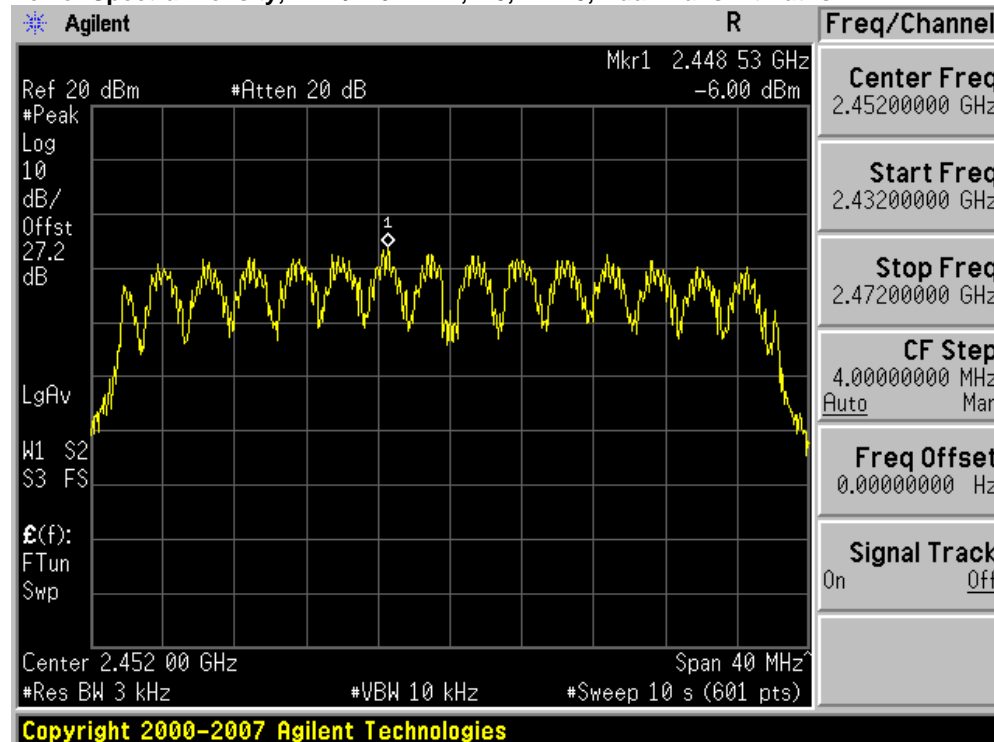



Conducted Spurious Emissions

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak


Record the marker waveform peak to spur difference

Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Spur Delta (dB)	Limit (dBc)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	49.4	30	19.4
2412	Legacy CCK, Dual Tx Path	11	45.5	30	15.5
2412	Non HT-20, Single Tx Path	6	47.9	30	17.9
2412	Non HT-20, Dual Tx Path	6	47.8	30	17.8
2412	Non HT-20 Beam Forming	6	47.0	30	17.0
2437	Legacy CCK, Dual Tx Path	11	46.7	30	16.7
2437	Non HT-20 Beam Forming	6	45.3	30	15.3
2462	Legacy CCK, Single Tx Path	11	47.2	30	17.2
2462	Legacy CCK, Dual Tx Path	11	41.6	30	11.6
2462	Non HT-20, Single Tx Path	6	48.3	30	18.3
2462	Non HT-20, Dual Tx Path	6	45.8	30	15.8
2462	Non HT-20 Beam Forming	6	49.1	30	19.1
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	50.9	30	20.9
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	50.4	30	20.4
2412/2432	HT-40, Single Tx Path	m0	51.4	30	21.4
2412/2432	HT-40, Dual Tx Path	m0	51.4	30	21.4
2427/2447	Non HT-40 Duplicate	6	49.4	30	19.4
2427/2447	HT-40	m0	48.4	30	18.4
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	50.2	30	20.2
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	50.7	30	20.7
2442/2462	HT-40, Single Tx Path	m0	50.5	30	20.5
2442/2462	HT-40, Dual Tx Path	m0	50.2	30	20.2


Conducted Spurs, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

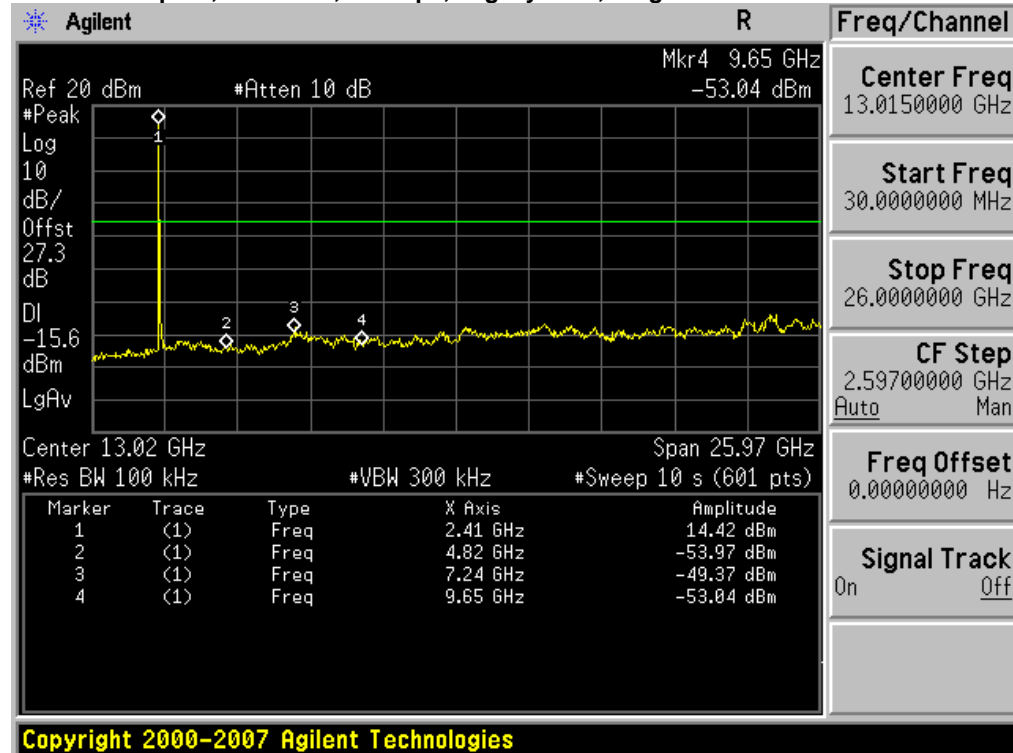


Conducted Spurs, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

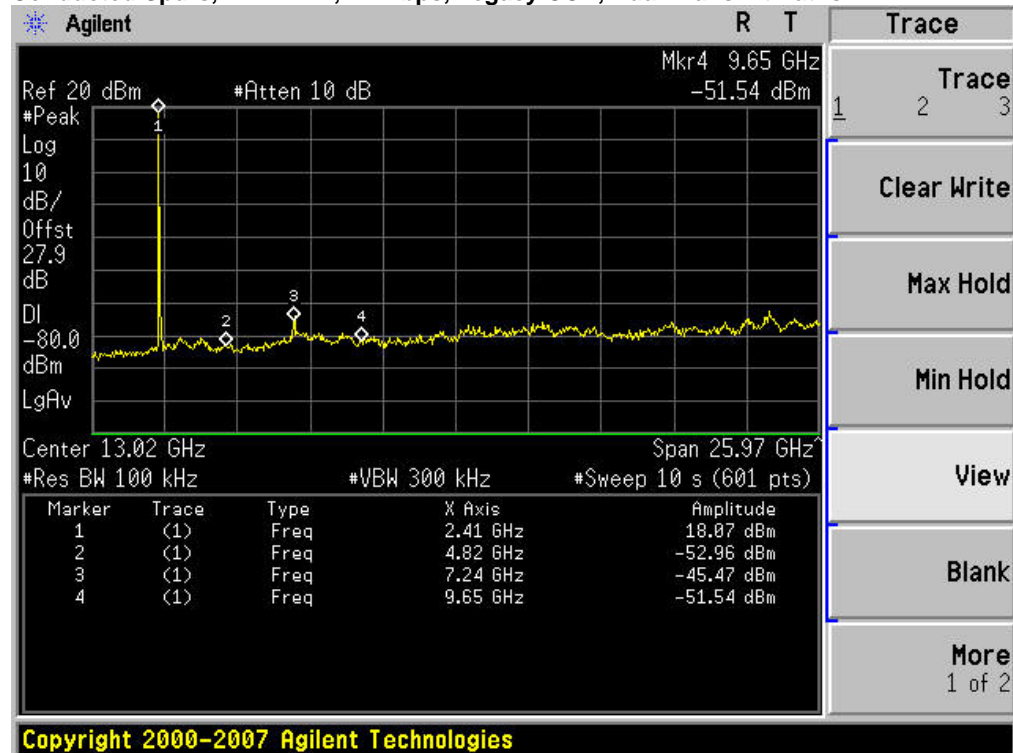


Conducted Spurs, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths


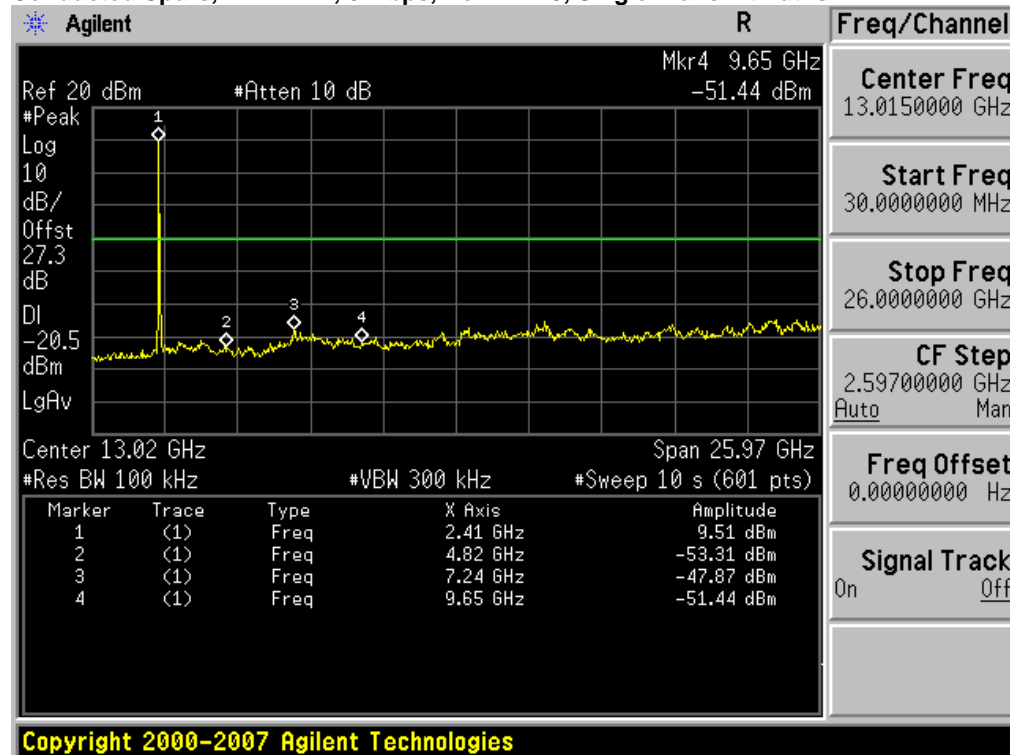


Conducted Spurs, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

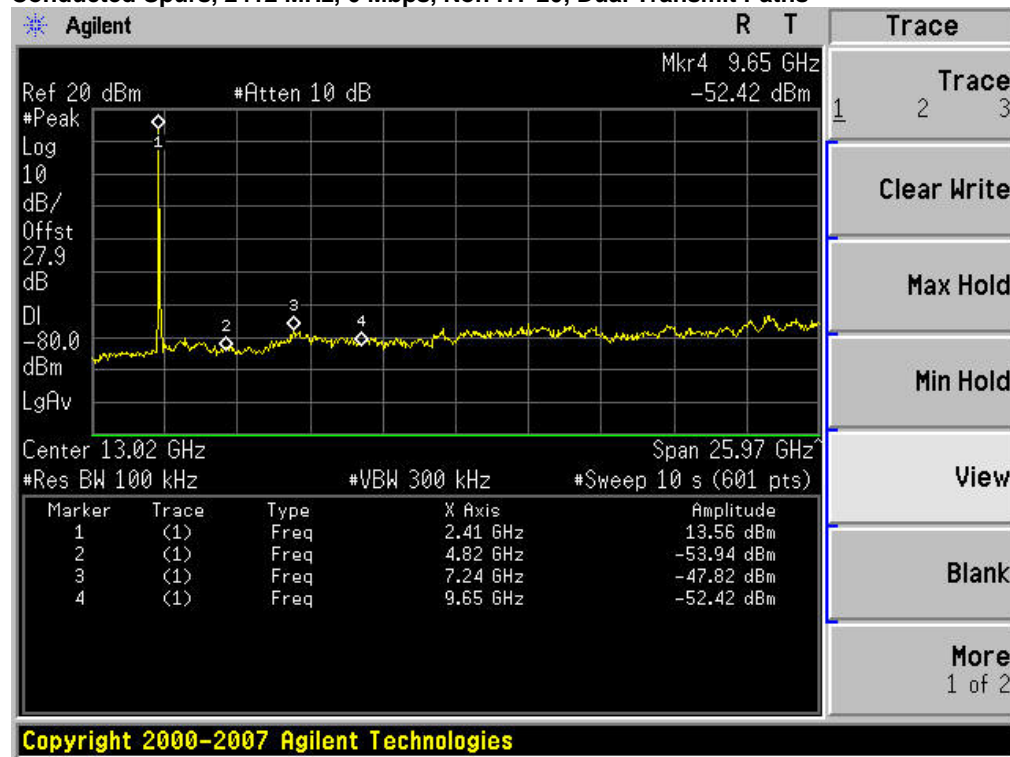


Conducted Spurs, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths

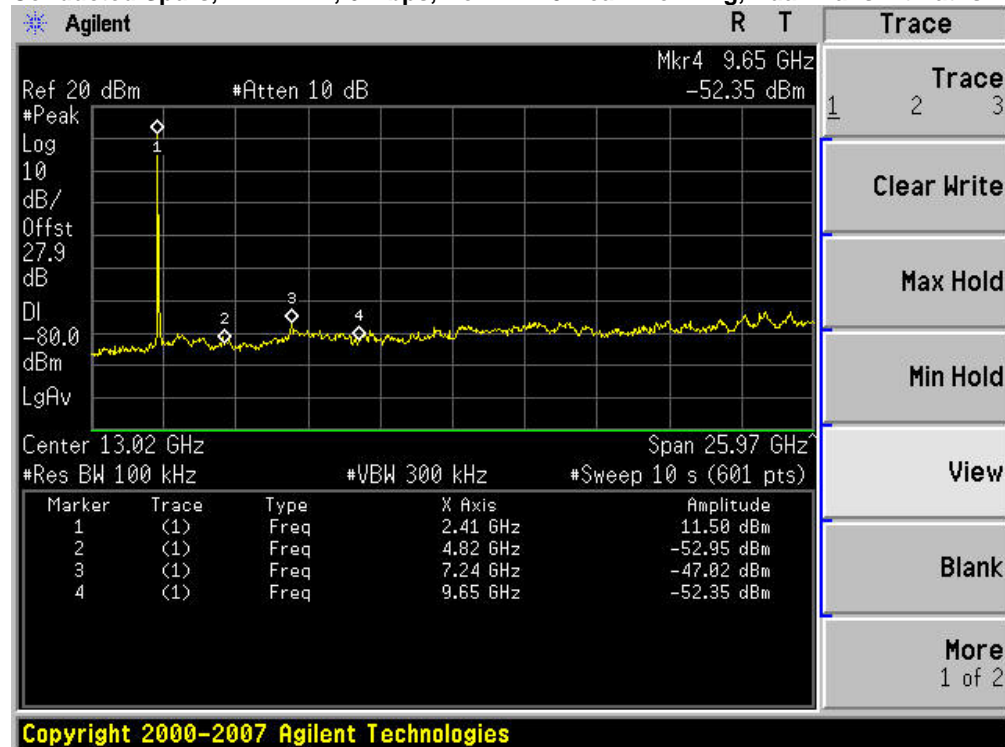


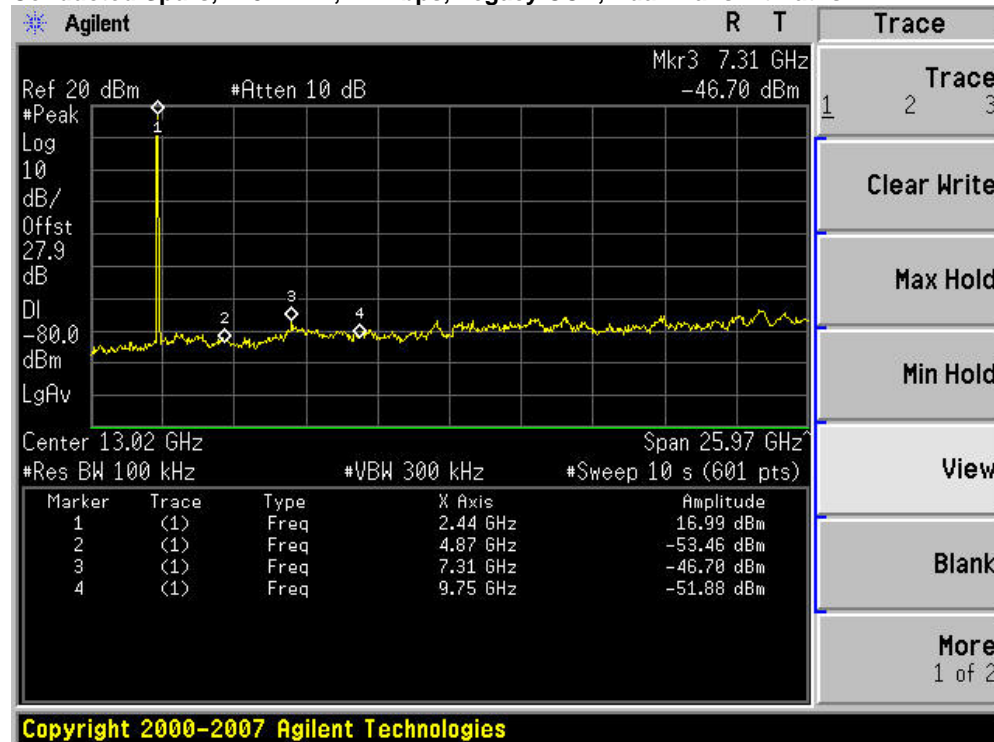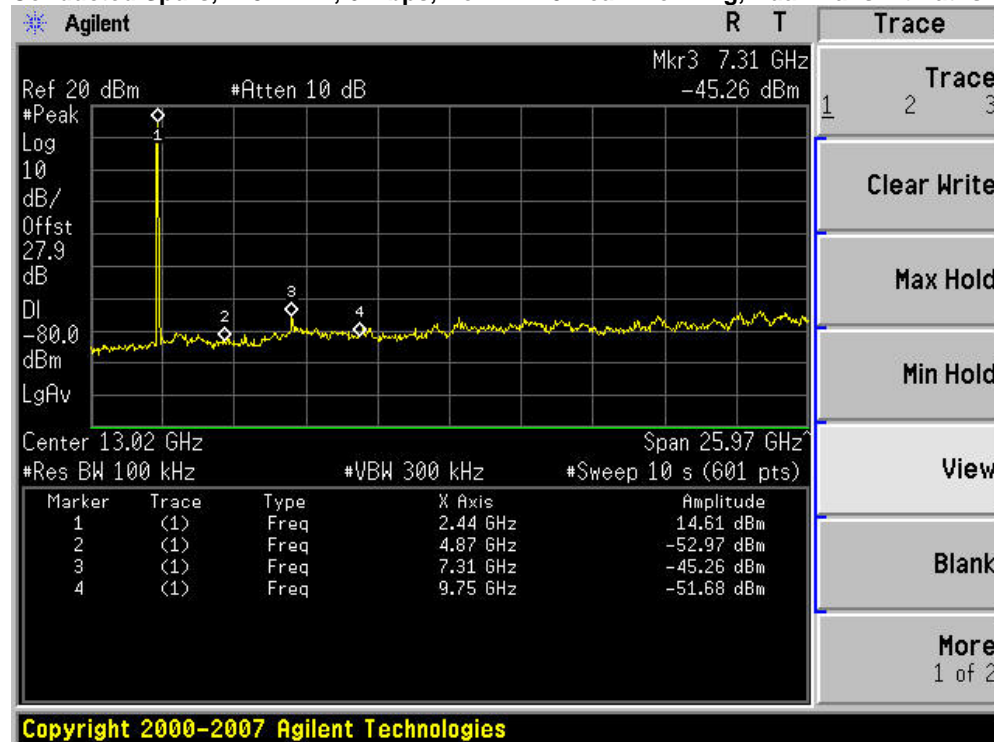Conducted Spurs, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths**Conducted Spurs, 2437 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths**


Conducted Spurs, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths

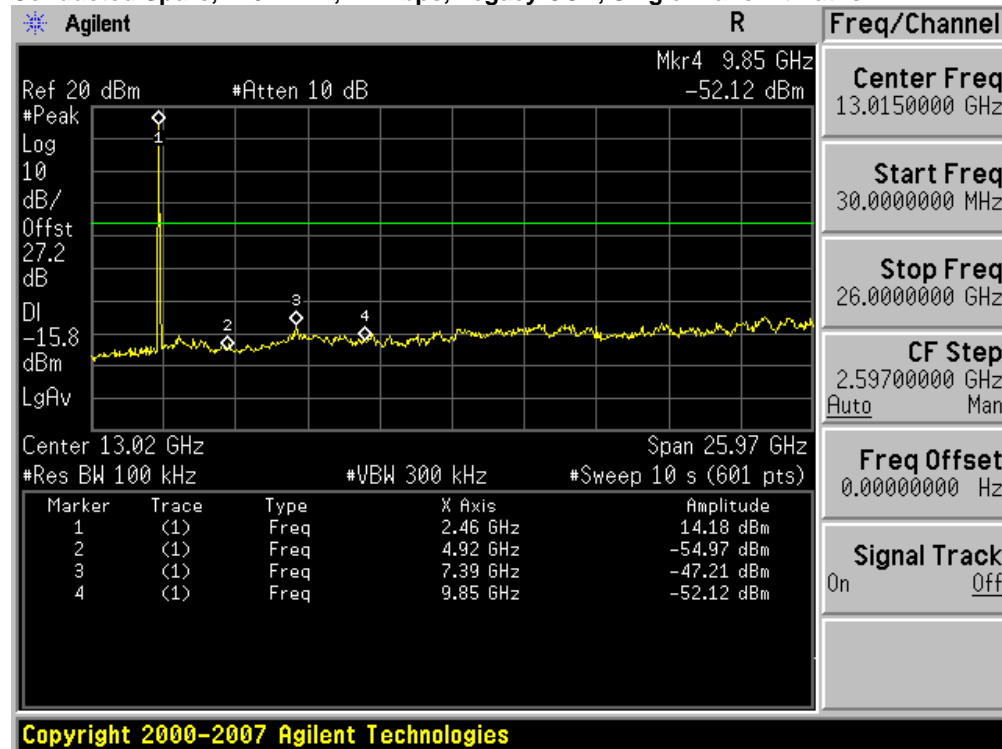


Conducted Spurs, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths

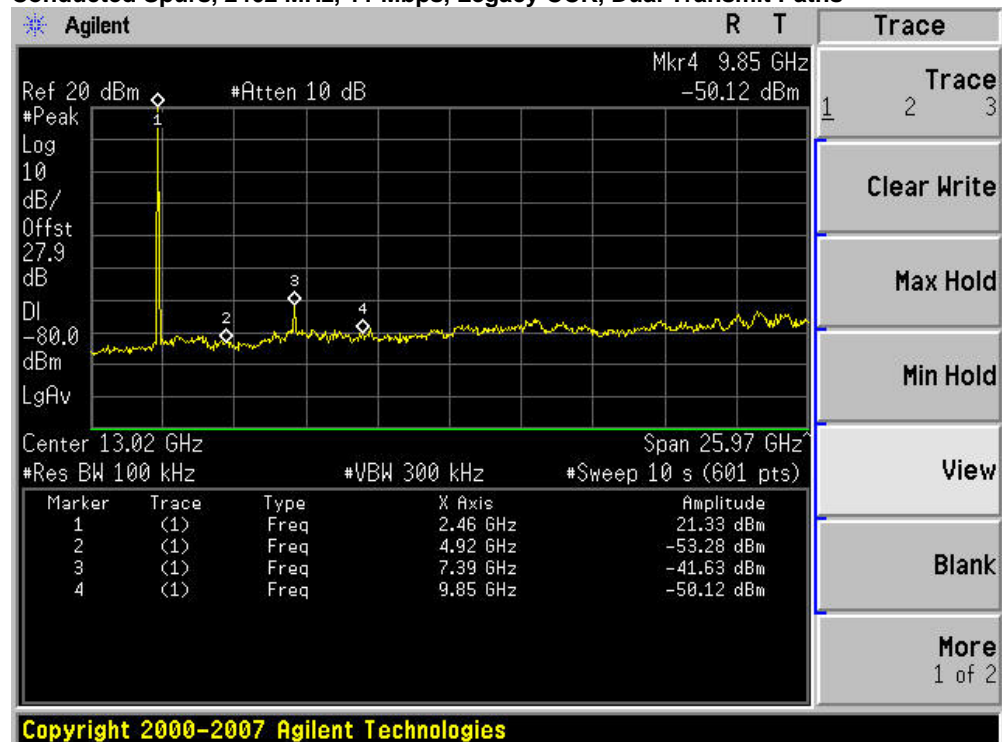


Conducted Spurs, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

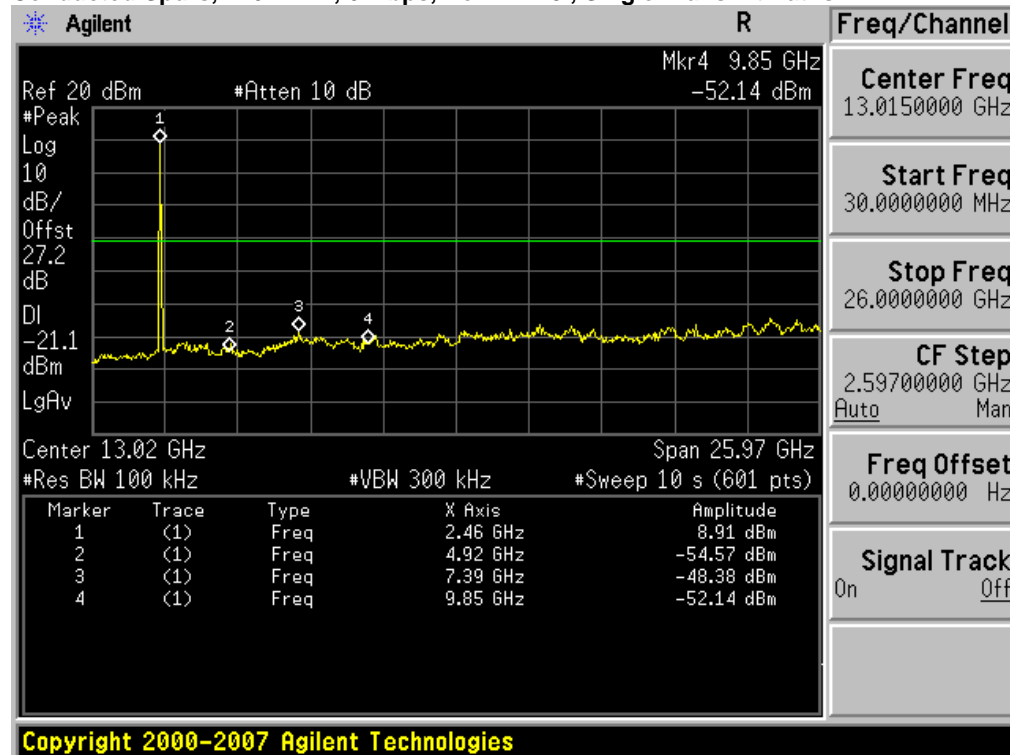


Conducted Spurs, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths

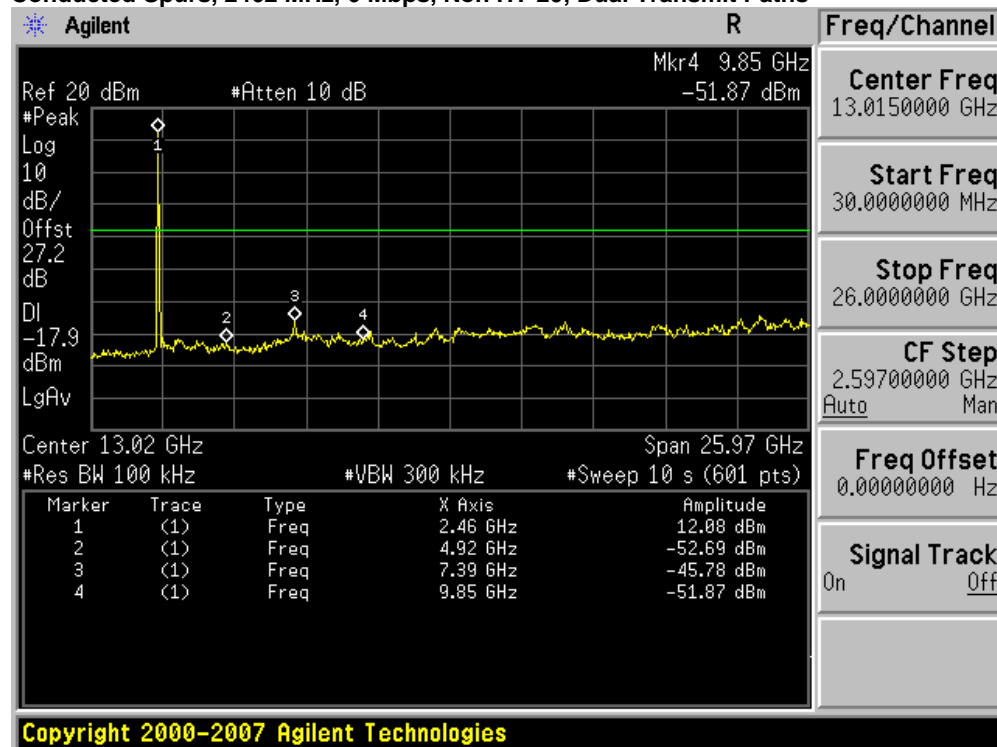


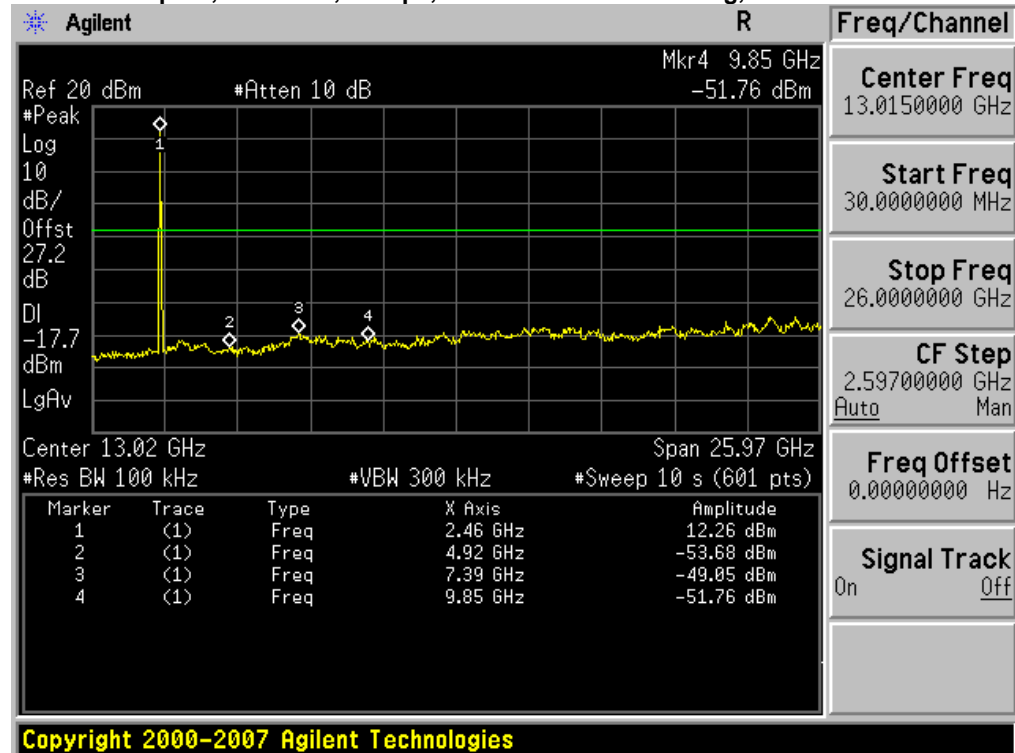Conducted Spurs, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths


Conducted Spurs, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

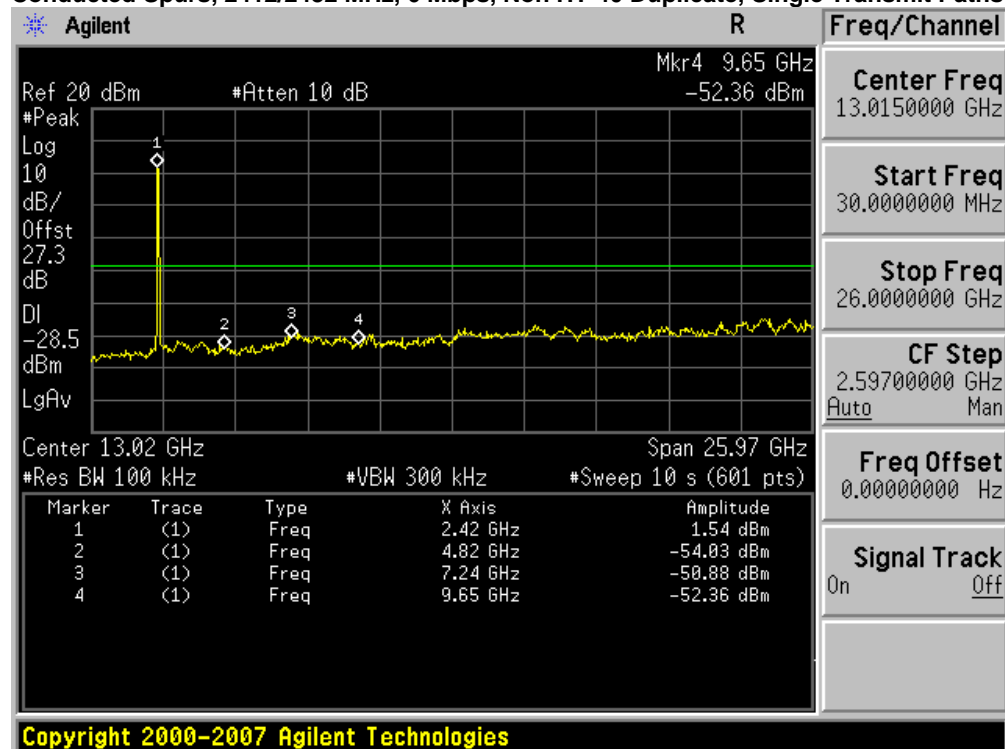


Conducted Spurs, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

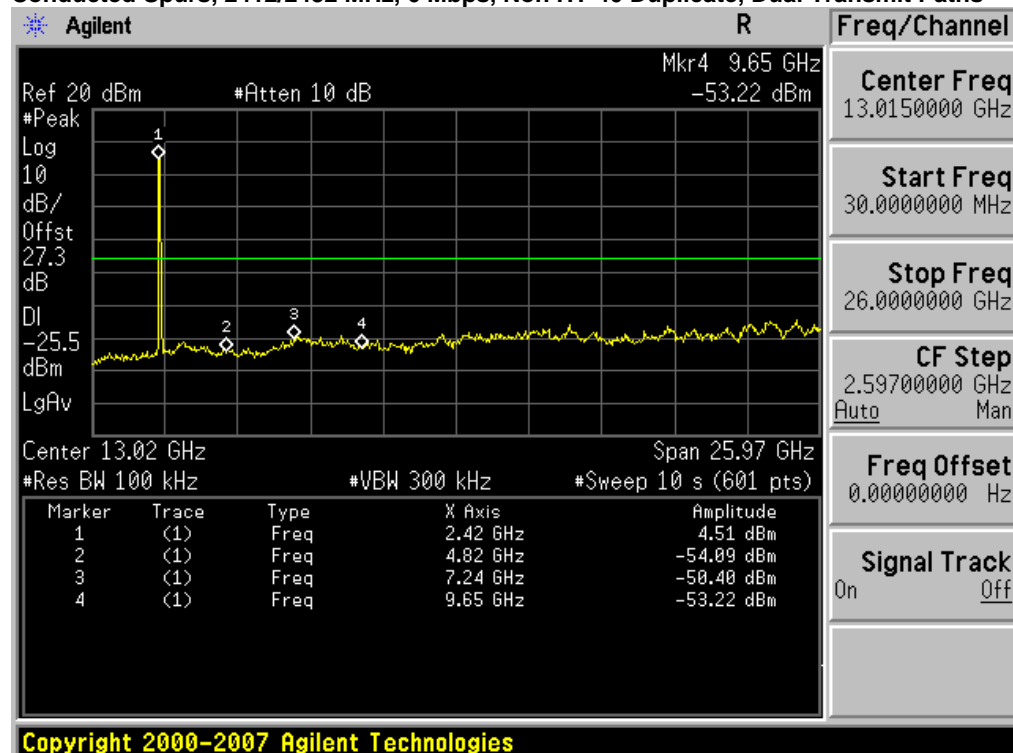


Conducted Spurs, 2412/2432 MHz, M0, HT-40, Single Transmit Paths

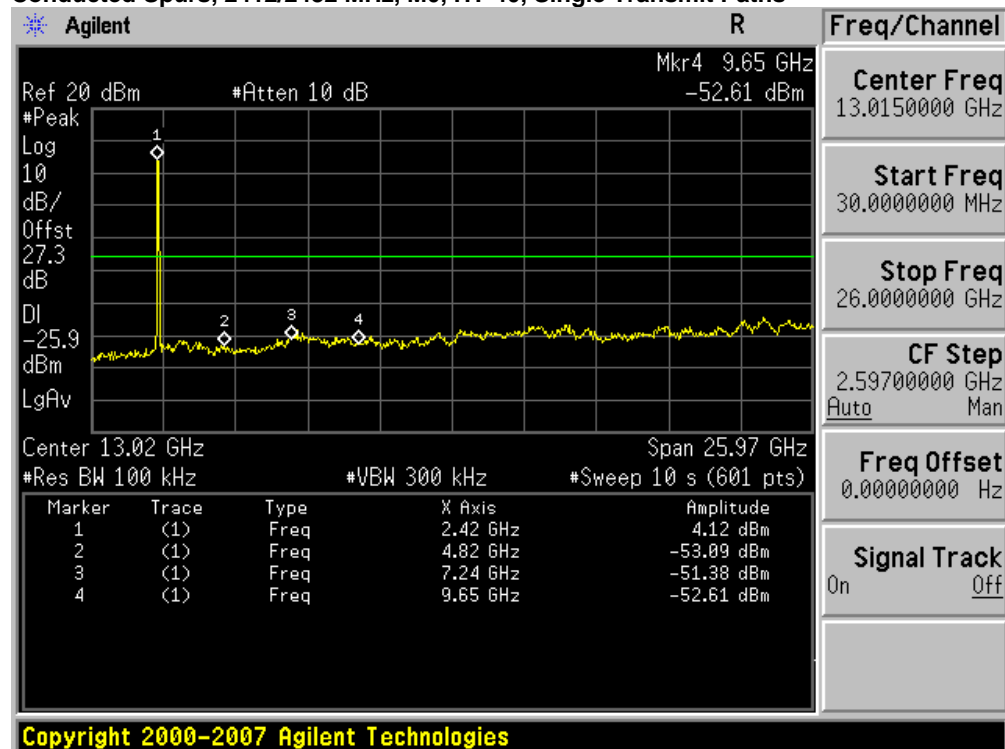


Conducted Spurs, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

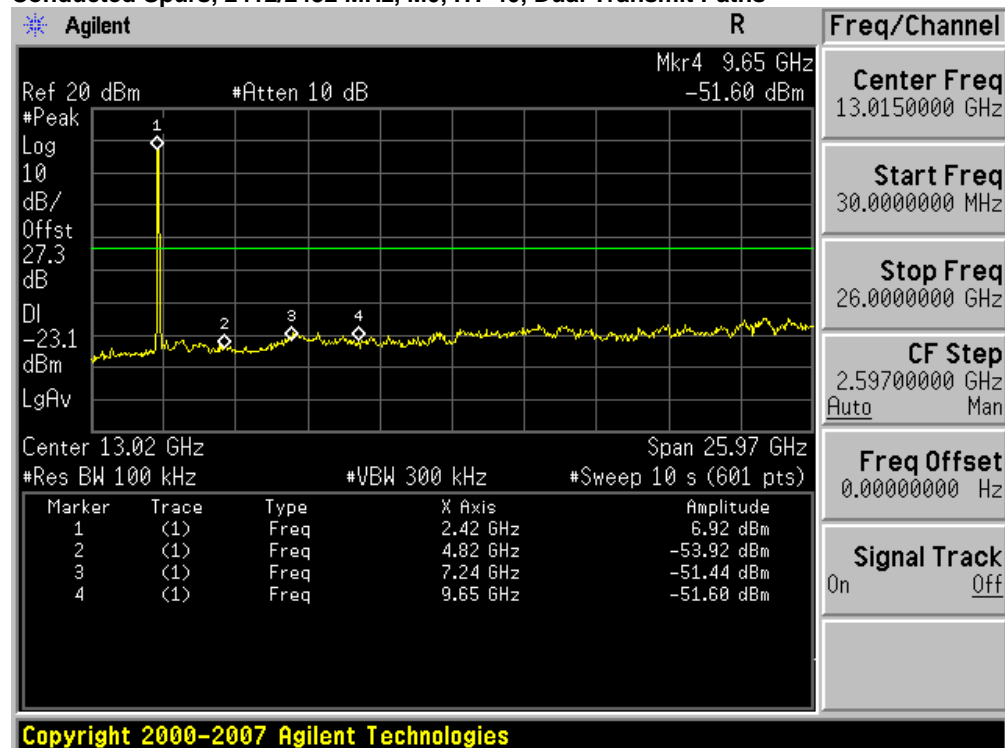


Conducted Spurs, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

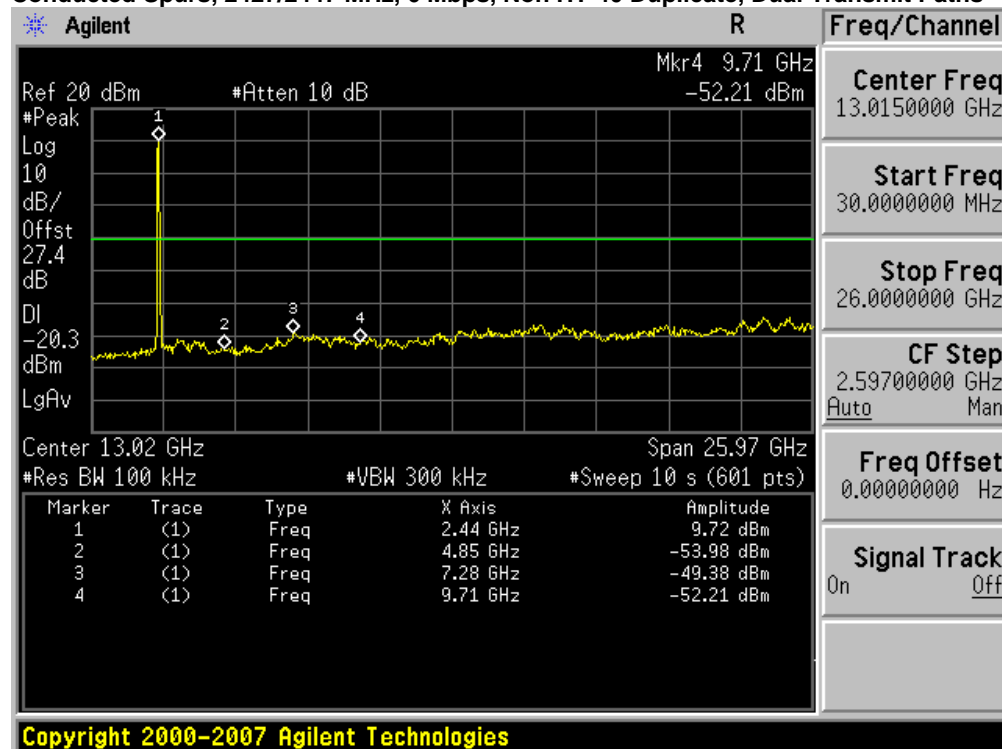


Conducted Spurs, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

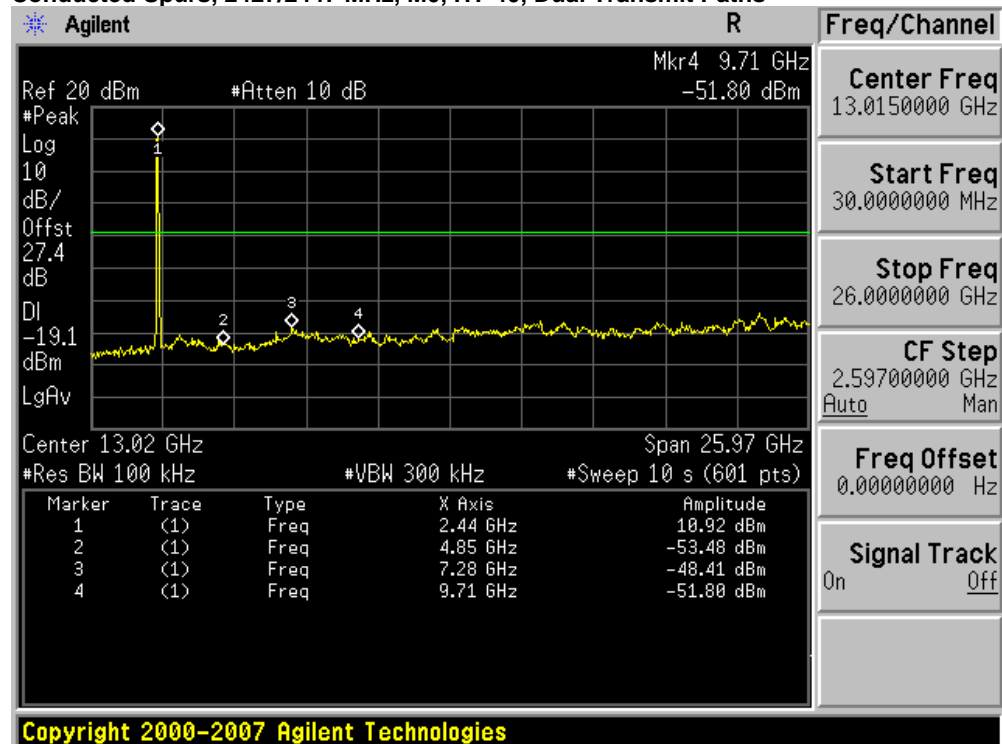


Conducted Spurs, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths

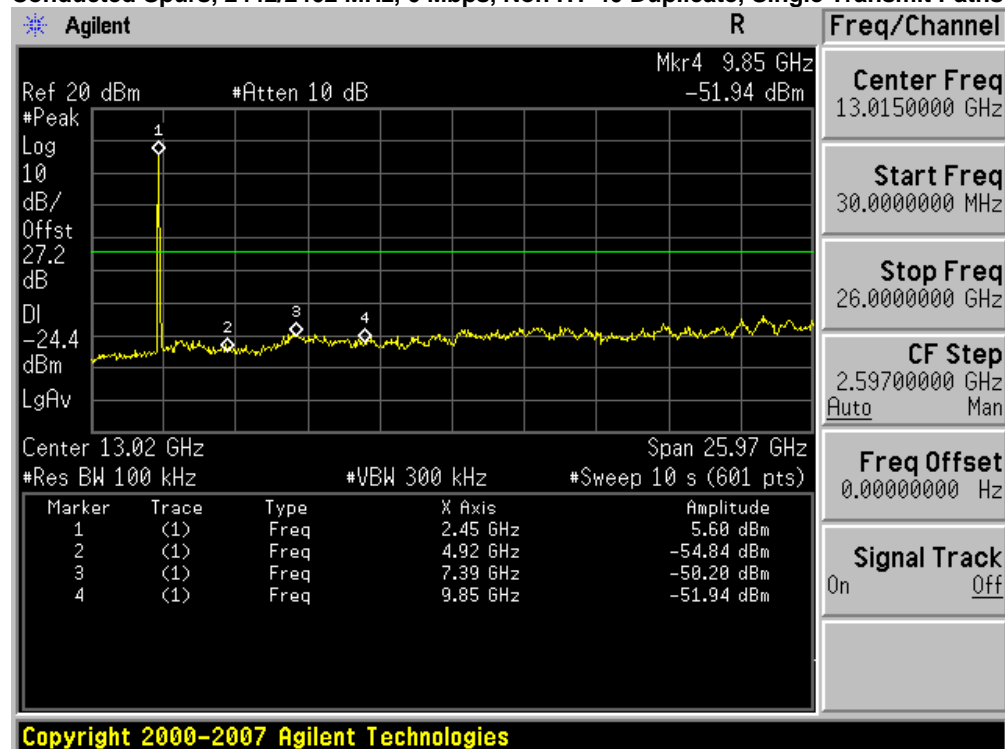


Conducted Spurs, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths

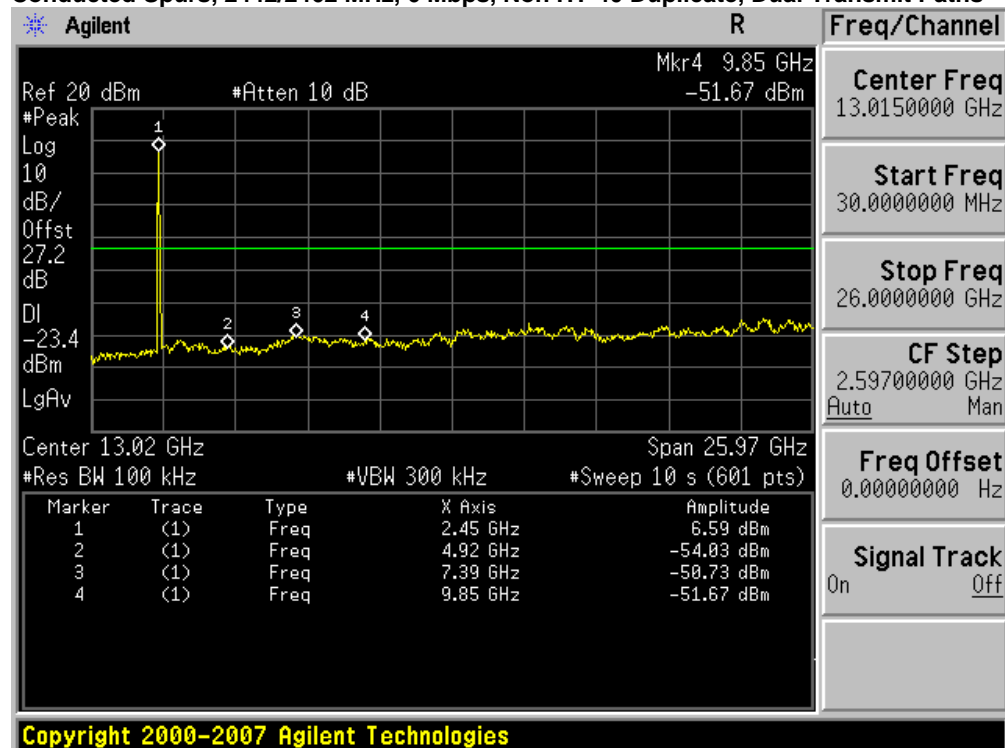


Conducted Spurs, 2442/2462 MHz, M0, HT-40, Single Transmit Paths

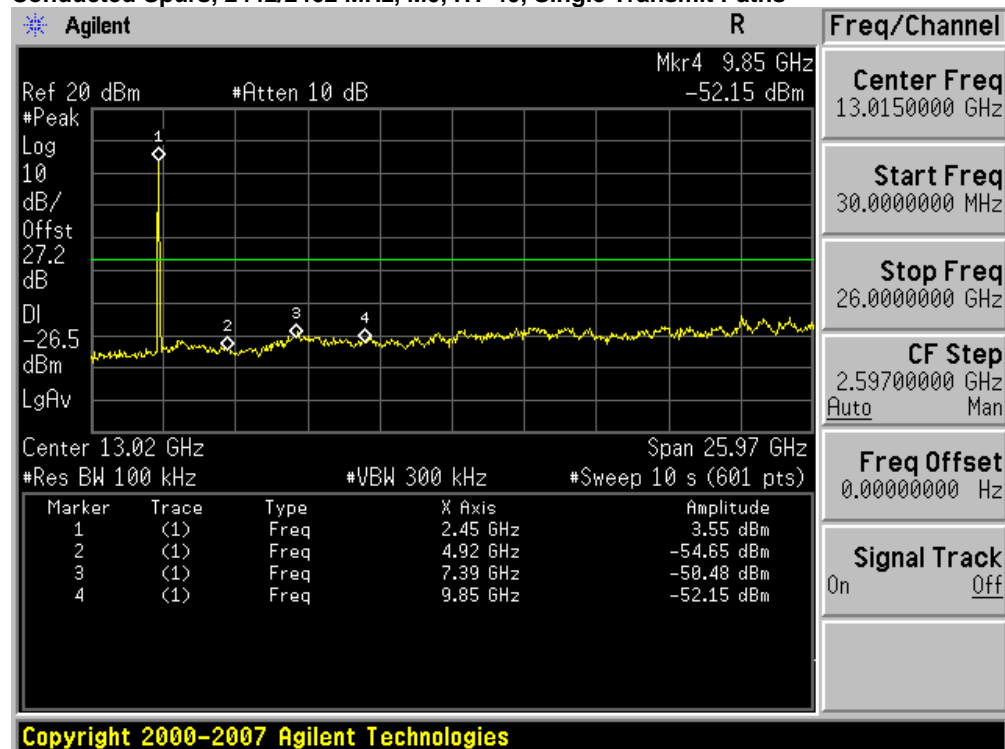

Conducted Spurs, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

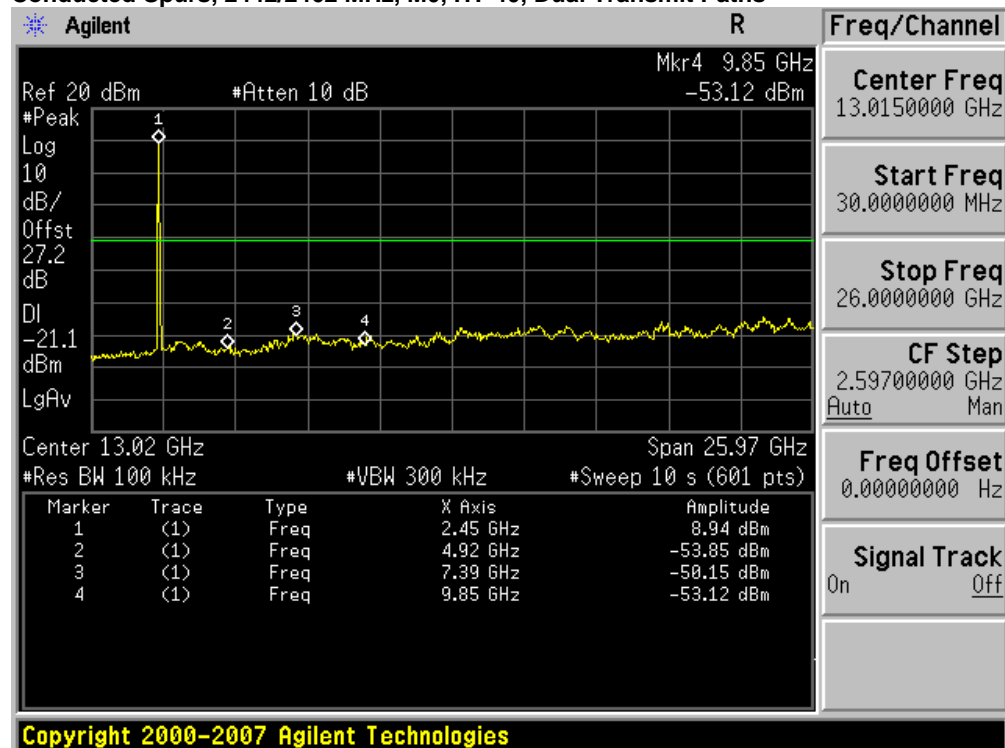

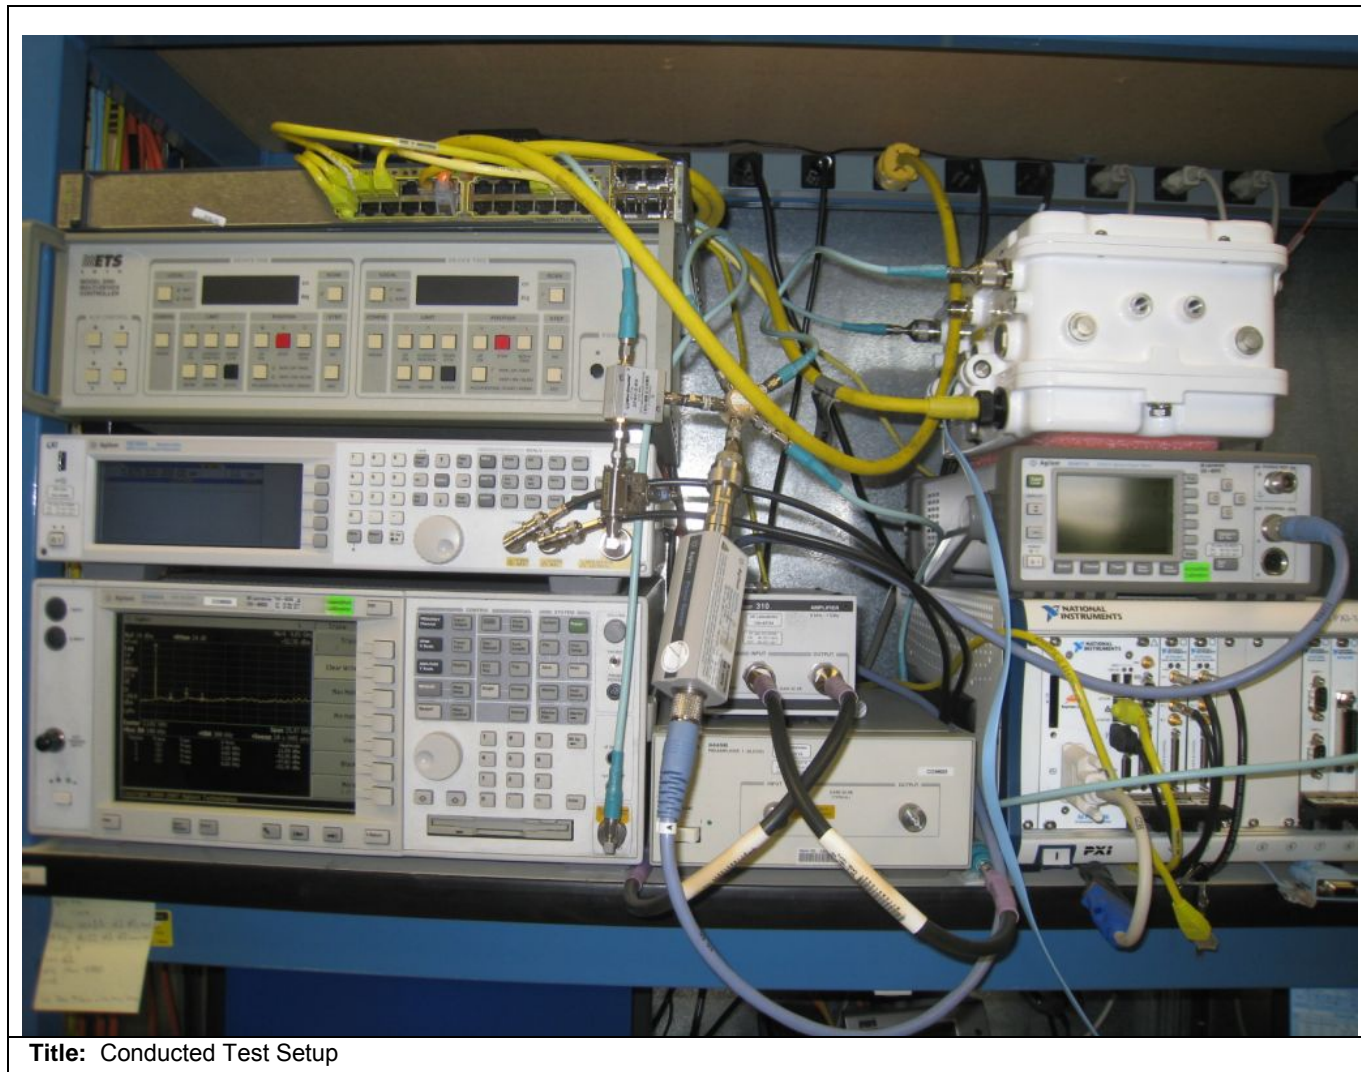

Title: Conducted Test Setup

Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Bandedge

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Reference Level:	110 dBuV
Attenuation:	20 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz



Video Bandwidth: 1 MHz for peak, 10 Hz for average
Detector: Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m
2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m


Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.




The following data reflects the worst-case emissions for all supported antennas from 0-2 dBi.

Frequency (MHz)	Mode	Data Rate (Mbps)	Target Total Transmit Power Level (dBm)	Radiated Band Edge Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	25	45.8	54	8.2
2412	Legacy CCK, Dual Tx Path	11	28	46.8	54	7.2
2412	Non HT-20, Single Tx Path	6	25	53.8	54	0.2
2412	Non HT-20, Dual Tx Path	6	27	52.4	54	1.6
2412	Non HT-20 Beam Forming	6	25	50.9	54	3.1
2462	Legacy CCK, Single Tx Path	11	25	44.7	54	9.3
2462	Legacy CCK, Dual Tx Path	11	28	47.2	54	6.9
2462	Non HT-20, Single Tx Path	6	25	50.9	54	3.1
2462	Non HT-20, Dual Tx Path	6	26	49.8	54	4.2
2462	Non HT-20 Beam Forming	6	25	50.1	54	3.9
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	20	53.7	54	0.3
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	21	51.2	54	2.8
2412/2432	HT-40, Single Tx Path	m0	21	51.2	54	2.8
2412/2432	HT-40, Dual Tx Path	m0	23	50.2	54	3.8
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	21	48.2	54	5.8
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	22	47.4	54	6.6
2442/2462	HT-40, Single Tx Path	m0	21	46.2	54	7.8
2442/2462	HT-40, Dual Tx Path	m0	22	46.4	54	7.6


Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average

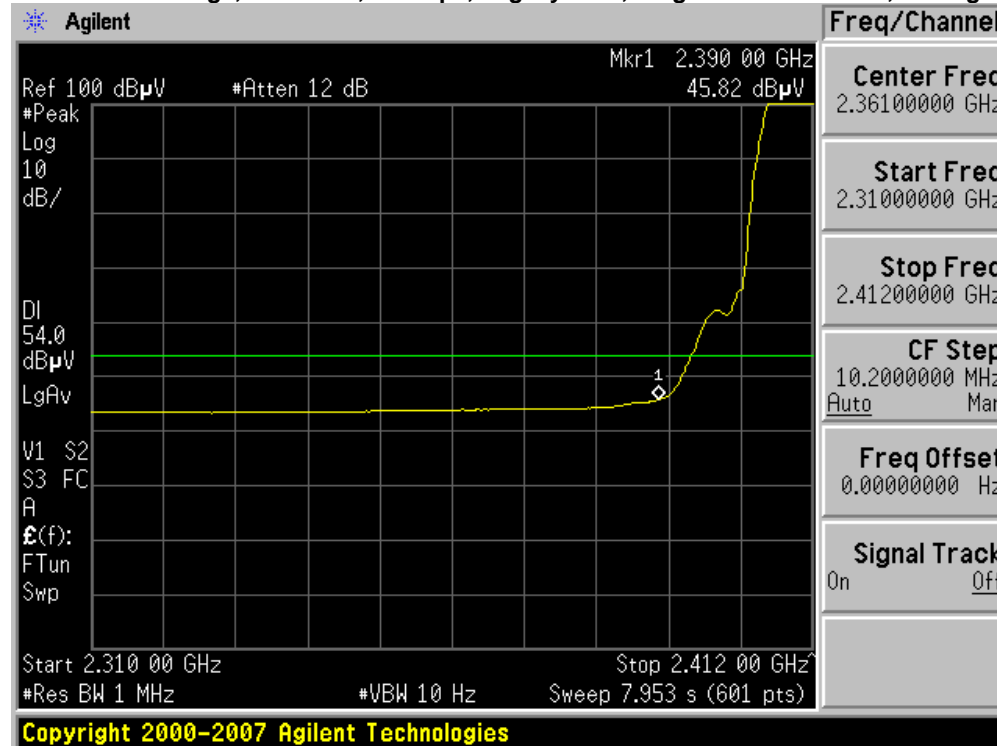


Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average

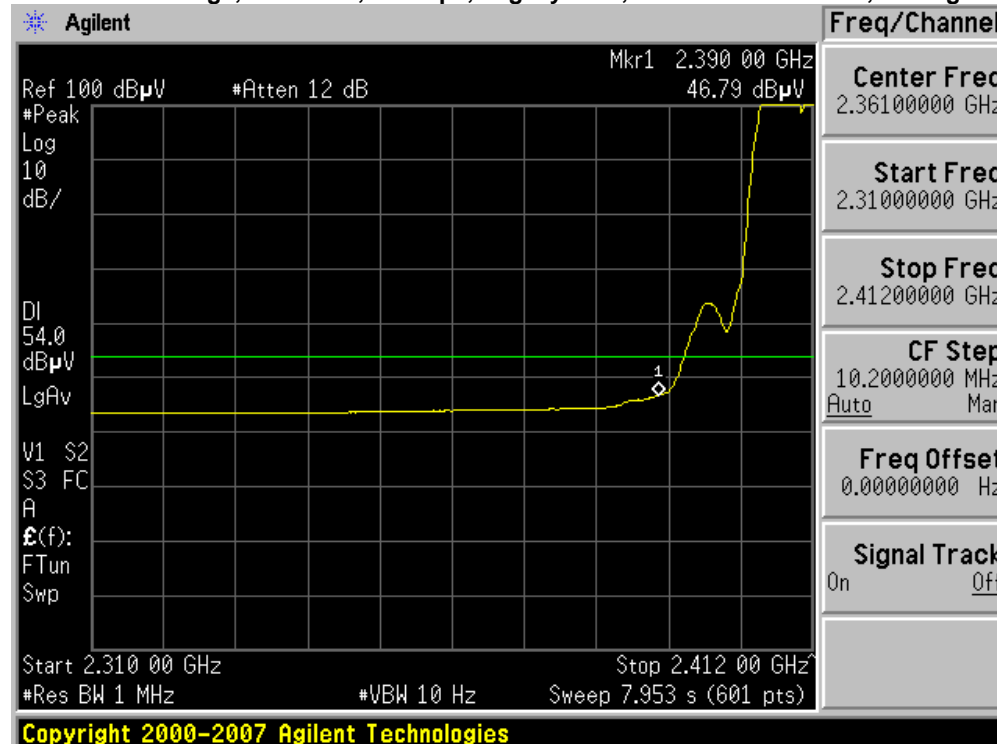


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths, Average

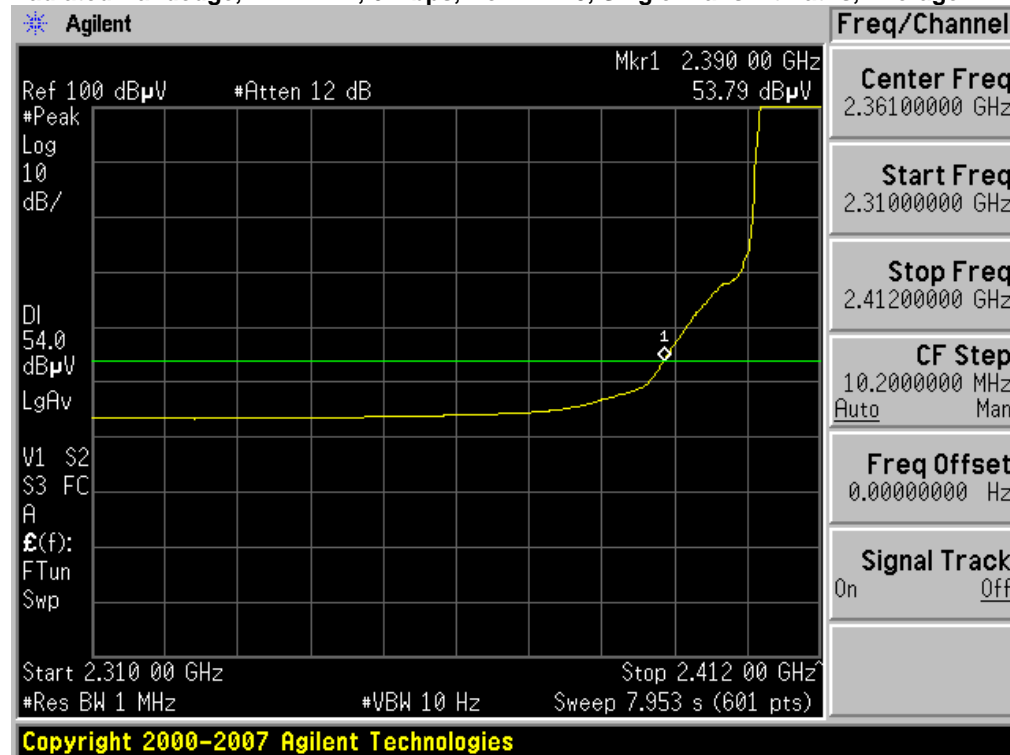


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths, Average

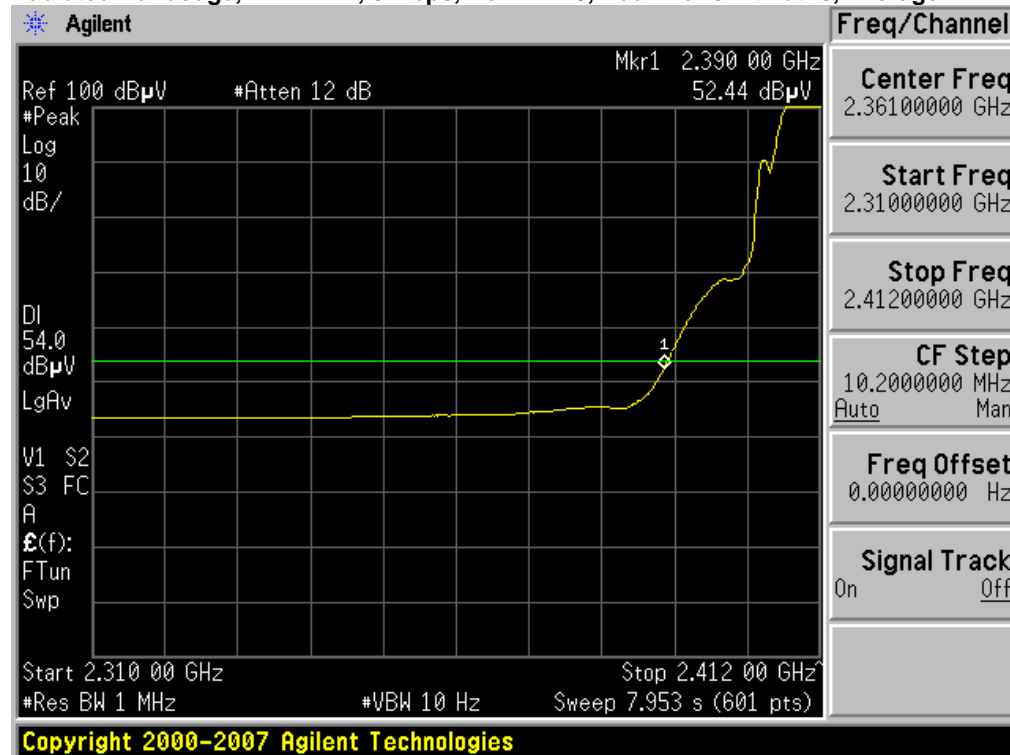


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average

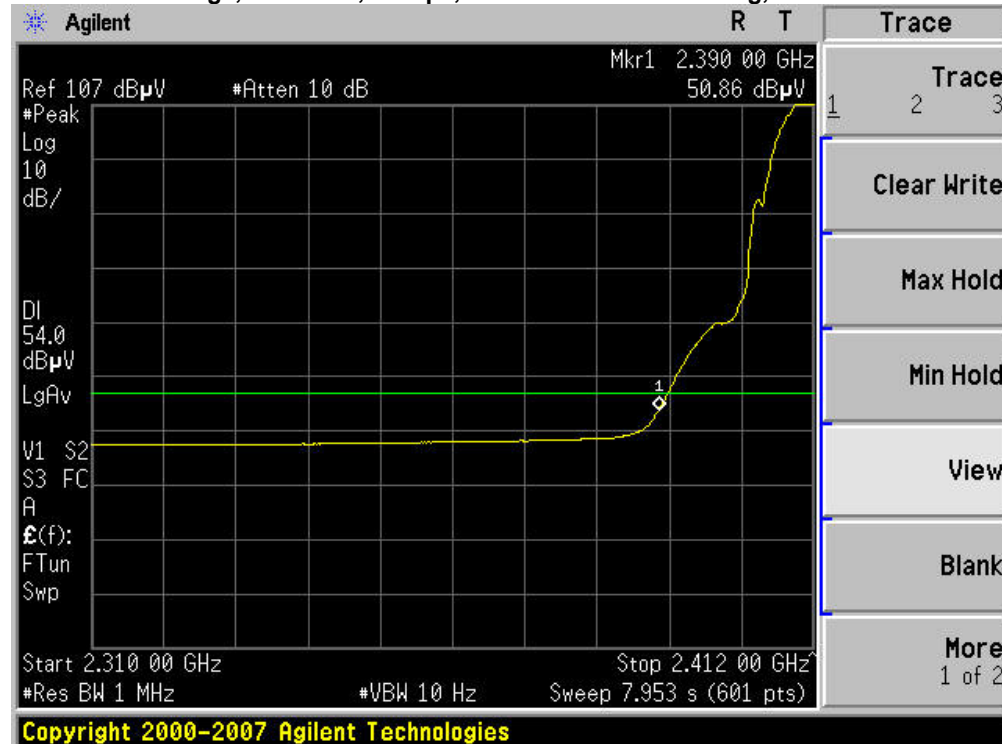


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average

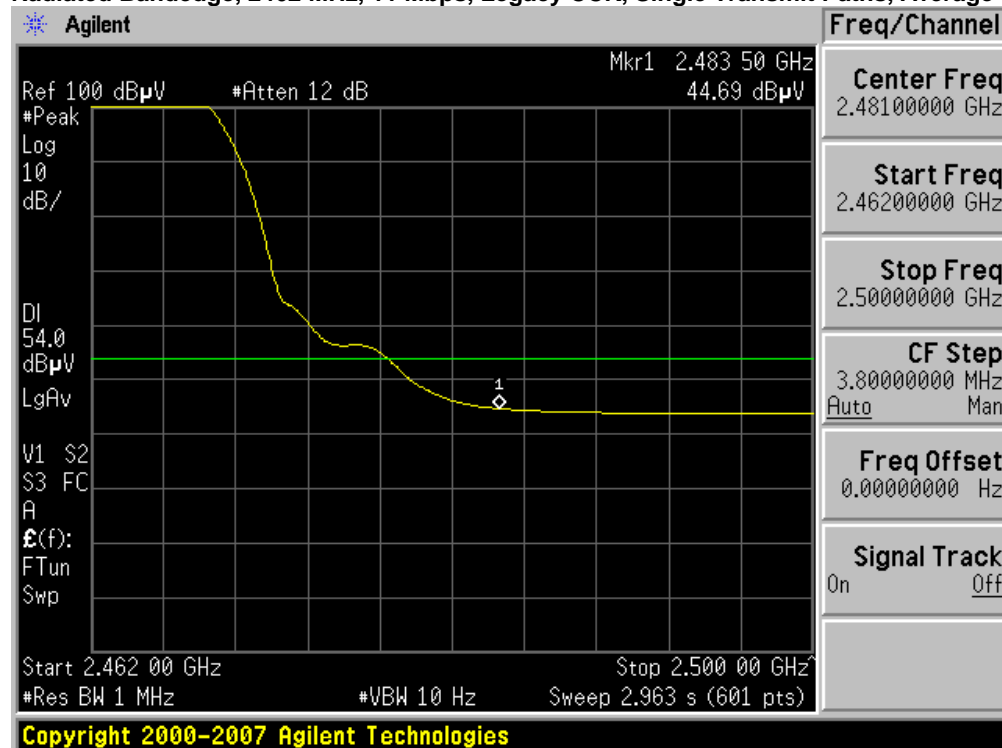


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average

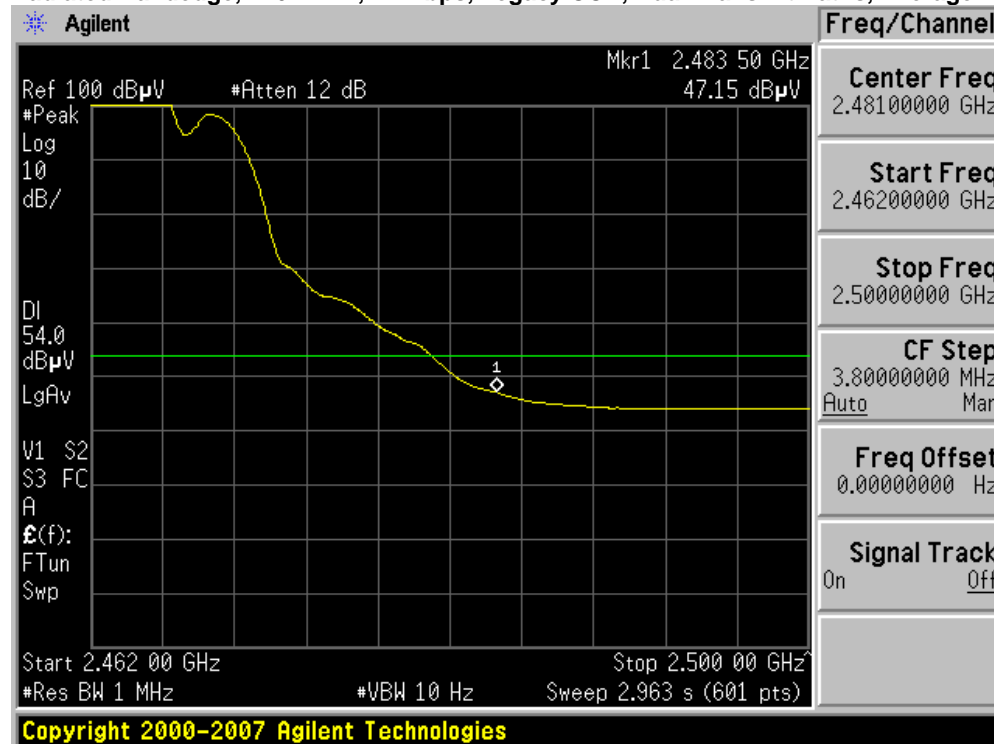


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths, Average

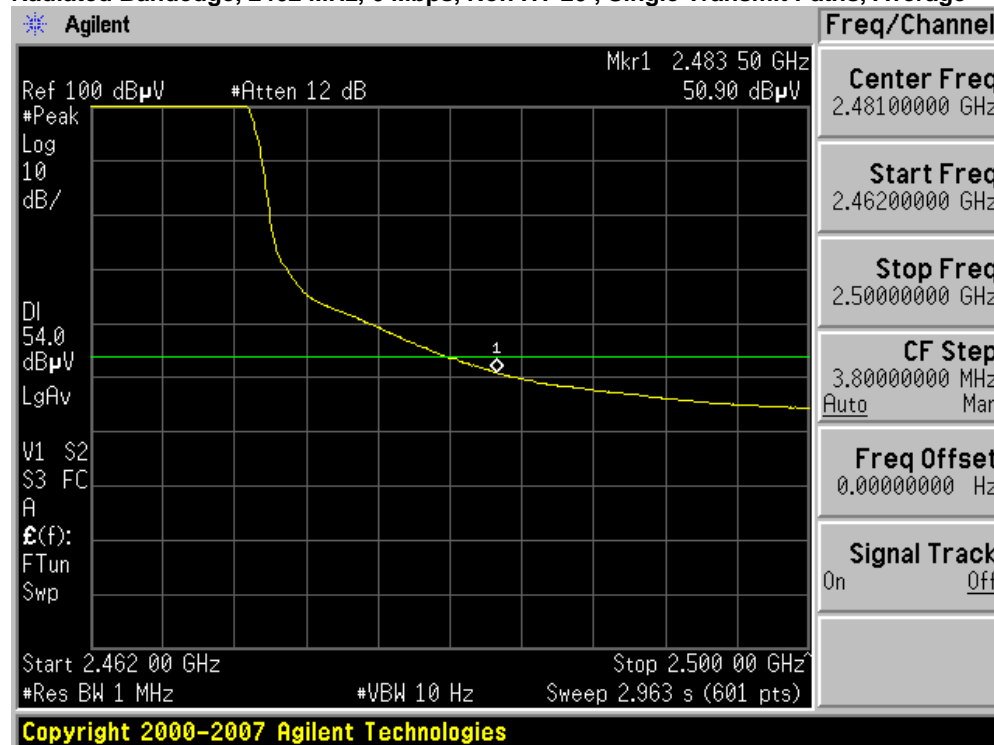

Radiated Bandedge, 2462 MHz, 54 Mbps, Non HT-20, Dual Transmit Paths, Average

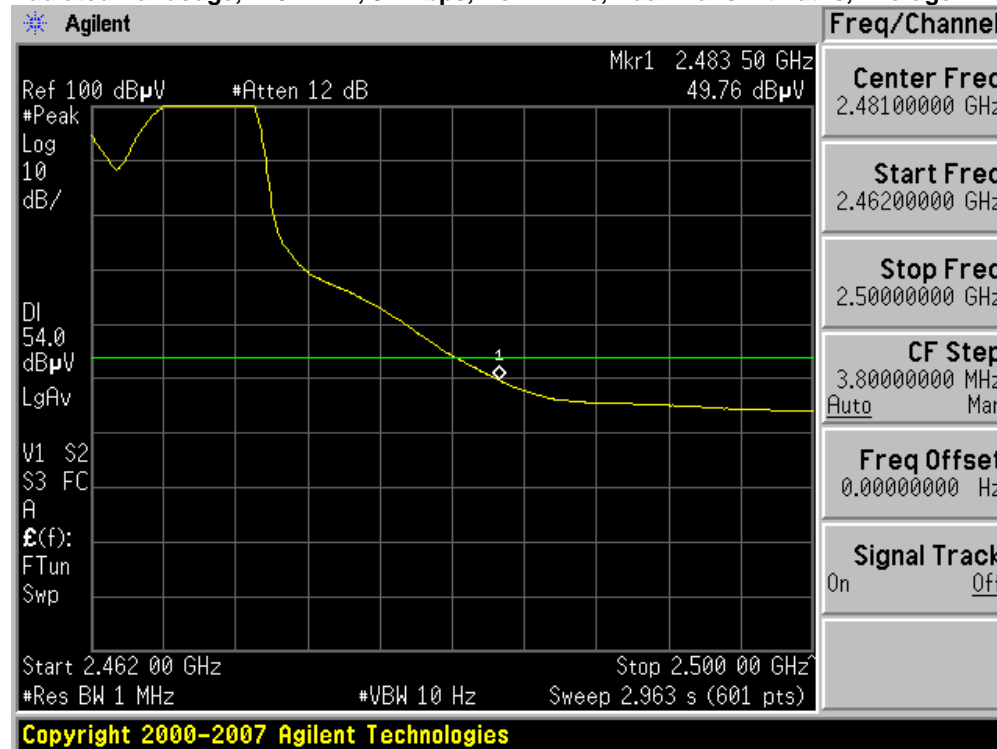


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average

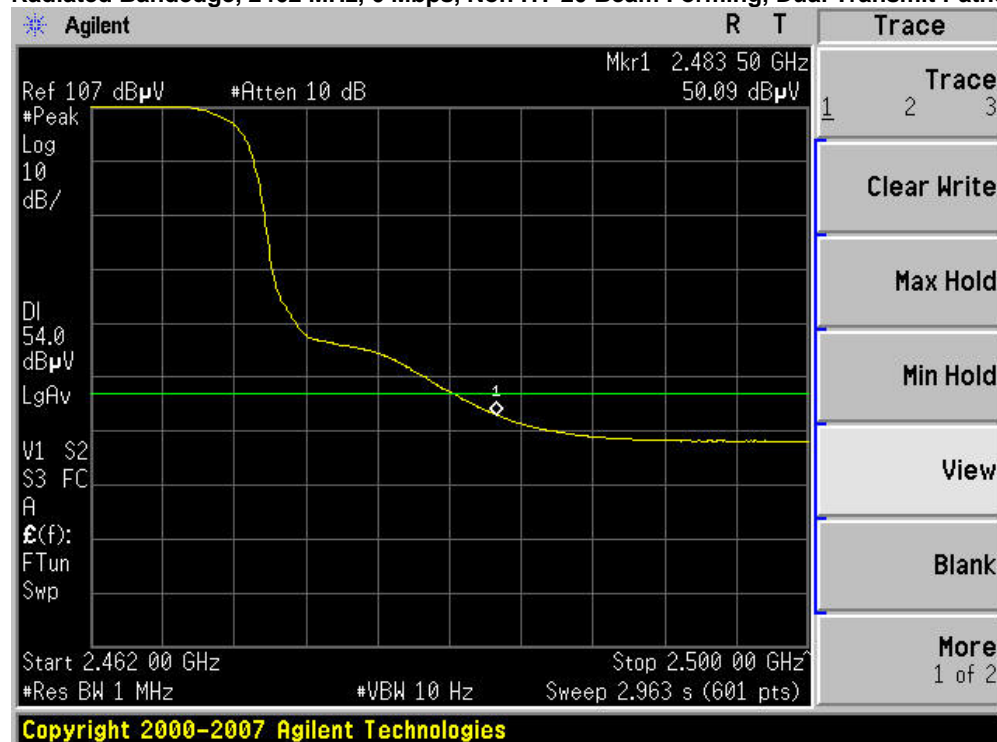





Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average

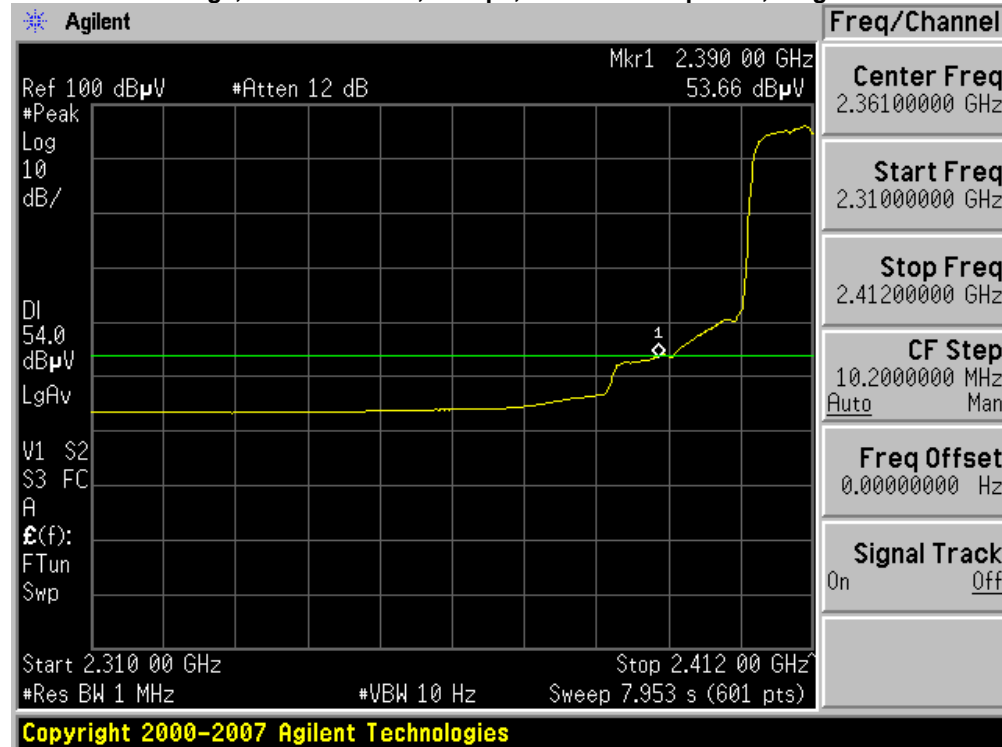


Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average

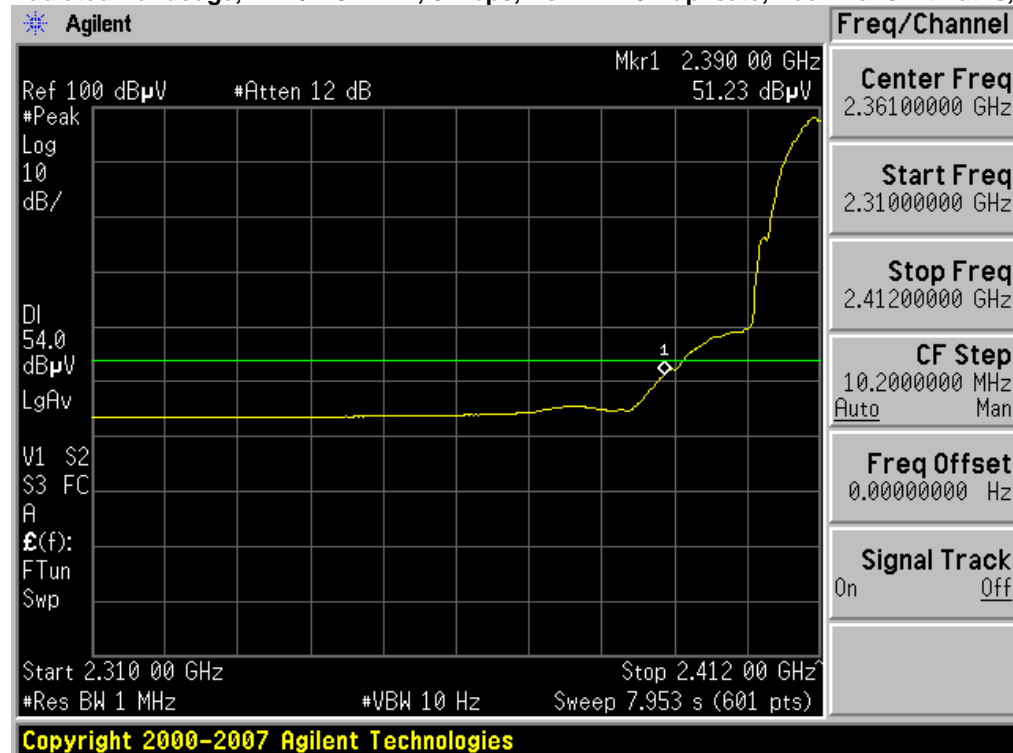


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Single Transmit Paths, Average

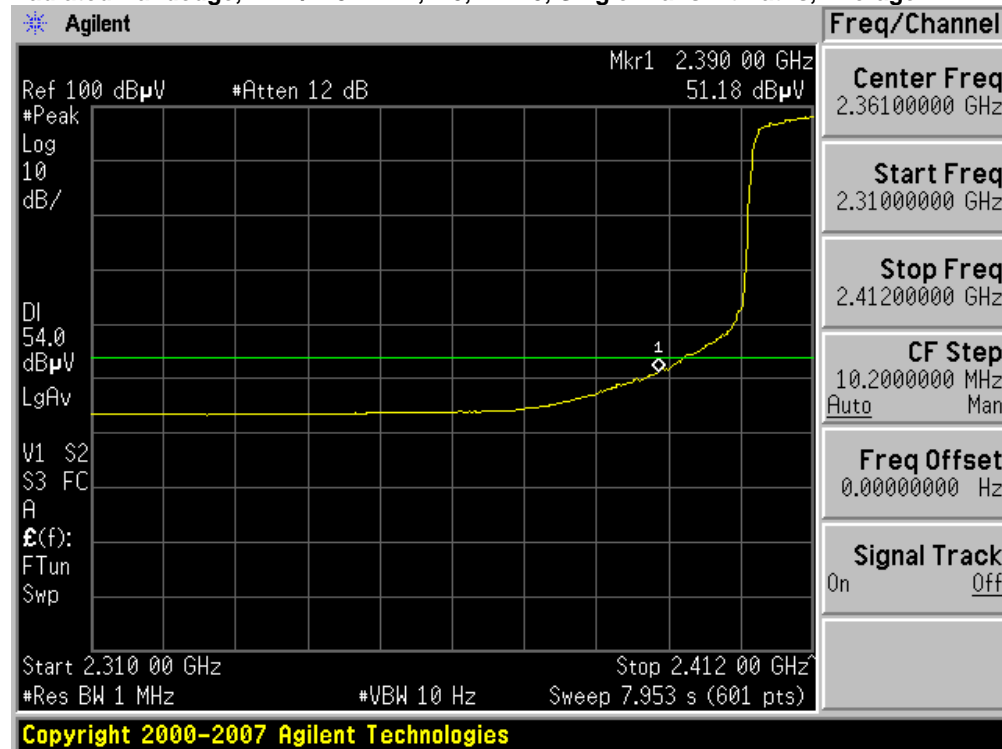


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Average

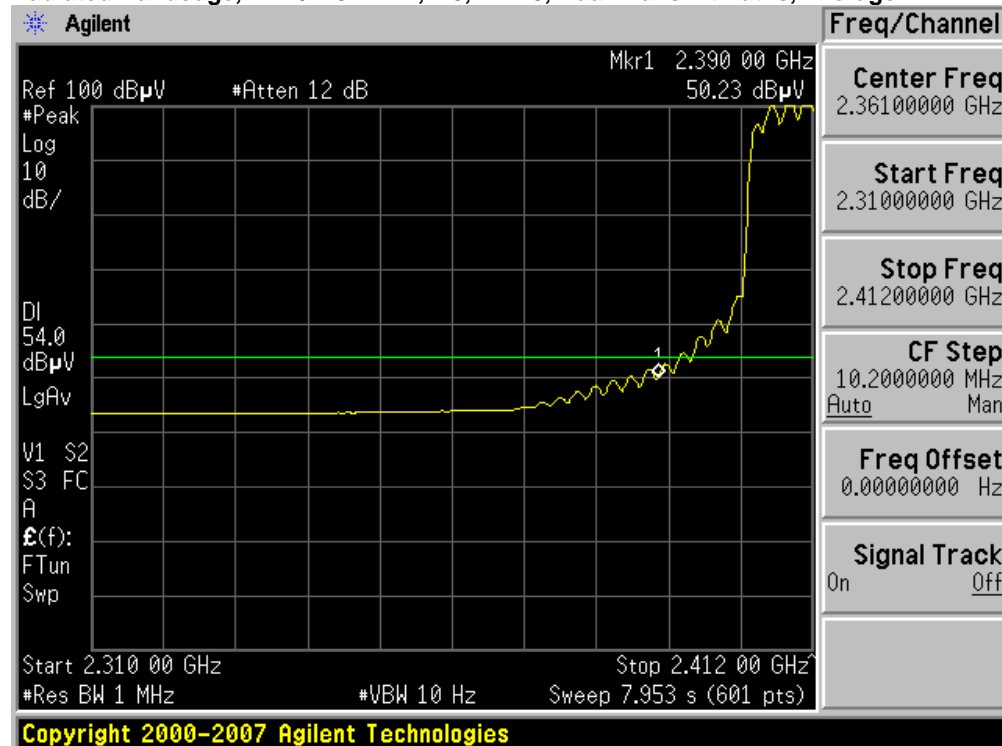


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average

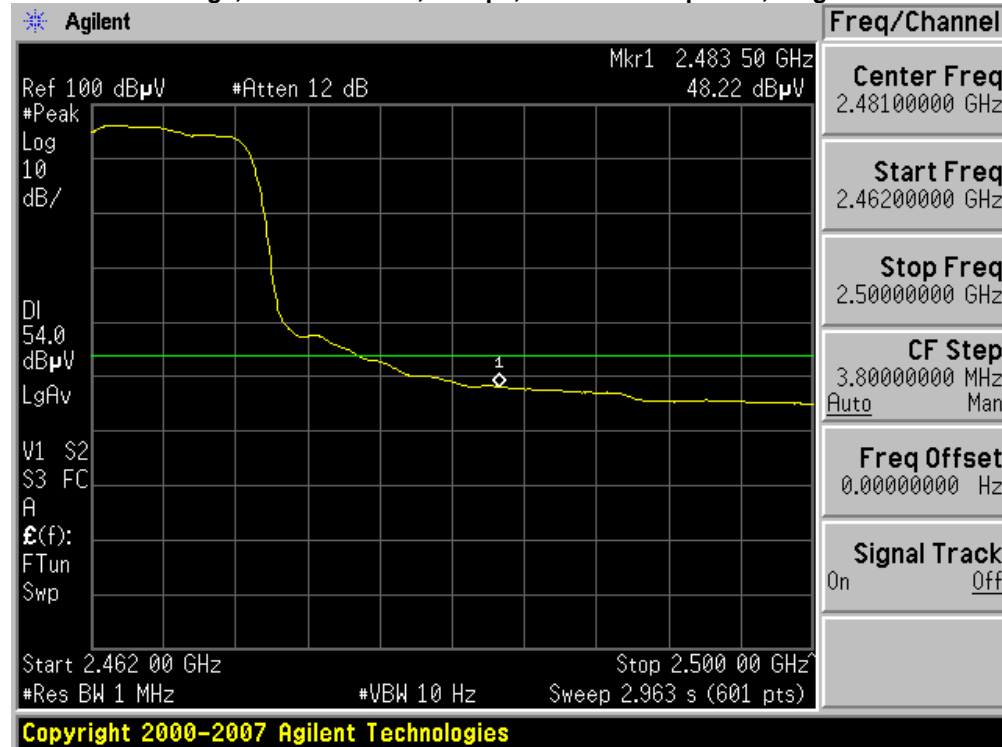


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average

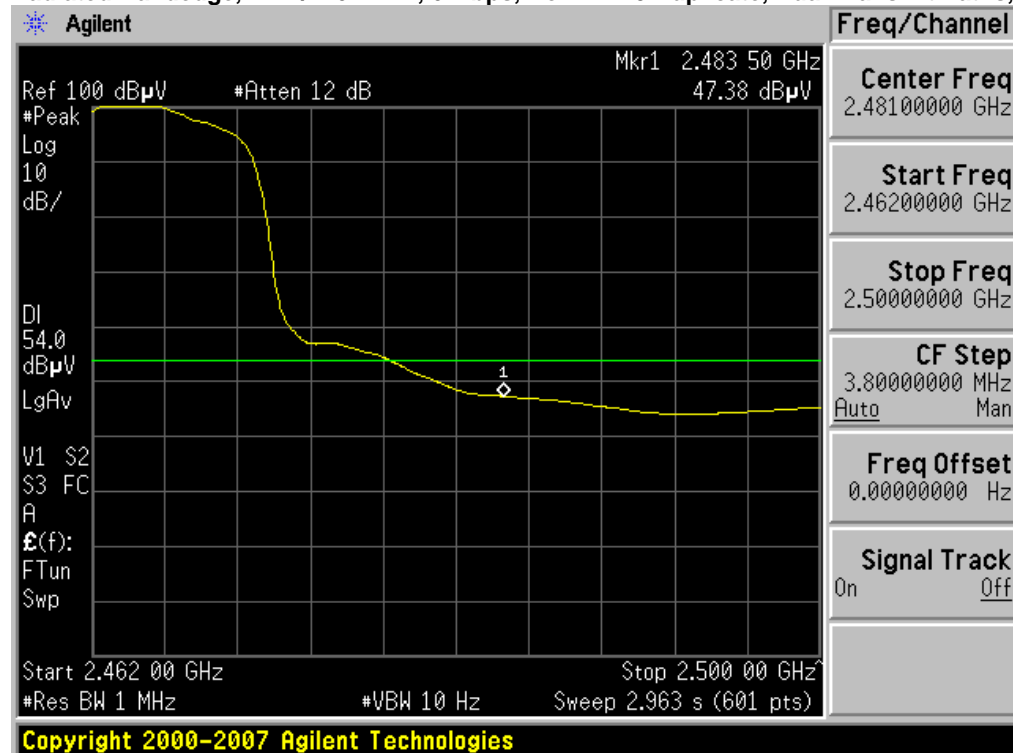


Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Single Transmit Paths, Average

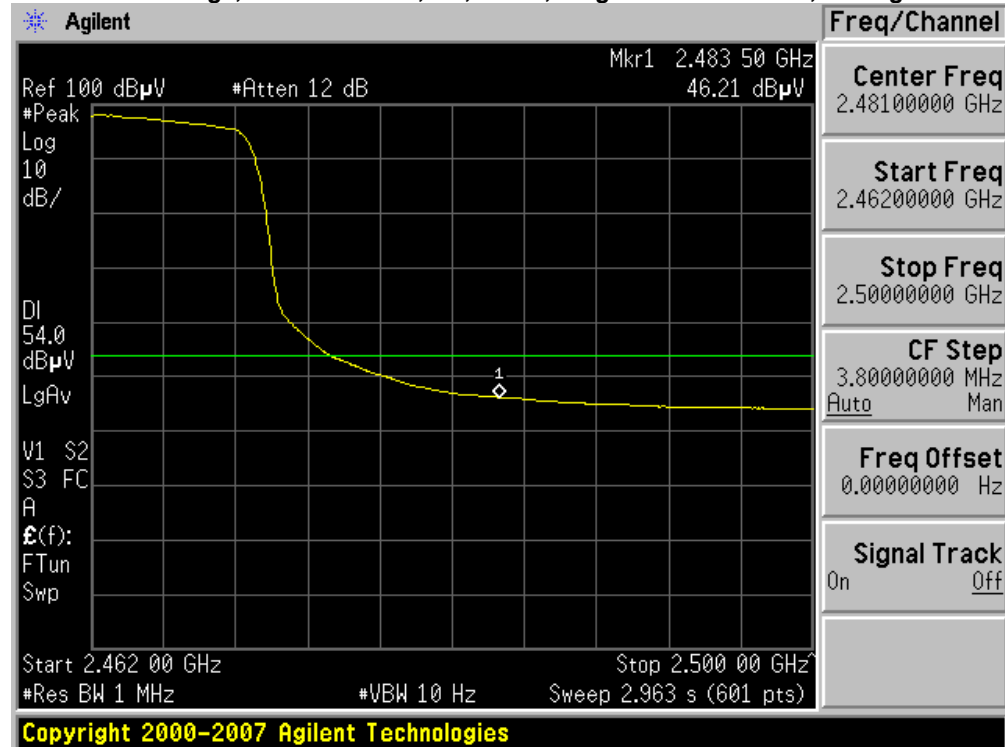


Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Average

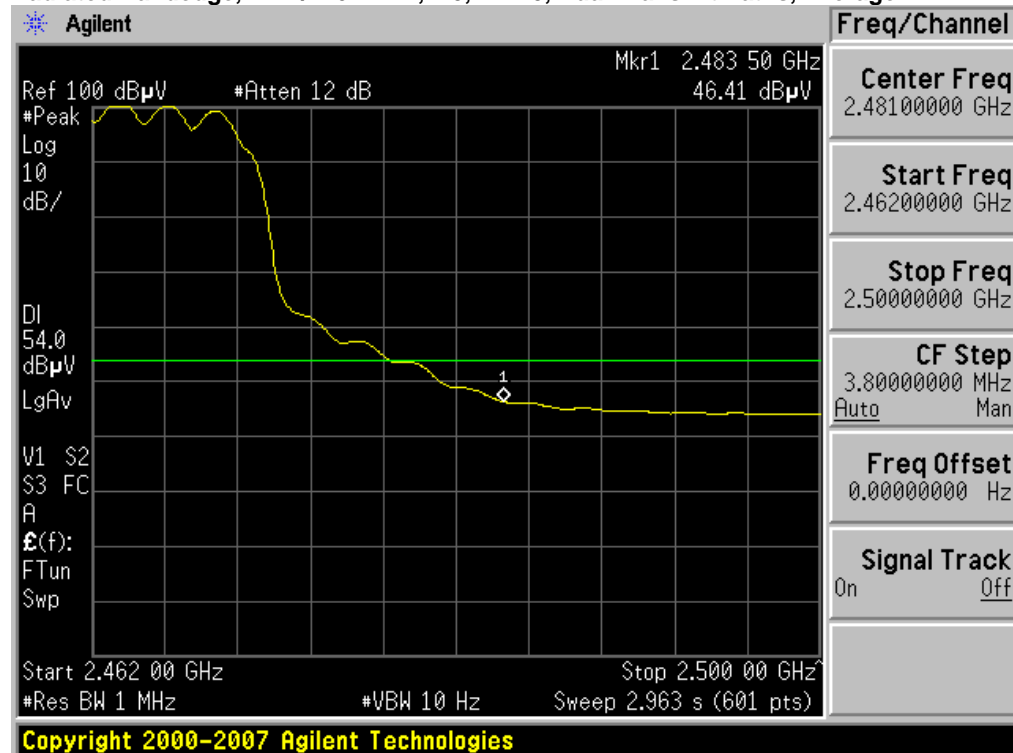


Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak

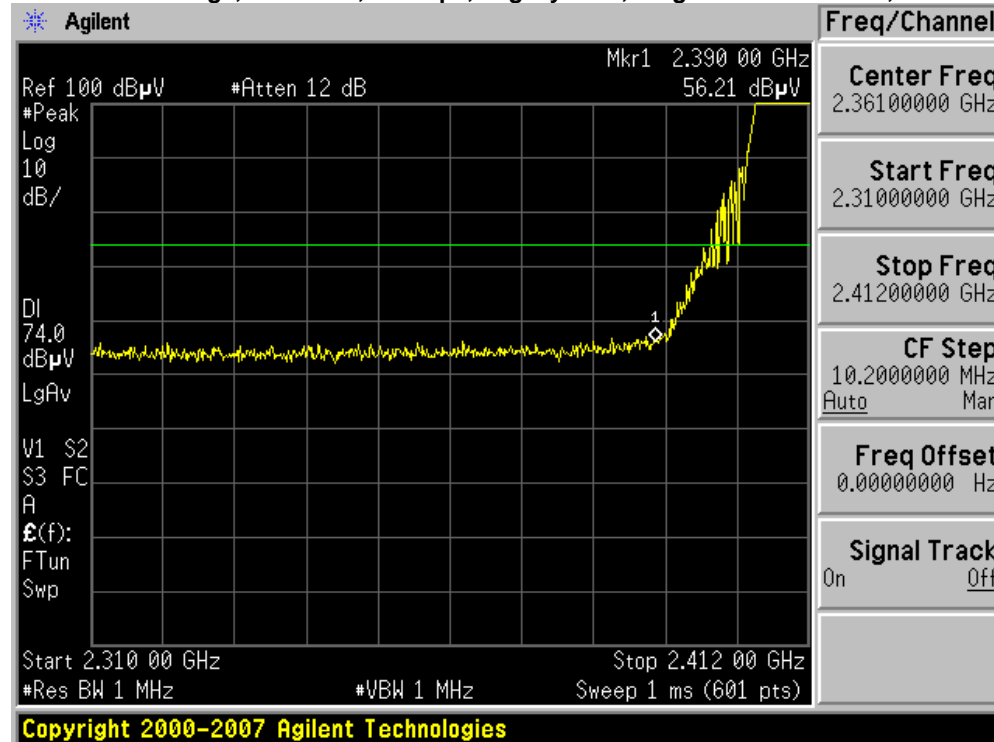


Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak

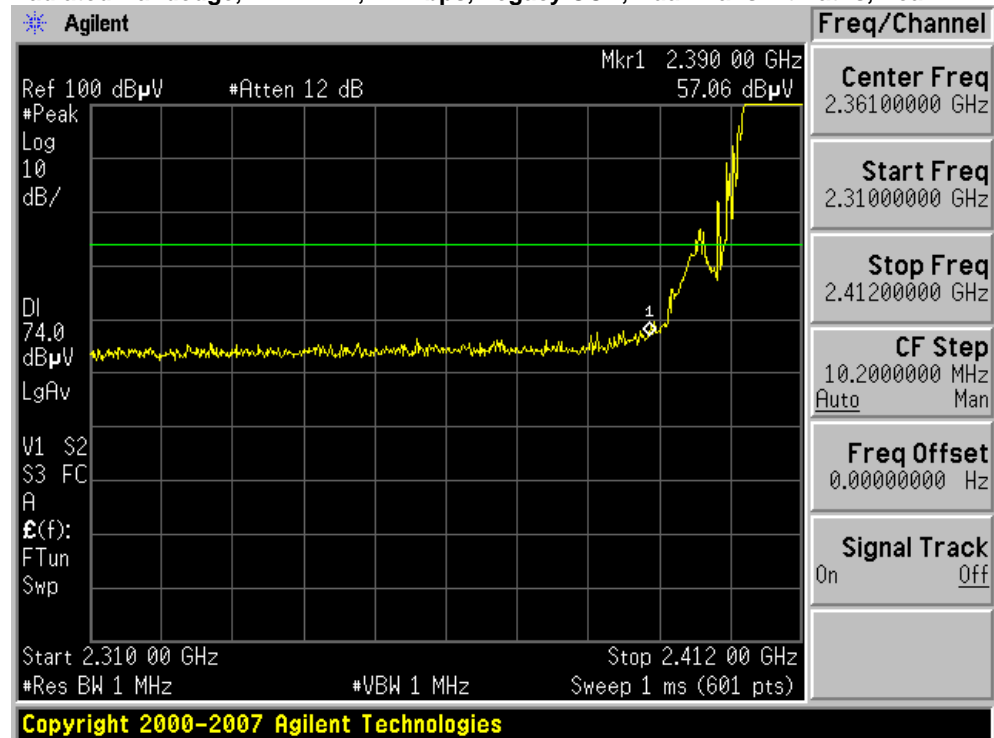


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths, Peak

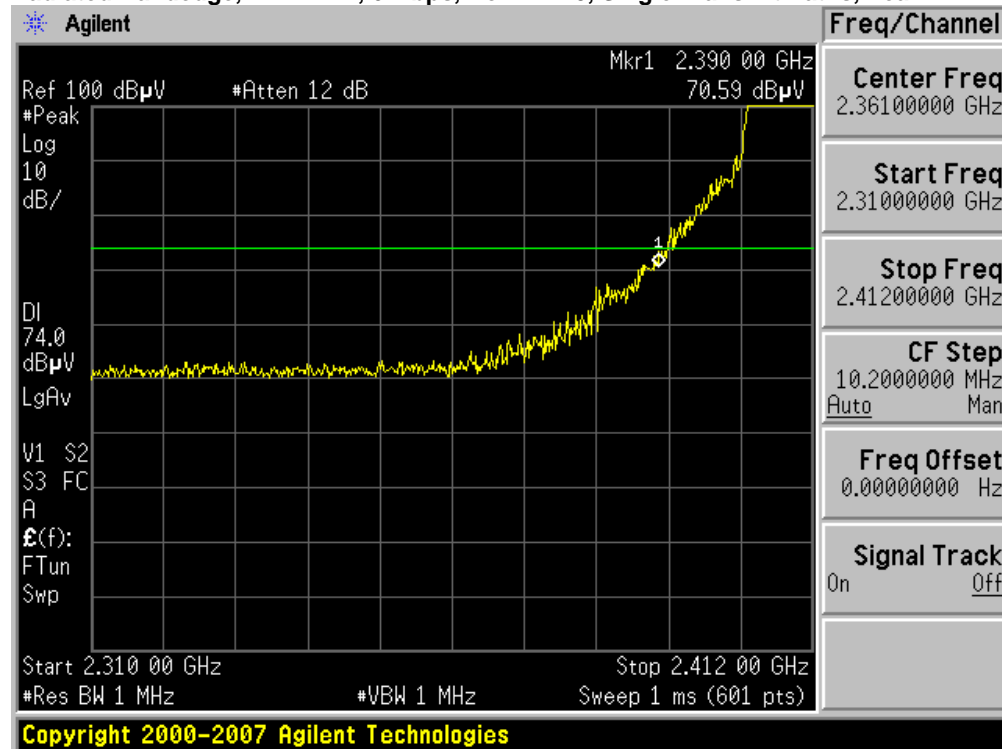


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths, Peak

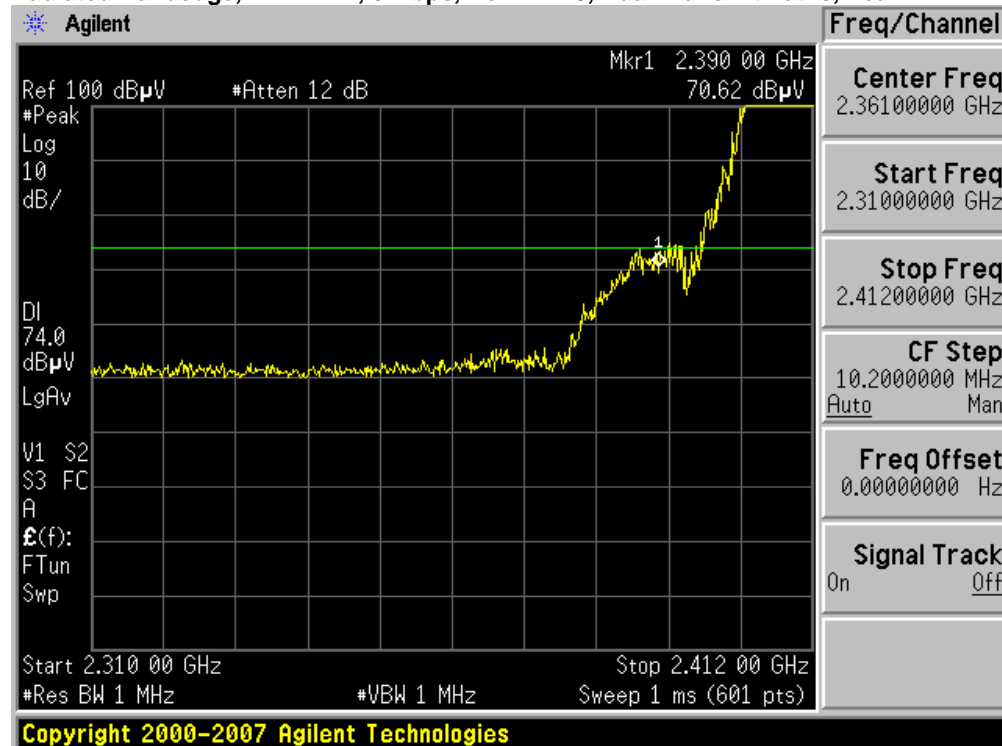


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak

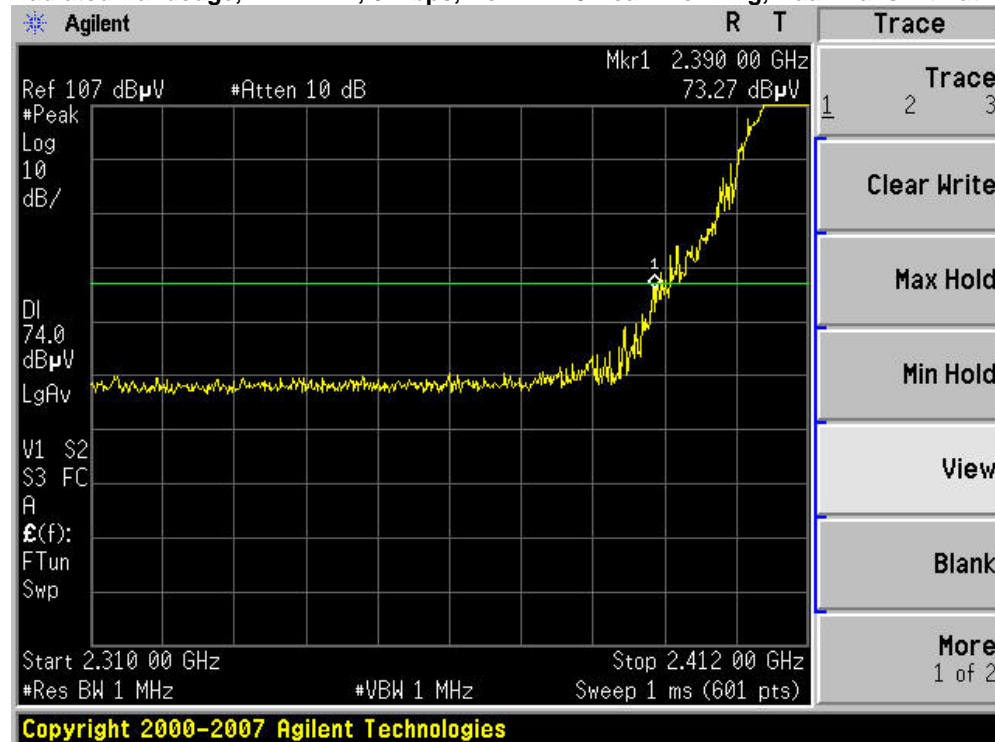


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak

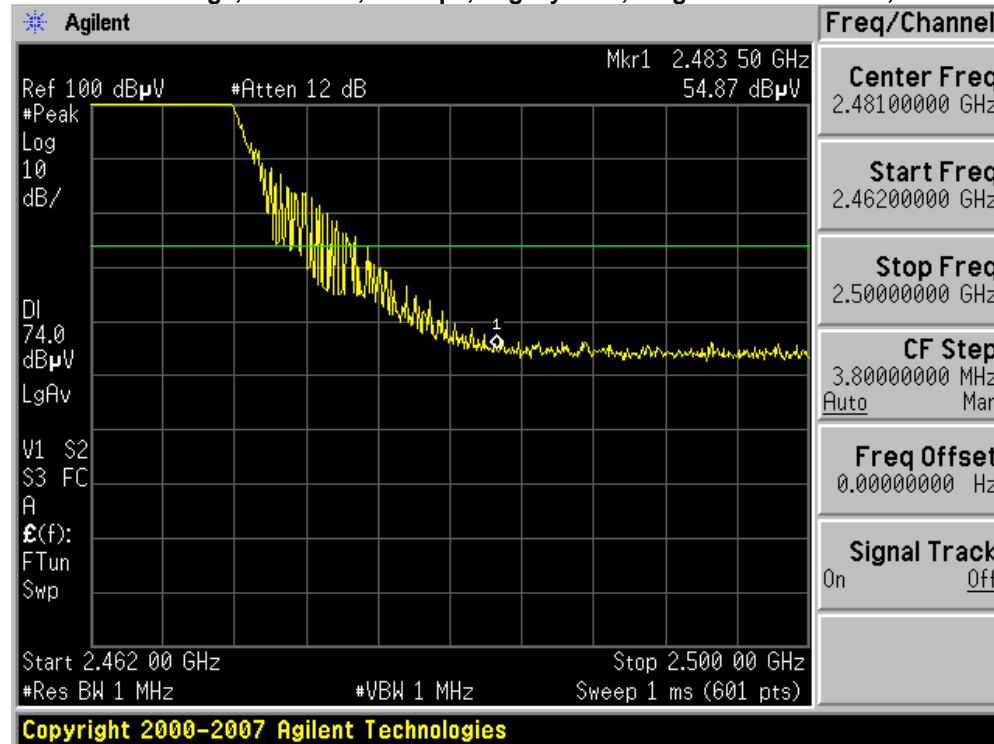


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak

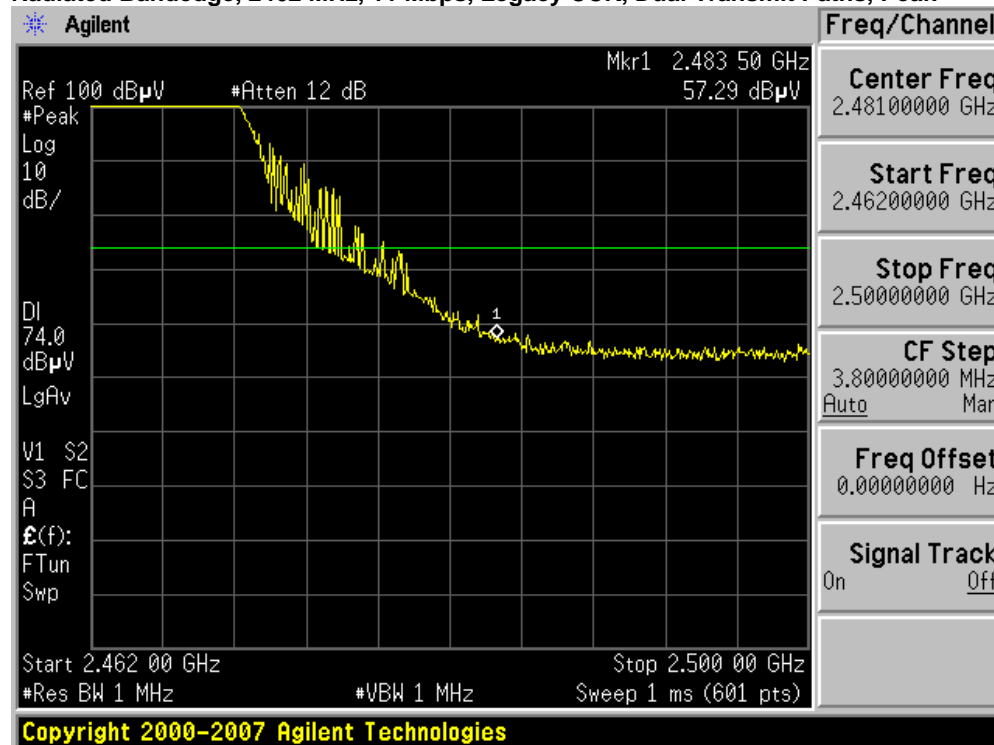


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths, Peak

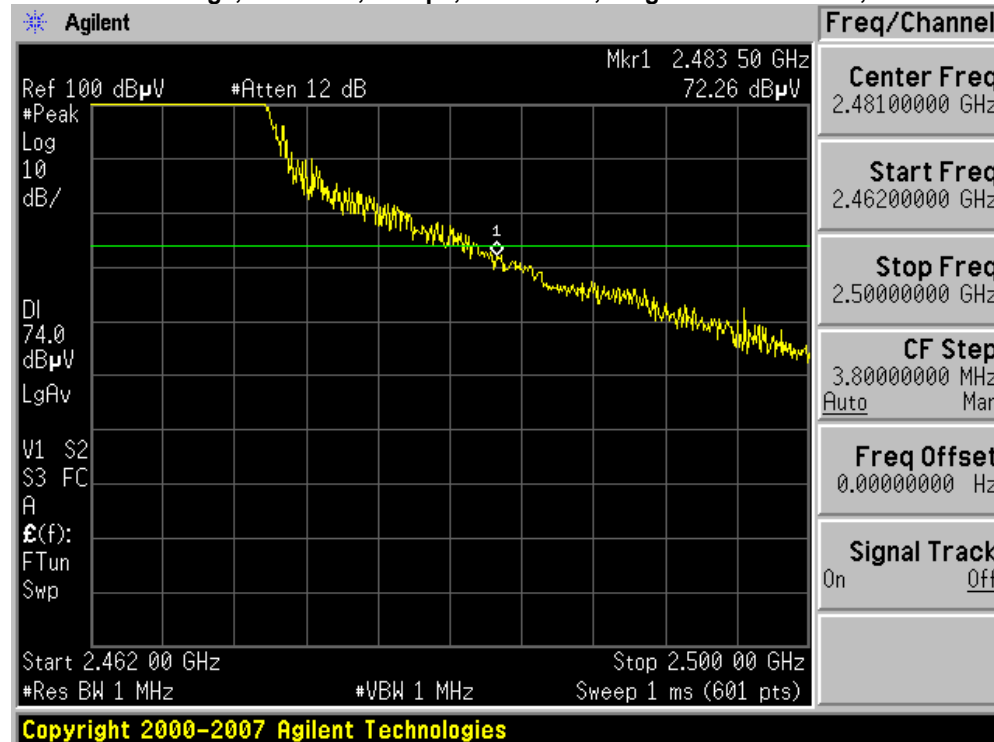


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths, Peak

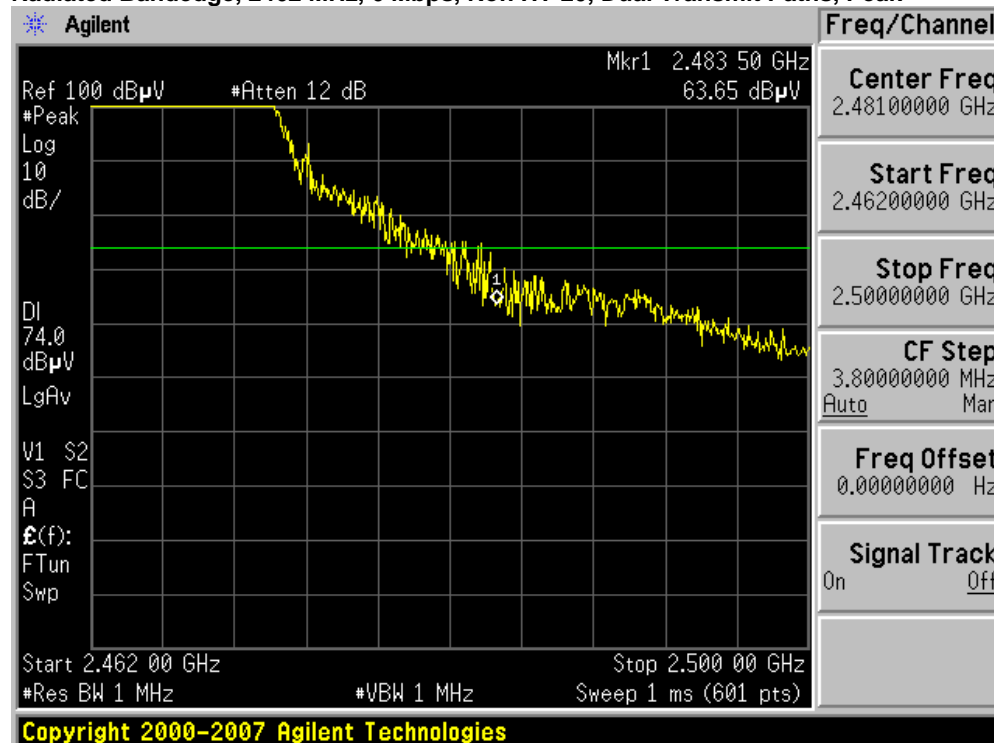


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak

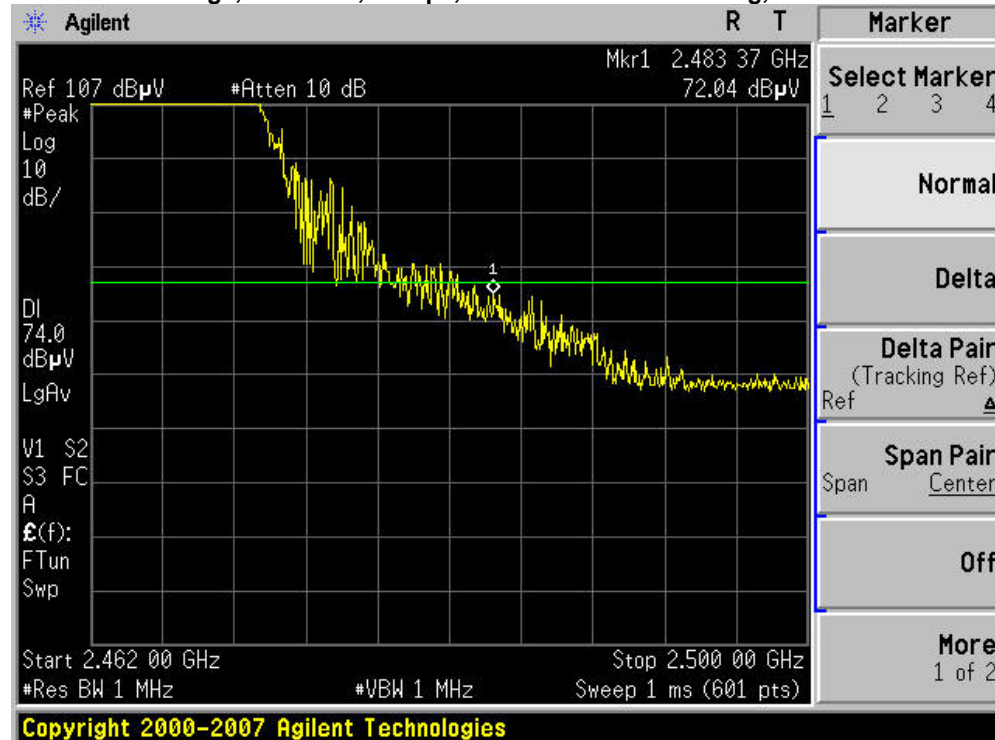


Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak

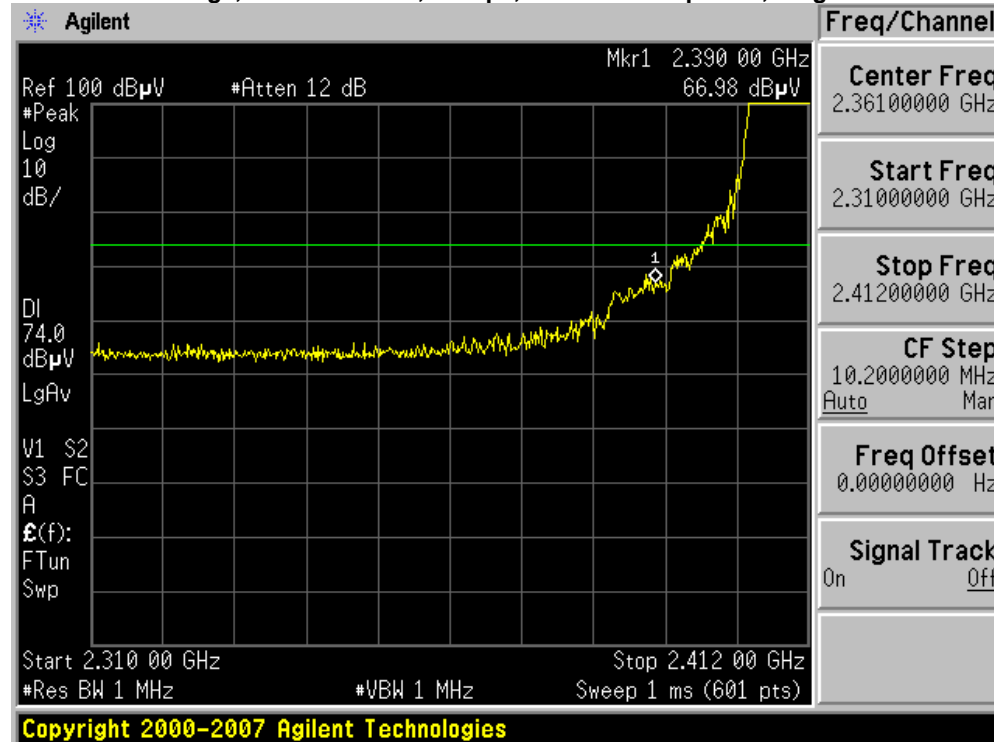


Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak

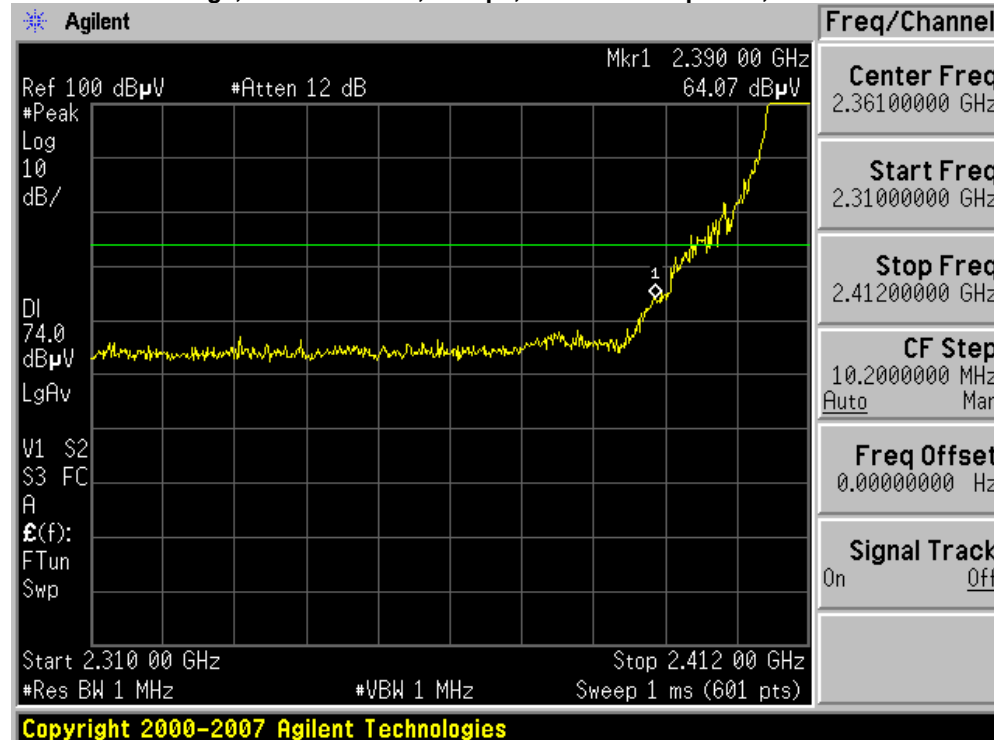


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Single Transmit Paths, Peak

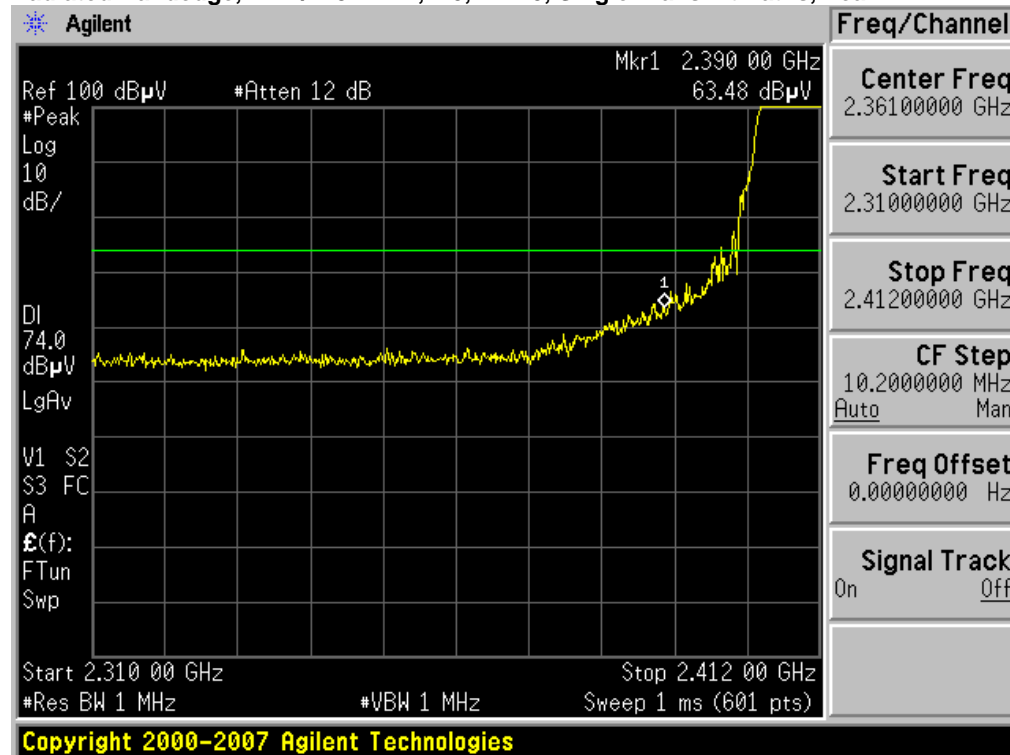


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Peak

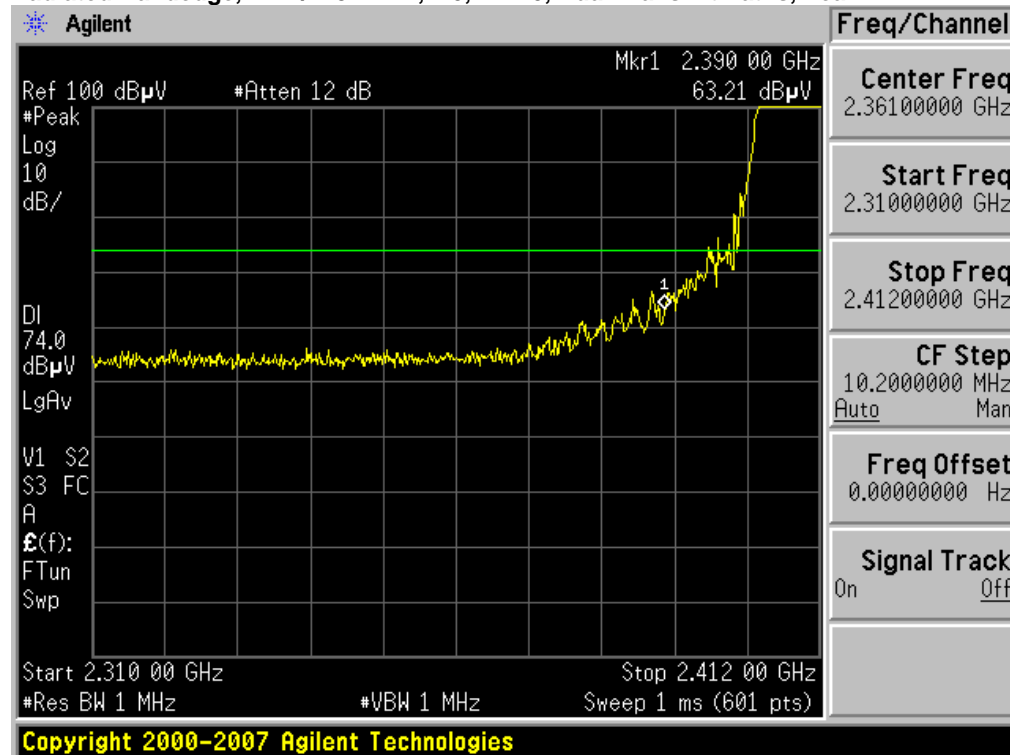


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak

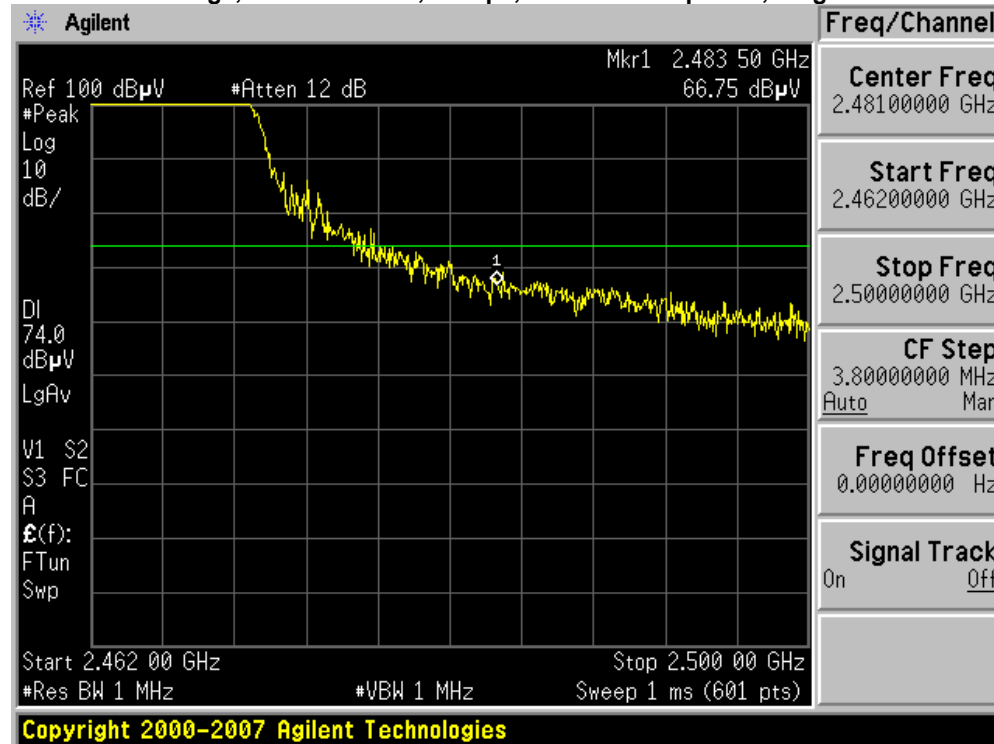


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak

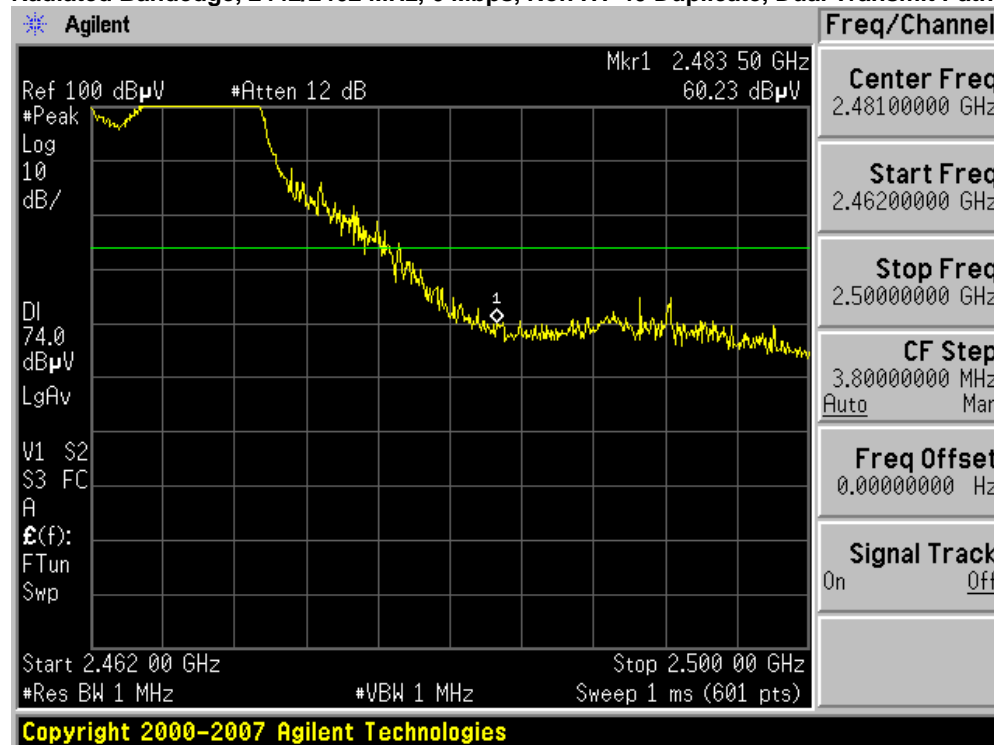

Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Single Transmit Paths, Peak

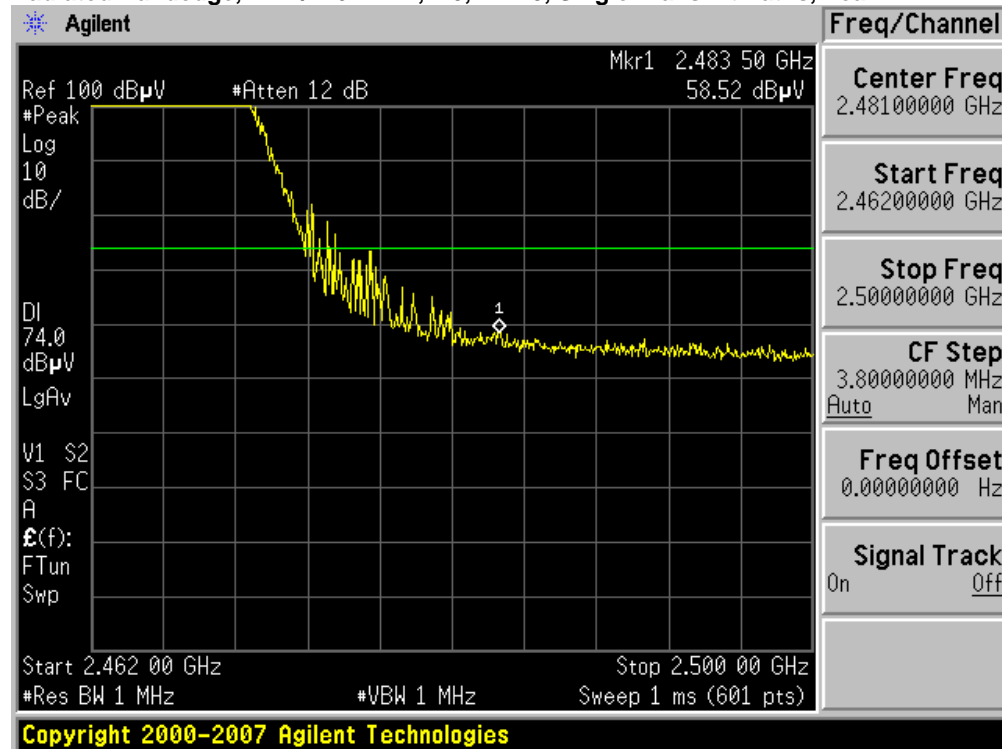



Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Peak

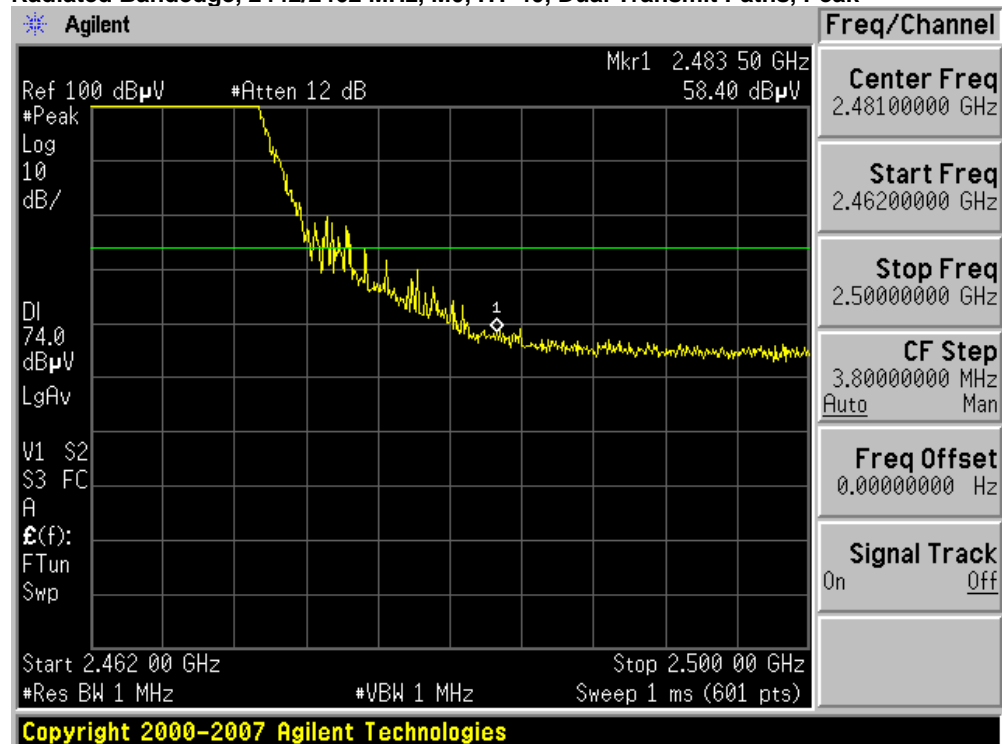




The following data reflects the worst-case emissions for all supported antennas from 2.1-4 dBi.


Frequency (MHz)	Mode	Data Rate (Mbps)	Target Total Transmit Power Level (dBm)	Radiated Band Edge Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, Single Tx Path	11	25	47.8	54	6.2
2412	Legacy CCK, Dual Tx Path	11	28	49.0	54	5.0
2412	Non HT-20, Single Tx Path	6	24	53.0	54	1.0
2412	Non HT-20, Dual Tx Path	6	26	52.4	54	1.6
2412	Non HT-20 Beam Forming	6	25	53.9	54	0.1
2462	Legacy CCK, Single Tx Path	11	25	46.6	54	7.4
2462	Legacy CCK, Dual Tx Path	11	28	48.9	54	5.2
2462	Non HT-20, Single Tx Path	6	24	49.8	54	4.2
2462	Non HT-20, Dual Tx Path	6	25	49.9	54	4.1
2462	Non HT-20 Beam Forming	6	23	50.2	54	3.8
2412/2432	Non HT-40 Duplicate, Single Tx Path	6	19	53.6	54	0.5
2412/2432	Non HT-40 Duplicate, Dual Tx Path	6	20	51.4	54	2.6
2412/2432	HT-40, Single Tx Path	m0	20	52.6	54	1.4
2412/2432	HT-40, Dual Tx Path	m0	22	51.0	54	3.0
2442/2462	Non HT-40 Duplicate, Single Tx Path	6	20	49.2	54	4.9
2442/2462	Non HT-40 Duplicate, Dual Tx Path	6	21	48.3	54	5.7
2442/2462	HT-40, Single Tx Path	m0	20	47.6	54	6.4
2442/2462	HT-40, Dual Tx Path	m0	21	47.8	54	6.2

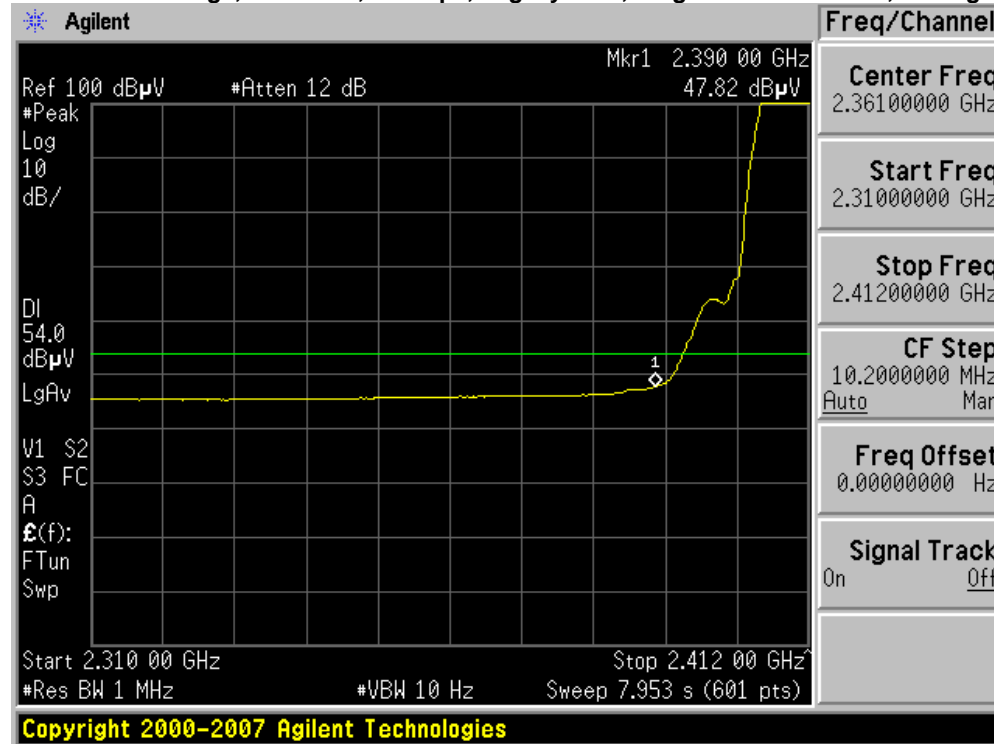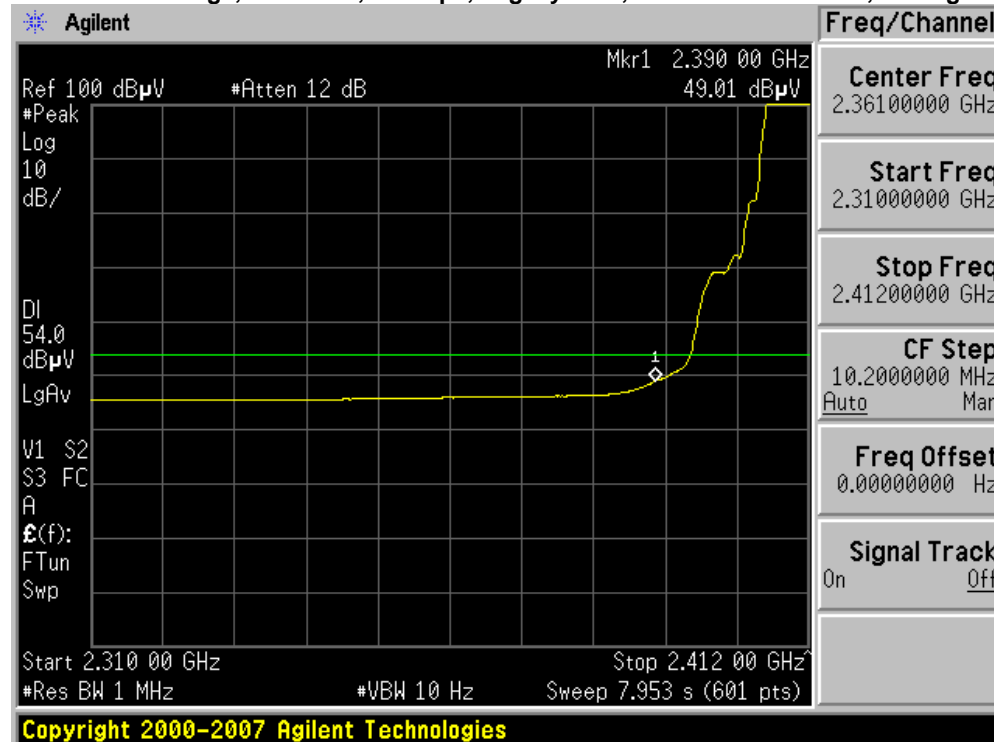Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average**Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average**


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths, Average

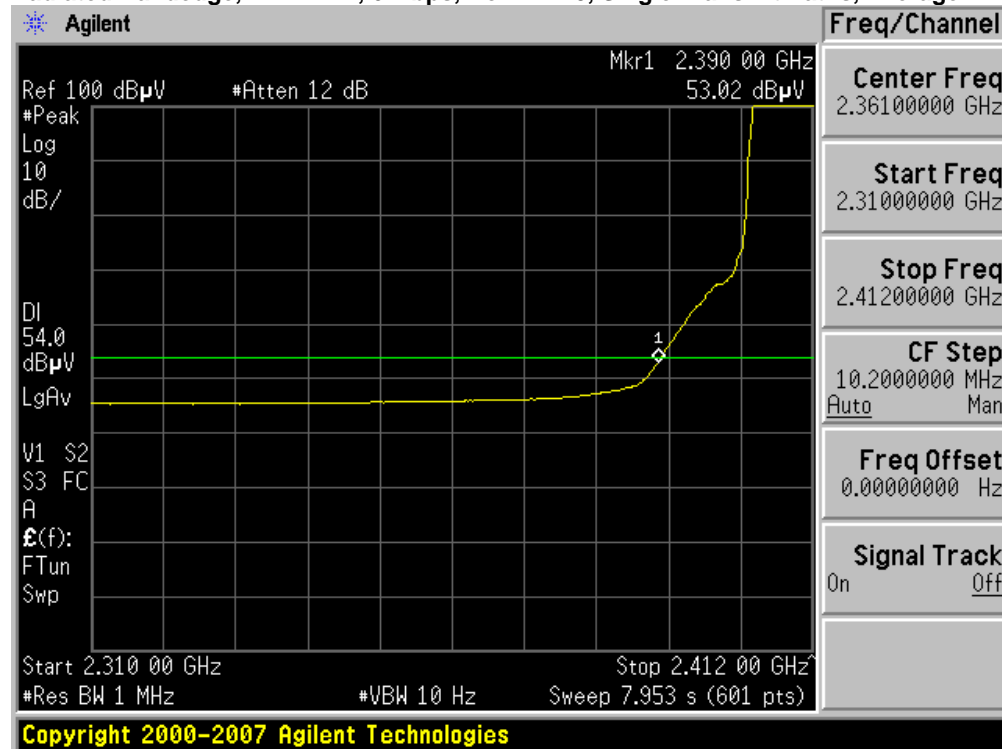


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths, Average

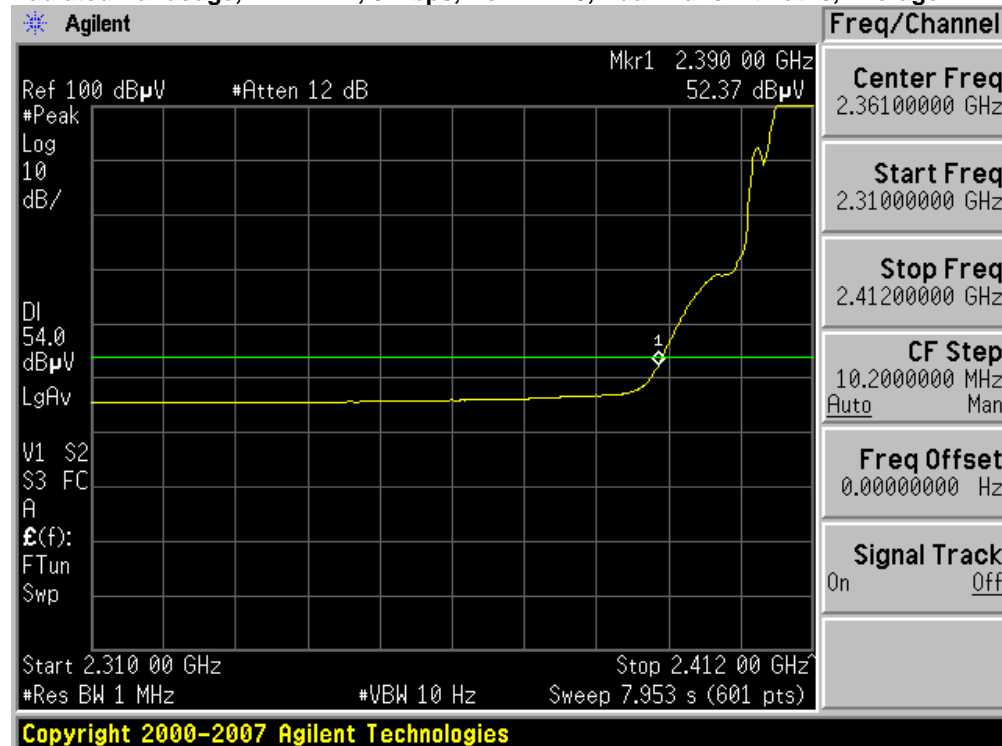


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average

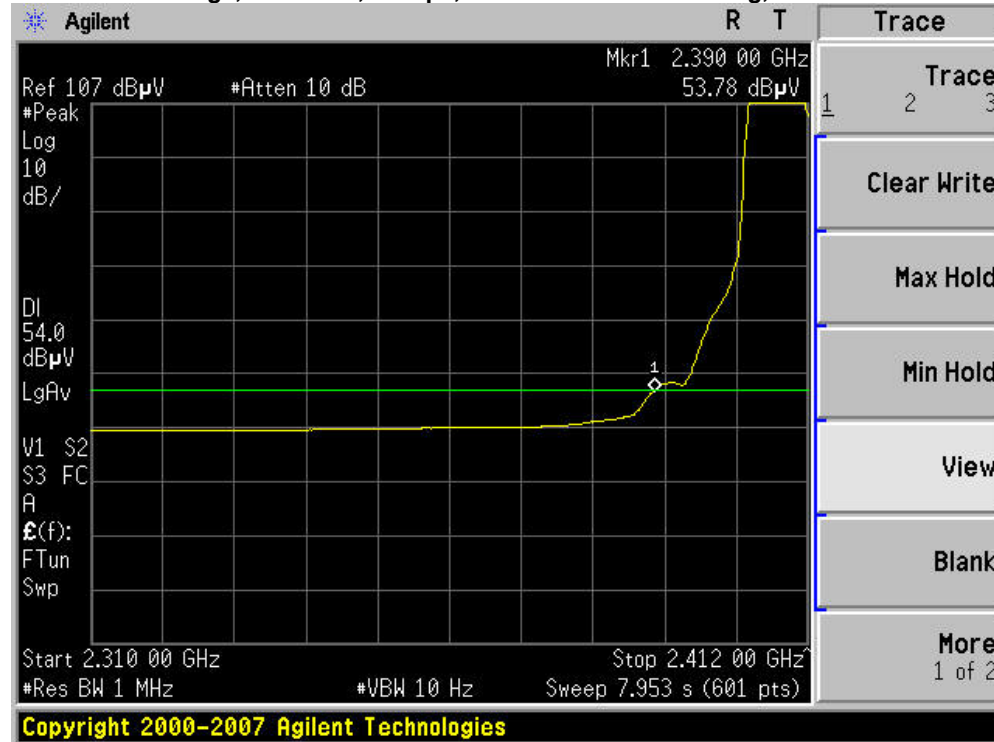


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Average

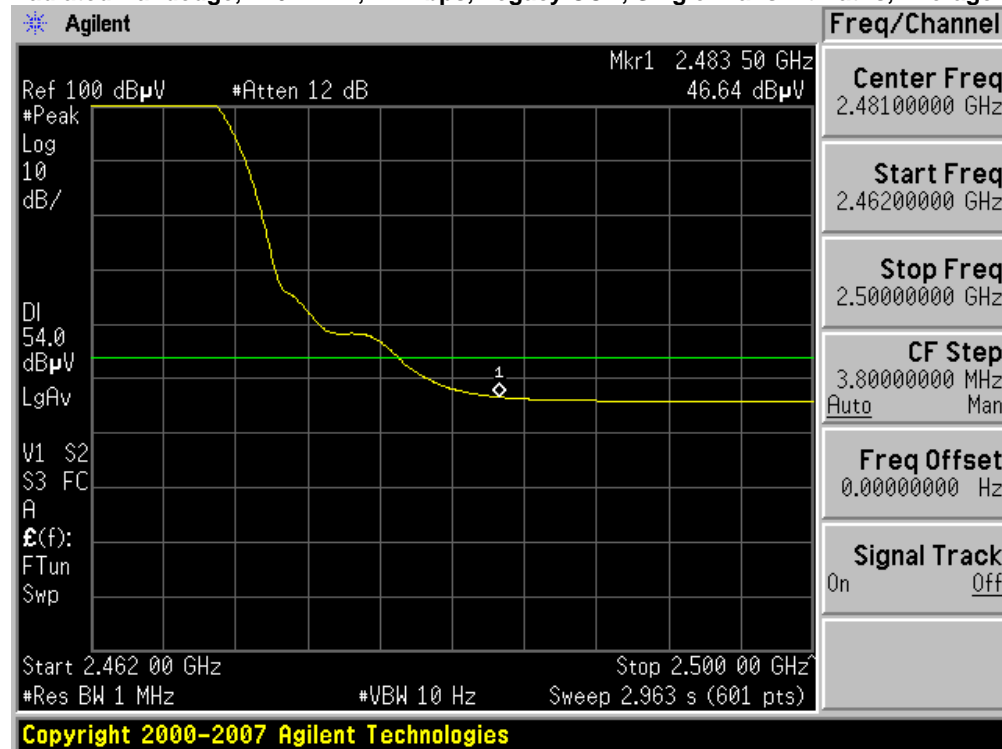


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average

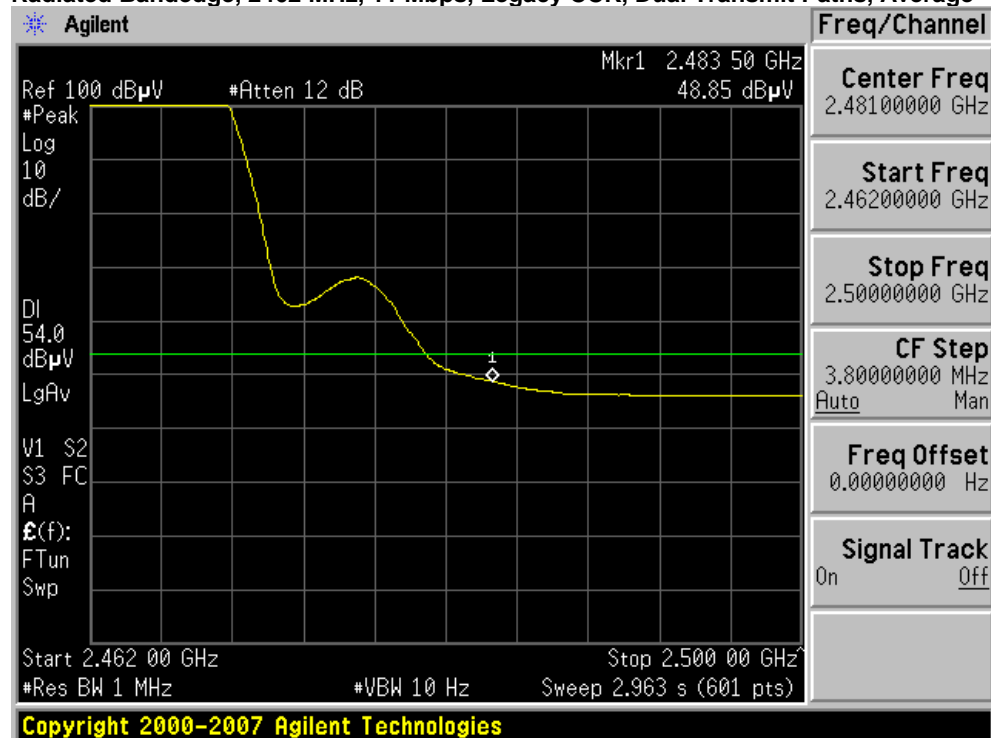

Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths, Average

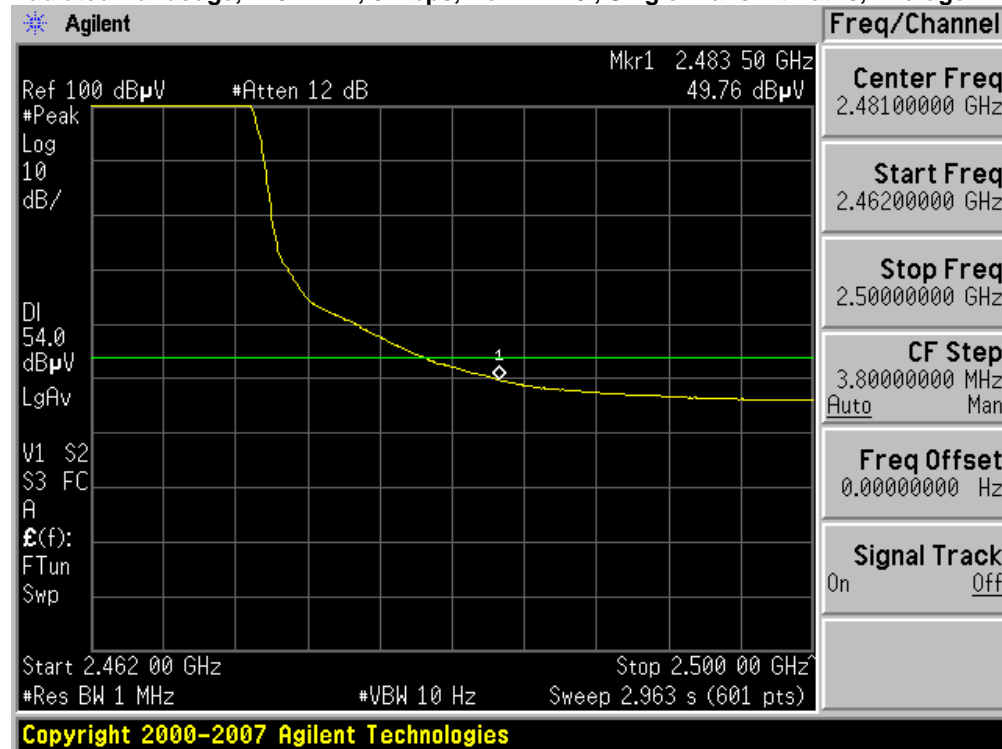


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths, Average

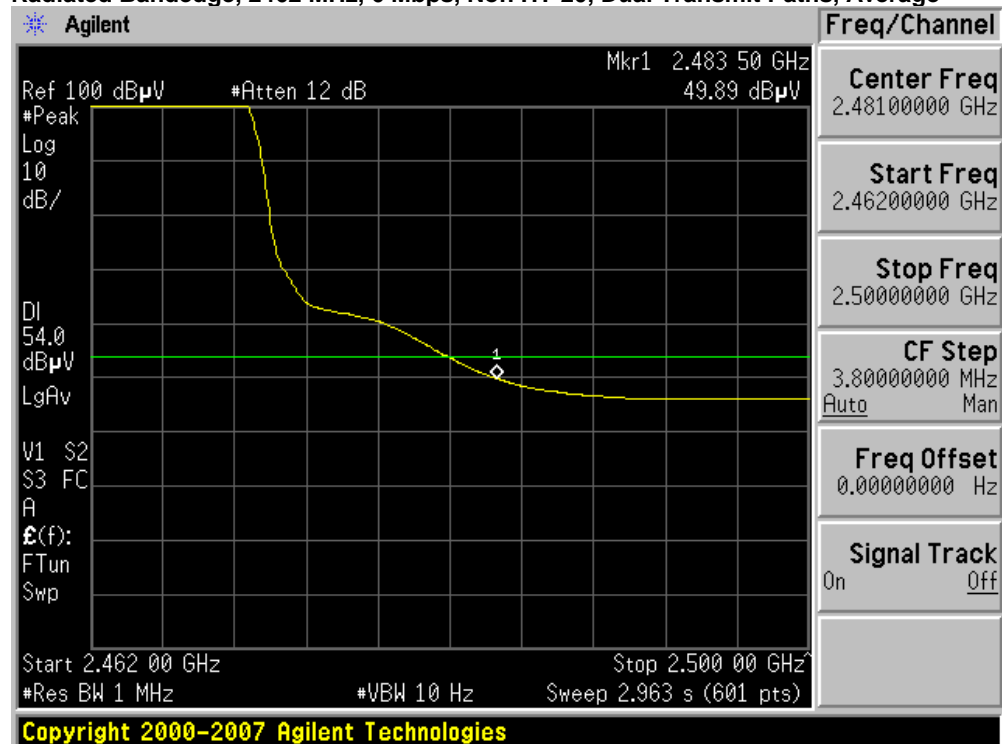





Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Average

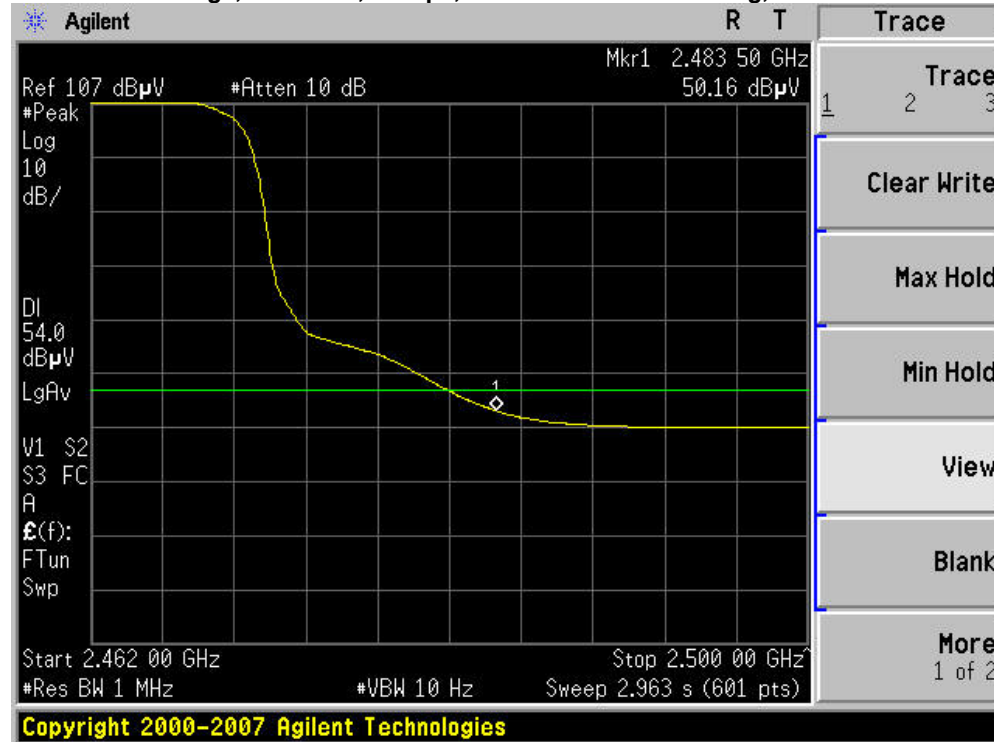


Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average

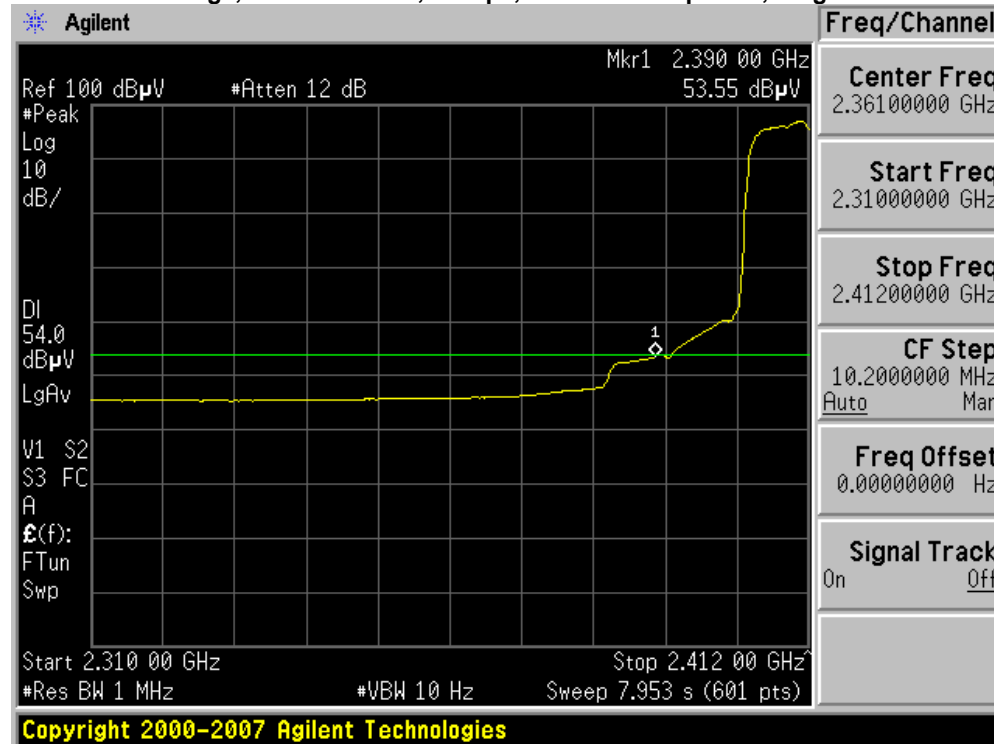


Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average

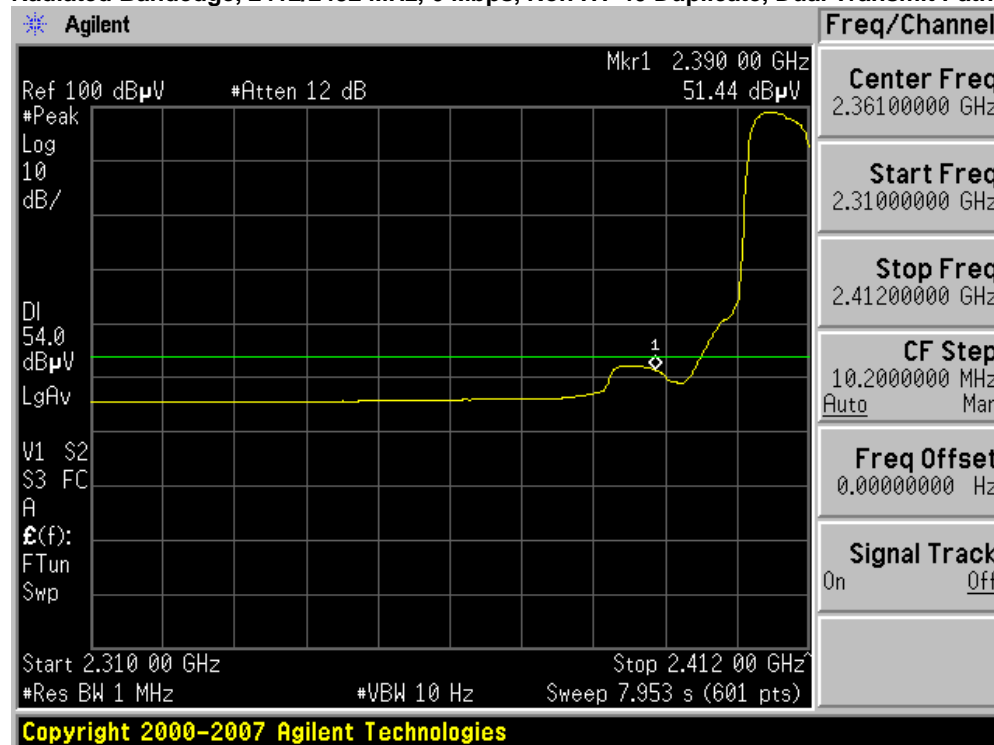


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Single Transmit Paths, Average

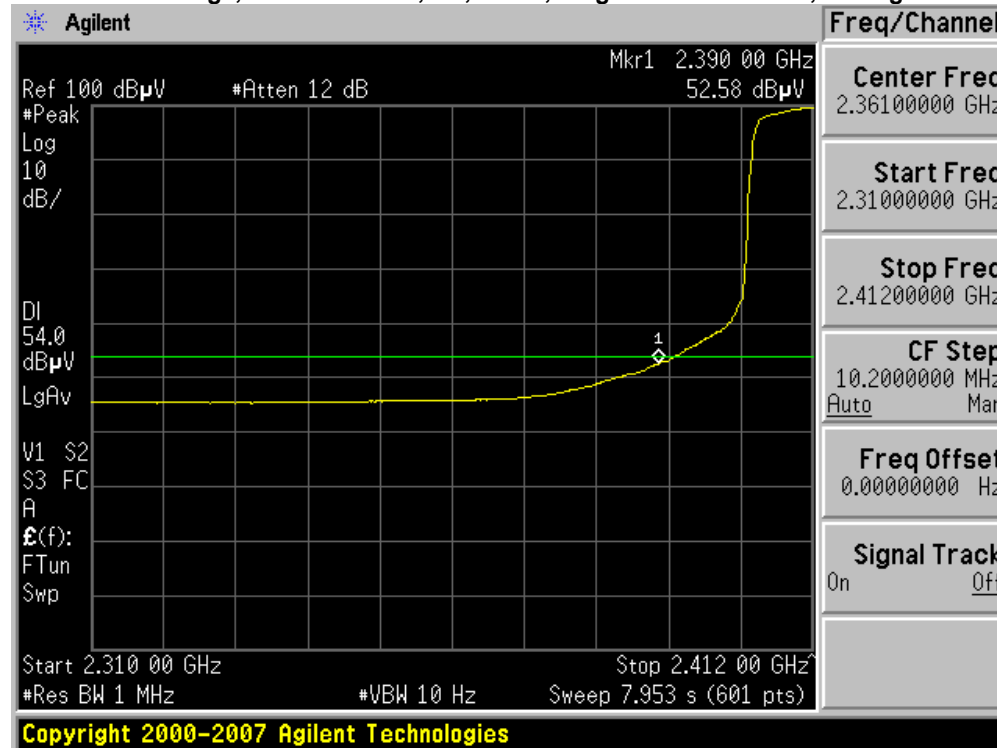


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Average

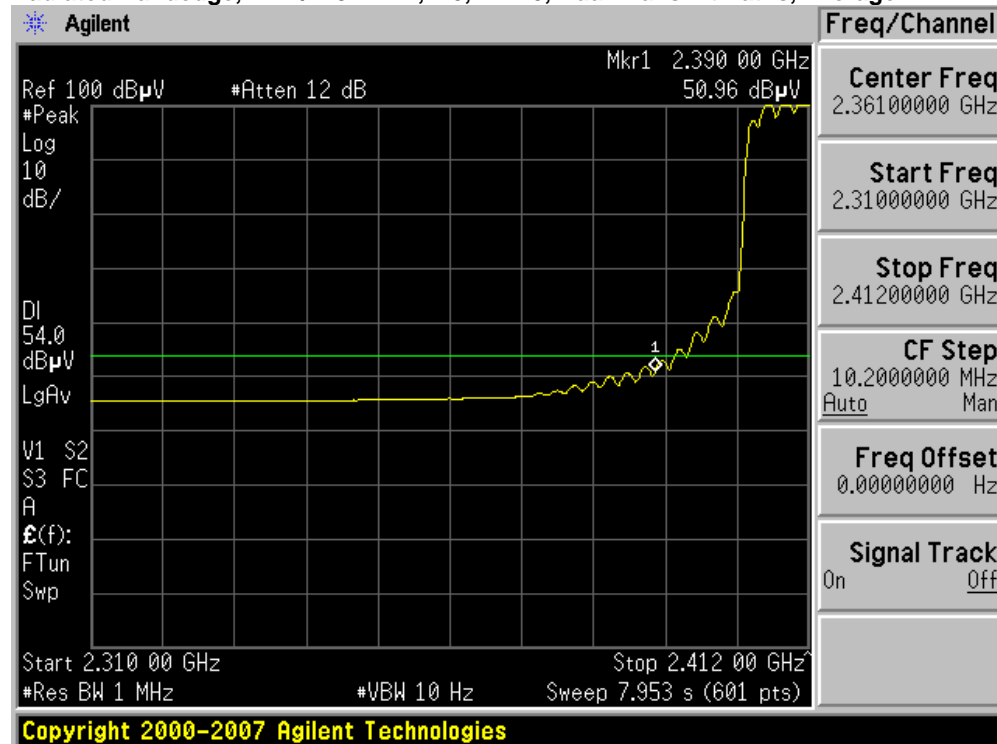


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Average

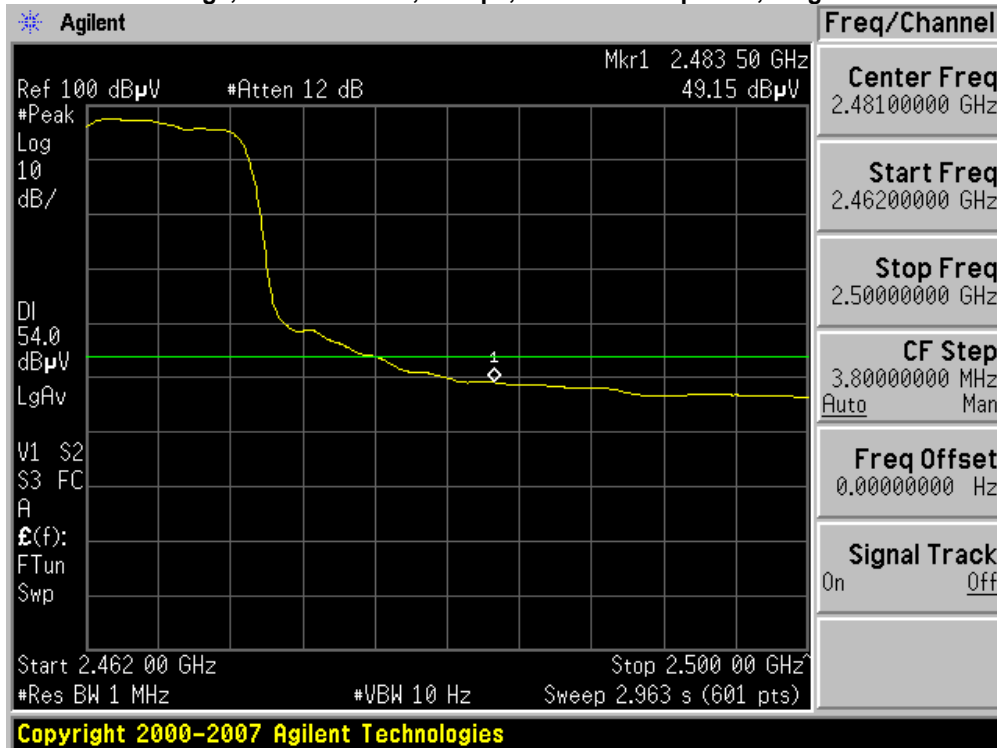

Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average

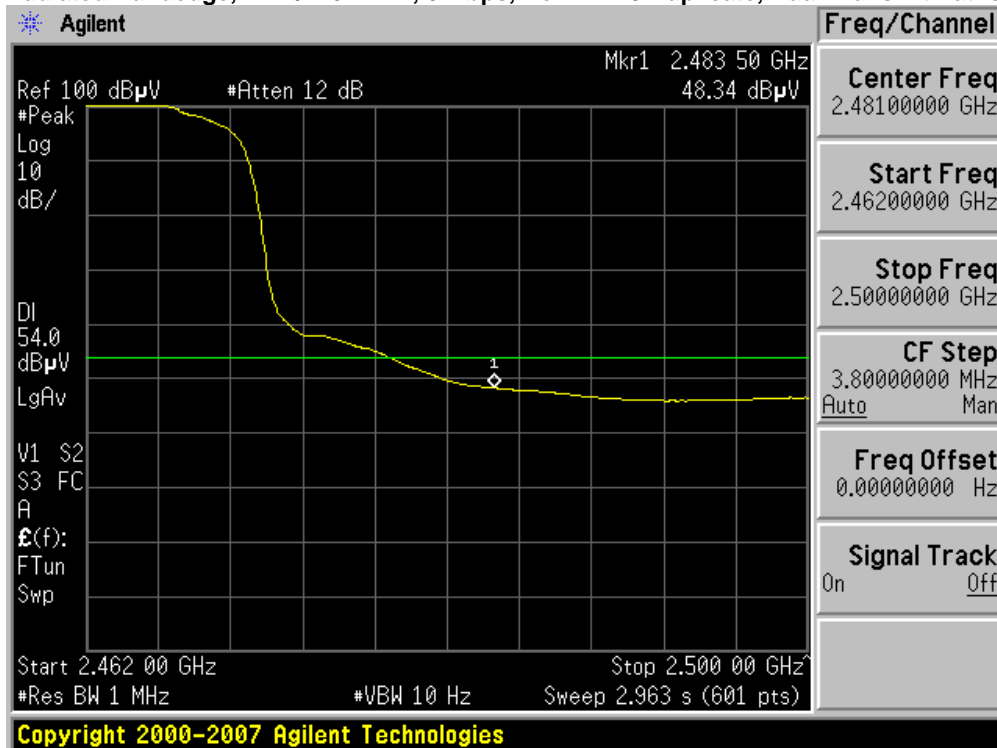


Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Single Transmit Paths, Average

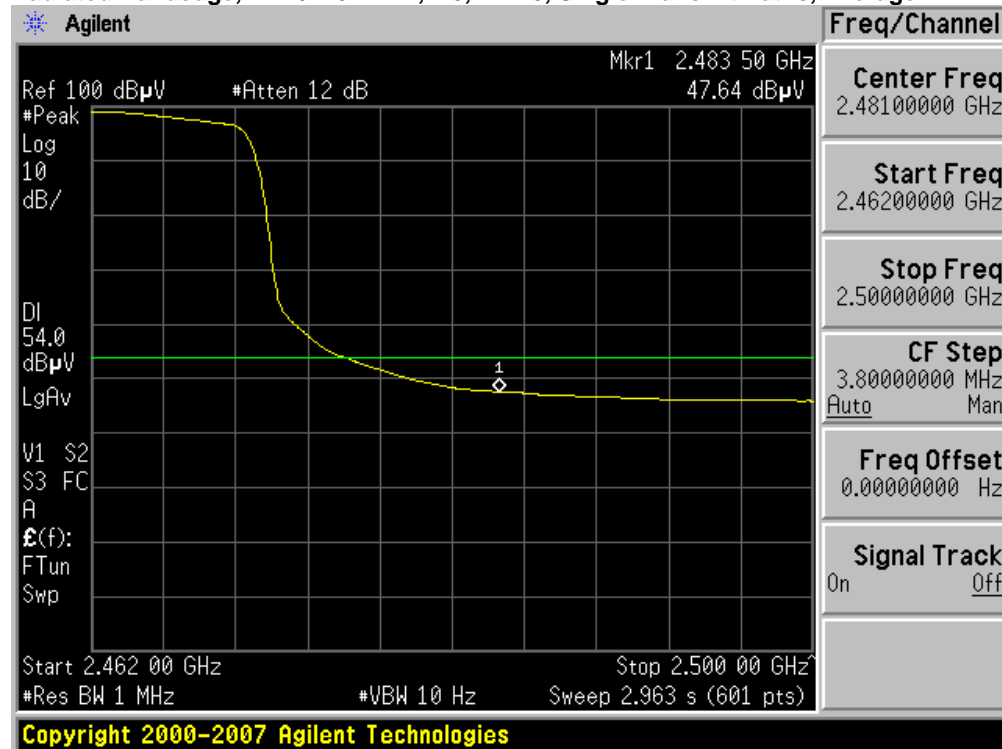


Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Average




Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak

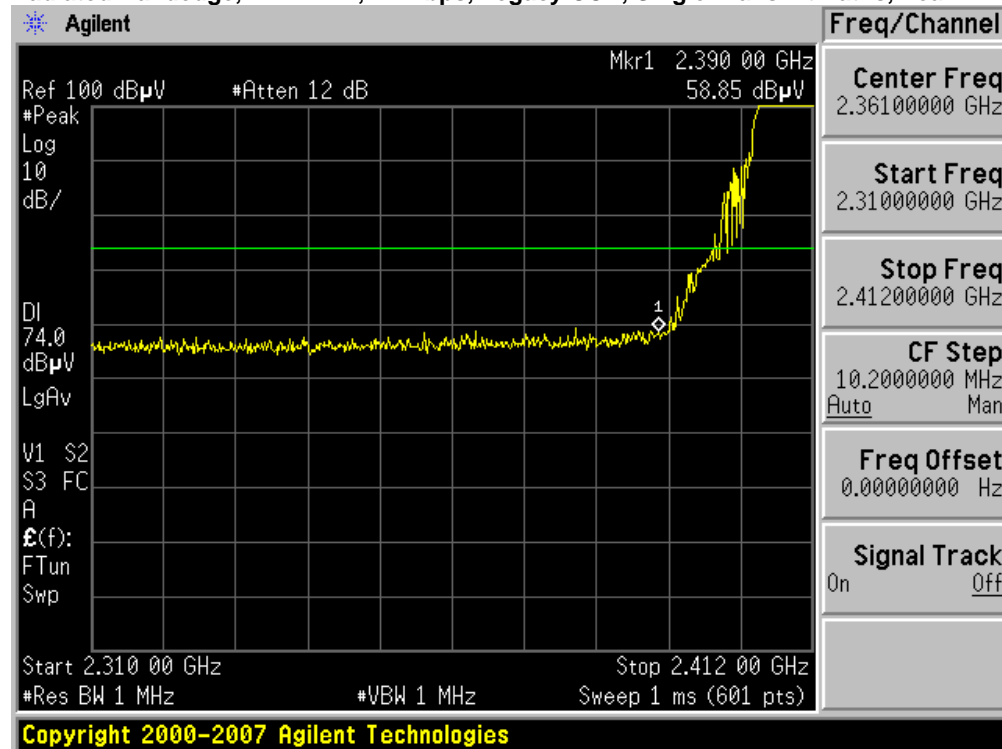


Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak

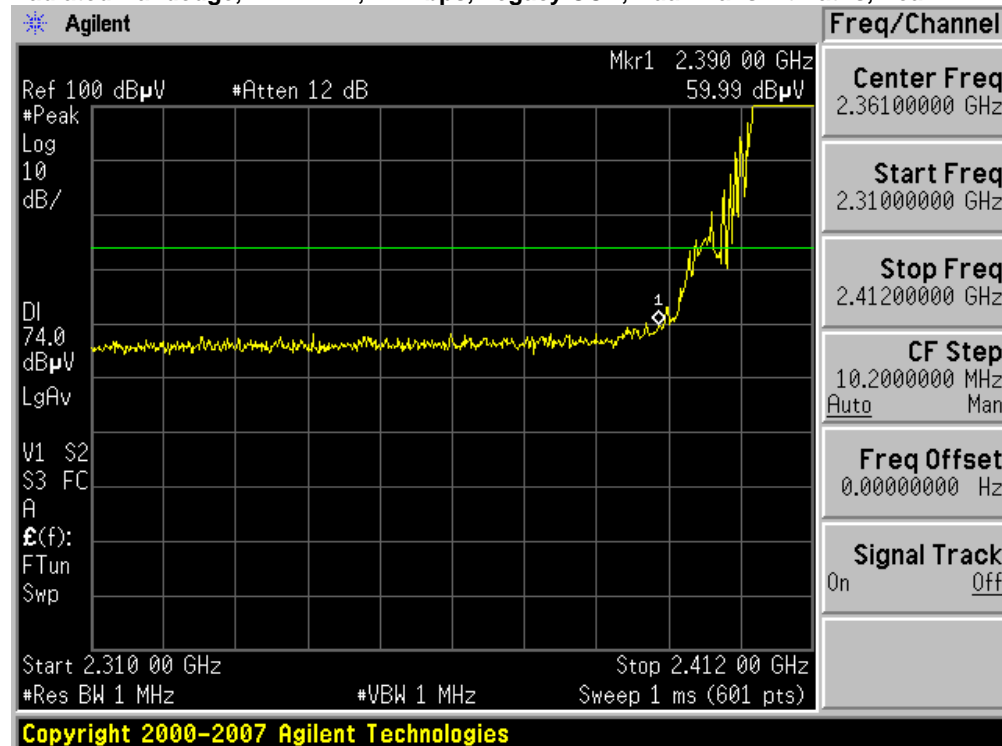


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths, Peak

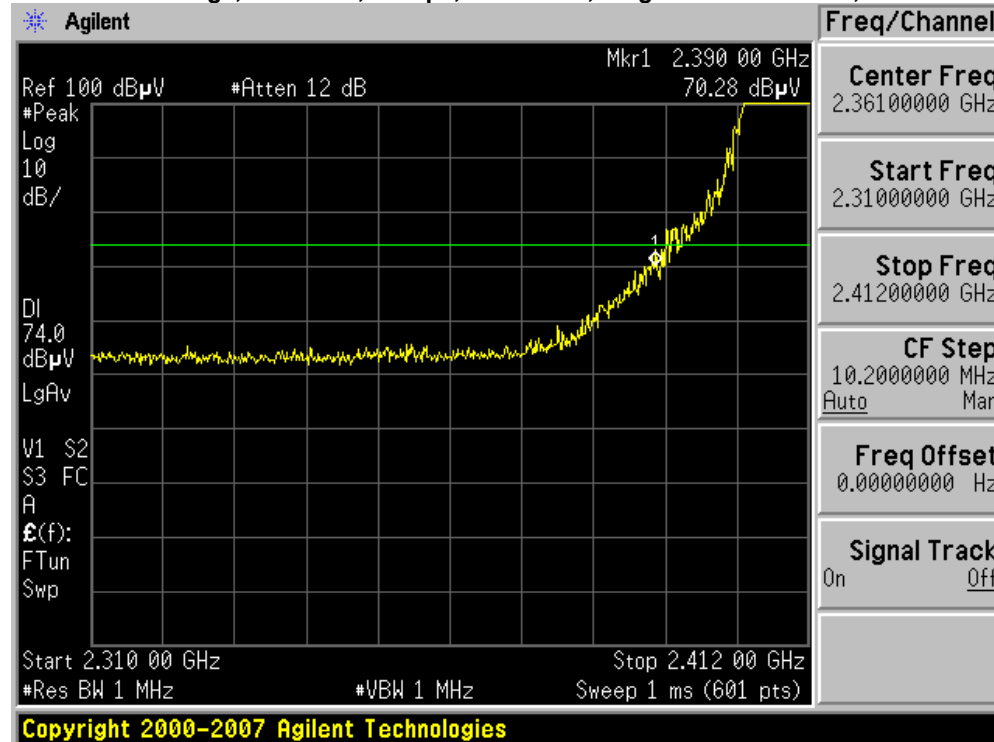


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths, Peak

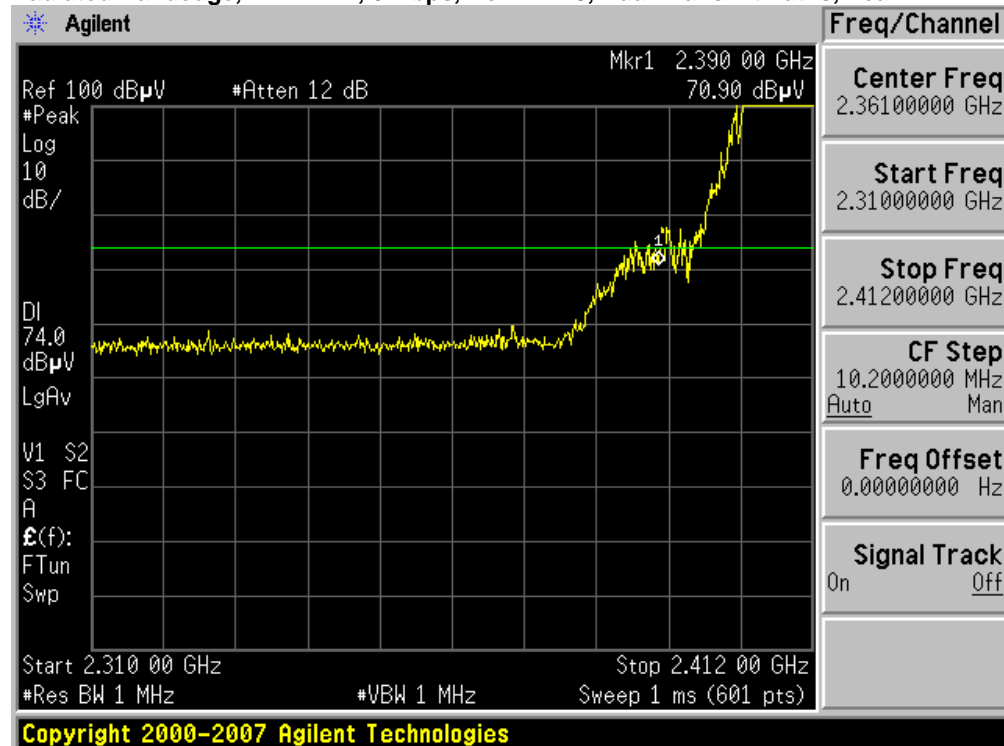


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak

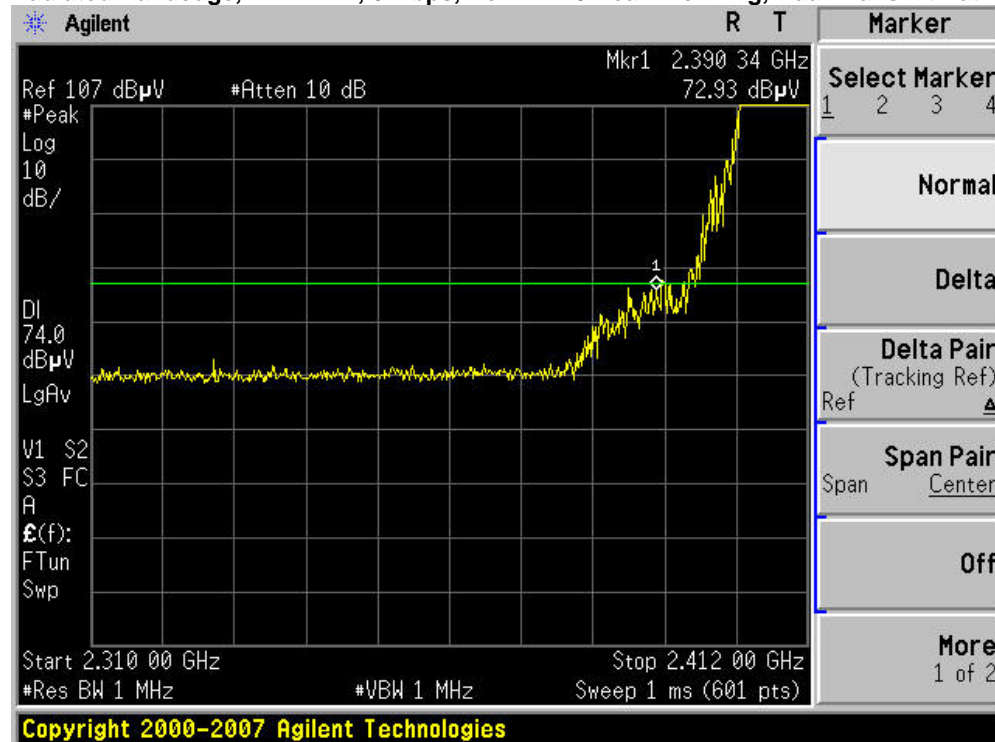


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Single Transmit Paths, Peak

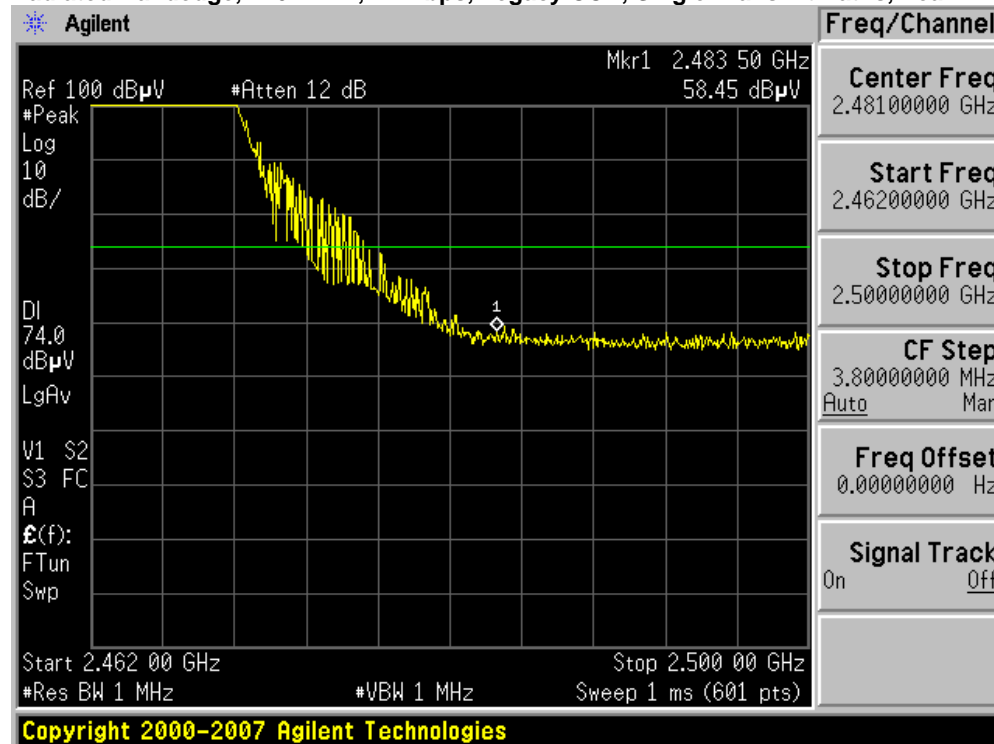


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak

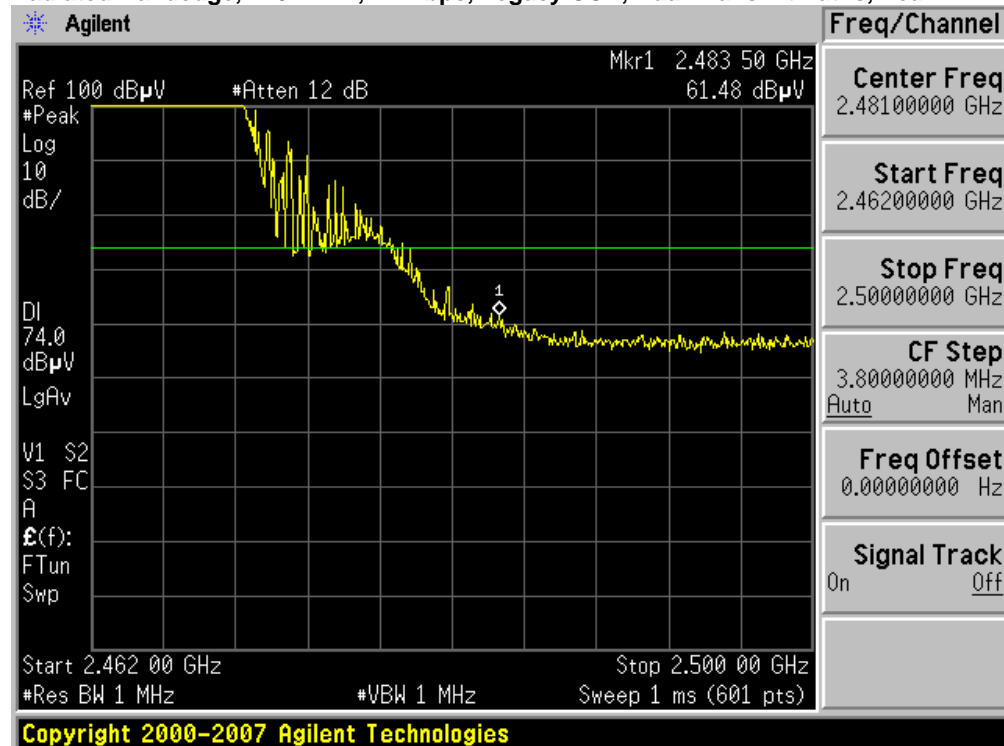


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths, Peak

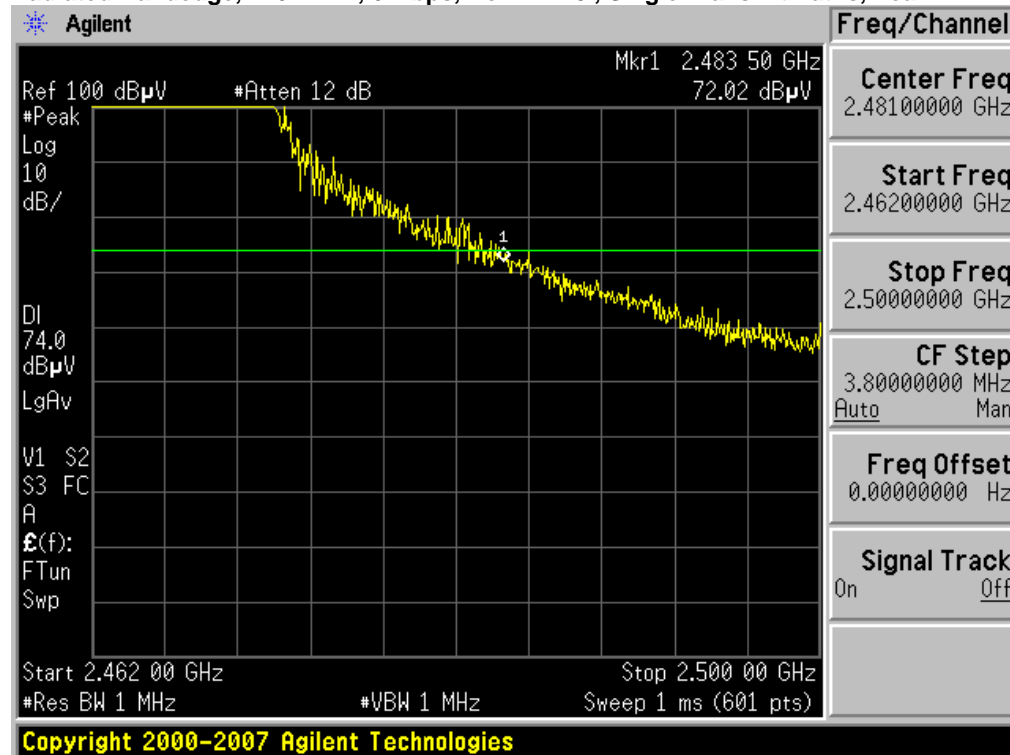


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20, Dual Transmit Paths, Peak

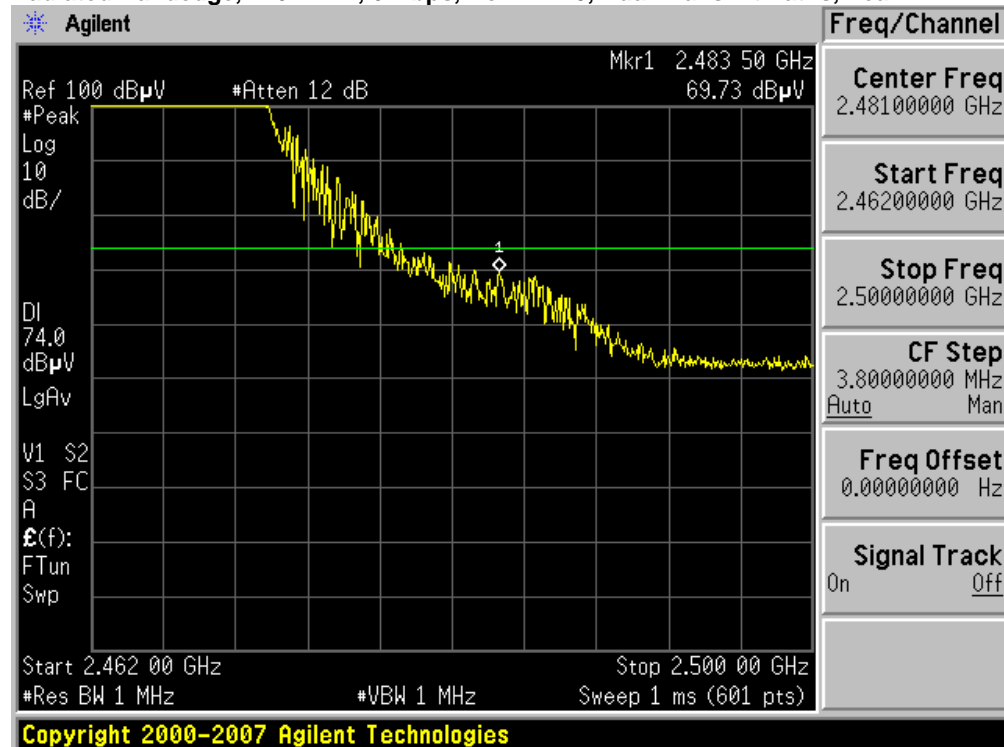


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Dual Transmit Paths, Peak

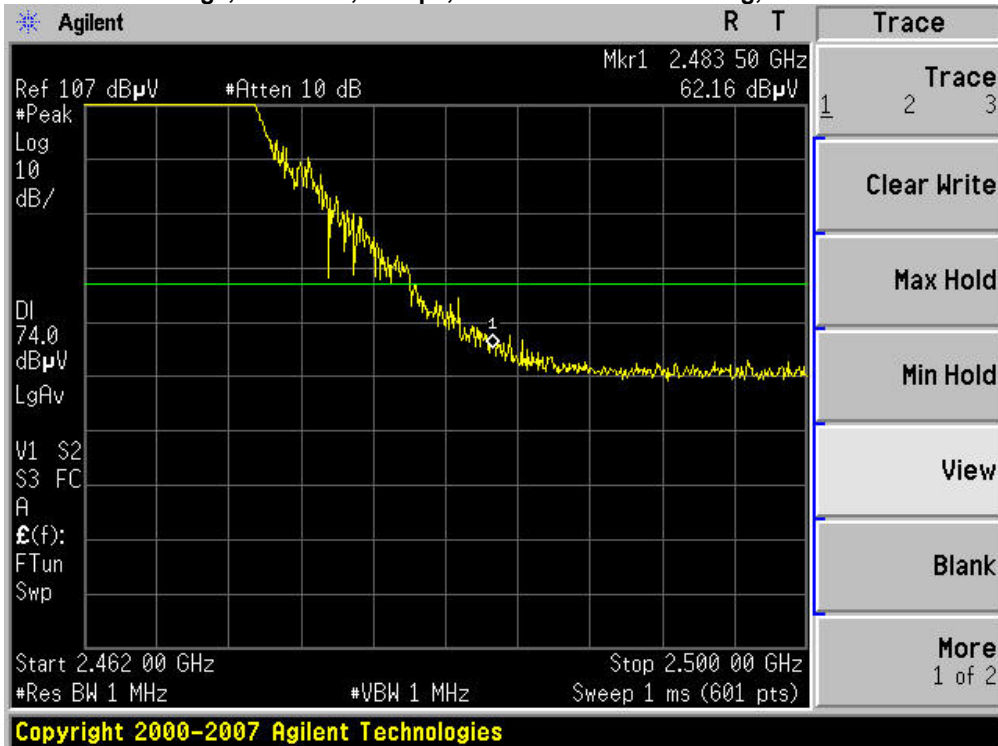


Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak

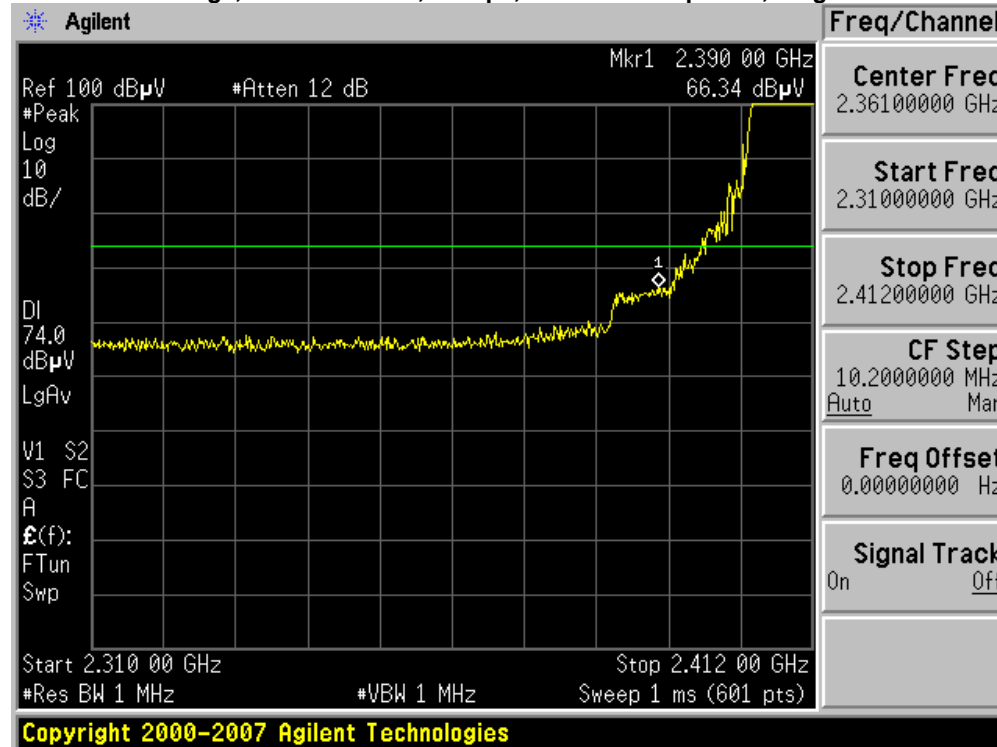


Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak

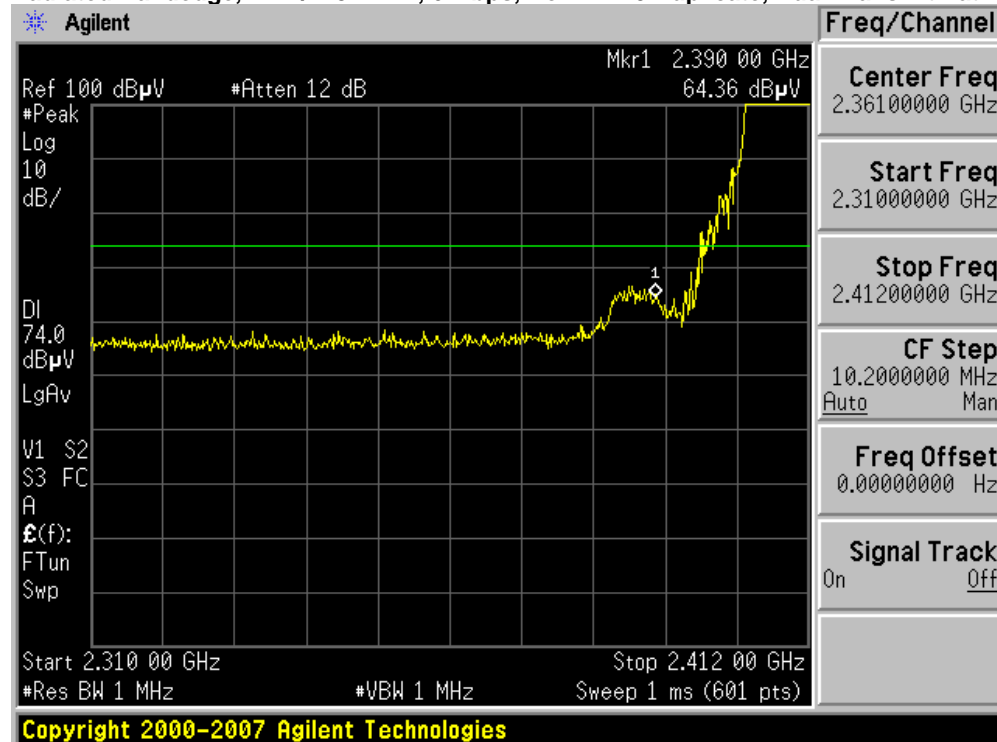


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Single Transmit Paths, Peak

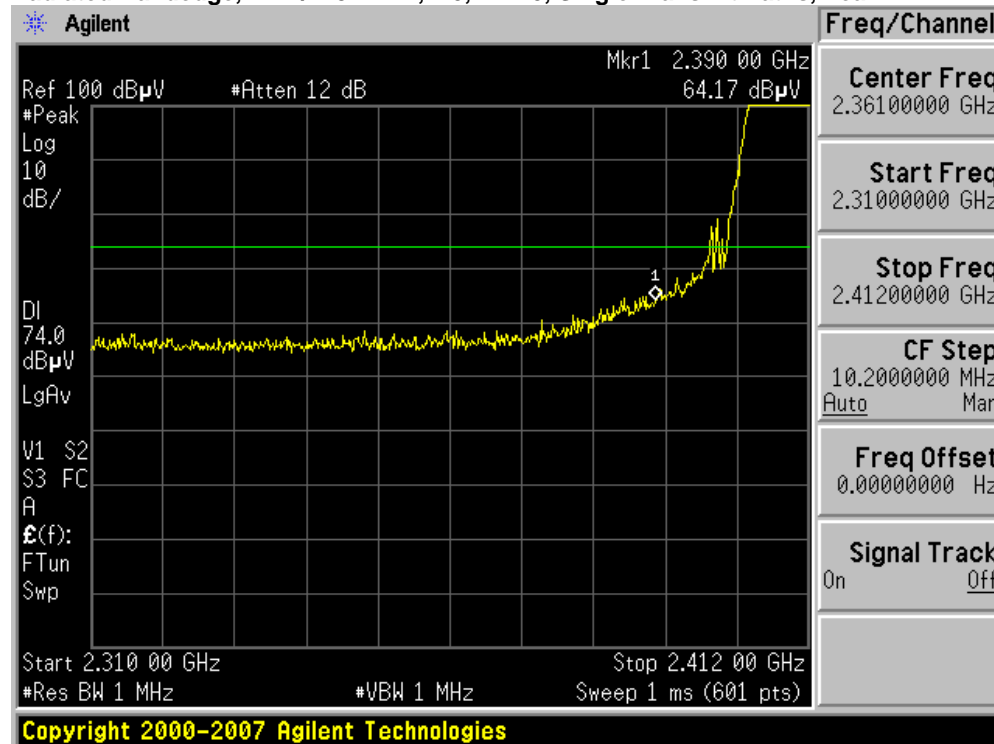


Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Peak

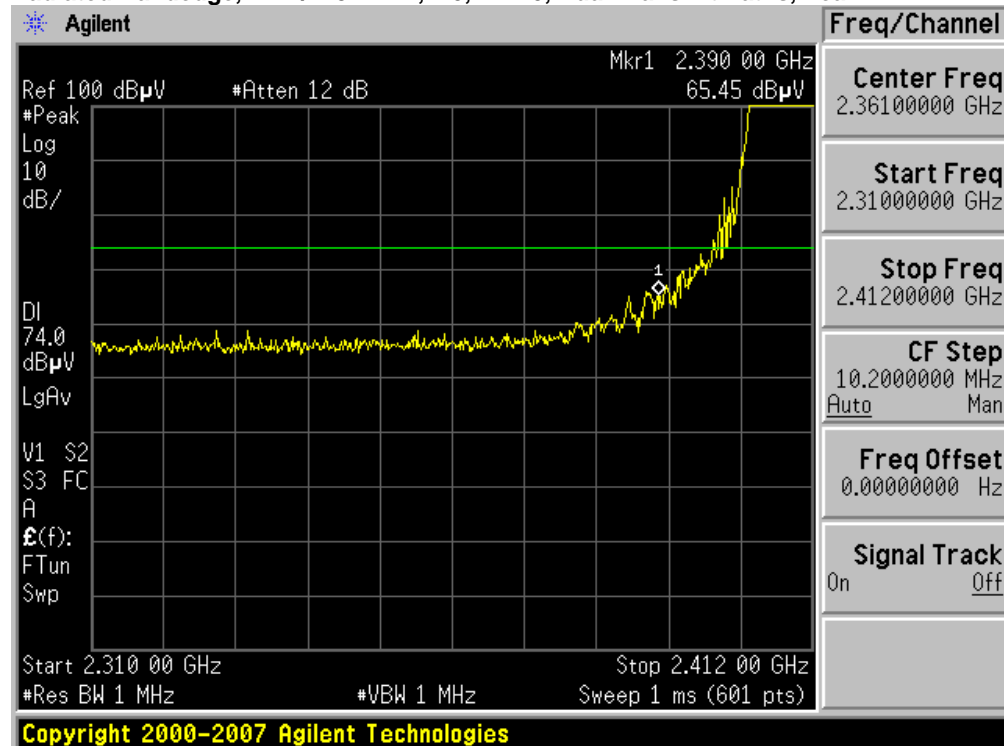


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Single Transmit Paths, Peak

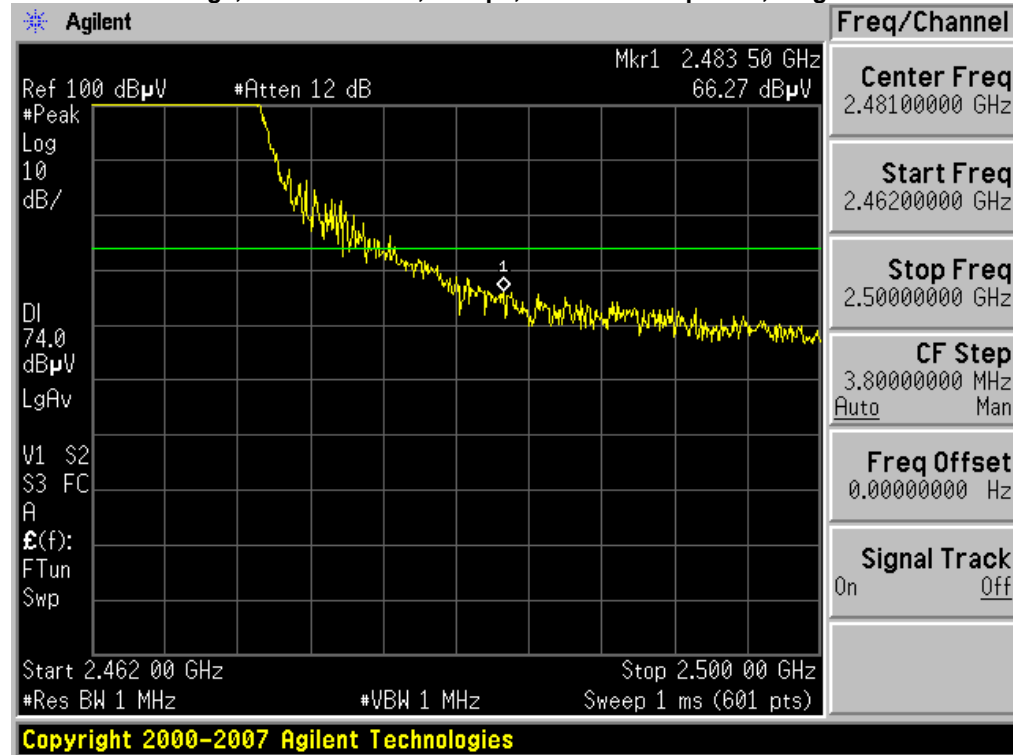


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak

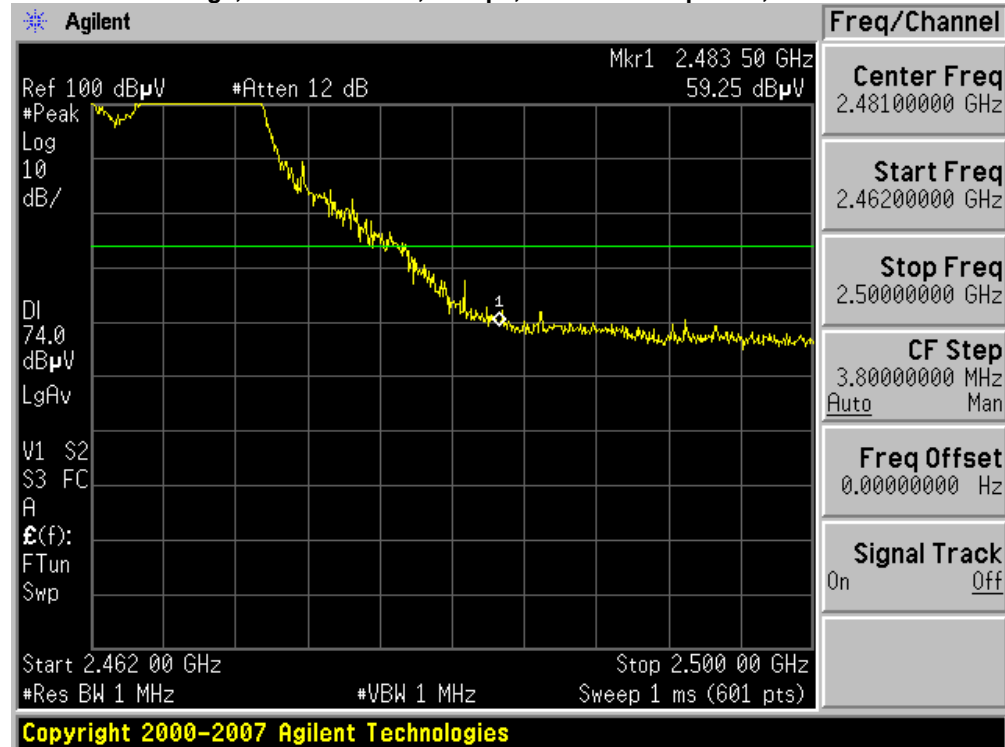

Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Single Transmit Paths, Peak

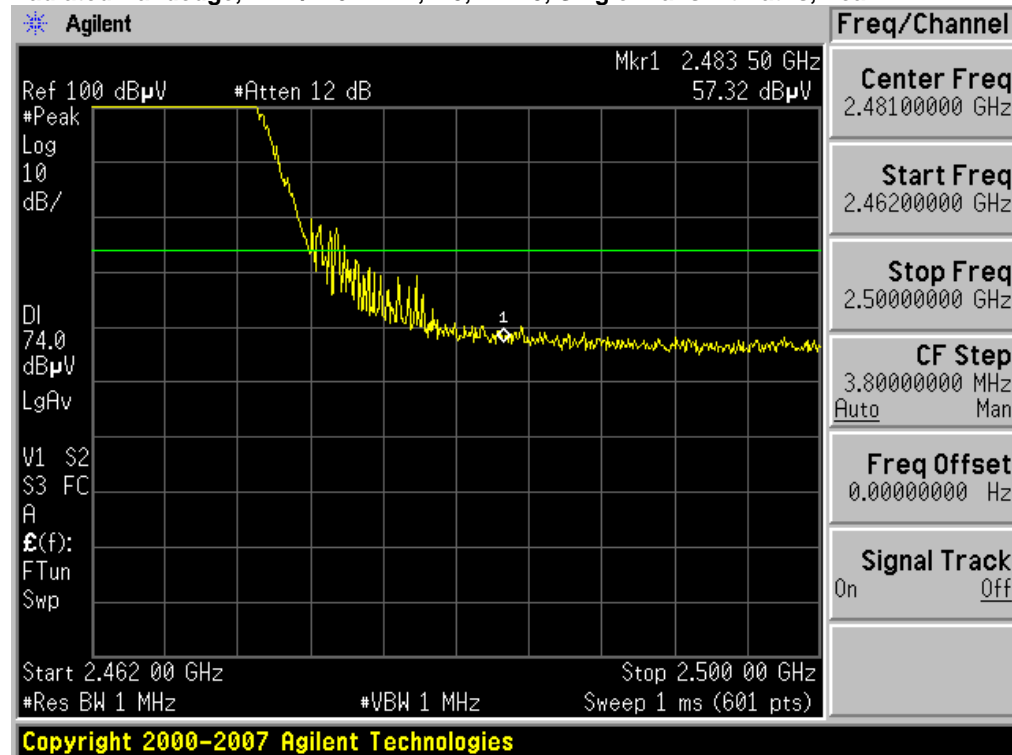

Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Peak

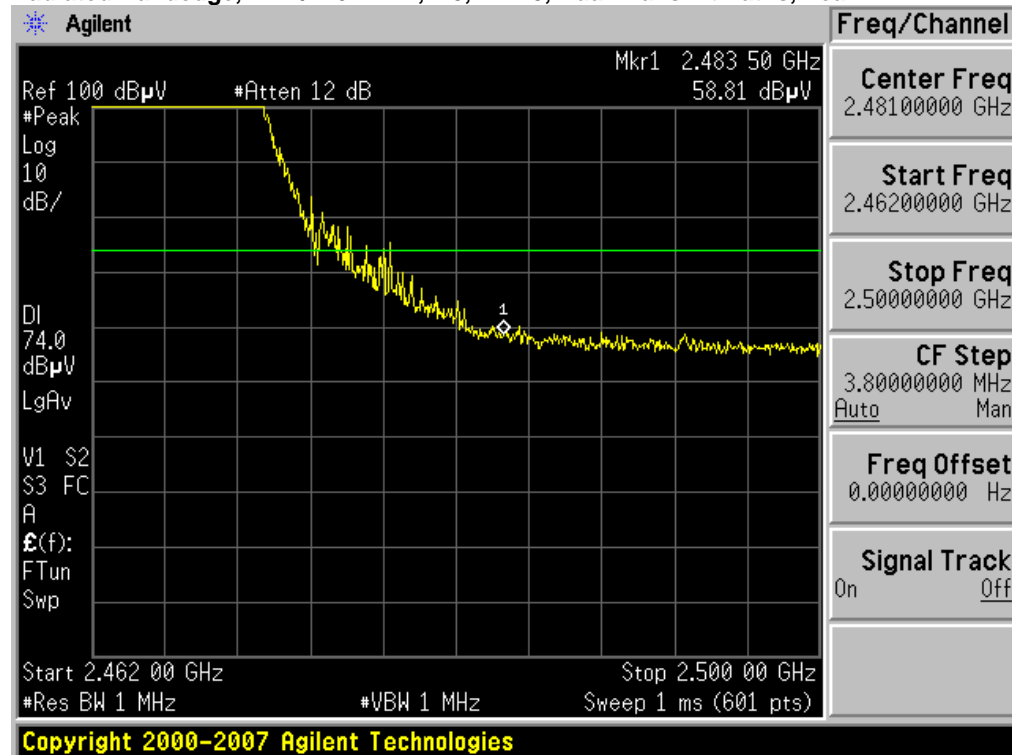



Radiated Spurious Emissions

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 1GHz – 18 GHz
 Reference Level: 80 dBuV
 Attenuation: 10 dB
 Sweep Time: Coupled
 Resolution Bandwidth: 1MHz
 Video Bandwidth: 1 MHz for peak, 10 Hz for average
 Detector: Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
 Also measure any emissions in the restricted bands.

The following data reflects the worst-case emissions for all supported antennas.

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Non HT-20 Beam Forming	6	42.6	54	11.5
2437	Legacy CCK, Dual Tx Path	11	41.3	54	12.7
2437	Non HT-20, Beam Forming	6	41.0	54	13.0
2462	Legacy CCK, Dual Tx Path	11	51.2	54	2.8
2462	Non HT-20 Beam Forming	6	42.5	54	11.5
2412/2432	Non HT-40, Dual Tx Path	6	40.8	54	13.2
2427/2447	Non HT-40, Dual Tx Path	6	40.7	54	13.4
2442/2462	Non HT-40, Dual Tx Path	6	40.7	54	13.3

Radiated Spurious Emissions, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Average




Radiated Spurious Emissions, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average



Radiated Spurious Emissions, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Average



Radiated Spurious Emissions, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Average

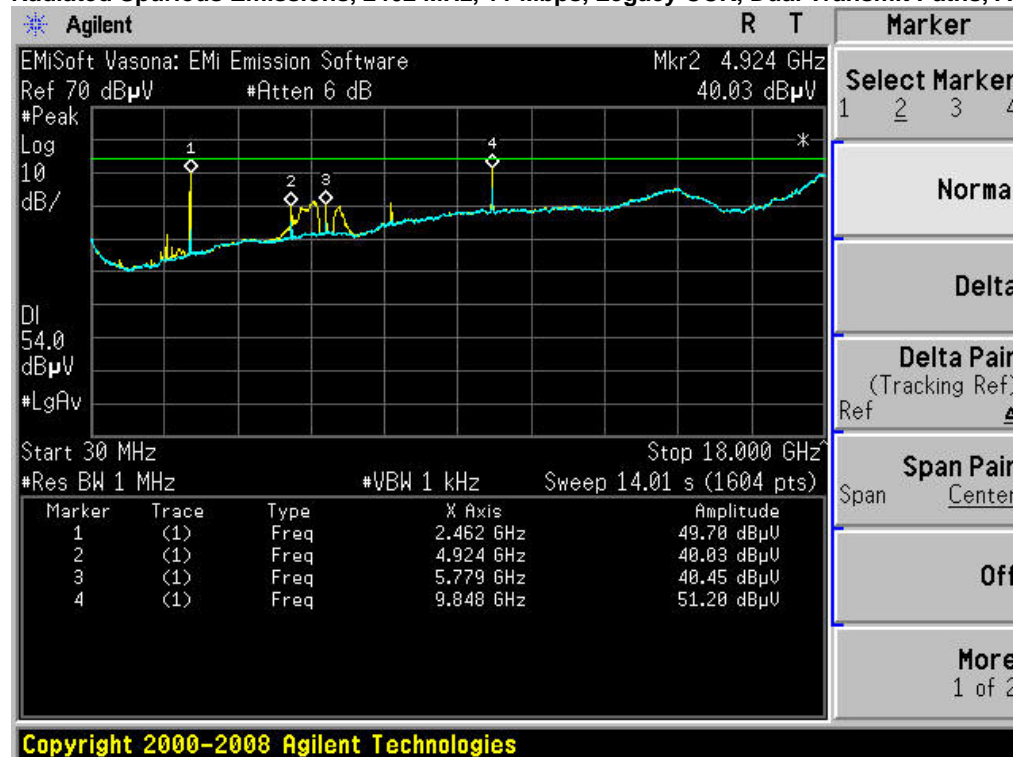



Radiated Spurious Emissions, 2462 MHz, 54 Mbps, Non HT-20 , Beam Forming, Average**Radiated Spurious Emissions, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average**

Radiated Spurious Emissions, 2427/2447 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average




Radiated Spurious Emissions, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Average

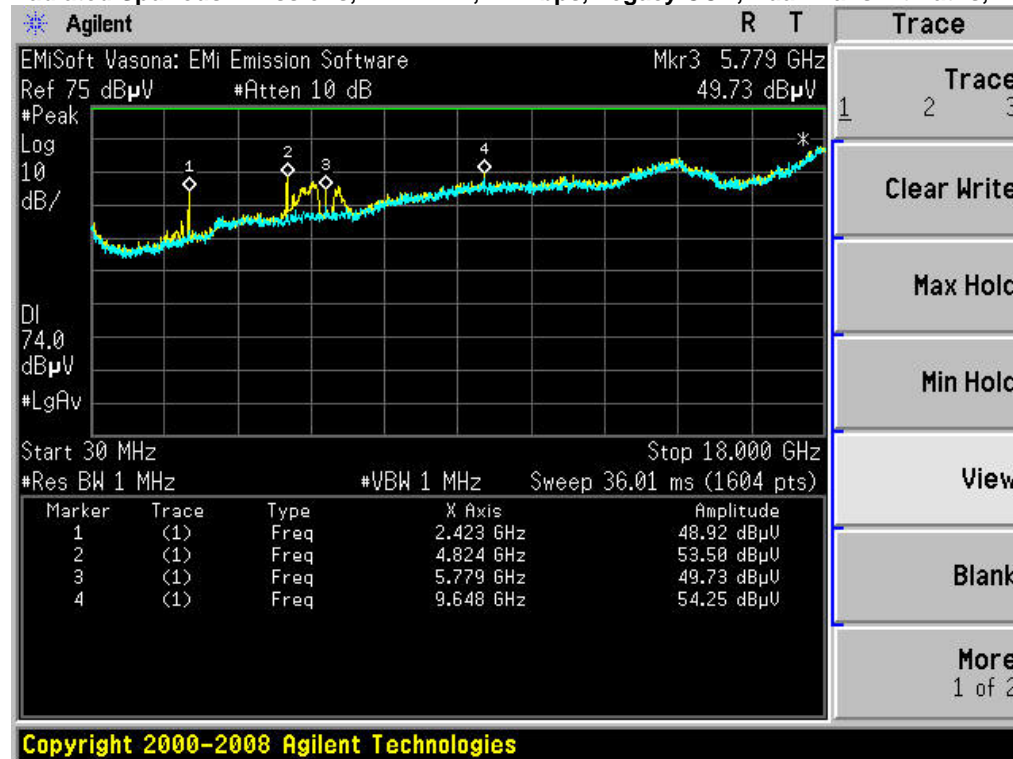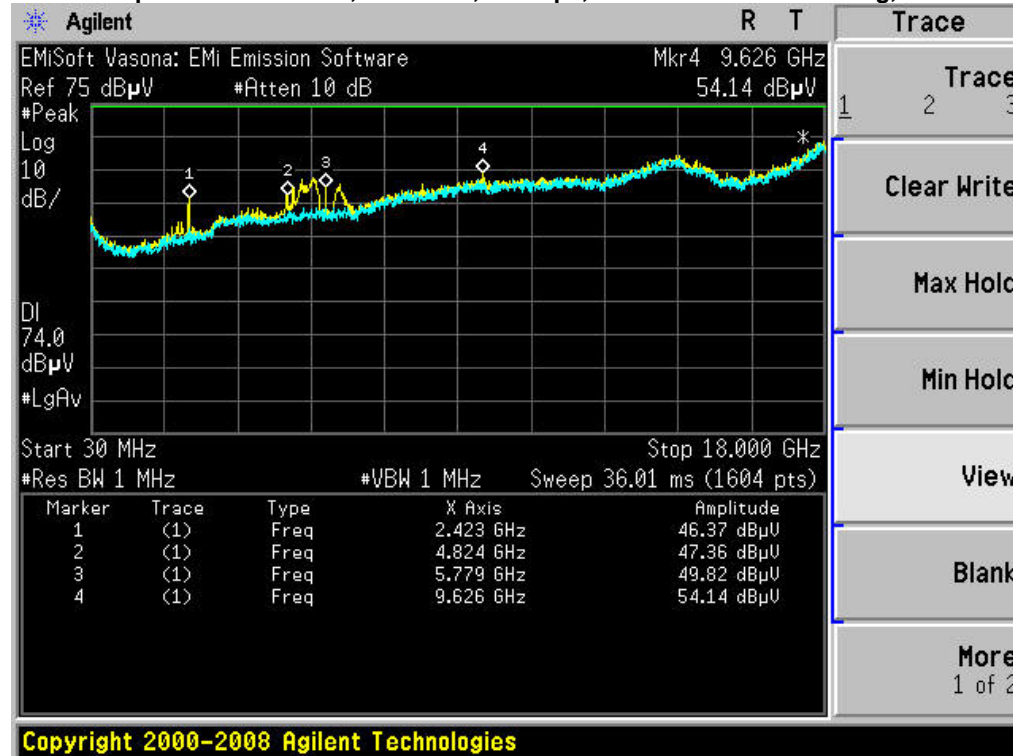


Radiated Spurious Emissions, 2412 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak**Radiated Spurious Emissions, 2412 MHz, 54 Mbps, Non HT-20 Beam Forming, Peak**


Radiated Spurious Emissions, 2437 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak

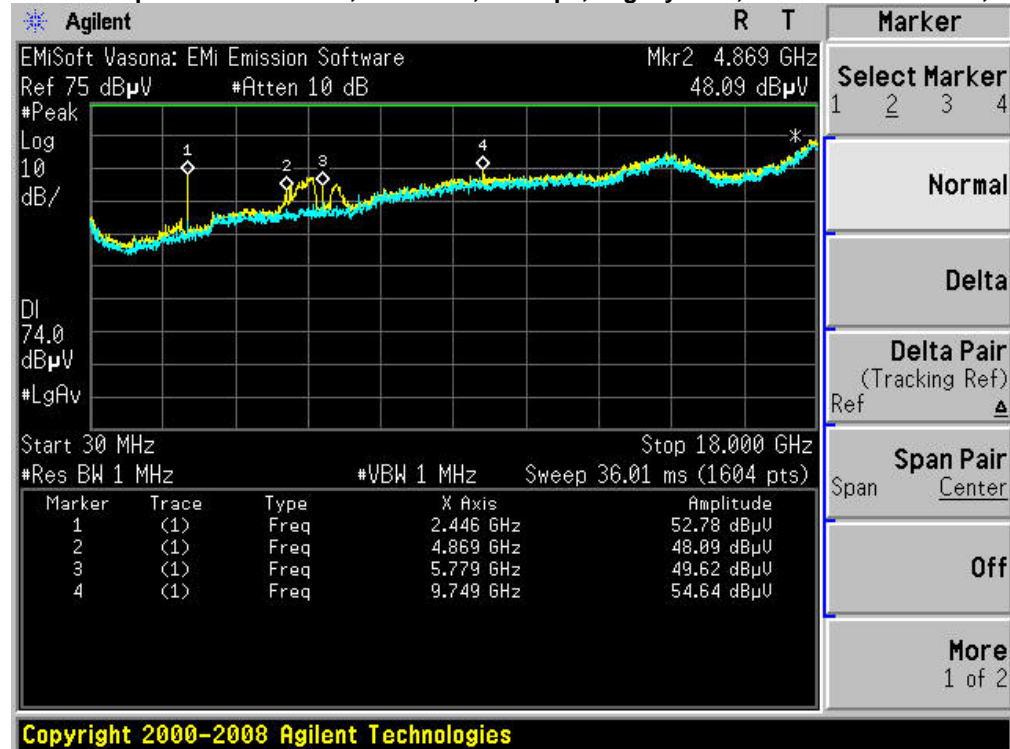


Radiated Spurious Emissions, 2437 MHz, 54 Mbps, Non HT-20 Beam Forming, Peak

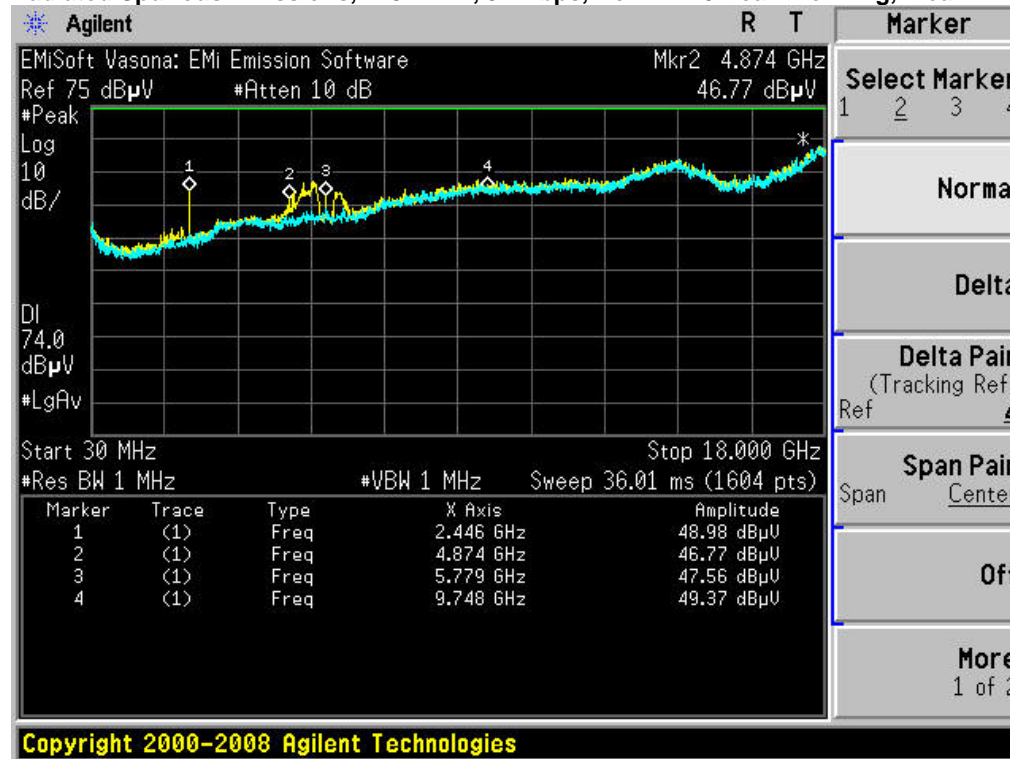


Radiated Spurious Emissions, 2462 MHz, 11 Mbps, Legacy CCK, Dual Transmit Paths, Peak

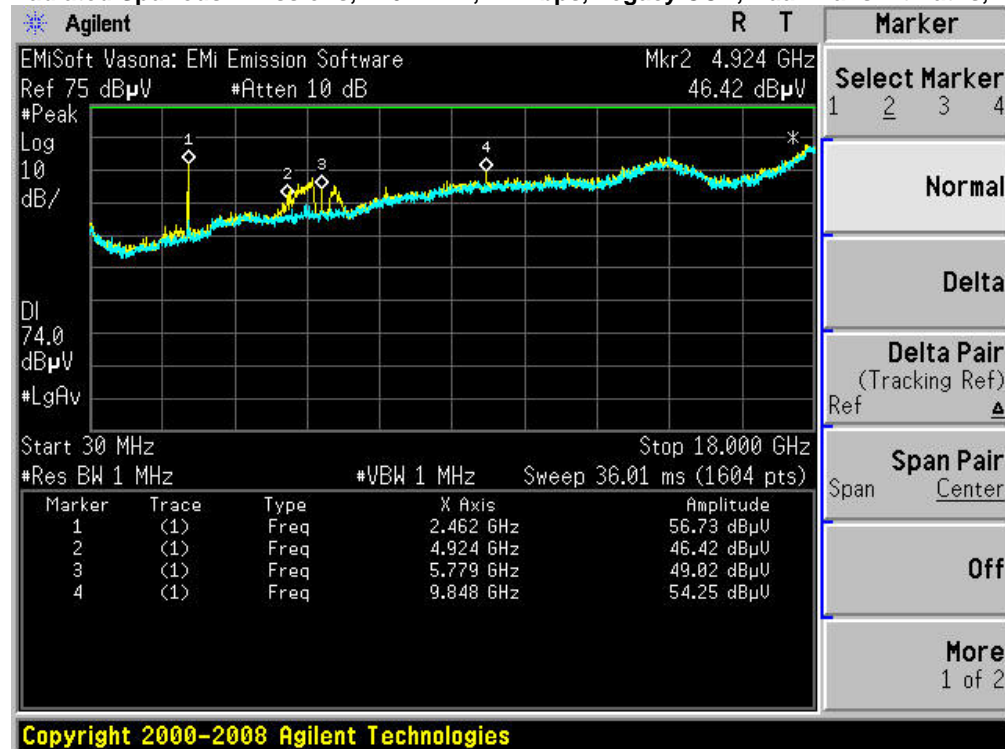


Radiated Spurious Emissions, 2462 MHz, 54 Mbps, Non HT-20, Beam Forming, Peak

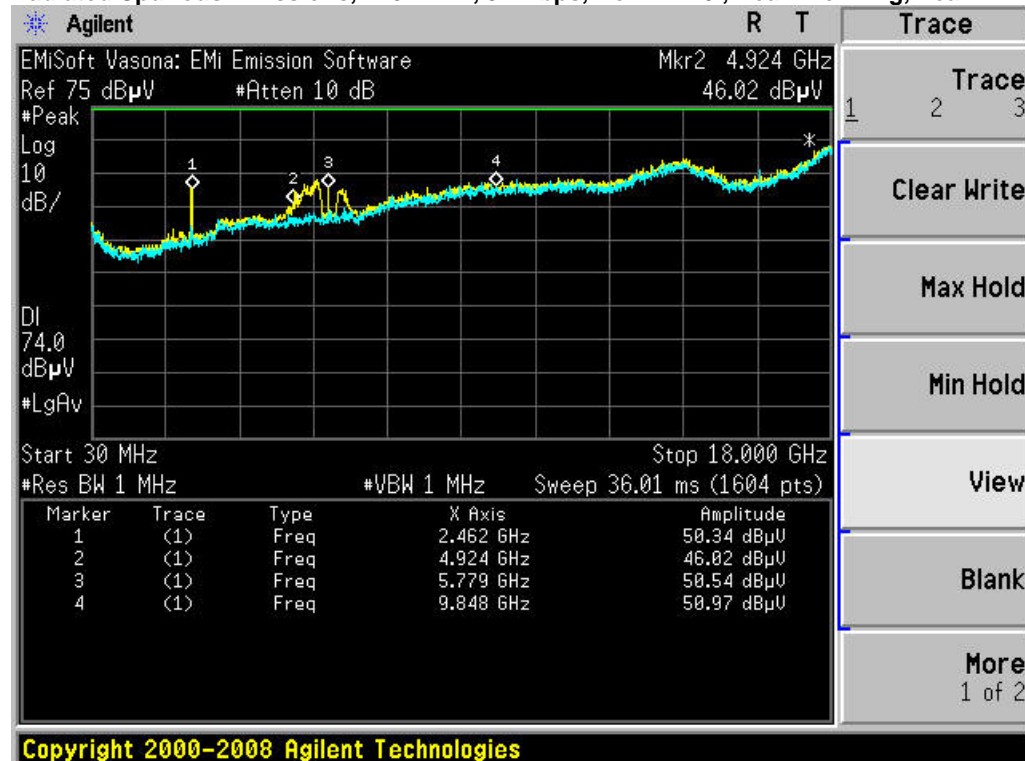

Radiated Spurious Emissions, 2412/2432 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak

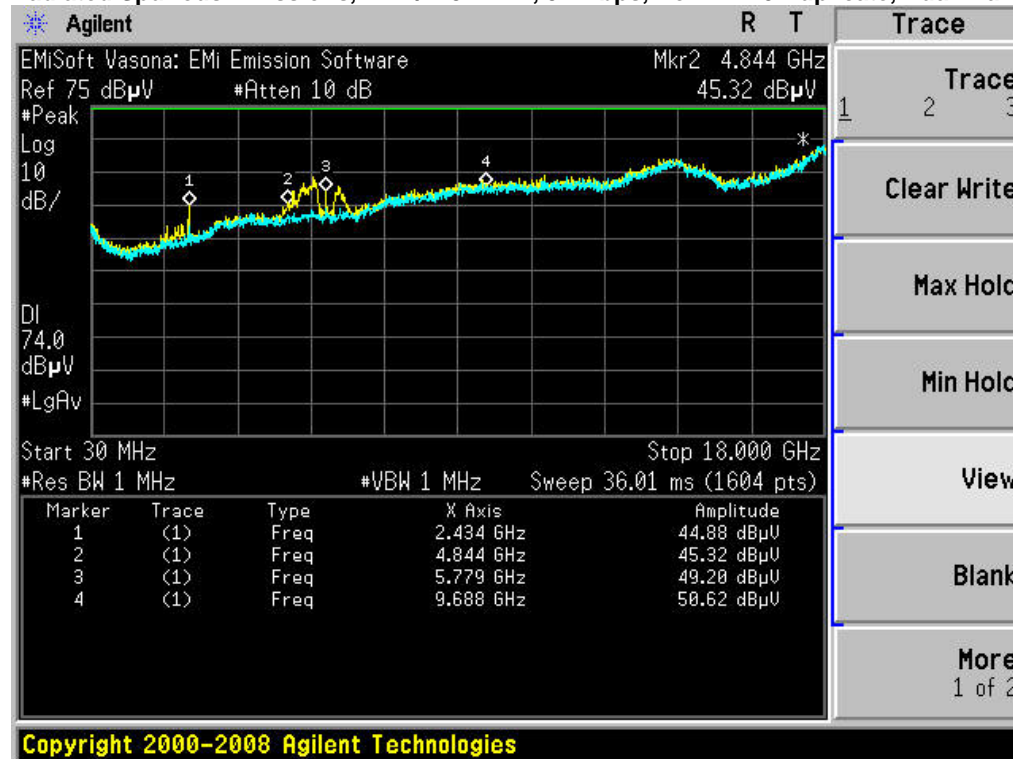


Radiated Spurious Emissions, 2442/2462 MHz, 54 Mbps, Non HT-40 Duplicate, Dual Transmit Paths, Peak

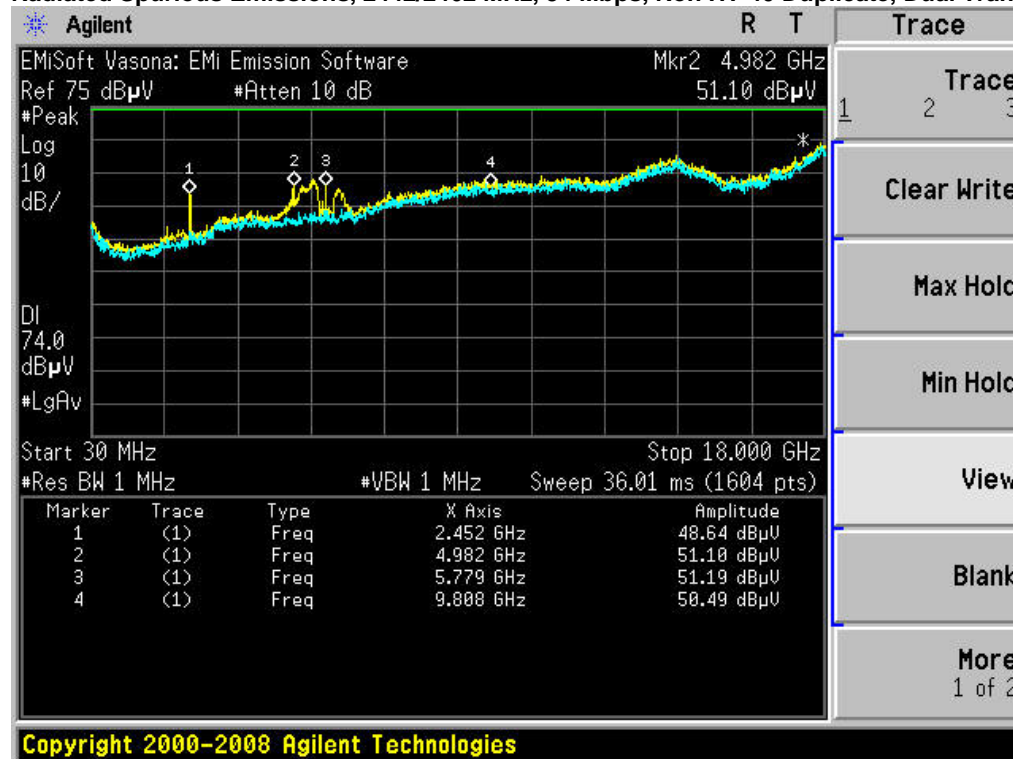


Radiated Spurious Receive Emission

Average Radiated Spurious Receive Emission

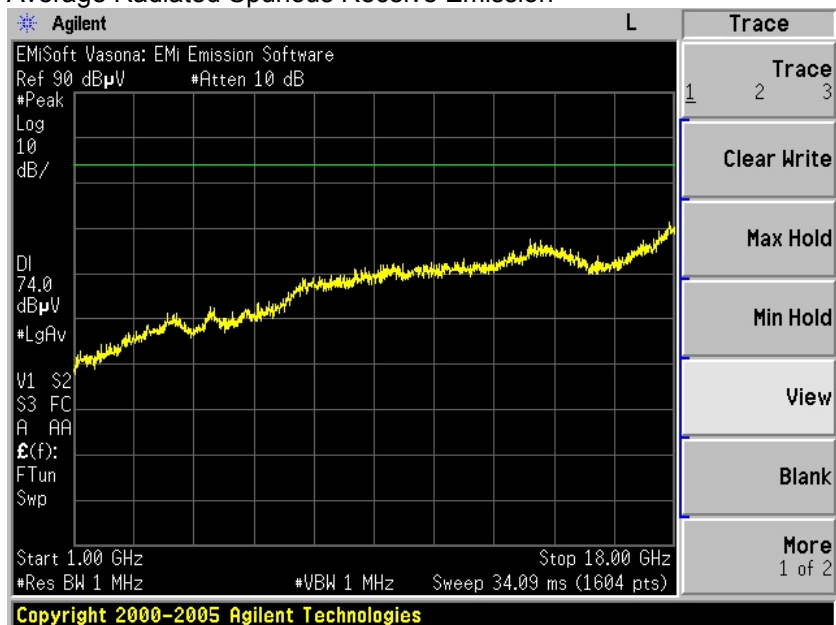

Peak Radiated Spurious Receive Emission

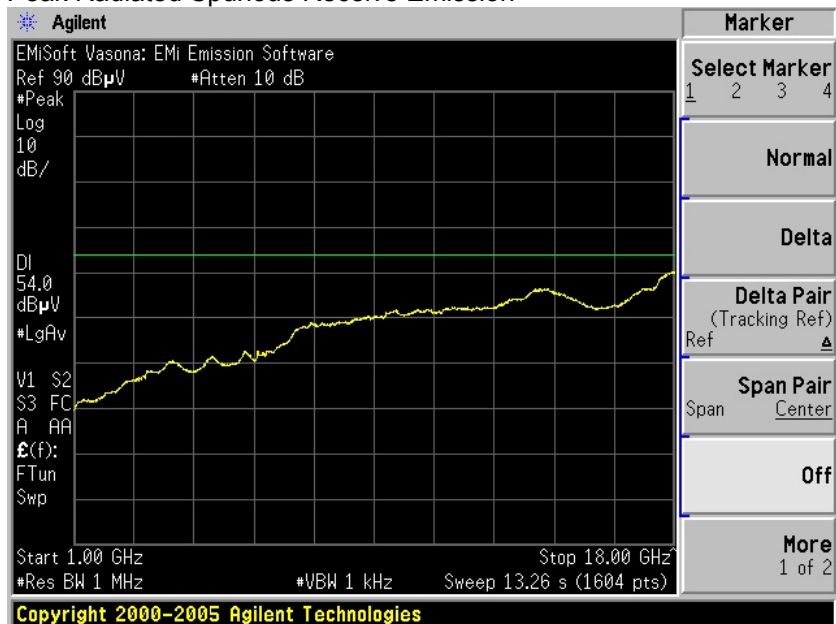




Internal 2.4/5GHz antenna (2/4 dBi)



External 2.4/5GHz antenna (4/7 dBi)

Conducted emissions

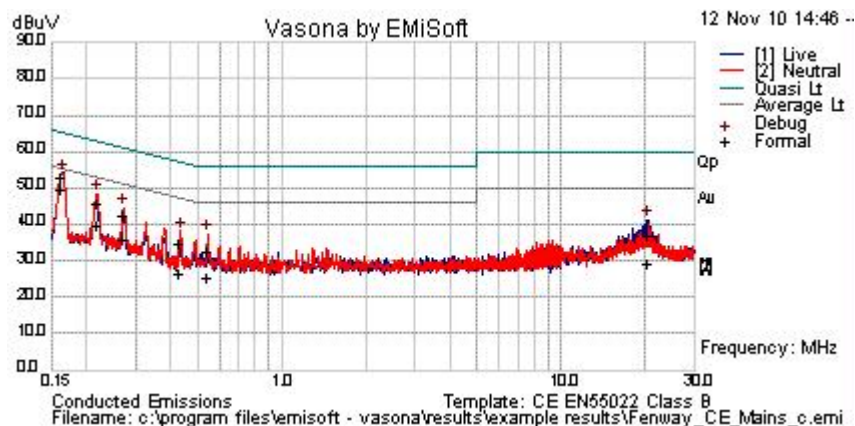


Test Result Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.163094	28.4	20.7	1.2	50.3	Av	N	55.3	-5	Pass	
0.163094	31.3	20.7	1.2	53.2	Qp	N	65.3	-12.1	Pass	
0.217972	24.3	20.4	0.8	45.5	Qp	N	62.9	-17.4	Pass	
0.217972	18.6	20.4	0.8	39.8	Av	N	52.9	-13.1	Pass	
0.269916	21.4	20.4	0.6	42.4	Qp	N	61.1	-18.7	Pass	
0.269916	14.9	20.4	0.6	35.9	Av	N	51.1	-15.3	Pass	
0.433371	5.8	20.4	0.4	26.7	Av	N	47.2	-20.5	Pass	
0.433371	14.1	20.4	0.4	35	Qp	N	57.2	-22.2	Pass	
0.541527	4.8	20.5	0.4	25.6	Av	N	46	-20.4	Pass	
0.541527	11.8	20.5	0.4	32.6	Qp	N	56	-23.4	Pass	
20.491	13.8	22.6	0.4	36.8	Qp	L	60	-23.2	Pass	
20.491	6	22.6	0.4	29.1	Av	L	50	-20.9	Pass	



Title: Conducted Emissions Configuration Photograph

Radiated emissions

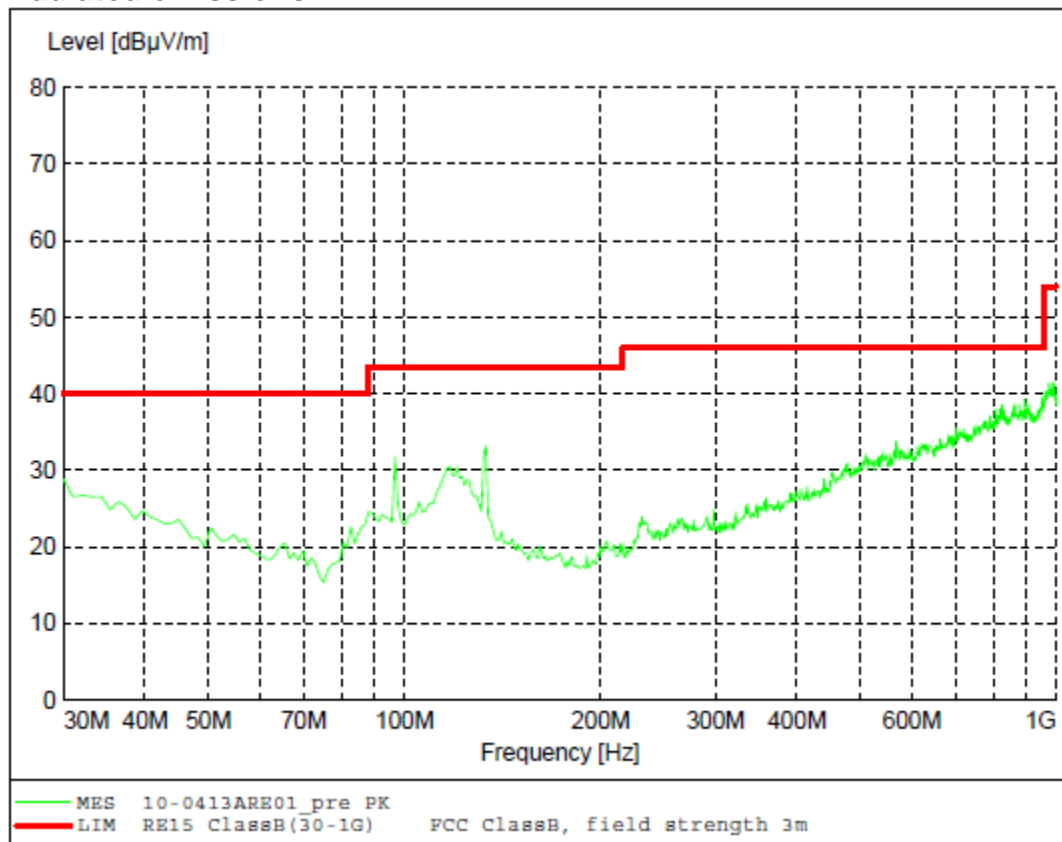

Test Results Table

RADIATED EMISSIONS - FIELD STRENGTH (dBuV/m)															
ACS Project #:		10-0413	Test Conditions				Notes								
Test Date:		11/24/10	Temp °C		22.8	1) Peak Measurement									
Technician:		S Wismer	Humid. %		42.1	2)									
Manufacturer:		CISCO	Conditions		NA	3)									
EUT Model Name:		Air-CAP1552C	4)												
EUT Serial #			Antennas												
Ant. Distance (<=1GHz):		3	9kHz-30MHz		NA	6)									
Ant. Distance (1-10GHz):		3	30MHz-200MHz		25	7)									
Ant. Distance (>10GHz):		1	200MHz-1GHz		25	8)									
Class:		B	1GHz - 18GHz		30	9)									
Duty Cycle(%):		100	10)												
Filter (BPF&HPF)		None	Cable Set >1GHz		HF Set (1)	11)									
Location		SAC	12)												
LF Amp (to 1GHz):		73	13)												
HF Amp (1 to 26.5GHz):		338	Operating Voltage		00Vac	14)									
HF Amp (26.5 to 40GHz):			Pre-Scan File #		ARE01	15)									
Rule Part		15.109	Frequency Range Tested: 30MHz to 25GHz												
Fundamental Frequency (MHz)		100	EUT Configuration/Mode of Operation: Transfer files over 2.4GHz and 5.8GHz WiFi Link												
Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Restricted Band	Average Required	Notes
	pk	Qpk/Avg					pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg			
Fundamental Frequency - (Use for Parts 15.209, 15.231, 15.247 & 15.249 Intentional Radiators Only)															
Do Not Populate			H										n	y	
Do Not Populate			V										n	y	
Spurious Emissions															
30		33.65	V	100	223	-6.80		26.85		40.0		13.2	n	n	1
45.1		41.40	V	100	105	-14.45		26.95		40.0		13.1	n	n	1
92.8		40.10	V	100	201	-15.85		24.25		43.5		19.3	n	n	1
96.9		42.70	V	100	201	-15.21		27.49		43.5		16.0	n	n	1
133.5		39.80	H	302	0	-13.47		26.33		43.5		17.4	y	n	
231.5		45.80	V	100	0	-13.82		31.98		46.0		14.0	n	n	1
336.1		24.50	V	100	180	-9.81		14.69		46.0		31.3	n	n	1
478.4		24.80	H	100	0	-5.51		19.29		46.0		26.7	n	n	1
701.5		23.90	V	100	0	-1.01		22.89		46.0		23.1	n	n	1
953.7		24.70	H	100	0	2.95		27.65		46.0		18.4	n	n	
1420	47.30	35.90	H	100	139	-10.69	36.61	25.21	74.0	54.0	37.4	28.8	y	y	
1420			V	100		-10.69			74.0	54.0			y	y	

Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 \cdot P \cdot G)/d} \quad \text{and} \quad S = E^2/3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm²

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 \cdot P \cdot G)/(3770 \cdot S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W})/1000 \quad d(\text{cm}) = 100 \cdot d(\text{m})$$

yields

$$d = 100 \cdot \sqrt{((30 \cdot (P/1000) \cdot G)/(3770 \cdot S))}$$

$$d = 0.282 \cdot \sqrt{(P \cdot G/S)}$$

where

d=Distance in cm

P=Power in mW

G=Numerica Antenna Gain

S=Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm})/10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi})/10)}$$

yields

$$d = 0.282 \cdot 10^{((P+G)/20)} / \sqrt{S}$$

Equation (1)

and

$$s = ((0.282 \cdot 10^{((P+G)/20)})/d)^2$$

Equation (2)

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm²



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$ maximum. The highest supported antenna gain is 4 dBi (7dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Bit Rate (Mbps)	Power Density (mW/cm ²)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
2412	11	1	28.0	4	11.23	20	8.77
2437	11	1	28.0	4	11.23	20	8.77
2462	11	1	28.0	4	11.23	20	8.77
2412	6	1	28.0	7	15.86	20	4.14
2437	6	1	28.0	7	15.86	20	4.14
2462	6	1	28.0	7	15.86	20	4.14

MPE Calculations

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	Bit Rate (Mbps)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Margin (mW/cm ²)
2412	11	20	28.0	4	0.32	1	0.68
2437	11	20	28.0	4	0.32	1	0.68
2462	11	20	28.0	4	0.32	1	0.68
2412	6	20	28.0	7	0.63	1	0.37
2437	6	20	28.0	7	0.63	1	0.37
2462	6	20	28.0	7	0.63	1	0.37

**Appendix C: Test Equipment/Software Used to perform the test**

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
CIS002119	EMC Test Systems	3115	Double Ridged Guide Horn Antenna	30-Jun-10	30-Jun-11
CIS005568	HP	8449B	Broadband Preamplifier	01-Oct-10	01-Oct-11
CIS008195	TTE	H613-150K-50-21378	Hi Pass Filter - 150KHz cutoff	5-Jan-10	5-Jan-11
CIS045995	Fischer	F-090527-1009-2	LISN Adaptor	22-Jun-10	22-Jun-11
CIS020975	Micro-Coax	UFB311A-0-1344-520520	RF Coaxial Cable, to 18GHz, 134.4 in	25-Feb-10	25-Feb-11
CIS025662	Micro-Coax	UFB311A-1-0840-504504	RF Coaxial Cable, to 18GHz, 84 in	4-Mar-10	4-Mar-11
CIS030559	Micro-Coax	UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	25-Feb-10	25-Feb-11
CIS030652	Sunol Sciences	JB1	Combination Antenna, 30MHz-2GHz	27-Jul-10	27-Jul-11
CIS035613	Micro-Tronics	BRM50702-02	Notch Filter, SB:2.4-2.5GHz	4-Jun-10	4-Jun-11
CIS034972	Midwest Microwave	ATT-0640-20-29M-02	Attenuator, 20dB	14-May-10	14-May-11
CIS036716	Cisco	RF Coaxial Cable-SMA	Radio Test Cable, SMA-SMA	15-Dec-09	15-Dec-10
CIS037581	ETS-Lindgren	3117	Double Ridged Waveguide Horn Antenna	22-Jun-10	22-Jun-11
CIS040603	Agilent	E4440A	Spectrum Analyzer	04-Aug-10	04-Aug-11
CIS041990	MegaPhase	EM18-NKNK-320	RF 18GHz N-Type cable	25-Feb-10	25-Feb-11
COM000590	Agilent	E4448A	Spectrum Analyzer	28-May-10	28-May-11
COM000601	Agilent	E4417A	EPM-P Series Power Meter	6-Oct-10	6-Oct-11
COM000602	Agilent	E9327A	Peak and Avg Power Sensor	6-Oct-10	6-Oct-11