



Test Report

AIR-CAP3602y-A-K9

Cisco Aironet 802.11n Dual Band Access Points

FCC ID: LDK102075

IC: 2461B-102075

(Also covers AIR-CAP3602y-N-K9, AIR-CAP3602y-T-K9)

y = E (External Antenna) or I (Internal Antenna)

2400-2483.5 MHz

Against the following Specifications:

CFR47 Part 15.247

RSS210

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW3

1.1 TEST SUMMARY3

SECTION 2: ASSESSMENT INFORMATION.....4

2.1 GENERAL4

2.4 TESTING FACILITIES5

2.6 EUT DESCRIPTION.....6

SECTION 4: SAMPLE DETAILS.....8

APPENDIX A: EMISSION TEST RESULTS9

AVERAGE OUTPUT POWER9

6DB BANDWIDTH10

99% AND 26DB BANDWIDTH.....20

PEAK OUTPUT POWER.....30

POWER SPECTRAL DENSITY59

CONDUCTED SPURIOUS EMISSIONS69

APPENDIX B: EMISSION TEST RESULTS80

RADIATED BANDEDGE.....80

RADIATED SPURIOUS EMISSIONS.....107

2.4GHZ 5.2DBI OMNI CONDUCTED EMISSIONS116

CONDUCTED EMISSIONS117

RADIATED EMISSIONS.....119

MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....121

APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST.....123



Section 1: Overview

1.1 Test Summary

samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

| Emission | Immunity |
|-----------------------------|----------|
| CFR47 Part 15.247 RSS210 | N/A |

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
 - Temperature 15°C to 35°C (54°F to 95°F)
 - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
 - Humidity 10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
 - 110V 60 Hz (+/-20%)
 - 220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of testing

04-April-2011 – 04-May-2011

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

| | |
|-------------------------|-----------------------|
| Cisco Systems, Inc., | Cisco Systems, Inc. |
| 4125 Highlander Parkway | 170 West Tasman Drive |
| Richfield, OH 44286 | San Jose, CA 95134 |
| USA | USA |

Test Engineers

James Nicholson

2.5 Equipment Assessed (EUT)

AIR-CAP3602E-A-K9 Cisco Aironet 802.11n Dual Band Access Point



2.6 EUT Description

The 3600 Series Cisco Aironet 802.11n Dual Band Access Points support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Legacy CCK, One Antenna, 1 to 11 Mbps
Legacy CCK, Two Antennas, 1 to 11 Mbps
Legacy CCK, Three Antennas, 1 to 11 Mbps
Legacy CCK, Four Antennas, 1 to 11 Mbps

Non HT-20, One Antenna, 6 to 54 Mbps
Non HT-20, Two Antennas, 6 to 54 Mbps
Non HT-20, Three Antennas, 6 to 54 Mbps
Non HT-20, Four Antennas, 6 to 54 Mbps

Non HT-20 Beam Forming, Two Antennas, 6 to 54 Mbps
Non HT-20 Beam Forming, Three Antennas, 6 to 54 Mbps
Non HT-20 Beam Forming, Four Antennas, 6 to 54 Mbps

HT-20, One Antenna, M0 to M7
HT-20, Two Antennas, M0 to M15
HT-20, Three Antennas, M0 to M23
HT-20, Four Antennas, M0 to M23

HT-20 STBC, Two Antennas, M0 to M7
HT-20 STBC, Three Antennas, M0 to M7
HT-20 STBC, Four Antennas, M0 to M7

HT-20 Beam Forming, Two Antennas, M0 to M15
HT-20 Beam Forming, Three Antennas, M0 to M23
HT-20 Beam Forming, Four Antennas, M0 to M23

Non HT-40 Duplicate, One Antenna, 6-54 Mbps
Non HT-40 Duplicate, Two Antennas, 6-54 Mbps
Non HT-40 Duplicate, Three Antennas, 6-54 Mbps
Non HT-40 Duplicate, Four Antennas, 6-54 Mbps

HT-40, One Antenna, M0 to M7
HT-40, Two Antennas, M0 to M15
HT-40, Three Antennas, M0 to M23
HT-40, Four Antennas, M0 to M23

HT-40 STBC, Two Antennas, M0 to M7
HT-40 STBC, Three Antennas, M0 to M7
HT-40 STBC, Four Antennas, M0 to M7



HT-40 Beam Forming, Two Antennas, M0 to M15
HT-40 Beam Forming, Three Antennas, M0 to M23
HT-40 Beam Forming, Four Antennas, M0 to M23

The following antennas are supported by this product series. The items in bold will be specifically tested and cover all others. The data included in this report represent the worst case data for all antennas.

| Frequency | Part Number | Antenna Type | Antenna Gain (dBi) |
|------------------|------------------|--|--------------------|
| 2.4/5 GHz | AIR-ANT2524DB-R | Dual-resonant black dipole | 2 / 4 |
| | AIR-ANT2524DW-R | Dual-resonant white dipole | 2 / 4 |
| | AIR-ANT2524DG-R | Dual-resonant gray dipole | 2 / 4 |
| | Internal | Dual-resonant Omni | 3 / 5 |
| | AIR-ANT2534V4C-R | Dual-resonant ceiling mount omni (4-pack) | 3 / 4 |
| | AIR-ANT2546V4M-R | Dual-resonant omni (4-pack) | 4 / 6 |
| | AIR-ANT2566P4W-R | Dual-resonant "directional" antenna (4-pack) | 6 / 6 |



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

| Sample No. | Equipment Details | Part Number | Manufacturer | Hardware Rev. | Firmware Rev. | Software Rev. | Serial Number |
|------------|-------------------|-------------|---------------|---------------|---------------|---------------|---------------|
| S01 | AIR-CAP3602E-A-K9 | | Cisco Systems | NA | NA | NA | |
| S02 | AIR-PWR-B | 341-0306-01 | Cisco Systems | NA | NA | NA | |
| S03 | AIR-ANT2455V-N | | | | | | |
| S04 | AIR-ANT5160V-R | | | | | | |
| S05 | AIR-ANT2566P4W-R | | | | | | |

4.2 System Details

| System # | Description | Samples |
|----------|-------------|----------|
| 1 | EUT | S01, S02 |

4.3 Mode of Operation Details

| Mode# | Description | Comments |
|-------|-------------------------|-------------------------|
| 1 | Continuous Transmitting | Continuous Transmitting |



Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

| Operating Mode | Maximum Channel Power (dBm) | | |
|--------------------------------------|------------------------------|------------------|------------------|
| | Frequency (MHz) ^f | | |
| | 2412 | 2437 | 2462 |
| Legacy CCK, 1 to 11 Mbps | 22 | 23 | 23 |
| Non HT-20, 6 to 54 Mbps | 17 | 23 | 18 |
| Non HT-20 Beam Forming, 6 to 54 Mbps | 14 | 22 | 15 |
| HT-20, M0 to M23 | 16 | 23 | 17 |
| HT-20 STBC, M0 to M7 | 16 | 23 | 17 |
| HT-20 Beam Forming, M0 to M23 | 18 | 22 | 18 |
| | 2412/2432 | 2427/2447 | 2442/2462 |
| Non HT-40 Duplicate, 6-54 Mbps | 13 | 17 | 12 |
| HT-40, M0 to M23 | 15 | 19 | 14 |
| HT-40 STBC, M0 to M7 | 15 | 19 | 14 |
| HT-40 Beam Forming, M0 to M23 | 15 | 22 | 15 |



6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

| | |
|-----------------------|--|
| Center Frequency: | Frequency from table below |
| Span: | 2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel) |
| Reference Level: | 20 dBm |
| Attenuation: | 10 dB |
| Sweep Time: | 5 s |
| Resolution Bandwidth: | 100 kHz |
| Video Bandwidth: | 100 kHz |
| X dB Bandwidth: | 6 dB |
| Detector: | Peak |
| Trace: | Single |


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:




| Frequency (MHz) | Mode | Data Rate (Mbps) | 6dB BW (MHz) | Limit (kHz) | Margin (MHz) |
|-----------------|--------------------------------------|------------------|--------------|-------------|--------------|
| 2412 | Legacy CCK, 1 to 11 Mbps | 11 | 9.1 | >500 | 8.6 |
| | Non HT-20, 6 to 54 Mbps | 6 | 16.4 | >500 | 15.9 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 16.4 | >500 | 15.9 |
| | HT-20, M0 to M23 | m0 | 17.8 | >500 | 17.3 |
| | HT-20 STBC, M0 to M7 | m0 | 17.8 | >500 | 17.3 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 17.8 | >500 | 17.3 |
| 2437 | Legacy CCK, 1 to 11 Mbps | 11 | 9.6 | >500 | 9.1 |
| | Non HT-20, 6 to 54 Mbps | 6 | 16.4 | >500 | 15.9 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 16.4 | >500 | 15.9 |
| | HT-20, M0 to M23 | m0 | 17.7 | >500 | 17.2 |
| | HT-20 STBC, M0 to M7 | m0 | 17.7 | >500 | 17.2 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 17.7 | >500 | 17.2 |
| 2462 | Legacy CCK, 1 to 11 Mbps | 11 | 9.6 | >500 | 9.1 |
| | Non HT-20, 6 to 54 Mbps | 6 | 16.4 | >500 | 15.9 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 16.4 | >500 | 15.9 |
| | HT-20, M0 to M23 | m0 | 17.7 | >500 | 17.2 |
| | HT-20 STBC, M0 to M7 | m0 | 17.7 | >500 | 17.2 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 17.7 | >500 | 17.2 |
| 2412/2432 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 36.5 | >500 | 36.0 |
| | HT-40, M0 to M23 | m0 | 36.5 | >500 | 36.0 |
| | HT-40 STBC, M0 to M7 | m0 | 36.5 | >500 | 36.0 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 36.5 | >500 | 36.0 |
| 2427/2447 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 36.5 | >500 | 36.0 |
| | HT-40, M0 to M23 | m0 | 36.5 | >500 | 36.0 |
| | HT-40 STBC, M0 to M7 | m0 | 36.5 | >500 | 36.0 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 36.5 | >500 | 36.0 |
| 2442/2462 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 36.5 | >500 | 36.0 |
| | HT-40, M0 to M23 | m0 | 36.5 | >500 | 36.0 |
| | HT-40 STBC, M0 to M7 | m0 | 36.5 | >500 | 36.0 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 36.5 | >500 | 36.0 |



6dB Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK

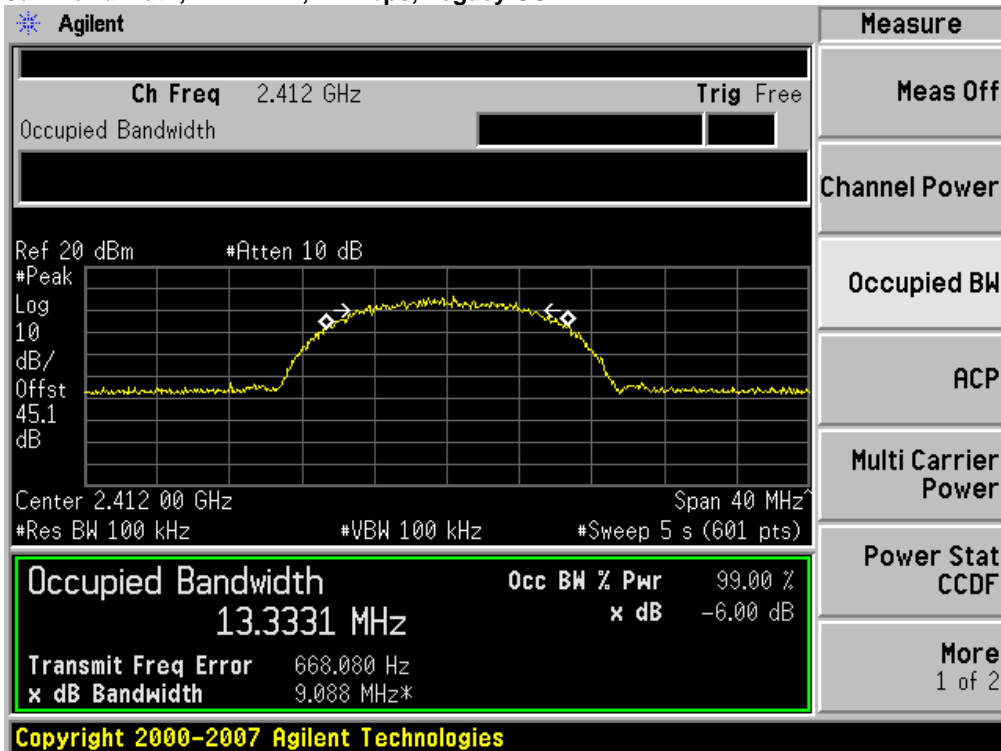


6dB Bandwidth, 2412 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

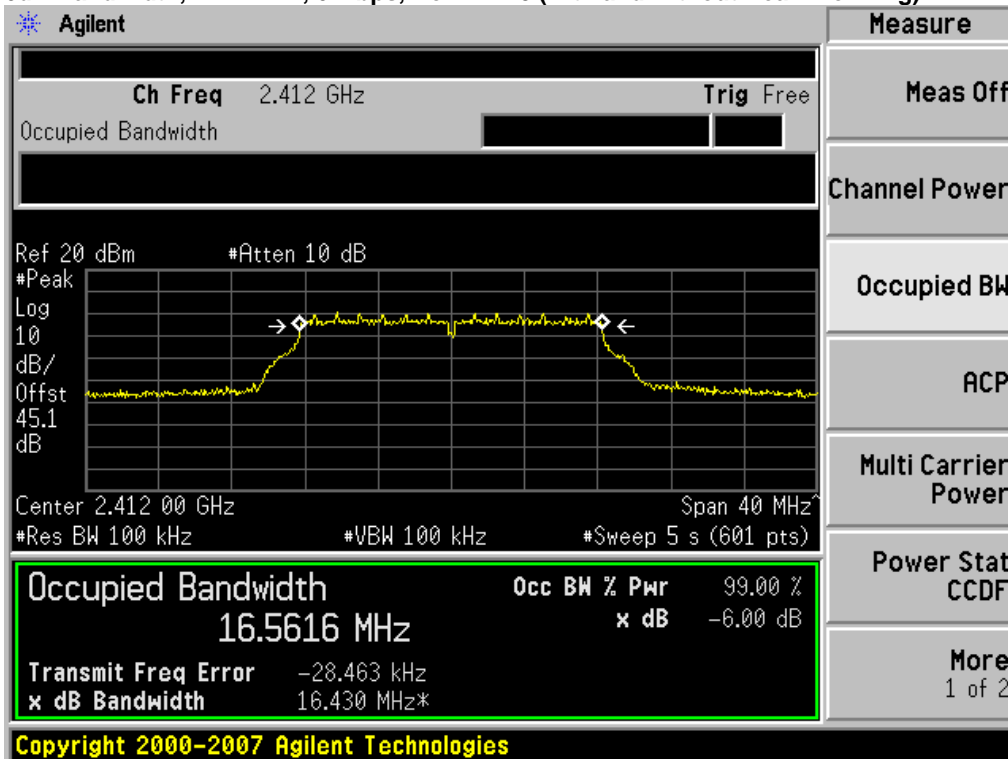




6dB Bandwidth, 2412 MHz, m0, HT20 (with and without Beam Forming / STBC)

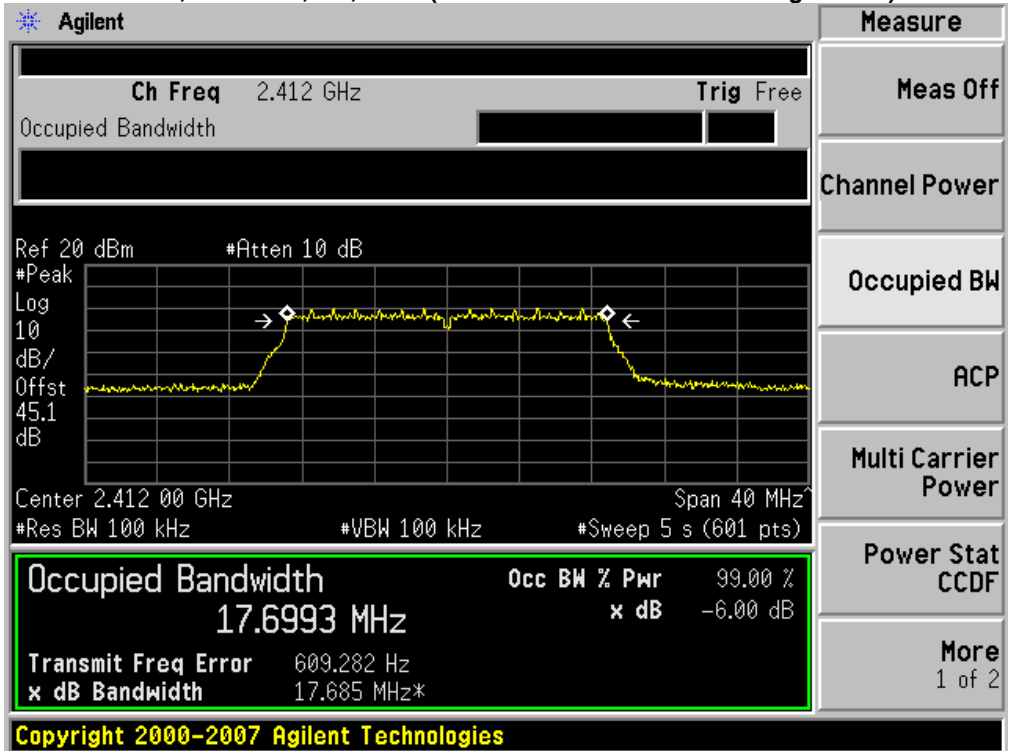


6dB Bandwidth, 2437 MHz, 11 Mbps, Legacy CCK

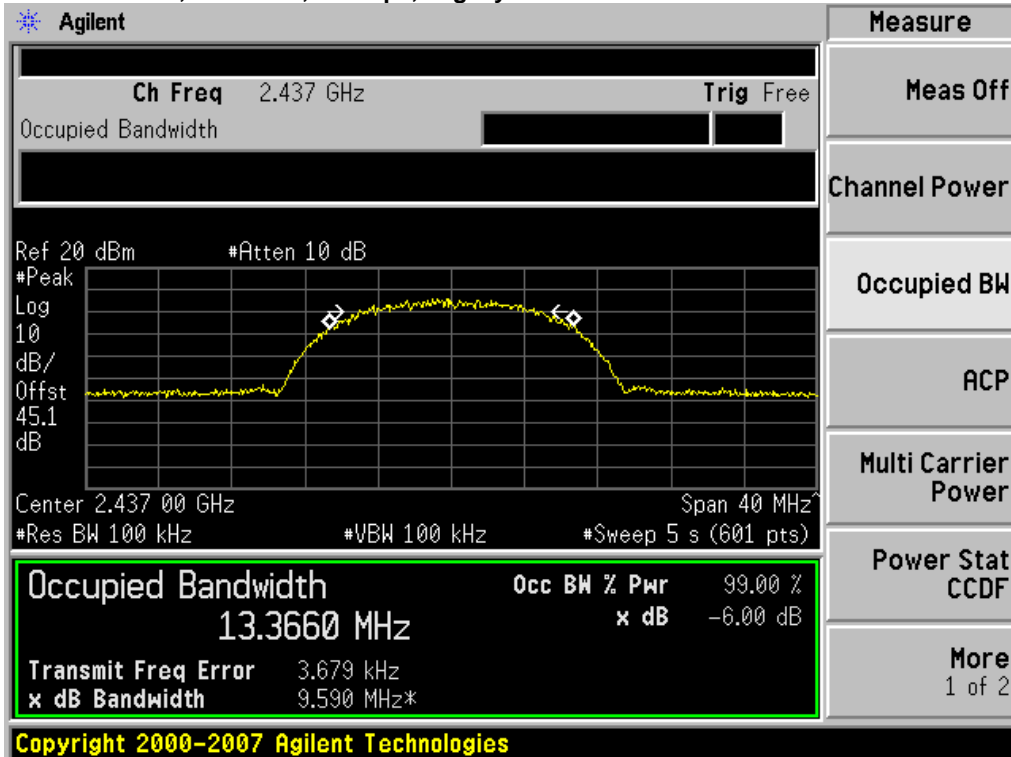




6dB Bandwidth, 2437 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

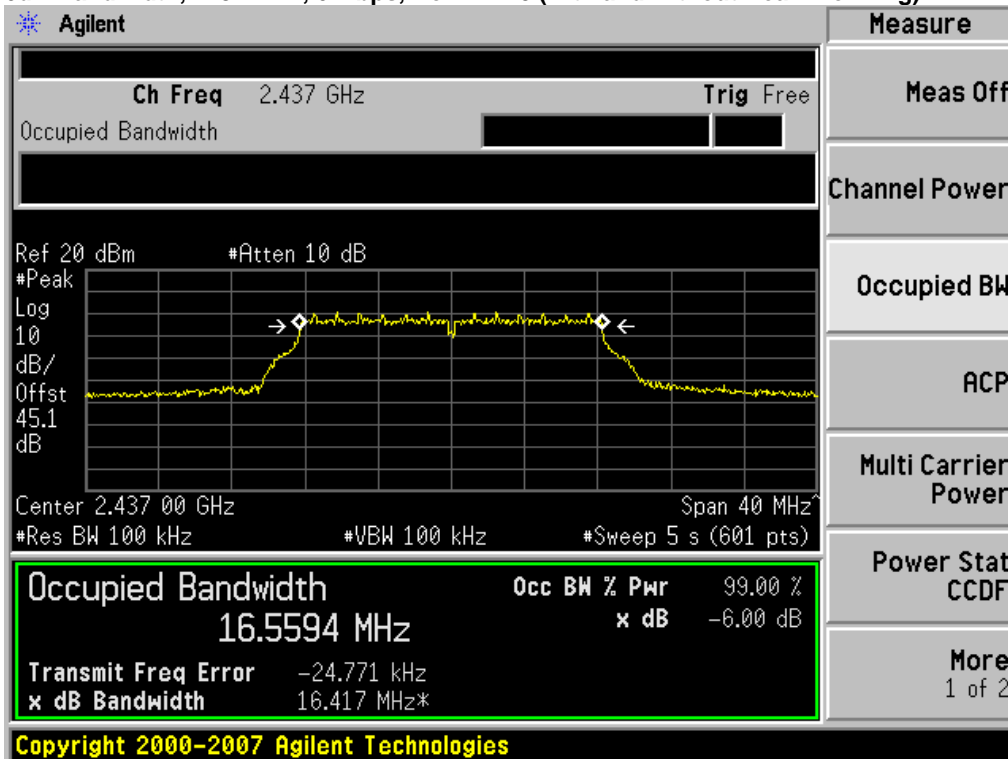


6dB Bandwidth, 2437 MHz, m0, HT20 (with and without Beam Forming / STBC)

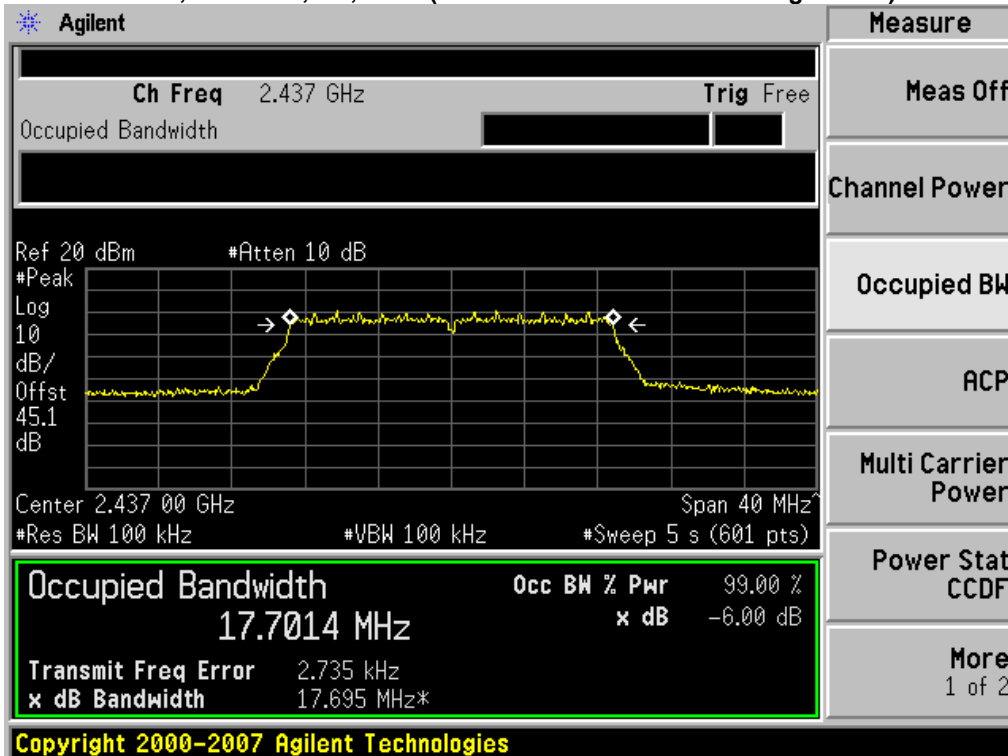




6dB Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK

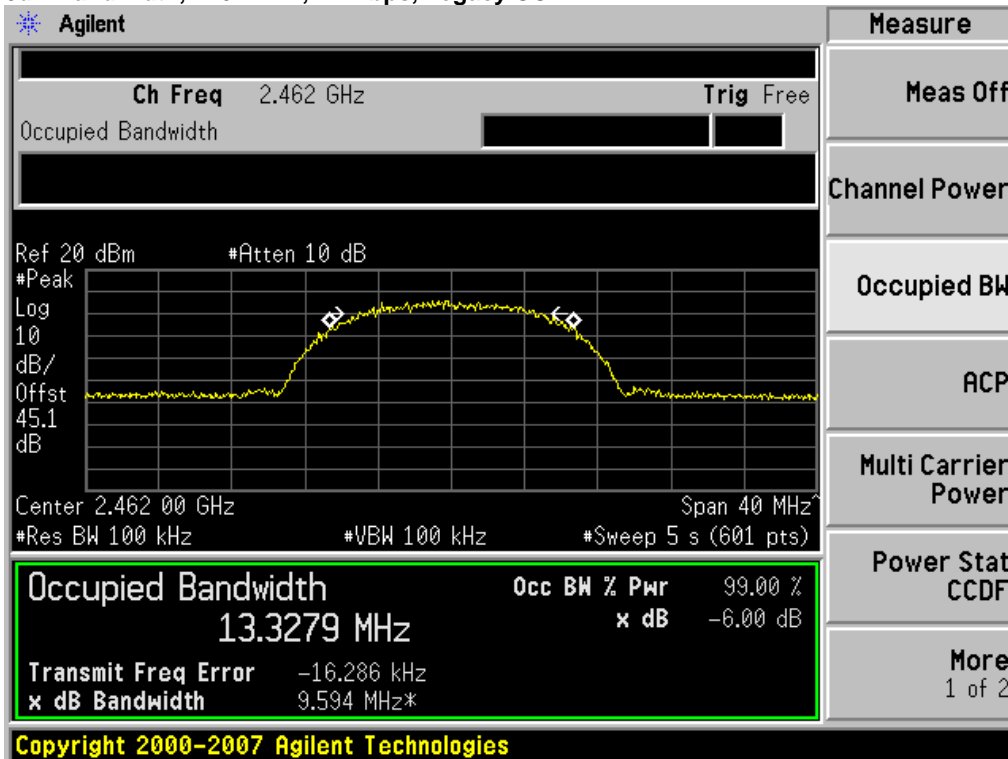


6dB Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

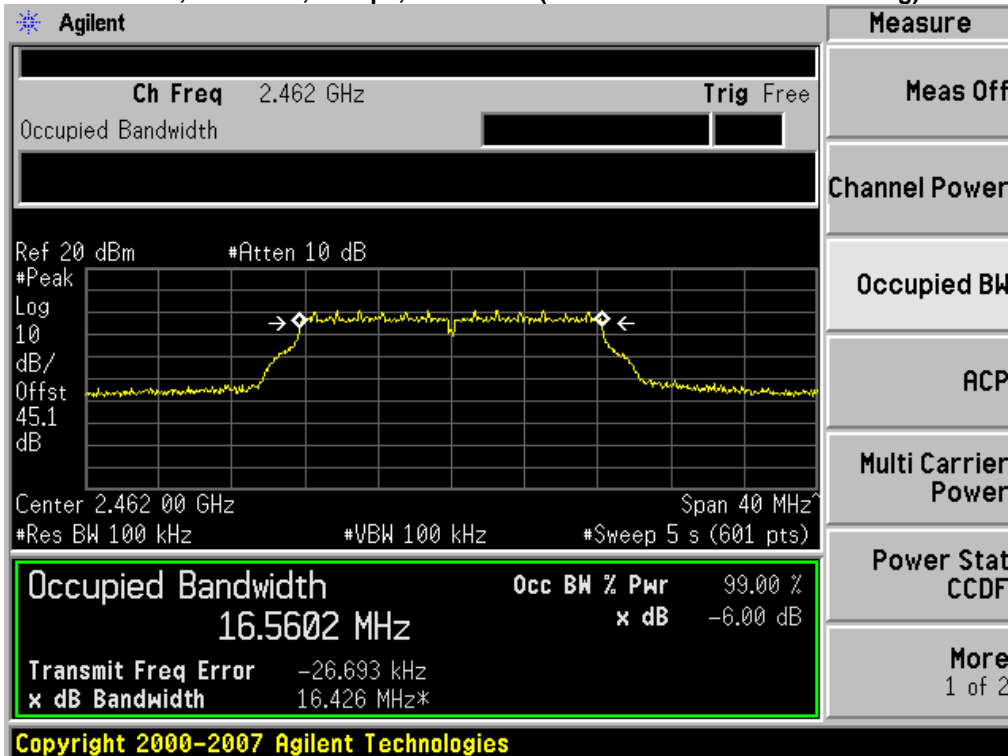




6dB Bandwidth, 2462 MHz, m0, HT20 (with and without Beam Forming / STBC)

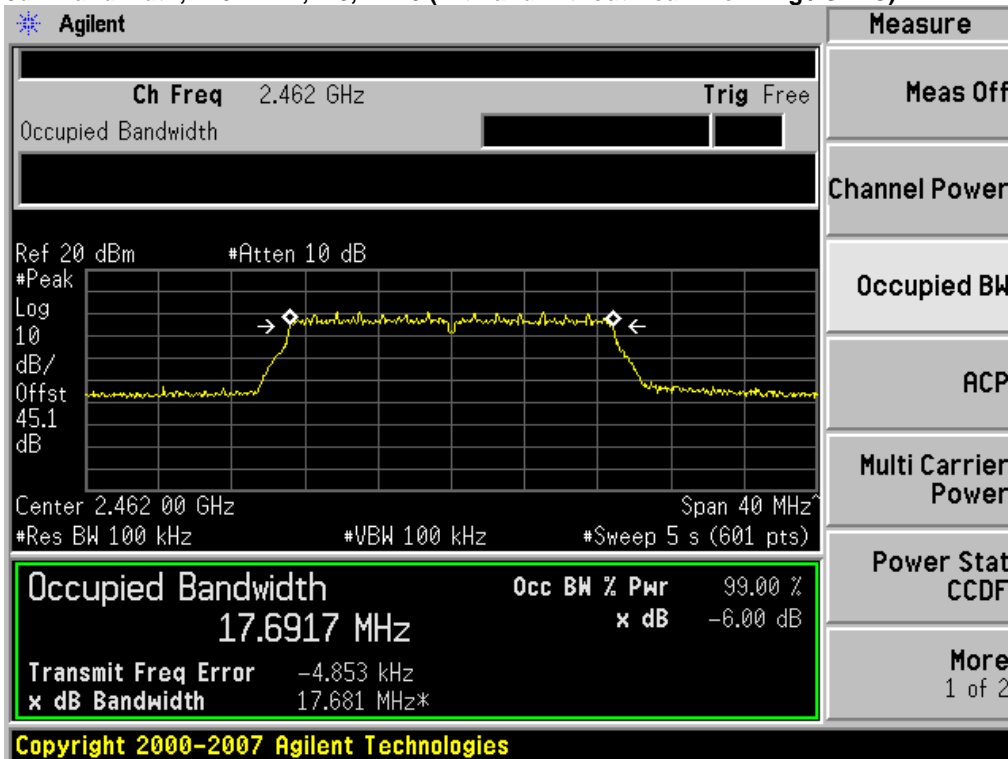


6dB Bandwidth, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate

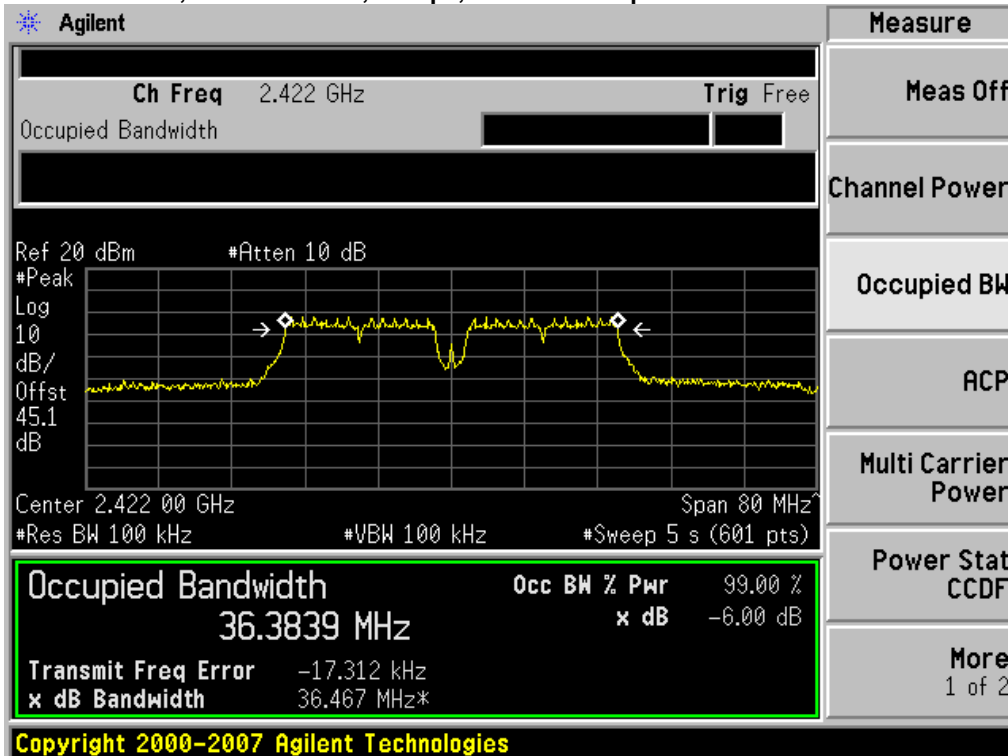




6dB Bandwidth, 2412/2432 MHz, m0, HT-40 (with and without Beam Forming / STBC)

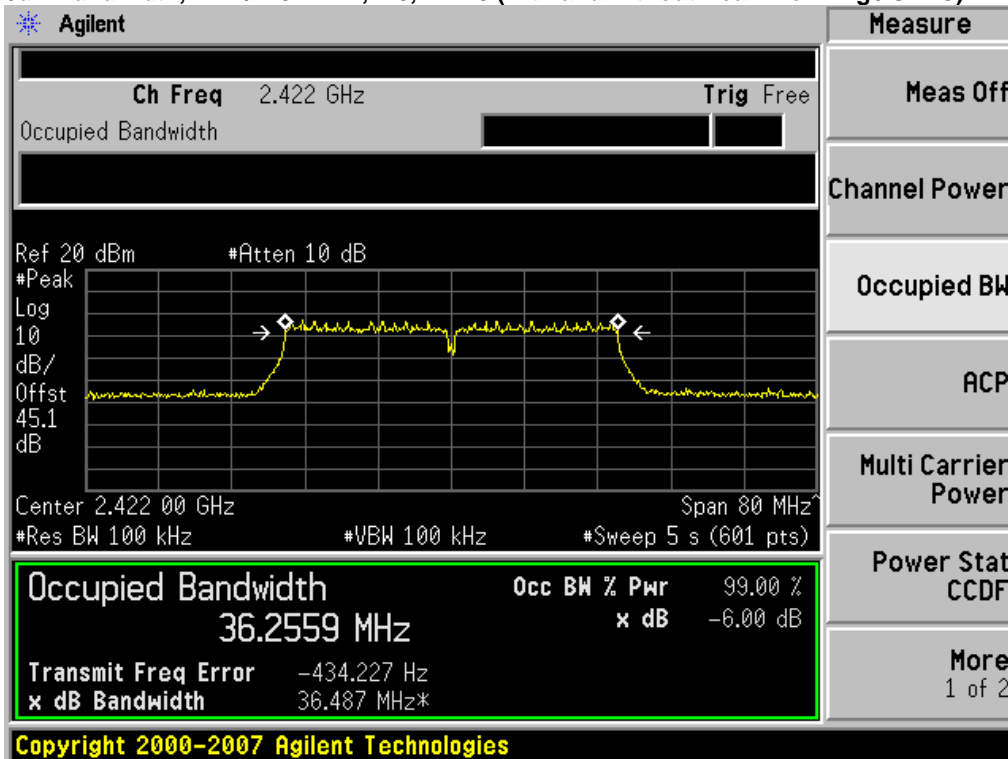


6dB Bandwidth, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate

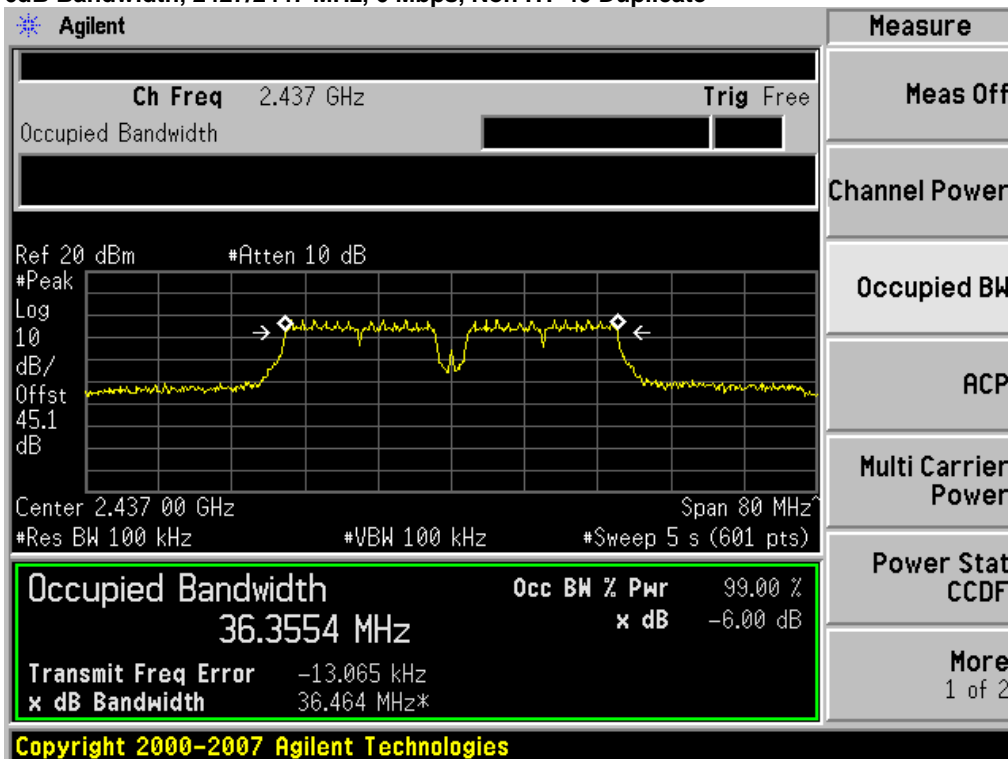




6dB Bandwidth, 2427/2447 MHz, m0, HT-40 (with and without Beam Forming / STBC)

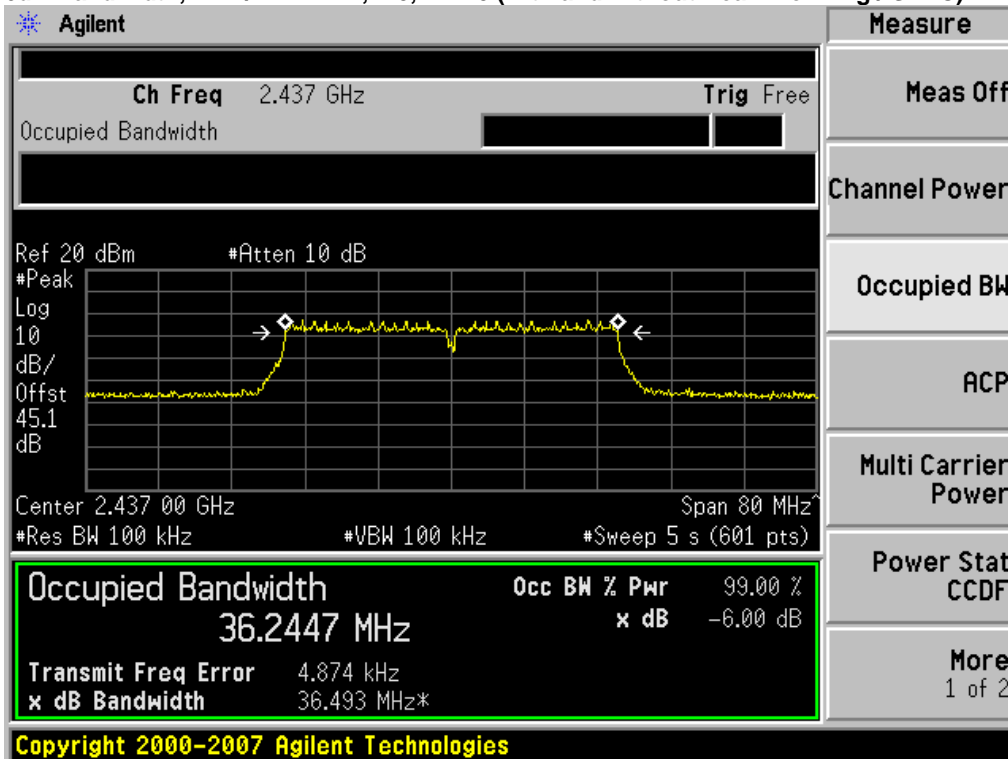

6dB Bandwidth, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate

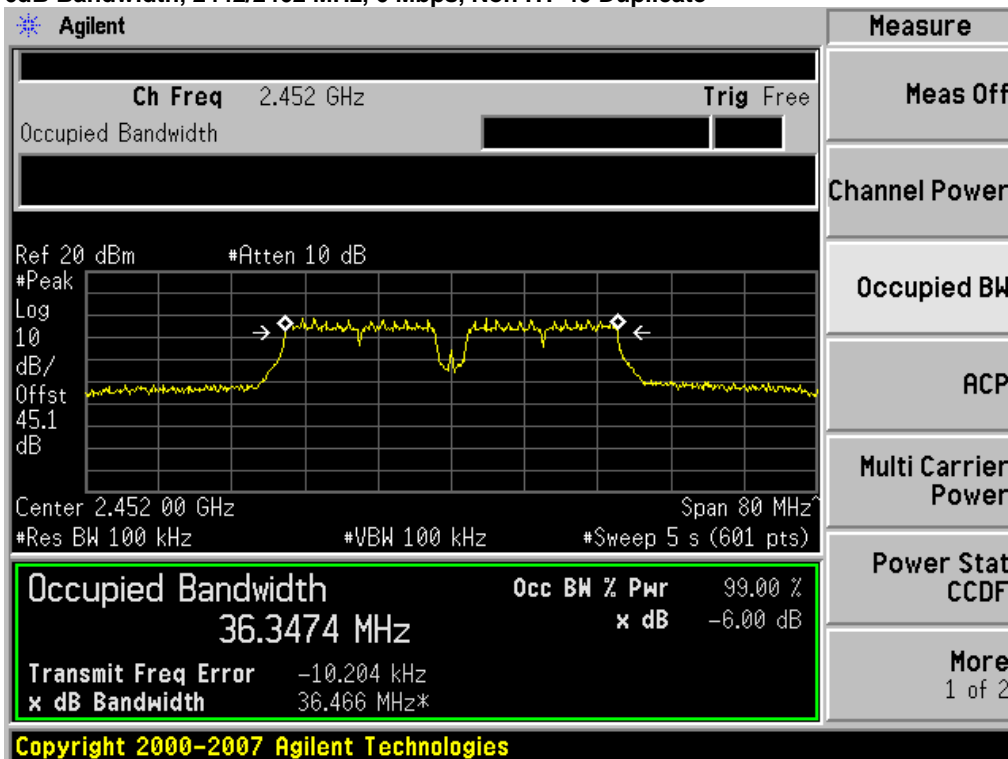



6dB Bandwidth, 2442/2462 MHz, m0, HT-40 (with and without Beam Forming / STBC)

Agilent

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm #Atten 10 dB

#Peak

Log 10 dB/Offst 45.1 dB

Center 2.452 00 GHz Span 80 MHz

#Res BW 100 kHz #VBW 100 kHz #Sweep 5 s (601 pts)

| | | |
|----------------------------|---------------------|----------|
| Occupied Bandwidth | Occ BW % Pwr | 99.00 % |
| 36.2302 MHz | x dB | -6.00 dB |
| Transmit Freq Error | 5.439 kHz | |
| x dB Bandwidth | 36.471 MHz* | |

Copyright 2000-2007 Agilent Technologies

Measure

Meas Off

Channel Power

Occupied BW

ACP

Multi Carrier Power

Power Stat CCDF

More
1 of 2



99% and 26dB Bandwidth

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

| | |
|-----------------------|--|
| Center Frequency: | Frequency from table be.low |
| Span: | 2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel) |
| Reference Level: | 20 dBm |
| Attenuation: | 10 dB |
| Sweep Time: | 5 s |
| Resolution Bandwidth: | 1%-3% of 26 dB Bandwidth |
| Video Bandwidth: | ≥Resolution Bandwidth |
| X dB Bandwidth: | 26 dB |
| Detector: | Peak |
| Trace: | Single |


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:




| Frequency (MHz) | Mode | Data Rate (Mbps) | 26dB BW (MHz) | 99% BW (MHz) |
|-----------------|--------------------------------------|------------------|---------------|--------------|
| 2412 | Legacy CCK, 1 to 11 Mbps | 11 | 16.7 | 13.3 |
| | Non HT-20, 6 to 54 Mbps | 6 | 32.2 | 18.2 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 32.2 | 18.2 |
| | HT-20, M0 to M23 | m0 | 33.7 | 18.5 |
| | HT-20 STBC, M0 to M7 | m0 | 33.7 | 18.5 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 33.7 | 18.5 |
| 2437 | Legacy CCK, 1 to 11 Mbps | 11 | 16.7 | 13.3 |
| | Non HT-20, 6 to 54 Mbps | 6 | 31.0 | 18.2 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 31.0 | 18.2 |
| | HT-20, M0 to M23 | m0 | 34.8 | 18.5 |
| | HT-20 STBC, M0 to M7 | m0 | 34.8 | 18.5 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 34.8 | 18.5 |
| 2462 | Legacy CCK, 1 to 11 Mbps | 11 | 16.6 | 13.3 |
| | Non HT-20, 6 to 54 Mbps | 6 | 30.9 | 18.0 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 30.9 | 18.0 |
| | HT-20, M0 to M23 | m0 | 31.4 | 18.4 |
| | HT-20 STBC, M0 to M7 | m0 | 31.4 | 18.4 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 31.4 | 18.4 |
| 2412/2432 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 71.4 | 38.2 |
| | HT-40, M0 to M23 | m0 | 43.6 | 37.3 |
| | HT-40 STBC, M0 to M7 | m0 | 43.6 | 37.3 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 43.6 | 37.3 |
| 2427/2447 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 71.1 | 38.2 |
| | HT-40, M0 to M23 | m0 | 43.6 | 37.3 |
| | HT-40 STBC, M0 to M7 | m0 | 43.6 | 37.3 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 43.6 | 37.3 |
| 2442/2462 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 68.3 | 38.2 |
| | HT-40, M0 to M23 | m0 | 43.3 | 37.3 |
| | HT-40 STBC, M0 to M7 | m0 | 43.3 | 37.3 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 43.3 | 37.3 |



26dB / 99% Bandwidth, 2412 MHz, 11 Mbps, Legacy CCK

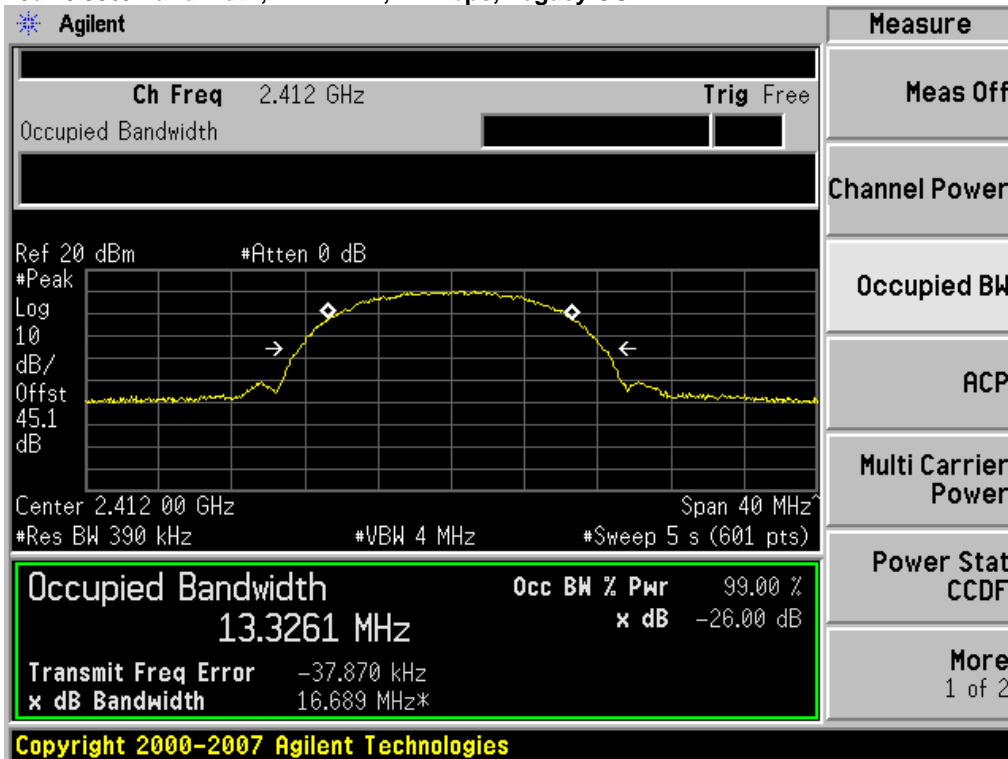


26dB / 99% Bandwidth, 2412 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

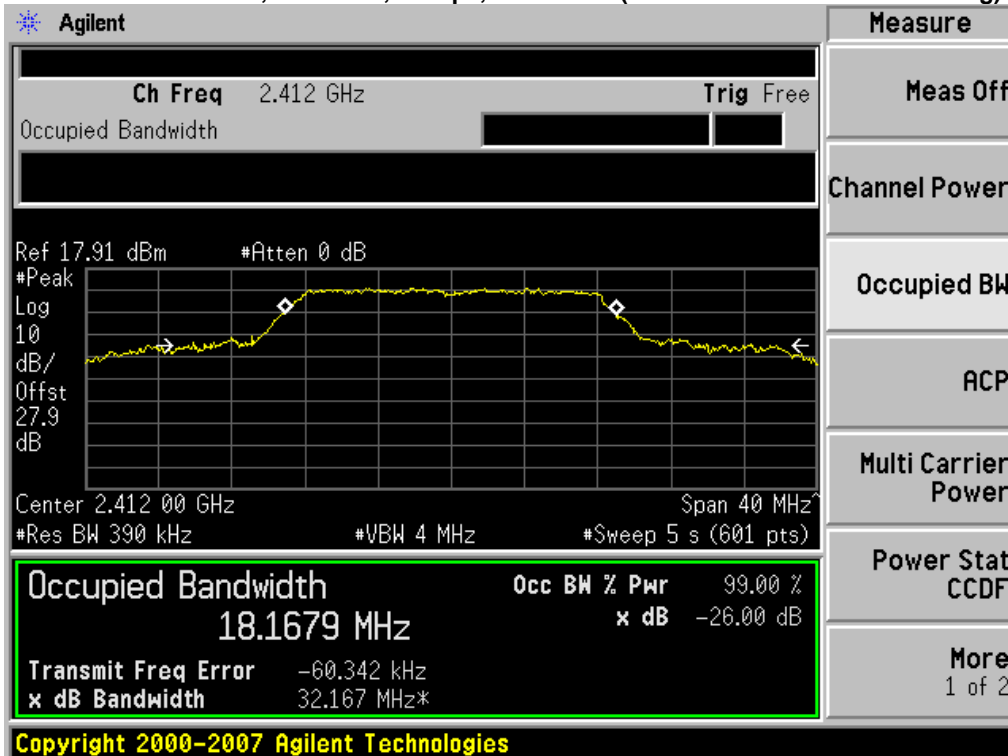




26dB / 99% Bandwidth, 2412 MHz, m0, HT20 (with and without Beam Forming / STBC)

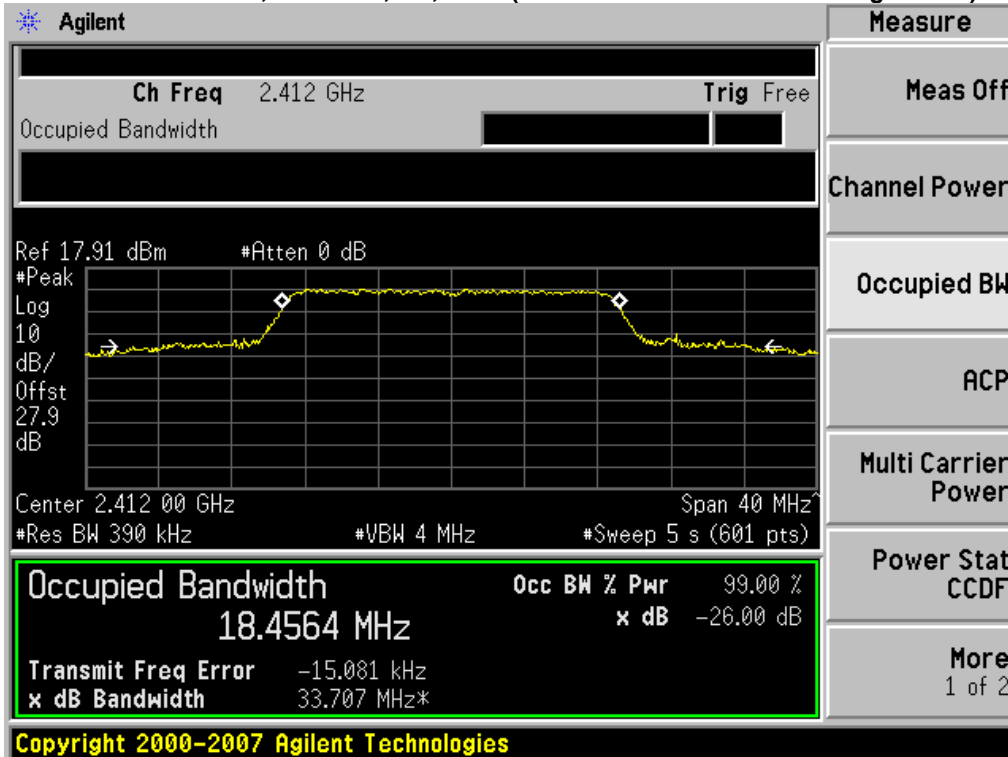


26dB / 99% Bandwidth, 2437 MHz, 11 Mbps, Legacy CCK

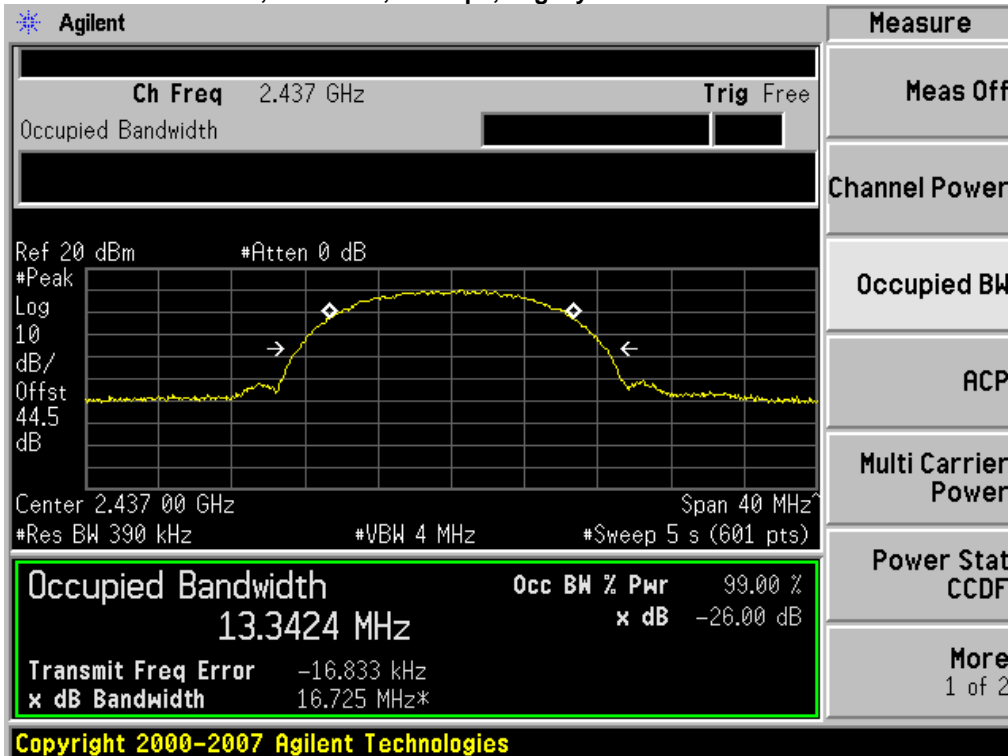




26dB / 99% Bandwidth, 2437 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

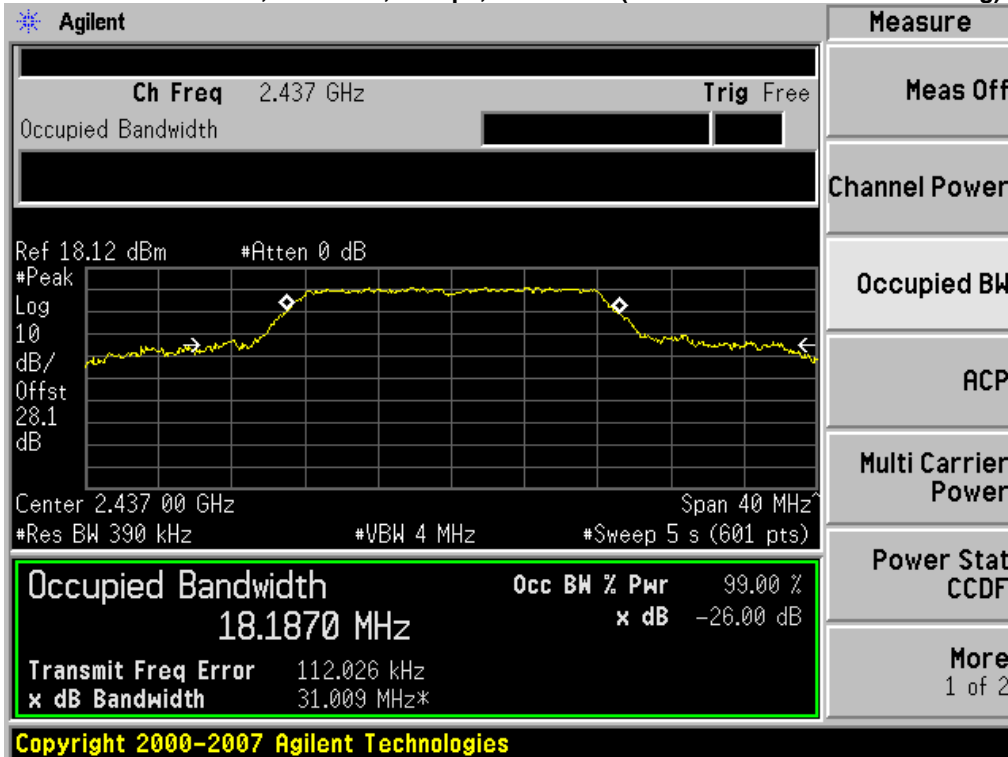


26dB / 99% Bandwidth, 2437 MHz, m0, HT20 (with and without Beam Forming / STBC)

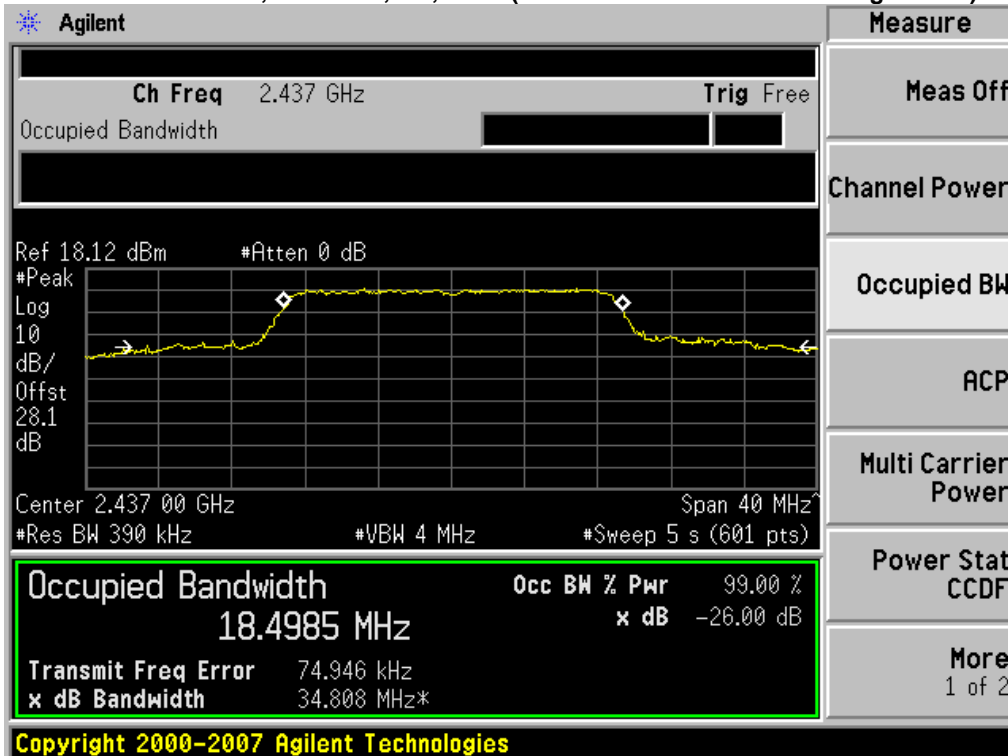




26dB / 99% Bandwidth, 2462 MHz, 11 Mbps, Legacy CCK

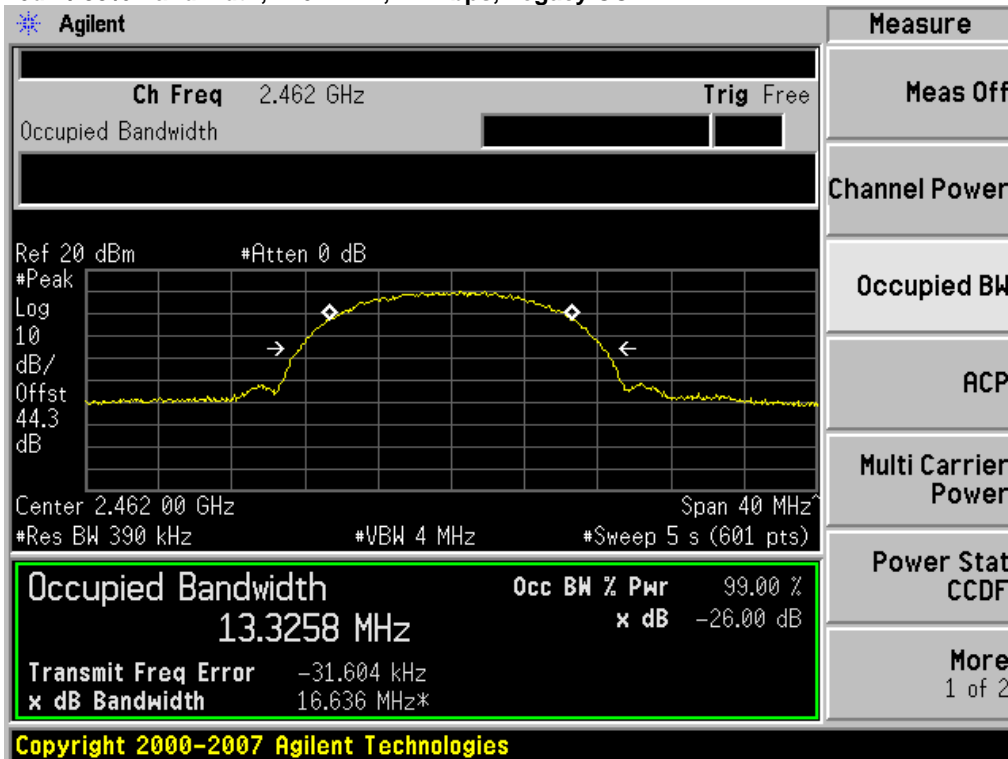


26dB / 99% Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

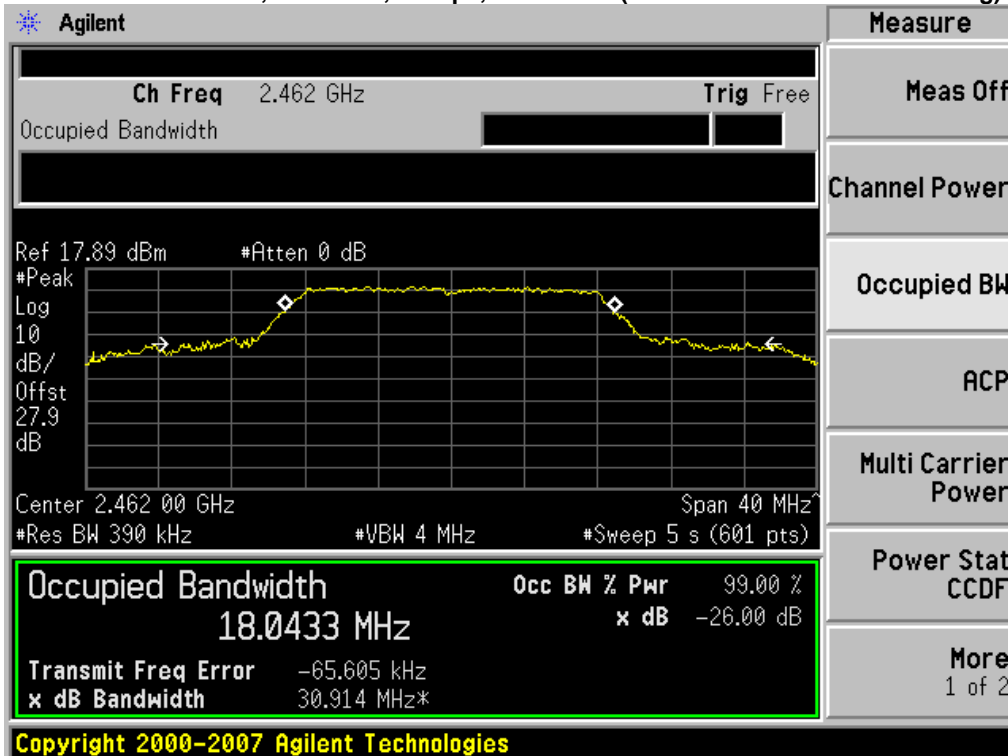




26dB / 99% Bandwidth, 2462 MHz, m0, HT20 (with and without Beam Forming / STBC)

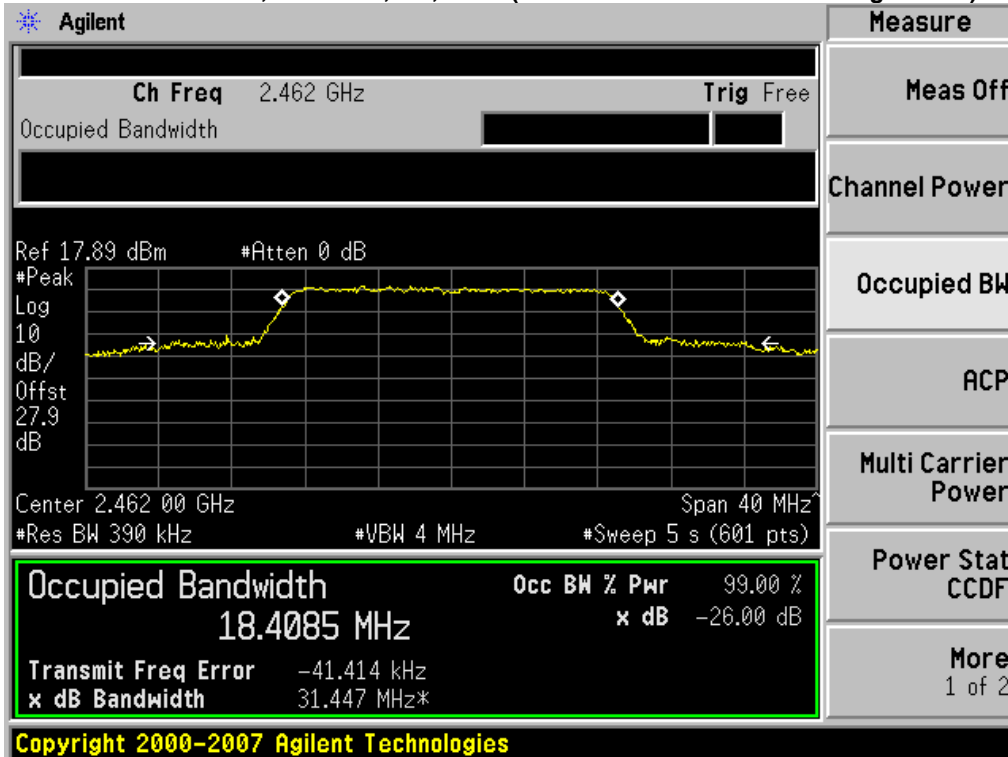


26dB / 99% Bandwidth, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate

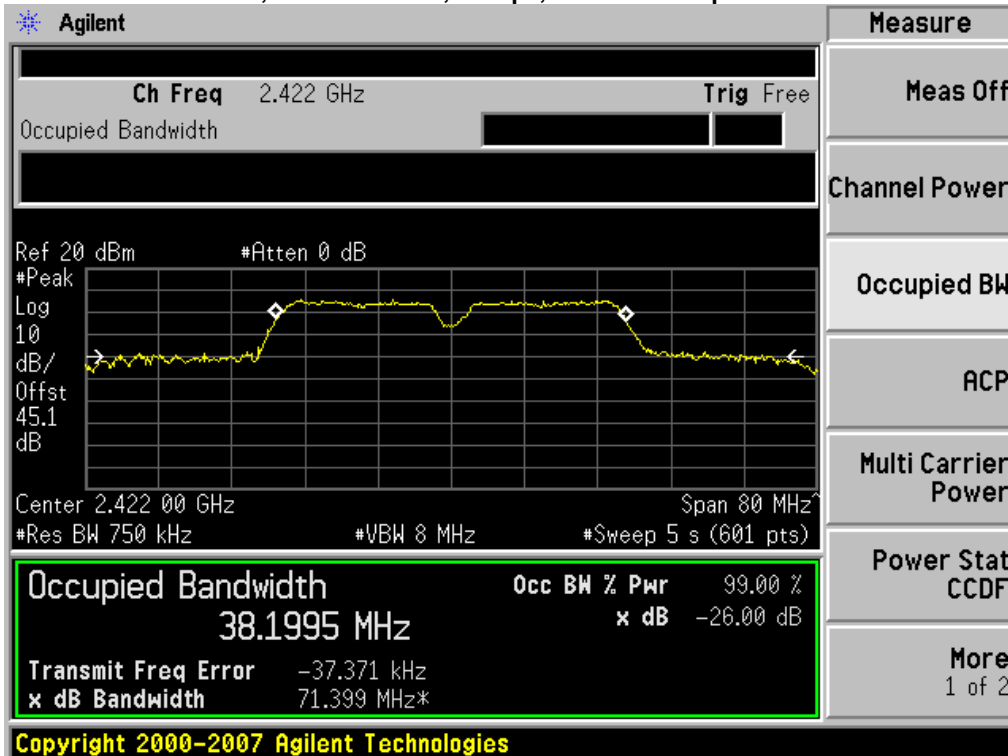




26dB / 99% Bandwidth, 2412/2432 MHz, m0, HT-40 (with and without Beam Forming / STBC)

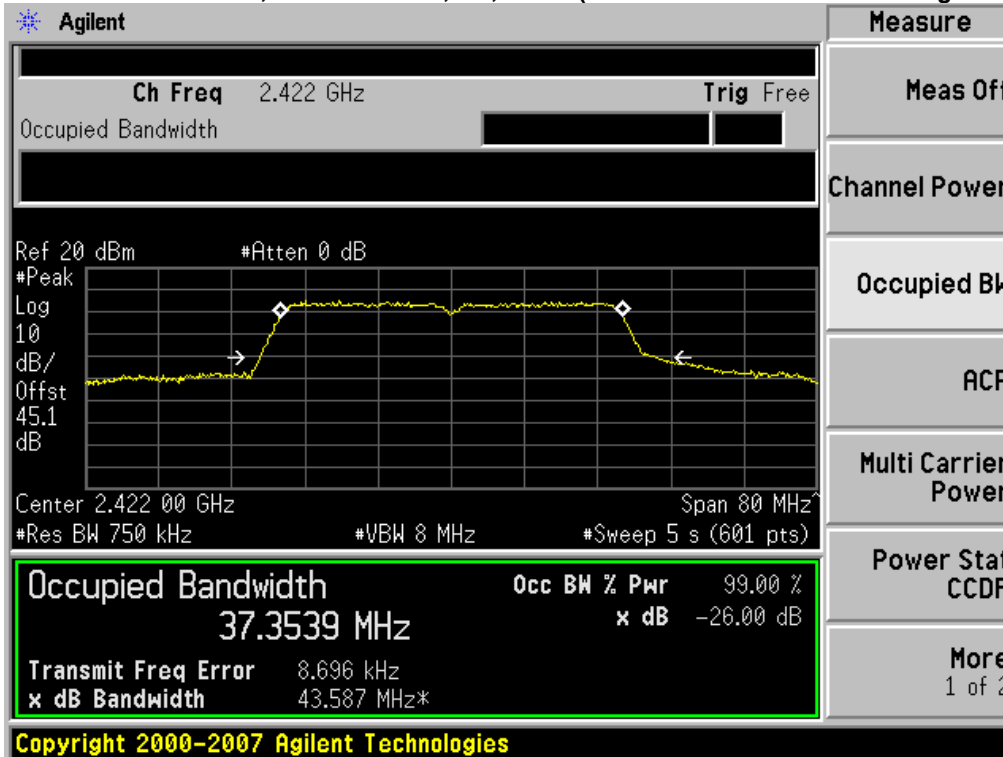


26dB / 99% Bandwidth, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate

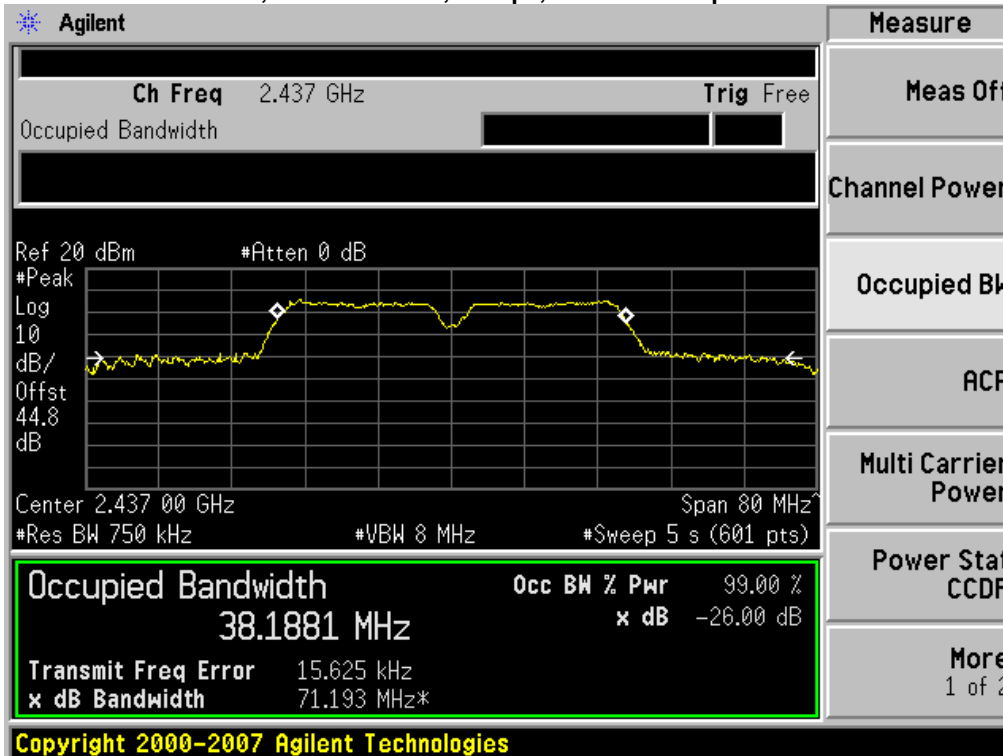




26dB / 99% Bandwidth, 2427/2447 MHz, m0, HT-40 (with and without Beam Forming / STBC)

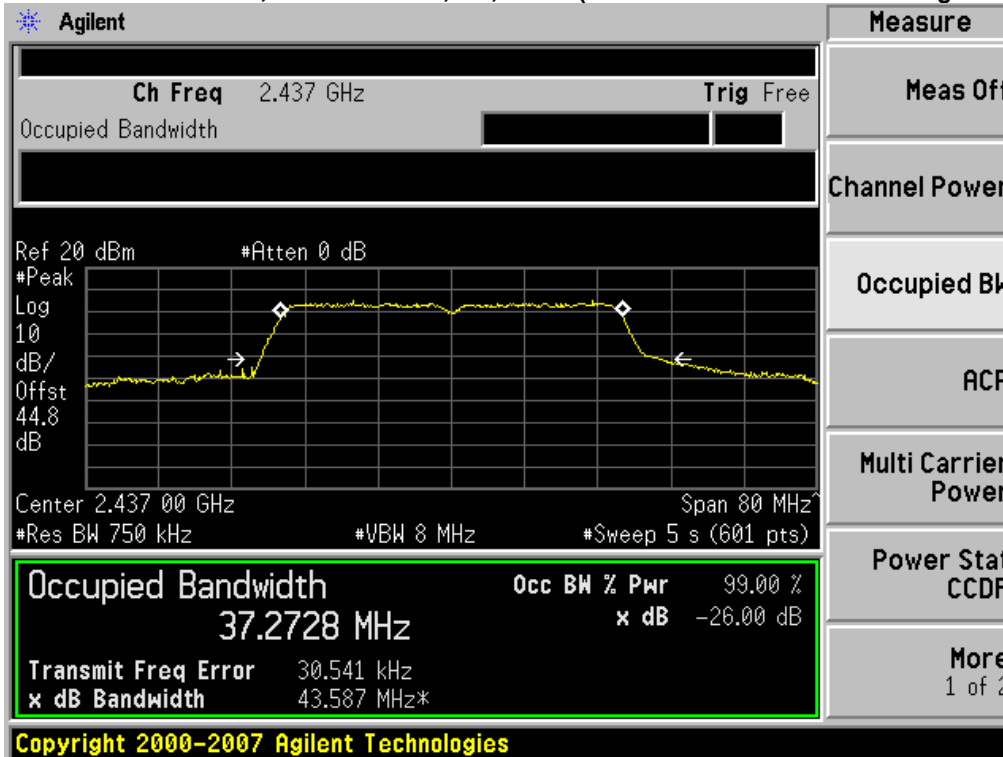


26dB / 99% Bandwidth, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate

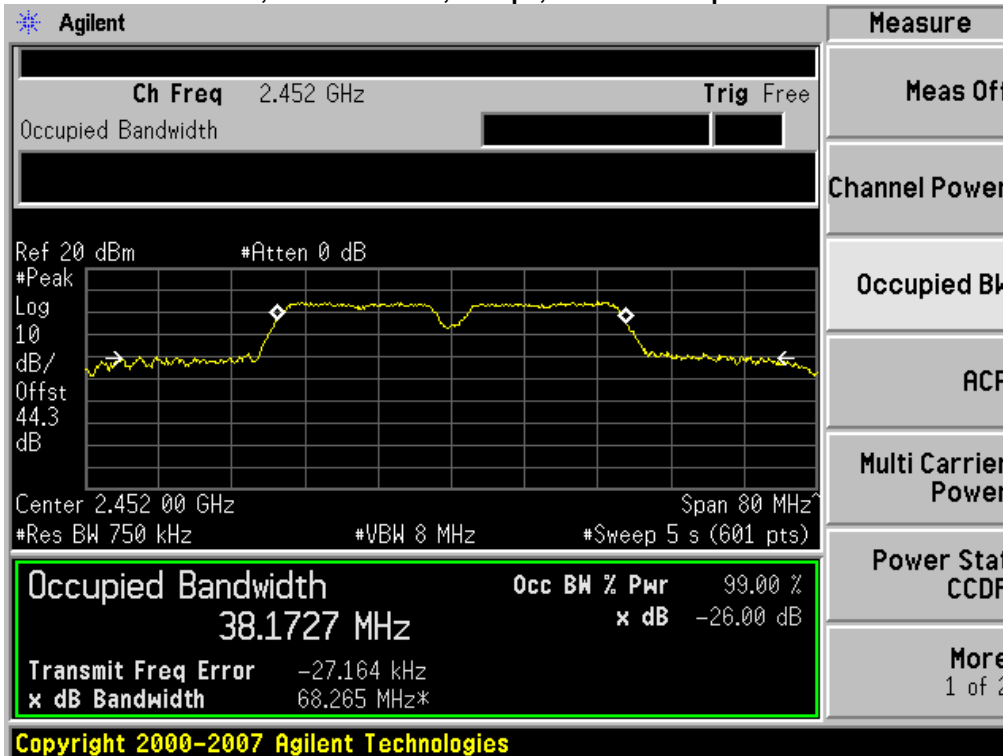



26dB / 99% Bandwidth, 2442/2462 MHz, m0, HT-40 (with and without Beam Forming / STBC)

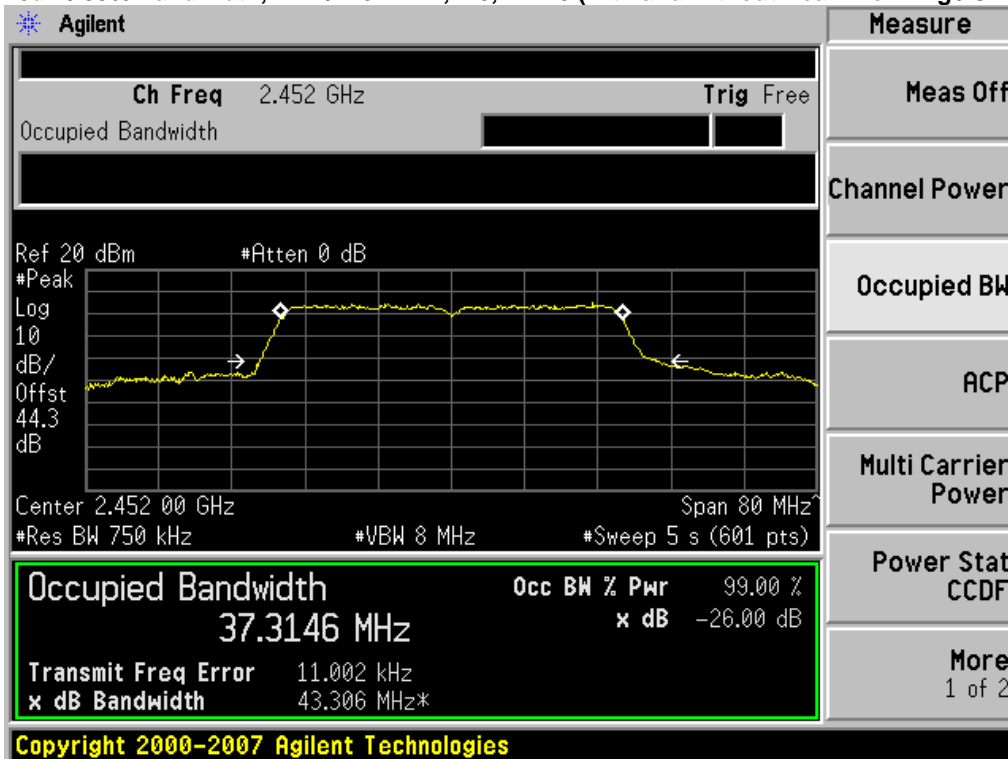



Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 6dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

| | |
|---|---|
| Enable "Channel Power" function of analyzer | |
| Center Frequency: | Frequency from table below |
| Span: | 20 MHz (must be greater than 26dB bandwidth, adjust as necessary) |
| Ref Level Offset: | Correct for attenuator and cable loss. |
| Reference Level: | 20 dBm |
| Attenuation: | 20 dB |
| Sweep Time: | 100ms, Single sweep |
| Resolution Bandwidth: | 1 MHz |
| Video Bandwidth: | 3 MHz |
| Detector: | Sample |
| Trace: | Trace Average 100 traces in Power Averaging Mode |
| Integration BW: | =26 dB BW from 26 dB Bandwidth Data |

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.




| Frequency (MHz) | Operating Mode | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Peak Power (dBm) | Tx 2 Peak Power (dBm) | Tx 3 Peak Power (dBm) | Tx 4 Peak Power (dBm) | Total Tx Channel Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|--------------------------------------|----------|-------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|-------------|-------------|
| 2412 | Legacy CCK, 1 to 11 Mbps | 4 | 6 | 15.2 | 15.7 | 15.5 | 15.8 | 21.6 | 30 | 8.4 |
| | Non HT-20, 6 to 54 Mbps | 4 | 6 | 9.4 | 9.7 | 9.2 | 9.8 | 15.6 | 30 | 14.4 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 4 | 12 | 6.8 | 6.7 | 6.6 | 7.0 | 12.8 | 24 | 11.2 |
| | HT-20, M0 to M23 | 4 | 6 | 8.2 | 8.6 | 8.2 | 8.1 | 14.3 | 30 | 15.7 |
| | HT-20 STBC, M0 to M7 | 4 | 6 | 8.2 | 8.6 | 8.2 | 8.1 | 14.3 | 30 | 15.7 |
| | HT-20 Beam Forming, M0 to M7 | 4 | 12 | 8.2 | 8.6 | 8.2 | 8.1 | 14.3 | 24 | 9.7 |
| | HT-20 Beam Forming, M8 to M15 | 4 | 9 | 10.6 | 11.0 | 10.5 | 10.9 | 16.8 | 27 | 10.2 |
| | HT-20 Beam Forming, M16 to M23 | 4 | 7 | 10.6 | 11.0 | 10.5 | 10.9 | 16.8 | 29 | 12.0 |
| 2437 | Legacy CCK, 1 to 11 Mbps | 4 | 6 | 15.0 | 14.7 | 15.3 | 15.7 | 21.2 | 30 | 8.8 |
| | Non HT-20, 6 to 54 Mbps | 4 | 6 | 16.3 | 15.8 | 16.3 | 16.6 | 22.3 | 30 | 7.7 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 4 | 12 | 15.3 | 15.0 | 15.4 | 15.6 | 21.4 | 24 | 2.6 |
| | HT-20, M0 to M23 | 4 | 6 | 16.3 | 15.9 | 16.4 | 16.6 | 22.3 | 30 | 7.7 |
| | HT-20 STBC, M0 to M7 | 4 | 6 | 16.3 | 15.9 | 16.4 | 16.6 | 22.3 | 30 | 7.7 |
| | HT-20 Beam Forming, M0 to M7 | 4 | 12 | 15.2 | 14.8 | 15.2 | 15.5 | 21.2 | 24 | 2.8 |
| | HT-20 Beam Forming, M8 to M15 | 4 | 9 | 15.2 | 14.8 | 15.2 | 15.5 | 21.2 | 27 | 5.8 |
| | HT-20 Beam Forming, M16 to M23 | 4 | 7 | 15.2 | 14.8 | 15.2 | 15.5 | 21.2 | 29 | 7.5 |
| 2462 | Legacy CCK, 1 to 11 Mbps | 4 | 6 | 14.8 | 15.0 | 15.9 | 15.4 | 21.3 | 30 | 8.7 |
| | Non HT-20, 6 to 54 Mbps | 4 | 6 | 10.0 | 10.3 | 11.0 | 11.0 | 16.6 | 30 | 13.4 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 4 | 12 | 7.3 | 7.4 | 8.3 | 8.0 | 13.8 | 24 | 10.2 |
| | HT-20, M0 to M23 | 4 | 6 | 9.3 | 9.2 | 10.0 | 9.9 | 15.6 | 30 | 14.4 |
| | HT-20 STBC, M0 to M7 | 4 | 6 | 9.3 | 9.2 | 10.0 | 9.9 | 15.6 | 30 | 14.4 |
| | HT-20 Beam Forming, M0 to M7 | 4 | 12 | 7.2 | 7.3 | 8.2 | 8.3 | 13.8 | 24 | 10.2 |
| | HT-20 Beam Forming, M8 to M15 | 4 | 9 | 10.2 | 10.2 | 11.2 | 11.1 | 16.7 | 27 | 10.3 |
| | HT-20 Beam Forming, M16 to M23 | 4 | 7 | 10.2 | 10.2 | 11.2 | 11.1 | 16.7 | 29 | 12.0 |
| 2412/2432 | Non HT-40 Duplicate, 6-54 Mbps | 4 | 6 | 6.0 | 5.9 | 6.0 | 6.5 | 12.1 | 30 | 17.9 |
| | HT-40, M0 to M23 | 4 | 6 | 7.6 | 7.9 | 7.7 | 8.3 | 13.9 | 30 | 16.1 |
| | HT-40 STBC, M0 to M7 | 4 | 6 | 7.6 | 7.9 | 7.7 | 8.3 | 13.9 | 30 | 16.1 |
| | HT-40 Beam Forming, M0 to M7 | 4 | 12 | 4.5 | 4.8 | 4.9 | 5.4 | 10.9 | 24 | 13.0 |
| | HT-40 Beam Forming, M8 to M15 | 4 | 9 | 7.6 | 7.9 | 7.7 | 8.3 | 13.9 | 27 | 13.1 |
| | HT-40 Beam Forming, M16 to M23 | 4 | 7 | 7.6 | 7.9 | 7.7 | 8.3 | 13.9 | 29 | 14.8 |
| 2427/2447 | Non HT-40 Duplicate, 6-54 Mbps | 4 | 6 | 9.5 | 9.8 | 9.6 | 10.2 | 15.8 | 30 | 14.2 |
| | HT-40, M0 to M23 | 4 | 6 | 11.2 | 11.0 | 11.3 | 11.6 | 17.3 | 30 | 12.7 |
| | HT-40 STBC, M0 to M7 | 4 | 6 | 11.2 | 11.0 | 11.3 | 11.6 | 17.3 | 30 | 12.7 |
| | HT-40 Beam Forming, M0 to M7 | 4 | 12 | 14.0 | 13.9 | 14.1 | 14.2 | 20.1 | 24 | 3.9 |
| | HT-40 Beam Forming, M8 to M15 | 4 | 9 | 14.0 | 13.9 | 14.1 | 14.2 | 20.1 | 27 | 6.9 |
| | HT-40 Beam Forming, M16 to M23 | 4 | 7 | 14.0 | 13.9 | 14.1 | 14.2 | 20.1 | 29 | 8.7 |
| 2442/2462 | Non HT-40 Duplicate, 6-54 Mbps | 4 | 6 | 4.5 | 4.7 | 5.1 | 5.3 | 10.9 | 30 | 19.1 |
| | HT-40, M0 to M23 | 4 | 6 | 6.1 | 6.5 | 7.0 | 7.0 | 12.7 | 30 | 17.3 |
| | HT-40 STBC, M0 to M7 | 4 | 6 | 6.1 | 6.5 | 7.0 | 7.0 | 12.7 | 30 | 17.3 |
| | HT-40 Beam Forming, M0 to M7 | 4 | 12 | 4.4 | 4.5 | 5.0 | 4.9 | 10.7 | 24 | 13.3 |
| | HT-40 Beam Forming, M8 to M15 | 4 | 9 | 7.1 | 4.5 | 5.0 | 4.9 | 11.5 | 27 | 15.5 |
| | HT-40 Beam Forming, M16 to M23 | 4 | 7 | 7.1 | 4.5 | 5.0 | 4.9 | 11.5 | 29 | 17.2 |

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.




Peak Output Power, 2412 MHz, 11 Mbps, Legacy CCK

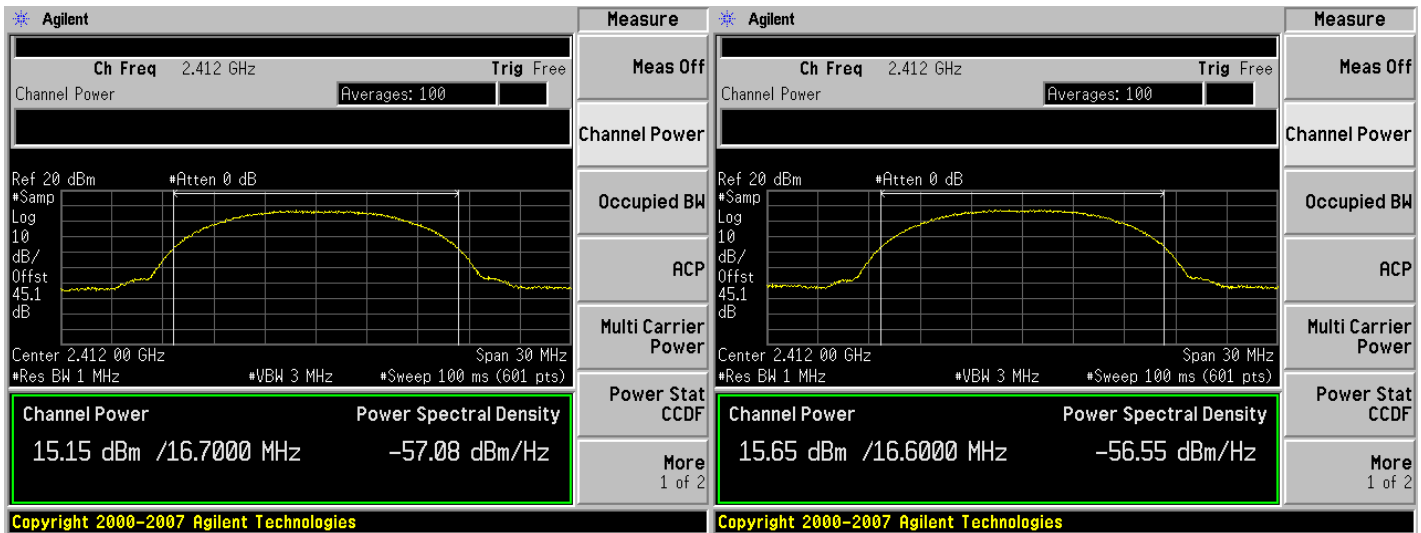

Antenna A

Antenna B

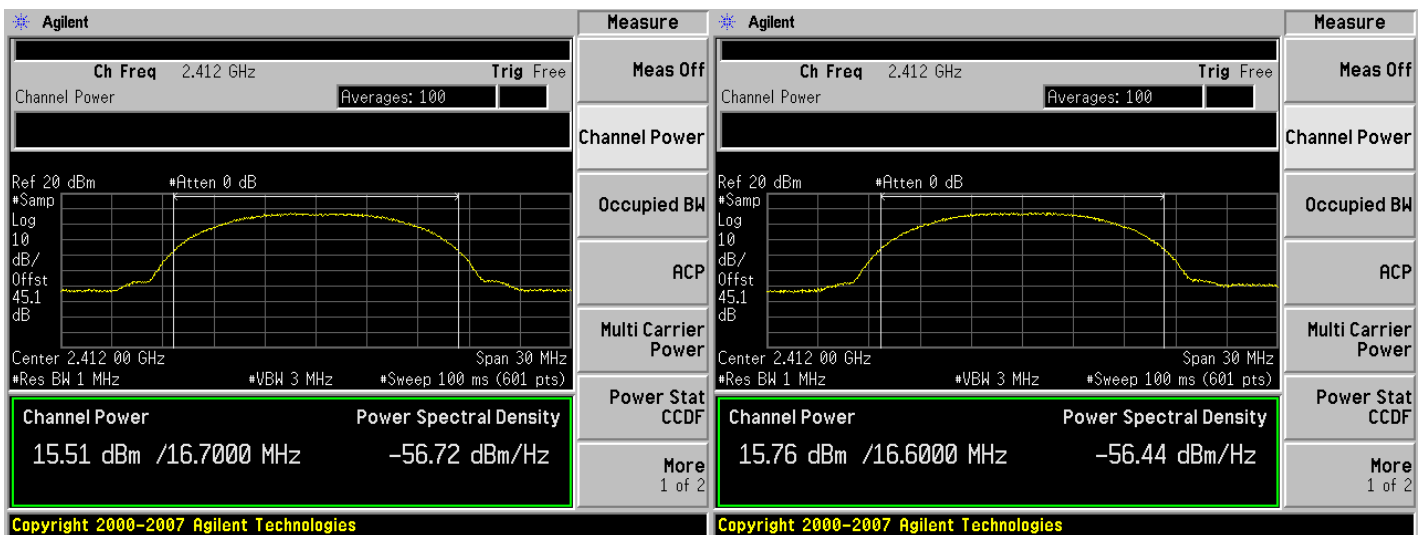


Antenna C

Antenna D



Peak Output Power, 2412 MHz, 6 Mbps, Non HT-20

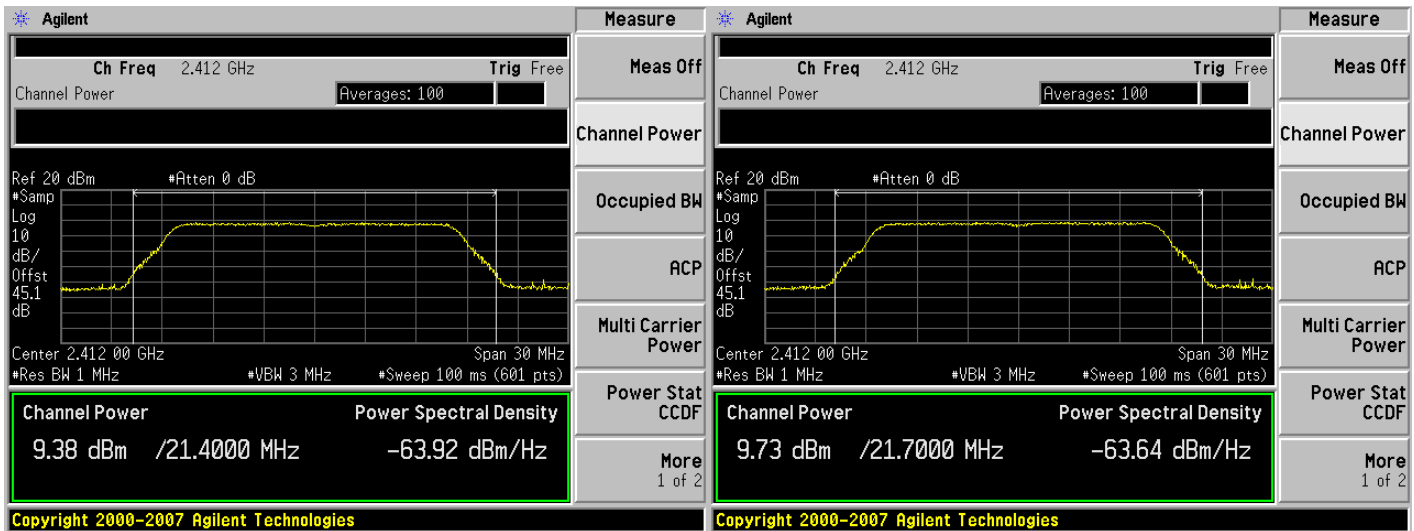

Antenna A

Antenna B




Antenna C

Antenna D




Peak Output Power, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming

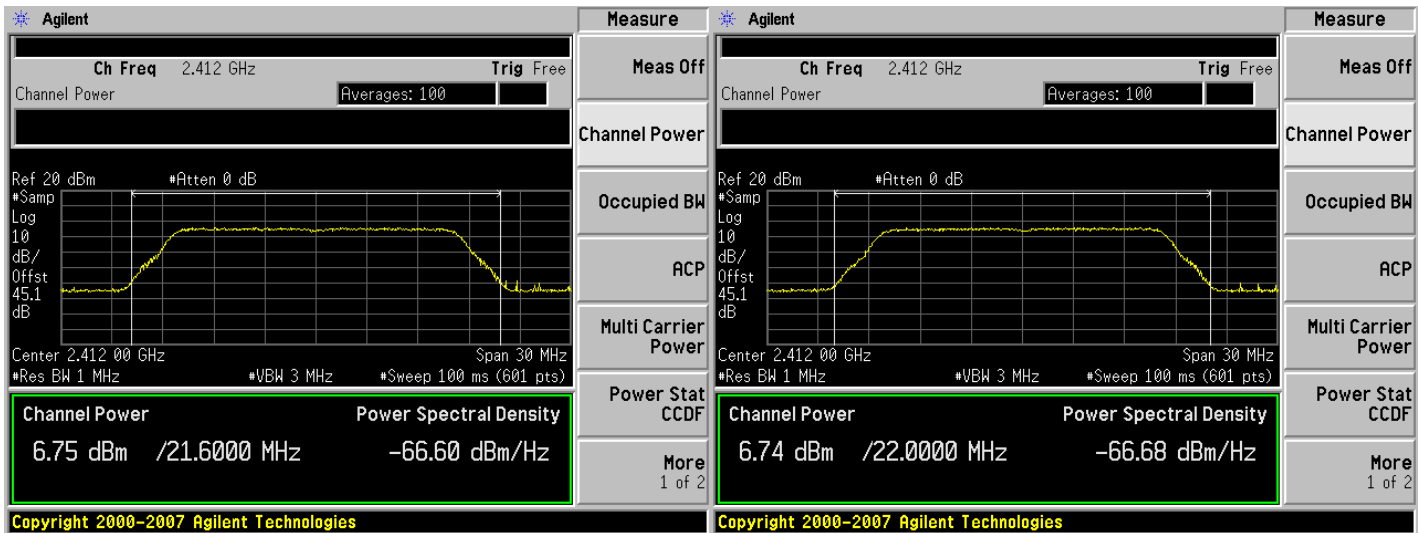

Antenna A

Antenna B

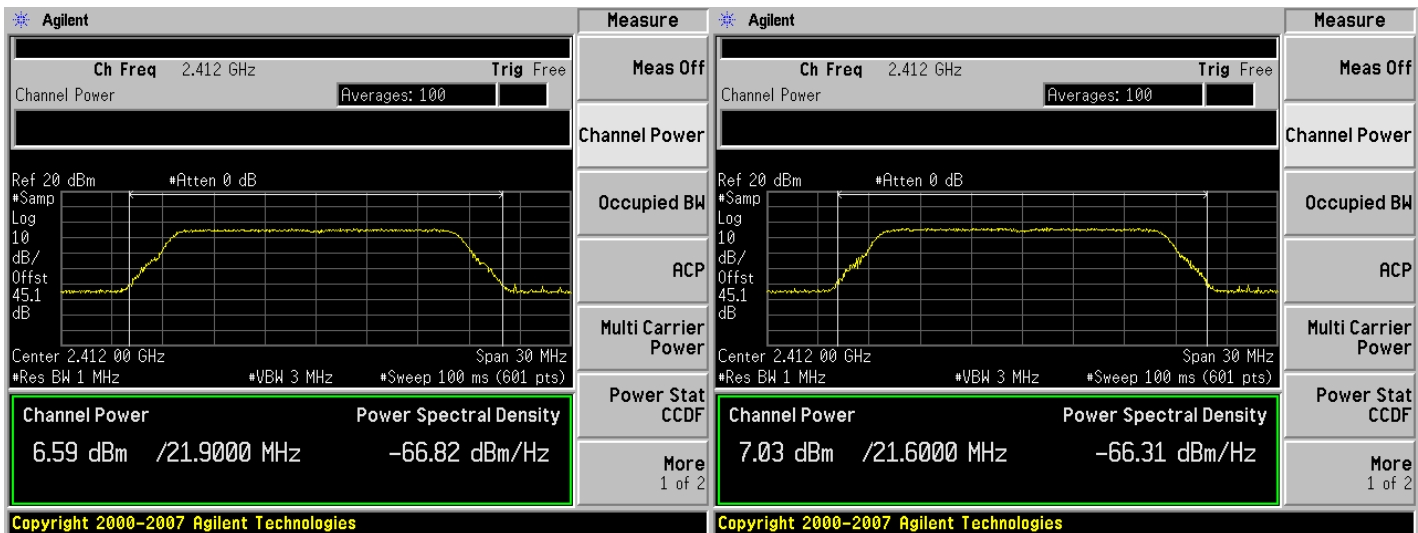


Antenna C

Antenna D




Peak Output Power, 2412 MHz, m0, HT20 with and without STBC

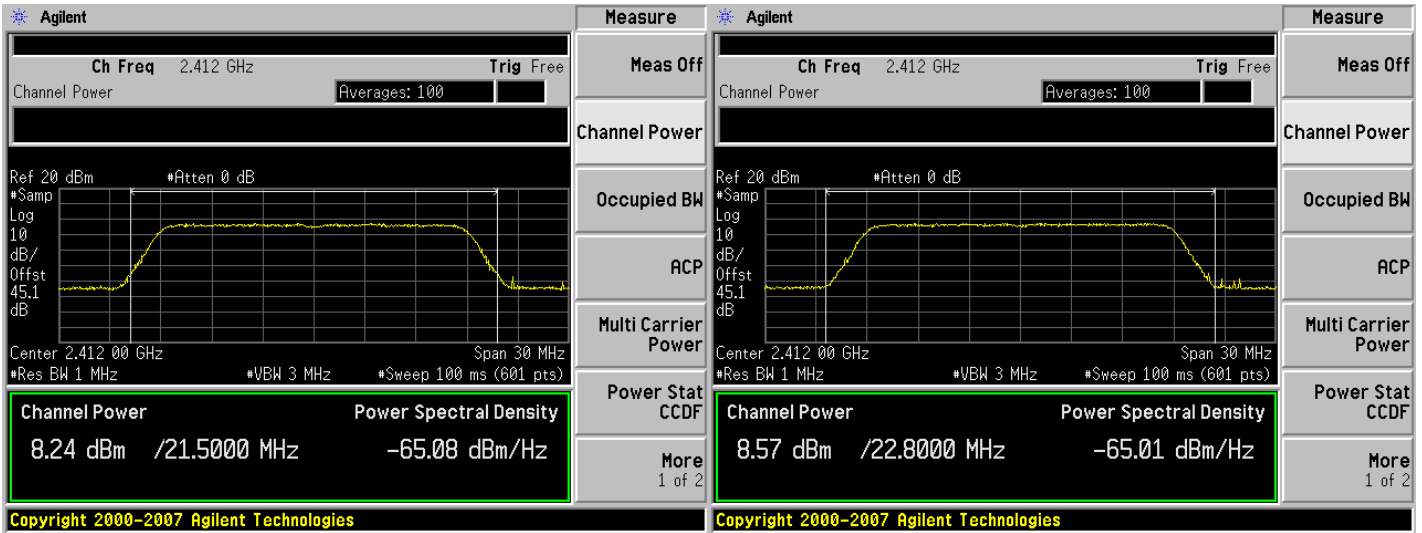

Antenna A

Antenna B

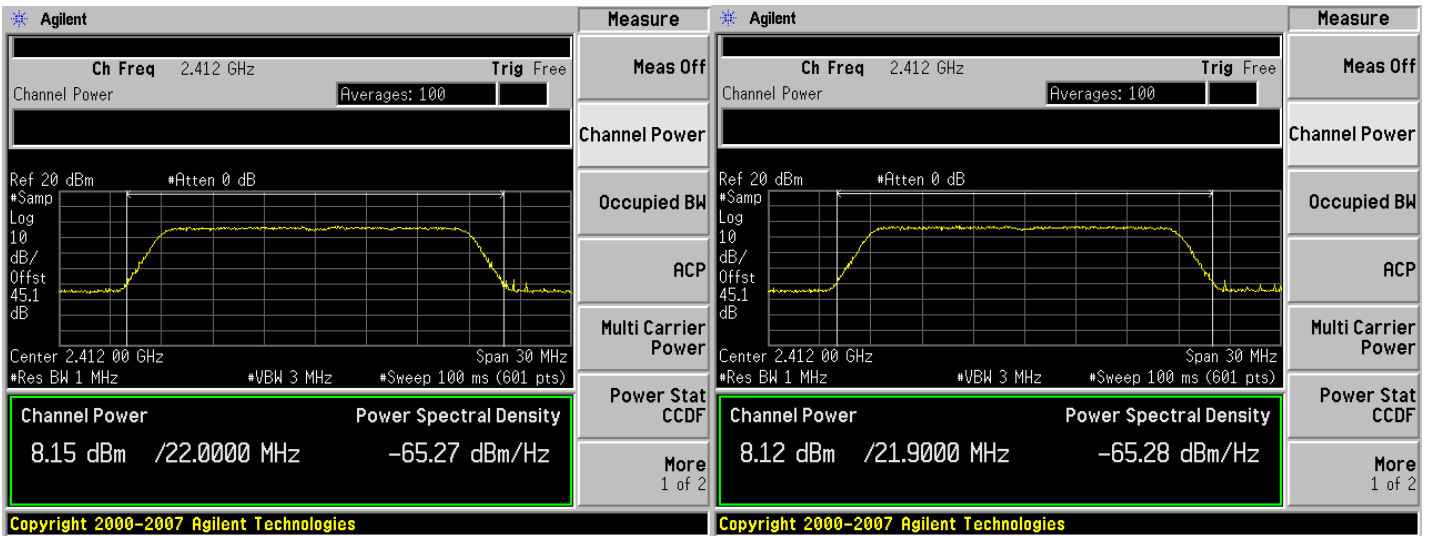


Antenna C

Antenna D




Peak Output Power, 2412 MHz, m0, HT20 Beam Forming

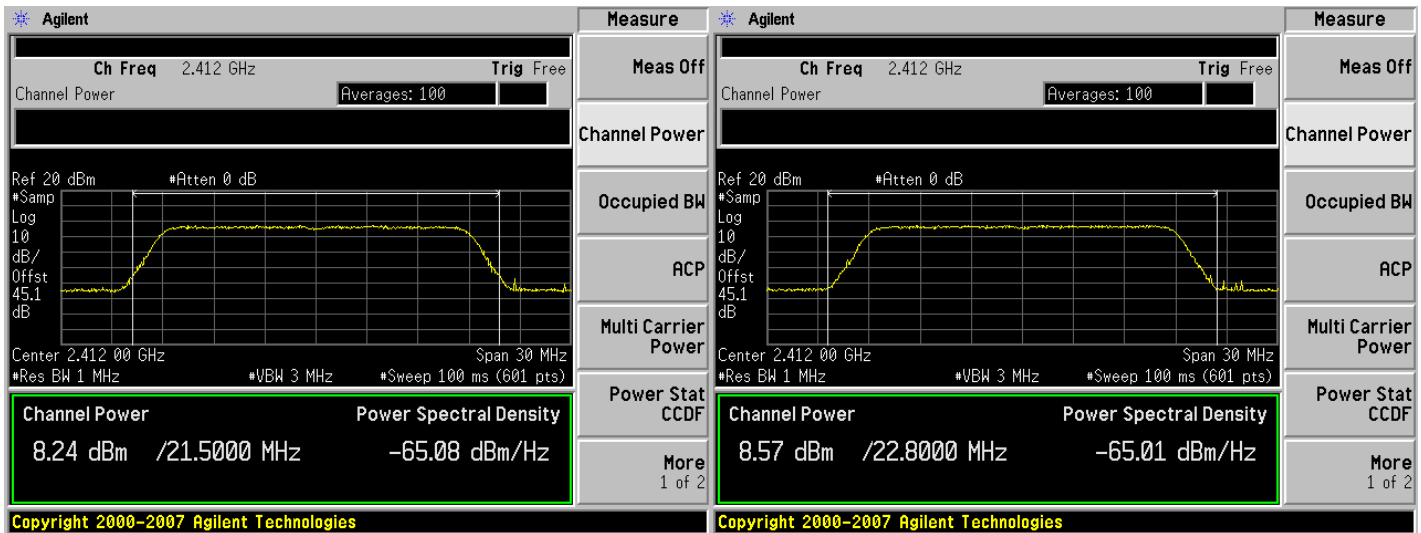

Antenna A

Antenna B

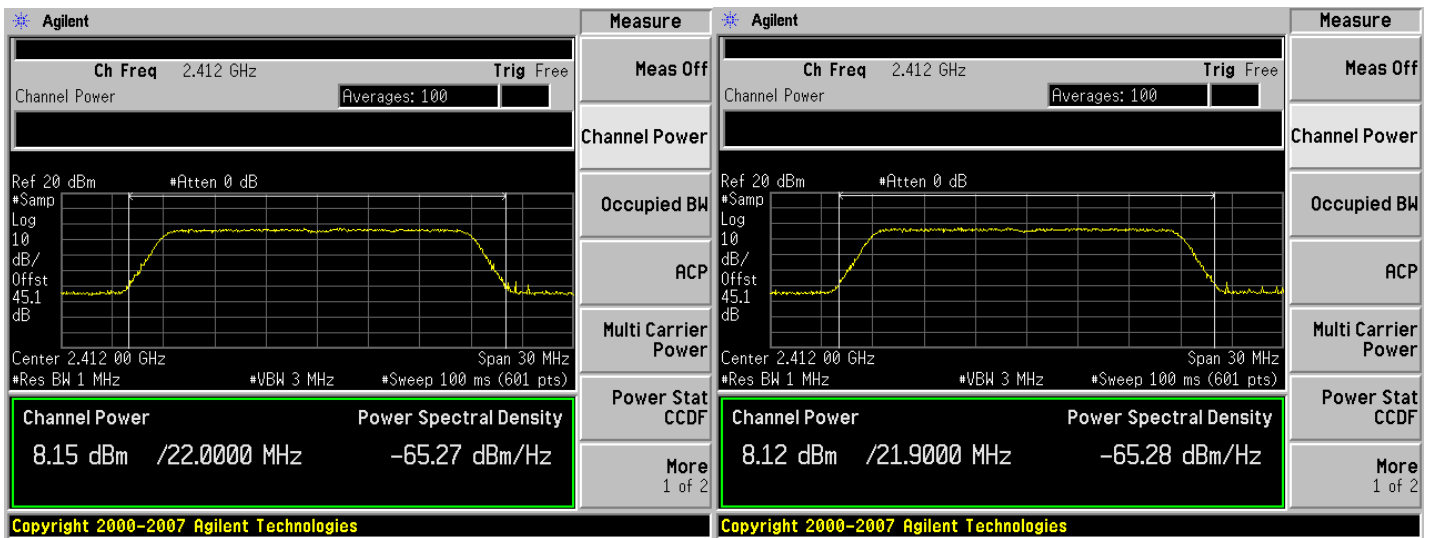


Antenna C

Antenna D




Peak Output Power, 2412 MHz, m8/m16, HT20 Beam Forming

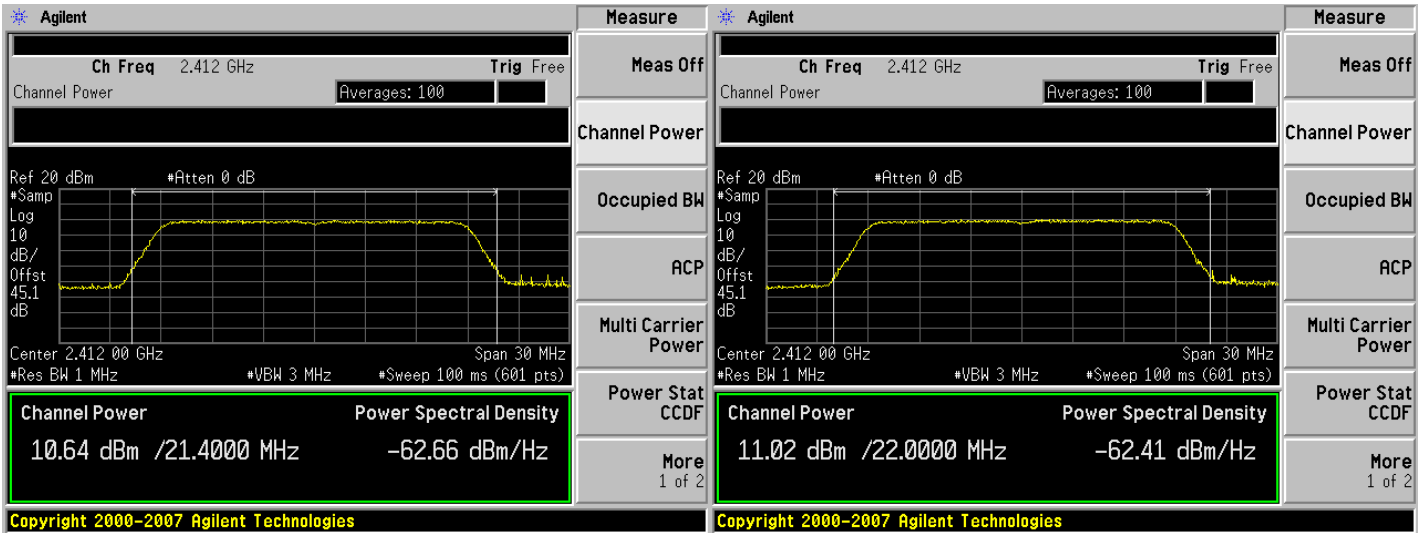

Antenna A

Antenna B

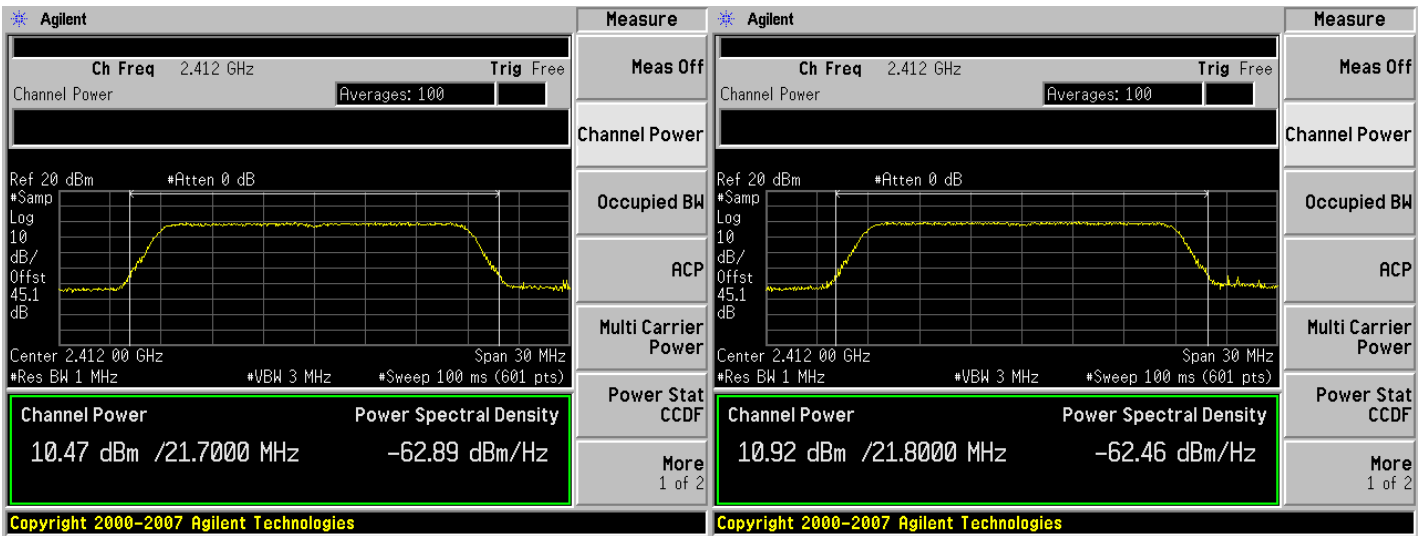


Antenna C

Antenna D




Peak Output Power, 2437 MHz, 11 Mbps, Legacy CCK

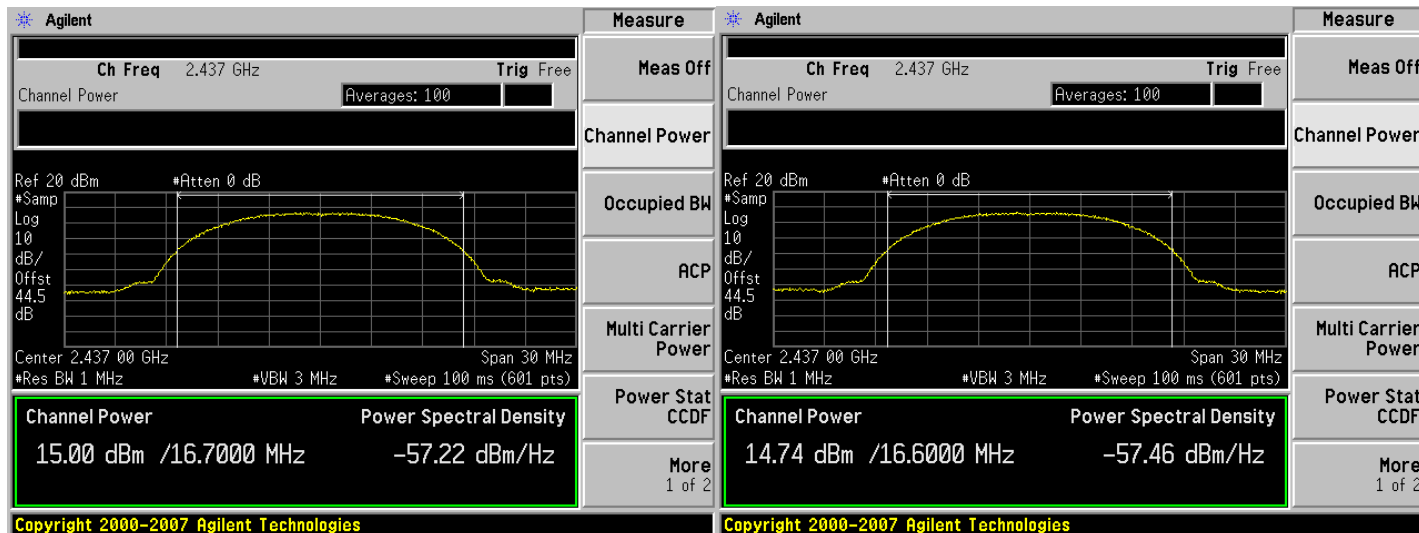

Antenna A

Antenna B

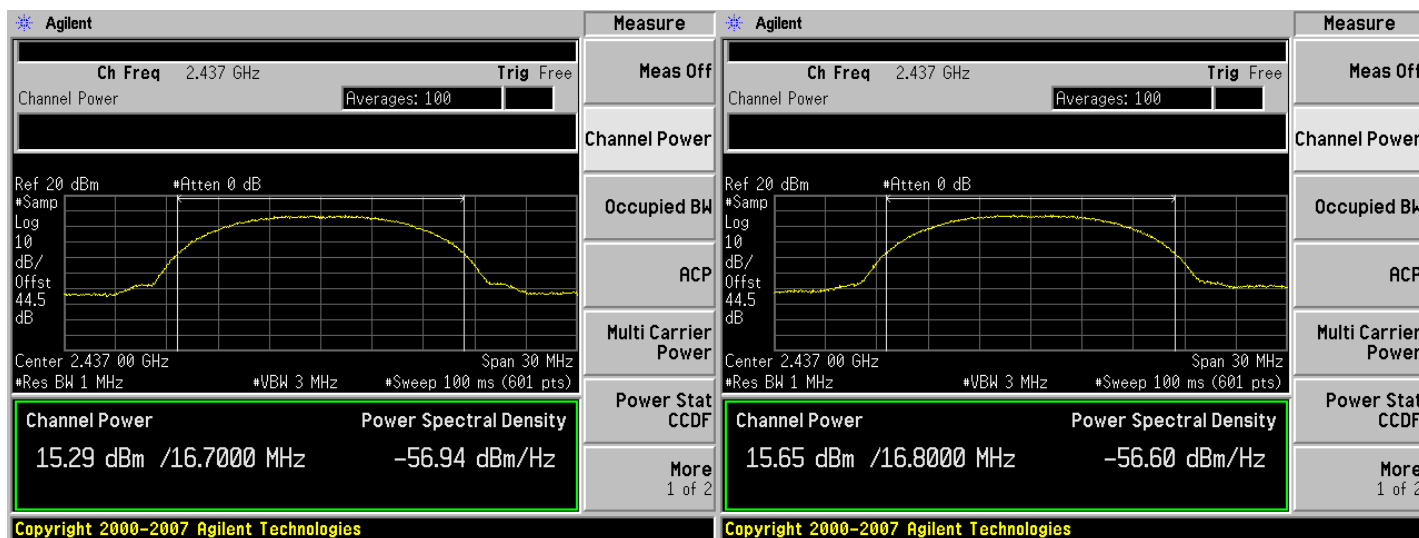


Antenna C

Antenna D




Peak Output Power, 2437 MHz, 6 Mbps, Non HT-20

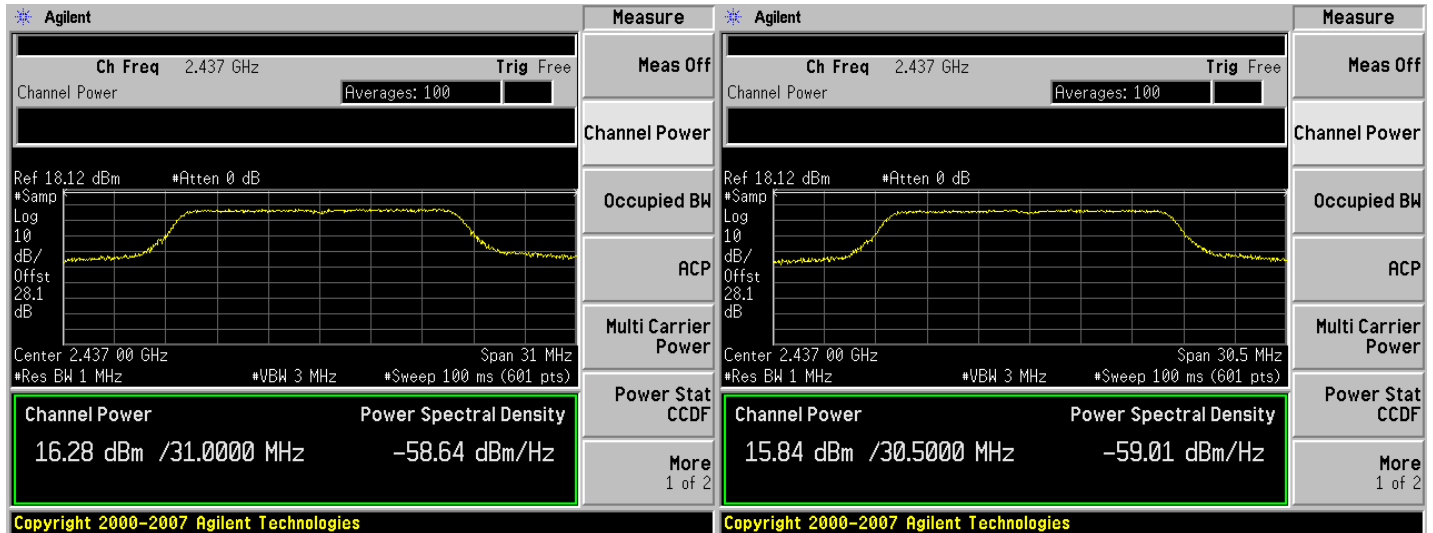

Antenna A

Antenna B

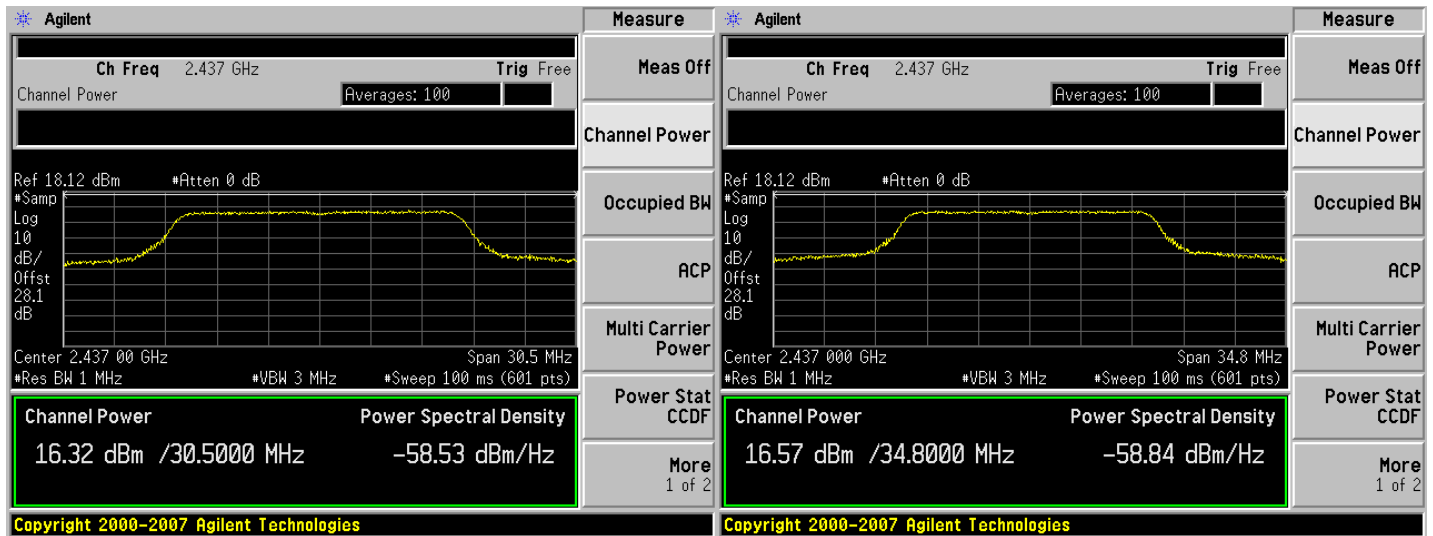


Antenna C

Antenna D




Peak Output Power, 2437 MHz, 6 Mbps, Non HT-20 Beam Forming

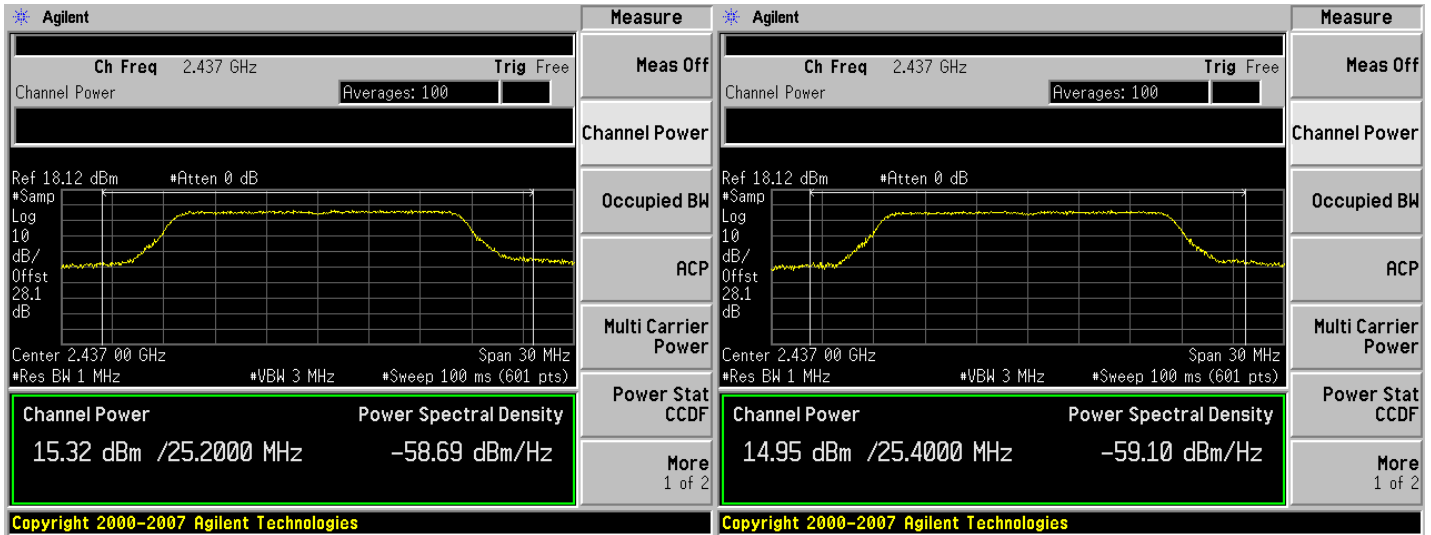

Antenna A

Antenna B

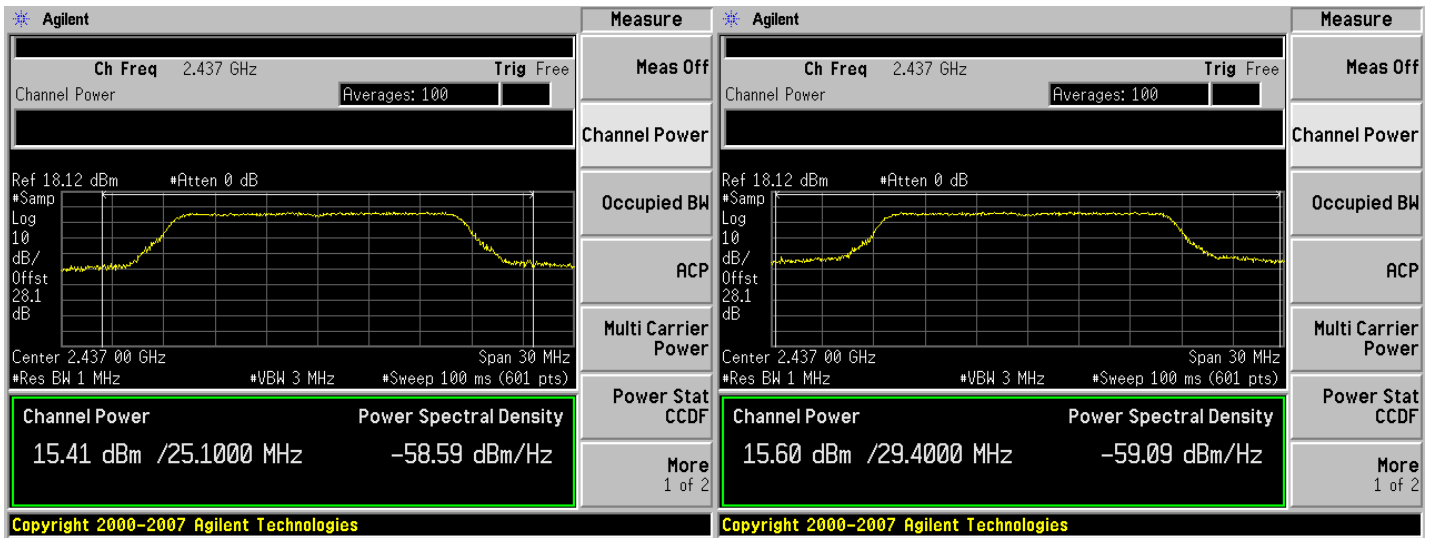


Antenna C

Antenna D




Peak Output Power, 2437 MHz, m0, HT20 with and without STBC

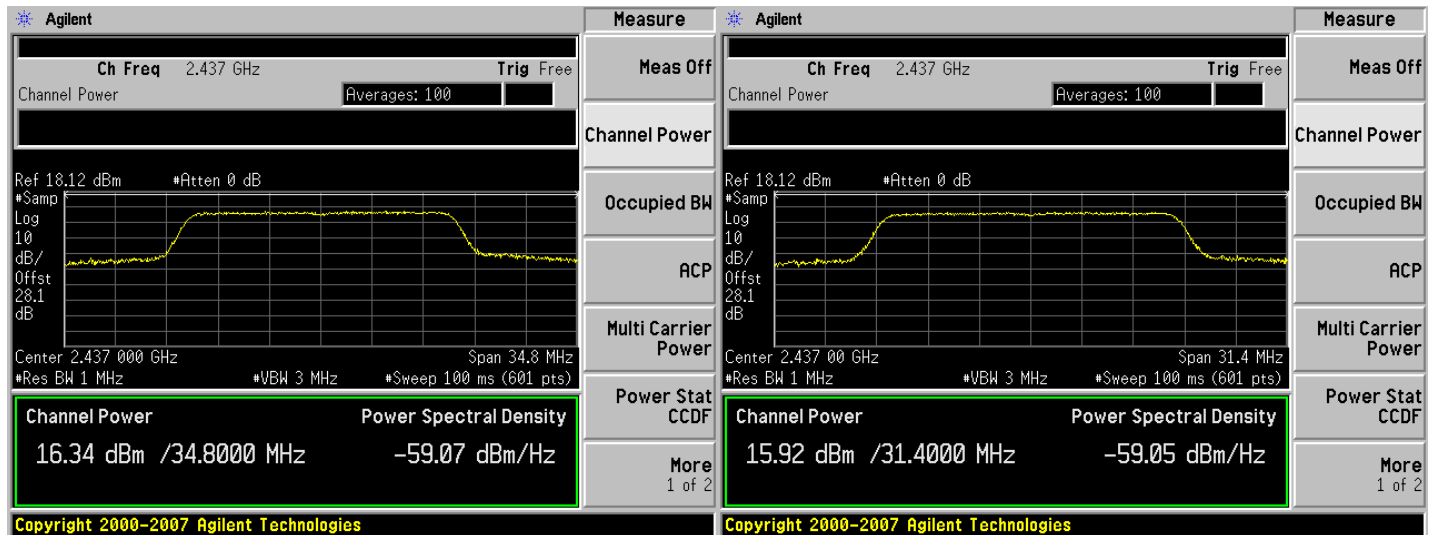

Antenna A

Antenna B

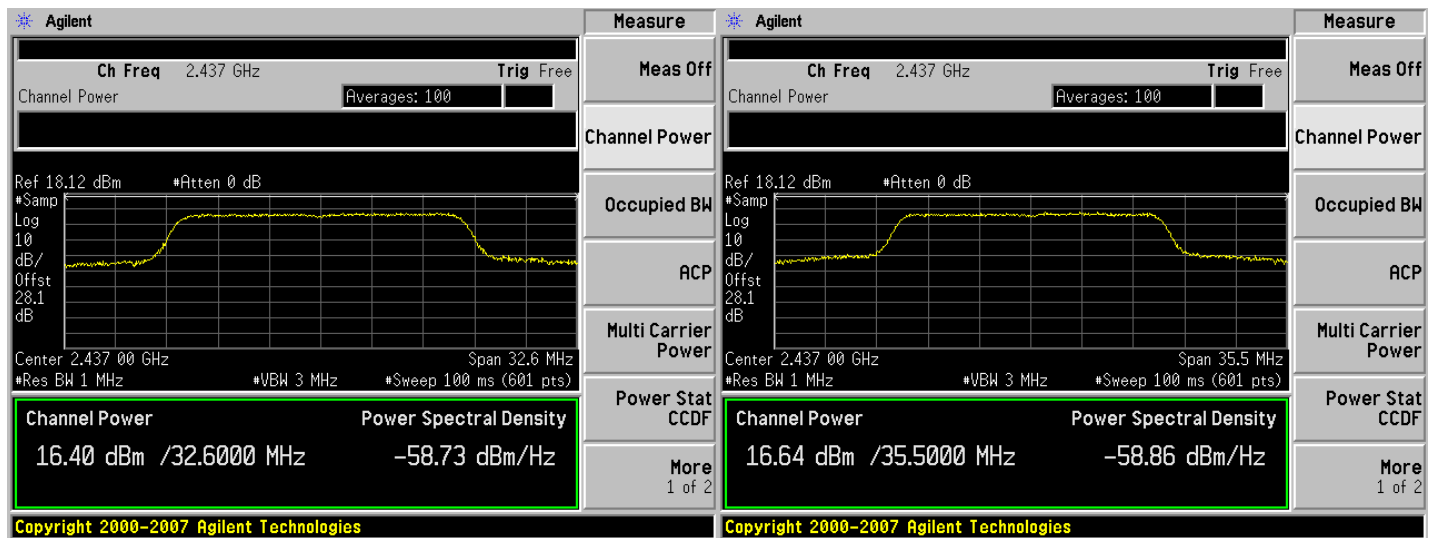


Antenna C

Antenna D




Peak Output Power, 2437 MHz, m0/m8/m16, HT20 Beam Forming

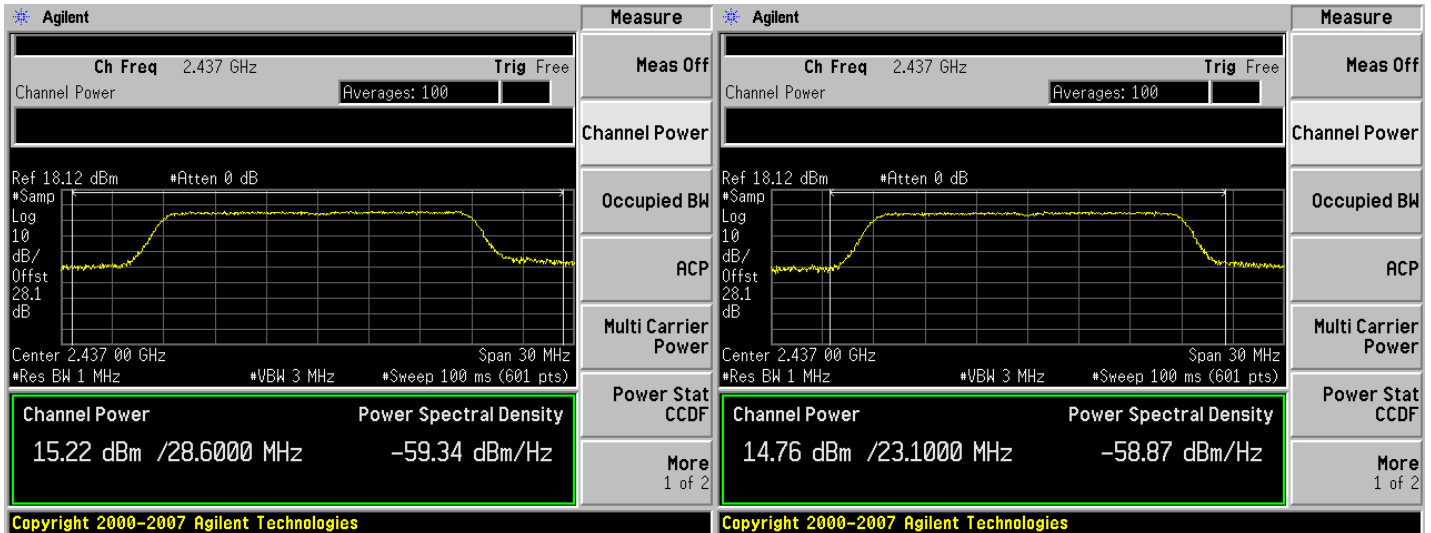

Antenna A

Antenna B

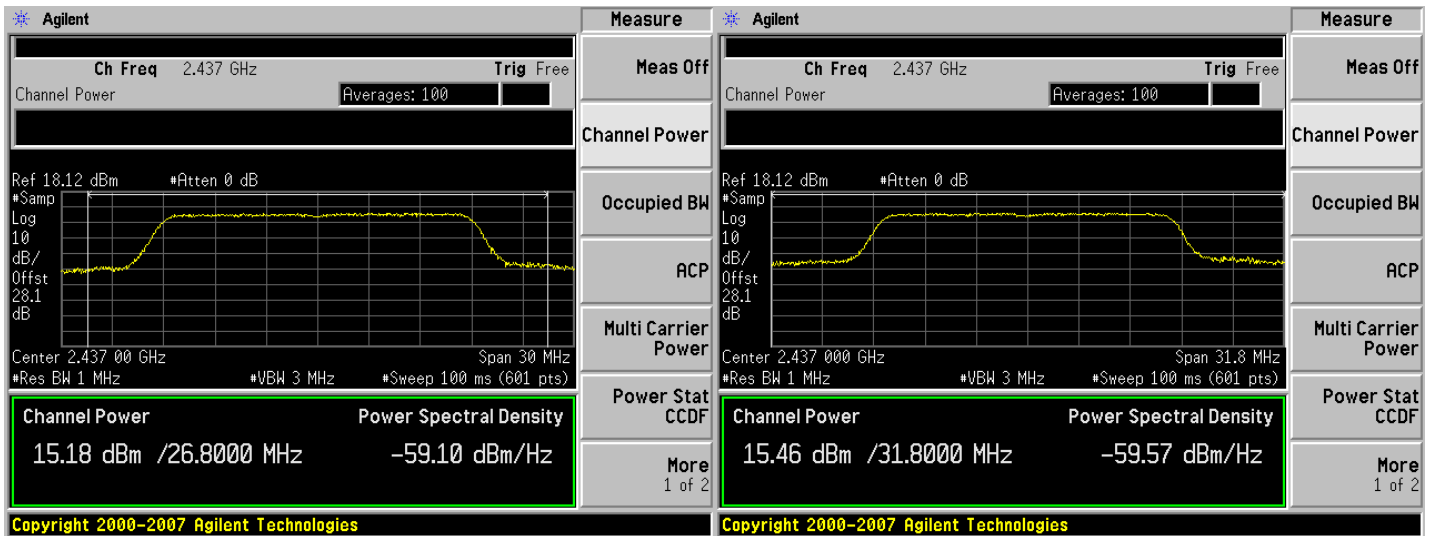


Antenna C

Antenna D



Peak Output Power, 2462 MHz, 11 Mbps, Legacy CCK

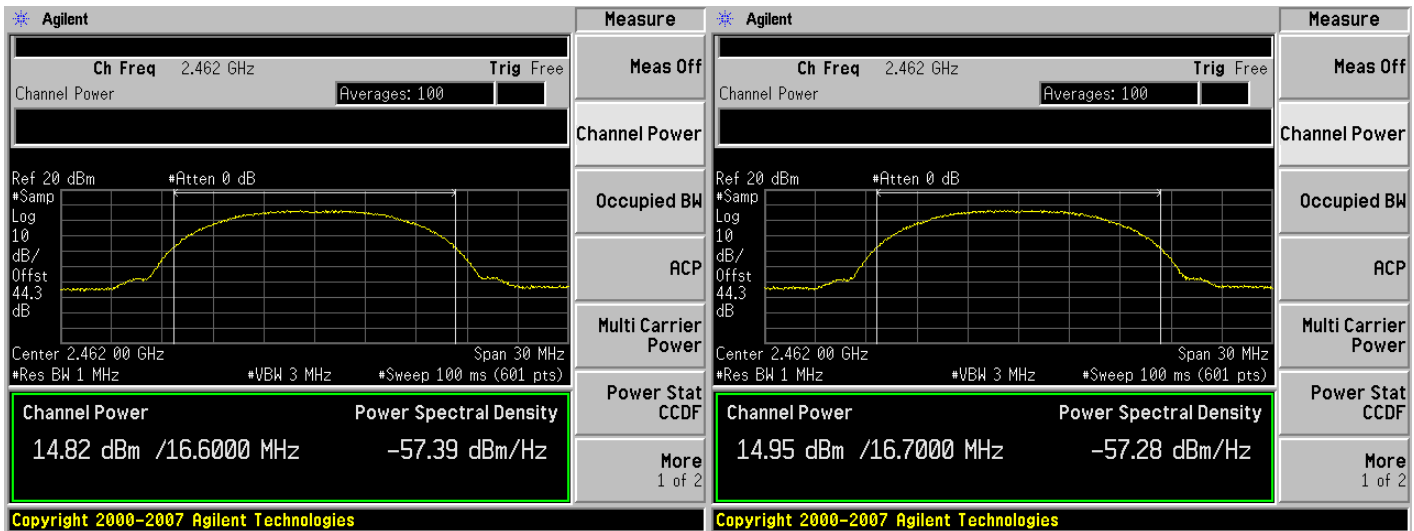

Antenna A

Antenna B




Antenna C

Antenna D




Peak Output Power, 2462 MHz, 6 Mbps, Non HT-20

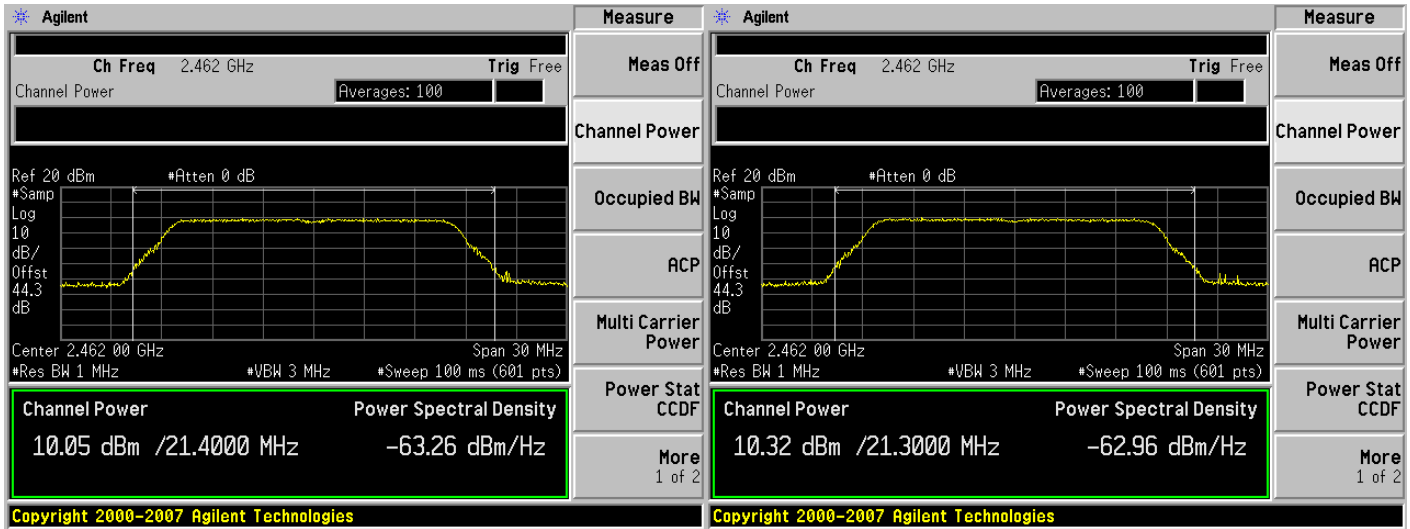

Antenna A

Antenna B

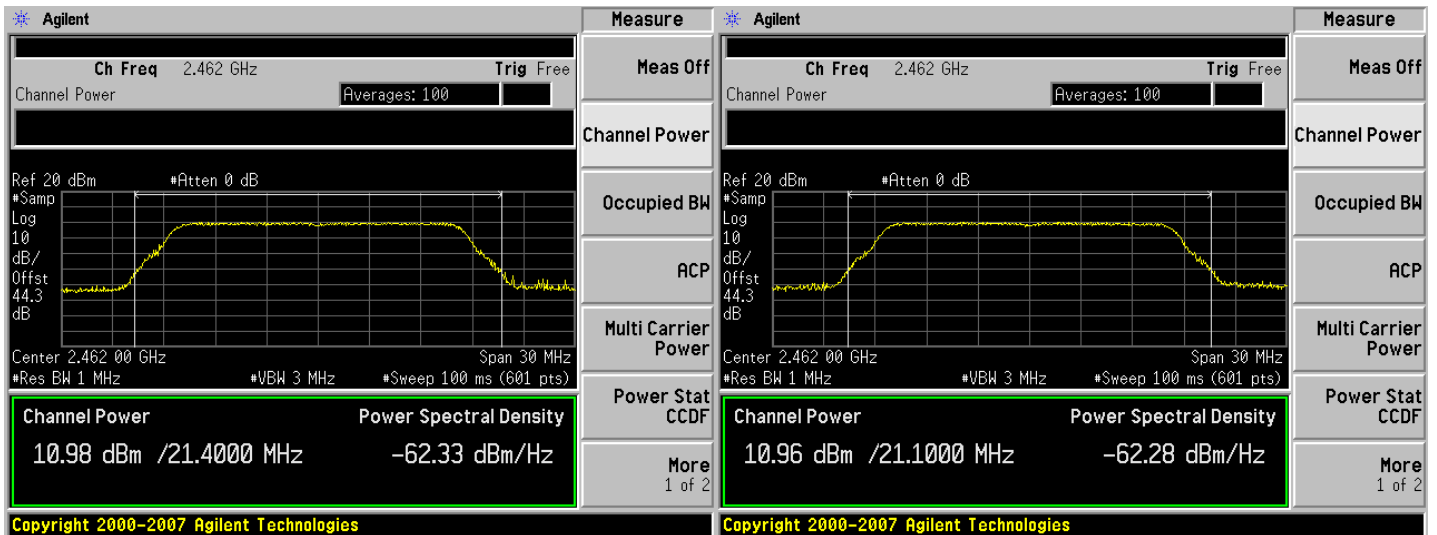


Antenna C

Antenna D




Peak Output Power, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming

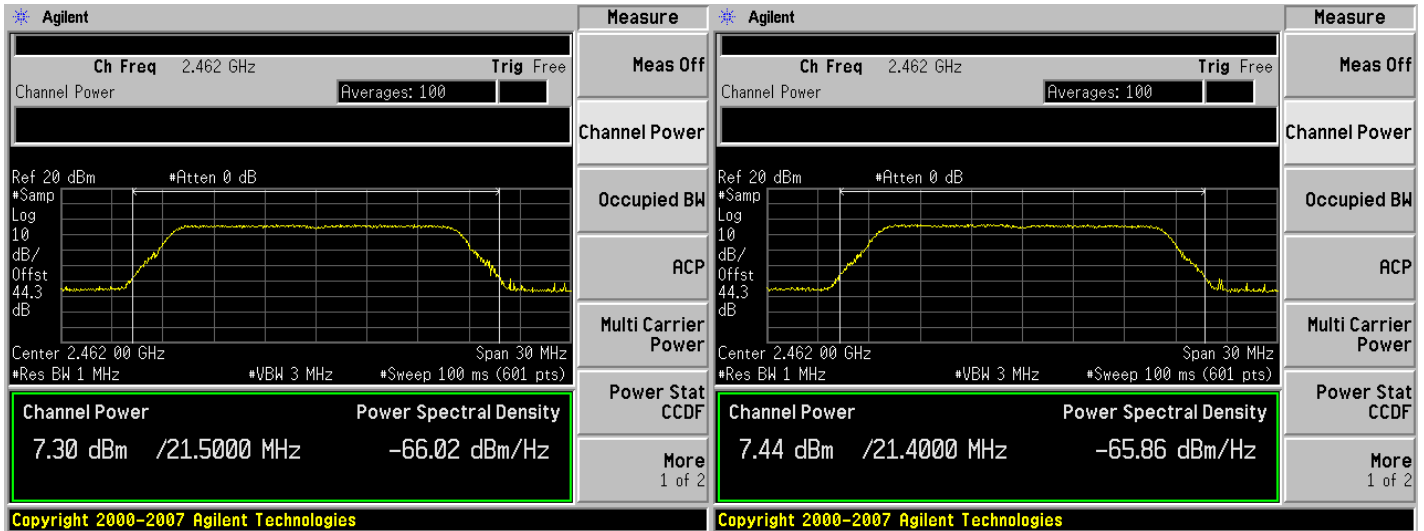

Antenna A

Antenna B

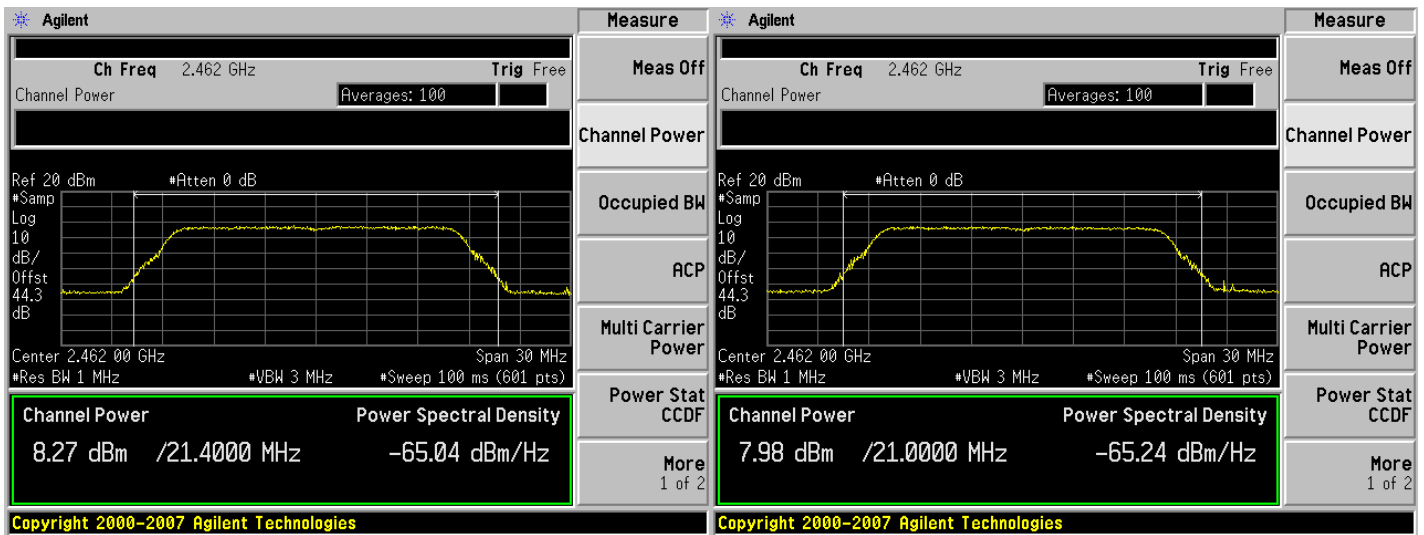


Antenna C

Antenna D




Peak Output Power, 2462 MHz, m0, HT20 with and without STBC

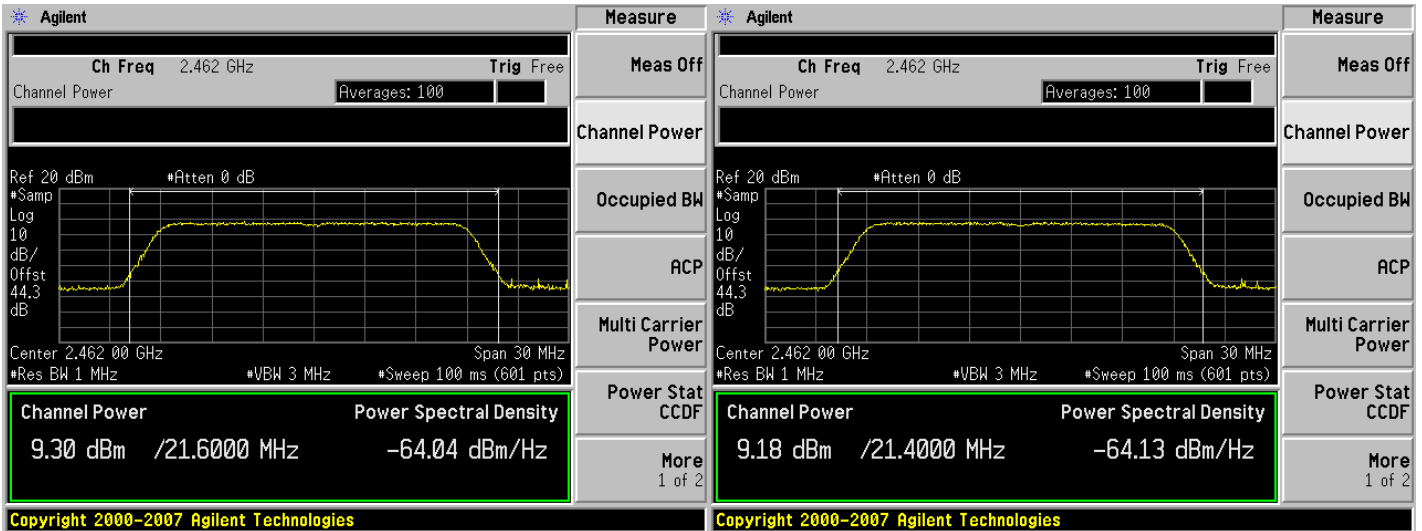

Antenna A

Antenna B

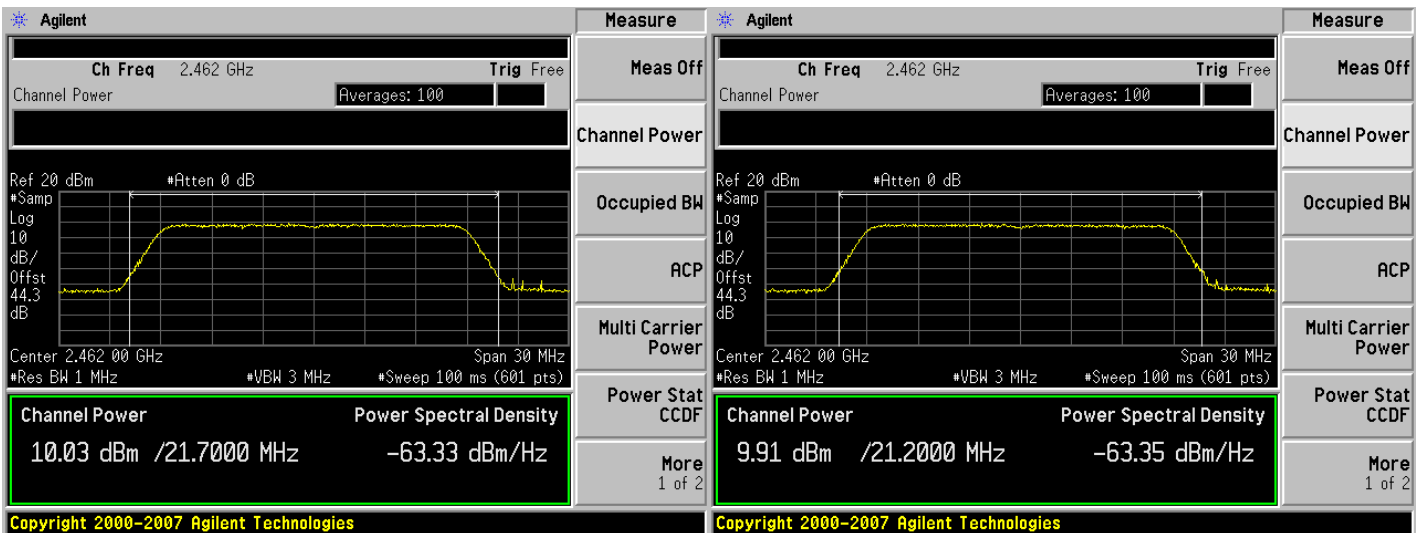


Antenna C

Antenna D




Peak Output Power, 2462 MHz, m0, HT20 Beam Forming

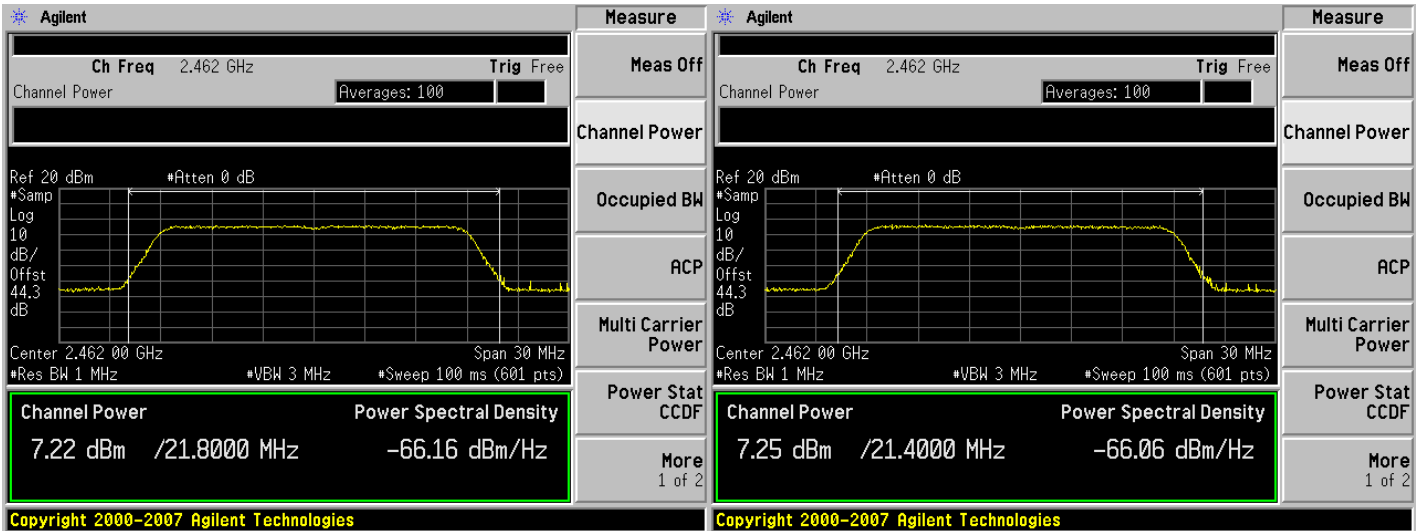

Antenna A

Antenna B

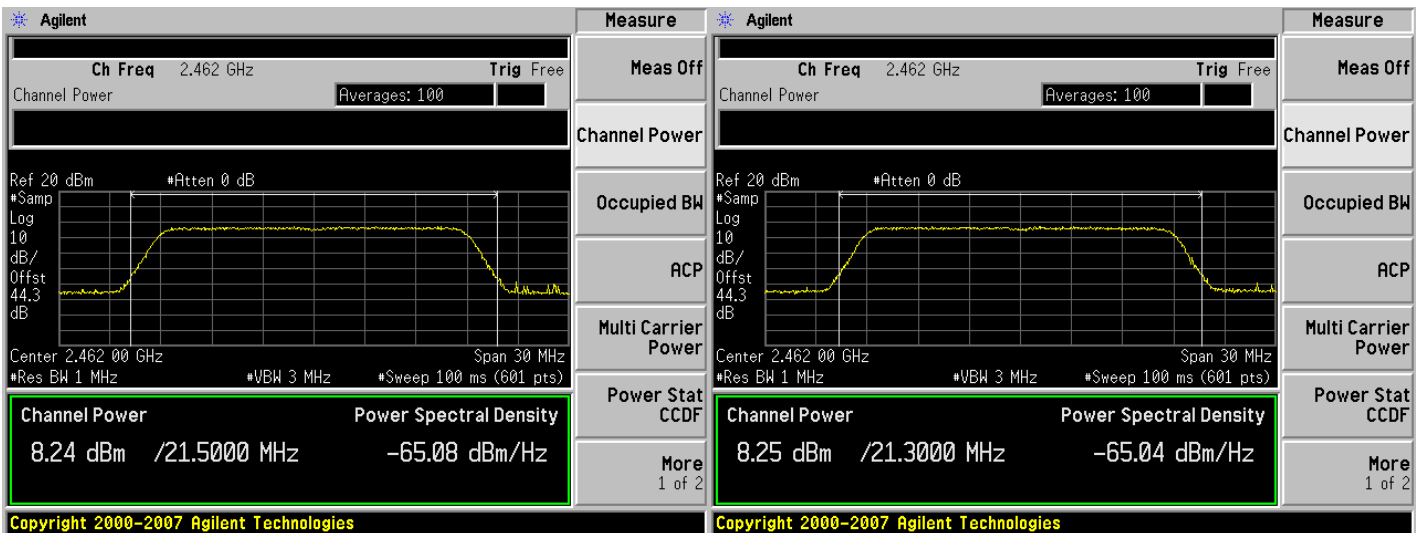


Antenna C

Antenna D




Peak Output Power, 2462 MHz, m8/m16, HT20 Beam Forming

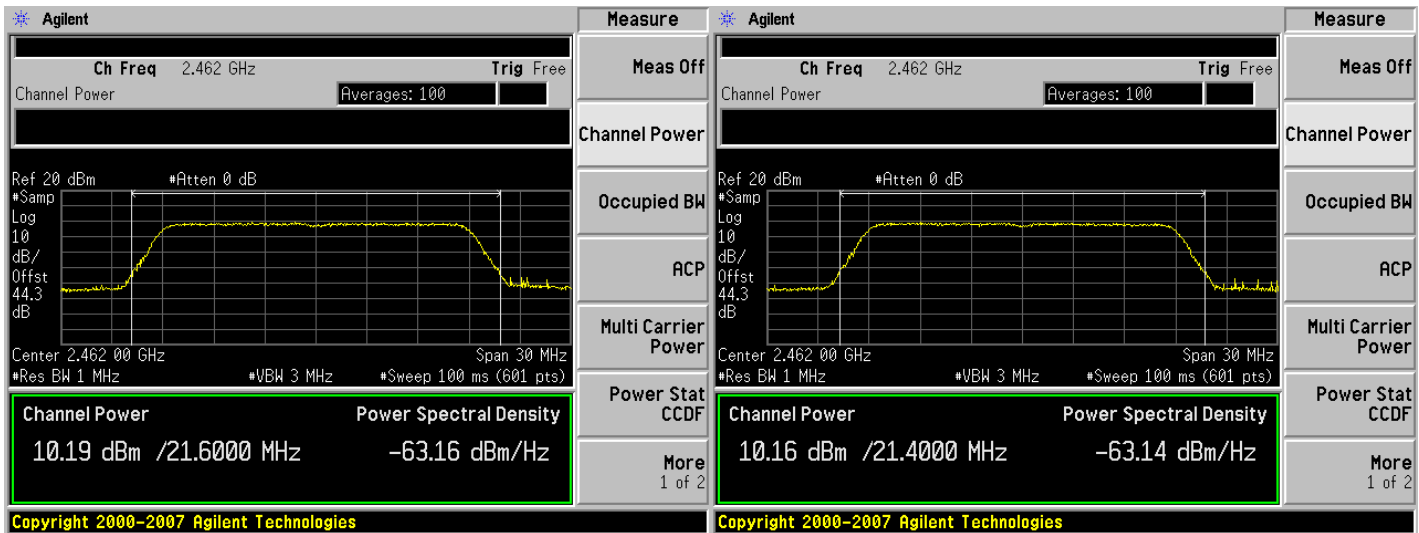

Antenna A

Antenna B

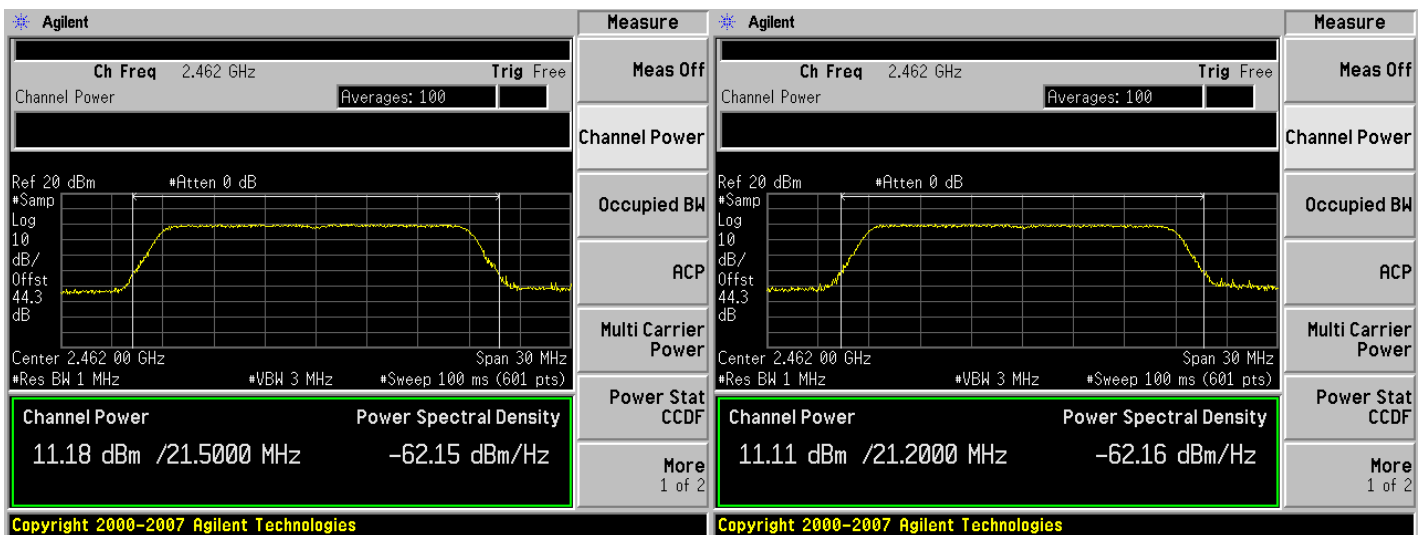


Antenna C

Antenna D




Peak Output Power, 2412/2432 MHz, 6 Mbps, Non-HT40

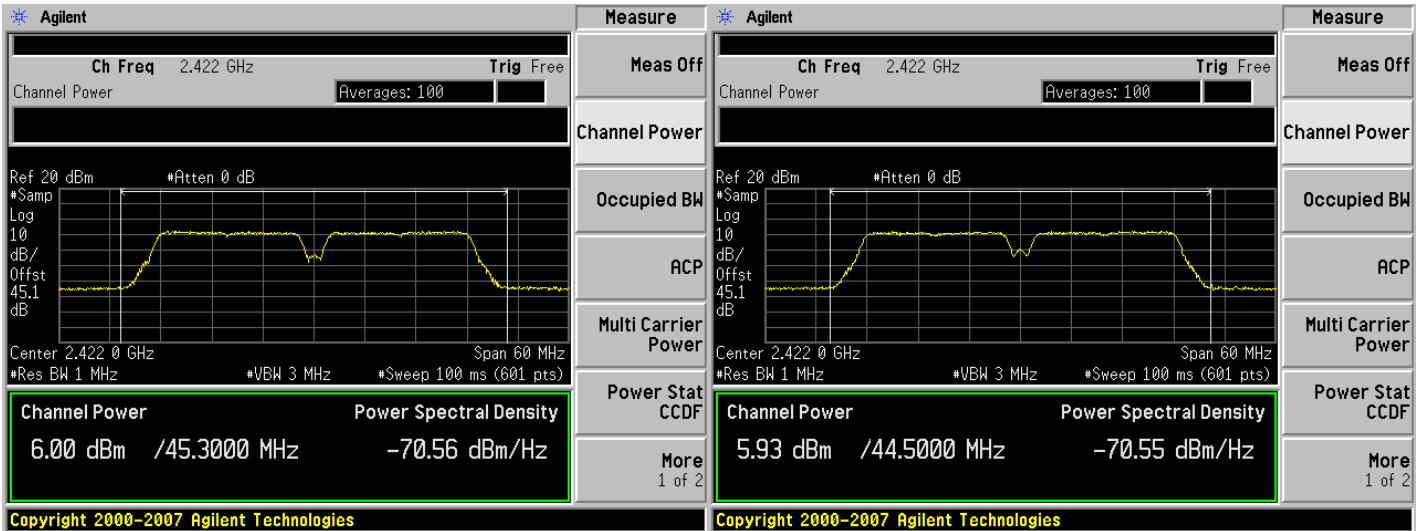

Antenna A

Antenna B

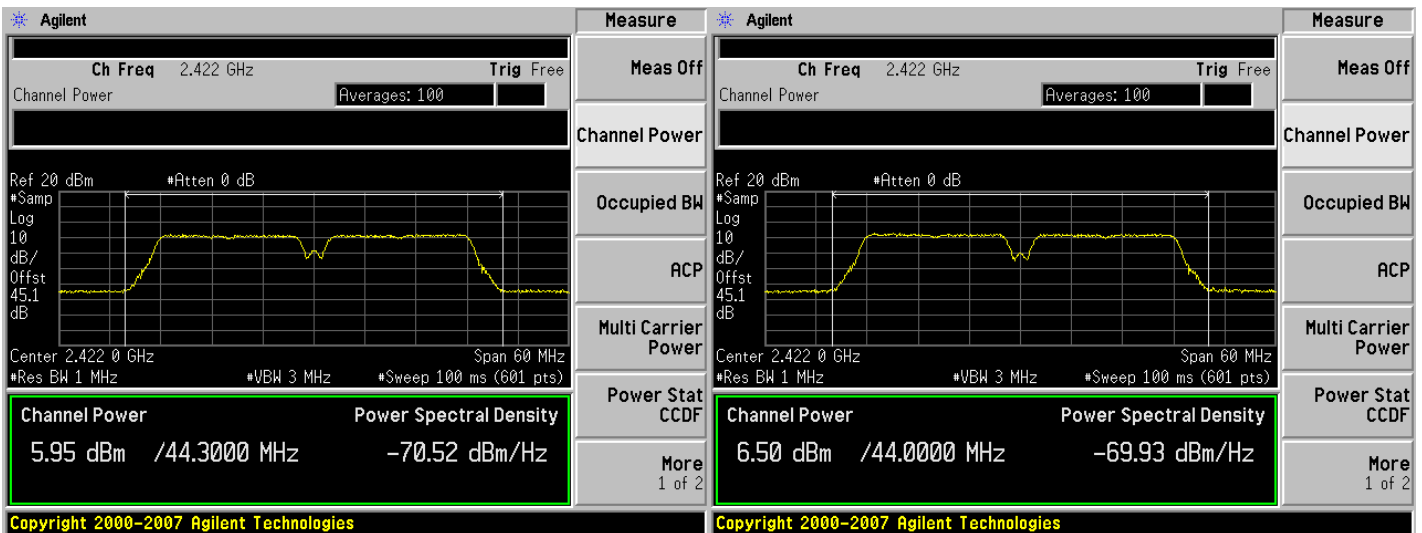


Antenna C

Antenna D




Peak Output Power, 2412/2432 MHz, m0, HT40 with and without STBC, m8/m16 HT40 Beam Forming

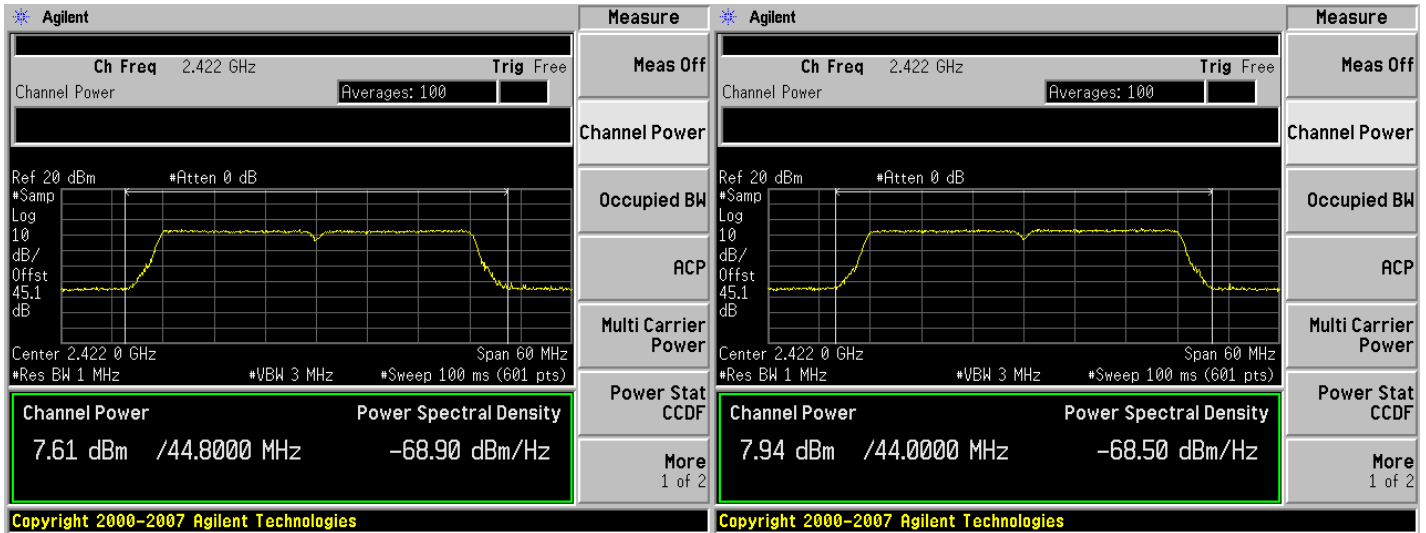

Antenna A

Antenna B

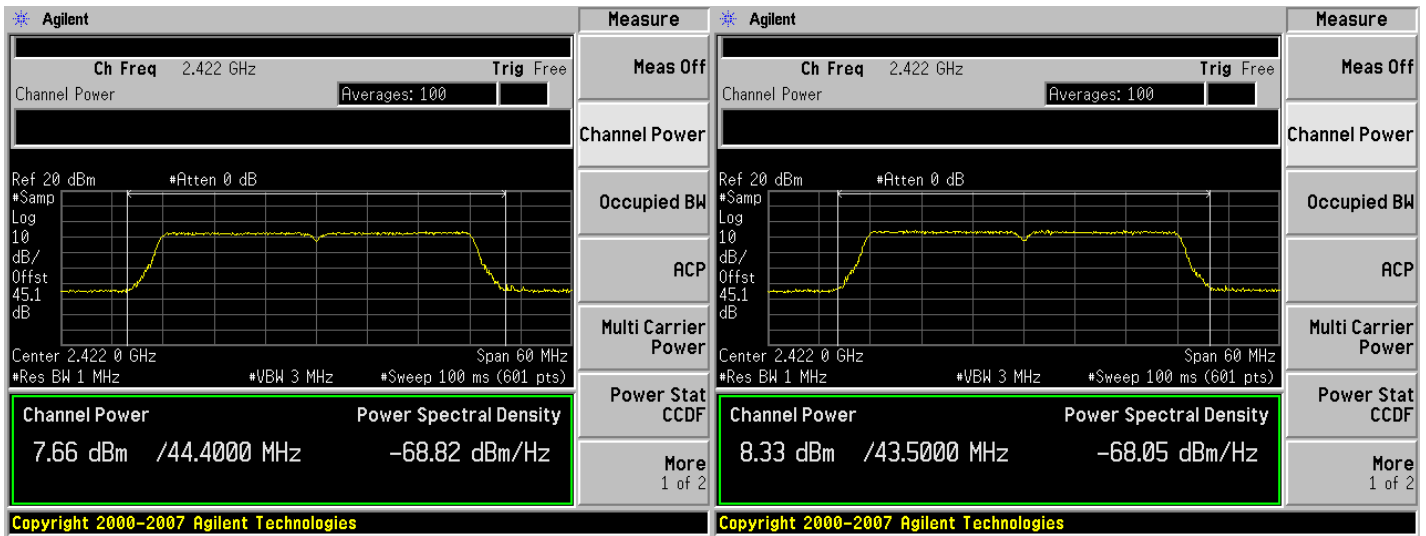


Antenna C

Antenna D




Peak Output Power, 2412/2432 MHz, m0, HT40 Beam Forming

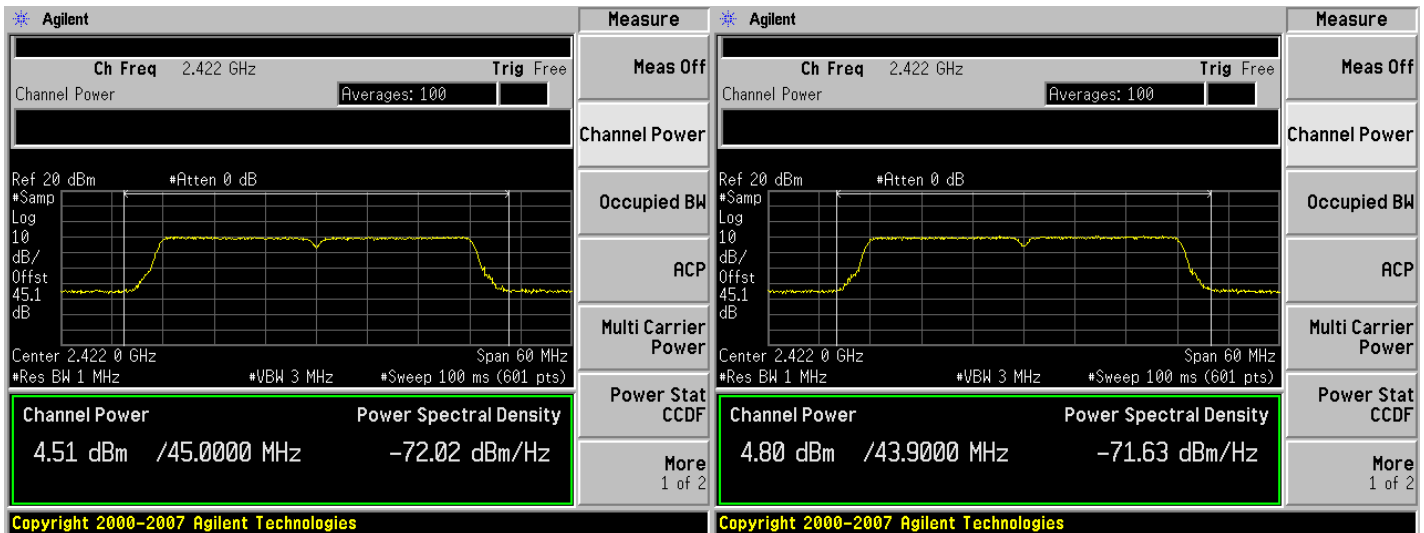

Antenna A

Antenna B

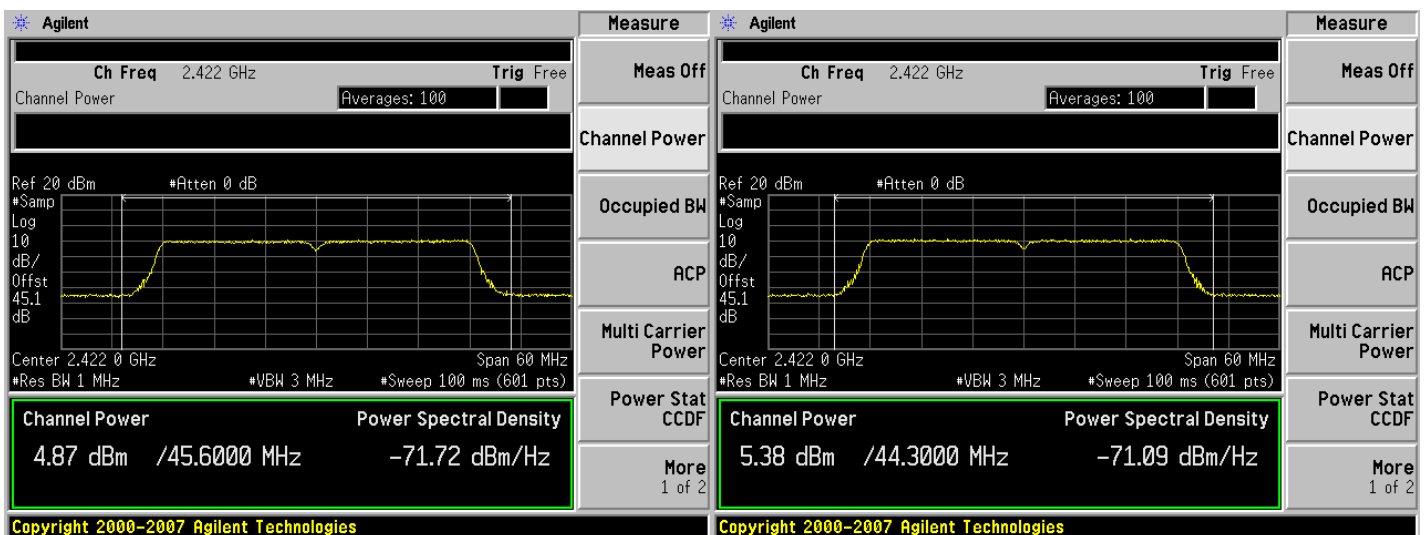


Antenna C

Antenna D




Peak Output Power, 2427/2447 MHz, 6 Mbps, Non-HT40

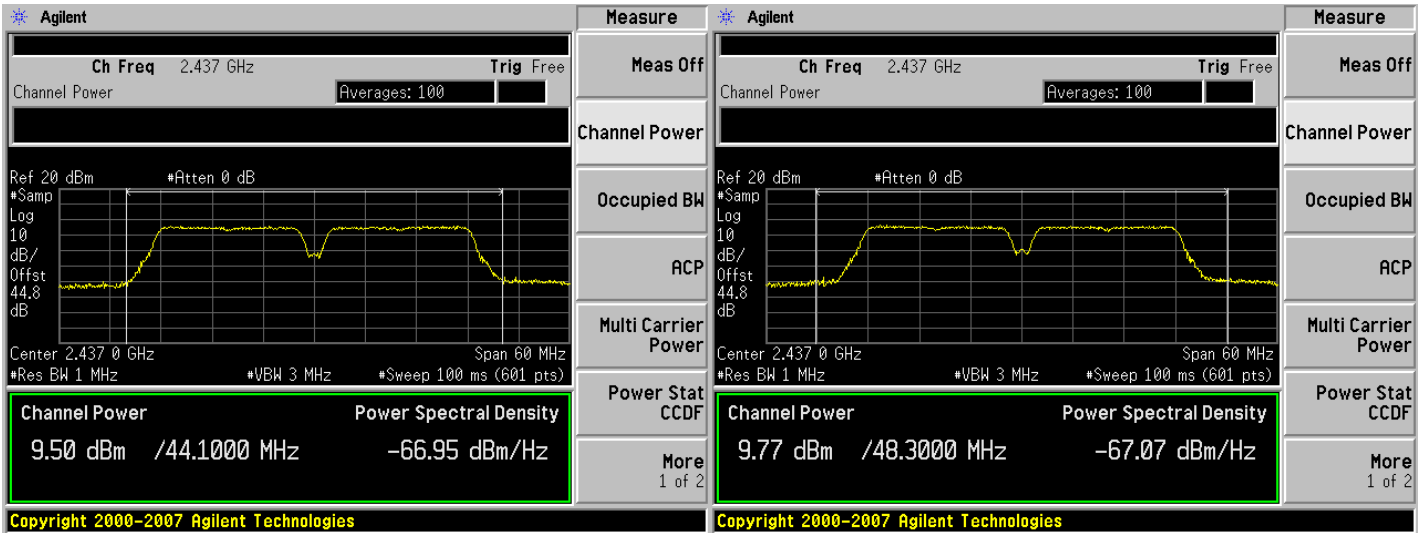

Antenna A

Antenna B

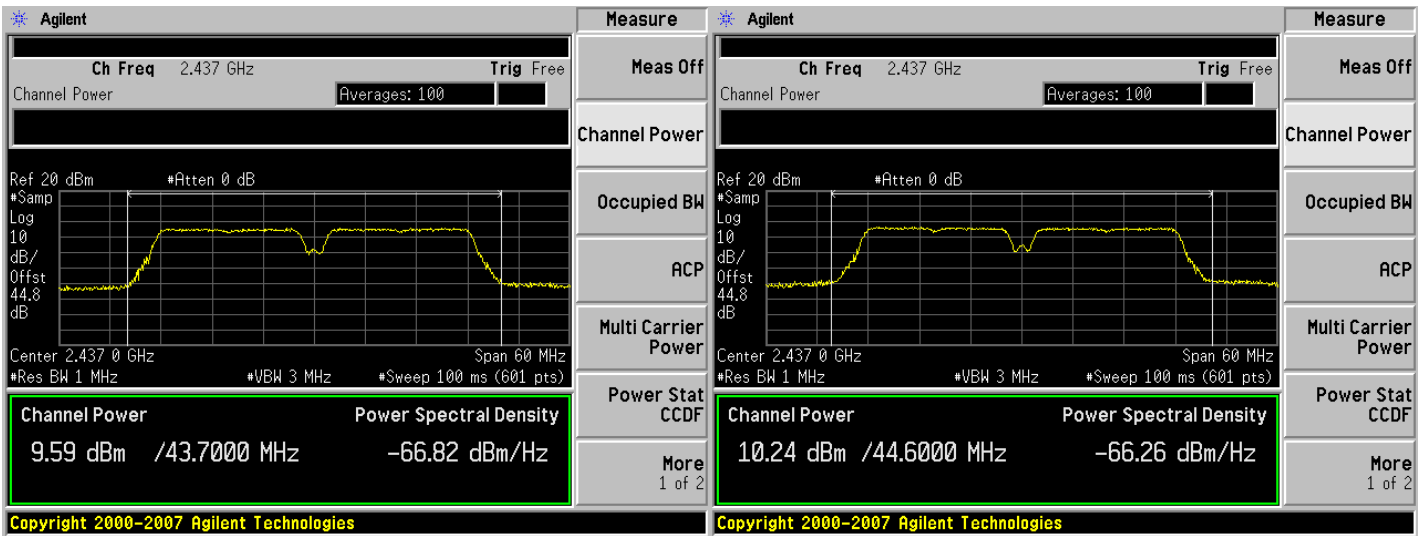


Antenna C

Antenna D




Peak Output Power, 2427/2447 MHz, m0, HT40 with and without STBC

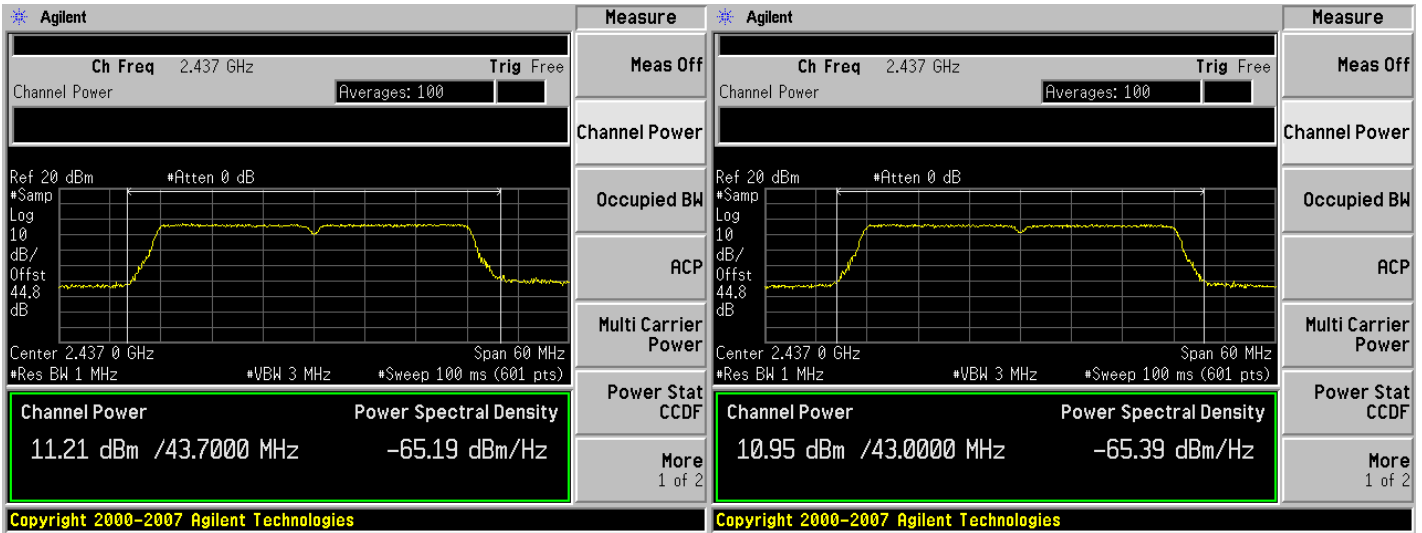

Antenna A

Antenna B

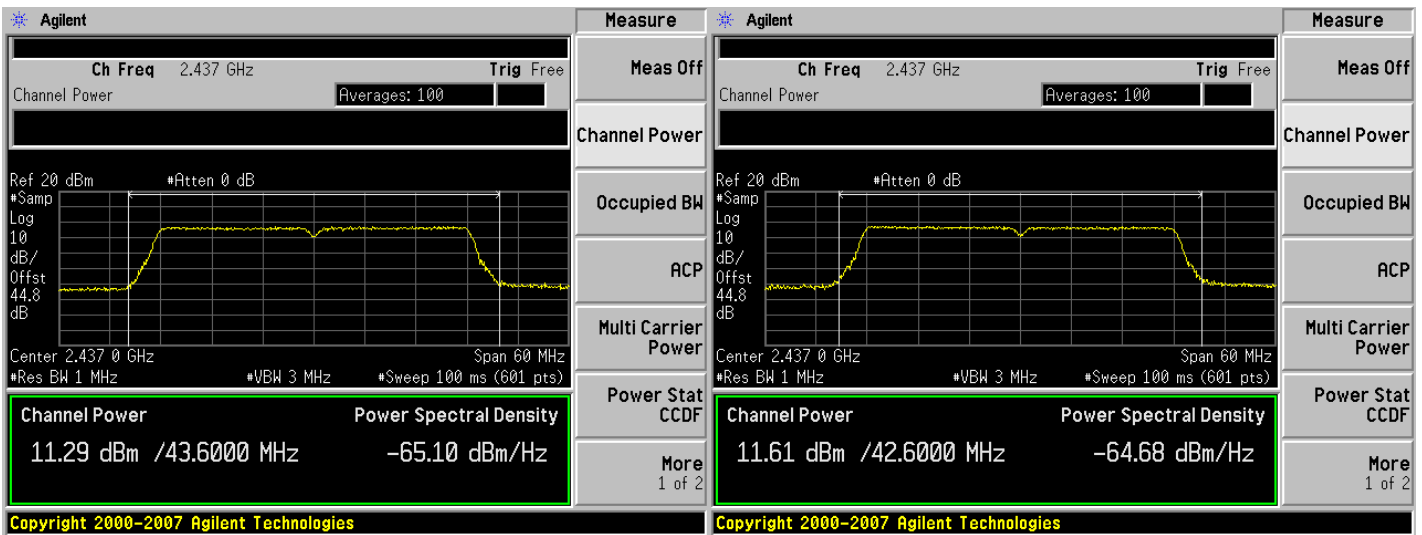


Antenna C

Antenna D




Peak Output Power, 2427/2447 MHz, m0/m8/m16, HT40 Beam Forming

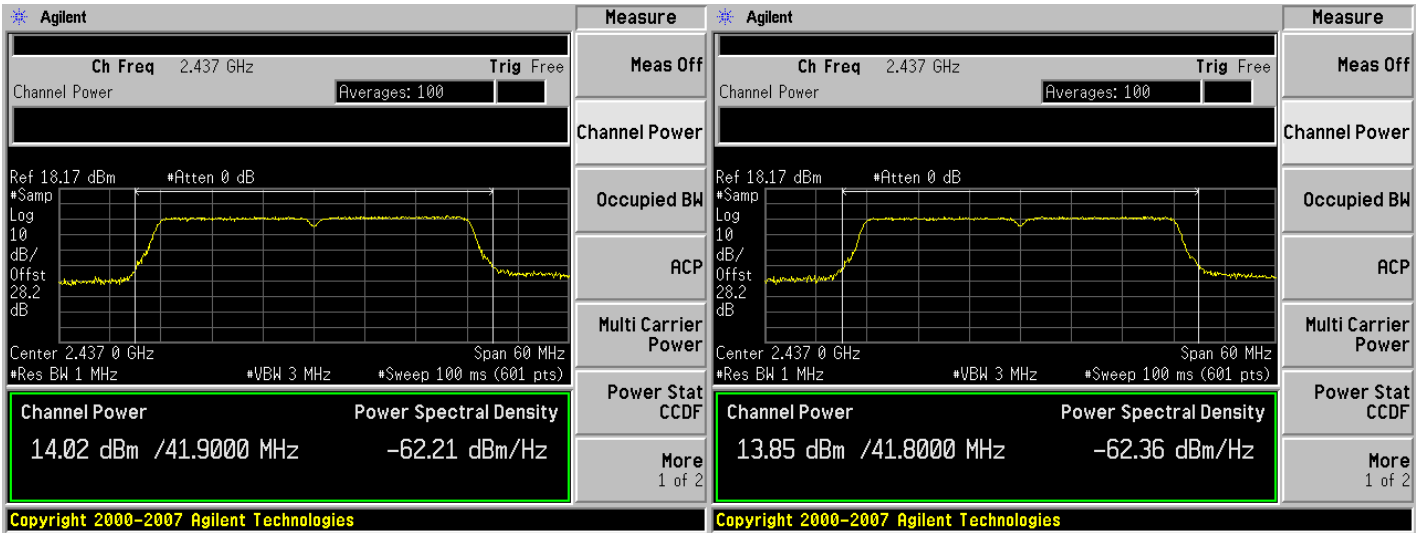

Antenna A

Antenna B

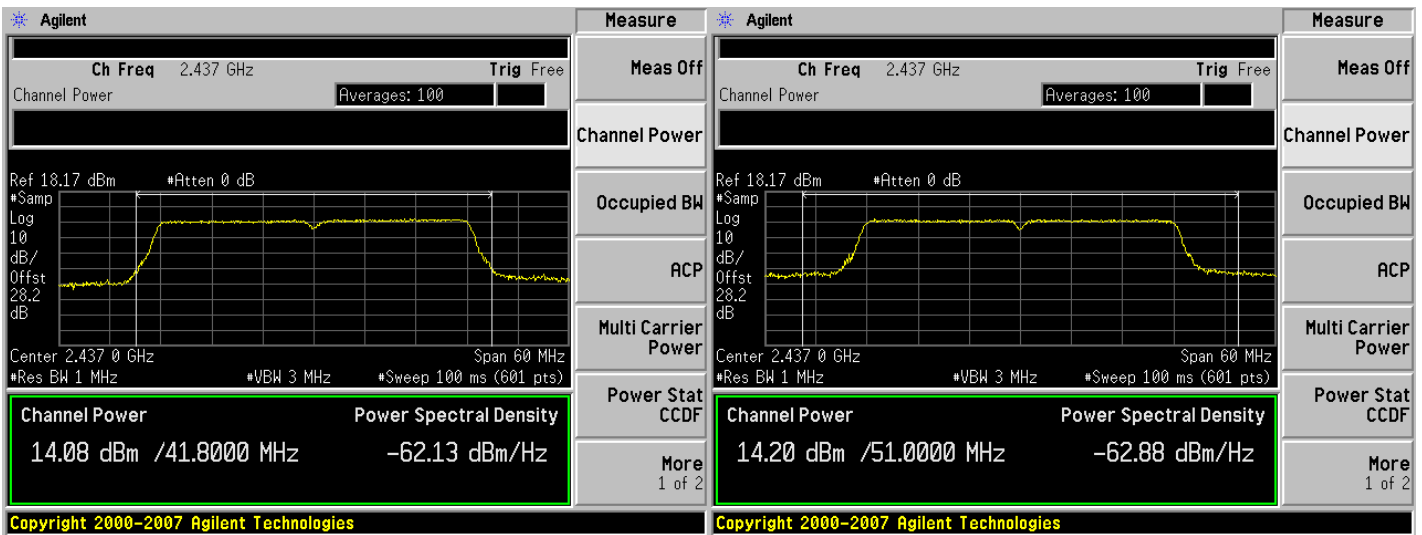


Antenna C

Antenna D




Peak Output Power, 2442/2462 MHz, 6 Mbps, Non-HT40

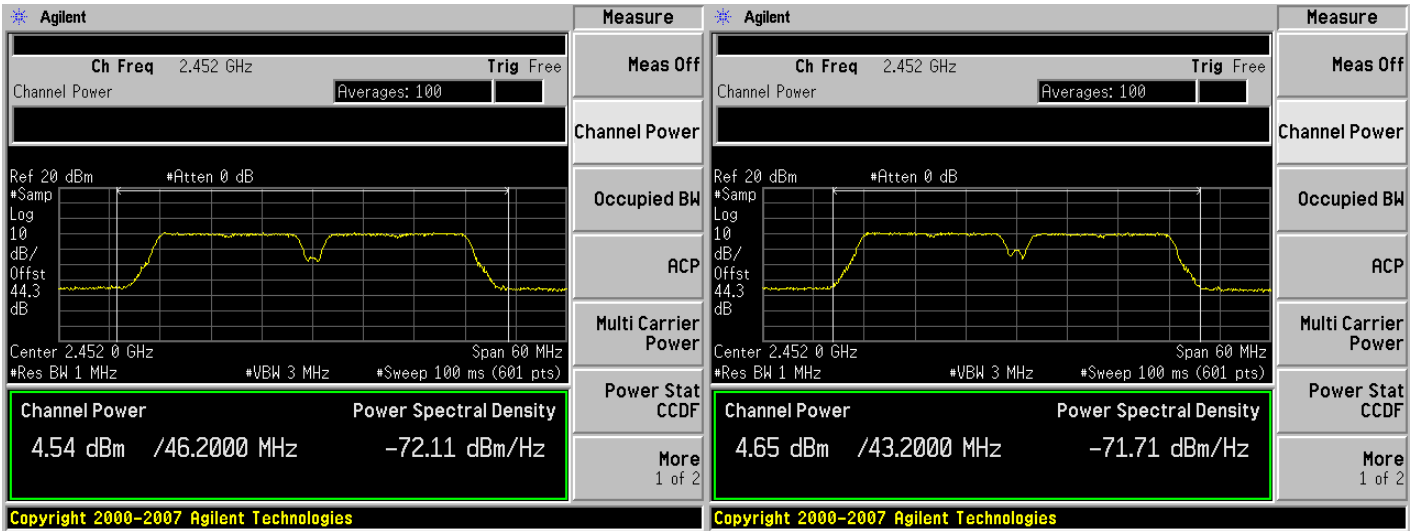

Antenna A

Antenna B

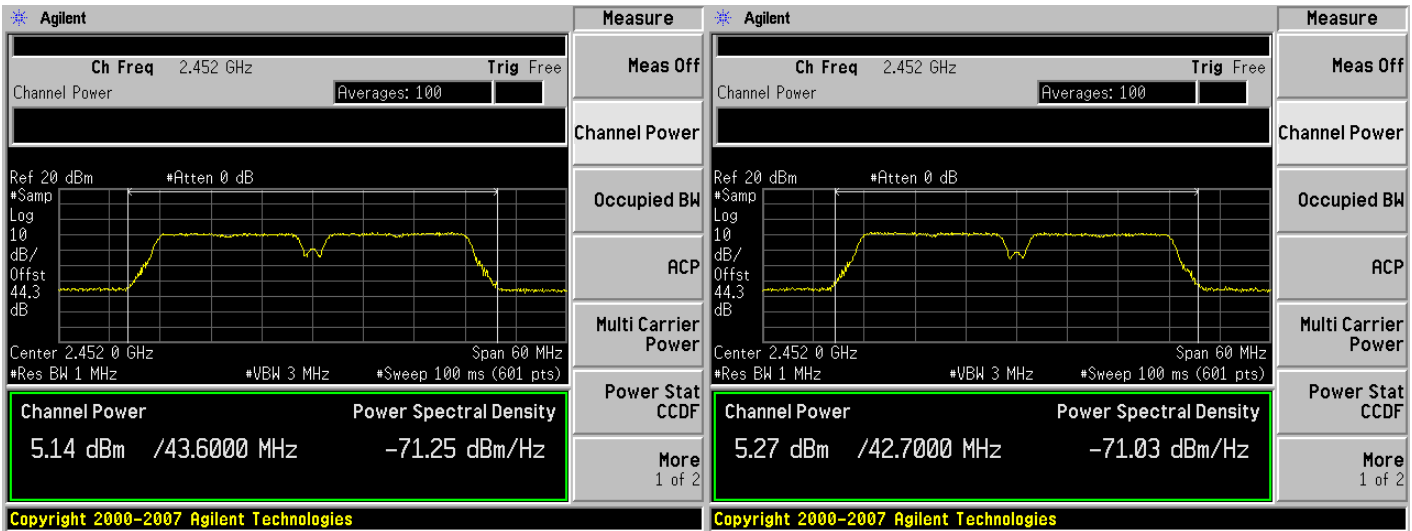


Antenna C

Antenna D




Peak Output Power, 2442/2462 MHz, m0, HT40 with and without STBC

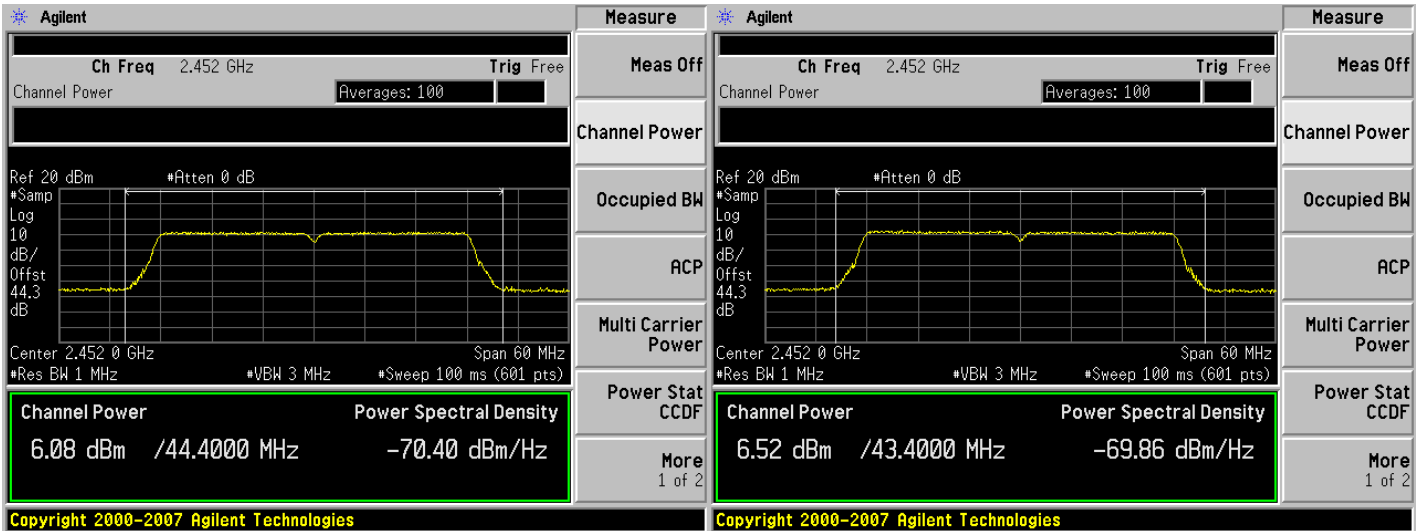

Antenna A

Antenna B

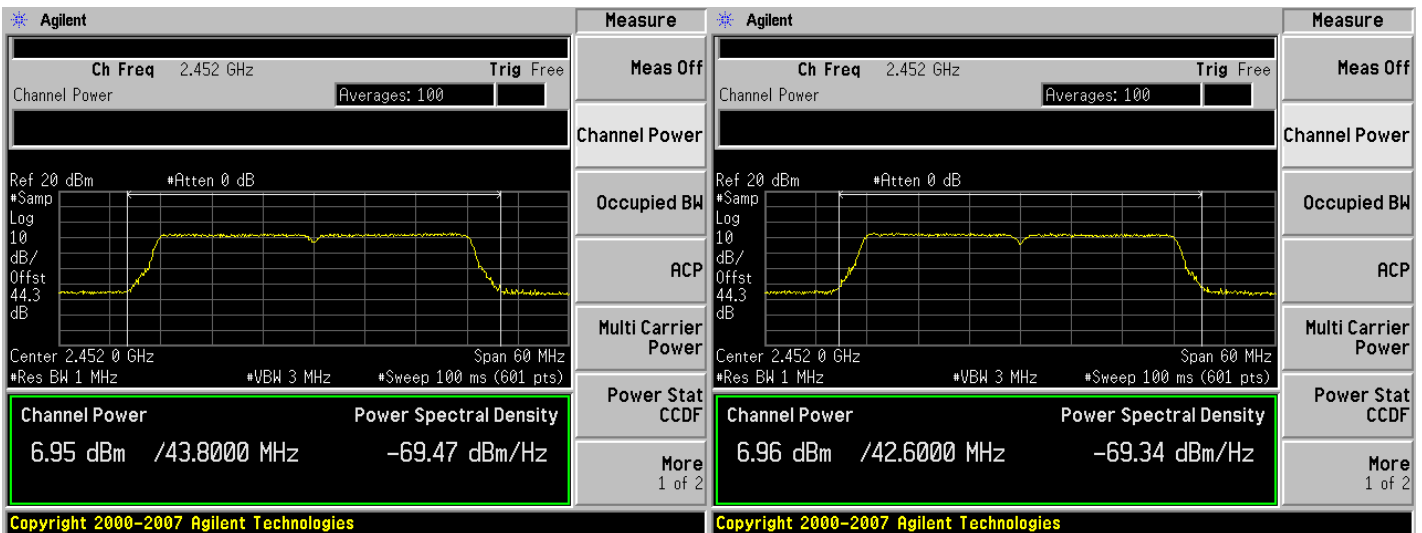


Antenna C

Antenna D




Peak Output Power, 2442/2462 MHz, m0, HT40 Beam Forming

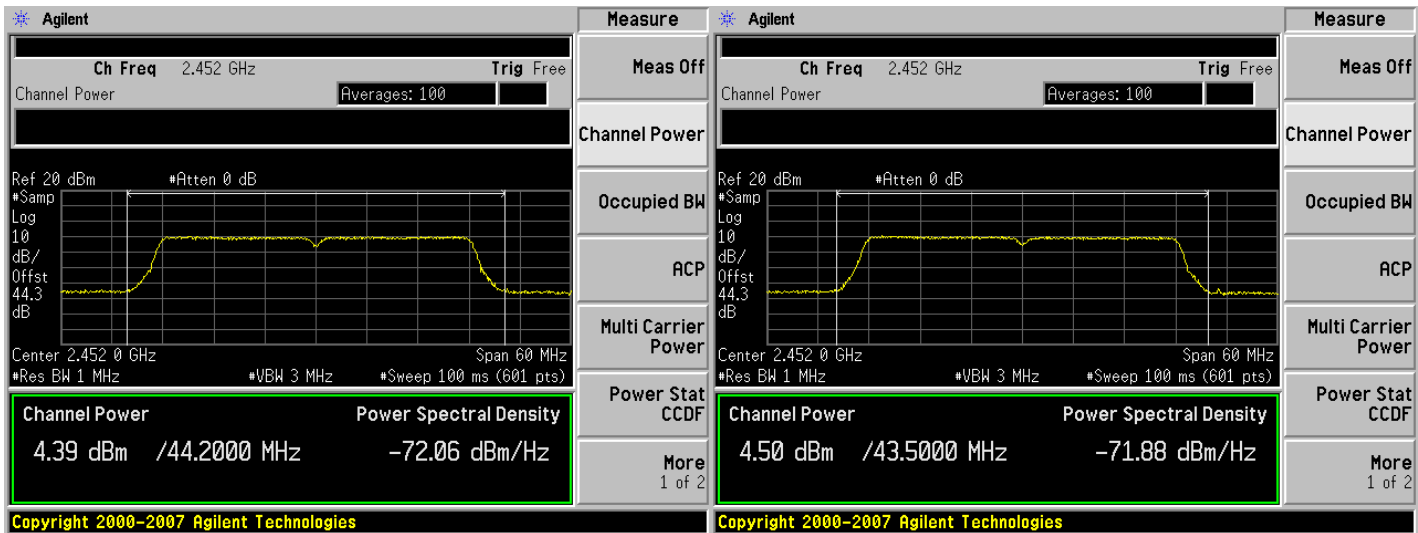

Antenna A

Antenna B

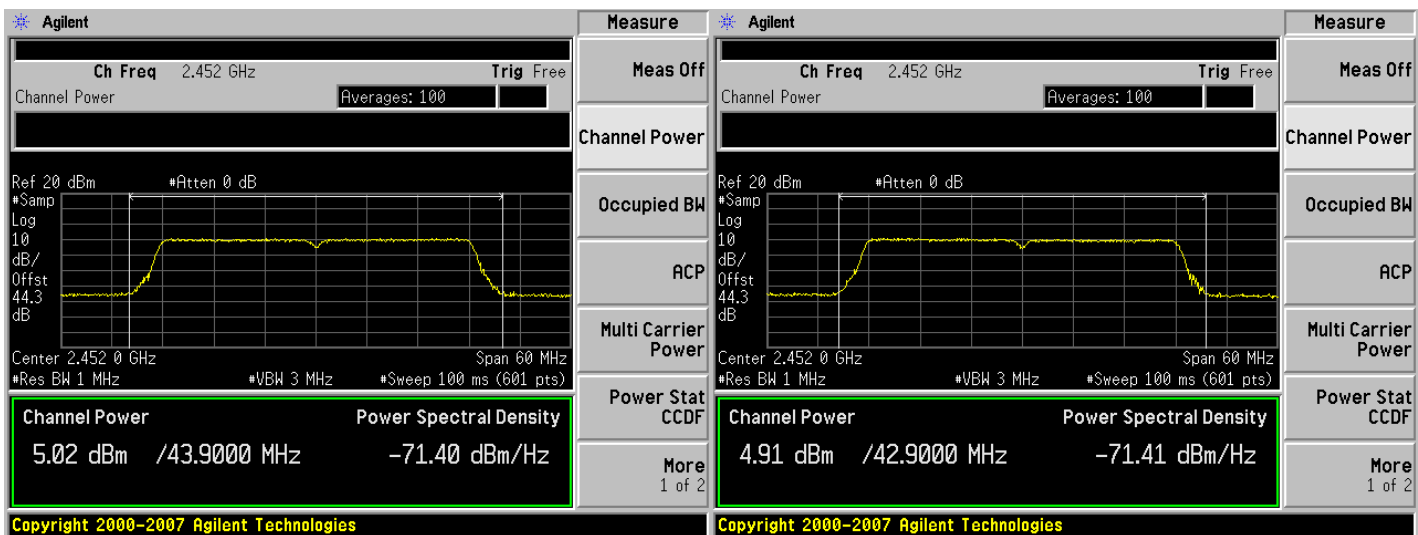


Antenna C

Antenna D




Peak Output Power, 2442/2462 MHz, m8/m16, HT40 Beam Forming

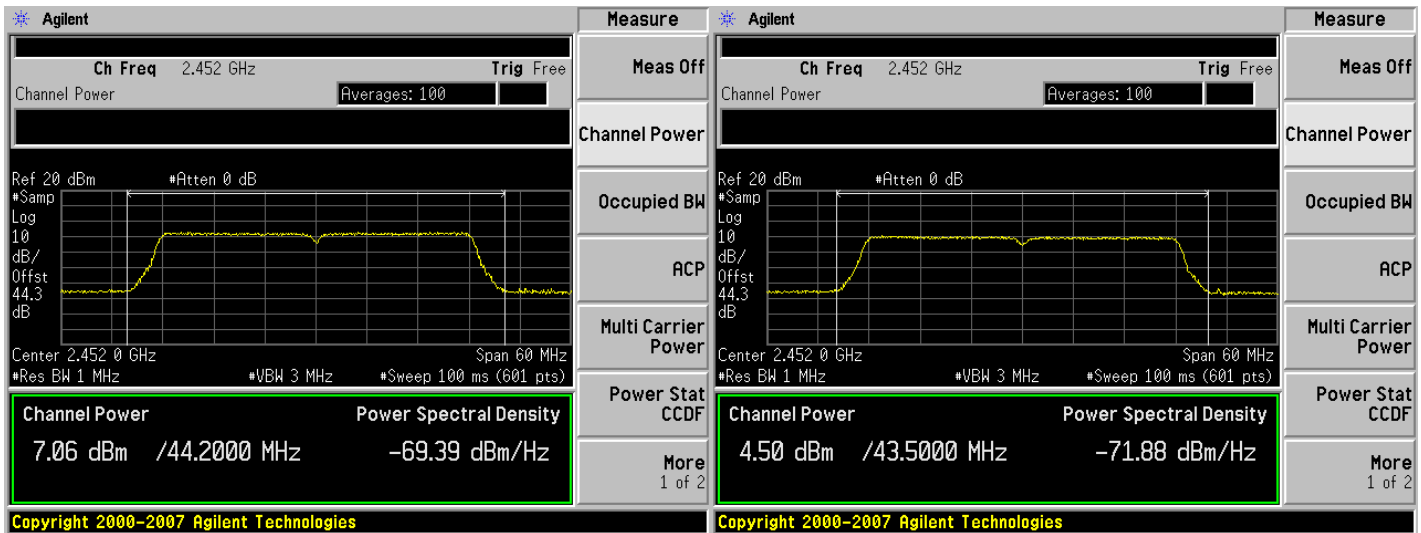

Antenna A

Antenna B

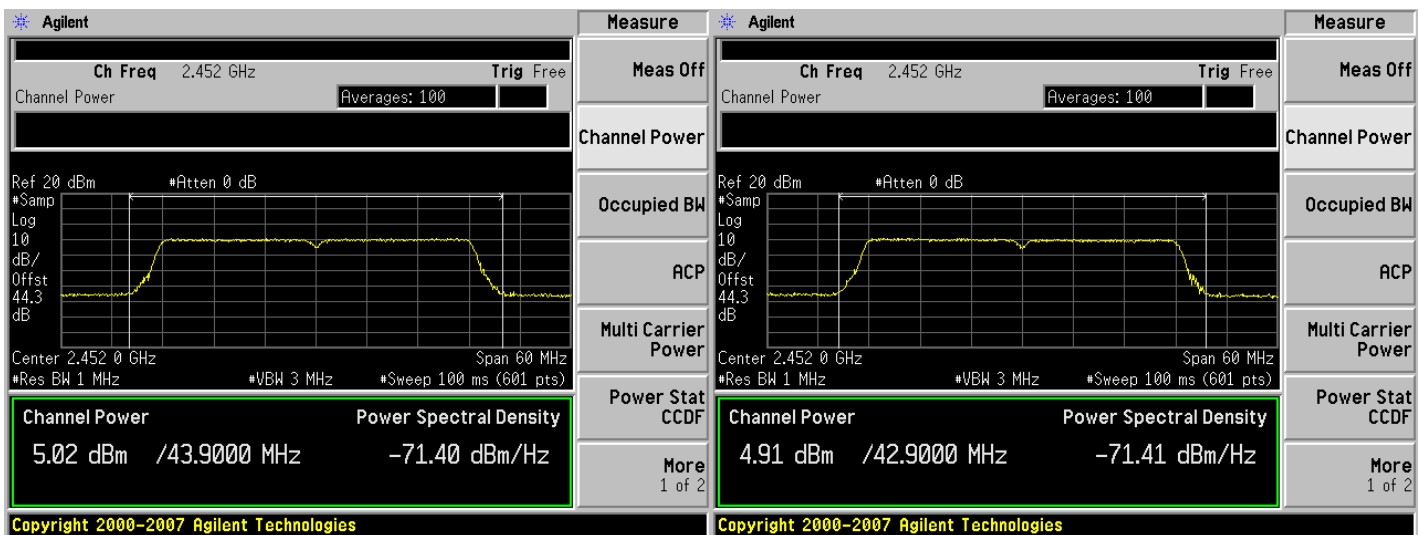

Antenna C

Antenna D



Power Spectral Density

15.247: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

| | |
|-----------------------|--|
| Center Frequency: | Frequency from table below |
| Span: | 20 MHz |
| Ref Level Offset: | Correct for attenuator and cable loss. |
| Reference Level: | 20 dBm |
| Attenuation: | 20 dB |
| Sweep Time: | 10s |
| Resolution Bandwidth: | 3 kHz |
| Video Bandwidth: | 10 kHz |
| Detector: | Peak |
| Trace: | Single |
| Marker: | Peak Search |

Record the Marker value.


The "Measure and add $10 \log(N)$ dB technique", where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.




| Frequency (MHz) | Mode | Data Rate (Mbps) | PSD / Antenna (dBm/3kHz) | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) |
|-----------------|--------------------------------------|------------------|--------------------------|----------------------|------------------|
| 2412 | Legacy CCK, 1 to 11 Mbps | 11 | -7.9 | -1.8 | 8 |
| | Non HT-20, 6 to 54 Mbps | 6 | -11.6 | -5.6 | 8 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | -11.6 | -5.6 | 8 |
| | HT-20, M0 to M23 | m0 | -10.0 | -4.0 | 8 |
| | HT-20 STBC, M0 to M7 | m0 | -10.0 | -4.0 | 8 |
| | HT-20 Beam Forming, M0 to M23 | m0 | -10.0 | -4.0 | 8 |
| 2437 | Legacy CCK, 1 to 11 Mbps | 11 | -5.3 | 0.7 | 8 |
| | Non HT-20, 6 to 54 Mbps | 6 | -9.8 | -3.8 | 8 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | -9.8 | -3.8 | 8 |
| | HT-20, M0 to M23 | m0 | -9.8 | -3.7 | 8 |
| | HT-20 STBC, M0 to M7 | m0 | -9.8 | -3.8 | 8 |
| | HT-20 Beam Forming, M0 to M23 | m0 | -9.8 | -3.8 | 8 |
| 2462 | Legacy CCK, 1 to 11 Mbps | 11 | -4.2 | 1.9 | 8 |
| | Non HT-20, 6 to 54 Mbps | 6 | -8.1 | -2.0 | 8 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | -8.1 | -2.1 | 8 |
| | HT-20, M0 to M23 | m0 | -11.0 | -5.0 | 8 |
| | HT-20 STBC, M0 to M7 | m0 | -11.0 | -5.0 | 8 |
| | HT-20 Beam Forming, M0 to M23 | m0 | -11.0 | -5.0 | 8 |
| 2412/2432 | Non HT-40 Duplicate, 6-54 Mbps | 6 | -16.8 | -10.7 | 8 |
| | HT-40, M0 to M23 | m0 | -17.8 | -11.8 | 8 |
| | HT-40 STBC, M0 to M7 | m0 | -17.8 | -11.8 | 8 |
| | HT-40 Beam Forming, M0 to M23 | m0 | -17.8 | -11.8 | 8 |
| 2427/2447 | Non HT-40 Duplicate, 6-54 Mbps | 6 | -16.8 | -10.8 | 8 |
| | HT-40, M0 to M23 | m0 | -17.3 | -11.3 | 8 |
| | HT-40 STBC, M0 to M7 | m0 | -17.3 | -11.3 | 8 |
| | HT-40 Beam Forming, M0 to M23 | m0 | -17.3 | -11.3 | 8 |
| 2442/2462 | Non HT-40 Duplicate, 6-54 Mbps | 6 | -17.5 | -11.4 | 8 |
| | HT-40, M0 to M23 | m0 | -17.0 | -10.9 | 8 |
| | HT-40 STBC, M0 to M7 | m0 | -17.0 | -11.0 | 8 |
| | HT-40 Beam Forming, M0 to M23 | m0 | -17.0 | -11.0 | 8 |



Power Spectral Density, 2412 MHz, 11 Mbps, Legacy CCK

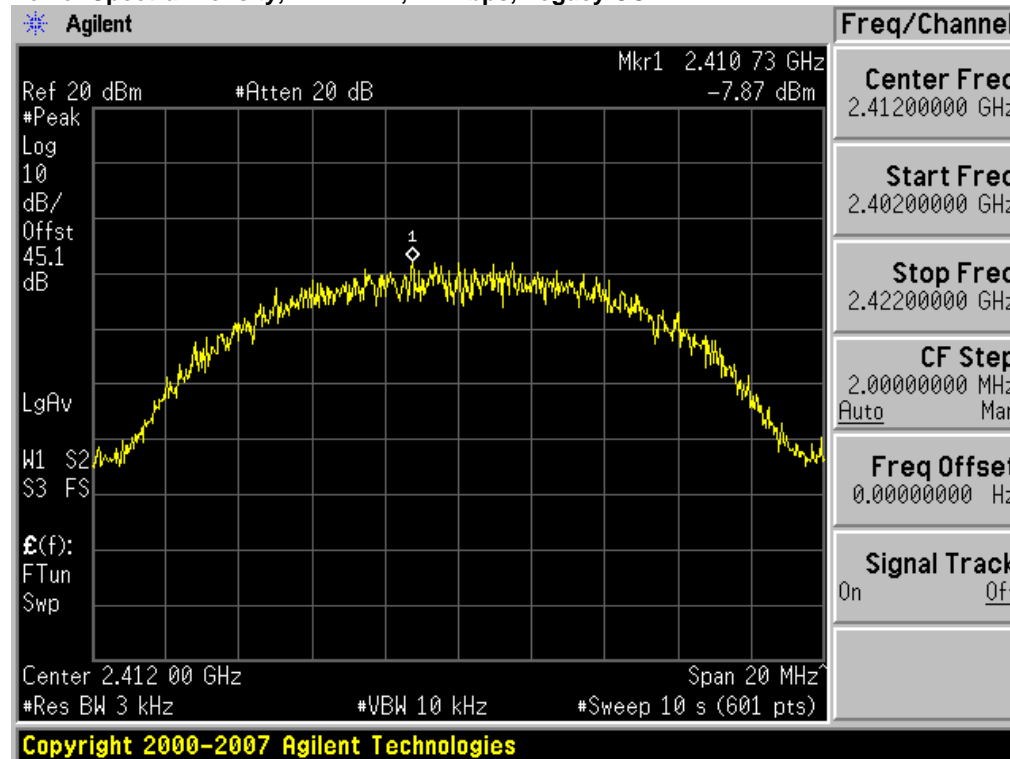


Power Spectral Density, 2412 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

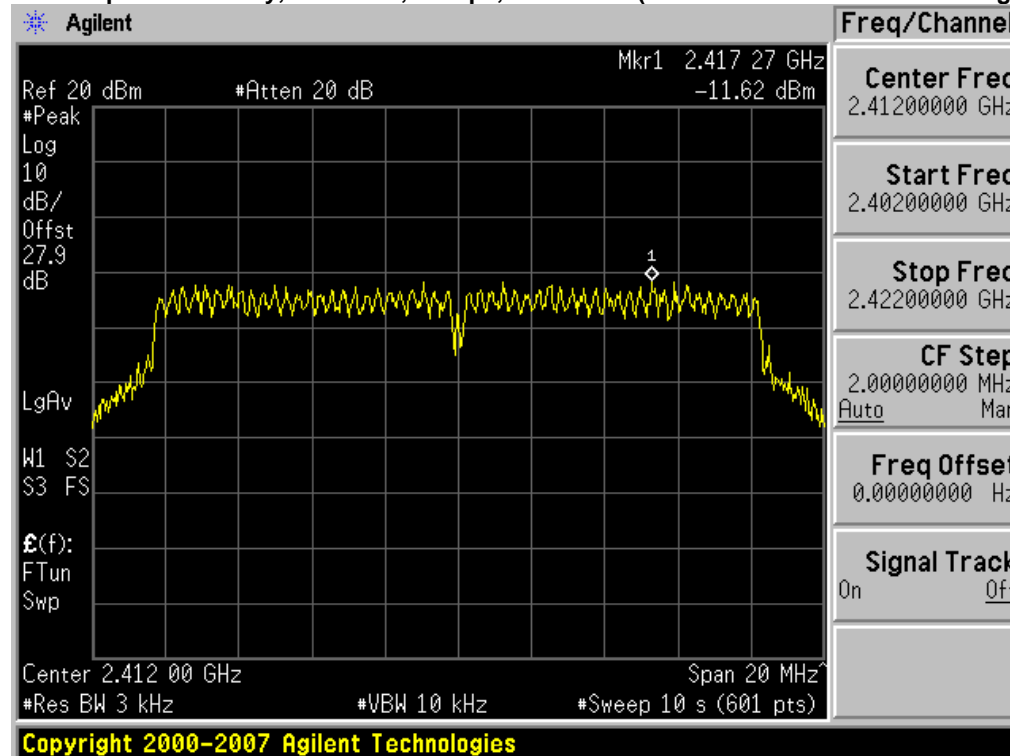




Power Spectral Density, 2412 MHz, m0, HT20 (with and without Beam Forming / STBC)

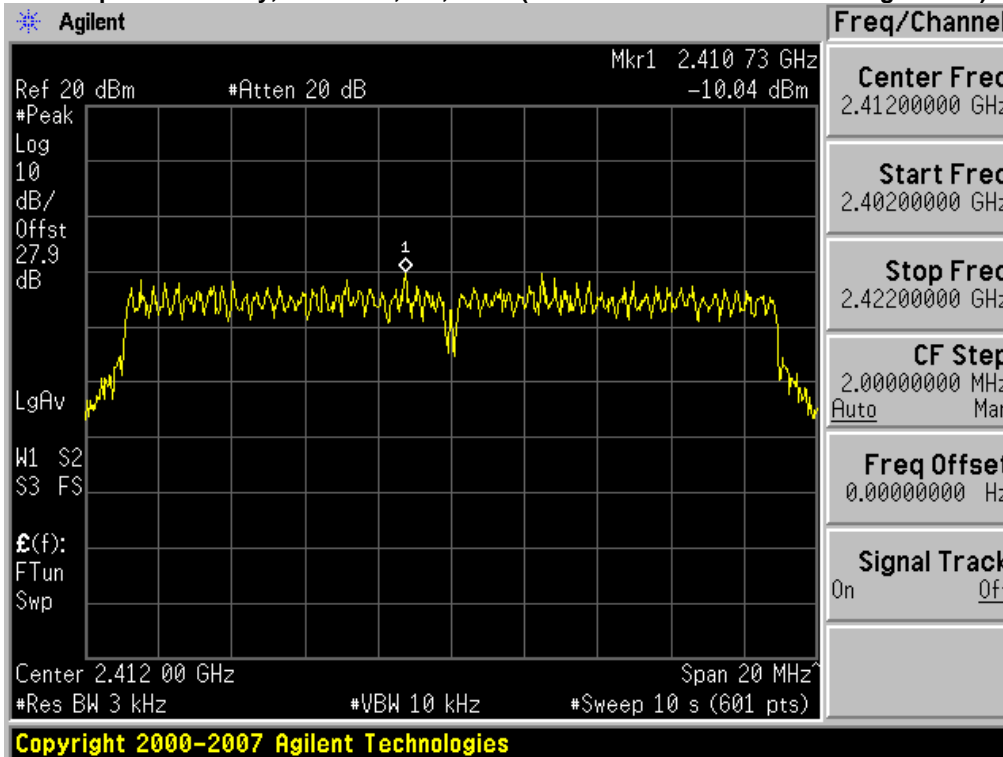


Power Spectral Density, 2437 MHz, 11 Mbps, Legacy CCK

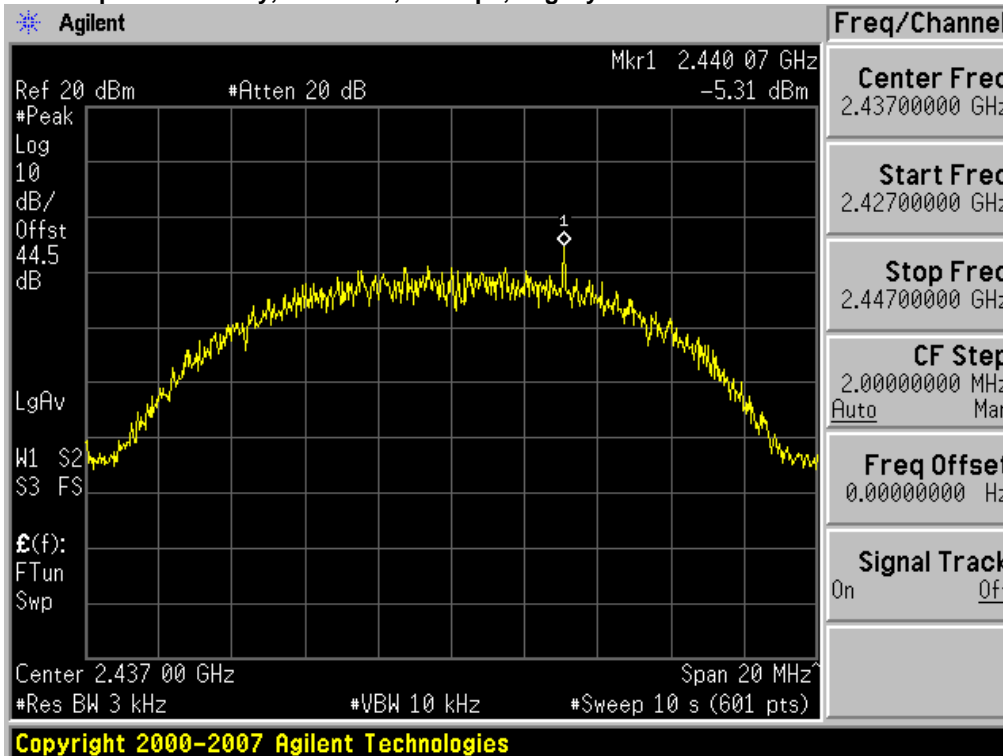




Power Spectral Density, 2437 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

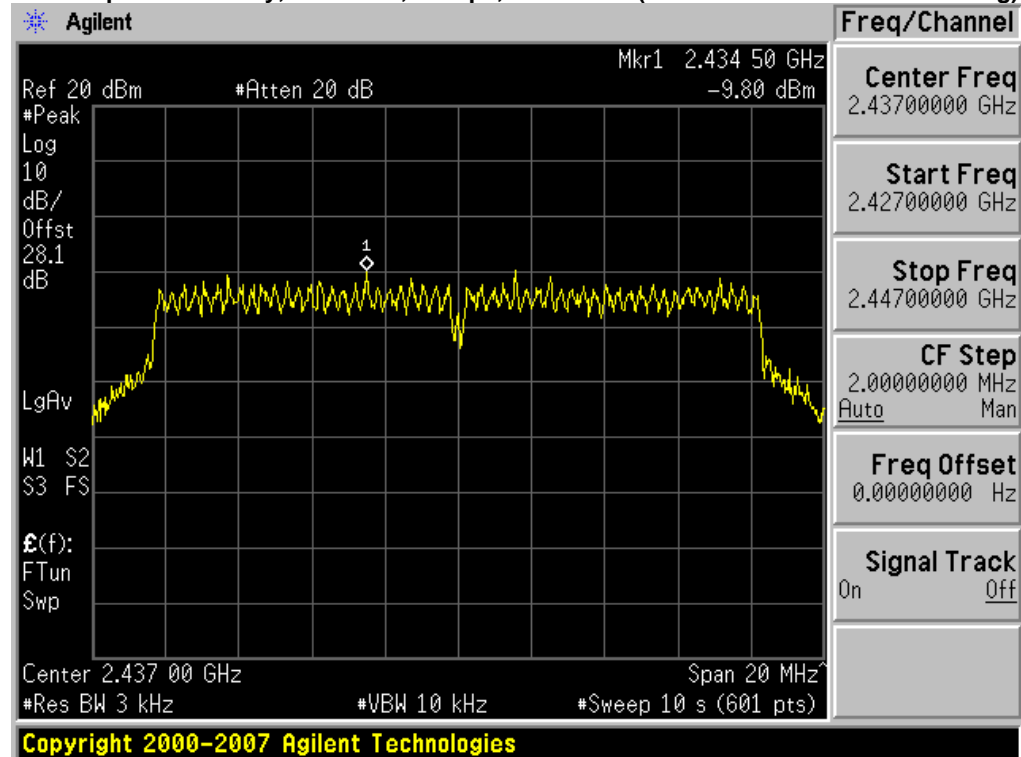


Power Spectral Density, 2437 MHz, m0, HT20 (with and without Beam Forming / STBC)

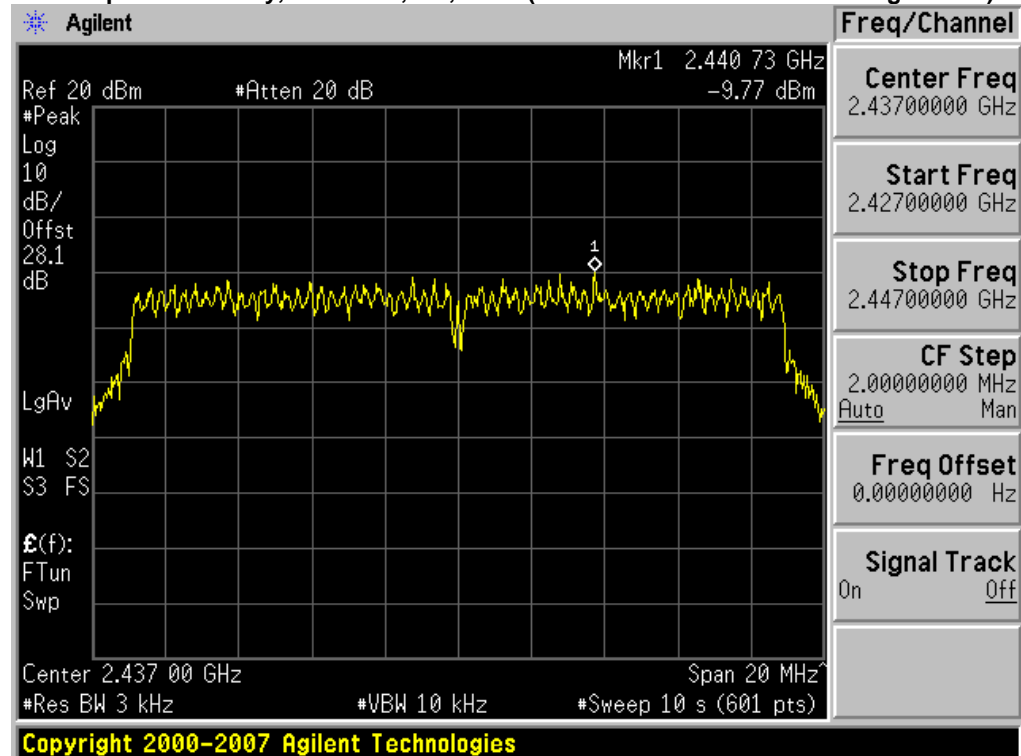




Power Spectral Density, 2462 MHz, 11 Mbps, Legacy CCK

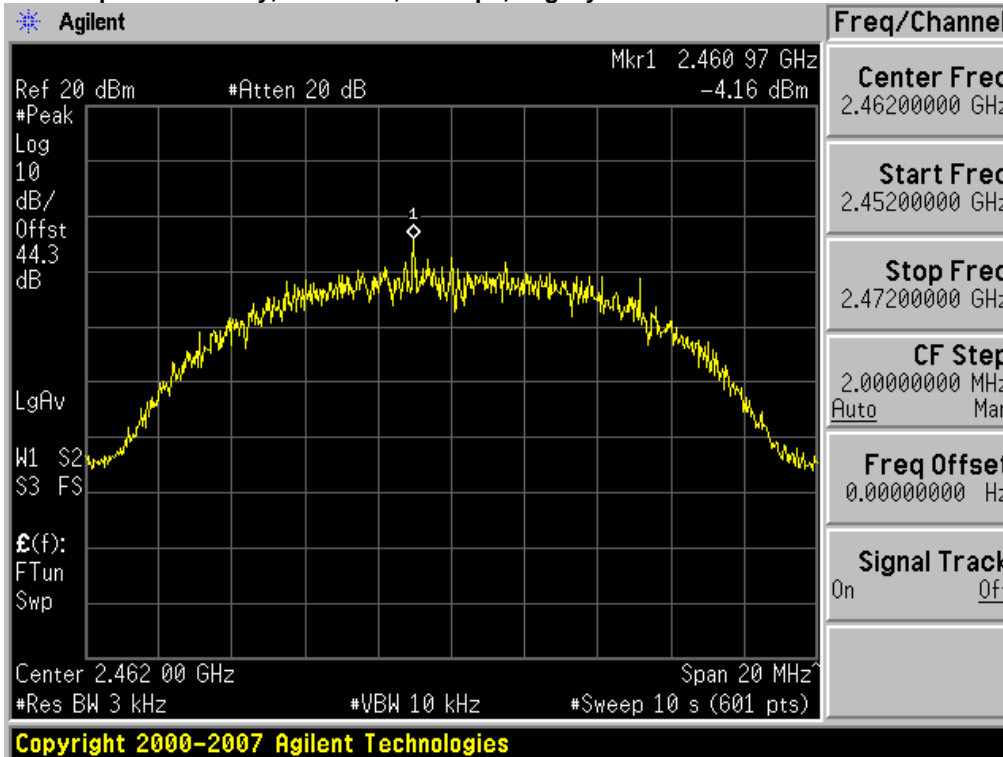


Power Spectral Density, 2462 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

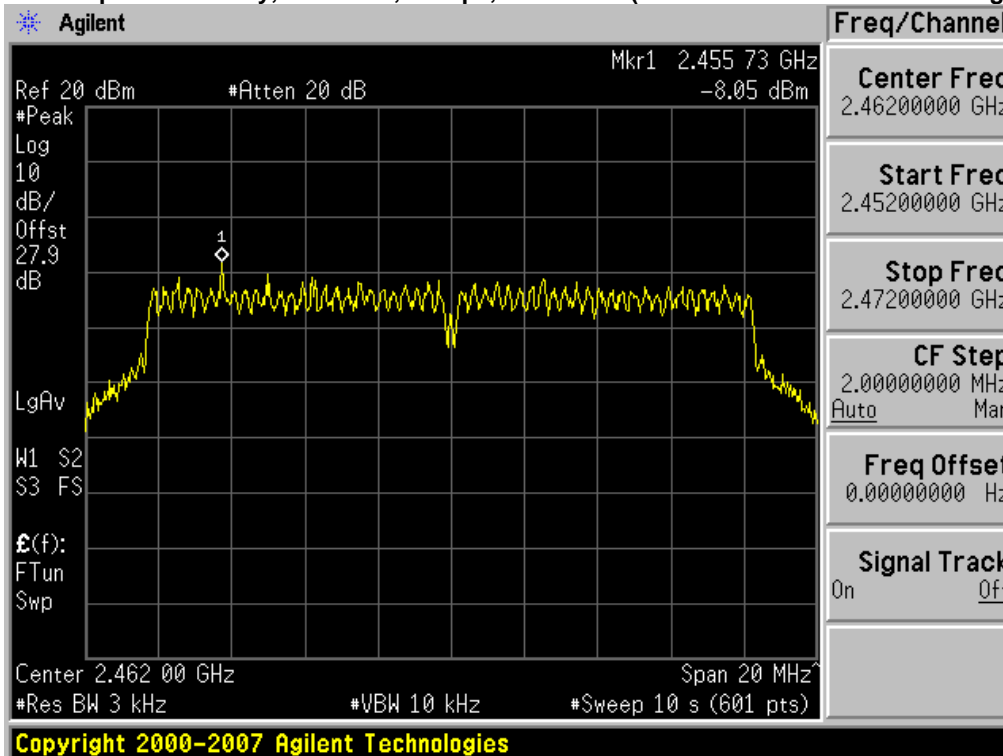




Power Spectral Density, 2462 MHz, m0, HT20 (with and without Beam Forming / STBC)

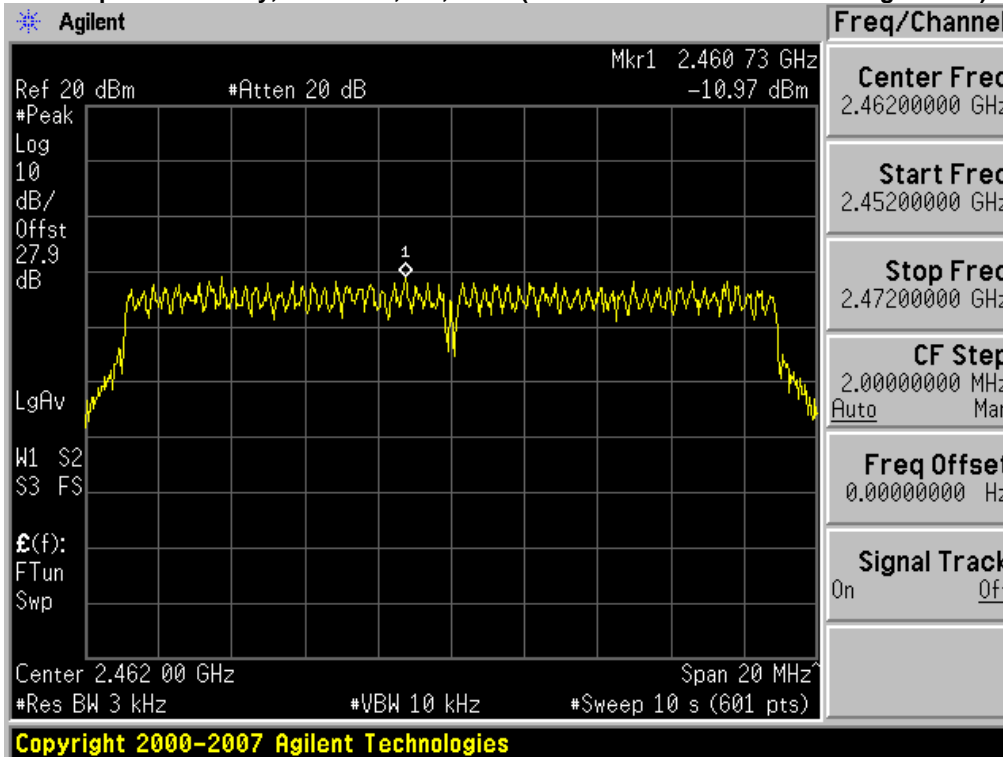


Power Spectral Density, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate

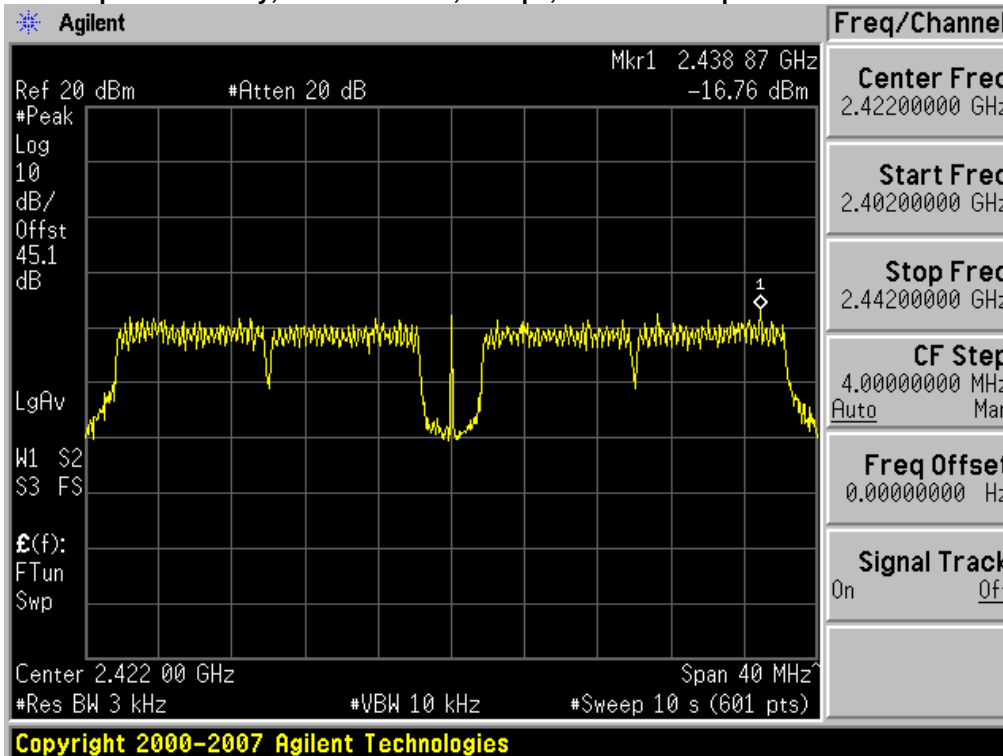




Power Spectral Density, 2412/2432 MHz, m0, HT-40 (with and without Beam Forming / STBC)

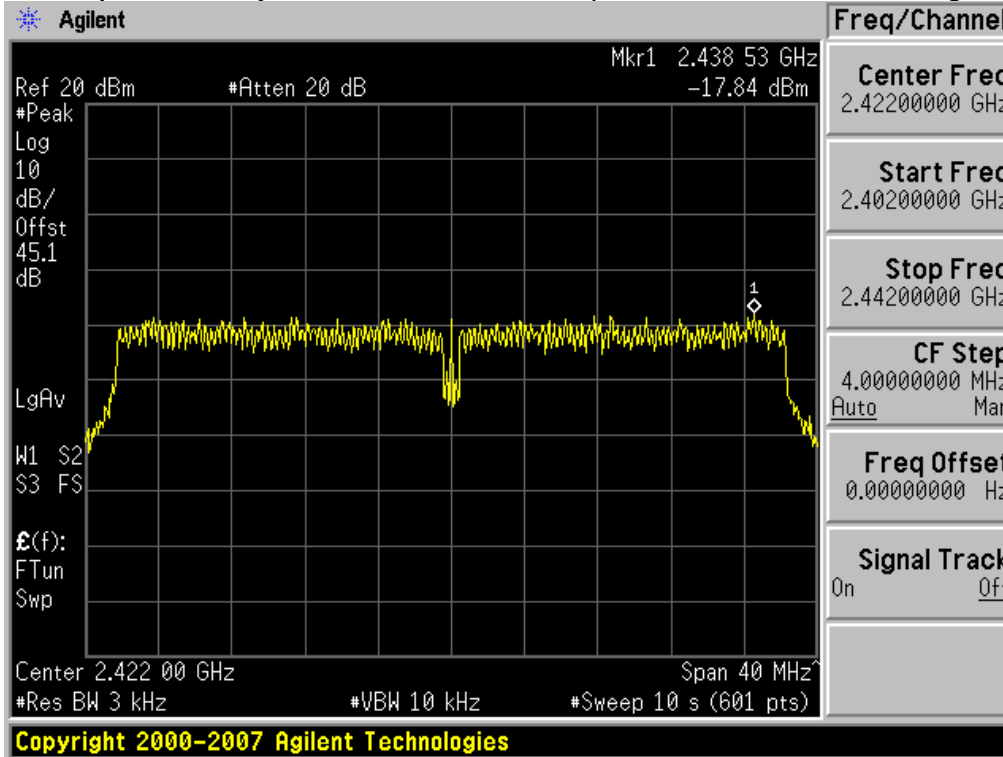


Power Spectral Density, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate

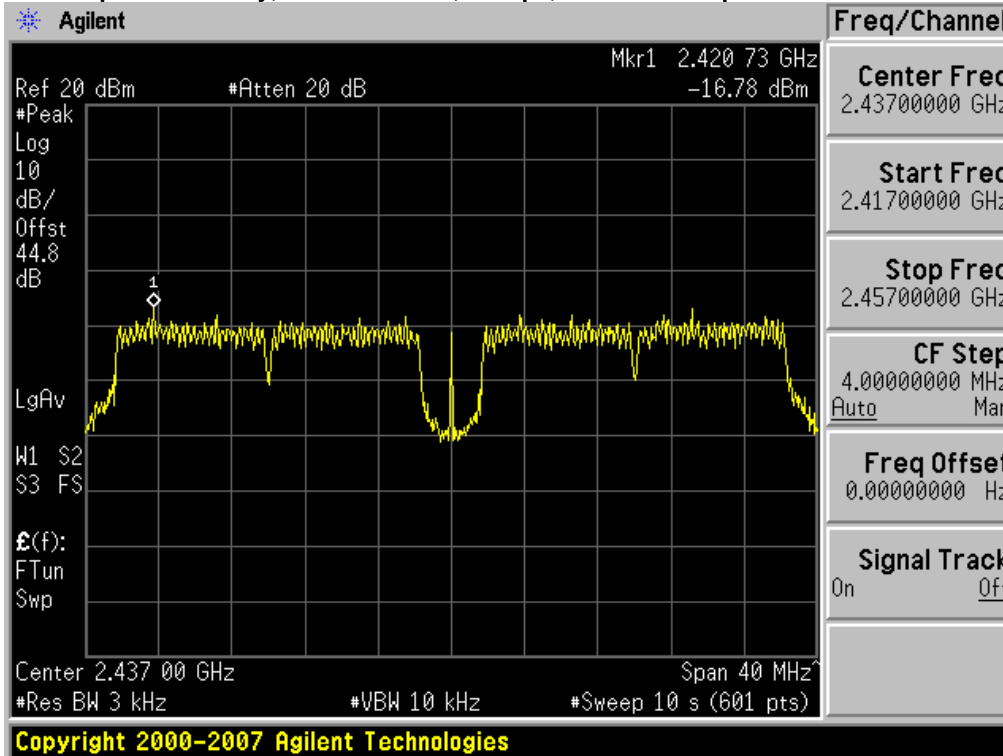




Power Spectral Density, 2427/2447 MHz, m0, HT-40 (with and without Beam Forming / STBC)

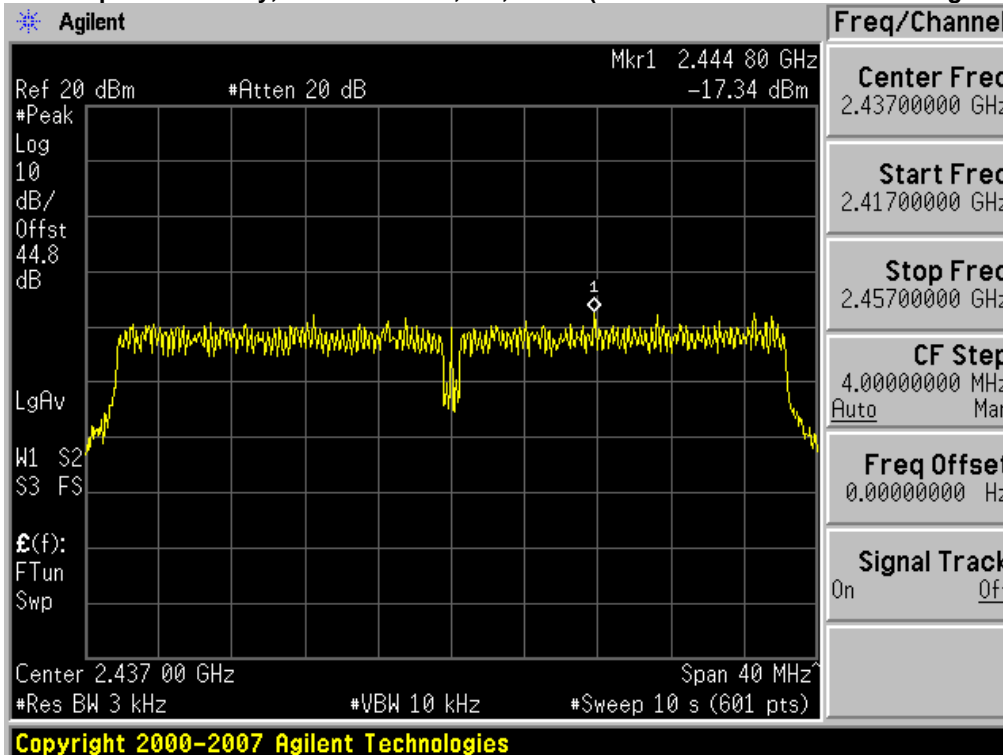


Power Spectral Density, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate

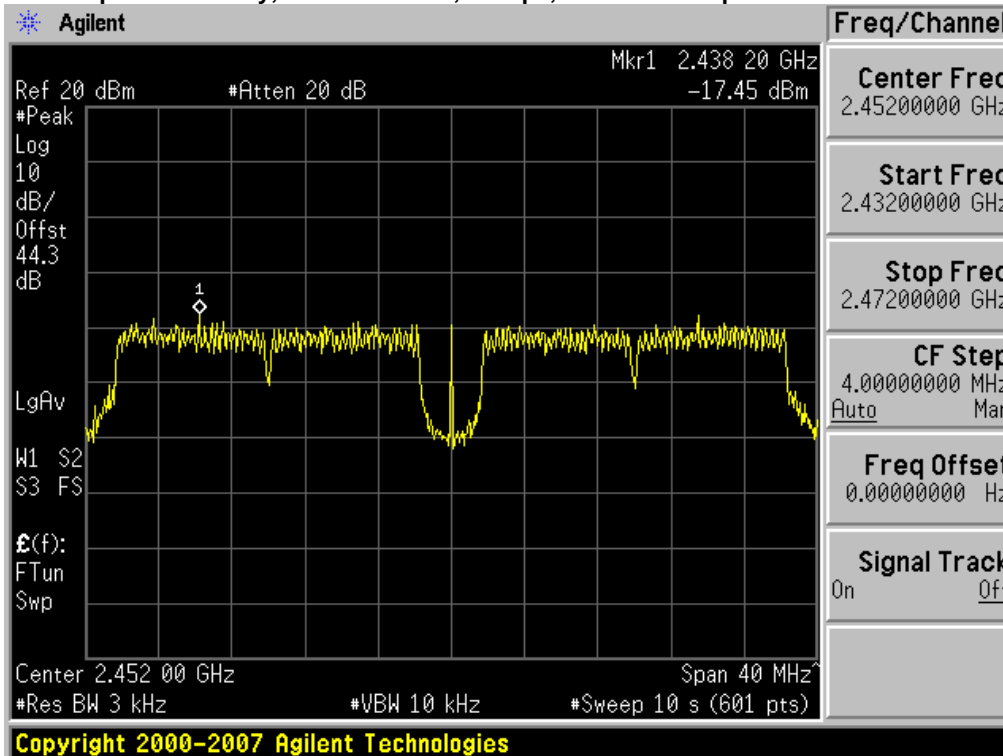



Power Spectral Density, 2442/2462 MHz, m0, HT-40 (with and without Beam Forming / STBC)

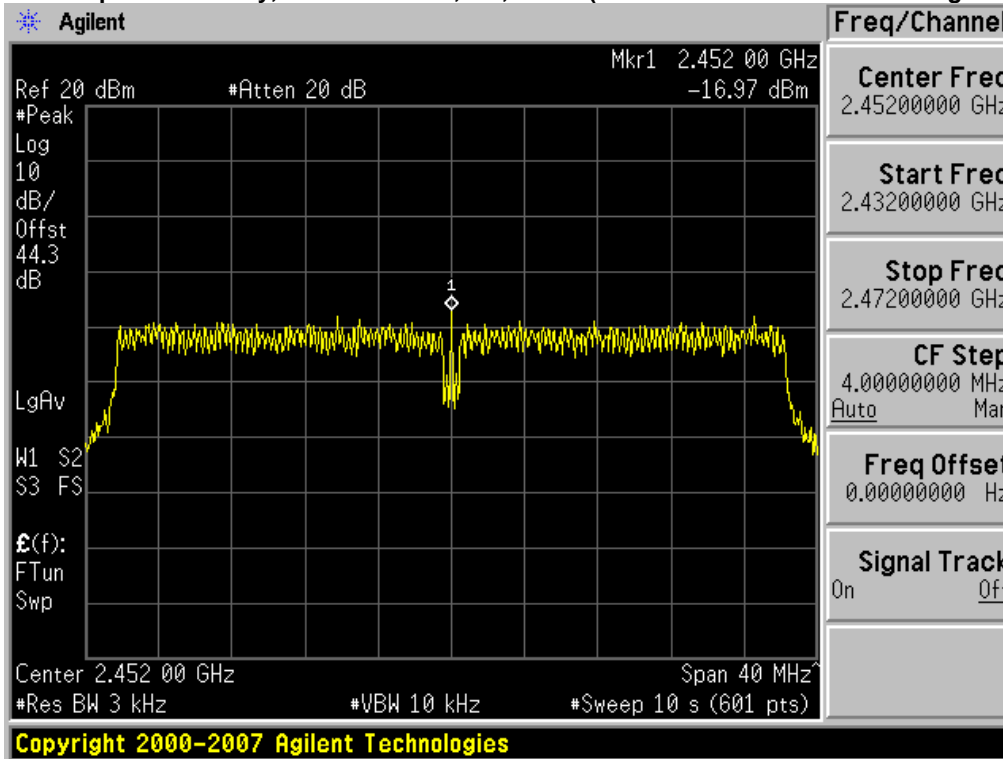



Conducted Spurious Emissions

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

| | |
|-----------------------|---------------|
| Span: | 30 MHz-26 GHz |
| Reference Level: | 20 dBm |
| Attenuation: | 10 dB |
| Sweep Time: | 5s |
| Resolution Bandwidth: | 100 kHz |
| Video Bandwidth: | 300 kHz |
| Detector: | Peak |
| Trace: | Single |
| Marker: | Peak |

Record the marker waveform peak to spur difference


Out-of-band and spurious emissions tests are performed on each output individually without summing or adding $10 \log(N)$ since the measurements are made relative to the in-band emissions on the individual outputs. The worst case output is recorded.




| Frequency (MHz) | Mode | Data Rate (Mbps) | Conducted Spur Delta (dB) | Limit (dBc) | Margin (dB) |
|-----------------|--------------------------------------|------------------|---------------------------|-------------|-------------|
| 2412 | Legacy CCK, 1 to 11 Mbps | 11 | 58.7 | 30.0 | 28.7 |
| | Non HT-20, 6 to 54 Mbps | 6 | 55.2 | 30.0 | 25.2 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 55.2 | 30.0 | 25.2 |
| | HT-20, M0 to M23 | m0 | 54.1 | 30.0 | 24.1 |
| | HT-20 STBC, M0 to M7 | m0 | 54.1 | 30.0 | 24.1 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 54.1 | 30.0 | 24.1 |
| 2437 | Legacy CCK, 1 to 11 Mbps | 11 | 60.4 | 30.0 | 30.4 |
| | Non HT-20, 6 to 54 Mbps | 6 | 58.4 | 30.0 | 28.4 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 58.4 | 30.0 | 28.4 |
| | HT-20, M0 to M23 | m0 | 54.0 | 30.0 | 24.0 |
| | HT-20 STBC, M0 to M7 | m0 | 54.0 | 30.0 | 24.0 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 54.0 | 30.0 | 24.0 |
| 2462 | Legacy CCK, 1 to 11 Mbps | 11 | 59.0 | 30.0 | 29.0 |
| | Non HT-20, 6 to 54 Mbps | 6 | 54.9 | 30.0 | 24.9 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 54.9 | 30.0 | 24.9 |
| | HT-20, M0 to M23 | m0 | 58.3 | 30.0 | 28.3 |
| | HT-20 STBC, M0 to M7 | m0 | 58.3 | 30.0 | 28.3 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 58.3 | 30.0 | 28.3 |
| 2412/2432 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 50.7 | 30.0 | 20.7 |
| | HT-40, M0 to M23 | m0 | 51.0 | 30.0 | 21.0 |
| | HT-40 STBC, M0 to M7 | m0 | 51.0 | 30.0 | 21.0 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 51.0 | 30.0 | 21.0 |
| 2427/2447 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 48.6 | 30.0 | 18.6 |
| | HT-40, M0 to M23 | m0 | 50.0 | 30.0 | 20.0 |
| | HT-40 STBC, M0 to M7 | m0 | 50.0 | 30.0 | 20.0 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 50.0 | 30.0 | 20.0 |
| 2442/2462 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 49.0 | 30.0 | 19.0 |
| | HT-40, M0 to M23 | m0 | 49.0 | 30.0 | 19.0 |
| | HT-40 STBC, M0 to M7 | m0 | 49.0 | 30.0 | 19.0 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 49.0 | 30.0 | 19.0 |



Conducted Spurs, 2412 MHz, 11 Mbps, Legacy CCK

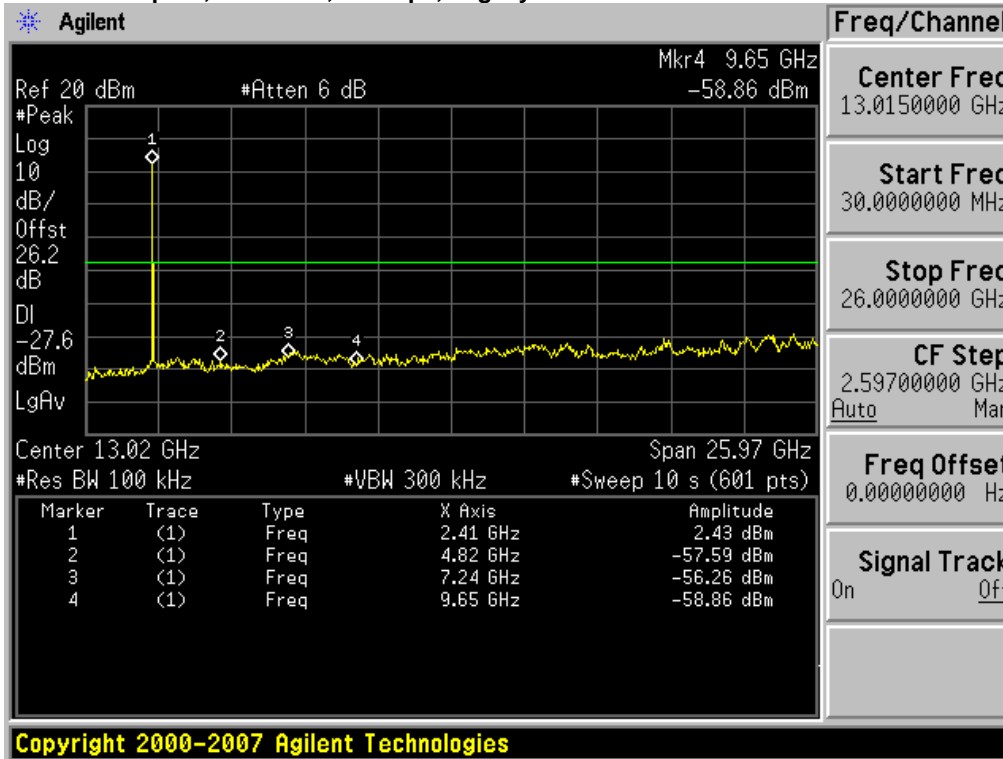


Conducted Spurs, 2412 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

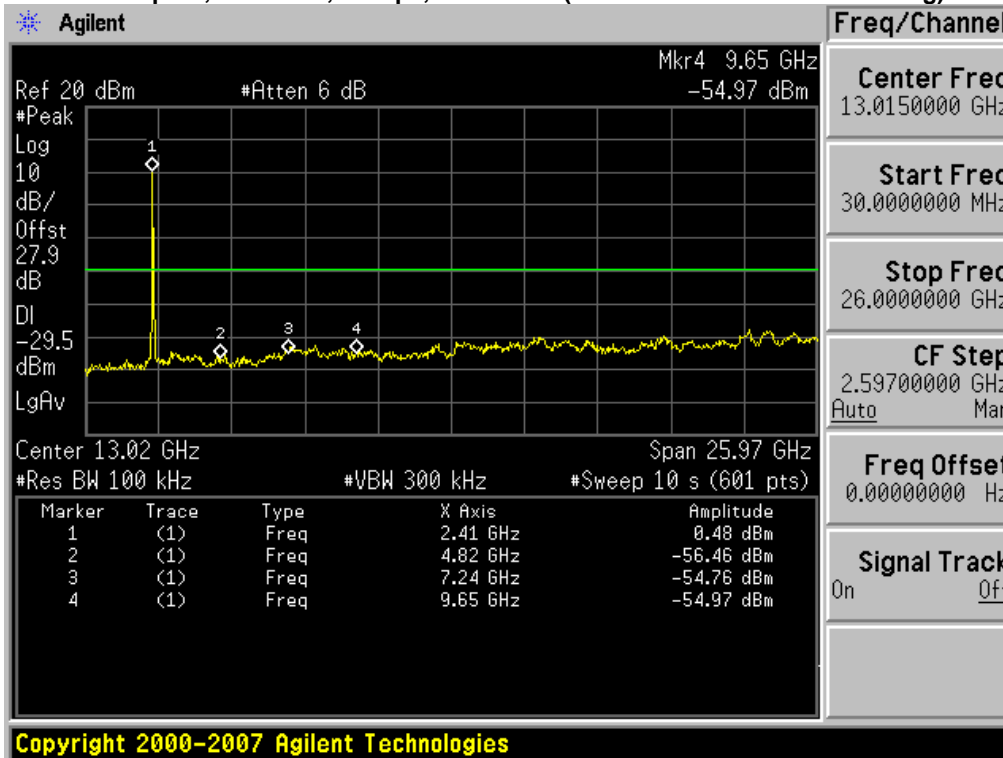




Conducted Spurs, 2412 MHz, m0, HT20 (with and without Beam Forming / STBC)

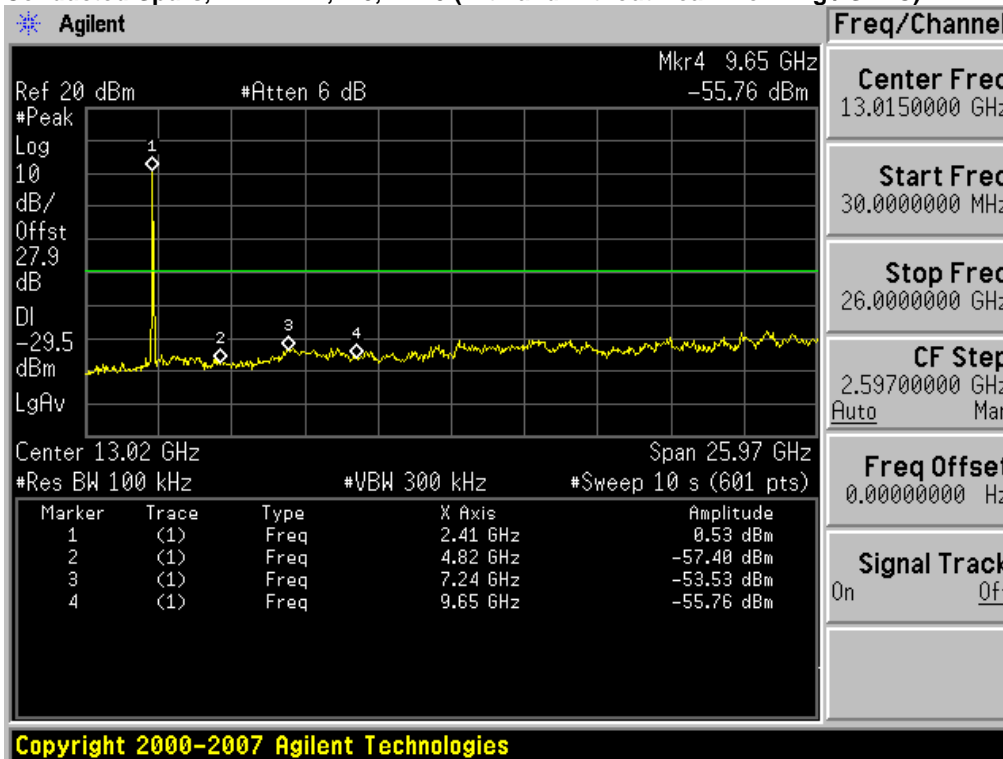


Conducted Spurs, 2437 MHz, 11 Mbps, Legacy CCK

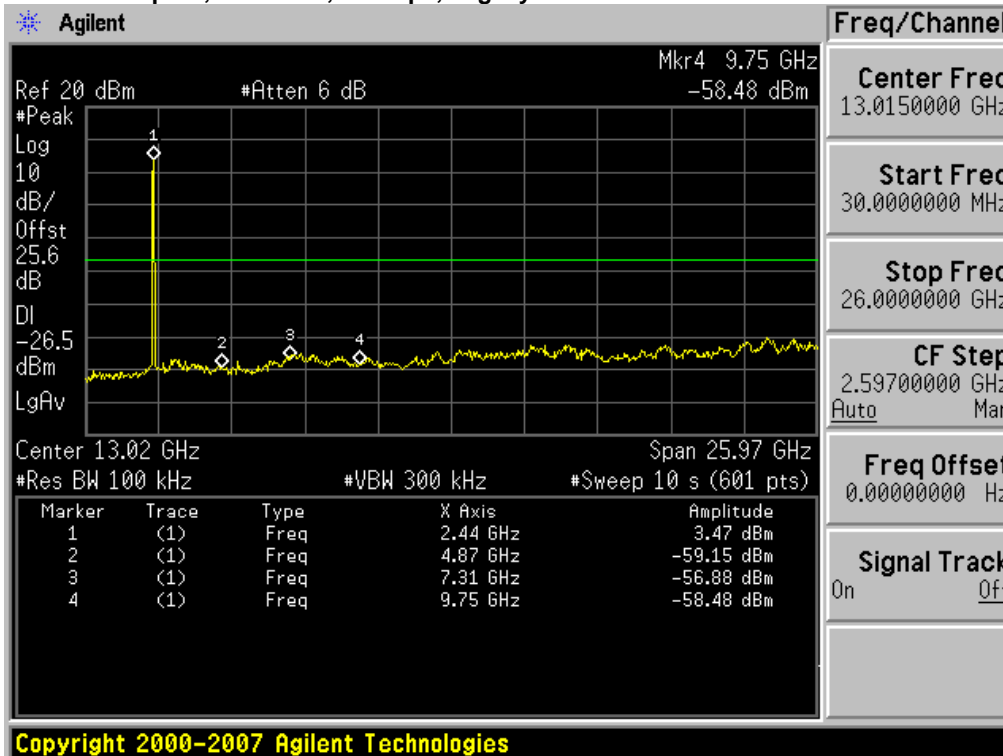




Conducted Spurs, 2437 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

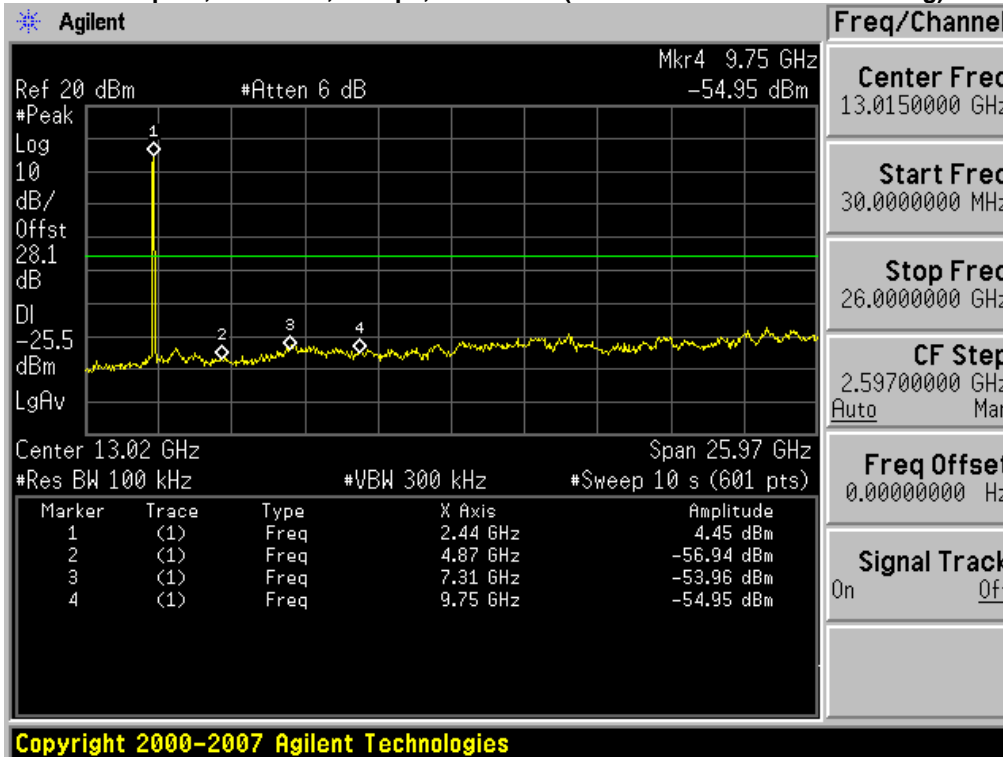


Conducted Spurs, 2437 MHz, m0, HT20 (with and without Beam Forming / STBC)

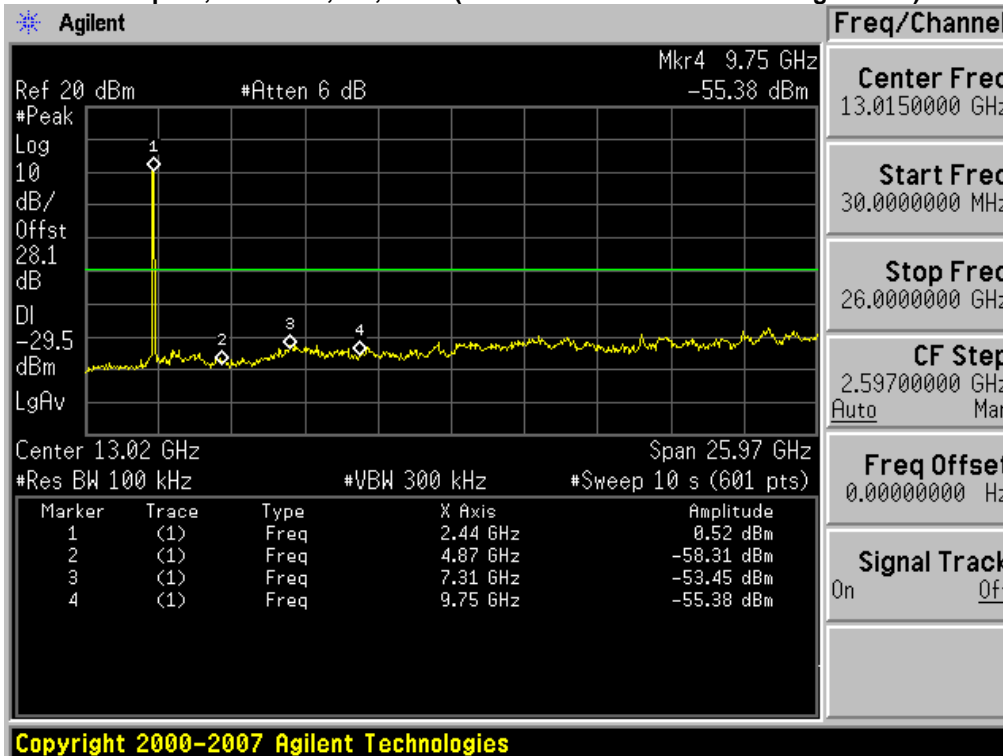




Conducted Spurs, 2462 MHz, 11 Mbps, Legacy CCK

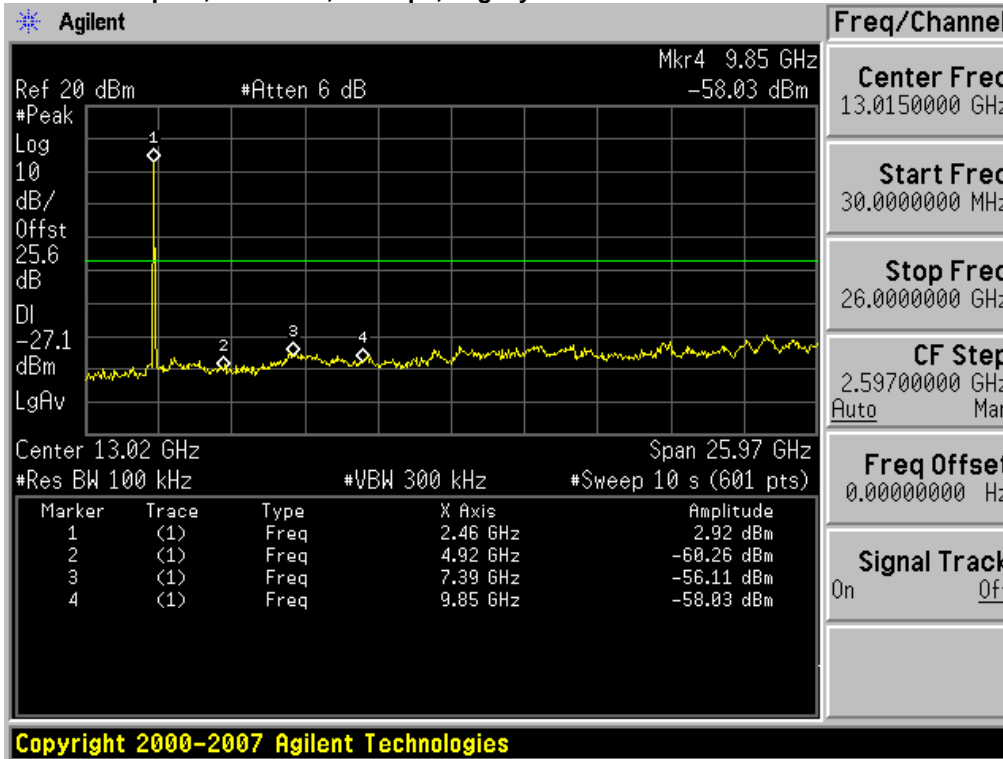


Conducted Spurs, 2462 MHz, 6 Mbps, Non HT-20 (with and without Beam Forming)

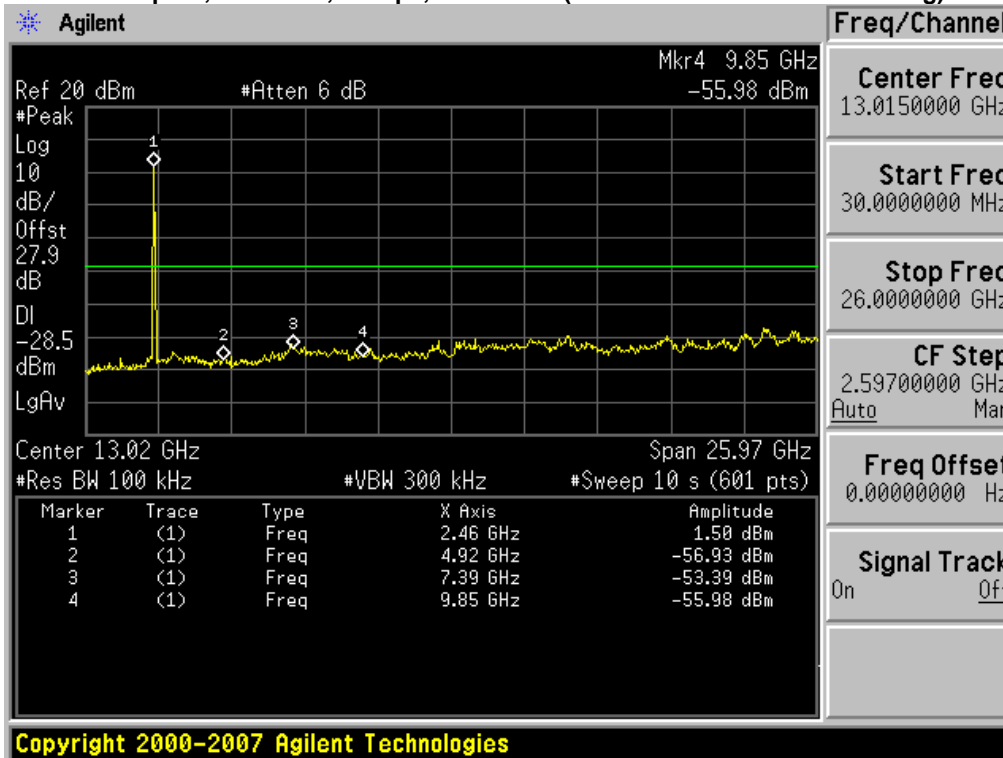




Conducted Spurs, 2462 MHz, m0, HT20 (with and without Beam Forming / STBC)

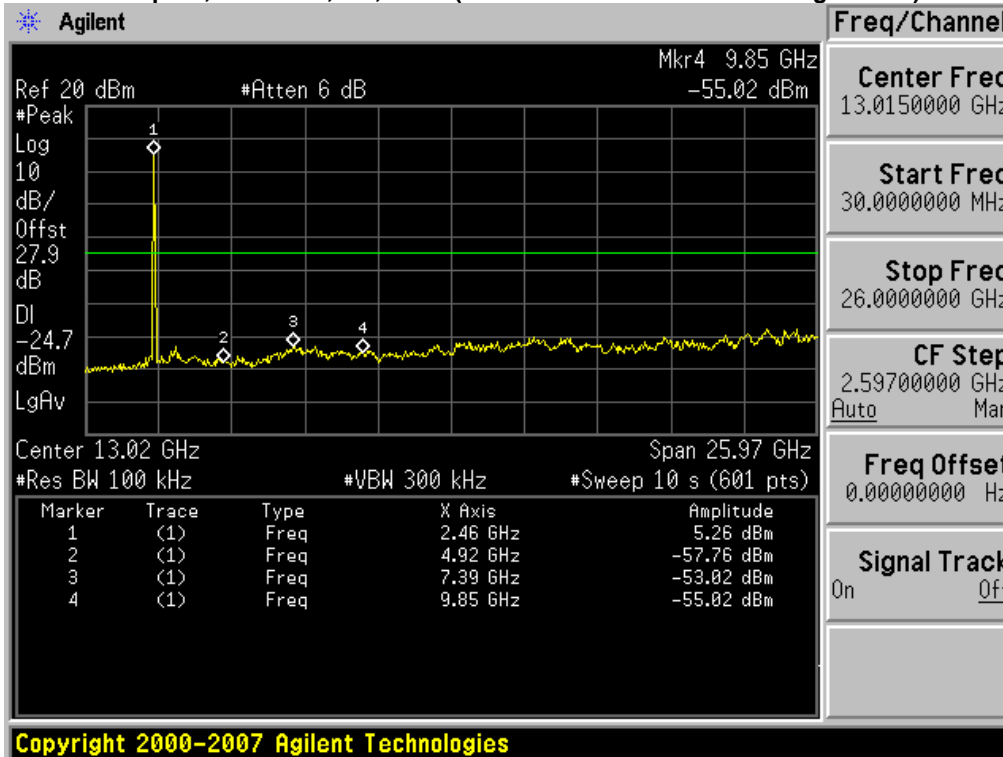


Conducted Spurs, 2412/2432 MHz, 6 Mbps, Non HT-40 Duplicate

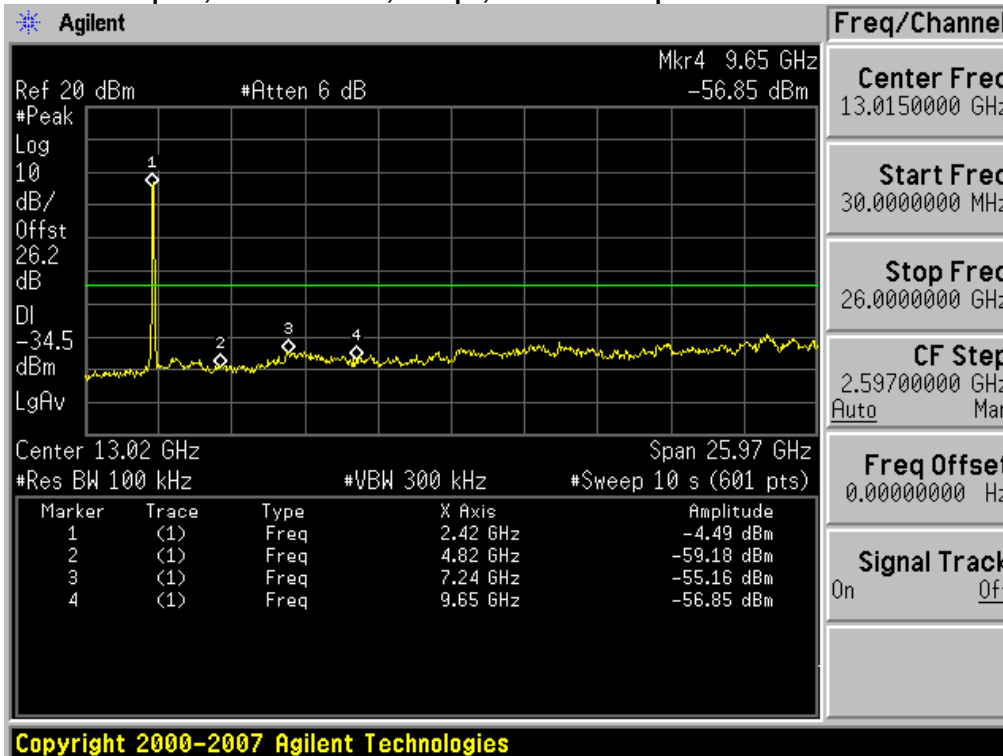




Conducted Spurs, 2412/2432 MHz, m0, HT-40 (with and without Beam Forming / STBC)

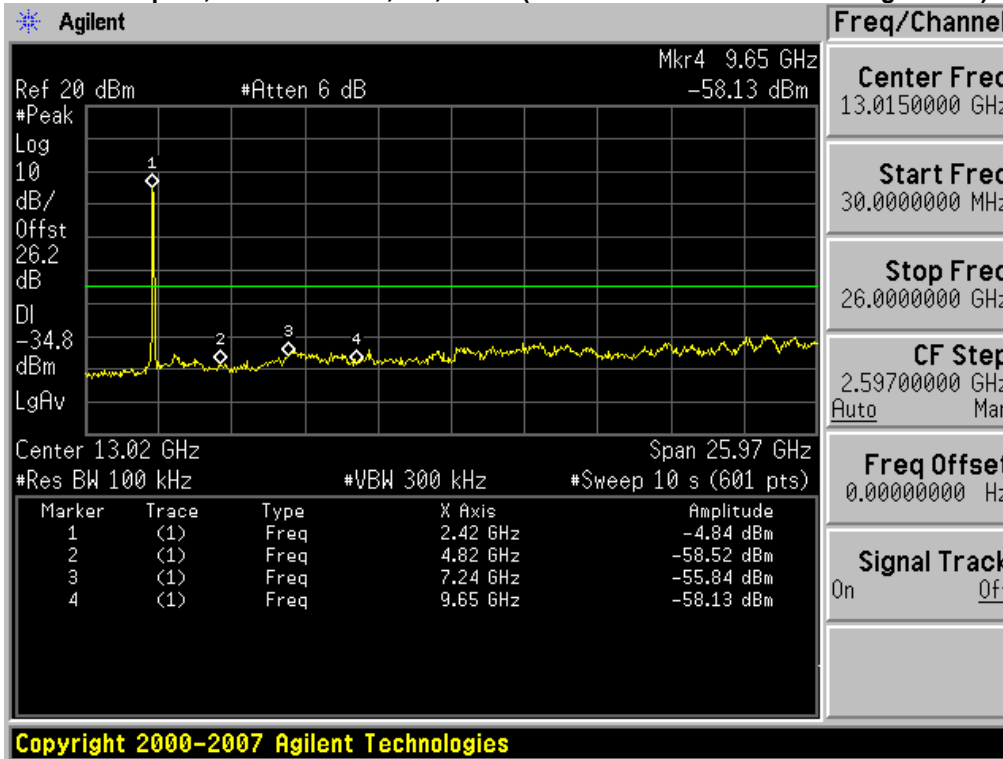


Conducted Spurs, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate

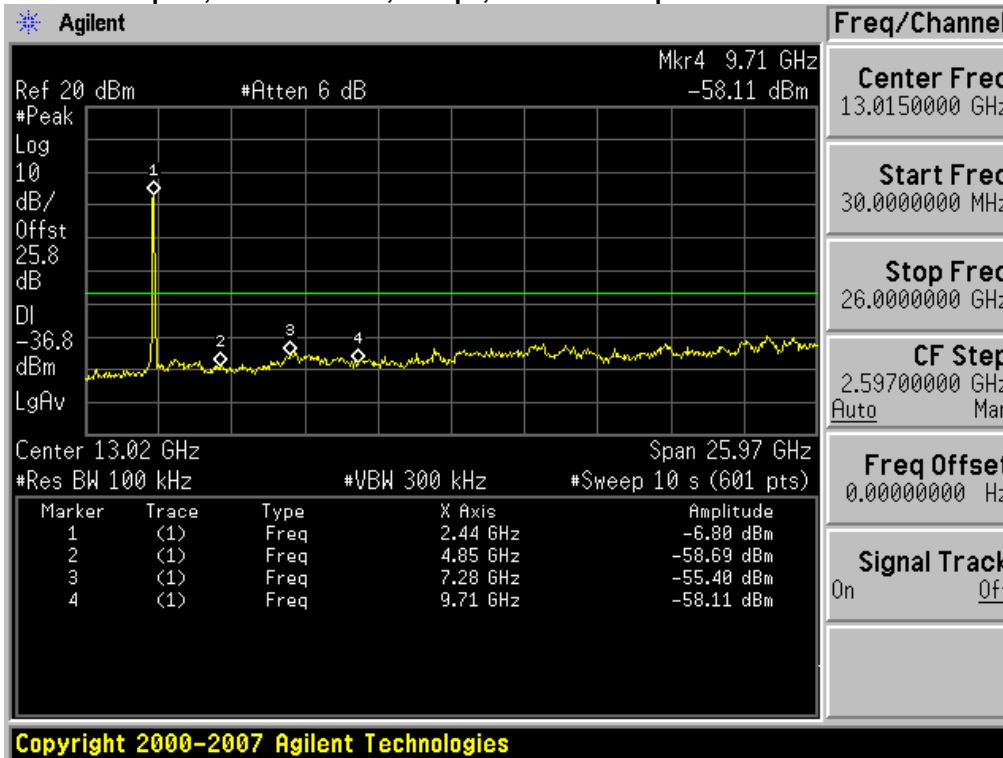




Conducted Spurs, 2427/2447 MHz, m0, HT-40 (with and without Beam Forming / STBC)

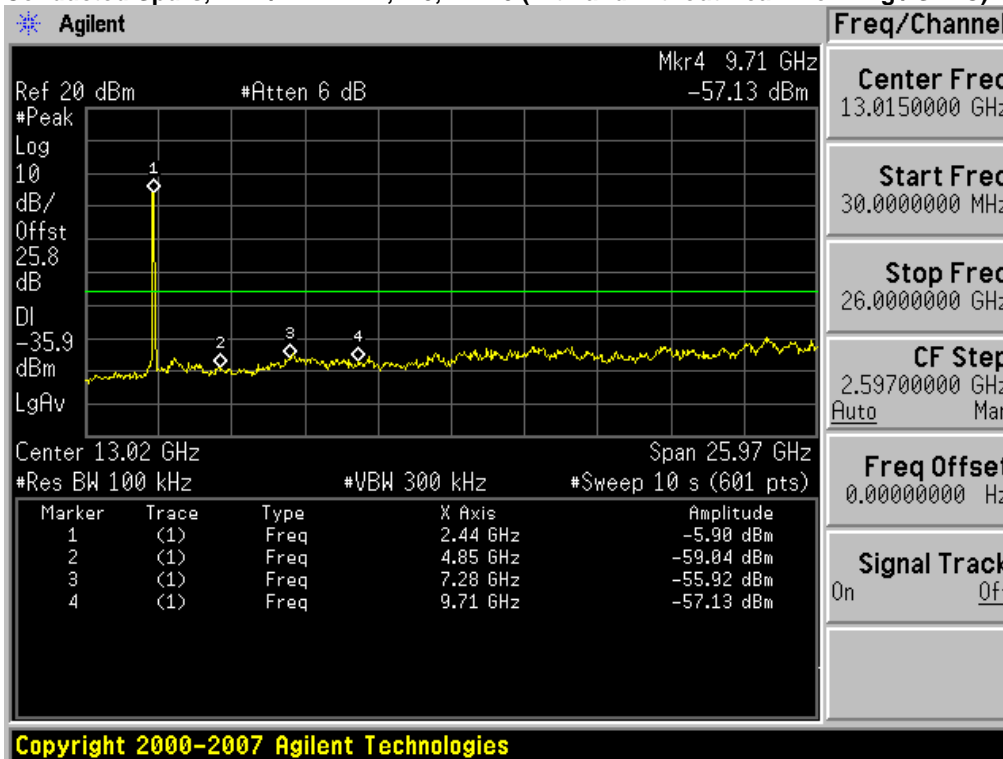



Conducted Spurs, 2442/2462 MHz, 6 Mbps, Non HT-40 Duplicate

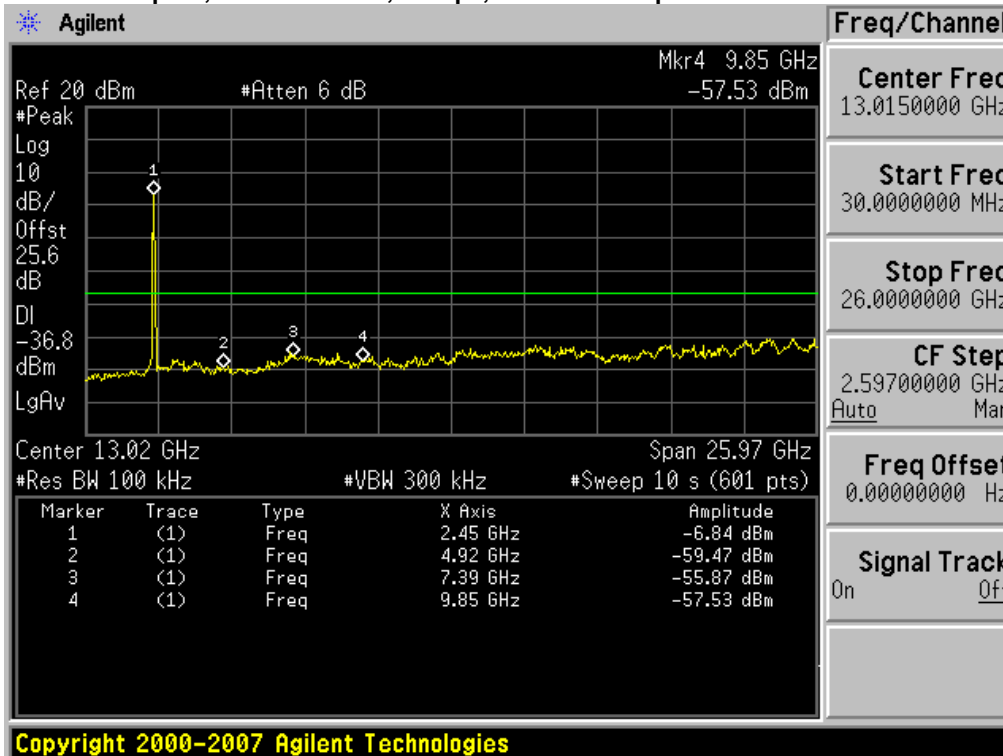



Conducted Spurs, 2442/2462 MHz, m0, HT-40 (with and without Beam Forming / STBC)

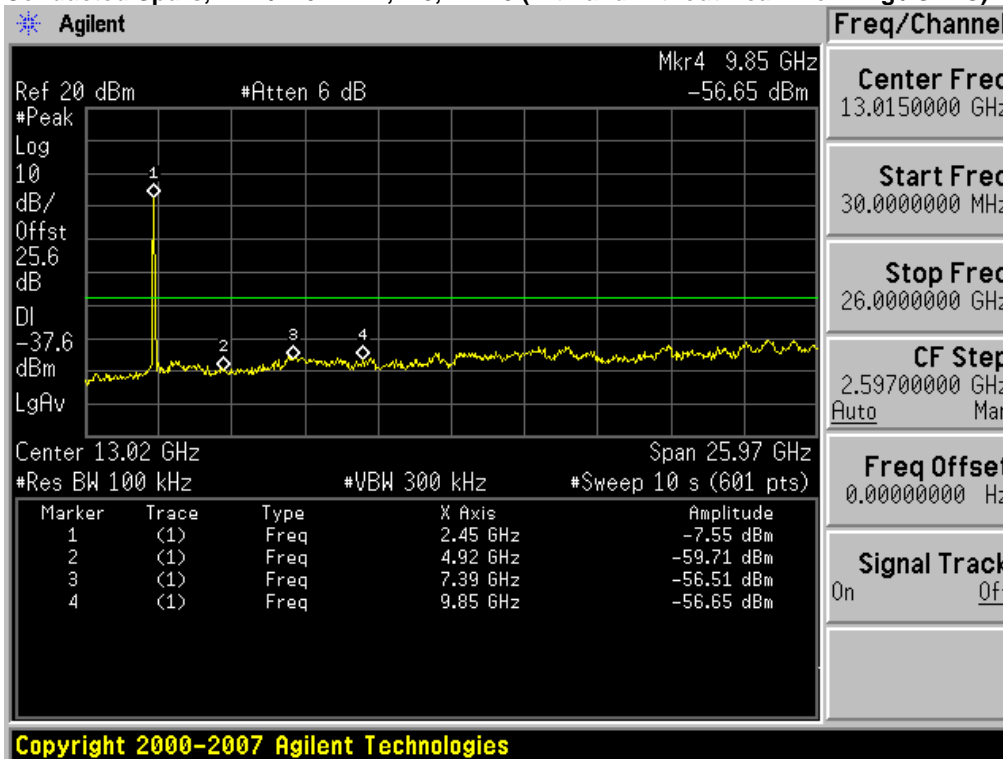

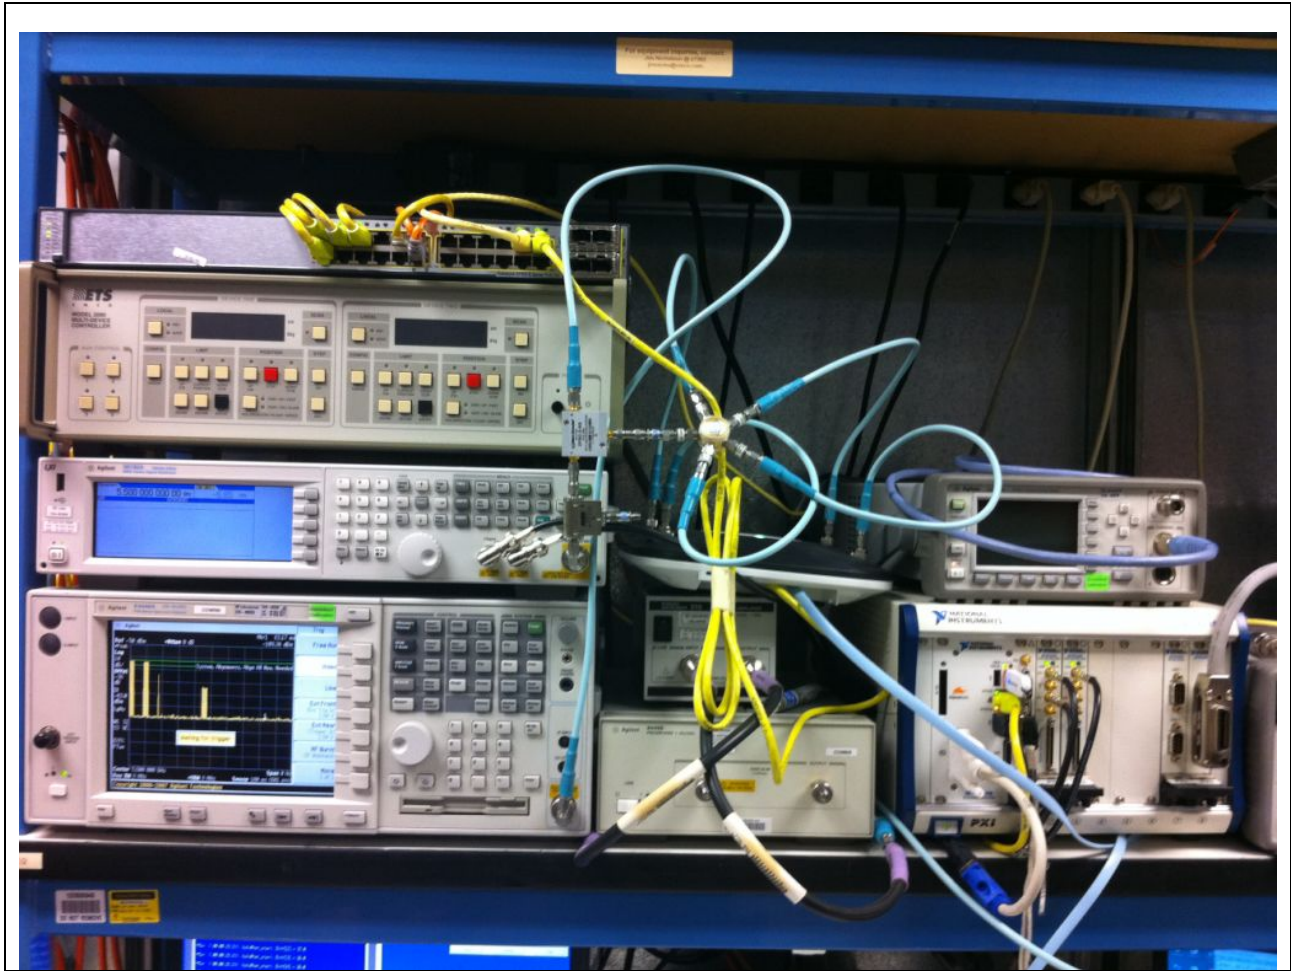

Title: Conducted Test Setup



Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Bandedge

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

| | |
|-----------------------|-----------------------------------|
| Reference Level: | 110 dBuV |
| Attenuation: | 20 dB |
| Sweep Time: | Coupled |
| Resolution Bandwidth: | 1MHz |
| Video Bandwidth: | 1 MHz for peak, 10 Hz for average |
| Detector: | Peak |

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas.




51.2


| Frequency (MHz) | Operating Mode | Tx Paths | Radiated Bandedge Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|--------------------------------------|----------|----------------------------------|----------------|-------------|
| 2412 | Legacy CCK, 1 to 11 Mbps | 4 | 52.1 | 54 | 1.9 |
| | Non HT-20, 6 to 54 Mbps | 4 | 54.0 | 54 | 0.0 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 4 | 53.6 | 54 | 0.4 |
| | HT-20, M0 to M23 | 4 | 53.2 | 54 | 0.8 |
| | HT-20 STBC, M0 to M7 | 4 | 53.2 | 54 | 0.8 |
| | HT-20 Beam Forming, M0 to M7 | 4 | 52.6 | 54 | 1.4 |
| | HT-20 Beam Forming, M8 to M15 | 4 | 53.7 | 54 | 0.3 |
| | HT-20 Beam Forming, M16 to M23 | 4 | 53.7 | 54 | 0.3 |
| 2462 | Legacy CCK, 1 to 11 Mbps | 4 | 52.6 | 54 | 1.4 |
| | Non HT-20, 6 to 54 Mbps | 4 | 53.8 | 54 | 0.2 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 4 | 52.7 | 54 | 1.3 |
| | HT-20, M0 to M23 | 4 | 51.4 | 54 | 2.6 |
| | HT-20 STBC, M0 to M7 | 4 | 51.4 | 54 | 2.6 |
| | HT-20 Beam Forming, M0 to M7 | 4 | 50.6 | 54 | 3.4 |
| | HT-20 Beam Forming, M8 to M15 | 4 | 52.2 | 54 | 1.8 |
| | HT-20 Beam Forming, M16 to M23 | 4 | 53.1 | 54 | 0.9 |
| 2412/2432 | Non HT-40 Duplicate, 6-54 Mbps | 4 | 53.0 | 54 | 1.0 |
| | HT-40, M0 to M23 | 4 | 54.0 | 54 | 0.0 |
| | HT-40 STBC, M0 to M7 | 4 | 54.0 | 54 | 0.0 |
| | HT-40 Beam Forming, M0 to M7 | 4 | 52.7 | 54 | 1.3 |
| | HT-40 Beam Forming, M8 to M15 | 4 | 52.4 | 54 | 1.6 |
| | HT-40 Beam Forming, M16 to M23 | 4 | 52.4 | 54 | 1.6 |
| 2442/2462 | Non HT-40 Duplicate, 6-54 Mbps | 4 | 52.5 | 54 | 1.5 |
| | HT-40, M0 to M23 | 4 | 52.3 | 54 | 1.8 |
| | HT-40 STBC, M0 to M7 | 4 | 52.3 | 54 | 1.7 |
| | HT-40 Beam Forming, M0 to M7 | 4 | 49.9 | 54 | 4.1 |
| | HT-40 Beam Forming, M8 to M15 | 4 | 51.2 | 54 | 2.8 |
| | HT-40 Beam Forming, M16 to M23 | 4 | 51.7 | 54 | 2.3 |



Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Average

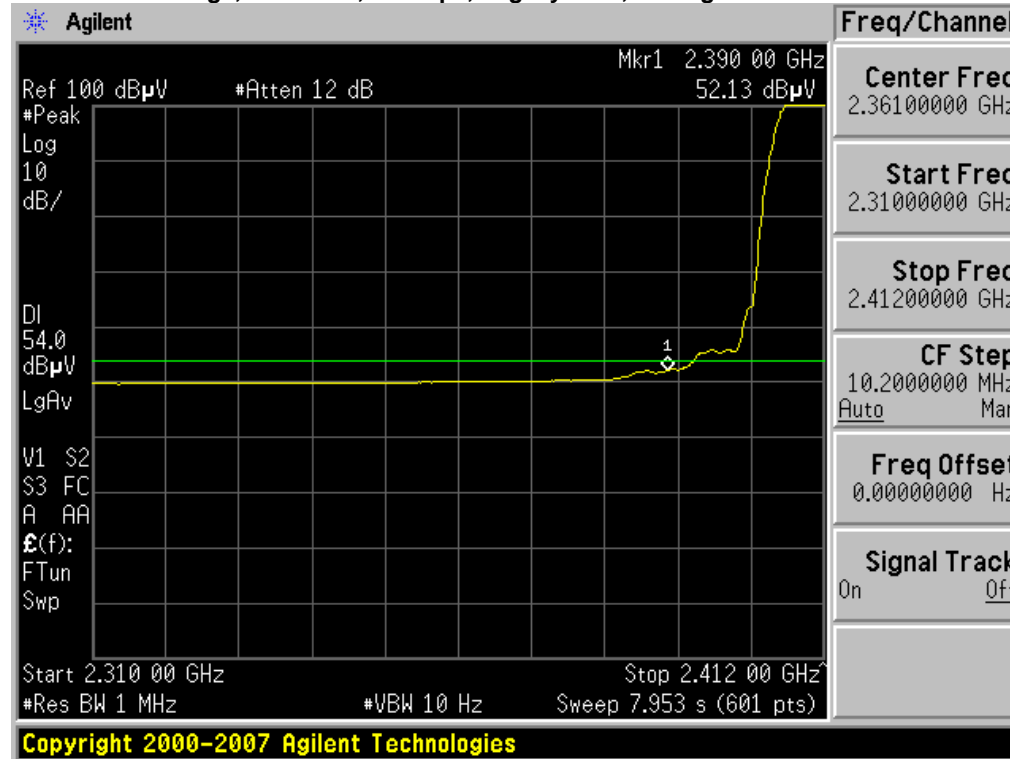


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Average

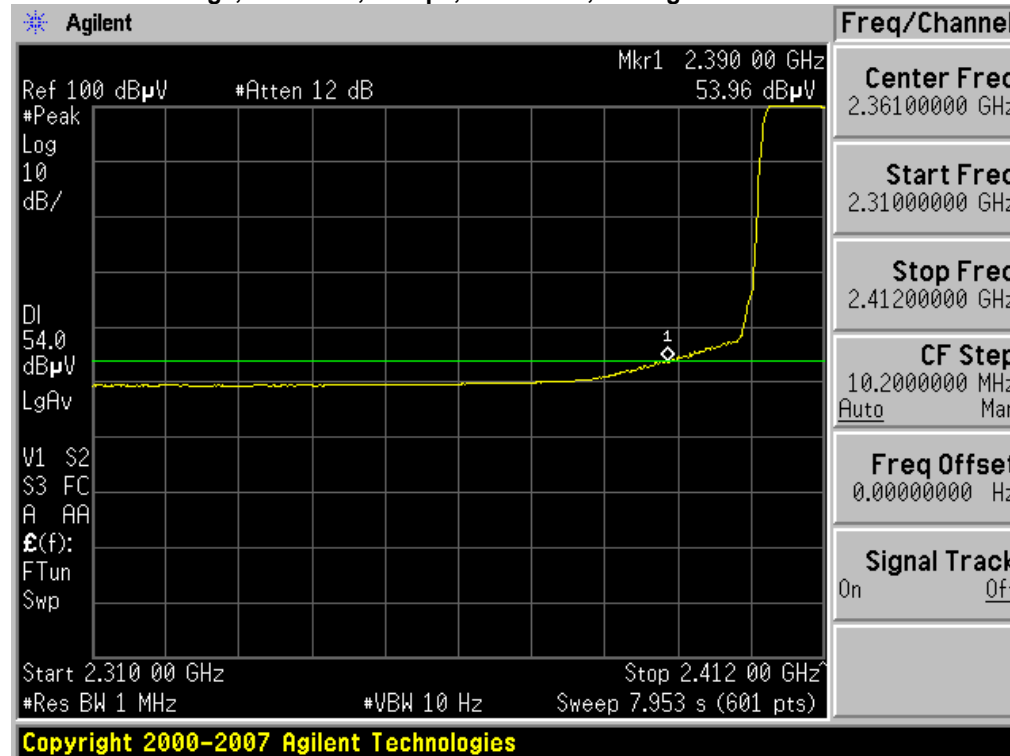




Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Average

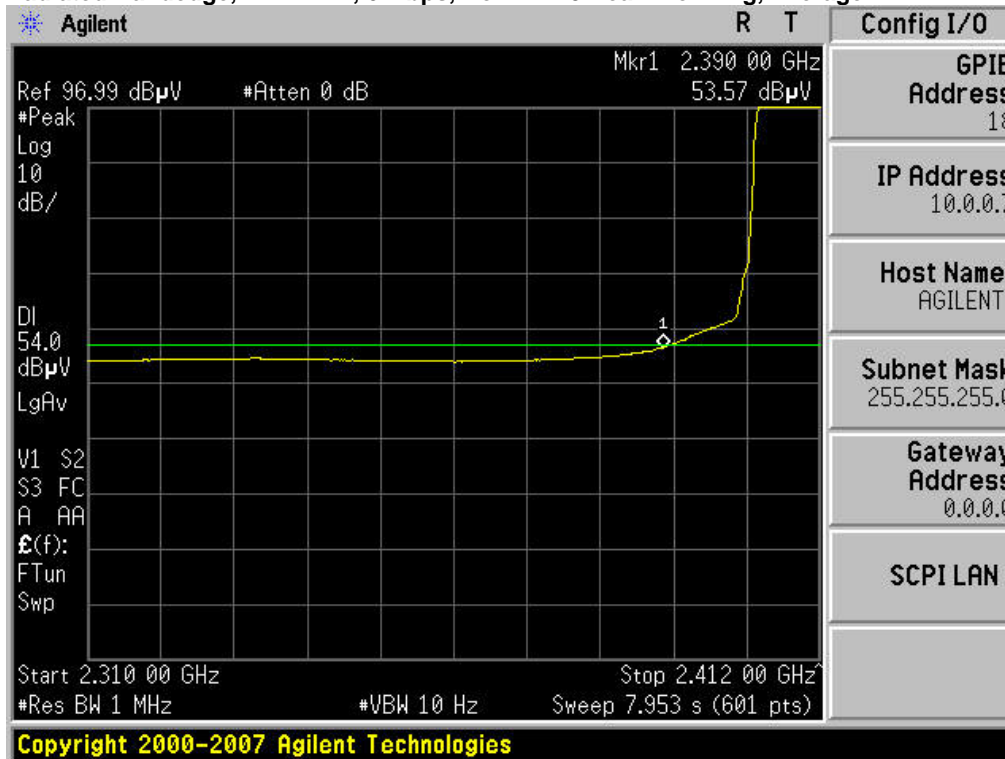


Radiated Bandedge, 2412 MHz, m0, HT20 with and without STBC, Average

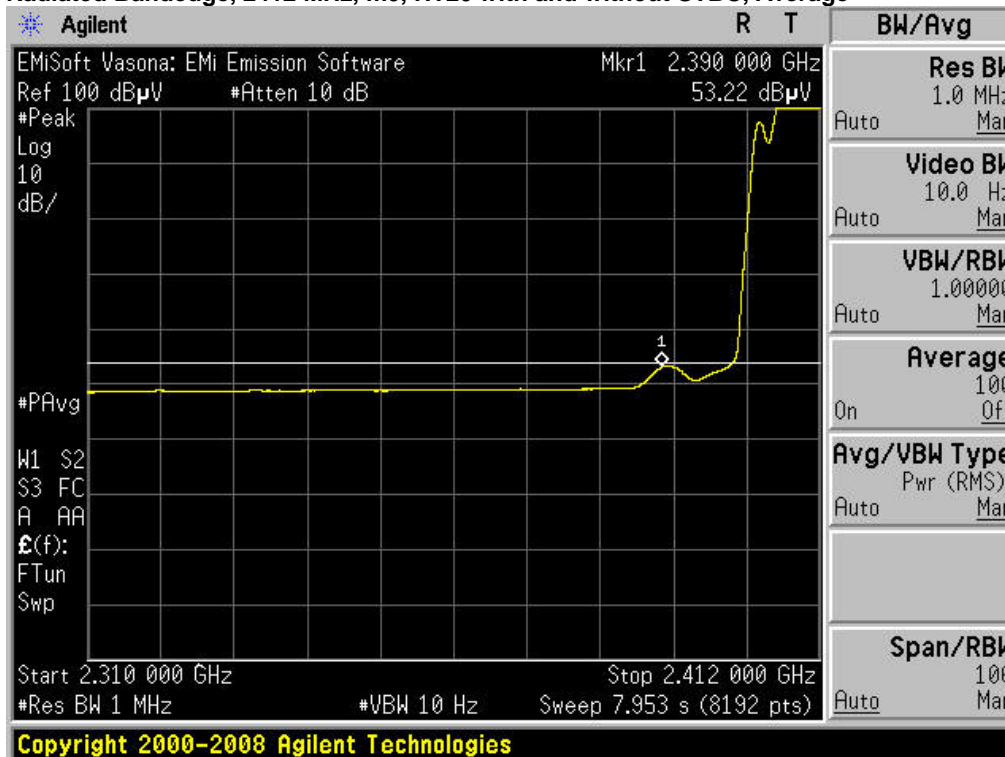




Radiated Bandedge, 2412 MHz, m0, HT20 Beam Forming, Average

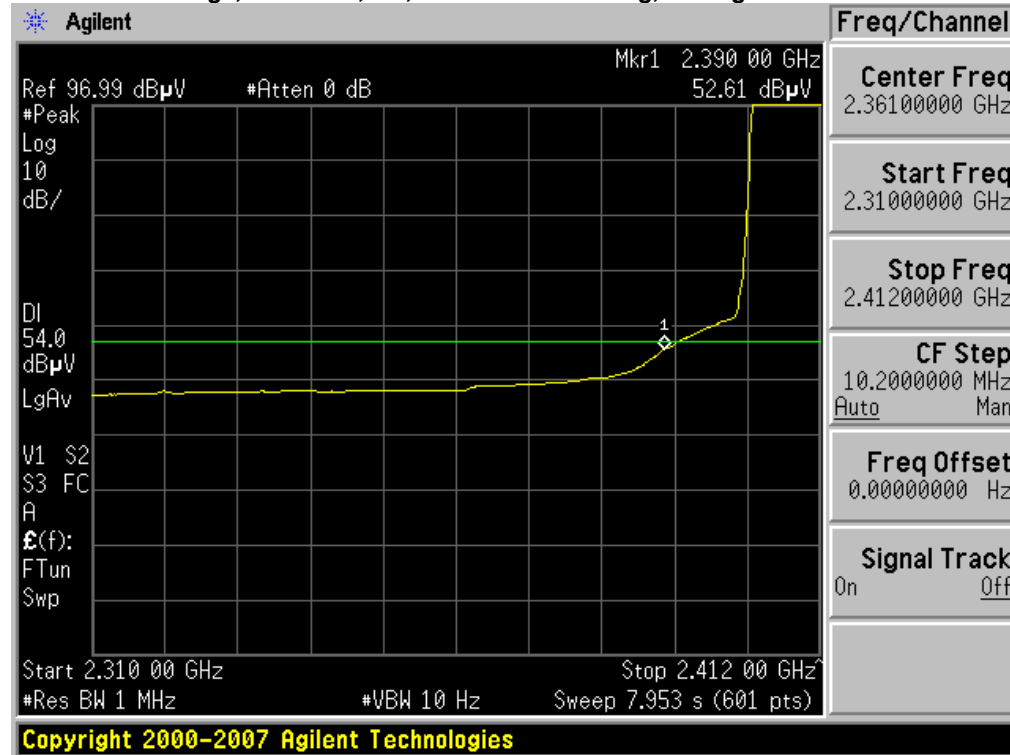


Radiated Bandedge, 2412 MHz, m8, HT20 Beam Forming, Average

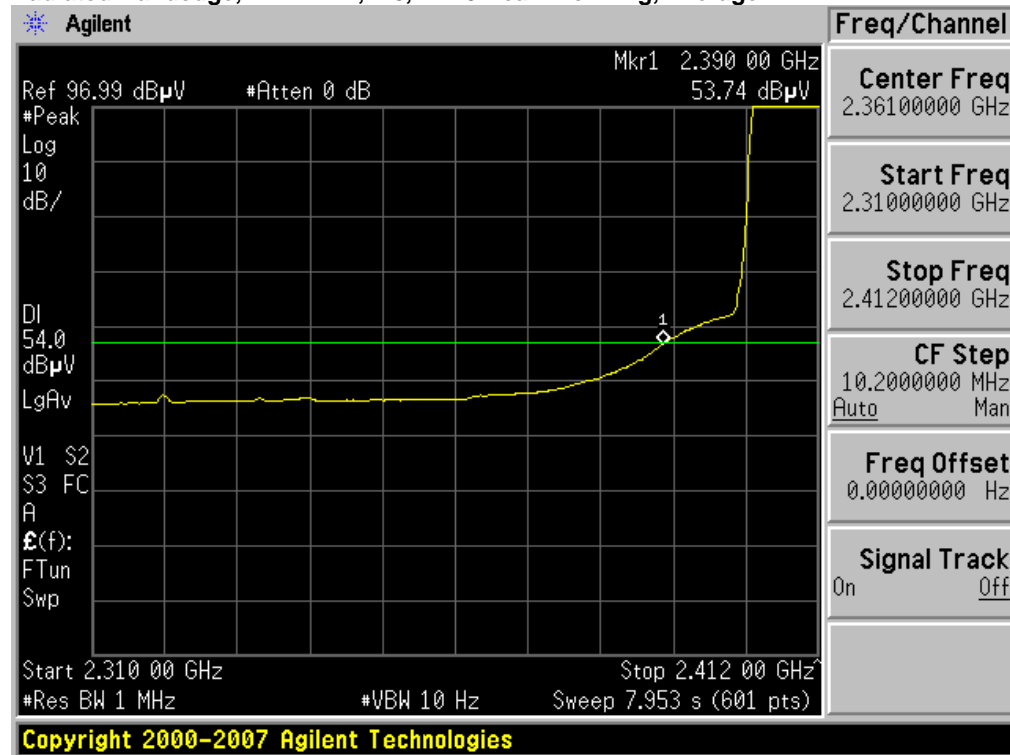




Radiated Bandedge, 2412 MHz, m16, HT20 Beam Forming, Average

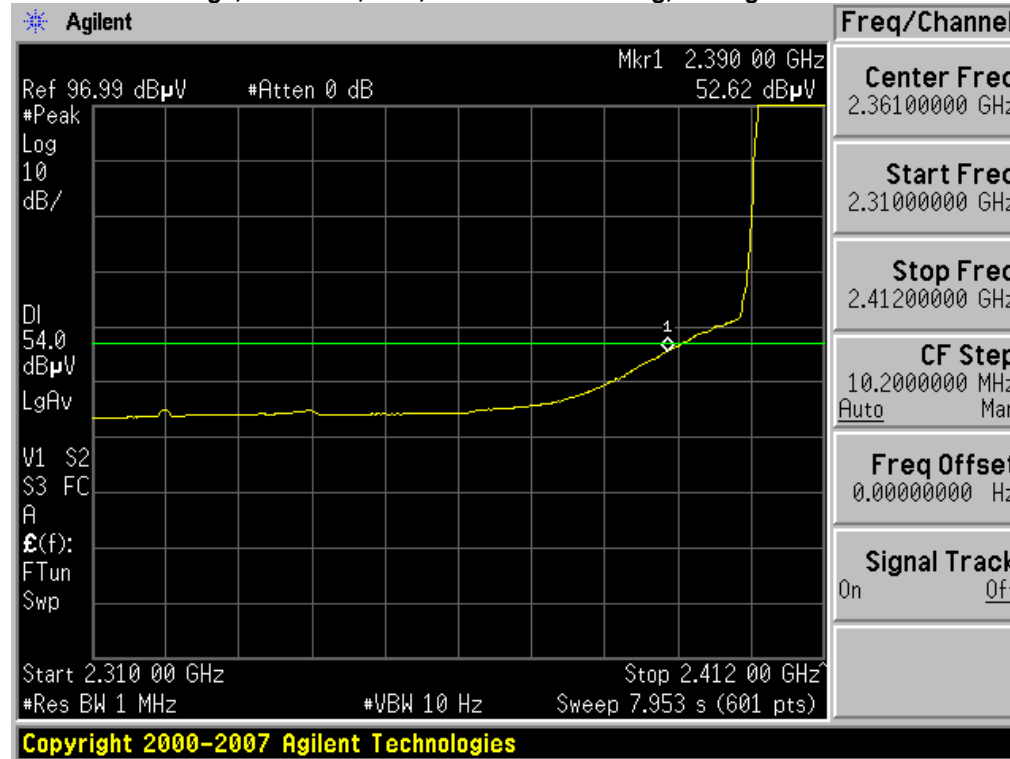


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Average

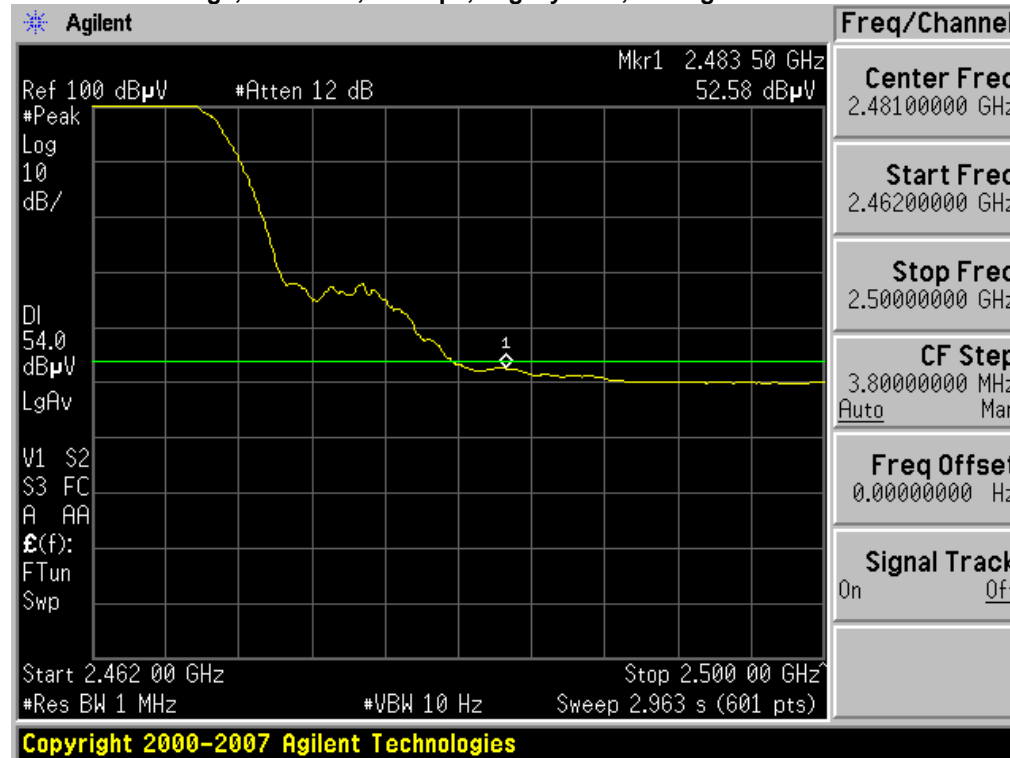




Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20, Average

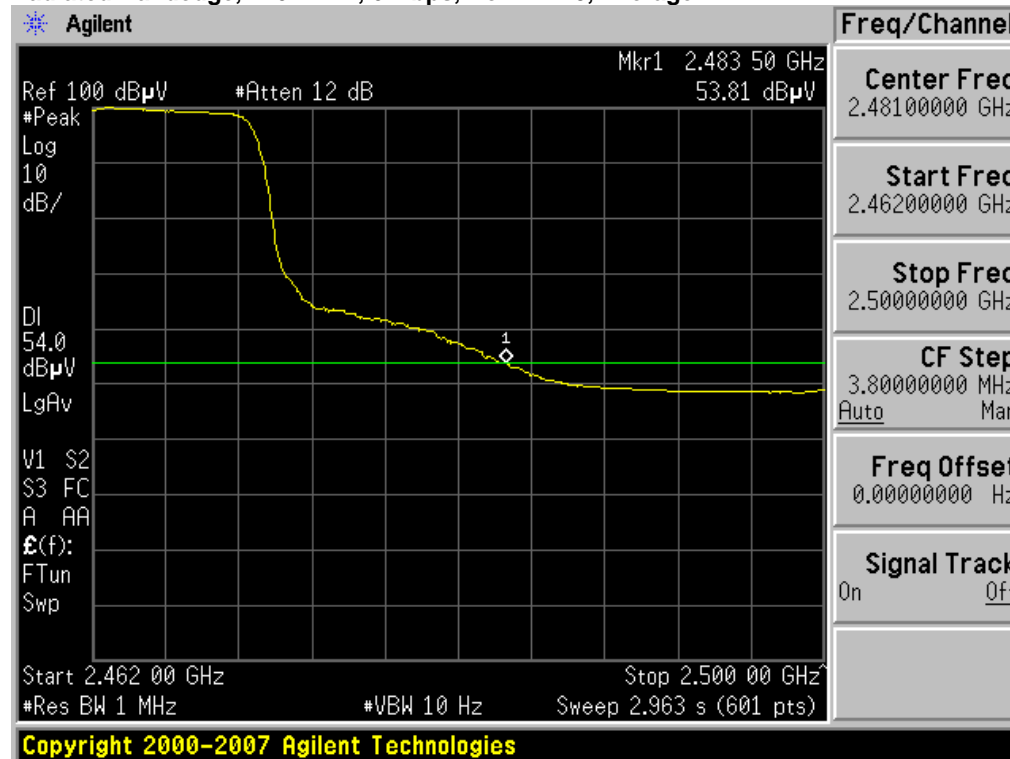


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Average

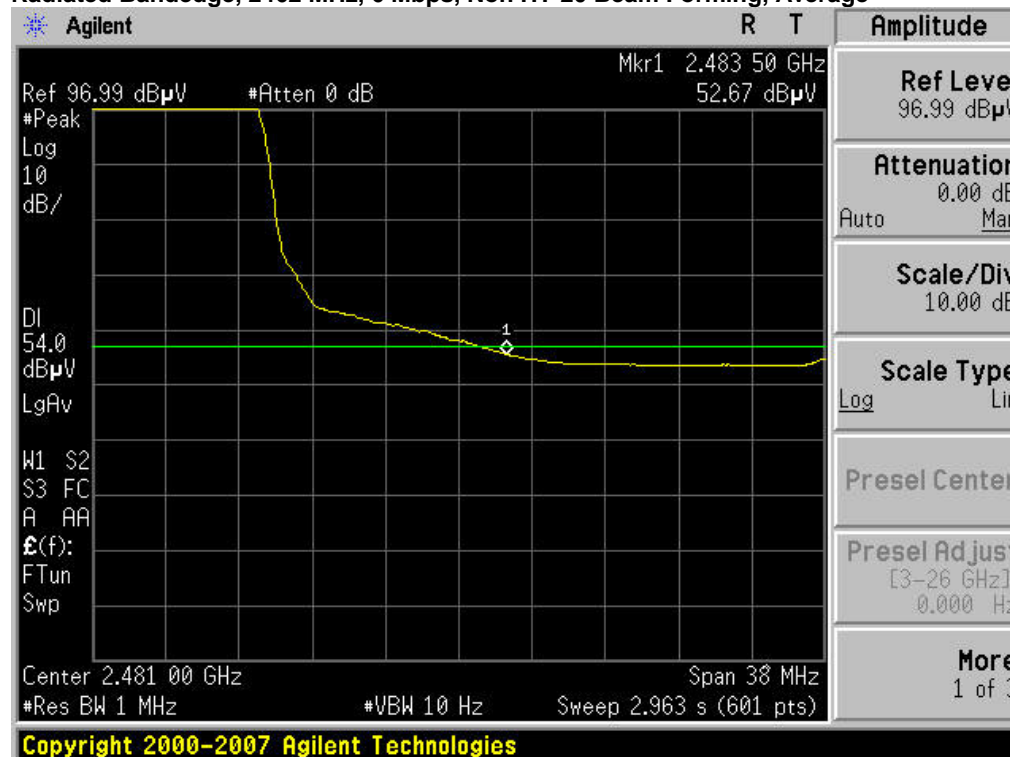




Radiated Bandedge, 2462 MHz, m0, HT20 with and without STBC, Average

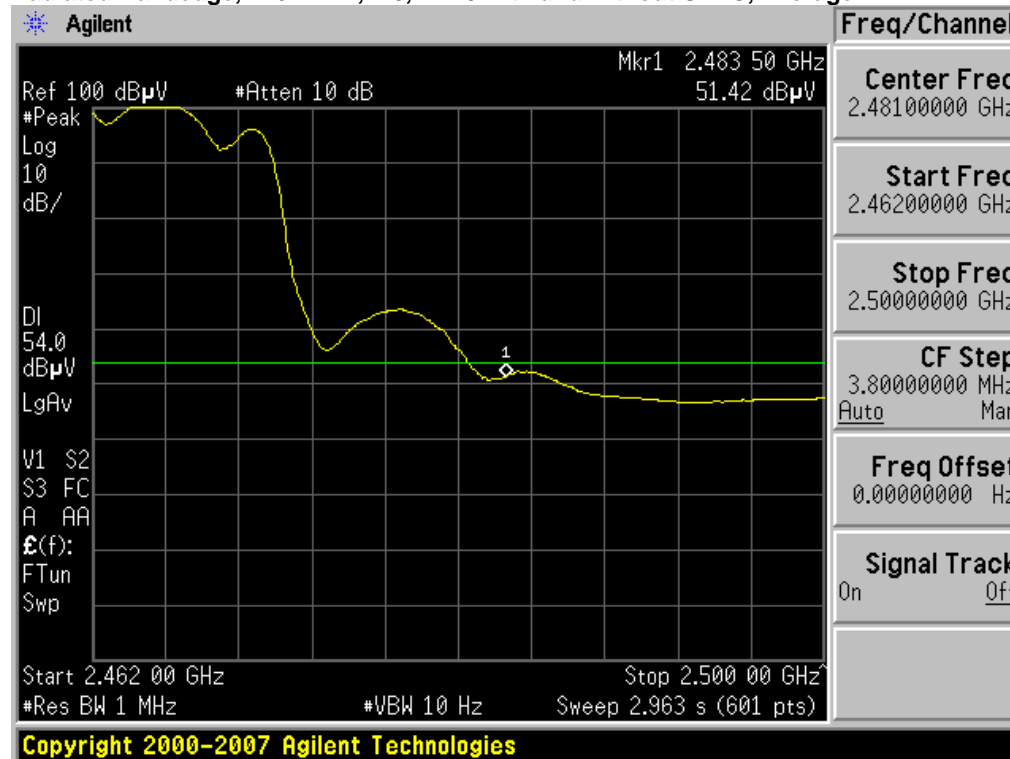


Radiated Bandedge, 2462 MHz, m0, HT20 Beam Forming, Average

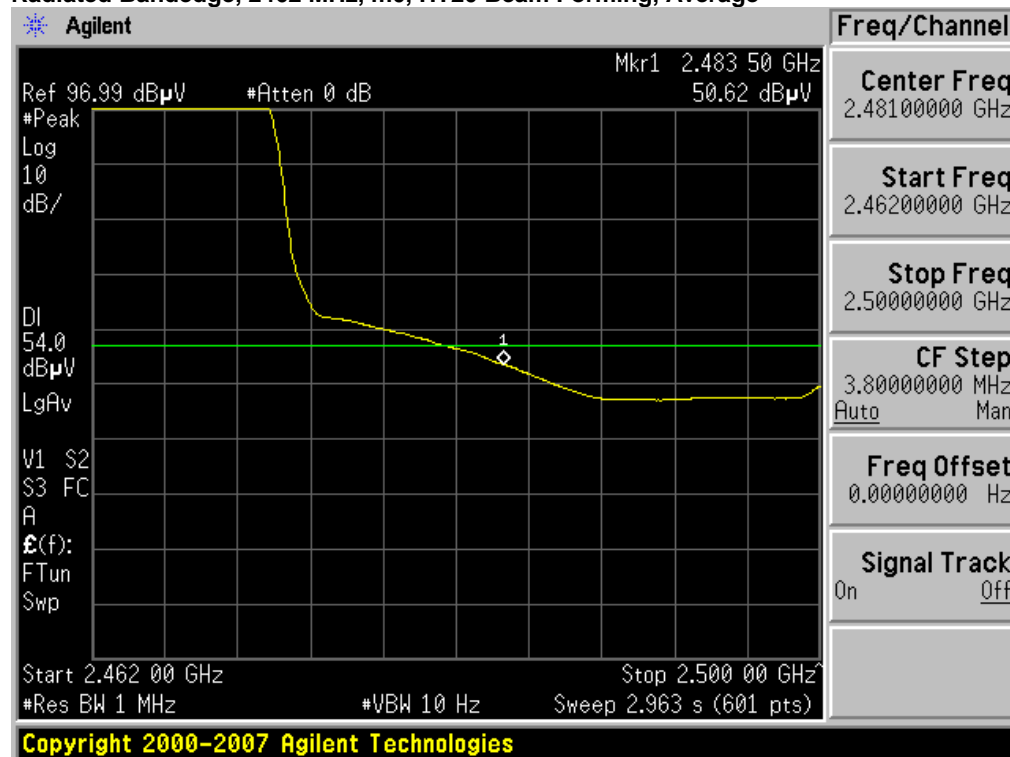



Radiated Bandedge, 2462 MHz, m8, HT20 Beam Forming, Average

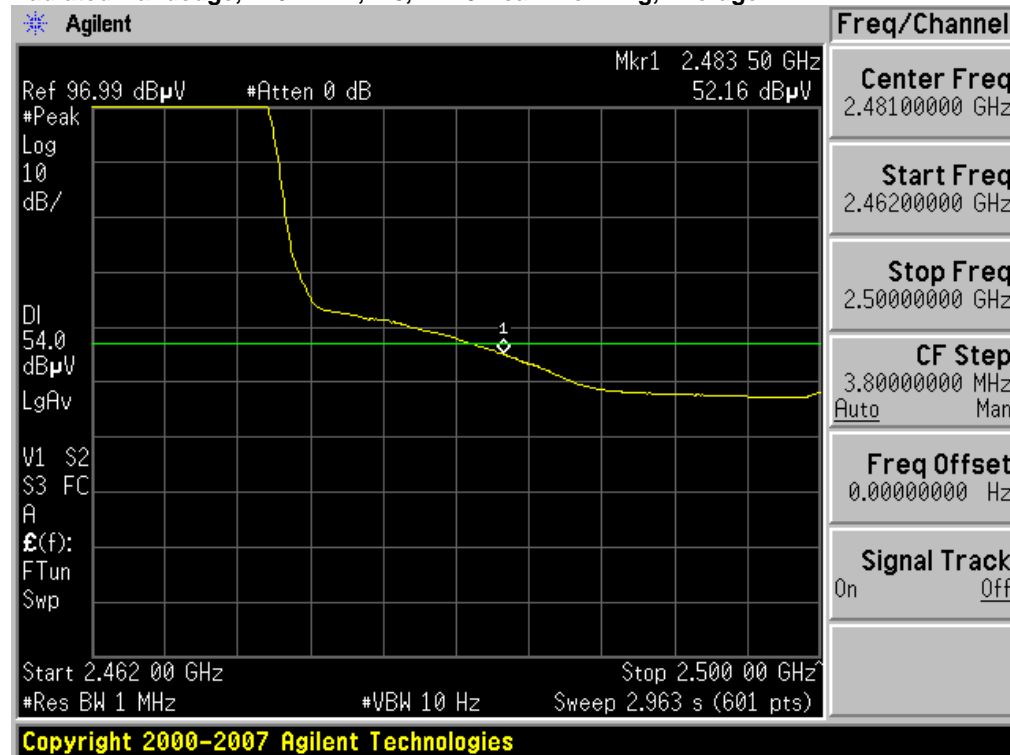


Radiated Bandedge, 2462 MHz, m16, HT20 Beam Forming, Average






Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non-HT40, Average

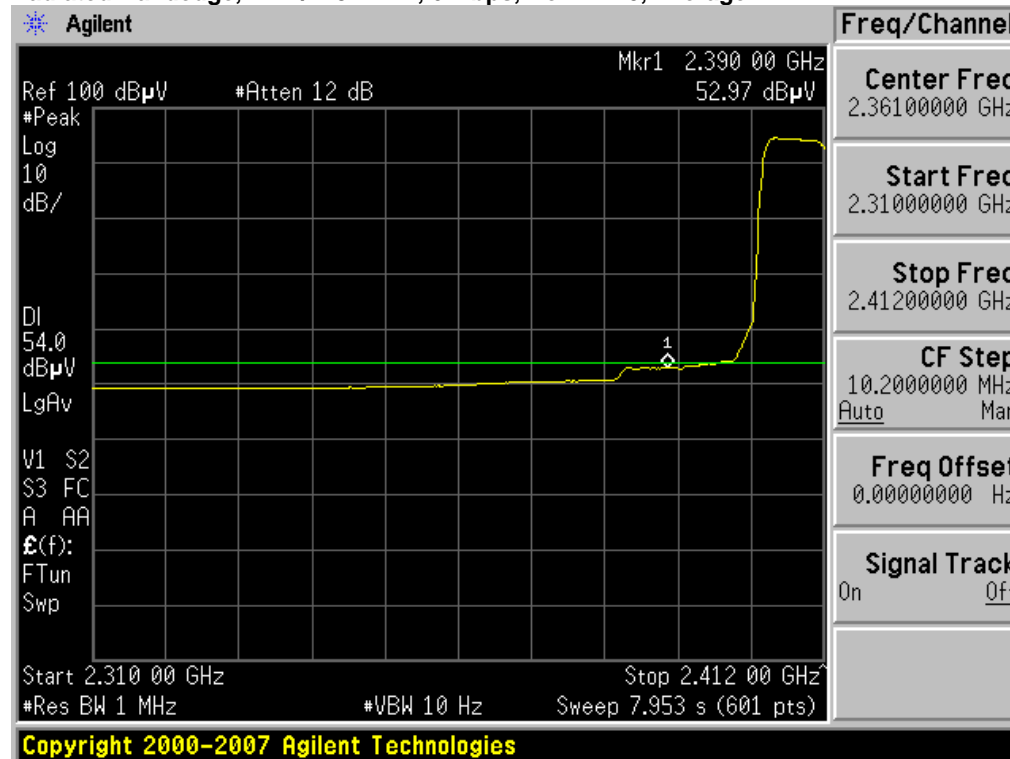


Radiated Bandedge, 2412/2432 MHz, m0, HT40 with and without STBC, Average

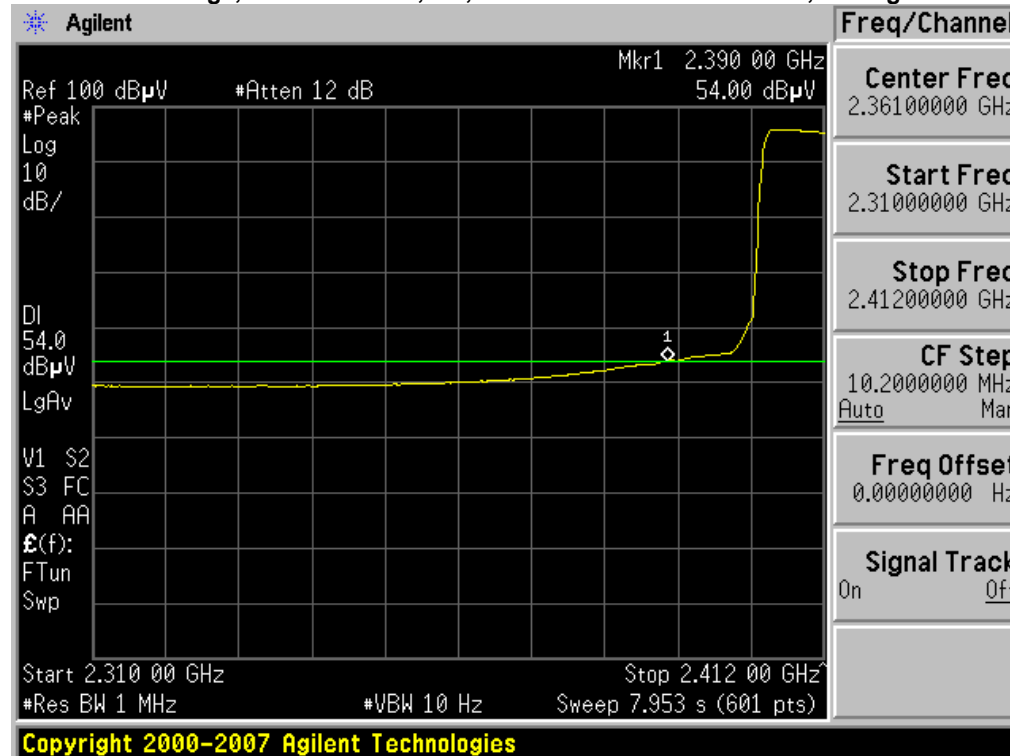




Radiated Bandedge, 2412/2432 MHz, m0, HT40 Beam Forming, Average

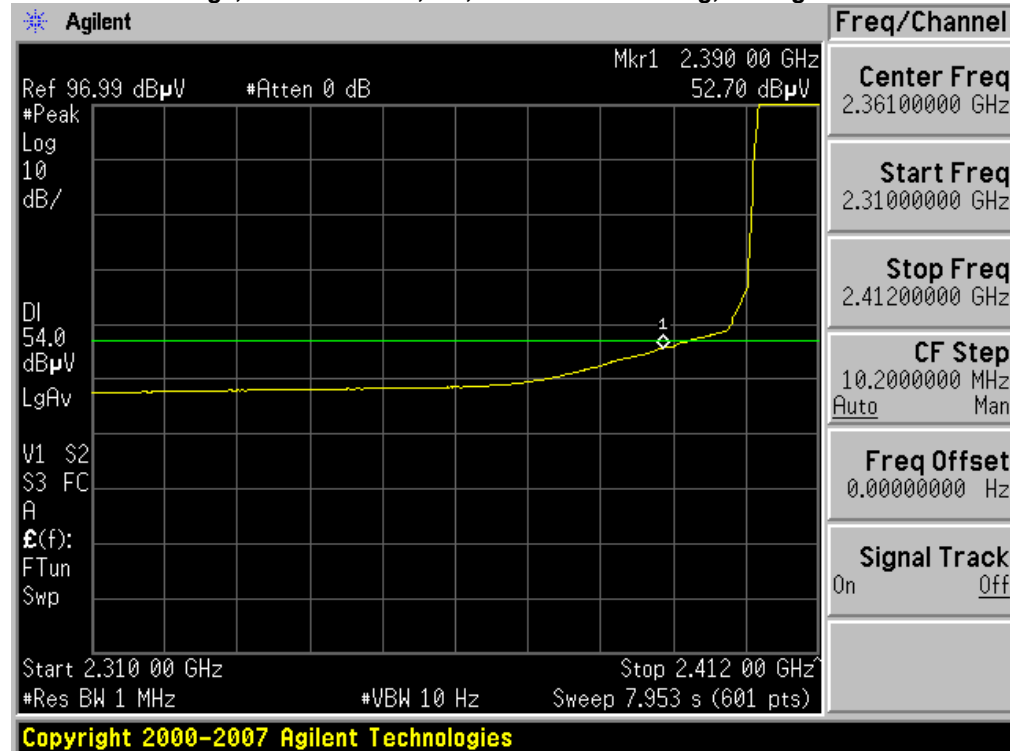


Radiated Bandedge, 2412/2432 MHz, m8, HT40 Beam Forming, Average

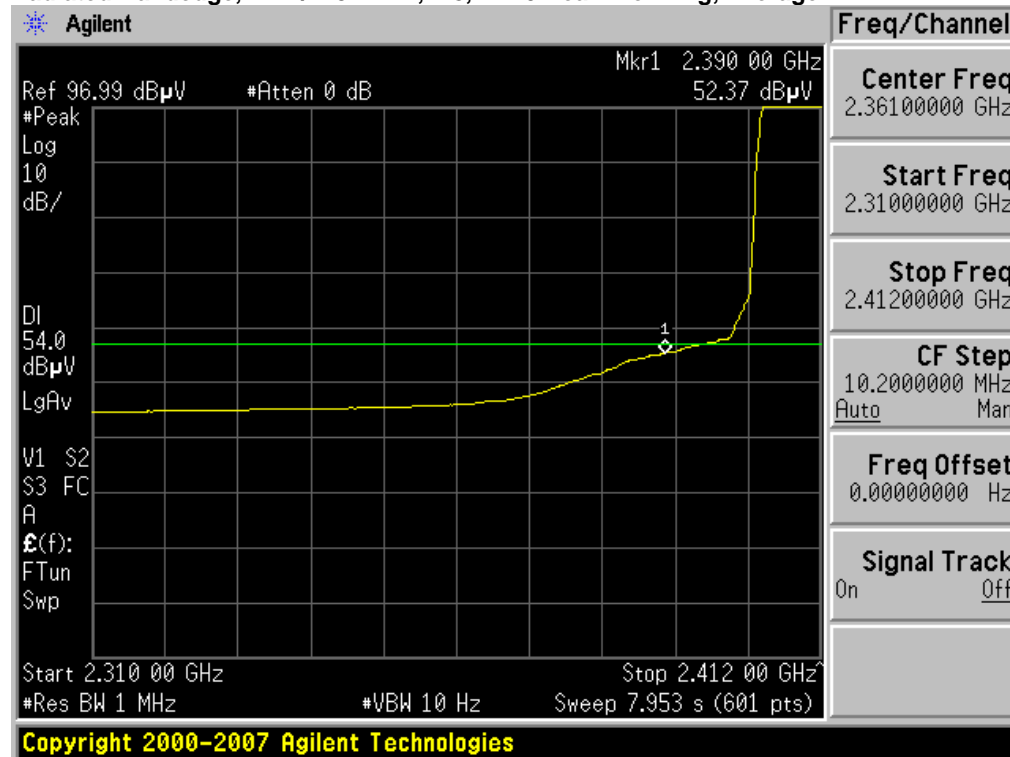




Radiated Bandedge, 2412/2432 MHz, m16, HT40 Beam Forming, Average

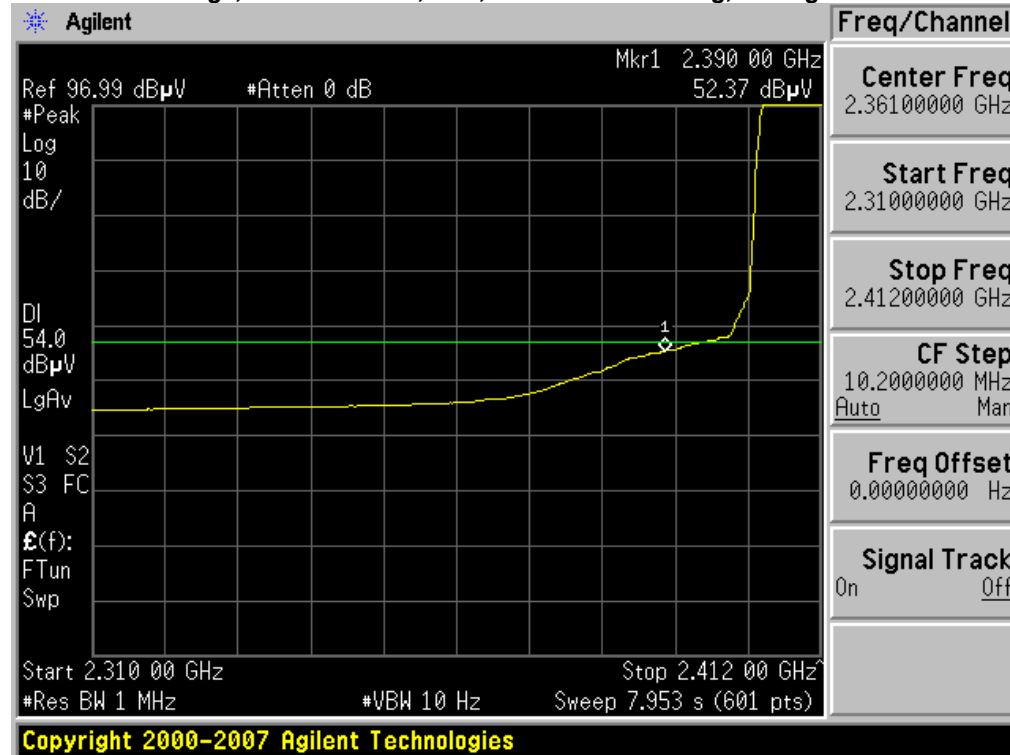




Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non-HT40, Average

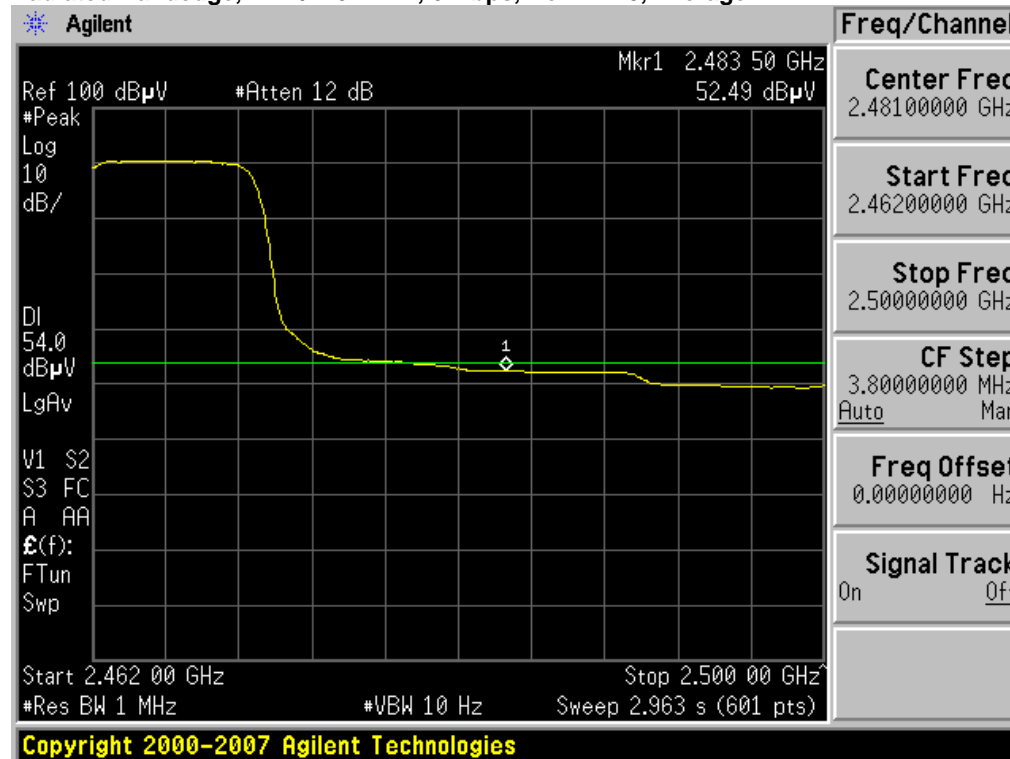


Radiated Bandedge, 2442/2462 MHz, m0, HT40 with and without STBC, Average

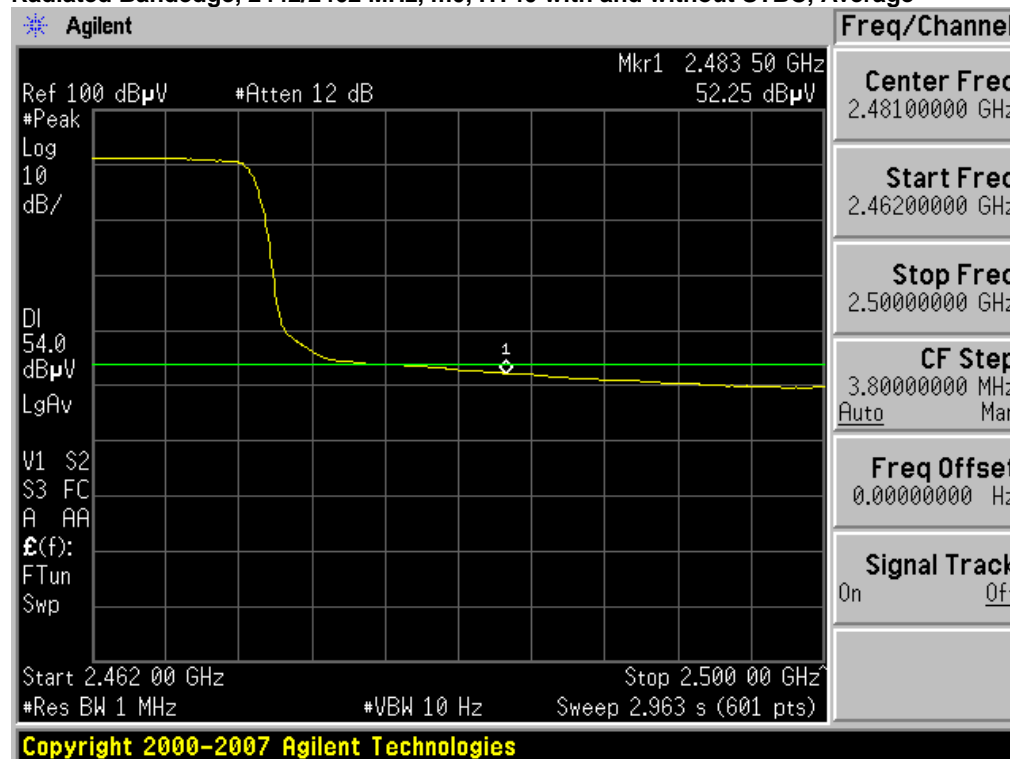




Radiated Bandedge, 2442/2462 MHz, m0, HT40 Beam Forming, Average

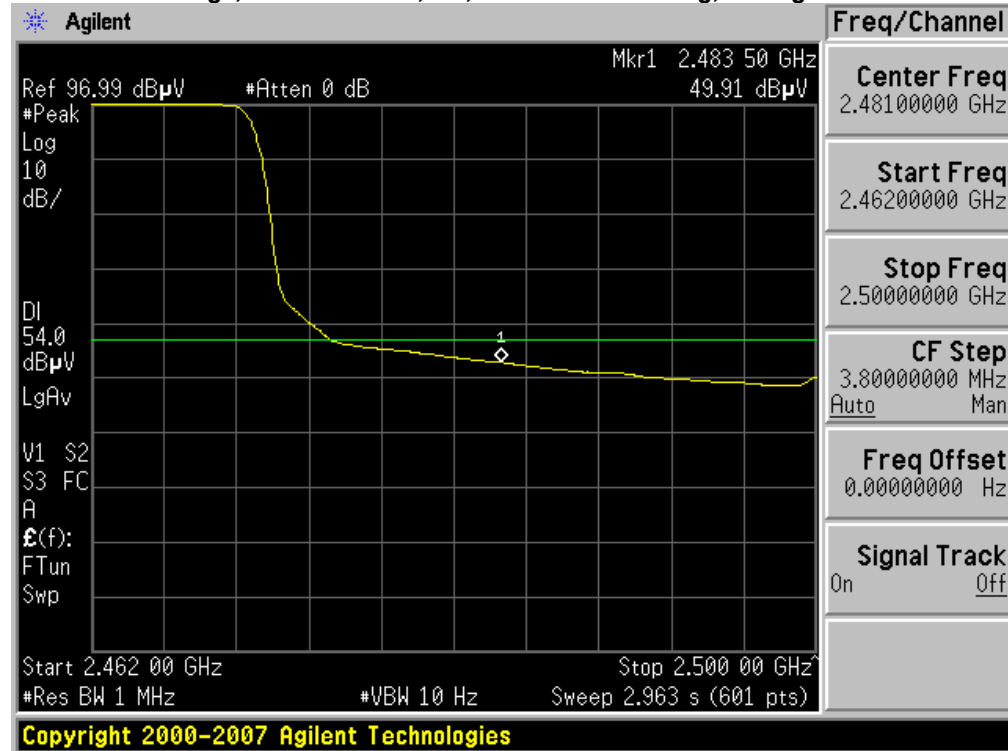


Radiated Bandedge, 2442/2462 MHz, m8, HT40 Beam Forming, Average

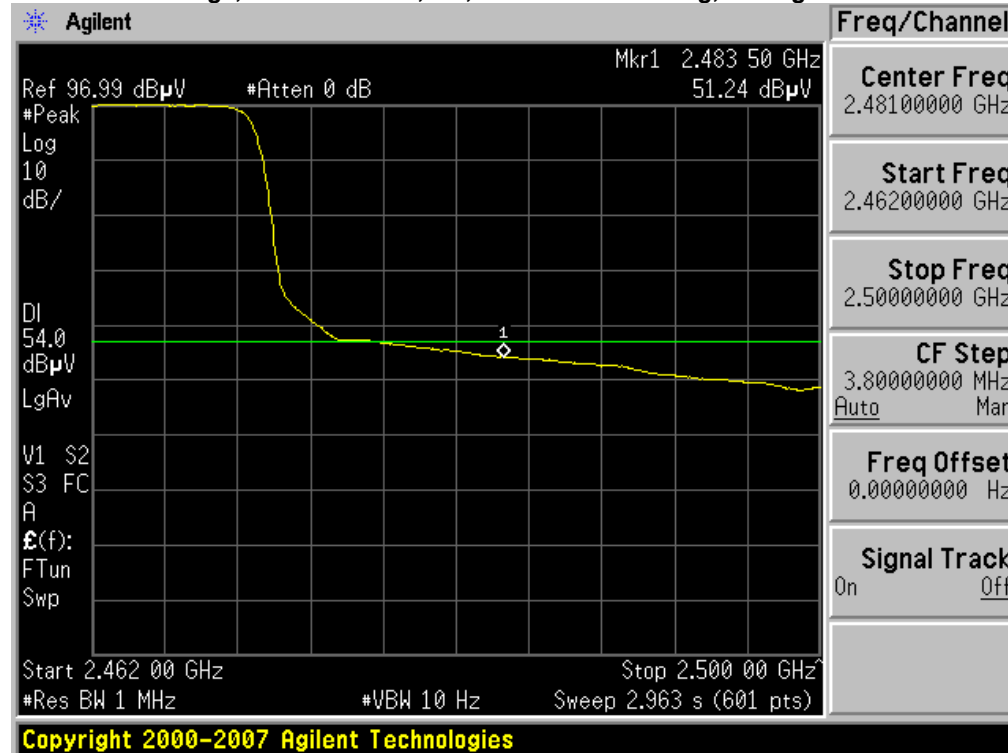




Radiated Bandedge, 2442/2462 MHz, m16, HT40 Beam Forming, Average

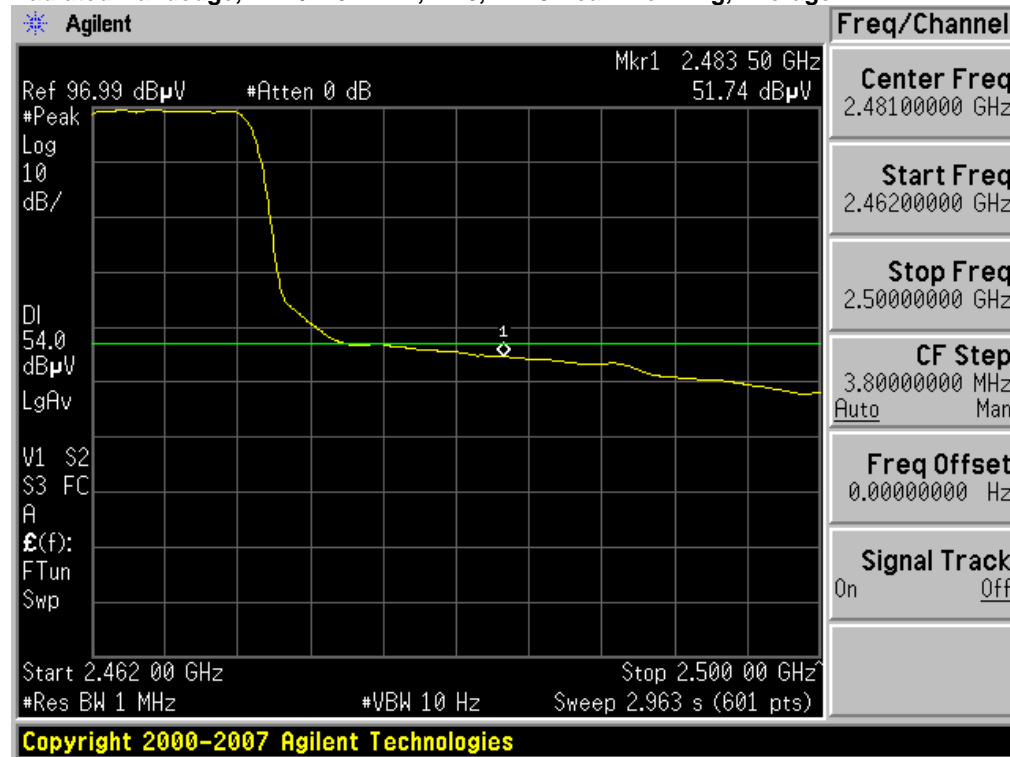




Radiated Bandedge, 2412 MHz, 11 Mbps, Legacy CCK, Peak

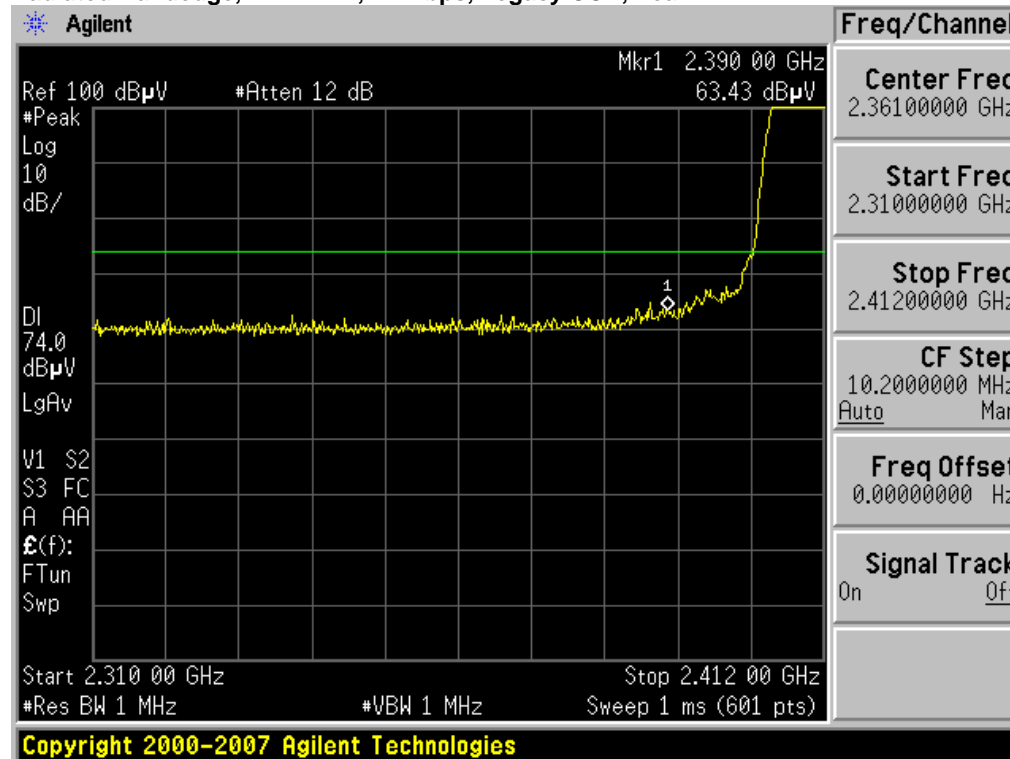


Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Peak

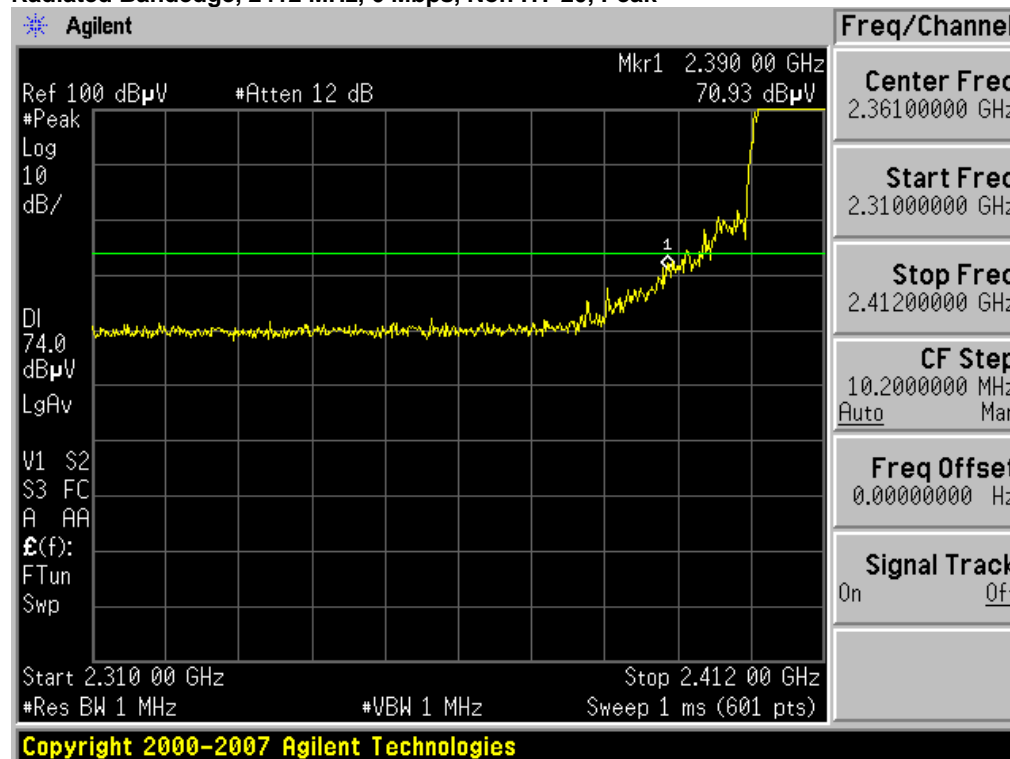




Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20 Beam Forming, Peak

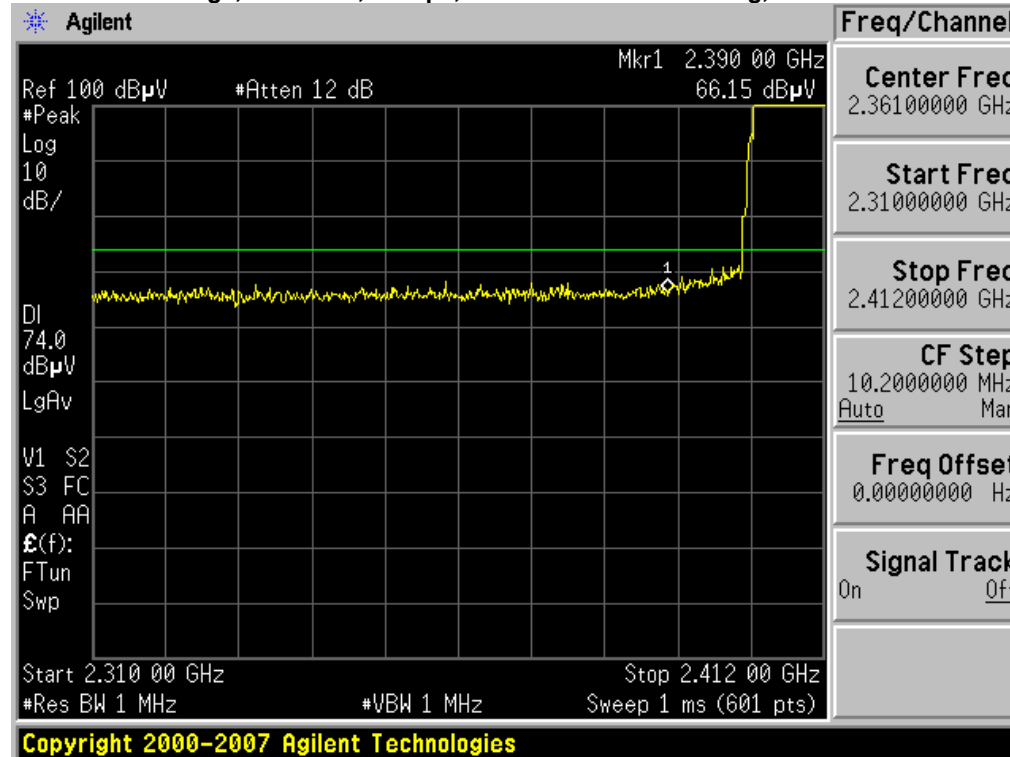


Radiated Bandedge, 2412 MHz, m0, HT20 with and without STBC, Peak

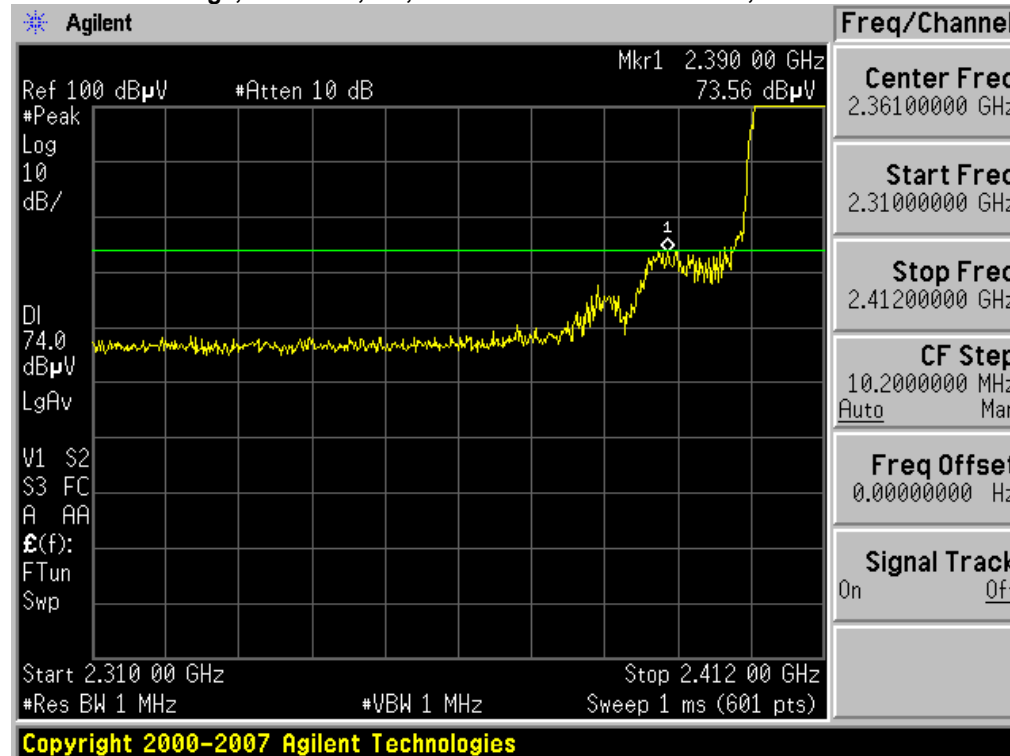




Radiated Bandedge, 2412 MHz, m0, HT20 Beam Forming, Peak

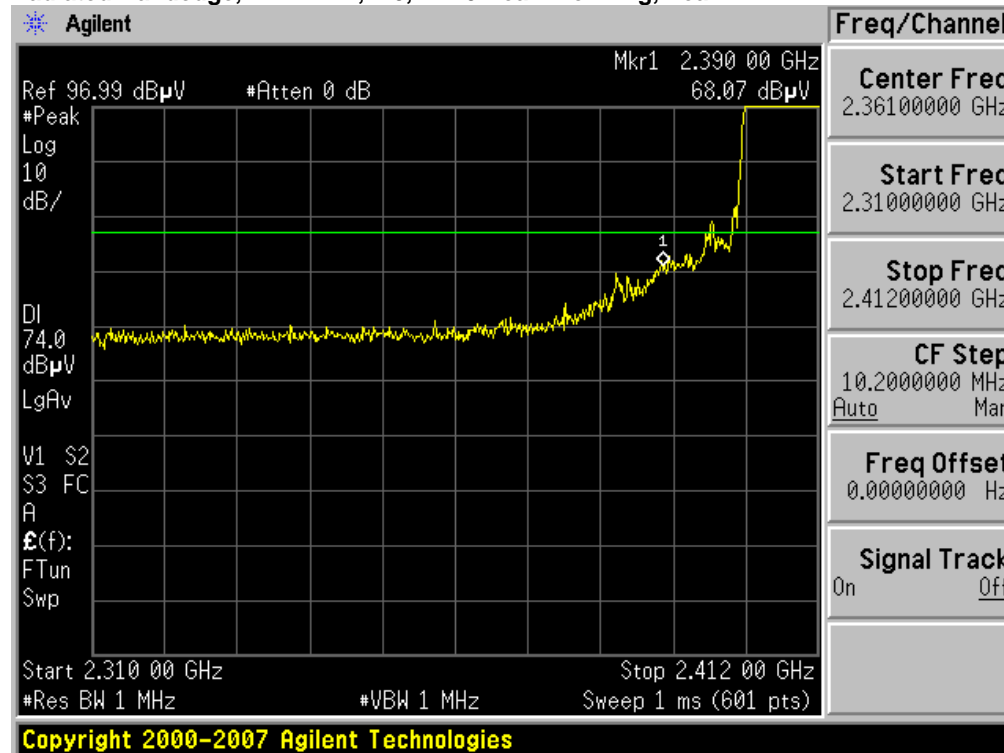


Radiated Bandedge, 2412 MHz, m8, HT20 Beam Forming, Peak

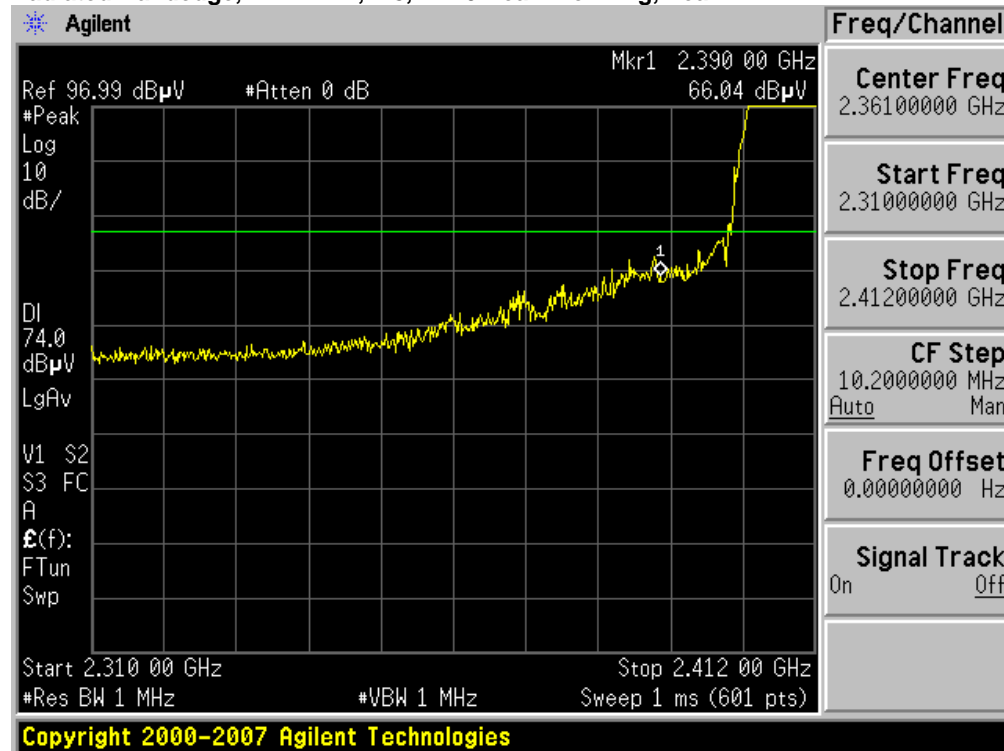




Radiated Bandedge, 2412 MHz, m16, HT20 Beam Forming, Peak

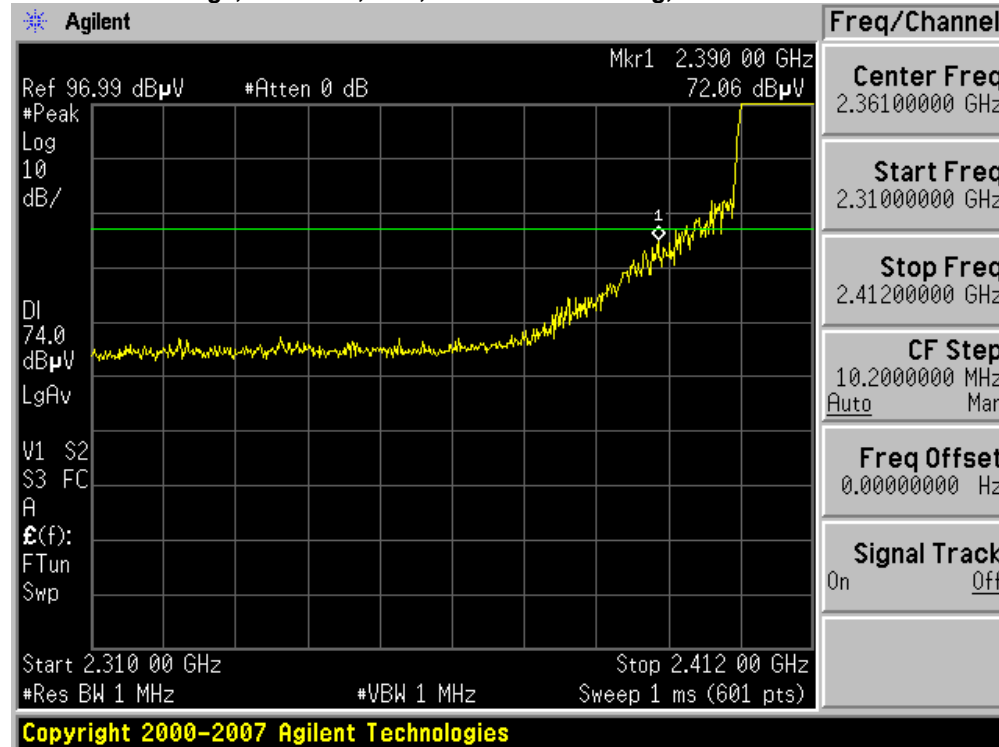


Radiated Bandedge, 2462 MHz, 11 Mbps, Legacy CCK, Peak

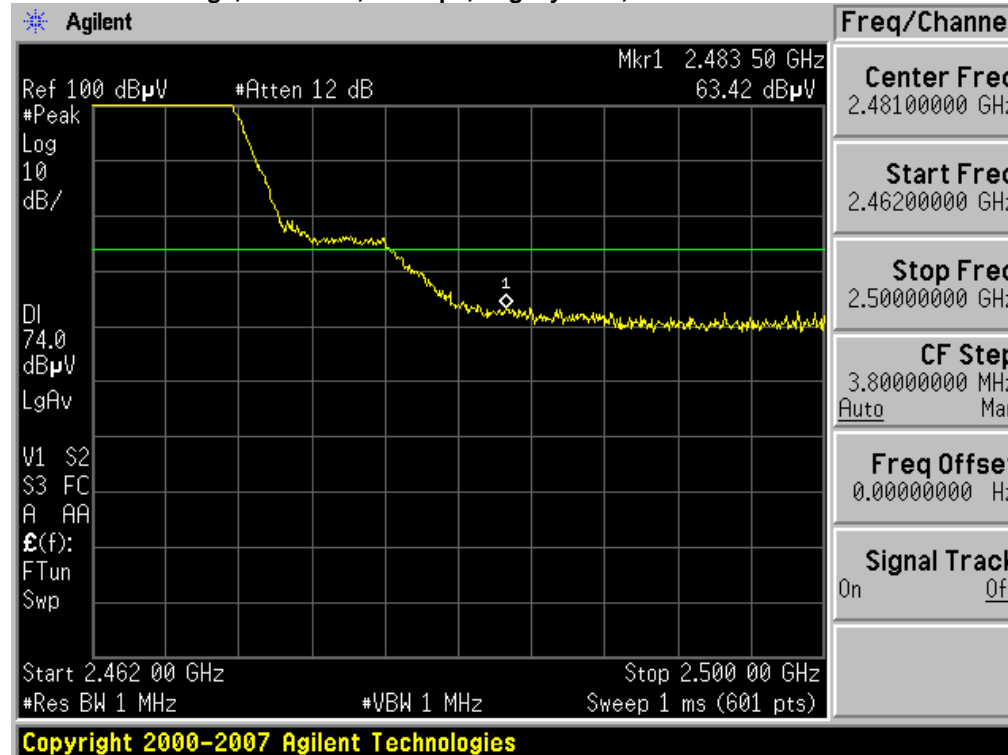




Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20, Peak

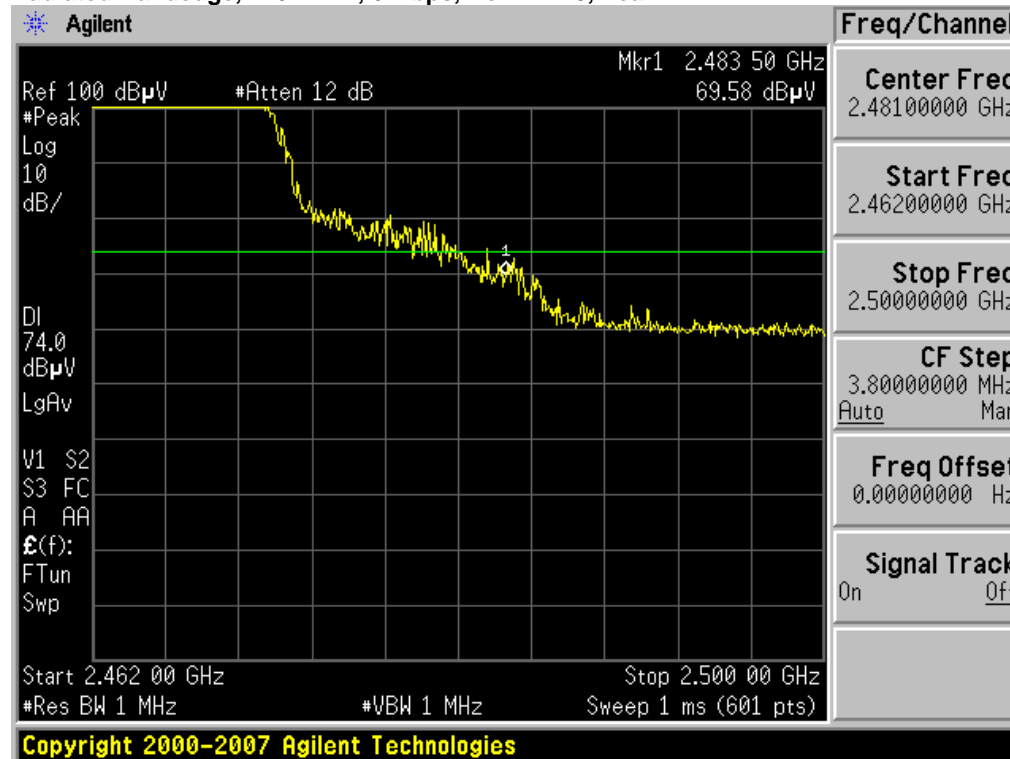


Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 Beam Forming, Peak

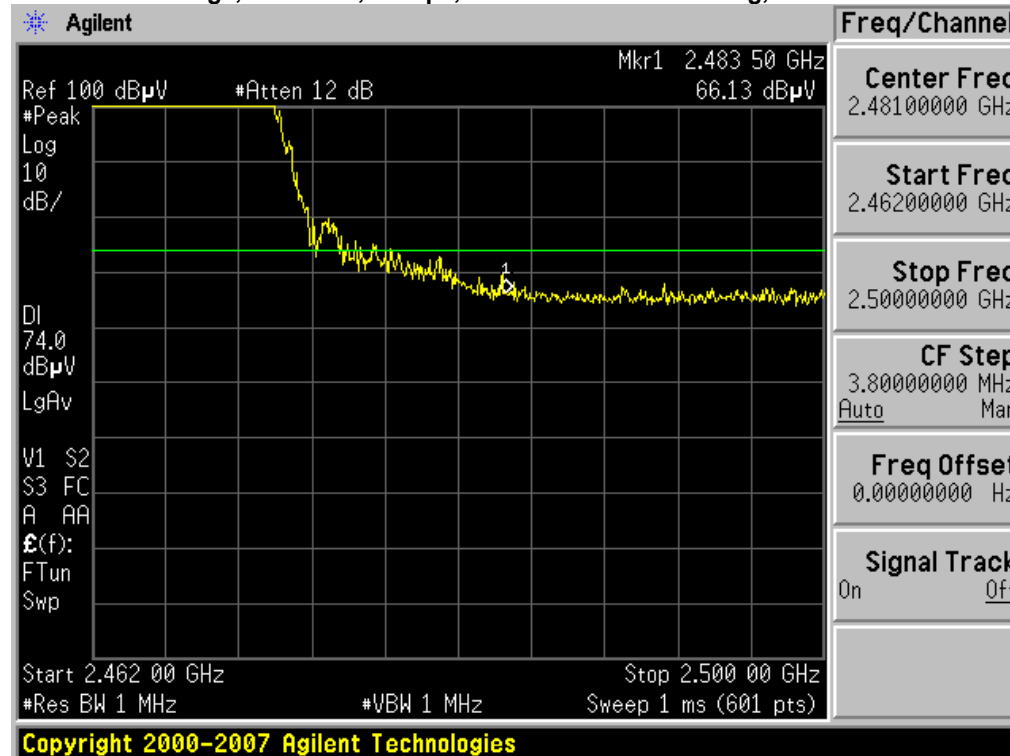




Radiated Bandedge, 2462 MHz, m0, HT20 with and without STBC, Peak

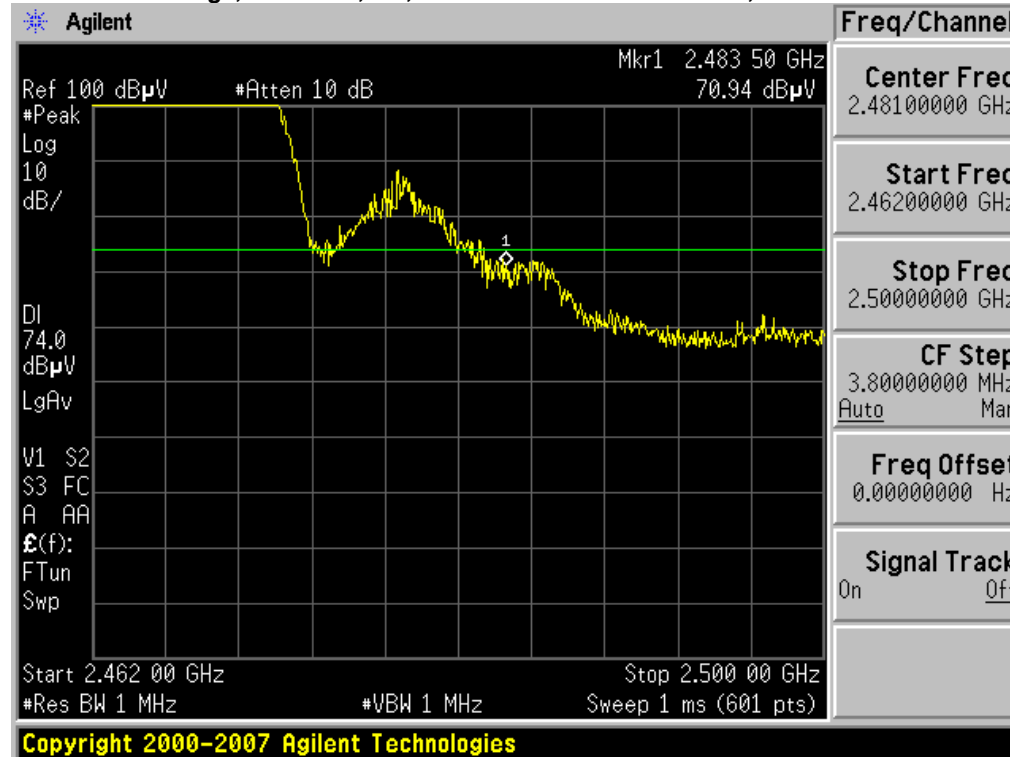


Radiated Bandedge, 2462 MHz, m0, HT20 Beam Forming, Peak

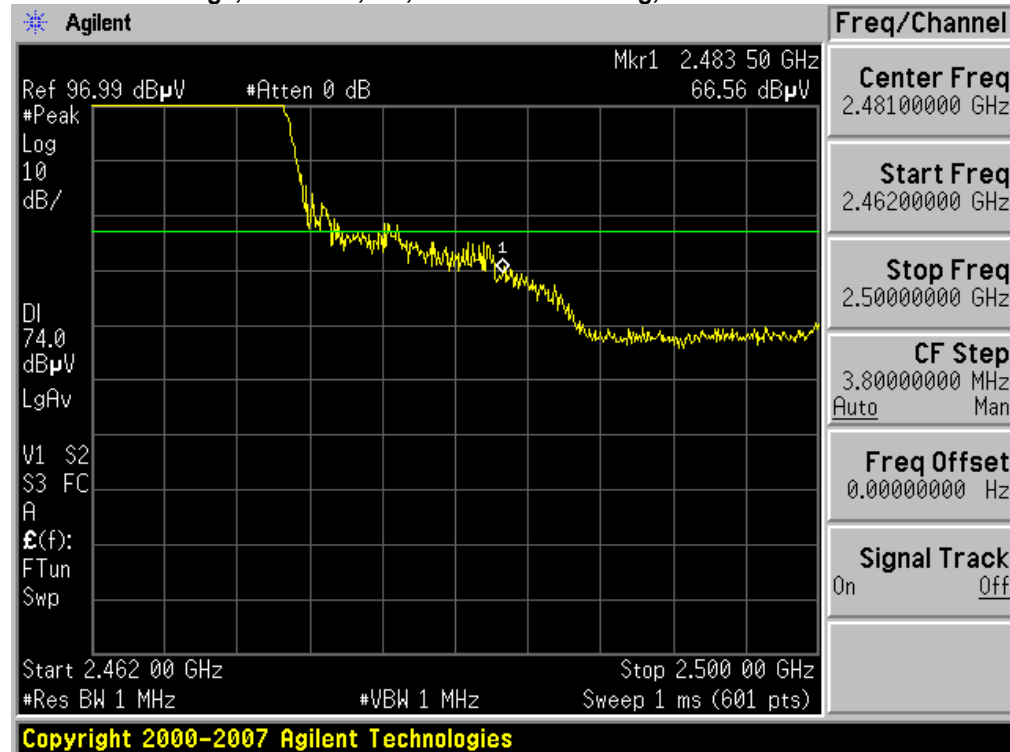




Radiated Bandedge, 2462 MHz, m8, HT20 Beam Forming, Peak

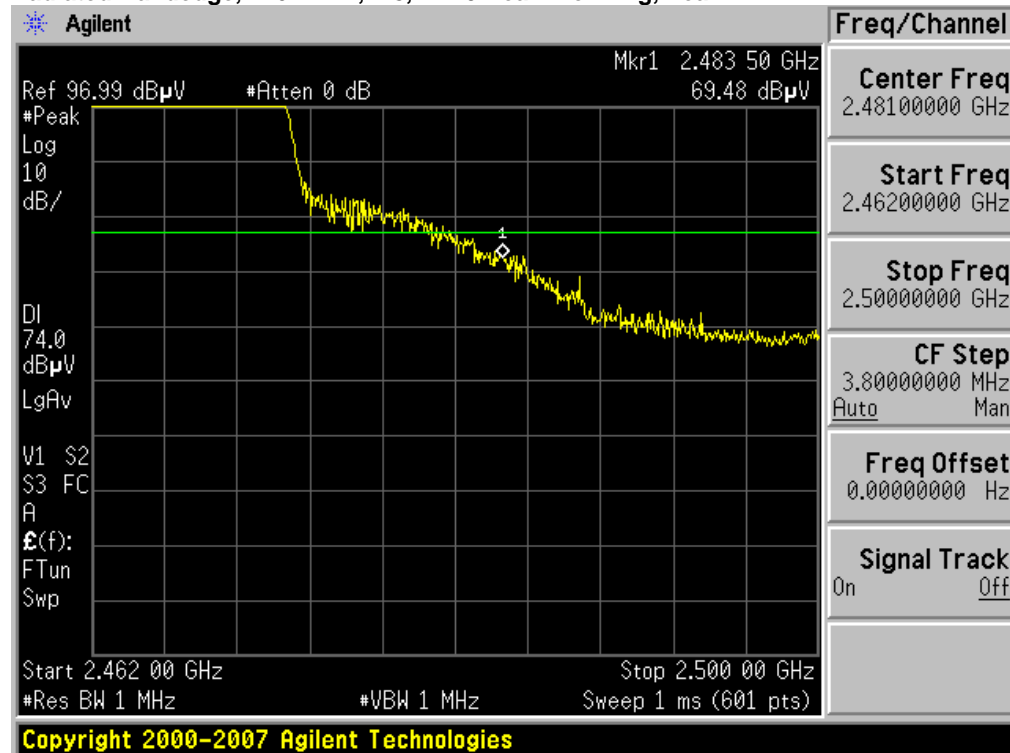


Radiated Bandedge, 2462 MHz, m16, HT20 Beam Forming, Peak

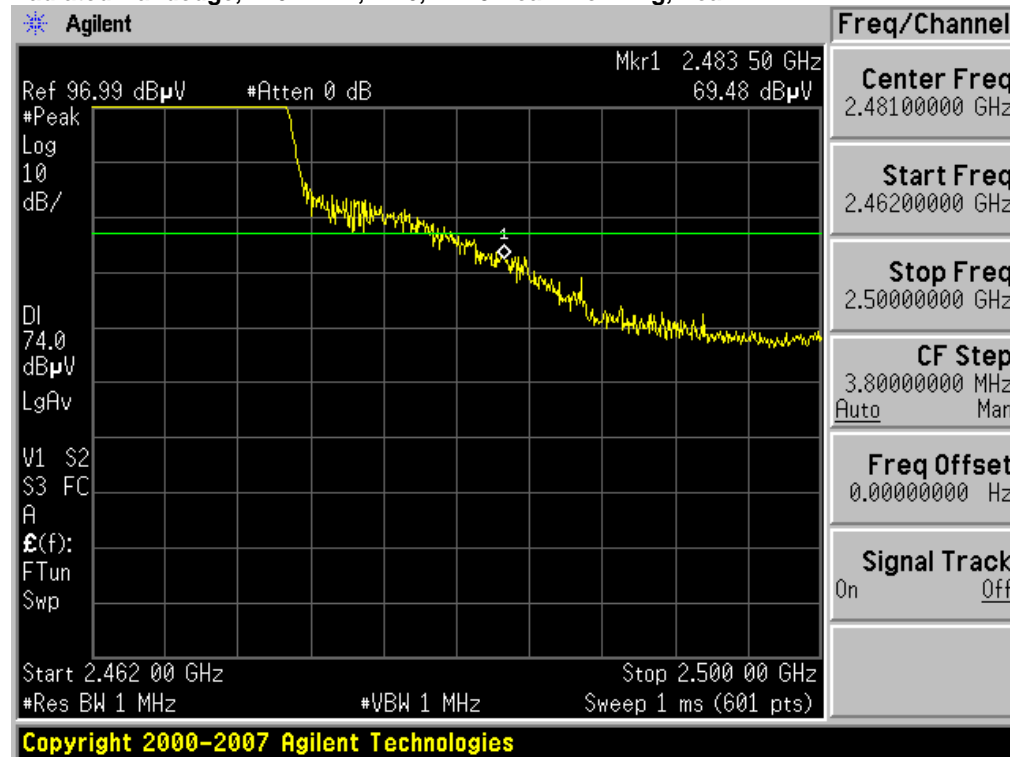




Radiated Bandedge, 2412/2432 MHz, 6 Mbps, Non-HT40, Peak

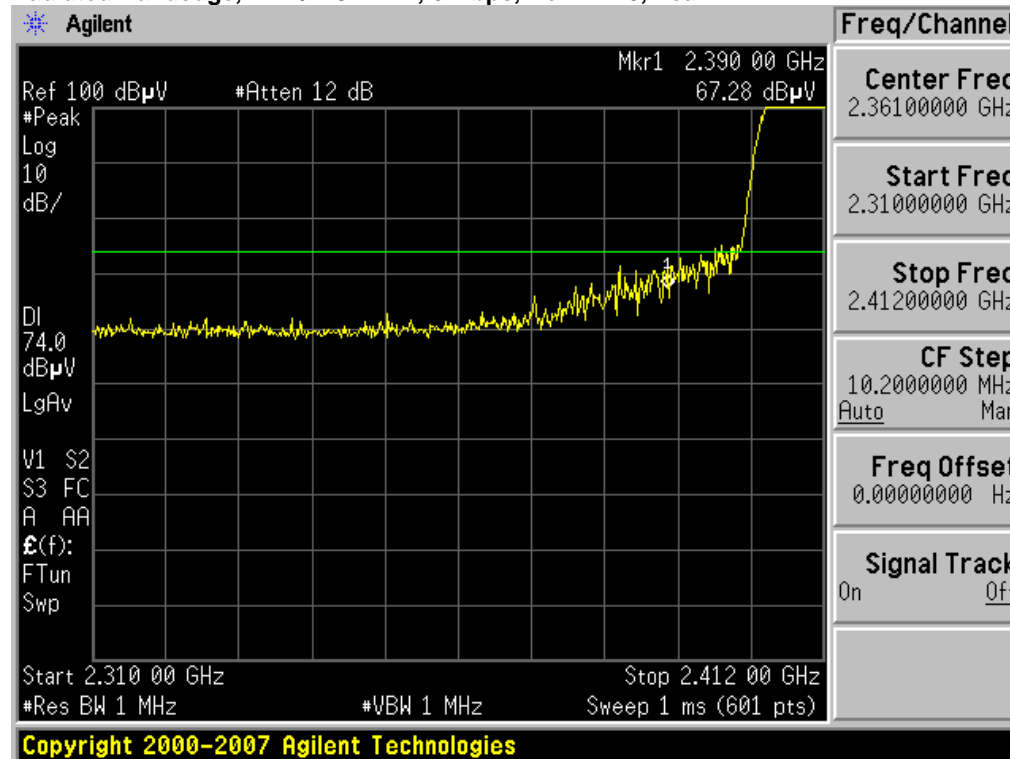


Radiated Bandedge, 2412/2432 MHz, m0, HT40 with and without STBC, Peak

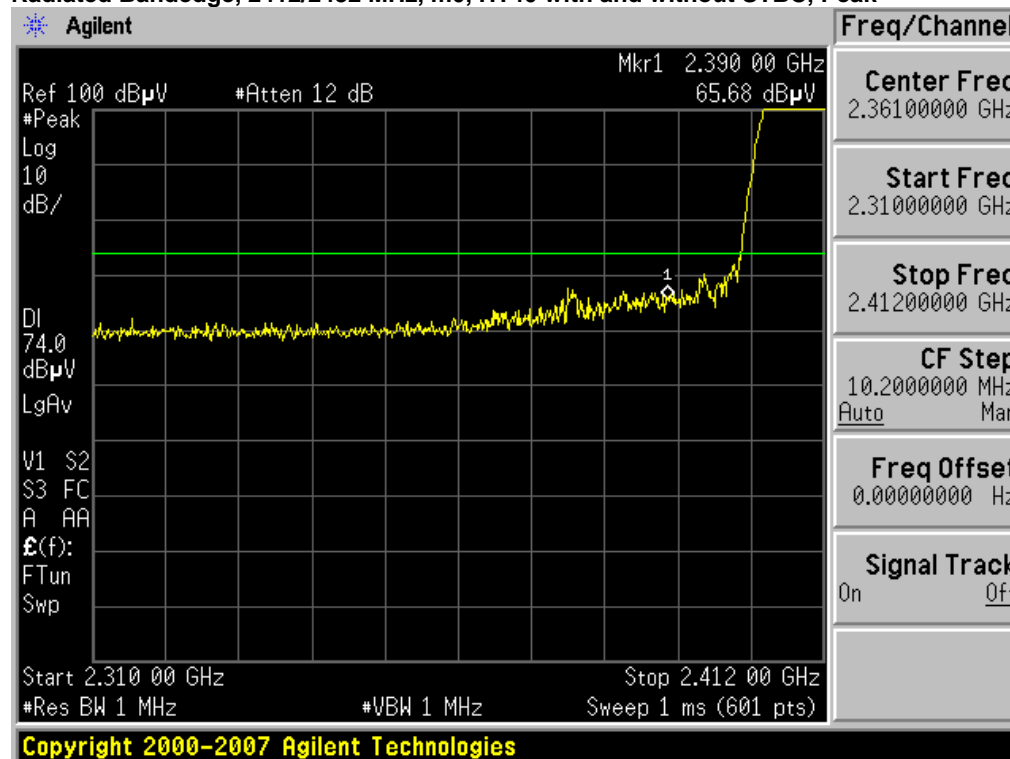




Radiated Bandedge, 2412/2432 MHz, m0, HT40 Beam Forming, Peak

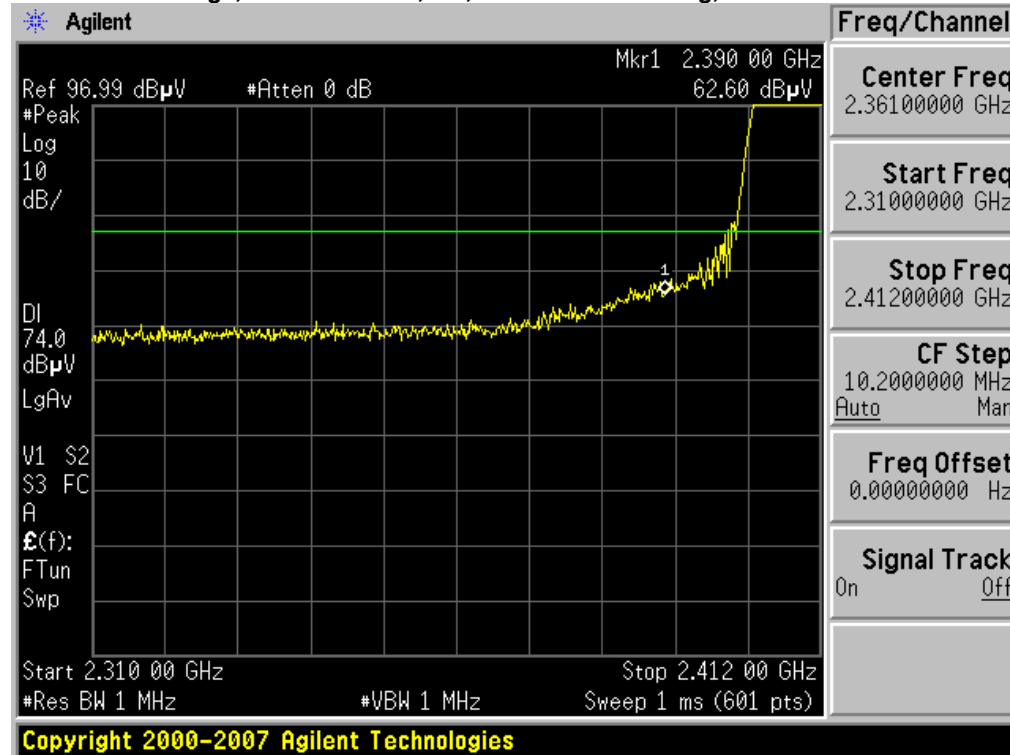


Radiated Bandedge, 2412/2432 MHz, m8, HT40 Beam Forming, Peak

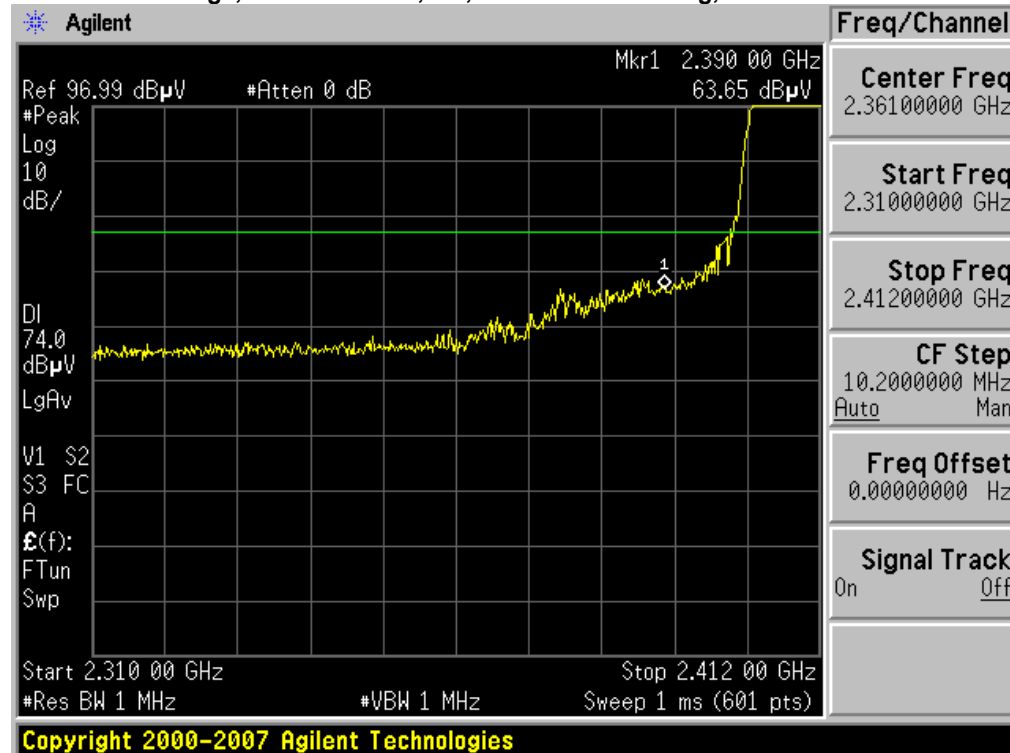




Radiated Bandedge, 2412/2432 MHz, m16, HT40 Beam Forming, Peak

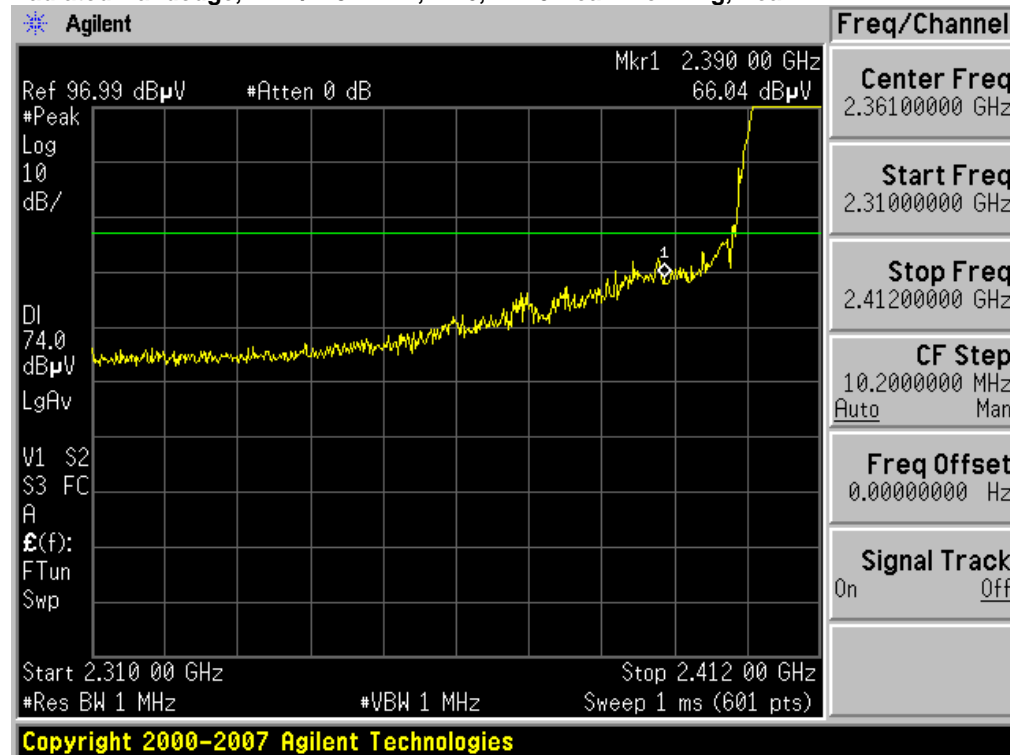


Radiated Bandedge, 2442/2462 MHz, 6 Mbps, Non-HT40, Peak

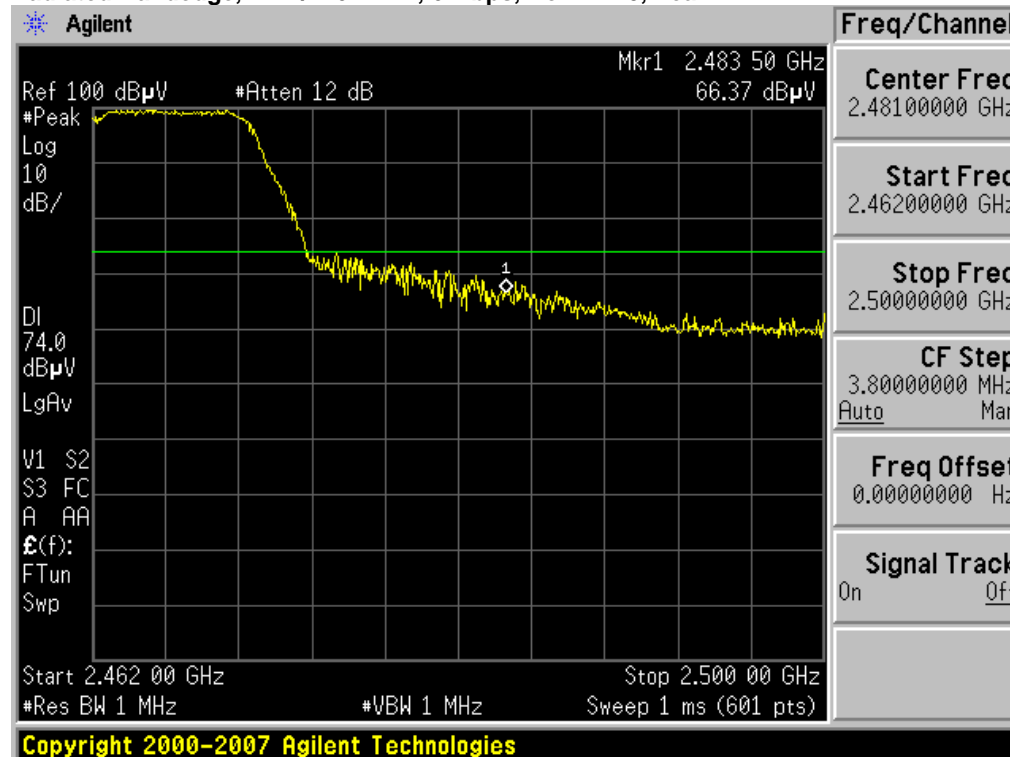




Radiated Bandedge, 2442/2462 MHz, m0, HT40 with and without STBC, Peak

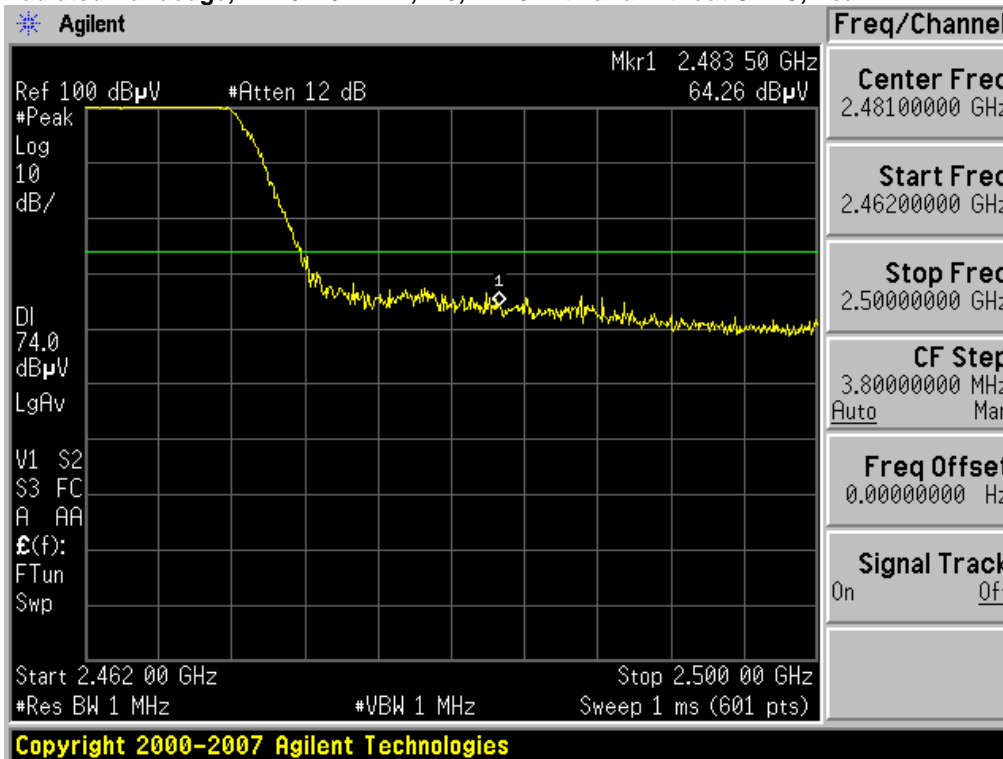


Radiated Bandedge, 2442/2462 MHz, m0, HT40 Beam Forming, Peak

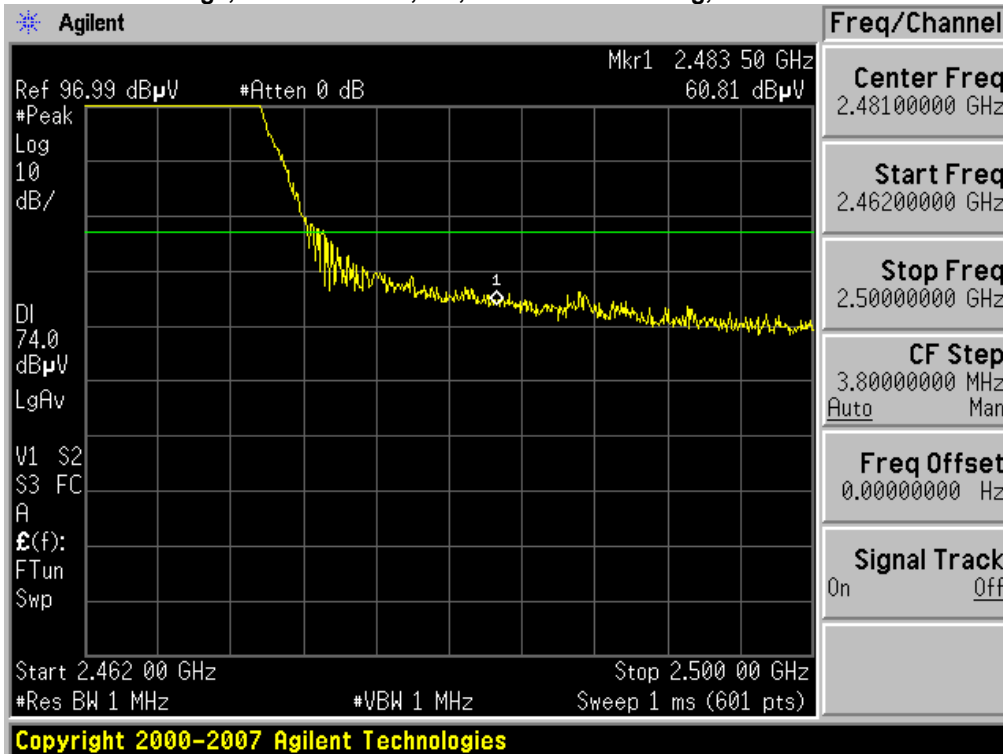




Radiated Bandedge, 2442/2462 MHz, m8, HT40 Beam Forming, Peak

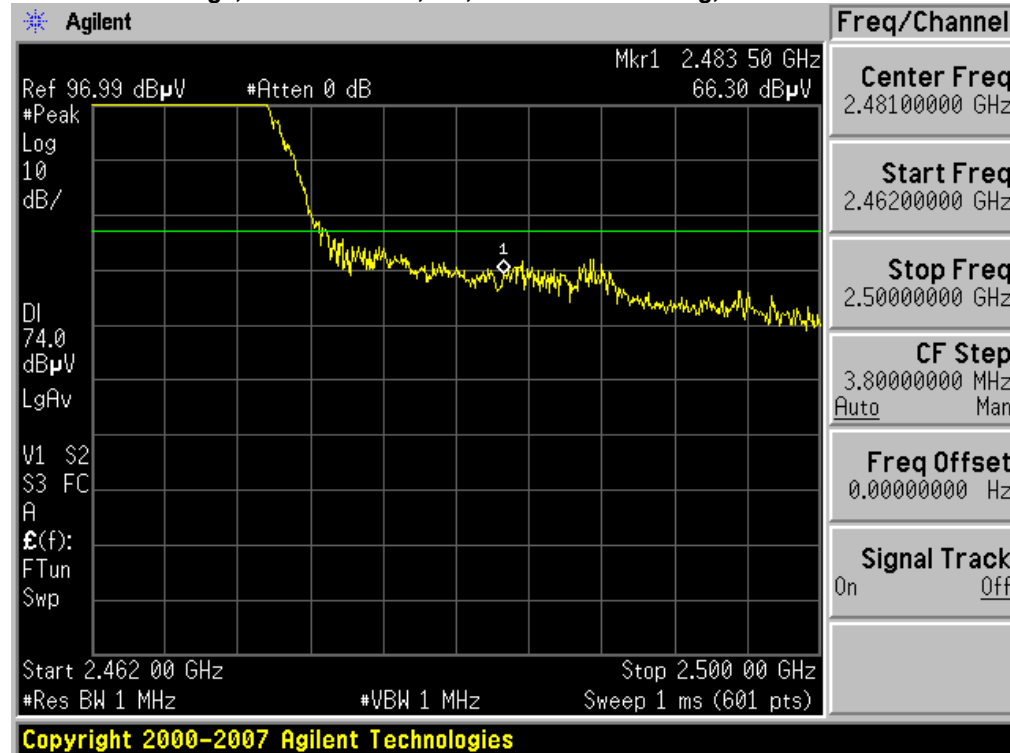

Radiated Bandedge, 2442/2462 MHz, m16, HT40 Beam Forming, Peak

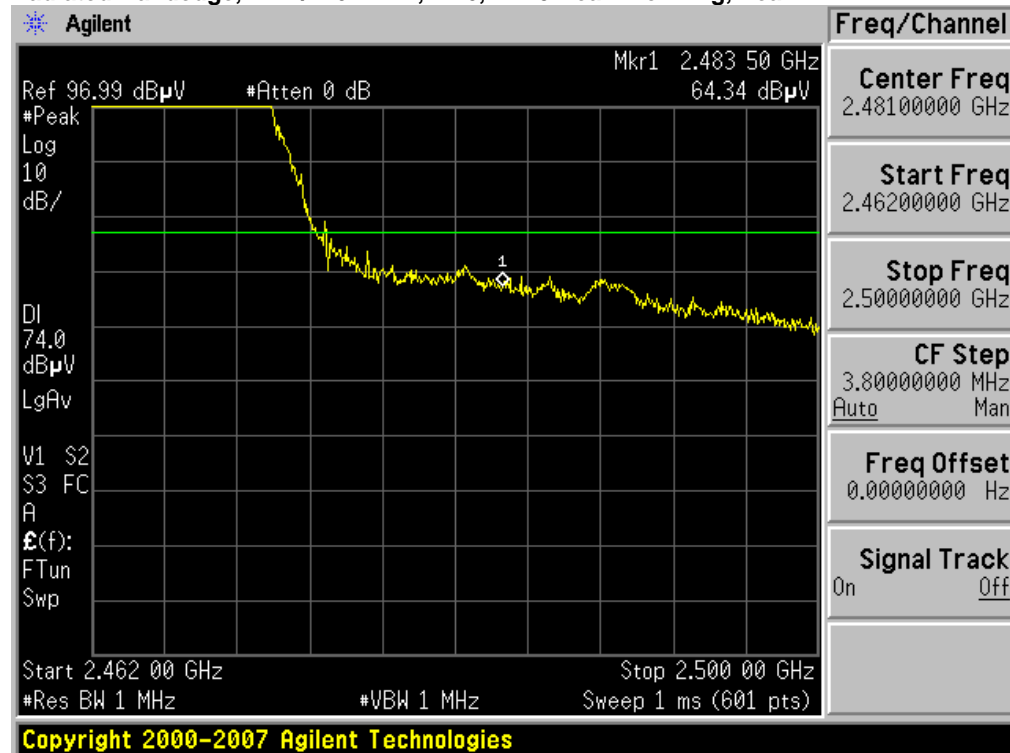



Radiated Spurious Emissions

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

| | |
|-----------------------|-----------------------------------|
| Span: | 1GHz – 18 GHz |
| Reference Level: | 80 dBuV |
| Attenuation: | 10 dB |
| Sweep Time: | Coupled |
| Resolution Bandwidth: | 1MHz |
| Video Bandwidth: | 1 MHz for peak, 10 Hz for average |
| Detector: | Peak |

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.


This report represents the worst case data for all supported operating modes and antennas.
There are no measurable emissions above 18 GHz.




| Frequency (MHz) | Mode | Data Rate (Mbps) | Spurious Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|--------------------------------------|------------------|----------------------------------|----------------|-------------|
| 2412 | Legacy CCK, 1 to 11 Mbps | 11 | 33.3 | 54.0 | 20.7 |
| | Non HT-20, 6 to 54 Mbps | 6 | 33.3 | 54.0 | 20.7 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 33.3 | 54.0 | 20.7 |
| | HT-20, M0 to M23 | m0 | 33.3 | 54.0 | 20.7 |
| | HT-20 STBC, M0 to M7 | m0 | 33.3 | 54.0 | 20.7 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 33.3 | 54.0 | 20.7 |
| 2437 | Legacy CCK, 1 to 11 Mbps | 11 | 32.7 | 54.0 | 21.3 |
| | Non HT-20, 6 to 54 Mbps | 6 | 32.7 | 54.0 | 21.3 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 32.7 | 54.0 | 21.3 |
| | HT-20, M0 to M23 | m0 | 32.7 | 54.0 | 21.3 |
| | HT-20 STBC, M0 to M7 | m0 | 32.7 | 54.0 | 21.3 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 32.7 | 54.0 | 21.3 |
| 2462 | Legacy CCK, 1 to 11 Mbps | 11 | 35.0 | 54.0 | 19.0 |
| | Non HT-20, 6 to 54 Mbps | 6 | 35.0 | 54.0 | 19.0 |
| | Non HT-20 Beam Forming, 6 to 54 Mbps | 6 | 35.0 | 54.0 | 19.0 |
| | HT-20, M0 to M23 | m0 | 35.0 | 54.0 | 19.0 |
| | HT-20 STBC, M0 to M7 | m0 | 35.0 | 54.0 | 19.0 |
| | HT-20 Beam Forming, M0 to M23 | m0 | 35.0 | 54.0 | 19.0 |
| 2412/2432 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 33.3 | 54.0 | 20.7 |
| | HT-40, M0 to M23 | m0 | 33.3 | 54.0 | 20.7 |
| | HT-40 STBC, M0 to M7 | m0 | 33.3 | 54.0 | 20.7 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 33.3 | 54.0 | 20.7 |
| 2427/2447 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 32.7 | 54.0 | 21.3 |
| | HT-40, M0 to M23 | m0 | 32.7 | 54.0 | 21.3 |
| | HT-40 STBC, M0 to M7 | m0 | 32.7 | 54.0 | 21.3 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 32.7 | 54.0 | 21.3 |
| 2442/2462 | Non HT-40 Duplicate, 6-54 Mbps | 6 | 35.0 | 54.0 | 19.0 |
| | HT-40, M0 to M23 | m0 | 35.0 | 54.0 | 19.0 |
| | HT-40 STBC, M0 to M7 | m0 | 35.0 | 54.0 | 19.0 |
| | HT-40 Beam Forming, M0 to M23 | m0 | 35.0 | 54.0 | 19.0 |



Radiated Spurs, 2412 MHz, All Rates, All Modes, Average

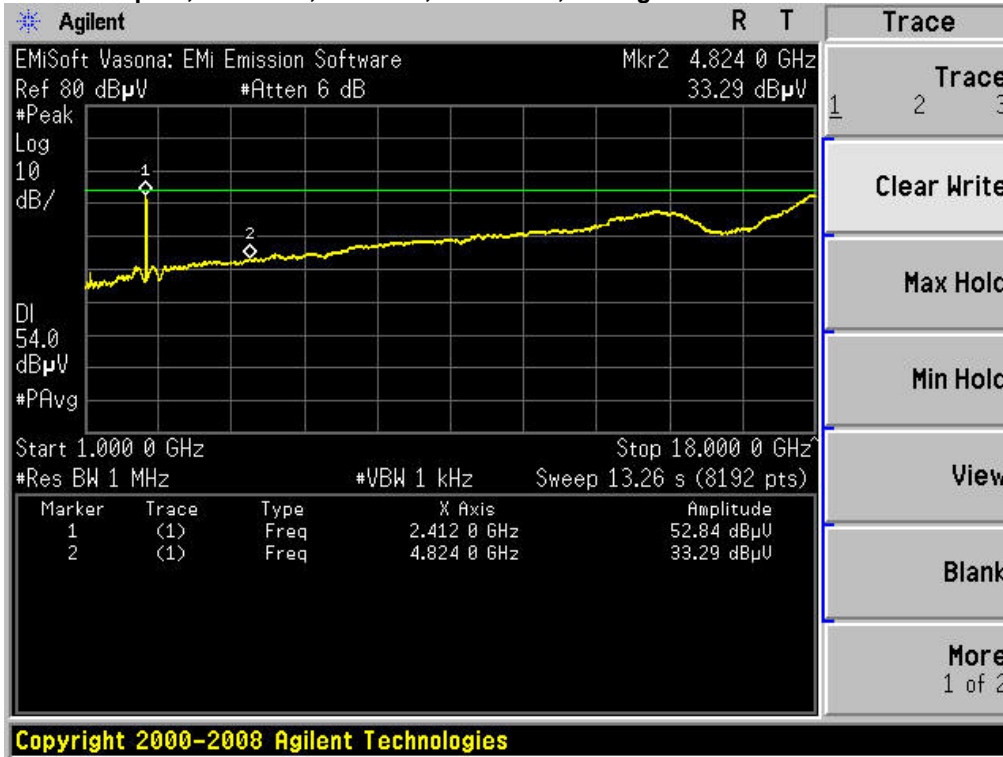


Radiated Spurs, 2437 MHz, All Rates, All Modes, Average

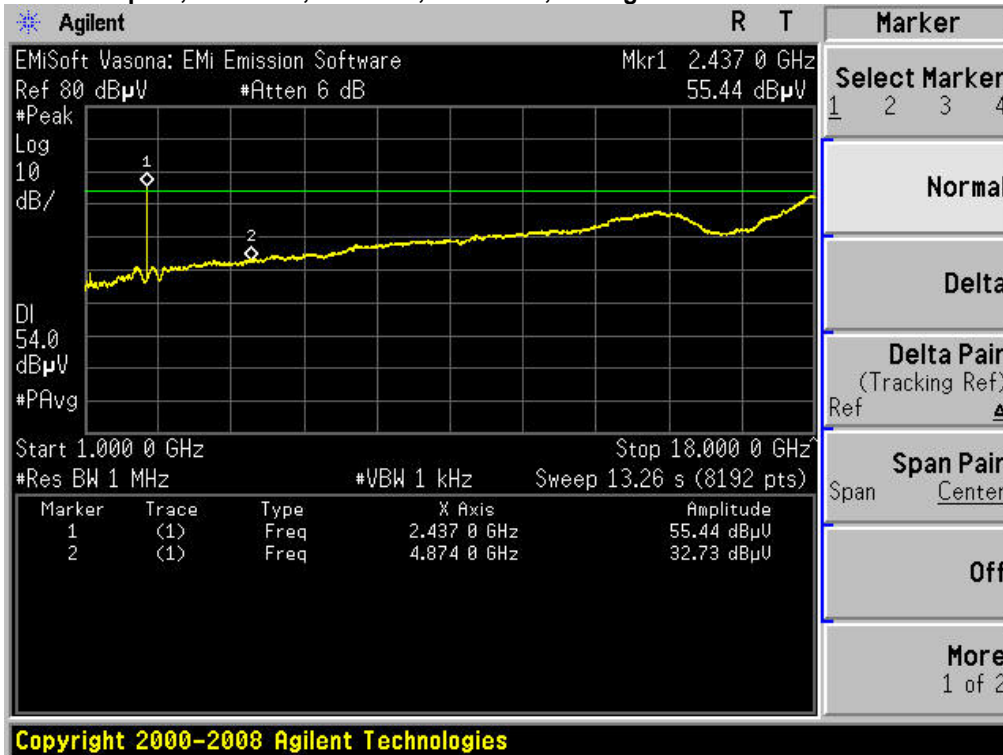




Radiated Spurs, 2462 MHz, All Rates, All Modes, Average

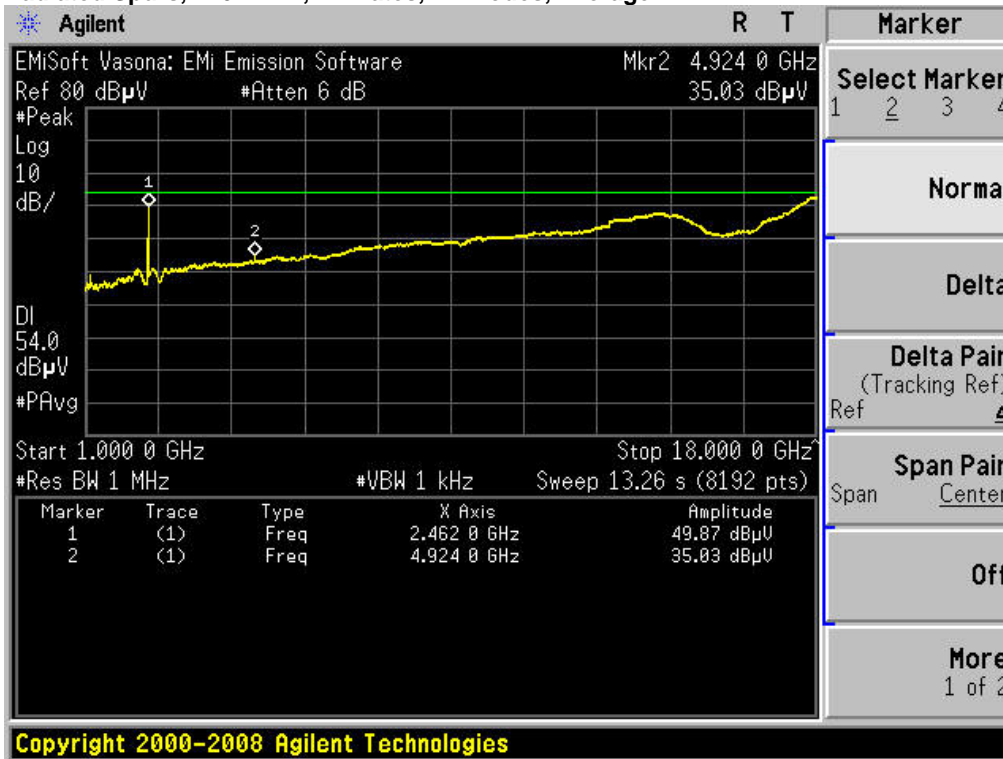


Radiated Spurs, 2412/2432 MHz, All Rates, All Modes, Average

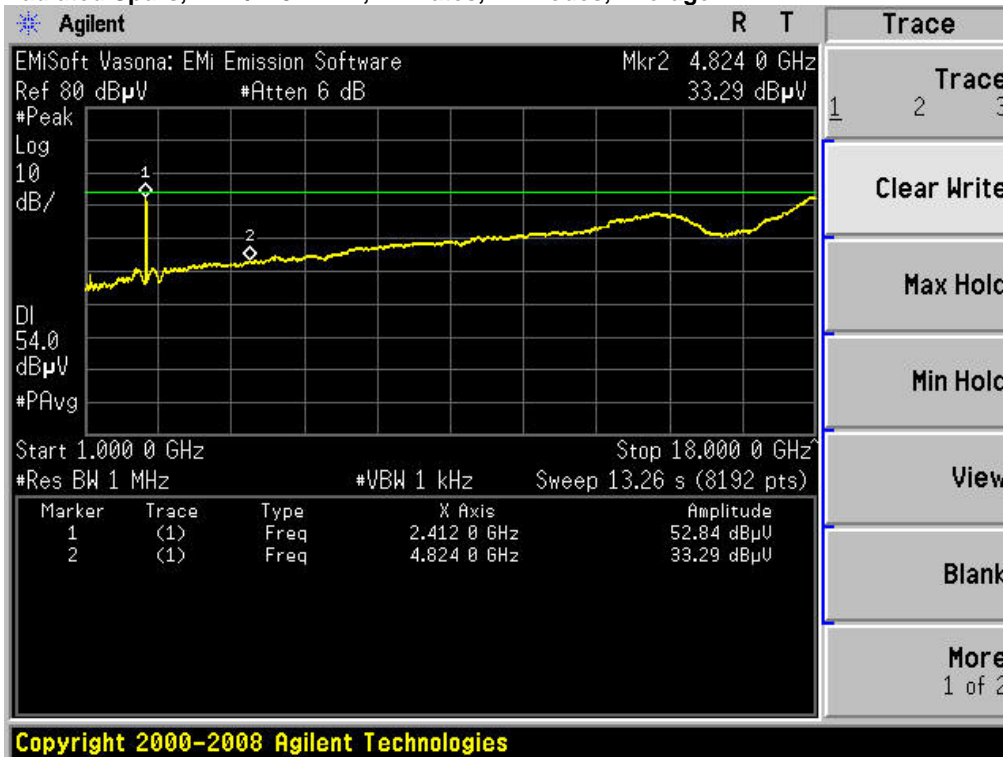




Radiated Spurs, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate, Average

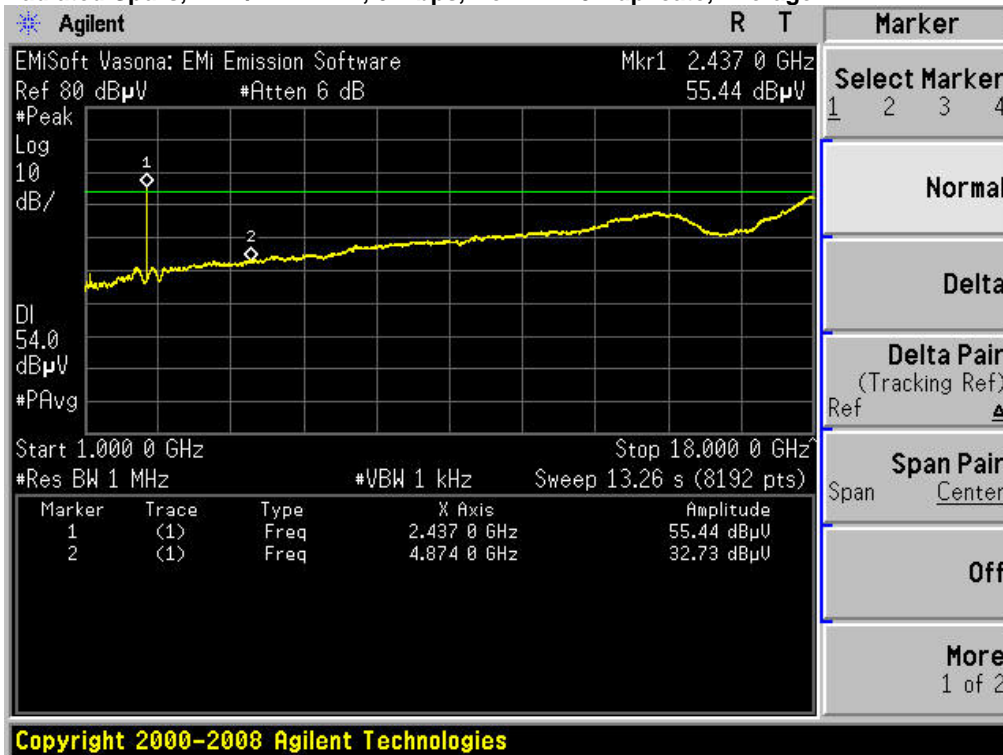


Radiated Spurs, 2442/2462 MHz, All Rates, All Modes, Average

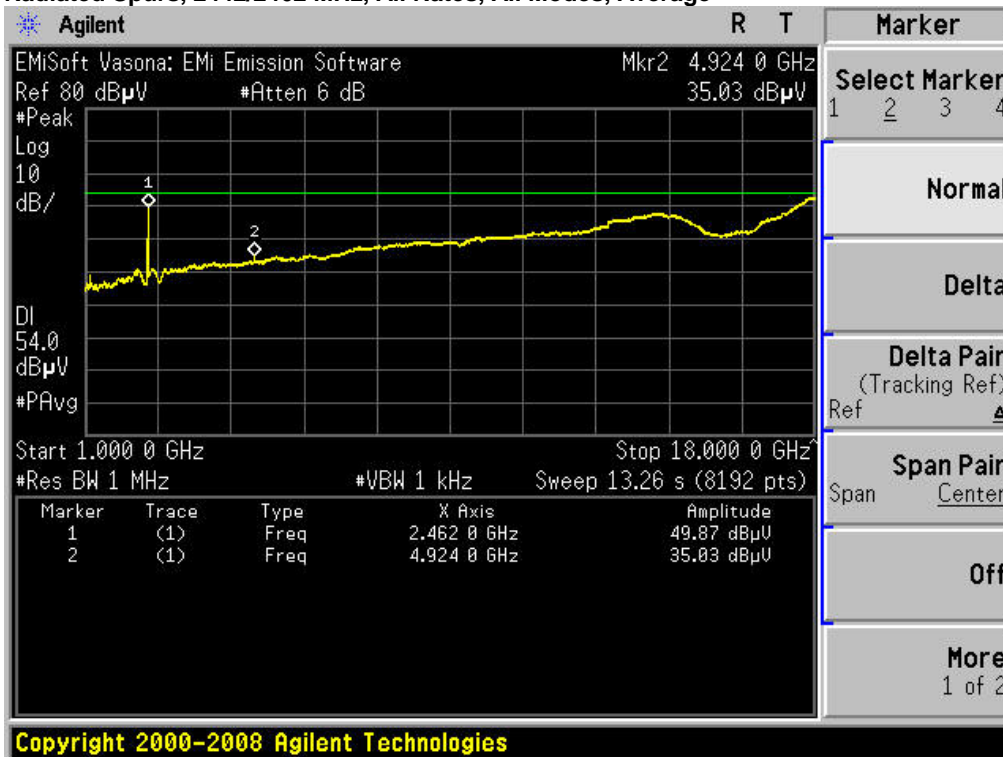




Radiated Spurs, 2412 MHz, All Rates, All Modes, Peak

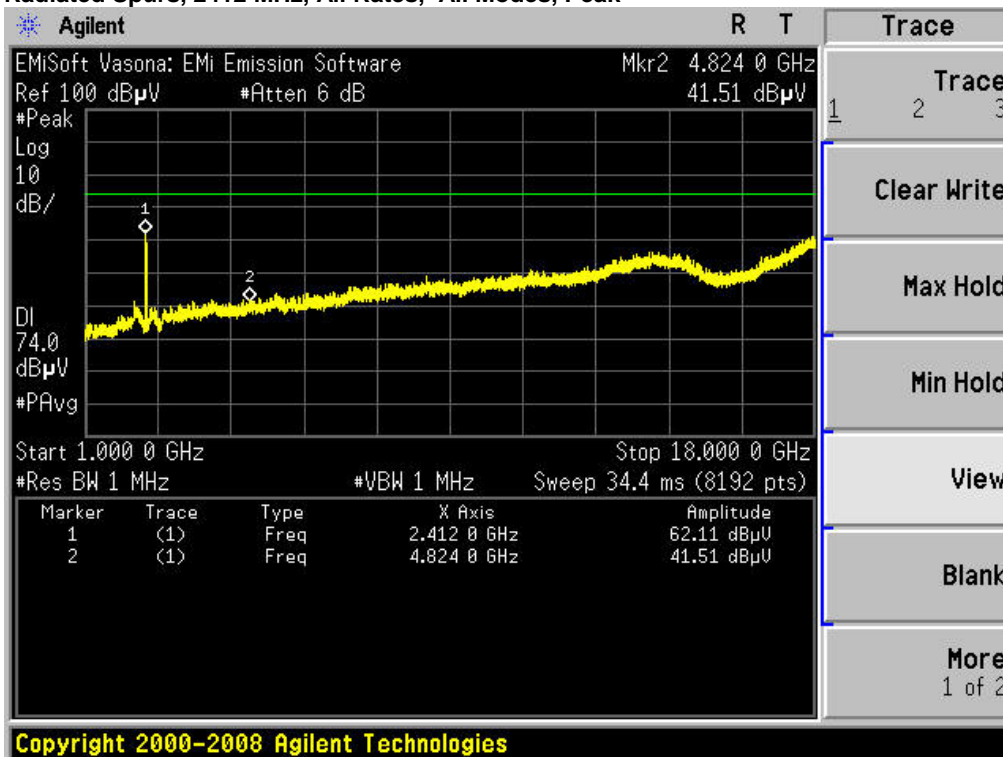


Radiated Spurs, 2437 MHz, All Rates, All Modes, Peak

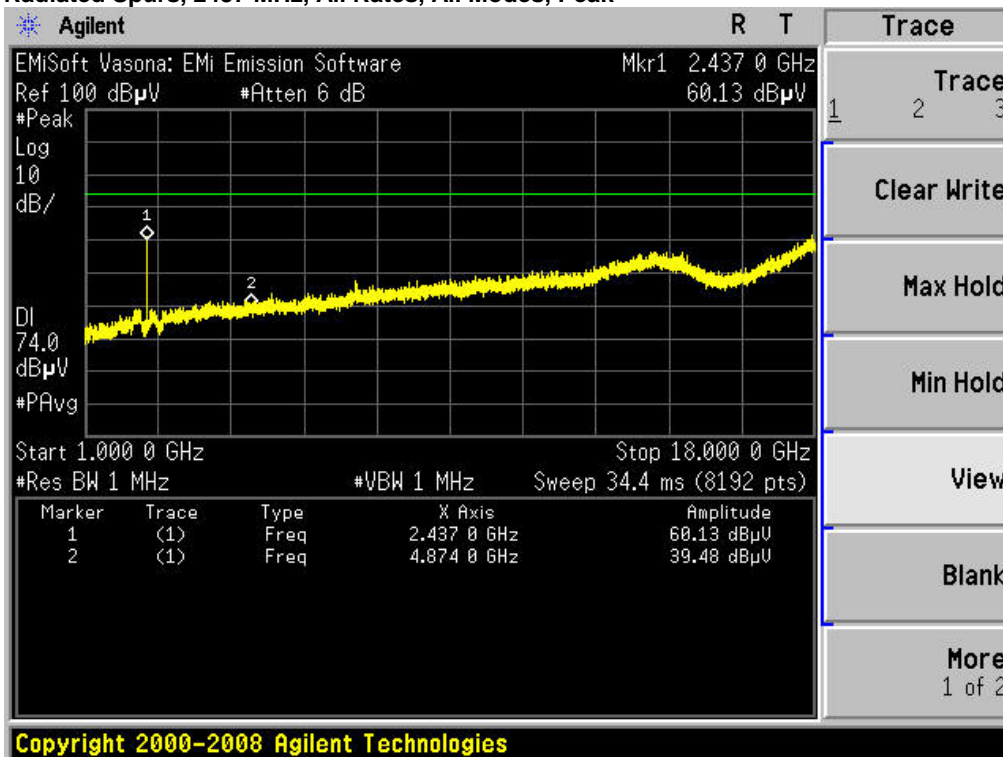




Radiated Spurs, 2462 MHz, All Rates, All Modes, Peak

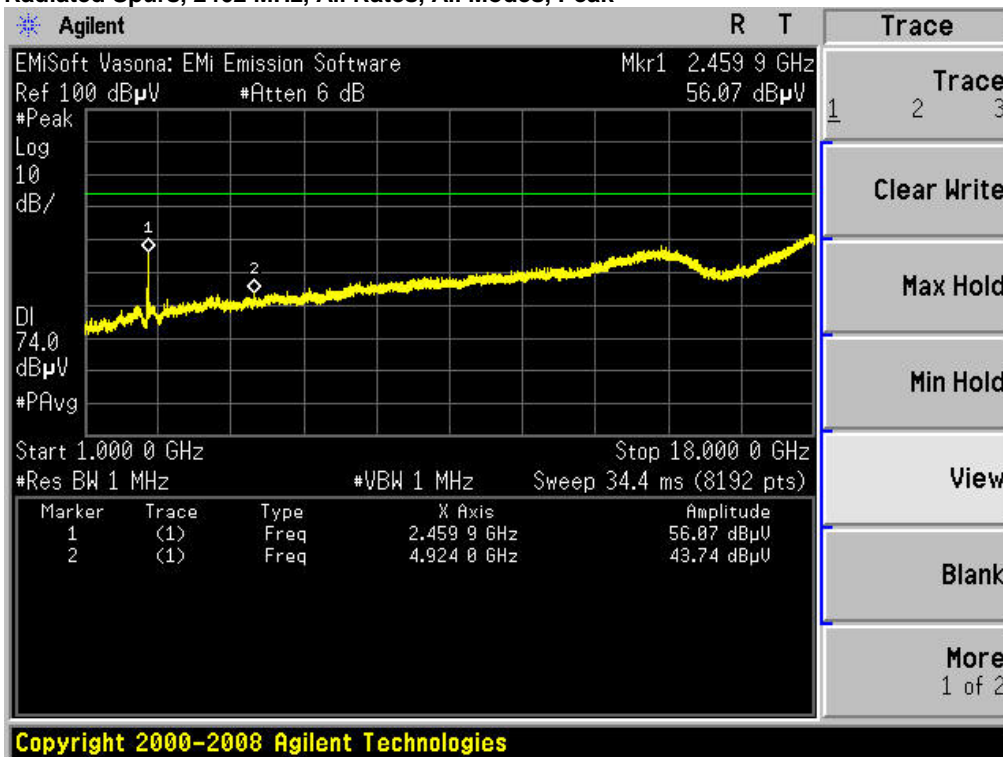


Radiated Spurs, 2412/2432 MHz, All Rates, All Modes, Peak

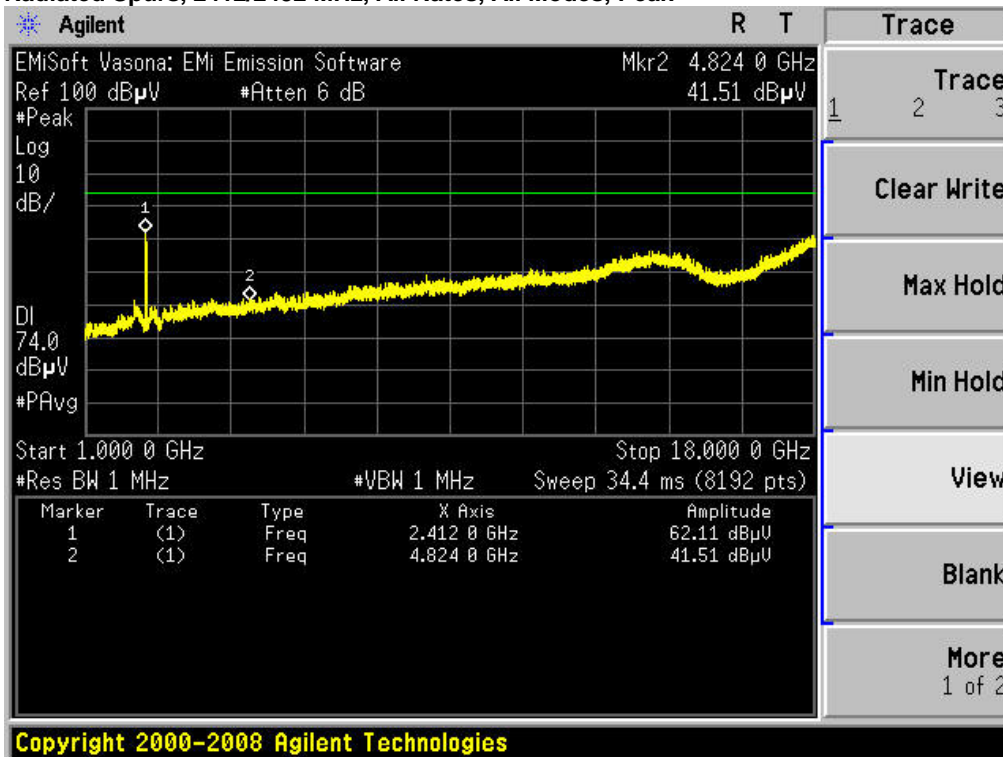




Radiated Spurs, 2427/2447 MHz, 6 Mbps, Non HT-40 Duplicate, Peak

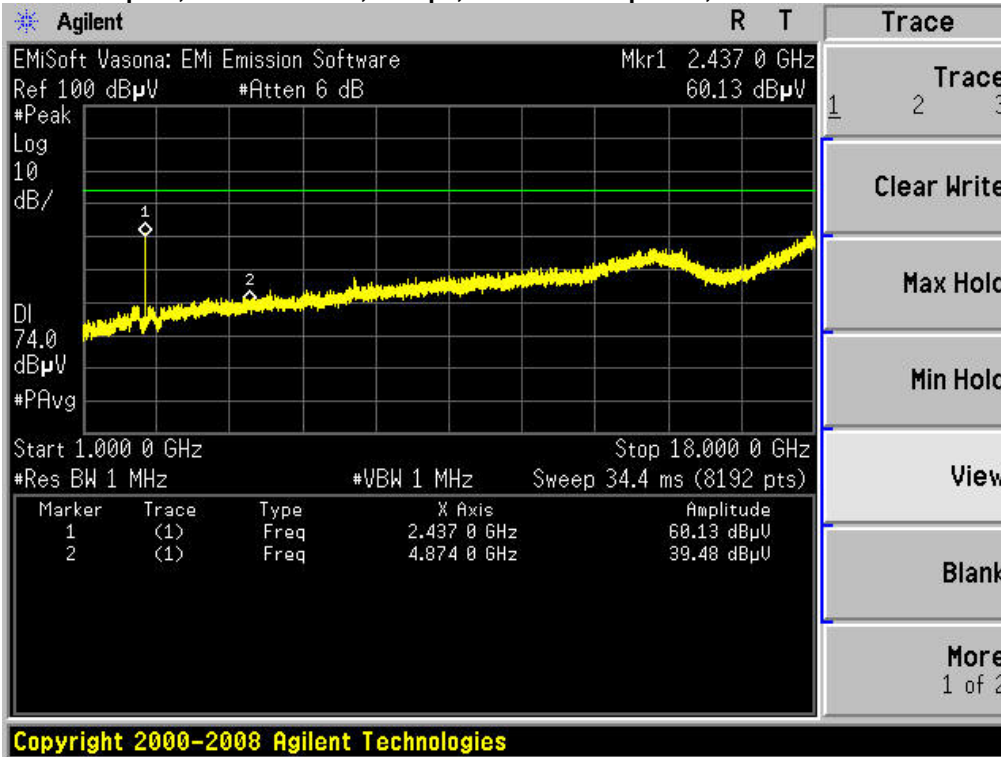


Radiated Spurs, 2442/2462 MHz, All Rates, All Modes, Peak

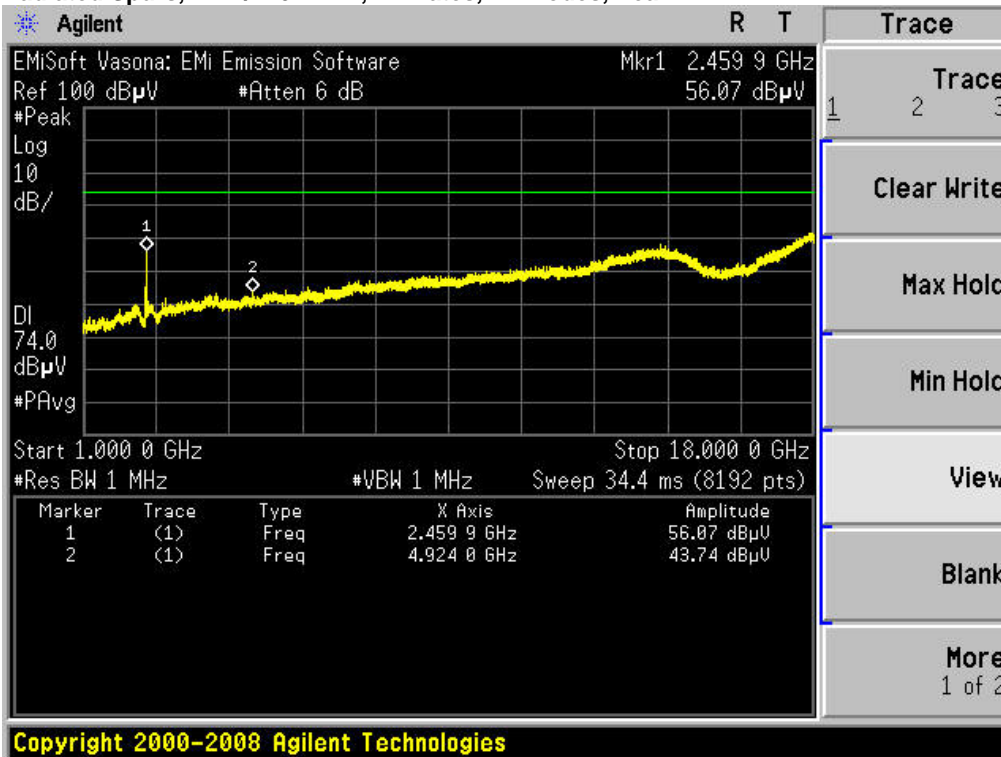




Radiated Receiver Spurs, All Rates, All Modes, Average

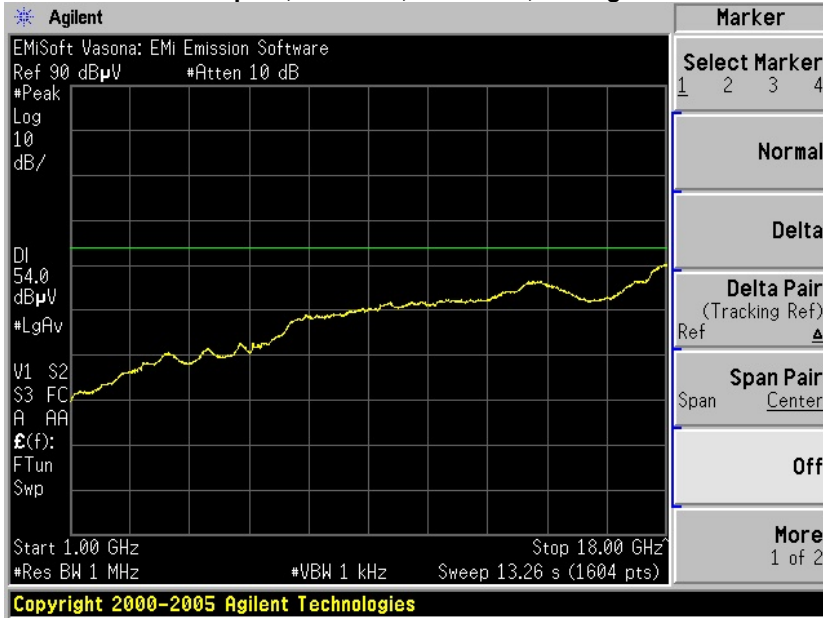

Radiated Receiver Spurs, All Rates, All Modes, Peak

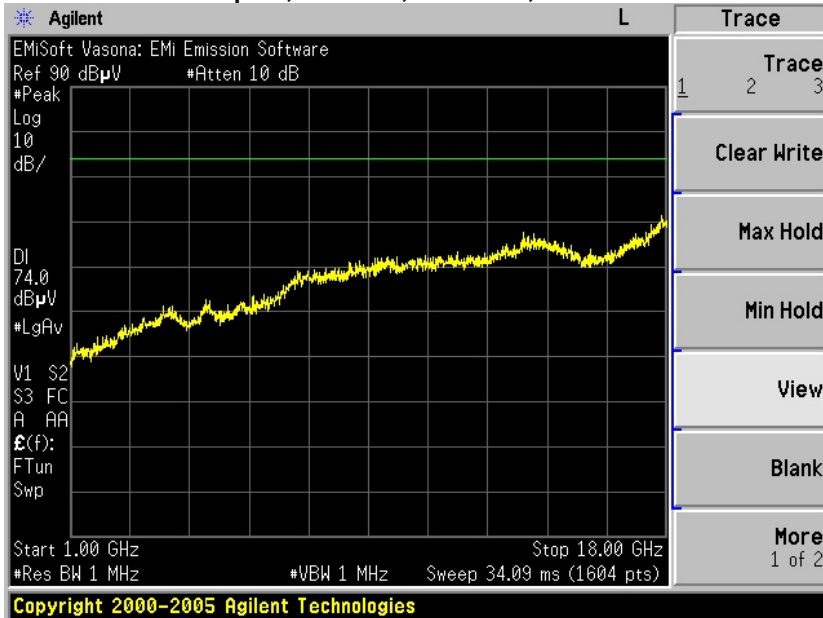




2.4/5 GHz Dual Band 6dBi MIMO patch antenna



2.4 GHz 6 dBi Omni-directional antennas




Conducted emissions

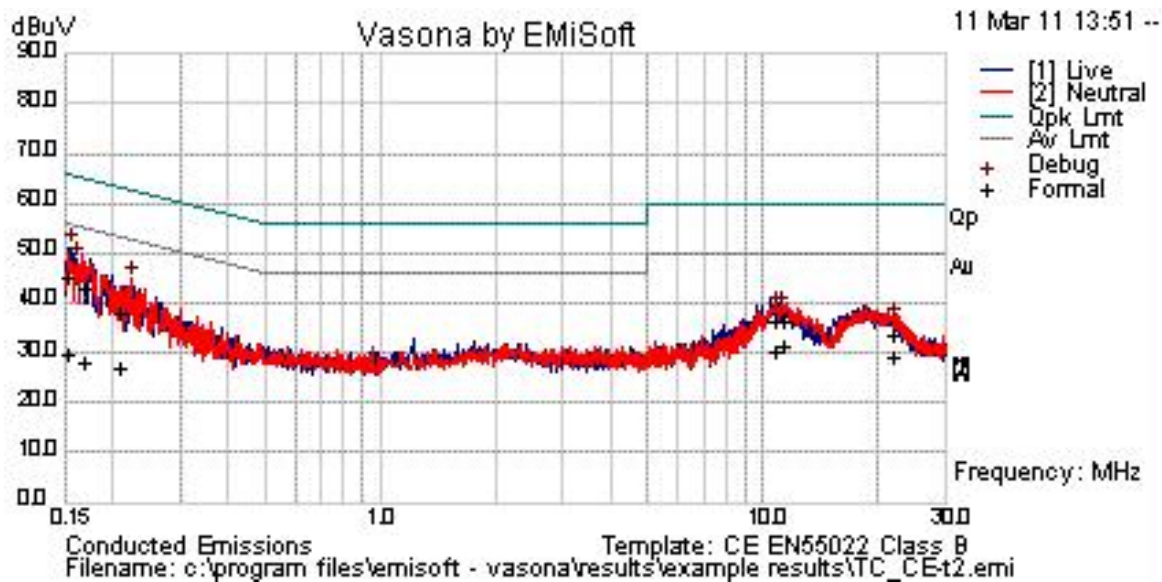

Test Results Table


| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line | Limit dBuV | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|------------|------------|------------------|------|------------|-----------|------------|----------|
| 0.152537 | 6.9 | 21.3 | 1.5 | 29.7 | Av | L | 55.9 | -26.2 | Pass | |
| 0.152537 | 22.4 | 21.3 | 1.5 | 45.2 | Qp | L | 65.9 | -20.7 | Pass | |
| 0.167567 | 6.5 | 20.4 | 1.3 | 28.2 | Av | L | 55.1 | -26.9 | Pass | |
| 0.167567 | 21.4 | 20.4 | 1.3 | 43.1 | Qp | L | 65.1 | -22 | Pass | |
| 0.207367 | 16.8 | 20.2 | 1 | 38 | Qp | N | 63.3 | -25.3 | Pass | |
| 0.207367 | 6 | 20.2 | 1 | 27.2 | Av | N | 53.3 | -26.1 | Pass | |
| 10.834 | 15 | 21.1 | 0.3 | 36.4 | Qp | N | 60 | -23.6 | Pass | |
| 10.834 | 9.1 | 21.1 | 0.3 | 30.5 | Av | N | 50 | -19.5 | Pass | |
| 11.215 | 14.8 | 21.1 | 0.3 | 36.3 | Qp | N | 60 | -23.7 | Pass | |
| 11.215 | 9.9 | 21.1 | 0.3 | 31.3 | Av | N | 50 | -18.7 | Pass | |
| 22.011 | 6.9 | 21.8 | 0.4 | 29.1 | Av | N | 50 | -20.9 | Pass | |
| 22.011 | 11.6 | 21.8 | 0.4 | 33.8 | Qp | N | 60 | -26.2 | Pass | |

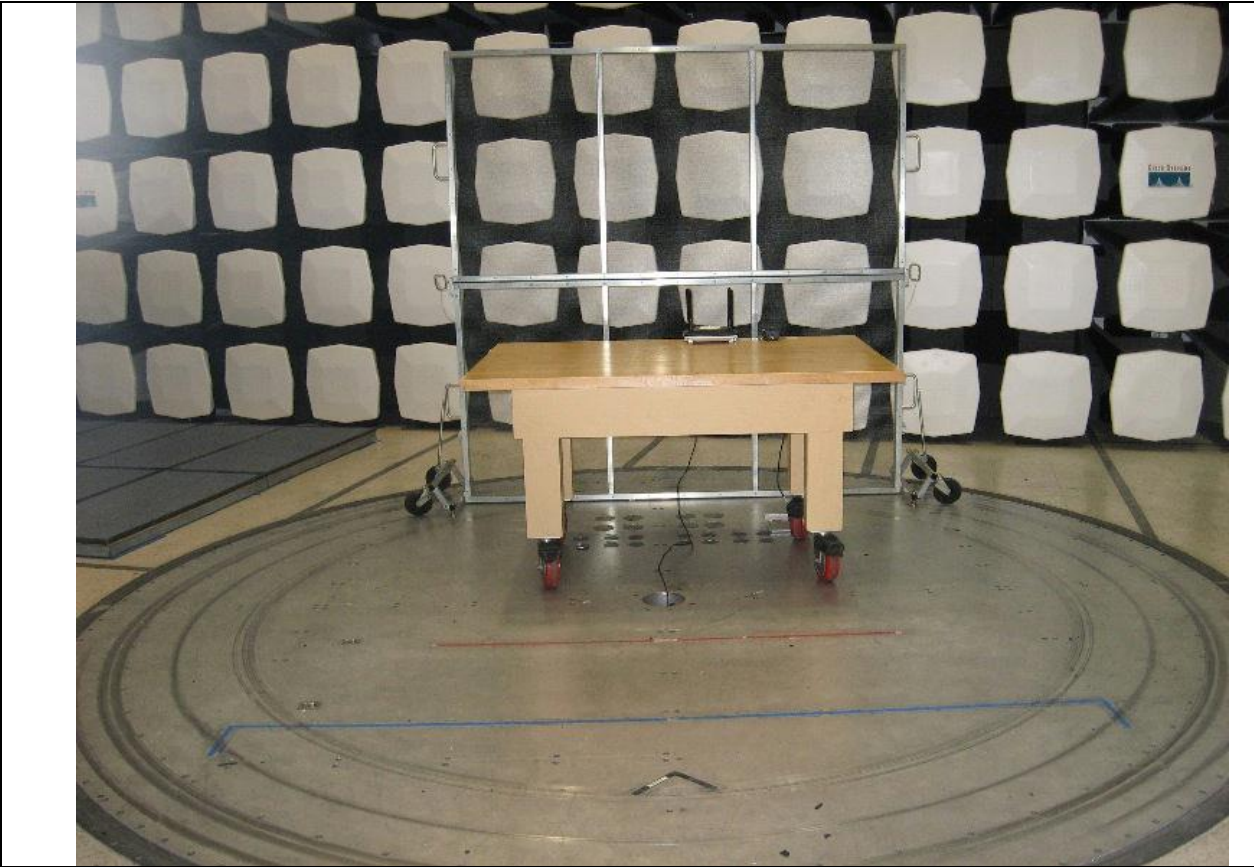

Title: Conducted Emissions Configuration Photograph




Radiated emissions

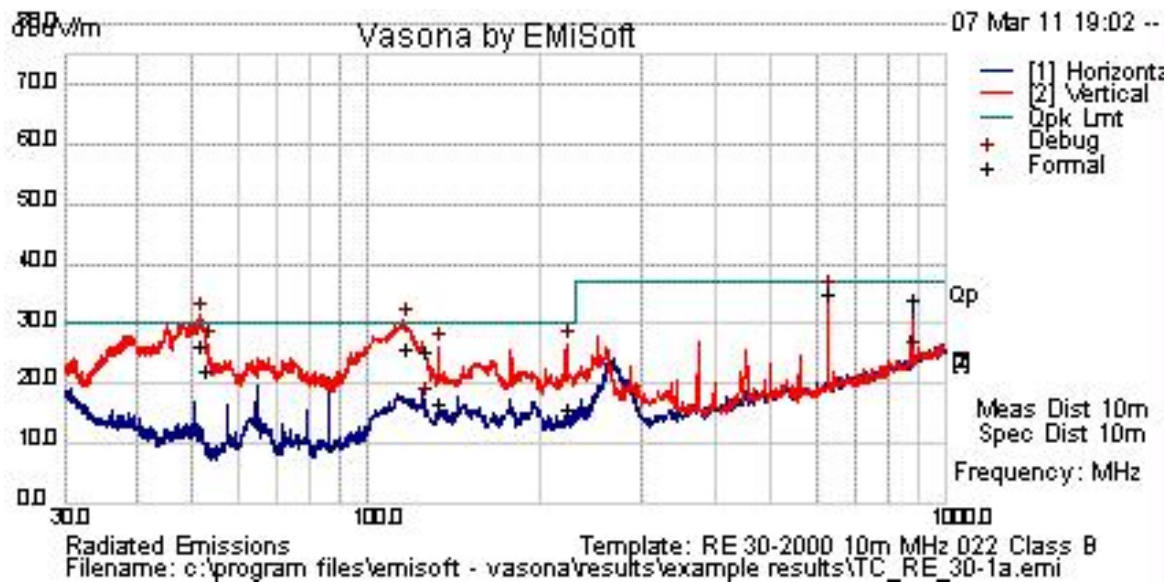

Test Results Table

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurem ent Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|------------------|-------------|---------------|-------|-----------------|----------------------|-----|-----------|------------|-----------------|--------------|---------------|----------|
| 51.658 | 52.2 | 1.2 | -24.6 | 28.9 | Qp | V | 115 | 174 | 30 | -1.1 | Pass | |
| 52.575 | 45.5 | 1.2 | -24.7 | 22 | Qp | V | 326 | 173 | 30 | -8 | Pass | |
| 115.525 | 43 | 1.4 | -18.6 | 25.8 | Qp | V | 253 | 18 | 30 | -4.2 | Pass | |
| 124.993 | 42.2 | 1.5 | -18.4 | 25.3 | Qp | V | 147 | 155 | 30 | -4.7 | Pass | |
| 133.039 | 34.1 | 1.5 | -18.8 | 16.8 | Qp | V | 220 | 145 | 30 | -13.2 | Pass | |
| 220.884 | 35.4 | 1.7 | -21.5 | 15.7 | Qp | V | 247 | 23 | 30 | -14.3 | Pass | |
| 625.031 | 46.1 | 2.5 | -13.1 | 35.5 | Qp | V | 289 | 77 | 37 | -1.5 | Pass | |
| 875.028 | 42.2 | 2.9 | -9.7 | 35.4 | Qp | H | 115 | 69 | 37 | -1.6 | Pass | |

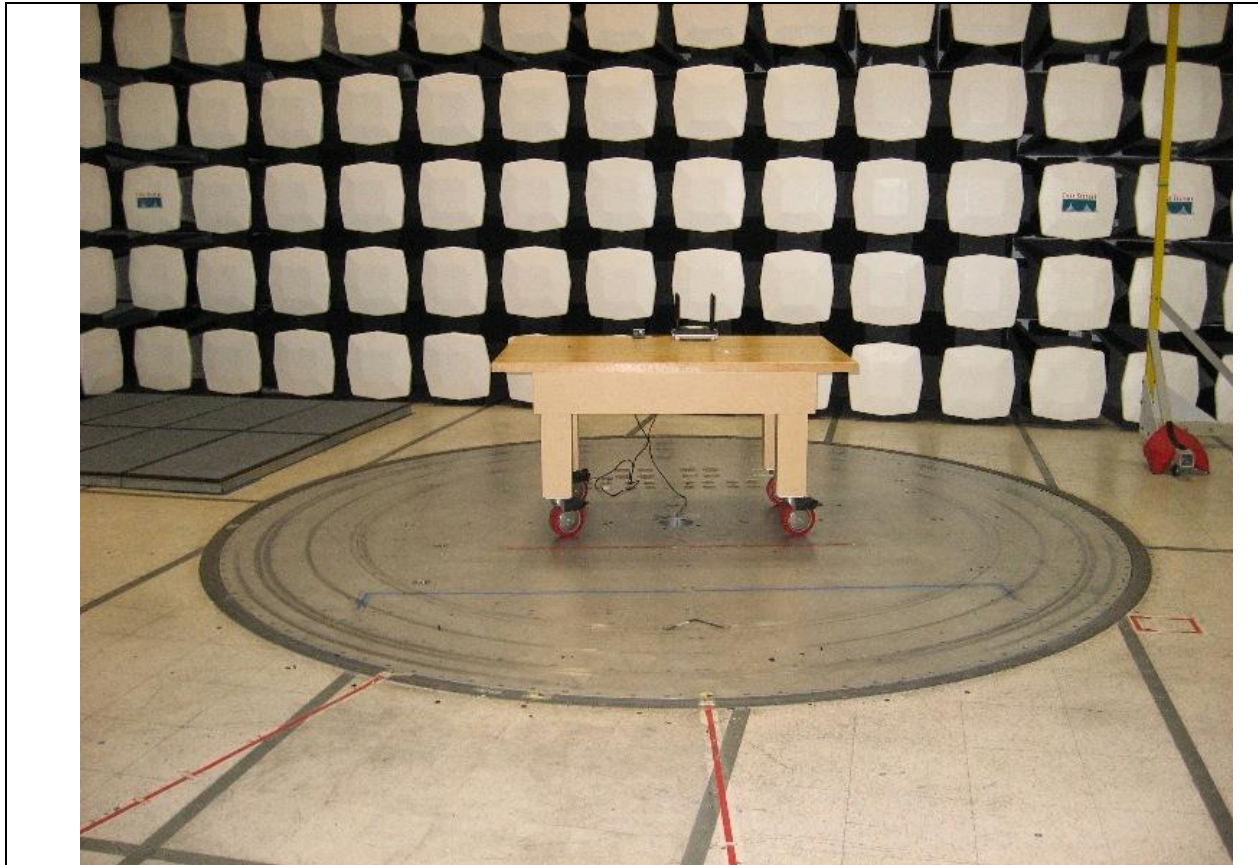

Title: Radiated Emissions Configuration Photograph

Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 * P * G) / d} \quad \text{and} \quad S = E^2 / 3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm²

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W}) / 1000 \quad d(\text{cm}) = 100 * d(\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d=Distance in cm

P=Power in mW

G=Numeric Antenna Gain

S=Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm}) / 10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$s = ((0.282 * 10^{((P + G) / 20)}) / d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm²



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$ maximum. The highest supported antenna gain is 6 dBi (9dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

| Frequency (MHz) | Bit Rate (Mbps) | Power Density (mW/cm ²) | Peak Transmit Power (dBm) | Antenna Gain (dBi) | MPE Distance (cm) | Limit (cm) | Margin (cm) |
|-----------------|-----------------|-------------------------------------|---------------------------|--------------------|-------------------|------------|-------------|
| 2412 | 11 | 1 | 23.0 | 6 | 7.95 | 20 | 12.05 |
| 2437 | 11 | 1 | 23.0 | 6 | 7.95 | 20 | 12.05 |
| 2462 | 11 | 1 | 23.0 | 6 | 7.95 | 20 | 12.05 |
| 2412 | 54 | 1 | 23.0 | 6 | 7.95 | 20 | 12.05 |
| 2437 | 54 | 1 | 23.0 | 6 | 7.95 | 20 | 12.05 |
| 2462 | 54 | 1 | 23.0 | 6 | 7.95 | 20 | 12.05 |

MPE Calculations

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

| Frequency (MHz) | Bit Rate (Mbps) | MPE Distance (cm) | Peak Transmit Power (dBm) | Antenna Gain (dBi) | Power Density (mW/cm ²) | Limit (mW/cm ²) | Margin (mW/cm ²) |
|-----------------|-----------------|-------------------|---------------------------|--------------------|-------------------------------------|-----------------------------|------------------------------|
| 2412 | 11 | 20 | 23.0 | 6 | 0.16 | 1 | 0.84 |
| 2437 | 11 | 20 | 23.0 | 6 | 0.16 | 1 | 0.84 |
| 2462 | 11 | 20 | 23.0 | 6 | 0.16 | 1 | 0.84 |
| 2412 | 54 | 20 | 23.0 | 6 | 0.16 | 1 | 0.84 |
| 2437 | 54 | 20 | 23.0 | 6 | 0.16 | 1 | 0.84 |
| 2462 | 54 | 20 | 23.0 | 6 | 0.16 | 1 | 0.84 |

**Appendix C: Test Equipment/Software Used to perform the test**

| Equip # | Manufacturer | Model | Description | Last Cal | Next Due |
|-----------|-------------------|-----------------------|--------------------------------------|-----------|-----------|
| CIS004882 | EMC Test Systems | 3115 | Double Ridged Guide Horn Antenna | 4-May-10 | 4-May-11 |
| CIS005691 | Miteq | NSP1800-25-S1 | Broadband Preamplifier | 2-Feb-11 | 2-Feb-12 |
| COM000210 | TTE | H785-150K-50-21378 | Hi Pass Filter - 150KHz cutoff | 11-Aug-10 | 11-Aug-11 |
| COM000214 | Fischer | FCC-LISN-50-50-2M | Turntable LISN (150KHz-30MHz) | 5-Mar-11 | 4-Mar-12 |
| CIS021117 | Micro-Coax | UFB311A-0-2484-520520 | RF Coaxial Cable, to 18GHz, 248.4 in | 24-Aug-10 | 24-Aug-11 |
| CIS030564 | Micro-Coax | UFB311A-1-0950-504504 | RF Coaxial Cable, to 18GHz, 95 in | 24-Aug-10 | 24-Aug-11 |
| CIS044005 | MegaPhase | EM18-NKNK-320 | RF N Type Cable 18GHz | 24-Aug-10 | 24-Aug-11 |
| COM000233 | Sunol Sciences | JB1 | Combination Antenna, 30MHz-2GHz | 19-Jul-10 | 19-Jul-11 |
| CIS037227 | Micro-Tronics | BRC50705 | Notch Filter, SB:5.725-5.875GHz | 7-Jul-10 | 7-Jul-11 |
| CIS034972 | Midwest Microwave | ATT-0640-20-29M-02 | Attenuator, 20dB | 17-May-11 | 16-May-12 |
| CIS035610 | Micro-Tronics | BRC50703-02 | Notch Filter, SB:5.150-5.350GHz | 7-Jul-10 | 7-Jul-11 |
| CIS035605 | Micro-Tronics | BRC50704-02 | Notch Filter, SB:5.470-5.725GHz | 7-Jul-10 | 7-Jul-11 |
| CIS034303 | Micro-Tronics | BRM50702-02 | Notch Filter, SB:2.4-2.5GHz | 7-Jul-10 | 7-Jul-11 |
| CIS043116 | Huber + Suhner | Sucoflex 104PE | N & SMA RF cable | 19-Jul-10 | 19-Jul-11 |
| CIS040603 | Agilent | E4440A | Spectrum Analyzer | 4-Aug-10 | 4-Aug-11 |
| CIS040053 | Agilent | E4448A | Spectrum Analyzer | 29-Apr-11 | 28-Apr-12 |