




# FCC and IC Radio Test Report

**Equipment** : Cisco Aironet 700 Series Access Point  
**Brand Name** : CISCO  
**Model No.** : AIR-CAP702I-A-K9, AIR-SAP702I-A-K9,  
AIR-CAP702I-N-K9, AIR-SAP702I-N-K9,  
AIR-CAP702I-Z-K9, AIR-SAP702I-Z-K9  
**FCC ID** : LDK102085  
**IC** : 2461B-102085  
**Standard** : 47 CFR FCC Part 15.407  
IC RSS-210 Issue 8 and RSS-Gen Issue 3  
**Frequency Range** : 5150 MHz – 5250 MHz  
**Equipment Class** : NII  
**Applicant** : CISCO System, Inc.  
170 West Tasman Drive San Jose, CA  
95134-1706  
**Manufacturer** : Wistron NeWeb Corporation  
20 Park Avenue II, Hsinchu Science Park,  
Hsinchu 308, Taiwan, R.O.C.  
**Operate Mode** : Master

The product sample received on Oct. 05, 2012 and completely tested on Apr. 12, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

  
Reviewed by: Jordan Hsiao





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories .....	7
1.3	Support Equipment.....	7
1.4	Testing Applied Standards .....	7
1.5	Testing Location Information .....	7
1.6	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter .....	10
2.4	Target Maximum Channel Power .....	10
2.5	EUT Operation during Test .....	11
2.6	The Worst Case Measurement Configuration.....	11
2.7	Test Setup Diagram .....	13
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>15</b>
3.1	AC Power-line Conducted Emissions .....	15
3.2	Emission Bandwidth .....	18
3.3	RF Output Power.....	31
3.4	Peak Power Spectral Density.....	59
3.5	Peak Excursion .....	87
3.6	Transmitter Conducted Bandedge Emissions.....	97
3.7	Transmitter Conducted Unwanted Emissions.....	153
3.8	Transmitter Radiated Unwanted Emissions .....	166
3.9	Frequency Stability.....	233
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>235</b>
	<b>APPENDIX A. TEST PHOTOS.....</b>	<b>A1 ~ A5</b>
	<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>B1 ~ B4</b>
	<b>APPENDIX C. CO-LOCATION.....</b>	<b>C1 ~ C3</b>



## Summary of Test Result

Conformance Test Specifications						
Report Clause	Ref. Std. Clause	IC Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	-	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	RSS-Gen 7.2.4	AC Power-line Conducted Emissions	[dBuV]: 21.169MHz 38.62 (Margin 11.38dB) - AV 40.70 (Margin 19.30dB) - QP	FCC 15.207 / RSS-Gen 7.2.4	Complied
3.2	15.407(a)	RSS-210 A9.2	Emission Bandwidth	Bandwidth [MHz] 20M:26.08 / 40M:52.64	Information only	Complied
3.3	15.407(a)	RSS-210 A9.2	RF Output Power (Maximum Conducted Output Power)	Power [dBm] 20M:16.91 / 40M:16.97	Power [dBm]:17	Complied
3.4	15.407(a)	RSS-210 A9.2	Peak Power Spectral Density	PPSD [dBm/MHz]: 20M:3.88 / 40M:1.80	PPSD [dBm/MHz]:4	Complied
3.5	15.407(a)	-	Peak Excursion	Peak Excursion [dB] 20M:11.17 / 40M:9.91	13 dB	Complied
3.6	15.407(b)	RSS-210 A9.2	Transmitter Conducted Bandedge Emissions	[dBm]: -27.06(Margin 5.81dB) - PK -43.29(Margin 2.04dB) - AV	Non-Restricted Bands: ≤ -27dBm Restricted Bands: FCC 15.209 / RSS-Gen 7.2.5 PK: -21.25dBm AV: -41.25dBm	Complied
3.7	15.407(b)	RSS-210 A9.2	Transmitter Conducted Unwanted Emissions	-39.19dB (Margin 1.19dB)	e.i.r.p. -27 dBm	Complied
3.8	15.407(b)	RSS-210 A9.2	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 41.09MHz 36.65 (Margin 3.35dB) - QP	Restricted Bands: FCC 15.209 / RSS-Gen 7.2.5	Complied
3.9	15.407(g)	-	Frequency Stability	1.63 ppm	Signal shall remain in-band	Complied



## Revision History

Report No.	Version	Description	Issued Date
FR281405-03AC	Rev. 01	Initial issue of report	Apr. 17, 2013



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Operating Mode	Ch. Freq. (MHz)	Channel Number	Co-location
5150-5250	Non HT-20, 6 to 54Mbps	5180-5240	36-48 [4]	Yes
5150-5250	Non HT-20, Beam Forming, 6 to 54Mbps	5180-5240	36-48 [4]	Yes
5150-5250	HT-20, M0 to M15	5180-5240	36-48 [4]	Yes
5150-5250	HT-20, STBC, M0 to M7	5180-5240	36-48 [4]	Yes
5150-5250	HT-20, Beam Forming, M0 to M7	5180-5240	36-48 [4]	Yes
5150-5250	HT-20, Beam Forming, M8 to M15	5180-5240	36-48 [4]	Yes
5150-5250	HT-40, M0 to M15	5190-5230	38-46 [2]	Yes
5150-5250	HT-40, STBC, M0 to M7	5190-5230	38-46 [2]	Yes
5150-5250	HT-40, Beam Forming, M0 to M7	5190-5230	38-46 [2]	Yes
5150-5250	HT-40, Beam Forming, M8 to M15	5190-5230	38-46 [2]	Yes

Note 1: RF output power specifies that Maximum Conducted Output Power.  
Note 2: Non HT-20 / HT-20 / HT-40 uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.  
Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

### 1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	WNC	WNC	PIFA Antenna	I-PEX	5
2	WNC	WNC	PIFA Antenna	I-PEX	5


### 1.1.3 EUT Description

Operating Mode	Non HT-20 6 to 54Mbps		Non HT-20 BF 6 to 54Mbps		HT-20 M0 to M15		HT-20 STBC M0 to M7		HT-20BF M0 to M7		HT-20 BF M8 to M15	
	1	2	1	2	1	2	1	2	1	2	1	2
Tx	1	2	1	2	1	2	1	2	1	2	1	2
Single (Tx)	V	-	-	-	V	-	-	-	-	-	-	-
Two (Tx)	V	V	V	V	V	V	V	V	V	V	V	V

Note: BF: Beam Forming

Operating Mode	HT-40 M0 to M15		HT-40 STBC M0 to M7		HT-40 BF M0 to M7		HT-40 BF M8 to M15	
	1	2	1	2	1	2	1	2
Tx	1	2	1	2	1	2	1	2
Single (Tx)	V	-	-	-	-	-	-	-
Two (Tx)	V	V	V	V	V	V	V	V

Note: BF: Beam Forming

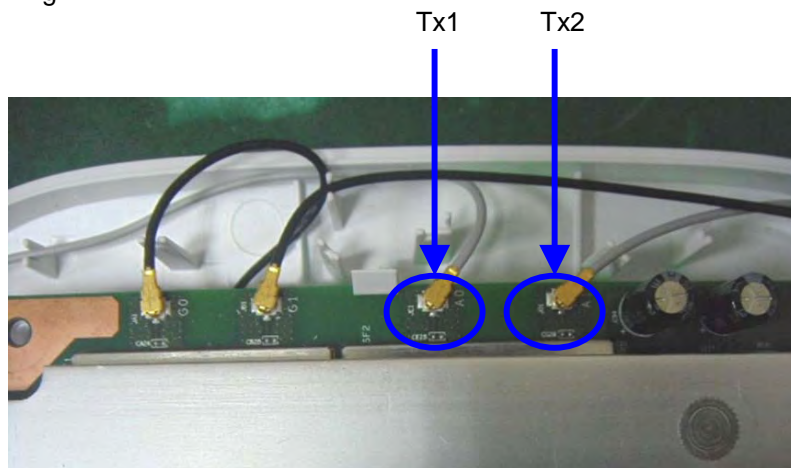

### 1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
The EUT has six model names. All the models are identical; the different model names served as marketing strategy.	
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

### 1.1.5 EUT Operational Condition

EUT Power Type	From Power Adapter / POE
----------------	--------------------------



### 1.2 Accessories

Accessories					
No.	Equipment Name	Brand Name	Model Name	Rating	Remark
1	AC Adapter	CISCO	AA25480L	INPUT: 100-240V ~ 600mA, 50/60Hz OUTPUT: 48V, 380mA	With power cable
2	AC Adapter	CISCO	EADP-18MB B	INPUT: 100-240V ~ 0.5A, 50-60Hz OUTPUT: 48V, 0.38A	With power cable

### 1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	M1330	E2KWM3945ABG
2	Notebook	DELL	E6220	E2KWM3945ABG
3	Notebook	DELL	E6220	E2KWM3945ABG
4	Notebook	DELL	E6400	E2KWM3945ABG
5	POE	CISCO	DPSN-35FB A	N/A
6	POE	CISCO	POE30U-560(G)	N/A
7	POE Switch	MOTOROLA	RFS-4010	N/A

### 1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 789033
- ◆ FCC KDB 662911
- ◆ FCC KDB 412172
- ◆ IC RSS-210 Issue 8 and RSS-Gen Issue 3

### 1.5 Testing Location Information

Testing Location			
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055	
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085	
Test Condition	Test Site No.	Test Engineer	Test Environment
RF Conducted	TH01-CB	Satoshi Yang	24°C / 60%
AC Conduction	CO01-CB	Sollo Luo	24°C / 64%
Radiated Emission	03CH01-CB	Satoshi Yang	24°C / 60%



## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing	
Operating Mode	Worst Data Rate / MCS
Non HT-20, 6 to 54Mbps	6Mbps
Non HT-20, Beam Forming, 6 to 54Mbps	6Mbps
HT-20, M0 to M15	6.5Mbps (M0)
HT-20, STBC, M0 to M7	6.5Mbps (M0)
HT-20, Beam Forming, M0 to M7	6.5Mbps (M0)
HT-20, Beam Forming, M8 to M15	13Mbps (M8)
HT-40, M0 to M15	13.5Mbps (M0)
HT-40, STBC, M0 to M7	13.5Mbps (M0)
HT-40, Beam Forming, M0 to M7	13.5Mbps (M0)
HT-40, Beam Forming, M8 to M15	27Mbps (M8)

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 400ns.

Note 2: Modulation modes consist of below configuration:  
M: Modulation and Coding Scheme

Note 3: RF output power specifies that Maximum Conducted Output Power.

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Operating Mode	Test Channel Frequencies (MHz)
Non HT-20, 6 to 54Mbps	5180, 5200, 5240
Non HT-20, Beam Forming, 6 to 54Mbps	
HT-20, M0 to M15	
HT-20, STBC, M0 to M7	
HT-20, Beam Forming, M0 to M7	
HT-20, Beam Forming, M8 to M15	
HT-40, M0 to M15	5190, 5230
HT-40, STBC, M0 to M7	
HT-40, Beam Forming, M0 to M7	
HT-40, Beam Forming, M8 to M15	

### 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter						
Test Software Version	ART 2 GUI:2.3					
Operating Mode	N <sub>TX</sub>	Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5180	5200	5240	5190	5230
Non HT-20, 6 to 54Mbps	1	16.5	16	16	-	-
Non HT-20, 6 to 54Mbps	2	10.5	10.5	10	-	-
Non HT-20, Beam Forming, 6 to 54Mbps	2	10.5	10.5	10	-	-
HT-20, M0 to M7	1	17	16.5	16	-	-
HT-20, M0 to M15	2	11	11	10.5	-	-
HT-20, STBC, M0 to M7	2	13.5	13	12.5	-	-
HT-20, Beam Forming, M0 to M7	2	11	11	10.5	-	-
HT-20, Beam Forming, M8 to M15	2	14	14	13.5	-	-
HT-40, M0 to M7	1	-	-	-	12.5	16
HT-40, M0 to M15	2	-	-	-	10	10
HT-40, STBC, M0 to M7	2	-	-	-	14	14
HT-40, Beam Forming, M0 to M7	2	-	-	-	10	10
HT-40, Beam Forming, M8 to M15	2	-	-	-	14	14

### 2.4 Target Maximum Channel Power

Operating Mode	N <sub>TX</sub>	Target Maximum Channel Power (dBm)		
		Frequency (MHz)		
		5180	5200	5240
Non HT-20, 6 to 54Mbps	1	16.69	16.57	16.63
Non HT-20, 6 to 54Mbps	2	13.29	13.37	13.72
Non HT-20, Beam Forming, 6 to 54Mbps	2	13.29	13.37	13.72
HT-20, M0 to M7	1	16.91	16.73	16.54
HT-20, M0 to M15	2	13.93	14.08	13.90
HT-20, STBC, M0 to M7	2	16.31	16.08	15.96
HT-20, Beam Forming, M0 to M7	2	13.93	14.08	13.90
HT-20, Beam Forming, M8 to M15	2	16.90	16.91	16.88
		<b>5190</b>	<b>5230</b>	
HT-40, M0 to M7	1	13.13	16.68	
HT-40, M0 to M15	2	13.06	13.05	
HT-40, STBC, M0 to M7	2	16.97	16.95	
HT-40, Beam Forming, M0 to M7	2	13.06	13.05	
HT-40, Beam Forming, M8 to M15	2	16.96	16.82	



## 2.5 EUT Operation during Test

During the test, "ART 2 GUI:2.3" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

## 2.6 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Test Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Test Mode</b>	Normal Link
1	EUT with AC Adapter 1 (CISCO AA25480L)
2	EUT with AC Adapter 2 (CISCO EADP-18MB B)


For test mode 2 is the worst case and it was record in this test report.


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Emission Bandwidth RF Output Power Peak Power Spectral Density Peak Excursion Transmitter Conducted Bandedge Emissions Transmitter Conducted Unwanted Emissions Frequency Stability
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Operating Mode</b>	Non HT-20 / Non HT-20, Beam Forming / HT-20 / HT-20, STBC / HT-20, Beam Forming / HT-40 / HT-40, STBC / HT-40, Beam Forming



The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions
<b>Test Condition</b>	Radiated measurement
<b>Test Mode &lt; 1GHz</b>	Normal Link
1	Stand-up of EUT with AC Adapter 1 (CISCO AA25480L)
2	Laying-flat of EUT with AC Adapter 1 (CISCO AA25480L)
Mode 1 has been evaluated to be the worst case, thus measurement will follow this same test mode.	
3	Stand-up of EUT with AC Adapter 2 (CISCO EADP-18MB B)
4	Stand-up of EUT with POE 1 (CISCO DPSN-35FB A)
5	Stand-up of EUT with POE 2 (CISCO POE30U-560(G))
6	Stand-up of EUT with POE Switch (MOTOROLA RFS-4010)
For test mode 4 is the worst case and it was record in this test report.	
<b>Operating Mode</b>	Non HT-20 / Non HT-20, Beam Forming / HT-20 / HT-20, STBC / HT-20, Beam Forming / HT-40 / HT-40, STBC / HT-40, Beam Forming
<b>Test Mode &gt; 1GHz</b>	Continuously transmit RF signal
1	Stand-up of EUT
2	Laying-flat of EUT
For test mode 2 is the worst case and it was record in this test report.	

## 2.7 Test Setup Diagram

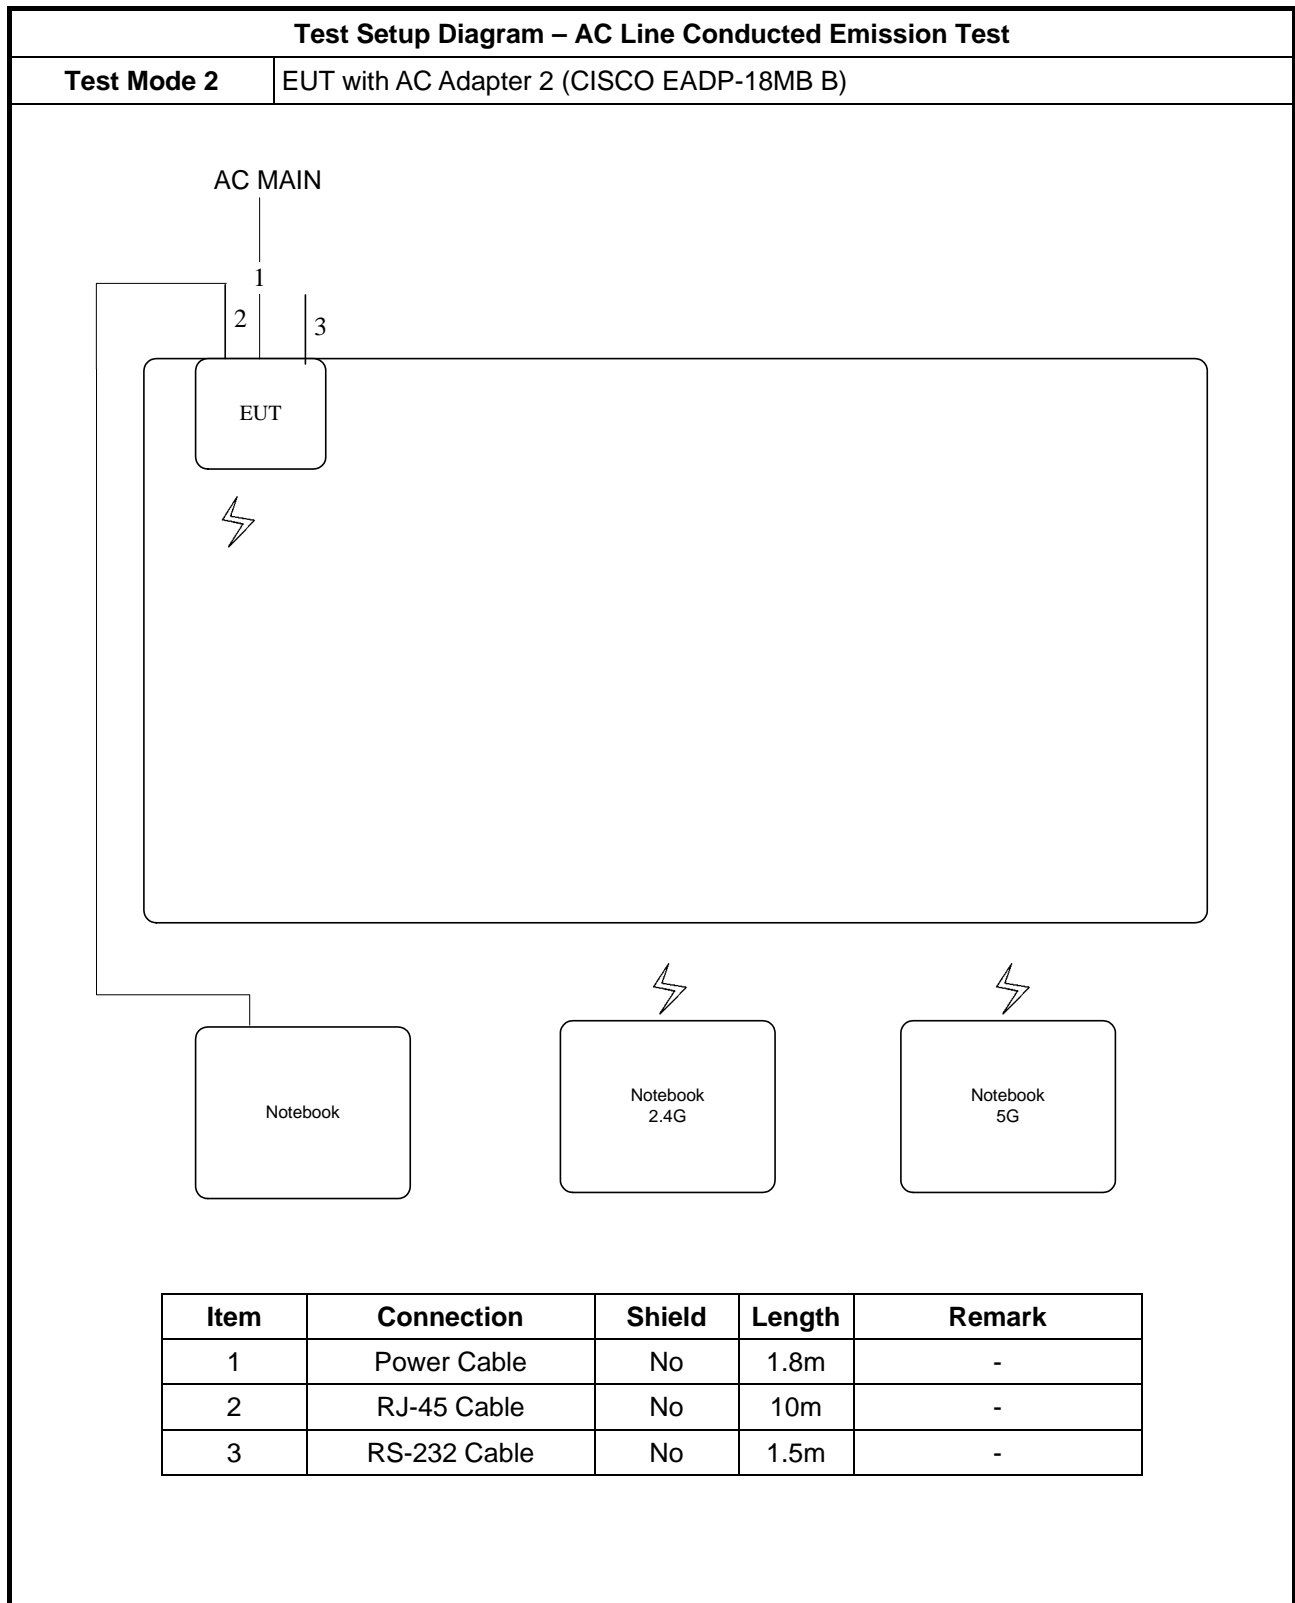

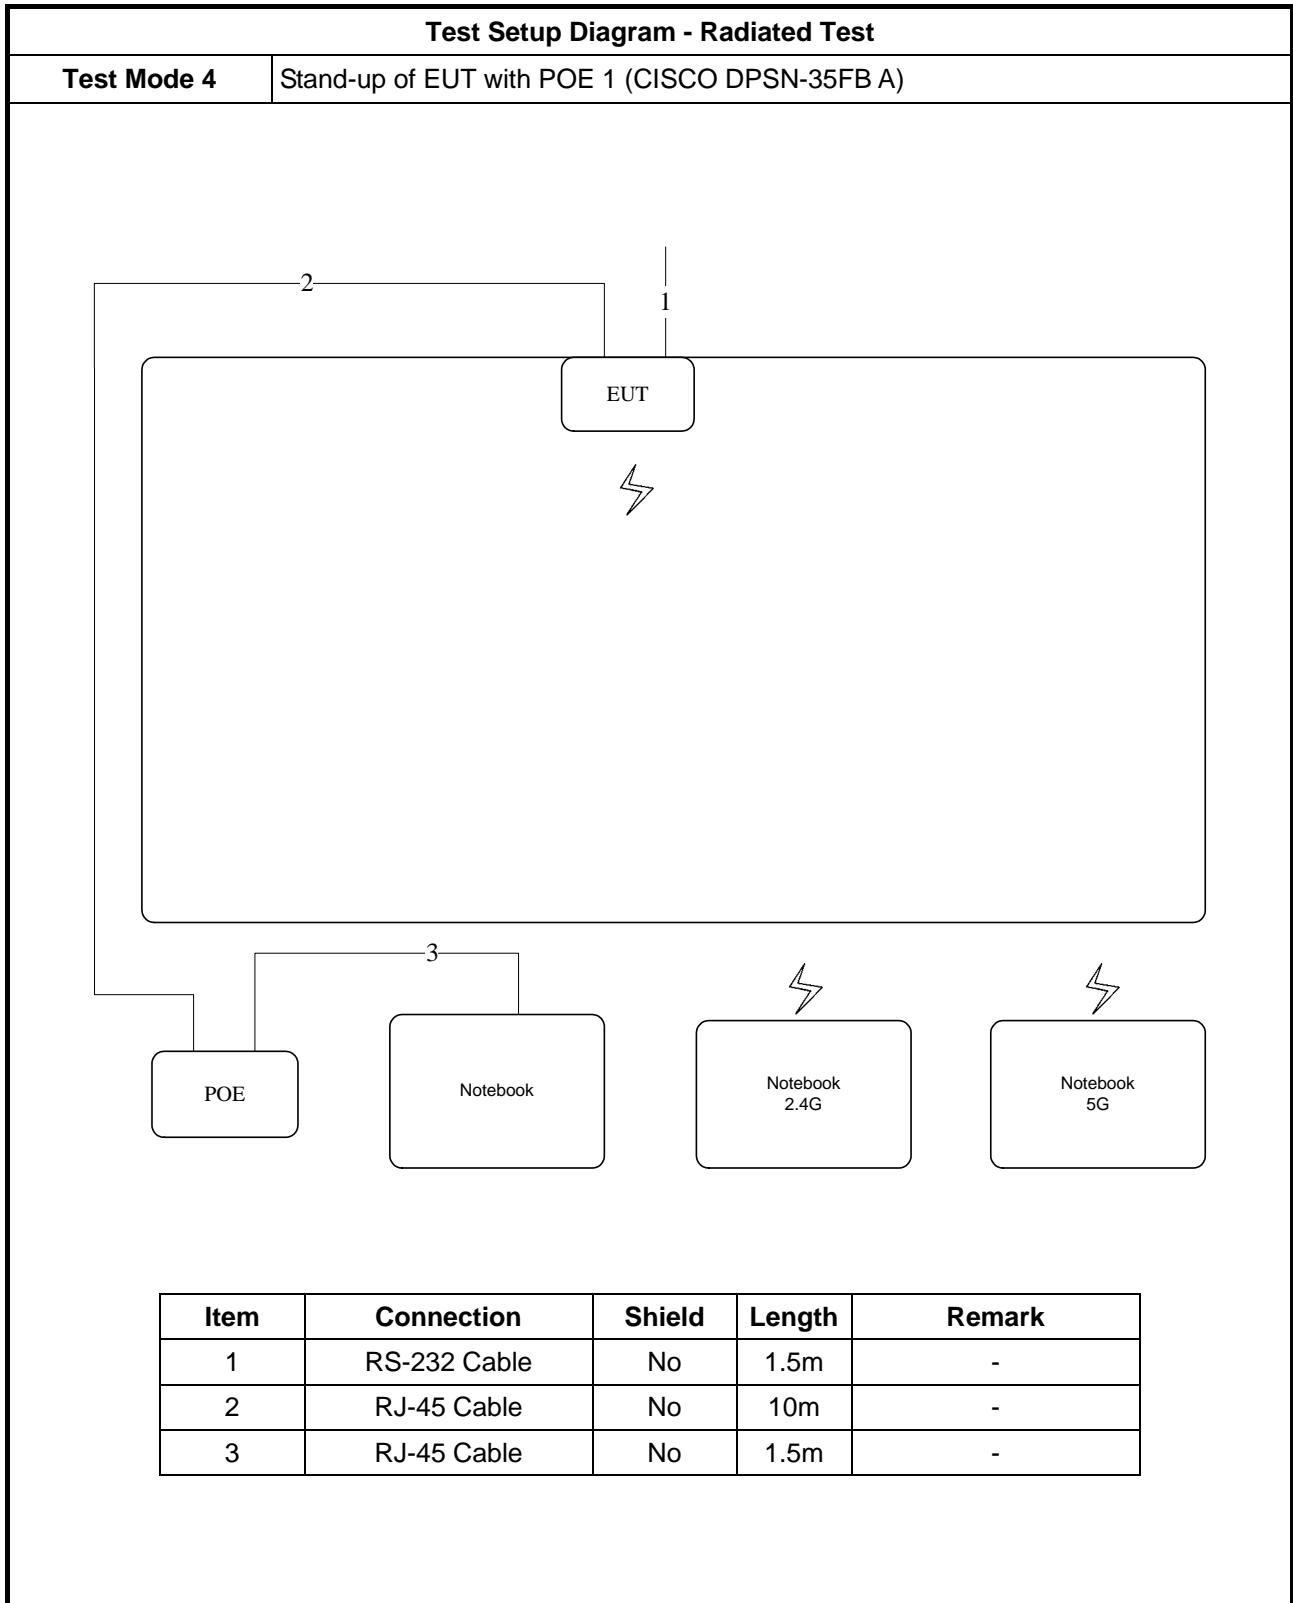

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

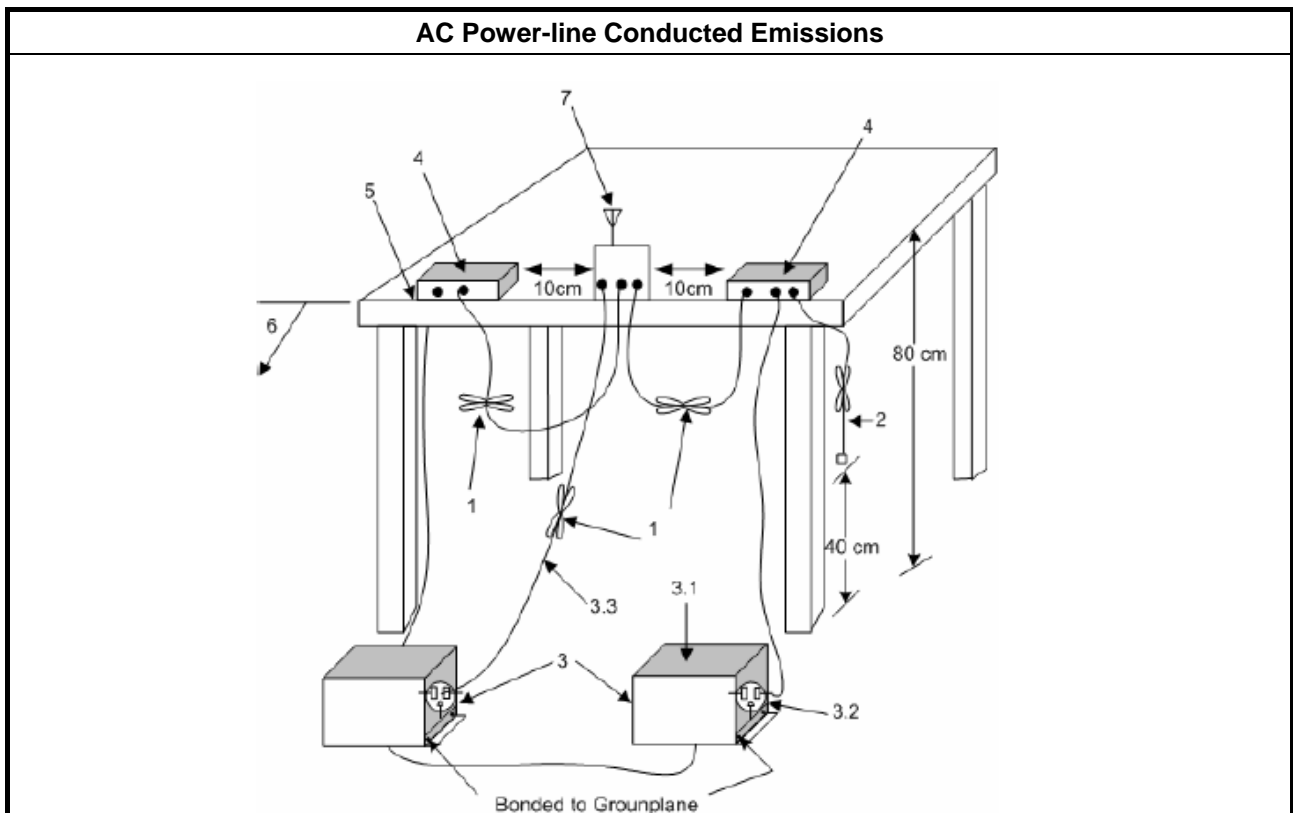



3.1.5 Test Result of AC Power-line Conducted Emissions

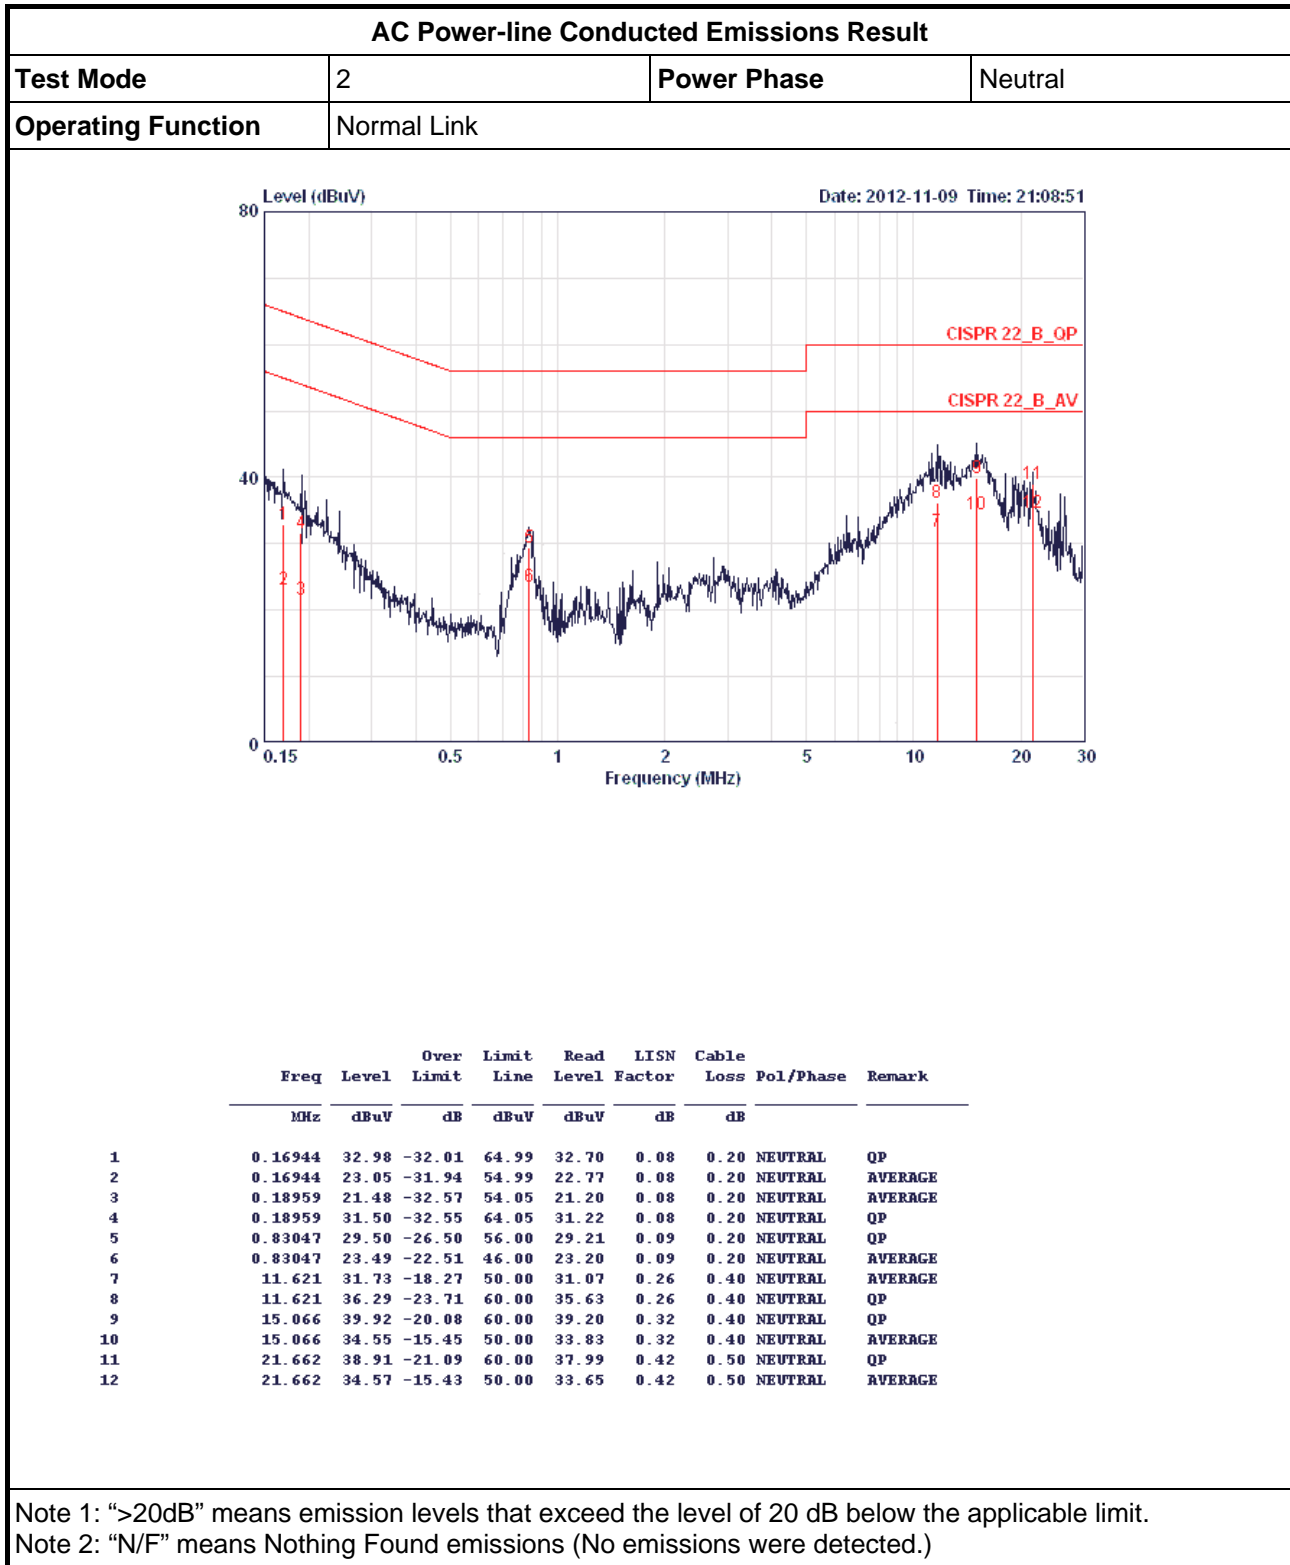






AC Power-line Conducted Emissions Result

Test Mode	2	Power Phase	Line
Operating Function	Normal Link		

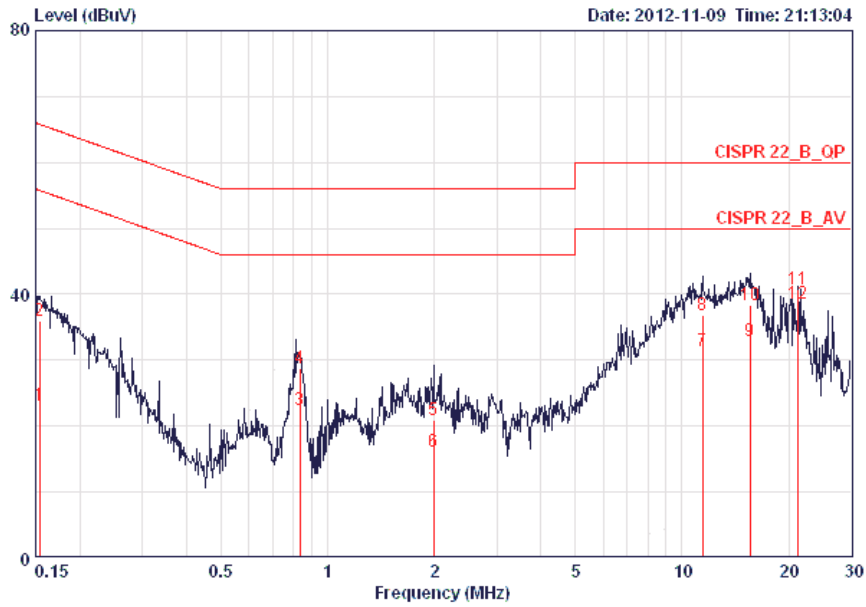

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15403	23.07	-32.71	55.78	22.71	0.16	0.20	LINE	AVERAGE
2	0.15403	36.02	-29.76	65.78	35.66	0.16	0.20	LINE	QP
3	0.83337	22.47	-23.53	46.00	22.11	0.16	0.20	LINE	AVERAGE
4	0.83337	28.81	-27.19	56.00	28.45	0.16	0.20	LINE	QP
5	1.991	20.87	-35.13	56.00	20.48	0.19	0.20	LINE	QP
6	1.991	16.05	-29.95	46.00	15.66	0.19	0.20	LINE	AVERAGE
7	11.438	31.31	-18.69	50.00	30.55	0.36	0.40	LINE	AVERAGE
8	11.438	36.85	-23.15	60.00	36.09	0.36	0.40	LINE	QP
9	15.552	32.98	-17.02	50.00	32.16	0.42	0.40	LINE	AVERAGE
10	15.552	38.45	-21.55	60.00	37.63	0.42	0.40	LINE	QP
11	21.169	40.70	-19.30	60.00	39.70	0.50	0.50	LINE	QP
12	21.169	38.62	-11.38	50.00	37.62	0.50	0.50	LINE	AVERAGE

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

### 3.2 Emission Bandwidth

#### 3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit
For the 5.15-5.25 GHz band, the maximum conducted output power shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause D for EBW measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

#### 3.2.4 Test Setup

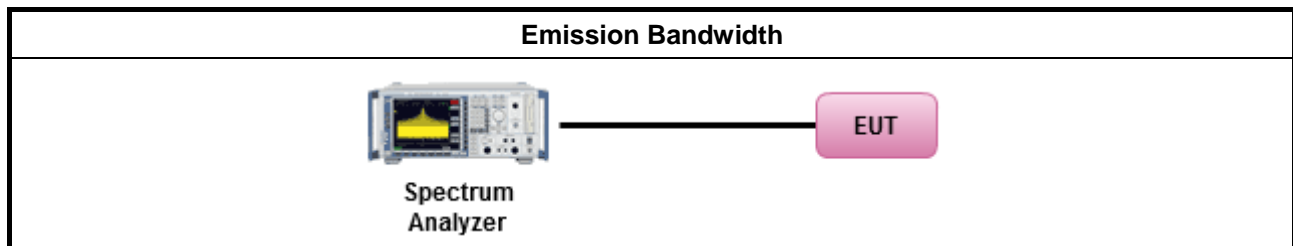





3.2.5 Test Result of Emission Bandwidth

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	99% BW (MHz)	26dB BW (MHz)
5180	Non HT-20, 6 to 54Mbps	6	17.44	24.56
	Non HT-20, Beam Forming, 6 to 54Mbps	6	17.12	23.52
	HT-20, M0 to M7	M0	18.48	25.84
	HT-20, Beam Forming, M0 to M7	M0	18.4	25.04
	HT-20, Beam Forming, M8 to M15	M8	18.24	24.24
5200	Non HT-20, 6 to 54Mbps	6	17.6	24.96
	Non HT-20, Beam Forming, 6 to 54Mbps	6	17.12	23.84
	HT-20, M0 to M7	M0	18.48	25.36
	HT-20, Beam Forming, M0 to M7	M0	18.4	25.04
	HT-20, Beam Forming, M8 to M15	M8	18.32	24.8
5240	Non HT-20, 6 to 54Mbps	6	17.44	24.4
	Non HT-20, Beam Forming, 6 to 54Mbps	6	17.12	23.76
	HT-20, M0 to M7	M0	18.48	26.08
	HT-20, Beam Forming, M0 to M7	M0	18.4	25.36
	HT-20, Beam Forming, M8 to M15	M8	18.24	24.4
5190	HT-40, M0 to M7	M0	36.96	49.28
	HT-40, Beam Forming, M0 to M7	M0	38.56	52.64
	HT-40, Beam Forming, M8 to M15	M8	38.24	52.16
5230	HT-40, M0 to M7	M0	32.96	48.32
	HT-40, Beam Forming, M0 to M7	M0	38.56	51.36
	HT-40, Beam Forming, M8 to M15	M8	38.08	52


26 dB and 99% Bandwidth Plot on 5180 MHz, Non HT-20, 6Mbps

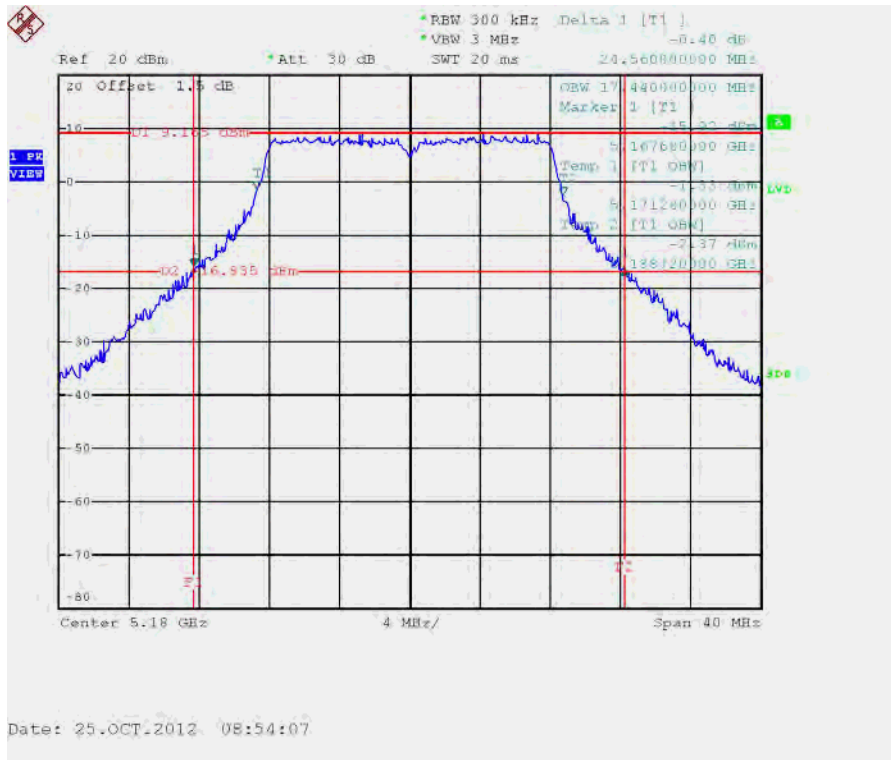


26 dB and 99% Bandwidth Plot on 5180 MHz, Non HT-20, Beam Forming, 6Mbps

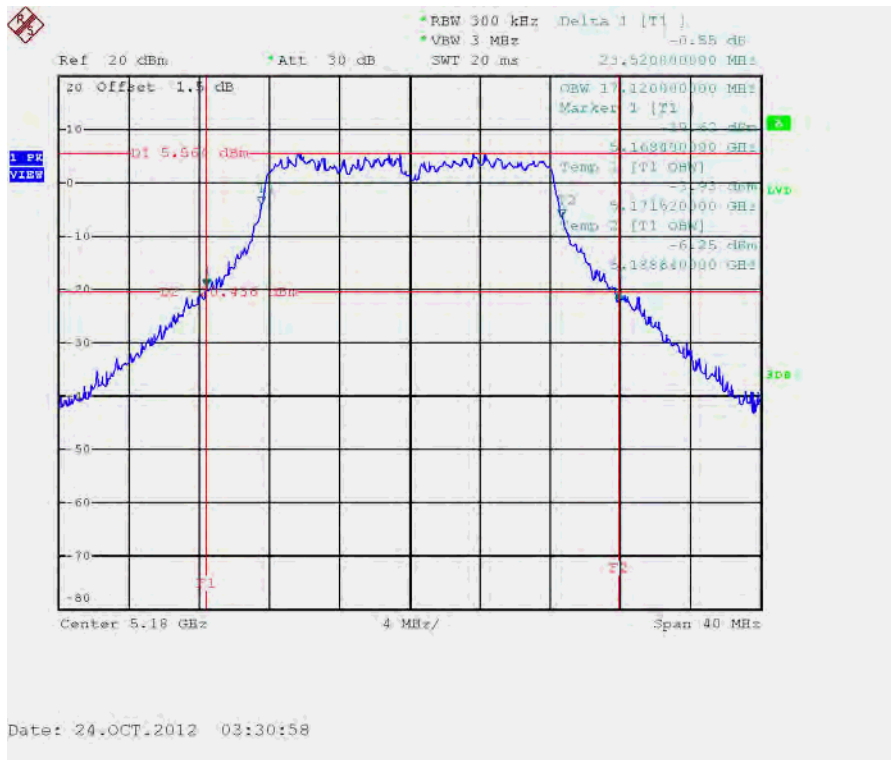

26 dB and 99% Bandwidth Plot on 5180 MHz, HT-20, M0

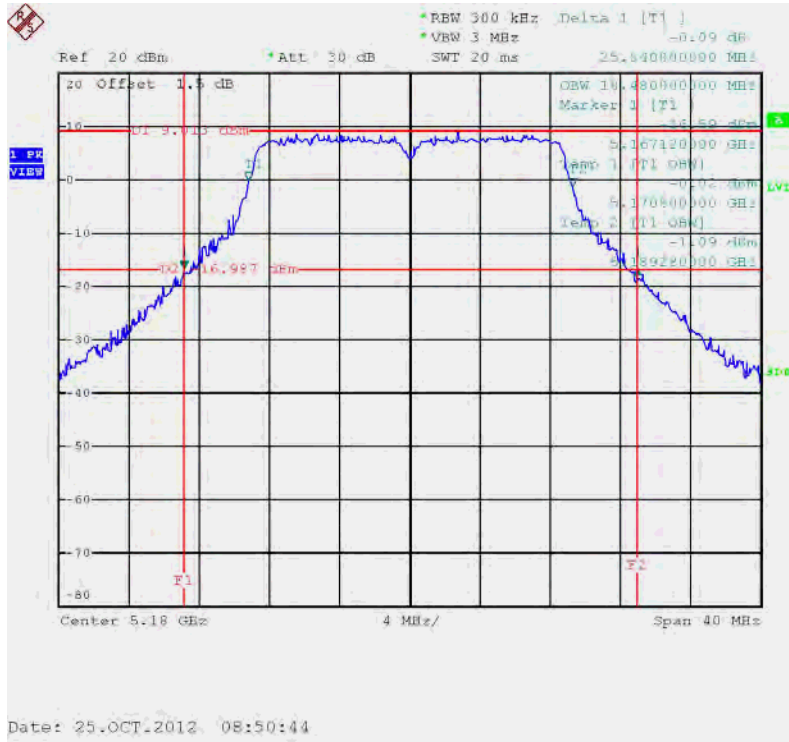


26 dB and 99% Bandwidth Plot on 5180 MHz, HT-20, Beam Forming, M0

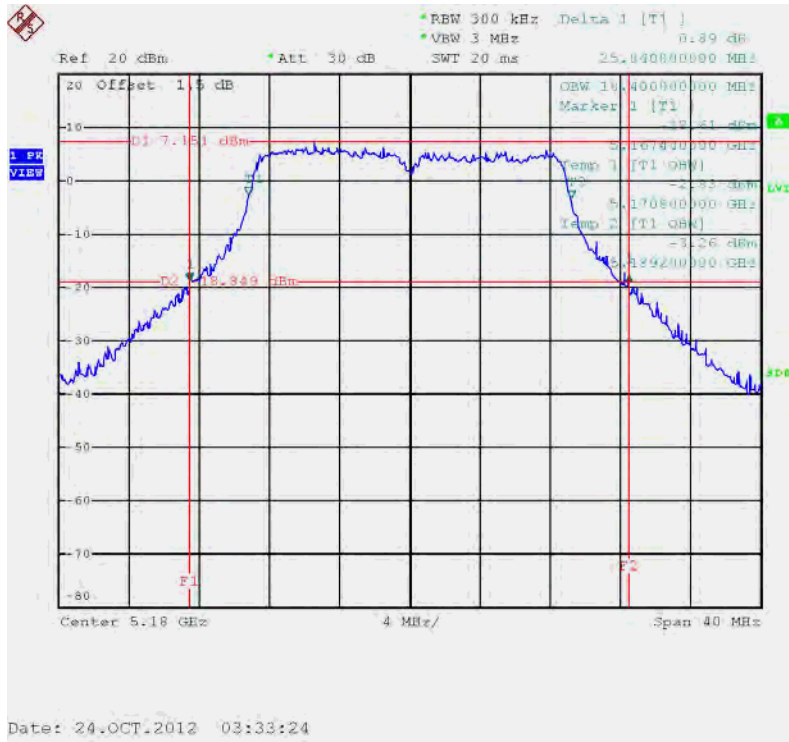




26 dB and 99% Bandwidth Plot on 5180 MHz, HT-20, Beam Forming, M8

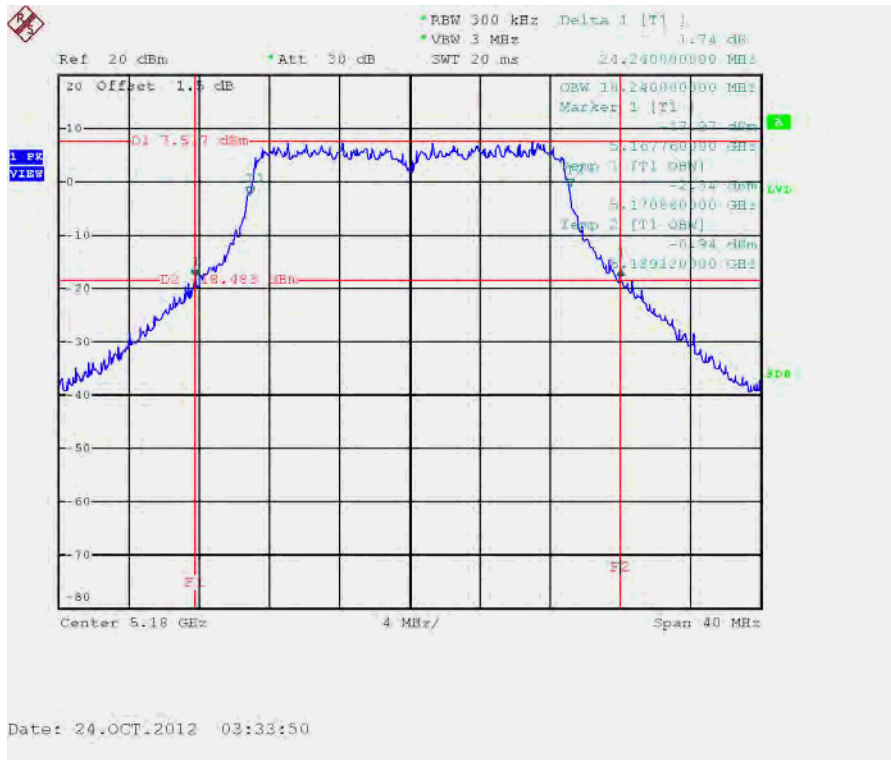


26 dB and 99% Bandwidth Plot on 5200 MHz, Non HT-20, 6Mbps

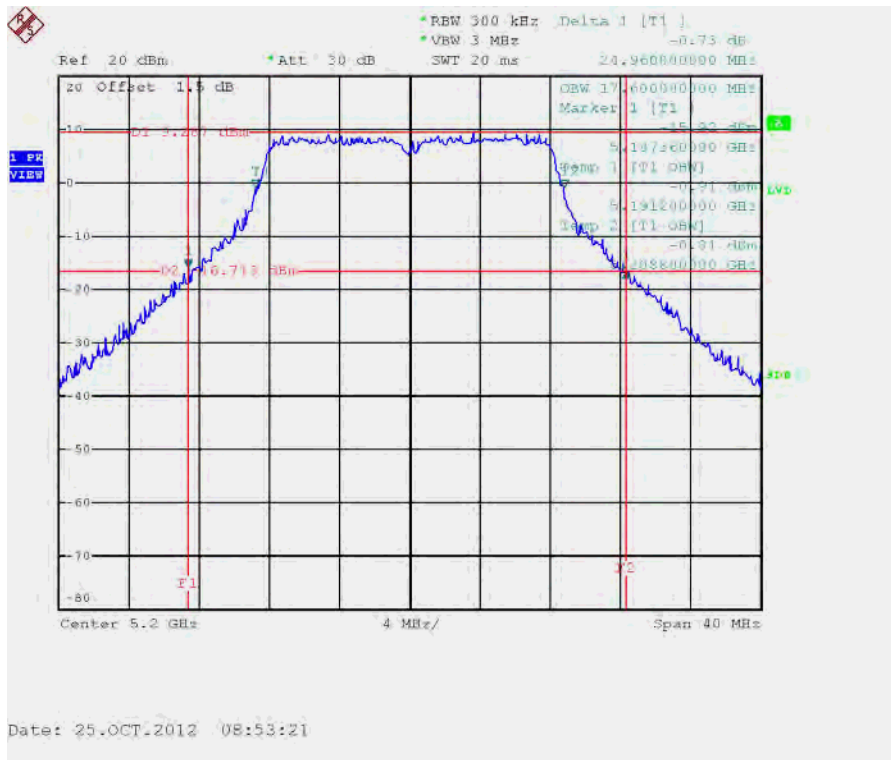




26 dB and 99% Bandwidth Plot on 5200 MHz, Non HT-20, Beam Forming, 6Mbps

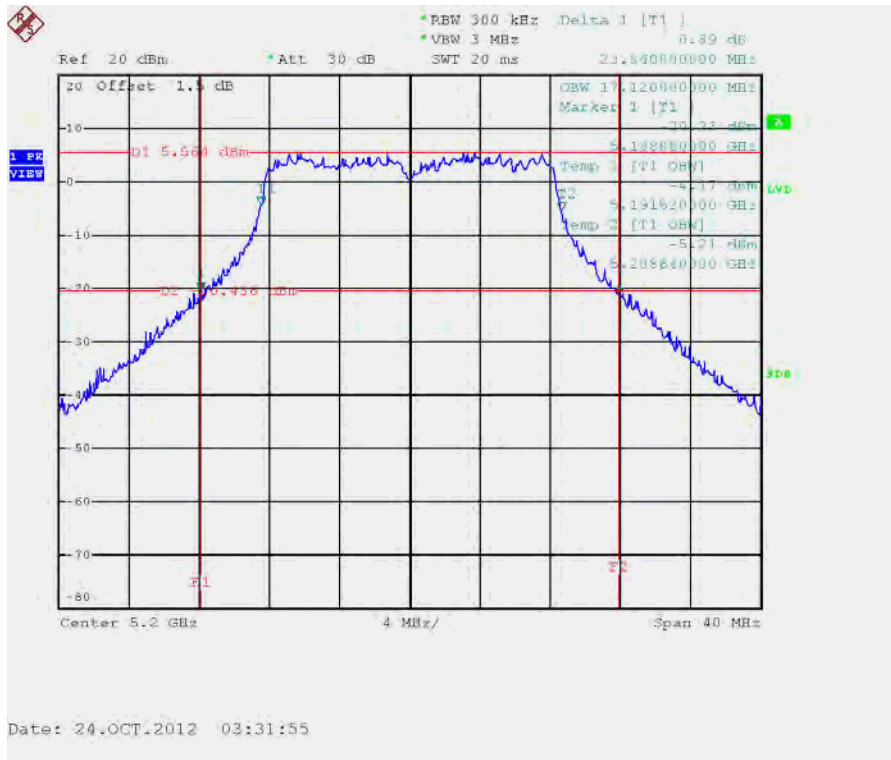


26 dB and 99% Bandwidth Plot on 5200 MHz, HT-20, M0

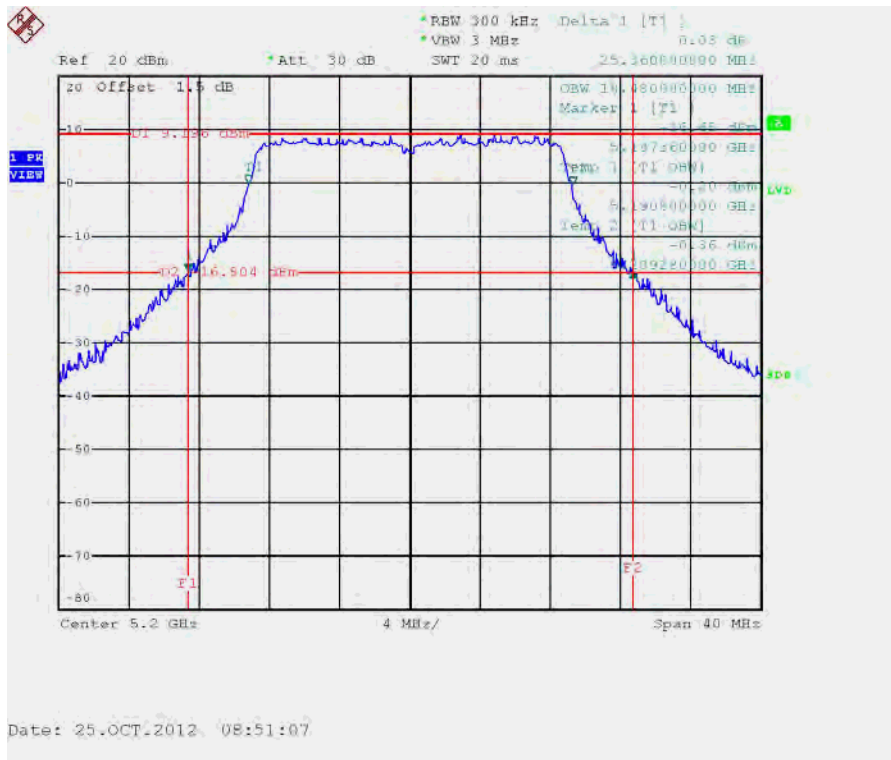




26 dB and 99% Bandwidth Plot on 5200 MHz, HT-20, Beam Forming, M0

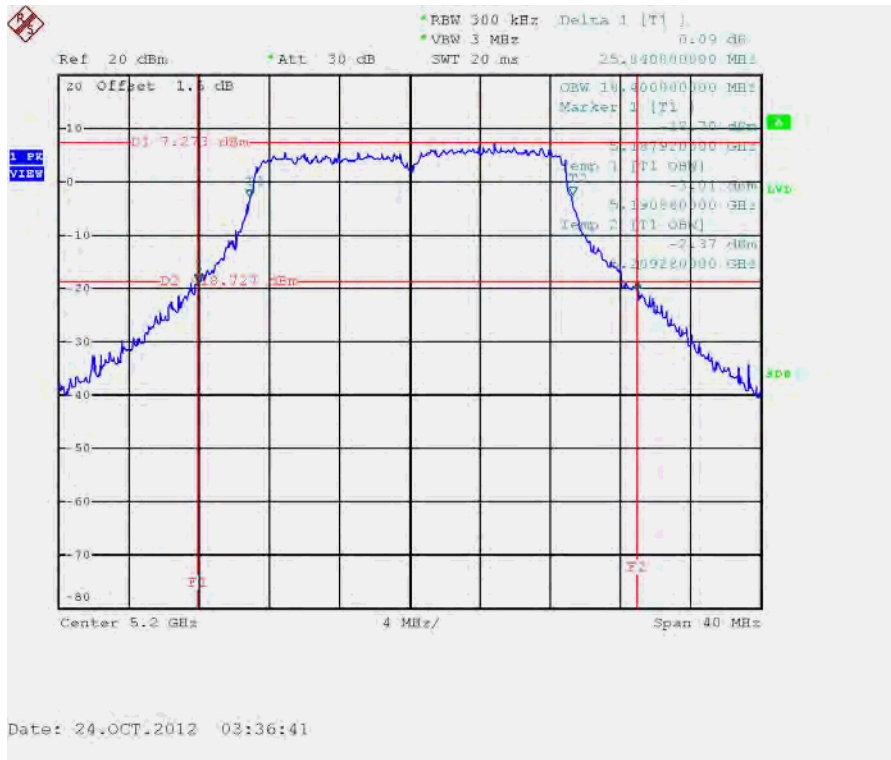


26 dB and 99% Bandwidth Plot on 5200 MHz, HT-20, Beam Forming, M8

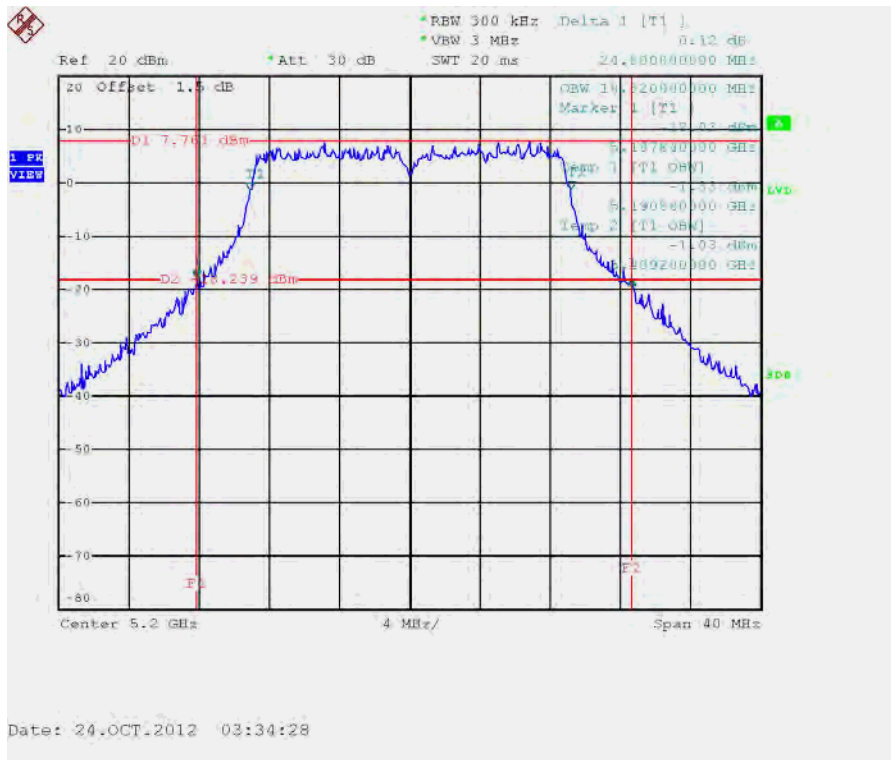






26 dB and 99% Bandwidth Plot on 5240 MHz, Non HT-20, 6Mbps

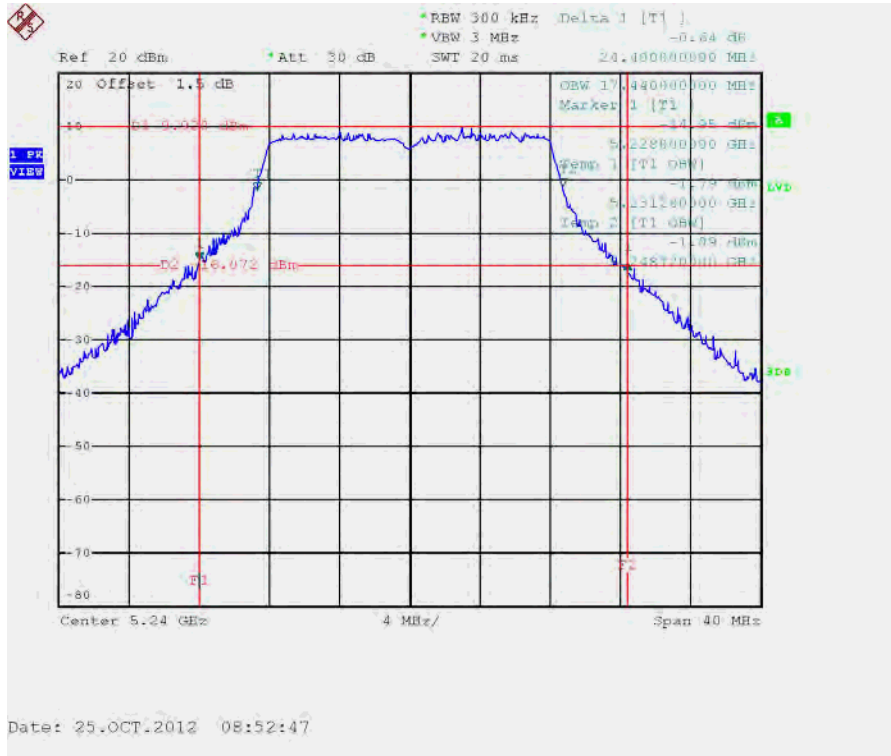


26 dB and 99% Bandwidth Plot on 5240 MHz, Non HT-20, Beam Forming, 6Mbps

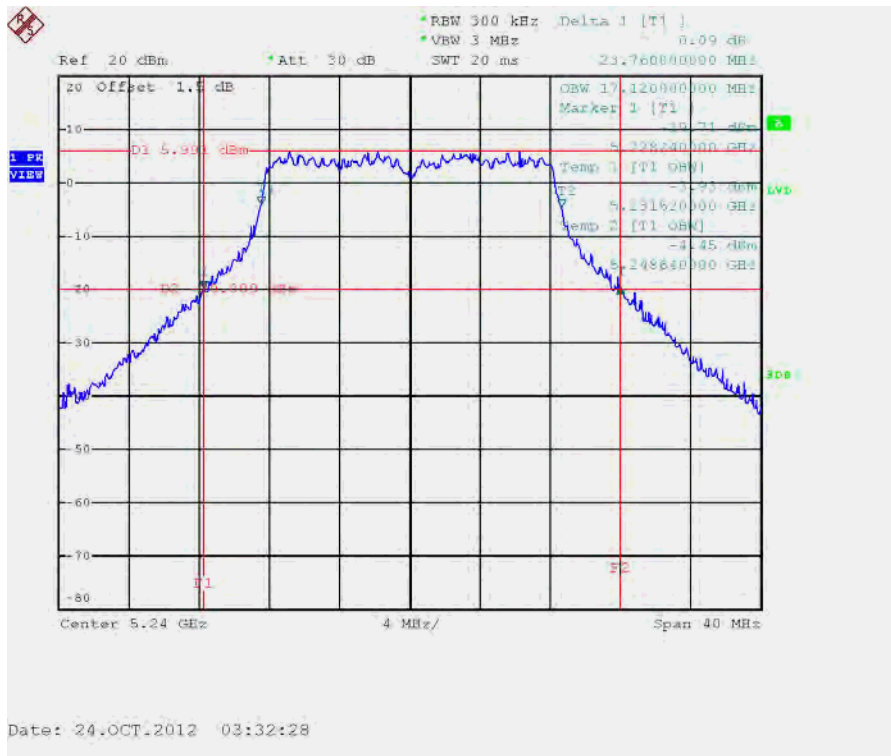




26 dB and 99% Bandwidth Plot on 5240 MHz, HT-20, M0

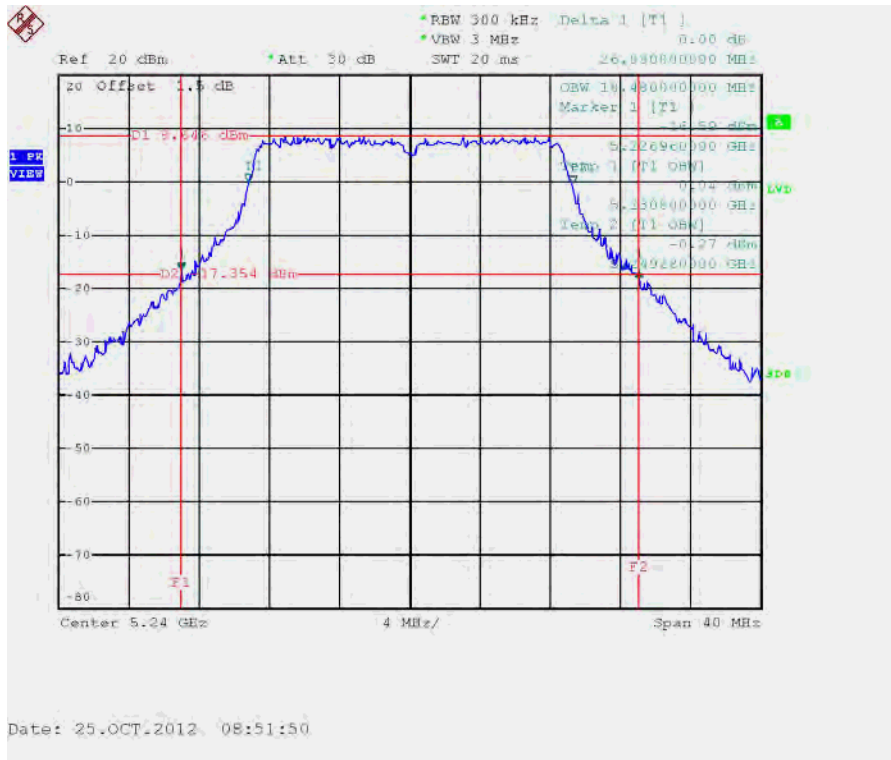


26 dB and 99% Bandwidth Plot on 5240 MHz, HT-20, Beam Forming, M0

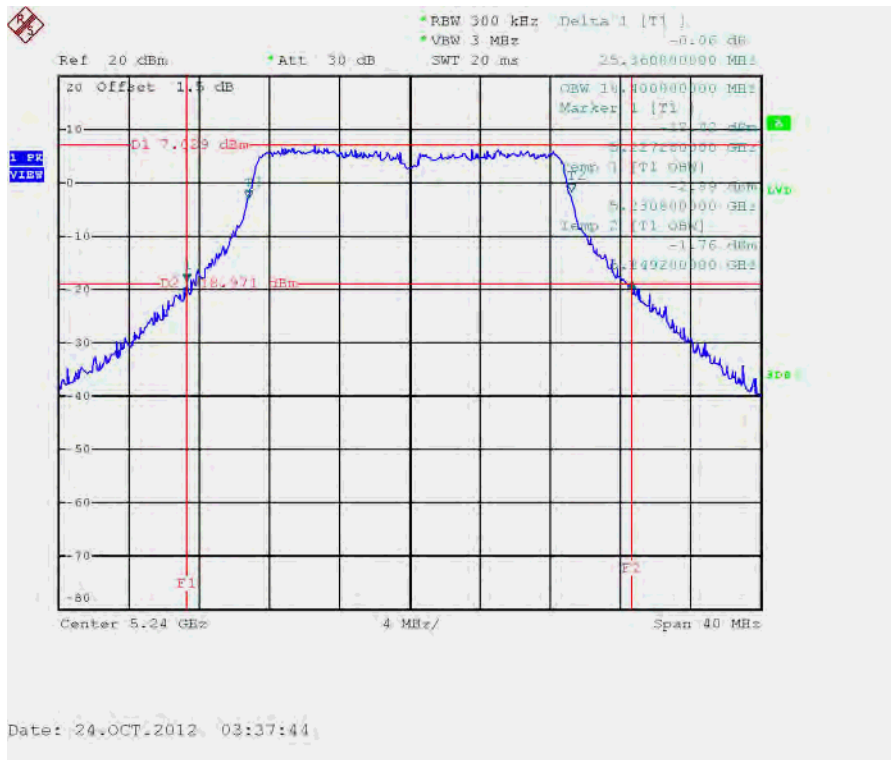




26 dB and 99% Bandwidth Plot on 5240 MHz, HT-20, Beam Forming, M8

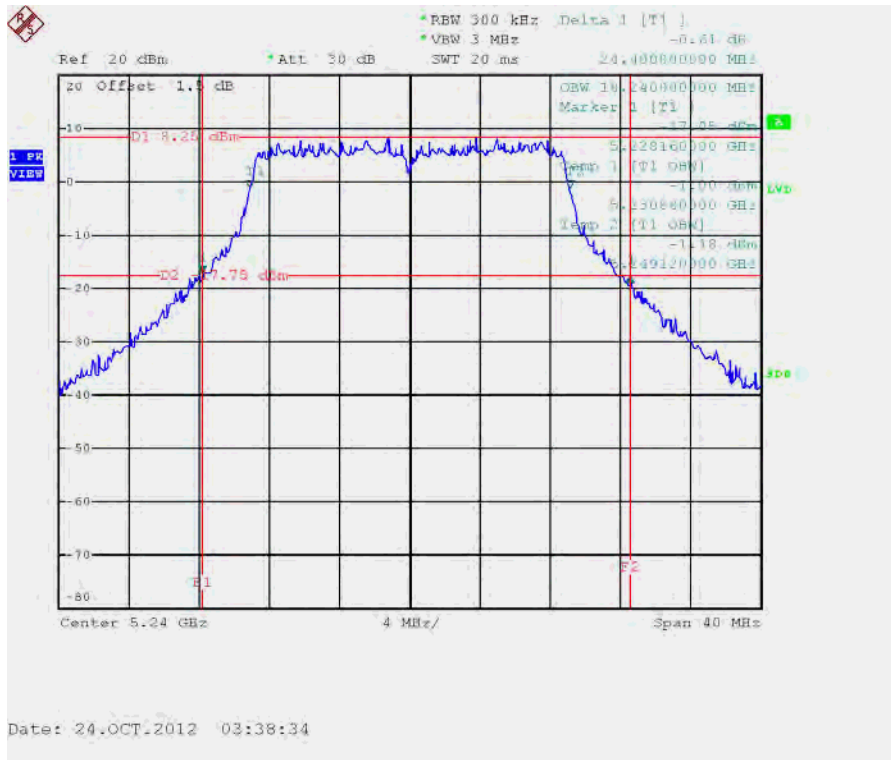


26 dB and 99% Bandwidth Plot on 5190 MHz, HT-40, M0

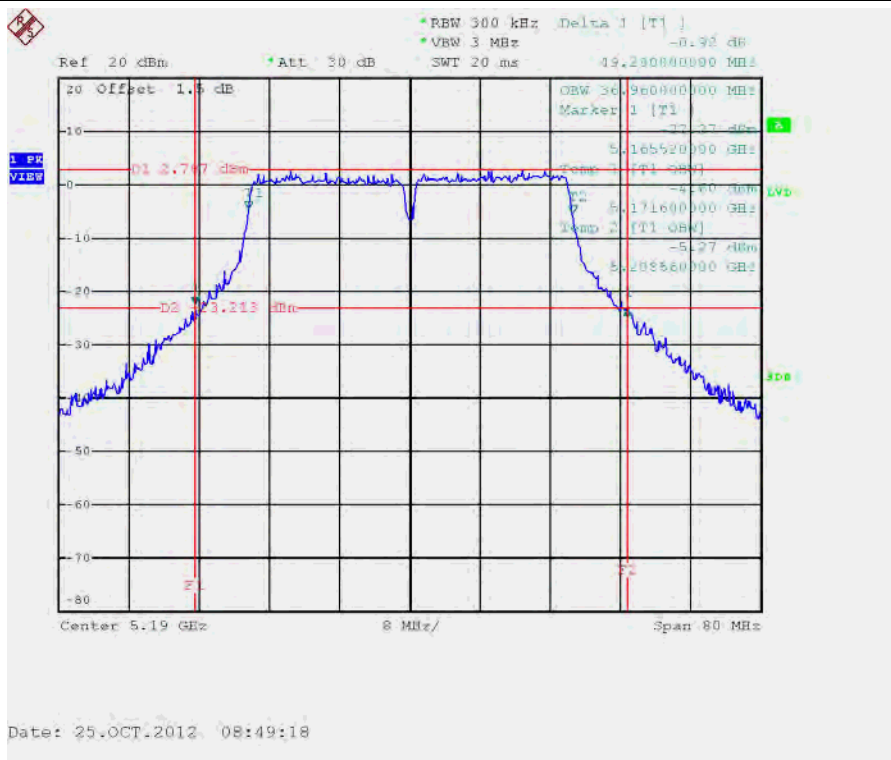


26 dB and 99% Bandwidth Plot on 5190 MHz, HT-40, Beam Forming, M0




26 dB and 99% Bandwidth Plot on 5190 MHz, HT-40, Beam Forming, M8

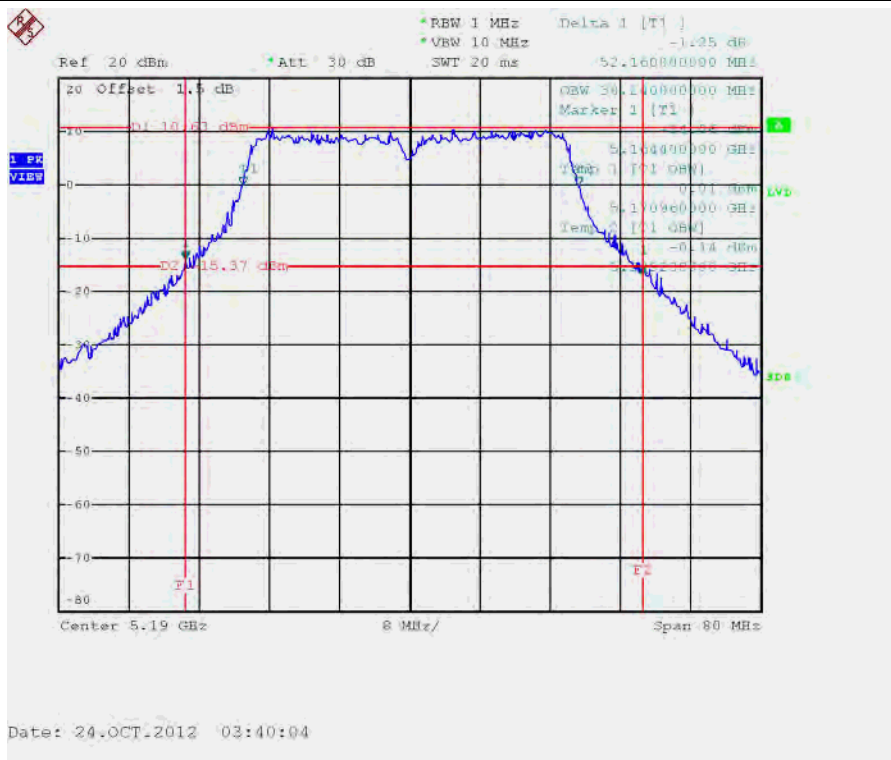

26 dB and 99% Bandwidth Plot on 5230 MHz, HT-40, M0

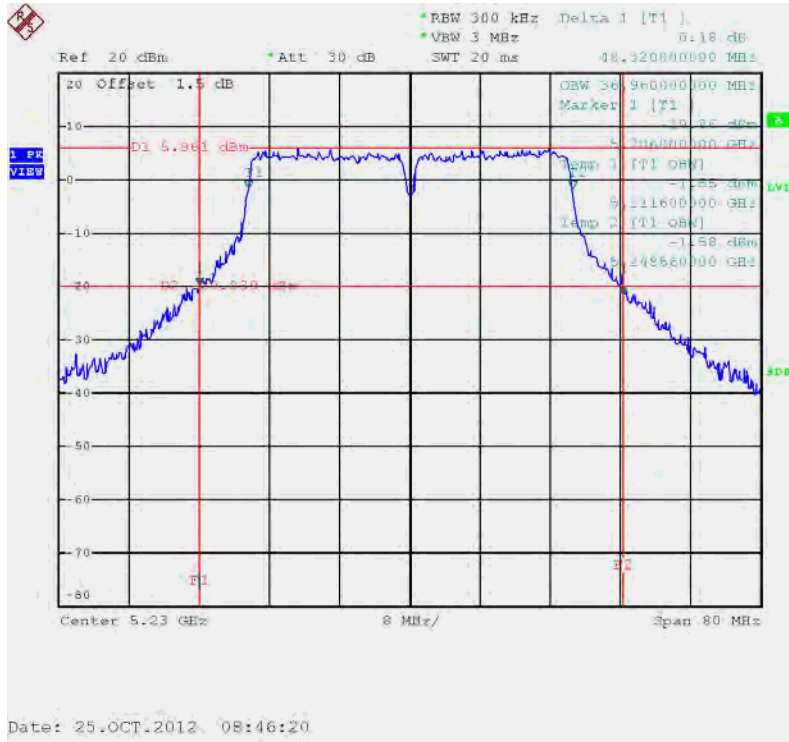


26 dB and 99% Bandwidth Plot on 5230 MHz, HT-40, Beam Forming, M0

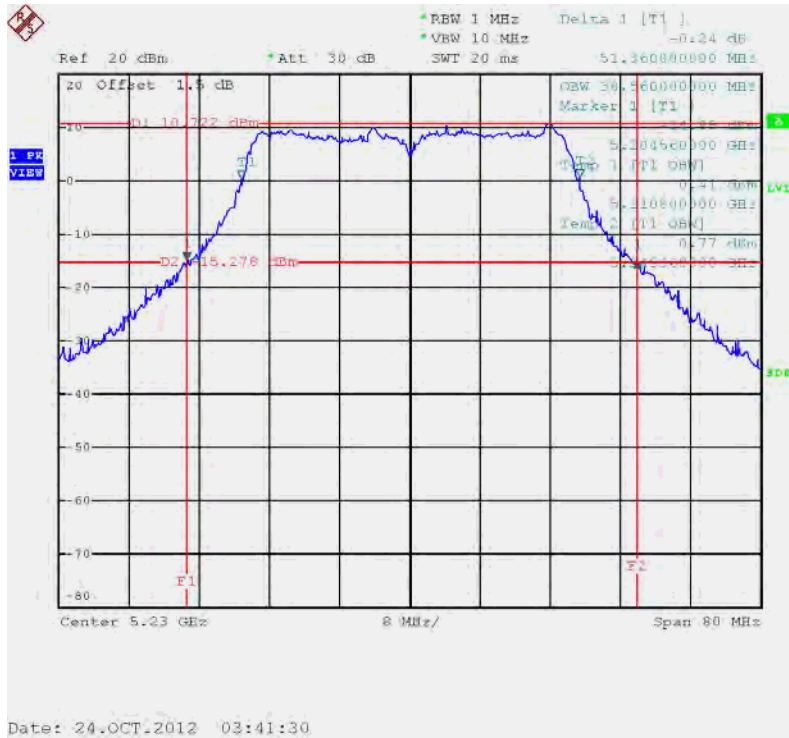



26 dB and 99% Bandwidth Plot on 5230 MHz, HT-40, Beam Forming, M8

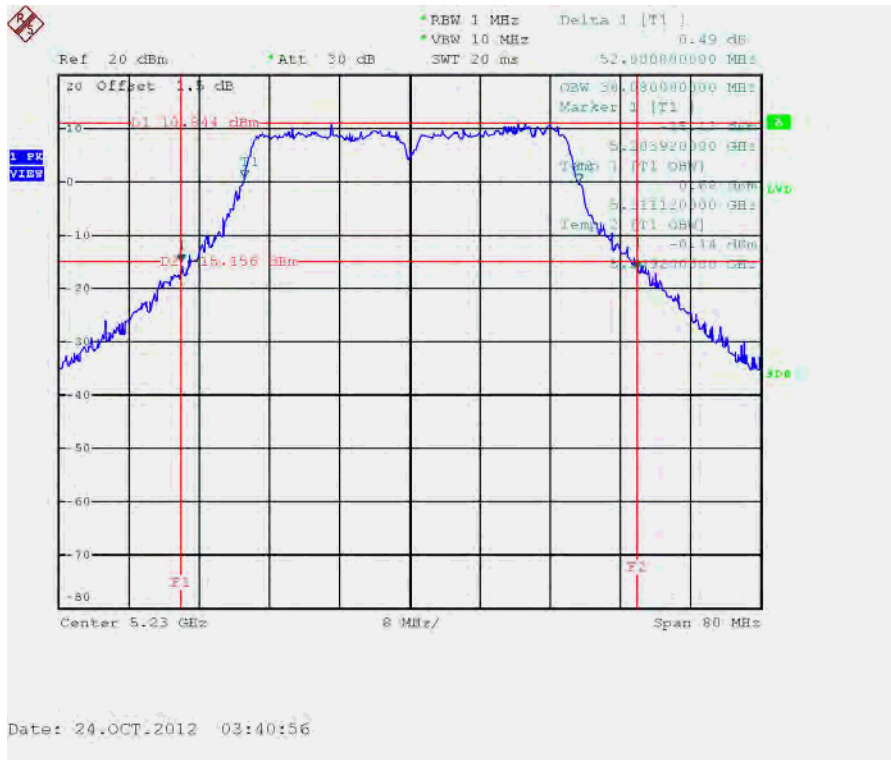

### 3.3 RF Output Power

#### 3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit
For the 5.15-5.25 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$ , then $P_{Out} = 17 - (G_{TX} - 6)$ .
$P_{Out}$ = maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle $\geq 98\%$ or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method PM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.

#### 3.3.4 Test Setup

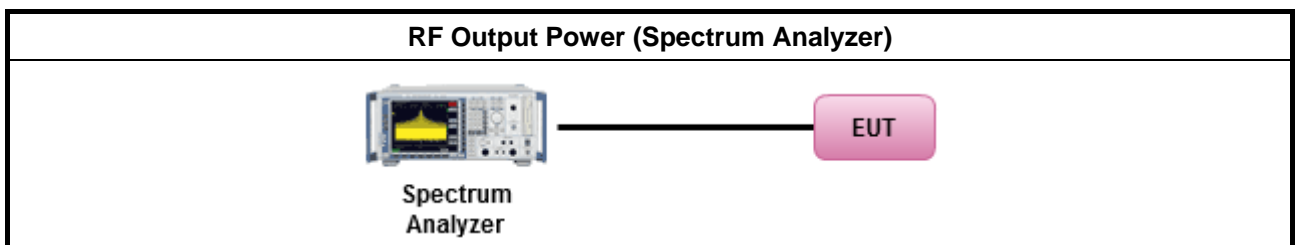



3.3.5 Test Result of Maximum Conducted Output Power


Freq. (MHz)	Operating Mode	N <sub>TX</sub>	Correlated Antenna Gain (dBi)	Tx1 Output Power (dBm)	Tx2 Output Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	1	5.00	16.69	-	16.69	17.00	0.31
	Non HT-20, 6 to 54Mbps	2	5.00	10.69	9.83	13.29	17.00	3.71
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	10.69	9.83	13.29	14.99	1.70
	HT-20, M0 to M7	1	5.00	16.91	-	16.91	17.00	0.09
	HT-20, M0 to M15	2	5.00	11.21	10.61	13.93	17.00	3.07
	HT-20, STBC, M0 to M7	2	5.00	13.71	12.84	16.31	17.00	0.69
	HT-20, Beam Forming, M0 to M7	2	8.01	11.21	10.61	13.93	14.99	1.06
	HT-20, Beam Forming, M8 to M15	2	5.00	14.19	13.56	16.90	17.00	0.10
5200	Non HT-20, 6 to 54Mbps	1	5.00	16.57	-	16.57	17.00	0.43
	Non HT-20, 6 to 54Mbps	2	5.00	10.83	9.83	13.37	17.00	3.63
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	10.83	9.83	13.37	14.99	1.62
	HT-20, M0 to M7	1	5.00	16.73	-	16.73	17.00	0.27
	HT-20, M0 to M15	2	5.00	11.5	10.59	14.08	17.00	2.92
	HT-20, STBC, M0 to M7	2	5.00	13.46	12.63	16.08	17.00	0.92
	HT-20, Beam Forming, M0 to M7	2	8.01	11.5	10.59	14.08	14.99	0.91
	HT-20, Beam Forming, M8 to M15	2	5.00	14.25	13.52	16.91	17.00	0.09
5240	Non HT-20, 6 to 54Mbps	1	5.00	16.63	-	16.63	17.00	0.37
	Non HT-20, 6 to 54Mbps	2	5.00	11.19	10.18	13.72	17.00	3.28
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	11.19	10.18	13.72	14.99	1.27
	HT-20, M0 to M7	1	5.00	16.54	-	16.54	17.00	0.46
	HT-20, M0 to M15	2	5.00	11.33	10.39	13.90	17.00	3.10
	HT-20, STBC, M0 to M7	2	5.00	13.29	12.57	15.96	17.00	1.04
	HT-20, Beam Forming, M0 to M7	2	8.01	11.33	10.39	13.90	14.99	1.09
	HT-20, Beam Forming, M8 to M15	2	5.00	14.24	13.47	16.88	17.00	0.12
5190	HT-40, M0 to M7	1	5.00	13.13	-	13.13	17.00	3.87
	HT-40, M0 to M15	2	5.00	10.45	9.61	13.06	17.00	3.94
	HT-40, STBC, M0 to M7	2	5.00	14.34	13.54	16.97	17.00	0.03
	HT-40, Beam Forming, M0 to M7	2	8.01	10.45	9.61	13.06	14.99	1.93
	HT-40, Beam Forming, M8 to M15	2	5.00	14.29	13.59	16.96	17.00	0.04
5230	HT-40, M0 to M7	1	5.00	16.68	-	16.68	17.00	0.32
	HT-40, M0 to M15	2	5.00	10.41	9.63	13.05	17.00	3.95
	HT-40, STBC, M0 to M7	2	5.00	14.26	13.59	16.95	17.00	0.05
	HT-40, Beam Forming, M0 to M7	2	8.01	10.41	9.63	13.05	14.99	1.94
	HT-40, Beam Forming, M8 to M15	2	5.00	14.09	13.5	16.82	17.00	0.18





Maximum Conducted Output Power Plot on 5180 MHz, Non HT-20, 6Mbps

Tx1

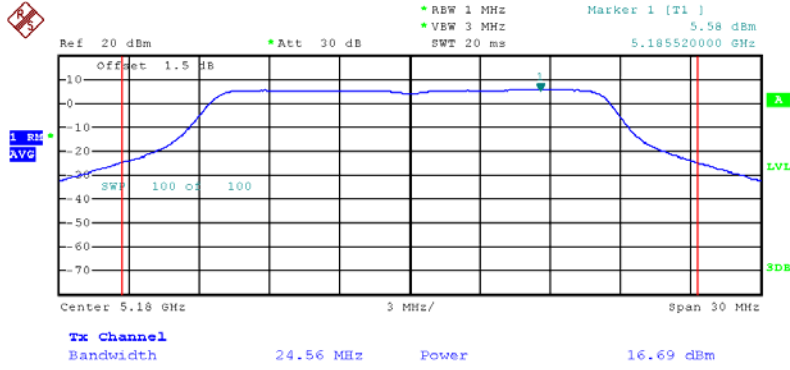


Date: 25.OCT.2012 09:00:39




Maximum Conducted Output Power Plot on 5180 MHz, Non HT-20/Non HT-20, Beam Forming, 6Mbps

Tx1

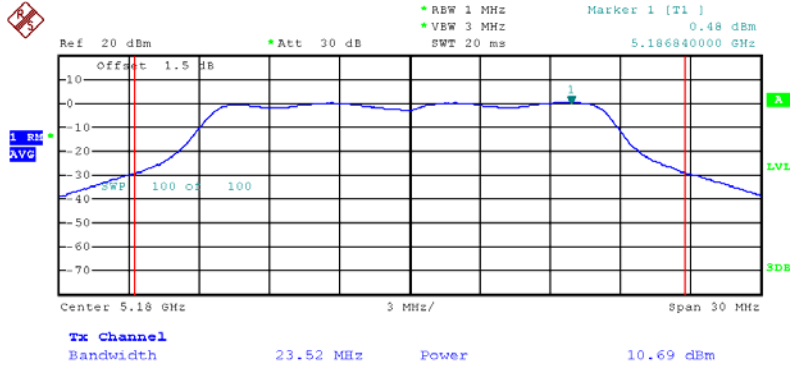

Date: 25.OCT.2012 14:00:49

Tx2

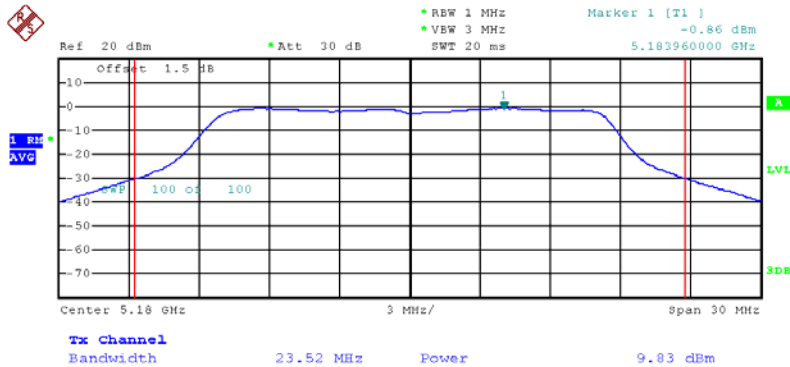


Date: 25.OCT.2012 14:01:10



Maximum Conducted Output Power Plot on 5180 MHz, HT-20, M0

Tx1

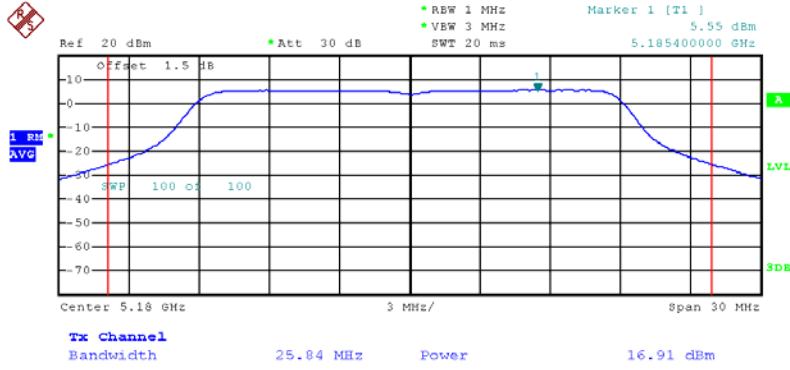


Date: 25.OCT.2012 09:27:48




Maximum Conducted Output Power Plot on 5180 MHz, HT-20 / HT-20, Beam Forming, M0

Tx1

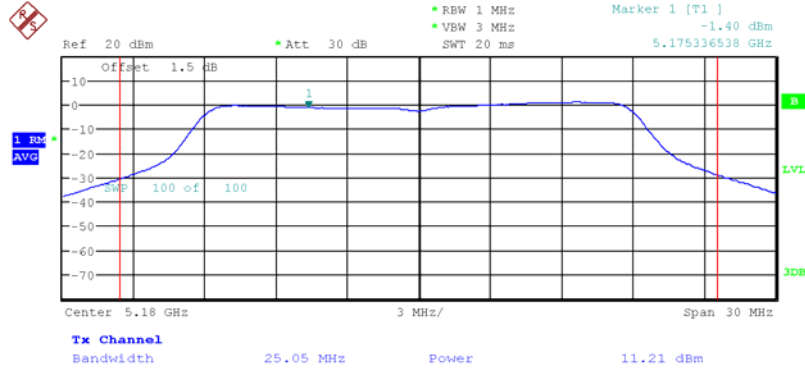

Date: 24.OCT.2012 23:45:06

Tx2

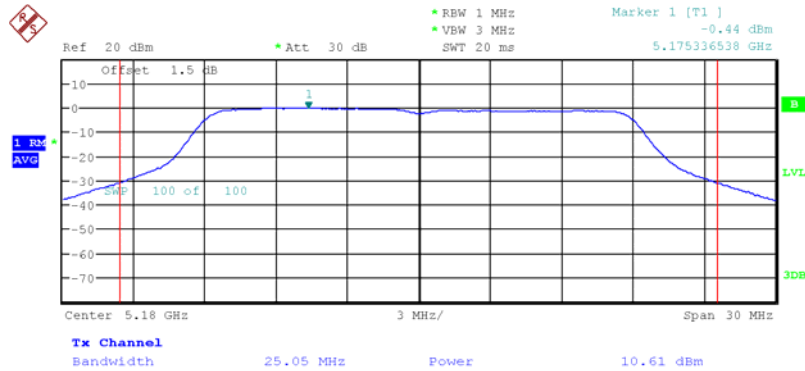


Date: 24.OCT.2012 23:44:16




Maximum Conducted Output Power Plot on 5180 MHz, HT-20, STBC, M0

Tx1

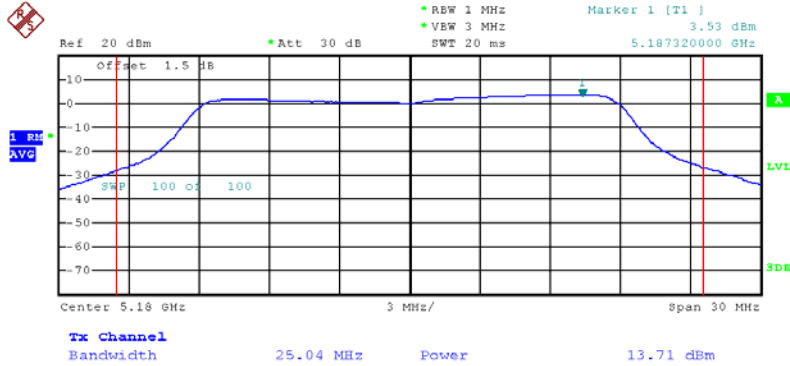

Date: 25.OCT.2012 14:27:19

Tx2

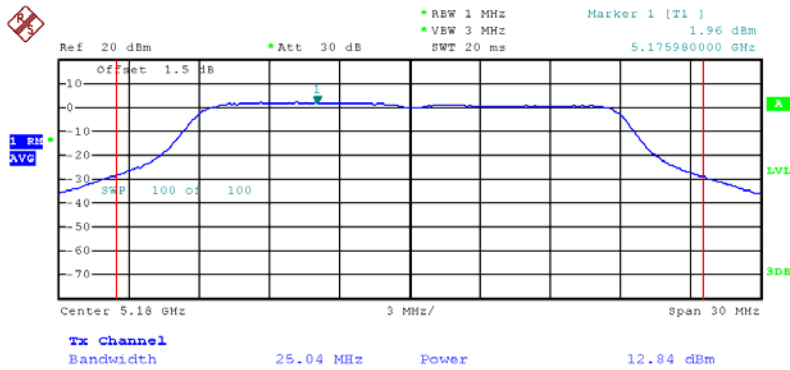


Date: 25.OCT.2012 14:26:51




Maximum Conducted Output Power Plot on 5180 MHz, HT-20, Beam Forming, M8

Tx1

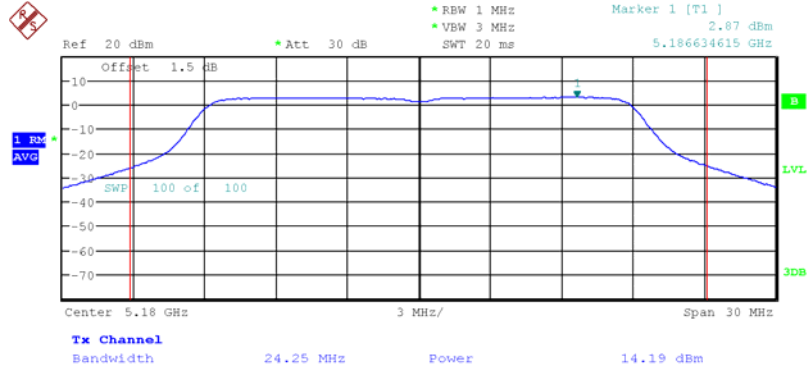

Date: 24.OCT.2012 23:51:33

Tx2

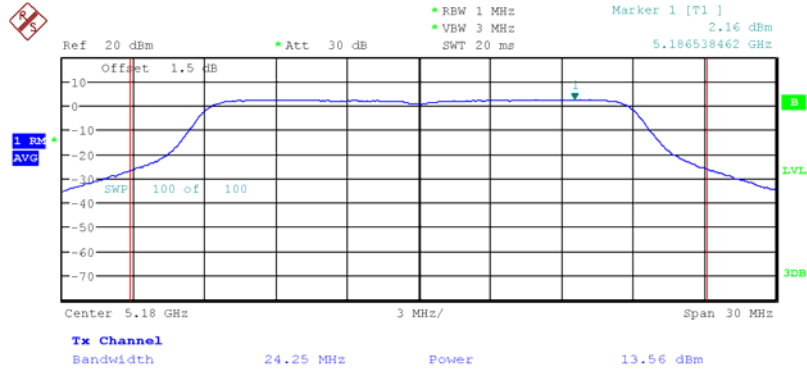


Date: 24.OCT.2012 23:50:25



Maximum Conducted Output Power Plot on 5200 MHz, Non HT-20, 6Mbps

Tx1

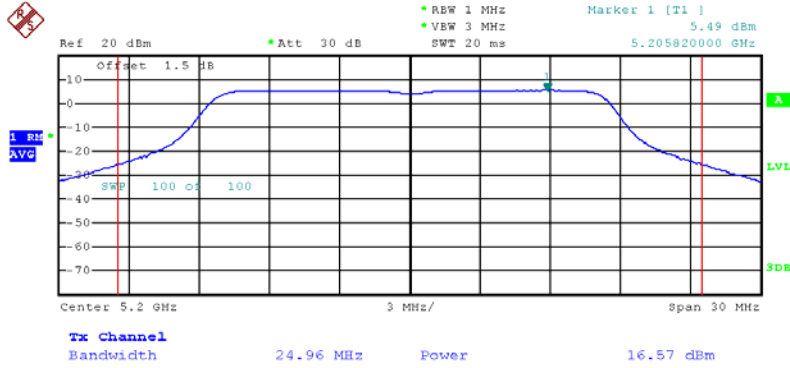


Date: 25.OCT.2012 09:22:10




Maximum Conducted Output Power Plot on 5200 MHz, Non HT-20/ Non HT-20, Beam Forming, 6Mbps

Tx1

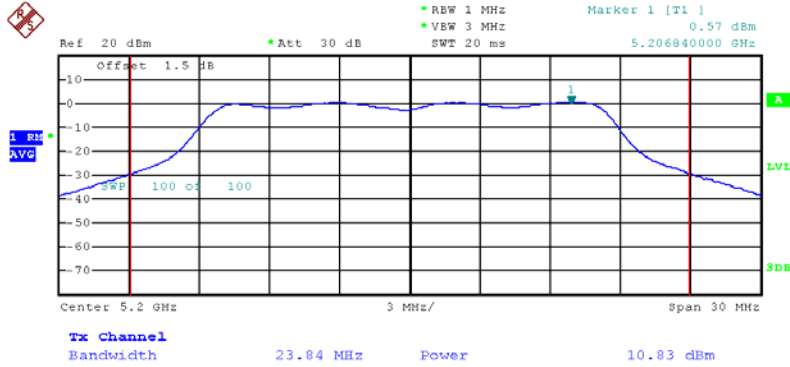

Date: 25.OCT.2012 14:02:11

Tx2

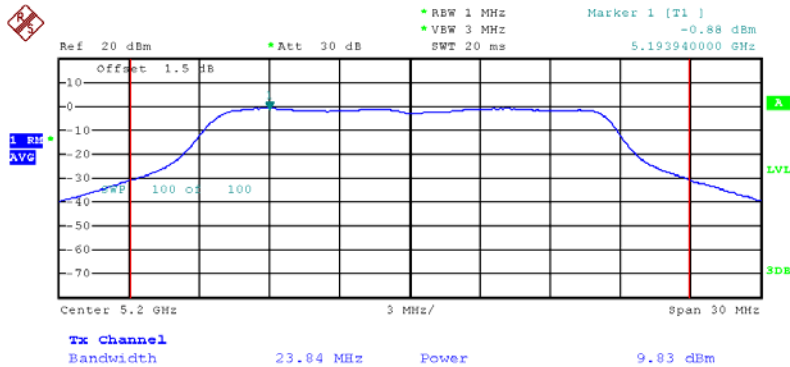


Date: 25.OCT.2012 14:01:54





Maximum Conducted Output Power Plot on 5200 MHz, HT-20, M0

Tx1

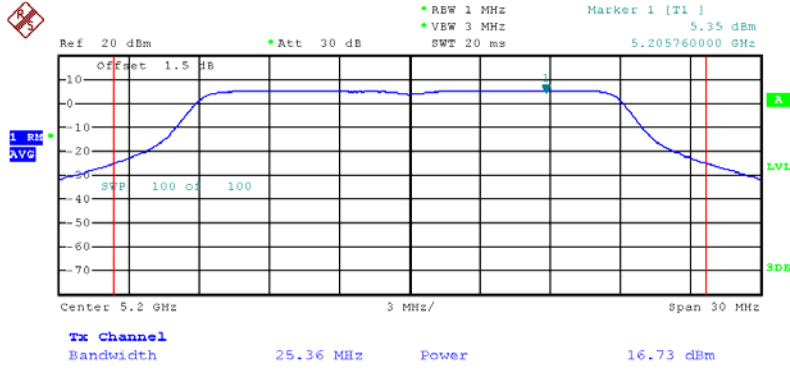


Date: 25.OCT.2012 09:26:38




Maximum Conducted Output Power Plot on 5200 MHz, HT-20 / HT-20, Beam Forming, M0

Tx1

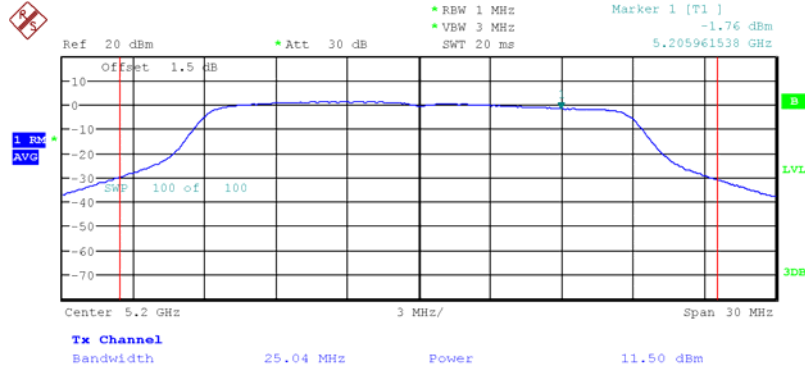

Date: 25.OCT.2012 00:08:46

Tx2

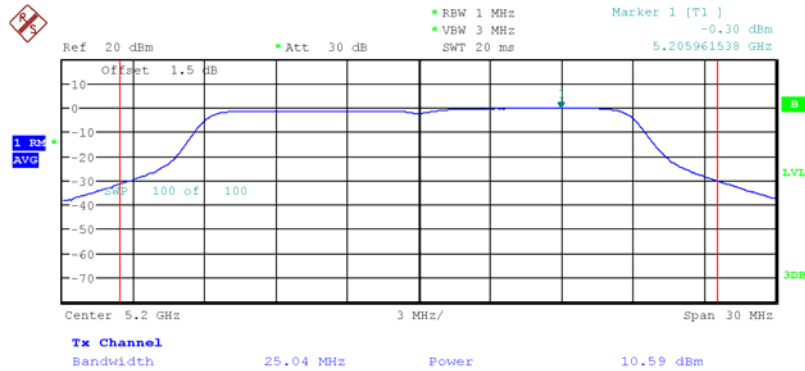


Date: 25.OCT.2012 00:07:52




Maximum Conducted Output Power Plot on 5200 MHz, HT-20, STBC, M0

Tx1

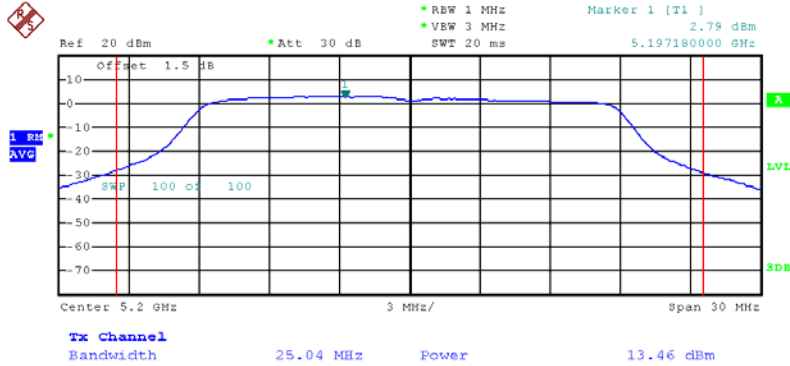

Date: 25.OCT.2012 14:25:47

Tx2

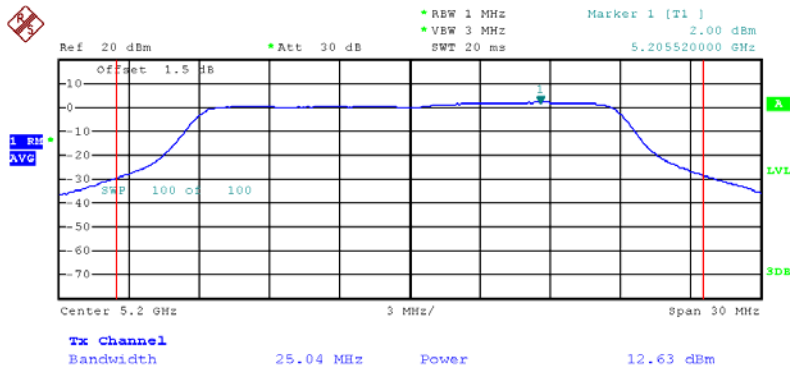


Date: 25.OCT.2012 14:26:12




Maximum Conducted Output Power Plot on 5200 MHz, HT-20, Beam Forming, M8

Tx1

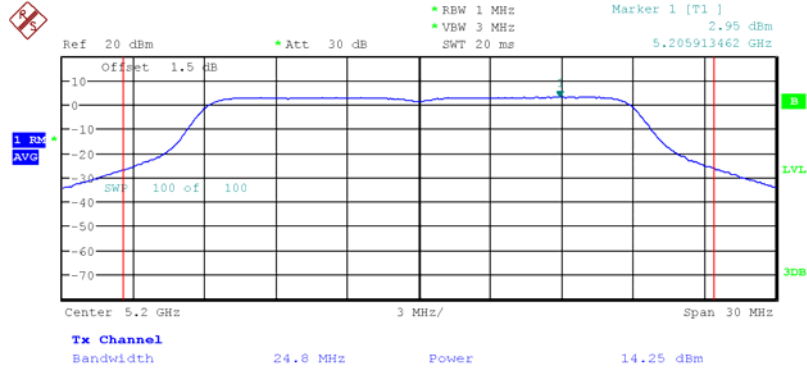

Date: 25.OCT.2012 00:11:06

Tx2

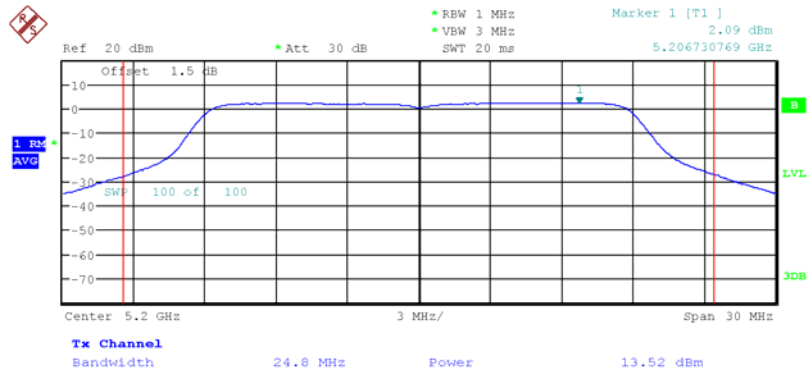


Date: 25.OCT.2012 00:12:09



Maximum Conducted Output Power Plot on 5240 MHz, Non HT-20, 6Mbps

Tx1

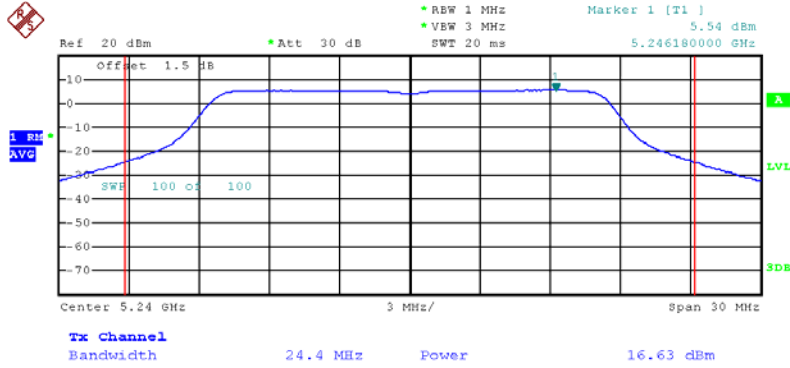


Date: 25.OCT.2012 09:23:47




Maximum Conducted Output Power Plot on 5240 MHz, Non HT-20/Non HT-20, Beam Forming, 6Mbps

Tx1

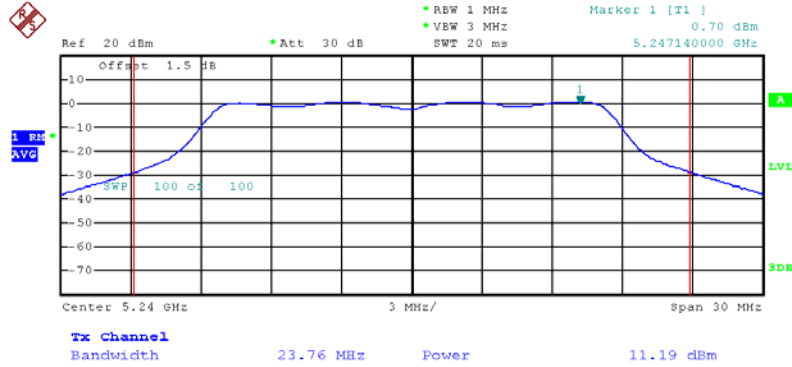

Date: 25.OCT.2012 14:07:24

Tx2

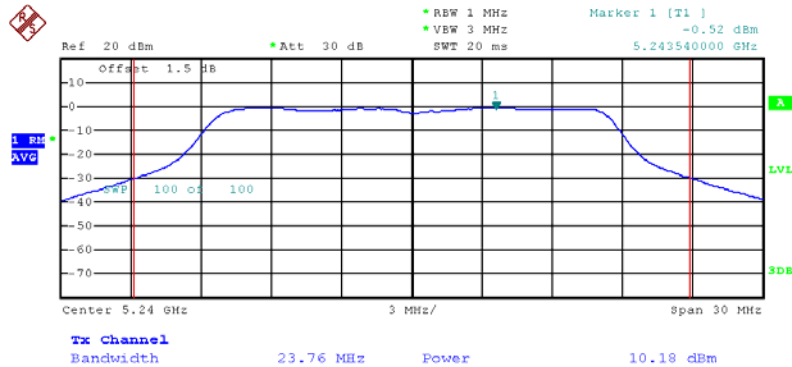


Date: 25.OCT.2012 14:07:50



Maximum Conducted Output Power Plot on 5240 MHz, HT-20, M0

Tx1

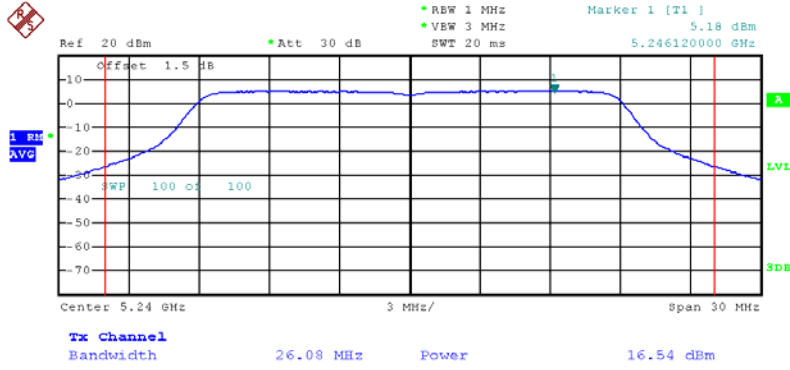


Date: 25.OCT.2012 09:25:08




Maximum Conducted Output Power Plot on 5240 MHz, HT-20 / HT-20, Beam Forming, M0

Tx1

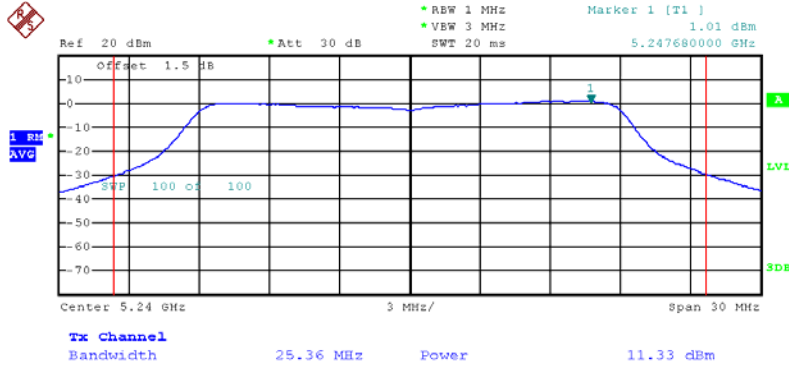

Date: 25.OCT.2012 14:09:04

Tx2

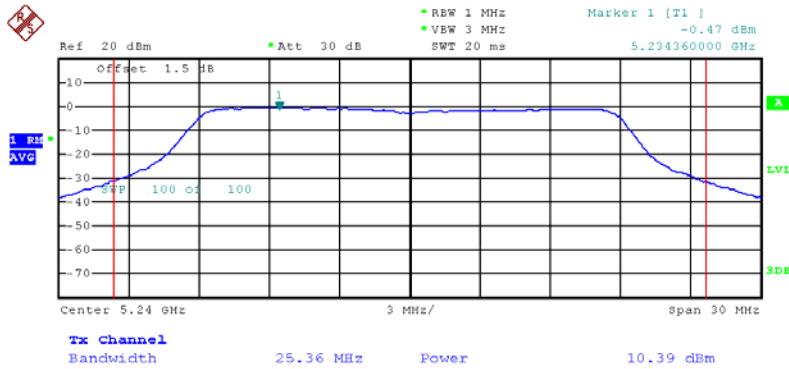


Date: 25.OCT.2012 14:08:36






Maximum Conducted Output Power Plot on 5240 MHz, HT-20, STBC, M0

Tx1

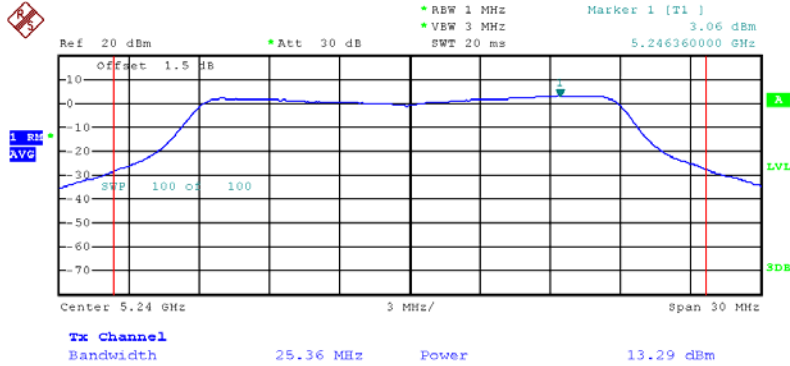

Date: 25.OCT.2012 14:09:43

Tx2

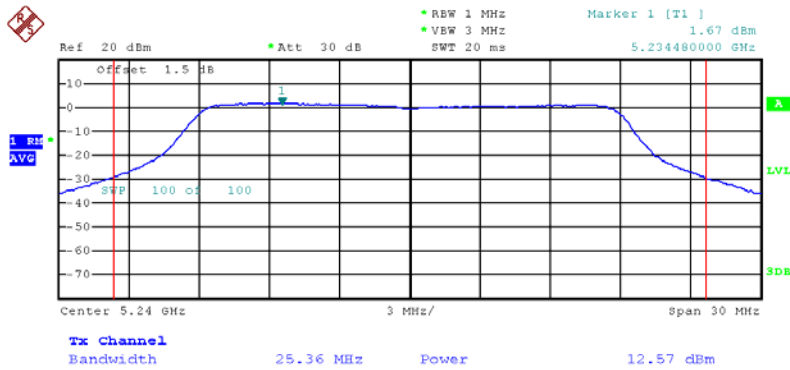


Date: 25.OCT.2012 14:10:01




Maximum Conducted Output Power Plot on 5240 MHz, HT-20, Beam Forming, M8

Tx1

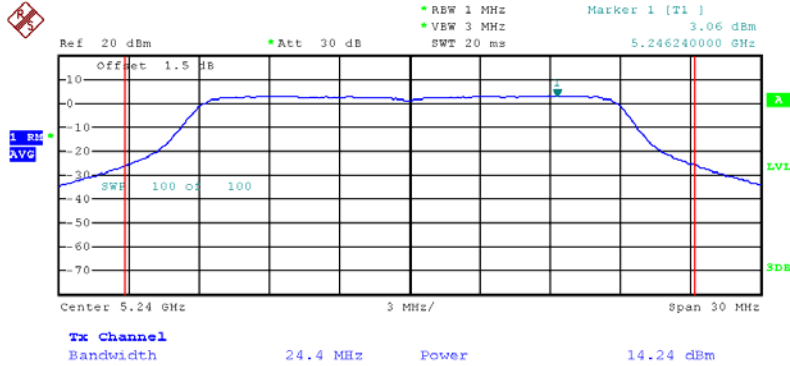

Date: 25.OCT.2012 14:24:32

Tx2

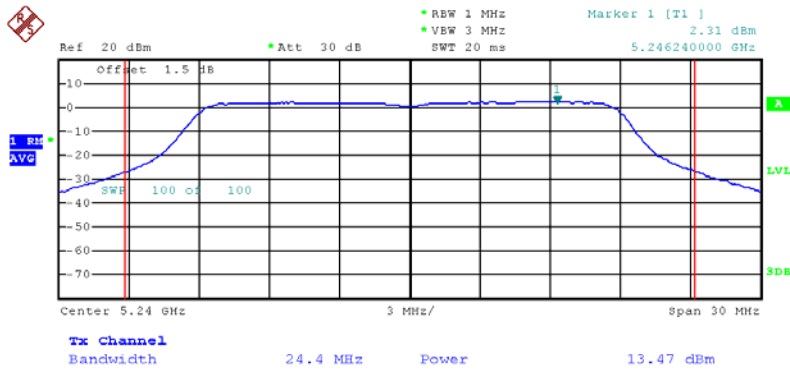


Date: 25.OCT.2012 14:23:59



Maximum Conducted Output Power Plot on 5190 MHz, HT-40, M0

Tx1

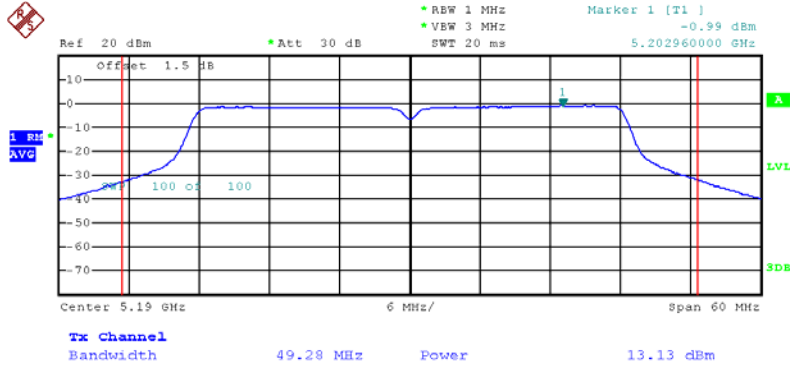


Date: 25.OCT.2012 09:29:42




Maximum Conducted Output Power Plot on 5190 MHz, HT-40 / HT-40, Beam Forming, M0

Tx1

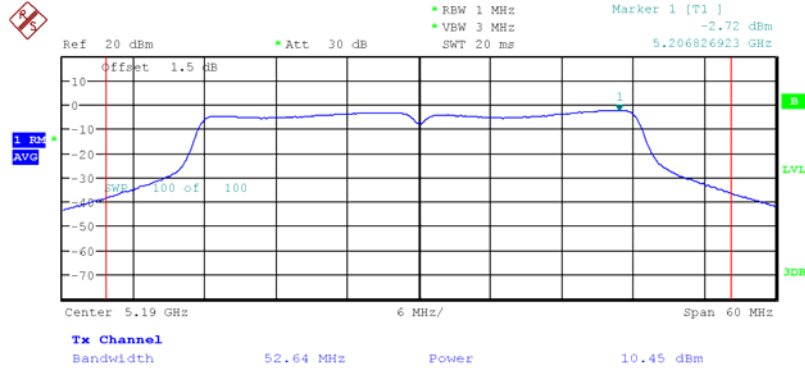

Date: 25.OCT.2012 00:37:05

Tx2

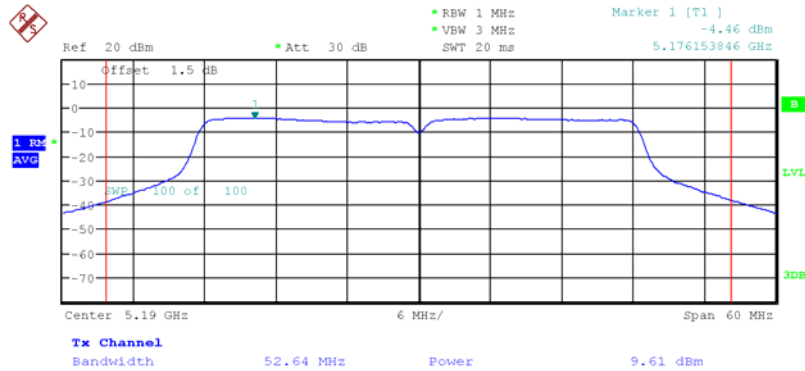


Date: 25.OCT.2012 00:36:44




Maximum Conducted Output Power Plot on 5190 MHz, HT-40, STBC, M0

Tx1

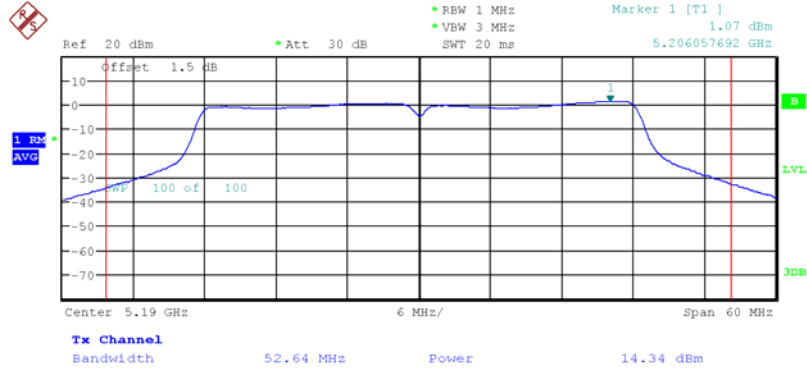

Date: 25.OCT.2012 00:37:39

Tx2

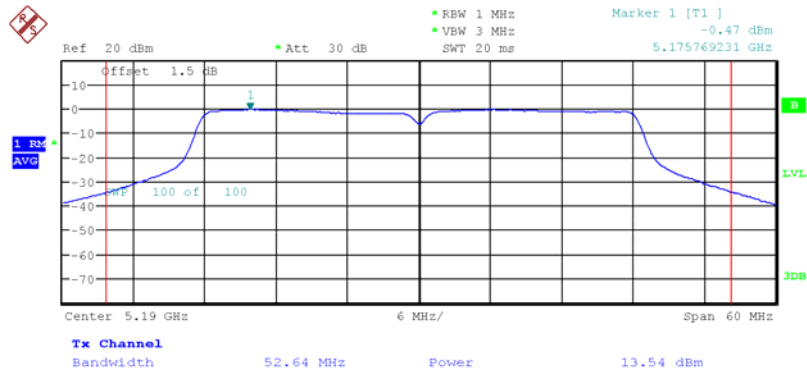


Date: 25.OCT.2012 00:38:02




Maximum Conducted Output Power Plot on 5190 MHz, HT-40, Beam Forming, M8

Tx1

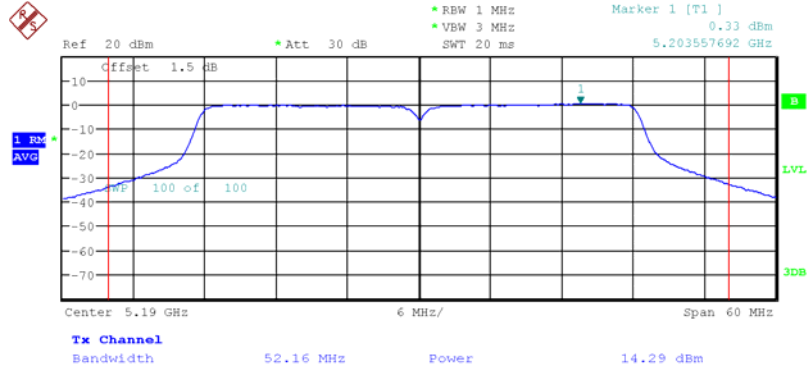

Date: 25.OCT.2012 00:33:22

Tx2

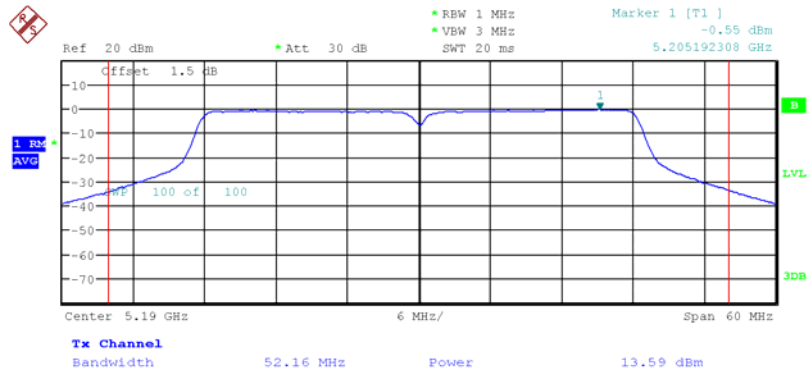


Date: 25.OCT.2012 00:34:17



Maximum Conducted Output Power Plot on 5230 MHz, HT-40, M0

Tx1

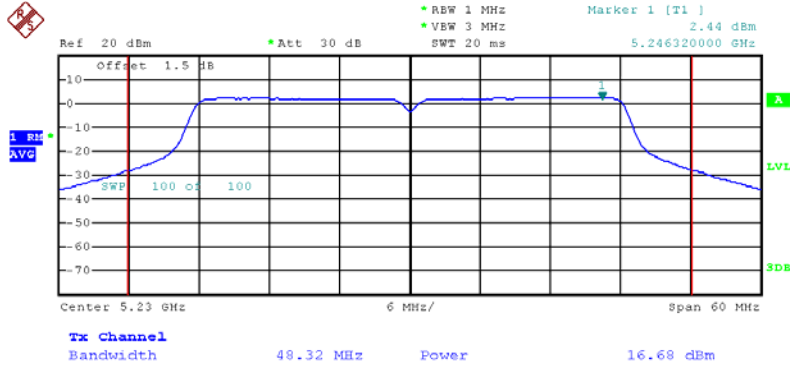


Date: 25.OCT.2012 09:30:51




Maximum Conducted Output Power Plot on 5230 MHz, HT-40 / HT-40, Beam Forming, M0

Tx1

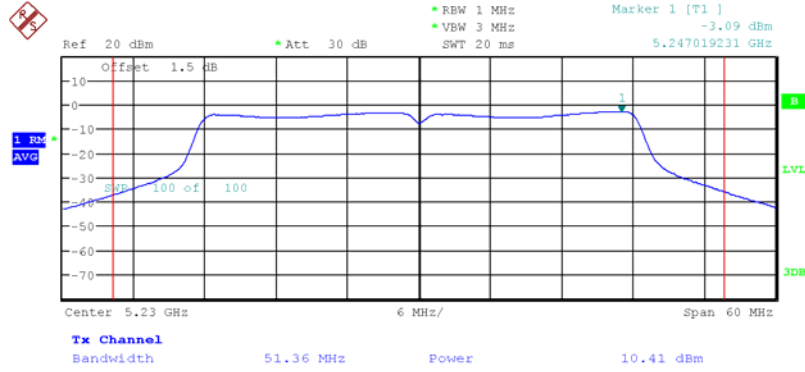

Date: 25.OCT.2012 00:43:04

Tx2

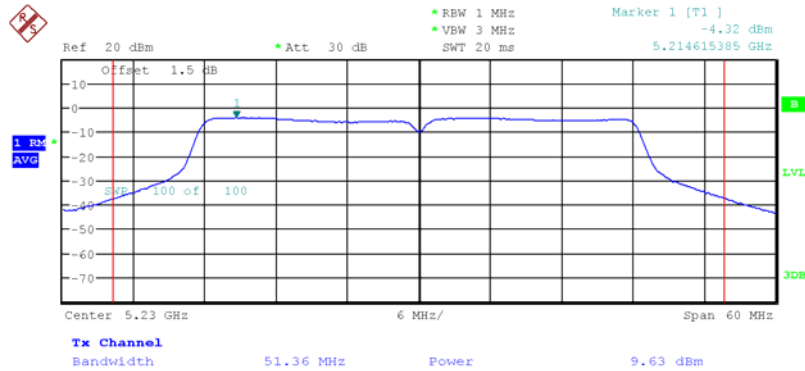


Date: 25.OCT.2012 00:42:26






Maximum Conducted Output Power Plot on 5230 MHz, HT-40, STBC, M0

Tx1

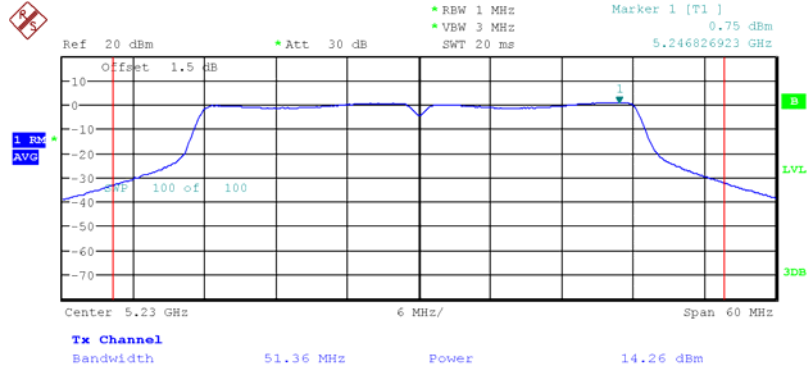

Date: 25.OCT.2012 00:40:55

Tx2

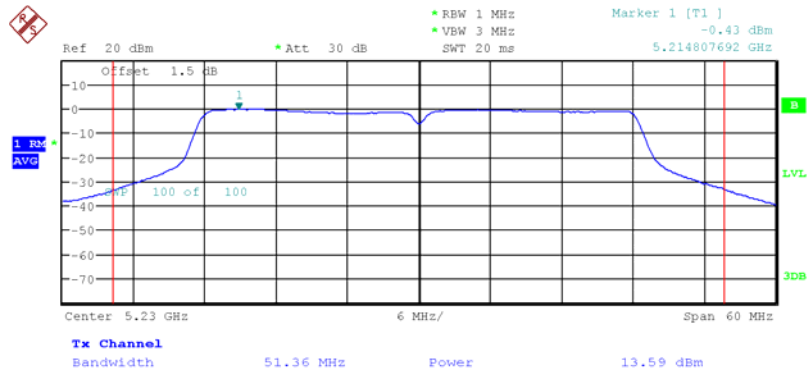


Date: 25.OCT.2012 00:39:39




Maximum Conducted Output Power Plot on 5230 MHz, HT-40, Beam Forming, M8

Tx1

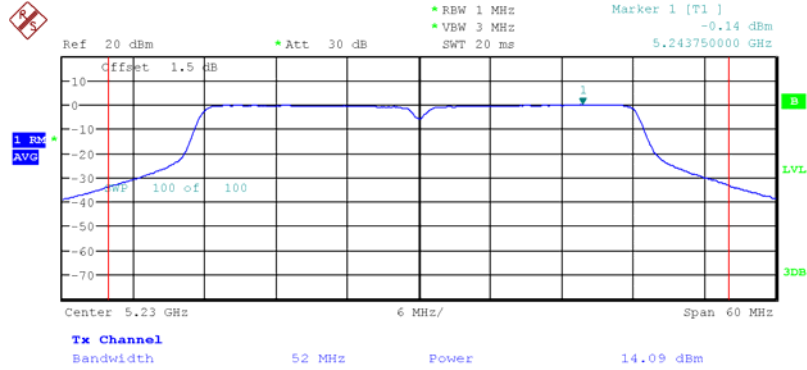

Date: 25.OCT.2012 00:47:22

Tx2

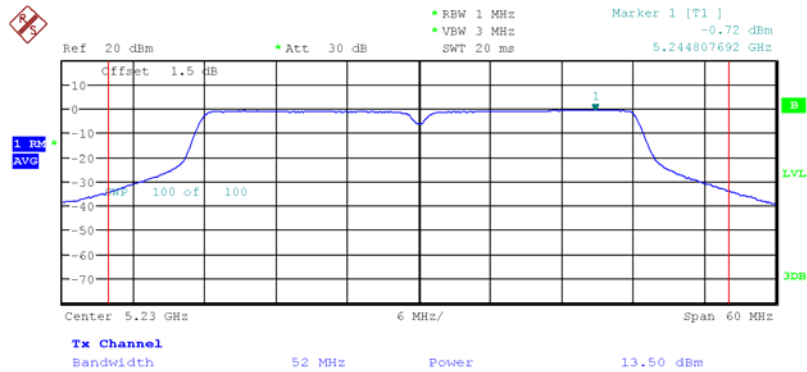

Date: 25.OCT.2012 00:45:28

### 3.4 Peak Power Spectral Density

#### 3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit
For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) $\leq 4$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 4 - (G_{TX} - 6)$ .
<b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz <b>G<sub>TX</sub></b> = the maximum transmitting antenna directional gain in dBi.


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as FCC KDB 789033, E)5) power spectral density can be measured using resolution bandwidths $< 1$ MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle $\geq 98\%$ or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 Alt. (RMS detection with slow sweep speed) duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$ . Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

#### 3.4.4 Test Setup

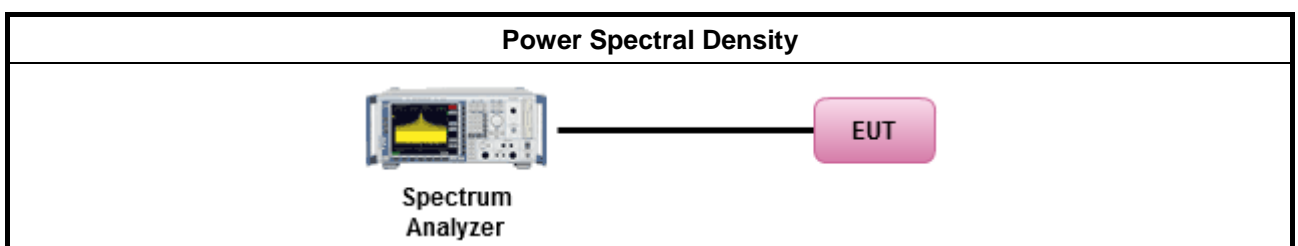


### 3.4.5 Test Result of Peak Power Spectral Density

Freq. (MHz)	Operating Mode	N <sub>Tx</sub>	Data Rate (Mbps)	Tx1 PSD Antenna (dBm/MHz)	Tx2 PSD Antenna (dBm/MHz)	1Port Limit (dBm/MHz)	1Port Margin (dB)	Total Tx PSD Antenna (dBm/MHz)	Total Port Limit (dBm/MHz)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	1	6	3.52	-	-	-	-	4.00	0.48
	Non HT-20, 6 to 54Mbps	2	6	-1.24	-2.67	-1.02	0.22	1.11	1.99	0.88
	Non HT-20, Beam Forming, 6 to 54Mbps	2	6	-1.24	-2.67	-1.02	0.22	1.11	1.99	0.88
	HT-20, M0 to M7	1	M0	3.41	-	-	-	-	4.00	0.59
	HT-20, M0 to M15	2	M0	-1.29	-2.16	-1.02	0.27	1.31	1.99	0.68
	HT-20, STBC, M0 to M7	2	M0	0.78	-0.25	0.99	0.21	3.31	4.00	0.69
	HT-20, Beam Forming, M0 to M7	2	M0	-1.29	-2.16	-1.02	0.27	1.31	1.99	0.68
	HT-20, Beam Forming, M8 to M15	2	M8	0.44	-0.48	0.99	0.55	3.01	4.00	0.99
5200	Non HT-20, 6 to 54Mbps	1	6	3.88	-	-	-	-	4.00	0.12
	Non HT-20, 6 to 54Mbps	2	6	-1.29	-2.82	-1.02	0.27	1.02	1.99	0.97
	Non HT-20, Beam Forming, 6 to 54Mbps	2	6	-1.29	-2.82	-1.02	0.27	1.02	1.99	0.97
	HT-20, M0 to M7	1	M0	3.19	-	-	-	-	4.00	0.81
	HT-20, M0 to M15	2	M0	-1.17	-2.63	-1.02	0.15	1.17	1.99	0.82
	HT-20, STBC, M0 to M7	2	M0	0.53	-0.27	0.99	0.46	3.16	4.00	0.84
	HT-20, Beam Forming, M0 to M7	2	M0	-1.17	-2.63	-1.02	0.15	1.17	1.99	0.82
	HT-20, Beam Forming, M8 to M15	2	M8	0.61	-0.58	0.99	0.38	3.07	4.00	0.93
5240	Non HT-20, 6 to 54Mbps	1	6	3.39	-	-	-	-	4.00	0.61
	Non HT-20, 6 to 54Mbps	2	6	-1.43	-2.53	-1.02	0.41	1.07	1.99	0.92
	Non HT-20, Beam Forming, 6 to 54Mbps	2	6	-1.43	-2.53	-1.02	0.41	1.07	1.99	0.92
	HT-20, M0 to M7	1	M0	2.9	-	-	-	-	4.00	1.10
	HT-20, M0 to M15	2	M0	-1.13	-2.24	-1.02	0.11	1.36	1.99	0.63
	HT-20, STBC, M0 to M7	2	M0	0.83	-0.4	0.99	0.16	3.27	4.00	0.73
	HT-20, Beam Forming, M0 to M7	2	M0	-1.13	-2.24	-1.02	0.11	1.36	1.99	0.63
	HT-20, Beam Forming, M8 to M15	2	M8	0.66	-0.26	0.99	0.33	3.23	4.00	0.77
5190	HT-40, M0 to M7	1	M0	-3.18	-	-	-	-	4.00	7.18
	HT-40, M0 to M15	2	M0	-4.83	-5.82	-1.02	3.81	-2.29	1.99	4.28
	HT-40, STBC, M0 to M7	2	M0	-0.93	-1.88	0.99	1.92	1.63	4.00	2.37
	HT-40, Beam Forming, M0 to M7	2	M0	-4.83	-5.82	-1.02	3.81	-2.29	1.99	4.28
	HT-40, Beam Forming, M8 to M15	2	M8	-1.71	-2.81	0.99	2.70	0.79	4.00	3.21
5230	HT-40, M0 to M7	1	M0	0.32	-	-	-	-	4.00	3.68
	HT-40, M0 to M15	2	M0	-4.48	-6.19	-1.02	3.46	-2.24	1.99	4.23
	HT-40, STBC, M0 to M7	2	M0	-0.51	-2.05	0.99	1.50	1.80	4.00	2.20
	HT-40, Beam Forming, M0 to M7	2	M0	-4.48	-6.19	-1.02	3.46	-2.24	1.99	4.23
	HT-40, Beam Forming, M8 to M15	2	M8	-1.34	-2.69	0.99	2.33	1.05	4.00	2.95



Peak Power Spectral Density Plot on 5180 MHz, Non HT-20, 6Mbps

Tx1

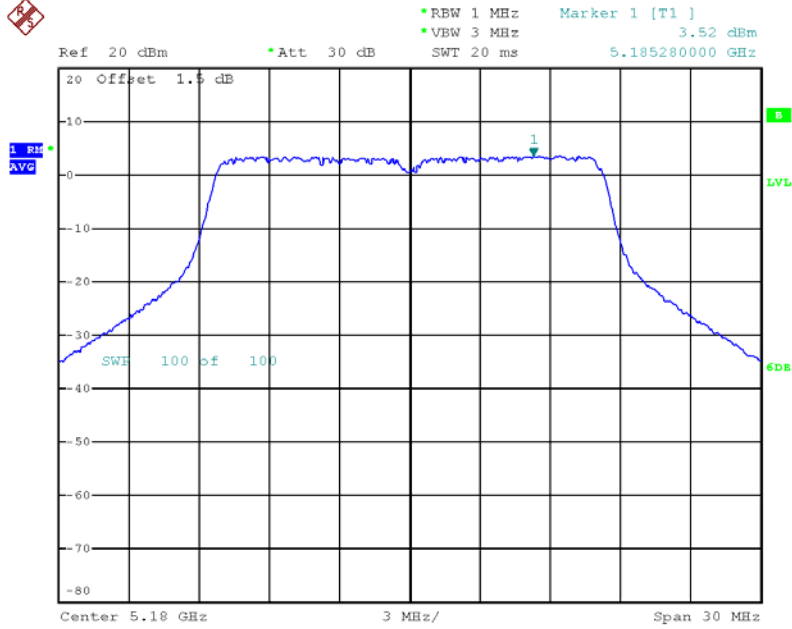


Date: 25.OCT.2012 09:18:35




Peak Power Spectral Density Plot on 5180 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

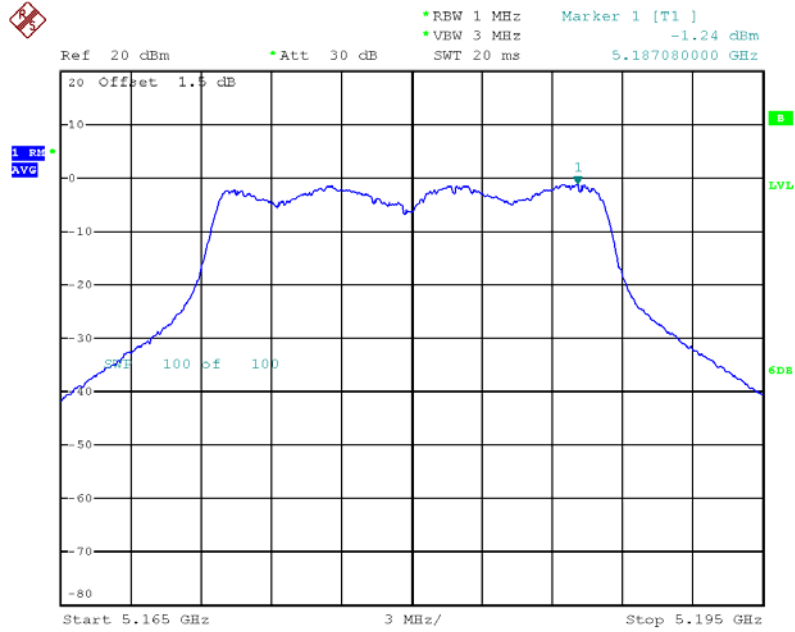

Date: 25.OCT.2012 12:02:22

Tx2

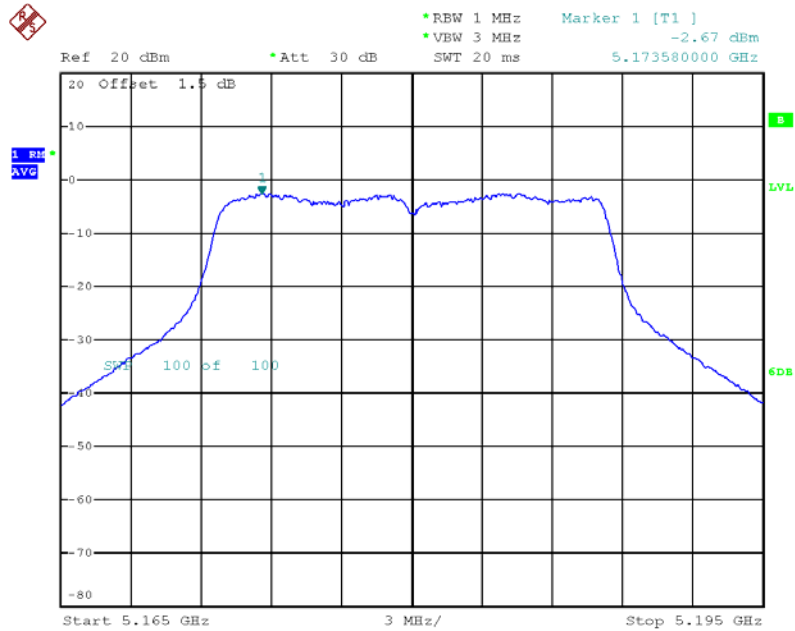


Date: 25.OCT.2012 12:02:05



Peak Power Spectral Density Plot on 5180 MHz, HT-20, M0

Tx1

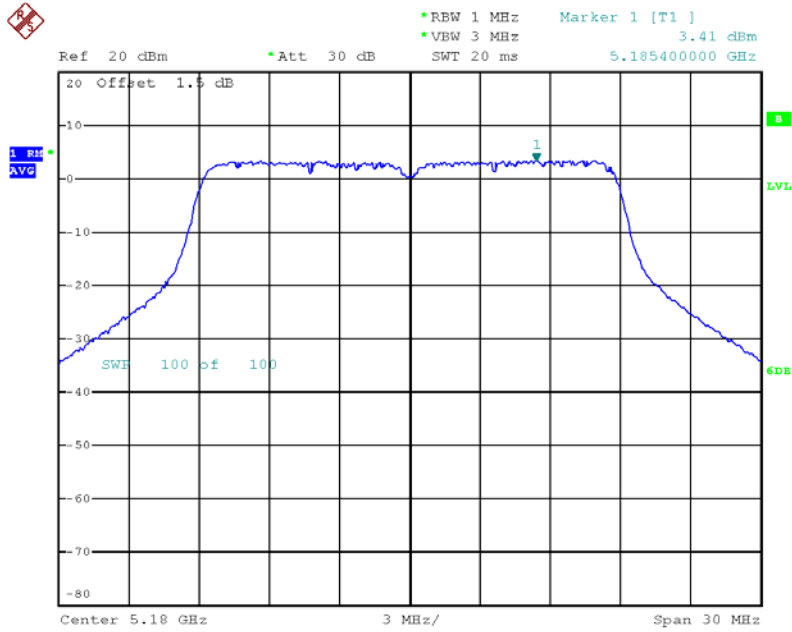


Date: 25.OCT.2012 09:28:06




Peak Power Spectral Density Plot on 5180 MHz, HT-20 / HT-20, Beam Forming, M0

Tx1

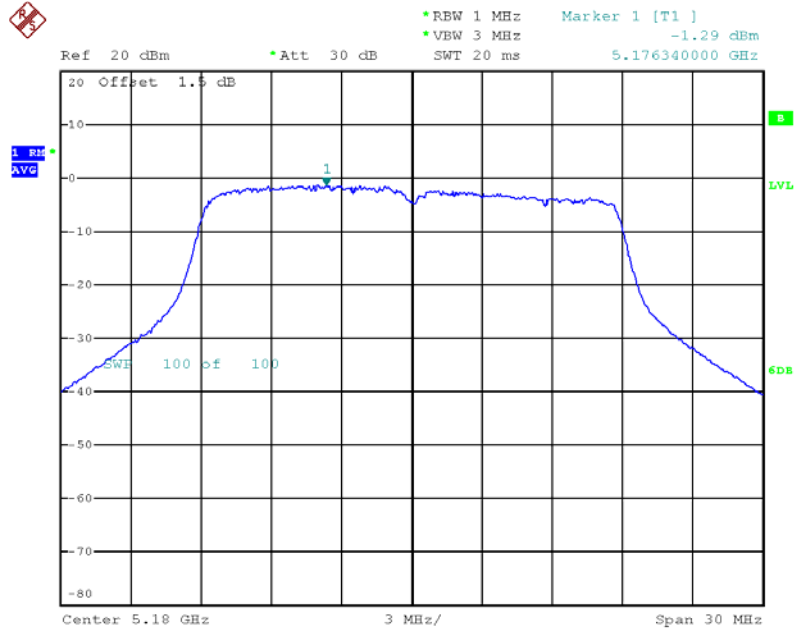

Date: 25.OCT.2012 12:55:30

Tx2

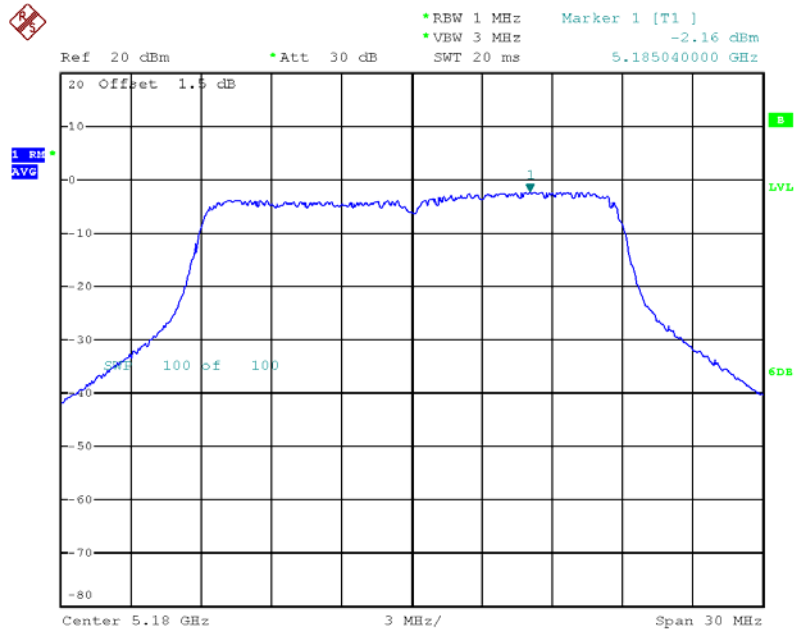


Date: 25.OCT.2012 12:55:51






Peak Power Spectral Density Plot on 5180 MHz, HT-20, STBC, M0

Tx1

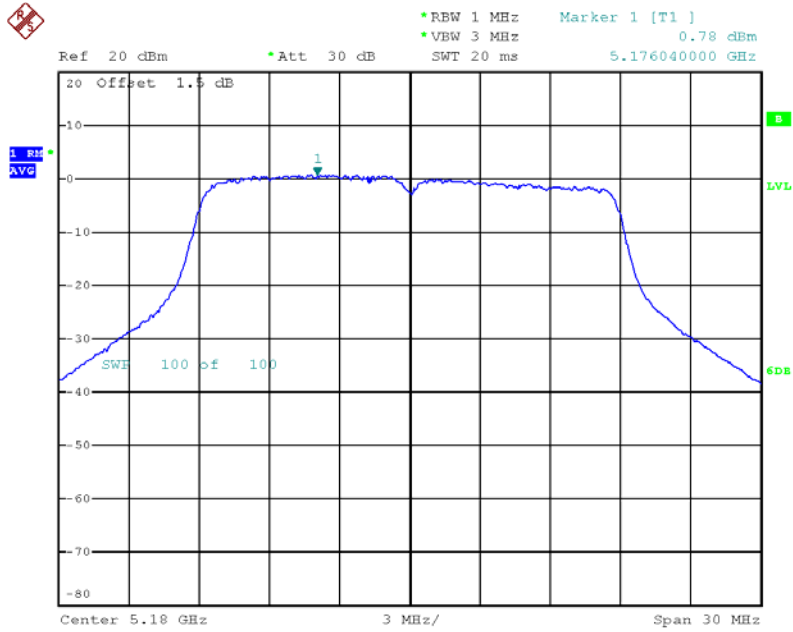

Date: 25.OCT.2012 12:34:15

Tx2

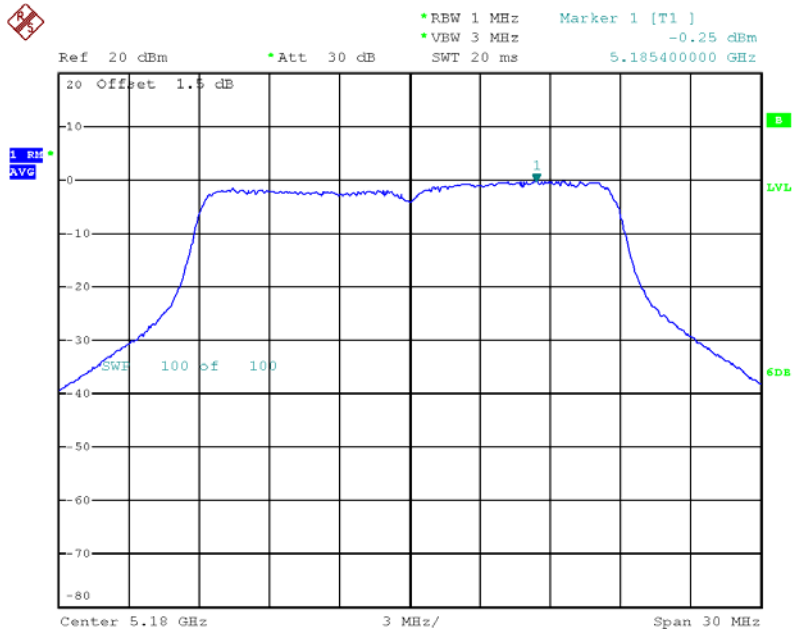


Date: 25.OCT.2012 12:35:22




Peak Power Spectral Density Plot on 5180 MHz, HT-20, Beam Forming, M8

Tx1

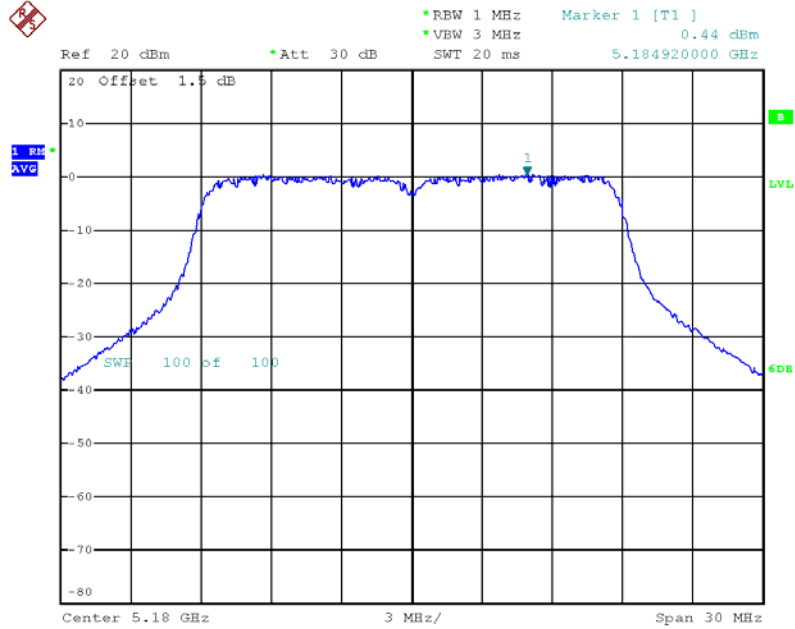

Date: 25.OCT.2012 12:40:02

Tx2

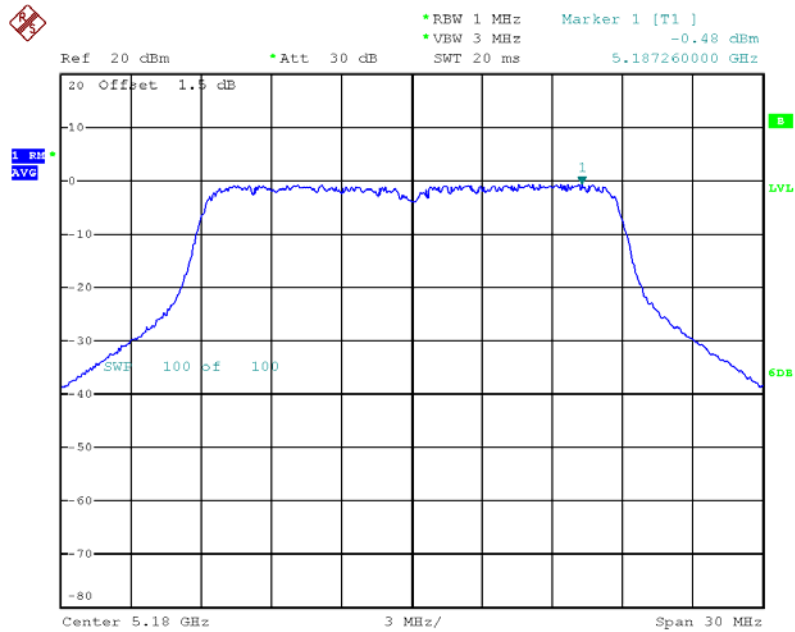


Date: 25.OCT.2012 12:41:17



Peak Power Spectral Density Plot on 5200 MHz, Non HT-20, 6Mbps

Tx1

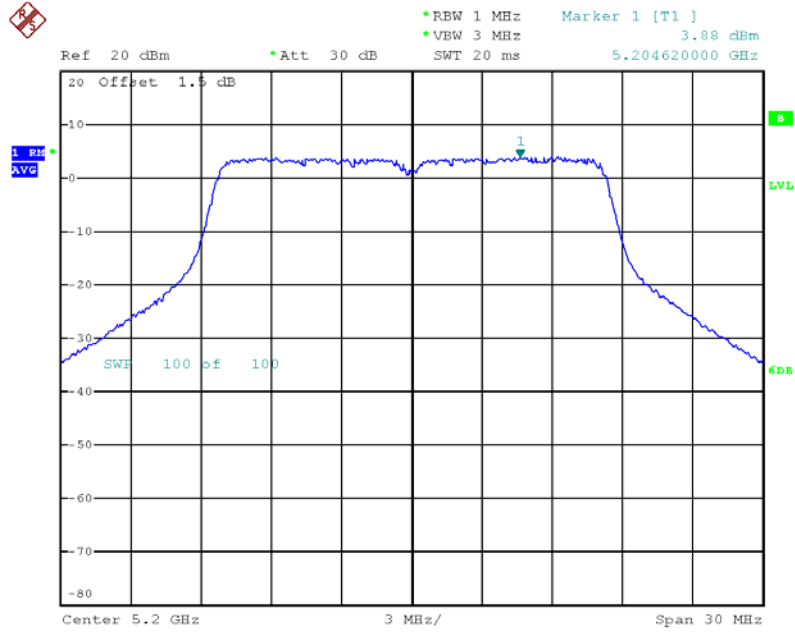


Date: 25.OCT.2012 09:20:12




Peak Power Spectral Density Plot on 5200 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

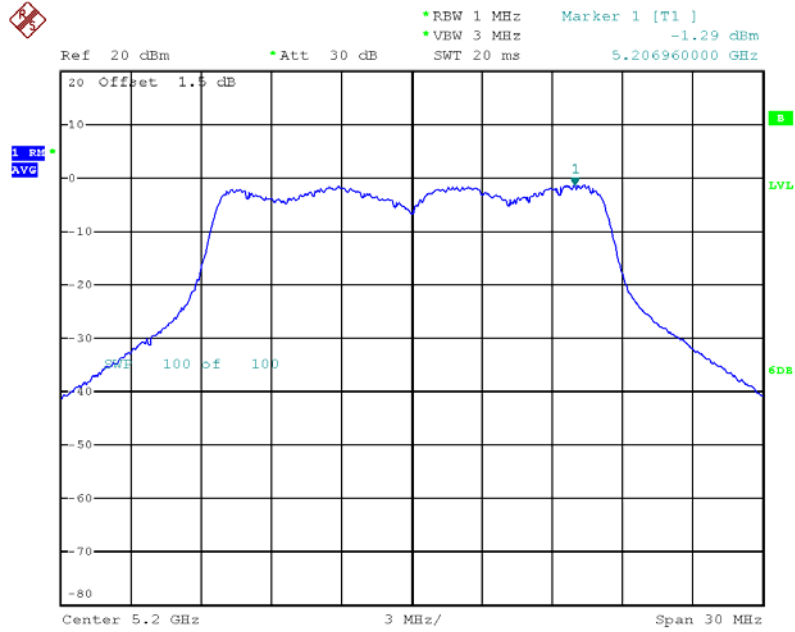

Date: 25.OCT.2012 12:09:54

Tx2

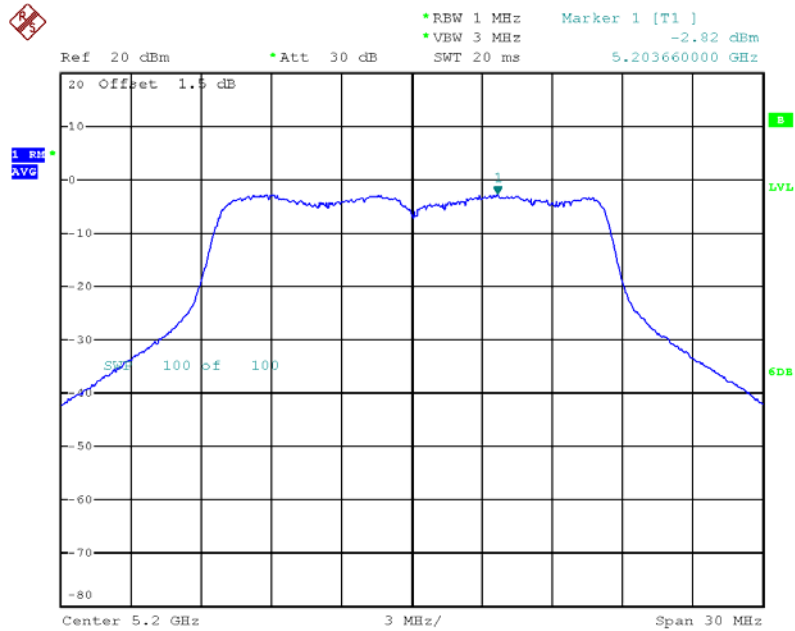


Date: 25.OCT.2012 12:10:21



Peak Power Spectral Density Plot on 5200 MHz, HT-20, M0

Tx1

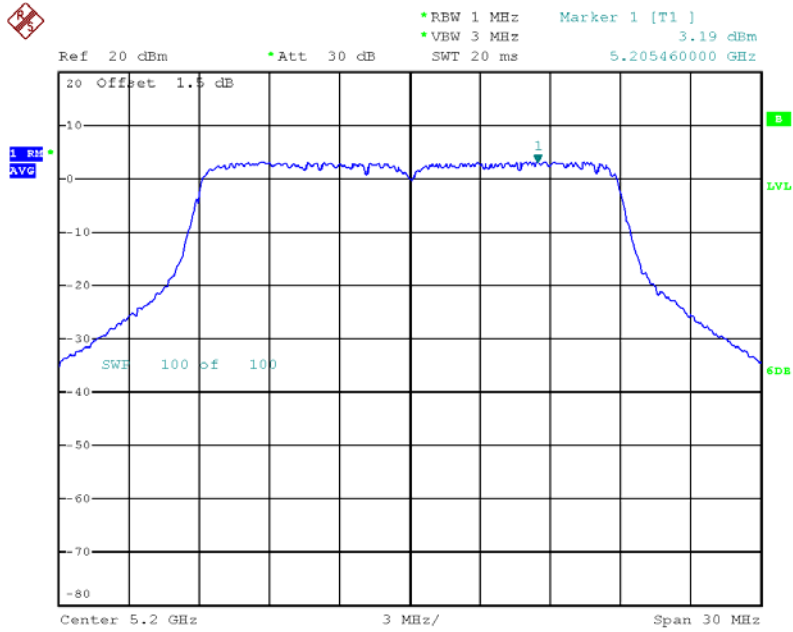


Date: 25.OCT.2012 09:26:57




Peak Power Spectral Density Plot on 5200 MHz, HT-20 / HT-20, Beam Forming, M0

Tx1

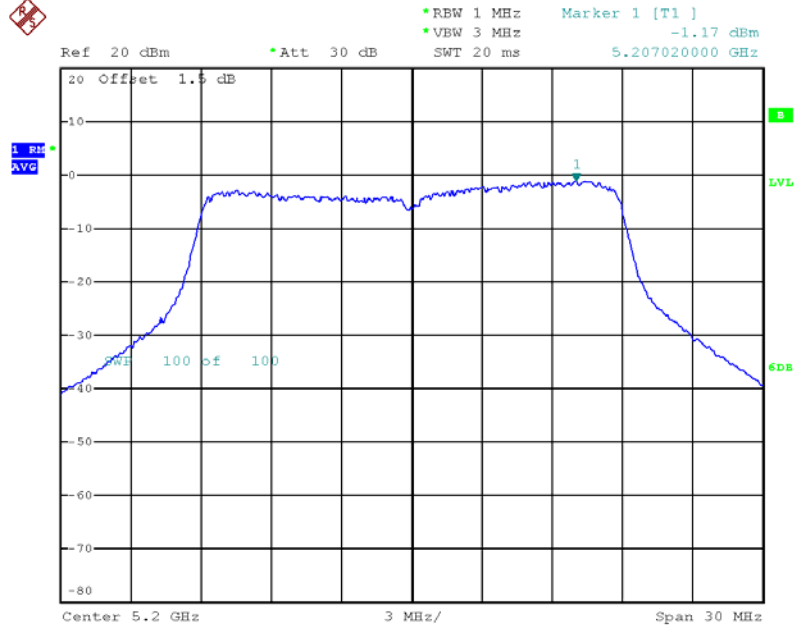

Date: 25.OCT.2012 12:46:22

Tx2

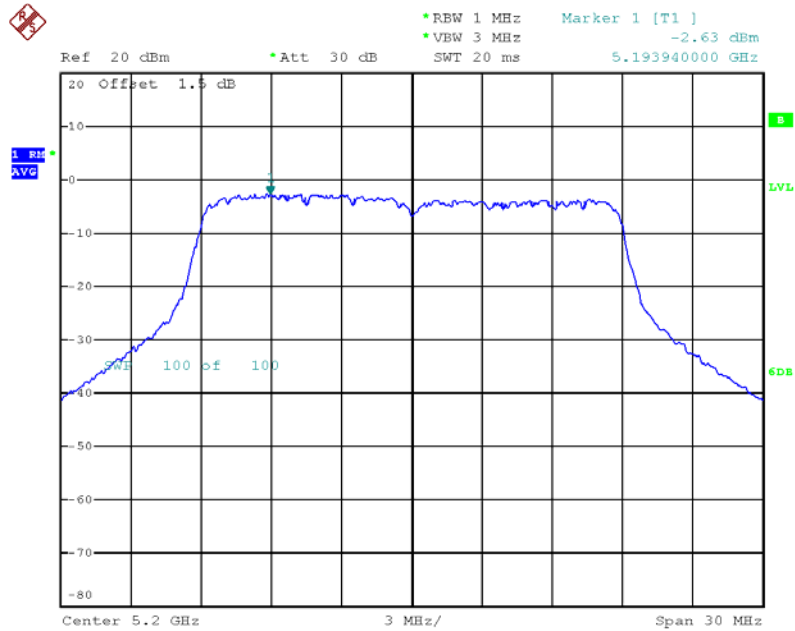


Date: 25.OCT.2012 12:46:52




Peak Power Spectral Density Plot on 5200 MHz, HT-20, STBC, M0

Tx1

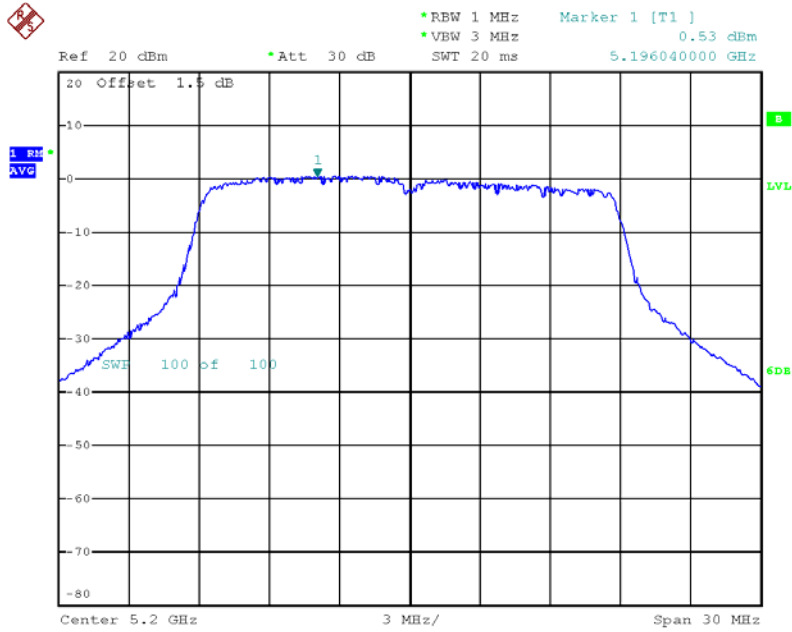

Date: 25.OCT.2012 12:49:09

Tx2

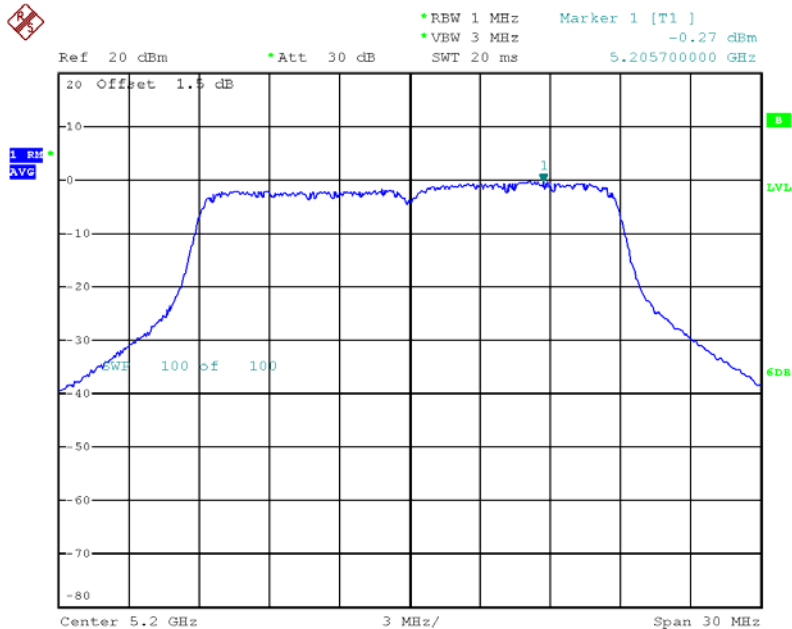


Date: 25.OCT.2012 12:49:40




Peak Power Spectral Density Plot on 5200 MHz, HT-20, Beam Forming, M8

Tx1

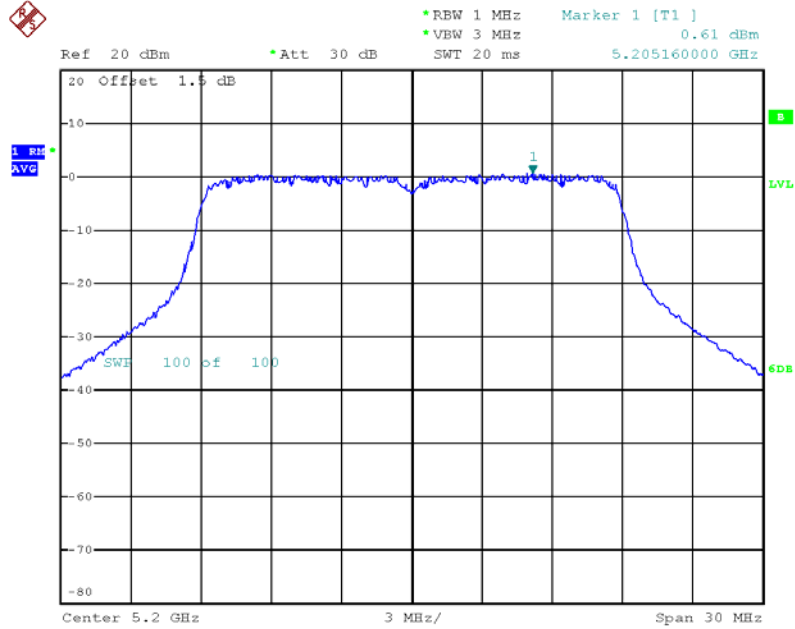

Date: 25.OCT.2012 12:52:03

Tx2

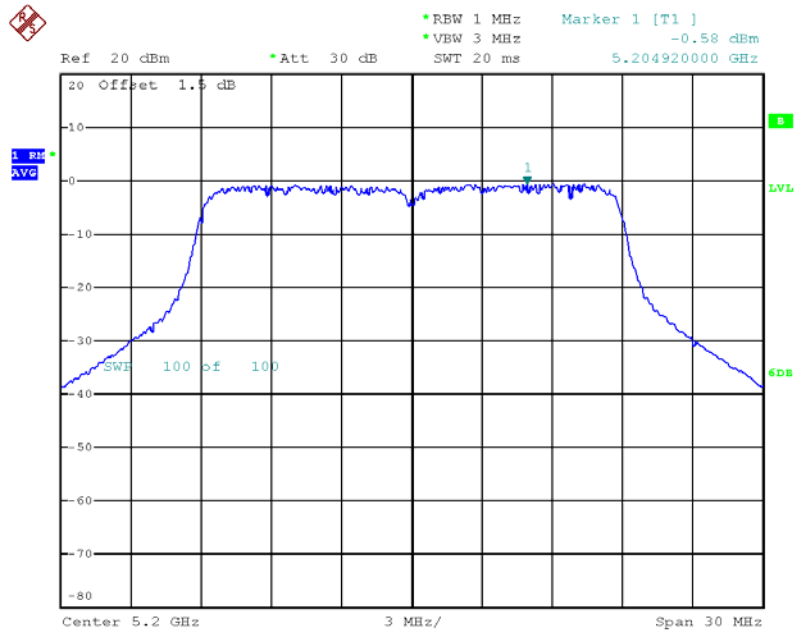


Date: 25.OCT.2012 12:52:25





Peak Power Spectral Density Plot on 5240 MHz, Non HT-20, 6Mbps

Tx1

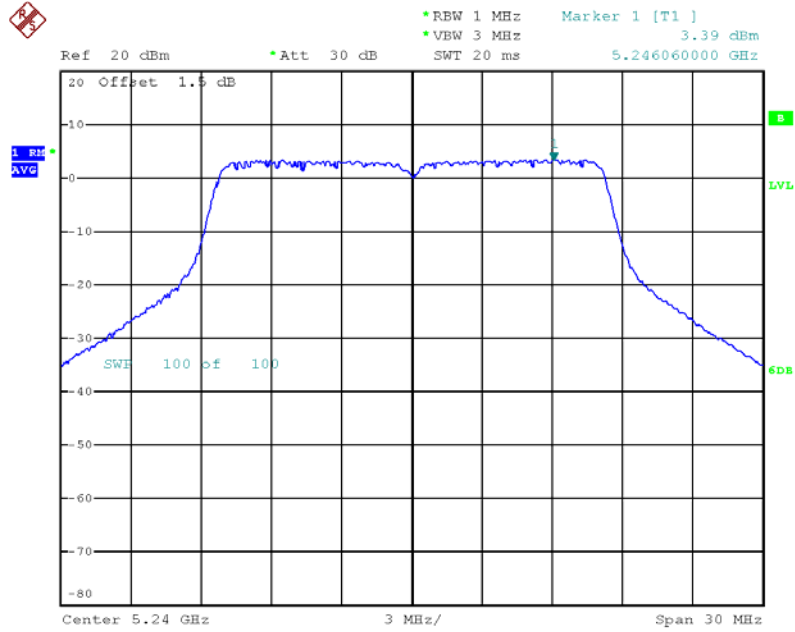


Date: 25.OCT.2012 09:24:08




Peak Power Spectral Density Plot on 5240 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

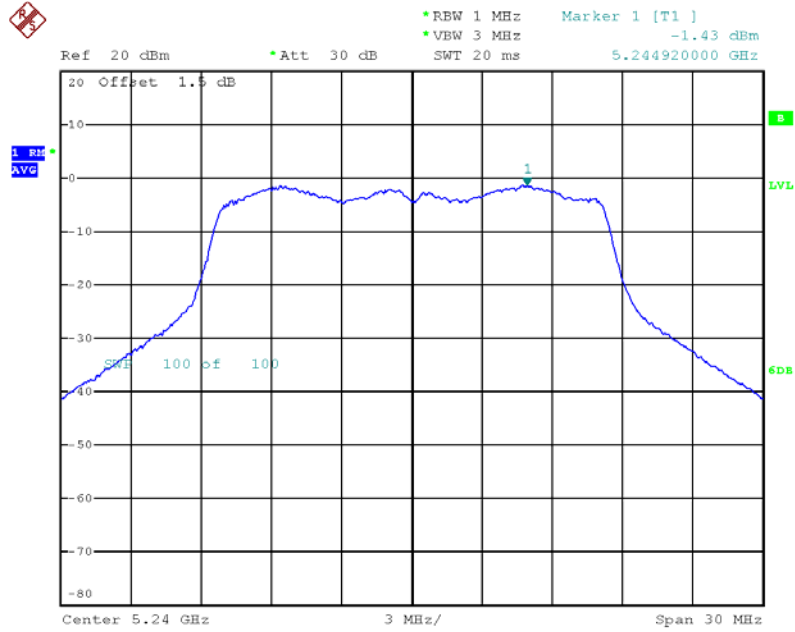

Date: 25.OCT.2012 12:11:44

Tx2

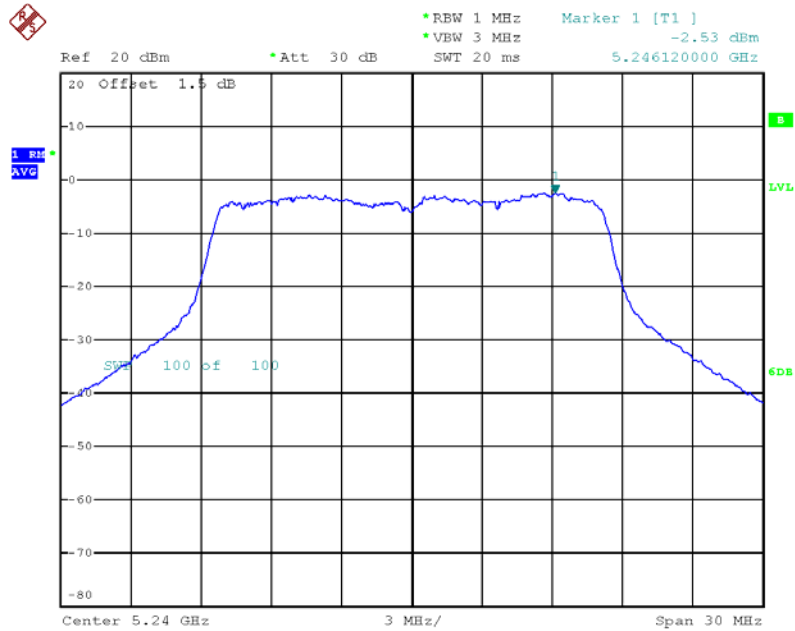


Date: 25.OCT.2012 12:12:10



Peak Power Spectral Density Plot on 5240 MHz, HT-20, M0

Tx1

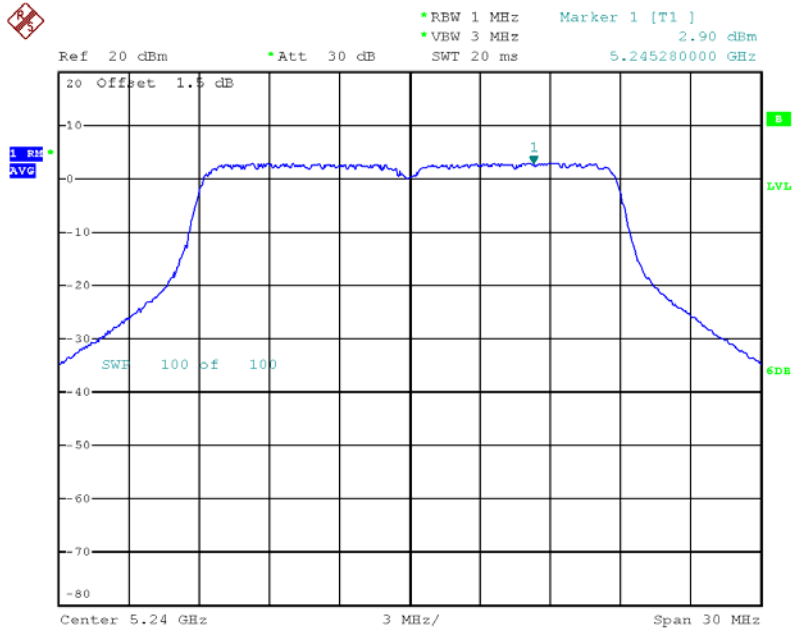


Date: 25.OCT.2012 09:25:28




Peak Power Spectral Density Plot on 5240 MHz, HT-20 / HT-20, Beam Forming, M0

Tx1

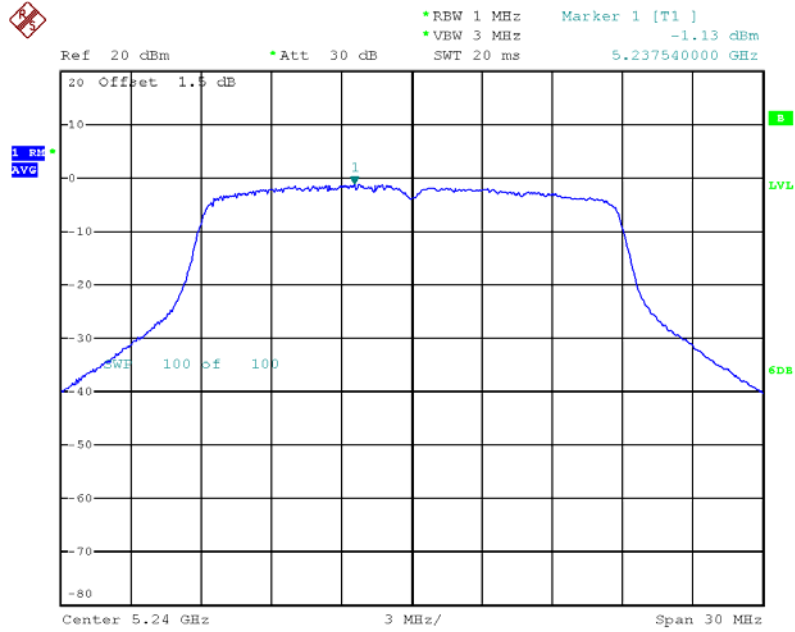

Date: 25.OCT.2012 13:00:05

Tx2

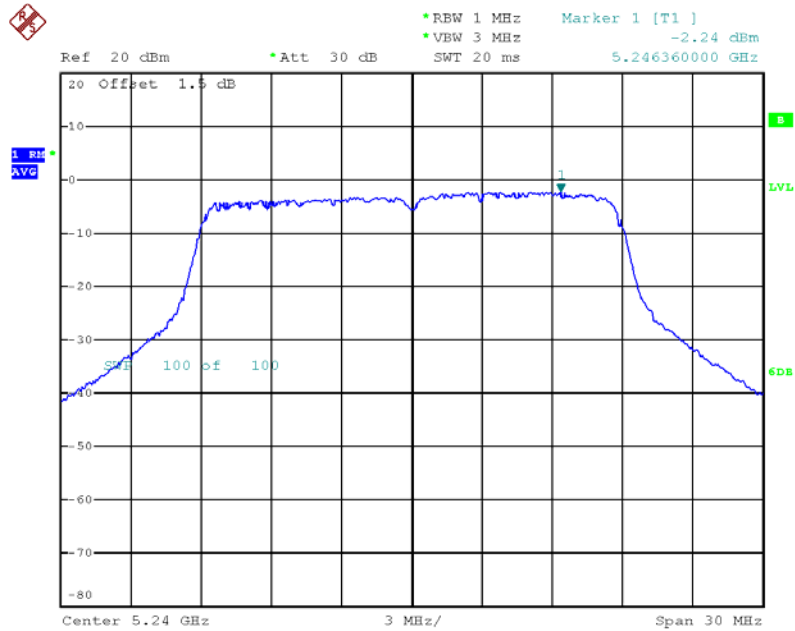


Date: 25.OCT.2012 13:00:22




Peak Power Spectral Density Plot on 5240 MHz, HT-20, STBC, M0

Tx1

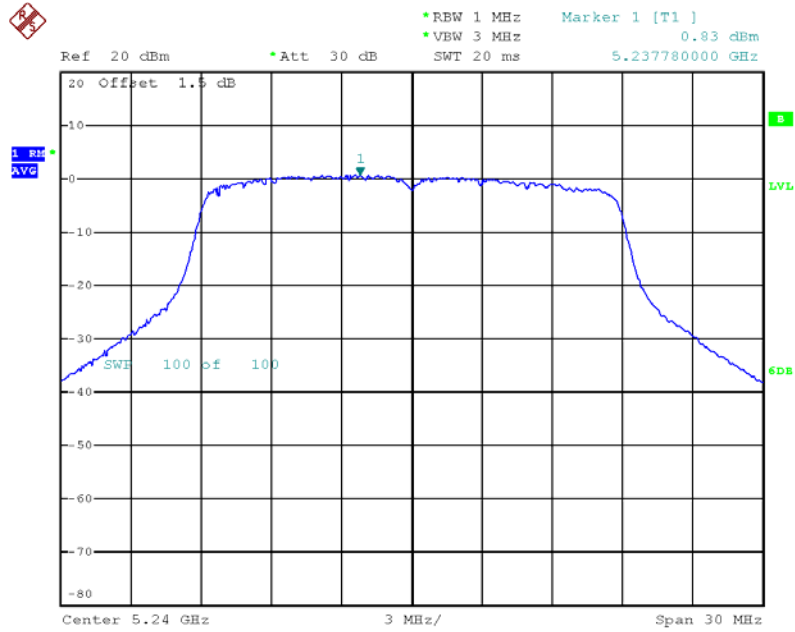

Date: 25.OCT.2012 13:01:03

Tx2

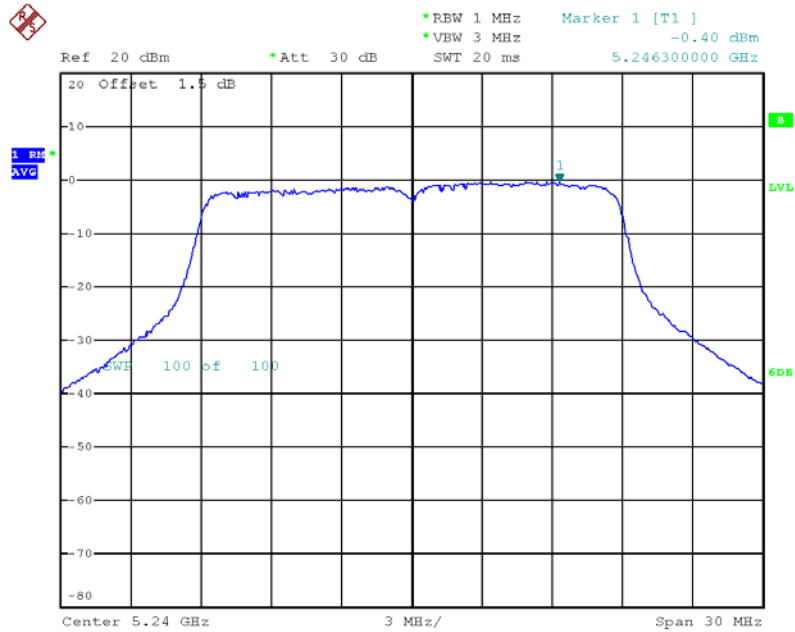


Date: 25.OCT.2012 13:01:46




Peak Power Spectral Density Plot on 5240 MHz, HT-20, Beam Forming, M8

Tx1

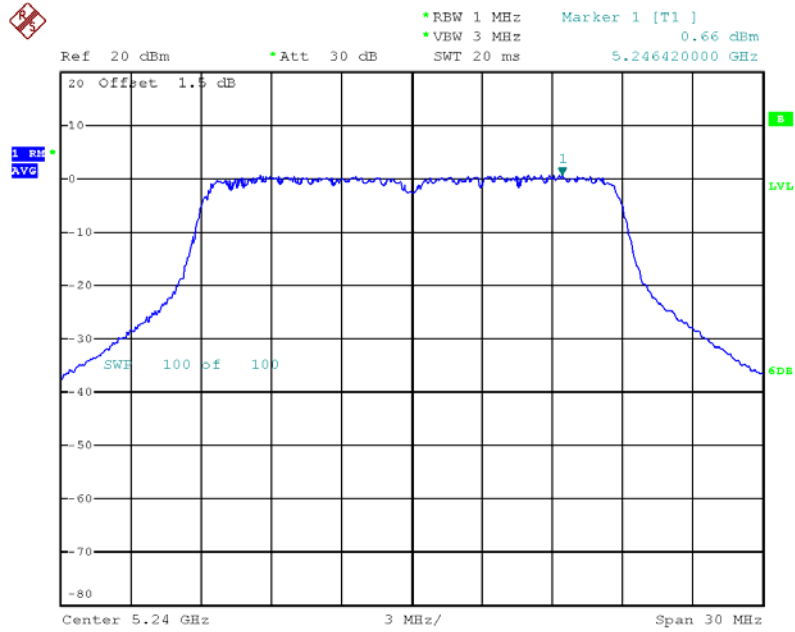

Date: 25.OCT.2012 13:04:48

Tx2

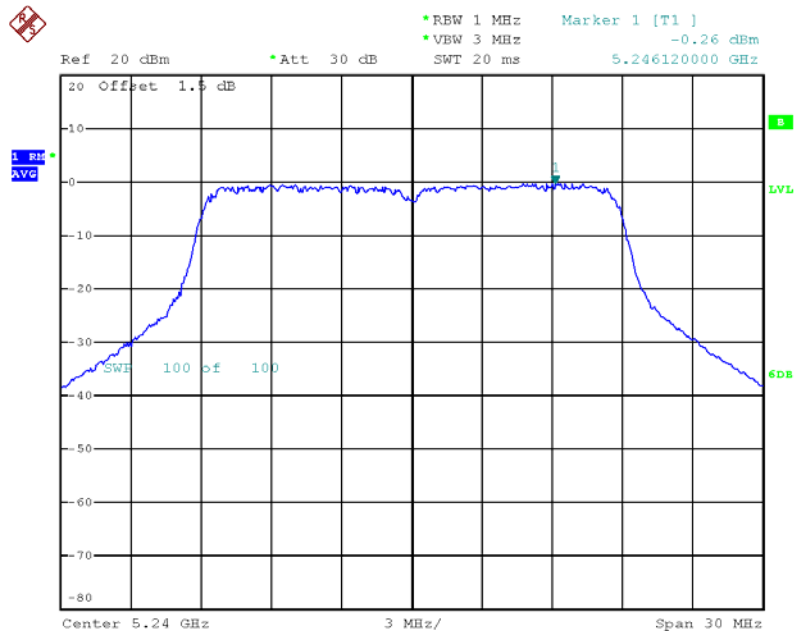


Date: 25.OCT.2012 13:05:22



Peak Power Spectral Density Plot on 5190 MHz, HT-40, M0

Tx1

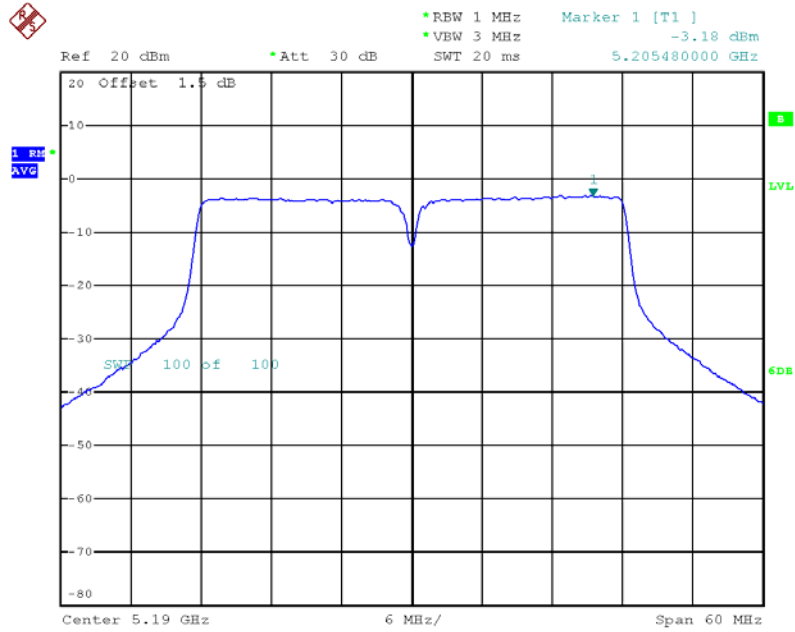


Date: 25.OCT.2012 09:30:05




Peak Power Spectral Density Plot on 5190 MHz, HT-40 / HT-40, Beam Forming, M0

Tx1

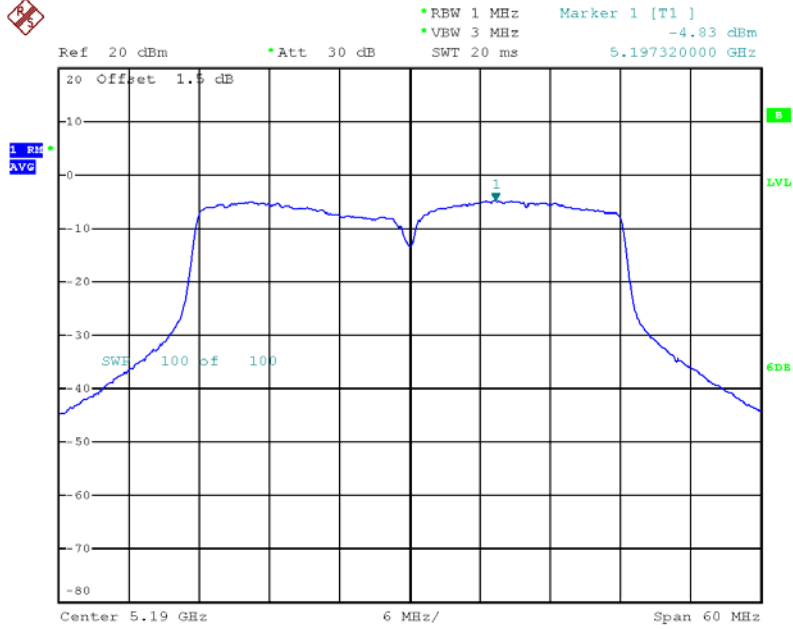

Date: 25.OCT.2012 13:08:02

Tx2

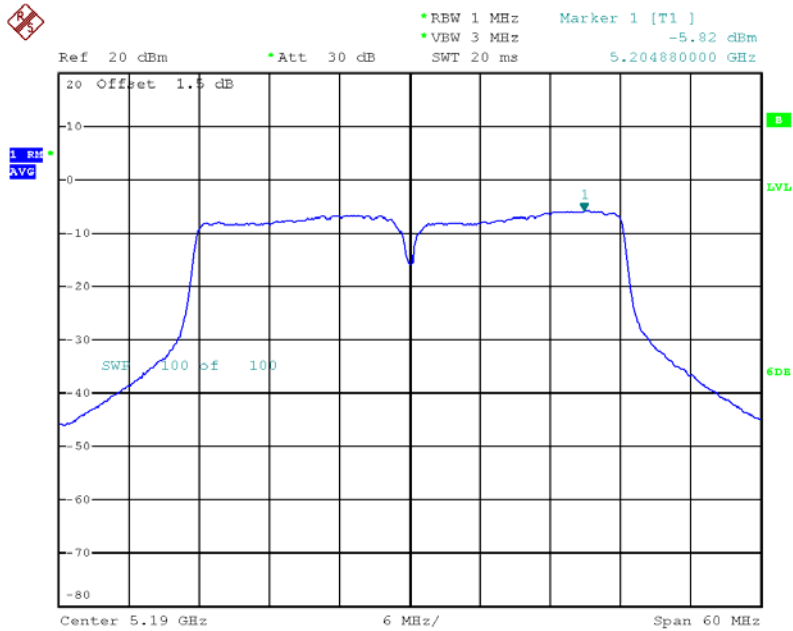


Date: 25.OCT.2012 13:08:33






Peak Power Spectral Density Plot on 5190 MHz, HT-40, STBC, M0

Tx1

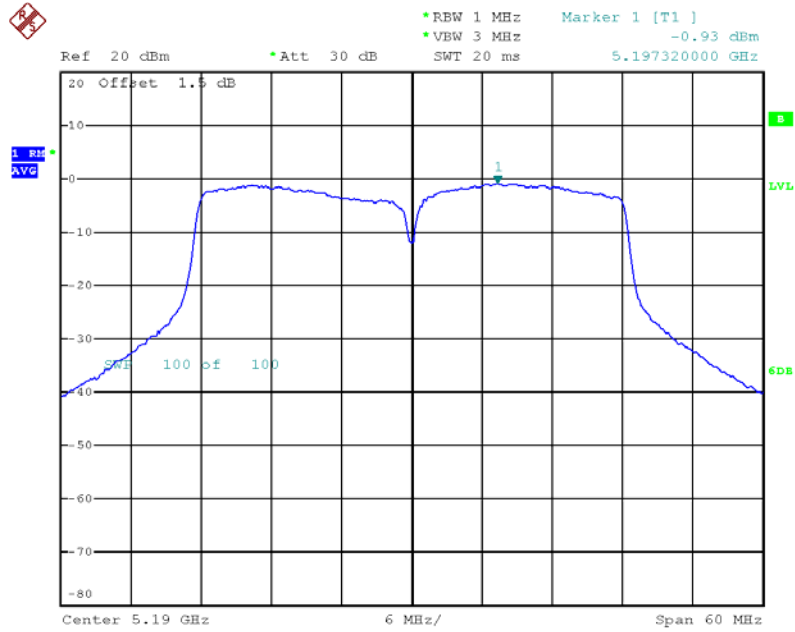

Date: 25.OCT.2012 13:06:34

Tx2

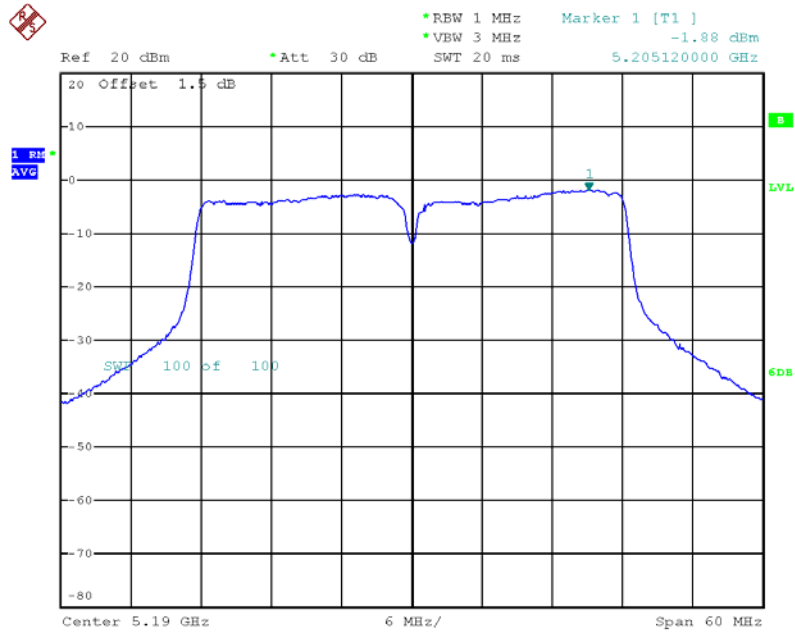


Date: 25.OCT.2012 13:06:51




Peak Power Spectral Density Plot on 5190 MHz, HT-40, Beam Forming, M8

Tx1

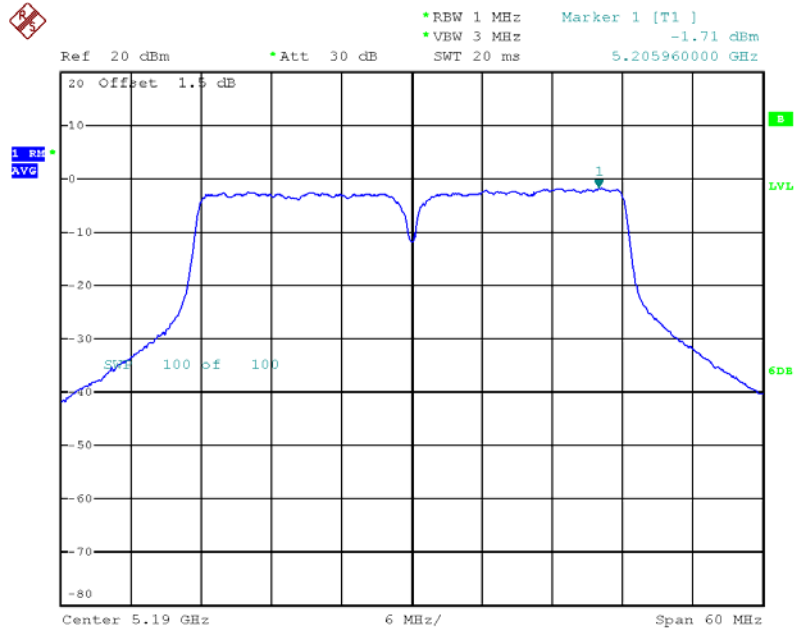

Date: 25.OCT.2012 13:10:47

Tx2

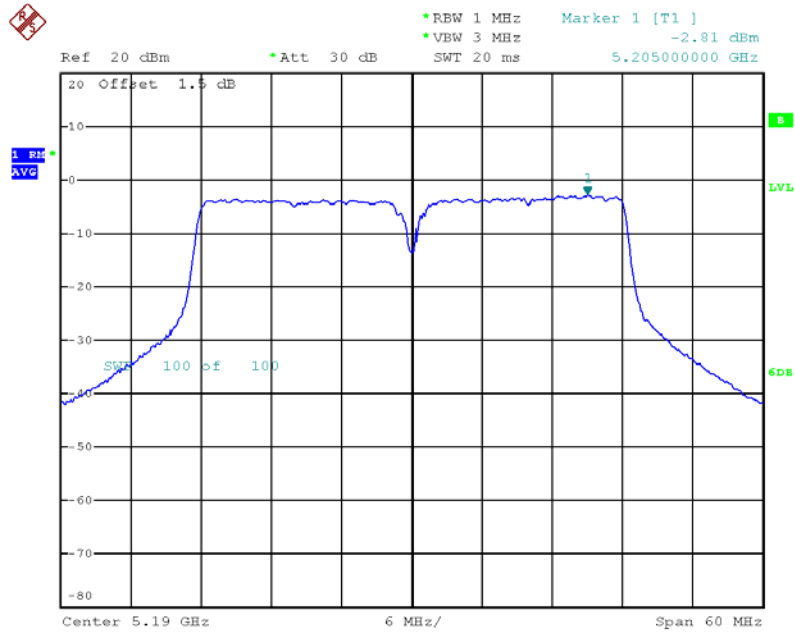


Date: 25.OCT.2012 13:11:09



Peak Power Spectral Density Plot on 5230 MHz, HT-40, M0

Tx1

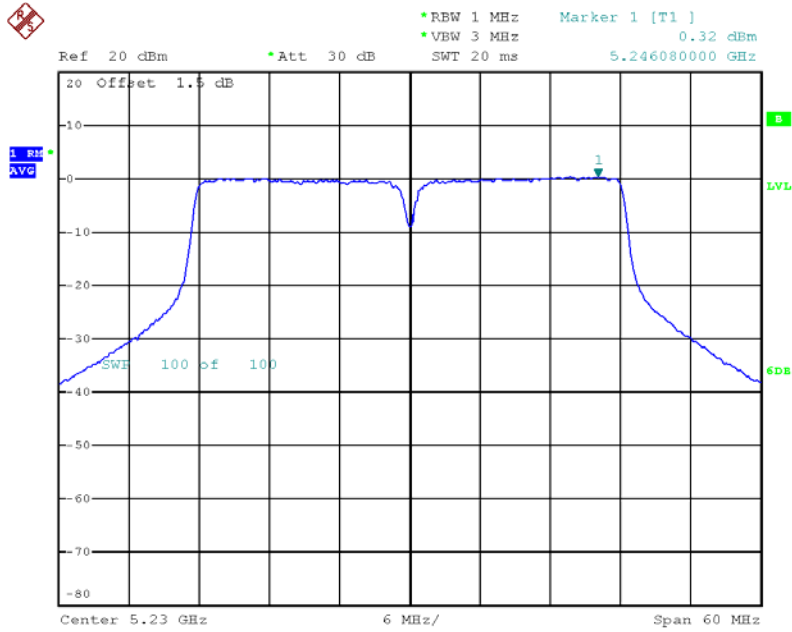


Date: 25.OCT.2012 09:31:11




Peak Power Spectral Density Plot on 5230 MHz, HT-40 / HT-40, Beam Forming, M0

Tx1

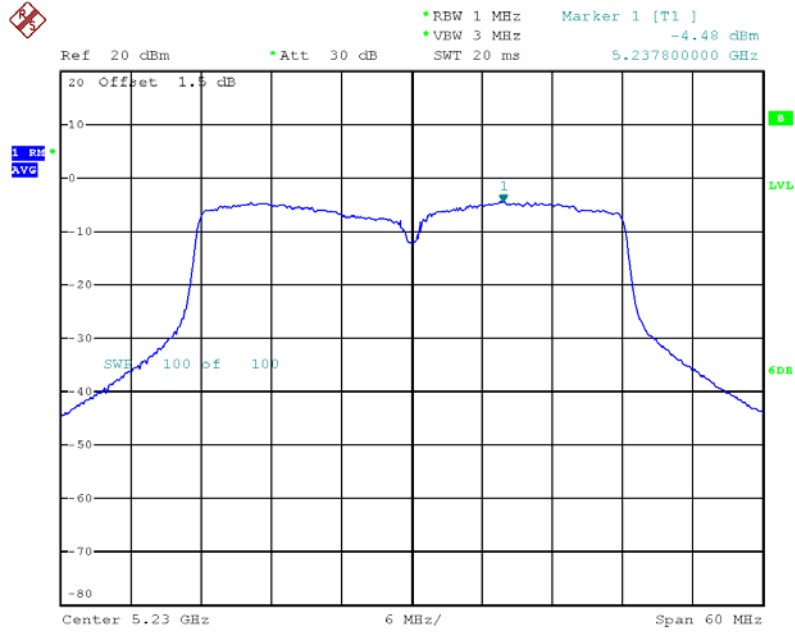

Date: 25.OCT.2012 13:12:36

Tx2

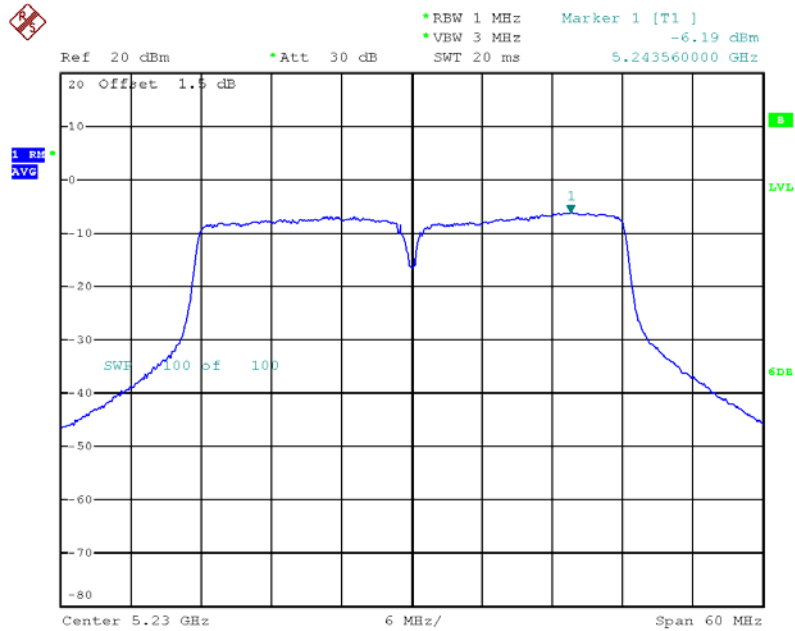


Date: 25.OCT.2012 13:12:54




Peak Power Spectral Density Plot on 5230 MHz, HT-40, STBC, M0

Tx1

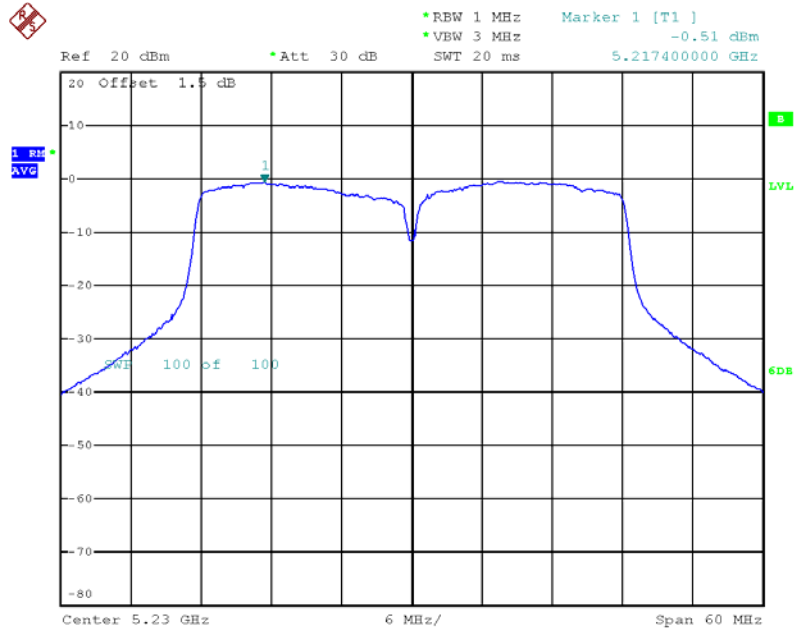

Date: 25.OCT.2012 13:11:50

Tx2

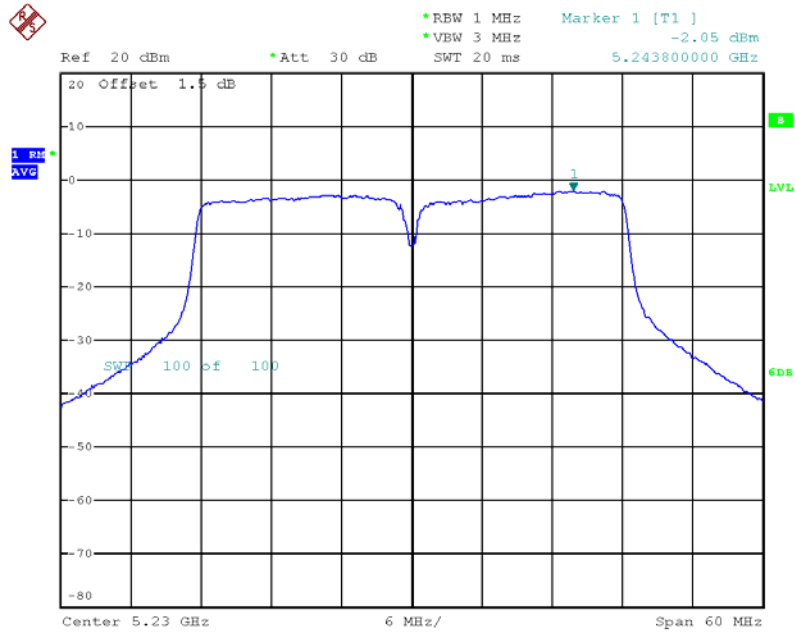


Date: 25.OCT.2012 13:12:09




Peak Power Spectral Density Plot on 5230 MHz, HT-40, Beam Forming, M8

Tx1

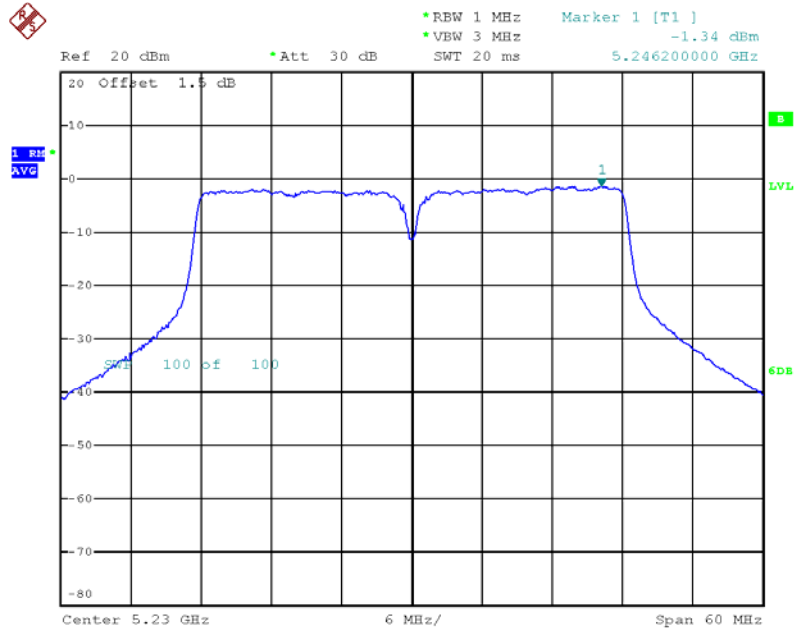

Date: 25.OCT.2012 13:13:31

Tx2

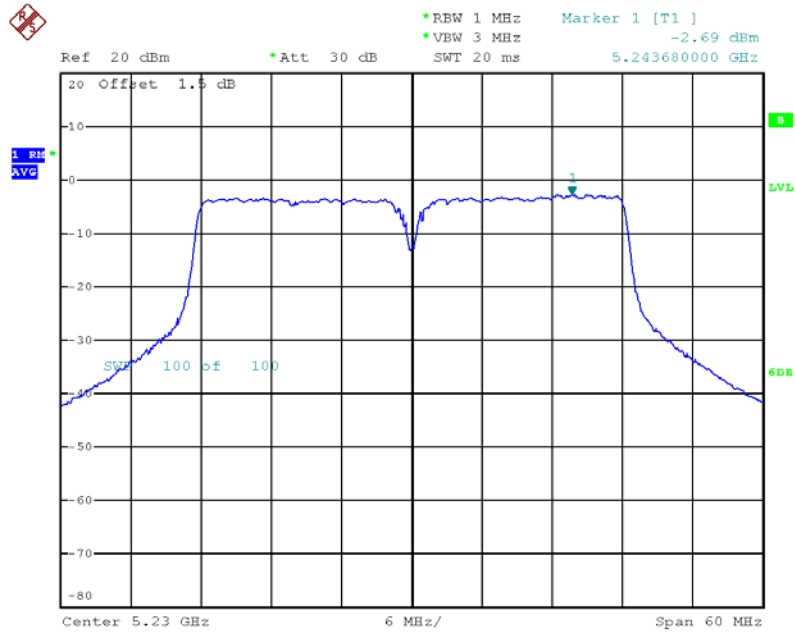

Date: 25.OCT.2012 13:13:49

### 3.5 Peak Excursion

#### 3.5.1 Peak Excursion Limit

Peak Excursion Limit
Peak excursion $\leq$ 13 dB. The ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed 13 dB. (Earlier procedures that required computing the ratio of the two spectra at each frequency across the emission bandwidth can lead to unintended failures at band edges and will no longer be required.)


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause F peak excursion method.
<input checked="" type="checkbox"/> Testing each modulation mode on a single channel is sufficient to demonstrate compliance with the peak excursion requirement
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using given below method: Refer as FCC KDB 662911, when testing in-band (peak to average ratio) against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(N)$ .
<input checked="" type="checkbox"/> Test result plots with peak excursion ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum.

#### 3.5.4 Test Setup

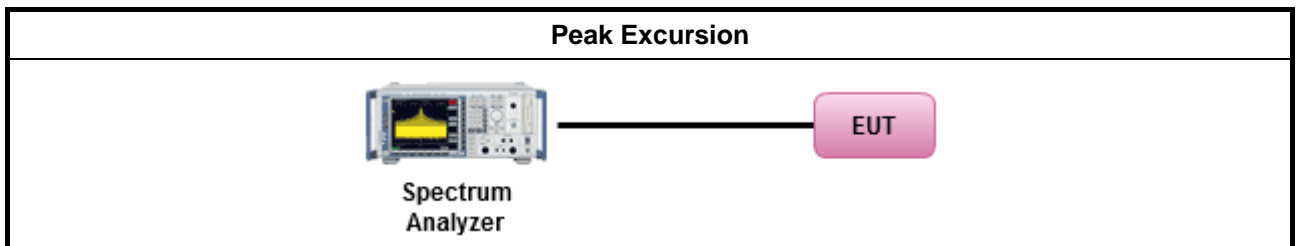




3.5.5 Test Result of Peak Excursion

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Conducted Spur Delta (dB)	Limit (dB)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	6	8.95	13	4.05
	Non HT-20, 6 to 54Mbps	6	9.62	13	3.38
	Non HT-20, Beam Forming, 6 to 54Mbps	6	9.62	13	3.38
	HT-20, M0 to M7	M0	9.19	13	3.81
	HT-20, M0 to M15	M0	10.48	13	2.52
	HT-20, STBC, M0 to M7	M0	10.48	13	2.52
	HT-20, Beam Forming, M0 to M7	M0	10.48	13	2.52
	HT-20, Beam Forming, M8 to M15	M8	10.48	13	2.52
5200	Non HT-20, 6 to 54Mbps	6	10	13	3
	Non HT-20, 6 to 54Mbps	6	10.53	13	2.47
	Non HT-20, Beam Forming, 6 to 54Mbps	6	10.53	13	2.47
	HT-20, M0 to M7	M0	9.32	13	3.68
	HT-20, M0 to M15	M0	11.17	13	1.83
	HT-20, STBC, M0 to M7	M0	11.17	13	1.83
	HT-20, Beam Forming, M0 to M7	M0	11.17	13	1.83
	HT-20, Beam Forming, M8 to M15	M8	11.17	13	1.83
5240	Non HT-20, 6 to 54Mbps	6	9.21	13	3.79
	Non HT-20, 6 to 54Mbps	6	9.62	13	3.38
	Non HT-20, Beam Forming, 6 to 54Mbps	6	9.62	13	3.38
	HT-20, M0 to M7	M0	9.33	13	3.67
	HT-20, M0 to M15	M0	10.68	13	2.32
	HT-20, STBC, M0 to M7	M0	10.68	13	2.32
	HT-20, Beam Forming, M0 to M7	M0	10.68	13	2.32
	HT-20, Beam Forming, M8 to M15	M8	10.68	13	2.32
5190	HT-40, M0 to M7	M0	9.41	13	3.59
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	9.44	13	3.56
	HT-40, Beam Forming, M0 to M7	M0	9.44	13	3.56
	HT-40, Beam Forming, M8 to M15	M8	9.44	13	3.56
5230	HT-40, M0 to M7	M0	9.22	13	3.78
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	9.91	13	3.09
	HT-40, Beam Forming, M0 to M7	M0	9.91	13	3.09
	HT-40, Beam Forming, M8 to M15	M8	9.91	13	3.09






Peak Excursion Plot on 5180 MHz, Non HT-20, 6Mbps

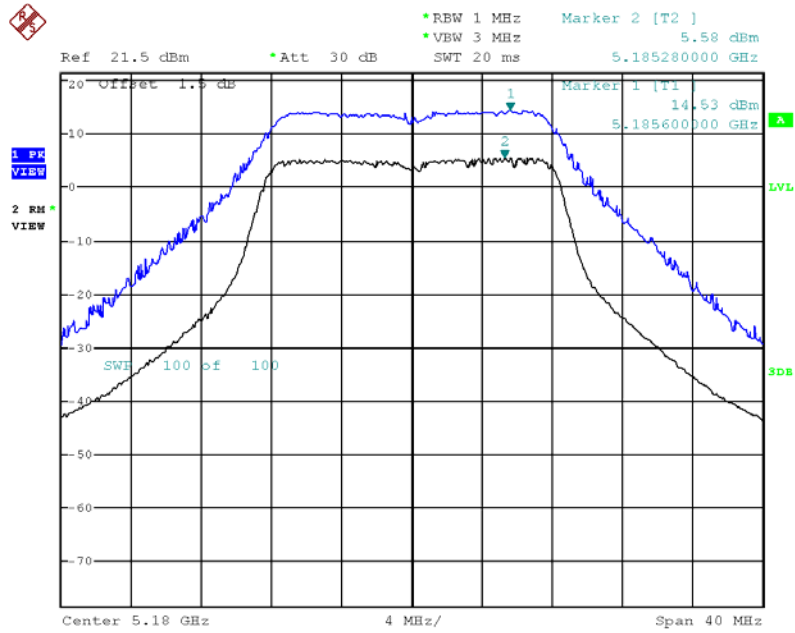

Date: 26.OCT.2012 01:03:10


Peak Excursion Plot on 5180 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

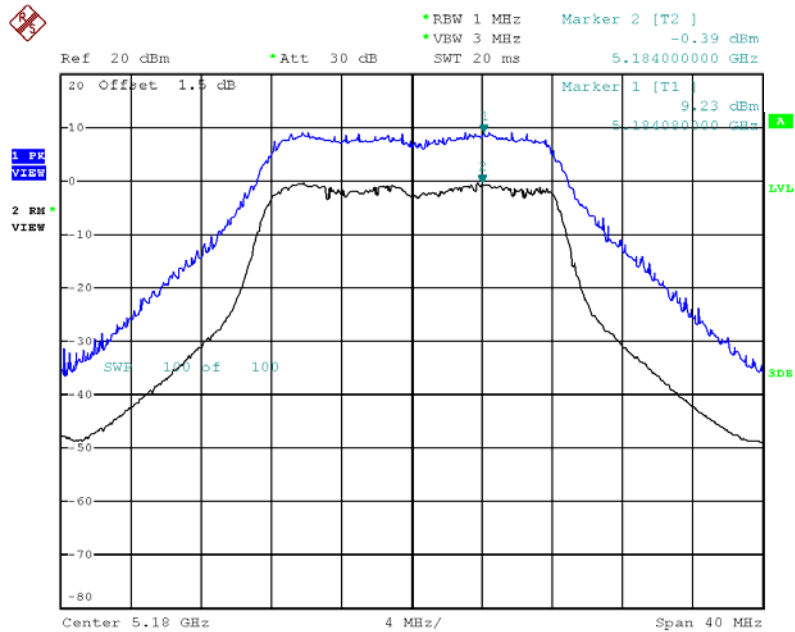

Date: 26.OCT.2012 13:39:07




Peak Excursion Plot on 5180 MHz, HT-20, M0

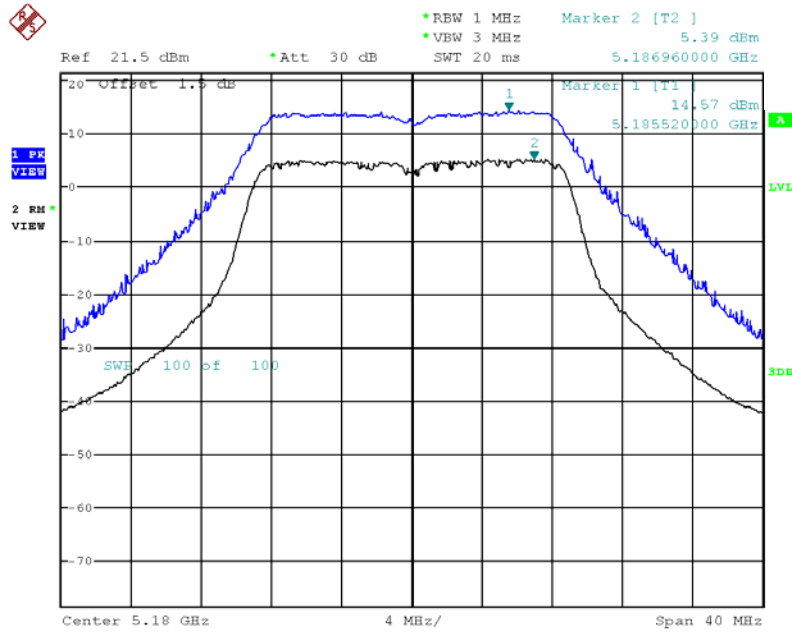


Date: 26.OCT.2012 01:04:38

Peak Excursion Plot on 5180 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0, M8

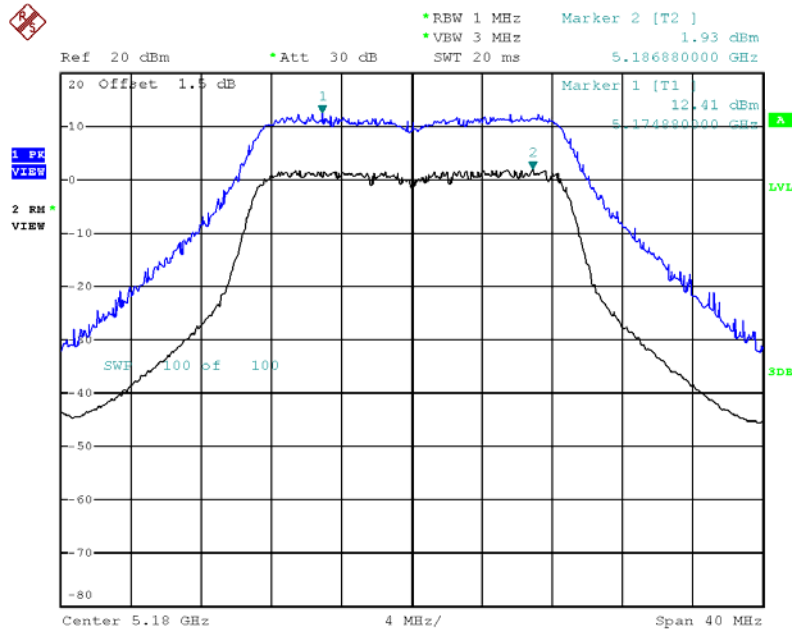


Date: 26.OCT.2012 13:40:06

Peak Excursion Plot on 5200 MHz, Non HT-20, 6Mbps

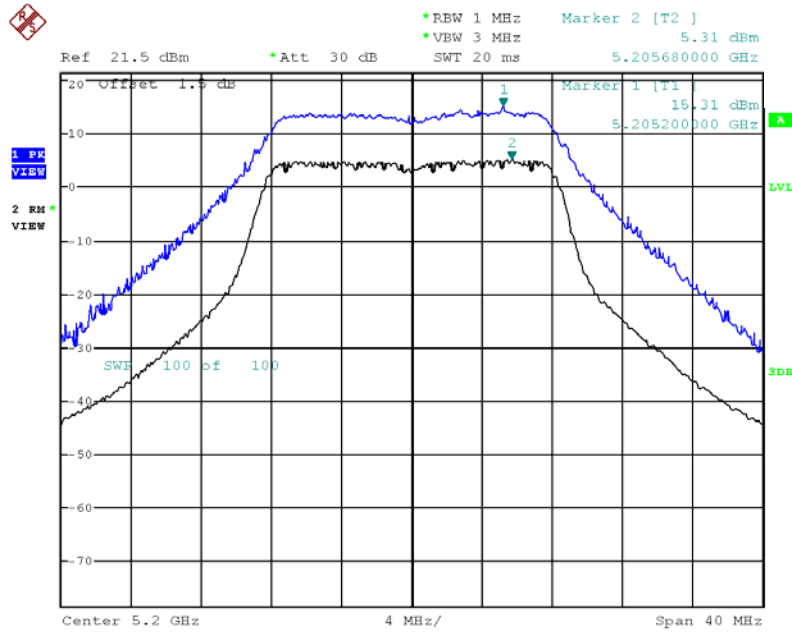

Date: 26.OCT.2012 01:06:09


Peak Excursion Plot on 5200 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

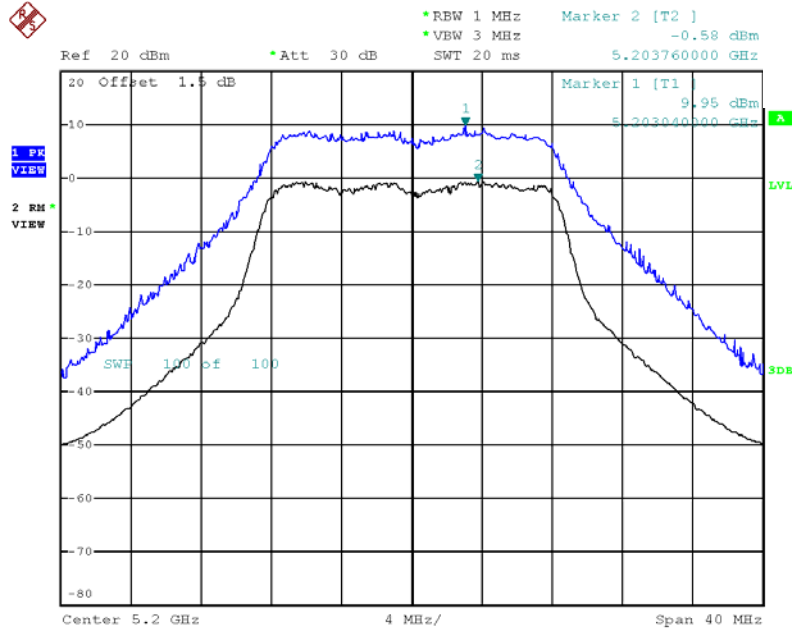

Date: 26.OCT.2012 13:42:52




Peak Excursion Plot on 5200 MHz, HT-20, M0

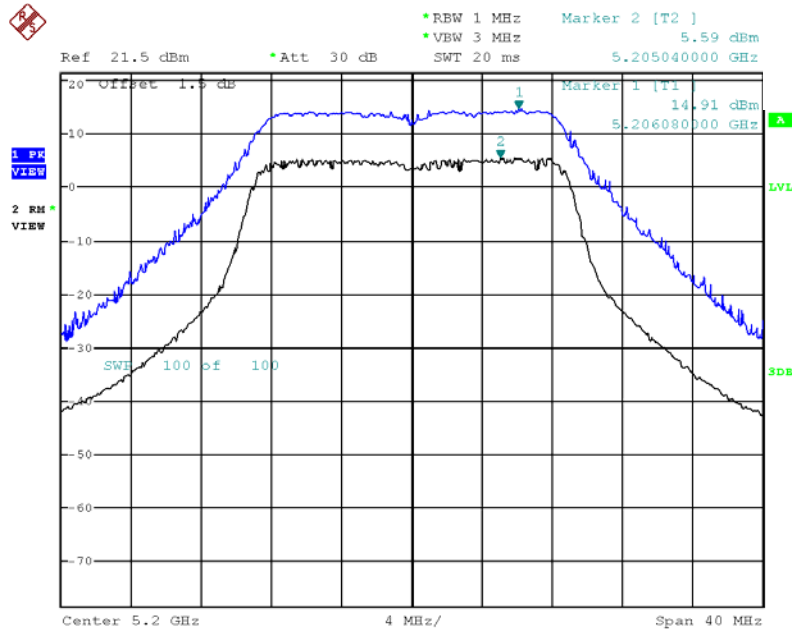

Date: 26.OCT.2012 01:07:06


Peak Excursion Plot on 5200 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0, M8

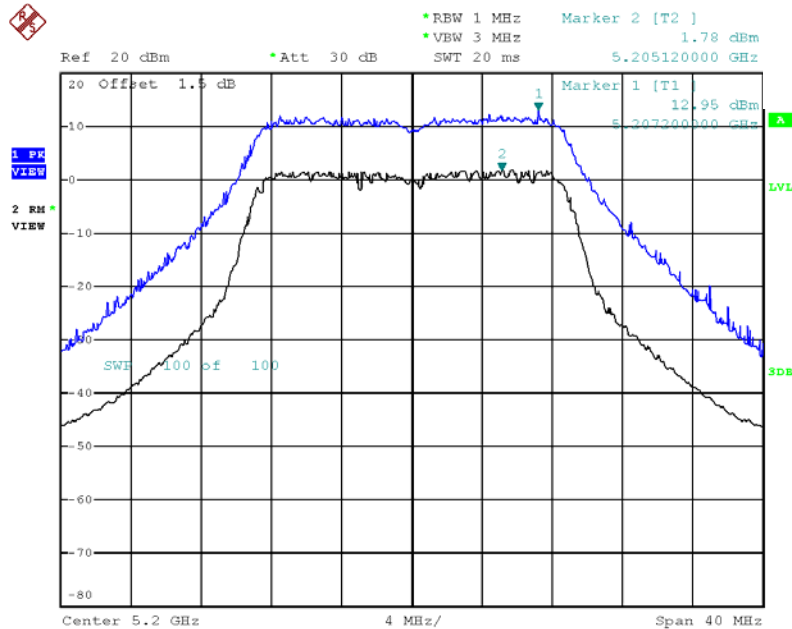

Date: 26.OCT.2012 13:42:10




Peak Excursion Plot on 5240 MHz, Non HT-20, 6Mbps

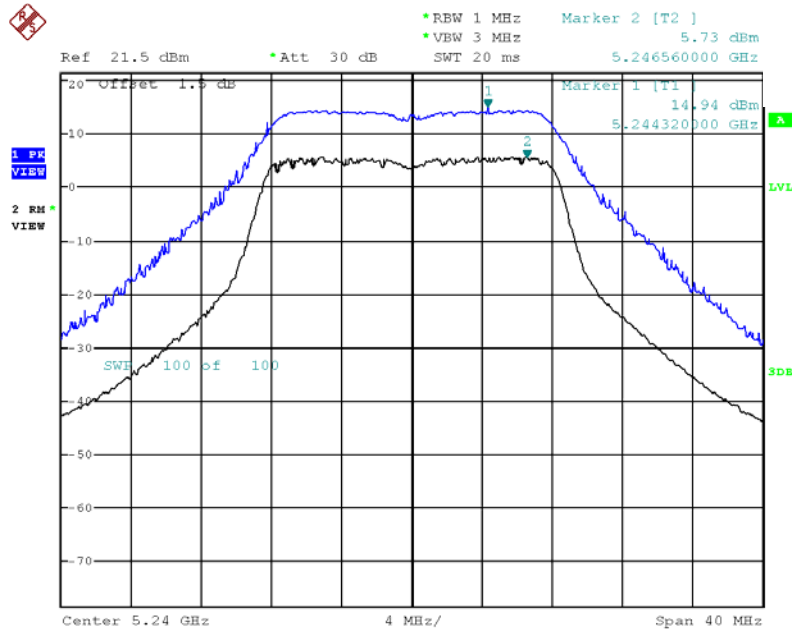

Date: 26.OCT.2012 01:08:36


Peak Excursion Plot on 5240 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

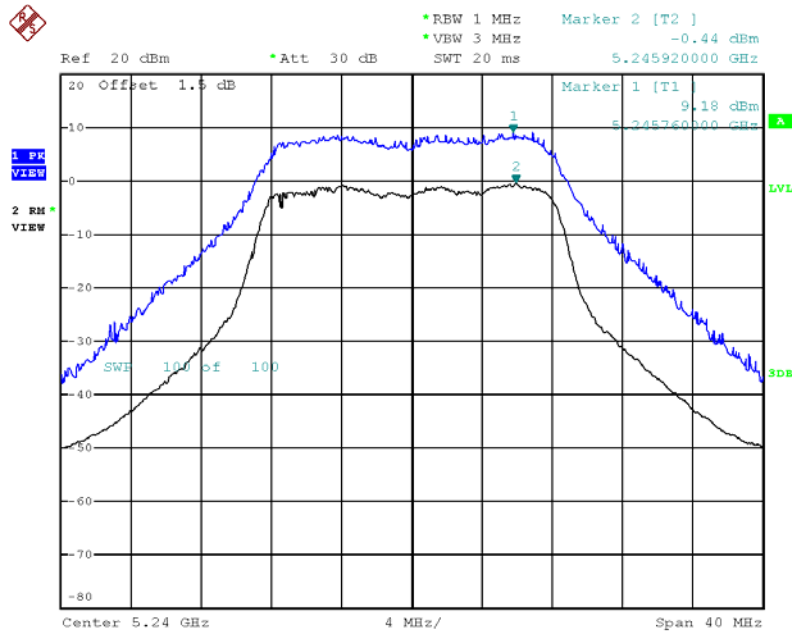

Date: 26.OCT.2012 13:47:19




Peak Excursion Plot on 5240 MHz, HT-20, M0

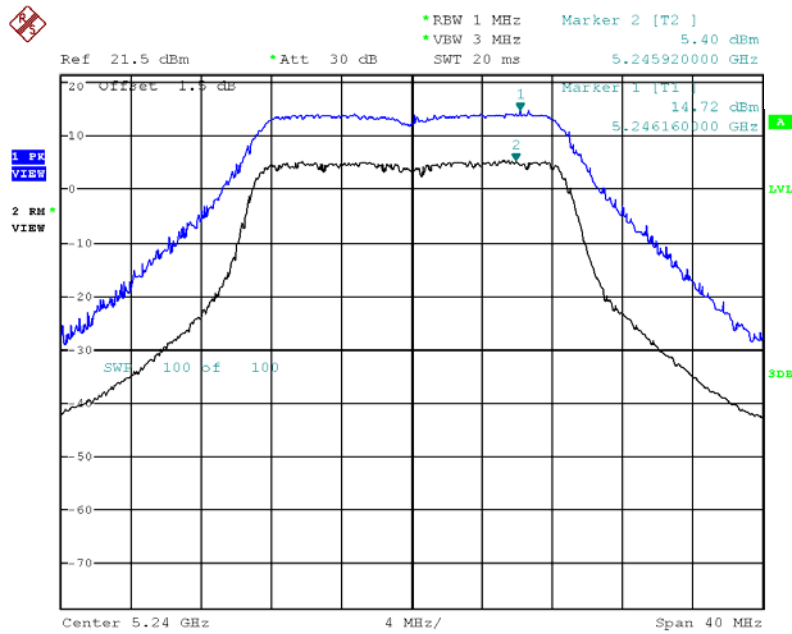

Date: 26.OCT.2012 01:09:13


Peak Excursion Plot on 5240 MHz, HT-20 / HT-20, STBC / HT-20, Beam Forming, M0, M8

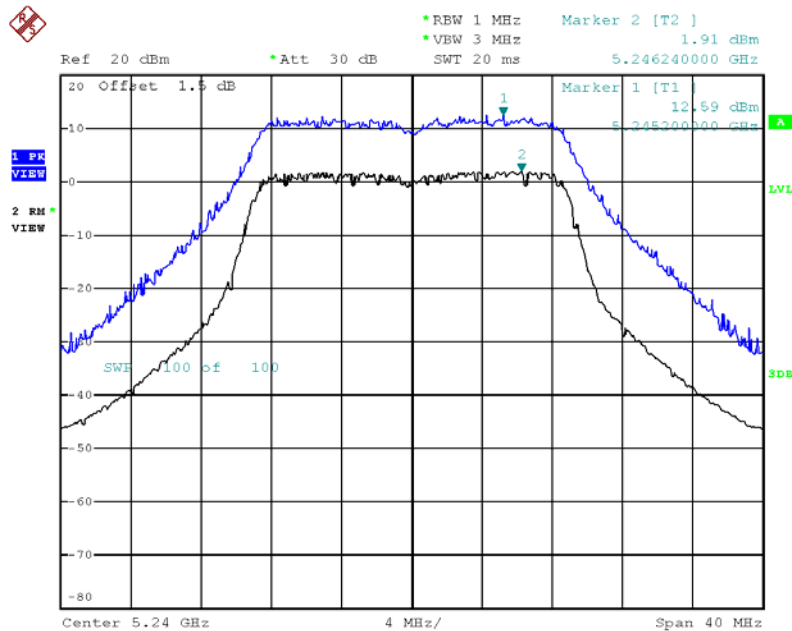

Date: 26.OCT.2012 13:49:06




Peak Excursion Plot on 5190 MHz, HT-40, M0

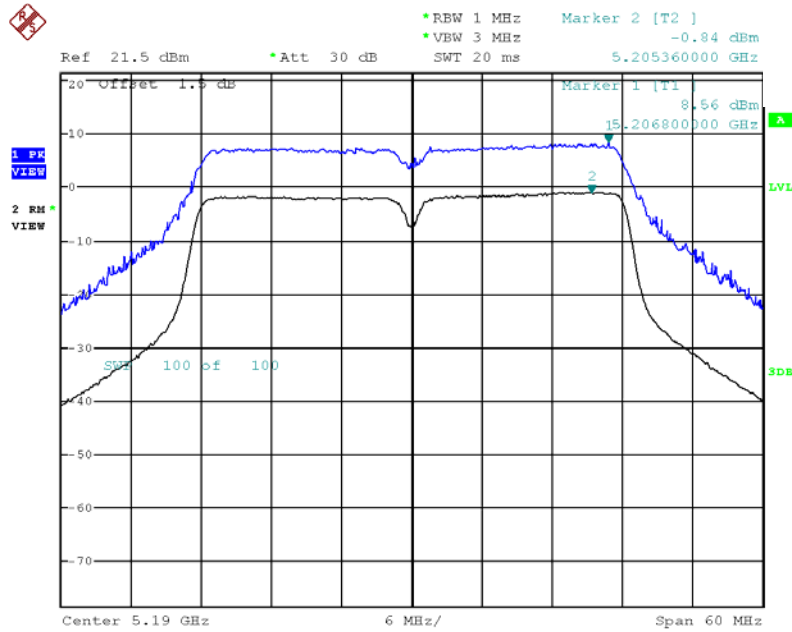

Date: 26.OCT.2012 01:10:25


Peak Excursion Plot on 5190 MHz, HT-40 / HT-40, STBC / HT-40, Beam Forming, M0, M8

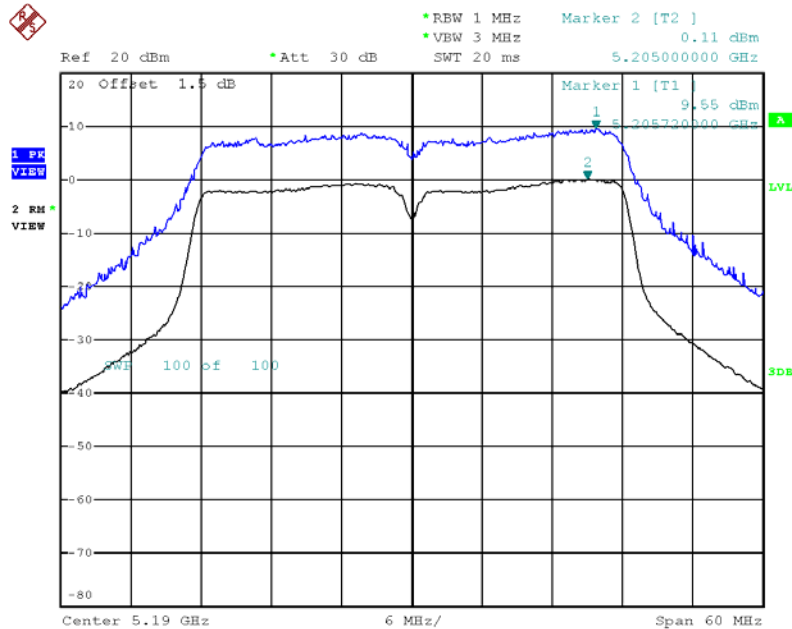

Date: 26.OCT.2012 13:51:28




Peak Excursion Plot on 5230 MHz, HT-40, M0

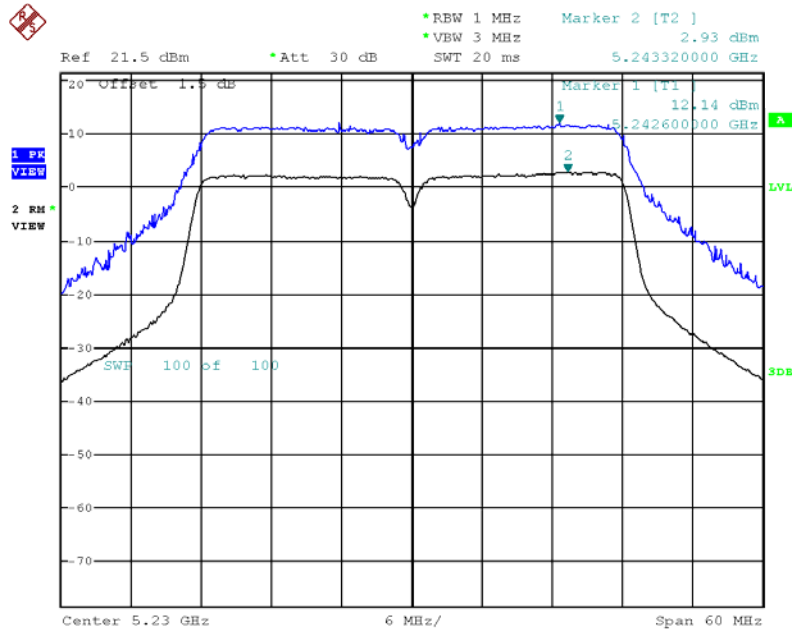

Date: 26.OCT.2012 01:11:29

Peak Excursion Plot on 5230 MHz, HT-40 / HT-40, STBC / HT-40, Beam Forming, M0, M8

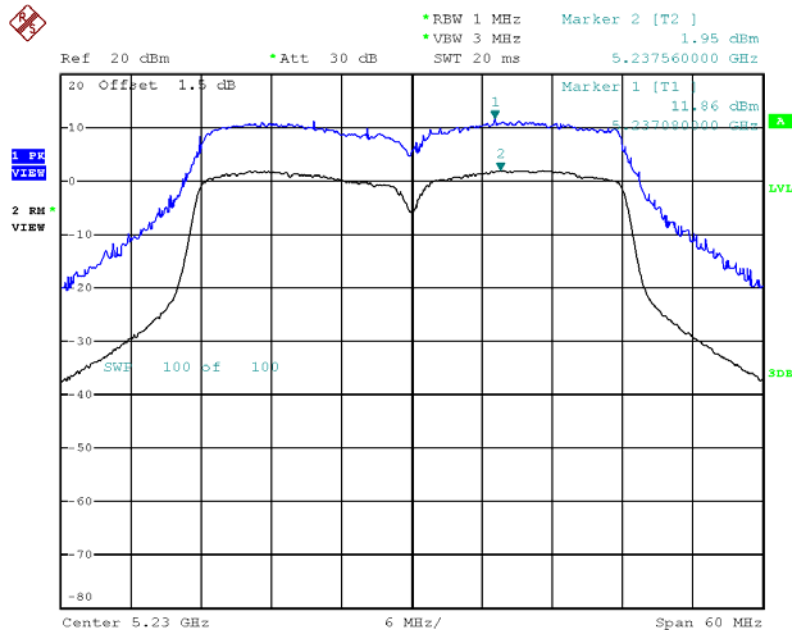


Date: 26.OCT.2012 13:52:50



### 3.6 Transmitter Conducted Bandedge Emissions

#### 3.6.1 Transmitter Conducted Bandedge Emissions Limit

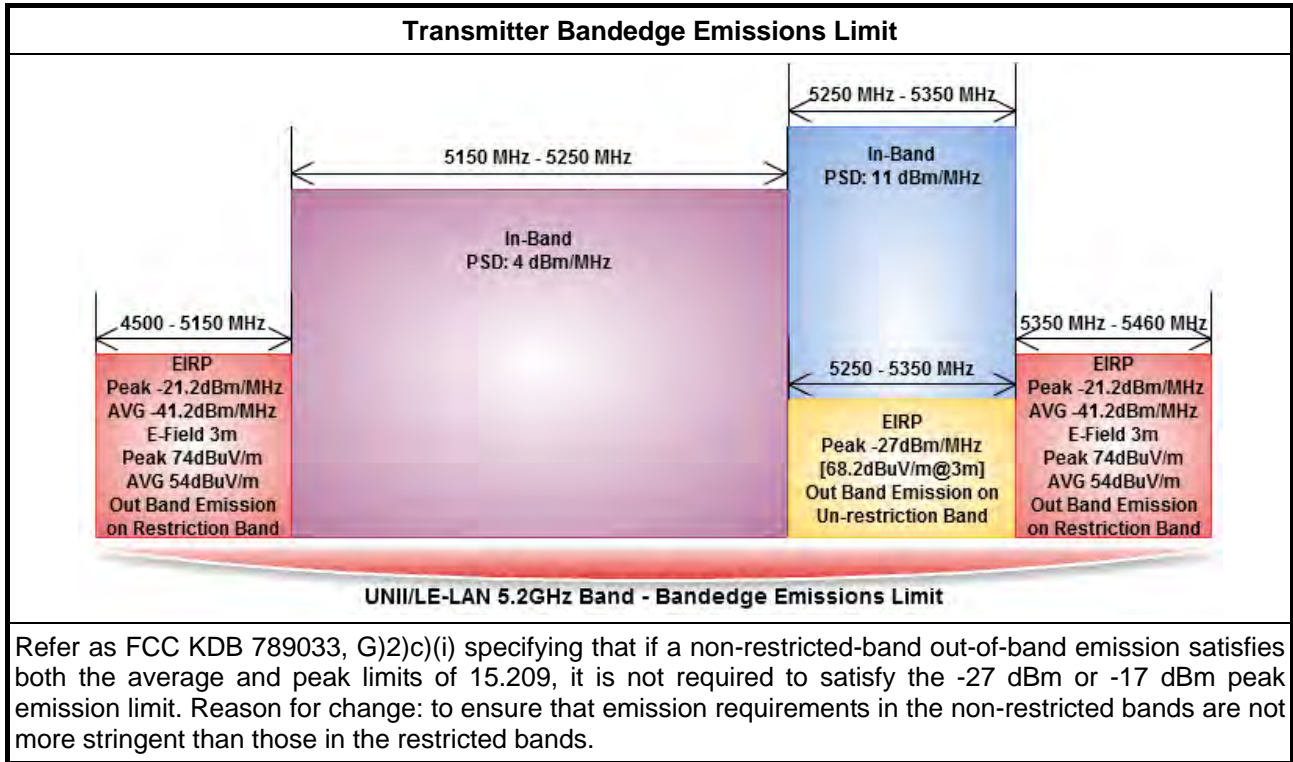


#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.6.3 Test Procedures**

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) - Duty cycle $\geq$ 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 789033, clause G)3)d) marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For conducted measurement, refer as FCC KDB 789033, clause G.

**3.6.4 Test Setup**

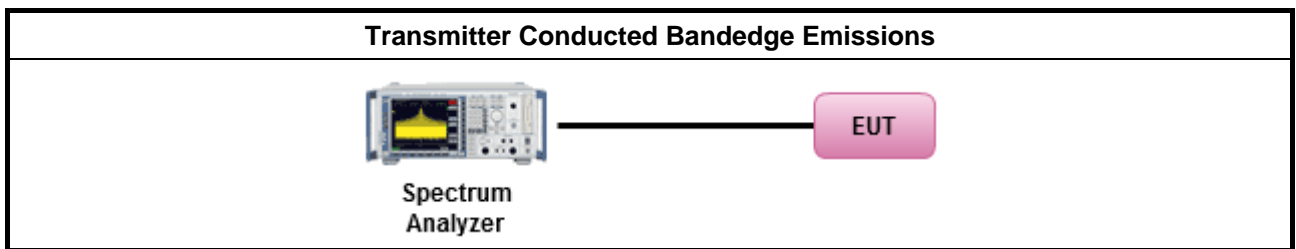

### 3.6.5 Test Result of Transmitter Conducted Bandedge Emissions

#### Transmitter Conducted Bandedge Emissions Result – Average

Freq. (MHz)	Operating Mode	N <sub>Tx</sub>	Correlated Antenna Gain (dBi)	TX1 Bandedge Level (dBm)	TX2 Bandedge Level (dBm)	Total TX Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	1	5.00	-51.07	-	-46.07	-41.25	4.82
	Non HT-20, 6 to 54Mbps	2	5.00	-53.96	-56.05	-46.87	-41.25	5.62
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-53.96	-56.05	-43.86	-41.25	2.61
	HT-20, M0 to M7	1	5.00	-51.14	-	-46.14	-41.25	4.89
	HT-20, M0 to M15	2	5.00	-53.87	-56.02	-46.80	-41.25	5.55
	HT-20, STBC, M0 to M7	2	5.00	-53.84	-54.10	-45.96	-41.25	4.71
	HT-20, Beam Forming, M0 to M7	2	8.01	-53.87	-56.02	-43.79	-41.25	2.54
	HT-20, Beam Forming, M8 to M15	2	5.00	-53.94	-54.85	-46.36	-41.25	5.11
5200	Non HT-20, 6 to 54Mbps	1	5.00	-53.28	-	-48.28	-41.25	7.03
	Non HT-20, 6 to 54Mbps	2	5.00	-53.80	-55.91	-46.72	-41.25	5.47
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-53.80	-55.91	-43.71	-41.25	2.46
	HT-20, M0 to M7	1	5.00	-53.03	-	-48.03	-41.25	6.78
	HT-20, M0 to M15	2	5.00	-53.79	-55.89	-46.70	-41.25	5.45
	HT-20, STBC, M0 to M7	2	5.00	-53.81	-55.92	-46.73	-41.25	5.48
	HT-20, Beam Forming, M0 to M7	2	8.01	-53.79	-55.89	-43.69	-41.25	2.44
	HT-20, Beam Forming, M8 to M15	2	5.00	-53.72	-55.81	-46.63	-41.25	5.38
5240	Non HT-20, 6 to 54Mbps	1	5.00	-53.05	-	-48.05	-41.25	6.80
	Non HT-20, 6 to 54Mbps	2	5.00	-53.95	-56.15	-46.90	-41.25	5.65
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-53.95	-56.15	-43.89	-41.25	2.64
	HT-20, M0 to M15	1	5.00	-53.05	-	-48.05	-41.25	6.80
	HT-20, M0 to M15	2	5.00	-53.88	-55.79	-46.72	-41.25	5.47
	HT-20, STBC, M0 to M7	2	5.00	-54.08	-55.31	-46.64	-41.25	5.39
	HT-20, Beam Forming, M0 to M7	2	8.01	-53.88	-55.59	-43.63	-41.25	2.38
	HT-20, Beam Forming, M8 to M15	2	5.00	-53.93	-56.09	-46.87	-41.25	5.62
5190	HT-40, M0 to M7	1	5.00	-49.87	-	-44.87	-41.25	3.62
	HT-40, M0 to M15	2	5.00	-54.29	-54.34	-46.30	-41.25	5.05
	HT-40, STBC, M0 to M7	2	5.00	-53.87	-54.74	-46.27	-41.25	5.02
	HT-40, Beam Forming, M0 to M7	2	8.01	-54.29	-54.34	-43.29	-41.25	2.04
	HT-40, Beam Forming, M8 to M15	2	5.00	-54.02	-54.89	-46.42	-41.25	5.17
5230	HT-40, M0 to M7	1	5.00	-53.47	-	-48.47	-41.25	7.22
	HT-40, M0 to M15	2	5.00	-53.94	-54.81	-46.34	-41.25	5.09
	HT-40, STBC, M0 to M7	2	5.00	-53.98	-53.52	-45.73	-41.25	4.48
	HT-40, Beam Forming, M0 to M7	2	8.01	-53.94	-54.81	-43.33	-41.25	2.08
	HT-40, Beam Forming, M8 to M15	2	5.00	-54.08	-55.07	-46.54	-41.25	5.29




Transmitter Conducted Bandedge Emissions Result – Peak

Freq. (MHz)	Operating Mode	N <sub>TX</sub>	Correlated Antenna Gain (dBi)	TX1 Bandedge Level (dBm)	TX2 Bandedge Level (dBm)	Total TX Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	1	5.00	-33.05	-	-28.05	-21.25	6.80
	Non HT-20, 6 to 54Mbps	2	5.00	-36.37	-44.03	-30.68	-21.25	9.43
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-36.37	-44.03	-27.67	-21.25	6.42
	HT-20, M0 to M7	1	5.00	-32.75	-	-27.75	-21.25	6.50
	HT-20, M0 to M15	2	5.00	-36.55	-44.08	-30.84	-21.25	9.59
	HT-20, STBC, M0 to M7	2	5.00	-37.52	-43.37	-31.52	-21.25	10.27
	HT-20, Beam Forming, M0 to M7	2	8.01	-36.55	-44.08	-27.83	-21.25	6.58
	HT-20, Beam Forming, M8 to M15	2	5.00	-37.21	-44.32	-31.44	-21.25	10.19
5200	Non HT-20, 6 to 54Mbps	1	5.00	-36.16	-	-31.16	-21.25	9.91
	Non HT-20, 6 to 54Mbps	2	5.00	-37.17	-44.90	-31.49	-21.25	10.24
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-37.17	-44.90	-28.48	-21.25	7.23
	HT-20, M0 to M7	1	5.00	-36.17	-	-31.17	-21.25	9.92
	HT-20, M0 to M15	2	5.00	-37.18	-43.74	-31.31	-21.25	10.06
	HT-20, STBC, M0 to M7	2	5.00	-37.33	-44.73	-31.60	-21.25	10.35
	HT-20, Beam Forming, M0 to M7	2	8.01	-37.18	-43.74	-28.30	-21.25	7.05
	HT-20, Beam Forming, M8 to M15	2	5.00	-36.95	-43.84	-31.14	-21.25	9.89
5240	Non HT-20, 6 to 54Mbps	1	5.00	-36.40	-	-31.40	-21.25	10.15
	Non HT-20, 6 to 54Mbps	2	5.00	-35.50	-45.29	-30.07	-21.25	8.82
	Non HT-20, Beam Forming, 6 to 54Mbps	2	8.01	-35.50	-45.29	-27.06	-21.25	5.81
	HT-20, M0 to M15	1	5.00	-36.06	-	-31.06	-21.25	9.81
	HT-20, M0 to M15	2	5.00	-37.12	-44.70	-31.42	-21.25	10.17
	HT-20, STBC, M0 to M7	2	5.00	-36.50	-43.66	-30.74	-21.25	9.49
	HT-20, Beam Forming, M0 to M7	2	8.01	-37.12	-44.70	-28.41	-21.25	7.16
	HT-20, Beam Forming, M8 to M15	2	5.00	-36.74	-42.60	-30.74	-21.25	9.49
5190	HT-40, M0 to M7	1	5.00	-33.75	-	-28.75	-21.25	7.50
	HT-40, M0 to M15	2	5.00	-36.20	-41.48	-30.07	-21.25	8.82
	HT-40, STBC, M0 to M7	2	5.00	-36.98	-42.66	-30.94	-21.25	9.69
	HT-40, Beam Forming, M0 to M7	2	8.01	-36.20	-41.48	-27.06	-21.25	5.81
	HT-40, Beam Forming, M8 to M15	2	5.00	-36.69	-43.52	-30.87	-21.25	9.62
5230	HT-40, M0 to M7	1	5.00	-35.58	-	-30.58	-21.25	9.33
	HT-40, M0 to M15	2	5.00	-36.83	-44.34	-31.12	-21.25	9.87
	HT-40, STBC, M0 to M7	2	5.00	-36.02	-43.60	-30.32	-21.25	9.07
	HT-40, Beam Forming, M0 to M7	2	8.01	-36.83	-44.34	-28.11	-21.25	6.86
	HT-40, Beam Forming, M8 to M15	2	5.00	-36.90	-44.29	-31.17	-21.25	9.92



Transmitter Conducted Bandedge Emissions Plot-Average on 5180 MHz, Non HT-20, 6Mbps

Tx1

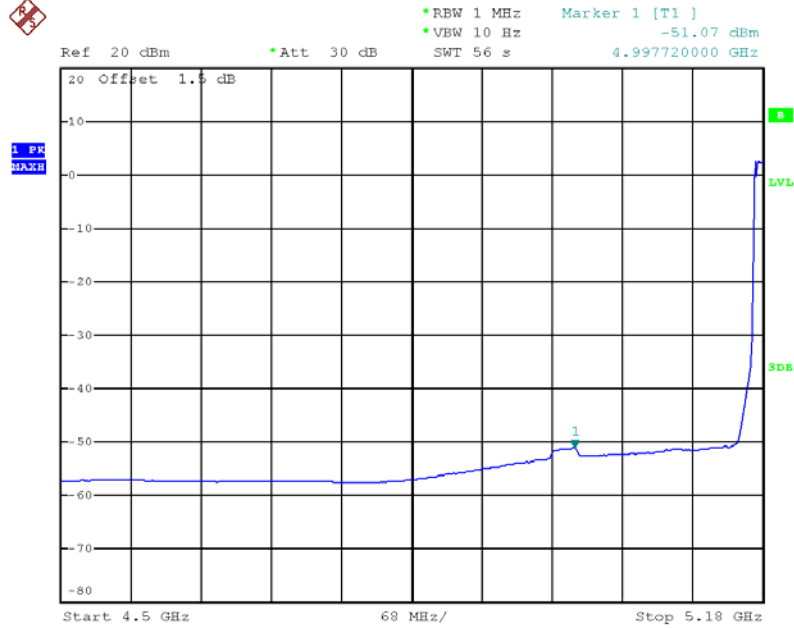


Date: 25.OCT.2012 11:41:27




Transmitter Conducted Bandedge Emissions Plot--Average on 5180 MHz,  
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

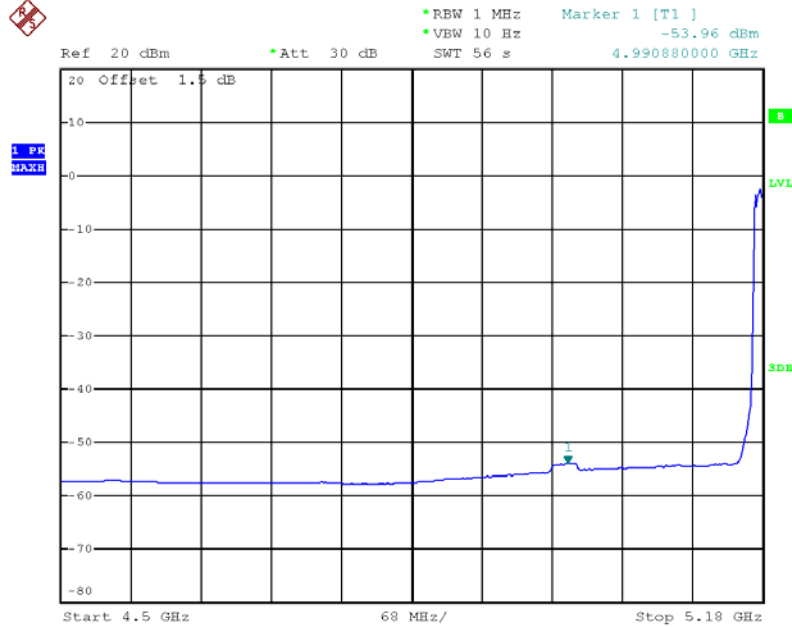

Date: 25.OCT.2012 14:34:29

Tx2

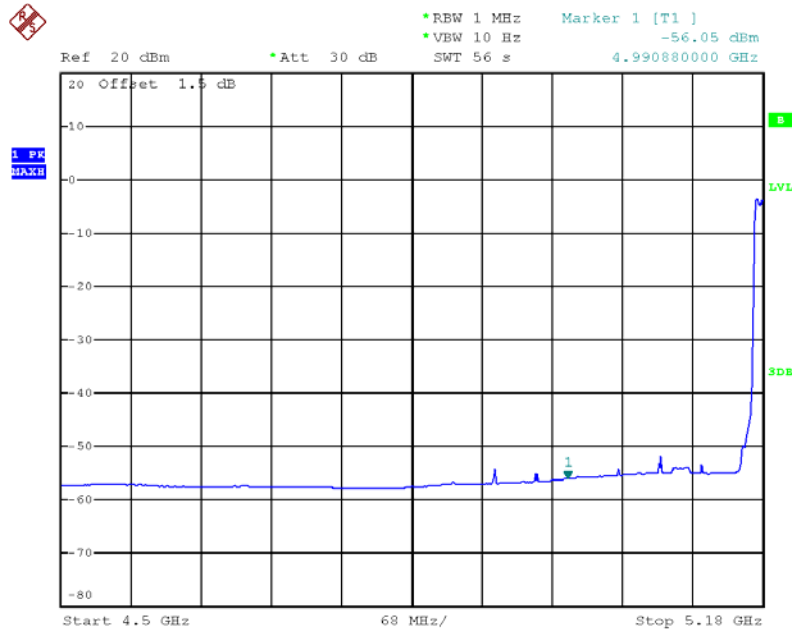


Date: 25.OCT.2012 14:35:24



Transmitter Conducted Bandedge Emissions Plot-Average on 5180 MHz, HT-20, M0

Tx1

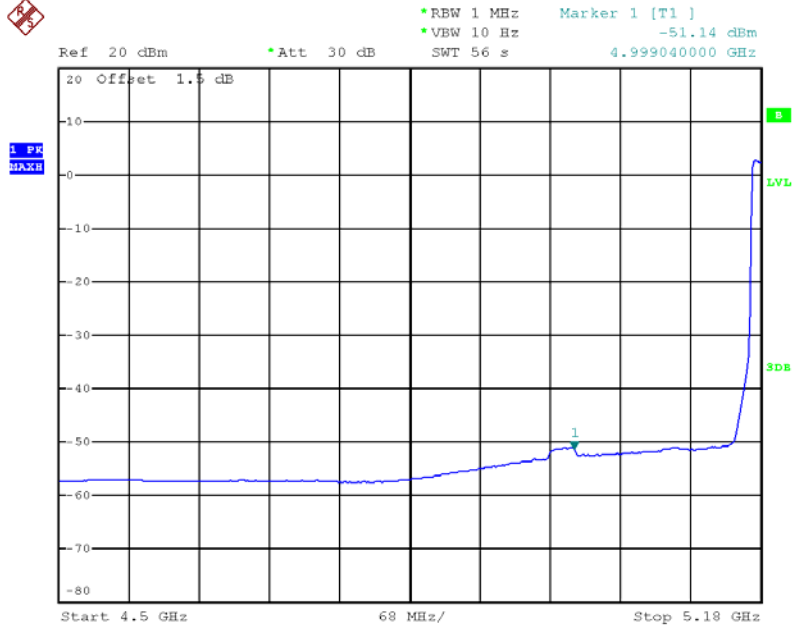


Date: 25.OCT.2012 11:33:15




Transmitter Conducted Bandedge Emissions Plot--Average on 5180 MHz,  
HT-20 / HT-20, Beam Forming, M0

Tx1

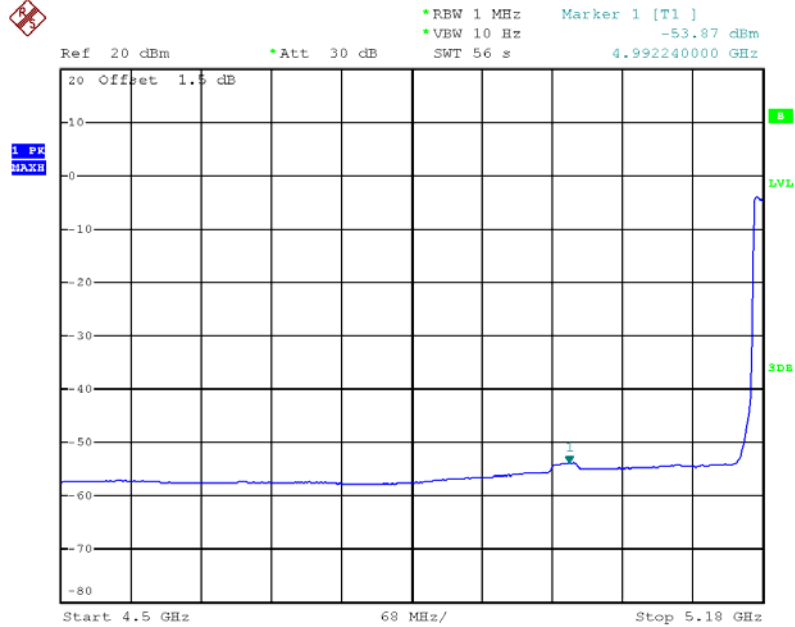

Date: 25.OCT.2012 14:37:35

Tx2

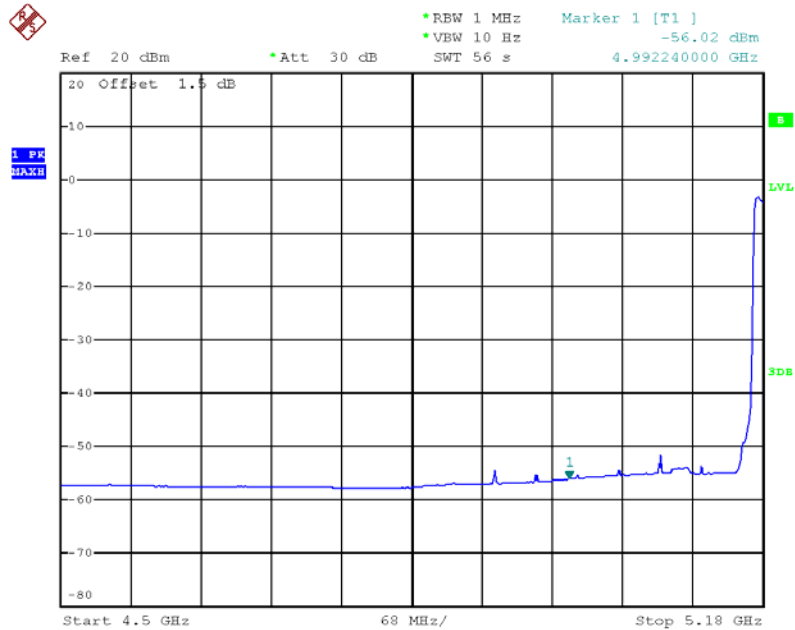


Date: 25.OCT.2012 14:38:07






Transmitter Conducted Bandedge Emissions Plot-Average on 5180 MHz, HT-20, STBC, M0

Tx1

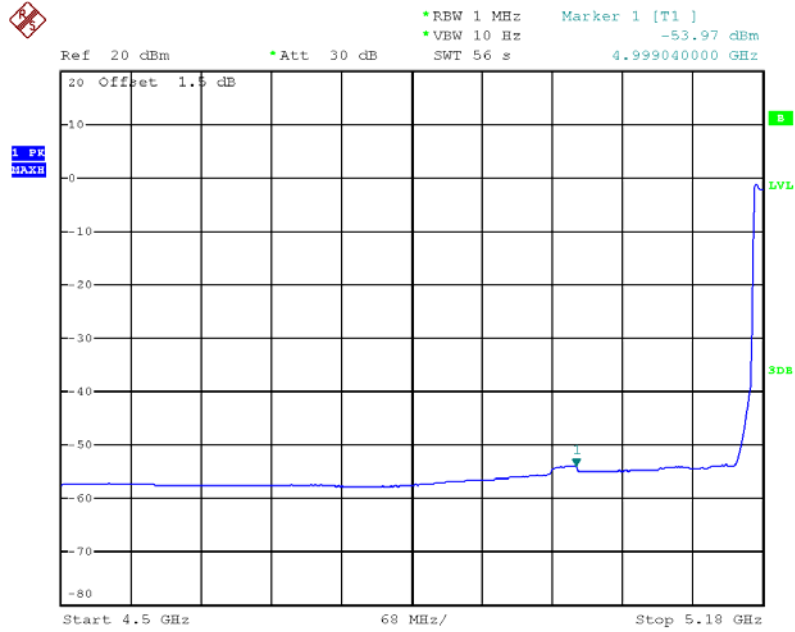

Date: 25.OCT.2012 14:40:27

Tx2

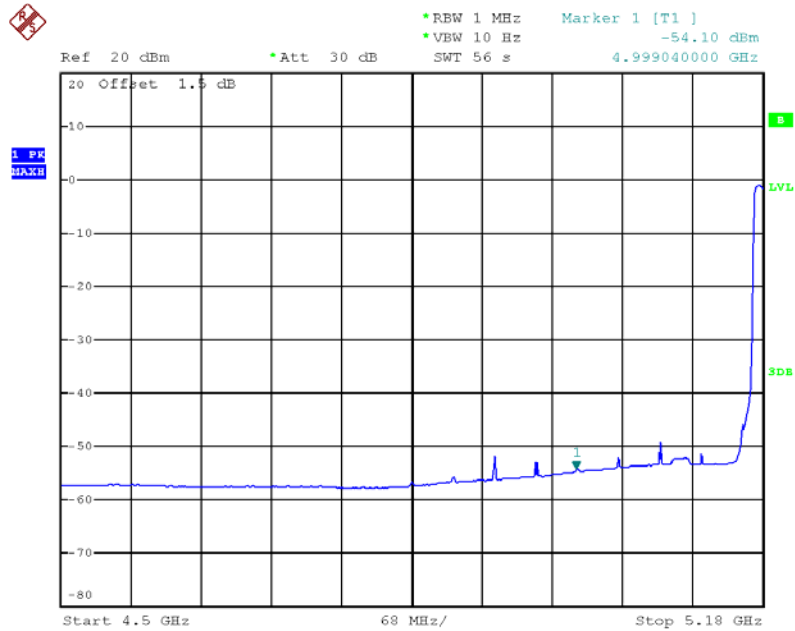


Date: 25.OCT.2012 14:41:01




Transmitter Conducted Bandedge Emissions Plot--Average on 5180 MHz, HT-20, Beam Forming, M8

Tx1

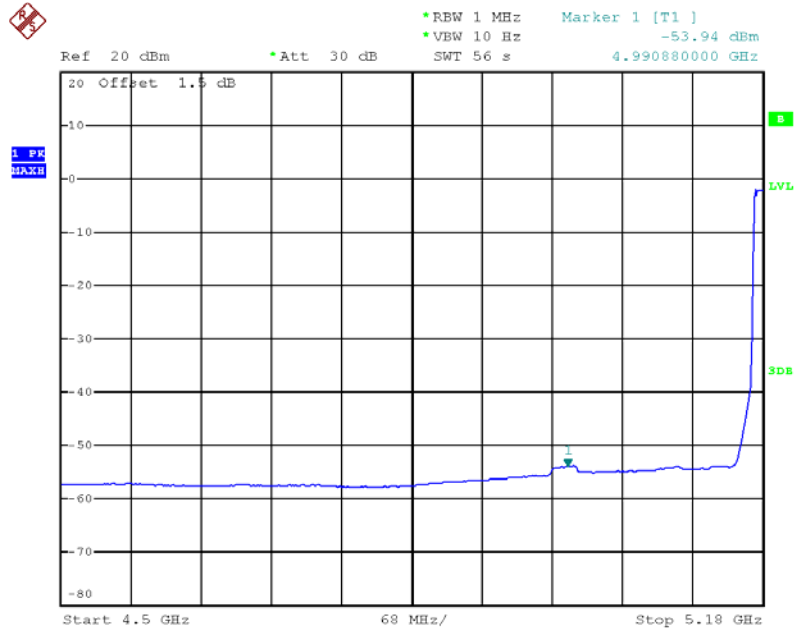

Date: 25.OCT.2012 14:43:09

Tx2

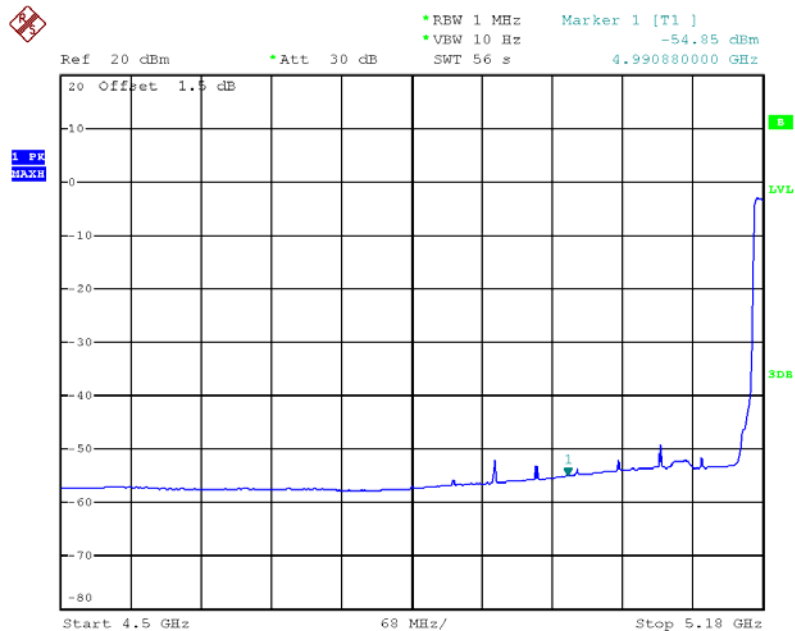


Date: 25.OCT.2012 14:43:45



Transmitter Conducted Bandedge Emissions Plot-Average on 5200 MHz, Non HT-20, 6Mbps

Tx1

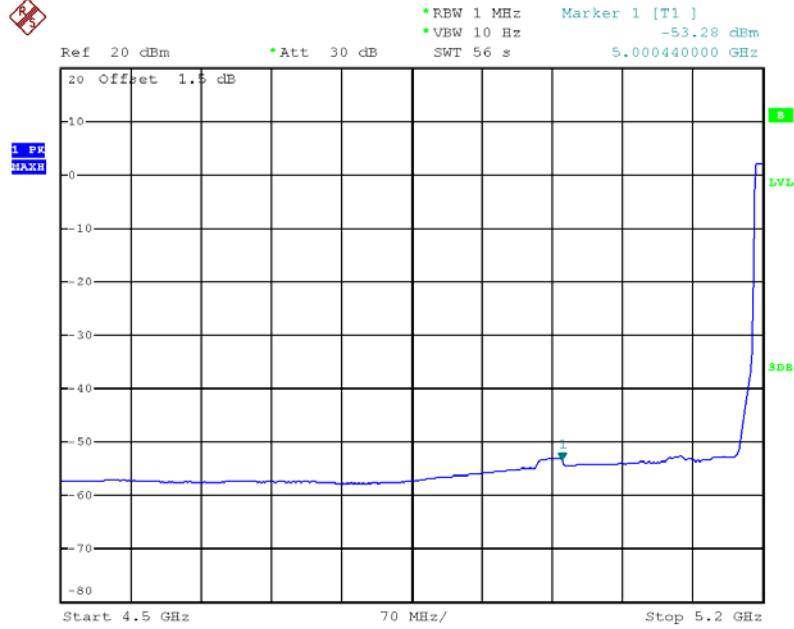


Date: 25.OCT.2012 11:40:38




Transmitter Conducted Bandedge Emissions Plot--Average on 5200 MHz,  
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

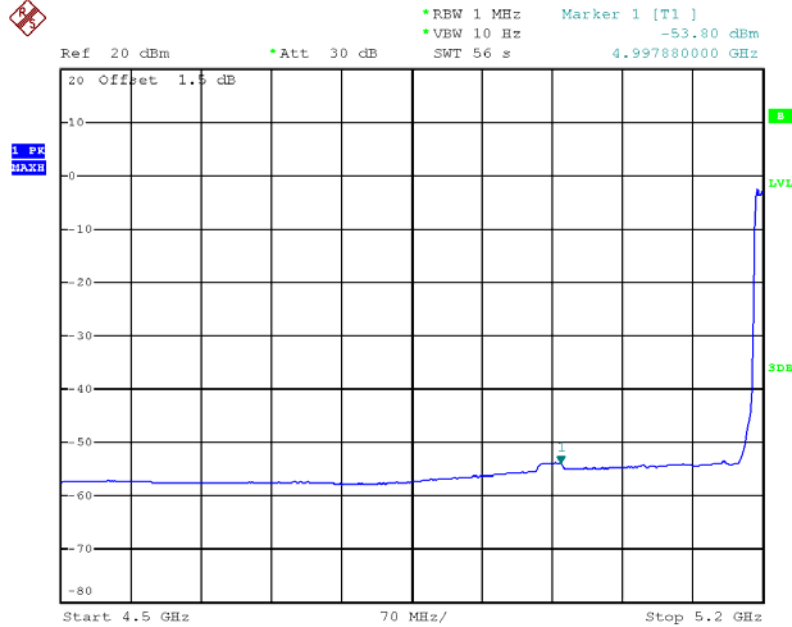

Date: 25.OCT.2012 14:45:25

Tx2

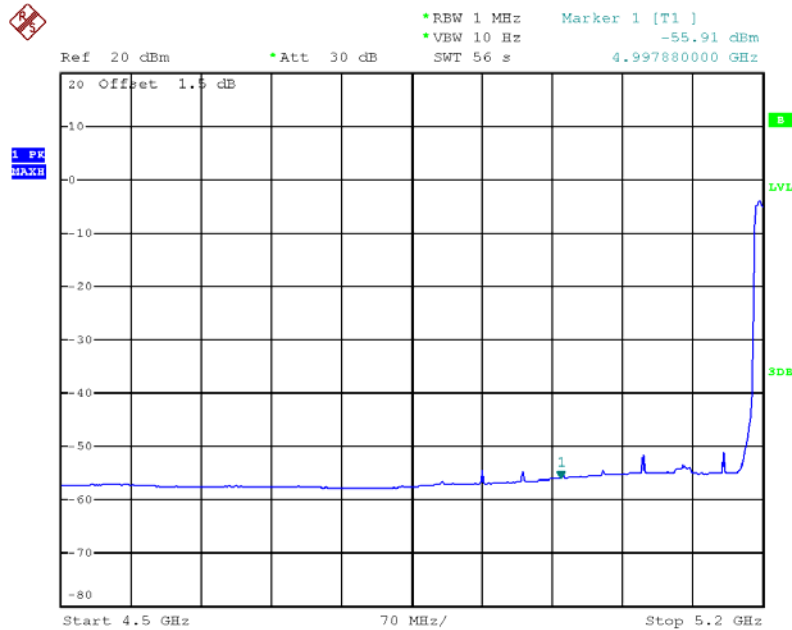


Date: 25.OCT.2012 14:46:15



Transmitter Conducted Bandedge Emissions Plot-Average on 5200 MHz, HT-20, M0

Tx1

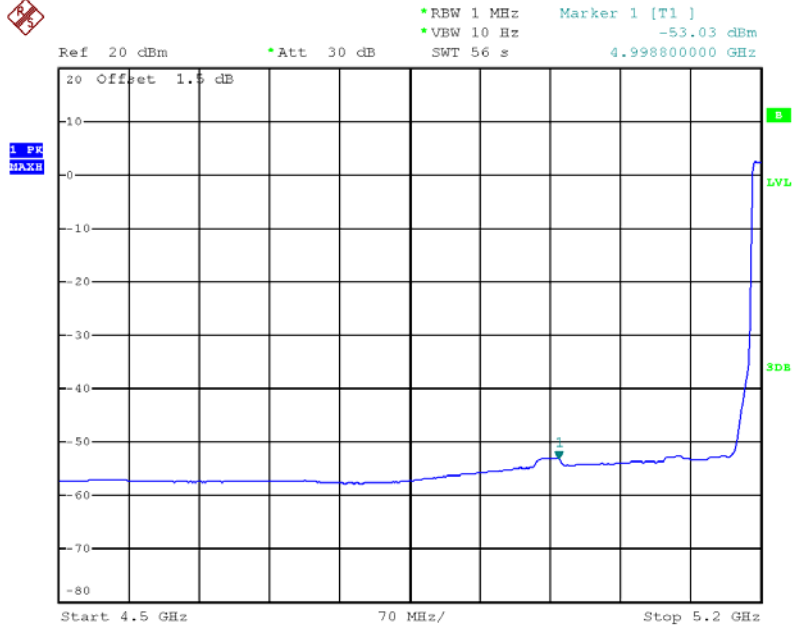


Date: 25.OCT.2012 11:35:47




Transmitter Conducted Bandedge Emissions Plot-Average on 5200 MHz,  
HT-20 / HT-20, Beam Forming, M0

Tx1

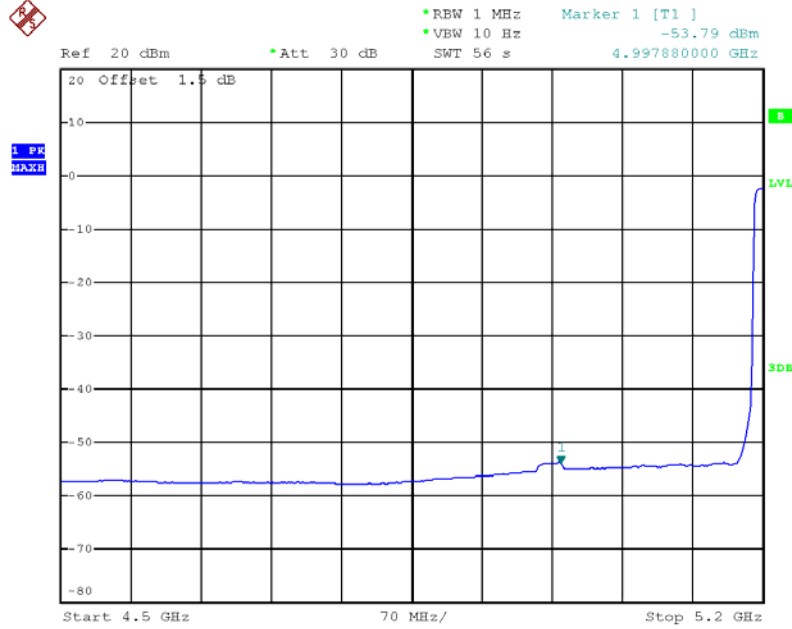

Date: 25.OCT.2012 14:47:29

Tx2

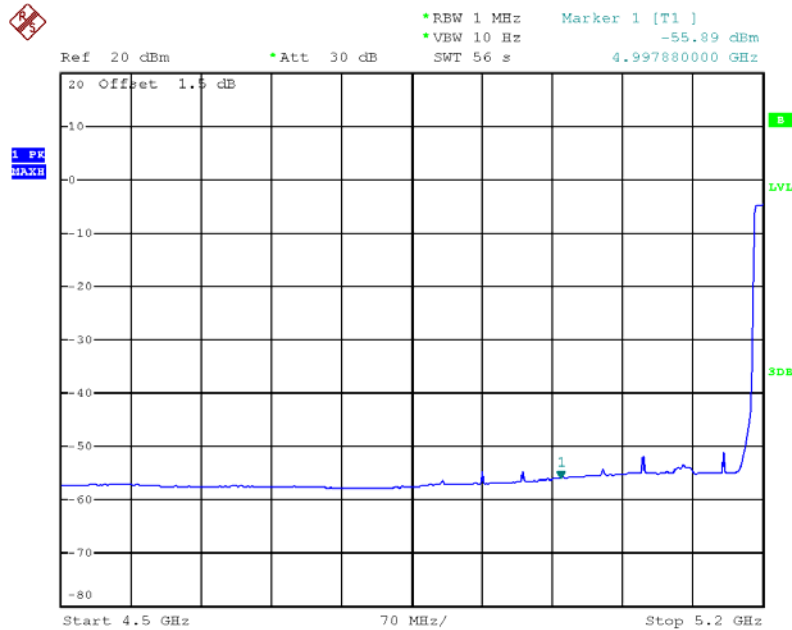


Date: 25.OCT.2012 14:48:01




Transmitter Conducted Bandedge Emissions Plot-Average on 5200 MHz, HT-20, STBC, M0

Tx1

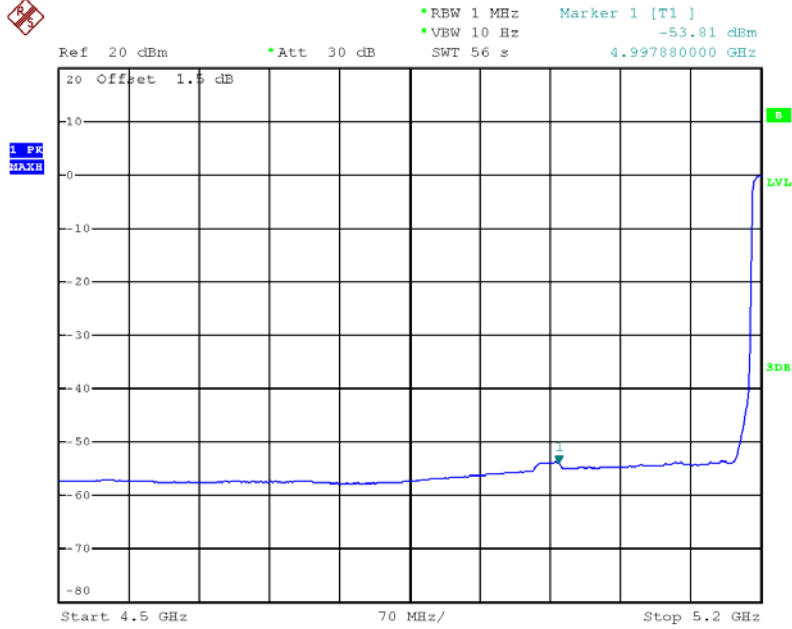

Date: 25.OCT.2012 14:51:13

Tx2

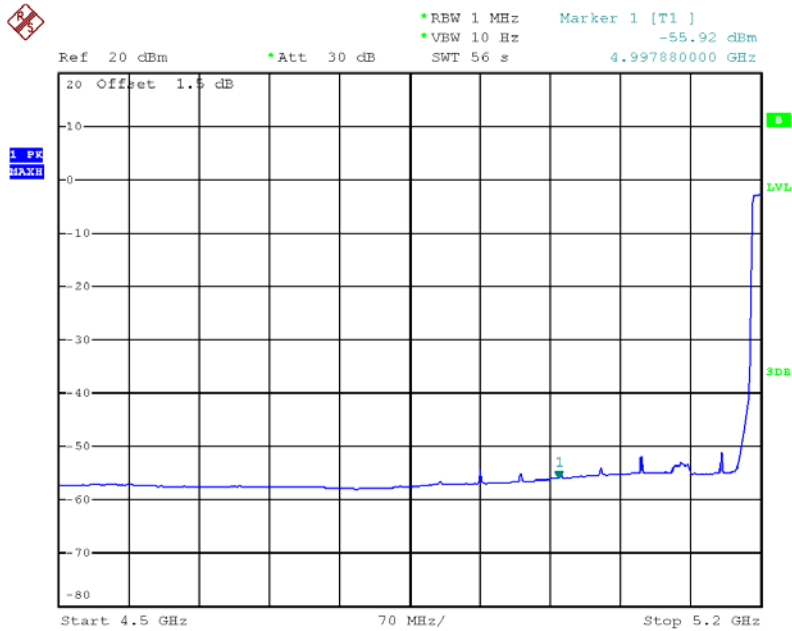


Date: 25.OCT.2012 14:51:40




Transmitter Conducted Bandedge Emissions Plot--Average on 5200 MHz, HT-20, Beam Forming, M8

Tx1

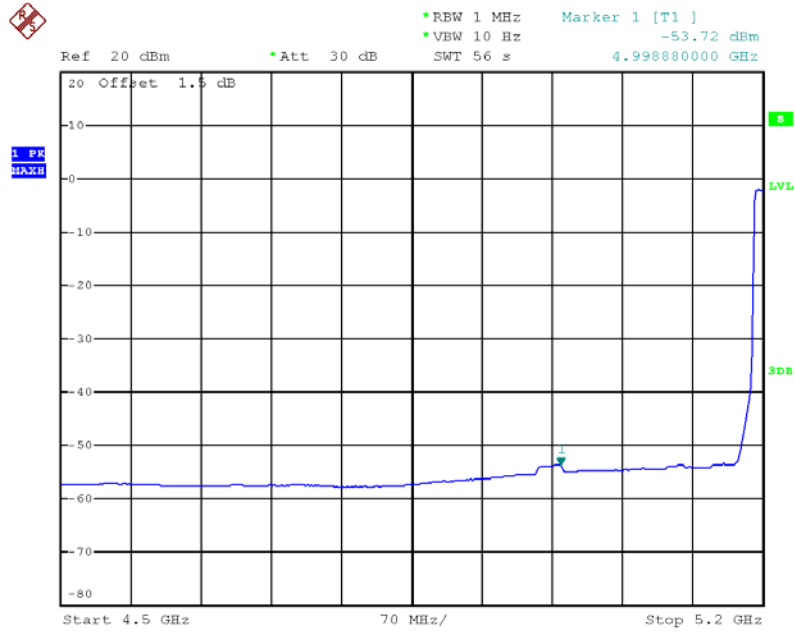

Date: 25.OCT.2012 15:42:40

Tx2

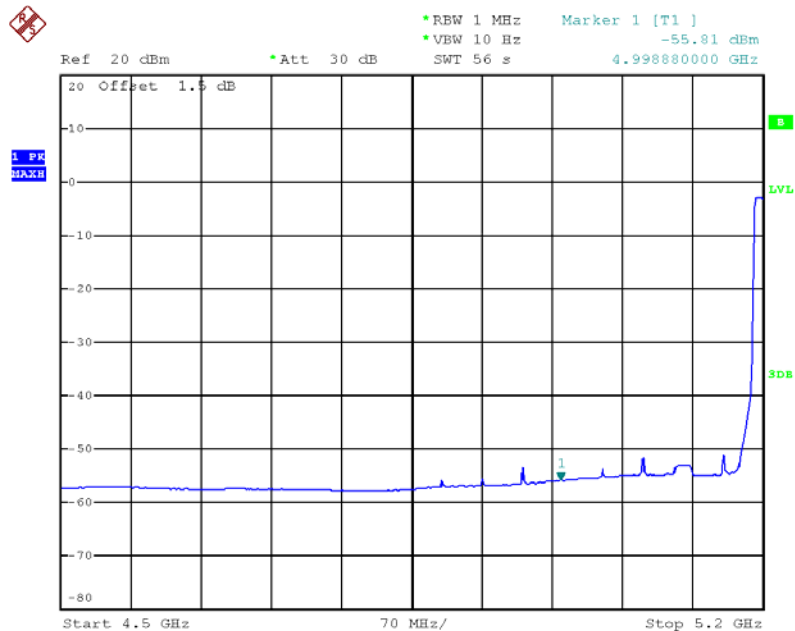


Date: 25.OCT.2012 15:43:03





Transmitter Conducted Bandedge Emissions Plot--Average on 5240 MHz, Non HT-20, 6Mbps

Tx1

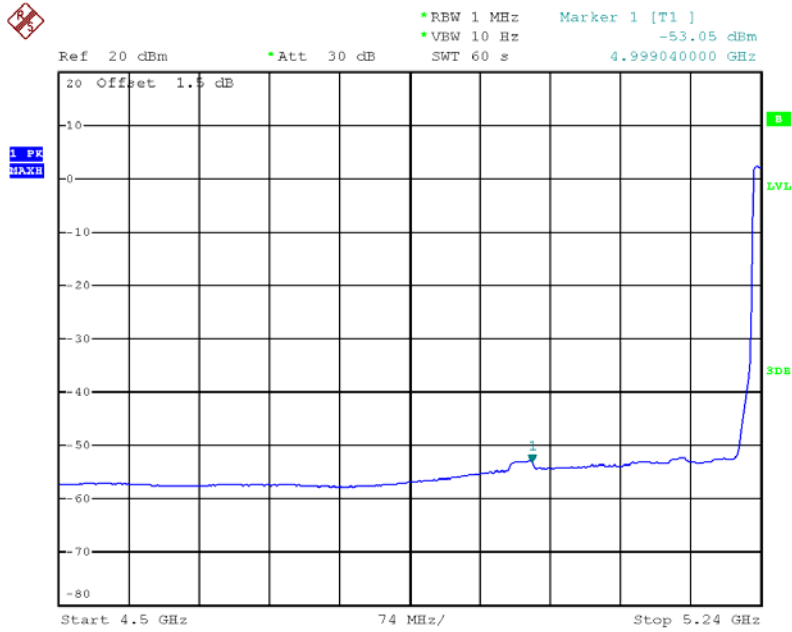


Date: 25.OCT.2012 11:39:41




Transmitter Conducted Bandedge Emissions Plot--Average on 5240 MHz,  
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

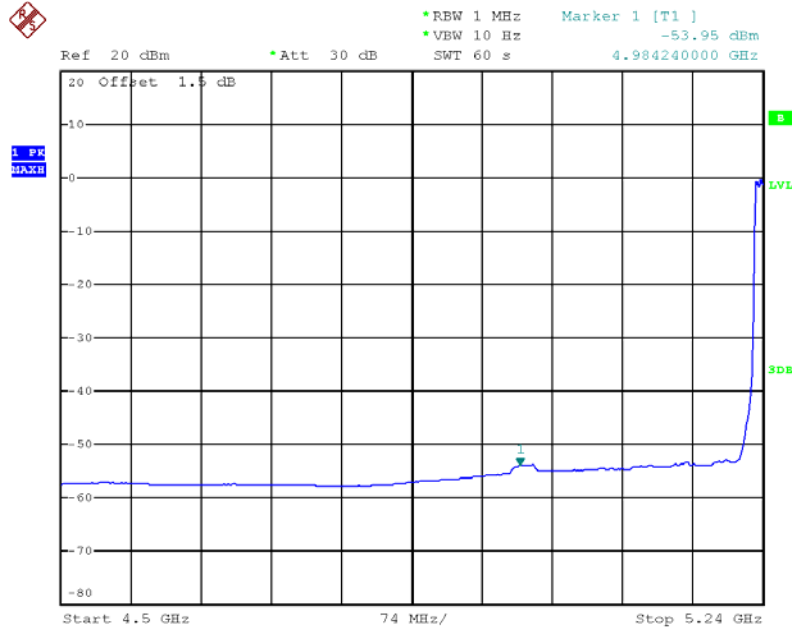

Date: 25.OCT.2012 17:46:50

Tx2

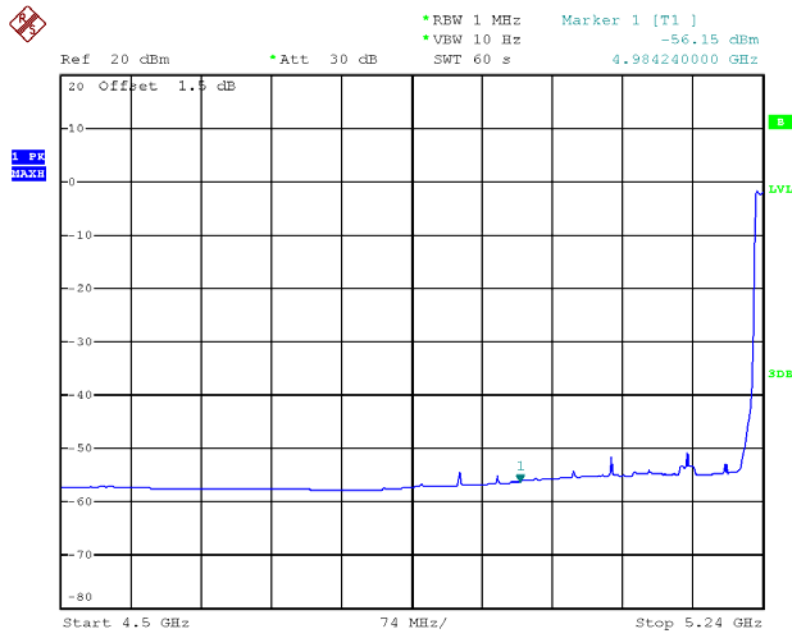


Date: 25.OCT.2012 17:47:33



Transmitter Conducted Bandedge Emissions Plot-Average on 5240 MHz, HT-20, M0

Tx1

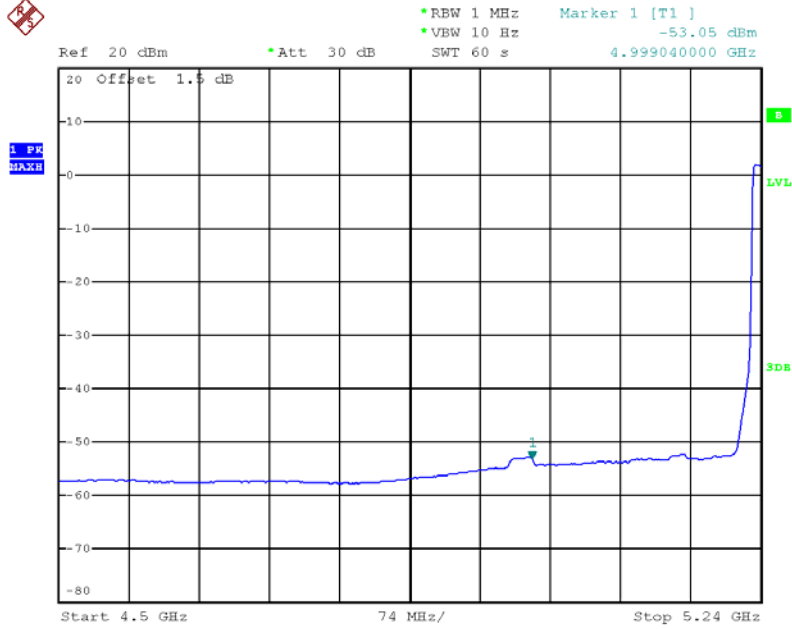


Date: 25.OCT.2012 11:37:33




Transmitter Conducted Bandedge Emissions Plot–Average on 5240 MHz,  
HT-20 / HT-20, Beam Forming, M0

Tx1

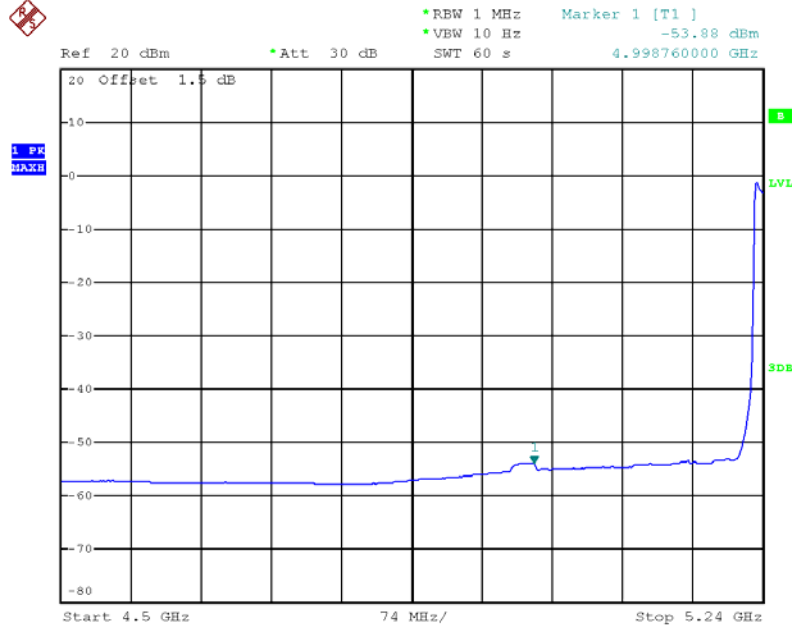

Date: 25.OCT.2012 17:48:20

Tx2

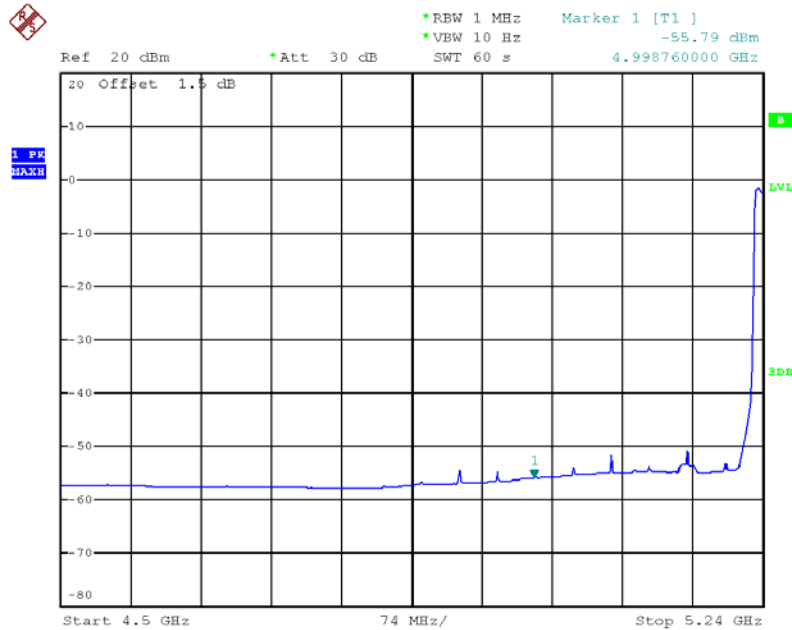


Date: 25.OCT.2012 17:49:08




Transmitter Conducted Bandedge Emissions Plot-Average on 5240 MHz, HT-20, STBC, M0

Tx1

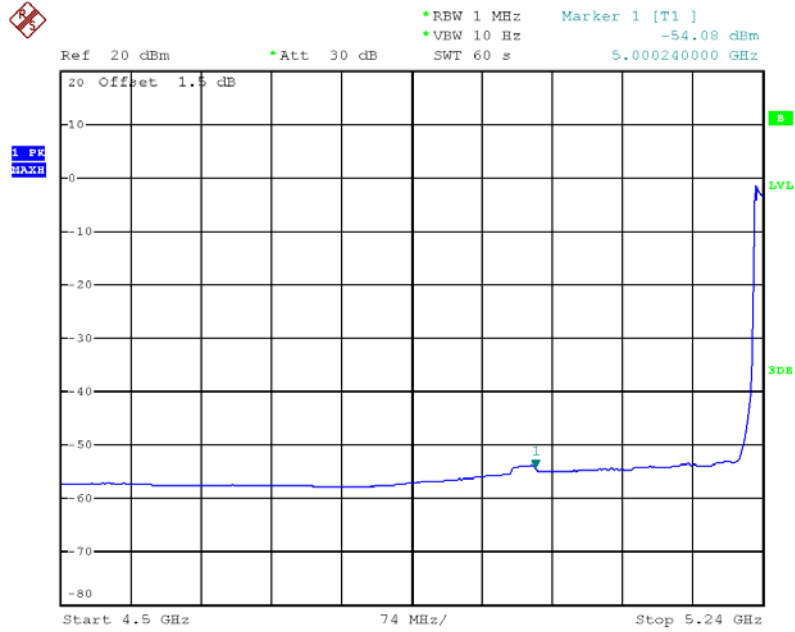

Date: 25.OCT.2012 17:50:17

Tx2

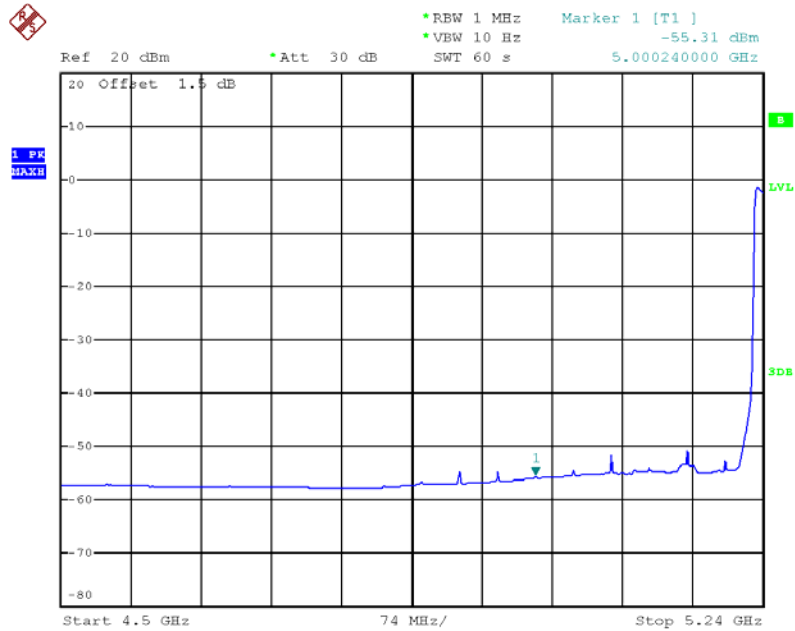


Date: 25.OCT.2012 17:51:00




Transmitter Conducted Bandedge Emissions Plot--Average on 5240 MHz, HT-20, Beam Forming, M8

Tx1

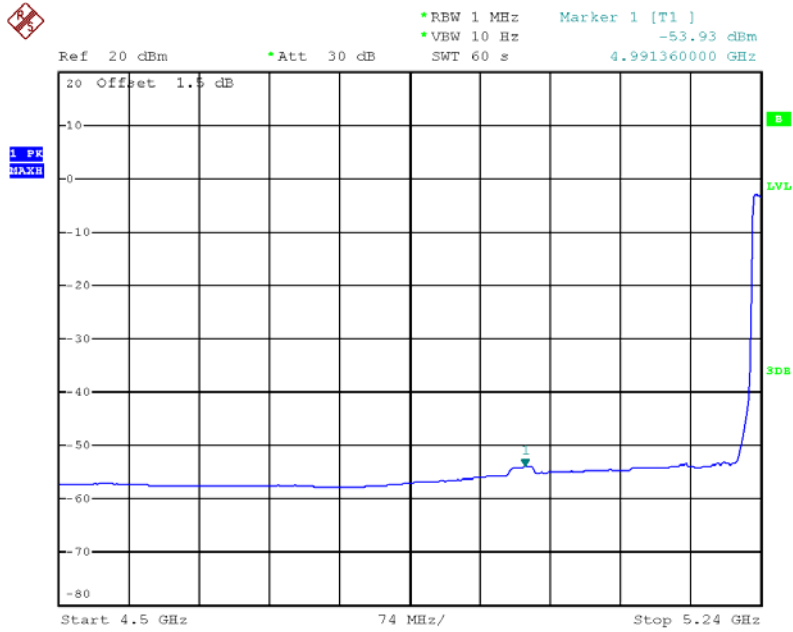

Date: 25.OCT.2012 17:44:34

Tx2

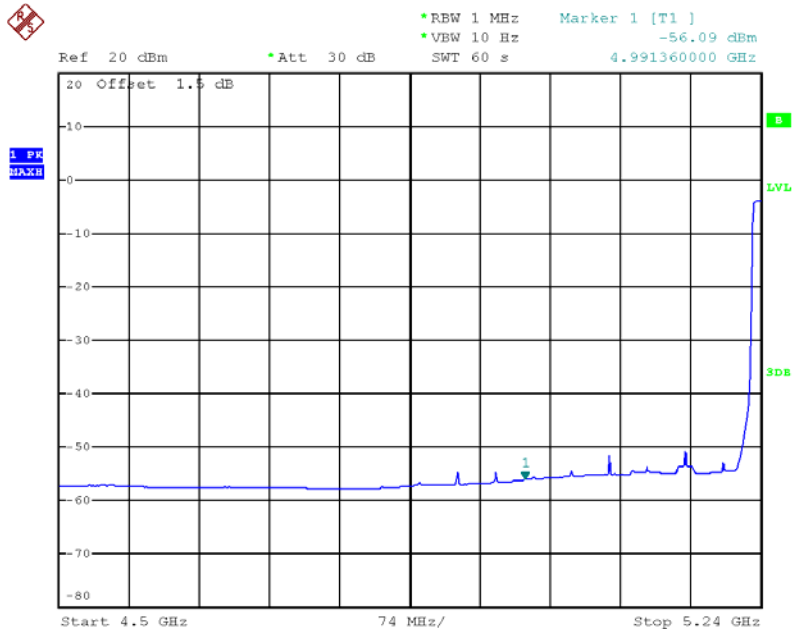


Date: 25.OCT.2012 17:45:19



Transmitter Conducted Bandedge Emissions Plot-Average on 5190 MHz, HT-40, M0

Tx1

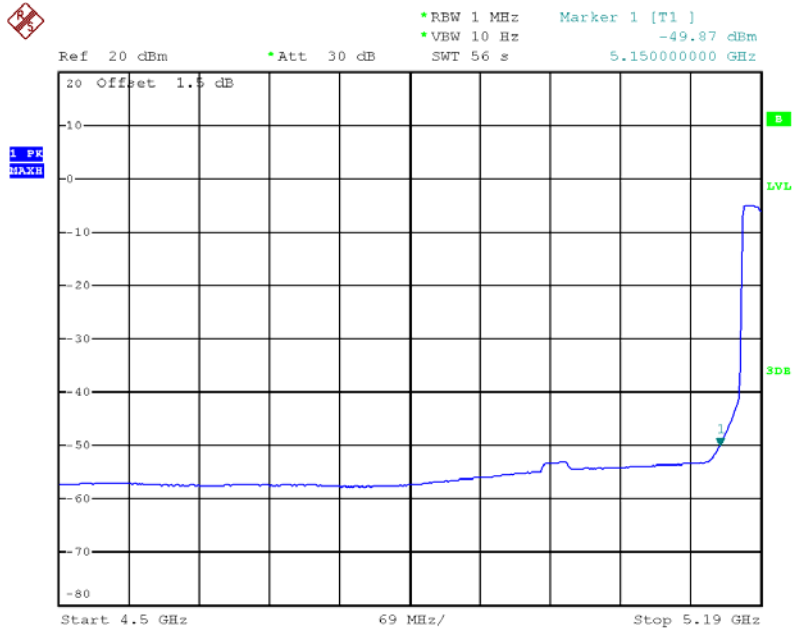


Date: 25.OCT.2012 11:26:49




Transmitter Conducted Bandedge Emissions Plot--Average on 5190 MHz,  
HT-40 / HT-40, Beam Forming, M0

Tx1

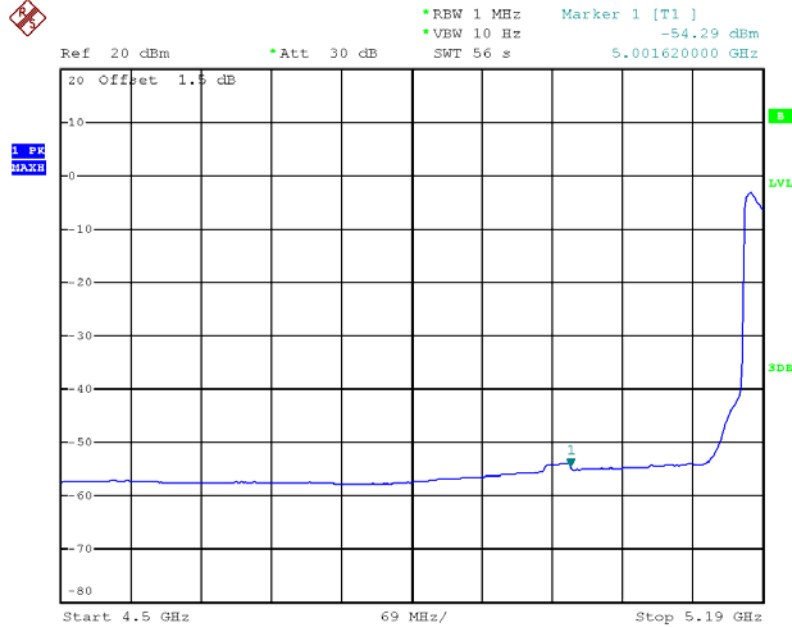

Date: 25.OCT.2012 17:58:25

Tx2

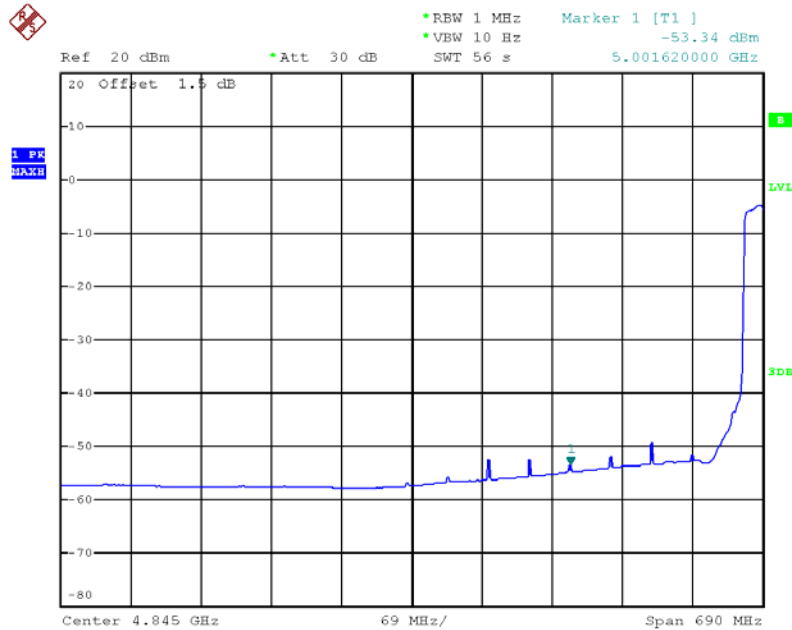


Date: 25.OCT.2012 17:59:07






Transmitter Conducted Bandedge Emissions Plot-Average on 5190 MHz, HT-40, STBC, M0

Tx1

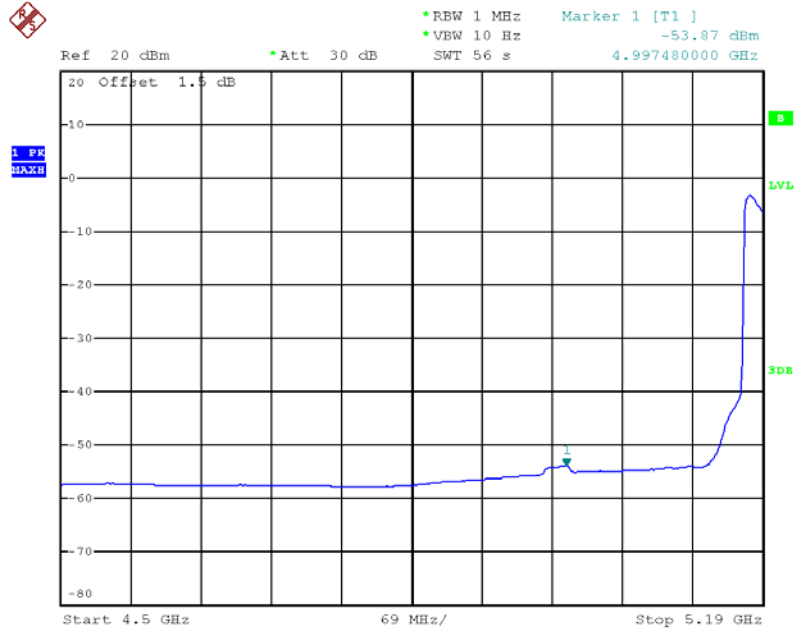

Date: 25.OCT.2012 17:57:00

Tx2

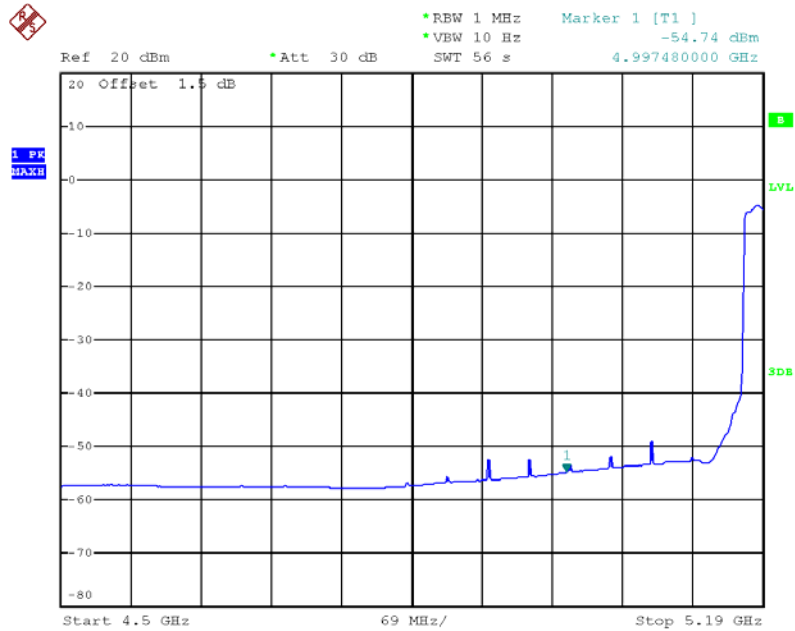


Date: 25.OCT.2012 17:57:43




Transmitter Conducted Bandedge Emissions Plot--Average on 5190 MHz, HT-40, Beam Forming, M8

Tx1

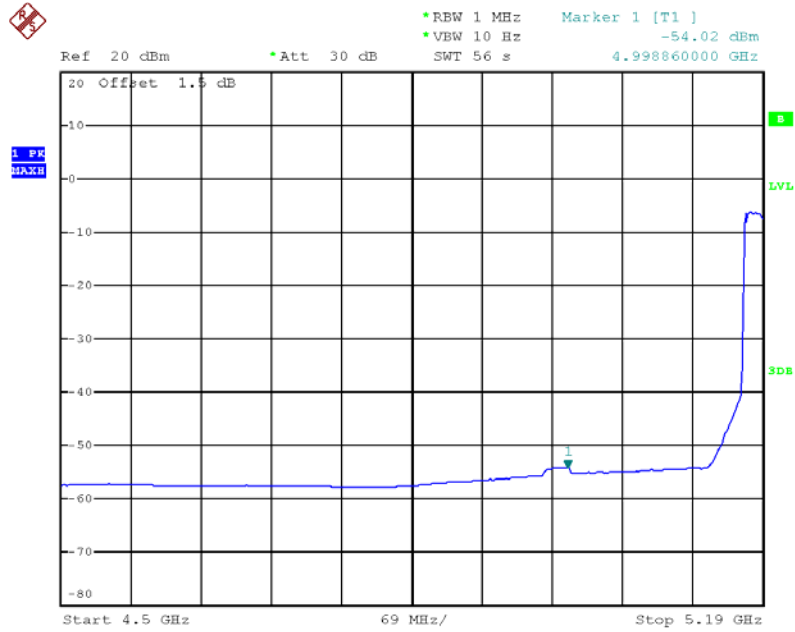

Date: 25.OCT.2012 17:55:24

Tx2

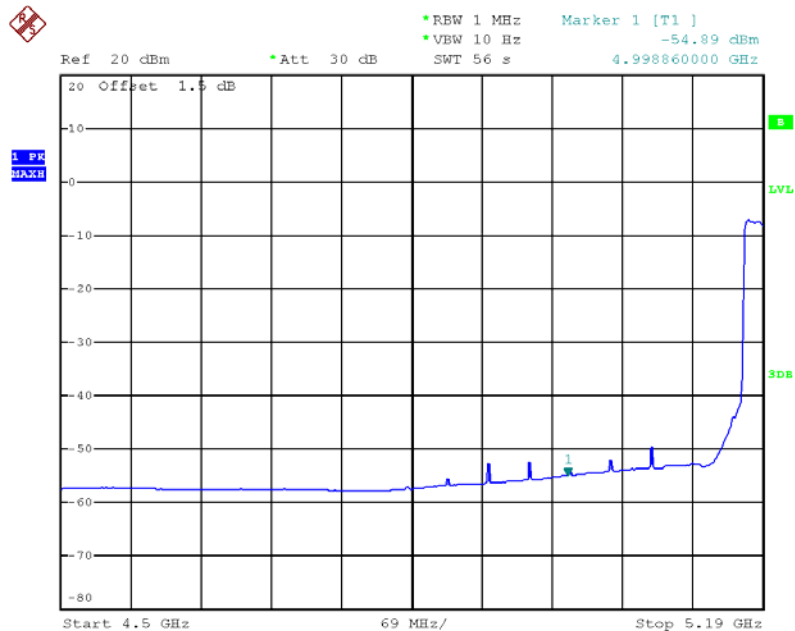


Date: 25.OCT.2012 17:56:06



Transmitter Conducted Bandedge Emissions Plot-Average on 5230 MHz, HT-40, M0

Tx1

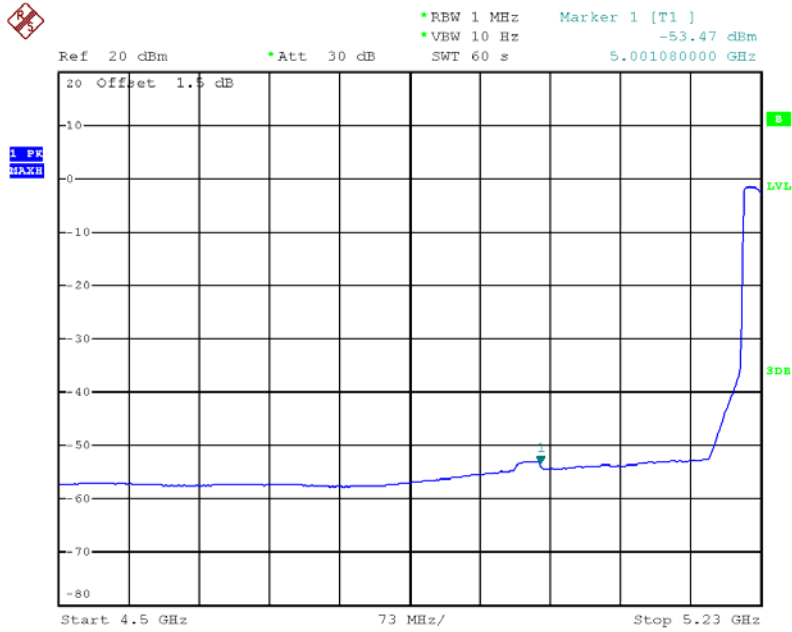


Date: 25.OCT.2012 11:29:27




Transmitter Conducted Bandedge Emissions Plot-Average on 5230 MHz,  
HT-40 / HT-40, Beam Forming, M0

Tx1

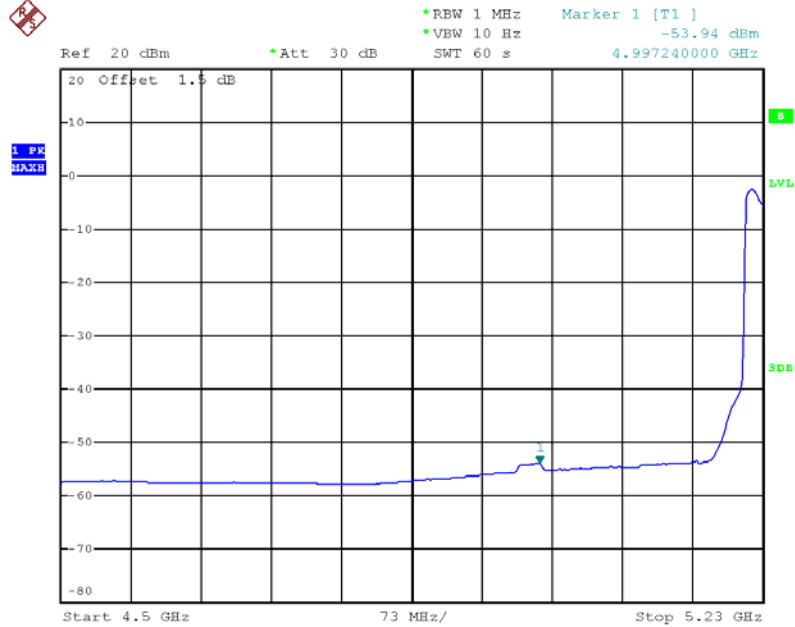

Date: 25.OCT.2012 18:06:56

Tx2

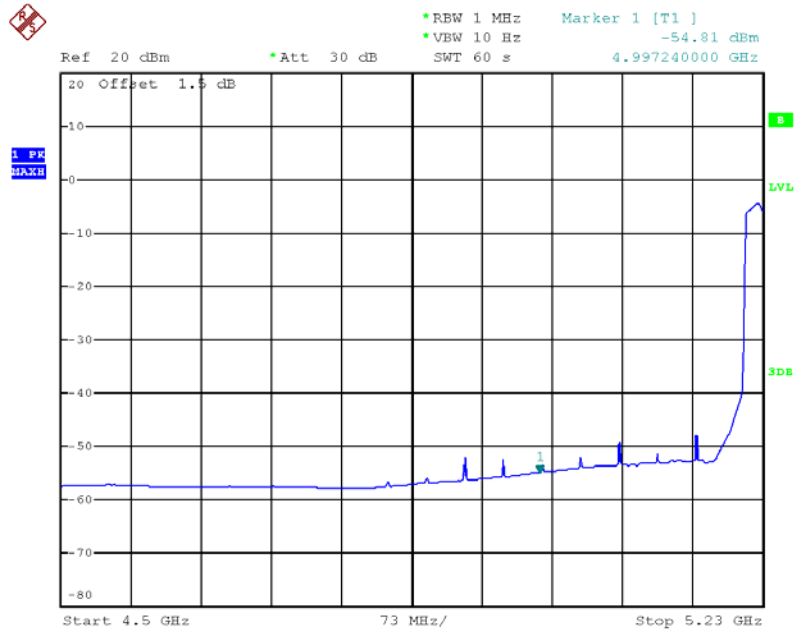


Date: 25.OCT.2012 18:06:16




Transmitter Conducted Bandedge Emissions Plot-Average on 5230 MHz, HT-40, STBC, M0

Tx1

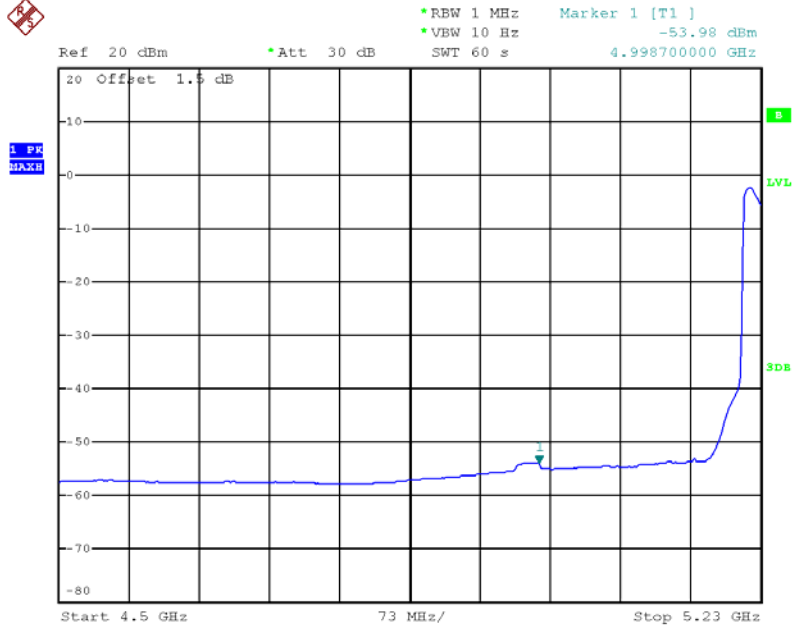

Date: 25.OCT.2012 18:04:56

Tx2

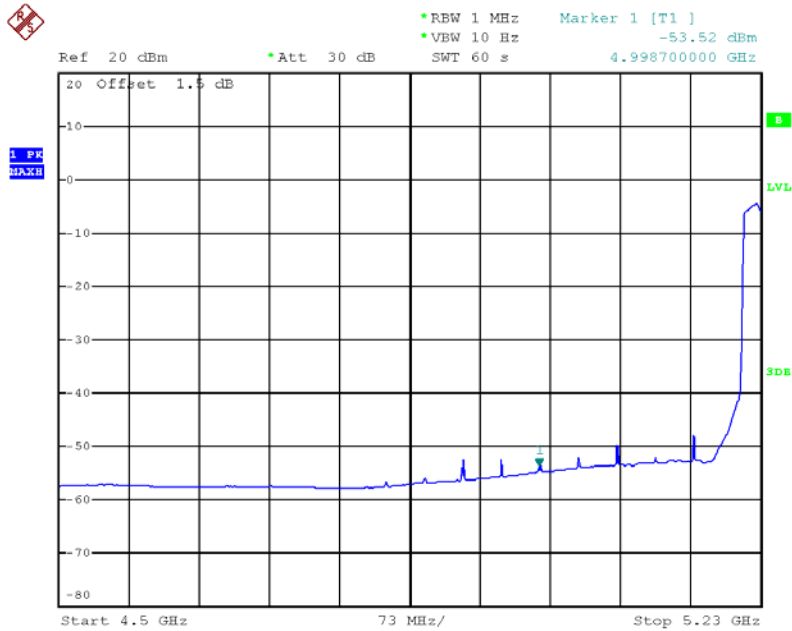


Date: 25.OCT.2012 18:05:33




Transmitter Conducted Bandedge Emissions Plot--Average on 5230 MHz, HT-40, Beam Forming, M8

Tx1

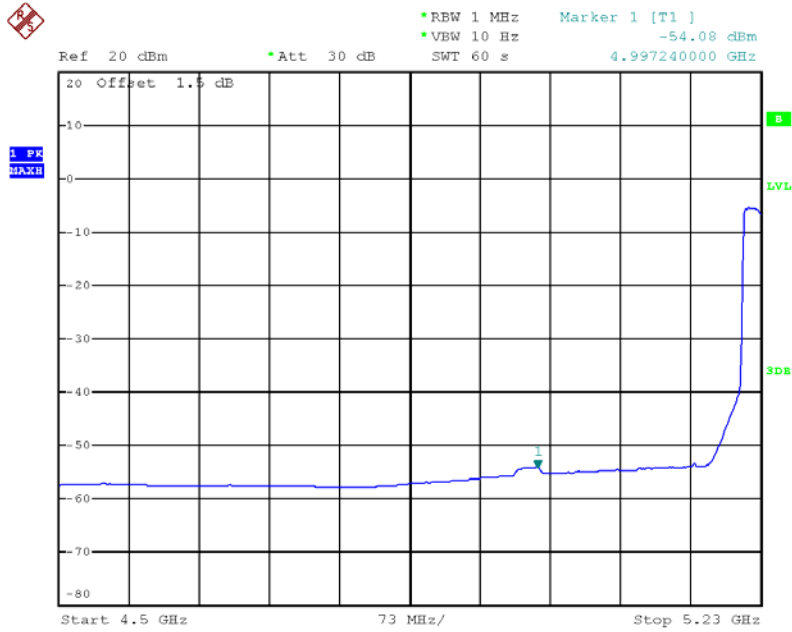

Date: 25.OCT.2012 18:03:41

Tx2

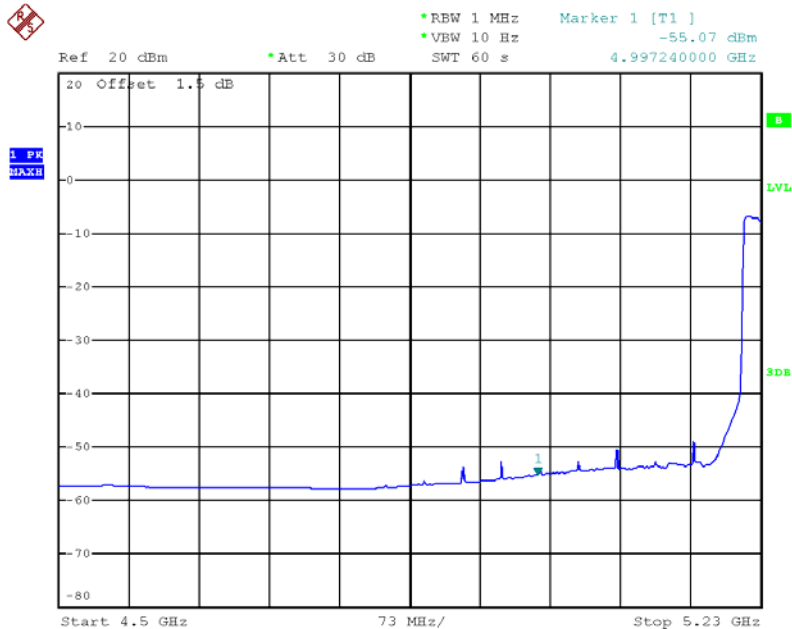


Date: 25.OCT.2012 18:03:00



Transmitter Conducted Bandedge Emissions Plot—Peak on 5180 MHz, Non HT-20, 6Mbps

Tx1

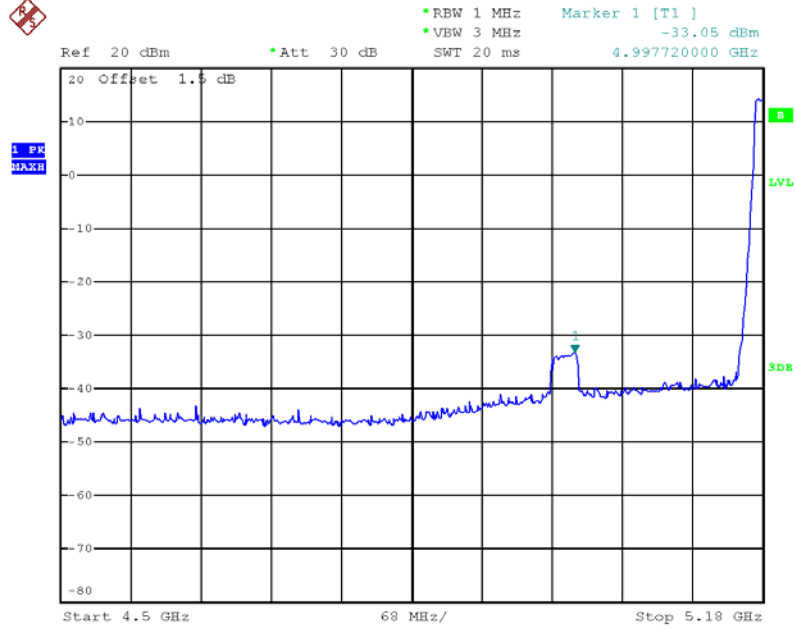


Date: 25.OCT.2012 11:41:12




Transmitter Conducted Bandedge Emissions Plot—Peak on 5180 MHz,  
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

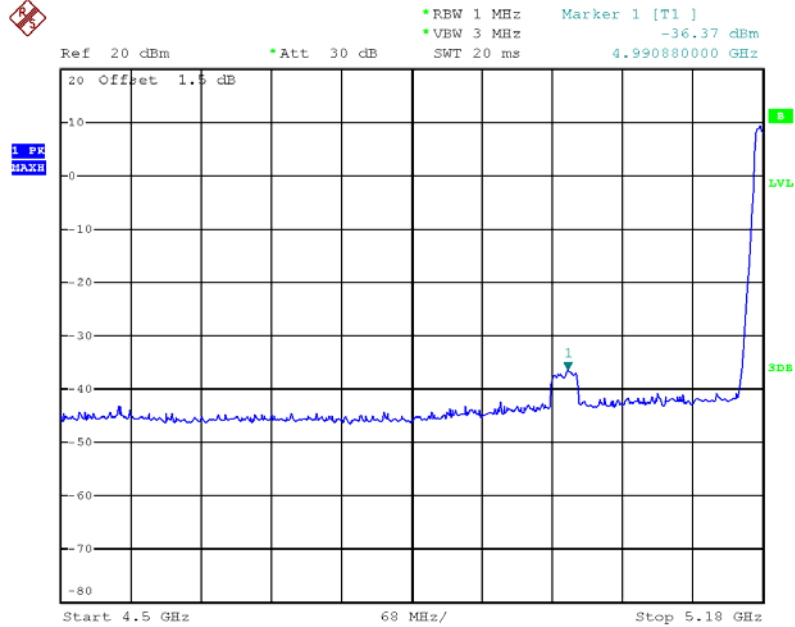

Date: 25.OCT.2012 14:33:50

Tx2

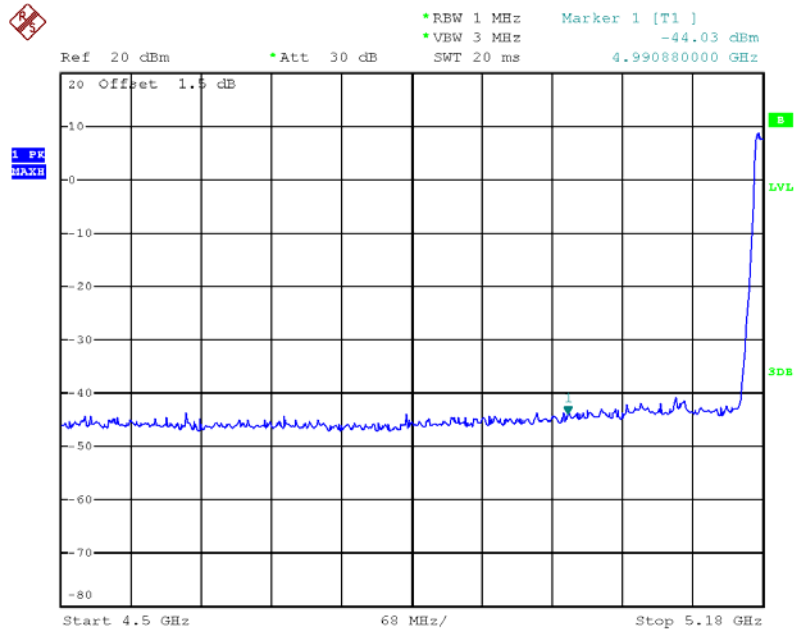


Date: 25.OCT.2012 14:35:48





Transmitter Conducted Bandedge Emissions Plot—Peak on 5180 MHz, HT-20, M0

Tx1

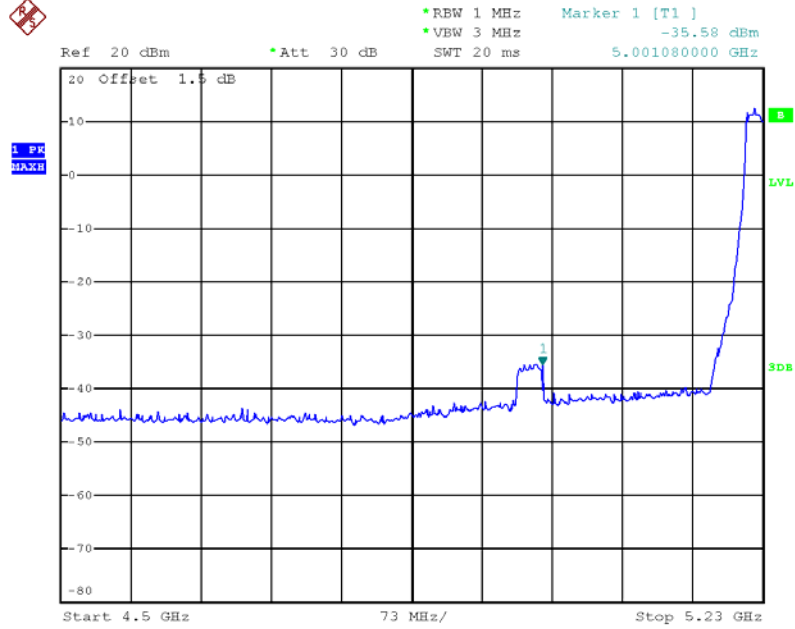


Date: 25.OCT.2012 11:29:06






Transmitter Conducted Bandedge Emissions Plot—Peak on 5180 MHz, HT-20, STBC, M0

Tx1

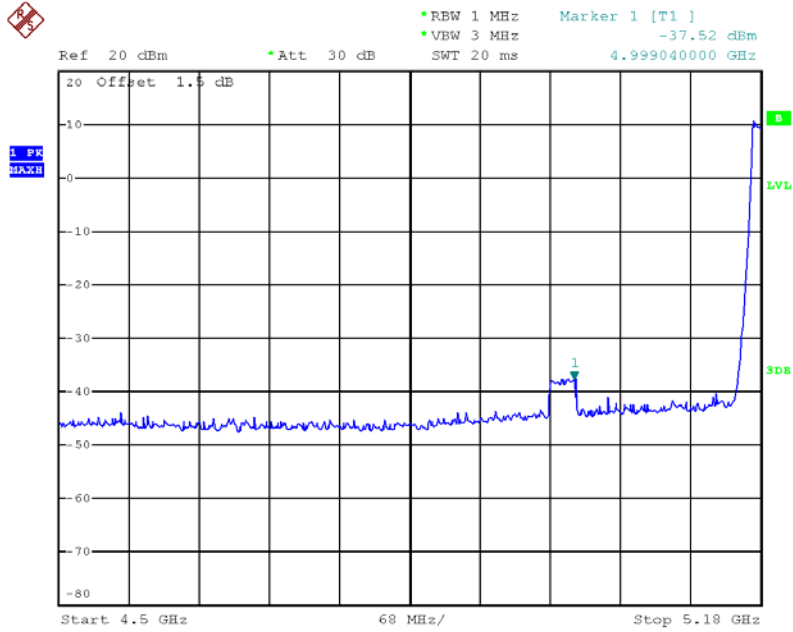

Date: 25.OCT.2012 14:39:52

Tx2

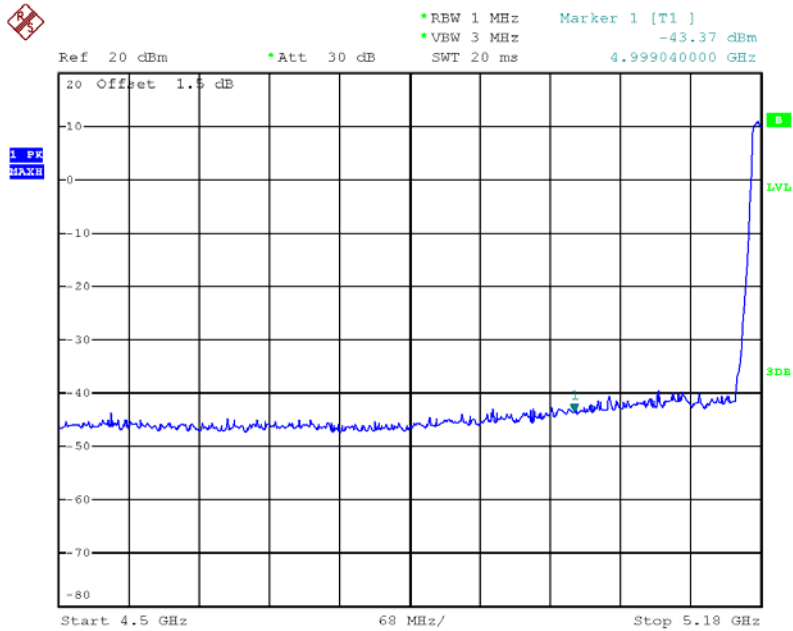


Date: 25.OCT.2012 14:41:12




Transmitter Conducted Bandedge Emissions Plot–Peak on 5180 MHz, HT-20, Beam Forming, M8

Tx1

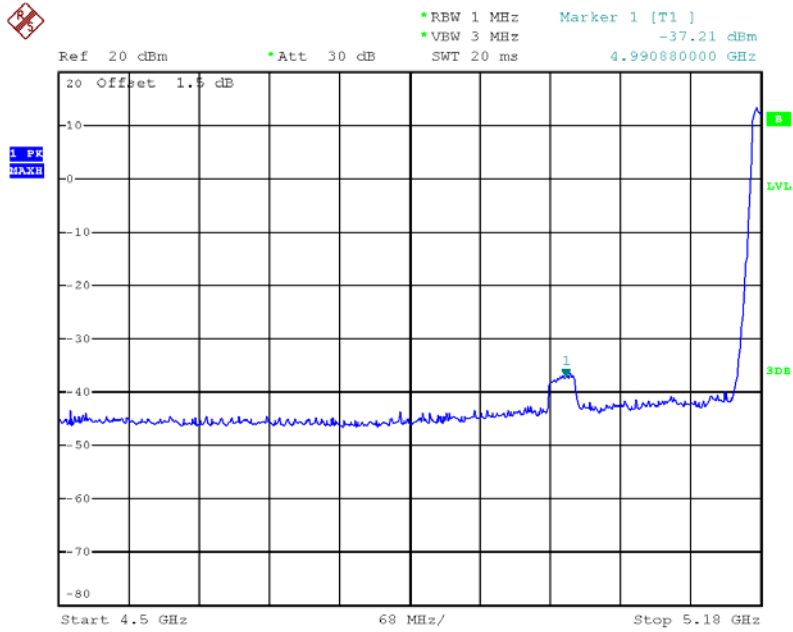

Date: 25.OCT.2012 14:42:37

Tx2

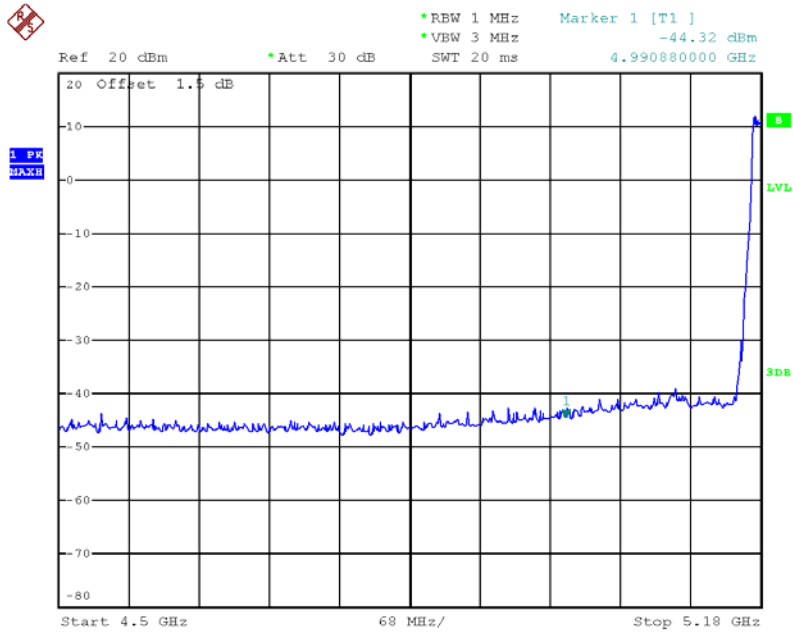


Date: 25.OCT.2012 14:43:59



Transmitter Conducted Bandedge Emissions Plot—Peak on 5200 MHz, Non HT-20, 6Mbps

Tx1

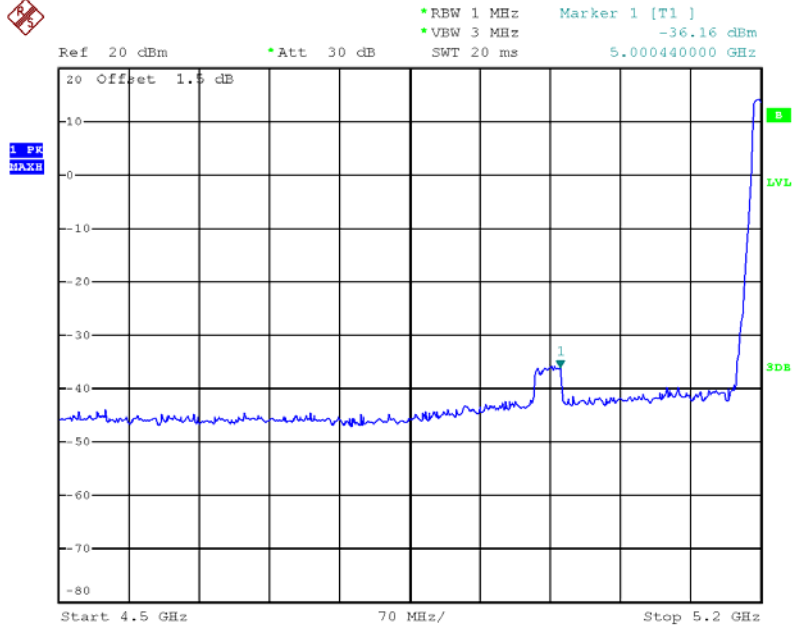


Date: 25.OCT.2012 11:40:20




Transmitter Conducted Bandedge Emissions Plot—Peak on 5200 MHz,  
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

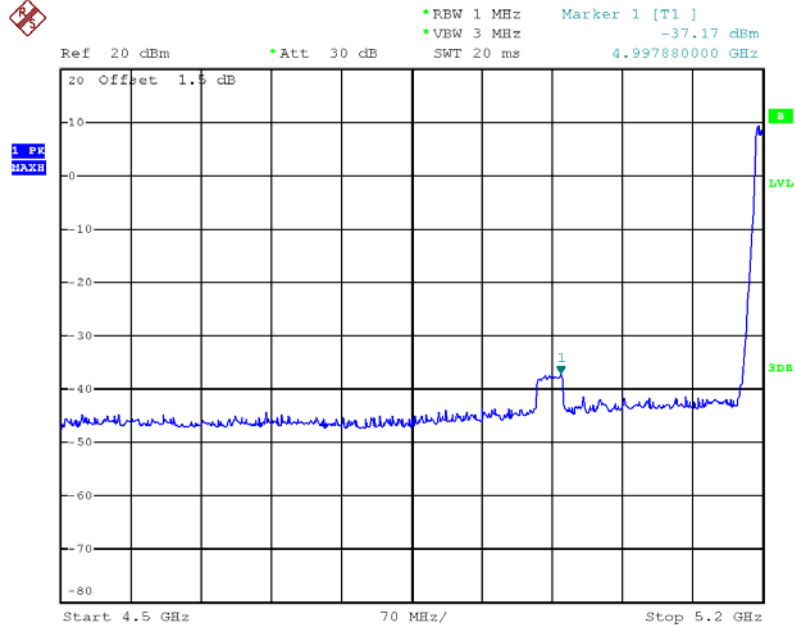

Date: 25.OCT.2012 14:44:53

Tx2

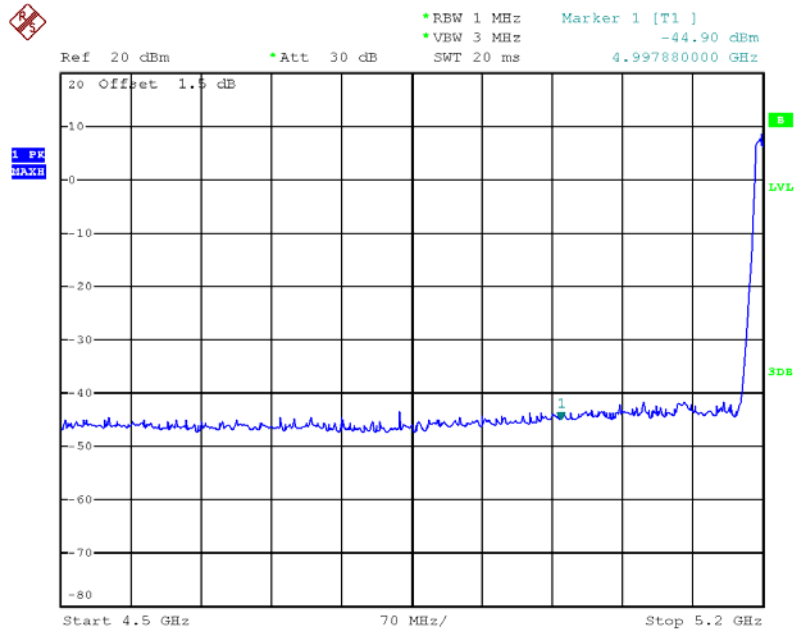


Date: 25.OCT.2012 14:46:28



Transmitter Conducted Bandedge Emissions Plot—Peak on 5200 MHz, HT-20, M0

Tx1

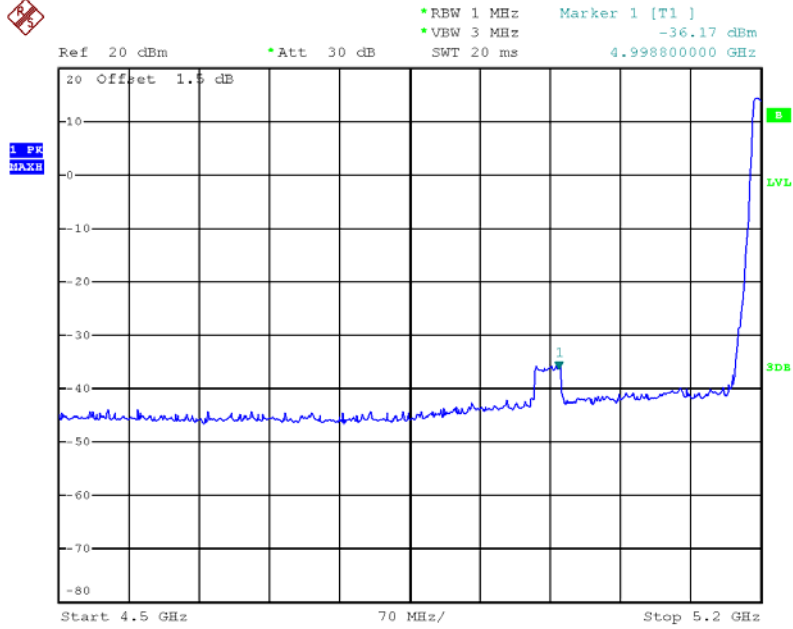


Date: 25.OCT.2012 11:35:22




Transmitter Conducted Bandedge Emissions Plot—Peak on 5200 MHz,  
HT-20 / HT-20, Beam Forming, M0

Tx1

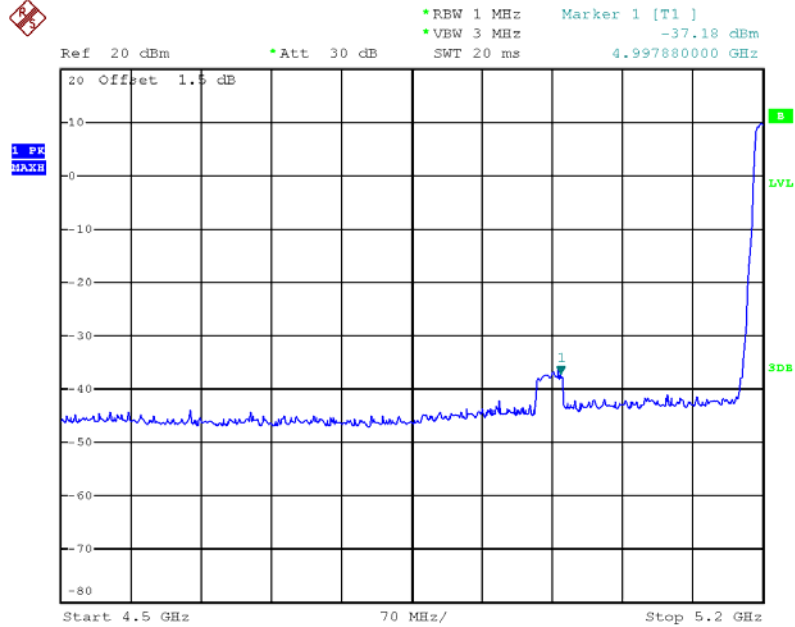

Date: 25.OCT.2012 14:47:09

Tx2

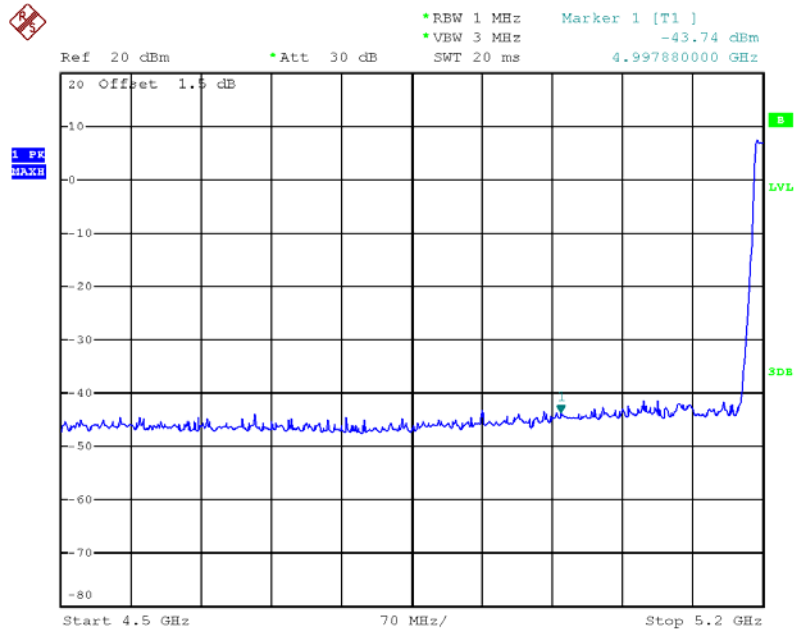


Date: 25.OCT.2012 14:48:12






Transmitter Conducted Bandedge Emissions Plot–Peak on 5200 MHz, HT-20, STBC, M0

Tx1

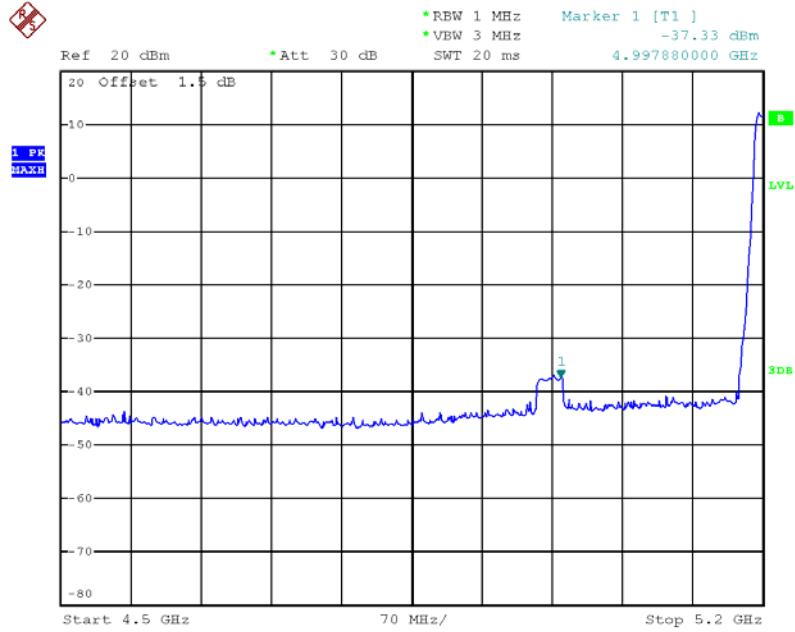

Date: 25.OCT.2012 14:50:43

Tx2

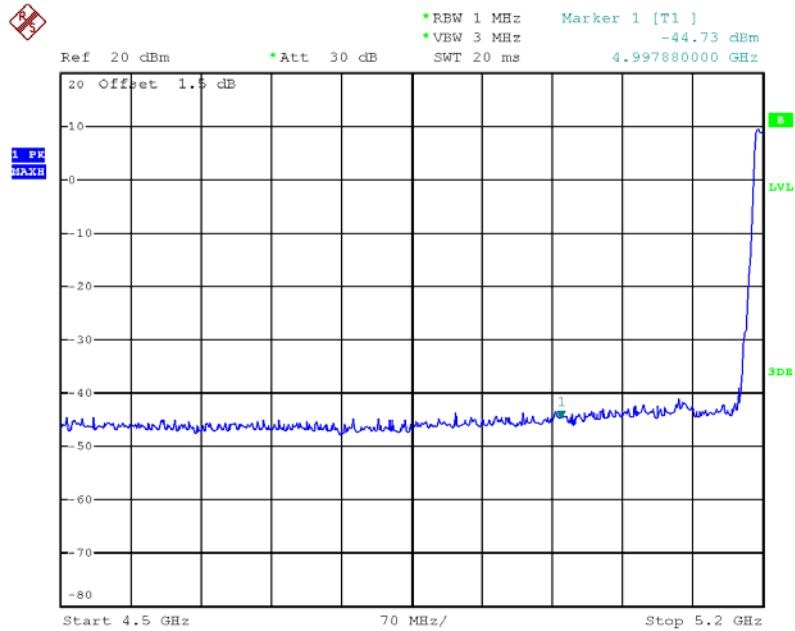


Date: 25.OCT.2012 14:51:52




Transmitter Conducted Bandedge Emissions Plot–Peak on 5200 MHz, HT-20, Beam Forming, M8

Tx1

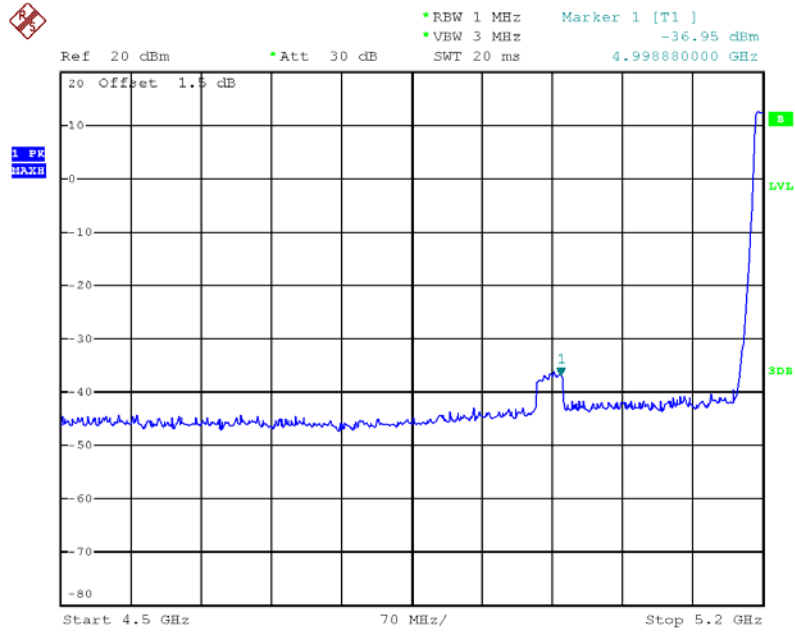

Date: 25.OCT.2012 15:42:06

Tx2

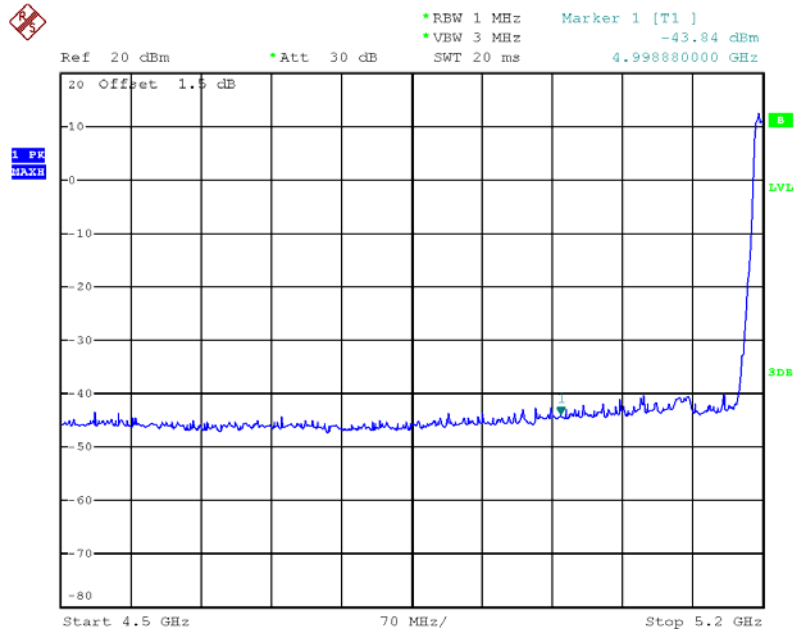


Date: 25.OCT.2012 15:43:19



Transmitter Conducted Bandedge Emissions Plot—Peak on 5240 MHz, Non HT-20, 6Mbps

Tx1

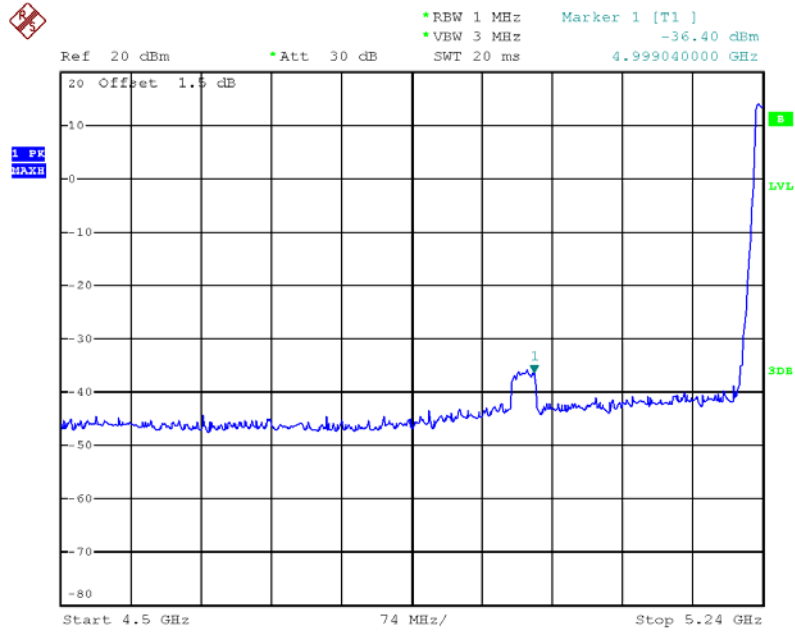


Date: 25.OCT.2012 11:39:15




Transmitter Conducted Bandedge Emissions Plot—Peak on 5240 MHz,  
Non HT-20 / Non HT-20, Beam Forming, 6Mbps

Tx1

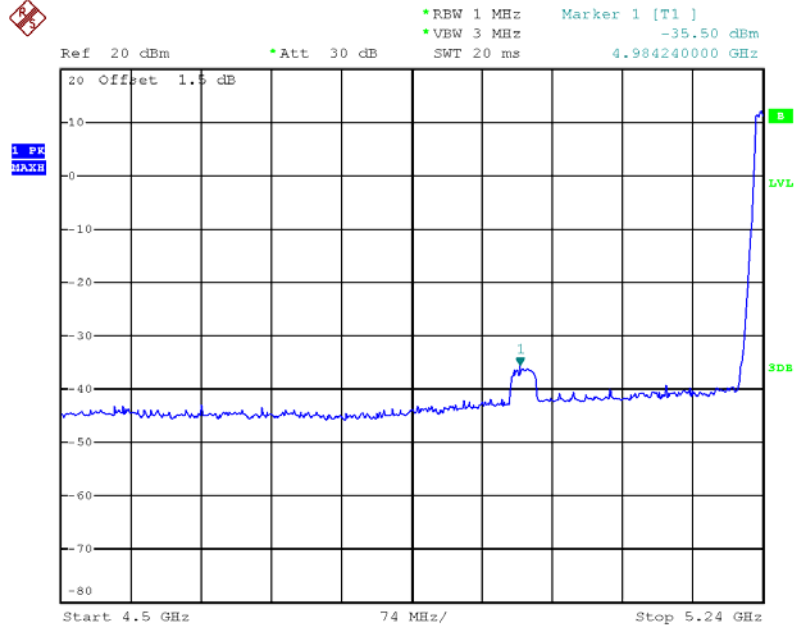

Date: 25.OCT.2012 17:36:48

Tx2

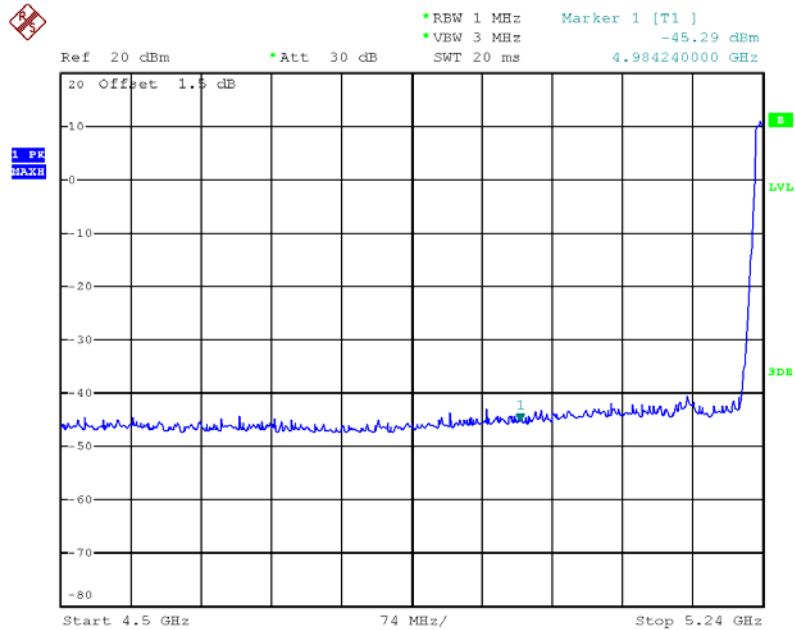


Date: 25.OCT.2012 17:37:11



Transmitter Conducted Bandedge Emissions Plot—Peak on 5240 MHz, HT-20, M0


Tx1

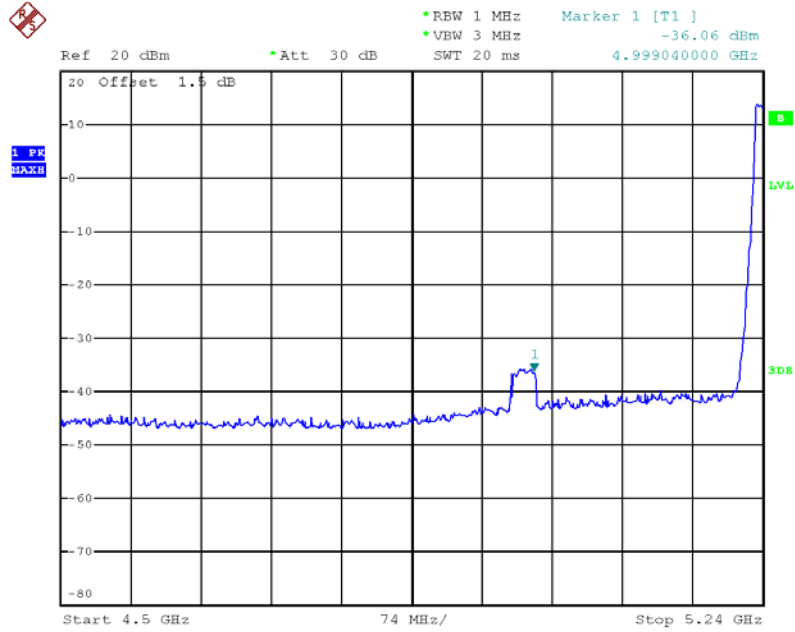

Date: 25.OCT.2012 11:37:13


**Transmitter Conducted Bandedge Emissions Plot–Peak on 5240 MHz,  
HT-20 / HT-20, Beam Forming, M0**

Tx1

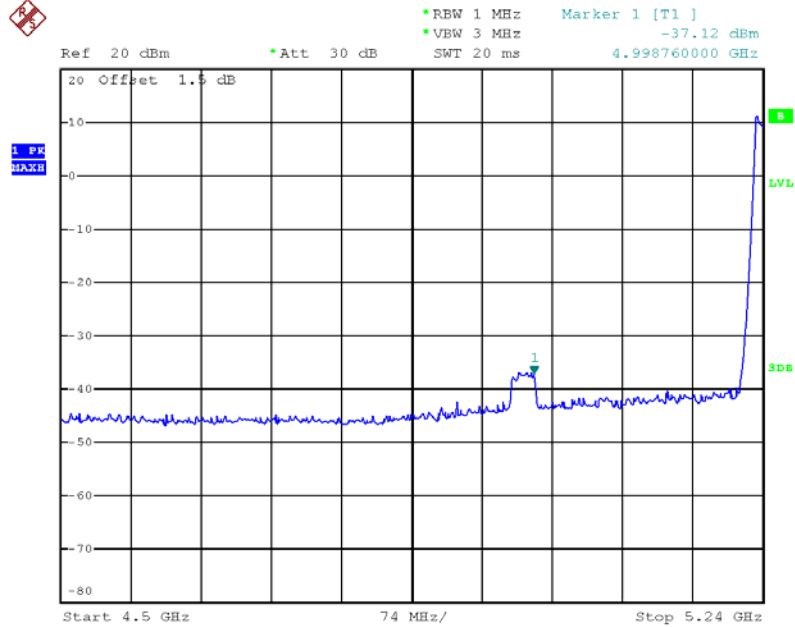

Date: 25.OCT.2012 17:39:51

Tx2

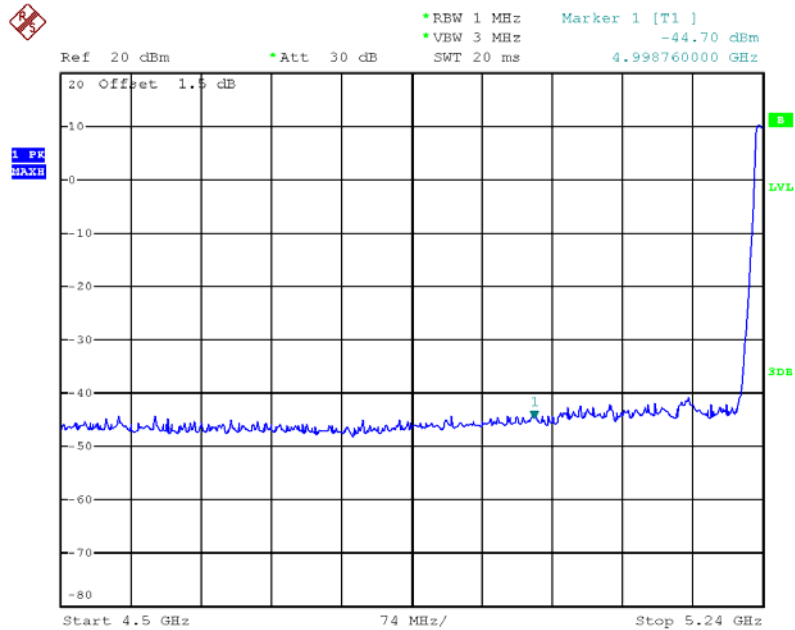


Date: 25.OCT.2012 17:40:07




Transmitter Conducted Bandedge Emissions Plot-Peak on 5240 MHz, HT-20, STBC, M0

Tx1

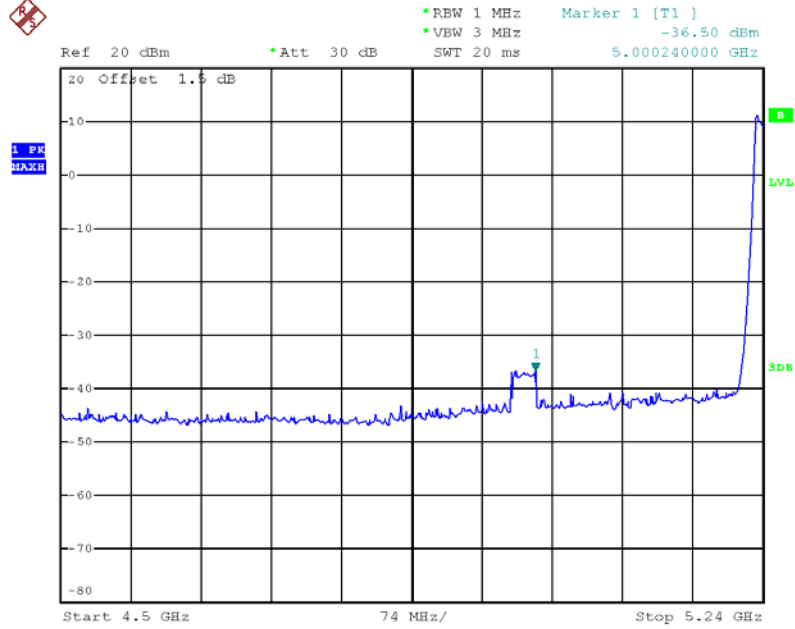

Date: 25.OCT.2012 17:40:43

Tx2

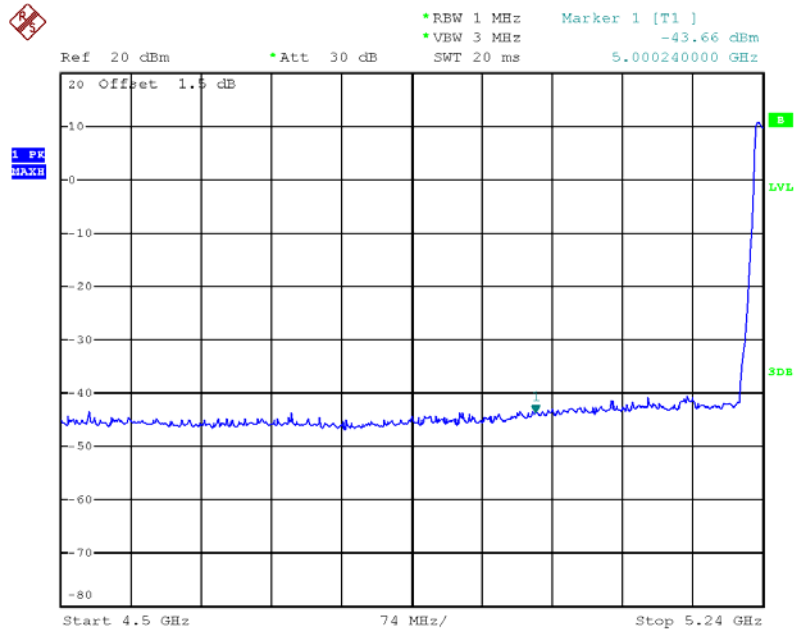


Date: 25.OCT.2012 17:41:28




Transmitter Conducted Bandedge Emissions Plot–Peak on 5240 MHz, HT-20, Beam Forming, M8

Tx1

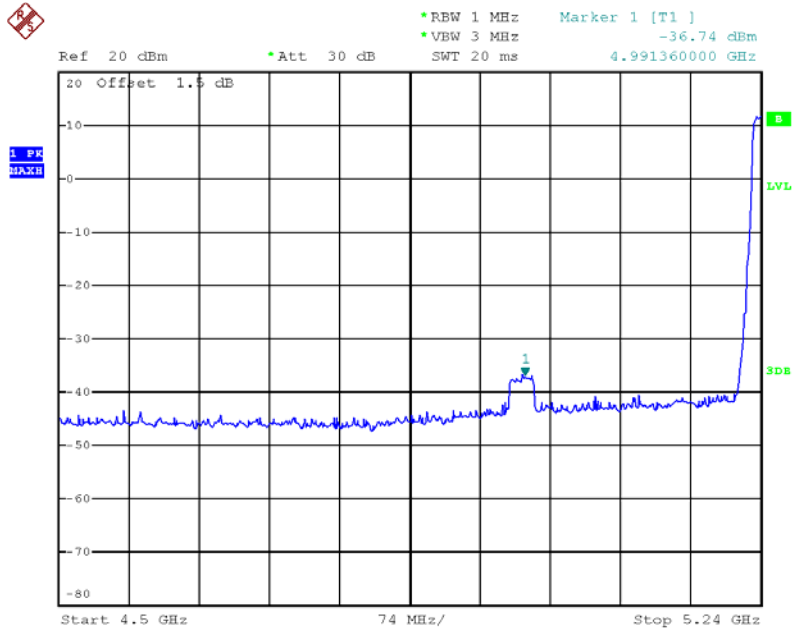

Date: 25.OCT.2012 17:42:03

Tx2

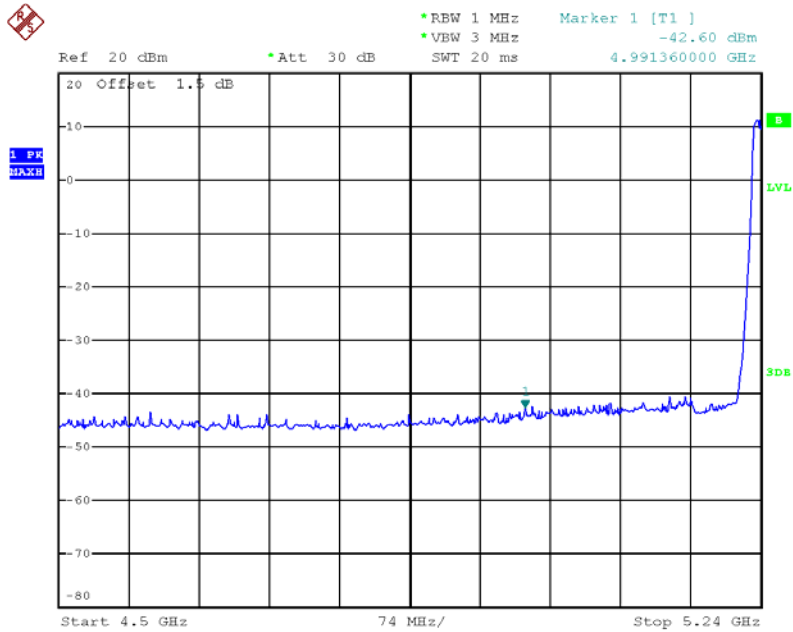


Date: 25.OCT.2012 17:42:36





Transmitter Conducted Bandedge Emissions Plot—Peak on 5190 MHz, HT-40, M0

Tx1

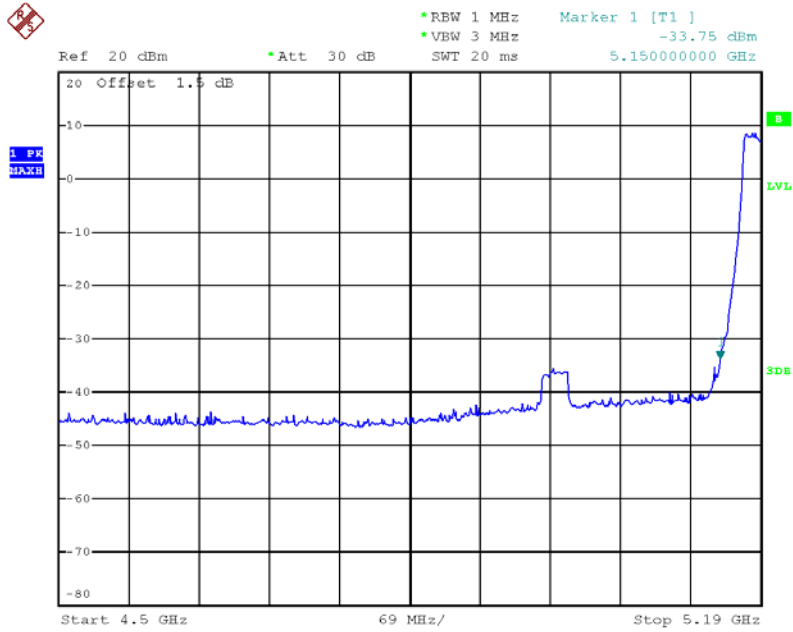


Date: 25.OCT.2012 11:27:51




Transmitter Conducted Bandedge Emissions Plot—Peak on 5190 MHz,  
HT-40 / HT-40, Beam Forming, M0

Tx1

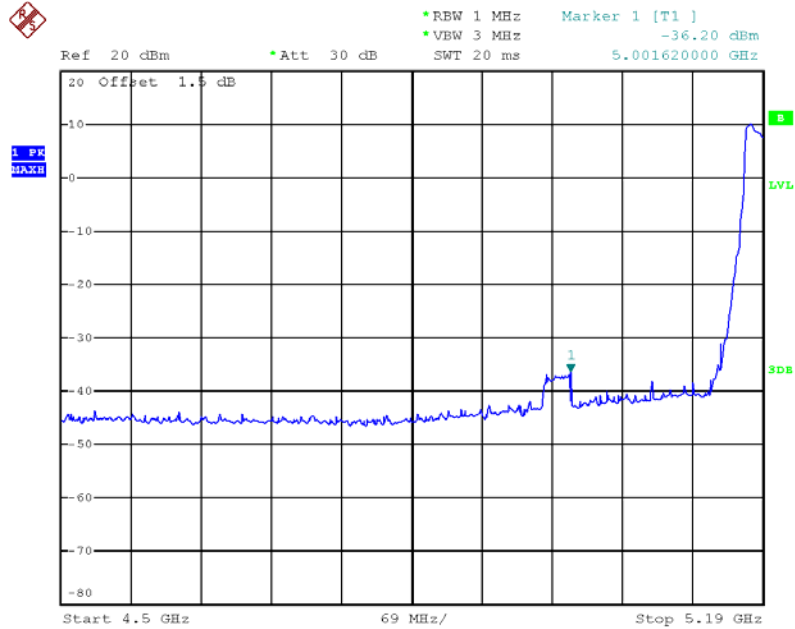

Date: 25.OCT.2012 17:53:24

Tx2

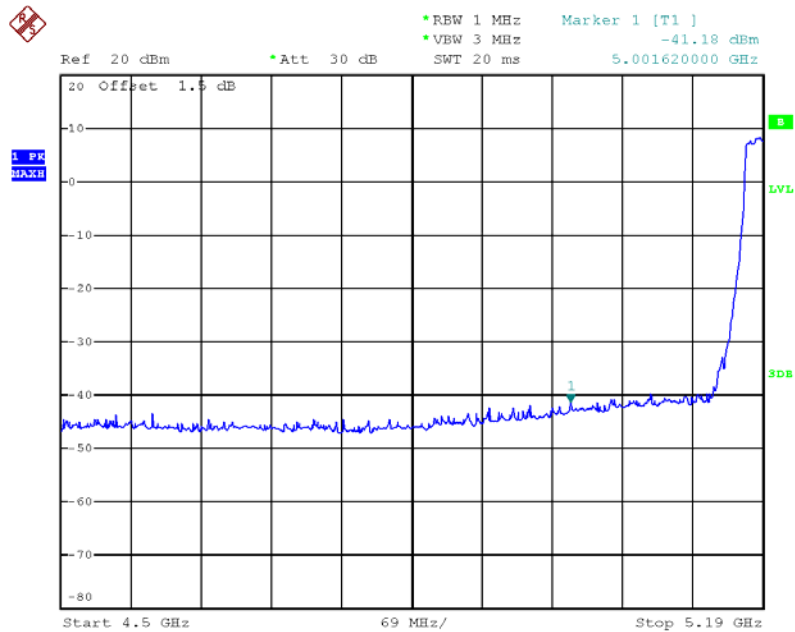


Date: 25.OCT.2012 17:53:50




Transmitter Conducted Bandedge Emissions Plot-Peak on 5190 MHz, HT-40, STBC, M0

Tx1

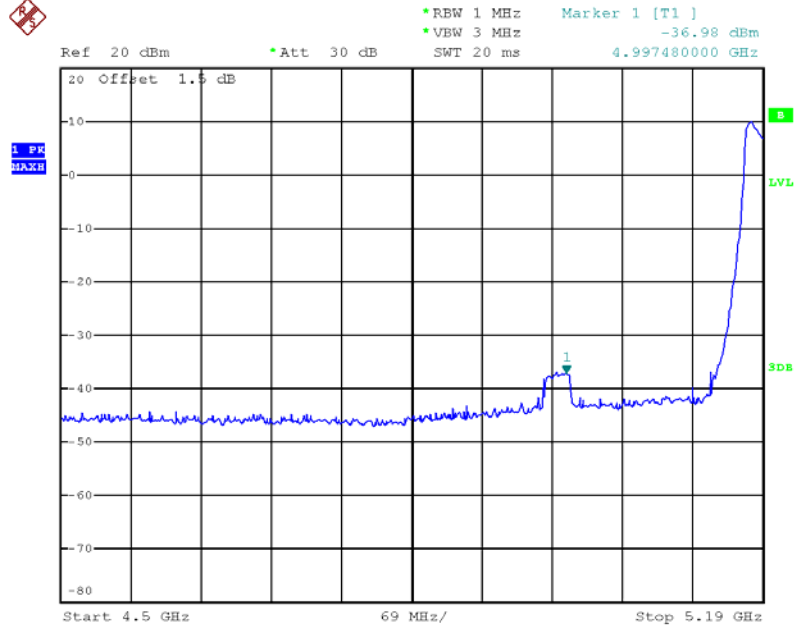

Date: 25.OCT.2012 17:52:24

Tx2

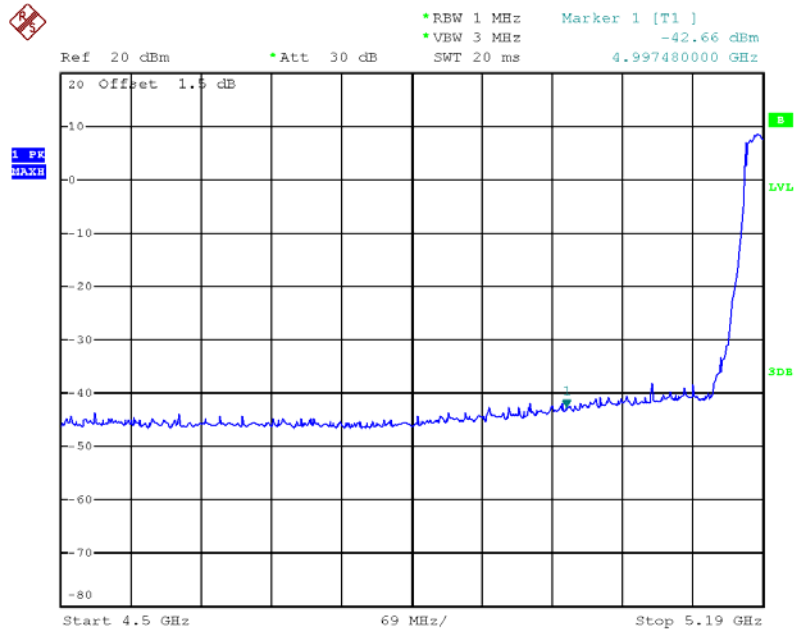


Date: 25.OCT.2012 17:52:57




Transmitter Conducted Bandedge Emissions Plot–Peak on 5190 MHz, HT-40, Beam Forming, M8

Tx1

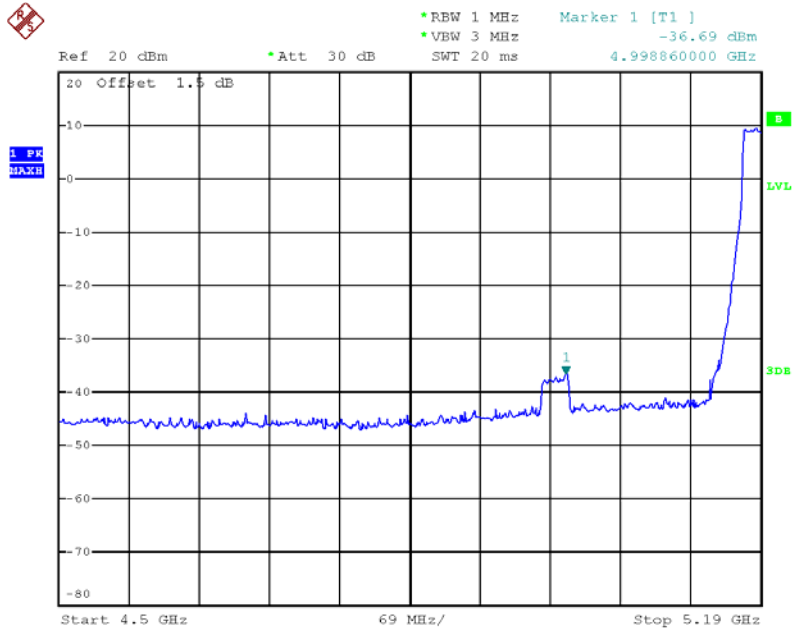

Date: 25.OCT.2012 17:54:20

Tx2

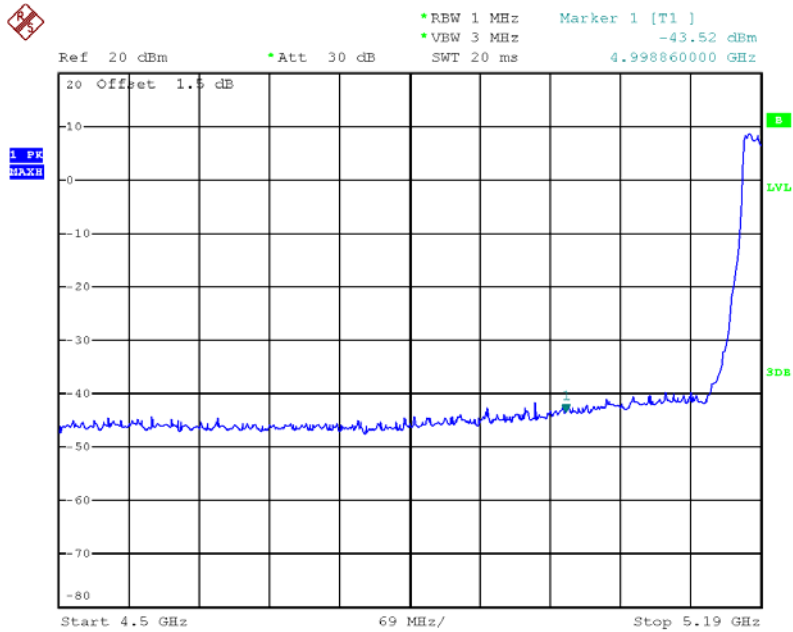


Date: 25.OCT.2012 17:54:39



Transmitter Conducted Bandedge Emissions Plot-Peak on 5230 MHz, HT-40, M0


Tx1

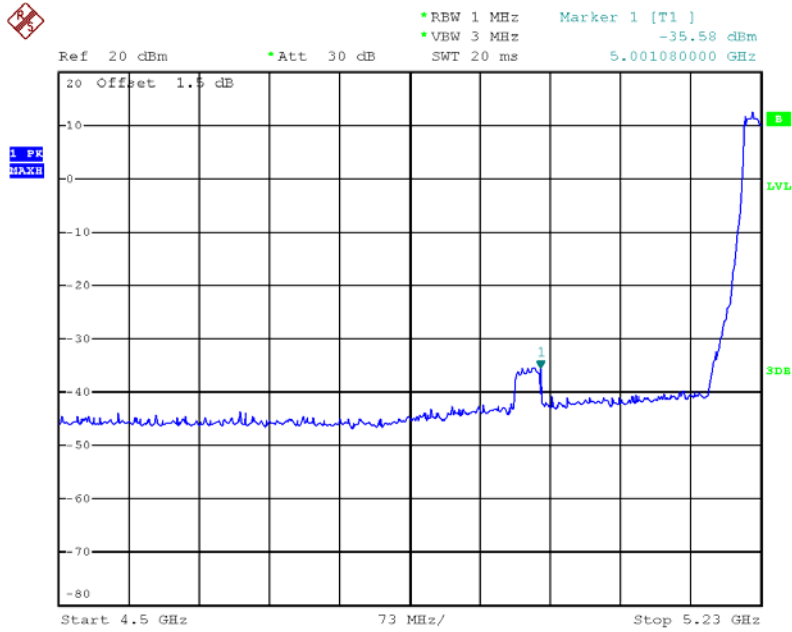

Date: 25.OCT.2012 11:29:06


Transmitter Conducted Bandedge Emissions Plot–Peak on 5230 MHz,  
HT-40 / HT-40, Beam Forming, M0

Tx1

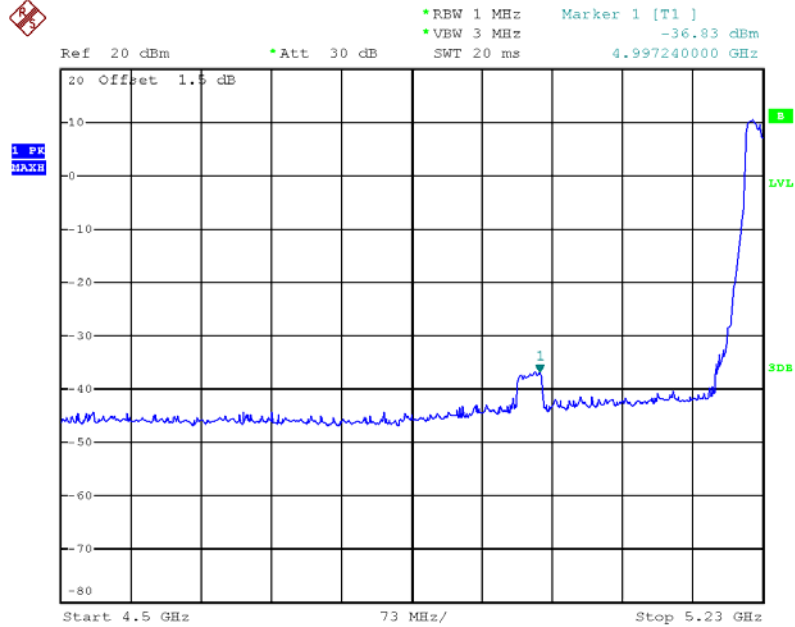

Date: 25.OCT.2012 18:00:16

Tx2

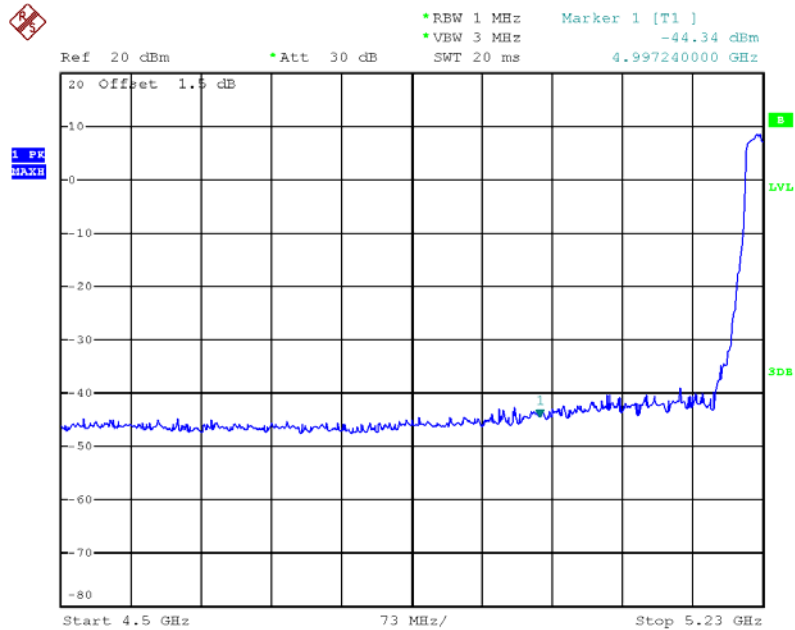


Date: 25.OCT.2012 18:00:33




Transmitter Conducted Bandedge Emissions Plot–Peak on 5230 MHz, HT-40, STBC, M0

Tx1

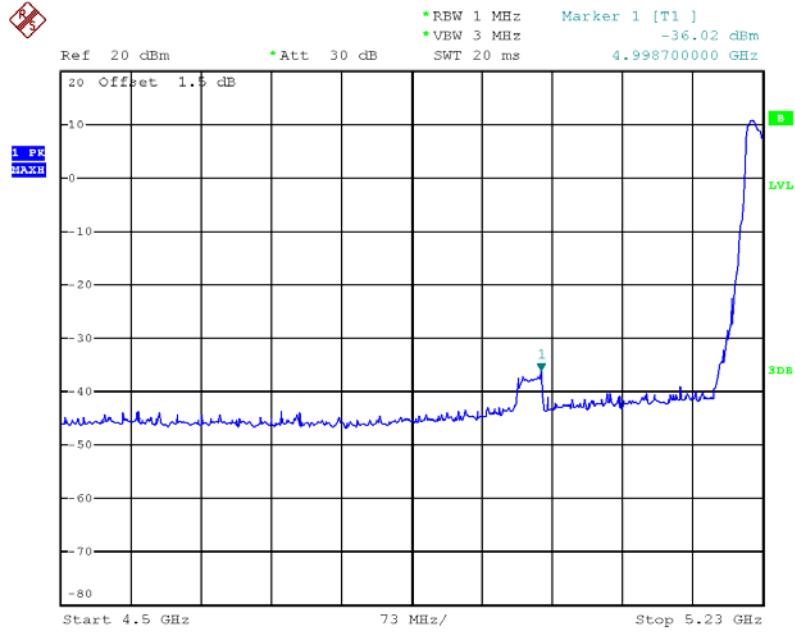

Date: 25.OCT.2012 18:00:55

Tx2

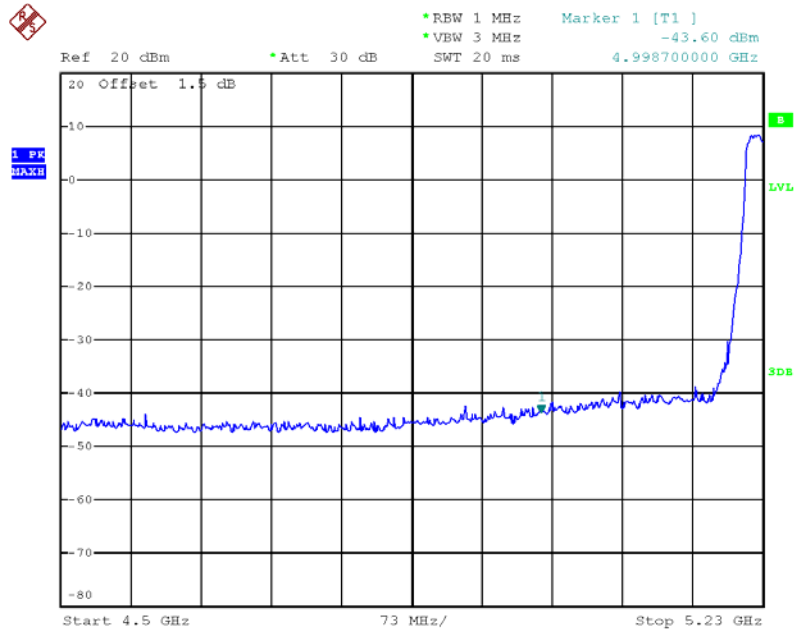


Date: 25.OCT.2012 18:01:15




Transmitter Conducted Bandedge Emissions Plot–Peak on 5230 MHz, HT-40, Beam Forming, M8

Tx1

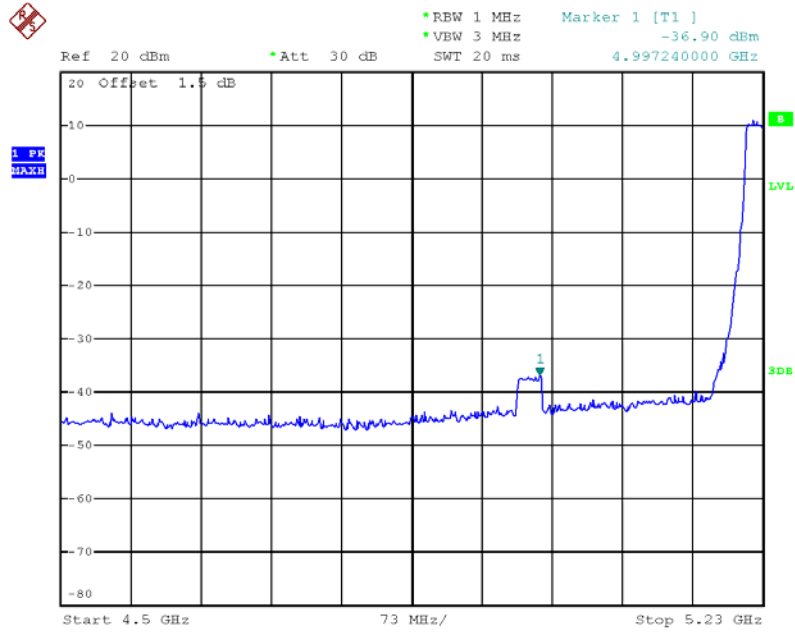

Date: 25.OCT.2012 18:02:02

Tx2

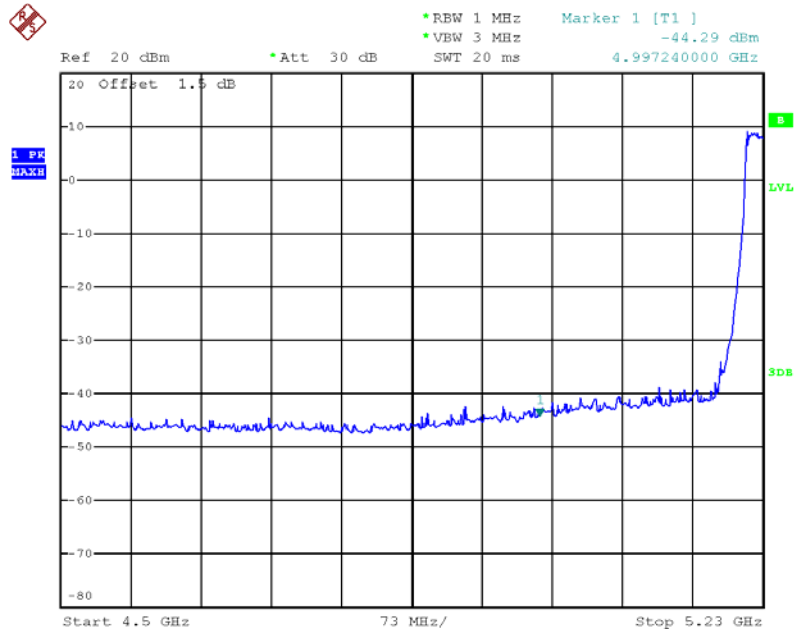

Date: 25.OCT.2012 18:02:25



### 3.7 Transmitter Conducted Unwanted Emissions

#### 3.7.1 Transmitter Conducted Unwanted Emissions Limit

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	


#### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.7.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty $\geq$ 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For conducted measurement, refer as FCC KDB 789033, clause G.

#### 3.7.4 Test Setup

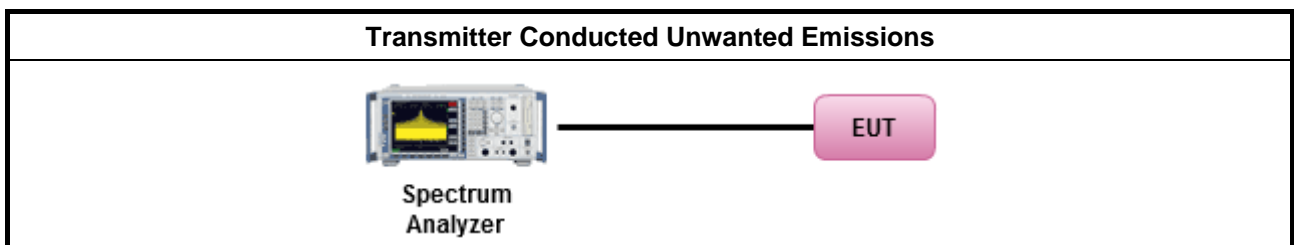



3.7.5 Test Result of Transmitter Conducted Unwanted Emissions

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Conducted Spur Delta(dB)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	6	-39.38	-32	7.38
	Non HT-20, 6 to 54Mbps	6	-39.19	-35	4.19
	Non HT-20, Beam Forming, 6 to 54Mbps	6	-39.19	-38	1.19
	HT-20, M0 to M7	M0	-38.48	-32	6.48
	HT-20, M0 to M15	M0	-39.19	-35	4.19
	HT-20, STBC, M0 to M7	M0	-39.19	-35	4.19
	HT-20, Beam Forming, M0 to M7	M0	-39.75	-38	1.75
	HT-20, Beam Forming, M8 to M15	M8	-39.75	-35	4.75
5200	Non HT-20, 6 to 54Mbps	6	-39.88	-32	7.88
	Non HT-20, 6 to 54Mbps	6	-39.75	-35	4.75
	Non HT-20, Beam Forming, 6 to 54Mbps	6	-39.75	-38	1.75
	HT-20, M0 to M7	M0	-39.11	-32	7.11
	HT-20, M0 to M15	M0	-39.75	-35	4.75
	HT-20, STBC, M0 to M7	M0	-39.75	-35	4.75
	HT-20, Beam Forming, M0 to M7	M0	-39.49	-38	1.49
	HT-20, Beam Forming, M8 to M15	M8	-39.49	-35	4.49
5240	Non HT-20, 6 to 54Mbps	6	-39.87	-32	7.87
	Non HT-20, 6 to 54Mbps	6	-39.55	-35	4.55
	Non HT-20, Beam Forming, 6 to 54Mbps	6	-39.55	-38	1.55
	HT-20, M0 to M7	M0	-39.11	-32	7.11
	HT-20, M0 to M15	M0	-39.55	-35	4.55
	HT-20, STBC, M0 to M7	M0	-39.55	-35	4.55
	HT-20, Beam Forming, M0 to M7	M0	-39.43	-38	1.43
	HT-20, Beam Forming, M8 to M15	M8	-39.43	-35	4.43
5190	HT-40, M0 to M7	M0	-39.69	-32	7.69
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	-40.27	-35	5.27
	HT-40, Beam Forming, M0 to M7	M0	-40.27	-38	2.27
	HT-40, Beam Forming, M8 to M15	M8	-40.27	-35	5.27
5230	HT-40, M0 to M7	M0	-39.41	-32	7.41
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	-39.55	-35	4.55
	HT-40, Beam Forming, M0 to M7	M0	-39.55	-38	1.55
	HT-40, Beam Forming, M8 to M15	M8	-39.55	-35	4.55

Note 1: 1TX limit=-27dBm-Antenna Gain(5dBi)=-32dBm

2TX limit=-27dBm-Antenna Gain(5dBi)-10log(2)=-35dBm

2TX Beam Forming limit=-27dBm-Antenna Gain(5dBi)-10log(2)-array gain=-38dBm


Note 2: Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor [6.02 dB].



Transmitter Conducted Unwanted Emissions Plot on 5180 MHz, Non HT-20, 6Mbps

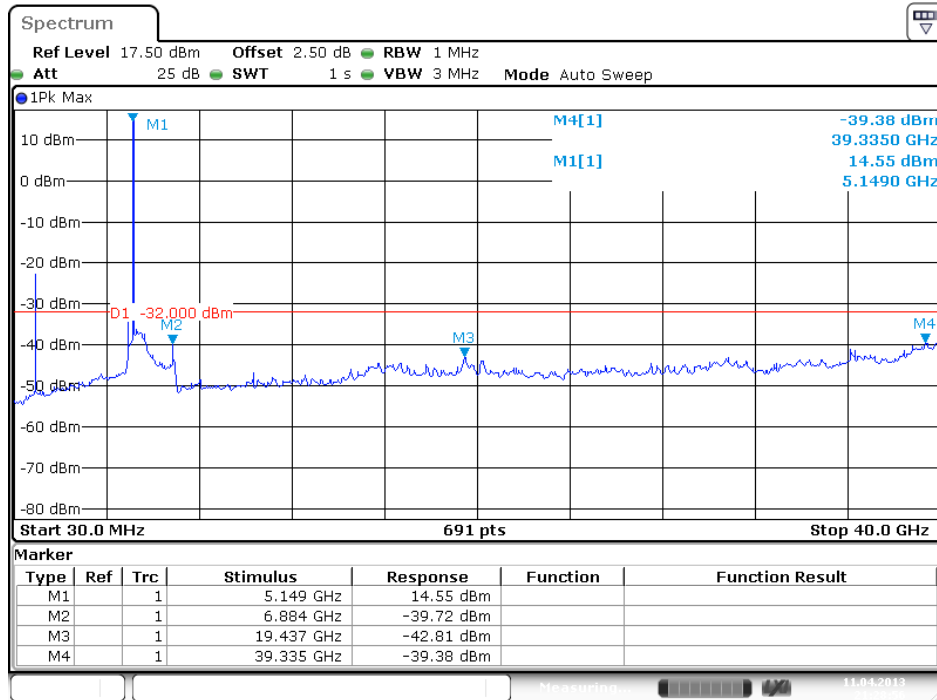


Transmitter Conducted Unwanted Emissions Plot on 5180 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

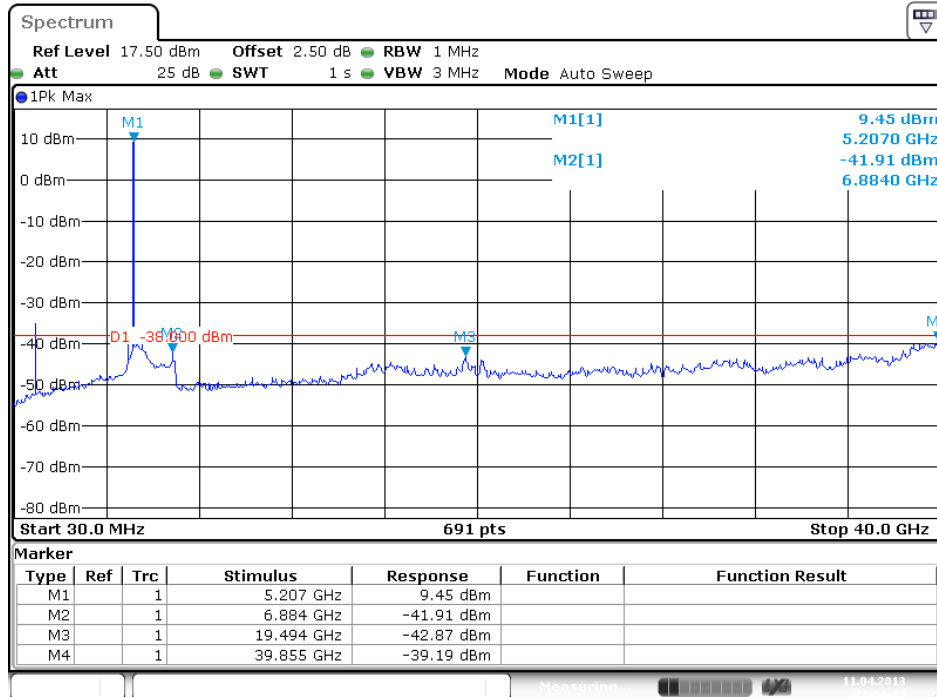




Transmitter Conducted Unwanted Emissions Plot on 5180 MHz, HT-20, M0

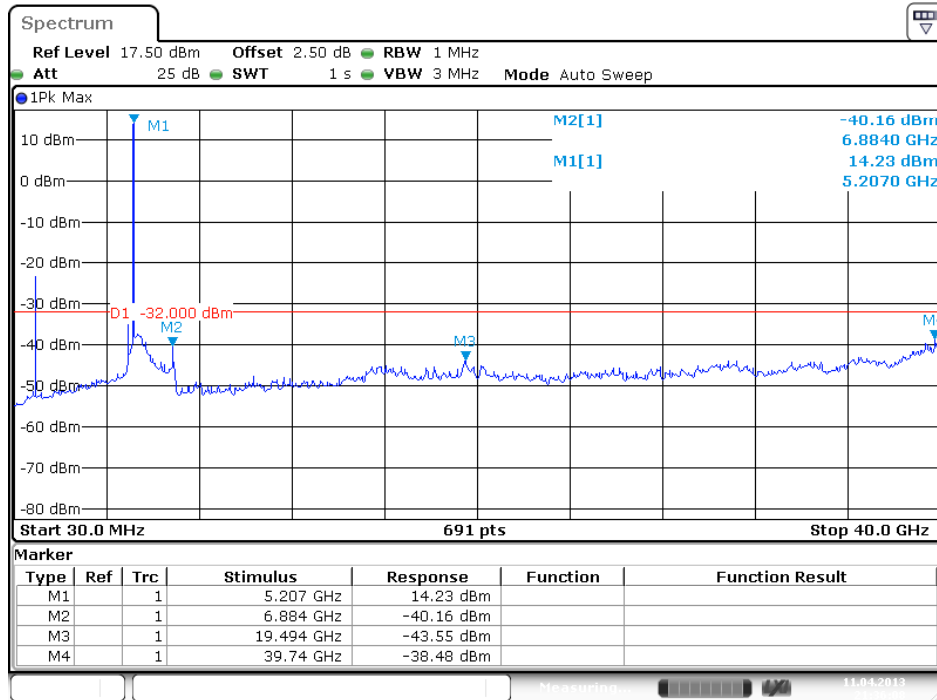

Date: 11.APR.2013 21:36:09


Transmitter Conducted Unwanted Emissions Plot on 5180 MHz, HT-20 / HT-20, STBC / M0

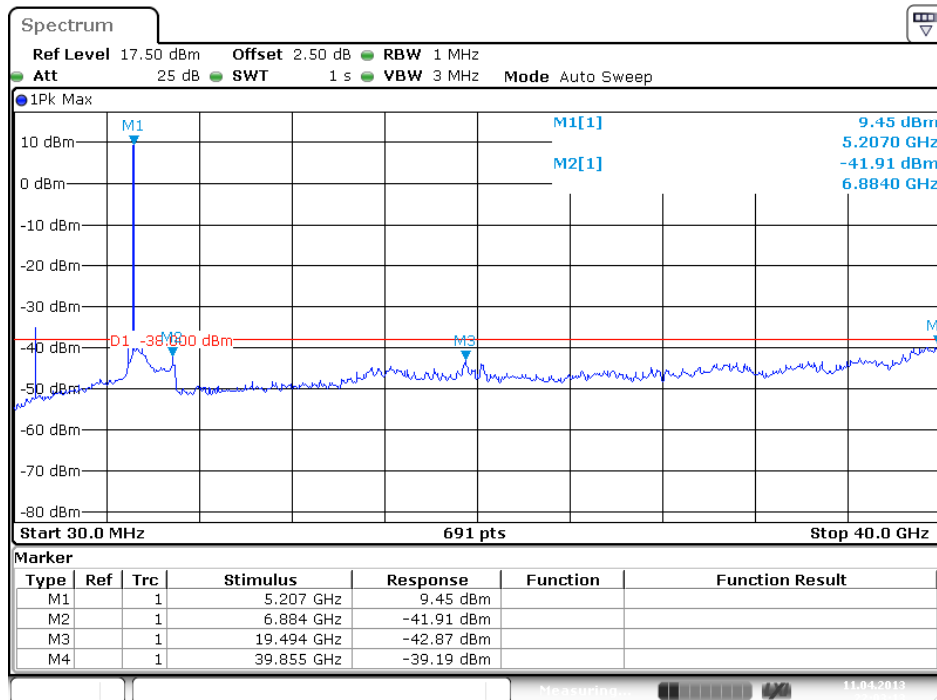


Date: 11.APR.2013 22:03:13



Transmitter Conducted Unwanted Emissions Plot on 5180 MHz, HT-20, Beam Forming, M0, M8

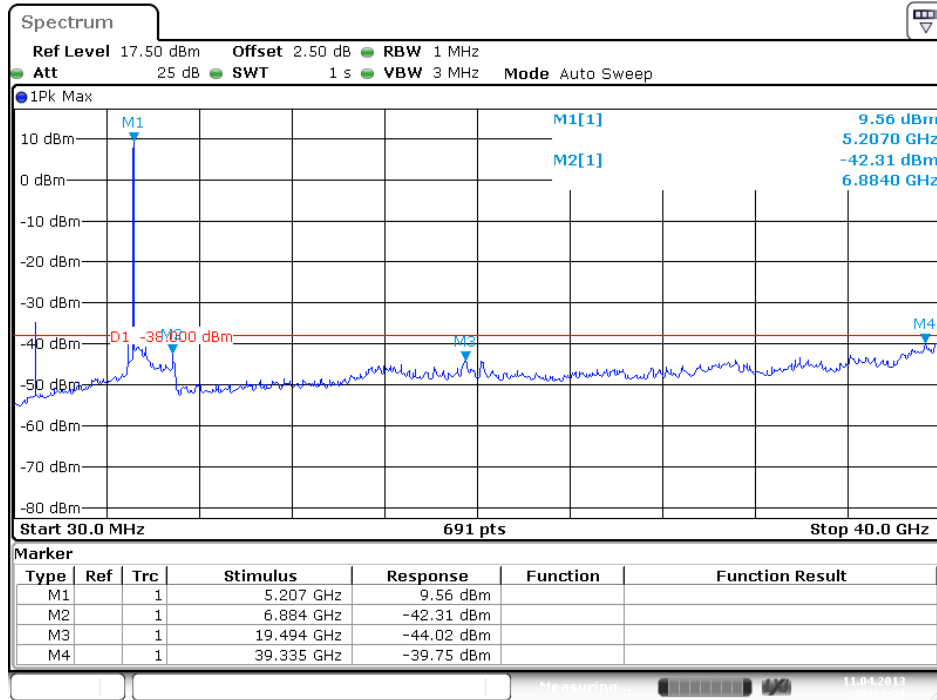


Transmitter Conducted Unwanted Emissions Plot on 5200 MHz, Non HT-20, 6Mbps

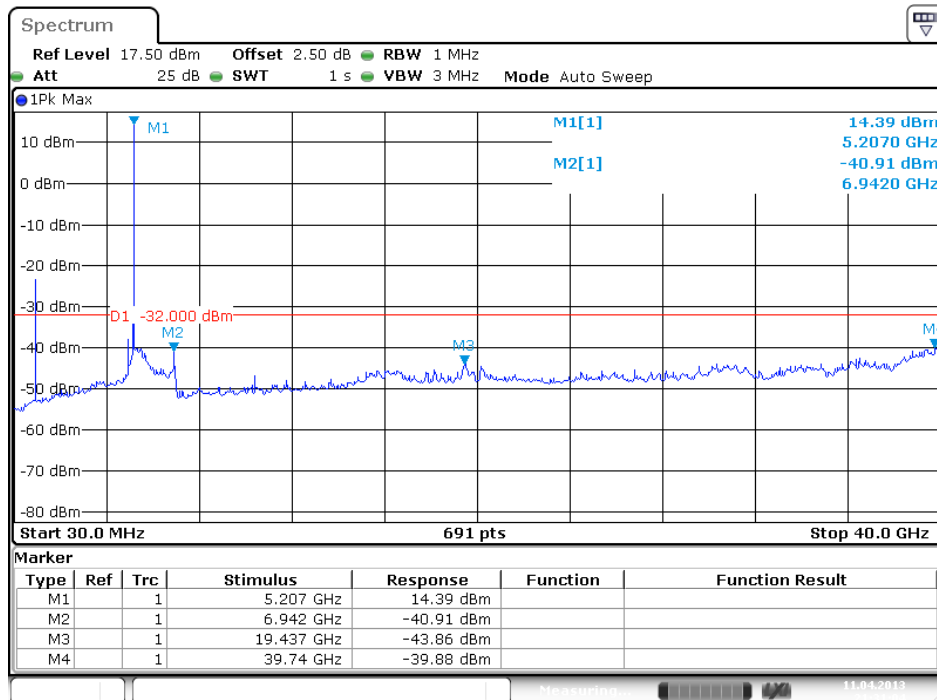




**Transmitter Conducted Unwanted Emissions Plot on 5200 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps**

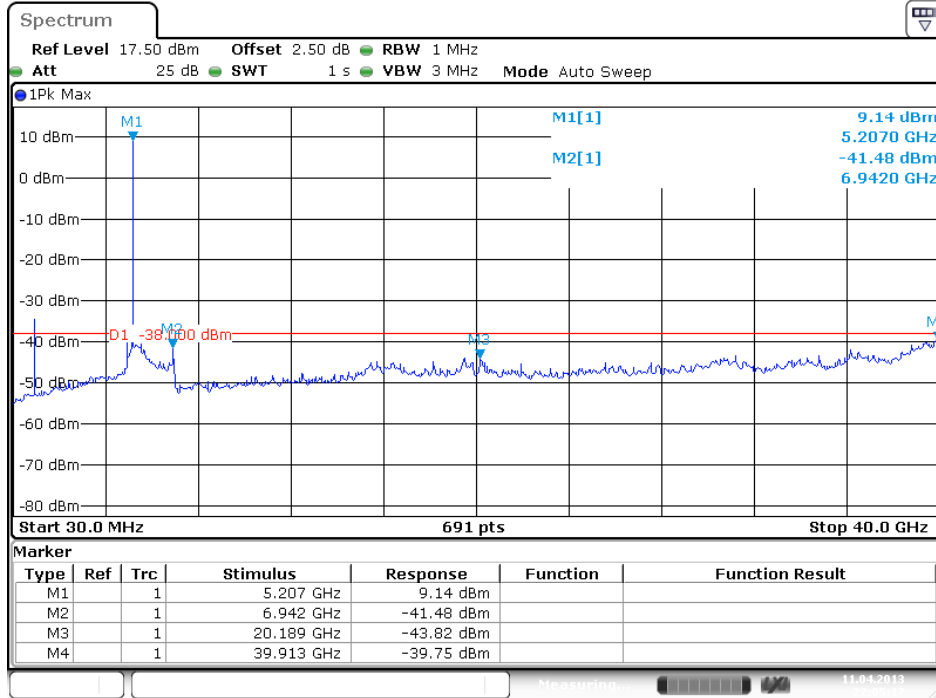


**Transmitter Conducted Unwanted Emissions Plot on 5200 MHz, HT-20, M0**

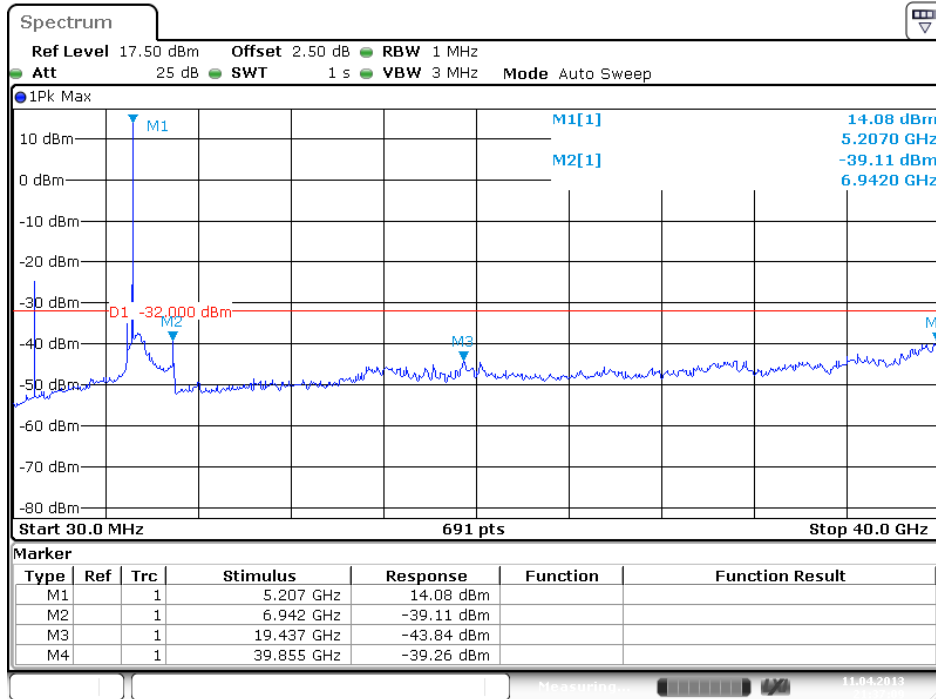




Transmitter Conducted Unwanted Emissions Plot on 5200 MHz, HT-20 / HT-20, STBC, M0

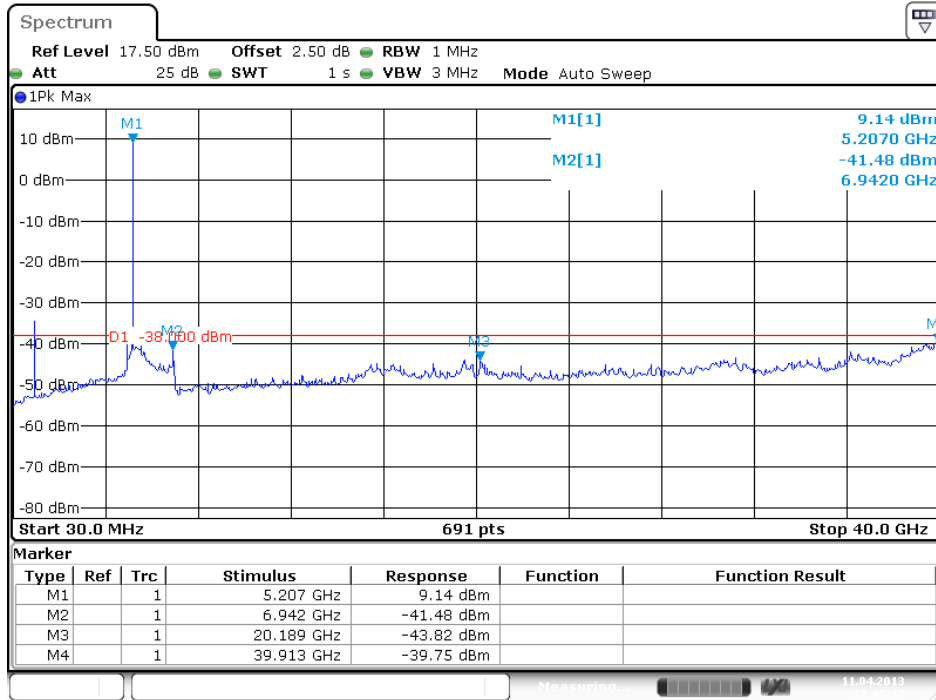


Transmitter Conducted Unwanted Emissions Plot on 5200 MHz, HT-20, Beam Forming, M0, M8

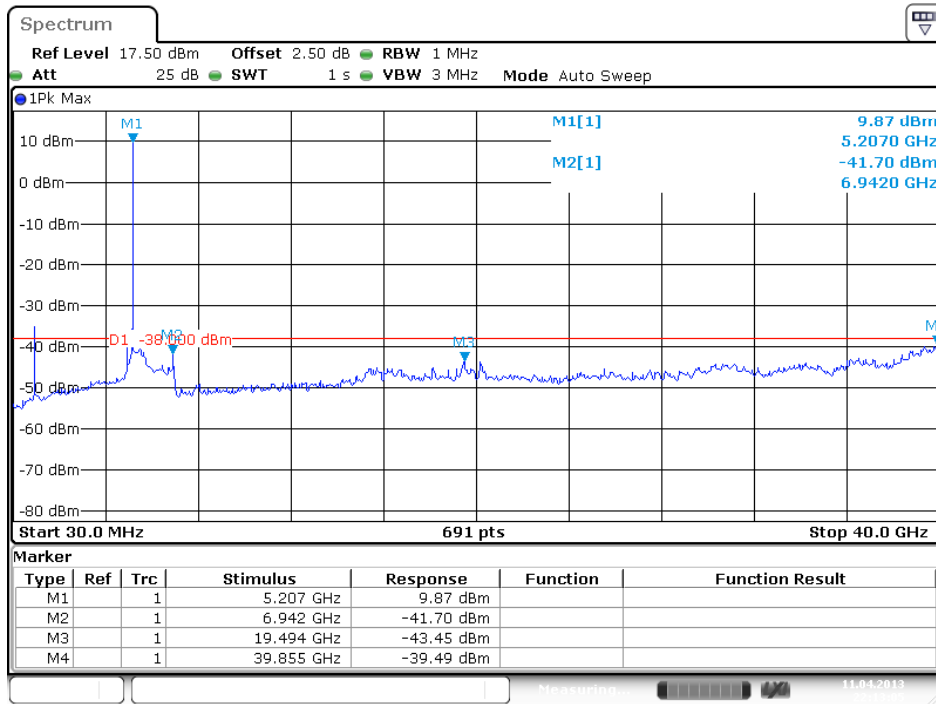




Transmitter Conducted Unwanted Emissions Plot on 5240 MHz, Non HT-20, 6Mbps

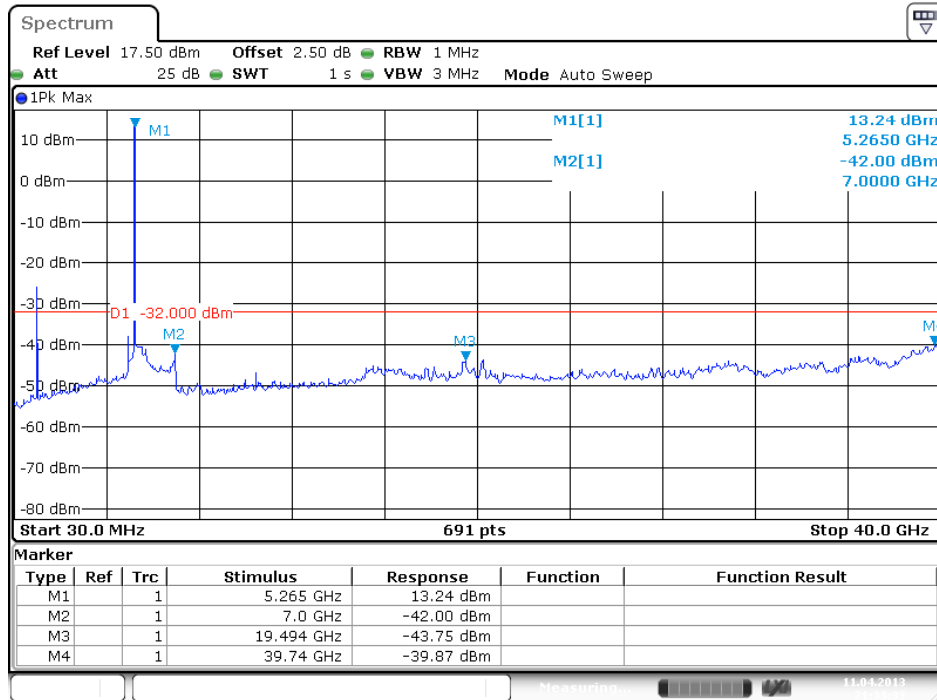

Date: 11.APR.2013 21:33:33

Transmitter Conducted Unwanted Emissions Plot on 5240 MHz, Non HT-20 / Non HT-20, Beam Forming, 6Mbps

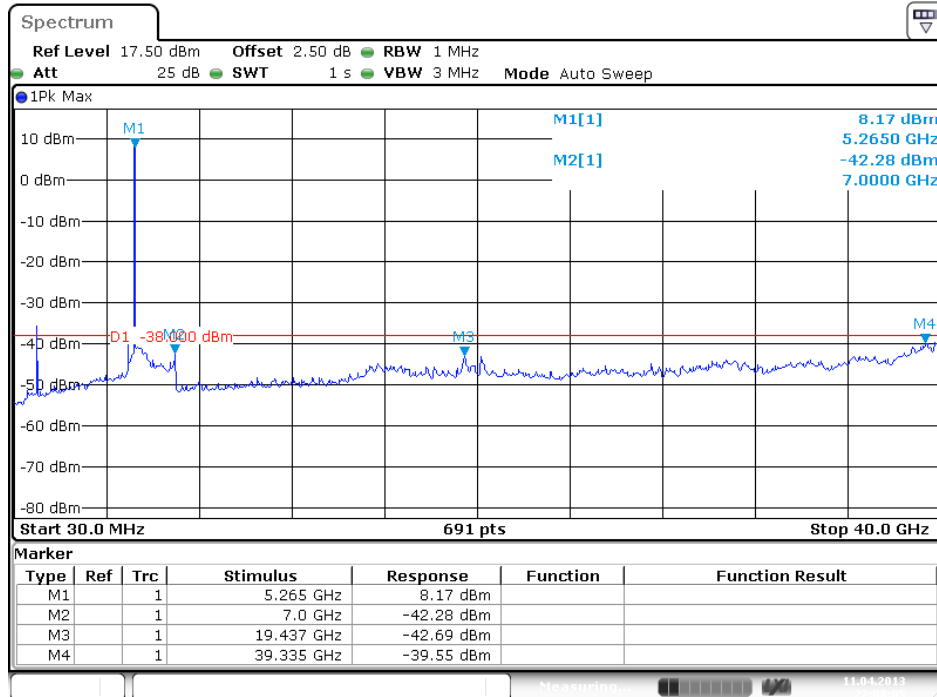


Date: 11.APR.2013 22:08:05






Transmitter Conducted Unwanted Emissions Plot on 5240 MHz, HT-20, M0

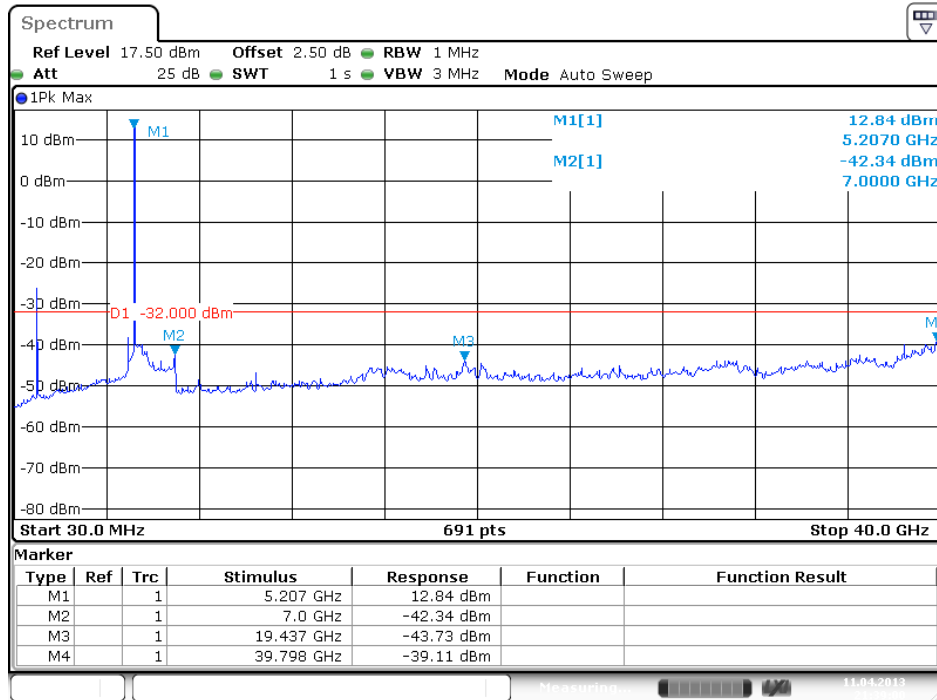

Date: 11.APR.2013 21:39:00


Transmitter Conducted Unwanted Emissions Plot on 5240 MHz, HT-20 / HT-20, STBC, M0

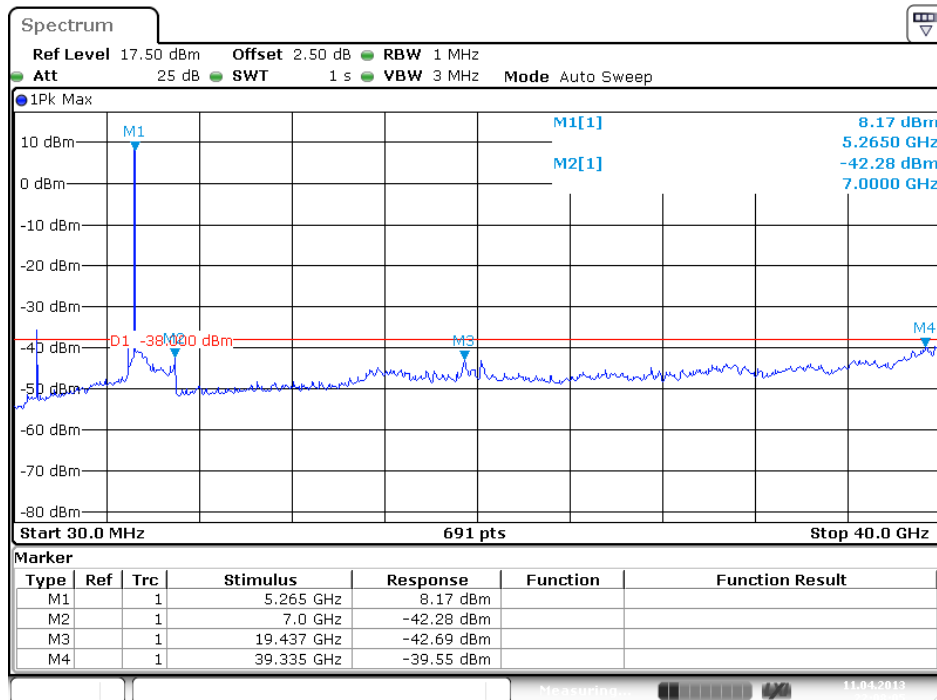


Date: 11.APR.2013 22:08:05



Transmitter Conducted Unwanted Emissions Plot on 5240 MHz, HT-20, Beam Forming, M0, M8

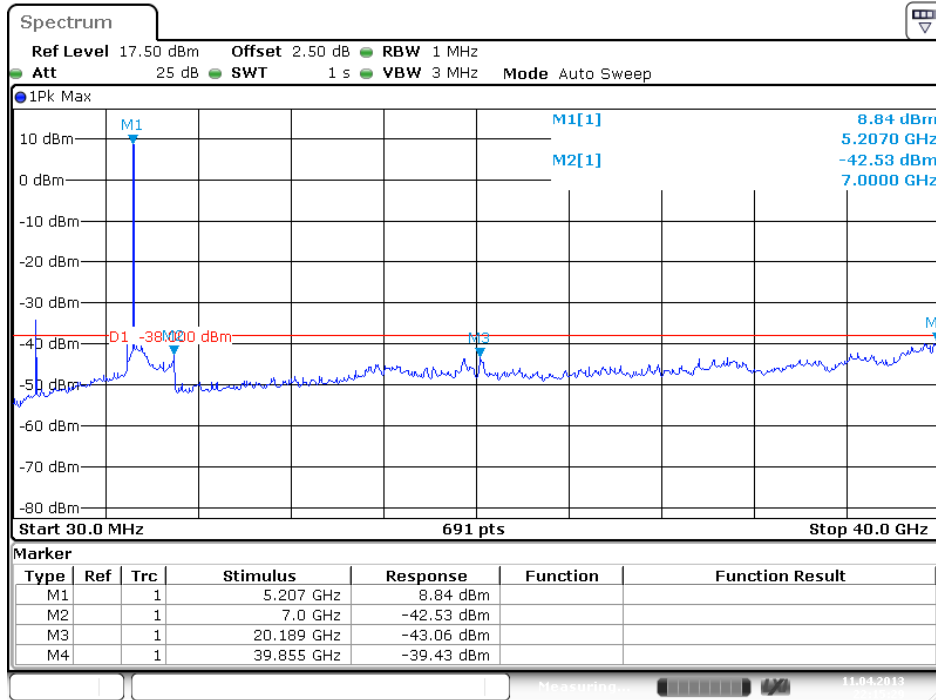


Transmitter Conducted Unwanted Emissions Plot on 5190 MHz, HT-40, M0

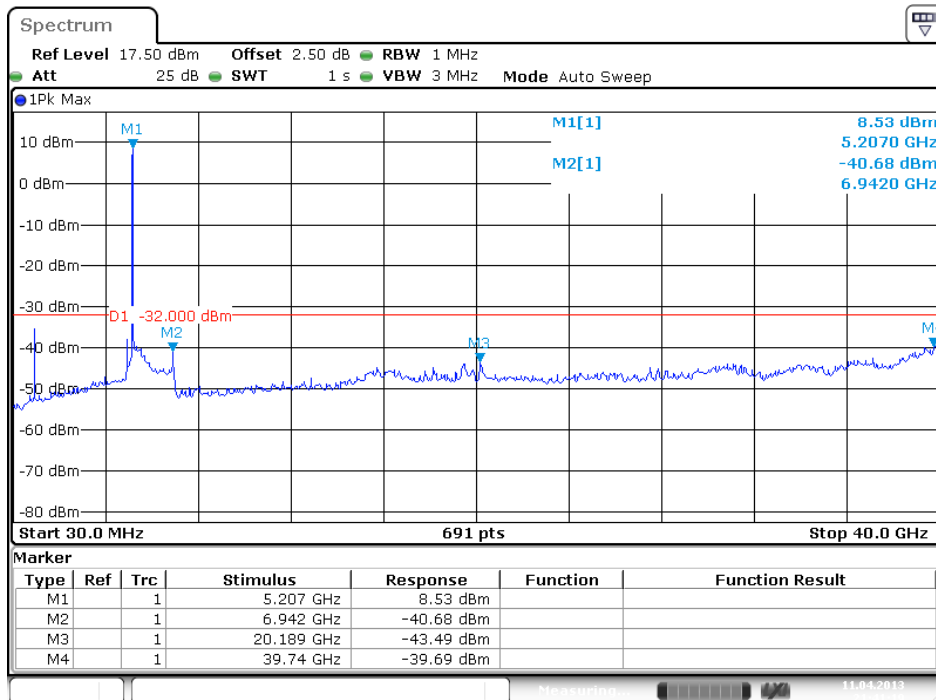




Transmitter Conducted Unwanted Emissions Plot on 5190 MHz, HT-40 / HT-40, STBC, M0

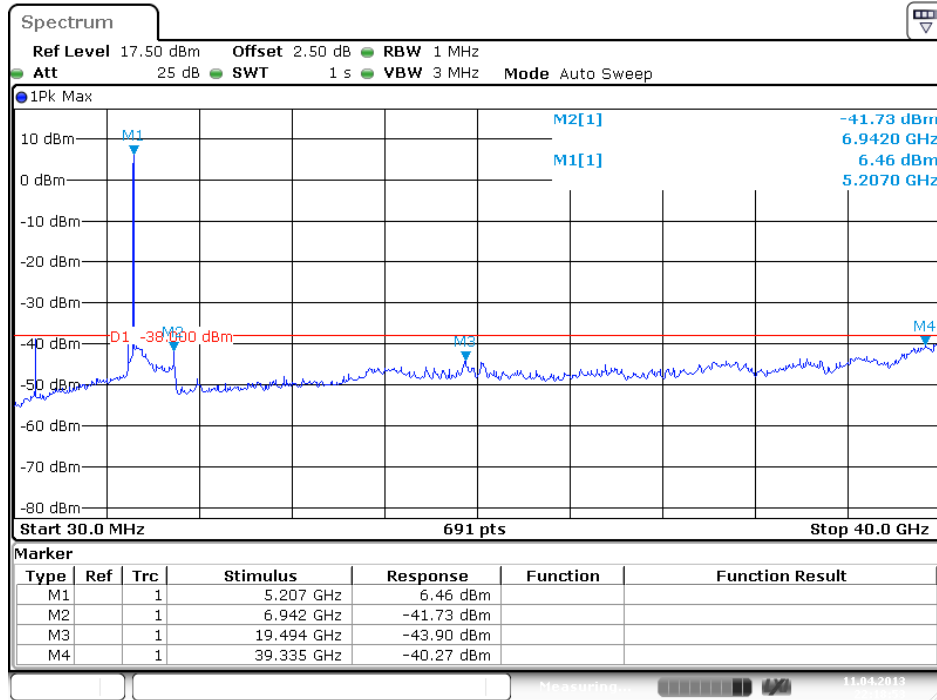

Date: 11.APR.2013 22:18:54


Transmitter Conducted Unwanted Emissions Plot on 5190 MHz, HT-40, Beam Forming, M0, M8

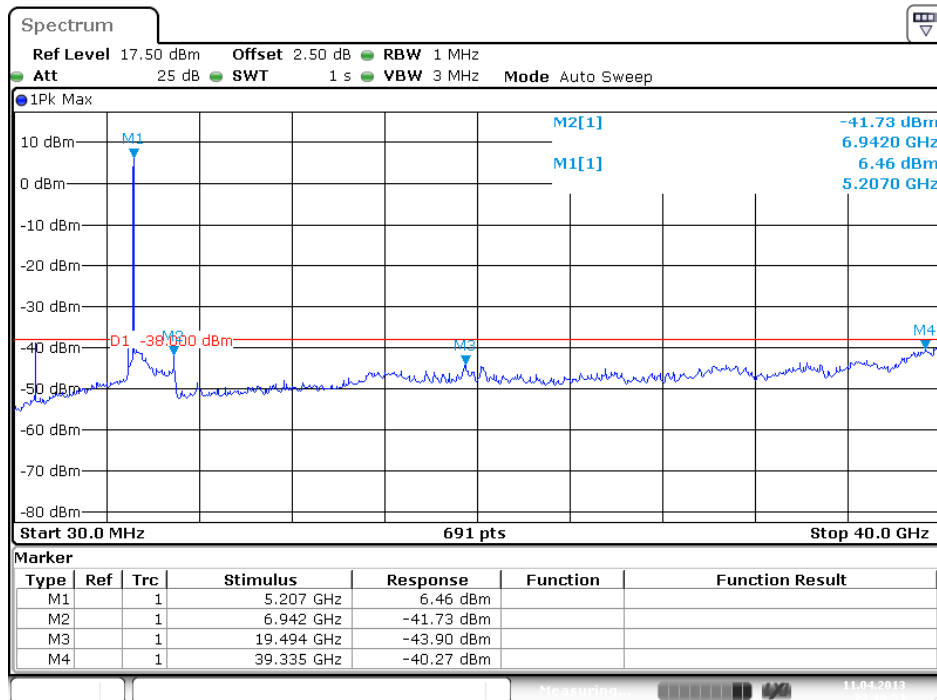


Date: 11.APR.2013 22:18:54



Transmitter Conducted Unwanted Emissions Plot on 5230 MHz, HT-40, M0

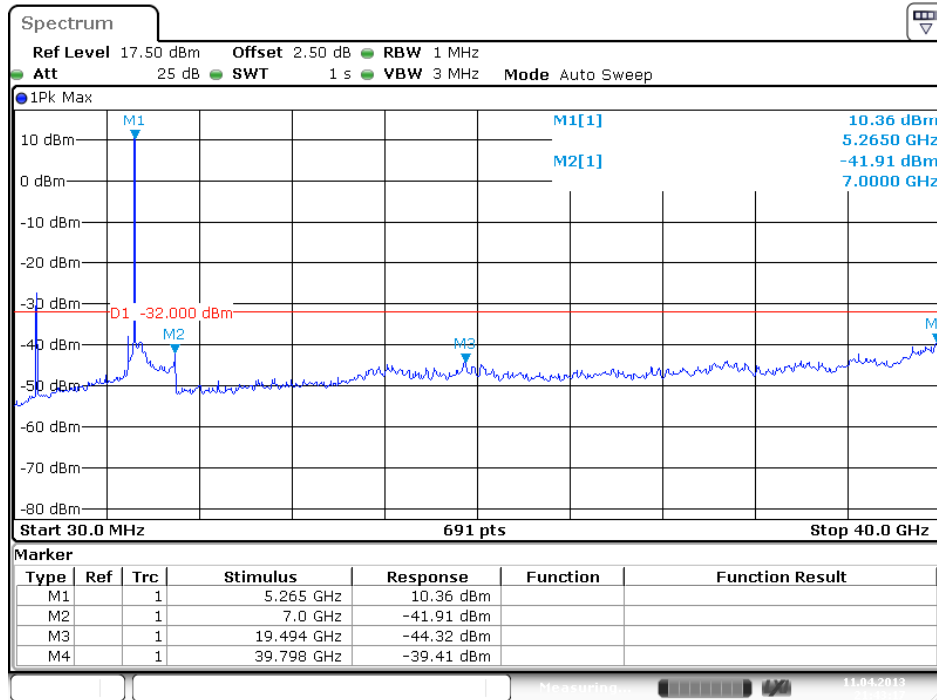


Transmitter Conducted Unwanted Emissions Plot on 5230 MHz, HT-40 / HT-40, STBC, M0

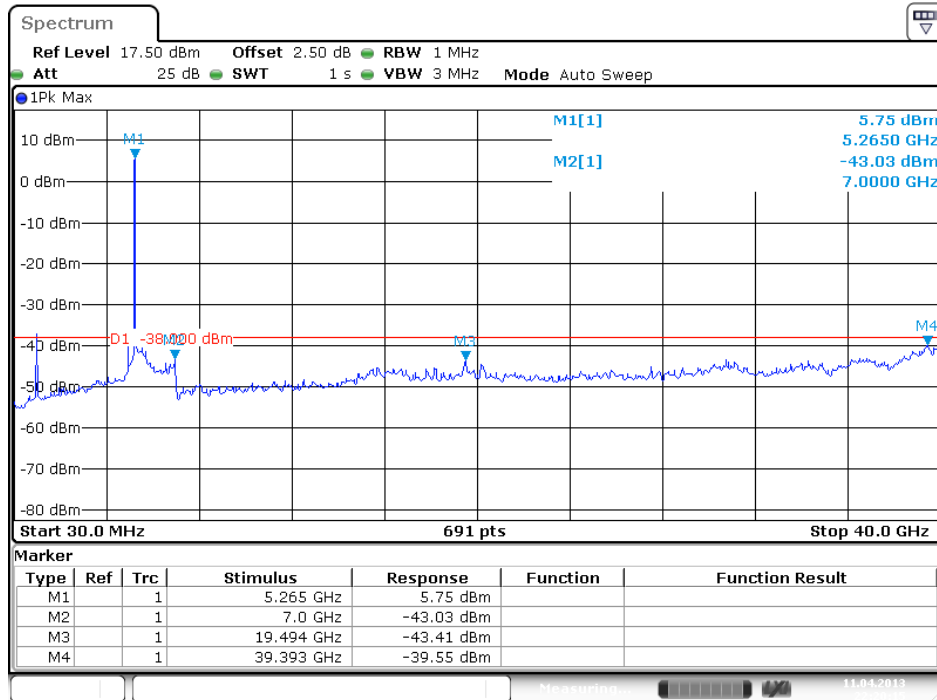



Transmitter Conducted Unwanted Emissions Plot on 5230 MHz, HT-40, Beam Forming, M0, M8

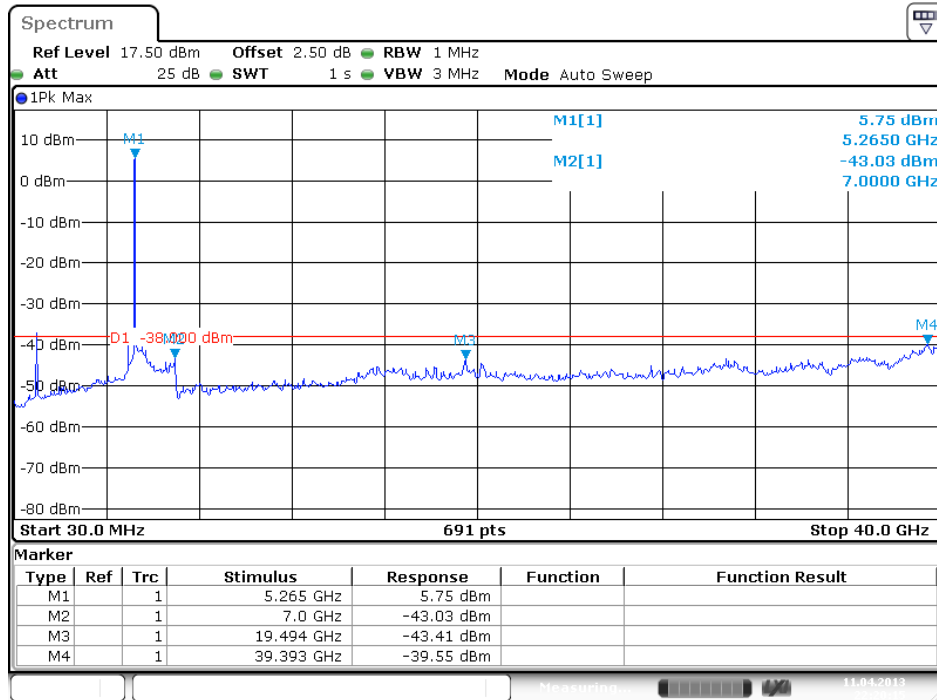

Date: 11.APR.2013 22:20:15

### 3.8 Transmitter Radiated Unwanted Emissions

#### 3.8.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

#### 3.8.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.8.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 1 GHz - 40GHz are typically made at a closer distance 3m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty $\geq$ 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

### 3.8.4 Test Setup

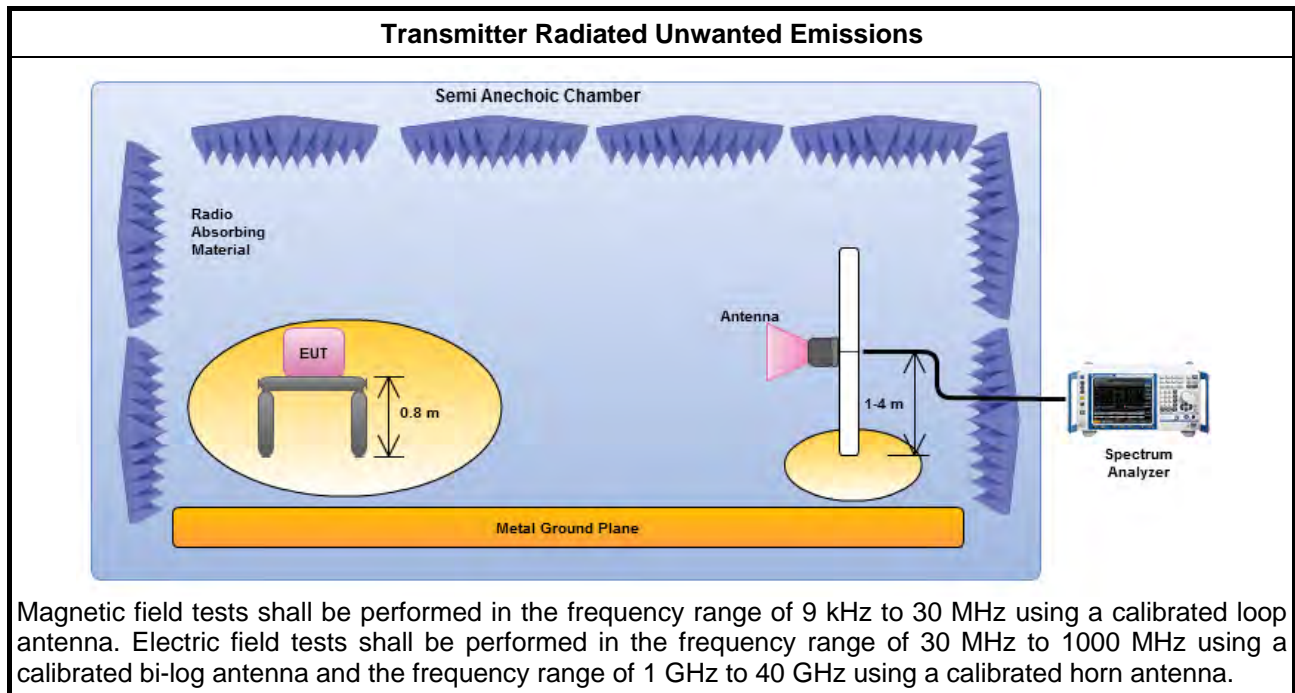


### 3.8.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.






3.8.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

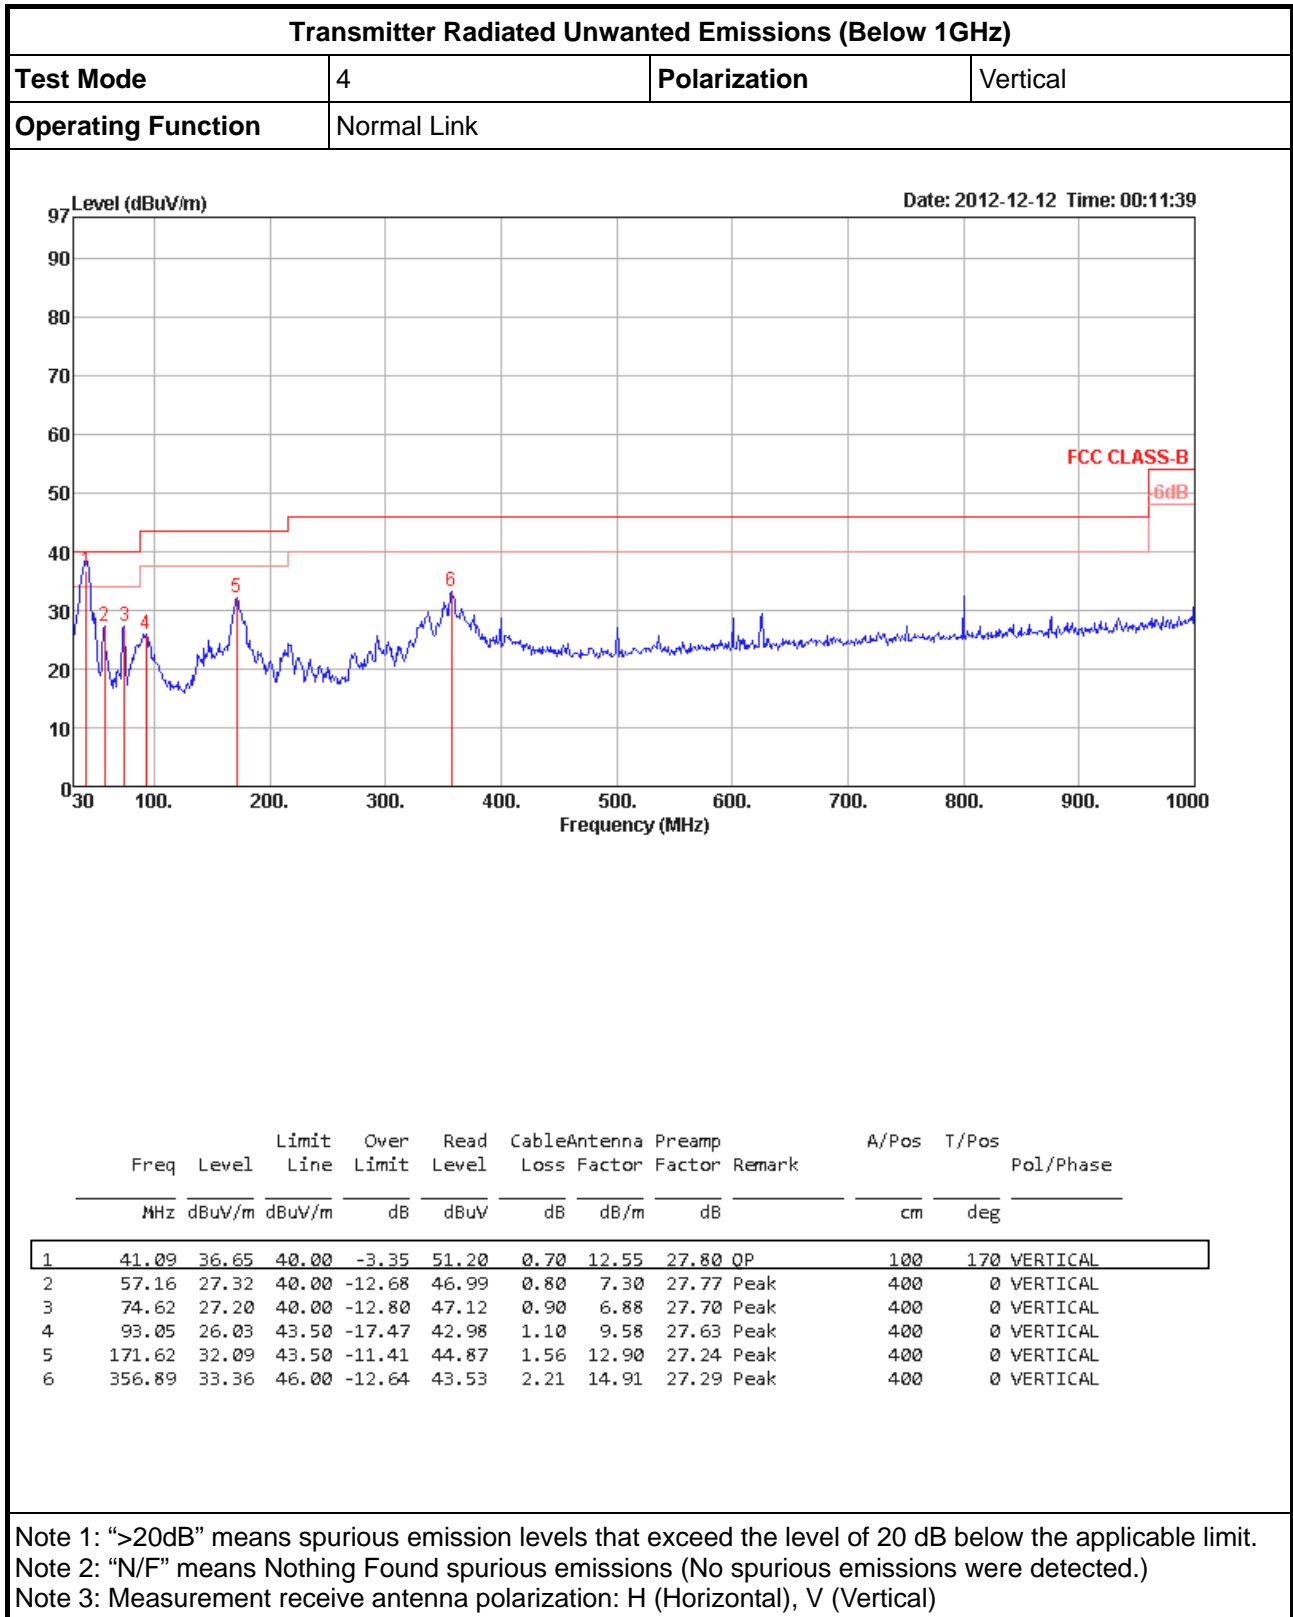



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Test Mode	4	Polarization	Horizontal
Operating Function	Normal Link		

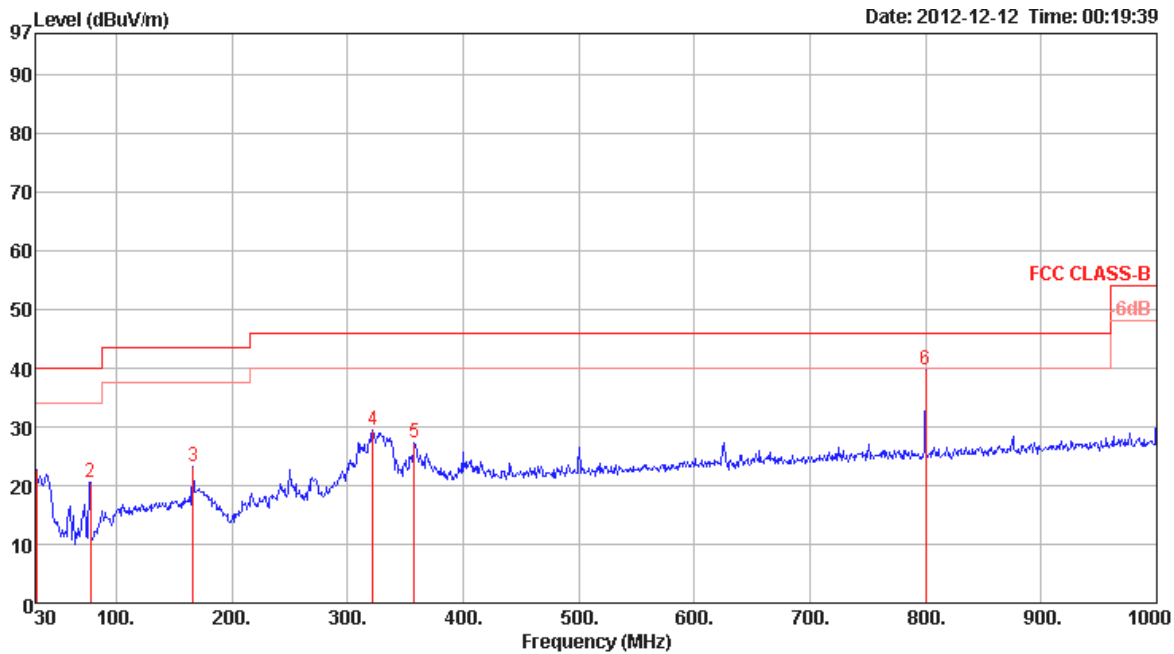

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	30.97	22.61	40.00	-17.39	31.69	0.50	18.22	27.80	Peak	100	0	HORIZONTAL
2	77.53	20.55	40.00	-19.45	40.21	1.00	7.03	27.69	Peak	100	0	HORIZONTAL
3	166.77	23.34	43.50	-20.16	36.54	1.53	12.54	27.27	Peak	100	0	HORIZONTAL
4	321.97	29.56	46.00	-16.44	40.51	2.14	13.96	27.05	Peak	100	0	HORIZONTAL
5	357.86	27.37	46.00	-18.63	37.52	2.22	14.93	27.30	Peak	100	0	HORIZONTAL
6	800.18	39.69	46.00	-6.31	44.22	3.30	19.77	27.60	Peak	100	0	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

**3.8.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)**

**Transmitter Radiated Unwanted Emissions Result - Average**

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Spurious Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	6	46.32	54	7.68
	Non HT-20, 6 to 54Mbps	6	47.17	54	6.83
	Non HT-20, Beam Forming, 6 to 54Mbps	6	47.17	54	6.83
	HT-20, M0 to M7	M0	46.32	54	7.68
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	47.17	54	6.83
	HT-20, Beam Forming, M0 to M7	M0	47.17	54	6.83
	HT-20, Beam Forming, M8 to M15	M8	47.17	54	6.83
5200	Non HT-20, 6 to 54Mbps	6	47.07	54	6.93
	Non HT-20, 6 to 54Mbps	6	45.95	54	8.05
	Non HT-20, Beam Forming, 6 to 54Mbps	6	45.95	54	8.05
	HT-20, M0 to M7	M0	47.07	54	6.93
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	45.95	54	8.05
	HT-20, Beam Forming, M0 to M7	M0	45.95	54	8.05
	HT-20, Beam Forming, M8 to M15	M8	45.95	54	8.05
5240	Non HT-20, 6 to 54Mbps	6	45.97	54	8.03
	Non HT-20, 6 to 54Mbps	6	46.16	54	7.84
	Non HT-20, Beam Forming, 6 to 54Mbps	6	46.16	54	7.84
	HT-20, M0 to M7	M0	45.97	54	8.03
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	46.16	54	7.84
	HT-20, Beam Forming, M0 to M7	M0	46.16	54	7.84
	HT-20, Beam Forming, M8 to M15	M8	46.16	54	7.84
5190	HT-40, M0 to M7	M0	47.64	54	6.36
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	47.23	54	6.77
	HT-40, Beam Forming, M0 to M7	M0	47.23	54	6.77
	HT-40, Beam Forming, M8 to M15	M8	47.23	54	6.77
5230	HT-40, M0 to M7	M0	46.76	54	7.24
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	46.1	54	7.9
	HT-40, Beam Forming, M0 to M7	M0	46.1	54	7.9
	HT-40, Beam Forming, M8 to M15	M8	46.1	54	7.9




Transmitter Radiated Unwanted Emissions Result - Peak

Freq. (MHz)	Operating Mode	Data Rate (Mbps)	Spurious Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5180	Non HT-20, 6 to 54Mbps	6	59.32	74	14.68
	Non HT-20, 6 to 54Mbps	6	58.63	74	15.37
	Non HT-20, Beam Forming, 6 to 54Mbps	6	58.63	74	15.37
	HT-20, M0 to M7	M0	59.32	74	14.68
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	58.63	74	15.37
	HT-20, Beam Forming, M0 to M7	M0	58.63	74	15.37
	HT-20, Beam Forming, M8 to M15	M8	58.63	74	15.37
5200	Non HT-20, 6 to 54Mbps	6	58.77	74	15.23
	Non HT-20, 6 to 54Mbps	6	58.33	74	15.67
	Non HT-20, Beam Forming, 6 to 54Mbps	6	58.33	74	15.67
	HT-20, M0 to M7	M0	58.77	74	15.23
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	58.33	74	15.67
	HT-20, Beam Forming, M0 to M7	M0	58.33	74	15.67
	HT-20, Beam Forming, M8 to M15	M8	58.33	74	15.67
5240	Non HT-20, 6 to 54Mbps	6	58.46	74	15.54
	Non HT-20, 6 to 54Mbps	6	58.69	74	15.31
	Non HT-20, Beam Forming, 6 to 54Mbps	6	58.69	74	15.31
	HT-20, M0 to M7	M0	58.46	74	15.54
	HT-20, M0 to M15 / HT-20, STBC, M0 to M7	M0	58.69	74	15.31
	HT-20, Beam Forming, M0 to M7	M0	58.69	74	15.31
	HT-20, Beam Forming, M8 to M15	M8	58.69	74	15.31
5190	HT-40, M0 to M7	M0	58.87	74	15.13
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	57.8	74	16.2
	HT-40, Beam Forming, M0 to M7	M0	57.8	74	16.2
	HT-40, Beam Forming, M8 to M15	M8	57.8	74	16.2
5230	HT-40, M0 to M7	M0	58.48	74	15.52
	HT-40, M0 to M15 / HT-40, STBC, M0 to M7	M0	58.44	74	15.56
	HT-40, Beam Forming, M0 to M7	M0	58.44	74	15.56
	HT-40, Beam Forming, M8 to M15	M8	58.44	74	15.56




**Transmitter Radiated Unwanted Emissions Worst Plots (Above 1GHz)**  
**Only test maximum power of operating mode for low, middle, high channel.**

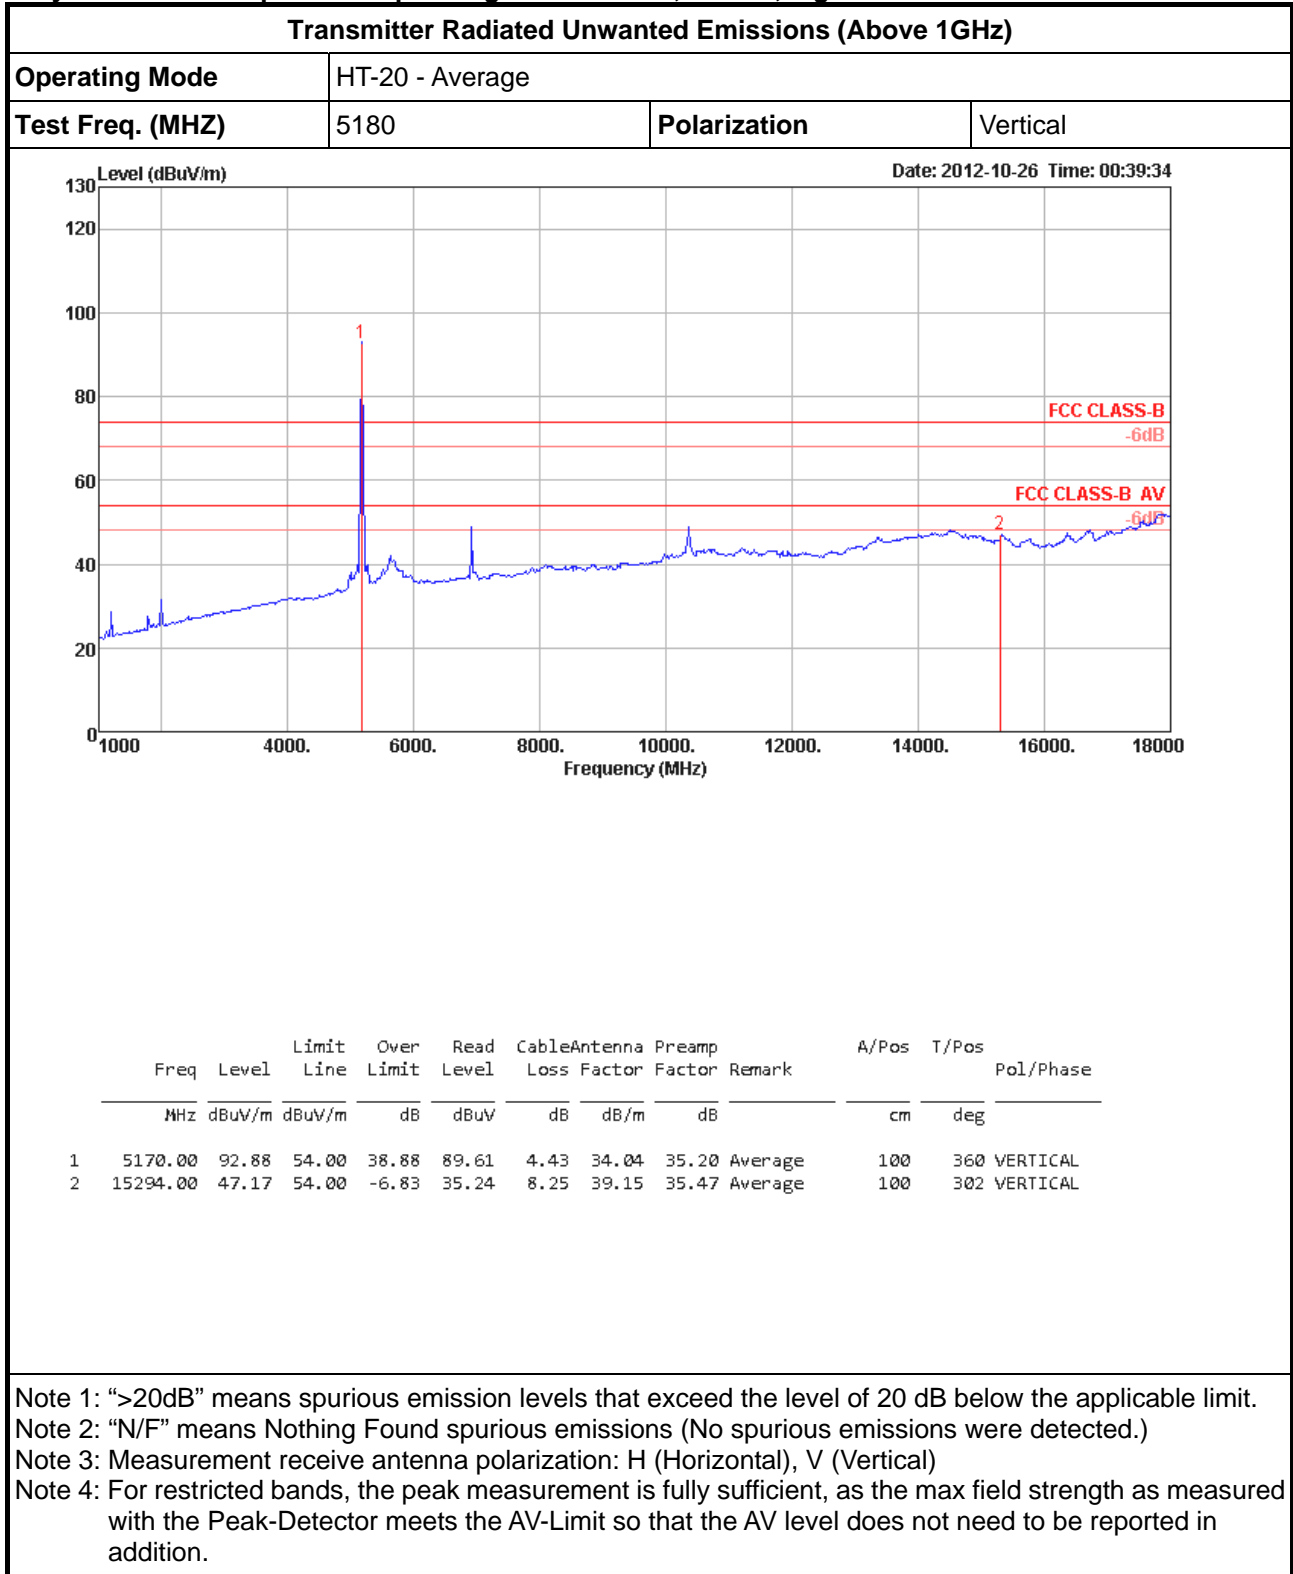



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Average		
Test Freq. (MHZ)	5180	Polarization	Horizontal

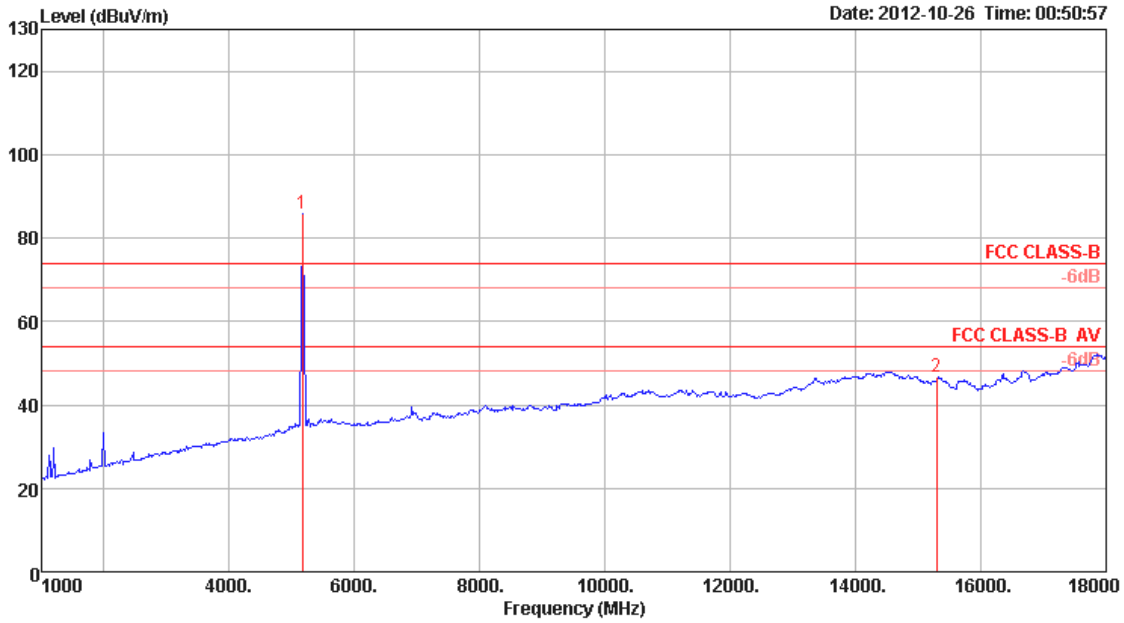


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5170.00	85.72	54.00	31.72	82.45	4.43	34.04	35.20	Average	100	0	HORIZONTAL
2	15294.00	46.87	54.00	-7.13	34.94	8.25	39.15	35.47	Average	100	198	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Average		
Test Freq. (MHZ)	5180	Polarization	Vertical

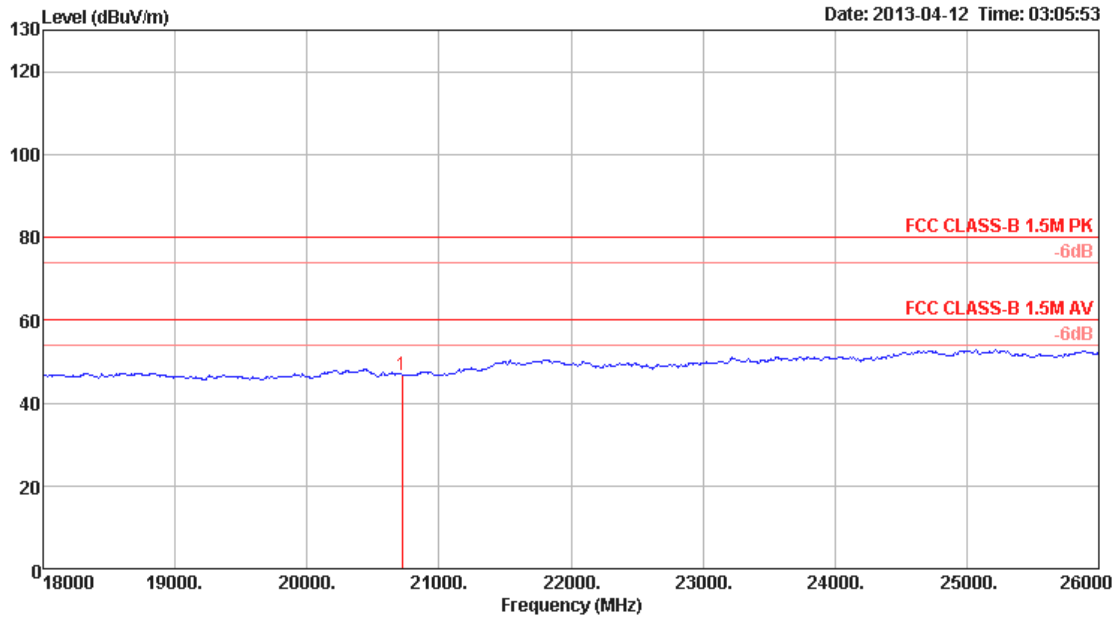


1	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	20720.00	46.83	60.00	-13.17	31.25	13.84	37.44	35.70 Average	100	22	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Average		
Test Freq. (MHZ)	5180	Polarization	Horizontal

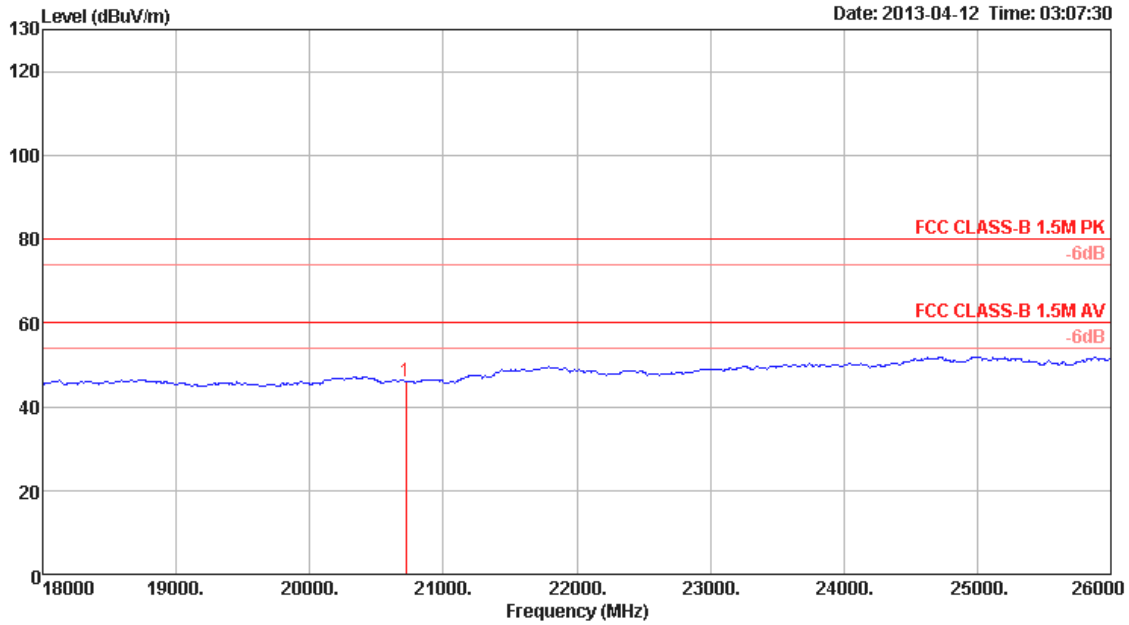

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	20720.00	46.03	60.00	-13.97	30.45	13.84	37.44	35.70 Average	100	274	HORIZONTAL


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Average		
Test Freq. (MHZ)	5180	Polarization	Vertical

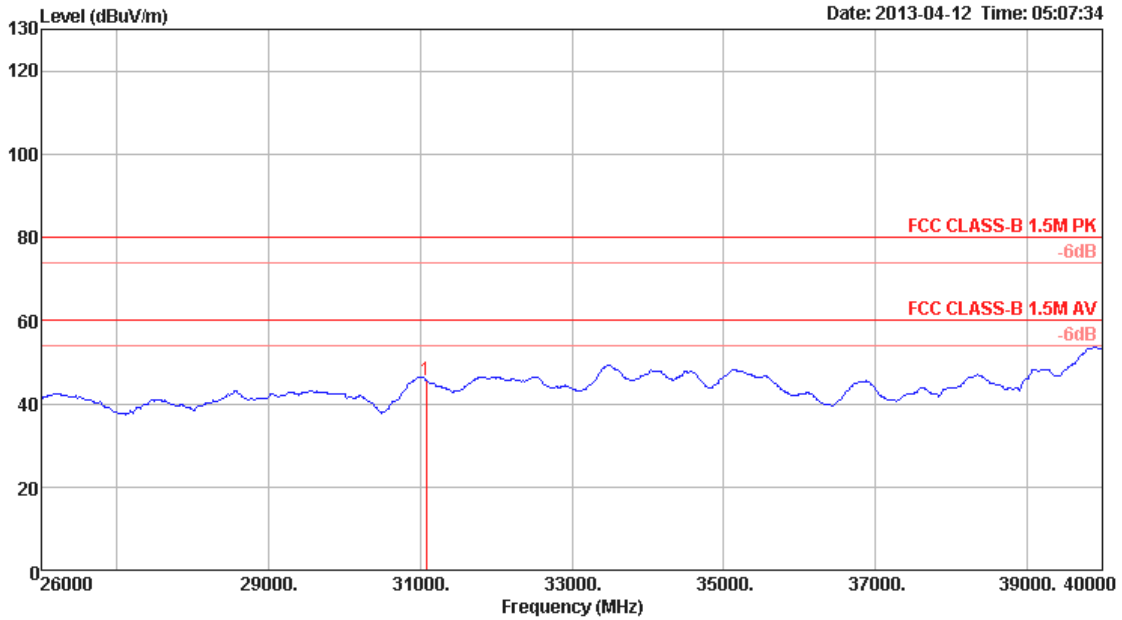


Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Loss	Factor	Factor	Remark	A/Pos	T/Pos	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				cm	deg	
1	31080.00	45.66	60.00	-14.34	33.57	11.51	40.08	39.50	Average		100	131	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Average		
Test Freq. (MHZ)	5180	Polarization	Horizontal

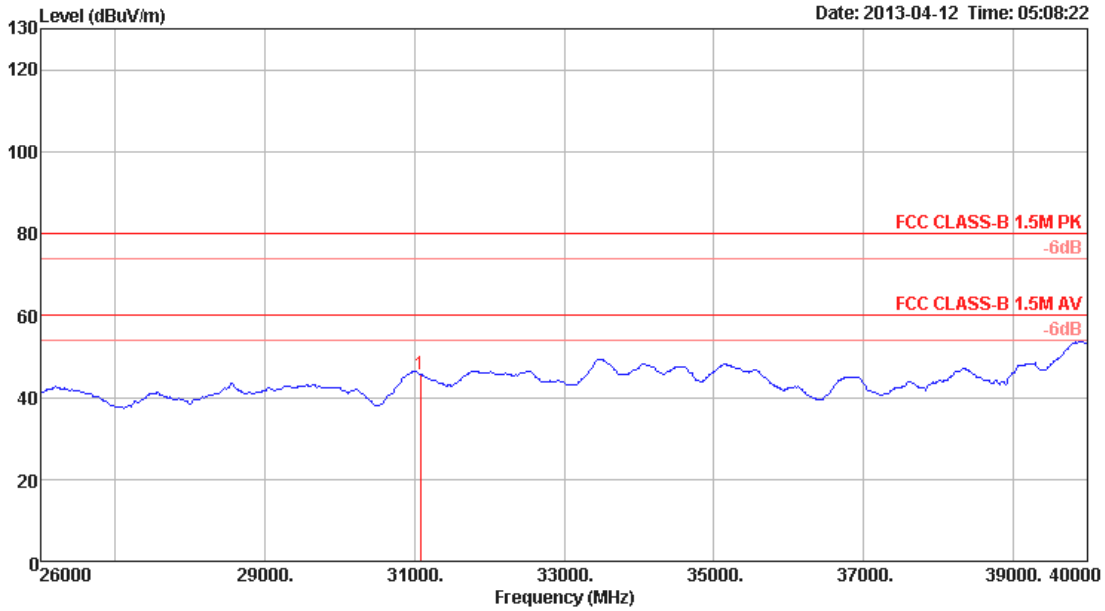


1	31080.00	45.49	60.00	-14.51	33.40	11.51	40.08	39.50	Average	100	63	HORIZONTAL
---	----------	-------	-------	--------	-------	-------	-------	-------	---------	-----	----	------------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Peak		
Test Freq. (MHZ)	5180	Polarization	Vertical

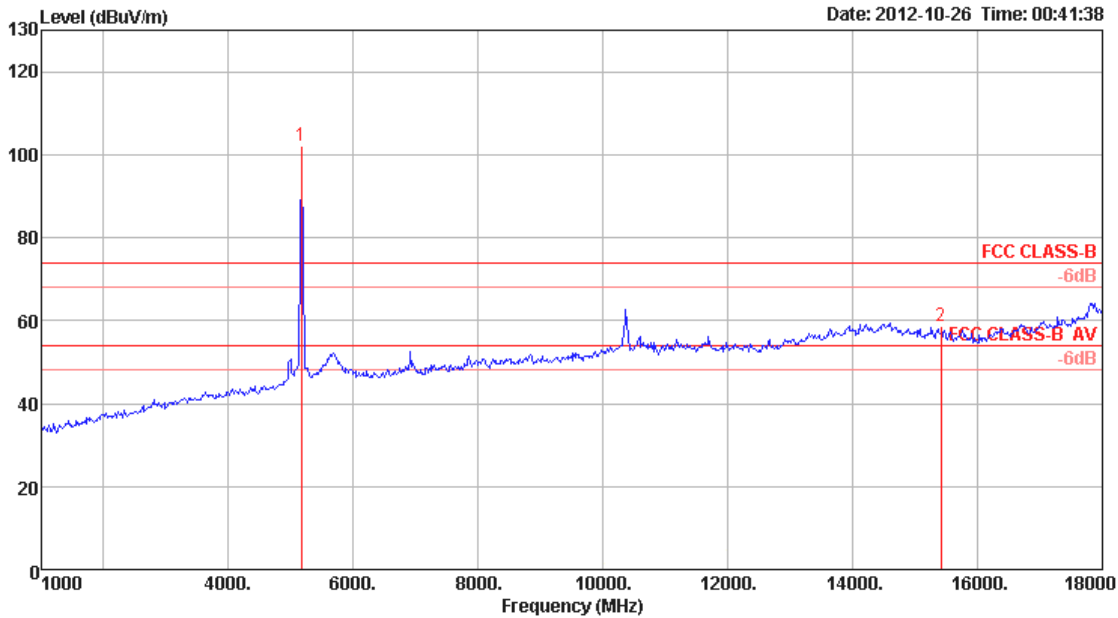


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5170.00	101.99	74.00	27.99	98.72	4.43	34.04	35.20	Peak	100	360	VERTICAL
2	15417.00	58.63	74.00	-15.37	47.34	8.24	38.60	35.55	Peak	100	302	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Peak		
Test Freq. (MHZ)	5180	Polarization	Horizontal

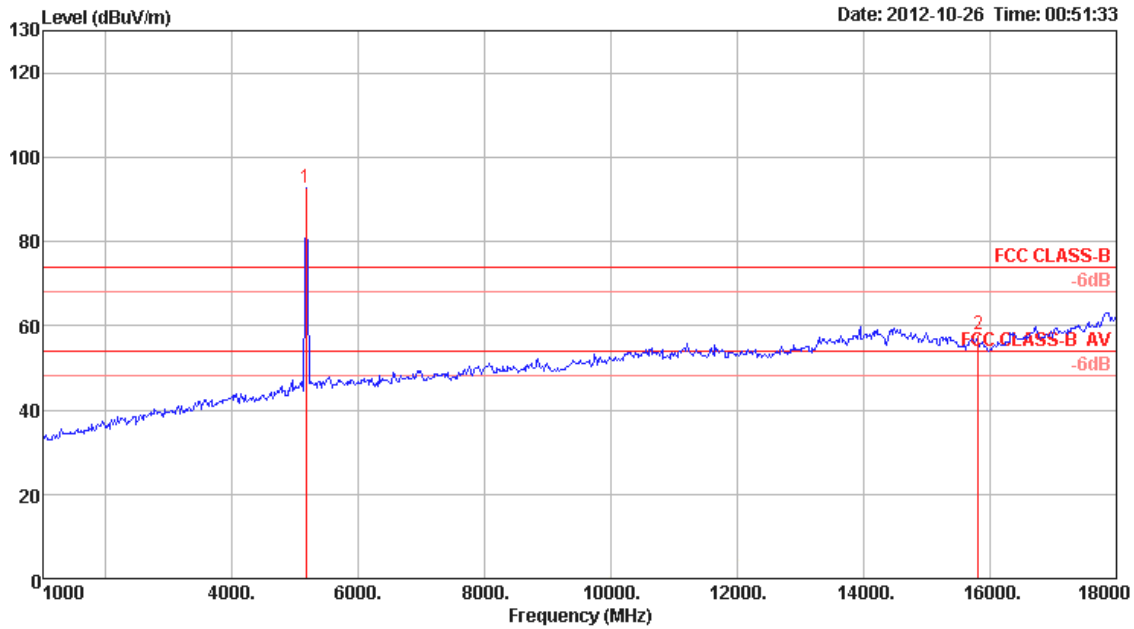


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5170.00	92.66	74.00	18.66	89.39	4.43	34.04	35.20	Peak	100	0	HORIZONTAL
2	15811.00	57.76	74.00	-16.24	47.05	8.56	37.69	35.54	Peak	100	198	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Peak		
Test Freq. (MHZ)	5180	Polarization	Vertical

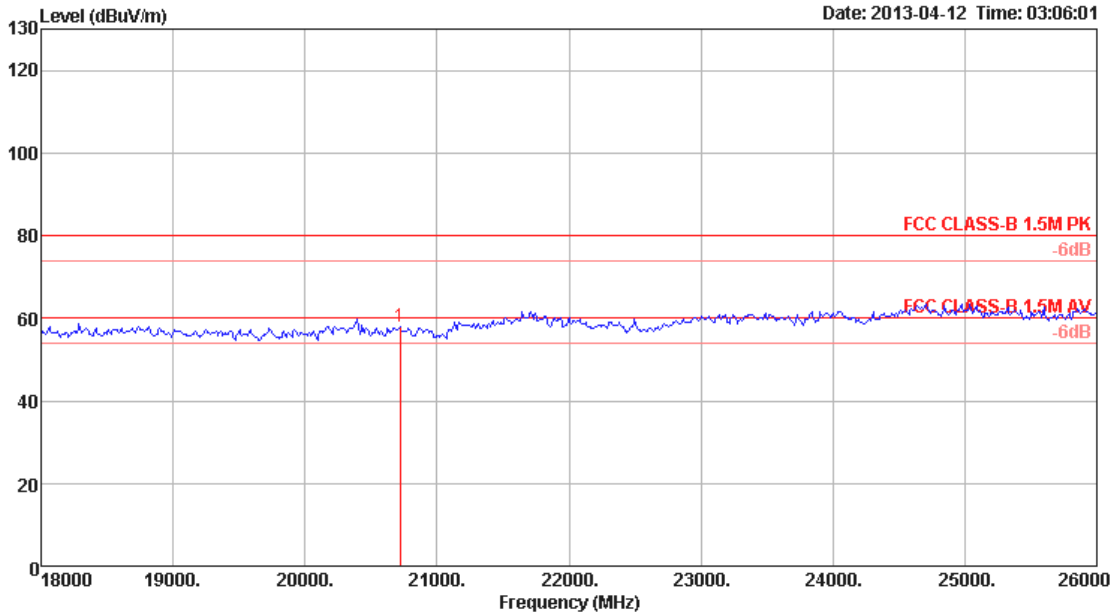


1	20720.00	57.84	80.00	-22.16	42.26	13.84	37.44	35.70	Peak	100	22	VERTICAL
---	----------	-------	-------	--------	-------	-------	-------	-------	------	-----	----	----------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Peak		
Test Freq. (MHZ)	5180	Polarization	Horizontal

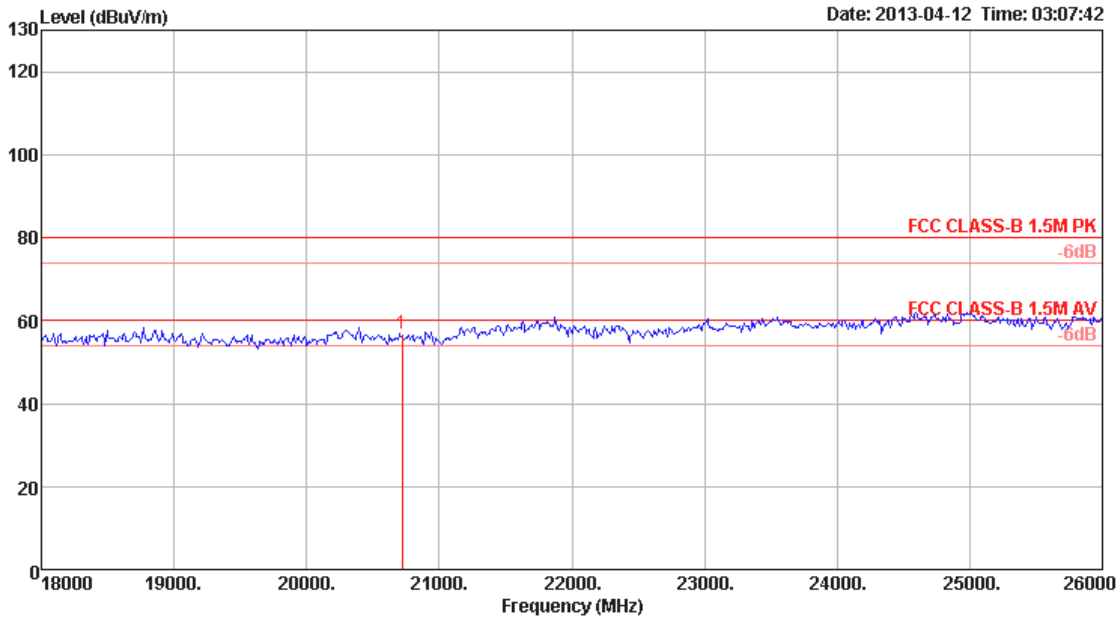


1	20720.00	56.75	80.00	-23.25	41.17	13.84	37.44	35.70	Peak	100	274	HORIZONTAL
---	----------	-------	-------	--------	-------	-------	-------	-------	------	-----	-----	------------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Peak		
Test Freq. (MHZ)	5180	Polarization	Vertical

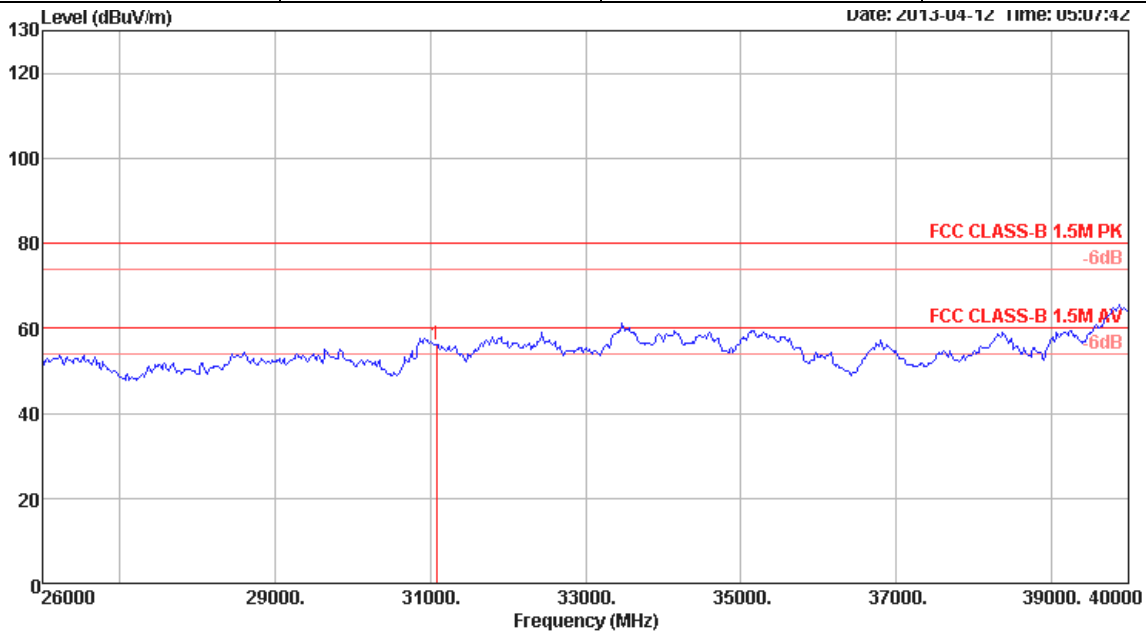


1	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	31080.00	55.97	80.00	-24.03	43.88	11.51	40.08	39.50 Peak	100	131	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20 - Peak		
Test Freq. (MHZ)	5180	Polarization	Horizontal

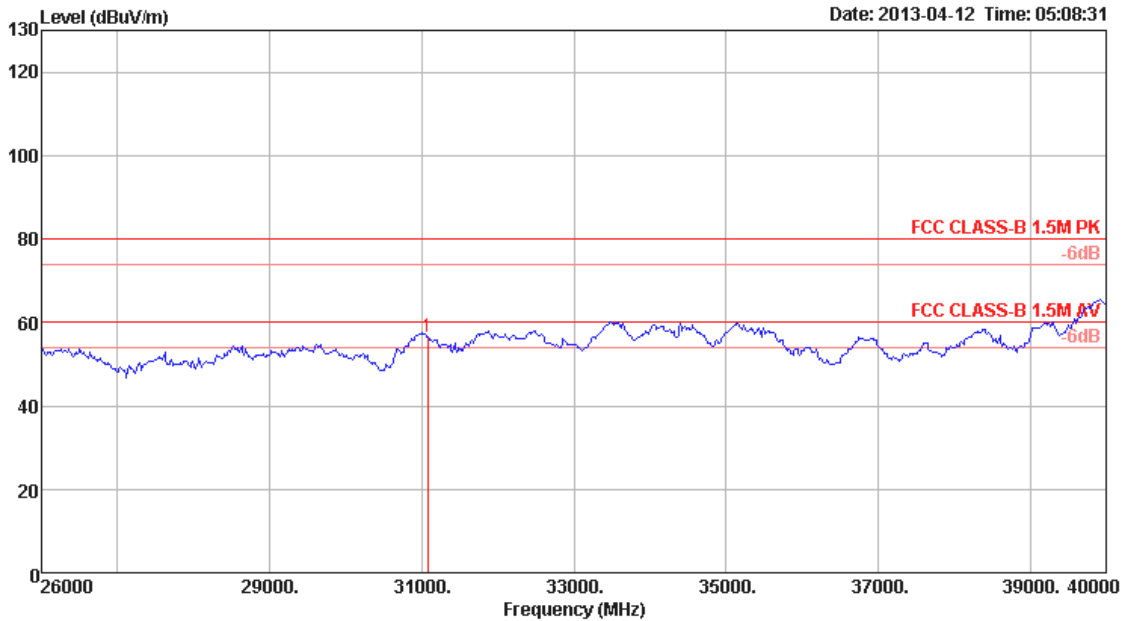

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
MHz	dBUV/m	dBUV/m	dB	dBUV	dB	dB/m	dB		cm	deg	
1	31080.00	56.42	80.00	-23.58	44.33	11.51	40.08	39.50 Peak	100	63	HORIZONTAL


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5200	Polarization	Vertical

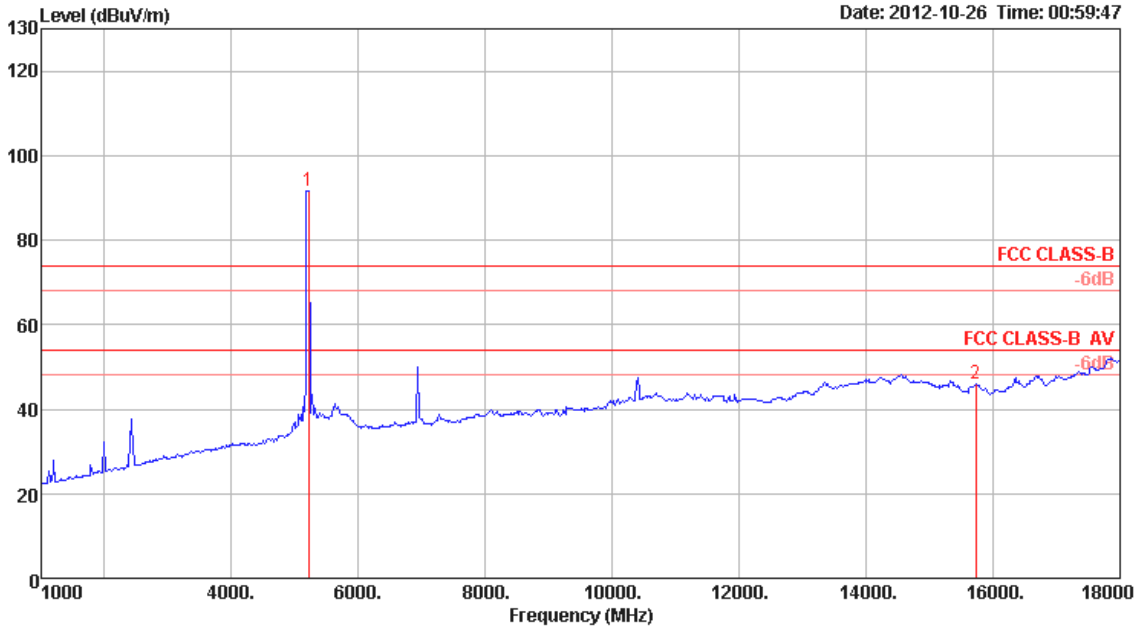


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5219.00	91.60	54.00	37.60	88.22	4.43	34.15	35.20	Average	100	360	VERTICAL
2	15723.00	45.93	54.00	-8.07	35.19	8.45	37.85	35.56	Average	100	360	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5200	Polarization	Horizontal

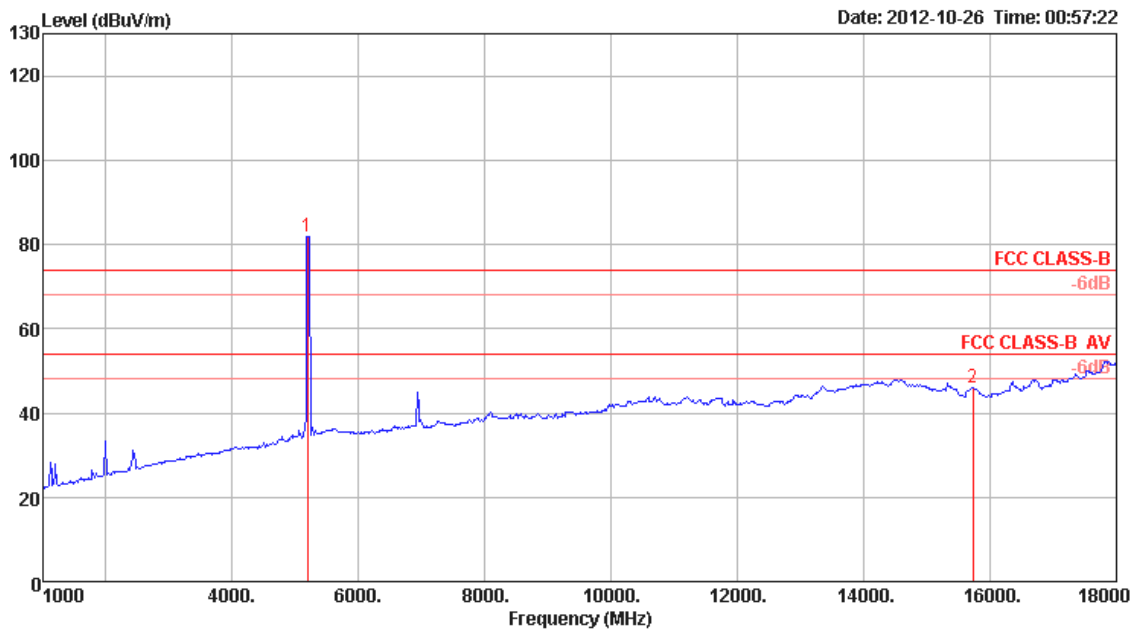


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5195.00	82.02	54.00	28.02	78.68	4.43	34.11	35.20	Average	100	0 HORIZONTAL
2	15723.00	45.95	54.00	-8.05	35.21	8.45	37.85	35.56	Average	100	111 HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5200	Polarization	Vertical

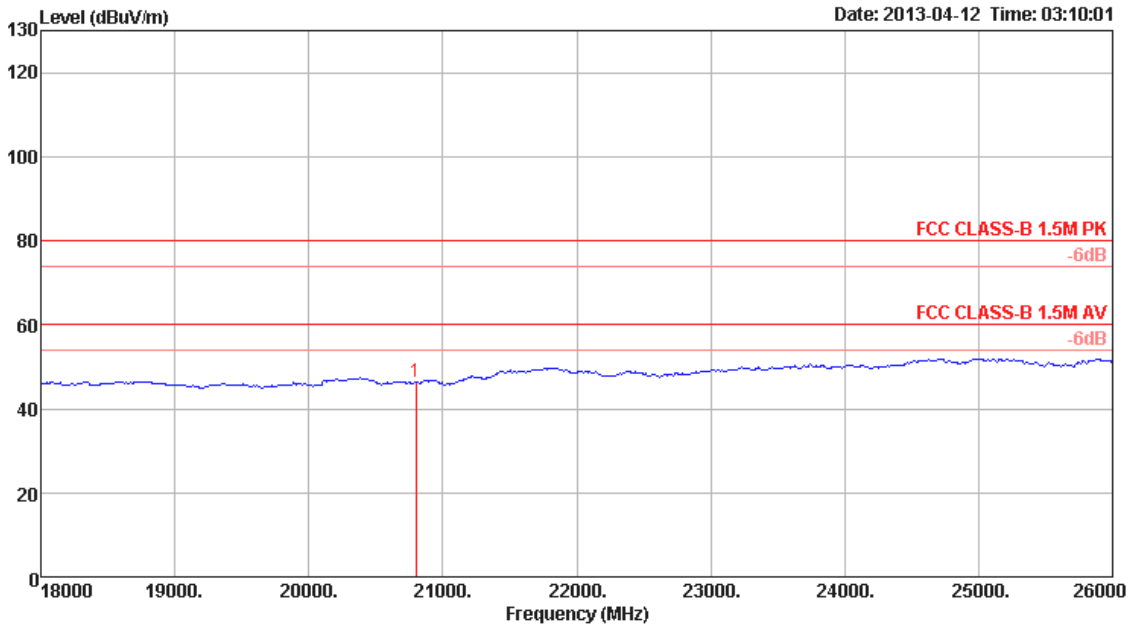


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	20880.00	46.19	60.00	-13.81	30.58	13.85	37.46	35.70	Average	100	248 VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5200	Polarization	Horizontal

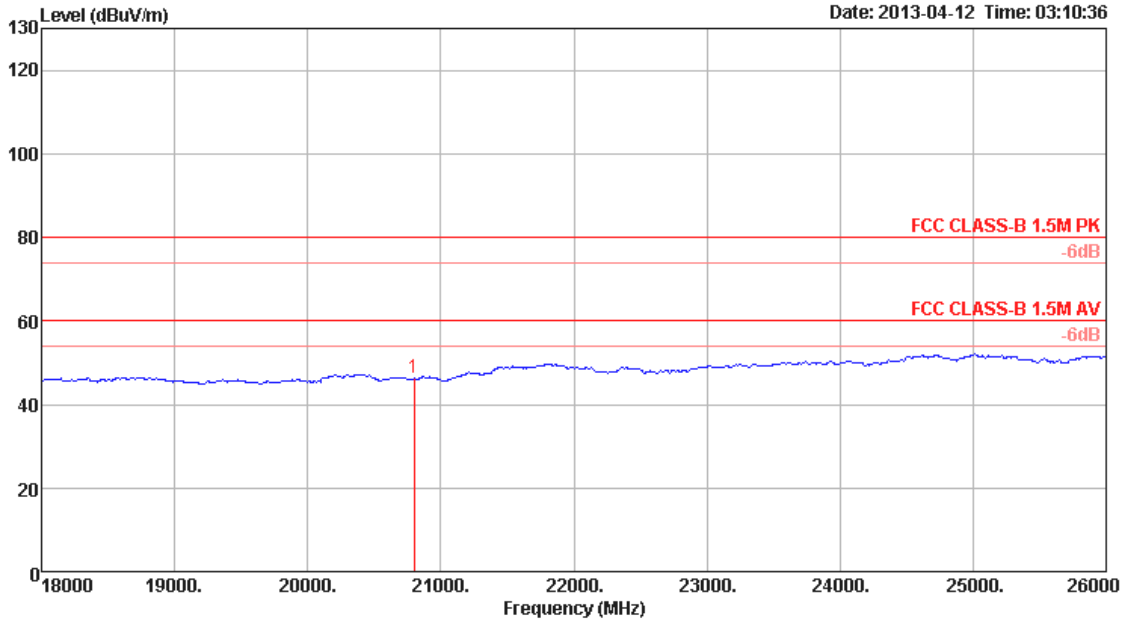


Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
MHz	dBUV/m	dBUV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	20800.00	46.20	60.00	-13.80	30.59	13.85	37.46	35.70	Average	100 186 HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5200	Polarization	Vertical

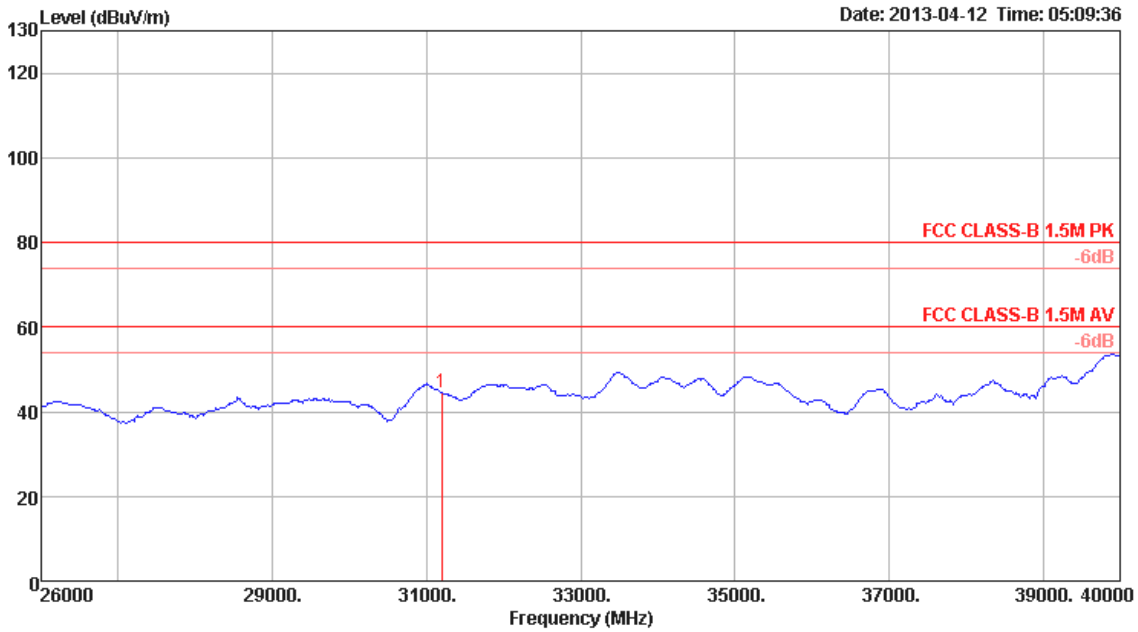


1	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31200.00	44.43	60.00	-15.57	32.84	11.56	40.06	40.03	Average	100	74	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5200	Polarization	Horizontal

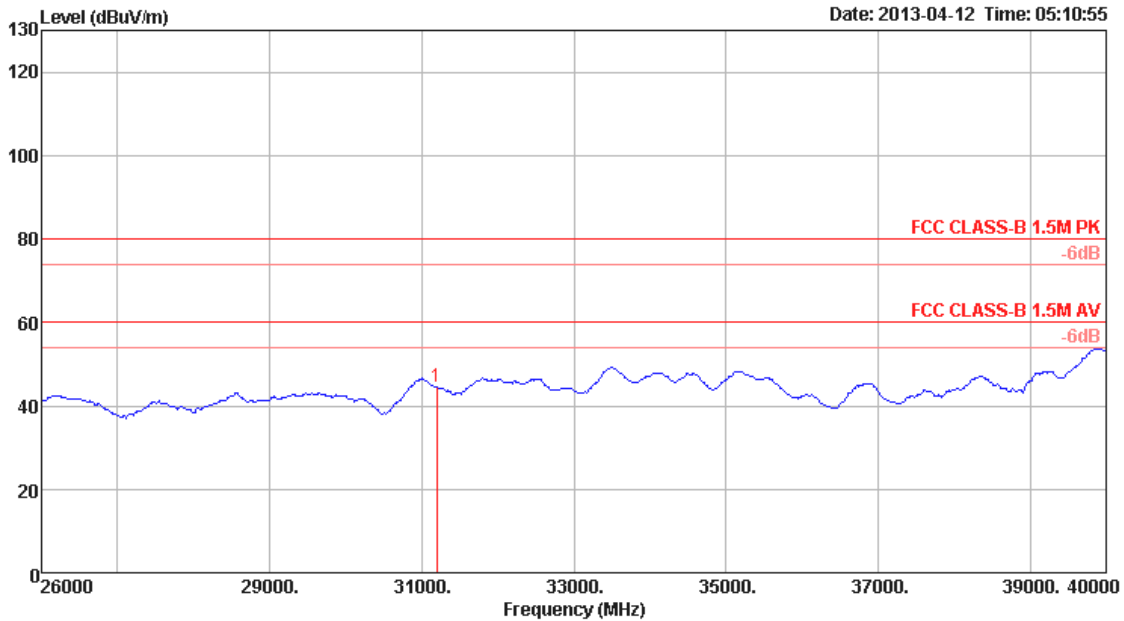


Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg		
1	31200.00	44.42	60.00	-15.58	32.83	11.56	40.06	40.03	Average	100	172	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5200	Polarization	Vertical

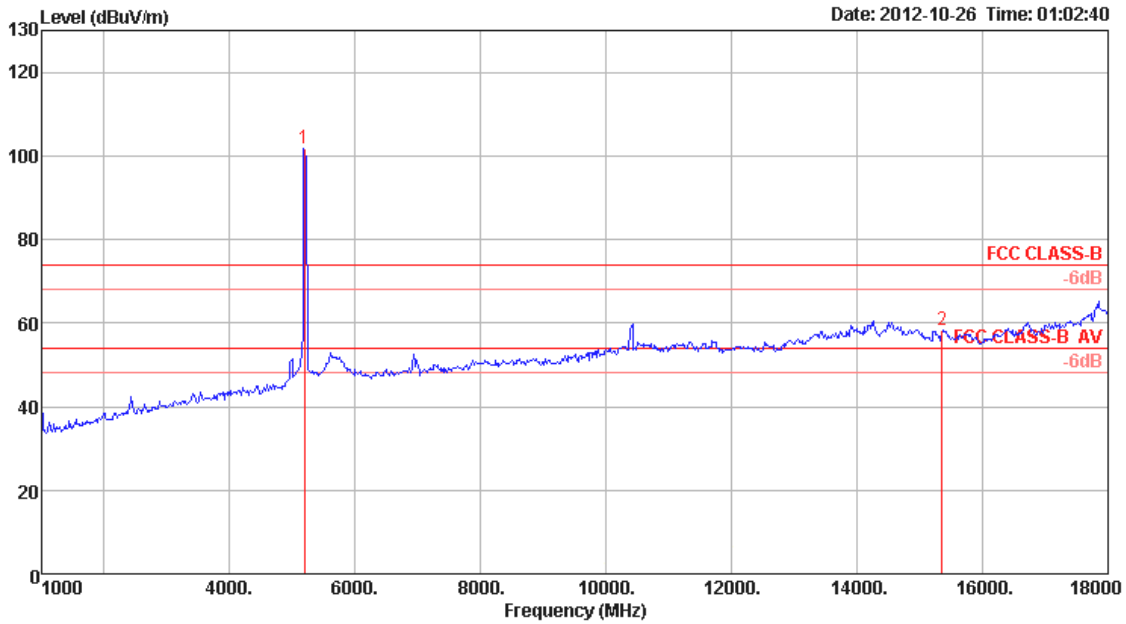


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5195.00	101.69	74.00	27.69	98.35	4.43	34.11	35.20	Peak	100	360	VERTICAL
2	15354.00	58.33	74.00	-15.67	46.78	8.24	38.83	35.52	Peak	100	360	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5200	Polarization	Horizontal

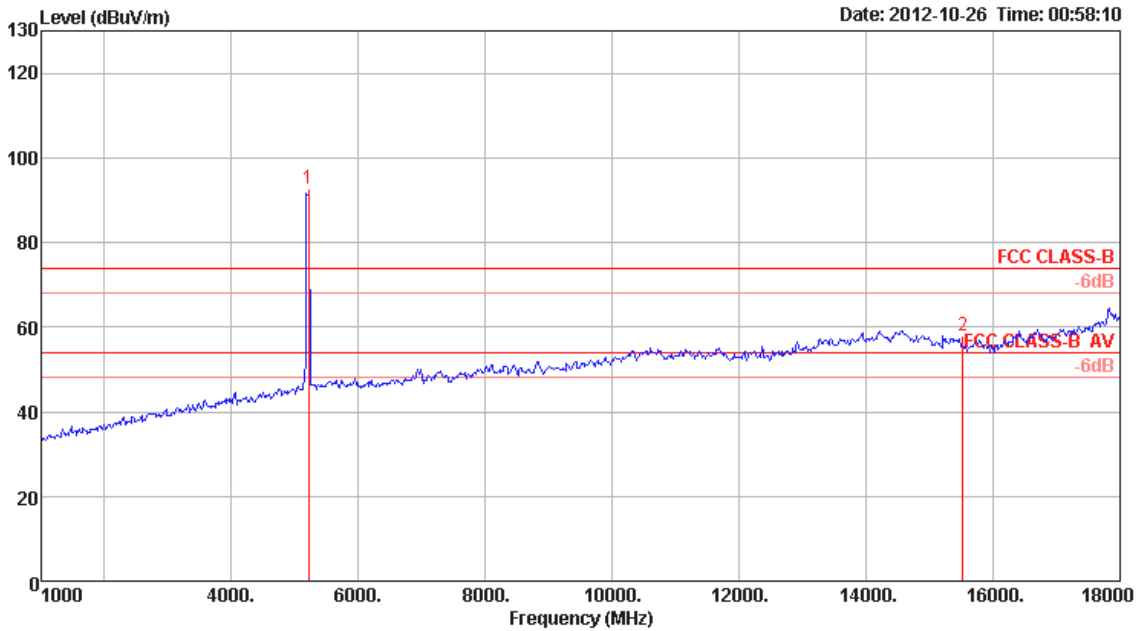

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5219.00	92.78	74.00	18.78	89.40	4.43	34.15	35.20	Peak	100	0	HORIZONTAL
2	15526.00	58.01	74.00	-15.99	47.19	8.26	38.15	35.59	Peak	100	111	HORIZONTAL


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5200	Polarization	Vertical

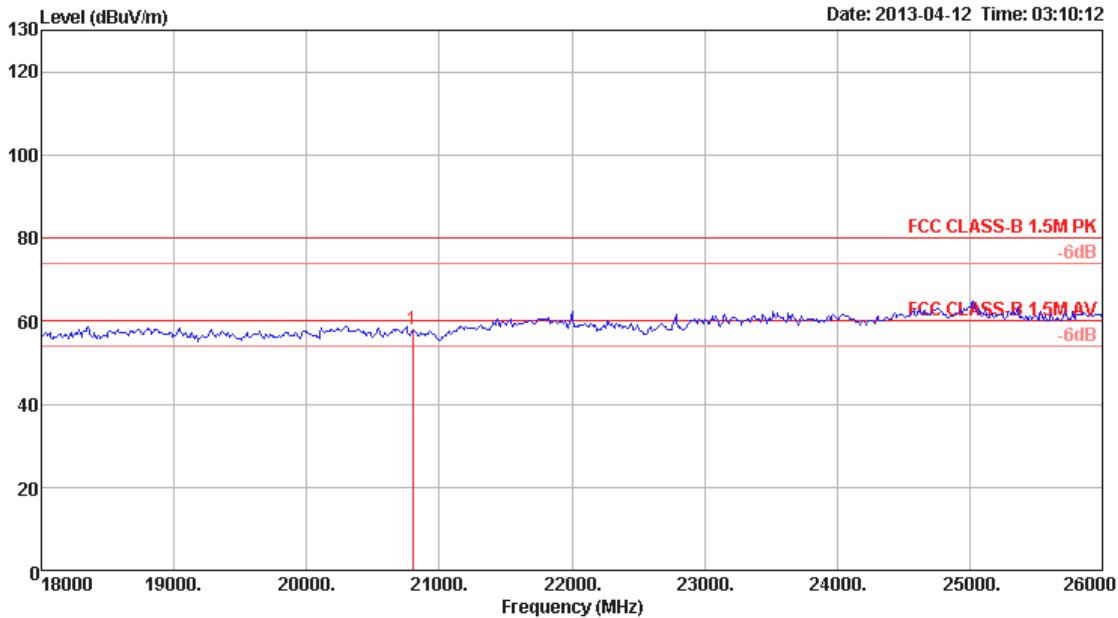


1	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	20800.00	57.81	80.00	-22.19	42.20	13.85	37.46	35.70 Peak	100	248	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5200	Polarization	Horizontal

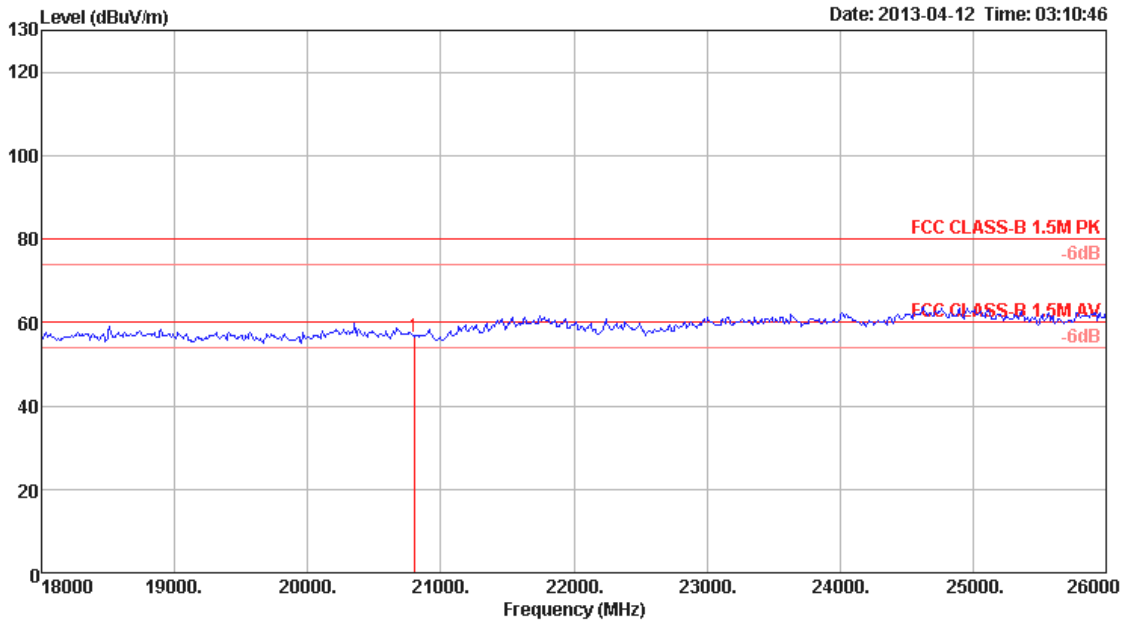


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB	dB/m	dB		cm	deg	
1	20800.00	56.54	80.00	-23.46	40.93	13.85	37.46	35.70	Peak	100	186	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5200	Polarization	Vertical

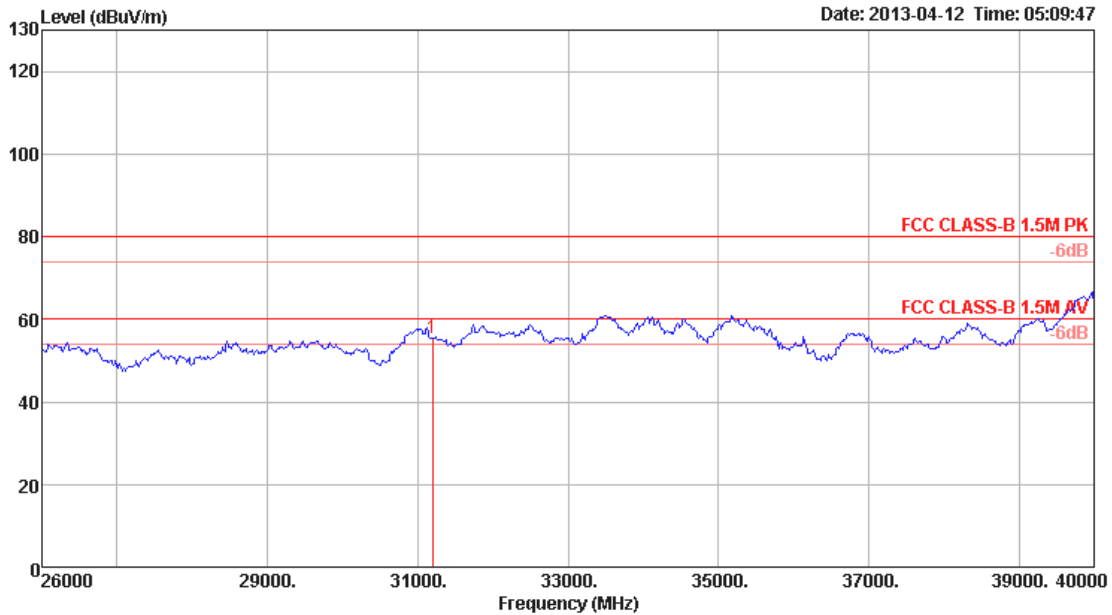


1	31200.00	55.29	80.00	-24.71	43.70	11.56	40.06	40.03	Peak	100	74	VERTICAL
Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase				
dB	dB	dB	dB	dB	cm	deg						

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5200	Polarization	Horizontal

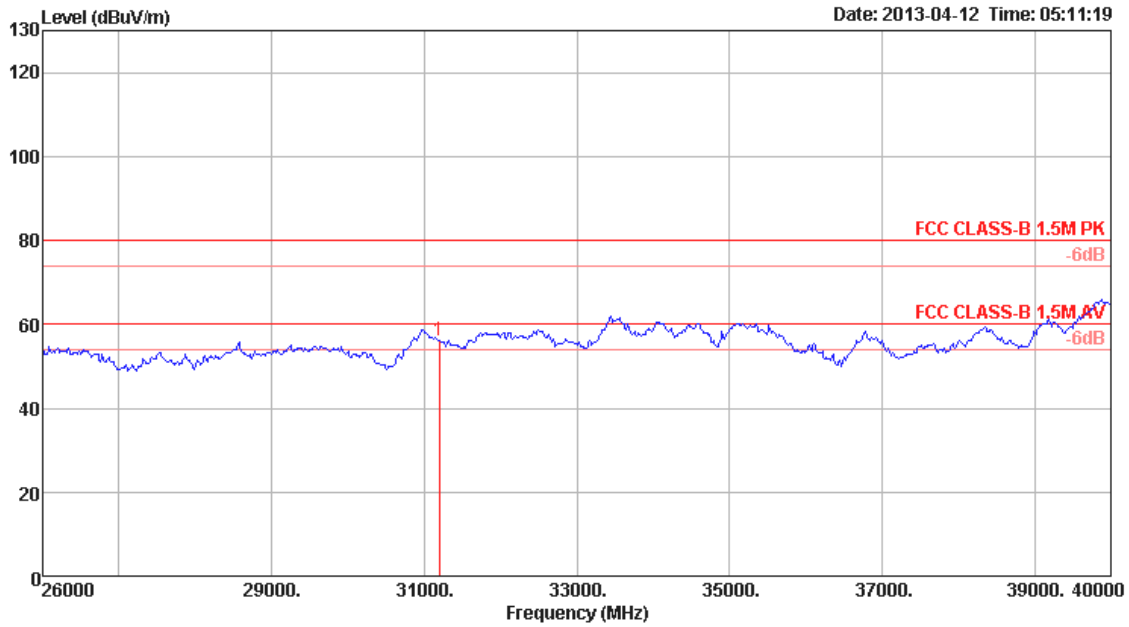


1	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31200.00	55.99	80.00	-24.01	44.40	11.56	40.06	40.03	Peak	100	172	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5240	Polarization	Vertical

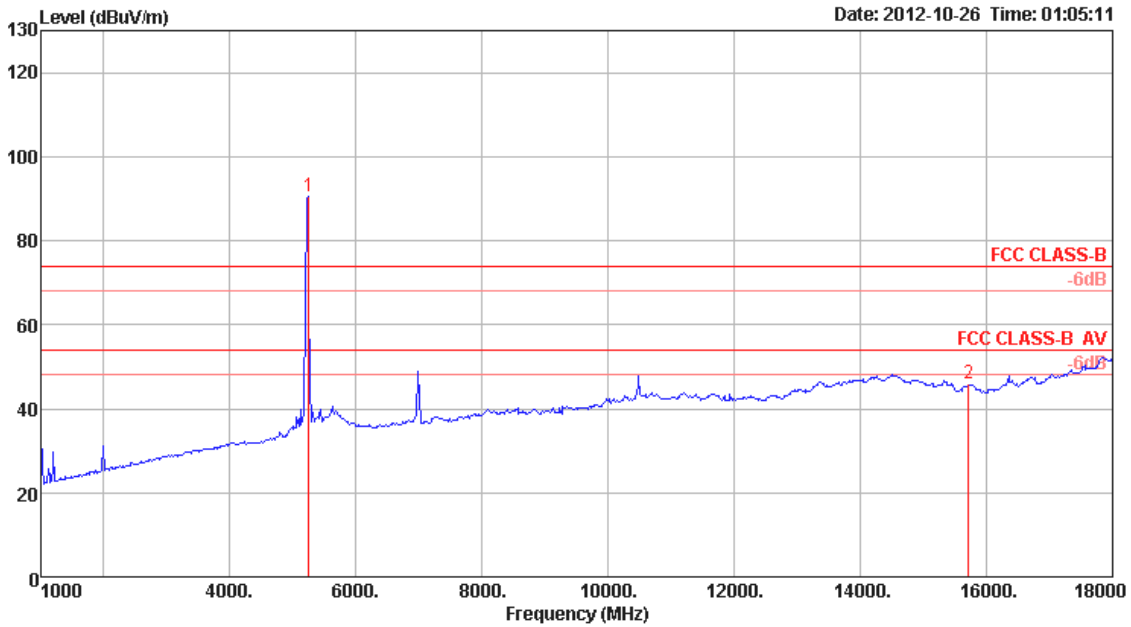


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			
1	5244.00	90.69	54.00	36.69	87.29	4.42	34.18	35.20	Average	100	0 VERTICAL
2	15720.00	45.82	54.00	-8.18	35.08	8.45	37.85	35.56	Average	100	154 VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5240	Polarization	Horizontal

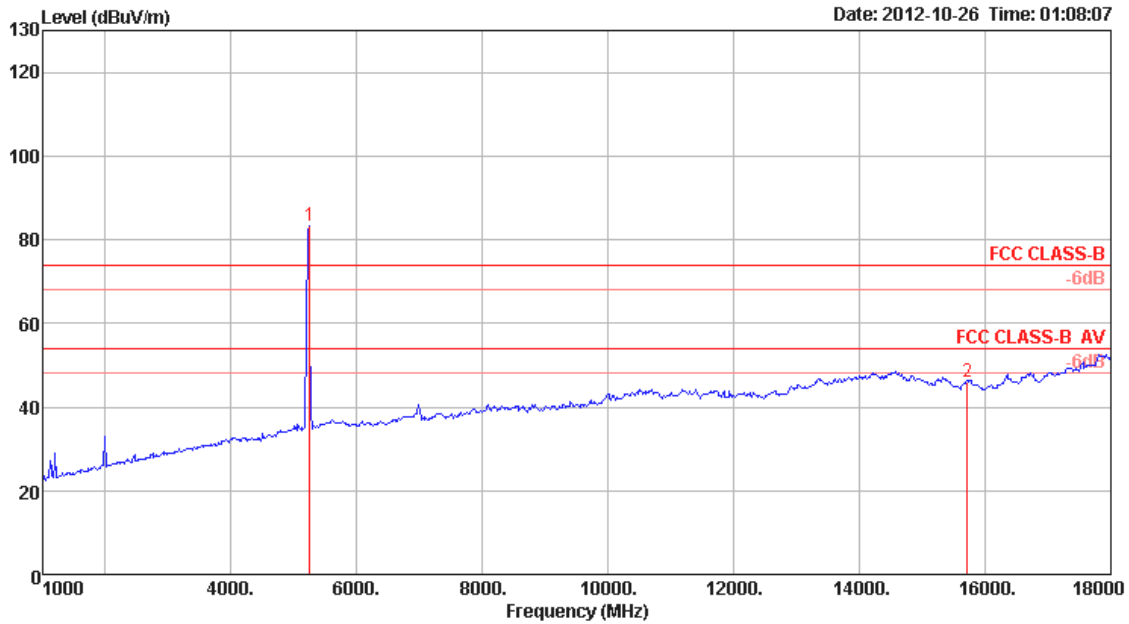


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5244.00	83.28	54.00	29.28	79.88	4.42	34.18	35.20	Average	100	0	HORIZONTAL
2	15720.00	46.16	54.00	-7.84	35.42	8.45	37.85	35.56	Average	100	321	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5240	Polarization	Vertical

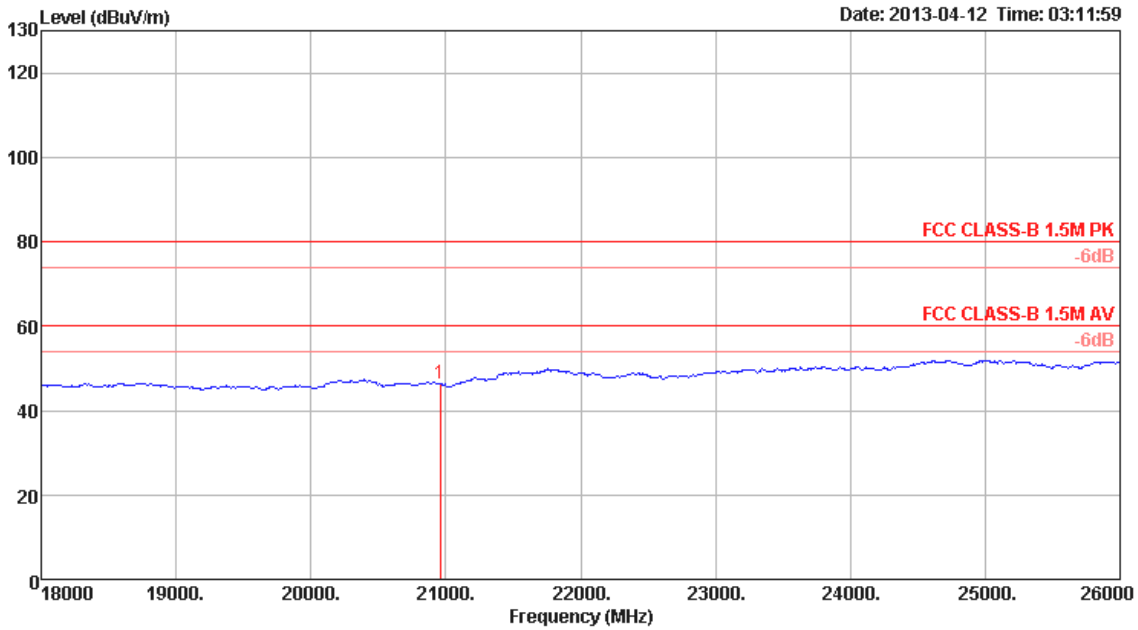


1	20960.00	46.41	60.00	-13.59	30.76	13.86	37.49	35.70	Average	100	126	VERTICAL
---	----------	-------	-------	--------	-------	-------	-------	-------	---------	-----	-----	----------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5240	Polarization	Horizontal

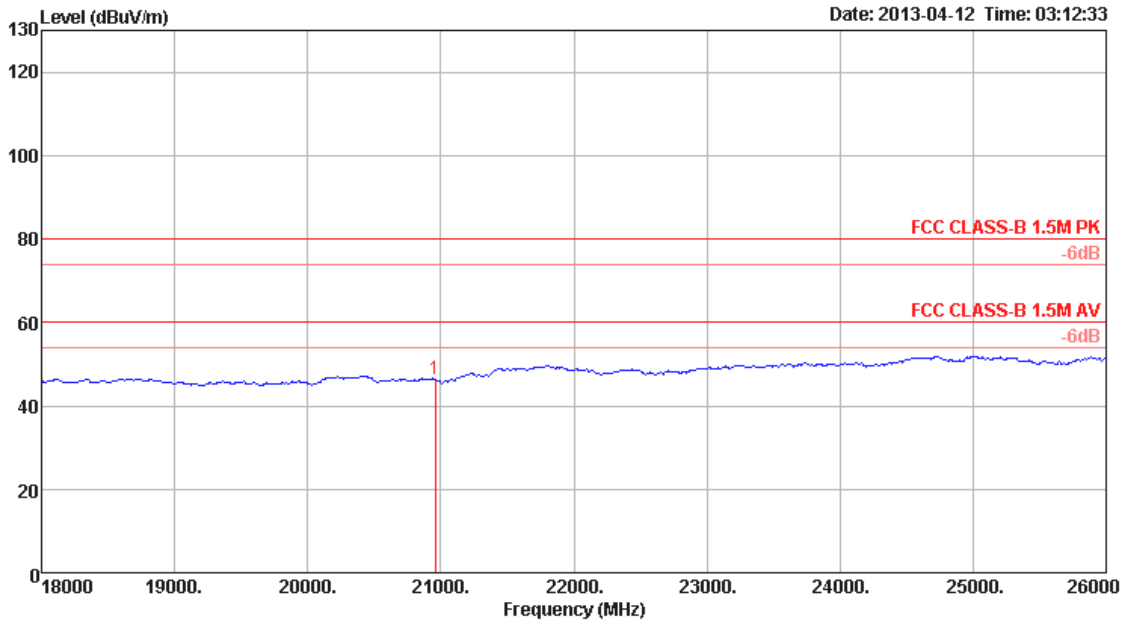

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
MHz	dBUV/m	dBUV/m	dB	dBUV	dB	dB/m	dB		cm	deg		
1	20960.00	46.35	60.00	-13.65	30.70	13.86	37.49	35.70	Average	100	234	HORIZONTAL


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5240	Polarization	Vertical

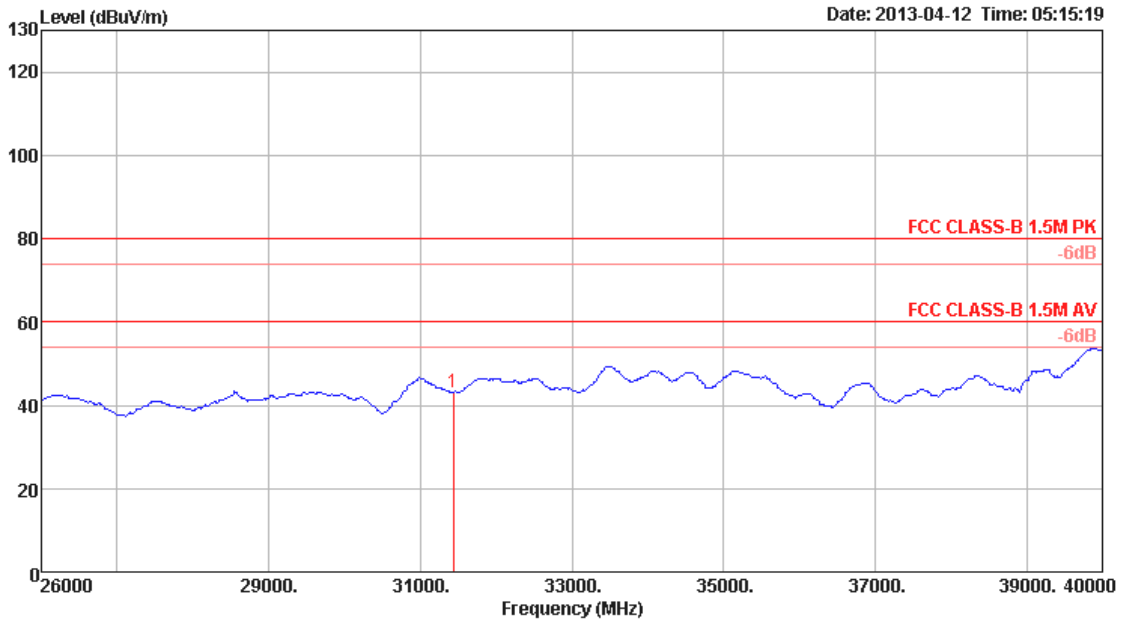


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31440.00	43.14	60.00	-16.86	32.67	11.68	40.01	41.22	Average	100	164	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Average		
Test Freq. (MHZ)	5240	Polarization	Horizontal

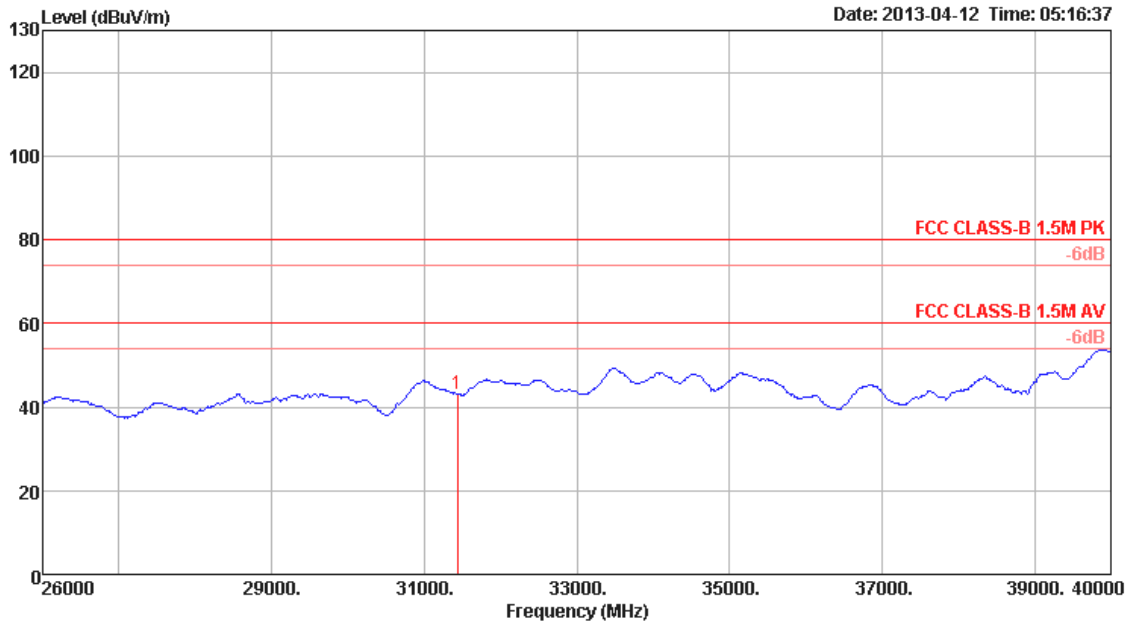


Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 31440.00	42.97	60.00	-17.03	32.50	11.68	40.01	41.22	Average	100	38 HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5240	Polarization	Vertical

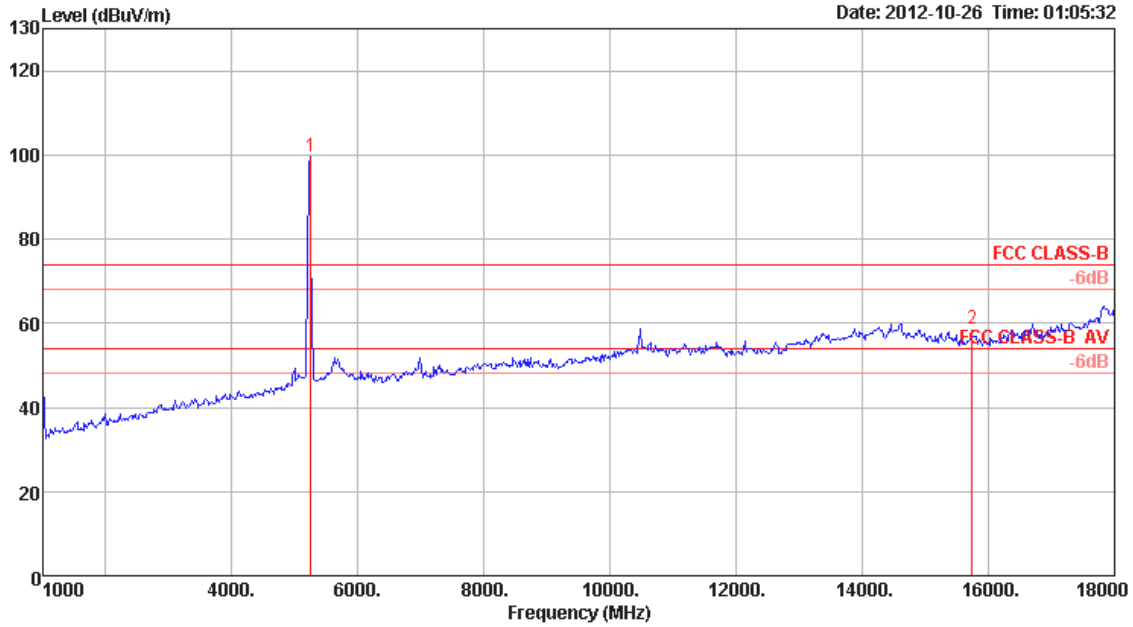


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5244.00	99.66	74.00	25.66	96.26	4.42	34.18	35.20 Peak	100	0	VERTICAL
2	15745.00	58.69	74.00	-15.31	47.96	8.48	37.80	35.55 Peak	100	154	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5240	Polarization	Horizontal

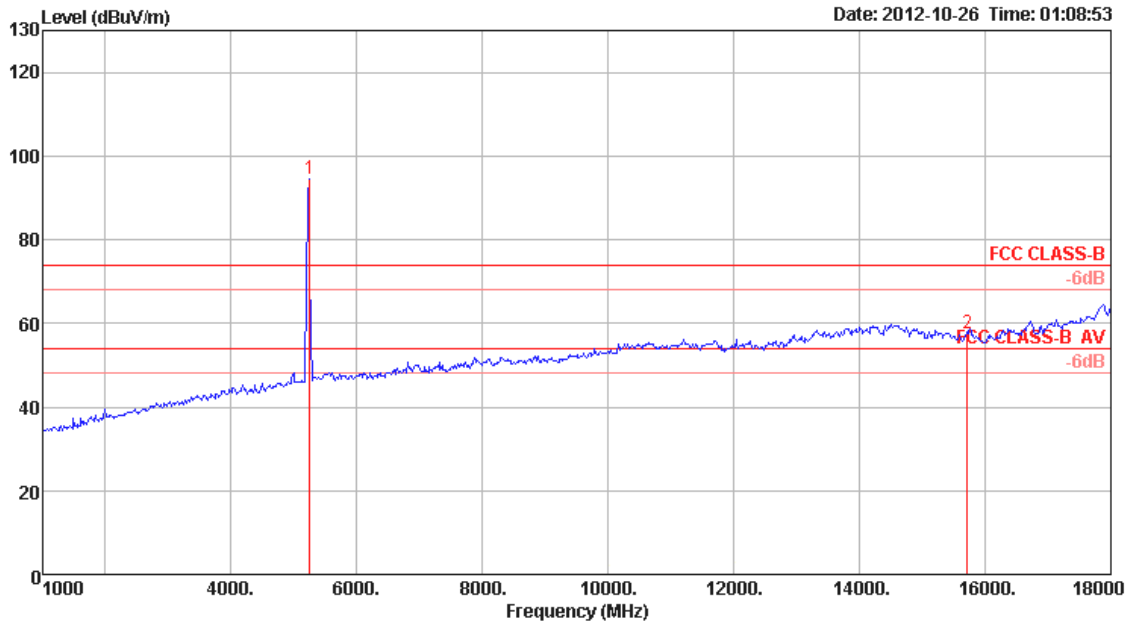


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5244.00	94.46	74.00	20.46	91.06	4.42	34.18	35.20	Peak	100	360	HORIZONTAL
2	15720.00	57.60	74.00	-16.40	46.86	8.45	37.85	35.56	Peak	100	360	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5240	Polarization	Vertical

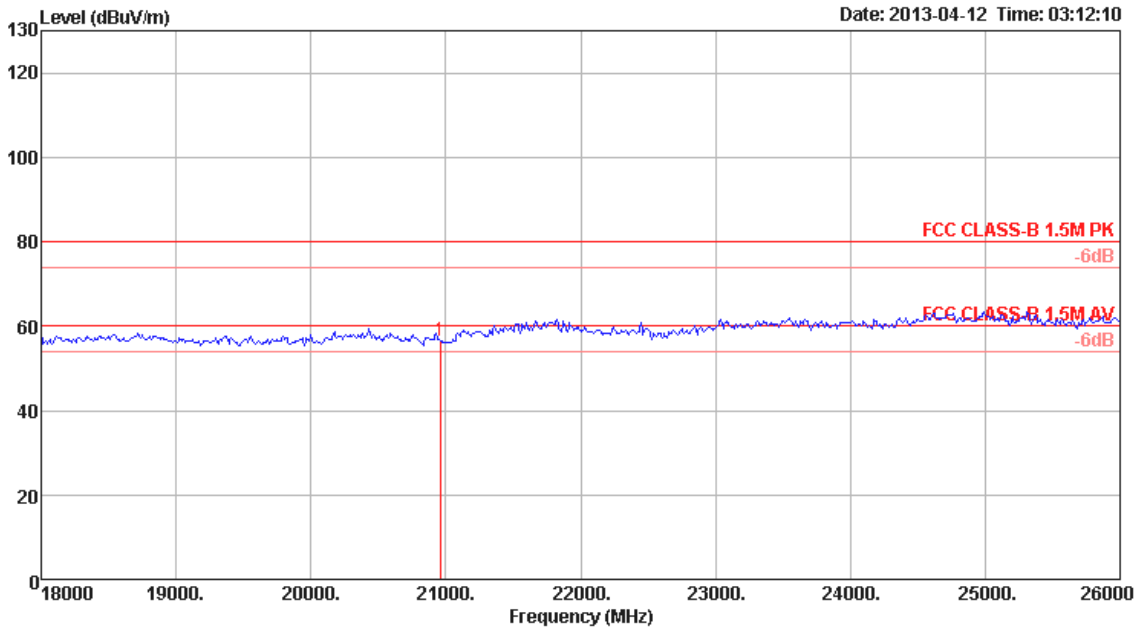


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	20960.00	56.61	80.00	-23.39	40.96	13.86	37.49	35.70	Peak	100	126	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5240	Polarization	Horizontal

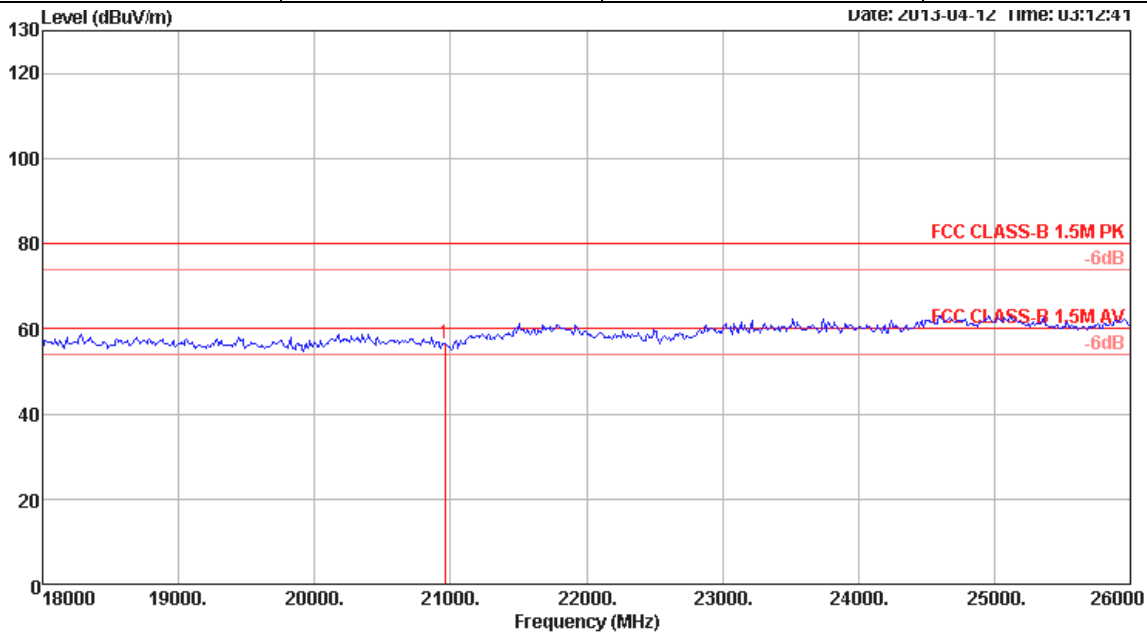


1	20960.00	56.62	80.00	-23.38	40.97	13.86	37.49	35.70	Peak	100	234	HORIZONTAL
---	----------	-------	-------	--------	-------	-------	-------	-------	------	-----	-----	------------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5240	Polarization	Vertical

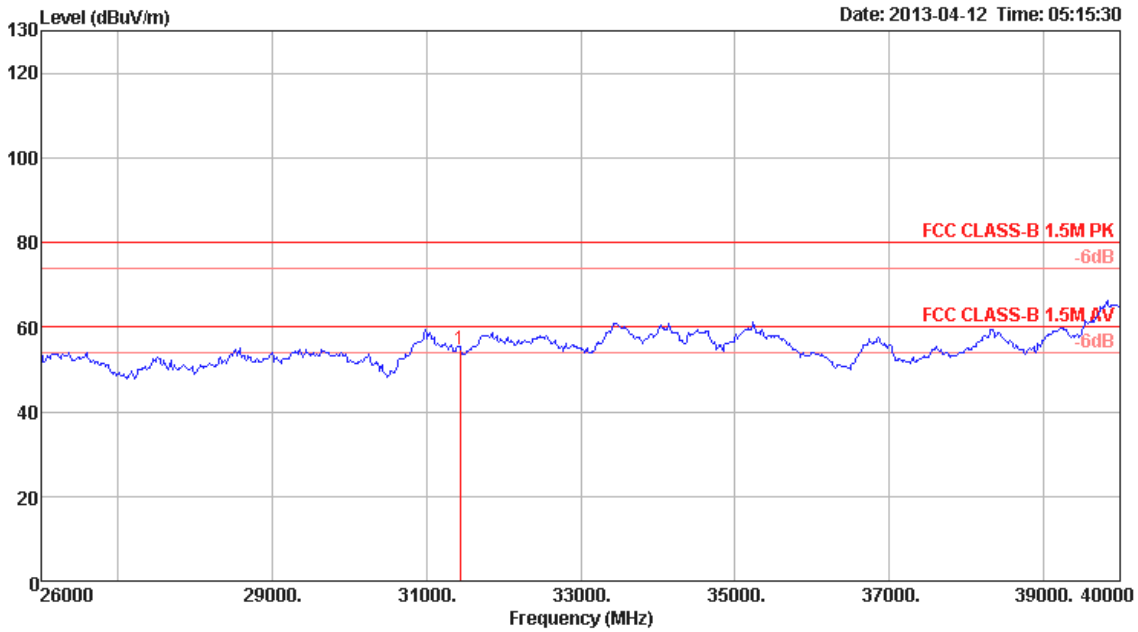


1	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31440.00	54.52	80.00	-25.48	44.05	11.68	40.01	41.22	Peak	100	164	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT-20, Beam Forming - Peak		
Test Freq. (MHZ)	5240	Polarization	Horizontal

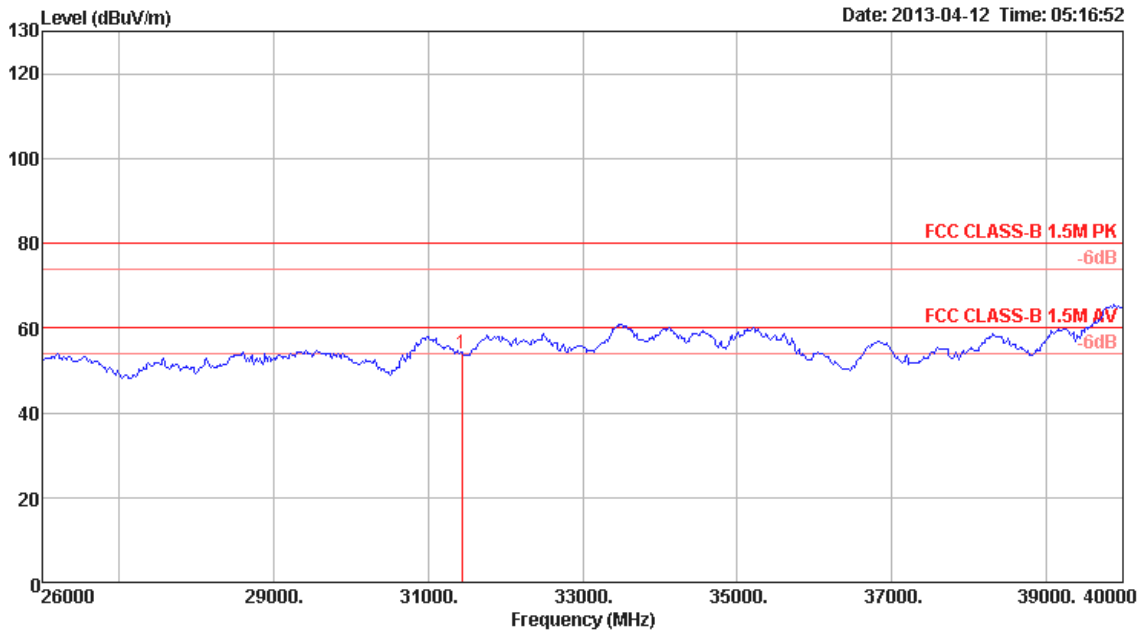

1	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31440.00	53.86	80.00	-26.14	43.39	11.68	40.01	41.22	Peak	100	38	HORIZONTAL


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5190	Polarization	Vertical

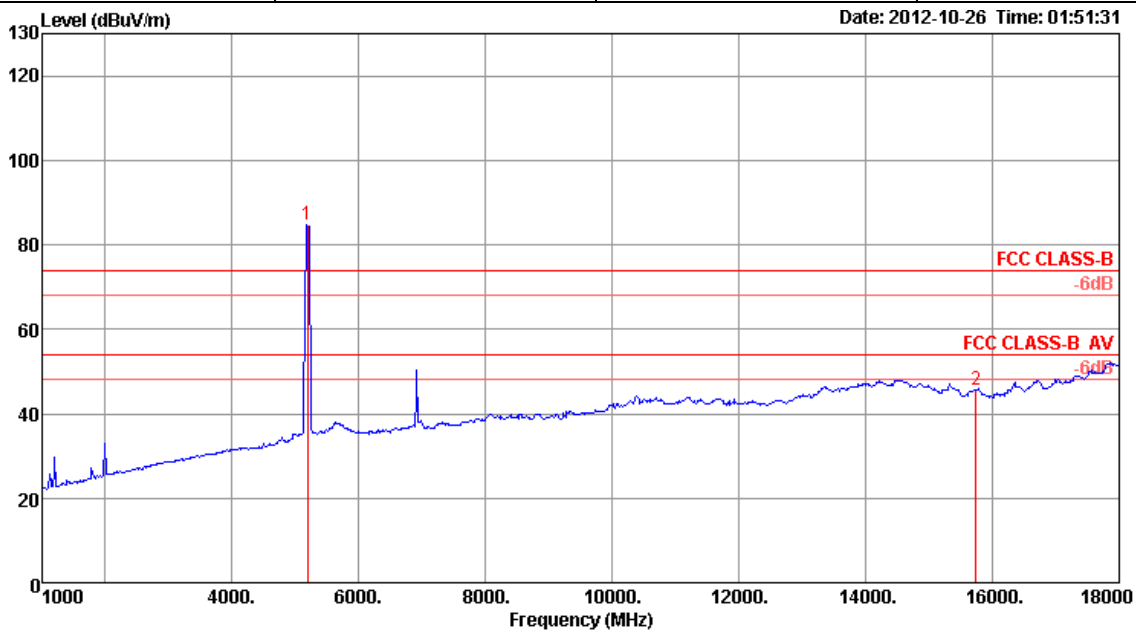


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5195.00	84.77	54.00	30.77	81.43	4.43	34.11	35.20	Average	100	0	VERTICAL
2	15742.00	45.74	54.00	-8.26	34.98	8.48	37.83	35.55	Average	100	97	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5190	Polarization	Horizontal

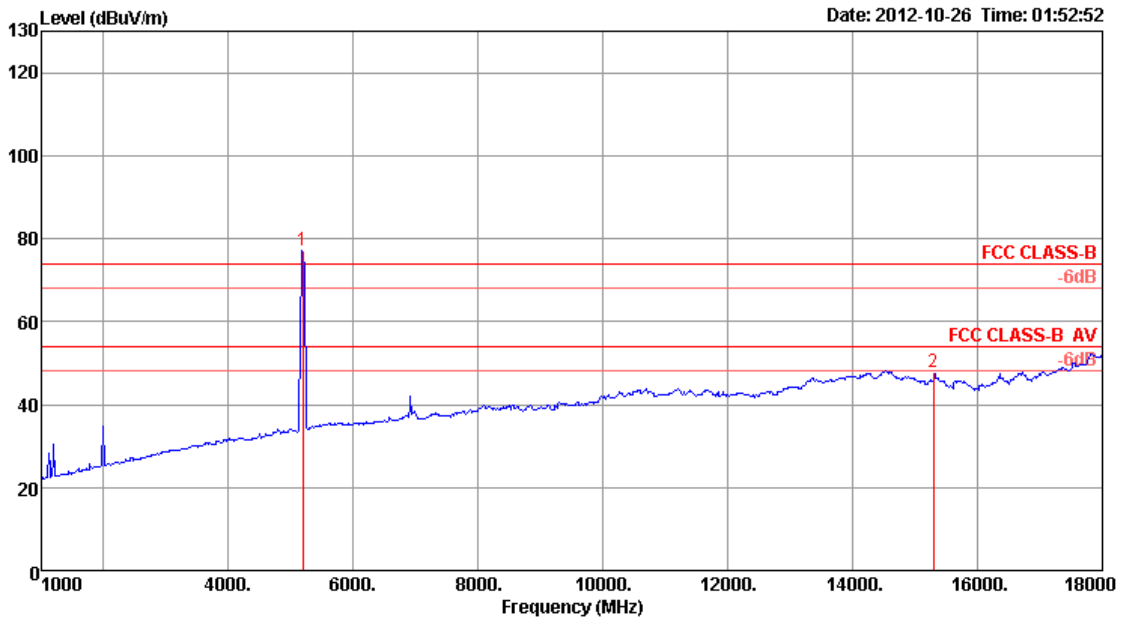


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5195.00	77.08	54.00	23.08	73.74	4.43	34.11	35.20	Average	100	0	HORIZONTAL
2	15299.00	47.64	54.00	-6.36	35.71	8.25	39.15	35.47	Average	100	358	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5190	Polarization	Vertical

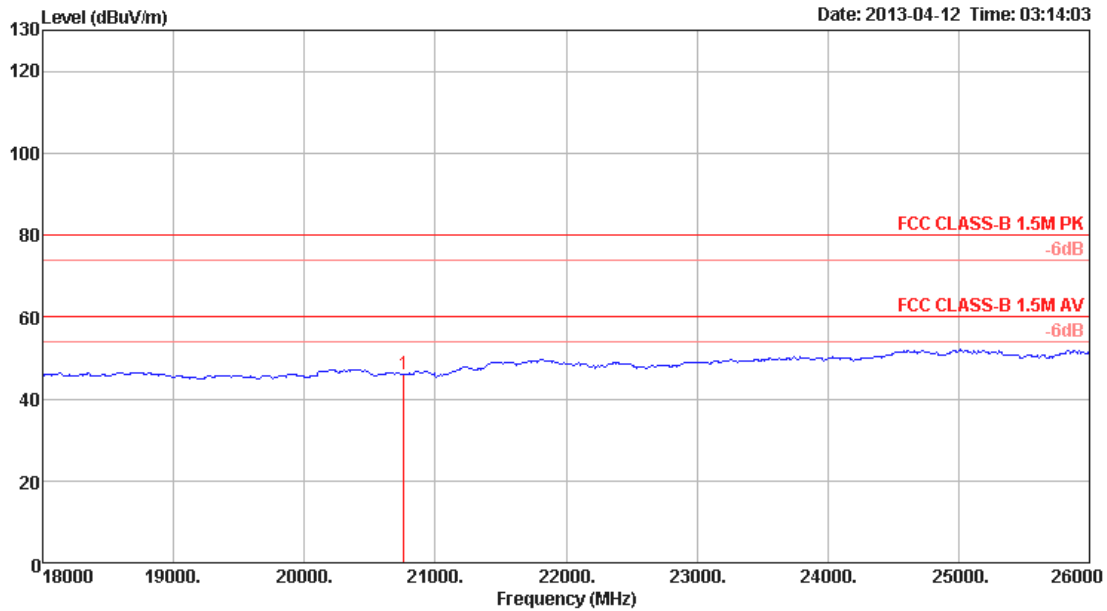


1	20760.00	46.07	60.00	-13.93	30.47	13.85	37.45	35.70	Average	100	352	VERTICAL
---	----------	-------	-------	--------	-------	-------	-------	-------	---------	-----	-----	----------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5190	Polarization	Horizontal

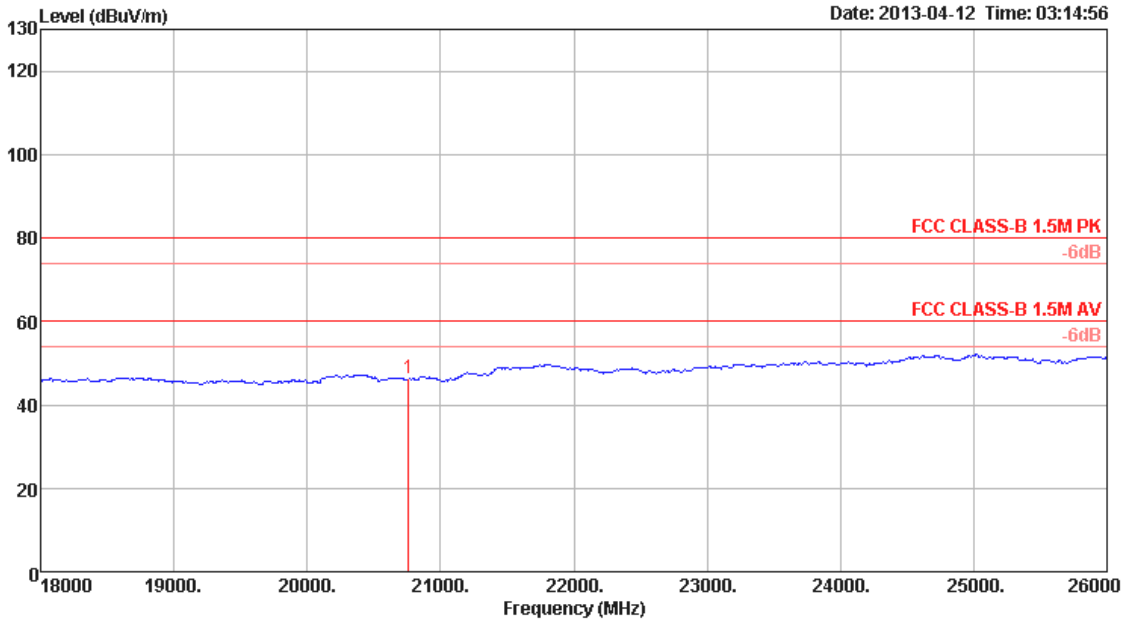


Line	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	20760.00	46.18	60.00	-13.82	30.58	13.85	37.45	35.70	Average	100	330	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5190	Polarization	Vertical

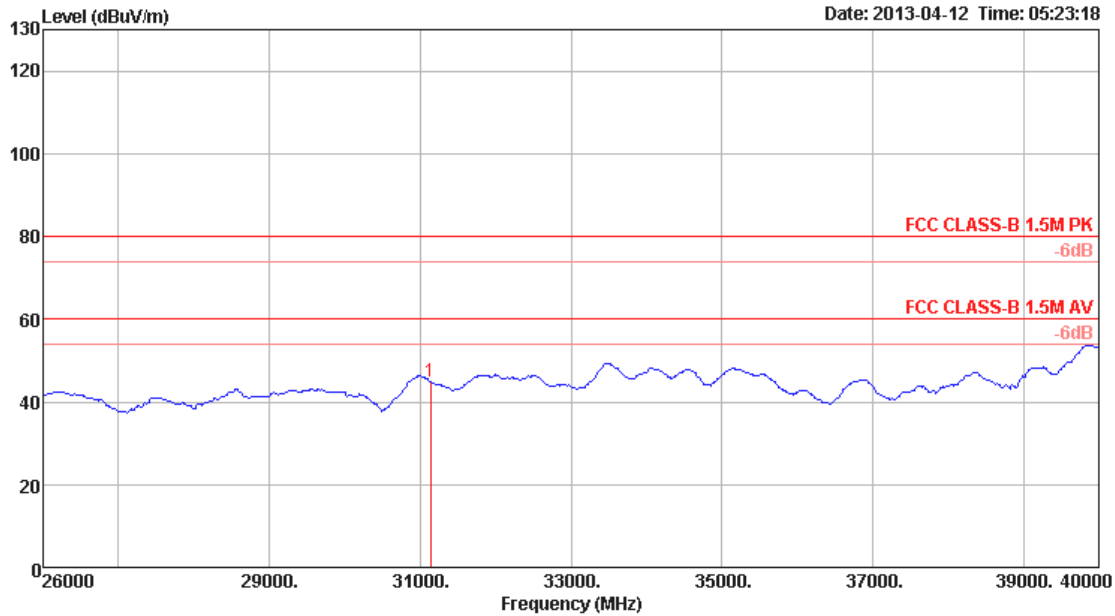


1	31140.00	44.87	60.00	-15.13	33.01	11.55	40.07	39.76	Average	100	84	VERTICAL
---	----------	-------	-------	--------	-------	-------	-------	-------	---------	-----	----	----------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5190	Polarization	Horizontal

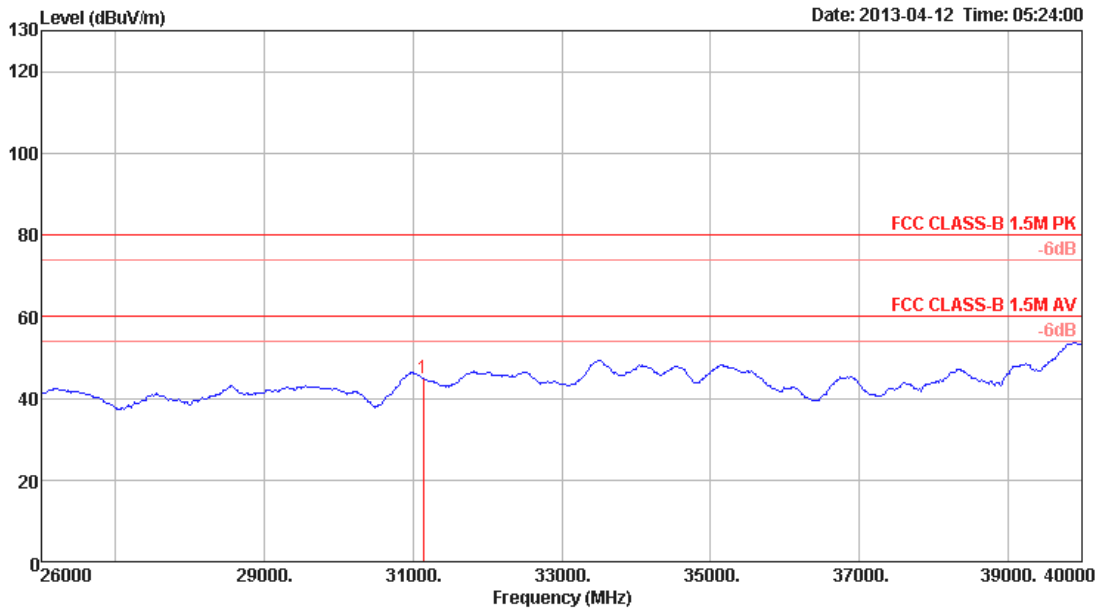


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	31140.00	44.86	60.00	-15.14	33.00	11.55	40.07	39.76	Average	100	259 HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5190	Polarization	Vertical

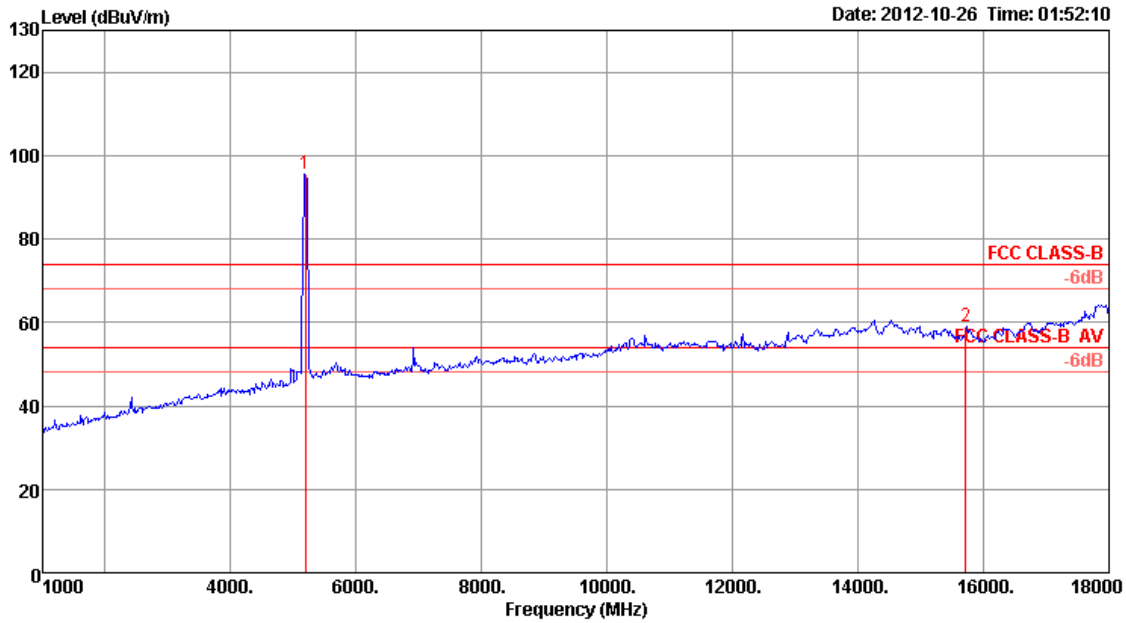


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5195.00	95.45	74.00	21.45	92.11	4.43	34.11	35.20	Peak	100	0	VERTICAL
2	15718.00	58.87	74.00	-15.13	48.13	8.45	37.85	35.56	Peak	100	97	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5190	Polarization	Horizontal

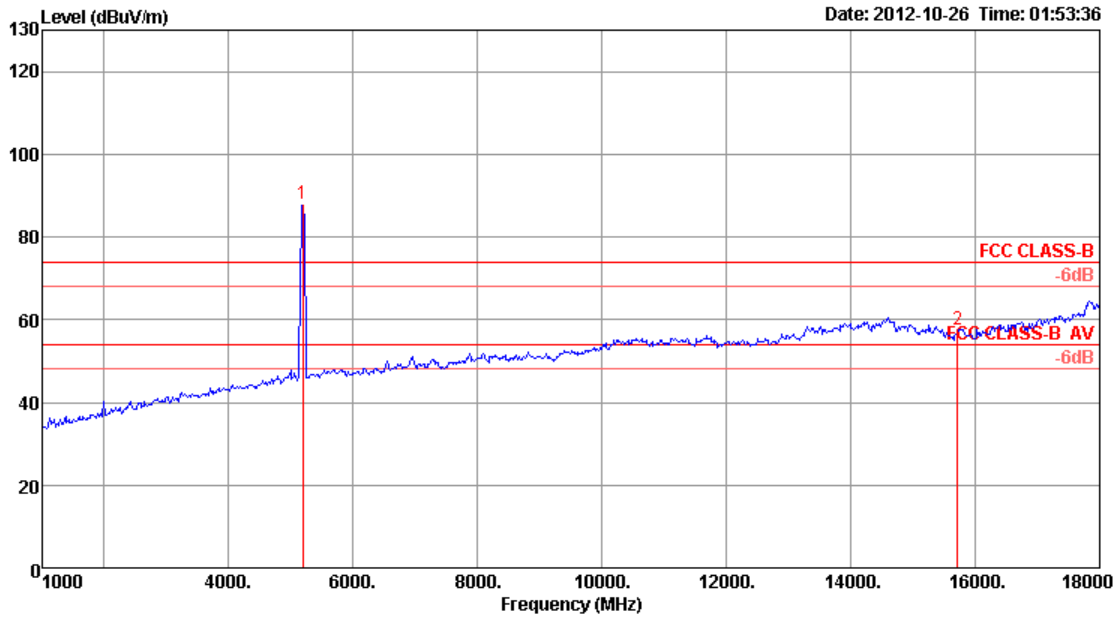

Peak	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB	dB/m	dB		cm	deg	
1	5195.00	87.84	74.00	13.84	84.50	4.43	34.11	35.20	Peak	100	0	HORIZONTAL
2	15718.00	57.70	74.00	-16.30	46.96	8.45	37.85	35.56	Peak	100	358	HORIZONTAL


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5190	Polarization	Vertical

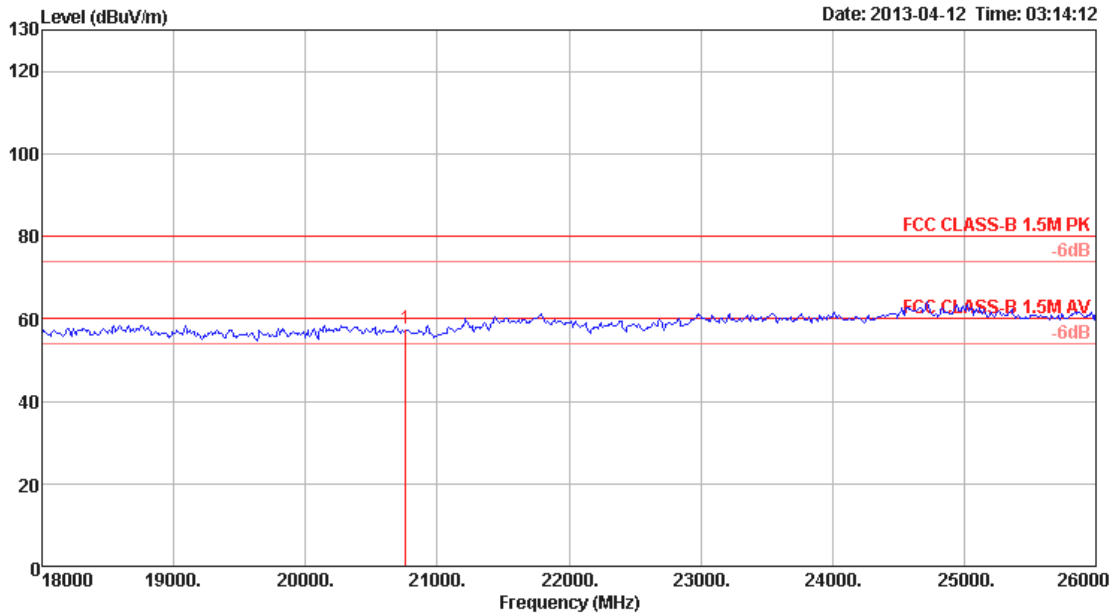


1	20760.00	57.59	80.00	-22.41	41.99	13.85	37.45	35.70	Peak	100	352	VERTICAL
---	----------	-------	-------	--------	-------	-------	-------	-------	------	-----	-----	----------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5190	Polarization	Horizontal

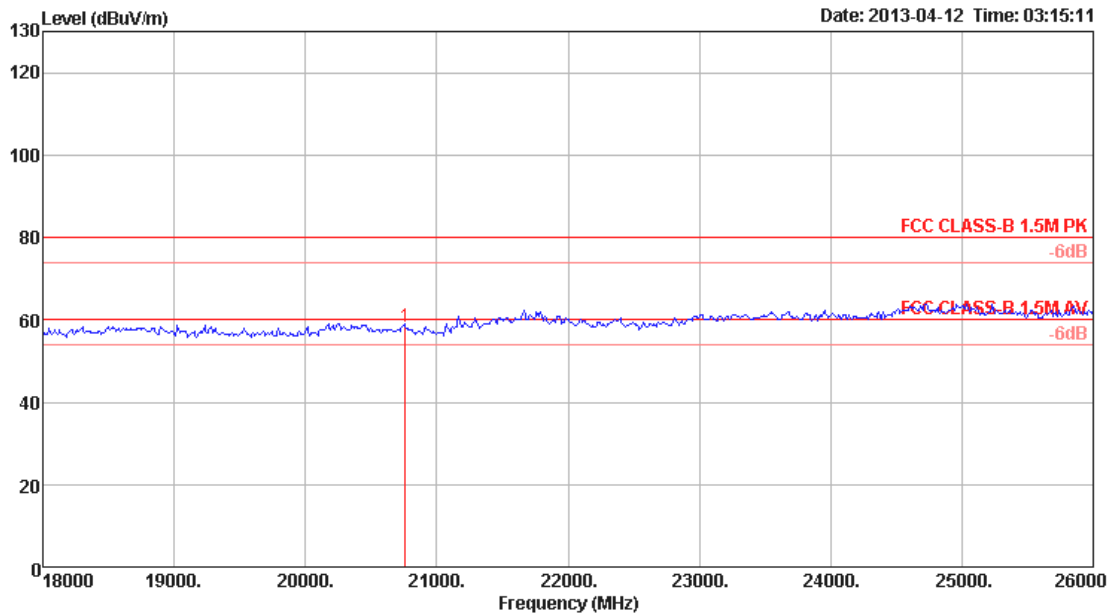


1	20760.00	58.39	80.00	-21.61	42.79	13.85	37.45	35.70	Peak	100	330	HORIZONTAL
Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase				
dB	dB	dB	dB	dB	dB	cm	deg					

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5190	Polarization	Vertical

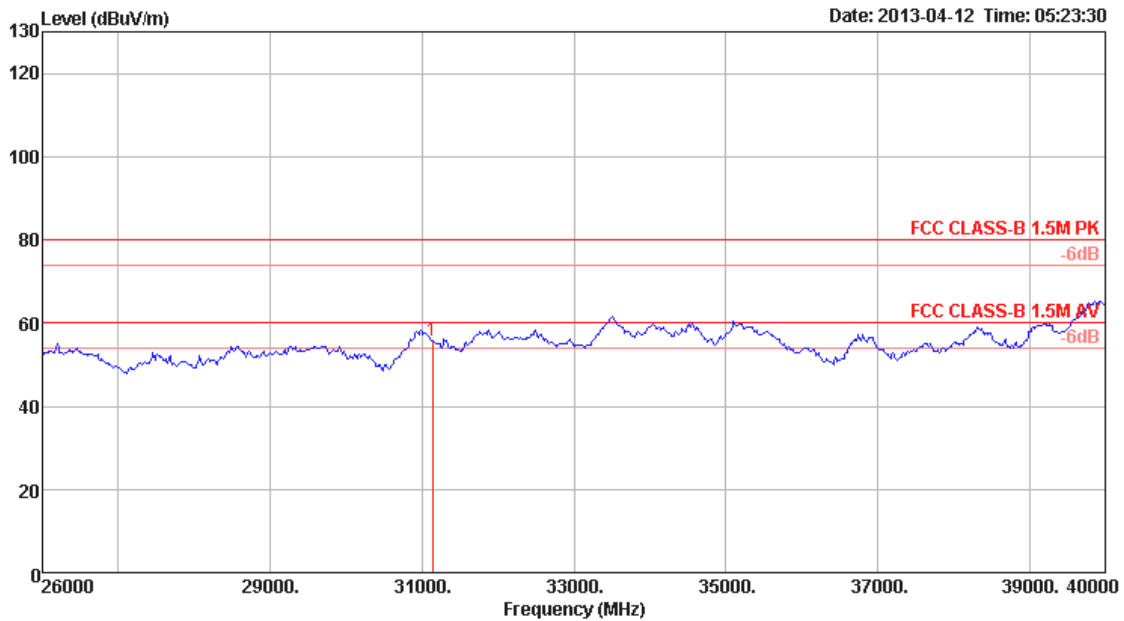


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31140.00	55.62	80.00	-24.38	43.76	11.55	40.07	39.76 Peak	100	84	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5190	Polarization	Horizontal

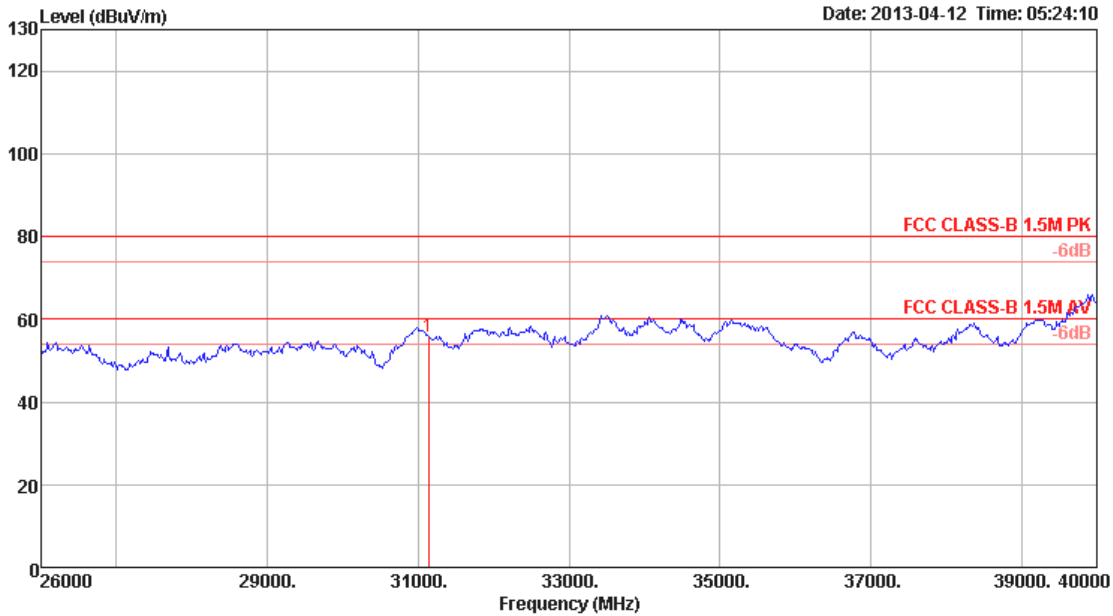


1	31140.00	55.94	80.00	-24.06	44.08	11.55	40.07	39.76	Peak	100	259	HORIZONTAL
Limit Line	Over Limit	Read Level	Cable Loss	Antenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase			
dB	dB	dB	dB	dB	dB	cm	deg					

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5230	Polarization	Vertical

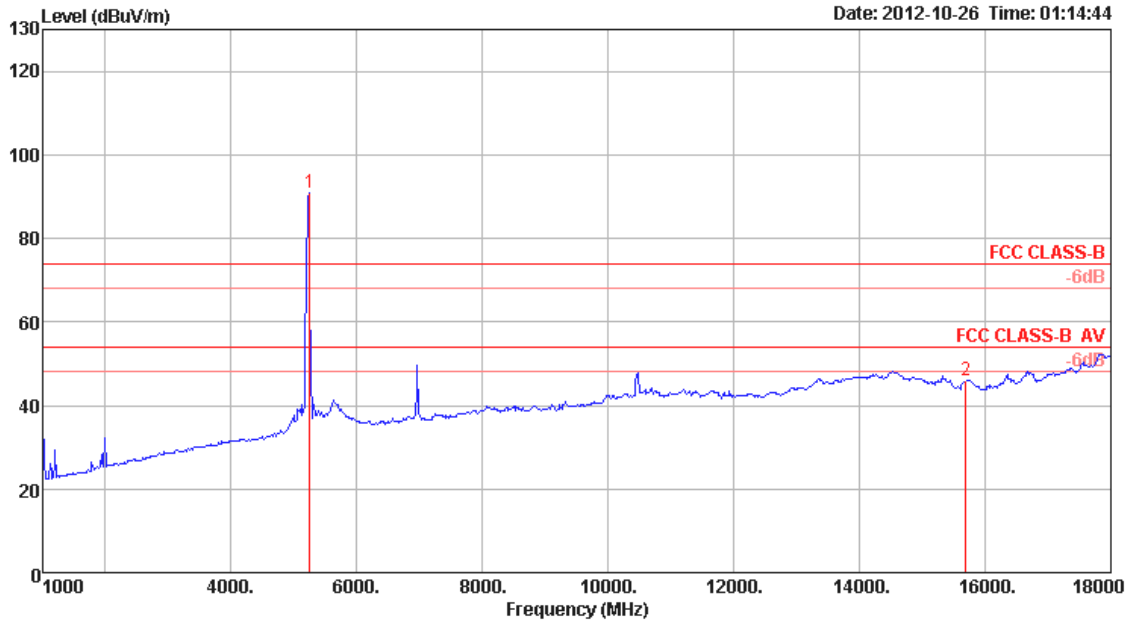


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5244.00	90.93	54.00	36.93	87.53	4.42	34.18	35.20	Average	100	0	VERTICAL
2	15690.00	46.10	54.00	-7.90	35.33	8.42	37.91	35.56	Average	100	178	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5230	Polarization	Horizontal

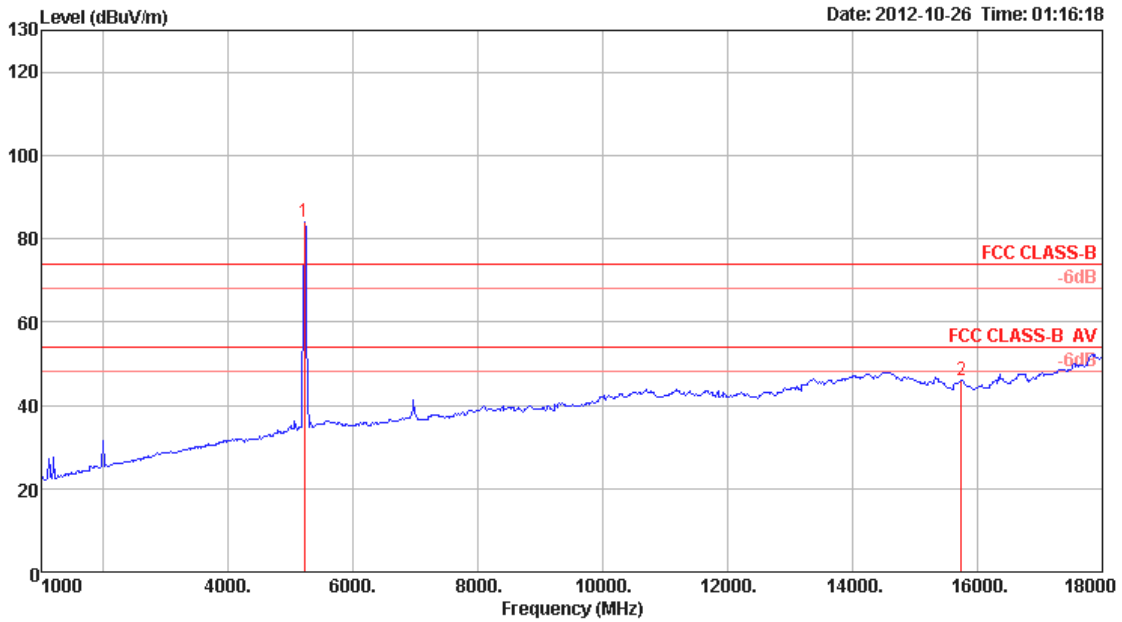


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5219.00	84.07	54.00	30.07	80.69	4.43	34.15	35.20	Average	100	0	HORIZONTAL
2	15739.00	45.97	54.00	-8.03	35.21	8.48	37.83	35.55	Average	100	298	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5230	Polarization	Vertical

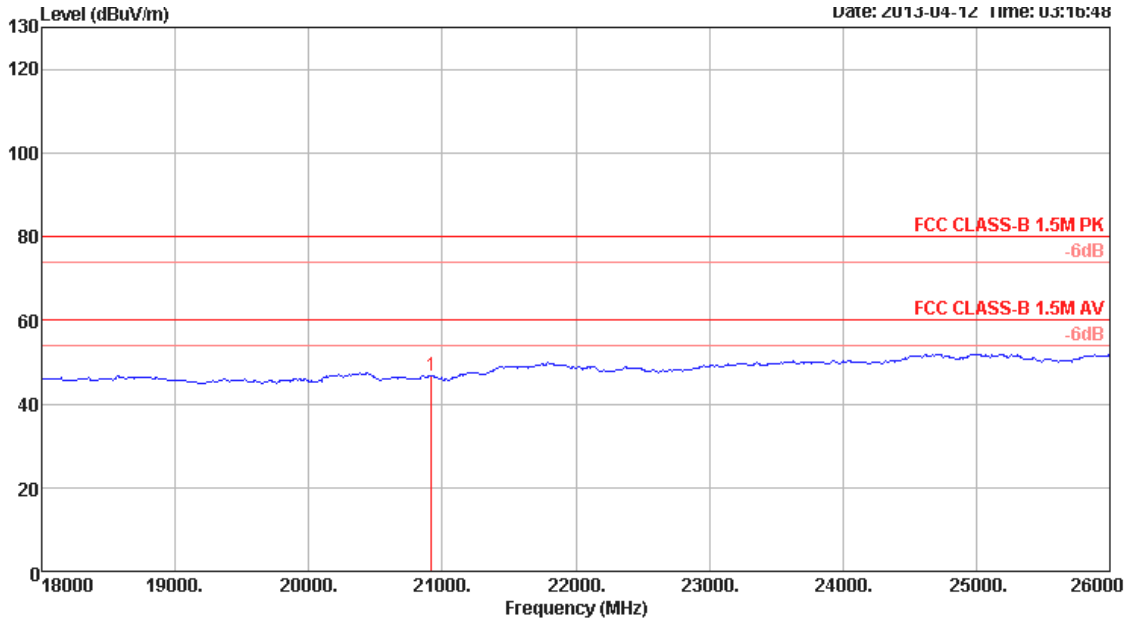


Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	20920.00	46.87	60.00	-13.13	31.22	13.86	37.49	35.70	Average	100 101 VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5230	Polarization	Horizontal

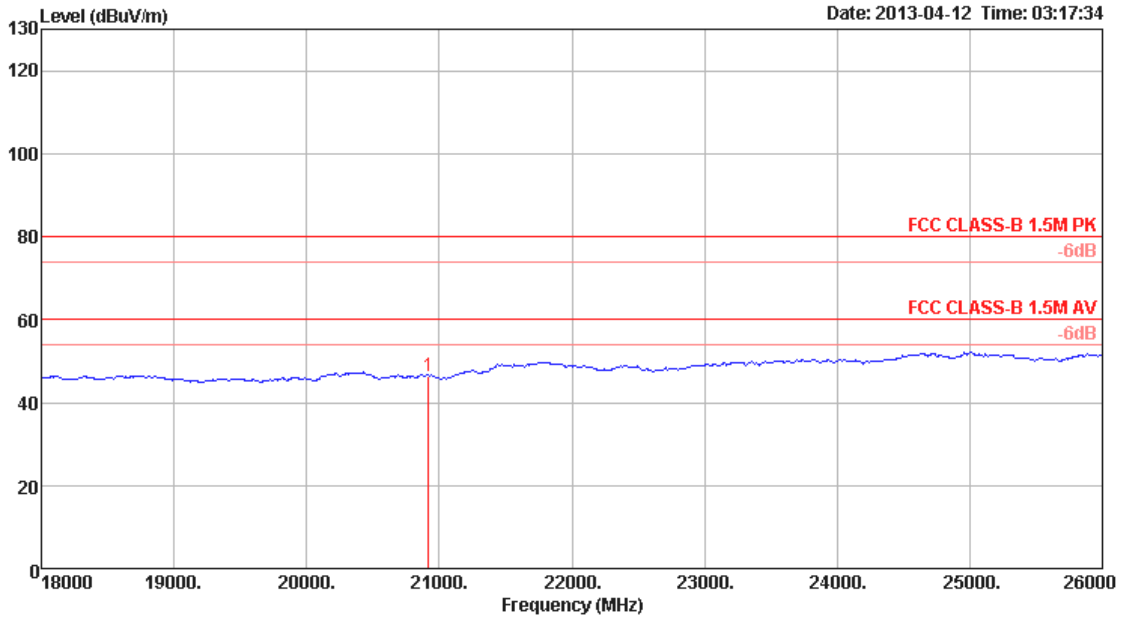

Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg		
1	20920.00	46.48	60.00	-13.52	30.83	13.86	37.49	35.70	Average	100	193	HORIZONTAL


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5230	Polarization	Vertical

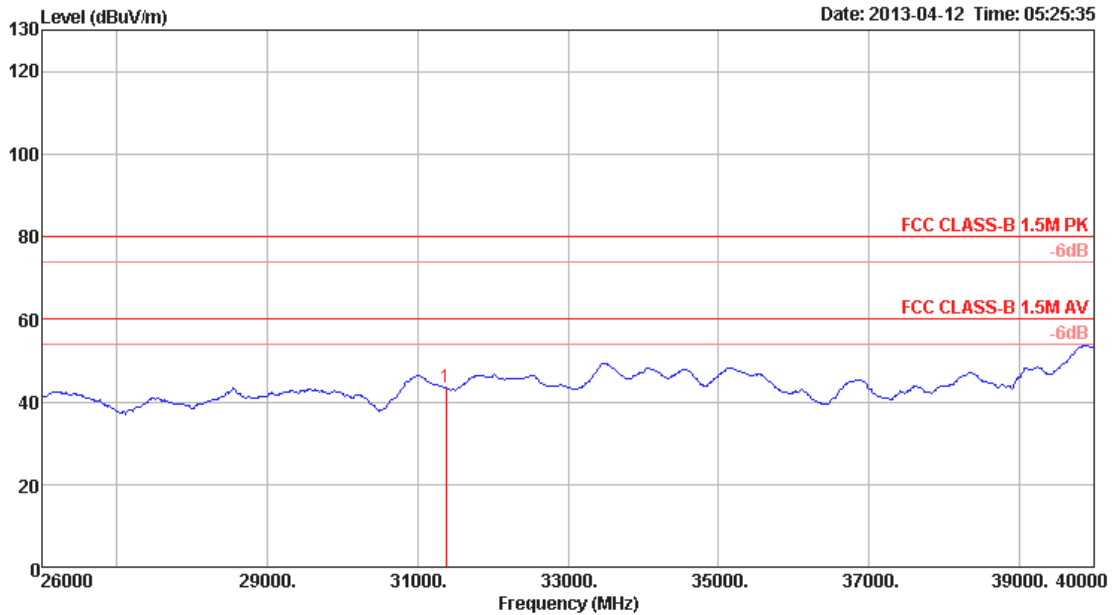


1	31380.00	43.28	60.00	-16.72	32.48	11.65	40.03	40.88	Average	100	211	VERTICAL
---	----------	-------	-------	--------	-------	-------	-------	-------	---------	-----	-----	----------

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Average		
Test Freq. (MHZ)	5230	Polarization	Horizontal

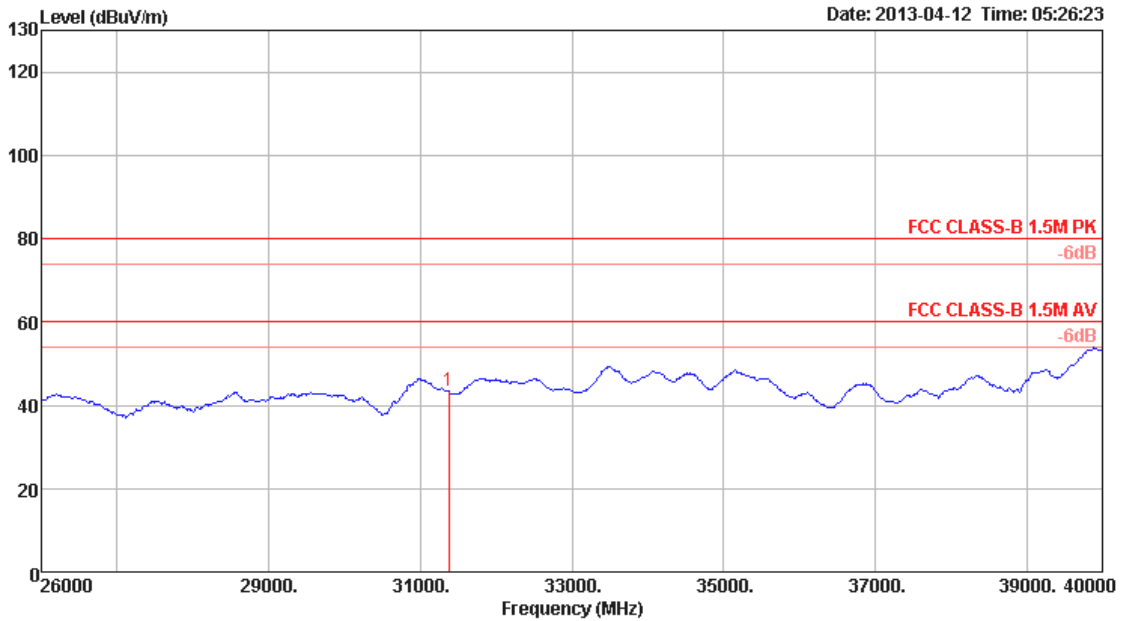


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg		
1	31380.00	43.37	60.00	-16.63	32.57	11.65	40.03	40.88	Average	100	165	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5230	Polarization	Vertical

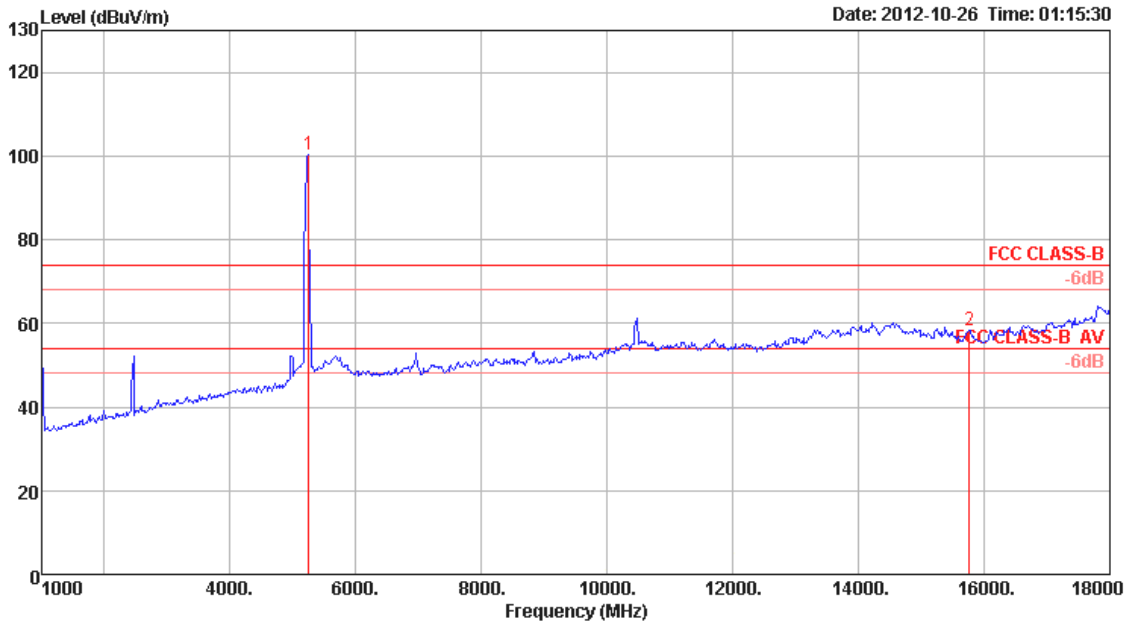


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5244.00	100.26	74.00	26.26	96.86	4.42	34.18	35.20	Peak	100	360	VERTICAL
2	15764.00	58.39	74.00	-15.61	47.66	8.50	37.77	35.54	Peak	100	178	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5230	Polarization	Horizontal

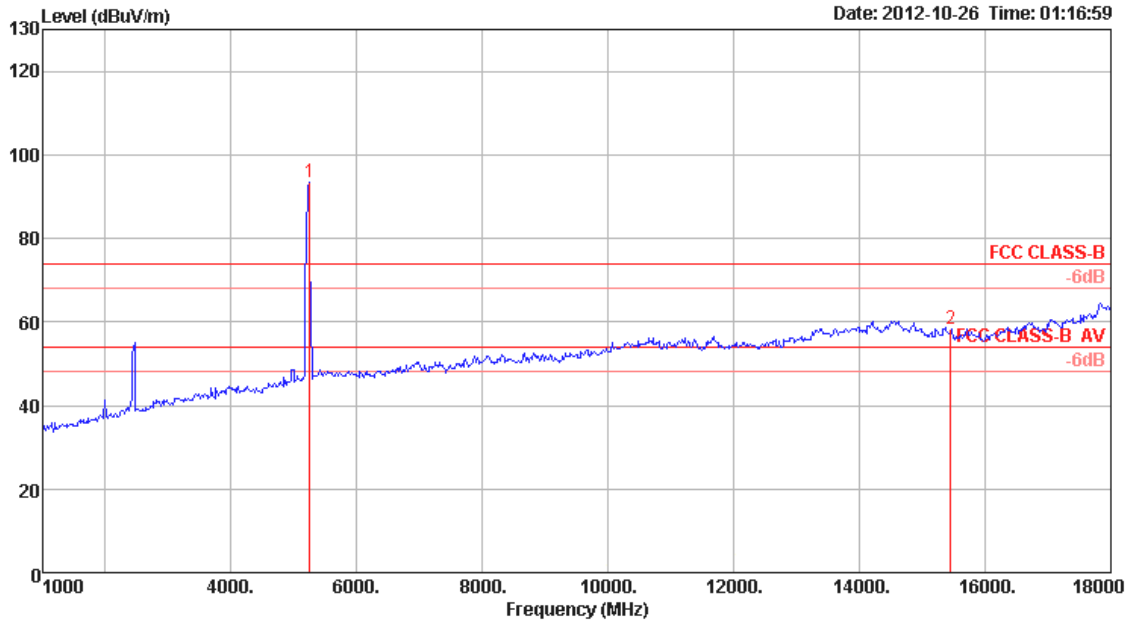


	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5244.00	93.31	74.00	19.31	89.91	4.42	34.18	35.20	Peak	100	360	HORIZONTAL
2	15444.00	58.44	74.00	-15.56	47.33	8.24	38.44	35.57	Peak	100	298	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5230	Polarization	Vertical

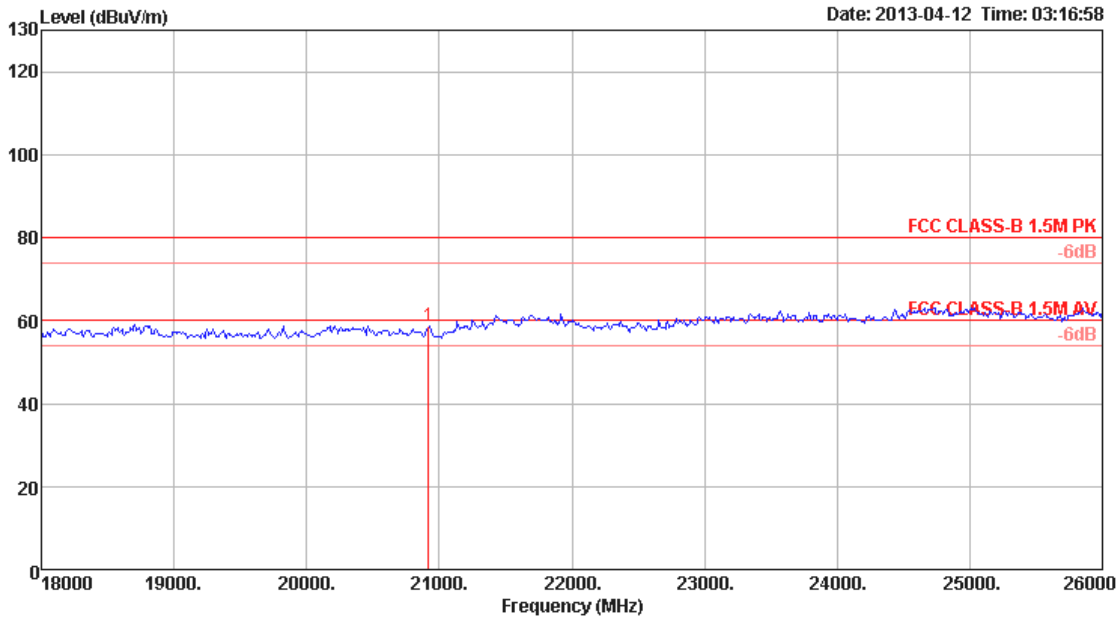


1	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	20920.00	58.52	80.00	-21.48	42.87	13.86	37.49	35.70 Peak	100	101	VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5230	Polarization	Horizontal

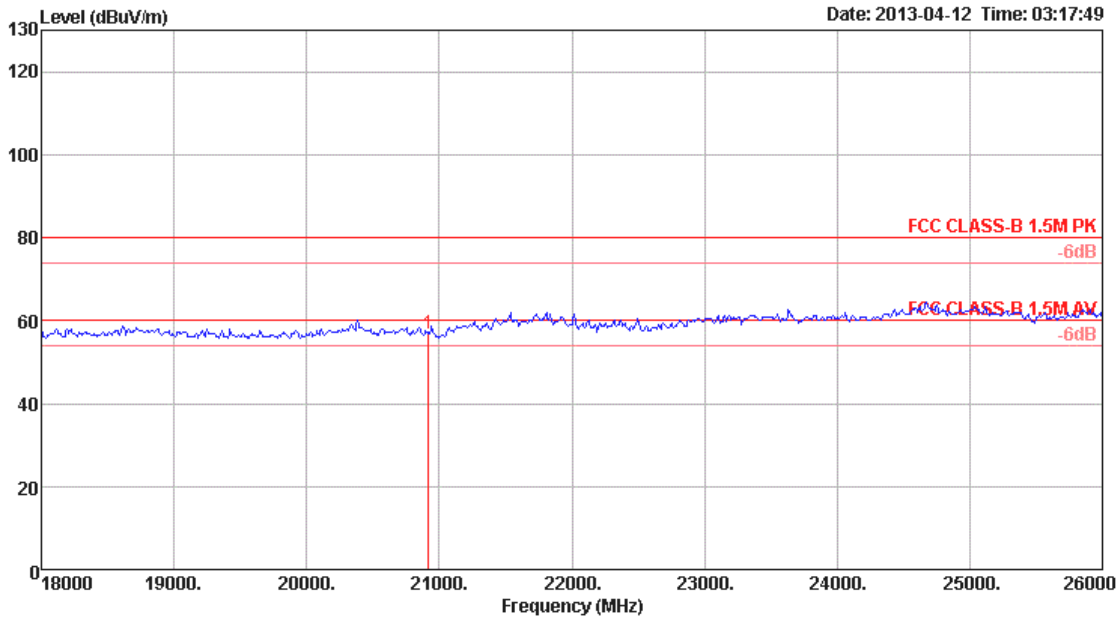


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	20920.00	56.98	80.00	-23.02	41.33	13.86	37.49	35.70	Peak	100	193	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5230	Polarization	Vertical

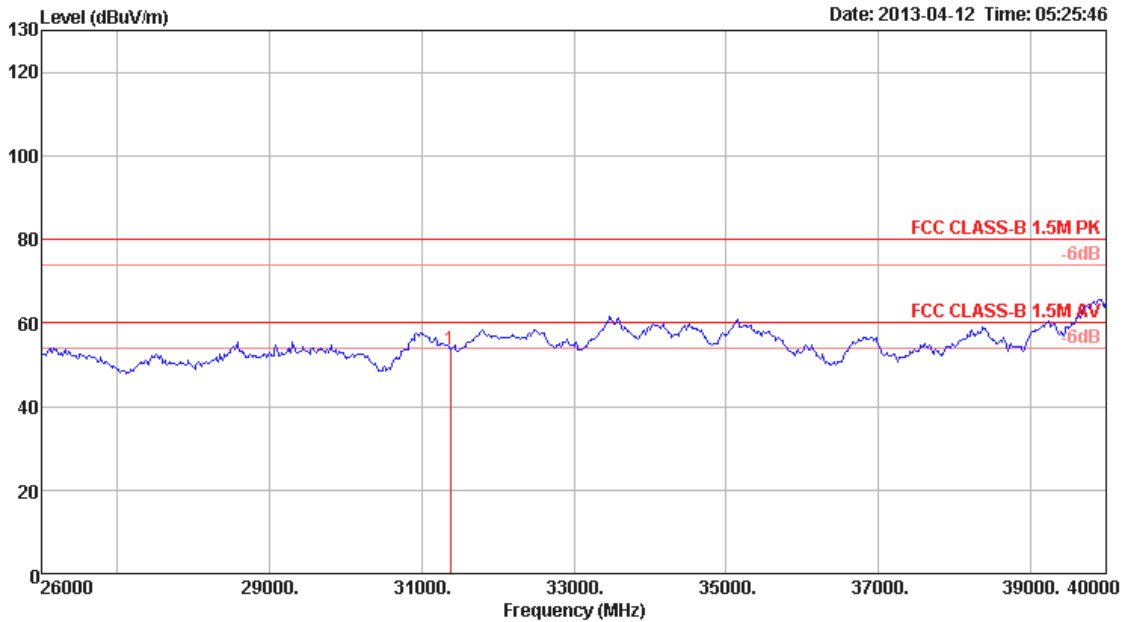


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB	dB/m	dB	cm	deg	
1	31380.00	53.67	80.00	-26.33	42.87	11.65	40.03	40.88	Peak	100	211 VERTICAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	HT40 - Peak		
Test Freq. (MHZ)	5230	Polarization	Horizontal

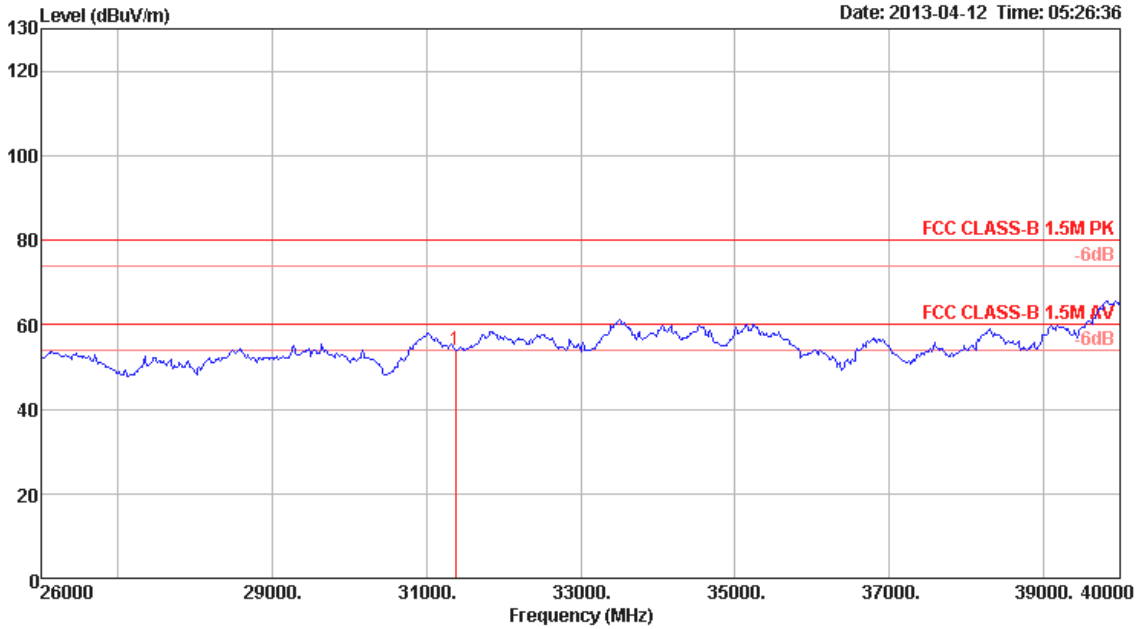

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31380.00	53.82	80.00	-26.18	43.02	11.65	40.03	40.88	Peak	100	165	HORIZONTAL

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



### 3.9 Frequency Stability

#### 3.9.1 Frequency Stability Limit

Frequency Stability Limit	
<input checked="" type="checkbox"/>	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
<input checked="" type="checkbox"/>	The transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band and $\pm 25$ ppm maximum for the 2.4 GHz band.


#### 3.9.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.9.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

#### 3.9.4 Test Setup

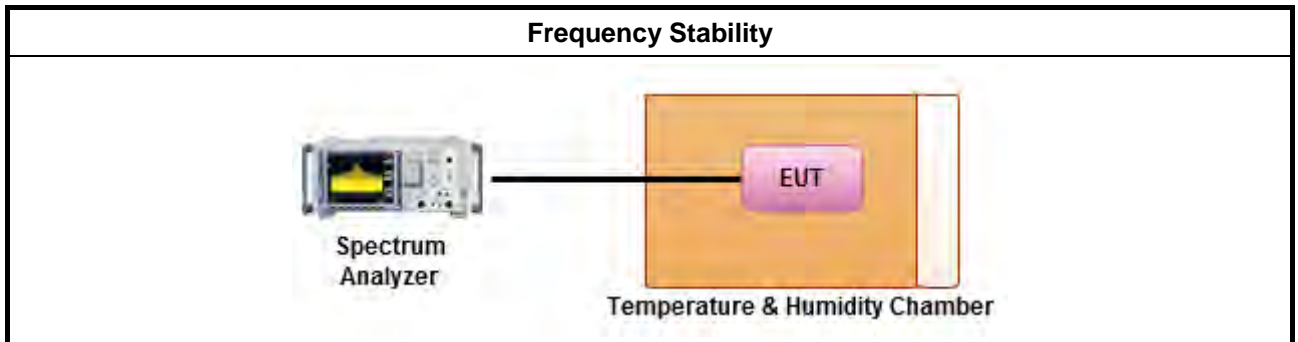



### 3.9.5 Test Result of Frequency Stability

#### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.5	5200.005000
110	5200.005600
93.5	5200.006700
Max. Deviation (MHz)	0.006700
Max. Deviation (ppm)	1.29

#### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5200.000400
-20	5200.000100
-10	5200.006700
0	5200.007000
10	5200.007000
20	5200.007000
30	5200.007500
40	5200.007500
50	5200.008500
Max. Deviation (MHz)	0.008500
Max. Deviation (ppm)	1.63



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N.C.R	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N.C.R	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N.C.R	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 10, 2013	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEA K	BBHA 9170	BBHA91702 52	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Remark
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 02, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 19, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Oct. 29, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.  
N.C.R. means Non-Calibration required.