



Test Report
AIR-CAP702y-B-K9 Series

FCC ID: LDK102085

Also covers:
AIR-SAP702y-B-K9
y= E(external) or I (internal)



5150-5250 MHz

Against the following Specifications:

CFR47 Part 15.407

Cisco Systems

170 West Tasman Drive
San Jose, CA 95134

	
Author: Jose Aguirre Tested By	Approved By: Jim Nicolson Title: Technical Leader, Engineering Revision: 2

This report replaces any previously entered test report under EDCS – **EDCS 1510692**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE	6
2.4 TESTING FACILITIES	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION.....	7
SECTION 3: RESULT SUMMARY	8
3.1 RESULTS SUMMARY TABLE	8
SECTION 4: SAMPLE DETAILS.....	10
APPENDIX A: EMISSION TEST RESULTS.....	11
CONDUCTED TEST SETUP DIAGRAM.....	11
TARGET MAXIMUM CHANNEL POWER	11
A.1 99% AND 26DB BANDWIDTH.....	12
A.2 MAXIMUM CONDUCTED OUTPUT POWER/ POWER SPECTRAL DENSITY	18
A.3 CONDUCTED SPURIOUS EMISSIONS	26
A.4 CONDUCTED BAND EDGE	34
APPENDIX B: EMISSION TEST RESULTS.....	39
RADIATED EMISSION SETUP DIAGRAM-BELOW 1G	39
RADIATED EMISSION SETUP DIAGRAM-ABOVE 1G	39
B1 RADIATED SPURIOUS EMISSIONS	40
B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ.....	51
B.3 AC CONDUCTED EMISSIONS.....	53
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST	59
APPENDIX E: ABBREVIATION KEY AND DEFINITIONS	61



Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:
110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$



Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10 ⁻⁷
temperature measurements	± 0.54 ^o
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of testing

08-Aug-15 - 01-Sep-15

2.3 Report Issue Date

01-September-2015

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
125 West Tasman Drive
San Jose, CA 95134, USA

Test Engineers

Jose Aguirre

2.5 Equipment Assessed (EUT)

AIR-CAP702E-B-K9



2.6 EUT Description

The AIR-CAP702E-B-K9 Cisco Aironet 802.11N Radio support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

- 802.11n - Non HT-20, One Antenna, 6 to 54 Mbps
- 802.11n - Non HT-20, Two Antennas, 6 to 54 Mbps

- 802.11n - HT-20, One Antenna, M0 to M7
- 802.11n - HT-20, Two Antennas, M0 to M7
- 802.11n - HT-20, Two Antennas, M8 to M15

- 802.11n - HT-20 Beam Forming, Two Antennas, M0 to M7
- 802.11n - HT-20 Beam Forming, Two Antennas, M8 to M15

- 802.11n - HT-20 STBC, Two Antennas, M0 to M7

- 802.11n - Non HT-40 Duplicate, One Antenna, 6 to 54 Mbps
- 802.11n - Non HT-40 Duplicate, Two Antennas, 6 to 54 Mbps

- 802.11n - HT-40, One Antenna, M0 to M7
- 802.11n - HT-40, Two Antennas, M0 to M7
- 802.11n - HT-40, Two Antennas, M8 to M15

- 802.11n - HT-40 Beam Forming, Two Antennas, M0 to M7
- 802.11n - HT-40 Beam Forming, Two Antennas, M8 to M15

- 802.11n - HT-40 STBC, Two Antennas, M0 to M7

The following antennas are supported by this product series.
The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4/5 GHz	Internal	Omni-Directional	3 / 5

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	<p>99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.</p> <p>The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.</p>	Pass
FCC 15.407	<p>Output Power: 15.407: (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	Pass
FCC 15.407	<p>Power Spectral Density: 15.407 The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	Pass
FCC 15.407	<p>Conducted Spurious Emissions / Band-Edge: For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27dBm/MHz.</p>	Pass
FCC 15.407 FCC 15.209 FCC 152.05	<p>Restricted band: Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).</p>	Pass

**Radiated Emissions (General requirements)**

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 FCC 15.205	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass
FCC 15.207	AC conducted Emissions: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

* MPE calculation is recorded in a separate report



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP702E-B-K9	Cisco Systems	A0	AP1G1-k9w 7-mx.153	Cisco IOS 15.3	KWC1630002X
S02*	AIR-PWR-C	Meanwell	A0	NA	NA	EB46E93226

(*) S02 is support equipment Power supply for EUT S01

4.2 System Details

System #	Description	Samples
1	AIR-CAP702E-B-K9	S01
2	AIR-PWR-C	S02

4.3 Mode of Operation Details


Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting, >98% Duty Cycle

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output

Appendix A: Emission Test Results

Conducted Test Setup Diagram

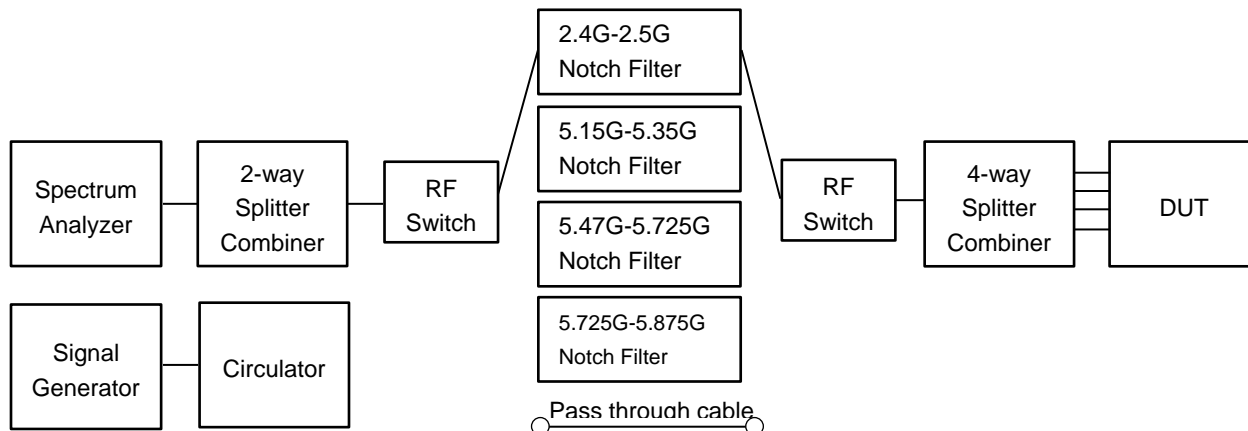

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5180	5240
Non HT-20, 6 to 54 Mbps	17	19
Non HT-20 Beam Forming, 6 to 54 Mbps	9	19
HT-20, M0 to M15, M0 to M9 1-0ss	16	19
HT-20 Beam Forming, M0 to M15	12	19
HT-20 STBC, M0 to M7	12	19
	5190	5230
Non HT-40, M0 to M15, M0 to M9 1-0ss	17	20
HT-40, M0 to M15, M0 to M9 1-0ss	15	19
HT-40 Beam Forming, M8 to M15	15	19
HT-40 STBC, M0 to M7	15	19



A.1 99% and 26dB Bandwidth

FCC 15.407 The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB)

Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB)

Test parameters

Span = 1.5 x to 5.0 times OBW

RBW = approx. 1% to 5% of the OBW

VBW \geq 3 x RBW

Detector = Peak or where practical sample shall be used

Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :

Jose Aguirre

Date of testing:

08-Aug-15 - 01-Sep-15

Test Result : PASS


See Appendix C for list of test equipment




Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5180	Non HT-20, M0 to M23, M0 to M9 1-0ss	6	21.5	16.6
	HT-20 STBC, M0 to M23	m0	22.2	17.7
5190	Non HT-40, M0 to M23, M0 to M9 1-0ss	m0	45.9	36.5
	HT-40 STBC, M0 to M23	m0	45.9	36.5
5230	Non HT-40, M0 to M23, M0 to M9 1-0ss	6	43.6	36.5
	HT-40 STBC, M0 to M23	m0	45.3	36.5
5240	Non HT-20, M0 to M23, M0 to M9 1-0ss	6	21.6	16.6
	HT-20 STBC, M0 to M23	m0	22.8	17.7



26dB / 99% Bandwidth, 5180 MHz, Non HT-20, M0 to M23, M0 to M9 1-0ss

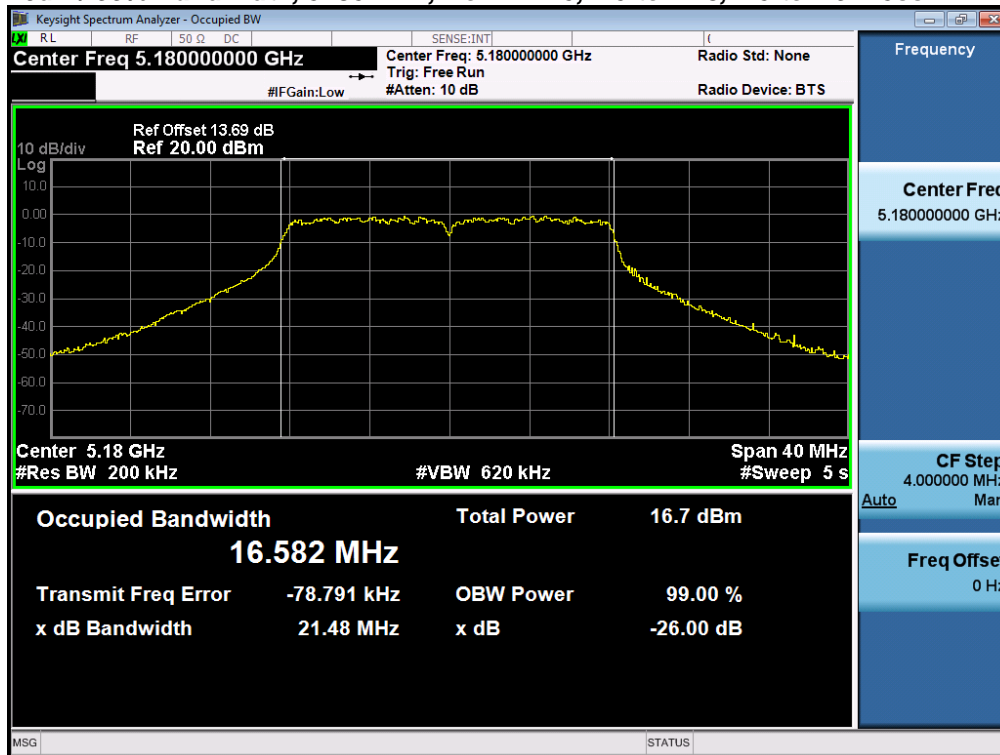


26dB / 99% Bandwidth, 5180 MHz, HT-20 STBC, M0 to M23

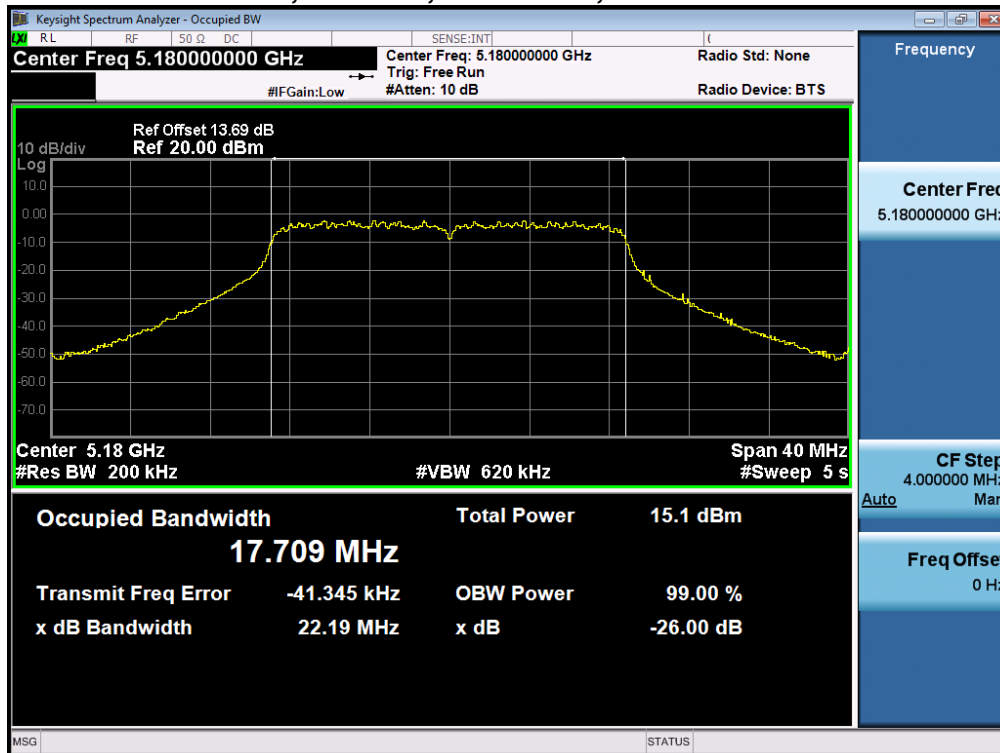




26dB / 99% Bandwidth, 5190 MHz, Non HT-40, M0 to M23, M0 to M9 1-0ss

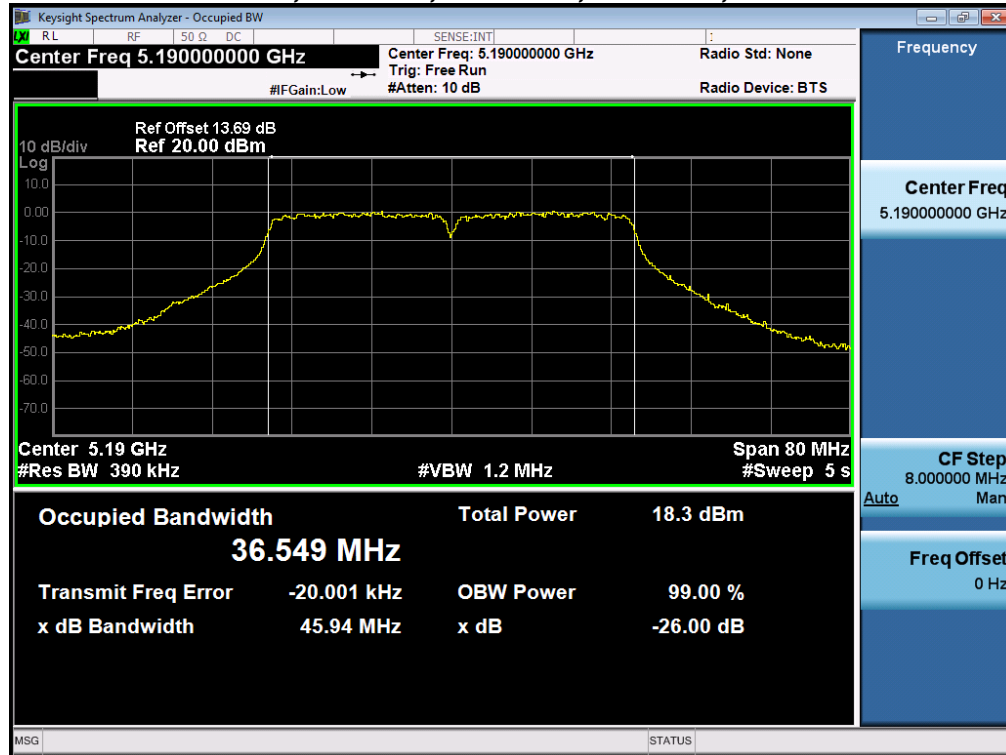


26dB / 99% Bandwidth, 5190 MHz, HT-40 STBC, M0 to M23

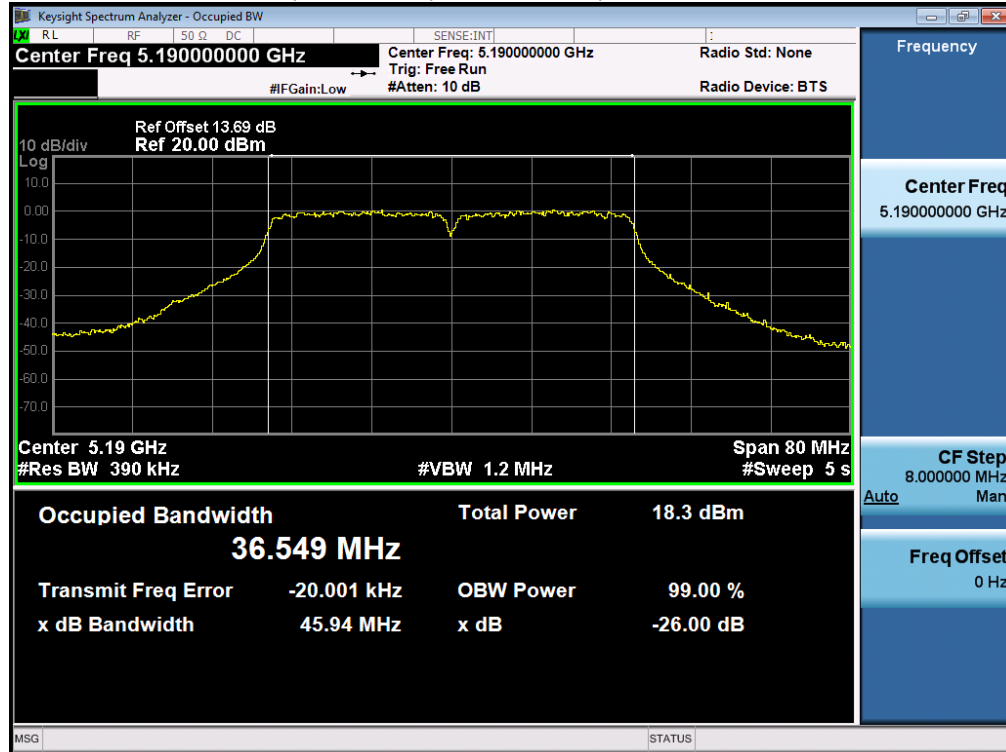




26dB / 99% Bandwidth, 5230 MHz, Non HT-40, M0 to M23, M0 to M9 1-0ss

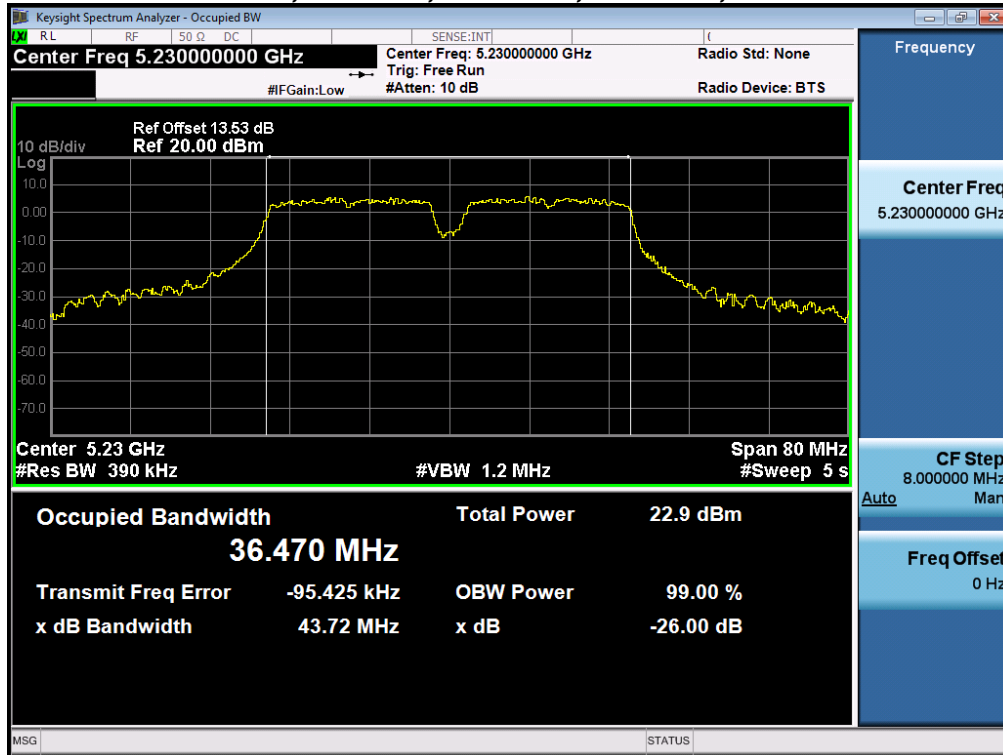


26dB / 99% Bandwidth, 5230 MHz, HT-40 STBC, M0 to M23

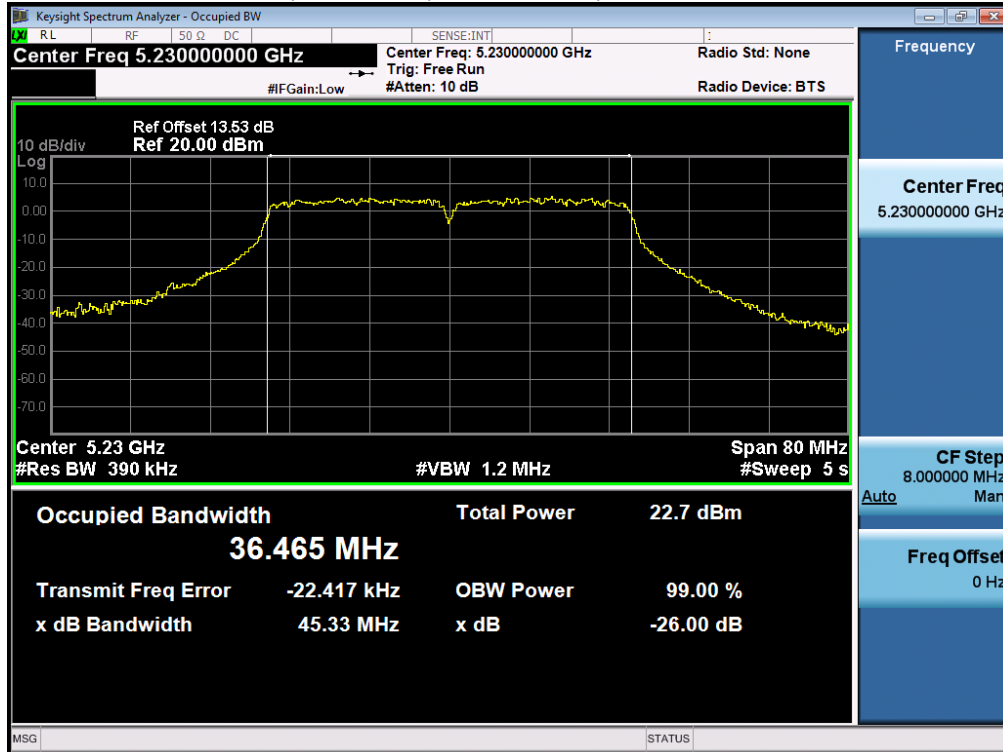




26dB / 99% Bandwidth, 5240 MHz, Non HT-20, M0 to M23, M0 to M9 1-0ss

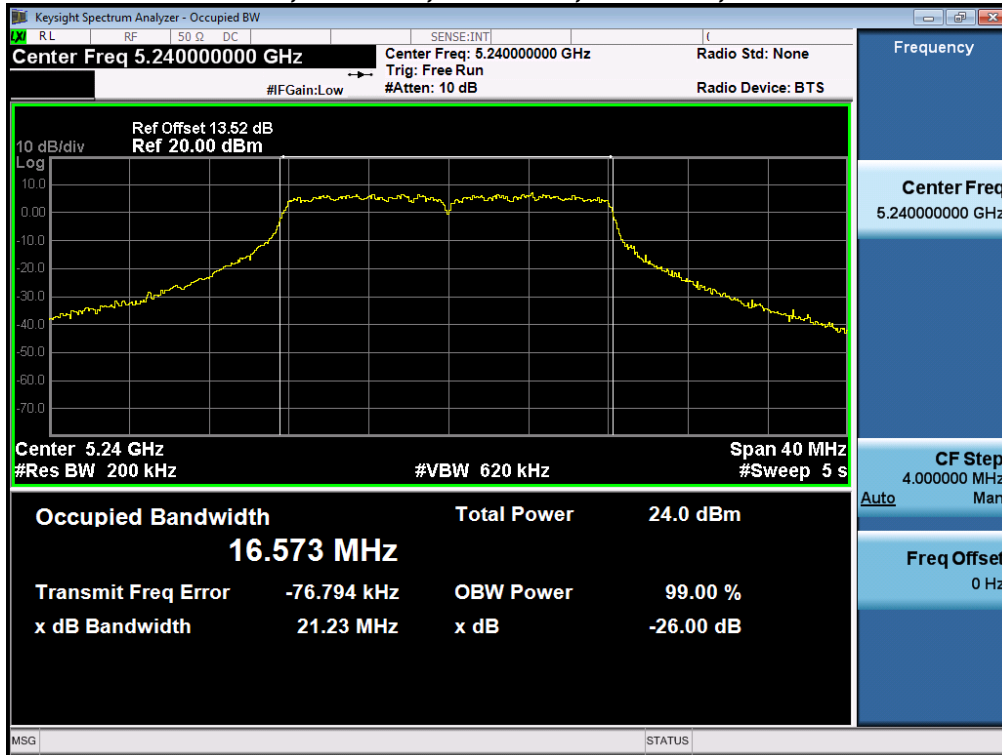

26dB / 99% Bandwidth, 5240 MHz, HT-20 STBC, M0 to M23

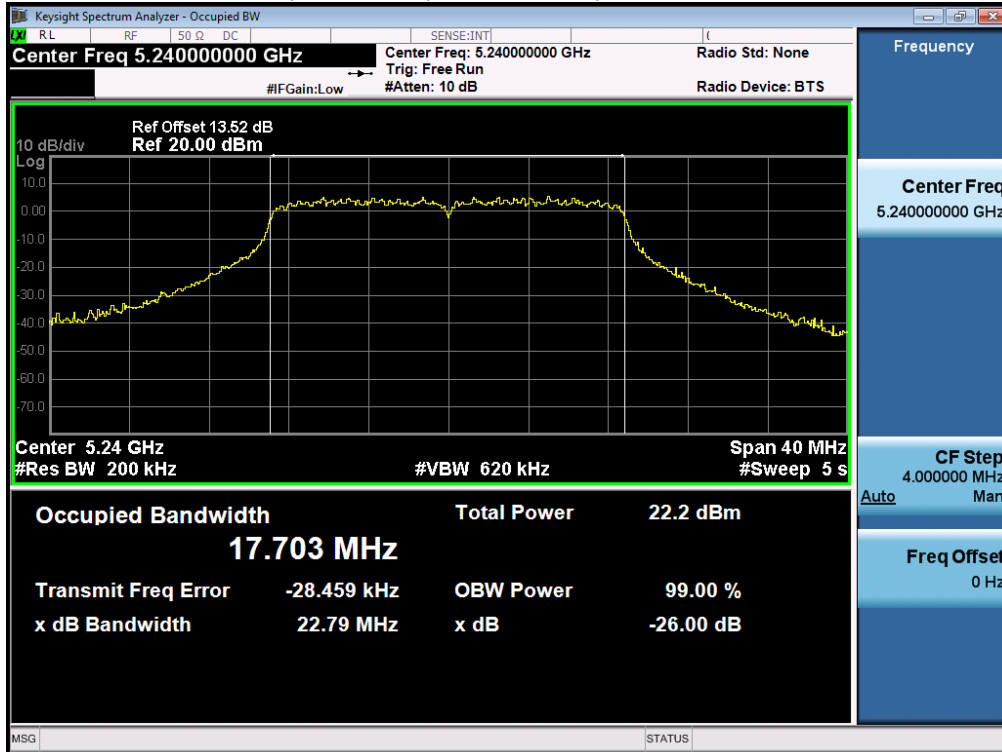



A.2 Maximum Conducted Output Power/ Power Spectral Density

15.407 (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

Output Power
Test Procedure
<ol style="list-style-type: none"> 1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013 section 12.3.2.2 Method SA-1

Output Power
Test parameters
Span = >1.5 times the OBW RBW = 1MHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = sample Trace = Trace Average 100

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>



Tested By : Jose Aguirre	Date of testing: 08-Aug-15 - 01-Sep-15
Test Result : PASS	

See Appendix C for list of test equipment



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54 Mbps	1	5	16.6		16.6	30.0	13.4
	Non HT-20, 6 to 54 Mbps	2	5	9.8	8.3	12.1	30.0	17.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	6.5	5.4	9.0	28.0	19.0
	HT-20, M0 to M7	1	5	16.5		16.5	30.0	13.5
	HT-20, M0 to M7	2	5	9.7	8.2	12.0	30.0	18.0
	HT-20, M8 to M15	2	5	9.7	8.2	12.0	30.0	18.0
	HT-20 Beam Forming, M0 to M7	2	8	6.7	5.5	9.2	28.0	18.8
	HT-20 Beam Forming, M8 to M15	2	5	9.7	8.2	12.0	30.0	18.0
	HT-20 STBC, M0 to M7	2	5	9.7	8.2	12.0	30.0	18.0
5190	Non HT-40, 6 to 54 Mbps	1	5	16.2		16.2	30.0	13.8
	Non HT-40, 6 to 54 Mbps	2	5	15.0	13.5	17.3	30.0	12.7
	HT-40, M0 to M7	1	5	14.6		14.6	30.0	15.4
	HT-40, M0 to M7	2	5	12.6	11.1	14.9	30.0	15.1
	HT-40, M8 to M15	2	5	12.6	11.1	14.9	30.0	15.1
	HT-40 Beam Forming, M0 to M7	2	8	7.1	5.5	9.4	28.0	18.6
	HT-40 Beam Forming, M8 to M15	2	5	12.6	11.1	14.9	30.0	15.1
	HT-40 STBC, M0 to M7	2	5	12.6	11.1	14.9	30.0	15.1
5230	Non HT-40, 6 to 54 Mbps	1	5	18.0		18.0	30.0	12.0
	Non HT-40, 6 to 54 Mbps	2	5	18.0	15.7	20.0	30.0	10.0
	HT-40, M0 to M7	1	5	17.4		17.4	30.0	12.6
	HT-40, M0 to M7	2	5	17.4	15.3	19.5	30.0	10.5
	HT-40, M8 to M15	2	5	17.4	15.3	19.5	30.0	10.5
	HT-40 Beam Forming, M0 to M7	2	8	12.2	10.3	14.4	28.0	13.6
	HT-40 Beam Forming, M8 to M15	2	5	17.4	15.3	19.5	30.0	10.5
	HT-40 STBC, M0 to M7	2	5	17.4	15.3	19.5	30.0	10.5
5240	Non HT-20, 6 to 54 Mbps	1	5	17.1		17.1	30.0	12.9
	Non HT-20, 6 to 54 Mbps	2	5	17.1	15.4	19.3	30.0	10.7
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	16.1	14.4	18.3	28.0	9.7
	HT-20, M0 to M7	1	5	17.0		17.0	30.0	13.0
	HT-20, M0 to M7	2	5	17.0	15.3	19.2	30.0	10.8
	HT-20, M8 to M15	2	5	17.0	15.3	19.2	30.0	10.8



HT-20 Beam Forming, M0 to M7	2	8	17.0	15.3	19.2	28.0	8.8
HT-20 Beam Forming, M8 to M15	2	5	17.0	15.3	19.2	30.0	10.8
HT-20 STBC, M0 to M7	2	5	17.0	15.3	19.2	30.0	10.8




Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5180	Non HT-20, 6 to 54 Mbps	1	5	5.8		5.8	17.0	11.2
	Non HT-20, 6 to 54 Mbps	2	8	-0.9	-2.5	1.4	15.0	13.6
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	-1.9	-3.2	0.5	15.0	14.5
	HT-20, M0 to M7	1	5	5.5		5.5	17.0	11.5
	HT-20, M0 to M7	2	8	-1.2	-2.4	1.3	15.0	13.7
	HT-20, M8 to M15	2	5	-1.2	-2.4	1.3	17.0	15.7
	HT-20 Beam Forming, M0 to M7	2	8	-1.9	-3.5	0.4	15.0	14.6
	HT-20 Beam Forming, M8 to M15	2	5	-1.2	-2.4	1.3	17.0	15.7
	HT-20 STBC, M0 to M7	2	5	-1.2	-2.4	1.3	17.0	15.7
5190	Non HT-40, 6 to 54 Mbps	1	5	2.2		2.2	17.0	14.8
	Non HT-40, 6 to 54 Mbps	2	8	1.4	-0.3	3.6	15.0	11.3
	HT-40, M0 to M7	1	5	0.5		0.5	17.0	16.5
	HT-40, M0 to M7	2	8	-1.4	-3.1	0.8	15.0	14.1
	HT-40, M8 to M15	2	5	-1.4	-3.1	0.8	17.0	16.2
	HT-40 Beam Forming, M0 to M7	2	8	-5.4	-6.9	-3.1	15.0	18.1
	HT-40 Beam Forming, M8 to M15	2	5	-1.4	-3.1	0.8	17.0	16.2
	HT-40 STBC, M0 to M7	2	5	-1.4	-3.1	0.8	17.0	16.2
5230	Non HT-40, 6 to 54 Mbps	1	5	4.2		4.2	17.0	12.8
	Non HT-40, 6 to 54 Mbps	2	8	4.2	2.1	6.3	15.0	8.7
	HT-40, M0 to M7	1	5	3.2		3.2	17.0	13.8
	HT-40, M0 to M7	2	8	3.2	1.2	5.3	15.0	9.7
	HT-40, M8 to M15	2	5	3.2	1.2	5.3	17.0	11.7
	HT-40 Beam Forming, M0 to M7	2	8	-1.7	-3.7	0.4	15.0	14.6
	HT-40 Beam Forming, M8 to M15	2	5	3.2	1.2	5.3	17.0	11.7
	HT-40 STBC, M0 to M7	2	5	3.2	1.2	5.3	17.0	11.7
5240	Non HT-20, 6 to 54 Mbps	1	5	6.4		6.4	17.0	10.6
	Non HT-20, 6 to 54 Mbps	2	8	6.4	4.7	8.6	15.0	6.3
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	5.4	3.8	7.7	15.0	7.3
	HT-20, M0 to M7	1	5	6.1		6.1	17.0	10.9
	HT-20, M0 to M7	2	8	6.1	4.3	8.3	15.0	6.7
	HT-20, M8 to M15	2	5	6.1	4.3	8.3	17.0	8.7




HT-20 Beam Forming, M0 to M7	2	8	6.1	4.3	8.3	15.0	6.7
HT-20 Beam Forming, M8 to M15	2	5	6.1	4.3	8.3	17.0	8.7
HT-20 STBC, M0 to M7	2	5	6.1	4.3	8.3	17.0	8.7



Peak Output Power, 5240 MHz, HT-20 Beam Forming, M0 to M7

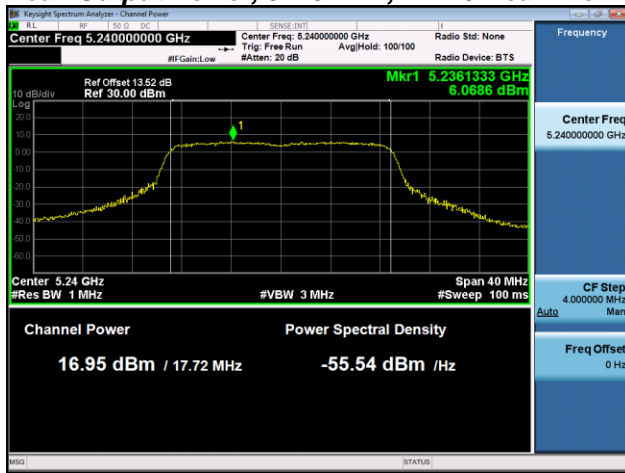


Antenna A

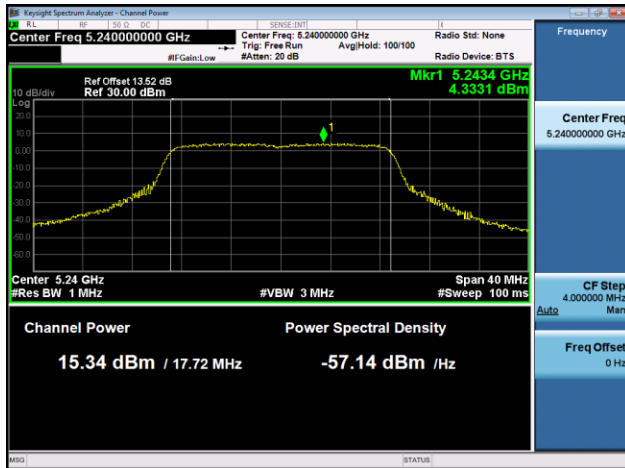

Antenna B



Power Spectral Density, 5240 MHz, Non HT-20, 6 to 54 Mbps

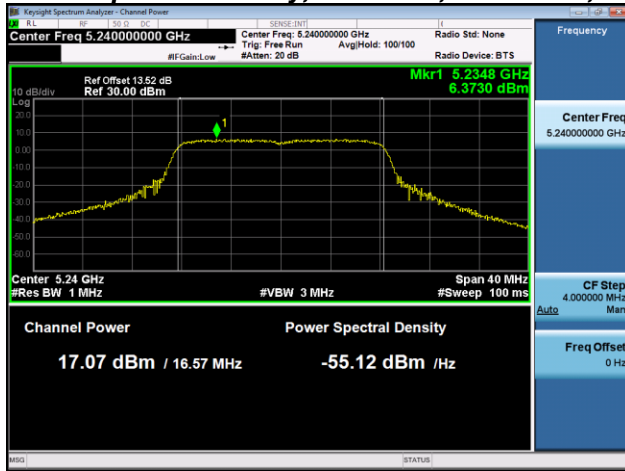

Antenna A



Antenna B



A.3 Conducted Spurious Emissions

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

Conducted Spurious Emissions
Test Procedure
<ol style="list-style-type: none"> 1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands. 5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. 6. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

Conducted Spurious Emissions
Test parameters
Span = 30MHz to 18GHz / 18GHz to 40GHz RBW = 1 MHz VBW ≥ 3 x RBW for Peak, 1kHz for Average Sweep = Auto couple Detector = Peak Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 08-Aug-15 - 01-Sep-15
Test Result : PASS	

See Appendix C for list of test equipment



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54 Mbps	1	5	-46.4		-41.4	-41.25	0.1
	Non HT-20, 6 to 54 Mbps	2	5	-48.8	-56.6	-43.1	-41.25	1.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	-56.6	-55.9	-45.2	-41.25	4.0
	HT-20, M0 to M7	1	5	-46.5		-41.5	-41.25	0.3
	HT-20, M0 to M7	2	5	-48.7	-56.7	-43.1	-41.25	1.8
	HT-20, M8 to M15	2	5	-48.7	-56.7	-43.1	-41.25	1.8
	HT-20 Beam Forming, M0 to M7	2	8	-55.9	-56.3	-45.1	-41.25	3.8
	HT-20 Beam Forming, M8 to M15	2	5	-48.7	-56.7	-43.1	-41.25	1.8
	HT-20 STBC, M0 to M7	2	5	-48.7	-56.7	-43.1	-41.25	1.8
5190	Non HT-40, 6 to 54 Mbps	1	5	-47.9		-42.9	-41.25	1.7
	Non HT-40, 6 to 54 Mbps	2	5	-47.0	-55.0	-41.4	-41.25	0.1
	HT-40, M0 to M7	1	5	-47.1		-42.1	-41.25	0.9
	HT-40, M0 to M7	2	5	-47.2	-54.2	-41.4	-41.25	0.2
	HT-40, M8 to M15	2	5	-47.2	-54.2	-41.4	-41.25	0.2
	HT-40 Beam Forming, M0 to M7	2	8	-50.2	-71.3	-42.2	-41.25	0.9
	HT-40 Beam Forming, M8 to M15	2	5	-47.2	-54.2	-41.4	-41.25	0.2
	HT-40 STBC, M0 to M7	2	5	-47.2	-54.2	-41.4	-41.25	0.2
5230	Non HT-40, 6 to 54 Mbps	1	5	-50.3		-45.3	-41.25	4.1
	Non HT-40, 6 to 54 Mbps	2	5	-50.3	-53.0	-43.4	-41.25	2.2
	HT-40, M0 to M7	1	5	-50.8		-45.8	-41.25	4.6
	HT-40, M0 to M7	2	5	-50.8	-53.6	-44.0	-41.25	2.7
	HT-40, M8 to M15	2	5	-50.8	-53.6	-44.0	-41.25	2.7
	HT-40 Beam Forming, M0 to M7	2	8	-52.0	-53.2	-41.5	-41.25	0.3
	HT-40 Beam Forming, M8 to M15	2	5	-50.8	-53.6	-44.0	-41.25	2.7
	HT-40 STBC, M0 to M7	2	5	-50.8	-53.6	-44.0	-41.25	2.7
5240	Non HT-20, 6 to 54 Mbps	1	5	-51.3		-46.3	-41.25	5.1
	Non HT-20, 6 to 54 Mbps	2	5	-51.3	-53.3	-44.2	-41.25	2.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	-51.9	-53.3	-41.5	-41.25	0.3
	HT-20, M0 to M7	1	5	-51.3		-46.3	-41.25	5.1
	HT-20, M0 to M7	2	5	-51.3	-53.6	-44.3	-41.25	3.0
	HT-20, M8 to M15	2	5	-51.3	-53.6	-44.3	-41.25	3.0



HT-20 Beam Forming, M0 to M7	2	8	-51.3	-53.6	-41.3	-41.25	0.0
HT-20 Beam Forming, M8 to M15	2	5	-51.3	-53.6	-44.3	-41.25	3.0
HT-20 STBC, M0 to M7	2	5	-51.3	-53.6	-44.3	-41.25	3.0




Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54 Mbps	1	5	-61.6		-56.6	-21.25	35.4
	Non HT-20, 6 to 54 Mbps	2	5	-62.4	-61.2	-53.7	-21.25	32.5
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	-62.8	-61.5	-51.1	-21.25	29.8
	HT-20, M0 to M7	1	5	-59.5		-54.5	-21.25	33.3
	HT-20, M0 to M7	2	5	-63.0	-63.8	-55.4	-21.25	34.1
	HT-20, M8 to M15	2	5	-63.0	-63.8	-55.4	-21.25	34.1
	HT-20 Beam Forming, M0 to M7	2	8	-61.7	-61.7	-50.7	-21.25	29.4
	HT-20 Beam Forming, M8 to M15	2	5	-63.0	-63.8	-55.4	-21.25	34.1
	HT-20 STBC, M0 to M7	2	5	-63.0	-63.8	-55.4	-21.25	34.1
5190	Non HT-40, 6 to 54 Mbps	1	5	-62.1		-57.1	-21.25	35.9
	Non HT-40, 6 to 54 Mbps	2	5	-62.1	-62.7	-54.4	-21.25	33.1
	HT-40, M0 to M7	1	5	-61.6		-56.6	-21.25	35.4
	HT-40, M0 to M7	2	5	-62.8	-60.8	-53.7	-21.25	32.4
	HT-40, M8 to M15	2	5	-62.8	-60.8	-53.7	-21.25	32.4
	HT-40 Beam Forming, M0 to M7	2	8	-62.0	-60.2	-50.0	-21.25	28.7
	HT-40 Beam Forming, M8 to M15	2	5	-62.8	-60.8	-53.7	-21.25	32.4
	HT-40 STBC, M0 to M7	2	5	-62.8	-60.8	-53.7	-21.25	32.4
5230	Non HT-40, 6 to 54 Mbps	1	5	-61.2		-56.2	-21.25	35.0
	Non HT-40, 6 to 54 Mbps	2	5	-61.2	-62.1	-53.6	-21.25	32.4
	HT-40, M0 to M7	1	5	-63.5		-58.5	-21.25	37.3
	HT-40, M0 to M7	2	5	-63.5	-63.6	-55.5	-21.25	34.3
	HT-40, M8 to M15	2	5	-63.5	-63.6	-55.5	-21.25	34.3
	HT-40 Beam Forming, M0 to M7	2	8	-63.5	-63.0	-52.2	-21.25	31.0
	HT-40 Beam Forming, M8 to M15	2	5	-63.5	-63.6	-55.5	-21.25	34.3
	HT-40 STBC, M0 to M7	2	5	-63.5	-63.6	-55.5	-21.25	34.3
5240	Non HT-20, 6 to 54 Mbps	1	5	-57.4		-52.4	-21.25	31.2
	Non HT-20, 6 to 54 Mbps	2	5	-57.4	-63.3	-51.4	-21.25	30.2
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	-62.5	-62.4	-51.4	-21.25	30.2
	HT-20, M0 to M7	1	5	-61.3		-56.3	-21.25	35.1
	HT-20, M0 to M7	2	5	-61.3	-61.6	-53.4	-21.25	32.2
	HT-20, M8 to M15	2	5	-61.3	-61.6	-53.4	-21.25	32.2




HT-20 Beam Forming, M0 to M7	2	8	-61.3	-61.6	-50.4	-21.25	29.2
HT-20 Beam Forming, M8 to M15	2	5	-61.3	-61.6	-53.4	-21.25	32.2
HT-20 STBC, M0 to M7	2	5	-61.3	-61.6	-53.4	-21.25	32.2



Conducted Spurs Average, All Antennas

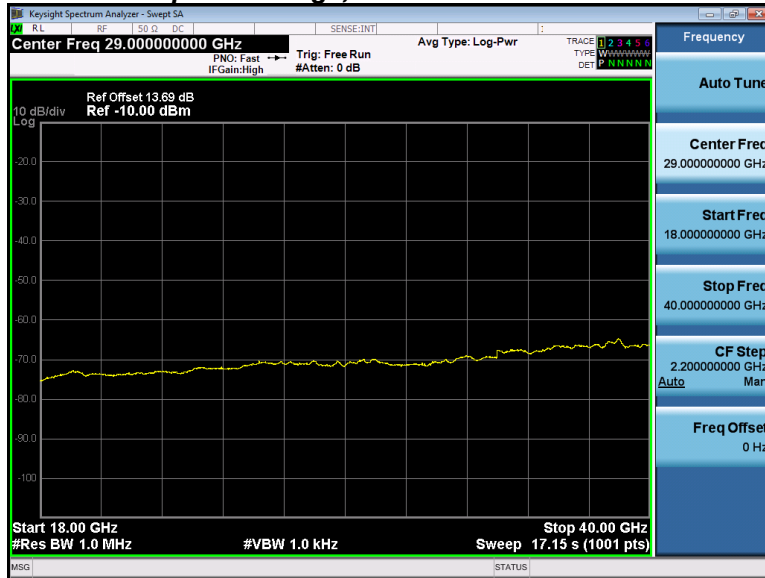

Conducted Spurs Peak, All Antennas

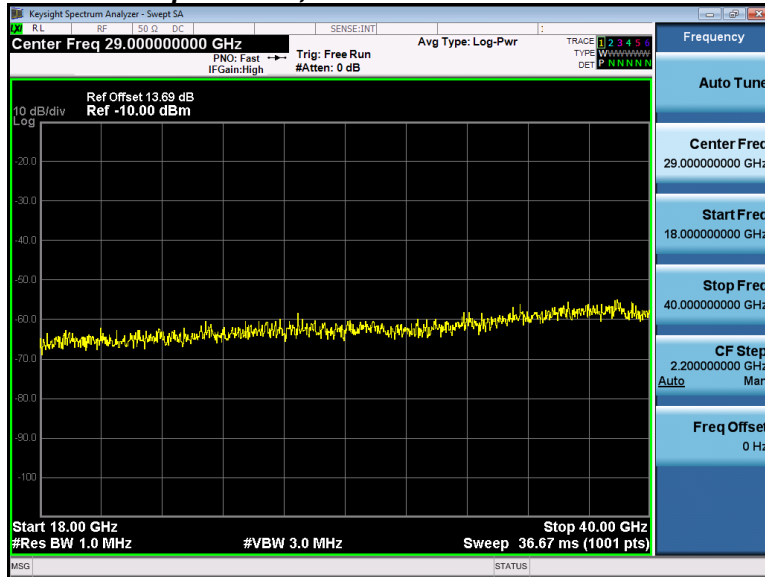




Conducted Spurs Average, 5240 MHz, HT-20 Beam Forming, M0 to M7




Antenna A

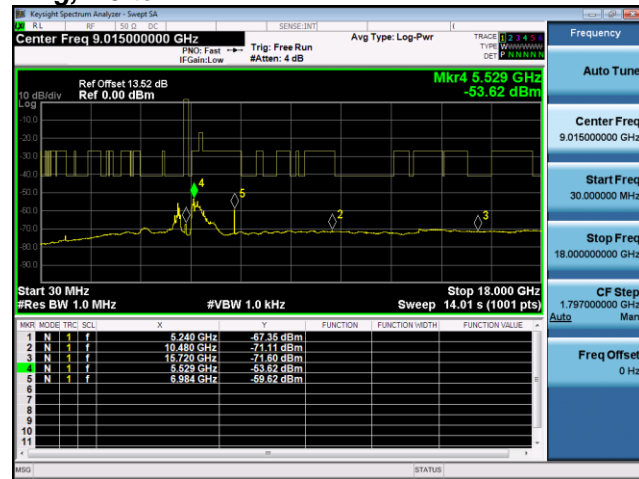


Antenna B



Conducted Spurs Peak, 5190 MHz, HT-40 Beam Forming, M0 to M7

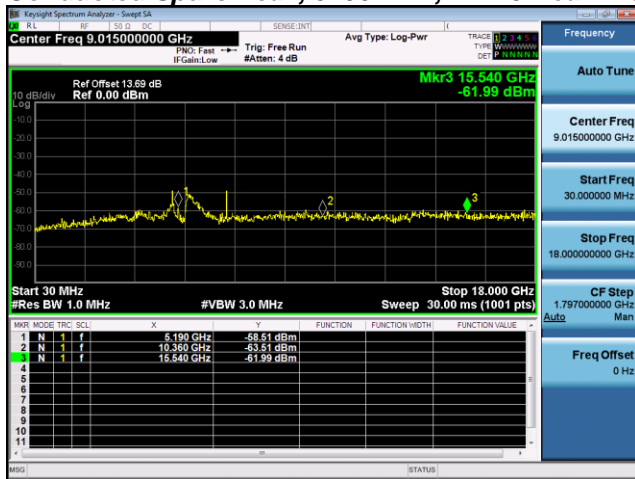

Antenna A

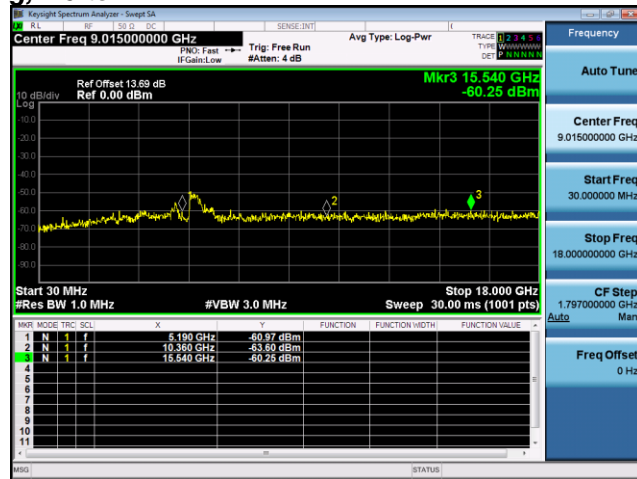

Antenna B



A.4 Conducted Band edge

15.407 (b) *Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Procedure

Ref. ANSI C63.10: 2013

Conducted Band edge
Test Procedure
<ol style="list-style-type: none"> 1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. 5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. 6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands 7. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

Conducted Band edge
Test parameters restricted Band
RBW = 1 MHz VBW ≥ 3 x RBW for Peak, 100Hz for Average Sweep = Auto couple Detector = Peak Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 08-Aug-15 - 01-Sep-15
Test Result : PASS	

See Appendix C for list of test equipment




Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54 Mbps	1	5	-52.2		-47.2	-41.25	6.0
	Non HT-20, 6 to 54 Mbps	2	5	-52.2	-50.1	-43.0	-41.25	1.8
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	-55.4	-50.5	-41.3	-41.25	0.0
	HT-20, M0 to M7	1	5	-51.9		-46.9	-41.25	5.7
	HT-20, M0 to M7	2	5	-51.9	-50.1	-42.9	-41.25	1.6
	HT-20, M8 to M15	2	5	-51.9	-50.1	-42.9	-41.25	1.6
	HT-20 Beam Forming, M0 to M7	2	8	-56.5	-50.4	-41.4	-41.25	0.2
	HT-20 Beam Forming, M8 to M15	2	5	-51.9	-50.1	-42.9	-41.25	1.6
	HT-20 STBC, M0 to M7	2	5	-51.9	-50.1	-42.9	-41.25	1.6
5190	Non HT-40, 6 to 54 Mbps	1	5	-47.9		-42.9	-41.25	1.7
	Non HT-40, 6 to 54 Mbps	2	5	-49.6	-50.1	-41.8	-41.25	0.6
	HT-40, M0 to M7	1	5	-47.0		-42.0	-41.25	0.8
	HT-40, M0 to M7	2	5	-48.8	-49.8	-41.3	-41.25	0.0
	HT-40, M8 to M15	2	5	-48.8	-49.8	-41.3	-41.25	0.0
	HT-40 Beam Forming, M0 to M7	2	8	-55.4	-53.4	-43.3	-41.25	2.0
	HT-40 Beam Forming, M8 to M15	2	5	-48.8	-49.8	-41.3	-41.25	0.0
	HT-40 STBC, M0 to M7	2	5	-48.8	-49.8	-41.3	-41.25	0.0




Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT-20, 6 to 54 Mbps	1	5	-41.9		-36.9	-21.25	15.7
	Non HT-20, 6 to 54 Mbps	2	5	-41.9	-39.0	-32.2	-21.25	11.0
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	8	-42.0	-44.3	-32.0	-21.25	10.7
	HT-20, M0 to M7	1	5	-41.3		-36.3	-21.25	15.1
	HT-20, M0 to M7	2	5	-41.3	-42.7	-33.9	-21.25	12.7
	HT-20, M8 to M15	2	5	-41.3	-42.7	-33.9	-21.25	12.7
	HT-20 Beam Forming, M0 to M7	2	8	-42.0	-42.8	-31.4	-21.25	10.1
	HT-20 Beam Forming, M8 to M15	2	5	-41.3	-42.7	-33.9	-21.25	12.7
	HT-20 STBC, M0 to M7	2	5	-41.3	-42.7	-33.9	-21.25	12.7
5190	Non HT-40, 6 to 54 Mbps	1	5	-33.1		-28.1	-21.25	6.9
	Non HT-40, 6 to 54 Mbps	2	5	-41.0	-43.0	-33.9	-21.25	12.6
	HT-40, M0 to M7	1	5	-37.1		-32.1	-21.25	10.9
	HT-40, M0 to M7	2	5	-39.1	-43.6	-32.8	-21.25	11.5
	HT-40, M8 to M15	2	5	-39.1	-43.6	-32.8	-21.25	11.5
	HT-40 Beam Forming, M0 to M7	2	8	-45.5	-48.6	-35.8	-21.25	14.5
	HT-40 Beam Forming, M8 to M15	2	5	-39.1	-43.6	-32.8	-21.25	11.5
	HT-40 STBC, M0 to M7	2	5	-39.1	-43.6	-32.8	-21.25	11.5



Conducted Bandedge Average, 5190 MHz, HT-40, M0 to M7

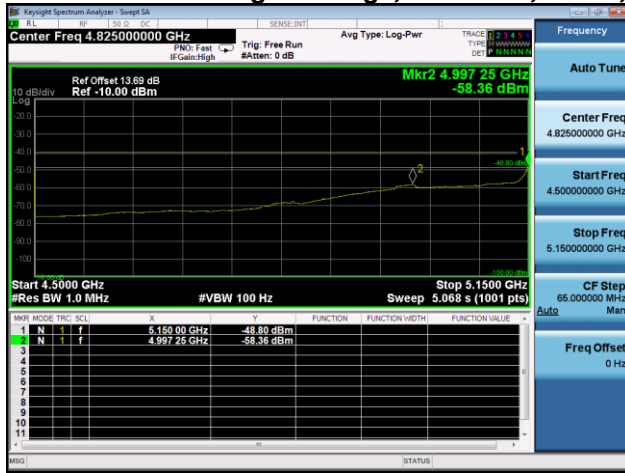

Antenna A

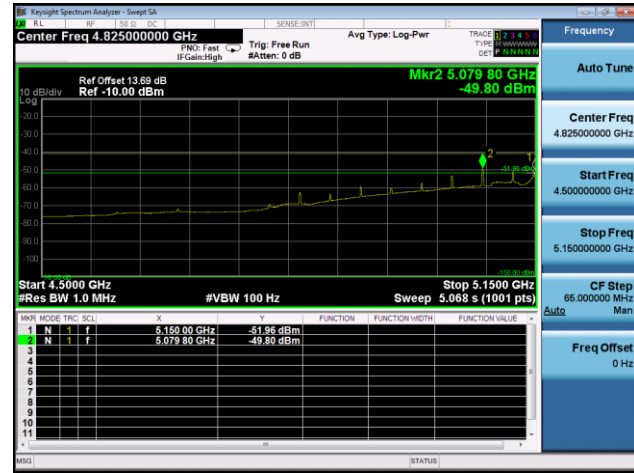

Antenna B



Conducted Bandedge Peak, 5190 MHz, Non HT-40, 6 to 54 Mbps




Antenna A


Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

Radiated Emission Setup Diagram-Below 1G

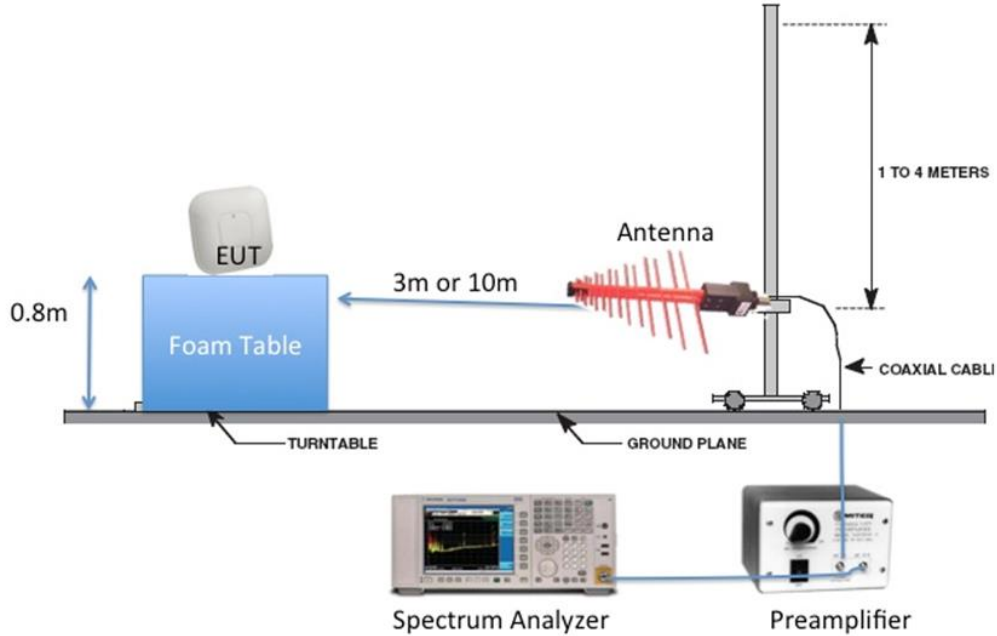

Radiated Emission Setup Diagram-Above 1G

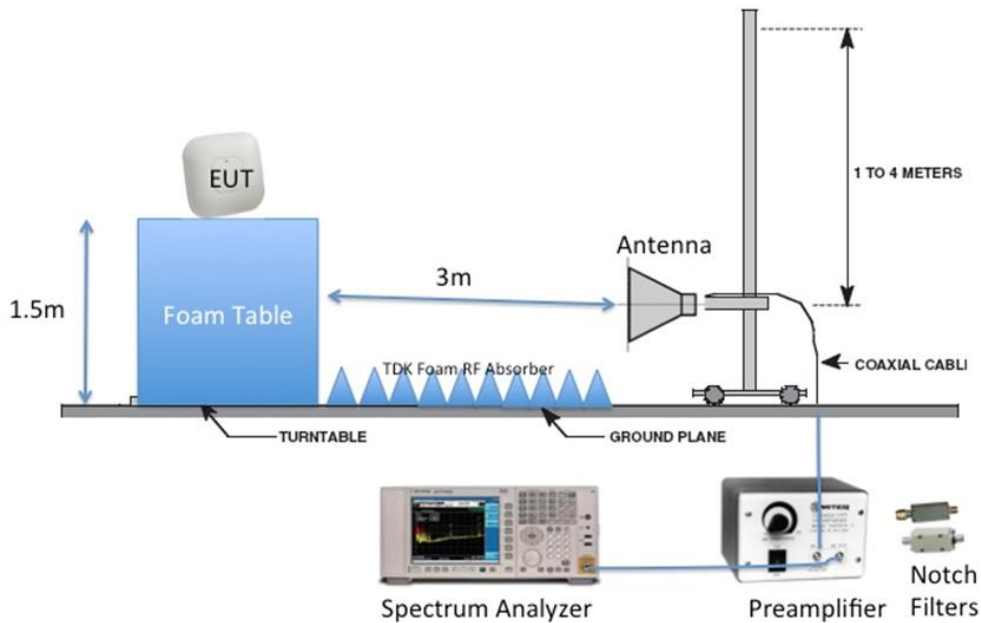



B1 Radiated Spurious Emissions

15.205 / 15.407 Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 1GHz – 18 GHz
 Reference Level: 80 dBuV
 Attenuation: 10 dB
 Sweep Time: Coupled
 Resolution Bandwidth: 1MHz
 Video Bandwidth: 3 MHz for peak, 1 kHz for average
 Detector: Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 12-Aug-2015 – 17-Aug-2015
Test Result : PASS	

See Appendix C for list of test equipment

**B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)
5180	6 to 54 Mbps	6	51.2	54	-2.8
5190	HT/VHT40, M0 to M23, M0.0 to M9.4	m0	51.3	54	-2.7
5200	6 to 54 Mbps	6	51.2	54	-2.8
5240	6 to 54 Mbps	6	51.3	54	-2.7
5230	HT/VHT40, M0 to M23, M0.0 to M9.4	m0	51.4	54	-2.6



B.1.A.1 Radiated Transmitter Spurs, 5180 MHz, 6 to 54 Mbps , Average (1-18GHz)



B.1.A.2 Radiated Transmitter Spurs, 5190 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Average (1-18GHz)



B.1.A.4 Radiated Transmitter Spurs, 5200 MHz, 6 to 54 Mbps , Average (1-18GHz)




B.1.A.5 Radiated Transmitter Spurs, 5240 MHz, 6 to 54 Mbps , Average (1-18GHz)



B.1.A.6 Radiated Transmitter Spurs, 5230 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Average (1-18GHz)



B.1.A.7 Radiated Transmitter Spurs, All rate, All modes, Average (18-26.5GHz) Vertical

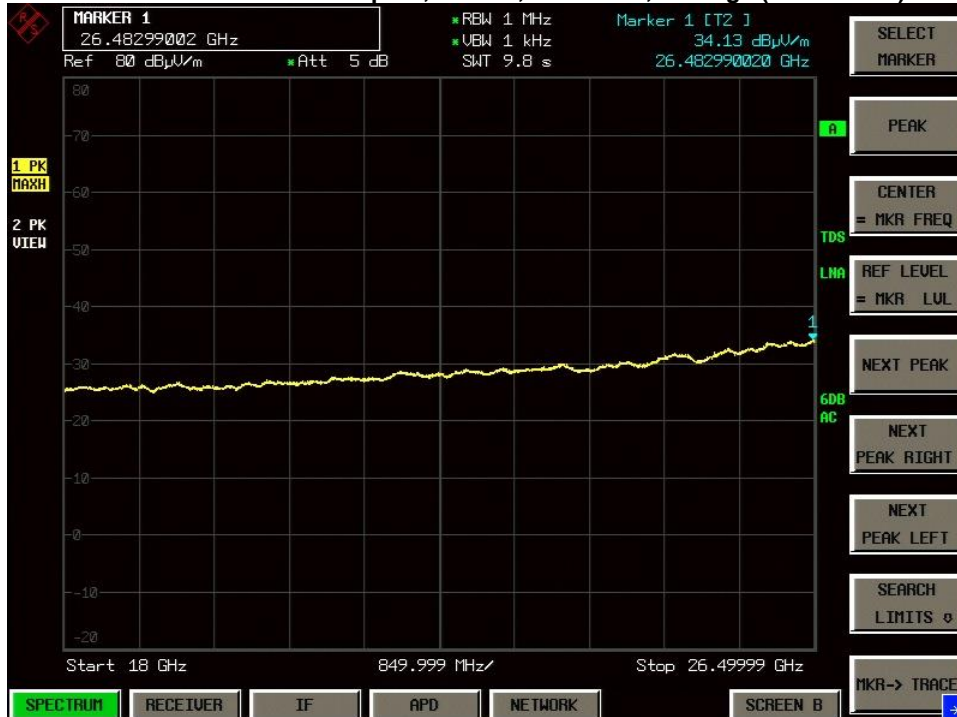



B.1.A.9 Radiated Transmitter Spurs, All rate, All modes, Average (26.5- 40GHz) Vertical




**B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)
5180	6 to 54 Mbps	6	61.6	74	-12.4
5190	HT/VHT40, M0 to M23	m0	61.7	74	-12.3
5200	6 to 54 Mbps	6	62.2	74	-11.8
5240	6 to 54 Mbps	6	61.2	74	-12.8
5230	HT/VHT40, M0 to M23	m0	61.2	74	-12.8



B.1.P.1 Radiated Transmitter Spurs, 5180 MHz, 6 to 54 Mbps , (1-18GHz)

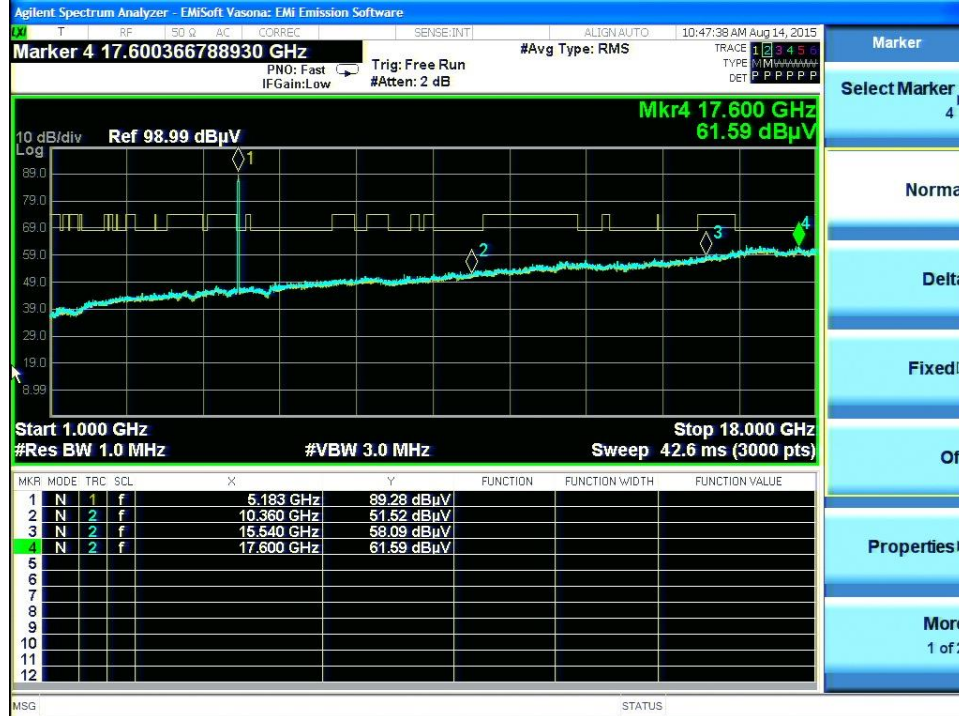

B.1.P.2 Radiated Transmitter Spurs, 5190 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)



B.1.P.4 Radiated Transmitter Spurs, 5220 MHz, 6 to 54 Mbps , Peak (1-18GHz)




B.1.P.5 Radiated Transmitter Spurs, 5240 MHz, 6 to 54 Mbps , Peak (1-18GHz)



B.1.P.6 Radiated Transmitter Spurs, 5230 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)



B.1.P.7 Radiated Transmitter Spurs, All rate, All modes, Peak (18-26.5GHz) Horizontal & Vertical

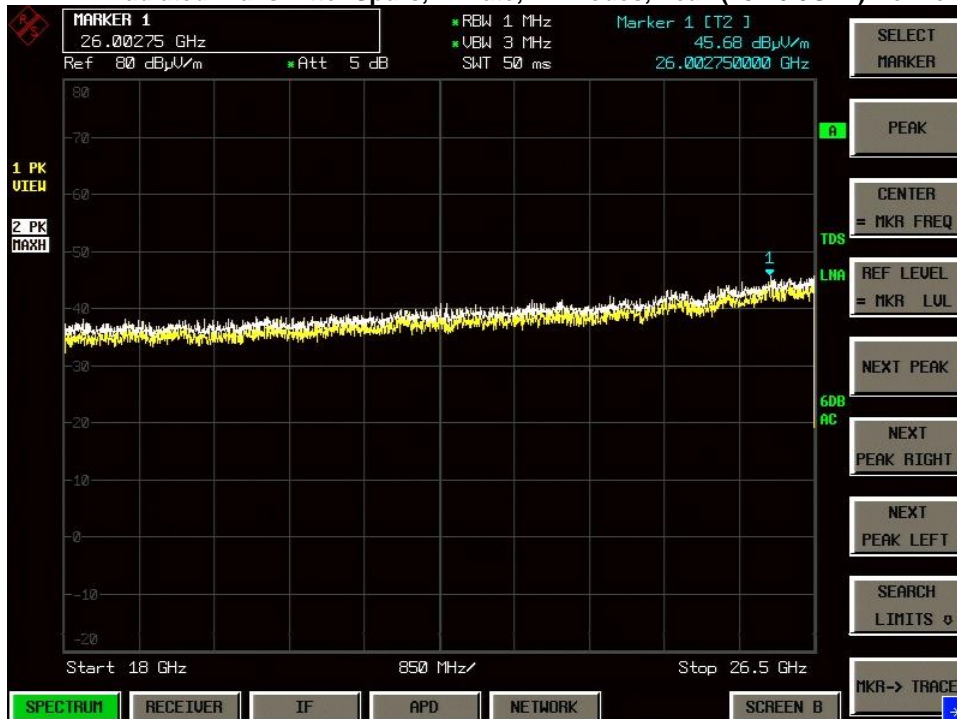



B.1.P.8 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz) Horizontal & Vertical





B.2 Radiated Emissions 30MHz to 1GHz

15.209 / 15.205 / 15.407:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak

Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System #	Description	Samples
1	EUT	S01
2	Support Power Supply	S02


Tested By : Jose Aguirre	Date of testing: 12-Aug-2015 – 17-Aug-2015
Test Result : PASS	

See Appendix C for list of test equipment



Graphical Test Results

Note that the data displayed on the plots detailed in this appendix were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements

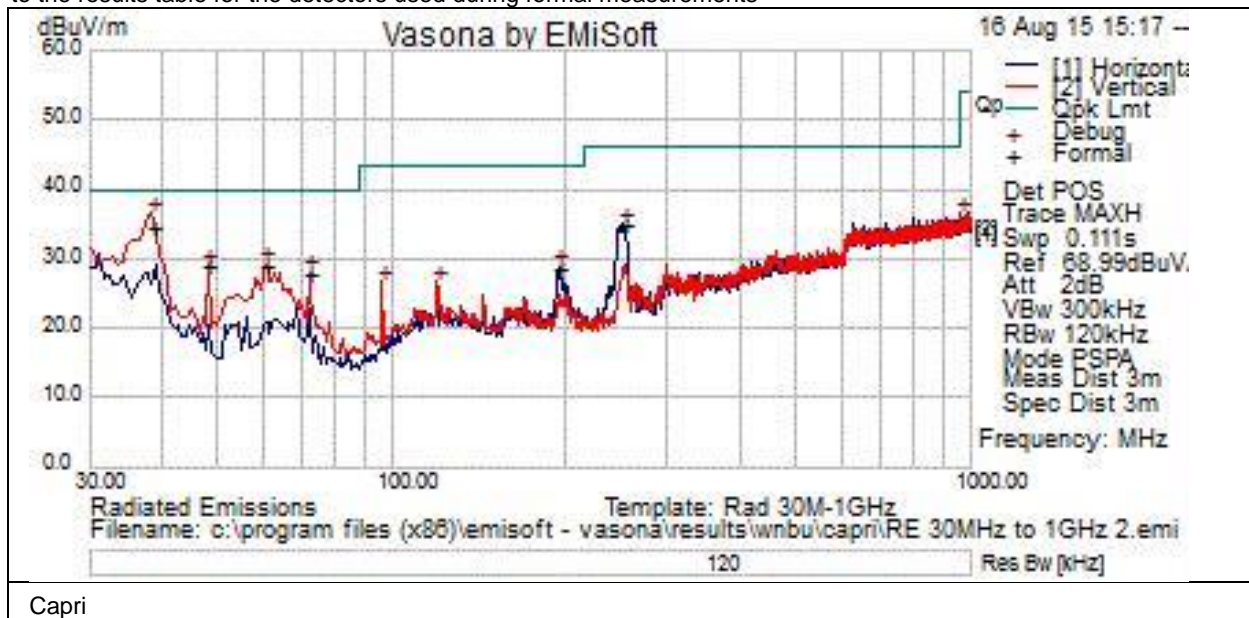

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
38.488	19.5	0.5	14.5	34.5	Qp	V	100	332	40	-5.5	Pass	
60.312	21.3	0.7	7.2	29.2	Peak	V	100	112	40	-10.8	Pass	
48.188	20	0.6	8.4	29	Peak	V	100	275	40	-11	Pass	
251.281	22.1	1.3	11.5	35	Peak	H	100	24	46	-11	Pass	
71.831	19.3	0.7	7.9	27.9	Peak	V	100	46	40	-12.1	Pass	
194.294	16.1	1.2	11.5	28.8	Peak	H	100	141	43.5	-14.7	Pass	



B.3 AC Conducted Emissions

FCC 15.207 Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure
 Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 150 KHz – 30 MHz
 Attenuation: 10 dB
 Sweep Time: Coupled
 Resolution Bandwidth: 9 KHz
 Video Bandwidth: 30 KHz
 Detector: Quasi-Peak / Average

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>


Tested By : Jose Aguirre	Date of testing: 08-Aug-15 - 01-Sep-15
Test Result : PASS	

See Appendix C for list of test equipment



Graphical Test Results


Note that the data displayed on the plots detailed in this appendix were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements

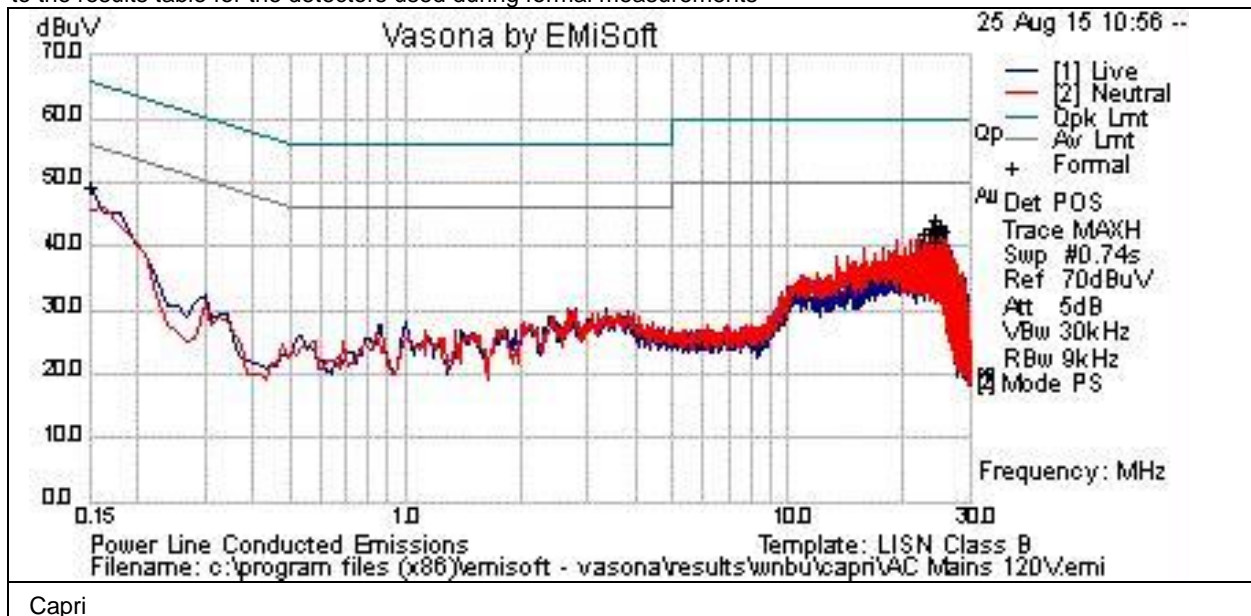

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
0.15	28.4	21.1	0.1	49.5	Peak	L	56	-6.5	Pass
0.151	28.4	21.1	0	49.5	Peak	N	55.9	-6.4	Pass
22.627	21.3	20.7	0.2	42.1	Peak	L	50	-7.9	Pass
23.358	21.2	20.8	0.2	42.2	Peak	L	50	-7.8	Pass
23.606	21.7	20.8	0.2	42.7	Peak	N	50	-7.3	Pass
24.102	21.6	20.8	0.2	42.6	Peak	N	50	-7.4	Pass
24.35	23.1	20.8	0.2	44.1	Peak	N	50	-5.9	Pass
24.352	19.7	20.8	0.2	40.6	Peak	L	50	-9.4	Pass
24.597	21.6	20.7	0.2	42.5	Peak	L	50	-7.5	Pass
24.847	22.5	20.6	0.2	43.3	Peak	N	50	-6.7	Pass
25.096	22.2	20.6	0.2	42.9	Peak	N	50	-7.1	Pass
25.343	21.7	20.6	0.2	42.5	Peak	L	50	-7.5	Pass

Test Setup Photos

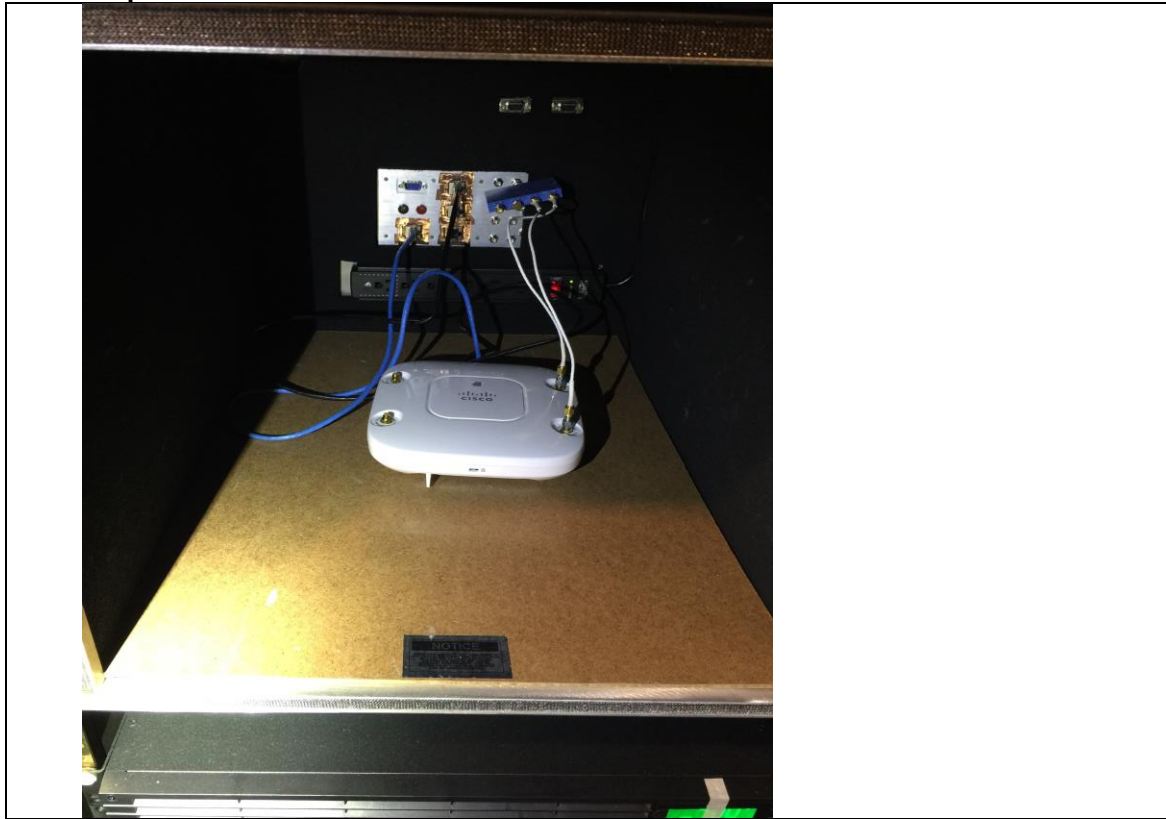


Title: Conducted Emissions Configuration Photograph

AIR-CAP702I-B-K9 Radiated Emissions setup 30MHz to 1GHz



AIR-CAP702I-B-K9 Radiated Emissions setup above 1GHz

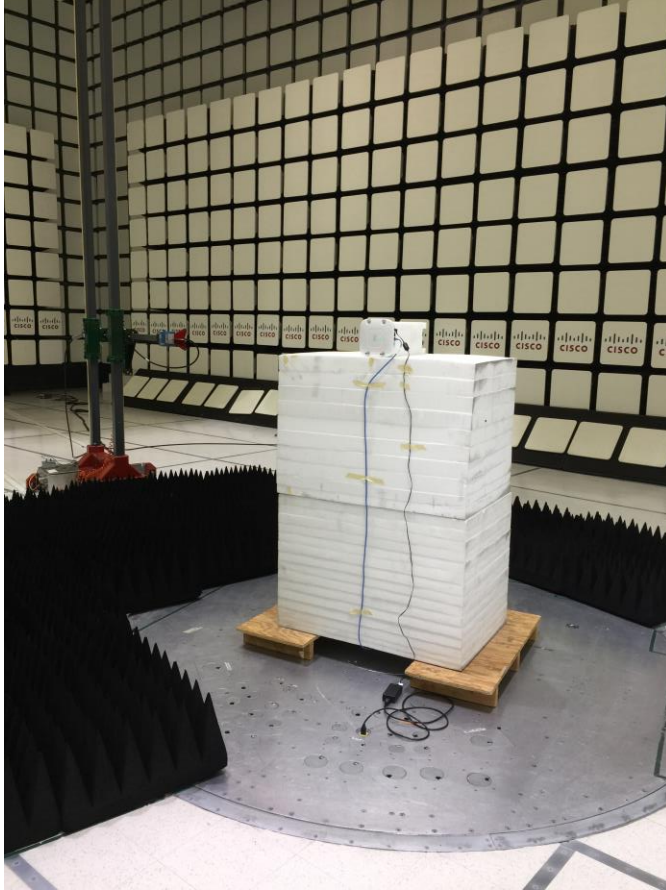

AIR-CAP702I-B-K9 AC Conducted Emissions setup





Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for Radiated Emissions					
CIS008447	Cisco / NSA 10m Chamber	NSA 10m Chamber	14-Oct-14	14-Oct-15	B.2
CIS030652	Sunol Sciences / JB1	Combination Antenna, 30MHz-2GHz	5-Nov-14	5-Nov-15	B.2
CIS033988	Agilent /E4446A	PSA Spectrum Analyzer	9-Dec-14	9-Dec-15	B.1
CIS044940	ROHDE & SCHWARZ / ESU40	EMI RECEIVER, 40GHZ	27-May-15	27-May-16	B.1
CIS041929	Newport /iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cable	20-Dec-14	20-Dec-15	B.1, B.2
CIS024998	MICRO-COAX / UFB197C-1-0240-504504	Coaxial RF Cable, 26.5 GHz	11-Mar-15	11-Mar-16	B.1
CIS035284	ETS Lindgren / 3117	Double Ridged Horn Antenna	16-Sep-14	16-Sep-15	B.1
CIS049516	Keysight / N9030A	PXA Spectrum Analyzer	12-Nov-14	12-Nov-15	B.1
CIS043124	Cisco /Above 1GHz Site Cal	Above 1GHz Cisp Site Verification	15-Jan-15	15-Jan-16	B.1
CIS008166	HP / 8491B Opt 010	10dB Attenuator	2-Feb-15	2-Feb-16	B.1
CIS020975	Micro-Coax / UFB311A-0-1344-520520	RF Coaxial Cable, to 18GHz, 134.4 in	18-Feb-15	18-Feb-16	B.1, B.2
CIS030559	Micro-Coax / UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	20-Feb-15	20-Feb-16	B.1, B.2
CIS003003	HP / 83731B	Synthesized Signal Generator	13-Mar-15	13-Mar-16	B.1
CIS005691	Miteq / NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	25-Jun-15	25-Jun-16	B.1
CIS041979	Cisco / 1840	18-40GHz EMI Test Head/Verification Fixture	13-Jul-15	13-Jul-16	B.1
CIS004882	EMC Test Systems / 3115	Double Ridge Guide Horn Antenna	24-Jul-15	24-Jul-16	B.1
CIS047410	Agilent / N9038A	EMI Receiver	17-Feb-15	17-Feb-16	B.1, B.2
CIS051642	Huber+Suhner / Sucoflex 106PA	RF N Type Cable 8.5m	10-Feb-15	10-Feb-16	B.1, B.2

Test Equipment used for AC Mains Conducted Emissions					
CIS019206	TTE / H785-150K-50-21378	High Pas Filter,Fo=150kHz	09-SEP-14	09-SEP-15	B.3
CIS030562	Micro-Coax / UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	26-JUN-15	26-JUN-16	B.3
CIS041929	Newport / iBTHP-5-DB9	5 inch Temp/RH/Press Sensor	20-DEC-14	20-DEC-15	B.3
CIS045015	Huber + Suhner/ Sucoflex 106PA	Sucoflex N Type Black 7ft cable	28-OCT-14	28-OCT-15	B.3
CIS047300	Agilent Technologies / N9038A	MXE EMI Receiver 20Hz to 26.5 Ghz	13-Jan-15	13-Jan-16	B.3
CIS008471	Bird 5-T-MB	50 Ohm, 5W Terminator,Type BNC	18-SEP-14	18-SEP-15	B.3
CIS019337	Fischer Custom Communications FCC-LISN-50/250-50-2-01	LISN	08-SEP-14	08-SEP-15	B.3
CIS019136	Fischer Custom Communications FCC-801-M3-32A	Power Line Coupling/Decoupling Network	12-NOV-14	12-NOV-15	B.3



RF Conducted at output antenna port					
CIS050378	Agilent / N9030A	PXA Spectrum Analyzer	5-Jan-15	5-Jan-16	A1 thru A4
CIS051695	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A4
CIS051684	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	29-May-15	29-May-16	A1 thru A4
CIS051690	Dynaware / 5400-9810-6251	SMA 50 Ohm Termination 18GHz	1-Jun-15	1-Jun-16	A1 thru A4
CIS047282	Huber + Suhner / Sucoflex 102E	40GHz Cable K Connector	1-Jun-15	1-Jun-16	A1 thru A4
CIS032307	Micro-Tronics / BRM50702-02	2.4-2.5G Notch Filter	3-Oct-14	3-Oct-15	A1 thru A4
CIS035606	Micro-Tronics / BRM50704-02	5.470-5.725G Notch Filter	3-Oct-14	3-Oct-15	A1 thru A4
CIS043988	Micro-Tronics / BRM50703-02	5.15-5.35G Notch Filter	3-Oct-14	3-Oct-15	A1 thru A4
CIS043989	Micro-Tronics / BRM50705-02	5.725-5.875G Notch Filter	3-Oct-14	3-Oct-15	A1 thru A4



Appendix E: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1x10 ³)
EN	European Norm	MHz	MegaHertz (1x10 ⁶)
IEC	International Electro technical Commission	GHz	Gigahertz (1x10 ⁹)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1x10 ³)
L1	Line 1	μV	Microvolt (1x10 ⁻⁶)
L2	Line2	A	Amp
L3	Line 3	μA	Micro Amp (1x10 ⁻⁶)
DC	Direct Current	mS	Milli Second (1x10 ⁻³)
RAW	Uncorrected measurement value, as indicated by the measuring device	μS	Micro Second (1x10 ⁻⁶)
RF	Radio Frequency	μS	Micro Second (1x10 ⁻⁶)
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current



End