





**Conducted Spurs Peak, 2462 MHz, HT-20, M0 to M7**

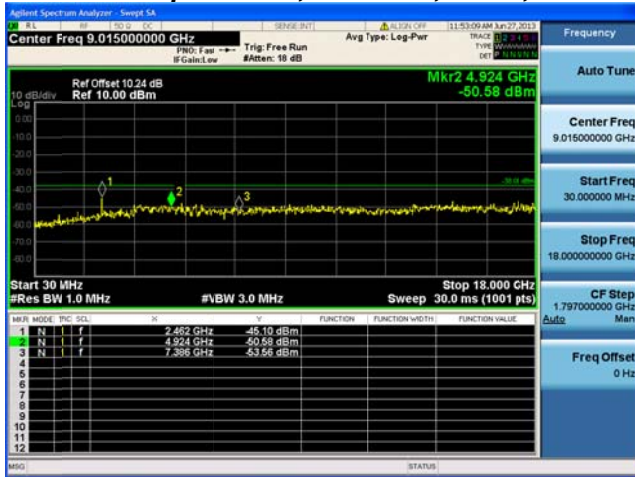


**Antenna A**

**Conducted Spurs Peak, 2462 MHz, HT-20, M0 to M7**

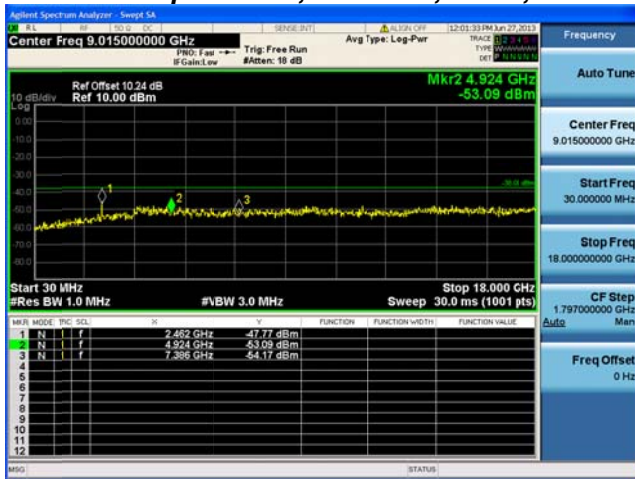


**Antenna A**

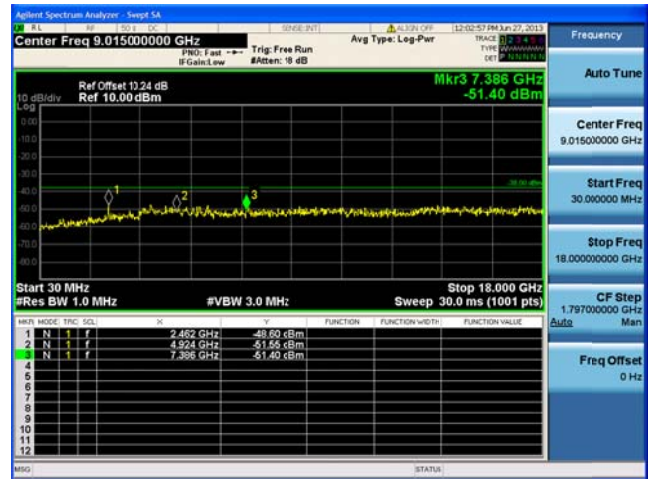


**Antenna B**



**Conducted Spurs Peak, 2462 MHz, HT-20, M8 to M15**

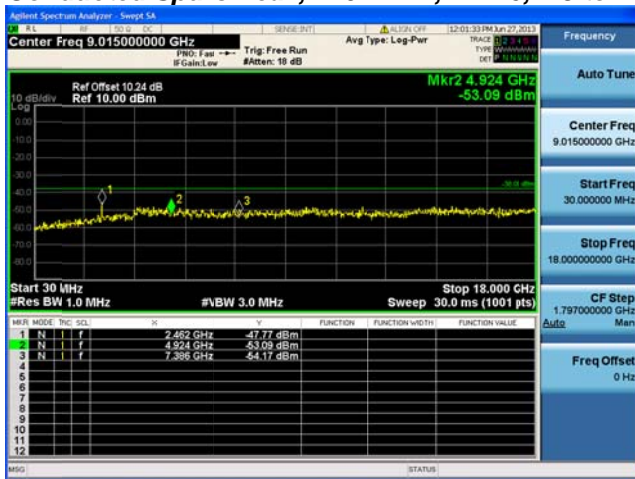


**Antenna A**

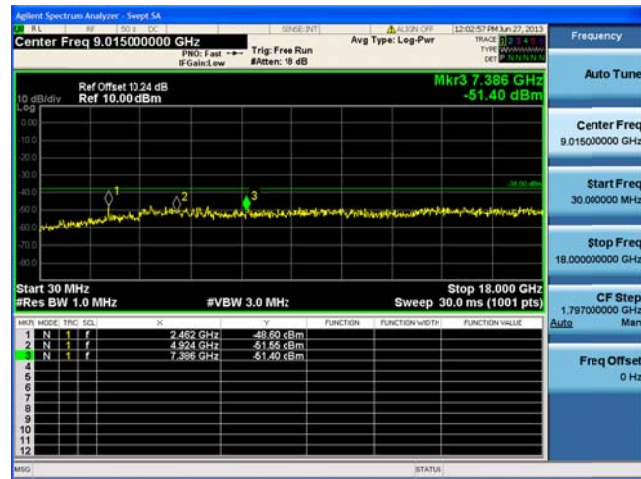


**Antenna B**




**Conducted Spurs Peak, 2462 MHz, HT-20, M0 to M7**

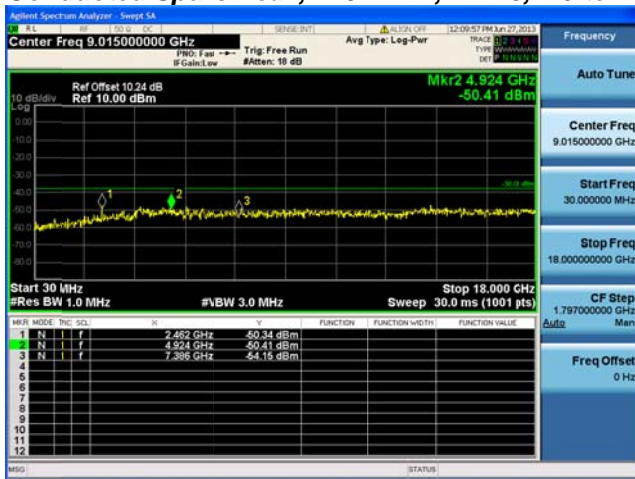

**Antenna A**

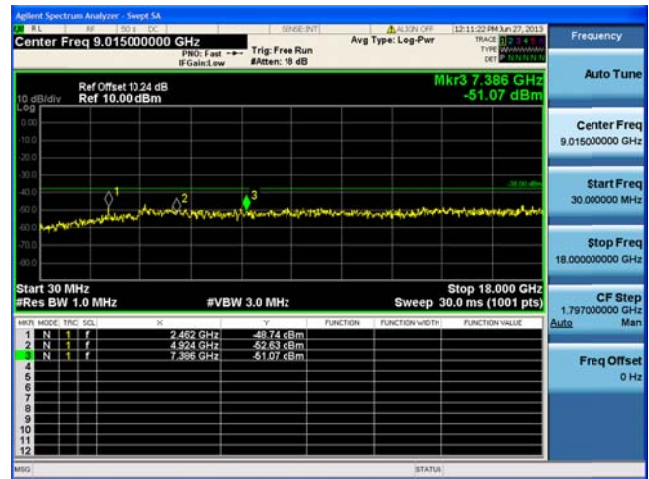


**Antenna B**

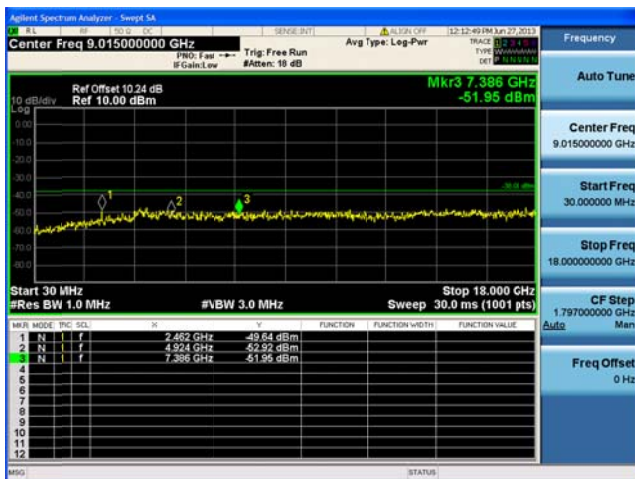


**Antenna C**




**Conducted Spurs Peak, 2462 MHz, HT-20, M8 to M15**

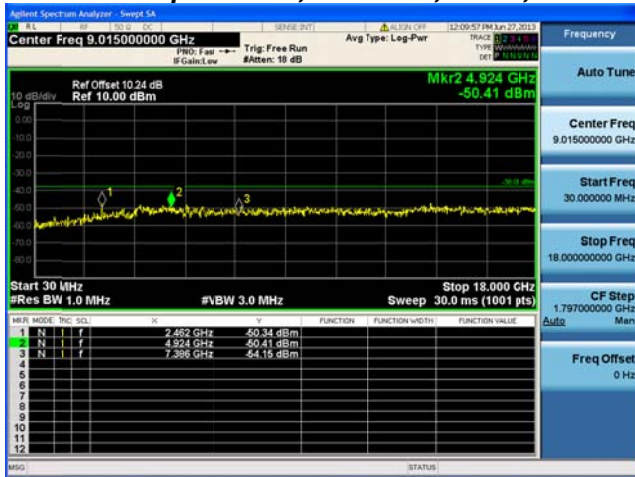

**Antenna A**

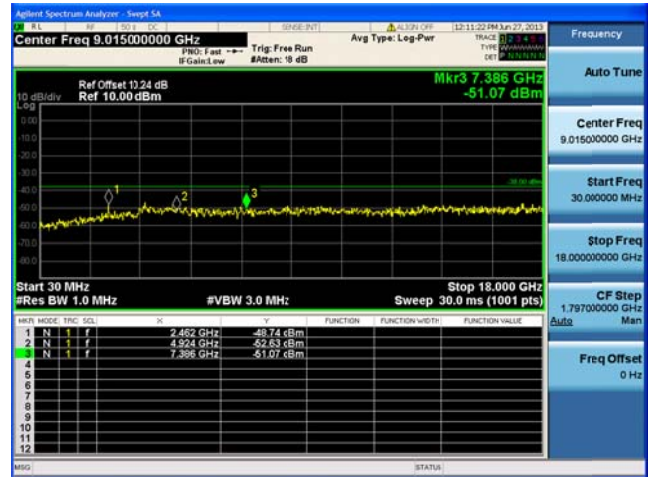


**Antenna B**

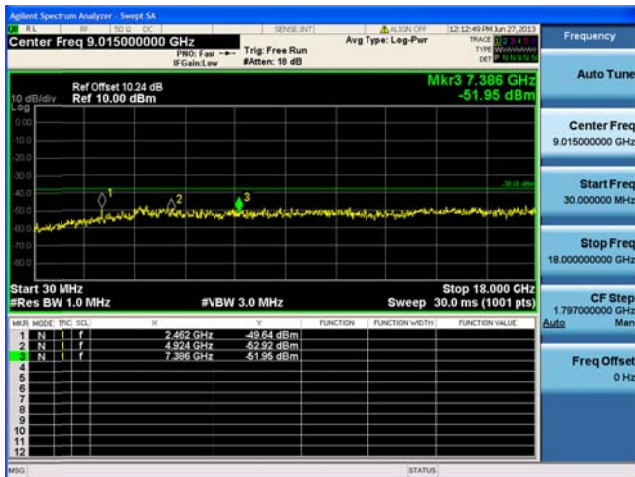


**Antenna C**




**Conducted Spurs Peak, 2462 MHz, HT-20, M16 to M23**

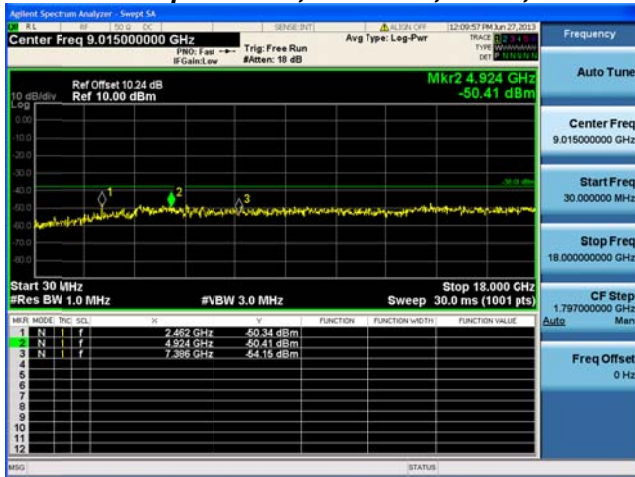

**Antenna A**

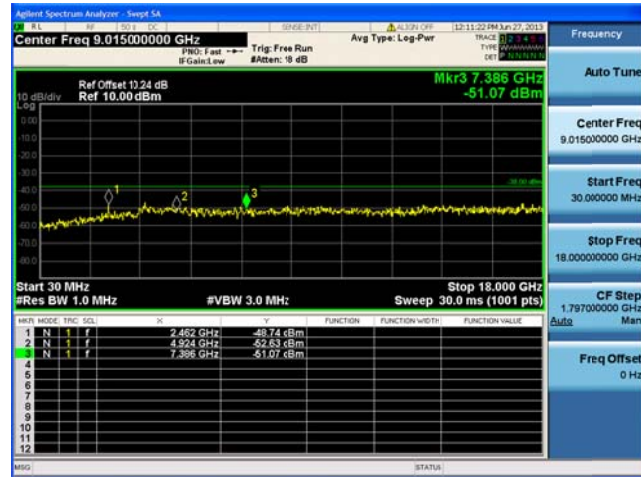

**Antenna B**

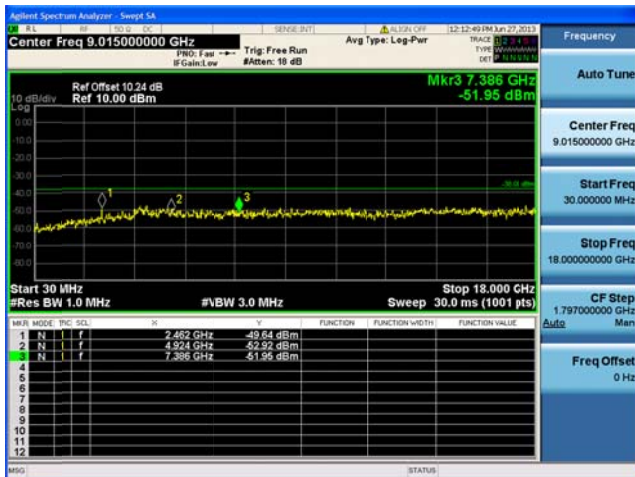


**Antenna C**






**Conducted Spurs Peak, 2462 MHz, HT-20 STBC, M0 to M7**

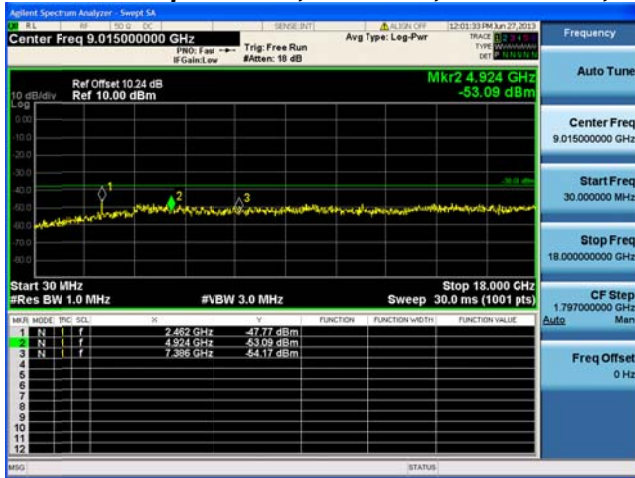


**Antenna A**

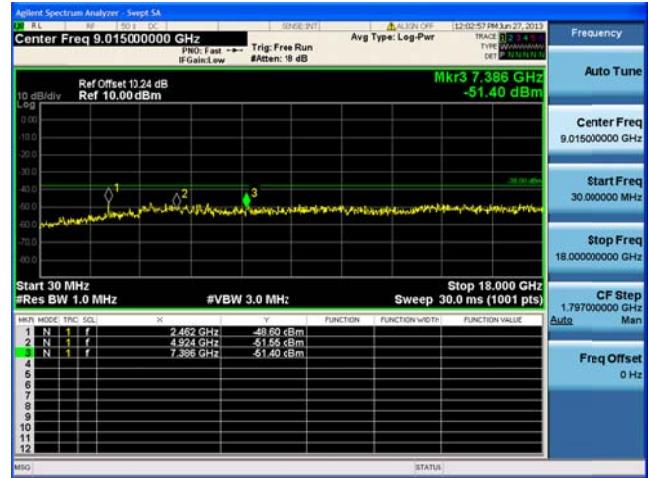


**Antenna B**




**Conducted Spurs Peak, 2462 MHz, HT-20 STBC, M0 to M7**

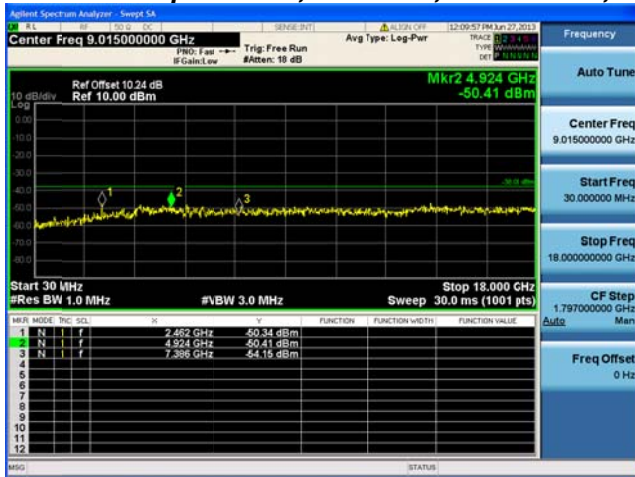

**Antenna A**

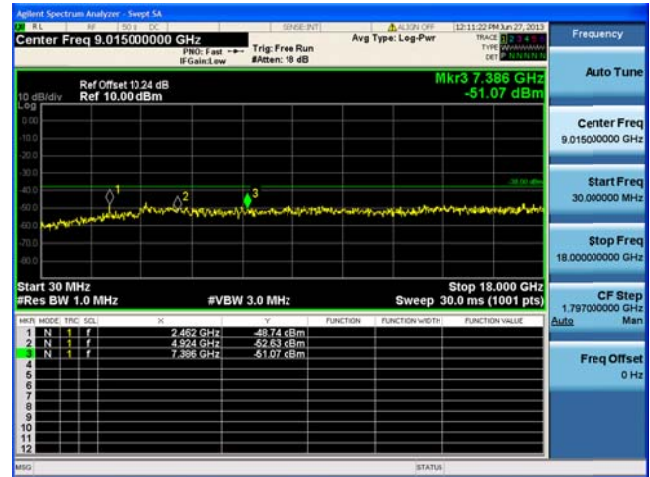

**Antenna B**

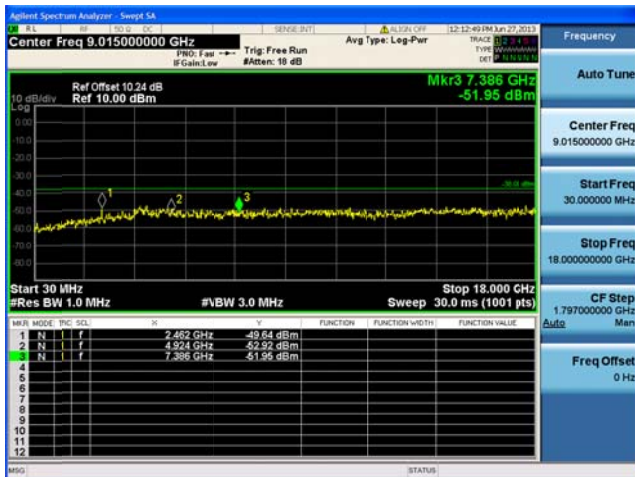

**Antenna C**



## Conducted Bandedge

15.205 / RSS-210 2.7: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use the procedures in 718828 D01 DTS Meas Guidance v01 to substitute conducted measurements in place of radiated measurements.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Be sure to enter all losses between the transmitter output and the spectrum analyzer.

Reference Level:	10 dBm
Attenuation:	4 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 100 Hz for average
Detector:	Peak

Save 2 plots:     1) Average Plot (Vertical and Horizontal), Limit= -41.25 dBm eirp (54dBuV/m @3m)  
                  2) Peak plot (Vertical and Horizontal), Limit = -21.25 dBm eirp (74dBuV/m @3m)

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

This report represents the worst case data for all supported operating modes and antennas.





Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	CCK, 1 to 11 Mbps	1	3	-48.9			-45.9	-41.25	4.7
	CCK, 1 to 11 Mbps	2	3	-48.9	-51.8		-44.1	-41.25	2.9
	CCK, 1 to 11 Mbps	3	3	-51.1	-53.0	-50.1	-43.5	-41.25	2.2
	Non HT-20, 6 to 54 Mbps	1	3	-44.7			-41.7	-41.25	0.5
	Non HT-20, 6 to 54 Mbps	2	3	-48.0	-49.1		-42.5	-41.25	1.3
	Non HT-20, 6 to 54 Mbps	3	3	-51.5	-52.1	-47.6	-42.1	-41.25	0.9
	HT-20, M0 to M7	1	3	-44.4			-41.4	-41.25	0.2
	HT-20, M0 to M7	2	3	-47.6	-48.7		-42.1	-41.25	0.9
	HT-20, M8 to M15	2	3	-47.6	-48.7		-42.1	-41.25	0.9
	HT-20, M0 to M7	3	3	-52.1	-53.7	-47.9	-42.7	-41.25	1.5
	HT-20, M8 to M15	3	3	-52.1	-53.7	-47.9	-42.7	-41.25	1.5
	HT-20, M16 to M23	3	3	-52.1	-53.7	-47.9	-42.7	-41.25	1.5
	HT-20 STBC, M0 to M7	2	3	-47.6	-48.7		-42.1	-41.25	0.9
	HT-20 STBC, M0 to M7	3	3	-52.1	-53.7	-47.9	-42.7	-41.25	1.5
2462	CCK, 1 to 11 Mbps	1	3	-47.9			-44.9	-41.25	3.7
	CCK, 1 to 11 Mbps	2	3	-47.9	-47.8		-41.8	-41.25	0.6
	CCK, 1 to 11 Mbps	3	3	-49.9	-49.7	-48.6	-41.6	-41.25	0.3
	Non HT-20, 6 to 54 Mbps	1	3	-45.5			-42.5	-41.25	1.3
	Non HT-20, 6 to 54 Mbps	2	3	-47.9	-47.0		-41.4	-41.25	0.2
	Non HT-20, 6 to 54 Mbps	3	3	-50.7	-49.7	-48.4	-41.7	-41.25	0.5
	HT-20, M0 to M7	1	3	-45.9			-42.9	-41.25	1.7
	HT-20, M0 to M7	2	3	-48.7	-47.4		-42.0	-41.25	0.7
	HT-20, M8 to M15	2	3	-48.7	-47.4		-42.0	-41.25	0.7
	HT-20, M0 to M7	3	3	-51.7	-51.7	-49.1	-42.9	-41.25	1.6
	HT-20, M8 to M15	3	3	-51.7	-51.7	-49.1	-42.9	-41.25	1.6
	HT-20, M16 to M23	3	3	-51.7	-51.7	-49.1	-42.9	-41.25	1.6
	HT-20 STBC, M0 to M7	2	3	-48.7	-47.4		-42.0	-41.25	0.7
	HT-20 STBC, M0 to M7	3	3	-51.7	-51.7	-49.1	-42.9	-41.25	1.6



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	CCK, 1 to 11 Mbps	1	3	-37.9			-34.9	-21.25	13.7
	CCK, 1 to 11 Mbps	2	3	-37.9	-40.4		-33.0	-21.25	11.7
	CCK, 1 to 11 Mbps	3	3	-39.5	-41.5	-40.0	-32.5	-21.25	11.2
	Non HT-20, 6 to 54 Mbps	1	3	-32.7			-29.7	-21.25	8.5
	Non HT-20, 6 to 54 Mbps	2	3	-34.4	-36.9		-29.5	-21.25	8.2
	Non HT-20, 6 to 54 Mbps	3	3	-37.4	-39.1	-34.3	-28.7	-21.25	7.4
	HT-20, M0 to M7	1	3	-31.5			-28.5	-21.25	7.3
	HT-20, M0 to M7	2	3	-32.6	-36.5		-28.1	-21.25	6.9
	HT-20, M8 to M15	2	3	-32.6	-36.5		-28.1	-21.25	6.9
	HT-20, M0 to M7	3	3	-36.5	-36.7	-33.4	-27.5	-21.25	6.2
	HT-20, M8 to M15	3	3	-36.5	-36.7	-33.4	-27.5	-21.25	6.2
	HT-20, M16 to M23	3	3	-36.5	-36.7	-33.4	-27.5	-21.25	6.2
	HT-20 STBC, M0 to M7	2	3	-32.6	-36.5		-28.1	-21.25	6.9
	HT-20 STBC, M0 to M7	3	3	-36.5	-36.7	-33.4	-27.5	-21.25	6.2
2462	CCK, 1 to 11 Mbps	1	3	-38.0			-35.0	-21.25	13.8
	CCK, 1 to 11 Mbps	2	3	-38.0	-39.9		-32.8	-21.25	11.6
	CCK, 1 to 11 Mbps	3	3	-39.9	-41.1	-38.2	-31.8	-21.25	10.5
	Non HT-20, 6 to 54 Mbps	1	3	-31.1			-28.1	-21.25	6.9
	Non HT-20, 6 to 54 Mbps	2	3	-33.6	-34.5		-28.0	-21.25	6.8
	Non HT-20, 6 to 54 Mbps	3	3	-37.3	-35.2	-35.9	-28.3	-21.25	7.0
	HT-20, M0 to M7	1	3	-30.3			-27.3	-21.25	6.1
	HT-20, M0 to M7	2	3	-33.9	-34.5		-28.2	-21.25	6.9
	HT-20, M8 to M15	2	3	-33.9	-34.5		-28.2	-21.25	6.9
	HT-20, M0 to M7	3	3	-35.1	-38.6	-34.7	-28.0	-21.25	6.8
	HT-20, M8 to M15	3	3	-35.1	-38.6	-34.7	-28.0	-21.25	6.8
	HT-20, M16 to M23	3	3	-35.1	-38.6	-34.7	-28.0	-21.25	6.8
	HT-20 STBC, M0 to M7	2	3	-33.9	-34.5		-28.2	-21.25	6.9
	HT-20 STBC, M0 to M7	3	3	-35.1	-38.6	-34.7	-28.0	-21.25	6.8




**Conducted Bandedge Average, 2412 MHz, CCK, 1 to 11 Mbps**




**Antenna A**

**Conducted Bandedge Average, 2412 MHz, CCK, 1 to 11 Mbps**

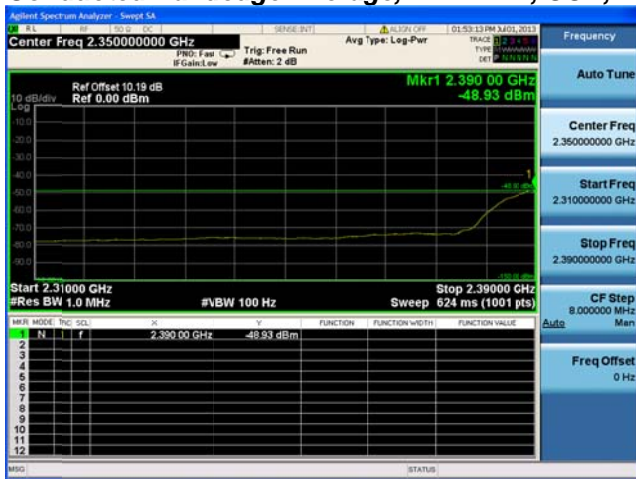


**Antenna A**

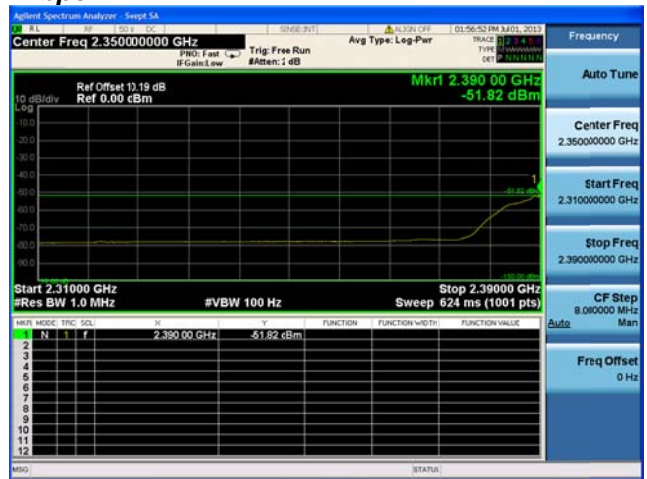


**Antenna B**




Conducted Bandedge Average, 2412 MHz, CCK, 1 to 11 Mbps

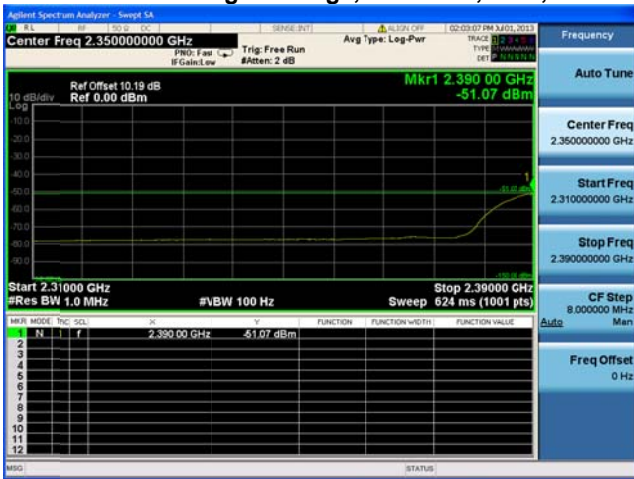

Antenna A

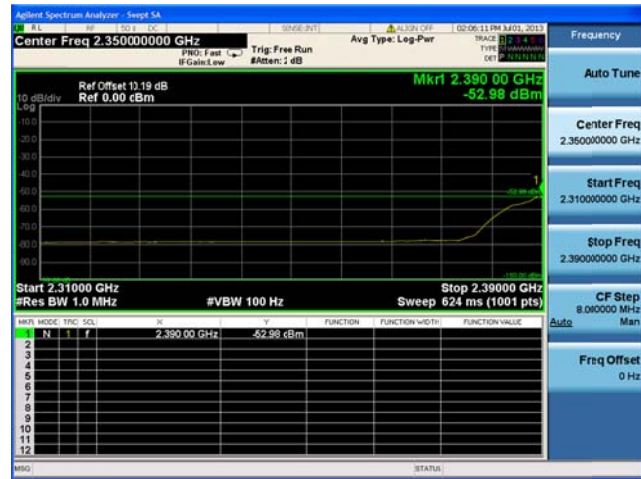

Antenna B

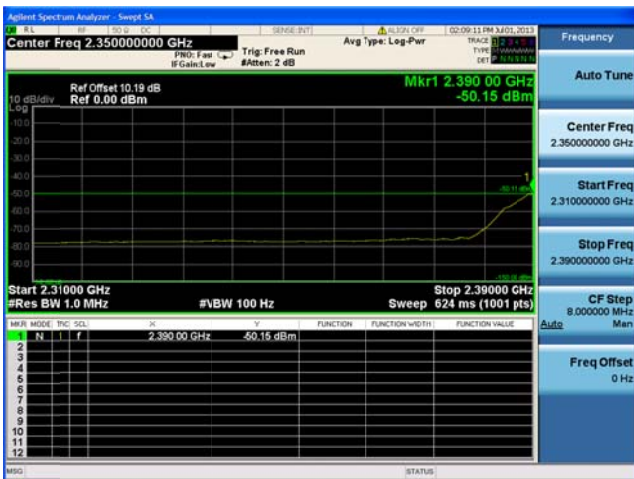

Antenna C




**Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**




**Antenna A**

**Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**

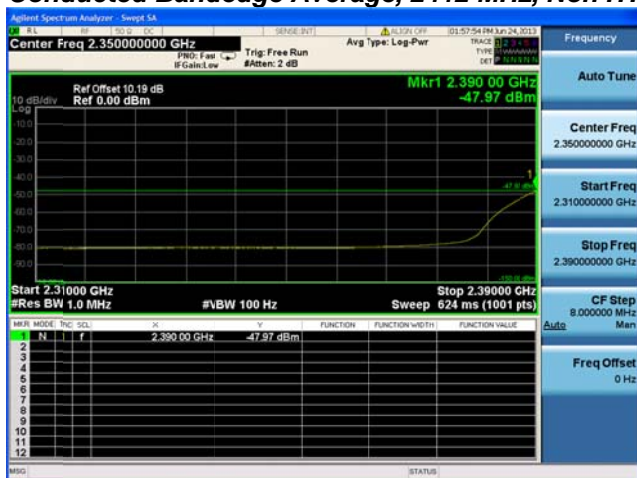

**Antenna A**

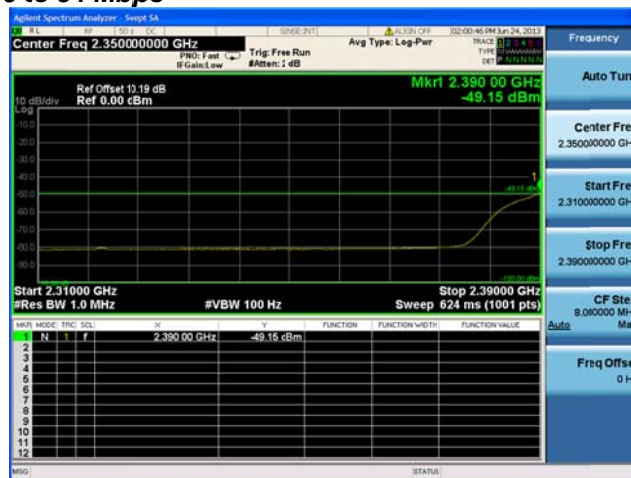


**Antenna B**







Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps

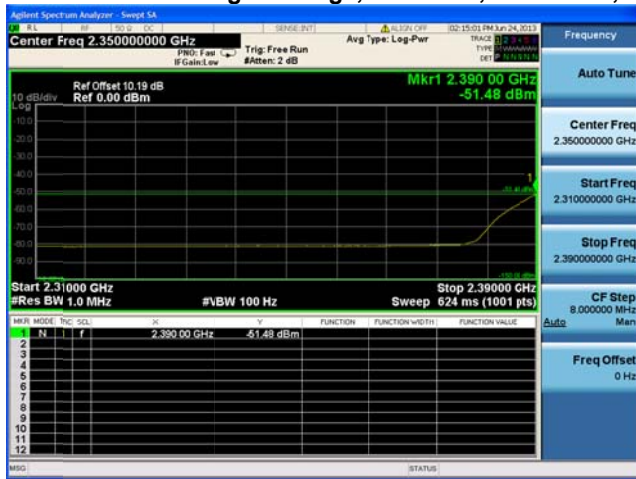

Antenna A

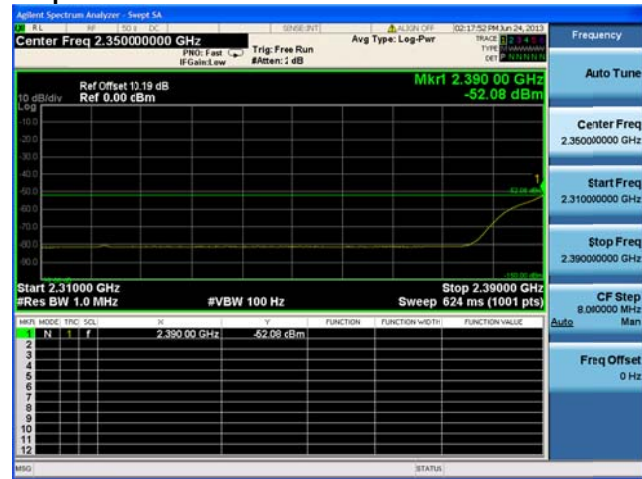


Antenna B

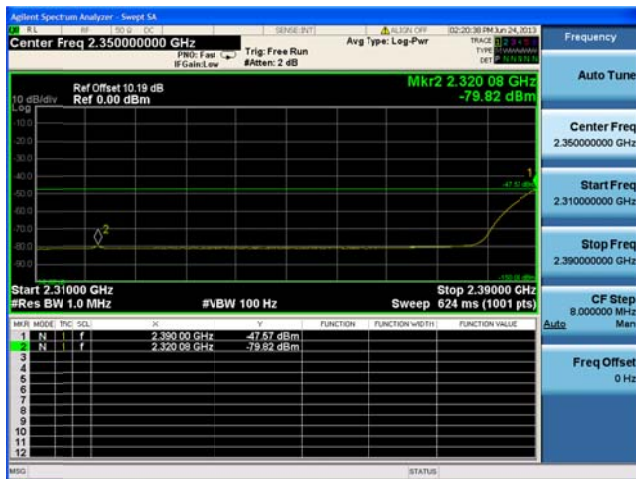

Antenna C




**Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**

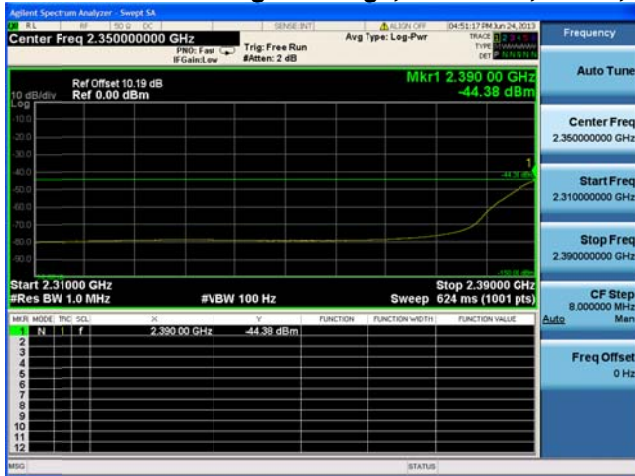


**Antenna A**

**Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**

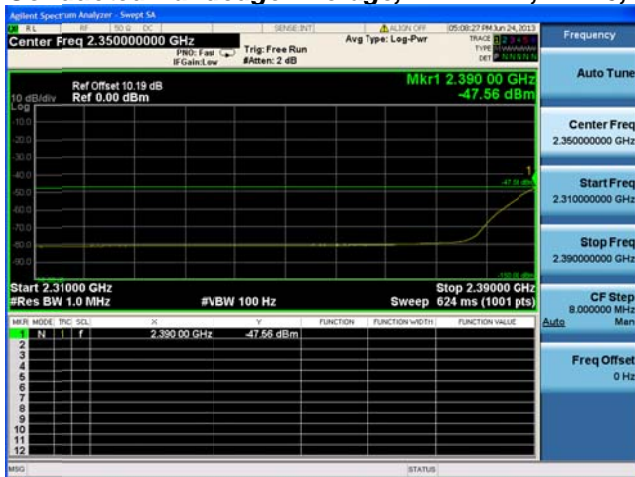


**Antenna A**

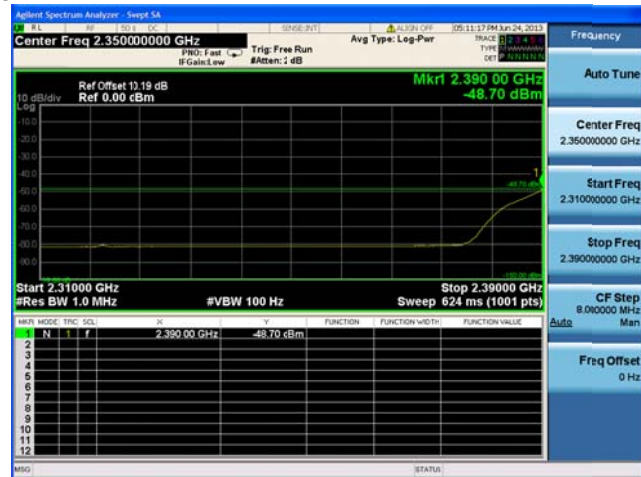


**Antenna B**



**Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15**

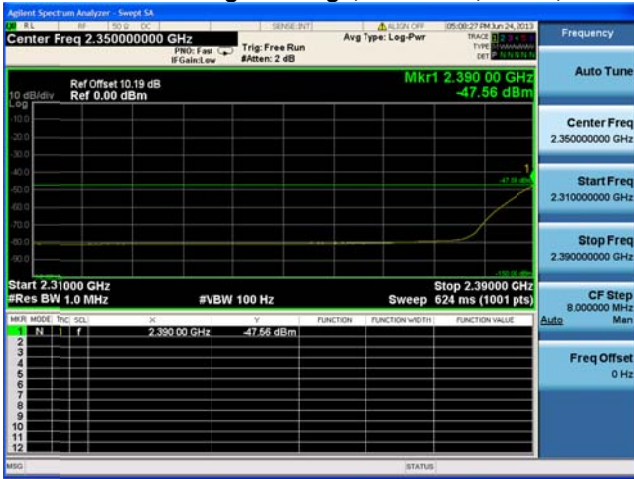


**Antenna A**

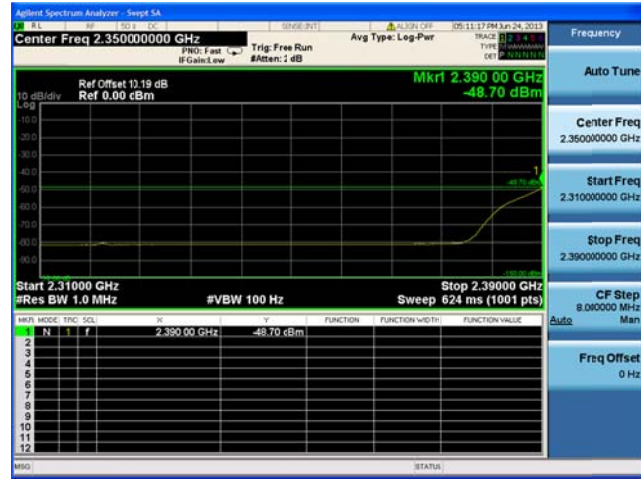


**Antenna B**




**Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**

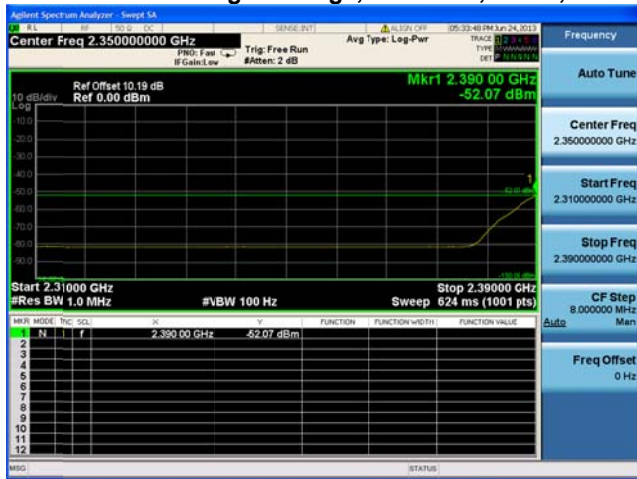

**Antenna A**

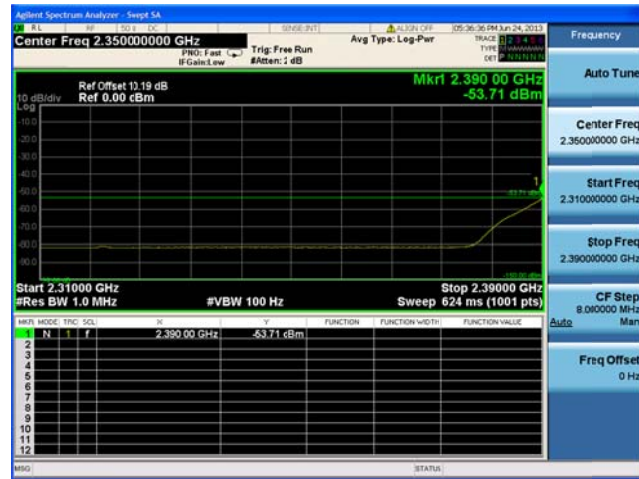


**Antenna B**

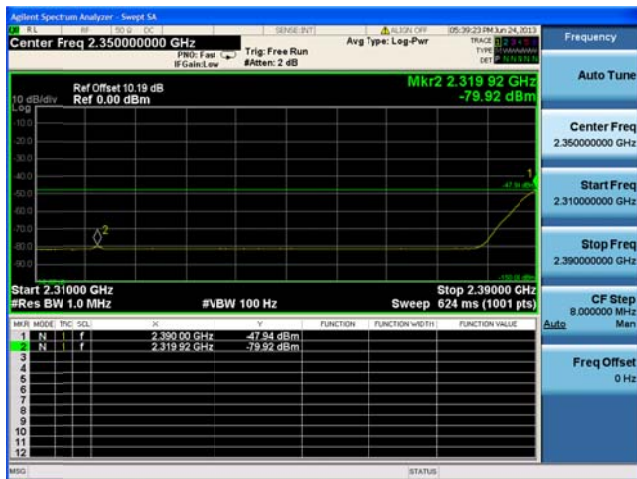


**Antenna C**




**Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15**

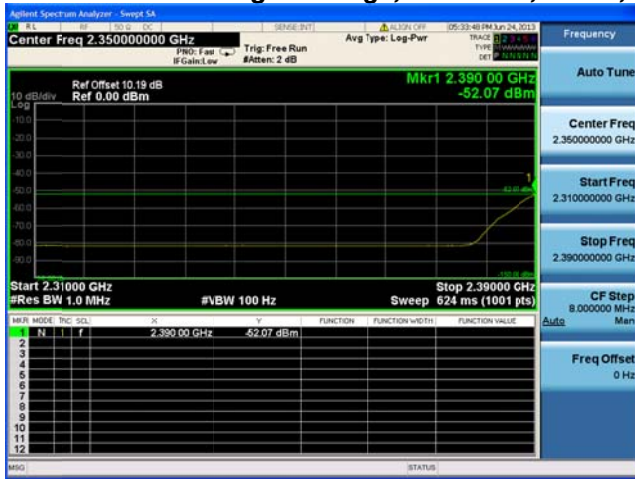

**Antenna A**

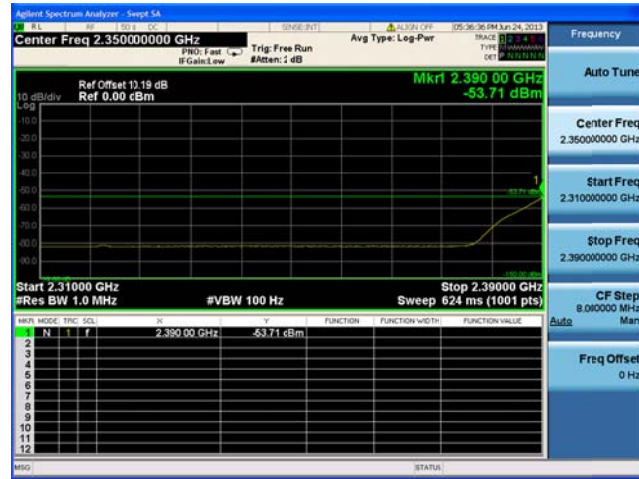

**Antenna B**

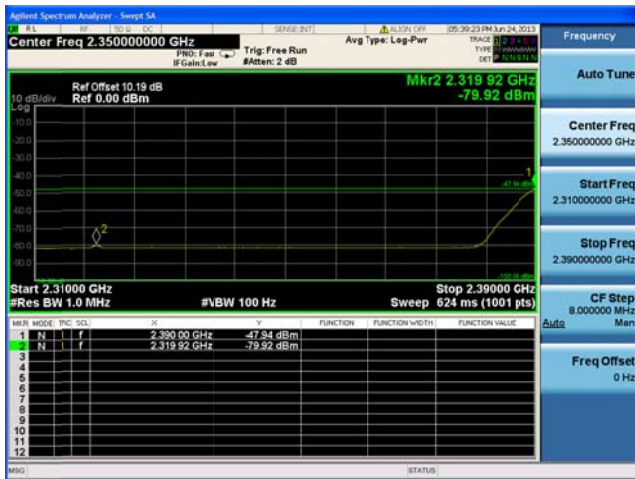


**Antenna C**







**Conducted Bandedge Average, 2412 MHz, HT-20, M16 to M23**

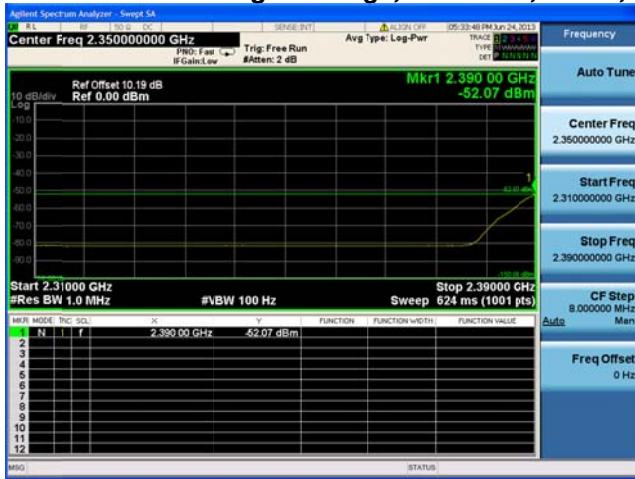

**Antenna A**

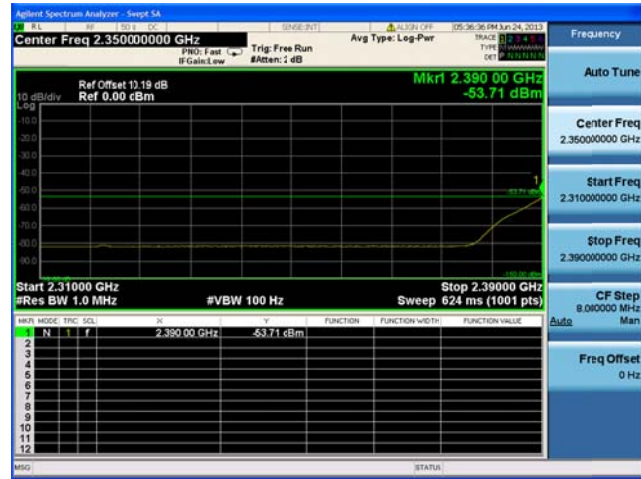

**Antenna B**

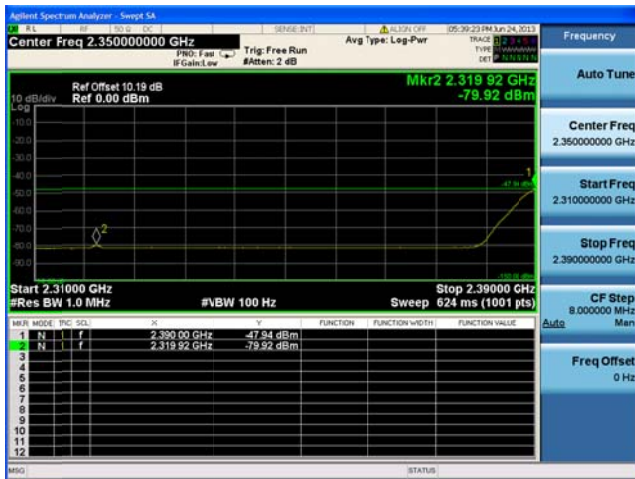


**Antenna C**



**Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7**




**Antenna A**

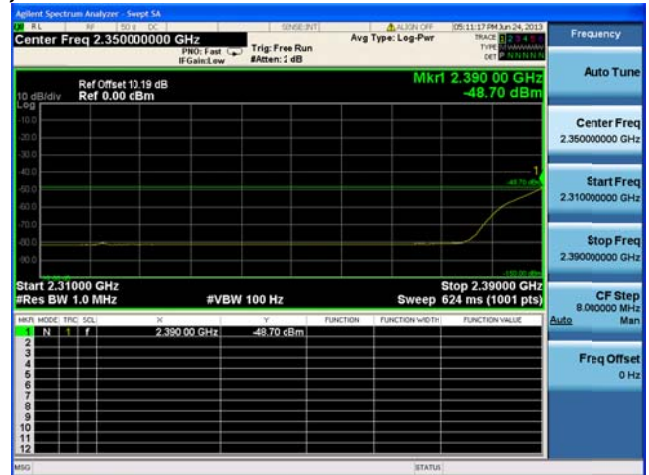


**Antenna B**




Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7

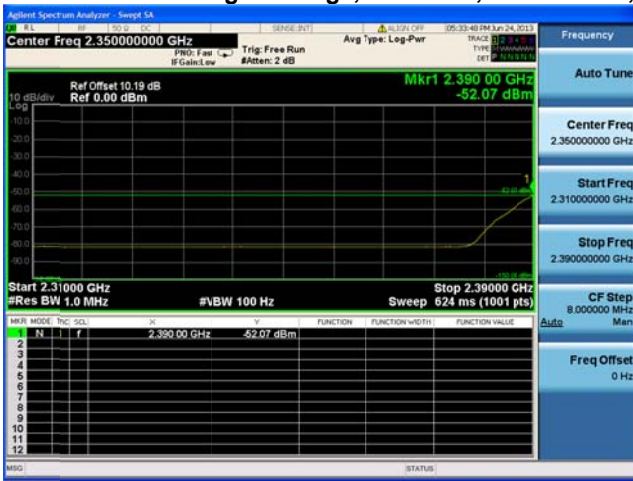

Antenna A

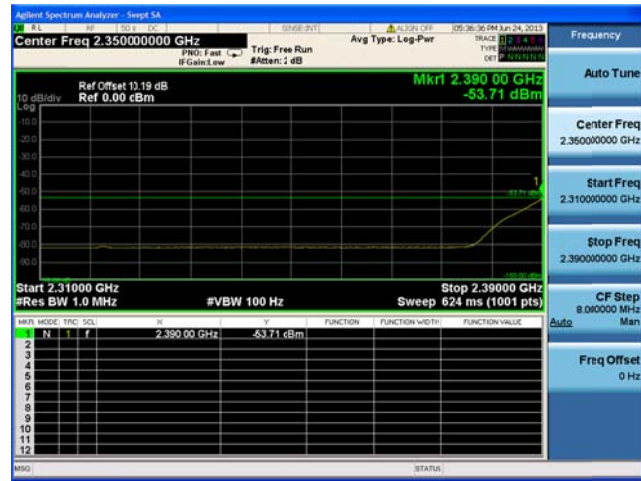

Antenna B

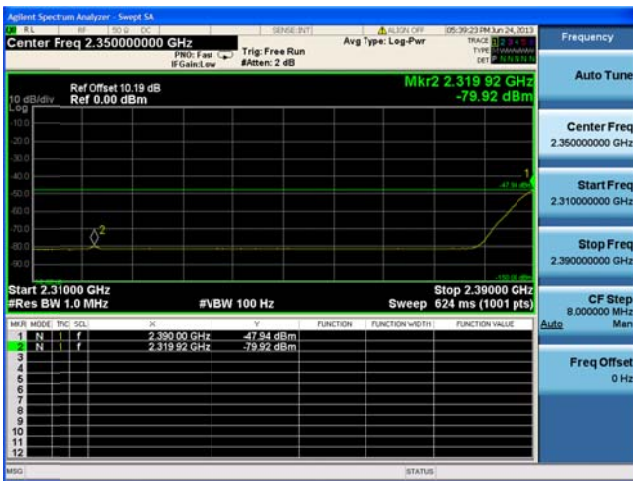

Antenna C



**Conducted Bandedge Average, 2462 MHz, CCK, 1 to 11 Mbps**




**Antenna A**

**Conducted Bandedge Average, 2462 MHz, CCK, 1 to 11 Mbps**



**Antenna A**

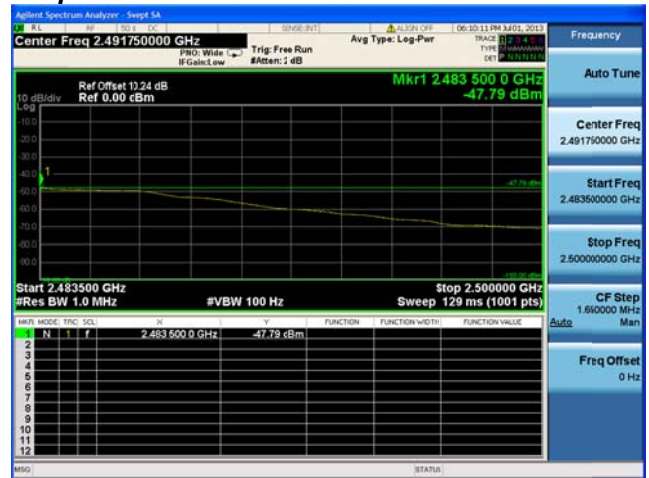


**Antenna B**




Conducted Bandedge Average, 2462 MHz, CCK, 1 to 11 Mbps



Antenna A

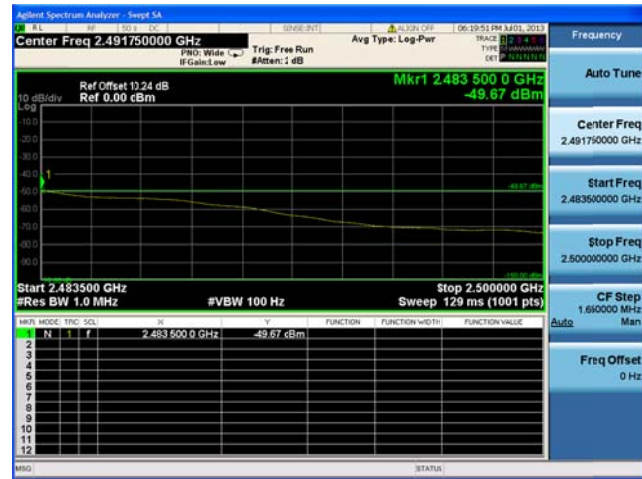

Antenna B

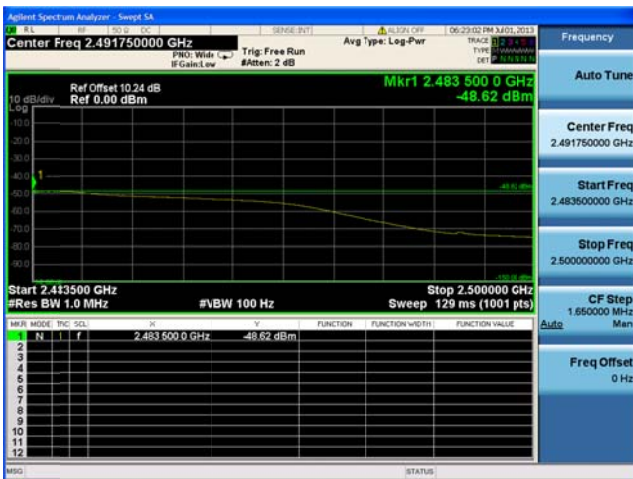

Antenna C





**Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**



**Antenna A**

**Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**



**Antenna A**




**Antenna B**




Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps



Antenna A

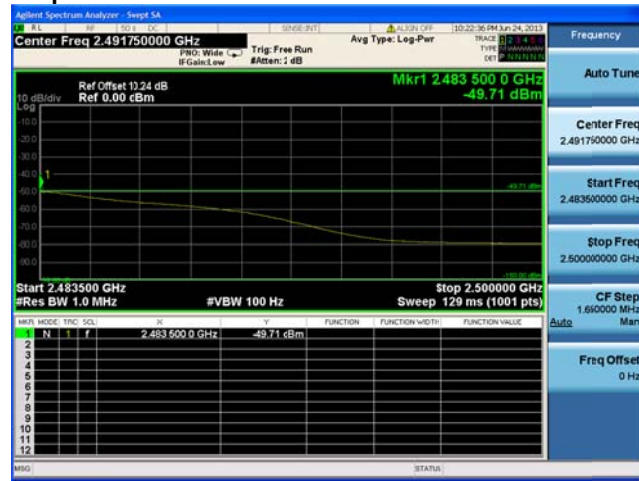

Antenna B

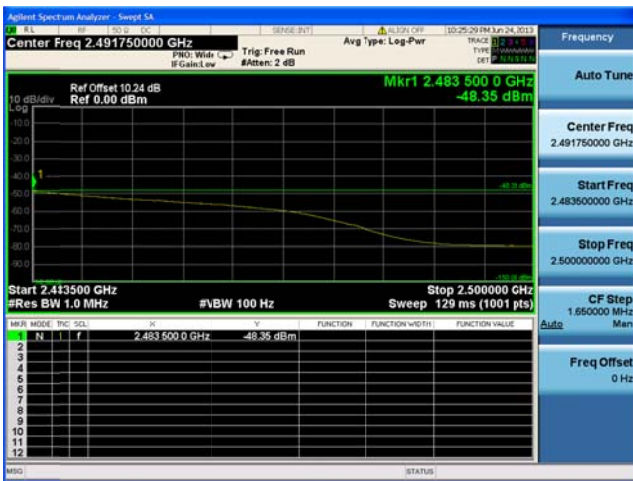

Antenna C



**Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**



**Antenna A**

**Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**



**Antenna A**




**Antenna B**



**Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15**



**Antenna A**

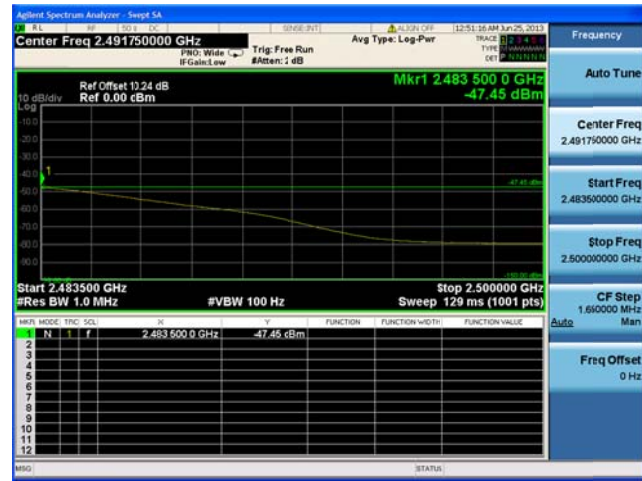


**Antenna B**



Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7



Antenna A

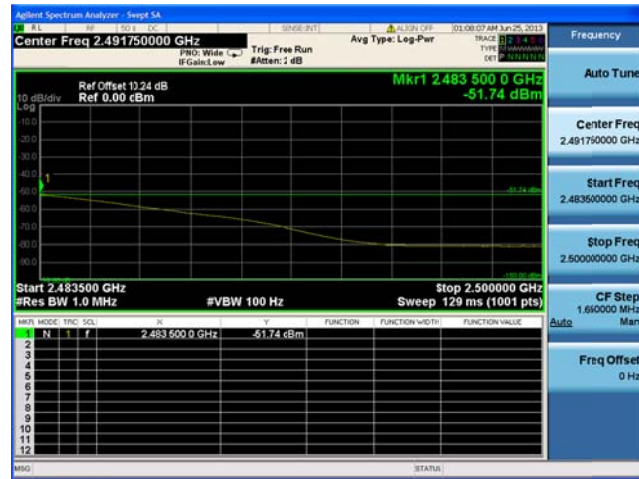

Antenna B



Antenna C






**Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15**



**Antenna A**




**Antenna B**

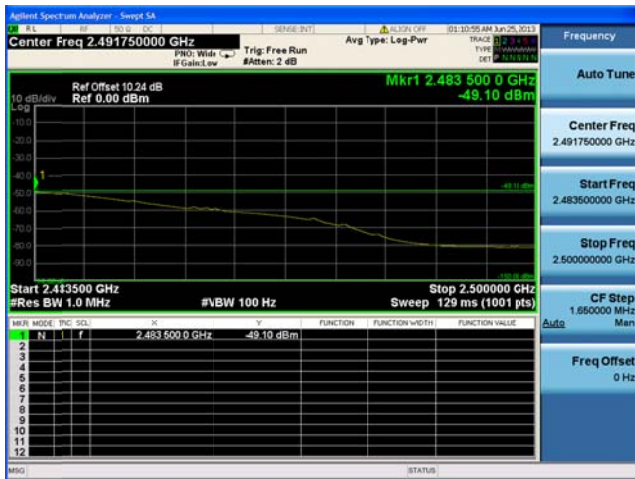


**Antenna C**




**Conducted Bandedge Average, 2462 MHz, HT-20, M16 to M23**

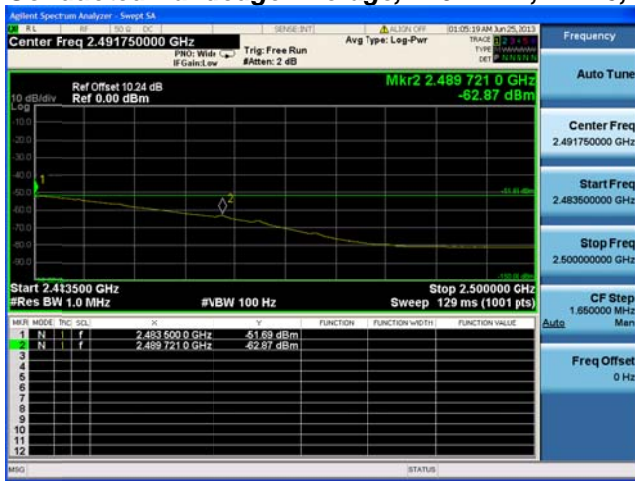

**Antenna A**

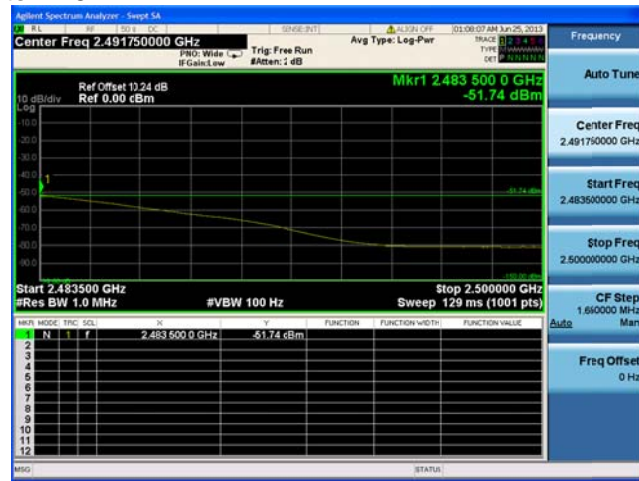

**Antenna B**

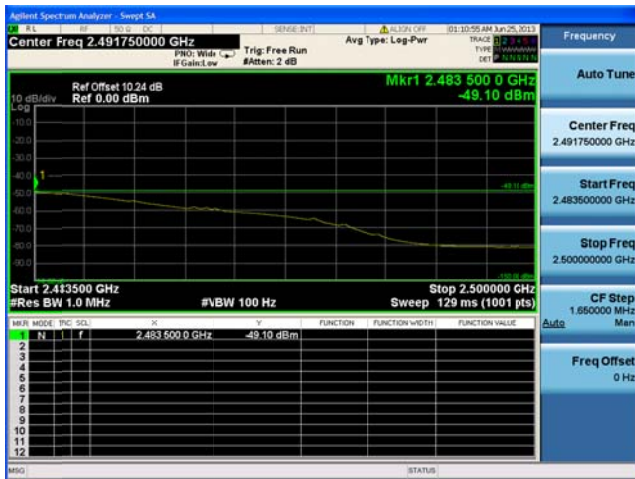


**Antenna C**



**Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7**




**Antenna A**

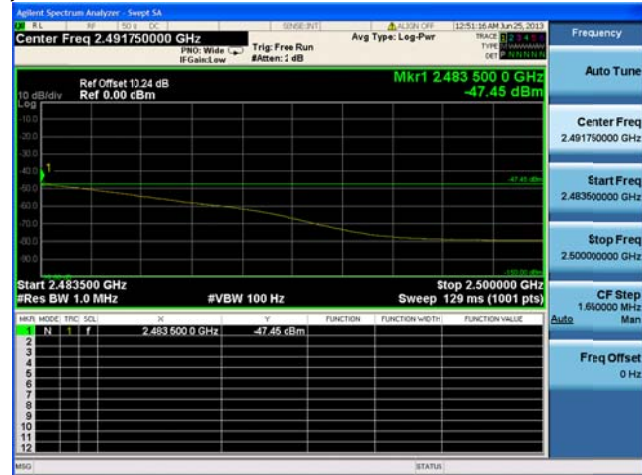

**Antenna B**




Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7

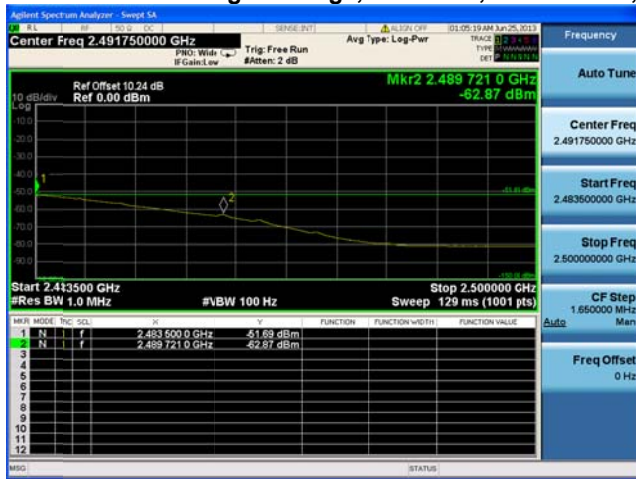

Antenna A



Antenna B

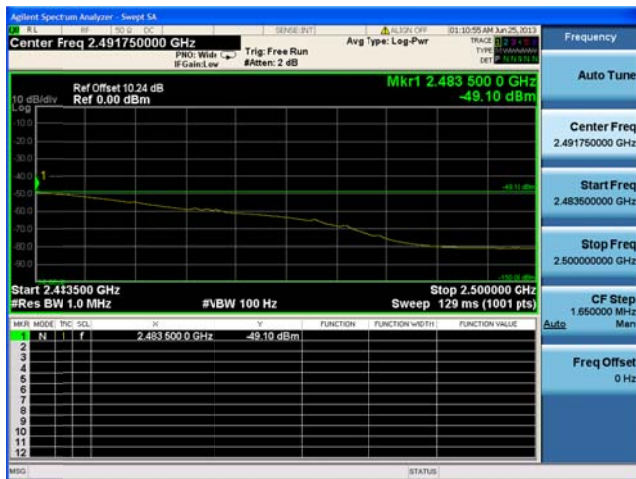

Antenna C



**Conducted Bandedge Peak, 2412 MHz, CCK, 1 to 11 Mbps**




**Antenna A**

**Conducted Bandedge Peak, 2412 MHz, CCK, 1 to 11 Mbps**



**Antenna A**

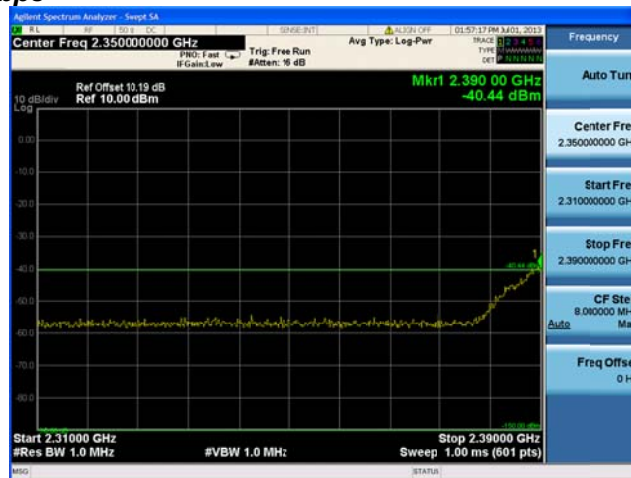


**Antenna B**







**Conducted Bandedge Peak, 2412 MHz, CCK, 1 to 11 Mbps**

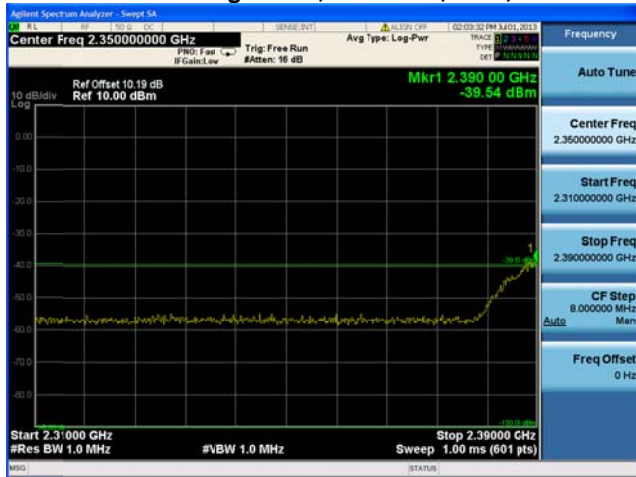

**Antenna A**

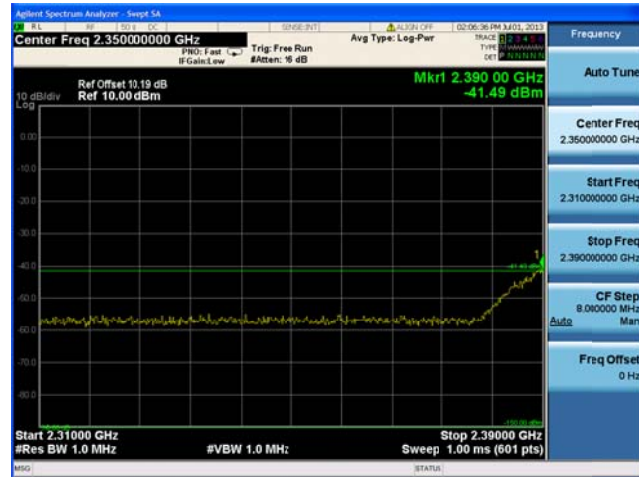

**Antenna B**

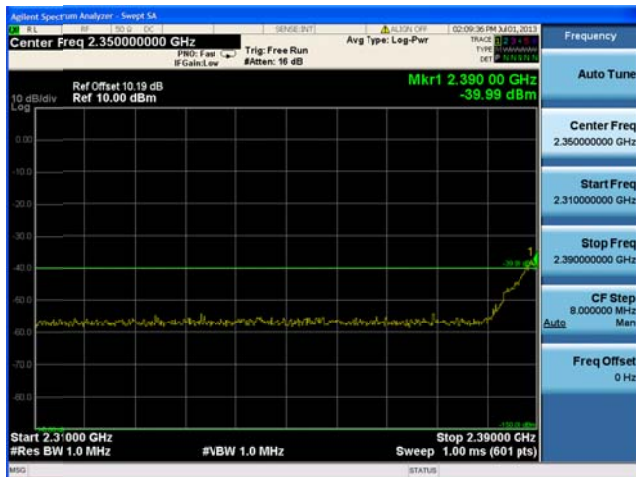

**Antenna C**



**Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**




**Antenna A**

**Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**



**Antenna A**

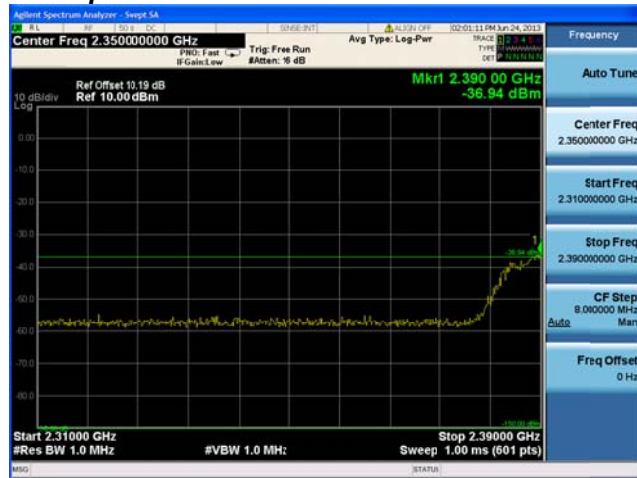


**Antenna B**




**Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**



**Antenna A**

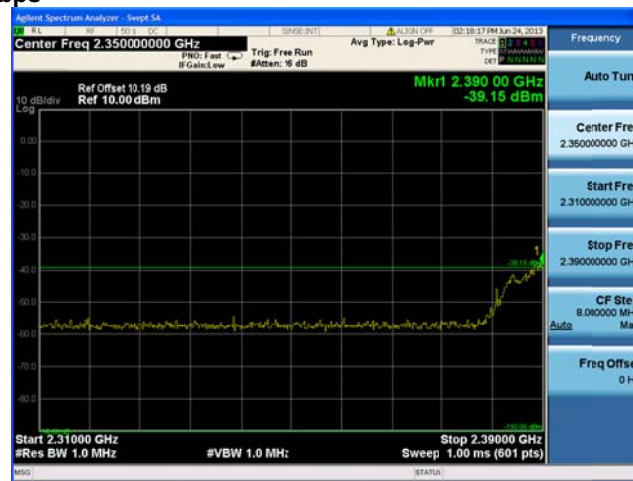

**Antenna B**

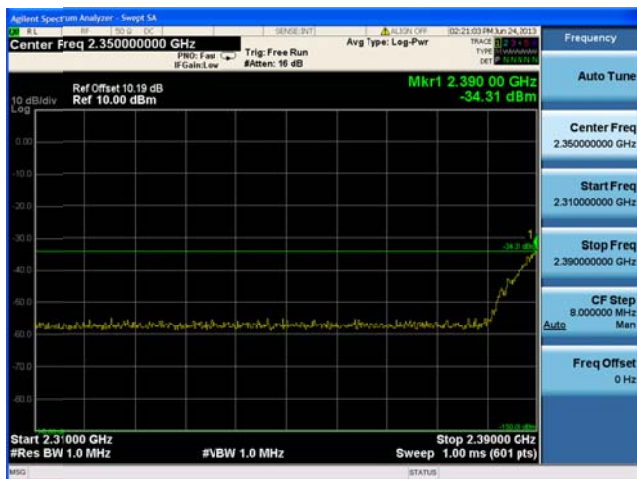

**Antenna C**



**Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**




**Antenna A**

**Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**



**Antenna A**

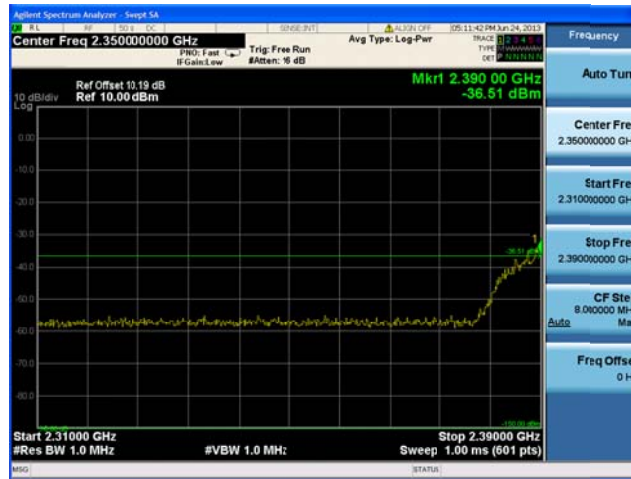


**Antenna B**



**Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**



**Antenna A**

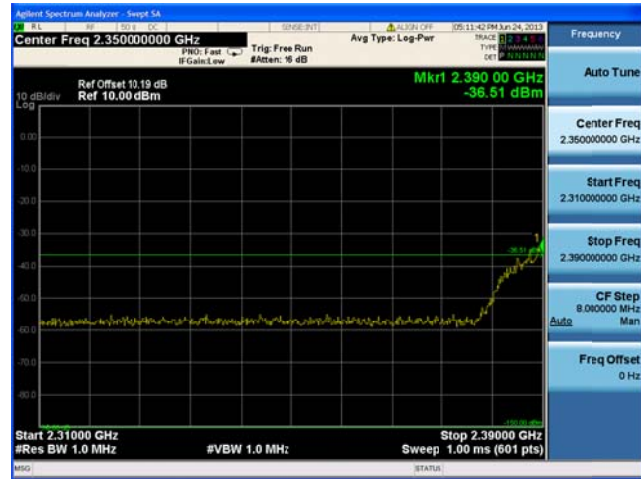


**Antenna B**







**Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**

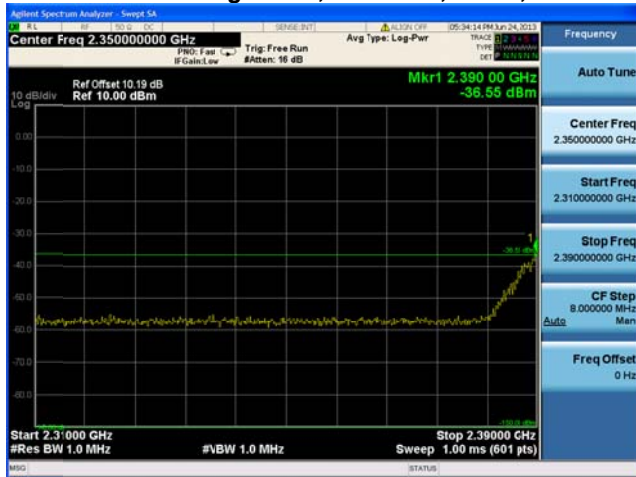

**Antenna A**

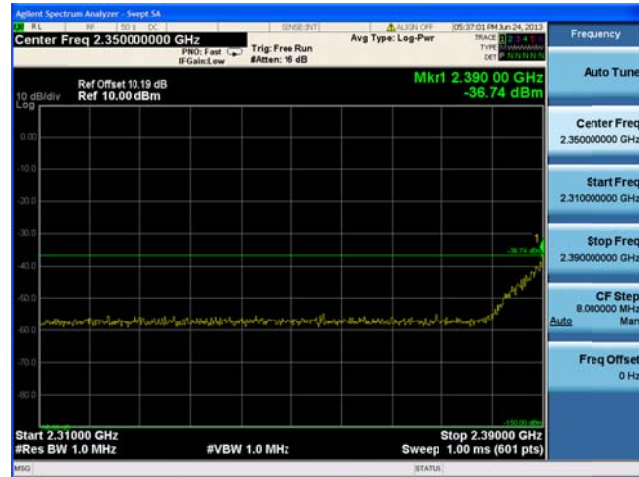


**Antenna B**

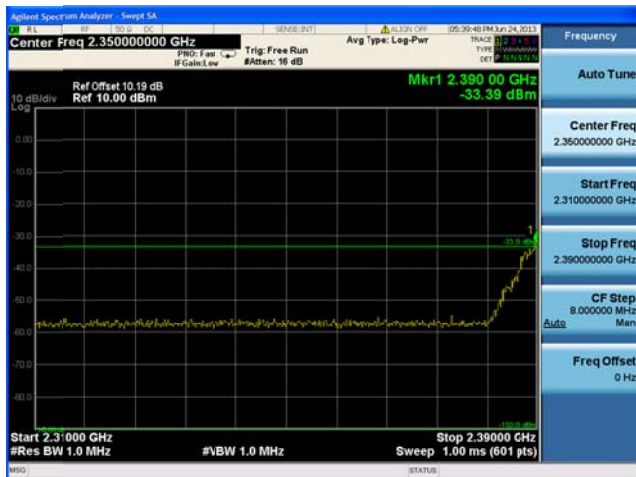


**Antenna C**




**Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**

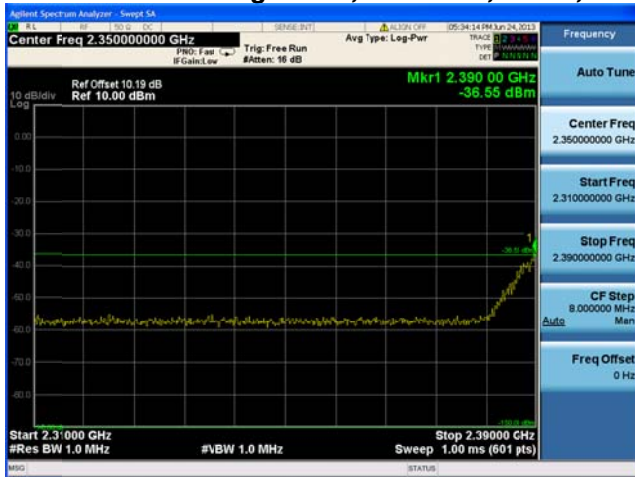

**Antenna A**

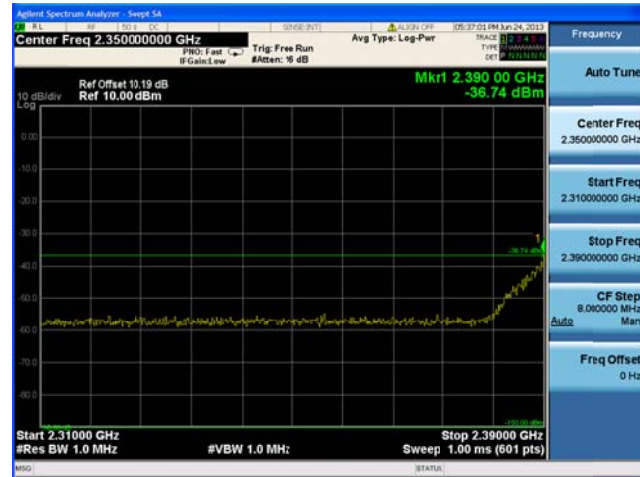


**Antenna B**

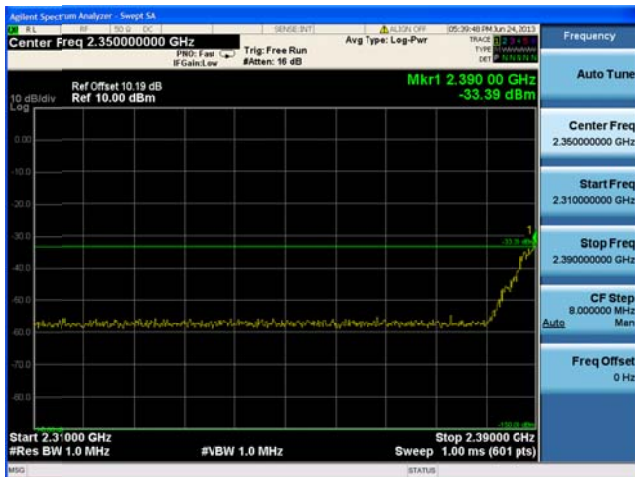


**Antenna C**




**Conducted Bandedge Peak, 2412 MHz, HT-20, M16 to M23**

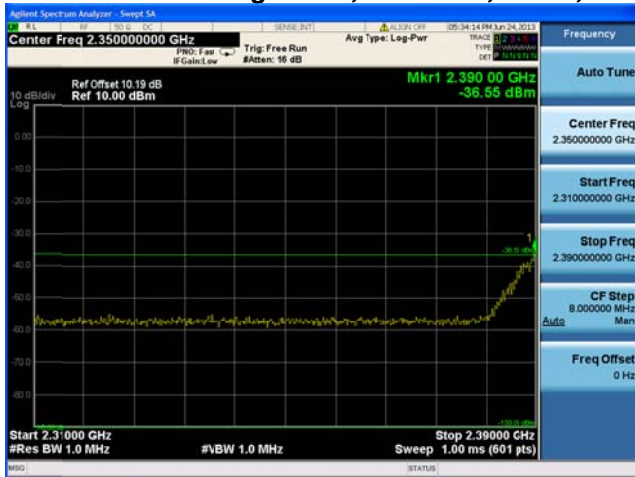

**Antenna A**

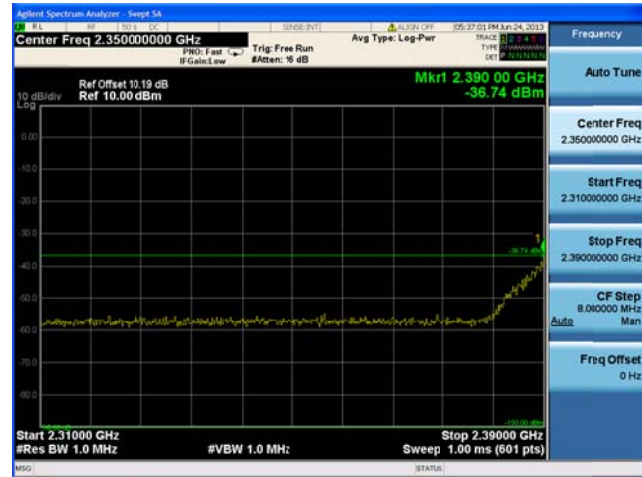

**Antenna B**

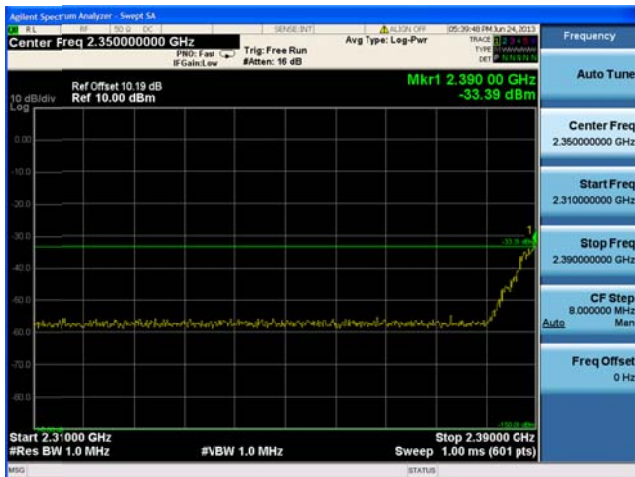


**Antenna C**



**Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**




**Antenna A**

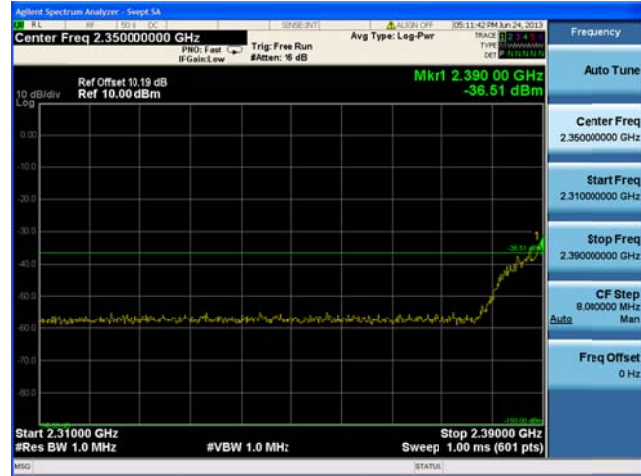


**Antenna B**




**Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**

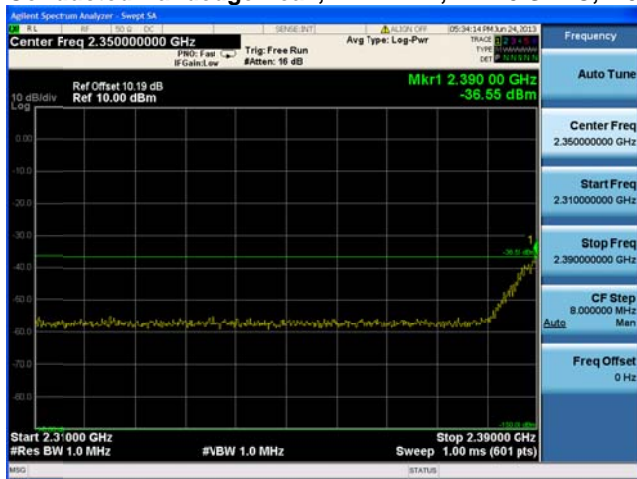

**Antenna A**

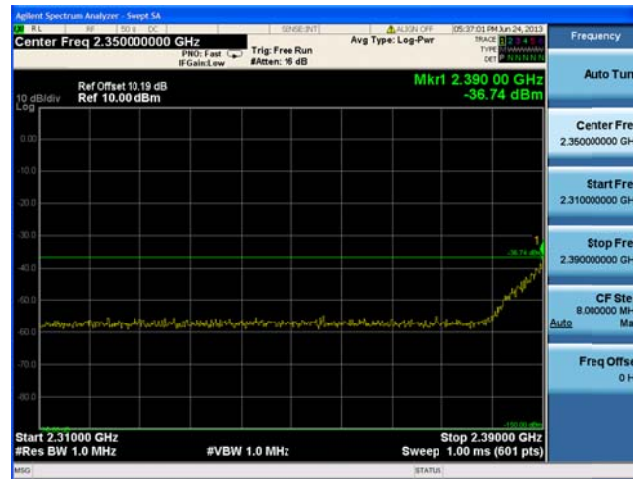

**Antenna B**

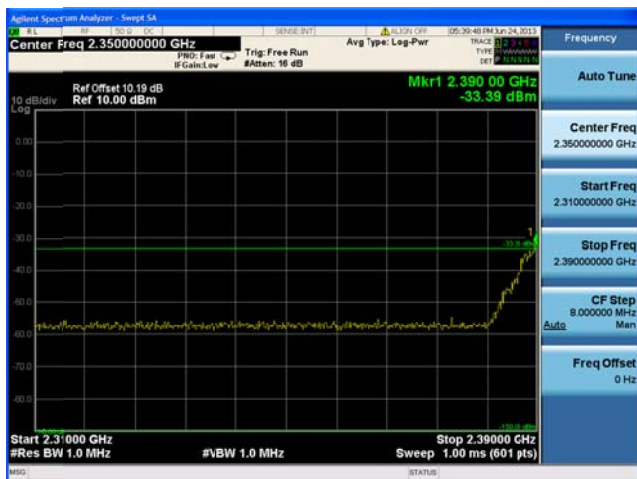


**Antenna C**





**Conducted Bandedge Peak, 2462 MHz, CCK, 1 to 11 Mbps**

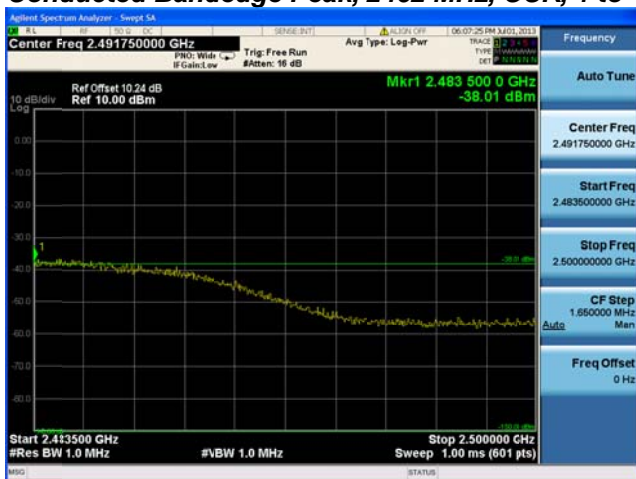


**Antenna A**

**Conducted Bandedge Peak, 2462 MHz, CCK, 1 to 11 Mbps**




**Antenna A**

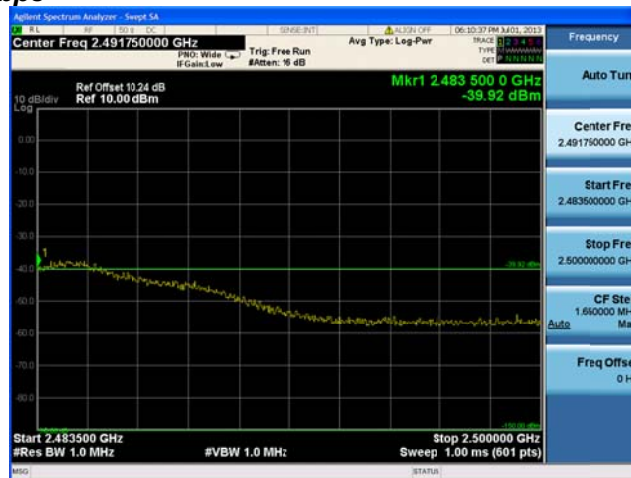

**Antenna B**




**Conducted Bandedge Peak, 2462 MHz, CCK, 1 to 11 Mbps**

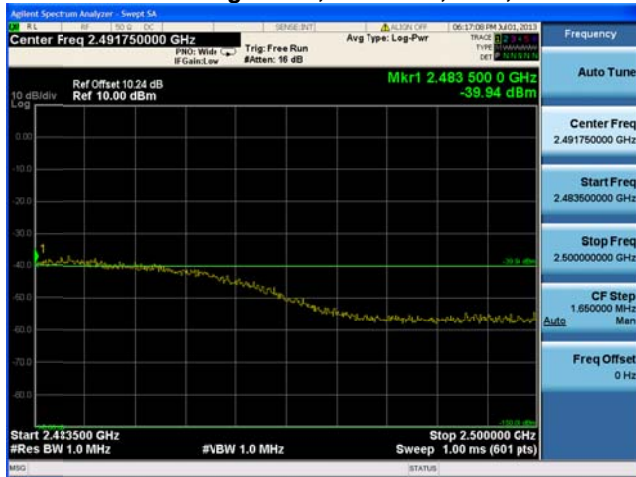

**Antenna A**




**Antenna B**

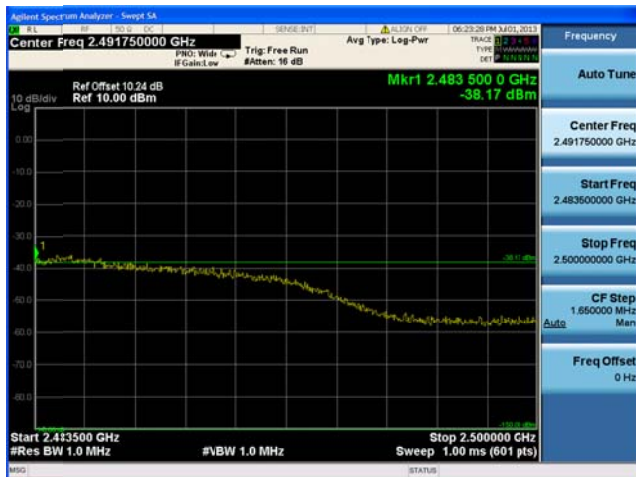

**Antenna C**




**Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**

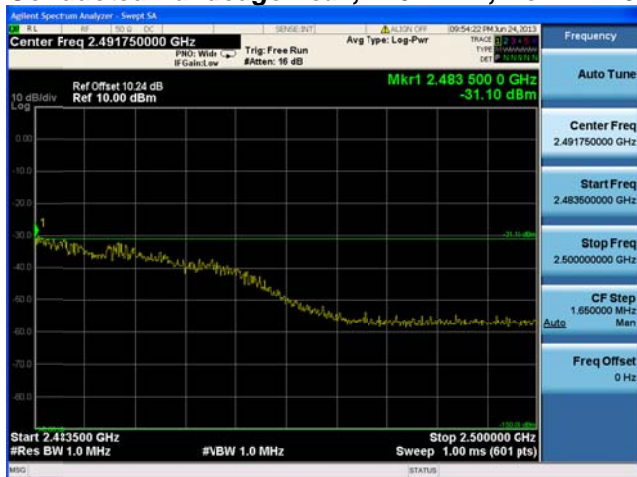


**Antenna A**

**Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**

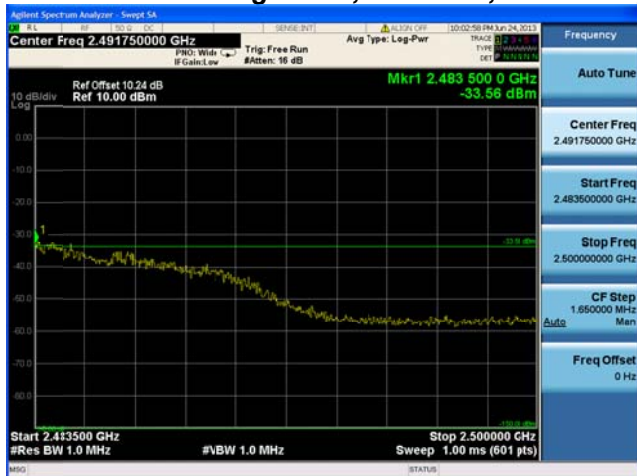

**Antenna A**

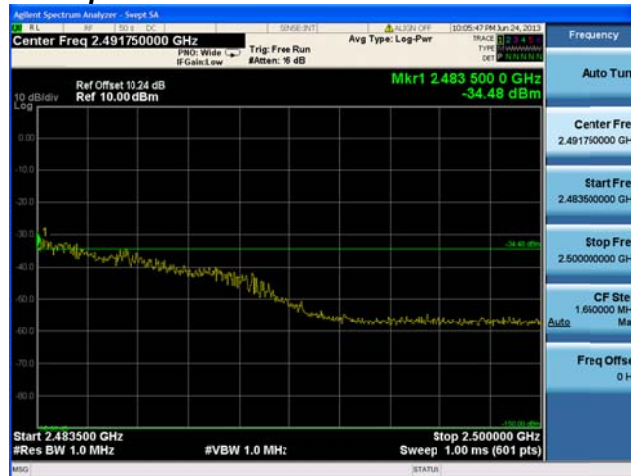


**Antenna B**




**Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**



**Antenna A**

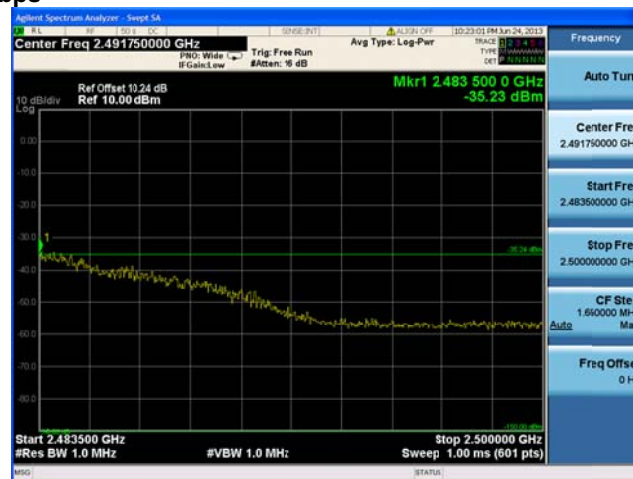

**Antenna B**

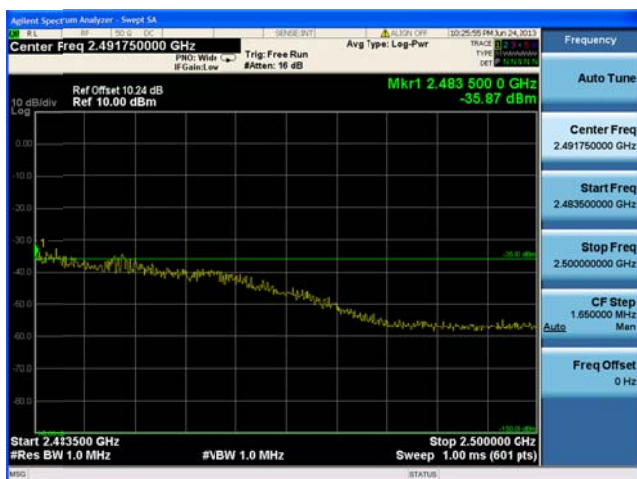

**Antenna C**




**Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**




**Antenna A**

**Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**

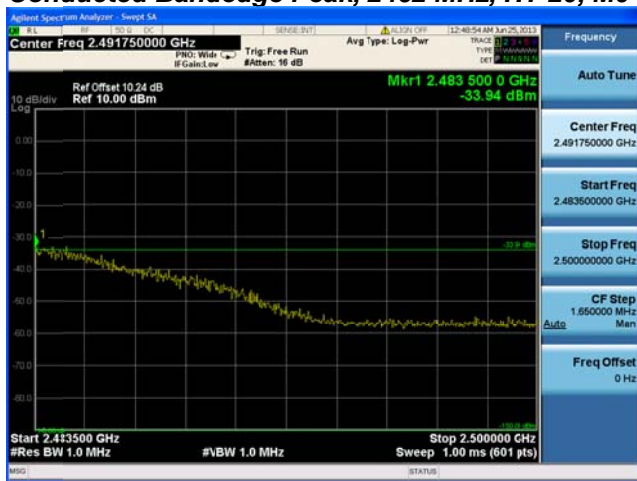

**Antenna A**

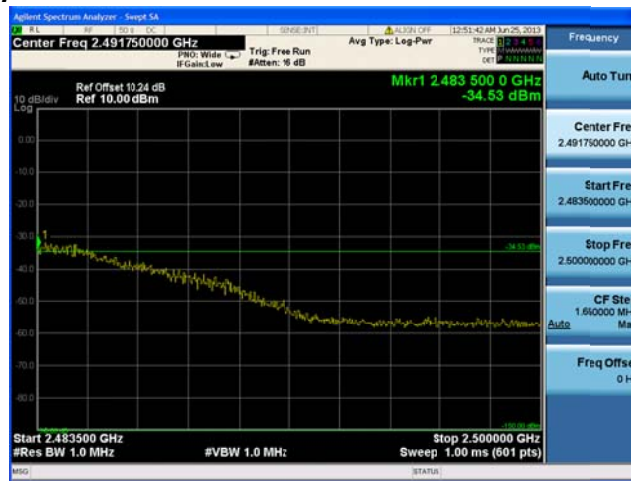


**Antenna B**






**Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15**

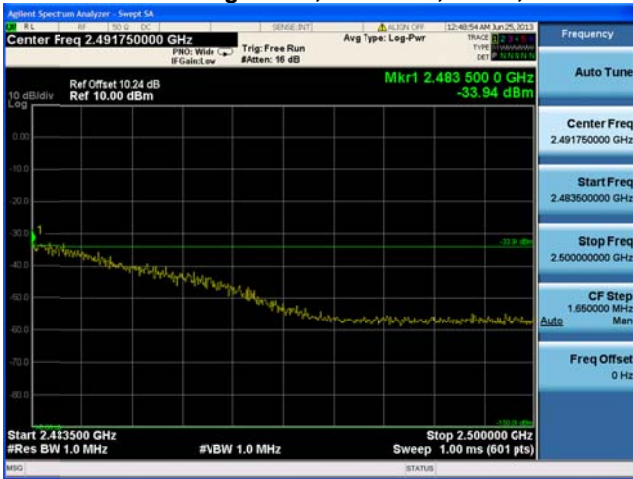

**Antenna A**

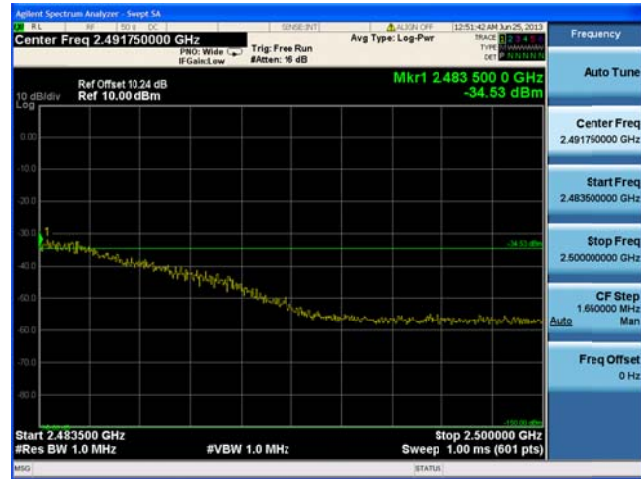


**Antenna B**




**Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**



**Antenna A**

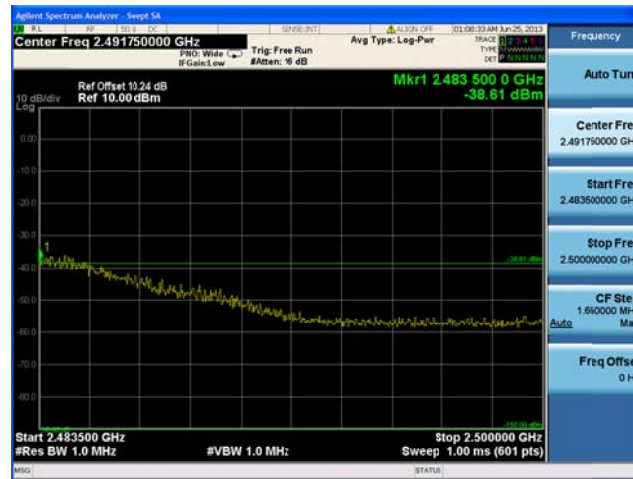

**Antenna B**

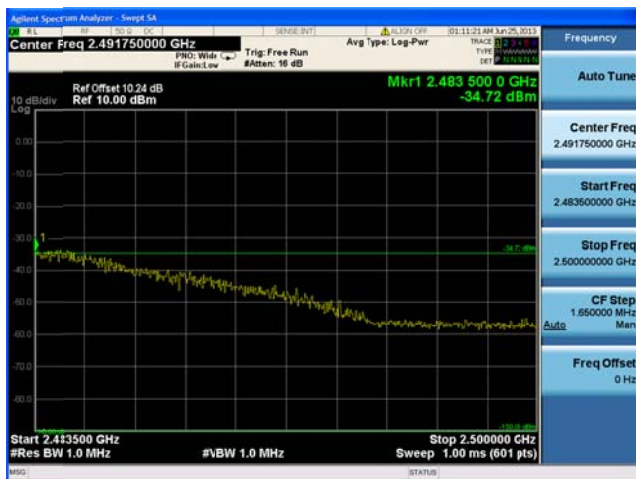


**Antenna C**



**Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15**



**Antenna A**

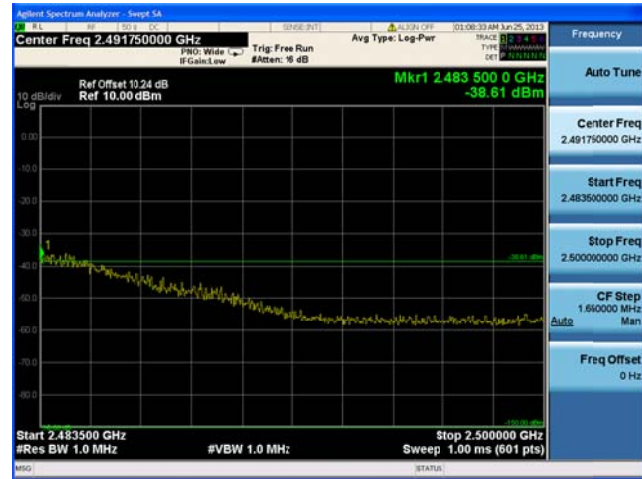


**Antenna B**




**Antenna C**




**Conducted Bandedge Peak, 2462 MHz, HT-20, M16 to M23**

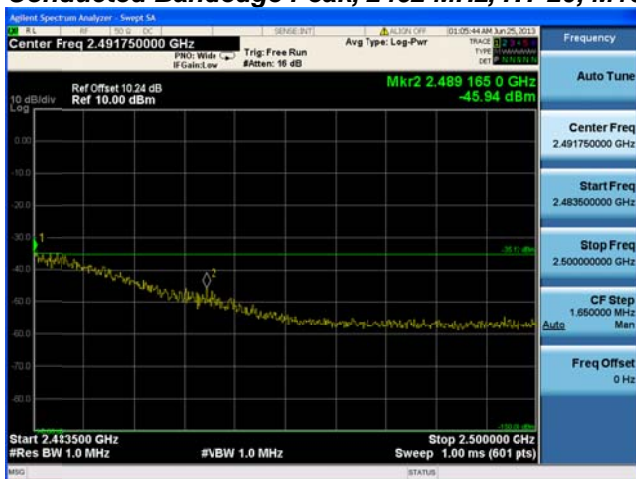

**Antenna A**

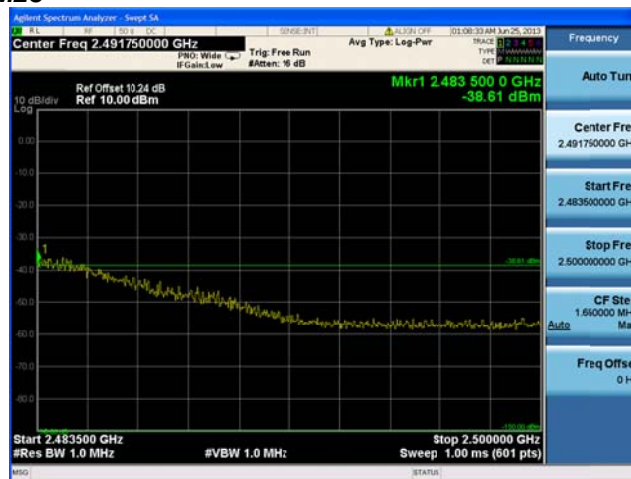


**Antenna B**

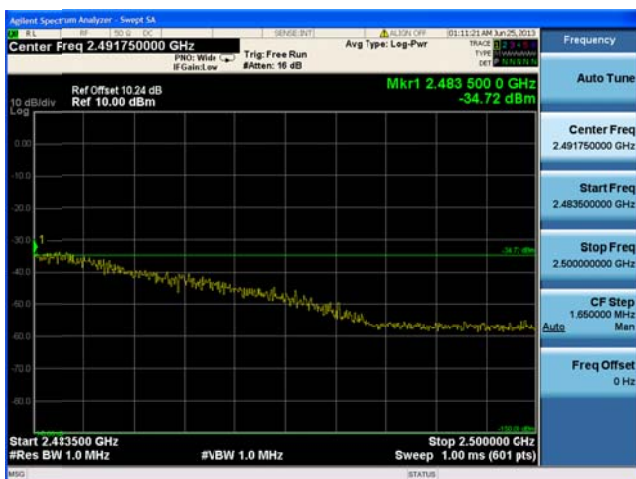


**Antenna C**



**Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**

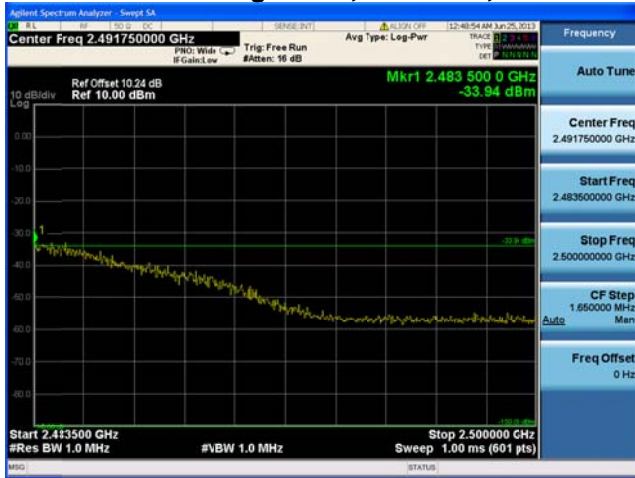

**Antenna A**

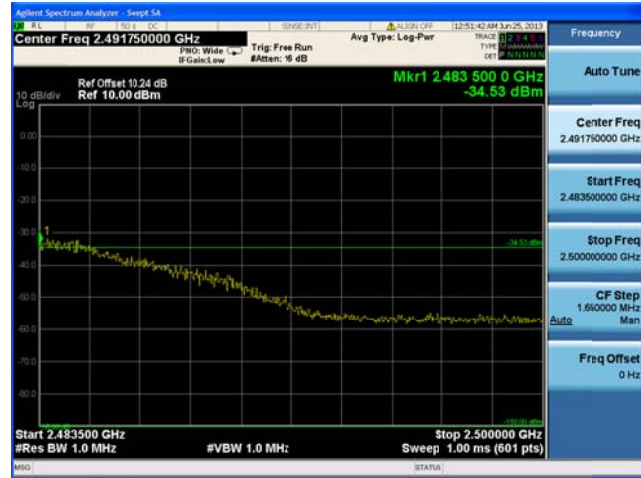

**Antenna B**







**Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**



**Antenna A**

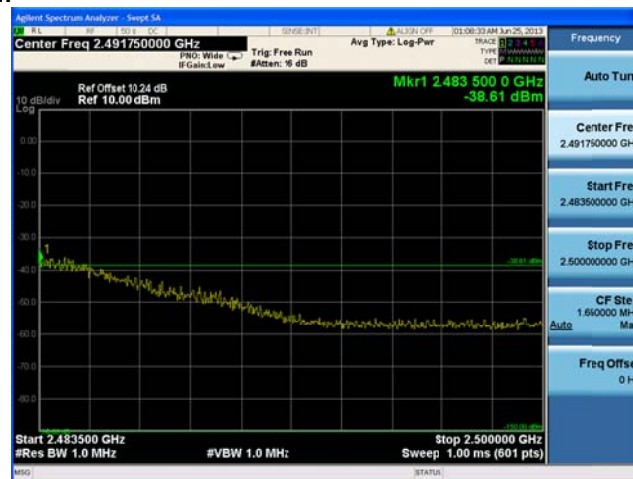

**Antenna B**

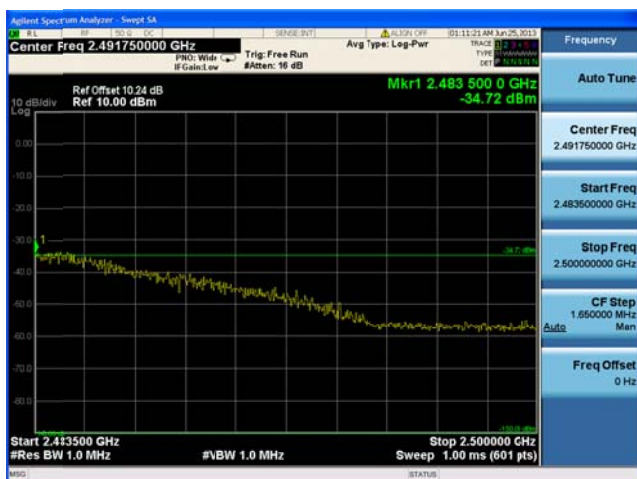

**Antenna C**



## **Appendix B: Emission Test Results**

**Testing Laboratory:** Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

### **Radiated Spurious Emissions**

15.205 / RSS-210 2.7: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 10 Hz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots:     1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m  
                  2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.


This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.



Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	50.7	<54	3.3
	Non HT-20, 6 to 54 Mbps	6	50.7	<54	3.3
	HT-20, M0 to M23	m0	50.7	<54	3.3
	HT-20 STBC, M0 to M7	m0	50.7	<54	3.3
2437	Legacy CCK, 1 to 11 Mbps	1	50.8	<54	3.2
	Non HT-20, 6 to 54 Mbps	6	50.8	<54	3.2
	HT-20, M0 to M23	m0	50.8	<54	3.2
	HT-20 STBC, M0 to M7	m0	50.8	<54	3.2
2462	Legacy CCK, 1 to 11 Mbps	1	50.7	<54	3.3
	Non HT-20, 6 to 54 Mbps	6	50.7	<54	3.3
	HT-20, M0 to M23	m0	50.7	<54	3.3
	HT-20 STBC, M0 to M7	m0	50.7	<54	3.3



**Radiated Spurs, 2412 MHz, All Rates, All Modes, Average**

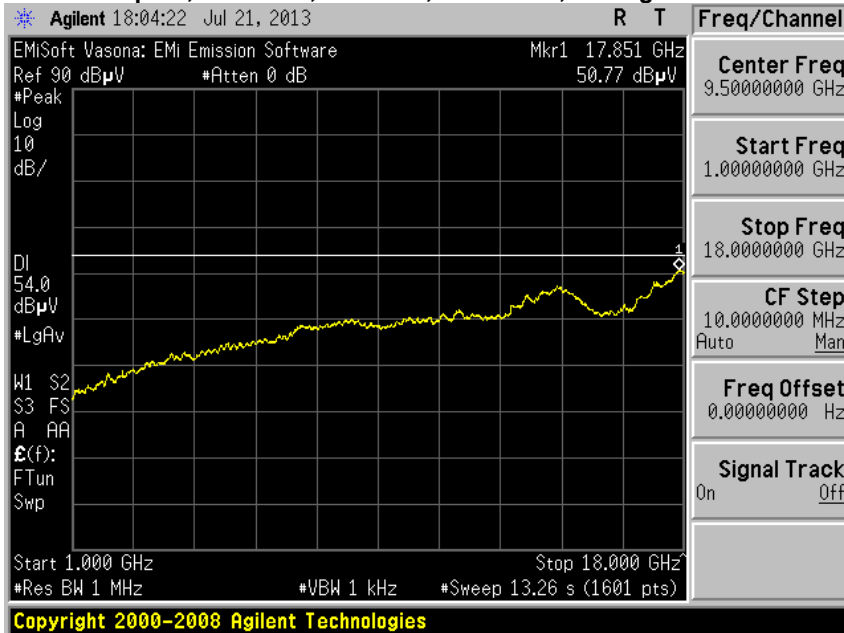

**Radiated Spurs, 2442 MHz, All Rates, All Modes, Average**






**Radiated Spurs, 2462 MHz, All Rates, All Modes, Average**




**Radiated Spurs, 2412 MHz, All Rates, All Modes, Peak**

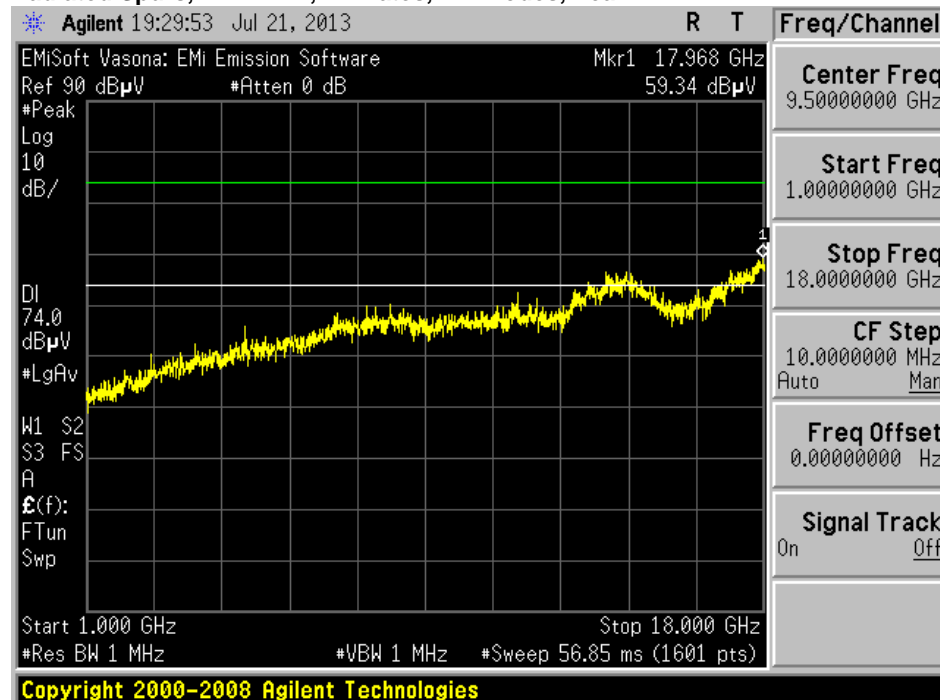






**Radiated Spurs, 2442 MHz, All Rates, All Modes, Peak**

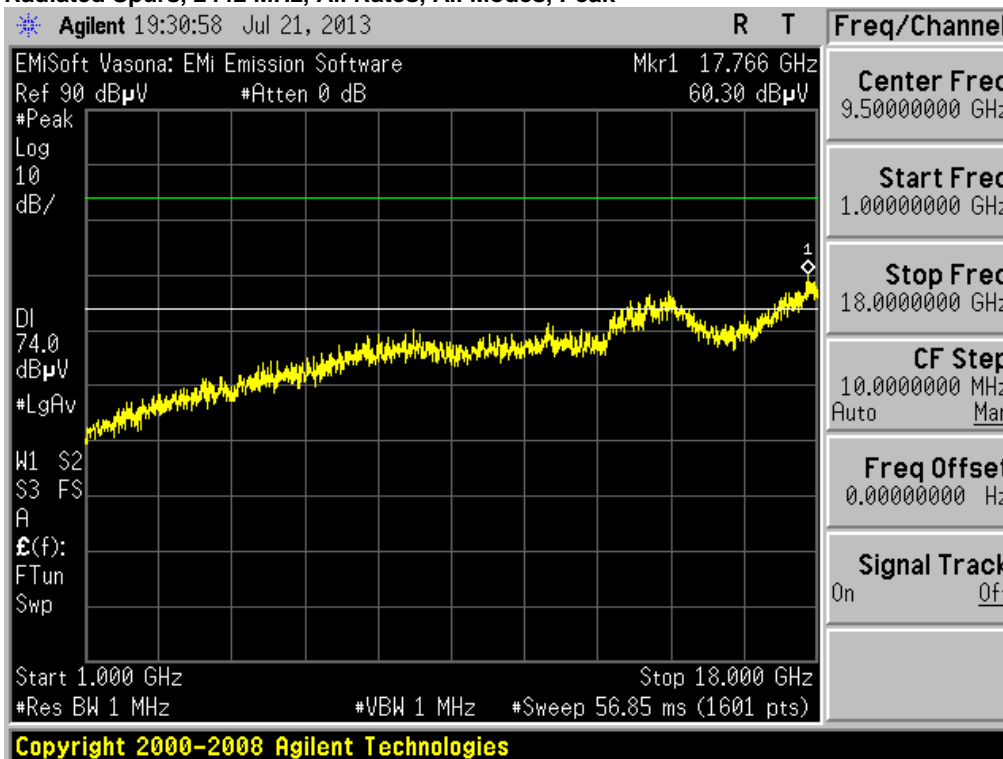


**Radiated Spurs, 2462 MHz, All Rates, All Modes, Peak**

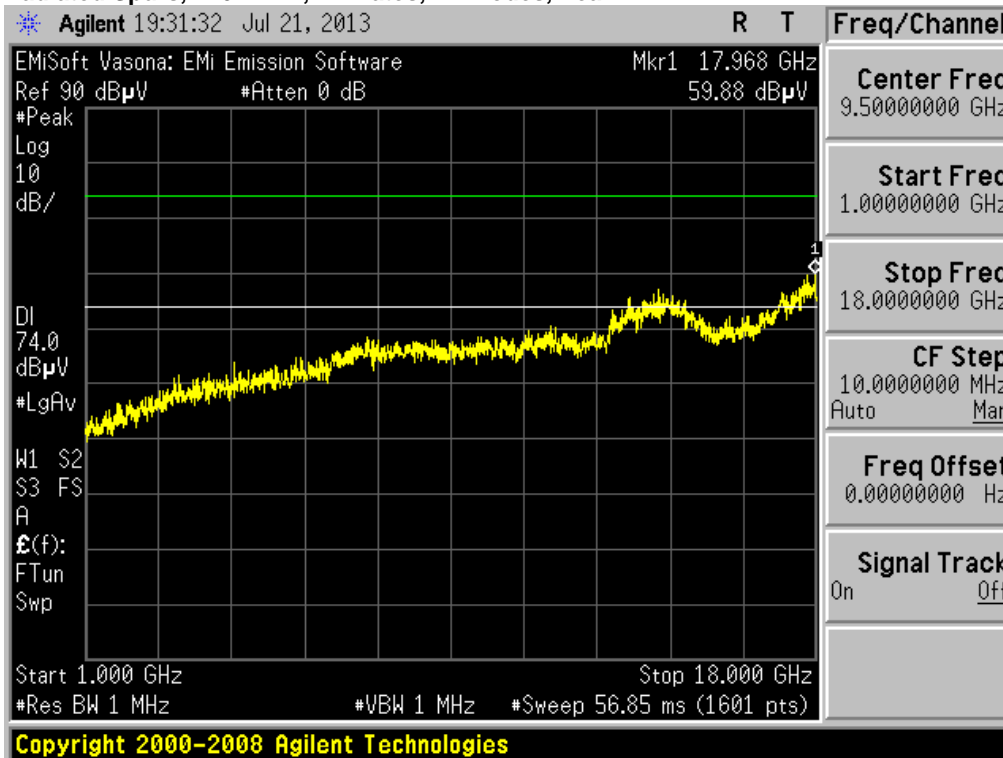





**Radiated Receiver Spurs, All Rates, All Modes, Average**

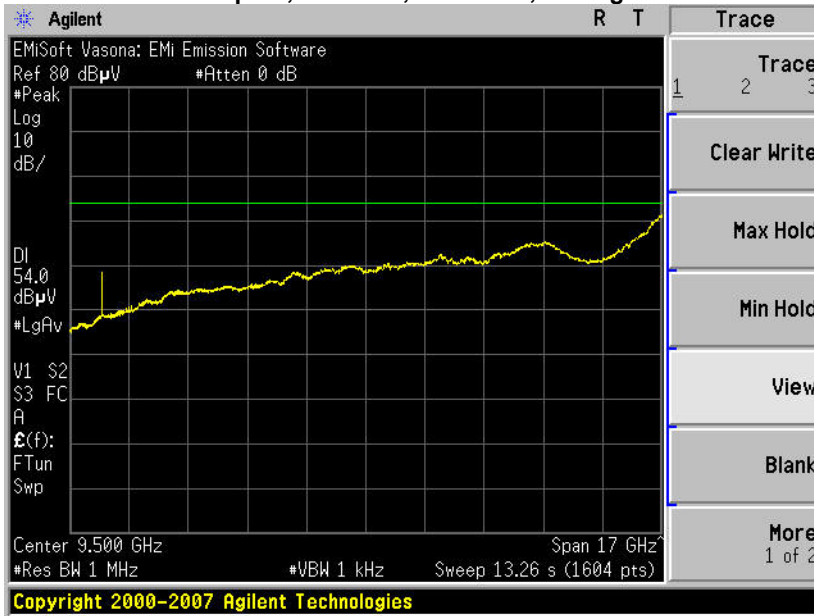

**Radiated Receiver Spurs, All Rates, All Modes, Peak**

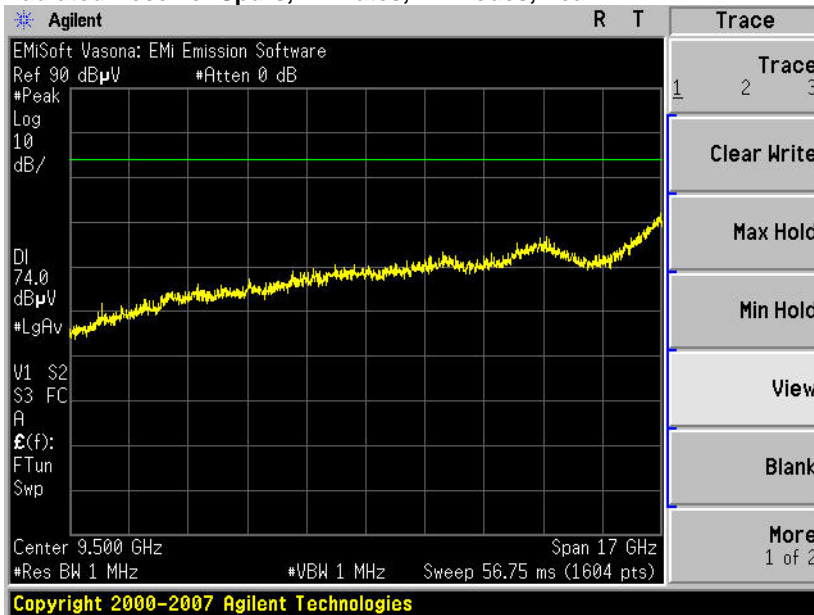

**Radiated Test Setup 1–18GHz**

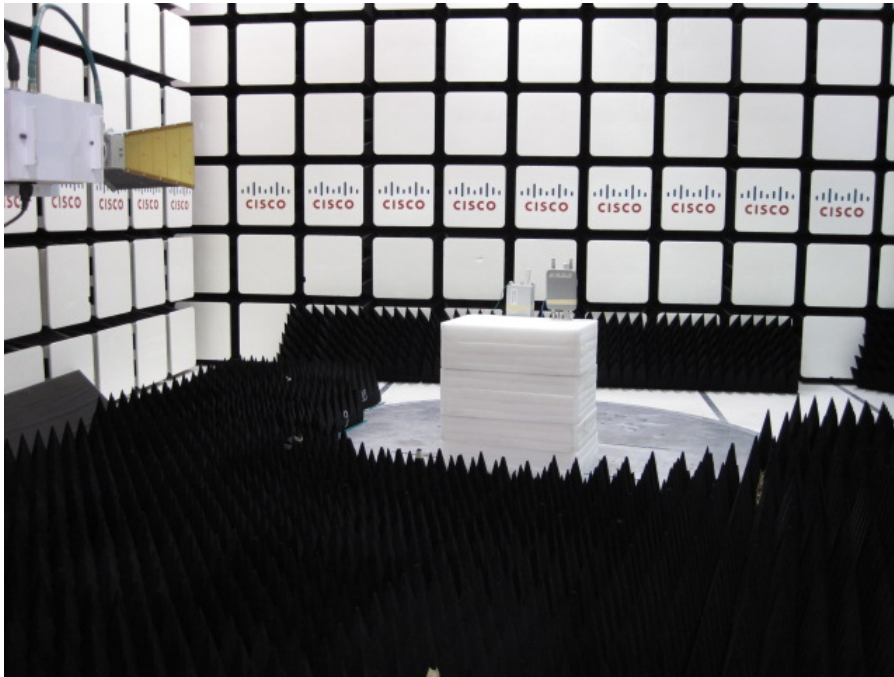


**Radiated Test Setup 18–40GHz**





### Conducted Emissions

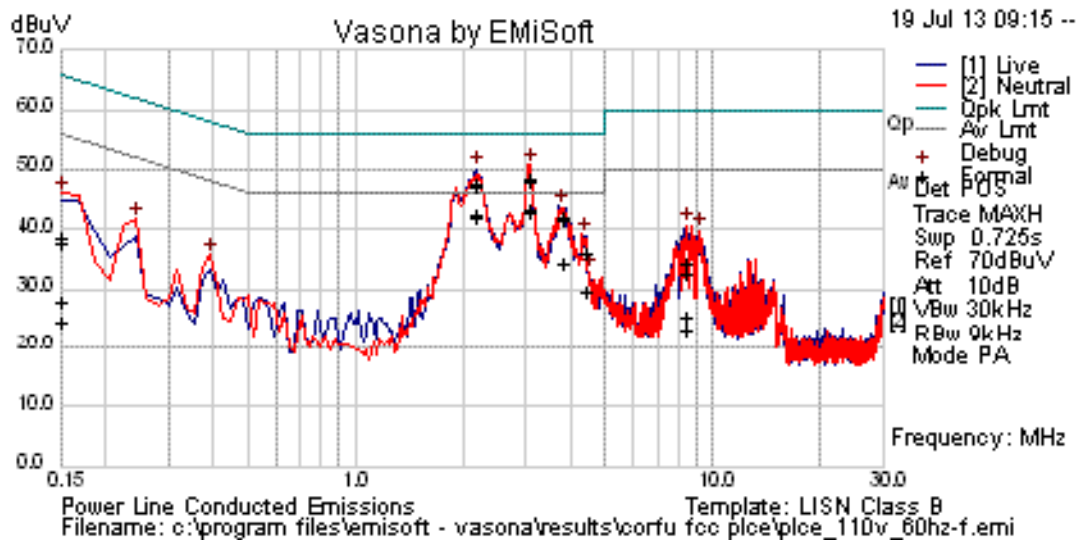

Test Results Table

No	Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
1	3.079	23.2	20.0	.0	43.2	Average	Neutral	46.0	-2.8	Pass
2	3.079	23.1	20.0	.0	43.1	Average	Live	46.0	-2.9	Pass
3	2.183	22.3	20.0	.0	42.3	Average	Neutral	46.0	-3.7	Pass
4	2.184	22.2	20.0	.0	42.2	Average	Live	46.0	-3.8	Pass
5	3.079	28.3	20.0	.0	48.3	Quasi Peak	Neutral	56.0	-7.7	Pass
6	3.079	28.2	20.0	.0	48.2	Quasi Peak	Live	56.0	-7.8	Pass
7	2.183	27.4	20.0	.0	47.5	Quasi Peak	Neutral	56.0	-8.6	Pass
8	2.184	27.3	20.0	.0	47.3	Quasi Peak	Live	56.0	-8.7	Pass
9	3.819	14.3	20.0	.1	34.3	Average	Neutral	46.0	-11.7	Pass
10	3.819	14.3	20.0	.1	34.3	Average	Live	46.0	-11.7	Pass
11	3.819	22.0	20.0	.1	42.0	Quasi Peak	Neutral	56.0	-14.0	Pass
12	3.819	21.6	20.0	.1	41.6	Quasi Peak	Live	56.0	-14.4	Pass
13	4.420	9.5	20.0	.1	29.5	Average	Neutral	46.0	-16.5	Pass
14	4.420	9.4	20.0	.1	29.5	Average	Live	46.0	-16.5	Pass
15	4.420	16.1	20.0	.1	36.2	Quasi Peak	Live	56.0	-19.8	Pass
16	4.420	16.0	20.0	.1	36.1	Quasi Peak	Neutral	56.0	-19.9	Pass
17	8.469	5.0	20.1	.1	25.2	Average	Neutral	50.0	-24.8	Pass
18	8.469	14.3	20.1	.1	34.5	Quasi Peak	Neutral	60.0	-25.5	Pass
19	8.469	2.8	20.1	.1	23.0	Average	Live	50.0	-27.0	Pass




20	.150	17.3	21.4	.1	38.8	Quasi Peak	Neutral	66.0	-27.2	Pass
21	8.469	12.6	20.1	.1	32.8	Quasi Peak	Live	60.0	-27.2	Pass
22	.150	6.3	21.4	.1	27.8	Average	Neutral	56.0	-28.2	Pass
23	.150	16.2	21.4	.1	37.7	Quasi Peak	Live	66.0	-28.3	Pass
24	.150	2.9	21.4	.1	24.4	Average	Live	56.0	-31.6	Pass

**Conducted Emission Test Setup**





### Radiated emissions

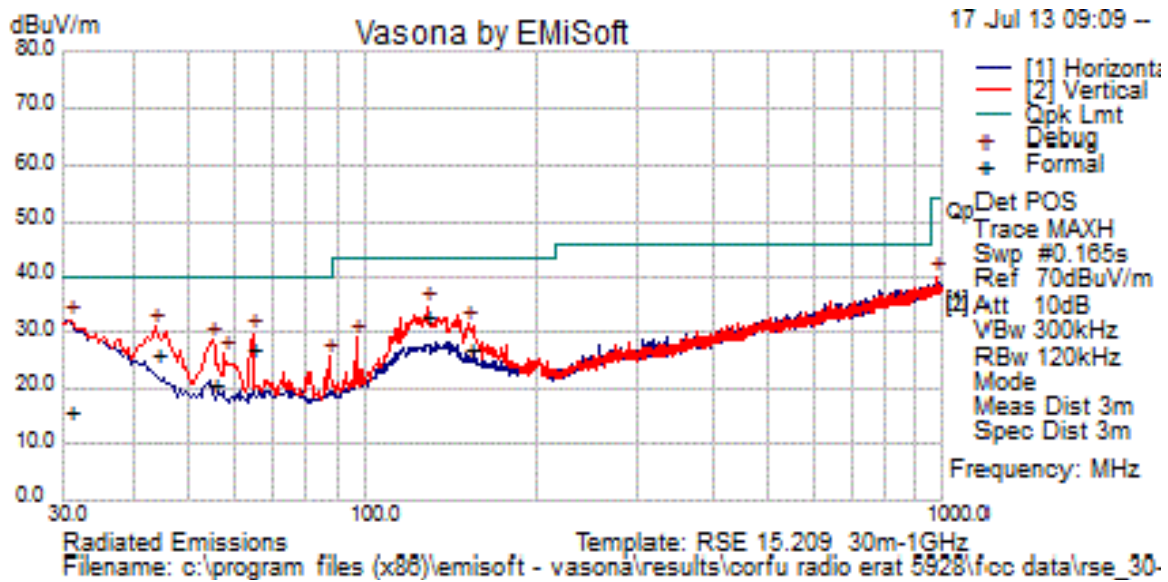

### Radiated Emissions Setup 30-1000MHz



## Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 * P * G) / d} \quad \text{and} \quad S = E^2 / 3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm<sup>2</sup>

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W}) / 1000 \quad d(\text{cm}) = 100 * d(\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d=Distance in cm

P=Power in mW

G=Numerica Antenna Gain

S=Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm}) / 10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$s = ((0.282 * 10^{((P + G) / 20)}) / d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm<sup>2</sup>



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$  maximum. The highest supported antenna gain is 6 dBi (9dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Bit Rate (Mbps)	Power Density (mW/cm <sup>2</sup> )	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
2412	11	1	28.0	3	<b>10.01</b>	20	9.99
2437	11	1	29.0	3	<b>11.23</b>	20	8.77
2462	11	1	26.0	3	<b>7.95</b>	20	12.05
2412	54	1	17.0	3	<b>2.82</b>	20	17.18
2437	54	1	24.0	3	<b>6.31</b>	20	13.69
2462	54	1	18.0	3	<b>3.16</b>	20	16.84

**MPE Calculations**

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	Bit Rate (Mbps)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Margin (mW/cm <sup>2</sup> )
2412	11	20	28.0	3	<b>0.25</b>	1	0.75
2437	11	20	29.0	3	<b>0.32</b>	1	0.68
2462	11	20	26.0	3	<b>0.16</b>	1	0.84
2412	54	20	17.0	3	<b>0.02</b>	1	0.98
2437	54	20	24.0	3	<b>0.10</b>	1	0.90
2462	54	20	18.0	3	<b>0.03</b>	1	0.97


**Appendix C: Test Equipment/Software Used to perform the test**

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
44940	Rohde & Schwarz	ESU	Spectrum Analyzer	15May13	15May14
40514	Agilent	E4440A	Spectrum Analyzer	12-NOV-12	12-NOV-13
47299	Agilent	PXA	Signal Analyzer	04Sept12	04Sept13
3003	HP	8373B	Signal Generator	26Mar13	26Mar14
30654	Sunol Sciences	JB1	Combination Antenna	16Oct12	16Oct13
4882	EMCO	3115	Horn Antenna	28Jun13	28Jun14
41935	Newport	iBTHP-5-DB9	Temperature Probe	25MAR13	25MAR14
5691	Miteq	NSP1800-25-S1	1GHz to 18GHz Pre-Amplifier	01Feb13	01Feb14
41979	Cisco	1840	18-40GHz EMI Test Head	09Jul13	09Jul14
25658	Micro-Coax	UFB311A-1-0840-504504	RF Cable	13Feb13	13Feb14
21117	Micro-Coax	UFB311A-0-2484-520520	RF Cable	24Aug12	24Aug13
48720	Huber Suhner	Sucoflex 106PA	RF Cable	20Aug12	20Aug13
47300	Agilent	MXE	EMI Receiver	13Nov12	13Nov13
8195	TTE	H613-150K-50-21378	Filter	04Jan13	04Jan14
8496	Fischer Custom	FCC-450B-2.4-N	Pulse limiter	20May13	20May14
39110	Coleman	RG-223	RF Cable, 25 ft., N	29Nov12	29Nov13
29957	Fischer	FCC-LISN-50/250-50-2-01	LISN	02Aug12	02Aug13
29959	Fischer	FCC-LISN-PA-NENA-5-15	LISN Adapter	02Aug12	02Aug13
44023	Fischer	M2	CDN	16Nov12	16Nov13
31919	Midwest Microwave	TRM-2048-MC-BNC-10	50Ohm Terminator	30Aug12	30Aug13
39162	Coleman	RG-223	RF Cable, 2 ft. BNC	09Oct12	09Oct13
25001	Micro-Coax	UFB197C-1-0240-504504	RF Cable, 2 ft.	24Mar13	24Mar14