



Test Report

AIR-CAP1532I-A-K9

Cisco Aironet 802.11n Dual Band Mesh Access Points

FCC ID: LDK102090P

IC: 2461B-102090P

Also covers:

AIR-CAP1532I -N-K9

AIR- CAP1532I -T-K9

AIR- CAP1532I -Z-K9

5725-5850 MHz

Against the following Specifications:

CFR47 Part 15.247

RSS210

LP0002

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

Test Engineer: *Bud Chilton*

Date: 9-16-2013



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW2

1.1 TEST SUMMARY.....2

SECTION 2: ASSESSMENT INFORMATION3

2.1 GENERAL3

2.2 DATE OF TESTING.....4

2.3 REPORT ISSUE DATE4

2.4 TESTING FACILITIES.....4

2.5 EQUIPMENT ASSESSED (EUT)4

2.6 EUT DESCRIPTION.....5

SECTION 4: SAMPLE DETAILS.....6

APPENDIX A: EMISSION TEST RESULTS.....7

 TARGET MAXIMUM CHANNEL POWER.....7

 6DB BANDWIDTH8

 99% AND 26DB BANDWIDTH.....15

 PEAK OUTPUT POWER22

 POWER SPECTRAL DENSITY39

 CONDUCTED SPURIOUS EMISSION46

APPENDIX B: EMISSION TEST RESULTS.....113

 RADIATED SPURIOUS EMISSIONS113

 CONDUCTED EMISSIONS.....120

 RADIATED EMISSIONS121

 MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....123

APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST125

Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247 RSS210 LP0002	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
 - Temperature 15°C to 35°C (54°F to 95°F)
 - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
 - Humidity 10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
 - 110V 60 Hz (+/-20%)
 - 220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of testing

7/12/2013

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson, Bud Chiller

2.5 Equipment Assessed (EUT)

AIR-CAP1532I-A-K9 Cisco Aironet 802.11n Radio Module



2.6 EUT Description

The 1532 Series Cisco Aironet 802.11n Radio Modules support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT/VHT-20, One Antenna, 6 to 54 Mbps
 Non HT/VHT-20, Two Antennas, 6 to 54 Mbps

HT/VHT-20, One Antenna, M0 to M7
 HT/VHT-20, Two Antennas, M0 to M15

HT/VHT-20 STBC, Two Antennas, M0 to M7
 HT/VHT-20 STBC, Three Antennas, M0 to M7

Non HT/VHT-40 Duplicate, One Antenna, 6-54 Mbps
 Non HT/VHT-40 Duplicate, Two Antennas, 6-54 Mbps

HT/VHT-40, One Antenna, M0 to M7
 HT/VHT-40, Two Antennas, M0 to M15

HT/VHT-40 STBC, Two Antennas, M0 to M7

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4 / 5 GHz	Internal	Dual-resonant Omni	3 / 5



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the “Justification for worst Case test Configuration” section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP1532I-A-K9		Cisco Systems	NA	NA	NA	
S02	PoE supply	9501GO	Microsemi	NA	NA	NA	

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting



Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5745	5785	5825
Non HT-20, 6 to 54 Mbps	27	26	26
HT-20, M0 to M15	27	26	26
HT-20 STBC, M0 to M7	27	26	26
	5755		5795
Non HT-40 Duplicate, 6 to 54 Mbps	25		26
HT-40, M0 to M15	26		26
HT-40 STBC, M0 to M7	26		26



6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 5725-5850MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	100 kHz
X dB Bandwidth:	6 dB
Detector:	Peak
Trace:	Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:




Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT-20, M0 to M23	m0	17.2	>500	16.7
5755	Non HT-40, 6 to 54 Mbps	6	35.9	>500	35.4
	HT-40, M0 to M23	m0	35.9	>500	35.4
5785	Non HT-20, 6 to 54 Mbps	6	16.3	>500	15.8
	HT-20, M0 to M23	m0	17.3	>500	16.8
5795	Non HT-40, 6 to 54 Mbps	6	35.9	>500	35.4
	HT-40, M0 to M23	m0	35.9	>500	35.4
5825	Non HT-20, 6 to 54 Mbps	6	16.3	>500	15.8
	HT-20, M0 to M23	m0	17.2	>500	16.7



6dB Bandwidth, 5745 MHz, Non HT-20, 6 to 54 Mbps

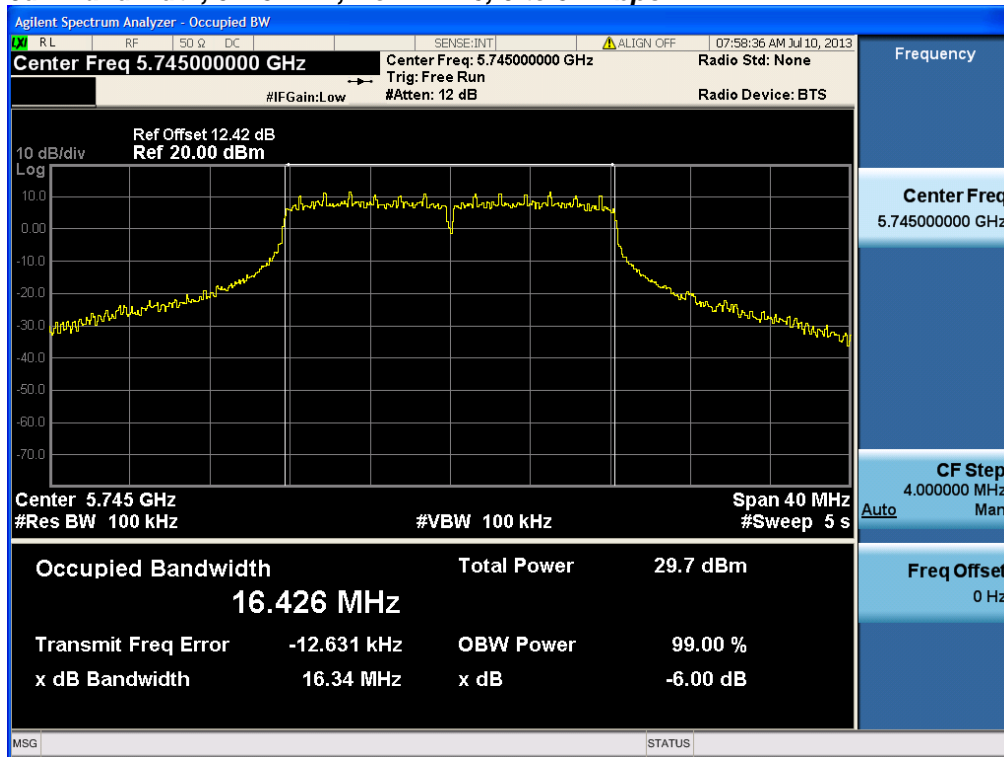


6dB Bandwidth, 5745 MHz, HT-20, M0 to M23

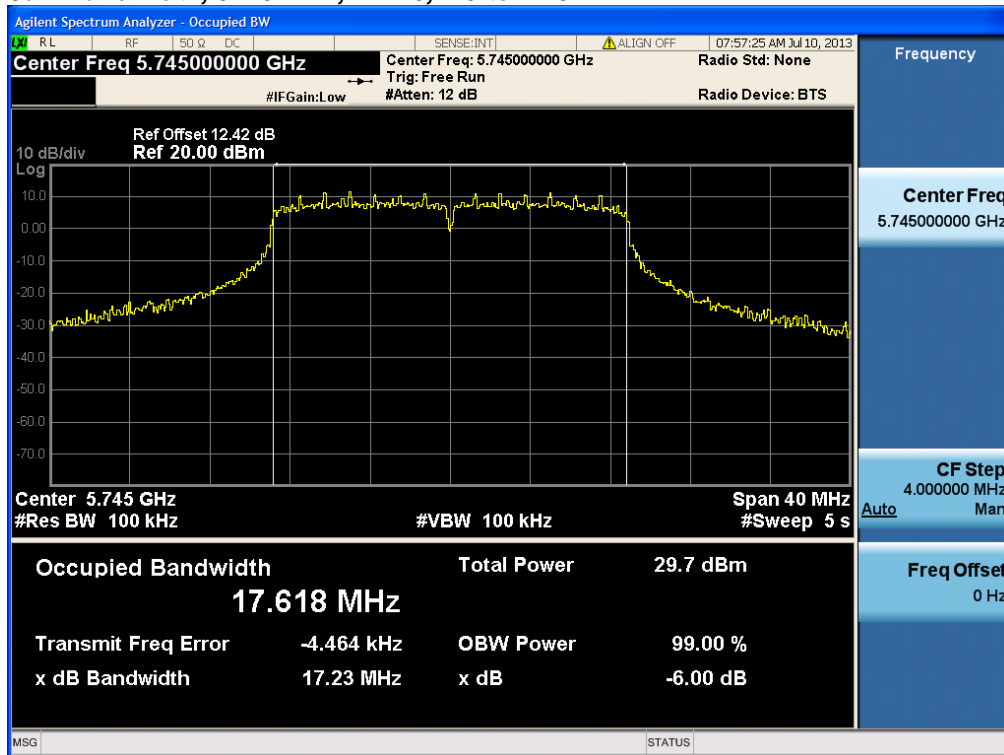




6dB Bandwidth, 5755 MHz, Non HT-40, 6 to 54 Mbps

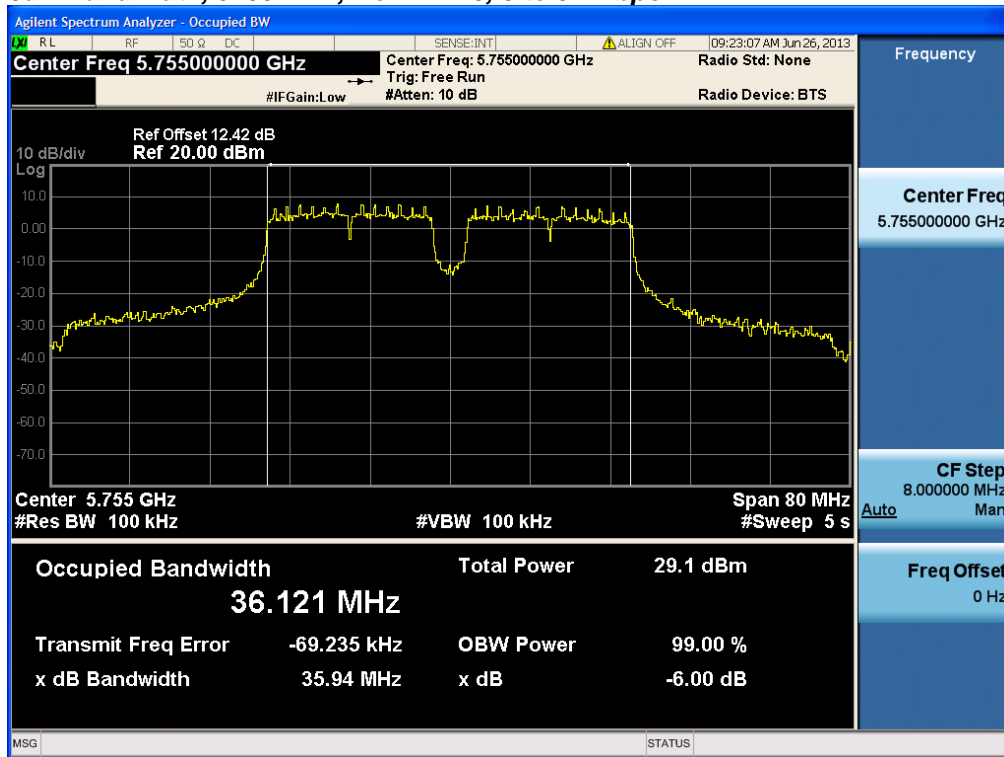


6dB Bandwidth, 5755 MHz, HT-40, M0 to M23

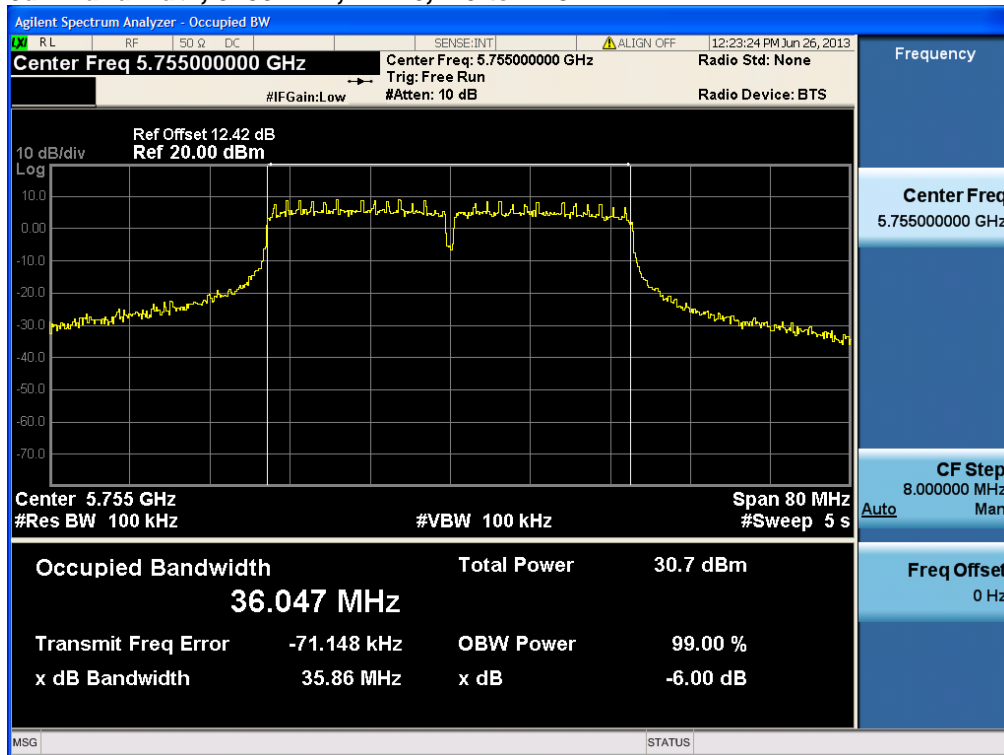




6dB Bandwidth, 5785 MHz, Non HT-20, 6 to 54 Mbps

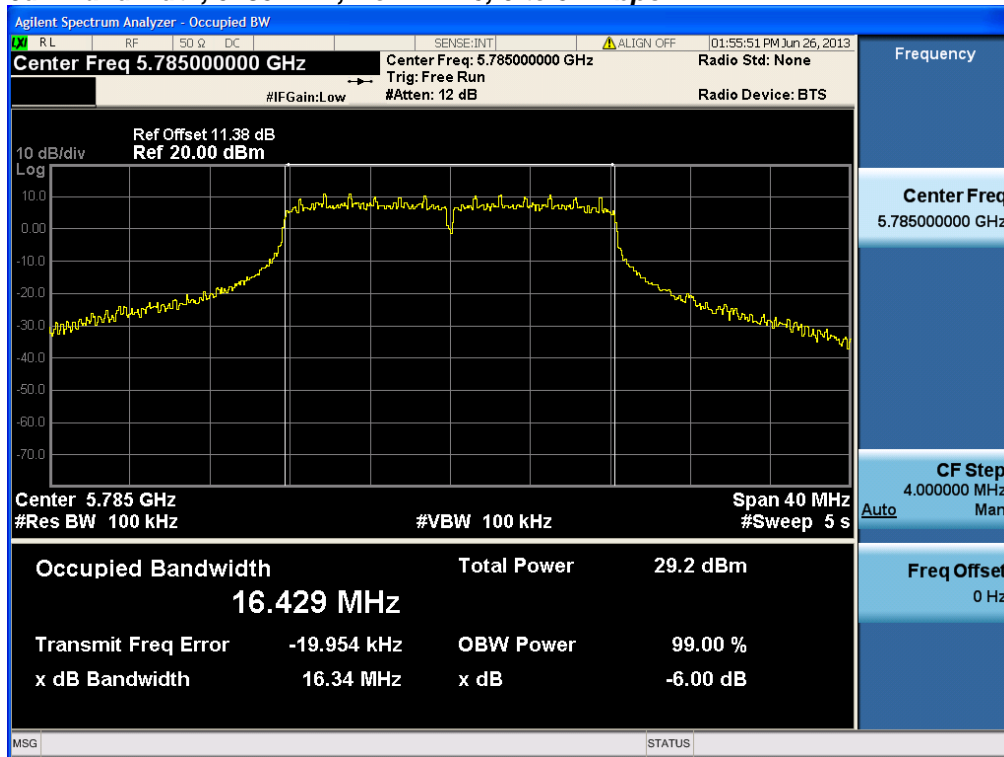


6dB Bandwidth, 5785 MHz, HT-20, M0 to M23

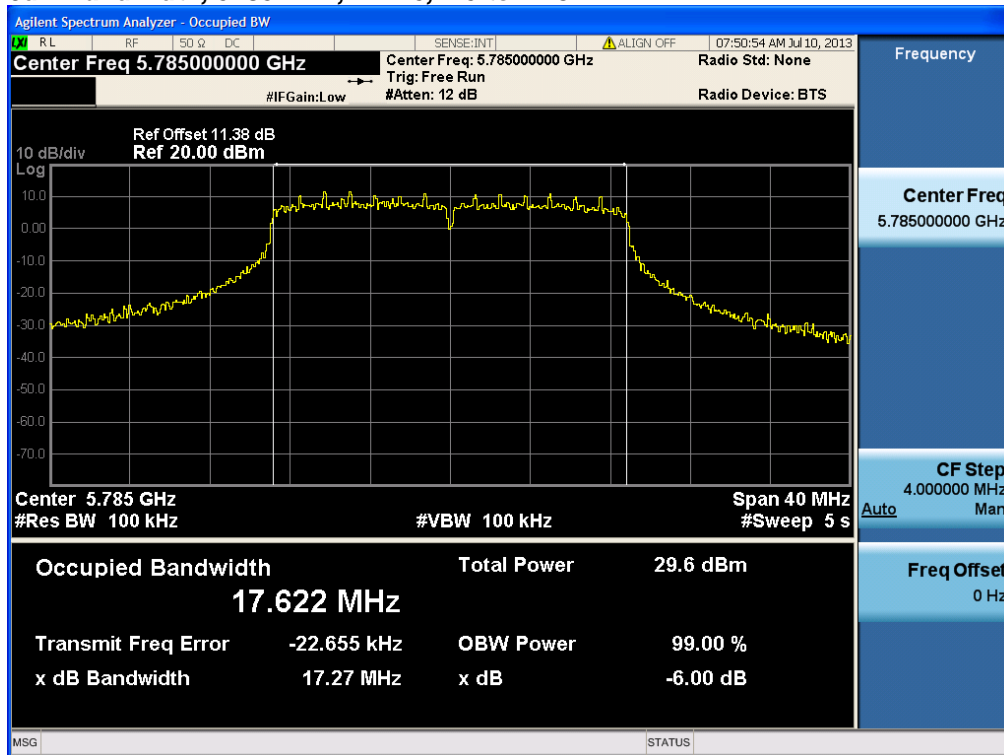




6dB Bandwidth, 5795 MHz, Non HT-40, 6 to 54 Mbps

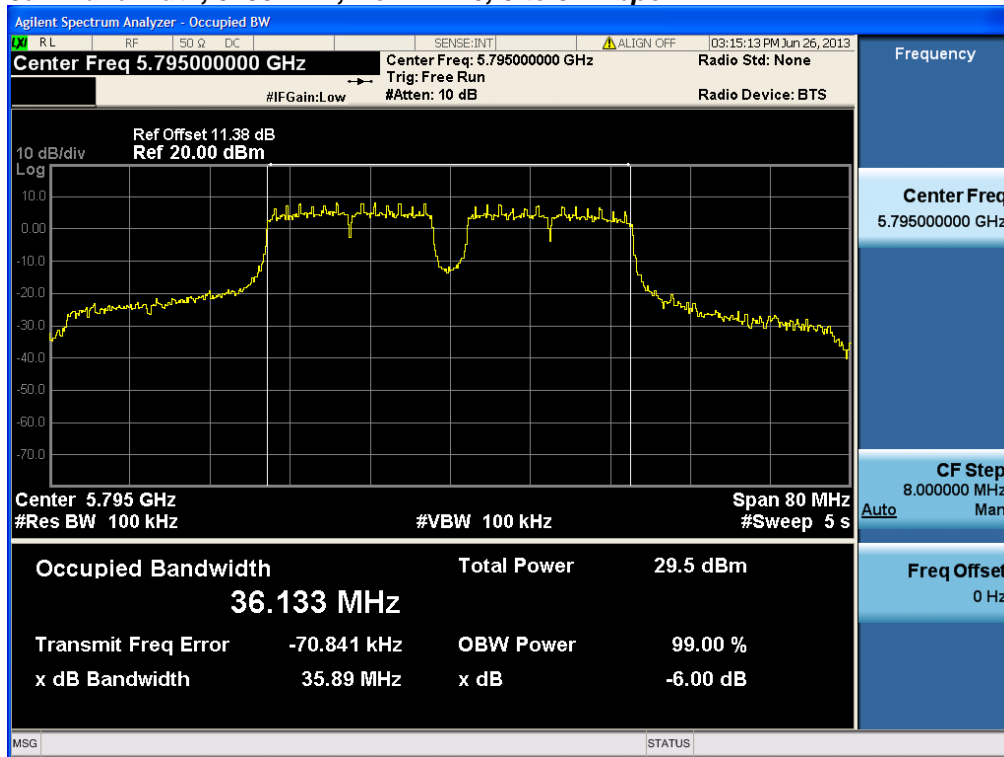


6dB Bandwidth, 5795 MHz, HT-40, M0 to M23

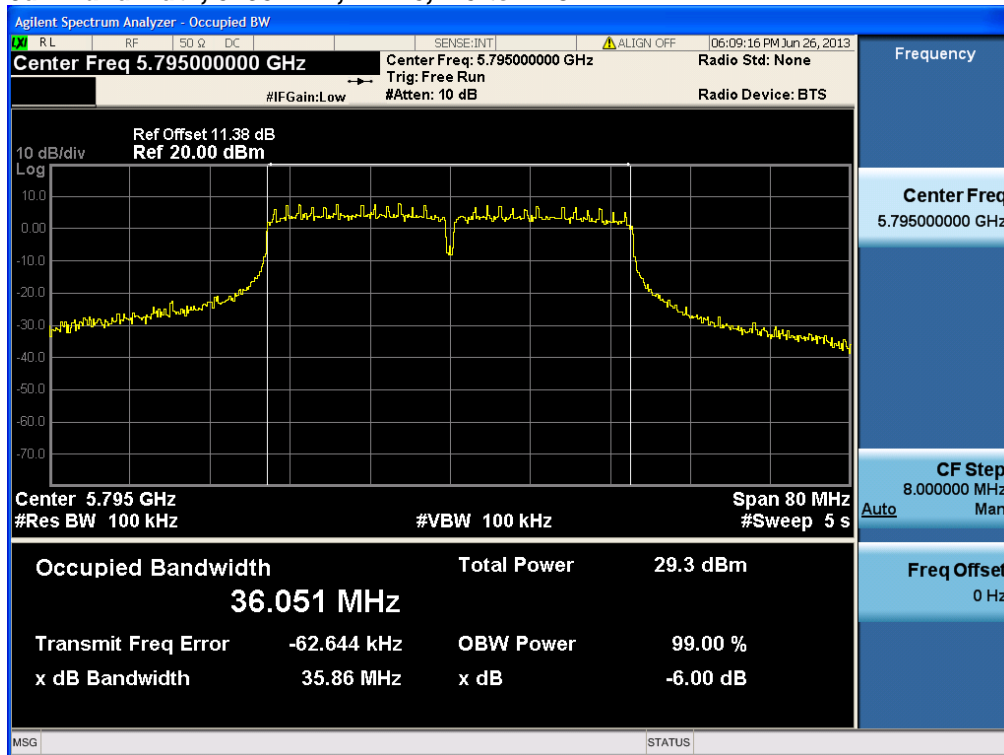




6dB Bandwidth, 5825 MHz, Non HT-20, 6 to 54 Mbps

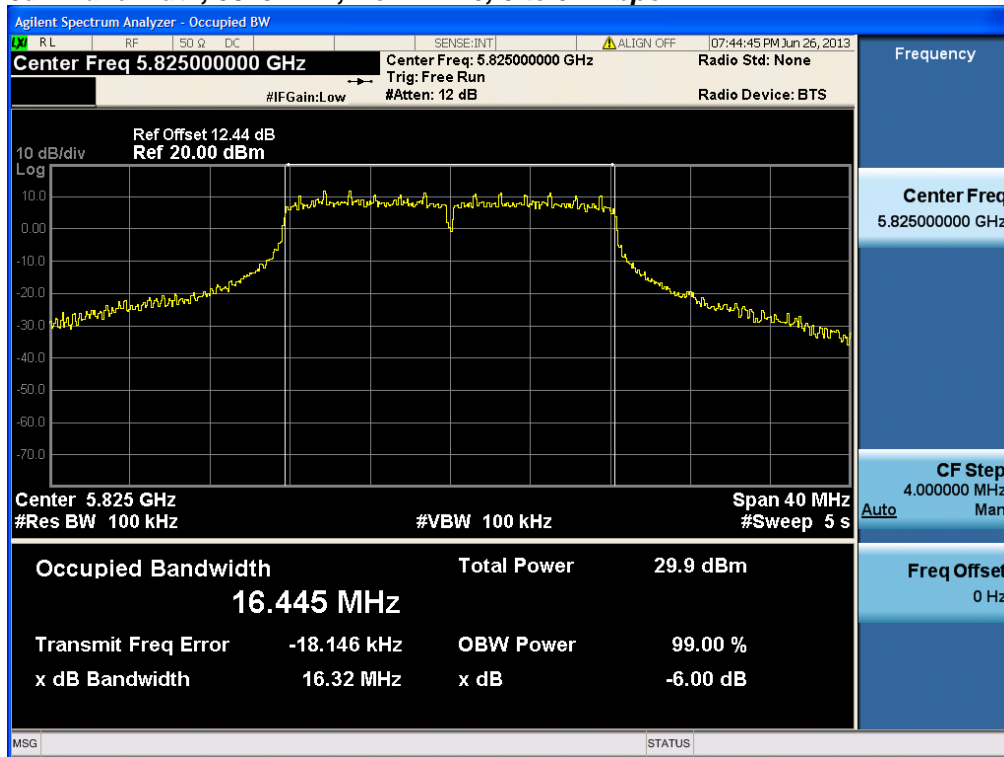

6dB Bandwidth, 5825 MHz, HT-20, M0 to M23

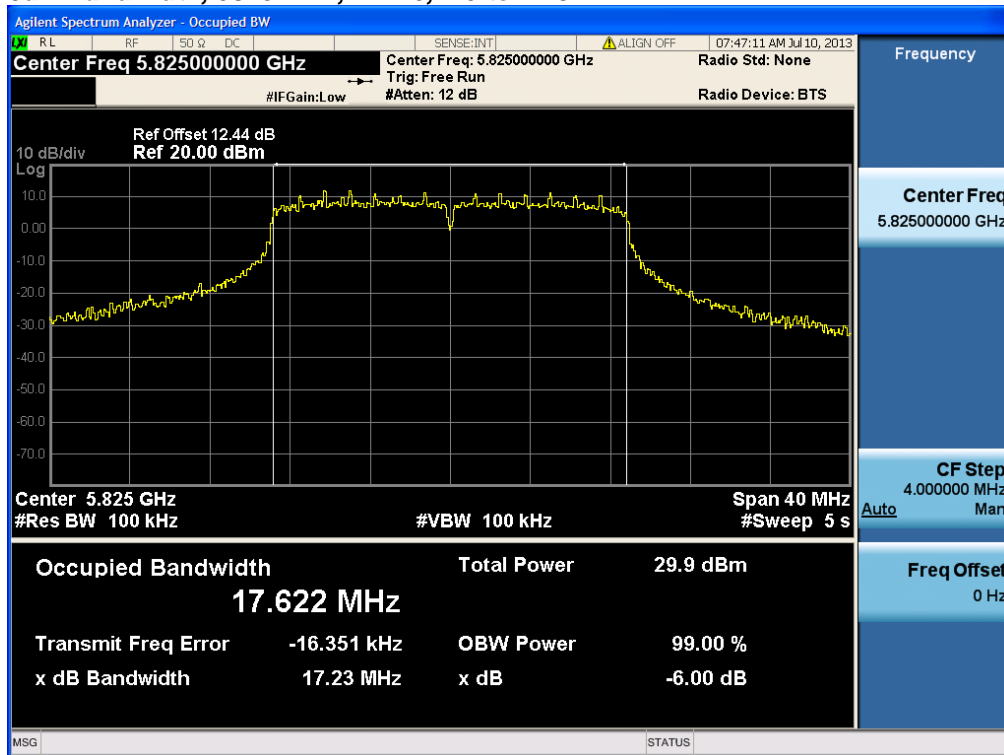



99% and 26dB Bandwidth

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:




Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	19.9	16.4
	HT-20, M0 to M23	m0	20.6	17.6
5755	Non HT-40, 6 to 54 Mbps	6	40	36.1
	HT-40, M0 to M23	m0	40.8	36
5785	Non HT-20, 6 to 54 Mbps	6	19.9	16.4
	HT-20, M0 to M23	m0	20.4	17.6
5795	Non HT-40, 6 to 54 Mbps	6	39.8	36.1
	HT-40, M0 to M23	m0	39.7	36
5825	Non HT-20, 6 to 54 Mbps	6	19.9	16.4
	HT-20, M0 to M23	m0	20.6	17.6



26dB / 99% Bandwidth, 5745 MHz, Non HT-20, 6 to 54 Mbps

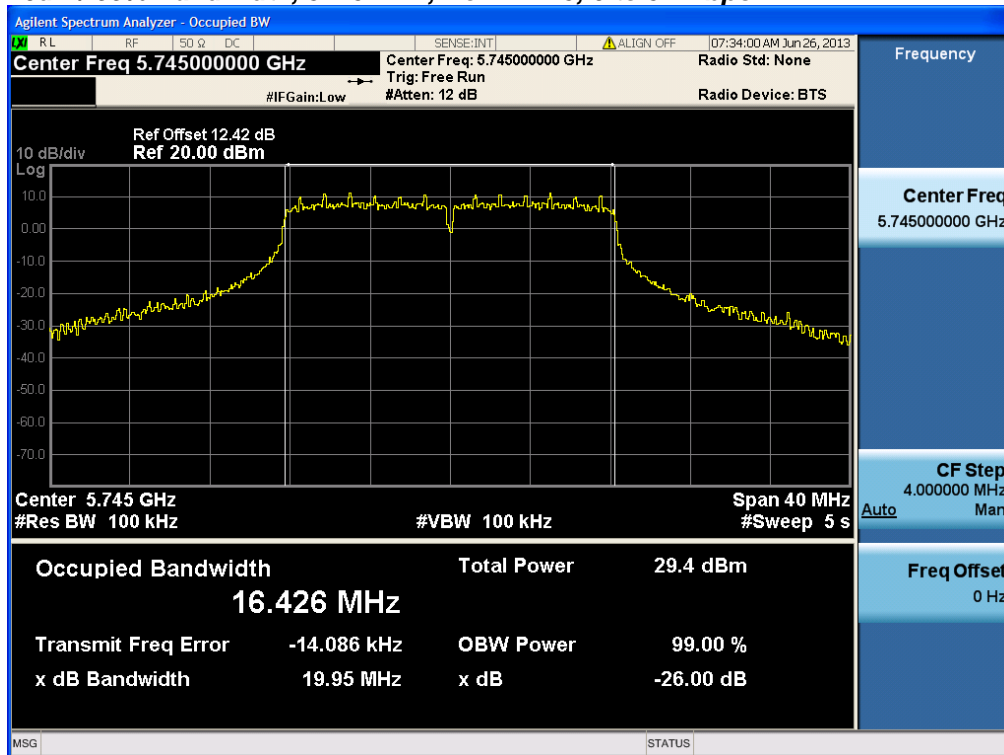


26dB / 99% Bandwidth, 5745 MHz, HT-20, M0 to M23

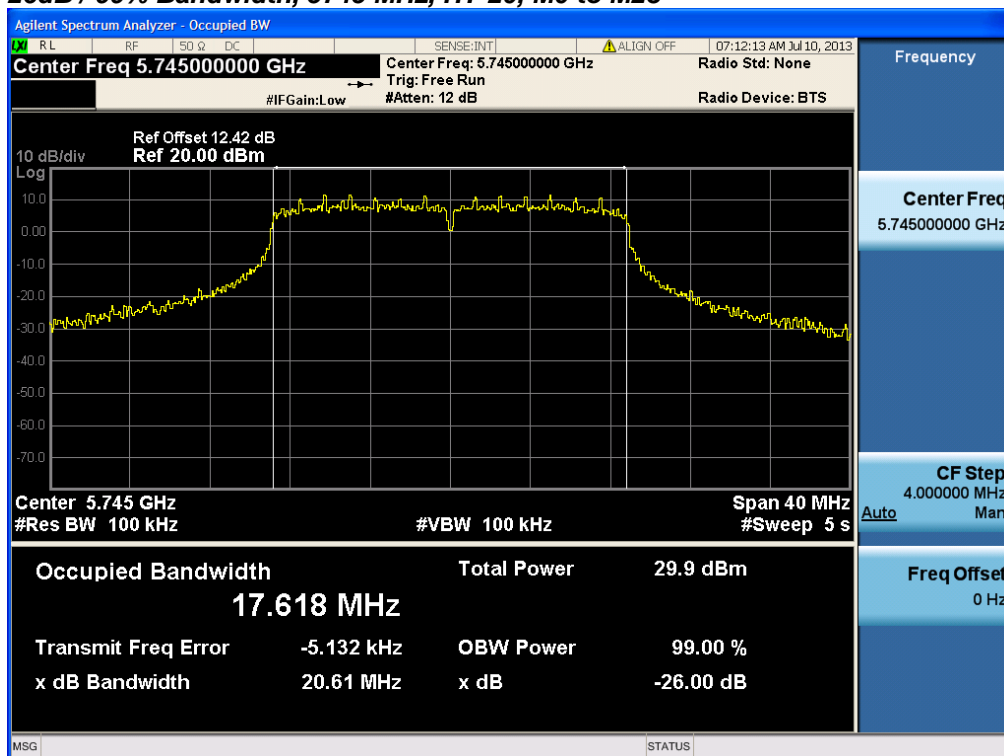




26dB / 99% Bandwidth, 5755 MHz, Non HT-40, 6 to 54 Mbps

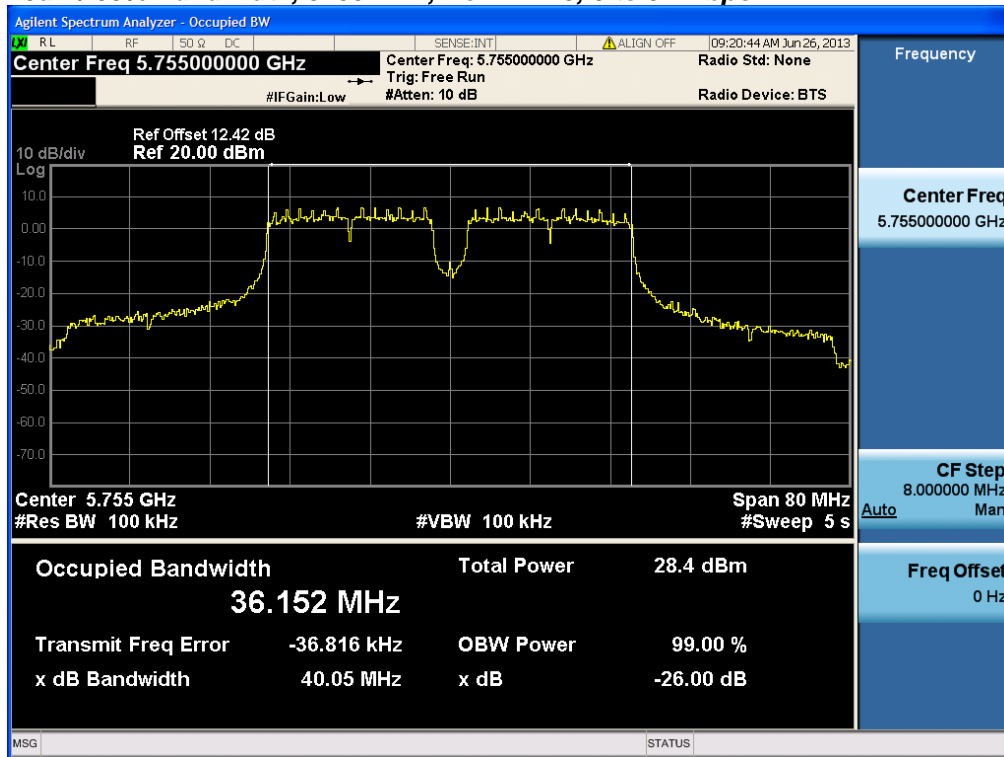


26dB / 99% Bandwidth, 5755 MHz, HT-40, M0 to M23

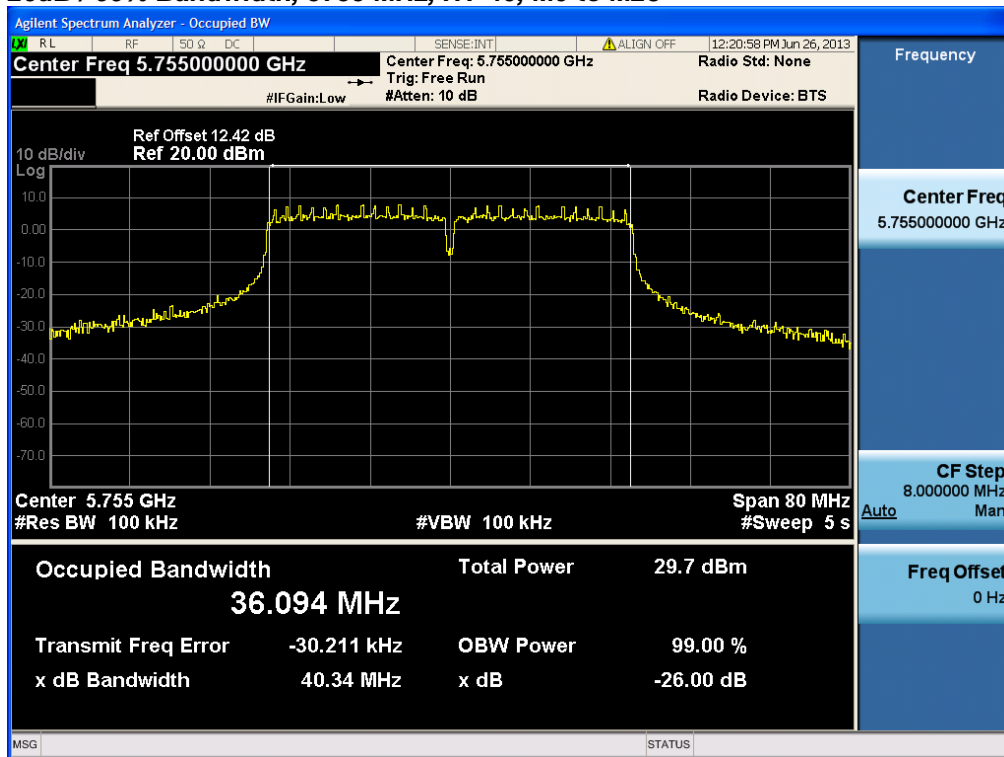




26dB / 99% Bandwidth, 5785 MHz, Non HT-20, 6 to 54 Mbps

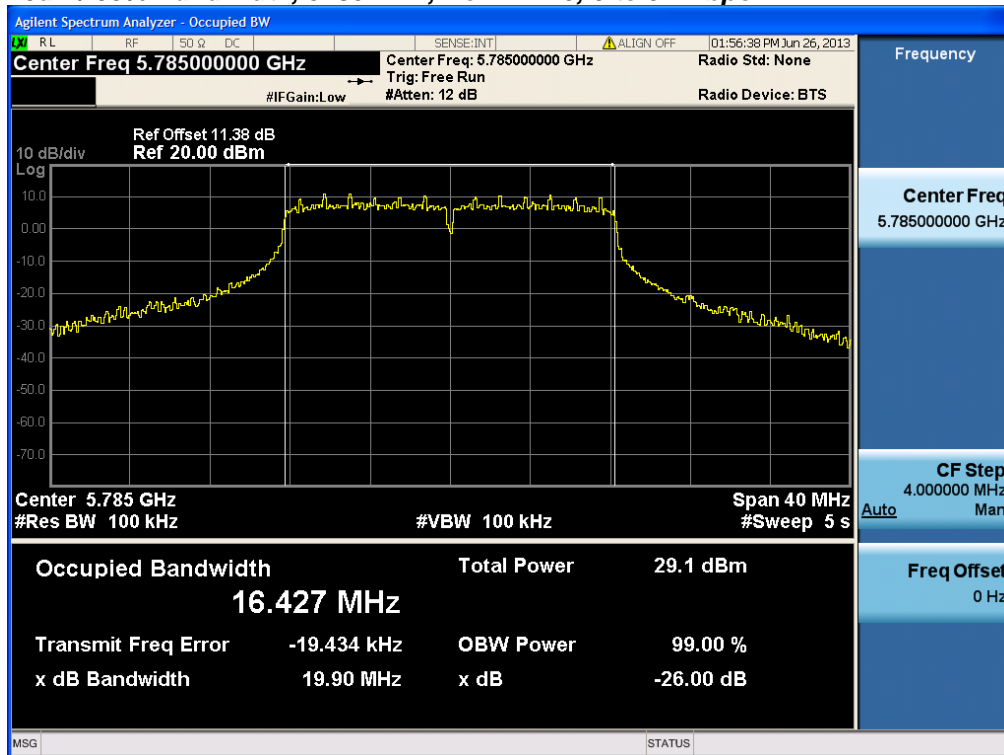


26dB / 99% Bandwidth, 5785 MHz, HT-20, M0 to M23

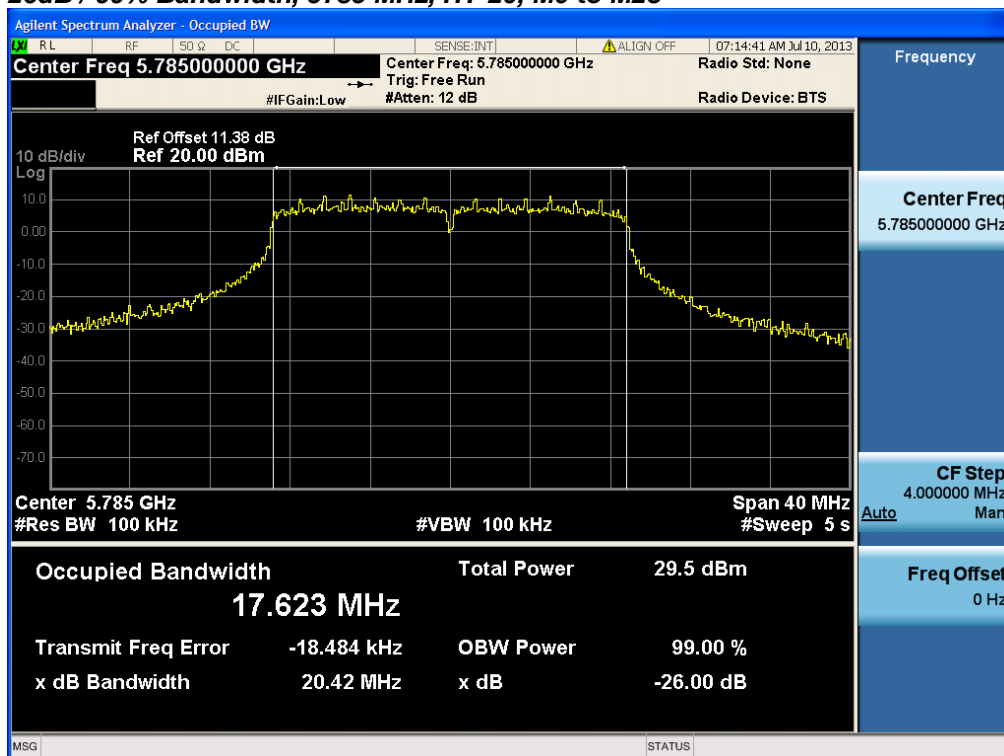




26dB / 99% Bandwidth, 5795 MHz, Non HT-40, 6 to 54 Mbps

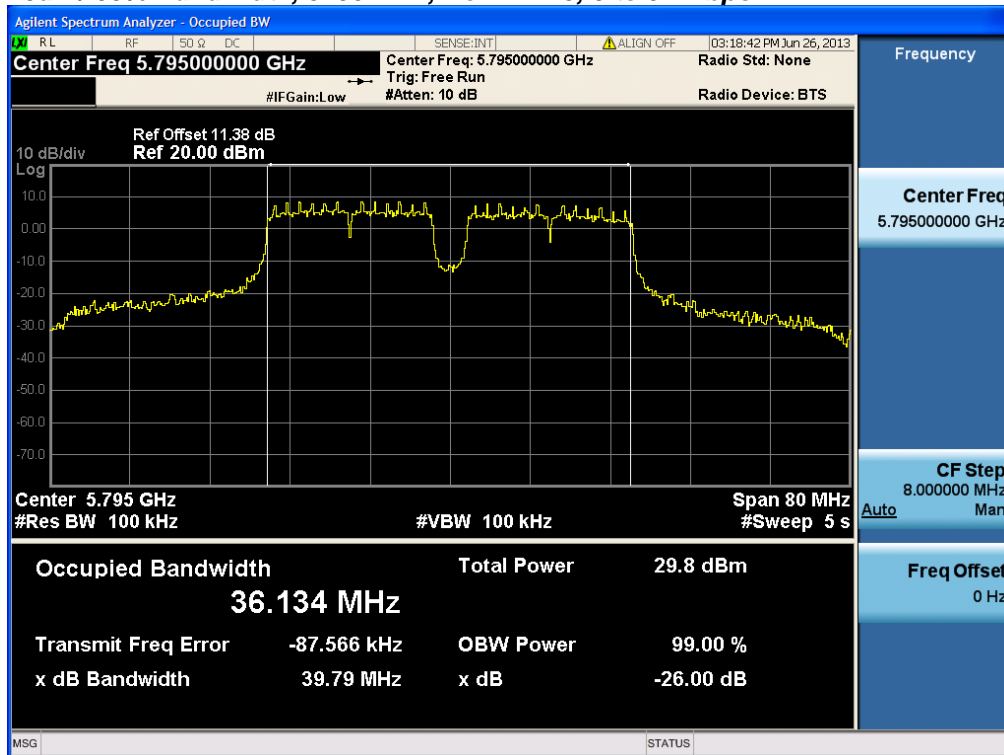


26dB / 99% Bandwidth, 5795 MHz, HT-40, M0 to M23

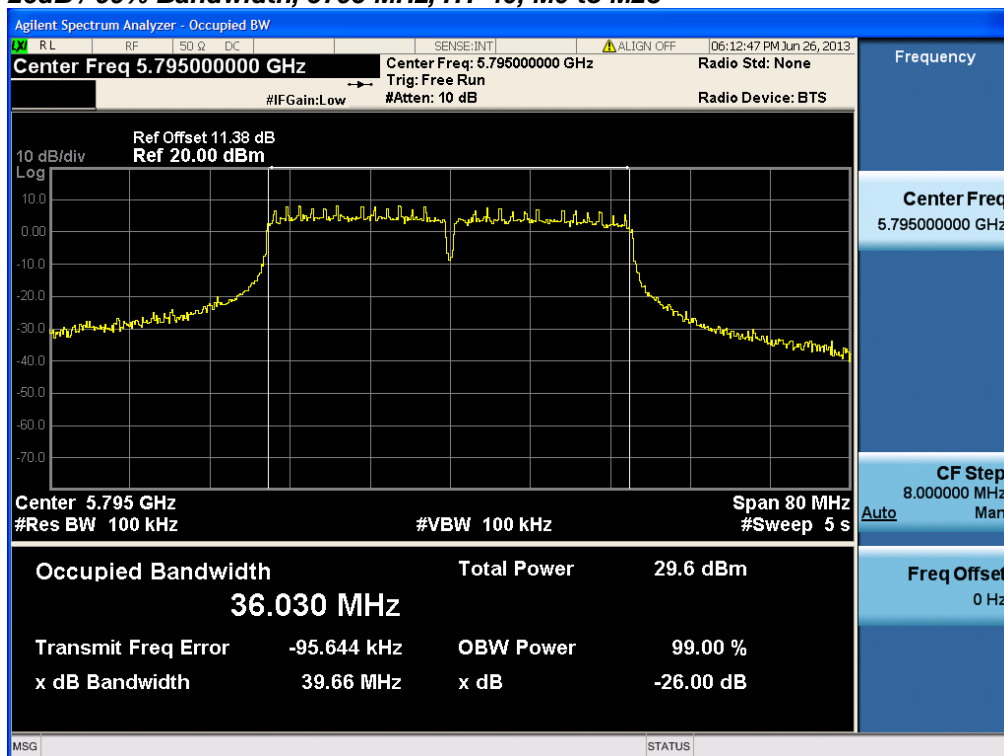




26dB / 99% Bandwidth, 5825 MHz, Non HT-20, 6 to 54 Mbps

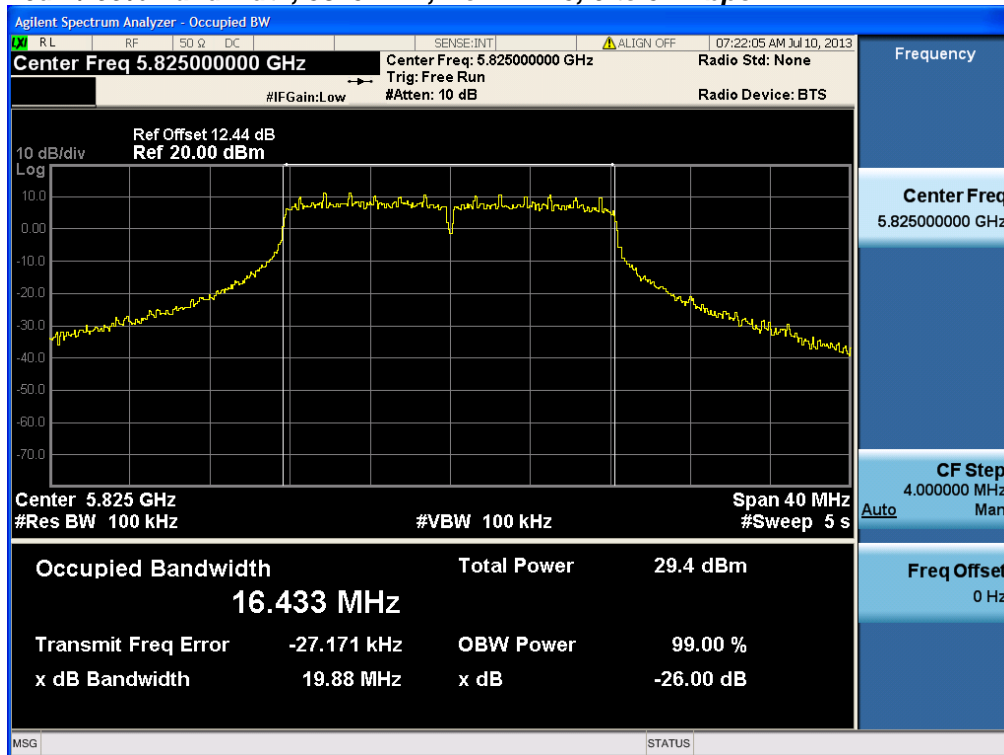

26dB / 99% Bandwidth, 5825 MHz, HT-20, M0 to M23

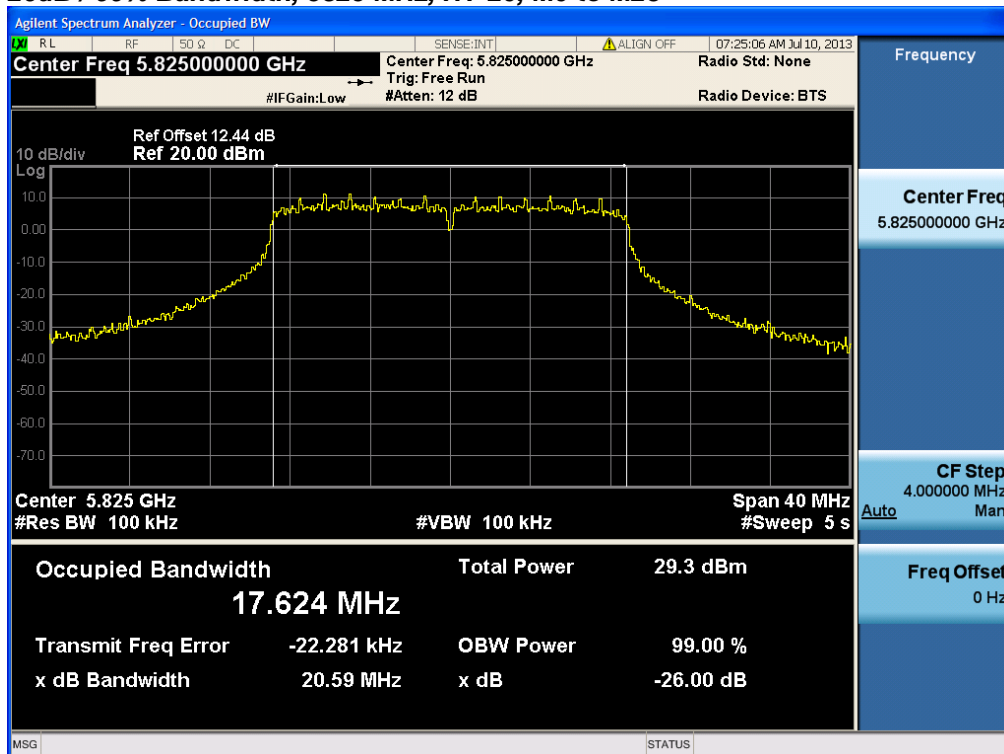



Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 5745-5850 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 5dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=26 dB BW from 26 dB Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	5	23.1		23.1	30	6.9
	Non HT-20, 6 to 54 Mbps	2	5	23.1	24.2	26.7	30	3.3
	HT-20, M0 to M7	1	5	23.0		23.0	30	7.0
	HT-20, M0 to M7	2	5	23.0	24.1	26.6	30	3.4
	HT-20, M8 to M15	2	5	23.0	24.1	26.6	30	3.4
	HT-20 STBC, M0 to M7	2	5	23.0	24.1	26.6	30	3.4
5755	Non HT-40, 6 to 54 Mbps	1	5	21.8		21.8	30	8.2
	Non HT-40, 6 to 54 Mbps	2	5	21.8	22.4	25.1	30	4.9
	HT-40, M0 to M7	1	5	22.9		22.9	30	7.1
	HT-40, M0 to M7	2	5	22.9	23.9	26.4	30	3.6
	HT-40, M8 to M15	2	5	22.9	23.9	26.4	30	3.6
	HT-40 STBC, M0 to M7	2	5	22.9	23.9	26.4	30	3.6
5785	Non HT-20, 6 to 54 Mbps	1	5	22.7		22.7	30	7.3
	Non HT-20, 6 to 54 Mbps	2	5	22.7	23.2	26.0	30	4.0
	HT-20, M0 to M7	1	5	22.7		22.7	30	7.3
	HT-20, M0 to M7	2	5	22.7	23.1	25.9	30	4.1
	HT-20, M8 to M15	2	5	22.7	23.1	25.9	30	4.1
	HT-20 STBC, M0 to M7	2	5	22.7	23.1	25.9	30	4.1
5795	Non HT-40, 6 to 54 Mbps	1	5	22.8		22.8	30	7.2
	Non HT-40, 6 to 54 Mbps	2	5	22.8	23.1	26.0	30	4.0
	HT-40, M0 to M7	1	5	22.4		22.4	30	7.6
	HT-40, M0 to M7	2	5	22.4	22.7	25.6	30	4.4
	HT-40, M8 to M15	2	5	22.4	22.7	25.6	30	4.4
	HT-40 STBC, M0 to M7	2	5	22.4	22.7	25.6	30	4.4
5825	Non HT-20, 6 to 54 Mbps	1	5	23.4		23.4	30	6.6
	Non HT-20, 6 to 54 Mbps	2	5	23.4	23.1	26.3	30	3.7
	HT-20, M0 to M7	1	5	23.1		23.1	30	6.9
	HT-20, M0 to M7	2	5	23.1	22.8	26.0	30	4.0
	HT-20, M8 to M15	2	5	23.1	22.8	26.0	30	4.0
	HT-20 STBC, M0 to M7	2	5	23.1	22.8	26.0	30	4.0



Peak Output Power, 5745 MHz, Non HT-20, 6 to 54 Mbps



Antenna A

Peak Output Power, 5745 MHz, Non HT-20, 6 to 54 Mbps



Antenna A



Antenna B



Peak Output Power, 5745 MHz, HT-20, M0 to M7



Antenna A

Peak Output Power, 5745 MHz, HT-20, M0 to M7



Antenna A



Antenna B



Peak Output Power, 5745 MHz, HT-20, M8 to M15




Antenna A



Antenna B

Peak Output Power, 5745 MHz, HT-20 STBC, M0 to M7

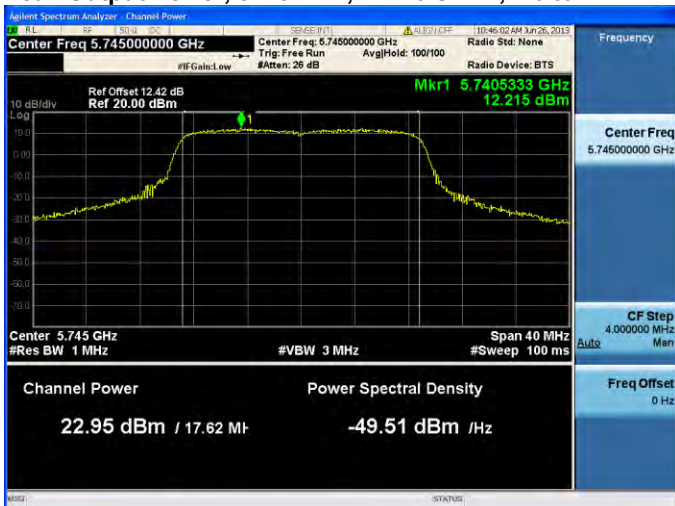

Antenna A



Antenna B



Peak Output Power, 5755 MHz, Non HT-40, 6 to 54 Mbps



Antenna A

Peak Output Power, 5755 MHz, Non HT-40, 6 to 54 Mbps



Antenna A



Antenna B



Peak Output Power, 5755 MHz, HT-40, M0 to M7



Antenna A

Peak Output Power, 5755 MHz, HT-40, M0 to M7




Antenna A




Antenna B



Peak Output Power, 5755 MHz, HT-40, M8 to M15

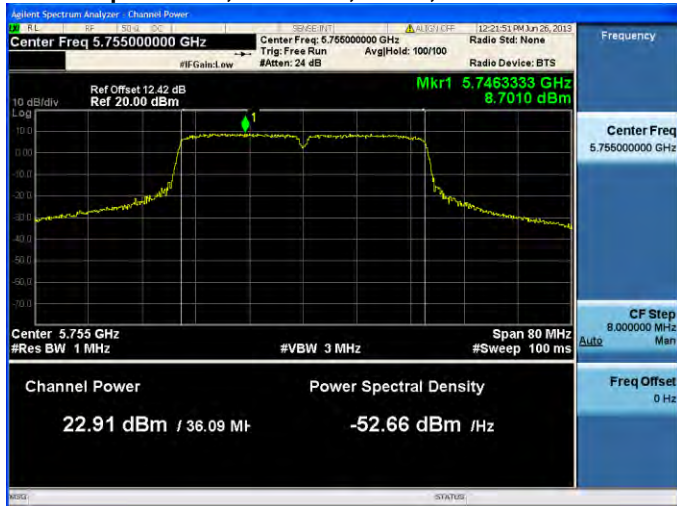

Antenna A

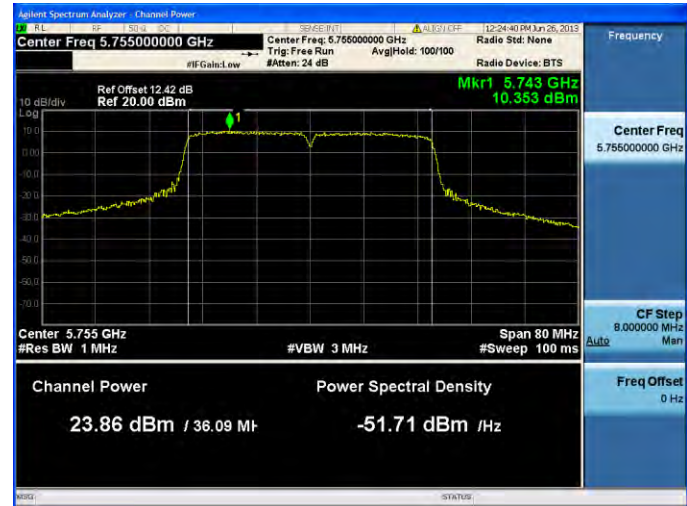


Antenna B

Peak Output Power, 5755 MHz, HT-40 STBC, M0 to M7




Antenna A

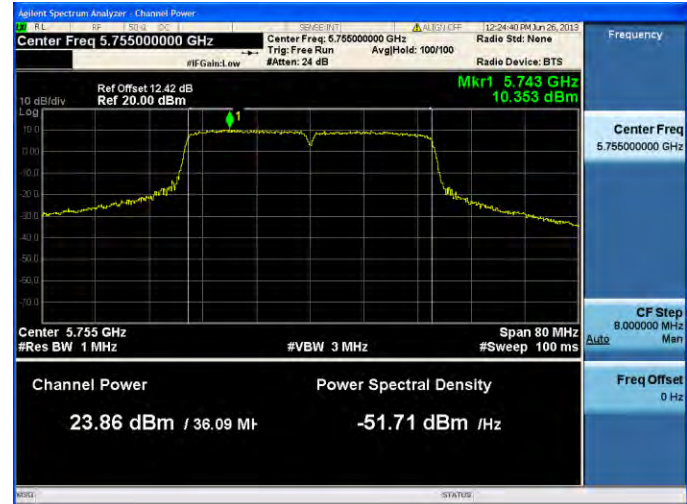

Antenna B




Peak Output Power, 5785 MHz, Non HT-20, 6 to 54 Mbps

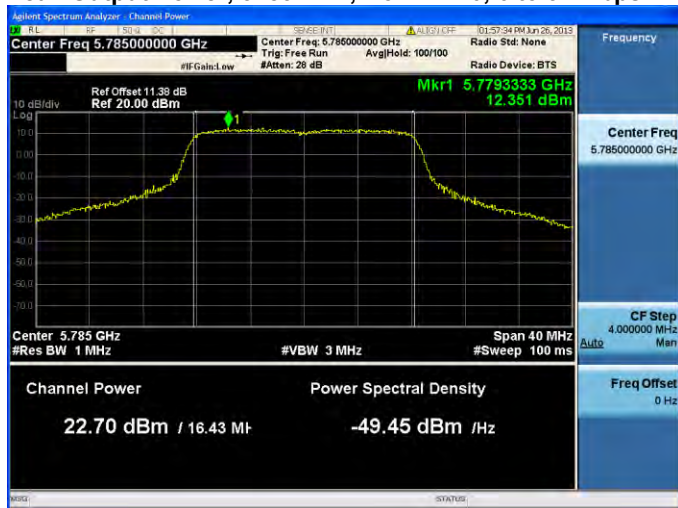

Antenna A

Peak Output Power, 5785 MHz, Non HT-20, 6 to 54 Mbps

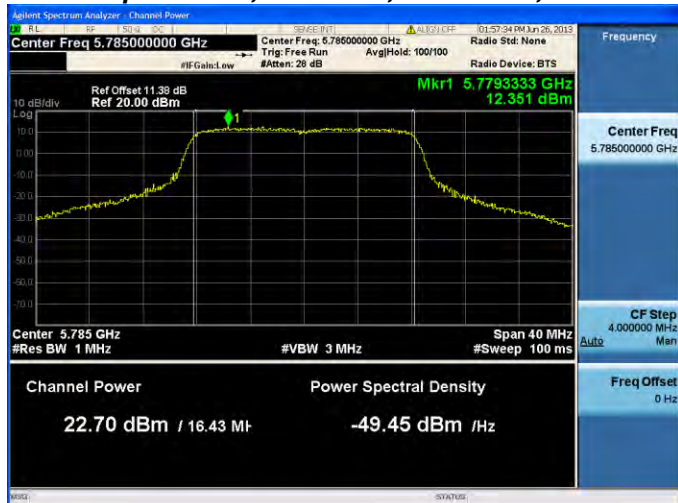

Antenna A



Antenna B




Peak Output Power, 5785 MHz, HT-20, M0 to M7



Antenna A

Peak Output Power, 5785 MHz, HT-20, M0 to M7

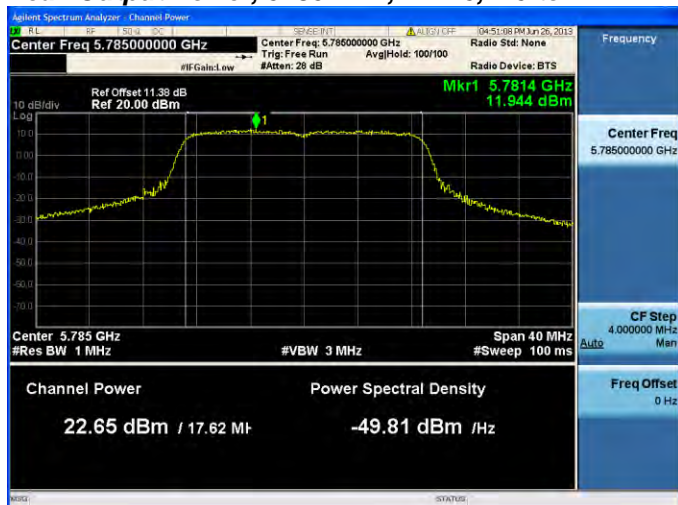

Antenna A



Antenna B



Peak Output Power, 5785 MHz, HT-20, M8 to M15



Antenna A



Antenna B

Peak Output Power, 5785 MHz, HT-20 STBC, M0 to M7



Antenna A



Antenna B



Peak Output Power, 5795 MHz, Non HT-40, 6 to 54 Mbps



Antenna A

Peak Output Power, 5795 MHz, Non HT-40, 6 to 54 Mbps



Antenna A



Antenna B



Peak Output Power, 5795 MHz, HT-40, M0 to M7



Antenna A

Peak Output Power, 5795 MHz, HT-40, M0 to M7



Antenna A



Antenna B



Peak Output Power, 5795 MHz, HT-40, M8 to M15



Antenna A



Antenna B

Peak Output Power, 5795 MHz, HT-40 STBC, M0 to M7



Antenna A



Antenna B



Peak Output Power, 5825 MHz, Non HT-20, 6 to 54 Mbps




Antenna A

Peak Output Power, 5825 MHz, Non HT-20, 6 to 54 Mbps



Antenna A

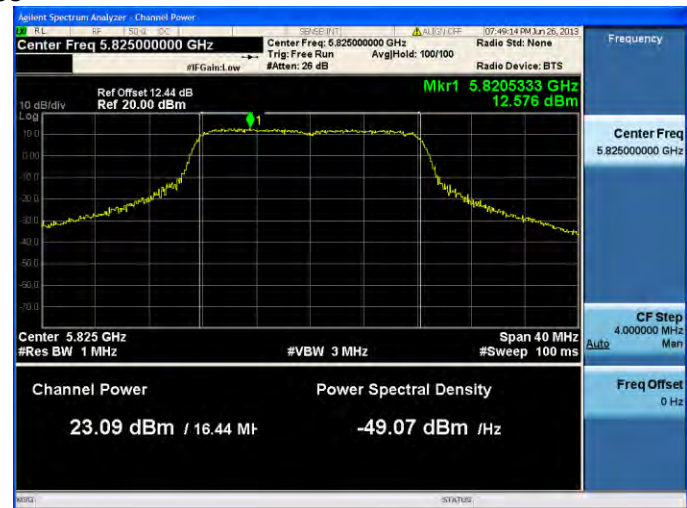

Antenna B



Peak Output Power, 5825 MHz, HT-20, M0 to M7



Antenna A

Peak Output Power, 5825 MHz, HT-20, M0 to M7



Antenna A



Antenna B



Peak Output Power, 5825 MHz, HT-20, M8 to M15




Antenna A



Antenna B

Peak Output Power, 5825 MHz, HT-20 STBC, M0 to M7

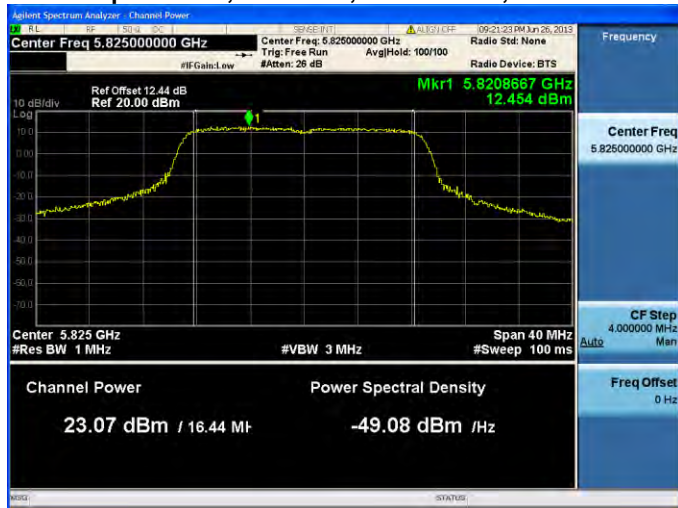

Antenna A



Antenna B



Power Spectral Density

15.247: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Center Frequency:	Frequency from table below
Span:	20 MHz
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	10s
Resolution Bandwidth:	3 kHz
Video Bandwidth:	10 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak Search

Record the Marker value.


The “Measure and add $10 \log(N)$ dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.




Frequency (MHz)	Mode	Data Rate (Mbps)	PSD / Antenna (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	6	-4.4	-1.4	8.0	9.4
	HT-20, M0 to M23	m0	-4.5	-1.5	8.0	9.5
5755	Non HT-40, 6 to 54 Mbps	6	-6	-3.0	8.0	11.0
	HT-40, M0 to M23	m0	-7	-4.0	8.0	12.0
5785	Non HT-20, 6 to 54 Mbps	6	-4.9	-1.9	8.0	9.9
	HT-20, M0 to M23	m0	-5	-2.0	8.0	10.0
5795	Non HT-40, 6 to 54 Mbps	6	-8.1	-5.1	8.0	13.1
	HT-40, M0 to M23	m0	-7.7	-4.7	8.0	12.7
5825	Non HT-20, 6 to 54 Mbps	6	-3.8	-0.8	8.0	8.8
	HT-20, M0 to M23	m0	-3.9	-0.9	8.0	8.9



Power Spectral Density, 5745 MHz, Non HT-20, 6 to 54 Mbps

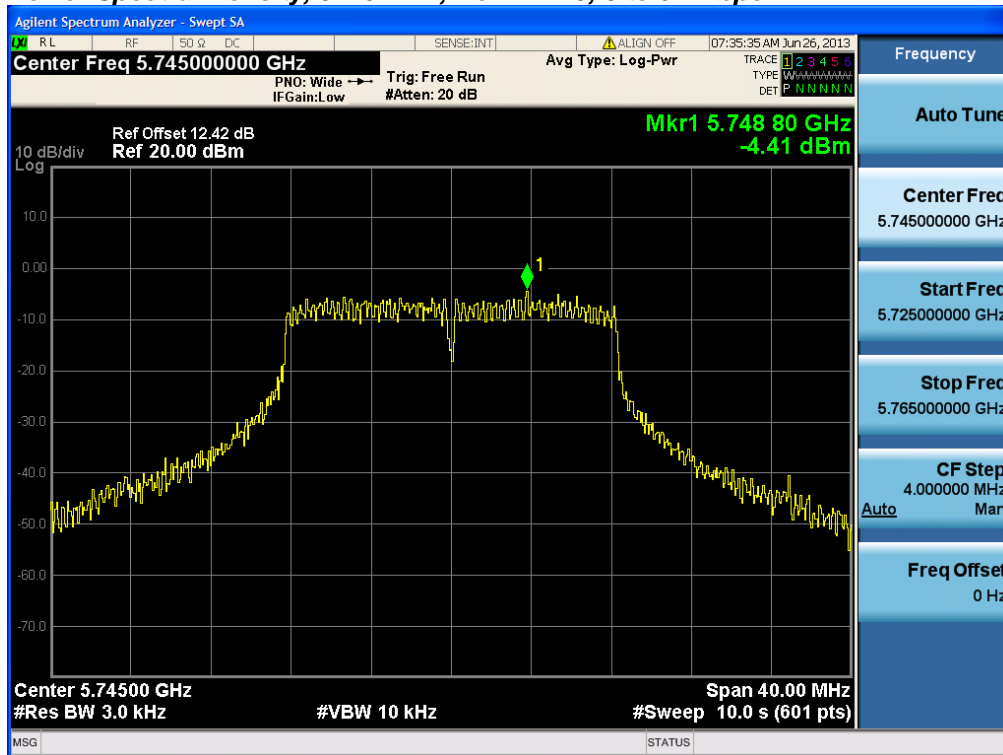


Power Spectral Density, 5745 MHz, HT-20, M0 to M23

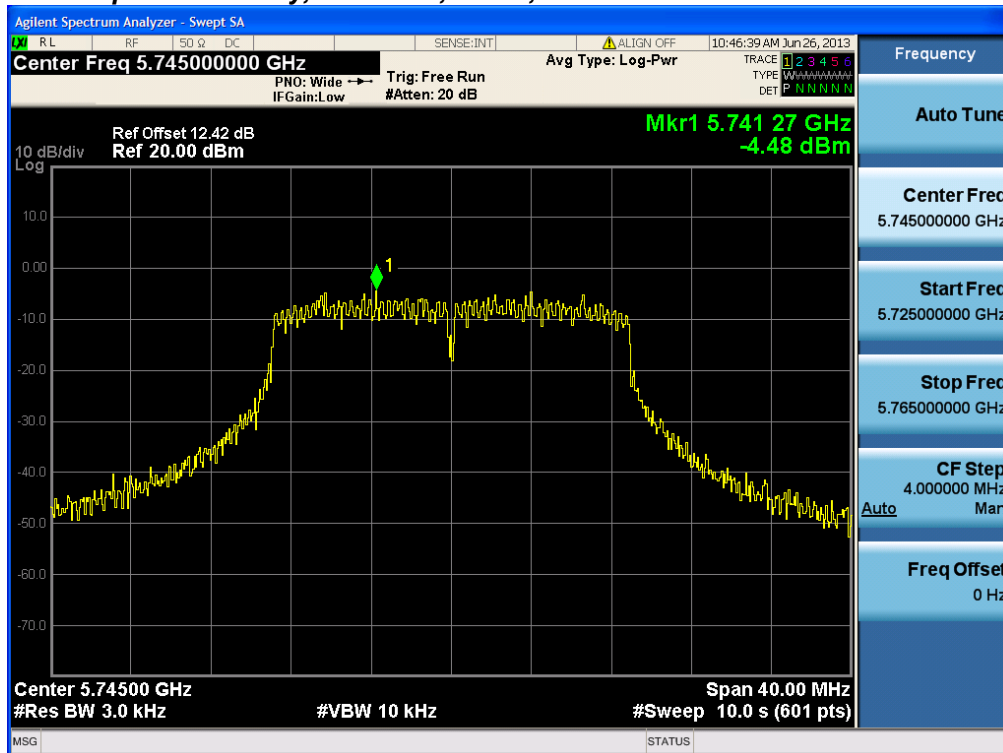




Power Spectral Density, 5755 MHz, Non HT-40, 6 to 54 Mbps

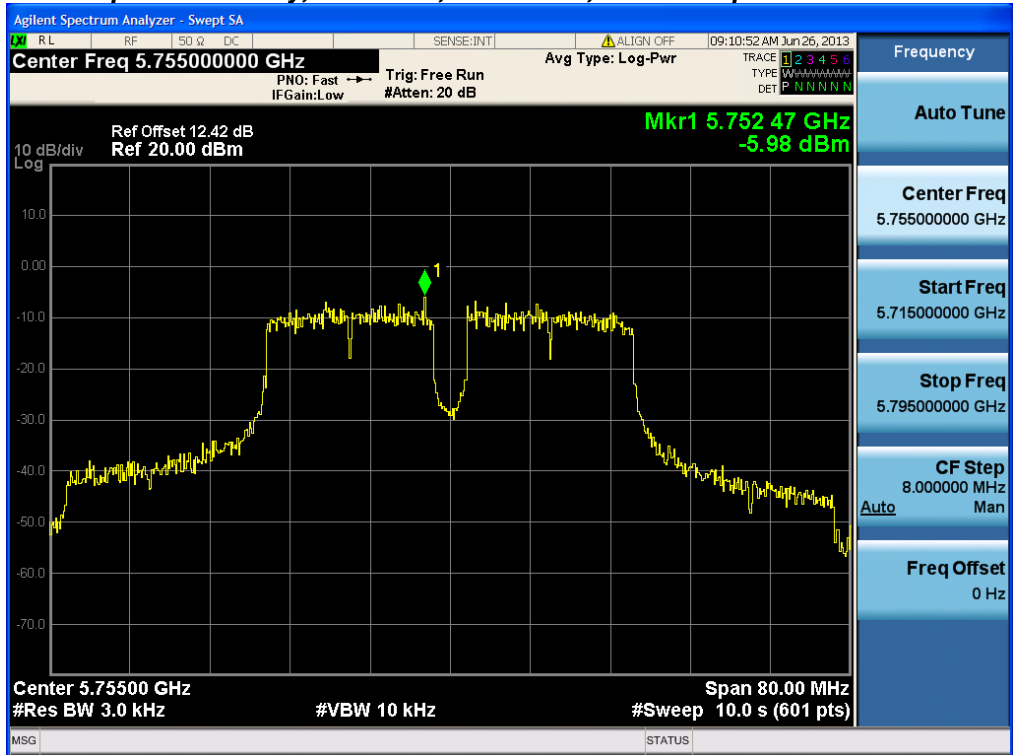


Power Spectral Density, 5755 MHz, HT-40, M0 to M23

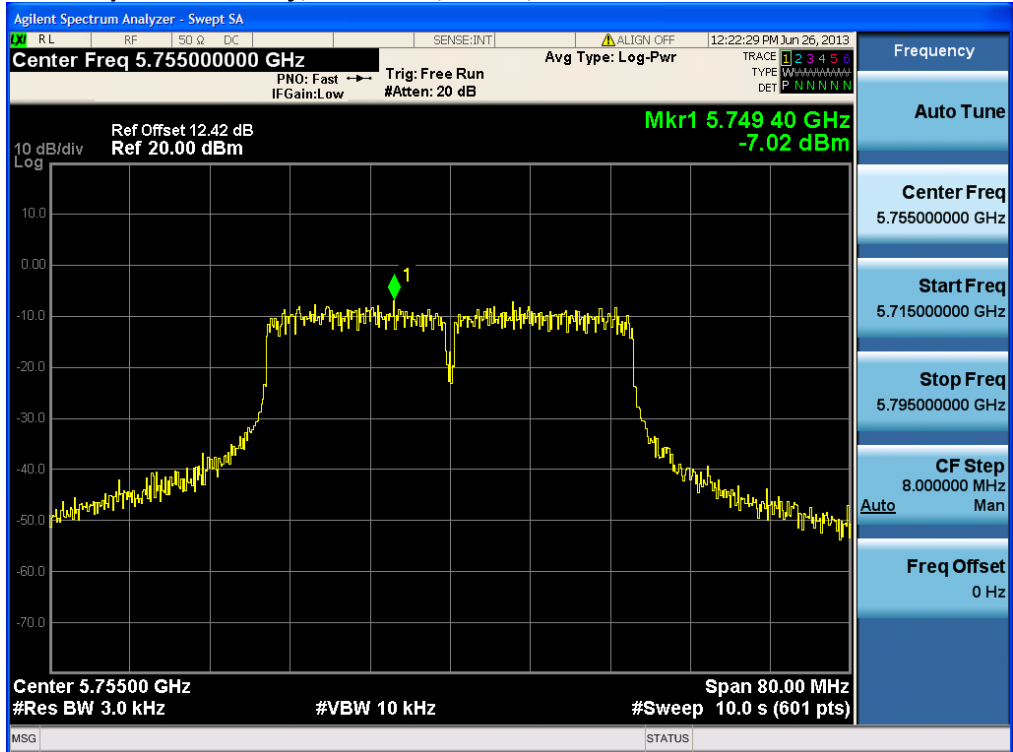




Power Spectral Density, 5785 MHz, Non HT-20, 6 to 54 Mbps

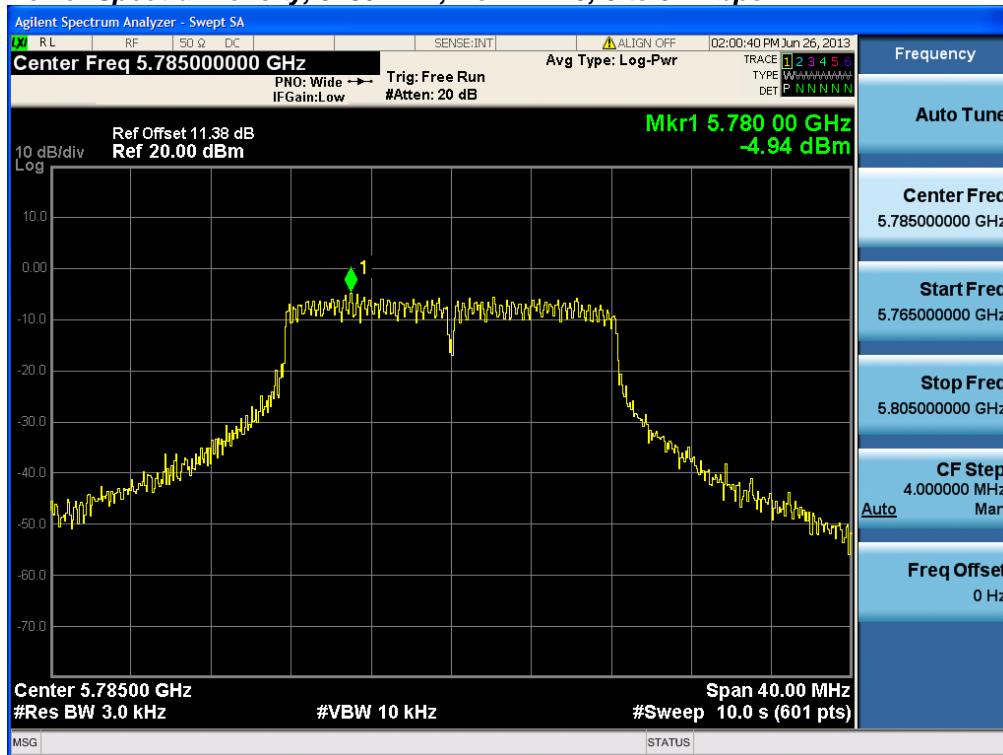


Power Spectral Density, 5785 MHz, HT-20, M0 to M23

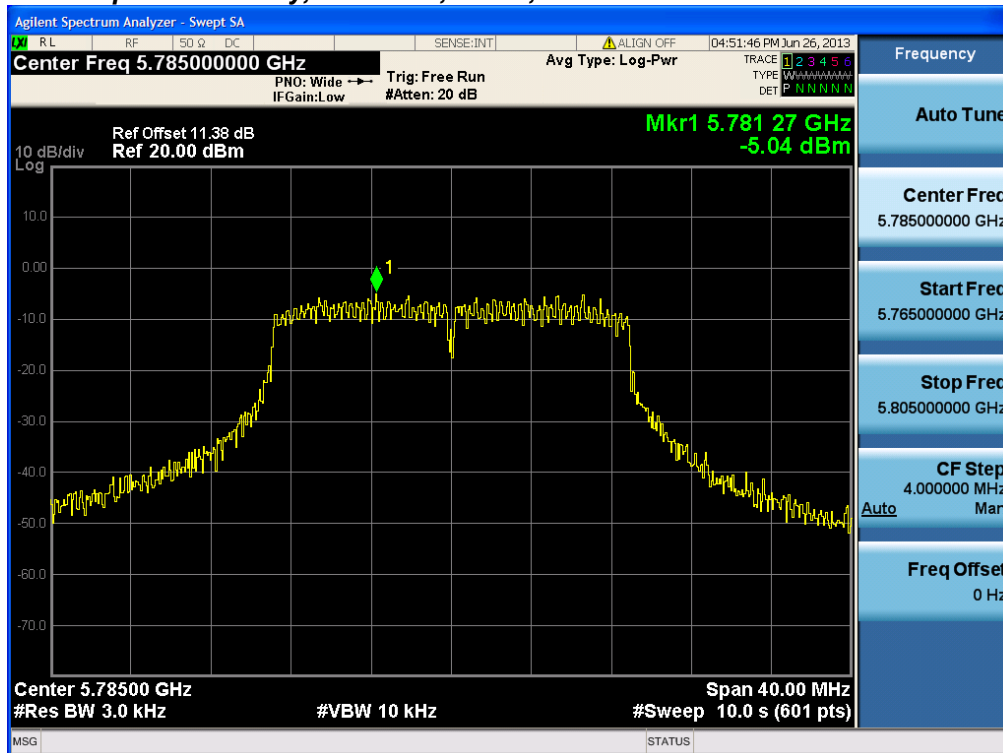




Power Spectral Density, 5795 MHz, Non HT-40, 6 to 54 Mbps

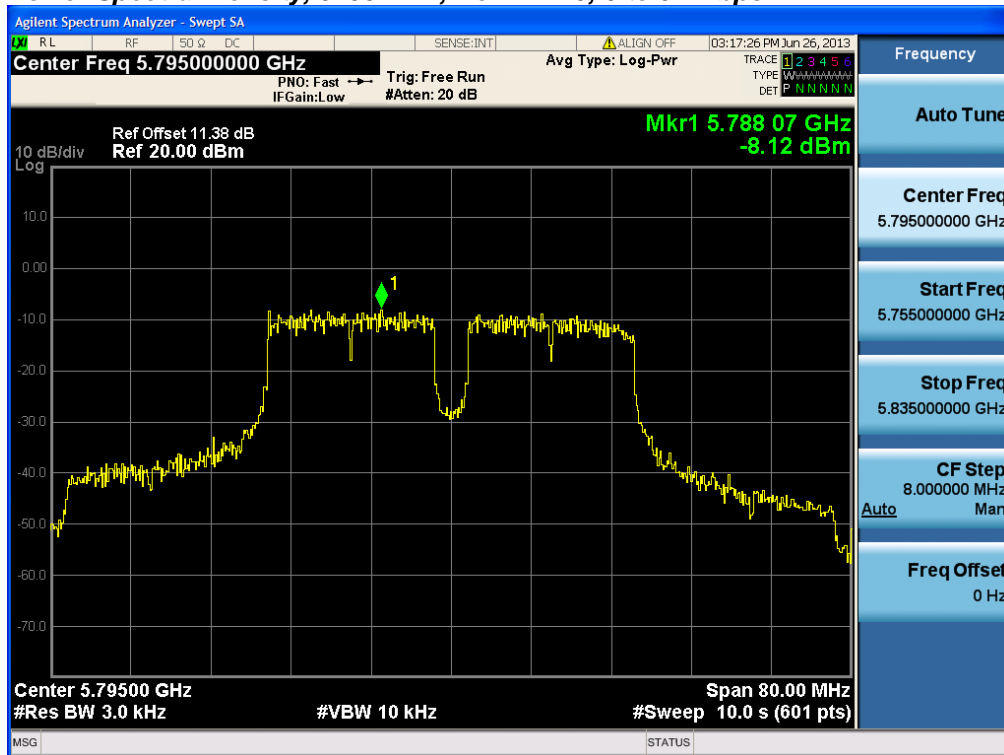


Power Spectral Density, 5795 MHz, HT-40, M0 to M23

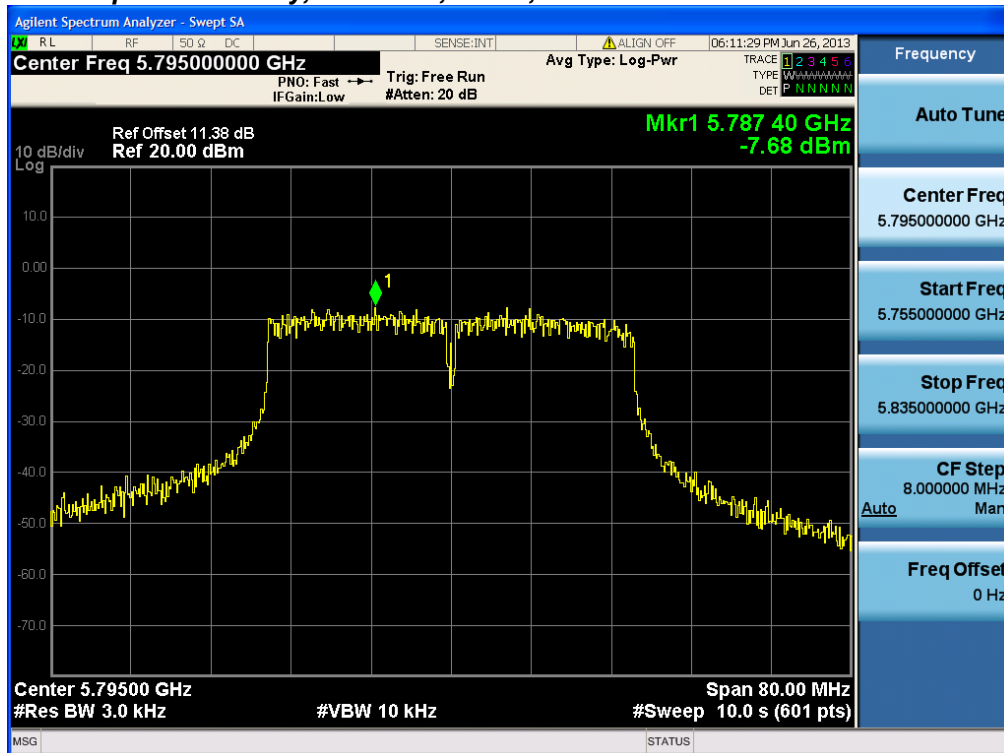




Power Spectral Density, 5825 MHz, Non HT-20, 6 to 54 Mbps

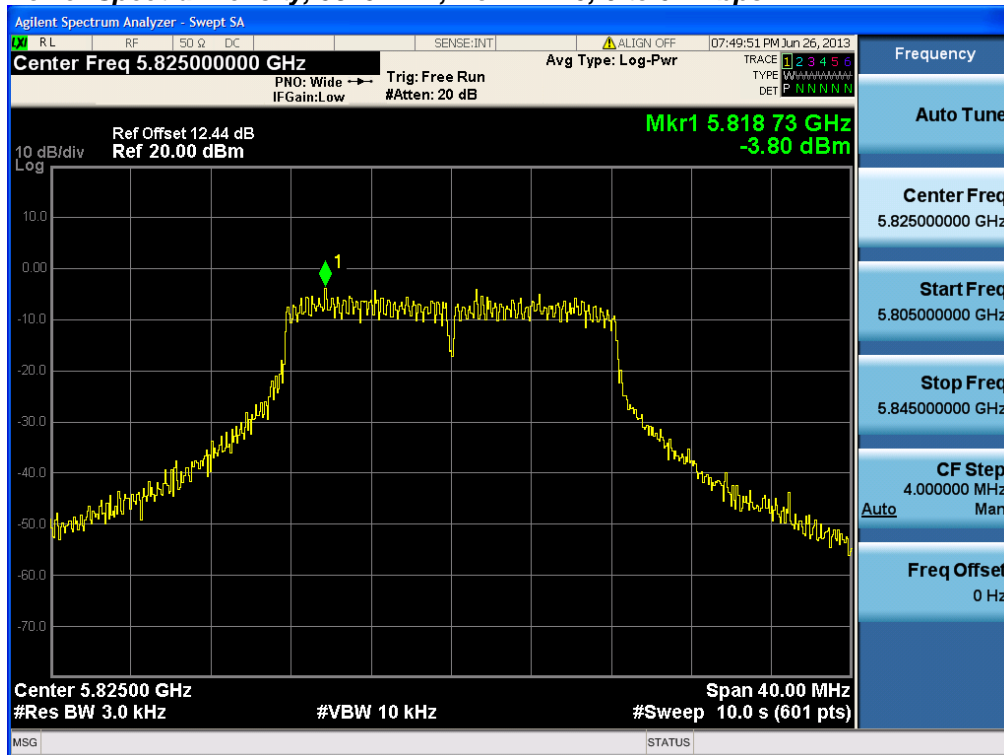

Power Spectral Density, 5825 MHz, HT-20, M0 to M23

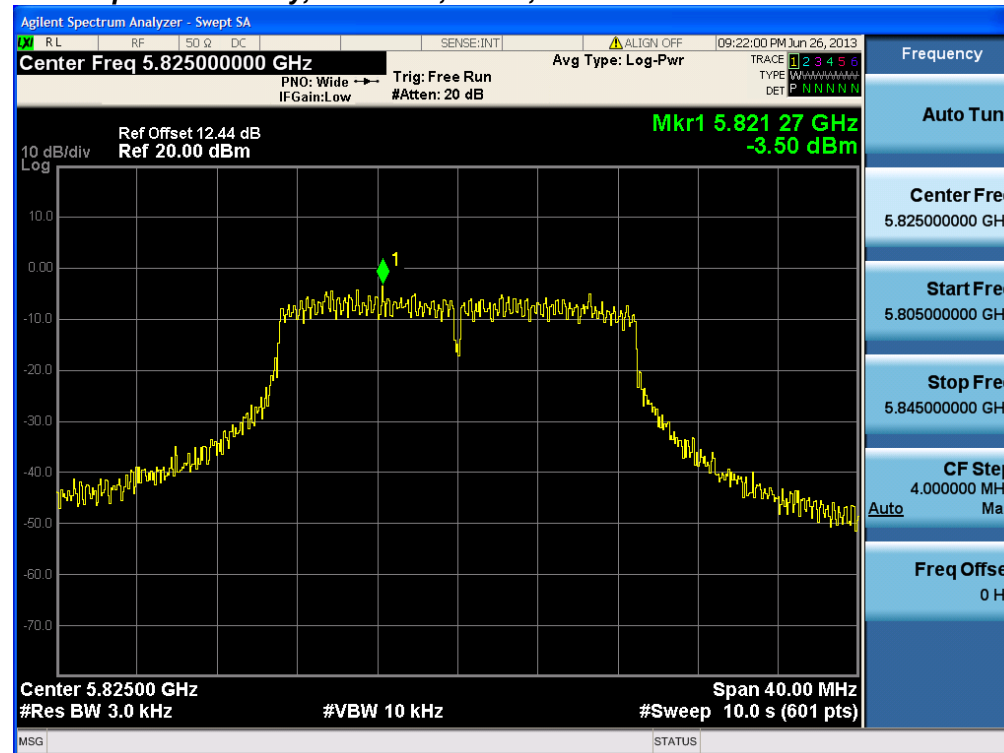



Conducted Spurious Emission

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak

Record the marker waveform peak to spur difference


Out-of-band and spurious emissions tests are performed on each output individually without summing or adding $10 \log(N)$ since the measurements are made relative to the in-band emissions on the individual outputs. The worst case output is recorded.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	5	-56.8		-56.8	-41.25	15.6
	Non HT-20, 6 to 54 Mbps	2	5	-56.8	-56.7	-53.7	-41.25	12.5
	HT-20, M0 to M7	1	5	-56.6		-56.6	-41.25	15.4
	HT-20, M0 to M7	2	5	-56.6	-47.9	-47.4	-41.25	6.1
	HT-20, M8 to M15	2	5	-56.6	-47.9	-47.4	-41.25	6.1
	HT-20 STBC, M0 to M7	2	5	-56.6	-47.9	-47.4	-41.25	6.1
5755	Non HT-40, 6 to 54 Mbps	1	5	-56.8		-56.8	-41.25	15.6
	Non HT-40, 6 to 54 Mbps	2	5	-56.8	-56.6	-53.7	-41.25	12.4
	HT-40, M0 to M7	1	5	-56.8		-56.8	-41.25	15.6
	HT-40, M0 to M7	2	5	-56.8	-56.8	-53.8	-41.25	12.5
	HT-40, M8 to M15	2	5	-56.8	-56.8	-53.8	-41.25	12.5
	HT-40 STBC, M0 to M7	2	5	-56.8	-56.8	-53.8	-41.25	12.5
5785	Non HT-20, 6 to 54 Mbps	1	5	-58.2		-58.2	-41.25	17.0
	Non HT-20, 6 to 54 Mbps	2	5	-58.2	-48.5	-48.1	-41.25	6.8
	HT-20, M0 to M7	1	5	-58.1		-58.1	-41.25	16.9
	HT-20, M0 to M7	2	5	-58.1	-48.7	-48.2	-41.25	7.0
	HT-20, M8 to M15	2	5	-58.1	-48.7	-48.2	-41.25	7.0
	HT-20 STBC, M0 to M7	2	5	-58.1	-48.7	-48.2	-41.25	7.0
5795	Non HT-40, 6 to 54 Mbps	1	5	-58.2		-58.2	-41.25	17.0
	Non HT-40, 6 to 54 Mbps	2	5	-58.2	-48.6	-48.1	-41.25	6.9
	HT-40, M0 to M7	1	5	-58.0		-58.0	-41.25	16.8
	HT-40, M0 to M7	2	5	-58.0	-48.7	-48.2	-41.25	7.0
	HT-40, M8 to M15	2	5	-58.0	-48.7	-48.2	-41.25	7.0
	HT-40 STBC, M0 to M7	2	5	-58.0	-48.7	-48.2	-41.25	7.0
5825	Non HT-20, 6 to 54 Mbps	1	5	-57.1		-57.1	-41.25	15.9
	Non HT-20, 6 to 54 Mbps	2	5	-57.1	-45.6	-45.3	-41.25	4.1
	HT-20, M0 to M7	1	5	-57.1		-57.1	-41.25	15.9
	HT-20, M0 to M7	2	5	-57.1	-45.7	-45.4	-41.25	4.1
	HT-20, M8 to M15	2	5	-57.1	-45.7	-45.4	-41.25	4.1
	HT-20 STBC, M0 to M7	2	5	-57.1	-45.7	-45.4	-41.25	4.1




Conducted Spurs Average, 5745 MHz, Non HT-20, 6 to 54 Mbps

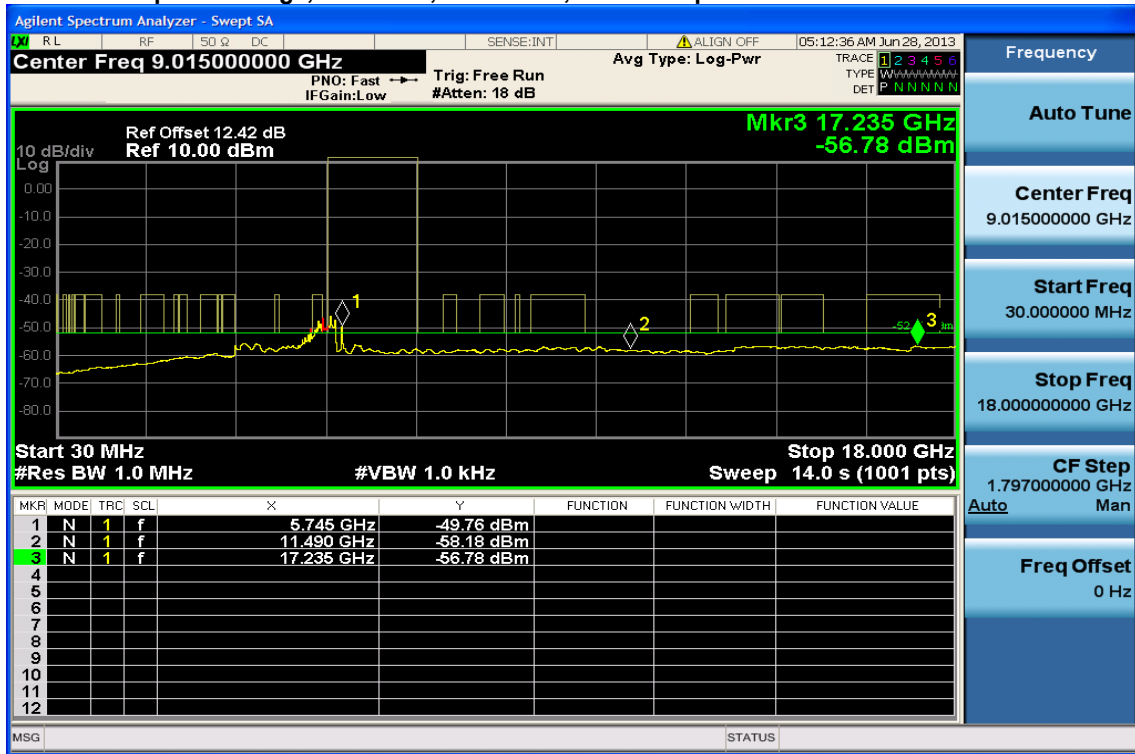

Antenna A



Conducted Spurs Average, 5745 MHz, Non HT-20, 6 to 54 Mbps

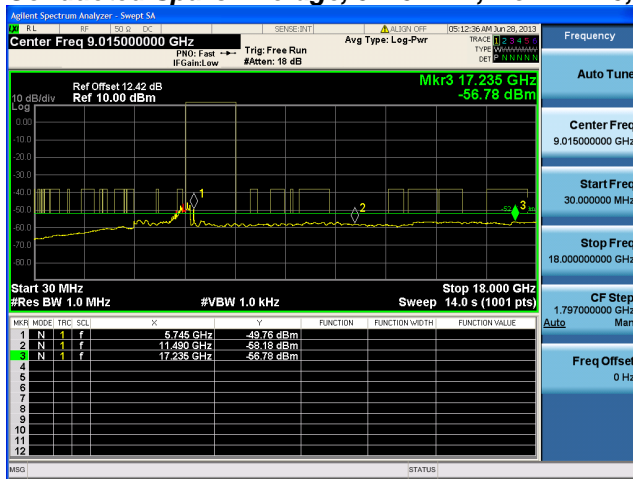

Antenna A



Antenna B

Conducted Spurs Average, 5745 MHz, HT-20, M0 to M7



Antenna A



Conducted Spurs Average, 5745 MHz, HT-20, M0 to M7



Antenna A



Antenna B

Conducted Spurs Average, 5745 MHz, HT-20, M8 to M15




Antenna A



Antenna B



Conducted Spurs Average, 5745 MHz, HT-20 STBC, M0 to M7

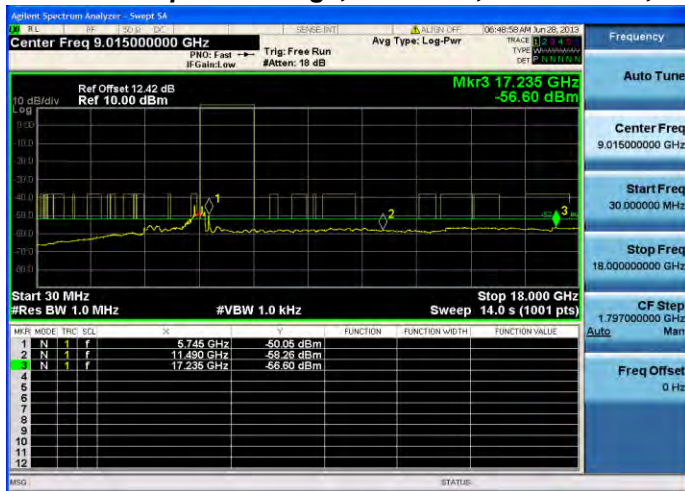

Antenna A



Antenna B



Conducted Spurs Average, 5755 MHz, Non HT-40, 6 to 54 Mbps



Antenna A



Conducted Spurs Average, 5755 MHz, Non HT-40, 6 to 54 Mbps



Antenna A



Antenna B



Conducted Spurs Average, 5755 MHz, HT-40, M0 to M7



Antenna A



Conducted Spurs Average, 5755 MHz, HT-40, M0 to M7



Antenna A



Antenna B



Conducted Spurs Average, 5755 MHz, HT-40, M8 to M15



Antenna A




Antenna B



Conducted Spurs Average, 5755 MHz, HT-40 STBC, M0 to M7



Antenna A

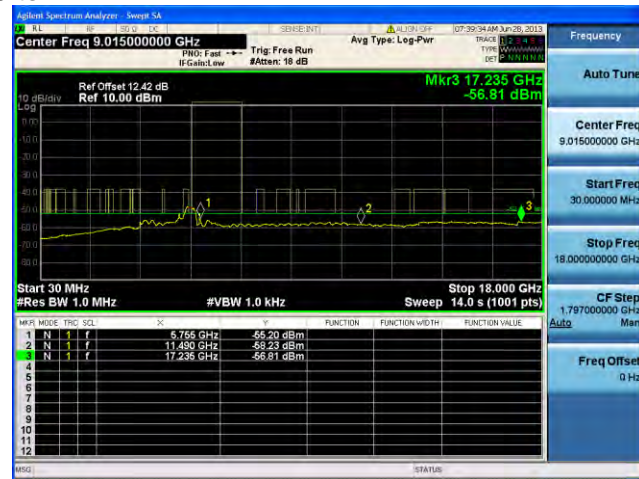

Antenna B



Conducted Spurs Average, 5785 MHz, Non HT-20, 6 to 54 Mbps



Antenna A



Conducted Spurs Average, 5785 MHz, Non HT-20, 6 to 54 Mbps



Antenna A



Antenna B



Conducted Spurs Average, 5785 MHz, HT-20, M0 to M7



Antenna A



Conducted Spurs Average, 5785 MHz, HT-20, M0 to M7



Antenna A



Antenna B



Conducted Spurs Average, 5785 MHz, HT-20, M8 to M15



Antenna A



Antenna B



Conducted Spurs Average, 5785 MHz, HT-20 STBC, M0 to M7



Antenna A



Antenna B



Conducted Spurs Average, 5795 MHz, Non HT-40, 6 to 54 Mbps



Antenna A



Conducted Spurs Average, 5795 MHz, Non HT-40, 6 to 54 Mbps



Antenna A



Antenna B



Conducted Spurs Average, 5795 MHz, HT-40, M0 to M7



Antenna A



Conducted Spurs Average, 5795 MHz, HT-40, M0 to M7



Antenna A



Antenna B



Conducted Spurs Average, 5795 MHz, HT-40, M8 to M15



Antenna A



Antenna B



Conducted Spurs Average, 5795 MHz, HT-40 STBC, M0 to M7



Antenna A



Antenna B



Conducted Spurs Average, 5825 MHz, Non HT-20, 6 to 54 Mbps



Antenna A



Conducted Spurs Average, 5825 MHz, Non HT-20, 6 to 54 Mbps



Antenna A



Antenna B



Conducted Spurs Average, 5825 MHz, HT-20, M0 to M7



Antenna A



Conducted Spurs Average, 5825 MHz, HT-20, M0 to M7



Antenna A



Antenna B



Conducted Spurs Average, 5825 MHz, HT-20, M8 to M15



Antenna A



Antenna B



Conducted Spurs Average, 5825 MHz, HT-20 STBC, M0 to M7




Antenna A



Antenna B




Conducted Spurs Peak, 5745 MHz, Non HT-20, 6 to 54 Mbps

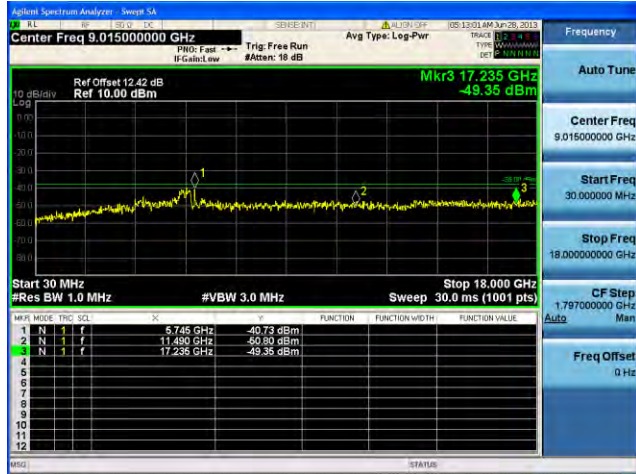


Antenna A



Conducted Spurs Peak, 5745 MHz, Non HT-20, 6 to 54 Mbps

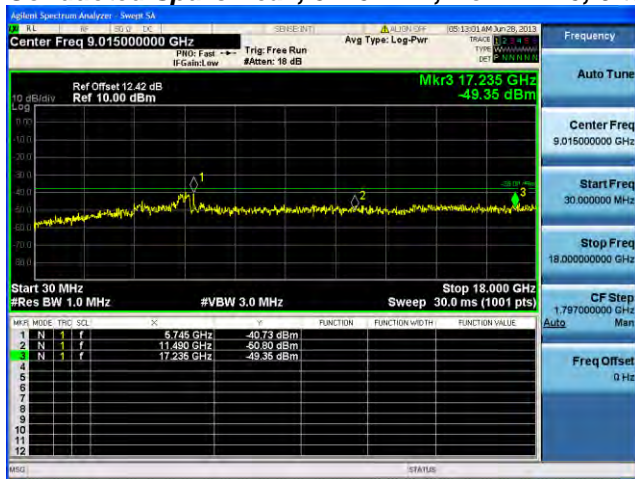

Antenna A

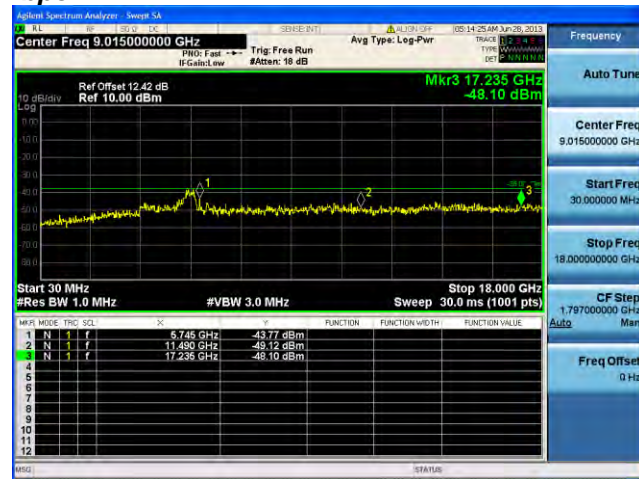

Antenna B




Conducted Spurs Peak, 5745 MHz, HT-20, M0 to M7




Antenna A



Conducted Spurs Peak, 5745 MHz, HT-20, M0 to M7

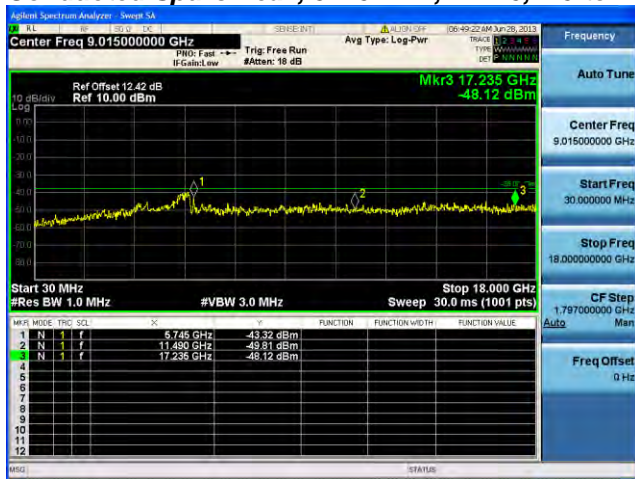

Antenna A

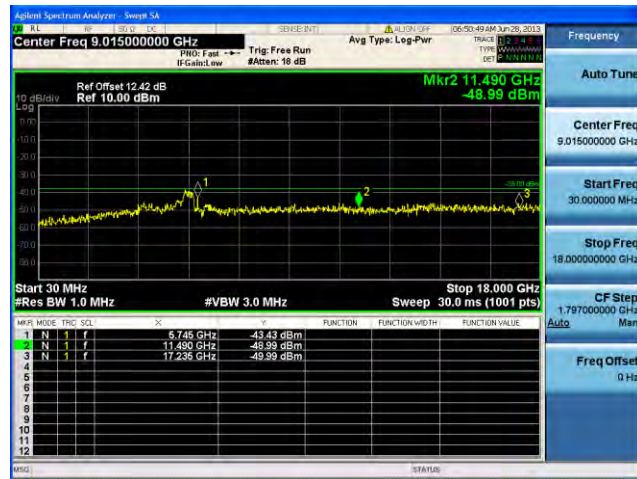


Antenna B



Conducted Spurs Peak, 5745 MHz, HT-20, M8 to M15



Antenna A

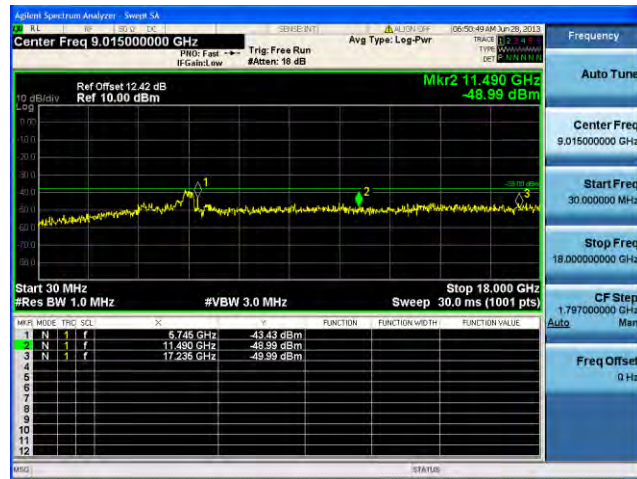


Antenna B



Conducted Spurs Peak, 5745 MHz, HT-20 STBC, M0 to M7



Antenna A

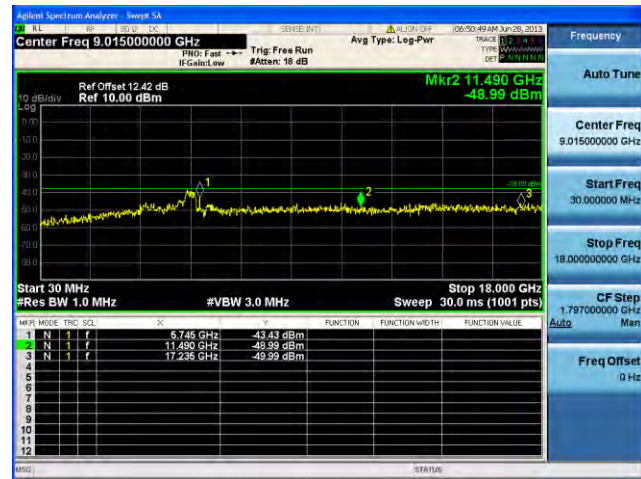

Antenna B



Conducted Spurs Peak, 5755 MHz, Non HT-40, 6 to 54 Mbps




Antenna A



Conducted Spurs Peak, 5755 MHz, Non HT-40, 6 to 54 Mbps




Antenna A

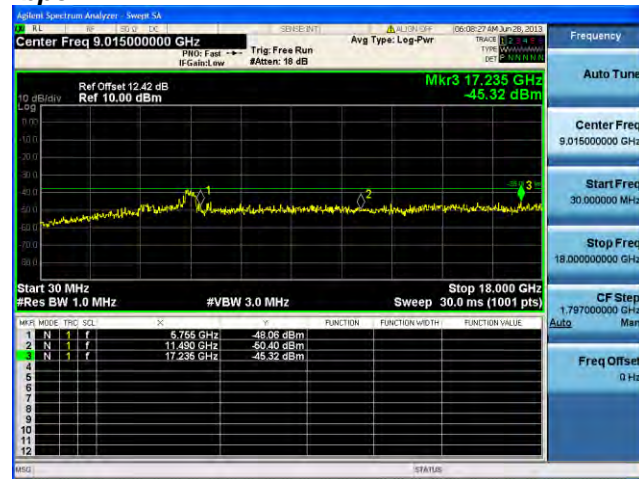

Antenna B




Conducted Spurs Peak, 5755 MHz, HT-40, M0 to M7

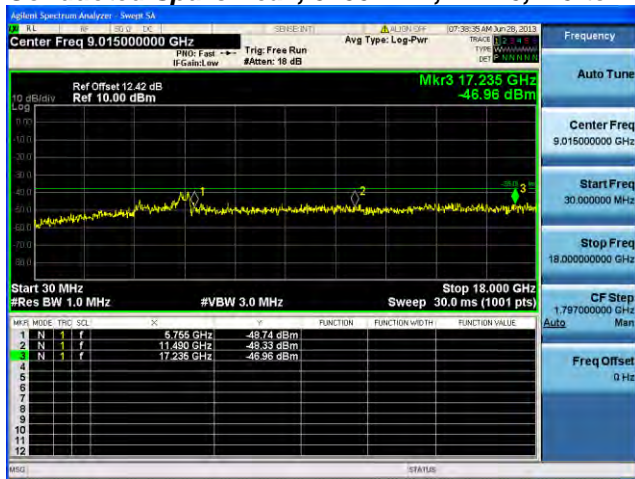

Antenna A



Conducted Spurs Peak, 5755 MHz, HT-40, M0 to M7

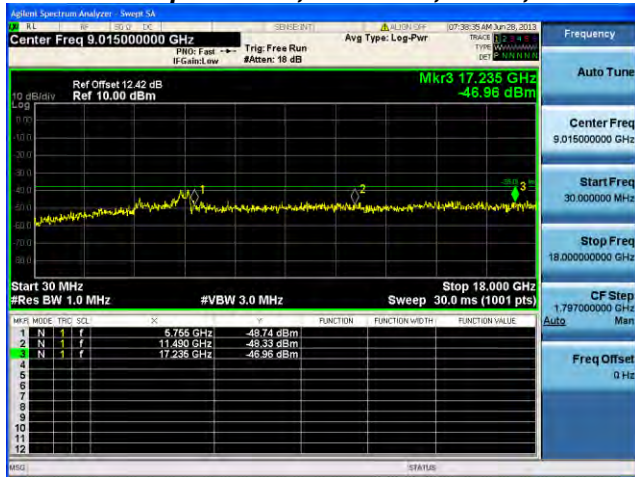


Antenna A




Antenna B



Conducted Spurs Peak, 5755 MHz, HT-40, M8 to M15

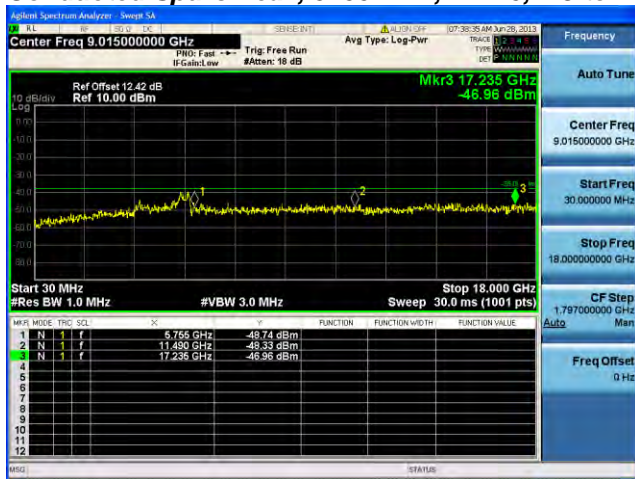


Antenna A

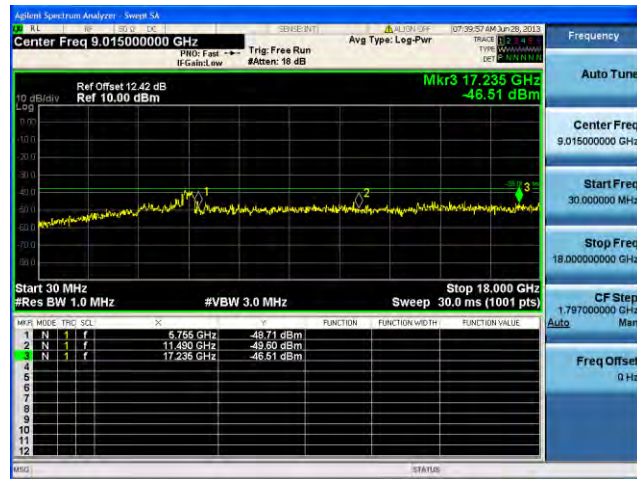


Antenna B



Conducted Spurs Peak, 5755 MHz, HT-40 STBC, M0 to M7

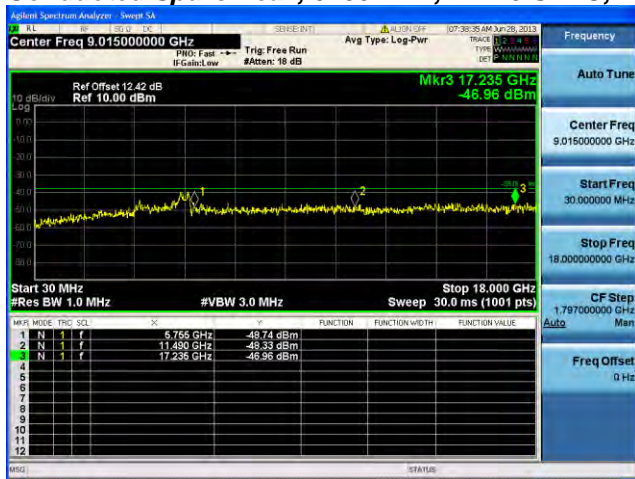

Antenna A

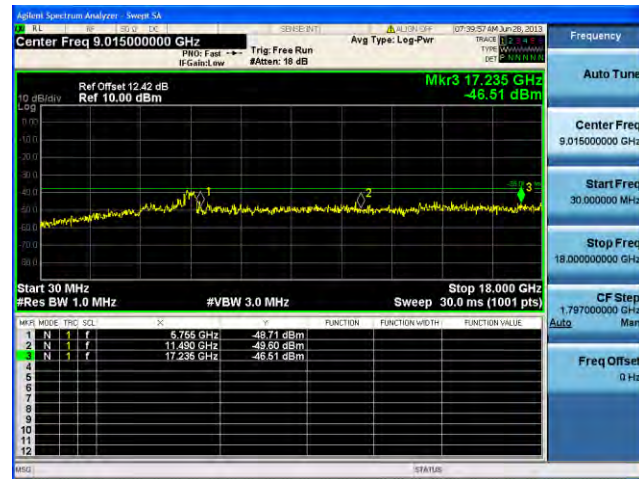

Antenna B




Conducted Spurs Peak, 5785 MHz, Non HT-20, 6 to 54 Mbps




Antenna A



Conducted Spurs Peak, 5785 MHz, Non HT-20, 6 to 54 Mbps

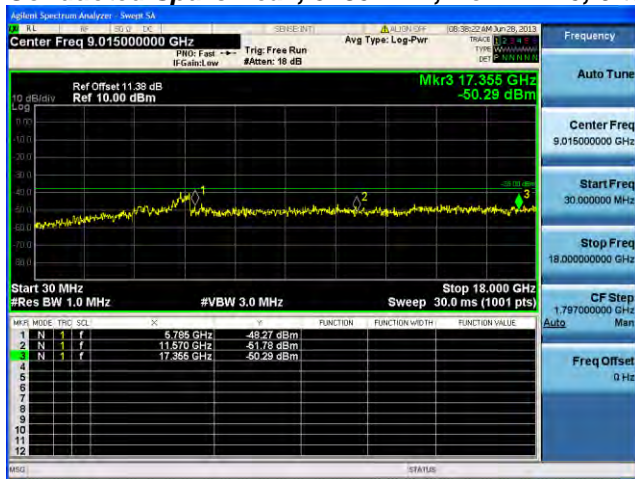

Antenna A

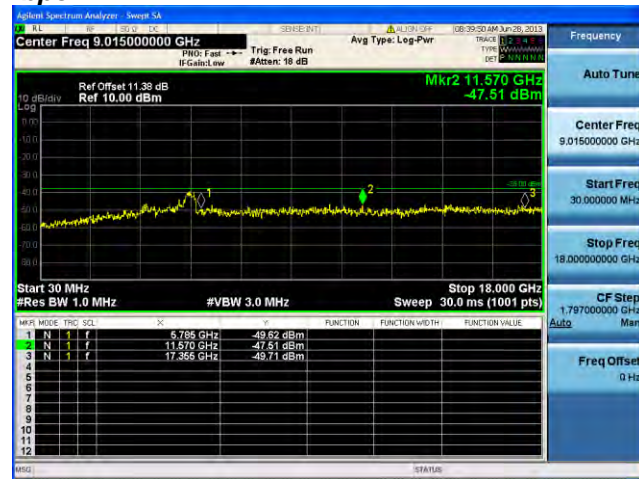

Antenna B




Conducted Spurs Peak, 5785 MHz, HT-20, M0 to M7




Antenna A



Conducted Spurs Peak, 5785 MHz, HT-20, M0 to M7

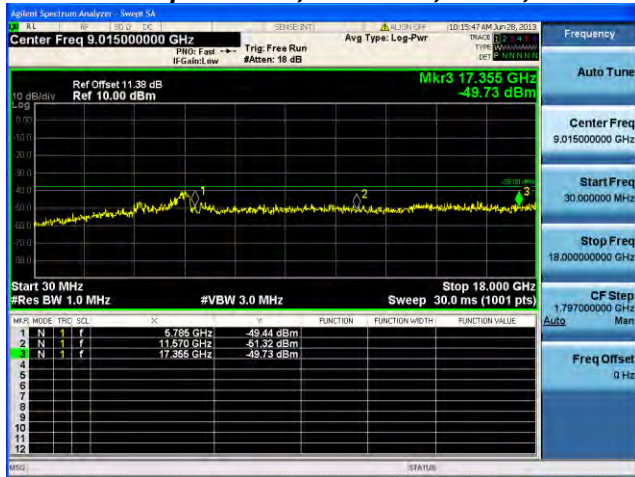

Antenna A

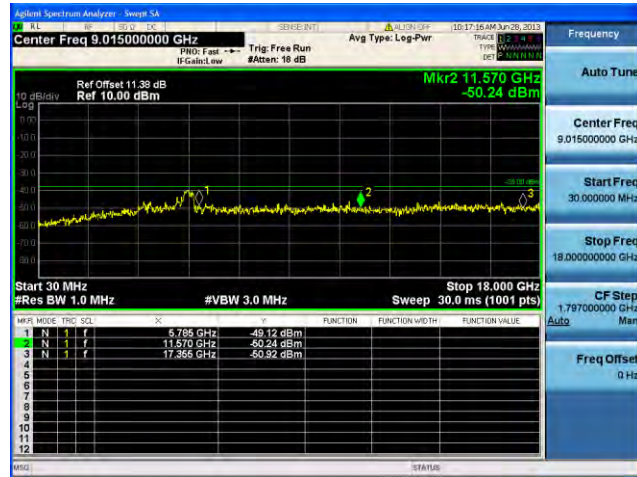


Antenna B



Conducted Spurs Peak, 5785 MHz, HT-20, M8 to M15




Antenna A

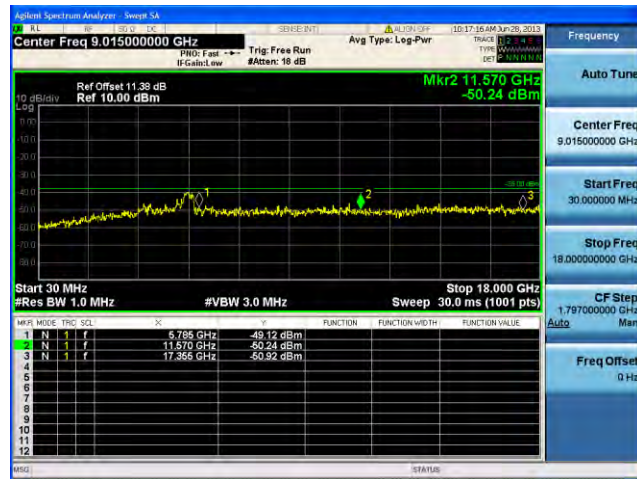


Antenna B



Conducted Spurs Peak, 5785 MHz, HT-20 STBC, M0 to M7

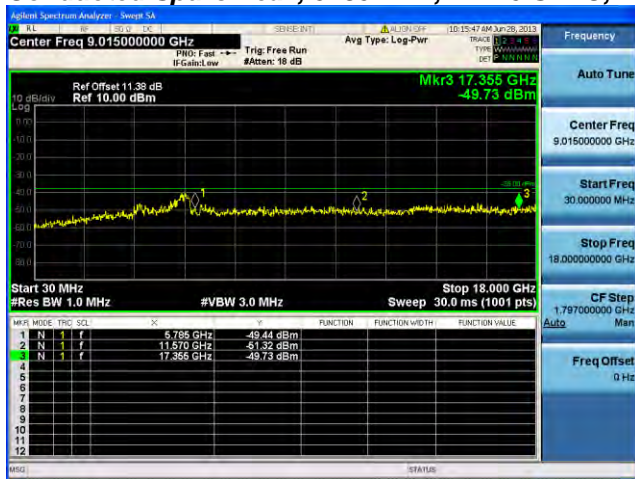

Antenna A

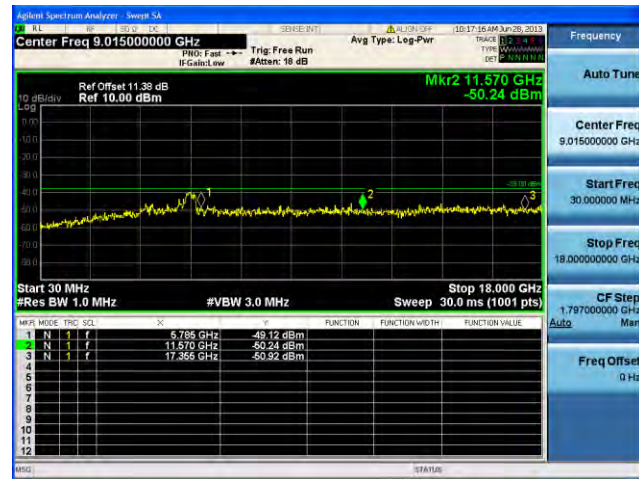

Antenna B



Conducted Spurs Peak, 5795 MHz, Non HT-40, 6 to 54 Mbps




Antenna A



Conducted Spurs Peak, 5795 MHz, Non HT-40, 6 to 54 Mbps



Antenna A

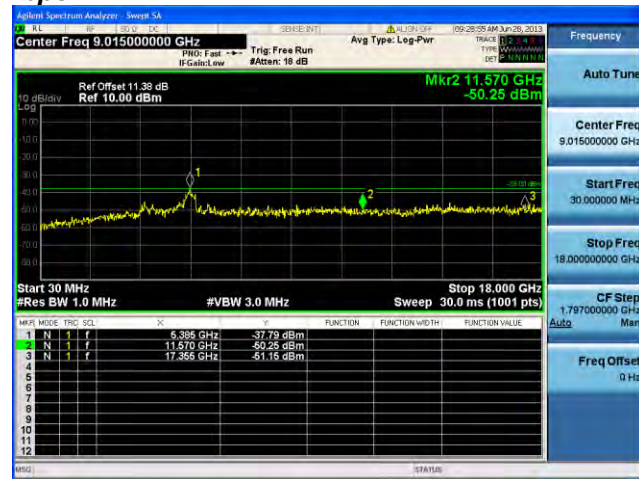

Antenna B




Conducted Spurs Peak, 5795 MHz, HT-40, M0 to M7




Antenna A



Conducted Spurs Peak, 5795 MHz, HT-40, M0 to M7

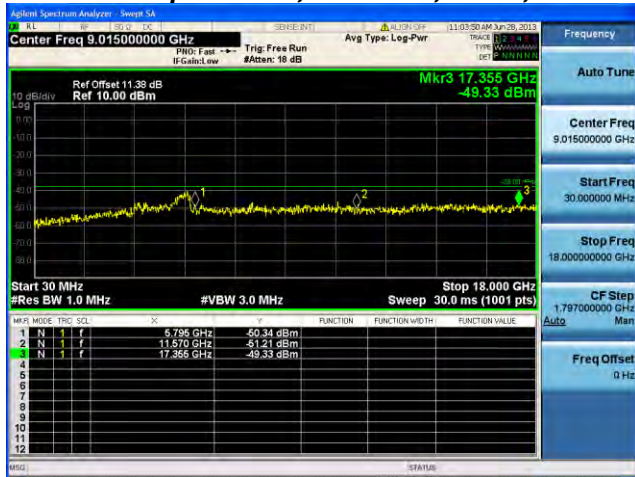

Antenna A

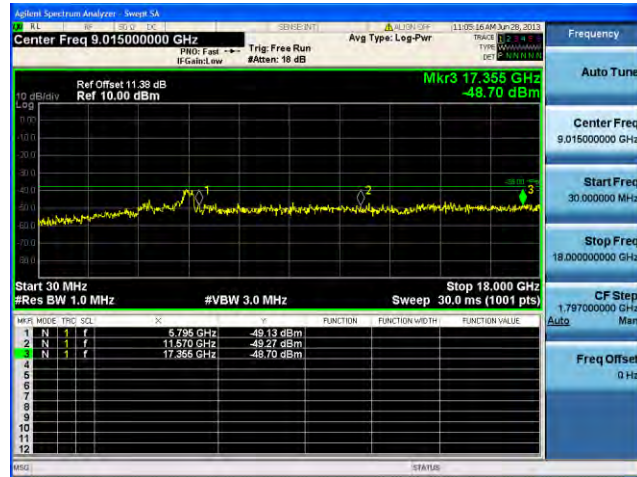


Antenna B



Conducted Spurs Peak, 5795 MHz, HT-40, M8 to M15



Antenna A

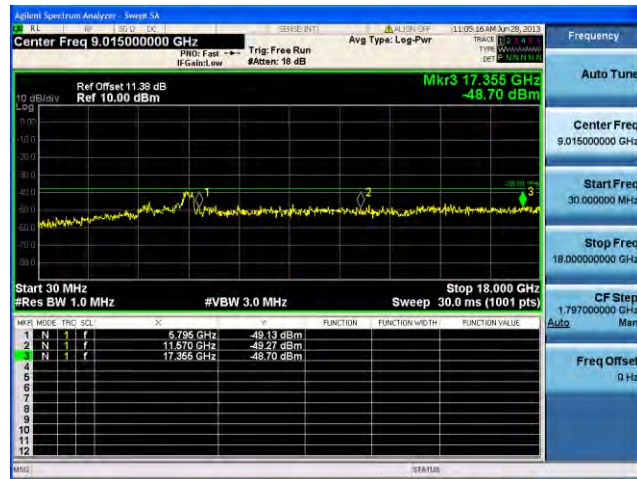


Antenna B



Conducted Spurs Peak, 5795 MHz, HT-40 STBC, M0 to M7



Antenna A

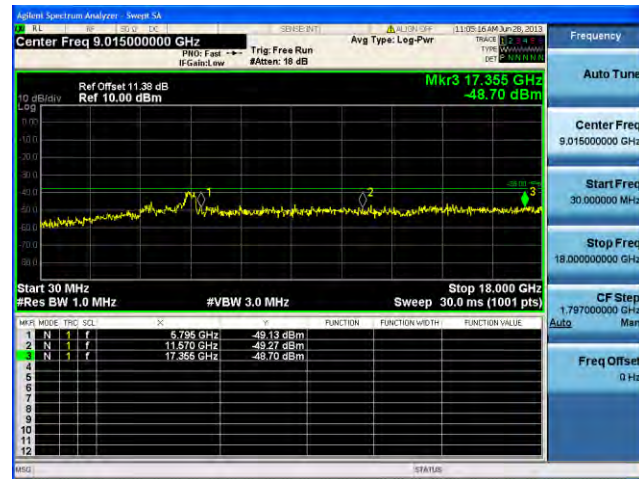

Antenna B



Conducted Spurs Peak, 5825 MHz, Non HT-20, 6 to 54 Mbps




Antenna A



Conducted Spurs Peak, 5825 MHz, Non HT-20, 6 to 54 Mbps




Antenna A

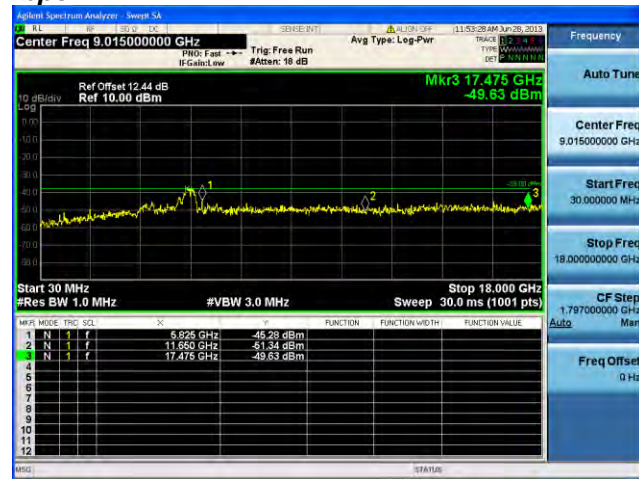

Antenna B




Conducted Spurs Peak, 5825 MHz, HT-20, M0 to M7

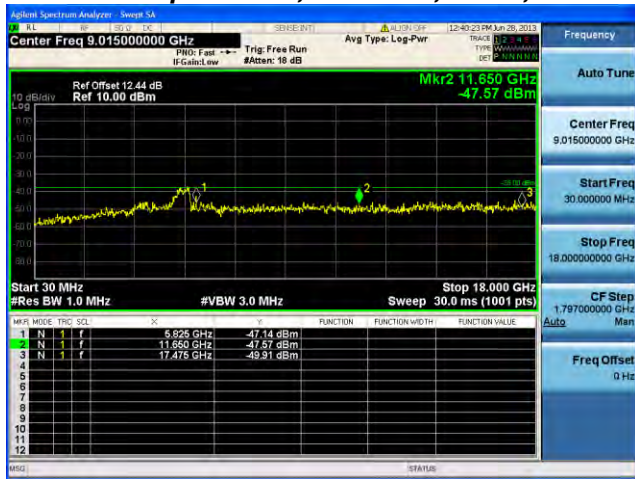

Antenna A



Conducted Spurs Peak, 5825 MHz, HT-20, M0 to M7

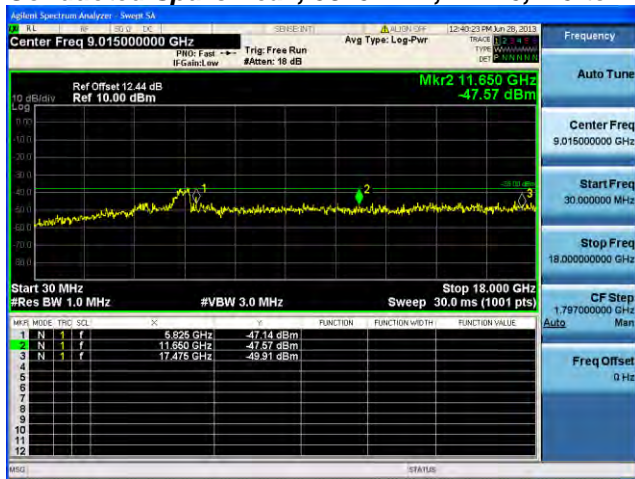


Antenna A



Antenna B



Conducted Spurs Peak, 5825 MHz, HT-20, M8 to M15

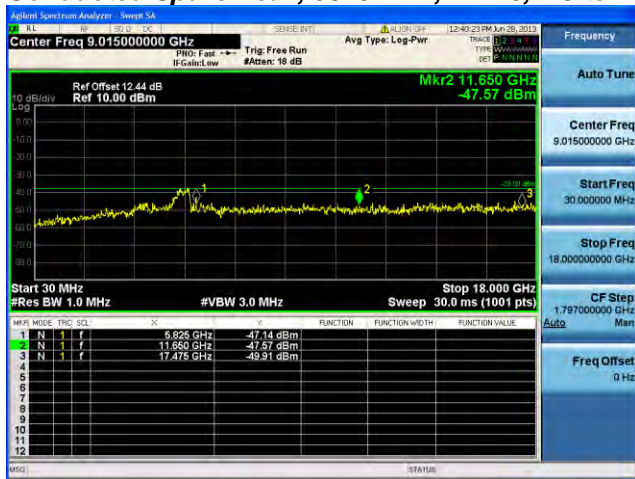


Antenna A



Antenna B



Conducted Spurs Peak, 5825 MHz, HT-20 STBC, M0 to M7

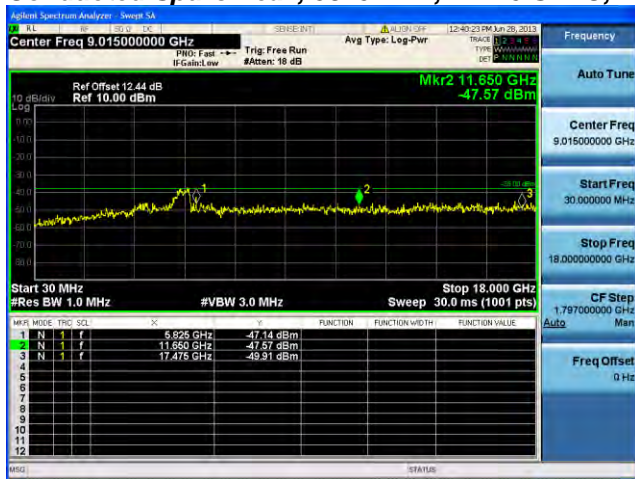

Antenna A



Antenna B



Conducted Bandedge

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak

Record the marker waveform peak to spur difference

Out-of-band and spurious emissions tests are performed on each output individually without summing or adding $10 \log(N)$ since the measurements are made relative to the in-band emissions on the individual outputs. The worst case output is recorded.




Frequency (MHz)	Mode	Tx Paths	Conducted Bandedge Delta (dB)	Limit (dB c)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	6	41.6	>30	11.6
	HT-20, M0 to M23	m0	40.1	>30	10.1
5755	Non HT-40, 6 to 54 Mbps	6	33.5	>30	3.5
	HT-40, M0 to M23	m0	34.7	>30	4.7
5795	Non HT-40, 6 to 54 Mbps	6	46.6	>30	16.6
	HT-40, M0 to M23	m0	51.9	>30	21.9
5825	Non HT-20, 6 to 54 Mbps	6	46.9	>30	16.9
	HT-20, M0 to M23	m0	49.4	>30	19.4



Conducted Bandedge Average, 5745 MHz, Non HT-20, 6 to 54 Mbps



Conducted Bandedge Average, 5745 MHz, HT-20, M0 to M23

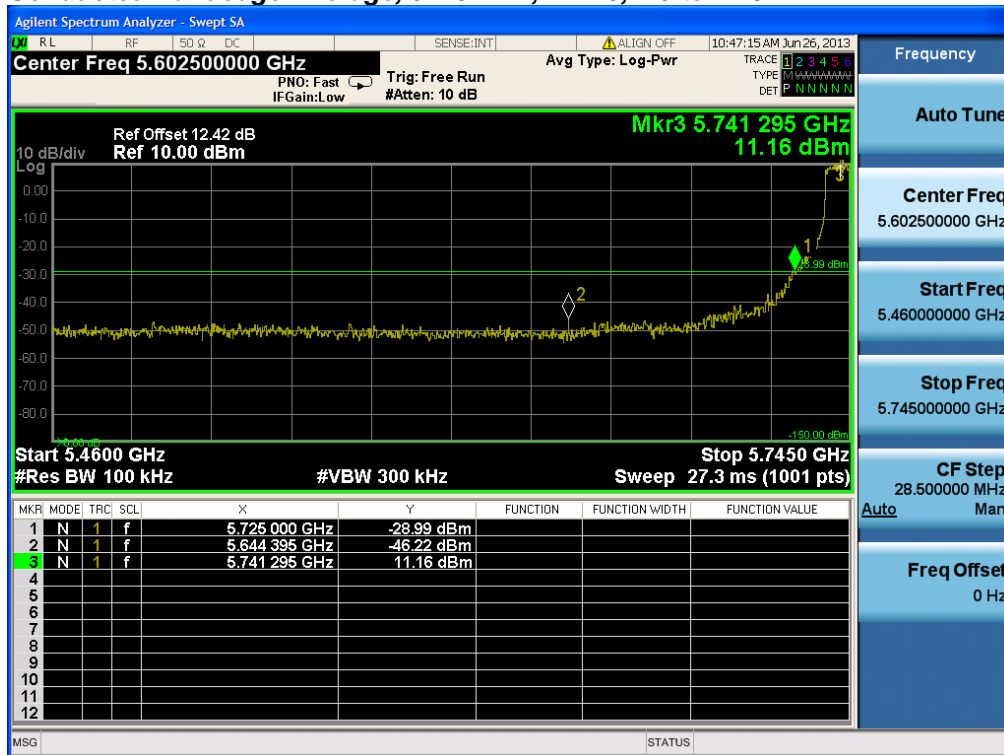




Conducted Bandedge Average, 5755 MHz, Non HT-40, 6 to 54 Mbps




Conducted Bandedge Average, 5755 MHz, HT-40, M0 to M23

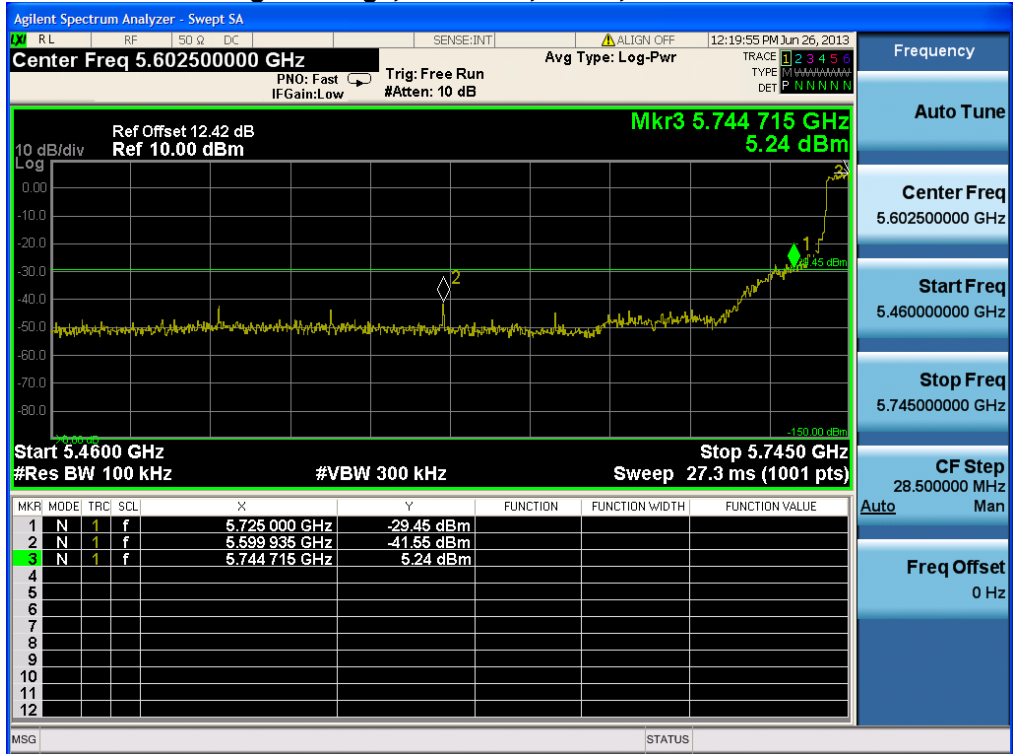




Conducted Bandedge Average, 5795 MHz, Non HT-40, 6 to 54 Mbps

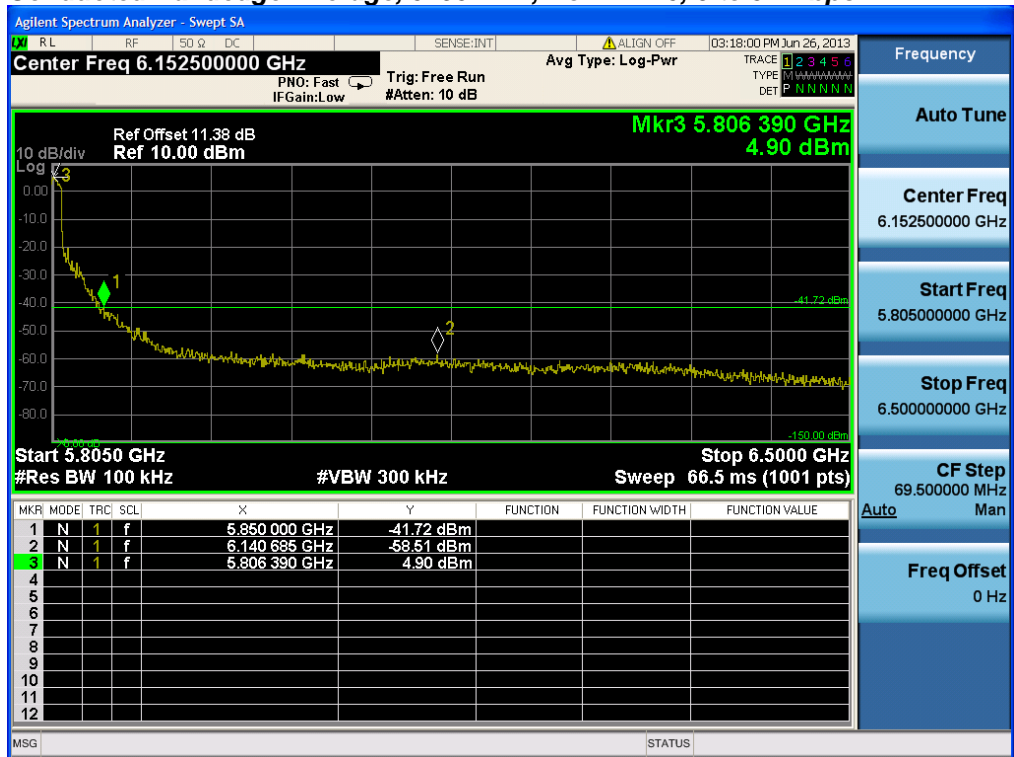

Conducted Bandedge Average, 5795 MHz, HT-40, M0 to M23

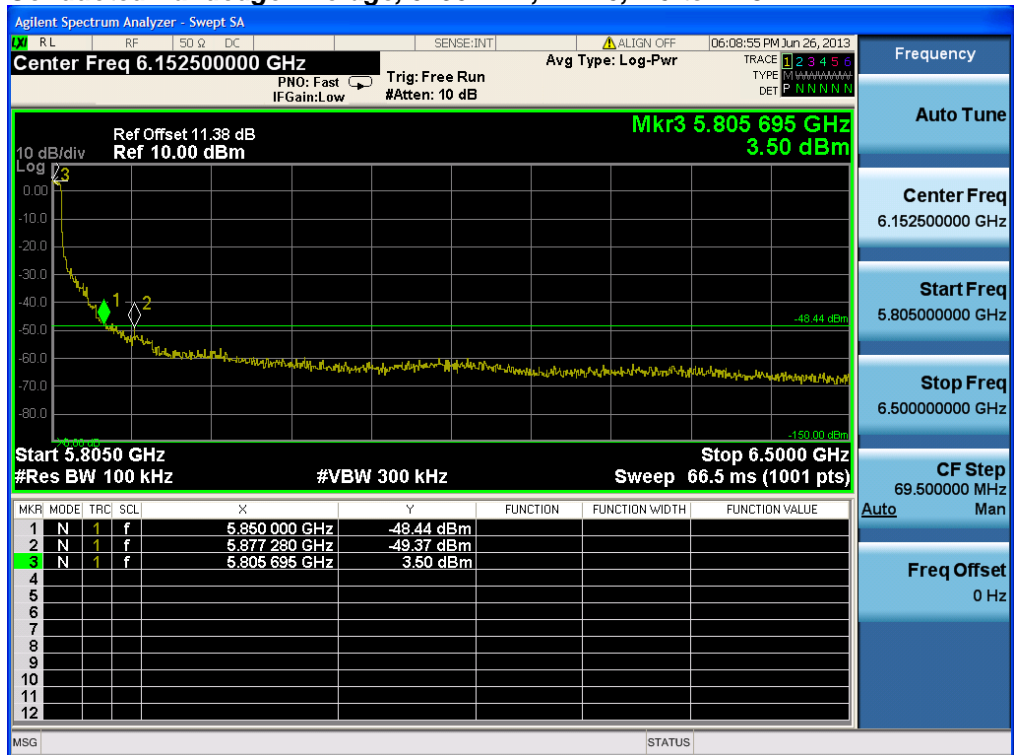




Conducted Bandedge Average, 5825 MHz, Non HT-20, 6 to 54 Mbps



Conducted Bandedge Average, 5825 MHz, HT-20, M0 to M23

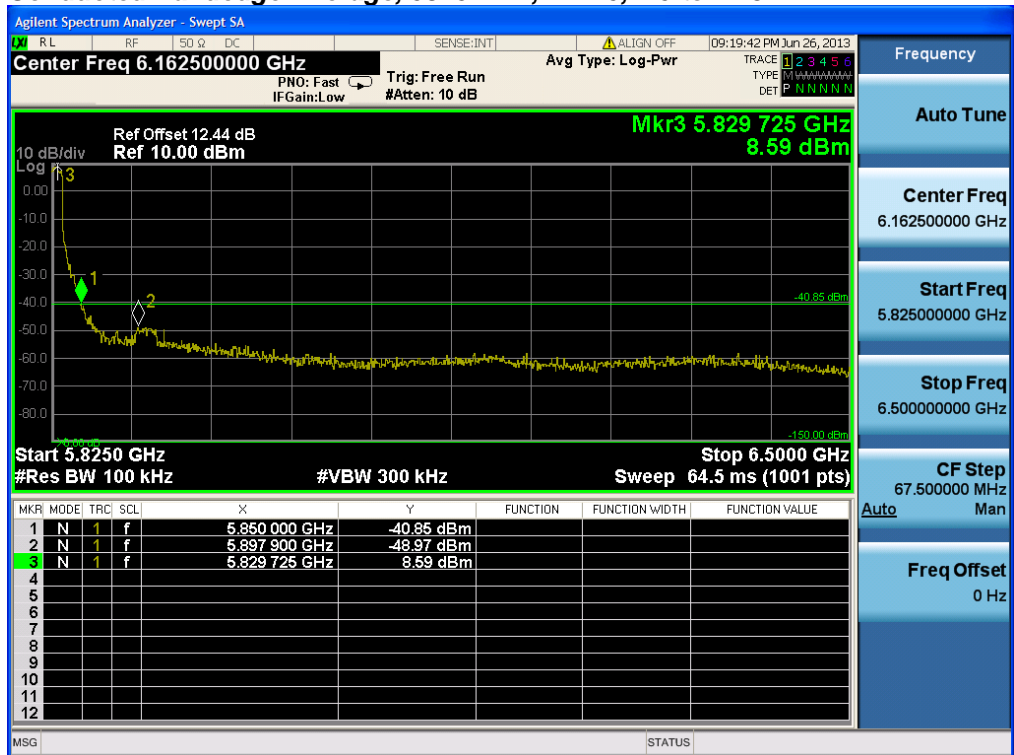



Title: Conducted Test Setup



Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Spurious Emissions

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 10 Hz for average
Detector:	Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas.
There are no measurable emissions above 18 GHz.




Transmitter Radiated Spurious Emissions

Radiated Transmitter Spurs, All Rates, All Modes, Average 1-18 GHz



Radiated Transmitter Spurs, All Rates, All Modes, Peak 1-18 GHz

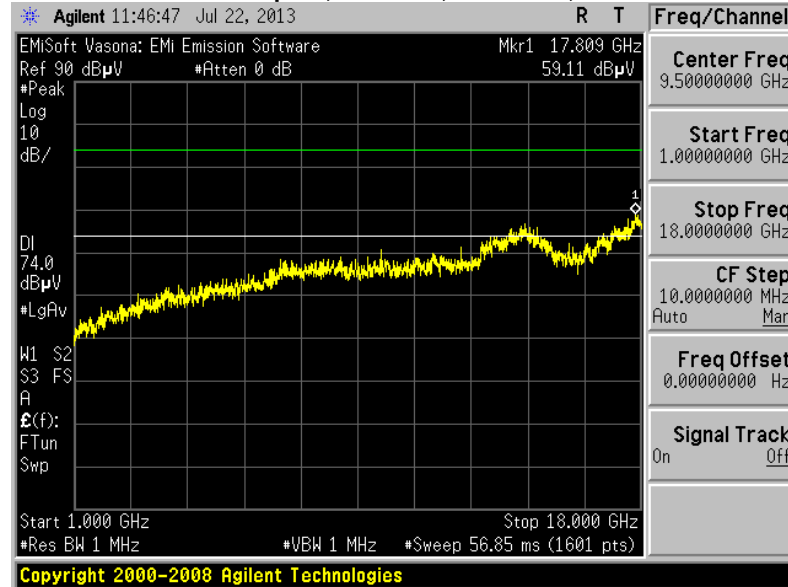




Radiated Transmitter Spurs, All Rates, All Modes, Average 18-26.5 GHz



Radiated Transmitter Spurs, All Rates, All Modes, Peak 18-26.5 GHz

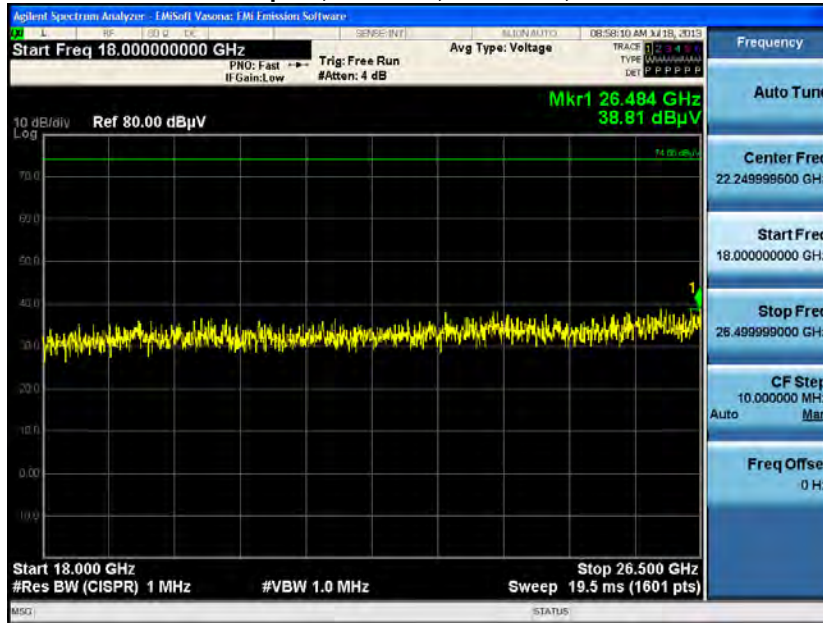




Radiated Transmitter Spurs, All Rates, All Modes, Average 26.5-40 GHz



Radiated Transmitter Spurs, All Rates, All Modes, Peak 18-26.5 GHz

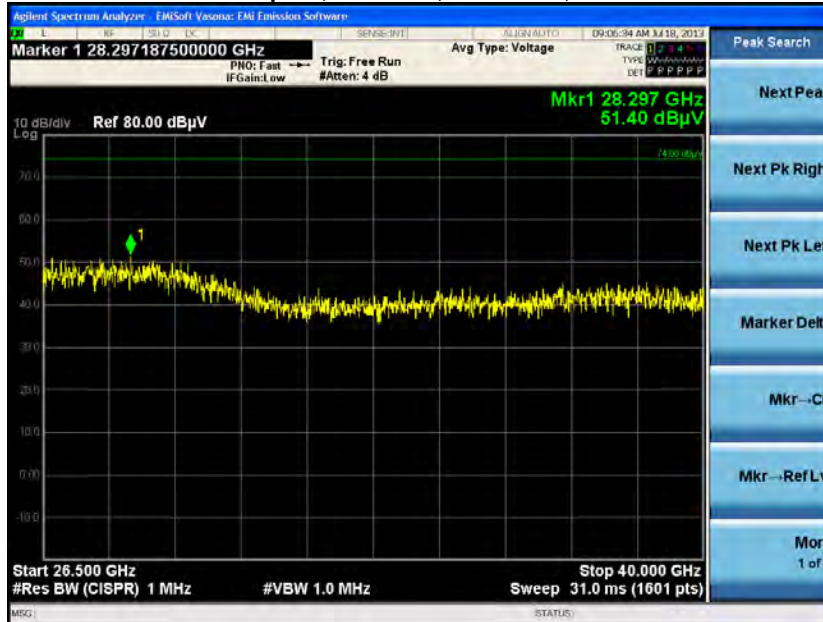



Receiver Radiated Spurious Emissions

Radiated Receiver Spurs, All Rates, All Modes, Average




Radiated Receiver Spurs, All Rates, All Modes, Peak






Radiated Test Setup 1–18GHz

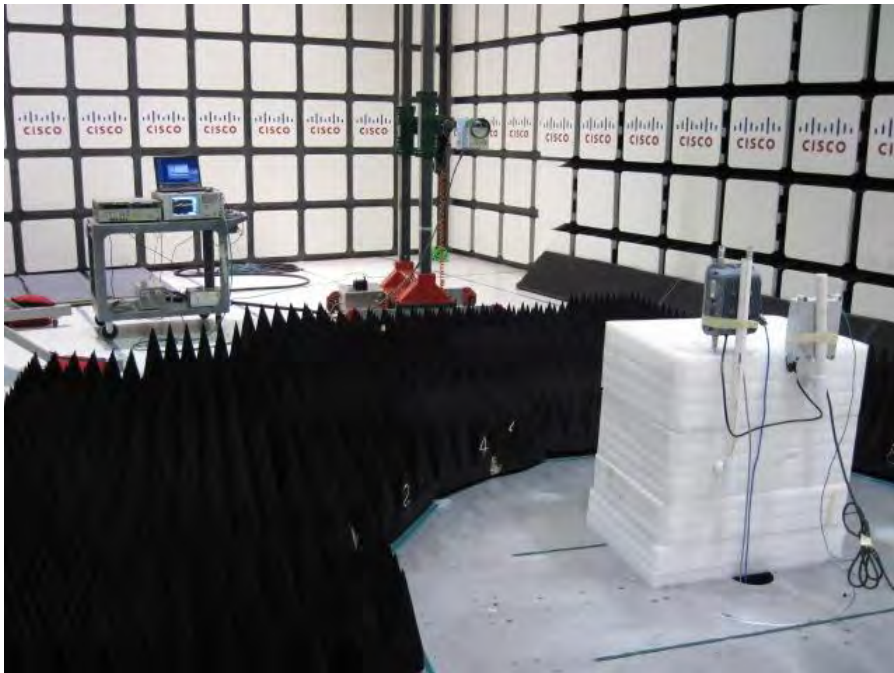

Radiated Test Setup 18–40GHz



Conducted Emissions

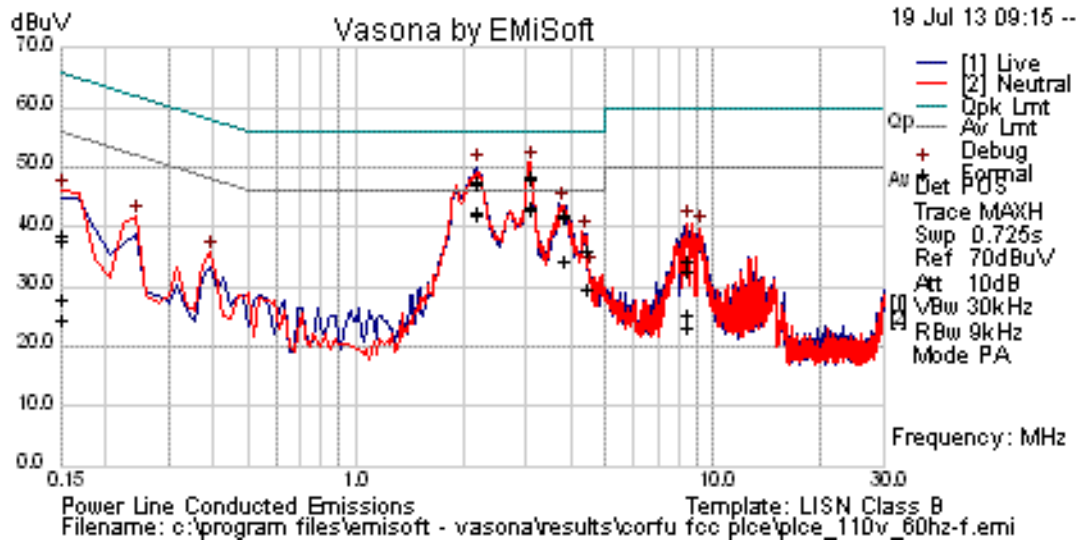

No	Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
1	3.079	23.2	20.0	.0	43.2	Average	Neutral	46.0	-2.8	Pass
2	3.079	23.1	20.0	.0	43.1	Average	Live	46.0	-2.9	Pass
3	2.183	22.3	20.0	.0	42.3	Average	Neutral	46.0	-3.7	Pass
4	2.184	22.2	20.0	.0	42.2	Average	Live	46.0	-3.8	Pass
5	3.079	28.3	20.0	.0	48.3	Quasi Peak	Neutral	56.0	-7.7	Pass
6	3.079	28.2	20.0	.0	48.2	Quasi Peak	Live	56.0	-7.8	Pass
7	2.183	27.4	20.0	.0	47.5	Quasi Peak	Neutral	56.0	-8.6	Pass
8	2.184	27.3	20.0	.0	47.3	Quasi Peak	Live	56.0	-8.7	Pass
9	3.819	14.3	20.0	.1	34.3	Average	Neutral	46.0	-11.7	Pass
10	3.819	14.3	20.0	.1	34.3	Average	Live	46.0	-11.7	Pass
11	3.819	22.0	20.0	.1	42.0	Quasi Peak	Neutral	56.0	-14.0	Pass
12	3.819	21.6	20.0	.1	41.6	Quasi Peak	Live	56.0	-14.4	Pass
13	4.420	9.5	20.0	.1	29.5	Average	Neutral	46.0	-16.5	Pass
14	4.420	9.4	20.0	.1	29.5	Average	Live	46.0	-16.5	Pass
15	4.420	16.1	20.0	.1	36.2	Quasi Peak	Live	56.0	-19.8	Pass
16	4.420	16.0	20.0	.1	36.1	Quasi Peak	Neutral	56.0	-19.9	Pass
17	8.469	5.0	20.1	.1	25.2	Average	Neutral	50.0	-24.8	Pass
18	8.469	14.3	20.1	.1	34.5	Quasi Peak	Neutral	60.0	-25.5	Pass
19	8.469	2.8	20.1	.1	23.0	Average	Live	50.0	-27.0	Pass
20	.150	17.3	21.4	.1	38.8	Quasi Peak	Neutral	66.0	-27.2	Pass
21	8.469	12.6	20.1	.1	32.8	Quasi Peak	Live	60.0	-27.2	Pass


22	.150	6.3	21.4	.1	27.8	Average	Neutral	56.0	-28.2	Pass
23	.150	16.2	21.4	.1	37.7	Quasi Peak	Live	66.0	-28.3	Pass
24	.150	2.9	21.4	.1	24.4	Average	Live	56.0	-31.6	Pass

Conducted Emission Test Setup





Radiated emissions

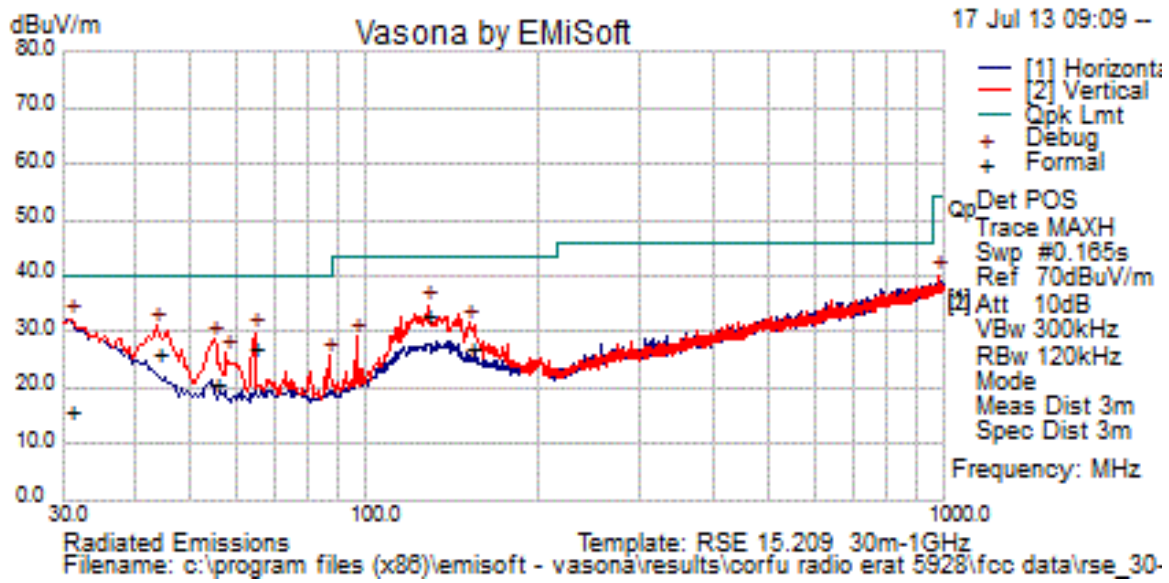



Title: Radiated Emissions 30-1000MHz Configuration Photograph



Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 * P * G) / d} \quad \text{and} \quad S = E^2 / 3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm²

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W}) / 1000 \quad d(\text{cm}) = 100 * d(\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d=Distance in cm

P=Power in mW

G=Numeric Antenna Gain

S=Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm}) / 10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$s = ((0.282 * 10^{((P + G) / 20)}) / d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm²



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$ maximum. The highest supported antenna gain is 5 dBi. Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Power Density (mW/cm ²)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
5745	1	26.6	5	10.72	20	9.28
5785	1	25.9	5	9.89	20	10.11
5825	1	26.0	5	10.01	20	9.99

MPE Calculations

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Margin (mW/cm ²)
5745	20	26.7	5	0.29	1	0.71
5785	20	26.0	5	0.25	1	0.75
5825	20	26.3	5	0.27	1	0.73

**Appendix C: Test Equipment/Software Used to perform the test**

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
44940	Rohde & Schwarz	ESU	Spectrum Analyzer	15May13	15May14
40514	Agilent	E4440A	Spectrum Analyzer	12-NOV-12	12-NOV-13
47299	Agilent	PXA	Signal Analyzer	04Sept12	04Sept13
3003	HP	8373B	Signal Generator	26Mar13	26Mar14
30654	Sunol Sciences	JB1	Combination Antenna	16Oct12	16Oct13
4882	EMCO	3115	Horn Antenna	28Jun13	28Jun14
41935	Newport	iBTHP-5-DB9	Temperature Probe	25MAR13	25MAR14
5691	Miteq	NSP1800-25-S1	1GHz to 18GHz Pre-Amplifier	01Feb13	01Feb14
41979	Cisco	1840	18-40GHz EMI Test Head	09Jul13	09Jul14
25658	Micro-Coax	UFB311A-1-0840-504504	RF Cable	13Feb13	13Feb14
21117	Micro-Coax	UFB311A-0-2484-520520	RF Cable	24Aug12	24Aug13
48720	Huber Suhner	Sucoflex 106PA	RF Cable	20Aug12	20Aug13
47300	Agilent	MXE	EMI Receiver	13Nov12	13Nov13
8195	TTE	H613-150K-50-21378	Filter	04Jan13	04Jan14
8496	Fischer Custom	FCC-450B-2.4-N	Pulse limiter	20May13	20May14
39110	Coleman	RG-223	RF Cable, 25 ft., N	29Nov12	29Nov13
29957	Fischer	FCC-LISN-50/250-50-2-01	LISN	02Aug12	02Aug13
29959	Fischer	FCC-LISN-PA-NENA-5-15	LISN Adapter	02Aug12	02Aug13
44023	Fischer	M2	CDN	16Nov12	16Nov13
31919	Midwest Microwave	TRM-2048-MC-BNC-10	50Ohm Terminator	30Aug12	30Aug13
39162	Coleman	RG-223	RF Cable, 2 ft. BNC	09Oct12	09Oct13
25001	Micro-Coax	UFB197C-1-0240-504504	RF Cable, 2 ft.	24Mar13	24Mar14