



FCC PART 15.407
ISEDC RSS-247, ISSUE 2, FEBRUARY 2017
TEST REPORT

For
Cisco Systems Inc.

125 West Tasman Drive,
San Jose, CA 95134, USA

FCC ID: LDK948342197
IC: 2461N-948342197

Table with 2 columns: Report Type, Product Type, Prepared By, Report Number, Report Date, Reviewed By, and company address.



Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This test report shall not be used by the customer to claim product certification, approval, or endorsement by A2LA or any agency of the United States Government or any foreign government.

* This test report may contain data and test methods that are not covered by BACL's scope of accreditation as of the test report date shown above. These items are marked within the test report text with an asterisk "**"

TABLE OF CONTENTS

1	GENERAL DESCRIPTION.....	4
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2	MECHANICAL DESCRIPTION OF EUT	4
1.3	OBJECTIVE.....	4
1.4	RELATED SUBMITTAL(S)/GRANT(S)	4
1.5	TEST METHODOLOGY	4
1.6	MEASUREMENT UNCERTAINTY	5
1.7	TEST FACILITY REGISTRATIONS	5
1.8	TEST FACILITY ACCREDITATIONS.....	5
2	SYSTEM TEST CONFIGURATION.....	8
2.1	JUSTIFICATION.....	8
2.2	EUT EXERCISE SOFTWARE.....	8
2.3	DUTY CYCLE CORRECTION FACTOR.....	8
2.4	EQUIPMENT MODIFICATIONS.....	11
2.5	LOCAL SUPPORT EQUIPMENT	11
2.6	REMOTE SUPPORT EQUIPMENT	11
2.7	INTERFACE PORTS AND CABLING	11
3	SUMMARY OF TEST RESULTS.....	12
4	FCC §15.209, §15.407(B) & ISEDC RSS-247 §6.2 - SPURIOUS RADIATED EMISSIONS	13
4.1	APPLICABLE STANDARD	13
4.2	TEST SETUP	15
4.3	TEST PROCEDURE	16
4.4	CORRECTED AMPLITUDE AND MARGIN CALCULATION	16
4.5	TEST EQUIPMENT LIST AND DETAILS	17
4.6	TEST ENVIRONMENTAL CONDITIONS.....	18
4.7	SUMMARY OF TEST RESULTS.....	18
4.8	RADIATED EMISSIONS TEST RESULT	19
1)	30 MHz – 1 GHz WORST CASE, MEASURED AT 3 METERS	19
2)	1-18 GHz, MEASURED AT 1 METERS	21
3)	18 - 26.5 GHz SCAN, MEASURED AT 1 METER.....	25
4)	26.5 - 40 GHz SCAN, MEASURED AT 1 METER.....	26
5	ANNEX A- EUT TEST SETUP PHOTOGRAPHS.....	28
6	ANNEX B- EUT INTERNAL PHOTOGRAPHS.....	29
7	ANNEX C (NORMATIVE) - A2LA ELECTRICAL TESTING CERTIFICATE	30

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2104192-407	CIIPC Report	2021-05-21

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Cisco Systems Inc.*, and their product model: *C9130AXE-B (US)*, and *C9130AXE-A (Canada)*, FCC ID: *LDK948342197*, IC: *2461N-948342197* as referred to as EUT in this report. The product is an 802.11 ax Access Point.

1.2 Mechanical Description of EUT

Length (cm)	Width (cm)	Height (cm)	Weight (kg)	S/N
23	23	4	2.0	KWC250600SZ

1.3 Objective

This report is prepared on behalf of *Cisco Systems Inc.* in accordance with FCC CFR47 §15.407, ISEDC RSS-247 Issue 2 on February 2017.

The objective is to determine continuous compliance with FCC Part 15.407, ISEDC RSS-247 rules for Radiated Spurious Emissions.

1.4 Related Submittal(s)/Grant(s)

Equipment Class: DTS, FCC ID: LDK948342197, IC: 2461N-948342197.

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz, and FCC KDB 789033 D02 General UNII Test Procedure New Rules v02r01.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment;

Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):
 - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
 - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
 - 2 All Scope 2-Licensed Personal Mobile Radio Services;
 - 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
 - 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
 - 5 All Scope 5-Licensed Fixed Microwave Radio Services
 - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
 - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers

- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test. Radio was configured to transmit the highest power setting that's supported, and all antennas were active at the same time.

2.2 EUT Exercise Software

The test firmware used was Tera Term and test commands, provided by *Cisco Systems Inc.*, the software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting
5 GHz Wi-Fi, 5 GHz Regular 5 GHz XOR, 5 GHz Aux (nonHT20)	5200	17
	5300	17
	5580	17
	5785	17

Data Rates Tested:
nonHT20 mode: 6Mbps

2.3 Duty Cycle Correction Factor


According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 section B:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

Radio Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
5 GHz Wi-Fi (nonHT20)	1.43	1.55	91.80	0.37
5 GHz Regular (nonHT20)	1.43	1.55	91.80	0.37
5 GHz XOR (nonHT20)	1.43	1.56	91.28	0.40
5 GHz Aux (nonHT20)	0.29	0.31	93.74	0.28


Note: Duty Cycle Correction Factor = $10 \cdot \log(1/\text{duty cycle})$
Please refer to the following plots.

5 GHz Wi-Fi (nonHT20)

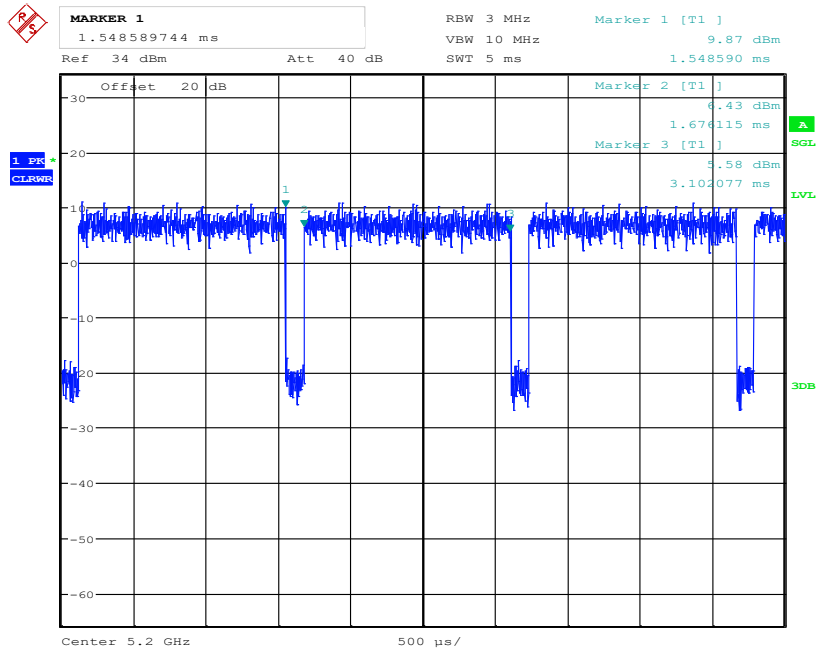


Date: 20.MAY.2021 16:37:16

5 GHz Regular (nonHT20)

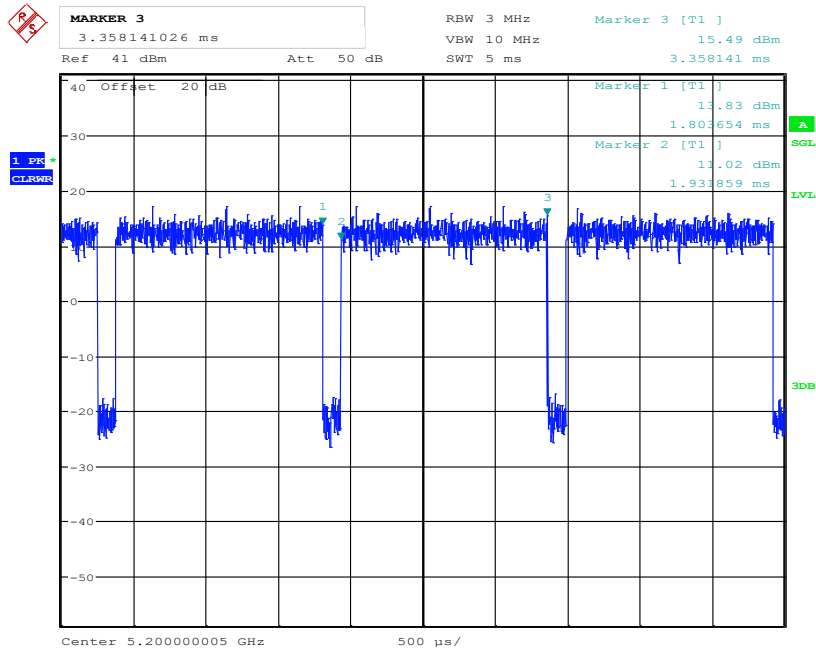


Date: 20.MAY.2021 16:17:13

5 GHz XOR (nonHT20)

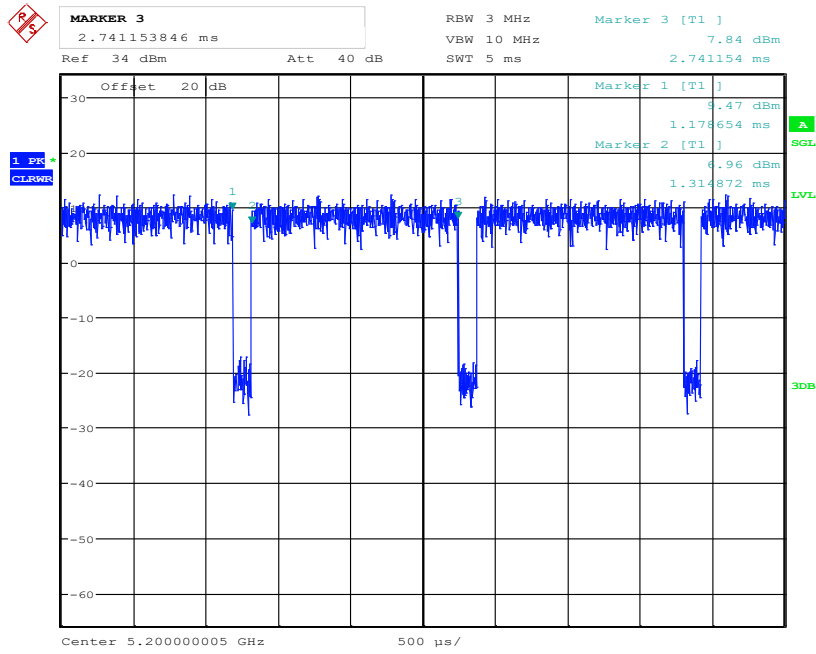

Date: 20.MAY.2021 16:13:32

5 GHz Aux (nonHT20)

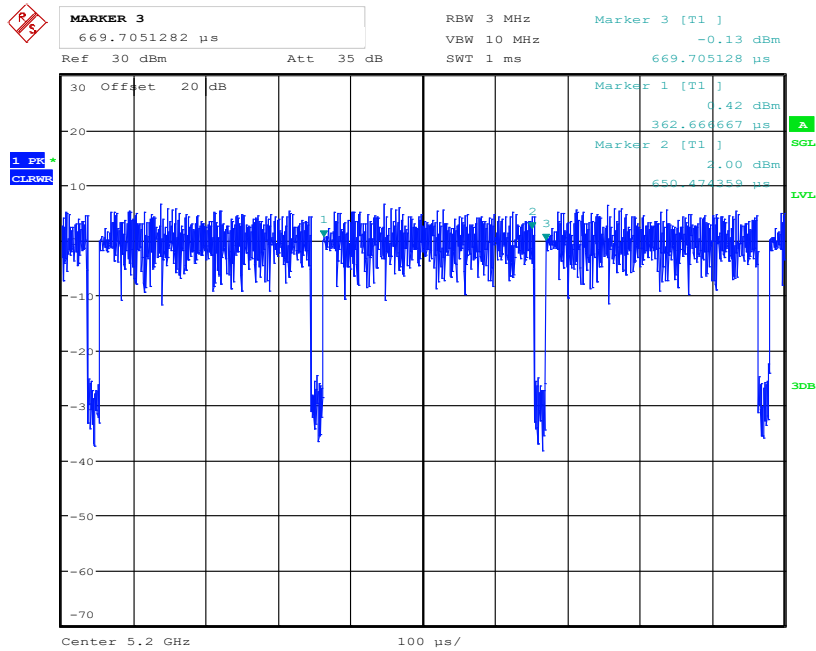

Date: 20.MAY.2021 16:24:32

2.4 Equipment Modifications

N/A

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude E6410	3CKRAQ1

2.6 Remote Support Equipment

Manufacturer	Description	Model
Cisco	Power Supply	AIR-PWRIN-J6 V01

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
RS232 Male to Ethernet Cable	2 m	RS232 Female to USB Cable	EUT
RS232 Female to USB Cable	2 m	Laptop	RS232 Male to Ethernet Cable

3 Summary of Test Results

FCC, ISED Rules	Description of Test	Result
FCC §2.1053, §15.205, §15.209, 15.407(b) ISED RSS-247 §6.2	Spurious Radiated Emissions	Compliant

4 FCC §15.209, §15.407(b) & ISEDC RSS-247 §6.2 - Spurious Radiated Emissions

4.1 Applicable Standard

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3 3458 – 3 358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209: The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 Note 1	3
88 - 216	150 Note 1	3
216 - 960	200 Note 1	3
Above 960	500	3

Note 1: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC Part 15.407 (b) and LP0002§4.7.4

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

As per ISEDC RSS-247 §6.2

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250- 5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz, the device shall comply with the following:

1. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. if the equipment is intended for outdoor use; or
2. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of Section 6.2.1. The device shall be labelled "for indoor use only."

For devices with operating frequencies in the band 5250-5350 MHz but having a channel bandwidth that overlaps the band 5150-5250 MHz, the devices' unwanted emission shall not exceed -27 dBm/MHz e.i.r.p. outside the band 5150-5350 MHz and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device shall be labelled "for indoor use only."

For transmitters operating in the band 5470-5725 MHz, emissions outside the band shall not exceed -27 dBm/MHz e.i.r.p.

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p. For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.


4.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15.407 limits.


The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

Below 1GHz:

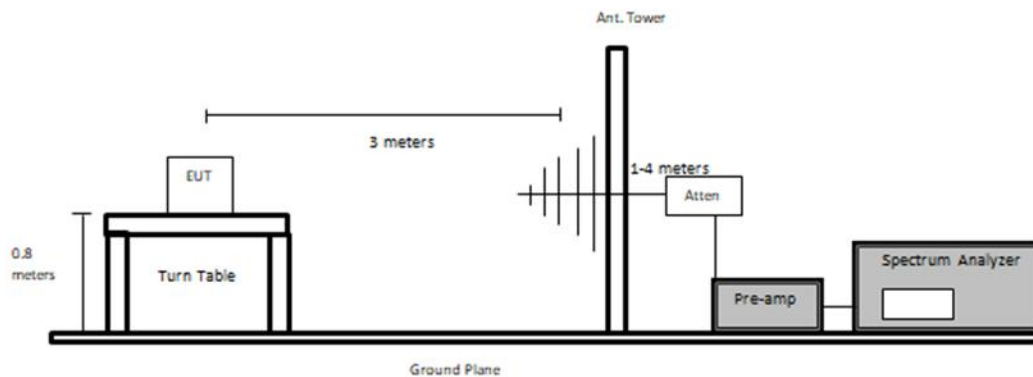

Above 1GHz:

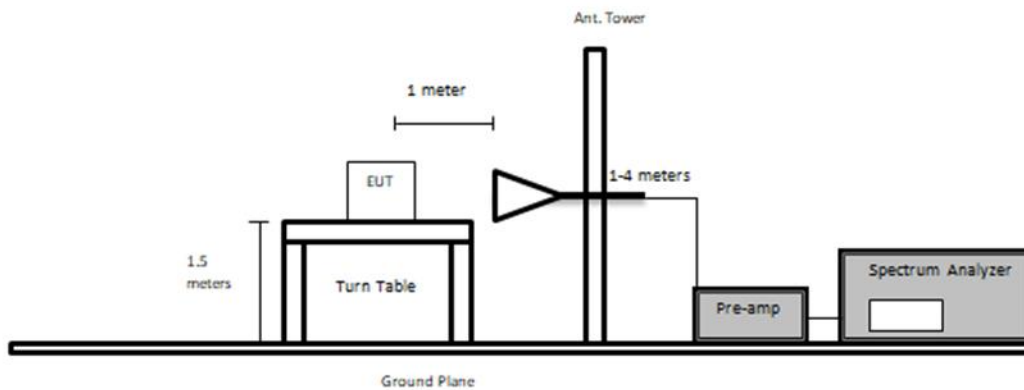

4.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter or 1.5 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = 100 ms
- (2) Average: RBW = 1MHz / VBW = 1 / T or 10 Hz / Sweep = Auto

4.4 Corrected Amplitude and Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$\text{CA} = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

4.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950.03	100338	2020-03-17	17 months
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2021-02-12	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB3	A020106-2	2019-11-20	2 years
ETS Lindgren	Horn Antenna	3117	00218973	2019-02-13	2.5 years
Wisewave	Antenna, Horn	ARH-4223-02	10555-02	2020-02-05	2 years
Wisewave	Antenna, Horn	ARH-2823-02	10555-02	2020-02-27	2 years
Agilent	Amplifier, Pre	8447D	2443A04374	2020-08-17	1 year
HP	Pre-Amplifier	8449B	3008A01978	2021-05-05	1 year
AH Systems	Preamplifier	PAM 1840 VH	170	2020-11-09	1 year
BACL	5m3 Sensitivity Box	1	2	2020-10-27	1 year
IW Incorporated	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS-1571AN- 3960-KPS	DC 1917	2021-03-03	1 year
IW Incorporated	157 Series Cable Armored with 2.92mm Male Plugs on Both Sides	KPS-1571AN- 2400	DC 1922	2020-06-06	1 year
Keysight Technologies	RF Limiter	11867A	MY42242932	2021-03-03	1 year
MDP Digital	Times Microwave LMR 400 UltraFex Coaxial Cable 35'	LMR400UF	BACL1904161	2020-05-20	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

4.6 Test Environmental Conditions

Temperature:	22-25 °C
Relative Humidity:	29-30 %
ATM Pressure:	102.1 kPa

The testing was performed by Deepak Mishra from 2021-04-29 to 2021-05-13 in 5m chamber 3.4

4.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15.407 and RSS-247 standards' radiated emissions limits, and had the worst margin of:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, Channel
-3.66	39994.101	Vertical	nonHT20, 5200 MHz

Please refer to the following table and plots for specific test result details

4.8 Radiated Emissions Test Result


1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

EUT configuration: 5 GHz Wi-Fi Regular (nonHT20, 5200 MHz, 4Tx) + 5 GHz Wi-Fi XOR (nonHT20, 5200 MHz, 4Tx) + 5 GHz AUX (nonHT20, 5200MHz, 1Tx)

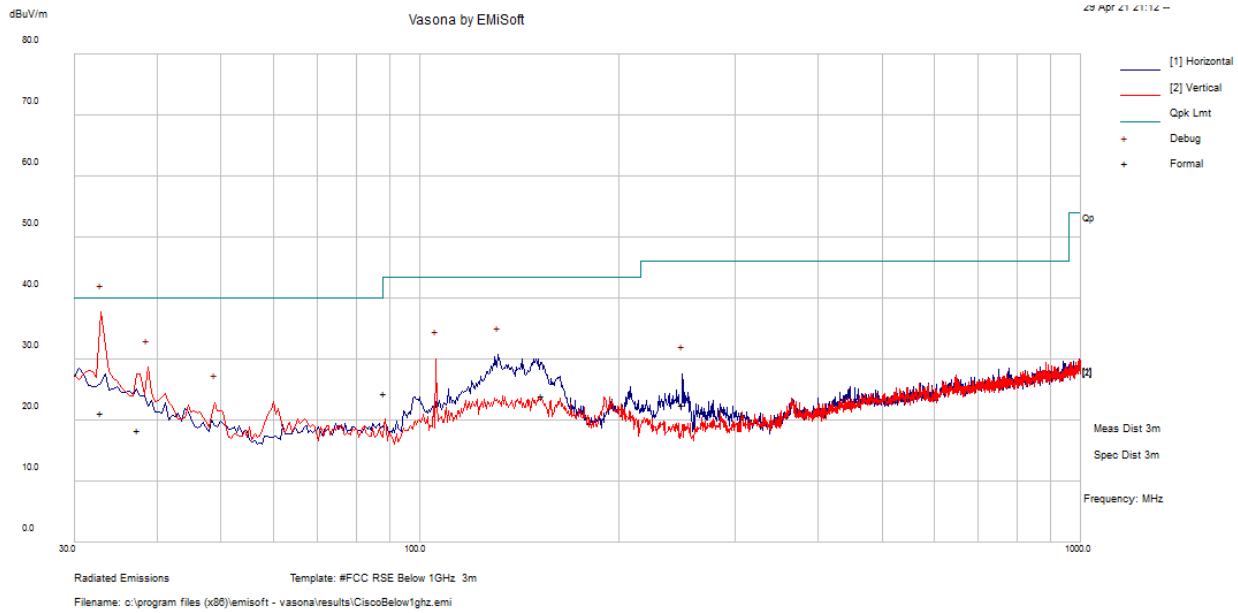

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBuV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV/m)	Margin (dB)	Comment
32.77575	22.37	0.33	22.7	129	V	263	40	-17.3	QP
38.31425	22.8	-3.88	18.91	141	V	227	40	-21.09	QP
131.30025	29.16	-4.41	24.75	297	H	113	43.5	-18.75	QP
105.66875	30.41	-6.32	24.09	109	V	304	43.5	-19.41	QP
49.105	28.38	-10.46	17.92	198	V	53	40	-22.08	QP
249.971	29.47	-6.48	22.98	139	H	353	46	-23.02	QP

EUT configuration: 5 GHz Wi-Fi (nonHT20, 5200 MHz, 8Tx) + 5 GHz AUX (nonHT20, 5200MHz, 1Tx)

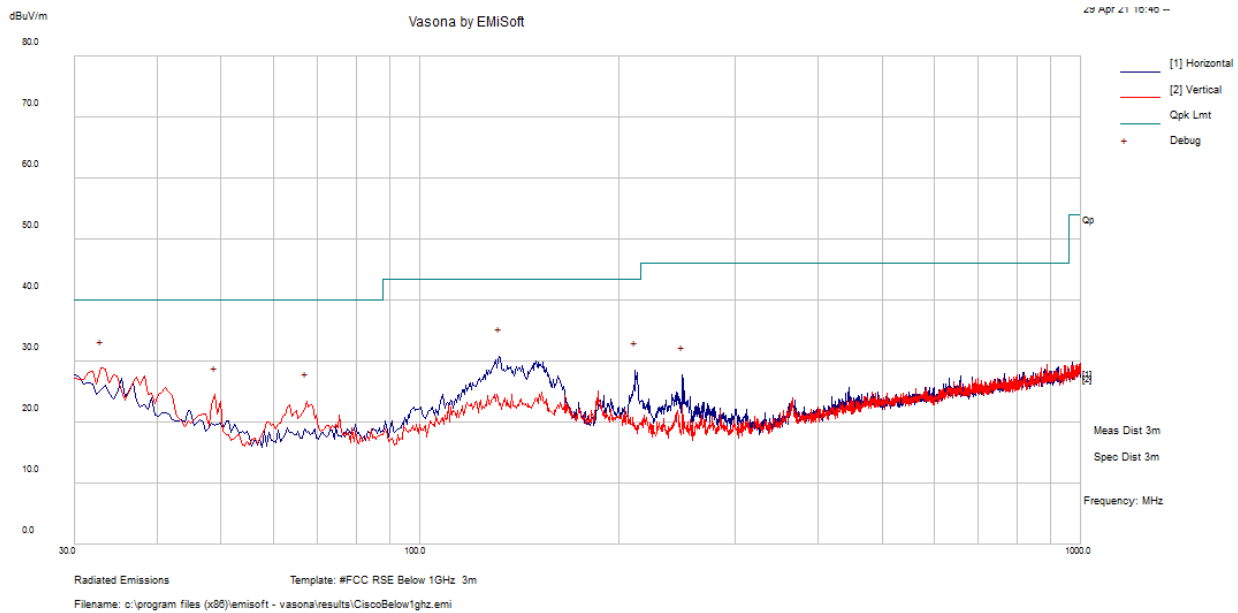

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comment
32.713	23.46	0.37	23.83	23.83	V	151	40	-16.17	QP
131.91025	28.69	-4.47	24.23	24.23	H	216	43.5	-19.27	QP
211.57875	32.92	-7.65	25.26	25.26	H	115	43.5	-18.24	QP
49.1055	30.6	-10.46	20.13	20.13	V	201	40	-19.87	QP
67.73	27.8	-10.42	17.39	17.39	V	7	40	-22.61	QP
249.99775	32.62	-6.48	26.14	26.14	H	333	46	-19.86	QP


2) 1-18 GHz, measured at 1 meters

EUT configuration: 5 GHz Wi-Fi Regular (nonHT20, 4TxS) + 5 GHz Wi-Fi XOR (nonHT20, 4TxS) + 5 GHz AUX (nonHT20, 1Tx)

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Channel 40: 5200 MHz Non HT20 mode power setting: 17											
10234	32.18	0	150	V	38.00	13.35	29.29	54.24	84	-29.76	PK
10234	21.01	0	150	V	38.00	13.35	29.29	43.07	64	-20.93	AV
10410	31.22	0	150	H	38.00	13.35	29.29	53.28	84	-30.72	PK
10410	20.79	0	150	H	38.00	13.35	29.29	42.85	64	-21.15	AV
15480	32.73	0	150	V	40.50	11.06	27.70	56.59	84	-27.41	PK
15480	22.43	0	150	V	40.50	11.06	27.70	46.29	64	-17.71	AV
15622	35.26	0	150	H	40.50	11.06	27.70	59.12	84	-24.88	PK
15622	23.27	0	150	H	40.50	11.06	27.70	47.13	64	-16.87	AV
Channel 60: 5300 MHz Non HT20 mode power setting: 17											
10515	32.29	0	150	V	38.20	13.35	27.27	56.57	84	-27.43	PK
10515	20.51	0	150	V	38.20	13.35	27.27	44.79	64	-19.21	AV
10543	31.77	0	150	H	38.20	13.35	27.27	56.05	84	-27.95	PK
10543	20.56	0	150	H	38.20	13.35	27.27	44.84	64	-19.16	AV
15897	33.12	0	150	V	41.00	11.06	25.51	59.67	84	-24.33	PK
15897	20.91	0	150	V	41.00	11.06	25.51	47.46	64	-16.54	AV
15872	33.65	0	150	H	41.00	11.06	25.51	60.20	84	-23.80	PK
15872	21.47	0	150	H	41.00	11.06	25.51	48.02	64	-15.98	AV
Channel 116: 5580 MHz Non HT20 mode power setting: 17											
11160	32.08	0	150	V	38.50	13.64	28.16	56.06	84	-27.94	PK
11160	18.73	0	150	V	38.50	13.64	28.16	42.71	64	-21.29	AV
11160	28.45	0	150	H	38.50	13.64	28.16	52.43	84	-31.57	PK
11160	18.32	0	150	H	38.50	13.64	28.16	42.30	64	-21.70	AV
14080	34.40	0	150	V	39.10	14.60	25.15	62.95	84	-21.06	PK
14080	21.85	0	150	V	39.10	14.60	25.15	50.40	64	-13.60	AV
14080	35.19	0	150	H	39.10	14.60	25.15	63.74	84	-20.27	PK
14080	23.46	0	150	H	39.10	14.60	25.15	52.01	64	-12.00	AV
16740	28.86	0	150	V	42.30	11.40	25.41	57.15	84	-26.85	PK
16740	18.75	0	150	V	42.30	11.40	25.41	47.04	64	-16.96	AV
16740	29.13	0	150	H	42.30	11.40	25.41	57.42	84	-26.58	PK
16740	18.59	0	150	H	42.30	11.40	25.41	46.88	64	-17.12	AV

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Channel 157: 5785 MHz Non HT20 mode power setting: 17											
11562	32.70	0	150	V	38.70	13.88	28.34	56.94	84	-27.06	PK
11562	20.97	0	150	V	38.70	13.88	28.34	45.21	64	-18.79	AV
11525	33.49	0	150	H	38.70	13.88	28.34	57.73	84	-26.27	PK
11525	21.35	0	150	H	38.70	13.88	28.34	45.59	64	-18.41	AV
17355	33.02	0	150	V	41.80	12.94	25.89	61.87	84	-22.13	PK
17355	21.53	0	150	V	41.80	12.94	25.89	50.38	64	-13.62	AV
17355	32.97	0	150	H	41.80	12.94	25.89	61.82	84	-22.18	PK
17355	21.64	0	150	H	41.80	12.94	25.89	50.49	64	-13.51	AV

Measurement plots for channel 40: 5200 MHz

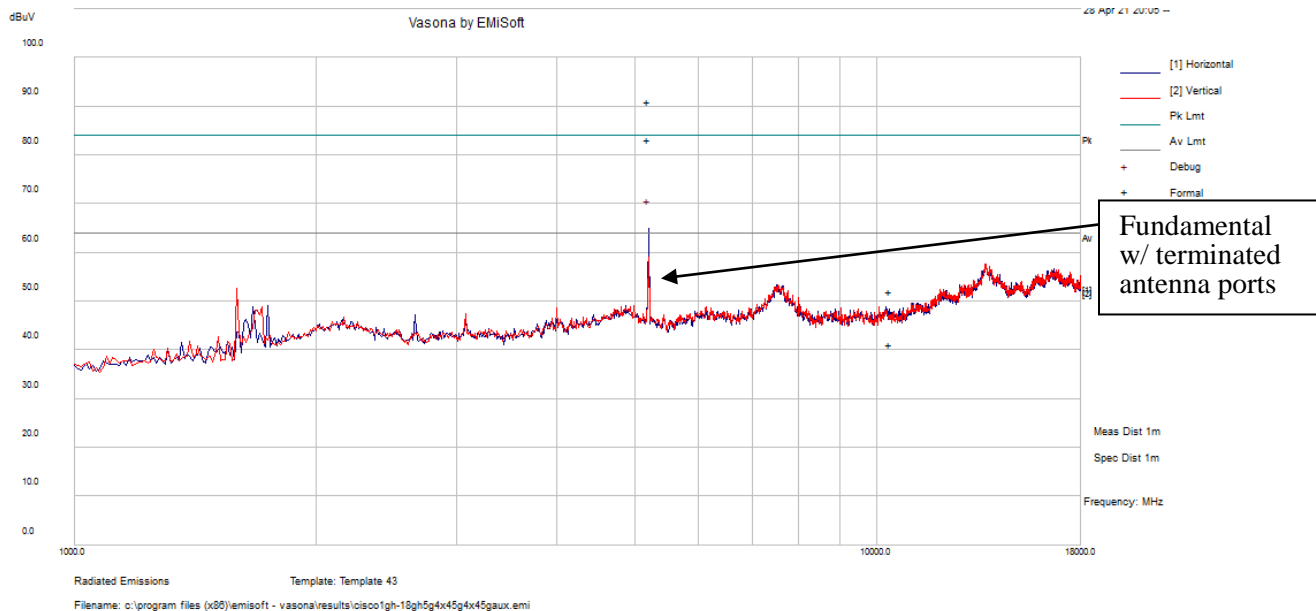


EUT configuration: 5 GHz Wi-Fi (nonHT20, 8Tx) + 5 GHz AUX (nonHT20, 1Tx)

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Channel 40: 5200 MHz Non HT20 mode power setting: 17											
10400	27.37	0	150	V	38.10	13.35	29.71	49.11	84	-34.89	PK
10400	17.40	0	150	V	38.10	13.35	29.71	39.14	64	-24.86	AV
10400	28.22	0	150	H	38.10	13.35	29.71	49.96	84	-34.04	PK
10400	16.95	0	150	H	38.10	13.35	29.71	38.69	64	-25.31	AV
15600	28.87	0	150	V	40.50	13.38	26.65	56.10	84	-27.90	PK
15600	19.05	0	150	V	40.50	13.38	26.65	46.28	64	-17.72	AV
15600	30.37	0	150	H	40.50	13.38	26.65	57.60	84	-26.40	PK
15600	19.31	0	150	H	40.50	13.38	26.65	46.54	64	-17.46	AV
Channel 60: 5300 MHz Non HT20 mode power setting: 17											
10600	29.61	0	150	V	38.20	13.35	30.25	50.91	84	-33.09	PK
10600	17.47	0	150	V	38.20	13.35	30.25	38.77	64	-25.23	AV
10600	29.54	0	150	H	38.20	13.35	30.25	50.84	84	-33.16	PK
10600	17.31	0	150	H	38.20	13.35	30.25	38.61	64	-25.39	AV
13240	33.19	0	150	V	39.10	14.65	26.59	60.35	84	-23.65	PK
13240	25.59	0	150	V	39.10	14.65	26.59	52.75	64	-11.25	AV
13240	32.39	0	150	H	39.10	14.65	26.59	59.55	84	-24.45	PK
13240	21.37	0	150	H	39.10	14.65	26.59	48.53	64	-15.47	AV
15900	31.92	0	150	V	41.00	11.06	25.51	58.47	84	-25.53	PK
15900	19.31	0	150	V	41.00	11.06	25.51	45.86	64	-18.14	AV
15900	31.07	0	150	H	41.00	11.06	25.51	57.62	84	-26.38	PK
15900	19.25	0	150	H	41.00	11.06	25.51	45.80	64	-18.20	AV
Channel 116: 5580 MHz Non HT20 mode power setting: 17											
11085	28.95	0	150	V	38.50	13.88	28.61	52.72	84	-31.28	PK
11085	17.43	0	150	V	38.50	13.88	28.61	41.20	64	-22.80	AV
11304	28.77	0	150	H	38.50	13.88	28.61	52.54	84	-31.46	PK
11304	17.61	0	150	H	38.50	13.88	28.61	41.38	64	-22.62	AV
13212	32.33	0	150	V	39.10	14.65	25.73	60.35	84	-23.65	PK
13212	21.62	0	150	V	39.10	14.65	25.73	49.64	64	-14.36	AV
13722	32.21	0	150	H	39.10	14.65	25.73	60.23	84	-23.77	PK
13722	22.06	0	150	H	39.10	14.65	25.73	50.08	64	-13.92	AV
16774	30.31	0	150	V	42.30	11.40	25.47	58.54	84	-25.46	PK
16774	19.13	0	150	V	42.30	11.40	25.47	47.36	64	-16.64	AV
16718	30.16	0	150	H	42.30	11.40	25.47	58.39	84	-25.61	PK
16718	18.91	0	150	H	42.30	11.40	25.47	47.14	64	-16.86	AV


Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Channel 157: 5785 MHz Non HT20 mode power setting: 17											
11570	41.72	191	162	V	38.90	13.88	28.23	66.27	84	-17.73	PK
11570	29.67	191	162	V	38.90	13.88	28.23	54.22	64	-9.78	AV
11570	38.53	280	160	H	38.90	13.88	28.23	63.08	84	-20.92	PK
11570	27.17	280	160	H	38.90	13.88	28.23	51.72	64	-12.28	AV
17355	31.97	0	150	V	41.80	12.94	25.89	60.82	84	-23.18	PK
17355	19.71	0	150	V	41.80	12.94	25.89	48.56	64	-15.44	AV
17355	32.12	0	150	H	41.80	12.94	25.89	60.97	84	-23.03	PK
17355	19.56	0	150	H	41.80	12.94	25.89	48.41	64	-15.59	AV

Measurement plots for channel 40: 5200 MHz

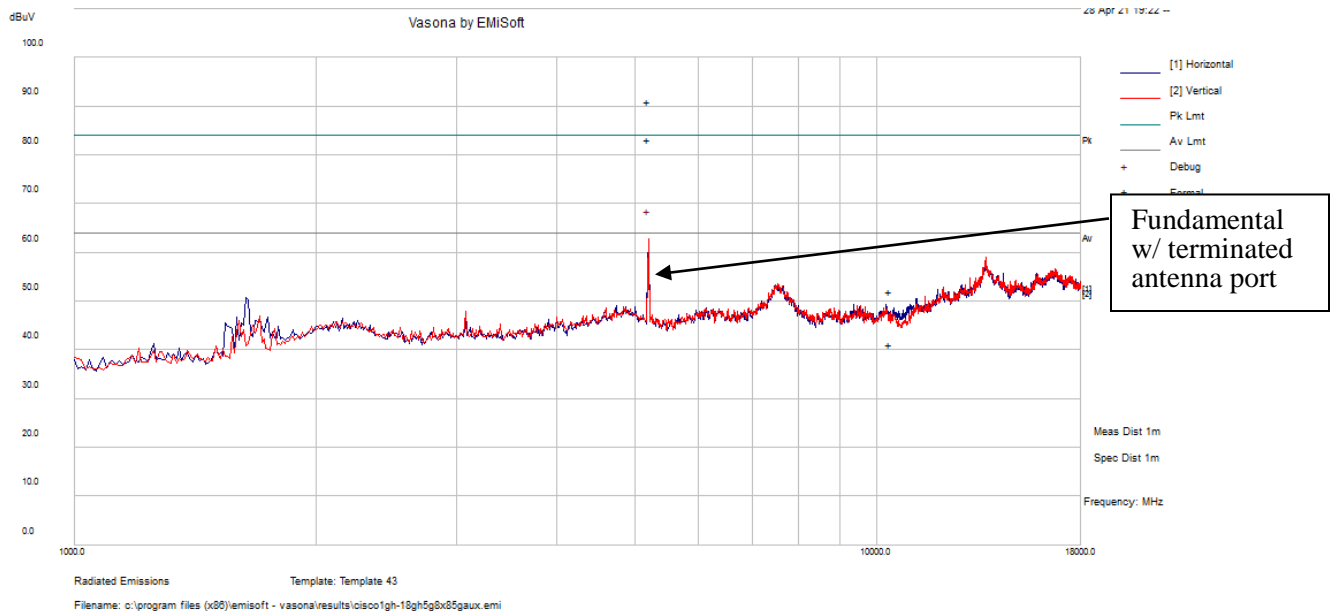


3) 18 - 26.5 GHz Scan, measured at 1 meter

EUT configuration: 5 GHz Wi-Fi Regular (nonHT20, 5200 MHz, 4Tx) + 5 GHz Wi-Fi XOR (nonHT20, 5200 MHz, 4Tx) + 5 GHz AUX (nonHT20, 5200 MHz, 1Tx)

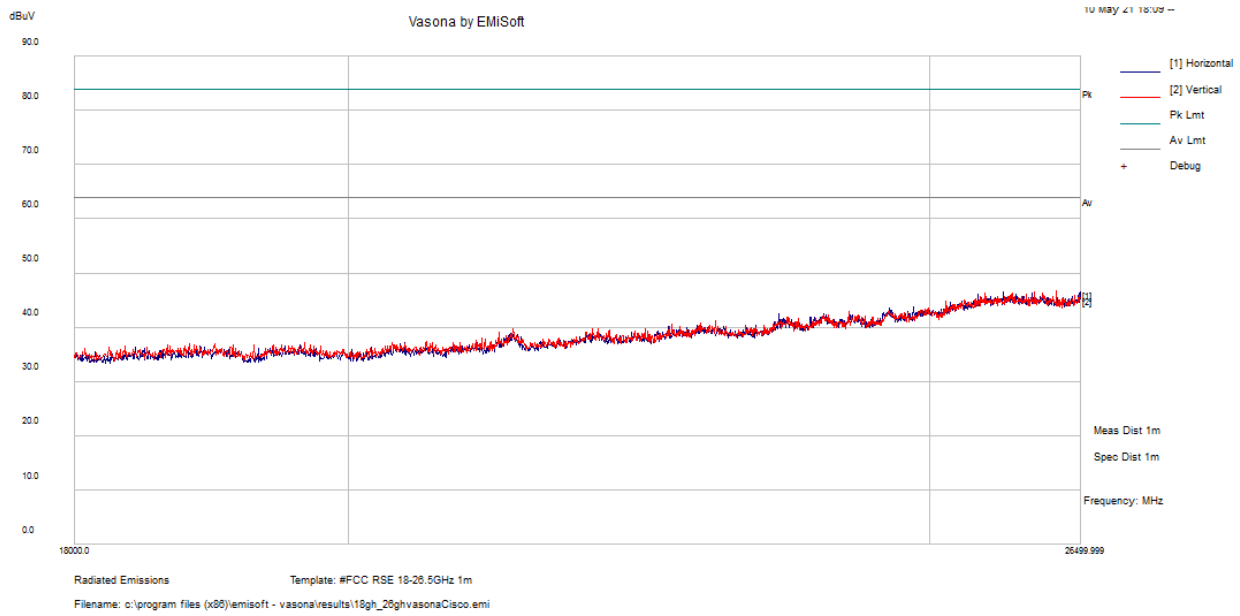


EUT configuration: 5 GHz Wi-Fi (nonHT20, 5200 MHz, 8Tx) + 5 GHz AUX (nonHT20, 5200 MHz, 1Tx)

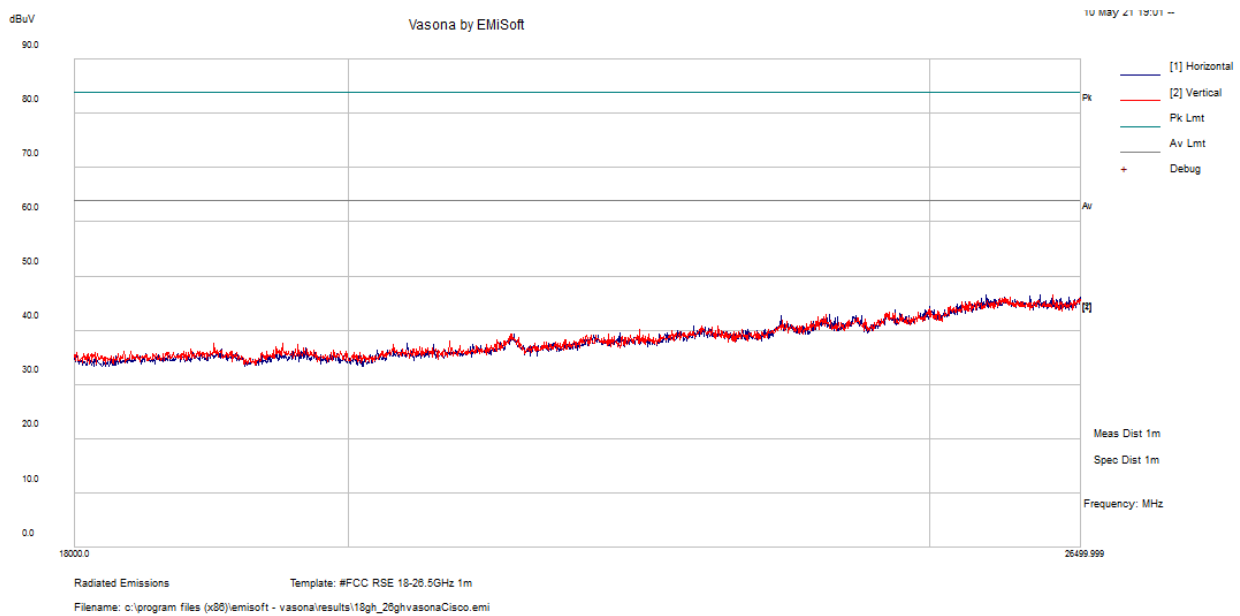


4) 26.5 - 40 GHz Scan, measured at 1 meter

EUT configuration: 5 GHz Wi-Fi Regular (nonHT20, 5200 MHz, 4Txs) + 5 GHz Wi-Fi XOR (nonHT20, 5200 MHz, 4Txs) + 5 GHz AUX (nonHT20, 5200 MHz, 1Tx)

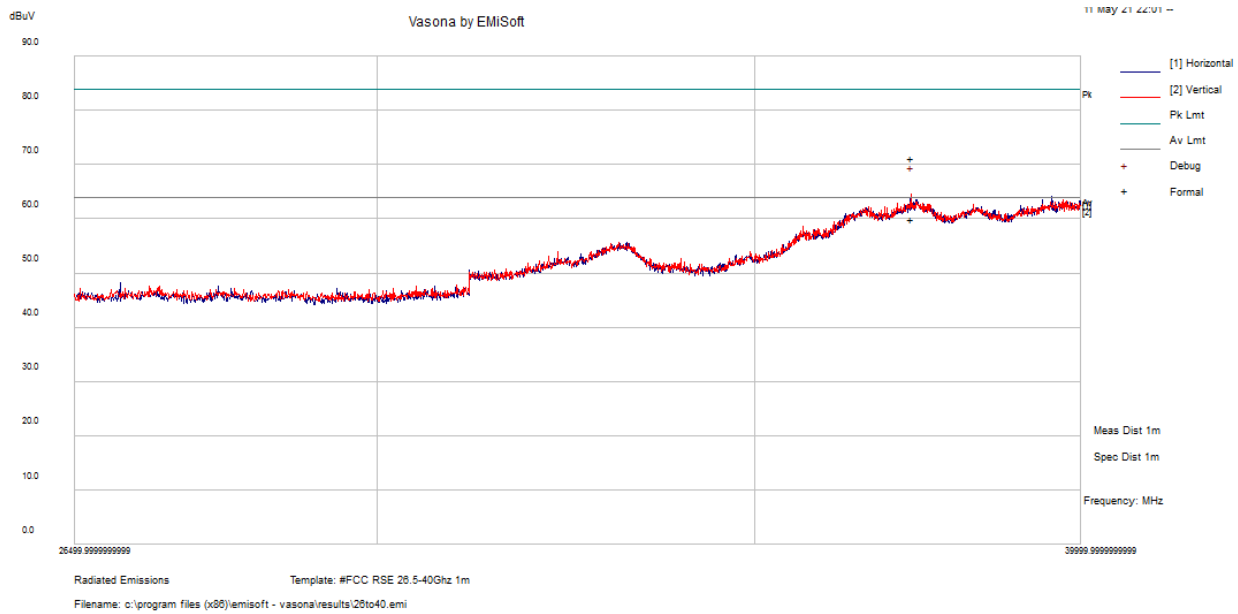

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
37316.558	71.28	272	H	312	84	-12.72	PK
37316.558	60.07	272	H	312	64	-3.93	Avg

EUT configuration: 5 GHz Wi-Fi (nonHT20, 5200 MHz, 8Tx) + 5 GHz AUX (nonHT20, 5200 MHz, 1Tx)

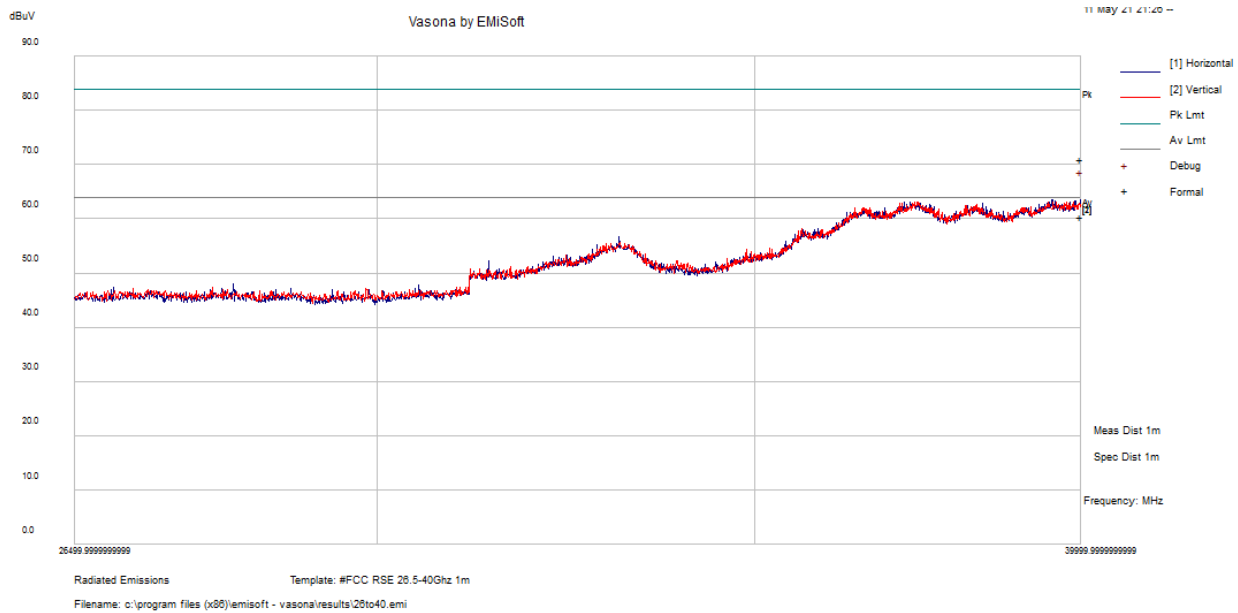

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
39994.101	71.1	224	V	236	84	-12.9	PK
39994.101	60.34	224	V	236	64	-3.66	Avg

5 Annex A- EUT Test Setup Photographs

Please refer to the attachment

6 Annex B- EUT Internal Photographs

Please refer to the attachment

7 Annex C (Normative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 10th day of March 2021.



Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2022

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---