


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	68%
Test Engineer	YC Chen	Configurations	2.4GHz + 5GHz

Horizontal

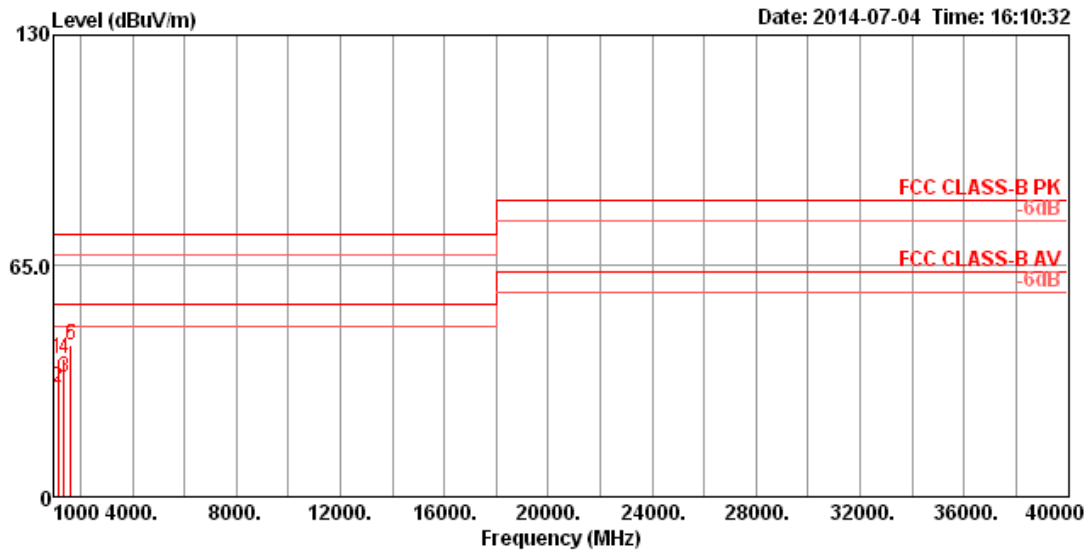

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1124.96	38.65	74.00	-35.35	50.05	2.43	24.09	37.92	127	112	HORIZONTAL	Peak
2	1125.05	30.66	54.00	-23.34	42.05	2.43	24.09	37.91	127	112	HORIZONTAL	Average
3	1375.06	33.62	54.00	-20.38	43.10	2.72	25.22	37.42	100	134	HORIZONTAL	Average
4	1375.22	38.63	74.00	-35.37	48.11	2.72	25.22	37.42	100	134	HORIZONTAL	Peak
5	1624.95	42.59	74.00	-31.41	50.75	3.01	25.65	36.82	100	68	HORIZONTAL	Peak
6	1624.97	42.70	54.00	-11.30	50.86	3.01	25.65	36.82	100	68	HORIZONTAL	Average

Vertical

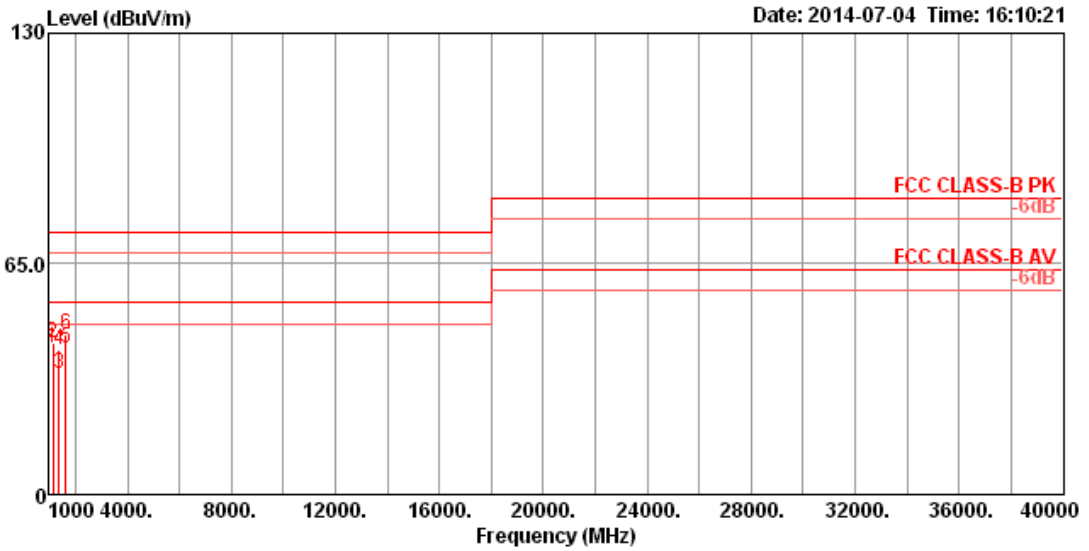

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1125.00	41.35	54.00	-12.65	52.75	2.43	24.09	37.92	128	220	VERTICAL	Average
2	1125.10	42.61	74.00	-31.39	54.00	2.43	24.09	37.91	128	220	VERTICAL	Peak
3	1375.03	33.84	54.00	-20.16	43.32	2.72	25.22	37.42	187	213	VERTICAL	Average
4	1375.06	40.74	74.00	-33.26	50.22	2.72	25.22	37.42	187	213	VERTICAL	Peak
5	1625.08	41.31	54.00	-12.69	49.47	3.01	25.65	36.82	100	166	VERTICAL	Average
6	1625.13	45.13	74.00	-28.87	53.29	3.01	25.65	36.82	100	166	VERTICAL	Peak