



## Dynamic Frequency Selection (DFS) Test Report

**AIR-AP4800-x-K9**

(x=A,B)

Cisco Aironet 802.11ac Dual Band Access Points

FCC ID: LDKBRB4K1779

IC: 2461N-BRB4K1779

**5250-5350, 5470-5725 MHz**

Against the following Specifications:

**CFR47 Part 15.407**

**RSS247**

**Cisco Systems**

170 West Tasman Drive

San Jose, CA 95134

A handwritten signature in black ink, appearing to read "Johanna Knudsen".

**Author:** Johanna Knudsen

**Tested By:** Johanna Knudsen

A handwritten signature in black ink, appearing to read "Gerard Thorpe".

**Approved By:** Gerard Thorpe

**Title:** Manager, Engineering - EMC & Standards  
Operations

**Revision:** See EDCS

This report replaces any previously entered test report under EDCS – **13253354**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

**SECTION 1: OVERVIEW..... 3**

**SECTION 2: ASSESSMENT INFORMATION..... 4**

    2.1 GENERAL ..... 4

    2.2 DATE OF TESTING..... 6

    2.3 REPORT ISSUE DATE ..... 6

    2.4 TESTING FACILITIES ..... 6

    2.5 EQUIPMENT ASSESSED (EUT)..... 6

**SECTION 3: RESULT SUMMARY..... 7**

    3.1 RESULTS SUMMARY TABLE ..... 7

**SECTION 4: SAMPLE DETAILS..... 8**

    4.1 SAMPLE DETAILS ..... 8

    4.2 SYSTEM DETAILS ..... 8

    4.3 MODE OF OPERATION DETAILS..... 8

**APPENDIX A: DYNAMIC FREQUENCY SELECTION (DFS)..... 9**

    A.1 UNII DEVICE DESCRIPTION ..... 9

    A.2 DFS DETECTION THRESHOLDS ..... 12

    A.3 RADAR TEST WAVEFORMS ..... 13

**APPENDIX B: DYNAMIC FREQUENCY SELECTION / TEST RESULTS..... 17**

    B.1 TEST PROCEDURE/RESULTS ..... 35

    B.2 UNII DETECTION BANDWIDTH ..... 38

    B.3 INITIAL CHANNEL AVAILABILITY CHECK TIME ..... 47

    B.4 RADAR BURST AT THE BEGINNING OF THE CHANNEL AVAILABILITY CHECK TIME..... 48

    B.5 RADAR BURST AT THE END OF THE CHANNEL AVAILABILITY CHECK TIME ..... 49

    B.6 IN-SERVICE MONITORING FOR CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND  
NON-OCCUPANCY PERIOD..... 50

    B.7 STATISTICAL PERFORMANCE CHECK ..... 53

**APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST..... 196**



**Section 1: Overview**

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

<b>Specifications:</b>
CFR47 Part 15.407 RSS-247

RSS-247 section A9.3a allows the use of applicable FCC KDBs

Measurements were made in accordance with

- KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:  
110V 60 Hz (+/-20%)

### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

## Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10 <sup>-7</sup>
temperature measurements	± 0.54°
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

## Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.2 Date of testing**

20-APR-18 - 21-MAY-18

**2.3 Report Issue Date**

21-MAY-18

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System 13253354. The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.,  
125 West Tasman Drive  
San Jose, CA 95134, USA

**Registration Numbers for Industry Canada**

<b>Cisco System Site</b>	<b>Address</b>	<b>Site Identifier</b>
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

**Test Engineers**

Johanna Knudsen

**2.5 Equipment Assessed (EUT)**

AIR-AP4800-B-K9

### Section 3: Result Summary

#### 3.1 Results Summary Table

##### Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407 RSS-247	Dynamic Frequency Selection (DFS) Detection Threshold	Pass
FCC 15.407 RSS-247	Channel Availability Check Time	Pass
FCC 15.407 RSS-247	Channel Move Time	Pass
FCC 15.407 RSS-247	Channel Closing Time	Pass
FCC 15.407 RSS-247	Non-Occupancy Period	Pass
FCC 15.407 RSS-247	U-NII Detection Bandwidth	Pass



## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-AP4800-B-K9	Cisco Systems	P2	9.1.8.1	ap3g3	FOC212801L1
S02	PWR-INJ60G0	Microsemi	01	NA	NA	N16106630A00087A05
S03	AIR-CAP3702E-B-K9	Cisco Systems	01	NA	NA	FOC17143E8R
S04	ADP-66CR B	Delta	341-100346-01	NA	NA	DAB2122G3FJ
S05	Support Laptop	HP 840	01	NA	NA	CNU4089N7X
S06	Support Laptop	Lenovo T470	01	NA	NA	PF0VWNUV

### 4.2 System Details

System Number	Description	Sample Description	Samples	System under test	Support equipment
1	Used for 20, 40, 80MHz testing	AIR-AP4800-B-K9	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		Power Supply for EUT	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		Bridge - Client Equipment	S03	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		Power Supply for Bridge	S04	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		Support Laptop	S05	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	Used for 160MHz testing	AIR-AP4800-B-K9	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		Power Supply for EUT	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		Support Laptop	S05	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		Support Laptop	S06	<input type="checkbox"/>	<input checked="" type="checkbox"/>

### 4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	17% Traffic Loading

All measurements were made in accordance with

- KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02



## Appendix A: Dynamic Frequency Selection (DFS)

15.407: U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

### A.1 UNII Device Description

The Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11n/ac - Non HT20, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT20, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT20, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT20, Four Antennas, 6 to 54 Mbps

802.11n/ac - Non HT20 Beam Forming, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT20 Beam Forming, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT20 Beam Forming, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT20, One Antenna, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT20, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Four Antennas, M16 to M23

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20 STBC, Four Antennas, M0 to M7

802.11n/ac - Non HT40 Duplicate, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT40 Duplicate, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT40 Duplicate, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT40 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT40, One Antenna, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT40, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Four Antennas, M16 to M23

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40 STBC, Four Antennas, M0 to M7

802.11n/ac - Non HT80 Duplicate, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT80 Duplicate, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT80 Duplicate, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT80 Duplicate, Four Antennas, 6 to 54 Mbps

802.11ac - VHT80, One Antenna, M0.1 to M9.1  
802.11ac - VHT80, Two Antennas, M0.1 to M9.1  
802.11ac - VHT80, Two Antennas, M0.2 to M9.2  
802.11ac - VHT80, Three Antennas, M0.1 to M9.1  
802.11ac - VHT80, Three Antennas, M0.2 to M9.2  
802.11ac - VHT80, Three Antennas, M0.3 to M9.3  
802.11ac - VHT80, Four Antennas, M0.1 to M9.1  
802.11ac - VHT80, Four Antennas, M0.2 to M9.2  
802.11ac - VHT80, Four Antennas, M0.3 to M9.3

802.11ac - VHT80 Beam Forming, Two Antennas, M0.1 to M9.1  
802.11ac - VHT80 Beam Forming, Two Antennas, M0.2 to M9.2  
802.11ac - VHT80 Beam Forming, Three Antennas, M0.1 to M9.1  
802.11ac - VHT80 Beam Forming, Three Antennas, M0.2 to M9.2  
802.11ac - VHT80 Beam Forming, Three Antennas, M0.3 to M9.3  
802.11ac - VHT80 Beam Forming, Four Antennas, M0.1 to M9.1  
802.11ac - VHT80 Beam Forming, Four Antennas, M0.2 to M9.2  
802.11ac - VHT80 Beam Forming, Four Antennas, M0.3 to M9.3

802.11ac - VHT80 STBC, Two Antennas, M0.1 to M9.1  
802.11ac - VHT80 STBC, Three Antennas, M0.1 to M9.1  
802.11ac - VHT80 STBC, Four Antennas, M0.1 to M9.1

802.11n/ac - Non HT160, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT160, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT160, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT160, Four Antennas, 6 to 54 Mbps

802.11ac - VHT160, One Antenna, M0.1 to M9.1  
802.11ac - VHT160, Two Antennas, M0.1 to M9.1  
802.11ac - VHT160, Two Antennas, M0.2 to M9.2  
802.11ac - VHT160, Three Antennas, M0.1 to M9.1  
802.11ac - VHT160, Three Antennas, M0.2 to M9.2  
802.11ac - VHT160, Three Antennas, M0.3 to M9.3  
802.11ac - VHT160, Four Antennas, M0.1 to M9.1  
802.11ac - VHT160, Four Antennas, M0.2 to M9.2  
802.11ac - VHT160, Four Antennas, M0.3 to M9.3

802.11ac - VHT160 Beam Forming, Two Antennas, M0.1 to M9.1  
802.11ac - VHT160 Beam Forming, Two Antennas, M0.2 to M9.2  
802.11ac - VHT160 Beam Forming, Three Antennas, M0.1 to M9.1  
802.11ac - VHT160 Beam Forming, Three Antennas, M0.2 to M9.2  
802.11ac - VHT160 Beam Forming, Three Antennas, M0.3 to M9.3  
802.11ac - VHT160 Beam Forming, Four Antennas, M0.1 to M9.1

802.11ac - VHT160 Beam Forming, Four Antennas, M0.2 to M9.2  
 802.11ac - VHT160 Beam Forming, Four Antennas, M0.3 to M9.3

802.11ac - VHT160 STBC, Two Antennas, M0.1 to M9.1  
 802.11ac - VHT160 STBC, Three Antennas, M0.1 to M9.1  
 802.11ac - VHT160 STBC, Four Antennas, M0.1 to M9.1

The following antennas are supported by this product series.  
 The data included in this report represent the worst case data for all antennas.

Radio	Frequency	HOST PID   Part Number - Please align Host(s) with antenna(s)	ANTENNA PID   Part Number	Antenna Type	Antenna Gain (includes antenna cable loss)
2.4 GHz BLE	2.4 GHz	TX/RX: Internal	BLE	Single port, single band omni	2.5 dBi
WIFI: 5 GHz XOR	5 GHz	Micro-Cell: Internal	NA	Quad port, single band directional	5 dBi
WIFI: 2.4GHz XOR & 5 GHz Only	2.4 & 5 GHz	Macro-Cell: Internal	NA	Quad port, dual band Omni	2.5 dBi/3.5 dBi
WIFI: RX Only 2.4GHz XOR & 5 GHz XOR	2.4 & 5 GHz	Location Antenna Array	NA	Quad port   Circular Array + Omni Elements	RX Only

1. The maximum EIRP of the 5GHz equipment is 29 dBm, and the minimum possible EIRP is 10 dBm.

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

2. System testing was performed with IPERF traffic that streams continuously at a loading of 17% from the Master to the Client IP based system.
3. The Master requires 217.8s seconds to complete its power-on cycle.
4. Information regarding the parameters of the detected Radar Waveforms is not available to the end user.
5. For the 5250-5350 MHz and 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

## A.2 DFS Detection Thresholds

### 1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note 3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01 v02r01.</p>	

### 2. DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
<p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

### A.3 Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### 1. Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Numbers of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \begin{array}{l} \left( \frac{1}{360} \right) \cdot \\ \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 shall only be used for the channel availability and detection bandwidth tests. It should be noted that any of the radar test waveforms 0 – 4 can be used for the channel availability and detection bandwidth tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.



For example if in Short Pulse Radar Type 1 Test B a PRI of 3066  $\mu$ sec is selected, the number of pulses would be  $\text{Roundup}\left\{\left(\frac{1}{360}\right) \cdot \left(\frac{19 \cdot 10^6}{3066}\right)\right\} = \text{Roundup}\{17.2\} = 18$

**Table 5a – Pulse Repetition Intervals Values for Test A**

<b>Pulse Repetition Frequency Number</b>	<b>Pulse Repetition Frequency (Pulses Per Second)</b>	<b>Pulse Repetition Interval (Microseconds)</b>
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355.0	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139.0	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

<b>Radar Type</b>	<b>Number of Trials</b>	<b>Number of Successful Detections</b>	<b>Minimum Percentage of Successful Detection</b>
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

## 2. Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000- 2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length  $(12,000,000 / \text{Burst Count})$  microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen randomly.

### A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

**Graphical Representation of a Long Pulse radar Test Waveform**

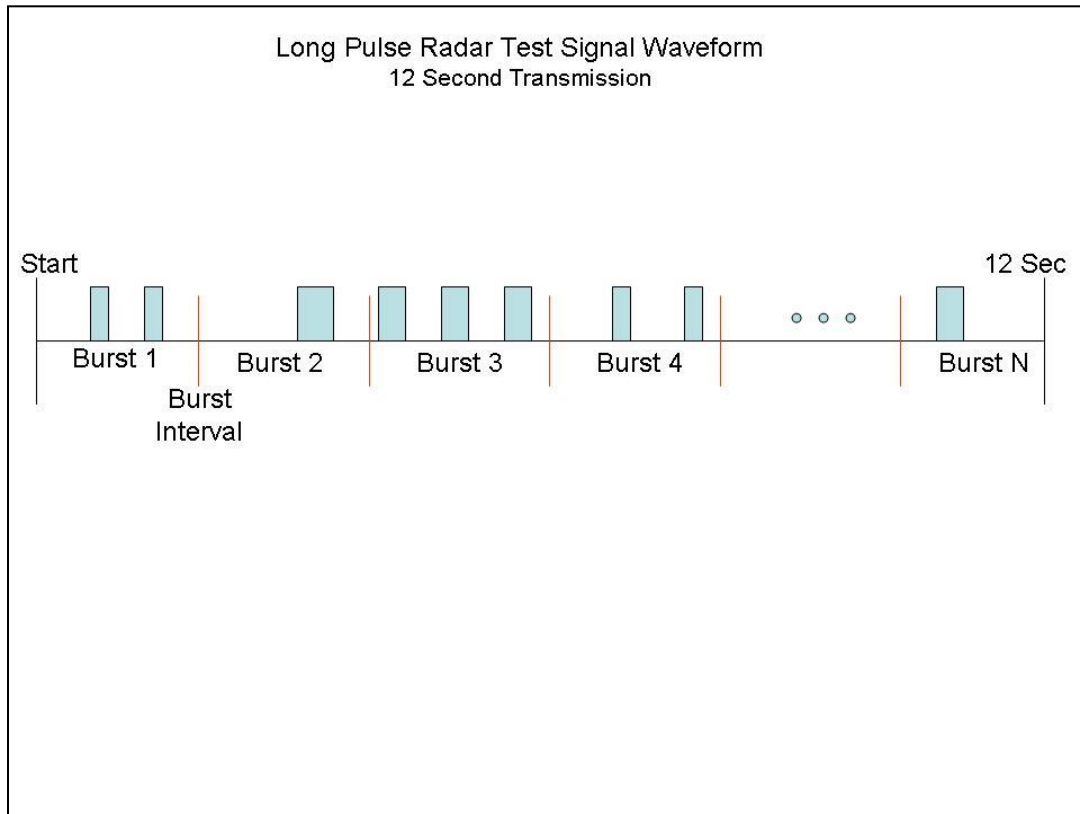

**3. Long Pulse Radar Test Waveform**

Radars Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected<sup>1</sup> from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.





## Appendix B: Dynamic Frequency Selection / Test Results

### Standards Reference:

FCC 15.407 / RSS-247

### Test Procedure

Ref. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

Test parameters
Span = 0 Hz
RBW ≥ 3 MHz
VBW ≥ 3 MHz
Detector = Peak
Trace = Single Sweep

System Number	Description	Samples	System under test	Support equipment
1	AIR-AP4800-B-K9	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support Power Supply	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Support Client Equipment	S03	<input type="checkbox"/>	<input checked="" type="checkbox"/>

### Tested By :

Johanna Knudsen

### Date of testing:


20-APR-18 - 21-MAY-18

### Test Result : **PASS**

See Appendix C for list of test equipment

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -63dBm.

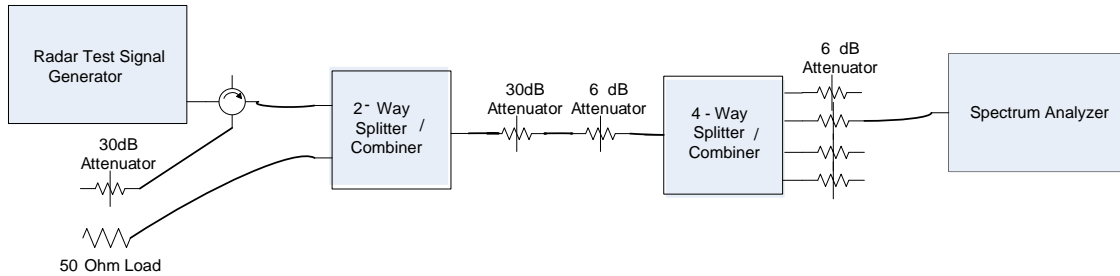


**Conducted Calibration Setup**




Following are the calibration plots for each of the required radar waveforms.

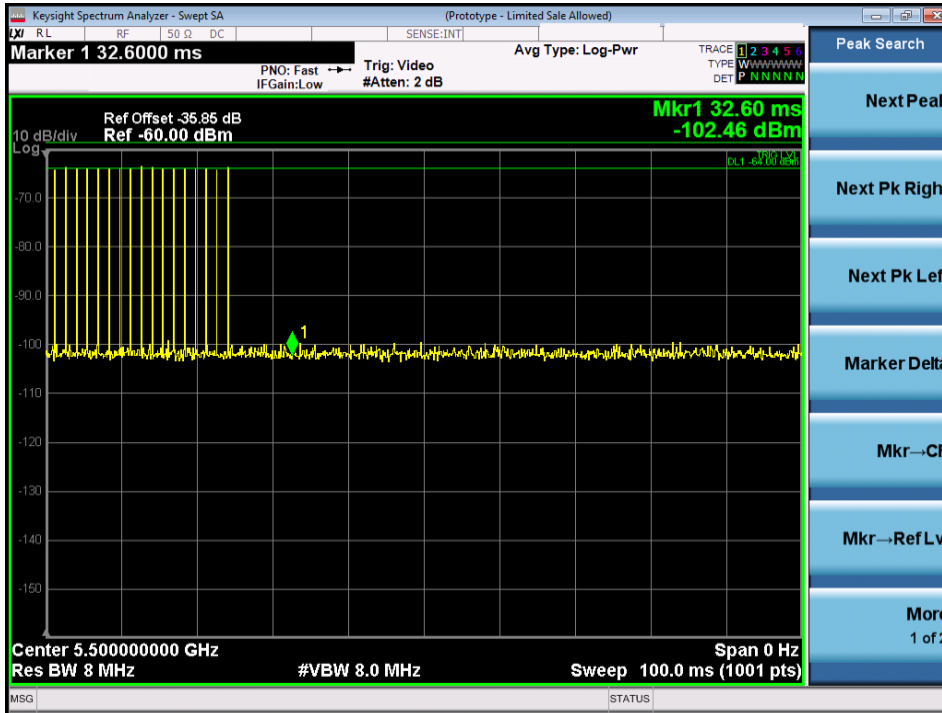


**USA Bin 0 Radar Calibration BW20**

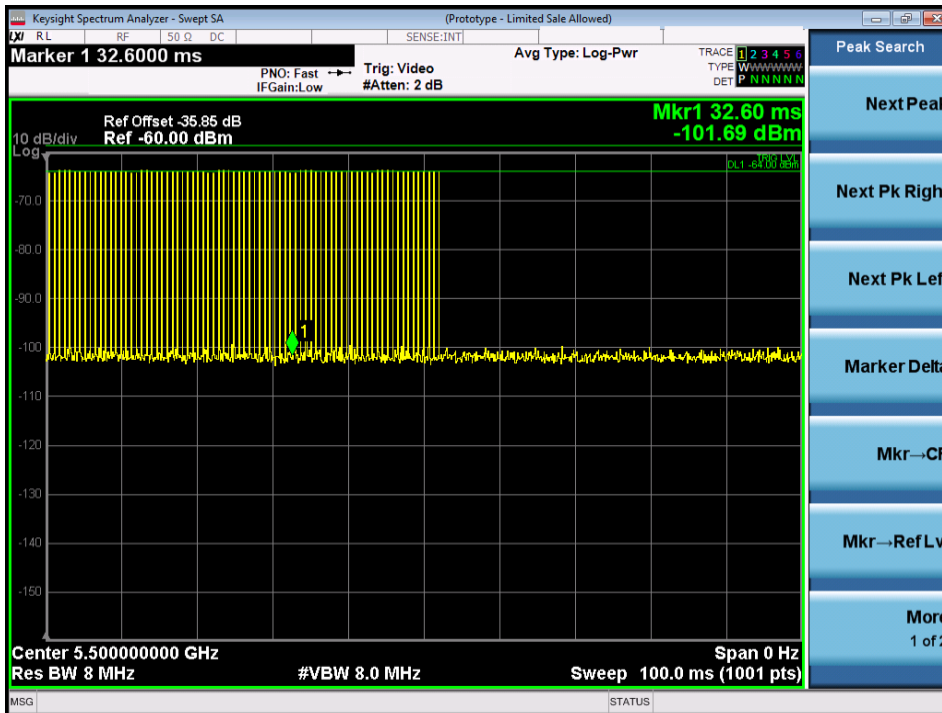


**USA Bin 1A Radar Calibration BW20**

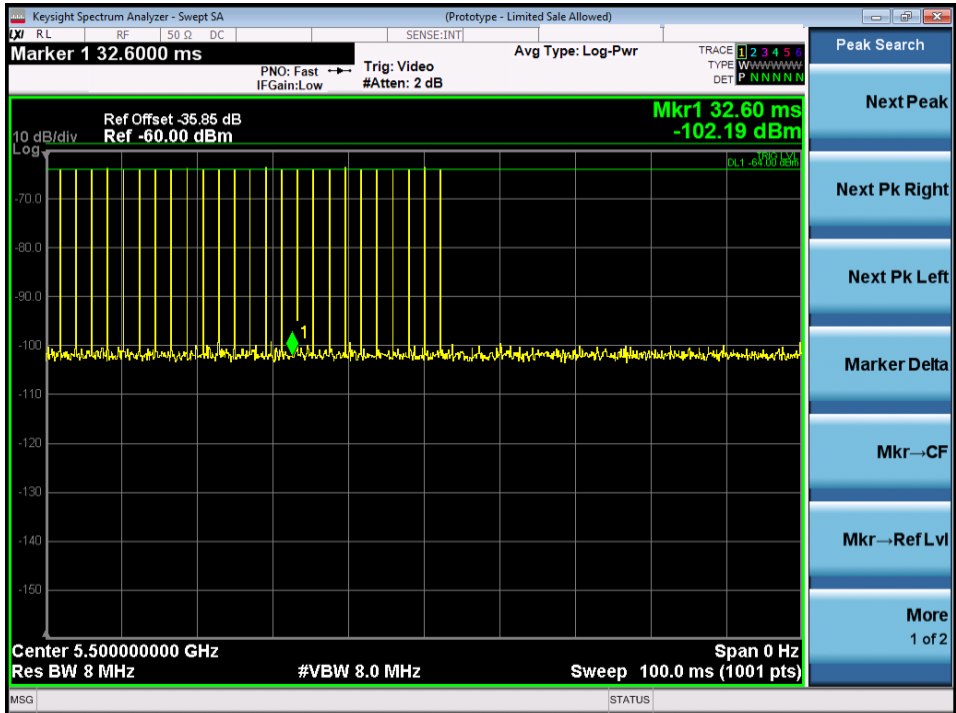


**USA Bin 1B Radar Calibration BW20**

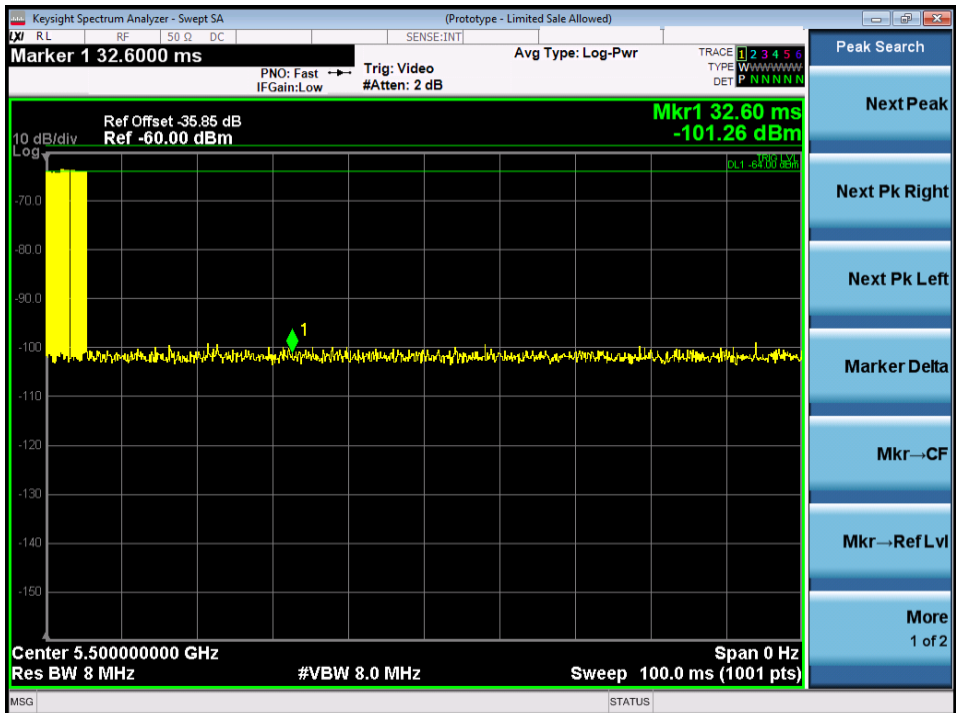


**USA Bin 2 Radar Calibration BW20**

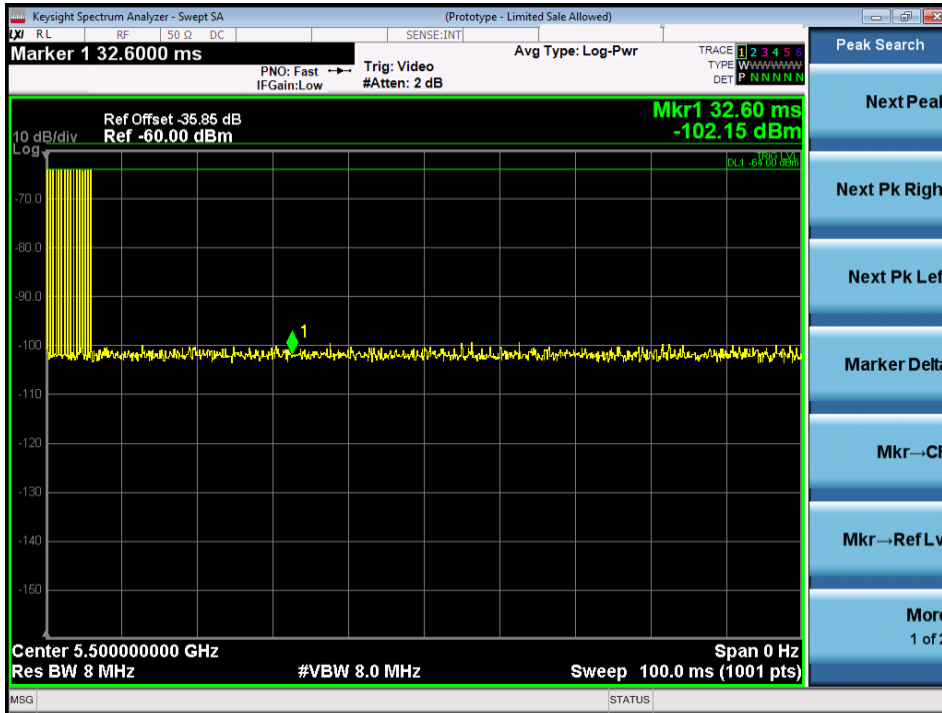


**USA Bin 3 Radar Calibration BW20**

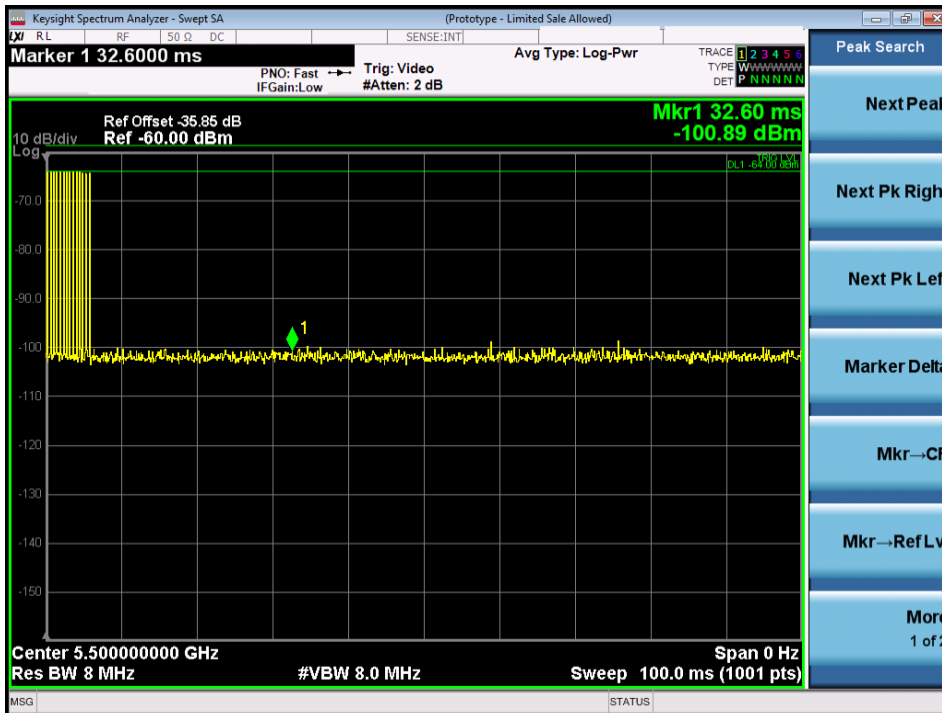


**USA Bin 4 Radar Calibration BW20**

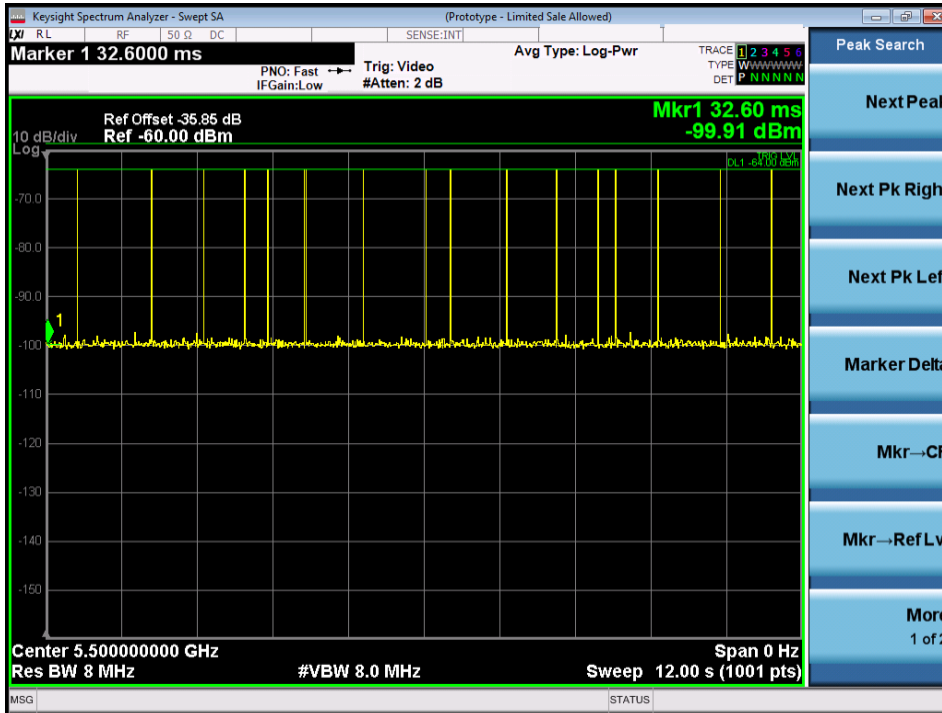


**USA Bin 5 Radar Calibration BW20**

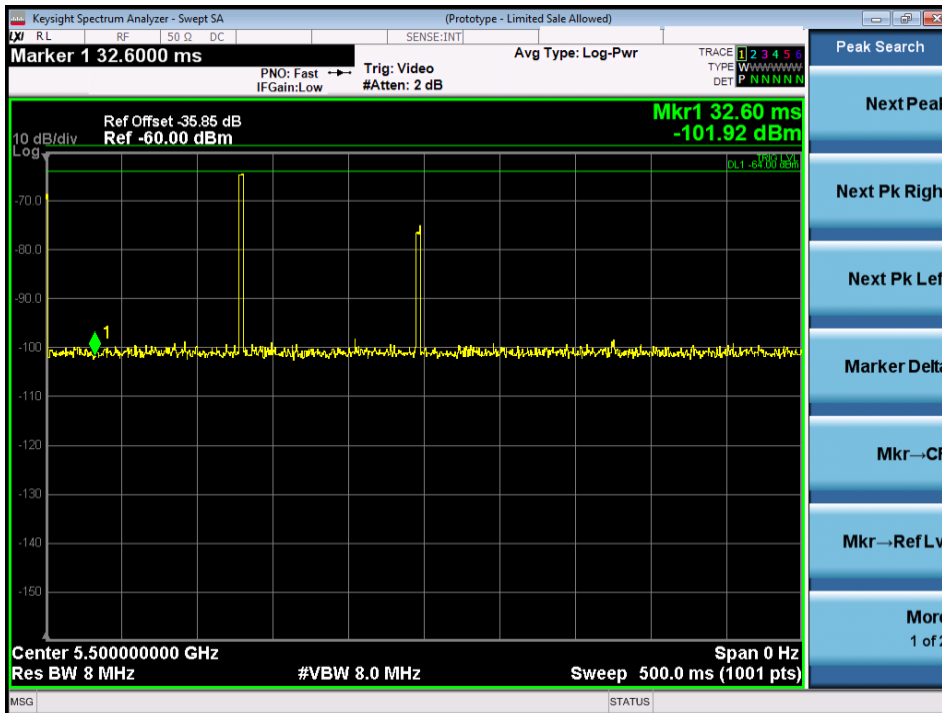


**USA Frequency Hopping Radar Calibration BW20**

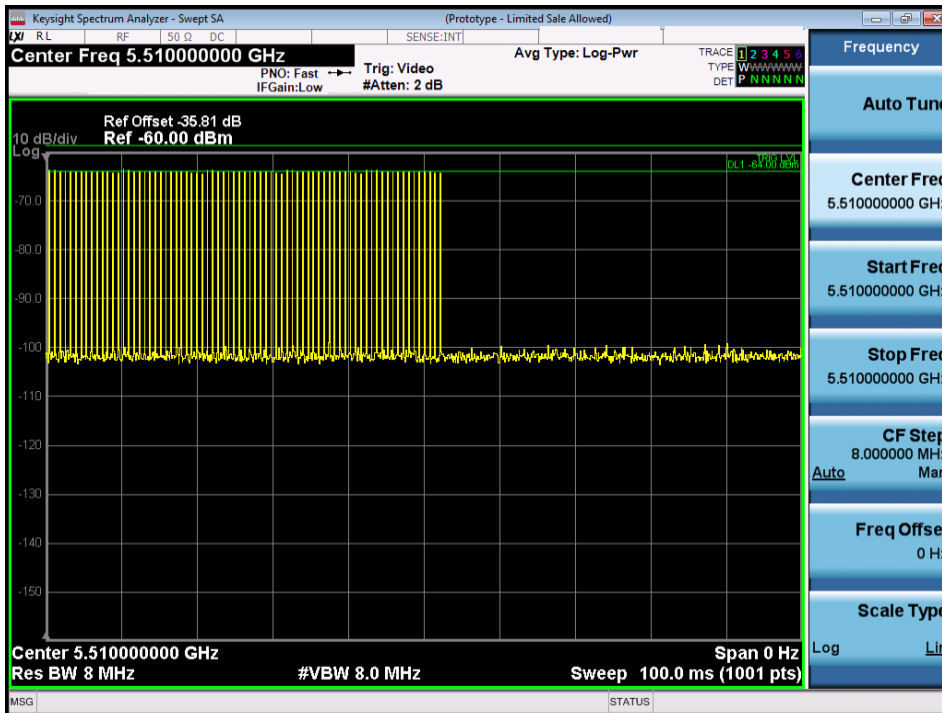


**USA Bin 1A Radar Calibration BW40**

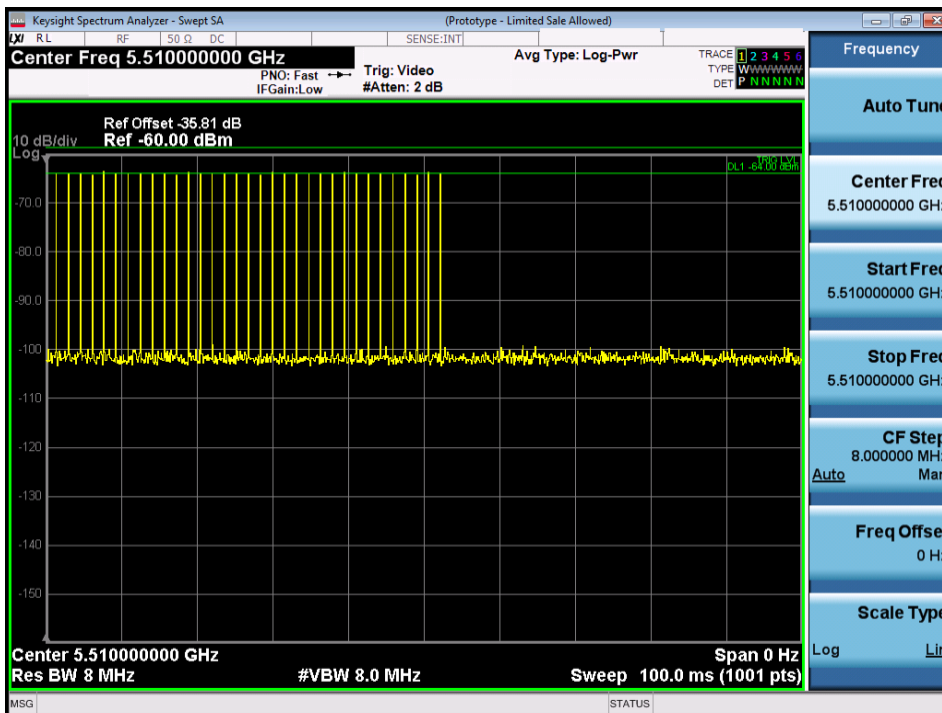

**USA Bin 1B Radar Calibration BW40**

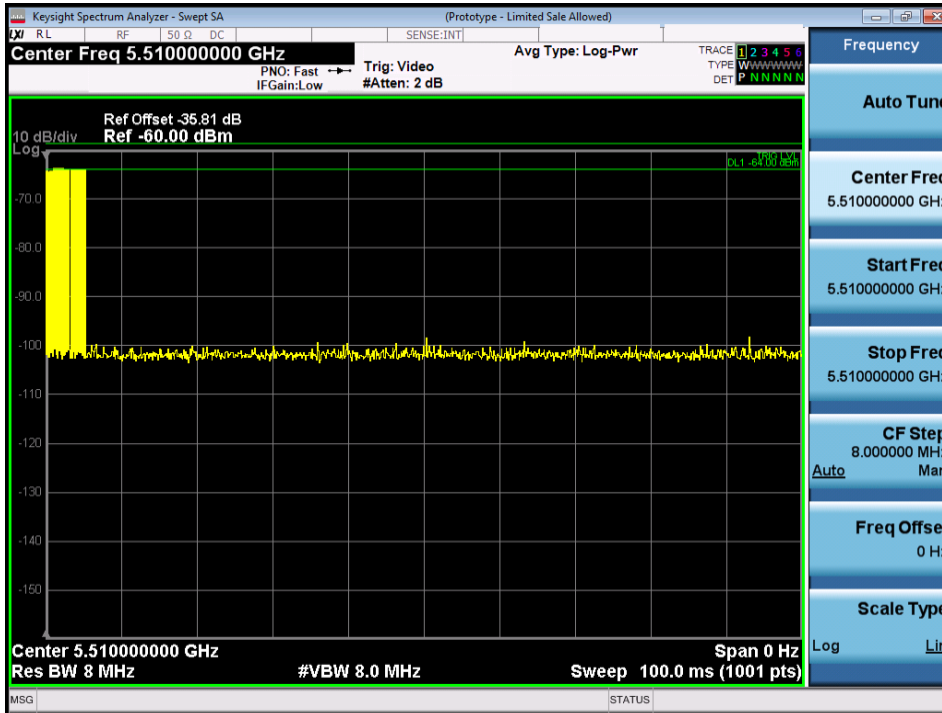


**USA Bin 2 Radar Calibration BW40**

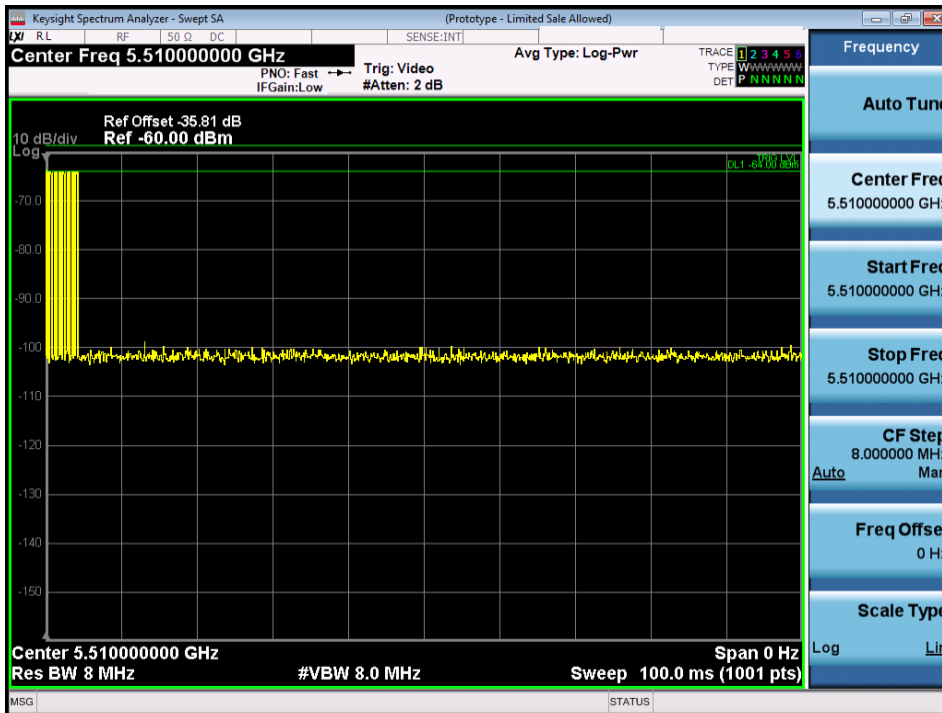


**USA Bin 3 Radar Calibration BW40**




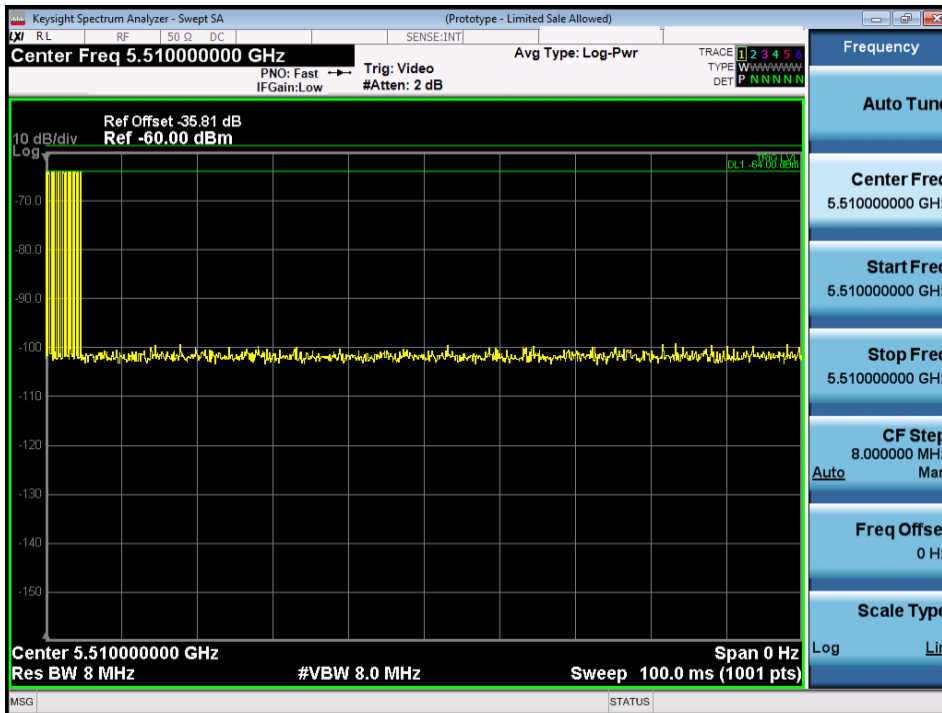


**USA Bin 4 Radar Calibration BW40**

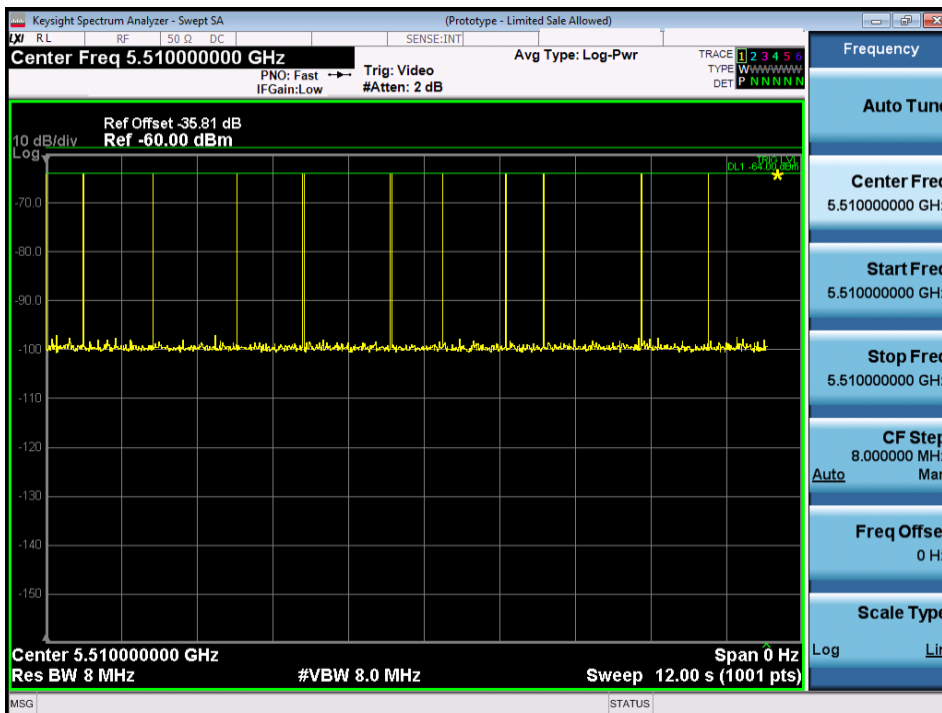


**USA Bin 5 Radar Calibration BW40**

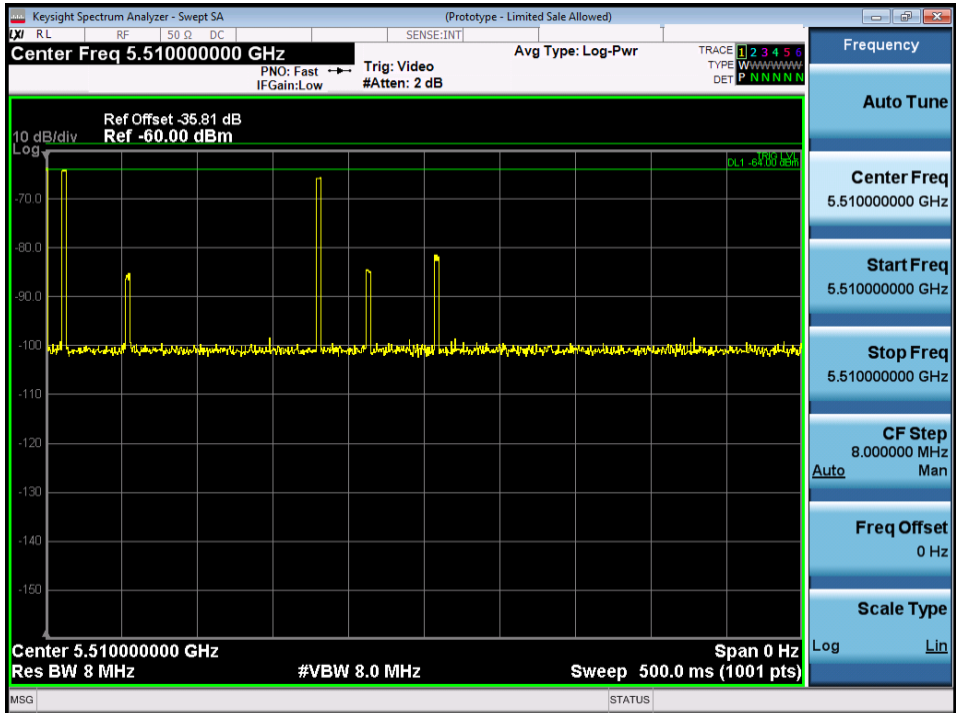


**USA Frequency Hopping Radar Calibration BW40**

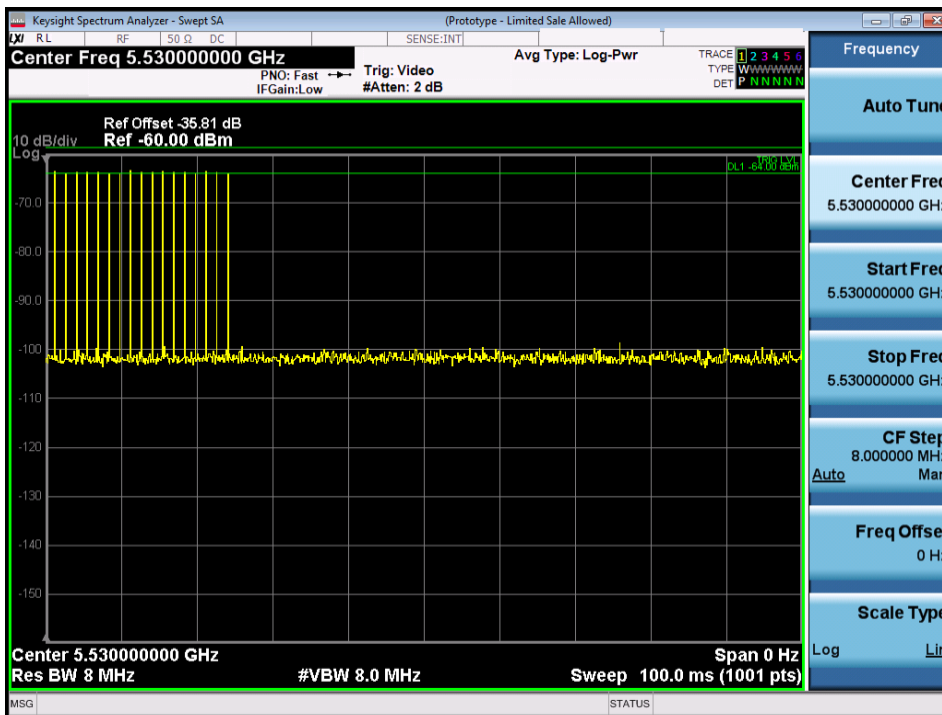


**USA Bin 0 Radar Calibration BW80**

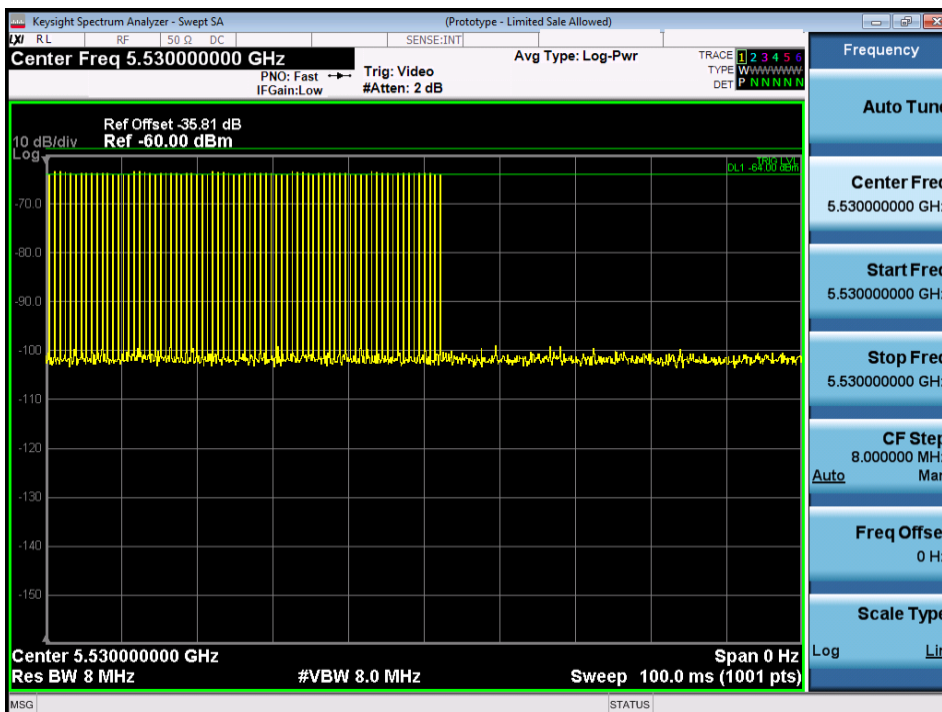


**USA Bin 1A Radar Calibration BW80**

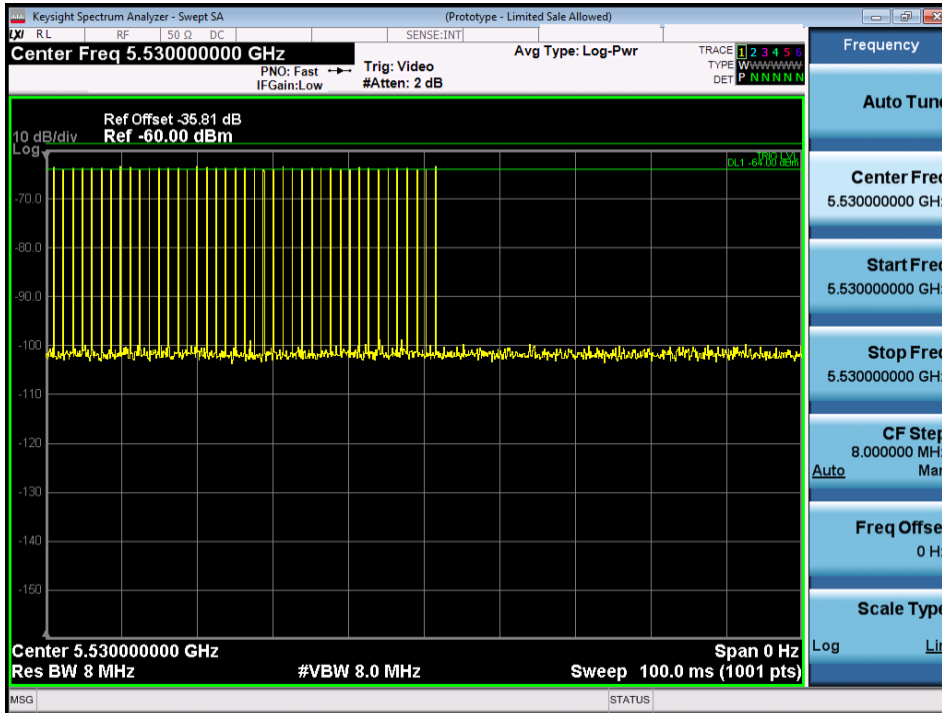


**USA Bin 1B Radar Calibration BW80**

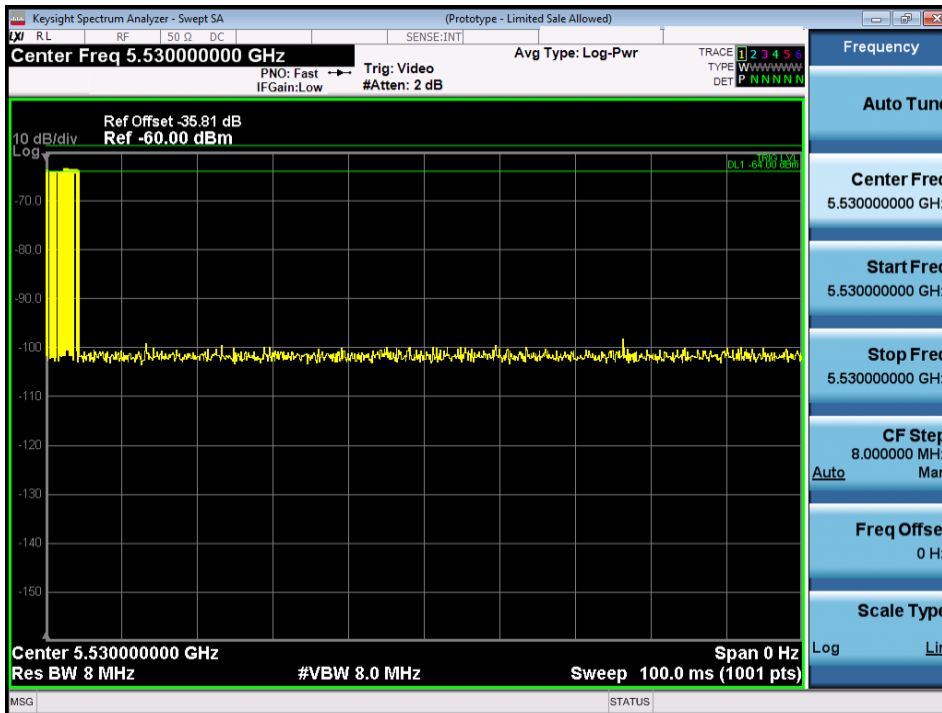


**USA Bin 2 Radar Calibration BW80**

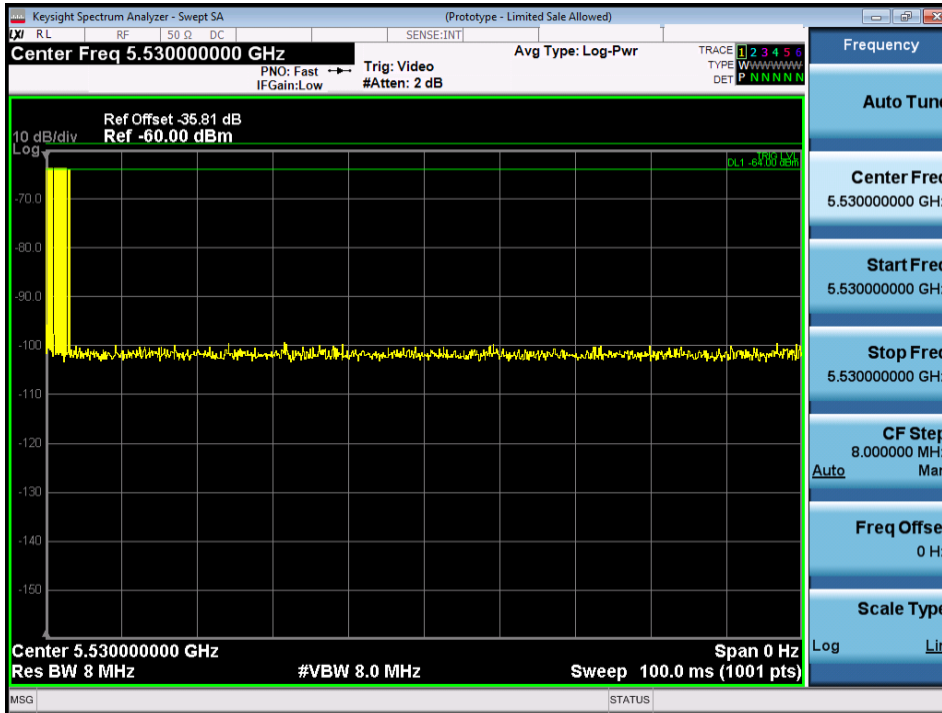


**USA Bin 3 Radar Calibration BW80**

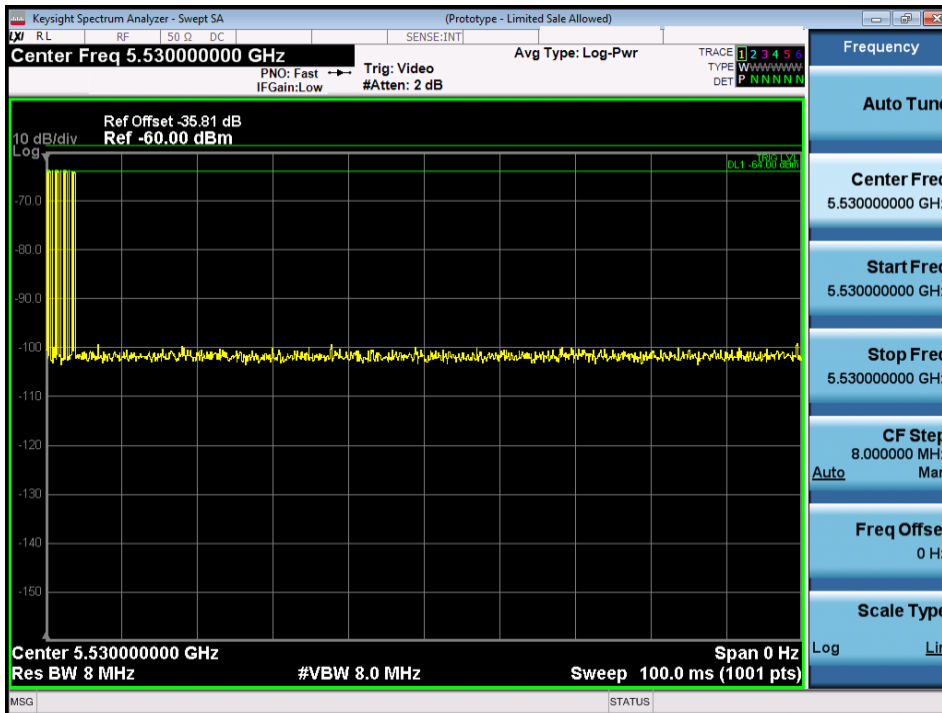


**USA Bin 4 Radar Calibration BW80**

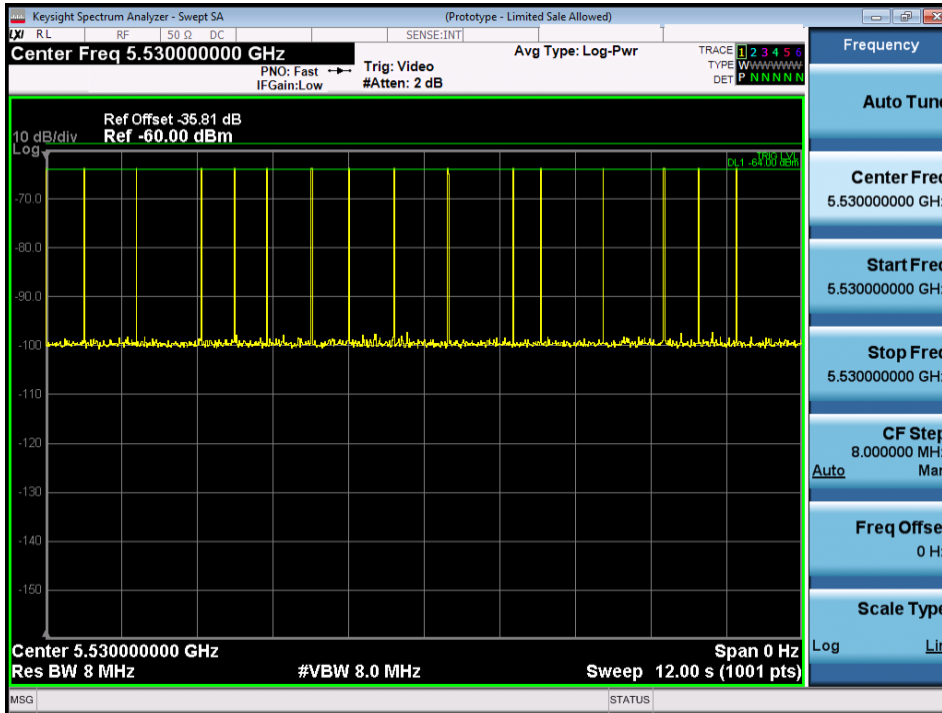


**USA Bin 5 Radar Calibration BW80**

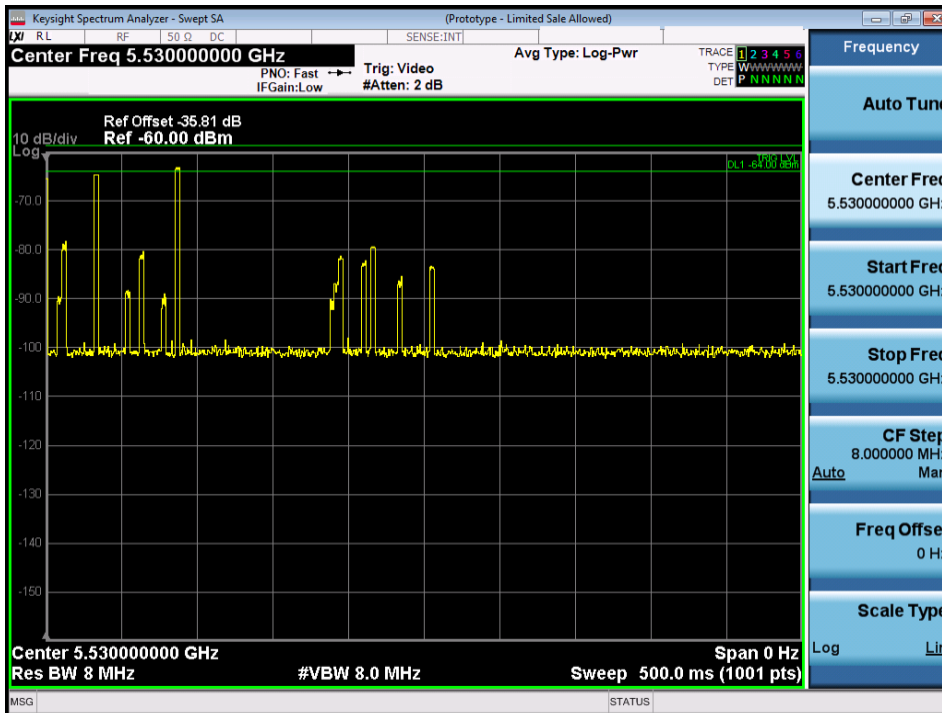


**USA Frequency Hopping Radar Calibration BW80**

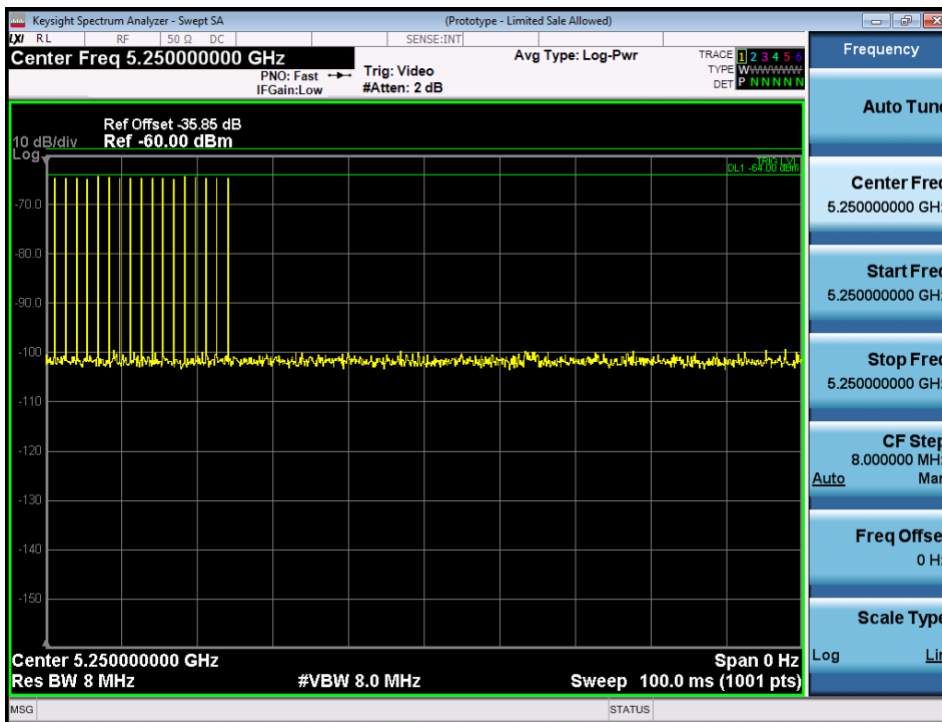


**USA Bin 0 Radar Calibration BW160**

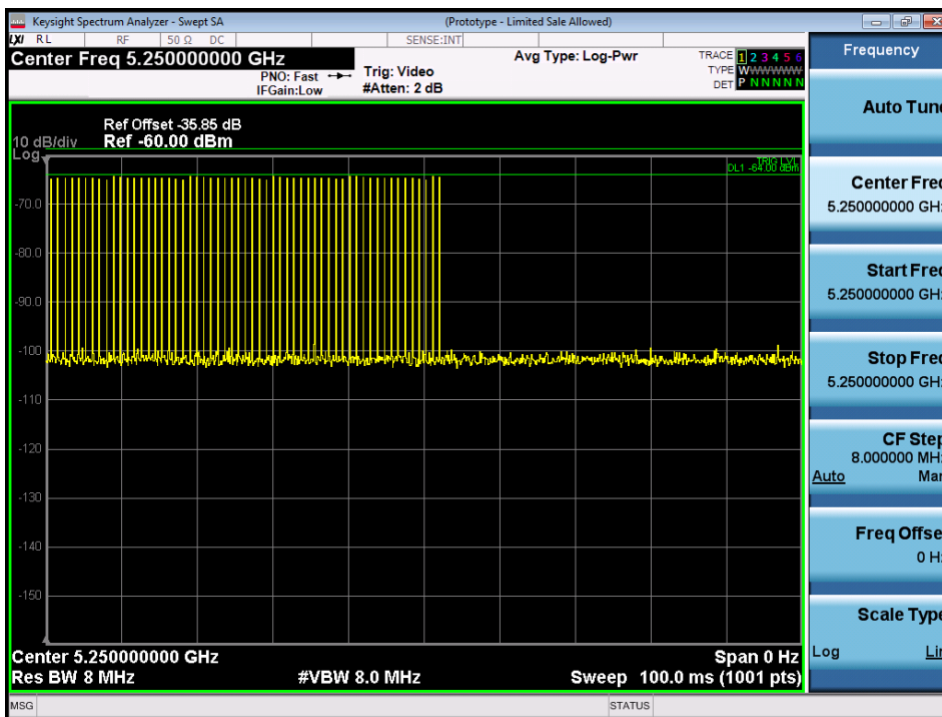

**USA Bin 1A Radar Calibration BW160**

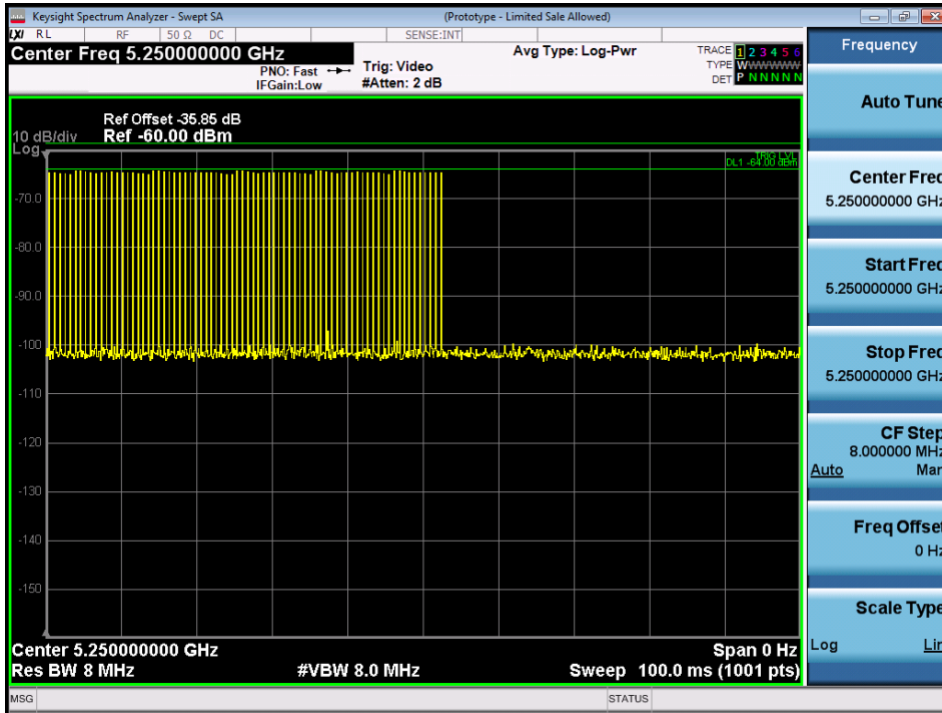

**USA Bin 1B Radar Calibration BW160**

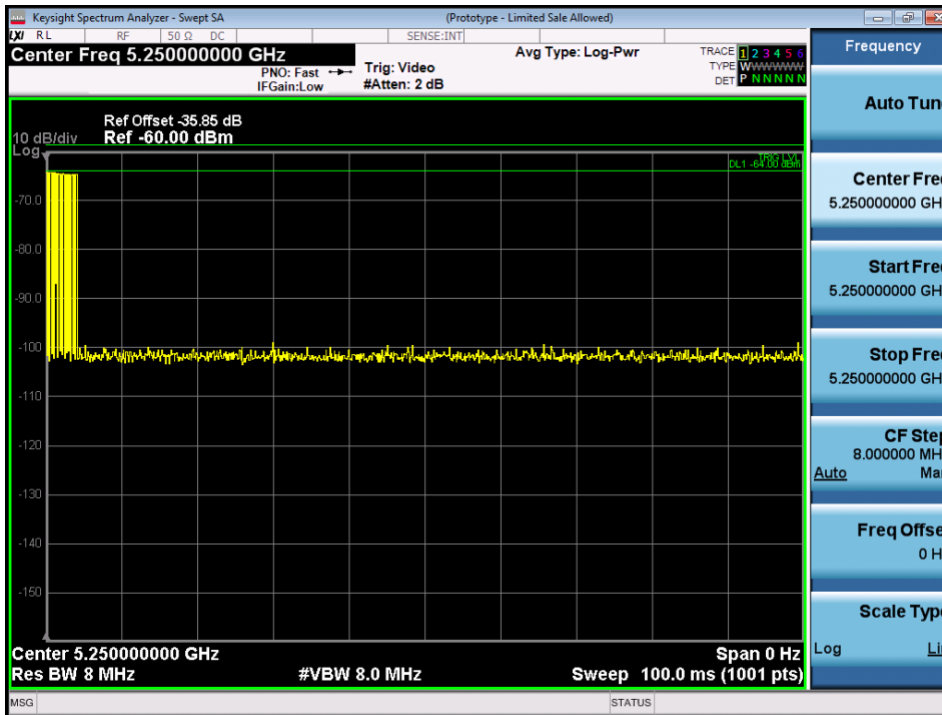

**USA Bin 2 Radar Calibration BW160**