


8 7 6 5 4 3 2 1

| --REVISION-- | | | | |
|--------------|---------------------|---------|---------|-----|
| REV | DESCRIPTION | ECN | APPROVE | |
| | | | MECH | MFG |
| 01 | PRELIMINARY RELEASE | Exxxxxx | TPS | |
| | | | | |
| | | | | |

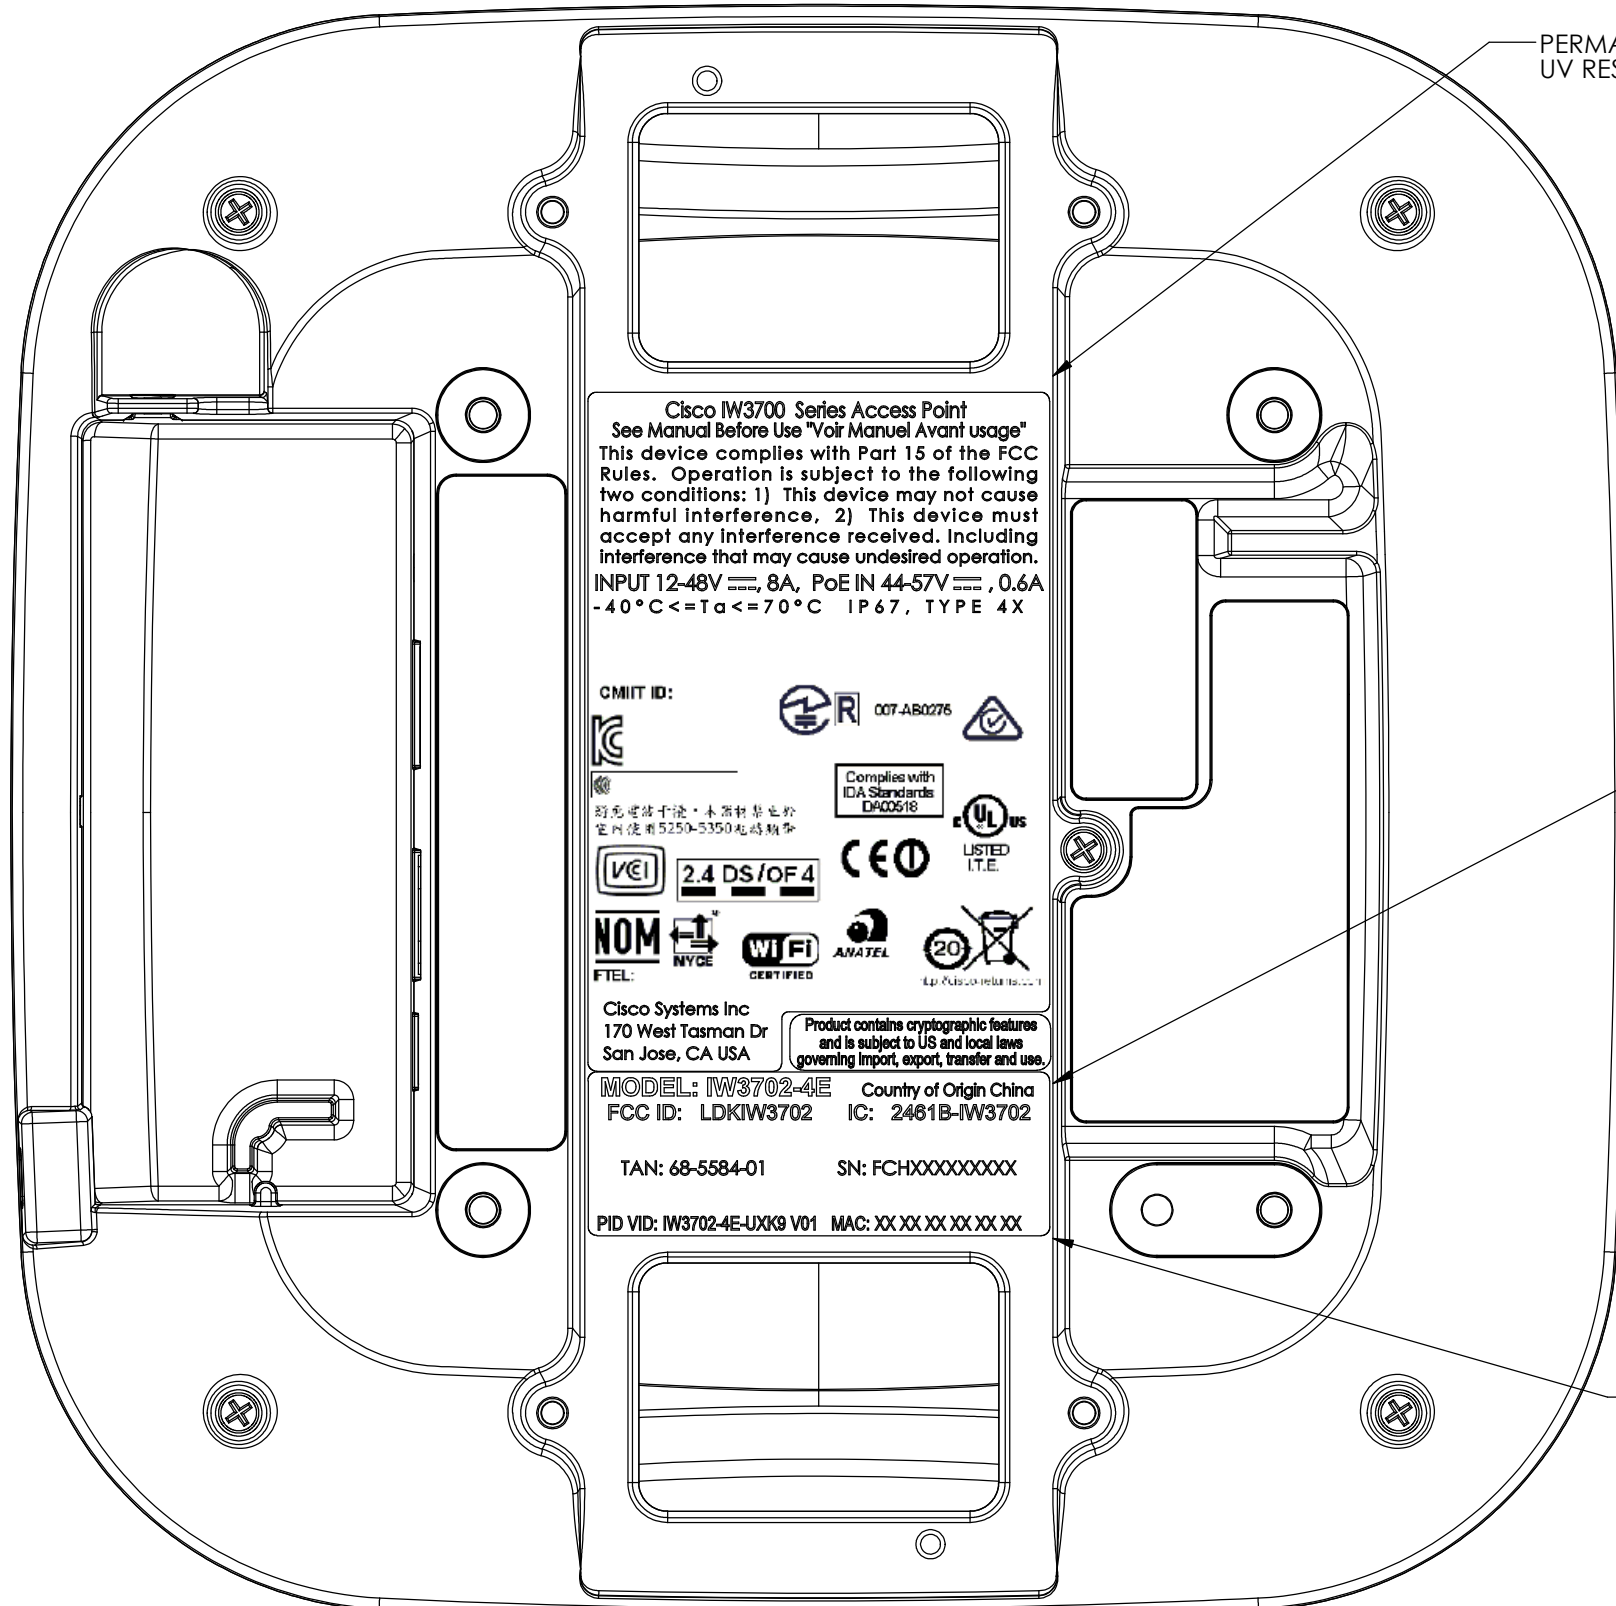

PERMANENTLY ATTACHED
UV RESISTANT LABEL

MODEL: IW3702-4E Country of Origin China
FCC ID: LDKIW3702 IC: 2461B-IW3702

TAN: 68-5584-01 SN: FCHXXXXXXXXX

PID VID: IW3702-4E-UXX9 V01 MAC: XX XX XX XX XX XX

MODEL: IW3702-2E Country of Origin China
FCC ID: LDKIW3702 IC: 2461B-IW3702

TAN: 68-5735-01 SN: FCHXXXXXXXXX

PID VID: IW3702-2E-UXX9 V01 MAC: XX XX XX XX XX XX

MODEL: IW3702-2E Country of Origin China
FCC ID: LDKIW3702 IC: 2461B-IW3702

TAN: 68-5735-01 SN: FCHXXXXXXXXX

PID VID: IW3702H-2E-UXX9 V01 MAC: XX XX XX XX XX XX

MODEL: IW3702-4E Country of Origin China
FCC ID: LDKIW3702 IC: 2461B-IW3702

TAN: 68-5584-01 SN: FCHXXXXXXXXX

PID VID: IW3702H-4E-UXX9 V01 MAC: XX XX XX XX XX XX

LOCATE LABEL IN RECESSED POCKET AS SHOWN

Cisco IW3700 Series Access Point
See Manual Before Use "Voir Manuel Avant usage"
This device complies with Part 15 of the FCC
Rules. Operation is subject to the following
two conditions: 1) This device may not cause
harmful interference, 2) This device must
accept any interference received, including
interference that may cause undesired operation.
INPUT 12-48V $\bar{\sim}$, 8A, PoE IN 44-57V $\bar{\sim}$, 0.6A
-40°C <= Ta <= 70°C IP67, TYPE 4X

CMIIT ID: 007-AB0276

Complies with
IDA Standards
D900518

符合电磁干扰标准，本产品禁止在
室内使用5250-5350兆赫频率

2.4 DS/OF4 LISTED
I.T.E.

FTEL:

Cisco Systems Inc
170 West Tasman Dr
San Jose, CA USA

Product contains cryptographic features
and is subject to US and local laws
governing import, export, transfer and use.

MODEL: IW3702-4E Country of Origin China
FCC ID: LDKIW3702 IC: 2461B-IW3702

TAN: 68-5584-01 SN: FCHXXXXXXXXX

PID VID: IW3702-4E-UXX9 V01 MAC: XX XX XX XX XX XX

| | | | | | |
|--|--------------------------------|--|------------|---------------------------------|----------------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES: TOLERANCES: X.X = ±.030 X.XX = ±.015 X.XXX = ±.005 ANGULAR = ± 0°30' | | THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF CISCO SYSTEMS. THIS DRAWING IS CONFIDENTIAL AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF CISCO SYSTEMS. | | | |
| 3RD ANGLE PROJECTION | | APPROVAL | DATE | REFDWG, LABEL ATTACH 370X AP | |
| MATERIAL: | DES: ENG: T. Spivey MFG: | | 5/18/15 | | |
| FINISH: | DO NOT SCALE DRAWING | | SCALE: 1:2 | MODEL FILE: 370X-LABEL-XX | REV 01 |
| | | | SHT 1 OF 1 | | CAD TYPE: SOLIDWORKS |

8 7 6 5 4 3 2 1